

CONTENTS

SEMICONDUCTOR SHAPES 2-2

BLOCK DIAGRAM 2-3

CIRCUIT DIAGRAMS

MAIN PWB CIRCUIT DIAGRAM 2-5

POWER & DEF PWB CIRCUIT DIAGRAM 2-9

CRT SOCKET PWB CIRCUIT DIAGRAM 2-11

FRONT CONTROL PWB CIRCUIT DIAGRAM 2-13

AV SEL. PWB CIRCUIT DIAGRAM 2-15

PATTERN DIAGRAMS

MAIN PWB PATTERN [SJK-1022A-H2] 2-17

POWER & DEF PWB PATTERN [SJK-2022A-H2] 2-19


CRT SOCKET PWB PATTERN [SJK-3011A-H2] 2-21

FRONT CONTROL PWB PATTERN [SJK-8011A-H2] 2-23


AV SEL. PWB PATTERN [SJK0S003A-H2] 2-25

SEMICONDUCTOR SHAPES


TRANSISTOR

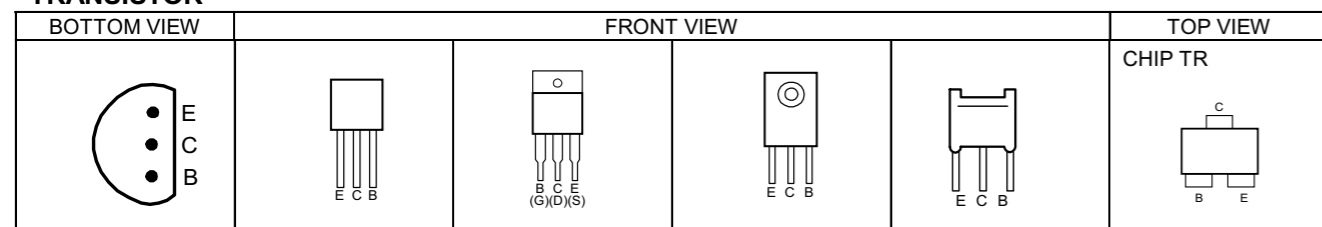

IC

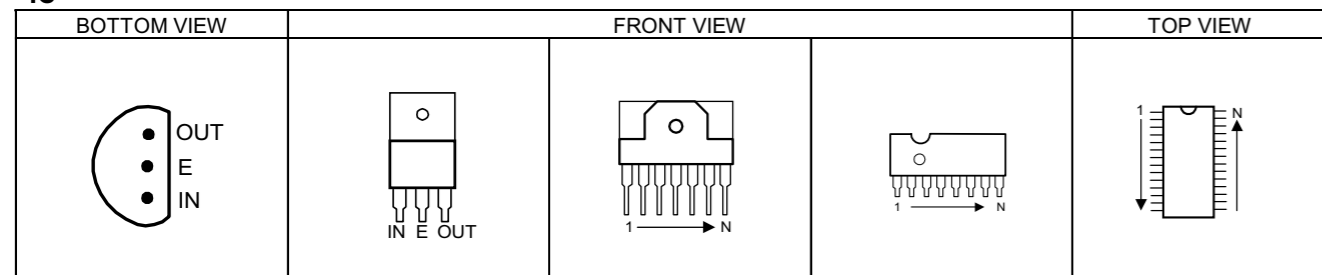

CHIP IC

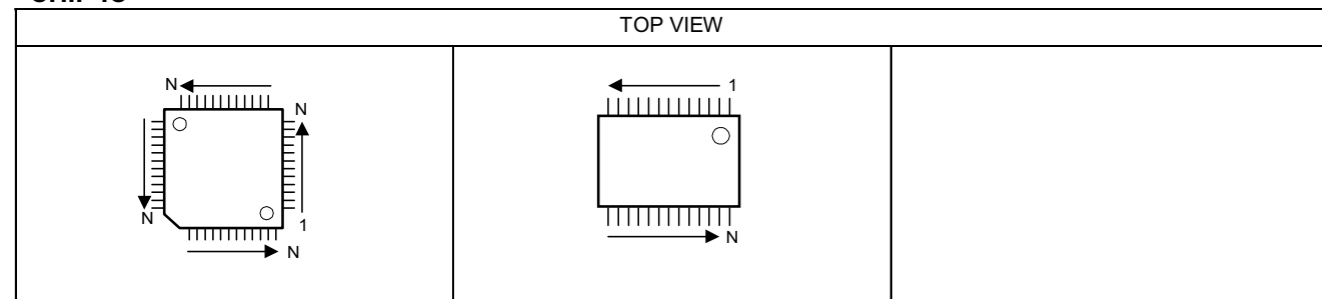

AV-29RS(C-M) STANDARD CIRCUIT DIAGRAM

NOTE ON USING CIRCUIT DIAGRAMS

1. SAFETY

The components identified by the Δ symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

2. SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1) Input signal : Colour bar signal
 - (2) Setting positions of each knob/button and variable resistor : Original setting position when shipped
 - (3) Internal resistance of tester : DC 20k Ω /V
 - (4) Oscilloscope sweeping time : H \Rightarrow 20 μ S/div
: V \Rightarrow 5mS/div
: Others \Rightarrow Sweeping time is specified
 - (5) Voltage values : All DC voltage values
- * Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3. INDICATION OF PARTS SYMBOL [EXAMPLE]

● In the PW board : R1209 \rightarrow R209

4. INDICATIONS ON THE CIRCUIT DIAGRAM

(1) Resistors

- Resistance value
 - No unit : [Ω]
 - K : [K Ω]
 - M : [M Ω]
- Rated allowable power
 - No indication : 1/10[W]
 - Others : As specified

● Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflammable resistor
- FR : Fusible resistor

*Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2) Capacitors

- Capacitance value
 - 1 or higher : [pF]
 - less than 1 : [μ F]
- Withstand voltage
 - No indication : DC50[V]
 - AC indicated : AC withstand voltage [V]
 - Others : DC withstand voltage [V]

*Electrolytic Capacitors
47/50[Example]:Capacitance value [μ F]/withstand voltage[V]

- Type
 - No indication : Ceramic capacitor
 - MY : Mylar capacitor
 - MM : Metalized mylar capacitor
 - PP : Polypropylene capacitor
 - MPP : Metalized polypropylene capacitor
 - MF : Metalized film capacitor
 - TF : Thin film capacitor
 - BP : Bipolar electrolytic capacitor
 - TAN : Tantalum capacitor

(3) Coils


- No unit : [μ H]
- Others : As specified

(4) Power Supply




*Respective voltage values are indicated


(5) Test point



(6) Connecting method

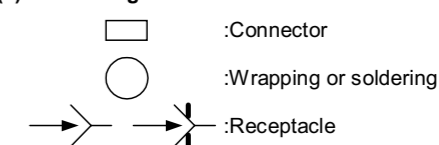

(7) Ground symbol

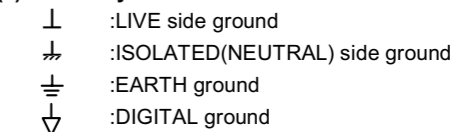


5. NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE (\perp) side GND and the ISOLATED(NEUTRAL) : (\neq) side GND. Therefore, care must be taken for the following points.

- (1) Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. If the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2) Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.


◇ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

BLOCK DIAGRAM

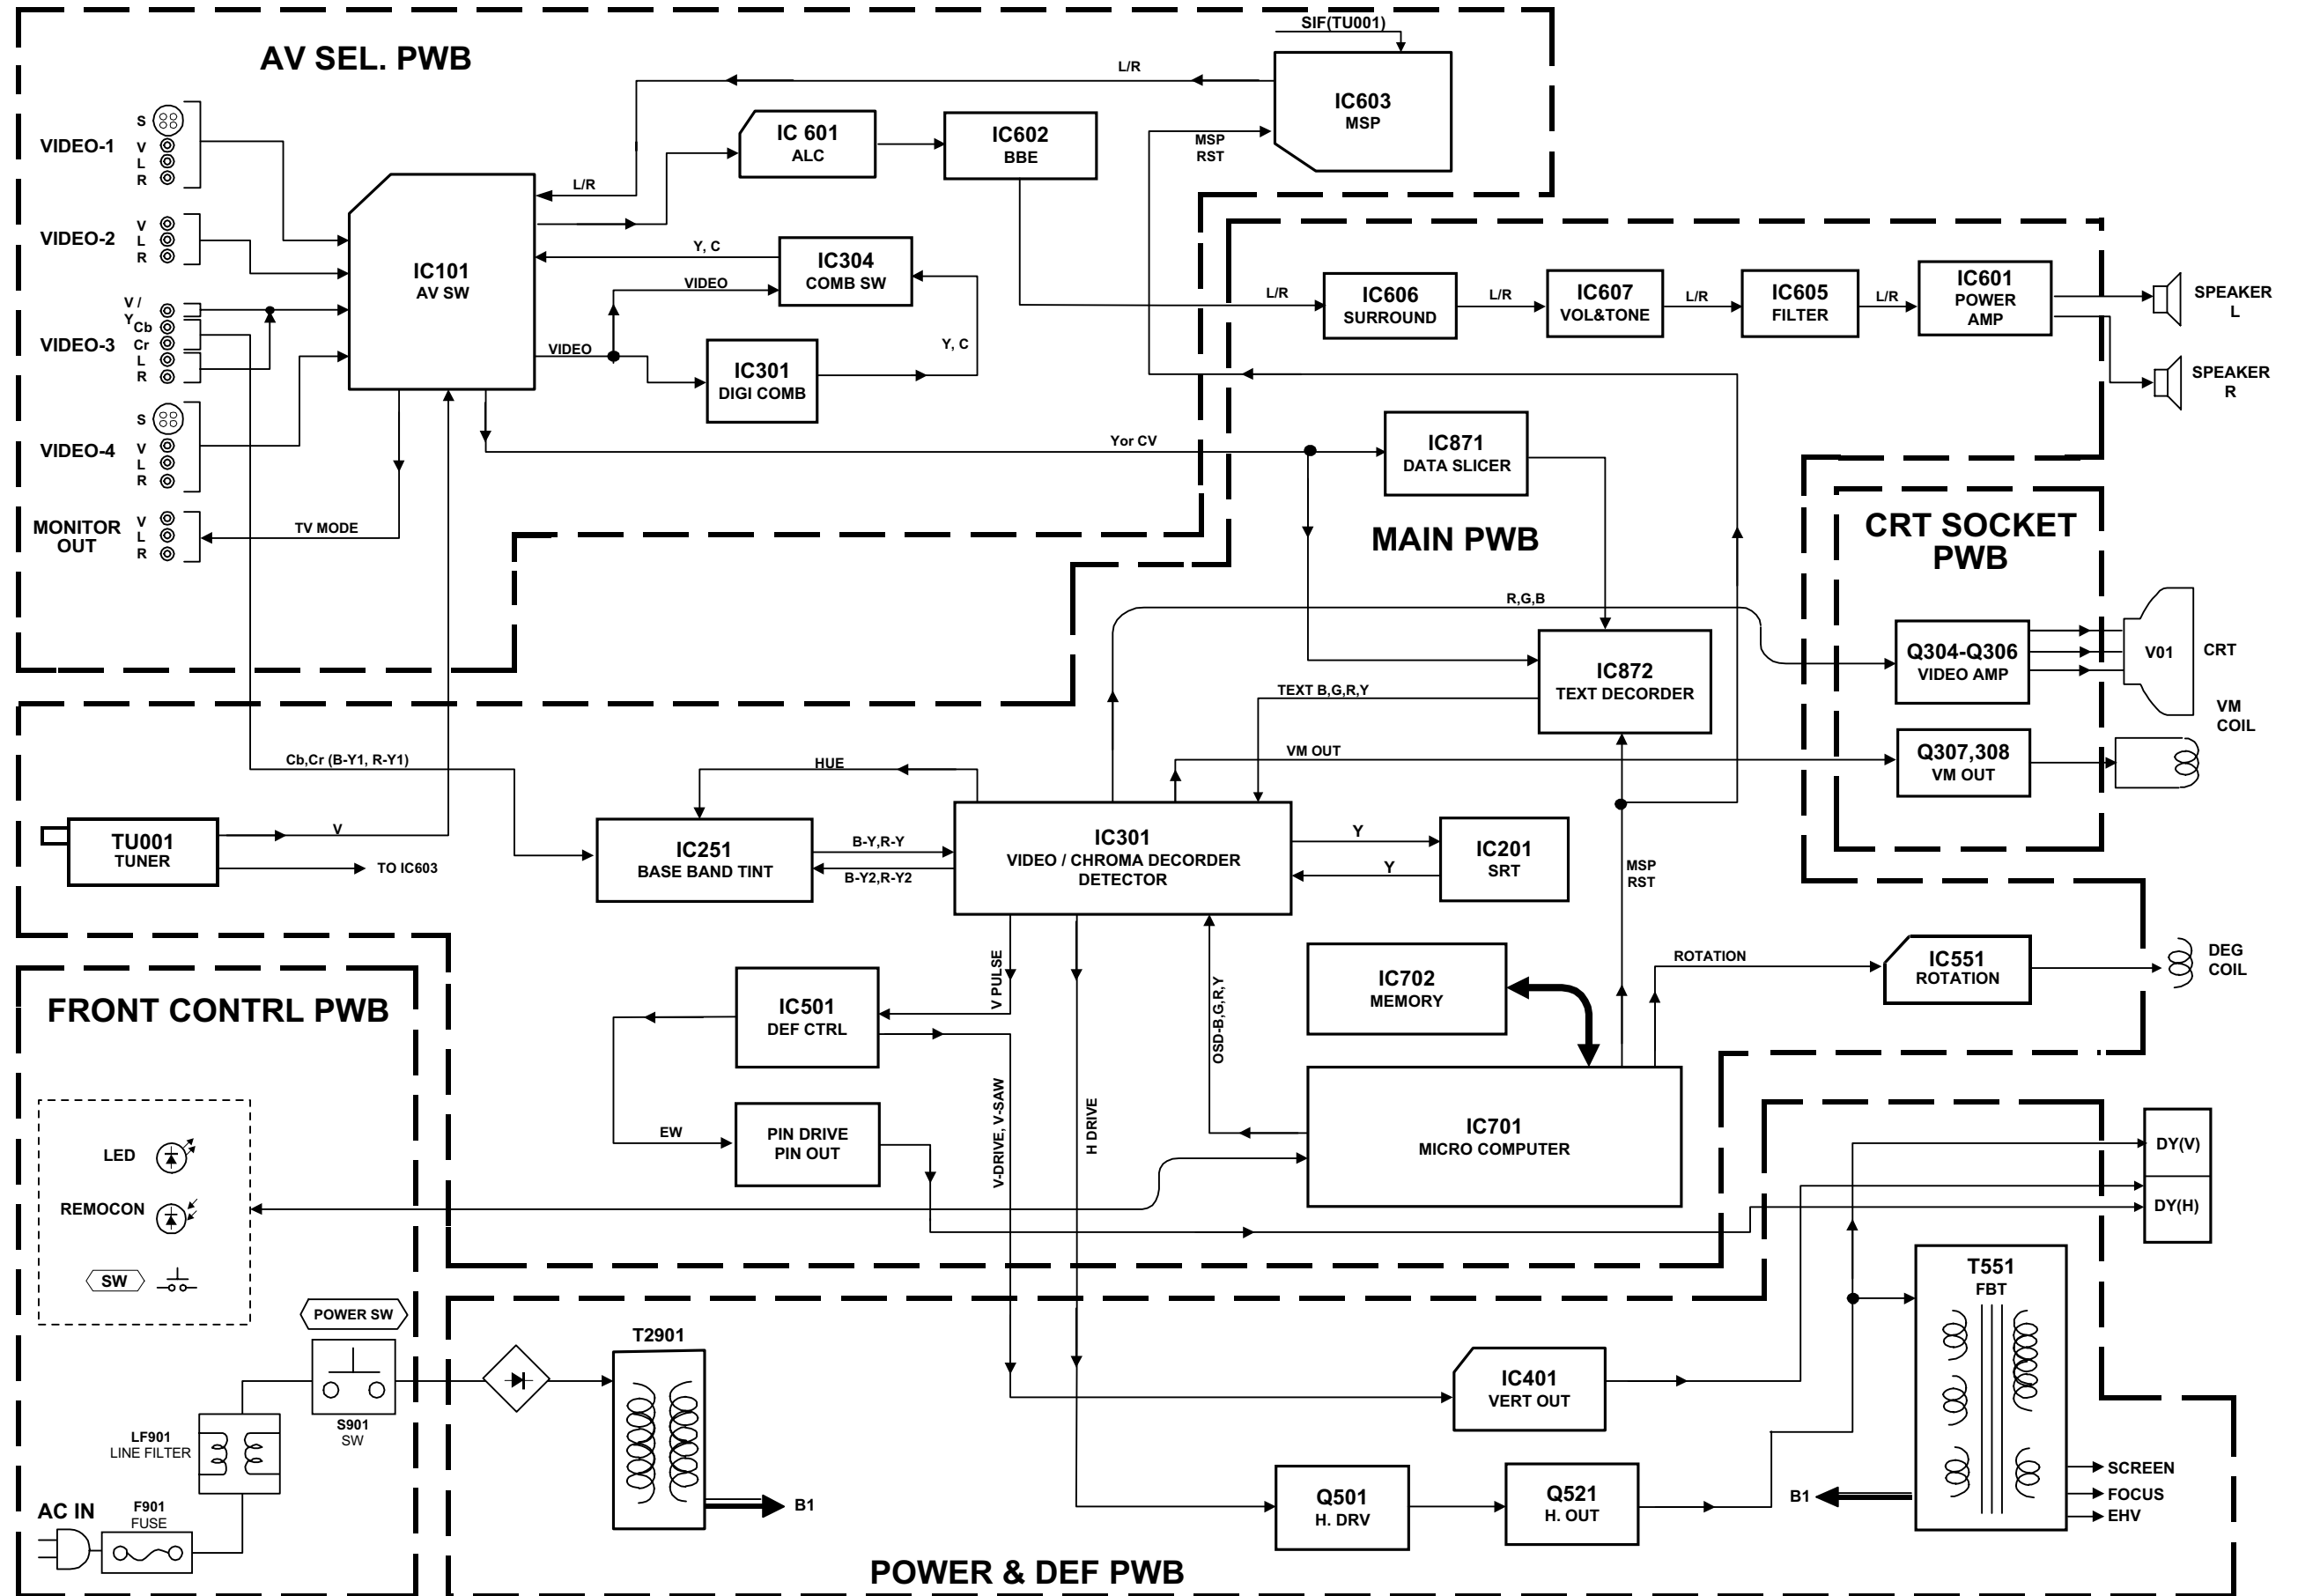

CIRCUIT DIAGRAMS


MAIN PWB CIRCUIT DIAGRAM

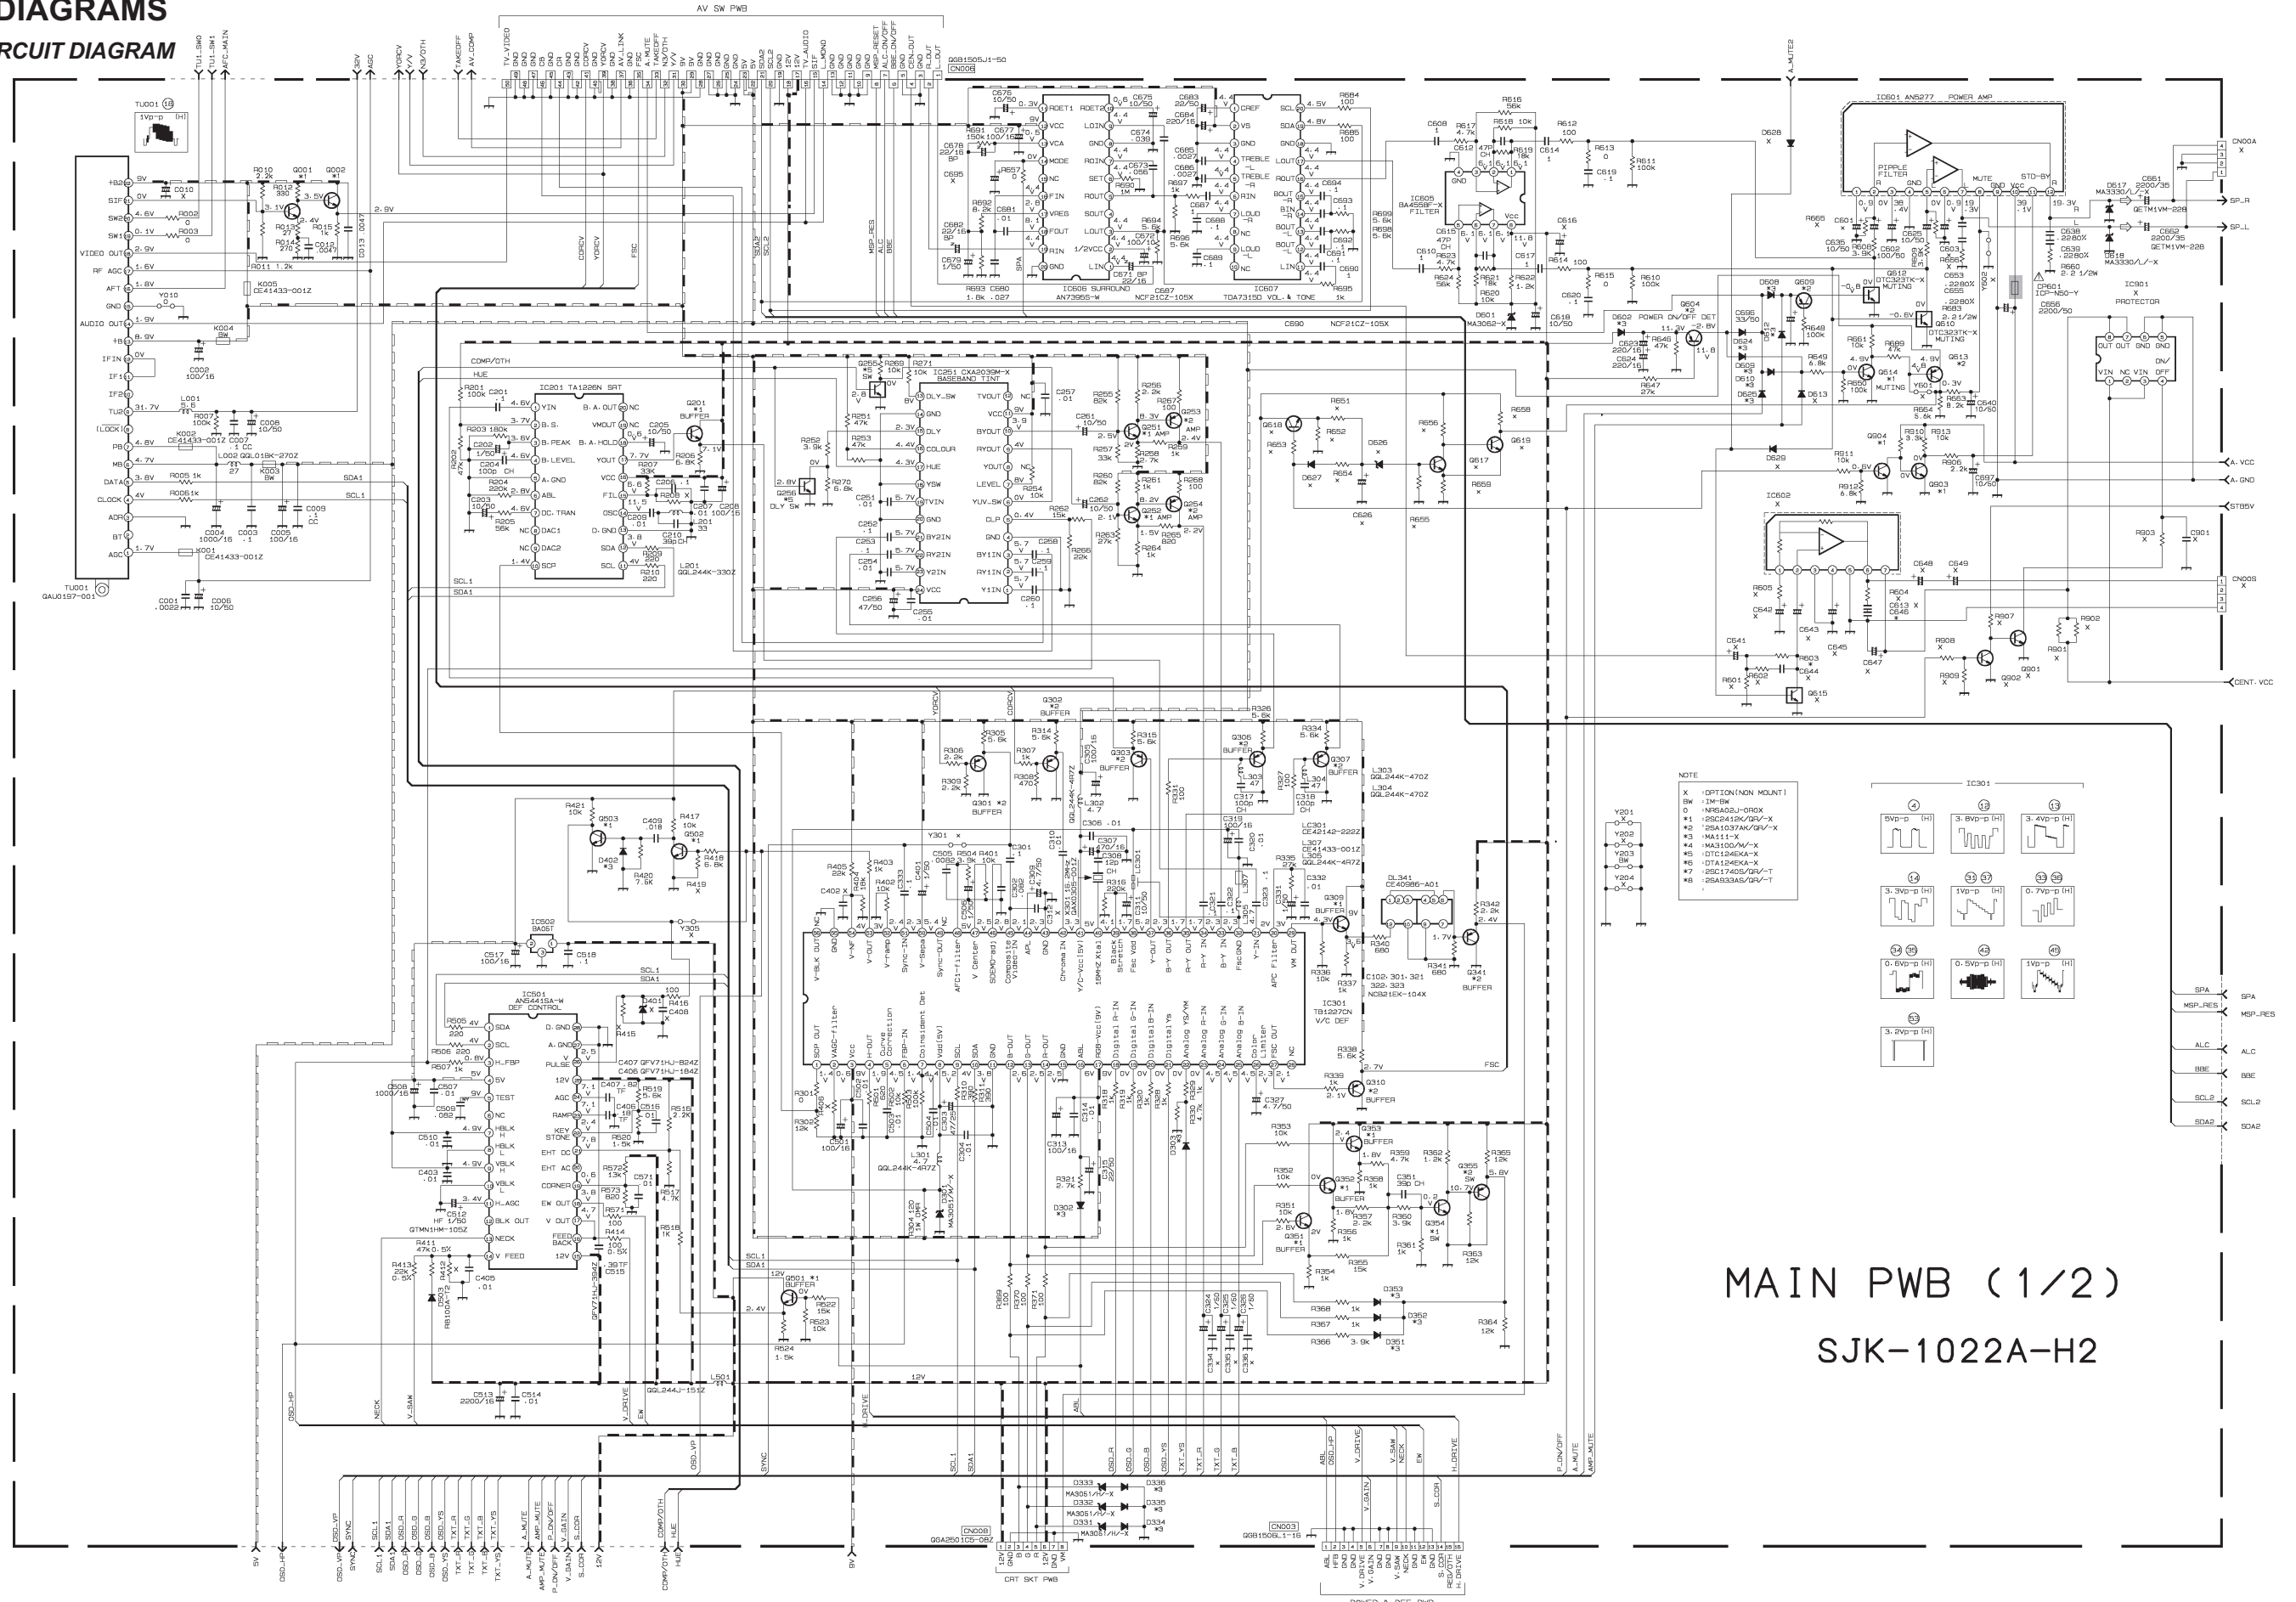

MAIN PWB (2/2)

SJK-1022A-H2

- NOTE
- X :OPTION(NON MOUNT)
 - BW :IM-BW
 - 0 :NFRAG09J-DROX
 - #1 :2SD2412K/QRV-X
 - #2 :2SA1037AK/QRV-X
 - #3 :MA111-X
 - #4 :MA3100A/V-X
 - #5 :DTC124EKA-X
 - #6 :DTA124EKA-X
 - #7 :2SD1740S/QRV-T
 - #8 :2SA933AS/QRV-T

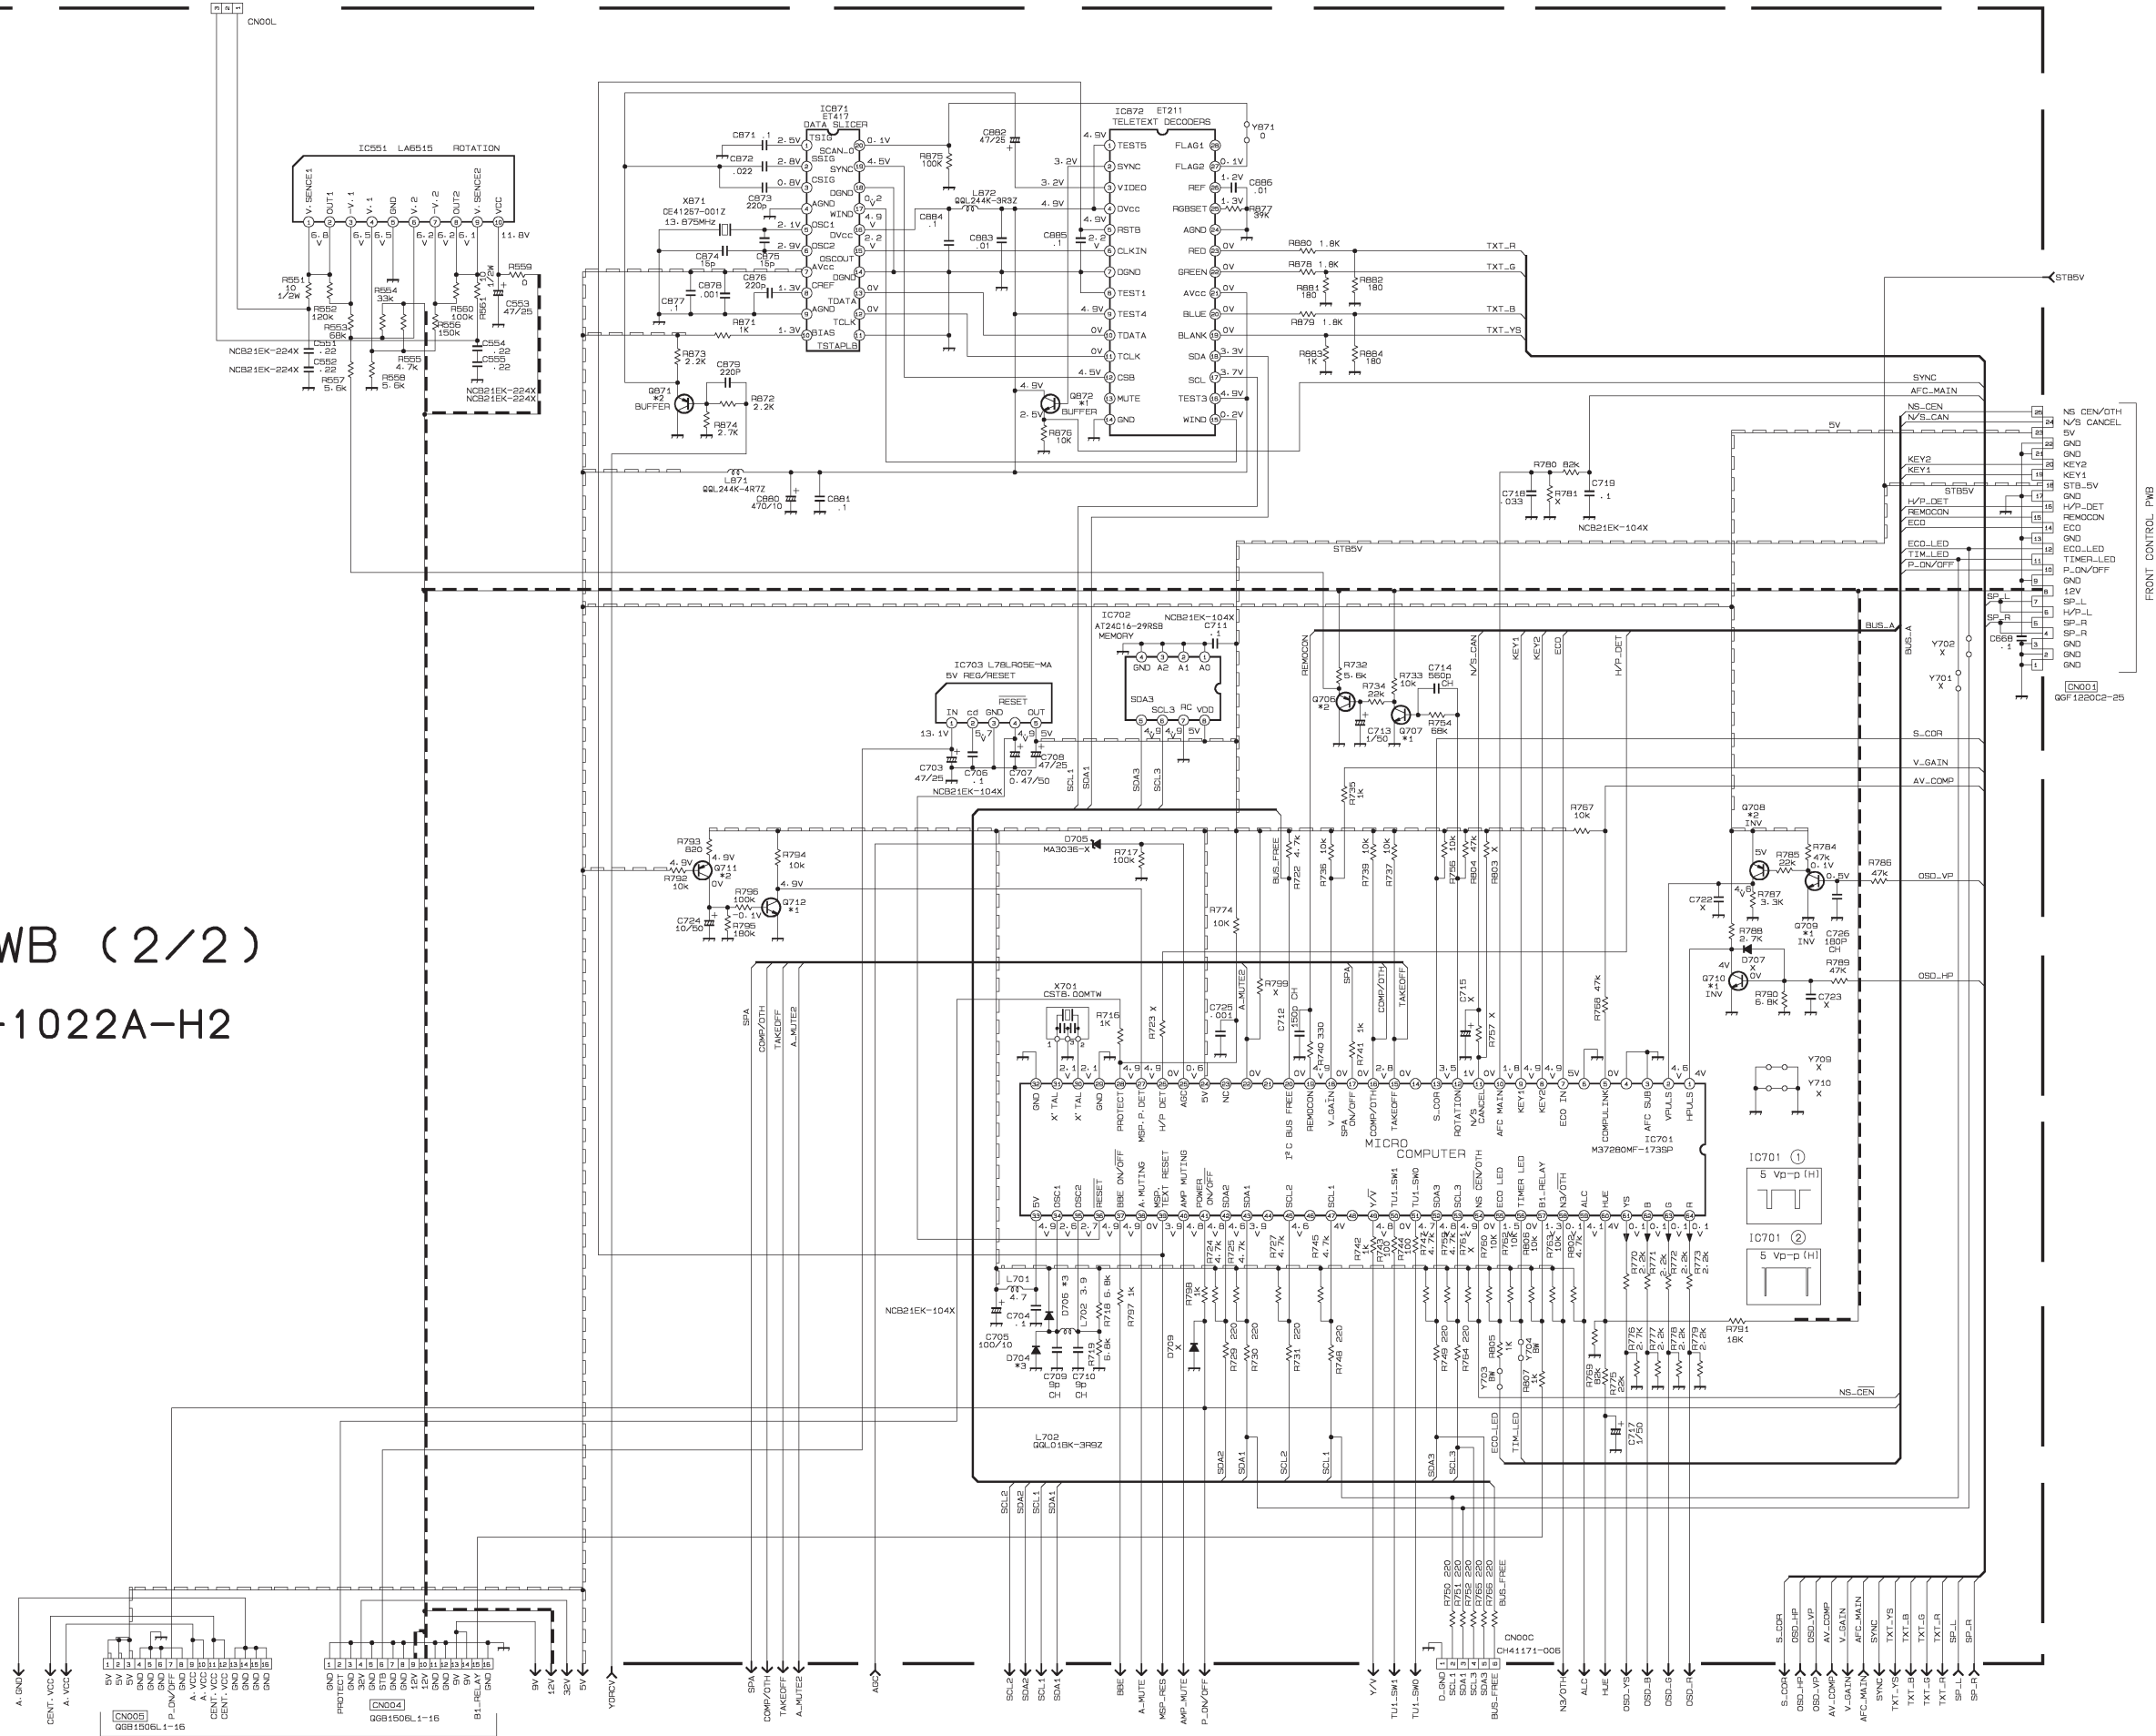


POWER & DEF PWB CIRCUIT DIAGRAM

NOTE


- *1: 2SC1740S/GP/-T
- *2: 2SA933AS/GP/-T
- *3: 1SS133-T2

BW: BUS WIRE
X: NON MOUNT (OPEN)

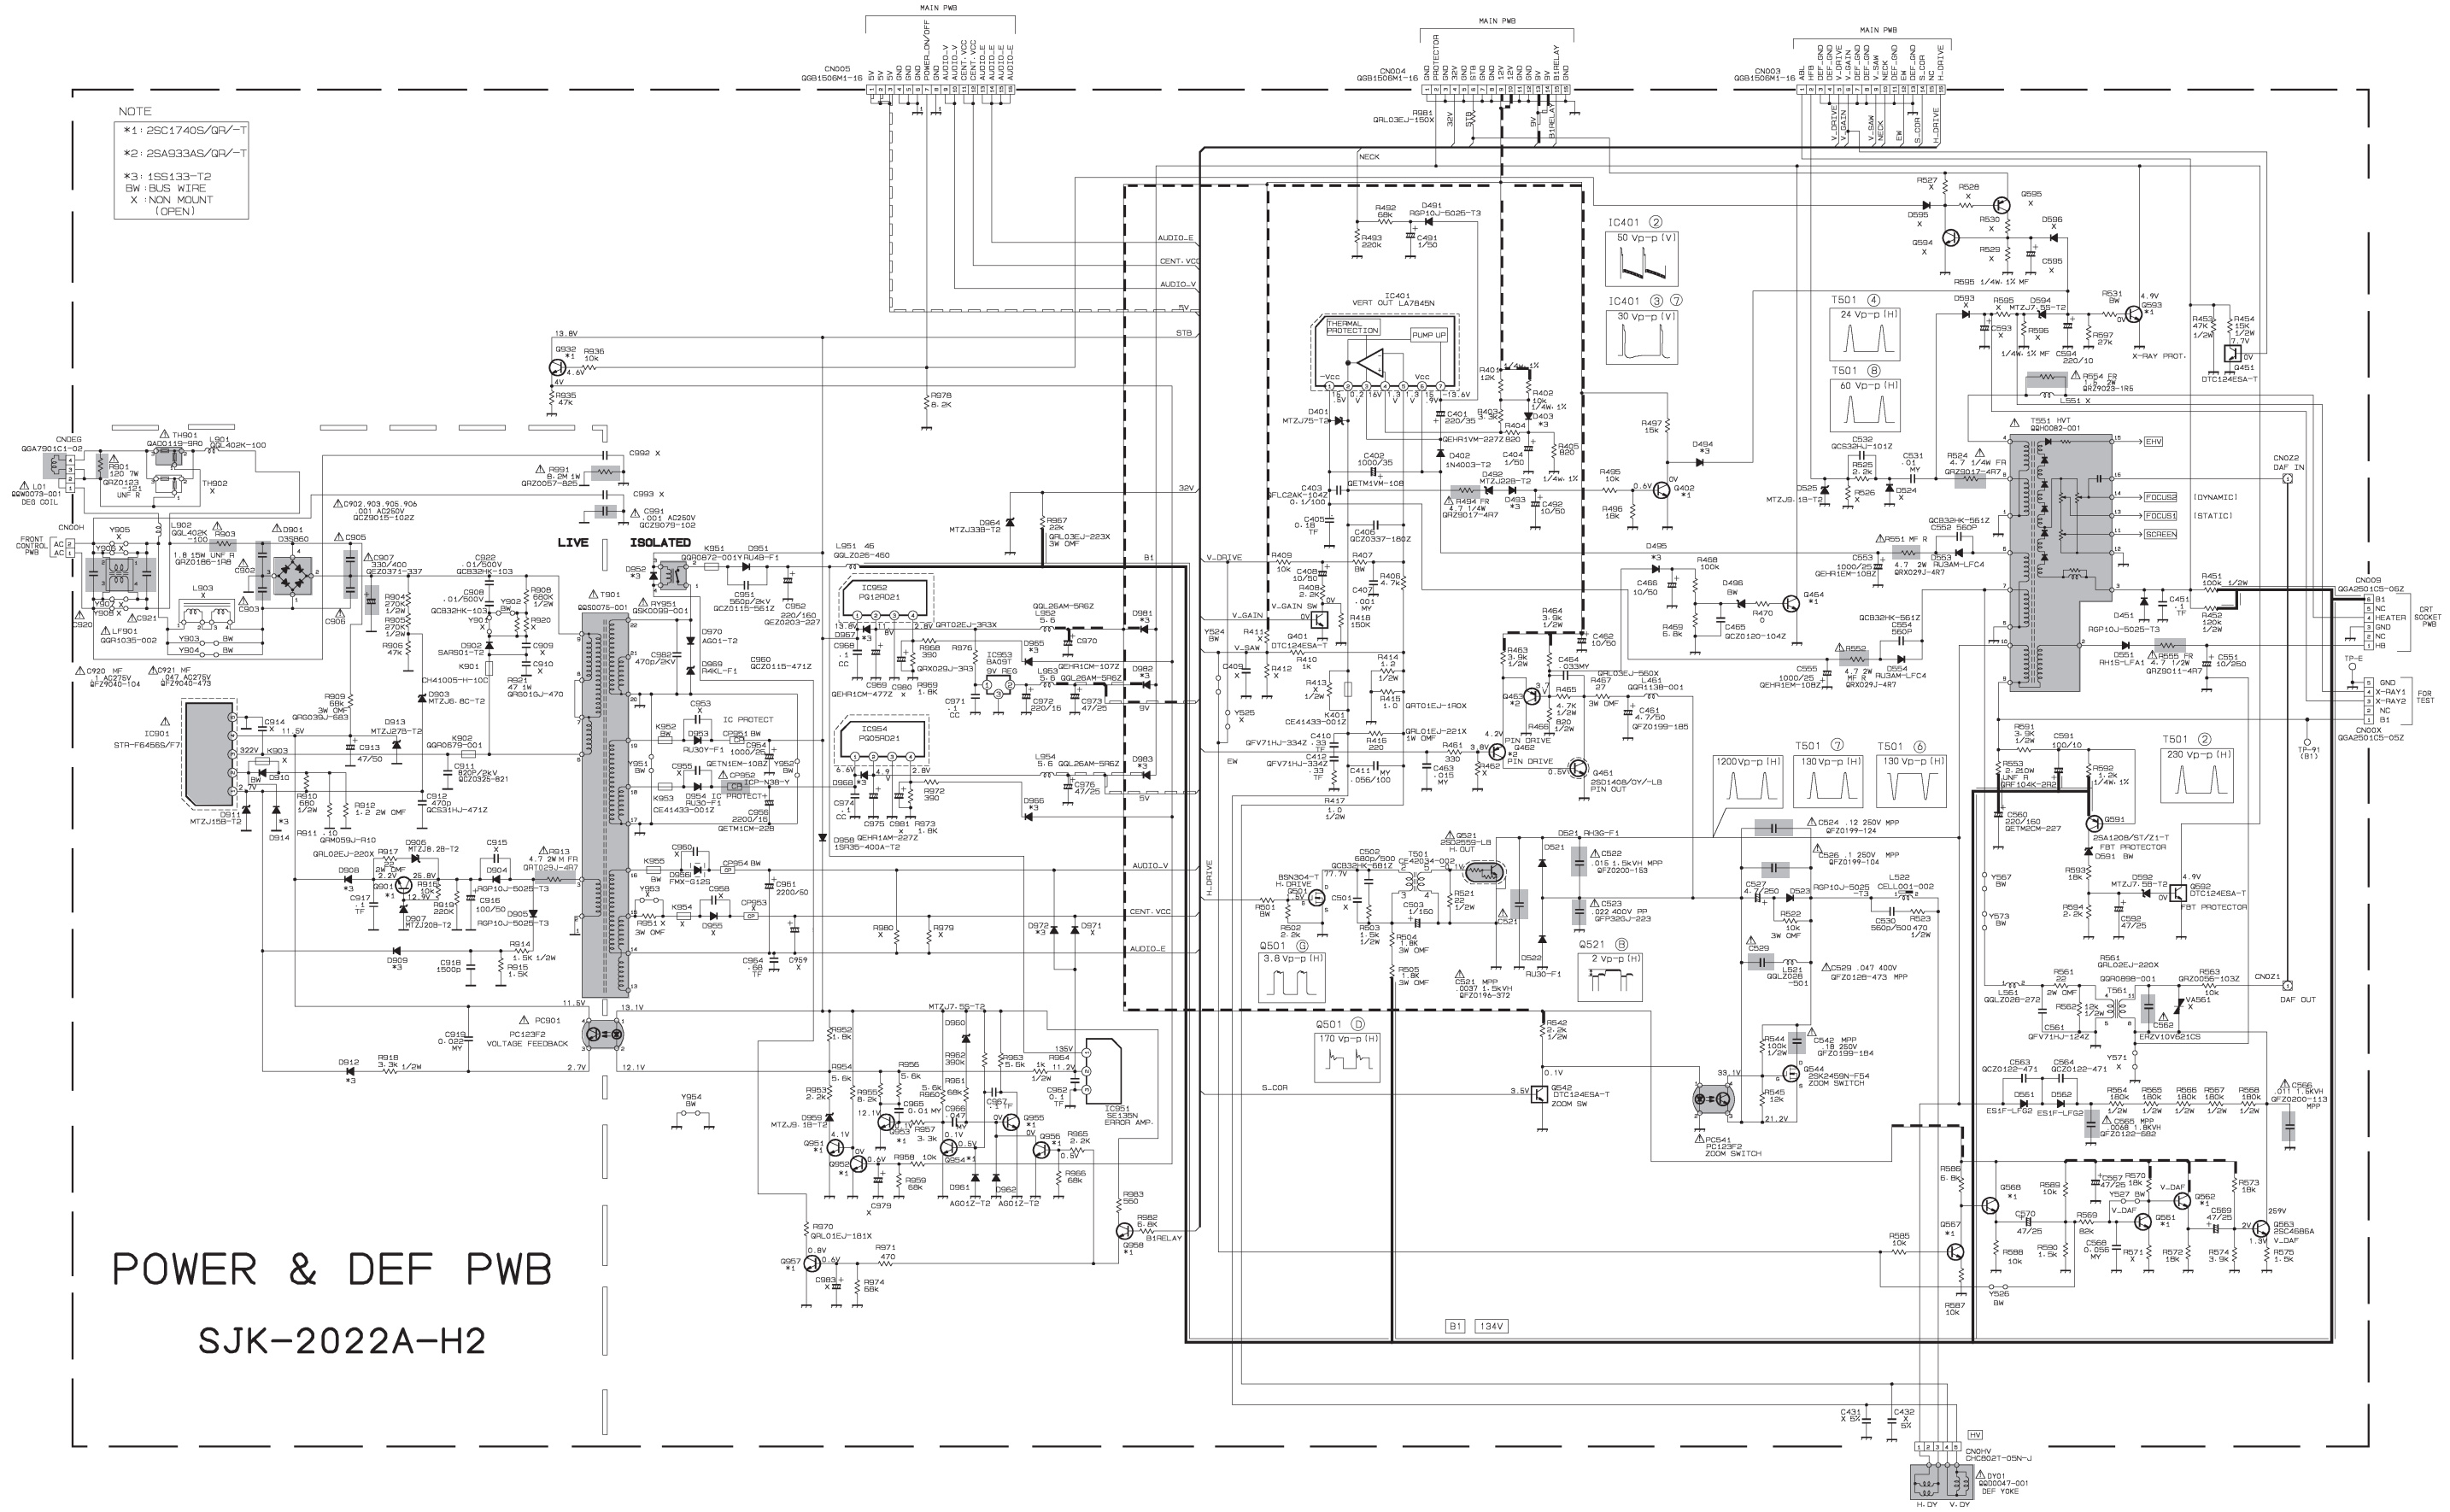

POWER & DEF PWB
SJK-2022A-H2


CRT SOCKET PWB CIRCUIT DIAGRAM

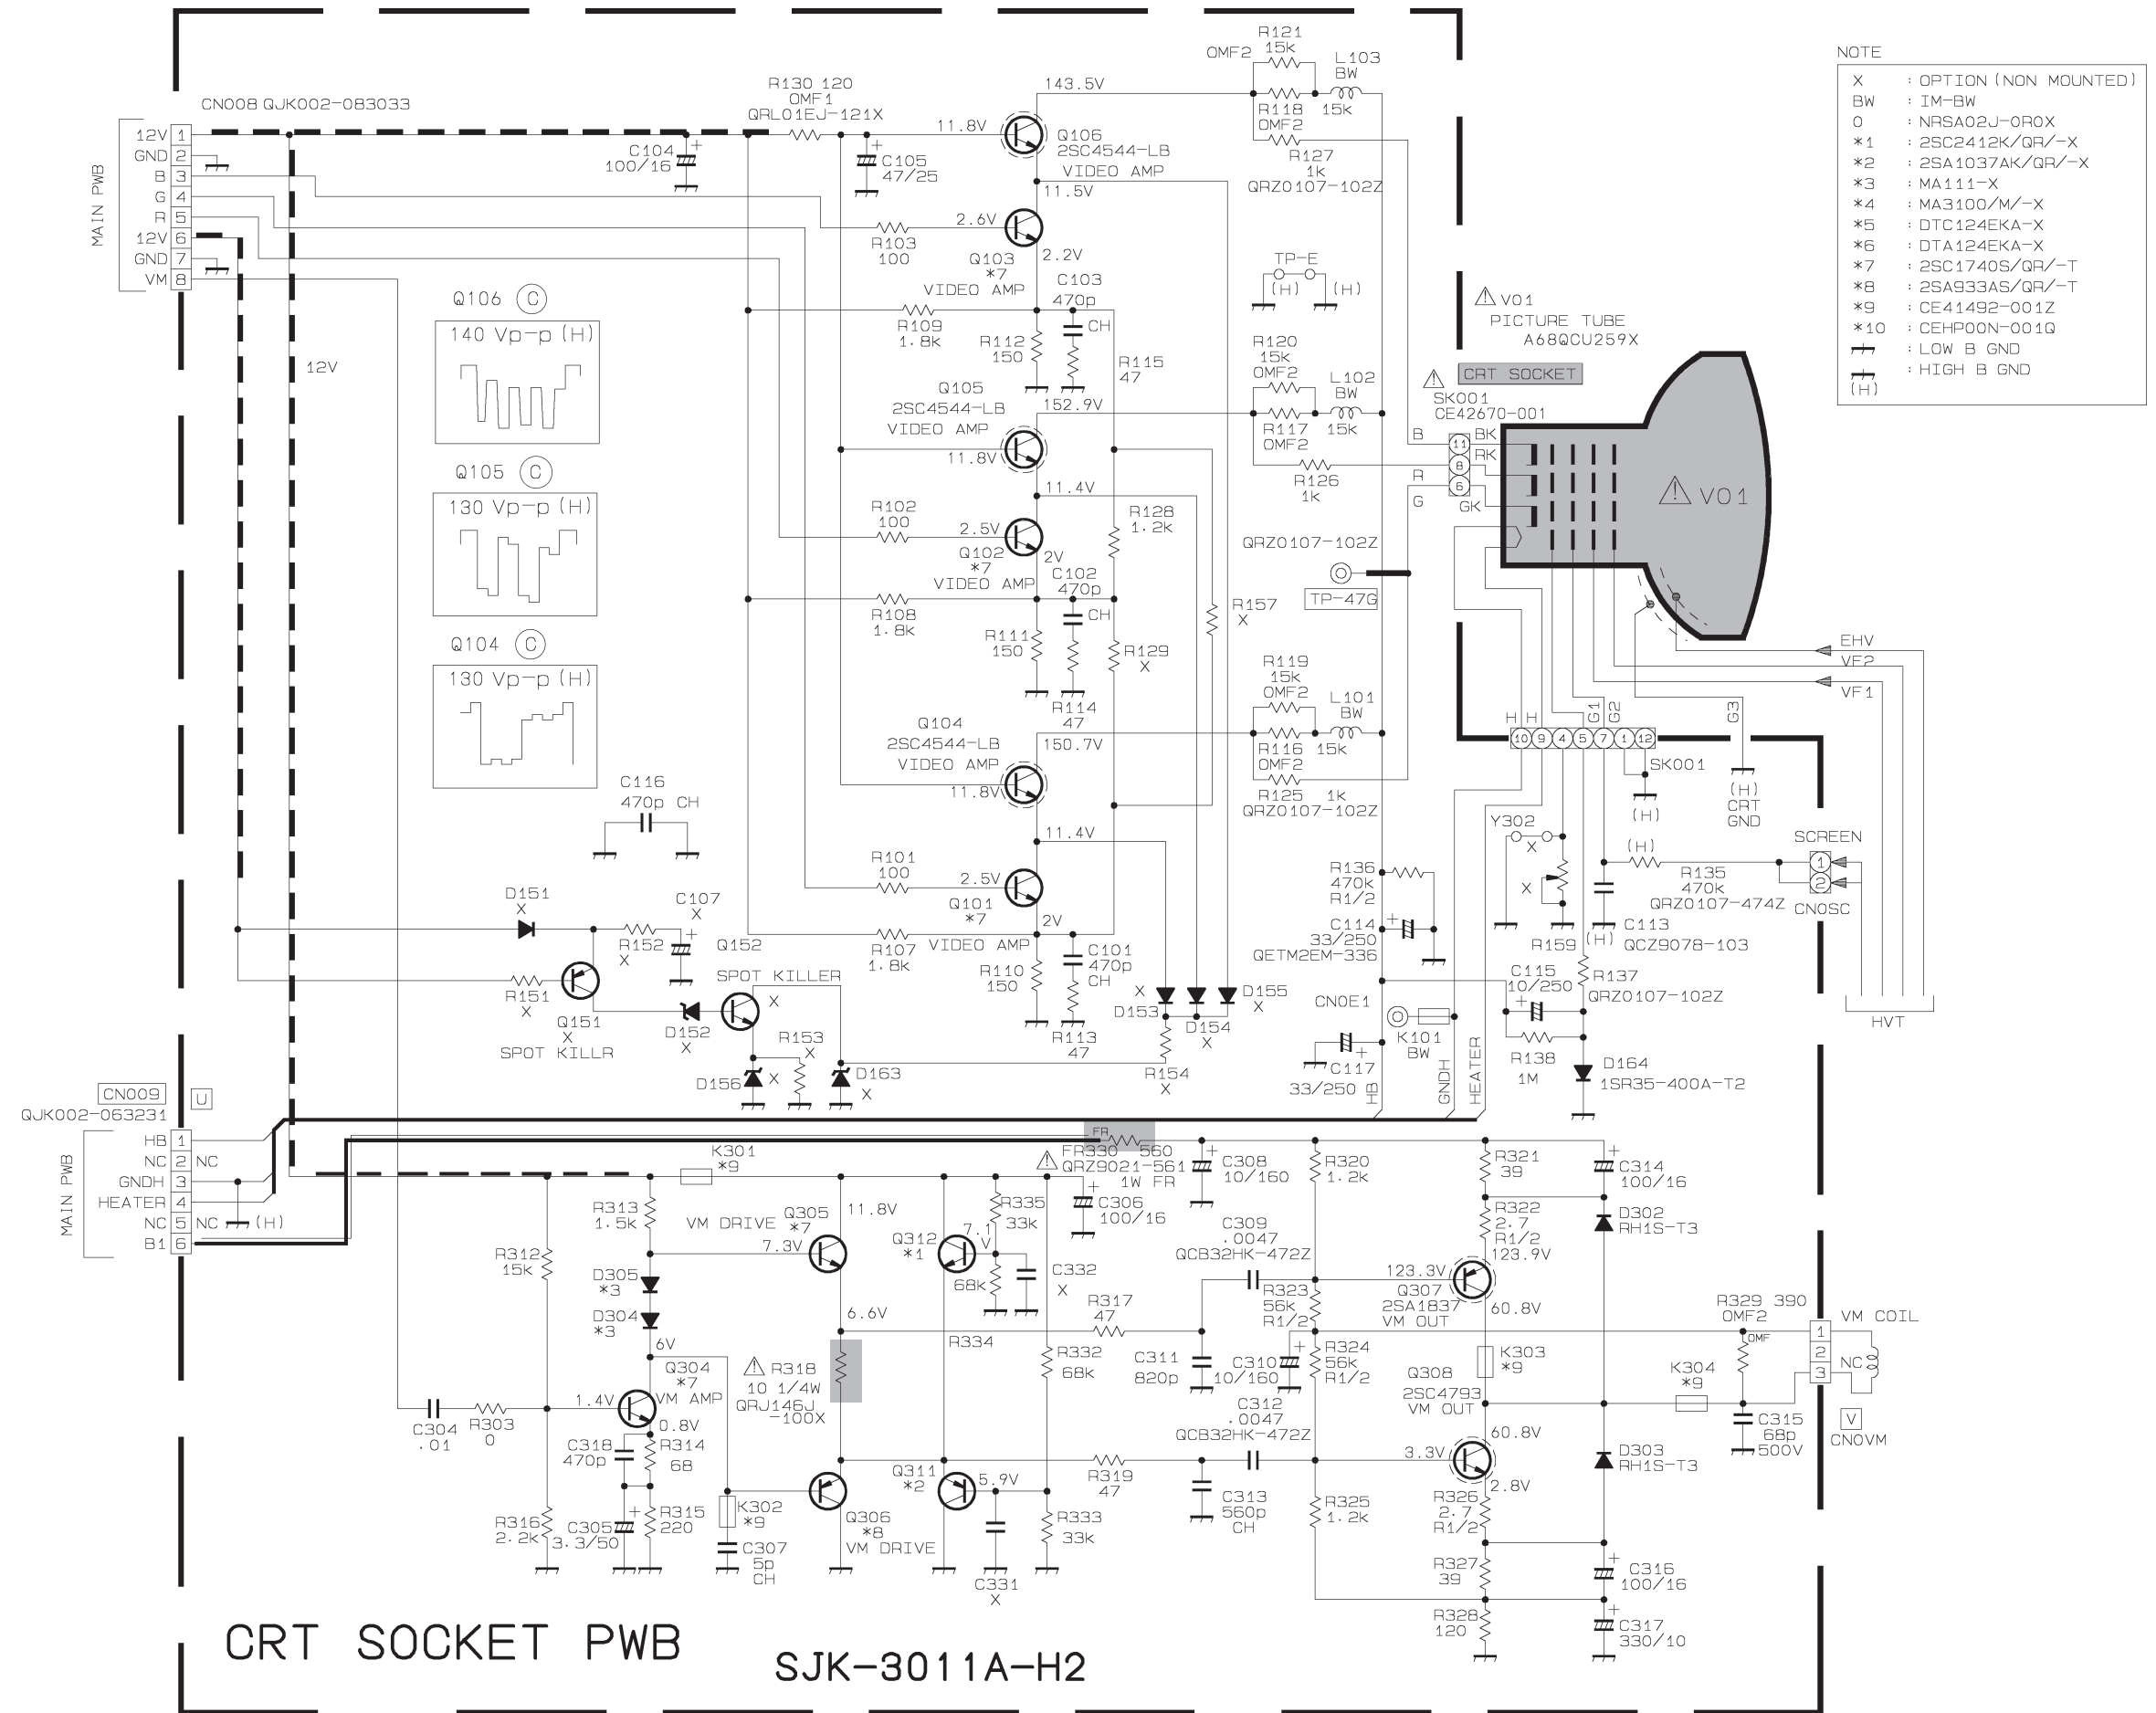

- NOTE
- X : OPTION (NON MOUNTED)
 - BW : IM-BW
 - 0 : NRSA02J-OR0X
 - *1 : 2SC2412K/QR/-X
 - *2 : 2SA1037AK/QR/-X
 - *3 : MA111-X
 - *4 : MA3100/M/-X
 - *5 : DTC124EKA-X
 - *6 : DTA124EKA-X
 - *7 : 2SC1740S/QR/-T
 - *8 : 2SA933AS/QR/-T
 - *9 : CE41492-001Z
 - *10 : CEHP00N-001Q
 - ⊥ : LOW B GND
 - (H) : HIGH B GND

CRT SOCKET PWB
SJK-3011A-H2


FRONT CONTROL PWB CIRCUIT DIAGRAM

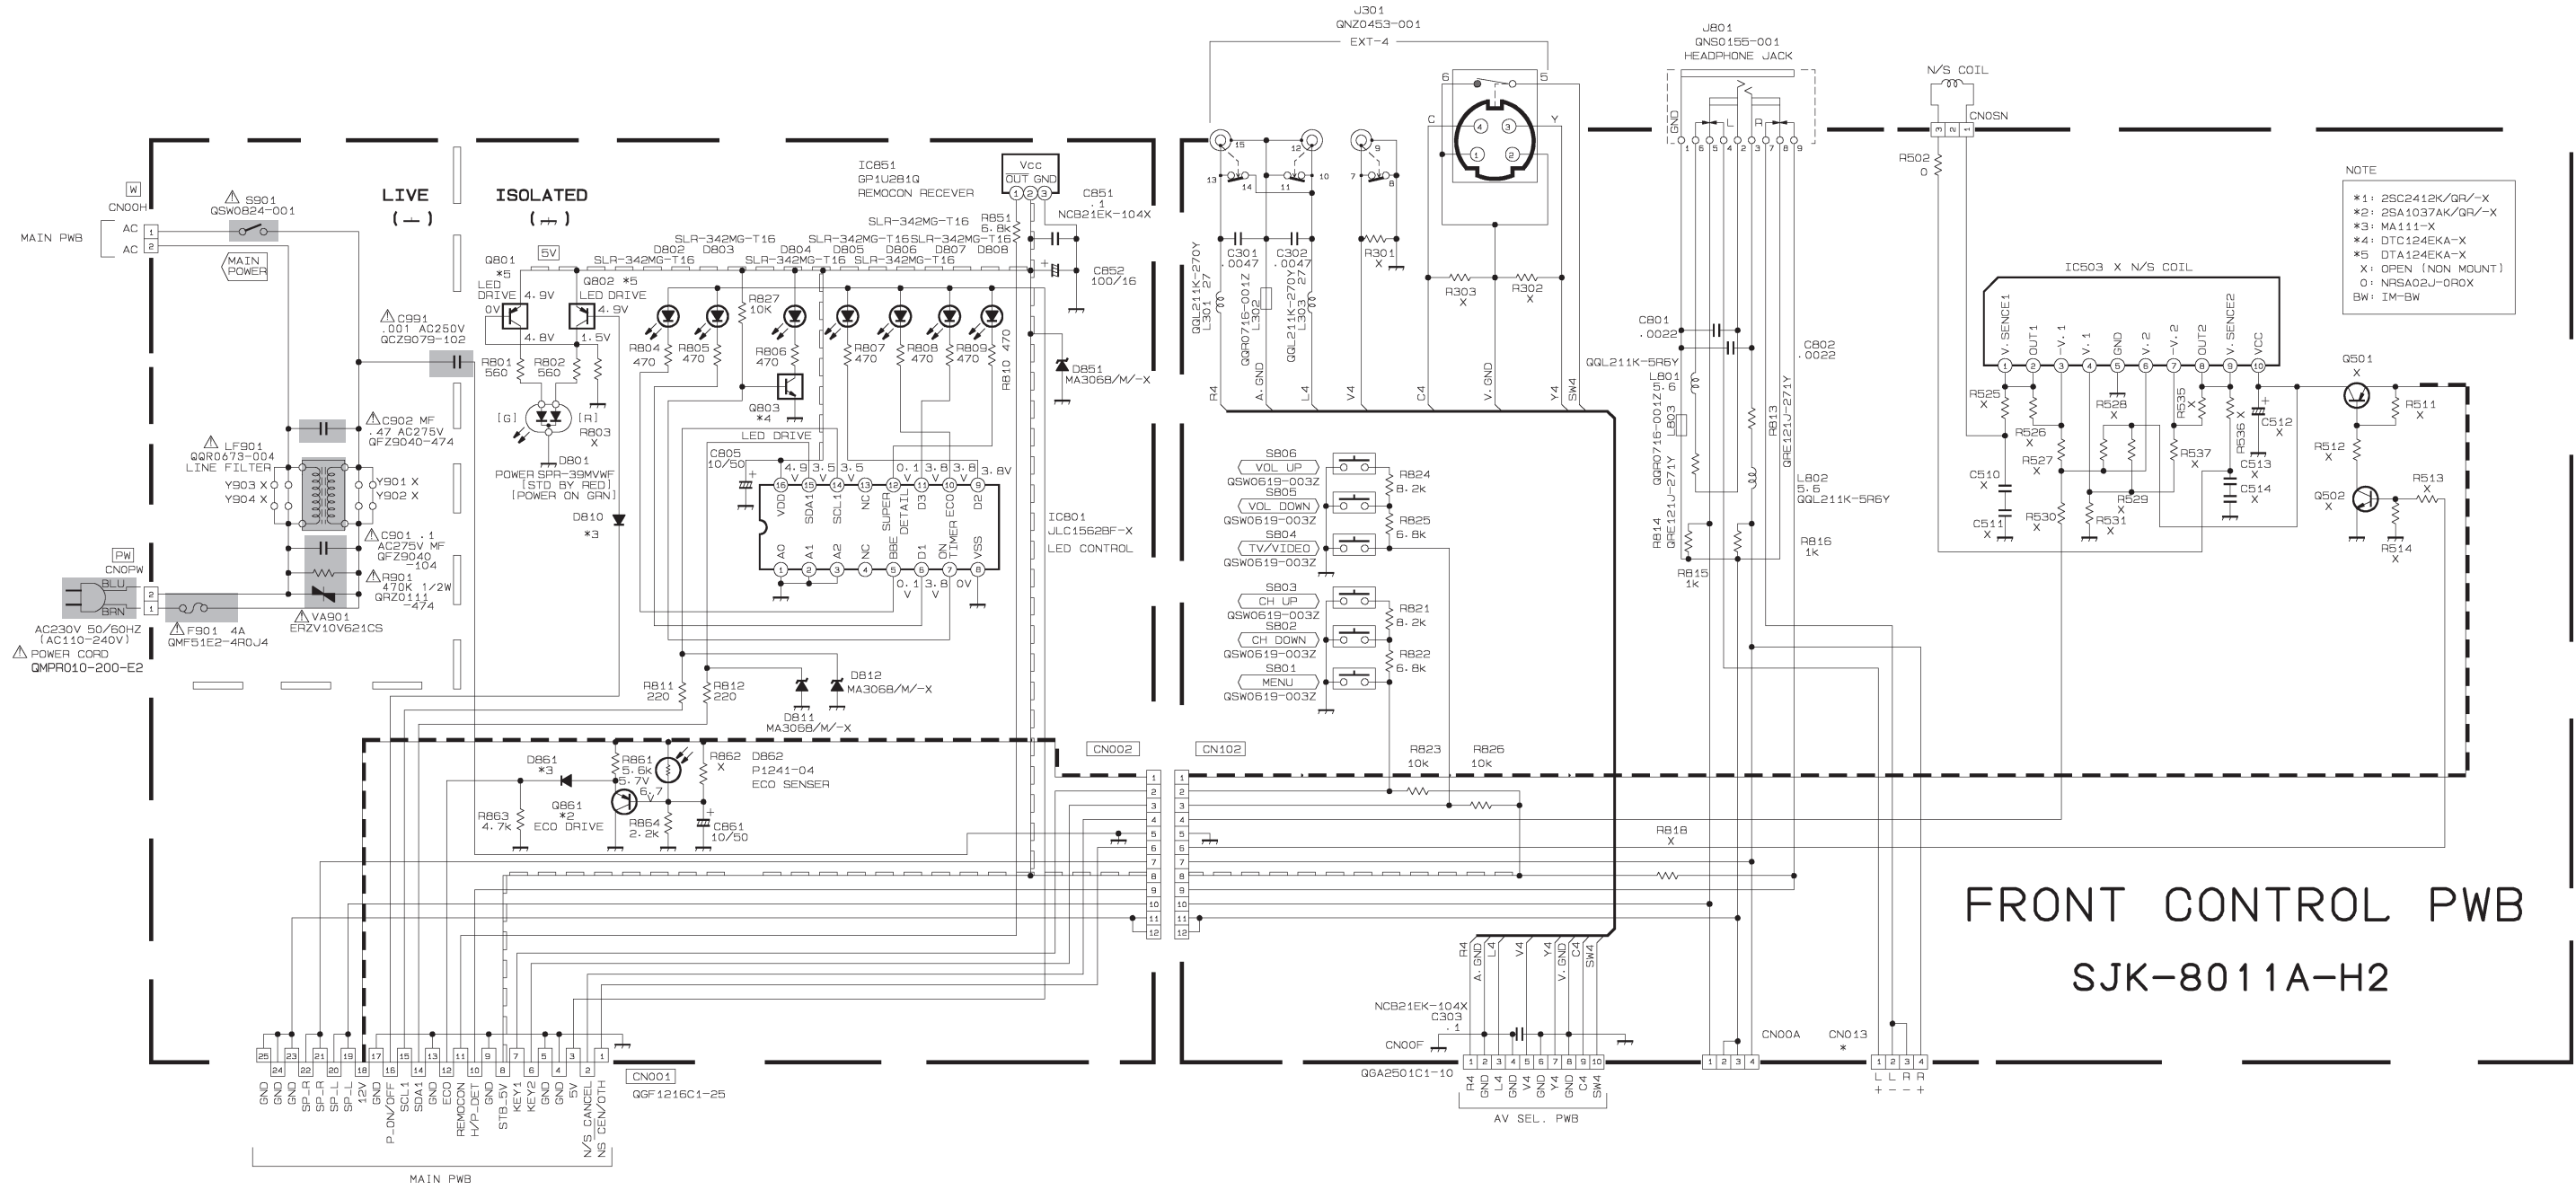

FRONT CONTROL PWB
SJK-8011A-H2

AV SEL. PWB CIRCUIT DIAGRAM

AV SEL. PWB
SJK0S003A-H2

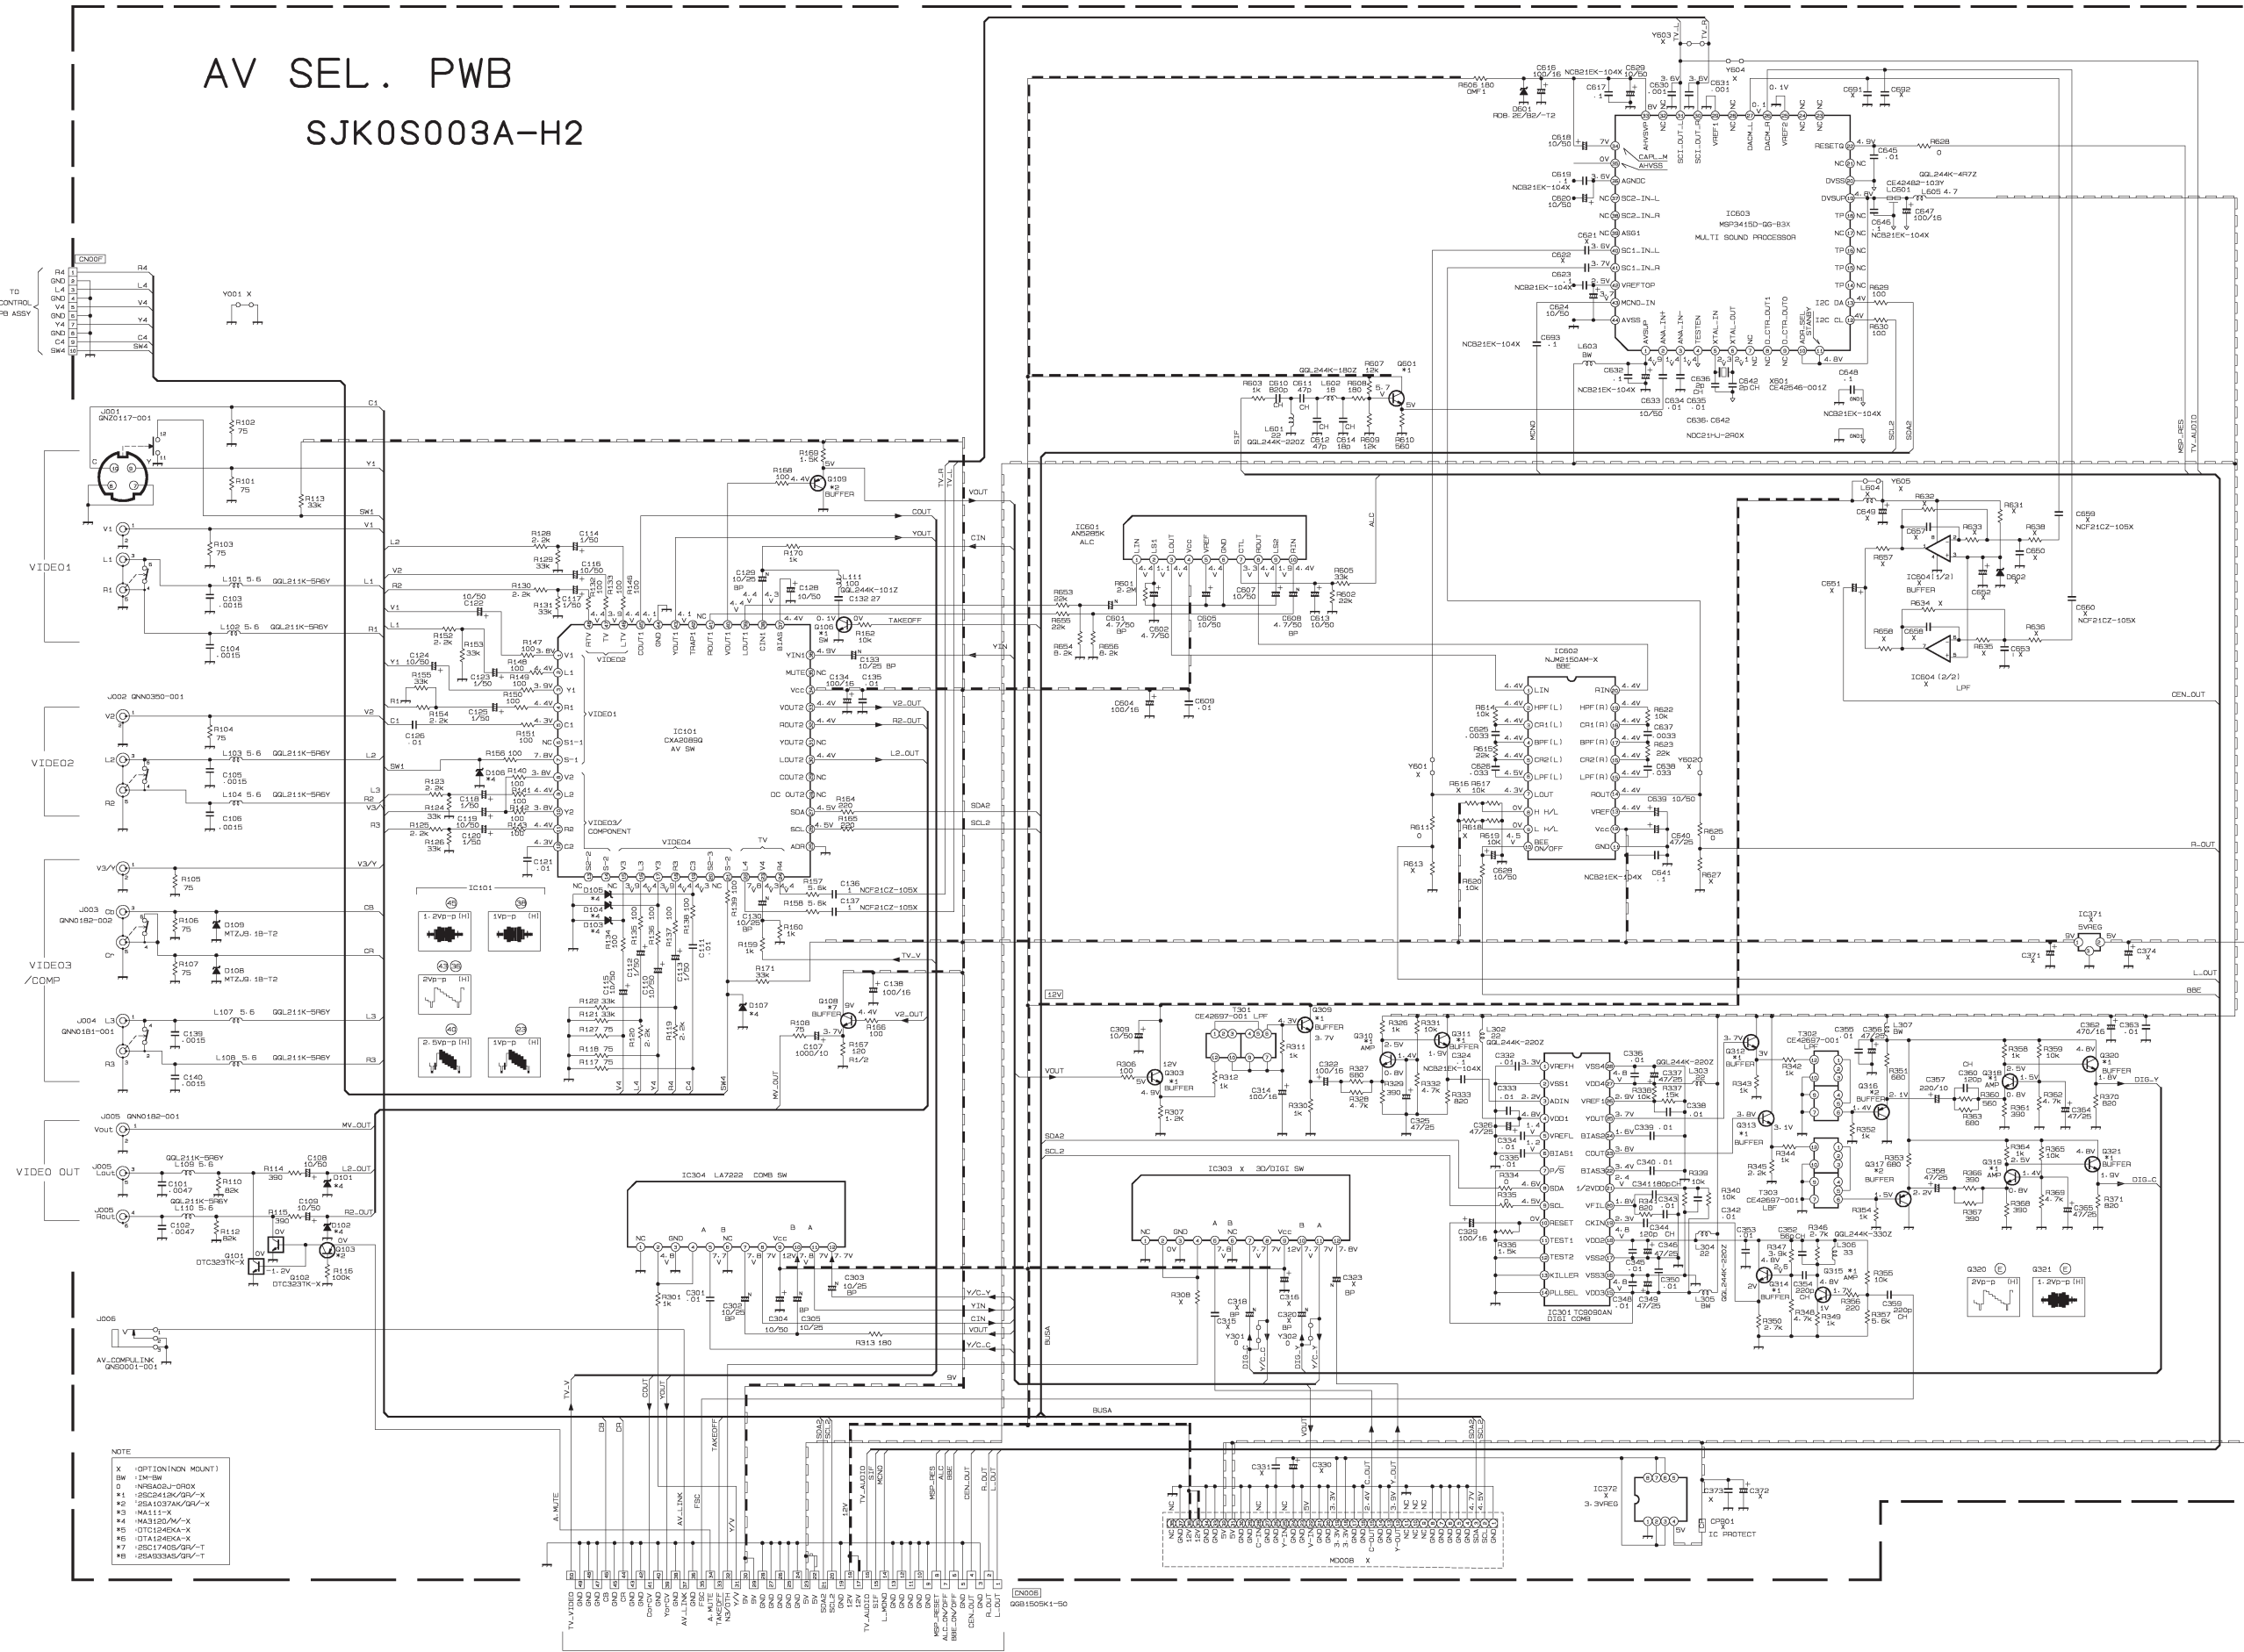


NOTE

- X (OPTIONAL MOUNT)
- BW 12M-BW
- D 1N4001-PROX
- #1 18SC2419K/GRV-X
- #2 18SA1037AK/GRV-X
- #3 MA111-X
- #4 MA3120-VV-X
- #5 07C1248KA-X
- #6 07A1248KA-X
- #7 18SC174DS/GRV-T
- #8 18SA333AS/GRV-T

PATTERN DIAGRAMS


MAIN PWB PATTERN

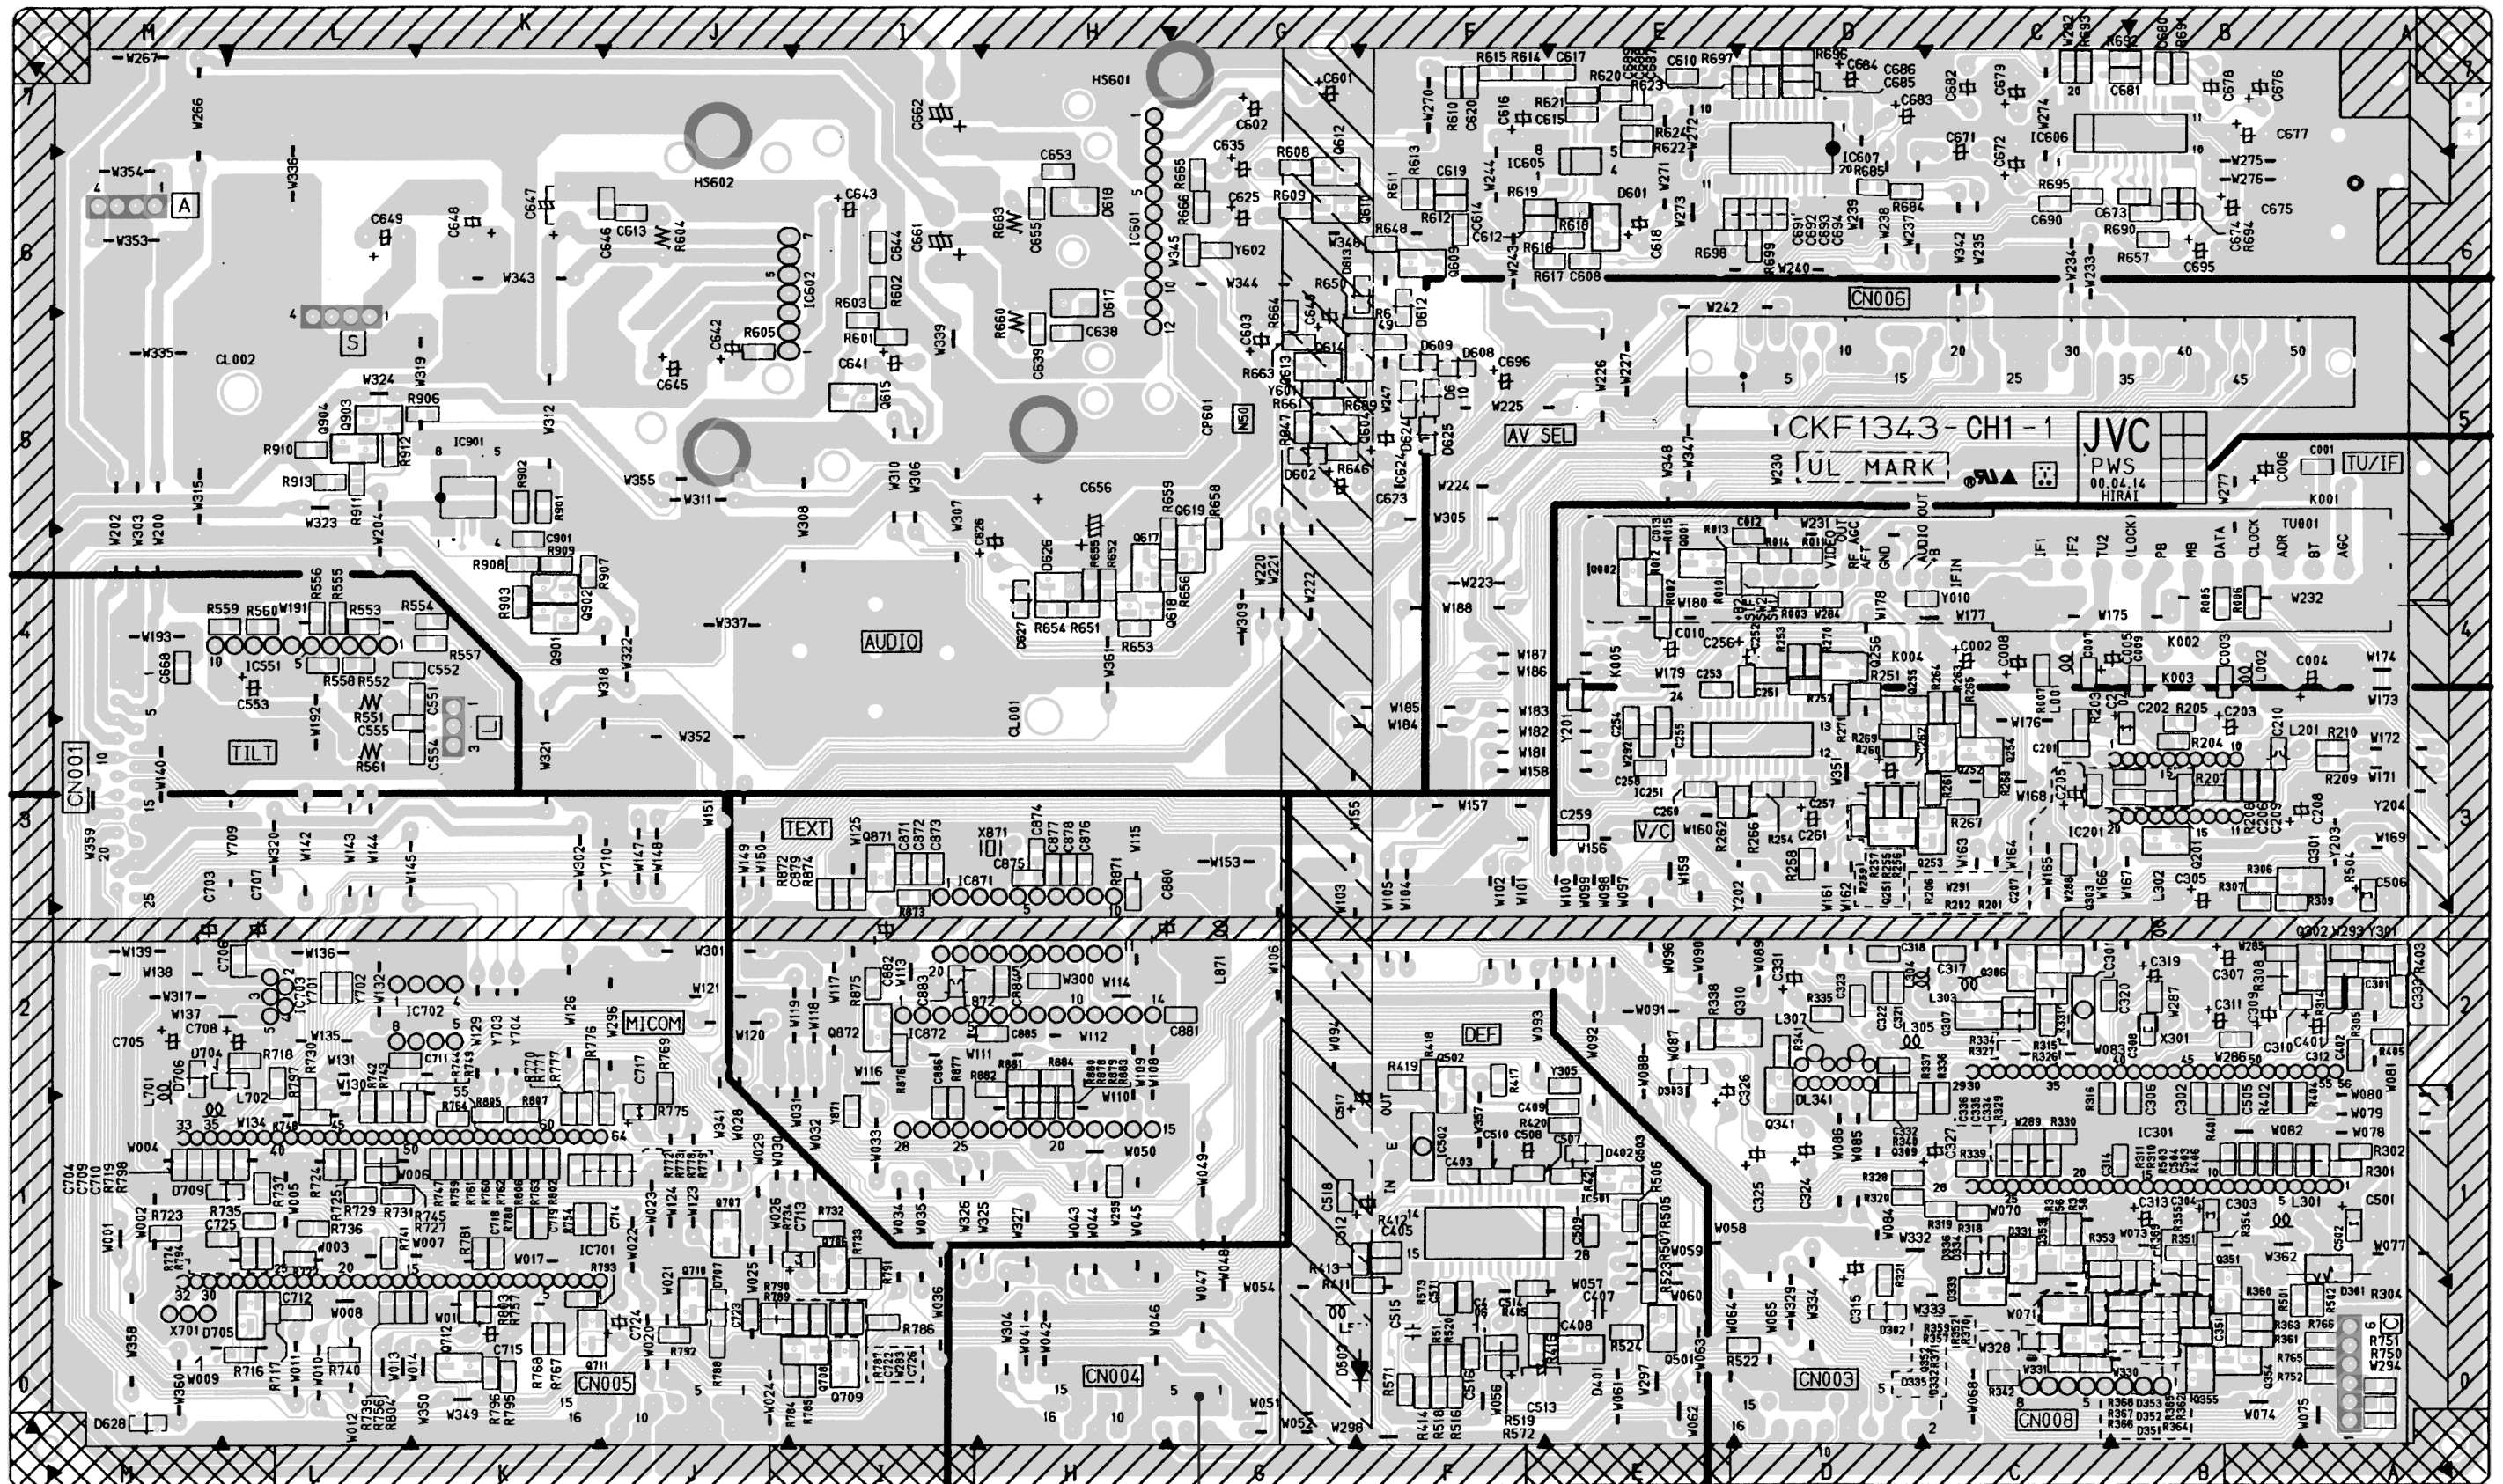


(77)

POWER & DEF PWB PATTERN


FRONT

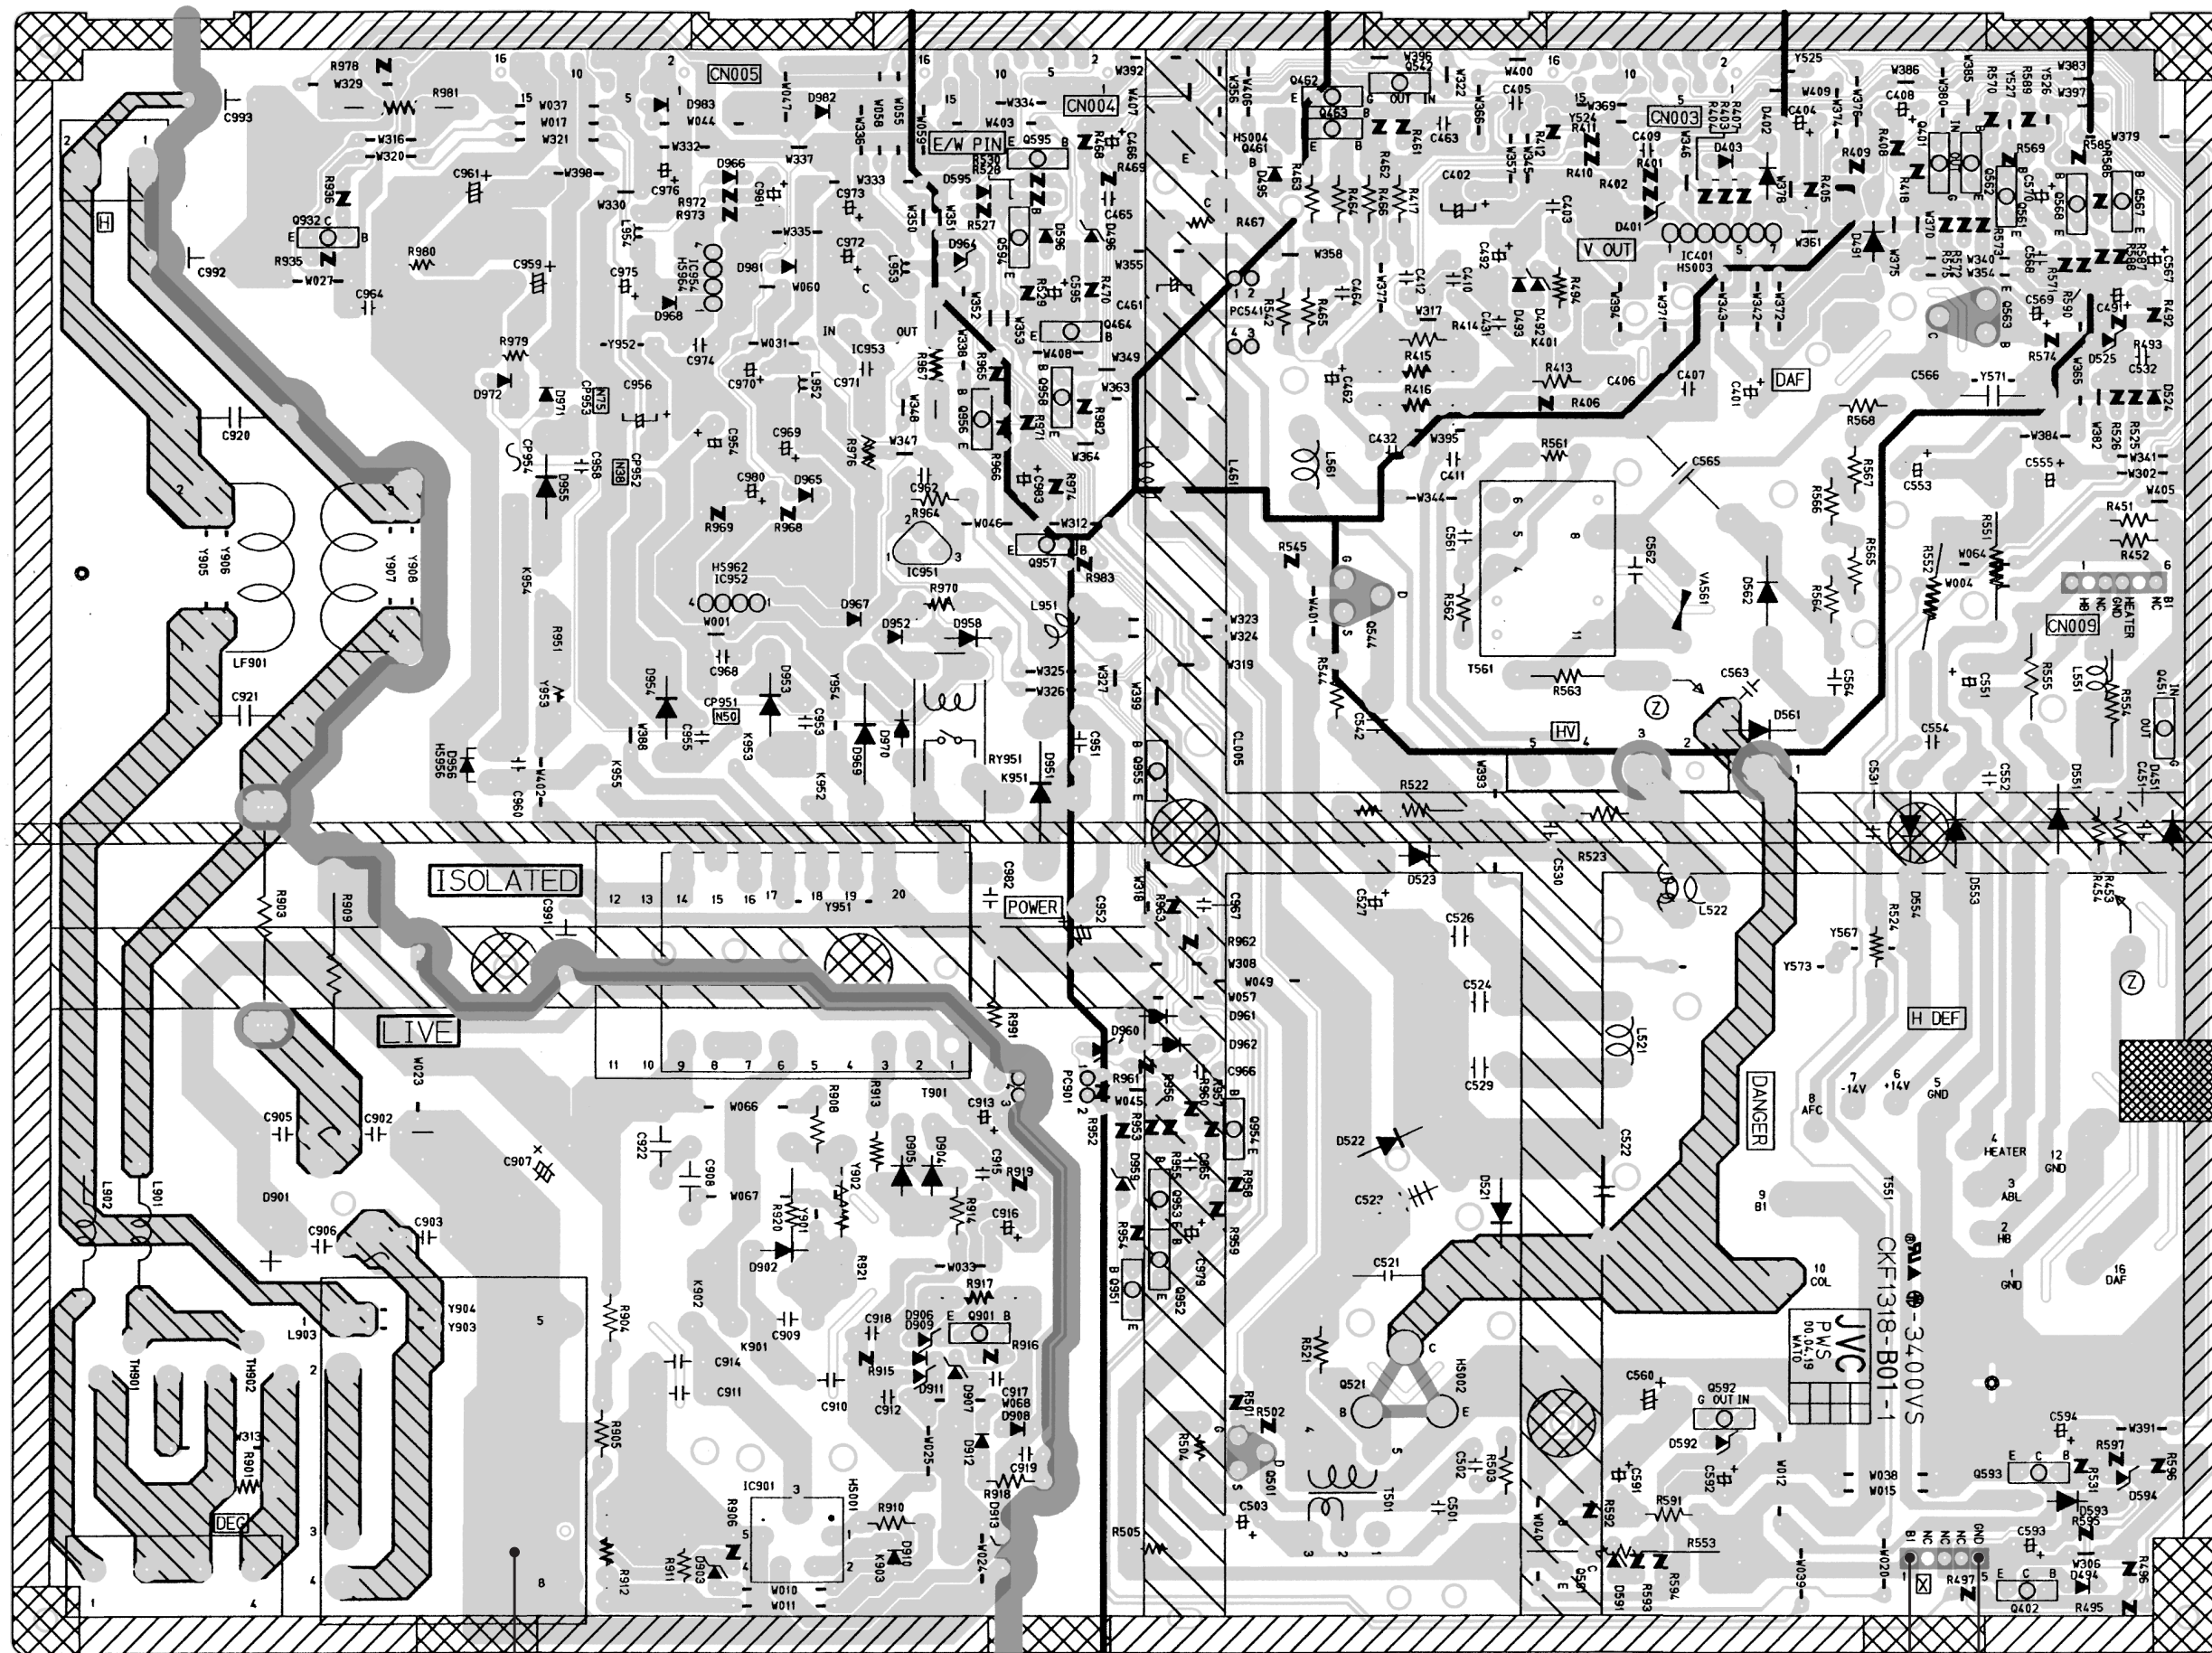


CRT SOCKET PWB PATTERN

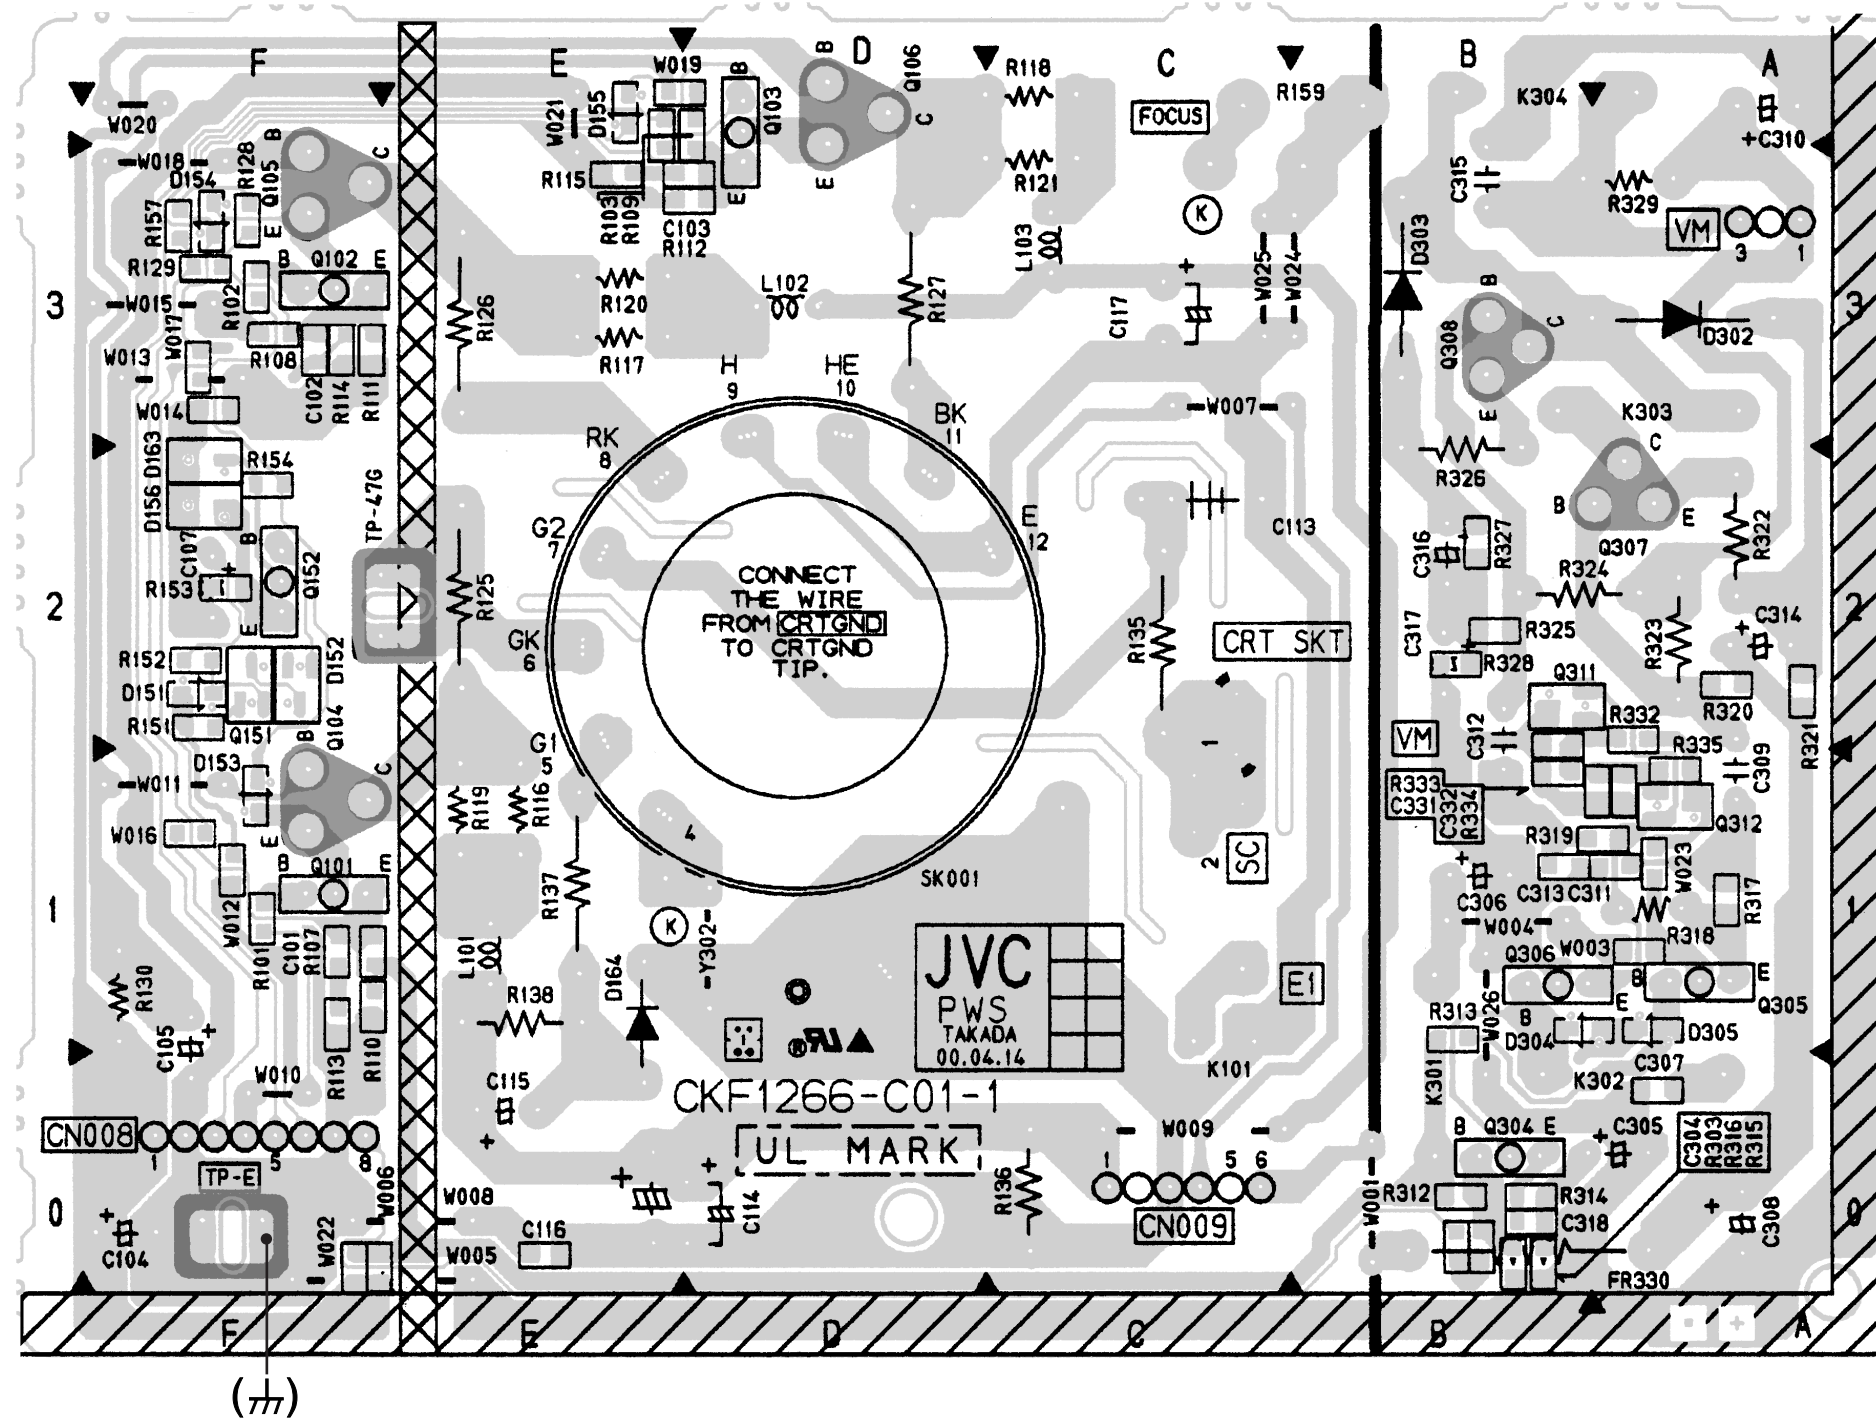

FRONT CONTROL PWB PATTERN

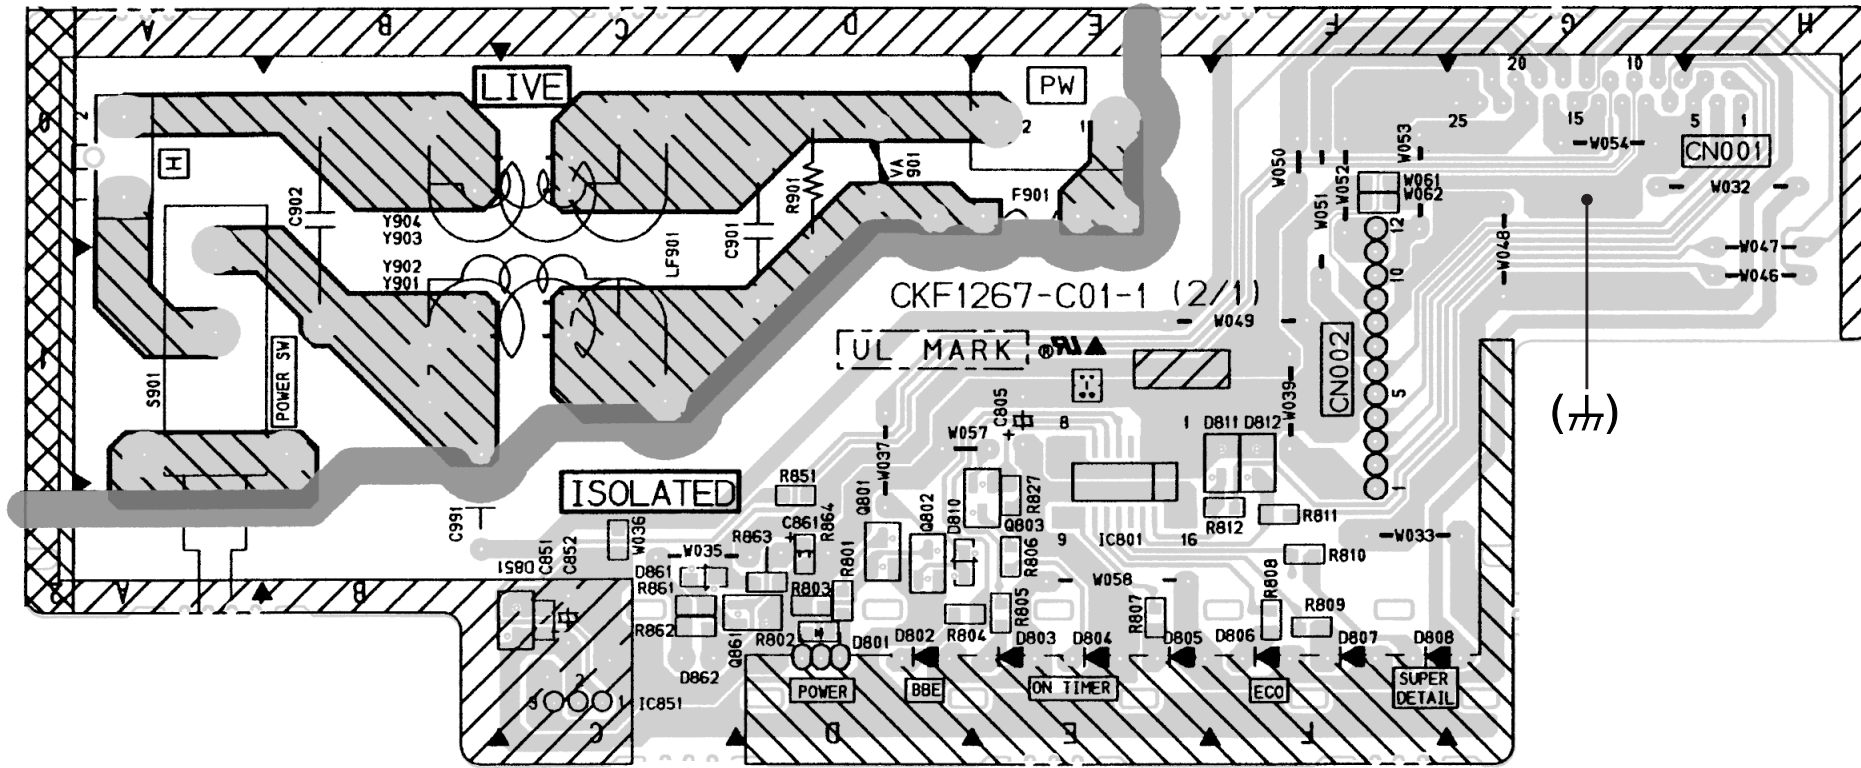


FRONT

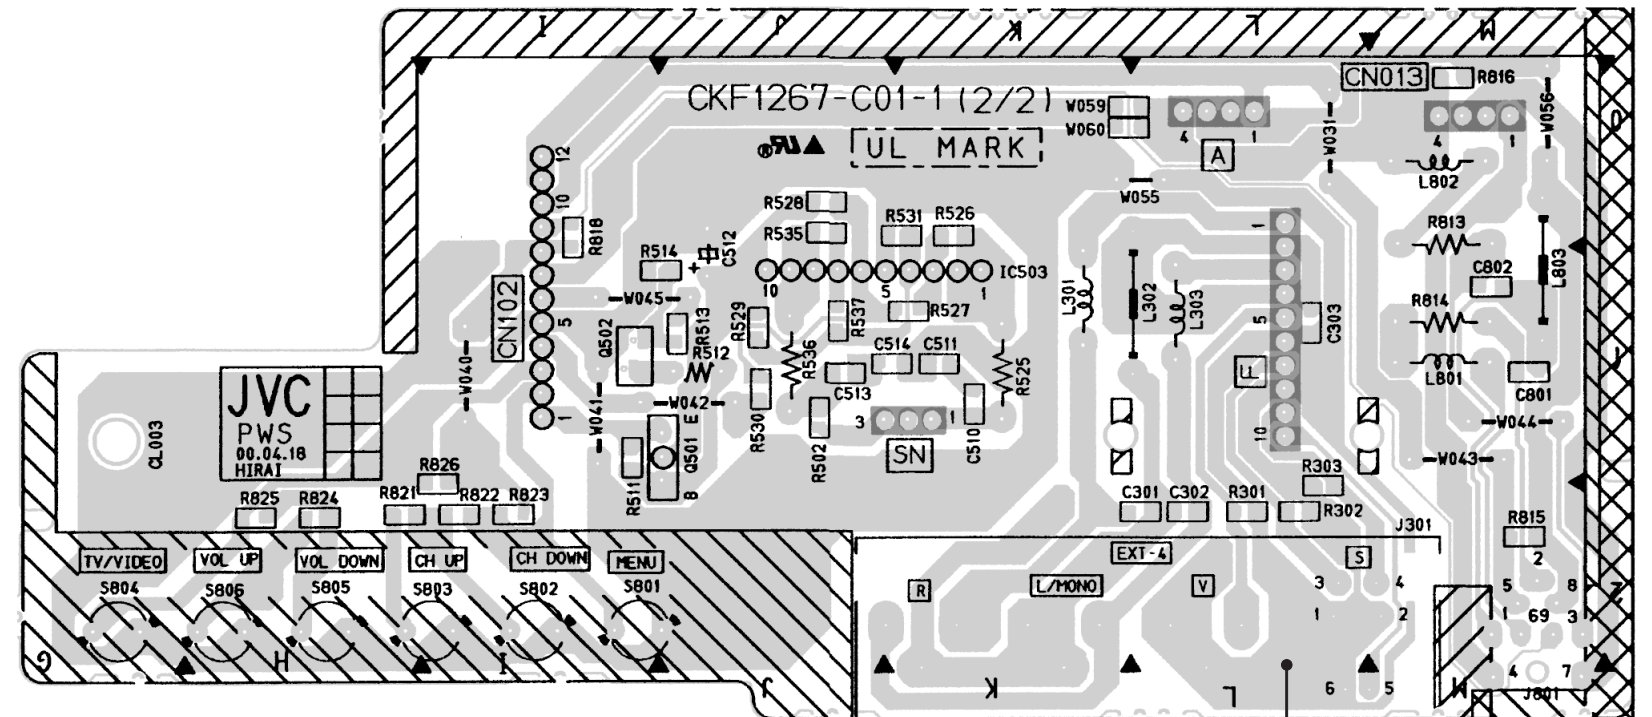

FRONT

AV SEL. PWB PATTERN

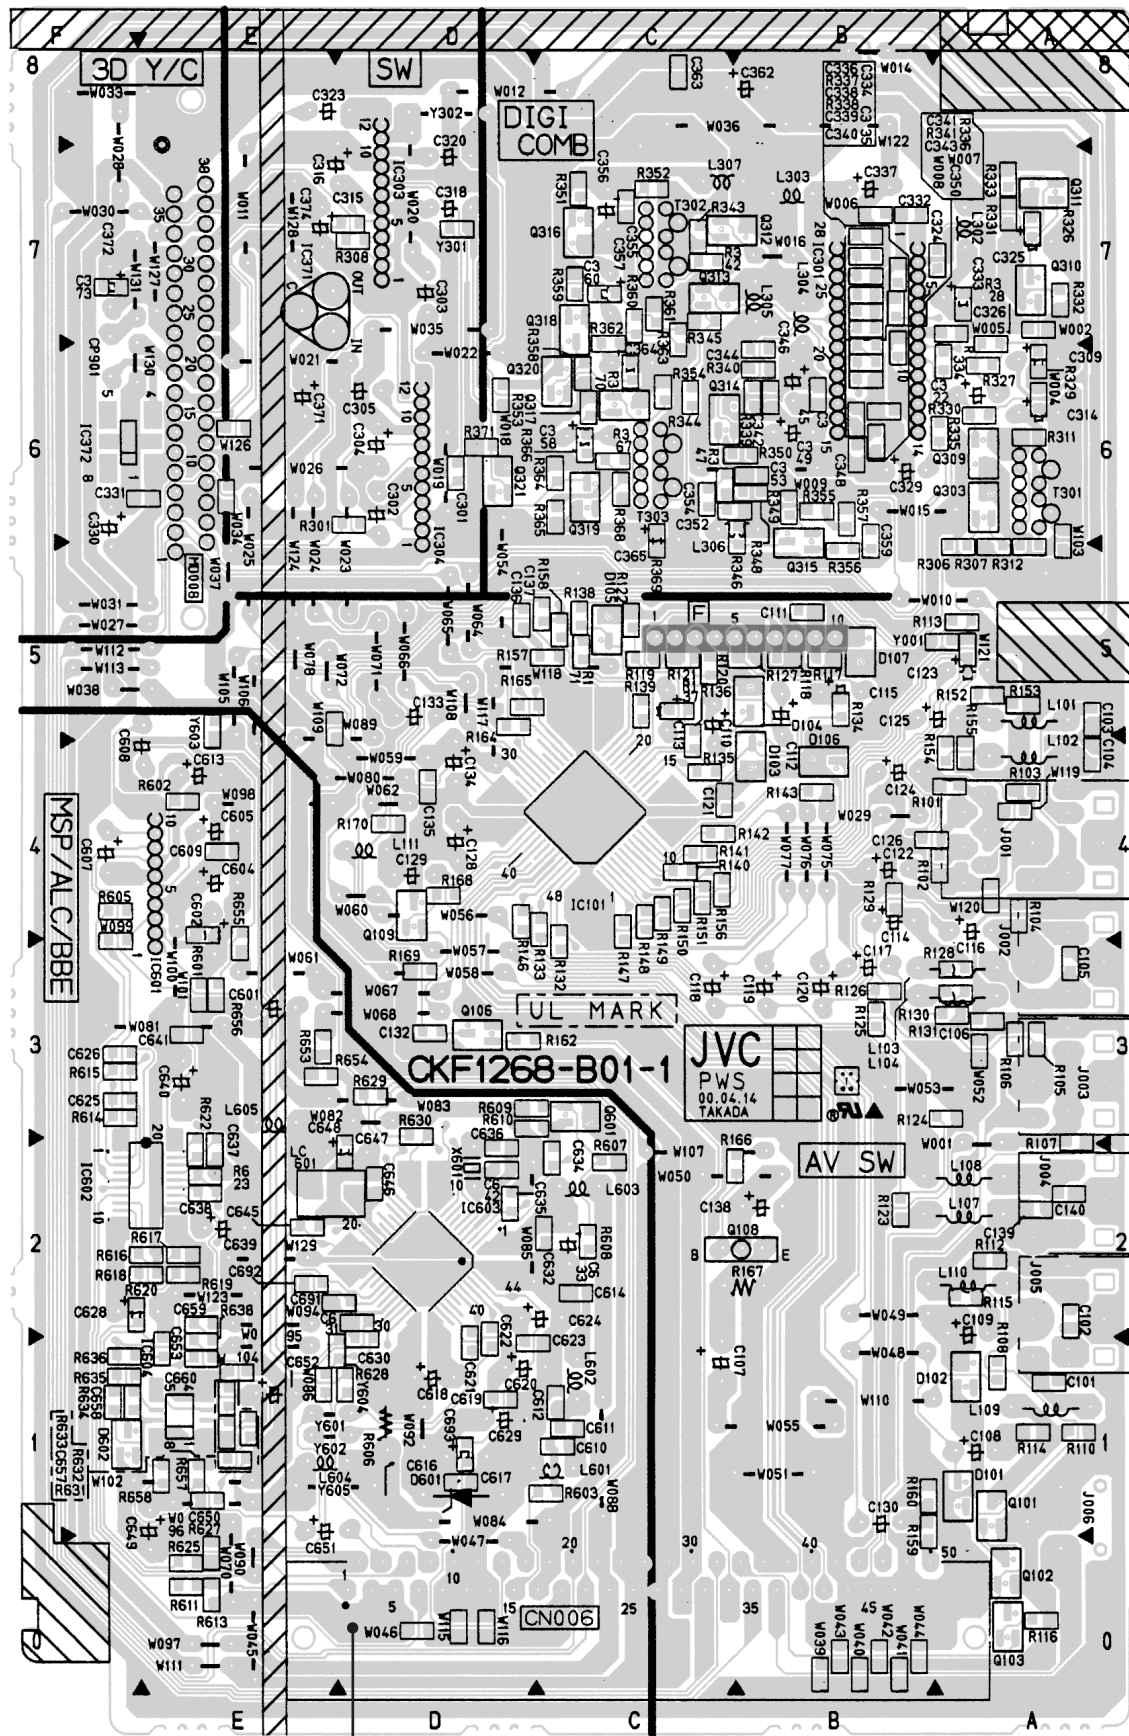

(11)