


SECTION 4 CHARTS AND DIAGRAMS

NOTES OF SCHEMATIC DIAGRAM

Safety precautions

The Components identified by the symbol  are critical for safety. For continued safety, replace safety critical components only with manufacturer's recommended parts.

1. Units of components on the schematic diagram

Unless otherwise specified.


- 1) All resistance values are in ohm, 1/6 W, 1/8 W (refer to parts list).
Chip resistors are 1/16 W.
K or k: k Ω (1000 Ω), M: M Ω (1000k Ω)
- 2) All capacitance values are in μ F, (P: PF).
- 3) All inductance values are in μ H, (m: mH).
- 4) All diodes are 1SS133, MA165 or 1N4148M (refer to parts list).

2. Indications of control voltage

AUX : Active at high

AUX or AUX(L) : Active at low


3. Interpreting Connector indications

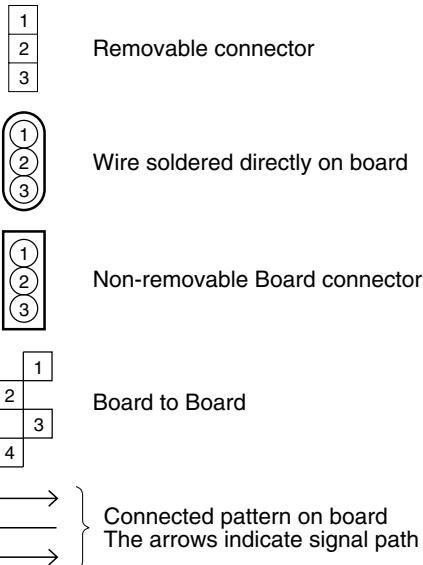

4. Voltage measurement

- 1) Video circuits
REC : Colour bar signal in SP mode, normal VHS mode
PB : Alignment tape, colour bar SP mode, normal VHS mode
— : Unmeasurable or unnecessary to measure
- 2) Audio circuits
REC : 1KHz, -8 dBs sine wave signal in SP mode, Normal VHS mode
PB : REC then playback it
- 3) Movie Camera circuits
Measured using a correctly illuminated gray scale or colour bar test charts in the E-E mode


- 4) Indication on schematic diagram
Voltage Indications for REC and PB mode on the schematic diagram are as shown below.

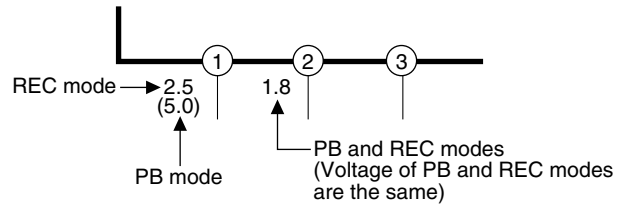


Note: If the voltages are not indicated on the schematic diagram, refer to the voltage charts.

5. Waveform measurement

- 1) Video circuits
REC : Colour bar signal in SP mode, normal VHS mode
PB : Alignment tape, colour bar SP mode, normal VHS mode
- 2) Audio circuits
REC : 1KHz, -8 dBs sine wave signal in SP mode, normal VHS mode
PB : REC then playback it
- 3) Movie Camera circuits
Measured using a correctly illuminated gray scale or colour bar test charts in the E-E mode
- 4) Indication on schematic diagram
Waveform indications on the schematic diagram are as shown below.

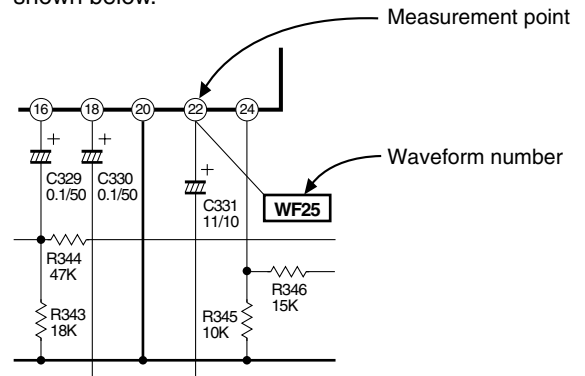


5) Waveform indications

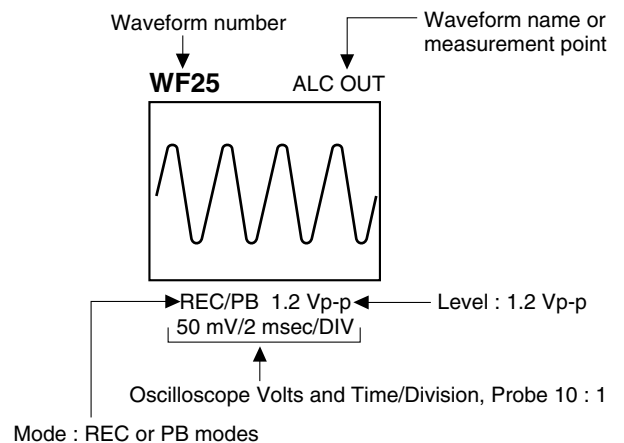


6. Signal path Symbols

The arrows indicate the signal path as follows.

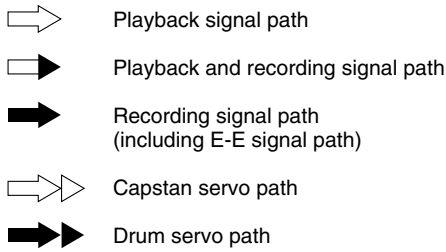


(Example)



7. Indication of the parts for adjustments

The parts for the adjustments are surrounded with the circle as shown below.



8. Indication of the parts not mounted on the circuit board

“OPEN” is indicated by the parts not mounted on the circuit board.




CIRCUIT BOARD NOTES

1. Foil and Component sides

- 1) Foil side (B side) :
Parts on the foil side seen from foil face (pattern face) are indicated.
- 2) Component side (A side) :
Parts on the component side seen from component face (parts face) indicated.

2. Parts location guides


Parts location are indicated by guide scale on the circuit board.

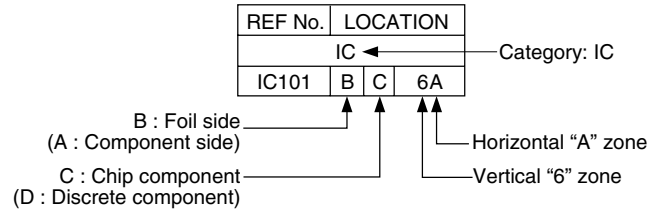

Note:

For general information in service manual, please refer to the Service Manual of GENERAL INFORMATION Edition 4 No. 82054D (January 1994).

4.1 BOARD INTERCONNECTIONS

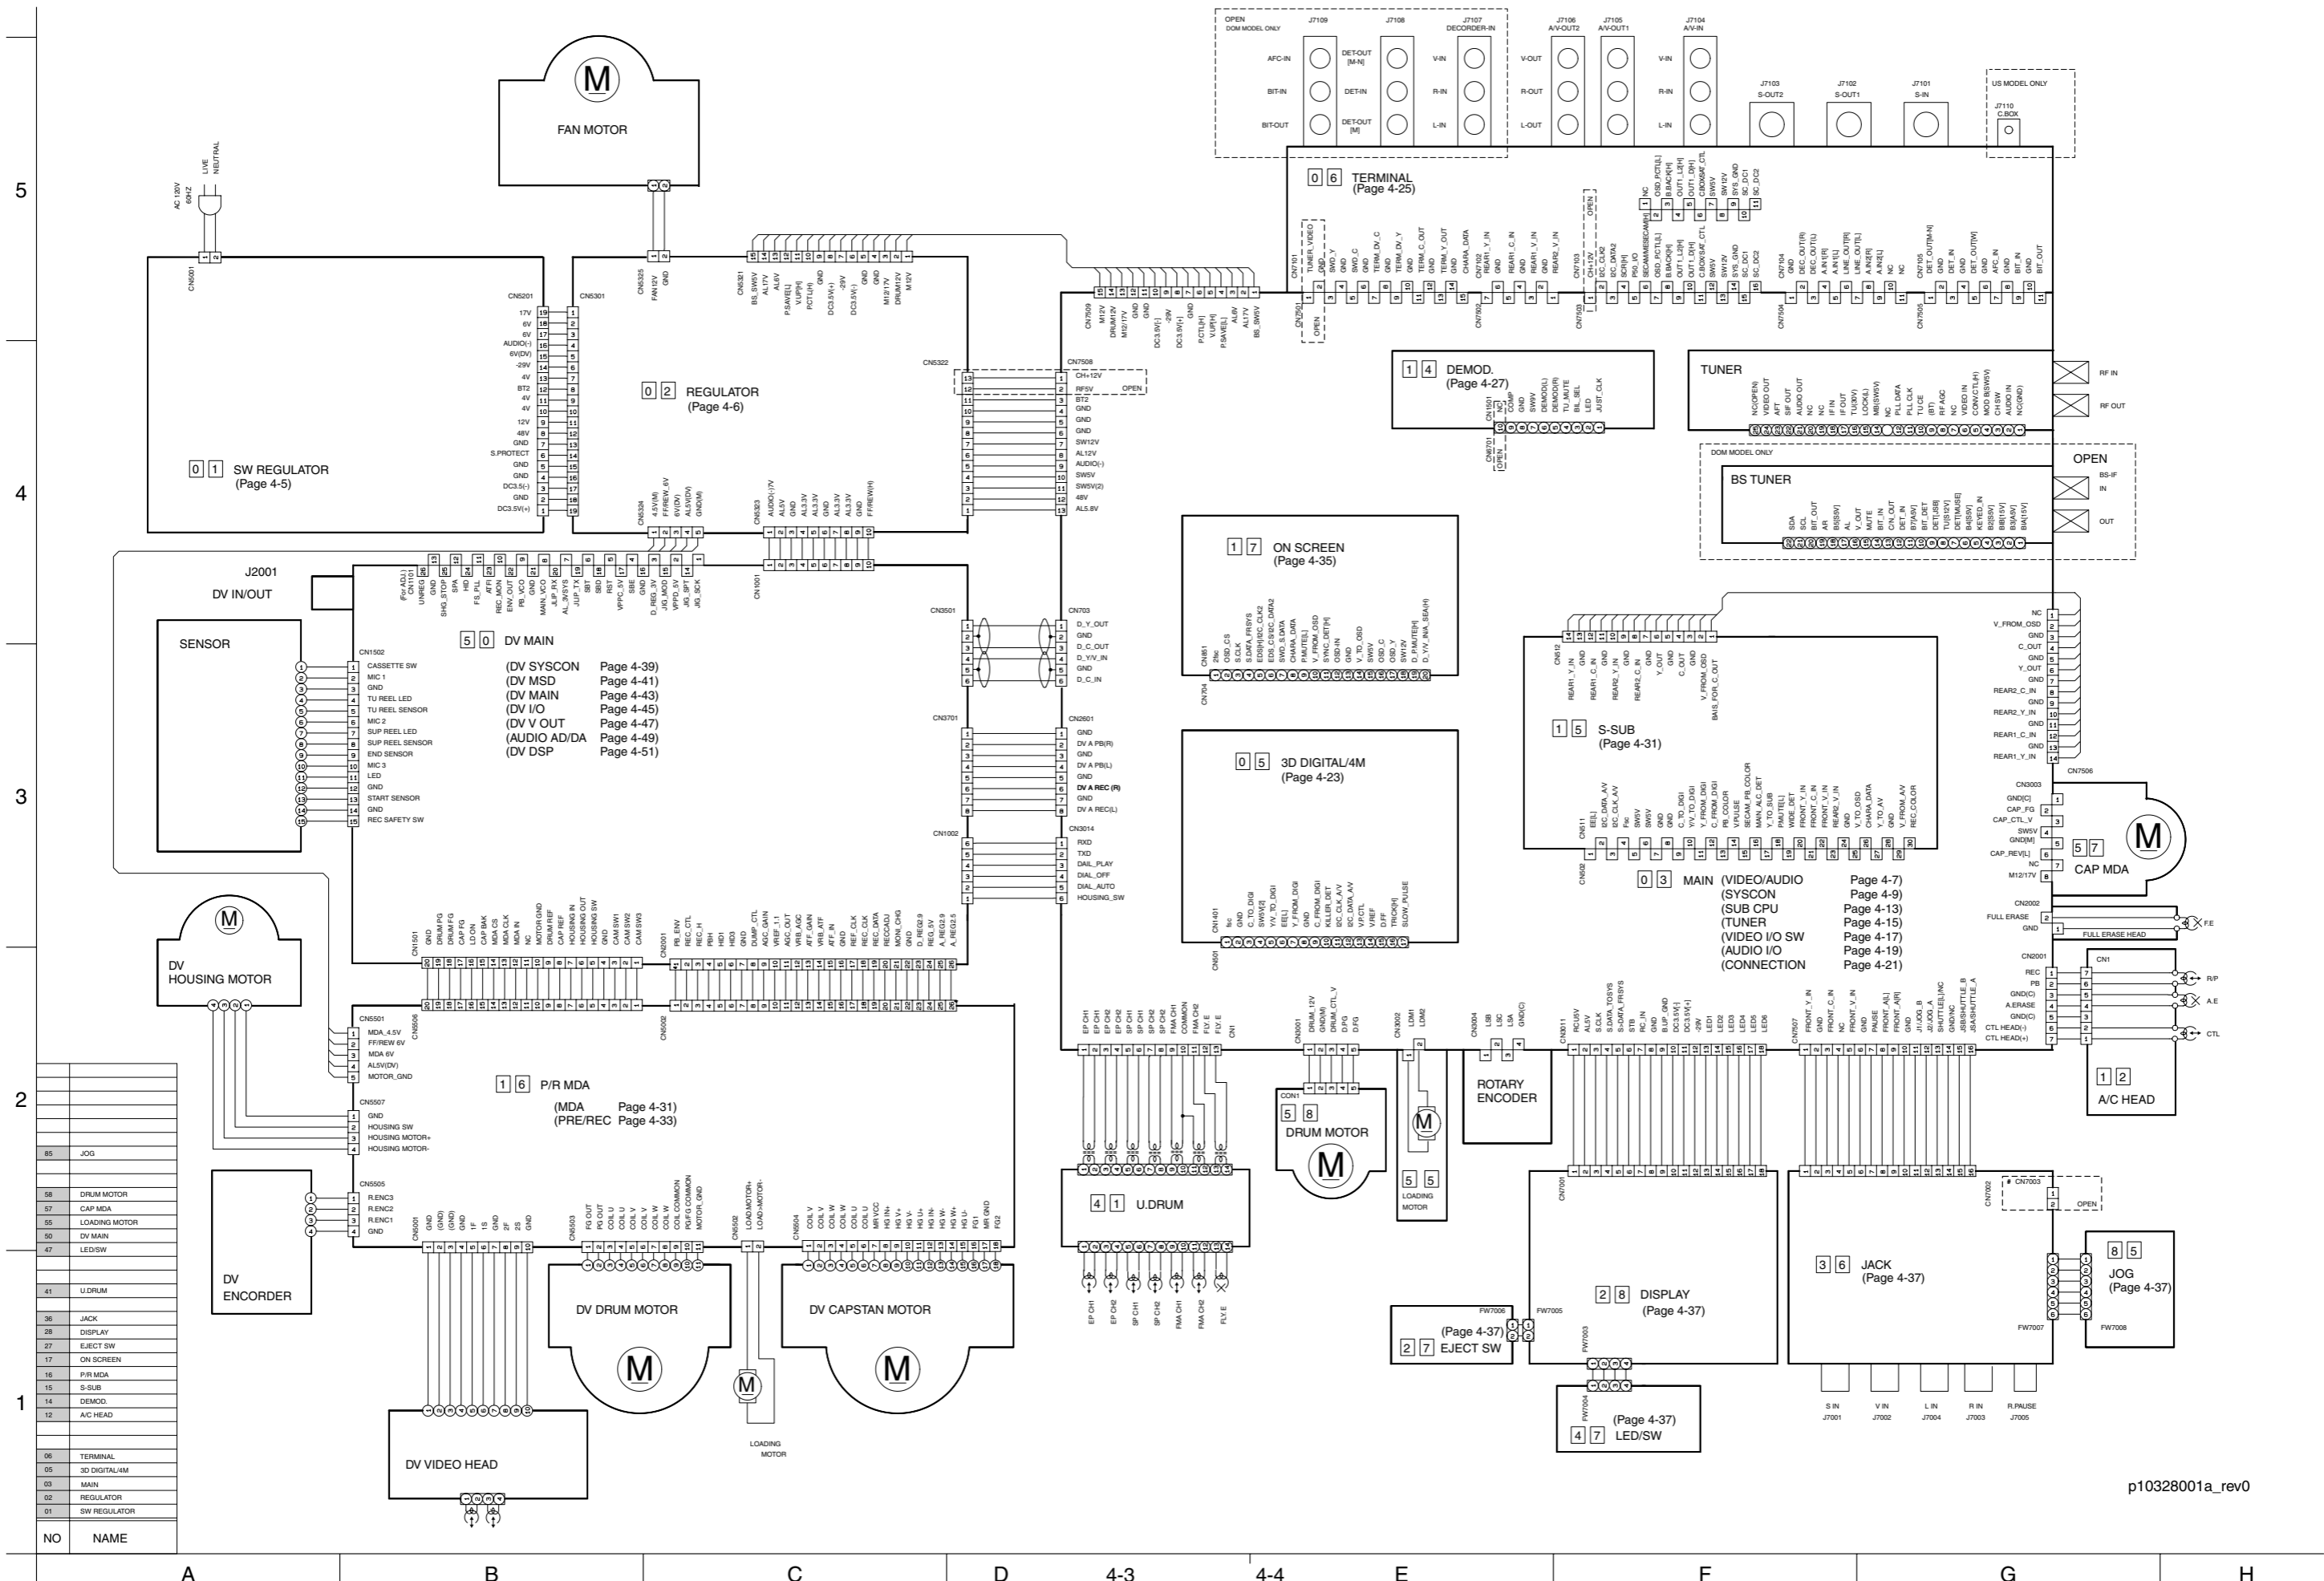

5

4

3

2

1

A

B

C

D

4-3

4-4

E

F


G

H

NO	NAME
01	SW REGULATOR
02	REGULATOR
03	MAIN
05	3D DIGITAL/4M
06	TERMINAL
12	A/C HEAD
14	S-SUB
15	DEMOD.
17	ON SCREEN
27	EJECT SW
28	DISPLAY
36	JACK
41	U.DRUM
47	LED/SW
50	DV MAIN
55	LOADING MOTOR
57	CAP MDA
58	DRUM MOTOR
85	JOG

4.2 SWITCHING REGULATOR AND REGULATOR SCHEMATIC DIAGRAMS

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

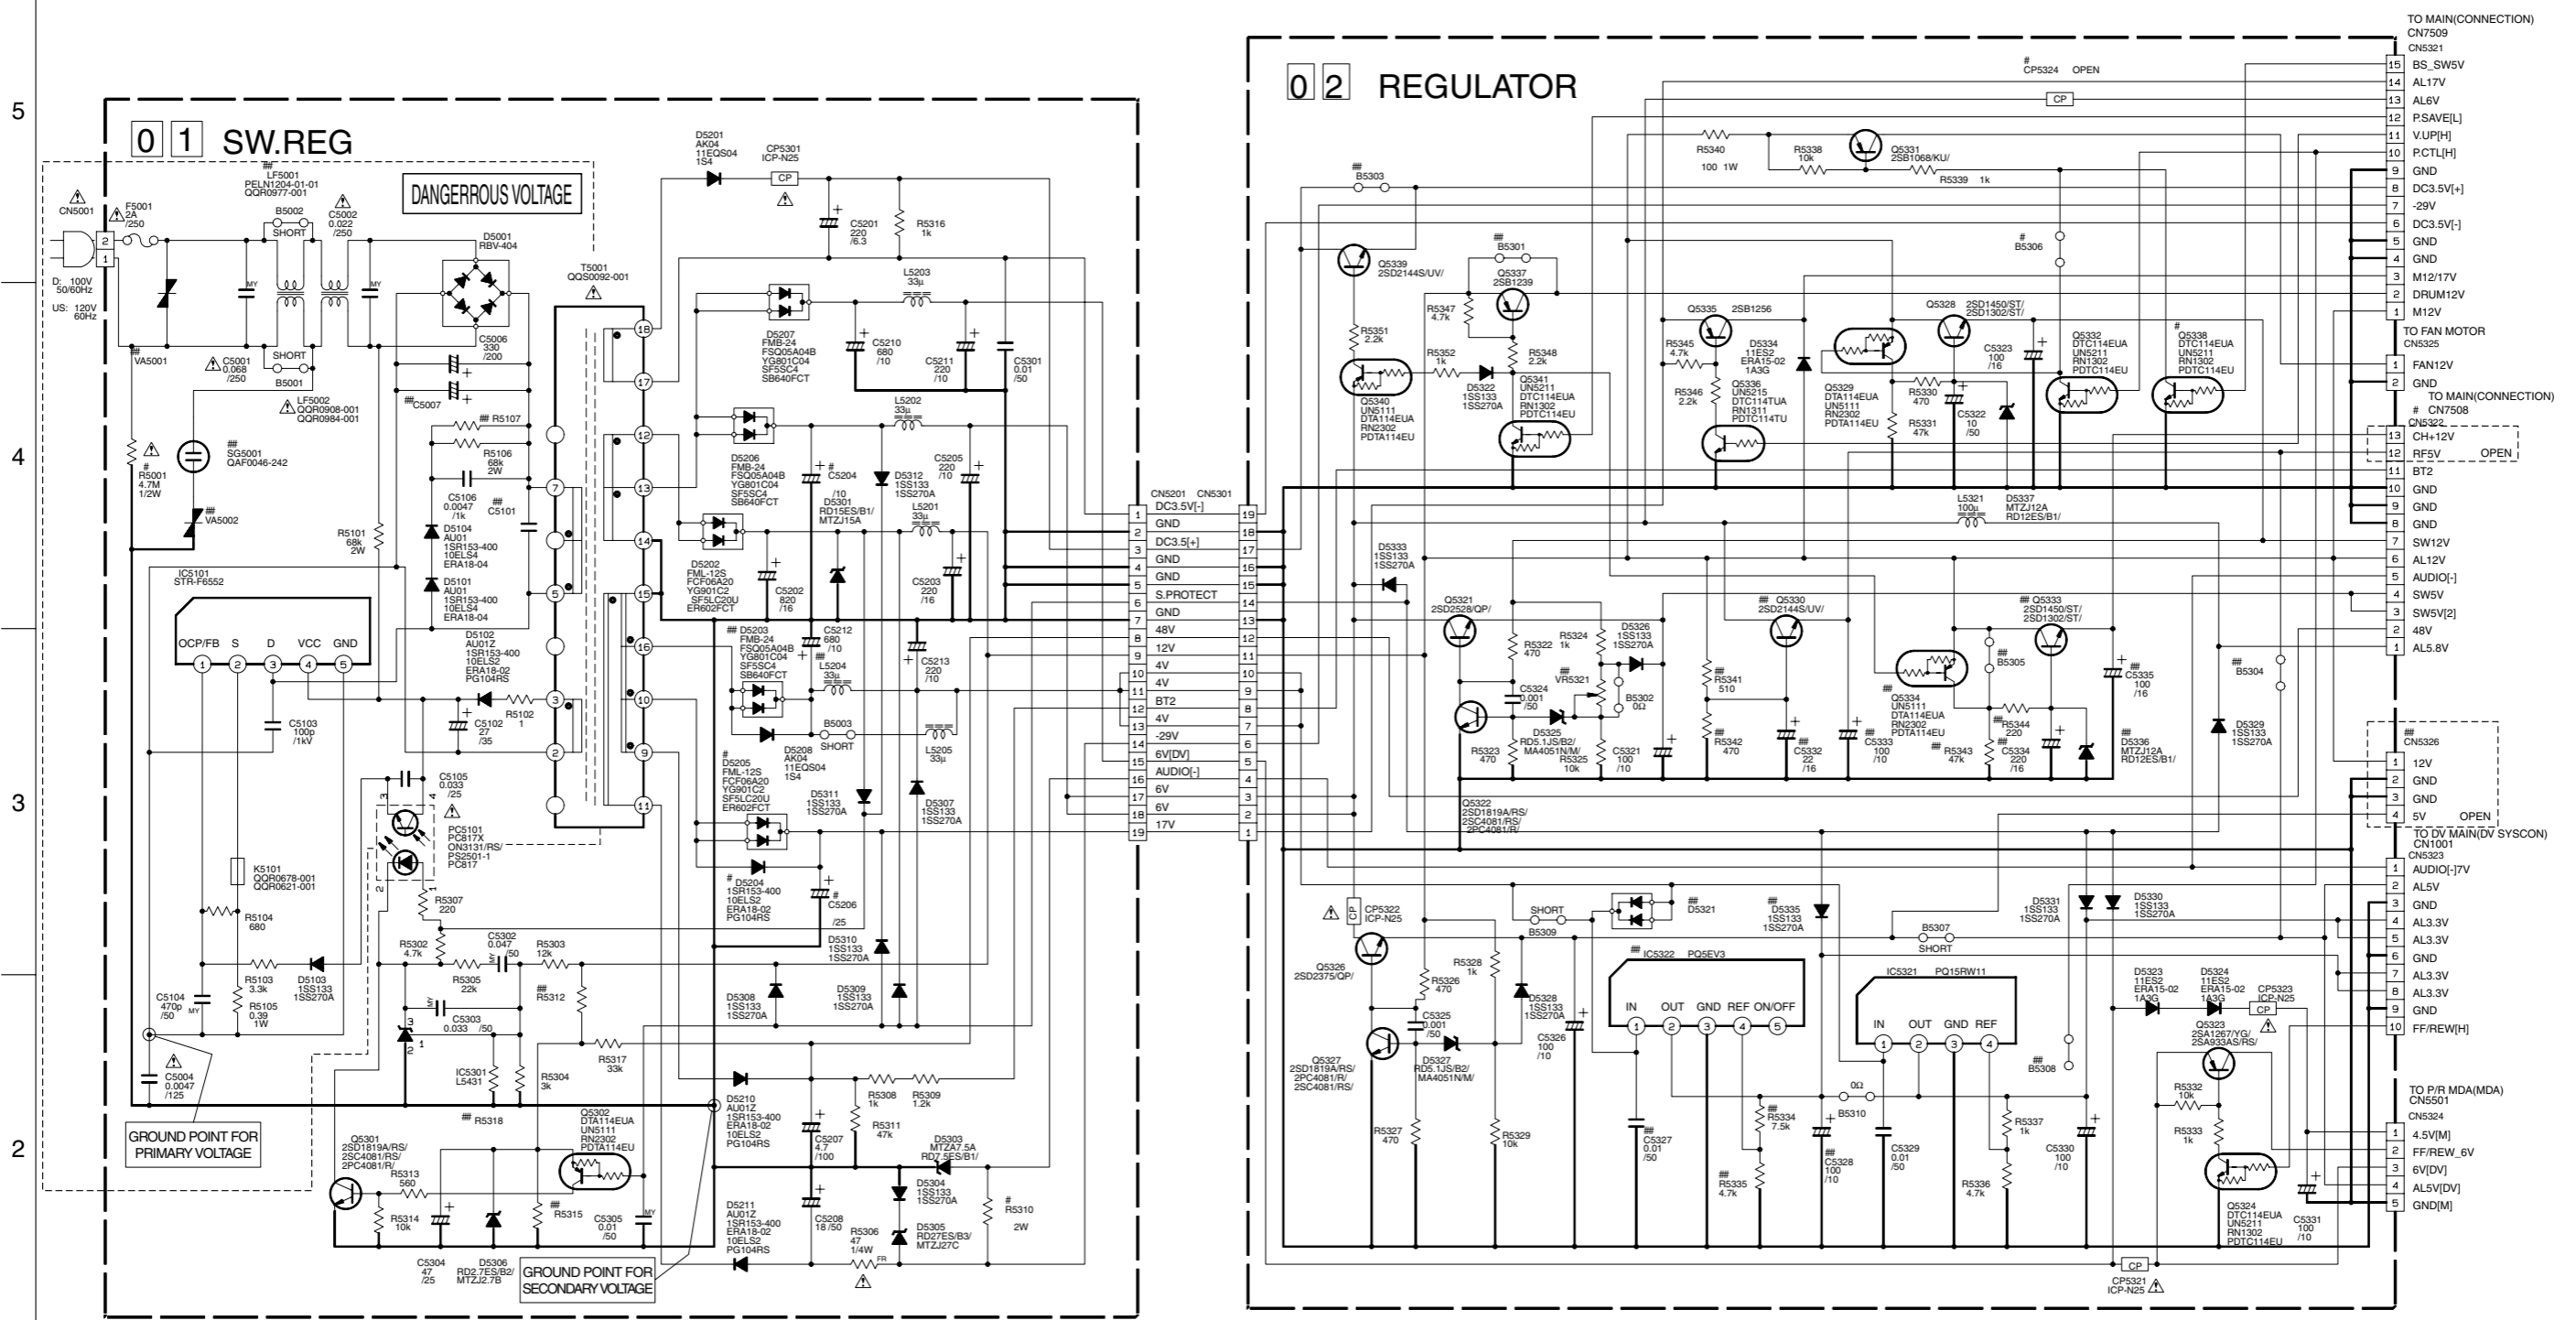


DIFFERENCE TABLE

	D5204	D5205	R5001	R5310	C5204	C5206	Q5308	CP5324	B5306
DOM	NO	YES	NO	680	2700	330	YES	YES	NO
US	YES	NO	YES	820	2200	180	NO	NO	YES

MARK ELEMENTS ARE NOT MOUNTED
p20190001a_rev1

4.3 VIDEO / AUDIO SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

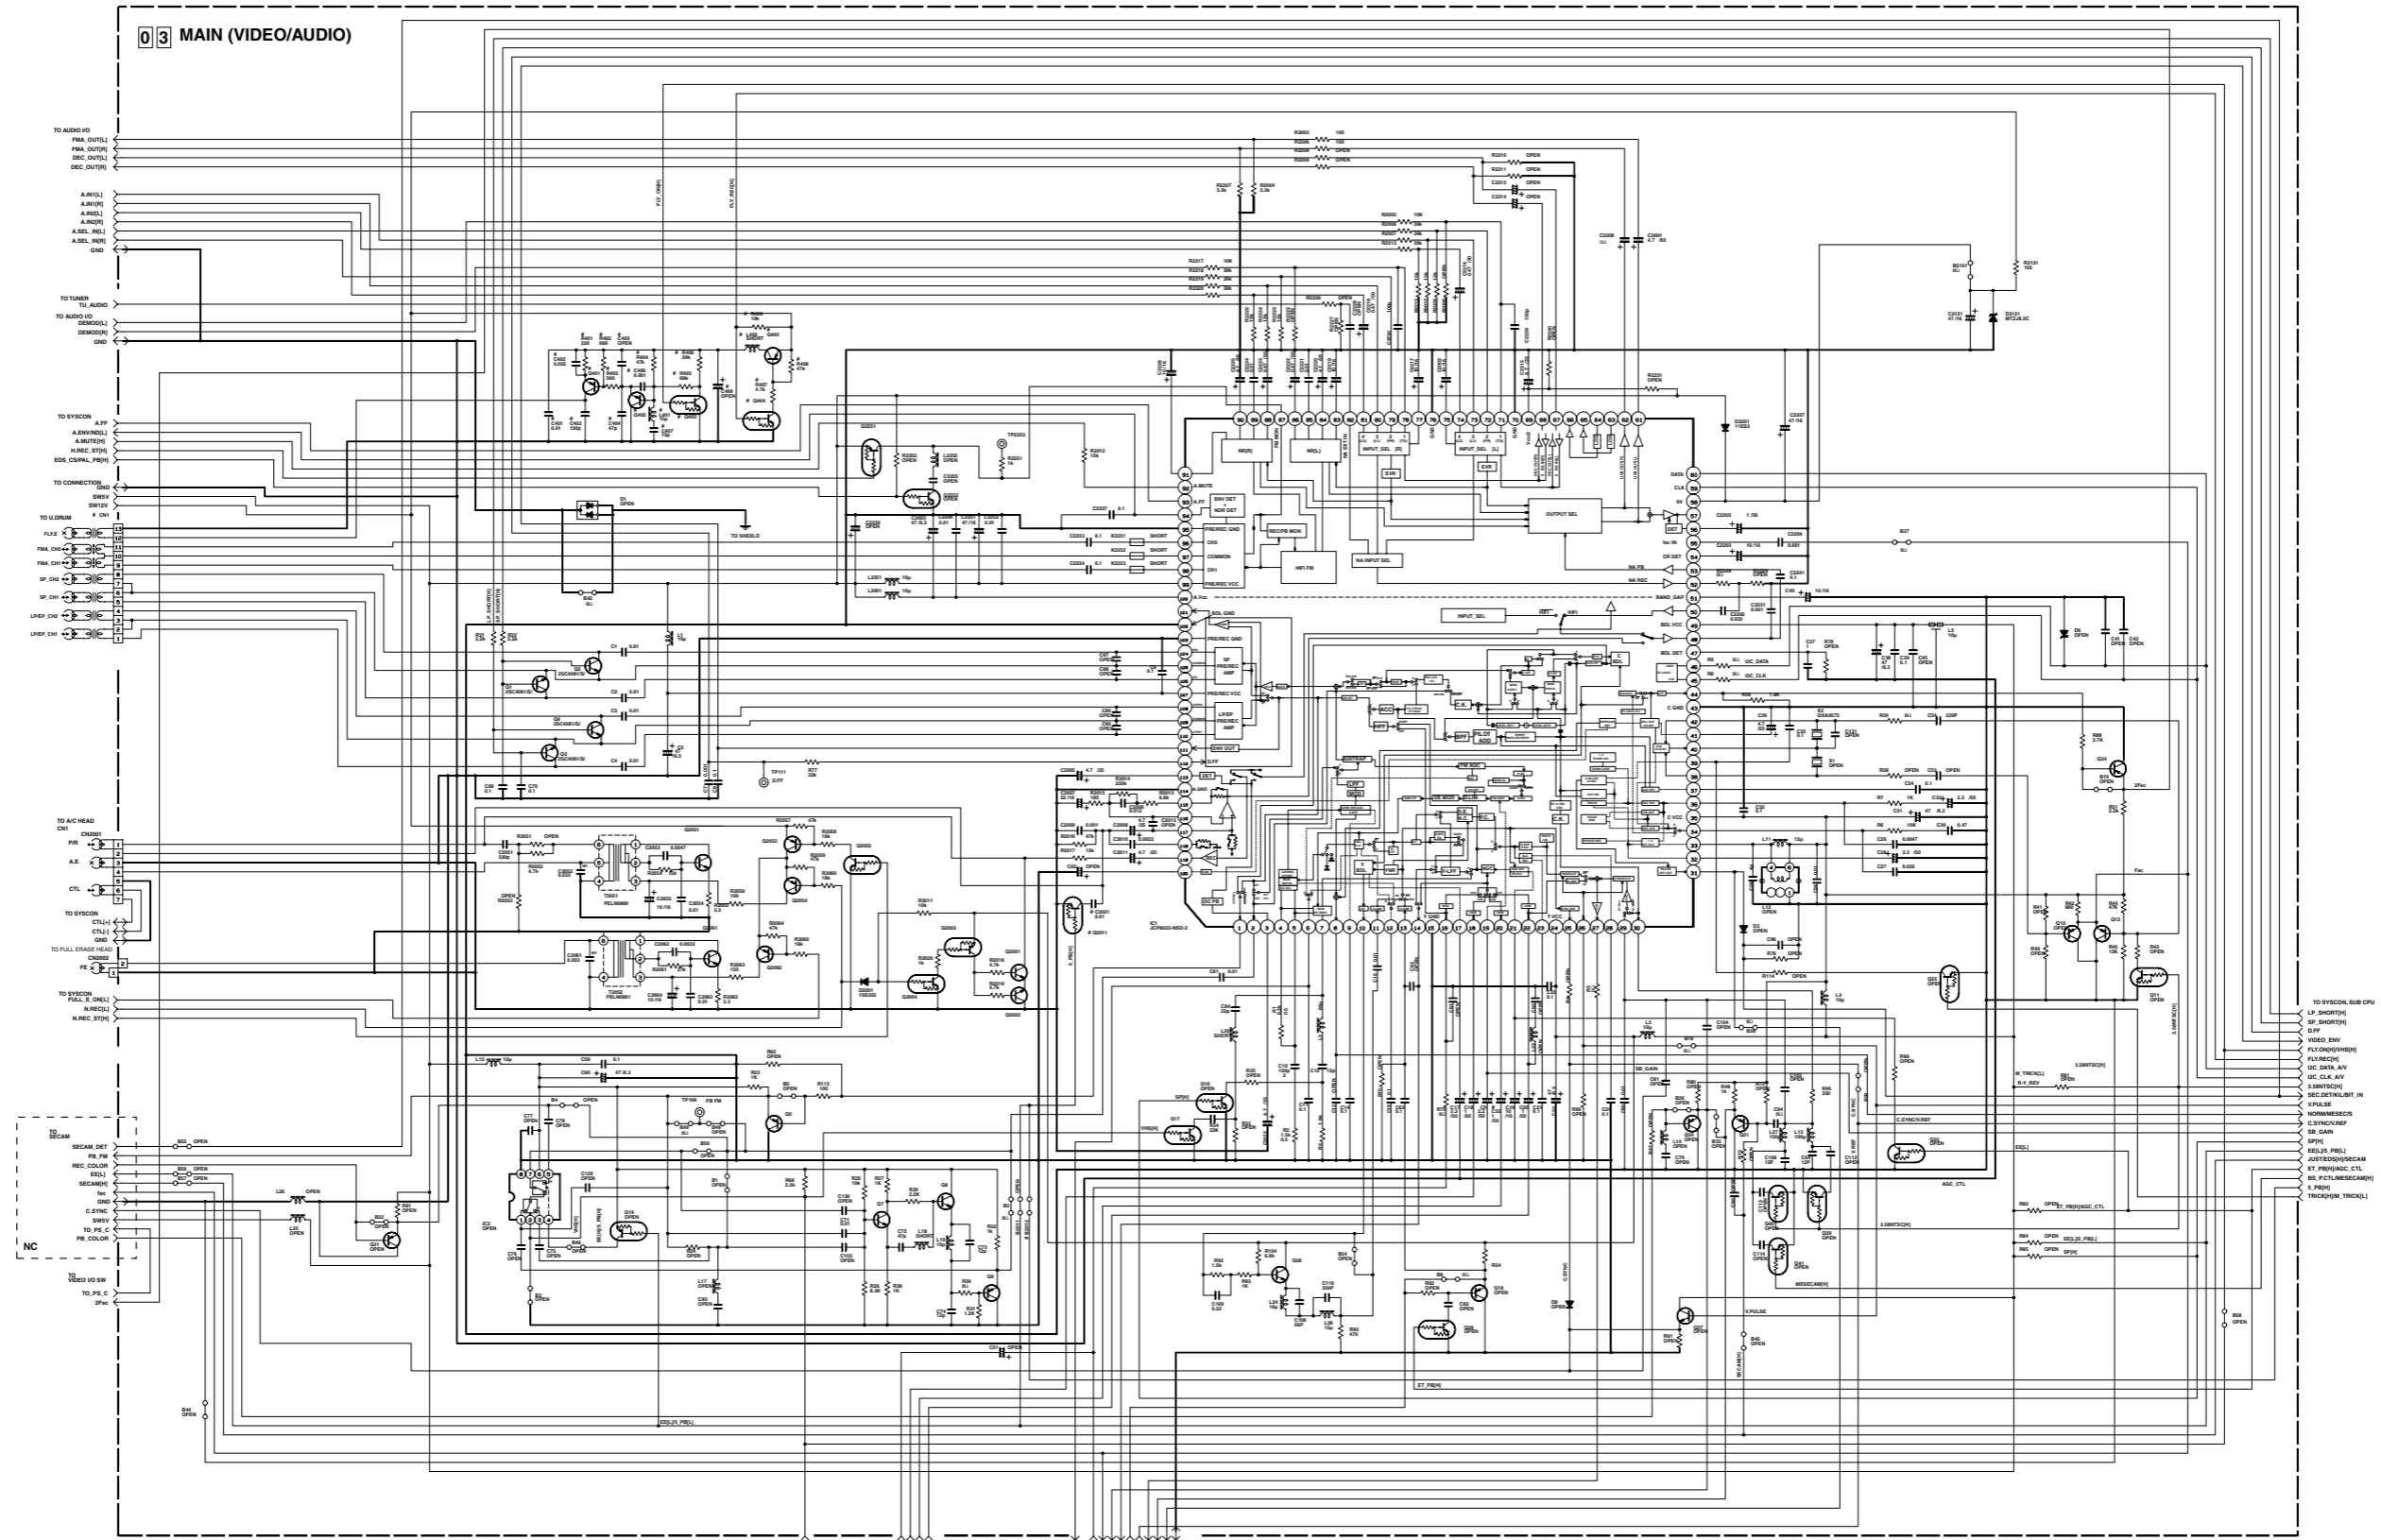

p10325001a_rev0

DIFFERENCE TABLE

SYMBOL	Q101-Q105 L401-L402 R401-R409 C401-C407,C409	CN1
W/FE HEAD	○	1-13
W/O FE HEAD	×	1-11

SYMBOL	C2011 C2021 B2012
W/SS, PB	○
W/O SS, PB	×

SYMBOL	C82
W/BS	○
W/O BS	×

NOTES: UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN pF.
 ALL NPN TYPE TRANSISTORS ARE 2SC4881/90R5/
 ALL PNP TYPE TRANSISTORS ARE 2SA1576A/62A/
 ALL NPN TYPE DIGITAL TRANSISTORS ARE DT0144W/A
 ALL PNP TYPE DIGITAL TRANSISTORS ARE DT0144W/A

ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR


5
4
3
2
1

A B C D 4-7 4-8 E F G H

4.4 SYSTEM CONTROL SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

03 MAIN (SYSCON)

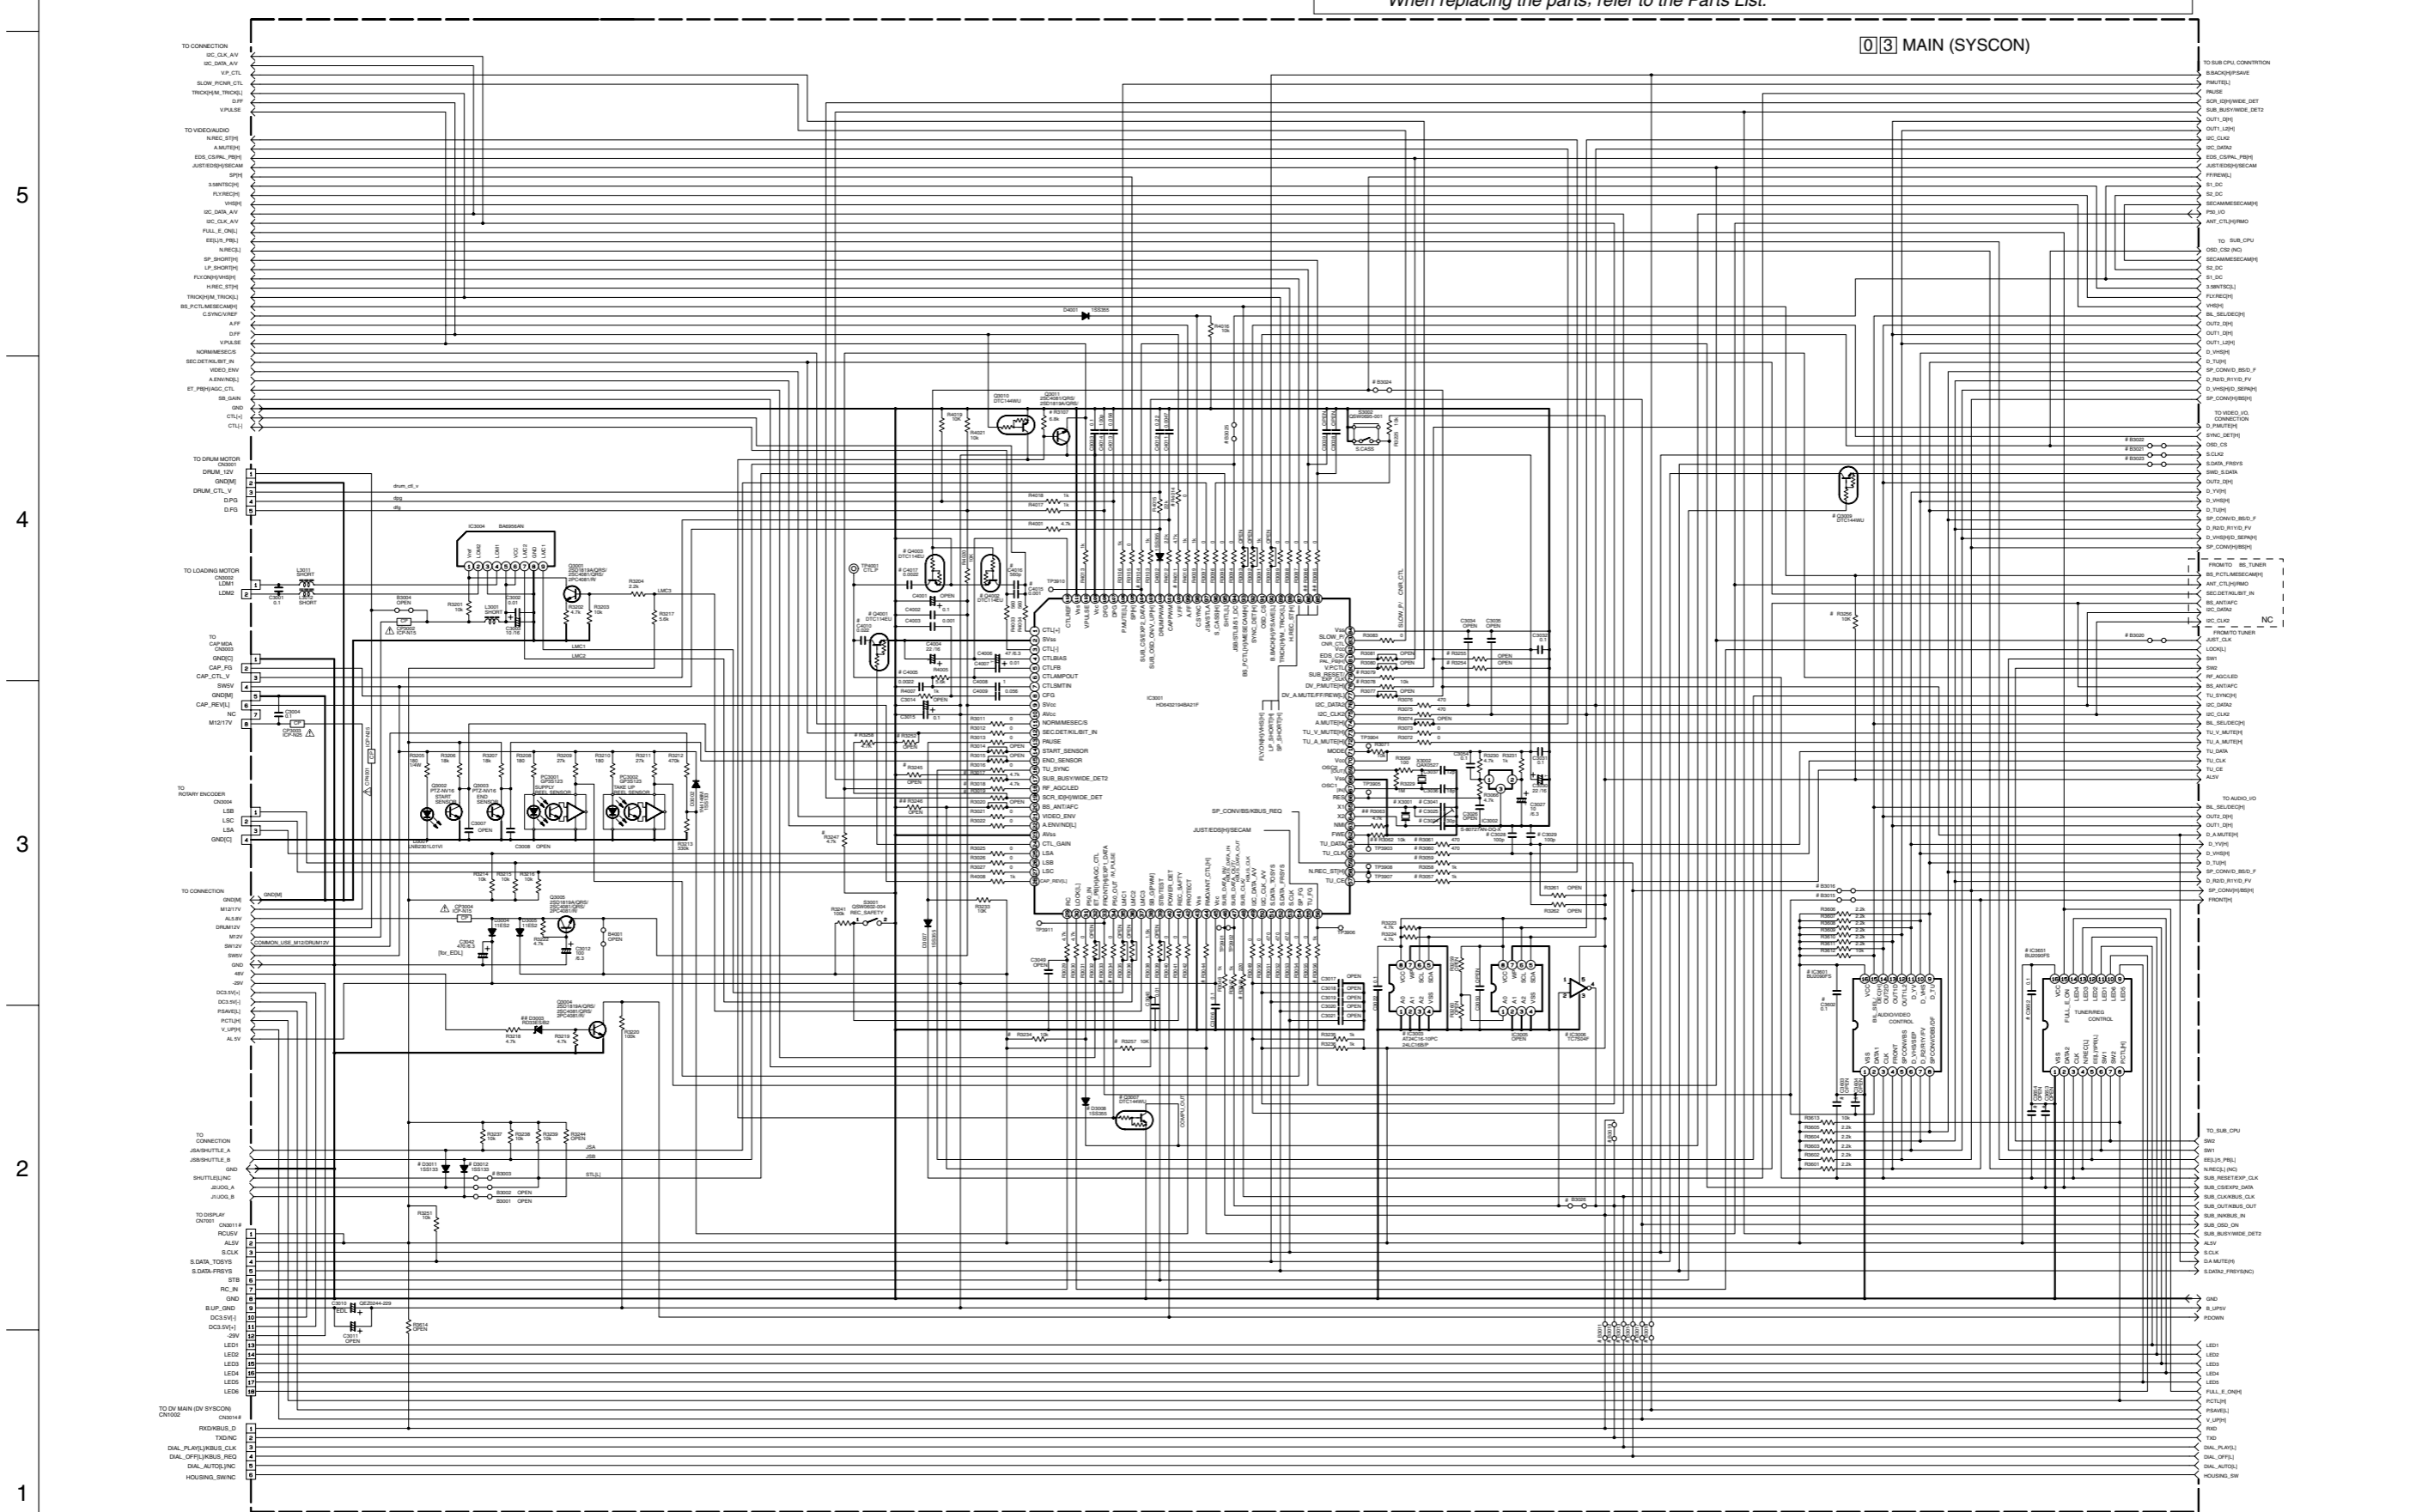

NOTES UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN µF.
 [Symbol] ELECTROLYTIC
 [Symbol] CERAMIC
 [Symbol] MYLAR
 [Symbol] NON POLAR

Marked elements may differ depending on the model. Be sure to check the Parts List.

p1029001a_rev3


#DIFFERENCE TABLE
 ○ : Used
 X : Not used

ITEM		HR-DVS2 /SR-VS20 EU/EK	MS	US	DOM	HM-HDS1 DOM	PAL	MS	US
JOG/S	B3003 D3011 D3012	○	○	○	○	X	X	X	X
CTL_GAIN	C4010 Q4001	○	○	○	○	○	○	○	○
SEC.DET/KIL/BIT_IN	R3252	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
SUB_BUSY/W.DET2	R3245	X	X	X	X	X	X	X	X
	R3017	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k
RF_AGC/LED	R3018	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k	4.7k
	R3247	X	X	4.7k	X	X	X	X	4.7k
SCR_ID/WIDE	R3019	6.8k	6.8k	X	4.7k	4.7k	6.8k	6.8k	X
	R3258	4.7k	4.7k	X	X	X	4.7k	4.7k	X
P50_IN	R3234	10k	10k	X	X	X	10k	10k	X
	Q3007 D3008	○	○	X	X	X	○	○	X
RMO/ANT_CTL	R3257	X	X	X	X	X	X	X	X
	R3044	0Ω	0Ω	X	1k	1k	0Ω	0Ω	X
JUST/EDS/SECAM	R3056	1k	1k	1k	1k	1k	1k	1k	1k
EEPROM	IC3003	16k	16k	8k	8k	8k	8k	8k	8k
TU_CE/CLK/DATA	R3057								
	R3060	○	○	○	○	○	○	○	X
	R3061								
SP_CONV/BS/KBUS_REQ	R3059	1k	1k	1k	1k	470	470	470	470
TU_CLK	C3028	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
TU_DATA	C3029	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
CRYSTAL	X3001	QAX0445	QAX0444	QAX0444	QAX0444	QAX0444	QAX0445	QAX0444	QAX0444
	C3025	○	X	X	X	X	○	X	X
	C3041	X	10p	10p	10p	10p	X	10p	10p
	C3024	22p	12p	12p	12p	12p	22p	12p	12p
EXPANDA	IC3601								
	IC3651								
	C3602								
	C3603								
	C3604	X	X	X	X	○	○	○	○
	C3652 C3653 C3654								
FRONT[H]/EXP1_DATA	B3015	○	○	○	○	X	X	X	X
SP_CONV/BS/KBUS_REQ	B3016	○	○	○	○	X	X	X	X
JUST_CLK	B3020	X	X	X	○	○	X	X	X
BS_PCTL	R3256	X	X	X	X	X	X	X	X
SUB_D.IN/KBUS D.IN/RXD	B3011	X	X	X	X	○	○	○	○
	B3019	X	X	X	X	1k	1k	1k	1k
SUB_D.OUT/KBUS D.OUT/TXD	B3012	X	X	X	X	X	X	X	X
SUB_CLK/KBUS CLK/DIAL_PLAY	B3013	X	X	X	X	○	○	○	○
SP_CONV/BS/KBUS_REQ /DIAL_OFF	B3014	X	X	X	X	○	○	○	○
CN3014	CN3014	1-6pin	1-6pin	1-6pin	1-6pin	1-6pin	1-6pin	1-6pin	1-6pin
KBUS_DATA	IC3006	X	X	X	X	○	○	○	○
	B3026	○	○	○	○	X	X	X	X
SUB_OSD_ONV/UP	B3017	X	X	X	X	○	○	○	○
D_PMUTE	R3078	1k (10kΩ)	1k	1k	1k	1k	1k	1k	1k
	R3255	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
D_A.MUTE/FF/REW	R3254	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN	OPEN
	B3024	X	X	X	X	○	○	○	○
EDS	Q3009	X	X	○	X	X	X	X	○
OSD	B3021								
	B3022	X	X	X	X	○	○	○	○
	B3023								
JBS/STLB/S1_DC	B3025	X	X	X	X	○	X	X	X
CN3011	CN3011	1-18pin	1-18pin	1-18pin	1-18pin	1-18pin	1-18pin	1-18pin	1-18pin
SUB_RESET/EXP.CLK FF/REW	R3079	1k	1k	1k	1k	1k	1k	1k	1k
	C4015	680p (330p)	680p	0.001	680p	680p	680p	680p	0.001
	Q4002 C4016	○	○	X	○	○	○	○	X
	Q4003 C4017	○	○	○	○	○	○	○	○
	C4005	X	X	X	X	X	X	X	X
SUB_CLK/KBUS_CLK	R3048	220	220	220	220	220	220	220	
B.BACK/P.SAVE	B3018	X	X	X	X	○	○	○	○
IN_SELA/EXP1_DATA	R3033	0Ω	0Ω	0Ω	0Ω	1k	1k	1k	1k
SUB_CS/EXP2_DATA	R3104	4.7k	4.7k	4.7k	4.7k	1k	1k	1k	1k
M_PULSE	Q3010								
	Q3011 R3107	X	X	○	○	○	X	X	○
P50_OUT/M_PULSE	R3034	0Ω	0Ω	4.7k	4.7k	4.7k	0Ω	0Ω	4.7k
	R4011	4.7k (2.2k)	4.7k	1k	1k	2.7k	2.7k	2.7k	2.7k
V.FF	R4014	0Ω (2.2k)	0Ω	1.8k	1.8k	0Ω	0Ω	0Ω	0Ω

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only.
 When replacing the parts, refer to the Parts List.

4.5 SUB CPU SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

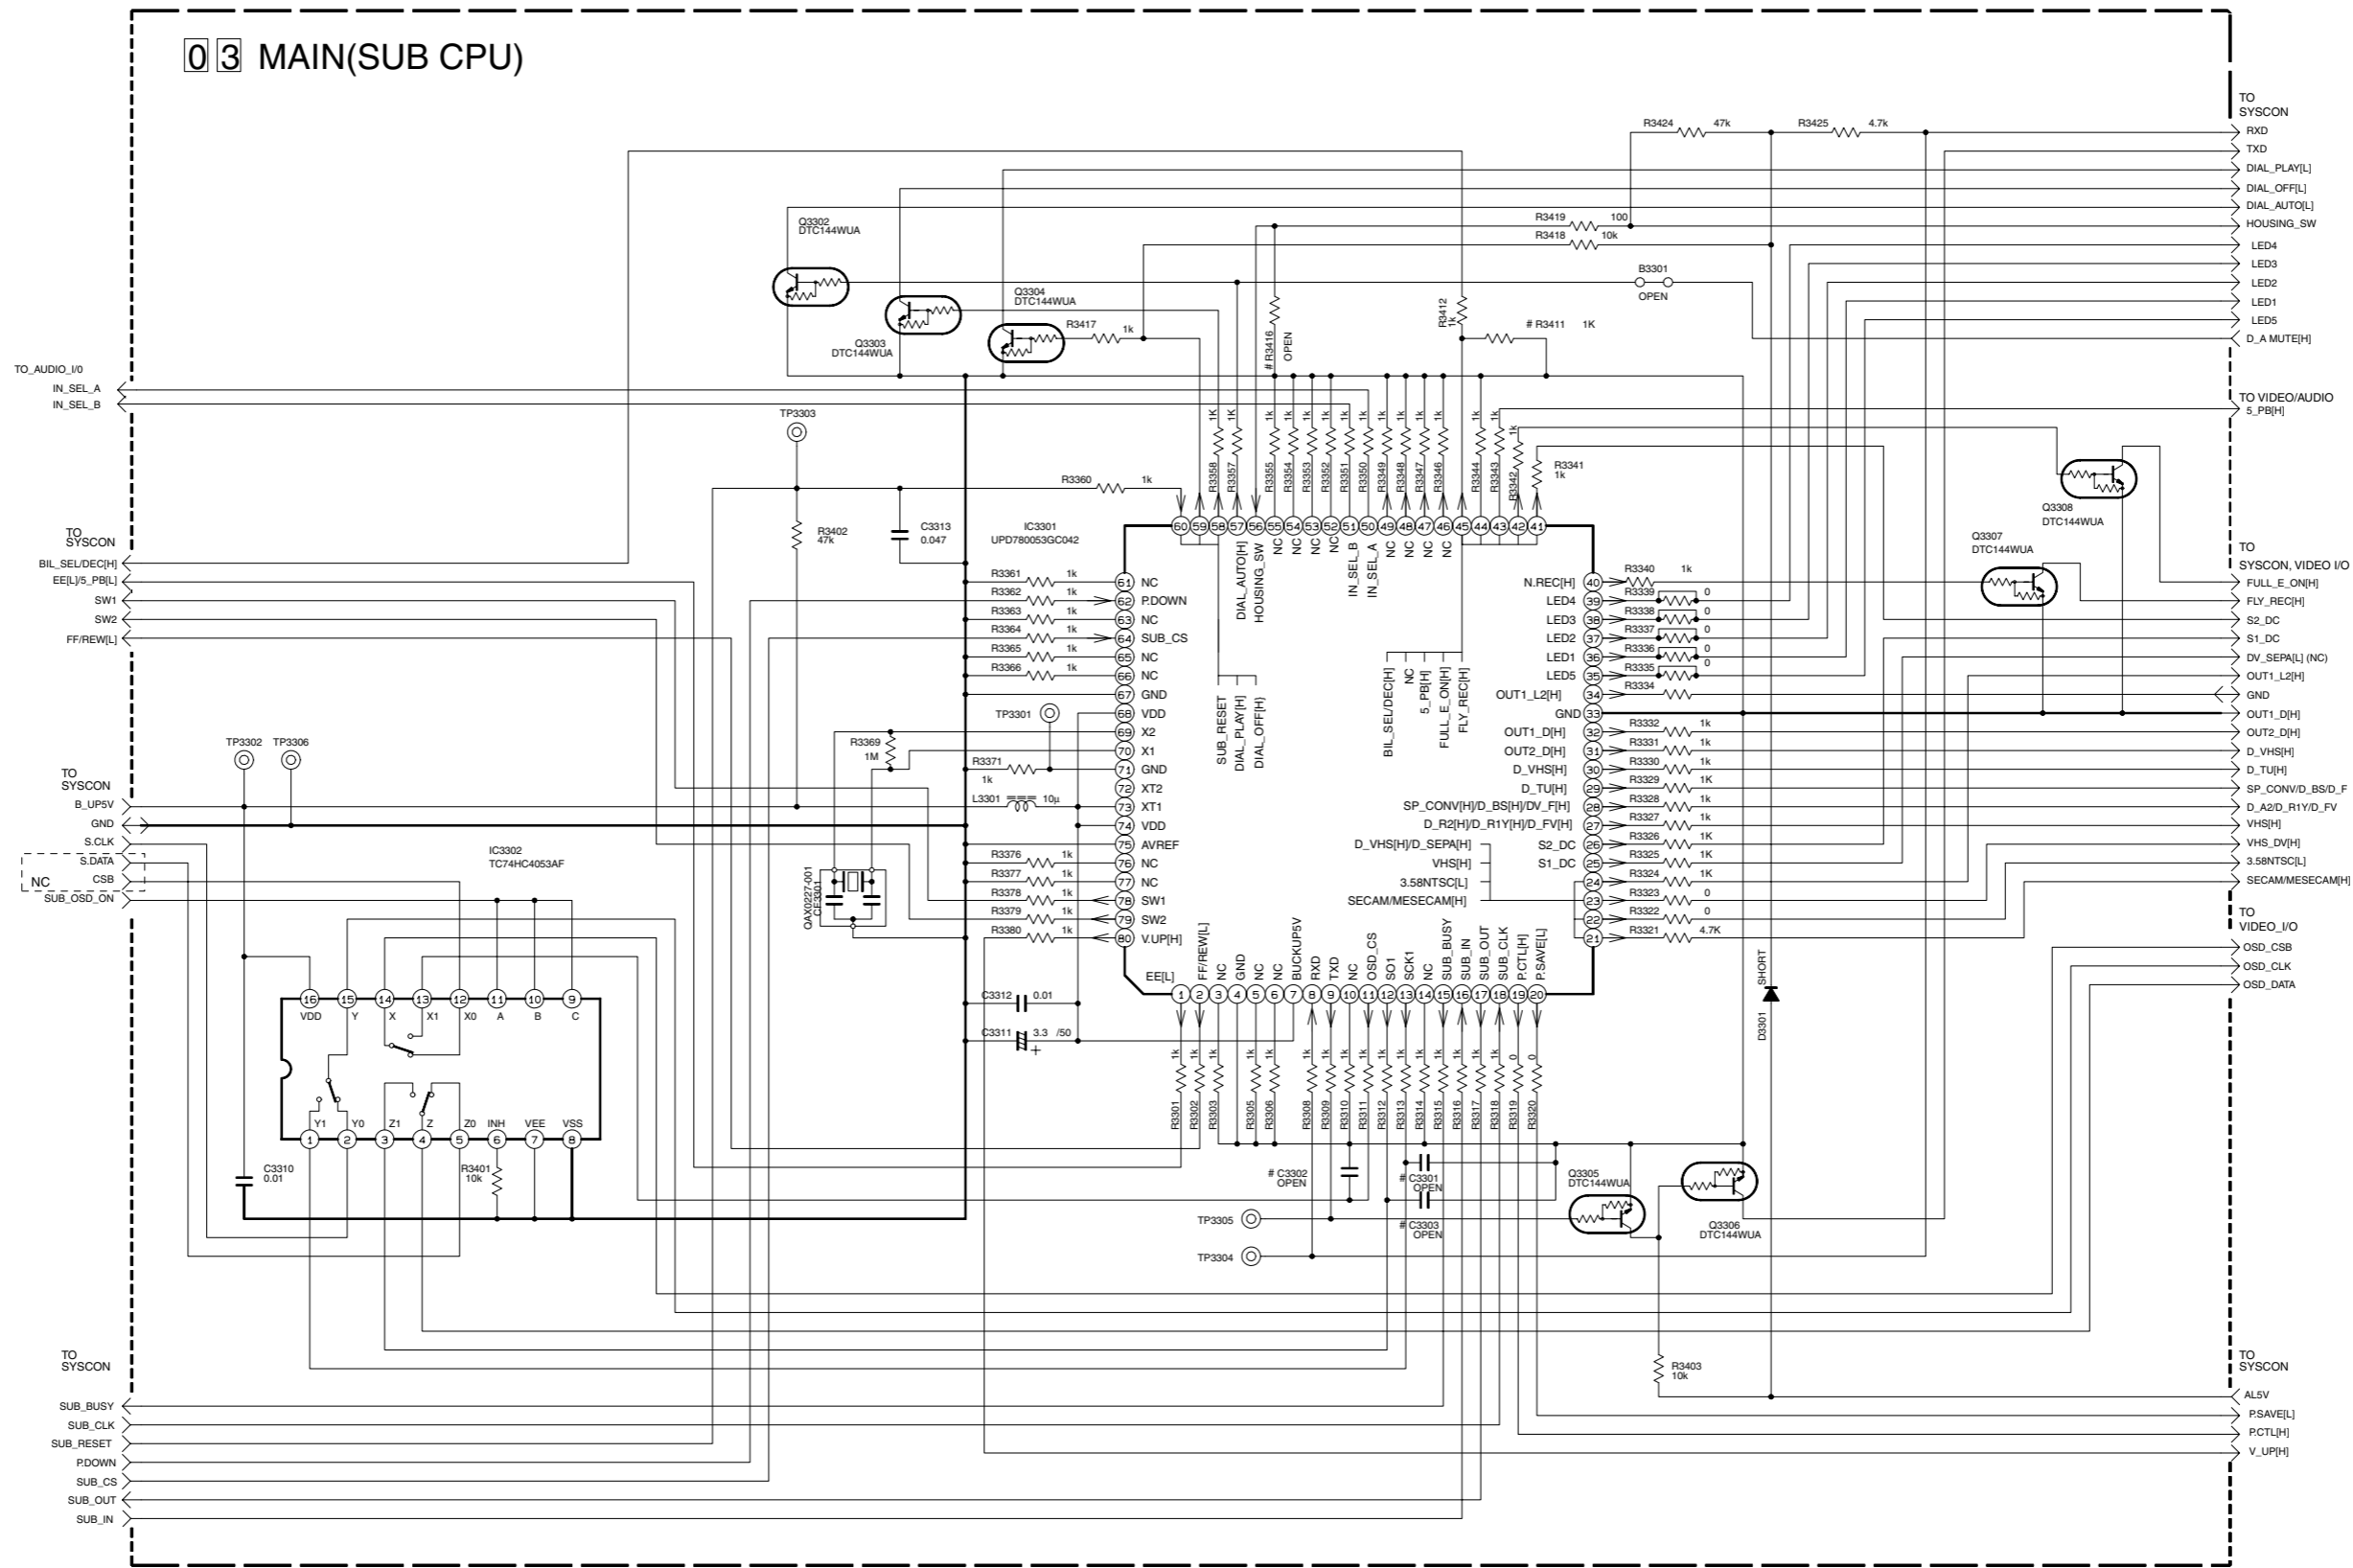

p20174001a_rev1

MARK ELEMENTS ARE NOT MOUNTED.
 NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.


ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

5
4
3
2
1

A B C D 4-13 4-14 E F G H

4.6 TUNER SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

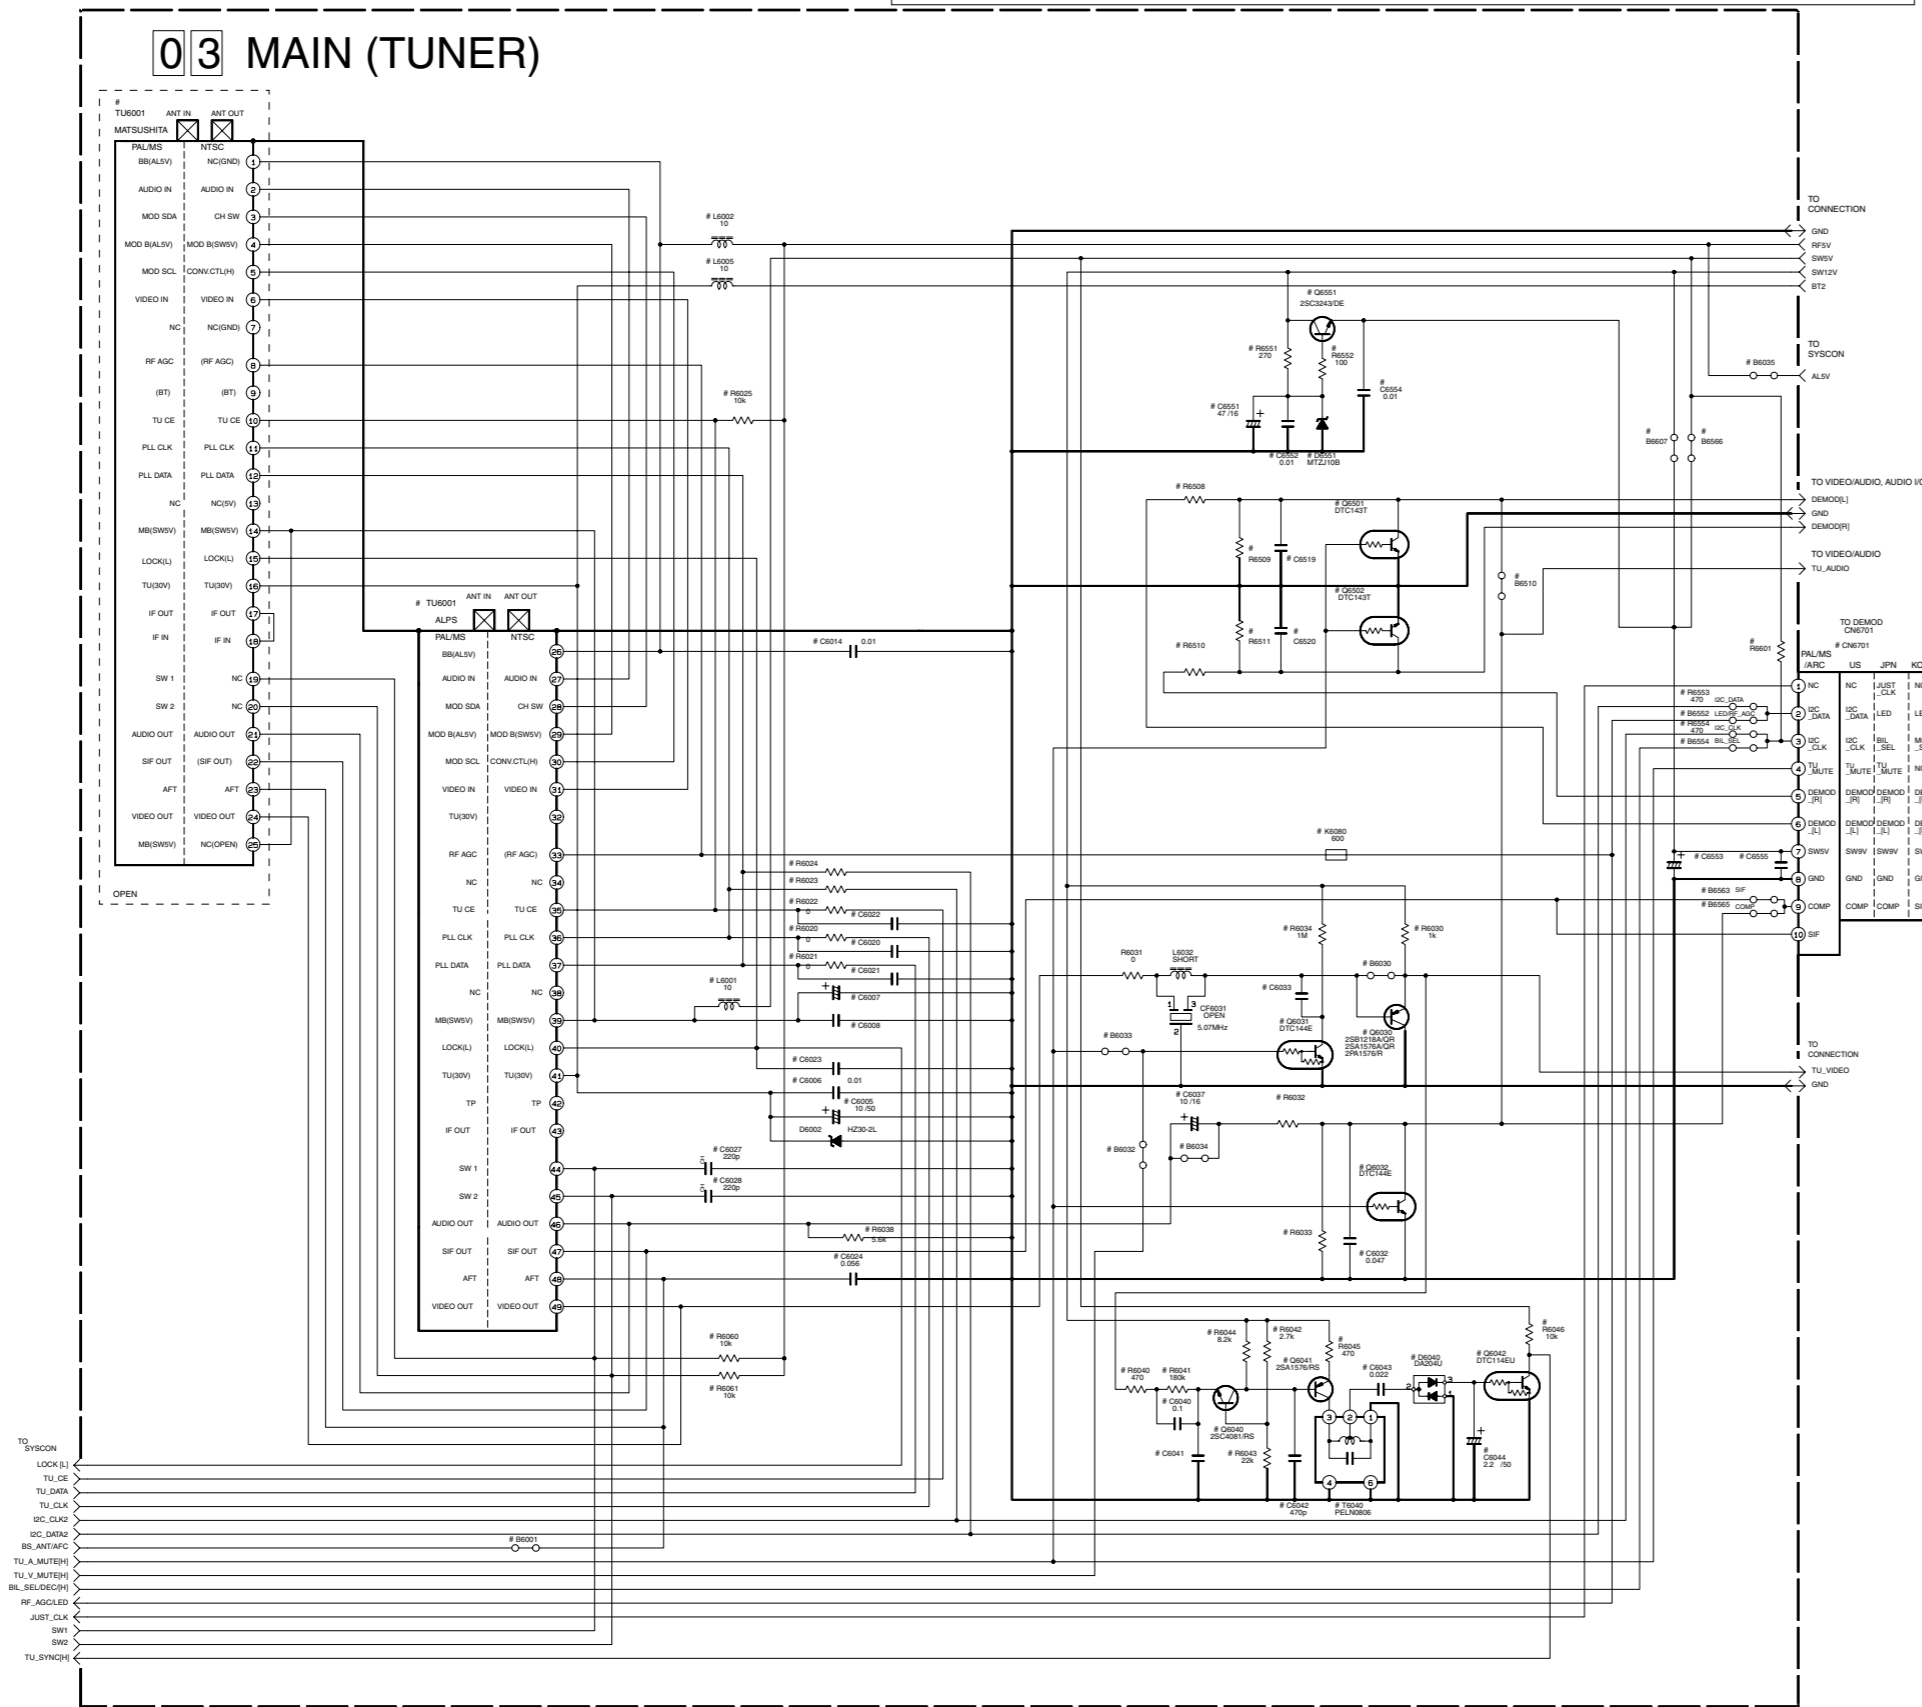

p10306001a_rev0

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN µF.

ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR


DIFFERENCE TABLE
 O Used
 X Not Used

TUNER	SYMBOL	EU/EK	FRANCE	JAPAN			US	
				MS	DVS2	HDS1	DVS2/VSD2	HDS1
TUNER	TU6001	ALPS	ALPS	MATSUSHITA	MATSUSHITA	ALPS	ALPS	
		QAU0151	QAU0152	QAU0188	QAU0198	QAU0163	QAU0163	
ATS+	R6025, R6035	X	X	X	X	X	X	
VIDEO BUFFER	R6030, C6030	O	O	O	O	X	X	
TU_V_MUTE	B6031	O	O	O	X	X	X	
TU_A_MUTE	R6032	O	O	X	X	X	X	
AUDIO OUT	R6033	3.3k	3.3k	0	0	12k	12k	
	R6034	1.8k	1.8k	X	X	X	X	
	R6038	X	X	X	X	X	X	
	C6032	0.047	X	X	X	X	X	
	R6034	X	X	O	O	O	O	
	C6037	O	O	X	X	X	X	
AFC	B6001	O	O	X	X	O	X	
CENELEC	C6027, C6028	X	O	X	X	X	X	
	C6005	X	X	X	X	X	X	
	C6006	X	X	X	X	X	X	
TU(SV)	L6005	10	10	SHORT	SHORT	SHORT	SHORT	
	C6007	33010	33010	X	X	X	X	
	C6008	X	X	X	X	X	X	
	L6001	O	O	SHORT	SHORT	SHORT	SHORT	
BB(ALSV)	C6014, L6002	O	O	X	X	X	X	
PLL CLK	R6020	470	470	1k	1k	1k	1k	
	R6023	X	X	X	X	X	X	
	C6020	X	X	X	X	X	X	
PLL DATA	R6021	470	470	1k	1k	1k	1k	
	R6024	X	X	X	X	X	X	
	C6021	X	X	X	X	X	X	
TU CE	R6022	470	470	1k	1k	1k	1k	
	C6022	X	X	X	X	X	X	
LOCK	C6023	O	O	X	X	X	X	
SYSTEM SW	R6030, R6031	O	O	X	X	X	X	
SYNC DET	R6040-R6046, C6040-C6042, D6040, T6040	X	X	X	X	O	O	

DEMODO	SYMBOL	EU/EK	FRANCE	JAPAN			US	
				MS	DVS2	HDS1	DVS2/VSD2	HDS1
DEMODO PWR ASSY	CN6701	LPA10294*	LPA10294*	PB11087*	PB11087*	PB11078*	PB11078*	
SV REG	R6551, R6552, C6551, C6551	X	X	O	O	O	O	
	C6551, C6552	X	X	X	X	X	X	
DEMODO REG	C6553	33/16	33/16	X	X	X	X	
PASS CON	C6554	X	X	X	X	X	X	
	C6555	0.01	0.01	X	X	X	X	
SW12V	B6607	X	X	X	X	X	X	
	R6508, R6510	0	0	0	0	0	0	
DEMODO OUT	R6509, R6511	X	X	X	X	X	X	
	C6519, C6520	X	X	X	X	X	X	
MUTE	C6501, C6502	X	X	X	X	O	O	
TUNER MONO	B6510	X	X	X	X	X	X	
	R6553, R6554	0	0	X	X	0	0	
	B6552, B6554	X	X	O	O	X	X	
	B6563	X	X	X	X	X	X	
	B6565	X	X	O	O	O	O	
	B6566	O	O	X	X	X	X	
	R6501	X	X	X	X	X	X	

4.7 VIDEO I/O SWITCH SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

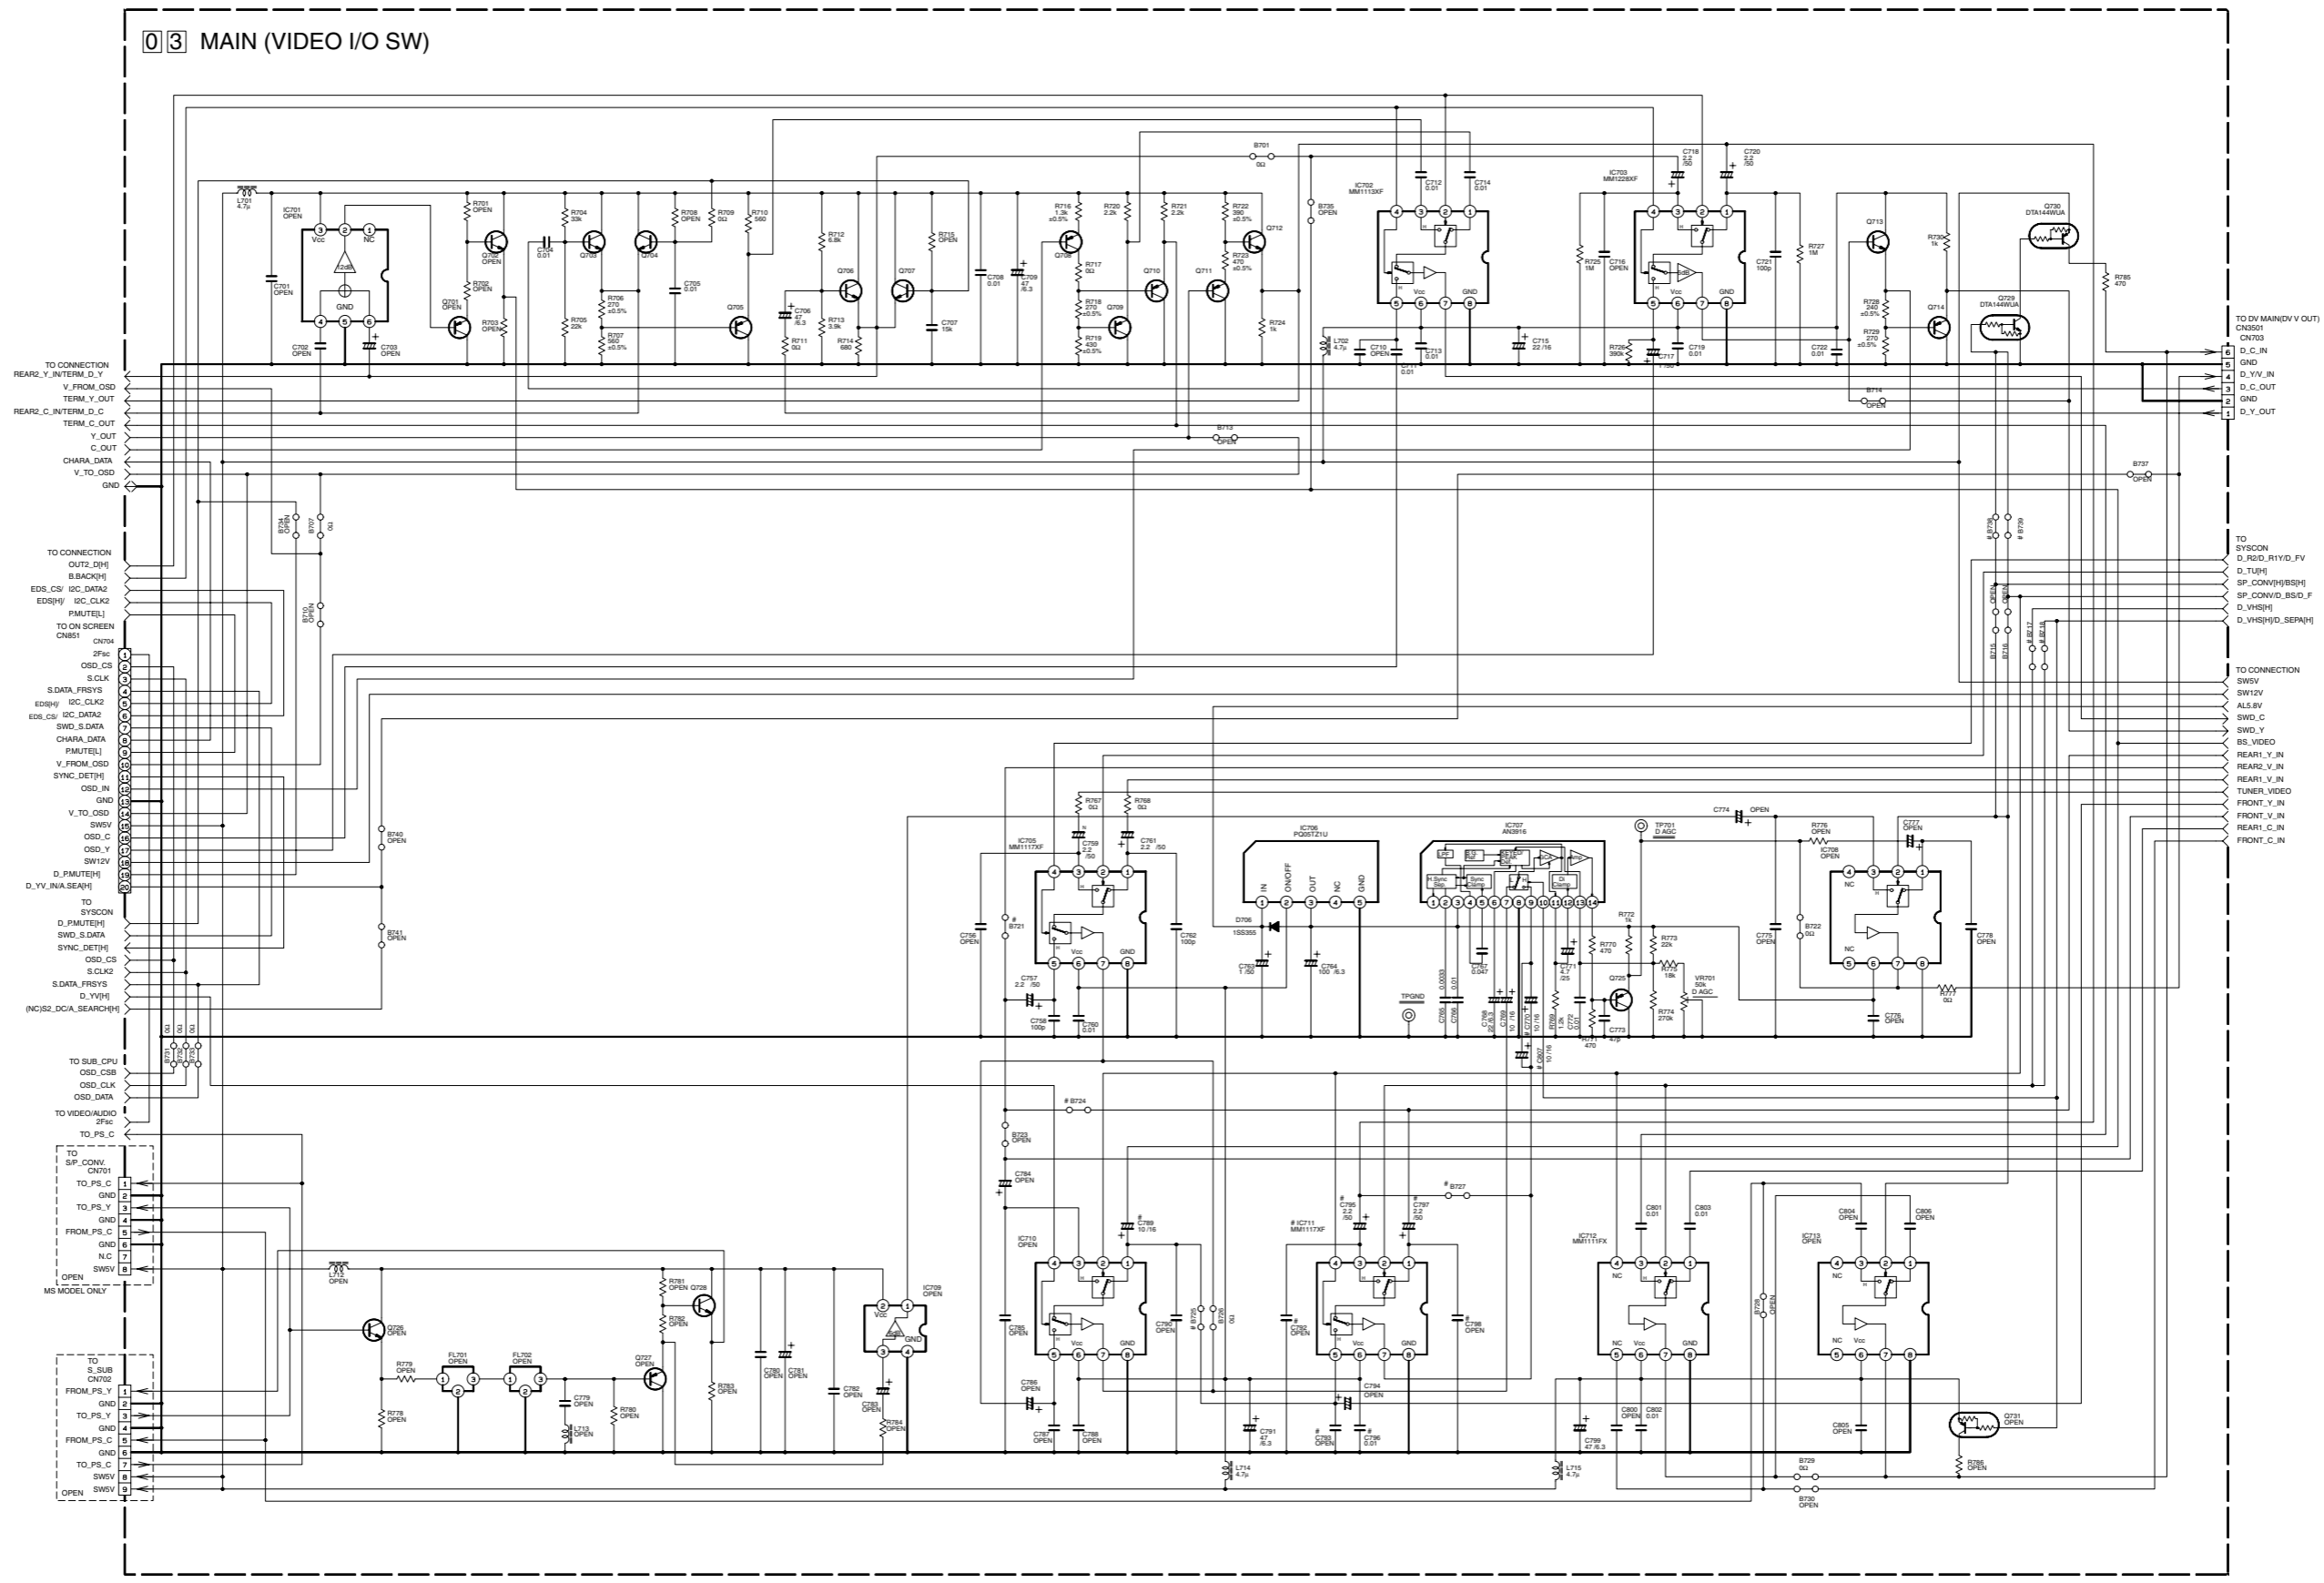

TO CONNECTION REAR_Y_INTERM_D_Y V_FROM_OSD TERM_Y_OUT REAR_C_INTERM_D_C TERM_C_OUT Y_OUT C_OUT CHARA_DATA V_TO_OSD GND

TO CONNECTION OUT2_OPH BBACKPHI EDIS_CSI IC_CLK2 EDISPH IC_CLK2 PMUTEH TO ON SCREEN CNH1 JF4H OSD_CS S_CLK S_DATA_FRSYS EDISPH IC_CLK2 EDIS_CSI IC_CLK2 SWD_S_DATA CHARA_DATA PMUTEH V_FROM_OSD SYNC_DET(H) OSD_IN GND V_TO_OSD SW5V OSD_C OSD_Y SW12V D_PAMUTEH D_YV_INA_SEPH

TO SYSCON D_PAMUTEH SWD_S_DATA SYNC_DET(H) OSD_CS S_CLK2 S_DATA_FRSYS D_YV(H) (NC)S2_DOCI_SEARCH(H)

TO SUB_CPU OSD_CSB OSD_CLK OSD_DATA

TO VIDEO/AUDIO SW6 TO_PS_C

TO SP_CONV CN701 TO_PS_C GND TO_PS_Y GND FROM_PS_C GND N.C. SW5V OPEN MS MODEL ONLY

TO S.SUBI CN702 FROM_PS_Y GND TO_PS_Y GND FROM_PS_C GND TO_PS_C SW5V OPEN SW5V

TO DV MAIN(DV V OUT) CN703 GND D_C_IN GND D_VV_IN D_C_OUT GND D_Y_OUT

TO SYSCON D_PSD_RVID_FV D_TU(H) SP_CONV(B5B) SP_CONV(B5D_F) D_VHS(H) D_VHS(H)SEPA(H)

TO CONNECTION SW5V SW12V ALS.5V SWD_C SWD_Y BS_VIDEO REAR1_Y_IN REAR2_Y_IN REAR1_V_IN TUNER_VIDEO FRONT_Y_IN FRONT_V_IN REAR1_C_IN FRONT_C_IN

DIFFERENCE TABLE


S.NO	IC711	C788, C789, C793, C795, C798, C807	C770
MODEL			
DOM	O		X
US	X		O

NOTES: UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN P.F.

ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR

4.8 AUDIO I/O SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

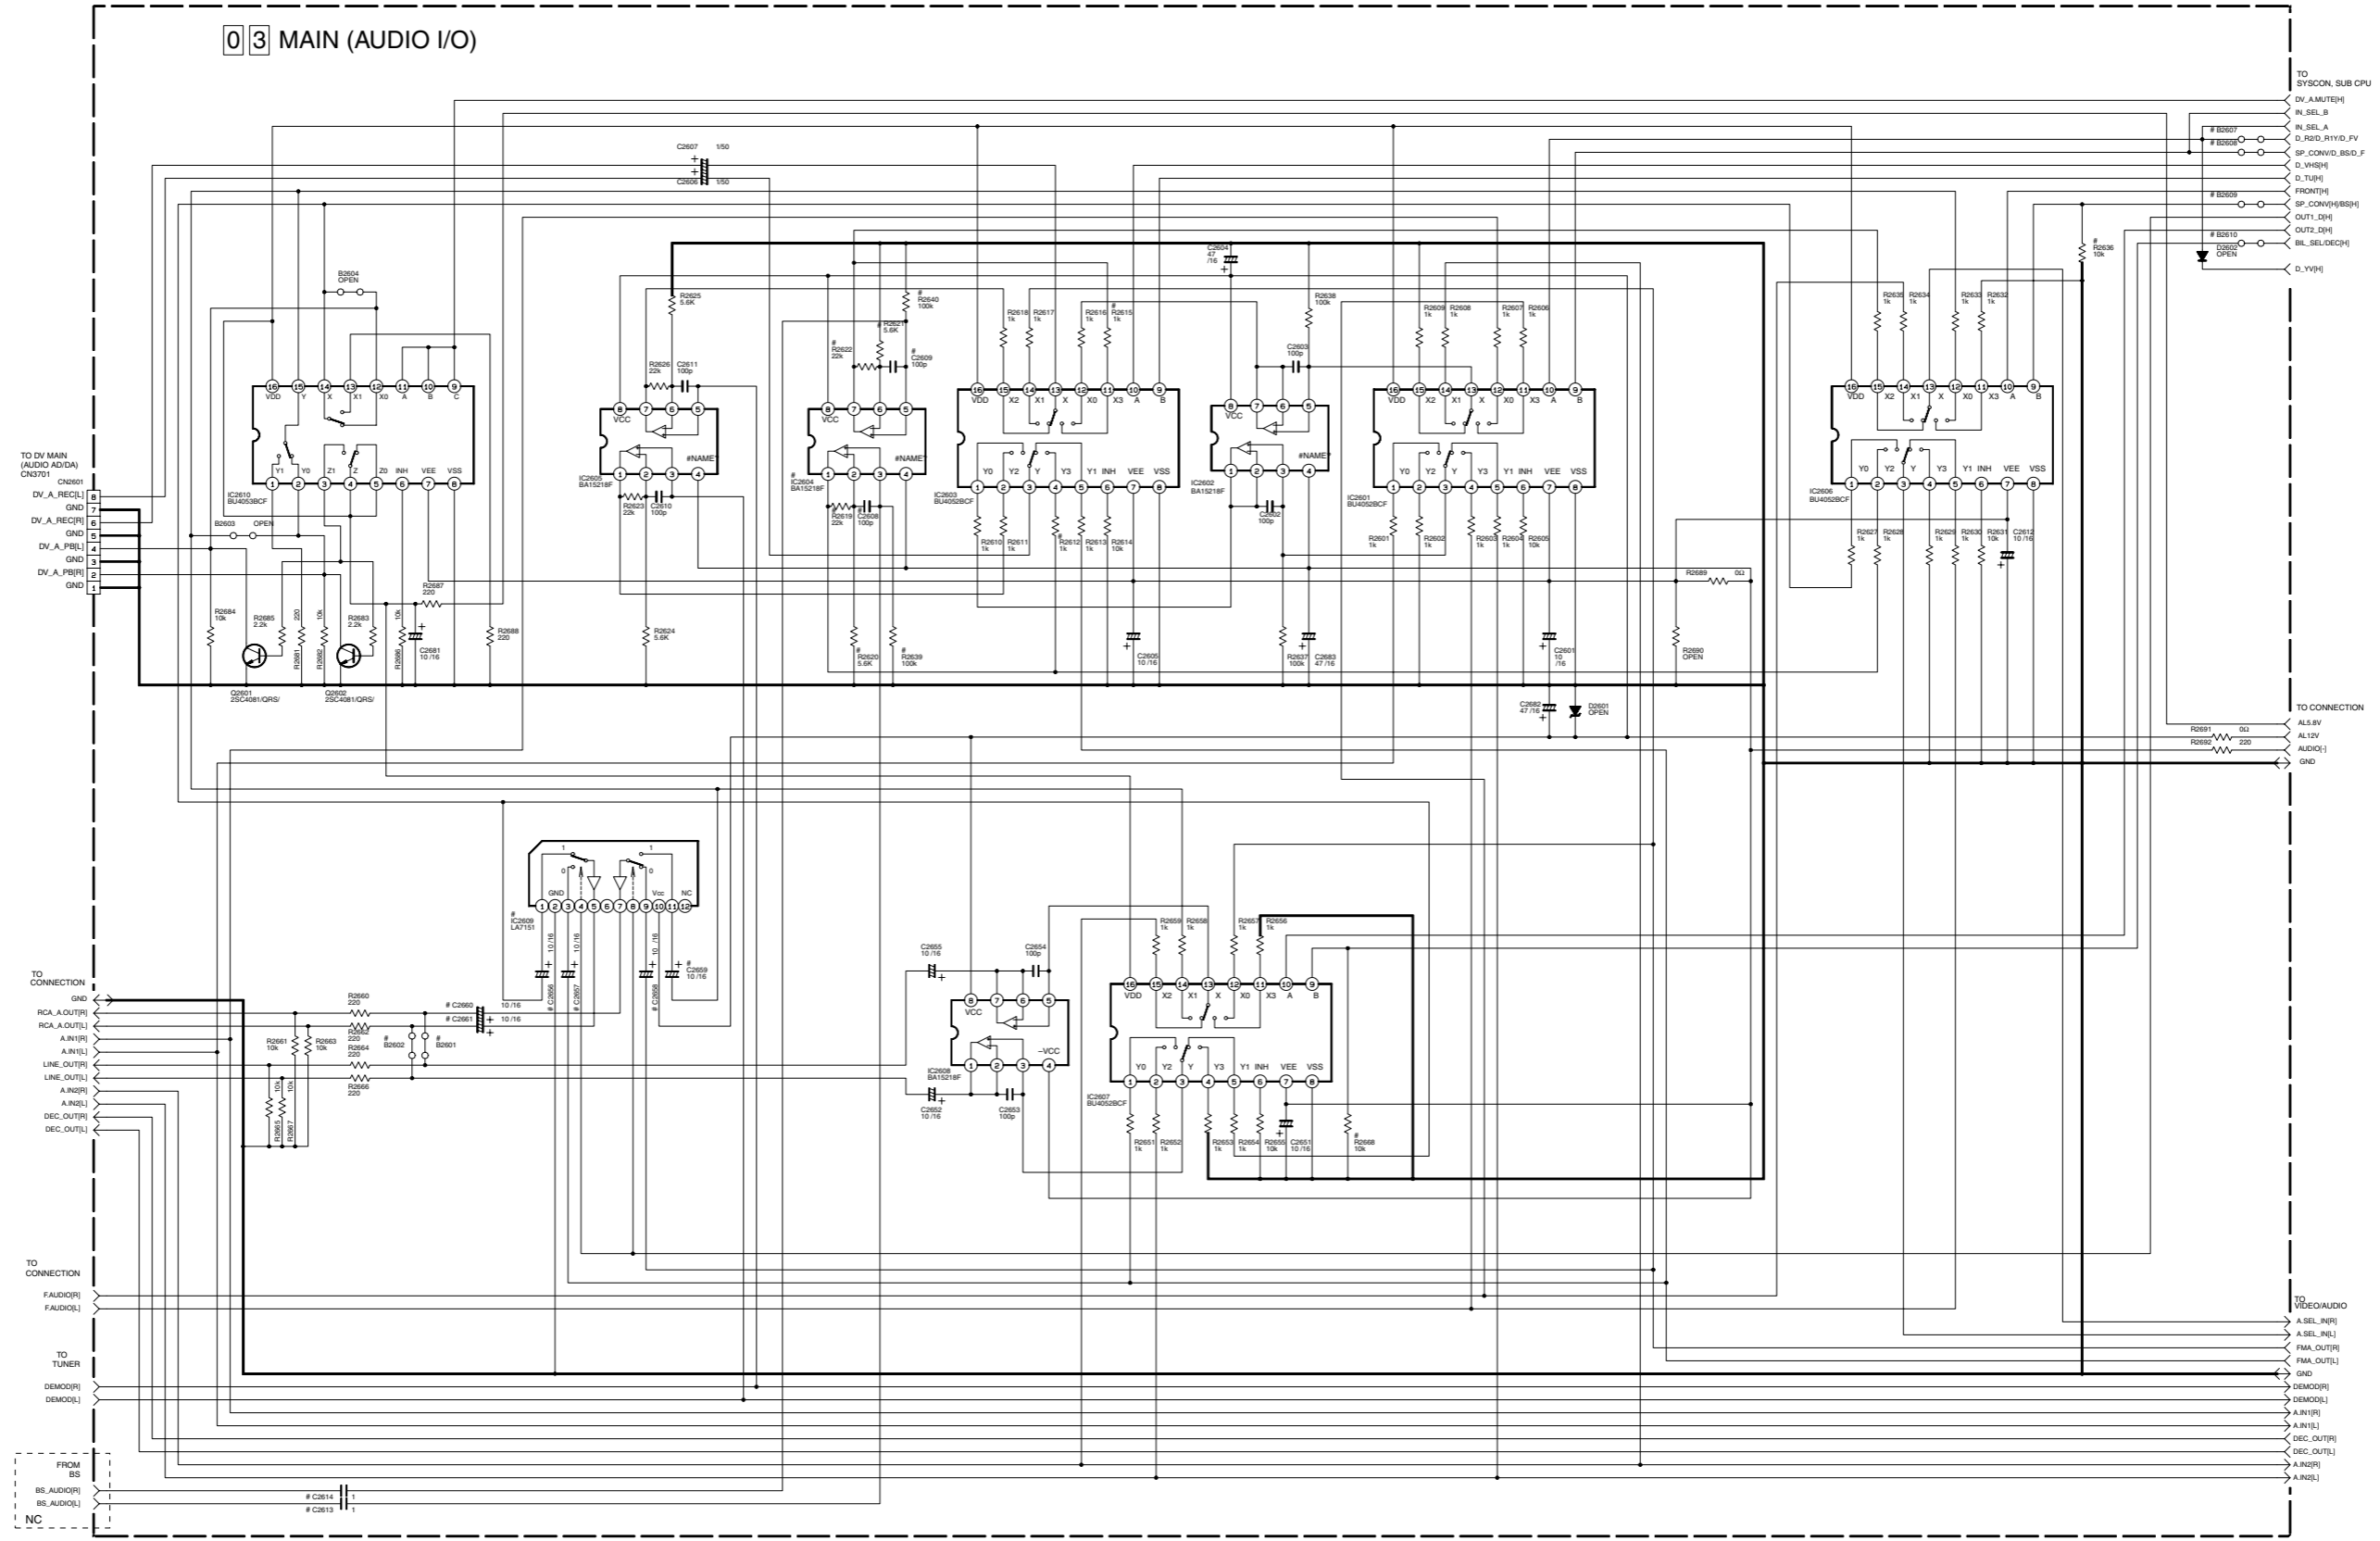

p10336001a_rev0

DIFFERENCE TABLE


SYMBOL	MODEL	SYMBOL	MODEL	SYMBOL	MODEL
B2601, B2602	B2607, B2608	C2609	C2604, C2601	IC2604	R2612, R2615
With DVC	X	O		With BS	O
With HDD	O	X		With BS	X

NOTES: UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

4.9 CONNECTION SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

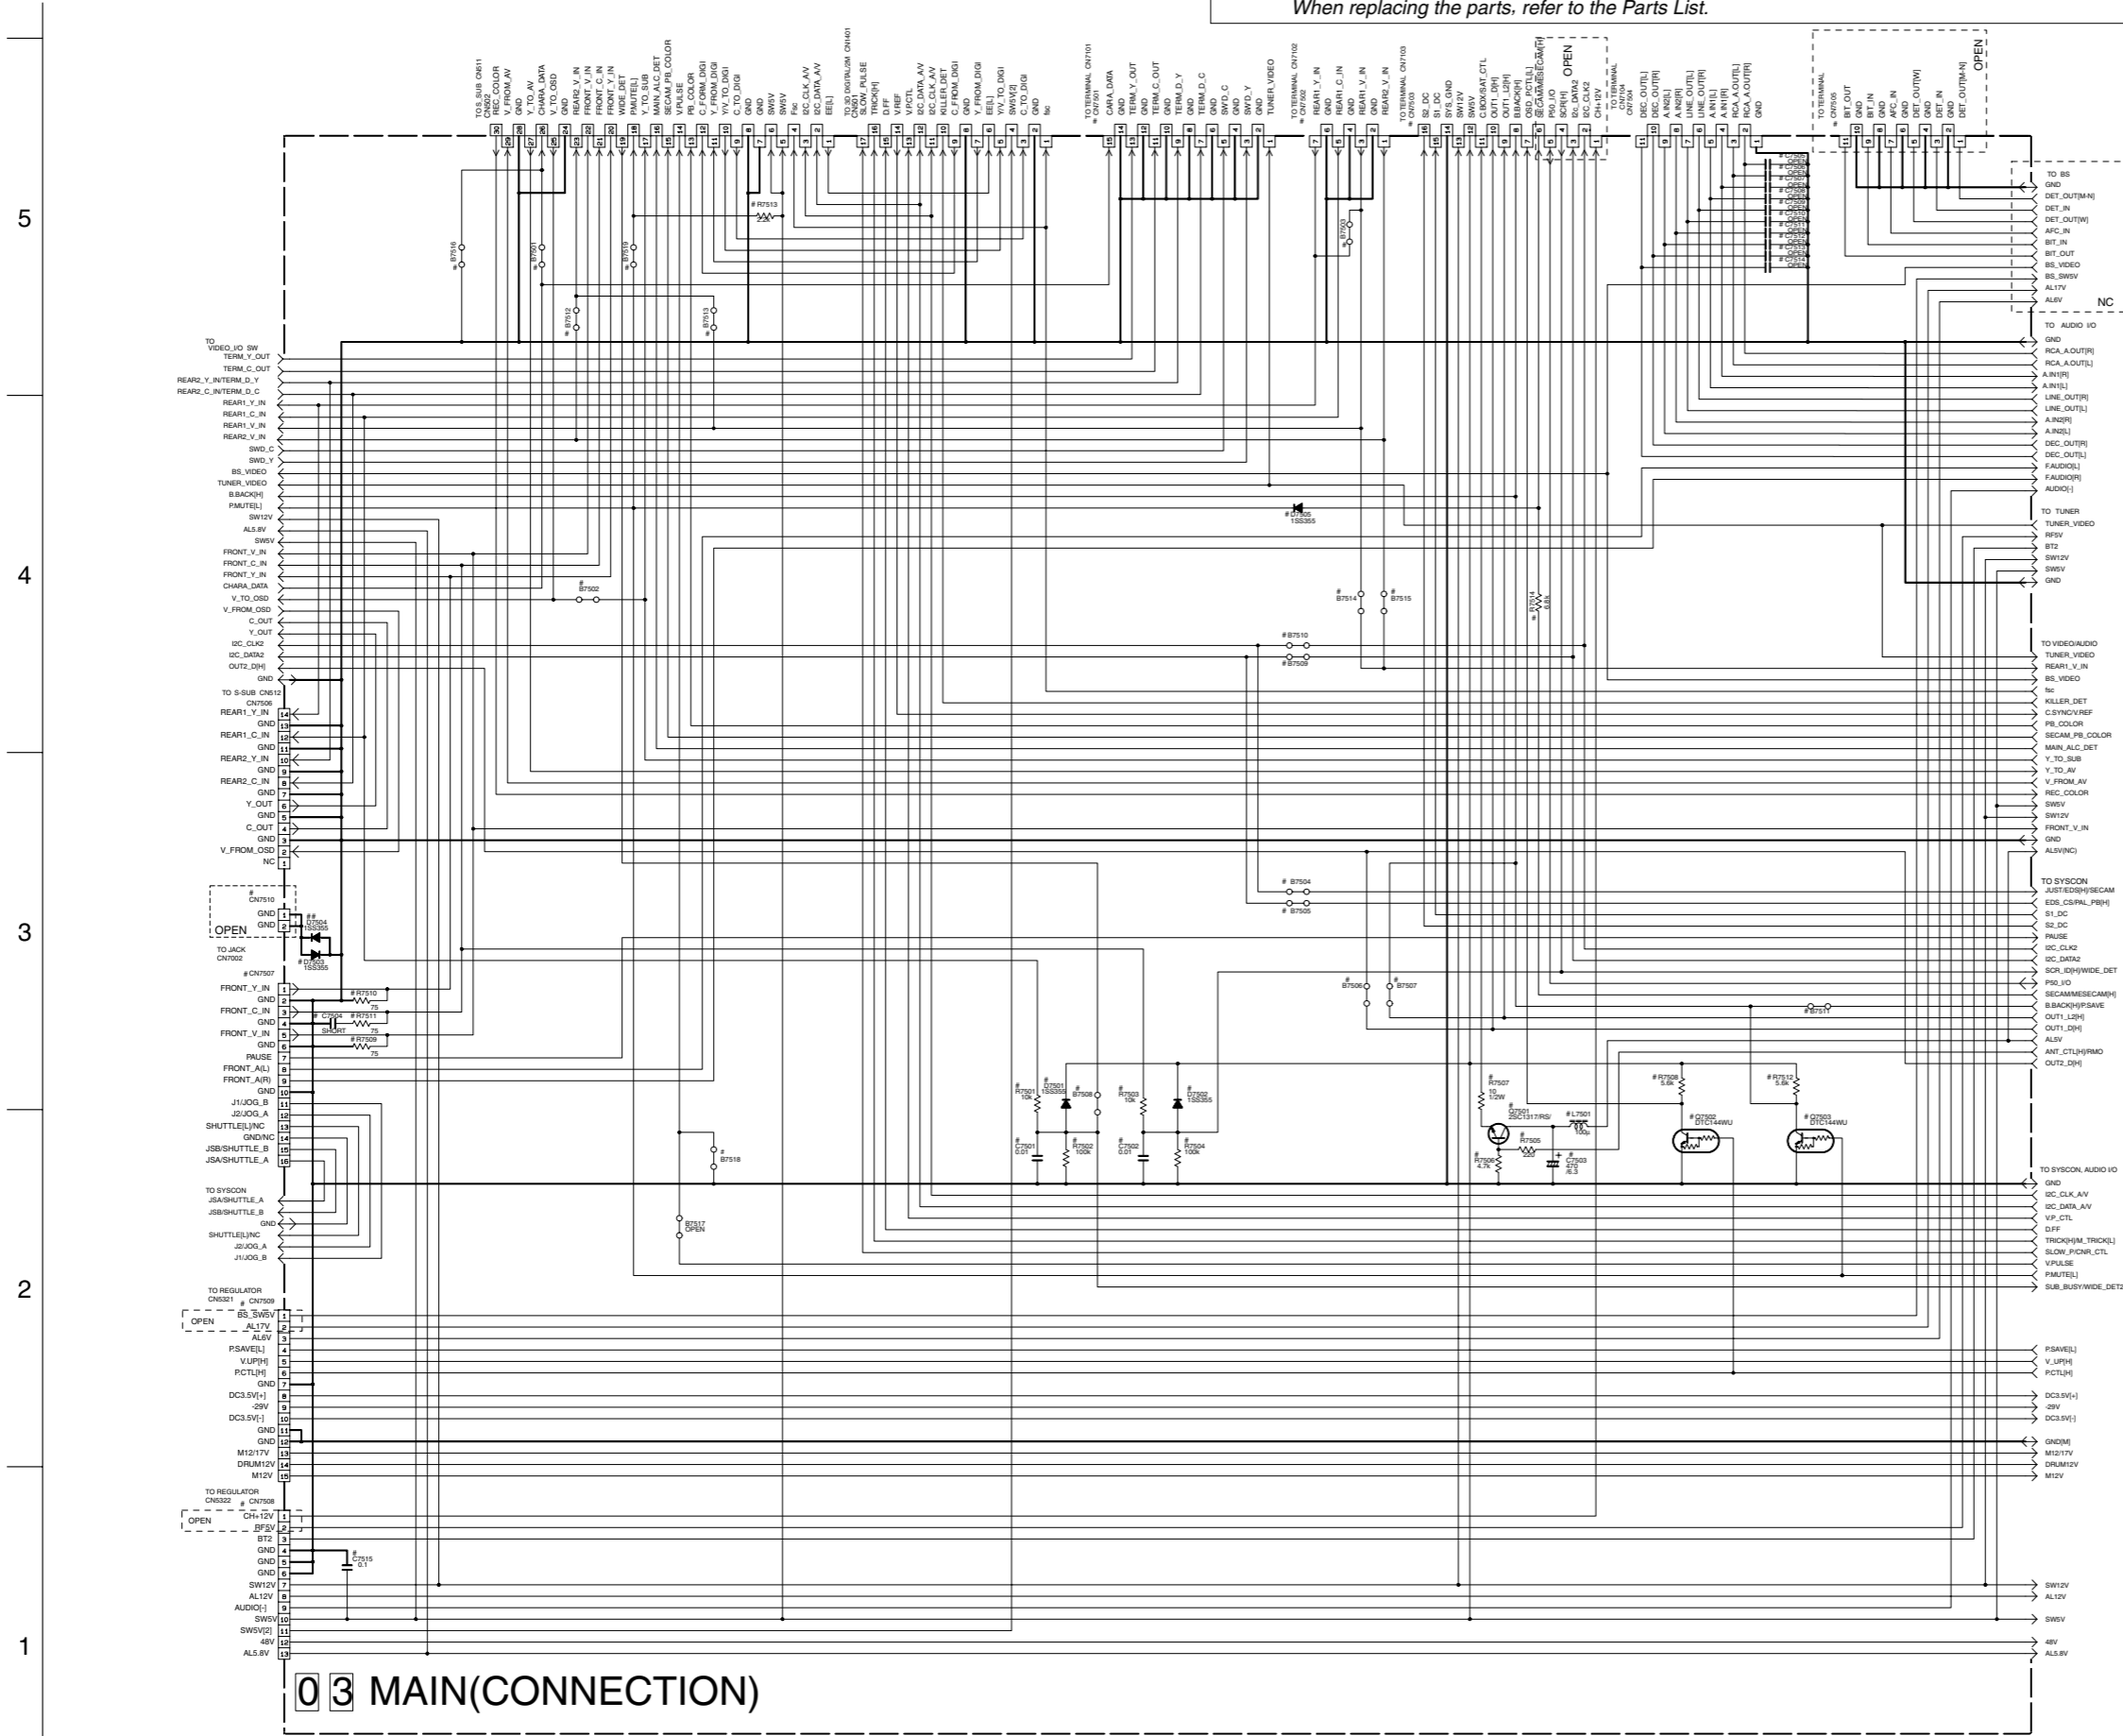

03 MAIN(CONNECTION)

p10308001a_rev0

DIFFERENCE TABLE

○ Used
× Not used


	DV52/V520	EU	EK	MS	DOM	US	HM-H051	DOM	US
B7501	X	X	X	X	X	X	○		
B7502	X	X	X	X	X	X	X	X	X
B7503	○	○	○	○	○	○	X	X	X
B7504	X	X	X	X	X	○	X		
B7505	X	X	X	X	X	X	X	X	X
B7506	X	X	X	X	X	X	X	X	X
B7507	X	X	X	X	X	X	X	X	X
B7508	X	X	X	X	X	○	X	X	X
B7509	○	○	○	○	X	X	X	X	X
B7510	○	○	○	○	X	X	X	X	X
B7511	○	○	○	○	○	○	X	X	X
B7512	○	○	○	○	X	X	X	X	X
B7513	X	X	X	X	○	○	○	○	○
B7514	○	○	○	○	X	X	X	X	X
B7515	X	X	X	X	○	○	○	○	○
B7516	○	○	○	○	○	○	○	○	○
B7517	X	X	X	X	X	X	X	X	X
B7518	○	○	○	○	○	○	○	○	○
B7519	X	X	X	X	○	○	○	○	○
B7513	○	○	○	○	X	X	X	X	X
R7501									
R7502									
R7503									
R7504									
C7501	X	X	X	X	X	X	○		
C7502									
D7501									
D7502									
C7505	X	X	X	X	X	X	X	X	X
-C7514	X	X	X	X	X	X	○	○	○
C7515	X	X	X	X	X	X	○	○	○
Q7501									
R7505									
R7506									
R7507	○	○	○	○	X	○	○	X	
L7501									
C7503									
R7508	○	○	○	○	○	○	○	X	
Q7502									
R7512	X	X	X	X	X	X	○		
Q7503									
R7509									
R7510									
R7511	X	X	X	X	X	X	X	X	X
C7504									
CN7510	X	X	X	X	X	X	X	X	X
D7503									
CN7501	1-16	1-16	1-16	3-15	3-15	3-15	3-6		
CN7502	1-5	1-5	1-5	1-7	1-7	1-7	1-7		
CN7503	1-14	1-14	1-14	7-16	7-16	8-15			
CN7505	X	X	X	X	1-11	X	1-11		
CN7507	1-16	1-16	1-16	1-16	1-16	1-16	1-10		
CN7508	1-13	1-13	1-13	3-13	3-13	3-13	3-13		
CN7509	3-15	3-15	3-15	1-15	3-15	1-15			
D7505	○	○	○	○	X	X	X	X	X
R7514	○	○	○	○	X	X	X	X	X

Marked elements may differ depending on the model. Be sure to check the Parts List.

NOTES: UNLESS OTHERWISE SPECIFIED:
ALL RESISTANCE VALUES ARE IN OHMS.
ALL INDUCTANCE VALUES ARE IN H.
ALL CAPACITANCE VALUES ARE IN μF.

RESISTOR
 CAPACITOR
 DIODE
 MYLER
 CERAMIC
 ELECTROLYTIC
 NON POLAR

4.10 3D DIGITAL / 4M SCHEMATIC DIAGRAM

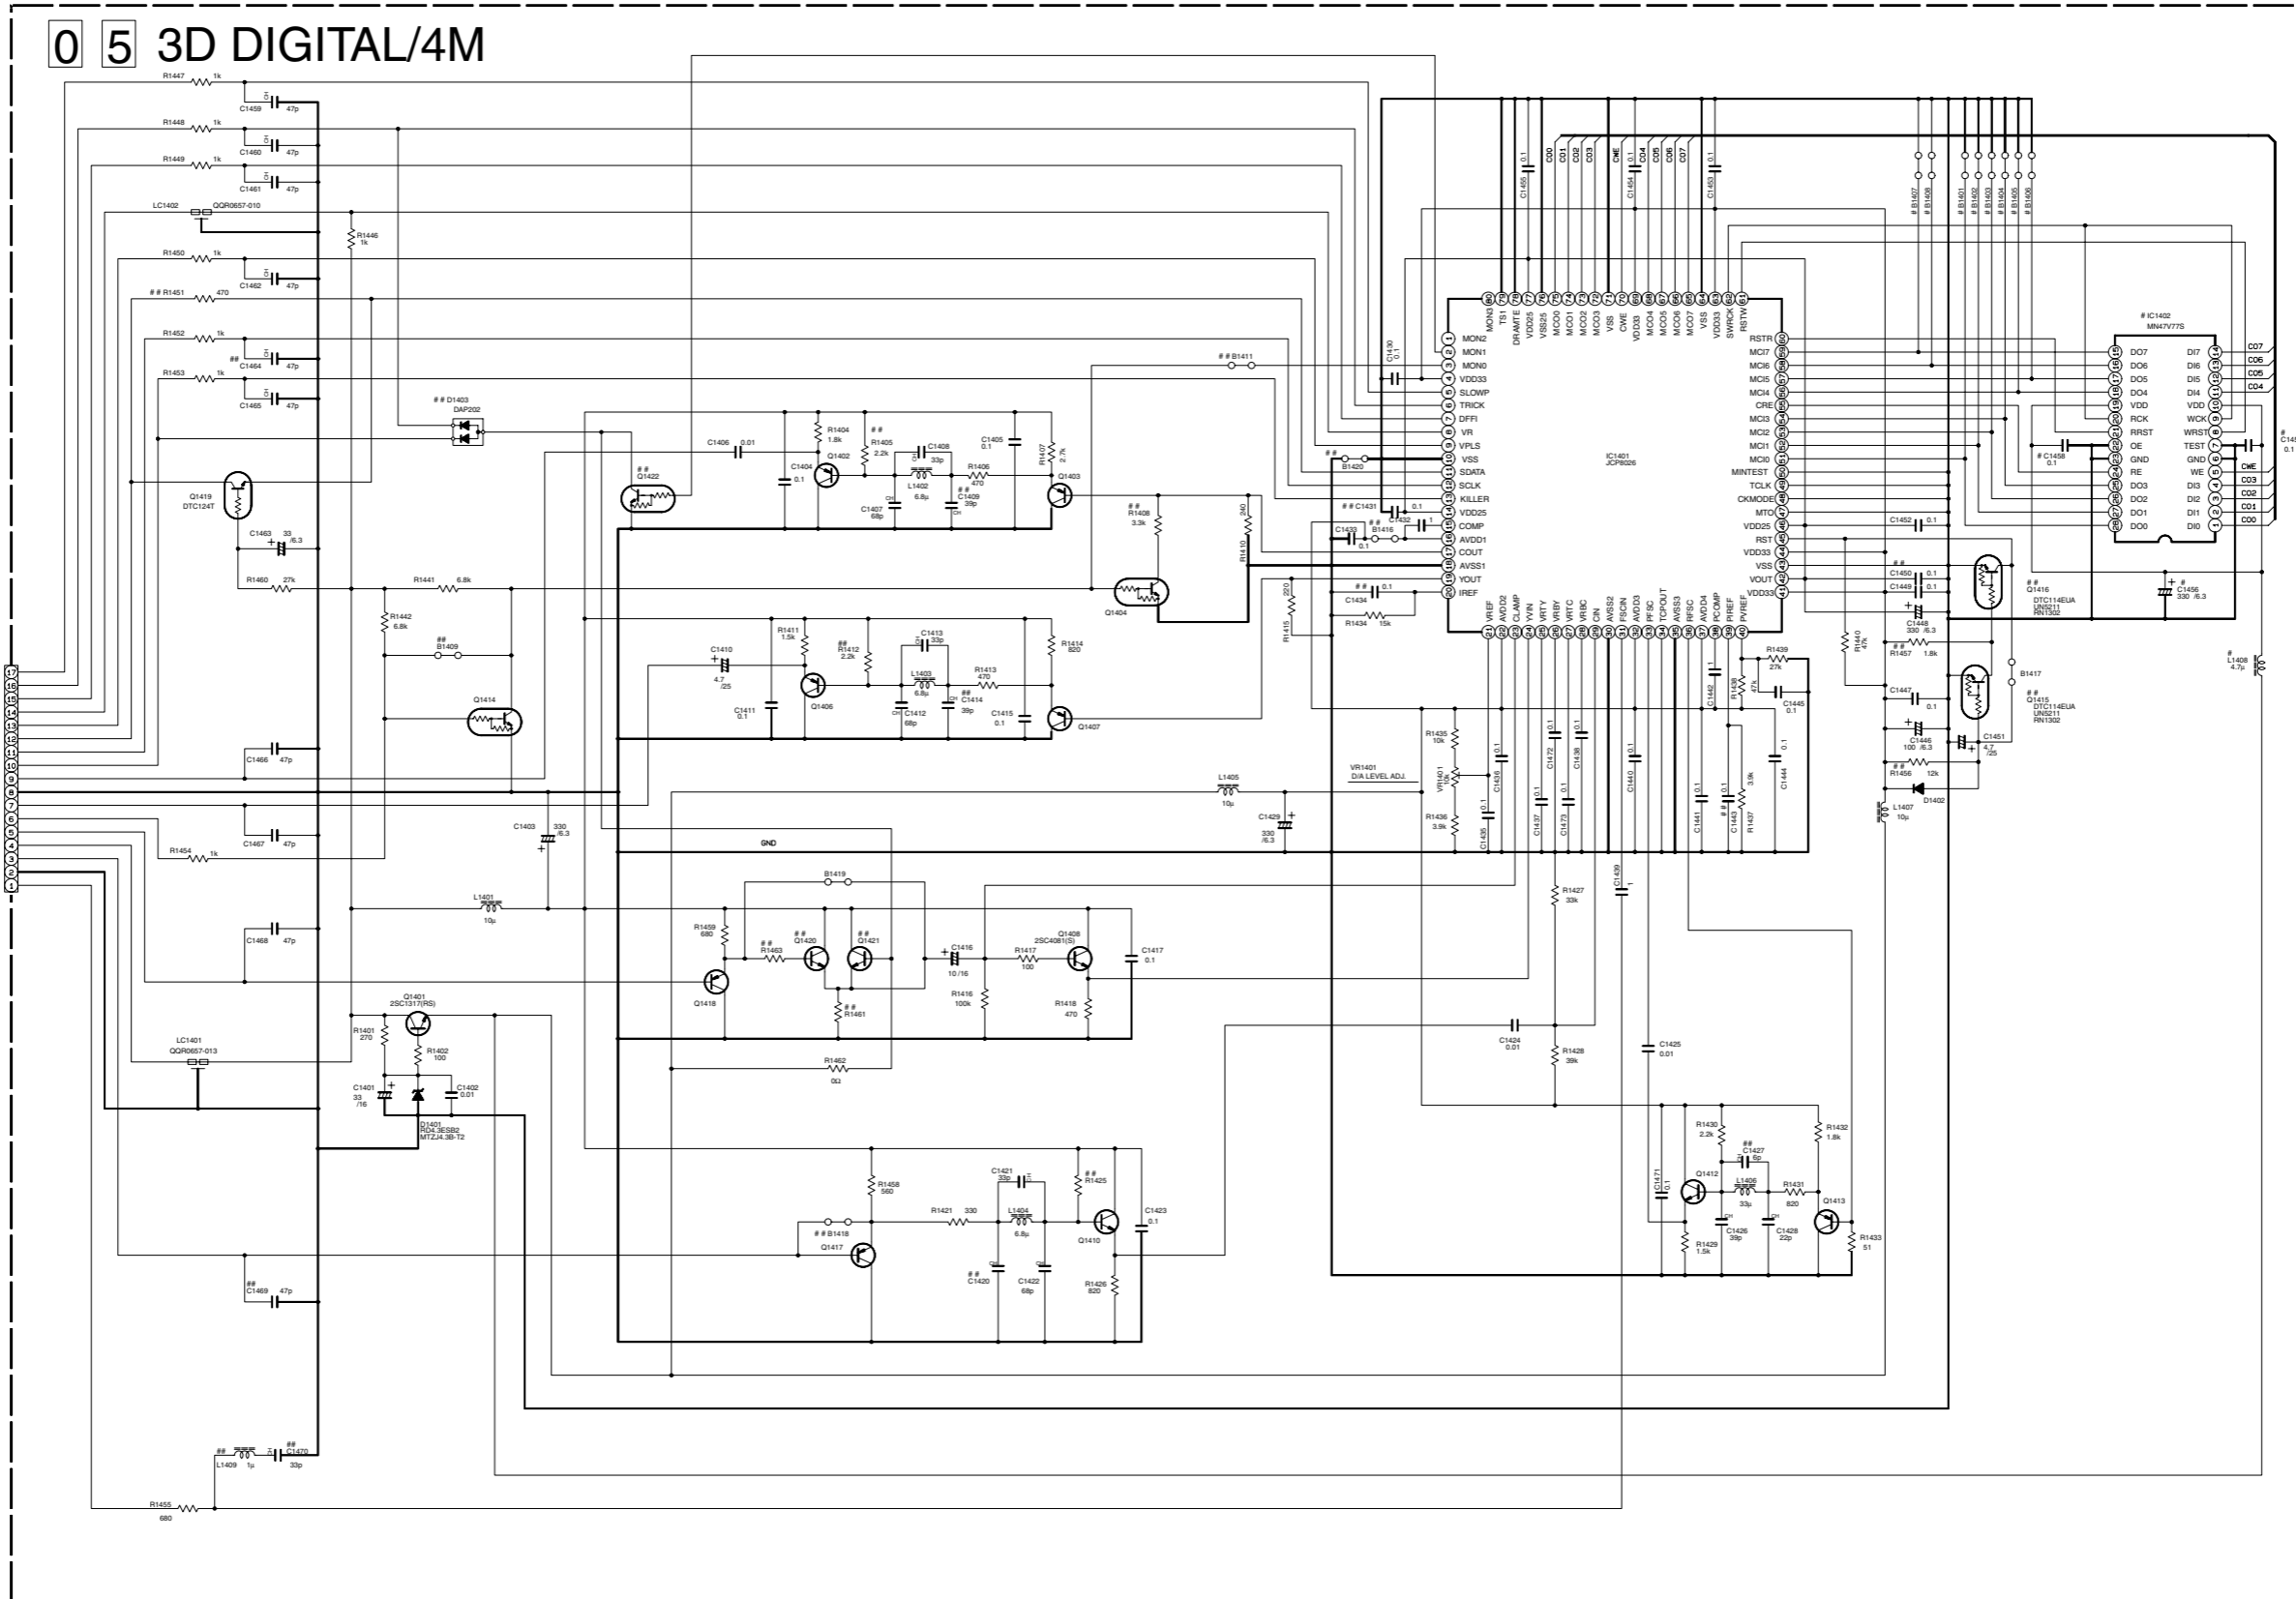

p10277001a_rev1

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μ F.


MARK ELEMENTS ARE NOT MOUNTED.
 ALL DIODES ARE 1SS133 OR 1N4148
 ALL PNP TYPE TRANSISTORS ARE 2SA1576A(QR) OR 2PA1576
 ALL NPN TYPE TRANSISTORS ARE 2SC4081(QRS) OR 2PC4081
 ALL NPN TYPE DIGITAL TRANSISTORS ARE DTC1449WA OR UN2E1E OR RN1309

DIFFERENCE TABLE

SYSTEM	IC1402, L1408 C1405, C1407, C1408	B1401-B1406
4M	○	×
3M	×	○

4.11 TERMINAL SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

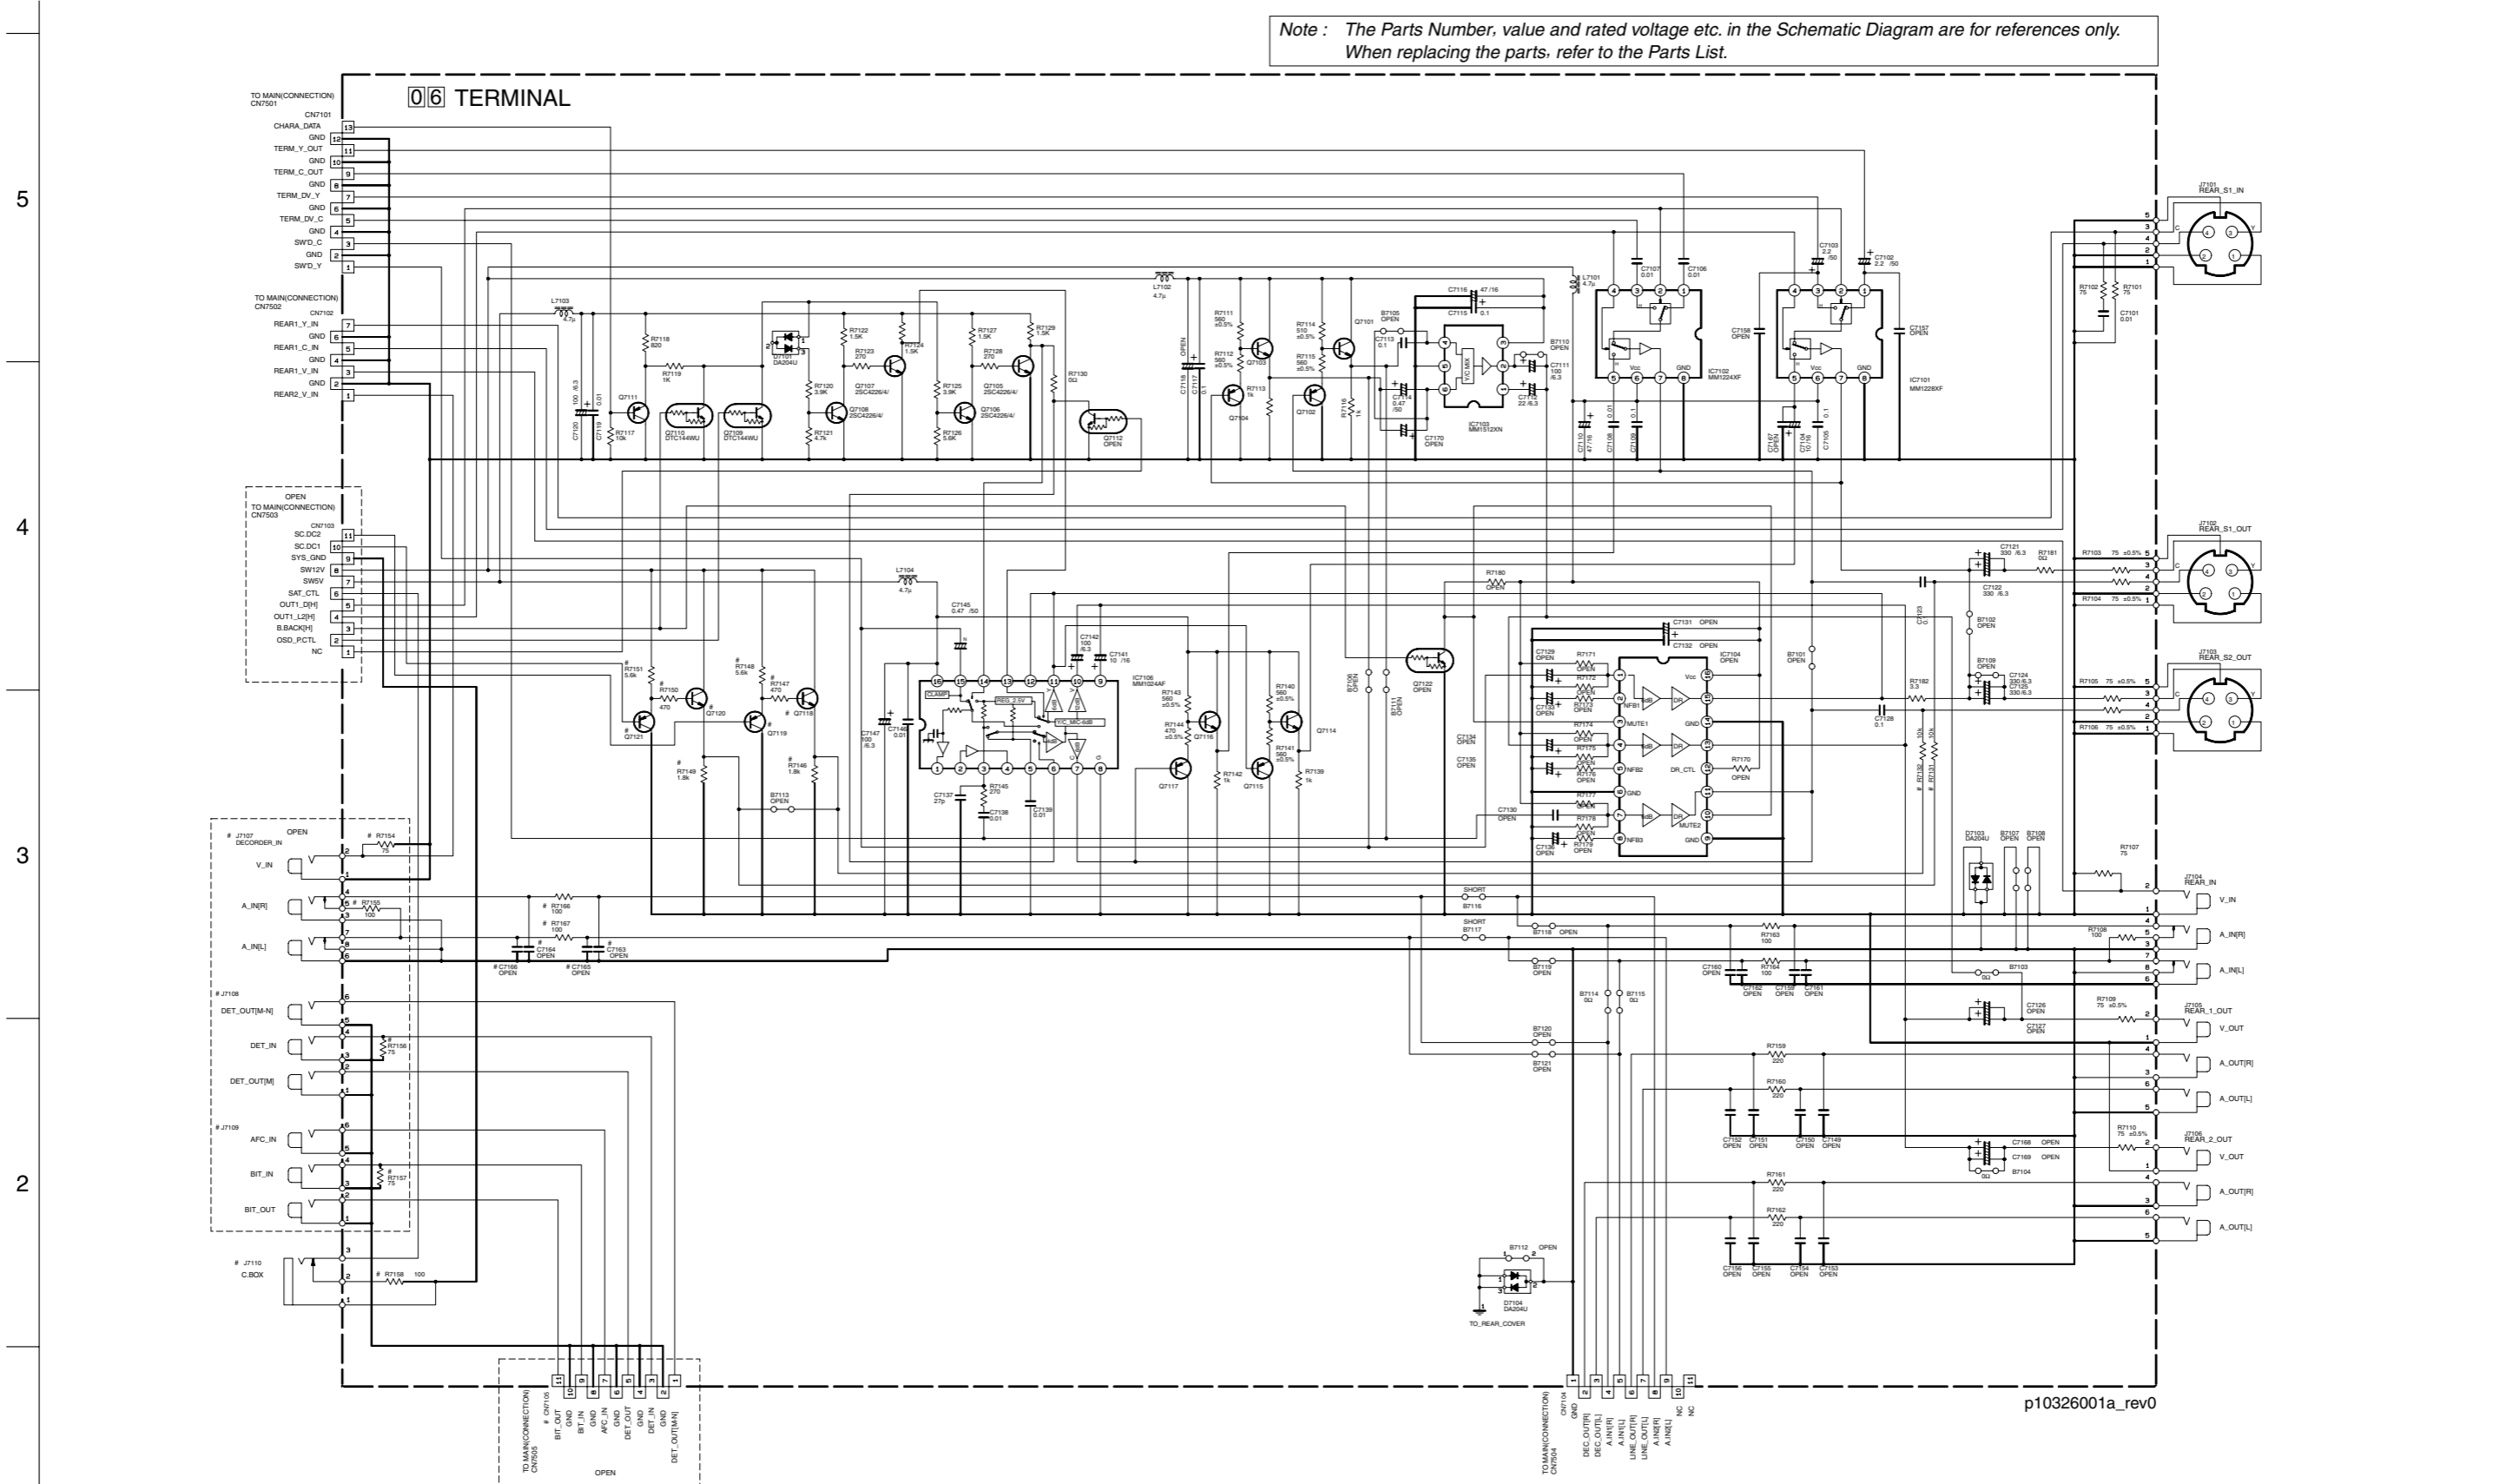


p10326001a_rev0

REFERENCE TABLE

	O : Used	X : Not used
Q7118 Q7121	O	X
R7118 R7121 R7148 R7151	O	X
R7154 R7155 R7156 R7157	X	O
C7105 C7106	O	X
J7107 J7108	X	O

NOTES UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.
 ALL PNP TYPE TRANSISTORS ARE 2SA1575(OR).
 ALL NPN TYPE TRANSISTORS ARE 2SC4081(OR).
 ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR

4.12 DEMODULATOR SCHEMATIC DIAGRAM

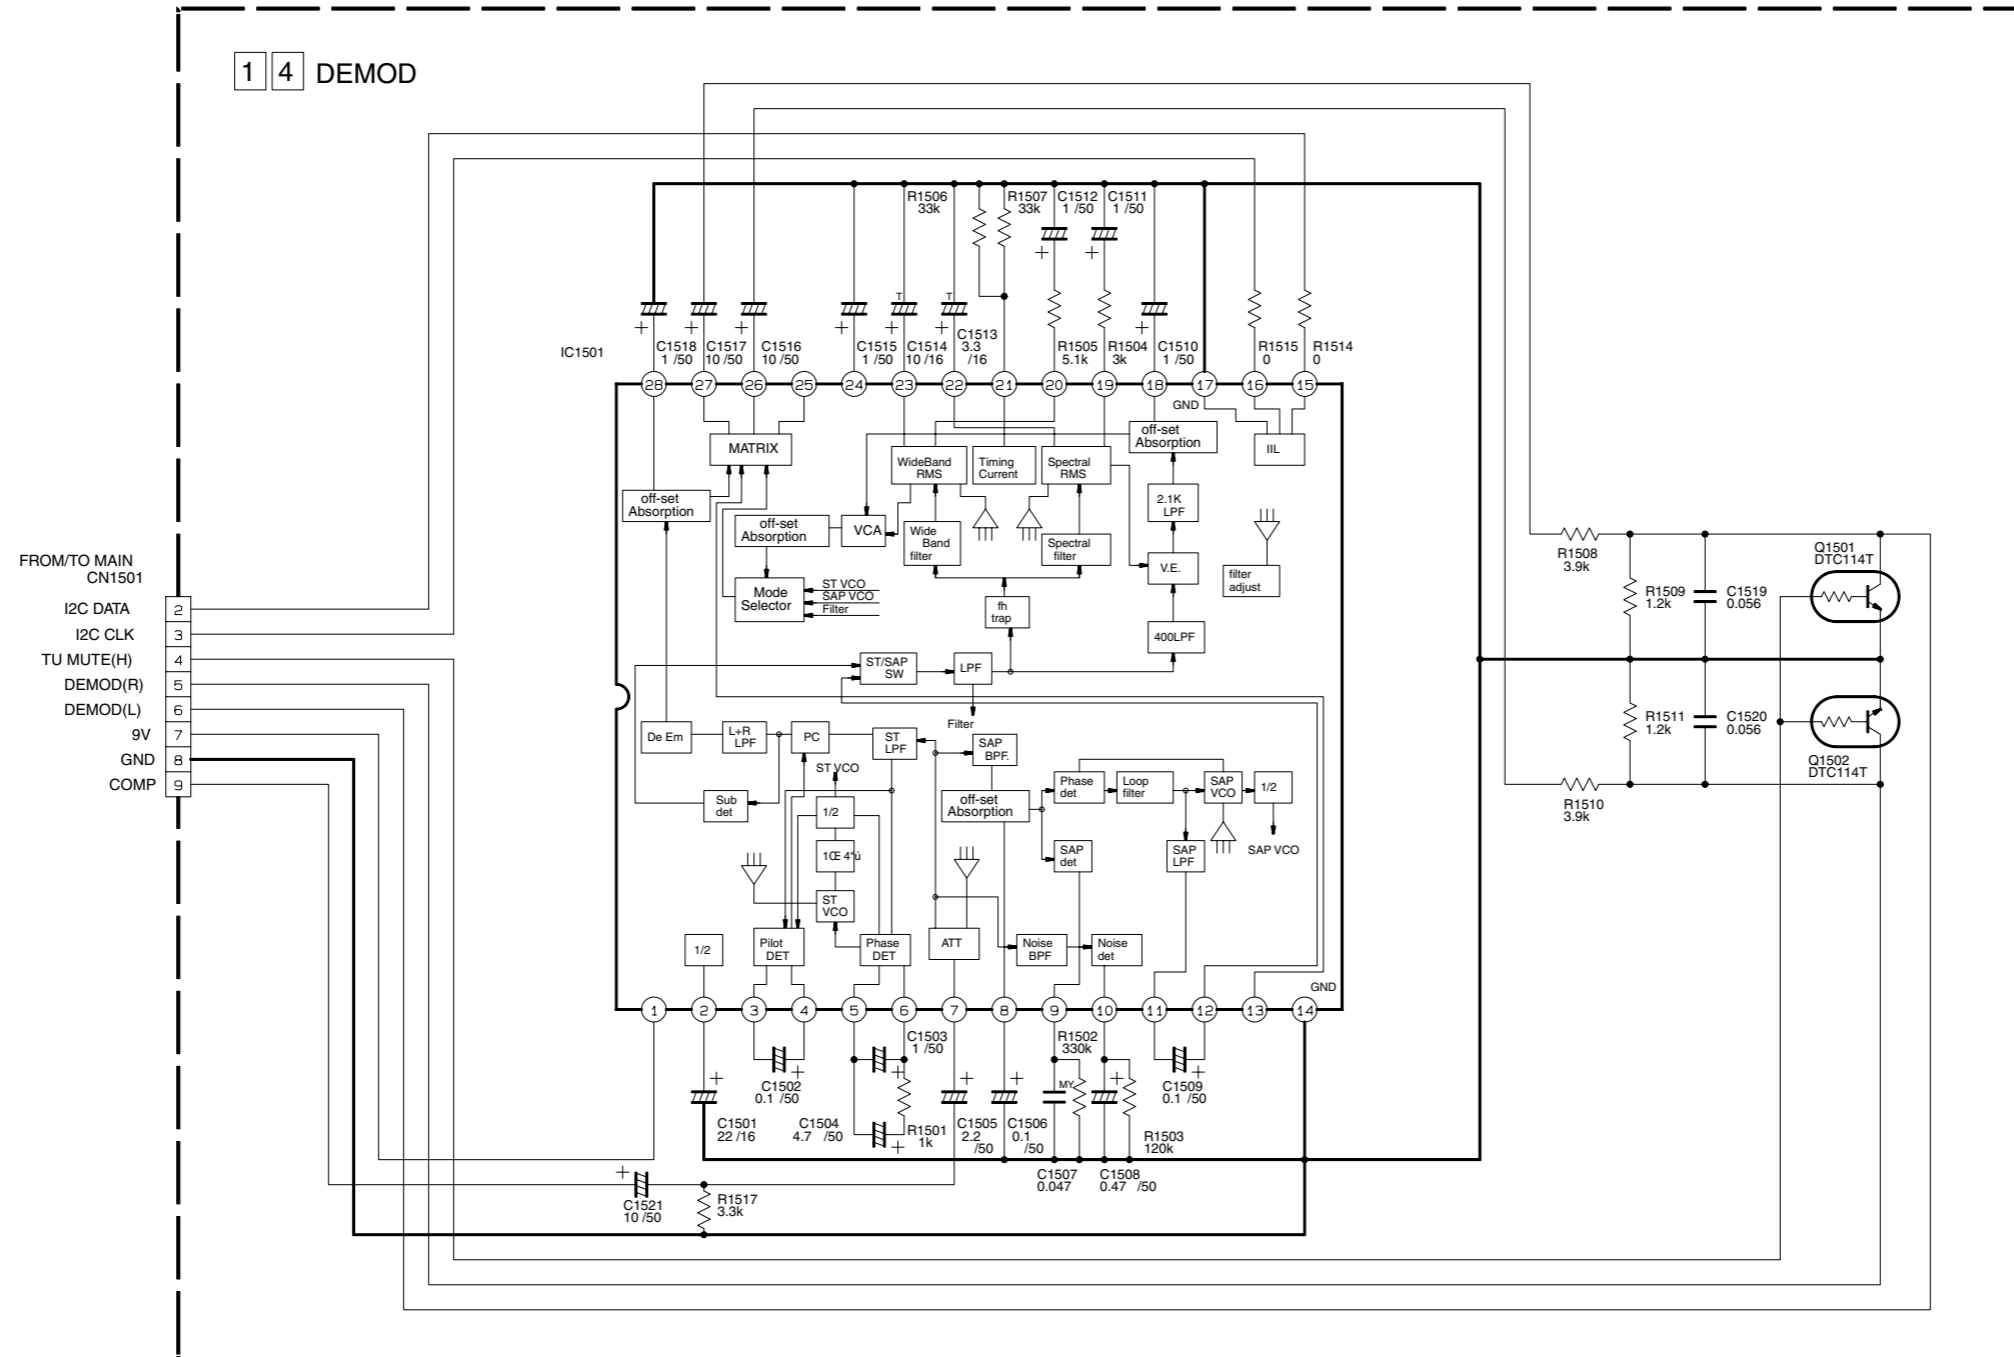

p97596_rev0

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

- ELECTROLYTIC
- CERAMIC
- TANTALUM


5
4
3
2
1

A B C D 4-27 4-28 E F G H

4.13 S-SUB SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

1 5 S-SUB

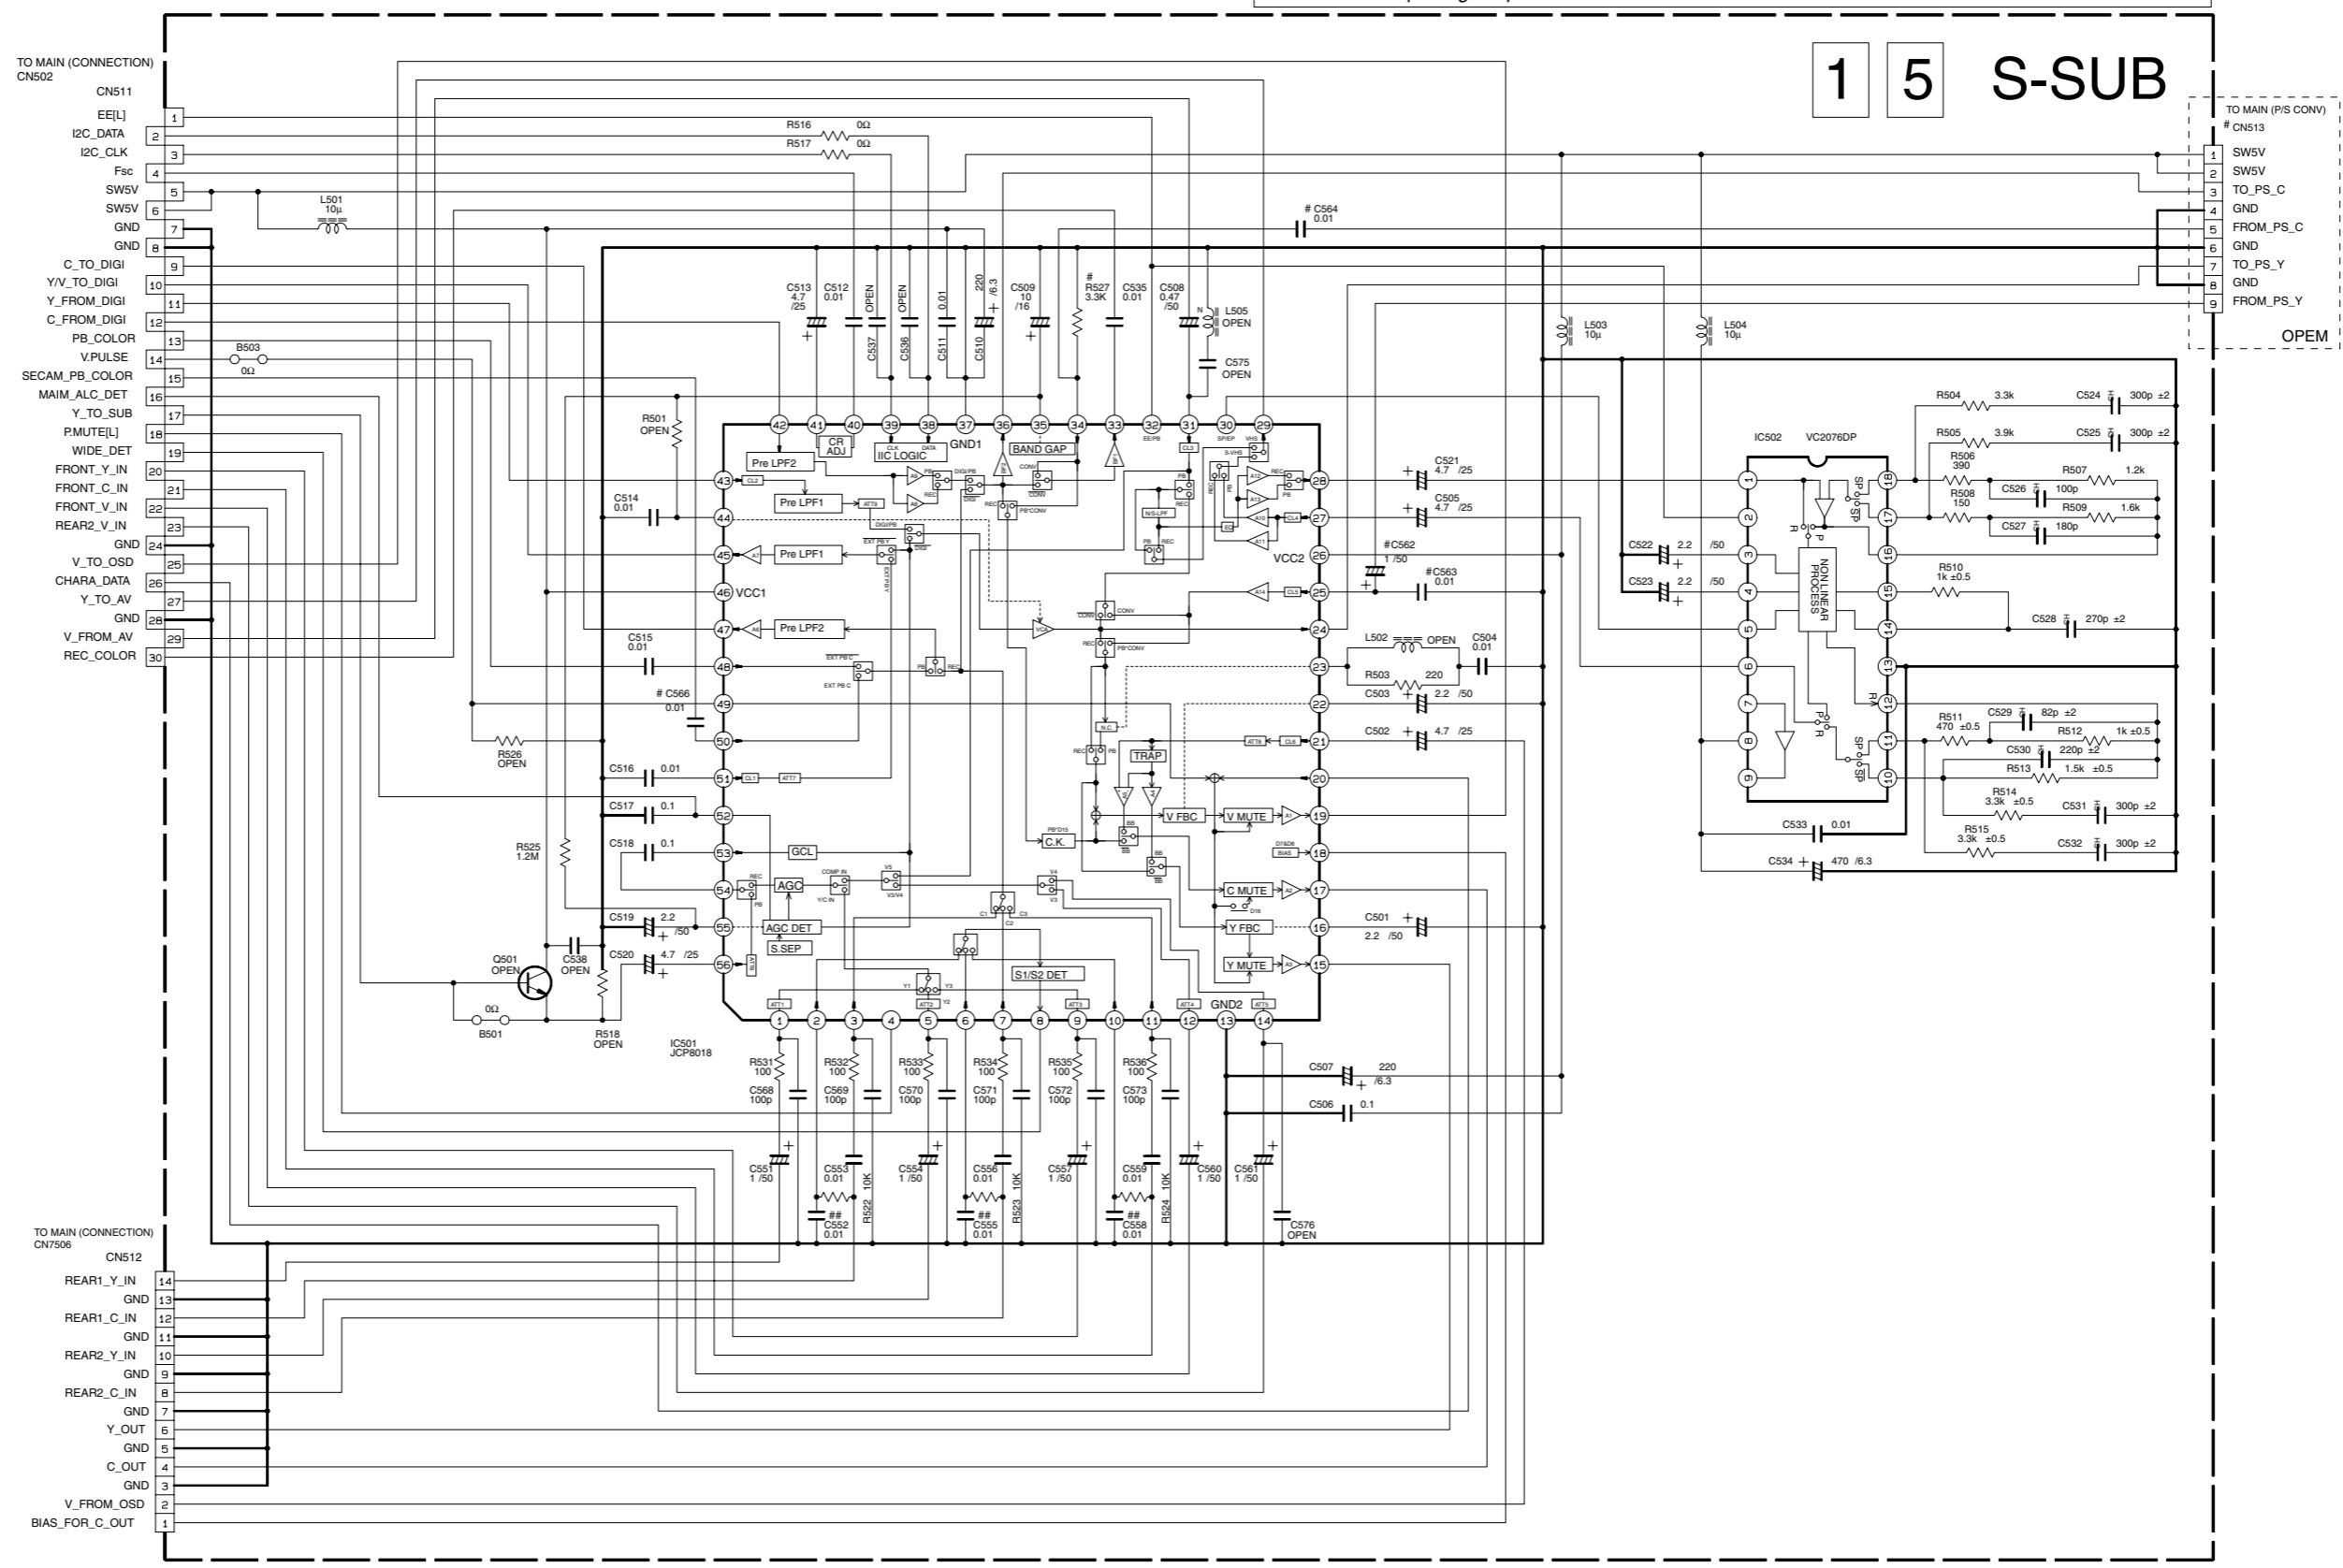

p20168001a_rev0

DIFFERENCE TABLE

	○ Used	× Not used
MS	○	×
OTHERS	×	○


Marked elements may differ depending on the model. Be sure to check the Parts List.

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

- ⊥ ELECTROLYTIC
- CERAMIC
- MYLER
- NON POLAR

4.14 MDA SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

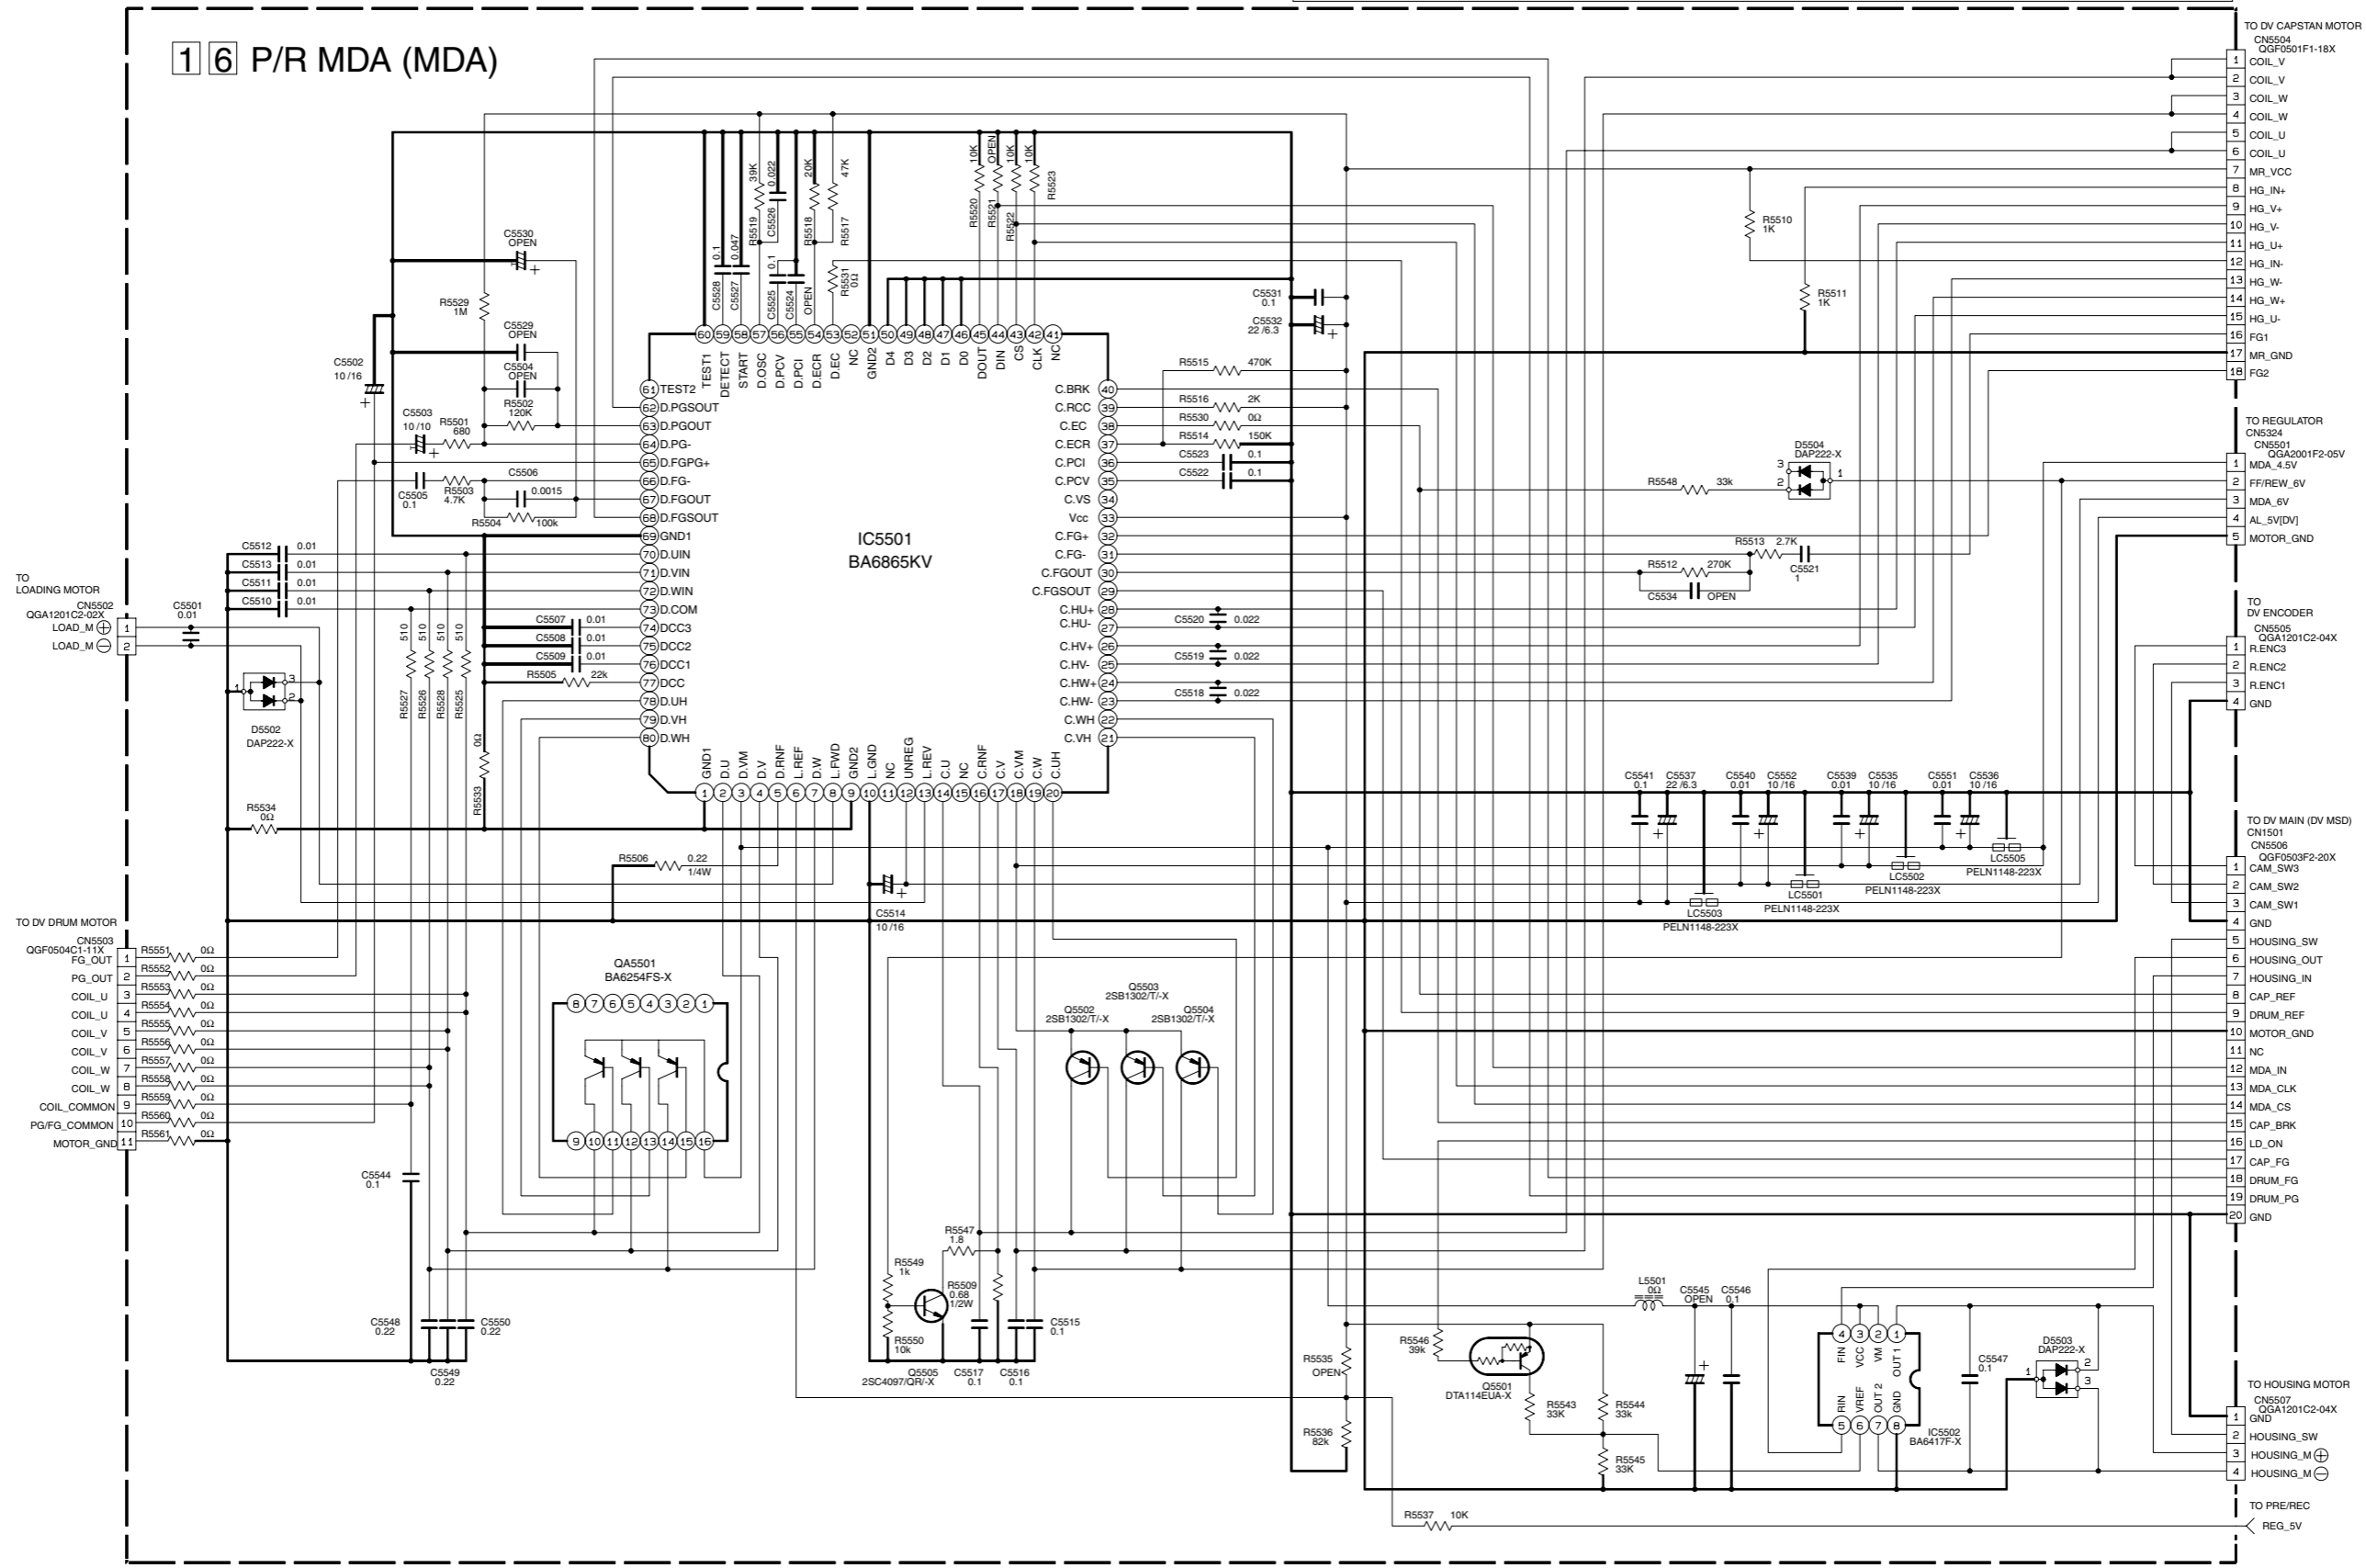


NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μ F.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

p20172001a_rev0

4.15 PRE / REC SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

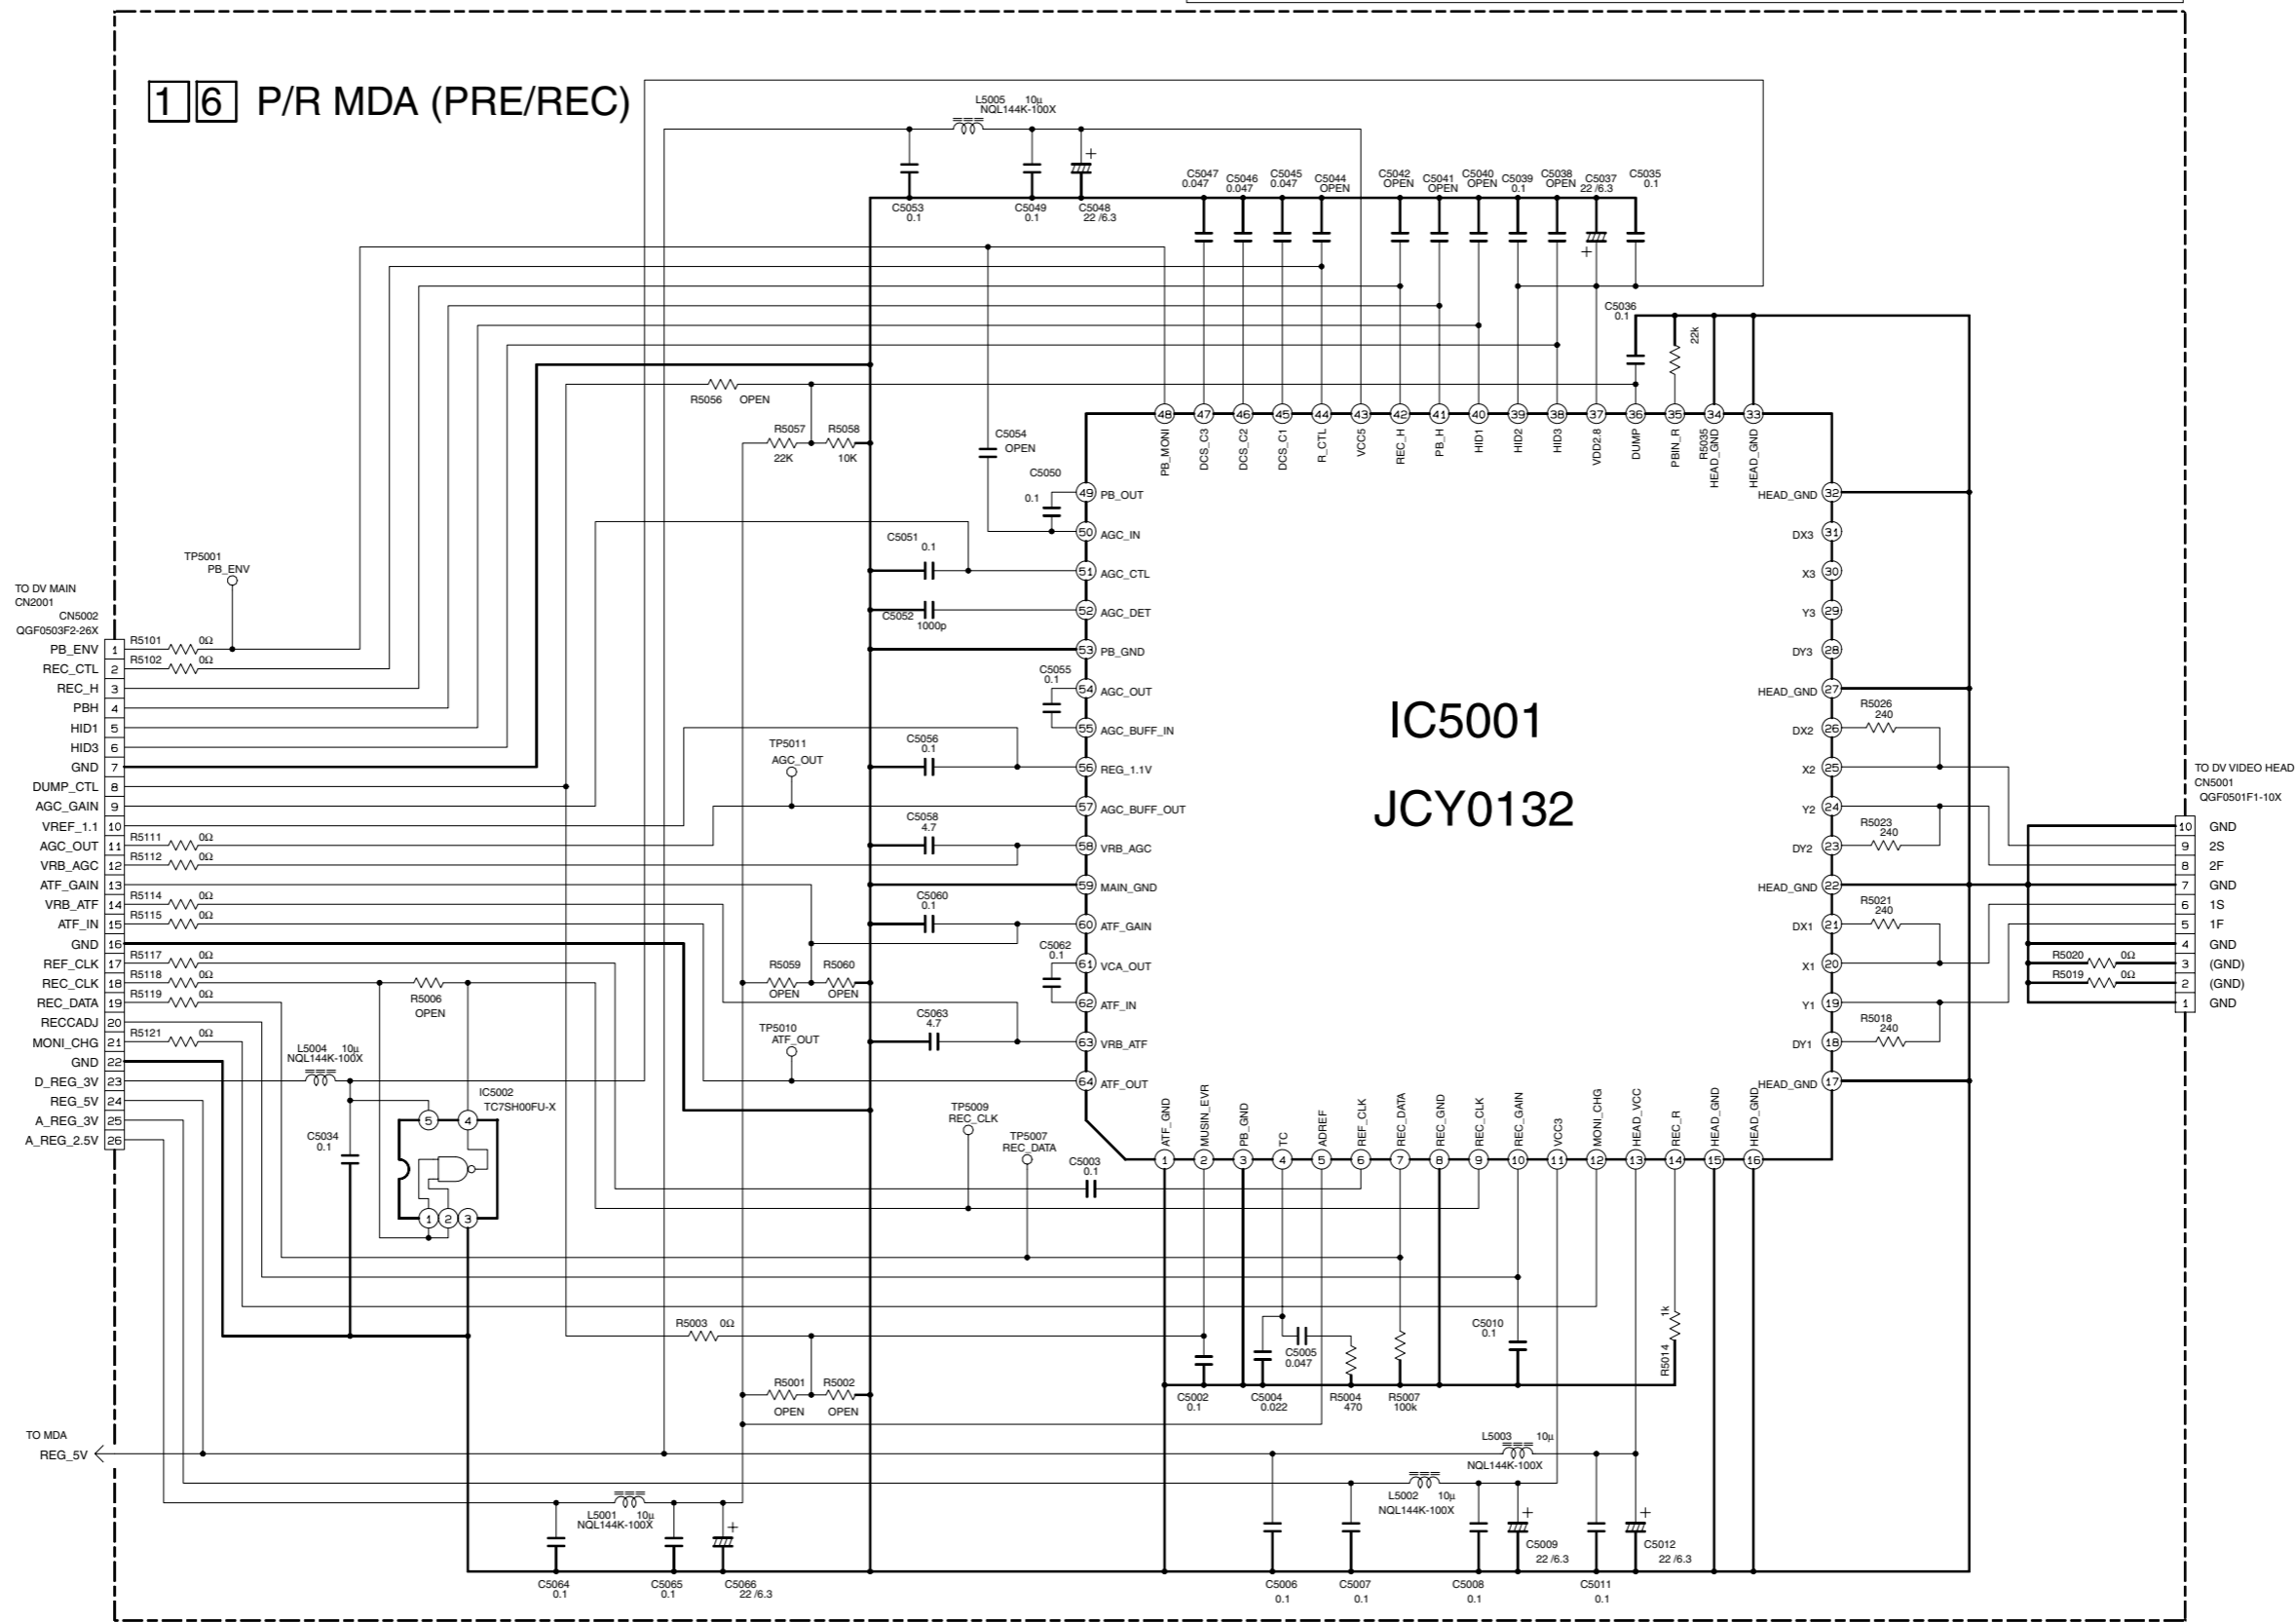


p20171001a_rev0

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

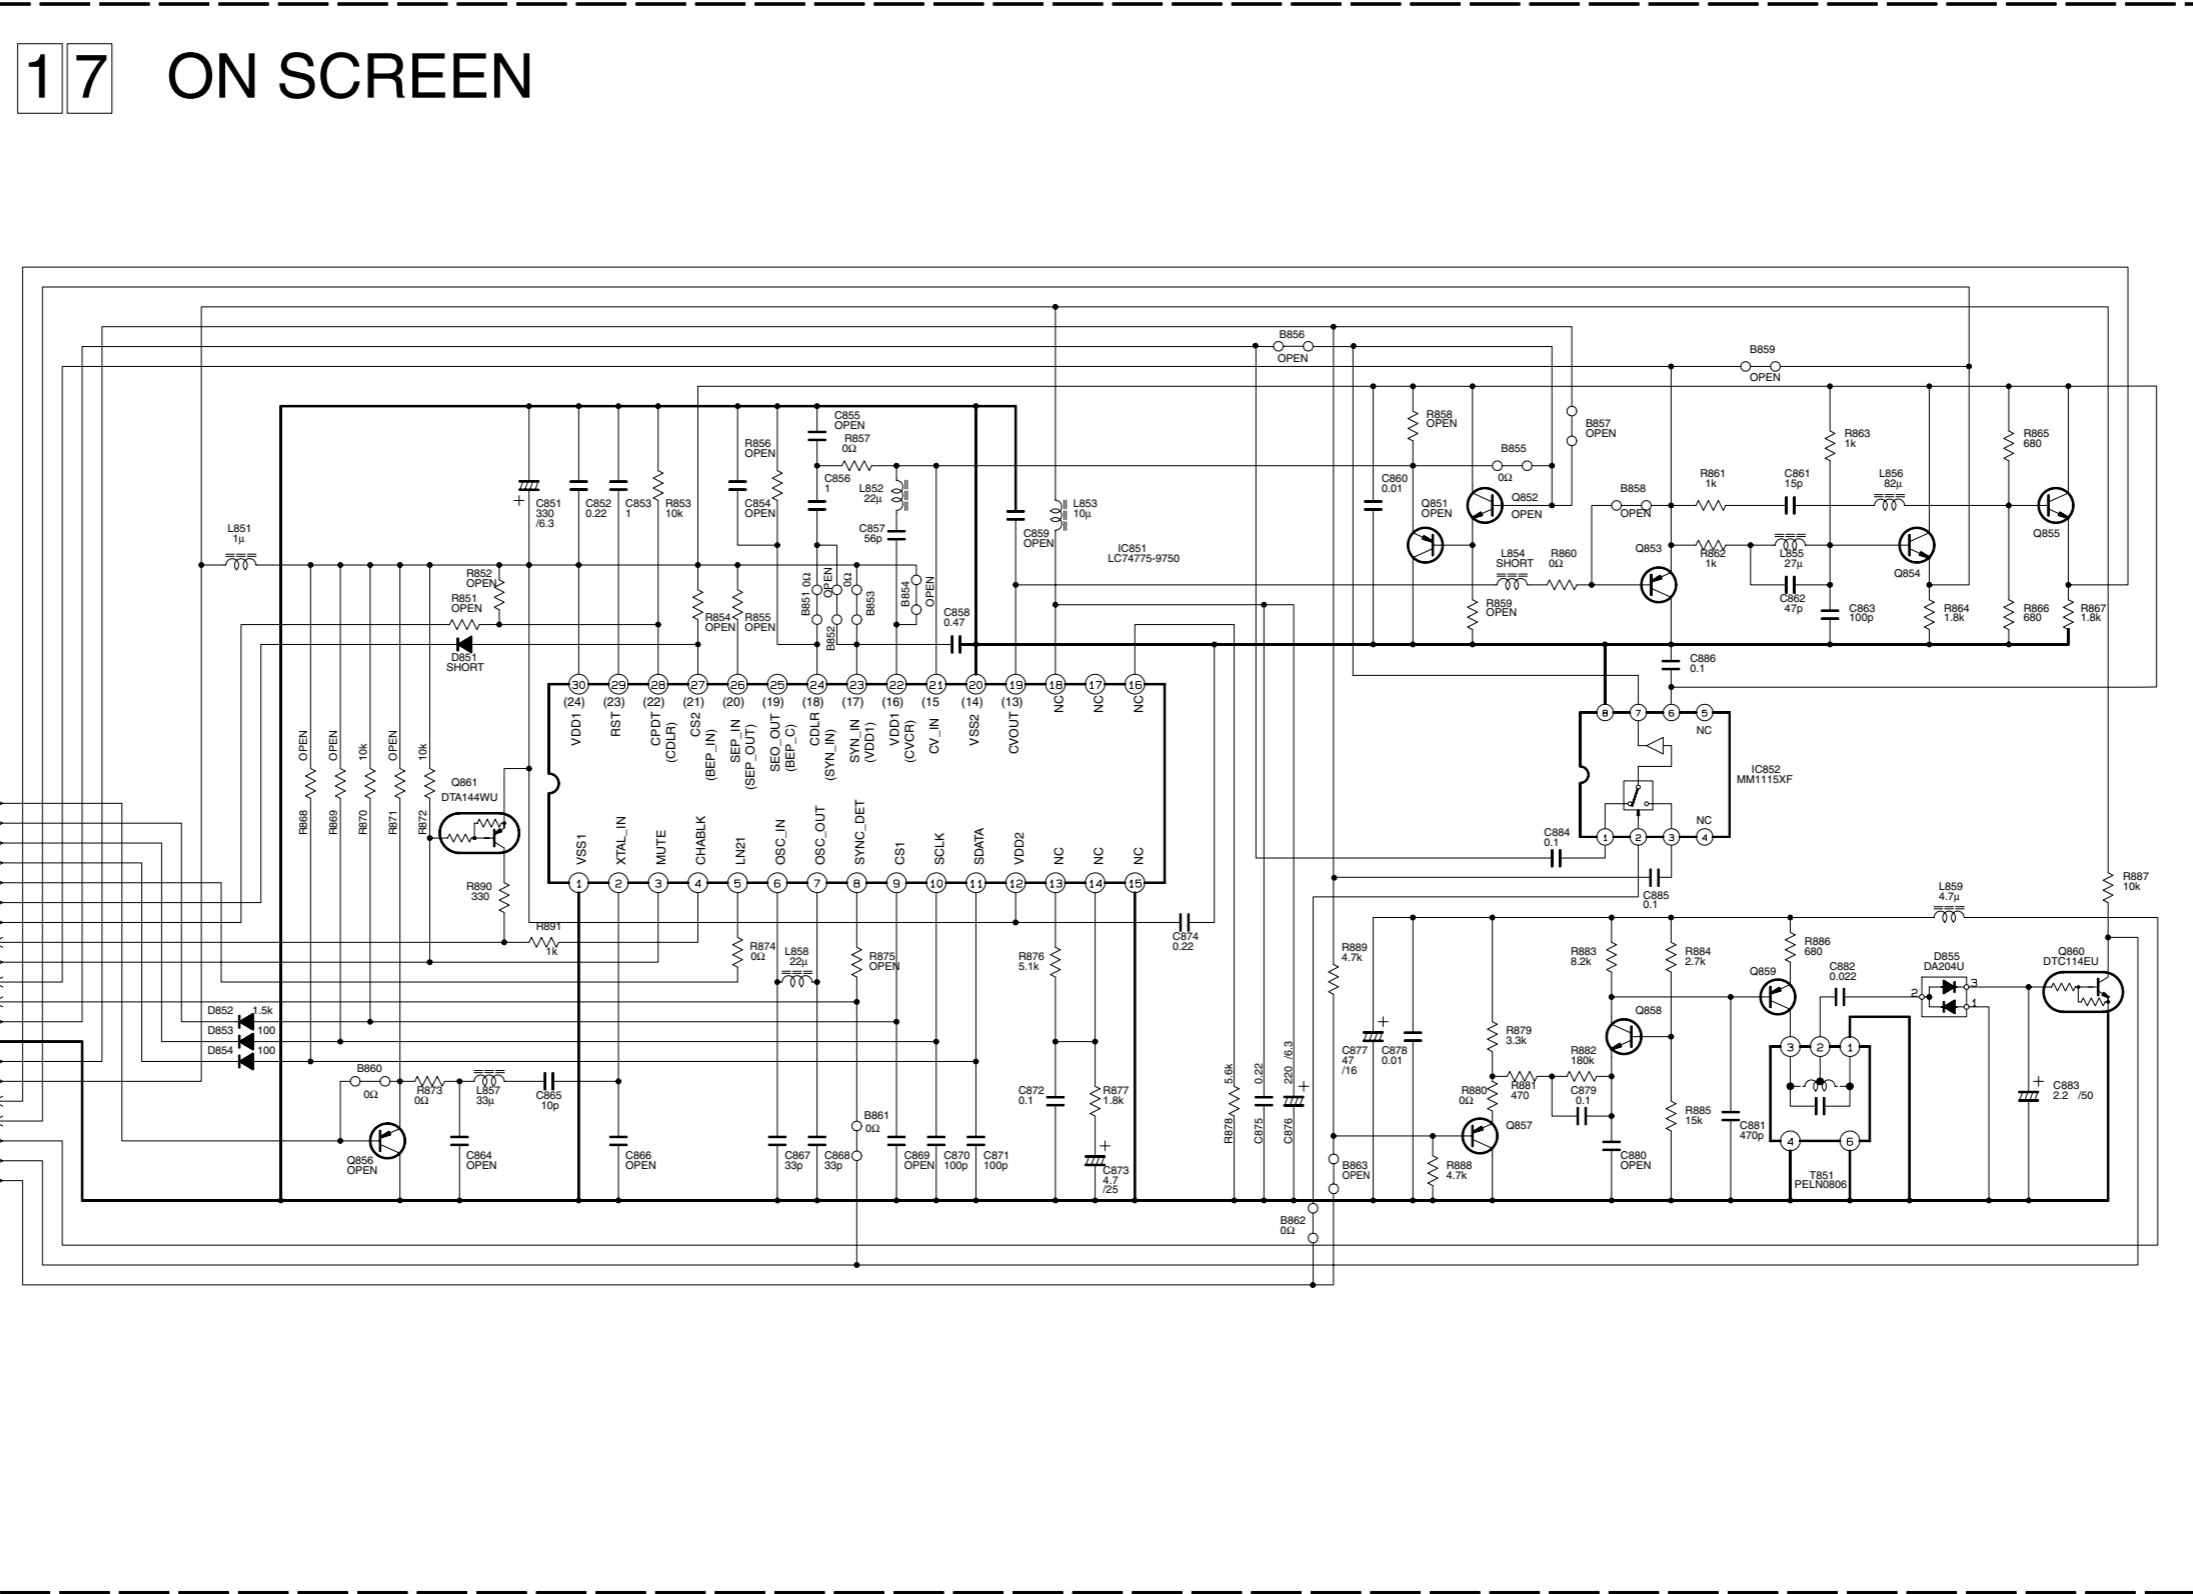

p20192001a_rev0


NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

ALL NPN TYPE TRANSISTORS ARE 2SC4081/QRS/
 ALL PNP TYPE TRANSISTORS ARE 2SA1576A/QRV.

4.17 DISPLAY, EJECT SW, LED/SW, JACK AND JOG SCHEMATIC DAIGRAMS

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

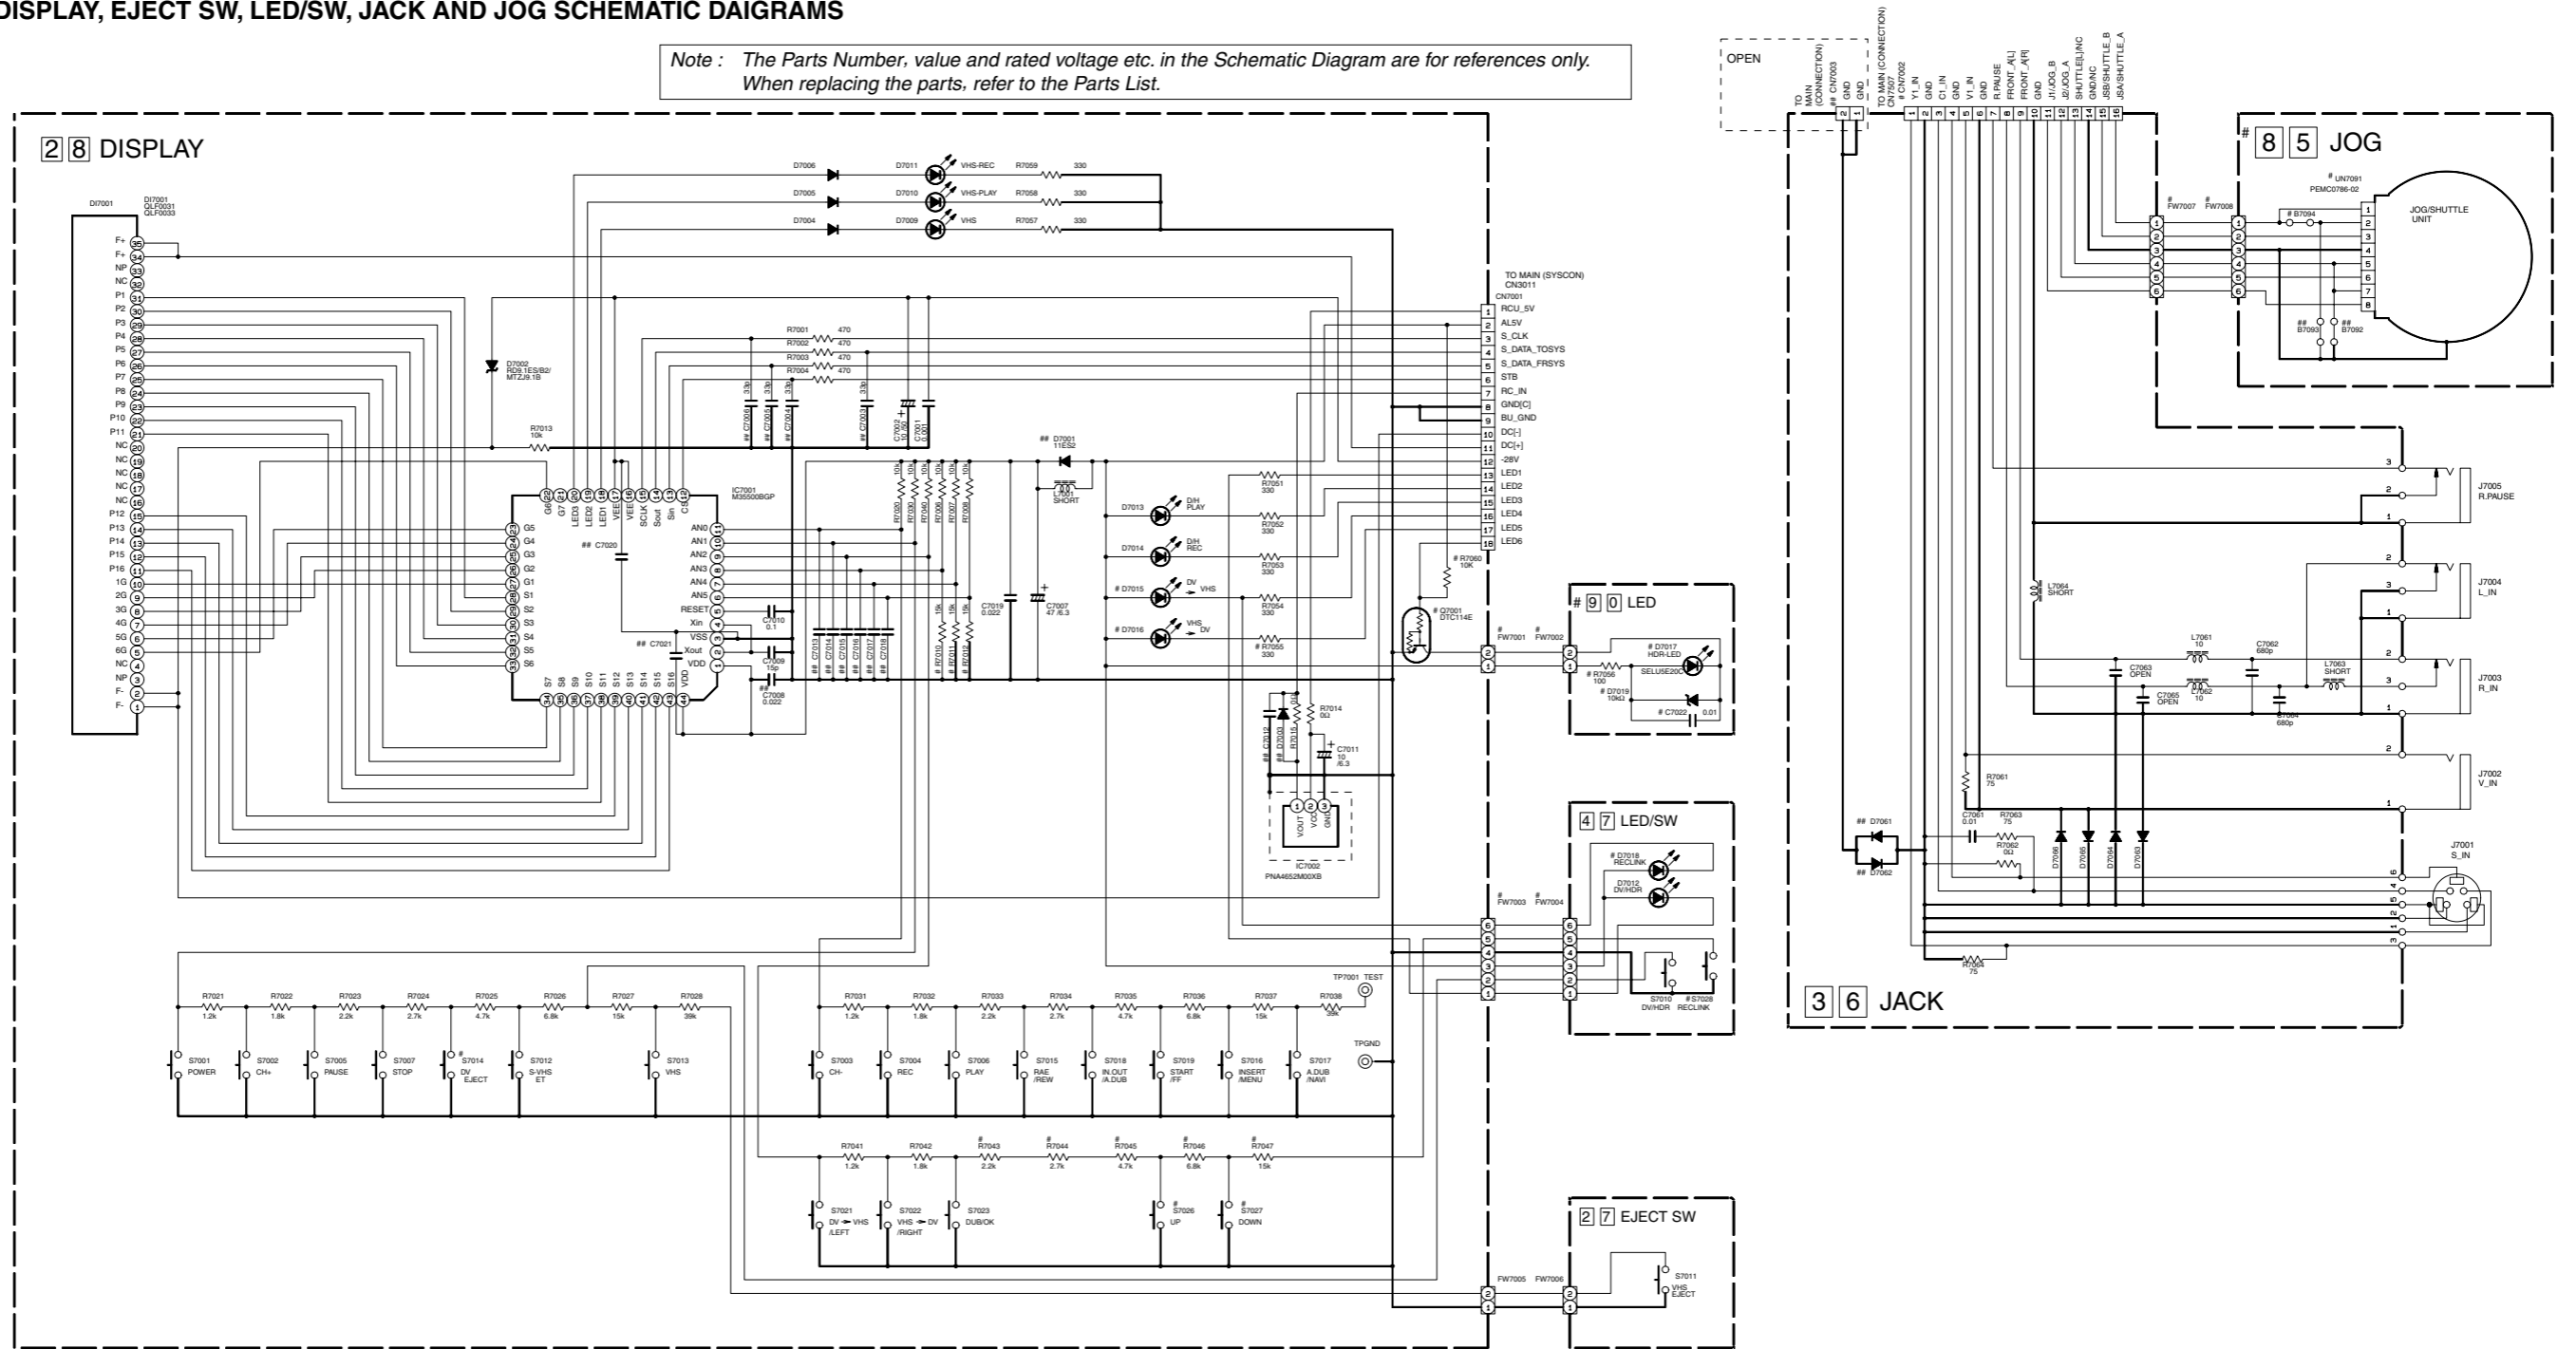

p10309001a_rev1

DIFFERENCE TABLE


	UN7091 S7094 FW7007 FW7008	CN7002	D7017 FW7001 FW7002 R7060 Q7001	D7018 S7028 R7044 R7045 R7046 R7047	S7014 D7016 R7055	FW7003 FW7004
DVS2 V520	○	1-16	X	○	○	1-4
HDS1	X	1-10	○	X	X	1-6

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL DIODES ARE 1N4148M OR 1SS133
 ALL CAPACITANCE VALUES ARE IN μF.

ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR
 ##:NOT USED

4.18 DV SYSTEM CONTROL SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only.
When replacing the parts, refer to the Parts List.

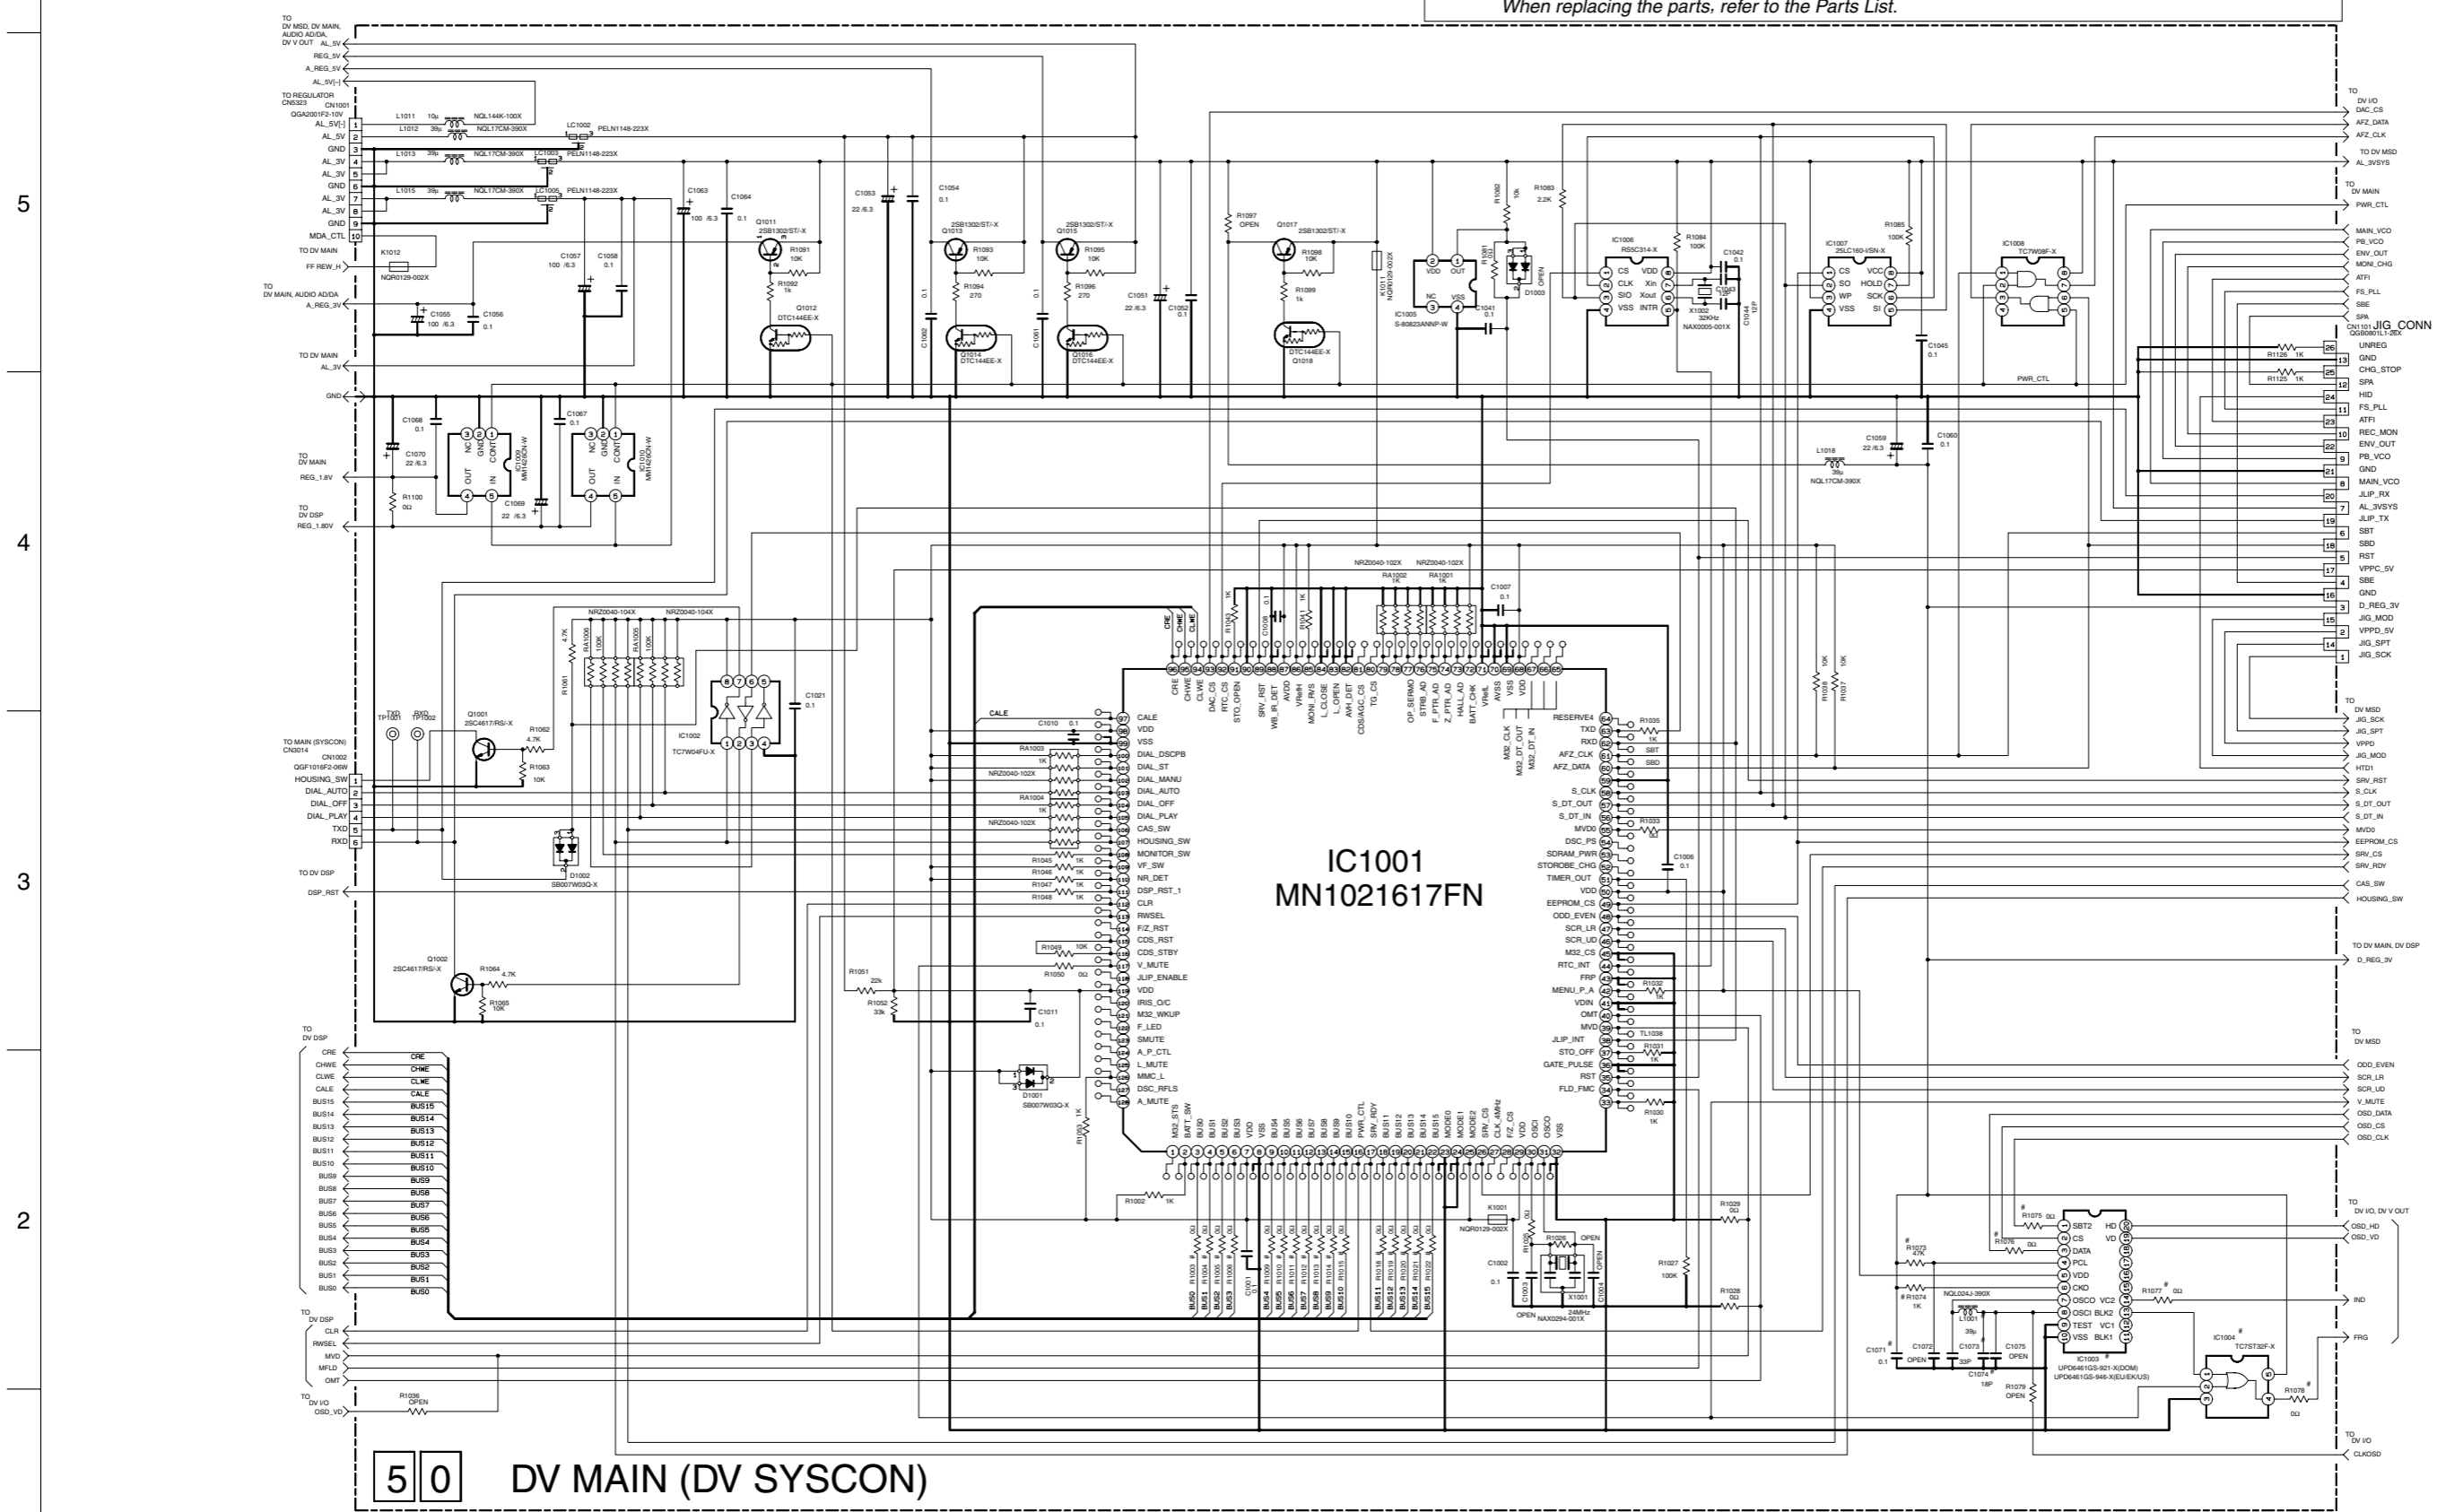

50 DV MAIN (DV SYSCON)


p10285001a_rev0

NOTES: UNLESS OTHERWISE SPECIFIED:
ALL RESISTANCE VALUES ARE IN OHMS.
ALL INDUCTANCE VALUES ARE IN H.
ALL CAPACITANCE VALUES ARE IN µF.

ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR

4.19 DV MSD SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

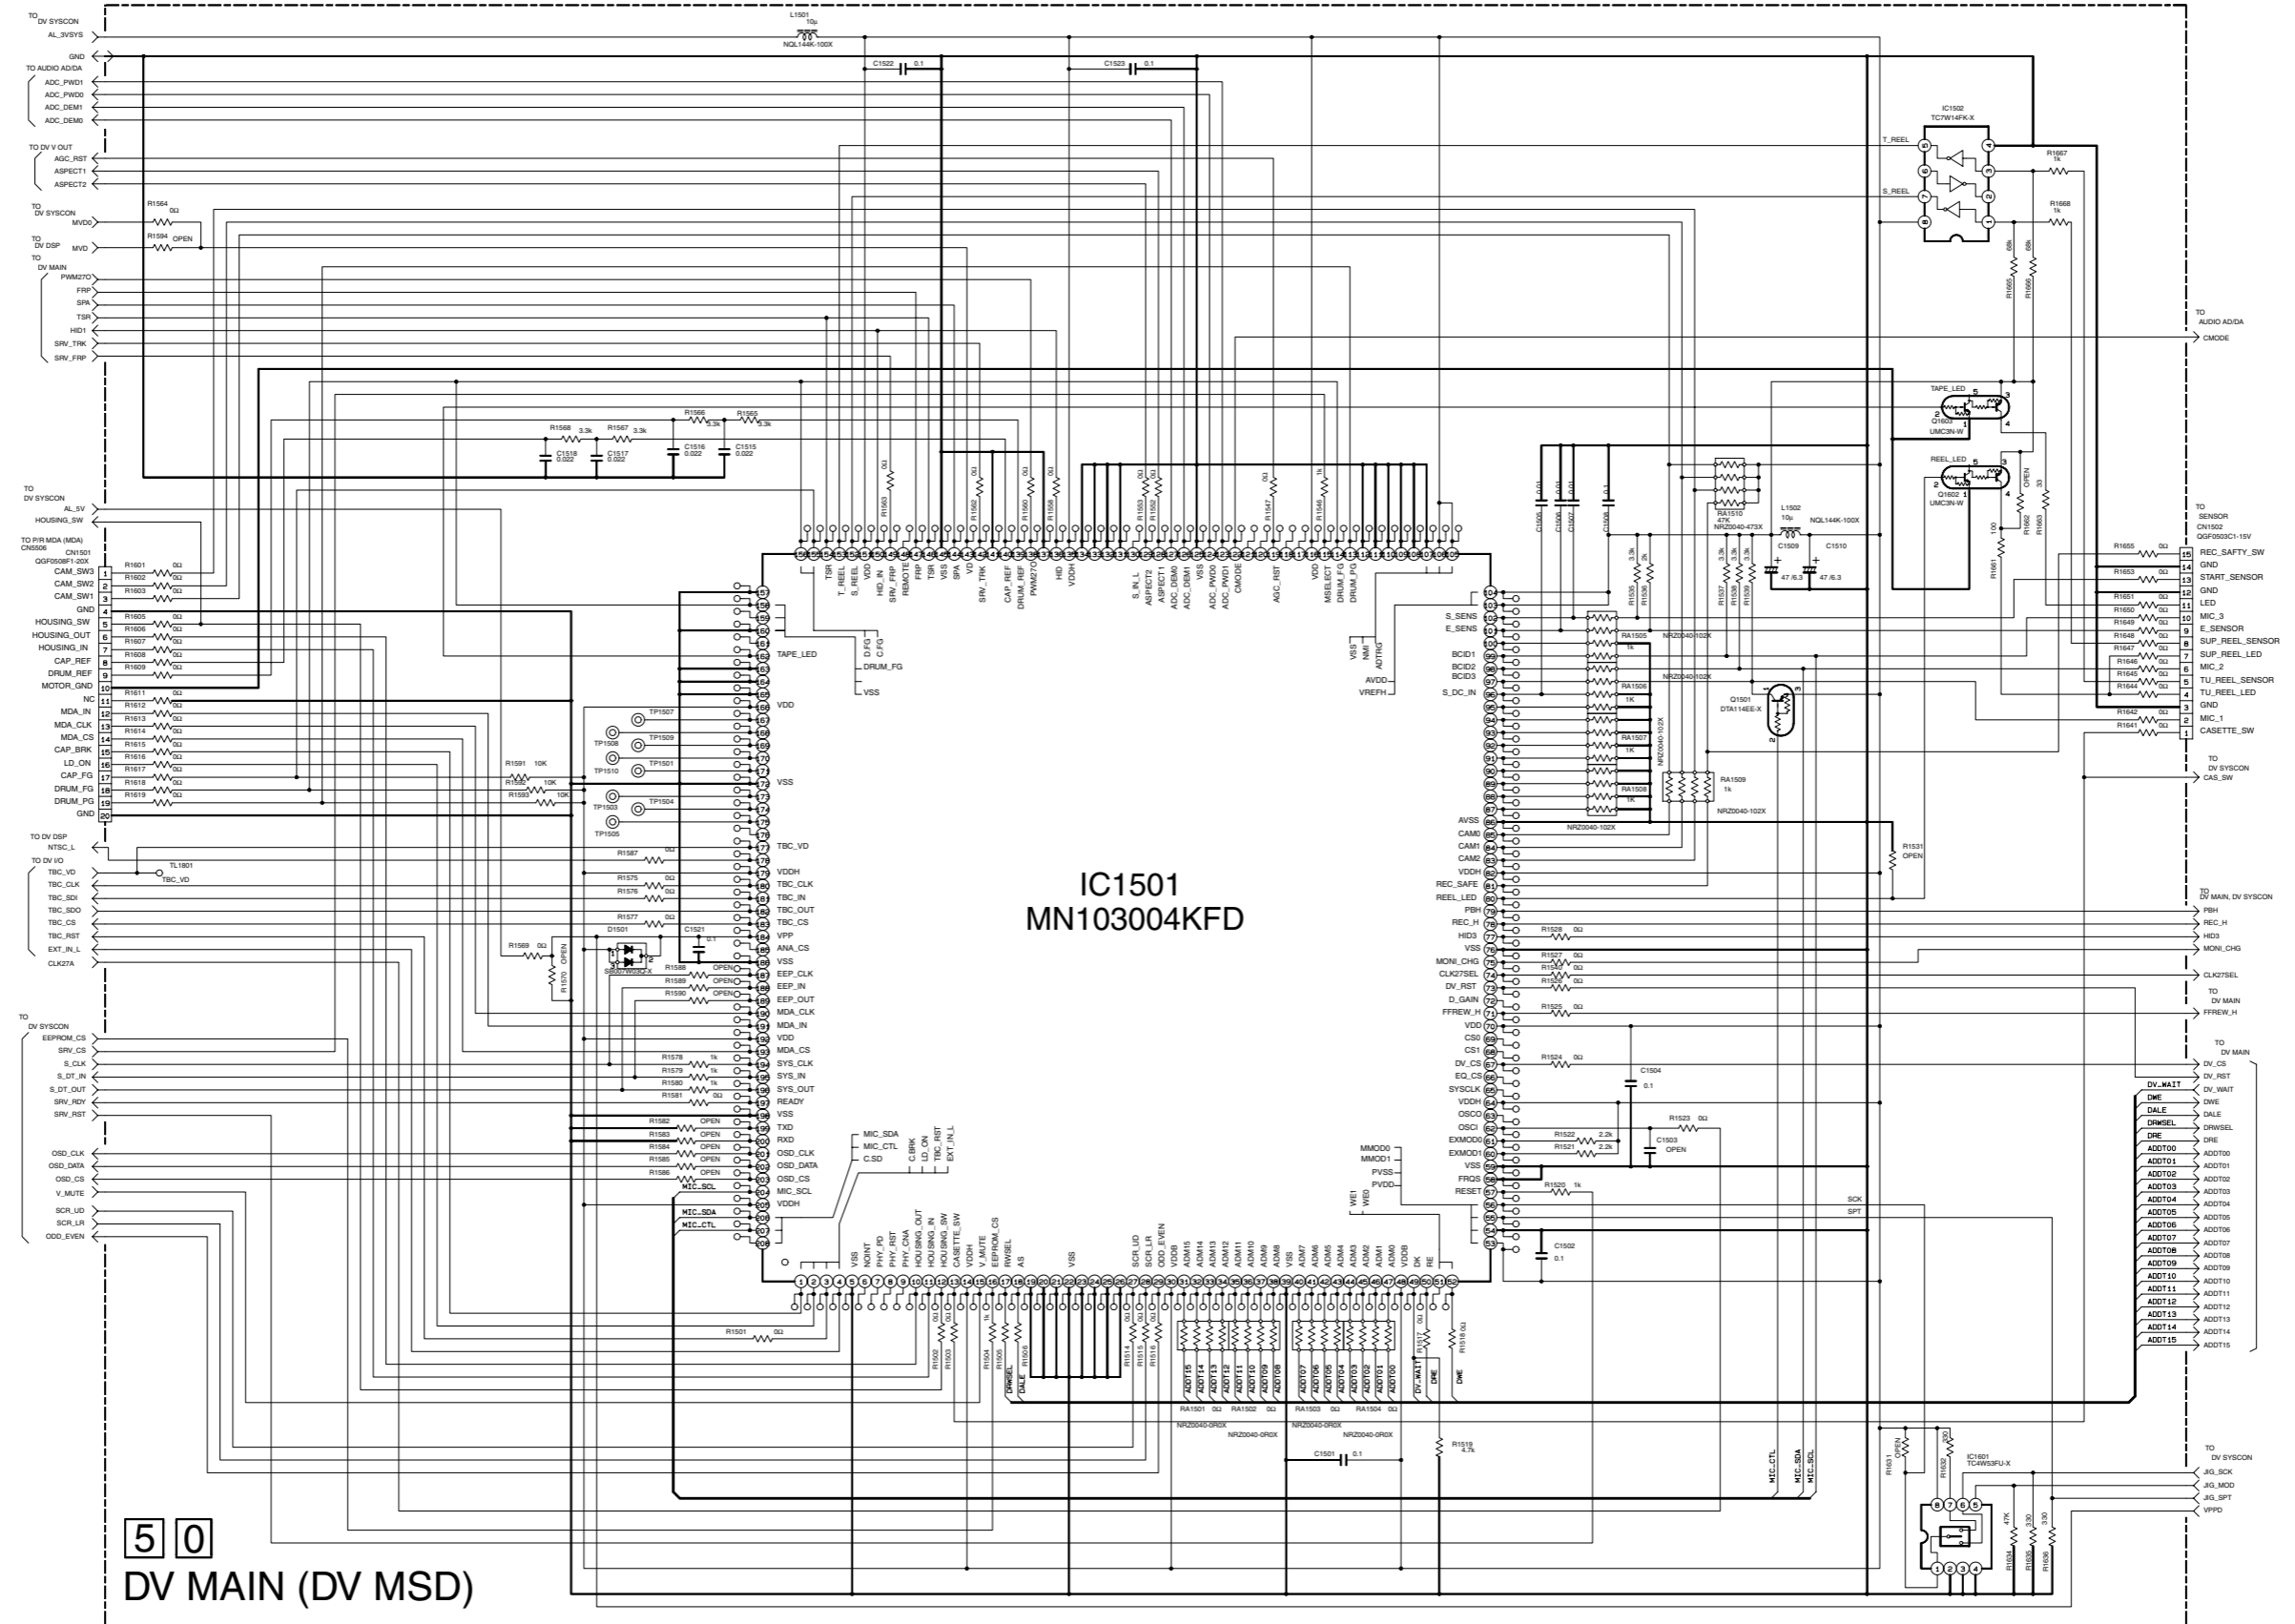


DV MAIN (DV MSD)

NOTES UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

4.20 DV MAIN SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only.
When replacing the parts, refer to the Parts List.

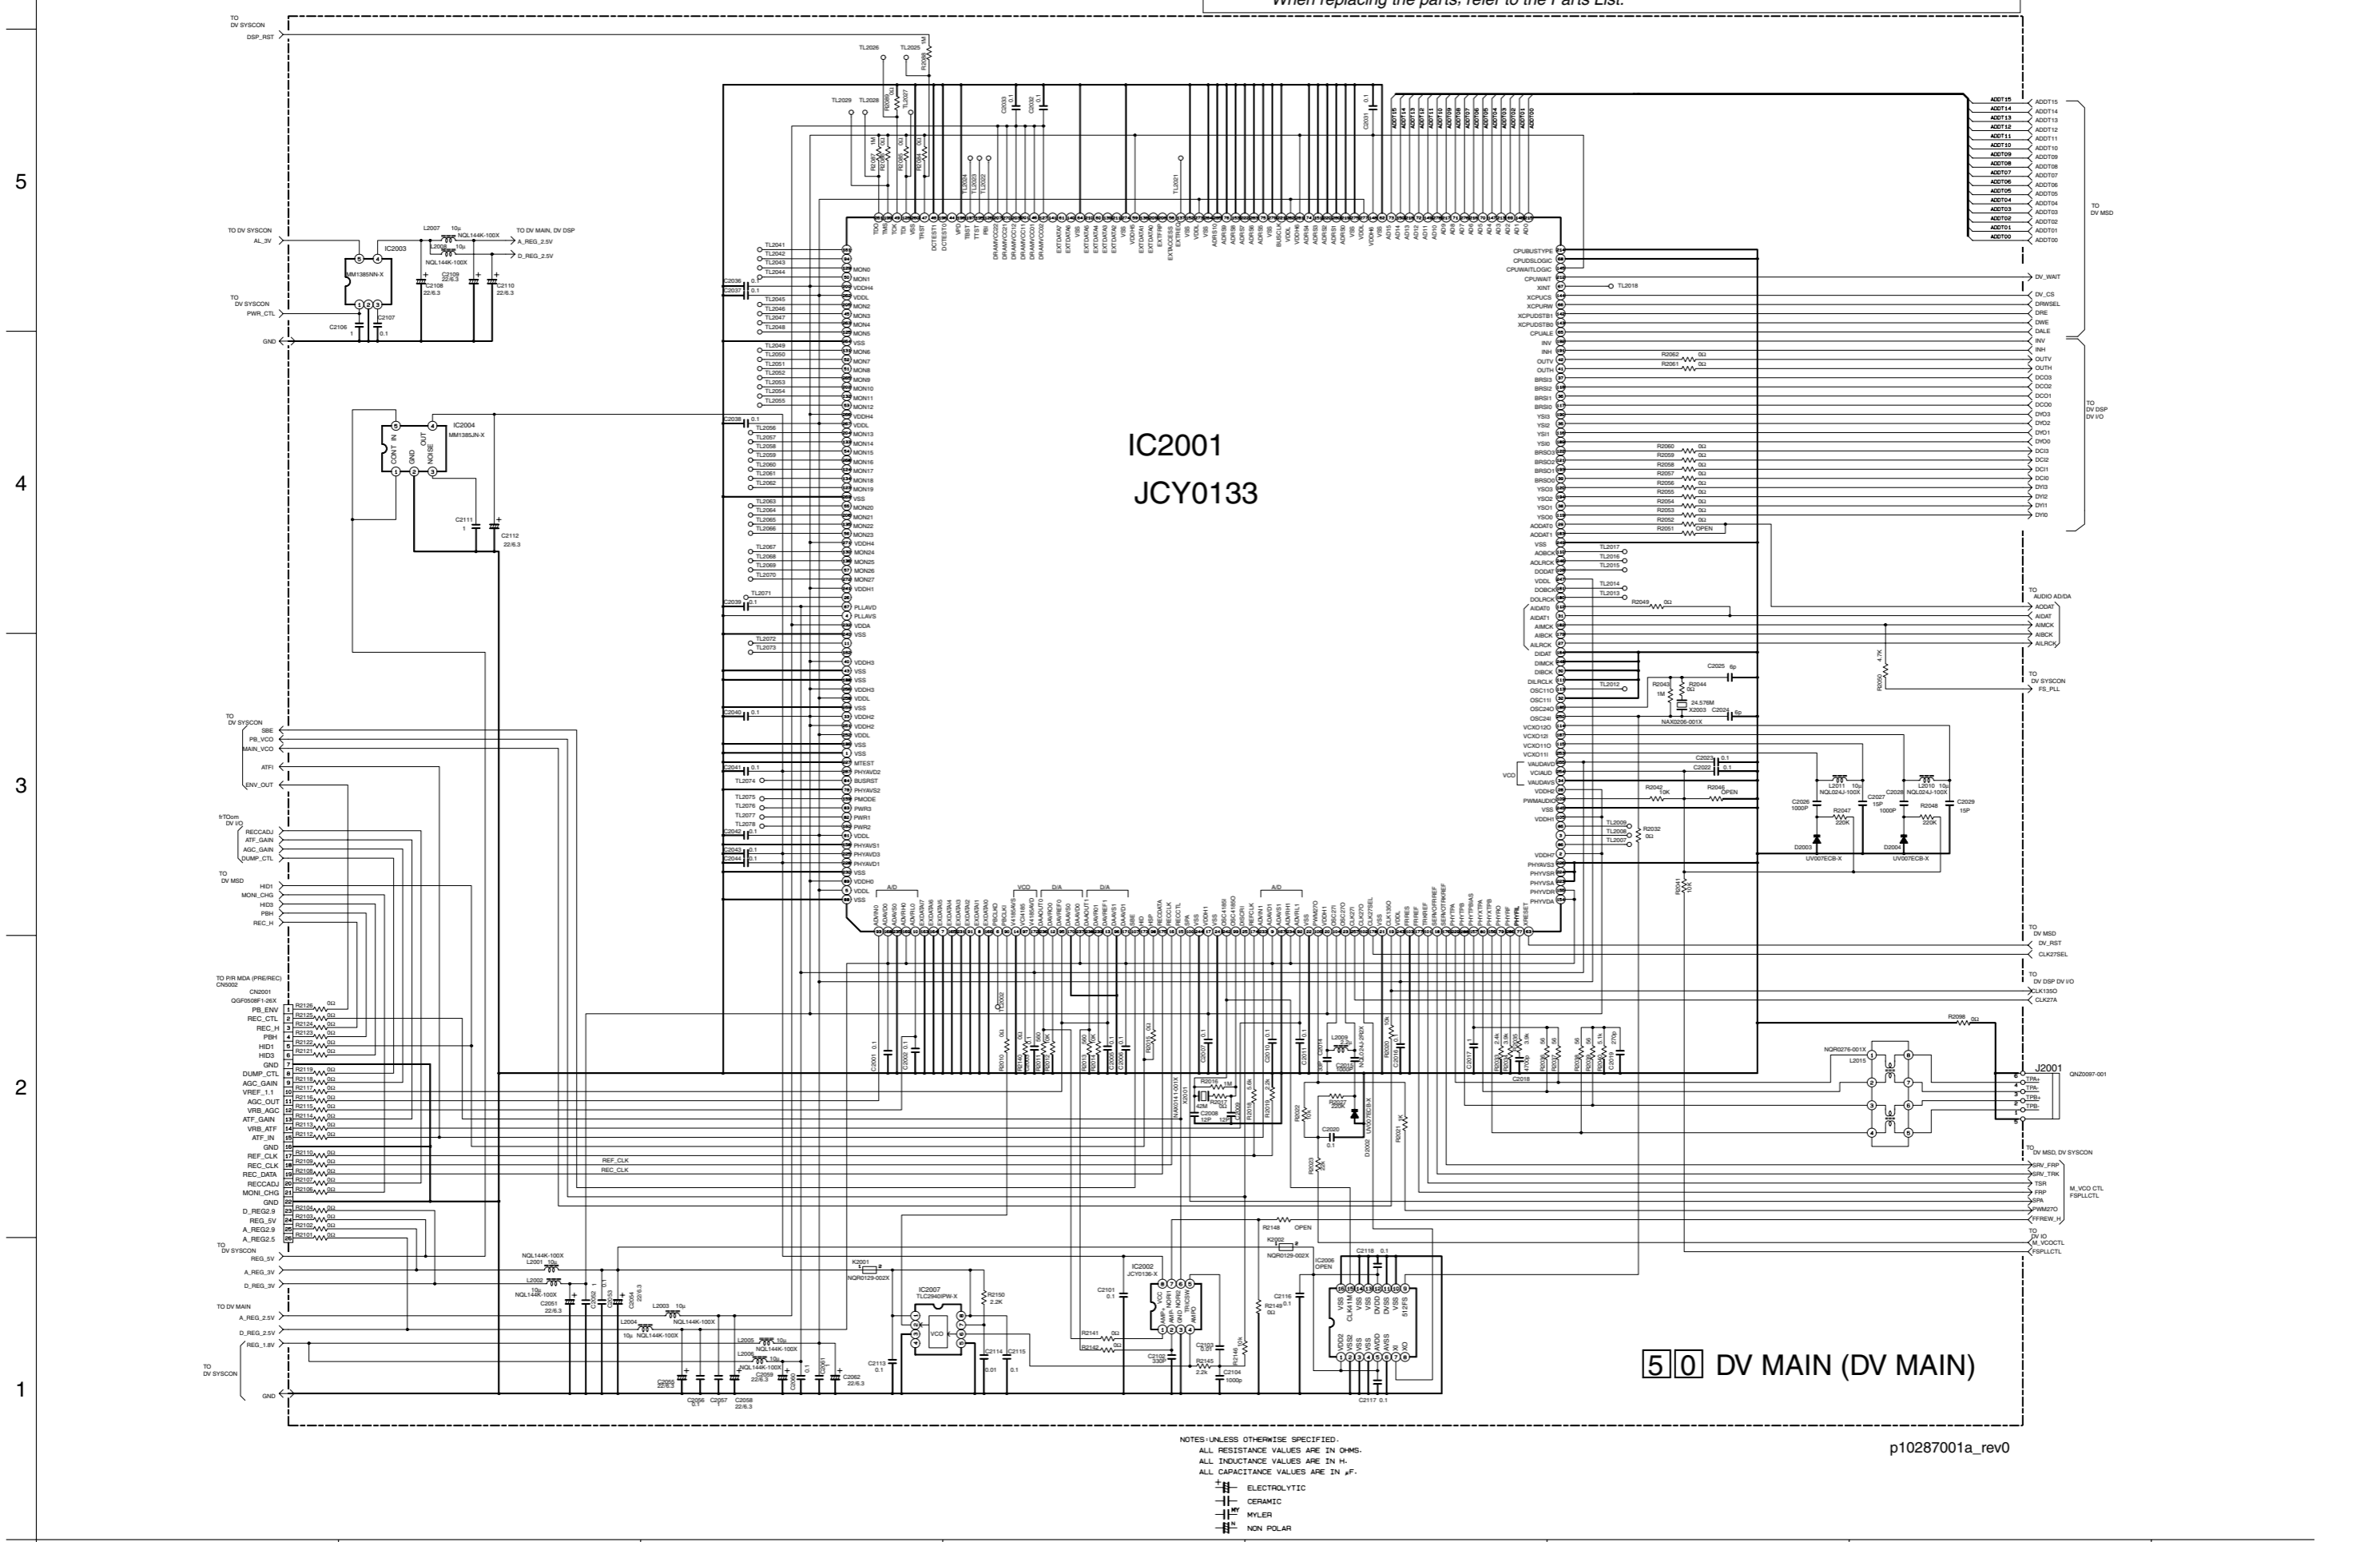

IC2001
JCY0133

50 DV MAIN (DV MAIN)


NOTES-UNLESS OTHERWISE SPECIFIED.
ALL RESISTANCE VALUES ARE IN OHMS.
ALL INDUCTANCE VALUES ARE IN H.
ALL CAPACITANCE VALUES ARE IN µF.
ELECTROLYTIC
CERAMIC
MYLAR
NON POLAR

p10287001a_rev0

4.21 DV I/O SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

50 DV MAIN (DV I/O)

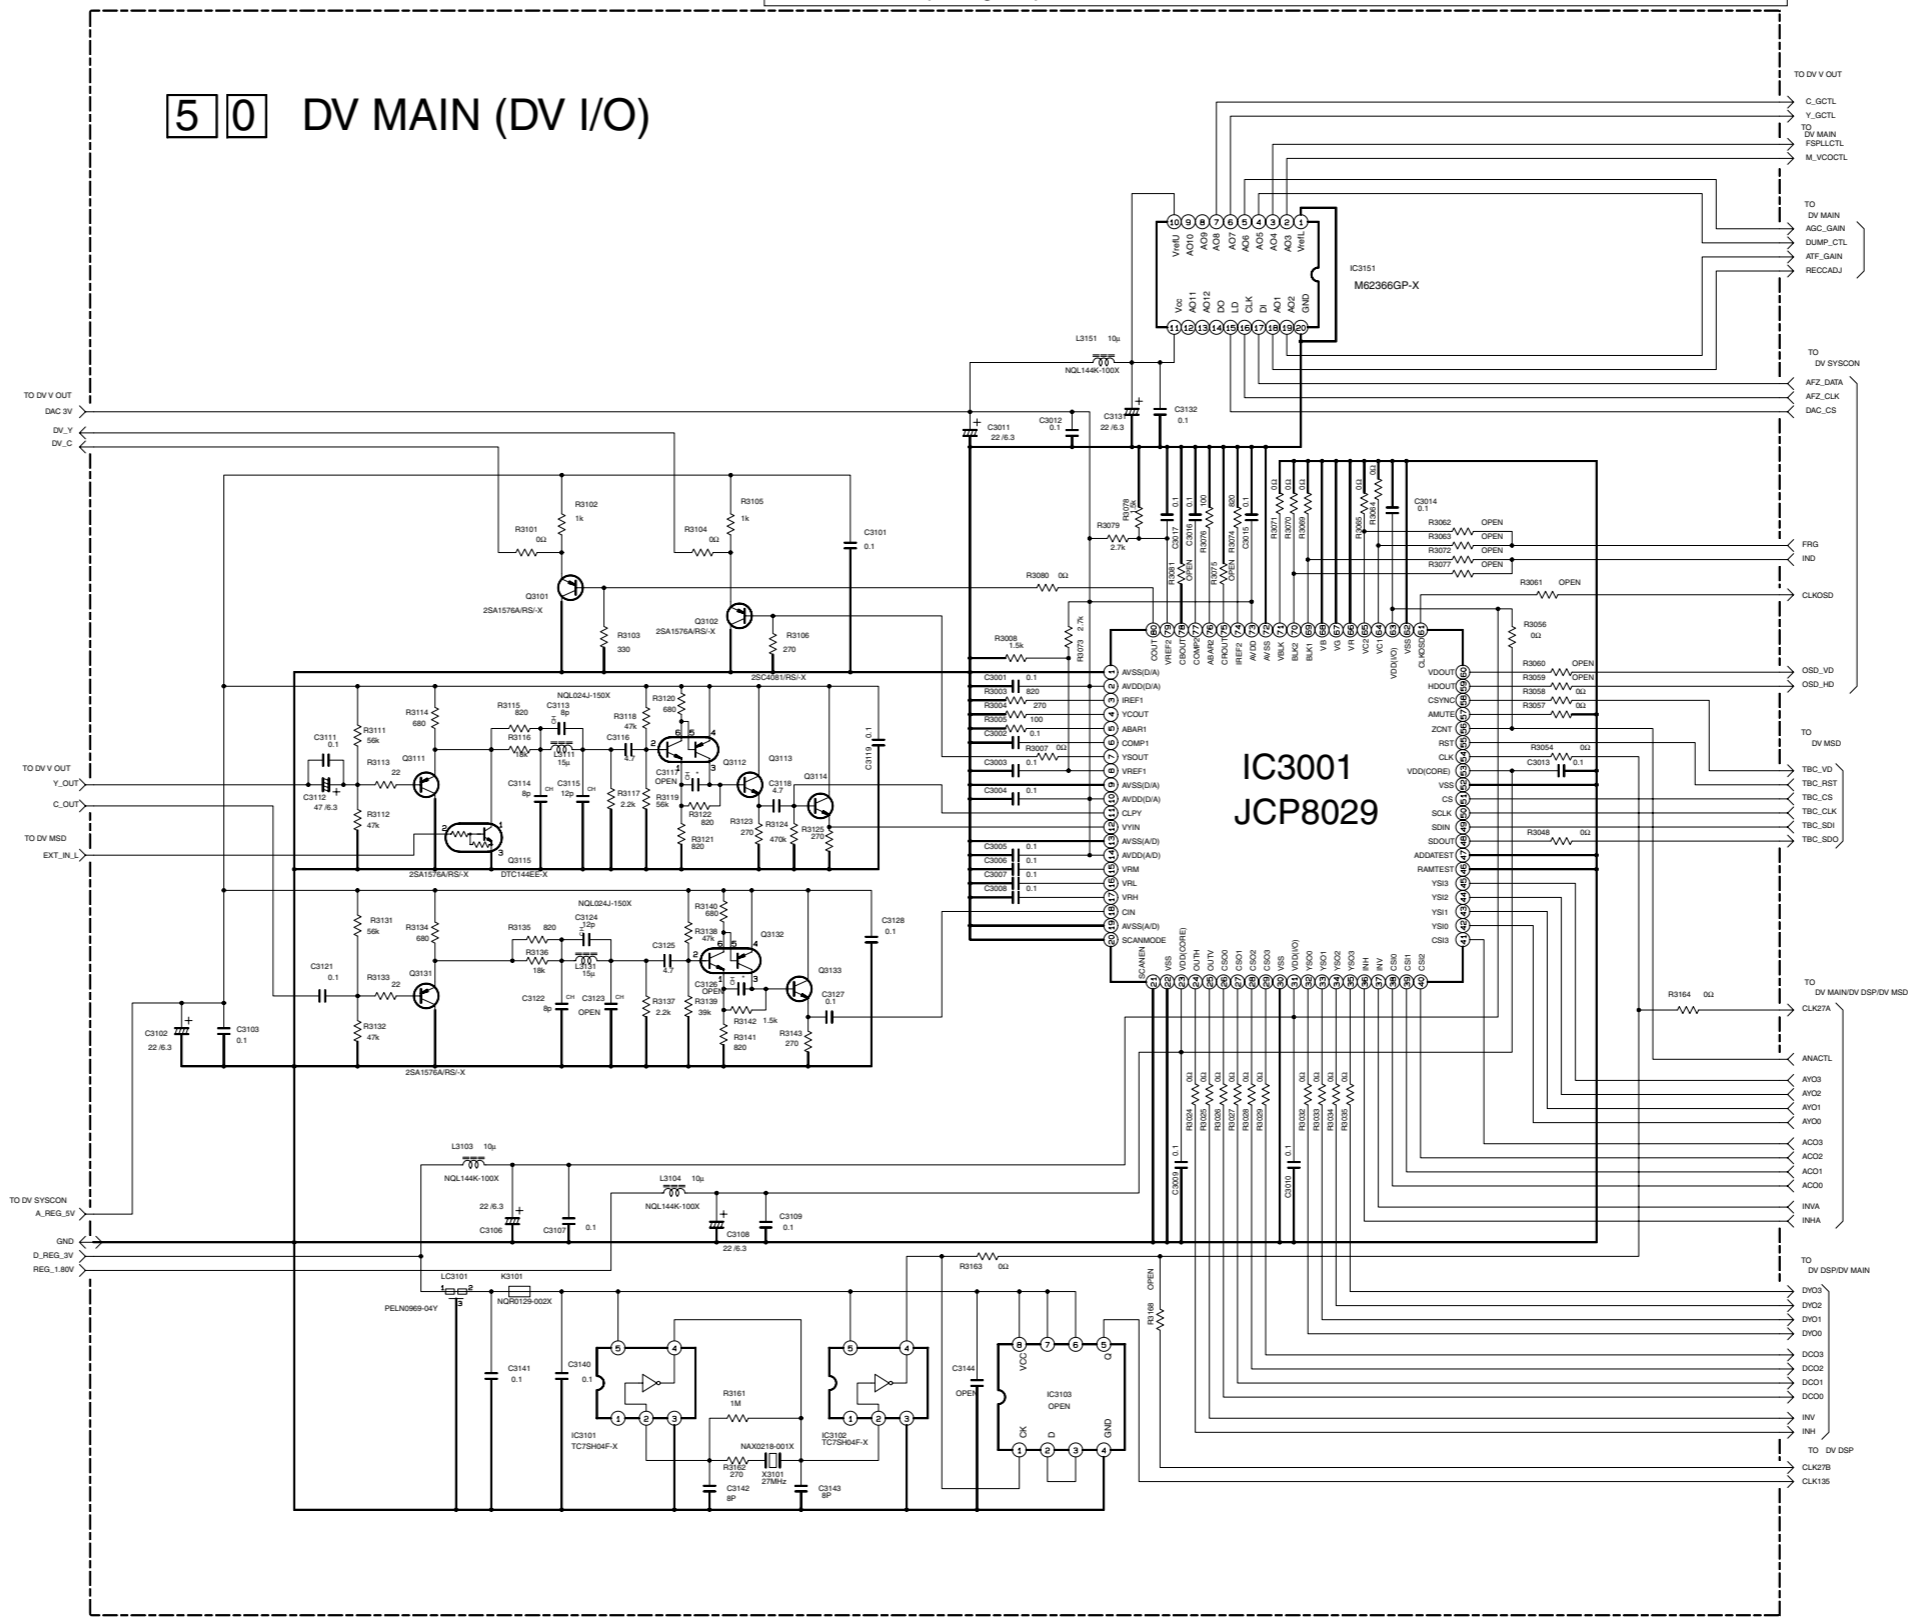

p10288001a_rev0

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN µF.


ELECTROLYTIC
 CERAMIC
 MYLAR
 NON POLAR

5
4
3
2
1

A B C D 4-45 4-46 E F G H

4.22 DV V OUT SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

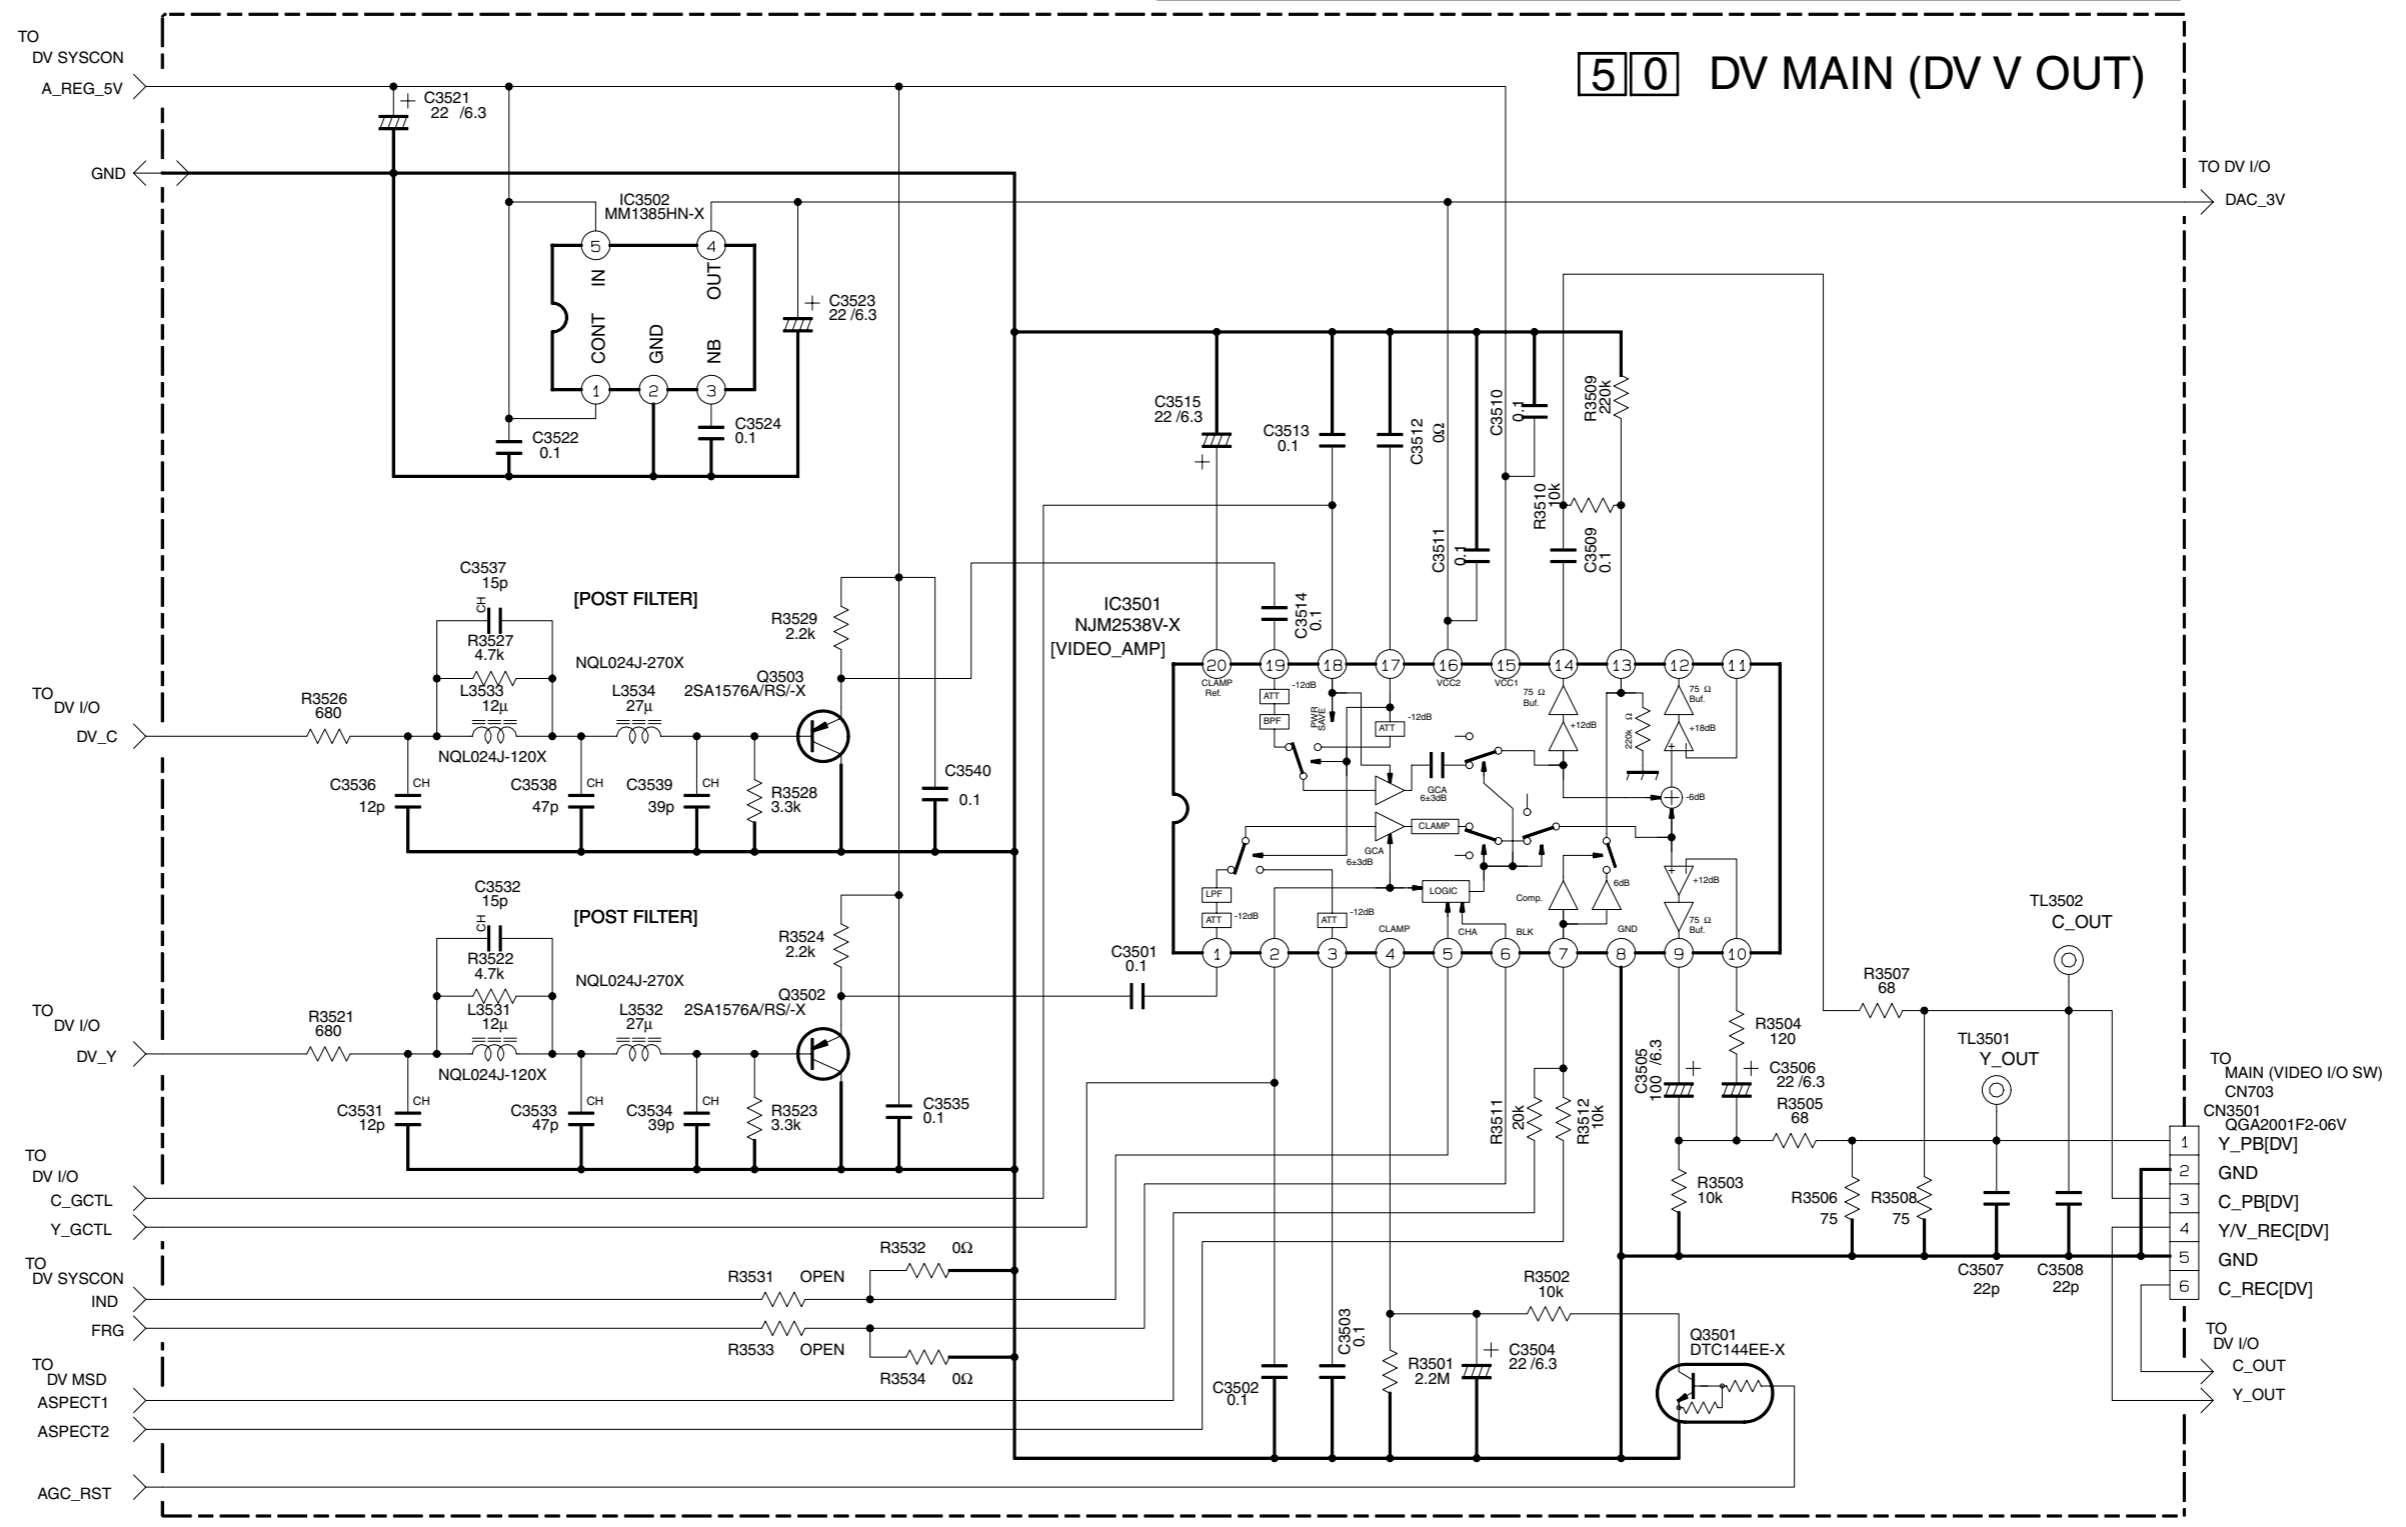

NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.


- ELECTROLYTIC
- CERAMIC
- MYLER
- NON POLAR

p30073001a_rev0

4.23 AUDIO AD/DA SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

50 DV MAIN (AUDIO AD/DA)

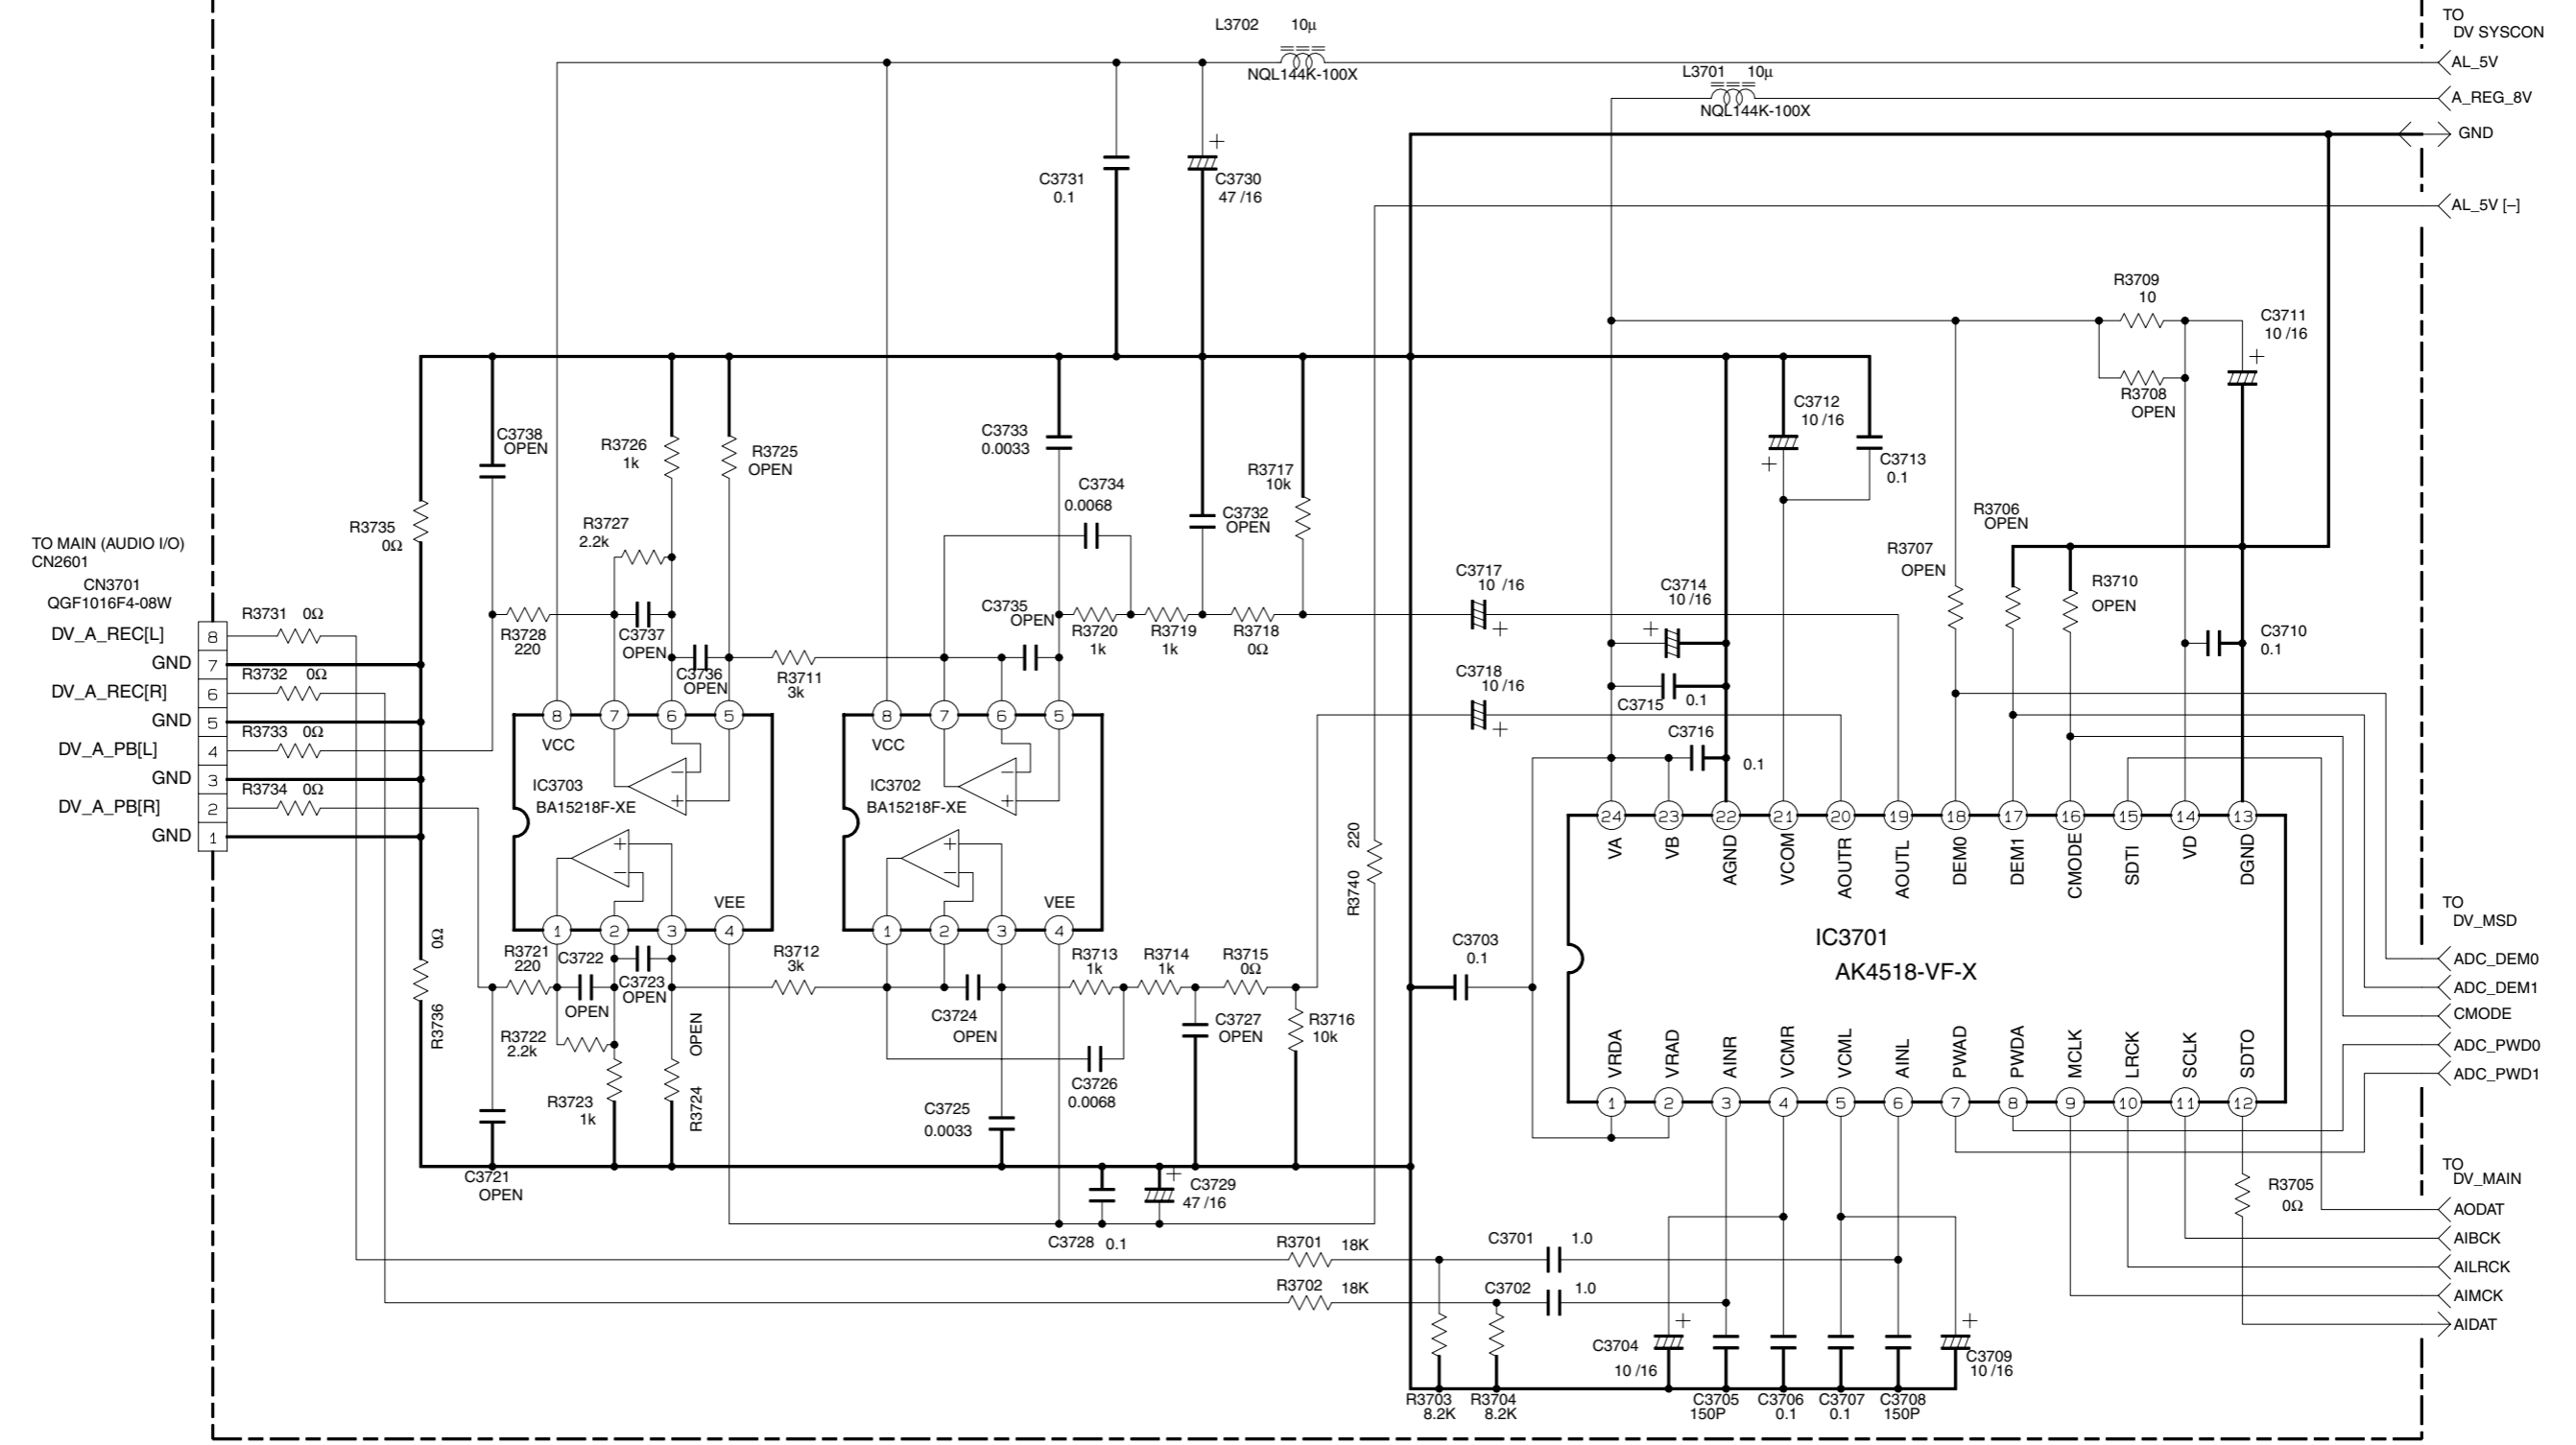


NOTES: UNLESS OTHERWISE SPECIFIED.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN μF.

- ELECTROLYTIC
- CERAMIC
- MYLER
- NON POLAR

p30074001a_rev0

4.24 DV DSP SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

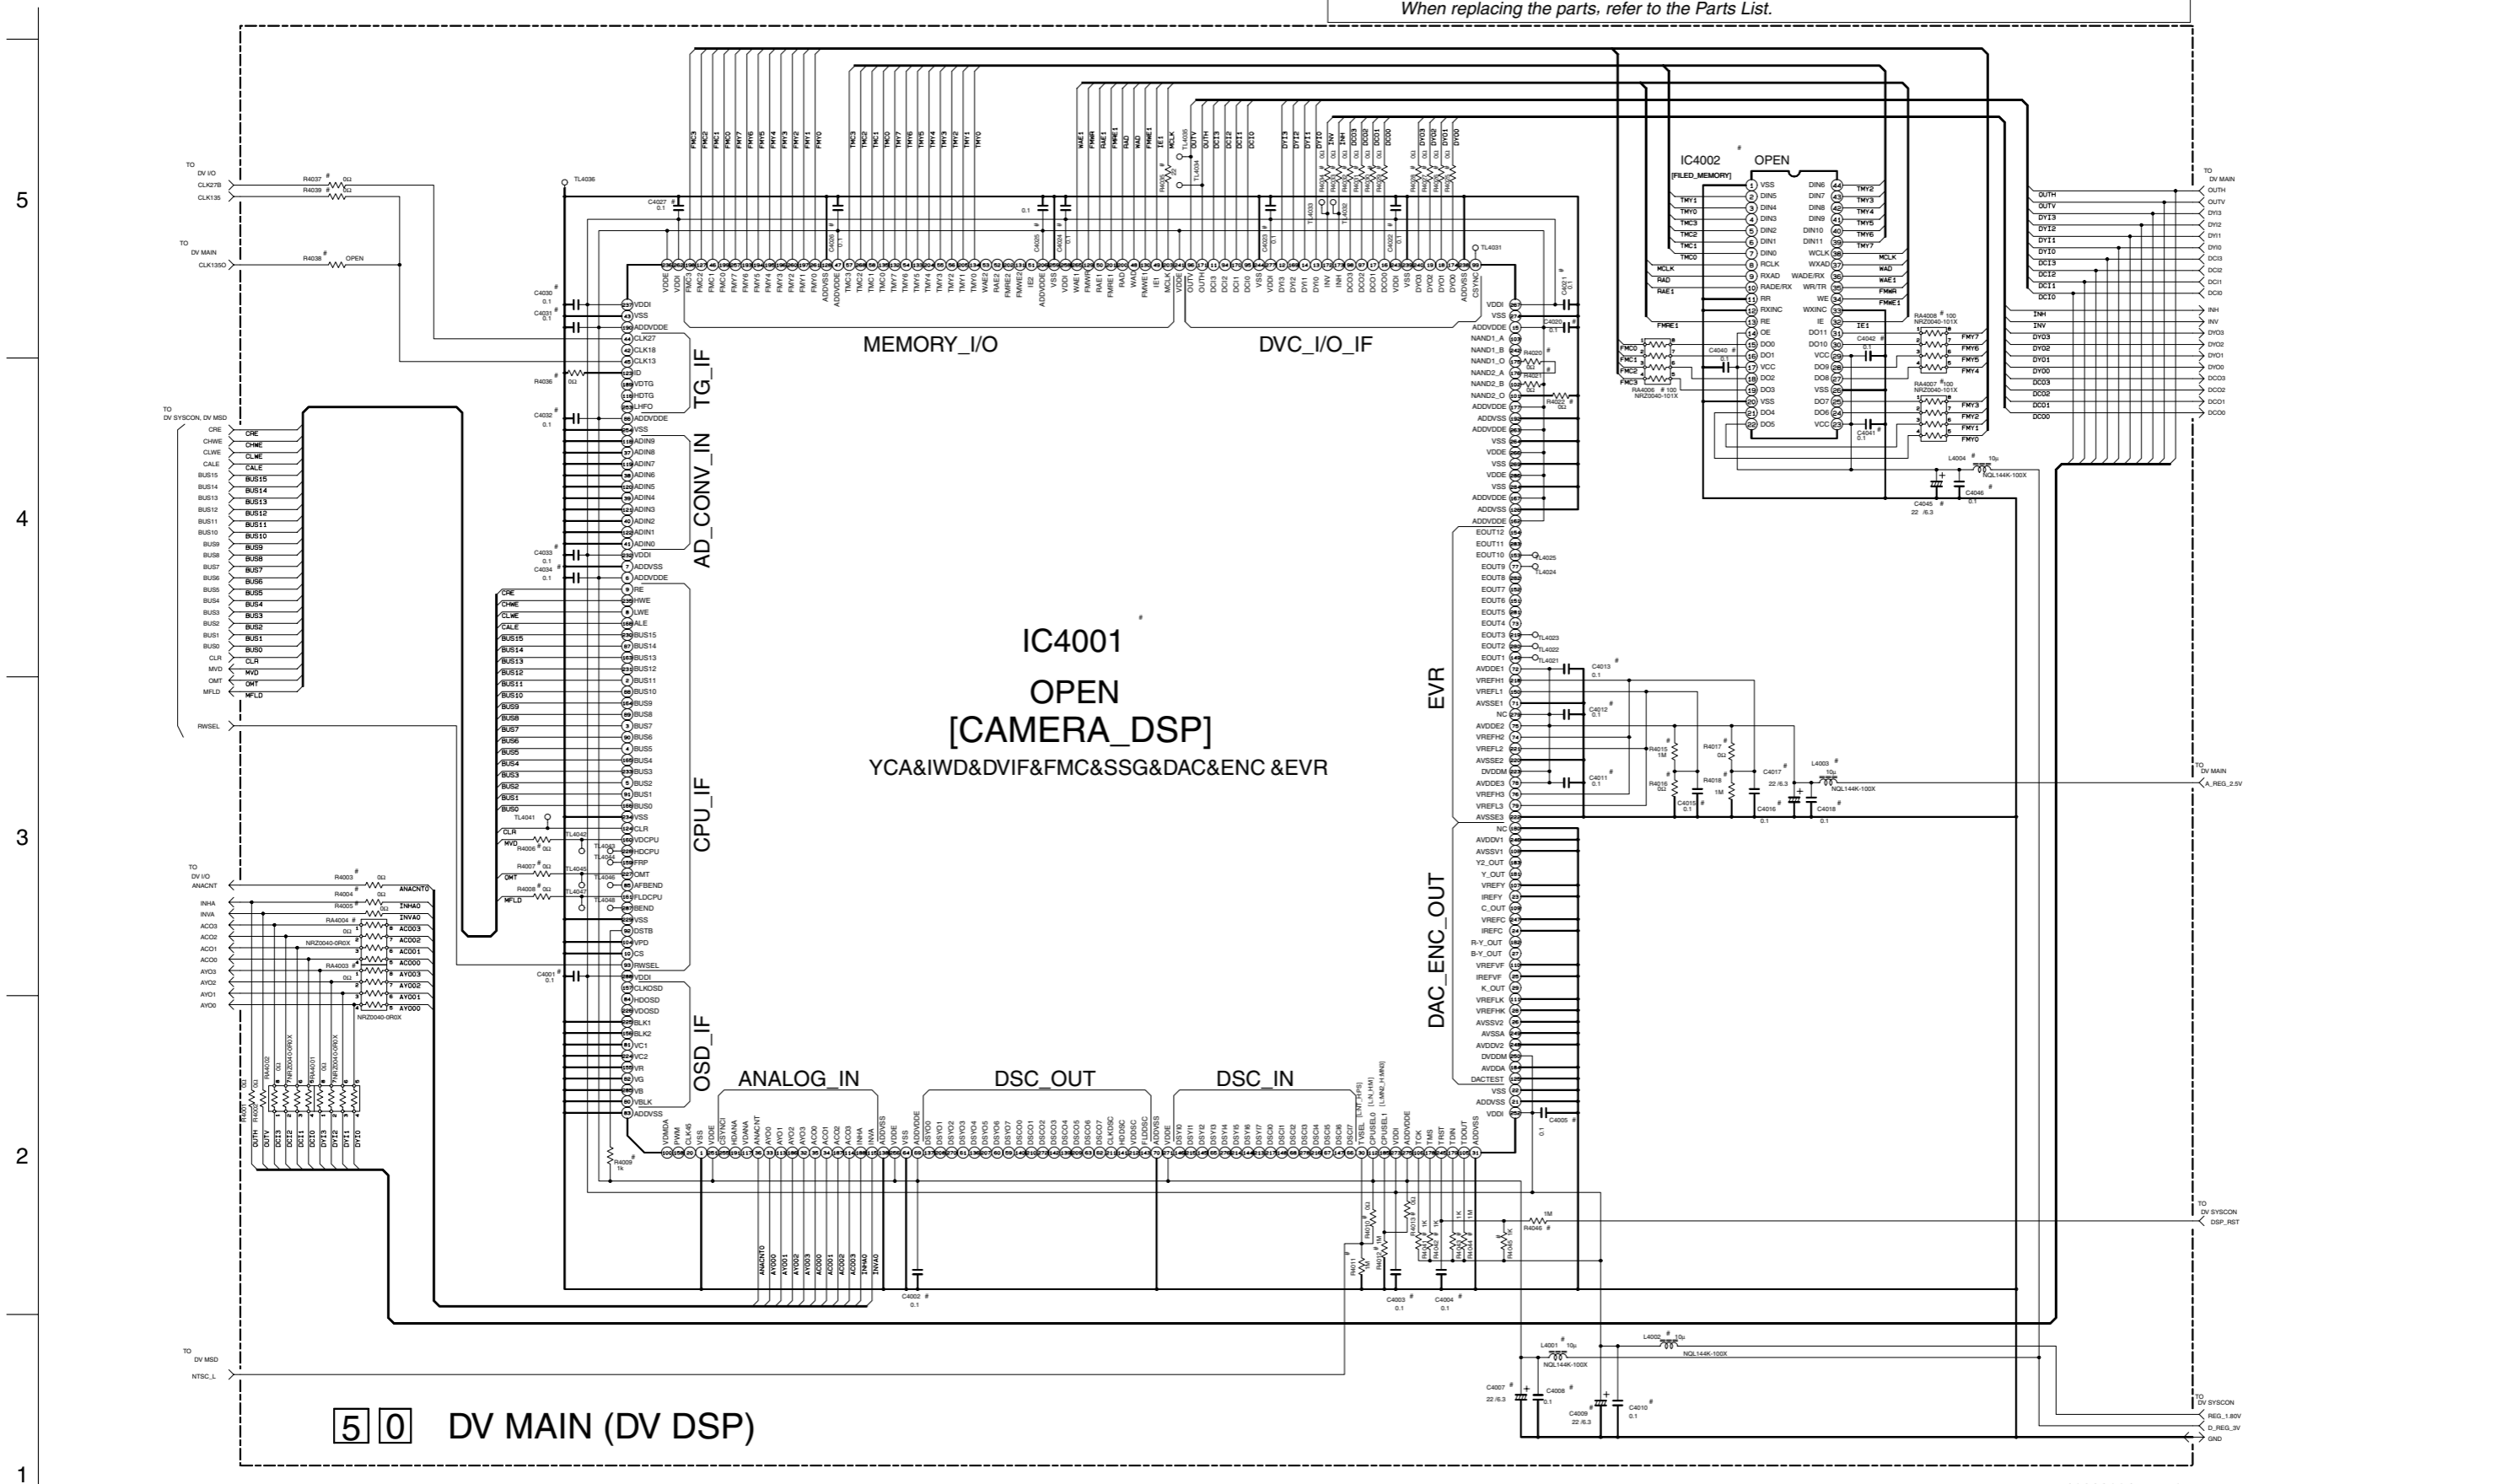

50 DV MAIN (DV DSP)


p10289001a_rev0

NOTES UNLESS OTHERWISE SPECIFIED:
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL INDUCTANCE VALUES ARE IN H.
 ALL CAPACITANCE VALUES ARE IN µF.

ELECTROLYTIC
 CERAMIC
 MYLER
 NON POLAR

4.25 SWITCHING REGULATOR AND REGULATOR CIRCUIT BOARDS

<01> SW REG, <02> REGULATOR
LPB10119-001C

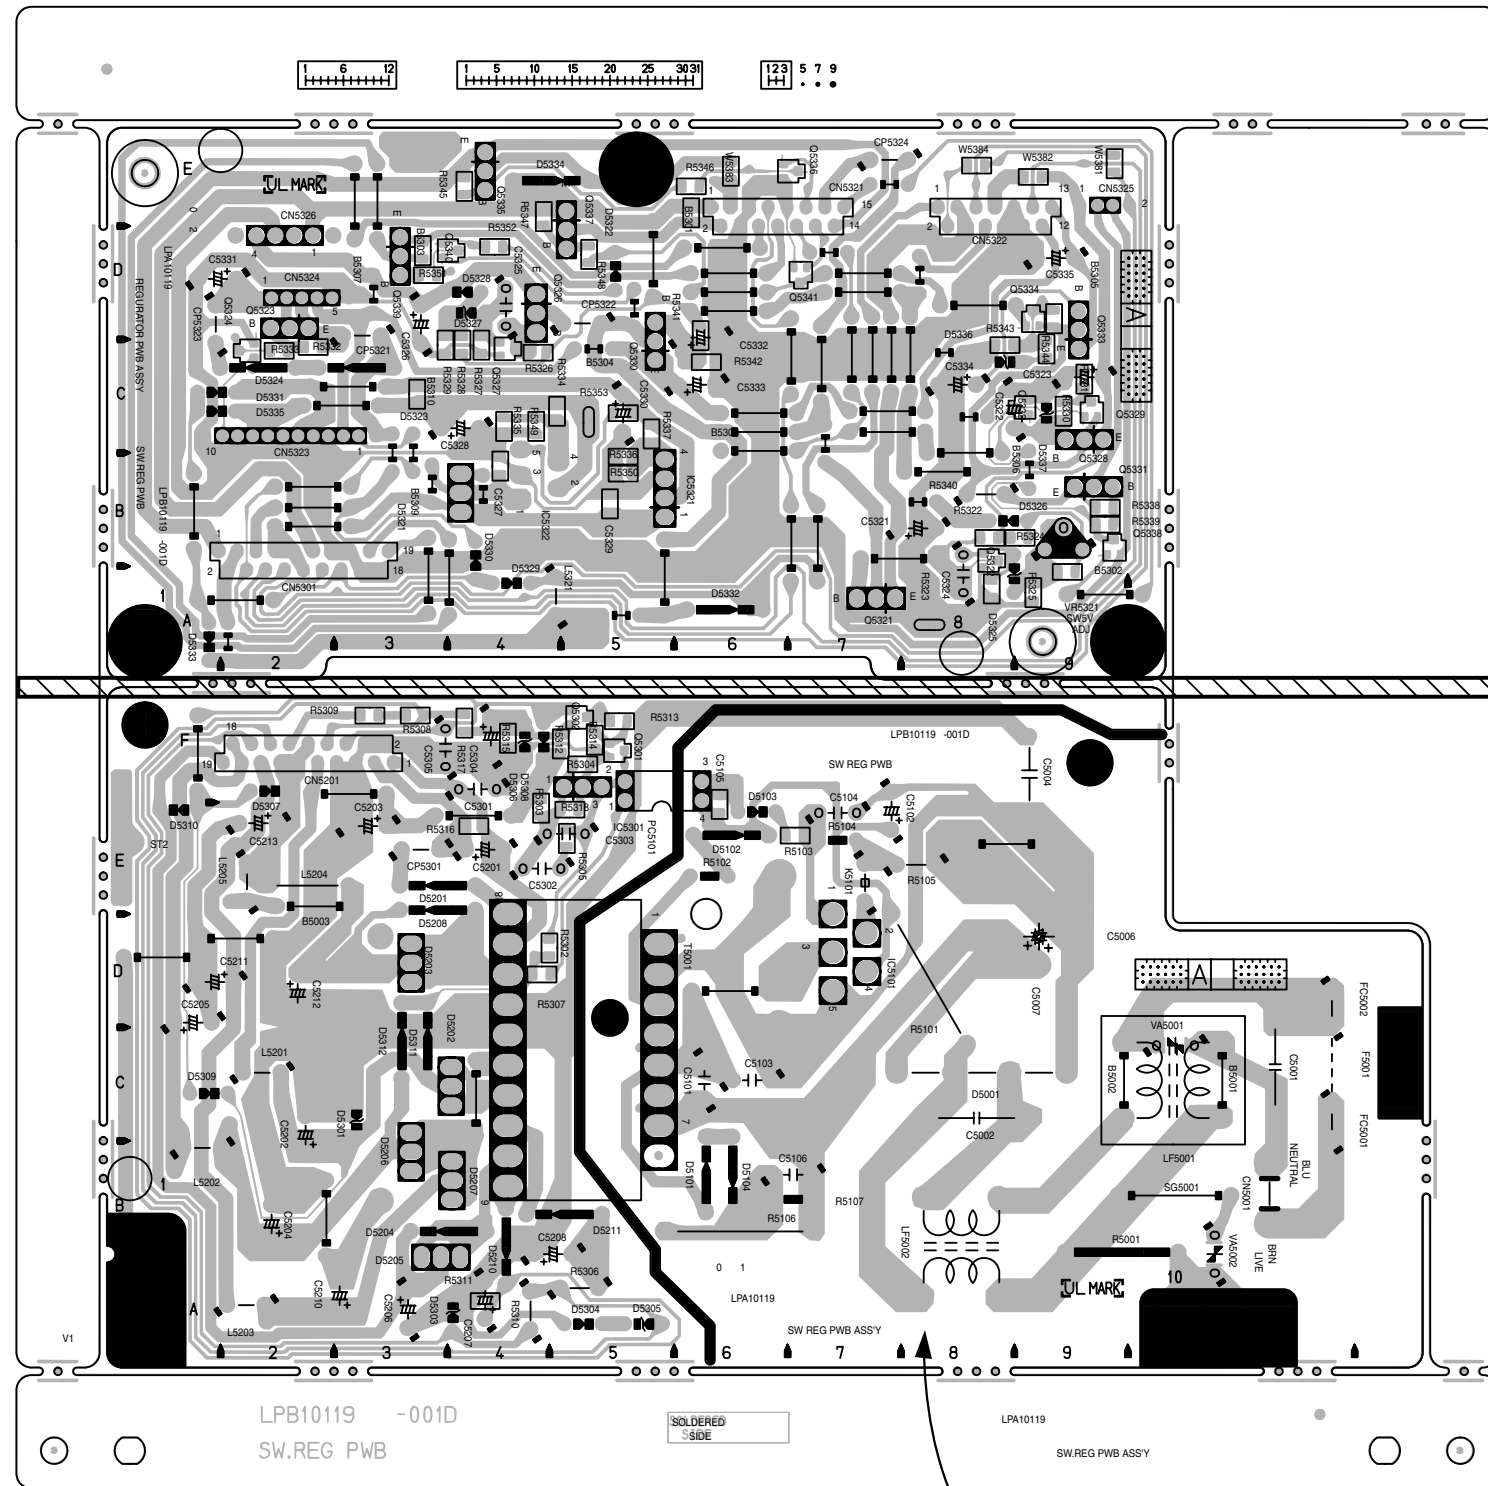

COMPONENT PARTS LOCATION GUIDE <SWITCHING REGULATOR>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR		CONNECTOR		D5311	A D 3C	R5306	A D 5A
C5001	A D 11D	CN5001	A D 11B	D5312	A D 3C	R5307	B C 4D
C5002	A D 8C	CN5201	A D 3F	IC			
C5004	A D 9E	DIODE				IC5101	A D 7E
C5006	A D 8D	D5001	A D 7C	IC5301	A D 5F	R5309	B C 3F
C5007	A D 9D	D5101	A D 6B	COIL			
C5101	A D 6C	D5102	A D 6E	L5201	A D 2C	R5310	A D 4A
C5102	A D 7E	D5103	A D 6E	L5202	A D 2B	R5311	B C 4A
C5103	A D 6C	D5104	A D 6C	L5203	A D 2A	R5312	B C 5F
C5104	A D 7E	D5201	A D 4E	L5204	A D 3E	R5313	B C 5F
C5105	B C 6E	D5202	A D 4C	L5205	A D 2E	R5314	B C 5F
C5106	A D 6B	D5203	A D 3D	TRANSISTOR			
C5201	A D 4E	D5204	A D 3A	Q5301	B C 5F	OTHER	
C5202	A D 2B	D5205	A D 4B	Q5302	B C 5F	CP5301	A D 3E
C5203	A D 3E	D5206	A D 3B	RESISTOR			
C5204	A D 2B	D5207	A D 4B	R5001	A D 9B	F5001	A D 11C
C5205	A D 1D	D5208	A D 4E	R5101	A D 8C	FC5001	A D 11D
C5206	A D 3A	D5210	A D 4B	R5102	A D 6E	K5101	A D 7E
C5207	A D 4A	D5211	A D 5B	R5103	B C 7E	LF5001	A D 10C
C5208	A D 4B	D5301	A D 3C	R5104	A D 7E	PC5101	A D 5F
C5210	A D 3A	D5303	A D 4A	R5105	A D 7E	SG5001	A D 9B
C5211	A D 2D	D5304	A D 5A	R5106	A D 5B	T5001	A D 5D
C5212	A D 2D	D5305	A D 5A	R5107	A D 7B	VA5001	A D 10C
C5213	A D 2E	D5306	A D 4F	R5302	B C 4D	VA5002	A D 10A
C5301	A D 4F	D5307	A D 2F	R5303	B C 4E		
C5302	A D 5E	D5308	A D 4F	R5304	B C 5F		
C5303	A D 5E	D5309	A D 1C	R5305	B C 5E		
C5304	A D 4F	D5310	A D 1E				
C5305	A D 3F						


COMPONENT PARTS LOCATION GUIDE <REGULATOR>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR		D5323	A D 3C	Q5328	A D 9C	R5335	B C 4C
C5321	A D 7B	D5324	A D 2C	Q5329	B C 9C	R5336	B C 5B
C5322	A D 9C	D5325	A D 9B	Q5330	A D 5C	R5337	B C 5C
C5323	A D 9C	D5326	A D 9B	Q5331	A D 9B	R5338	B C 9B
C5324	A D 8A	D5327	A D 4D	Q5332	B C 9C	R5339	B C 9B
C5325	A D 4D	D5328	A D 4D	Q5333	A D 9C	R5340	A D 8B
C5326	A D 3D	D5329	A D 4A	Q5334	B C 9D	R5341	B C 6D
C5327	B C 4B	D5330	A D 4A	Q5335	A D 4E	R5342	B C 6C
C5328	A D 3C	D5331	A D 1C	Q5336	A D 5E	R5343	B C 8C
C5329	B C 5B	D5332	A D 6A	Q5337	A D 5E	R5344	B C 9C
C5330	A D 5C	D5333	A D 1A	Q5338	B C 9B	R5345	B C 4E
C5331	A D 2D	D5334	A D 4E	Q5339	A D 3D	R5346	B C 6E
C5332	A D 6D	D5335	A D 1C	Q5340	B C 4D	R5347	B C 4E
C5333	A D 6C	D5336	A D 8C	Q5341	B C 7D	R5348	B C 5D
C5334	A D 8C	D5337	A D 9C	RESISTOR			
C5335	A D 9D	IC				R5322	B C 8B
CONNECTOR		IC5321	A D 5B	R5323	B C 8A	R5351	B C 3D
CN5301	A D 1B	IC5322	A D 4B	R5324	B C 9B	R5352	B C 4D
CN5321	A D 6E	COIL				R5325	B C 9A
CN5322	A D 8E	L5321	A D 4A	R5326	B C 4C	R5353	B C 5C
CN5323	A D 3C	TRANSISTOR				VR5321	A D 9B
CN5324	A D 2D	Q5321	A D 7A	R5327	B C 4C	OTHER	
CN5325	A D 9E	Q5322	B C 8B	R5328	B C 4C	CP5321	A D 3D
CN5326	A D 2D	Q5323	A D 2D	R5329	B C 3C	CP5322	A D 5D
DIODE		Q5324	B C 2C	R5330	B C 9C	CP5323	A D 1C
D5321	A D 4B	Q5325	A D 4D	R5331	B C 9C	CP5324	A D 8E
D5322	A D 5D	Q5326	A D 4D	R5332	B C 2C		
		Q5327	B C 4C	R5333	B C 2C		
				R5334	B C 4C		


4.26 3D DIGITAL/4M IRCUIT BOARDS

<05> 3D DIGITAL/4M
LPB10104-001B

– FOIL SIDE(B) –

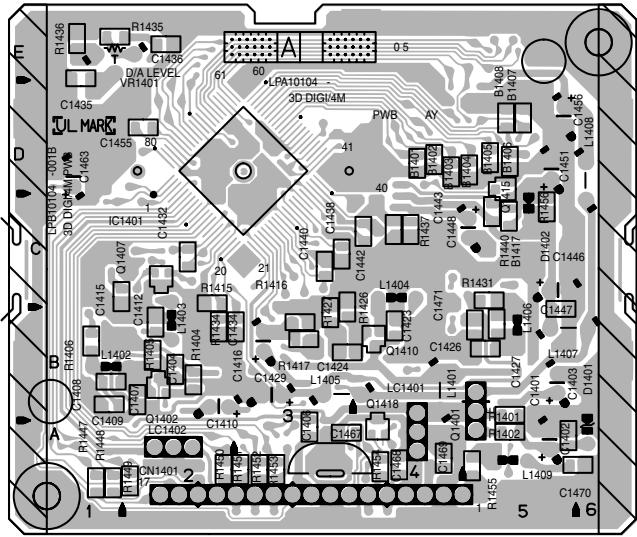

– COMPONENT SIDE(A) –

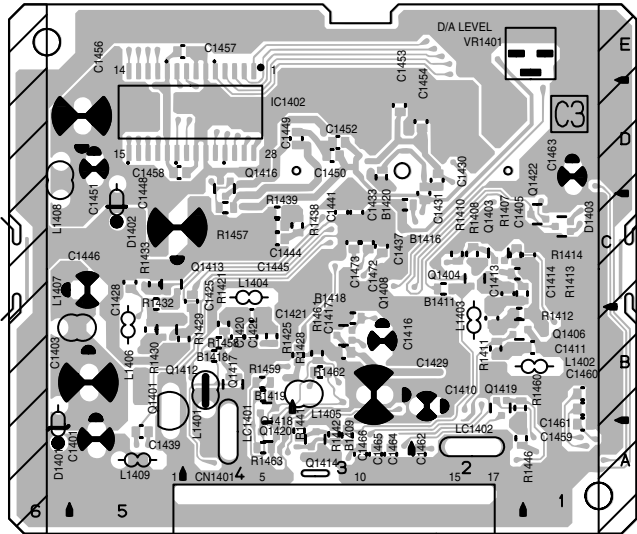


COMPONENT PARTS LOCATION GUIDE <3D DIGITAL/4M>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR					
C1401	A D 5A	C1465	A C 3A	R1414	A C 2C
C1402	B C 5A	C1466	A C 3A	R1415	B C 2C
C1403	A D 5B	C1467	B C 3A	R1416	B C 3B
C1404	B C 2B	C1468	B C 4A	R1417	B C 3B
C1405	A C 1C	C1469	B C 4A	R1418	A C 3B
C1406	B C C 2B	C1470	B C 6A	R1421	A C 4B
C1407	B C C 2B	C1471	B C 5B	R1425	A C 4B
C1408	B C C 1B	C1472	A C 3C	R1426	B C 3C
C1409	B C C 1B	C1473	A C 3C	R1427	B C 3C
C1410	A D 2B			R1428	A C 3B
C1411	A C 1B	CONNECTOR			
C1412	B C 2B	CN1401	A D 5A	R1429	A C 4B
C1413	A C 2C			R1430	A C 5B
C1414	A C 2C	DIODE			
C1415	B C 1C	D1401	A D 6B	R1431	B C 5C
C1416	A D 3B	D1402	A D 5D	R1432	A C 5C
C1417	A C 3B	D1403	A C 1C	R1433	A C 5C
C1420	A C 4B	IC			
C1421	A C 4B	IC1401	B C 3D	R1434	B C 2B
C1422	A C 4B	IC1402	A C 4D	R1435	B C 1E
C1423	B C 4B	COIL			
C1424	B C 3B	L1401	A D 4B	R1436	B C 1E
C1425	A C 4C	L1402	A D 1B	R1437	B C 4C
C1426	B C 5B	L1403	A D 2B	R1438	A C 3C
C1427	B C 5B	L1404	A D 4C	R1439	A C 4C
C1428	A C 5C	L1405	A D 4B	R1440	B C 5C
C1429	A D 3B	L1406	A D 5B	R1441	A C 3A
C1430	A C 2D	L1407	A D 6B	R1442	A C 3A
C1431	A C 2D	L1408	A D 5A	R1446	A C 2A
C1432	B C 2C	L1409	A D 6C	R1447	B C 1A
C1433	A C 3C			R1448	B C 1A
C1434	B C 3B	TRANSISTOR			
C1435	B C 1E	Q1401	A D 5B	R1449	B C 2A
C1436	B C 2E	Q1402	B C 2B	R1450	B C 2A
C1437	A C 3C	Q1403	A C 2C	R1451	B C 2A
C1438	B C 3C	Q1404	A C 2C	R1452	B C 3A
C1439	A C 5A	Q1406	A C 2B	R1453	B C 3A
C1440	B C 3C	Q1407	B C 2C	R1454	B C 4A
C1441	A C 3C	Q1408	A C 3B	R1455	B C 5A
C1442	B C 4C	Q1410	B C 4B	R1456	B C 5C
C1443	B C 4C	Q1412	A C 5B	R1457	A C 4B
C1444	A C 4C	Q1413	A C 5C	R1458	A C 4B
C1445	A C 4C	Q1414	A C 3A	R1459	A C 2B
C1446	A D 5C	Q1415	B C 5D	R1460	A C 4B
C1447	B C 5B	Q1416	A C 4D	R1461	A C 3B
C1448	A D 5C	Q1417	A C 4B	R1462	A C 3B
C1449	A C 4D	Q1418	B C 4A	R1463	A C 4A
C1450	A C 3D	Q1419	A C 2B	VR1401	A D 1E
C1451	A D 5D	Q1420	A C 4B		
C1452	A C 3D	Q1421	A C 4B	OTHER	
C1453	A C 3D	Q1422	A C 1C	LC1401	A D 4A
C1454	A C 2D			LC1402	A D 2A
C1455	B C 2D	RESISTOR			
C1456	A D 5D	R1401	B C 5B		
C1457	A C 5E	R1402	B C 5A		
C1458	A C 5D	R1404	B C 2B		
C1459	A C 1A	R1405	B C 2B		
C1460	A C 1B	R1406	B C 1B		
C1461	A C 1B	R1407	A C 2C		
C1462	A C 2A	R1408	A C 2C		
C1463	A D 1D	R1410	A C 2C		
C1464	A C 3A	R1411	A C 2B		
		R1412	A C 2B		
		R1413	A C 2C		

4.27 TERMINAL CIRCUIT BOARD

<06> TERMINAL LPB10115-001B

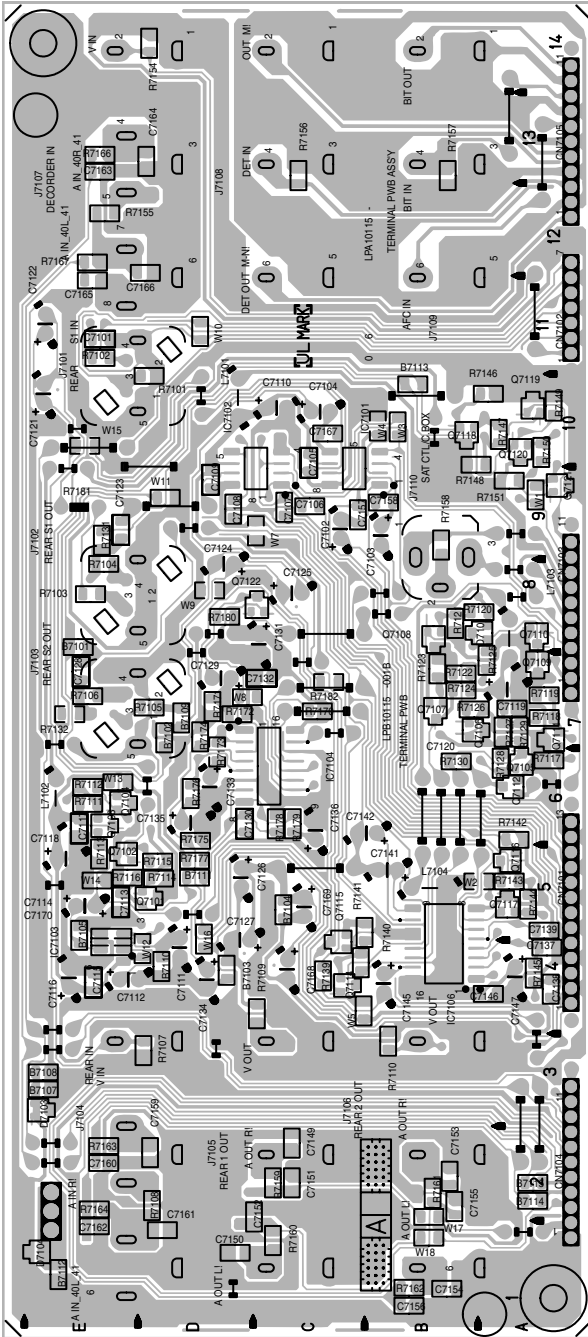


COMPONENT PARTS LOCATION GUIDE

<TERMINAL>


REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR		CONNECTOR		R7111	B C 6E
C7101	B C 10E	CN7101	A D 4A	R7112	B C 6E
C7102	A D 8C	CN7102	A D 10A	R7113	B C 5E
C7103	A D 8B	CN7103	A D 7A	R7114	B C 5D
C7104	A D 10C	CN7104	A D 1A	R7115	B C 5D
C7105	B C 9C	CN7105	A D 11A	R7116	B C 5E
C7106	B C 9C	DIODE		R7117	B C 6A
C7107	B C 9C	D7101	B C 7A	R7118	B C 7A
C7108	B C 9D	D7103	B C 3E	R7119	B C 7A
C7109	B C 9D	D7104	B C 1E	R7120	B C 8A
C7110	A D 10C	IC		R7121	B C 7B
C7111	A D 4D	IC7101	B C 9C	R7122	B C 7B
C7112	A D 4E	IC7102	B C 9C	R7123	B C 7B
C7113	B C 5E	IC7103	B C 4E	R7124	B C 7B
C7114	A D 5E	IC7104	B C 6C	R7125	B C 7A
C7115	B C 4E	IC7106	B C 4B	R7126	B C 7B
C7116	A D 4E	JACK		R7127	B C 6A
C7117	B C 5E	J7101	A D 10E	R7128	B C 6A
C7118	A D 5E	J7102	A D 8E	R7129	B C 6A
C7119	B C 7A	J7103	A D 7E	R7130	B C 6B
C7120	A D 7A	J7104	A D 2E	R7131	B C 8E
C7121	A D 10E	J7105	A D 2C	R7132	B C 7E
C7122	A D 10E	J7106	A D 2B	R7139	B C 4C
C7123	B C 8E	J7107	A D 12E	R7140	B C 4C
C7124	A D 8D	J7108	A D 12C	R7141	B C 4C
C7125	A D 8C	J7109	A D 12B	R7142	B C 5A
C7126	A D 5D	J7110	A D 8B	R7143	B C 5A
C7127	A D 4D	COIL		R7144	B C 5A
C7128	B C 7E	L7101	A D 10D	R7145	B C 4A
C7129	A D 7D	L7102	A D 6E	R7146	B C 10A
C7130	B C 6D	L7103	A D 8A	R7147	B C 9A
C7131	A D 7C	L7104	A D 5B	R7148	B C 9B
C7132	B C 7C	TRANSISTOR		R7149	B C 10A
C7133	A D 6D	Q7101	B C 5D	R7150	B C 9A
C7134	A D 4D	Q7102	B C 5E	R7151	B C 9A
C7135	A D 6D	Q7103	B C 6E	R7154	B C 13D
C7136	A D 5C	Q7104	B C 6E	R7155	B C 12E
C7137	B C 4A	Q7105	B C 6A	R7156	B C 12C
C7138	B C 4A	Q7106	B C 6B	R7157	B C 12B
C7139	B C 4A	Q7107	B C 7B	R7158	B C 8B
C7141	A D 5B	Q7108	B C 7B	R7159	B C 2C
C7142	A D 5B	Q7109	B C 7A	R7160	B C 1C
C7145	A D 4B	Q7110	B C 7A	R7161	B C 2B
C7146	B C 4A	Q7111	B C 6A	R7162	B C 1B
C7147	A D 4A	Q7112	B C 6A	R7163	B C 2E
C7149	B C 2C	Q7114	B C 4C	R7164	B C 2E
C7150	B C 1D	Q7115	B C 4C	R7166	B C 12E
C7151	B C 2C	Q7116	B C 5A	R7167	B C 11E
C7152	B C 2C	Q7117	B C 5A	R7170	B C 7C
C7153	B C 2B	Q7118	B C 9B	R7171	B C 7D
C7154	B C 1B	Q7119	B C 10A	R7172	B C 7D
C7155	B C 2B	Q7120	B C 9A	R7173	B C 6D
C7156	B C 1B	Q7121	B C 9A	R7174	B C 6D
C7157	B C 9C	Q7122	B C 8C	R7175	B C 5D
C7158	B C 9B	RESISTOR		R7176	B C 6D
C7159	B C 2D	R7101	B C 10D	R7177	B C 5D
C7160	B C 2E	R7102	B C 10E	R7178	B C 6C
C7161	B C 2D	R7103	B C 8E	R7179	B C 6C
C7162	B C 2E	R7104	B C 8E	R7180	B C 8D
C7163	B C 12E	R7105	B C 7D	R7181	A D 9E
C7164	B C 12D	R7106	B C 7E	R7182	B C 7C
C7165	B C 11E	R7107	B C 3D		
C7166	B C 11D	R7108	B C 2D		
C7167	B C 9C	R7109	B C 4C		
C7168	A D 4C	R7110	B C 3B		
C7169	A D 5C				
C7170	A D 5E				

4.28 S-SUB AND DISPLAY, EJECT SW, JACK, LED/SW, JOG CIRCUIT BOARDS

<27> EJECT SW, <28> DISPLAY, <36> JACK, <47> LED/SW, <85> JOG
LPB10126-001C

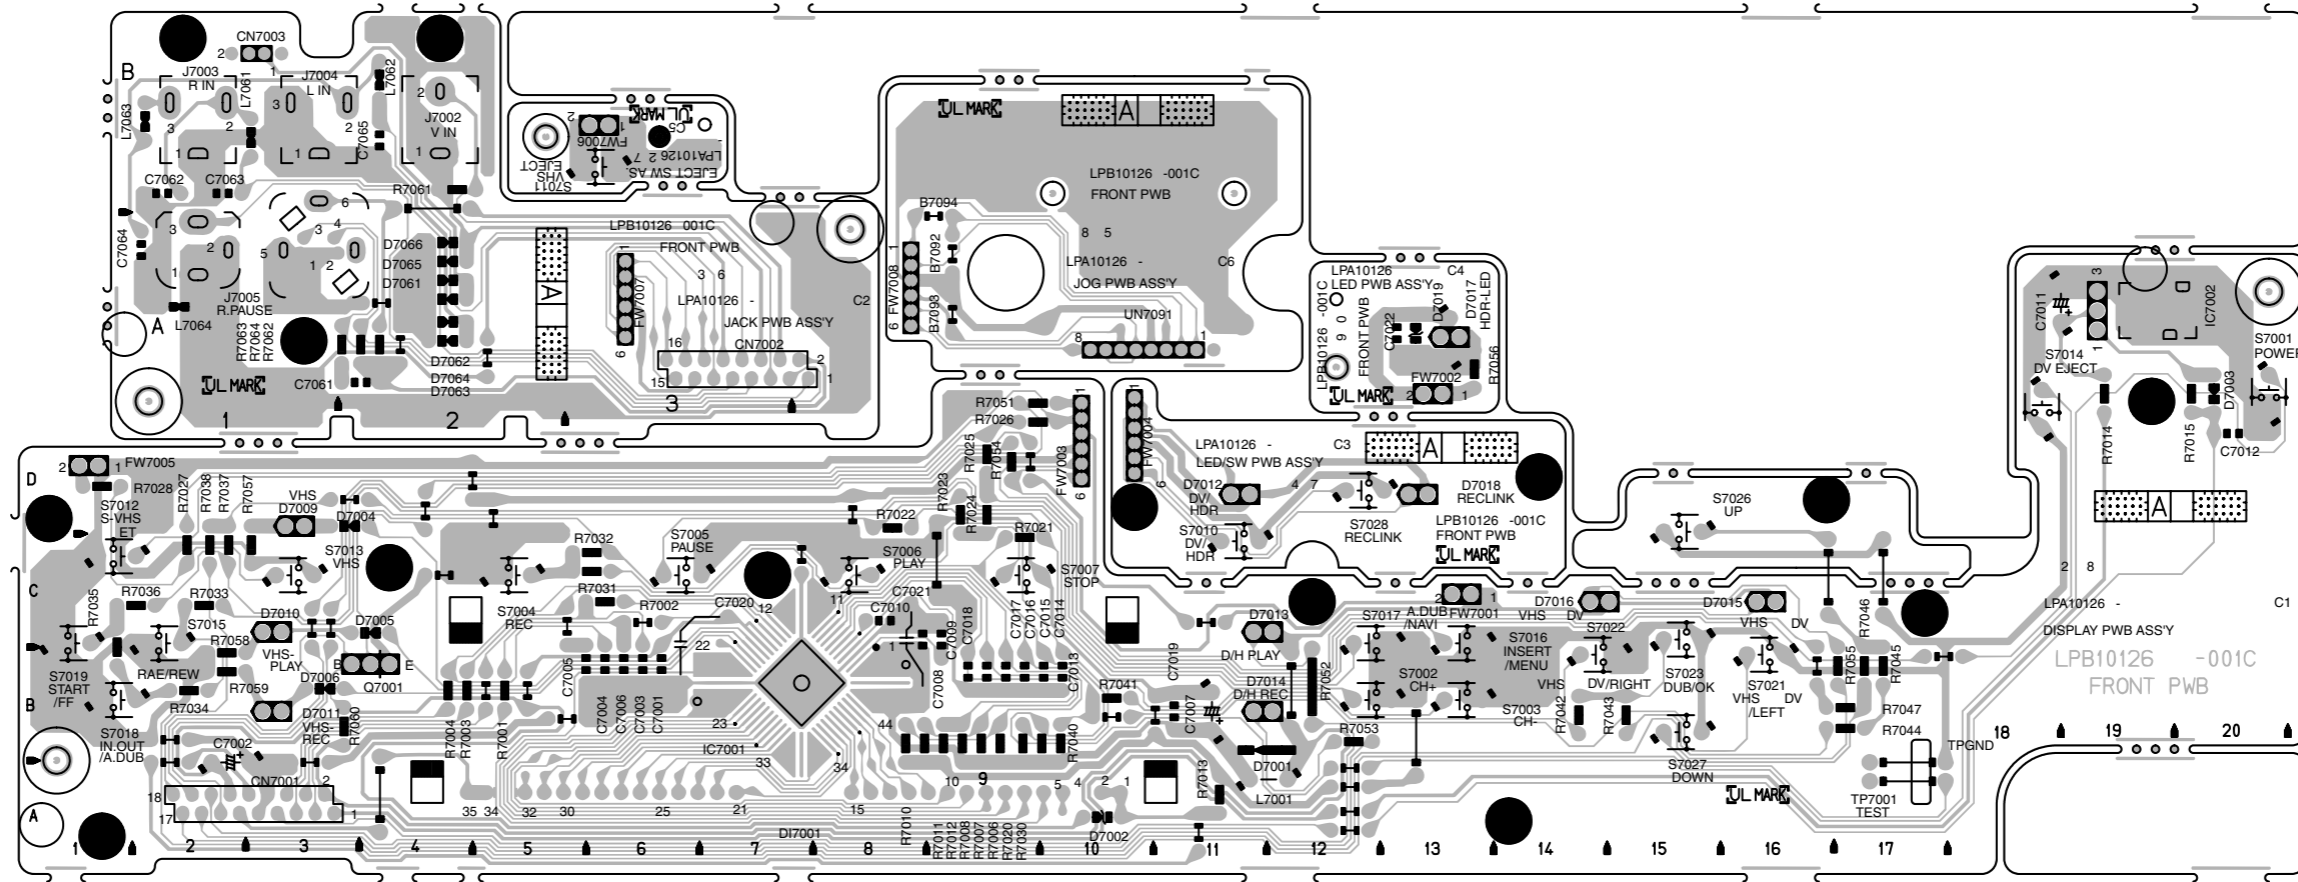

<15> S-SUB
LPB10103-001A

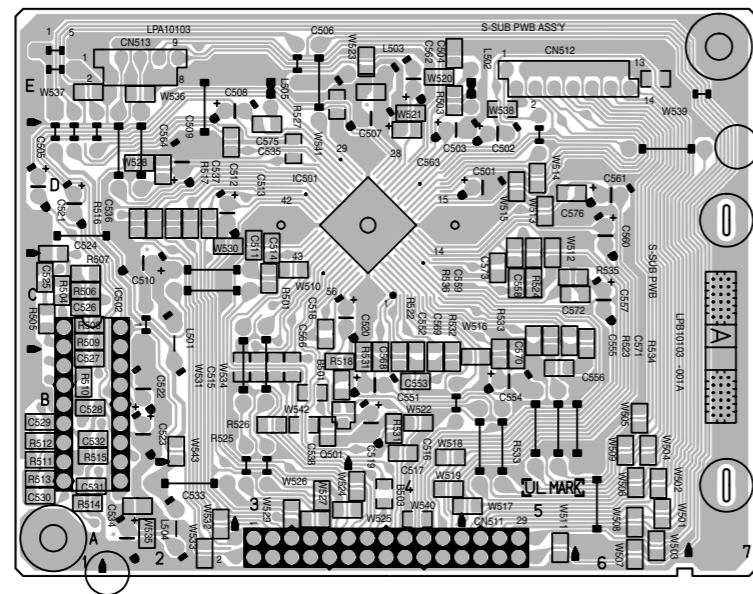


COPONENT PARTS LOCATION GUIDE <S-SUB>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR					
C501	A D 5D	C555	B C 5C	R508	B C 1C
C502	A D 5D	C556	B C 5B	R509	B C 1C
C503	A D 4D	C557	A D 6C	R510	B C 1B
C504	B C 4E	C558	B C 5C	R511	B C 1B
C505	A D 1D	C559	B C 5C	R512	B C 1B
C506	B C 4E	C560	A D 6D	R513	B C 1A
C507	A D 4E	C561	A D 6D	R514	B C 1A
C508	A D 2E	C562	A D 4E	R515	B C 1B
C509	A D 2D	C563	B C 4D	R516	B C 2D
C510	A D 2C	C564	B C 2D	R517	B C 2D
C511	B C 3C	C565	B C 3B	R518	B C 3B
C512	B C 2D	C566	B C 4B	R522	B C 4B
C513	A D 2D	C567	B C 5B	R523	B C 5C
C514	B C 3C	C568	B C 4B	R524	B C 5C
C515	B C 3B	C569	B C 4B	R525	B C 3B
C516	B C 4B	C570	B C 5B	R526	B C 3B
C517	B C 4B	C571	B C 5C	R527	B C 3D
C518	B C 4B	C572	B C 5C	R531	B C 4B
C519	B C 3C	C573	B C 3D	R532	B C 4B
C520	A D 4B	C574	B C 5D	R533	B C 5B
C521	A D 1D	C575	B C 5D	R534	B C 6C
C522	A D 2B	C576	B C 5D	R535	B C 5C
C523	A D 2B			R536	B C 5C
C524	B C 1C	CONNECTOR			
C525	B C 1C	CN511	A D 3A		
C526	B C 1C	CN512	A D 5E		
C527	B C 1B	CN513	A D 1E		
C528	B C 1B	IC			
C529	B C 1B	IC501	B C 4D		
C530	B C 1A	IC502	A D 1C		
C531	B C 1A	COIL			
C532	B C 1B	L501	A D 2B		
C533	B C 2A	L502	A D 5E		
C534	A D 2A	L503	A D 3E		
C535	B C 2D	L504	A D 2A		
C536	B C 2D	L505	A D 3E		
C537	B C 2D	TRANSISTOR			
C538	B C 3B	Q501	B C 3B		
C551	A D 4B	RESISTOR			
C552	B C 4B	R501	B C 3C		
C553	B C 4B	R503	B C 4E		
C554	A D 5B	R504	B C 1C		
		R505	B C 1C		
		R506	B C 1C		
		R507	B C 1C		

4.29 MAIN CIRCUIT BOARD

<03> MAIN
LPB10113-001D

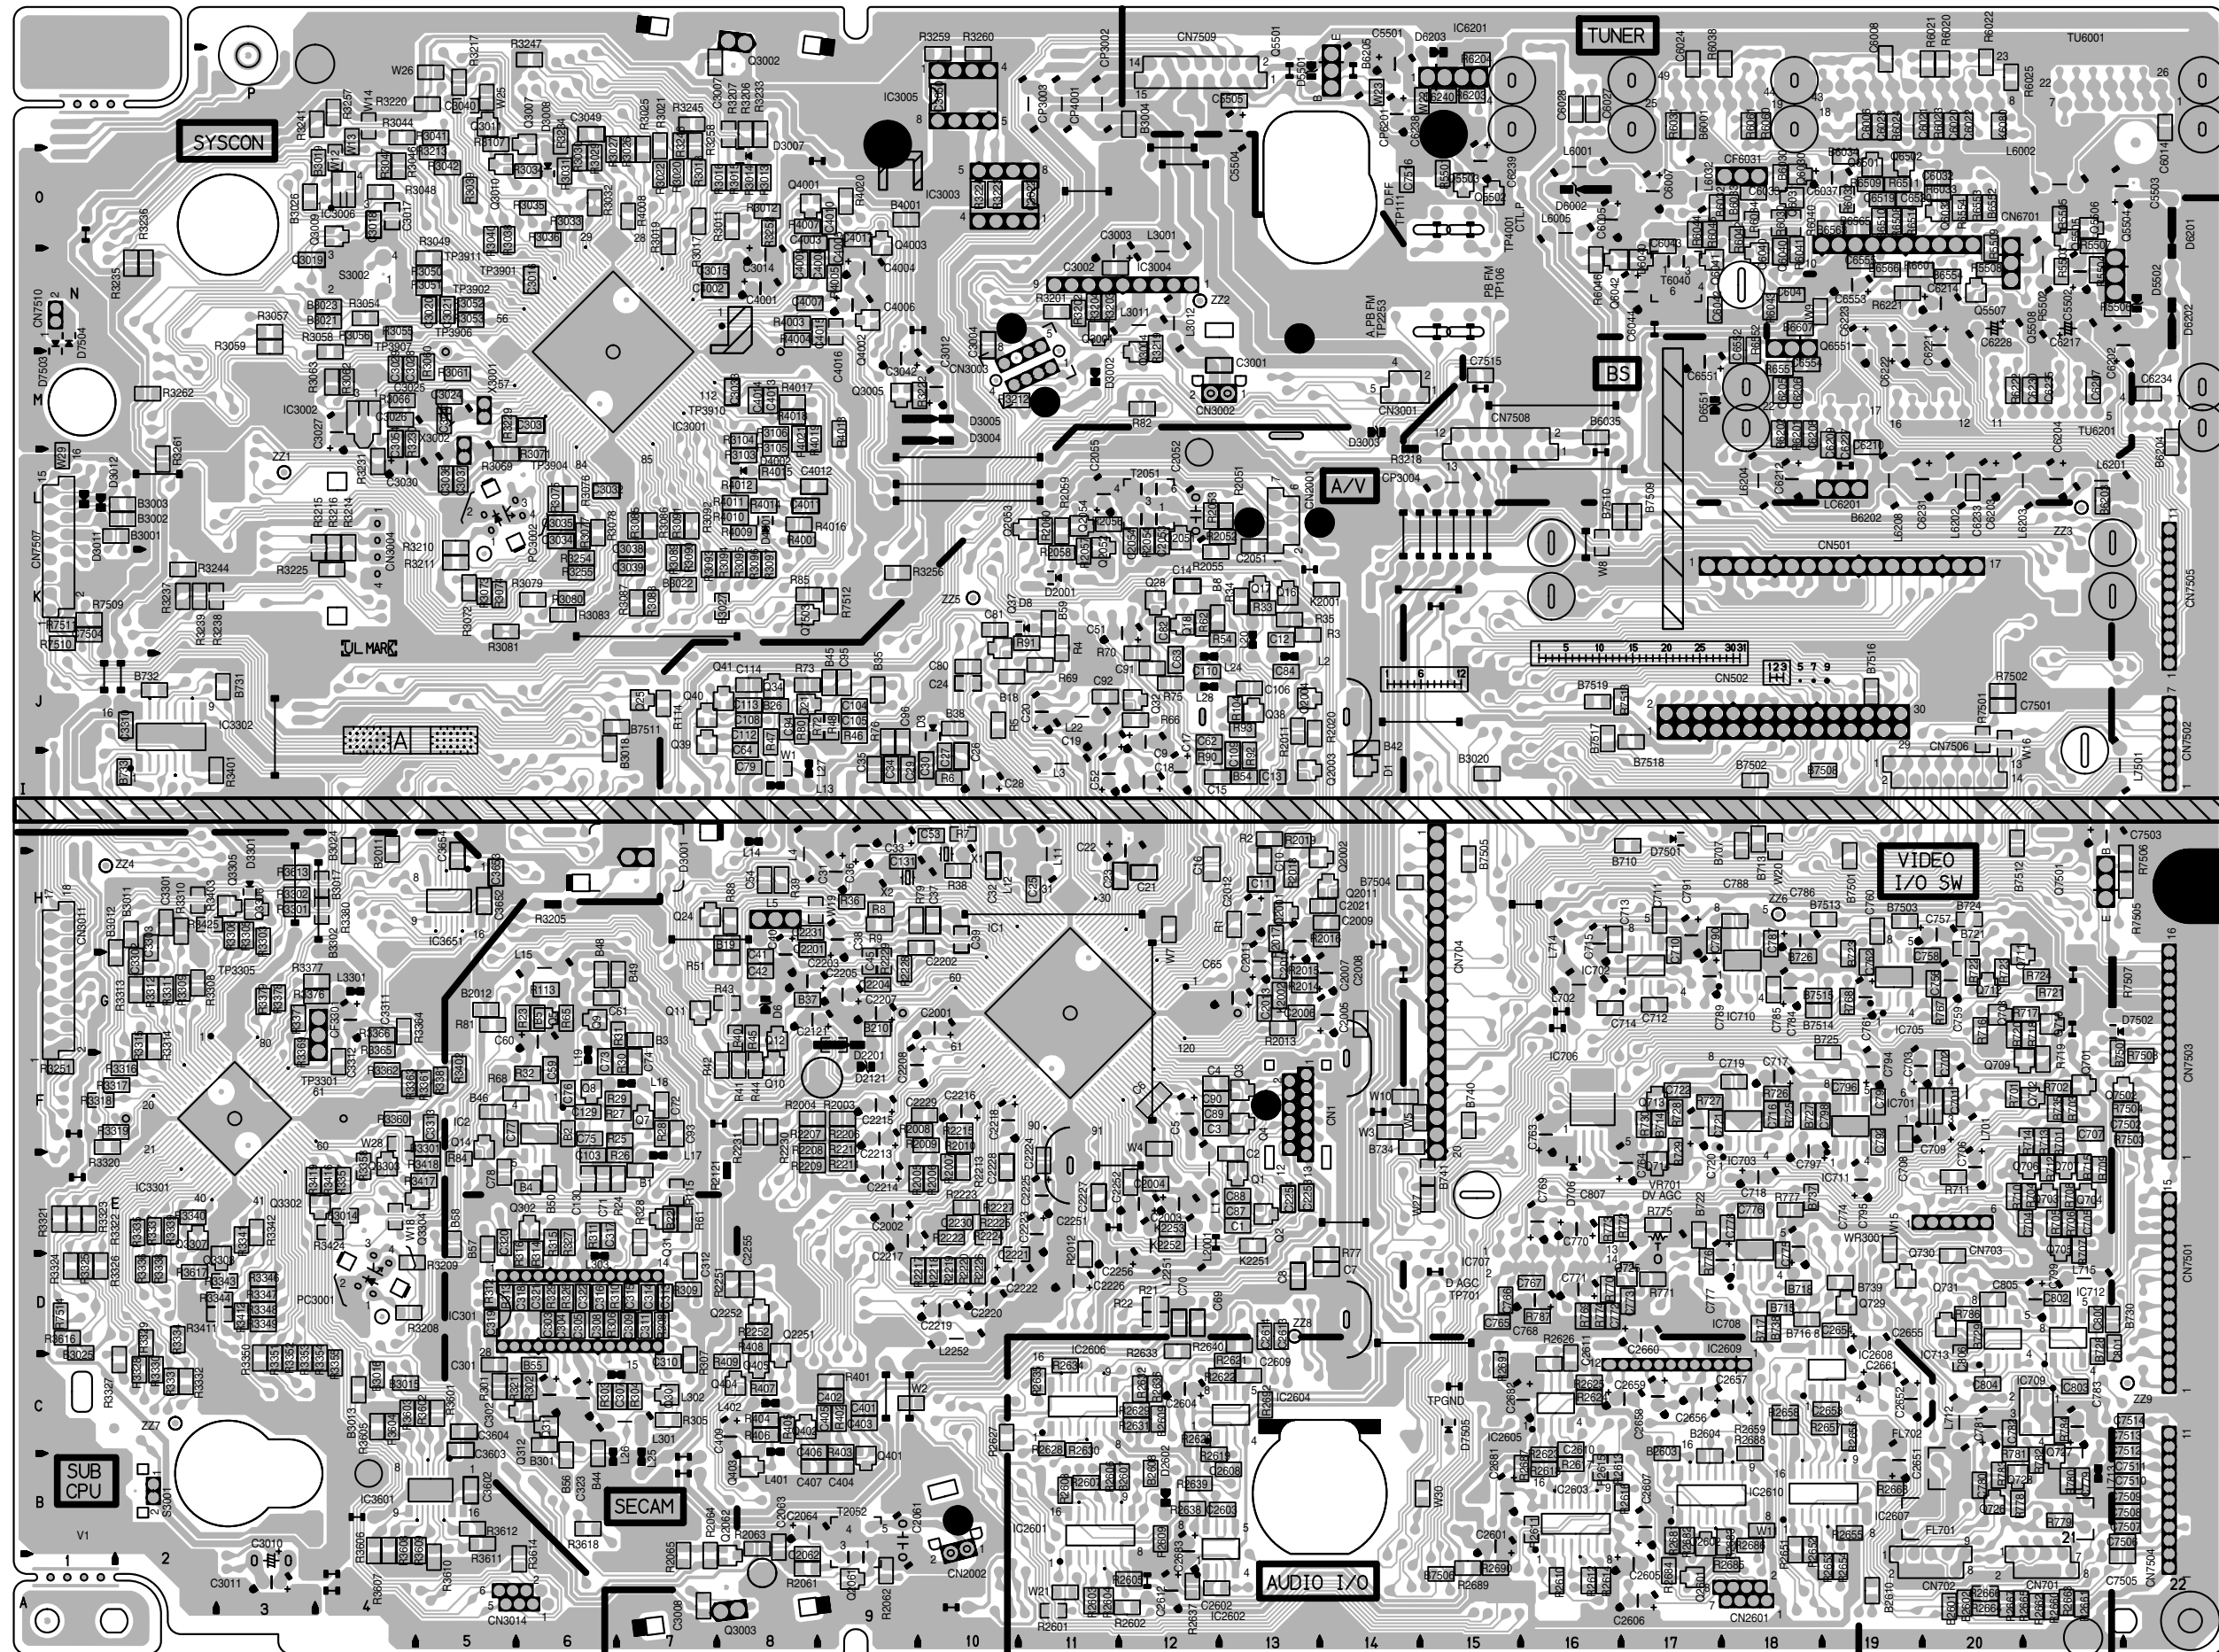


COMPONENT PARTS LOCATION GUIDE <MAIN>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
CAPACITOR															
C1	B	C	13E	C712	B	C	17G	C2652	A	D	19C	C6520	B	C	180
C2	B	C	13E	C713	B	C	16H	C2653	A	D	19C	C6551	B	C	17M
C3	B	C	12F	C714	B	C	16H	C2654	A	D	19C	C6552	B	C	18M
C4	B	C	12F	C715	A	D	19C	C2655	A	D	19C	C6553	B	C	18N
C5	A	D	12F	C716	A	D	18C	C2656	A	D	18C	C6554	B	C	18N
C6	B	C	14D	C717	A	D	18F	C2657	A	D	17C	C6555	B	C	19N
C7	B	C	14D	C718	D	E	18E	C2658	A	D	17C	C6556	B	C	19N
C8	A	D	13J	C719	D	E	17F	C2659	A	D	16C	C7502	B	C	22F
C9	A	D	13J	C720	A	D	17D	C2660	A	D	17D	C7503	B	C	21L
C10	A	D	12J	C721	A	D	17F	C2661	A	D	17C	C7504	B	C	21L
C11	A	D	13H	C722	B	C	17F	C2662	A	D	15B	C7505	B	C	21A
C12	B	C	13K	C723	A	D	18C	C2663	A	D	18C	C7506	B	C	21B
C13	B	C	13K	C724	A	D	18C	C2664	A	D	18C	C7507	B	C	22B
C14	B	C	12K	C725	A	D	20G	C3001	B	C	13M	C7508	B	C	22B
C15	B	C	12I	C726	A	D	20G	C3002	B	C	11N	C7509	B	C	22B
C16	B	C	12I	C727	A	D	19H	C3003	A	D	12N	C7510	B	C	22B
C17	A	D	12I	C728	A	D	19G	C3004	B	C	10N	C7511	B	C	22B
C18	A	D	12I	C729	A	D	19G	C3005	B	C	7F	C7512	B	C	22C
C19	A	D	11J	C730	A	D	17E	C3006	B	C	7A	C7513	B	C	22C
C20	A	D	11J	C731	A	D	17E	C3007	A	D	3A	C7514	B	C	22C
C21	B	C	12H	C732	B	C	15D	C3011	A	D	3A	C7515	B	C	15M
C22	A	D	11I	C733	B	C	15D	C3012	A	D	3A	C7516	B	C	15M
C23	A	D	11I	C734	A	D	16D	C3014	A	D	8N				
C24	A	D	10J	C735	A	D	16D	C3015	A	D	8N				
C25	B	C	11H	C736	A	D	16E	C3016	B	C	40				
C26	B	C	11H	C737	A	D	16E	C3017	B	C	40				
C27	B	C	10I	C738	A	D	16E	C3018	B	C	40				
C28	A	D	10I	C739	B	C	16E	C3019	B	C	3N				
C29	A	D	10I	C740	B	C	17D	C3020	B	C	3N				
C30	B	C	9H	C741	A	D	17H	C3021	A	D	19E				
C31	A	D	9H	C742	B	C	18D	C3022	B	C	11O				
C32	B	C	9H	C743	B	C	18D	C3023	B	C	11O				
C33	B	C	10H	C744	B	C	18E	C3024	B	C	5M				
C34	A	D	9H	C745	B	C	18E	C3025	B	C	4M				
C35	B	C	9H	C746	B	C	18E	C3026	B	C	4M				
C36	B	C	9H	C747	B	C	18E	C3027	B	C	4M				
C37	B	C	10H	C748	B	C	20C	C3028	A	D	4L				
C38	A	D	9H	C749	A	D	21C	C3031	A	D	6M				
C39	A	D	10H	C750	A	D	18G	C3032	B	C	6M				
C40	A	D	8H	C751	A	D	18H	C3033	B	C	6M				
C41	A	D	8H	C752	A	D	18H	C3034	B	C	6M				
C42	A	D	8H	C753	A	D	18H	C3035	B	C	6M				
C43	A	D	8H	C754	A	D	18H	C3036	B	C	6M				
C44	B	C	9G	C755	B	C	18H	C3037	B	C	5L				
C45	B	C	9G	C756	B	C	18H	C3038	B	C	5L				
C46	A	D	12K	C757	A	D	17H	C3039	B	C	7L				
C47	A	D	11I	C758	A	D	17H	C3040	B	C	7L				
C48	A	D	11I	C759	A	D	17H	C3041	B	C	7L				
C49	A	D	11I	C760	A	D	17H	C3042	B	C	5P				
C50	A	D	8H	C761	B	C	19F	C3043	A	D	16L				
C51	B	C	9H	C762	B	C	19F	C3044	B	C	5M				
C52	B	C	9H	C763	B	C	19F	C3045	B	C	5M				
C53	B	C	9H	C764	B	C	19F	C3046	B	C	5M				
C54	B	C	9H	C765	B	C	19F	C3047	B	C	5M				
C55	B	C	9H	C766	B	C	19F	C3048	B	C	5M				
C56	B	C	9H	C767	B	C	19F	C3049	B	C	5M				
C57	B	C	9H	C768	B	C	19F	C3050	B	C	10M				
C58	B	C	9H	C769	B	C	19F	C3051	B	C	4M				
C59	B	C	9H	C770	B	C	19F	C3052	B	C	4M				
C60	A	D	6G	C771	A	D	19F	C3042	B	C	9M				
C61	B	C	6G	C772	B	C	19E	C3049	B	C	6P				
C62	B	C	12J	C773	B	C	19F	C3050	B	C	6P				
C63	B	C	12J	C774	B	C	19F	C3051	B	C	4M				
C64	B	C	12J	C775	B	C	19F	C3052	B	C	4M				
C65	B	C	13C	C776	B	C	21D	C3032	B	C	2G				
C66	B	C	13C	C777	B	C	21D	C3033	B	C	2G				
C67	B	C	12D	C778	B	C	21D	C3310	A	D	4J				
C68	B	C	12D	C779	B	C	21D	C3311	A	D	2G				
C69	B	C	12D	C780	B	C	21C	C3312	A	D	11K				
C70	B	C	12D	C781	B	C	21D	C3313	B	C	5F				
C71	B	C	6E	C782	B	C	20C	C313	B	C	5F				
C72	B	C	7F	C783	B	C	20C	C313	B	C	5F				
C73	B	C	7F	C784	B	C	20C	C313	B	C	5F				
C74	B	C	7F	C785	B	C	20C	C313	B	C	5F				
C75	B	C	6F	C786	B	C	20C	C3603	B	C	5C				
C76	B	C	6F	C787	B	C	20C	C3604	B	C	5C				
C77	B	C	5F	C788	B	C	20C	C3605	B	C	5C				
C78	B	C	5F	C789	B	C	20C	C3606	B	C	5C				
C79	B	C	10J	C2004	A	D	12E	C4001	A	D	8M				
C80	B	C	10J	C2005	A	D	12E	C4002	A	D	7N				
C81	B	C	10J	C2006	A	D	12E	C4003	A	D	8M				
C82	B	C	12K	C2007	A	D	13G	C4004	B	C	8O				
C83	B	C	13J	C2008	A	D	13H	C4005	B	C	9L				
C84	B	C	13E	C2009	A	D	14G	C4006	A	D	9M				
C85	B	C	13E	C2010	A	D	14G	C4007	A	D	9M				
C86	B	C	12F	C2011	A	D	13G	C4008	B	C	8N				
C87	B	C	12F	C2012	A	D	13H	C4009	B	C	8N				
C88	B	C	11J	C2013	A	D	14H	C4010	B	C	9L				
C89	B	C	11J	C2014	A	D	14H	C4011	B	C	8L				
C90	B	C	8J	C2015	B	C	13L	C4012	B	C	8L				
C91	B	C	8J	C2016	B	C	12L	C4013	B	C	8M				
C92	B	C	9J	C2017	B	C	12L	C4014	B	C	8M				
C93	B	C	9J	C2018	B	C	12L	C4015	B	C	8M				
C94	B	C	9J	C2019	B	C	12L	C4016	B	C	8M				
C95	B	C	9J	C2020	B	C	12L	C4017	B	C	8M				
C96	B	C	9J	C2021	B	C	12L	C4018	B	C	8M				
C97	B	C	9J	C2022	B	C	12L	C4019	B	C	8M				
C98	B	C	9J	C2023	B	C	12L	C4020	B	C	8M				
C99	B	C	9J	C2024	B	C	12L	C4021	B	C	8M				
C100	B	C	9J	C2025	B	C	12L	C4022	B	C	8M				
C101	B	C	9J	C2026	B	C	12L	C4023	B	C	8M				
C102	B	C	9J	C2027	B	C	12L	C4024	B	C	8M				
C103	B	C	9J	C2028	B	C	12L	C4025	B	C	8M				
C104	B	C	9J	C2029	B	C	12L	C4026	B	C	8M				
C105	B	C	9J	C2030	B	C	12L	C4027	B	C	8M				
C106	B	C	13J	C2063	B	C	8B	C5501	A	D	14P				
C107	B	C	13J	C2064	B	C	8B	C5502	A	D	21N				
C108	B	C	13J	C2065	B	C	8B	C5503	A	D	21O				
C109	B	C	13J	C2066	B	C	8B	C5504	A	D	13F				
C110	B	C	8J	C2201	B	C	10H	C6005	B	C	16O				
C111	B	C	8J	C2202	B	C	10H	C6006	B	C	16P				
C112	B	C	8J	C2203	B	C	9G	C6007	B	C	17O				
C113	B	C	6E	C2204	B	C	9G	C6008	B	C	17O				
C114	B	C	6E	C2205	B	C	9G	C6009	B	C	17O				
C115	B	C	6E	C2206	B	C	9G	C6010	B	C	17O				
C116	B	C	6E	C2207	B	C	9G	C6011	B	C	17O				
C117	B	C	6E	C2208	B	C	9G	C6012	B	C	17O				
C118	B	C	6E	C2209	B	C	9G	C6013	B	C	17O				
C119	B	C	6E	C2210	B	C	9G	C6014	B	C	17O				
C120	B	C	6E	C2211	B	C	9G	C6015	B	C	17O				
C121	B	C	6E	C2212	B	C	9G	C6016	B	C	17O				
C122	B	C	6												

4.31 PR/MDA, DV MAIN CIRCUIT BOARDS

<16> P/R MDA, <50> DV MAIN
LPB10117-001C

— FOIL SIDE(B) —

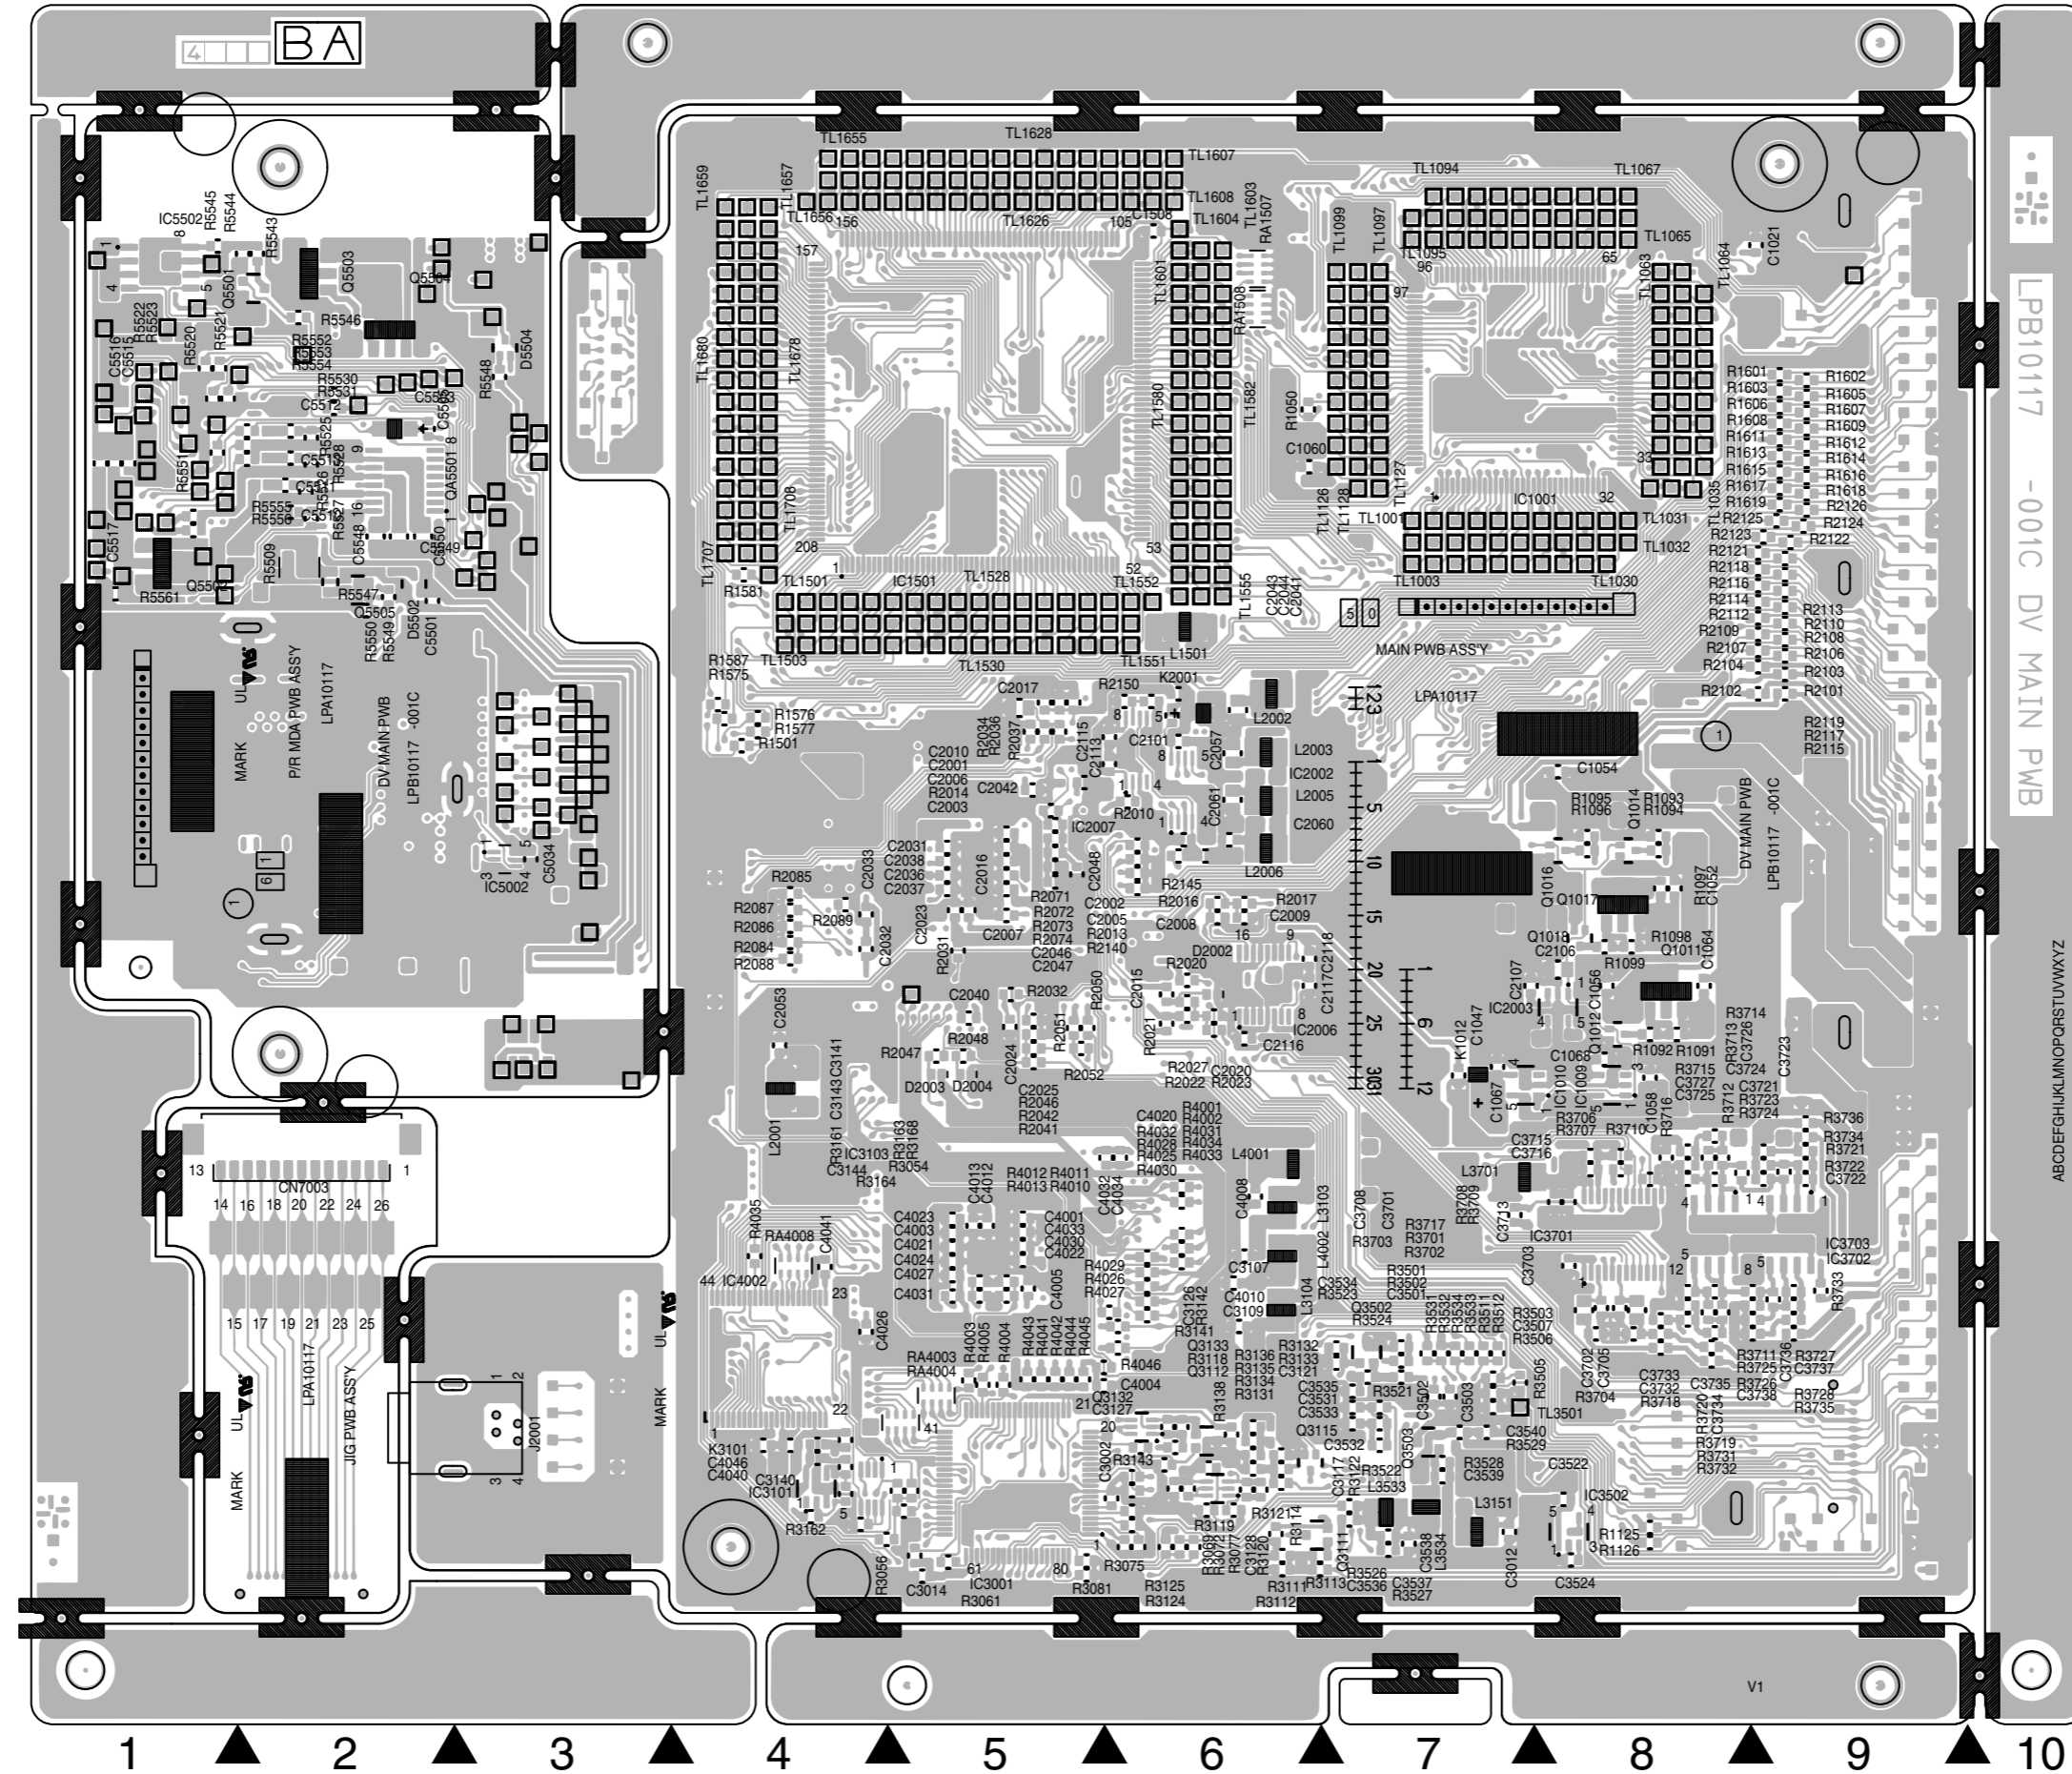

H
▲
G
▲
F
▲
E
▲
D
▲
C
▲
B
▲
A

LPB10117 -001C DV MAIN PWB

ABCDEFGHIJKLMNQRSTUWXYZ


1 ▲ 2 ▲ 3 ▲ 4 ▲ 5 ▲ 6 ▲ 7 ▲ 8 ▲ 9 ▲ 10

COMPONENT PARTS LOCATION GUIDE <DV MAIN>

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION																			
CAPACITOR																																						
C1001	A	7H	C2041	B	C	5G	C3508	A	C	7B	C4046	B	C	3B	Q1002	A	C	8J	R1100	A	C	8D	R1647	A	C	2I	R2126	B	C	9H	R3502	B	C	7C				
C1002	A	8H	C2042	B	C	4F	C3509	A	C	7B	C5053	A	C	2E	Q1011	B	C	8E	R1125	B	C	8B	R1648	A	C	2I	R2128	B	C	5G	R3503	B	C	7C				
C1003	A	8H	C2043	B	C	4G	C3510	A	C	7B	CONNECTOR					Q1012	B	C	8E	R1126	B	C	8B	R1649	A	C	2I	R2139	B	C	5F	R3504	A	C	7B			
C1004	A	8H	C2044	B	C	5G	C3511	A	C	7B	CN1001	A	C	10E	Q1013	A	C	8F	R1501	B	C	3G	R1650	A	C	2I	R2140	B	C	5F	R3505	B	C	7C				
C1005	A	8H	C2046	B	C	4F	C3512	A	C	7B	CN1002	A	C	10I	Q1014	B	C	8F	R1502	A	C	3G	R1651	A	C	2I	R2141	A	C	5F	R3506	B	C	7B				
C1006	A	8I	C2047	B	C	4F	C3513	A	C	7B	CN1101	A	C	9C	Q1015	A	C	8F	R1503	A	C	3H	R1653	A	C	2I	R2142	A	C	5F	R3507	A	C	7B				
C1007	A	8I	C2048	B	C	5F	C3514	A	C	7B	CN1501	A	C	10H	Q1016	B	C	8F	R1504	A	C	3H	R1655	A	C	2I	R2143	A	C	5F	R3508	A	C	7B				
C1008	A	7I	C2051	A	C	6G	C3515	A	C	7C	CN1502	A	C	2I	Q1017	B	C	8F	R1505	A	C	3G	R1661	A	C	3I	R2144	A	C	5E	R3509	A	C	7B				
C1010	A	7I	C2052	B	C	6G	C3520	A	C	8B	CN2001	A	C	10G	Q1018	B	C	8E	R1506	A	C	3G	R1662	A	C	3I	R2145	B	C	5F	R3510	A	C	7B				
C1011	A	7I	C2053	B	C	3E	C3521	A	C	8B	CN3501	A	C	10B	Q1501	A	C	4I	R1514	A	C	3G	R1663	A	C	3I	R2146	A	C	5F	R3511	B	C	7C				
C1021	B	8J	C2054	A	C	3E	C3522	A	C	8B	CN3701	A	C	10C	Q1602	A	C	3I	R1515	A	C	3G	R1665	A	C	3I	R2148	A	C	5F	R3512	B	C	7C				
C1041	A	9H	C2055	A	C	6E	C3523	A	C	8B	DIODE					Q1603	A	C	3I	R1516	A	C	3G	R1666	A	C	4I	R2149	A	C	5F	R3521	B	C	6B			
C1042	A	7I	C2056	A	C	6E	C3524	B	C	8B	D1001	A	C	7H	Q3101	A	C	5A	R1517	A	C	5H	R1667	A	C	3I	R2150	B	C	5G	R3522	B	C	6B				
C1043	A	7I	C2057	A	C	6F	C3525	A	C	8B	D1002	A	C	9I	Q3102	A	C	5B	R1518	A	C	5H	R1668	A	C	3I	R2151	B	C	5G	R3523	B	C	6C				
C1044	A	7H	C2058	A	C	6G	C3531	B	C	8B	D1003	A	C	8H	Q3111	B	C	6B	R1519	A	C	5H	R2009	A	C	5F	R3004	B	C	5B	R3524	B	C	6C				
C1045	A	8H	C2059	A	C	6F	C3532	B	C	6B	D1501	A	C	3H	Q3112	B	C	5B	R1520	A	C	5H	R2010	A	C	5F	R3005	B	C	5B	R3525	B	C	6B				
C1047	B	7E	C2060	B	C	6F	C3533	B	C	6B	D2002	B	C	5E	Q3113	A	C	5B	R1521	A	C	5H	R2011	A	C	5F	R3007	A	C	5B	R3527	B	C	7B				
C1048	A	8D	C2061	B	C	6F	C3534	B	C	6C	D2003	B	C	4E	Q3114	A	C	5B	R1522	A	C	5H	R2012	A	C	5F	R3008	A	C	4B	R3528	B	C	7B				
C1049	A	8D	C2062	A	C	6F	C3535	B	C	6C	D2004	B	C	4E	Q3115	B	C	6B	R1523	A	C	5H	R2013	B	C	5F	R3024	A	C	5B	R3529	B	C	7B				
C1050	A	7D	C2101	B	C	5G	C3536	B	C	6B	IC					Q3121	B	C	5B	R1524	A	C	5H	R2014	B	C	4F	R3025	A	C	5B	R3531	B	C	7C			
C1051	A	8F	C2102	A	C	5F	C3537	B	C	7B	IC1001	B	C	7I	Q3132	B	C	5B	R1525	A	C	5H	R2015	A	C	5F	R3026	A	C	4B	R3532	B	C	7C				
C1052	B	8F	C2103	A	C	5F	C3538	B	C	7B	IC1002	A	C	9J	Q3133	B	C	5B	R1526	A	C	5H	R2016	B	C	5F	R3027	A	C	4B	R3533	B	C	7C				
C1053	A	8F	C2104	A	C	5F	C3539	B	C	7B	IC1003	A	C	6I	Q3501	A	C	6C	R1527	A	C	5H	R2017	B	C	6F	R3028	A	C	4B	R3534	B	C	7C				
C1054	B	8F	C2105	B	C	5G	C3540	B	C	7B	IC1004	A	C	6I	Q3502	B	C	6C	R1528	A	C	5I	R2018	A	C	5F	R3029	A	C	4B	R3701	B	C	8C				
C1055	A	8E	C2106	B	C	8E	C3701	B	C	8C	IC1005	A	C	8I	Q3503	B	C	7B	R1531	A	C	5I	R2019	A	C	5F	R3032	A	C	4B	R3702	B	C	8C				
C1056	B	8E	C2107	B	C	7E	C3702	B	C	8C	IC1006	A	C	8I	RESISTOR					R1535	A	C	4I	R2020	B	C	5E	R3033	A	C	4B	R3703	B	C	8C			
C1057	A	8D	C2108	A	C	7E	C3703	B	C	8C	IC1007	A	C	8I	R1002	A	C	7H	R1536	A	C	4I	R2021	B	C	5E	R3034	A	C	4B	R3704	B	C	8C				
C1058	B	8D	C2109	A	C	7F	C3704	A	C	8C	IC1007	A	C	8I	R1003	A	C	7H	R1537	A	C	4I	R2022	B	C	5E	R3035	A	C	4B	R3705	A	C	8C				
C1059	A	6H	C2110	A	C	8F	C3705	A	C	8C	IC1008	A	C	8I	R1004	A	C	7H	R1538	A	C	4I	R2023	B	C	5E	R3048	A	C	4B	R3706	B	C	8D				
C1060	B	6H	C2111	A	C	5G	C3706	A	C	8C	IC1009	B	C	8D	R1005	A	C	7H	R1539	A	C	4I	R2027	B	C	5E	R3054	B	C	4B	R3707	B	C	8D				
C1061	A	7F	C2112	A	C	5G	C3707	A	C	8C	IC1010	B	C	7D	R1006	A	C	7H	R1540	A	C	5H	R2031	B	C	4E	R3056	B	C	4B	R3708	B	C	8D				
C1062	A	8F	C2113	B	C	5F	C3708	B	C	8C	IC1011	A	C	7D	R1006	A	C	7H	R1540	A	C	5I	R2032	B	C	4E	R3057	A	C	4B	R3709	B	C	8D				
C1063	A	8E	C2114	B	C	5G	C3709	A	C	8C	IC1501	B	C	4I	R1009	A	C	7H	R1547	A	C	4I	R2033	A	C	4G	R3058	A	C	4B	R3710	B	C	8D				
C1064	B	8E	C2115	B	C	5G	C3710	A	C	8D	IC1502	A	C	3I	R1010	A	C	7H	R1552	A	C	4J	R2034	B	C	4G	R3059	A	C	4B	R3711	B	C	9C				
C1067	B	8E	C2116	B	C	6E	C3711	A	C	8D	IC1601	A	C	5H	R1011	A	C	7H	R1553	A	C	4J	R2035	A	C	4G	R3060	A	C	4B	R3712	B	C	9D				
C1068	B	8E	C2117	B	C	6E	C3712	A	C	7D	IC2001	A	C	4F	R1012	A	C	7H	R1558	A	C	3J	R2036	B	C	4G	R3061	B	C	4B	R3713	B	C	9D				
C1069	A	7E	C2118	B	C	6E	C3713	B	C	7D	IC2002	B	C	5F	R1014	A	C	7H	R1560	A	C	4J	R2037	B	C	5G	R3062	A	C	4A	R3714	B	C	9D				
C1070	A	8E	C2119	B	C	5F	C3714	A	C	8D	IC2003	B	C	8E	R1015	A	C	7H	R1562	A	C	3J	R2038	A	C	4G	R3063	A	C	4B	R3715	B	C	8D				
C1071	A	6J	C3001	B	C	5B	C3715	B	C	8D	IC2004	A	C	5G	R1015	A	C	7H	R1563	A	C	3J	R2039	A	C	4G	R3064	A	C	4B	R3716	B	C	8D				
C1072	A	6J	C3002	B	C	5B	C3716	B	C	8D	IC2006	B	C	6E	R1018	A	C	7H	R1563	A	C	3J	R2040	A	C	5G	R3065	A	C	4A	R3717	B	C	8C				
C1073	A	6J	C3003	A	C	4B	C3717	A	C	8D	IC2007	B	C	5G	R1019	A	C	8H	R1564	A	C	3J	R2041	B	C	4E	R3069	B	C	5B	R3718	B	C	8C				
C1074	A	6J	C3004	A	C	5B	C3718	A	C	8D	IC3001	B	C	4B	R1020	A	C	8H	R1566	A	C	4I	R2042	B	C	4E	R3070	A	C	4B	R3719	B	C					

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION
R4041	B C 4C	TL1041	B C 8H	TL1506	B C 3G	TL1599	B C 5I	TL1692	B C 2H	TL4045	A C 4D		
R4042	B C 4C	TL1042	B C 8I	TL1507	B C 3G	TL1600	B C 6I	TL1693	B C 3H	TL4046	A C 5D		
R4043	B C 4C	TL1043	B C 8I	TL1508	B C 3G	TL1601	B C 5J	TL1694	B C 3H	TL4047	A C 5D		
R4044	B C 5C	TL1044	B C 8I	TL1509	B C 3G	TL1602	B C 5J	TL1695	B C 2H	TL4048	A C 4D		
R4045	B C 5C	TL1045	B C 8I	TL1510	B C 3G	TL1603	B C 6J	TL1696	B C 3H	X1001	A C 8H		
R4046	B C 5C	TL1046	B C 8I	TL1511	B C 3G	TL1604	B C 5J	TL1697	B C 3H	X1002	A C 7I		
RA1001	A C 8I	TL1047	B C 8I	TL1512	B C 3G	TL1605	B C 5J	TL1698	B C 2H	X2001	A C 6F		
RA1002	A C 7I	TL1048	B C 8I	TL1513	B C 3G	TL1606	B C 5J	TL1699	B C 3H	X2003	A C 4E		
RA1003	A C 7I	TL1049	B C 8I	TL1514	B C 3G	TL1607	B C 5J	TL1700	B C 3H	X3101	A C 3B		
RA1004	A C 7I	TL1050	B C 8I	TL1515	B C 3G	TL1608	B C 5J	TL1701	B C 2H				
RA1005	A C 9I	TL1051	B C 8I	TL1516	B C 3G	TL1609	B C 5J	TL1702	B C 3H				
RA1006	A C 9I	TL1052	B C 8I	TL1517	B C 3G	TL1610	B C 5J	TL1703	B C 3H				
RA1501	A C 4H	TL1053	B C 8I	TL1518	B C 3G	TL1611	B C 5J	TL1704	B C 2H				
RA1502	A C 4H	TL1054	B C 8I	TL1519	B C 4G	TL1612	B C 5J	TL1705	B C 3H				
RA1503	A C 4H	TL1055	B C 8I	TL1520	B C 4G	TL1613	B C 5J	TL1706	B C 3H				
RA1504	A C 4H	TL1056	B C 8I	TL1521	B C 4G	TL1614	B C 5J	TL1707	B C 2H				
RA1505	A C 5J	TL1057	B C 8I	TL1522	B C 4G	TL1615	B C 5J	TL1708	B C 3H				
RA1506	A C 5I	TL1058	B C 8I	TL1523	B C 4G	TL1616	B C 5J	TL1801	A C 3B				
RA1507	B C 6I	TL1059	B C 8I	TL1524	B C 4G	TL1617	B C 5J	TL2002	A C 5F				
RA1508	B C 6I	TL1060	B C 8I	TL1525	B C 4G	TL1618	B C 5J	TL2007	A C 5F				
RA1509	A C 5I	TL1061	B C 8I	TL1526	B C 4G	TL1619	B C 5J	TL2008	A C 5F				
RA1510	A C 4I	TL1062	B C 8I	TL1527	B C 4G	TL1620	B C 5J	TL2009	A C 5F				
RA4001	A C 4B	TL1063	B C 8I	TL1528	B C 4G	TL1621	B C 5J	TL2012	A C 4E				
RA4002	A C 4C	TL1064	B C 8I	TL1529	B C 4G	TL1622	B C 5J	TL2013	A C 5E				
RA4003	B C 4B	TL1065	B C 8J	TL1530	B C 4G	TL1623	B C 4J	TL2014	A C 5E				
RA4004	B C 4C	TL1066	B C 8J	TL1531	B C 4G	TL1624	B C 4J	TL2015	A C 5E				
RA4006	A C 3C	TL1067	B C 8J	TL1532	B C 4G	TL1625	B C 4J	TL2016	A C 5E				
RA4007	A C 3C	TL1068	B C 8J	TL1533	B C 4G	TL1626	B C 4J	TL2017	A C 5E				
RA4008	B C 3C	TL1069	B C 8J	TL1534	B C 4G	TL1627	B C 4J	TL2018	A C 3F				
TEST POINT													
TP1001	A C 9I	TL1071	B C 8J	TL1535	B C 4G	TL1628	B C 4J	TL2021	A C 3F				
TP1002	A C 9I	TL1072	B C 8J	TL1536	B C 4G	TL1629	B C 4J	TL2022	A C 3E				
TP1501	A C 2I	TL1073	B C 8J	TL1537	B C 4G	TL1630	B C 4J	TL2023	A C 3E				
TP1503	A C 3I	TL1074	B C 8J	TL1538	B C 4G	TL1631	B C 4J	TL2024	A C 3E				
TP1504	A C 3I	TL1075	B C 8J	TL1539	B C 4G	TL1632	B C 4J	TL2025	A C 3E				
TP1505	A C 3I	TL1076	B C 8J	TL1540	B C 5G	TL1633	B C 4J	TL2026	A C 3E				
TP1507	A C 2J	TL1077	B C 7J	TL1541	B C 5G	TL1634	B C 4J	TL2027	A C 3E				
TP1508	A C 3J	TL1078	B C 7J	TL1542	B C 5G	TL1635	B C 4J	TL2028	A C 3E				
TP1509	A C 3J	TL1079	B C 7J	TL1543	B C 5G	TL1636	B C 4J	TL2029	A C 3E				
TP1510	A C 2J	TL1080	B C 7J	TL1544	B C 5G	TL1637	B C 4J	TL2041	A C 5F				
		TL1081	B C 7J	TL1545	B C 5G	TL1638	B C 4J	TL2042	A C 5F				
		TL1082	B C 7J	TL1546	B C 5G	TL1639	B C 4J	TL2043	A C 3F				
		TL1083	B C 7J	TL1547	B C 5G	TL1640	B C 4J	TL2044	A C 3F				
K1001	A C 7H	TL1084	B C 7J	TL1548	B C 5G	TL1641	B C 4J	TL2045	A C 3F				
K1011	A C 8G	TL1085	B C 7J	TL1549	B C 5G	TL1642	B C 4J	TL2046	A C 3E				
K1012	B C 7E	TL1086	B C 7J	TL1550	B C 5G	TL1643	B C 4J	TL2047	A C 3E				
K2001	B C 5G	TL1087	B C 7J	TL1551	B C 5G	TL1644	B C 3J	TL2048	A C 3E				
K2002	A C 6E	TL1088	B C 7J	TL1552	B C 5G	TL1645	B C 3J	TL2049	A C 3F				
K3101	B C 3B	TL1089	B C 7J	TL1553	B C 5G	TL1646	B C 3J	TL2050	A C 3F				
LC1002	A C 8G	TL1090	B C 7J	TL1554	B C 5G	TL1647	B C 3J	TL2051	A C 3F				
LC1003	A C 8F	TL1091	B C 7J	TL1555	B C 6G	TL1648	B C 3J	TL2052	A C 3E				
LC1005	A C 8E	TL1092	B C 7J	TL1556	B C 5H	TL1649	B C 3J	TL2053	A C 3F				
LC3101	A C 3B	TL1093	B C 7J	TL1557	B C 5H	TL1650	B C 3J	TL2054	A C 3F				
TH2001	A C 5F	TL1094	B C 7J	TL1558	B C 6H	TL1651	B C 3J	TL2055	A C 3F				
TL1001	B C 7H	TL1095	B C 7J	TL1559	B C 5H	TL1652	B C 3J	TL2056	A C 3F				
TL1002	B C 7H	TL1096	B C 7J	TL1560	B C 5H	TL1653	B C 3J	TL2057	A C 3F				
TL1003	B C 7H	TL1097	B C 6I	TL1561	B C 6H	TL1654	B C 3J	TL2058	A C 3F				
TL1004	B C 7H	TL1098	B C 6I	TL1562	B C 5H	TL1655	B C 3J	TL2059	A C 3F				
TL1005	B C 7H	TL1099	B C 6I	TL1563	B C 5H	TL1656	B C 3J	TL2060	A C 3E				
TL1006	B C 7H	TL1100	B C 6I	TL1564	B C 6H	TL1657	B C 3J	TL2061	A C 3F				
TL1007	B C 7H	TL1101	B C 6I	TL1565	B C 5H	TL1658	B C 3J	TL2062	A C 3E				
TL1008	B C 7H	TL1102	B C 6I	TL1566	B C 5H	TL1659	B C 2J	TL2063	A C 3F				
TL1009	B C 7H	TL1103	B C 6I	TL1567	B C 6H	TL1660	B C 3J	TL2064	A C 3F				
TL1010	B C 7H	TL1104	B C 6I	TL1568	B C 5H	TL1661	B C 3J	TL2065	A C 3F				
TL1011	B C 7H	TL1105	B C 6I	TL1569	B C 5H	TL1662	B C 2J	TL2066	A C 3F				
TL1012	B C 7H	TL1106	B C 6I	TL1570	B C 6H	TL1663	B C 3J	TL2067	A C 3F				
TL1013	B C 7H	TL1107	B C 6I	TL1571	B C 5H	TL1664	B C 3J	TL2068	A C 3F				
TL1014	B C 7H	TL1108	B C 6I	TL1572	B C 5H	TL1665	B C 2J	TL2069	A C 3F				
TL1015	B C 7H	TL1109	B C 6I	TL1573	B C 6H	TL1666	B C 3I	TL2070	A C 3F				
TL1016	B C 7H	TL1110	B C 6I	TL1574	B C 5H	TL1667	B C 3I	TL2071	A C 5E				
TL1017	B C 7H	TL1111	B C 6I	TL1575	B C 5H	TL1668	B C 2I	TL2072	A C 5F				
TL1018	B C 7H	TL1112	B C 6I	TL1576	B C 6H	TL1669	B C 3I	TL2073	A C 5F				
TL1019	B C 7H	TL1113	B C 6I	TL1577	B C 5I	TL1670	B C 3I	TL2074	A C 5F				
TL1020	B C 7H	TL1114	B C 6I	TL1578	B C 5I	TL1671	B C 2I	TL2075	A C 5G				
TL1021	B C 7H	TL1115	B C 6I	TL1579	B C 6I	TL1672	B C 3I	TL2076	A C 5G				
TL1022	B C 8H	TL1116	B C 6I	TL1580	B C 5I	TL1673	B C 3I	TL2077	A C 5G				
TL1023	B C 8H	TL1117	B C 6I	TL1581	B C 5I	TL1674	B C 2I	TL2078	A C 5G				
TL1024	B C 8H	TL1118	B C 6I	TL1582	B C 6I	TL1675	B C 3I	TL3501	B C 7B				
TL1025	B C 8H	TL1119	B C 6I	TL1583	B C 5I	TL1676	B C 3I	TL3502	A C 8B				
TL1026	B C 8H	TL1120	B C 6I	TL1584	B C 5I	TL1677	B C 2I	TL4021	A C 3D				
TL1027	B C 8H	TL1121	B C 6I	TL1585	B C 6I	TL1678	B C 3I	TL4022	A C 3D				
TL1028	B C 8H	TL1122	B C 6H	TL1586	B C 5I	TL1679	B C 3I	TL4023	A C 4D				
TL1029	B C 8H	TL1123	B C 6H	TL1587	B C 5I	TL1680	B C 2I	TL4024	A C 4D				
TL1030	B C 8H	TL1124	B C 6H	TL1588	B C 6I	TL1681	B C 3I	TL4025	A C 4D				
TL1031	B C 8H	TL1125	B C 6H	TL1589	B C 5I	TL1682	B C 3I	TL4031	A C 5C				
TL1032	B C 8H	TL1126	B C 6H	TL1590	B C 5I	TL1683	B C 2I	TL4032	A C 5C				
TL1033	B C 8H	TL1127	B C 6H	TL1591	B C 6I	TL1684	B C 3I	TL4033	A C 5C				
TL1034	B C 8H	TL1128	B C 6H	TL1592	B C 5I	TL1685	B C 3I	TL4034	A C 5D				
TL1035	B C 8H	TL1129	B C 6H	TL1593	B C 5I	TL1686	B C 2I	TL4035	A C 5D				
TL1036	B C 8H	TL1501	B C 3G	TL1594	B C 6I	TL1687	B C 3I	TL4036	A C 4D				
TL1037	B C 8H	TL1502	B C 3G	TL1595	B C 5I	TL1688	B C 3I	TL4041	A C 3C				
TL1038	B C 8H	TL1503	B C 3G	TL1596	B C 5I	TL1689	B C 2I	TL4042	A C 5D				
TL1039	B C 8H	TL1504	B C 3G	TL1597	B C 6I	TL1690	B C 3H	TL4043	A C 5D				
TL1040	B C 8H	TL1505	B C 3G	TL1598	B C 5I	TL1691	B C 3H	TL4044	A C 4D				

— COMPONENT SIDE(A) —

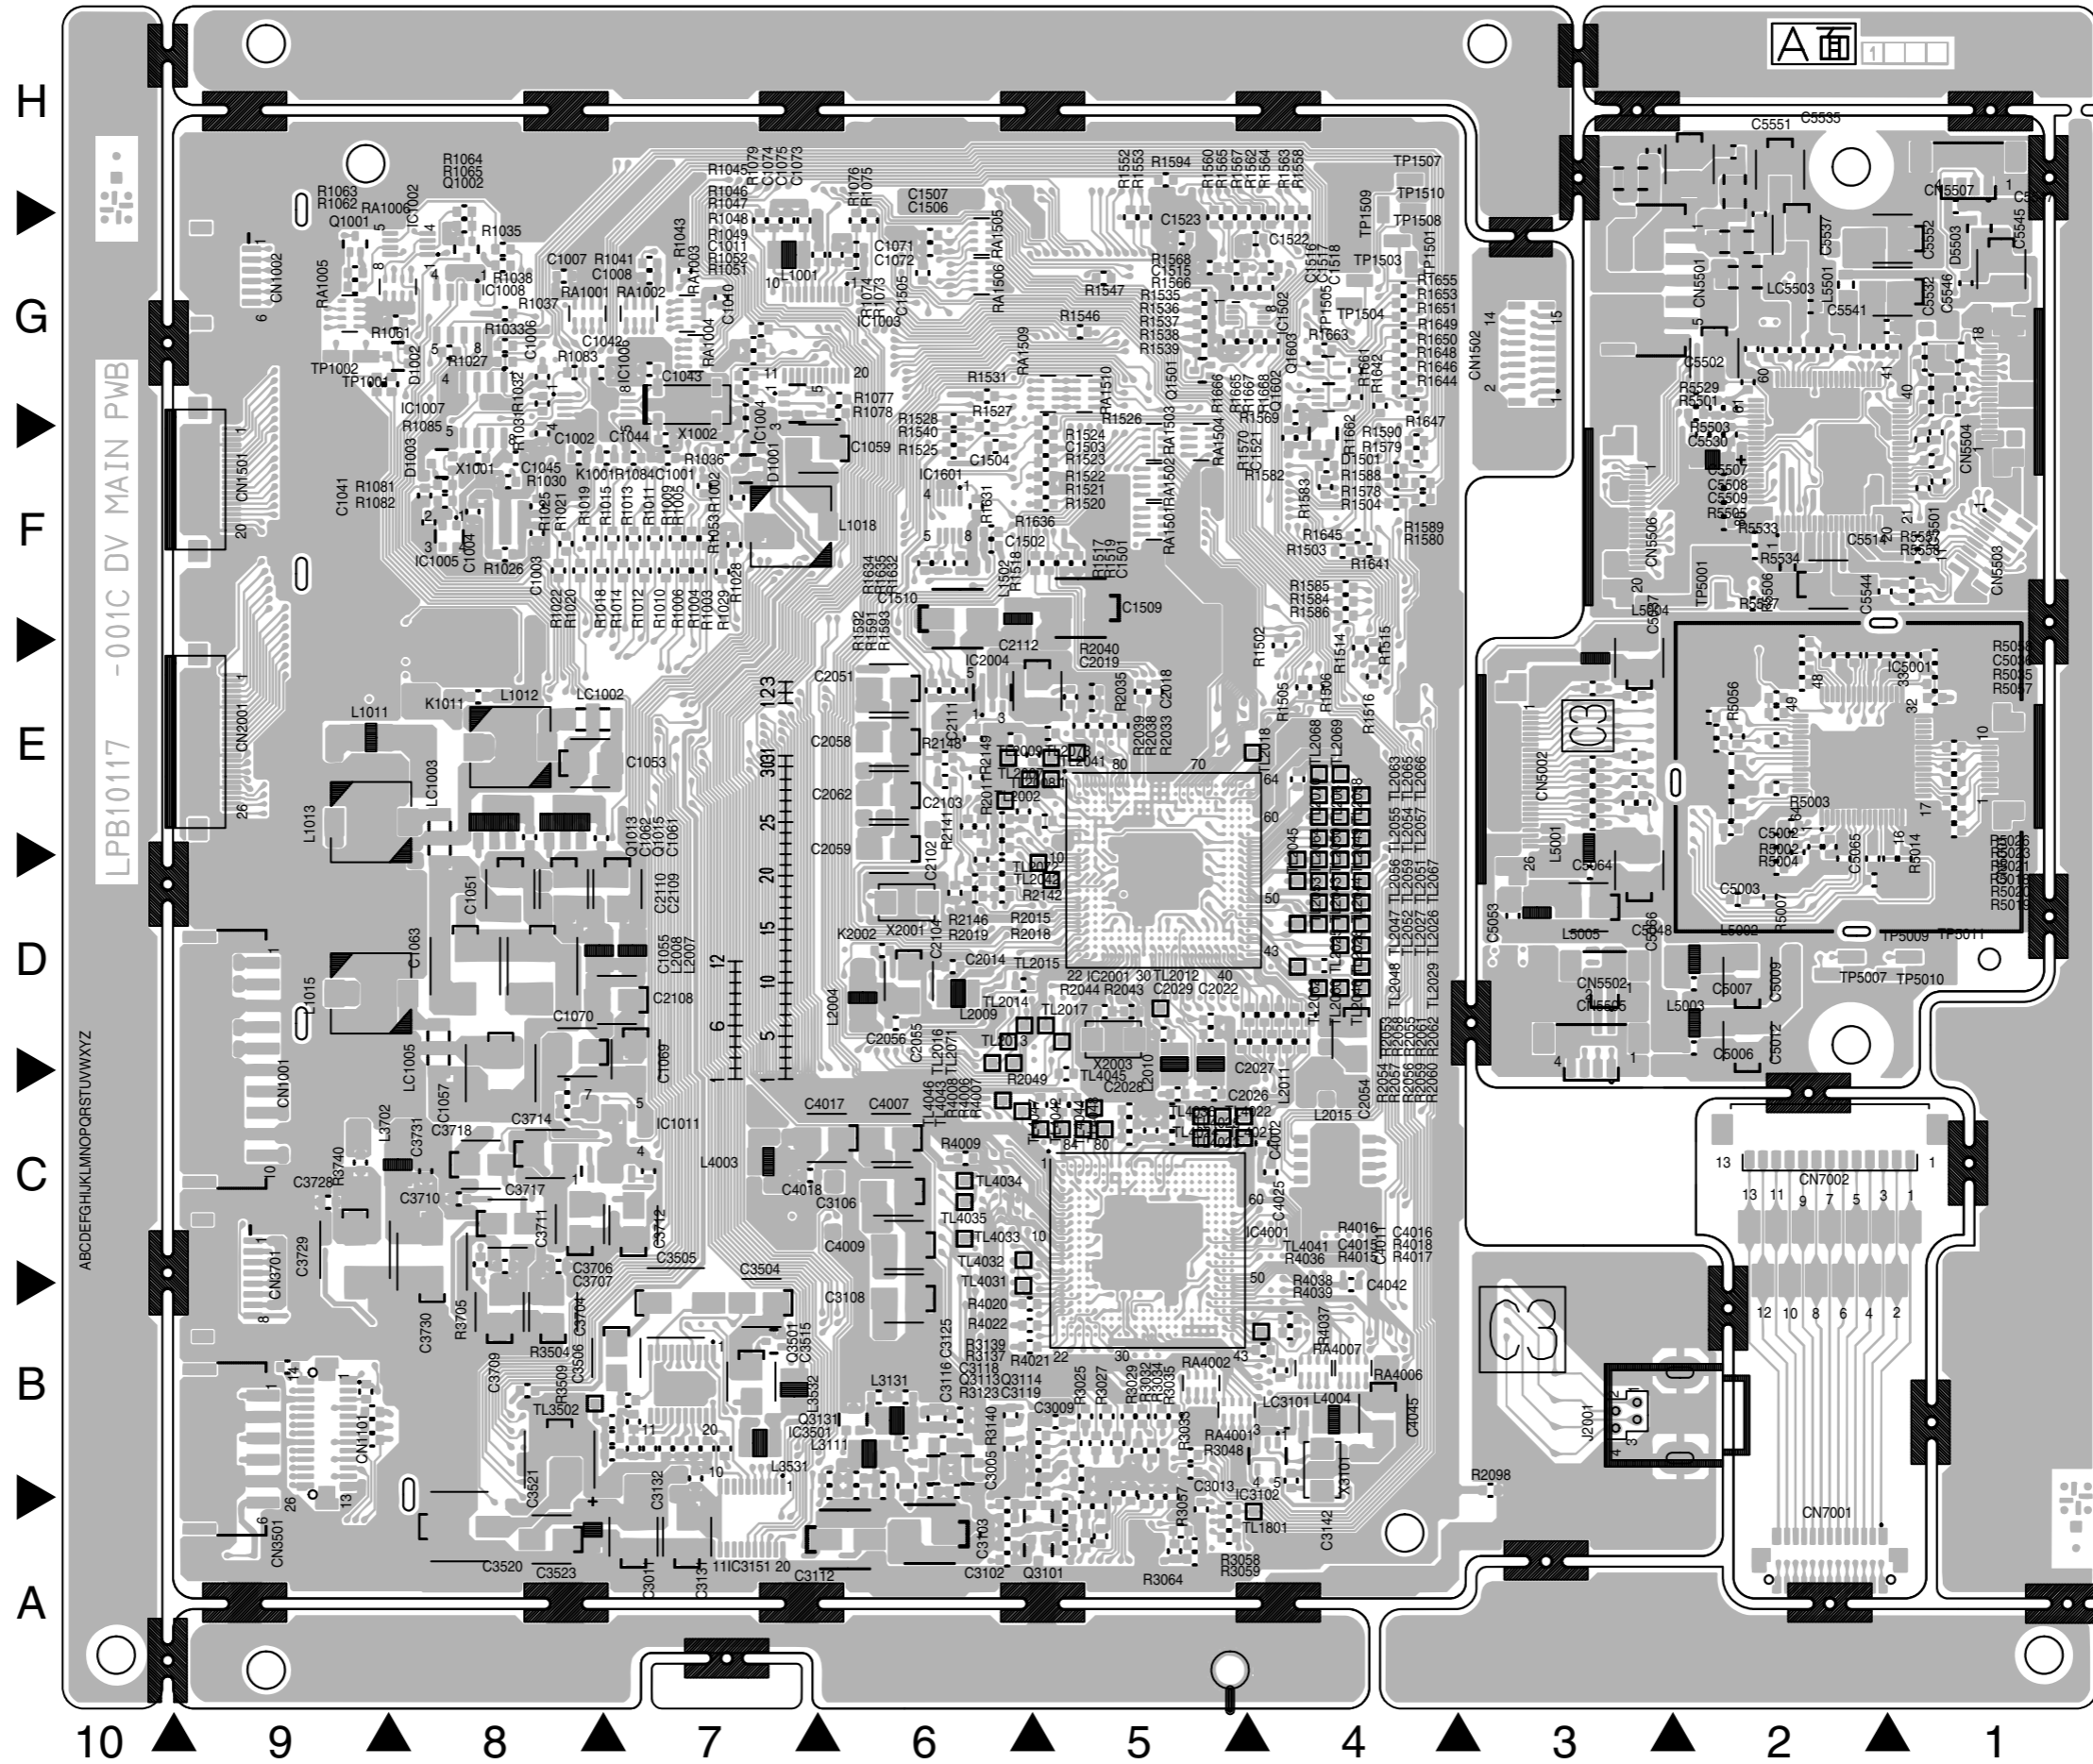

ABCDEFHJKLMNQRSTUWXYZ

LPB10117 -001C DV MAIN PWB


A面

C3


10 9 8 7 6 5 4 3 2 1

4.32 FDP GRID ASSIGNMENT AND ANODE CONNECTION

[A] (FDP with audio level indicator)

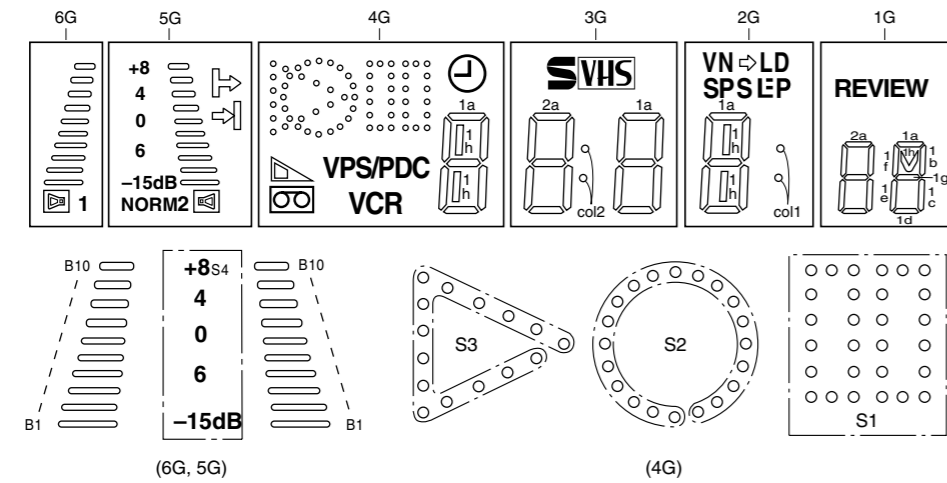

[B] (FDP without audio level indicator)

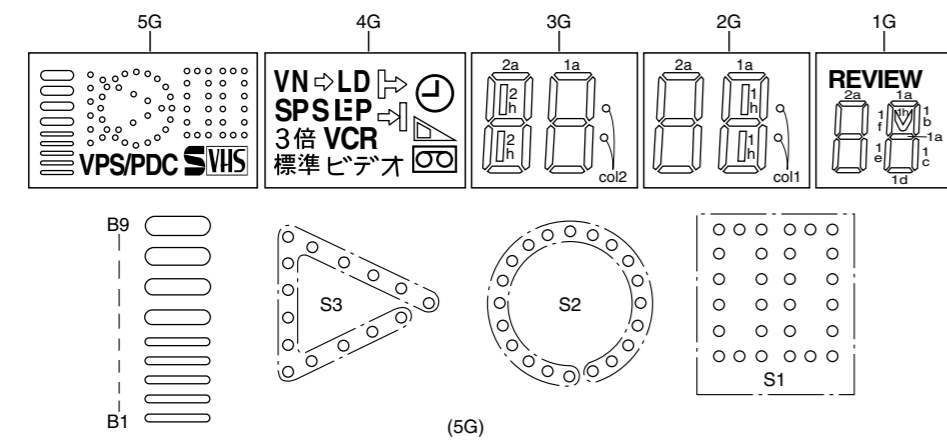


ANODE CONNECTION

	6G	5G	4G	3G	2G	1G
P 1	—	→	S2	1a	1a	1a
P 2	—	→	S1	1b	1b	1b
P 3	—	S4	S3	1f	1f	1f
P 4	—	NORM	VPS/PDC	1g	1g	1g
P 5	1	2	Ⓜ	1c	1c	1c
P 6	→	→	→	1e	1e	1e
P 7	B10	B10	Ⓜ	1d	1d	1d
P 8	B9	B9	VCR	col2	1h	1h
P 9	B8	B8	1a	2a	col1	2a
P10	B7	B7	1b	2b	↔	2b
P11	B6	B6	1f	2f	VN	2f
P12	B5	B5	1g	2g	LD	2g
P13	B4	B4	1c	2c	SP	2c
P14	B3	B3	1e	2e	S _(SEP)	2e
P15	B2	B2	1d	2d	⋮ _(SEP)	2d
P16	B1	B1	1h	SVHS	LP _(SEP)	REVIEW



ANODE CONNECTION

	5G	4G	3G	2G	1G
P 1	S2	→	1a	1a	1a
P 2	S1	→	1b	1b	1b
P 3	S3	3倍	1f	1f	1f
P 4	VPS/PDC	標準	1g	1g	1g
P 5	SVHS	Ⓜ	1c	1c	1c
P 6	—	→	1e	1e	1e
P 7	—	Ⓜ	1d	1d	1d
P 8	B9	VCR	col2	1h	1h
P 9	B8	ビデオ	2a	2a	2a
P10	B7	↔	2b	2b	2b
P11	B6	VN	2f	2f	2f
P12	B5	LD	2g	2g	2g
P13	B4	SP	2c	2c	2c
P14	B3	S _(SEP)	2e	2e	2e
P15	B2	⋮ _(SEP)	2d	2d	2d
P16	B1	LP _(SEP)	2h	col1	REVIEW


4.33 REMOTE CONTROL SCHEMATIC DIAGRAM

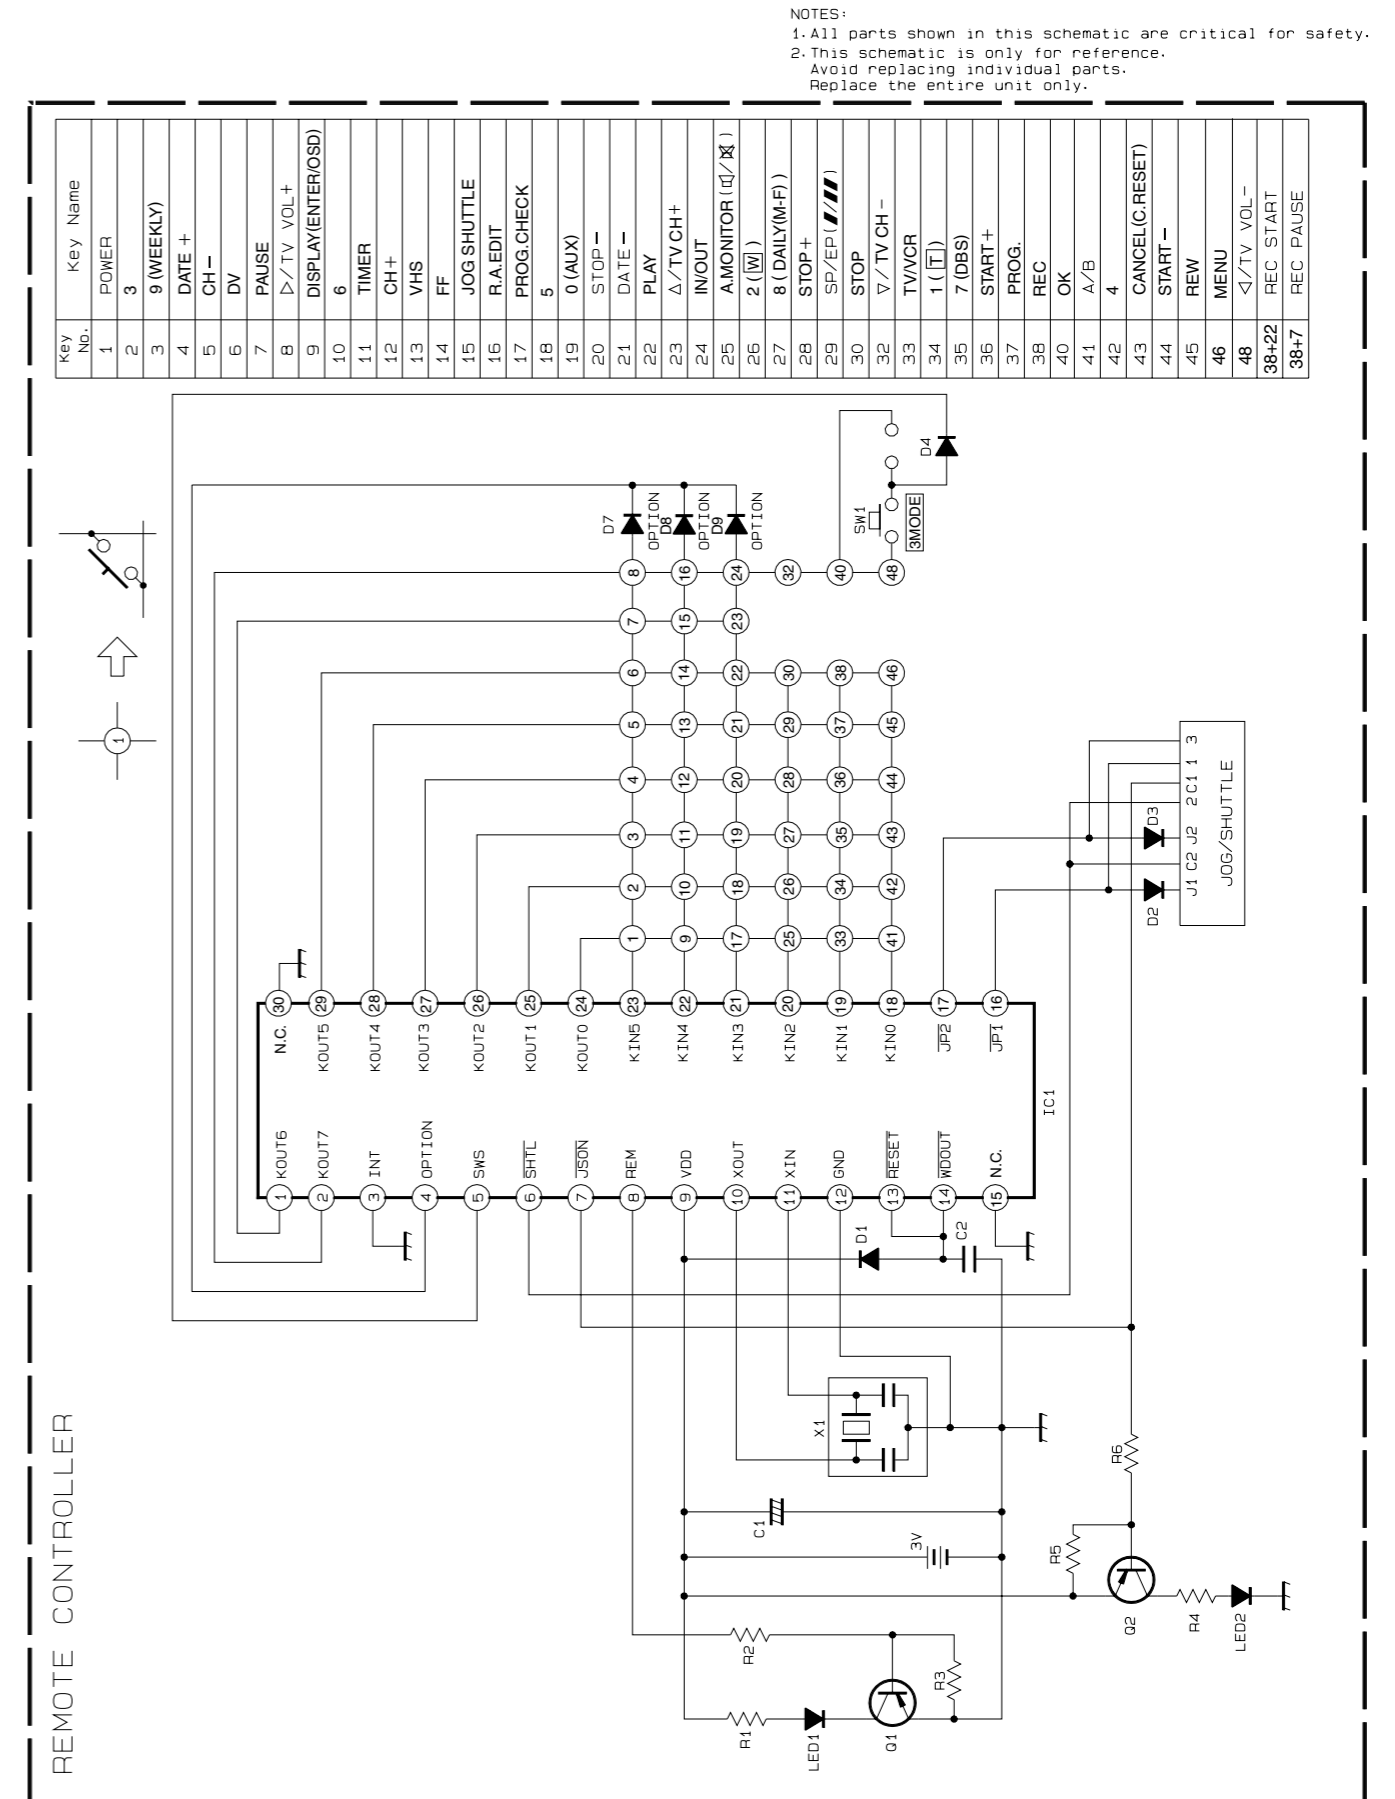


4.34 WAVEFORMS
< VIDEO >

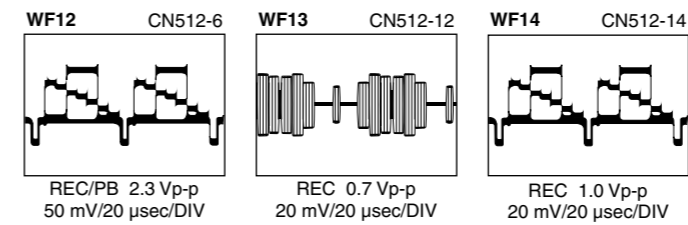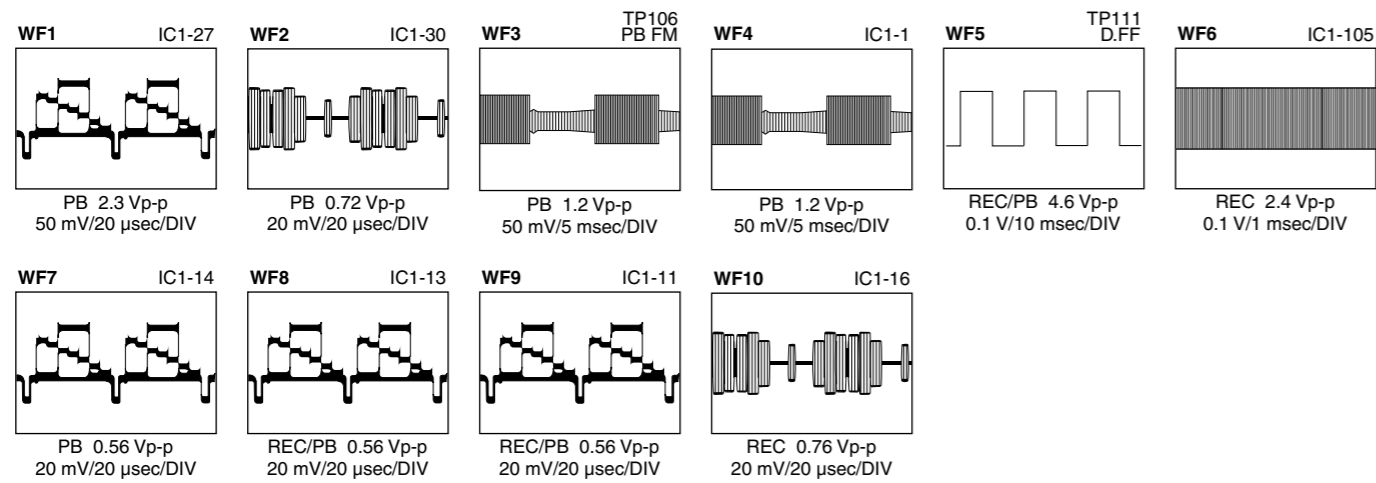


< ON SCREEN >

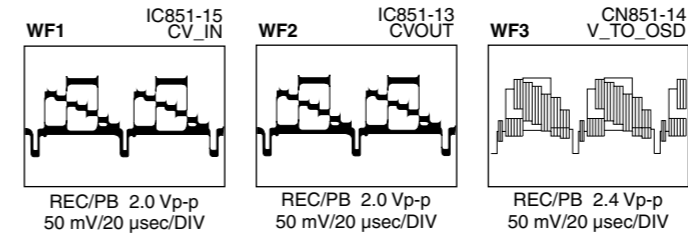


< AUDIO >

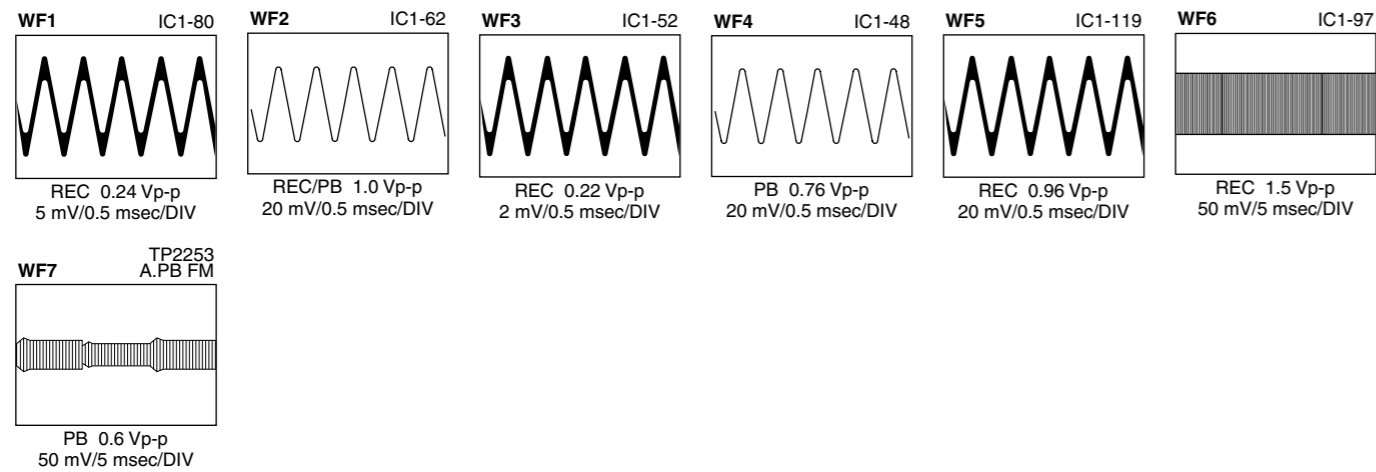

< SYSCON >

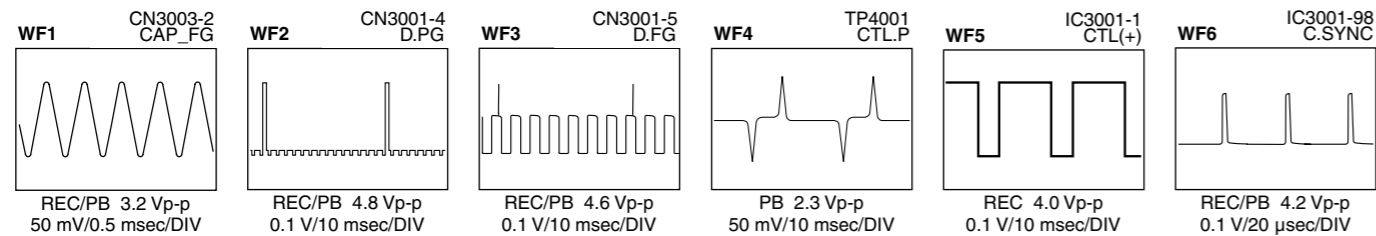

< S-SUB >

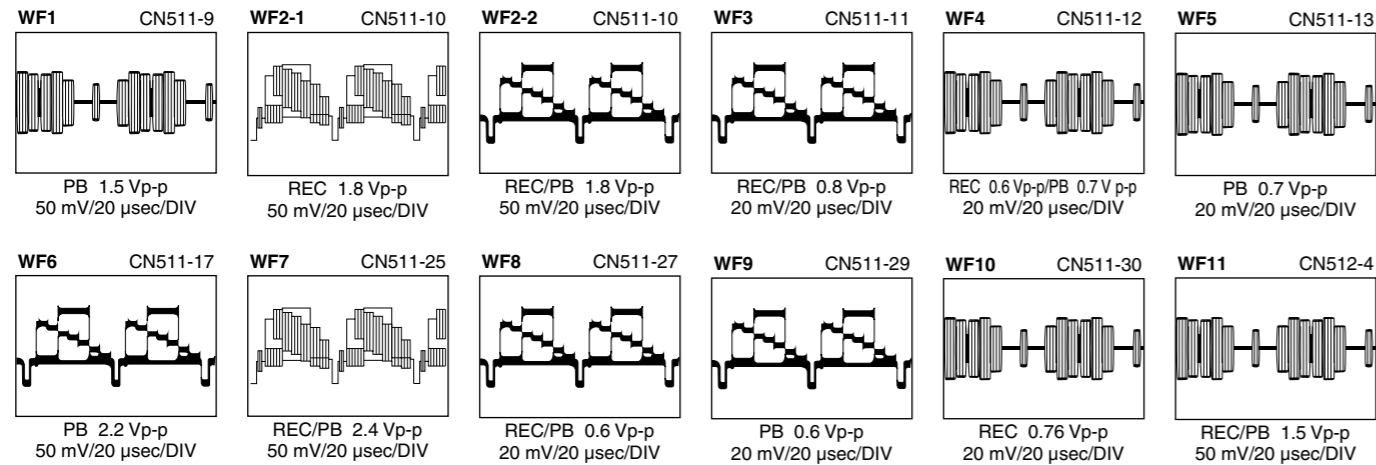

4.35 VOLTAGE CHARTS

<SW REGULATOR>

MODE PIN NO.	REC	PLAY
IC5101	7.9	7.9
1	7.9	7.9
2	87.4	87.4
3	16.1	16.1
4	7.8	0
5	2.4	2.4
6	10.6	10.6
7	0	0
8	0	0
9	12.3	12.3
10	4.3	4.3
11	4.3	4.3
12	31.7	31.7
13	4.3	4.3
14	-28.3	-28.3
15	7.2	7.2
16	-7.2	-7.2
17	6.4	6.4
18	6.4	6.4
19	19.1	19.1

MODE PIN NO.	REC	PLAY
CN5324	6.7	6.7
1	0	0
2	7.1	7.1
3	5.1	5.1
4	0	0
5	11.2	11.2
6	0	0
7	2.4	2.4
8	2.3	2.3
9	4.9	4.9
10	2.4	2.4
11	0	0
12	0	0
13	2.2	2.2
14	19.3	19.3
15	0	0
16	-15.6	-15.6
17	0	0
18	43.3	43.3
19	12.3	12.3
20	4.3	4.3
21	4.3	4.3
22	31.7	31.7
23	4.3	4.3
24	-28.3	-28.3
25	7.2	7.2
26	-7.2	-7.2
27	6.4	6.4
28	6.4	6.4
29	19.1	19.1

<VIDEO/AUDIO>

MODE PIN NO.	REC	PLAY
IC1	4.2	2.1
2	2.8	2.8
3	2.6	2.6
4	1.9	1.4
5	1.9	1.4
6	2.4	2.4
7	2.1	0.7
8	0	0
9	2.7	2.7
10	2.2	2.2
11	3.1	3.1
12	2.8	2.8
13	3.1	3.1
14	3.5	2.4
15	0	0
16	2.8	2.8
17	1.5	1.5
18	2.8	2.8
19	1.9	1.9
20	0	2.8
21	0	1.9
22	2.8	2.8
23	3.1	2.9
24	4.8	4.8
25	0.3	0.3
26	0	0
27	1.3	2.3
28	2.3	2.3
29	1.9	1.9
30	2.1	2.1
31	0	0
32	2.6	2.6
33	4.9	4.9
34	2.7	2.2
35	4.8	4.8
36	2.6	2.6
37	2.3	2.3
38	-	-
39	1.2	1.2
40	-	-
41	2.5	2.5
42	-	-
43	0	0
44	2.1	2.1
45	4.6	4.6
46	4.2	4.2
47	2.9	2.9
48	2.6	2.6
49	4.9	4.9
50	2.5	2.5
51	2.8	2.8
52	2.3	2.3
53	2.3	2.3
54	2.5	2.5
55	2.1	2.1
56	1.4	1.4
57	2.3	2.3
58	8.4	8.4
59	4.6	4.6
60	4.2	4.2
61	4.2	4.2
62	4.2	4.2
63	2.3	2.3
64	2.3	2.3
65	1.4	1.4
66	2.8	3.2
67	4.2	4.2
68	4.2	4.2
69	4.2	4.2
70	4.2	4.2
71	0.3	0.3
72	1.2	1.2
73	0.2	0.2
74	2.2	2.2
75	2.4	2.4
76	0	0
77	0.4	0.4
78	0.4	0.4
79	0.3	0.3
80	0.2	0.2
81	2.2	2.2
82	0.7	0.7
83	0	0
84	0	0
85	2.3	2.3
86	2.3	2.3
87	2.2	2.2
88	2.3	2.3
89	2.2	2.2
90	2.3	2.3
91	0.1	0.1
92	0	0
93	0	0
94	0	0
95	0	0
96	2.4	2.4
97	2.7	2.3
98	2.4	2.4
99	4.9	4.9
100	4.9	4.9
101	0	0
102	0	0
103	0	0
104	2.4	2.4
105	2.3	2.3
106	2.3	2.3
107	4.9	4.9
108	0	0
109	0	0
110	0	0
111	0	2.5
112	2.6	2.6
113	1.7	0.9
114	0	0
115	2.5	2.5
116	2.5	2.5
117	2.5	2.5
118	0	0
119	2.4	2.4
120	4.6	4.6

<REGULATOR>

MODE PIN NO.	REC	PLAY
IC5321	4.3	4.3
1	3.2	3.2
2	0	0
3	0	0
4	2.6	2.6
5	21.4	21.4
6	6.4	6.4
7	6.4	6.4
8	-7.2	-7.2
9	7.2	7.2
10	-28.3	-28.3
11	4.3	4.3
12	31.7	31.7
13	0	0
14	12.3	12.3
15	4.3	4.3
16	0	0
17	0	0
18	-15.6	-15.6
19	0	0
20	-19.3	-19.3
21	12.2	12.2
22	11.6	11.6
23	11.5	11.5
24	0	0
25	0	0
26	-19.3	-19.3
27	-28.4	-28.4
28	-15.8	-15.8
29	0	0
30	4.8	4.8
31	0	0
32	4.8	4.8
33	0	0
34	19.0	19.0
35	5.0	5.0
36	5.0	5.0
37	4.9	4.9
38	-7.3	-7.3
39	12.2	12.2
40	11.4	11.4
41	0	0
42	0	0
43	0	0
44	0	0
45	0	0
46	31.9	31.9
47	-7.2	-7.2
48	5.1	5.1
49	0	0
50	3.2	3.2
51	3.2	3.2
52	0	0
53	3.2	3.2
54	0	0
55	0	0
56	0	0
57	3.2	3.2
58	0	0
59	0	0
60	0	0

<REGULATOR>

MODE PIN NO.	REC	PLAY
IC5321	4.3	4.3
1	3.2	3.2
2	0	0
3	0	0
4	2.6	2.6
5	21.4	21.4
6	6.4	6.4
7	6.4	6.4
8	-7.2	-7.2
9	7.2	7.2
10	-28.3	-28.3
11	4.3	4.3
12	31.7	31.7
13	0	0
14	12.3	12.3
15	4.3	4.3
16	0	0
17	0	0
18	-15.6	-15.6
19	0	0
20	-19.3	-19.3
21	12.2	12.2
22	11.6	11.6
23	11.5	11.5
24	0	0
25	0	0
26	-19.3	-19.3
27	-28.4	-28.4
28	-15.8	-15.8
29	0	0
30	4.8	4.8
31	0	0
32	4.8	4.8
33	0	0
34	19.0	19.0
35	5.0	5.0
36	5.0	5.0
37	4.9	4.9
38	-7.3	-7.3
39	12.2	12.2
40	11.4	11.4
41	0	0
42	0	0
43	0	0
44	0	0
45	0	0
46	31.9	31.9
47	-7.2	-7.2
48	5.1	5.1
49	0	0
50	3.2	3.2
51	3.2	3.2
52	0	0
53	3.2	3.2
54	0	0
55	0	0
56	0	0
57	3.2	3.2
58	0	0
59	0	0
60	0	0

<REGULATOR>

MODE PIN NO.	REC	PLAY
IC5321	4.3	4.3
1	3.2	3.2
2	0	0
3	0	0
4	2.6	2.6
5	21.4	21.4
6	6.4	6.4
7	6.4	6.4
8	-7.2	-7.2
9	7.2	7.2
10	-28.3	-28.3
11	4.3	4.3
12	31.7	31.7
13	0	0
14	12.3	12.3
15	4.3	4.3
16	0	0
17	0	0
18	-15.6	-15.6
19	0	0
20	-19.3	-19.3
21	12.2	12.2
22	11.6	11.6
23	11.5	11.5
24	0	0
25	0	0
26	-19.3	-19.3
27	-28.4	-28.4
28	-15.8	-15.8
29	0	0
30	4.8	4.8
31	0	0
32	4.8	4.8
33	0	0
34	19.0	19.0
35	5.0	5.0
36	5.0	5.0
37	4.9	4.9
38	-7.3	-7.3
39	12.2	12.2
40	11.4	11.4
41	0	0
42	0	0
43	0	0
44	0	0
45	0	0
46	31.9	31.9
47	-7.2	-7.2
48	5.1	5.1
49	0	0
50	3.2	3.2
51	3.2	3.2
52	0	0
53	3.2	3.2
54	0	0
55	0	0
56	0	0
57	3.2	3.2
58	0	0
59	0	0
60	0	0

<REGULATOR>

MODE PIN NO.	REC	PLAY
IC5321	4.3	4.3
1	3.2	3.2
2	0	0
3	0	0
4	2.6	2.6
5	21.4	21.4
6	6.4	6.4
7	6.4	6.4
8	-7.2	-7.2
9	7.2	7.2
10	-28.3	-28.3
11	4.3	4.3
12	31.7	31.7
13	0	0
14	12.3	12.3
15	4.3	4.3
16	0	0
17	0	0
18	-15.6	-15.6
19	0	0
20	-19.3	-19.3
21	12.2	12.2
22	11.6	11.6
23	11.5	11.5
24	0	0
25	0	0
26	-19.3	-19.3
27	-28.4	-28.4
28	-15.8	-15.8
29	0	0
30	4.8	4.8
31	0	0
32	4.8	4.8
33	0	0
34	19.0	19.0
35	5.0	5.0
36	5.0	5.0
37	4.9	4.9
38	-7.3	-7.3
39	12.2	12.2
40	11.4	11.4
41	0	0
42	0	0
43	0	0
44	0	0
45	0	0
46	31.9	31.9
47	-7.2	-7.2
48	5.1	5.1
49	0	0
50	3.2	3.2
51	3.2	3.2
52	0	0
53	3.2	3.2
54	0	0
55	0	0
56	0	0
57	3.2	3.2
58	0	0
59	0	0
60	0	0

<REGULATOR>

MODE PIN NO.	REC	PLAY
IC5321	4.3	4.3
1	3.2	3.2
2	0	0
3	0	0
4	2.6	2.6
5	21.4	

MODE PIN NO.	REC	PLAY
111	0	0
112	3.1	3.1
113	3.1	3.1
114	3.1	3.1
115	3.1	3.1
116	0	0
117	0	0
118	0	0
119	3.0	3.0
120	0.2	0.2
121	3.1	3.1
122	0	0
123	3.1	3.1
124	3.1	3.1
125	0.2	0.2
126	3.1	3.1
127	0	0
128	0.2	0.2
IC1002		
1	0	0
2	0.5	0.5
3	3.1	3.1
4	0	0
5	0	0
6	2.6	2.6
7	3.1	3.1
8	3.1	3.1
IC1005		
1	3.1	3.1
2	3.1	3.1
3	0	0
4	0	0
IC1006		
1	0	0
2	3.1	3.1
3	2.6	2.6
4	0	0
5	3.1	3.1
6	0.5	0.5
7	0.4	0.4
8	3.1	3.1
IC1007		
1	3.1	3.1
2	2.6	2.6
3	3.1	3.1
4	0	0
5	3.1	3.1
6	3.1	3.1
7	3.1	3.1
8	3.1	3.1
IC1008		
1	3.1	3.1
2	3.1	3.1
3	3.1	3.1
4	0	0
5	3.1	3.1
6	3.1	3.1
7	3.1	3.1
8	3.1	3.1
IC1009		
1	3.1	3.1
2	0	0
3	0	0
4	1.8	1.8
5	3.1	3.1
IC1010		
1	3.1	3.1
2	0	0
3	0	0
4	1.8	1.8
5	3.1	3.1
CN1001		
1	-7.2	-7.2
2	5.1	5.1
3	0	0
4	3.2	3.2
5	3.2	3.2
6	0	0
7	3.2	3.2
8	3.2	3.2
9	0	0
10	0	0
CN1002		
1	0	0
2	3.0	3.0
3	3.0	3.0
4	0	0
5	2.8	2.8
6	3.8	3.8
CN1101		
1	0	0
2	5.1	5.1
3	3.1	3.1
4	0	0
5	3.1	3.1
6	3.1	3.1
7	3.1	3.1
8	0	0
9	1.3	1.3
10	0	0
11	1.5	1.5

MODE PIN NO.	REC	PLAY
12	0	0
13	0	0
14	0	0
15	0	0
16	0	0
17	3.0	3.0
18	3.1	3.1
19	3.4	3.4
20	2.7	2.7
21	0	0
22	0	0
23	2.5	1.9
24	1.6	1.6
25	0	0
26	0	0

<DV MSD>

MODE PIN NO.	REC	PLAY
IC1501		
1	0	0
2	3.1	3.1
3	3.1	3.1
4	0	0
5	0	0
6	0.2	0.2
7	3.1	3.1
8	0	0
9	0.2	0.2
10	0	0
11	0	0
12	0	0
13	0	0
14	3.1	3.1
15	0	0
16	3.1	3.1
17	2.9	2.9
18	0	0
19	0	0
20	0	0
21	0	0
22	0	0
23	0	0
24	0	0
25	0	0
26	0	0
27	0	0
28	0	0
29	3.1	3.1
30	3.1	3.1
31	0.2	0.2
32	0.2	0.2
33	0.4	0.4
34	0.6	0.6
35	0.6	0.6
36	0.6	0.6
37	0.6	0.6
38	0.6	0.6
39	0	0
40	0.2	0.2
41	0.2	0.2
42	0.3	0.3
43	0.2	0.2
44	0.2	0.2
45	0.3	0.3
46	0.2	0.2
47	0.5	0.5
48	3.1	3.1
49	0.4	0.4
50	2.9	2.9
51	0	0
52	3.0	3.0
53	3.1	3.1
54	0	0
55	0	0
56	3.1	3.1
57	-	-
58	0	0
59	0	0
60	3.1	3.1
61	3.1	3.1
62	1.5	1.5
63	1.1	1.1
64	3.1	3.1
65	0	0
66	3.1	3.1
67	2.7	2.7
68	0	0
69	0	0
70	3.1	3.1
71	0	0
72	3.1	3.1
73	3.1	3.1
74	0	0
75	0	0
76	0	0
77	0	3.1
78	3.1	0
79	0	3.1
80	3.1	3.1
81	0	0

MODE PIN NO.	REC	PLAY
82	3.1	3.1
83	3.1	3.1
84	3.1	3.1
85	0	0
86	0	0
87	0	0
88	0	0
89	0	0
90	0	0
91	0	0
92	0	0
93	0	0
94	0	0
95	0	0
96	0	0
97	3.1	3.1
98	3.1	3.1
99	3.1	3.1
100	0	0
101	3.1	3.1
102	3.1	3.1
103	3.1	3.1
104	3.1	3.1
105	3.1	3.1
106	3.1	3.1
107	0	0
108	0	0
109	0	0
110	0	0
111	0	0
112	0	0
113	2.7	2.7
114	1.5	1.5
115	1.6	1.6
116	3.1	3.1
117	0	0
118	0	0
119	0	0
120	0.2	0.2
121	0.3	0.3
122	3.1	3.1
123	3.1	3.1
124	3.1	3.1
125	0	0
126	0	0
127	3.1	3.1
128	0	0
129	0	0
130	3.1	3.1
131	0	0
132	0	0
133	0	0
134	0	0
135	3.1	3.1
136	1.6	1.6
137	0	0
138	0	0
139	1.9	1.9
140	1.5	1.5
141	0	0
142	1.5	1.5
143	0	0
144	0	0
145	0	0
146	1.6	1.6
147	1.7	1.7
148	0.3	0.3
149	1.5	1.5
150	1.6	1.6
151	3.1	3.1
152	-	-
153	-	-
154	1.6	1.6
155	1.6	1.6
156	1.6	1.6
157	0	0
158	1.5	1.5
159	0.2	0.2
160	0	0
161	0.2	0.2
162	0	0
163	0	0
164	0	0
165	0	0
166	3.1	3.1
167	0	0
168	0	0
169	0.2	0.2
170	3.1	0
171	0	0
172	0	0
173	3.1	3.1
174	3.1	3.1
175	3.0	0.3
176	0.2	0.2
177	0	0
178	3.1	3.1
179	3.1	3.1
180	3.1	3.1
181	3.1	3.1
182	0	0

MODE PIN NO.	REC	PLAY
183	2.7	2.7
184	5.1	5.1
185	0	0
186	0	0
187	0.2	0.2
188	3.1	0
189	0.2	0.2
190	3.1	3.1
191	3.1	3.1
192	3.1	3.1
193	0	0
194	3.1	3.1
195	2.3	2.3
196	3.1	3.1
197	1.4	1.4
198	0	0
199	3.1	3.1
200	0	0
201	2.8	2.8
202	2.8	2.8
203	0	0
204	3.1	3.1
205	3.1	3.1
206	3.1	3.1
207	3.1	3.1
208	0	0.3
IC1502		
1	-	-
2	3.1	3.1
3	-	-
4	0	0
5	-	-
6	0.1	0.1
7	-	-
8	3.1	3.1
IC1601		
1	3.1	3.1
2	0	0
3	0	0
4	0	0
5	0	0
6	0	0
7	3.1	3.1
8	3.1	3.1
CN1501		
1	3.1	3.1
2	3.1	3.1
3	0	0
4	0	0
5	0	0
6	0	0
7	0	0
8	1.5	1.5
9	1.7	1.7
10	0	0
11	0	0
12	3.1	3.1
13	3.1	3.1
14	0	0
15	0	0
16	3.1	3.1
17	1.6	1.6
18	1.6	1.6
19	2.8	2.8
20	0	0
CN1502		
1	0	0
2	3.1	3.1
3	0	0
4	1.2	1.2
5	-	-
6	3.1	3.1
7	1.2	1.2
8	-	-
9	3.1	3.1
10	3.1	3.1
11	0	0
12	0	0
13	3.1	3.1
14	0	0
15	0	0

<DV MAIN>

MODE PIN NO.	REC	PLAY
IC2001		
-	-	-
IC2002		
1	0	0.4
2	0	0.4
3	0	0
4	1.4	1.4
5	0.1	0
6	3.1	0
7	0	0
8	2.9	2.9
IC2003		
1	3.1	3.1
2	0	0

MODE PIN NO.	REC	PLAY
3	1.2	1.2
4	2.5	2.5
5	3.1	3.1
IC2004		
1	5.1	5.1
2	0	0
3	1.2	1.2
4	2.9	2.9
5	5.1	5.1
IC2007		
1	3.1	3.1
2	0.9	0.9
3	0	0
4	0	0
5	0	0
6	1.4	1.4
7	2.4	2.4
8	3.1	3.1
CN2001		
1	0	0
2	3.1	0
3	3.1	0
4	0	3.1
5	1.5	1.5
6	0	3.1
7	0	0
8	0.7	0.7
9	1.5	1.5
10	1.1	1.1
11	2.5	1.9
12	2.5	1.3
13	1.2	1.2
14	2.5	1.3
15	2.5	1.9
16	0	0
17	0.4	0.4
18	0.5	0
19	1.4	0
20	1.2	1.2
21	0	0
22	0	0
23	3.1	3.1
24	5.1	5.1
25	3.1	3.1
26	2.5	2.5

<DV I/O>

MODE PIN NO.	REC	PLAY
IC3001		
1	0	0
2	3.0	3.0
3	1.1	1.1
4	0.5	0.5
5	0.8	0.8
6	1.6	1.6
7	0.5	0.5
8	1.0	1.0
9	0	0


4.36 CPU PIN FUNCTION

<SYSCON IC3001>

PIN NO.	LABEL	IN/OUT	FUNCTION
1	CTL(+)	IN/OUT	CTL(+) SIGNAL
2	SVSS	-	GND
3	CTL(-)	IN/OUT	CTL(-) SIGNAL
4	CTLBIAS	-	CTL BIAS VOLTAGE
5	CTLFB	IN	CTL PULSE FEEDBACK
6	CTLAMPOUT	OUT	CTL PULSE OUTPUT
7	CTLSMTIN	IN	CTL PULSE INPUT
8	CFG	IN	CAPSTAN FG PULSE INPUT
9	SVCC	-	SYSTEM POWER
10	AVCC	-	SYSTEM POWER FOR ANALOG CIRCUIT
11	NORM/MESEC/S	IN	SVHS MODE:H
12	SECAM_DET(H)/KILLER_DET(BIT_IN(H))	IN	NC/COLOR KILLER DETECT/NC
13	PAUSE	IN	PAUSE CONTROL
14	START_SENSOR	IN	START SENSOR
15	END_SENSOR	IN	END SENSOR
16	TU_SYNC	-	NC
17	SUB_BUSY/WIDE_DET2	IN	SERIAL TRANSMISSION SIGNAL FOR SUB CPU/NC
18	RF_AGC/LED	IN	CHANGES IN AT&S-IC OUTPUT AS CAUSED BY CHANGES IN RECEIVER SENSITIVITY WHEN THE SAME CHANNEL IS RECEIVED MORE THAN ONCE ARE INPUT:NC
19	SCR_ID(H)/WIDE_DET	IN	SCRAMBLECONTROL INPUT (SCRAMBLE:H)/NC
20	BS_ANT/AFC	IN	NC/TUNING CLOCK
21	VIDEO_ENV	IN	AUTO TRACKING DETECT/INPUT THE AVERAGE OF PLAYBACK VIDEO SIGNAL
22	A.ENV/ND(L)	IN	AUDIO PB FM ENV.INPUT/NON HIFI MODE:L
23	AVSS	-	GND FOR ANALOG CIRCUIT
24	CTL_GAIN	OUT	CONTROL AMP OUT FREQUENCY RESPONSE SWITCHING
25	LSA	IN	MECHANISM MODE DETECT(A)
26	LSB	IN	MECHANISM MODE DETECT(B)
27	LSC	IN	MECHANISM MODE DETECT(C)
28	CAP_REV(L)	OUT	CAPSTAN MOTOR REVERSE CONTROL (FWD:H/REV:L)
29	RC	IN	REMOTE CONTROL DATA INPUT
30	LOCK(L)	IN	TUNING PLL LOCK DETECT:L
31	P50_IN	IN	CONTROL SIGNAL FOR TV LINK
32	ET_PB(H)/AGC_CTL	IN	NC
33	FRONT(H)/EXP1_DATA	OUT	FRONT INPUT:H/NC
34	P50_OUT/M_PULSE	OUT	CONTROL SIGNAL FOR TV LINK/NC
35	LMC1	OUT	LOADING MOTOR DRIVE(1)
36	LMC2	OUT	LOADING MOTOR DRIVE(2)
37	LMC3	OUT	LOADING MOTOR DRIVE(3)
38	SB_G(PWM)	OUT	VOLTAGE CONTROL SIGNAL FOR VIDEO FREQUENCY RESPONSE
39	STB/TEST	OUT	STROBE SIGNAL (FOR FDP DRIVER)
40	POWER_DET	IN	DETECTION SIGNAL FOR POWER DOWN OF AC POWER SUPPLY
41	REC_SAFETY	IN	REC SAFETY SWITCH DETECT (SW ON:L)
42	PROTECT	IN	DETECTION SIGNAL FOR SW POWER SUPPLY
43	VSS	-	GND
44	RMO/ANT_CTL(H)	OUT	REMOTE CONTROL OUTPUT FOR SATELLITE RECEIVER/NC
45	VCC	-	SYSTEM POWER
46	SUB_DATA_IN/KBUS_DATA_IN	IN/OUT	SERIAL DATA TRANSFER INPUT FOR SUB CPU/NC
47	SUB_DATA_OUT/KBUS_DATA_OUT	IN/OUT	SERIAL DATA TRANSFER OUTPUT FOR SUB CPU/NC
48	SUB_CLK/KBUS_CLK	OUT	SERIAL DATA TRANSFER CLOCK FOR SUB CPU/NC
49	I2C_DATA_AV	IN/OUT	SERIAL DATA TRANSFER OUTPUT FOR THE VIDEO/AUDIO IC
50	I2C_CLK_AV	OUT	SERIAL DATA TRANSFER CLOCK FOR THE VIDEO/AUDIO IC
51	S.DATA_TOSYS	IN	SERIAL DATA TRANSFER OUTPUT FROM THE ON-SCREEN IC TO THE FDP DRIVER
52	S.DATA_FRSYS	OUT	SERIAL DATA TRANSFER OUTPUT FROM THE FDP DRIVER TO THE ON-SCREEN IC
53	S.CLK	OUT	SERIAL DATA TRANSMISSION CLOCK FROM THE FDP DRIVER TO THE ON-SCREEN IC
54	SP_FG	IN	DETECTION SIGNAL FOR SUPPLY REEL ROTATION/TAPE REMAIN
55	TU_FG	IN	DETECTION SIGNAL FOR TAKE-UP REEL ROTATION/TAPE REMAIN
56	JUST/EDS(H)/SECAM	IN	NC

PIN NO.	LABEL	IN/OUT	FUNCTION
57	TU_CE	OUT	CHIP ENABLE OF THE TUNER UNIT
58	N.REC_ST(H)	OUT	NORMAL AUDIO SOUND RECORDING START
59	SP_CONV/BS/KBUS_REQ	IN	AUDIO INPUT SWITCHING FOR DV
60	TU_CLK	OUT	CLOCK FOR DATA TRANSFER TO THE TUNER UNIT
61	TU_DATA	OUT	TUNING DATA
62	FWE	-	NC
63	NMI(L)	-	NC
64	X2	-	TIMER CLOCK (32.768KHz)
65	X1	-	TIMER CLOCK (32.768KHz)
66	RES(L)	-	RESET TERMINAL (RESET ON:L)
67	OSC1(IN)	-	MAIN SYSTEM CLOCK(10MHz)
68	VSS	-	GND
69	OSC2(OUT)	-	MAIN SYSTEM CLOCK(10MHz)
70	VCC	-	SYSTEM POWER
71	MODE	-	NC
72	TU_A_MUTE(H)	OUT	TUNER AUDIO MUTE CONTROL (MUTE:H)
73	TU_V_MUTE(H)	OUT	TUNER VIDEO CONTROL (MUTE:H)
74	A.MUTE(H)	OUT	AUDIO MUTE CONTROL (MUTE:H)
75	I2C_CLK2	OUT	SERIAL DATA TRANSFER CLOCK FOR MEMORY IC
76	I2C_DATA2	IN/OUT	SERIAL DATA TRANSFER OUTPUT FOR MEMORY IC
77	DV_A.MUTE/FF/REW(L)	OUT	DV AUDIO MUTE CONTROL (MUTE:H)/NC/NC
78	DV_P.MUTE(H)	OUT	DV PICTURE MUTE CONTROL (MUTE:H)
79	SUB_RESET/EXP_CLK	OUT	SUB CPU RESET/NC
80	V.PCTL	OUT	V.PULSE CONTROL, V COMPENSATION DURING SPECIAL PLAYBACK
81	EDS_CS/PAL.PB(H)	OUT	NC/PLAYBACK MODE FOR PAL:H
82	VCC	-	SYSTEM POWER
83	SLOW_P/CNR_CTL	OUT	MEMORY TIMING CONTROL IN THE SLOW MODE / NC
84	VSS	-	GND
85	SP_SHORT(H)	OUT	MODE SELECT
86	LP_SHORT(H)	OUT	MODE SELECT
87	FLY_ON(H)/VHS(H)	OUT	FLYING ERASE ON:H/NC
88	H.REC_ST(H)	OUT	HIFI AUDIO SOUND RECORDING START
89	TRICK(H)/M_TRICK(L)	OUT	SPECIAL PLAYBACK: H/REC AFC FILTER, PB APC FILTER, BURST ACC FILTER, COLOR KILLER DET FILTER
90	B.BACK(H)/P.SAVE(L)	OUT	BLUE BACK MODE:H/NC
91	OSD_CS	OUT	CHIP SELECT FOR THE ON-SCREEN IC
92	SYNC_DET(H)	IN	DETECTION OF VIDEO SYNC SIGNAL (DETECTED:H)
93	BS_P.CTL(H)/MESECAM(H)	OUT	NC/MESECAM:H
94	JSB/STLB/S1_DC	IN	INPUT FOR THE JOG SHUTTLE/NC
95	SHTL(L)/JOGA	IN	INPUT FOR THE JOG SHUTTLE
96	S_CASS(H)	IN	DETECTION SIGNAL FOR S VHS CASSETTE (S VHS:H)
97	JSA/STLA	IN	INPUT FOR THE JOG SHUTTLE
98	C.SYNC	IN	COMPOSITE SYNC
99	A.FF	OUT	AUDIO FF OUTPUT
100	V.FF	OUT	ROTATION DETECTION SIGNAL FOR DRUM MOTOR/TIMING CONTROL SIGNAL FOR REC
101	CAPPWM	OUT	CAPSTAN MOTOR CONTROL
102	DRUMPWM	OUT	DRUM MOTOR CONTROL
103	SUB_OSD_ON/V_UP(H)	OUT	OSD IC CONTROL FOR MULTI DUBBING DISPLAY MODE:H/NC
104	SUB_CS/EXP2_DATA	OUT	TRANSMISSION START SIGNAL TO SUB CPU/NC
105	SP(H)	-	NC
106	P.MUTE(L)	OUT	PICTURE CONTROL (MUTE:L)
107	DPG	IN	DRUM PICKUP PULSE INPUT (SWITCHING PULSE)
108	DFG	IN	DRUM FG PULSE INPUT
109	VCC	-	SYSTEM POWER
110	V.PULSE	OUT	V.PULSE ADDITION TIMING CONTROL
111	VSS	-	GND
112	CTLREF	-	CTL REFERENCE VOLTAGE

4.37 SYSTEM CONTROL BLOCK DIAGRAM (VHS)

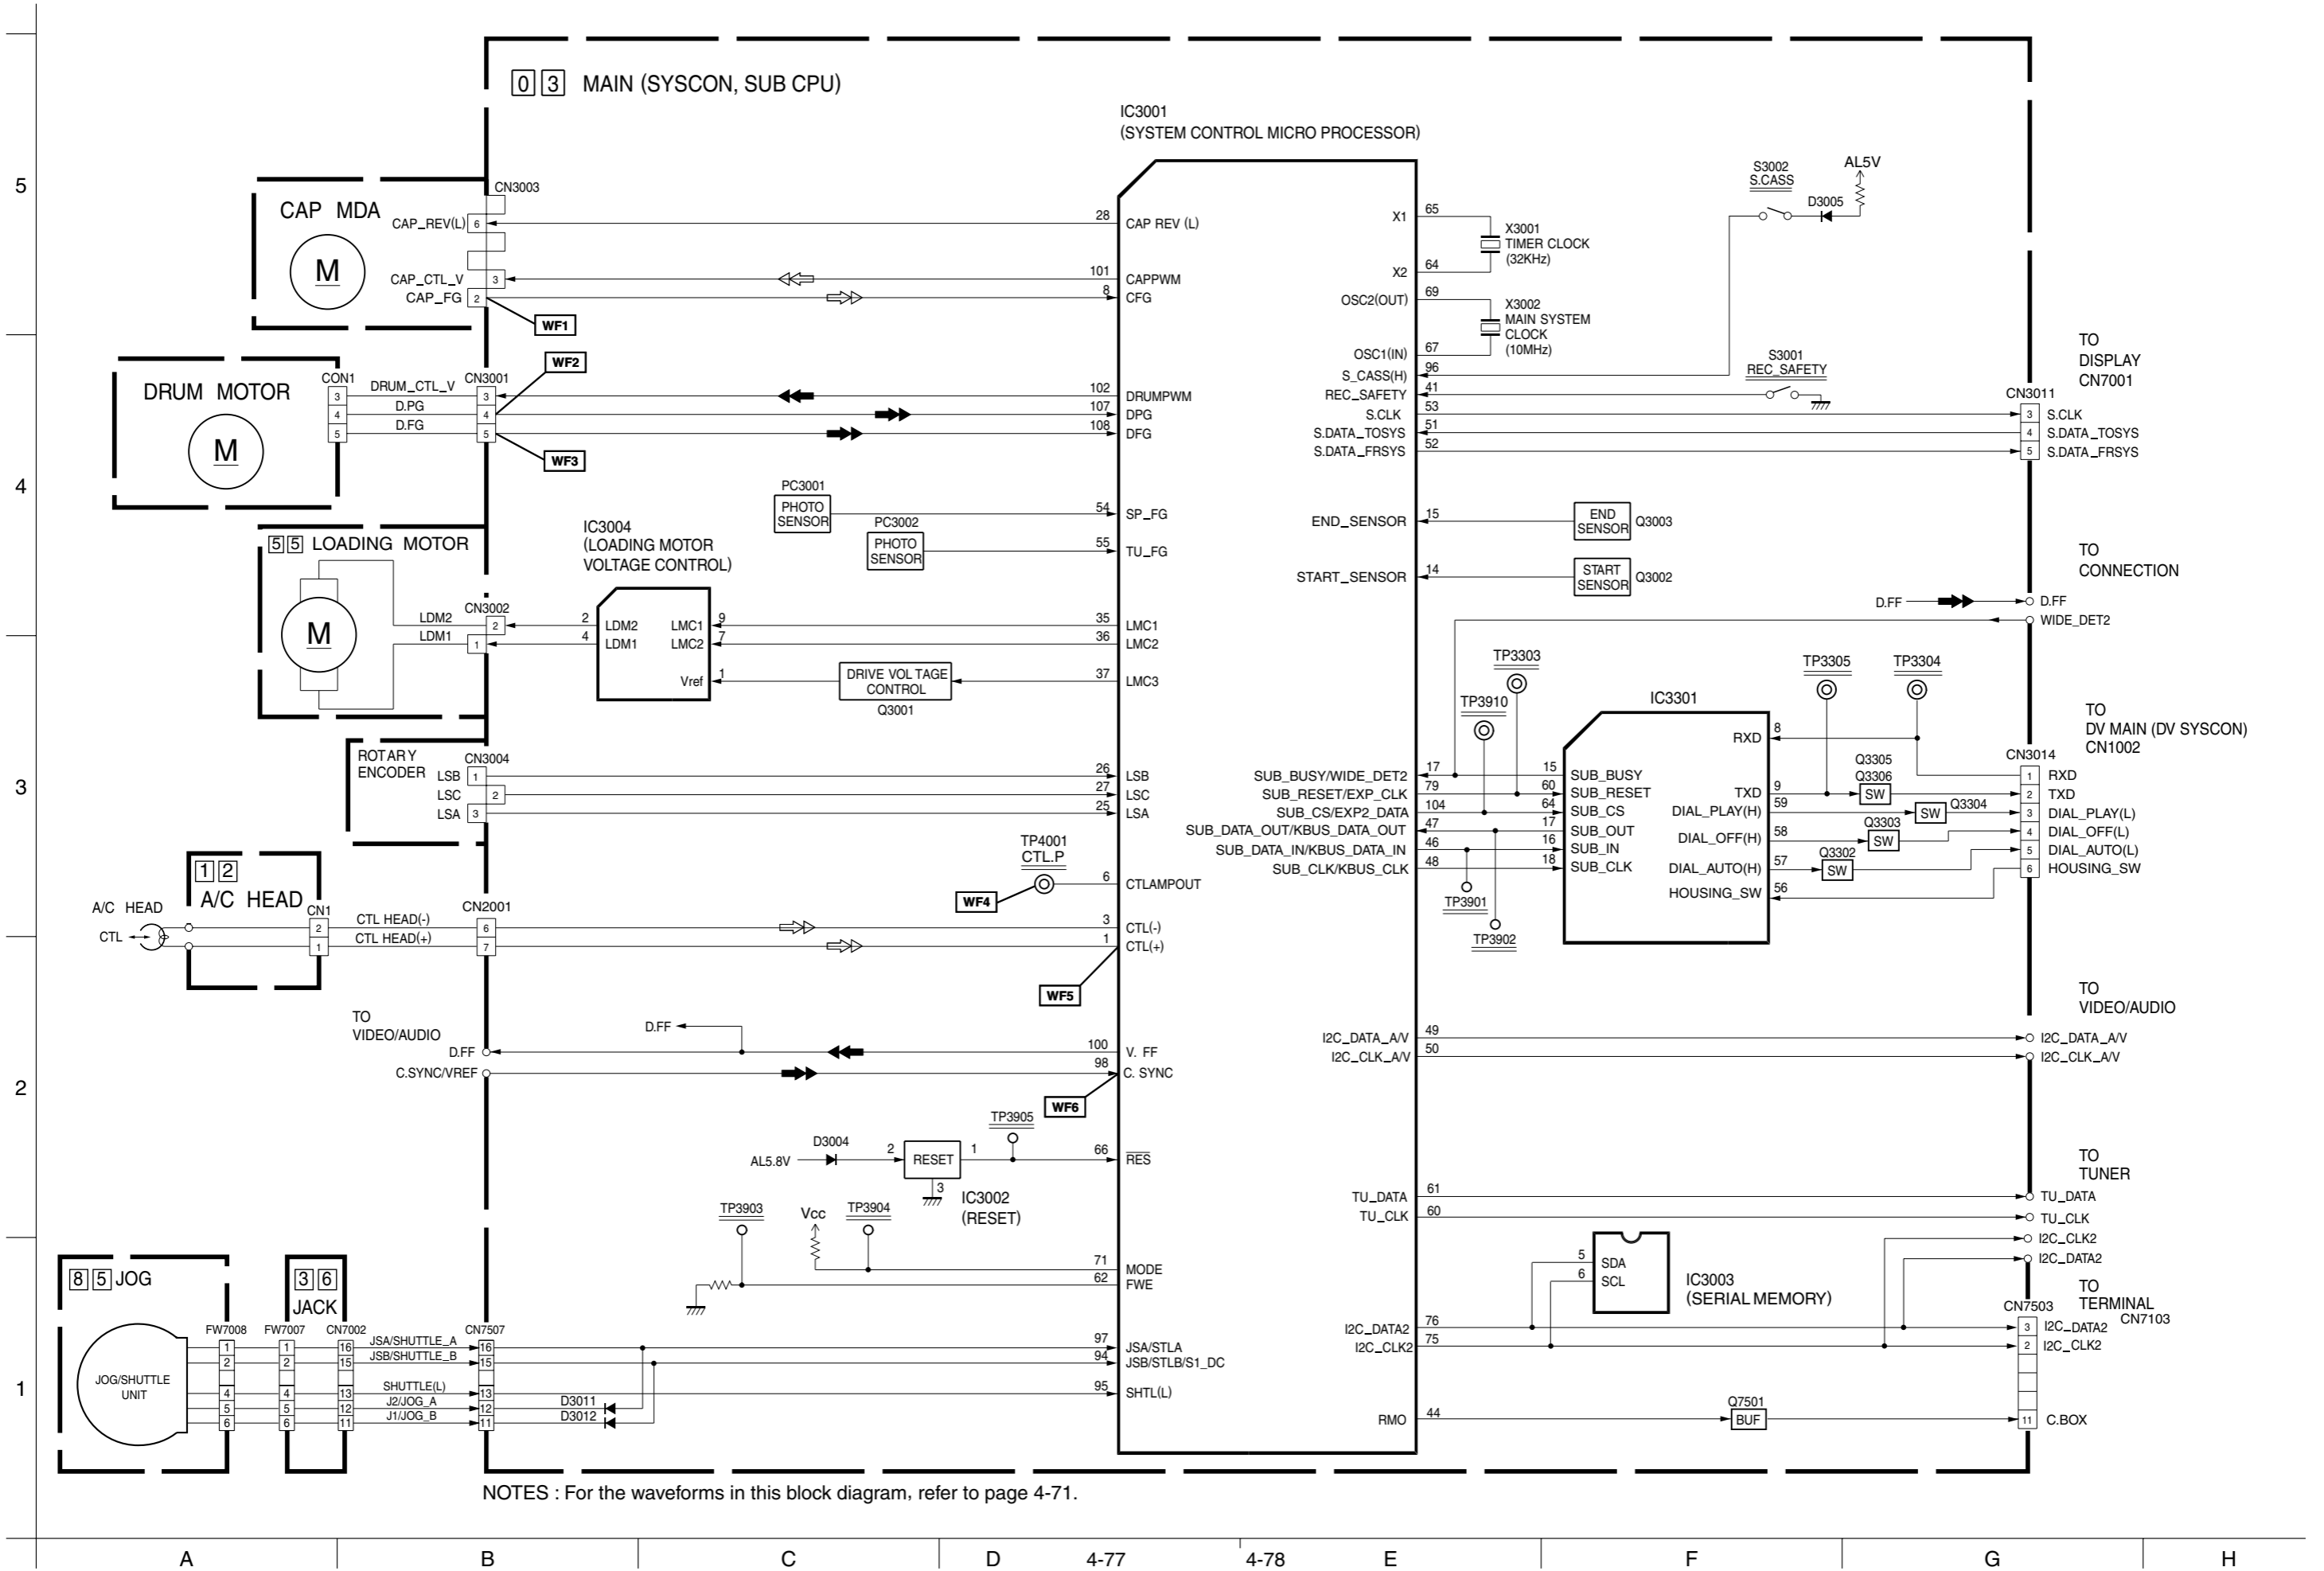

A

B

C

D

4-77

4-78

E

F

G

H

4.38 VIDEO BLOCK DIAGRAM (VHS)


5

4

3

2

1

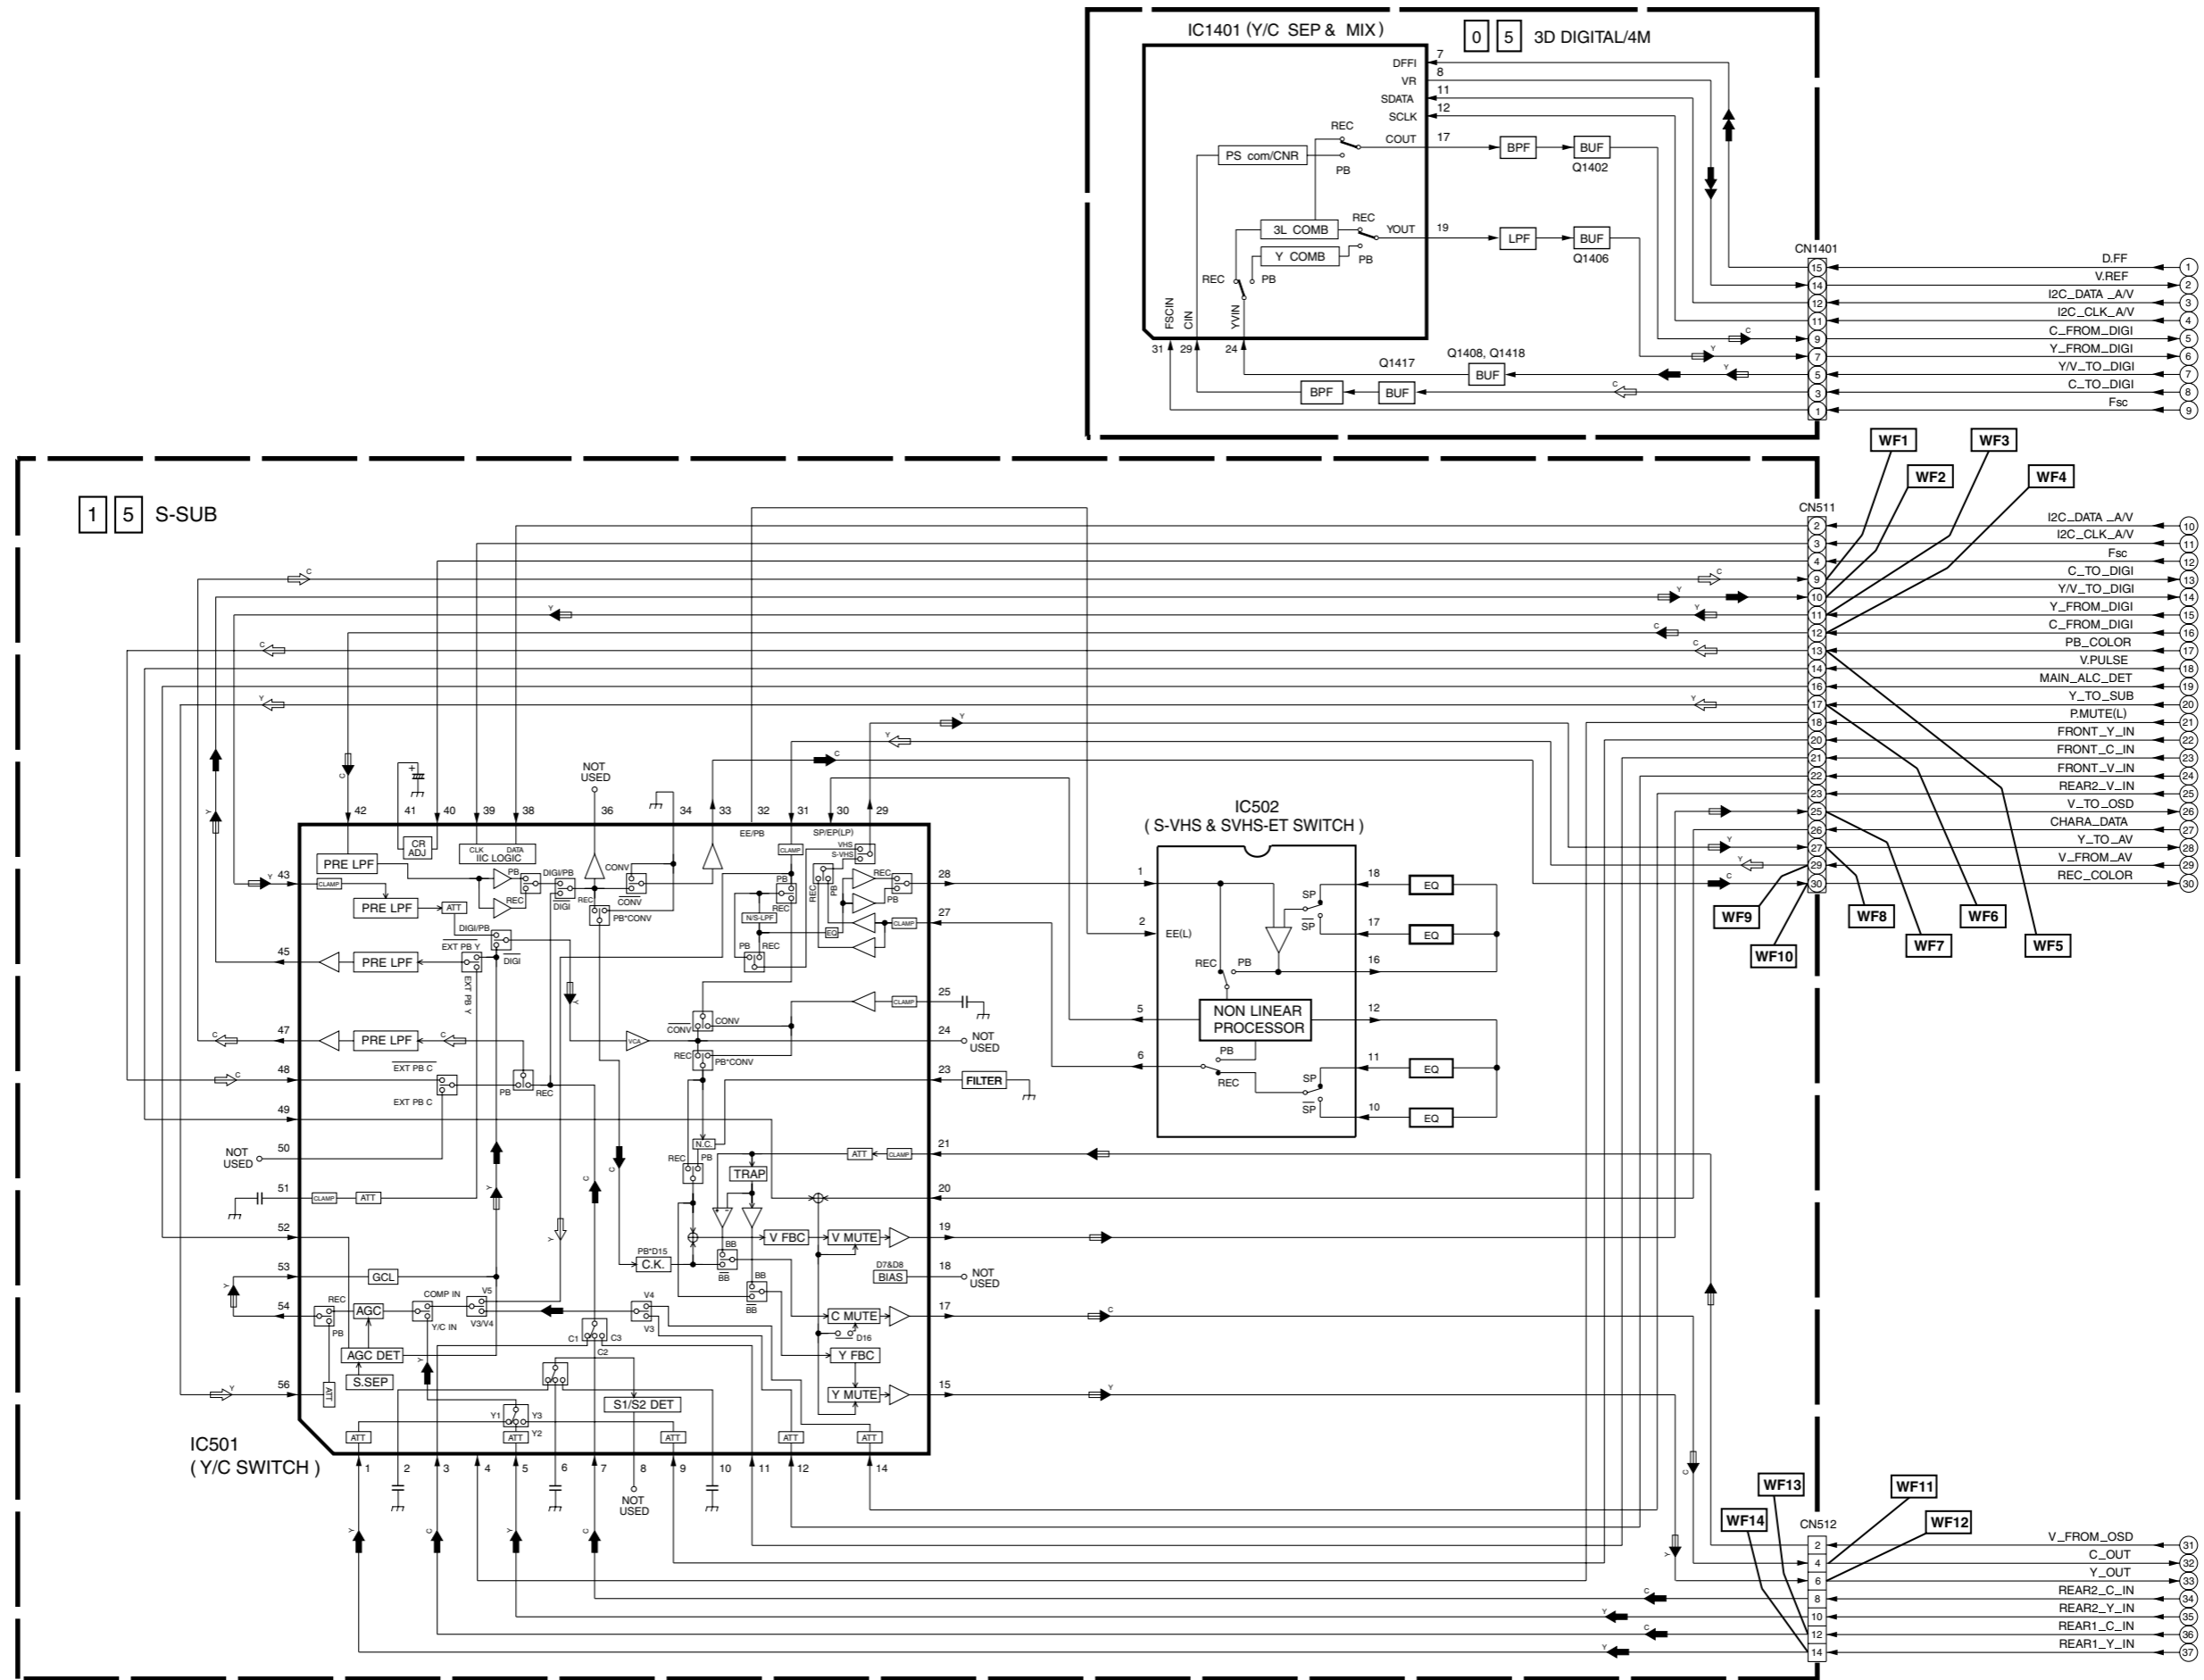

NOTES : For the waveforms in this block diagram, refer to page 4-71.

A

B

C

D 4-79


4-80

E

F

G

H

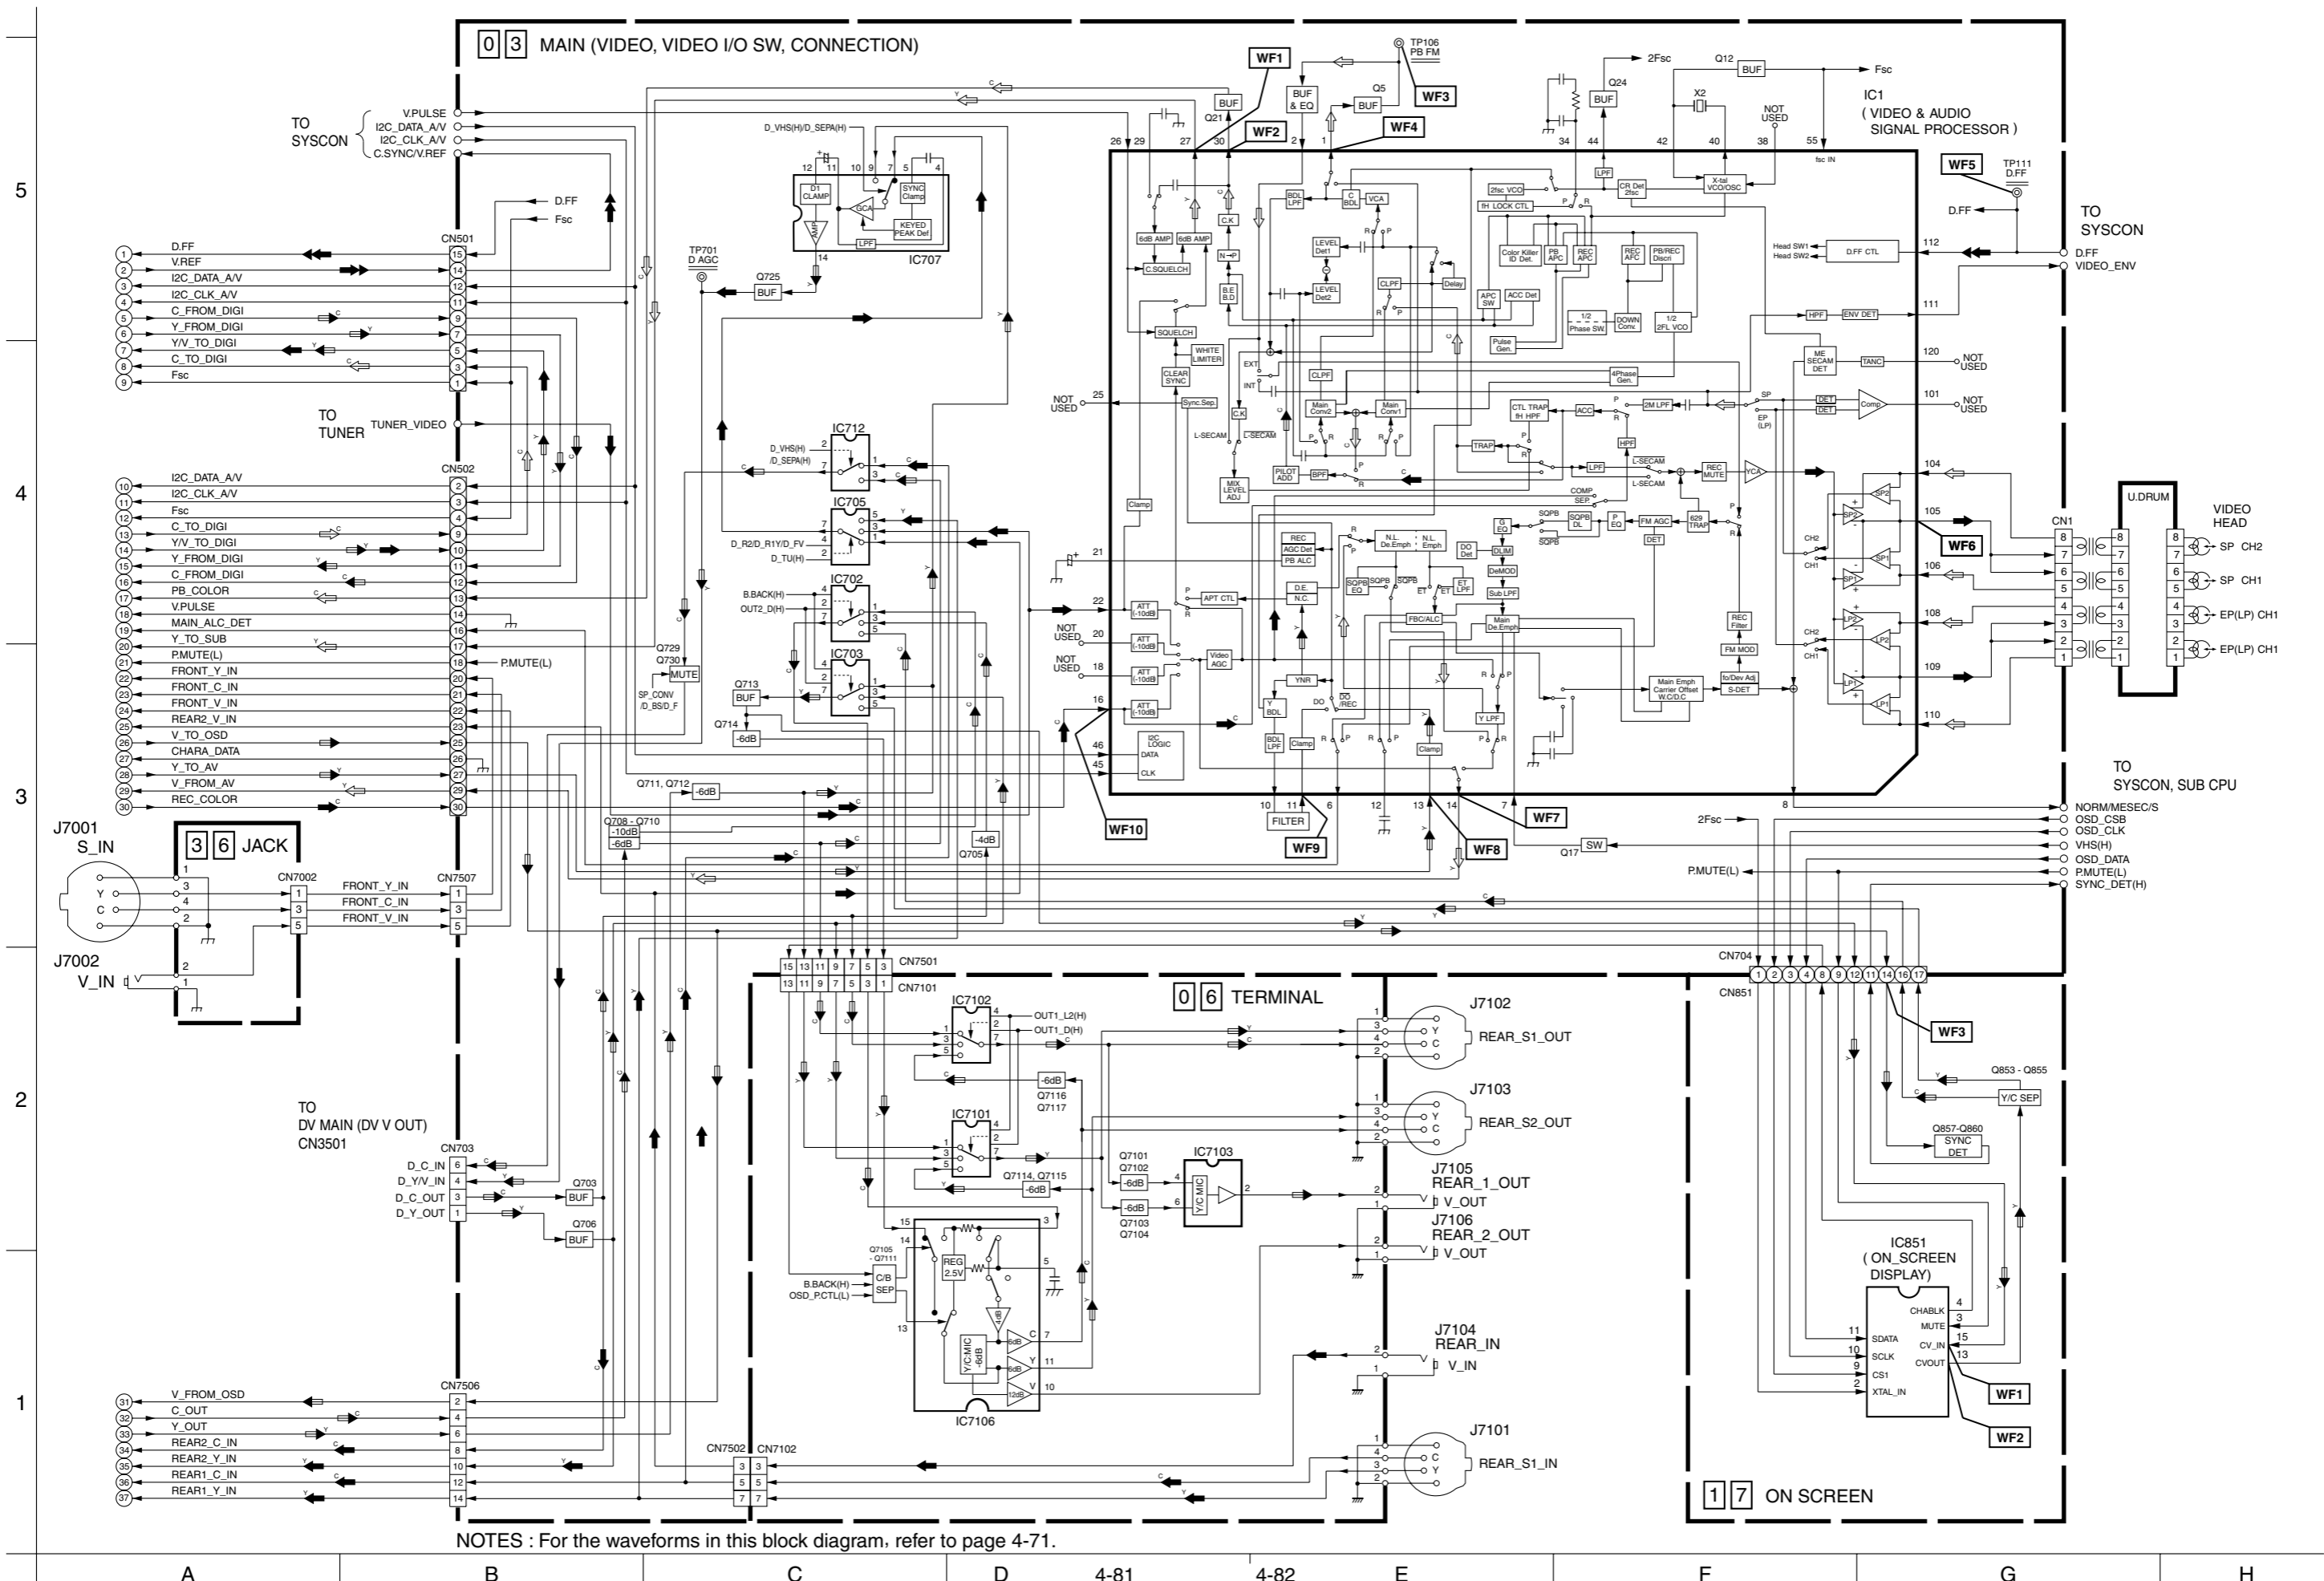


NOTES : For the waveforms in this block diagram, refer to page 4-71.

A B C D 4-81 4-82 E F G H


5
4
3
2
1

4.39 AUDIO BLOCK DIAGRAM (VHS)

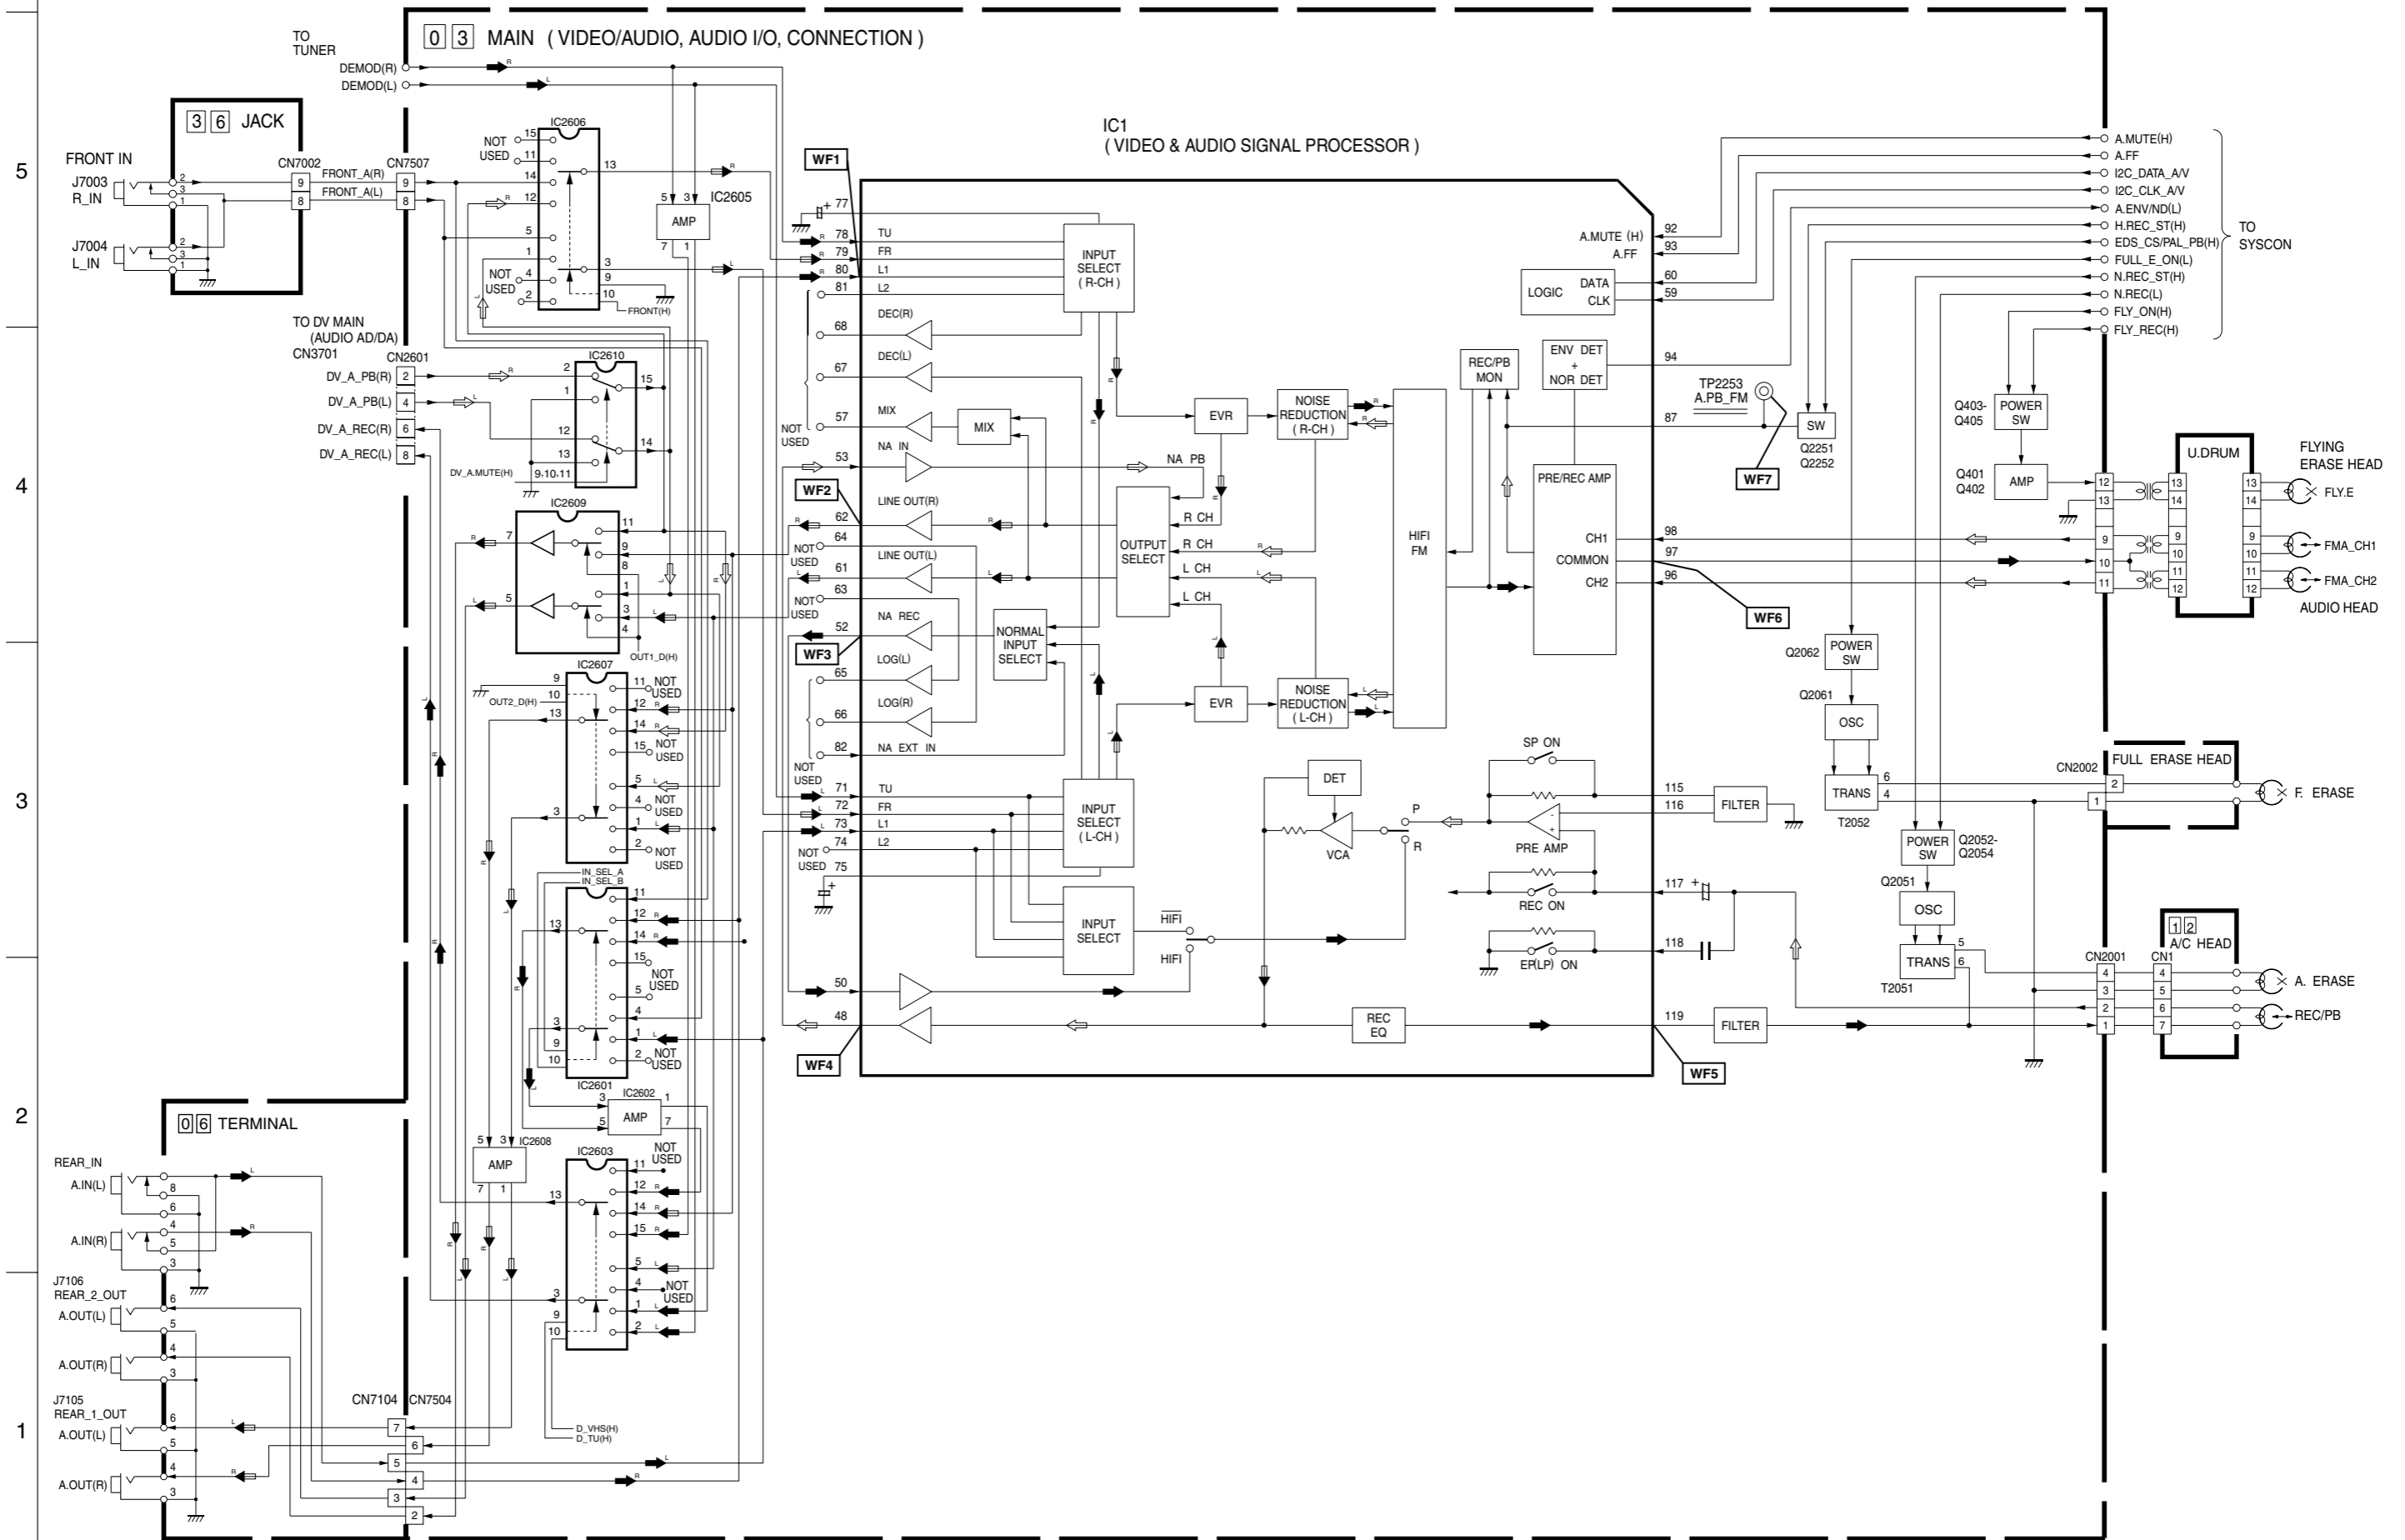

NOTES : For the waveforms in this block diagram, refer to page 4-71.

4.40 SYSTEM CONTROL BLOCK DIAGRAM (DV)

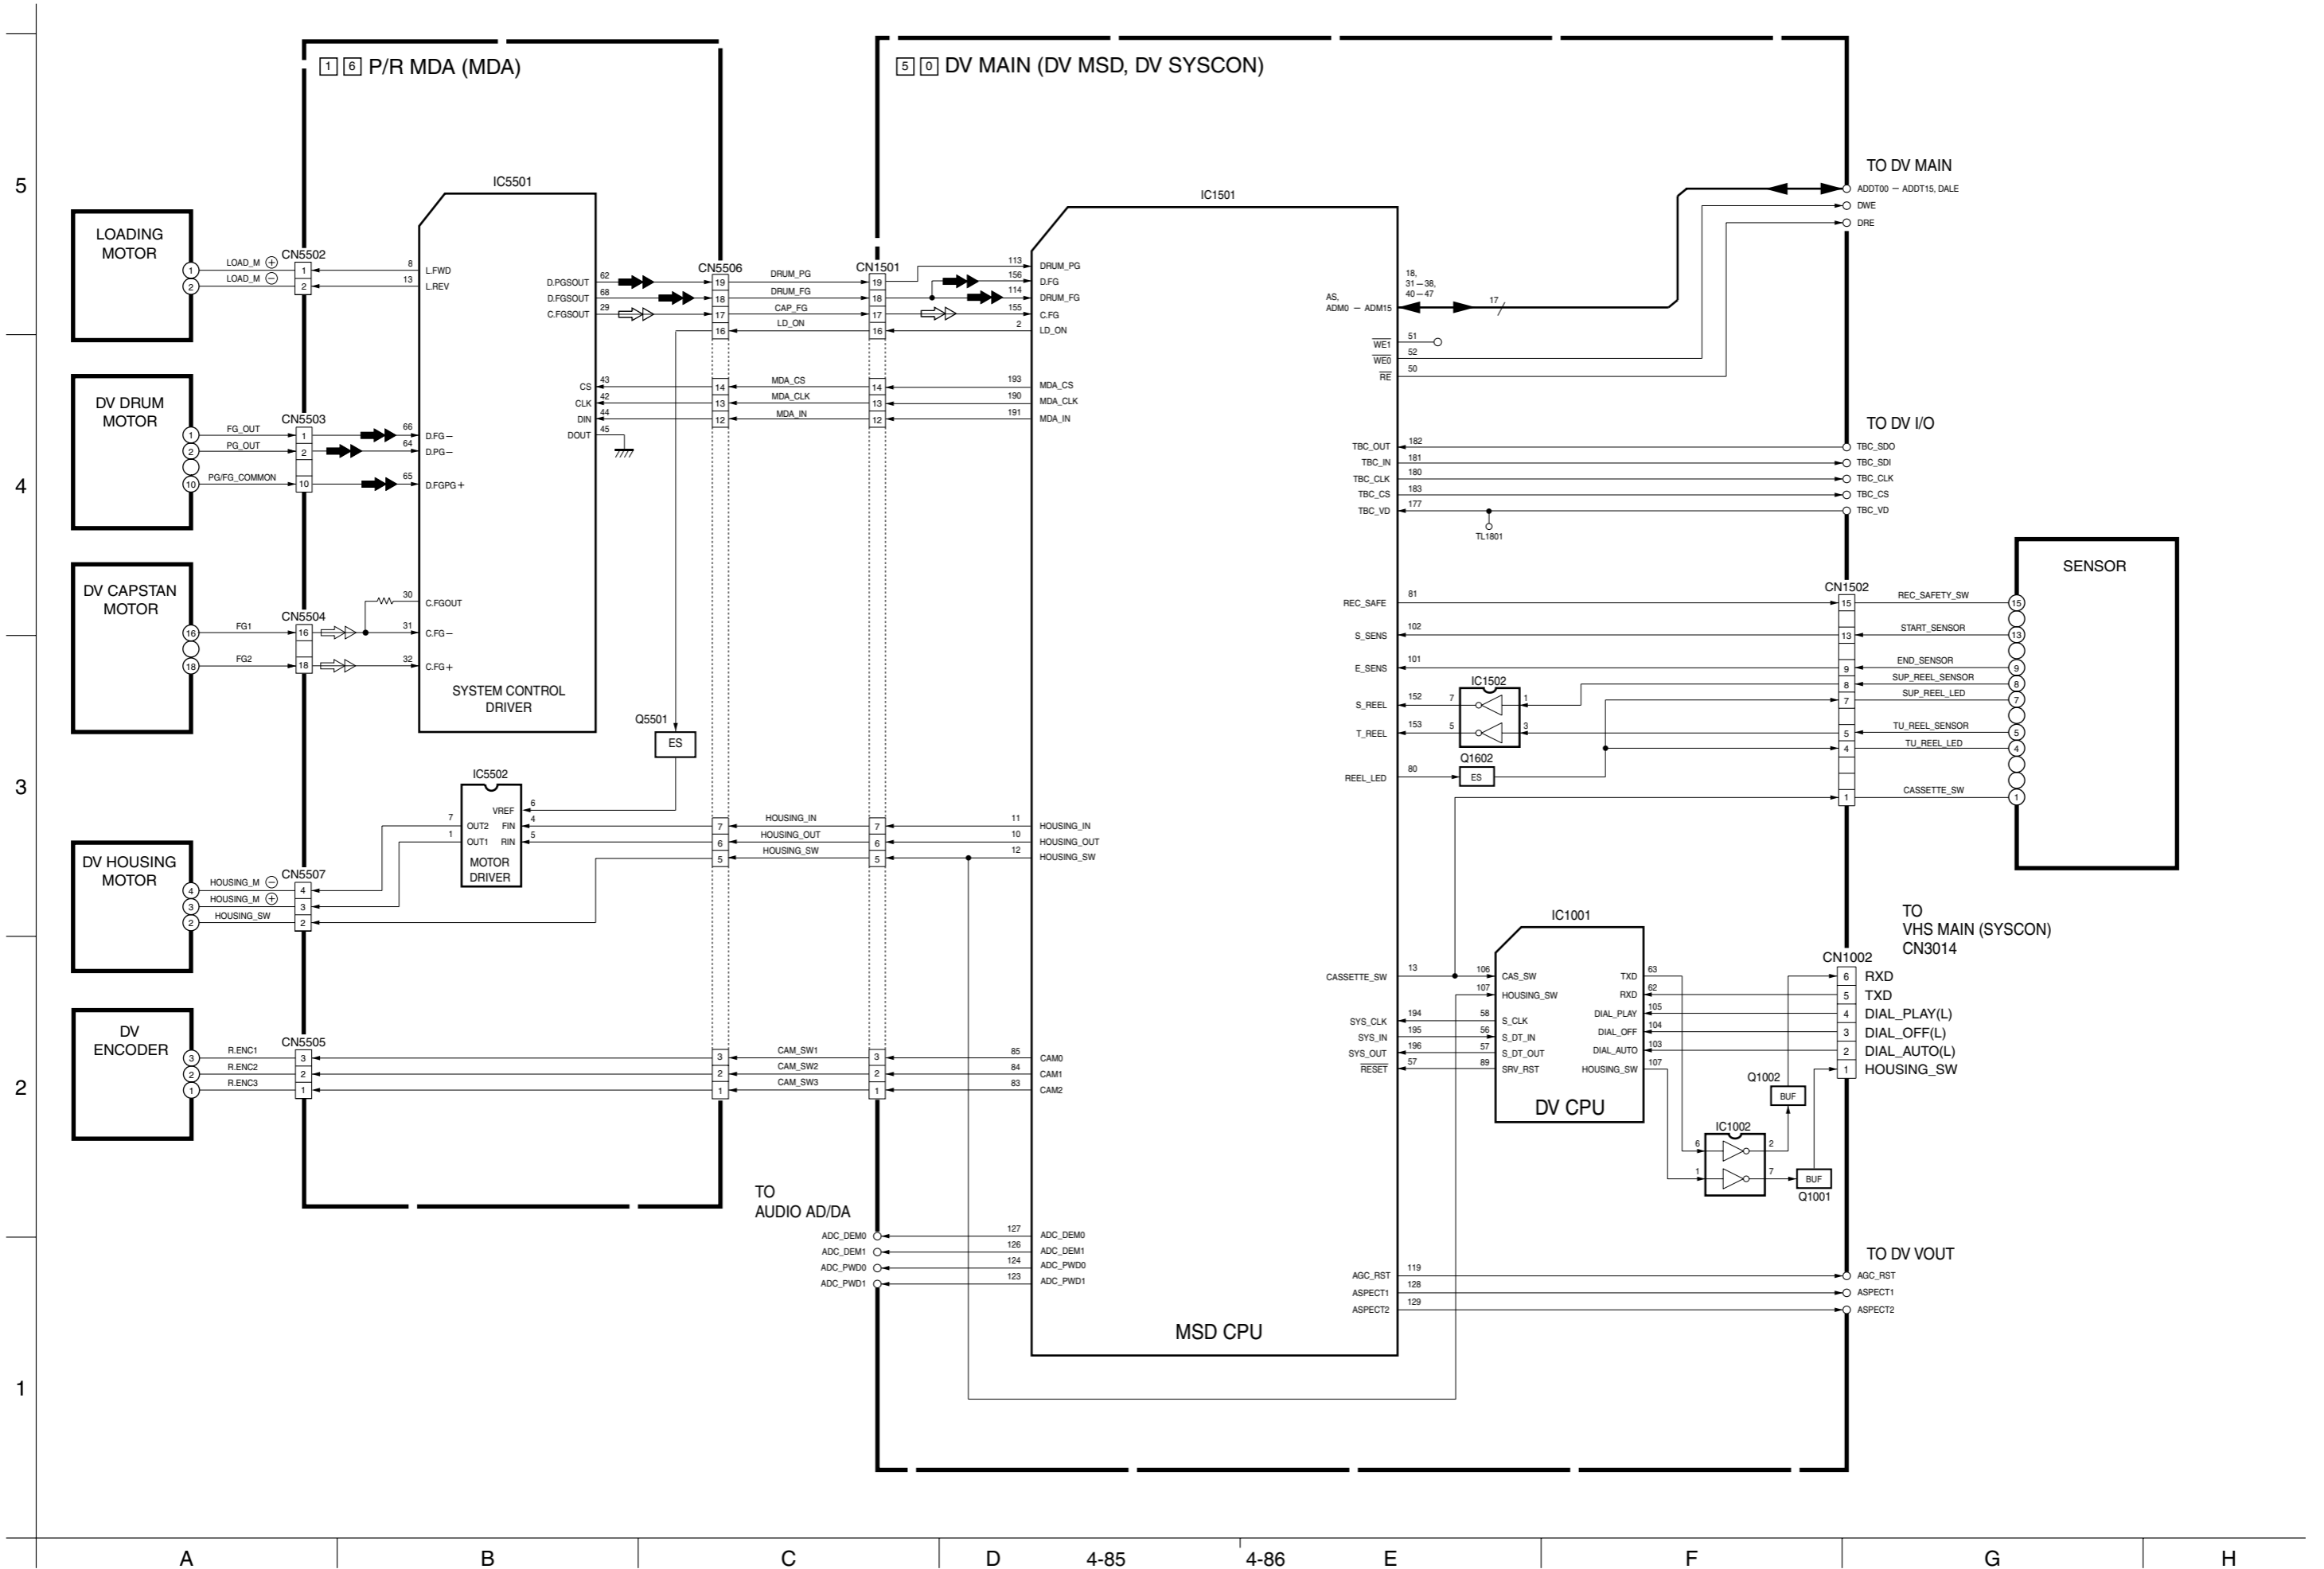

4.41 VIDEO BLOCK DIAGRAM (DV)

