

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## General Purpose Transistors

### NPN and PNP Silicon

These transistors are designed for general purpose amplifier applications. They are housed in the SOT-323/SC-70 package which is designed for low power surface mount applications.

#### Features

- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector - Emitter Voltage MMBT3904WT1 MMBT3906WT1	$V_{CEO}$	40 -40	Vdc
Collector - Base Voltage MMBT3904WT1 MMBT3906WT1	$V_{CBO}$	60 -40	Vdc
Emitter - Base Voltage MMBT3904WT1 MMBT3906WT1	$V_{EBO}$	6.0 -5.0	Vdc
Collector Current - Continuous MMBT3904WT1 MMBT3906WT1	$I_C$	200 -200	mAdc

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation (Note 1) @ $T_A = 25^\circ\text{C}$	$P_D$	150	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$



Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Device mounted on FR4 glass epoxy printed circuit board using the minimum recommended footprint.




ON Semiconductor®

<http://onsemi.com>



SC-70 (SOT-323)  
CASE 419  
STYLE 3

#### MARKING DIAGRAM



xx = AM for MMBT3904WT1  
= 2A for MMBT3906WT1  
M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### ORDERING INFORMATION

Device	Package	Shipping†
MMBT3904WT1G	SC-70/ SOT-323 (Pb-Free)	3000/Tape & Reel
MMBT3906WT1G	SC-70/ SOT-323 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector – Emitter Breakdown Voltage (Note 2) (I <sub>C</sub> = 1.0 mA <sub>dc</sub> , I <sub>B</sub> = 0) (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , I <sub>B</sub> = 0)	MMBT3904WT1 MMBT3906WT1	V <sub>(BR)CEO</sub>	40 -40	- -	V <sub>dc</sub>
Collector – Base Breakdown Voltage (I <sub>C</sub> = 10 μA <sub>dc</sub> , I <sub>E</sub> = 0) (I <sub>C</sub> = -10 μA <sub>dc</sub> , I <sub>E</sub> = 0)	MMBT3904WT1 MMBT3906WT1	V <sub>(BR)CBO</sub>	60 -40	- -	V <sub>dc</sub>
Emitter – Base Breakdown Voltage (I <sub>E</sub> = 10 μA <sub>dc</sub> , I <sub>C</sub> = 0) (I <sub>E</sub> = -10 μA <sub>dc</sub> , I <sub>C</sub> = 0)	MMBT3904WT1 MMBT3906WT1	V <sub>(BR)EBO</sub>	6.0 -5.0	- -	V <sub>dc</sub>
Base Cutoff Current (V <sub>CE</sub> = 30 V <sub>dc</sub> , V <sub>EB</sub> = 3.0 V <sub>dc</sub> ) (V <sub>CE</sub> = -30 V <sub>dc</sub> , V <sub>EB</sub> = -3.0 V <sub>dc</sub> )	MMBT3904WT1 MMBT3906WT1	I <sub>BL</sub>	- -	50 -50	nA <sub>dc</sub>
Collector Cutoff Current (V <sub>CE</sub> = 30 V <sub>dc</sub> , V <sub>EB</sub> = 3.0 V <sub>dc</sub> ) (V <sub>CE</sub> = -30 V <sub>dc</sub> , V <sub>EB</sub> = -3.0 V <sub>dc</sub> )	MMBT3904WT1 MMBT3906WT1	I <sub>CEx</sub>	- -	50 -50	nA <sub>dc</sub>
<b>ON CHARACTERISTICS (Note 2)</b>					
DC Current Gain (I <sub>C</sub> = 0.1 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> ) (I <sub>C</sub> = 1.0 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> ) (I <sub>C</sub> = 10 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> ) (I <sub>C</sub> = 50 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> ) (I <sub>C</sub> = 100 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> ) (I <sub>C</sub> = -0.1 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> ) (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> ) (I <sub>C</sub> = -10 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> ) (I <sub>C</sub> = -50 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> ) (I <sub>C</sub> = -100 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> )	MMBT3904WT1     MMBT3906WT1	h <sub>FE</sub>	40 70 100 60 30 60 80 100 60 30	- - 300 - - - - 300 - -	-
Collector – Emitter Saturation Voltage (I <sub>C</sub> = 10 mA <sub>dc</sub> , I <sub>B</sub> = 1.0 mA <sub>dc</sub> ) (I <sub>C</sub> = 50 mA <sub>dc</sub> , I <sub>B</sub> = 5.0 mA <sub>dc</sub> ) (I <sub>C</sub> = -10 mA <sub>dc</sub> , I <sub>B</sub> = -1.0 mA <sub>dc</sub> ) (I <sub>C</sub> = -50 mA <sub>dc</sub> , I <sub>B</sub> = -5.0 mA <sub>dc</sub> )	MMBT3904WT1  MMBT3906WT1	V <sub>CE(sat)</sub>	- - - -	0.2 0.3 -0.25 -0.4	V <sub>dc</sub>
Base – Emitter Saturation Voltage (I <sub>C</sub> = 10 mA <sub>dc</sub> , I <sub>B</sub> = 1.0 mA <sub>dc</sub> ) (I <sub>C</sub> = 50 mA <sub>dc</sub> , I <sub>B</sub> = 5.0 mA <sub>dc</sub> ) (I <sub>C</sub> = -10 mA <sub>dc</sub> , I <sub>B</sub> = -1.0 mA <sub>dc</sub> ) (I <sub>C</sub> = -50 mA <sub>dc</sub> , I <sub>B</sub> = -5.0 mA <sub>dc</sub> )	MMBT3904WT1  MMBT3906WT1	V <sub>BE(sat)</sub>	0.65 - -0.65 -	0.85 0.95 -0.85 -0.95	V <sub>dc</sub>

2. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit
<b>SMALL-SIGNAL CHARACTERISTICS</b>					
Current-Gain-Bandwidth Product ( $I_C = 10\text{ mAdc}$ , $V_{CE} = 20\text{ Vdc}$ , $f = 100\text{ MHz}$ ) ( $I_C = -10\text{ mAdc}$ , $V_{CE} = -20\text{ Vdc}$ , $f = 100\text{ MHz}$ )	MMBT3904WT1 MMBT3906WT1	$f_T$	300 250	- -	MHz
Output Capacitance ( $V_{CB} = 5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ ) ( $V_{CB} = -5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )	MMBT3904WT1 MMBT3906WT1	$C_{obo}$	- -	4.0 4.5	pF
Input Capacitance ( $V_{EB} = 0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ ) ( $V_{EB} = -0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ )	MMBT3904WT1 MMBT3906WT1	$C_{ibo}$	- -	8.0 10.0	pF
Input Impedance ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1 MMBT3906WT1	$h_{ie}$	1.0 2.0	10 12	k $\Omega$
Voltage Feedback Ratio ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1 MMBT3906WT1	$h_{re}$	0.5 0.1	8.0 10	$\times 10^{-4}$
Small-Signal Current Gain ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1 MMBT3906WT1	$h_{fe}$	100 100	400 400	-
Output Admittance ( $V_{CE} = 10\text{ Vdc}$ , $I_C = 1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -10\text{ Vdc}$ , $I_C = -1.0\text{ mAdc}$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1 MMBT3906WT1	$h_{oe}$	1.0 3.0	40 60	$\mu\text{mhos}$
Noise Figure ( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 100\text{ }\mu\text{A}$ , $R_S = 1.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ ) ( $V_{CE} = -5.0\text{ Vdc}$ , $I_C = -100\text{ }\mu\text{A}$ , $R_S = 1.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ )	MMBT3904WT1 MMBT3906WT1	NF	- -	5.0 4.0	dB

## SWITCHING CHARACTERISTICS

Characteristic	Condition		Symbol	Min	Max	Unit
Delay Time	( $V_{CC} = 3.0\text{ Vdc}$ , $V_{BE} = -0.5\text{ Vdc}$ ) ( $V_{CC} = -3.0\text{ Vdc}$ , $V_{BE} = 0.5\text{ Vdc}$ )	MMBT3904WT1 MMBT3906WT1	$t_d$	- -	35 35	ns
Rise Time	( $I_C = 10\text{ mAdc}$ , $I_{B1} = 1.0\text{ mAdc}$ ) ( $I_C = -10\text{ mAdc}$ , $I_{B1} = -1.0\text{ mAdc}$ )	MMBT3904WT1 MMBT3906WT1	$t_r$	- -	35 35	
Storage Time	( $V_{CC} = 3.0\text{ Vdc}$ , $I_C = 10\text{ mAdc}$ ) ( $V_{CC} = -3.0\text{ Vdc}$ , $I_C = -10\text{ mAdc}$ )	MMBT3904WT1 MMBT3906WT1	$t_s$	- -	200 225	ns
Fall Time	( $I_{B1} = I_{B2} = 1.0\text{ mAdc}$ ) ( $I_{B1} = I_{B2} = -1.0\text{ mAdc}$ )	MMBT3904WT1 MMBT3906WT1	$t_f$	- -	50 75	

### MMBT3904WT1

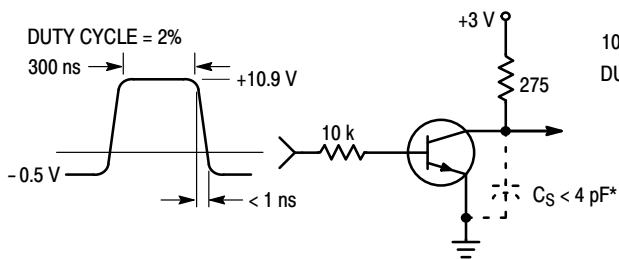


Figure 1. Delay and Rise Time  
Equivalent Test Circuit

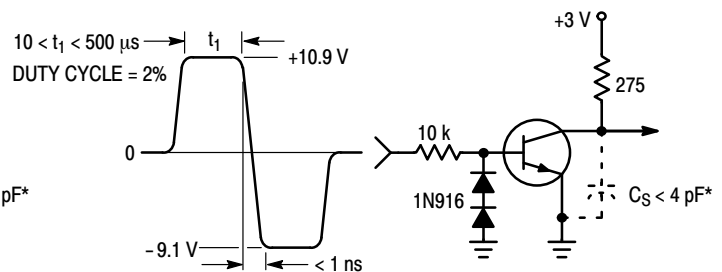


Figure 2. Storage and Fall Time  
Equivalent Test Circuit

\* Total shunt capacitance of test jig and connectors

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3904WT1

### TYPICAL TRANSIENT CHARACTERISTICS

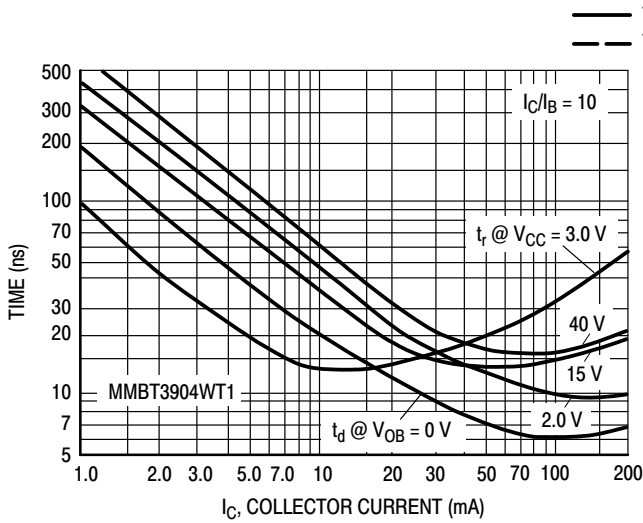


Figure 3. Turn-On Time

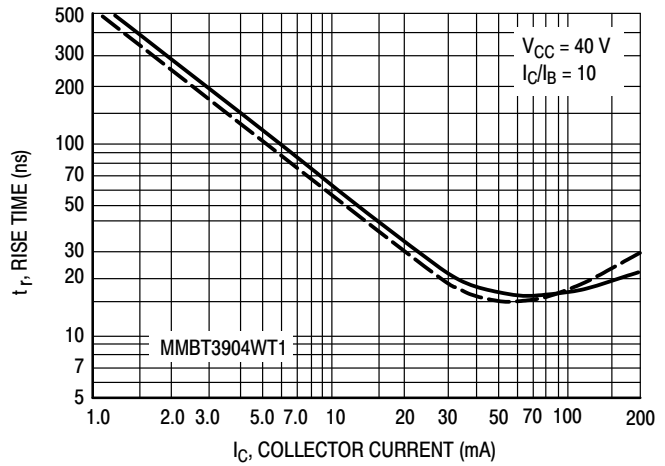


Figure 4. Rise Time

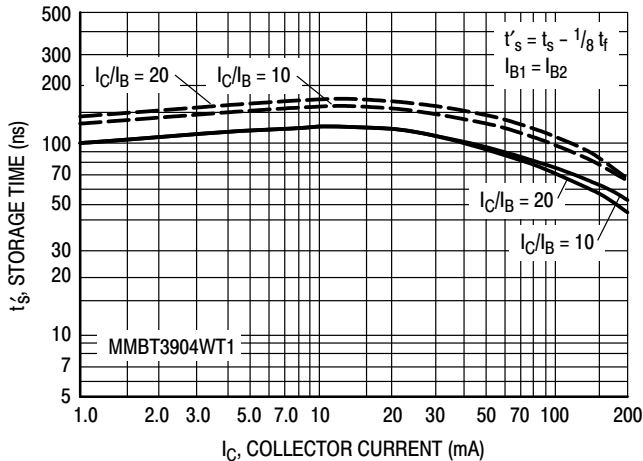


Figure 5. Storage Time

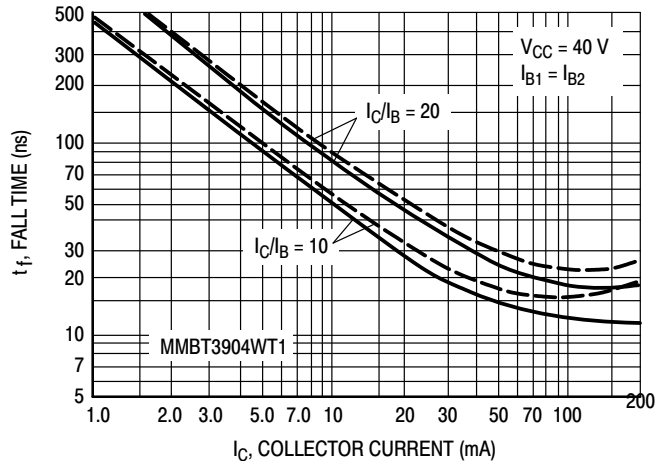


Figure 6. Fall Time

### TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

( $V_{CE} = 5.0\text{Vdc}$ ,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

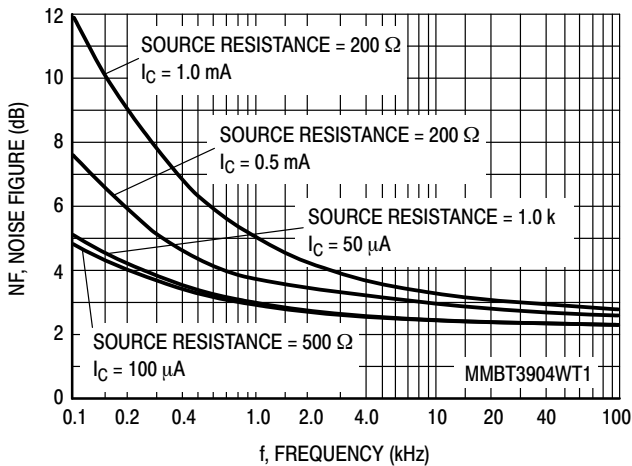


Figure 7. Noise Figure

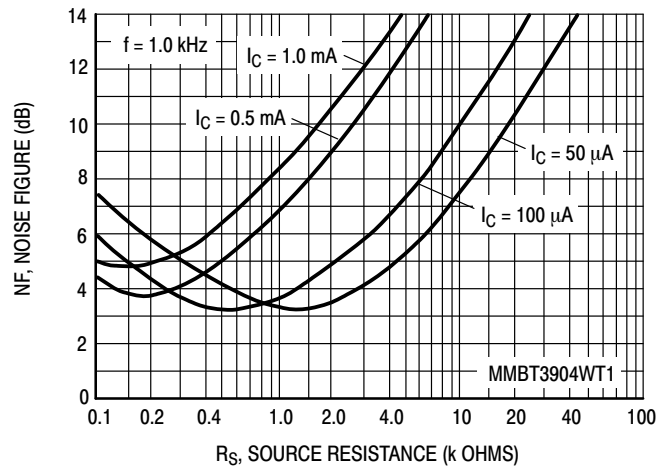


Figure 8. Noise Figure

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3904WT1

### h PARAMETERS

( $V_{CE} = 10 \text{ Vdc}$ ,  $f = 1.0 \text{ kHz}$ ,  $T_A = 25^\circ\text{C}$ )

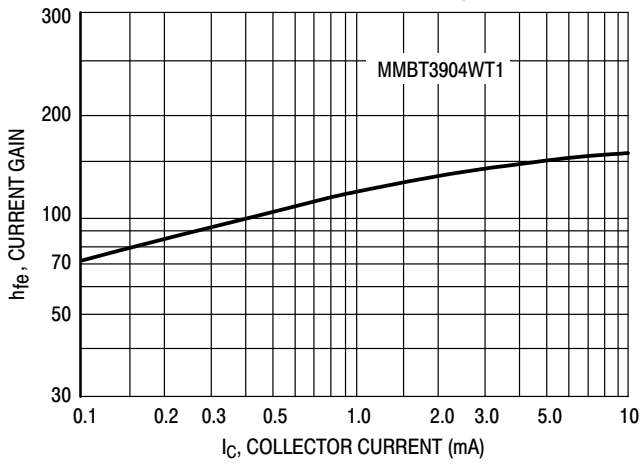


Figure 9. Current Gain

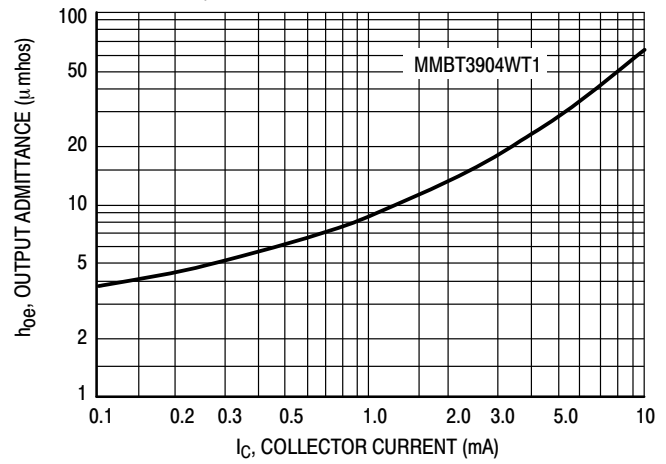


Figure 10. Output Admittance

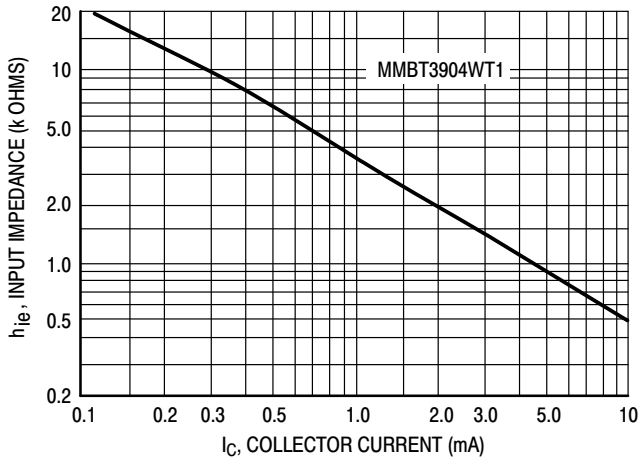


Figure 11. Input Impedance

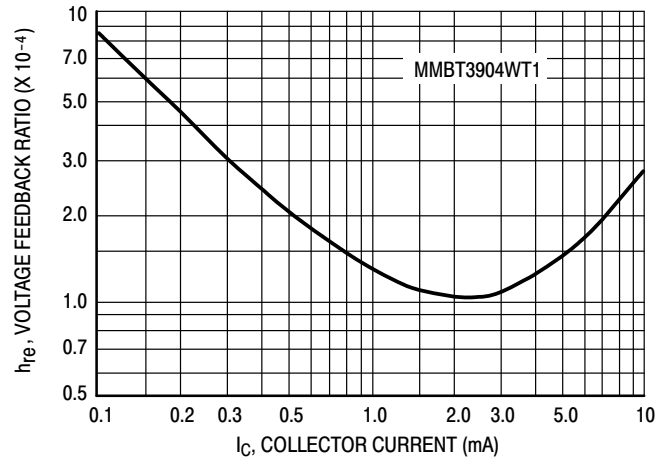


Figure 12. Voltage Feedback Ratio

### TYPICAL STATIC CHARACTERISTICS

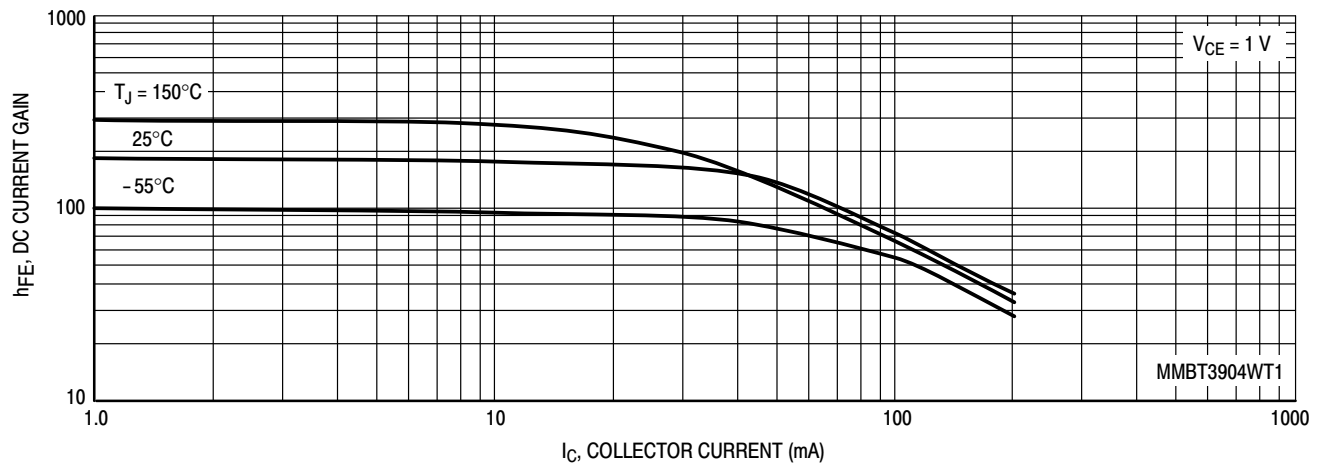


Figure 13. DC Current Gain

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3904WT1

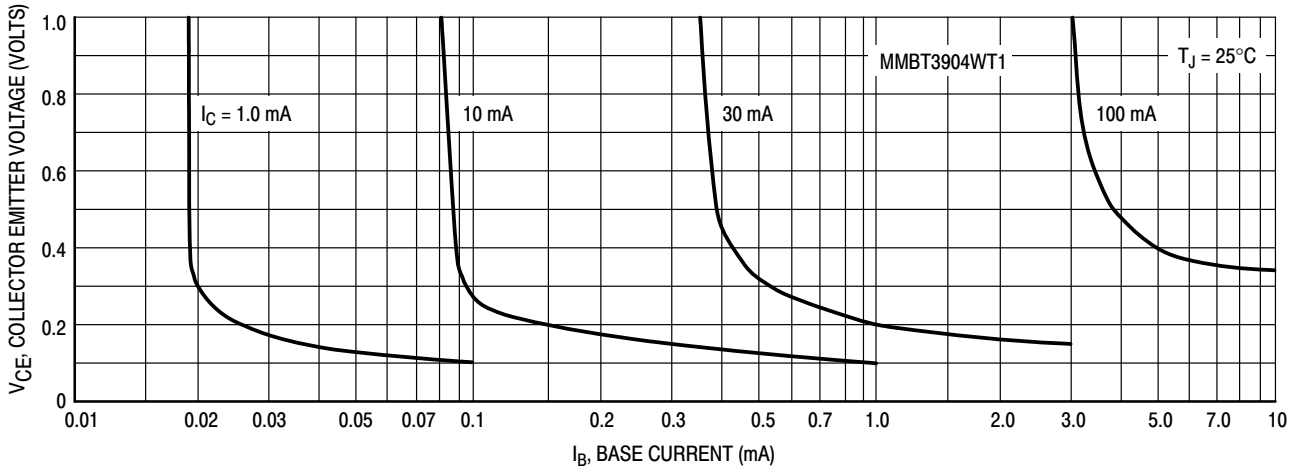


Figure 14. Collector Saturation Region

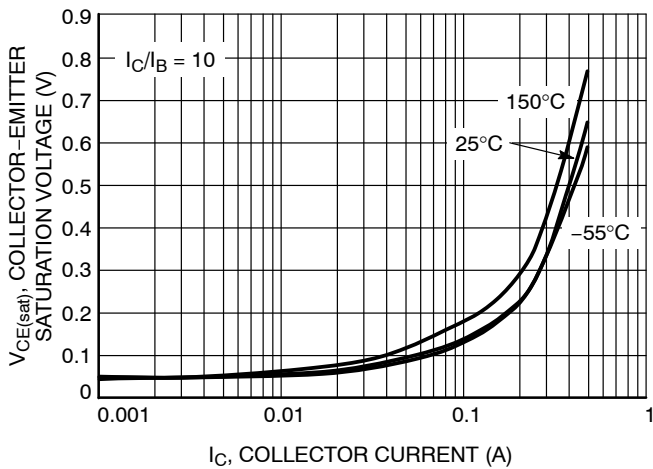


Figure 15. Collector Emitter Saturation Voltage vs. Collector Current

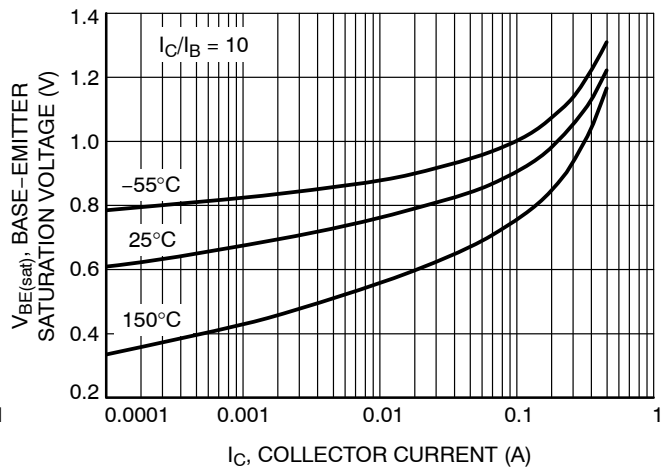


Figure 16. Base Emitter Saturation Voltage vs. Collector Current

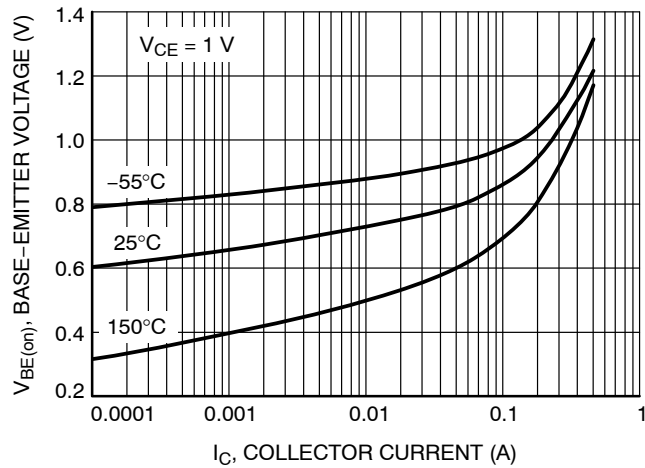


Figure 17. Base Emitter Voltage vs. Collector Current

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3904WT1

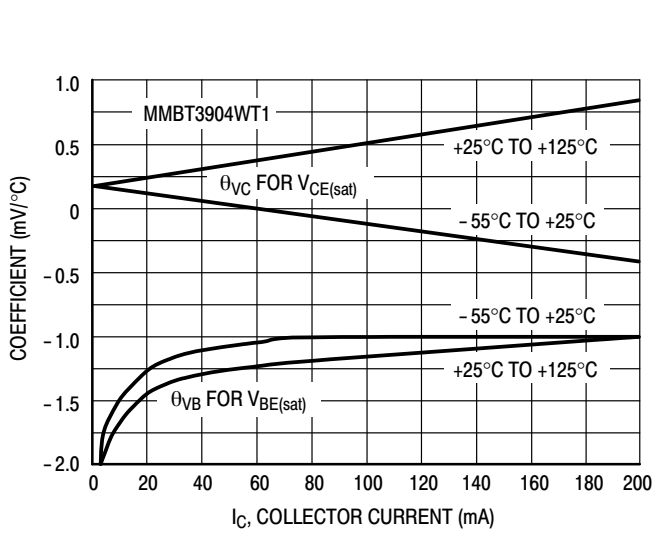


Figure 18. Temperature Coefficients

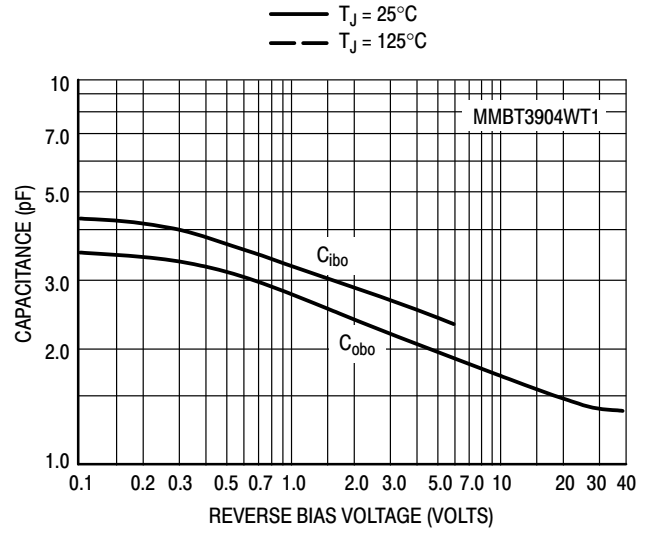


Figure 19. Capacitance

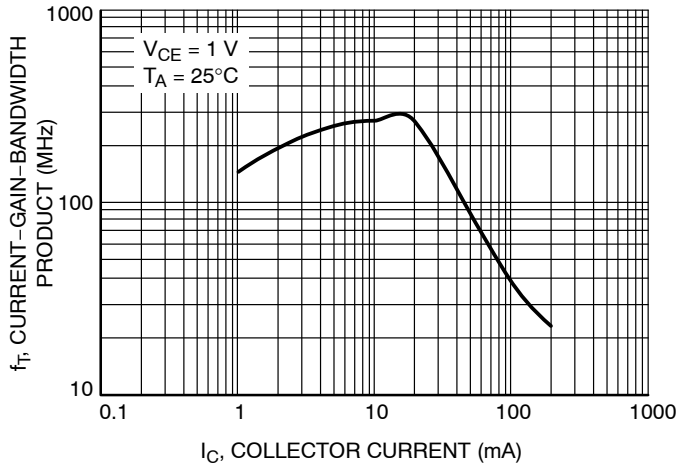


Figure 20. Current Gain Bandwidth Product vs. Collector Current

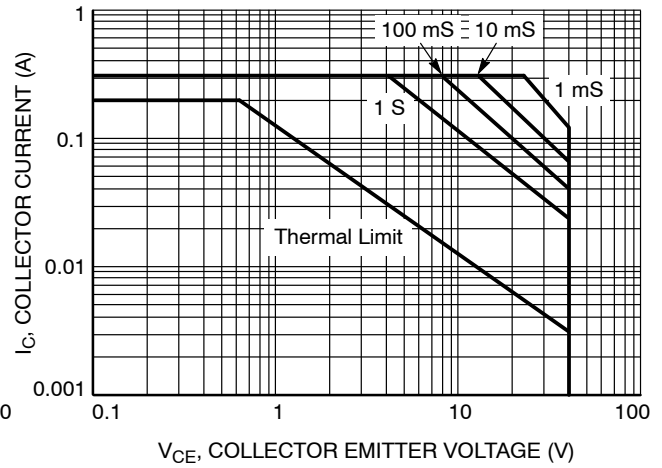


Figure 21. Safe Operating Area

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3906WT1

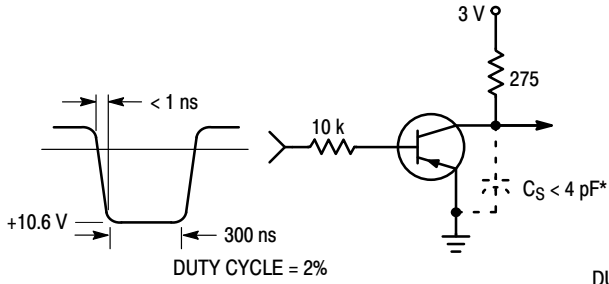


Figure 22. Delay and Rise Time Equivalent Test Circuit

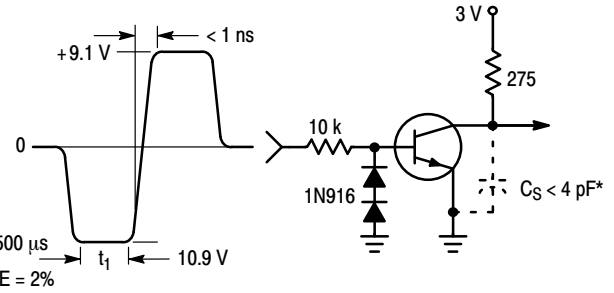


Figure 23. Storage and Fall Time Equivalent Test Circuit

\* Total shunt capacitance of test jig and connectors

## TYPICAL TRANSIENT CHARACTERISTICS

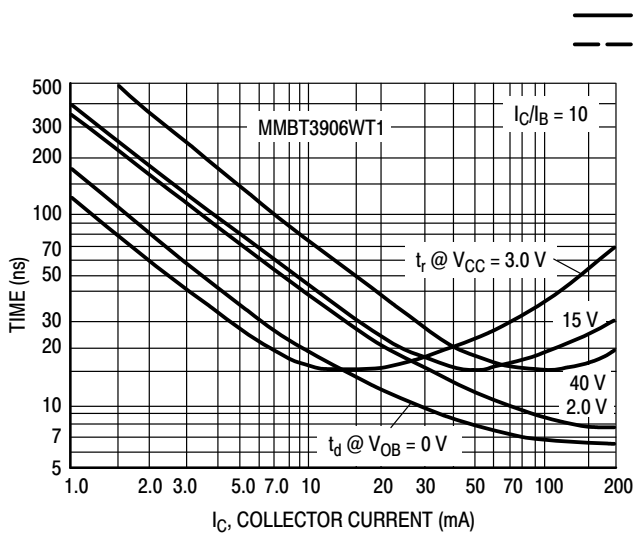


Figure 24. Turn-On Time

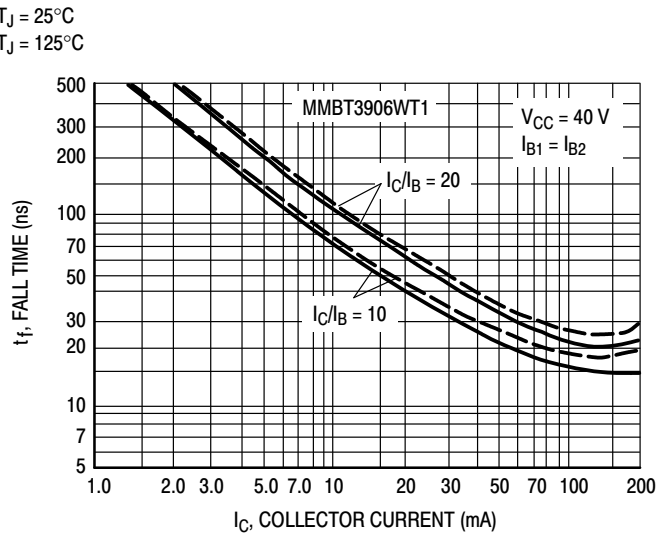


Figure 25. Fall Time

## TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

( $V_{CE} = -5.0$  Vdc,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

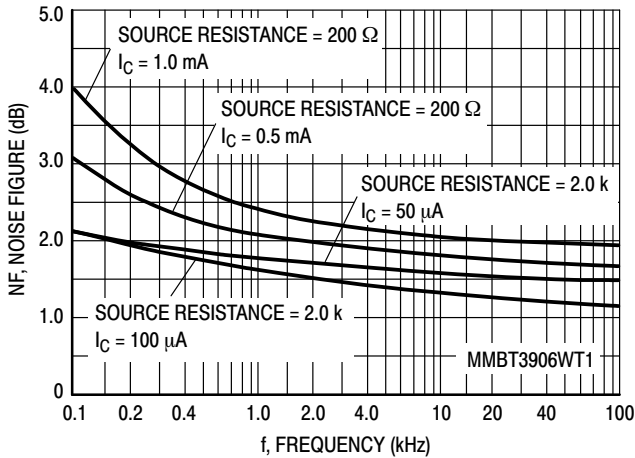


Figure 26.

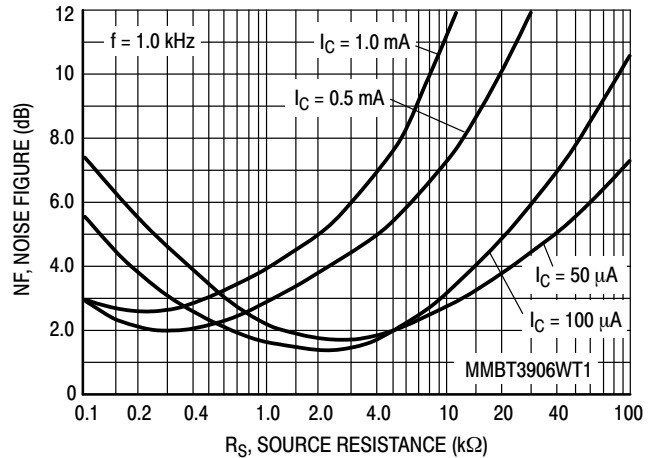


Figure 27.



# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3906WT1

### h PARAMETERS

( $V_{CE} = -10$  Vdc,  $f = 1.0$  kHz,  $T_A = 25^\circ\text{C}$ )

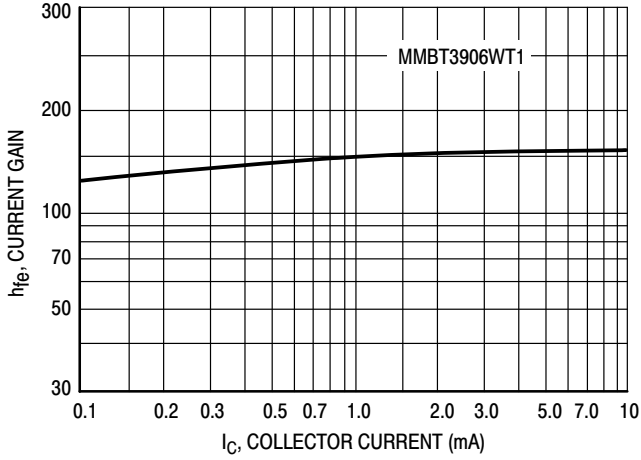


Figure 28. Current Gain

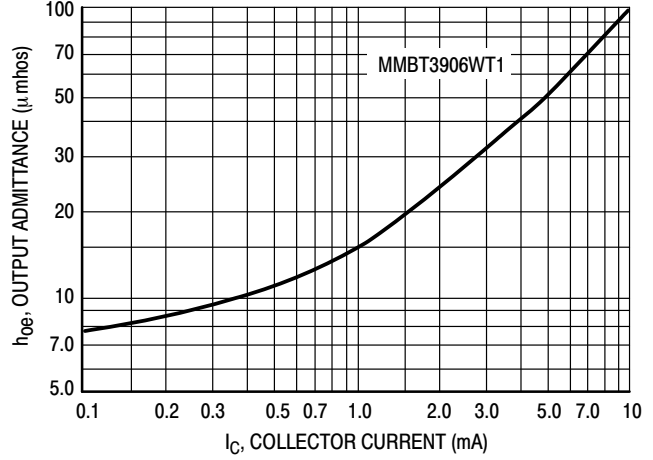


Figure 29. Output Admittance

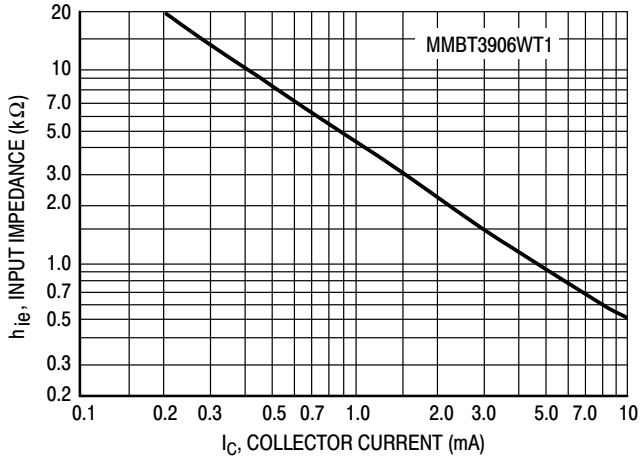


Figure 30. Input Impedance

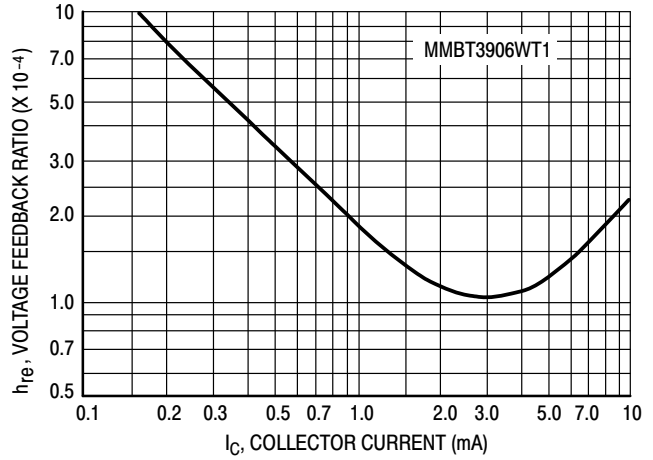


Figure 31. Voltage Feedback Ratio

### STATIC CHARACTERISTICS

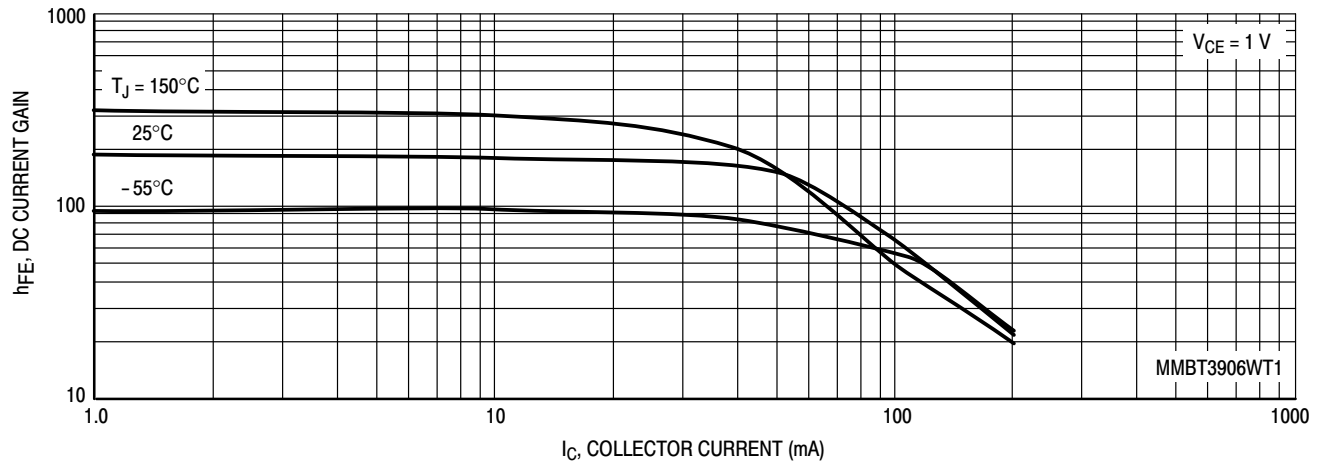


Figure 32. DC Current Gain

MMBT3904WT1, NPN MMBT3906WT1, PNP

MMBT3906WT1

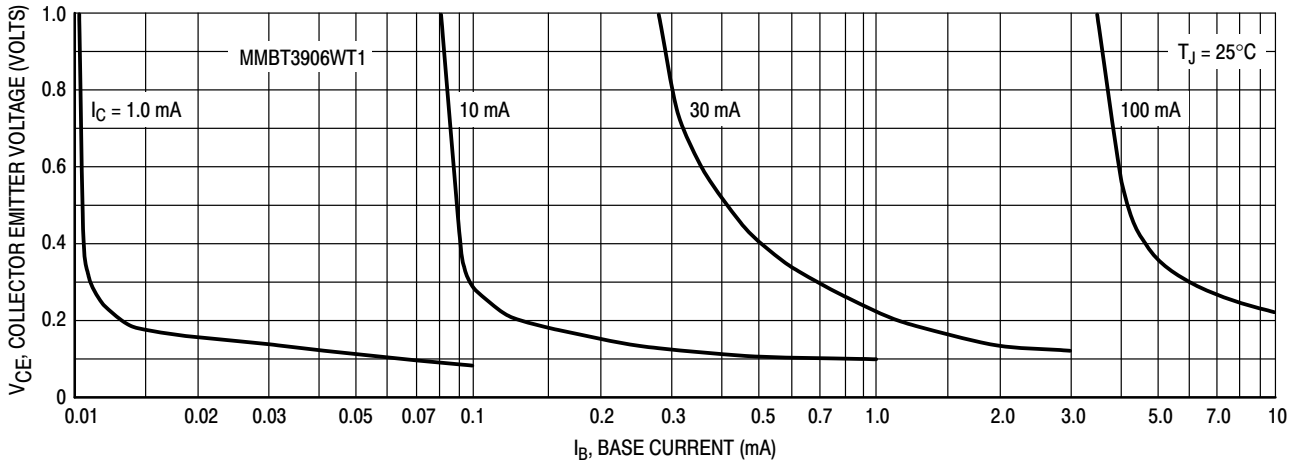


Figure 33. Collector Saturation Region

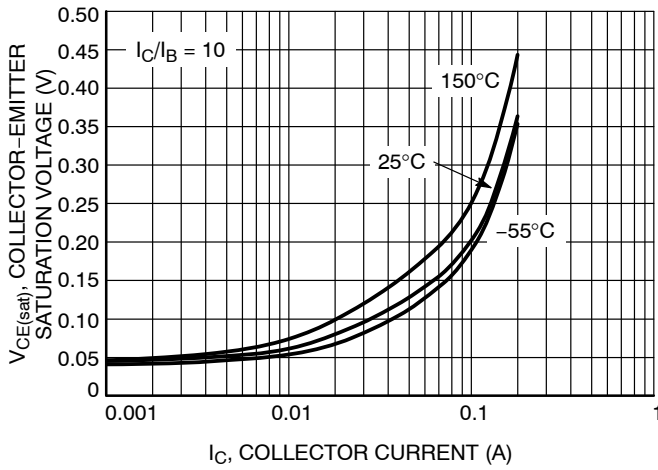


Figure 34. Collector Emitter Saturation Voltage vs. Collector Current

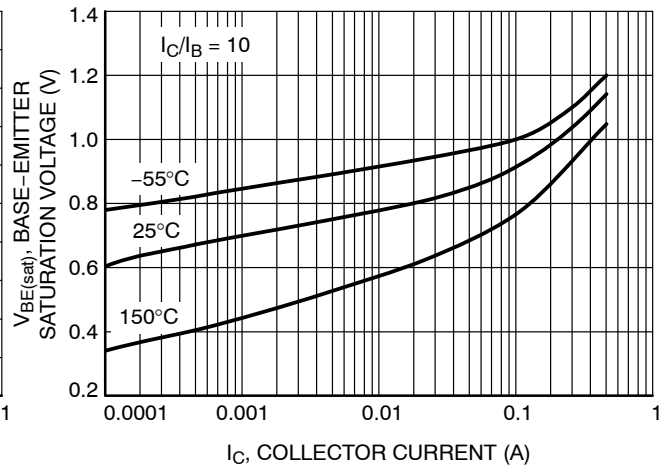


Figure 35. Base Emitter Saturation Voltage vs. Collector Current

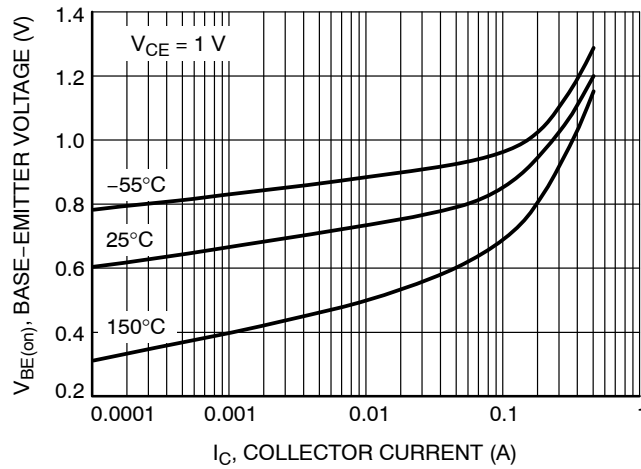


Figure 36. Base Emitter Voltage vs. Collector Current

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## MMBT3906WT1

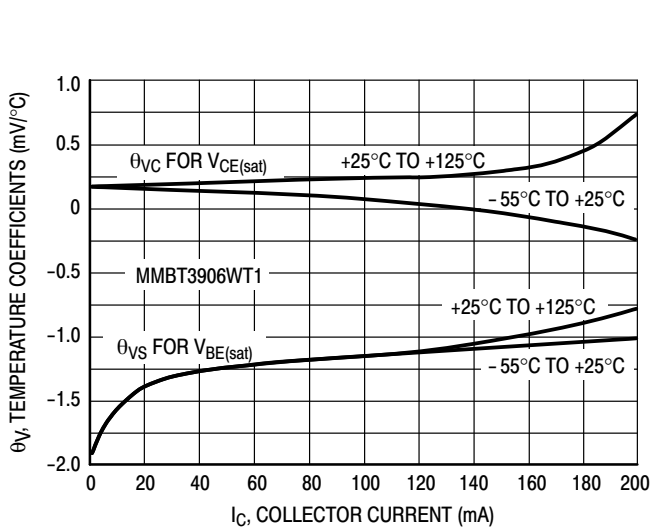


Figure 37. Temperature Coefficients

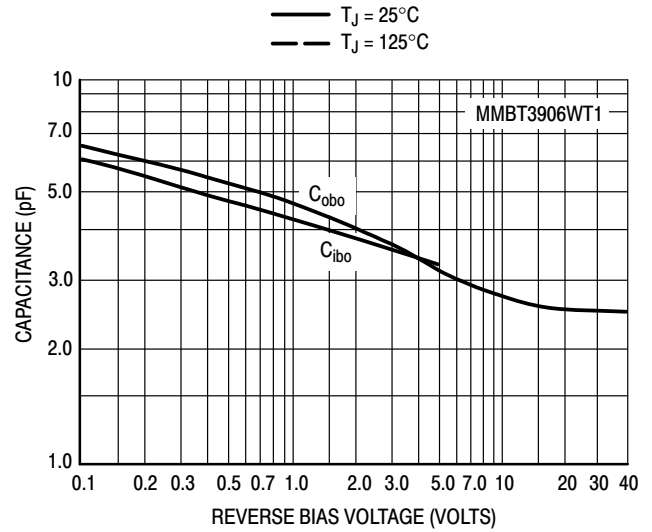


Figure 38. Capacitance

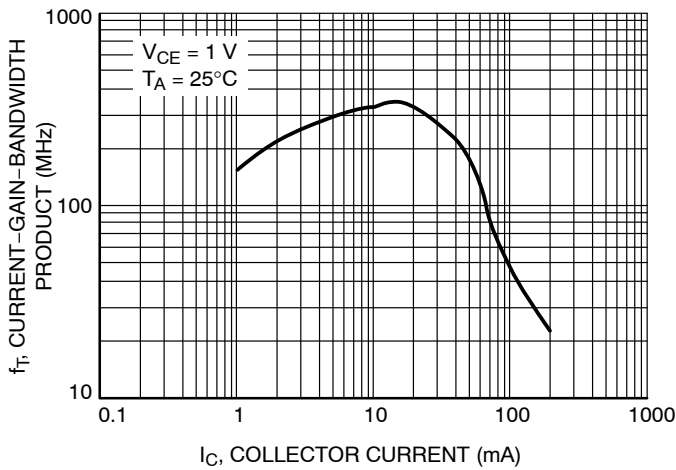


Figure 39. Current Gain Bandwidth Product vs. Collector Current


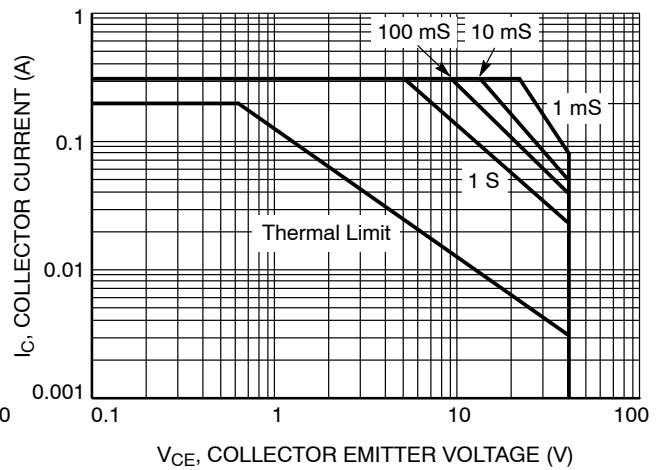


Figure 40. Safe Operating Area

# MMBT3904WT1, NPN MMBT3906WT1, PNP

## PACKAGE DIMENSIONS


SC-70 (SOT-323)  
CASE 419-04  
ISSUE N

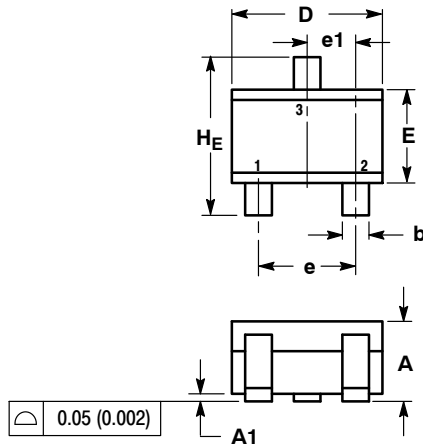

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.70 REF			0.028 REF		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.10	2.20	0.071	0.083	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BSC		
L	0.20	0.38	0.56	0.008	0.015	0.022
HE	2.00	2.10	2.40	0.079	0.083	0.095

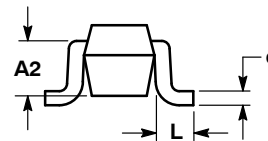

STYLE 3:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR

### SOLDERING FOOTPRINT\*

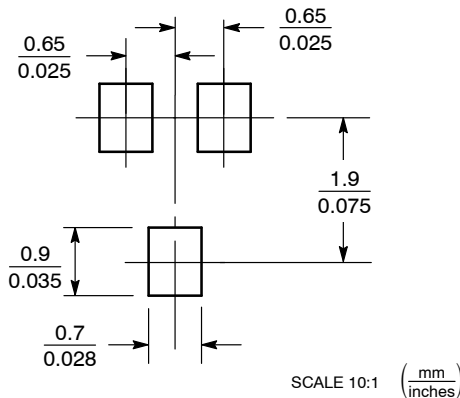

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative