

**Nokia Customer Care
2118 (RH-77)
Mobile Terminal**

Parts Lists and Exploded View

Contents	Page
Exploded View	3
Assembly Part List	3
Parts List.....	5
2118 (RH-77) – PDM Version 003	5

Exploded View

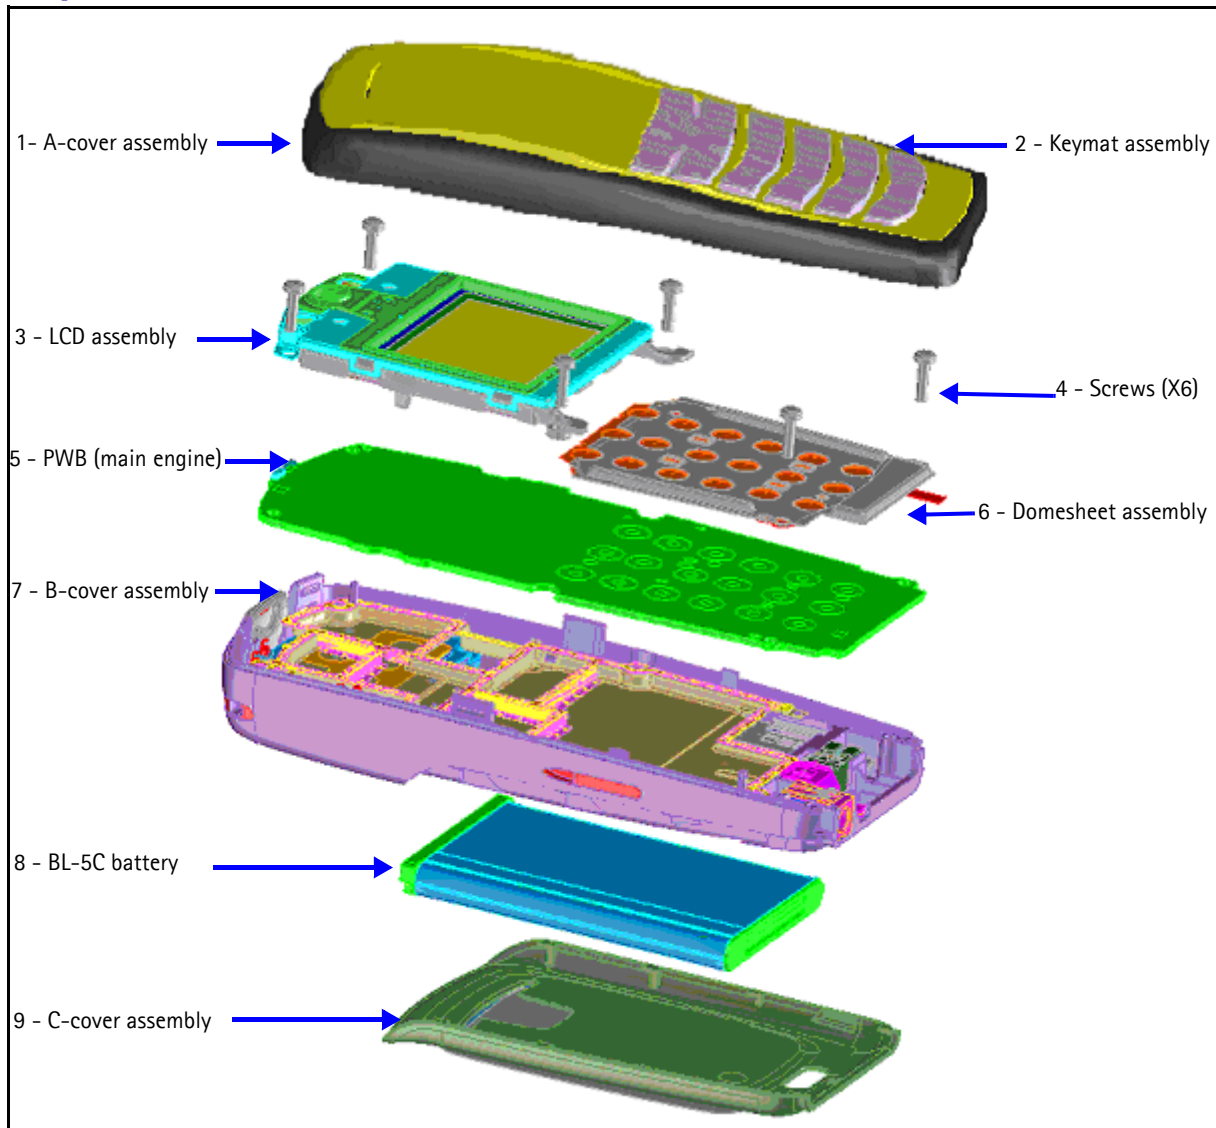


Figure 1: Exploded view

Assembly Part List

Part	Quantity	Description
1	1	A-cover assembly: Cream Deep blue Sky blue Green blue Smoke grey Teal
2	1	Keymat assembly
3	1	UI module assembly
4	6	Screws M1.8X6 DIN1654 TORX PLUS 19 MnB4

Part	Quantity	Description
5	1	PWB (main engine)
6	1	Dome sheet assembly
7	1	B-cover assembly
8	1	Battery (BL-5C)
9	1	C-cover assembly: Cream Deep blue Sky blue Green blue Smoke grey Teal
	1	Microphone
	1	DC jack
	1	Vibra
	1	Power button
	1	Antenna assembly
	1	Shield assembly
	1	SIM card reader
	1	Earpiece
	1	Speaker
	1	Type label
	1	Water ingress label

2118 (RH-77) Parts List – PDM Version 003

Note: Always refer to the most recent Service Bulletin for up-to-date parts list information.

Item	Side	X	Y	Description
B200	Bottom	M	7	CRYSTAL 32.768KHZ+-20PPM 12.5PF
C100	Bottom	F	9	CHIPCAP NP0 47P J 50V 0402
C101	Bottom	O	6	CHIPCAP X5R 1U K 6V3 0603
C102	Bottom	O	6	CHIPCAP X5R 1U K 6V3 0603
C103	Bottom	R	8	CHIPCAP NP0 22P J 50V 0402
C104	Bottom	R	8	CHIPCAP NP0 22P J 50V 0402
C105	Bottom	R	7	CHIPCAP NP0 22P J 50V 0402
C106	Top	T	7	CHIPCAP X7R 1N0 J 50V 0402
C111	Bottom	F	9	CHIPCAP X7R 10N K 50V 0603
C113	Bottom	O	7	CHIPCAP X7R 10N K 16V 0402
C115	Bottom	F	9	CHIPCAP NP0 47P J 50V 0402
C151	Bottom	O	8	CHIP ARRAY X5R 2X100N M 10V 0405
C152	Bottom	N	8	CHIPCAP NP0 39P J 50V 0402
C153	Top	T	8	CHIPCAP NP0 47P J 50V 0402
C155	Bottom	O	7	CHIPCAP X7R 22N K 16V 0402
C156	Bottom	N	8	CHIPCAP NP0 39P J 50V 0402
C164	Bottom	O	7	CHIPCAP X7R 2N2 J 50V 0402
C166	Bottom	O	7	CHIPCAP X7R 22N K 16V 0402
C167	Bottom	O	7	CHIPCAP X5R 1U K 6V3 0603
C169	Bottom	O	8	CHIPCAP X5R 100N K 10V 0402
C171	Bottom	Q	5	CHIPCAP NP0 47P J 50V 0402
C172	Bottom	O	8	CHIPCAP X5R 100N K 10V 0402
C174	Bottom	O	7	CHIPCAP X5R 100N K 10V 0402
C175	Bottom	N	7	CHIPCAP X5R 1U K 6V3 0603
C177	Bottom	O	7	CHIPCAP NP0 22P J 50V 0402
C178	Bottom	N	8	CHIPCAP NP0 39P J 50V 0402
C179	Bottom	N	8	CHIPCAP NP0 39P J 50V 0402
C180	Bottom	R	5	CHIPCAP X5R 100N K 10V 0402
C181	Top	T	8	CHIPCAP X5R 100N K 10V 0402

Item	Side	X	Y	Description
C201	Bottom	L	6	CHIPCAP X5R 1U K 6V3 0603
C202	Bottom	K	7	CHIPCAP X7R 10N K 16V 0402
C203	Bottom	N	10	CHIPCAP X5R 1U K 6V3 0603
C205	Bottom	L	6	CHIPCAP X5R 1U K 6V3 0603
C206	Bottom	M	7	CHIPCAP X5R 1U K 6V3 0603
C207	Bottom	M	10	CHIPCAP X5R 1U K 6V3 0603
C208	Bottom	K	8	CHIPCAP X5R 100N K 10V 0402
C209	Bottom	M	7	CHIPCAP NP0 22P J 50V 0402
C210	Bottom	N	7	CHIPCAP NP0 22P J 50V 0402
C212	Bottom	M	6	CHIPCAP X5R 1U K 6V3 0603
C213	Bottom	M	6	CHIPCAP X5R 1U K 6V3 0603
C214	Bottom	N	7	CHIPCAP X5R 1U K 6V3 0603
C218	Bottom	L	10	CHIPCAP X5R 100N K 10V 0402
C219	Bottom	K	7	CHIPCAP X5R 1U K 6V3 0603
C220	Bottom	M	10	CHIPCAP X7R 10N K 16V 0402
C221	Bottom	K	7	CHIPCAP X5R 1U K 6V3 0603
C222	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603
C223	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603
C224	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603
C225	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603
C226	Bottom	K	9	CHIPCAP X5R 1U K 6V3 0603
C227	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603
C228	Bottom	K	9	CHIPCAP X5R 1U K 6V3 0603
C229	Bottom	K	9	CHIPCAP X5R 1U K 6V3 0603
C230	Bottom	K	8	CHIPCAP X5R 100N K 10V 0402
C2302	Bottom	R	6	CHIPCAP X5R 100N K 10V 0402
C2304	Bottom	Q	6	CHIPCAP X5R 4U7 K 6.3V 0603
C2305	Bottom	Q	6	CHIPCAP X5R 4U7 K 6.3V 0603
C2306	Bottom	Q	5	CHIPCAP X5R 4U7 K 6.3V 0603
C2307	Bottom	Q	5	CHIPCAP X5R 4U7 K 6.3V 0603
C231	Bottom	K	9	CHIPCAP X5R 1U K 6V3 0603
C232	Bottom	K	8	CHIPCAP X5R 1U K 6V3 0603

Item	Side	X	Y	Description
C233	Bottom	K	7	CHIPCAP X5R 1U K 6V3 0603
C234	Bottom	K	9	CHIPCAP X5R 1U K 6V3 0603
C235	Bottom	N	6	CHIPCAP X5R 1U K 6V3 0603
C236	Bottom	K	9	CHIPCAP X5R 100N K 10V 0402
C237	Bottom	K	9	CHIPCAP X5R 100N K 10V 0402
C238	Bottom	L	7	CHIPCAP X5R 100N M 16V 0402
C239	Bottom	L	10	CHIPCAP X5R 100N K 10V 0402
C241	Bottom	L	10	CHIPCAP X7R 10N K 16V 0402
C243	Bottom	N	9	CHIPCAP X5R 1U K 6V3 0603
C260	Bottom	K	7	CHIPCAP X5R 10U M 6V3 0805
C300	Top	B	7	CHIPCAP X5R 100N K 10V 0402
C301	Top	C	7	CHIPCAP X5R 100N K 10V 0402
C303	Bottom	O	8	CHIPCAP X5R 100N K 10V 0402
C304	Bottom	N	10	CHIPCAP X5R 1U0 M 25V 1206
C306	Top	A	7	CHIPCAP NP0 47P J 50V 0402
C309	Top	C	7	CHIPCAP NP0 47P J 50V 0402
C316	Bottom	O	9	CHIPCAP X5R 1U K 6V3 0603
C390	Bottom	R	9	CHIPCAP X5R 100N K 10V 0402
C400	Bottom	M	3	CHIPCAP X5R 100N K 10V 0402
C401	Bottom	K	6	CHIPCAP X5R 100N K 10V 0402
C402	Bottom	M	6	CHIPCAP X5R 100N K 10V 0402
C403	Bottom	K	5	CHIPCAP X5R 100N K 10V 0402
C404	Bottom	N	3	CHIPCAP X5R 100N K 10V 0402
C405	Bottom	K	5	CHIPCAP X5R 100N K 10V 0402
C422	Bottom	M	6	CHIPCAP X7R 10N K 16V 0402
C426	Bottom	L	6	CHIPCAP X7R 10N K 16V 0402
C428	Bottom	K	4	CHIPCAP X7R 10N K 16V 0402
C450	Bottom	O	6	CHIPCAP X7R 10N K 16V 0402
C451	Bottom	P	5	CHIPCAP X5R 100N K 10V 0402
C454	Bottom	O	6	CHIPCAP X7R 10N K 16V 0402
C505	Bottom	I	5	CHIPCAP X5R 4U7 K 10V 0805
C506	Bottom	I	5	CHIPCAP NP0 33P J 50V 0402

Item	Side	X	Y	Description	
C510	Bottom	J	3	CHIPCAP X7R 1N0 J 50V	0402
C511	Bottom	H	4	CHIPCAP X7R 1N0 J 50V	0402
C516	Bottom	H	4	CHIPCAP X7R 1N5 J 50V	0402
C519	Bottom	H	4	CHIPCAP X7R 4N7 J 25V	0402
C520	Bottom	H	5	CHIPCAP PPS 39N G 16V	1206
C521	Bottom	J	4	CHIPCAP X5R 100N K 10V	0402
C522	Bottom	J	4	CHIPCAP X7R 1N0 J 50V	0402
C600	Bottom	G	6	CHIPCAP X7R 1N0 J 50V	0402
C601	Bottom	F	7	CHIPCAP X7R 3N3 J 50V	0402
C603	Bottom	G	7	CHIPCAP NP0 18P J 50V	0402
C605	Bottom	G	6	CHIPCAP X7R 1N0 J 50V	0402
C606	Bottom	F	7	CHIPCAP X7R 1N0 J 50V	0402
C611	Bottom	E	5	CHIPCAP X7R 1N0 J 50V	0402
C612	Bottom	E	6	CHIPCAP X7R 1N0 J 50V	0402
C614	Bottom	F	5	CHIPCAP NP0 2P2 C 50V	0402
C617	Bottom	G	5	CHIPCAP NP0 12P J 50V	0402
C618	Bottom	G	5	CHIPCAP NP0 12P J 50V	0402
C619	Bottom	F	5	CHIPCAP NP0 1P5 C 50V	0402
C623	Bottom	F	5	CHIPCAP NP0 2P2 C 50V	0402
C624	Bottom	E	6	CHIPCAP NP0 39P J 50V	0402
C630	Bottom	E	7	CHIPCAP NP0 22P J 50V	0402
C633	Bottom	G	6	CHIPCAP X7R 1N0 J 50V	0402
C635	Bottom	G	6	CHIPCAP X7R 1N0 J 50V	0402
C636	Bottom	F	5	CHIPCAP X5R 100N K 10V	0402
C638	Bottom	G	5	CHIPCAP X7R 1N0 J 50V	0402
C641	Bottom	F	7	CHIPCAP NP0 0P5 C 50V	0402
C643	Bottom	F	7	CHIPCAP X7R 1N0 J 50V	0402
C644	Bottom	G	6	CHIPCAP NP0 100P J 50V	0402
C646	Bottom	G	4	CHIPCAP X7R 2N2 J 50V	0402
C647	Bottom	F	5	CHIPCAP X7R 2N2 J 50V	0402
C648	Bottom	G	5	CHIPCAP X5R 27N K 10V	0402
C650	Bottom	H	5	CHIPCAP X7R 10N K 16V	0402

Item	Side	X	Y	Description
C651	Bottom	H	6	CHIPCAP X5R 100N K 10V 0402
C652	Bottom	G	5	CHIPCAP X7R 10N K 16V 0402
C654	Bottom	G	5	CHIPCAP X5R 100N K 10V 0402
C655	Bottom	E	5	CHIPCAP X5R 4U7 K 10V 0805
C656	Bottom	F	5	CHIPCAP NP0 47P J 50V 0402
C658	Bottom	G	6	CHIPCAP X7R 1N0 J 50V 0402
C659	Bottom	G	7	CHIPCAP NP0 100P J 50V 0402
C663	Bottom	E	6	CHIPCAP X5R 1U K 6V3 0603
C702	Bottom	J	8	CHIPCAP NP0 3P9 C 50V 0402
C703	Bottom	I	8	CHIPCAP X7R 10N K 16V 0402
C704	Bottom	I	9	CHIPCAP X7R 10N K 16V 0402
C706	Bottom	J	10	CHIPCAP X7R 1N0 J 50V 0402
C707	Bottom	J	8	CHIPCAP NP0 3P9 C 50V 0402
C710	Bottom	H	9	CHIPCAP X5R 100N K 10V 0402
C711	Bottom	H	9	CHIPCAP NP0 12P J 50V 0402
C712	Bottom	J	9	CHIPCAP X7R 1N0 J 50V 0402
C713	Bottom	J	10	CHIPCAP X7R 10N J 16V 0402
C720	Bottom	J	9	CHIPCAP X5R 100N K 10V 0402
C725	Bottom	I	8	CHIPCAP X5R 100N K 10V 0402
C728	Bottom	I	9	CHIPCAP X7R 4N7 K 25V 0402
C730	Bottom	I	9	CHIPCAP X5R 100N K 10V 0402
C731	Bottom	I	8	CHIPCAP X5R 100N K 10V 0402
C734	Bottom	H	9	CHIPCAP X5R 100N K 10V 0402
C735	Bottom	H	8	CHIPCAP X7R 1N0 J 50V 0402
C736	Bottom	H	8	CHIPCAP X7R 1N0 J 50V 0402
C742	Bottom	I	8	CHIPCAP X5R 100N K 10V 0402
C744	Bottom	J	9	CHIPCAP X7R 10N J 16V 0402
C754	Bottom	I	9	CHIPCAP NP0 10P J 50V 0402
C756	Bottom	I	9	CHIPCAP X7R 15N K 16V 0402
C757	Bottom	H	10	CHIPCAP X5R 100N K 10V 0402
C802	Bottom	E	9	CHIPCAP NP0 150P J 50V 0402
C803	Bottom	E	5	CHIPCAP X5R 100N K 10V 0402

Item	Side	X	Y	Description
C805	Bottom	C	9	CHIPCAP X5R 10U M 6V3 0805
C806	Bottom	E	10	CHIPCAP X5R 10U K 10V 1206
C807	Bottom	E	5	CHIPCAP X7R 33N K 10V 0402
C808	Bottom	E	9	CHIPCAP X5R 10U K 10V 1206
C810	Bottom	D	9	CHIPCAP X7R 10N K 16V 0402
C811	Bottom	D	9	CHIPCAP NP0 1P0 C 50V 0402
C813	Bottom	E	8	CHIPCAP X7R 470P J 50V 0402
C814	Bottom	D	8	CHIPCAP X7R 1N0 J 50V 0402
C816	Bottom	E	8	CHIPCAP X7R 10N K 16V 0402
C901	Bottom	D	5	CHIPCAP NP0 56P J 50V 0402
C903	Bottom	D	7	CHIPCAP NP0 1P8 C 50V 0402
C906	Bottom	D	6	CHIPCAP NP0 100P J 50V 0402
C907	Bottom	D	6	CHIPCAP NP0 3P3 C 50V 0402
C909	Bottom	C	7	CHIPCAP NP0 100P J 50V 0402
C912	Bottom	C	5	CHIPCAP NP0 8P2 C 50V 0402
C913	Bottom	C	5	CHIPCAP X7R 3N3 J 50V 0402
C914	Bottom	C	5	CHIPCAP X5R 100N K 10V 0402
C917	Bottom	C	6	CHIPCAP NP0 27P J 50V 0402
C918	Bottom	D	7	CHIPCAP X7R 47N K 10V 0402
C919	Bottom	C	5	CHIPCAP X7R 1N0 J 50V 0402
D200	Bottom	M	8	UEMC 4.4 LF W/DOG ENA VCORE1V5
D301	Bottom	O	8	DIX2 BAV70W CC 70V .5A 4NS SOT323
D305	Top	A	7	LED CL430S-WF WHITE >500MCD?20MA
D400	Bottom	M	5	UPP8M v4.2/v4.3/4.31 C027 12x12 UBGA144
D401	Bottom	O	5	FLASH 4MX16 1V8/1V8 VFBGA44 PBFREE
F001	Top	T	5	SM FUSE F 2.0A 32V 0603
G501	Bottom	I	4	VCO 1051-1082MHZ 2.78V 10MA CDMA
G502	Bottom	J	4	VCTCXO 19.2MHZ 2.78V
L100	Top	T	6	FERRITE BEAD 0.015R 42R/100M 0805
L102	Top	T	8	CHIP BEAD ARRAY 2X1000R 0405
L103	Top	T	9	CHIP BEAD ARRAY 2X1000R 0405
L106	Top	T	7	FERRITE BEAD 600R 300MA 0.6R 0402

Item	Side	X	Y	Description
L107	Top	T	7	FERRITE BEAD 600R 300MA 0.6R 0402
L150	Bottom	E	3	FERR.BEAD 240R/100M 0.4A 0R3 0402
L151	Bottom	E	3	FERR.BEAD 240R/100M 0.4A 0R3 0402
L2300	Bottom	Q	6	FERR.BEAD 0R03 42R/100MHZ 3A 0805
L2301	Bottom	P	6	CHOKE 10UH M 0.49A 3.0X2.8X1.2MM
L300	Bottom	N	9	CHOKE 22U M 1R4 0.33A 3.3X3.3X1.5
L301	Bottom	O	9	FERR.BEAD 0R03 42R/100MHZ 3A 0805
L501	Bottom	J	5	DIR.COUPLER 1066+/-14MHZ 3.2X1.6
L600	Bottom	G	7	CHIP COIL 12N G Q35/250MHZ 0603
L601	Bottom	G	7	CHIP COIL 12N G Q35/250MHZ 0603
L606	Bottom	F	5	CHIP COIL 3N3 +-0N3 Q6/100M 0402
L607	Bottom	F	7	CHIP COIL 5N6 +-0N3 Q28/800M 0402
L608	Bottom	F	7	CHIP COIL 5N6 +-0N3 Q28/800M 0402
L609	Bottom	F	7	CHIP COIL 5N6 +-0N3 Q28/800M 0402
L612	Bottom	F	5	CHIP COIL 2N7 +-0N3 Q29/800M 0402
L615	Bottom	G	5	CHIP COIL 12N J Q7/100MHZ 0402
L616	Bottom	G	5	CHIP COIL 12N J Q7/100MHZ 0402
L701	Bottom	J	8	CHIP COIL 56N J Q12/100MHZ 0603
L702	Bottom	I	6	CHIP COIL 82N J Q17/300MHZ 0402
L708	Bottom	J	9	CHIP COIL 22N J Q40/250MHZ 0603
L800	Bottom	D	10	CHIP COIL 2U7 K Q21/1MHZ 3.0X3.4
L802	Top	B	5	CHIP COIL 68N J Q17/300MHZ 0402
L804	Top	B	5	CHIP COIL 68N J Q17/300MHZ 0402
L805	Top	C	4	CHIP COIL 68N J Q17/300MHZ 0402
L806	Bottom	D	9	CHIP COIL 33N J Q7/100MHZ 0402
L901	Bottom	C	7	CHIP COIL 12N J Q7/100MHZ 0402
L903	Bottom	D	6	CHIP COIL 100N J Q12/100MHZ 0603
L906	Bottom	C	7	CHIP COIL 19N J Q25/250MHZ 0402
L907	Bottom	D	6	CHIP COIL 15N J Q7/100MHZ 0402
L908	Bottom	C	6	CHIP COIL 15N J Q7/100MHZ 0402
L909	Bottom	C	5	CHIP COIL 150N J Q14/100MHZ 0603
L910	Bottom	D	5	CHIP COIL 68NH J Q12/100MHZ 0603

Item	Side	X	Y	Description
N150	Bottom	O	7	AF AMP 0.4W LM4890/NCP2890 PBFREE
N2301	Bottom	Q	6	DC/DC CONV LM3661-1.35V/1.05V
N2302	Bottom	C	6	LNA/MIXER/DOWNCNTR ALFRED VQFN-24
N2303	Bottom	O	6	VREG LP3985ITLX-2.8 NOPB USMD5
N2304	Bottom	C	9	ASIP STPAC01F2 CDMA PWR DET BGA-8
N302	Bottom	O	9	DC/DC CONV TK65600 USMD8
N601	Bottom	F	6	JEDI TX RFIC CX74050 7X7 LGA
N700	Bottom	I	9	Yoda Dig-V1 MD I.F IC 5x5LGA
N800	Bottom	D	9	VREG CX20504 4.0X4.0X1.0MM
N803	Bottom	E	8	PW AMP CX77145 CDMA800 ORCA
N804	Bottom	E	7	TRX2+4X10K PUMD3 N&P 50V SOT363
Q301	Top	B	5	TR DTC143ZE N RBE4K7/47K OA1 SC75
Q302	Top	T	5	TR DTC143ZE N RBE4K7/47K OA1 SC75
R100	Bottom	R	7	RES NETWORK 0W06 2X47R J 0404
R101	Bottom	R	8	RES NETWORK 0W06 2X47R J 0404
R102	Bottom	R	8	RES NETWORK 0W06 2X47R J 0404
R104	Bottom	R	7	CHIPRES 0W06 220K J 0402
R105	Top	T	9	VARISTOR ARRAY 2XVWM16V VC50 0405
R106	Bottom	N	7	NTC RES 0W1 47K J B 4050+-3% 0402
R107	Bottom	O	6	CHIPRES 0W06 100K J 0402
R109	Bottom	R	8	CHIPRES 0W06 100K J 0402
R110	Top	T	9	VARISTOR ARRAY 2XVWM16V VC50 0405
R150	Top	T	8	RES NETWORK 0W06 2X1K0 J 0404
R151	Bottom	O	8	RES NETWORK 0W06 2X1K0 J 0404
R152	Top	T	8	RES NETWORK 0W06 2X1K0 J 0404
R154	Bottom	N	7	CHIPRES 0W06 470R J 0402
R155	Bottom	O	8	CHIPRES 0W06 47K J 0402
R156	Bottom	O	7	CHIPRES 0W06 180K F 200PPM 0402
R157	Bottom	O	7	CHIPRES 0W06 5K6 J 0402
R168	Bottom	N	8	RES NETWORK 0W06 2X5R6 J 0404
R170	Bottom	R	5	RES NETWORK 0W06 2X1K0 J 0404
R171	Bottom	Q	5	RES NETWORK 0W06 2X1K0 J 0404

Item	Side	X	Y	Description
R172	Bottom	O	8	RES NETWORK 0W06 2X1K0 J 0404
R173	Bottom	O	8	CHIPRES 0W06 47K J 0402
R178	Bottom	B	6	RES NETWORK 0W06 2X5R6 J 0404
R179	Bottom	A	6	VARISTOR ARRAY 2XVWM16V VC50 0405
R200	Bottom	L	7	CHIPRES 0W25 0R22 J 0805
R202	Bottom	M	10	RES NETWORK 0W03 4X100K J 0804
R206	Bottom	M	10	RES NETWORK 0W06 2X4K7 J 0404
R2303	Bottom	P	6	CHIPRES JUMPER 0R0 0402
R2304	Bottom	R	7	ASIP 4XESD *** PB-FREE *** BGA5
R2307	Bottom	R	8	ASIP SIM INTERFACE ** PB-FREE **
R2310	Bottom	P	4	CHIPRES 0W06 150R J 0603
R300	Bottom	O	9	CHIPRES 0W06 1K3 F 250PPM 0402
R302	Bottom	O	9	CHIPRES 0W06 22K F 200PPM 0402
R303	Bottom	P	4	CHIPRES 0W06 68R J 0402
R304	Bottom	P	4	CHIPRES 0W06 150R J 0603
R306	Bottom	B	7	CHIPRES 0W06 4K7 J 0402
R308	Bottom	F	8	CHIPRES 0W06 68R J 0402
R309	Bottom	F	8	CHIPRES 0W06 220R J 0402
R310	Bottom	F	8	CHIPRES 0W06 220R J 0402
R315	Bottom	P	4	CHIPRES 0W06 33R J 0402
R316	Bottom	P	4	CHIPRES 0W06 68R J 0402
R321	Bottom	Q	4	CHIPRES 0W06 3K3 J 0402
R322	Bottom	B	6	CHIP VARISTOR VWM14V VC50V 0402
R427	Bottom	M	6	CHIPRES 0W06 3K3 J 0402
R433	Bottom	L	6	CHIPRES 0W06 3K3 J 0402
R435	Bottom	K	4	CHIPRES 0W06 3K3 J 0402
R450	Bottom	N	6	CHIPRES 0W06 4K7 J 0402
R502	Bottom	H	5	CHIPRES 0W06 10R J 0402
R504	Bottom	K	5	CHIPRES 0W06 47R J 0402
R508	Bottom	H	4	CHIPRES 0W06 4K7 J 0402
R509	Bottom	H	4	CHIPRES 0W06 4K7 J 0402
R512	Bottom	H	4	CHIPRES 0W06 5K6 J 0402

Item	Side	X	Y	Description
R516	Bottom	J	5	CHIPRES 0W06 10R J 0402
R517	Bottom	J	5	CHIPRES 0W06 10K J 0402
R602	Bottom	H	6	CHIPRES 0W06 100R J 0402
R603	Bottom	M	7	CHIPRES 0W06 100R J 0402
R605	Bottom	L	6	CHIPRES 0W06 100R J 0402
R606	Bottom	G	5	CHIPRES 0W06 5R6 J 0402
R607	Bottom	G	6	CHIPRES 0W06 4R3 J 0402
R608	Bottom	E	5	CHIPRES 0W06 4R3 J 0402
R609	Bottom	G	5	CHIPRES 0W06 5R6 J 0402
R614	Bottom	G	5	CHIPRES 0W06 10R J 0402
R616	Bottom	F	7	CHIPRES 0W06 1K5 J 0402
R617	Bottom	G	6	CHIPRES 0W06 4R3 J 0402
R618	Bottom	H	7	CHIPRES 0W06 10R J 0402
R620	Bottom	G	6	CHIPRES 0W06 10R J 0402
R624	Bottom	G	4	CHIPRES 0W06 2K2 J 0402
R626	Bottom	G	5	CHIPRES 0W06 5K6 J 0402
R629	Bottom	G	6	CHIPRES 0W06 5R6 J 0402
R630	Bottom	G	4	CHIPRES 0W06 5K6 J 0402
R631	Bottom	G	4	CHIPRES 0W06 5K6 J 0402
R632	Bottom	E	7	CHIPRES 0W06 2R2 J 0402
R633	Bottom	E	5	CHIPRES 0W06 4R3 J 0402
R701	Bottom	J	9	CHIPRES 0W06 10R J 0402
R702	Bottom	H	8	CHIPRES 0W06 1K0 J 0402
R703	Bottom	I	10	CHIPRES 0W06 10R J 0402
R706	Bottom	I	8	CHIPRES 0W06 120K J 0402
R715	Bottom	J	10	CHIPRES 0W06 10R J 0402
R718	Bottom	I	10	CHIPRES 0W06 5K6 J 0402
R720	Bottom	I	10	CHIPRES 0W06 3K3 J 0402
R814	Bottom	D	9	CHIPRES 0W06 2K7 J 0402
R821	Bottom	D	9	NTC RES 0W1 47K J B 4050+-3% 0402
R902	Bottom	C	7	CHIPRES 0W06 47K J 0402
R905	Bottom	C	5	CHIPRES 0W06 82R J 0402

Item	Side	X	Y	Description
R910	Bottom	D	6	CHIPRES 0W06 5R6 J 0402
R911	Bottom	C	5	CHIPRES 0W06 18R J 0402
R912	Bottom	D	5	CHIPRES 0W06 270R J 0402
R913	Bottom	C	5	CHIPRES 0W06 270R J 0402
R914	Bottom	C	5	CHIPRES JUMPER 0R0 0402
S302	Bottom	A	7	SM TACT SW SIDE TRAVEL 0.2 MM
V100	Top	T	6	TVS DI 1PMT16AT3 16V 175W PWRMITE
V309	Top	Q	6	LED LWL88S **** NO NEW DESIGN ****
V312	Top	Q	8	LED LWL88S **** NO NEW DESIGN ****
V313	Top	N	6	LED LWL88S **** NO NEW DESIGN ****
V314	Top	N	8	LED LWL88S **** NO NEW DESIGN ****
V317	Bottom	Q	4	TRX2 UMT1/PUMT1 P40V100MA SOT363
V318	Bottom	Q	4	TRX2 UMT1/PUMT1 P40V100MA SOT363
V319	Bottom	Q	4	TRX2 UMT1/PUMT1 P40V100MA SOT363
V601	Bottom	G	4	CAP DIX2 BBY57-05W 4P7/17P SOT323
V701	Bottom	I	10	CAP.DI BBY57-02W 1/4 16/4P SOD523
X101	Bottom	T	7	SM SYSTEM CONNECTOR 14POL
X103	Bottom	G	9	SM BATTERY CONN 3POL SPR 12V 2A
X302	Top	B	8	SM CONN 2X5F P0.5 PWB/PWB
X387	Bottom	Q	8	SM SIM CONNECTOR 6POL P2.54
X801	Top	B	5	SM COAX CONN+SW F 50R 250V 6GHZ
Z300	Bottom	K	6	ASIP KEYBOARD INTERFACE *PB-FREE*
Z601	Bottom	E	6	SAW FILT 836.5+-12.5MHZ/3DB 2.5X2
Z701	Bottom	I	7	SAW FILT 183.6+-0.63MHZ 7X5X1.3
Z802	Bottom	D	8	ISOLATOR 824-849MHZ .65DB 5X5X2
Z803	Bottom	B	8	DUPL 824-849/869-894MHZ 5X5X1.8
Z901	Bottom	D	6	SAW FILT 881.5+-12.5MHZ/2.5 2X2.5

This page intentionally left blank.