


Mounting Brackets  
**WV-7010A & 7015**

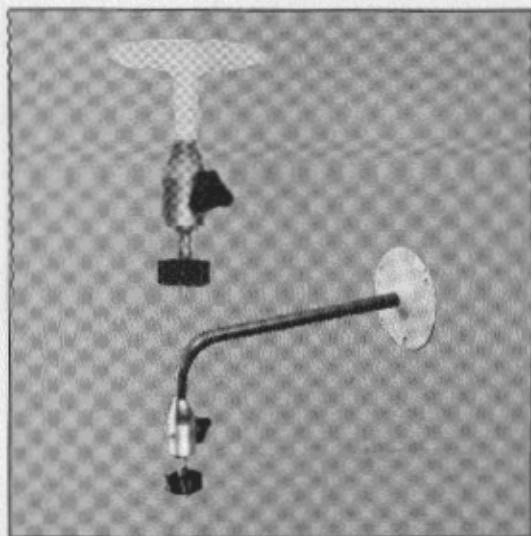

**Panasonic**

Before attempting to mount this product, please read these instructions.

# Installation Instructions

## Panasonic Industrial Company

Division of Matsushita Electric Corporation of America

CLOSED CIRCUIT VIDEO EQUIPMENT DIVISION

Executive Office: Two Panasonic Way, Secaucus, New Jersey 07094

**Regional Offices**

Northeast Region: 50 Meadowland Parkway, Secaucus, NJ 07094 (201) 348-7330  
 Southeast Region: 854 Shackleton Court, Suite 115, Norcross, GA 30092 (404) 925-8805  
 Midwest Region: 429 E. Algonquin Road, Arlington Heights, IL 60005 (312) 961-4826  
 Southwest Region: 825 Walnut Hill Lane, Irving, TX 75062 (214) 630-0516  
 Western Region: 8650 Kalafatis Ave., Cypress, CA 90630 (714) 836-1266

**PANASONIC HAWAII, INC.**

91-238 Kaula Street, Ewa Beach, P.O. Box 774 Honolulu, Hawaii 96805 (813) 982-2851

**MATSUSHITA ELECTRIC OF CANADA, LIMITED**


1270 Avenue Drive, Mississauga, Ontario, Canada L4W 2T3 (416) 624-5810

**PANASONIC SALES COMPANY**

DIVISION OF MATSUSHITA ELECTRIC OF PUERTO RICO, INC.

Ave. 55 de Villaverde, Km. 9.7, Victoria Industrial Park, Carolina, Puerto Rico 00983 (809) 750-4100

■ **ASSEMBLING**

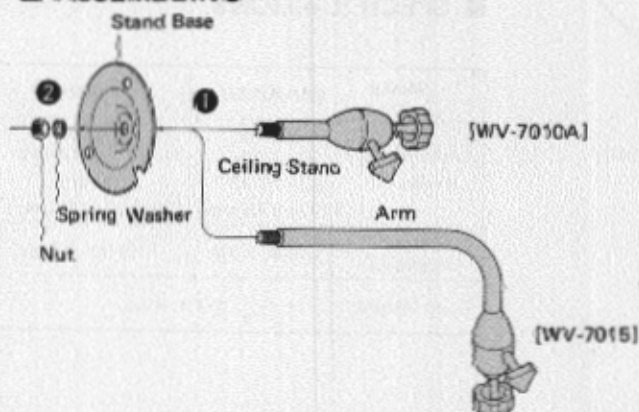

- 1 Insert the Ceiling Stand or Arm into the Stand Base.
- 2 Rock them with Spring Washer and Nut tightly.


PANASONIC INDUSTRIAL COMPANY, PH1 or PSC will repair and exchange parts for this product free of charge in the U.S.A. and Puerto Rico in the event of a manufacturing defect. New or comparable rebuilt parts in exchange for defective parts for one (1) year after original purchase.

## ■ INSTALLATION PRECAUTIONS:


- The mounting brackets model WV-7010A and WV-7015 were designed for indoor use and can support any CCTV camera. For example, Panasonic CCTV camera models WV-140/144/1410/1414/1460/1464/1500/1504/1550/1554, even when installed in the Panasonic camera-housing model WV-7120.
- Combined weight of any CCTV camera, lens and housing must not exceed 9 lbs. (4 kg).
- Select the location where the camera weight can be properly supported and firmly attach the bracket to plywood, gypsum board or plaster board. Do not mount a camerahousing and camera on these brackets that exceed 9lbs. (4 kg) in combined weight.

## ■ INSTALLATION

- 1 Make holes according to the actual size pattern and mount the bracket.
  1. Plot the points (A, B, C) for making holes.
  2. Make three preliminary holes.
  3. Fix the bracket with three screws (not provided).
- 2 Mount the camera with Camera Mounting Screw ①.
- 3 Adjust the camera direction with Pan/Tilt Adjusting Screw ②.

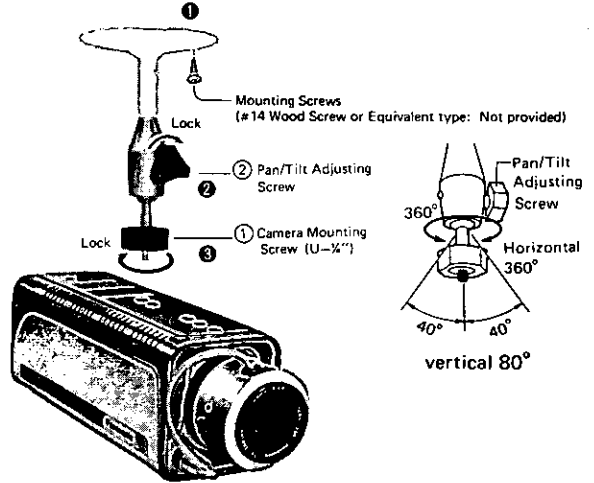

↑ Up side (WV-7015)

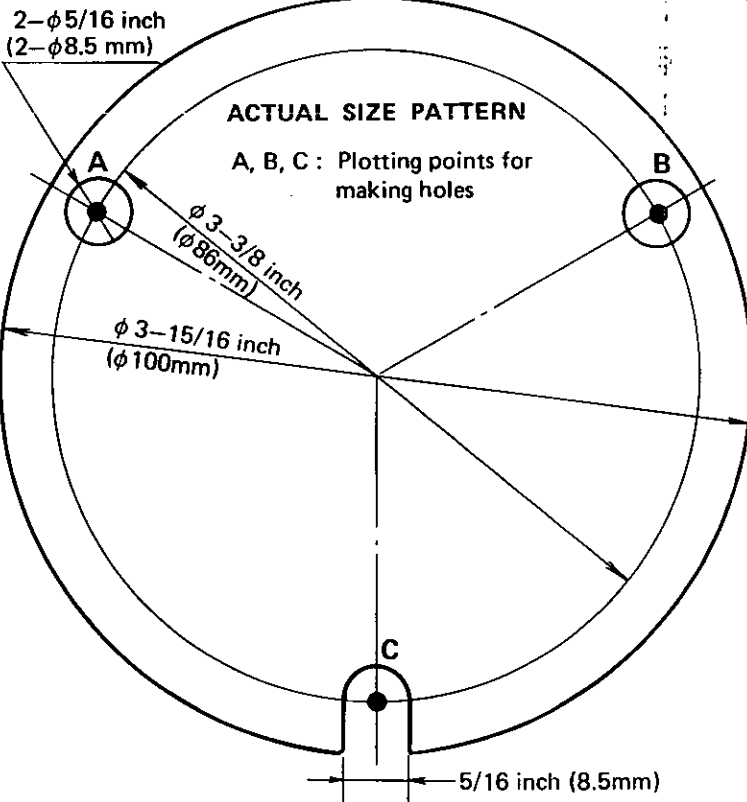

## ■ PREFACE

### WV-7010 – Ceiling Mount:

Indoor use – will hold camera with fixed focal lens and camerahousing model WV-7120, for mounting on ceiling or stand, comes with universal head for multi-directional viewing. Holds up to 9 lbs. (4kg).

### WV-7015 – Wall Mount:

Indoor use – will hold camera with fixed focal lens and camerahousing on wall, comes with universal head for multi-directional viewing. Holds up to 9 lbs. (4 kg).

## ■ SPECIFICATIONS

Model	WV-7010A	WV-7015
Dimensions (HxWxD)	Approx. 5-7/8" x $\phi$ 3-15/16" 149x $\phi$ 100(mm)	Approx. 7-1/2" x 3-15/16" x 10-5/8" 190x100x270(mm)
Weight (Approx.)	0.7 lbs, 320g	1.39 lbs, 630g
Load Weight	9 lbs, 4 kg	