




A BOARD TNP8EA006

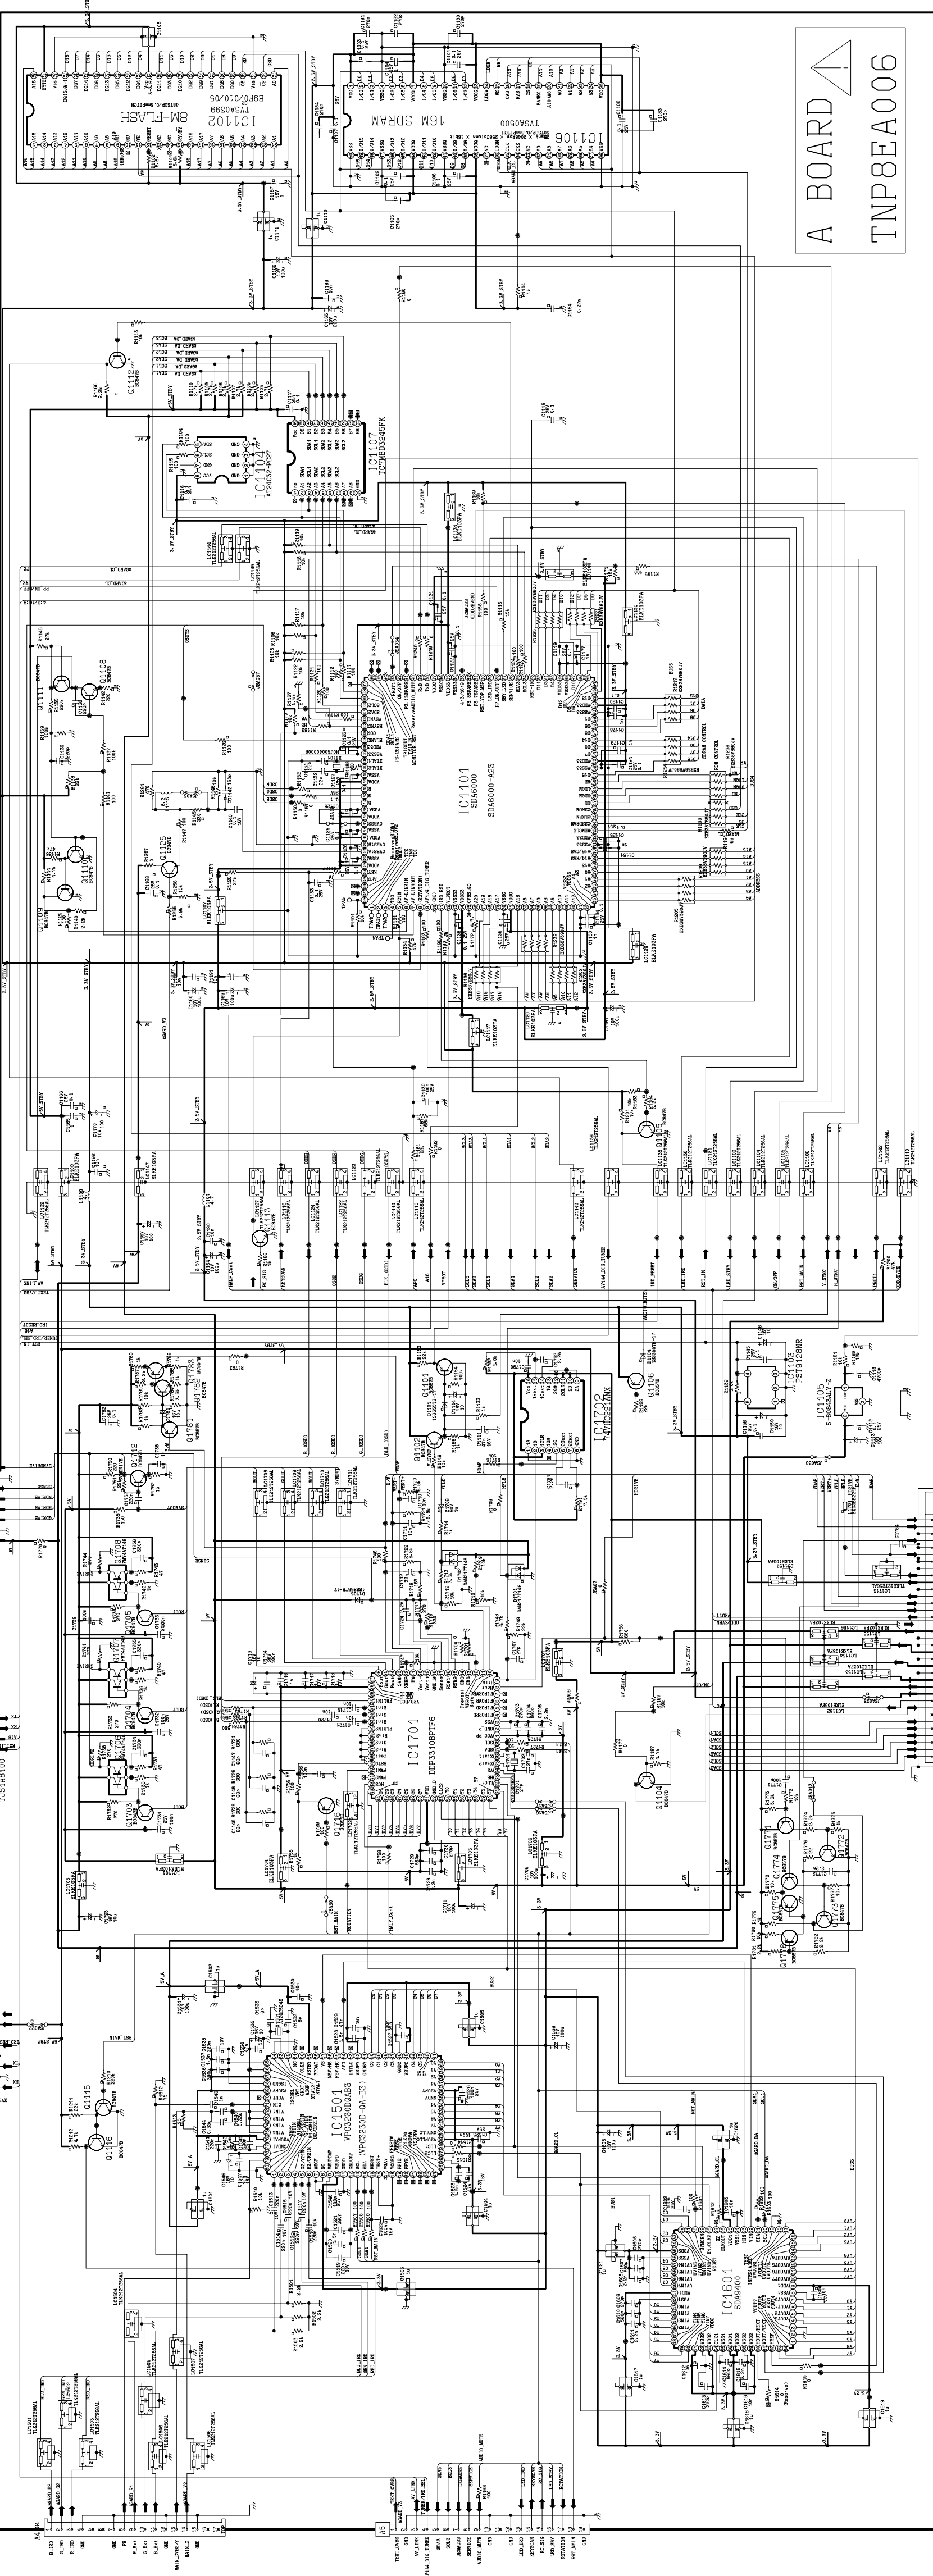

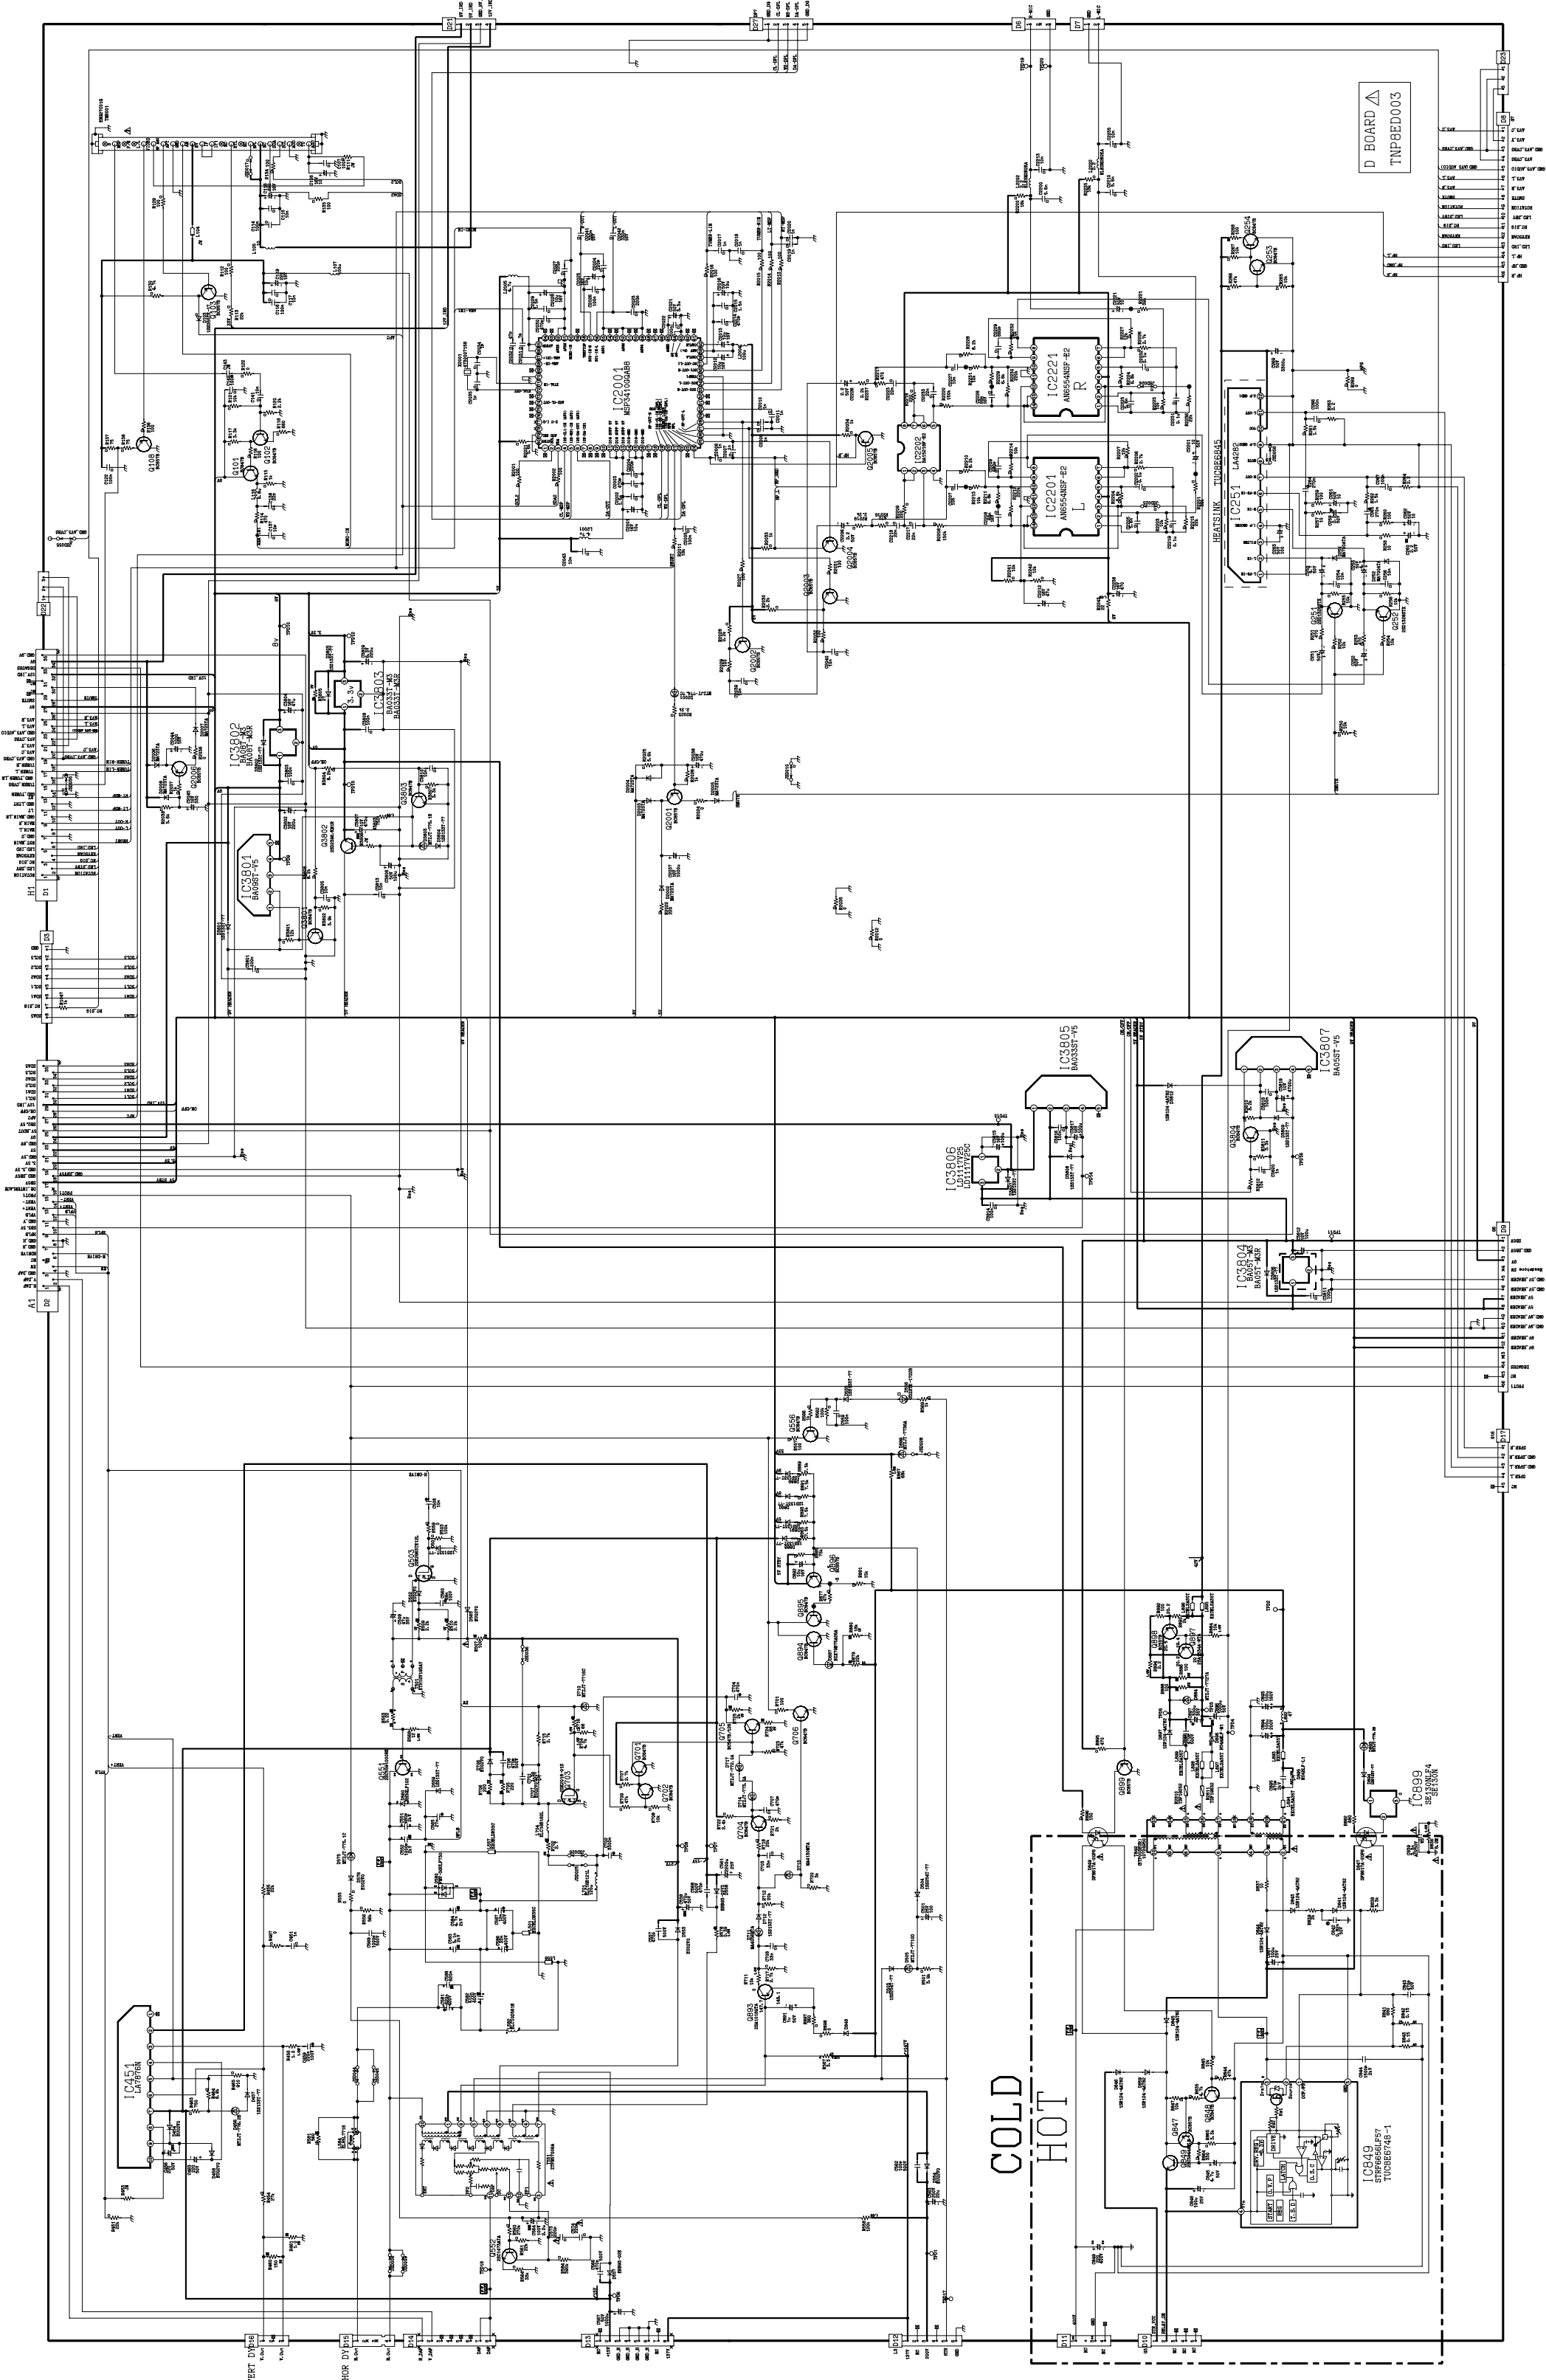

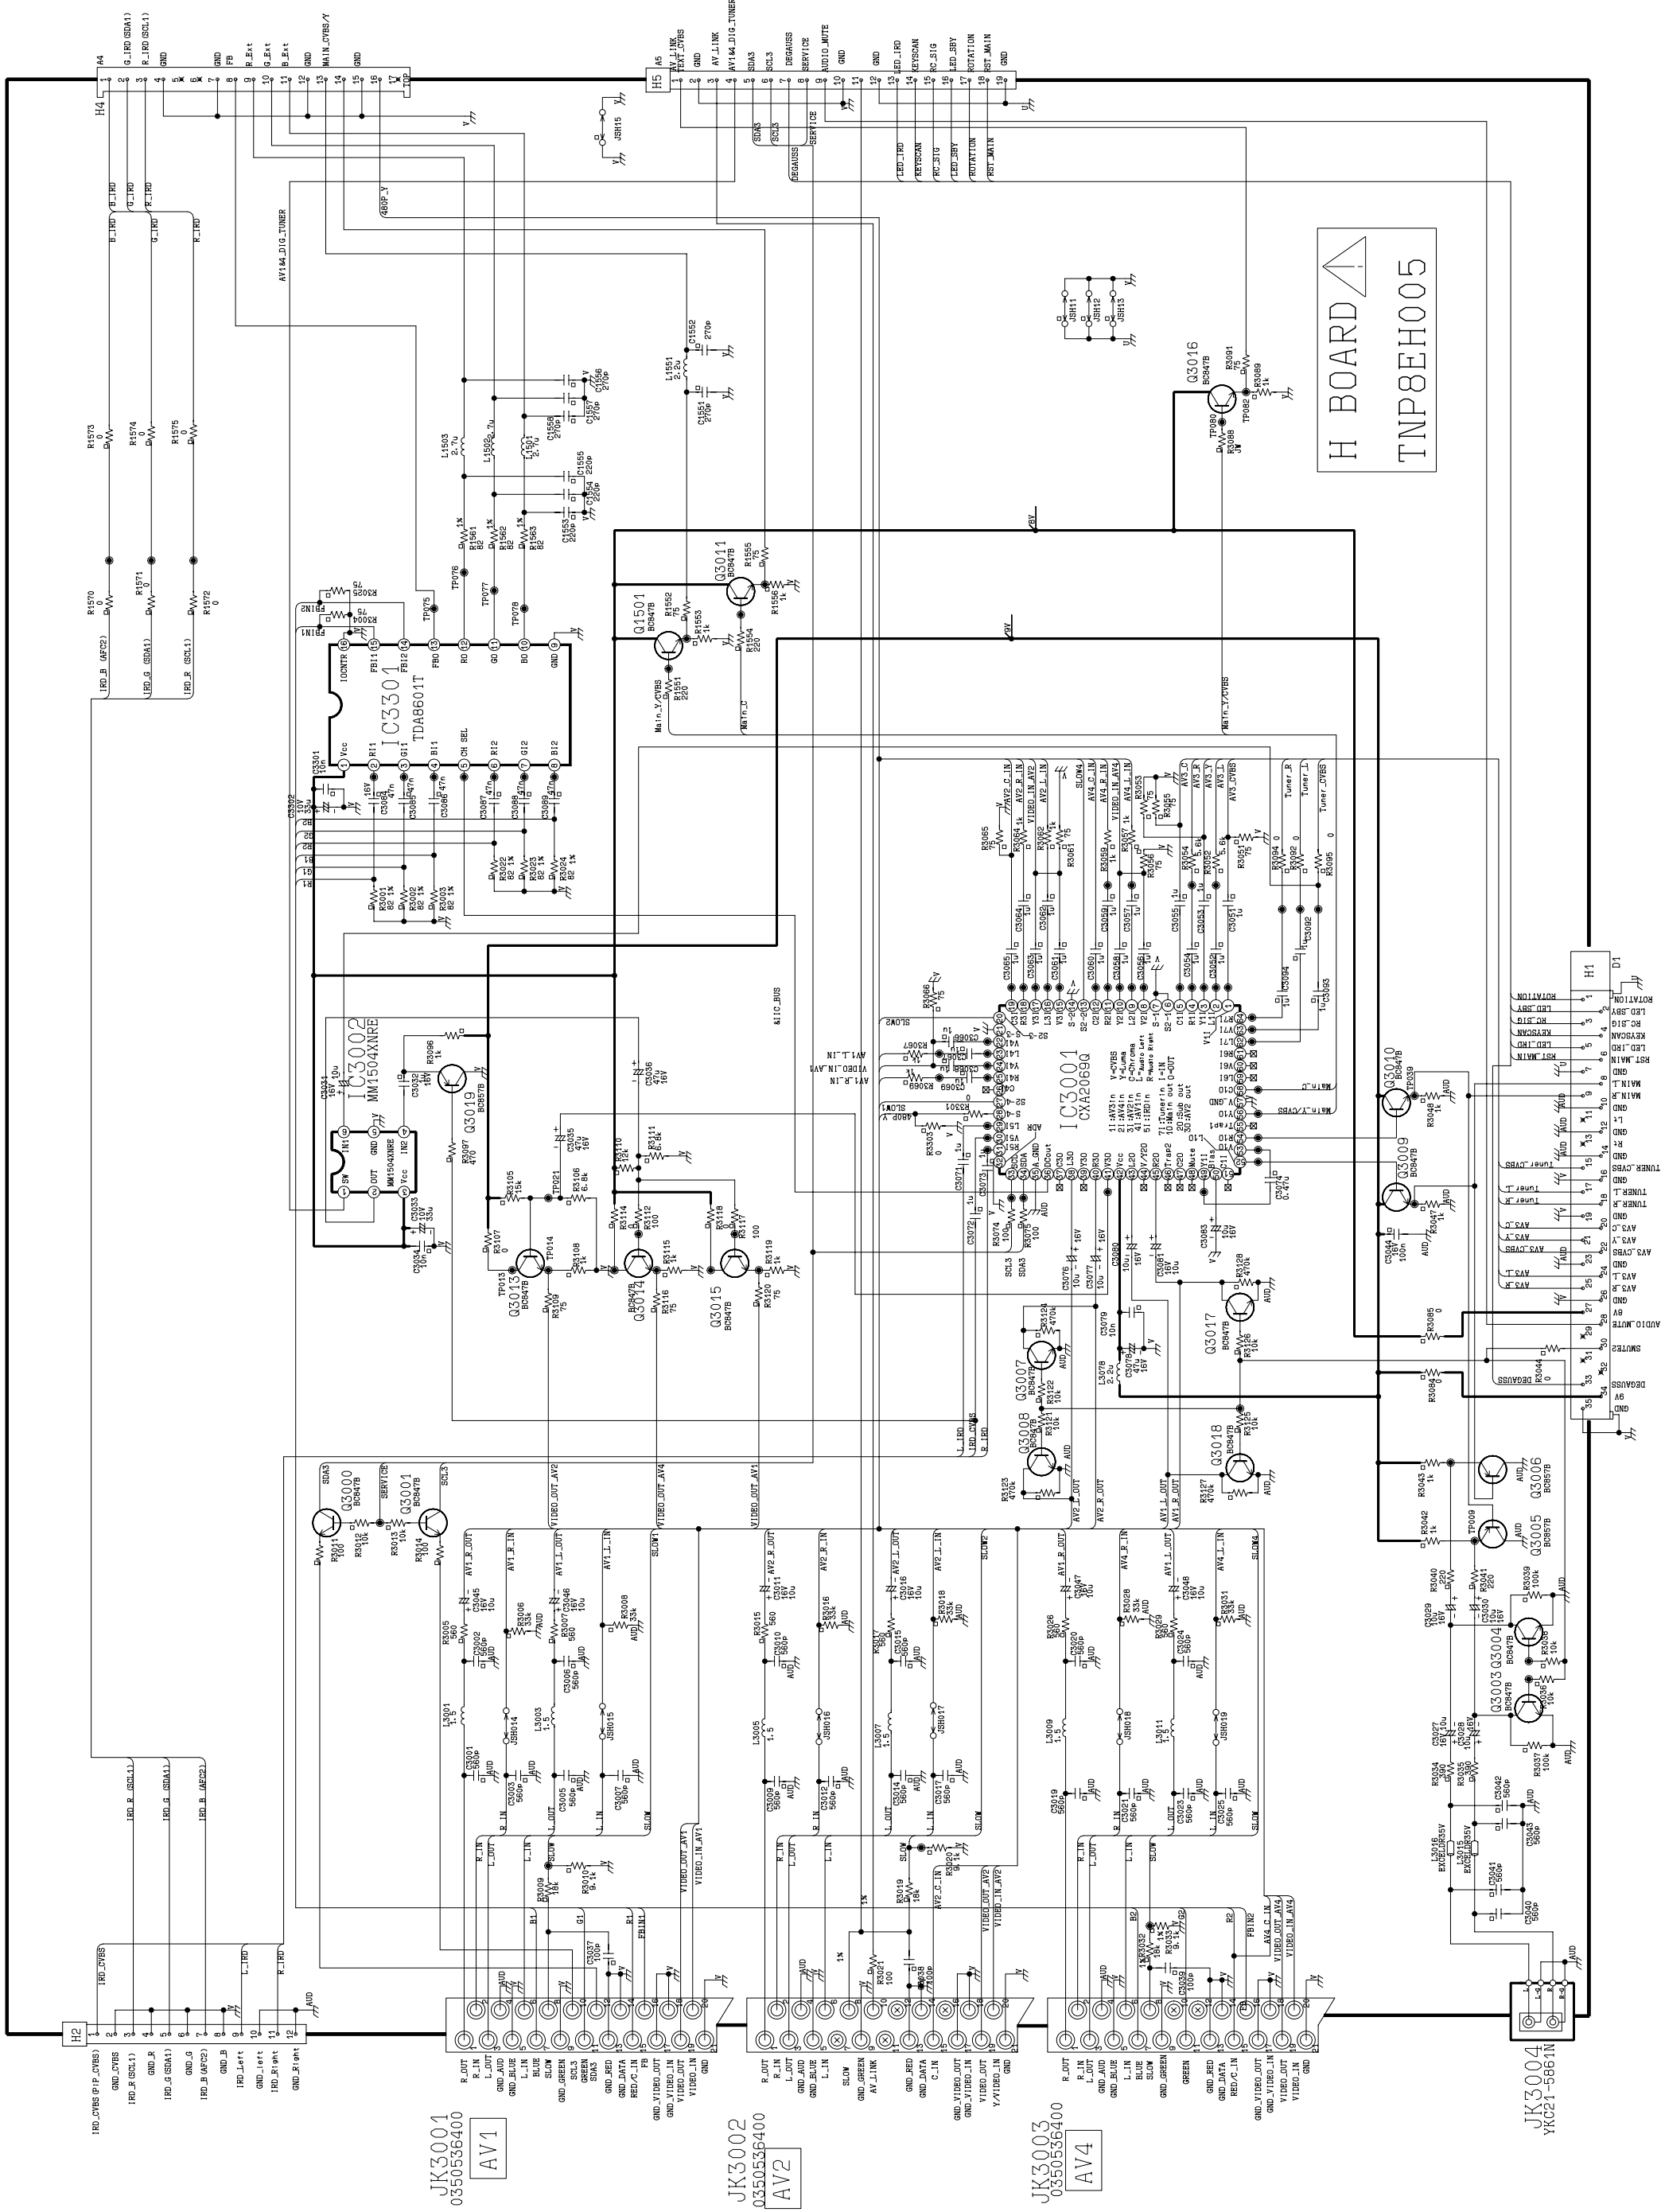

H BOARD
TNP8EH005

JK3001
0350536400

AV1


JK3002
0350536400

AV2

JK3003
0350536400



AV4

JK3004
YK21-5861N

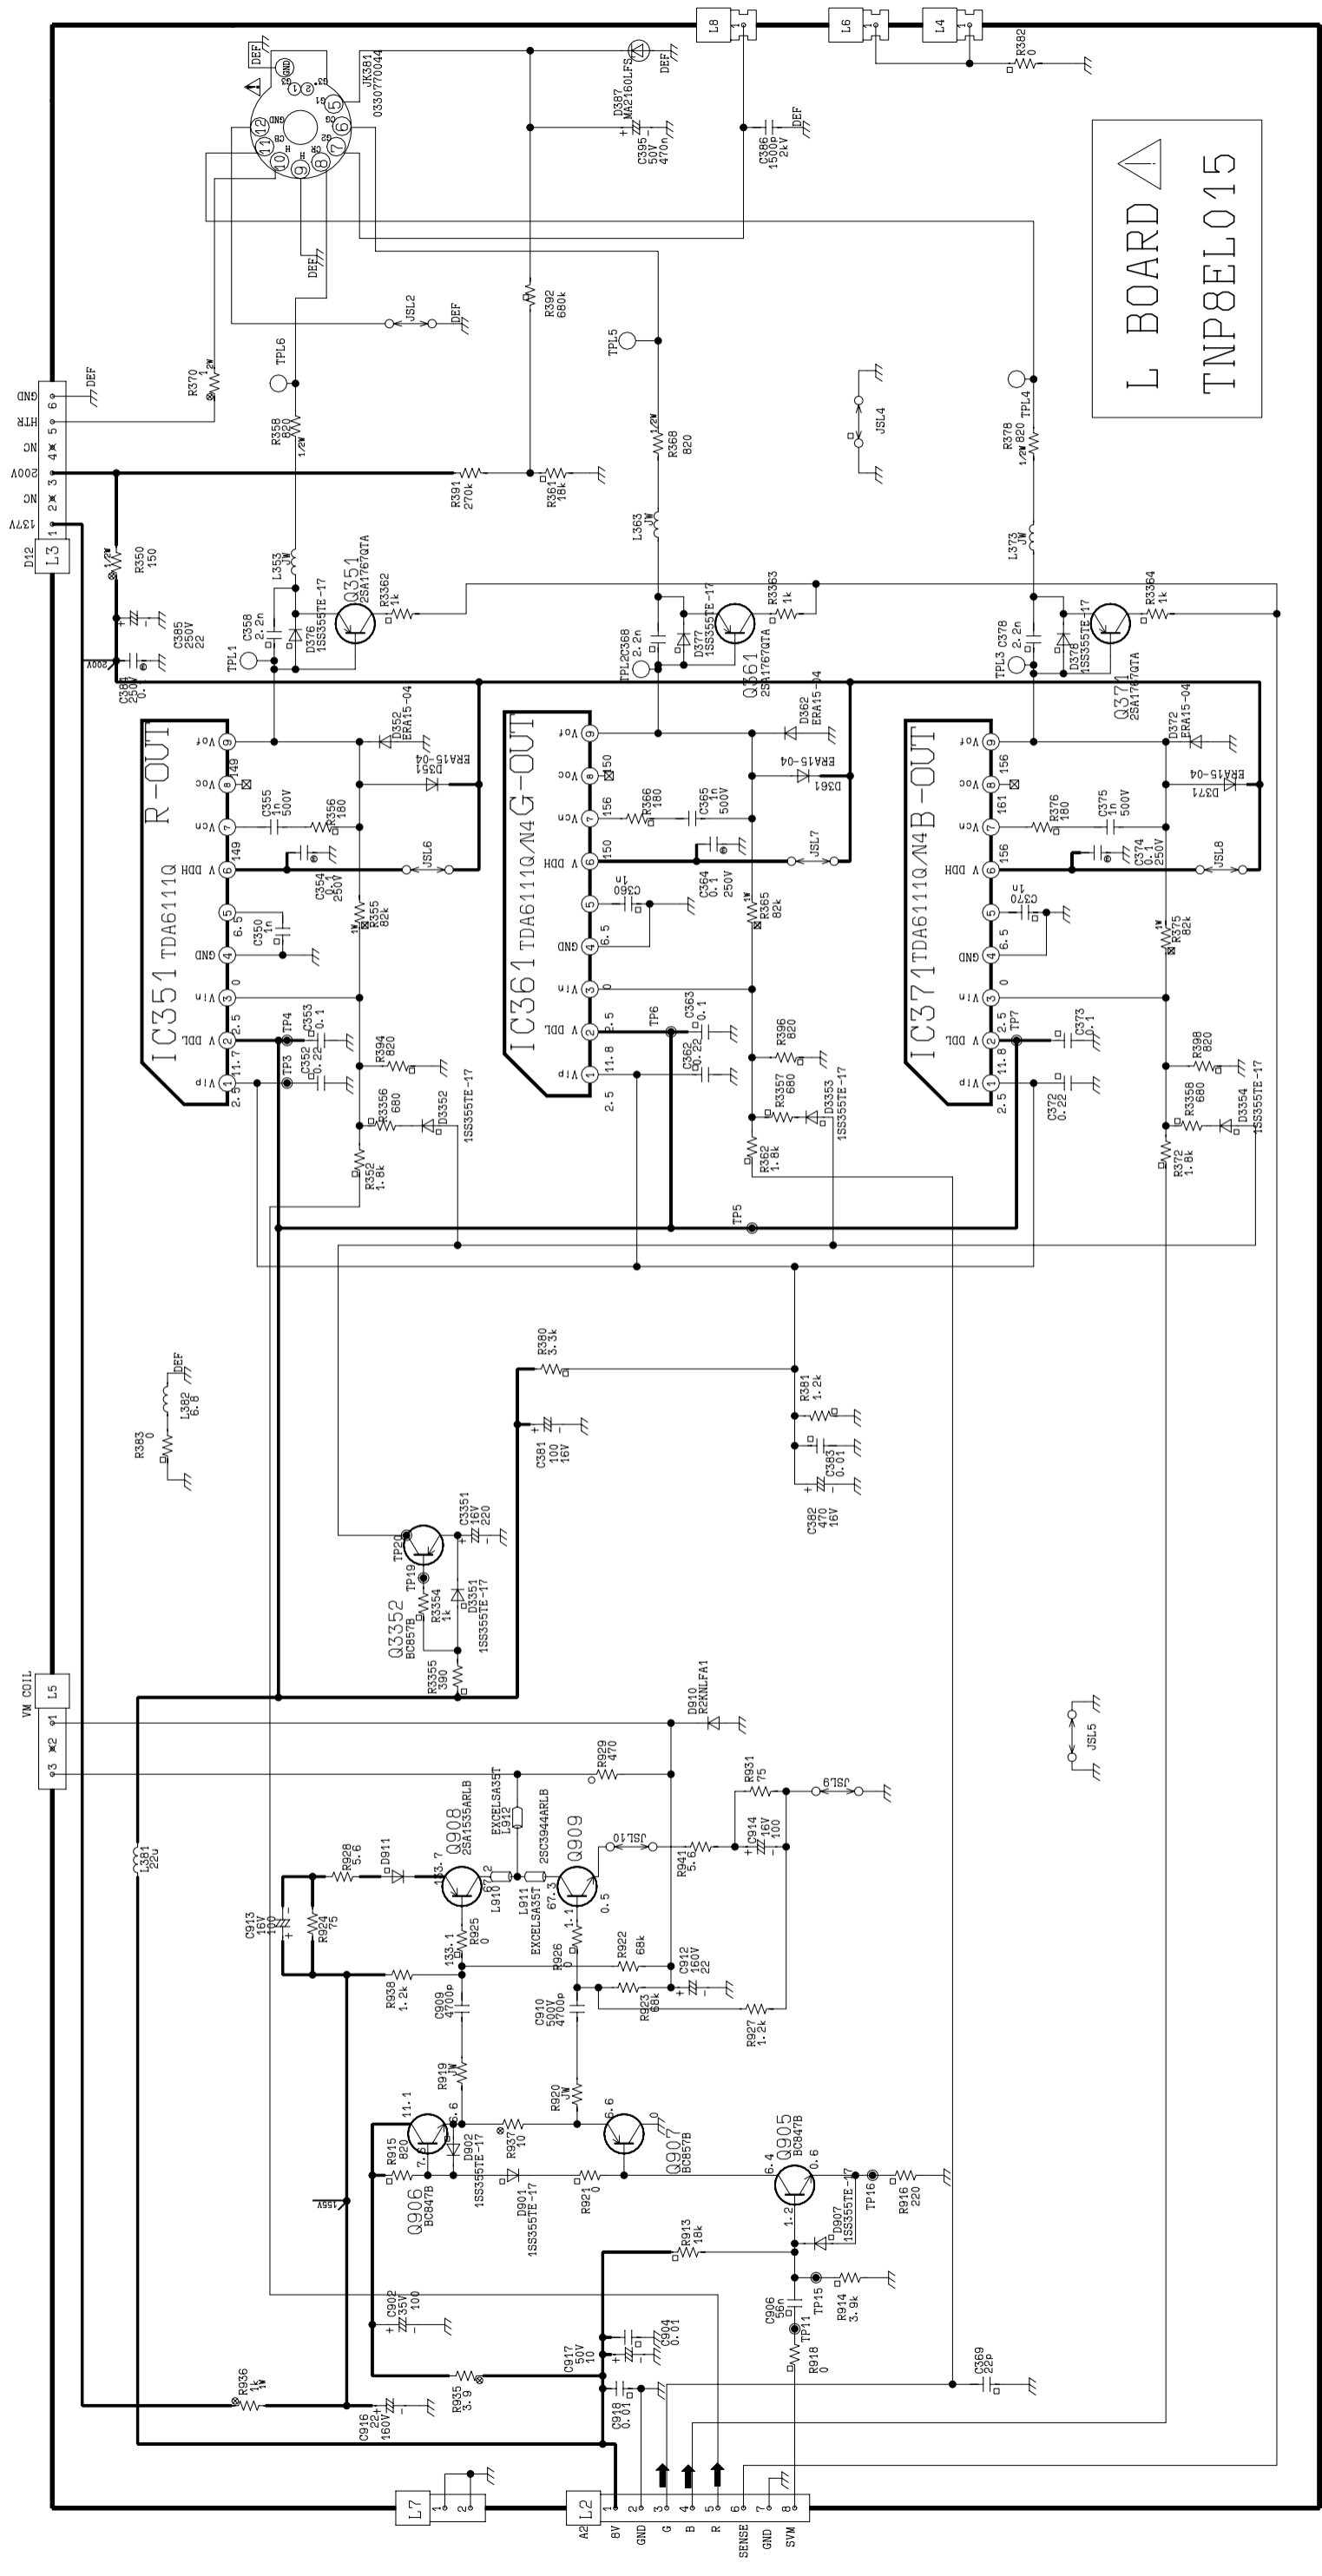


L BOARD
TNP8EL015


TNRS001
ENV8TE15D5

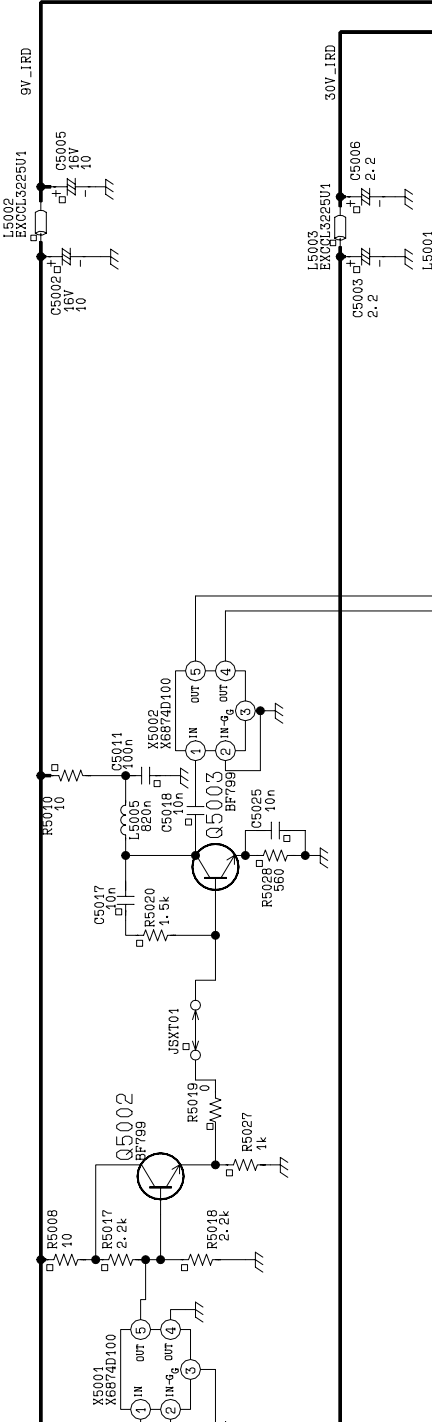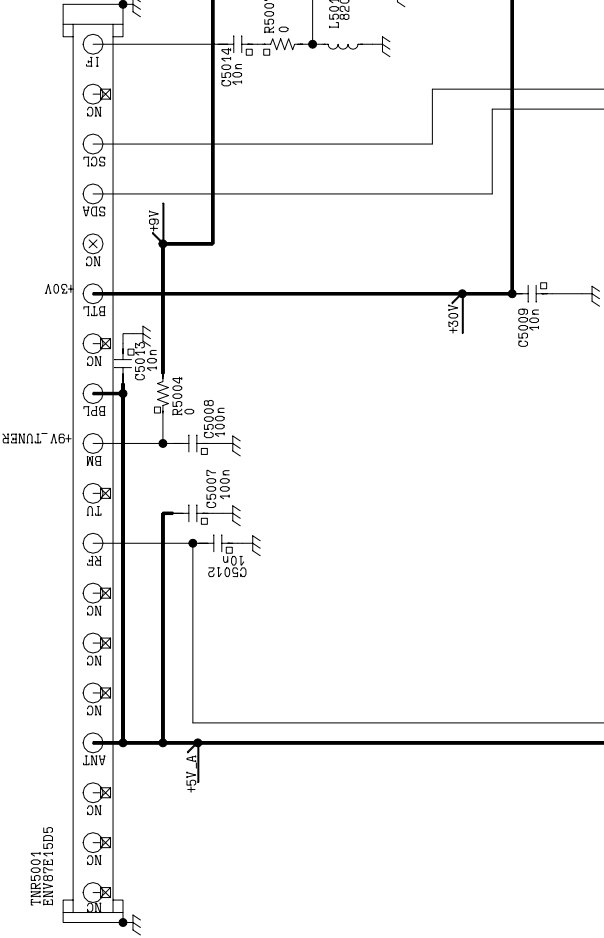



IC5001
LA783V

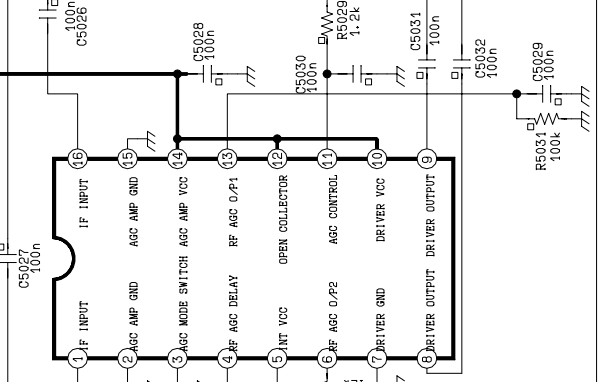

IC5002
CX22700

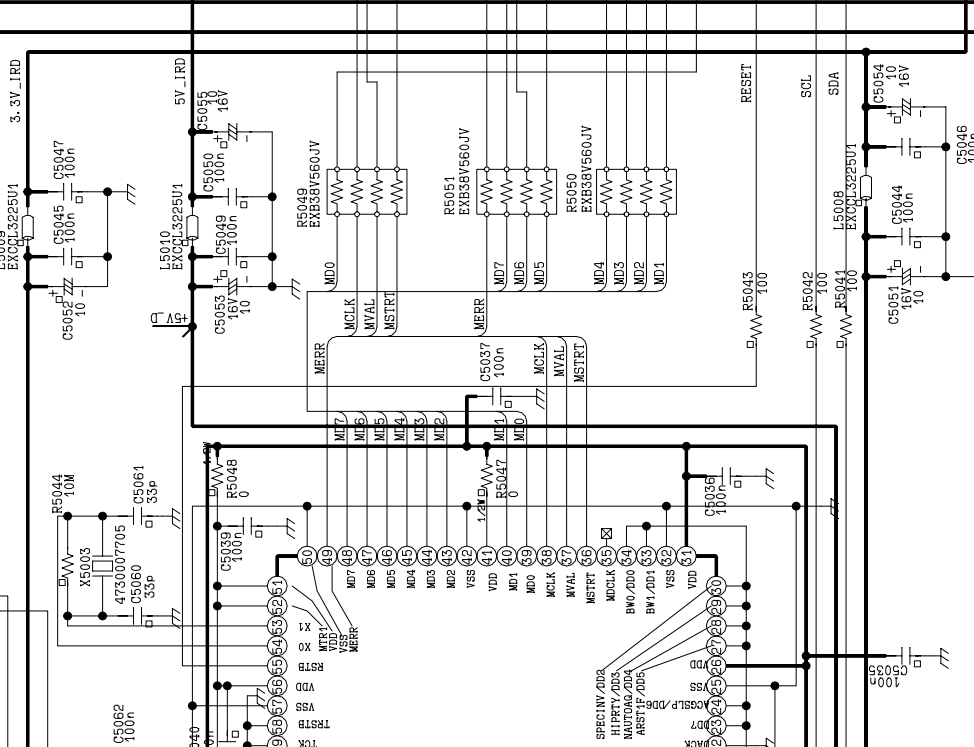



XT BOARD
TNP8EXT01

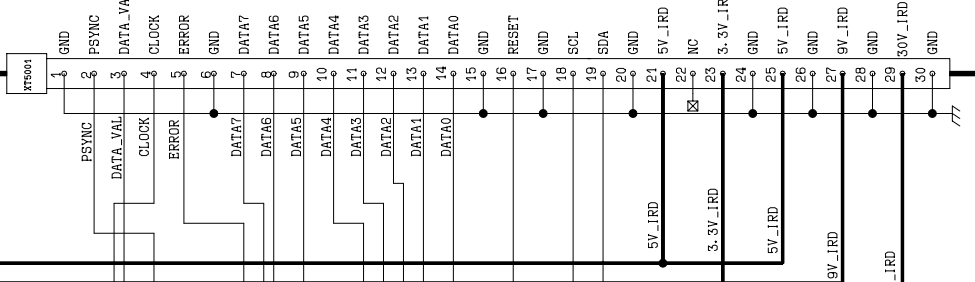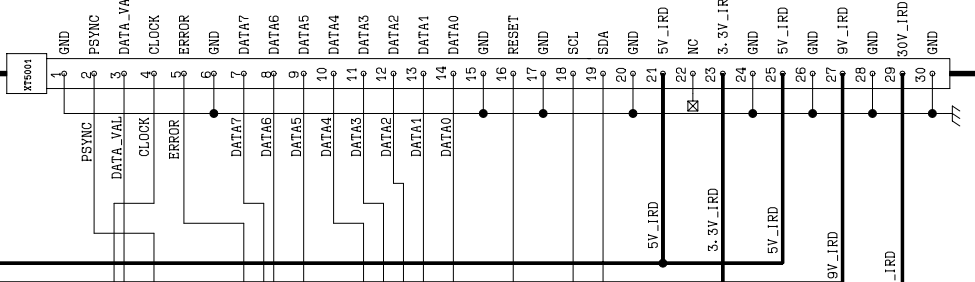

Z BOARD


TNP8EZ004

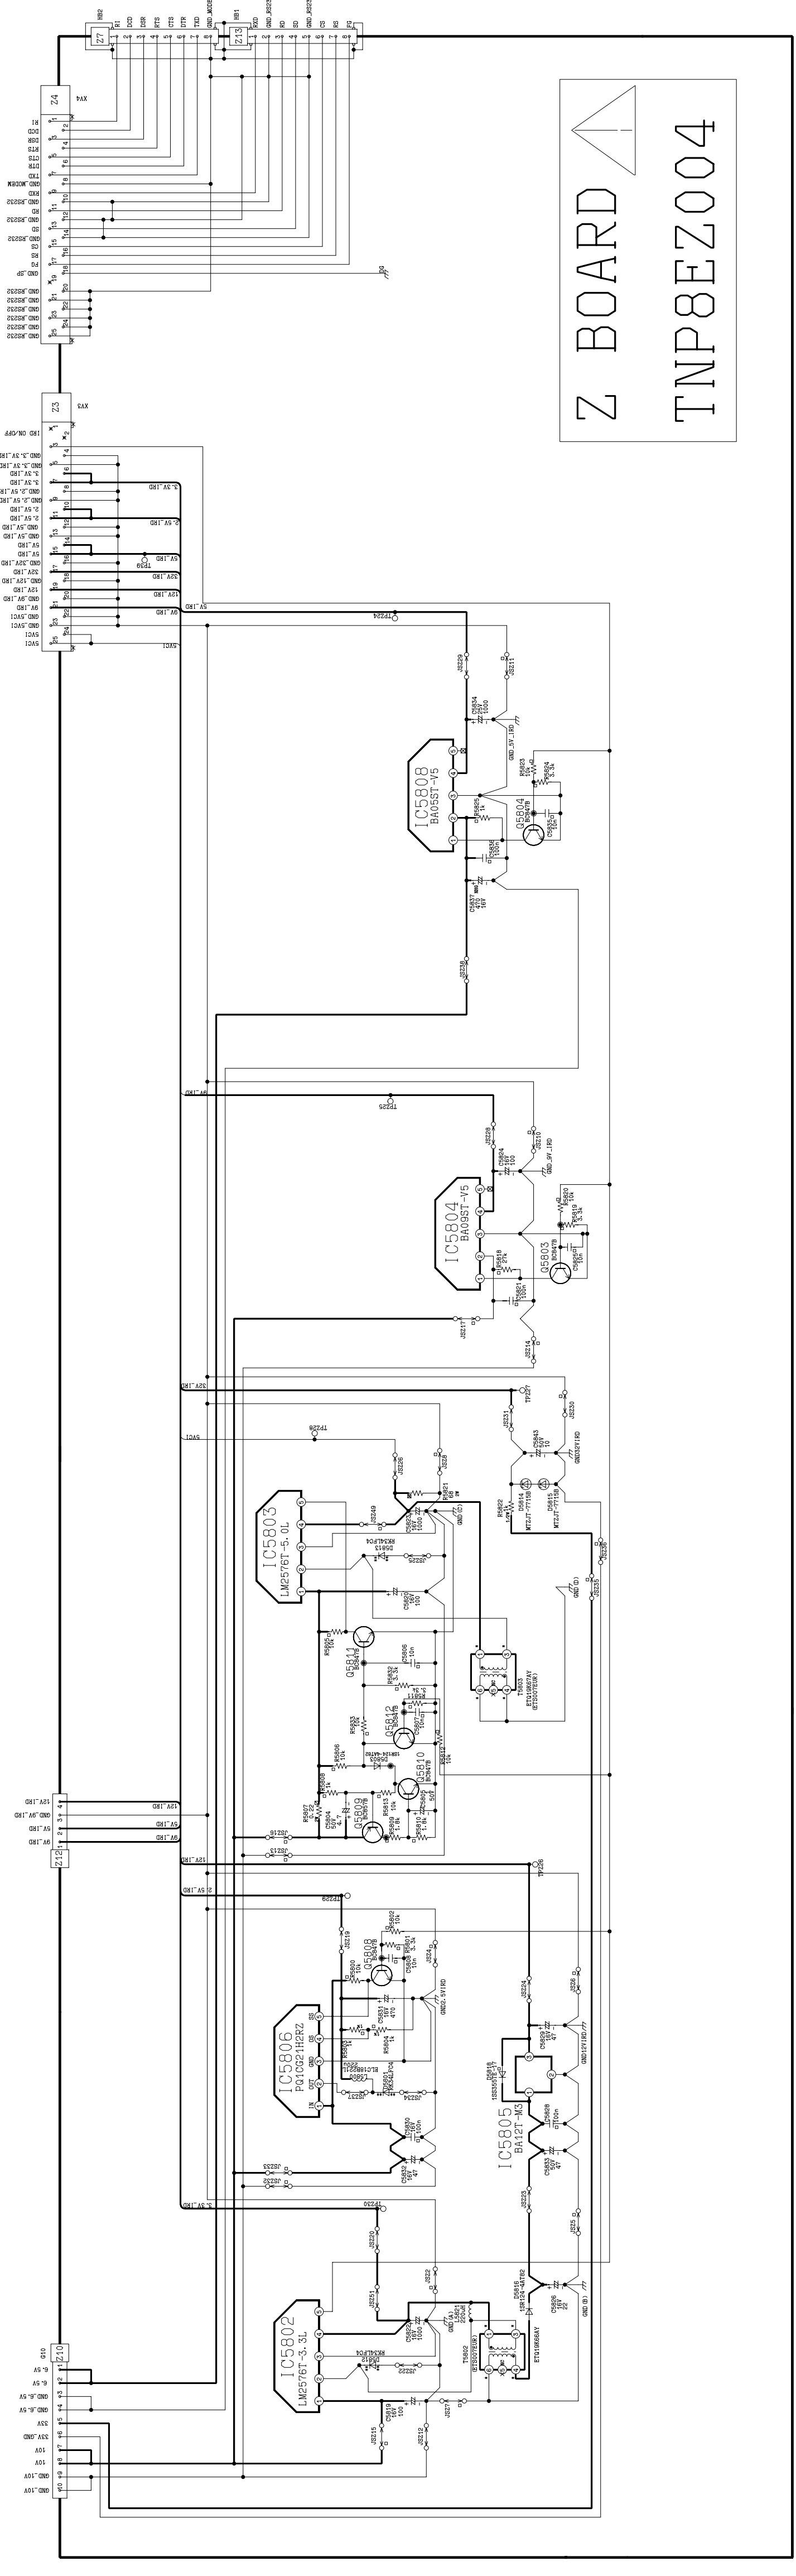

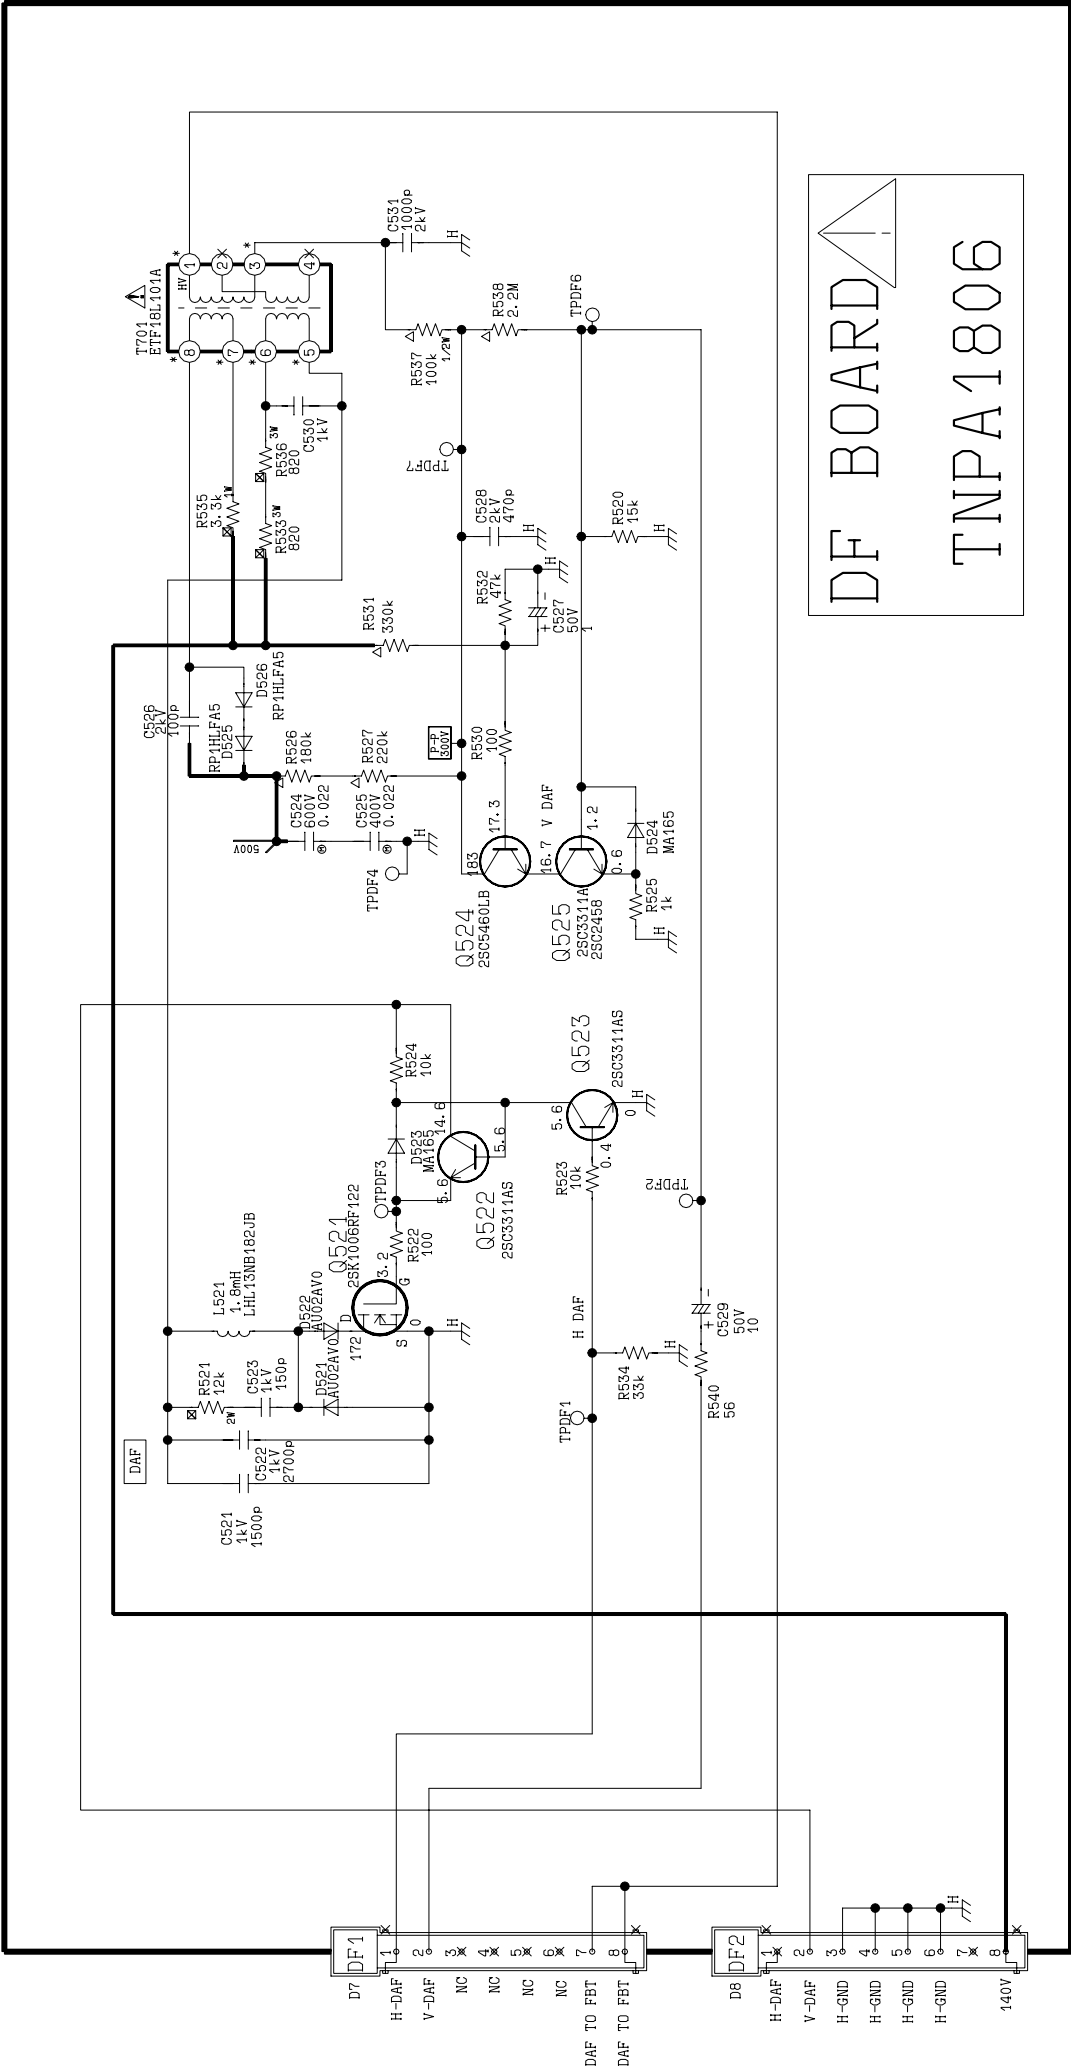

DF BOARD


TNPA1806

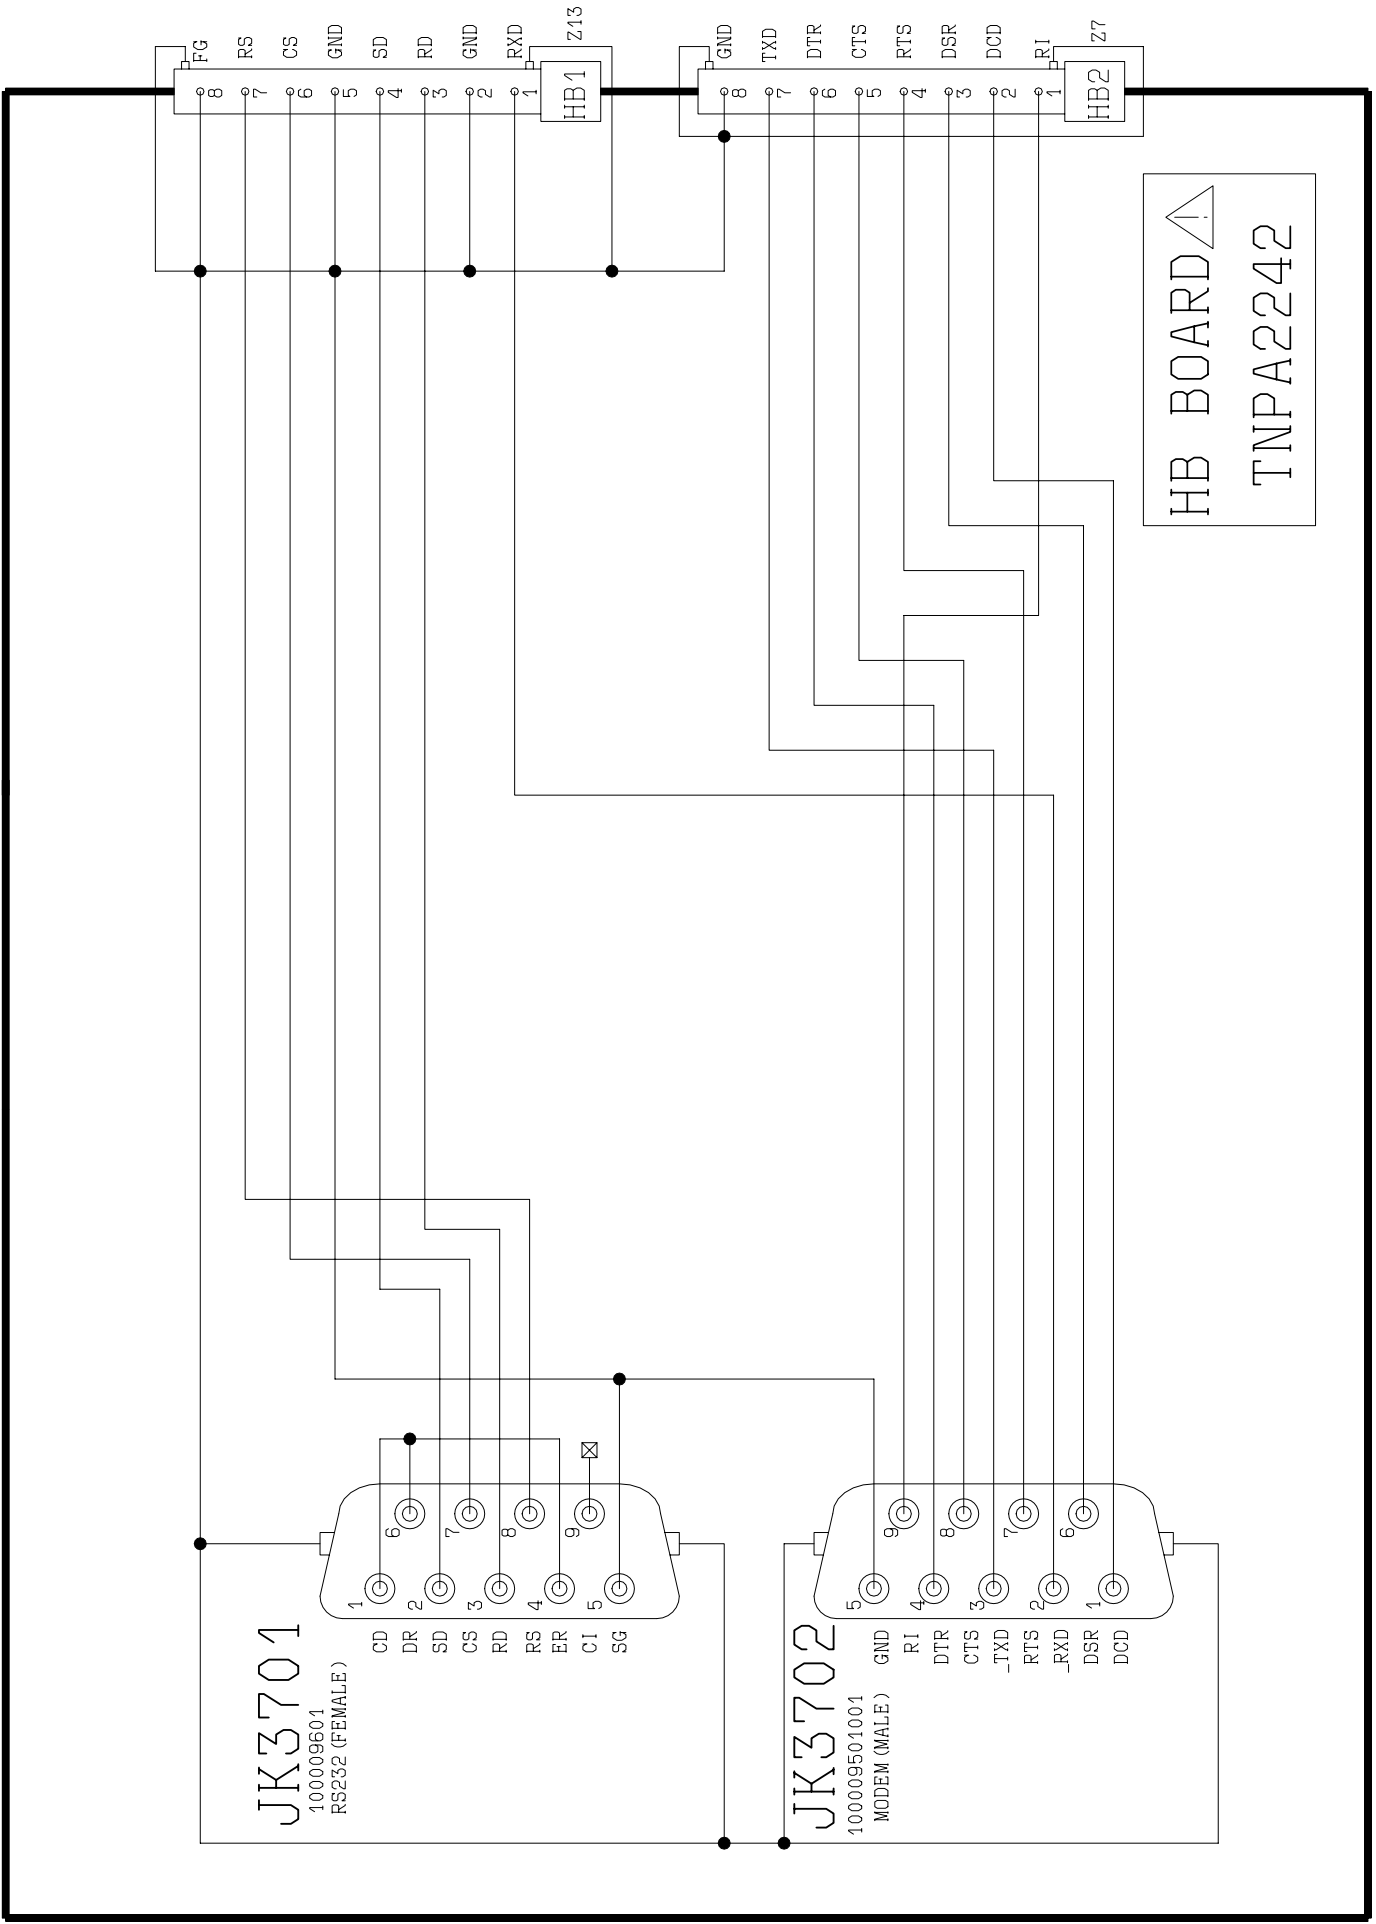





















HB BOARD
 TNPA2242

REPLACEMENT PARTS LIST

Important Safety Notice

Components Identified by  mark have special characteristics important for safety.
 * When replacing any of these components, use only manufacturers specified parts.
 In case of ordering these spare parts, please always add the complete Model-Type number to your order.

Cct Ref	Parts Number	Description
EXPLODED VIEW		
1	EABG12506C2	SPEAKER
2	ENV87E15D5	TUNER
3	EUR511241	REMOTE CONTROL
4	TBMA060	PANASONIC BADGE
5	TBX8E089	POWER BUTTON
6	TKP8E1430	DOOR LID
7	TKP8E1473	IRD PCB BRACKET
8	TKU8E00670	BACK COVER 
9	TKY8E550	CABINET 
10	TLK8E05178	DEGAUSS COIL 
11	TMX8E058	CHASSIS FRAME
12	TNP8EA006AA	A P.C.B. 
13	TNP8ED003AA	D P.C.B. 
14	TNP8EG003AA	G P.C.B. 
15	TNP8EH005AA	H P.C.B. 
16	TNP8EL015AA	L P.C.B. 
17	TNP8EXT01AA	XT P.C.B. 
18	TNP8EZ004AB	Z P.C.B. 
19	TNPA1806AM	DF P.C.B. 
20	TNPA2241AB	XV P.C.B. 
21	TNPA2242AB	HB P.C.B. 
22	TQF8E3276	MODEL LABEL 
23	TXASX01CRKG1	AC POWER CORD 
24	TXJ/FCOCJEG	FOCUS LEAD ASSEMBLY 
25	UR51EC904-1	BATTERY COVER(REMOTE)
26	W76EKW10X71	CRN 
27	ZTBZAD550A	ANODE CABLE 
28	ZTFN57006A	FBT 
MISCELLANEOUS COMPONENTS		
.	EASG7D506B2	SPEAKER TWEETER
.	TBM8E2137	PRESET LABEL
.	TBM8E2138	PRESET LABELRIGHT
.	TBM8E2142	REAR AV LABEL
.	TEK6935	LID SWITCH
.	TES2298	CRT EARTH SPRING
.	TKK8E026	SPEAKER REFLECTOR
.	TKP8E1341	SPEAKER PANEL LEFT
.	TKP8E1346	SPEAKER PANEL RIGHT
.	TKP8E1364	BOTTOM PANEL RIGHT
.	TKP8E1474	CI MODULE COVER
.	TKP8E1497-1	REAR AV PANEL
.	TKP8E1497-B	PANEL ASSEMBLY
.	TKP8E1504	LED/IR WINDOW
.	TKP8E1505	BOTTOM PANEL LEFT
.	TPC8E4928	OUTER CARTON
.	TPD8E761	TOP CUSHION
.	TPD8E762	BOTTOM CUSHION
.	TPD8E776	SUB CUSHION
.	UM-3DJ-2P	BATTERY PACK
JK5401	MG68HDW125NF	PC CARD CONNECTOR
R537	ERC12GK104V	DEGAUSS RESISTOR

Cct Ref	Parts Number	Description
ROT	TLK8E05177	ROTATION COIL 
SK421	THT1062	CRT FIXING SCREW
SK422	THT1062	CRT FIXING SCREW
SK423	THT1062	CRT FIXING SCREW
SK424	THT1062	CRT FIXING SCREW
I.C.s		
IC251	LA4282	AUDIO OUTPUT
IC351	TDA6111Q-N4	RGB OUTPUT
IC361	TDA6111Q-N4	RGB OUTPUT
IC371	TDA6111Q-N4	RGB OUTPUT
IC451	LA7876N	VERTICAL OUTPUT
IC801	STRX6456LF01	POWER SWITCHING
IC849	STRF6656LF57	POWER SUPPLY
IC851	TL431CLPM	REGULATOR
IC899	SE130N	ERROR AMPLIFIER
IC1101	SDA6000-A23	MICRO PROCESSOR
IC1102	E9F0/030/05	EPROM*
IC1103	PST9128NR	RESET
IC1105	AT24C32-PC27	EAROM*
IC1105	S-80843ALY-Z	5V REGULATOR
IC1106	TVSA0500	SDRAM
IC1107	TC7MBD3245FK	CONVERTER
IC1501	VPC3230DQAB3	VIDEO PROCESSOR
IC1601	SDA9400	MICRO PROCESSOR
IC1701	DDP3310BPTF6	DIGITAL DISPLAY PROCES
IC1702	74VHC221AMX	HORIZONTAL DAF
IC1900	LA6515	EARTH CORRECTION
IC2001	MSP3410GQAB8	NICAM SOUND
IC2201	AN6554NSF-E2	OPERATIONAL AMPLIFIER
IC2202	BA15218F-E2	AMPLIFIER
IC2221	AN6554NSF-E2	OPERATIONAL AMPLIFIER
IC2351	NJM4556AD	HEADPHONE AMPLIFIER
IC3001	CXA2069Q	AUDIO SWITCHING
IC3002	MM1504XNRE	VIDEO SWITCH
IC3301	TDA8601T/C1	12V REGULATOR
IC3801	BA09ST-V5	9 VOLT REGULATOR
IC3802	BA08T-M3R	8 VOLT REGULATOR
IC3803	BA033T-M3	REGULATOR
IC3804	BA05T-M3R	5 VOLT REGULATOR
IC3805	BA033ST-V5	5 VOLT REGULATOR
IC3806	LD1117V25C	2.5 VOLT REGULATOR
IC3807	BA05ST-V5	5 VOLT REGULATOR
IC5001	LA7783V	DUAL IF/RF AMPLIFIER
IC5002	CX22700	DEMULATOR/DECODER
IC5101	C0FBBZ000013	AUDIO DAC
IC5102	BA15218FDXE2	OP-AMP
IC5201	MN2WS0002AD2	BALL GATE ARRAY
IC5202	PCF8593T.118	CMOS EEPROM
IC5204	C0JBBZ000244	DATA BUFFER
IC5205	C0JBAA000244	LOGIC
IC5206	AM29LV160DB	16 MEG FLASH
IC5206	E9F0/021/04	16 MEG FLASH

Cct Ref	Parts Number	Description
IC5207	C0EBF0000086	RESET
IC5208	74VHCU04MX	LOGIC
IC5209	B39S64160BT8	64 MBIT DRAM
IC5210	B39S64160BT8	64 MBIT DRAM
IC5211	C0JBBZ000228	IF MEMORY CARD
IC5212	C0ZBZ0000488	LOGIC
IC5213	C0CBCBC00037	5 PIN REGULATOR
IC5401	C0JBAC000288	RESET
IC5402	C0JBBZ000244	DATA BUFFER
IC5403	C0JBAZ001692	BUFFER
IC5404	C0JBAF000444	LOGIC
IC5405	C0JBAC000288	RESET
IC5406	CXD1957AQ-TL	CI CONTROL DEVICE
IC5407	C0JBAB000458	LOGIC
IC5408	C0JBAZ001692	BUFFER
IC5409	C0JBAZ001692	BUFFER
IC5410	C0JBAZ001692	BUFFER
IC5411	C0JBAZ001692	BUFFER
IC5412	C0JBAZ001692	BUFFER
IC5413	C0JBAZ001692	BUFFER
IC5414	C0JBAZ001692	BUFFER
IC5415	C0JBAZ001692	BUFFER
IC5601	MN864601B	SUPER 1394
IC5701	C1AB00001459	SID1 GATE ARRAY
IC5702	C0JBBZ000228	IF MEMORY CARD
IC5802	LM2576T-3.3L	3.3 VOLT REGULATOR
IC5803	LM2576T-5.0L	5 VOLT REGULATOR
IC5804	BA09ST-V5	9 VOLT REGULATOR
IC5805	BA12T-M3	12V REGULATOR
IC5806	PQ1CG21H2RZ	REGULATOR
IC5808	BA05ST-V5	5 VOLT REGULATOR
IC5861	C0EBH0000181	RESET
IC5862	C0JBAF000444	LOGIC
Q5404	NE06FP(025Y)	MOSFET AMPLIFIER
Q5405	NE06FP(025Y)	MOSFET AMPLIFIER
RC1001	RPM6937	LED RECEIVER
FUSES		
F801-R	EYF52BC	FUSE HOLDER
F801-L	EYF52BC	FUSE HOLDER
F801	XBA2C50TH15	FUSE
R850	TR5-T1000	FUSE
R857	TR5-T4000	FUSE
R858	TR5-T4000	FUSE
DIODES		
C817	BZX79A24B	DIODE
D103	1SS355TE-17	DIODE
D251	MA700TA5	DIODE
D252	MA700TA5	DIODE
D351	ERA15-04V3	DIODE
D352	ERA15-04V3	DIODE
D361	ERA15-04V3	DIODE
D362	ERA15-04V3	DIODE
D371	ERA15-04V3	DIODE
D372	ERA15-04V3	DIODE
D376	1SS355TE-17	DIODE
D377	1SS355TE-17	DIODE
D378	1SS355TE-17	DIODE
D387	MA2160LFS	DIODE
D454	EU02	DIODE
D456	MTZJT776.2B	DIODE
D457	MA165TA5	DIODE
D458	EU02	DIODE
D501	MA165TA5	DIODE
D502	EU02	DIODE
D503	1SS254T-77	DIODE
D504	1SS254T-77	DIODE

△
△
△
△

Cct Ref	Parts Number	Description
D505	MTZJT-7710D	DIODE
D521	AU02AV0	DIODE
D522	AU02AV0	DIODE
D523	MA165TA5	DIODE
D524	MA165TA5	DIODE
D525	RP1HLFA5	DIODE
D526	RP1HLFA5	DIODE
D553	EU02	DIODE
D554	EU02	DIODE
D555	MA165TA5	DIODE
D556	UDZSTE-1722B	DIODE
D557	ERB93-02E	DIODE
D558	ERB93-02E	DIODE
D559	MA165TA5	DIODE
D560	RH3GLF102	DIODE
D565	EU02	DIODE
D575	MTZJT-775.1C	DIODE
D576	EU02	DIODE
D580	FMV-3GULF730	DIODE
D706	EU02	DIODE
D707	EU02	DIODE
D710	MTZJT-7716C	DIODE
D711	MA4056MTA	DIODE
D712	MA165TA5	DIODE
D713	MA4130MTA	ZENER DIODE
D714	MA4036MTA	DIODE
D717	MTZJT-772.0A	DIODE
D801	RBV-608LF-B	DIODE
D802	MA165TA5	DIODE
D803	MA165TA5	DIODE
D804	MA165TA5	DIODE
D805	232266296706	THERMISTOR
D806	232266296706	THERMISTOR
D807	1SR124-4AT82	DIODE
D810	TLP621GR-LF2	PHOTO COUPLER
D811	SARS01V1	DIODE
D813	MTZJT-775.6B	DIODE
D815	MA165TA5	DIODE
D816	1SR124-4AT82	DIODE
D817	1SR124-4AT82	DIODE
D819	MA165TA5	DIODE
D820	BZX79B75A26A	SMT DIODE
D821	BZX79B75A26A	SMT DIODE
D822	MA165TA5	DIODE
D823	MA165TA5	DIODE
D841	1SR124-4AT82	DIODE
D843	1SR124-4AT82	DIODE
D844	1SR124-4AT82	DIODE
D845	1SR124-4AT82	DIODE
D846	1SR124-4AT82	DIODE
D847	TLP621GR-LF2	PHOTO COUPLER
D849	TLP621GR-LF2	PHOTO COUPLER
D850	STPS8H100FP	DIODE
D851	RK46LF-M1	DIODE
D852	1SR124-4AT82	DIODE
D857	EU02	DIODE
D858	MA165TA5	DIODE
D859	1SR124-4AT82	DIODE
D884	MTZJT-7727A	ZENER DIODE
D887	BZX79B75A26A	SMT DIODE
D888	MA165TA5	DIODE
D889	MA165TA5	DIODE
D890	MA165TA5	DIODE
D891	MA165TA5	DIODE
D893	MTZJT776.2B	DIODE
D894	MA165TA5	DIODE

△

△

△

△





△

△

Cct Ref	Parts Number	Description
D895	RU4BLF-L1	DIODE
D896	RU4AMLF-M1	DIODE
D897	1SR124-4AT82	DIODE
D899	MTZJT-7736A	DIODE
D901	1SS355TE-17	DIODE
D902	1SS355TE-17	DIODE
D907	1SS355TE-17	DIODE
D910	R2KNLFA1	DIODE
D1001	LNH201RFCF6	LED
D1002	LN41YPH	L.E.D.
D1004	MTZJT-778.2C	DIODE
D1101	1SS355TE-17	DIODE
D1104	1SS355TE-17	DIODE
D1201	1SS355TE-17	DIODE
D1701	DAN217T146	DIODE
D1702	DAN217T146	DIODE
D1703	1SS355TE-17	DIODE
D1901	MTZJT-777.5B	DIODE
D1902	MA165TA5	DIODE
D2001	MTZJ4.7C	DIODE
D2002	MA723TA5	DIODE
D2003	MA723TA5	DIODE
D2004	MA723TA5	DIODE
D2005	MA723TA5	DIODE
D2006	MA723TA5	DIODE
D2007	MA723TA5	DIODE
D2008	MA723TA5	DIODE
D2351	1SS355TE-17	DIODE
D2352	1SS355TE-17	DIODE
D2353	1SS355TE-17	DIODE
D2354	1SS355TE-17	DIODE
D2355	1SS355TE-17	DIODE
D3201	MTZJT-778.2C	DIODE
D3202	MTZJT-778.2C	DIODE
D3204	UDZSTE-1716B	S.M.T. ZENER DIODE
D3351	1SS355TE-17	DIODE
D3352	1SS355TE-17	DIODE
D3353	1SS355TE-17	DIODE
D3354	1SS355TE-17	DIODE
D3801	MA165TA5	DIODE
D3802	MA165TA5	DIODE
D3803	MTZJT-775.1B	DIODE
D3804	MA165TA5	DIODE
D3805	MA165TA5	DIODE
D3806	MA165TA5	DIODE
D3807	MA165TA5	DIODE
D3808	MA165TA5	DIODE
D3809	MA165TA5	DIODE
D3812	1SR124-4AT82	DIODE
D5101	MA8180MTX	DIODE
D5102	MA8180MTX	DIODE
D5201	HVU359TRF	DIODE
D5401	ERA81004V3	DIODE
D5402	ERA81004V3	DIODE
D5403	ERA81004V3	DIODE
D5404	ERA81004V3	DIODE
D5405	MA3X152K0L	3 TERM CHIP DIODE
D5801	RK34LFC4	DIODE
D5803	1SR124-4AT82	DIODE
D5812	RK34LFC4	DIODE
D5813	RK34LFC4	DIODE
D5814	MTZJT-7715B	DIODE
D5815	MTZJT-7715B	DIODE
D5816	1SR124-4AT82	DIODE
D5818	1SS355TE-17	DIODE
D5861	MA3X704A0L	3 TERM CHIP DIODE

Cct Ref	Parts Number	Description
D5862	MA3X704A0L	3 TERM CHIP DIODE
D5863	MA3X704A0L	3 TERM CHIP DIODE
D5864	MA3X152K0L	3 TERM CHIP DIODE
D5865	MA3X704A0L	3 TERM CHIP DIODE
Q5002	BF799	DIODE
Q5003	BF799	DIODE
TRANSISTORS		
Q101	BC847B	TRANSISTOR
Q102	BC847B	TRANSISTOR
Q103	BC857B	TRANSISTOR
Q108	BC857B	TRANSISTOR
Q251	2SD1328STX	TRANSISTOR
Q252	2SD1328STX	TRANSISTOR
Q253	BC847B	TRANSISTOR
Q254	BC847B	TRANSISTOR
Q351	2SA1767	TRANSISTOR
Q361	2SA1767	TRANSISTOR
Q371	2SA1767	TRANSISTOR
Q503	2SK2963TE12L	TRANSISTOR
Q521	2SK1006RF122	TRANSISTOR
Q522	2SC3311ATA	TRANSISTOR
Q523	2SC3311ATA	TRANSISTOR
Q524	2SC5460LB	TRANSISTOR
Q525	2SC3311ATA	TRANSISTOR
Q551	2SC5591000RK	TRANSISTOR
Q552	2SC1473ATA	TRANSISTOR
Q556	BC847B	TRANSISTOR
Q701	BC847B	TRANSISTOR
Q702	BC847B	TRANSISTOR
Q703	2SK2018-01S	TRANSISTOR
Q704	BC847B	TRANSISTOR
Q705	BC547B/126	TRANSISTOR
Q706	BC847B	TRANSISTOR
Q801	BC847B	TRANSISTOR
Q802	BC847B	TRANSISTOR
Q803	BC847B	TRANSISTOR
Q847	BC857B	TRANSISTOR
Q848	BC847B	TRANSISTOR
Q849	2SC3944ARLB	TRANSISTOR
Q852	BC857B	TRANSISTOR
Q853	BC847B	TRANSISTOR
Q893	2SA1018QTA	TRANSISTOR
Q894	BC847B	TRANSISTOR
Q895	BC847B	TRANSISTOR
Q896	BC857B	TRANSISTOR
Q897	2SA1534A-RTA	TRANSISTOR
Q898	BC557B/126	TRANSISTOR
Q899	BC857B	TRANSISTOR
Q905	BC847B	TRANSISTOR
Q906	BC847B	TRANSISTOR
Q907	BC857B	TRANSISTOR
Q908	2SA1535ARLB	TRANSISTOR
Q909	2SC3944ARLB	TRANSISTOR
Q1001	BC847B	TRANSISTOR
Q1002	BC847B	TRANSISTOR
Q1101	BC857B	TRANSISTOR
Q1102	BC847B	TRANSISTOR
Q1104	BC847B	TRANSISTOR
Q1105	BC847B	TRANSISTOR
Q1106	BC857B	TRANSISTOR
Q1108	BC847B	TRANSISTOR
Q1109	BC847B	TRANSISTOR
Q1110	BC847B	TRANSISTOR
Q1111	BC847B	TRANSISTOR
Q1112	BC847B	TRANSISTOR
Q1113	BC847B	TRANSISTOR

Cct Ref	Parts Number	Description
Q1115	BC847B	TRANSISTOR
Q1116	BC847B	TRANSISTOR
Q1125	BC847B	TRANSISTOR
Q1201	BC847B	TRANSISTOR
Q1202	BC857B	TRANSISTOR
Q1203	BC847B	TRANSISTOR
Q1501	BC847B	TRANSISTOR
Q1703	BC847B	TRANSISTOR
Q1704	BC847B	TRANSISTOR
Q1705	BC847B	TRANSISTOR
Q1706	FMY4AT148	TRANSISTOR
Q1707	FMY4AT148	TRANSISTOR
Q1708	FMY4AT148	TRANSISTOR
Q1712	BC847B	TRANSISTOR
Q1716	BC857B	TRANSISTOR
Q1771	BC857B	TRANSISTOR
Q1772	BC847B	TRANSISTOR
Q1773	BC847B	TRANSISTOR
Q1774	BC857B	TRANSISTOR
Q1775	BC857B	TRANSISTOR
Q1776	BC857B	TRANSISTOR
Q1781	BC857B	TRANSISTOR
Q1782	BC847B	TRANSISTOR
Q1783	BC857B	TRANSISTOR
Q1901	BC847B	TRANSISTOR
Q1902	BC847B	TRANSISTOR
Q1903	BC847B	TRANSISTOR
Q1904	BC847B	TRANSISTOR
Q1905	2SA1534A-RTA	TRANSISTOR
Q2001	BC857B	TRANSISTOR
Q2002	BC857B	TRANSISTOR
Q2003	BC857B	TRANSISTOR
Q2004	BC857B	TRANSISTOR
Q2005	BC857B	TRANSISTOR
Q2006	BC857B	TRANSISTOR
Q2351	BC847B	TRANSISTOR
Q2352	BC847B	TRANSISTOR
Q2353	BC857B	TRANSISTOR
Q2354	BC847B	TRANSISTOR
Q3000	BC847B	TRANSISTOR
Q3001	BC847B	TRANSISTOR
Q3003	BC847B	TRANSISTOR
Q3004	BC847B	TRANSISTOR
Q3005	BC857B	TRANSISTOR
Q3006	BC857B	TRANSISTOR
Q3007	BC847B	TRANSISTOR
Q3008	BC847B	TRANSISTOR
Q3009	BC847B	TRANSISTOR
Q3010	BC847B	TRANSISTOR
Q3011	BC847B	TRANSISTOR
Q3013	BC847B	TRANSISTOR
Q3014	BC847B	TRANSISTOR
Q3015	BC847B	TRANSISTOR
Q3016	BC847B	TRANSISTOR
Q3017	BC847B	TRANSISTOR
Q3018	BC847B	TRANSISTOR
Q3019	BC857B	TRANSISTOR
Q3352	BC857B	TRANSISTOR
Q3801	BC847B	TRANSISTOR
Q3802	2SD2396/KM1R	TRANSISTOR
Q3803	BC847B	TRANSISTOR
Q3804	BC847B	TRANSISTOR
Q5101	BC857B	TRANSISTOR
Q5102	BC857B	TRANSISTOR
Q5103	BC857B	TRANSISTOR
Q5104	BC857B	TRANSISTOR

Cct Ref	Parts Number	Description
Q5105	BC847B	TRANSISTOR
Q5106	BC847B	TRANSISTOR
Q5201	2N7002	MOSFET TRANSISTOR
Q5204	XN0640100L	TRANSISTOR
Q5205	BC847B	TRANSISTOR
Q5206	BC857B	TRANSISTOR
Q5401	BC847B	TRANSISTOR
Q5402	BC847B	TRANSISTOR
Q5403	BC847B	TRANSISTOR
Q5803	BC847B	TRANSISTOR
Q5804	BC847B	TRANSISTOR
Q5808	BC847B	TRANSISTOR
Q5809	BC857B	TRANSISTOR
Q5810	BC847B	TRANSISTOR
Q5811	BC847B	TRANSISTOR
Q5812	BC847B	TRANSISTOR
Q5861	BC847B	TRANSISTOR
Q5862	BC847B	TRANSISTOR
Q5863	BC847B	TRANSISTOR
Q5864	BC847B	TRANSISTOR
TRANSFORMERS		
T501	ETH19Y193AY	TRANSFORMER 
T701	ETF18L101A	TRANSFORMER 
T801	10756570	STANDBY TRANSFORMER 
T849	10724950	POWER TRANSFORMER 
COILS		
L105	TLTACT100K	COIL
L107	TLTACT101K	PEAKING COIL
L116	ELESN6R8KA	COIL
L381	TLT220K991R	COIL
L382	ELESN6R8KA	COIL
L557	EXCELD35C	COIL
L558	EXCELSA35B	COIL
L582	ELC10D561E	CHOKO COIL
L584	ELH5L7718	LINEARITY COIL
L701	ELC16B121L	CHOKO COIL
L704	ELC16B182L	CHOKO COIL
L804	ETQR42T005A	COIL
L852	ELEIE470KA	COIL
L892	ELEIE470KA	COIL
L893	EXCELSA35T	COIL
L894	EXCELSA35T	COIL
L895	EXCELSA35T	COIL
L896	EXCELSA35T	COIL
L897	EXCELSA35T	COIL
L898	EXCELSA35T	COIL
L899	EXCELSA35T	COIL
L910	EXCELSA35T	COIL
L911	EXCELSA35T	COIL
L912	EXCELSA35T	COIL
L1061	TLT331K991R	COIL
L1104	TALC325T4R7M	COIL
L1109	TALC325T4R7M	COIL
L1115	TALC168T8R2K	INDUCTOR
L1501	ELESN2R7KA	COIL
L1502	ELESN2R7KA	COIL
L1503	ELESN2R7KA	COIL
L1551	ELESN2R2KA	COIL
L1701	EXC3BB221H	COIL
L2001	ELESN4R7KA	COIL
L2004	ELESN101KA	COIL
L2005	ELESN4R7KA	COIL
L2202	ELESN2R2KA	COIL
L2222	ELESN2R2KA	COIL
L2351	EXCELD35V	COIL
L2352	EXCELD35V	COIL

Cct Ref	Parts Number	Description
L3001	ELESN1R5KA	COIL
L3003	ELESN1R5KA	COIL
L3005	ELESN1R5KA	COIL
L3007	ELESN1R5KA	COIL
L3009	ELESN1R5KA	COIL
L3011	ELESN1R5KA	COIL
L3015	EXCELD35V	COIL
L3016	EXCELD35V	COIL
L3078	ELESN2R2KA	COIL
L3201	ELEBR6R8KA	COIL
L3202	ELEBR6R8KA	COIL
L3203	EXCELSA35T	COIL
L3204	ELEBR6R8KA	COIL
L3205	ELEBR6R8KA	COIL
L3206	EXCELSA35T	COIL
L5001	EXCCL3225U1	EMI BEADCORE
L5002	EXCCL3225U1	EMI BEADCORE
L5003	EXCCL3225U1	EMI BEADCORE
L5005	ELJNAR82JF	S.M.T. COIL
L5008	EXCCL3225U1	EMI BEADCORE
L5009	EXCCL3225U1	EMI BEADCORE
L5010	EXCCL3225U1	EMI BEADCORE
L5011	ELJNAR82JF	S.M.T. COIL
L5106	ELJFA2R7JF	S.M.T. COIL
L5107	ELJFA2R7JF	S.M.T. COIL
L5108	ELJFA2R7JF	S.M.T. COIL
L5109	ELJFA2R7JF	S.M.T. COIL
L5203	ELJNA2R7JF	S.M.T. COIL
L5204	ELC10D121E	CHOKE COIL
L5205	EXCCET471U	EMI BEADCORE
L5207	EXCCET471U	EMI BEADCORE
L5208	EXCCET471U	EMI BEADCORE
L5209	EXCCET471U	EMI BEADCORE
L5210	EXCCET471U	EMI BEADCORE
L5211	EXCCET471U	EMI BEADCORE
L5213	EXCCET471U	EMI BEADCORE
L5215	EXCCET471U	EMI BEADCORE
L5217	EXCCET471U	EMI BEADCORE
L5218	EXCCET471U	EMI BEADCORE
L5301	ELESN220KA	COIL
L5351	EXCEMT103DTM	COIL
L5352	EXCEMT103DTM	COIL
L5354	EXCEMT103DTM	COIL
L5355	EXCEMT103DTM	COIL
L5356	TLK20LFA104M	INDUCTOR
L5357	EXCEMT103DTM	COIL
L5358	EXCEMT103DTM	COIL
L5800	ELC18B221L	COIL
L5821	TLPF095	COIL
L5861	EXCCET471U	EMI BEADCORE
LC1103	TLK212T256AL	COIL
LC1104	TLK212T256AL	COIL
LC1105	TLK212T256AL	COIL
LC1106	TLK212T256AL	COIL
LC1110	TLK212T256AL	COIL
LC1114	TLK212T256AL	COIL
LC1115	TLK212T256AL	COIL
LC1116	TLK212T256AL	COIL
LC1121	TLK212T256AL	COIL
LC1122	TLK212T256AL	COIL
LC1123	TLK212T256AL	COIL
LC1124	TLK212T256AL	COIL
LC1127	TLK212T256AL	COIL
LC1132	TLK212T256AL	COIL
LC1135	TLK212T256AL	COIL
LC1136	TLK212T256AL	COIL

Cct Ref	Parts Number	Description
LC1138	TLK212T256AL	COIL
LC1142	TLK212T256AL	COIL
LC1143	TLK212T256AL	COIL
LC1144	TLK212T256AL	COIL
LC1145	TLK212T256AL	COIL
LC1501	TLK212T256AL	COIL
LC1502	TLK212T256AL	COIL
LC1503	TLK212T256AL	COIL
LC1504	TLK212T256AL	COIL
LC1505	TLK212T256AL	COIL
LC1506	TLK212T256AL	COIL
LC1507	TLK212T256AL	COIL
LC1508	TLK212T256AL	COIL
LC1702	TLK212T256AL	COIL
LC1708	TLK212T256AL	COIL
LC1709	TLK212T256AL	COIL
LC1710	TLK212T256AL	COIL
LC1711	TLK212T256AL	COIL
LC1713	TLK212T256AL	COIL
T5802	ETQ19K66AY	CHOKE COIL
T5803	ETQ19K67AY	CHOKE COIL
FILTERS		
L801	ELF20N013A	LINE FILTER
L802	ELF20N013A	LINE FILTER
L5110	JOHAAC000011	EMI FILTER
L5111	JOHAAC000011	EMI FILTER
L5112	JOHAAC000011	EMI FILTER
L5113	JOHAAC000011	EMI FILTER
L5115	JOHAAC000011	EMI FILTER
L5116	JOHAAC000011	EMI FILTER
L5202	TAX10075	S.M.T. FILTER
L5206	JOHAAC000011	EMI FILTER
L5212	JOHAAC000011	EMI FILTER
L5601	ELKE103FA	FILTER
LC1107	ELKE103FA	FILTER
LC1109	ELKE103FA	FILTER
LC1117	ELKE103FA	FILTER
LC1120	ELKE103FA	FILTER
LC1129	ELKE103FA	FILTER
LC1130	ELKE103FA	FILTER
LC1131	ELKE103FA	FILTER
LC1140	ELKE103FA	FILTER
LC1147	ELKE103FA	FILTER
LC1152	ELKE103FA	FILTER
LC1153	ELKE103FA	FILTER
LC1154	ELKE103FA	FILTER
LC1155	ELKE103FA	FILTER
LC1156	ELKE103FA	FILTER
LC1157	ELKE103FA	FILTER
LC1701	ELKE103FA	FILTER
LC1703	ELKE103FA	FILTER
LC1704	ELKE103FA	FILTER
LC1705	ELKE103FA	FILTER
LC1706	ELKE103FA	FILTER
LC1707	ELKE103FA	FILTER
X5001	X6874D100	SAW FILTER
X5002	X6874D100	SAW FILTER
CRYSTALS		
X1101	H0J600400006	CRYSTAL
X1501	A1202504E	CRYSTAL
X1701	4730007690	CRYSTAL
X2001	4730007158	CRYSTAL
X5003	4730007705	CRYSTAL
X5201	H0A327600001	CRYSTAL
X5202	H0D270500005	CRYSTAL

Cct Ref	Parts Number	Description				
RESISTORS						
C143	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
C1105	F1J1A1050020		AP P/		Ω	
C1110	F1J1A1050020		AP P/		Ω	
C1171	F1J1A1050020		AP P/		Ω	
C1501	F1J1A1050020		AP P/		Ω	
C1502	F1J1A1050020		AP P/		Ω	
C1503	F1J1A1050020		AP P/		Ω	
C1504	F1J1A1050020		AP P/		Ω	
C1505	F1J1A1050020		AP P/		Ω	
C1617	F1J1A1050020		AP P/		Ω	
C1618	F1J1A1050020		AP P/		Ω	
C1619	F1J1A1050020		AP P/		Ω	
C1620	F1J1A1050020		AP P/		Ω	
C1621	F1J1A1050020		AP P/		Ω	
D911	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA1	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA2	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA3	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA4	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA5	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA6	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA7	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA7	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA8	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA9	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA10	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA11	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA12	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA13	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA14	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA15	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA15	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JA16	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA17	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JA18	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA05	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA07	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA08	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA013	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA16	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA17	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA19	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA022	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSA023	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSA30	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA033	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
JSA034	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA037	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA038	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSD010	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSD017	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSD023	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSD024	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSD035	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSG017	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSG018	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSG031	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH11	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH12	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH13	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH15	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSL4	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSXT01	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ2	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ4	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	

Cct Ref	Parts Number	Description				
JSZ5	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ6	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ7	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ8	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ10	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ11	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ13	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ14	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ15	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ16	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ17	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ30	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ32	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ33	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ35	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ36	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ49	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
L5350	EXCEMT220BTS	RESISTOR			22 Ω	
L5353	EXCEMT102BTS	RESISTOR			1K Ω	
LC1512	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R111	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R112	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R113	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R114	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R115	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R116	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R117	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R118	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	
R120	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R121	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R122	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R129	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R130	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R134	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R135	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R136	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R137	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R138	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	
R250	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R251	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R252	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R253	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R254	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R255	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R256	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R257	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω	
R258	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω	
R259	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R260	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R261	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R262	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R263	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω	
R264	ERD25TJ2R2	CARBON	0.25W	5%	2R2 Ω	
R265	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R266	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R267	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R268	ERQ14AJ101	METAL	0.25W	5%	100 Ω	⚠
R269	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R350	ERQ12AJ151P	FUSIBLE	0.5W	5%	150 Ω	⚠
R352	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω	
R355	ERG1SJ823	METAL	1W	5%	820 Ω	
R356	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R358	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R361	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R362	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω	
R365	ERG1SJ823	METAL	1W	5%	820 Ω	

Cct Ref	Parts Number	Description				
R366	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R368	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R370	ERQ2CJP1R0	FUSIBLE	2W	5%	1 Ω	
R372	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω	
R375	ERG1SJ823	METAL	1W	5%	820 Ω	
R376	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω	
R378	ERDS1TJ821	CARBON	0.5W	5%	820 Ω	
R380	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R381	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω	
R382	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R383	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R391	ERD25TJ274	CARBON	0.25W	5%	270K Ω	
R392	ERJ6GEYJ684	S.M.CARB	0.1W	5%	680K Ω	
R394	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R396	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R398	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R451	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R453	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
R454	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R455	ERDS2TJ223T	CARBON	2W	5%	22K Ω	
R458	ERDS1TJ1R0	CARBON	0.5W	5%	1 Ω	
R460	ERG3SJS151	METAL	3W	5%	150 Ω	
R461	ERX2SJS1R0H	METAL	2W	5%	1R0 Ω	
R463	ERJ6GEYJ751	S.M.CARB	0.1W	5%	750 Ω	
R464	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	
R465	ERJ6GEYJ911	S.M.CARB	0.1W	5%	910 Ω	
R467	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R501	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R503	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R507	ERG2FJ101H	METAL	2W	5%	100 Ω	△
R509	ERG1SJ222E	METAL	0.5W	5%	2K2 Ω	
R510	ERG1SJ222E	METAL	0.5W	5%	2K2 Ω	
R520	ERD25TJ153	CARBON	0.25W	5%	15K Ω	
R521	ERG2FJS123	METAL	2W	5%	12K Ω	
R522	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R523	ERD25TJ103	CARBON	0.25W	5%	10K Ω	
R524	ERD25TJ103	CARBON	0.25W	5%	10K Ω	
R525	ERD25TJ102	CARBON	0.25W	5%	1K Ω	
R526	ERC14GK184	SOLID	0.25W	5%	180K Ω	
R527	ERC14GK224	SOLID	1/4W	5%	220K Ω	△
R530	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R531	ERC14GK334	SOLID	0.25W	10%	330K Ω	
R532	ERD25TJ473	CARBON	0.25W	5%	47K Ω	
R533	ERG3FJS821	METAL	3W	5%	820 Ω	
R534	ERDS2TJ333T	CARBON	2W	5%	33K Ω	
R535	ERG1FJS332	METAL	1W	5%	3R3K Ω	
R536	ERG3FJS821	METAL	3W	5%	820 Ω	
R538	ERC14GK225	SOLID	1/4W	5%	2.2M Ω	
R540	ERD25TJ560	CARBON	0.25W	5%	56 Ω	
R553	ERX3SJSR22	METAL	3W	5%	R22 Ω	△
R555	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R556	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R557	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R558	ERDS1TJ124	CARBON	0.5W	5%	120K Ω	
R559	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R560	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω	
R561	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R562	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R564	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	
R566	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R567	343-23R3AY	RESISTOR			Ω	
R568	ERDS1TJ120	CARBON	0.5W	5%	12 Ω	
R569	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R578	ERQ12HJR39	FUSIBLE	0.5W	5%	R39 Ω	
R581	ERG3FJ561H	METAL	2W	5%	560 Ω	
R584	ERJ6GEYJ394	S.M.CARB	0.1W	5%	390K Ω	

Cct Ref	Parts Number	Description				
R701	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R702	ERX2SJS2R7H	METAL	2W	5%	2R7 Ω	
R704	ERDS1FJ472	CARBON	0.5W	5%	4.7K Ω	
R705	ERG3FJ221	METAL	3W	5%	220 Ω	
R706	ERG3FJ221	METAL	3W	5%	220 Ω	
R707	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R708	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R709	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R711	ERDS1TJ133	CARBON	0.5W	5%	13K Ω	
R712	ERJ6GEYJ203	S.M.CARB	0.1W	5%	20K Ω	
R715	ERD25TJ272F	CARBON	0.25W	5%	2K7 Ω	
R716	ERQ12AJ680P	METAL	0.5W	5%	68 Ω	△
R717	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R718	ERJ6GEYJ203	S.M.CARB	0.1W	5%	20K Ω	
R720	ERJ6GEYJ302	S.M.CARB	0.1W	5%	3K Ω	
R721	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω	
R722	ERJ6GEYJ242	S.M.CARB	0.1W	5%	2K4 Ω	
R723	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R724	ERG2FJ680H	METAL	2W	5%	68 Ω	△
R725	ERG1FJ202	METAL	0.5W	5%	2K Ω	
R801	ERC12ZGK105C	SOLID	0.5W	10%	1M Ω	△
R802	ERC12ZGK335D	SOLID	0.5W	10%	3M3 Ω	△
R802	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R803	ERJ6GEYJ202	S.M.CARB	0.1W	5%	2K Ω	
R804	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω	△
R805	ERG1SJ221P	METAL	1W	5%	220 Ω	△
R806	ERJ6GEYJ243	S.M.CARB	0.1W	5%	24K Ω	
R807	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R808	ERG1SJ271	METAL	1W	5%	270 Ω	
R810	ERG2SJS753	METAL	2W	5%	75K Ω	
R811	ERW2PK1R0	WOUND	2W	10%	1R0 Ω	
R812	ERW2PK1R0	WOUND	2W	10%	1R0 Ω	
R813	ERDS1TJ101	CARBON	0.5W	5%	100 Ω	
R814	ERDS1TJ100	CARBON	0.5W	5%	10 Ω	
R815	ERDS1TJ203	CARBON	0.5W	5%	20K Ω	
R818	ERDS1TJ432	CARBON	0.5W	5%	4.3K Ω	
R819	ERDS1TJ684	CARBON	0.5W	5%	680K Ω	
R820	ERD25TJ275	CARBON	0.25W	5%	2.7M Ω	
R821	ERG2FJ470H	METAL	2W	5%	47 Ω	△
R822	ERDS1TJ152	CARBON	0.5W	5%	1K5 Ω	
R823	ERDS1TJ101	CARBON	0.5W	5%	100 Ω	
R824	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R825	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R826	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R827	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R828	ERDS2TJ512T	CARBON	2W	5%	5K1 Ω	
R835	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R836	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω	△
R837	ERD25TJ100	CARBON	0.25W	5%	10 Ω	
R838	ERDS2TJ332T	CARBON	2W	5%	3K2 Ω	
R839	ERD25TJ202	CARBON	0.25W	5%	2K Ω	
R841	ERD25TJ681	CARBON	0.25W	5%	680 Ω	
R842	ERW2PKR15	WOUND	2W	10%	R15 Ω	
R843	ERW2PKR15	WOUND	2W	10%	R15 Ω	
R844	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	
R845	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R847	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R851	ERO25CKF7500	METAL	0.25W	1%	750 Ω	
R852	ERO25CKF5101	RESISTOR	0.25W	1%	5.1K Ω	
R853	ERDS1TJ102	CARBON	0.5W	5%	1K Ω	
R854	ERO25CKF1800	METAL	0.25W	1%	180 Ω	
R855	ERDS1TJ332	CARBON	0.5W	5%	3K3 Ω	
R859	ERDS1TJ152	CARBON	0.5W	5%	1K5 Ω	
R860	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω	
R861	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R862	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	

Cct Ref	Parts Number	Description			
R863	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R864	ERJ6GEYJ332	S.M.CARB	0.1W	5%	330 Ω
R865	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R877	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R879	ERG1SJ223	METAL	1W	5%	22K Ω
R880	ERG1SJ183	METAL	1W	5%	18K Ω
R881	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R882	ERD25TJ681	CARBON	0.25W	5%	680 Ω
R883	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R884	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R885	ERJ6GEYJ753	S.M.CARB	0.1W	5%	75K Ω
R886	ERG3FJ101	METAL	3W	5%	100 Ω ▲
R887	ERDS1TJ683	CARBON	0.5W	5%	68K Ω
R888	ERG3FJ101	METAL	3W	5%	100 Ω ▲
R889	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R890	ERD25TJ202	CARBON	0.25W	5%	2K Ω
R892	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R893	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω
R894	ERDS1TJ2R2	CARBON	0.5W	5%	2R2 Ω
R895	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R896	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R897	ERJ6GEYJ361	S.M.CARB	0.1W	5%	360 Ω
R898	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R913	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R914	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R915	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R916	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R918	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R921	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R922	ERDS2TJ683T	CARBON	2W	5%	68K Ω
R923	ERDS2TJ683T	CARBON	2W	5%	68K Ω
R924	ERD25TJ750	CARBON	0.25W	5%	75 Ω
R925	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R926	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R927	ERD25TJ122	CARBON	0.25W	5%	1K2 Ω
R928	ERD25TJ5R6	CARBON	0.25W	5%	5R6 Ω
R929	ERDS1FVJ471	CARBON	0.5W	5%	470 Ω ▲
R931	ERD25TJ750	CARBON	0.25W	5%	75 Ω
R935	ERQ14AJW3R9	FUSIBLE	0.25W	5%	3R9 Ω ▲
R936	ERQ1CJP102	FUSIBLE	1W	5%	1K Ω ▲
R937	ERQ14AJW100	FUSIBLE	0.25W	5%	10 Ω ▲
R938	ERD25TJ122	CARBON	0.25W	5%	1K2 Ω
R941	ERD25TJ5R6	CARBON	0.25W	5%	5R6 Ω
R1002	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R1004	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180 Ω
R1005	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R1007	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1017	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1043	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R1044	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R1045	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R1046	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R1047	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R1101	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1102	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1103	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1104	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1105	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1106	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1107	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1108	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1109	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1110	ERJ3GEYJ272	S.M.CARB	0.125	5%	2K7 Ω
R1111	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1112	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1113	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω

Cct Ref	Parts Number	Description			
R1114	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1115	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1116	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω
R1117	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1118	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1119	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1120	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1121	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1122	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1123	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1124	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1125	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1126	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1127	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1128	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1129	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1131	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1132	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1133	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1134	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1135	ERJ3GEYJ224V	S.M.CARB	0.16W	5%	220 Ω
R1136	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1137	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R1138	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1139	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R1140	ERJ3GEYJ225	S.M.CARB	0.33W	5%	2.2M Ω
R1141	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1142	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1144	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1145	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω
R1146	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1147	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1148	ERJ3GEYJ273	S.M.CARB	0.125	5%	27K Ω
R1149	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1150	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1151	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1152	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1153	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1154	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R1155	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1157	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1158	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1160	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1161	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1162	ERJ3GEYJ123	S.M.CARB	0.33W	5%	12K Ω
R1166	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1167	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R1168	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1169	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1170	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1171	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω
R1172	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1177	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1180	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1181	ERJ3GEYJ683	S.M.CARB	0.33W	5%	68K Ω
R1182	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1183	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1184	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1186	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1187	ERJ3GEYJ683	S.M.CARB	0.33W	5%	68K Ω
R1188	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1189	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1190	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1191	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1192	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1193	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω



Cct Ref	Parts Number	Description			
R1194	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω
R1195	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1196	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1197	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1199	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1200	ERD25TJ473	CARBON	0.25W	5%	47K Ω
R1201	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1202	EXB38V390JV	CHIP ARR	3W	5%	39 Ω
R1205	EXB38V390JV	CHIP ARR	3W	5%	39 Ω
R1209	EXB38V390JV	CHIP ARR	3W	5%	39 Ω
R1210	ERJ3GEYJ224V	S.M.CARB	0.16W	5%	220 Ω
R1211	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1212	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1214	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1217	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1221	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1222	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1225	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1226	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1227	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1228	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1229	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1230	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R1231	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2 Ω
R1232	EXB38V390JV	CHIP ARR	3W	5%	39 Ω
R1233	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1234	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1235	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R1236	EXB38V680JV	CHIP	0.063	5%	680 Ω ▲
R1248	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1249	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1251	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1255	ERJ3GEYJ392V	S.M.CARB	0.125	5%	3.9K Ω
R1257	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1258	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω
R1264	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R1501	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R1502	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R1503	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R1507	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1508	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1509	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1510	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1512	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1513	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R1514	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1515	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1551	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1552	ERJ3GEYJ750	S.M.CARB	0.33W	5%	75 Ω
R1553	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1554	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1555	ERJ3GEYJ750	S.M.CARB	0.33W	5%	75 Ω
R1556	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1561	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R1562	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R1563	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R1570	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1571	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1572	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1573	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1574	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1601	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1602	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1603	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1612	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1614	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω

Cct Ref	Parts Number	Description			
R1615	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1701	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1704	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1708	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1709	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1710	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1712	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1713	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1714	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1716	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1717	ERJ3GEYJ271V	S.M.CARB	0.33W	5%	270 Ω
R1718	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω
R1719	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1720	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R1721	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R1722	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R1724	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R1725	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R1726	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R1727	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1728	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1729	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1732	ERJ3GEYJ271V	S.M.CARB	0.33W	5%	270 Ω
R1733	ERJ3GEYJ271V	S.M.CARB	0.33W	5%	270 Ω
R1734	ERJ3GEYJ271V	S.M.CARB	0.33W	5%	270 Ω
R1735	ERJ3GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R1736	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1737	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R1738	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R1739	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1740	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R1741	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R1742	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1743	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R1744	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R1746	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1747	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1748	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R1749	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1750	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R1751	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R1752	ERJ6GEYJ150	S.M.CARB	0.1W	5%	15 Ω
R1755	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1756	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R1758	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1759	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R1761	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R1762	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R1763	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R1770	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω
R1772	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1773	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1774	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1775	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1776	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R1777	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1778	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1779	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1780	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1781	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1782	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R1783	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1784	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω
R1785	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1786	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1787	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω

Cct Ref	Parts Number	Description			
R1788	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1789	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1791	ERJ3GEYJ752V	CERAMIC	0.33W	5%	7.5K Ω
R1792	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R1793	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1901	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1902	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1903	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1904	ERDS1TJ2R2	CARBON	0.5W	5%	2R2 Ω
R1905	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1906	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1907	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R1908	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1909	ERDS1TJ2R2	CARBON	0.5W	5%	2R2 Ω
R1912	ERDS1TJ331	CARBON	0.5W	5%	330 Ω
R1913	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1914	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R1915	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R1916	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1917	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1918	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120 Ω
R1919	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R1920	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1921	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R1923	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R1925	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R1926	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2001	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2002	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2011	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2012	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2013	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2014	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2015	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2016	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2021	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2022	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R2023	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2024	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2025	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2026	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2027	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2028	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2029	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2030	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2031	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2032	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2033	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2034	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2035	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2036	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2037	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2038	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2200	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2201	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R2203	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2204	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R2206	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R2207	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R2208	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R2209	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R2210	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2211	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R2212	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R2213	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2214	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω

Cct Ref	Parts Number	Description			
R2215	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2216	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2217	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
R2218	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R2219	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2220	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R2221	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R2223	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2224	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R2226	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
R2227	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R2228	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2229	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R2230	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R2231	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2232	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2235	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2236	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2237	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2241	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2242	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2243	ERDS1TJ220	CARBON	0.5W	5%	22 Ω
R2351	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2352	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2353	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R2354	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2355	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R2356	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2357	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2358	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R2359	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R2360	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2361	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2362	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R2363	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2364	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R2365	ERDS1FJ390	CARBON	0.5W	5%	39 Ω
R2366	ERDS1FJ390	CARBON	0.5W	5%	39 Ω
R2367	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2368	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2369	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R2370	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R3001	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R3002	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R3003	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R3004	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3005	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3006	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3007	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3008	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3009	ERJ6ENF1802	S.M.CARB	0.1W	1%	1K8 Ω
R3010	ERJ6ENF9101	S.M.CARB	0.1W	1%	9.1K Ω
R3011	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3012	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3013	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3014	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3015	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3016	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3017	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3018	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3019	ERJ6ENF1802	S.M.CARB	0.1W	1%	1K8 Ω
R3020	ERJ6ENF9101	S.M.CARB	0.1W	1%	9.1K Ω
R3021	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3022	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R3023	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω
R3024	ERJ6ENF82R0	S.M.CARB	0.1W	1%	82 Ω

Cct Ref	Parts Number	Description			
R3025	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3026	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3028	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3029	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3031	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R3032	ERJ6ENF1802	S.M.CARB	0.1W	1%	1K8 Ω
R3033	ERJ6ENF9101	S.M.CARB	0.1W	1%	9.1K Ω
R3034	ERJ3GEYJ391	S.M.CARB	0.125	5%	390 Ω
R3035	ERJ3GEYJ391	S.M.CARB	0.125	5%	390 Ω
R3036	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3037	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R3038	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3039	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R3040	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3041	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3042	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3043	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3044	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3047	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3048	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3051	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3052	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R3053	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3054	ERJ3GEYJ562V	S.M.CARB	0.125	5%	5.6K Ω
R3055	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3056	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3057	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3059	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3061	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3062	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3064	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3065	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3066	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3067	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3069	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3074	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3075	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3084	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3085	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3088	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3089	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3091	ERJ3GEYJ750	S.M.CARB	0.33W	5%	75 Ω
R3092	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3094	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3095	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3096	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3097	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R3105	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω
R3106	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R3107	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3108	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3109	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3110	ERJ3GEYJ123	S.M.CARB	0.33W	5%	12K Ω
R3111	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R3112	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3114	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3115	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3116	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3117	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3118	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3119	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3120	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R3121	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3122	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3123	ERJ3GEYJ474	S.M.CARB	0.33W	5%	470K Ω
R3124	ERJ3GEYJ474	S.M.CARB	0.33W	5%	470K Ω

Cct Ref	Parts Number	Description			
R3125	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3126	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3127	ERJ3GEYJ474	S.M.CARB	0.33W	5%	470K Ω
R3128	ERJ3GEYJ474	S.M.CARB	0.33W	5%	470K Ω
R3201	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3202	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3203	ERDS1TJ151	CARBON	0.5W	5%	150 Ω
R3208	ERDS1TJ151	CARBON	0.5W	5%	150 Ω
R3212	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3213	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3214	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3215	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω
R3301	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3303	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3355	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R3356	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R3357	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R3358	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω
R3362	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3363	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3364	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3801	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R3802	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R3803	ERDS1TJ751	CARBON	0.5W	5%	750 Ω
R3804	ERJ8GEYJ822	S.M.CARB	0.125	5%	8.2K Ω
R3805	ERG2SJS270	METAL	2W	5%	27 Ω
R3807	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R3808	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R3810	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R3811	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R3812	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5004	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5007	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5008	ERJ3GEYJ100	S.M.CARB	0.33W	5%	10 Ω
R5009	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5010	ERJ3GEYJ100	S.M.CARB	0.33W	5%	10 Ω
R5011	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5012	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5017	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R5018	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R5019	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5020	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R5027	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R5028	ERJ3GEYJ561V	S.M.CARB	0.125	5%	560 Ω
R5029	ERJ3GEYJ122V	S.M.CARB	0.33W	5%	1.2K Ω
R5031	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R5032	ERJ3GEYJ123	S.M.CARB	0.33W	5%	12K Ω
R5033	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R5034	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω
R5035	ERJ3GEYJ362	S.M.CARB	0.33W	5%	3.6K Ω
R5036	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R5038	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R5039	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R5041	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5042	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5043	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5044	ERJ3GEYJ106	S.M.CARB	0.33W	5%	10M Ω
R5045	ERJ3GEYJ822	S.M.CARB	0.33W	5%	8.2K Ω
R5047	ERJ12Y0R00	S.M.CARB	0.5W	1%	0 Ω 
R5048	ERJ12Y0R00	S.M.CARB	0.5W	1%	0 Ω 
R5049	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5050	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5051	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5052	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5055	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω

Cct Ref	Parts Number	Description				
R5101	ERJ3GEYF181	S.M.CARB	0.33W	1%	180 Ω	
R5102	ERJ3GEYF561	S.M.CARB	0.33W	1%	560 Ω	
R5103	ERJ3GEYF561	S.M.CARB	0.33W	1%	560 Ω	
R5104	ERJ3GEYF561	S.M.CARB	0.33W	1%	560 Ω	
R5107	ERJ3GEYF272	S.M.CARB	0.33W	1%	2.7K Ω	
R5108	ERJ3GEYF272	S.M.CARB	0.33W	1%	2.7K Ω	
R5109	ERJ3GEYF272	S.M.CARB	0.33W	1%	2.7K Ω	
R5110	ERJ3GEYF272	S.M.CARB	0.33W	1%	2.7K Ω	
R5111	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5112	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5113	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5114	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5116	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5117	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R5118	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R5119	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R5120	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R5121	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5122	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5123	ERX1FJS2R7	METAL	1W	5%	2.7 Ω	
R5124	ERJ3GEYJ563V	S.M.CARB	0.125	5%	56K Ω	
R5125	ERJ3GEYJ563V	S.M.CARB	0.125	5%	56K Ω	
R5126	ERJ3GEYJ563V	S.M.CARB	0.125	5%	56K Ω	
R5127	ERJ3GEYJ563V	S.M.CARB	0.125	5%	56K Ω	
R5128	ERJ3GEYF153	S.M.CARB	0.33W	1%	15K Ω	
R5129	ERJ3GEYF153	S.M.CARB	0.33W	1%	15K Ω	
R5130	ERJ3GEYF153	S.M.CARB	0.33W	1%	15K Ω	
R5131	ERJ3GEYF153	S.M.CARB	0.33W	1%	15K Ω	
R5132	ERJ3GEYF103	S.M.CARB	0.33W	1%	10K Ω	
R5133	ERJ3GEYJ123	S.M.CARB	0.33W	5%	12K Ω	
R5134	ERJ3GEYF103	S.M.CARB	0.33W	1%	10K Ω	
R5135	ERJ3GEYJ123	S.M.CARB	0.33W	5%	12K Ω	
R5136	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5137	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω	
R5138	ERJ3GEYJ181	S.M.CARB	0.125	5%	180 Ω	
R5139	ERJ3GEYJ181	S.M.CARB	0.125	5%	180 Ω	
R5140	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω	
R5141	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω	
R5142	ERJ14YJ471	S.M.CARB	0.25W	1%	470 Ω	
R5143	ERJ14YJ471	S.M.CARB	0.25W	1%	470 Ω	
R5144	ERJ3GEYF430	S.M.CARB	0.33W	1%	43 Ω	
R5145	ERJ3GEYF390	S.M.CARB	0.33W	1%	39 Ω	
R5146	ERJ3GEYF390	S.M.CARB	0.33W	1%	39 Ω	
R5147	ERJ3GEYF390	S.M.CARB	0.33W	1%	39 Ω	
R5201	EXB38V820JV	CHIP ARR	3W	5%	82 Ω	
R5202	EXB38V820JV	CHIP ARR	3W	5%	82 Ω	
R5203	ERJ3GEYJ820	S.M.CARB	0.33W	5%	82 Ω	
R5204	ERJ3GEYJ820	S.M.CARB	0.33W	5%	82 Ω	
R5205	ERJ3GEYJ820	S.M.CARB	0.33W	5%	82 Ω	
R5206	ERJ3GEYJ820	S.M.CARB	0.33W	5%	82 Ω	
R5207	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5208	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5209	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5210	EXB38V103JV	CHIP ARR	3W	5%	10K Ω	
R5211	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5212	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5213	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5214	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5215	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5216	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5217	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5218	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5219	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5226	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5227	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5228	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	

Cct Ref	Parts Number	Description				
R5229	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5230	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5231	EXB38V222JV	CHIP ARR	3W	5%	2.2K Ω	
R5232	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω	
R5236	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω	
R5237	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω	
R5239	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5240	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5241	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5244	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5245	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5246	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω	
R5247	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5248	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5249	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5250	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5251	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5252	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5253	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5254	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5255	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5256	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5257	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5258	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5259	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5262	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5263	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5264	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5265	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5266	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5267	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5269	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5270	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5271	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5272	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω	
R5273	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
R5274	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω	
R5275	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5276	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5277	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5278	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5279	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5280	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5281	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5282	ERJ3GEYJ121	S.M.CARB	0.1W	5%	120 Ω	
R5283	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5284	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5285	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5286	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5287	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5288	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5289	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5290	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5291	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω	
R5292	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5293	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω	
R5294	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω	
R5295	ERJ3GEYJ105	S.M.CARB	0.33W	5%	1M Ω	
R5296	ERJ3GEYJ332	S.M.CARB	0.125	5%	3.3K Ω	
R5297	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5298	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5300	ERJ3GEYJ331	S.M.CARB	0.125	5%	330 Ω	
R5301	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5302	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5304	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5305	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	

Cct Ref	Parts Number	Description				
R5306	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5308	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω	
R5311	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5312	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5313	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5314	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5315	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5316	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5317	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5318	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5319	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5320	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5321	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5322	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5323	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5324	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5325	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5326	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5327	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5328	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5329	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5330	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5331	EXB38V680JV	CHIP	0.063	5%	680 Ω	△
R5333	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5334	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5335	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5336	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5337	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5338	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5339	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5340	ERJ3GEYJ680	S.M.CARB	0.33W	5%	68 Ω	
R5341	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5342	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5343	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5344	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5345	ERJ3GEYF392	S.M.CARB	0.33W	1%	3.9K Ω	
R5346	ERJ3GEYF272	S.M.CARB	0.33W	1%	2.7K Ω	
R5349	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5350	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5353	ERJ3GEYF750	S.M.CARB	0.33W	1%	75 Ω	
R5354	ERJ3GEYF331	S.M.CARB	0.33W	1%	330 Ω	
R5355	ERJ3GEYF750	S.M.CARB	0.33W	1%	75 Ω	
R5356	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5357	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5358	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5359	ERJ3GEYF750	S.M.CARB	0.33W	1%	75 Ω	
R5360	ERJ3GEYF123	S.M.CARB	0.33W	1%	12K Ω	
R5361	ERJ3GEYF331	S.M.CARB	0.33W	1%	330 Ω	
R5362	ERJ3GEYF750	S.M.CARB	0.33W	1%	75 Ω	
R5366	ERJ3GEYF123	S.M.CARB	0.33W	1%	12K Ω	
R5367	ERJ3GEYF682	S.M.CARB	0.33W	1%	6.8K Ω	
R5370	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5371	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5372	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5373	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5374	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5375	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5376	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5377	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5378	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5379	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5380	ERJ3GEYJ121	S.M.CARB	0.1W	5%	120 Ω	
R5381	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5382	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5383	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5384	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	

Cct Ref	Parts Number	Description				
R5385	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5386	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5387	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5388	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5389	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R5390	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5391	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R5392	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R5394	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5396	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5397	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5398	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5399	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5401	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5403	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5404	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5405	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5406	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5407	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5408	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5409	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5410	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R5411	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5412	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5413	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5414	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5415	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5416	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5418	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5419	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5420	EXB38V273JV	CHIP ARR	3W	5%	27K Ω	
R5421	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5422	EXB38V220JV	CHIP ARR	3W	5%	22 Ω	
R5423	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5424	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5426	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R5428	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5429	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5430	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5431	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5432	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5433	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω	
R5434	ERG1SJ270	METAL	0.5W	5%	27 Ω	
R5435	ERG1SJ270	METAL	0.5W	5%	27 Ω	
R5436	ERG1SJ270	METAL	0.5W	5%	27 Ω	
R5437	ERG1SJ270	METAL	0.5W	5%	27 Ω	
R5438	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5439	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5440	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5441	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5442	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5443	EXB38V560JV	CHIP ARR	3W	5%	56 Ω	
R5444	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5445	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5446	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω	
R5447	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω	
R5448	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω	
R5449	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5450	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R5451	EXB38V104JV	CHIP ARR	3W	5%	100K Ω	
R5452	EXB38V104JV	CHIP ARR	3W	5%	100K Ω	
R5453	EXB38V104JV	CHIP ARR	3W	5%	100K Ω	
R5454	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω	
R5455	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω	
R5456	EXB38V470JV	CHIP ARR	3W	5%	47 Ω	
R5457	EXB38V470JV	CHIP ARR	3W	5%	47 Ω	

Cct Ref	Parts Number	Description			
R5458	EXB38V470JV	CHIP ARR	3W	5%	47 Ω
R5459	EXB38V470JV	CHIP ARR	3W	5%	47 Ω
R5460	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5461	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5462	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5463	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5464	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5465	ERJ3GEYJ470V	S.M.CARB	0.125	5%	47 Ω
R5466	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5467	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5468	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5469	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5470	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5471	EXB38V560JV	CHIP ARR	3W	5%	56 Ω
R5472	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5473	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5474	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5475	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω
R5476	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R5477	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5478	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5479	EXB38V104JV	CHIP ARR	3W	5%	100K Ω
R5480	EXB38V104JV	CHIP ARR	3W	5%	100K Ω
R5481	EXB38V104JV	CHIP ARR	3W	5%	100K Ω
R5482	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5483	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5484	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5485	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5486	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5487	EXB38V220JV	CHIP ARR	3W	5%	22 Ω
R5488	EXB38V220JV	CHIP ARR	3W	5%	22 Ω
R5489	EXB38V220JV	CHIP ARR	3W	5%	22 Ω
R5490	EXB38V220JV	CHIP ARR	3W	5%	22 Ω
R5491	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5492	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5493	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5494	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5495	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5496	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω
R5497	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5498	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5499	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5506	ERJ3GEYJ472V	S.M.CARB	0.125	5%	47K Ω
R5507	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω
R5508	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5509	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R5510	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5511	EXB38VR000V	CHIP ARR	3W	0%	0 Ω
R5512	EXB38VR000V	CHIP ARR	3W	0%	0 Ω
R5513	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5514	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5515	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5516	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5517	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5518	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5519	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5520	EXB38V473JV	CHIP ARR	3W	5%	47K Ω
R5521	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R5522	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R5523	ERJ3GEYJ681V	S.M.CARB	0.33W	5%	680 Ω
R5524	ERJ3GEYJ152	S.M.CARB	0.1W	5%	150K Ω
R5604	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R5707	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5740	ERJ8GEY0R00	S.M.CARB	.125W	5%	0 Ω
R5800	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5801	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω

Cct Ref	Parts Number	Description			
R5802	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5803	ERJ6ENF1001	S.M.CARB	0.1W	1%	1K Ω
R5804	ERJ6ENF1001	S.M.CARB	0.1W	1%	1K Ω
R5805	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5806	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5807	ERW2PKR22	WOUND	2W	5%	22 Ω
R5808	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R5809	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω
R5810	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω
R5811	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R5812	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5813	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5818	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω
R5819	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R5820	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5821	ERG2FJ680H	METAL	2W	5%	68 Ω
R5822	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R5823	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5824	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R5825	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R5832	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R5833	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5862	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5863	ERJ3GEYJ682V	S.M.CARB	0.125	5%	6.8K Ω
R5864	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5866	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5867	ERJ3GEYJ222	S.M.CARB	0.125	5%	2K2 Ω
R5868	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5869	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5870	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5871	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5872	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R5873	ERJ3GEYJ472V	S.M.CARB	0.125	5%	4.7K Ω
R5874	ERJ3GEYJ471V	S.M.CARB	0.125	5%	470 Ω
R5875	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5876	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5877	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5878	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5879	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R5880	ERJ3GEYJ473V	S.M.CARB	0.125	5%	47K Ω
R5890	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5891	ERJ3GEYF102	S.M.CARB	0.33W	1%	1K Ω
R5892	ERJ3GEYF102	S.M.CARB	0.33W	1%	1K Ω
R5893	ERJ3GEYJ224V	S.M.CARB	0.16W	5%	220 Ω
R5901	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R5902	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5951	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5952	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R5980	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5981	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
R5982	ERJ3GEYJ560	S.M.CARB	0.33W	5%	56 Ω
CAPACITORS					
C107	ECJ2VF1H104Z	CERAMIC	50V		100nF
C108	ECA1CM100GB	ELECT	16V		10μF
C114	ECJ2VF1H104Z	CERAMIC	50V		100nF
C115	ECJ2VB1H103K	CERAMIC	50V		10nF
C116	ECA1CM221GB	ELECT	16V		220μF
C117	ECJ2VB1H103K	CERAMIC	50V		10nF
C118	ECJ2VF1H104Z	CERAMIC	50V		100nF
C119	ECA1CM221GB	ELECT	16V		220μF
C122	ECJ2FB1H104	CERAMIC	50V		100nF
C137	ECJ2VC1H100D	ELECT	50V		10μF
C138	ECJ2VC1H220J	CERAMIC	50V		22pF
C141	ECJ2VB1H103K	CERAMIC	50V		10nF
C142	ECJ2FB1H104	CERAMIC	50V		100nF
C251	ECA1HM010GB	ELECT	50V		1μF

Cct Ref	Parts Number	Description			
C252	ECA1HM010GB	ELECT	50V	1µF	
C253	ECA1HM4R7GB	ELECT	50V	4.7µF	
C254	ECJ2VB1H103K	CERAMIC	50V	10nF	
C255	ECA1HM4R7GB	ELECT	50V	4.7µF	
C256	ECJ2VB1H103K	CERAMIC	50V	10nF	
C259	ECEA1HN2R2	ELECT	50V	2.2µF	
C260	ECEA1HN2R2	ELECT	50V	2.2µF	
C261	ECA1HM100GB	ELECT	50V	10µF	
C262	ECA1HM100GB	ELECT	50V	10µF	
C263	ECEA1HU101	ELECT	50V	100µF	
C264	ECQV1H274JL3	FILM	50V	270nF	
C265	ECQV1H274JL3	FILM	50V	270nF	
C266	ECJ2FB1H104	CERAMIC	50V	100nF	
C267	ECJ2FB1H104	CERAMIC	50V	100nF	
C269	ECA1HM332	ELECTRO	50V	3.3nF	
C350	ECJ2VC1H102J	CERAMIC	50V	1nF	
C352	ECUV1H224ZFX	S.M. CAP	50V	220nF	
C353	ECJ2YB1H104K	CERAMIC	50V	100nF	
C354	ECQM2104KZ	FILM	250V	100nF	
C355	ECKC2H102J	CERAMIC	500V	1nF	▲
C358	ECJ2VC1H222J	CERAMIC	50V	2.2nF	
C360	ECJ2VC1H102J	CERAMIC	50V	1nF	
C362	ECUV1H224ZFX	S.M. CAP	50V	220nF	
C363	ECJ2YB1H104K	CERAMIC	50V	100nF	
C364	ECQM2104KZ	FILM	250V	100nF	
C365	ECKC2H102J	CERAMIC	500V	1nF	▲
C368	ECJ2VC1H222J	CERAMIC	50V	2.2nF	
C369	ECJ2VC1H220J	CERAMIC	50V	22pF	
C370	ECJ2VC1H102J	CERAMIC	50V	1nF	
C372	ECUV1H224ZFX	S.M. CAP	50V	220nF	
C373	ECJ2YB1H104K	CERAMIC	50V	100nF	
C374	ECQM2104KZ	FILM	250V	100nF	
C375	ECKC2H102J	CERAMIC	500V	1nF	▲
C378	ECJ2VC1H222J	CERAMIC	50V	2.2nF	
C381	ECA1HM101GB	ELECT	50V	100µF	
C382	ECA1CM471GB	ELECT	16V	470µF	
C383	ECJ2VB1H103K	CERAMIC	50V	10nF	
C384	ECQM2104KZ	FILM	250V	100nF	
C385	ECA2EM220B	ELECT	250V	22µF	
C386	ECKC3D152J	CERAMIC	2KV	1.5nF	▲
C395	ECA1HMR47GB	ELECT	50V	0.47µF	
C451	ECJ2VB1H102K	CERAMIC	50V	1nF	
C456	ECA1HHG221B	ELECT	50V	220µF	
C459	ECQB1224KFW	FILM	100V	220nF	
C463	ECEA1HU221	ELECT	50V	220µF	
C501	ECA1EM101GB	ELECT	25V	100µF	
C508	ECQB1H103J	FILM	50V	10nF	
C509	ECA1VM470B	ELECT	35V	47µF	
C521	ECKC3A152J	CERAMIC	1KV	1500pF	▲
C522	ECKC3A272J	CERAMIC	1KV	2.7µF	
C523	ECKC3A151J	CERAMIC	1KV	150pF	▲
C524	ECQM6223JZW	FILM	600V	22nF	
C525	ECQM4223JZW	FILM	400V	22nF	
C526	ECKC3D101J	CERAMIC	2KV	100pF	▲
C527	ECA1HM010GB	ELECT	50V	1µF	
C528	ECKC3D471JB	CERAMIC	2KV	470pF	▲
C529	ECA1HM100GB	ELECT	50V	10µF	
C530	ECKC3A681J	CERAMIC	1KV	680pF	▲
C531	ECKC3D102J	CERAMIC	2KV	1nF	▲
C551	ECKC3D681J	CERAMIC	2KV	680pF	▲
C552	ECWH20102JVY	FILM	200V	1µF	
C557	ECKC2H471J	CERAMIC	500V	470pF	▲
C558	ECA1HHG471E	ELECT	50V	470µF	
C559	ECJ2FB1H104	CERAMIC	50V	100nF	
C560	ECQM2A104KZ	FILM	100V	100nF	
C561	ECA1EM222GB	ELECT	25V	2200µF	

Cct Ref	Parts Number	Description			
C562	ECKC2H101J	CERAMIC	500V	100pF	▲
C563	ECA2EM220B	ELECT	250V	22µF	
C564	ECEA2AU2R2	ELECT	100V	2.2µF	
C565	ECQB1H273J	FILM	50V	27nF	
C566	ECKC2H471J	CERAMIC	500V	470pF	▲
C567	ECEA1HU102	ELECT	50V	1000µF	
C568	ECKC2H471J	CERAMIC	500V	470pF	▲
C569	ECKC2H102J	CERAMIC	500V	1nF	▲
C573	ECJ2VC1H221J	CERAMIC	50V	220pF	
C574	ECJ2VC1H221J	CERAMIC	50V	220pF	
C581	ECWF4624JBB	FILM	400V	620nF	
C582	ECWF4514JBB	FILM	400V	810nF	
C583	ECWH20512JVB	FILM	200V	5.1nF	
C584	ECWH20472JVB	FILM	200V	4.7nF	
C586	ECQM4223KC	FILM	400V	220nF	
C587	ECQF4123JZH	FILM	400V	12nF	▲
C588	ECWF4624JBB	FILM	400V	620nF	
C701	ECKC2H152J	CERAMIC	500V	1.5nF	▲
C702	ECQE1335KFB	FILM	100V	3.3µF	
C703	ECJ2VB1H333K	CERAMIC	50V	33nF	
C704	ECQV1H474JZ	FILM	50V	470nF	
C706	ECKC2H471J	CERAMIC	500V	470pF	▲
C707	ECJ2VB1H471K	CERAMIC	50V	470pF	
C708	ECJ2VB1H333K	CERAMIC	50V	33nF	
C709	ECJ2VB1H333K	CERAMIC	50V	33nF	
C801	222233821224	FILM	210V	220nF	▲
C802	222233821224	FILM	210V	220nF	▲
C804	222233820154	ELECT	275V	150nF	
C806	ECKWNA101MBC	CERAMIC	400V	100µF	▲
C807	ECKC2H472J	CERAMIC	500V	4.7nF	▲
C808	ECKC2H472J	CERAMIC	500V	4.7nF	▲
C809	ECKC2H472J	CERAMIC	500V	4.7nF	▲
C810	ECKC2H472J	CERAMIC	500V	4.7nF	▲
C811	222215166479	ELECT	400V	47µF	
C812	ECA1HM010GB	ELECT	50V	1µF	
C813	ECA1EM101GB	ELECT	25V	100µF	
C814	ECQE6823KFB	FILM	600V	82nF	
C815	ECKC3D331J	CERAMIC	2KV	330pF	▲
C816	ECKC1H471J	CERAMIC	50V	470pF	
C819	ECQM4103KZ	FILM	400V	10nF	
C821	ECQB1H104J	FILM	50V	100nF	
C822	ECQB1H683K	FILM	50V	68nF	
C824	ECKC1H471J	CERAMIC	50V	470pF	
C825	ECA1EM470GB	ELECT	25V	47µF	
C826	ECA1HM220GB	ELECT	50V	22µF	
C827	222233820154	ELECT	275V	150nF	
C839	ECKCNS332J	CERAMIC	1.2KV	3.3nF	▲
C842	ECQB1H821J	FILM	50V	820nF	
C843	ECKC1H471J	CERAMIC	50V	470pF	
C844	ECKC3D152J	CERAMIC	2KV	1.5nF	▲
C845	ECA1HM4R7GB	ELECT	50V	4.7µF	
C847	ECA1EM101GB	ELECT	25V	100µF	
C848	ECA1EM101GB	ELECT	25V	100µF	
C849	ECOS2GP221BB	ELECT	400V	220µF	
C850	ECKC2H471J	CERAMIC	500V	470pF	▲
C851	EEUFC1E102	ELECT	35V	1nF	
C852	ECKC2H471J	CERAMIC	500V	470pF	▲
C853	EEUFC1E102	ELECT	35V	1nF	
C855	ECA1HM470GB	ELECT	50V	47µF	
C858	ECA1HM2R2GB	ELECT	50V	2.2µF	
C860	ECA1EM221GB	ELECT	25V	220pF	
C861	ECA1HM010GB	ELECT	50V	1µF	
C862	EEUFC1E102	ELECT	35V	1nF	
C891	ECA1HM010GB	ELECT	50V	1µF	
C892	ECA1CM100GB	ELECT	16V	10µF	
C893	ECA2CHG101E	ELECT	160V	100µF	

Cct Ref	Parts Number	Description			
C894	EEUEB2D101B	CERAMIC	250V	100pF	
C895	ECKC3D471JB	CERAMIC	2KV	470pF	△
C896	ECA1HHG102E	ELECT	50V	1nF	
C897	ECA1VHG331B	ELECT	35V	330pF	
C899	ECKC2H471J	CERAMIC	500V	470pF	△
C902	ECA1VM101GB	ELECT	35V	100µF	
C904	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C906	ECJ2YB1H563K	CERAMIC	50V	56nF	
C909	ECKC2H472J	CERAMIC	500V	4.7nF	△
C910	ECKC2H472J	CERAMIC	500V	4.7nF	△
C912	ECA2CM220B	ELECT	160V	22µF	
C913	ECA1HM101GB	ELECT	50V	100µF	
C914	ECA1HM101GB	ELECT	50V	100µF	
C916	ECA2CM220B	ELECT	160V	22µF	
C917	ECA1HM100GB	ELECT	50V	10µF	
C918	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C1001	ECJ2YB1H104K	CERAMIC	50V	100nF	
C1002	ECA1HM101GB	ELECT	50V	100µF	
C1003	ECJ2YB1H104K	CERAMIC	50V	100nF	
C1004	ECJ2YB1H103K	CERAMIC	50V	10nF	
C1005	ECA1HM101GB	ELECT	50V	100µF	
C1006	ECJ2YB1H104K	CERAMIC	50V	100nF	
C1007	ECJ2VC1H270J	CERAMIC	50V	27pF	
C1101	ECJ1VF1E104	CERAMIC	35V	100nF	
C1103	ECJ1VF1E104	CERAMIC	35V	100nF	
C1104	ECJ1VF1E104	CERAMIC	35V	100nF	
C1106	ECJ1VF1E104	CERAMIC	35V	100nF	
C1107	ECJ1VF1E104	CERAMIC	35V	100nF	
C1108	ECJ1VF1E104	CERAMIC	35V	100nF	
C1109	ECJ1VF1E104	CERAMIC	35V	100nF	
C1111	ECJ1VB1C473	CERAMIC	16V	47nF	
C1112	ECJ1VF1E104	CERAMIC	35V	100nF	
C1113	ECEA1AKA101	ELECTRO	25V	100pF	
C1114	ECEA1CKA100	ELECT	16V	10µF	
C1115	ECJ1VF1E104	CERAMIC	35V	100nF	
C1116	ECJ1VF1E104	CERAMIC	35V	100nF	
C1117	ECJ1VF1E104	CERAMIC	35V	100nF	
C1118	ECJ1VB1H472K	CERAMIC	50V	4.7nF	
C1119	ECJ1VF1E104	CERAMIC	35V	100nF	
C1120	ECJ1VF1E104	CERAMIC	35V	100nF	
C1121	ECJ1VF1E104	CERAMIC	35V	100nF	
C1122	ECJ1VF1E104	CERAMIC	35V	100nF	
C1123	ECJ1VF1E104	CERAMIC	35V	100nF	
C1124	ECJ1VF1E104	CERAMIC	35V	100nF	
C1125	ECJ1VF1E104	CERAMIC	35V	100nF	
C1126	ECJ1VF1E104	CERAMIC	35V	100nF	
C1127	ECJ1VF1E104	CERAMIC	35V	100nF	
C1128	ECJ1VF1E104	CERAMIC	35V	100nF	
C1129	ECJ1VF1E104	CERAMIC	35V	100nF	
C1130	ECJ1VF1E104	CERAMIC	35V	100nF	
C1131	ECJ1VC1H220J	CERAMIC	50V	22pF	
C1132	ECJ1VC1H220J	CERAMIC	50V	22pF	
C1133	ECJ1VF1E104	CERAMIC	35V	100nF	
C1134	ECJ1VF1E104	CERAMIC	35V	100nF	
C1135	ECJ1VF1E104	CERAMIC	35V	100nF	
C1136	ECJ1VF1E104	CERAMIC	35V	100nF	
C1138	ECJ1VC1H221	CERAMIC	50V	220pF	
C1139	ECJ1VC1H221	CERAMIC	50V	220pF	
C1140	ECJ1VB1C104K	CERAMIC	16V	100nF	
C1142	ECJ1VC1H151J	CERAMIC	50V	150pF	
C1145	ECJ1VF1E104	CERAMIC	35V	100nF	
C1146	ECEA1CKA100	ELECT	16V	10µF	
C1147	ECJ1VC1H680J	CERAMIC	50V	68pF	
C1148	ECJ1VC1H680J	CERAMIC	50V	68pF	
C1149	ECJ1VC1H680J	CERAMIC	50V	68pF	
C1150	ECJ1VB1H102	CERAMIC	50V	10nF	

Cct Ref	Parts Number	Description			
C1151	ECJ1VB1H102	CERAMIC	50V	10nF	
C1154	ECJ1VC1H271	CERAMIC	50V	270pF	
C1156	ECJ1VF1E104	CERAMIC	35V	100nF	
C1157	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C1159	ECEA1CKA100	ELECT	16V	10µF	
C1160	ECEA1AKA101	ELECTRO	25V	100pF	
C1161	ECEA1AKA101	ELECTRO	25V	100pF	
C1162	ECEA1AKA101	ELECTRO	25V	100pF	
C1163	ECEA1AKA221B	ELECT	10V	220µF	
C1164	ECEA1AKA101	ELECTRO	25V	100pF	
C1165	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C1166	ECJ1VF1E104	CERAMIC	35V	100nF	
C1167	ECEA1AKA101	ELECTRO	25V	100pF	
C1168	ECJ1VF1E104	CERAMIC	35V	100nF	
C1169	ECEA1AKA101	ELECTRO	25V	100pF	
C1170	ECEA1AKA101	ELECTRO	25V	100pF	
C1177	ECJ1VB1H102	CERAMIC	50V	10nF	
C1178	ECJ1VB1H102	CERAMIC	50V	10nF	
C1179	ECJ1VB1H102	CERAMIC	50V	10nF	
C1180	ECJ1VC1H271	CERAMIC	50V	270pF	
C1181	ECJ1VC1H271	CERAMIC	50V	270pF	
C1182	ECJ1VC1H271	CERAMIC	50V	270pF	
C1183	ECJ1VC1H271	CERAMIC	50V	270pF	
C1184	ECJ1VC1H271	CERAMIC	50V	270pF	
C1185	ECJ1VC1H271	CERAMIC	50V	270pF	
C1188	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C1189	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C1190	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C1191	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C1192	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C1513	ECJ1VB1A224	CERAMIC	25V	220nF	
C1514	ECJ1VB1A224	CERAMIC	25V	220nF	
C1515	ECJ1VB1A224	CERAMIC	25V	220nF	
C1516	ECJ1VB1A224	CERAMIC	25V	220nF	
C1517	ECJ1VB1A224	CERAMIC	25V	220nF	
C1518	ECJ1VB1A224	CERAMIC	25V	220nF	
C1519	ECJ1VB1A224	CERAMIC	25V	220nF	
C1520	ECJ1VB1H152	CERAMIC	50V	1.5nF	
C1521	ECJ1VC1H391	CERAMIC	50V	390pF	
C1522	ECJ1VB1C104K	CERAMIC	16V	100nF	
C1523	ECJ1VB1H152	CERAMIC	50V	1.5nF	
C1524	ECJ1VB1C473	CERAMIC	16V	47nF	
C1525	ECJ1VF1E104	CERAMIC	35V	100nF	
C1526	ECJ1VF1E104	CERAMIC	35V	100nF	
C1527	ECJ1VF1E104	CERAMIC	35V	100nF	
C1528	ECJ1VB1H152	CERAMIC	50V	1.5nF	
C1529	ECJ1VB1C473	CERAMIC	16V	47nF	
C1530	ECJ1VB1H103	CERAMIC	50V	10nF	
C1531	ECEA1AKA101	ELECTRO	25V	100pF	
C1532	ECJ1VC1H080	CERAMIC	63V	8pF	
C1533	ECJ1VC1H080	CERAMIC	63V	8pF	
C1534	ECJ1VB1C473	CERAMIC	16V	47nF	
C1535	ECEA1CKA100	ELECT	16V	10µF	
C1536	ECJ1VC1H391	CERAMIC	50V	390pF	
C1537	ECJ1VB1H152	CERAMIC	50V	1.5nF	
C1538	ECJ1VB1A224	CERAMIC	25V	220nF	
C1539	ECEA1AKA101	ELECTRO	25V	100pF	
C1540	ECJ2YB1C334	CERAMIC	16V	330nF	
C1541	ECJ1VB1A224	CERAMIC	25V	220nF	
C1542	ECJ1VB1H152	CERAMIC	50V	1.5nF	
C1543	ECJ1VB1H102	CERAMIC	50V	10nF	
C1544	ECJ2YB1C334	CERAMIC	16V	330nF	
C1545	ECJ1VC1H391	CERAMIC	50V	390pF	
C1546	ECEA1CKA100	ELECT	16V	10µF	
C1547	ECJ1VB1C473	CERAMIC	16V	47nF	
C1548	ECJ1VF1E104	CERAMIC	35V	100nF	

Cct Ref	Parts Number	Description		
C1551	ECJ1VC1H271	CERAMIC	50V	270pF
C1552	ECJ1VC1H271	CERAMIC	50V	270pF
C1553	ECJ1VC1H221	CERAMIC	50V	220pF
C1554	ECJ1VC1H221	CERAMIC	50V	220pF
C1555	ECJ1VC1H221	CERAMIC	50V	220pF
C1556	ECJ1VC1H271	CERAMIC	50V	270pF
C1557	ECJ1VC1H271	CERAMIC	50V	270pF
C1558	ECJ1VC1H271	CERAMIC	50V	270pF
C1602	ECJ1VF1E104	CERAMIC	35V	100nF
C1603	ECJ1VB1H103	CERAMIC	50V	10nF
C1604	ECJ1VB1H103	CERAMIC	50V	10nF
C1605	ECEA1AKA101	ELECTRO	25V	100pF
C1606	ECJ1VC1H271	CERAMIC	50V	270pF
C1607	ECJ1VC1H561J	CERAMIC	50V	560pF
C1608	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1609	ECJ1VC1H271	CERAMIC	50V	270pF
C1610	ECJ1VC1H561J	CERAMIC	50V	560pF
C1611	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1612	ECJ1VB1H103	CERAMIC	50V	10nF
C1613	ECJ1VC1H271	CERAMIC	50V	270pF
C1614	ECJ1VC1H561J	CERAMIC	50V	560pF
C1615	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1616	ECJ1VB1H103	CERAMIC	50V	10nF
C1701	ECJ1VC1H270	CERAMIC	50V	27pF
C1702	ECJ1VC1H270	CERAMIC	50V	27pF
C1703	ECJ1VC1H271	CERAMIC	50V	270pF
C1704	ECJ1VC1H561J	CERAMIC	50V	560pF
C1705	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1706	ECEA1AKA101	ELECTRO	25V	100pF
C1707	ECJ1VC1H270	CERAMIC	50V	27pF
C1708	ECEA1HKN010	ELECT	50V	1μF
C1710	ECJ1VB1H103	CERAMIC	50V	10nF
C1711	ECJ1VB1H103	CERAMIC	50V	10nF
C1712	ECJ1VB1C333	CERAMIC	16V	33nF
C1713	ECEA1CKA100	ELECT	16V	10μF
C1714	ECJ1VF1E104	CERAMIC	35V	100nF
C1715	ECEA1AKA101	ELECTRO	25V	100pF
C1716	ECJ1VB1H102	CERAMIC	50V	10nF
C1717	ECJ1VF1A105	CERAMIC	25V	1pF
C1718	ECJ1VF1A105	CERAMIC	25V	1pF
C1719	ECJ1VB1H103	CERAMIC	50V	10nF
C1720	ECJ1VB1H103	CERAMIC	50V	10nF
C1721	ECJ1VB1H103	CERAMIC	50V	10nF
C1722	ECJ1VB1C104K	CERAMIC	16V	100nF
C1723	ECEA1CKA100	ELECT	16V	10μF
C1724	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1728	ECJ1VB1H222K	CERAMIC	50V	2.2nF
C1729	ECJ1VC1H561J	CERAMIC	50V	560pF
C1730	ECJ1VC1H271	CERAMIC	50V	270pF
C1731	ECJ1VF1E104	CERAMIC	35V	100nF
C1732	ECJ1VF1E104	CERAMIC	35V	100nF
C1733	ECJ1VF1E104	CERAMIC	35V	100nF
C1734	ECJ1VC1H331	CERAMIC	50V	330pF
C1735	ECJ1VC1H331	CERAMIC	50V	330pF
C1736	ECJ1VC1H331	CERAMIC	50V	330pF
C1737	ECJ2VB1C224K	CERAMIC	16V	220nF
C1738	ECJ1VB1H102	CERAMIC	50V	10nF
C1739	ECJ1VF1E104	CERAMIC	35V	100nF
C1771	ECJ1VC1H101J	CERAMIC	50V	100pF
C1772	ECJ2VC1H222J	CERAMIC	50V	2.2nF
C1781	ECEA1CKA100	ELECT	16V	10μF
C1782	ECJ1VF1E104	CERAMIC	35V	100nF
C1784	ECJ1VC1H151J	CERAMIC	50V	150pF
C1790	ECJ1VB1H103	CERAMIC	50V	10nF
C1791	ECJ2VC1H222J	CERAMIC	50V	2.2nF
C1792	ECJ2VC1H222J	CERAMIC	50V	2.2nF

Cct Ref	Parts Number	Description		
C1901	ECJ2VB1H103K	CERAMIC	50V	10nF
C1902	ECJ2VB1H104K	CERAMIC	50V	100nF
C1905	ECA1CM470GB	ELECT	16V	47μF
C1906	ECJ2VB1H103K	CERAMIC	50V	10nF
C1907	ECA1CM470GB	ELECT	16V	47μF
C1908	ECJ2VB1H104K	CERAMIC	50V	100nF
C1909	ECJ2VB1H104K	CERAMIC	50V	100nF
C2001	ECA1CM100GB	ELECT	16V	10μF
C2002	ECJ2VB1H152K	ELECT	50V	1.5nF
C2003	ECJ2VC1H471J	CERAMIC	50V	470pF
C2004	ECJ2VC1H221J	CERAMIC	50V	220pF
C2005	ECJ2FB1H104	CERAMIC	50V	100nF
C2006	ECJ2VB1H102K	CERAMIC	50V	1nF
C2007	ECJ2VB1H102K	CERAMIC	50V	1nF
C2009	ECJ2VB1H102K	CERAMIC	50V	1nF
C2010	ECJ2VB1H102K	CERAMIC	50V	1nF
C2011	ECJ2VB1H102K	CERAMIC	50V	1nF
C2012	ECA1CM100GB	ELECT	16V	10μF
C2013	ECA1CM100GB	ELECT	16V	10μF
C2014	ECJ2VC1H471J	CERAMIC	50V	470pF
C2015	ECJ2VB1H152K	ELECT	50V	1.5nF
C2016	ECA1HM100GB	ELECT	50V	10μF
C2017	ECJ2VB1H102K	CERAMIC	50V	1nF
C2018	ECJ2VB1H102K	CERAMIC	50V	1nF
C2019	ECJ2VB1H102K	CERAMIC	50V	1nF
C2020	ECJ2VB1H102K	CERAMIC	50V	1nF
C2021	ECA1HM3R3GB	ELECT	50V	3.3μF
C2022	ECJ2FB1H104	CERAMIC	50V	100nF
C2023	ECJ2VC1H221J	CERAMIC	50V	220pF
C2024	ECJ2VC1H221J	CERAMIC	50V	220pF
C2025	ECA1CM100GB	ELECT	16V	10μF
C2026	ECJ2FB1H104	CERAMIC	50V	100nF
C2027	ECJ2VC1H221J	CERAMIC	50V	220pF
C2028	ECA1CM100GB	ELECT	16V	10μF
C2029	ECJ2VB1H152K	ELECT	50V	1.5nF
C2030	ECJ2VC1H471J	CERAMIC	50V	470pF
C2031	ECJ2VC1H070D	CERAMIC	50V	7pF
C2032	ECJ2VC1H470J	CERAMIC	50V	47pF
C2034	ECJ2VC1H010C	CERAMIC	50V	1pF
C2035	ECJ2VC1H010C	CERAMIC	50V	1pF
C2037	ECA1CM102E	ELECT	16V	1000μF
C2038	ECA1CM471GB	ELECT	16V	470μF
C2039	ECJ2VB1H103K	CERAMIC	50V	10nF
C2040	ECJ2VB1H103K	CERAMIC	50V	10nF
C2041	ECJ2VF1C334Z	CERAMIC	16V	330nF
C2042	ECJ2VF1C334Z	CERAMIC	16V	330nF
C2043	ECJ2VB1H103K	CERAMIC	50V	10nF
C2044	ECA1CM102B	ELECT	16V	1000μF
C2045	ECA1CM331B	ELECT	16V	330μF
C2200	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2201	ECA1HM100GB	ELECT	50V	10μF
C2202	ECJ2FB1H104	CERAMIC	50V	100nF
C2205	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2206	ECA1HM2R2GB	ELECT	50V	2.2μF
C2207	ECJ2VB1H103K	CERAMIC	50V	10nF
C2208	ECJ2VB1C683K	ELECT	16V	68nF
C2209	ECJ2VC1H681J	CERAMIC	50V	680pF
C2210	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2212	ECA1CM470GB	ELECT	16V	47μF
C2213	ECJ2VB1H103K	CERAMIC	50V	10nF
C2217	ECJ2VB1H223K	CERAMIC	50V	22nF
C2218	ECJ2VB1H223K	CERAMIC	50V	22nF
C2219	ECJ2FB1H104	CERAMIC	50V	100nF
C2221	ECA1HM100GB	ELECT	50V	10μF
C2223	ECJ2VB1H223K	CERAMIC	50V	22nF
C2225	ECJ2VB1H562K	CERAMIC	50V	5.6nF

Cct Ref	Parts Number	Description		
C2226	ECA1HM2R2GB	ELECT	50V	2.2μF
C2227	ECJ2VB1H103K	CERAMIC	50V	10nF
C2228	ECJ2VB1C683K	ELECT	16V	68nF
C2229	ECJ2VC1H681J	CERAMIC	50V	680pF
C2231	ECJ2FB1H104	CERAMIC	50V	100nF
C2232	ECJ2FB1H104	CERAMIC	50V	100nF
C2233	ECJ2VB1H223K	CERAMIC	50V	22nF
C2235	ECJ2VB1H103K	CERAMIC	50V	10nF
C2238	ECA1CM471GB	ELECT	16V	470μF
C2351	ECA1CM470GB	ELECT	16V	47μF
C2352	ECA1HM010GB	ELECT	50V	1μF
C2353	ECA1HM010GB	ELECT	50V	1μF
C2355	ECJ2VC1H101J	CERAMIC	50V	100pF
C2356	ECJ2VC1H101J	CERAMIC	50V	100pF
C2357	ECJ2VB1H103K	CERAMIC	50V	10nF
C2358	ECA1HM100GB	ELECT	50V	10μF
C2359	ECA1HM010GB	ELECT	50V	1μF
C2360	ECA1HM010GB	ELECT	50V	1μF
C2361	ECA1VM102GE	ELECT	35V	1nF
C2362	ECA1VM102GB	ELECT	35V	1nF
C2363	ECJ2VC1H102J	CERAMIC	50V	1nF
C2364	ECJ2VC1H102J	CERAMIC	50V	1nF
C2365	ECA1HM330B	ELECT	50V	33μF
C2366	ECA1HM330B	ELECT	50V	33μF
C2367	ECJ2VC1H102J	CERAMIC	50V	1nF
C2368	ECJ2VC1H102J	CERAMIC	50V	1nF
C2369	ECA1CM331B	ELECT	16V	330μF
C2370	ECA1CM102B	ELECT	16V	1000μF
C2371	ECA1HM101GB	ELECT	50V	100μF
C3001	ECJ1VC1H561J	CERAMIC	50V	560pF
C3002	ECJ1VC1H561J	CERAMIC	50V	560pF
C3003	ECJ1VC1H561J	CERAMIC	50V	560pF
C3005	ECJ1VC1H561J	CERAMIC	50V	560pF
C3006	ECJ1VC1H561J	CERAMIC	50V	560pF
C3007	ECJ1VC1H561J	CERAMIC	50V	560pF
C3009	ECJ1VC1H561J	CERAMIC	50V	560pF
C3010	ECJ1VC1H561J	CERAMIC	50V	560pF
C3011	ECEA1CKA100	ELECT	16V	10μF
C3012	ECJ1VC1H561J	CERAMIC	50V	560pF
C3014	ECJ1VC1H561J	CERAMIC	50V	560pF
C3015	ECJ1VC1H561J	CERAMIC	50V	560pF
C3016	ECEA1CKA100	ELECT	16V	10μF
C3017	ECJ1VC1H561J	CERAMIC	50V	560pF
C3019	ECJ1VC1H561J	CERAMIC	50V	560pF
C3020	ECJ1VC1H561J	CERAMIC	50V	560pF
C3021	ECJ1VC1H561J	CERAMIC	50V	560pF
C3023	ECJ1VC1H561J	CERAMIC	50V	560pF
C3024	ECJ1VC1H561J	CERAMIC	50V	560pF
C3025	ECJ1VC1H561J	CERAMIC	50V	560pF
C3027	ECEA1CKA100	ELECT	16V	10μF
C3028	ECEA1CKA100	ELECT	16V	10μF
C3029	ECEA1CKA100	ELECT	16V	10μF
C3030	ECEA1CKA100	ELECT	16V	10μF
C3031	ECEA1CKA100	ELECT	16V	10μF
C3032	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3033	ECEA1AKA330	ELECTRO	25V	33pF
C3034	ECJ1VB1H103	CERAMIC	50V	10nF
C3035	ECEA1CKA470	ELECT	16V	47μF
C3036	ECEA1CKA470	ELECT	16V	47μF
C3037	ECJ1VC1H101J	CERAMIC	50V	100pF
C3038	ECJ1VC1H101J	CERAMIC	50V	100pF
C3039	ECJ1VC1H101J	CERAMIC	50V	100pF
C3040	ECJ1VC1H561J	CERAMIC	50V	560pF
C3041	ECJ1VC1H561J	CERAMIC	50V	560pF
C3042	ECJ1VC1H561J	CERAMIC	50V	560pF
C3043	ECJ1VC1H561J	CERAMIC	50V	560pF

Cct Ref	Parts Number	Description		
C3044	ECJ1VB1C104K	CERAMIC	16V	100nF
C3045	ECEA1CKA100	ELECT	16V	10μF
C3046	ECEA1CKA100	ELECT	16V	10μF
C3047	ECEA1CKA100	ELECT	16V	10μF
C3048	ECEA1CKA100	ELECT	16V	10μF
C3051	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3052	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3053	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3054	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3055	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3056	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3057	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3058	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3059	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3060	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3061	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3062	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3063	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3064	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3065	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3066	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3067	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3068	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3069	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3071	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3072	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3073	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3074	ECJ2VF1C474Z	CERAMIC	16V	470nF
C3076	ECEA1CKA100	ELECT	16V	10μF
C3077	ECEA1CKA100	ELECT	16V	10μF
C3078	ECEA1CKA470	ELECT	16V	47μF
C3079	ECJ1VB1H103	CERAMIC	50V	10nF
C3080	ECEA1CKA100	ELECT	16V	10μF
C3081	ECEA1CKA100	ELECT	16V	10μF
C3083	ECEA1CKA100	ELECT	16V	10μF
C3084	ECJ2VB1H473K	CERAMIC	50V	47nF
C3085	ECJ2VB1H473K	CERAMIC	50V	47nF
C3086	ECJ2VB1H473K	CERAMIC	50V	47nF
C3087	ECJ2VB1H473K	CERAMIC	50V	47nF
C3088	ECJ2VB1H473K	CERAMIC	50V	47nF
C3089	ECJ2VB1H473K	CERAMIC	50V	47nF
C3092	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3093	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3094	ECJ2VF1C105Z	CERAMIC	16V	1pF
C3201	ECJ2VB1H103K	CERAMIC	50V	10nF
C3202	ECJ2VB1H103K	CERAMIC	50V	10nF
C3203	ECJ2VC1H561J	CERAMIC	50V	560pF
C3204	ECJ2VC1H561J	CERAMIC	50V	560pF
C3205	ECA1HM470GB	ELECT	50V	47μF
C3206	ECA1HM470GB	ELECT	50V	47μF
C3207	ECJ2VC1H271J	CERAMIC	50V	270pF
C3208	ECJ2VC1H271J	CERAMIC	50V	270pF
C3210	ECJ2VC1H271J	CERAMIC	50V	270pF
C3211	ECJ2VC1H271J	CERAMIC	50V	270pF
C3213	ECJ2VC1H561J	CERAMIC	50V	560pF
C3214	ECJ2VC1H561J	CERAMIC	50V	560pF
C3215	ECA1HM470GB	ELECT	50V	47μF
C3216	ECA1HM470GB	ELECT	50V	47μF
C3217	ECJ2VC1H561J	CERAMIC	50V	560pF
C3218	ECJ2VC1H561J	CERAMIC	50V	560pF
C3301	ECJ1VB1H103	CERAMIC	50V	10nF
C3302	ECEA1AKA330	ELECTRO	25V	33pF
C3351	ECA1CM221GB	ELECT	16V	220μF
C3801	ECJ2FB1H104	CERAMIC	50V	100nF
C3802	ECA1CM221GB	ELECT	16V	220μF
C3803	ECJ2FB1H104	CERAMIC	50V	100nF

Cct Ref	Parts Number	Description			
C3804	ECA1CM470GB	ELECT	16V	47μF	
C3805	ECJ2VB1H103K	CERAMIC	50V	10nF	
C3806	ECEA1HU101	ELECT	50V	100μF	
C3807	ECA1AHG471E	ELECT	10V	470pF	
C3808	ECJ2FB1H104	CERAMIC	50V	100nF	
C3809	ECA0JM221E	CERAMIC	16V	220pF	
C3810	ECJ2VB1H103K	CERAMIC	50V	10nF	
C3811	ECJ2FB1H104	CERAMIC	50V	100nF	
C3812	ECA1HM101GB	ELECT	50V	100μF	
C3813	ECJ2VB1H103K	CERAMIC	50V	10nF	
C3814	ECJ2FB1H104	CERAMIC	50V	100nF	
C3815	ECA1HM101GB	ELECT	50V	100μF	
C3816	ECJ2FB1H104	CERAMIC	50V	100nF	
C3817	ECA1HM101GB	ELECT	50V	100μF	
C3818	ECJ2YB1H104K	CERAMIC	50V	100nF	
C3819	ECA1AM472	ELECTRO	25V	4.7nF	
C3820	ECJ2VB1H102K	CERAMIC	50V	1nF	
C5001	EEVHB1C100R	CERAMIC	16V	10pF	
C5002	EEVHB1C100R	CERAMIC	16V	10pF	
C5003	EEVHB1H2R2R	ELEC CAP	50V	2.2μF	
C5004	EEVHB1C100R	CERAMIC	16V	10pF	
C5005	EEVHB1C100R	CERAMIC	16V	10pF	
C5006	EEVHB1H2R2R	ELEC CAP	50V	2.2μF	
C5007	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5008	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5009	ECJ1VB1H103	CERAMIC	50V	10nF	
C5011	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5012	ECJ1VB1H103	CERAMIC	50V	10nF	
C5013	ECJ1VB1H103	CERAMIC	50V	10nF	
C5014	ECJ1VB1H103	CERAMIC	50V	10nF	
C5017	ECJ1VB1H103	CERAMIC	50V	10nF	
C5018	ECJ1VB1H103	CERAMIC	50V	10nF	
C5021	ECJ1VC1H330J	CERAMIC	50V	33pF	
C5022	ECJ1VC1H330J	CERAMIC	50V	33pF	
C5025	ECJ1VB1H103	CERAMIC	50V	10nF	
C5026	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5027	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5028	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5029	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5030	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5031	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5032	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5033	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5034	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5035	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5036	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5037	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5038	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5039	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5040	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5041	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5042	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5043	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5044	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5045	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5046	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5047	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5048	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5049	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5050	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5051	EEVHB1C100R	CERAMIC	16V	10pF	
C5052	EEVHB1C100R	CERAMIC	16V	10pF	
C5053	EEVHB1C100R	CERAMIC	16V	10pF	
C5054	EEVHB1C100R	CERAMIC	16V	10pF	
C5055	EEVHB1C100R	CERAMIC	16V	10pF	
C5056	ECJ1VC1H101J	CERAMIC	50V	100pF	

Cct Ref	Parts Number	Description			
C5057	ECJ1VC1H101J	CERAMIC	50V	100pF	
C5058	ECJ1VC1H101J	CERAMIC	50V	100pF	
C5059	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5060	ECJ1VC1H330J	CERAMIC	50V	33pF	
C5061	ECJ1VC1H330J	CERAMIC	50V	33pF	
C5062	ECJ1VB1C104K	CERAMIC	16V	100nF	
C5101	EEUFC1E221	ELECT	35V	220pF	
C5110	ECJ1VF1E104	CERAMIC	35V	100nF	
C5115	ECJ1VC1H121	CERAMIC	50V	120pF	
C5116	ECJ1VC1H121	CERAMIC	50V	120pF	
C5117	ECJ1VC1H121	CERAMIC	50V	120pF	
C5118	ECJ1VC1H121	CERAMIC	50V	120pF	
C5119	ECJ1VC1H680J	CERAMIC	50V	68pF	
C5120	ECJ1VC1H270	CERAMIC	50V	27pF	
C5121	ECJ1VC1H270	CERAMIC	50V	27pF	
C5122	ECJ1VC1H270	CERAMIC	50V	27pF	
C5123	ECJ1VF1E104	CERAMIC	35V	100nF	
C5124	ECA1HM100GB	ELECT	50V	10μF	
C5125	ECJ1VF1E104	CERAMIC	35V	100nF	
C5126	ECJ1VF1E104	CERAMIC	35V	100nF	
C5127	ECJ1VF1E104	CERAMIC	35V	100nF	
C5128	ECJ1VF1E104	CERAMIC	35V	100nF	
C5129	ECJ1VF1E104	CERAMIC	35V	100nF	
C5130	ECA1HM101GB	ELECT	50V	100μF	
C5131	ECA1HM100GB	ELECT	50V	10μF	
C5132	ECA1HM100GB	ELECT	50V	10μF	
C5133	ECA1HM101GB	ELECT	50V	100μF	
C5134	ECA1HM101GB	ELECT	50V	100μF	
C5135	ECJ1VC1H331	CERAMIC	50V	330pF	
C5136	ECJ1VF1E104	CERAMIC	35V	100nF	
C5137	ECJ1VF1E104	CERAMIC	35V	100nF	
C5138	ECJ1VC1H331	CERAMIC	50V	330pF	
C5139	ECJ1VC1H221	CERAMIC	50V	220pF	
C5140	ECJ1VC1H221	CERAMIC	50V	220pF	
C5141	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C5142	ECA1VM470B	ELECT	35V	47μF	
C5143	ECA1VM470B	ELECT	35V	47μF	
C5144	ECJ1VB1H272	CERAMIC	50V	2.7nF	
C5145	ECJ1VB1H272	CERAMIC	50V	2.7nF	
C5201	ECJ1VF1E104	CERAMIC	35V	100nF	
C5202	ECJ1VF1E104	CERAMIC	35V	100nF	
C5203	ECJ1VF1E104	CERAMIC	35V	100nF	
C5204	ECJ1VF1E104	CERAMIC	35V	100nF	
C5205	ECJ1VC1H150	CERAMIC	50V	15pF	
C5206	ECJ1VF1E104	CERAMIC	35V	100nF	
C5208	ECJ1VF1E104	CERAMIC	35V	100nF	
C5209	ECJ1VF1E104	CERAMIC	35V	100nF	
C5210	ECJ1VF1E104	CERAMIC	35V	100nF	
C5211	ECJ1VB1E223	SMT CAP	35V	22nF	
C5212	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C5213	ECJ1VF1E104	CERAMIC	35V	100nF	
C5214	ECJ1VB1H103	CERAMIC	50V	10nF	
C5215	ECJ1VF1C334	CERAMIC	16V	330nF	
C5216	ECA1HM101GB	ELECT	50V	100μF	
C5217	ECJ1VC1H102J	CERAMIC	50V	1nF	
C5218	ECJ1VU1H220	CERAMIC	50V	22pF	
C5219	ECJ1VF1A105	CERAMIC	25V	1pF	
C5220	ECJ2VF1C105Z	CERAMIC	16V	1pF	
C5221	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C5222	ECJ1VU1H220	CERAMIC	50V	22pF	
C5223	ECJ1VC1H020	CERAMIC	50V	22pF	
C5224	ECA1HM101GB	ELECT	50V	100μF	
C5225	ECA1HM101GB	ELECT	50V	100μF	
C5226	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C5227	ECJ1VF1H103Z	CERAMIC	50V	10nF	
C5228	ECJ1VF1H103Z	CERAMIC	50V	10nF	

Cct Ref	Parts Number	Description		
C5229	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5230	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5231	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5232	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5233	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5234	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5235	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5236	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5237	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5238	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5239	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5240	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5241	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5242	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5243	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5244	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5245	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5246	ECA1VM470B	ELECT	35V	47µF
C5247	ECA1VM470B	ELECT	35V	47µF
C5248	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5249	ECJ1VF1E104	CERAMIC	35V	100nF
C5250	ECJ1VF1E104	CERAMIC	35V	100nF
C5251	ECJ1VF1E104	CERAMIC	35V	100nF
C5252	ECJ1VF1E104	CERAMIC	35V	100nF
C5253	ECJ1VF1E104	CERAMIC	35V	100nF
C5254	ECJ1VF1E104	CERAMIC	35V	100nF
C5255	ECJ1VF1E104	CERAMIC	35V	100nF
C5256	ECJ1VF1E104	CERAMIC	35V	100nF
C5257	ECJ1VF1E104	CERAMIC	35V	100nF
C5258	ECA1VM470B	ELECT	35V	47µF
C5259	ECJ1VF1E104	CERAMIC	35V	100nF
C5260	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5261	ECJ1VF1E104	CERAMIC	35V	100nF
C5262	ECJ1VF1E104	CERAMIC	35V	100nF
C5263	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5264	ECJ1VF1E104	CERAMIC	35V	100nF
C5265	ECJ1VF1E104	CERAMIC	35V	100nF
C5266	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5267	ECJ1VF1E104	CERAMIC	35V	100nF
C5268	ECJ1VF1E104	CERAMIC	35V	100nF
C5269	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5270	ECJ1VF1E104	CERAMIC	35V	100nF
C5271	ECA1VM470B	ELECT	35V	47µF
C5272	ECJ2VF1C105Z	CERAMIC	16V	1pF
C5273	ECJ1VF1E104	CERAMIC	35V	100nF
C5274	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5275	ECJ1VF1E104	CERAMIC	35V	100nF
C5276	ECJ1VF1E104	CERAMIC	35V	100nF
C5277	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5278	ECJ1VF1E104	CERAMIC	35V	100nF
C5279	ECJ1VF1E104	CERAMIC	35V	100nF
C5280	ECJ1VF1E104	CERAMIC	35V	100nF
C5281	ECJ1VF1E104	CERAMIC	35V	100nF
C5282	ECJ1VF1E104	CERAMIC	35V	100nF
C5283	ECJ1VF1E104	CERAMIC	35V	100nF
C5284	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5285	ECJ1VF1E104	CERAMIC	35V	100nF
C5286	ECJ1VF1E104	CERAMIC	35V	100nF
C5287	ECJ1VF1E104	CERAMIC	35V	100nF
C5288	ECJ1VF1E104	CERAMIC	35V	100nF
C5289	ECJ2VF1C105Z	CERAMIC	16V	1pF
C5290	ECJ2VF1C105Z	CERAMIC	16V	1pF
C5291	ECJ2VF1C105Z	CERAMIC	16V	1pF
C5292	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5293	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5294	ECJ2VF1C105Z	CERAMIC	16V	1pF

Cct Ref	Parts Number	Description		
C5295	ECJ1VB1E223	SMT CAP	35V	22nF
C5296	EEUFC0J821	ELECT	10V	820pF
C5297	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5298	ECJ1VF1E104	CERAMIC	35V	100nF
C5299	ECJ1VF1E104	CERAMIC	35V	100nF
C5300	ECJ1VF1E104	CERAMIC	35V	100nF
C5301	ECJ1VF1E104	CERAMIC	35V	100nF
C5302	ECA1CM470GB	ELECT	16V	47µF
C5303	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5304	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5305	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5306	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5307	ECJ1VF1A105	CERAMIC	25V	1pF
C5308	ECJ1VF1E104	CERAMIC	35V	100nF
C5313	ECA1HM100GB	ELECT	50V	10µF
C5350	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5351	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5352	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5353	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5354	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5355	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5356	EEUFC1C121	ELECT	16V	120pF
C5357	ECA1HM101GB	ELECT	50V	100µF
C5358	ECA1HM101GB	ELECT	50V	100µF
C5359	EEUFC1H820	ELECT	50V	82pF
C5360	EEUFC1C121	ELECT	16V	120pF
C5361	EEUFC1C121	ELECT	16V	120pF
C5362	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5363	EEUFC1C121	ELECT	16V	120pF
C5364	ECA1HM101GB	ELECT	50V	100µF
C5365	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5366	ECJ1VF1H103Z	CERAMIC	50V	10nF
C5401	ECJ1VF1E104	CERAMIC	35V	100nF
C5402	ECJ1VF1E104	CERAMIC	35V	100nF
C5403	ECJ1VF1E104	CERAMIC	35V	100nF
C5404	ECJ1VF1E104	CERAMIC	35V	100nF
C5405	ECJ1VF1E104	CERAMIC	35V	100nF
C5406	ECJ1VF1E104	CERAMIC	35V	100nF
C5407	ECJ1VF1E104	CERAMIC	35V	100nF
C5408	ECJ2VF1C105Z	CERAMIC	16V	1pF
C5409	ECJ1VF1E104	CERAMIC	35V	100nF
C5410	ECJ1VF1E104	CERAMIC	35V	100nF
C5411	ECJ1VF1E104	CERAMIC	35V	100nF
C5412	ECJ1VF1E104	CERAMIC	35V	100nF
C5413	ECA1HM100GB	ELECT	50V	10µF
C5414	ECA1HM100GB	ELECT	50V	10µF
C5415	ECJ1VF1E104	CERAMIC	35V	100nF
C5416	ECJ1VF1E104	CERAMIC	35V	100nF
C5417	ECA1HM100GB	ELECT	50V	10µF
C5418	ECA1HM100GB	ELECT	50V	10µF
C5419	ECJ1VF1E104	CERAMIC	35V	100nF
C5420	ECJ1VF1E104	CERAMIC	35V	100nF
C5421	ECJ1VF1E104	CERAMIC	35V	100nF
C5422	ECJ1VF1E104	CERAMIC	35V	100nF
C5423	ECJ1VF1E104	CERAMIC	35V	100nF
C5424	ECJ1VF1E104	CERAMIC	35V	100nF
C5425	ECJ1VF1E104	CERAMIC	35V	100nF
C5426	ECJ1VF1E104	CERAMIC	35V	100nF
C5427	ECA1HM101GB	ELECT	50V	100µF
C5428	ECJ1VF1E104	CERAMIC	35V	100nF
C5429	ECJ1VF1E104	CERAMIC	35V	100nF
C5430	ECJ1VF1E104	CERAMIC	35V	100nF
C5431	ECJ1VF1E104	CERAMIC	35V	100nF
C5432	ECJ1VF1E104	CERAMIC	35V	100nF
C5433	ECJ1VF1E104	CERAMIC	35V	100nF
C5434	ECJ1VF1E104	CERAMIC	35V	100nF

Cct Ref	Parts Number	Description		
C5435	ECJ1VF1E104	CERAMIC	35V	100nF
C5436	ECJ1VF1E104	CERAMIC	35V	100nF
C5437	ECJ1VF1E104	CERAMIC	35V	100nF
C5438	ECJ1VF1E104	CERAMIC	35V	100nF
C5439	ECJ1VF1E104	CERAMIC	35V	100nF
C5440	ECJ1VF1E104	CERAMIC	35V	100nF
C5441	ECJ1VF1E104	CERAMIC	35V	100nF
C5442	ECJ1VF1E104	CERAMIC	35V	100nF
C5443	ECJ1VF1E104	CERAMIC	35V	100nF
C5444	ECJ1VF1E104	CERAMIC	35V	100nF
C5445	ECA1HM101GB	ELECT	50V	100µF
C5446	ECJ1VF1E104	CERAMIC	35V	100nF
C5447	ECJ1VF1E104	CERAMIC	35V	100nF
C5448	ECJ1VF1E104	CERAMIC	35V	100nF
C5449	ECJ1VF1E104	CERAMIC	35V	100nF
C5450	ECJ1VF1E104	CERAMIC	35V	100nF
C5451	ECJ1VF1E104	CERAMIC	35V	100nF
C5452	ECJ1VF1E104	CERAMIC	35V	100nF
C5453	ECJ1VF1E104	CERAMIC	35V	100nF
C5454	ECJ1VF1E104	CERAMIC	35V	100nF
C5804	ECA1HM4R7GB	ELECT	50V	4.7µF
C5805	ECA1HM010GB	ELECT	50V	1µF
C5806	ECJ2VB1H103K	CERAMIC	50V	10nF
C5807	ECJ2VB1H103K	CERAMIC	50V	10nF
C5808	ECJ2VB1H103K	CERAMIC	50V	10nF
C5819	ECA1HM101GB	ELECT	50V	100µF
C5820	ECA1HM101GB	ELECT	50V	100µF
C5821	ECJ2FB1H104	CERAMIC	50V	100nF
C5822	ECA1CM102B	ELECT	16V	1000µF
C5823	ECA1CM102B	ELECT	16V	1000µF
C5824	ECA1HM101GB	ELECT	50V	100µF
C5825	ECJ2VB1H103K	CERAMIC	50V	10nF
C5826	ECA1CM220GB	ELECT	16V	22µF
C5828	ECJ2FB1H104	CERAMIC	50V	100nF
C5829	ECA1CM470GB	ELECT	16V	47µF
C5830	ECJ2VB1C104K	CERAMIC	16V	100nF
C5831	ECA1CM471GB	ELECT	16V	470µF
C5832	ECA1CM470GB	ELECT	16V	47µF
C5833	ECA1HM470GB	ELECT	50V	47µF
C5834	ECA1EM102GB	ELECT	25V	100µF
C5835	ECJ2VB1H103K	CERAMIC	50V	10nF
C5836	ECJ2FB1H104	CERAMIC	50V	100nF
C5837	ECA1CHG471B	ELECT	16V	470µF
C5843	ECA1HM100GB	ELECT	50V	10µF
C5861	ECJ1VF1E104	CERAMIC	35V	100nF
C5862	ECJ2VB1H183K	CERAMIC	50V	18nF
C5863	ECJ1VF1E104	CERAMIC	35V	100nF
TERMINALS AND LINKS				
.	TJS59034	AUDIO TERMINAL		
JK3001	0350536400	SCART SOCKET		
JK3002	0350536400	SCART SOCKET		
JK3003	0350536400	SCART SOCKET		
JK3004	YKC21-5861N	2 PIN JACK BOARD SOCKE		
JK3201	TJB8E027	AV TERMIAL		
R2810	TSF19252	FS LINK		△
R2811	TSF19632	FS LINK		△
SWITCHES				
S801	ESB92S11B	SWITCH		△
S1003	EVQ21405R	SWITCH		
S1004	EVQ21405R	SWITCH		
S1005	EVQ21405R	SWITCH		
S1006	EVQ21405R	SWITCH		
S1007	EVQ21405R	SWITCH		
RELAYS				
RL801	TSEH8011	RELAY		

Cct Ref	Parts Number	Description	
RL802	TSEH8011	RELAY	
INSTRUCTION BOOKS			
	TQB8E3494	ENGLISH	△