



Service  
Service  
Service

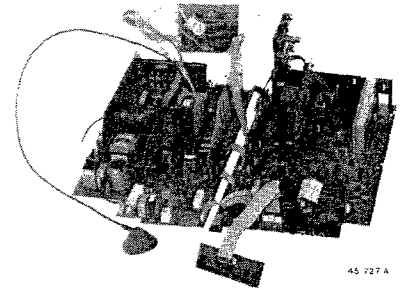

# Service Manual

Contents	Page
1. Block diagram and technical data	1.2
2. Connection facilities	2.1
3. Warnings and notes	3.1
4. Mechanical instructions	4.1
5. Detailed block diagram	5.1
6. Electrical diagrams and PCB layouts	
Power supply (Diagram A)	6.1
Field and line output stage (Diagram B)	6.10
Tuner, Source selection (Diagram C)	6.13
Video processing (Diagram D)	6.22
PIP module (Diagram J)	6.25
Picture tube panel (Diagram E)	6.30
SCAVEM filter (Diagram Y)	6.32
SCAVEM amplifier (Diagram Z)	6.33
Operation (Diagram H)	6.34
Sound processing (Diagram F)	6.36
Sound output amplifier (Diagram E)	6.44
NICAM module (Diagram K)	6.46
High-End box (Diagram L)	6.50
High-End box (Diagram M)	6.54
7. Electrical settings	7.1
8. List of error messages and repair tips	8.1
9. List of menus	9.1
10. Electrical parts lists	10.1

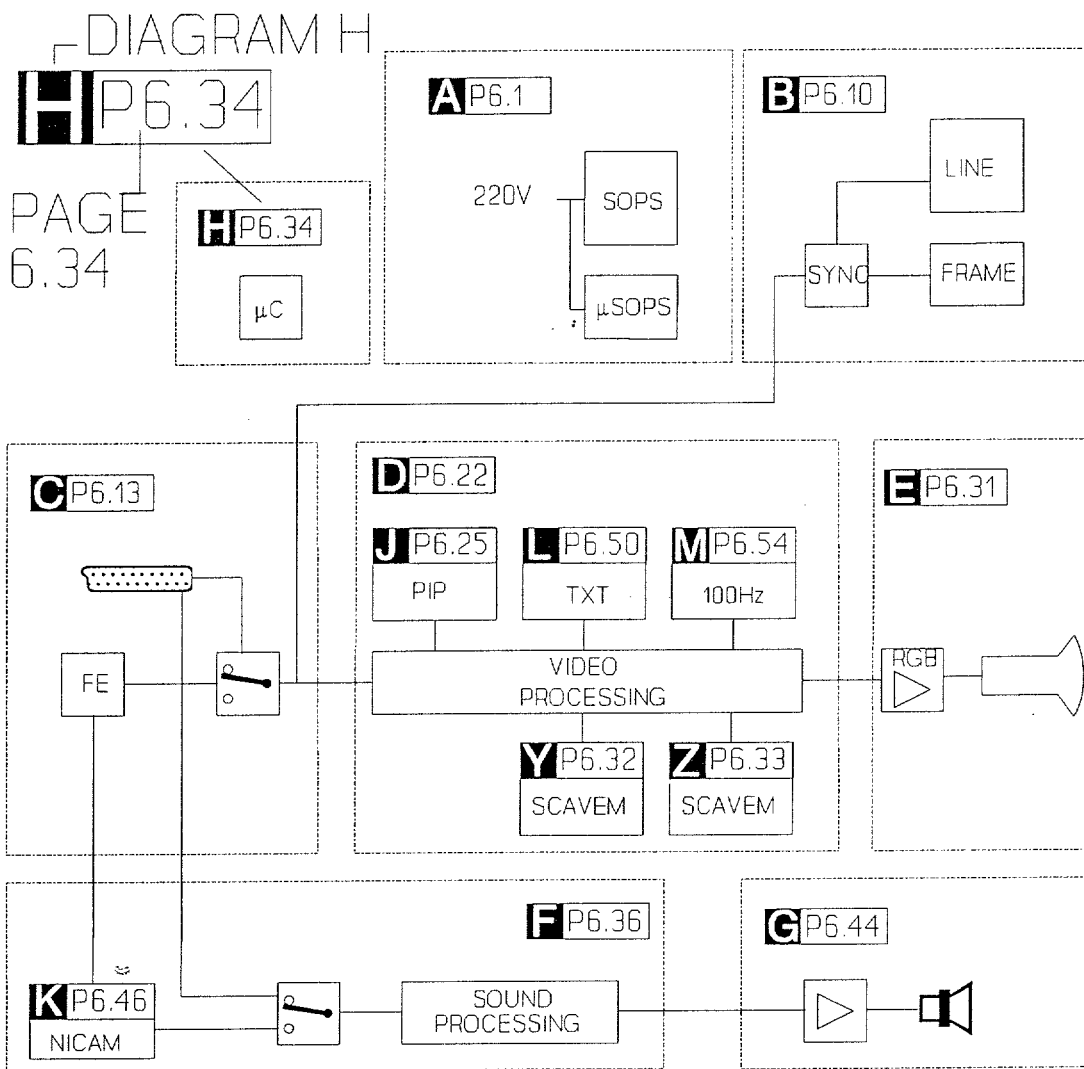


### Technical data

Mains voltage: 220 - 240 V (± 10%) 50 - 60 Hz (± 5%)  
 Aerial input impedance: 75Ω - coax  
 Minimum aerial voltage: 30μV (VHF)/40μV (UHF)  
 Maximum aerial voltage VHF/S/UHF: 180μV  
 Pull-in range colour synchronization: + 300Hz/-300Hz  
 Pull-in range horizontal synchronization: + 200Hz/-300Hz


Programmes: 0-59  
 VCR programmes: 0, 00, 50-59

Local operation functions:

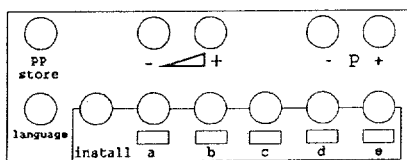


Indications:

- On Screen Display (OSD)
- LED:



## 1. Specification of the connectors


### EXT1 (AUX)



- 1 - Audio  $\oplus$  R (0,5V RMS  $\leq$  1k $\Omega$ )
- 2 - Audio  $\ominus$  R (0,2 - 2V RMS  $\geq$  10k $\Omega$ )
- 3 - Audio  $\oplus$  L (0,5V RMS  $\leq$  1k $\Omega$ )
- 4 - Audio  $\perp$
- 5 - Blue  $\perp$
- 6 - Audio  $\ominus$  L (0,2 - 2V RMS  $\geq$  10k $\Omega$ )
- 7 - Blue (0,7V<sub>pp</sub>/75 $\Omega$ )
- 8 - CVBS-status 1  $\ominus$  0- 2V: int.  
4,5-7V: ext.16:9  
9,5-12V: ext. 4:3
- 9 - Green  $\perp$
- 10 - -
- 11 - Green (0,7V<sub>pp</sub>/75 $\Omega$ )
- 12 - -
- 13 - Red  $\perp$
- 14 - -
- 15 - Red (0,7V<sub>pp</sub>/75 $\Omega$ )
- 16 - RGB-status (0-0,4V: int. 1-3V ext.  
75 $\Omega$ )
- 17 - CVBS  $\perp$
- 18 - CVBS  $\perp$
- 19 - CVBS  $\oplus$  (1V<sub>pp</sub>/75 $\Omega$ )
- 20 - CVBS  $\ominus$  (1V<sub>pp</sub>/75 $\Omega$ )
- 21 - Earthscreen



### EXT2 (VCR)



- 1 - Audio  $\oplus$  R (0,5V RMS  $\leq$  1k $\Omega$ )
- 2 - Audio  $\ominus$  R (0,2 - 2V RMS  $\geq$  10k $\Omega$ )
- 3 - Audio  $\oplus$  L (0,5V RMS  $\leq$  1k $\Omega$ )
- 4 - Audio  $\perp$
- 5 - -
- 6 - Audio  $\ominus$  L (0,2 - 2V RMS  $\geq$  10k $\Omega$ )
- 7 - -
- 8 - CVBS-status 2  $\ominus$  0- 2V: int.  
4,5-7V: ext.16:9  
9,5-12V: ext. 4:3
- 9 - -
- 10 - -
- 11 - -
- 12 - -
- 13 - -
- 14 - -
- 15 - -
- 16 - -
- 17 - CVBS  $\perp$
- 18 - CVBS  $\perp$
- 19 - CVBS  $\oplus$  (1V<sub>pp</sub>/75 $\Omega$ )
- 20 - CVBS  $\ominus$  (1V<sub>pp</sub>/75 $\Omega$ )
- 21 - Earthscreen



### EXT3 (front)

#### SVHS



- 1 -  $\perp$
- 2 -  $\perp$
- 3 - Y  $\ominus$  ( 1V<sub>pp</sub>; 75 $\Omega$ )
- 4 - C  $\ominus$  (0,3V<sub>pp</sub>; 75 $\Omega$ )

- $\oplus$  CINCH Video  $\ominus$  300mV<sub>pp</sub>/75 $\Omega$
- $\oplus$  CINCH Audio  $\ominus$  L (0,5V RMS;  $\geq$  10k $\Omega$ )
- $\oplus$  CINCH Audio  $\ominus$  R (0,5V RMS;  $\geq$  10k $\Omega$ )
- $\oplus$  32-2000 $\Omega$   $\geq$  10mW

#### Audio out

- $\oplus$  CINCH Audio  $\oplus$  L (0,5V RMS;  $\leq$  1k $\Omega$ )
- $\oplus$  CINCH Audio  $\oplus$  R (0,5V RMS;  $\leq$  1k $\Omega$ )



front : 2 x 16W / 8 $\Omega$   
rear : 2 x 6W / 8 $\Omega$

### EXT2' (SVHS)

#### SVHS



- 1 -  $\perp$
- 2 -  $\perp$
- 3 - Y  $\ominus$  ( 1V<sub>pp</sub>; 75 $\Omega$ )
- 4 - C  $\ominus$  (0,3V<sub>pp</sub>; 75 $\Omega$ )

- $\oplus$  CINCH Audio  $\ominus$  L (0,5V RMS;  $\geq$  10k $\Omega$ )
- $\oplus$  CINCH Audio  $\ominus$  R (0,5V RMS;  $\geq$  10k $\Omega$ )

#### SVHS



- 1 -  $\perp$
- 2 -  $\perp$
- 3 - Y  $\ominus$  ( 1V<sub>pp</sub>; 75 $\Omega$ )
- 4 - C  $\ominus$  (0,3V<sub>pp</sub>; 75 $\Omega$ )

- $\oplus$  CINCH Audio  $\ominus$  L (0,5V RMS;  $\leq$  1k $\Omega$ )
- $\oplus$  CINCH Audio  $\ominus$  R (0,5V RMS;  $\leq$  1k $\Omega$ )

## 2. Connection of equipment

When an SVHS source is connected to EXT2'(SVHS) or EXT3 (SVHS) the CVBS at these inputs is switched off. To reproduce the CVBS signal from these inputs, the particular SVHS plug must first be removed.

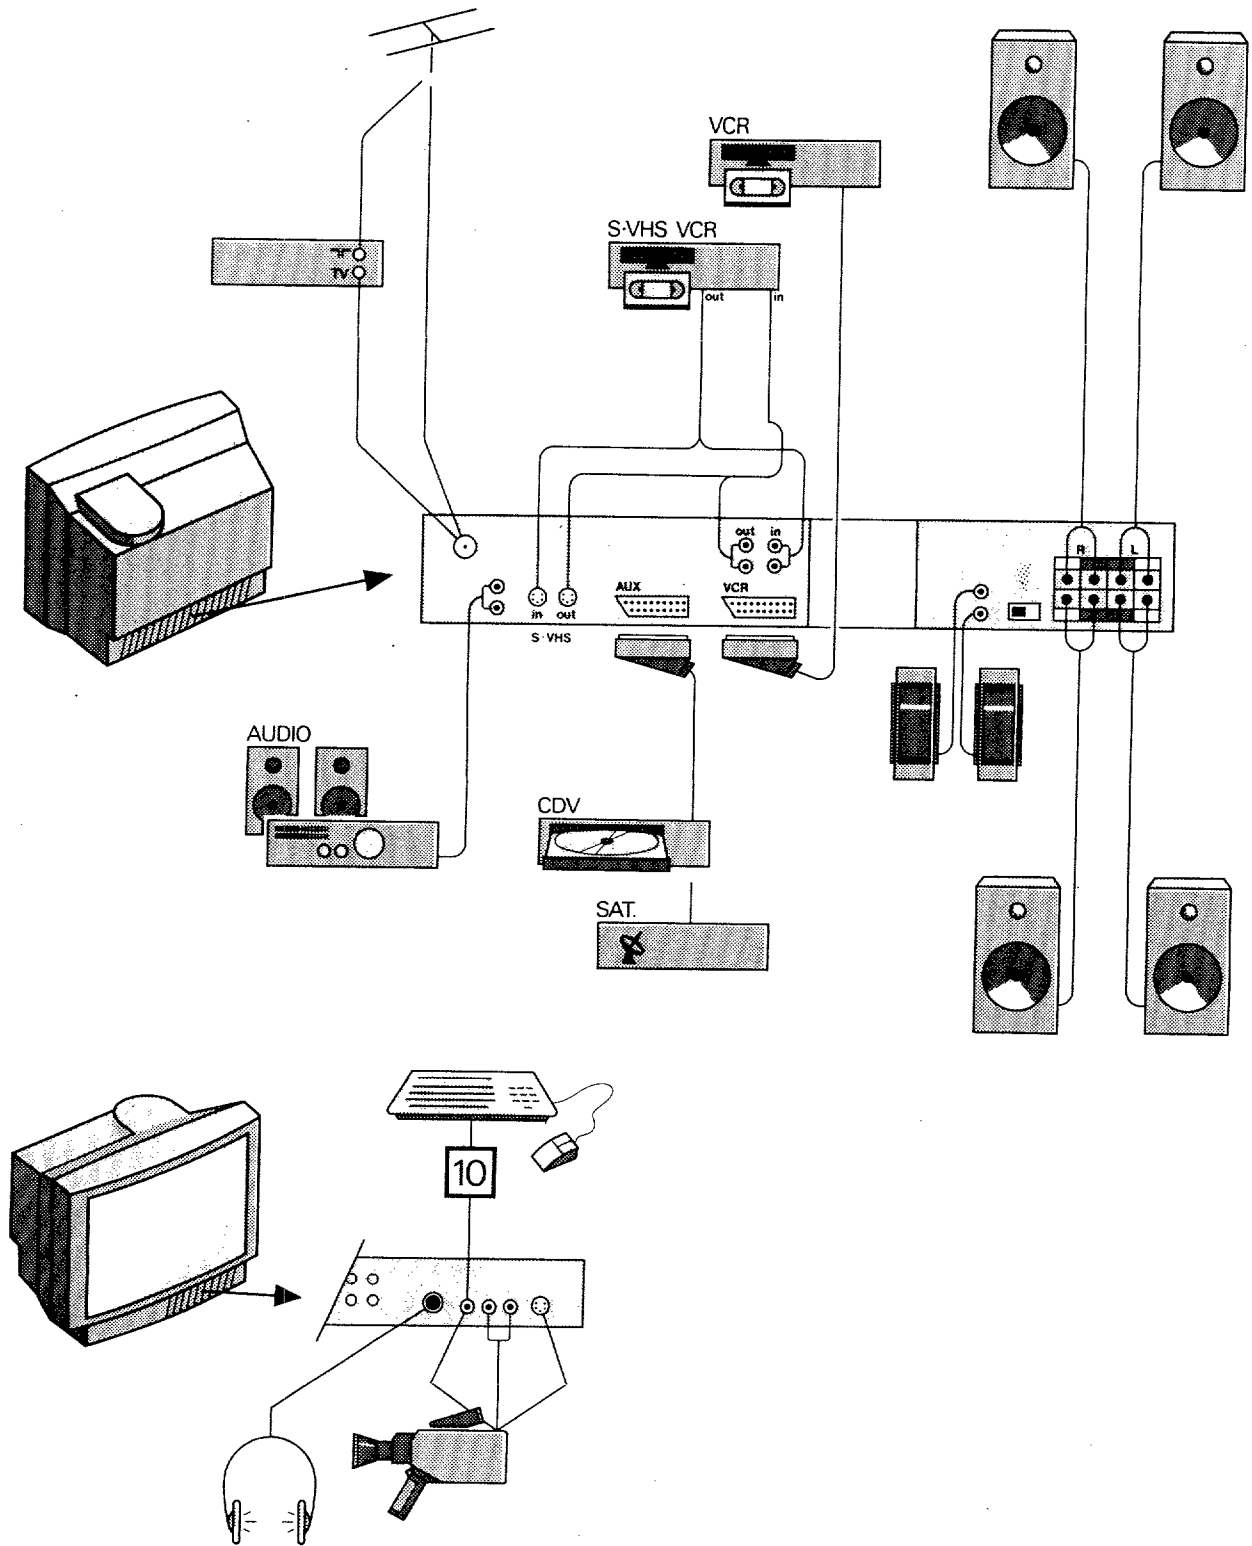




Fig. 2.1

1. Safety regulations require that the unit should be returned in its original condition and that components identical to the original components are used. The safety components are indicated by the symbol 
2. In order to prevent damage to ICs and transistors, all high-voltage flashovers must be avoided. In order to prevent damage to the picture tube, the method shown in Fig. 3.1 should be used to discharge the picture tube. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is 0V (after approx. 30s).
3. **ESD**  All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten the life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.
4. When repairing a unit, always connect it to the mains voltage via an isolating transformer.
5. Be careful when taking measurements in the high-voltage section and on the picture tube.
6. Never replace modules or other components while the unit is switched on.
7. It is recommended that safety goggles are worn when replacing the picture tube.
8. When making settings, use plastic rather than metal tools. This will prevent any short circuits and the danger of a circuit becoming unstable.
9. After repair the wiring should be fastened once more in the cable clamps for this purpose.
10. In order to prevent measuring errors, the heat sinks should not be used as reference points for measurements. **The heat sink for the sound output amplifier (next to the channel selector) is connected to the -11 volts.**
11. On this unit the 140 volt supply voltage is not supplied via an interconnection on the deflection yoke to the line output transformer. When the deflection cable is detached, the +140 volt supply remains loaded. In order to unload the +140 volts, coil 5511 should be removed.
12. Together with the deflection unit and any multipole unit, the flat square picture tubes used form an integrated unit. The deflection and the multipole units are set optimally at the factory. Adjustment of this unit during repair is therefore not recommended.

1. The direct voltages and oscillograms should be measured with regard to the tuner earth ( $\perp$ ), or hot earth ( $\perp$ ) as this is called.
2. The direct voltages and oscillograms shown in the diagrams should be measured in the **Service Default Mode** (see chapter 8) with a colour bar signal and stereo sound (L: 3 kHz, R: 1 kHz unless stated otherwise) and picture carrier at 475.25 MHz.
3. Where necessary, the oscillograms and direct voltages are measured with ( $\perp$ ) and without aerial signal ( $\times$ ). Voltages in the power supply section are measured both for normal operation ( $\textcircled{D}$ ) and in standby ( $\textcircled{S}$ ). These values are indicated by means of the appropriate symbols.
4. The picture tube PCB has printed spark gaps. Each spark gap is connected between an electrode of the picture tube and the Aquadag coating.
5. The semiconductors indicated in the circuit diagram and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.
6. The connectors used for the modules (board to board) are gold-plated and should only be replaced by the same type.
7. In the case of error searching and/or repair to the PIP module, the accessibility of the circuit and the components can be increased by using extension cards.  
5 times: 4822 395 30261  
10 times: 4822 395 30257

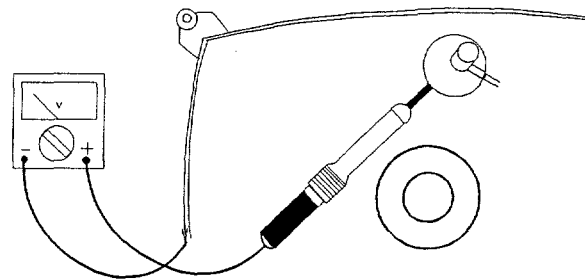


Fig 3.1

## Mechanical instructions

## 1. Removing the back plate

Remove cover A (Fig. 4.1) from the back plate.  
Remove connector B (LI36) of the subwoofer.  
Remove attachment screws C from the back plate.  
Remove the back plate with the subwoofer fitted in it. Attach the back plate by carrying out the above in the reverse order.

## 2. Service position to measure test points (Fig. 4.2)

Unlock the chassis panels by pressing locks D.  
Pull both chassis panels backwards at the same time until all measuring points are accessible.

## 3. Service position for repair (Fig. 4.3)

Remove the LED display E (see Fig. 4.2) of the large signal panel.  
Tilt the back of the two panels and attach both panels using brackets F situated on the underside of the small signal panel, at an angle of 90° to one another.

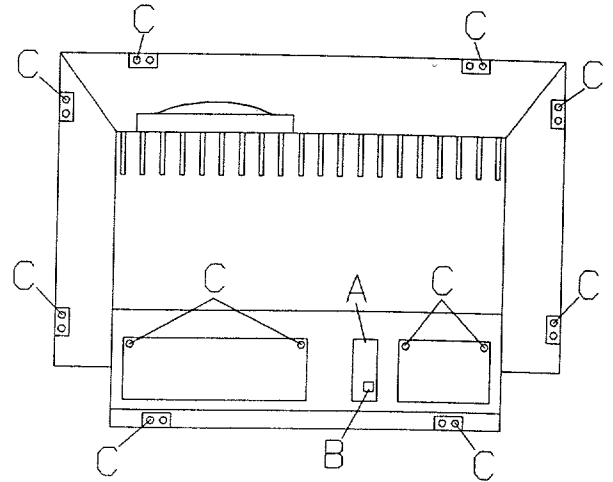


Fig 4.1

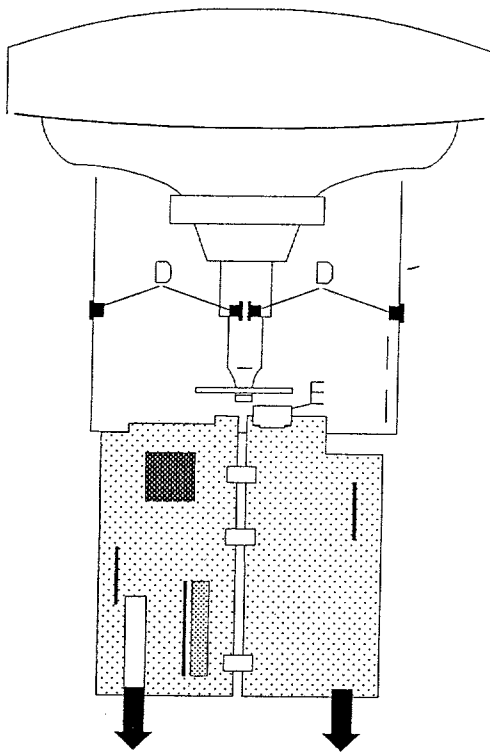


Fig 4.2





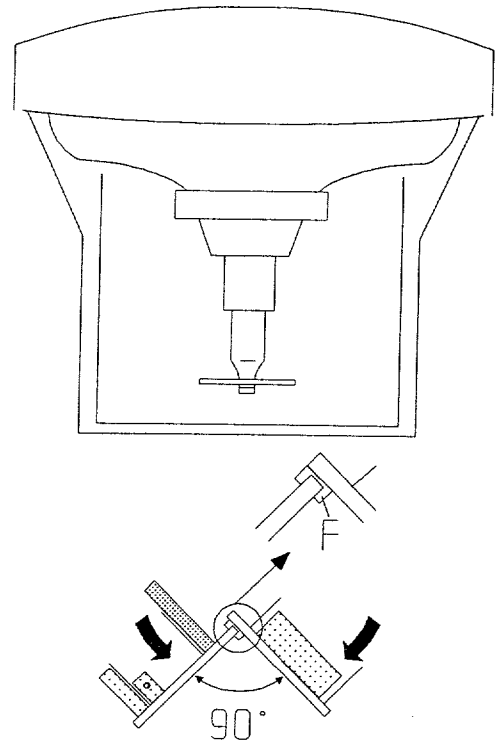


Fig 4.3

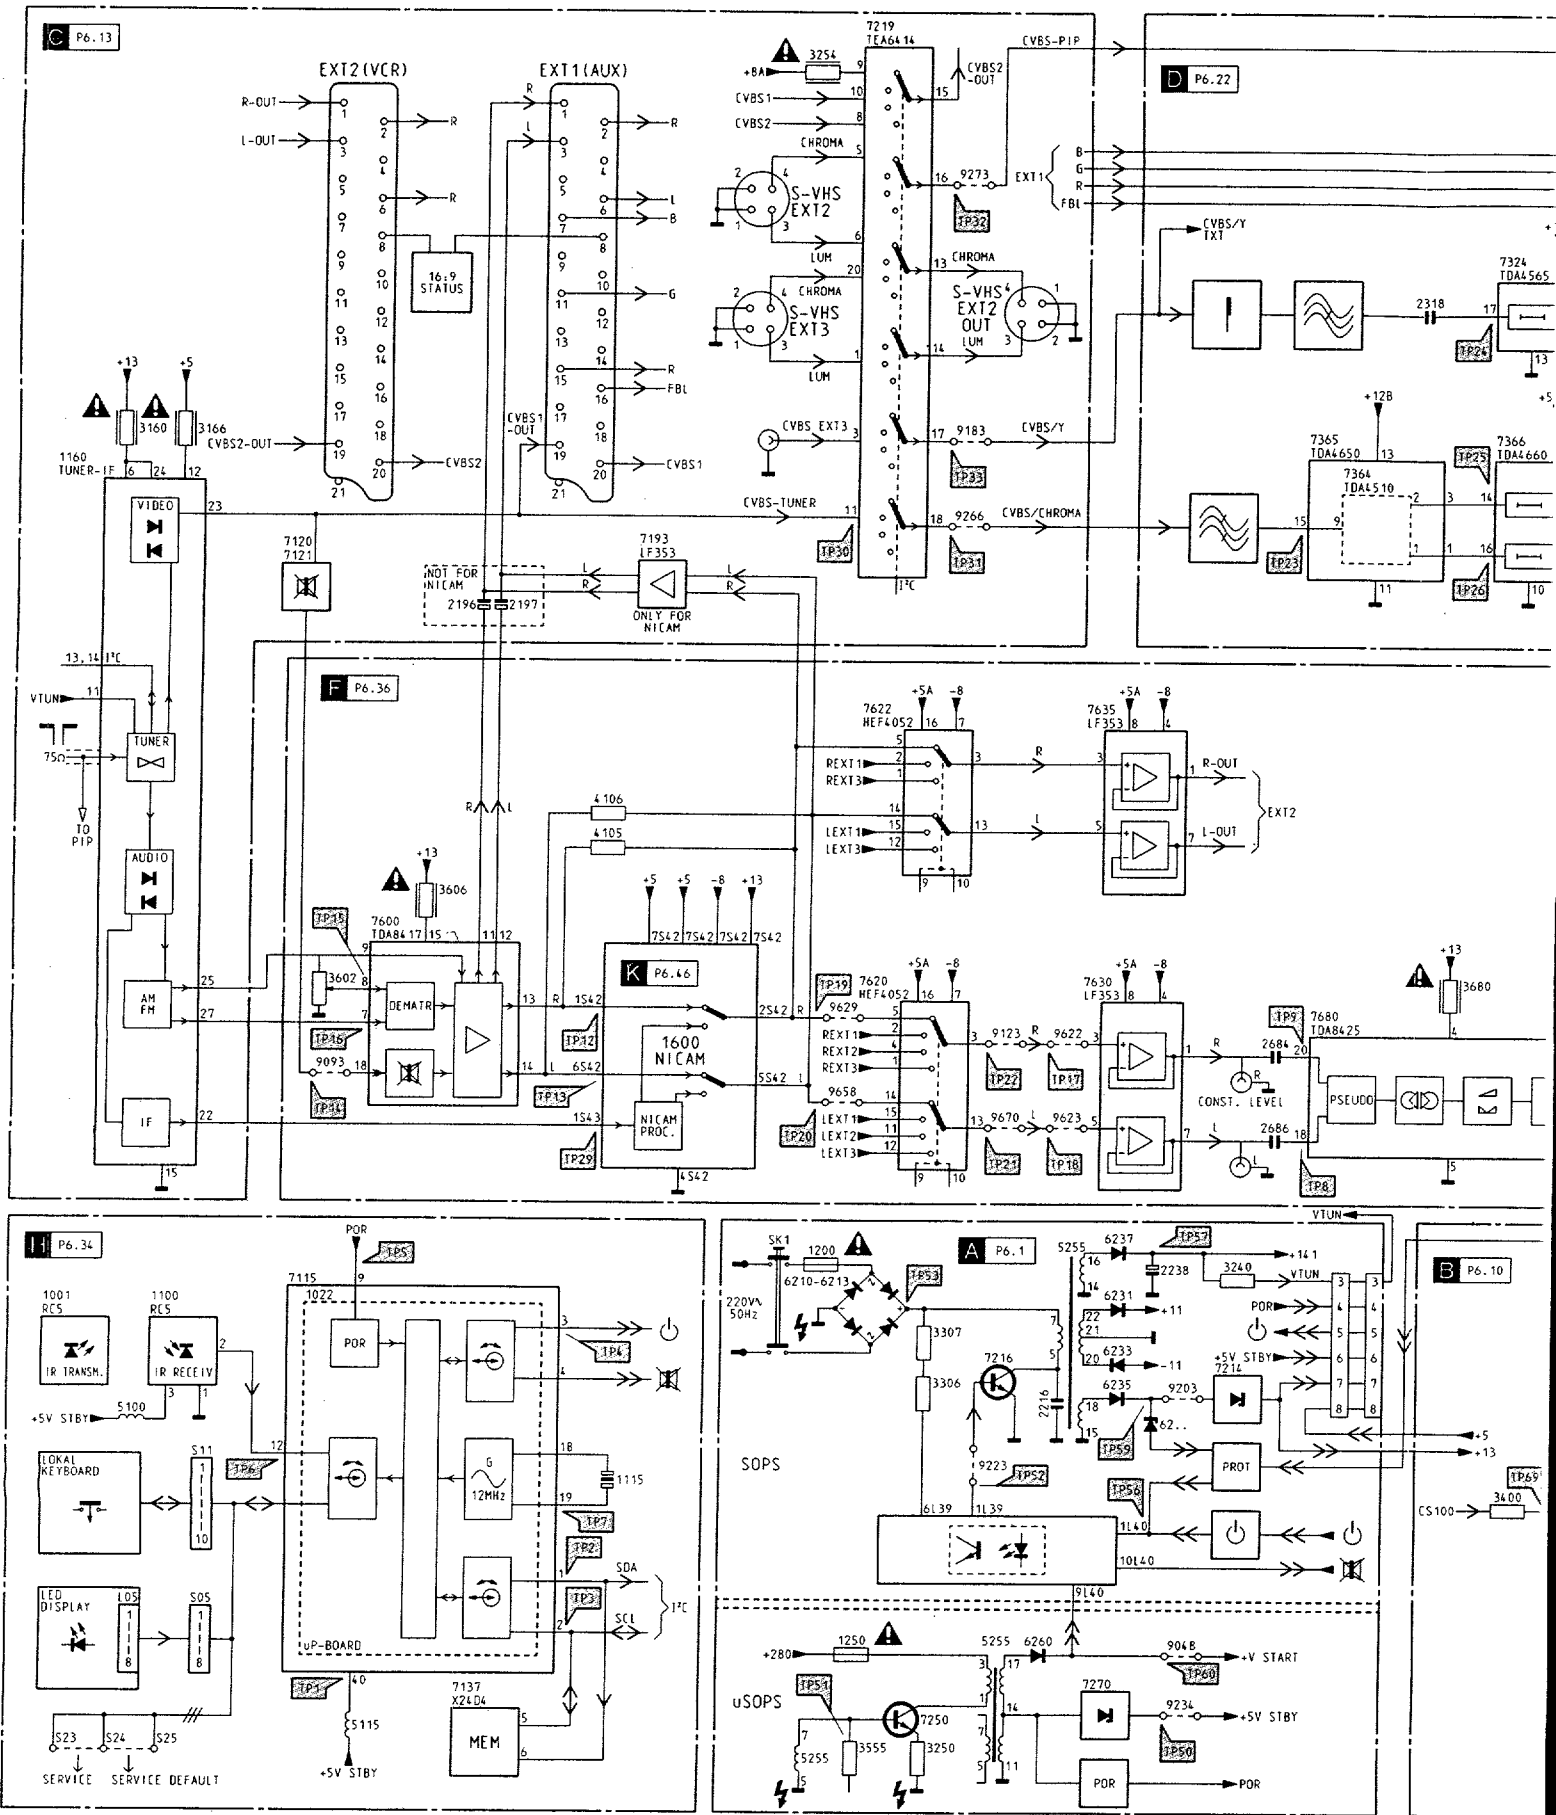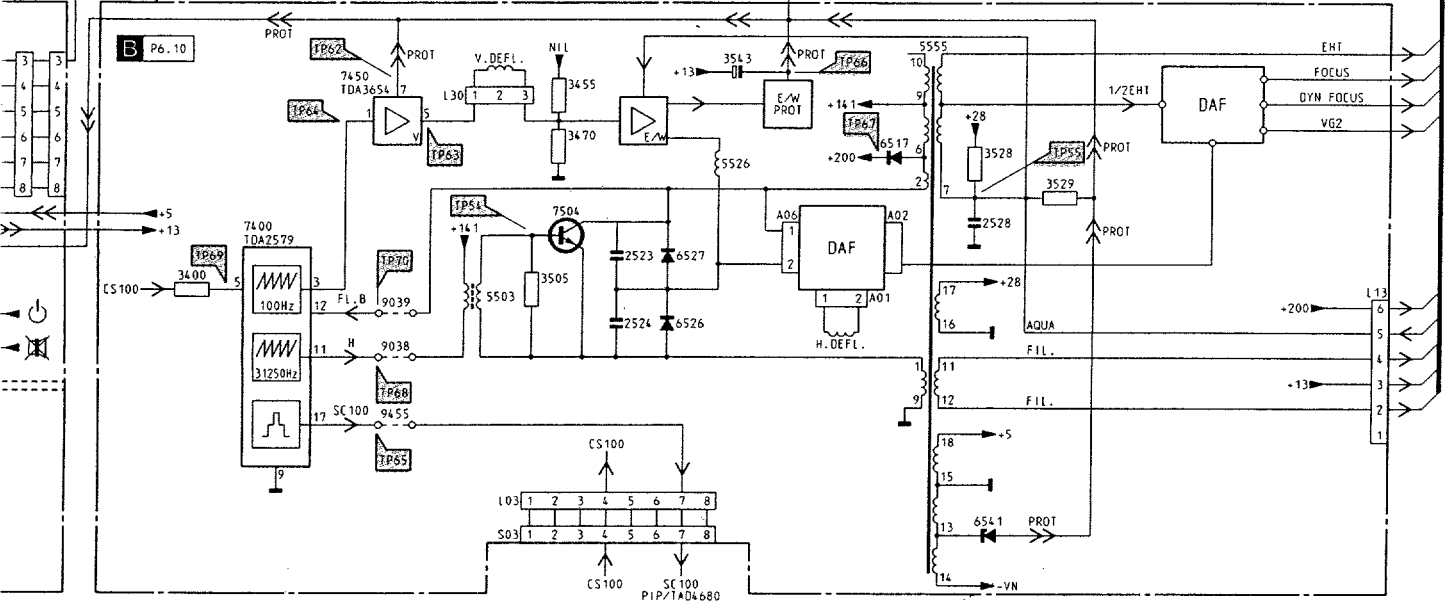


# Diagramme schématique

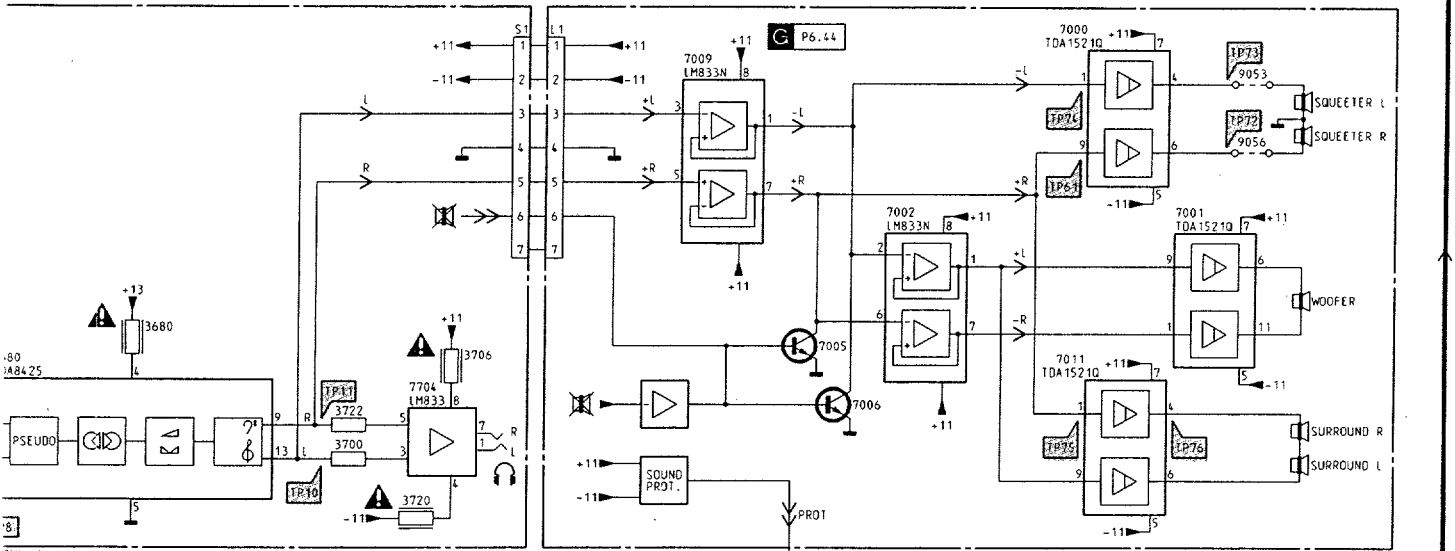

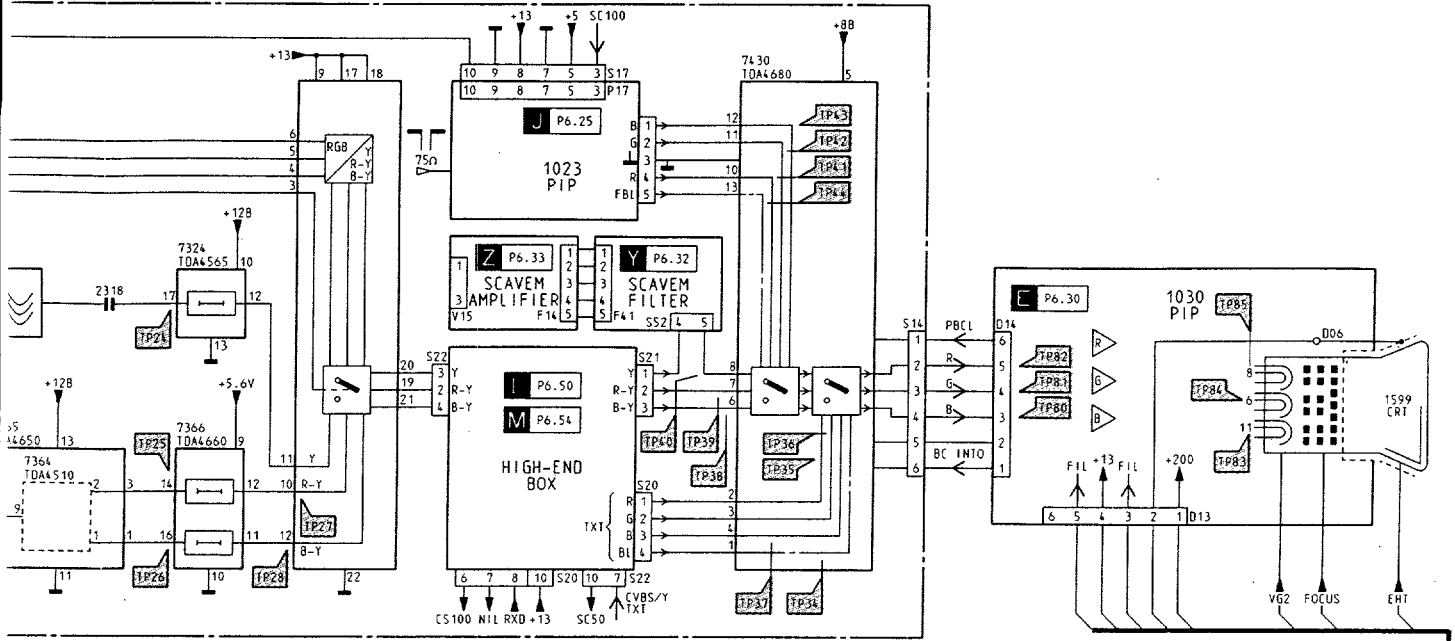


Small signal panel  
 Klein-signal Platte  
 Platine petits signaux

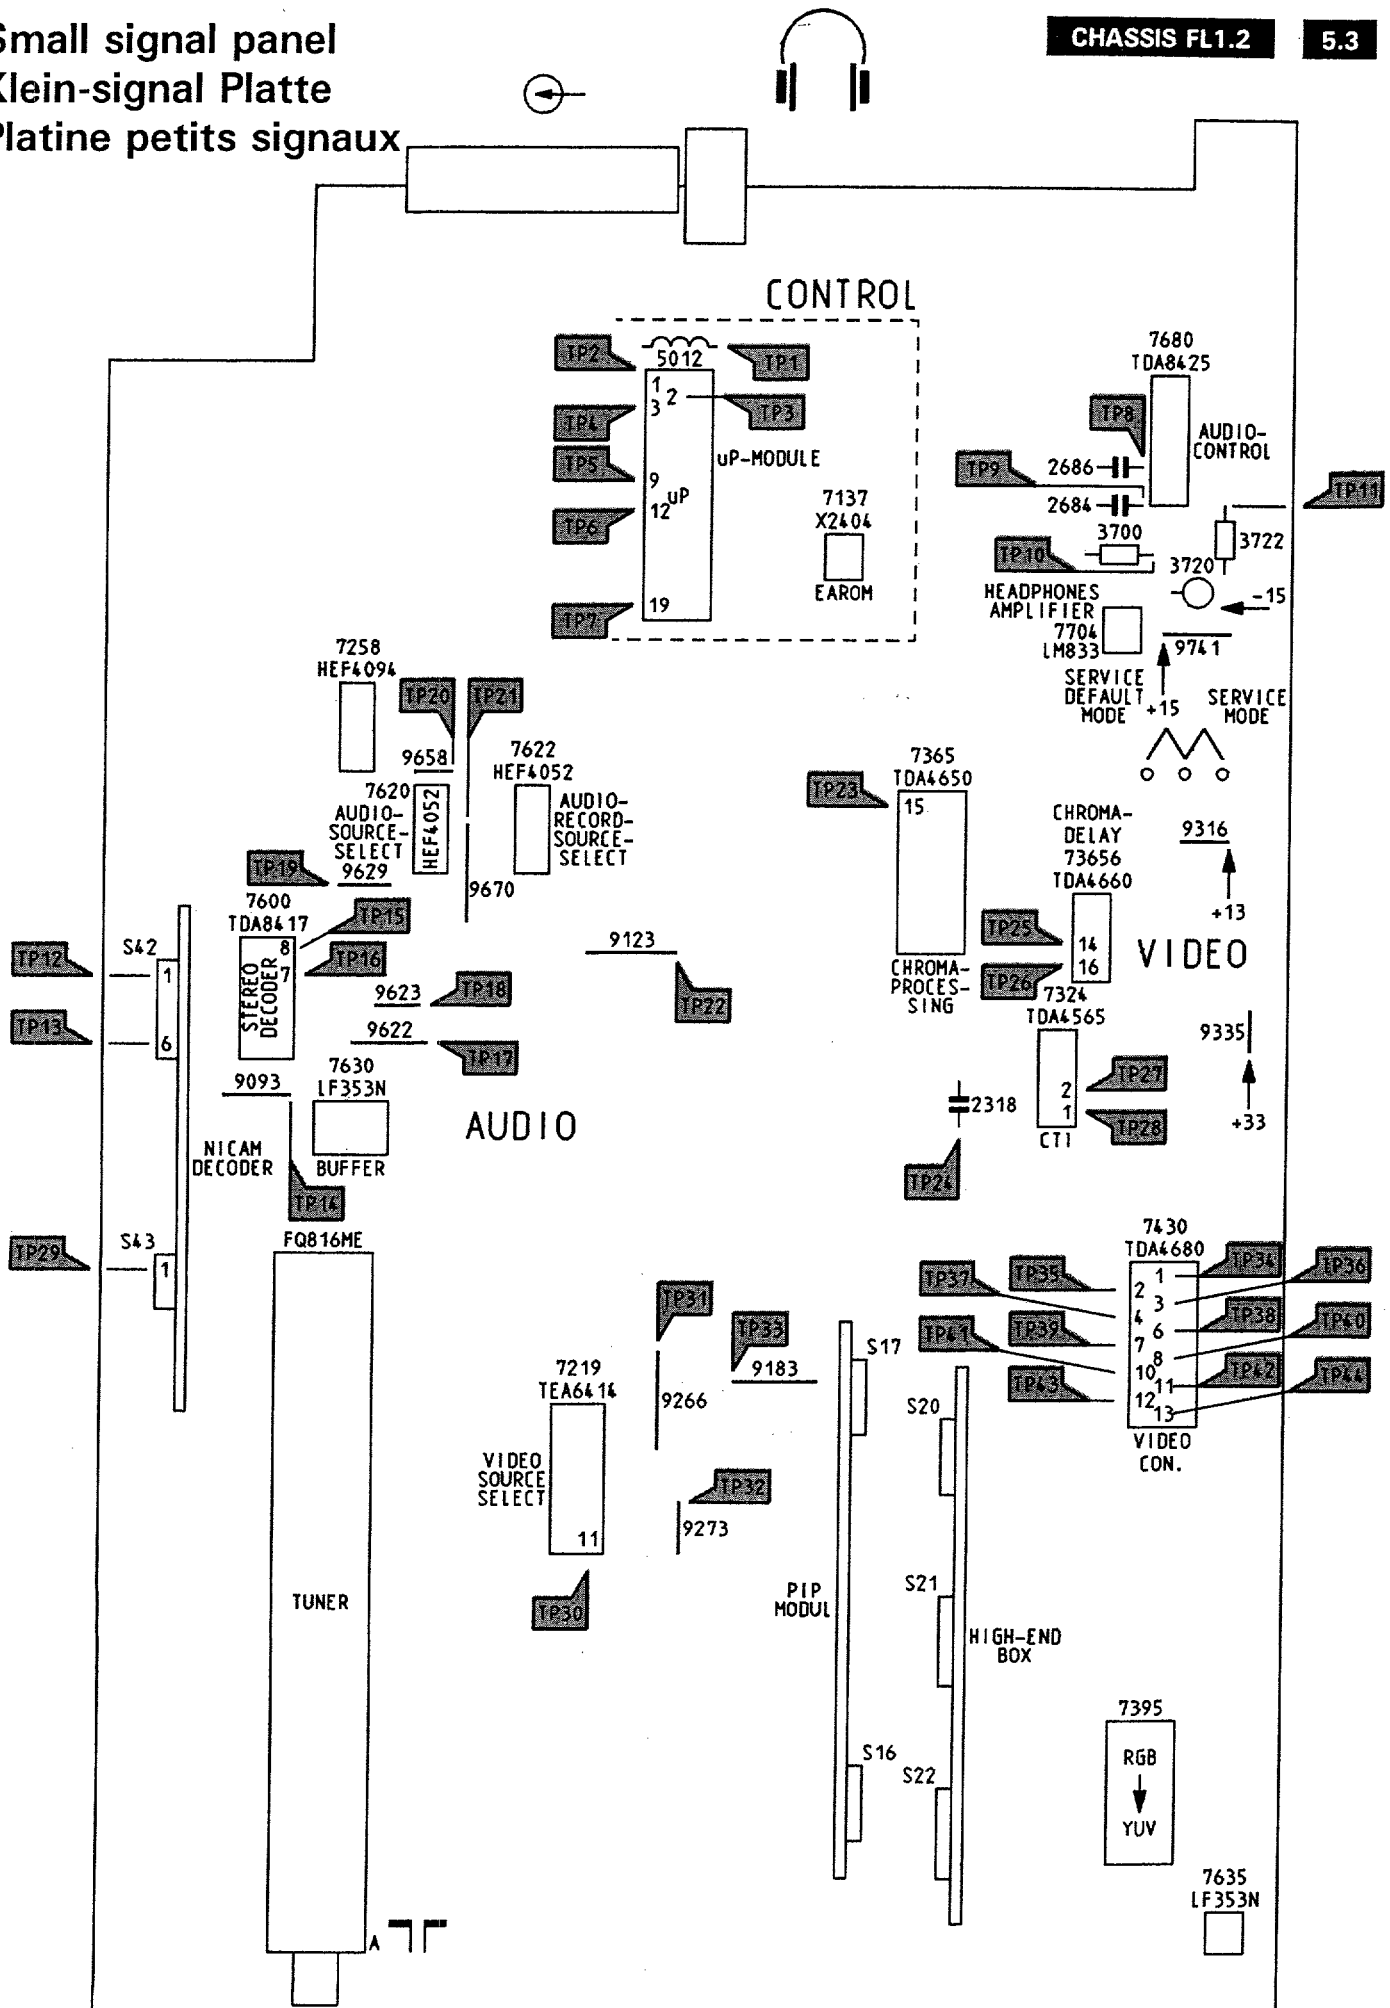



# Oscilloscopes

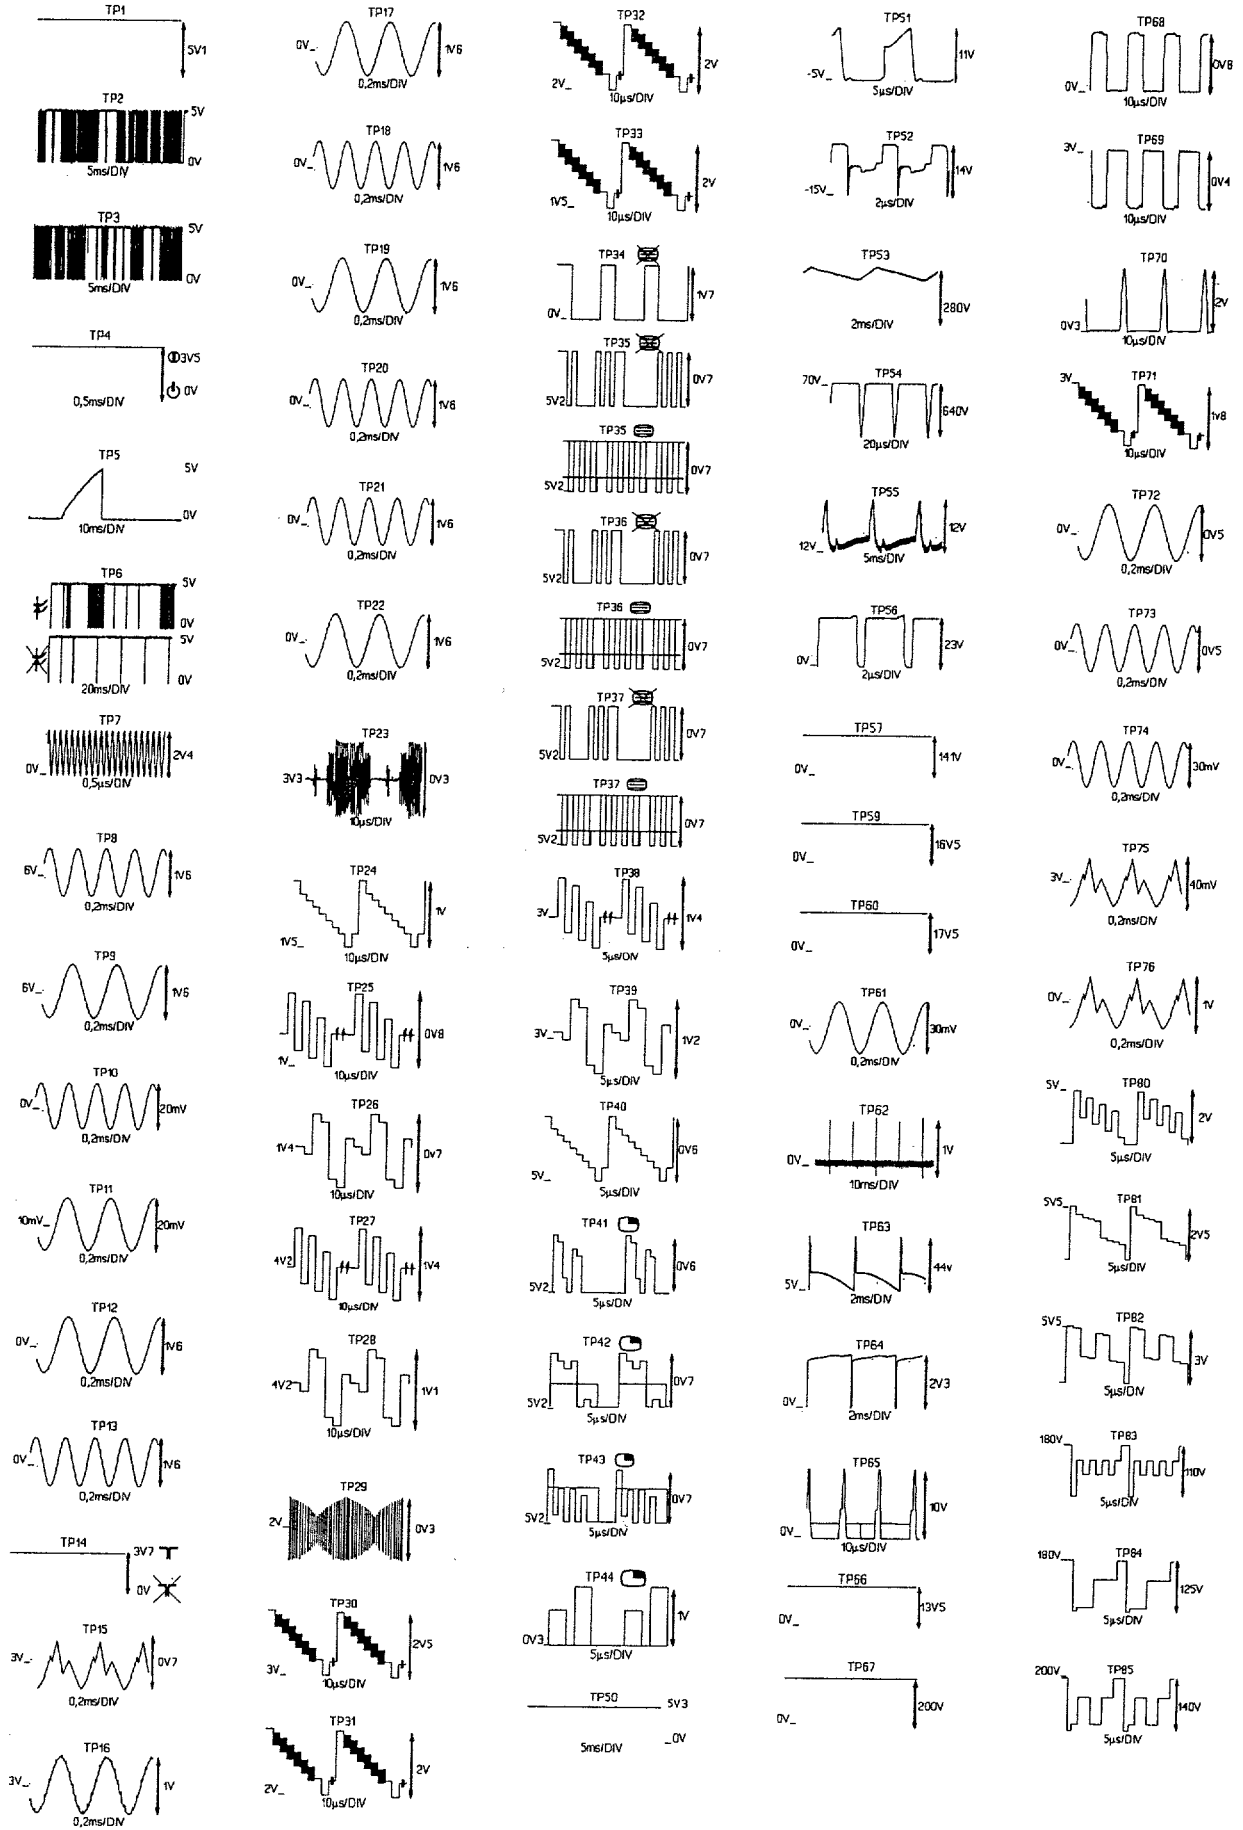




# Alimentation

CHASSIS FL1.2

6.2

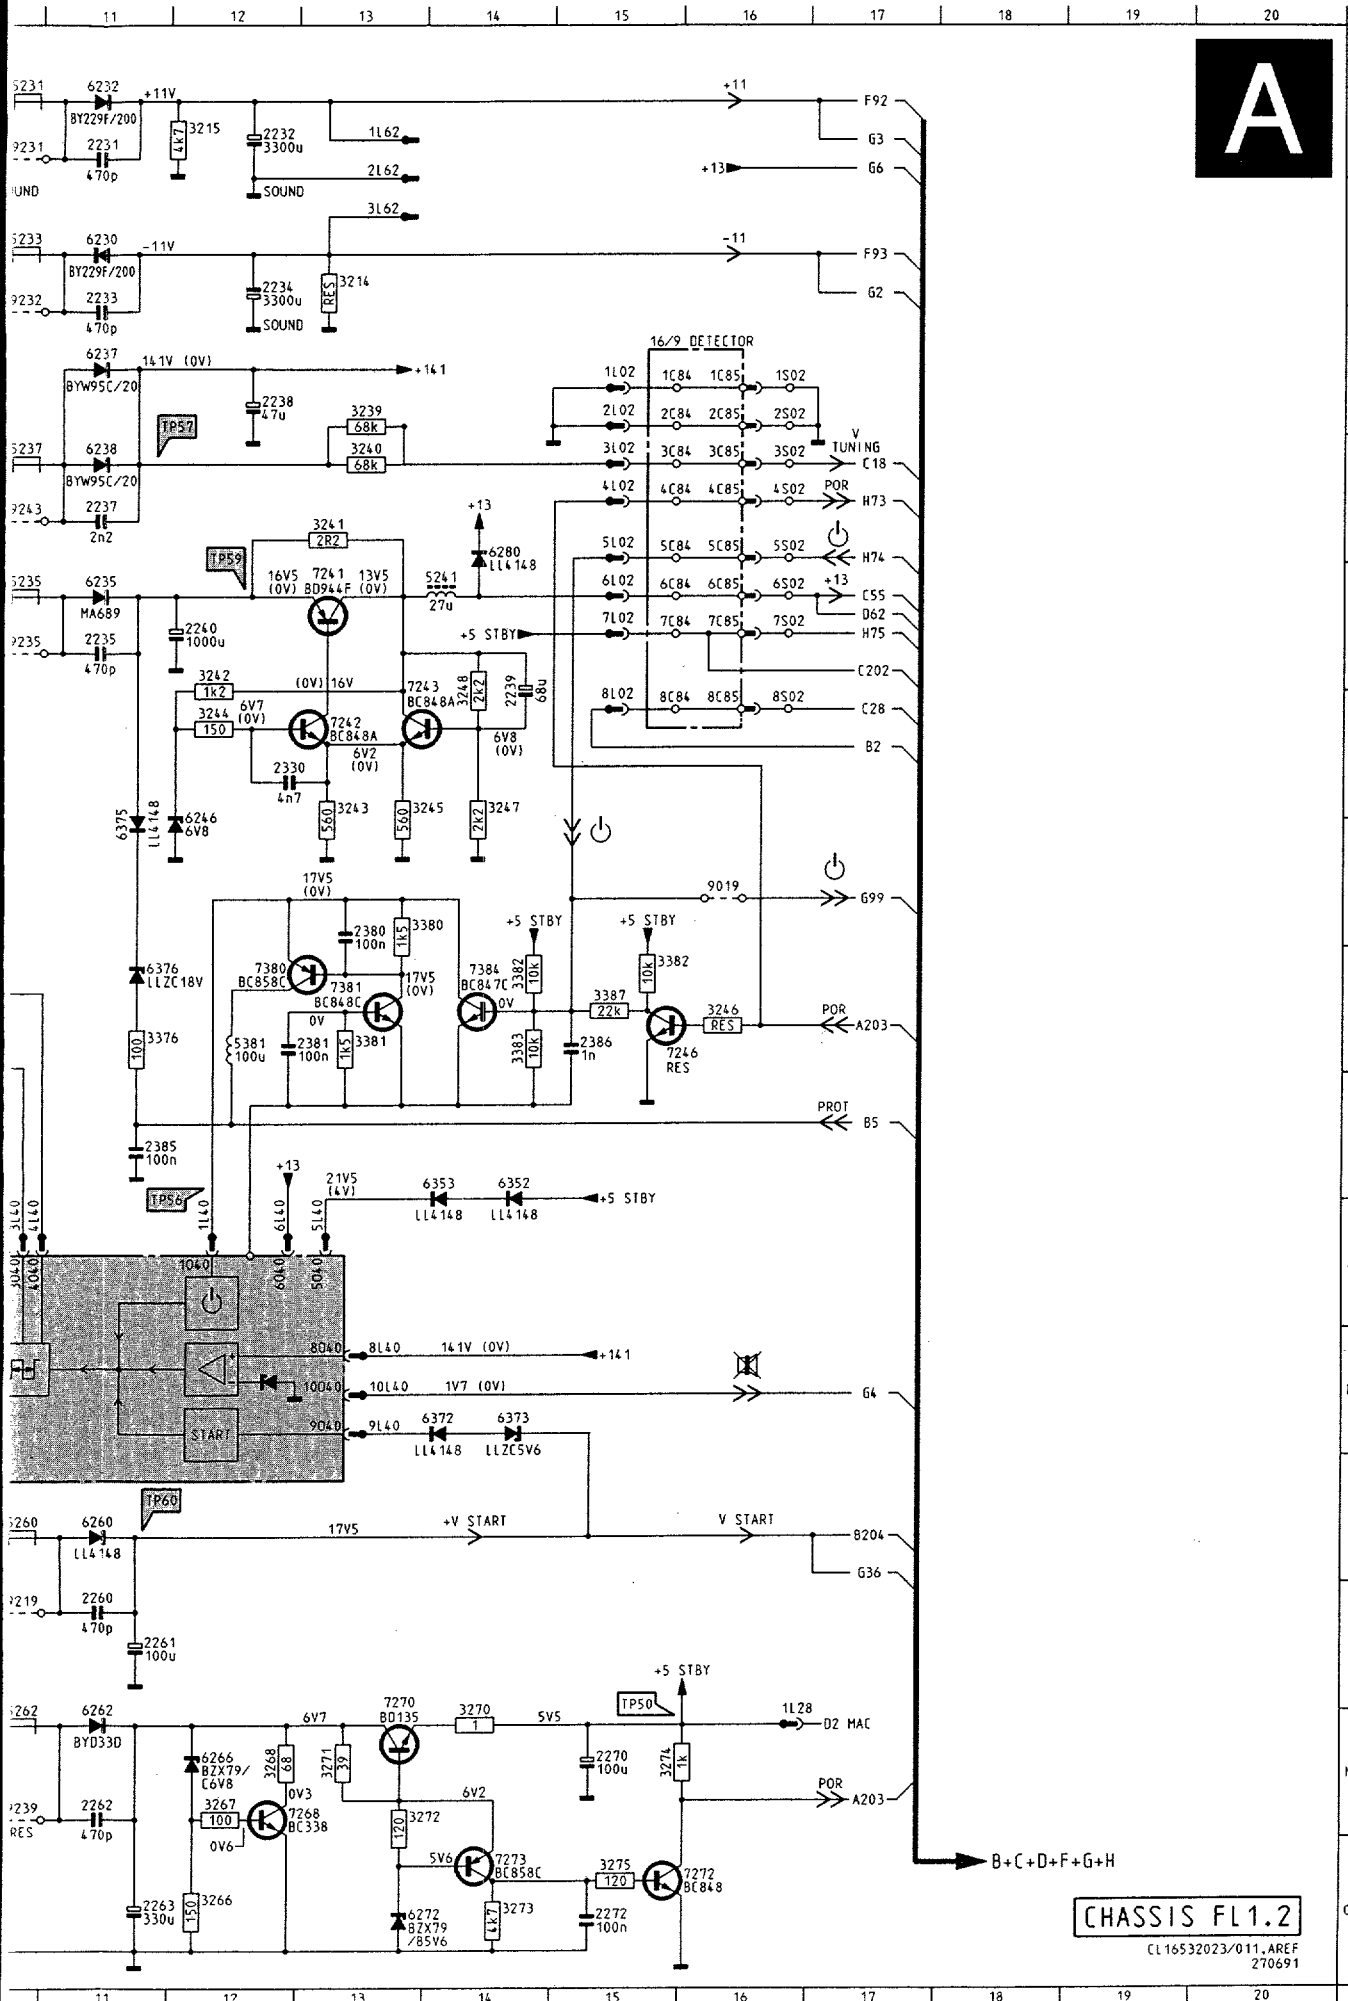






















1200	B 2	6352	I 14
1250	L 8	6353	I 14
2200	C 2	6372	K 14
2202	B 3	6373	K 14
2203	B 4	6375	G 11
2205	B 3	6376	H 11
2210	B 8	7201	N 6
2211	C 8	7216	F 8
2214	D 9	7241	E 13
2215	I 6	7242	F 13
2216	F 9	7243	F 13
2218	E 9	7246	H 15
2231	A 11	7250	N 7
2232	A 12	7251	N 8
2233	B 11	7268	M 12
2234	B 12	7270	M 13
2235	E 11	7272	O 16
2237	D 11	7273	O 14
2238	C 12	7321	I 8
2239	E 14	7380	H 12
2240	E 12	7381	H 13
2250	N 7	7384	H 14
2254	M 9	9019	G 16
2255	N 9	9204	A 4
2258	O 5	9205	B 6
2260	M 11	9206	C 6
2261	M 11	9207	B 3
2262	M 11	9208	C 3
2263	O 11	9218	B 5
2270	M 15	9219	M 10
2272	O 15	9223	H 7
2330	F 12	9231	A 10
2380	G 13	9232	B 10
2381	H 12	9235	E 10
2385	I 11	9239	N 10
2386	H 15	9242	A 6
3201	D 1	9243	D 10
3202	I 6		
3203	C 5		
3204	B 5		
3204	C 5		
3209	C 6		
3210	C 7		
3211	B 7		
3212	N 5		
3213	O 5		
3214	B 13		
3215	A 12		
3216	G 9		
3239	C 13		
3240	D 13		
3241	D 13		
3242	E 12		
3243	F 13		
3244	F 12		
3245	F 13		
3246	H 16		
3247	F 14		
3248	E 14		
3249	M 8		
3250	O 7		
3251	N 7		
3252	L 8		
3253	L 9		
3255	N 9		
3266	O 12		
3267	N 12		
3268	N 12		
3270	N 14		
3271	N 13		
3272	N 13		
3273	O 14		
3274	N 15		
3275	O 15		
3306	H 7		
3376	H 11		
3380	G 13		
3381	H 13		
3382	H 14		
3382	H 15		
3383	H 14		
3387	H 15		
5202	C 3		
5203	A 5		
5204	A 4		
5205	C 3		
5230	A 9		
5231	A 10		
5233	B 10		
5235	E 10		
5237	D 10		
5241	E 14		
5255	L 9		
5260	L 10		
5262	N 10		
5381	H 12		
6201	O 8		
6210	C 8		
6211	C 8		
6212	C 9		
6213	B 9		
6216	G 8		
6230	B 11		
6232	A 11		
6235	E 11		
6237	C 11		
6238	D 11		
6246	G 12		
6251	O 8		
6260	L 11		
6262	N 11		
6266	N 12		
6272	O 13		
6280	D 14		
6306	H 7		
6321	I 8		

CHASSIS FL1.2

CL 16532023/011,AREF 270691

6.3 CHASSIS FL1.2


- 6352 I14
- 6353 I14
- 6372 K14
- 6373 K14
- 6375 G11
- 6376 H11
- 7201 N 6
- 7216 F 8
- 7241 E13
- 7242 F13
- 7243 F13
- 7246 H15
- 7250 N 7
- 7251 N 8
- 7268 N12
- 7270 M13
- 7272 O16
- 7273 O14
- 7321 I 8
- 7380 H12
- 7381 H13
- 7384 H14
- 9019 G16
- 9204 A 4
- 9205 B 6
- 9206 C 6
- 9207 B 3
- 9208 C 3
- 9218 B 5
- 9219 M10
- 9223 H 7
- 9231 A10
- 9232 B10
- 9235 E10
- 9239 N10
- 9242 A 6
- 9243 D10











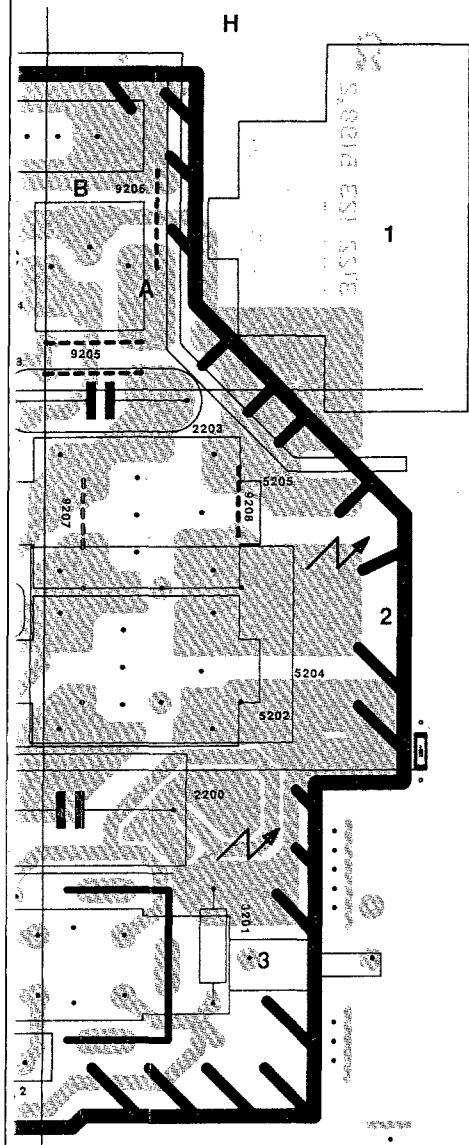


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 C4	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4802 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4803 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4804 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 E3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F3
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9228 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7268 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7272 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7380 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5381 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5503 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9240 B4
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9241 E3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9242 G2
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7444 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7469 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 F2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9453 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5543 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2060 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3552 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E5	9026 F5	9543 C2
2215 G4	2632 B3	3407 B3	3607 B2	6353 E5	9020 D5	9544 D1
2216 G5	2633 B2	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F5	3000 D4	3410 B3	3610 F1	6375 E3	9023 A4	9549 E1
2219 F5	3001 D5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2231 E4	3002 B5	3412 B2	3613 B2	6402 B3	9025 A4	9557 E2
2232 E5	3003 B5	3413 B3	3615 F1	6403 C3	9027 A5	9614 E2
2233 E4	3004 C5	3414 B3	3616 F1	6404 C3	9028 A5	9615 B2
2234 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9602 B4
2235 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9603 B3
2236 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	L01 F1
2237 E3	3009 C5	3418 B3	3620 F1	6451 B1	9032 C5	L02 E1
2238 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L03 A1
2239 B4	3012 C5	3421 B3	3623 E1	6480 B1	9035 A1	L06 C2
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A4	L13 C4
2254 F2	3014 D4	3424 B2	3626 A2	6515 C3	9037 B3	L27 B3
2255 F3	3016 B5	3426 A2	3627 B4	6517 C3	9038 B3	L30 A1
2256 F3	3019 B5	3428 C3	3630 B3	6519 E2	9041 C2	L32 D3
2260 E3	3020 B5	3429 B3	3632 C3	6520 E2	9042 C4	L32 G2
2261 E3	3021 B5	3430 B3	3633 B3	6527 C1	9043 D5	L34 G2
2262 E3	3022 B6	3437 B1	3638 B3	6529 F1	9044 A5	L35 G3
2263 E2	3023 C5	3438 B3	3640 B4	6534 D3	9045 D4	L36 A2
2270 G1	3024 C5	3439 B2	3642 B3	6536 C3	9046 D4	L37 A3
2272 G2	3026 D5	3440 B3	3643 B3	6537 C3	9047 E5	L38 A2
2330 B4	3027 A5	3442 B3	3644 B2	6542 C3	9048 D4	L38 F3
2380 E3	3028 A5	3443 A2	4000 A5	6546 C2	9050 A4	L40 E3
2381 E3	3029 D5	3444 B2	4001 D5	6547 D3	9051 D4	L41 G1
2382 E3	3030 D5	3450 A1	4003 A5	6551 D4	9052 D4	L61 G2
2386 E3	3031 D5	3451 A1	4004 C5	6601 E1	9053 D5	L65 G2
2401 B3	3032 D5	3455 A1	4005 C5	6611 B2	9054 D4	L66 D1
2402 B2	3033 D4	3456 A2	4006 D5	6801 B4	9055 A4	L70 A2
2403 A2	3034 D4	3457 A2	4007 C5	6802 B4	9056 A4	L80 G4
2404 A2	3035 C5	3458 A1	4074 A5	6803 B4	9057 C4	L90 C3
2405 A2	3036 D4	3459 A1	4200 E3	6804 B4	9058 G2	SK1 G3
2406 B3	3037 D4	3460 B1	4402 C4	7000 C5	9059 G1	SK2 A3
2407 B2	3040 A5	3461 A1	4403 A2	7001 D5	9060 G1	
2408 C3	3041 A5	3462 A1	4406 B2	7002 C5	9063 B5	
2409 B2	3043 C4	3463 A1	4407 B1	7003 A5	9064 B5	
2410 B2	3044 A5	3464 A2	4408 B4	7004 A5	9065 B4	
2411 B2	3049 G1	3465 A2	4409 B4	7005 D5	9066 B5	
2412 C3	3050 G1	3466 A1	4415 E2	7006 D5	9067 A3	
2413 C3	3051 G1	3467 B2	4460 B1	7007 D5	9203 D4	
2415 A3	3052 G1	3468 A2	4461 B2	7008 D5	9205 H1	
2416 B3	3053 G1	3469 A1	4508 B2			

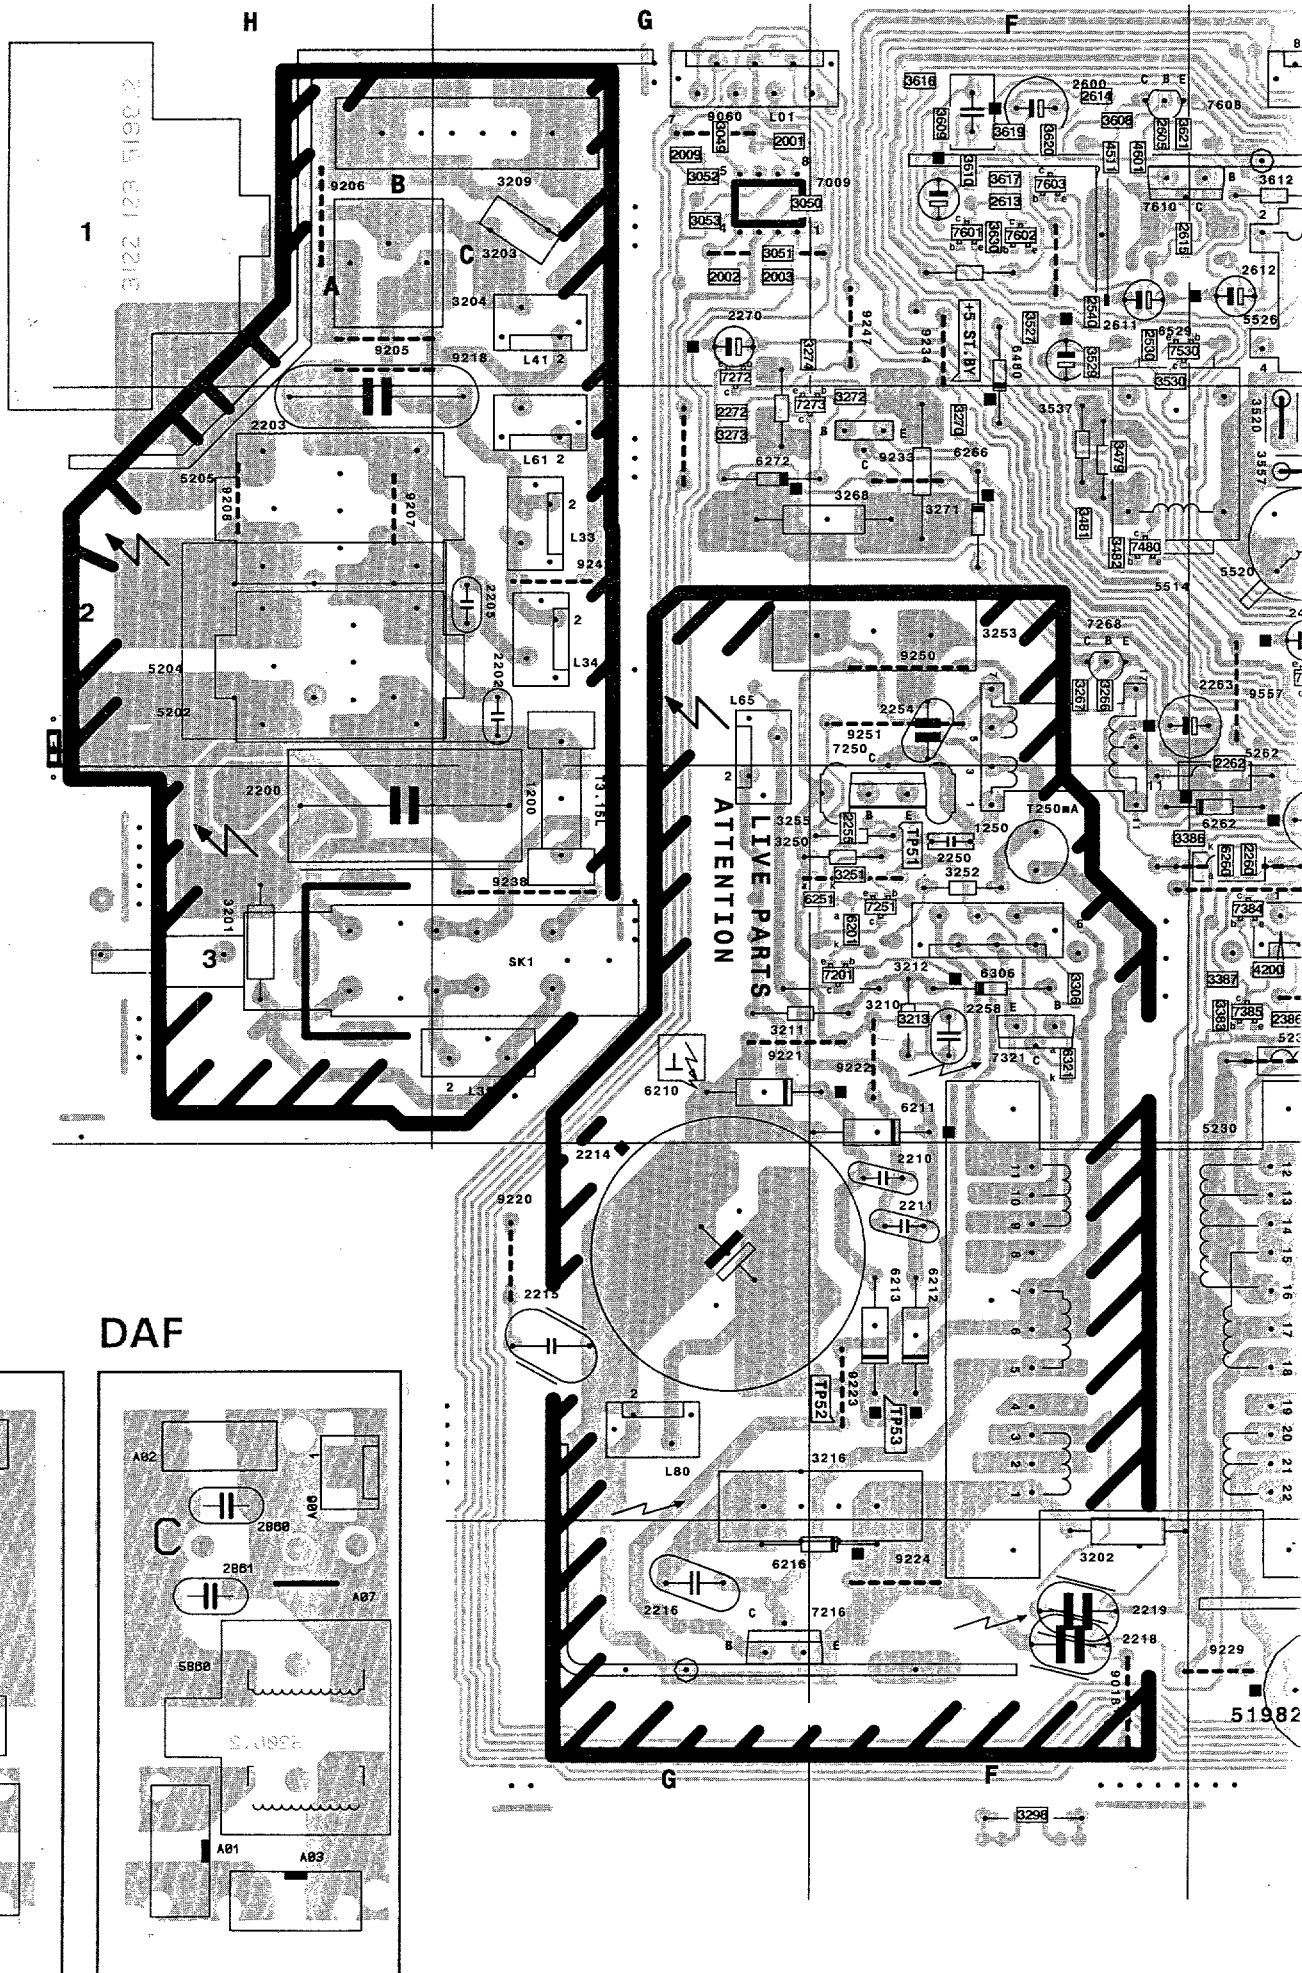


DAF

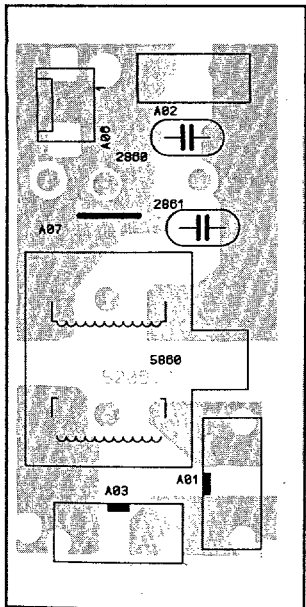


DAF

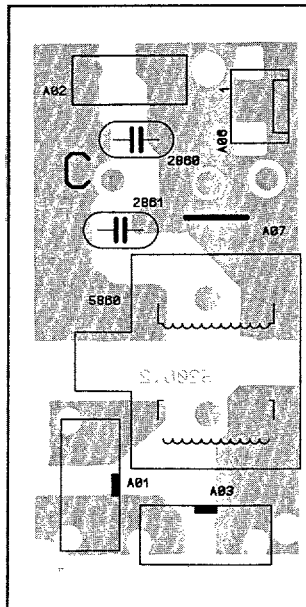


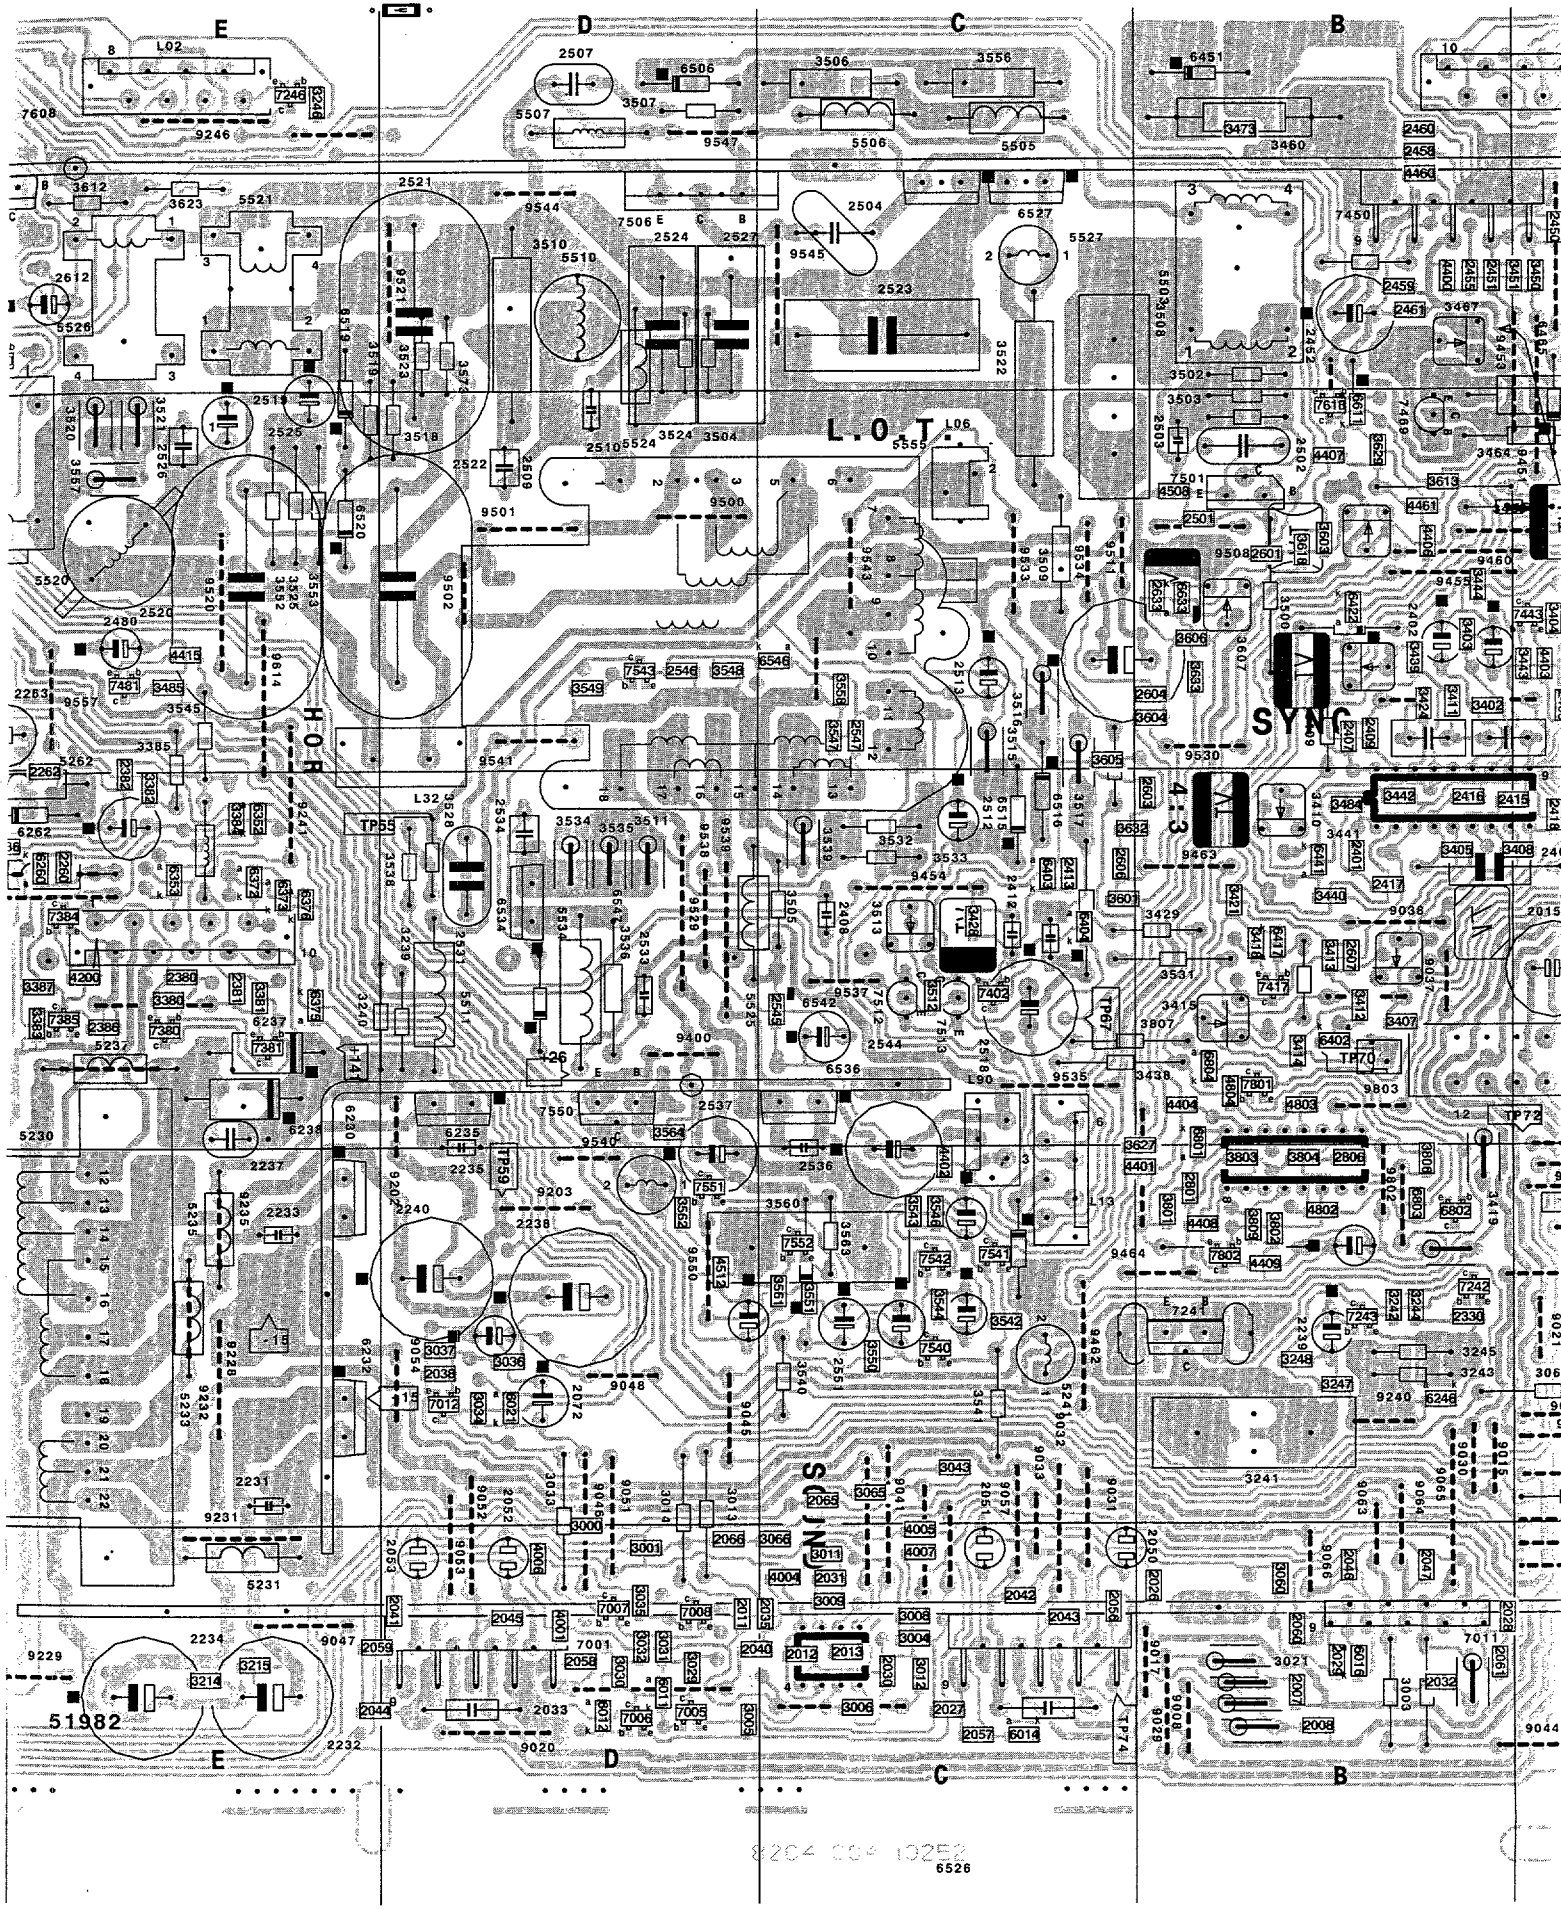

8204 009 10252  
6526

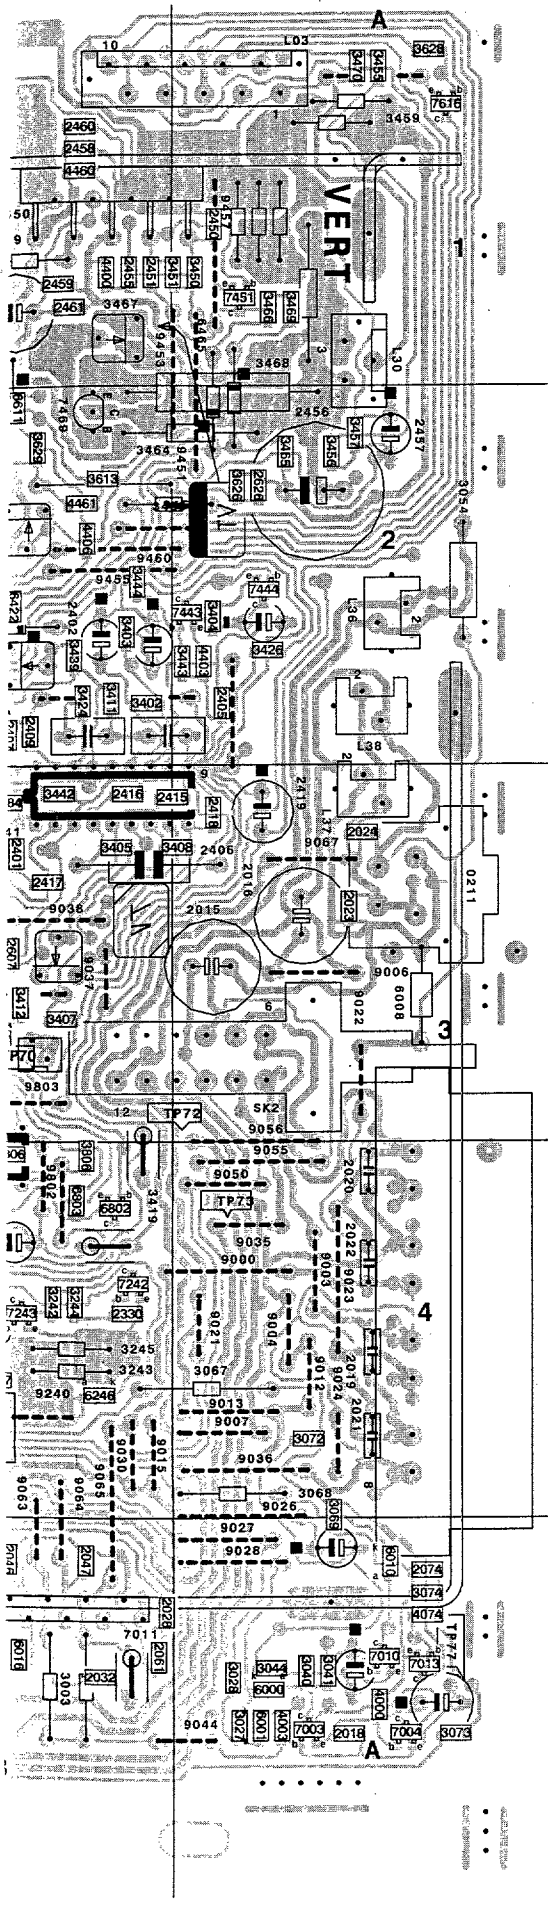


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 C4	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4802 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4803 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4804 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 E3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F3
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9226 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7268 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7273 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7309 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5381 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5503 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9240 B4
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9241 E3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9242 G2
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7443 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7469 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 F2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9453 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5543 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2050 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3553 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E3	9028 F5	9543 C2
2215 G4	2632 B3	3407 B3	3607 B2	6353 E3	9020 D5	9544 D1
2216 G5	2633 B2	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F5	3000 D4	3410 B3	3610 F1	6375 E3	9024 A4	9549 E1
2219 F5	3001 B5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2231 E4	3002 B5	3412 B2	3613 B2	6402 B3	9026 A4	9557 E2
2232 E5	3003 B5	3413 B3	3615 F1	6403 C3	9027 A5	9614 E2
2233 E4	3004 C6	3414 B3	3616 F1	6404 C3	9028 A5	9615 B2
2234 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9602 B4
2235 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9603 B3
2236 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	
2237 E3	3009 C5	3418 B3	3620 F1	6451 B1	9033 C5	L01 F1
2238 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L02 E1
2239 B4	3012 C6	3421 B3	3623 E1	6480 F1	9035 A4	L03 A1
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A4	L06 C2
2251 F2	3014 D4	3424 B2	3626 A2	6515 C3	9037 B3	L13 C4
2255 F3	3016 B5	3426 A2	3627 B4	6516 C3	9038 B3	L27 B3
2258 F3	3019 B5	3428 C3	3630 F1	6517 C3	9039 B3	L30 A1
2260 E3	3020 B5	3429 B3	3632 C3	6519 E2	9041 C4	L32 D3
2261 E3	3021 B5	3430 B3	3633 C3	6520 E2	9042 C4	L33 G2
2262 E3	3022 B5	3437 B1	3634 B3	6527 C1	9043 D5	L34 G2
2263 E2	3023 C5	3438 B3	3634 B3	6529 F1	9044 A5	L35 G3
2270 G1	3024 C5	3439 B2	3636 B4	6534 D3	9045 D4	L36 A2
2272 G2	3026 D5	3440 B3	3637 B3	6536 C3	9046 D4	L37 A3
2330 B4	3027 A5	3442 B3	3639 B4	6537 C3	9047 E5	L38 A2
2380 E3	3028 A5	3443 A2	4000 A5	6542 C3	9048 D4	L39 F3
2381 E3	3029 D5	3444 B2	4001 D5	6546 C2	9050 A4	L40 E3
2382 E3	3030 D5	3450 A1	4003 A5	6547 D3	9051 D4	L41 G1
2386 E3	3031 D5	3451 A1	4004 C5	6551 D4	9052 D4	L61 G2
2401 B3	3032 D5	3455 A1	4005 C5	6601 E1	9053 D5	L65 G2
2402 B2	3033 D4	3456 A2	4006 D5	6611 B2	9054 D4	L66 D1
2403 A2	3034 D4	3457 A2	4007 C5	6801 B4	9055 A4	L70 A2
2404 A2	3035 C5	3458 A1	4074 A5	6802 B4	9056 A4	L80 G4
2405 A2	3036 D4	3459 A1	4200 E3	6803 B4	9057 C4	L90 C3
2406 B3	3037 D4	3460 B1	4402 C4	6804 B4	9058 G2	L95 G2
2407 B2	3040 A5	3461 A1	4403 A2	7000 C5	9059 B1	SK1 G3
2408 C3	3041 A5	3462 A1	4406 B2	7001 D5	9060 G1	SK2 A3
2409 B2	3043 C4	3463 A1	4407 B1	7002 C5	9063 B5	
2410 B2	3044 A5	3464 A2	4408 B4	7003 A5	9064 B5	
2411 B2	3049 G1	3465 A2	4409 B4	7004 A5	9065 B4	
2412 C3	3050 G1	3466 A1	4415 E2	7005 D5	9066 B5	
2413 C3	3051 G1	3467 B2	4460 B1	7006 D5	9067 A3	
2415 A3	3052 G1	3468 A2	4461 B2	7007 D5	9203 D4	
2416 B3	3053 G1	3469 A1	4508 B2	7008 D5	9205 H1	

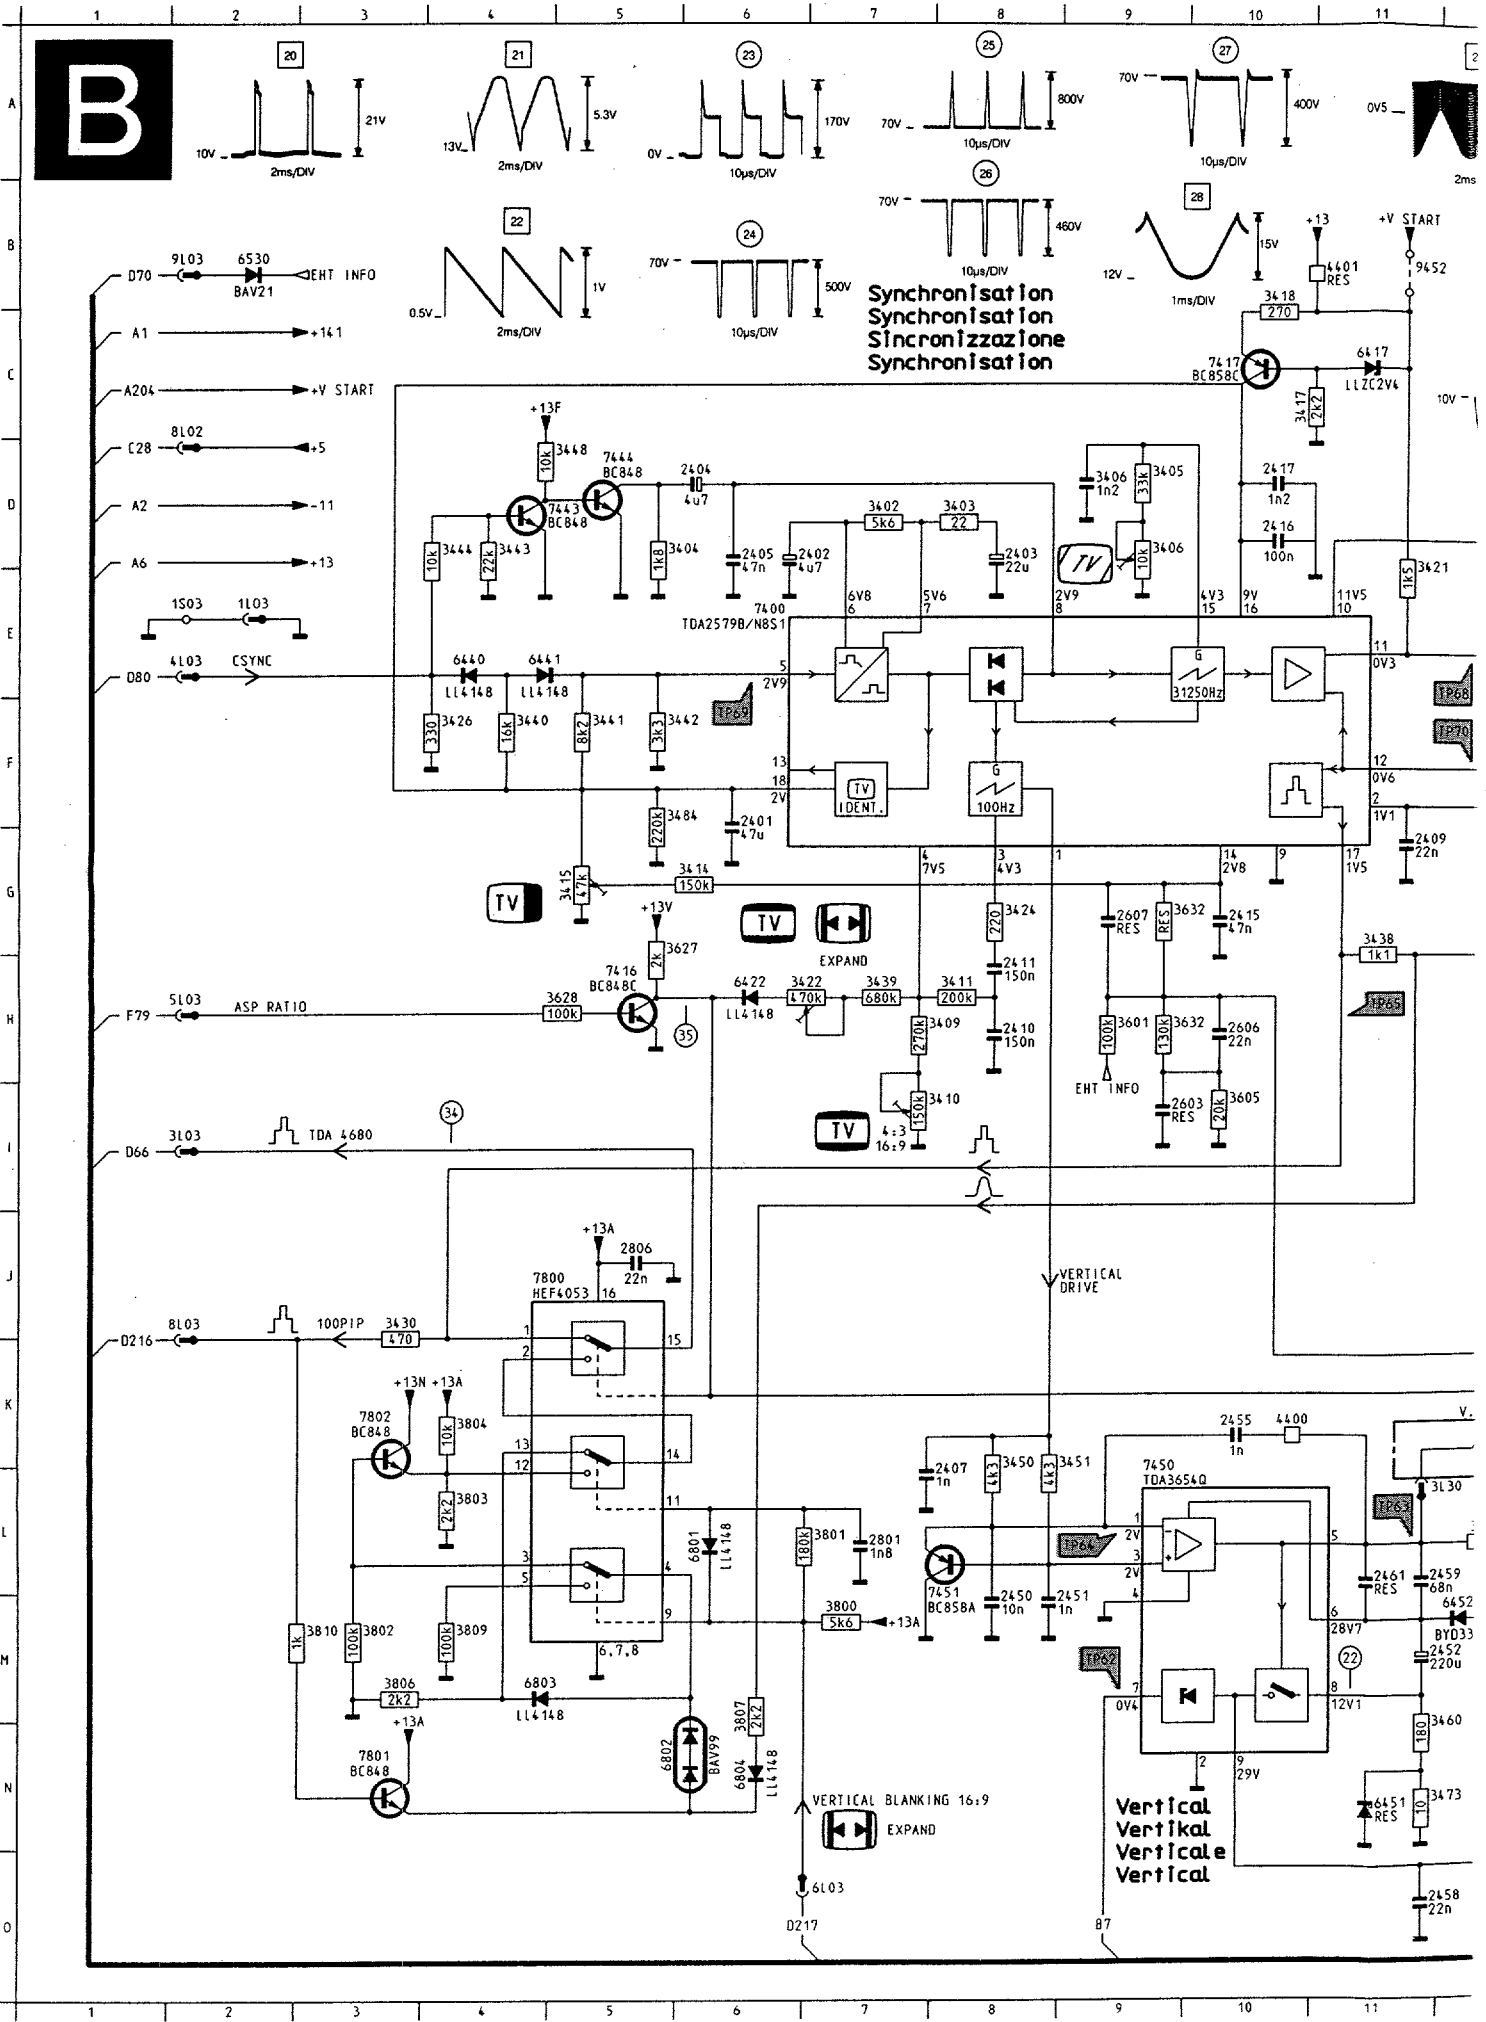


# Synchronisation

11 12 13 14 15 16 17 18 19 20 21 22

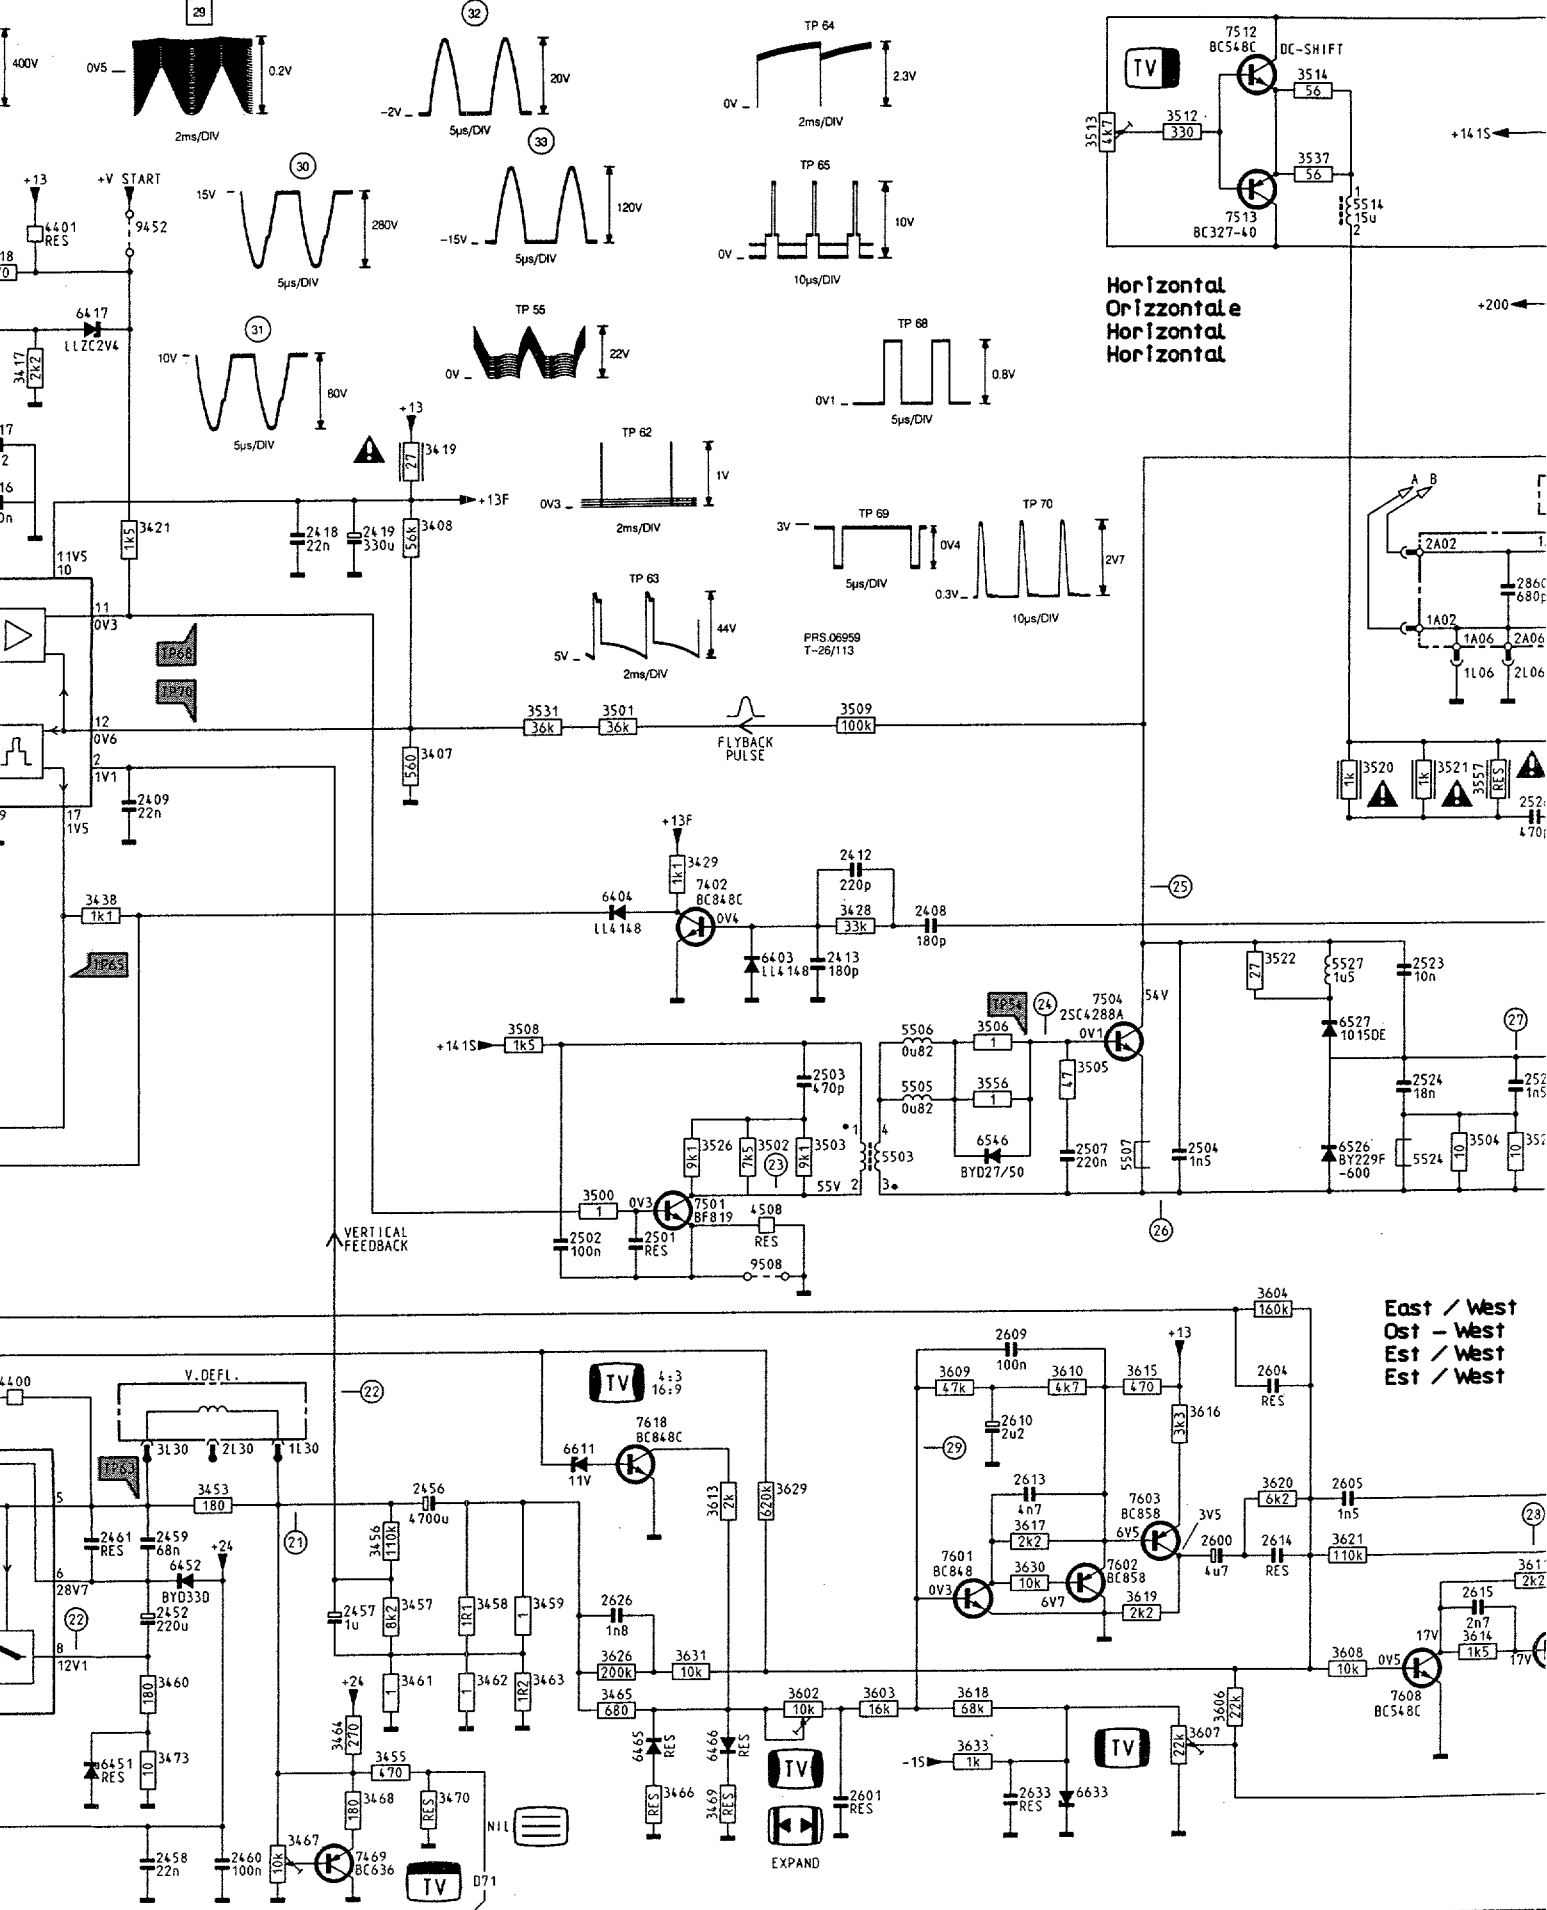


Horizontal  
Orizzontale  
Horizontal  
Horizontal

East / West  
Ost - West  
Est / West  
Est / West

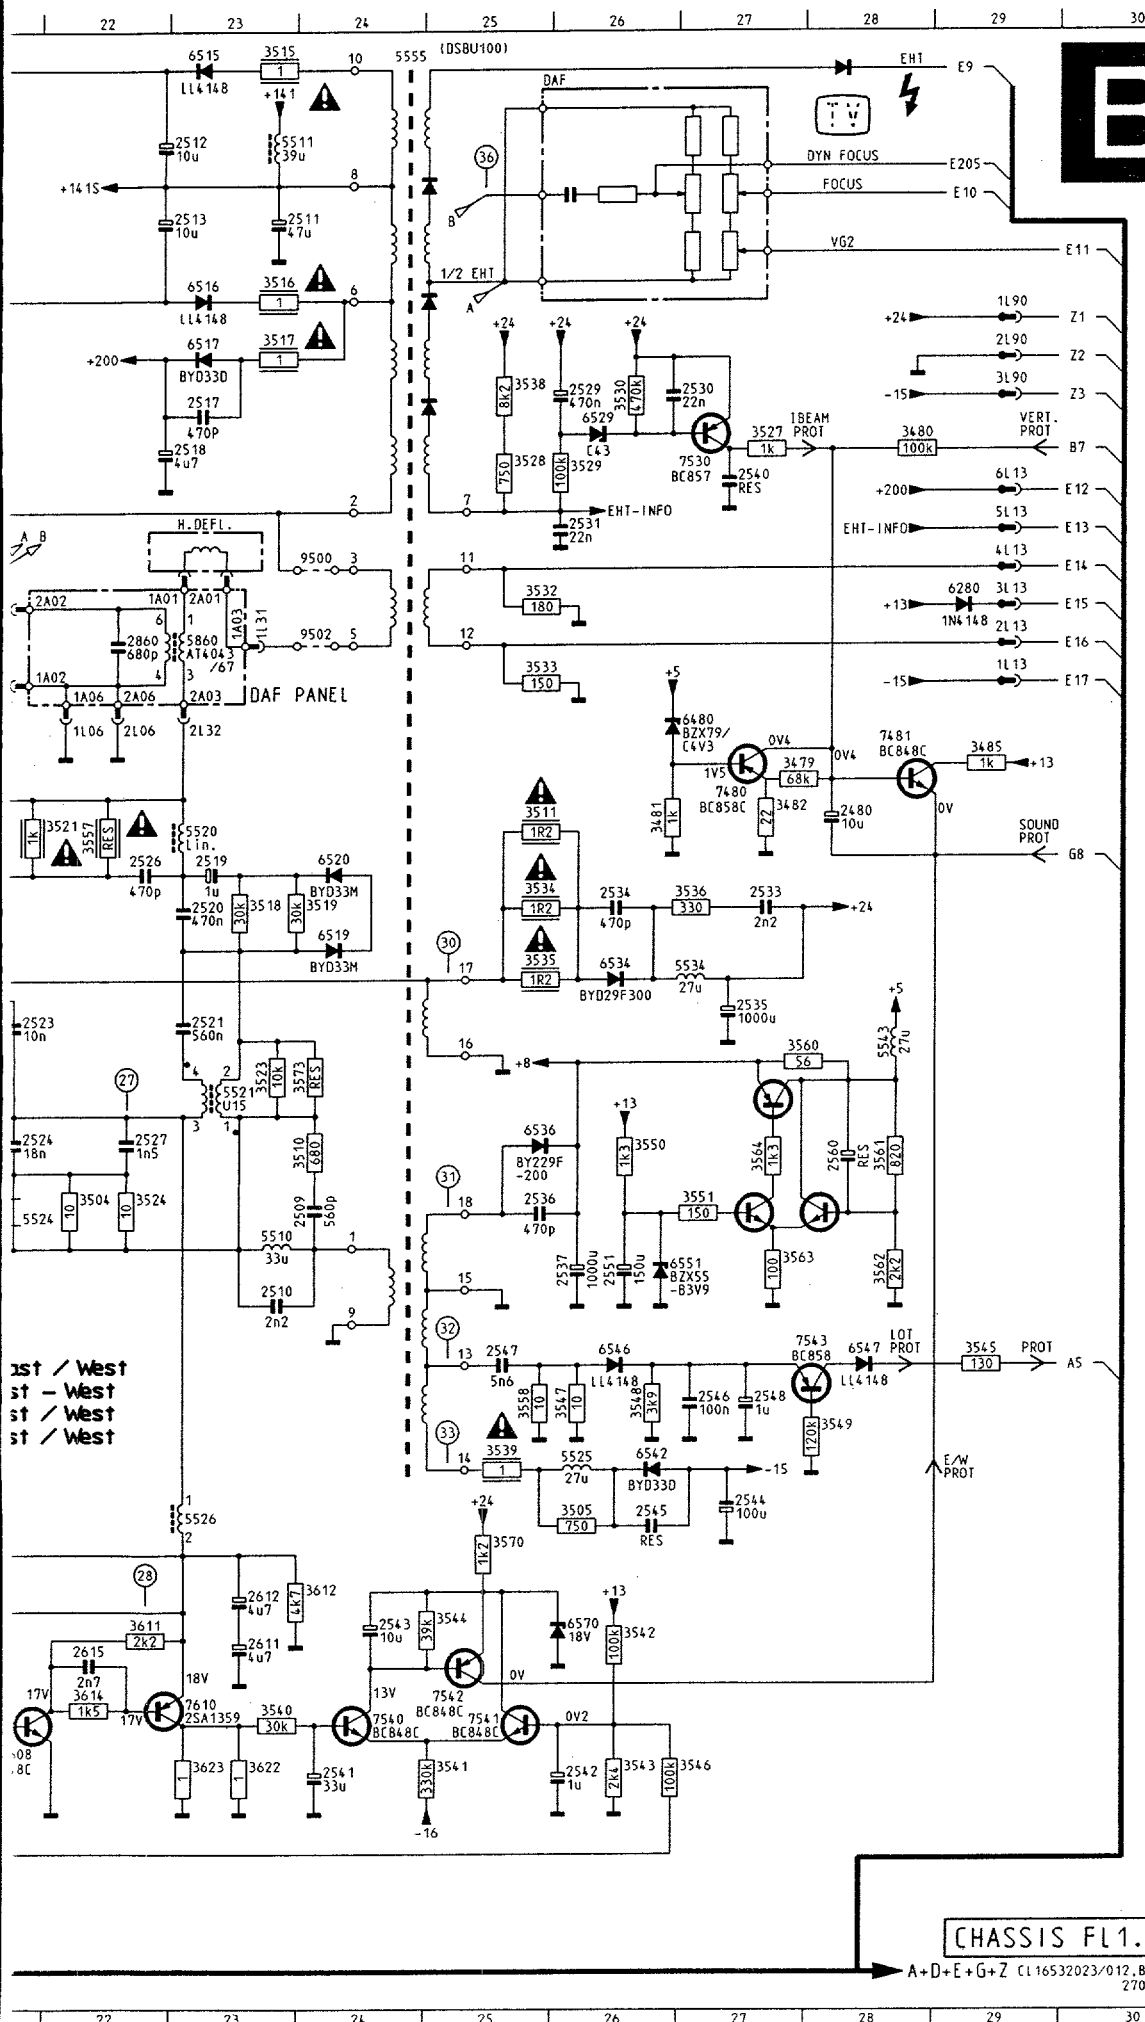

2401	G 6	3450	K 8	3632	H 9
2402	D 6	3451	K 9	3632	G 9
2403	D 6	3453	L12	3633	N18
2404	D 6	3455	M13	3800	M 7
2405	D 6	3456	L13	3801	L 7
2407	L 8	3457	M13	3802	M 4
2408	H18	3458	M14	3803	L 3
2409	G11	3459	M14	3804	K 4
2410	H 8	3460	M11	3806	M 3
2411	H 8	3461	M13	3807	M 4
2412	G17	3462	M14	3809	M 6
2413	H17	3463	M14	3810	M 3
2415	G10	3464	M13	4400	K10
2416	D10	3465	N15	4401	B11
2417	D10	3466	N15	4508	J16
2418	E13	3467	O12	5503	I17
2419	E13	3468	N13	5505	I17
2450	M 8	3469	O16	5506	I17
2451	M 8	3470	N14	5507	I19
2452	M11	3473	N11	5510	J23
2455	K10	3479	F27	5511	A23
2456	L14	3480	C28	5514	B21
2457	M13	3481	F26	5520	G23
2458	O11	3482	F27	5521	I23
2459	L11	3484	F 5	5524	K21
2460	O12	3485	F29	5525	K26
2461	L11	3500	J15	5526	I23
2480	F28	3501	F15	5527	H21
2501	J15	3502	I16	5534	H27
2502	J15	3503	I17	5543	H28
2503	I17	3504	I22	5555	A24
2504	I20	3505	I19	5860	E23
2507	I19	3505	L26	6280	E29
2509	I24	3506	H18	6403	H16
2510	J23	3508	H14	6404	G15
2511	B23	3509	F17	6417	C11
2512	A23	3510	I24	6422	H 6
2513	B23	3511	F25	6440	E 4
2517	C23	3512	A20	6441	E 4
2518	O23	3513	B19	6451	N11
2519	G23	3514	A21	6452	M12
2520	G23	3515	A23	6465	N16
2521	H23	3516	B23	6466	M16
2523	H21	3517	C23	6480	F27
2524	I21	3518	G23	6515	A23
2526	G22	3519	G24	6516	B23
2527	I22	3520	F21	6517	C23
2529	C26	3521	F22	6519	G24
2530	C27	3522	H20	6520	G24
2531	O26	3523	H23	6526	I21
2533	G27	3524	I22	6527	H21
2534	G26	3526	I16	6529	C26
2535	H27	3527	C27	6530	B 2
2536	I25	3528	O25	6534	H26
2537	J26	3529	O26	6536	I25
2540	O27	3530	C26	6542	K26
2541	N24	3531	F14	6546	I18
2542	N26	3532	E25	6546	K26
2543	H24	3533	E25	6547	K28
2544	I27	3534	G25	6551	J26
2545	L26	3535	H25	6570	M26
2546	K27	3536	G27	6611	L15
2547	K25	3537	B21	6633	N19
2548	K27	3538	C25	6801	L 6
2551	J26	3539	K25	6802	N 5
2560	I28	3540	M23	6803	M 4
2600	M20	3541	N25	6804	N 6
2601	N17	3542	M26	7400	E 6
2603	I 9	3543	N26	7402	G16
2604	K20	3544	M25	7416	H 5
2605	L21	3545	K29	7417	C10
2606	H10	3546	N27	7443	D 4
2607	G 9	3547	K26	7444	D 5
2609	K18	3548	K26	7450	L 9
2610	L18	3549	K28	7451	L 8
2611	M23	3550	I26	7469	O13
2612	M23	3551	I27	7480	F27
2613	L18	3556	I18	7481	F28
2614	M20	3557	G22	7501	J16
2615	M22	3558	K25	7504	H19
2626	M15	3560	H27	7512	A20
2633	N18	3561	I28	7513	B20
2801	L 7	3562	J28	7530	O27
2806	J 5	3563	J27	7540	M24
2860	E22	3564	I27	7541	M25
3402	D 7	3570	L25	7542	M25
3403	D 8	3573	H24	7543	K28
3404	D 5	3601	H 9	7601	M18
3405	D 9	3602	N17	7602	M19
3406	D 9	3603	N17	7603	L19
3406	D 9	3604	K20	7608	N21
3407	F14	3605	I10	7610	M23
3408	D14	3606	N20	7618	L15
3409	H 7	3607	N20	7800	J 4
3410	I 7	3608	M21	7801	N 3
3411	H 8	3609	K18	7802	K 3
3414	G 6	3610	K19	9452	B11
3415	G 5	3611	M22	9500	D24
3417	C10	3612	L24	9502	E24
3418	B10	3613	L16	9508	J16
3419	D14	3614	M22		
3421	D11	3615	K19		
3422	H 7	3616	K20		
3424	G 8	3617	L18		
3426	F 4	3618	N18		
3428	H17	3619	M19		
3429	G16	3620	L20		
3430	J 3	3621	M21		
3438	G11	3622	N23		
3439	H 7	3623	N23		
3440	F 4	3626	M15		
3441	F 5	3627	G 5		
3442	F 5	3628	H 5		
3443	D 4	3629	L16		
3444	D 4	3630	M18		
3448	D 5	3631	M16		

CHASSIS FL1.2  
A+D+E+G+Z C116532023/012.BRF  
270691

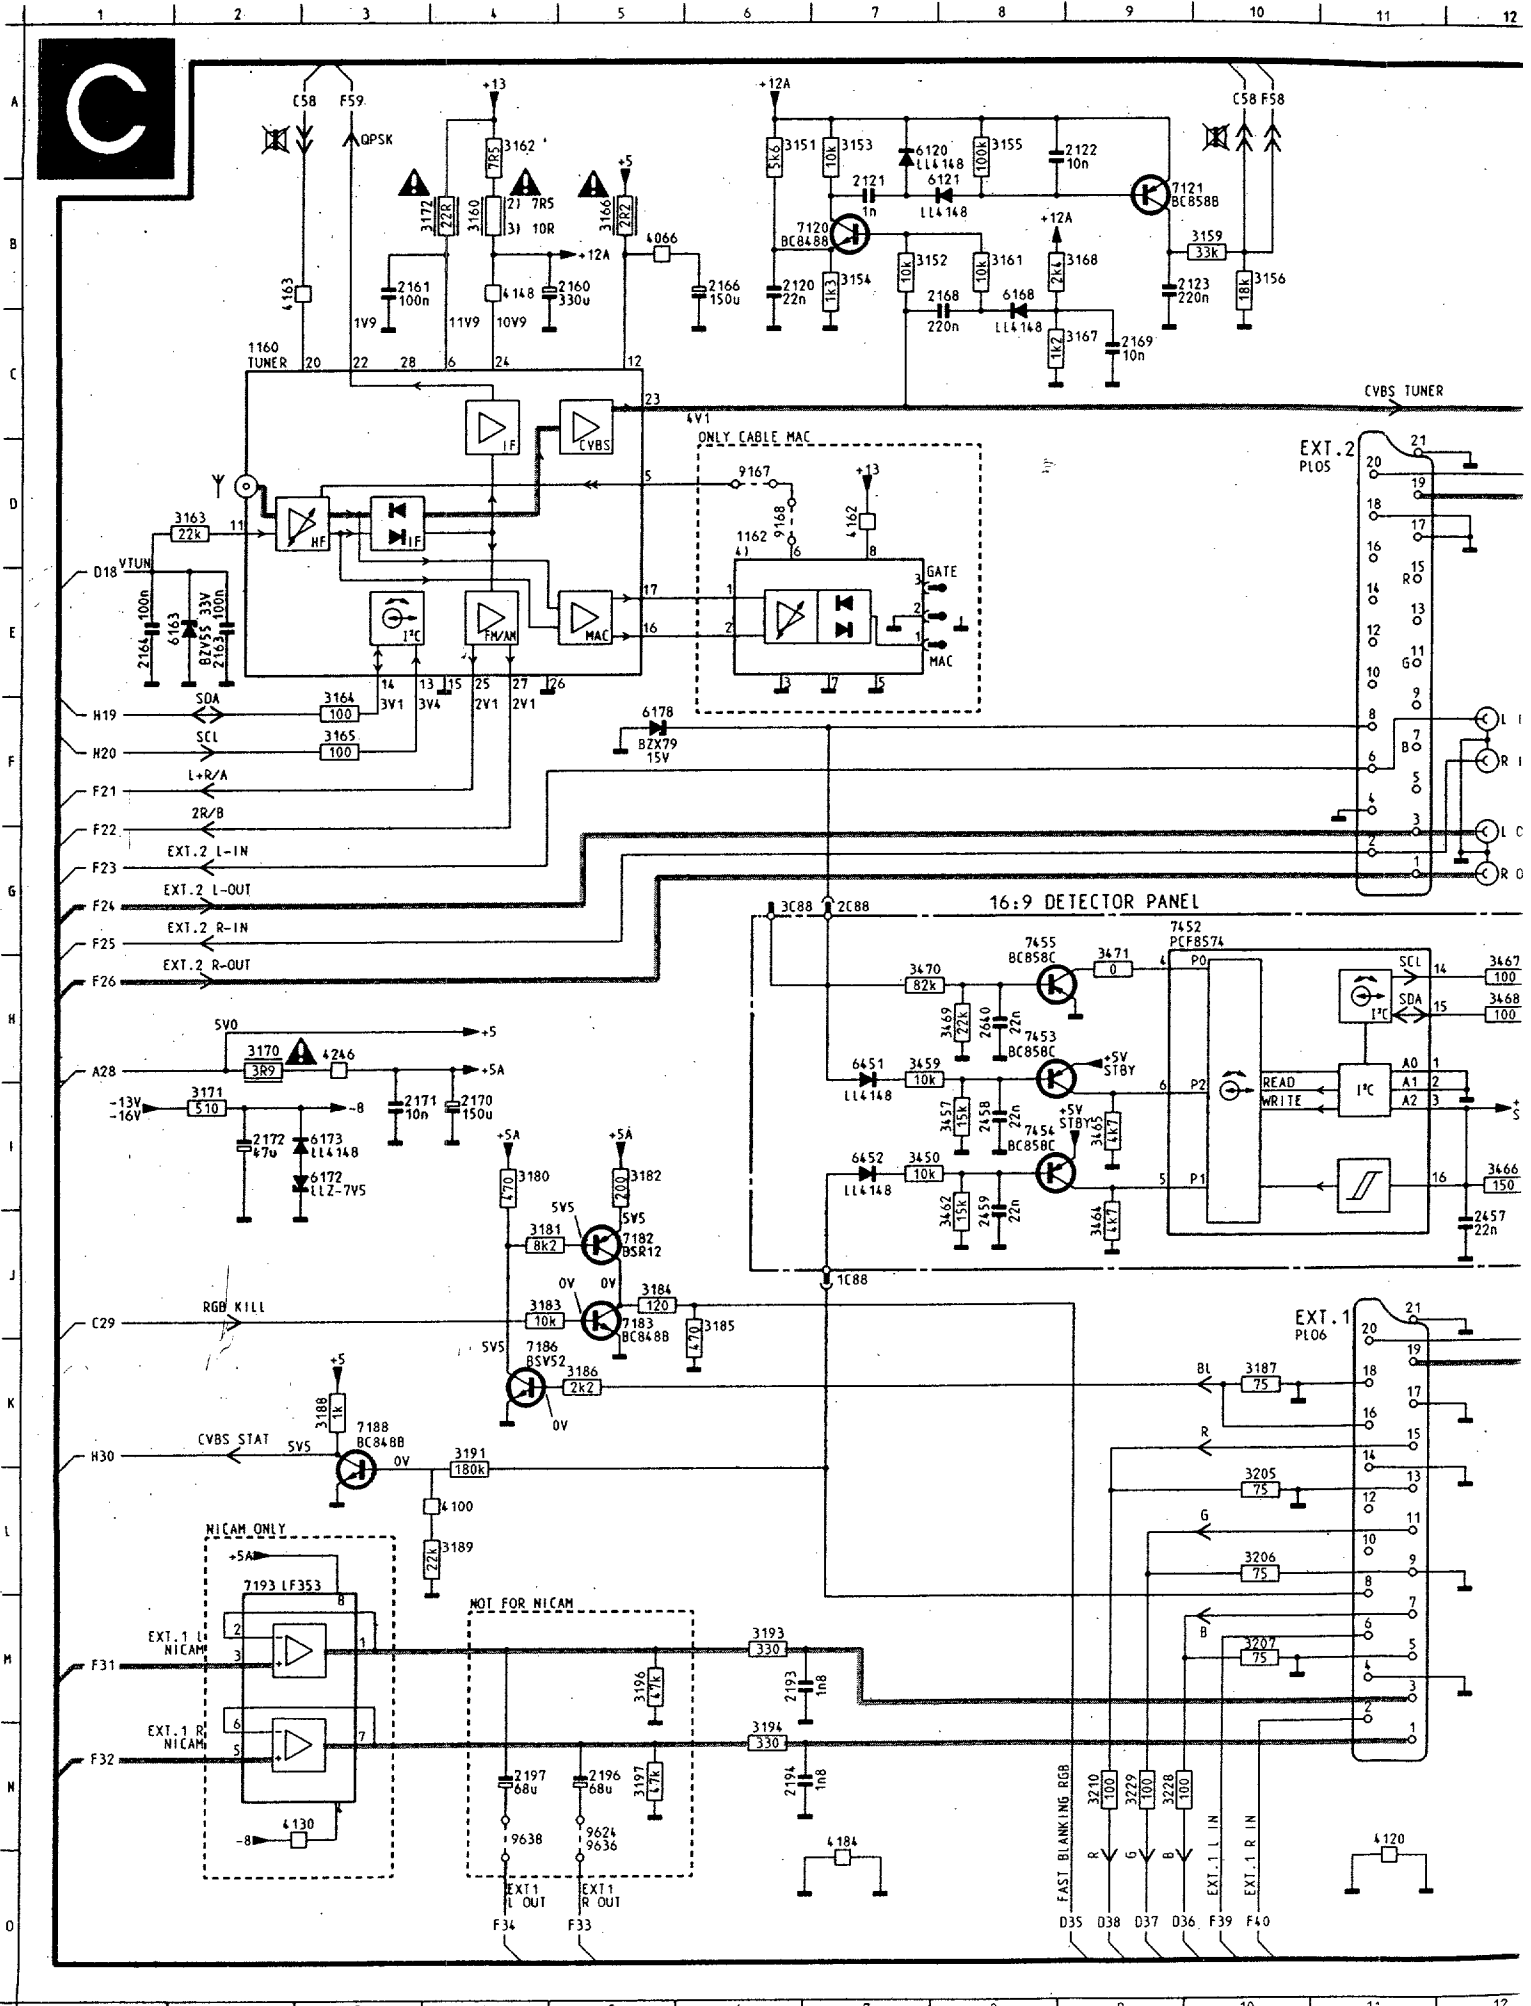




11 12 13 14 15 16 17 18 19 20 21 22

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT - IN SETS:  
 PRESENT SUR LES APPAREILS:  
 ANWESEND IN GERÄTEN:  
 PRESENTE SUI MODELLI:  
 PRESENTE SOBRE MODELOS:





- 1) PAL/SEC NTSC 3.58
- 2) PAL/SEC AND PAL/SEC NTSC 3.58
- 3) PAL
- 4) 7219=TEA6415

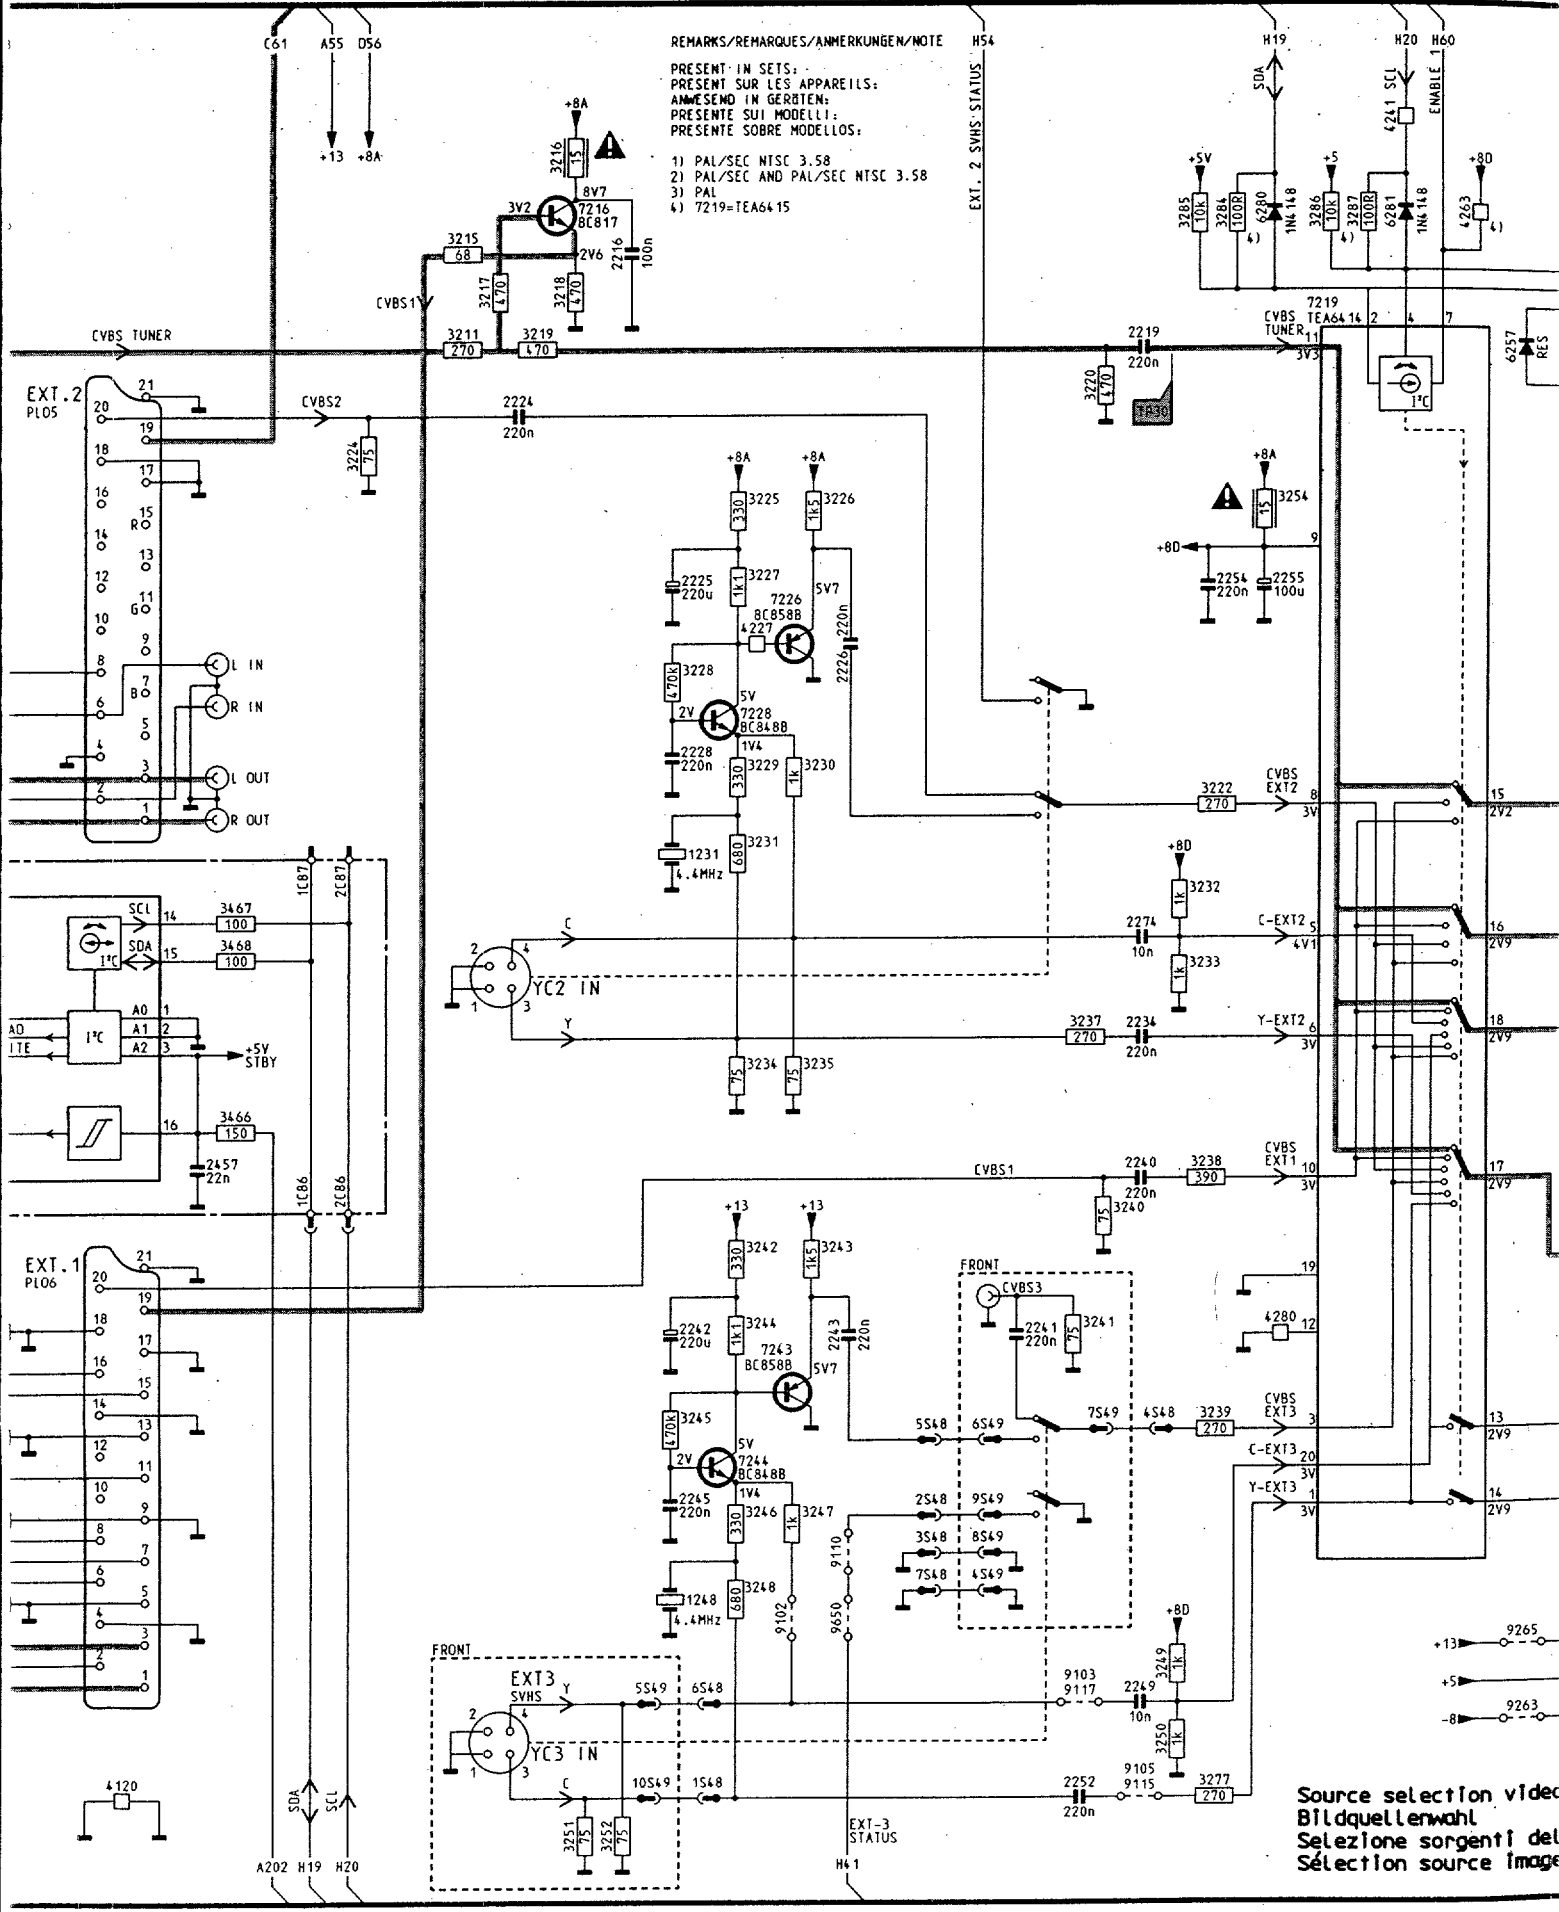

Source selection vidoc  
 Bildquellenwahl  
 Selezione sorgenti del  
 Sélection source image

1: 12 13 14 15 16 17 18 19 20 21 22

22 23 24 25 26 27 28 29 30

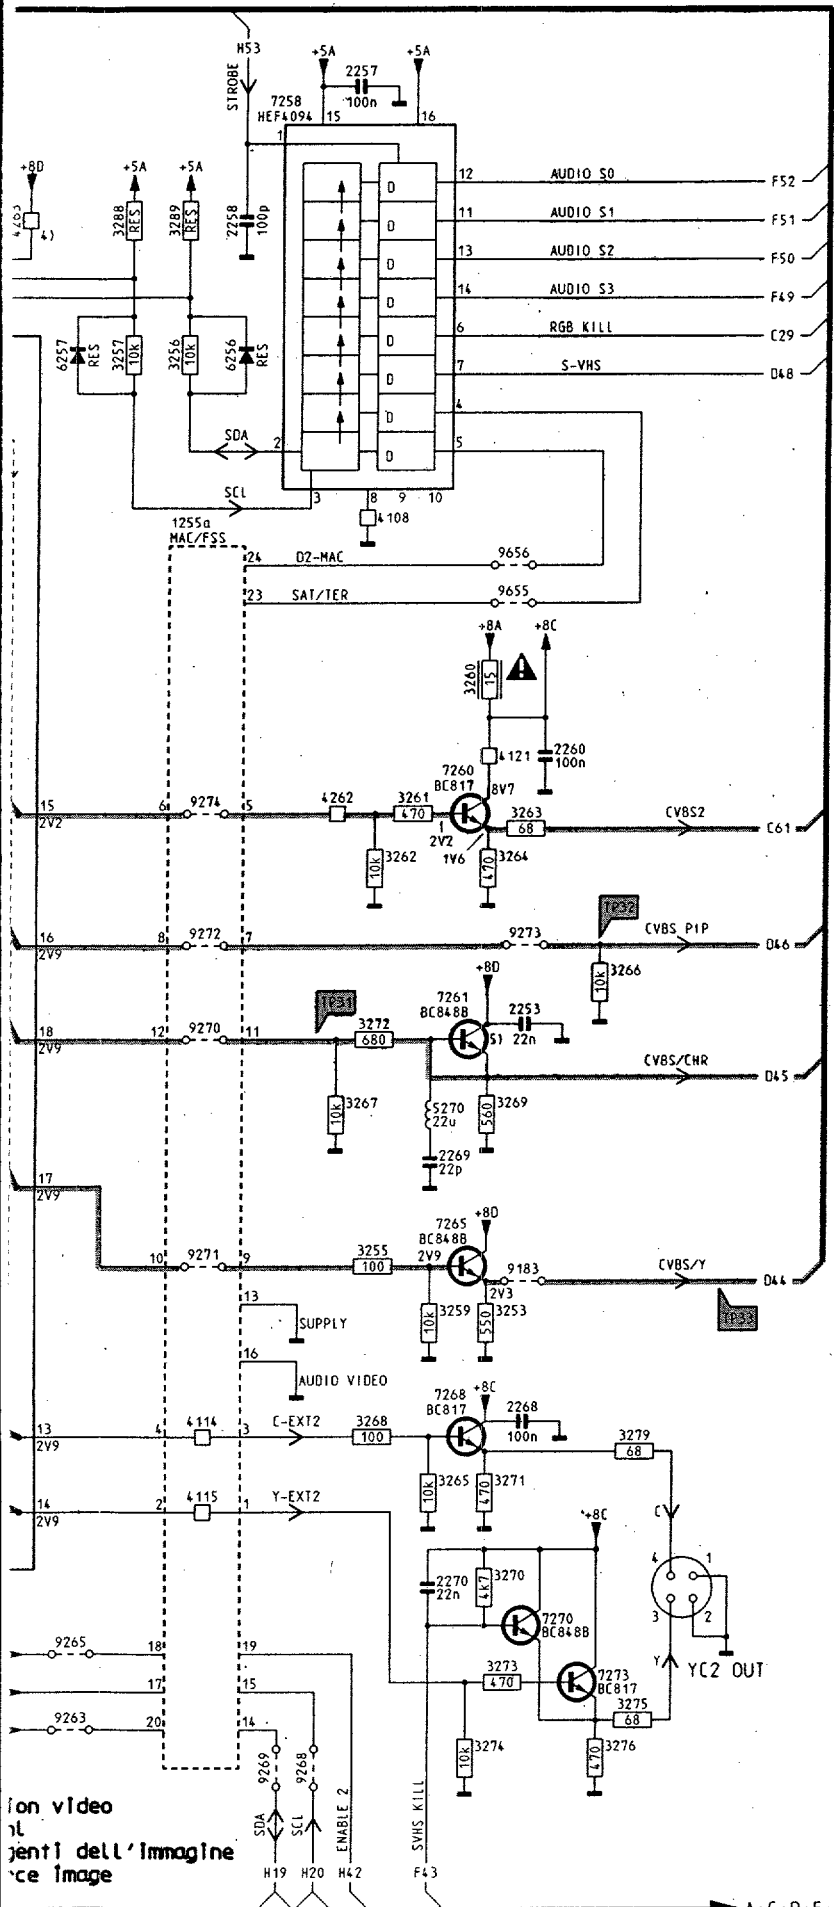


1160	C 2	3242	J16	9167	D 6
1162	D 6	3243	J17	9168	D 6
1231	G16	3244	K16	9183	J26
1248	H16	3245	L16	9263	M22
1255	E23	3246	L16	9265	M22
2120	B 6	3247	L16	9268	M24
2121	B 7	3248	M16	9269	M24
2122	A 8	3249	M19	9270	I23
2123	B 9	3250	M19	9271	J23
2160	B 5	3251	O15	9272	H23
2161	B 3	3252	O15	9273	H26
2163	E 2	3253	K25	9274	G23
2164	E 1	3254	O20	9624	N 5
2166	B 6	3255	J25	9636	N 5
2168	B 8	3256	C23	9638	N 4
2169	C 9	3257	C23	9650	H17
2170	I 4	3259	K25	9655	E26
2171	I 3	3260	F25	9656	E26
2172	I 2	3261	G25		
2193	M 6	3262	G25		
2194	M 6	3263	G26		
2196	N 5	3264	G25		
2197	N 4	3265	L25		
2216	C15	3266	H26		
2219	C19	3267	I24		
2224	D14	3268	L25		
2225	E15	3269	I25		
2226	F17	3270	M25		
2228	F15	3271	L25		
2234	I19	3272	I25		
2240	J19	3273	M26		
2241	K18	3274	M25		
2242	K15	3275	N27		
2243	K17	3276	N26		
2245	L15	3277	O20		
2249	M19	3279	L27		
2252	O19	3284	B20		
2253	H26	3285	B19		
2254	E20	3286	B21		
2255	E20	3287	B21		
2257	A24	3288	B23		
2258	B23	3289	B23		
2260	F26	3450	I 7		
2268	L26	3457	I 8		
2269	J25	3459	H 7		
2270	M25	3462	J 8		
2274	H19	3464	J 9		
2457	J12	3465	I 9		
2458	I 8	3466	I12		
2459	J 8	3467	H12		
2640	H 8	3468	H12		
3151	A 6	3469	H 8		
3152	B 7	3470	H 7		
3153	A 7	3471	H 9		
3154	B 7	4066	B 5		
3155	A 8	4100	L 4		
3156	B10	4108	E25		
3159	B10	4114	L23		
3160	B 4	4115	L23		
3161	B 8	4120	O11		
3162	A 4	4121	F25		
3163	D 2	4130	N 3		
3164	F 3	4148	B 4		
3165	F 3	4162	D 7		
3166	B 5	4163	B 2		
3167	C 9	4184	O 7		
3168	B 9	4227	E16		
3170	H 2	4241	B21		
3171	I 2	4246	H 3		
3172	B 4	4262	G24		
3180	I 4	4263	B22		
3181	J 4	4280	K20		
3182	I 5	5270	I25		
3183	J 4	6120	A 7		
3184	J 5	6121	B 8		
3185	J 6	6163	E 2		
3186	K 5	6168	B 8		
3187	K10	6172	I 3		
3188	K 3	6173	I 3		
3189	L 4	6178	F 5		
3191	K 4	6256	C23		
3193	M 6	6257	C22		
3194	N 6	6280	B20		
3196	M 5	6281	B21		
3197	N 5	6451	H 7		
3205	L10	6452	I 7		
3206	L10	7120	B 7		
3207	M10	7121	B 9		
3210	N 9	7182	J 5		
3211	C14	7183	J 5		
3215	B14	7186	K 4		
3216	B15	7188	K 3		
3217	C14	7193	L' 2		
3218	C15	7216	B15		
3219	C14	7219	C20		
3220	D19	7226	E16		
3222	G20	7228	F16		
3224	D13	7243	K16		
3225	D16	7244	L16		
3226	D17	7258	A24		
3227	E16	7260	G25		
3228	N 9	7261	H25		
3228	F16	7265	J25		
3229	N 9	7268	K25		
3229	F16	7270	M26		
3230	F16	7273	N26		
3231	G16	7452	G 9		
3232	G19	7453	H 8		
3233	H19	7454	I 8		
3234	I16	7455	G 8		
3235	I16	9102	M16		
3237	I19	9103	M19		
3238	J20	9105	M19		
3239	L20	9110	M17		
3240	J19	9115	O19		
3241	K19	9117	M19		

ion video  
enti dell'immagine  
ce image


CHASSIS FL1.2

CL 16532023/013, CREF  
270691


22 23 24 25 26 27 28 29 30

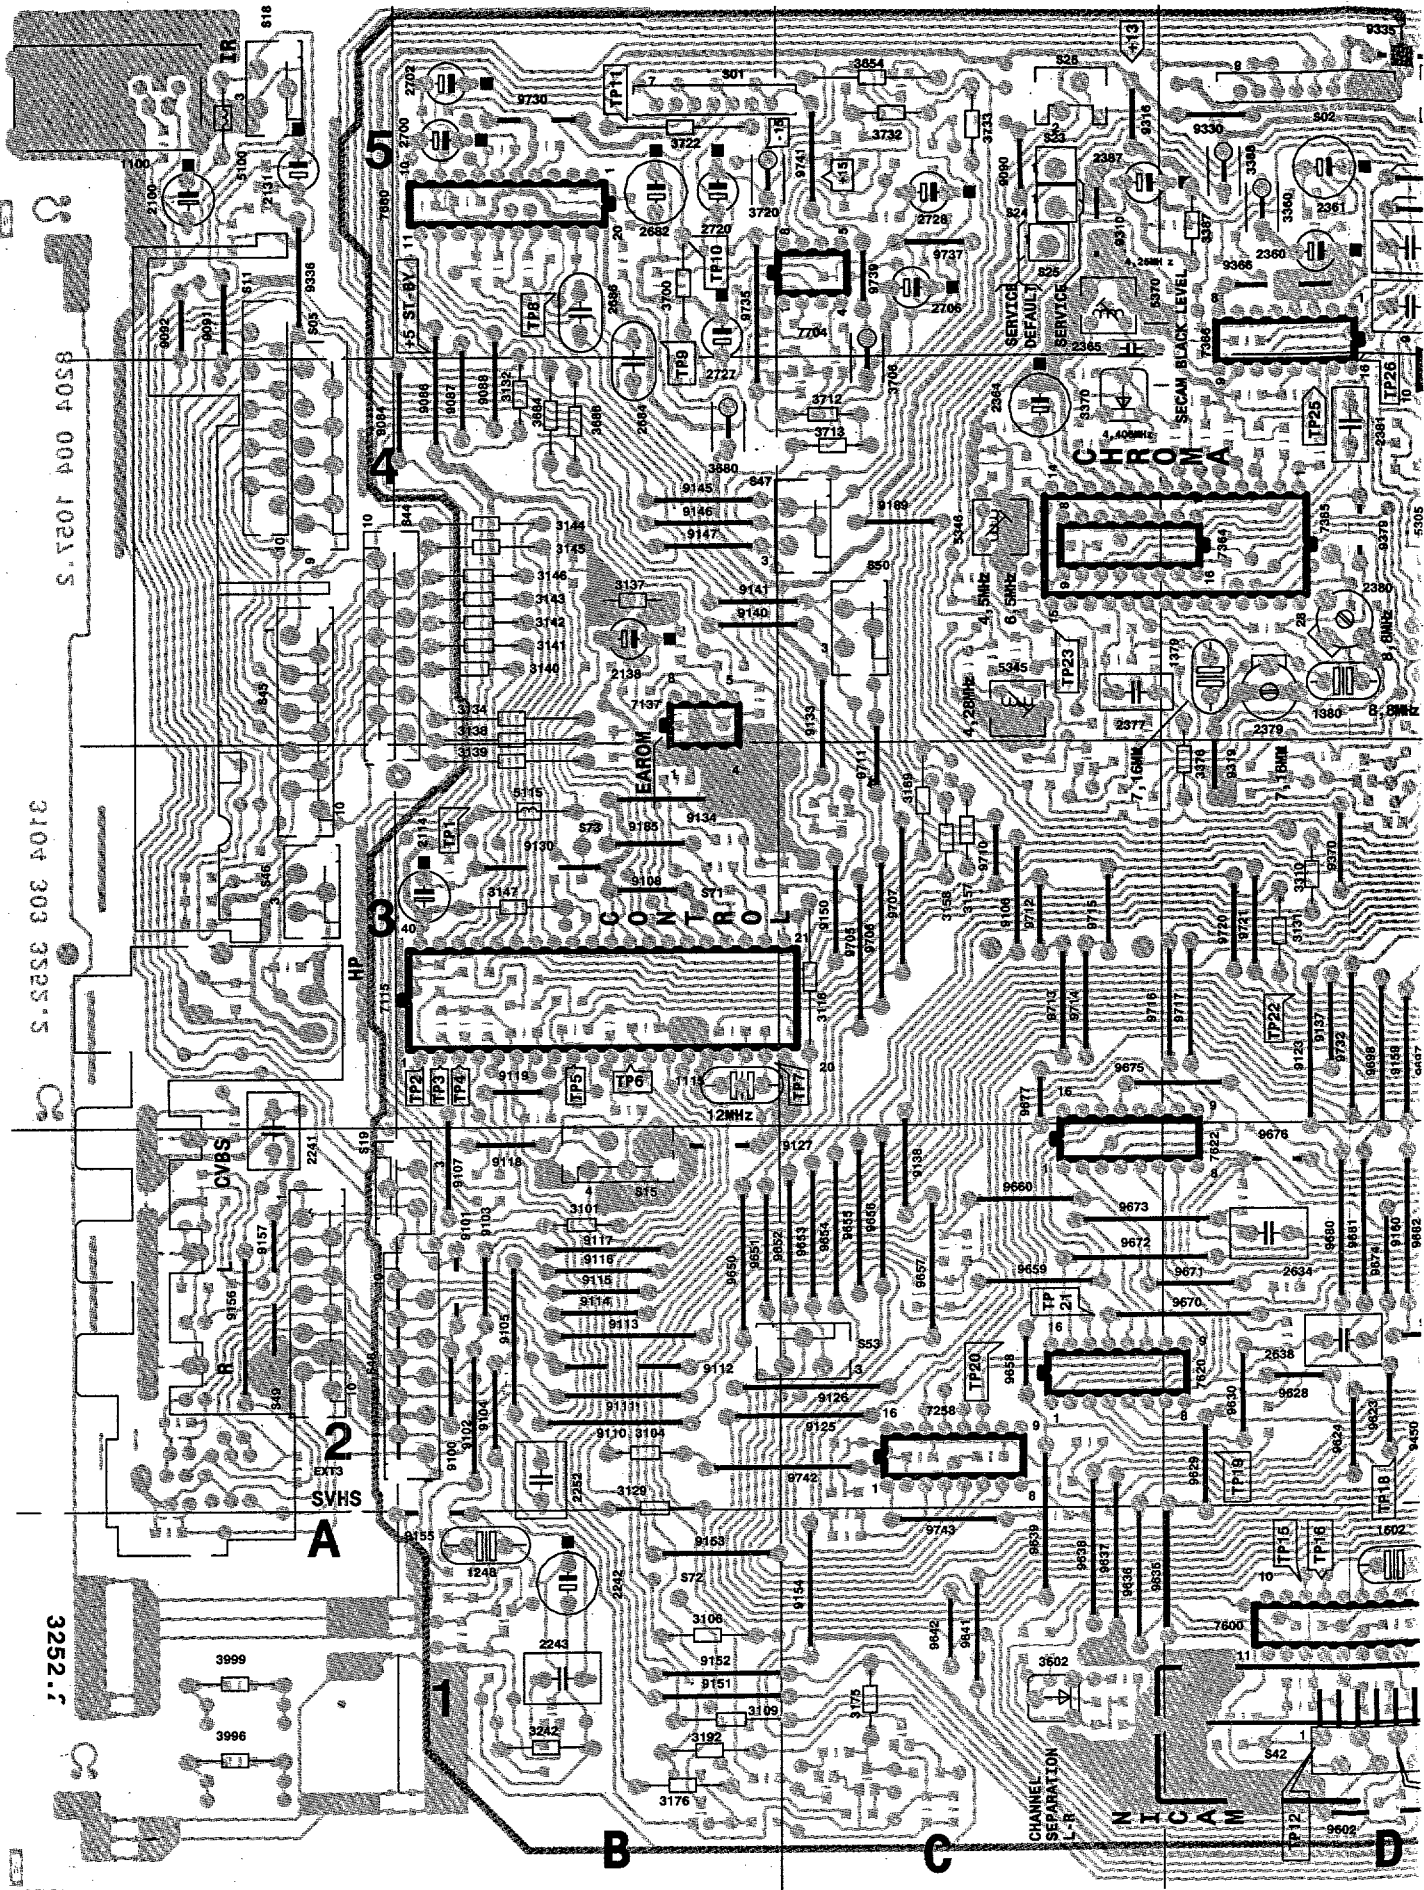


# Platine petits signaux

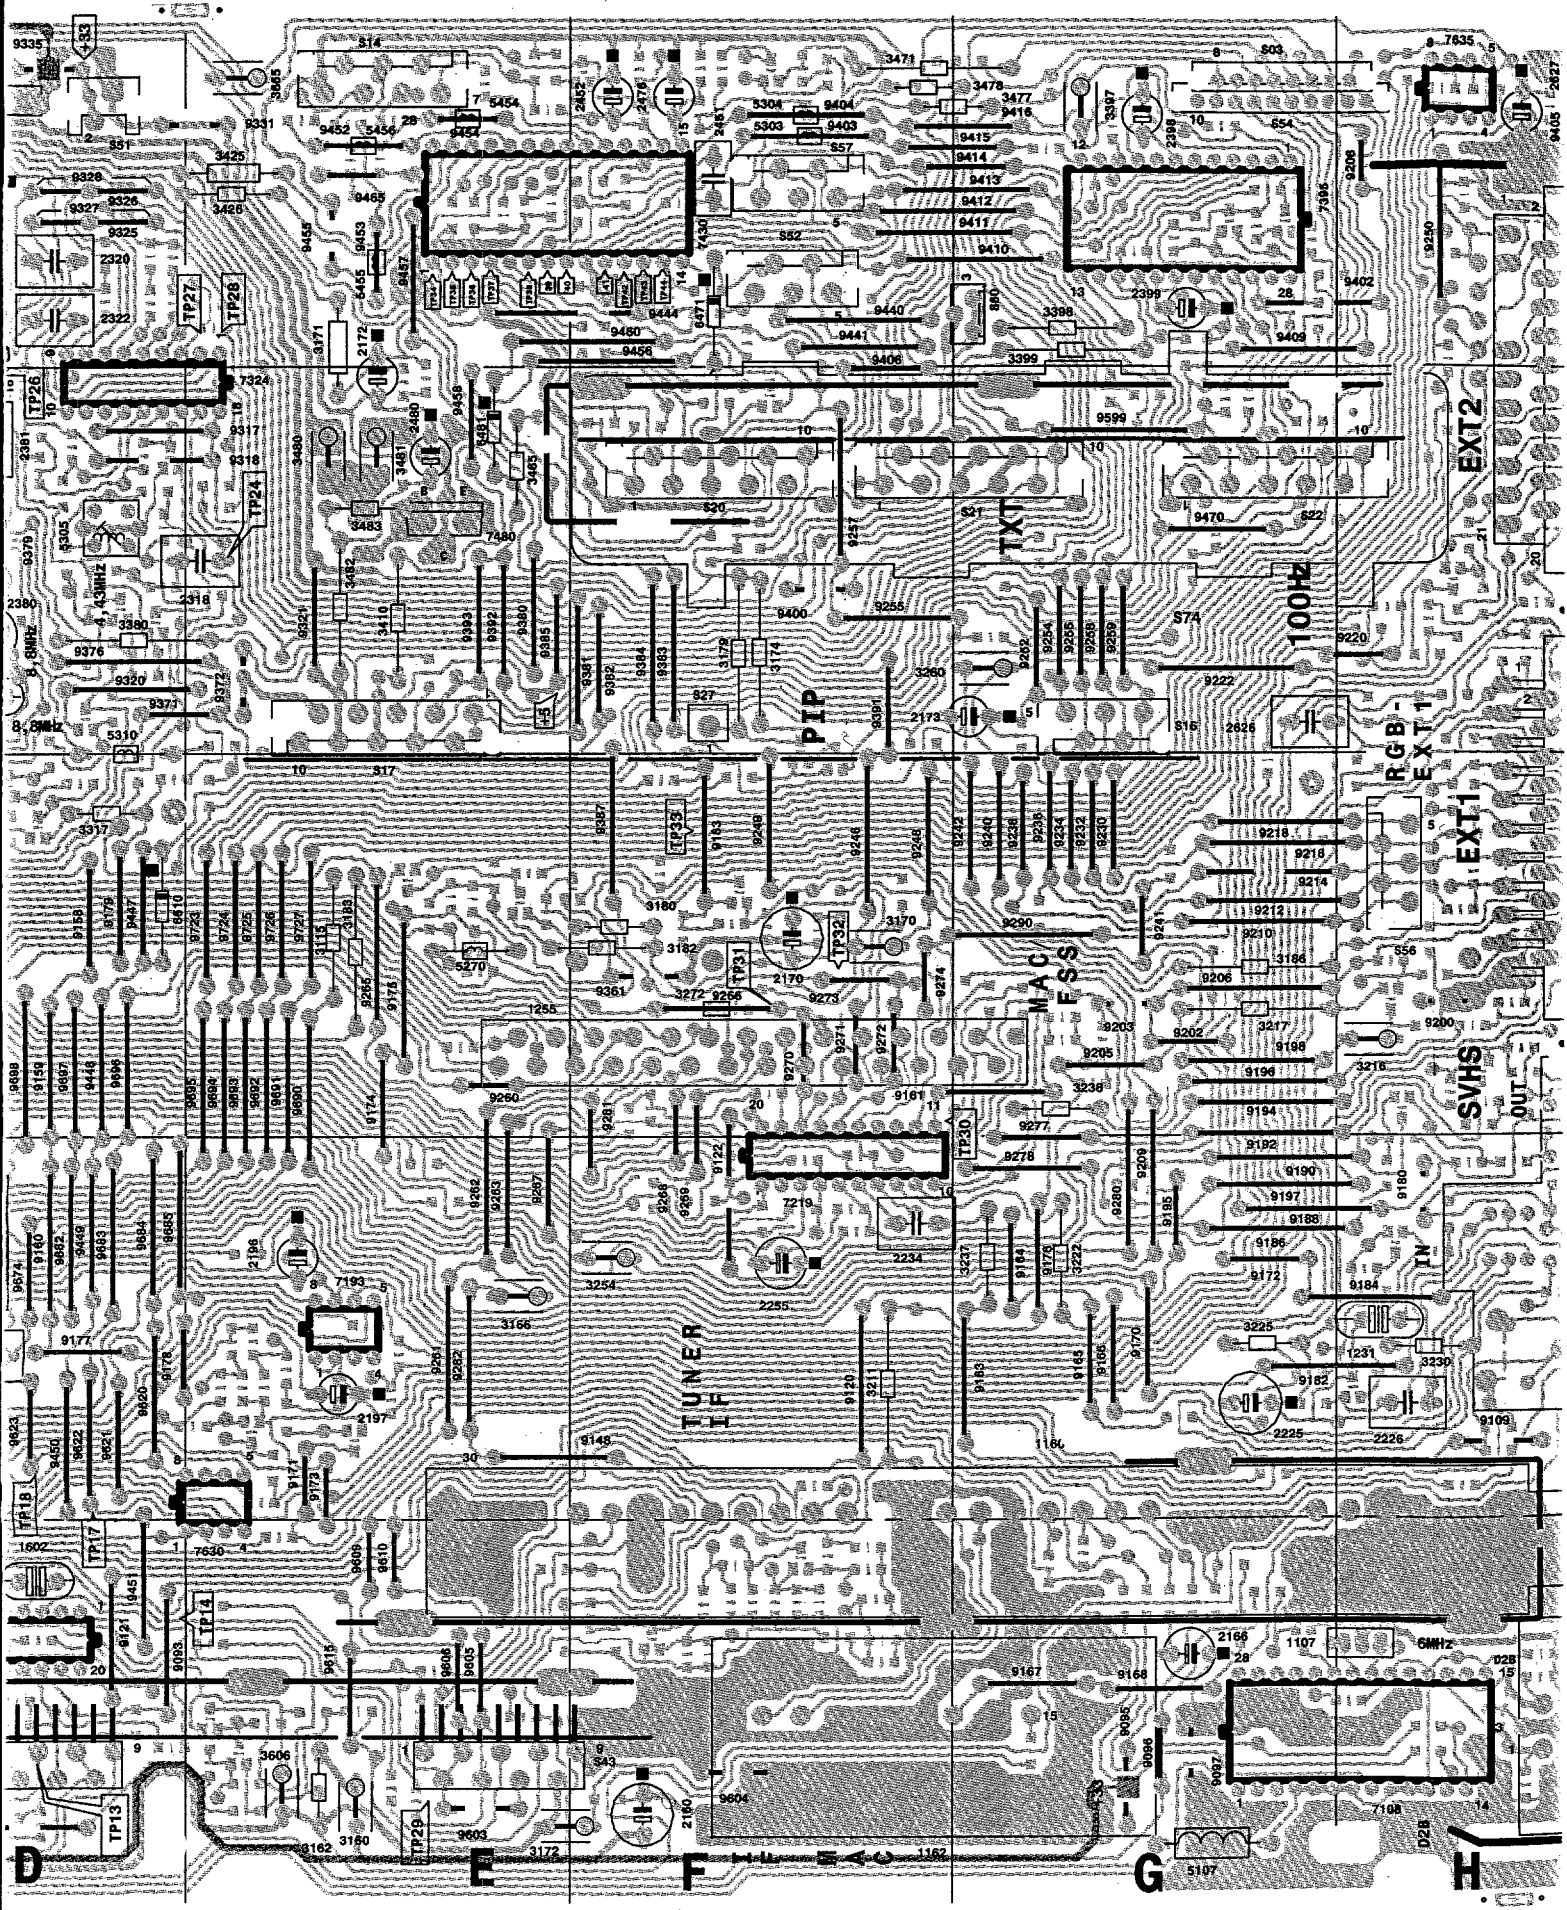



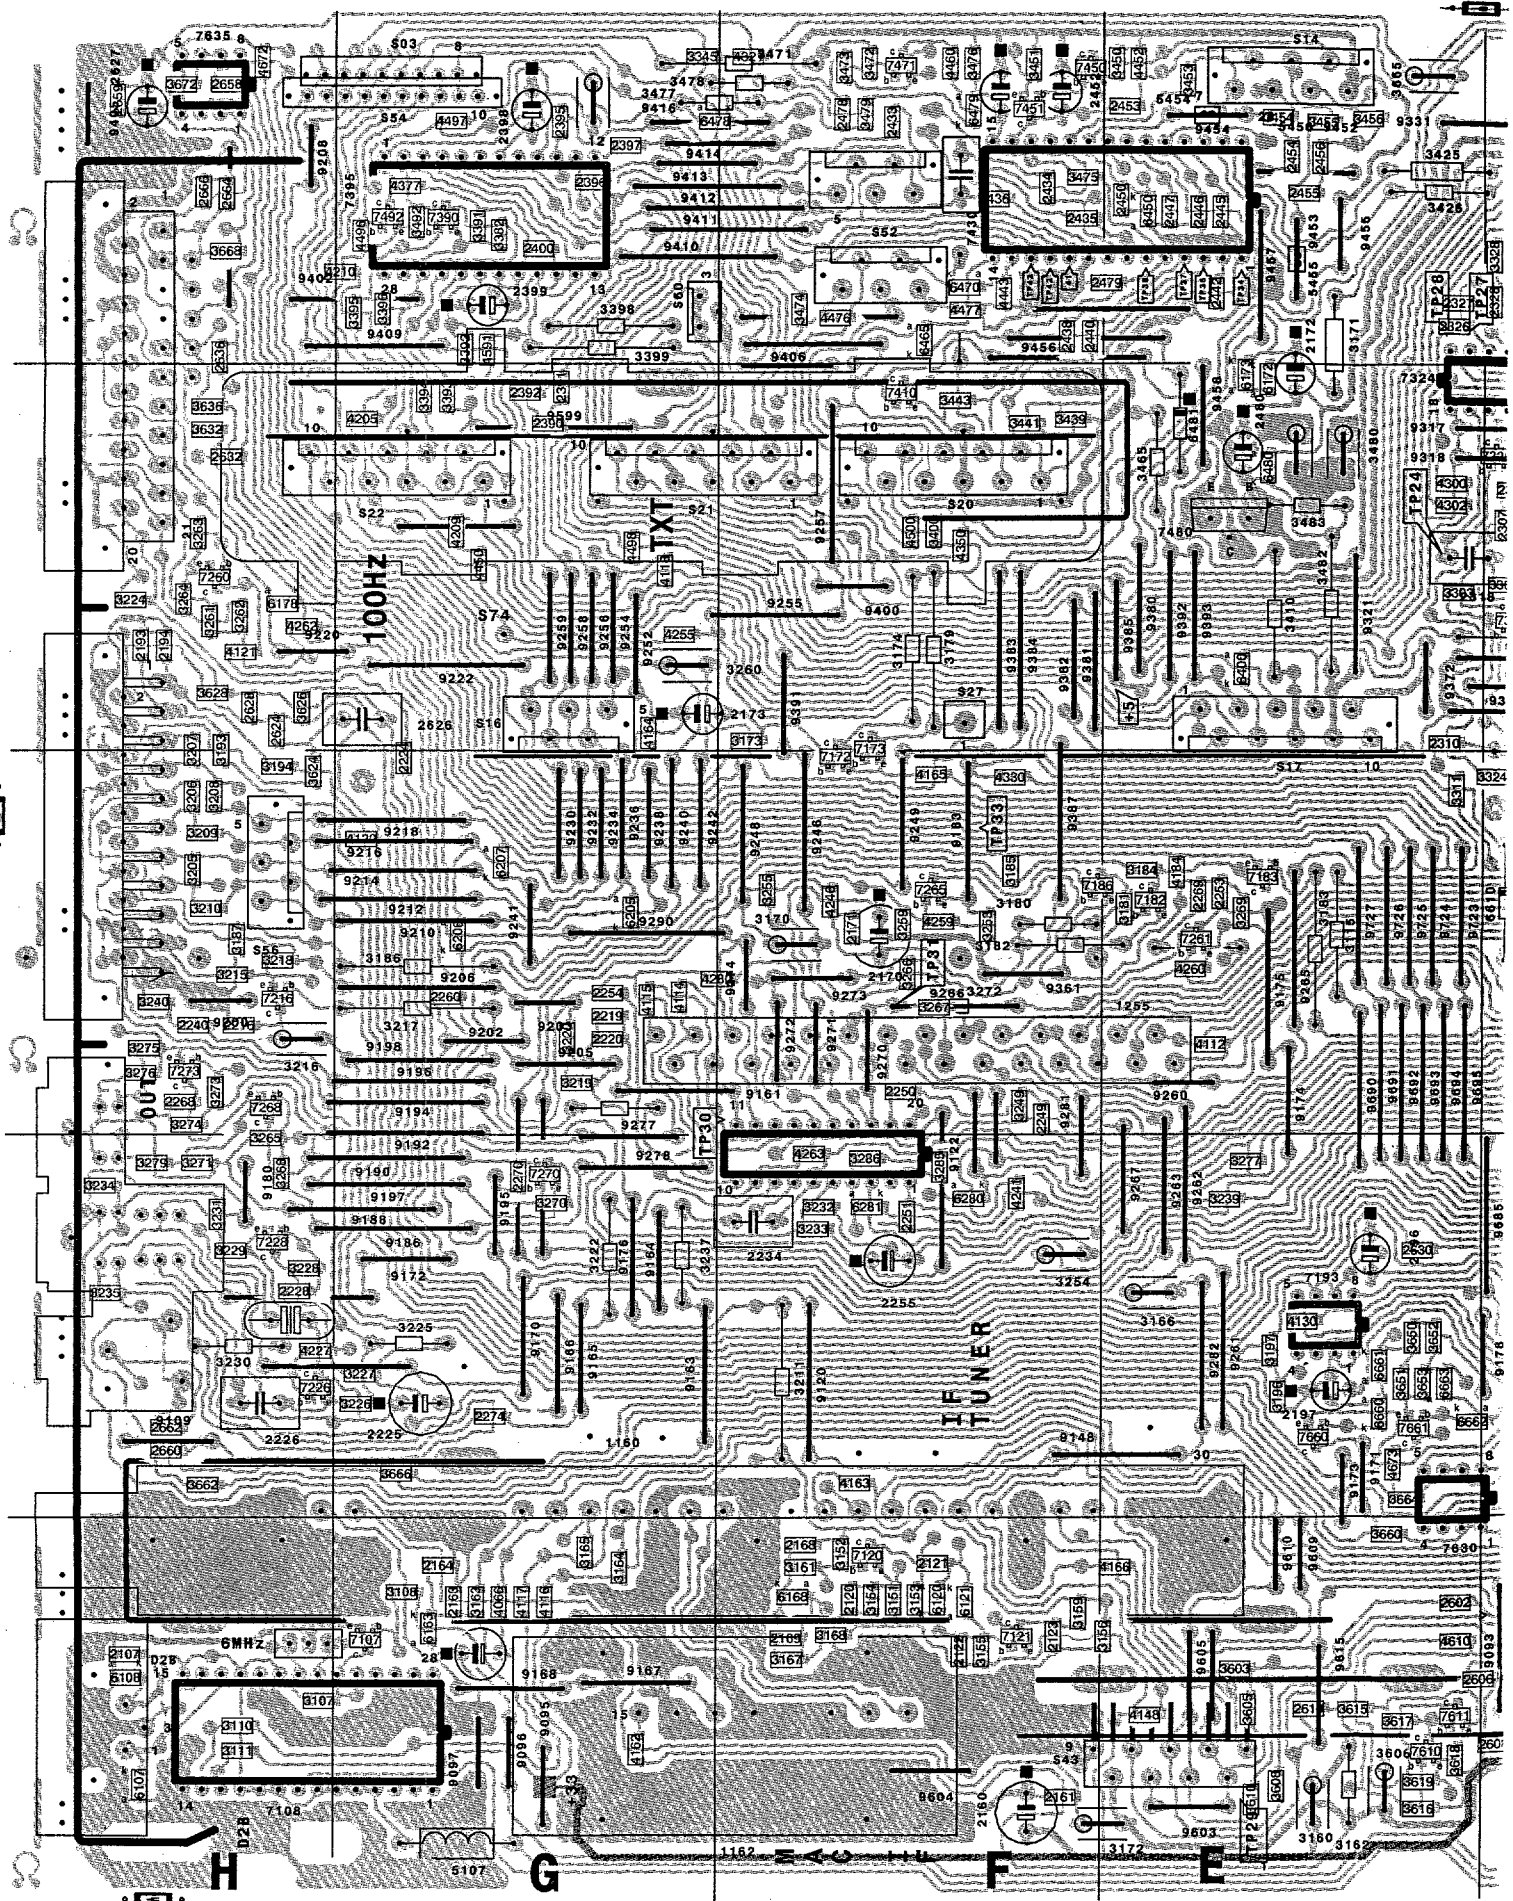

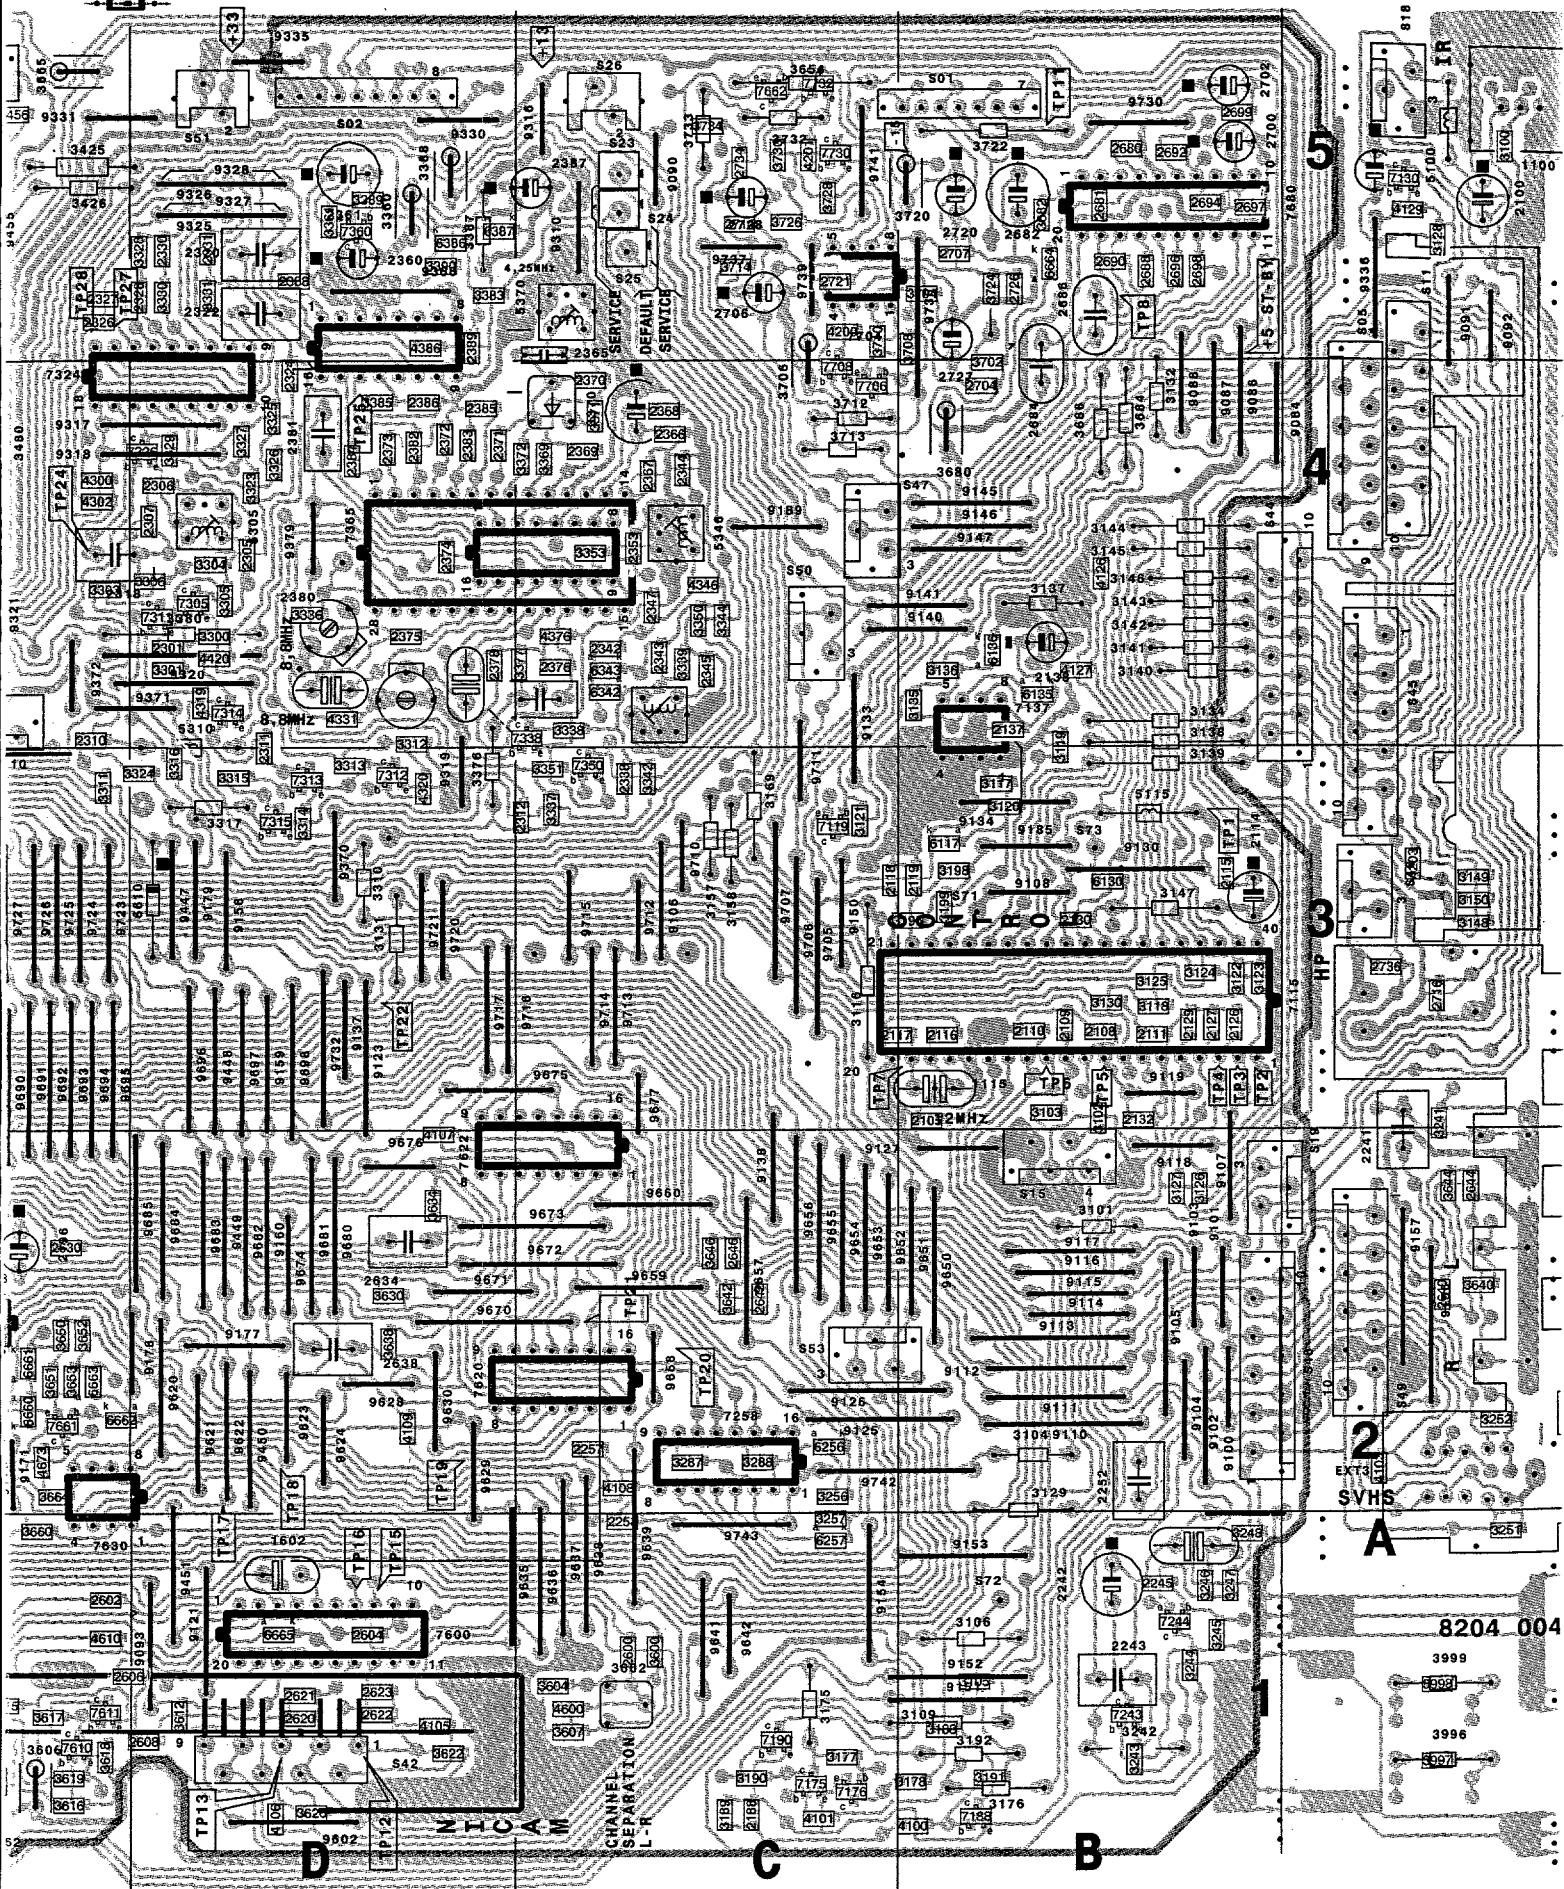

8204 004


SVHS  
A





**D**

**Chrominance processing  
Chrominanz-Processor  
Processore della crominanza  
Traitement chrominance**

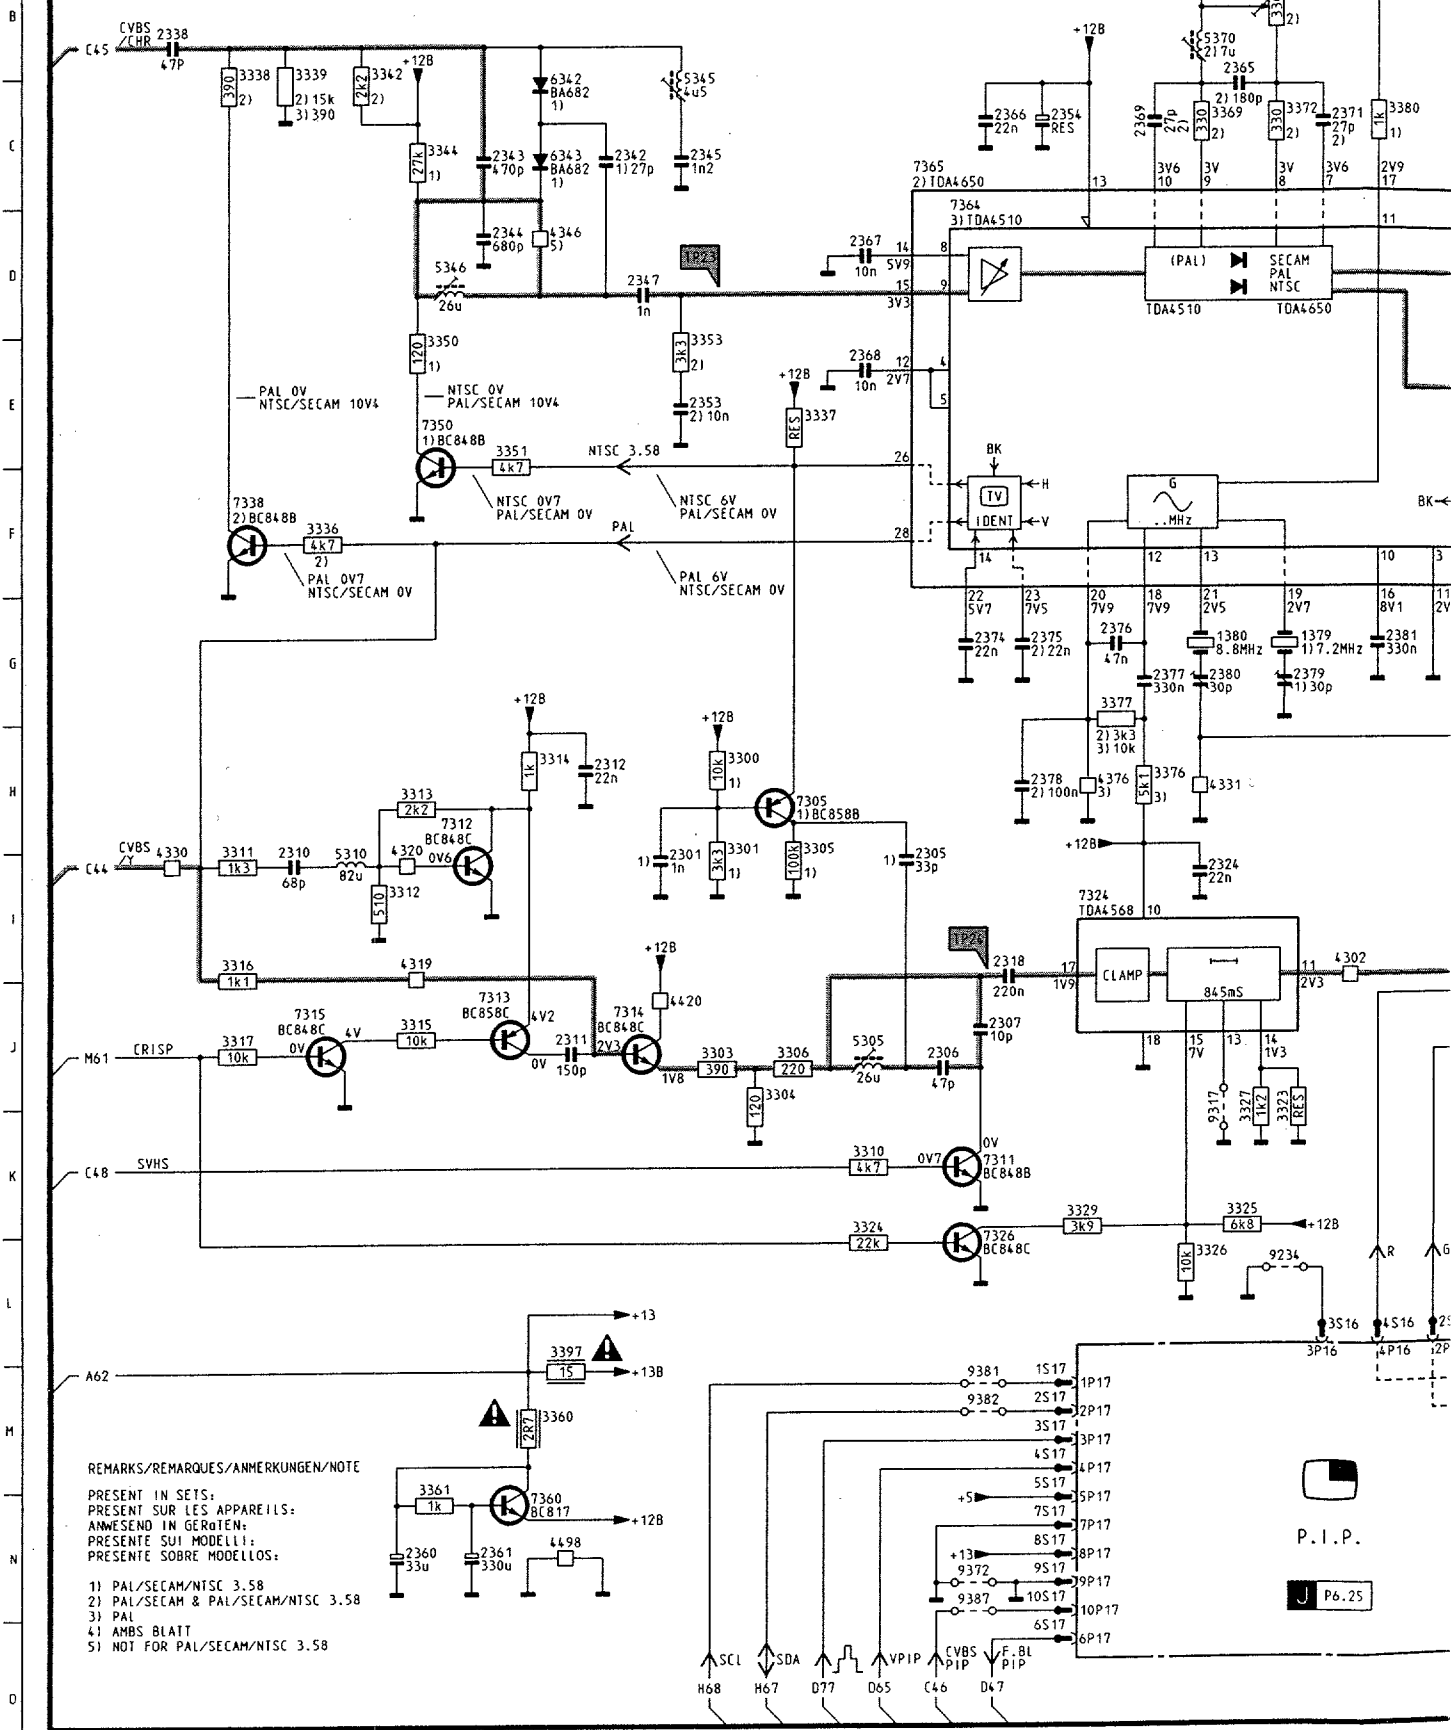


REMARKS/REMARQUES/ANMERKUNGEN/NOTE

- PRESENT IN SETS:
  - PRESENT SUR LES APPAREILS:
  - ANWESEND IN GERÄTEN:
  - PRESENTE SUI MODELLI:
  - PRESENTE SOBRE MODELOS:
- 1) PAL/SECAM/NTSC 3.58
  - 2) PAL/SECAM & PAL/SECAM/NTSC 3.58
  - 3) PAL
  - 4) AMBS BLATT
  - 5) NOT FOR PAL/SECAM/NTSC 3.58

P. I. P.

P6.25

# Traitement vidéo

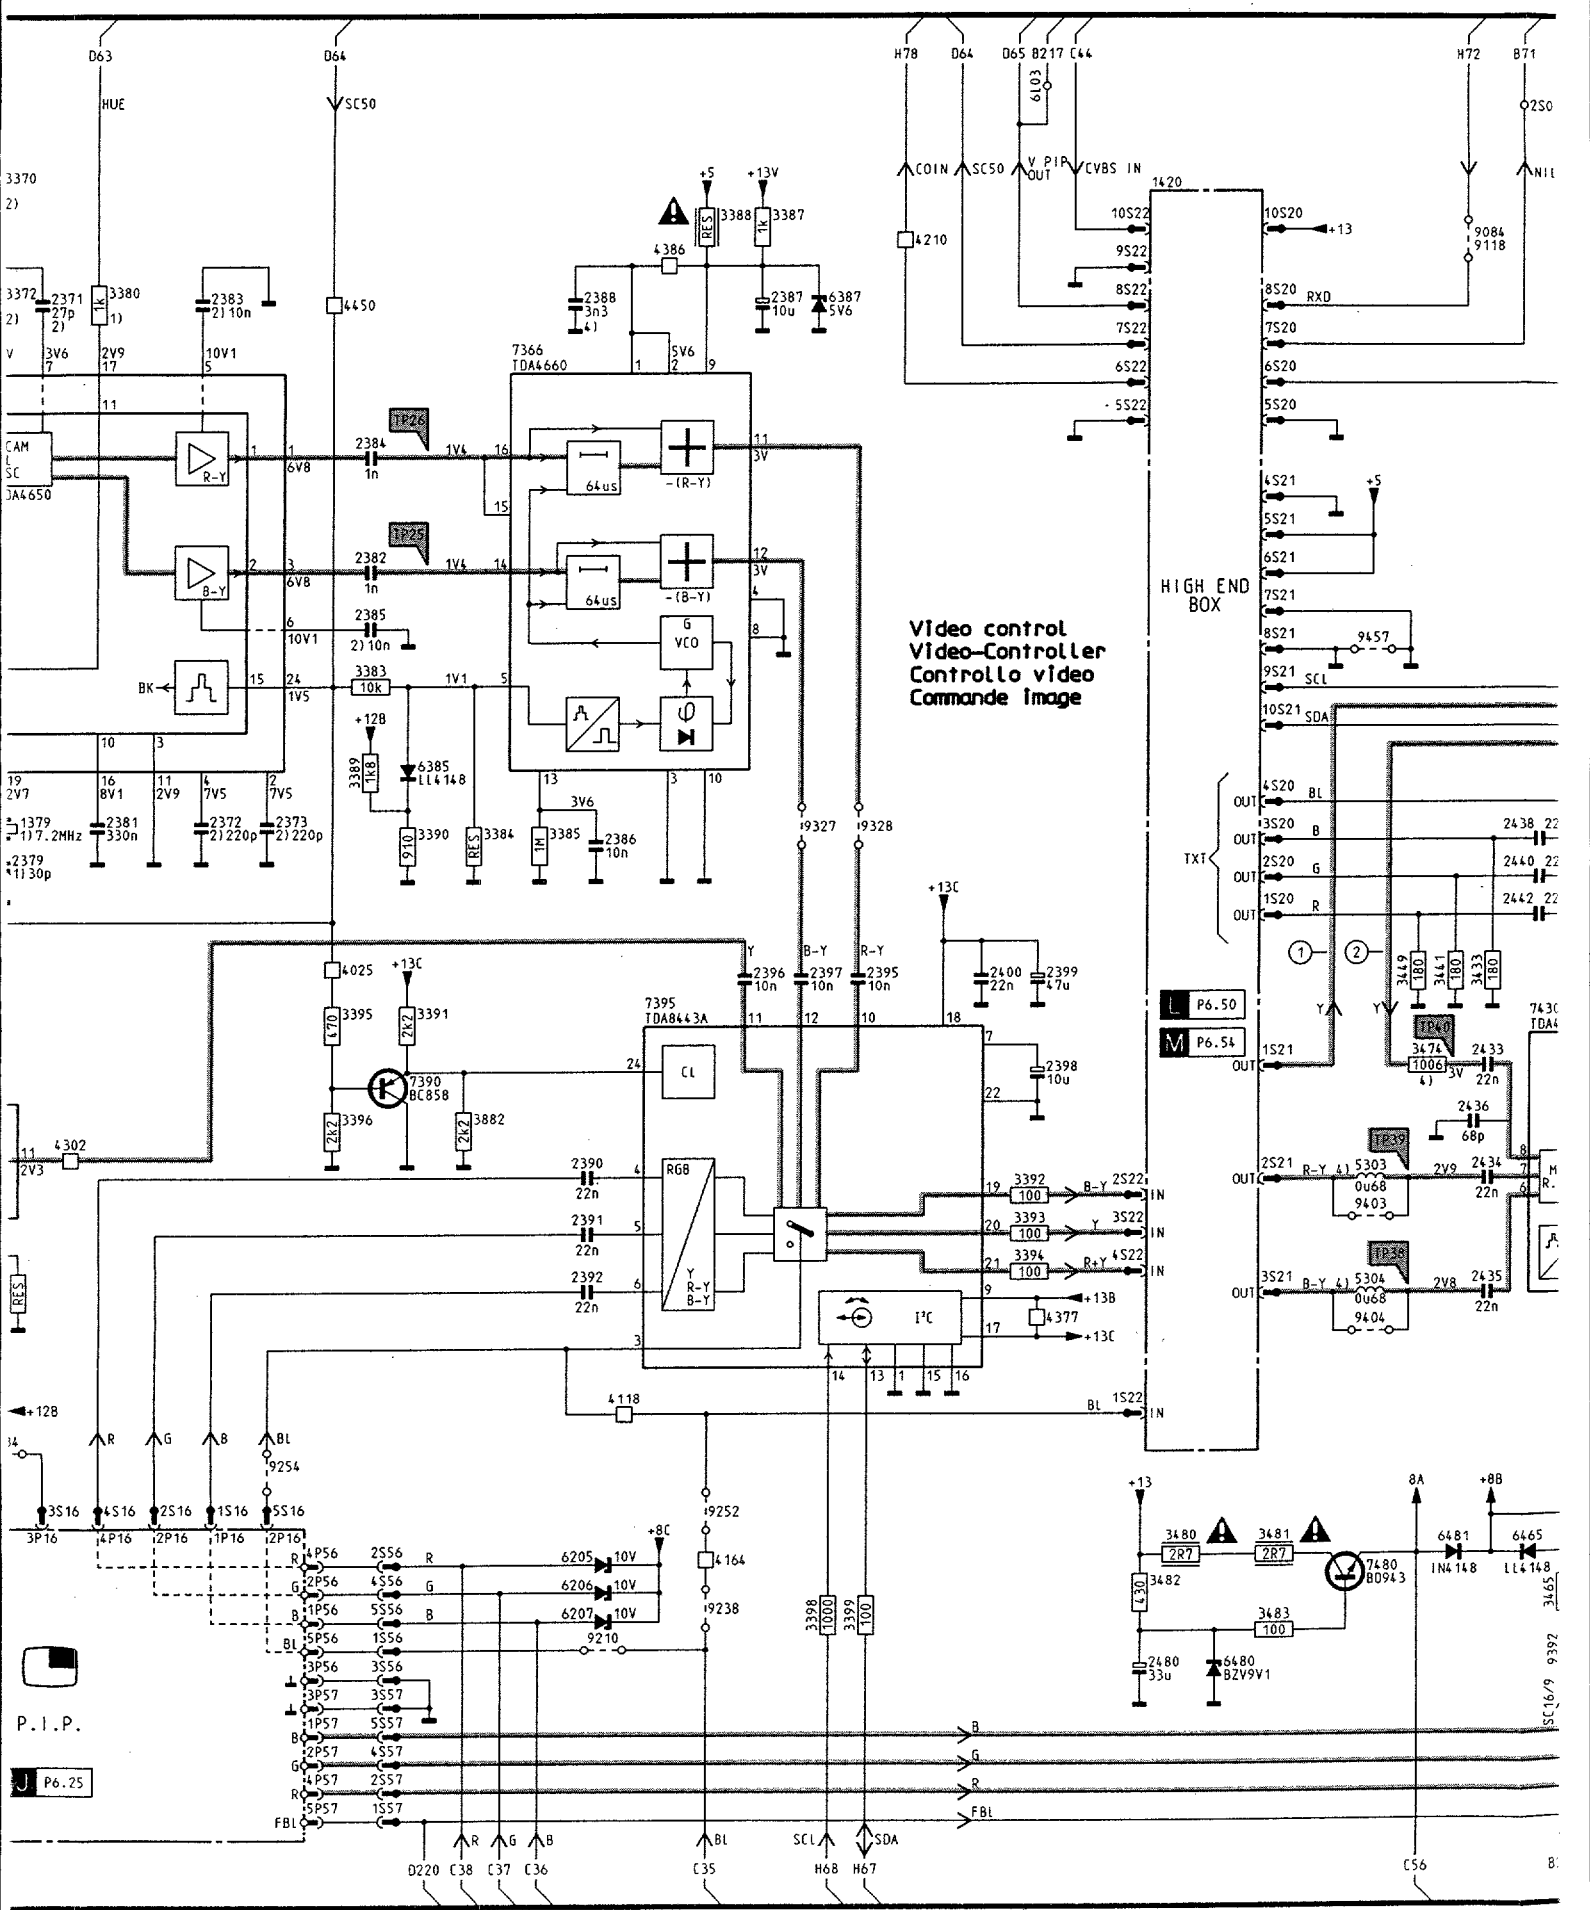


Video control  
Video-Controller  
Controllo video  
Comande image

HIGH END BOX

P6.50  
P6.54


P.I.P.


P6.25

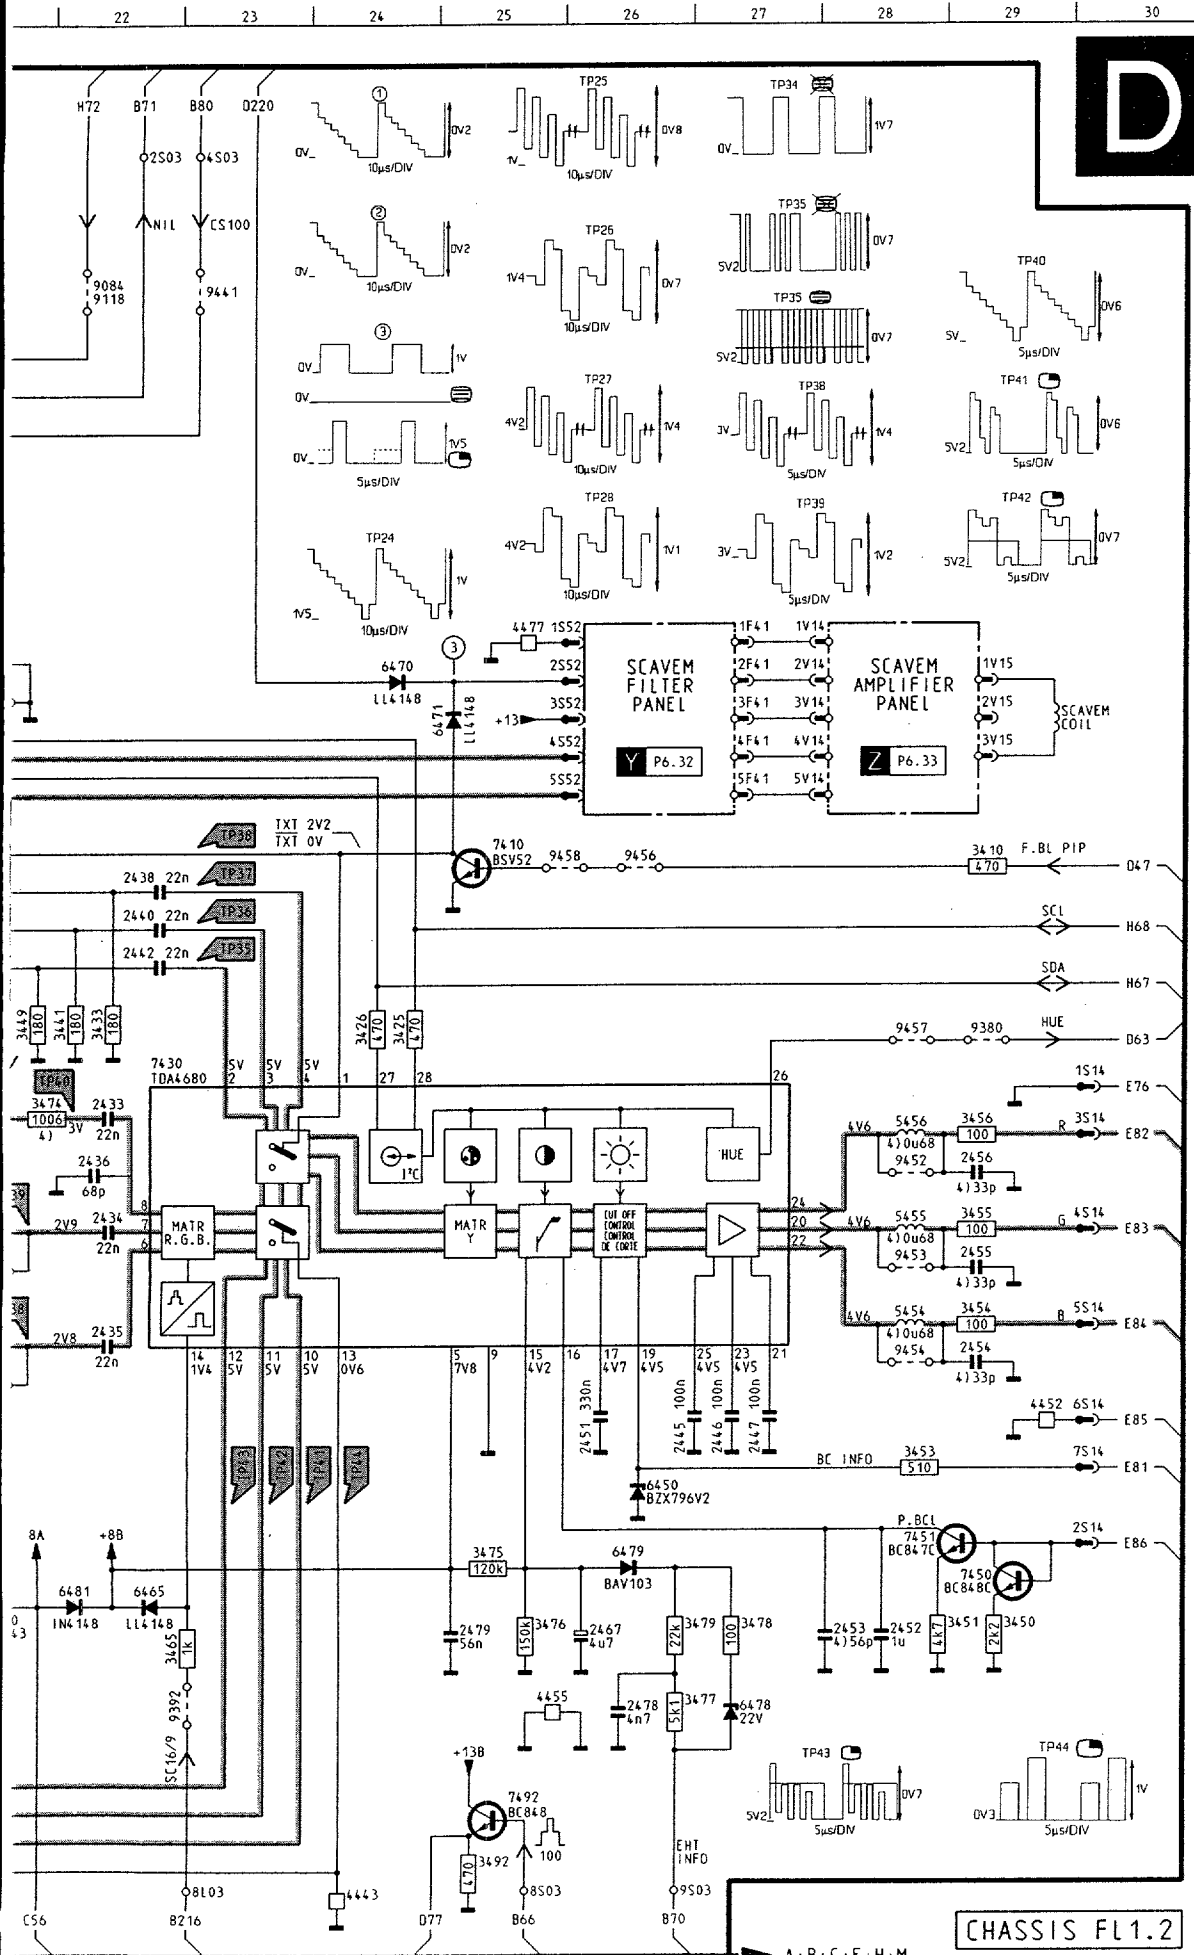


1379	G10	3388	B16	9381	M 8
1380	G10	3389	F13	9382	M 8
1420	B19	3390	G13	9387	M 8
2301	I 5	3391	H13	9392	M23
2305	I 7	3392	J18	9403	J21
2306	J 8	3393	J18	9404	K21
2307	J 8	3394	J18	9411	B23
2310	I 2	3395	H13	9452	I28
2311	J 5	3396	I13	9453	J28
2312	H 5	3397	L 5	9454	K28
2318	I 8	3398	M17	9456	G26
2324	I10	3399	M17	9457	H28
2328	B 1	3410	G29	9457	E21
2342	C 5	3425	H24	9458	G26
2343	C 4	3426	H24		
2344	D 4	3433	H22		
2345	C 6	3441	H22		
2347	D 5	3449	H21		
2353	E 6	3450	M29		
2354	C 8	3451	M29		
2360	N 3	3453	K28		
2361	N 4	3454	J29		
2365	B10	3455	J29		
2366	C 8	3456	I29		
2367	D 7	3465	M22		
2368	E 7	3474	I21		
2369	C 9	3475	L25		
2371	C11	3476	M25		
2372	G12	3477	M26		
2373	G12	3478	M27		
2374	G 8	3479	M26		
2375	G 8	3480	L20		
2376	G 9	3481	L20		
2377	G 9	3482	M19		
2378	H 8	3483	M20		
2379	G10	3492	O25		
2380	G10	3882	I14		
2381	G11	4025	H13		
2382	E13	4118	K15		
2383	C12	4164	M16		
2384	D13	4210	B17		
2385	E13	4302	I11		
2386	G15	4319	I 3		
2387	C16	4320	I 3		
2388	C15	4330	I 1		
2390	J15	4331	H10		
2391	J15	4346	D 4		
2392	J15	4376	H 9		
2395	H17	4377	K18		
2396	H16	4386	B15		
2397	H17	4420	J 5		
2398	I18	4443	O24		
2399	H18	4450	C13		
2400	H18	4452	K29		
2433	I22	4455	M25		
2434	J22	4477	E25		
2435	J22	4498	N 5		
2436	I22	5303	J21		
2438	G22	5304	K21		
2440	G22	5305	J 7		
2442	H22	5310	I 3		
2445	K26	5345	C 6		
2446	K27	5346	D 4		
2447	K27	5370	B10		
2451	K26	5454	J28		
2452	M28	5455	J28		
2453	M28	5456	I28		
2454	K29	6205	M15		
2455	J29	6206	M15		
2456	I29	6207	M15		
2467	M26	6342	C 4		
2478	M26	6343	C 4		
2479	M25	6385	F13		
2480	M19	6387	C17		
3300	H 6	6450	L26		
3301	H 6	6465	M22		
3303	J 6	6470	E24		
3304	J 6	6471	F25		
3305	H 6	6478	M27		
3306	J 6	6479	L26		
3310	K 7	6480	M20		
3311	I 2	6481	M22		
3312	I 3	7305	H 6		
3313	H 3	7311	K 8		
3314	H 4	7312	H 4		
3315	J 3	7313	J 4		
3316	I 2	7314	J 5		
3317	J 2	7315	J 3		
3323	K10	7324	I 9		
3324	K 7	7326	L 8		
3325	K10	7338	F 2		
3326	L10	7350	E 3		
3327	K10	7360	N 4		
3329	K 9	7364	D 8		
3336	F 3	7365	C 7		
3337	E 6	7366	C14		
3338	B 2	7390	I13		
3339	B 2	7395	H15		
3342	B 3	7410	G25		
3344	C 3	7430	H22		
3350	D 3	7450	L29		
3351	E 4	7451	L28		
3353	D 6	7480	M21		
3360	M 4	7492	N25		
3361	N 4	9084	B22		
3369	C10	9118	B22		
3370	B10	9210	M15		
3371	B10	9234	L10		
3372	C10	9238	M16		
3376	H 9	9252	L16		
3377	G 9	9254	L12		
3380	C11	9317	K10		
3383	F13	9327	G17		
3384	G14	9328	G17		
3385	G15	9372	N 8		
3387	B16	9380	H29		

CHASSIS FL1.2  
CL16532023/014, DREF  
270691


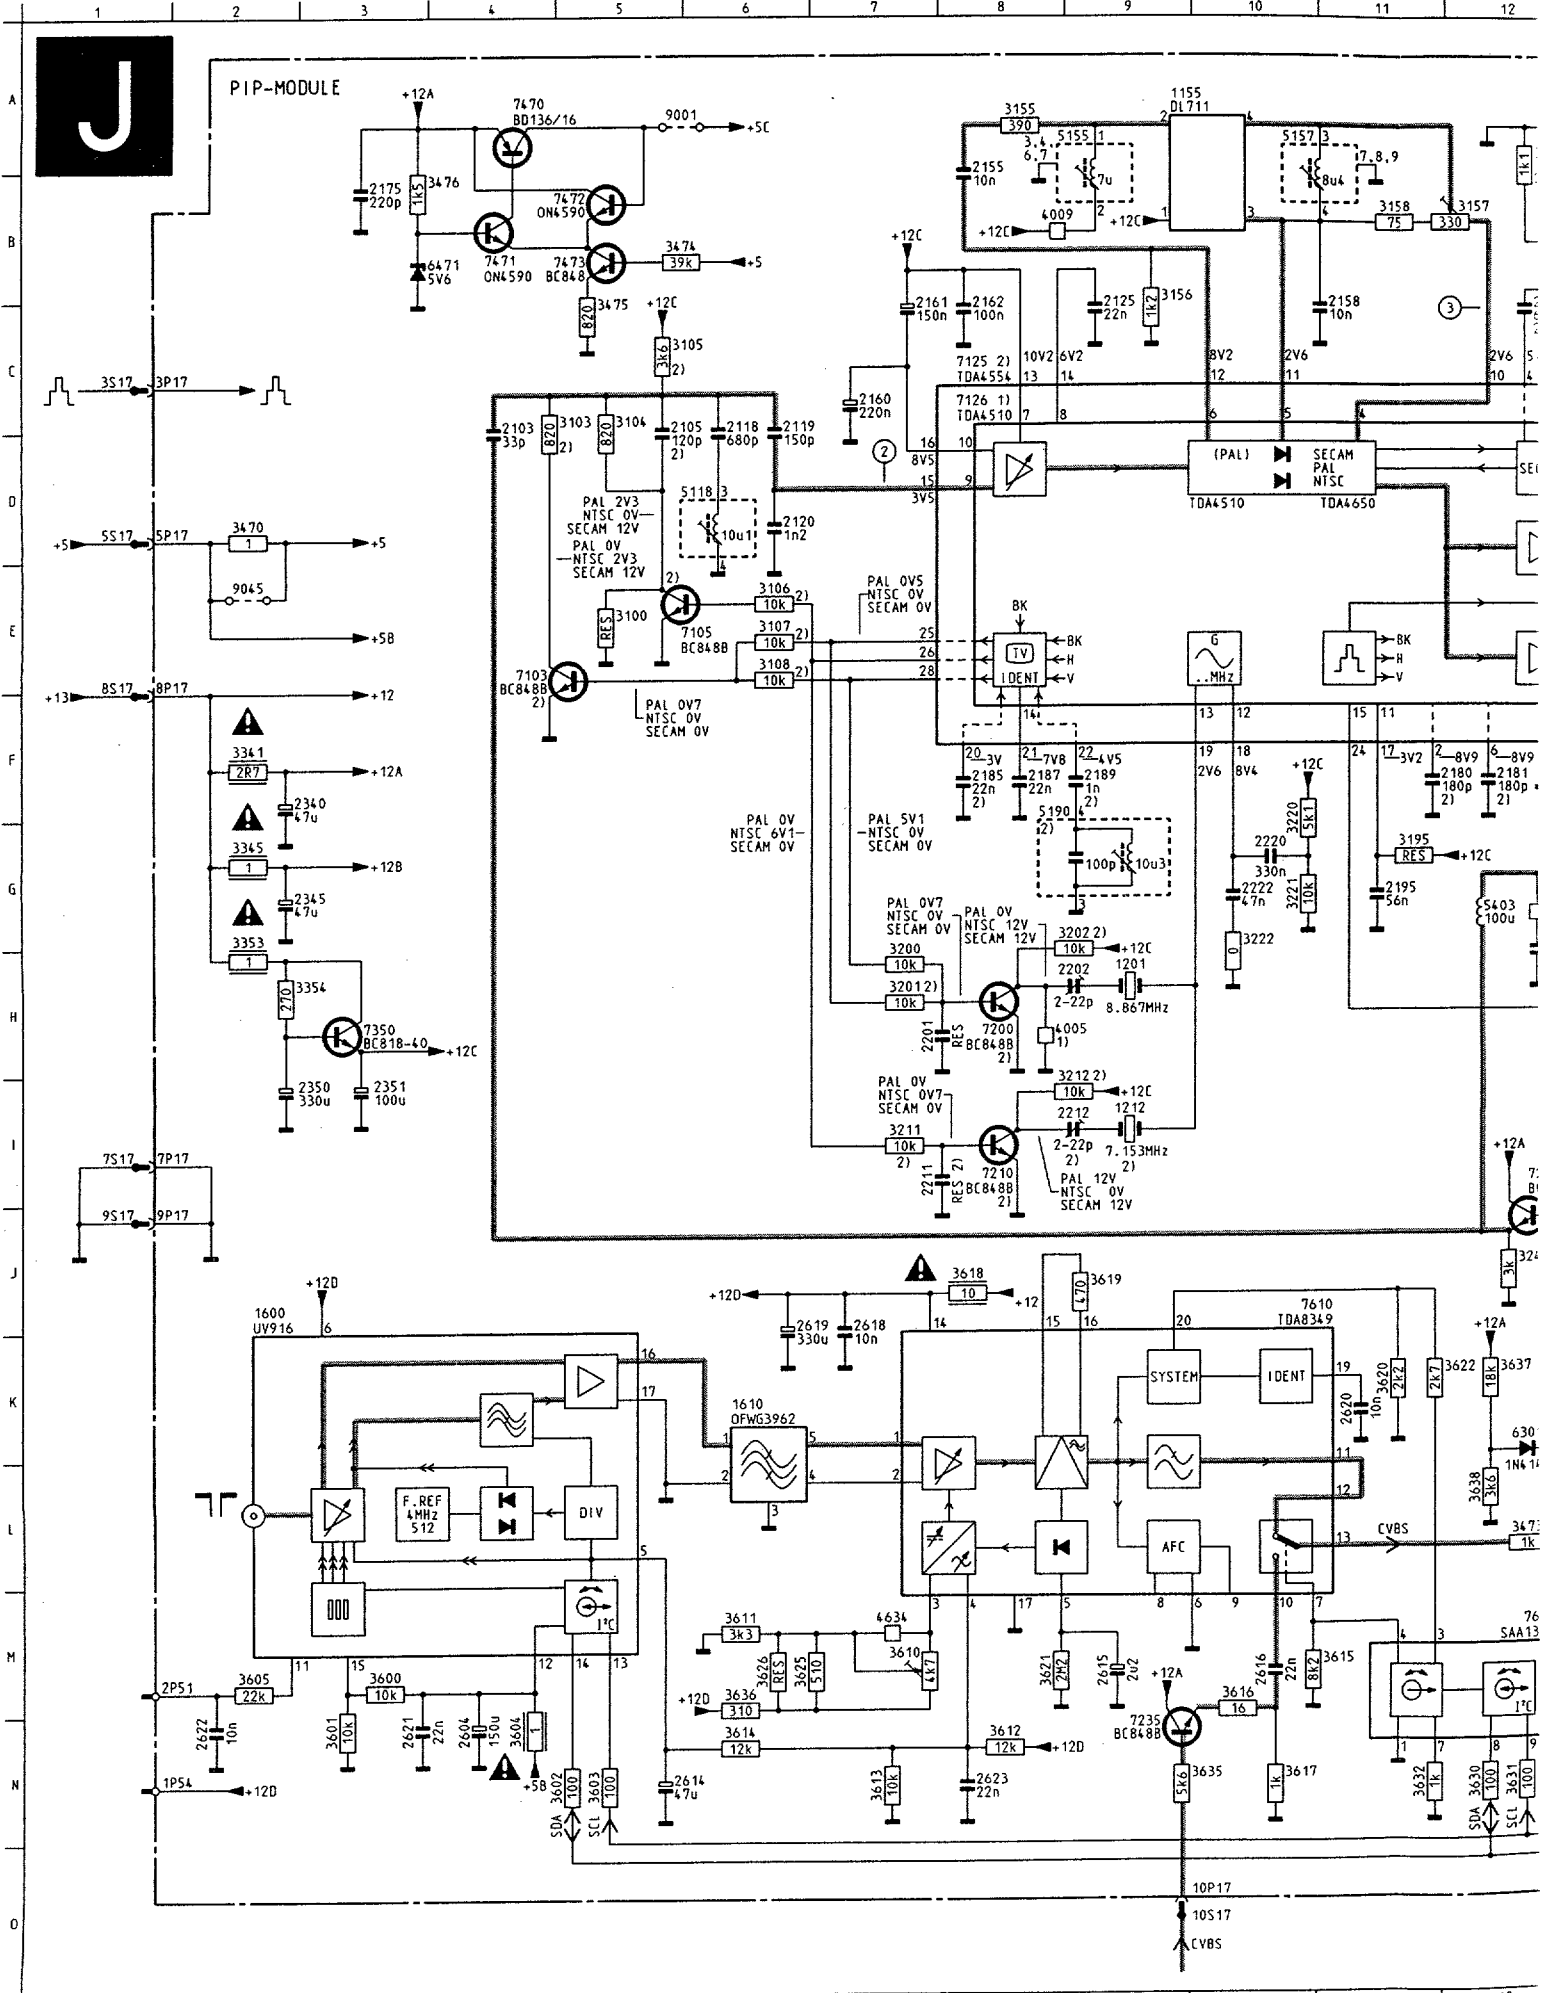


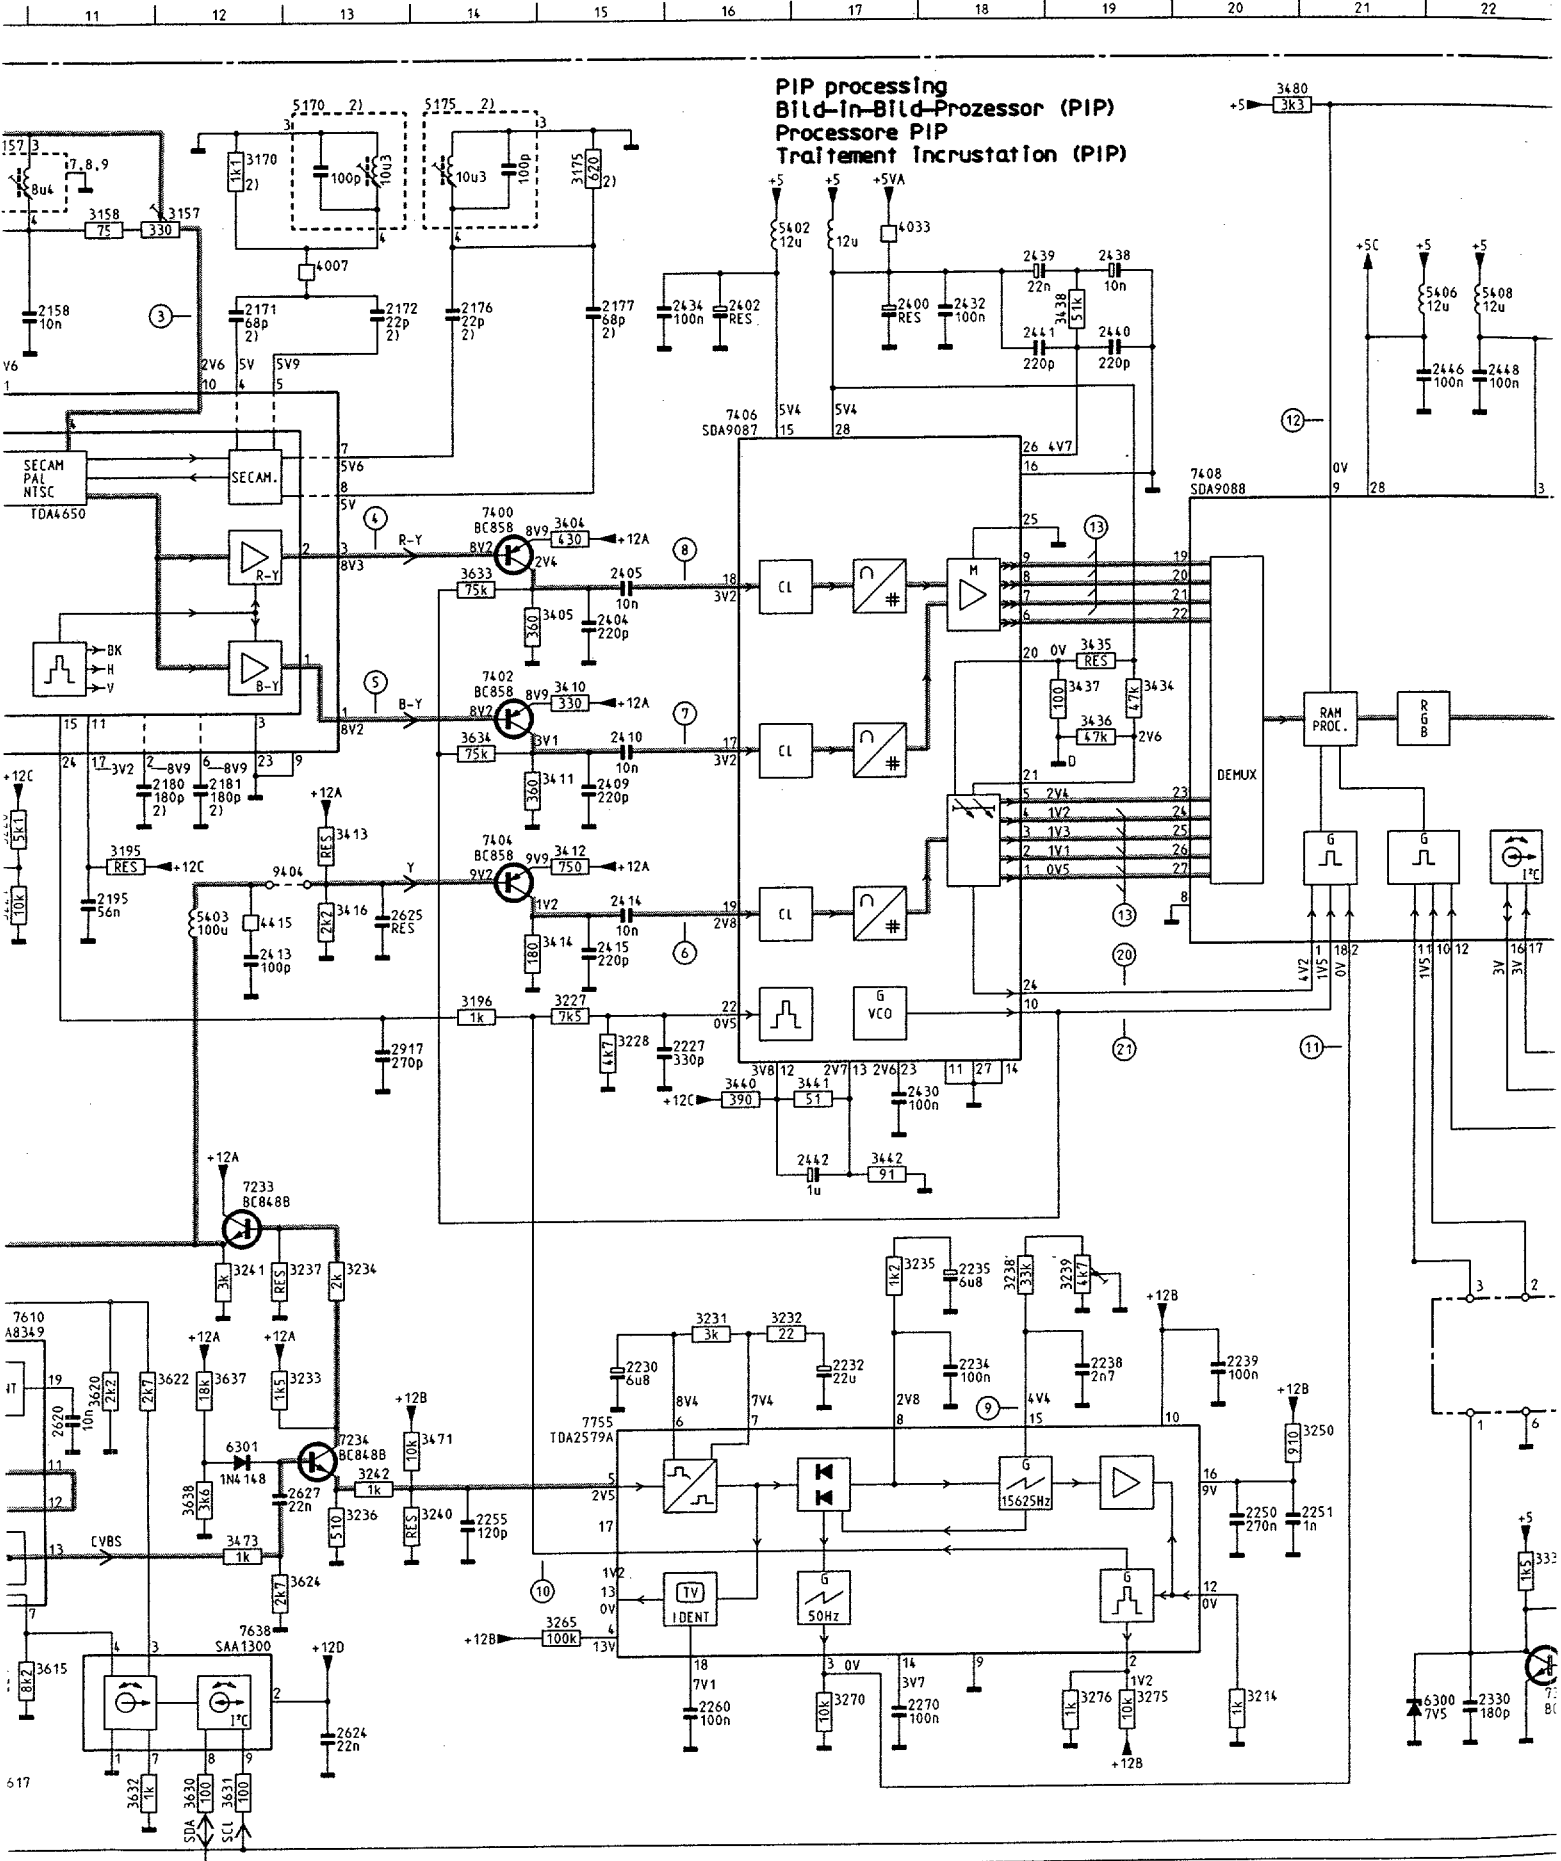

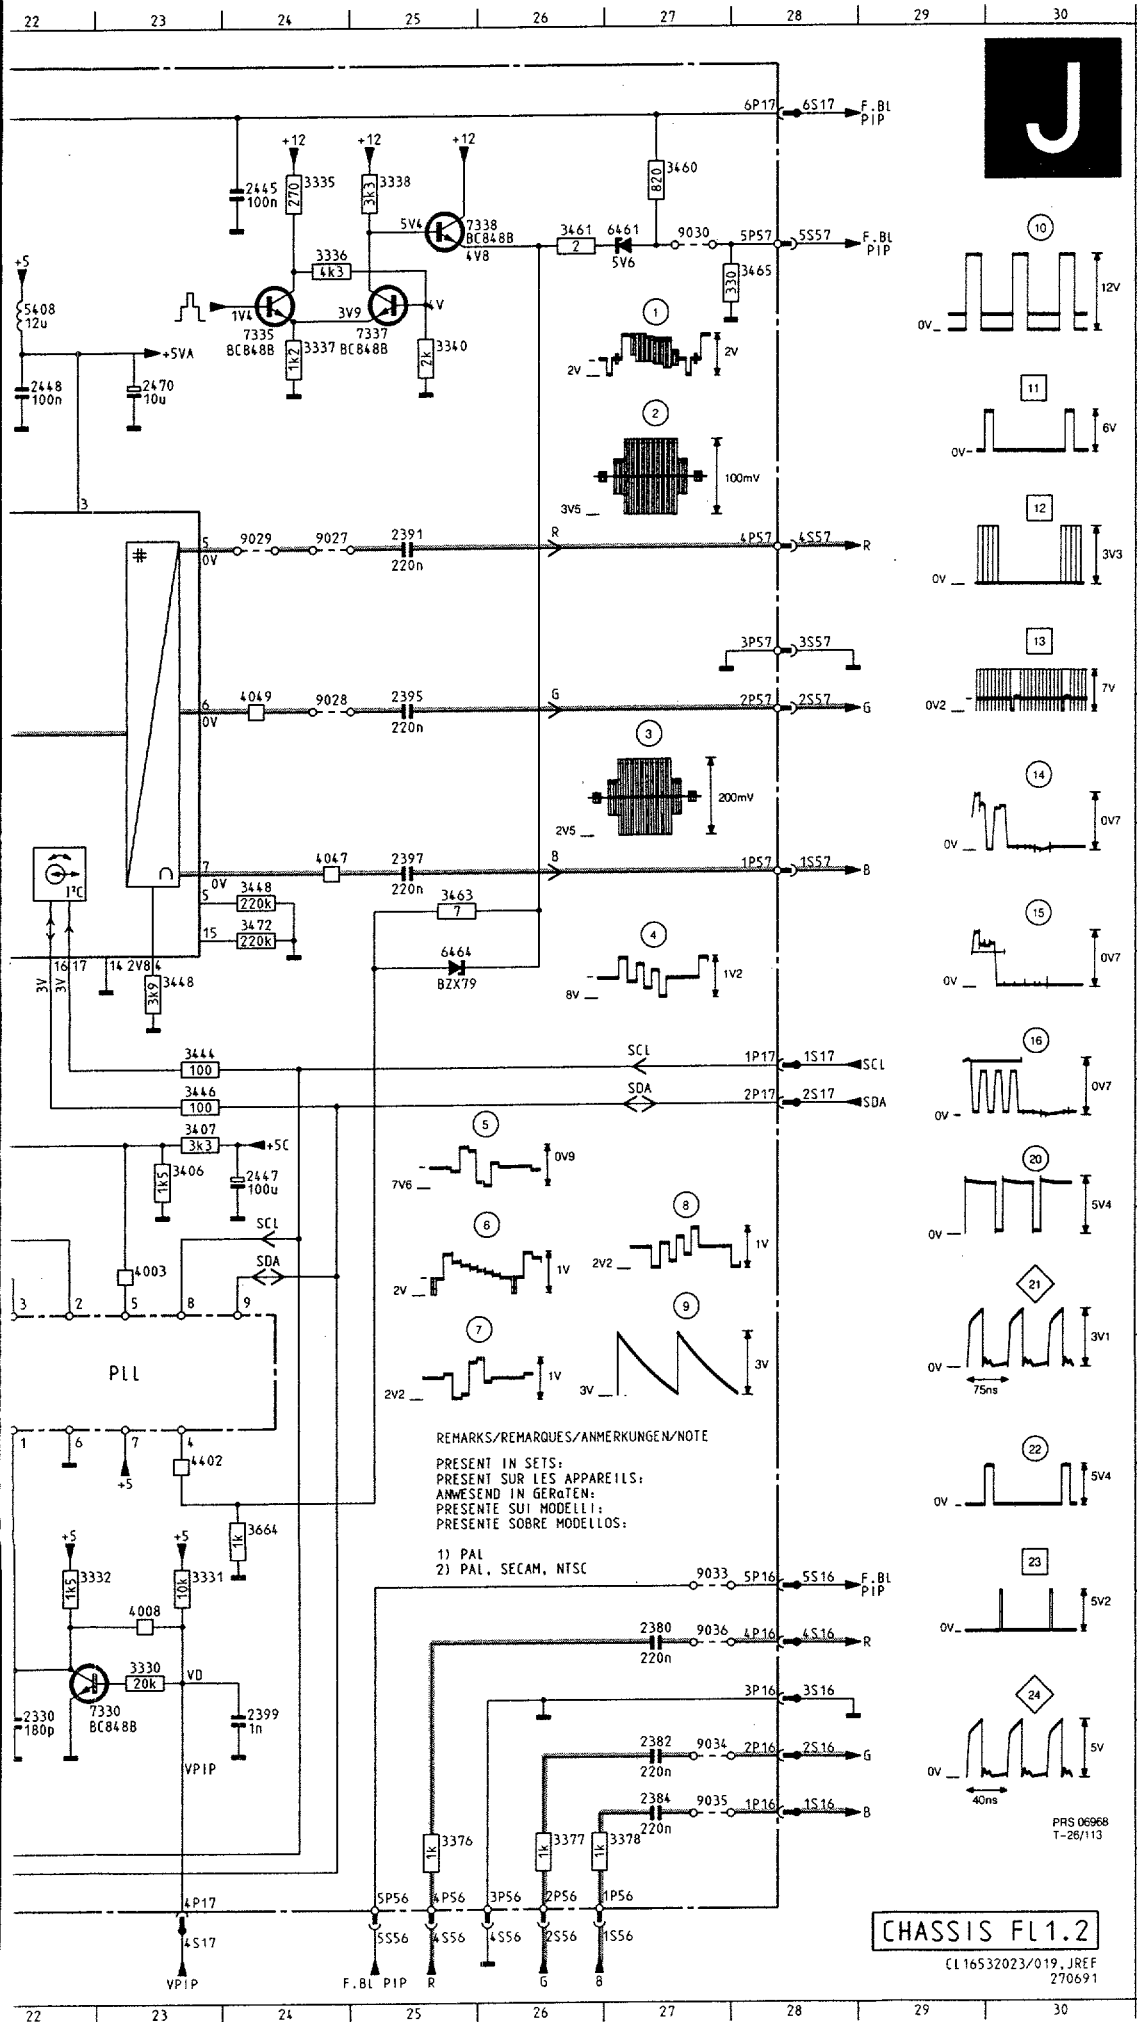



REMARKS/REMARQUES/ANMERKUNGEN/NOTE  
 PRESENT IN SETS:  
 PRESENT SUR LES APPAREILS:  
 ANWESEND IN GERÄTEN:  
 PRESENTE SUI MODELLI:  
 PRESENTE SOBRE MODELLLOS:

- 1) PAL
- 2) PAL, SECAM, NTSC

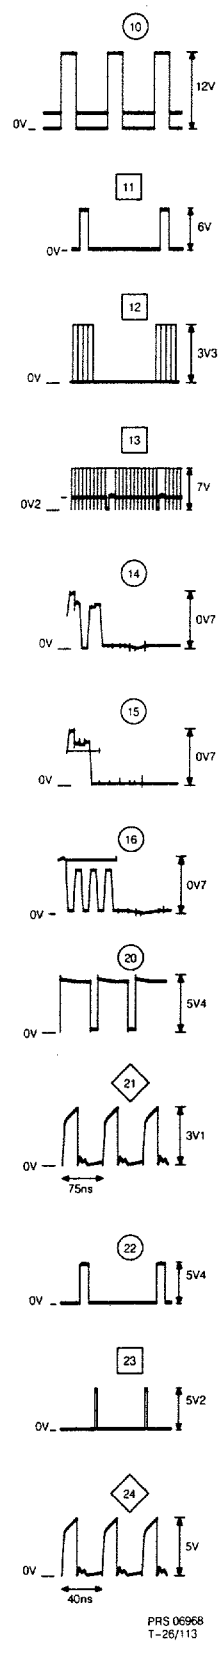



1155	A 9	3222	G10	5175	A14
1201	H 9	3227	H15	5190	G 8
1212	I 9	3228	H15	5402	B16
1600	J 2	3231	J16	5403	G12
1610	K 6	3232	K16	5406	C21
2103	D 4	3233	K13	5408	C22
2105	D 5	3234	J13	6300	M21
2118	D 6	3235	J17	6301	K12
2119	D 6	3236	L13	6461	B27
2120	D 6	3237	J13	6464	H25
2125	C 9	3238	J18	6471	B 3
2155	B 8	3239	J19	7103	E 4
2158	C11	3240	L14	7105	E 5
2160	C 7	3241	J12	7125	C 8
2161	C 7	3242	L13	7126	C 8
2162	C 8	3250	K21	7200	H 8
2171	C12	3265	M15	7210	I 8
2172	C13	3270	M17	7233	I12
2175	B 3	3275	M19	7234	K13
2176	C14	3276	M19	7235	N 9
2177	C15	3300	M23	7300	M22
2180	F11	3331	L23	7335	C24
2181	F12	3332	L22	7337	C25
2185	F 8	3335	A24	7338	B25
2187	F 8	3336	B24	7350	H 3
2189	F 9	3337	C24	7400	D14
2195	G11	3338	A25	7402	E14
2201	H 7	3340	C25	7404	G14
2202	H 9	3341	F 2	7408	C16
2211	I 7	3345	G 2	7408	D20
2212	I 9	3353	G 2	7470	A 4
2220	G10	3354	H 2	7471	B 4
2222	G10	3376	N25	7472	B 5
2227	H16	3377	N26	7473	B 5
2230	K15	3378	N27	7610	J11
2232	K17	3404	O15	7638	M12
2234	K18	3405	E15	7755	K15
2235	J18	3406	I23	9001	A 5
2238	K19	3407	I23	9027	D24
2239	K20	3410	F15	9028	F24
2250	L20	3411	F15	9029	D24
2251	L21	3412	G15	9030	B27
2255	L14	3413	G13	9033	L27
2260	M16	3414	G15	9034	N27
2270	M17	3416	G13	9035	N27
2330	M22	3434	E19	9036	M27
2340	F 2	3435	E19	9045	E 2
2345	G 2	3436	E19	9404	G13
2350	I 2	3437	F19		
2351	I 3	3438	C19		
2380	M27	3440	I16		
2382	N27	3441	I17		
2384	N27	3442	I17		
2391	D25	3444	H23		
2395	F25	3446	I23		
2397	G25	3448	H23		
2399	M24	3448	G24		
2400	C17	3460	A27		
2402	C16	3461	B26		
2404	E15	3463	G25		
2405	E15	3465	B28		
2409	F15	3470	D 2		
2410	F15	3471	K14		
2413	H12	3472	G24		
2414	G15	3473	L12		
2415	H15	3474	B 5		
2430	I17	3475	B 5		
2432	C18	3476	B 3		
2434	C16	3480	A20		
2438	B19	3600	M 3		
2439	B18	3601	N 3		
2440	C19	3602	N 5		
2441	C18	3603	N 5		
2442	I17	3604	N 4		
2445	B24	3605	M 2		
2446	C22	3610	M 7		
2447	I24	3611	M 6		
2448	C22	3612	N 8		
2470	C23	3613	N 7		
2604	N 4	3614	N 6		
2614	N 5	3615	M11		
2615	M 9	3616	M10		
2616	M10	3617	N10		
2618	K 7	3618	J 8		
2619	K 6	3619	J 9		
2620	K11	3620	K11		
2621	N 3	3621	M 8		
2622	N 2	3622	K12		
2623	N 8	3624	L13		
2624	M13	3625	M 6		
2625	G13	3626	M 6		
2627	L13	3630	N12		
2917	H13	3631	N12		
3100	E 5	3632	N11		
3103	C 5	3633	E14		
3104	C 5	3634	F14		
3105	C 5	3635	N10		
3106	E 6	3636	M 6		
3107	E 6	3637	K12		
3108	E 6	3638	L12		
3155	A 8	3664	L24		
3156	B 9	4003	J23		
3157	B12	4005	H 8		
3158	B11	4007	B13		
3170	A12	4008	M23		
3175	A15	4009	B 8		
3195	G11	4033	B17		
3196	H14	4047	G24		
3200	H 7	4049	F24		
3201	H 7	4402	K23		
3202	G 9	4415	G12		
3211	I 7	4634	M 7		
3212	I 9	5118	D 5		
3214	M20	5155	A 8		
3220	G10	5157	A10		
3221	G10	5170	A13		

CHASSIS FL1.2  
 CL16532023/019, JREF  
 270691

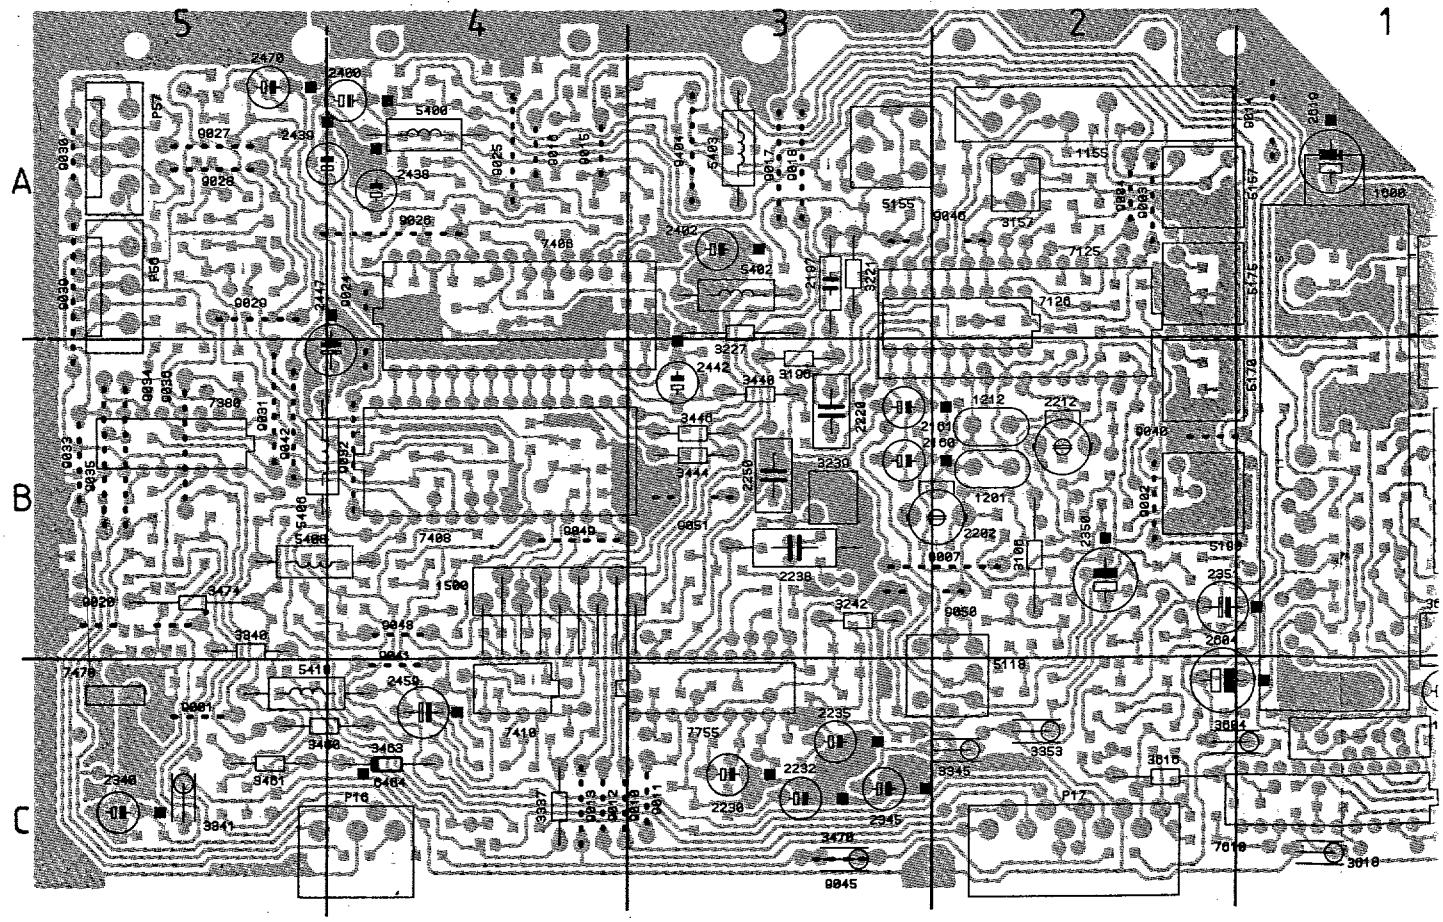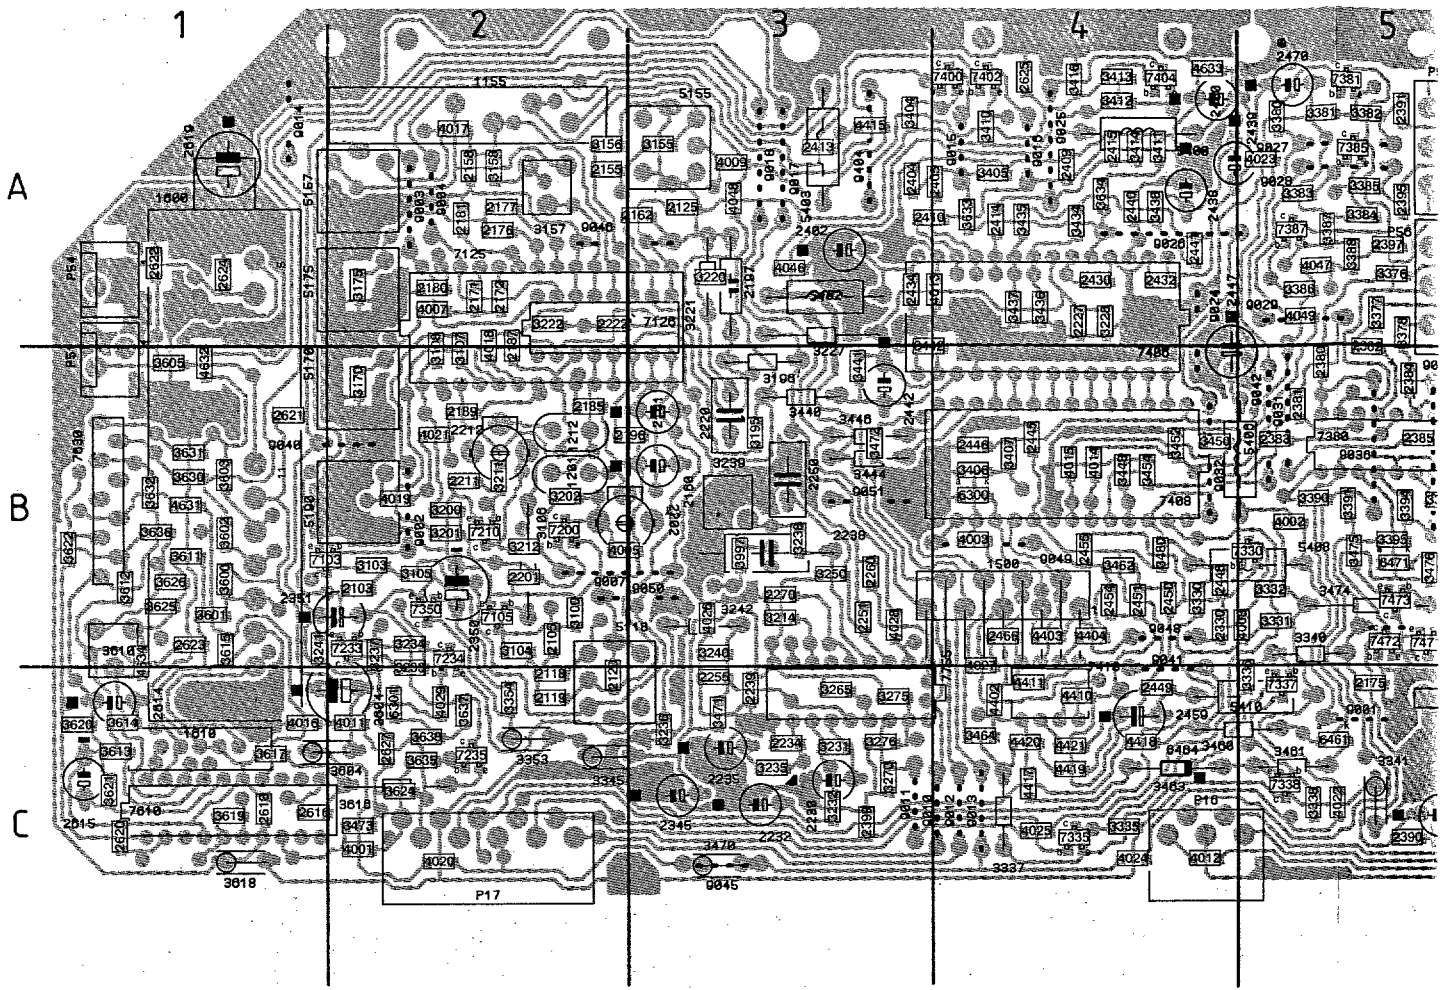


# Image dans L'image

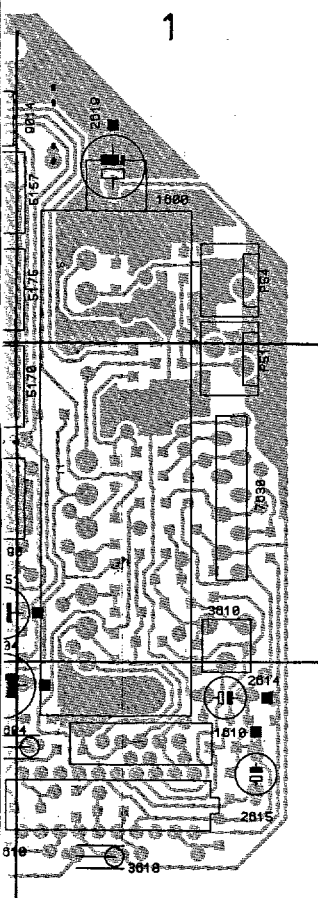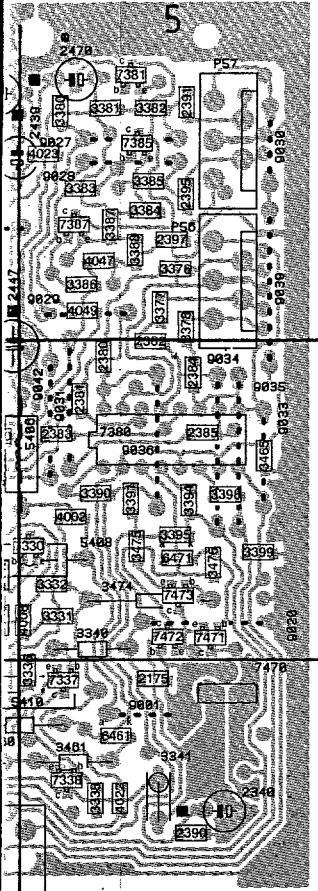


1155 A2	2430 A4	3250 B3	3475 B5	4418 C4	9020 B5
1201 B2	2432 A4	3265 C3	3476 B5	4419 C4	9024 A4
1212 B2	2434 A3	3270 C3	3480 B4	4420 C4	9025 A4
1500 B4	2438 A4	3275 C3	3600 B1	4421 C4	9026 A4
1600 A1	2439 A5	3278 C3	3601 B1	4631 B1	9027 A5
1610 C1	2440 A4	3330 B4	3602 B1	4632 B1	9028 A5
2103 B2	2441 A4	3331 B5	3603 B1	4633 A4	9029 A5
2105 B2	2442 B3	3332 B5	3604 C1	4634 B1	9030 A5
2118 C2	2445 B4	3335 C4	3605 B1	5118 B2	9031 B5
2119 C2	2446 B4	3336 C5	3610 B1	5155 A3	9032 B4
2120 C2	2447 A4	3337 C4	3611 B1	5157 A1	9033 B5
2125 A3	2448 B4	3338 C5	3612 B1	5170 B2	9034 B5
2155 A2	2449 C4	3340 B5	3613 C1	5175 A1	9035 B5
2158 A2	2450 B4	3341 C5	3614 C1	5190 B2	9036 B5
2160 B3	2451 B4	3345 C2	3615 B2	5400 A4	9039 A5
2161 B3	2454 B4	3353 C2	3616 C1	5402 A3	9040 B2
2162 A3	2455 B4	3354 C2	3617 C1	5403 A3	9041 C4
2171 A2	2459 C4	3376 A5	3618 C1	5406 B5	9042 B5
2172 A2	2466 B4	3377 A5	3619 C1	5408 B5	9045 C3
2175 C5	2470 A5	3378 A5	3620 C1	5410 C5	9046 A2
2176 A2	2604 C3	3380 A5	3621 C1	6300 B4	9048 B4
2177 A2	2614 C1	3381 A5	3622 B1	6301 C2	9049 B4
2180 A2	2615 C1	3382 A5	3624 C2	6461 C5	9050 B3
2181 A2	2616 C1	3383 A5	3625 B1	6464 C4	9051 B3
2185 B2	2618 C1	3384 A5	3626 B1	6471 B5	9051 B3
2189 B2	2619 A1	3385 A5	3630 B1	7103 B2	P016 C4
2192 B2	2620 C1	3386 A5	3631 B1	7105 B2	P017 C2
2196 A3	2621 B1	3387 A5	3633 A4	7125 A2	P051 B1
2201 B2	2622 A1	3388 A5	3634 A4	7126 A3	P054 A1
2202 B3	2623 B2	3390 B5	3635 C2	7200 B2	P056 A5
2211 B2	2625 A4	3391 B5	3636 B1	7210 B2	P057 A5
2212 B2	2627 C2	3394 B5	3637 C2	7233 B2	
2220 B3	3100 B2	3395 B5	3638 C2	7234 B2	
2222 A2	3103 B2	3398 B5	3997 B3	7235 C2	
2227 A4	3104 B2	3399 B5	4001 C2	7330 B5	
2230 C3	3105 B2	3404 A3	4002 B5	7335 C4	
2232 C3	3106 B2	3405 A4	4003 B4	7337 C5	
2234 C3	3107 A2	3406 B4	4005 B3	7338 C5	
2235 C3	3108 A2	3407 B4	4007 A2	7350 B2	
2238 B3	3155 A3	3410 A4	4008 B5	7380 B5	
2239 E3	3156 A2	3411 A4	4009 A3	7381 A5	
2250 B3	3157 A2	3412 A4	4011 C2	7385 A5	
2251 B3	3158 A2	3413 A4	4012 C4	7387 A5	
2255 C3	3170 B2	3414 A4	4013 A4	7400 A4	
2260 B3	3175 A2	3416 A4	4014 B4	7402 A4	
2270 B3	3195 B3	3434 A4	4015 B4	7404 A4	
2330 B4	3196 B3	3435 A4	4016 C1	7406 A4	
2340 C5	3200 B2	3436 A4	4017 A2	7408 B4	
2345 C3	3201 B2	3437 A4	4018 A2	7410 C4	
2350 B2	3202 B2	3438 A4	4019 B2	7470 C5	
2351 B2	3211 B2	3440 B3	4020 C2	7471 B5	
2380 B5	3212 B2	3441 B3	4021 B2	7472 B5	
2381 B5	3213 B3	3442 A3	4022 C5	7473 B5	
2383 B5	3220 A3	3444 B3	4024 C4	7610 C1	
2384 B5	3221 A3	3446 B3	4025 C4	7630 B1	
2385 B5	3222 A2	3448 B4	4026 B3	7755 C3	
2390 C5	3227 A3	3450 B4	4027 B4	9001 C5	
2391 A5	3228 A4	3452 B4	4028 B3	9002 B2	
2395 A5	3231 C3	3454 B4	4029 C2	9003 A2	
2397 A5	3232 C3	3460 C5	4046 A3	9004 A2	
2399 C3	3233 C2	3461 C5	4047 A5	9007 B2	
2400 A4	3234 B2	3462 B4	4048 A3	9010 C3	
2402 A3	3235 C3	3463 C4	4049 A5	9011 C3	
2404 A3	3236 C3	3464 C4	4402 C4	9012 C4	
2405 A4	3237 B2	3465 B5	4403 B4	9013 C4	
2409 A4	3238 B3	3470 C3	4404 B4	9014 A1	
2410 A4	3239 B3	3471 C3	4410 C4	9015 A4	
2413 A3	3240 B3	3472 B3	4411 C4	9016 A4	
2414 A4	3241 B1	3473 C2	4415 A3	9017 A3	
2415 A4	3242 B3	3474 B5	4417 C4	9018 A3	



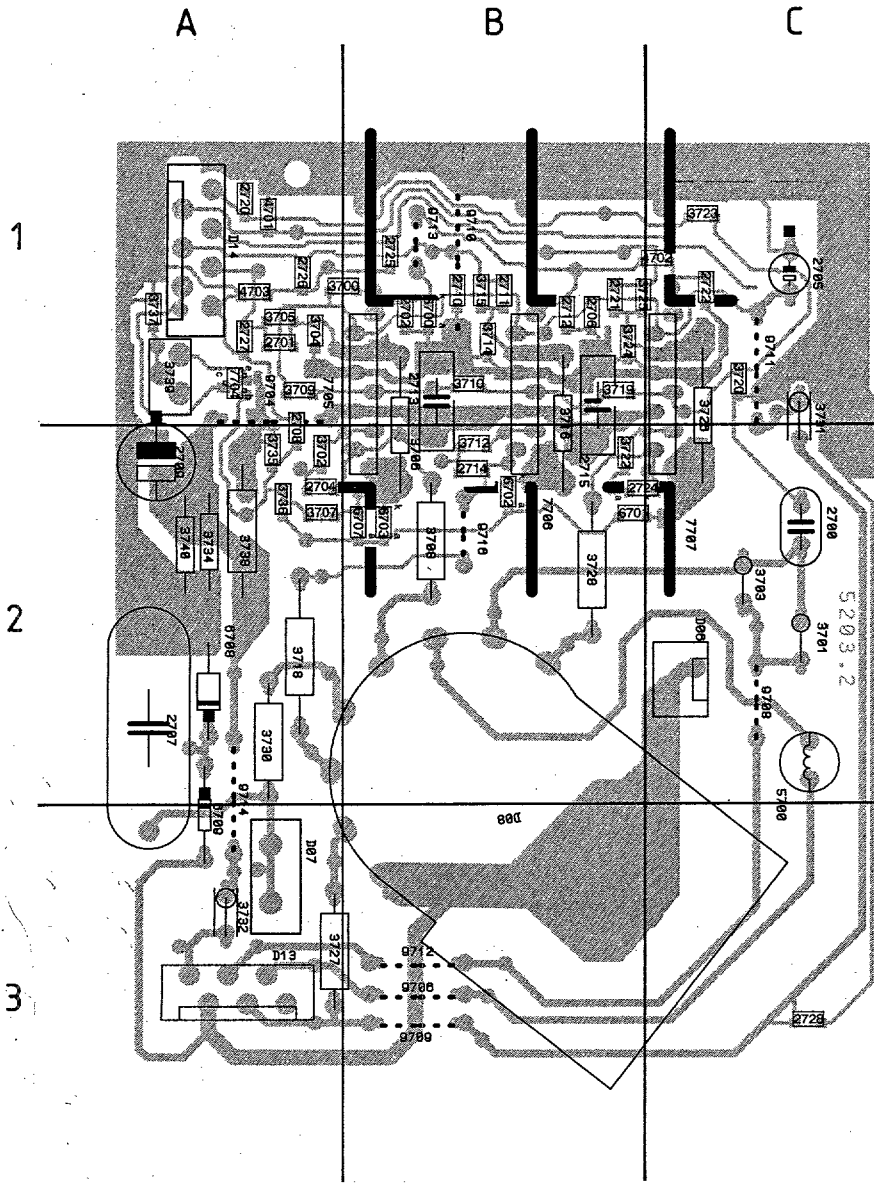


- 2700 C2
- 2701 A1
- 2702 B1
- 2704 A2
- 2705 C1
- 2706 B1
- 2707 A2
- 2708 A2
- 2709 A2
- 2710 A1
- 2711 B1
- 2712 B1
- 2713 B1
- 2714 B2
- 2715 B2
- 2720 A1
- 2721 B1
- 2722 C1
- 2724 B2
- 2725 B1
- 2726 A1
- 2727 A1
- 2728 C3
- 3700 A2
- 3701 C2
- 3702 A2
- 3703 C2
- 3704 A1
- 3705 A1
- 3706 B2
- 3707 A2
- 3708 B2
- 3709 A1
- 3710 B1
- 3712 B2
- 3714 B1
- 3715 B1
- 3716 B1
- 3718 A2
- 3719 B1
- 3720 C1
- 3722 B2
- 3723 C1
- 3724 B1
- 3725 B1
- 3726 C1
- 3727 A3
- 3728 B2
- 3730 A2
- 3731 C1
- 3732 A3
- 3734 A2
- 3735 A2
- 3736 A2
- 3737 A1
- 3738 A2
- 3739 A1
- 3740 A2
- 4701 A1
- 4702 C1
- 4703 A1
- 5700 C2
- 5700 A1
- 5701 B2
- 5702 B2
- 5703 B2
- 5707 B2
- 5708 A2
- 5709 A3
- 7704 A1

- 7705 A1
- 7706 B2
- 7707 C1
- 9704 A1
- 9706 B3
- 9708 C2
- 9709 B3
- 9710 B1
- 9711 C1
- 9712 B3
- 9713 B1
- 9714 A2
- 9716 B2
- D06 C2
- D07 A3
- D08 B3
- D13 A3
- D14 A1

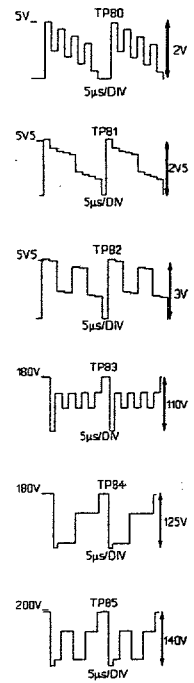


A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L  
M  
N  
O

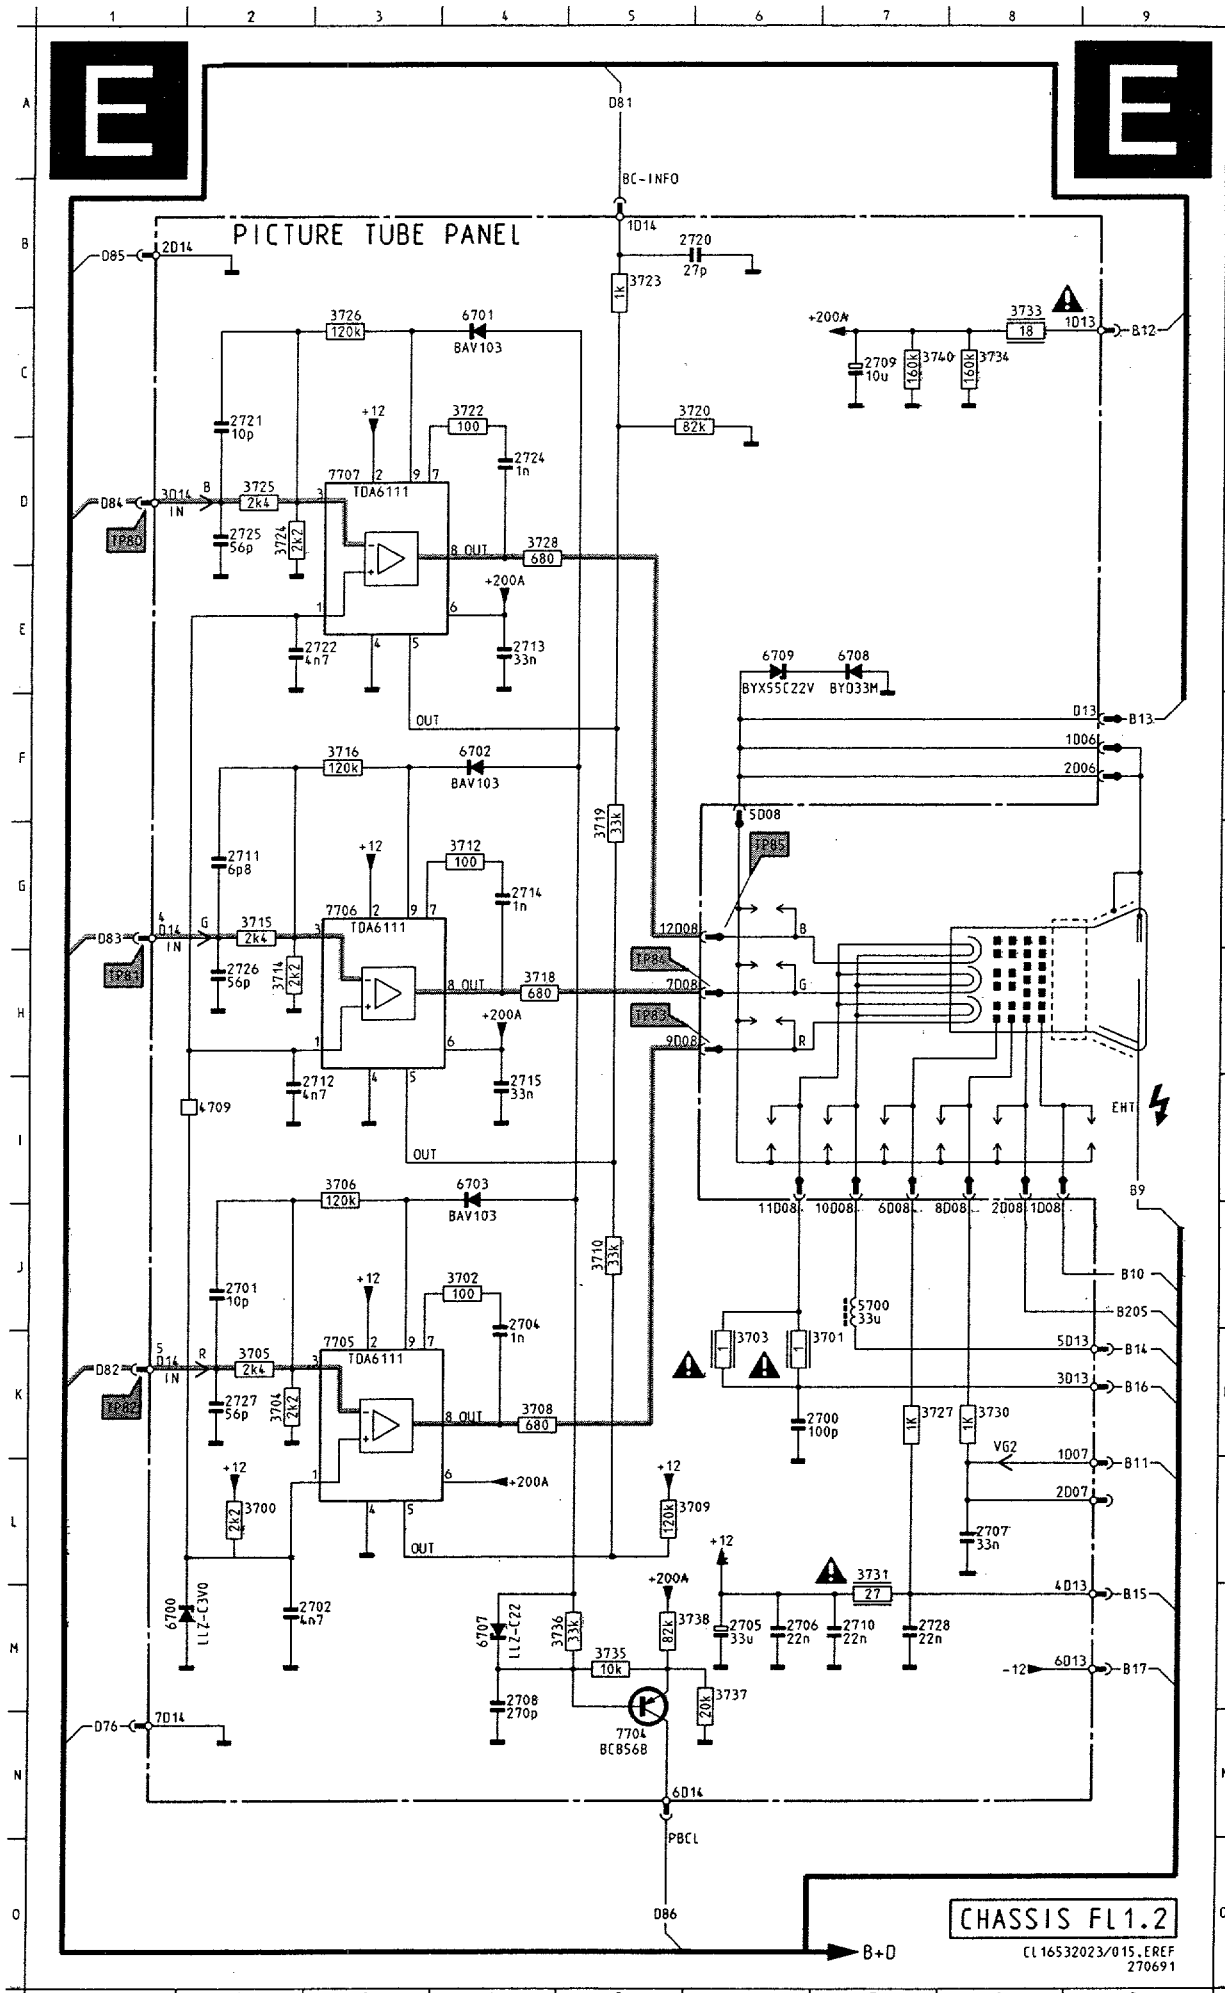

2700	K 6
2701	J 2
2702	M 2
2704	K 4
2705	M 6
2706	M 6
2707	L 8
2708	M 4
2709	C 7
2710	M 7
2711	G 2
2712	I 2
2713	E 4
2714	G 4
2715	I 4
2720	B 5
2721	C 2
2722	E 2
2724	D 4
2725	D 2
2726	H 2
2727	K 2
2728	M 7
3700	L 2
3701	K 6
3702	J 4
3703	K 6
3704	K 2
3705	K 2
3706	I 3
3708	K 4
3709	L 5
3710	J 5
3712	G 4
3714	H 2
3715	G 2
3716	F 3
3718	H 4
3719	G 5
3720	C 5
3722	C 4
3723	B 5
3724	D 2
3726	C 3
3727	K 7
3728	D 4
3730	K 8
3731	L 7
3733	C 8
3734	C 8
3735	M 5
3736	M 5
3737	M 6
3738	M 5
3740	C 7
4709	I 2
5700	J 7
6700	M 1
6701	C 4
6702	F 4
6703	I 4
6707	H 4
6708	E 7
6709	E 6
7704	N 5
7705	K 3
7706	G 3
7707	D 3



CHASSIS FL1.2  
CL 16532023/015.EREF  
270691

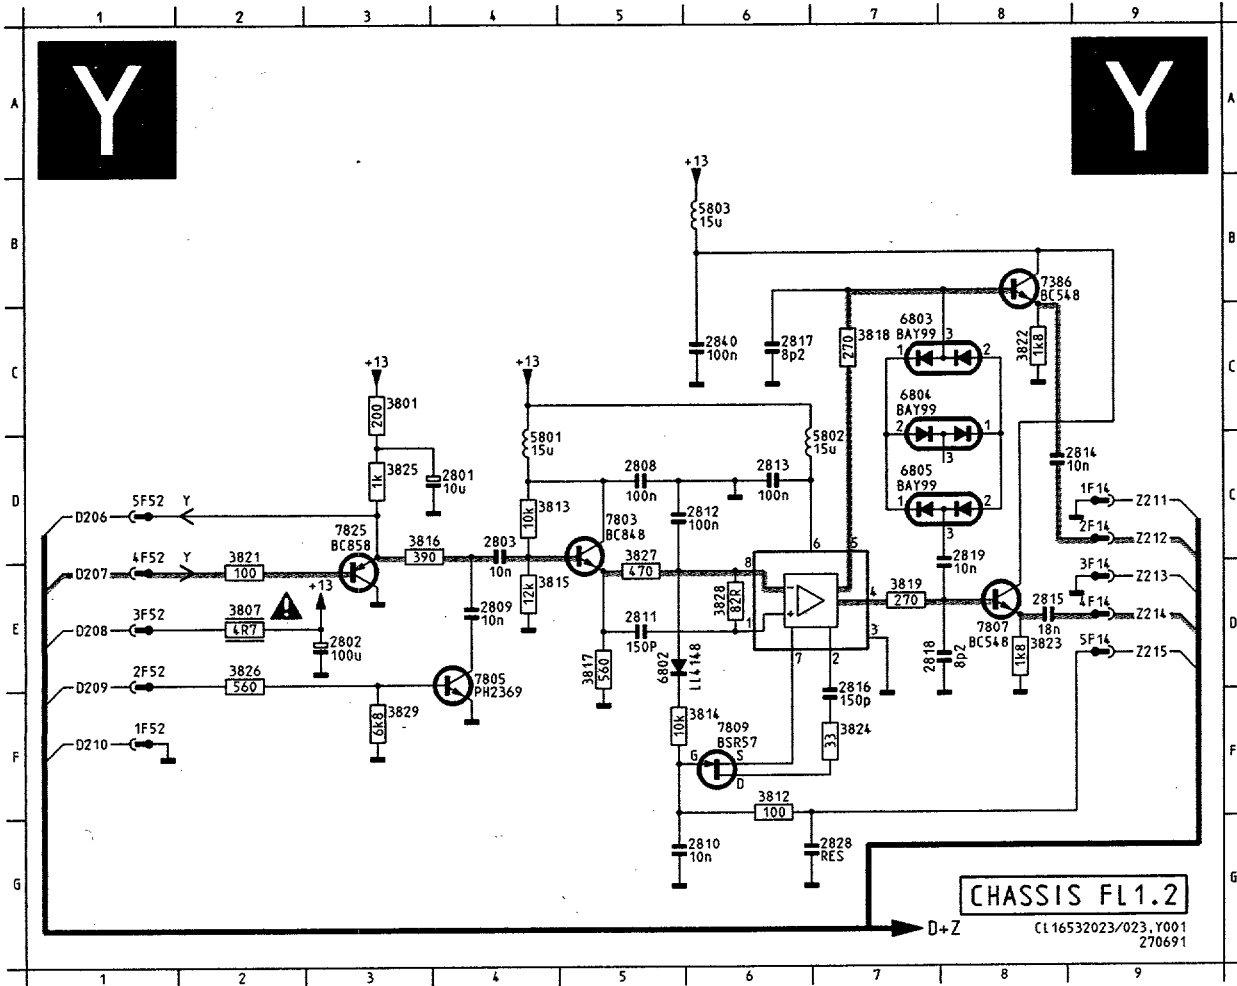


2801	D 4
2802	E 3
2803	D 4
2808	D 5
2809	E 4
2810	G 5
2811	E 5
2812	D 5
2813	D 6
2814	D 8
2815	F 8
2816	F 7
2817	C 6
2818	F 7
2819	F 8
2828	G 7
2840	C 6
3801	C 3
3807	E 2
3812	F 6
3813	D 4
3814	F 5
3815	E 4
3816	D 3
3817	E 5
3818	C 7
3819	E 7
3821	D 2
3822	C 8
3823	F 8
3824	F 7
3825	D 3
3826	E 2
3827	D 5
3828	E 6
3829	F 3
5801	D 4
5802	D 6
5803	B 5
6802	E 5
6803	C 7
6804	C 7
6805	D 7
7386	B 8
7803	D 5
7805	E 4
7807	E 8
7809	F 6
7825	D 3

SCAVEM filter panel


SCAVEM filter panel

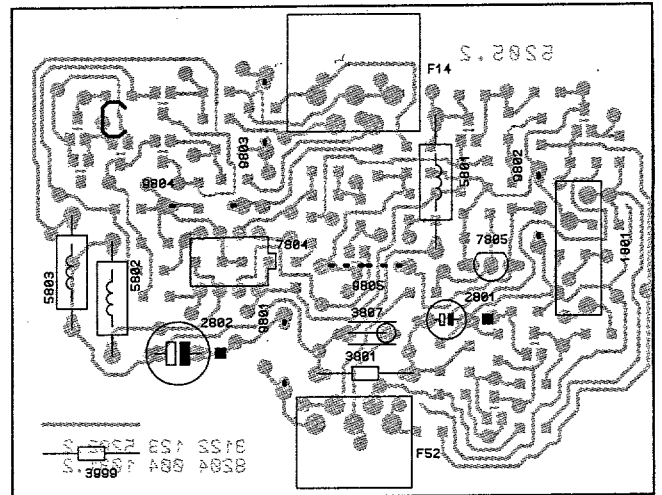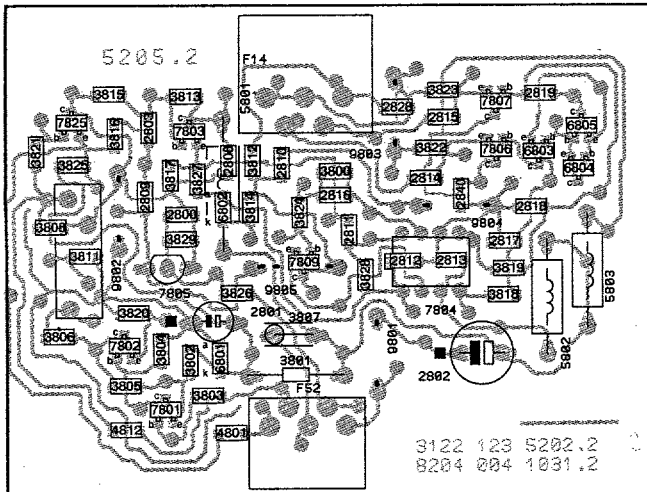

SCAVEM


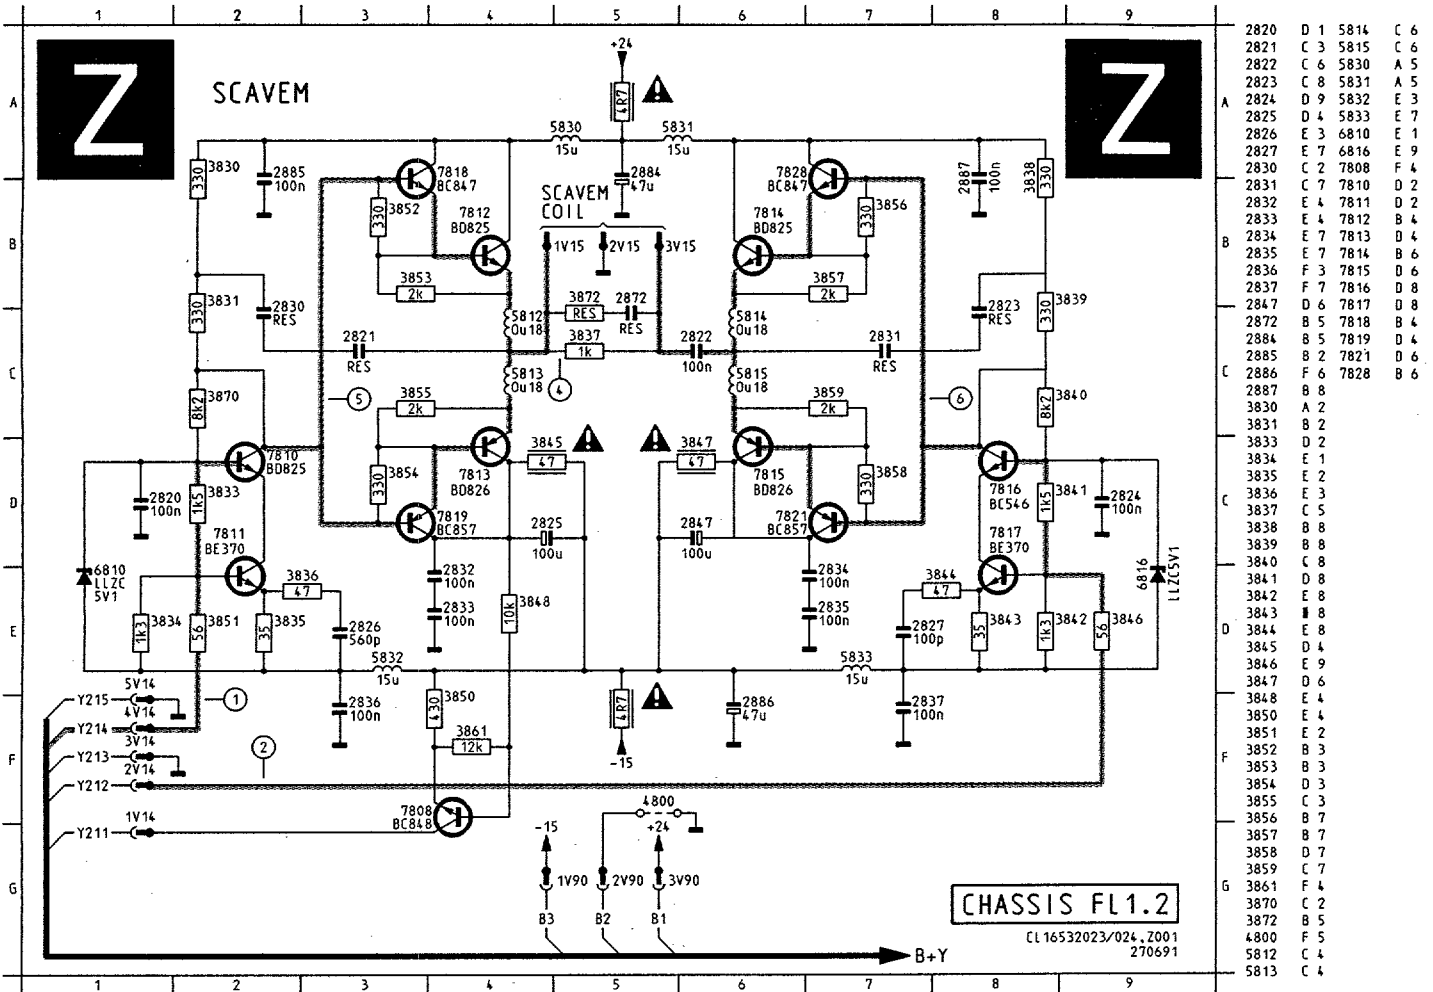



2820	D 1	5814	C 6
2821	C 3	5815	C 6
2822	C 6	5830	A 5
2823	C 8	5831	A 5
2824	D 9	5832	E 3
2825	E 4	5833	E 7
2826	E 3	6810	E 1
2827	E 7	6816	E 9
2830	C 2	7808	F 4
2831	C 7	7810	D 2
2832	C 4	7811	D 2
2833	E 4	7812	B 4
2834	E 7	7813	D 4
2835	E 7	7814	B 6
2836	F 3	7815	D 6
2837	F 7	7816	D 8
2847	D 6	7817	D 8
2872	B 5	7818	B 4
2884	B 5	7819	D 4
2885	B 2	7821	D 6
2886	F 6	7828	B 6
2887	B 8		
2887	A 2		
2831	B 2		
2833	D 2		
2834	E 1		
2835	E 2		
2836	E 3		
2837	C 5		
2838	B 8		
2839	B 8		
2840	C 8		
2841	D 8		
2842	E 8		
2843	F 8		
2844	E 8		
2845	D 4		
2846	E 9		
2847	D 6		
2848	E 4		
2850	E 4		
2851	E 2		
2852	B 3		
2853	B 3		
2854	D 3		
2855	C 3		
2856	B 7		
2857	B 7		
2858	D 7		
2859	C 7		
2861	F 4		
2870	C 2		
2872	B 5		
4800	F 5		
5812	C 4		
5813	C 4		

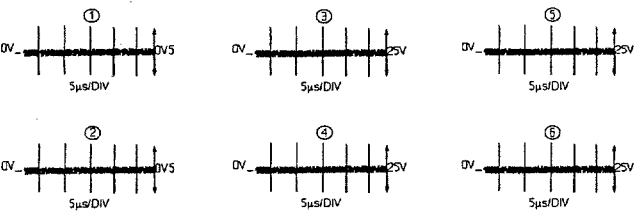


SCAVEM amplifier


SCAVEM amplifier

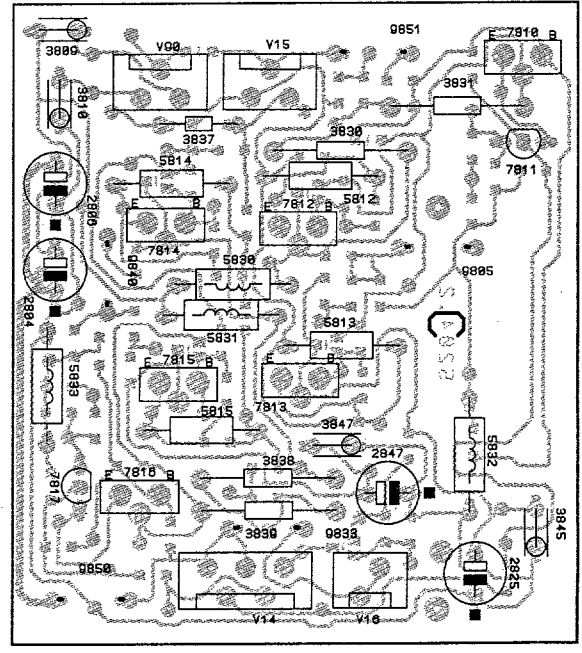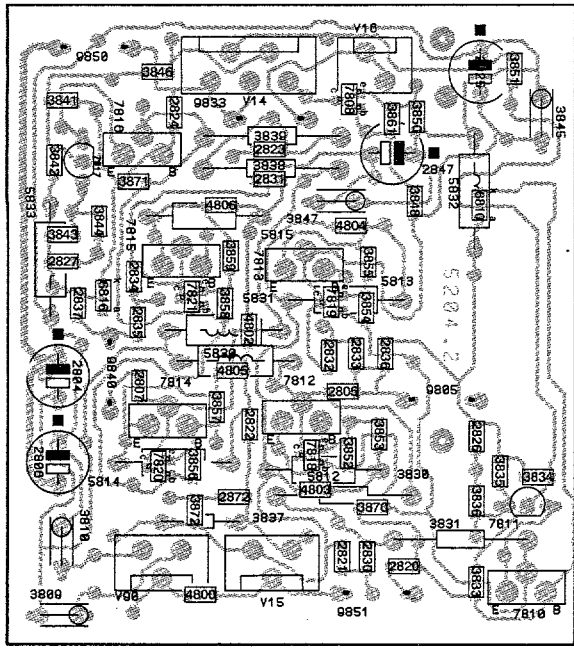

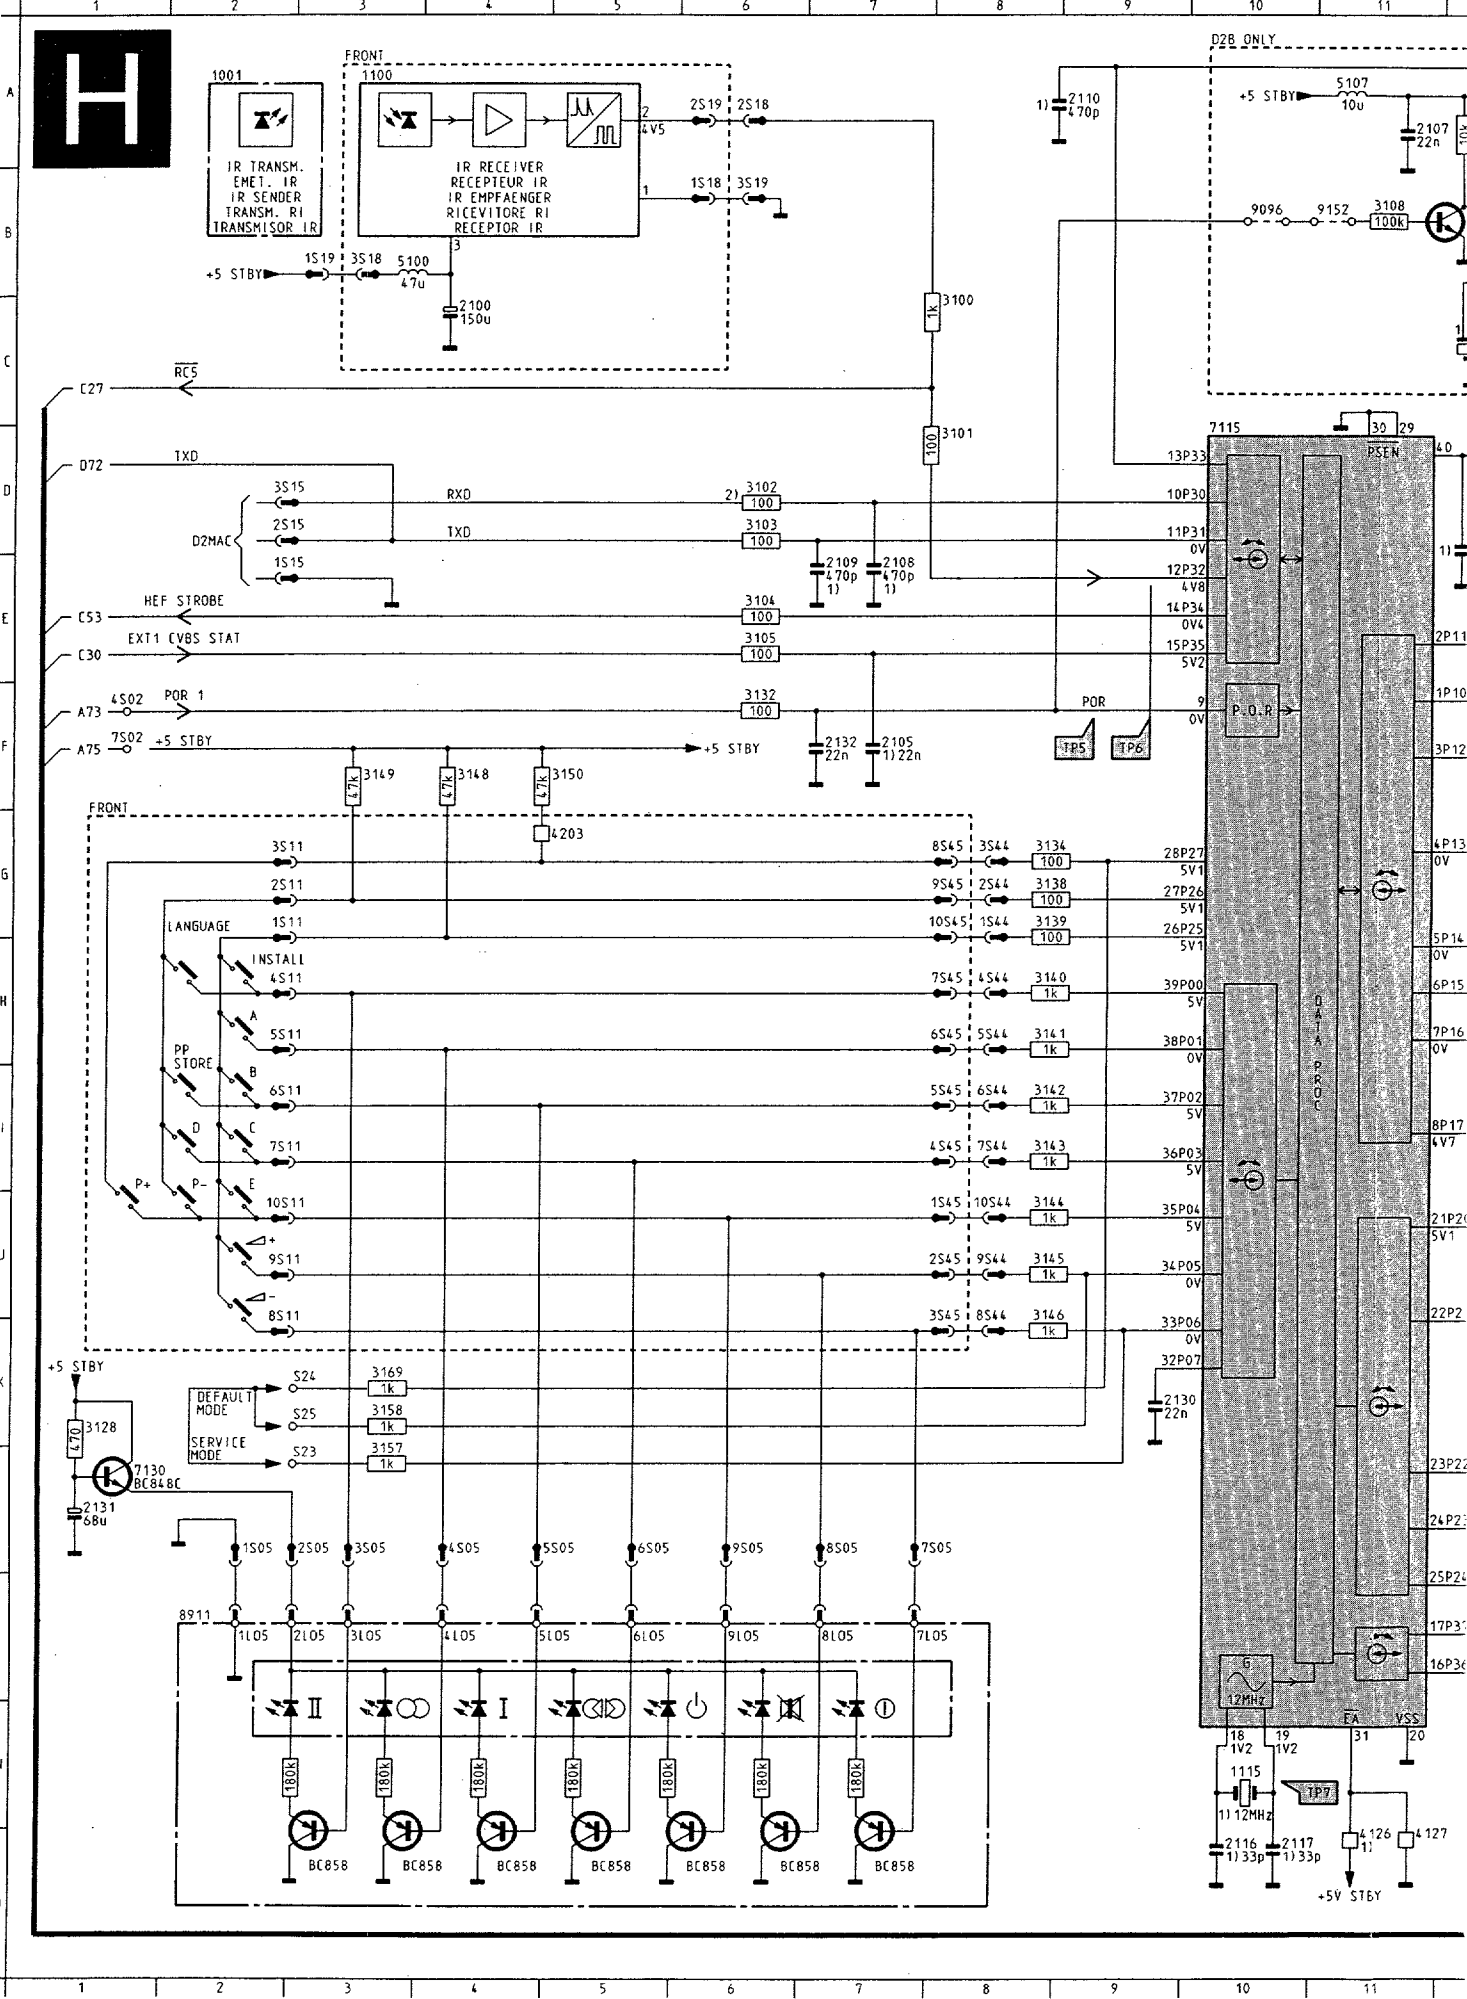

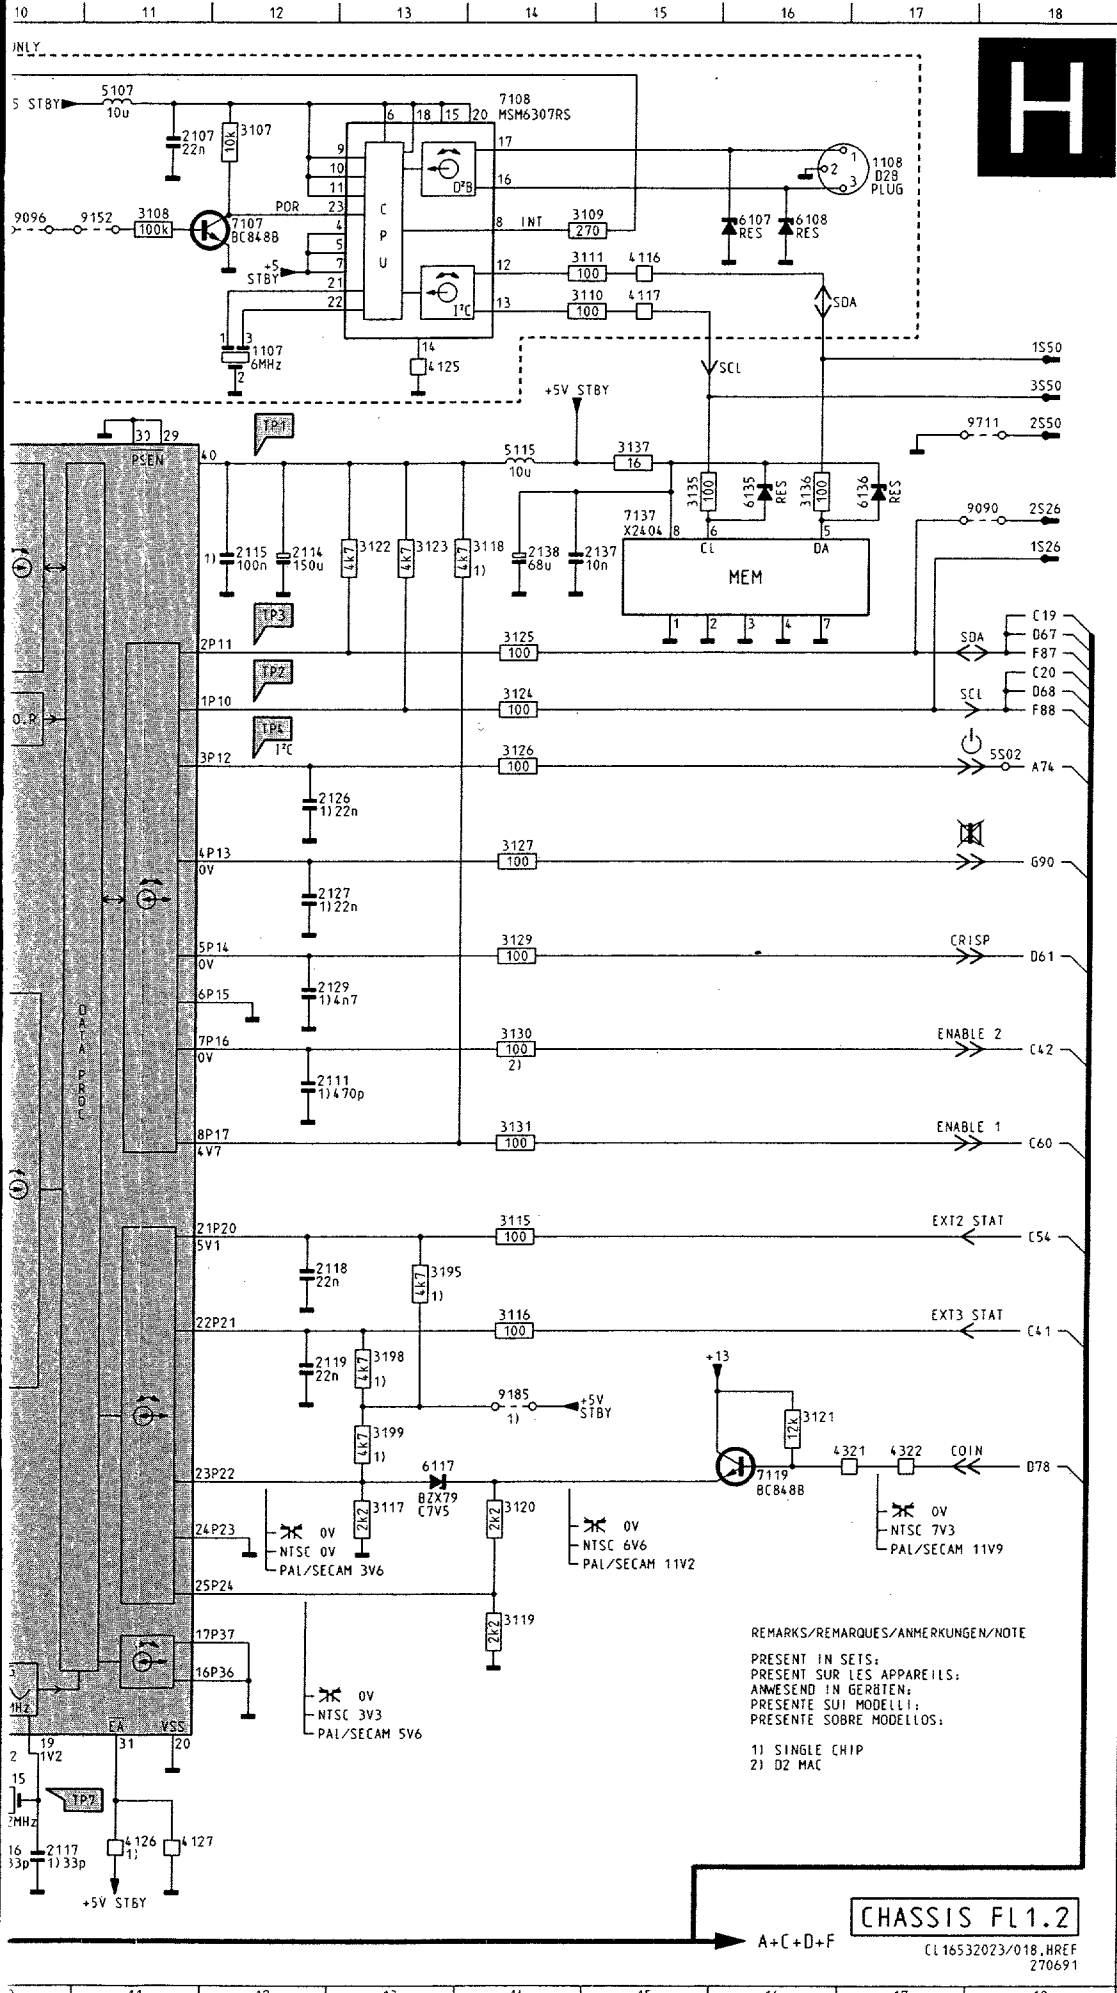

- 1001 A 2
- 1100 A 3
- 1107 C12
- 1108 A17
- 1115 N10
- 2100 C 4
- 2105 F 7
- 2107 A11
- 2108 E 7
- 2109 E 7
- 2110 A 9
- 2111 I12
- 2114 D12
- 2115 D12
- 2116 O10
- 2117 O10
- 2118 J12
- 2119 K12
- 2126 F12
- 2127 G12
- 2129 H12
- 2130 K 9
- 2131 L 1
- 2132 F 7
- 2137 D14
- 2138 D14
- 3100 B 8
- 3101 D 8
- 3102 D 6
- 3103 D 6
- 3104 E 6
- 3105 E 6
- 3107 A12
- 3108 B11
- 3109 B14
- 3110 B14
- 3111 B14
- 3116 J14
- 3117 L13
- 3118 D14
- 3119 H14
- 3120 L14
- 3121 K16
- 3122 D13
- 3123 D13
- 3124 F14
- 3125 E14
- 3126 F14
- 3127 G14
- 3128 K 1
- 3129 H14
- 3130 H14
- 3131 I14
- 3132 F 6
- 3134 G 8
- 3135 D15
- 3136 D16
- 3137 D15
- 3138 G 8
- 3139 G 8
- 3140 H 8
- 3141 H 8
- 3142 I 8
- 3143 I 8
- 3144 J 8
- 3145 J 8
- 3146 K 8
- 3148 F 4
- 3149 F 3
- 3150 F 5
- 3157 L 3
- 3158 K 3
- 3159 J13
- 3198 K13
- 3199 K13
- 4116 B15
- 4117 B15
- 4125 C13
- 4126 O11
- 4127 O11
- 4203 G 5
- 4321 L17
- 4322 L17
- 5100 B 3
- 5107 A11
- 5115 D14
- 6107 B16
- 6108 B16
- 6117 L13
- 6135 D16
- 6136 D17
- 7107 B12
- 7108 A14
- 7119 L16
- 7130 L 1
- 7137 D15
- 8911 M 2
- 9090 D18
- 9096 B10
- 9152 B11
- 9185 K14
- 9711 C18

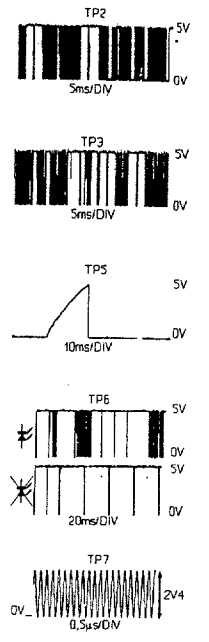



REMARKS/REMARQUES/ANMERKUNGEN/NOTE  
 PRESENT IN SETS;  
 PRESENT SUR LES APPAREILS;  
 ANWESSENT IN GERBIEN;  
 PRESENTE SUI MODELLI;  
 PRESENTE SOBRE MODELLOS;  
 1) SINGLE CHIP  
 2) D2 MAC

**Control Panel**  
**4822 212 23791**

**CHASSIS FL1.2**

CL 16532023/018, HRF 270691

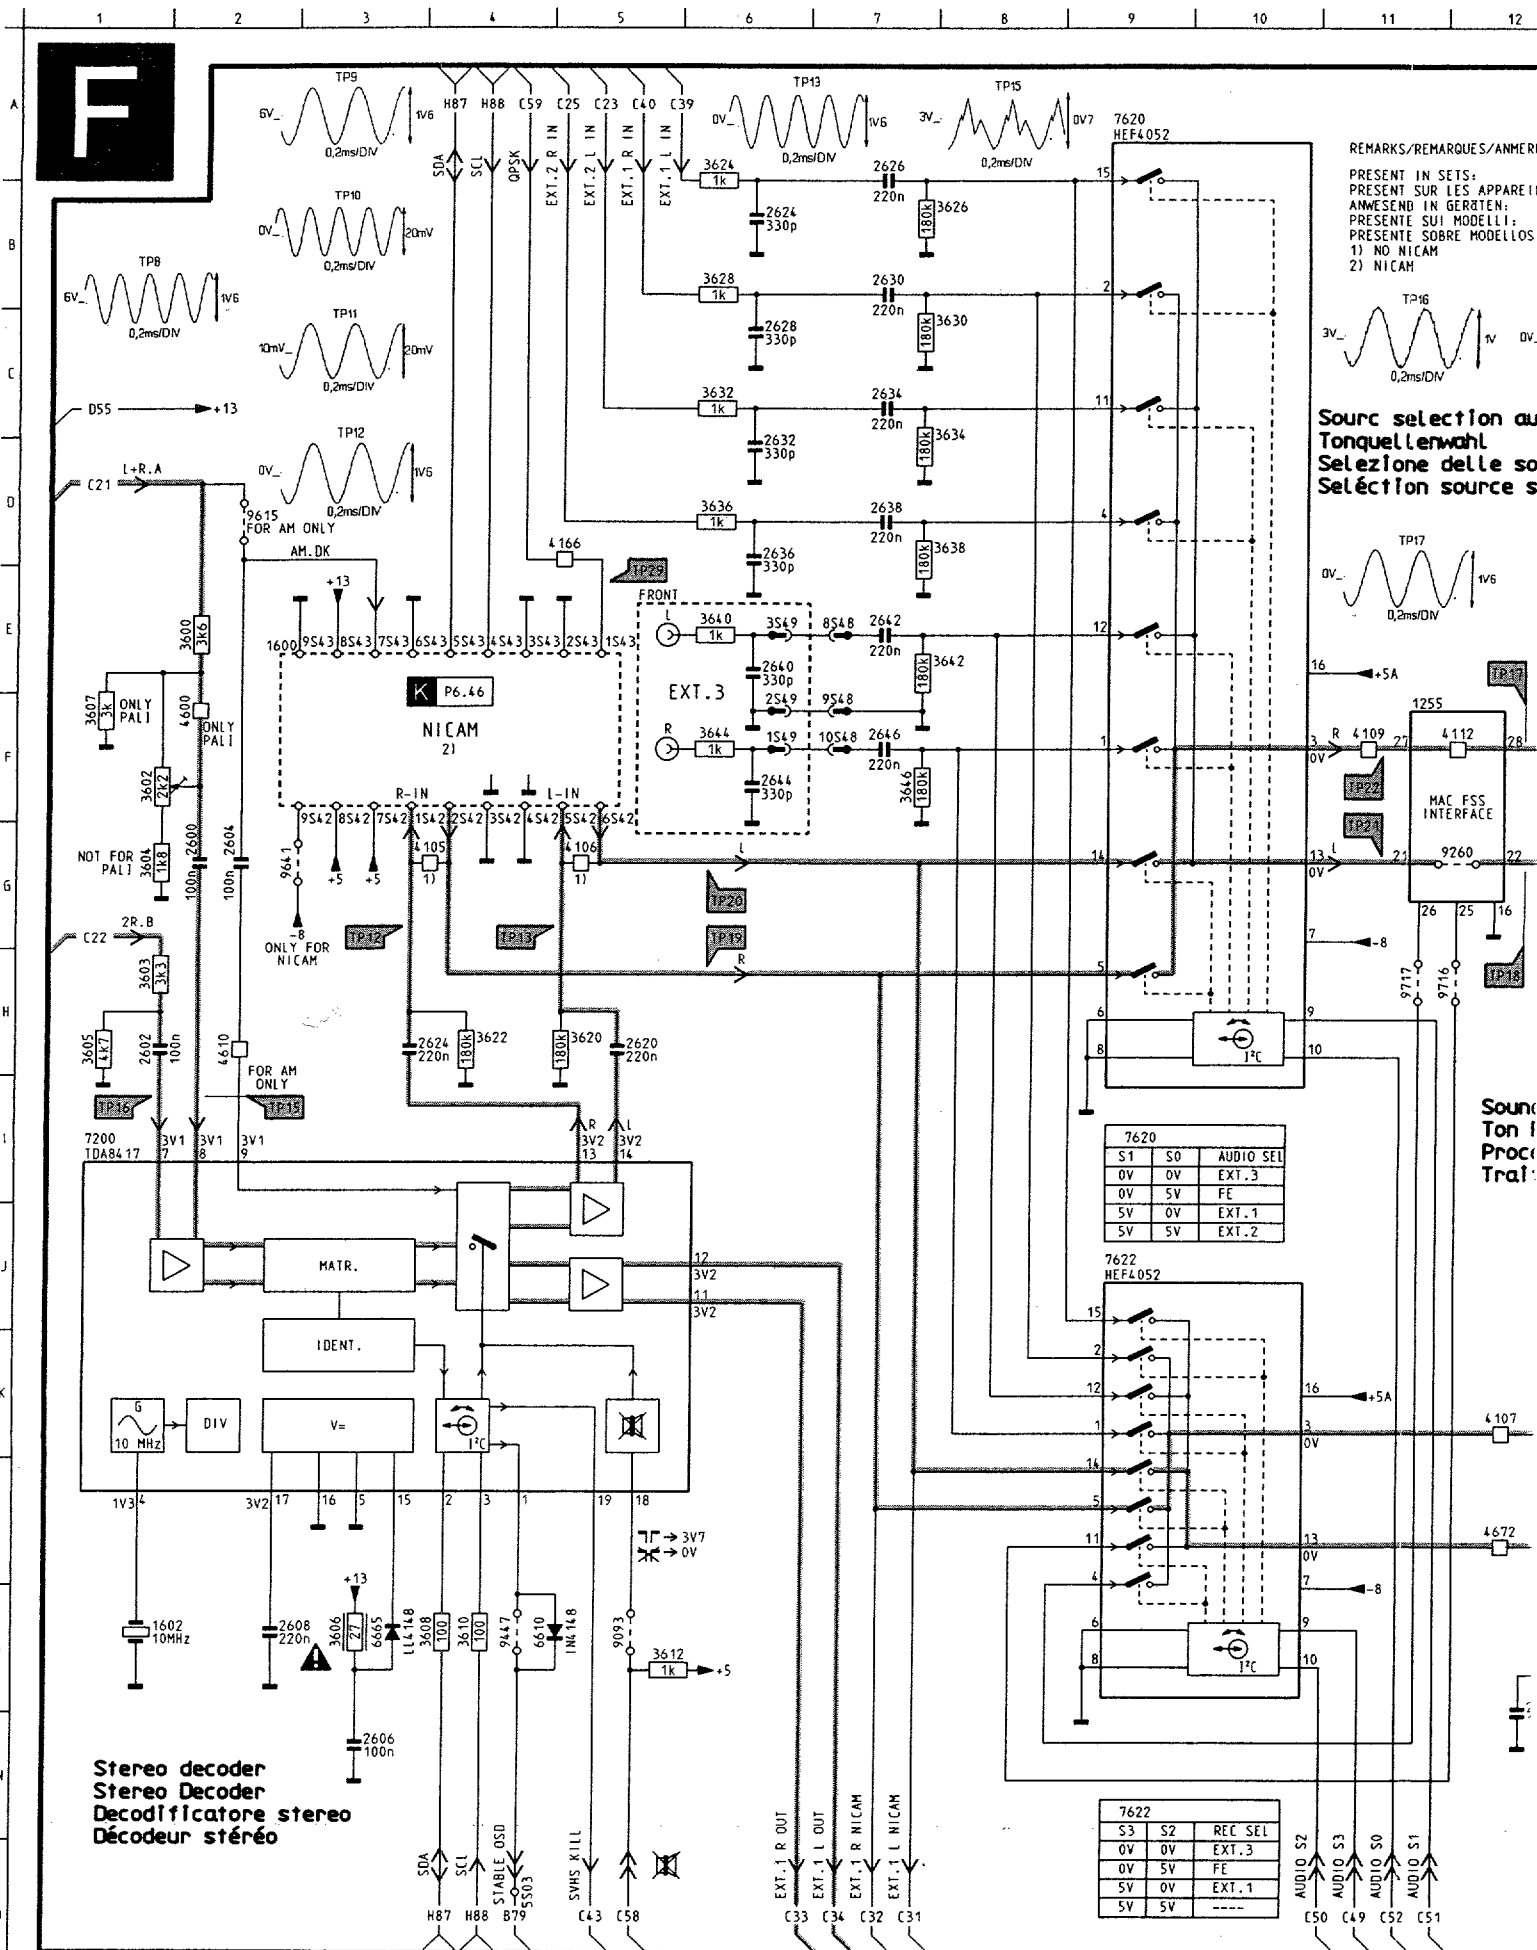


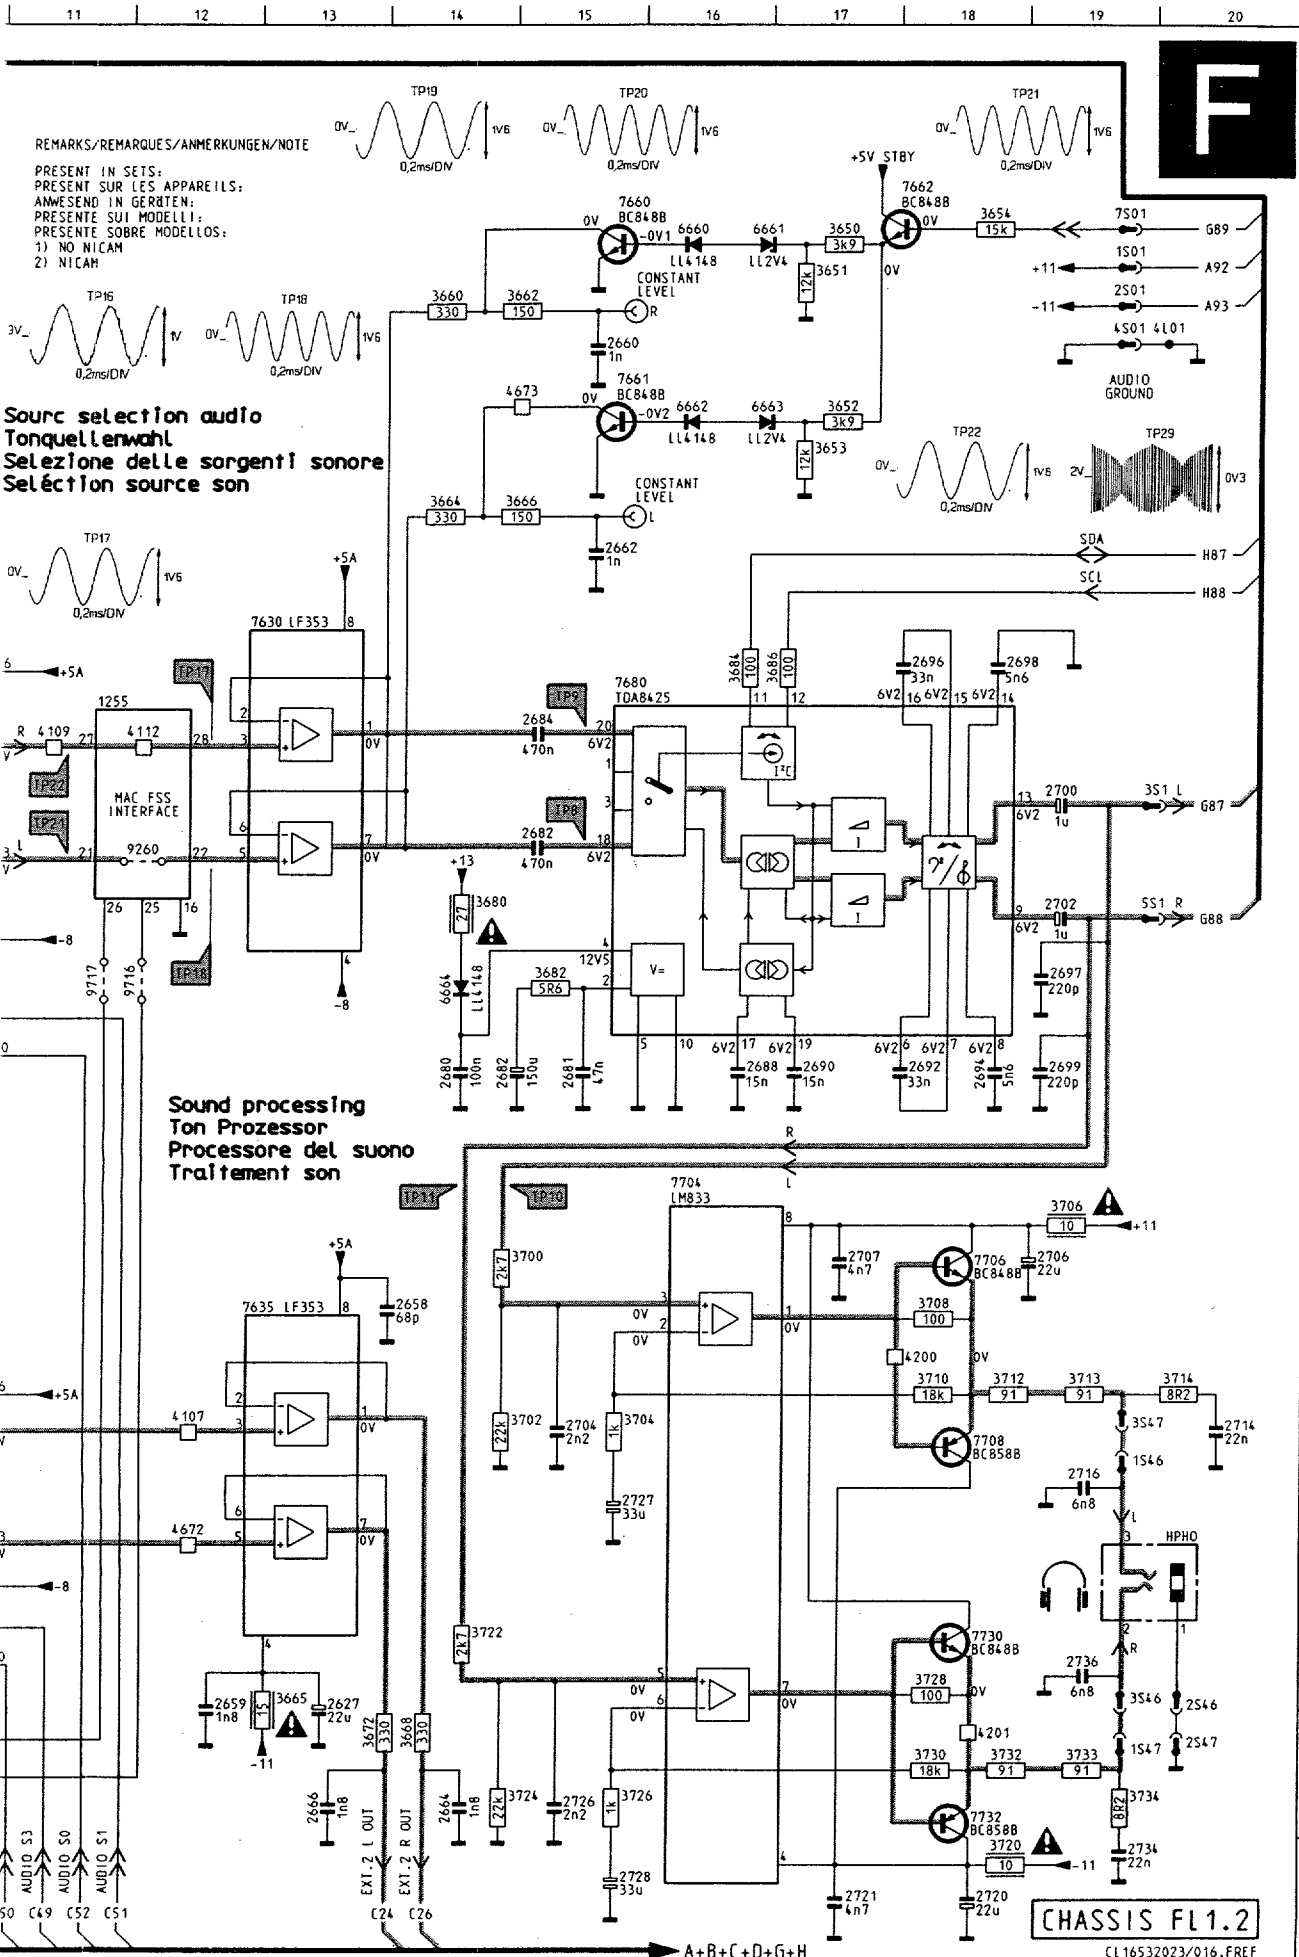

1255	F11	4107	K12
1600	E 2	4109	F11
1602	M 1	4112	F12
2600	G 2	4166	D 5
2602	H 1	4200	K18
2604	G 2	4201	N18
2606	N 3	4600	F 2
2608	M 2	4610	H 2
2620	H 5	4672	L12
2624	B 6	4673	C15
2624	H 3	6610	M 5
2626	A 7	6660	B16
2627	H13	6661	B16
2628	C 6	6662	C16
2630	B 7	6663	C16
2632	D 6	6664	H14
2634	C 7	6665	M 3
2636	D 6	7200	I 1
2638	D 7	7620	A 9
2640	E 6	7622	J 9
2642	E 7	7630	E12
2644	F 6	7635	J12
2646	F 7	7660	B15
2658	J14	7661	C15
2659	M12	7662	B17
2660	C15	7680	E15
2662	D15	7704	I16
2664	N14	7706	J18
2666	N13	7708	K18
2680	H14	7730	M18
2681	H15	7732	M18
2682	G15	9093	M 5
2682	H14	9260	G12
2684	F15	9417	M 4
2688	H16	9615	D 2
2690	H17	9641	G 2
2692	H18	9716	H12
2694	H18	9717	H11
2696	E18		
2697	H19		
2698	E18		
2699	H19		
2700	F19		
2702	G19		
2704	K15		
2706	J19		
2707	J17		
2714	K20		
2716	L19		
2720	O18		
2721	O17		
2726	N15		
2727	L15		
2728	O15		
2734	O19		
2736	M19		
3600	E 2		
3602	F 1		
3603	H 1		
3604	G 1		
3605	H 1		
3606	M 3		
3607	F 1		
3608	M 4		
3610	M 4		
3612	M 5		
3620	H 5		
3622	H 4		
3624	A 6		
3626	B 7		
3628	B 6		
3630	C 7		
3632	C 6		
3634	C 7		
3636	D 6		
3638	D 7		
3640	E 6		
3642	E 7		
3644	F 6		
3646	F 7		
3650	B17		
3651	B17		
3652	C17		
3653	D17		
3654	B18		
3660	B14		
3662	B15		
3664	D14		
3665	M13		
3666	D15		
3668	N14		
3672	N13		
3680	G14		
3682	H15		
3684	E16		
3686	E17		
3700	J14		
3702	K14		
3704	K15		
3706	J19		
3708	J18		
3710	K18		
3712	K18		
3713	K19		
3714	K20		
3720	O18		
3722	M14		
3724	N14		
3726	N15		
3728	M18		
3730	N18		
3732	N18		
3733	N19		
3734	N19		
4105	G 4		
4106	G 5		




CHASSIS FL1.2  
 CL16532023/016, FREF  
 270691



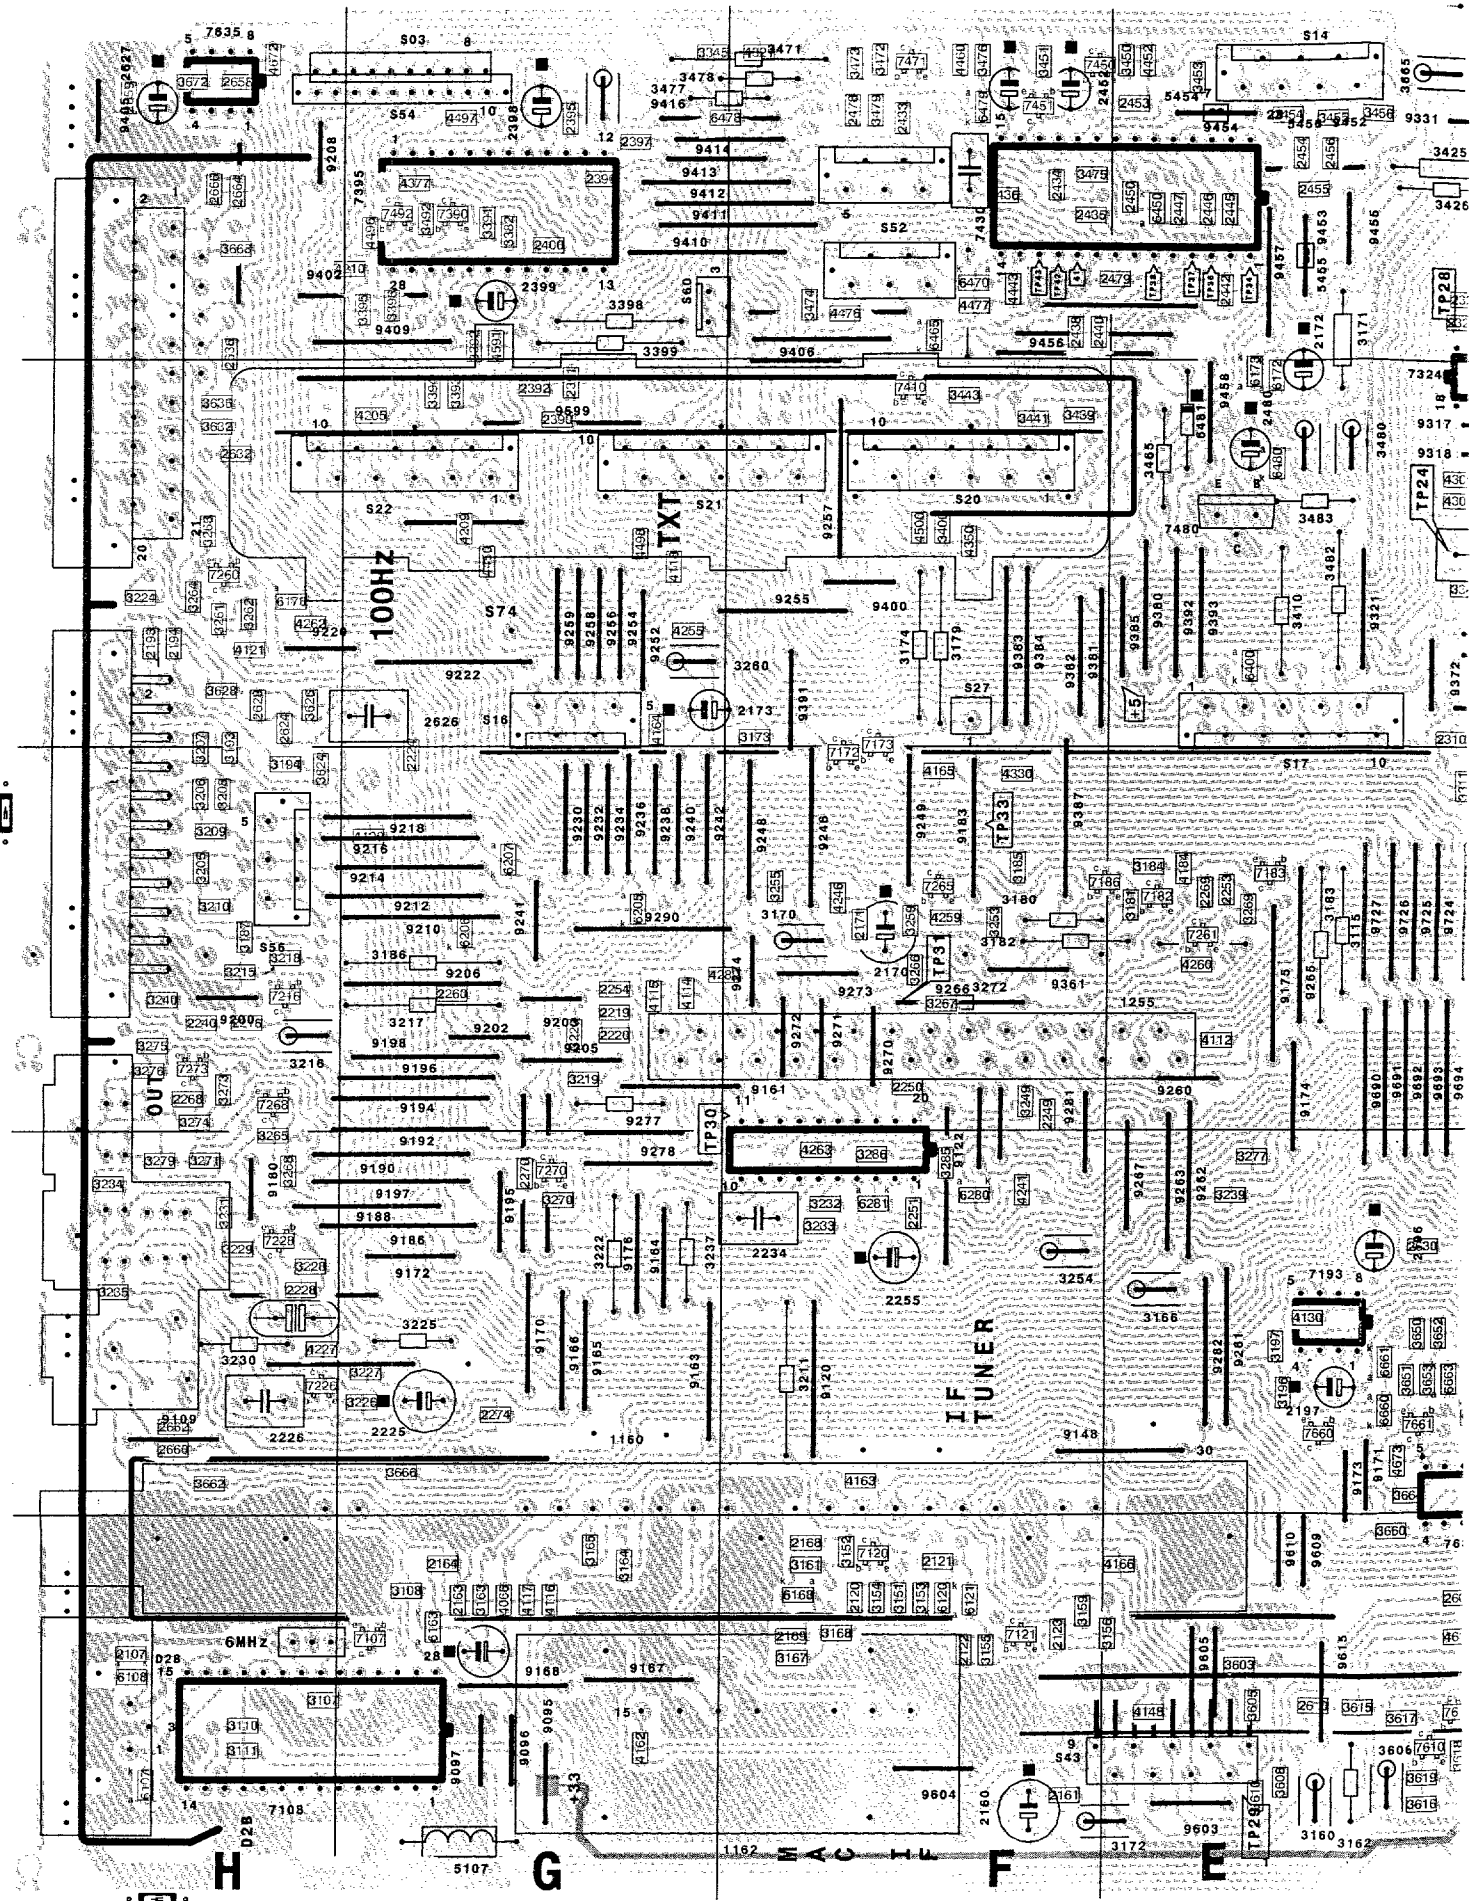






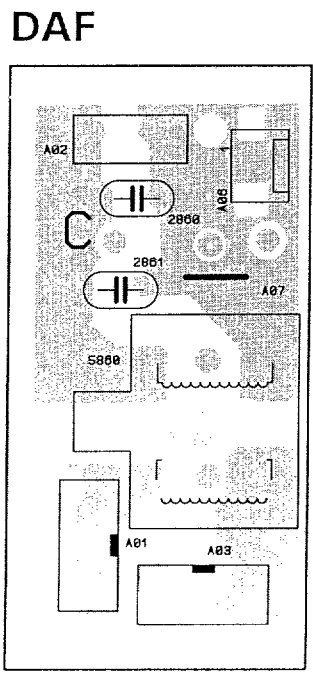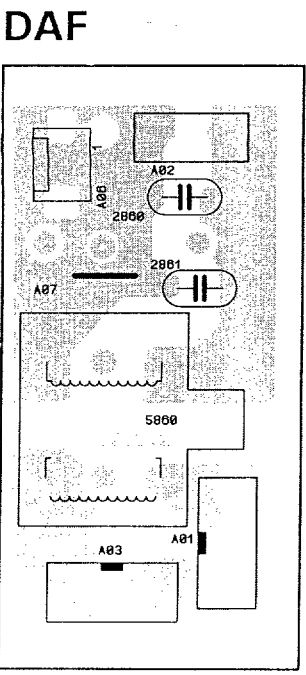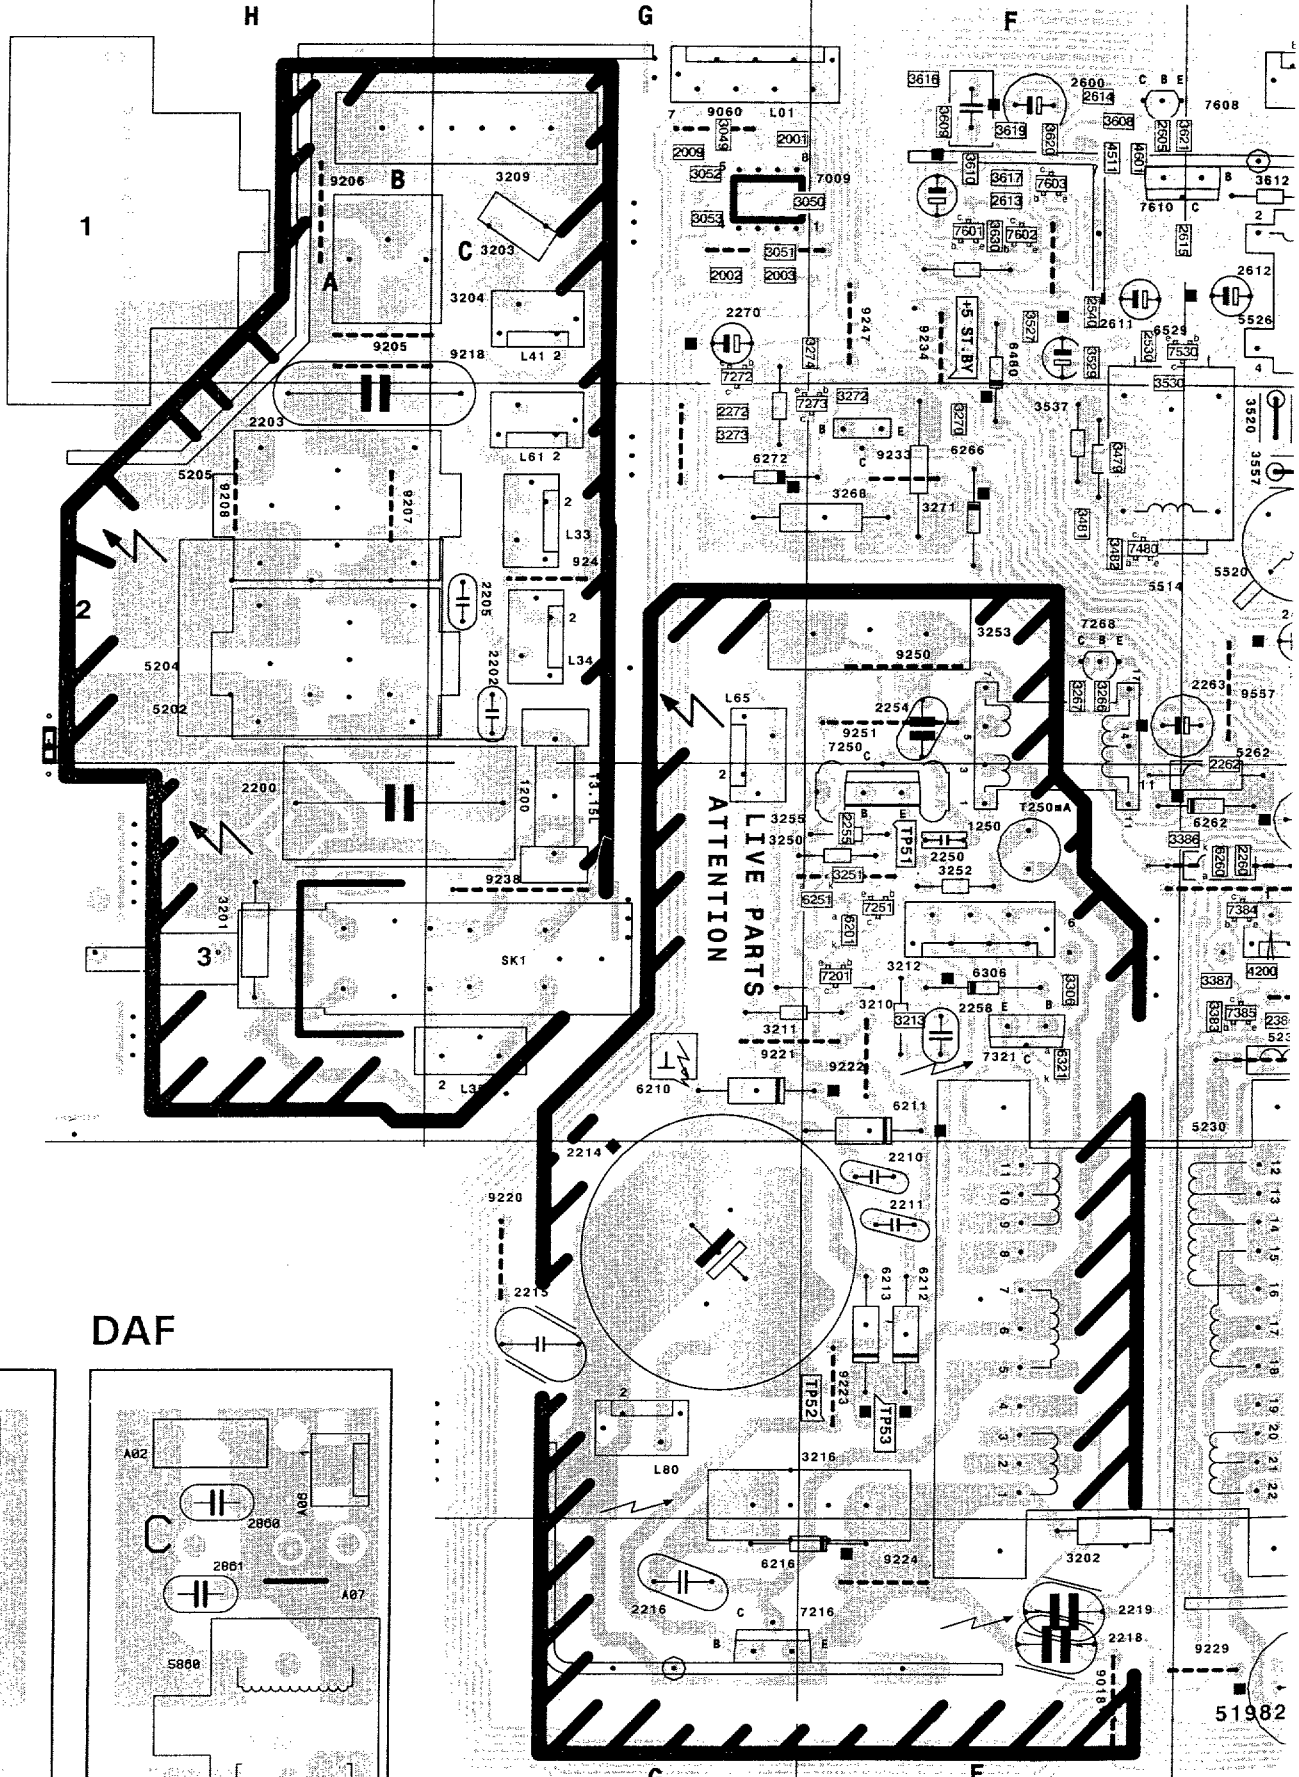




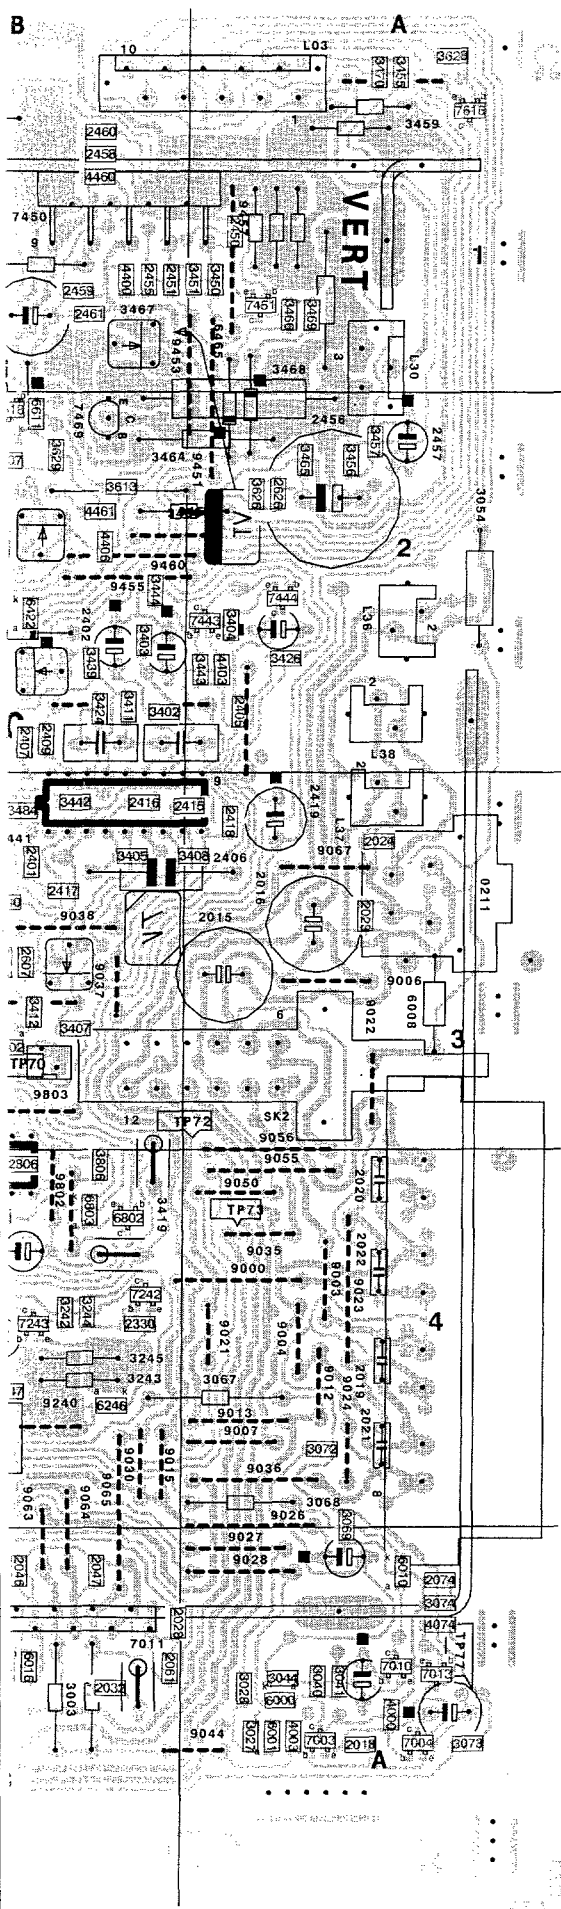


0207 A4	2417 B3	3054 A2	3470 A1	4511 F1	7009 G1	9206 H1
0211 A3	2418 A3	3060 B5	3473 B1	4512 D4	7010 A5	9207 H2
1200 G3	2419 A3	3065 C4	3479 F2	4601 F1	7011 B5	9208 H2
1240 C4	2450 A1	3066 C5	3480 B1	4802 B4	7012 D4	9216 G2
1250 F3	2451 B1	3067 A4	3481 F2	4803 B3	7013 A5	9217 G2
2001 G1	2452 B1	3068 A4	3482 F2	4804 B3	7201 F3	9218 H1
2002 G1	2455 B1	3069 A5	3484 B3	5202 H2	7216 G5	9219 E3
2003 G1	2456 A2	3072 A4	3485 E2	5204 H2	7241 B4	9220 G4
2007 B5	2457 A2	3073 A5	3500 B2	5205 H2	7242 B4	9221 G3
2008 B5	2458 B1	3074 A5	3501 C2	5210 D2	7243 B4	9222 F4
2009 G1	2459 B1	3201 H3	3502 B1	5230 F4	7246 E1	9223 F4
2011 D5	2460 B1	3202 F5	3503 B2	5231 E5	7246 E1	9224 F5
2012 C5	2461 B1	3203 G1	3504 D1	5233 E4	7250 F3	9225 E3
2013 C5	2480 E2	3204 G1	3505 C3	5235 E4	7251 F3	9228 E4
2015 A3	2501 B2	3209 G1	3506 C1	5237 E3	7258 F2	9229 E5
2016 A3	2502 B2	3210 F3	3507 D1	5241 C4	7270 F2	9230 F3
2017 A5	2503 B2	3211 G3	3508 C2	5255 F3	7272 G1	9231 E5
2018 A5	2504 C1	3212 G3	3509 C2	5260 E3	7273 F2	9232 E4
2019 A4	2507 D1	3213 F3	3510 D1	5262 E3	7380 E3	9233 F2
2020 A4	2509 D2	3214 E5	3511 D2	5381 E3	7381 E3	9234 F1
2021 A4	2510 D2	3215 E5	3512 D2	5503 B1	7384 E3	9235 E4
2022 A4	2511 C2	3216 F4	3515 C3	5505 C1	7385 E3	9238 G3
2023 A3	2512 C3	3239 D3	3514 F2	5506 C1	7400 B3	9241 G3
2024 A3	2513 C2	3240 D3	3515 C2	5507 D1	7401 B4	9242 G3
2026 B5	2517 C3	3241 B4	3516 C2	5510 D1	7402 C3	9243 E3
2027 C5	2518 C3	3242 B4	3517 C2	5511 D3	7417 B3	9243 E3
2028 B5	2519 E2	3243 B4	3518 D2	5514 F2	7443 A2	9246 E1
2029 B5	2520 E2	3244 B4	3519 E2	5520 E2	7444 A2	9247 F1
2031 C5	2521 D1	3254 B4	3520 E2	5521 E1	7450 B1	9250 F2
2032 B5	2522 D1	3246 E1	3521 E2	5524 D2	7451 A1	9251 F2
2033 D5	2523 C1	3247 B4	3523 D1	5525 D3	7469 B2	9400 D3
2035 C5	2524 D1	3248 B4	3524 D2	5526 E1	7480 F2	9451 A1
2038 D4	2525 E2	3249 F3	3525 E2	5527 C1	7481 E2	9452 B2
2040 D5	2526 E2	3250 F3	3528 D3	5534 D3	7501 B2	9454 C3
2041 D5	2527 D1	3251 F3	3529 F1	5643 D4	7506 D1	9455 B2
2042 C5	2529 F1	3252 F3	3530 F1	5555 D3	7512 C3	9456 B2
2043 C5	2530 F1	3253 F2	3531 B3	6000 A5	7530 F1	9457 A1
2044 E5	2531 D3	3255 F3	3532 C3	6001 A5	7540 C4	9458 A1
2045 D5	2533 D3	3266 F2	3533 C3	6008 A3	7541 C4	9460 B2
2046 B5	2534 D3	3267 F2	3534 D3	6010 A5	7542 C4	9461 B4
2047 B5	2535 C4	3268 F2	3535 D3	6012 D5	7543 D2	9462 C4
2050 C5	2536 C4	3270 F2	3536 D3	6014 C5	7547 D3	9463 B3
2051 C5	2537 D4	3271 F2	3537 F2	6016 B5	7550 D3	9464 C4
2052 D5	2540 F1	3272 F2	3538 D3	6020 A4	7551 D4	9468 B3
2053 D5	2541 C4	3273 G2	3539 C3	6021 D4	7552 C4	9471 B2
2056 C5	2542 C4	3274 G1	3540 C4	6201 F3	7601 F1	9472 A2
2057 C5	2543 C4	3275 G2	3541 C4	6210 G3	7602 F1	9500 D2
2058 D5	2545 C3	3298 F5	3542 C4	6211 F3	7603 F1	9501 D2
2059 E5	2546 D2	3299 F5	3543 C4	6212 F4	7608 F1	9502 D2
2060 B5	2547 C2	3306 F3	3544 C4	6213 F4	7610 E1	9508 B2
2061 B5	2551 C4	3357 E2	3545 E2	6216 F5	7618 B2	9511 C2
2065 C4	2600 F1	3376 E3	3546 C4	6230 E4	7801 B3	9520 E2
2066 D5	2601 B2	3380 E3	3550 C4	6232 E4	7802 B4	9521 D1
2070 A5	2604 B2	3381 E3	3553 E2	6235 D3	9000 A4	9529 D3
2071 A5	2605 F1	3382 E3	3556 C1	6237 E3	9001 C5	9530 B2
2072 D4	2606 C3	3383 E3	3558 C2	6238 E3	9003 A4	9533 C2
2073 D4	2607 B3	3384 E3	3561 C4	6246 B4	9004 A4	9534 C2
2074 A5	2609 F1	3385 E2	3562 D4	6251 F3	9007 A4	9535 C3
2200 H3	2610 F1	3386 E3	3573 D1	6260 E3	9008 B5	9537 C3
2202 G2	2611 F1	3387 E3	3601 C3	6262 E3	9010 C5	9538 D3
2203 H2	2612 E1	3402 A2	3602 B2	6266 F2	9012 A4	9539 D3
2205 G2	2613 F1	3403 B2	3603 B2	6272 G2	9013 A4	9540 D4
2210 F4	2614 F1	3404 A2	3604 B2	6280 C4	9015 B4	9541 D2
2211 F4	2615 F1	3405 B3	3605 C2	6321 F3	9017 C5	9542 C2
2214 G4	2626 A2	3406 B3	3606 B2	6352 E3	9028 F5	9543 C2
2215 G4	2632 B2	3407 B3	3607 B2	6353 E3	9020 D5	9544 D1
2216 G5	2633 B3	3408 B3	3608 F1	6372 E3	9021 A4	9545 C1
2217 F3	2801 B4	3409 B3	3609 F1	6373 E3	9022 A3	9547 D1
2218 F6	3000 D4	3410 B3	3610 F1	6375 E3	9023 A4	9549 E1
2219 F5	3001 D5	3411 B2	3612 E1	6376 E3	9024 A4	9552 F1
2221 E4	3002 B5	3412 B2	3613 B2	6402 B3	9026 A4	9557 E2
2222 E5	3003 B5	3413 B3	3615 F1	6403 C3	9027 A5	9614 E2
2223 E4	3004 C5	3414 B3	3616 F1	6404 C3	9028 A5	9615 B2
2224 E5	3005 D5	3415 B3	3617 F1	6417 B3	9029 B5	9602 B4
2225 D3	3006 C5	3416 B3	3618 B2	6422 B2	9030 B4	9603 B3
2226 D4	3008 C5	3417 B3	3619 F1	6441 B3	9031 C4	
2227 E3	3009 C5	3418 B3	3620 F1	6451 B1	9032 C5	L01 F1
2228 D4	3011 C5	3419 B4	3621 F1	6453 B1	9034 C5	L02 E1
2229 B4	3012 C5	3421 B3	3623 E1	6480 F1	9035 A4	L03 A1
2250 F3	3013 D4	3423 B2	3624 E1	6506 D1	9036 A4	L06 C2
2254 F2	3014 D4	3424 B2	3626 A2	6515 C3	9037 B3	L13 C4
2255 F3	3016 B5	3426 A2	3627 B4	6516 C3	9038 B3	L27 B3
2258 F3	3019 B5	3428 C3	3630 F1	6517 C3	9039 B3	L30 A1
2260 E3	3020 B5	3429 B3	3632 C3	6519 E2	9041 C4	L32 D3
2261 E3	3021 B5	3430 B3	3633 C3	6520 E2	9042 C4	L33 G2
2262 E3	3022 B5	3437 B1	3801 B4	6527 C1	9044 D5	L34 G2
2263 E2	3023 C5	3438 B3	3802 B4	6529 F1	9044 A5	L35 G3
2270 G1	3024 C5	3439 B2	3804 B4	6534 D3	9045 D4	L36 A2
2272 G2	3026 D5	3440 B3	3807 B3	6536 C3	9046 D4	L37 A3
2330 B4	3027 A5	3442 B3	3809 B4	6537 C3	9047 E5	L38 A2
2380 E3	3028 A5	3443 A2	4000 A5	6542 C3	9048 C4	L39 F3
2381 E3	3029 D5	3444 B2	4001 D5	6546 C2	9050 A4	L40 G3
2382 E3	3030 D5	3450 A1	4003 A5	6547 D3	9051 D4	L41 G1
2386 E3	3031 D5	3451 A1	4004 C5	6551 D4	9052 D4	L61 G2
2401 B3	3032 D5	3455 A1	4005 C5	6601 E1	9053 D5	L65 G2
2402 B2	3033 D4	3456 A2	4006 D5	6611 B2	9054 D4	L66 D1
2403 A2	3034 D4	3457 A2	4007 C5	6801 B4	9055 A4	L70 A2
2404 A2	3035 C5	3458 A1	4074 A5	6802 B4	9056 A4	L80 G4
2405 A2	3036 D4	3459 A1	4200 E3	6803 B4	9057 C4	L90 C3
2406 B3	3037 D4	3460 B1	4402 C4	6804 B4	9058 G2	SK1 G3
2407 B2	3040 A5	3461 A1	4403 A2	7000 C5	9059 G1	SK2 A3
2408 C3	3041 A5	3462 A1	4406 B2	7001 D5	9060 G1	
2409 B2	3043 C4	3463 A1	4407 B1	7002 C5	9063 B5	
2410 B2	3044 A5	3464 A2	4408 B4	7003 A5	9064 B5	
2411 B2	3049 G1	3465 A2	4409 B4	7004 A5	9065 B4	
2412 C3	3050 G1	3466 A1	4415 E2	7005 D5	9066 B5	
2413 C3	3051 G1	3467 B2	4460 B1	7006 D5	9067 A3	
2415 A3	3052 G1	3468 A2	4461 B2	7007 D5	9203 D4	
2416 B3	3053 G1	3469 A1	4508 B2	7008 D5	9205 H1	




Main sound output amplifiers  
Haupt-Tonendstufen  
Amplificatori di potenza del suono  
Amplificateurs principaux de sortie son

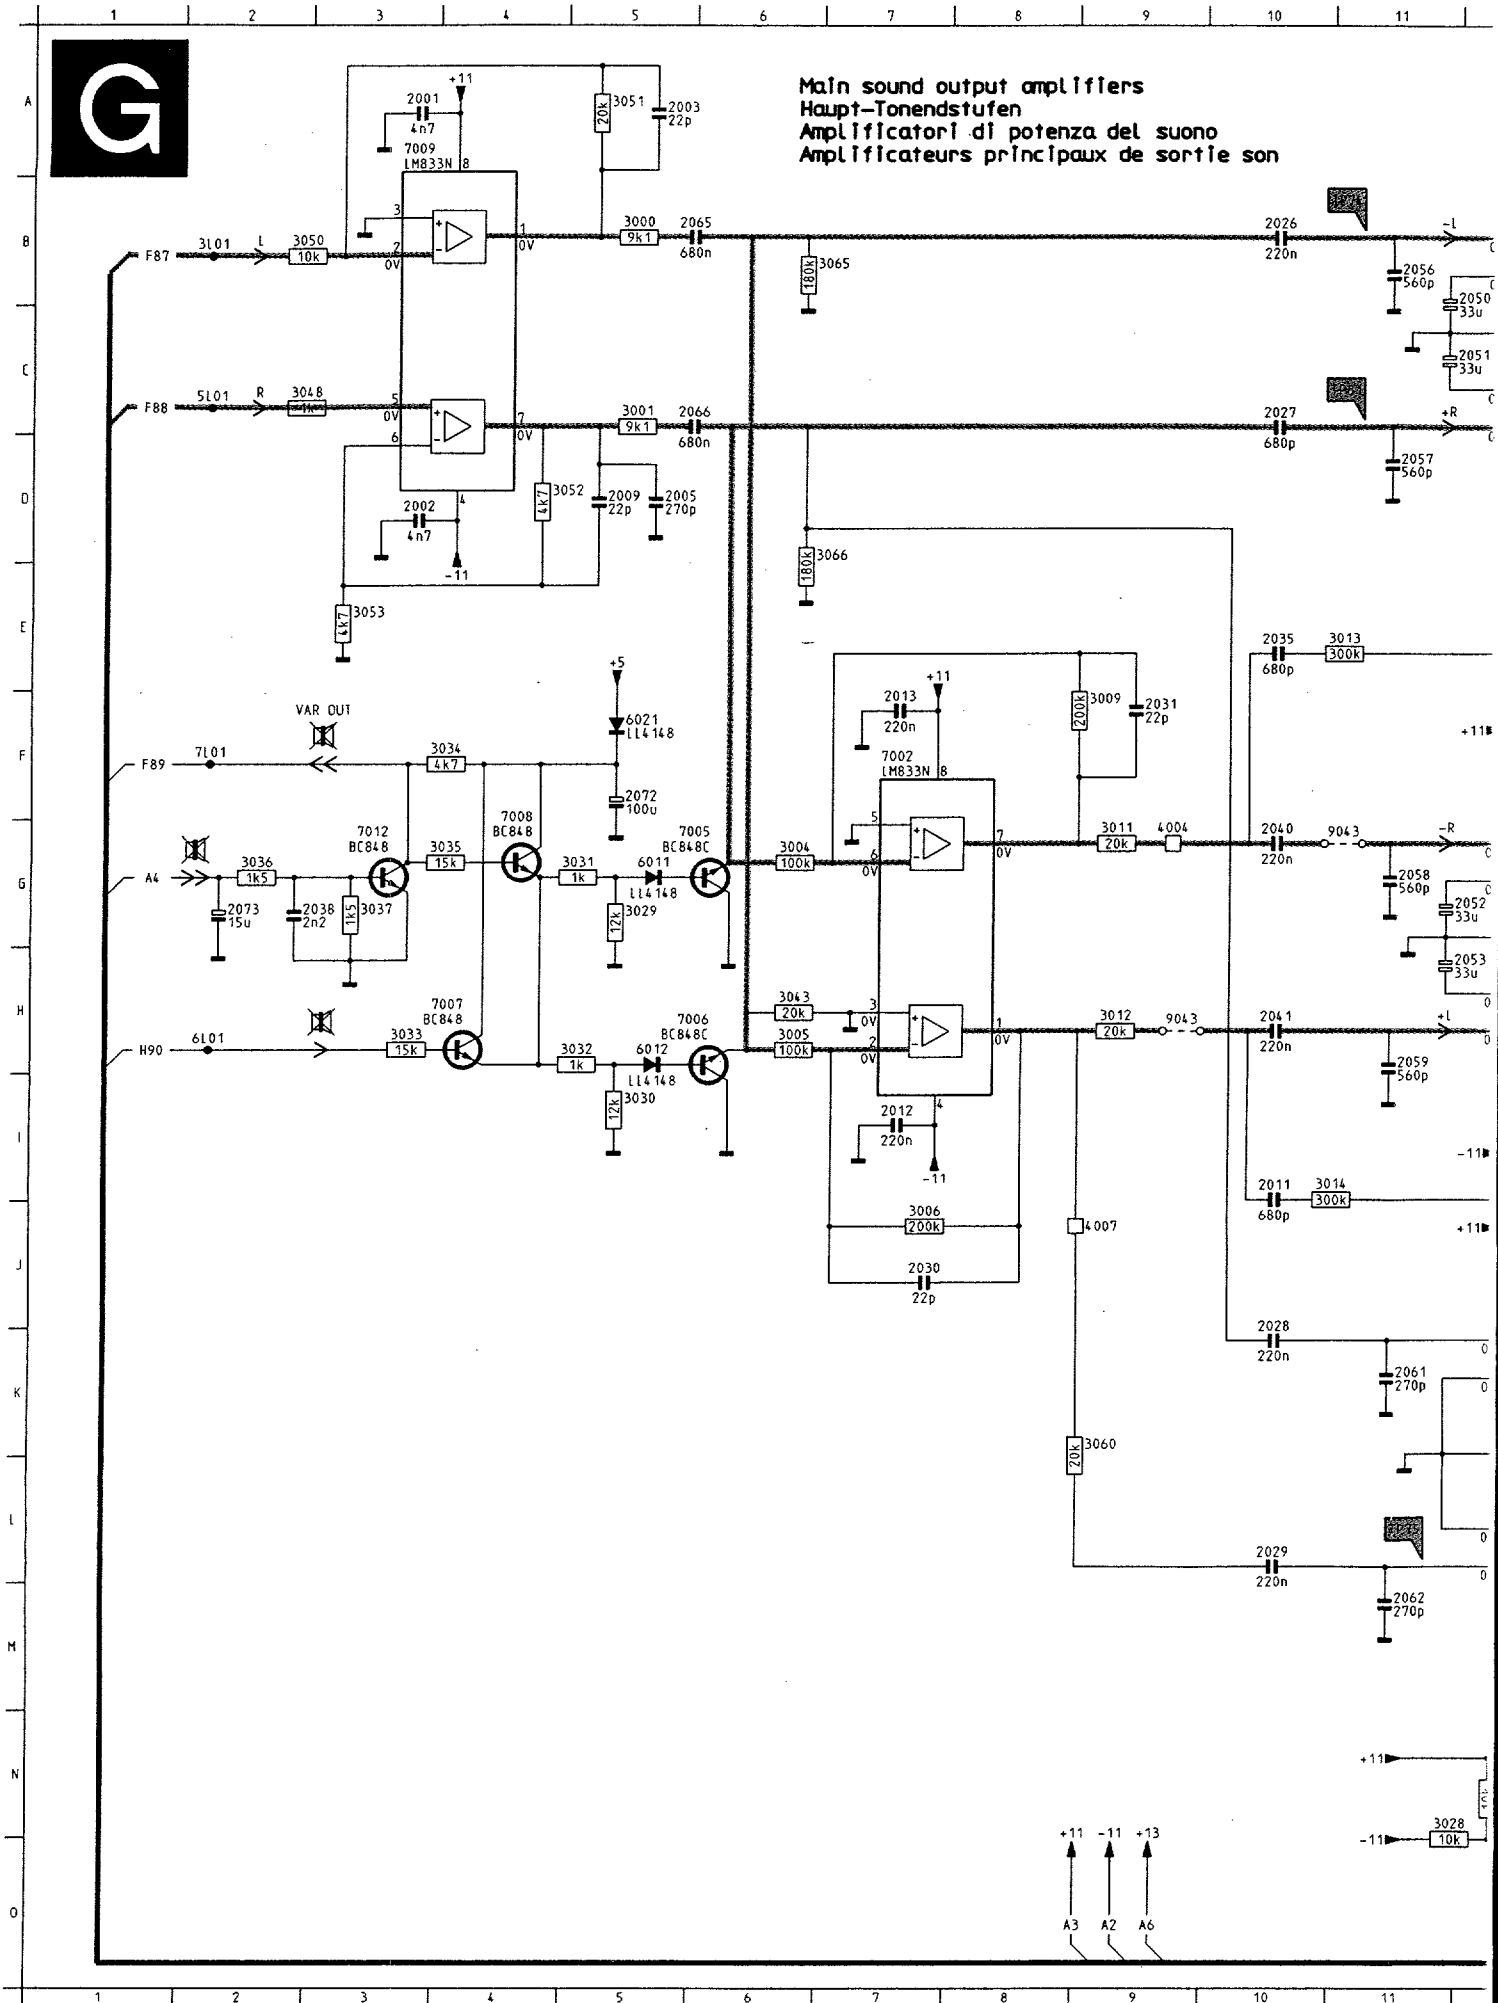

Amplification audio

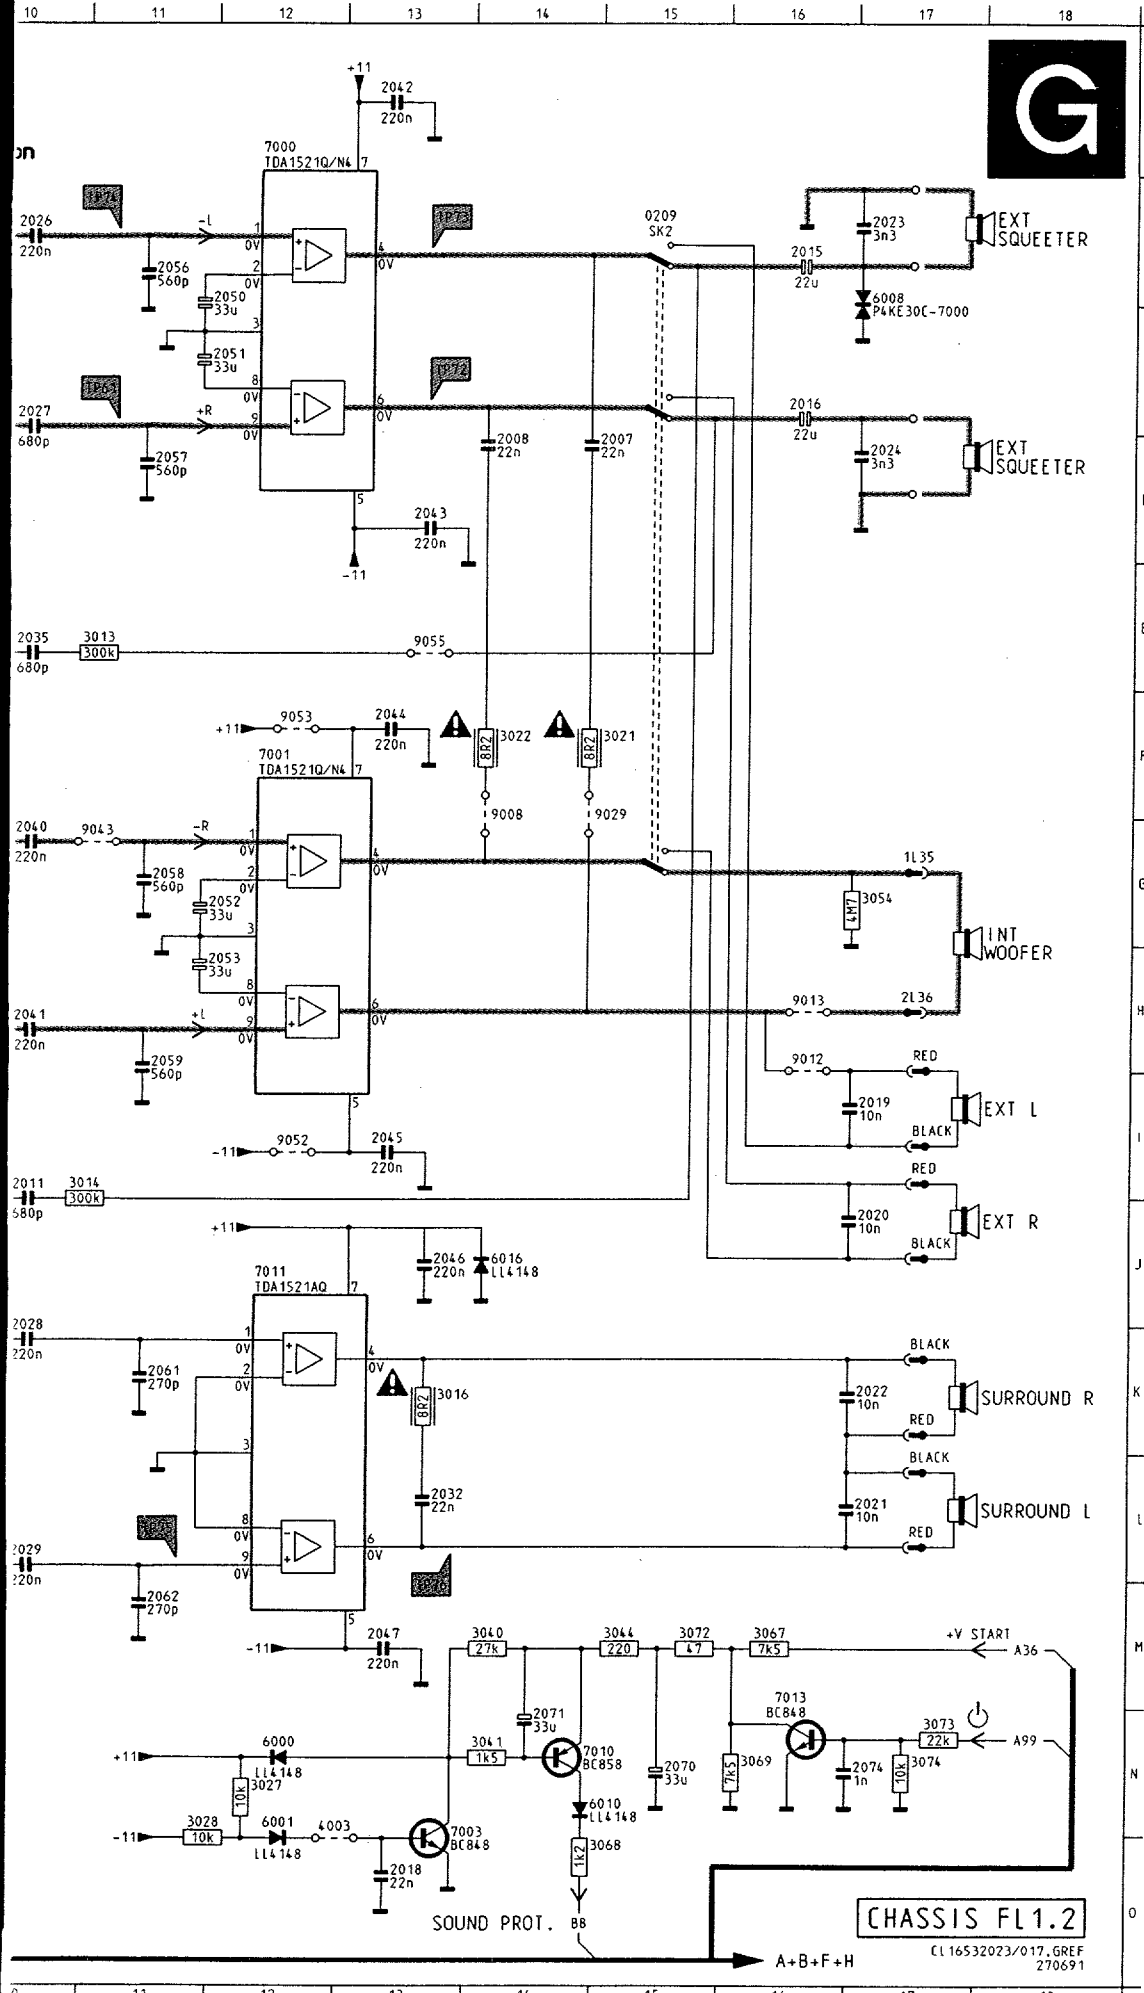



0209	B15	7009	A 3
2001	A 3	7010	N14
2002	D 3	7011	J12
2003	A 5	7012	G 3
2005	D 5	7013	M16
2007	D14	9008	F14
2008	D14	9012	H16
2009	D 5	9013	H16
2011	I10	9029	F14
2012	I 7	9043	G11
2013	F 7	9043	H 9
2015	B16	9052	I12
2016	C16	9053	F12
2018	O13	9055	E13
2019	I17		
2020	J17		
2021	L17		
2022	K17		
2023	B17		
2024	D17		
2026	B10		
2027	C10		
2028	K10		
2029	L10		
2030	J 7		
2031	F 9		
2032	L13		
2035	E10		
2038	G 2		
2040	G10		
2041	H10		
2042	A13		
2043	D13		
2044	F13		
2045	I13		
2046	J13		
2047	M13		
2050	B11		
2051	C11		
2052	G11		
2053	H11		
2056	B11		
2057	D11		
2058	G11		
2059	H11		
2061	K11		
2062	M11		
2065	B 5		
2066	C 5		
2070	N15		
2071	N14		
2072	F 5		
2073	G 2		
2074	N17		
3000	B 5		
3001	C 5		
3004	G 6		
3005	H 6		
3006	J 7		
3009	F 9		
3011	G 9		
3012	H 9		
3013	E11		
3014	I11		
3016	K13		
3021	F15		
3022	F14		
3027	N12		
3028	N11		
3029	G 5		
3030	I 5		
3031	G 5		
3032	H 5		
3033	H 3		
3034	F 4		
3035	G 4		
3036	G 2		
3037	G 3		
3040	M14		
3041	N14		
3043	H 6		
3044	M15		
3048	C 2		
3050	B 2		
3051	A 5		
3052	D 4		
3053	E 3		
3054	G17		
3060	K 9		
3065	B 6		
3066	D 6		
3067	M16		
3068	O14		
3069	N16		
3072	M15		
3073	M17		
3074	N17		
4003	M13		
4004	G 9		
4007	J 9		
6000	N12		
6001	N12		
6008	B17		
6010	N14		
6011	G 5		
6012	H 5		
6016	J14		
6021	F 5		
7000	A12		
7001	F12		
7002	F 7		
7003	O13		
7005	G 5		
7006	H 5		
7007	H 3		
7008	G 4		

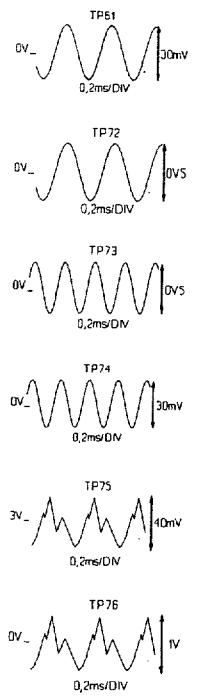


CHASSIS FL1.2  
 CL16532023/017, GREF  
 270691



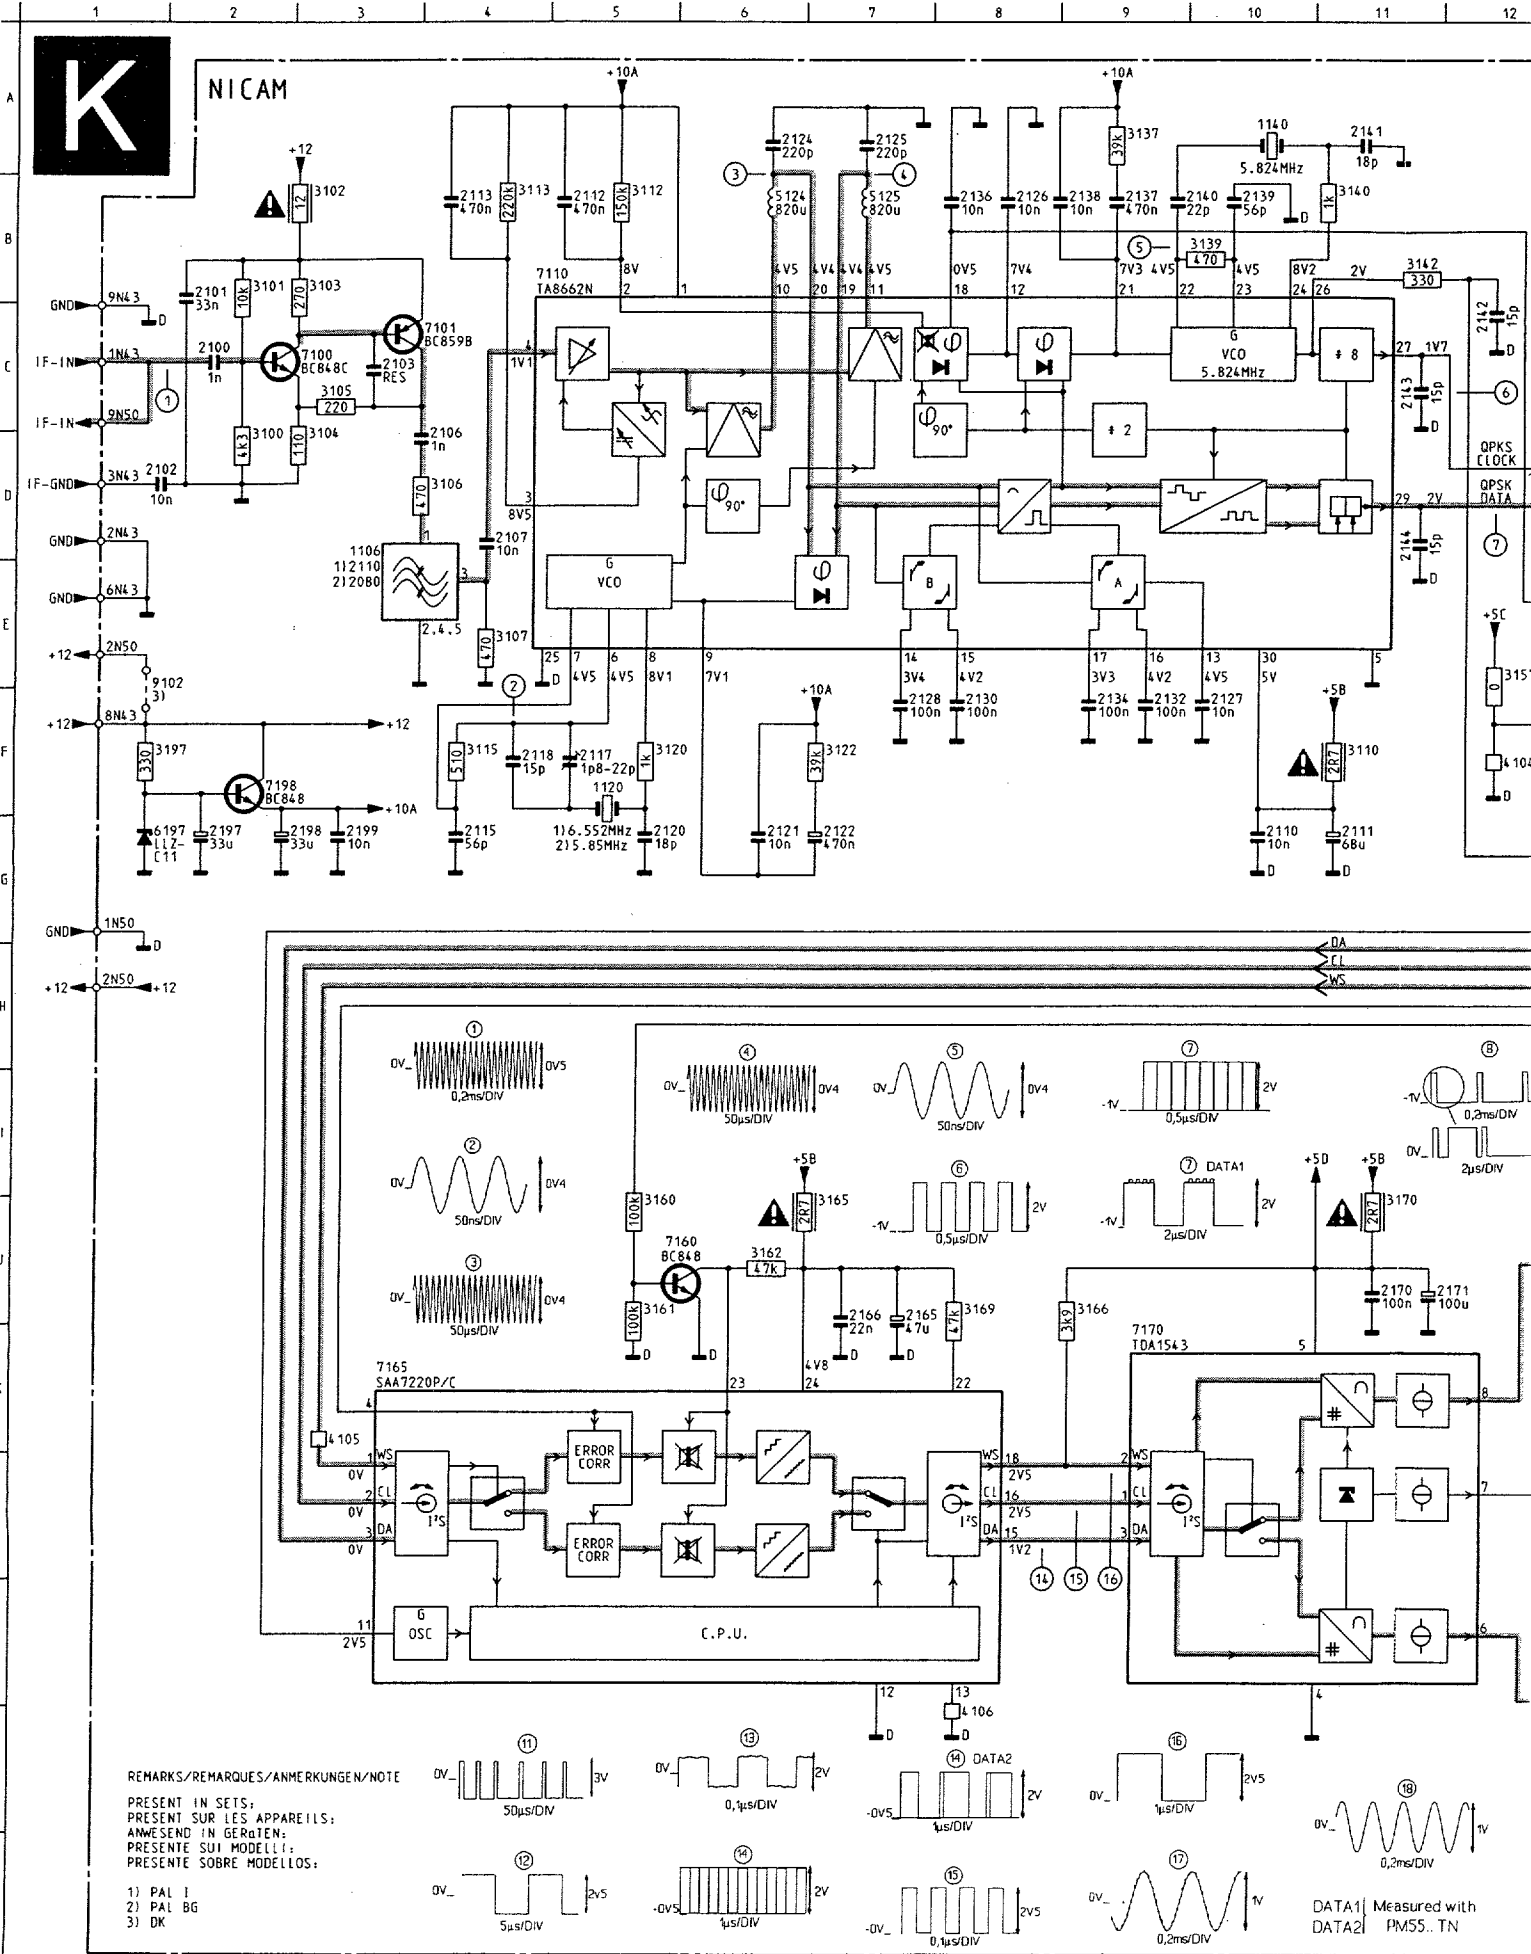

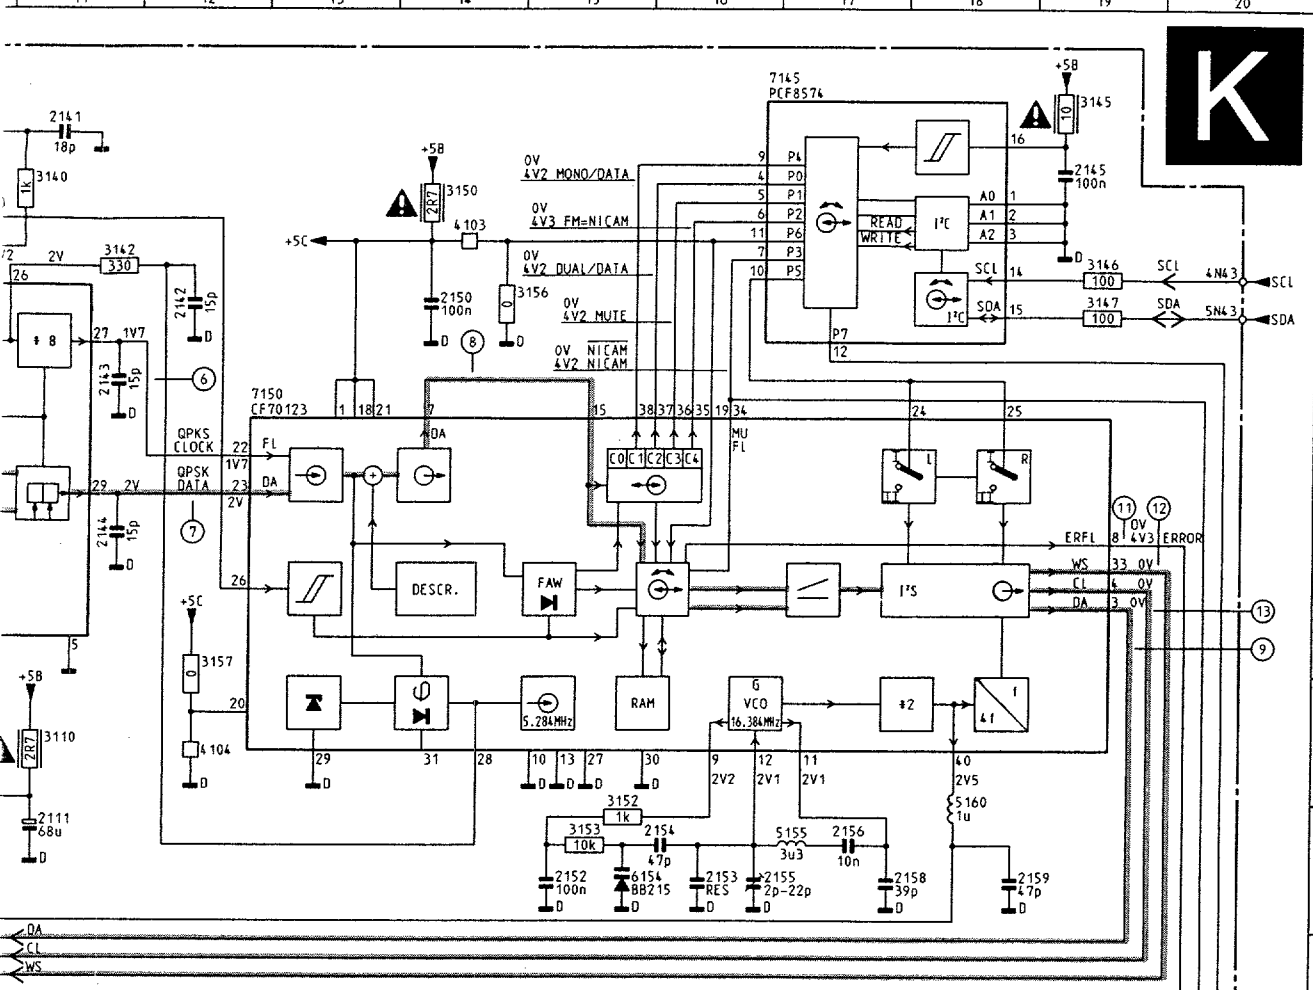


1106	D 3	4102	I20
1120	F 5	4103	B14
1140	A10	4104	F12
2100	C 2	4105	K 3
2101	B 2	4106	N 8
2102	D 1	4107	J17
2103	C 3	4108	O16
2106	D 4	5124	B 6
2107	D 4	5125	B 7
2110	G10	5155	G17
2111	G11	5160	G18
2112	B 5	6154	G15
2113	B 4	6197	G 1
2115	G 4	7100	C 3
2117	F 5	7101	C 4
2118	F 4	7110	B 4
2120	G 5	7145	A16
2121	G 6	7150	C12
2122	G 7	7160	J 6
2124	A 6	7165	K 3
2125	A 7	7170	K 9
2126	B 8	7175	J16
2127	F10	7185	M16
2128	F 7	7195	F 2
2130	F 8	7198	F 2
2132	F 9	9102	F 1
2134	F 9		
2136	B 8		
2137	B 9		
2138	B 9		
2139	B10		
2140	B 9		
2141	A11		
2142	C12		
2143	C11		
2144	D11		
2145	B19		
2150	C14		
2152	G15		
2153	G16		
2154	G16		
2155	G16		
2156	G17		
2158	G17		
2159	G18		
2165	J 7		
2166	J 7		
2170	J11		
2171	J12		
2175	K13		
2176	K14		
2177	L13		
2178	H14		
2179	L15		
2180	L15		
2181	L14		
2182	J16		
2185	O13		
2186	O14		
2187	L13		
2188	L14		
2189	L15		
2190	L15		
2191	O14		
2192	M16		
2197	G 2		
2198	G 2		
2199	G 3		
3100	C 2		
3101	B 2		
3102	B 3		
3103	B 3		
3104	C 3		
3105	C 3		
3106	D 4		
3107	E 4		
3110	F11		
3112	B 5		
3113	B 4		
3115	F 4		
3120	F 5		
3122	F 7		
3137	A 9		
3139	B10		
3140	B11		
3142	B11		
3145	A19		
3146	B19		
3147	C19		
3150	B14		
3152	G15		
3153	G15		
3156	B14		
3157	E12		
3160	I 5		
3161	J 5		
3162	J 6		
3165	I 7		
3166	J 9		
3169	J 8		
3170	I11		
3175	K13		
3177	I13		
3178	H13		
3179	H14		
3180	I14		
3182	J16		
3184	O13		
3185	N13		
3187	H13		
3188	L13		
3189	L14		
3190	L14		
3192	N16		
3197	F 1		
4101	J20		

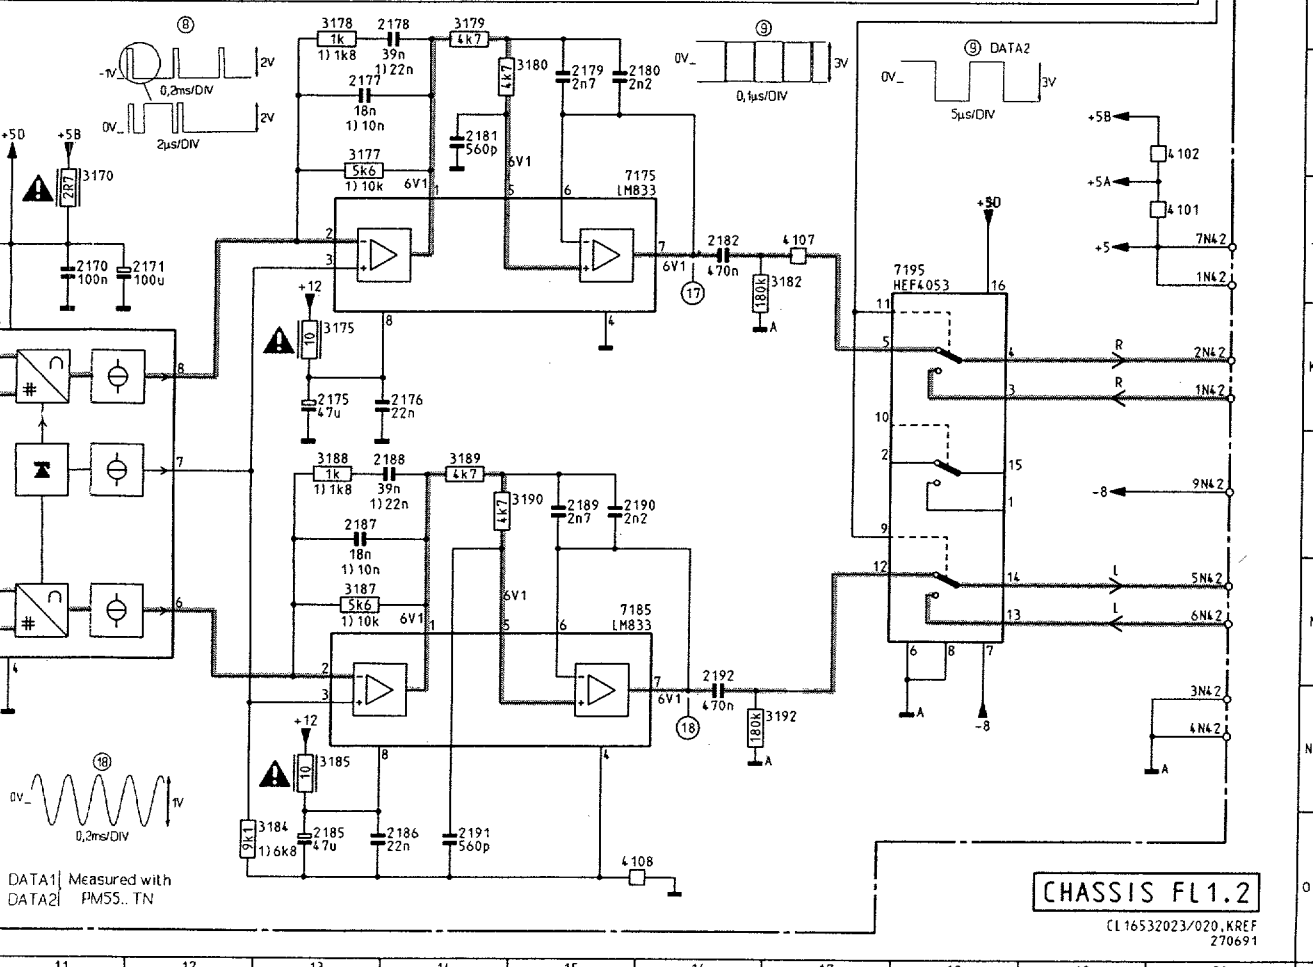

1106	D 3	4102	I20
1120	F 5	4103	B14
1140	A10	4104	F12
2100	C 2	4105	K 3
2101	B 2	4106	N 8
2102	D 1	4107	J17
2103	C 3	4108	O16
2106	D 4	5124	B 6
2107	D 4	5125	B 7
2110	G10	5155	G17
2111	G11	5160	G18
2112	B 5	6154	G15
2113	B 4	6197	G 1
2115	G 4	7100	C 3
2117	F 5	7101	C 4
2118	F 4	7110	B 4
2120	G 5	7145	A16
2121	G 6	7150	C12
2122	G 7	7160	J 6
2124	A 6	7165	K 3
2125	A 7	7170	K 9
2126	B 8	7175	J16
2127	F10	7185	M16
2128	F 7	7195	F 2
2130	F 8	7198	F 2
2132	F 9	9102	F 1
2134	F 9		
2136	B 8		
2137	B 9		
2138	B 9		
2139	B10		
2140	B 9		
2141	A11		
2142	C12		
2143	C11		
2144	D11		
2145	B19		
2150	C14		
2152	G15		
2153	G16		
2154	G16		
2155	G16		
2156	G17		
2158	G17		
2159	G18		
2165	J 7		
2166	J 7		
2170	J11		
2171	J12		
2175	K13		
2176	K14		
2177	L13		
2178	H14		
2179	L15		
2180	L15		
2181	L14		
2182	J16		
2185	O13		
2186	O14		
2187	L13		
2188	L14		
2189	L15		
2190	L15		
2191	O14		
2192	M16		
2197	G 2		
2198	G 2		
2199	G 3		
3100	C 2		
3101	B 2		
3102	B 3		
3103	B 3		
3104	C 3		
3105	C 3		
3106	D 4		
3107	E 4		
3110	F11		
3112	B 5		
3113	B 4		
3115	F 4		
3120	F 5		
3122	F 7		
3137	A 9		
3139	B10		
3140	B11		
3142	B11		
3145	A19		
3146	B19		
3147	C19		
3150	B14		
3152	G15		
3153	G15		
3156	B14		
3157	E12		
3160	I 5		
3161	J 5		
3162	J 6		
3165	I 7		
3166	J 9		
3169	J 8		
3170	I11		
3175	K13		
3177	I13		
3178	H13		
3179	H14		
3180	I14		
3182	J16		
3184	O13		
3185	N13		
3187	H13		
3188	L13		
3189	L14		
3190	L14		
3192	N16		
3197	F 1		
4101	J20		


CHASSIS FL1.2

CL16532023/020, KREF 270691






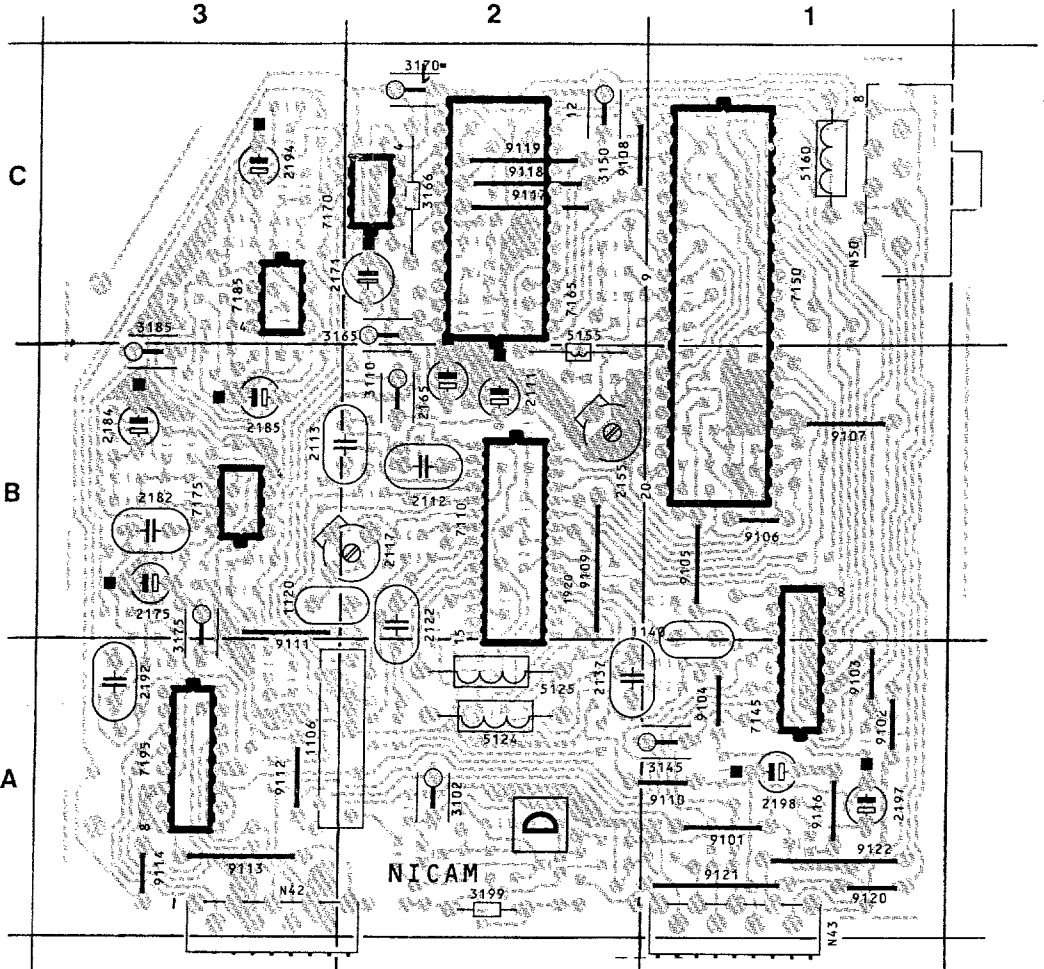


1106 A2	2120 A2	2141 B2	2171 C2	2190 B3	3106 A2	3152 C2	3182 B3	4101 A3	6197 A1	9104 A1	9121 A1
1120 B3	2121 A2	2142 C1	2175 B3	2191 C3	3107 B3	3153 C2	3183 B3	4102 A3	7100 A2	9105 B1	9122 A1
1140 B1	2122 B2	2143 B1	2176 B3	2192 A3	3110 B2	3156 B1	3184 B3	4103 B1	7101 A2	9106 B1	N42 A2
2100 A2	2124 A2	2144 B1	2177 B3	2193 C3	3112 B2	3157 B1	3185 B3	4104 B1	7110 B2	9107 B1	N43 A1
2101 A2	2125 A2	2145 A1	2178 A3	2194 C3	3113 B2	3160 C2	3186 B3	4105 C1	7145 A1	9108 C2	N50 C1
2102 A1	2126 B2	2150 C1	2179 B3	2195 B3	3115 B2	3161 C2	3187 C3	4106 C2	7150 C1	9109 B2	
2103 A2	2127 B2	2152 C2	2180 B3	2196 C3	3120 B2	3162 C2	3188 C3	4107 C3	7160 C2	9110 A1	
2106 A2	2128 A2	2153 C1	2181 B3	2197 A1	3122 A2	3165 C2	3189 C3	4108 C3	7165 C2	9111 B3	
2107 B2	2130 A2	2154 B2	2182 B3	2198 A1	3137 A1	3166 C2	3190 B3	4109 B3	7170 C2	9112 A3	
2110 B2	2132 A2	2155 B2	2183 B3	2199 A1	3139 B2	3170 C2	3191 C3	4110 A2	7175 B3	9113 A3	
2111 B2	2134 A2	2156 C2	2184 B3	3100 A2	3140 B2	3175 B3	3192 A3	4111 B2	7185 C3	9114 A3	
2112 B2	2136 A2	2158 C1	2185 B3	3101 A2	3142 B1	3177 B3	3193 C3	5124 A2	7195 A3	9115 A1	
2113 B2	2137 A2	2159 C1	2186 B3	3102 A2	3145 A1	3178 A3	3196 C3	5125 A2	7198 A1	9117 C2	
2115 B2	2138 A1	2165 B2	2187 C3	3103 A2	3146 A1	3179 B3	3197 A1	5155 B2	9101 A1	9118 C2	
2117 B3	2139 B2	2166 C2	2188 C3	3104 A2	3147 A1	3180 B3	3198 A2	5160 C1	9102 A1	9119 C2	
2118 B2	2140 B1	2170 C2	2189 C3	3105 A2	3150 C2	3181 B3	3199 A2	6154 B2	9103 A1	9120 A1	


NICAM

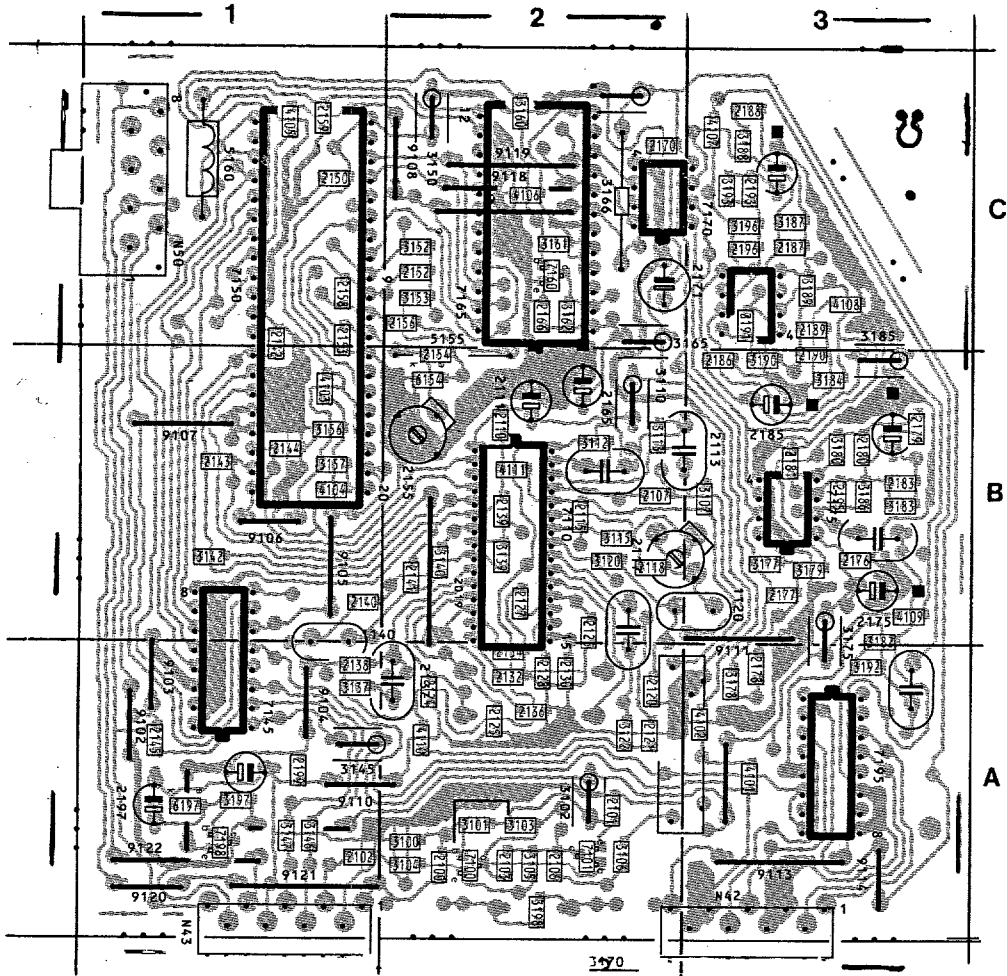


1106 A2	2120 A2	2141 B2	2171 C2	2190 B3	3106 A2	3152 C2	3182 B3	4101 A3	6197 A1	9104 A1	9121 A1
1120 B3	2121 A2	2142 C1	2175 B3	2191 C3	3107 B3	3153 C2	3183 B3	4102 A3	7100 A2	9105 B1	9122 A1
1140 B1	2122 B2	2143 B1	2176 B3	2192 A3	3110 B2	3156 B1	3184 B3	4103 B1	7101 A2	9106 B1	N42 A2
2100 A2	2124 A2	2144 B1	2177 B3	2193 C3	3112 B2	3157 B1	3185 B3	4104 B1	7110 B2	9107 B1	N43 A1
2101 A2	2125 A2	2145 A1	2178 A3	2194 C3	3113 B2	3160 C2	3186 B3	4105 C1	7145 A1	9108 C2	N50 C1
2102 A1	2126 B2	2150 C1	2179 B3	2195 B3	3115 B2	3161 C2	3187 C3	4106 C2	7150 C1	9109 B2	
2103 A2	2127 B2	2152 C2	2180 B3	2196 C3	3120 B2	3162 C2	3188 C3	4107 C3	7160 C2	9110 A1	
2106 A2	2128 A2	2153 C1	2181 B3	2197 A1	3122 A2	3165 C2	3189 C3	4108 C3	7165 C2	9111 B3	
2107 B2	2130 A2	2154 B2	2182 B3	2198 A1	3137 A1	3166 C2	3190 B3	4109 B3	7170 C2	9112 A3	
2110 B2	2132 A2	2155 B2	2183 B3	2199 A1	3139 B2	3170 C2	3191 C3	4110 A2	7175 B3	9113 A3	
2111 B2	2134 A2	2156 C2	2184 B3	3100 A2	3140 B2	3175 B3	3192 A3	4111 B2	7185 C3	9114 A3	
2112 B2	2136 A2	2158 C1	2185 B3	3101 A2	3142 B1	3177 B3	3193 C3	5124 A2	7195 A3	9116 A1	
2113 B2	2137 A2	2159 C1	2186 B3	3102 A2	3145 A1	3178 A3	3196 C3	5125 A2	7198 A1	9117 C2	
2115 B2	2138 A1	2165 B2	2187 C3	3103 A2	3146 A1	3179 B3	3197 A1	5155 B2	9101 A1	9118 C2	
2117 B3	2139 B2	2166 C2	2188 C3	3104 A2	3147 A1	3180 B3	3198 A2	5160 C1	9102 A1	9119 C2	
2118 B2	2140 B1	2170 C2	2189 C3	3105 A2	3150 C2	3181 B3	3199 A2	6154 B2	9103 A1	9120 A1	



HIGH-END BOX TXT-DECODER

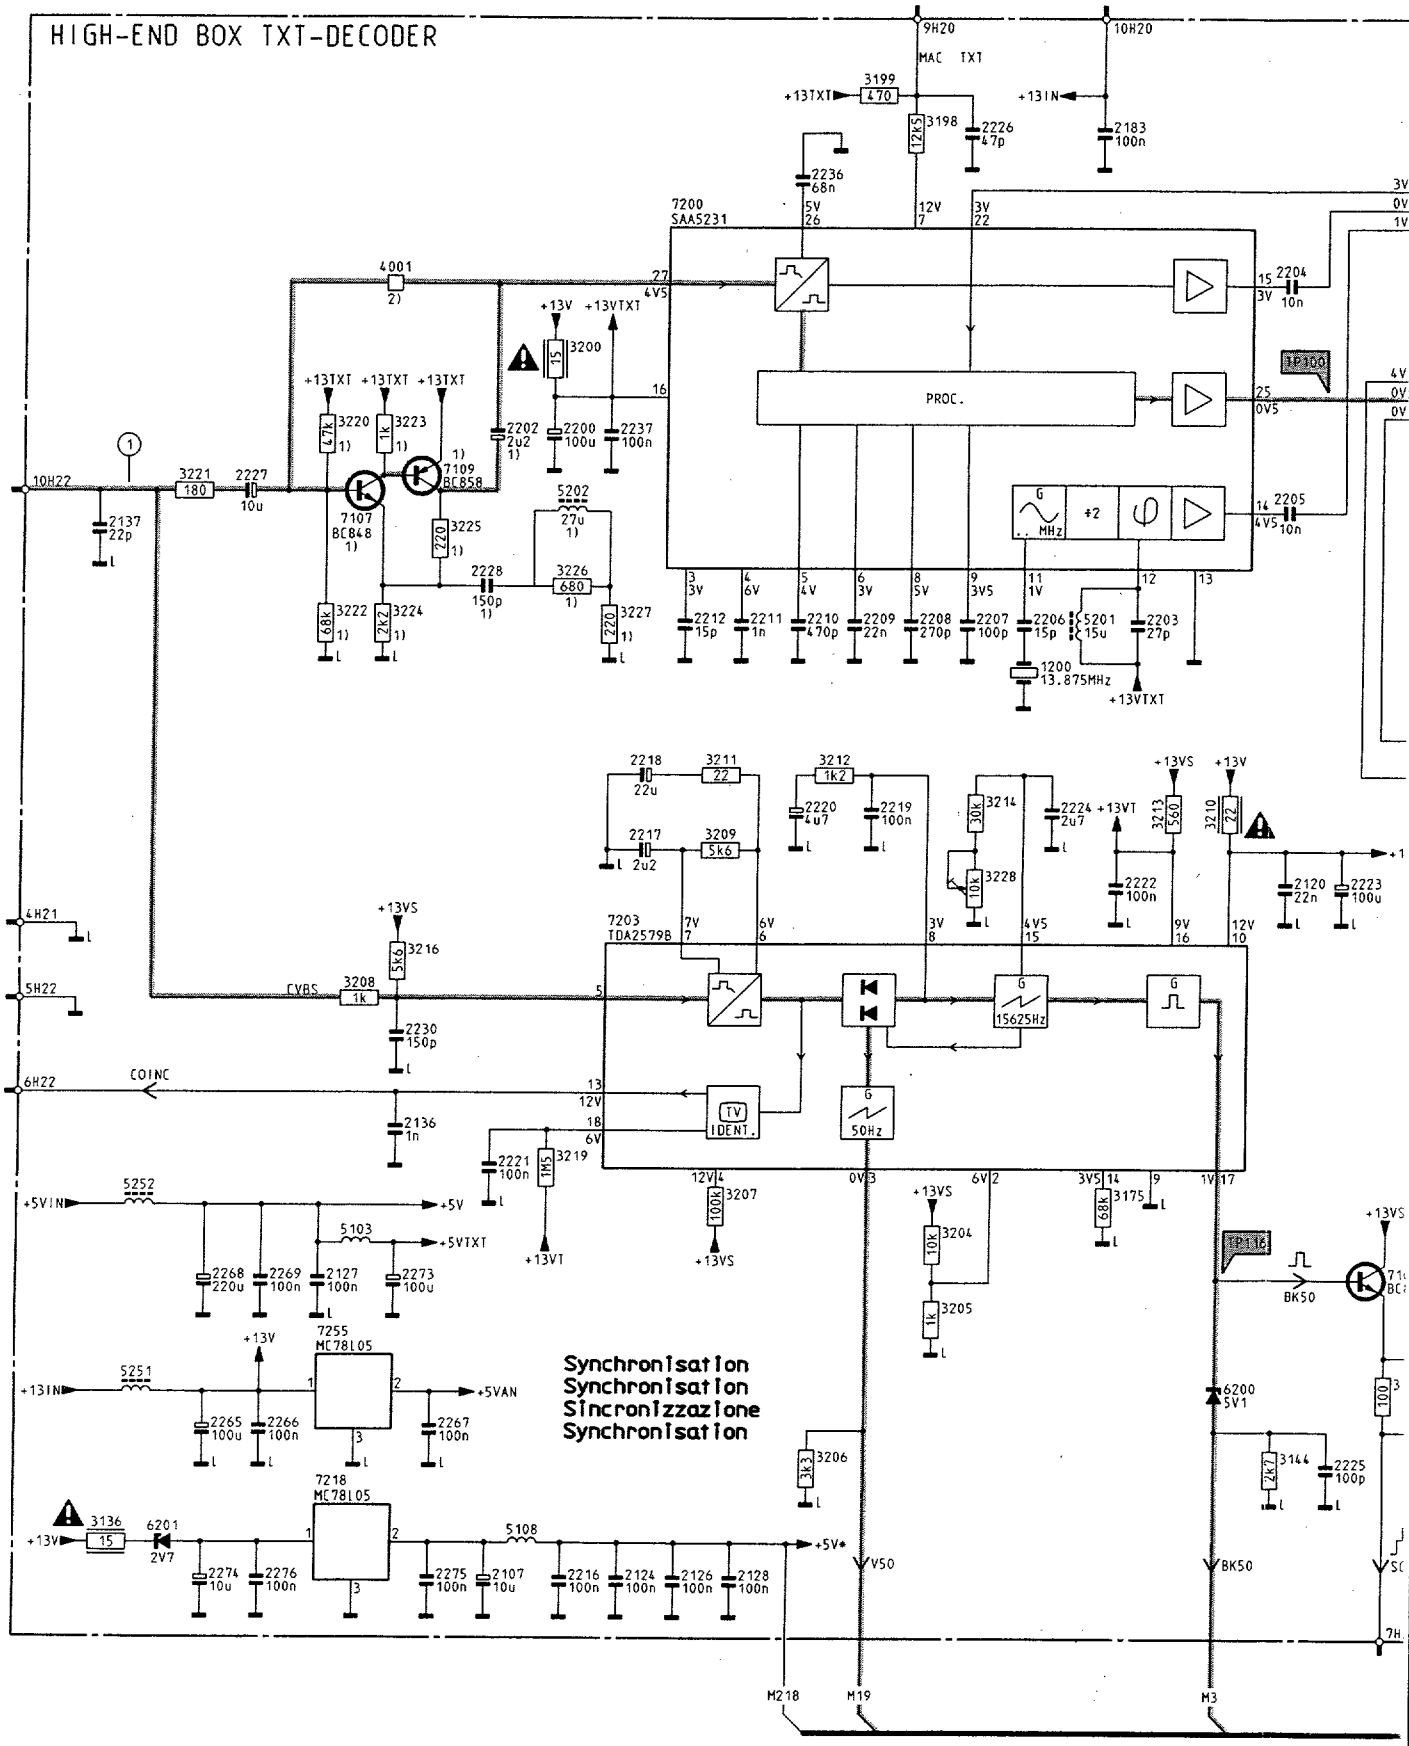

Synchronisation  
Synchronisation  
Sincronizzazione  
Synchronisation

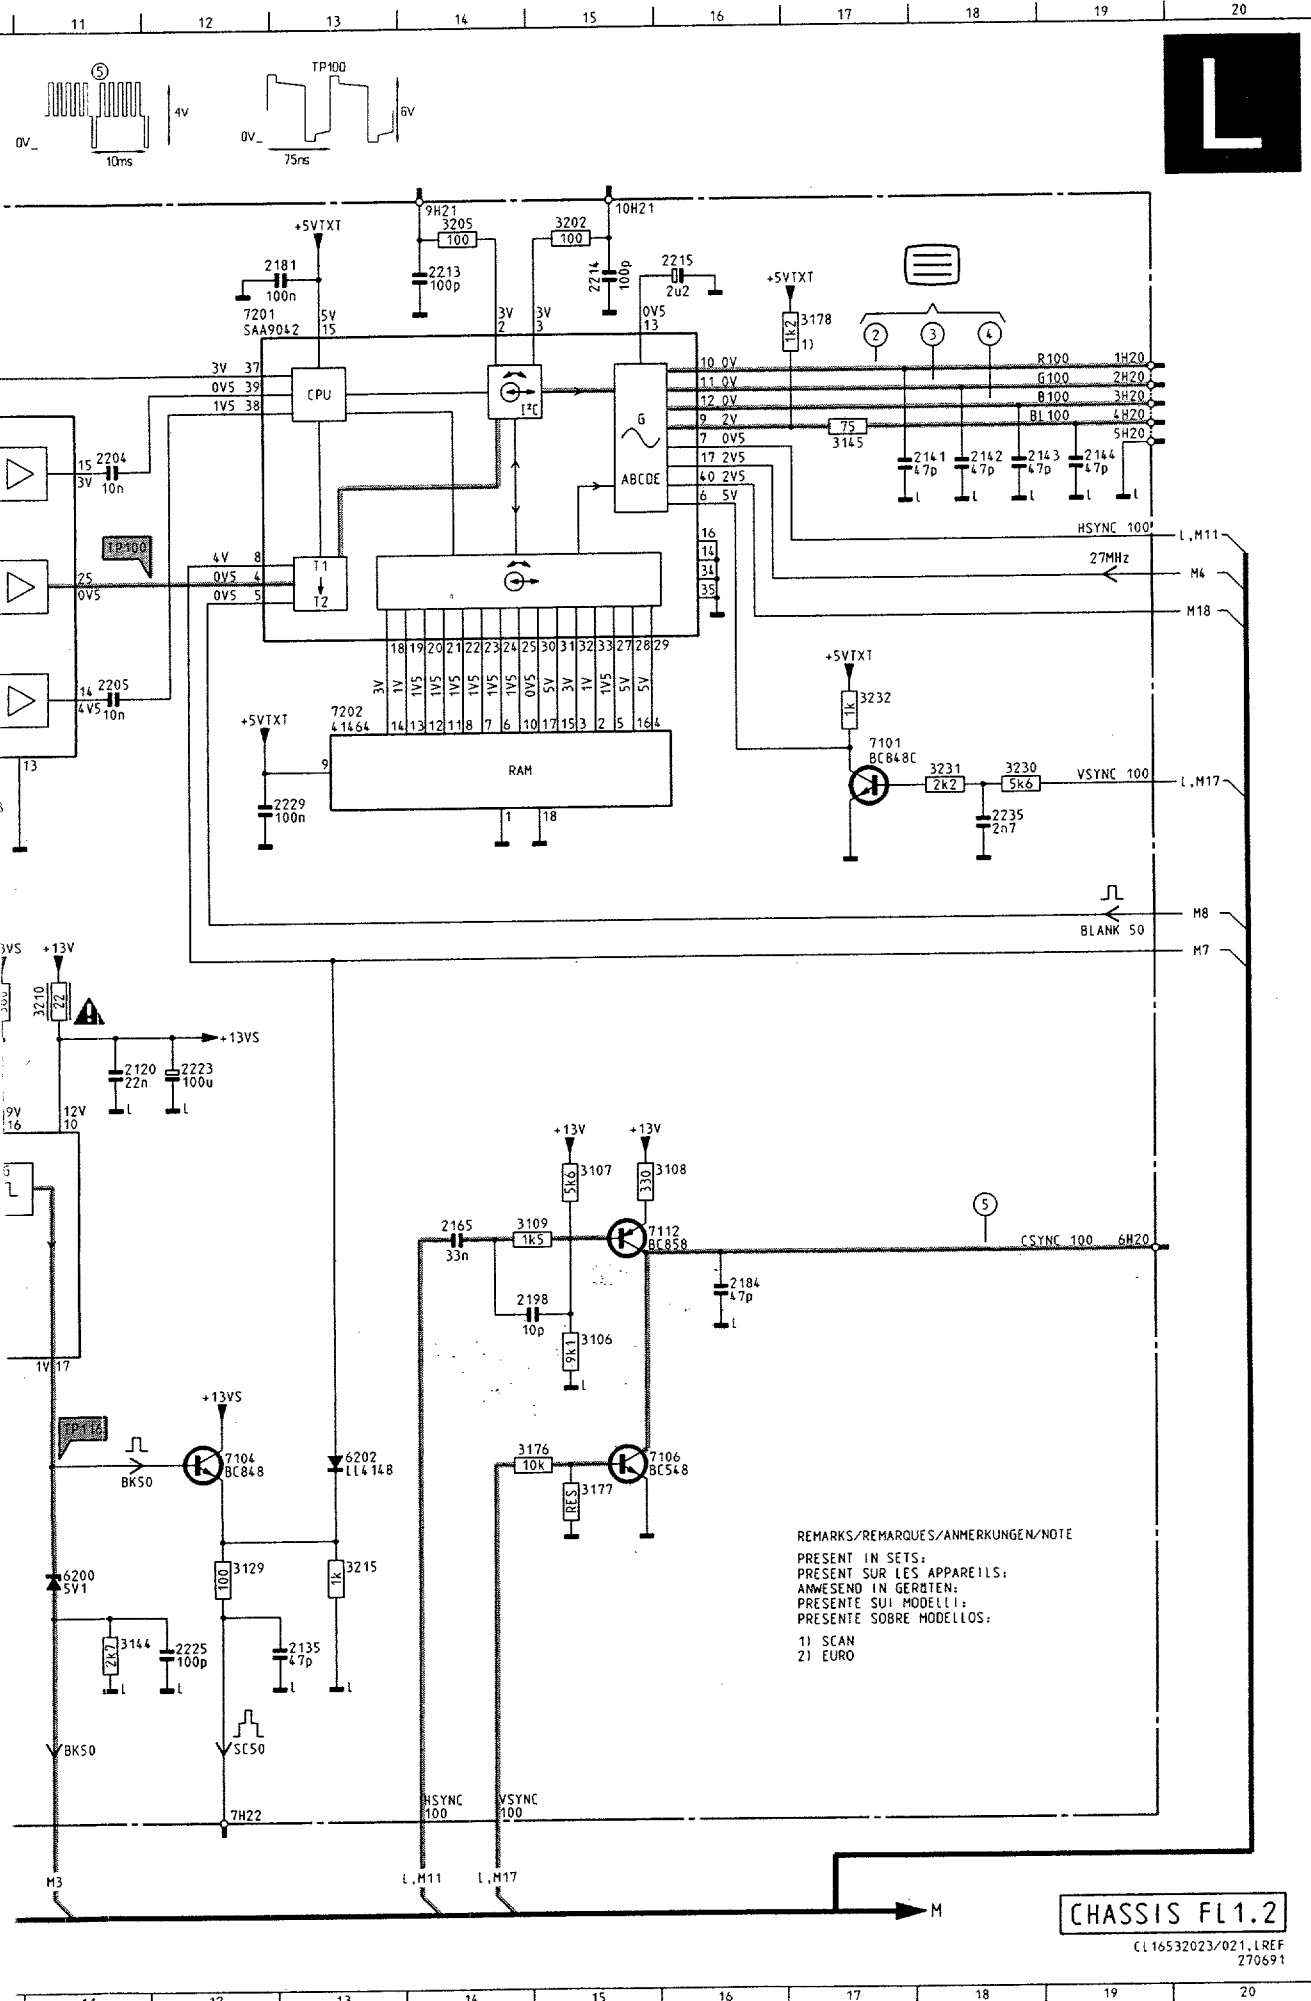


1200	G 9	7107	F 4
2107	N 5	7109	E 5
2120	H11	7112	J15
2124	N 6	7200	C 6
2126	N 7	7201	C12
2127	L 4	7202	F13
2128	N 7	7203	I 6
2135	M13	7218	M 4
2136	J 4	7255	L 4
2137	F 2		
2141	D18		
2142	D18		
2143	D18		
2144	D19		
2165	J14		
2181	B13		
2183	C10		
2184	J16		
2198	J14		
2200	E 6		
2202	E 5		
2203	F10		
2204	D11		
2205	E11		
2206	F 9		
2207	F 9		
2208	F 8		
2209	F 8		
2210	F 7		
2211	F 7		
2212	F 7		
2213	B14		
2214	B15		
2215	B16		
2216	N 6		
2217	H 6		
2218	G 6		
2219	H 8		
2220	H 7		
2221	K 5		
2222	H10		
2223	H12		
2224	H 9		
2225	M12		
2226	C 9		
2227	E 3		
2228	F 5		
2229	F12		
2230	J 4		
2235	G18		
2236	C 7		
2237	E 6		
2265	M 3		
2266	M 3		
2267	M 5		
2268	L 3		
2269	L 3		
2273	L 4		
2274	N 3		
2275	N 5		
2276	N 3		
3106	K15		
3107	L15		
3108	L15		
3109	J14		
3129	L12		
3136	N 2		
3144	M11		
3145	C17		
3175	K10		
3176	K14		
3177	L15		
3178	C17		
3198	B 8		
3199	B 8		
3200	D 6		
3202	B15		
3204	K 9		
3205	B14		
3205	L 9		
3206	M 8		
3207	K 7		
3208	I 4		
3209	H 7		
3210	H11		
3211	G 7		
3212	G 8		
3213	H10		
3214	H 9		
3215	L13		
3216	I 4		
3219	K 6		
3220	E 4		
3221	E 3		
3222	F 4		
3223	E 4		
3224	F 4		
3225	F 5		
3226	F 6		
3227	F 6		
3228	H 9		
3230	F18		
3231	F18		
3232	E17		
4001	D 4		
5103	K 4		
5201	F10		
5202	E 6		
5251	L 2		
5252	K 2		
6200	L11		
6201	N 3		
6202	L13		
7101	F17		
7104	L12		
7106	L15		


REMARKS/REMARQUES/ANMERKUNGEN/NOTE  
 PRESENT IN SETS;  
 PRESENT SUR LES APPAREILS;  
 ANWESEND IN GERÄTEN;  
 PRESENTE SUI MODELLI;  
 PRESENTE SOBRE MODELLOS:  
 1) SCAN  
 2) EURO

CHASSIS FL1.2

CL16532023/021.LREF  
 270691

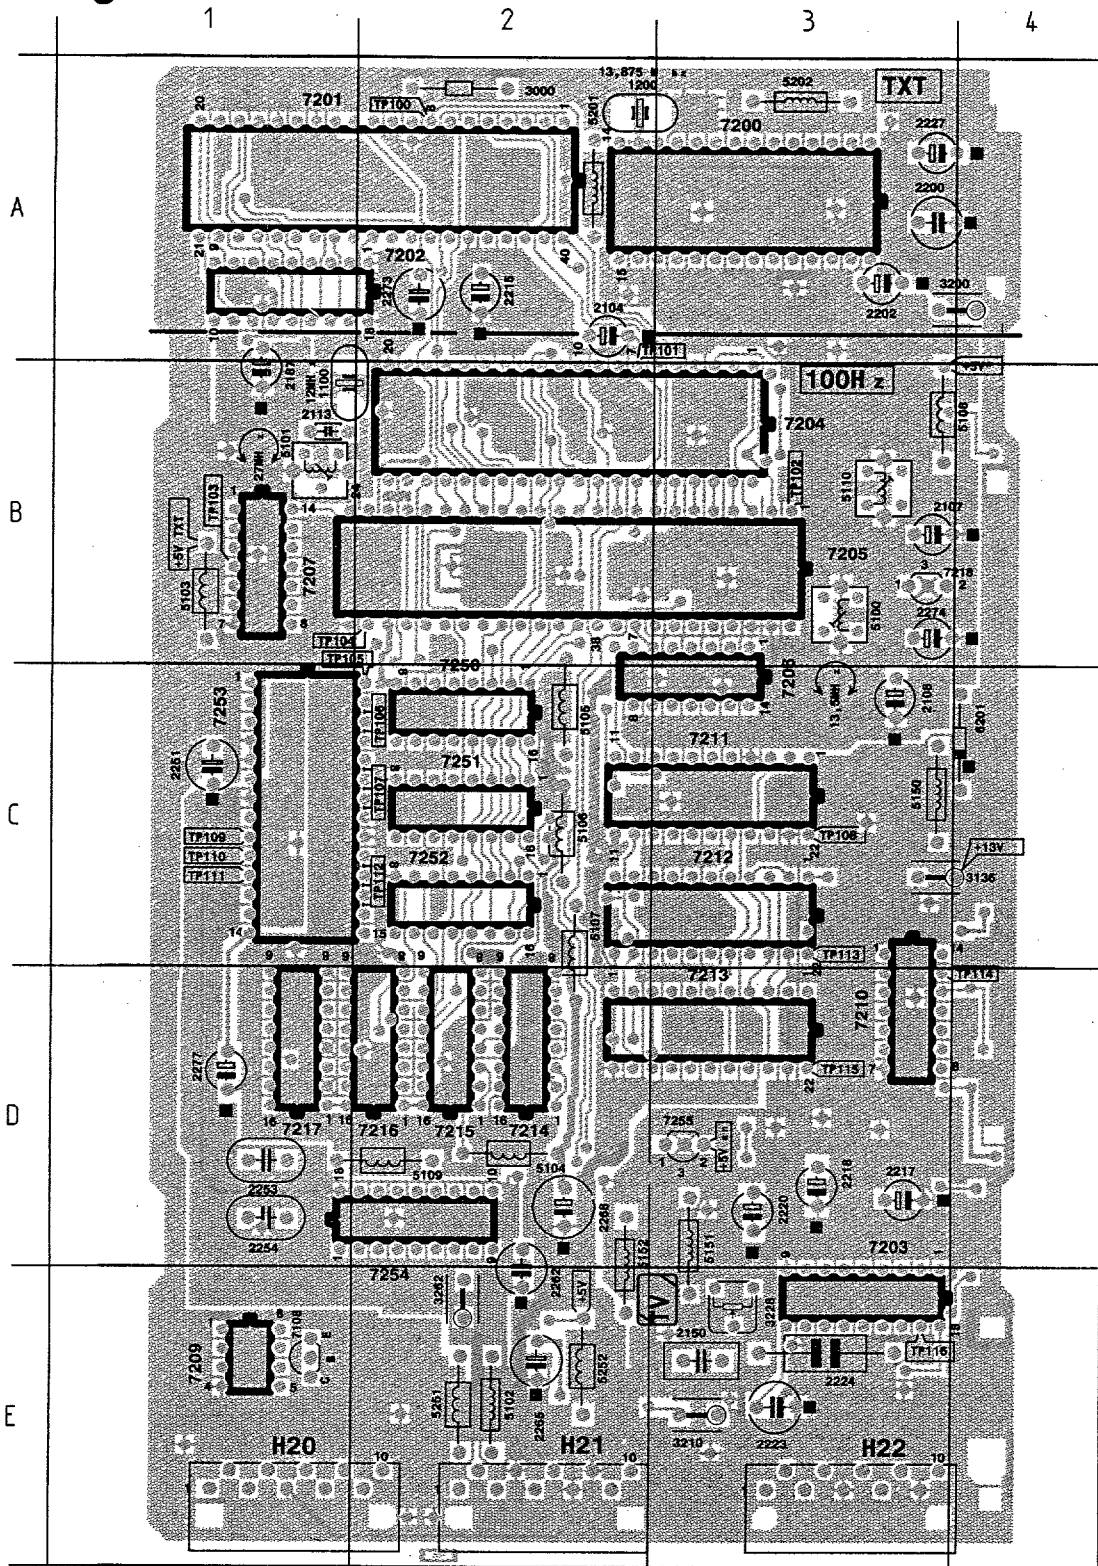


- H20 E1
- H21 E2
- H22 E3
- 1100 B1
- 1200 A2
- 2104 A2
- 2107 B3
- 2108 C3
- 2113 B1
- 2150 E3
- 2187 B1
- 2200 A3
- 2202 A3
- 2215 A2
- 2217 D3
- 2218 D3
- 2220 D3
- 2223 E3
- 2224 E3
- 2227 A3
- 2251 C1
- 2253 D1
- 2254 D1
- 2262 E2
- 2265 E2
- 2268 D2
- 2273 A2
- 2274 B3
- 2277 D1
- 3000 A2
- 3136 C3
- 3200 A3
- 3210 E3
- 3228 E3
- 3262 E2
- 5100 B3
- 5101 B1
- 5102 E2
- 5103 B1
- 5104 D2
- 5105 C2
- 5106 C2
- 5107 C2
- 5108 B3
- 5109 D2
- 5110 B3
- 5150 C3
- 5151 D3
- 5152 D2
- 5201 A2
- 5202 A3
- 5251 E2
- 5252 E2
- 6201 C4
- 7108 E1
- 7200 A3
- 7201 A2
- 7202 A2
- 7203 E3
- 7204 B3
- 7205 B3
- 7206 B3
- 7207 B1
- 7209 E1
- 7210 C3
- 7211 C3
- 7212 C3
- 7213 D3
- 7214 D2
- 7215 D2
- 7216 D2
- 7217 D1
- 7218 B3
- 7250 C2
- 7251 C2
- 7252 C2
- 7253 C1
- 7254 D1
- 7255 D3

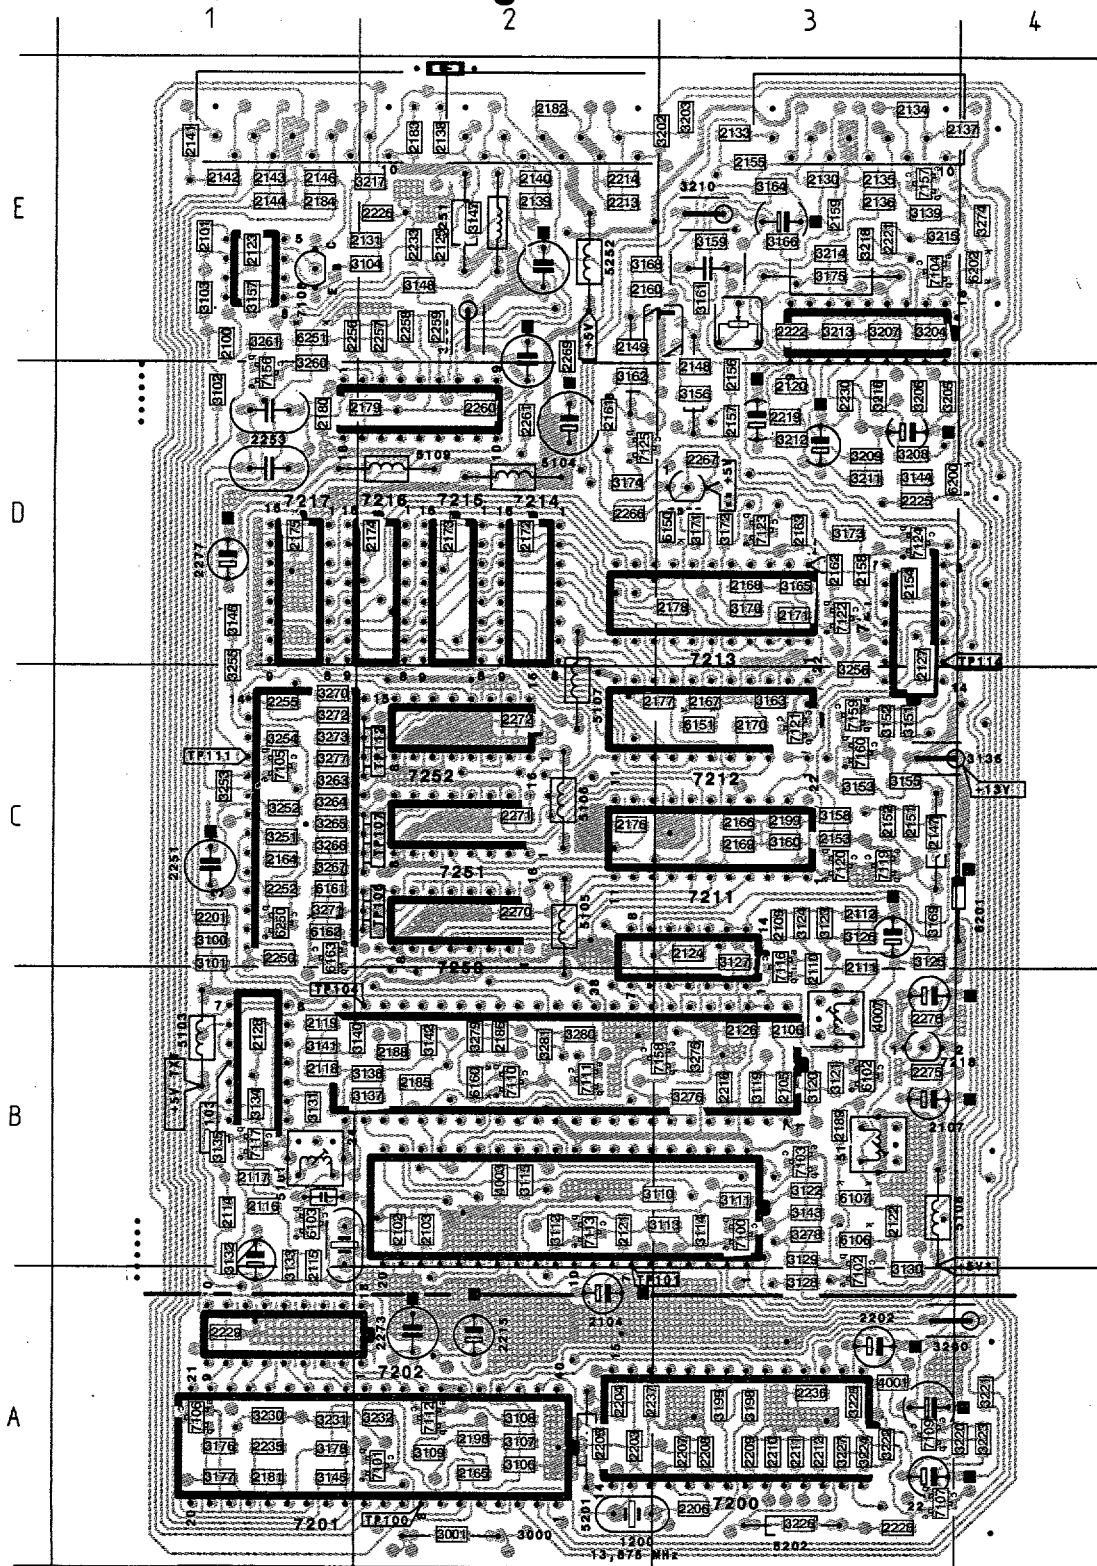


2201 C1	3137 B2	3281 B2
2202 A3	3138 B2	4001 A3
2203 A2	3139 E3	4003 B2
2204 A2	3140 B2	4007 B3
2205 A2	3141 B1	5100 B3
2206 A3	3142 B2	5101 B1
2207 A3	3143 B3	5102 E2
2208 A3	3144 D3	5103 B1
2209 A3	3145 A1	5104 D2
2210 A3	3146 D1	5105 C2
2211 A3	3147 E2	5106 C2
2212 A3	3148 E2	5107 C2
2213 E2	3151 C3	5108 B3
2214 E2	3152 C3	5109 D2
2215 A2	3153 C3	5110 B3
2216 B3	3155 C3	5150 C3
2217 D3	3156 D3	5151 D3
2218 D3	3157 E1	5152 D2
2219 D3	3158 C3	5201 A2
2220 D3	3159 E3	5202 A3
2221 E3	3160 C3	5251 E2
2222 E3	3161 E3	5252 E2
2223 E3	3162 D2	6102 B3
2224 E3	3163 C3	6103 B1
2225 D3	3164 E3	6106 B3
2226 E2	3165 D3	6107 B3
2227 A3	3166 E3	6150 D3
2228 A3	3168 E2	6151 C3
2229 A1	3169 C3	6160 B2
2230 D3	3170 D3	6161 C1
2233 E2	3171 D3	6162 C1
2235 A1	3172 D3	6163 C1
2236 A3	3173 D3	6200 D3
2237 A2	3174 D2	6201 C4
2250 C1	3175 E3	6202 E4
2251 C1	3176 A1	6250 C1
2252 C1	3177 A1	6251 E1
2253 D1	3178 A1	7100 B3
2254 D1	3198 A3	7101 A2
2255 C1	3199 A3	7102 A3
2256 E1	3200 A3	7103 B3
2257 E2	3202 E3	7104 E3
2258 E2	3203 E3	7105 C1
2259 E2	3204 E3	7106 A1
2260 D2	3205 D3	7107 A3
2261 D2	3206 D3	7108 E1
2262 E2	3207 E3	7109 A3
2265 E2	3208 D3	7110 B2
2266 D2	3209 D3	7111 B2
2267 D3	3210 E3	7112 A2
2268 D2	3211 D3	7113 B2
2269 E2	3212 D3	7116 C3
2270 C2	3213 E3	7117 B1
2271 C2	3214 E3	7119 C3
2272 C2	3215 E3	7120 C3
2273 A2	3216 D3	7121 C3
2274 B3	3217 E2	7122 D3
2275 B3	3218 E3	7123 D3
2276 B3	3220 A4	7124 D3
2277 D1	3221 A4	7125 D2
3000 A2	3222 A3	7156 D1
3001 A2	3223 A4	7157 E3
3100 C1	3224 A3	7158 B3
3101 C1	3225 A3	7159 C3
3102 D1	3226 A3	7160 C3
3103 E1	3227 A3	7200 A3
3104 E2	3228 E3	7201 A2
3106 A2	3230 A1	7202 A2
3107 A2	3231 A1	7203 E3
3108 A2	3232 A2	7204 B3
3109 A2	3251 C1	7205 B3
3110 B3	3252 C1	7206 B3
3111 B3	3253 C1	7207 B1
3112 B2	3254 C1	7209 E1
3113 B3	3255 C1	7210 C3
3114 B3	3256 C3	7211 C3
3115 B2	3260 D1	7212 C3
3119 B3	3261 E1	7213 D3
3120 B3	3262 E2	7214 D2
3121 B3	3263 C1	7215 D2
3122 B3	3264 C1	7216 D2
3123 C3	3265 C1	7217 D1
3124 C3	3266 C1	7218 B3
3125 C3	3267 C1	7250 C2
3126 C3	3270 C1	7251 C2
3127 C3	3271 C1	7252 C2
3128 A3	3272 C1	7253 C1
3129 B3	3273 C1	7254 D1
3130 A3	3274 E4	7255 D3
3131 B1	3275 B3	
3132 B1	3276 B3	
3133 B1	3277 C1	
3134 B1	3278 B3	
3135 B1	3279 B2	
3136 C3	3280 B2	

H20 E1	2110 B3	2131 E2	2153 C3	2173 D2
H21 E2	2111 C3	2133 E3	2154 D3	2174 D2
H22 E3	2112 C3	2134 E3	2155 E3	2175 D1
1100 B1	2113 B1	2135 E3	2156 D3	2176 C2
1200 A2	2114 B1	2136 E3	2157 D3	2177 C3
2100 E1	2115 B1	2137 E4	2158 D3	2178 D3
2101 E1	2116 B1	2138 E2	2159 E3	2179 D2
2102 B2	2117 B1	2139 E2	2160 E2	2180 D1
2103 B2	2118 B1	2140 E2	2161 D2	2181 A1
2104 A2	2119 B1	2141 E1	2162 D3	2182 E2
2105 B3	2120 D3	2142 E1	2163 D3	2183 E2
2106 B3	2121 B2	2143 E1	2164 C1	2184 E1
2107 B3	2122 B3	2144 E1	2165 A2	2185 B2
2108 C3	2123 E1	2146 E1	2166 C3	2186 B2
2109 C3	2124 C3	2147 C3	2167 C3	2187 B1
	2125 E2	2148 D3	2168 D3	2188 B2
	2126 B3	2149 E2	2169 C3	2189 B3
	2127 C3	2150 E3	2170 C3	2198 A2
	2128 B1	2151 C3	2171 D3	2199 C3
	2130 E3	2152 C3	2172 D2	2200 A3





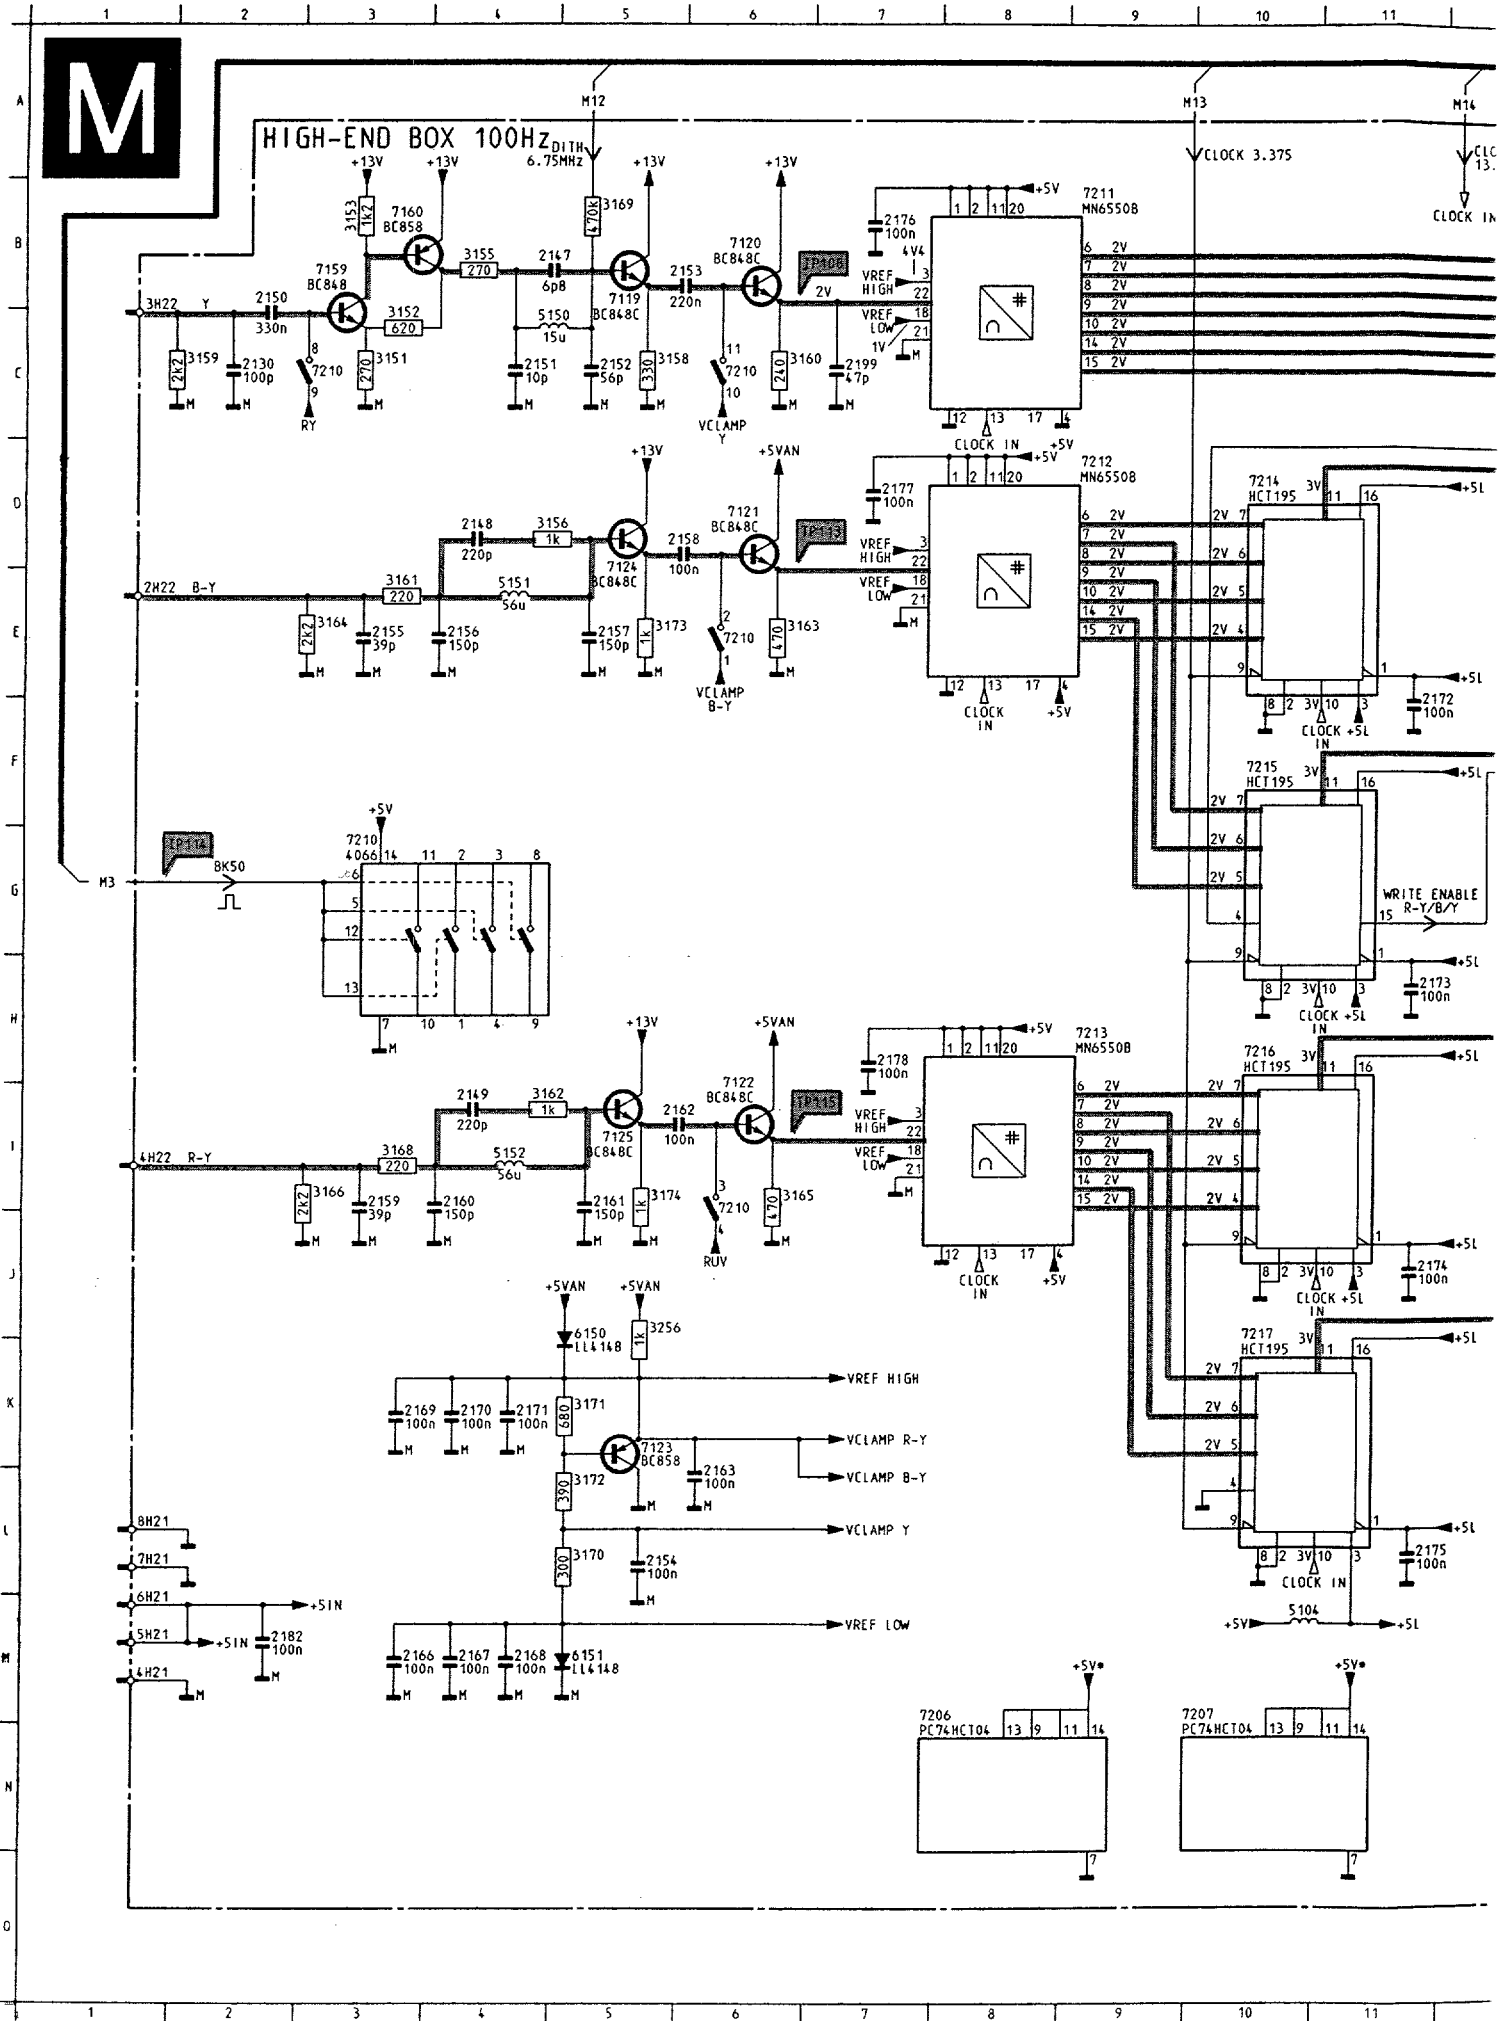


11 12 13 14 15 16 17 18 19 20 21 22


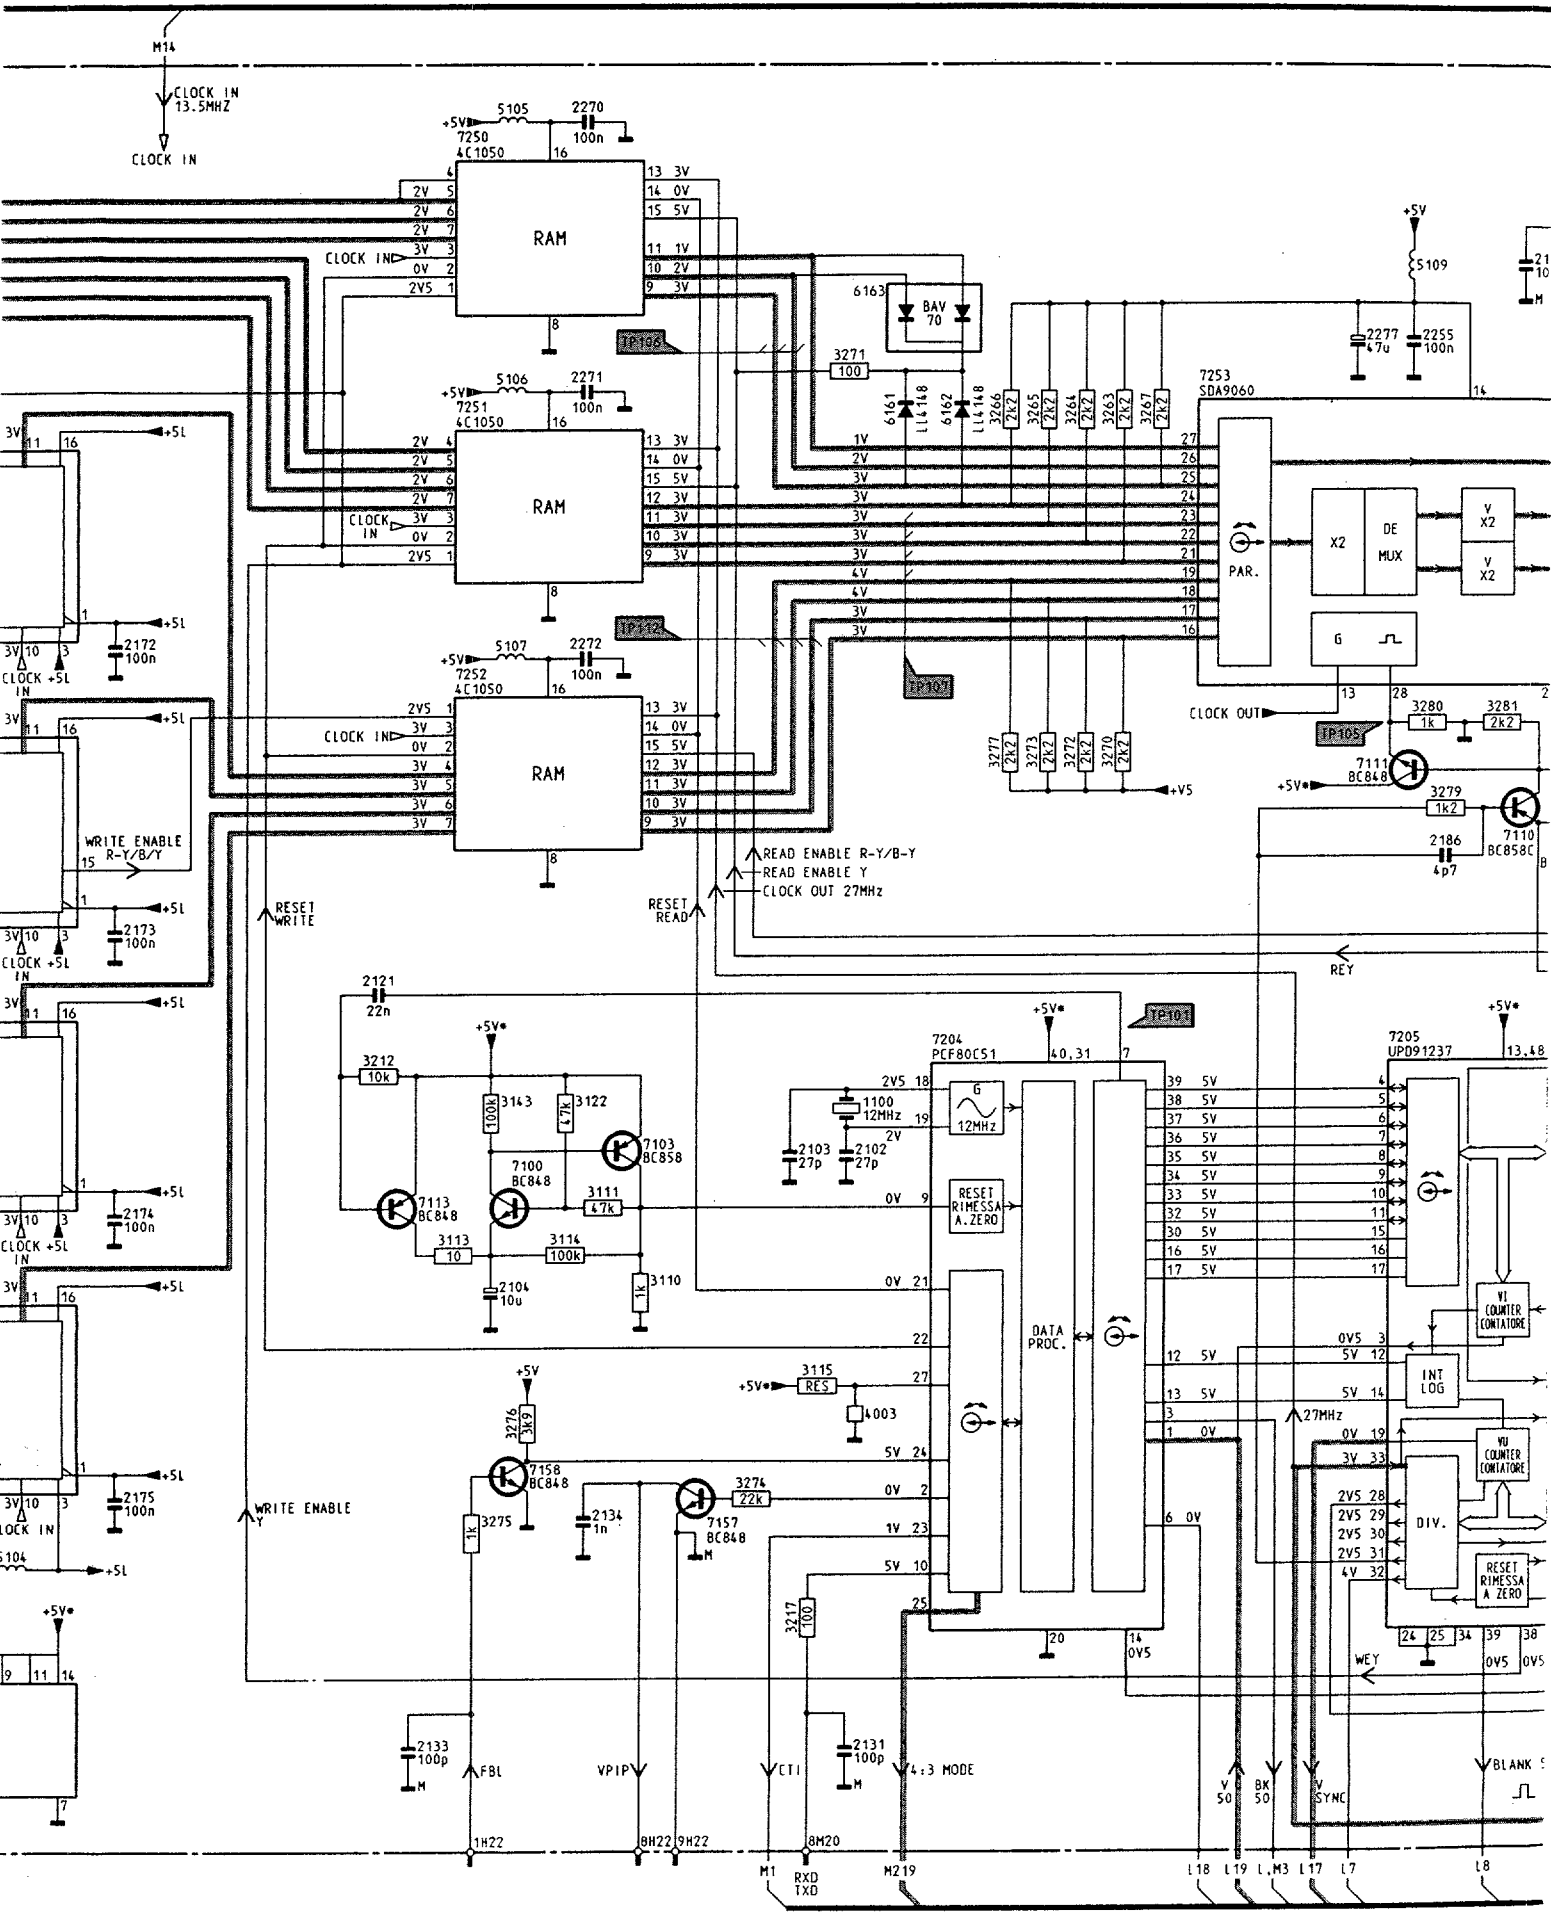


11 12 13 14 15 16 17 18 19 20 21 22

22 23 24 25 26 27 28 29 30 31 32 33

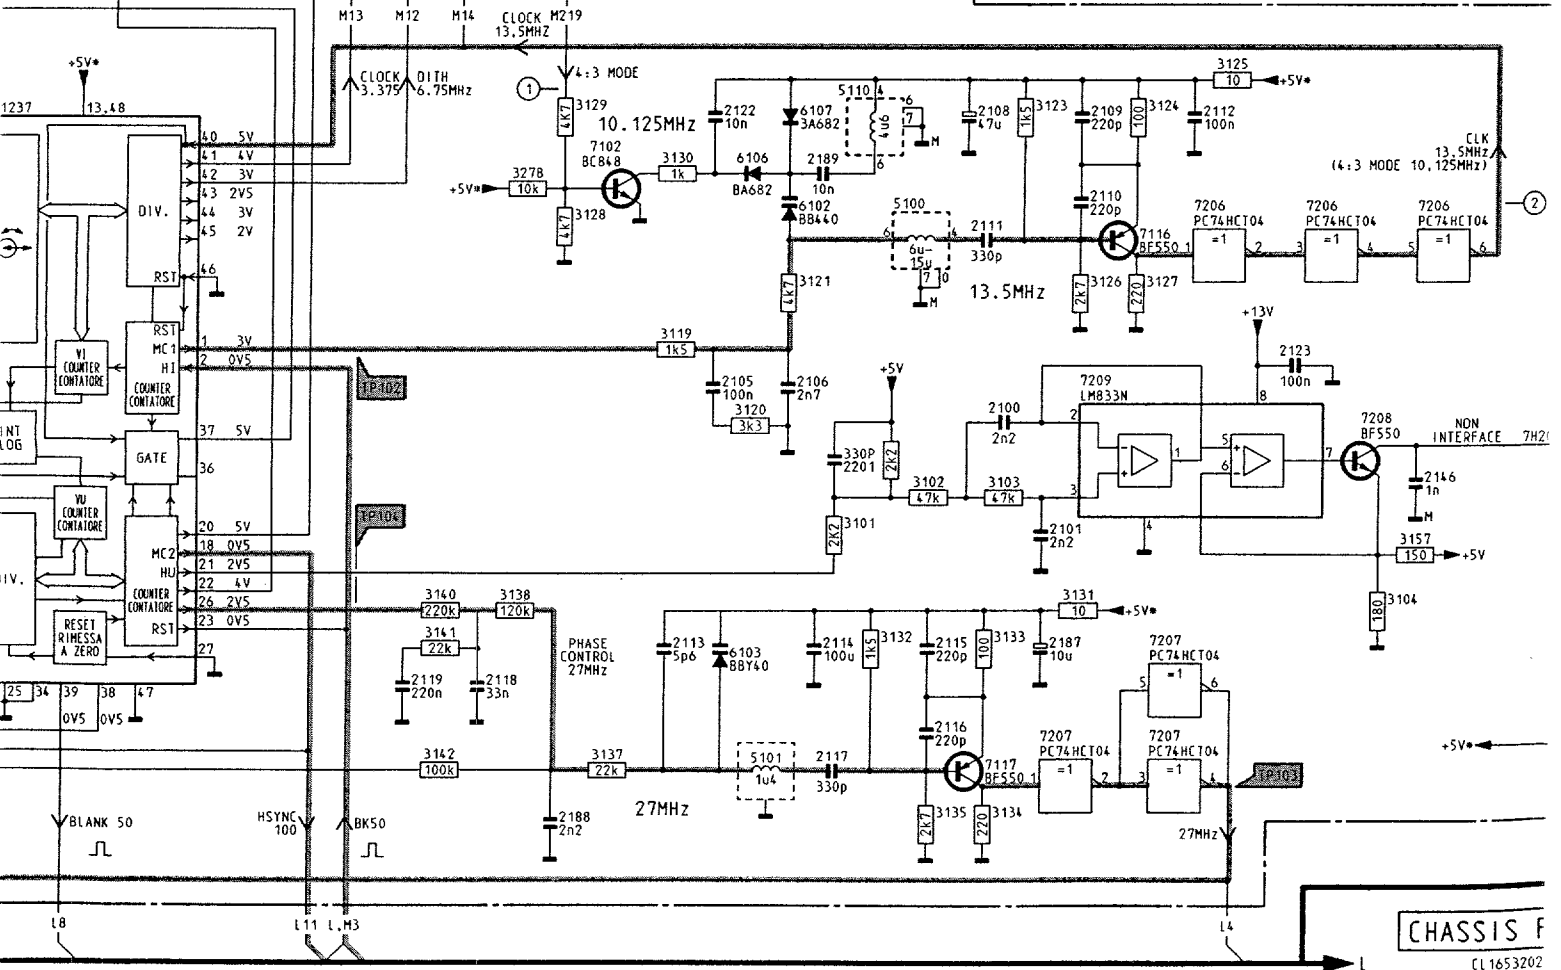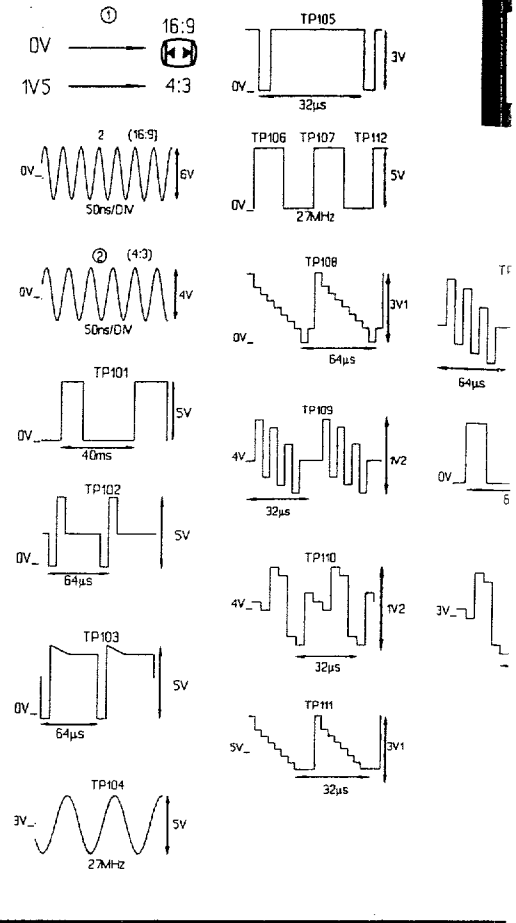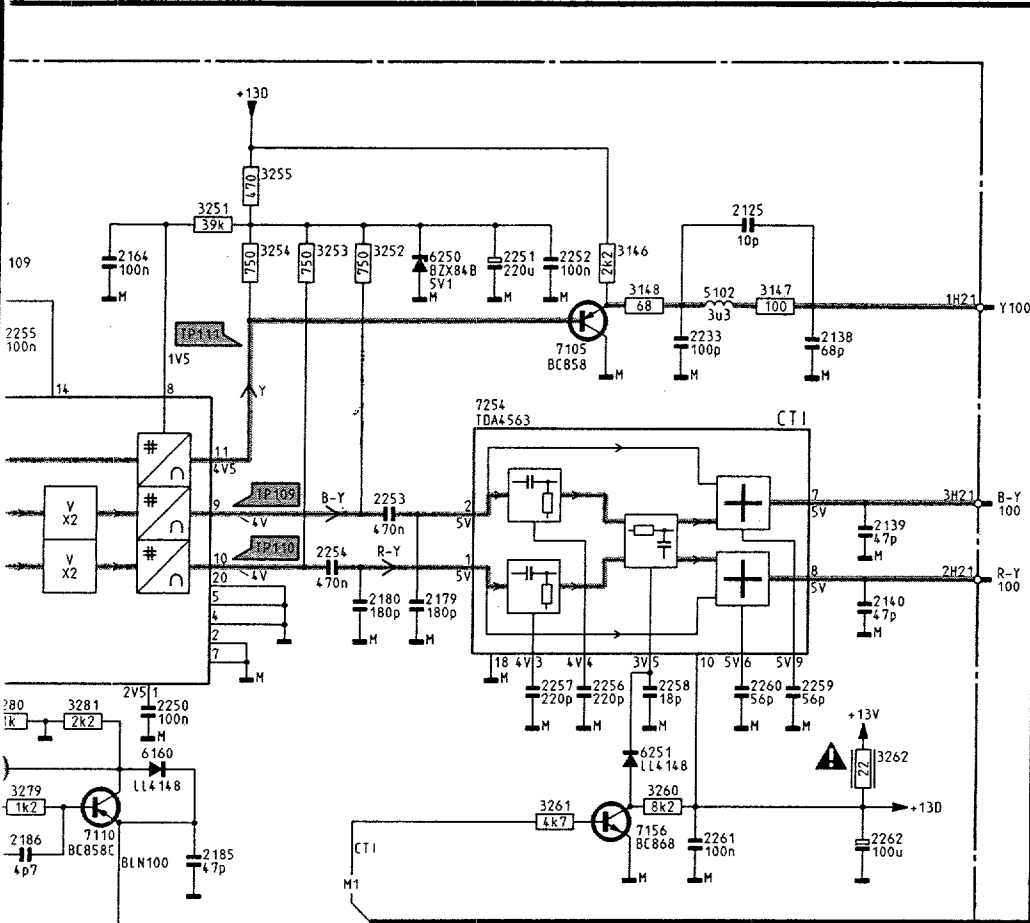

CHASSIS F  
CL1653202

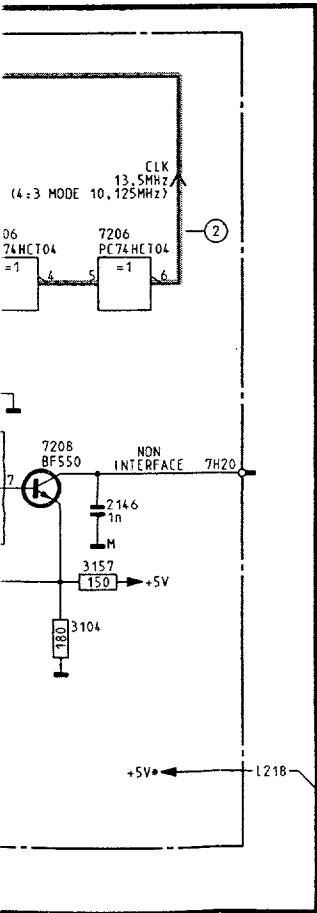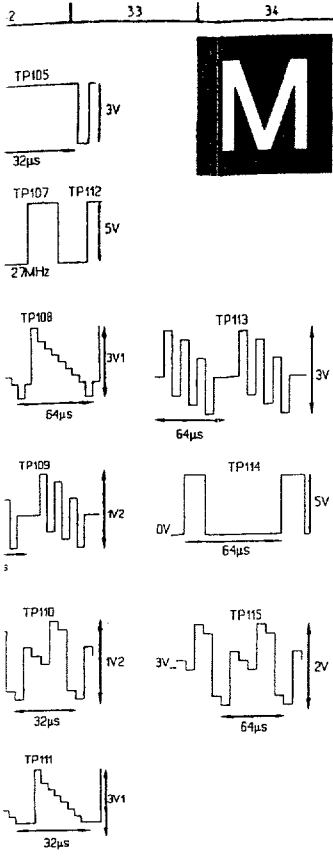

CHASSIS FL1.2  
 C1 16532023/022, MREF 270691

1100	I17	3135	N29	7208	K32
2100	K29	3137	N26	7209	K30
2101	L30	3138	M26	7210	C 3
2102	J17	3140	M25	7210	C 6
2103	J17	3141	M25	7210	E 6
2104	K14	3142	M25	7210	I 6
2105	K27	3143	I14	7210	G 3
2106	K28	3146	B26	7211	B 9
2108	I29	3147	C28	7212	D 9
2109	I30	3148	C27	7213	H 9
2110	I30	3151	C 3	7214	D10
2111	J29	3152	C 3	7215	F10
2112	I31	3153	B 3	7216	H10
2113	M27	3155	B 4	7217	K10
2114	M28	3156	D 4	7250	B14
2115	M29	3157	L33	7251	D14
2116	N29	3158	C 5	7252	F14
2117	N28	3159	C 2	7253	D20
2118	M25	3160	C 6	7254	D25
2119	M25	3161	E 3		
2121	H13	3162	I 4		
2122	I27	3163	E 6		
2123	K32	3164	E 3		
2125	B27	3165	I 6		
2130	C 2	3166	I 3		
2131	M17	3168	I 3		
2133	N14	3169	B 5		
2134	L15	3170	L 5		
2138	C28	3171	K 5		
2139	E28	3172	L 5		
2140	E28	3173	E 5		
2146	L33	3174	I 5		
2147	B 4	3212	I13		
2148	D 4	3217	M17		
2149	I 4	3251	B23		
2150	B 2	3252	B24		
2151	C 4	3253	B24		
2152	C 5	3254	B24		
2153	B 5	3255	B24		
2154	L 5	3256	J 5		
2155	E 3	3260	G27		
2156	E 4	3261	G26		
2157	E 5	3262	F28		
2158	D 5	3263	D19		
2159	I 3	3264	D19		
2160	I 4	3265	D18		
2161	I 5	3266	D18		
2162	I 5	3267	D19		
2163	L 6	3270	F19		
2164	C22	3271	C17		
2166	M 3	3272	F19		
2167	M 4	3273	F18		
2168	M 4	3274	L16		
2169	K 3	3275	L14		
2170	K 4	3276	L14		
2171	K 4	3277	F18		
2172	F11	3278	I26		
2173	H11	3279	G22		
2174	J11	3280	F22		
2175	L11	3281	F22		
2176	B 7	4003	L17		
2177	D 7	5100	J29		
2178	H 7	5101	N28		
2179	E25	5102	C27		
2180	E24	5104	M10		
2182	H 2	5105	A14		
2185	G23	5106	D14		
2186	G22	5107	F14		
2187	M30	5109	C21		
2188	N26	5110	I28		
2189	I28	5150	L 4		
2199	C 7	5151	E 4		
2201	L28	5152	I 4		
2233	C27	6102	J28		
2250	F23	6103	M27		
2251	C25	6106	I27		
2252	C26	6107	I28		
2253	D25	6150	K 5		
2254	E24	6151	M 5		
2255	C22	6160	F23		
2256	F26	6161	D17		
2257	F26	6162	D18		
2258	F27	6163	C17		
2259	F28	6250	C25		
2260	F27	6251	F27		
2261	G27	7100	J14		
2262	G28	7102	I26		
2270	A15	7103	I15		
2271	D15	7105	L26		
2272	F15	7110	G22		
2277	C21	7111	G21		
3101	L28	7113	J14		
3102	L29	7116	J31		
3103	L29	7117	N29		
3104	M32	7119	B 5		
3110	J15	7120	B 6		
3111	J15	7121	D 6		
3113	J14	7122	I 6		
3114	J15	7123	K 5		
3115	K17	7124	D 5		
3119	K27	7125	I 5		
3120	K27	7156	G27		
3121	J28	7157	L16		
3122	I15	7158	L15		
3123	I30	7159	B 3		
3124	I31	7160	B 3		
3125	H31	7204	I18		
3126	J30	7205	I21		
3127	J31	7206	M 7		
3128	J26	7206	J31		
3129	I26	7206	J32		
3130	I27	7206	J33		
3131	M30	7207	M 9		
3132	M28	7207	N30		
3133	M29	7207	M31		
3134	N29	7207	N31		

## Setting cor

- \* Unless s
- \* 220 - 24
- \* Voltages
- \* tuner ea
- \* Warming
- \* For all m
- \* probe Ri

## 1. Electri panel

N.B.: All pictu  
unless s

**1.1 +141V**  
Supply t  
the main  
Connect  
Using R3  
set the s

**1.2 Focusing**  
This is s  
the DAF

**1.3 Vg2 sett**  
Supply a  
Set the c  
saturatio  
Using an  
the direc  
(fig. 7.2)  
relation  
Now adj  
aid of the  
transform

**1.4 Dynamic**  
This is s  
bottom  
adjustme

**1.5 Horizontal**  
Connect  
Supply a  
Adjust p  
straight.  
Break the

**1.6 Horizontal**  
Set using

**1.7 Picture v**  
Set using

**1.8 Vertical**  
Set using

## Setting conditions

- \* Unless stated otherwise, the supply voltage used is: 220 - 240V  $\pm$  10%; 50 - 60Hz  $\pm$  5%
- \* Voltages and oscillograms are measured in relation to tuner earth. **Never** use the cooling plates as earth.
- \* Warming-up time  $\approx$  10 minutes
- \* For all measurements it is true that:  
probe Ri > 1M $\Omega$ ; Ci < 10pF

## 1. Electrical settings on the large signal panel

**N.B.:** All picture adjustments are carried out in 16/9 mode unless specified otherwise.

### 1.1 +141V supply voltage

Supply the mains voltage; this must be isolated from the mains.

Connect a voltmeter over C2238.

Using R3371, on the SOPS DRIVE CIRCUIT (fig. 7.1) set the supply voltage to +141V  $\pm$  0.5V.

### 1.2 Focusing

This is set with the focus potentiometer (top one on the DAF transformer).

### 1.3 Vg2 setting

Supply an aerial signal.

Set the contrast to maximum and the brightness and saturation to nominal.

Using an oscilloscope set to field frequency, measure the direct voltage level of the measurement pulse (fig. 7.2) on pin 9 of IC7705, IC7706 and IC7707 in relation to earth.

Now adjust the highest voltage level found with the aid of the Vg2 potentiometer (bottom left on the DAF transformer) to 150V  $\pm$  2V.




Fig. 7.1

### 1.4 Dynamic focus

This is set with the aid of the potentiometer on the bottom right of the DAF transformer. Repeat the adjustment of the Vg2 and focus.

### 1.5 Horizontal synchronisation

Connect point 5-IC7400 to point 9-IC7400.

Supply an aerial signal and set the receiver.

Adjust potentiometer R3406 until the picture is straight.

Break the through connection.

### 1.6 Horizontal centring

Set using potentiometer R3513.

### 1.7 Picture width

Set using potentiometer R3607.

### 1.8 Vertical centring

Set using potentiometer R3467.


### 1.9 Picture height

Movie expand off: set using potentiometer R3410.

Movie expand on: set using potentiometer R3422.

### 1.10 East/West correction

Movie expand on: set using potentiometer R3602.

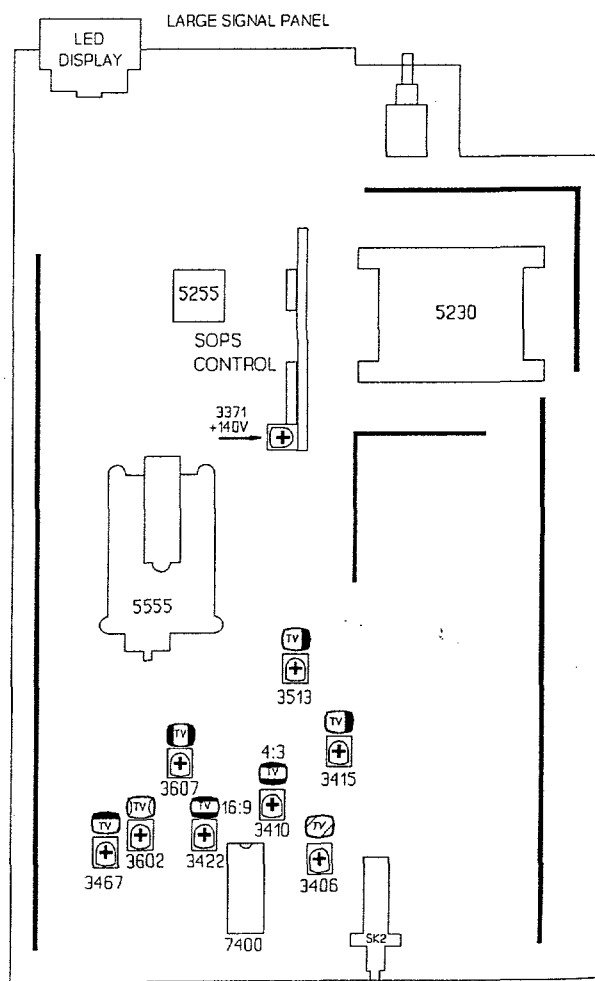

## 2. Electrical settings on the small signal panel

r R3410.  
r R3422.

### 2.1 Stereo audio channel separation

r R3602.

Connect a signal generator with a 2 carrier stereo signal ("stereo" mode).

Select 1kHz for the right-hand channel and switch off the sound for the left-hand channel.

Connect an oscilloscope to pin 3 of Euroconnector EXT1

Using R3602 on the small signal panel, set the amplitude of the signal to minimum amplitude.

### 2.2 4.43 MHz chroma suppression circuit

Supply a colour bar signal. Connect an oscilloscope to point 17 of IC7324 and set L5305 to minimum amplitude of the chrominance signal.

### 2.3a Electrical settings for sets with IC7364 - TDA4510

#### a-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.43 MHz. Connect the unit to EXT1. Connect an oscilloscope to pin 9-IC7364.

Set L5354 to maximum amplitude.

#### a-2 Chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7364 (TDA4510) to earth. Set C2380 so that the colour on the screen has practically stopped. Remove the interconnection.

### 2.3b Electrical settings for sets with IC7365 - TDA4650

#### b-1 Chroma bandpassfilter

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.286 MHz/0.2 Vpp. Switch the unit to EXT1. Connect pin 27-IC7365 to pin 13-IC7365 (+12V). Connect an oscilloscope to pin 15-IC7365.

Set L5345 to maximum amplitude.

Remove the interconnection.

#### b-2 4.50 MHz NTSC sound suppression

Connect a generator to point 20 of Euroconnector EXT1 with a frequency of 4.50 MHz and 200mV<sub>rms</sub>.

Connect point 26-IC7365 to point 13-IC7365.

Connect an oscilloscope to point 15 of IC7365.

Set L5346 to minimum amplitude.

Remove the short circuit.

#### b-3 6.50 MHz SECAM DK sound suppression

Connect a sine-wave generator to point 20 of Euroconnector EXT1 with a frequency of 6.50 MHz and 200mV<sub>rms</sub>.

Connect point 28-IC7365 to point 13-IC7365.

Connect an oscilloscope to point 15 of IC7365.

Set L5346 to minimum amplitude.

Remove the short circuit.

#### b-4 Chroma 8,87 MHz auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set C2380 so that the colour on the screen has practically stopped. Remove the interconnection.


#### b-5 Chroma 7,16 MHz auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set R2379 so that the colour on the screen has practically stopped. Remove the interconnection.

#### b-6 SECAM demodulators

Connect a pattern generator and supply a SECAM black pattern. Connect an oscilloscope to pin 3-IC7365. Set L5370 to minimum amplitude.

Connect the oscilloscope to pin 1-IC7365. Set R3370 to minimum amplitude.

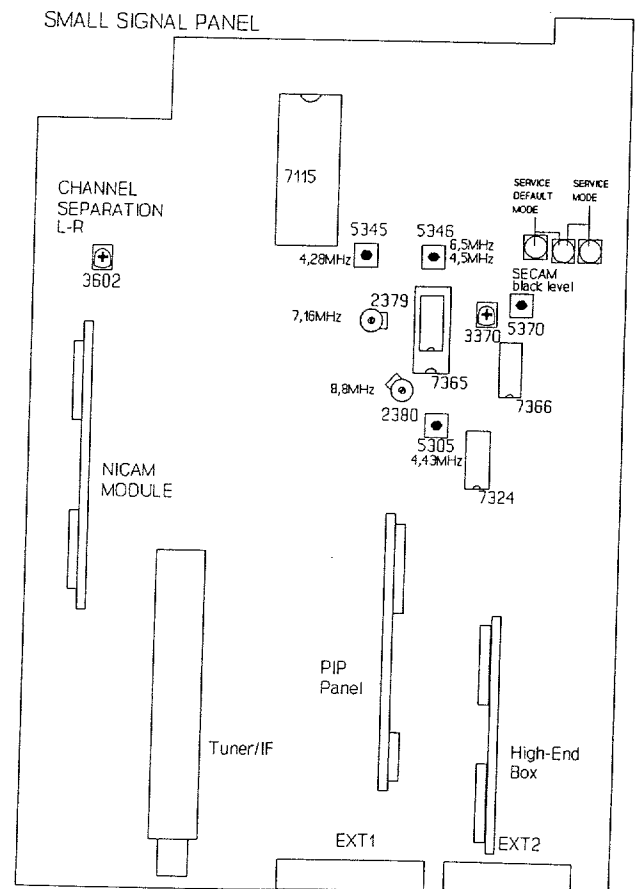

# Electrical adjustments

## 3. Electrical adjustments on the high-end box

**3.1 Synchronisation**  
 Connect point 5 of IC7203 to earth. Adjust R3228 until the picture is straight. Remove the short circuit.

**3.2 13.5 MHz oscillator**  
 Measure the signals at point 1 of IC7205 and at point 5 of IC7203 simultaneously with an oscilloscope (fig. 7.2). Adjust coil L5100 so that the positive-going flank of the signal at point 1 of IC7205 comes 7.62  $\mu$ sec after the negative-going flank of the sync pulse in the video signal (point 5 of IC7203).

**3.3 27 MHz oscillator**  
 Apply a PAL/SECAM signal. Short pin 28 of IC7204 to earth. Measure the frequency at point 6 of IC7207. Using L5101 set the frequency to 27 MHz  $\pm$  50 kHz.

**3.4 10.125 MHz oscillator**  
 Switch on compress. Measure the signals on point 1 of IC7205 and on point 5 of IC7203 simultaneously with an oscilloscope (fig. 7.2). Adjust coil L5110 so that the rising flank of the signal on point 1 of IC7205 comes 7.62  $\mu$ sec after the negative flank of the sync pulse in the video signal (point 5 of IC7203).

## 4. Electrical settings on the NICAM decoder panel

**4.1 The NICAM demodulator**  
 Supply an aerial or generator signal which has a NICAM audio signal. Connect the X-input of the oscilloscope to pin 19-IC7110. Connect the Y-input of the oscilloscope to pin 20-IC7110. Set the oscilloscope to the X-Y position. Set the sensitivity of the oscilloscope to 1V/div AC. Set the X and Y position so that the cross pattern is in the centre of the oscilloscope picture. Set C2117 on a straight cross pattern (see fig. 7.3).

**4.2 The "Sample" clock oscillator**  
 Supply an aerial or generator signal which has a NICAM audio signal. Connect an oscilloscope to pin 9-IC7150. Set the sensitivity of the oscilloscope to 1V/div and the time base to 2 $\mu$ s/div. Set C2155 so that a symmetrical block wave is visible.




Fig. 7.2







Fig. 7.3

MDA.01468 T28/826

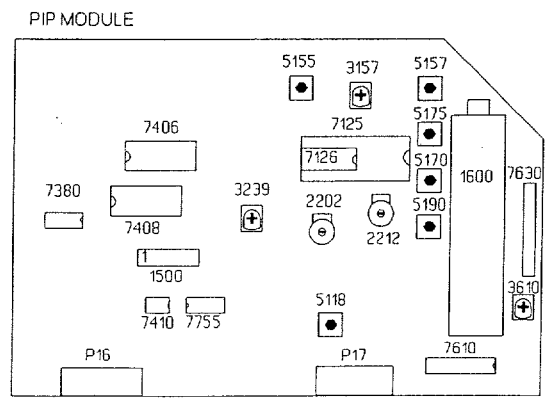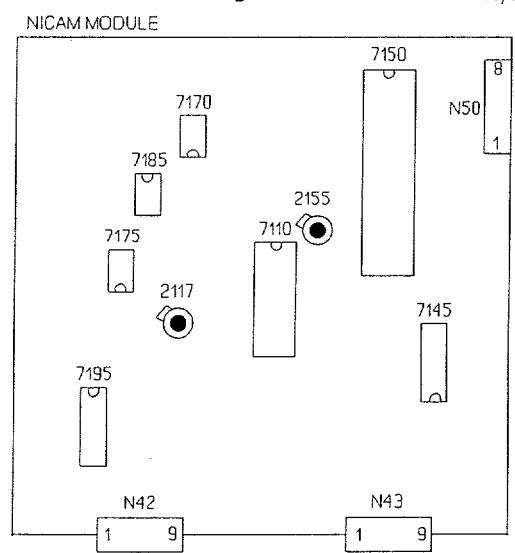

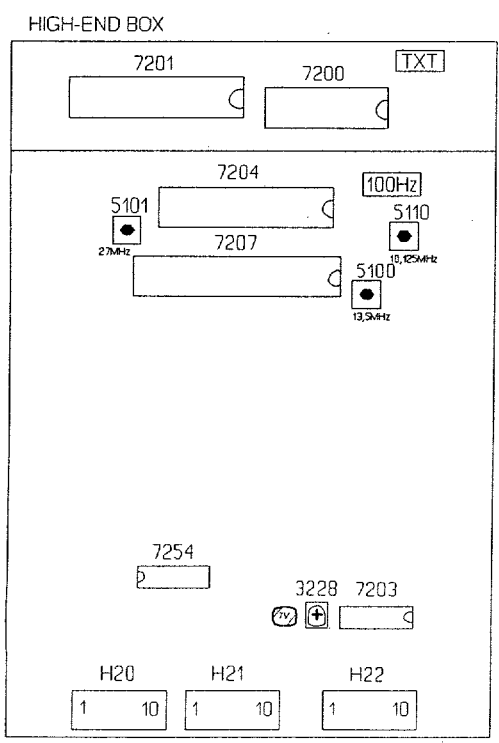

## 5. Electrical settings on the PIP panel

Before carrying out each setting, it should be ensured that a P.I.P. picture with colour bar is visible on the screen and the unit should have reached its operating temperature (after  $\approx 20$  min.).

### 5.1 Horizontal synchronisation

Supply an aerial or generator signal.  
Connect pin 28-IC7125 to pin 13-IC7125.  
Connect pin 5-IC7755 to earth.  
Measure the frequency on pin 17-IC7755 and set this to  $15,625 \text{ Hz} \pm 25 \text{ Hz}$  with R3239.  
Remove the short circuits.

### 5.2 Adjustment of PLL circuit

Connect a pattern generator and apply a PAL colour bar pattern to the CVBS input.

#### 5.2.1 Adjustment of the PLL oscillator

Movie expand      off  
Main picture      16:9  
PIP-picture      16:9

With the aid of L5101 on the PLL PCB set the DC level on pin 5 of 1500 to 2.5V.

#### 5.2.2 Adjustment of the duty cycle

Movie expand      off  
Main picture      16:9  
PIP-picture      4:3

Connect an oscilloscope to pin 11 of IC7408 (SDA9088).

With the aid of R3130 on the PLL PCB set the time T to 13nsec (see fig. 7.4).




Fig. 7.4

### 5.3 AGC

If the picture from a strong local transmitter is distorted, adjust 3160 until the picture is not distorted.

### 5.4a Setting for PIP modules with TDA4510

#### a-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to  $4.43 \text{ MHz}/0.2 \text{ Vpp}$ .  
Connect an oscilloscope to pin 9-IC7126.  
Set L5118 to maximum amplitude.

#### a-2 PAL chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7126 (TDA4510) to earth.  
Set C2202 so that the colour of the PIP picture is practically still.  
Remove the interconnection.

#### a-3 The delayline

Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7126 (TDA4510). Connect the Y-input of the oscilloscope to 2-IC7126 (TDA4510). Set the oscilloscope to the X-Y position.  
Set L5155 and L5157 so that the vectors lie in one

line (points which are furthest from the origin).

Set the pattern generator to the "DEM" mode.

Set R3157 so that the vectors lie on top of one another in the origin.

### 5.4b Setting for PIP modules with TDA4554

#### b-1 Chroma bandpass filter

Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to  $4.286 \text{ MHz}/0.2 \text{ Vpp}$ .  
Connect pin 27-IC7125 to 13-IC7125. Connect an oscilloscope to pin 15-IC7125.  
Set L5118 to maximum amplitude.  
Remove the interconnection.

#### b-2 PAL chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7125 (TDA4554) to earth.  
Set C2202 so that the colour of the PIP picture is practically still.  
Remove the interconnection.

#### b-3 NTSC chroma auxiliary oscillator

Connect a pattern generator and supply an NTSC M colour bar pattern. Connect pin 17-IC7125 to earth.  
Set C2212 so that the colour of the PIP picture is practically still.  
Remove the interconnection.

#### b-4 The delay line

Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7125 (TDA4554). Connect the Y-input of the oscilloscope to pin 3-IC7125 (TDA4554). Set the oscilloscope to the X-Y position.  
Set L5155 and L5157 so that the vectors lie in one line (points which are furthest from the origin).  
Set the pattern generator to the "DEM" mode.  
Set R3157 so that the vectors lie on top of one another in the origin.

#### b-5 SECAM identification

Connect a pattern generator and supply a SECAM colour bar signal.  
Connect pin 27-IC7125 to pin 13-IC7125.  
Connect an oscilloscope to pin 21-IC7125.  
Adjust L5190 to maximum DC level.  
Remove the interconnection.

#### b-6 SECAM demodulators

Connect a pattern generator and supply a SECAM signal without contents (black). Connect pin 27-IC7125 to pin 13-IC7125. Connect an oscilloscope to pin 1-IC7125. Using L5175, set the DC level during the scan equal to the DC level during the flyback.  
In the same way set L5170, but now measure at pin 3-IC7125.  
Remove the interconnection.

6.

6.1

6.2

## 6. Adjustments in the service menu

Switch in the service menu by connecting pins S23 and S24 on the small-signal panel briefly with each other (see section 9).

In the Service Mode the following menu appears in the picture:

```
SERVICE YY-MM-DD
a option 1 xxx
b option 2 xxx
c green   xxx
d blue   xxx
```

In this menu "YY-MM-DD" is the release date of the software which is present in the set. The desired adjustment can be selected with the aid of menu keys a, b or c on the remote control.

When the "PP store" key on the local keyboard is pressed, the adjusted values are stored in the memory and the Service Mode is left.

### 6.1 White balance

Connect a pattern generator and choose a white picture.

- Select c (green) or d (blue)
- Using P +/- adjust the values of green ("GREEN") and blue ("BLUE") until the desired white balance has been reached.

Store the selected value by pressing the "PP store" key on the local keyboard.

### 6.2 Options

The control unit used in this set has been prepared for operation of all the functions possible with this set. For correct operation, however, the control unit has to "know" the functions/features located in the set. This is done with a so-called option code.

A number is allocated to each function. The possible functions are shown with their respective numbers in the tables alongside.

#### Optioncode 1

The numbers of the functions shown in the table have to be added to each other. The total forms the number for option code 1.

For example, a set has:

Function	Number
Front-end FQ618/ME/IF	2
A PIP module	8
A NICAM module	64

Optioncode 1 now becomes 74

#### Option code 2

The number of the functions shown in the table have to be added to each other. The total forms the number for option code 2.

For example, a set has:

Function	Number
100 Hz high-end box	4
Scandinavian languages	8

Option code 2 now becomes 12

The option codes are set as follows:

- Select a: option 1
- Using P +/- set the desired option number.
- Store the value chosen by pressing the "PP store" key on the local keyboard.

These option codes are software adaptations. If the set has to be equipped for these features, the necessary hardware has also to be fitted.

Optioncode 1	
Nbr.	Function
0	<b>Front end = FE816/IF</b> A reception of PAL BG or PAL BG and SECAM BG is now possible.
1	<b>Front end = FE844</b> Only reception of the UHF band is now possible.
2	<b>Front end = FE816/ME/IF</b> Reception of SECAM L but not of SECAM L' is now possible (reception of NTSC-M is now usually also possible).
4	<b>Front end = FE816/MF/IF</b> Reception of both SECAM L and SECAM L' is now possible (NTSC M reception is generally possible now via the Euroconnector).
8	<b>PIP module fitted</b> This makes it possible to show PIP (Picture In Picture) displays.
16	<b>NTSC-M reception possible</b> This is normally always in combination with front end FE816/ME/IF or FE816/MF/IF.
32	<b>SECAM DK module fitted</b> In this case transmissions using the SECAM DK system can also be received.
64	<b>NICAM module fitted</b> In this case the digital sound with NICAM transmission can be received. Check that the IC is used at position 7145 (PCF8574 or PCF8574A) in connection with number 16 in option code 2.
128	<b>Second front end for PIP fitted</b> If this second front end is fitted a second transmitter can be displayed in the PIP picture. The PIP function (number 8) still applies. Since IC-PCF8574A is now probably used in position 7145 on the NICAM module, number 16 in option code 2 will apply.

Optioncode 2	
Nbr.	Function
4	<b>100 Hz High-end box fitted</b> This will always be the case.
8	<b>Scandinavian languages</b> This enables the use of Scandinavian languages to be selected in the operation menus.
16	<b>NICAM with PCF8574A</b> If the PCF8574A is used instead of the PCF8574 on the NICAM panel at position 7145. This is always the case in sets with a second front end for PIP.

1. The Service Default Mode

The FL1.2 is equipped with a service default mode. The service default mode is a fixed, definite state to which the set can be switched.

1.1 Definition state

The definition of the fixed state in the service default mode is as follows:

- all sound and picture controls are in the central position (exception volume which is turned down)
- tuned to 475.25 MHz
- system:
  - \* PAL/SECAM BG for Multi Europe
  - \* PAL I for UK
  - \* SECAM L for Multi French

1.2 Switch on and off

The service default mode is switched on by shorting pins S24 and S25 on the small signal panel.

The service default mode can only be switched off by switching the set to stand-by. If the set is switched off and then on again using the mains switch or the mains plug, the service default mode will remain on.

If the set switches to stand-by immediately after switching-on, the set cannot be operated and also cannot be switched to the service default mode. The child-proof lock has already been activated. To deactivate the child-proof lock the following series of commands has to be given using the remote control (see also Section 9):

< MENU > - < BLUE > - < RED > - < MENU + > - < MENU OFF >

1.3 Fault signals

To indicate that the set is in the service default mode, the following is displayed on the screen:

SERVICE 00 00 05 06 05

The five numbers after the word "service" stand for the last five fault signals noted by the operator(s). The number on the extreme right represents the last fault signal, that on the extreme left the last fault signal but 4.


Since this enables fault reports to be looked at afterward, it means that intermittent faults can be traced.

When the set leaves the service default mode, the fault-report memory is cleared.

1.4 Operation

During the service default mode the set will accept all operating commands. When, however, the set is switched off and on, it will return to the state as defined above.

2. Software protection

If it is observed by the control that the front end has ceased to give an I<sup>2</sup>C response, or that IC7430, IC7600 and also IC 7680 are no longer giving any response, the set will switch to the protection mode since it will be assumed that the +5 V or the +13 V power-supply voltage is absent. This software protection device consists of a fault signal (LEDs , code99) and the switching of the set to stand-by. To enable the fault to be traced, the set has now to be switched to the service default mode. The software protection system is then switched out of circuit.

3. Replacement of EEPROM IC7137

If, during a repair, the EEPROM has to be replaced, the microprocessor will detect that the EEPROM is empty. A fault signal (No. 21) will then be displayed.

If the service mode is now activated (see section 7), the microprocessor will load the EEPROM with a number of standard values for the white balance and the other linear settings. These values, however, must all be checked and, if necessary, re-adjusted.

All options have also to be set, the programs installed and the personal preference set.

List of I<sup>2</sup>C Blo

ERR COD


- 01
- 02
- 04
- 05
- 06
- 07
- 09

# Faultfindingtree

t end  
that  
onger  
to the  
it the  
ge is  
sists  
d the  
e the  
ched  
ware  
rcuit.


aced,  
M is  
n be

ction  
with  
ance  
lues,  
/, re-  
rams


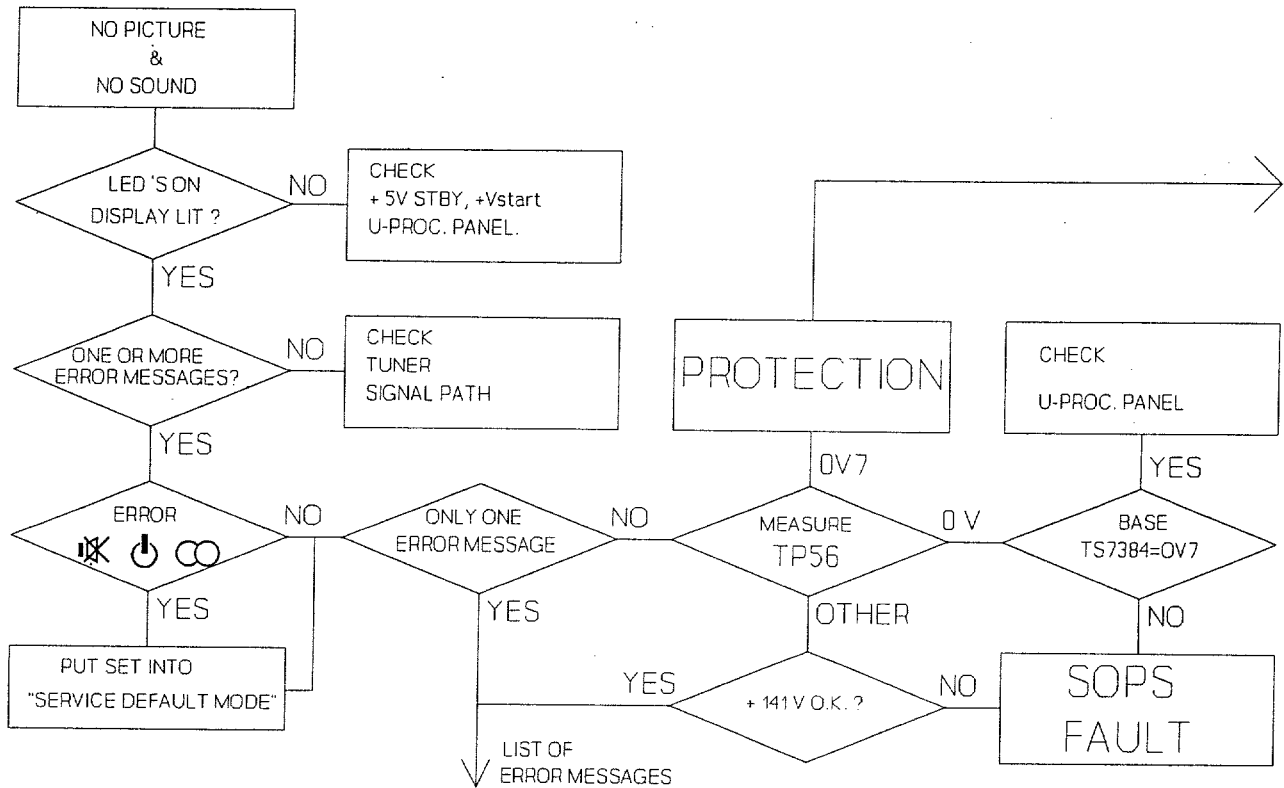


## List of error messages








### I<sup>2</sup>C Blockdiagram

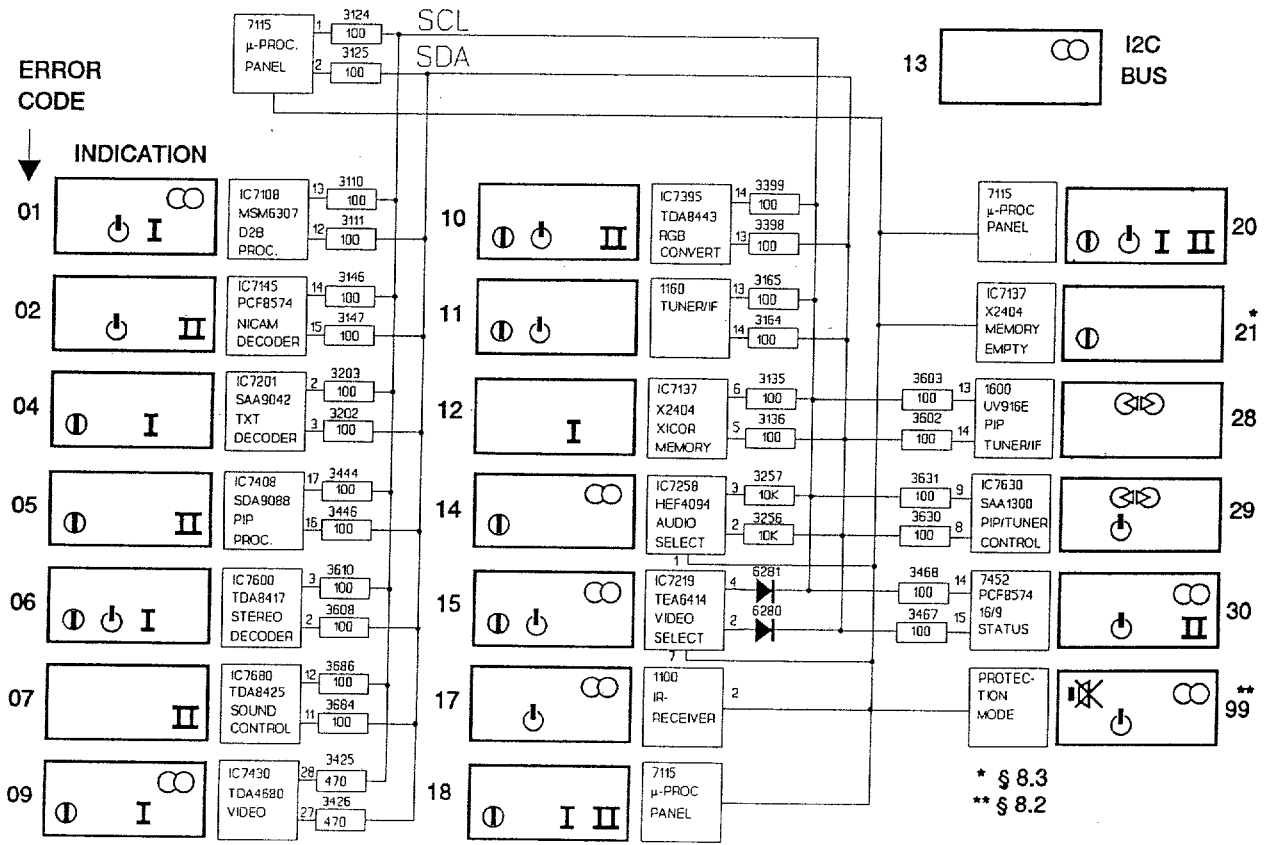



\* § 8.3  
\*\* § 8.2

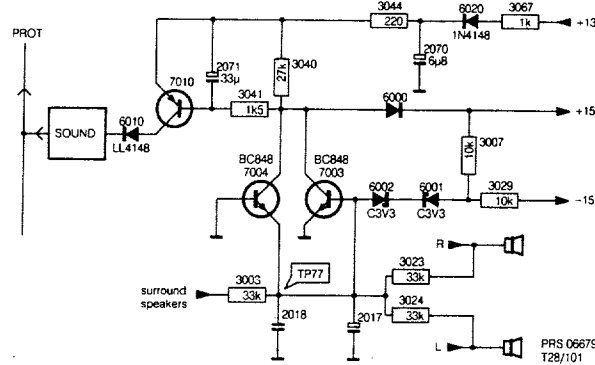

EHT

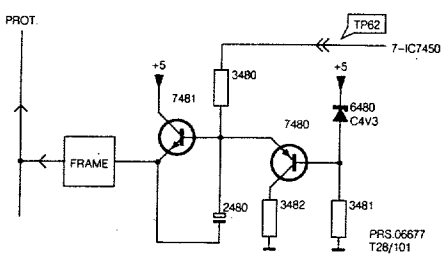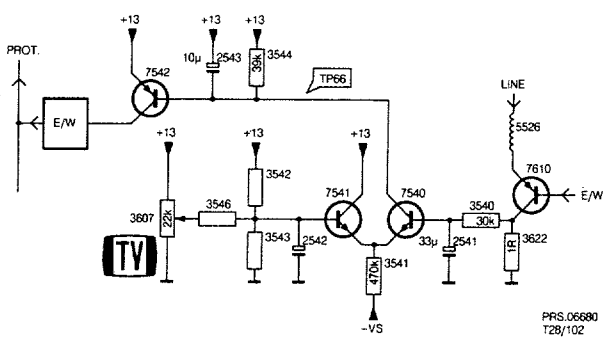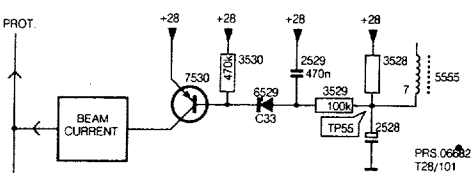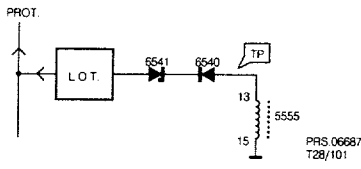

+V

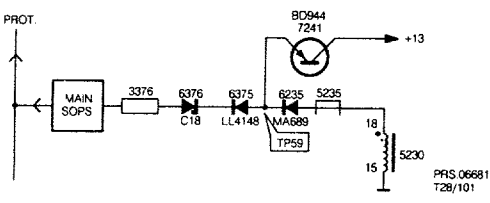

## Repair tips

### 4. Servicing of SMDs (Surface Mounted Devices)

#### 4.1 General cautions on handling and storage

- Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.
- Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity.

The capacitance or resistance value of the SMDs may be affected by this.

- Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

#### 4.2 Removal of SMDs

- Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 8.1A) or:
- While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 8.1B).
- Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 8.1C).

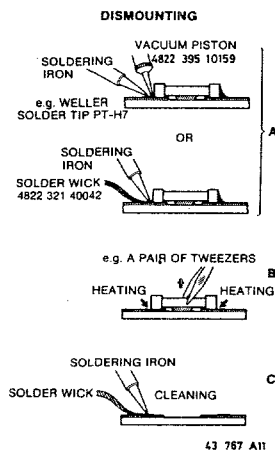


Fig. 8.1




Fig. 8.2

#### Caution on removal:

- When handling the soldering iron, use suitable pressure and be careful.
- When removing the chip, do not use undue force with the pair of tweezers.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- The chip, once removed, must never be reused.

#### 4.3 Attachment of SMDs

- Locate the SMD on the solder lands by means of tweezers and solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 8.2A).
- Next complete the soldering of the terminals of the component (see Fig. 8.2B).

#### Caution when attaching SMDs:

- When soldering the SMD terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible; care must be taken to avoid damage to the terminals of the SMDs themselves.
- Keep the SMD's body in contact with the printed board when soldering.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- Soldering should not be done outside the solder land.
- Soldering flux (of rosin) may be used, but should not be acidic.
- After soldering, let the SMD cool down gradually at room temperature.
- The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (see Fig. 8.3).


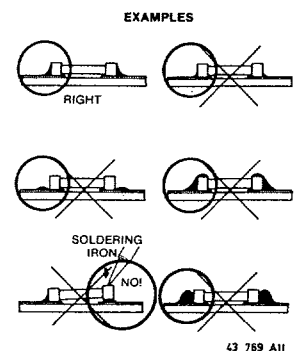


Fig. 8.3





MAIN MENU

PRESS "MENU" ON THE REMOTE CONTROL

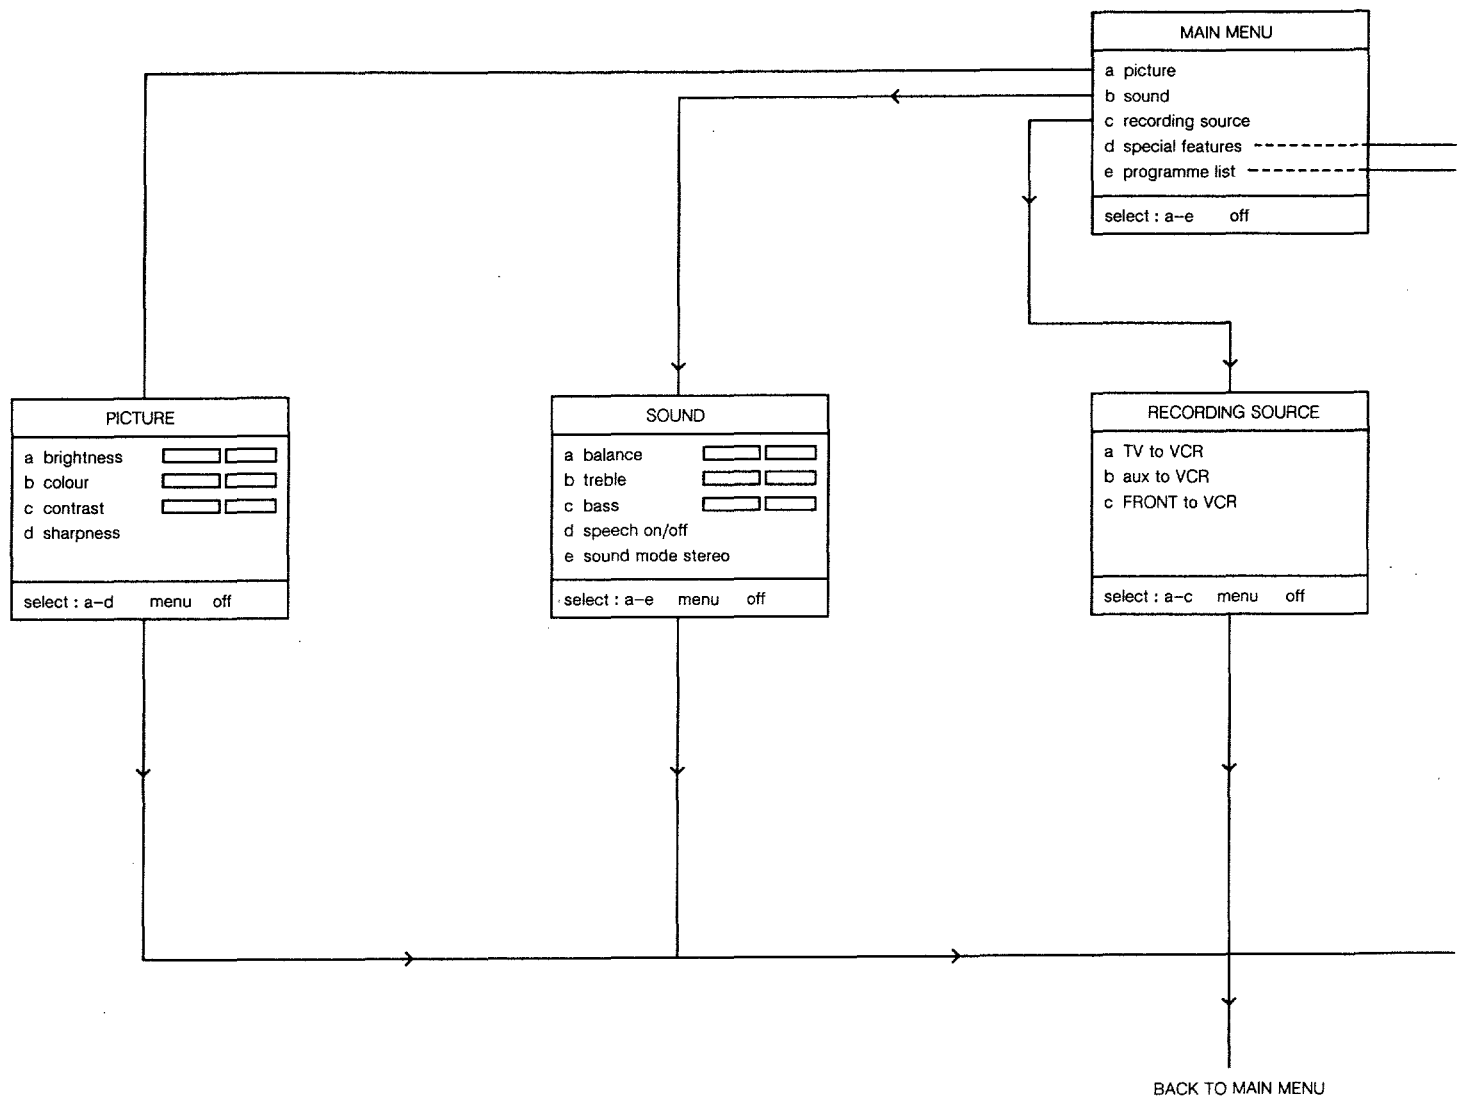

MENU


MENU ON  
E CONTROL

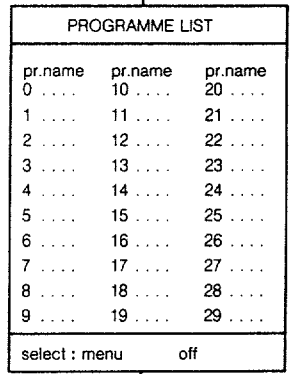

MAIN MENU

MDA 02820  
T-26/112



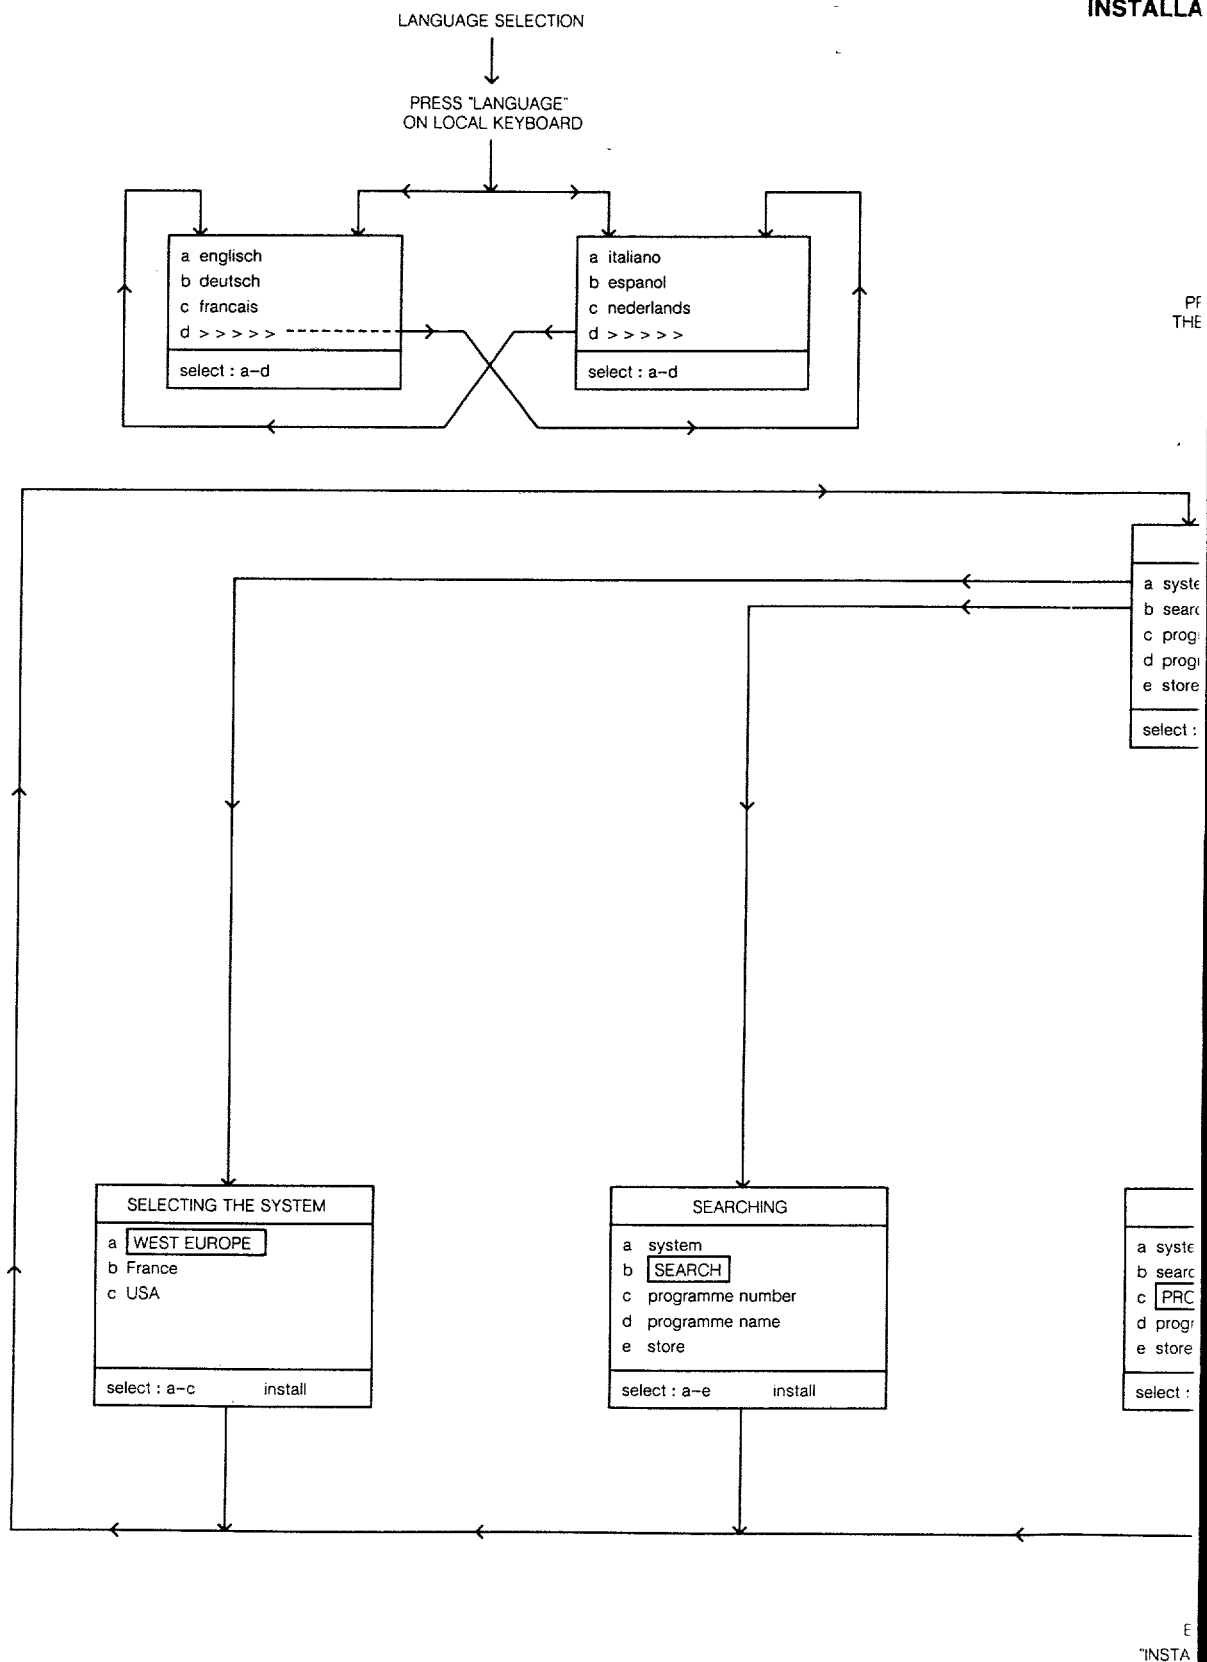

INSTALLATION OF STATIONS


PRESS "INSTALL" ON THE LOCAL KEYBOARD

INSTALLATION

- a system
- b search
- c programme number -----
- d programme name -----
- e store -----

select : a-e install

INSTALLATION OF TXT

PRESS 

ON REMOTE CONTROL

PRESS "INSTALL" ON THE CONTROL PANEL

TELETEXT PAGE MEMORY

prog.	page	prog.	page
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...
...	...	...	...

- a cursor up
- b cursor down
- c add to list
- d remove from list
- e store

select : a-e 0-9 install

NAMING THE PROGRAMME

pr. name	pr. name	pr. name
0 .....	10 .....	20 .....
1 .....	11 .....	21 .....
2 .....	12 .....	22 .....
3 .....	13 .....	23 .....
4 .....	14 .....	24 .....
5 .....	15 .....	25 .....
6 .....	16 .....	26 .....
7 .....	17 .....	27 .....
8 .....	18 .....	28 .....
9 .....	19 .....	29 .....

ABCDEFGHIJKLMN OPQRST UVVWXYZ 0123456789

- a A ← 9
- b A → 9
- c next character
- d finish

select : a-d install

INSTALLATION

- a system
- b search
- c PROGRAMME NUMBER
- d programme name
- e store


select : - + a-e install

PROGRAMME STORED

- a system
- b search
- c programme number
- d programme name
- e STORE

select : a-e install

EXIT MENU BY PRESSING "INSTALL" ON THE LOCAL KEYBOARD



Large signal panel **A B G**

4822 265 40469	6P female gold plated	2023	5322 122 33446	3,3nF 10% 63V	2365	5322 122 32838	82nF 10% 63V	2548
4822 265 40472	10P female gold plated	2024	5322 122 33446	3,3nF 10% 63V	2372	5322 121 42502	390nF 5% 63V	2548
4822 290 40295	7P male	2026	4822 122 32927	220nF	2376	4822 124 40272	33μF 20% 16V	2550
4822 265 40442	10P male	2027	4822 122 32927	220nF	2380	4822 122 33496	100nF 10% 63V	2600
4822 265 20509	2P male grey	2028	4822 122 32927	220nF	2381	4822 122 33496	100nF 10% 63V	2600
4822 267 40985	6P male	2029	4822 122 32927	220nF	2382	4822 122 33496	100nF 10% 63V	2600
4822 265 30525	2P male	2030	4822 126 11175	22pF 5% 50V	2386	5322 122 31647	1nF 10% 63V	2600
4822 264 40207	3P male	2031	4822 126 11175	22pF 5% 50V	2401	4822 122 32542	47nF 10% 63V	2610
4822 265 30389	2P male	2032	4822 122 31797	22nF 10% 63V	2402	4822 124 41577	4,7μF 20% 50V	2610
4822 265 30389	2P male	2035	4822 122 31775	680pF 5% 50V	2403	4822 124 41678	22μF 20% 25V	2610
4822 265 40596	2P male	2038	4822 122 31644	2,2nF 10% 63V	2404	4822 124 41577	4,7μF 20% 50V	2610
4822 265 20509	2P male grey	2040	4822 122 32927	220nF	2405	4822 122 32542	47nF 10% 63V	2610
4822 267 50591	6P male gold plated	2041	4822 122 32927	220nF	2406	4822 121 51091	1,2nF 2% 250V	2620
4822 264 50149	10P male gold plated	2042	4822 122 32927	220nF	2407	5322 122 31647	1nF 10% 63V	2800
4822 265 30389	2P male	2043	4822 122 32927	220nF	2408	4822 122 31172	180pF 10% 500V	2800
4822 265 30389	2P male	2044	4822 122 32927	220nF	2409	4822 122 31797	22nF 10% 63V	2800
4822 264 40207	3P male	2045	4822 122 32927	220nF	2410	4822 121 41854	150nF 5% 63V	3000
Various parts			2046	4822 122 32927	220nF	2411	4822 121 41854	150nF 5% 63V
4822 466 93029	insulating plate	2047	4822 122 32927	220nF	2412	4822 122 31173	220pF 10% 500V	3000
4822 466 92359	insulating plate	2050	4822 124 42108	33μF 20% 16V	2413	4822 122 31768	180pF 5% 50V	3000
4822 492 70143	spring for 7216	2051	4822 124 42108	33μF 20% 16V	2415	4822 122 32542	47nF 10% 63V	3000
4822 492 62076	spring for 7000 and 7001	2052	4822 124 42108	33μF 20% 16V	2416	4822 122 33496	100nF 10% 63V	3000
4822 492 70788	spring for 7011	2053	4822 124 42108	33μF 20% 16V	2417	4822 122 32808	1,2nF 10% 63V	3000
4822 492 70789	spring fix transistor	2056	4822 122 31773	560pF 5% 50V	2418	4822 122 31797	22nF 10% 63V	3000
4822 492 70789	spring fix transistor	2057	4822 122 31773	560pF 5% 50V	2419	4822 124 40849	330μF 20% 16V	3000
4822 492 70789	spring fix transistor	2058	4822 122 31773	560pF 5% 50V	2450	4822 122 32442	10nF 50V	3010
4822 492 70789	spring fix transistor	2059	4822 122 31773	560pF 5% 50V	2451	4822 122 31746	1000pF 5% 50V	3010
4822 492 70789	spring fix transistor	2060	4822 122 32142	270pF 5% 63V	2452	4822 124 41716	220μF 20% 35V	3010
4822 492 70789	spring fix transistor	2061	4822 122 32142	270pF 5% 63V	2455	4822 122 31746	1000pF 5% 50V	3010
4822 492 70789	spring fix transistor	2065	4822 126 11156	684nF 20%	2456	4822 124 42264	4700μF 20% 25V	3010
4822 492 70789	spring fix transistor	2066	4822 126 11156	684nF 20%	2457	4822 124 42249	2,2μF 10% 50V	3020
4822 492 70789	spring fix transistor	2070	4822 124 40272	33μF 20% 16V	2458	4822 122 31797	2,2nF 10% 63V	3020
4822 492 70789	spring fix transistor	2071	4822 124 42184	33μF 20% 25V	2459	4822 122 32891	68nF 10% 63V	3020
4822 492 70789	spring fix transistor	2072	4822 124 40178	100μF 20% 10V	2460	4822 122 33496	100nF 10% 63V	3020
4822 492 70789	spring fix transistor	2073	4822 124 21212	15μF 20% 40V	2480	4822 124 23495	10μF 20% 25V	3020
4822 492 70789	spring fix transistor	2074	5322 122 31647	1nF 10% 63V	2502	4822 121 41689	100nF 10% 250V	3030
4822 492 70789	spring fix transistor	2200	4822 121 43819	680nF 10% 250V	2503	4822 126 11823	270pF 10% 500V	3030
4822 492 70789	spring fix transistor	2203	4822 121 40487	100nF 10% 400V	2504	4822 126 11539	1,2nF 10% 2KV	3030
4822 492 70789	spring fix transistor	2214	4822 124 23492	220μF 50% 385V	2507	4822 121 41673	220nF 10% 100V	3030
4822 492 70789	spring fix transistor	2215	4822 122 33665	3,3nF 20% 125V	2509	4822 122 40112	560pF 20% 500V	3030
4822 276 12998	mains switch	2216	4822 126 10202	1,5nF 10% 2KV	2510	4822 126 11494	2,2nF 10% 500V	3030
4822 256 30274	fuse holder	2231	4822 122 32585	470pF 10% 500V	2511	4822 124 41739	47μF 20% 160V	3030
4822 290 60812	socket for ext. loudspeakers	2232	4822 124 40738	330μF 20% 25V	2512	4822 124 40435	10μF 20% 50V	3040
4822 267 20417	socket for squeeters	2233	4822 122 32585	470pF 10% 500V	2513	4822 124 40435	10μF 20% 50V	3040
4822 276 13094	switch loudsp. ON/OFF	2234	4822 124 40738	330μF 20% 25V	2517	4822 126 11157	470pF 10% 500V	3040
1200 4822 070 33152	fuse T3.15A	2235	4822 122 32585	470pF 10% 500V	2518	4822 124 22449	4,7μF 30% 350V	3040
1250 4822 071 52501	fuse T0,25A	2237	4822 122 33708	2,2nF 10% 1KV	2519	4822 124 41831	1μF 20% 160V	3040
<b>-  -</b>			2238	4822 124 22583	47μF 160V	2520	4822 121 43397	680nF 5% 250V
2000	5322 122 33062	270pF 10% 500V	2239	4822 124 40193	68μF 20% 16V	2521	4822 121 43397	680nF 5% 250V
2001	4822 122 31784	4,7nF 10% 50V	2240	4822 124 42183	1000μF 20% 63V	2522	4822 121 43397	680nF 5% 250V
2002	4822 122 31784	4,7nF 10% 50V	2254	4822 126 11496	120pF 5% 2KV	2523	5322 121 41603	10nF 5% 2KV
2003	4822 126 11175	22pF 5% 50V	2255	4822 122 32142	270pF 5% 63V	2524	4822 121 70006	18nF 5% 630V
2008	4822 122 31797	22nF 10% 63V	2258	5322 121 42502	390nF 5% 63V	2525	4822 124 22347	47μF 20% 50V
2009	4822 126 11175	22pF 5% 50V	2260	4822 122 31727	470pF 5% 63V	2526	4822 126 11502	470pF 10% 500V
2011	4822 122 31775	680pF 5% 50V	2261	5322 124 21189	100μF 20% 40V	2527	4822 121 70005	15nF 5% 630V
2012	4822 122 32927	220nF	2262	4822 122 31727	470pF 5% 63V	2529	4822 124 23491	0,47μF 20% 50V
2013	4822 122 32927	220nF	2263	4822 124 40849	330μF 20% 16V	2530	4822 122 31797	22nF 10% 63V
2015	4822 124 42109	22μF 10% 50V	2270	4822 124 40178	100μF 20% 10V	2531	4822 121 40516	22nF 10% 250V
2016	4822 124 42109	22μF 10% 50V	2272	4822 122 33496	100nF 10% 63V	2533	5322 122 32818	2,2nF 10% 100V
2018	4822 122 31797	22nF 10% 63V	2302	4822 122 31765	100pF 5% 50V	2534	4822 126 11502	470pF 10% 500V
2019	4822 122 31414	10nF 100V	2303	4822 122 31808	150pF 10% 50V	2535	4822 124 23488	1000μF 20% 35V
2020	4822 122 31414	10nF 100V	2308	4822 122 32891	68nF 10% 63V	2536	4822 126 11157	470pF 10% 500V
2021	4822 122 31414	10nF 100V	2321	4822 121 43047	1μF 10% 63V	2537	4822 124 40184	1000μF 20% 10V
2022	4822 122 31414	10nF 100V	2331	4822 122 32891	68nF 10% 63V	2541	4822 124 42184	33μF 20% 25V
<b>-  -</b>			2351	4822 121 41854	150nF 5% 63V	2542	4822 124 22466	1μF 20% 50V
			2360	4822 122 31981	33nF + -0,5pF 50V	2543	4822 124 23495	10μF 20% 25V
			2361	4822 121 42589	82nF 5% 63V	2544	4822 124 41525	100μF 20% 25V
						2546	4822 122 33496	100nF 10% 63V

Large signal panel (continued)

% 63V  
% 63V  
% 16V  
0% 63V  
0% 63V  
0% 63V  
% 63V  
% 63V  
% 33V  
% 50V  
% 25V  
% 50V  
% 63V  
% 250V  
% 63V  
0% 500V  
% 63V  
% 63V  
% 63V  
0% 500V  
% 50V  
% 63V  
0% 63V  
% 63V  
% 63V  
% 63V  
0% 16V  
V  
5% 50V  
0% 35V  
5% 50V  
20% 25V  
% 50V  
% 63V  
% 63V  
0% 63V  
% 25V  
0% 250V  
0% 500V  
% 2KV  
0% 100V  
0% 500V  
% 500V  
% 160V  
% 50V  
% 50V  
0% 500V  
% 630V  
% 50V  
% 250V  
% 250V  
% 250V  
% 2KV  
% 630V  
% 50V  
0% 500V  
% 630V  
% 50V  
% 63V  
% 250V  
% 100V  
0% 500V  
20% 35V  
0% 500V  
20% 10V  
% 25V  
% 50V  
% 25V  
0% 25V  
0% 63V



2547	4822 122 32566	3,9nF 10% 63V
2548	4822 124 22466	1µF 20% 50V
2551	4822 124 40195	150µF 20% 16V
2600	4822 124 41577	4,7µF 20% 50V
2605	4822 122 31781	1500pF 10% 50V
2606	4822 122 31797	22nF 10% 63V
2609	5322 121 42386	100nF 5% 63V
2610	4822 124 41576	2,2µF 20% 50V
2611	4822 124 41577	4,7µF 20% 50V
2612	4822 124 41577	4,7µF 20% 50V
2613	4822 122 31784	4,7nF 10% 50V
2615	4822 122 33498	2,7nF 10% 63V
2626	4822 122 32153	1,8nF 10% 63V
2801	4822 122 32153	1,8nF 10% 63V
2805	4822 124 40435	10µF 20% 50V
2806	4822 122 31797	22nF 10% 63V



3000	4822 051 10912	9k1 2% 0,25W
3001	4822 051 10912	9k1 2% 0,25W
3004	4822 051 10104	100k 2% 0,25W
3005	4822 051 10104	100k 2% 0,25W
3006	4822 051 10204	200k 2% 0,25W
3009	4822 051 10204	200k 2% 0,25W
3011	4822 051 10203	20k 2% 0,25W
3012	4822 051 10203	20k 2% 0,25W
3013	4822 116 52268	300k 5% 0,5W
3014	4822 116 52268	300k 5% 0,5W
3016	4822 052 10828	8Ω 2% 0,33W
3021	4822 052 10828	8Ω 2% 0,33W
3022	4822 052 10828	8Ω 2% 0,33W
3027	4822 051 10103	10k 2% 0,25W
3028	4822 051 10103	10k 2% 0,25W
3029	4822 051 10123	12k 2% 0,25W
3030	4822 051 10123	12k 2% 0,25W
3031	4822 051 10102	1k 2% 0,25W
3032	4822 051 10102	1k 2% 0,25W
3033	4822 116 52244	15k 5% 0,5W
3034	4822 051 10472	4k7 2% 0,25W
3035	4822 051 10153	15k 2% 0,25W
3036	4822 051 10152	1k5 2% 0,25W
3037	4822 051 10152	1k5 2% 0,25W
3040	4822 051 10273	27k 2% 0,25W
3041	4822 051 10152	1k5 2% 0,25W
3043	4822 051 10203	20k 2% 0,25W
3044	4822 051 10221	220Ω 2% 0,25W
3049	4822 051 10102	1k 2% 0,25W
3050	4822 051 10103	10k 2% 0,25W
3051	4822 051 10203	20k 2% 0,25W
3052	4822 051 10472	4k7 2% 0,25W
3053	4822 051 10472	4k7 2% 0,25W
3054	4822 110 42205	4M7 5% 0,5W
3060	4822 051 10203	20k 2% 0,25W
3065	4822 051 10184	180k 2% 0,25W
3066	4822 051 10184	180k 2% 0,25W
3067	4822 116 52299	7k5 5% 0,5W
3068	4822 116 52207	1k2 5% 0,5W
3069	4822 051 10752	7k5 2% 0,25W
3072	4822 051 10479	47Ω 2% 0,25W
3073	4822 051 10223	22k 2% 0,25W
3074	4822 051 10103	10k 2% 0,25W
3201	4822 110 42205	4M7 5% 0,5W
3202	4822 110 42205	4M7 5% 0,5W
3204	4822 116 40215	NTC/PTC
3209	4822 113 80575	1Ω 5 10% 5W
3210	4822 116 52239	120k 5% 0,5W
3211	4822 116 52239	120k 5% 0,5W
3212	4822 116 52234	100k 5% 0,5W



3213	4822 051 10823	82k 2% 0,25W
3216	4822 115 90309	56Ω 10% 5W
3239	4822 116 52297	68k 5% 0,5W
3240	4822 116 52297	68k 5% 0,5W
3241	4822 113 80572	2Ω 2 10% 5W
3242	4822 051 10122	1k2 2% 0,25W
3243	4822 116 52226	560Ω 5% 0,5W
3244	4822 051 10151	150Ω 2% 0,25W
3245	4822 116 52226	560Ω 5% 0,5W
3247	4822 051 20222	2k2 5% 0,1W
3248	4822 051 20222	2k2 5% 0,1W
3249	4822 116 52258	220k 5% 0,5W
3250	4822 116 52198	62Ω 5% 0,5W
3251	4822 051 10102	1k 2% 0,25W
3252	4822 116 52258	220k 5% 0,5W
3253	4822 116 82738	10k 10%
3255	4822 116 52243	1k5 5% 0,5W
3266	4822 051 10151	150Ω 2% 0,25W
3267	4822 051 10101	100Ω 2% 0,25W
3268	4822 053 11689	68Ω 5% 2W
3270	4822 051 10118	1Ω 5 0,25W
3271	4822 053 10399	39Ω 5% 1W
3272	4822 116 90536	120Ω 1% 0,125W
3273	4822 051 10472	4k7 2% 0,25W
3274	4822 051 10102	1k 2% 0,25W
3275	4822 116 52206	120Ω 5% 0,5W
3300	4822 053 10753	75k 5% 1W
3304	4822 051 10473	47k 2% 0,25W
3305	4822 051 10332	3k3 2% 0,25W
3306	4822 051 10823	82k 2% 0,25W
3308	4822 053 12151	150Ω 5% 3W
3309	4822 051 10103	10k 2% 0,25W
3310	4822 116 52184	18Ω 5% 0,5W
3311	4822 051 10471	470Ω 2% 0,25W
3312	4822 051 10101	100Ω 2% 0,25W
3313	4822 116 52184	18Ω 5% 0,5W
3314	4822 116 52223	430Ω 5% 0,5W
3315	4822 116 52223	430Ω 5% 0,5W
3317	4822 051 10682	6k8 2% 0,25W
3320	4822 051 10471	470Ω 2% 0,25W
3321	4822 051 10471	470Ω 2% 0,25W
3322	4822 051 10471	470Ω 2% 0,25W
3331	4822 116 52267	30k 5% 0,5W
3332	4822 116 52233	10k 5% 0,5W
3351	4822 052 11279	27Ω 5% 0,5W
3356	4822 051 10751	750Ω 2% 0,25W
3357	4822 050 27871	787Ω 1% 0,6W
3358	4822 116 52183	16Ω 5% 0,5W
3360	4822 051 10122	1k2 2% 0,25W
3362	4822 051 10151	150Ω 2% 0,25W
3364	4822 051 10471	470Ω 2% 0,25W
3365	4822 051 10221	220Ω 2% 0,25W
3366	4822 051 10221	220Ω 2% 0,25W
3368	4822 116 52226	560Ω 5% 0,5W
3369	4822 116 52226	560Ω 5% 0,5W
3370	4822 051 10332	3k3 2% 0,25W
3371	4822 100 11348	1k 30% LIN
3372	4822 051 10561	560Ω 2% 0,25W
3374	4822 116 52301	75k 5% 0,5W
3375	4822 051 10242	2k4 2% 0,25W
3376	4822 116 52175	100Ω 5% 0,5W
3378	4822 051 10101	100Ω 2% 0,25W
3380	4822 051 10152	1k5 2% 0,25W
3381	4822 051 10152	1k5 2% 0,25W
3382	4822 051 10103	10k 2% 0,25W
3383	4822 051 10103	10k 2% 0,25W
3387	4822 051 10223	22k 2% 0,25W
3402	4822 051 10562	5k6 2% 0,25W



3403	4822 051 10229	22Ω 2% 0,25W
3404	4822 051 10182	1k8 2% 0,25W
3405	4822 051 10333	33k 2% 0,25W
3406	4822 100 11483	10k 30% 0,1W
3407	4822 051 10561	560Ω 2% 0,25W
3408	4822 051 10563	56k 2% 0,25W
3409	4822 116 52265	270k 5% 0,5W
3410	4822 100 11731	150k 30% 0,1W
3411	4822 051 10204	200k 2% 0,25W
3412	4822 051 10474	470k 2% 0,25W
3414	4822 051 10154	150k 2% 0,25W
3415	4822 100 11392	47k 30% LIN
3417	4822 116 52256	2k2 5% 0,5W
3418	4822 051 10201	200Ω 2% 0,25W
3419	4822 052 10279	27Ω 5% 0,33W
3421	4822 051 10152	1k5 2% 0,25W
3422	4822 105 11023	1k 30% 0,1W
3424	4822 051 10201	200Ω 2% 0,25W
3426	4822 051 10331	330Ω 2% 0,25W
3428	4822 051 10333	33k 2% 0,25W
3429	4822 116 52205	1k1 5% 0,5W
3430	4822 116 52224	470Ω 5% 0,5W
3438	4822 116 52205	1k1 5% 0,5W
3439	4822 111 90368	680k 2% 0,125W
3440	4822 051 10163	16k 2% 0,25W
3441	4822 116 52293	6k2 5% 0,5W
3442	4822 051 10332	3k3 2% 0,25W
3443	4822 051 10223	22k 2% 0,25W
3444	4822 051 10103	10k 2% 0,25W
3448	4822 116 52233	10k 5% 0,5W
3450	4822 051 10562	5k6 2% 0,25W
3451	4822 051 10432	4k3 2% 0,25W
3453	4822 053 10181	180Ω 5% 1W
3455	4822 051 10471	470Ω 2% 0,25W
3456	4822 051 10114	110k 2% 0,25W
3457	4822 051 10822	8k2 2% 0,25W
3458	4822 116 83332	1Ω 1 5% 0,5W
3459	4822 116 80176	1Ω 5% 0,5W
3460	4822 053 12181	180Ω 5% 3W
3461	4822 116 80176	1Ω 5% 0,5W
3462	4822 116 80176	1Ω 5% 0,5W
3463	5322 116 82222	1Ω 2 5% 0,5W
3464	4822 053 10271	270Ω 5% 1W
3465	4822 051 10681	680Ω 2% 0,25W
3467	4822 100 20166	10k 30% LIN
3468	4822 053 12181	180Ω 5% 3W
3473	4822 051 10109	10Ω 2% 0,25W
3479	4822 051 10683	68k 2% 0,25W
3480	4822 116 52234	100k 5% 0,5W
3481	4822 051 10102	1k 2% 0,25W
3482	4822 051 10229	22Ω 2% 0,25W
3484	4822 051 10224	220k 2% 0,25W
3485	4822 051 10102	1k 2% 0,25W
3500	4822 116 80176	1Ω 5% 0,5W
3501	4822 116 52274	36k 5% 0,5W
3502	4822 116 52306	9k1 5% 0,5W
3503	4822 116 52306	9k1 5% 0,5W
3504	4822 116 52176	10Ω 5% 0,5W
3505	4822 116 52229	750Ω 5% 0,5W
3506	4822 053 11108	1Ω 5% 2W
3507	4822 116 52184	18Ω 5% 0,5W
3508	4822 116 83003	1k5 10% 5W
3509	4822 053 20104	100k 5% 0,25W
3510	4822 053 10681	680Ω 5% 1W
3511	4822 053 11128	1Ω 2 5% 2W
3512	4822 051 10331	330Ω 2% 0,25W
3513	4822 100 11319	4k7 30% LIN
3514	4822 116 52197	56Ω 5% 0,5W


## Large signal panel (continued)

3515	4822 052 10108	1Ω 5% 0,33W	3622	4822 116 80176	1Ω 5% 0,5W	5526	4822 157 63513	EAST-WEST	6516
3516	4822 052 10108	1Ω 5% 0,33W	3623	4822 116 80176	1Ω 5% 0,5W	5527	4822 157 63493	1,5μH 20%	6517
3517	4822 052 11108	1Ω 5% 0,5W	3626	4822 051 10204	200k 2% 0,25W	5534	4822 158 10551	27μH 7,5%	6519
3518	4822 116 52267	30k 5% 0,5W	3627	4822 051 10202	2k 2% 0,25W	5543	4822 157 62412	27μH 10%	6520
3519	4822 116 52267	30k 5% 0,5W	3628	4822 051 10104	100k 2% 0,25W	5555	4822 140 10426	L.O.T.	6526
3520	4822 052 11911	910Ω 5% 0,5W	3629	4822 051 10624	620k 2% 0,25W				6527
3521	4822 052 11911	910Ω 5% 0,5W	3630	4822 051 10103	10k 2% 0,25W				6529
3522	4822 053 12279	27Ω 5% 3W	3631	4822 116 52233	10k 5% 0,5W	6000	4822 130 80446	LL4148	6530
3523	4822 116 52233	10k 5% 0,5W	3632	4822 051 10134	130k 2% 0,25W	6001	4822 130 80446	LL4148	6534
3524	4822 116 52176	10Ω 5% 0,5W	3633	4822 051 10102	1k 2% 0,25W	6008	4822 209 73095	P4KE30C-7000	6536
3525	4822 116 52207	1k2 5% 0,5W	3800	4822 116 52289	5k6 5% 0,5W	6010	4822 130 80446	LL4148	6542
3526	4822 116 52306	9k1 5% 0,5W	3801	4822 051 10184	180k 2% 0,25W	6011	4822 130 80446	LL4148	6546
3527	4822 051 10102	1k 2% 0,25W	3802	4822 051 10104	100k 2% 0,25W	6012	4822 130 80446	LL4148	6547
3528	4822 116 52229	750Ω 5% 0,5W	3803	4822 051 20222	2k2 5% 0,1W	6016	4822 130 80446	LL4148	6551
3529	4822 051 10104	100k 2% 0,25W	3804	4822 051 10103	10k 2% 0,25W	6021	4822 130 80446	LL4148	6570
3530	4822 051 10474	470k 2% 0,25W	3805	4822 111 41424	22Ω 5% 0,3W	6201	4822 130 80446	LL4148	6611
3531	4822 116 52274	36k 5% 0,5W	3806	4822 051 20222	2k2 5% 0,1W	6210	4822 130 33887	GP15J-16	6633
3532	4822 116 52213	180Ω 5% 0,5W	3807	4822 116 52256	2k2 5% 0,5W	6211	4822 130 33887	GP15J-16	6801
3533	4822 116 52213	180Ω 5% 0,5W	3809	4822 051 10104	100k 2% 0,25W	6212	4822 130 33887	GP15J-16	6802
3534	4822 053 11128	1Ω2 5% 2W	3810	4822 050 11002	1k 1% 0,4W	6213	4822 130 33887	GP15J-16	6803
3535	4822 053 11128	1Ω2 5% 2W				6216	4822 130 42606	BYD33J	6804
3536	4822 053 10331	330Ω 5% 1W		Jumper		6230	4822 130 33529	BY229F-200	
3537	4822 116 52197	56Ω 5% 0,5W	4000	4822 051 10008	0Ω 5% 0,25W	6232	4822 130 33529	BY229F-200	
3538	4822 050 28202	8k2 1% 0,6W	4001	4822 051 10008	0Ω 5% 0,25W	6235	4822 130 81104	MA689	
3539	4822 052 10108	1Ω 5% 0,33W	4003	4822 051 10008	0Ω 5% 0,25W	6237	4822 130 80572	RGP30J-L7004	
3540	4822 116 52267	30k 5% 0,5W	4004	4822 051 10008	0Ω 5% 0,25W	6238	4822 130 80572	RGP30J-L7004	7000
3541	4822 116 52272	330k 5% 0,5W	4006	4822 051 10008	0Ω 5% 0,25W	6246	4822 130 82347	LLZ-F6V8	7001
3542	4822 051 10104	100k 2% 0,25W	4007	4822 051 10008	0Ω 5% 0,25W	6251	4822 130 80954	LLZ-C5V6	7002
3543	4822 051 10242	2k4 2% 0,25W	4074	4822 051 10008	0Ω 5% 0,25W	6260	4822 130 80446	LL4148	7003
3544	4822 051 10393	39k 2% 0,25W	4200	4822 051 10008	0Ω 5% 0,25W	6262	4822 130 60778	BYD73B	7005
3545	4822 116 52208	130Ω 5% 0,5W	4400	4822 051 10008	0Ω 5% 0,25W	6266	4822 130 34278	BZX79-F6V8	7006
3546	4822 051 10104	100k 2% 0,25W	4402	4822 051 10008	0Ω 5% 0,25W	6272	4822 130 34173	BZX55-B5V6	7007
3547	4822 051 10109	10Ω 2% 0,25W	4403	4822 051 10008	0Ω 5% 0,25W	6280	4822 130 30621	1N4148	7008
3548	4822 051 10392	3k9 2% 0,25W	4404	4822 051 10008	0Ω 5% 0,25W	6280	4822 130 30621	1N4148	7009
3549	4822 051 10124	120k 2% 0,25W	4406	4822 051 10008	0Ω 5% 0,25W	6302	4822 130 80446	LL4148	7010
3550	4822 051 10132	1k3 2% 0,25W	4407	4822 051 10008	0Ω 5% 0,25W	6303	4822 130 80446	LL4148	7011
3551	4822 051 10151	150Ω 2% 0,25W	4407	4822 051 10008	0Ω 5% 0,25W	6304	4822 130 80446	LL4148	7012
3552	4822 116 52207	1k2 5% 0,5W	4408	4822 051 10008	0Ω 5% 0,25W	6306	4822 130 34499	BZX79-C20	7013
3553	4822 116 52207	1k2 5% 0,5W	4409	4822 051 10008	0Ω 5% 0,25W	6308	4822 130 42488	BYD33D	7201
3556	4822 053 11108	1Ω 5% 2W	4415	4822 051 10008	0Ω 5% 0,25W	6312	4822 130 42488	BYD33D	7216
3558	4822 051 10109	10Ω 2% 0,25W	4511	4822 051 10008	0Ω 5% 0,25W	6315	4822 130 80446	LL4148	7241
3560	4822 113 80453	6Ω8 10% 5W	4512	4822 051 10008	0Ω 5% 0,25W	6319	4822 130 34173	BZX79-C5V6	7242
3561	5322 116 81141	820Ω 5%	4601	4822 051 10008	0Ω 5% 0,25W	6321	4822 130 80954	LLZ-C5V6	7243
3562	5322 116 80434	2k2 1% 0,125W	4802	4822 051 10008	0Ω 5% 0,25W	6331	4822 130 80446	LL4148	7250
3563	4822 116 52175	100Ω 5% 0,5W	4803	4822 051 10008	0Ω 5% 0,25W	6349	4822 130 80446	LL4148	7251
3564	4822 051 10569	56Ω 2% 0,25W	4804	4822 051 10008	0Ω 5% 0,25W	6350	4822 130 80446	LL4148	7268
3570	4822 116 52207	1k2 5% 0,5W				6351	4822 130 80446	LL4148	7270
3601	4822 051 10104	100k 2% 0,25W				6352	4822 130 80446	LL4148	7272
3602	4822 100 11213	22k 30% LIN				6353	4822 130 80446	LL4148	7273
3603	4822 051 10163	16k 2% 0,25W				6355	4822 130 80446	LL4148	7305
3604	4822 051 10624	620k 2% 0,25W	5204	4822 157 63508	18μH	6356	4822 130 82345	LLZ-C22	7311
3605	4822 051 10203	20k 2% 0,25W	5230	4822 148 81192	SOPS	6357	4822 130 80446	LL4148	7312
3606	4822 051 10223	22k 2% 0,25W	5237	4822 526 10494	ferrite bead	6370	4822 130 81512	LLZ-C6V2	7318
3607	4822 100 11213	22k 30% LIN	5241	4822 157 62412	27μH 10%5K	6371	4822 130 80446	LL4148	7320
3608	4822 051 10103	10k 2% 0,25W	5255	4822 146 30955	transf. assy	6372	4822 130 80446	LL4148	7321
3609	4822 051 10473	47k 2% 0,25W				6373	4822 130 82583	LLZ-C9V1	7360
3610	4822 051 10472	4k7 2% 0,25W				6375	4822 130 80446	LL4148	7369
3611	4822 116 52256	2k2 5% 0,5W				6376	4822 130 80922	LLZ-C18	7370
3612	4822 116 52283	4k7 5% 0,5W				6402	4822 130 80446	LL4148	7371
3613	4822 051 10202	2k 2% 0,25W				6403	4822 130 80446	LL4148	7380
3614	4822 116 52249	1k8 5% 0,5W				6404	4822 130 80446	LL4148	7381
3615	4822 116 52224	470Ω 5% 0,5W				6417	4822 130 81223	LLZ-C2V4	7384
3616	4822 051 10332	3k3 2% 0,25W				6422	4822 130 80446	LL4148	7400
3617	4822 051 20222	2k2 5% 0,1W				6440	4822 130 30621	1N4148	7402
3618	4822 051 10683	68k 2% 0,25W				6441	4822 130 80446	LL4148	7417
3619	4822 051 20222	2k2 5% 0,1W				6452	4822 130 42488	BYD33D	7443
3620	4822 051 10622	6k2 2% 0,25W				6480	4822 130 31554	BZX79-C4V3	7444
3621	4822 051 10114	110k 2% 0,25W				6506	5322 130 32184	BYV27/50	7450
			5255	4822 157 52392	27μH 10%	6515	4822 130 42488	BYD33D	7451

## Large signal panel (continued)

DAF panel **B**

6516	4822 130 42488	BYD33D
6517	4822 130 42488	BYD33D
6519	4822 130 32896	BYD33M
6520	4822 130 32896	BYD33M
6526	4822 130 33531	BY229F-600
6527	4822 130 82584	MUR10150E
6529	4822 130 34329	BZX79-C43
6530	4822 130 30842	BAV21
6534	4822 130 82758	BYV29F-300
6536	4822 130 33529	BY229F-200
6542	4822 130 42488	BYD33D
6546	4822 130 80446	LL4148
6547	4822 130 30621	1N4148
6551	4822 130 31981	BZX79-F3V9
6570	4822 130 31024	BZX79-C18
6611	4822 130 81027	LLZ-C11
6633	4822 130 81512	LLZ-C6V2
6801	4822 130 80446	LL4148
6802	5322 130 34337	BAV99
6803	4822 130 80446	LL4148
6804	4822 130 80446	LL4148



7000	4822 209 73311	TDA1521Q/N4
7001	4822 209 73311	TDA1521Q/N4
7002	4822 209 83163	LM833N
7003	4822 130 61207	BC848
7005	5322 130 42136	BC848C
7006	5322 130 42136	BC848C
7007	4822 130 61207	BC848
7008	4822 130 61207	BC848
7009	4822 209 83163	LM833N
7010	5322 130 42012	BC858
7011	4822 209 63913	TDA1521AQ/N4
7012	4822 130 61207	BC848
7013	4822 130 61207	BC848
7201	5322 130 42756	BC857C
7216	4822 130 60851	2SC3973B
7241	4822 130 61003	BD944F
7242	5322 130 41981	BC848A
7243	5322 130 41981	BC848A
7250	4822 130 62509	BUX85F
7251	4822 130 61207	BC848
7268	4822 130 44121	BC338
7270	4822 130 40823	BD135
7272	4822 130 61207	BC848
7273	4822 130 42513	BC858C
7305	5322 130 42136	BC848C
7311	4822 130 42513	BC858C
7312	4822 130 40982	BD437
7318	4822 130 42615	BC817-40
7320	4822 130 82034	CNX83A
7321	4822 130 62742	BD943F
7360	4822 130 42513	BC858C
7369	5322 130 42755	BC847C
7370	5322 130 42136	BC848C
7371	4822 130 42513	BC858C
7380	4822 130 42513	BC858C
7381	5322 130 42136	BC848C
7384	5322 130 42755	BC847C
7400	4822 209 30402	TDA2579B/N1/S1
7402	5322 130 42136	BC848C
7417	4822 130 42513	BC858C
7443	4822 130 61207	BC848
7444	4822 130 61207	BC848
7450	4822 209 30403	TDA3654Q/N3/S1
7451	5322 130 42012	BC858A



7469	4822 130 44283	BC636
7480	4822 130 42513	BC858C
7481	5322 130 42136	BC848C
7501	4822 130 42159	TBF819
7506	4822 130 62843	2SC4288A
7512	4822 130 41344	BC337-40
7513	4822 130 41327	BC327-40
7530	4822 130 61233	BC857
7540	5322 130 42755	BC847C
7541	5322 130 42755	BC847C
7542	5322 130 42756	BC857C
7543	4822 130 80136	BC856
7550	4822 130 61003	BD944F
7551	4822 130 62846	ON4590
7552	4822 130 62846	ON4590
7601	4822 130 61207	BC848
7602	5322 130 42012	BC858
7603	5322 130 42012	BC858
7608	4822 130 44503	BC547C
7610	4822 130 62845	BDT60F
7616	5322 130 42136	BC848C
7618	5322 130 42136	BC848C
7800	5322 209 10576	4053B
7801	4822 130 61207	BC848
7802	4822 130 61207	BC848

4822 265 20533	2P male
4822 265 40596	2P male
4822 267 41018	2P male
4822 265 20509	2P male



2860 4822 126 11825 680pF 10% 2KV



3861 4822 051 10123 12k 2% 0,25W



5860 5322 150 31002 AT4043/67



Small signal panel (continued)

0% 50V	2662	5322 122 31647	1nF 10% 63V	3146	4822 050 11002	1k 1% 0,4W	3237	4822 116 52217	270Ω 5% 0,5W
0V	2664	4822 122 32153	1,8nF 10% 63V	3148	4822 051 10473	47k 2% 0,25W	3238	4822 116 52222	390Ω 5% 0,5W
5% 63V	2666	4822 122 32153	1,8nF 10% 63V	3149	4822 051 10473	47k 2% 0,25W	3239	4822 051 10271	270Ω 2% 0,25W
20% 63V	2680	4822 122 31947	100nF 20% 63V	3150	4822 051 10473	47k 2% 0,25W	3240	4822 051 10759	75Ω 2% 0,25W
m.	2681	4822 122 32542	47nF 10% 63V	3151	4822 051 10562	5k6 2% 0,25W	3241	4822 051 10759	75Ω 2% 0,25W
m.	2682	4822 124 40195	150μF 20% 16V	3153	4822 051 10103	10k 2% 0,25W	3242	4822 116 52219	330Ω 5% 0,5W
5% 63V	2684	4822 121 51252	470nF 5% 63V	3154	4822 051 10152	1k5 2% 0,25W	3243	4822 051 10152	1k5 2% 0,25W
% 63V	2686	4822 121 51252	470nF 5% 63V	3155	4822 051 10104	100k 2% 0,25W	3244	4822 051 10102	1k 2% 0,25W
0V	2688	4822 122 31782	15nF 10% 50V	3156	4822 051 10562	5k6 2% 0,25W	3245	4822 051 10474	470k 2% 0,25W
% 63V	2690	4822 122 31782	15nF 10% 50V	3157	4822 050 11002	1k 1% 0,4W	3246	4822 051 10331	330Ω 2% 0,25W
0V	2692	4822 122 31981	33nF + -0,5pF 50V	3158	4822 050 11002	1k 1% 0,4W	3247	4822 051 10102	1k 2% 0,25W
0% 50V	2694	4822 122 31916	5,6nF 10% 63V	3159	4822 051 10103	10k 2% 0,25W	3248	4822 051 10681	680Ω 2% 0,25W
0% 63V	2696	4822 122 31981	33nF + -0,5pF 50V	3160	4822 052 10758	7Ω5 5% 0,33W	3249	4822 051 10102	1k 2% 0,25W
0% 50V	2697	4822 122 31965	220pF 5% 63V	3161	4822 051 10103	10k 2% 0,25W	3251	4822 051 10759	75Ω 2% 0,25W
0% 50V	2698	4822 122 31916	5,6nF 10% 63V	3162	4822 050 27508	7Ω5 1% 0,6W	3252	4822 051 10759	75Ω 2% 0,25W
0% 50V	2699	4822 122 31965	220pF 5% 63V	3163	4822 051 10223	22k 2% 0,25W	3253	4822 051 10561	560Ω 2% 0,25W
0% 50V	2700	4822 124 40242	1μF 20% 63V	3164	4822 051 10101	100Ω 2% 0,25W	3254	4822 116 81193	15Ω 5% 0,3W
0% 50V	2702	4822 124 40242	1μF 20% 63V	3165	4822 051 10101	100Ω 2% 0,25W	3255	4822 051 10821	820Ω 2% 0,25W
0% 50V	2704	4822 122 31644	2,2nF 10% 63V	3166	4822 052 10228	2Ω2 5% 0,33W	3256	4822 051 10103	10k 2% 0,25W
0% 18V	2706	4822 124 41678	22μF 20% 25V	3167	4822 051 10122	1k2 2% 0,25W	3257	4822 051 10103	10k 2% 0,25W
0% 50V	2707	4822 122 31784	4,7nF 10% 50V	3168	4822 051 10242	2k4 2% 0,25W	3259	4822 051 10103	10k 2% 0,25W
0% 50V	2714	4822 122 32863	22nF 80% 50V	3169	4822 116 52175	100Ω 5% 0,5W	3260	4822 116 81193	15Ω 5% 0,3W
0% 63V	2716	4822 122 32597	6,8nF 10% 63V	3170	4822 116 82772	3Ω9 5% 0,3W	3261	4822 051 10471	470Ω 2% 0,25W
0% 63V	2720	4822 124 41678	22μF 20% 25V	3171	4822 052 11511	510Ω 5% 0,5W	3262	4822 051 10103	10k 2% 0,25W
% 63V	2721	4822 122 31784	4,7nF 10% 50V	3172	4822 111 41424	22Ω 5% 0,3W	3263	4822 051 10689	68Ω 2% 0,25W
0% 50V	2726	4822 122 31644	2,2nF 10% 63V	3180	4822 116 52224	470Ω 5% 0,5W	3264	4822 051 10471	470Ω 2% 0,25W
0% 50V	2727	4822 124 40435	10μF 20% 50V	3181	4822 051 10822	8k2 2% 0,25W	3265	4822 051 10103	10k 2% 0,25W
0% 50V	2728	4822 124 40435	10μF 20% 50V	3182	4822 116 52214	200Ω 5% 0,5W	3266	4822 051 10103	10k 2% 0,25W
0% 50V	2734	4822 122 32863	22nF 80% 50V	3183	4822 116 52233	10k 5% 0,5W	3267	4822 051 10103	10k 2% 0,25W
0% 50V	2736	4822 122 32597	6,8nF 10% 63V	3184	4822 116 90536	120Ω 1% 0,125W	3268	4822 051 10101	100Ω 2% 0,25W
% 63V	3100	4822 051 10102	1k 2% 0,25W	3185	4822 051 10471	470Ω 2% 0,25W	3269	4822 051 10561	560Ω 2% 0,25W
6 63V	3101	4822 116 52175	100Ω 5% 0,5W	3186	4822 116 52256	2k2 5% 0,5W	3270	4822 051 10472	4k7 2% 0,25W
6 50V	3103	4822 051 10101	100Ω 2% 0,25W	3187	4822 051 10759	75Ω 2% 0,25W	3271	4822 051 10471	470Ω 2% 0,25W
6 50V	3104	4822 116 52175	100Ω 5% 0,5W	3188	4822 051 20222	2k2 5% 0,1W	3272	4822 116 52228	680Ω 5% 0,5W
6 50V	3105	4822 051 10101	100Ω 2% 0,25W	3189	4822 051 10223	22k 2% 0,25W	3273	4822 051 10471	470Ω 2% 0,25W
0% 50V	3115	4822 116 52175	100Ω 5% 0,5W	3191	4822 116 81202	62k 1% 0,125W	3274	4822 051 10103	10k 2% 0,25W
0% 50V	3116	4822 116 52175	100Ω 5% 0,5W	3193	4822 051 10331	330Ω 2% 0,25W	3275	4822 051 10689	68Ω 2% 0,25W
% 50V	3117	4822 051 20222	2k2 5% 0,1W	3194	4822 051 10331	330Ω 2% 0,25W	3276	4822 051 10471	470Ω 2% 0,25W
% 18V	3119	4822 051 20222	2k2 5% 0,1W	3196	4822 051 10473	47k 2% 0,25W	3277	4822 051 10271	270Ω 2% 0,25W
0% 63V	3120	4822 051 20222	2k2 5% 0,1W	3197	4822 051 10473	47k 2% 0,25W	3279	4822 051 10689	68Ω 2% 0,25W
0% 63V	3121	4822 051 10123	12k 2% 0,25W	3200	4822 051 10472	4k7 2% 0,25W	3281	4822 116 52201	75Ω 5% 0,5W
0% 63V	3122	4822 051 10472	4k7 2% 0,25W	3201	4822 051 10472	4k7 2% 0,25W	3285	4822 051 10103	10k 2% 0,25W
0% 63V	3123	4822 051 10472	4k7 2% 0,25W	3205	4822 051 10759	75Ω 2% 0,25W	3286	4822 051 10103	10k 2% 0,25W
0% 63V	3124	4822 051 10101	100Ω 2% 0,25W	3206	4822 051 10759	75Ω 2% 0,25W	3300	4822 051 10103	10k 2% 0,25W
0% 63V	3125	4822 051 10101	100Ω 2% 0,25W	3207	4822 051 10759	75Ω 2% 0,25W	3301	4822 051 10332	3k3 2% 0,25W
0% 63V	3126	4822 051 10101	100Ω 2% 0,25W	3208	4822 051 10101	100Ω 2% 0,25W	3303	4822 051 10361	360Ω 2% 0,25W
0% 63V	3127	4822 051 10101	100Ω 2% 0,25W	3209	4822 051 10101	100Ω 2% 0,25W	3303	4822 051 10241	240Ω 2% 0,25W
% 63V	3128	4822 051 10471	470Ω 2% 0,25W	3210	4822 051 10101	100Ω 2% 0,25W	3304	4822 116 90536	120Ω 1% 0,125W
% 63V	3129	4822 116 52175	100Ω 5% 0,5W	3211	4822 116 52217	270Ω 5% 0,5W	3305	4822 051 10104	100k 2% 0,25W
% 63V	3131	4822 116 52175	100Ω 5% 0,5W	3215	4822 051 10689	68Ω 2% 0,25W	3306	4822 051 10221	220Ω 2% 0,25W
% 25V	3132	4822 116 52175	100Ω 5% 0,5W	3216	4822 116 81193	15Ω 5% 0,3W	3310	4822 116 52283	4k7 5% 0,5W
% 63V	3133	4822 051 10151	150Ω 2% 0,25W	3217	4822 116 52224	470Ω 5% 0,5W	3311	4822 051 10132	1k3 2% 0,25W
% 63V	3134	4822 116 52175	100Ω 5% 0,5W	3218	4822 051 10471	470Ω 2% 0,25W	3312	4822 051 10511	510Ω 2% 0,25W
% 63V	3135	4822 051 10101	100Ω 2% 0,25W	3219	4822 051 10471	470Ω 2% 0,25W	3313	4822 051 20222	2k2 5% 0,1W
% 63V	3136	4822 051 10101	100Ω 2% 0,25W	3220	4822 051 10471	470Ω 2% 0,25W	3314	4822 051 10102	1k 2% 0,25W
% 63V	3137	4822 116 52183	16Ω 5% 0,5W	3222	4822 116 52217	270Ω 5% 0,5W	3315	4822 051 10103	10k 2% 0,25W
% 63V	3138	4822 116 52175	100Ω 5% 0,5W	3224	4822 051 10759	75Ω 2% 0,25W	3316	4822 051 10112	1k1 2% 0,25W
% 63V	3139	4822 116 52175	100Ω 5% 0,5W	3225	4822 051 10471	470Ω 2% 0,25W	3317	4822 116 52233	10k 5% 0,5W
% 63V	3140	4822 050 11002	1k 1% 0,4W	3226	4822 051 10152	1k5 2% 0,25W	3324	4822 051 10223	22k 2% 0,25W
% 63V	3141	4822 050 11002	1k 1% 0,4W	3227	4822 051 10112	1k1 2% 0,25W	3325	4822 051 10682	6k8 2% 0,25W
63V	3142	4822 050 11002	1k 1% 0,4W	3228	4822 051 10474	470k 2% 0,25W	3326	4822 051 10103	10k 2% 0,25W
63V	3143	4822 050 11002	1k 1% 0,4W	3229	4822 051 10331	330Ω 2% 0,25W	3327	4822 051 10122	1k2 2% 0,25W
63V	3144	4822 050 11002	1k 1% 0,4W	3230	4822 050 11002	1k 1% 0,4W	3329	4822 051 10118	1Ω1 5% 0,25W
63V	3145	4822 050 11002	1k 1% 0,4W	3231	4822 051 10681	680Ω 2% 0,25W	3336	4822 051 10472	4k7 2% 0,25W
				3232	4822 051 10102	1k 2% 0,25W	3338	4822 051 10391	390Ω 2% 0,25W
				3233	4822 051 10102	1k 2% 0,25W	3339	4822 051 10153	15k 2% 0,25W
				3234	4822 051 10759	75Ω 2% 0,25W	3342	4822 051 20222	2k2 5% 0,1W
				3235	4822 051 10759	75Ω 2% 0,25W	3344	4822 051 10273	27k 2% 0,25W



Small signal panel (continued)

	3350	4822 116 90536	120 $\Omega$ 1% 0,125W
	3351	4822 051 10472	4k7 2% 0,25W
	3353	4822 051 10332	3k3 2% 0,25W
	3360	4822 052 10278	2 $\Omega$ 7 5% 0,33W
	3361	4822 051 10102	1k 2% 0,25W
	3369	4822 051 10331	330 $\Omega$ 2% 0,25W
	3370	4822 100 11391	330 $\Omega$ 30% LIN
	3371	4822 051 10431	430 $\Omega$ 2% 0,25W
	3372	4822 051 10331	330 $\Omega$ 2% 0,25W
	3375	4822 051 10008	0 $\Omega$ 5% 0,25W
	3377	4822 051 10332	3k3 2% 0,25W
	3380	4822 050 11002	1k 1% 0,4W
	3382	4822 051 20222	2k2 5% 0,1W
	3383	4822 051 10103	10k 2% 0,25W
	3385	4822 051 10105	1M 5% 0,25W
	3387	4822 050 11002	1k 1% 0,4W
	3389	4822 051 10182	1k8 2% 0,25W
	3390	4822 051 10911	910 $\Omega$ 2% 0,25W
	3391	4822 051 20222	2k2 5% 0,1W
	3392	4822 051 10101	100 $\Omega$ 2% 0,25W
	3393	4822 051 10101	100 $\Omega$ 2% 0,25W
	3394	4822 051 10101	100 $\Omega$ 2% 0,25W
	3395	4822 051 10471	470 $\Omega$ 2% 0,25W
	3396	4822 051 20222	2k2 5% 0,1W
	3397	4822 111 41424	22 $\Omega$ 5% 0,3W
	3398	4822 116 52175	100 $\Omega$ 5% 0,5W
	3399	4822 116 52175	100 $\Omega$ 5% 0,5W
	3400	4822 051 10471	470 $\Omega$ 2% 0,25W
	3410	4822 116 52224	470 $\Omega$ 5% 0,5W
	3425	4822 116 52224	470 $\Omega$ 5% 0,5W
	3426	4822 116 52224	470 $\Omega$ 5% 0,5W
	3450	4822 051 20222	2k2 5% 0,1W
	3451	4822 051 10432	4k3 2% 0,25W
	3453	4822 051 10511	510 $\Omega$ 2% 0,25W
	3454	4822 051 10101	100 $\Omega$ 2% 0,25W
	3455	4822 051 10101	100 $\Omega$ 2% 0,25W
	3456	4822 051 10101	100 $\Omega$ 2% 0,25W
	3465	4822 050 11002	1k 1% 0,4W
	3475	4822 051 10124	120k 2% 0,25W
	3476	4822 051 10154	150k 2% 0,25W
	3477	4822 116 52286	5k1 5% 0,5W
	3478	4822 051 10471	470 $\Omega$ 2% 0,25W
	3479	4822 051 10223	22k 2% 0,25W
	3480	4822 052 10278	2 $\Omega$ 7 5% 0,33W
	3481	4822 052 10278	2 $\Omega$ 7 5% 0,33W
	3482	4822 116 52223	430 $\Omega$ 5% 0,5W
	3483	4822 116 52175	100 $\Omega$ 5% 0,5W
	3600	4822 051 10362	3k6 2% 0,25W
	3602	4822 100 11212	2k2 30% LIN
	3603	4822 051 10332	3k3 2% 0,25W
	3604	4822 051 10182	1k8 2% 0,25W
	3605	4822 051 10472	4k7 2% 0,25W
	3606	4822 052 10279	27 $\Omega$ 5% 0,33W
	3608	4822 051 10101	100 $\Omega$ 2% 0,25W
	3610	4822 051 10101	100 $\Omega$ 2% 0,25W
	3612	4822 051 10102	1k 2% 0,25W
	3620	4822 051 10184	180k 2% 0,25W
	3622	4822 051 10184	180k 2% 0,25W
	3624	4822 051 10102	1k 2% 0,25W
	3626	4822 051 10184	180k 2% 0,25W
	3628	4822 051 10102	1k 2% 0,25W
	3630	4822 051 10184	180k 2% 0,25W
	3632	4822 051 10102	1k 2% 0,25W
	3634	4822 051 10184	180k 2% 0,25W
	3636	4822 051 10102	1k 2% 0,25W
	3638	4822 051 10184	180k 2% 0,25W
	3640	4822 051 10102	1k 2% 0,25W
	3642	4822 051 10184	180k 2% 0,25W

	3644	4822 051 10102	1k 2% 0,25W
	3646	4822 051 10184	180k 2% 0,25W
	3650	4822 051 10392	3k9 2% 0,25W
	3651	4822 051 10123	12k 2% 0,25W
	3652	4822 051 10392	3k9 2% 0,25W
	3653	4822 051 10123	12k 2% 0,25W
	3654	4822 116 52244	15k 5% 0,5W
	3660	4822 051 10331	330 $\Omega$ 2% 0,25W
	3662	4822 051 10151	150 $\Omega$ 2% 0,25W
	3664	4822 051 10331	330 $\Omega$ 2% 0,25W
	3665	4822 116 81193	15 $\Omega$ 5% 0,3W
	3666	4822 051 10151	150 $\Omega$ 2% 0,25W
	3668	4822 051 10331	330 $\Omega$ 2% 0,25W
	3672	4822 051 10331	330 $\Omega$ 2% 0,25W
	3680	4822 052 10279	27 $\Omega$ 5% 0,33W
	3682	4822 051 10568	5 $\Omega$ 6 5% 0,25W
	3684	4822 116 52175	100 $\Omega$ 5% 0,5W
	3686	4822 116 52175	100 $\Omega$ 5% 0,5W
	3700	4822 116 52263	2k7 5% 0,5W
	3702	4822 051 10223	22k 2% 0,25W
	3704	4822 051 10102	1k 2% 0,25W
	3706	4822 116 81203	10 $\Omega$ 5% 0,3W
	3708	4822 051 10101	100 $\Omega$ 2% 0,25W
	3710	4822 051 20183	18k 5% 0,1W
	3712	4822 116 52203	91 $\Omega$ 5% 0,5W
	3713	4822 116 52203	91 $\Omega$ 5% 0,5W
	3714	4822 051 10828	8 $\Omega$ 2 5% 0,25W
	3720	4822 116 81203	10 $\Omega$ 5% 0,3W
	3722	4822 116 52263	2k7 5% 0,5W
	3724	4822 051 10223	22k 2% 0,25W
	3726	4822 051 10102	1k 2% 0,25W
	3728	4822 051 10101	100 $\Omega$ 2% 0,25W
	3730	4822 051 20183	18k 5% 0,1W
	3732	4822 116 52203	91 $\Omega$ 5% 0,5W
	3733	4822 116 52203	91 $\Omega$ 5% 0,5W
	3734	4822 051 10828	8 $\Omega$ 2 5% 0,25W
Jumpers			
	4066	4822 051 10008	0 $\Omega$ 5% 0,25W
	4100	4822 051 10008	0 $\Omega$ 5% 0,25W
	4105	4822 051 10008	0 $\Omega$ 5% 0,25W
	4106	4822 051 10008	0 $\Omega$ 5% 0,25W
	4107	4822 051 10008	0 $\Omega$ 5% 0,25W
	4108	4822 051 10008	0 $\Omega$ 5% 0,25W
	4109	4822 051 10008	0 $\Omega$ 5% 0,25W
	4111	4822 051 10008	0 $\Omega$ 5% 0,25W
	4112	4822 051 10008	0 $\Omega$ 5% 0,25W
	4114	4822 051 10008	0 $\Omega$ 5% 0,25W
	4115	4822 051 10008	0 $\Omega$ 5% 0,25W
	4120	4822 051 10008	0 $\Omega$ 5% 0,25W
	4121	4822 051 10008	0 $\Omega$ 5% 0,25W
	4125	4822 051 10008	0 $\Omega$ 5% 0,25W
	4127	4822 051 10008	0 $\Omega$ 5% 0,25W
	4130	4822 051 10008	0 $\Omega$ 5% 0,25W
	4148	4822 051 10008	0 $\Omega$ 5% 0,25W
	4162	4822 051 10008	0 $\Omega$ 5% 0,25W
	4164	4822 051 10008	0 $\Omega$ 5% 0,25W
	4166	4822 051 10008	0 $\Omega$ 5% 0,25W
	4170	4822 051 10008	0 $\Omega$ 5% 0,25W
	4171	4822 051 10008	0 $\Omega$ 5% 0,25W
	4184	4822 051 10008	0 $\Omega$ 5% 0,25W
	4200	4822 051 10008	0 $\Omega$ 5% 0,25W
	4201	4822 051 10008	0 $\Omega$ 5% 0,25W
	4203	4822 051 10008	0 $\Omega$ 5% 0,25W
	4205	4822 051 10008	0 $\Omega$ 5% 0,25W
	4210	4822 051 10008	0 $\Omega$ 5% 0,25W
	4227	4822 051 10008	0 $\Omega$ 5% 0,25W
	4234	4822 051 10008	0 $\Omega$ 5% 0,25W

Jumpers			
	4235	4822 051 10008	0 $\Omega$ 5% 0,25W
	4236	4822 051 10008	0 $\Omega$ 5% 0,25W
	4241	4822 051 10008	0 $\Omega$ 5% 0,25W
	4246	4822 051 10008	0 $\Omega$ 5% 0,25W
	4255	4822 051 10008	0 $\Omega$ 5% 0,25W
	4260	4822 051 10008	0 $\Omega$ 5% 0,25W
	4262	4822 051 10008	0 $\Omega$ 5% 0,25W
	4280	4822 051 10008	0 $\Omega$ 5% 0,25W
	4302	4822 051 10008	0 $\Omega$ 5% 0,25W
	4319	4822 051 10008	0 $\Omega$ 5% 0,25W
	4320	4822 051 10008	0 $\Omega$ 5% 0,25W
	4321	4822 051 10008	0 $\Omega$ 5% 0,25W
	4322	4822 051 10008	0 $\Omega$ 5% 0,25W
	4330	4822 051 10008	0 $\Omega$ 5% 0,25W
	4331	4822 051 10008	0 $\Omega$ 5% 0,25W
	4360	4822 051 10008	0 $\Omega$ 5% 0,25W
	4361	4822 051 10008	0 $\Omega$ 5% 0,25W
	4377	4822 051 10008	0 $\Omega$ 5% 0,25W
	4420	4822 051 10008	0 $\Omega$ 5% 0,25W
	4440	4822 051 10008	0 $\Omega$ 5% 0,25W
	4450	4822 051 10008	0 $\Omega$ 5% 0,25W
	4452	4822 051 10008	0 $\Omega$ 5% 0,25W
	4455	4822 051 10008	0 $\Omega$ 5% 0,25W
	4476	4822 051 10008	0 $\Omega$ 5% 0,25W
	4477	4822 051 10008	0 $\Omega$ 5% 0,25W
	4496	4822 051 10008	0 $\Omega$ 5% 0,25W
	4498	4822 051 10008	0 $\Omega$ 5% 0,25W
	4610	4822 051 10008	0 $\Omega$ 5% 0,25W
	4672	4822 051 10008	0 $\Omega$ 5% 0,25W
	4673	4822 051 10008	0 $\Omega$ 5% 0,25W
Capacitors			
	5100	4822 157 53906	47 $\mu$ H 10%
	5115	4822 152 20677	10 $\mu$ H 10%
	5270	4822 157 52983	22 $\mu$ H 10%
	5303	4822 157 53302	1 $\mu$ H 20%
	5304	4822 157 53302	1 $\mu$ H 20%
	5305	4822 157 62823	26 $\mu$ H 6%
	5310	4822 157 63245	82 $\mu$ H 10%
	5345	4822 157 62822	4,5 $\mu$ H 6%
	5346	4822 157 62823	26 $\mu$ H 6%
	5370	4822 157 62824	7,5 $\mu$ H 6%
	5454	4822 157 63065	0,68 $\mu$ H 20%
	5455	4822 157 63065	0,68 $\mu$ H 20%
	5456	4822 157 63065	0,68 $\mu$ H 20%
Diodes			
	6117	4822 130 80906	LLZ-F7V5
	6120	4822 130 80446	LL4148
	6121	4822 130 80446	LL4148
	6163	4822 130 81226	LLZ-F33
	6168	4822 130 80446	LL4148
	6172	4822 130 80906	LLZ-C7V5
	6173	4822 130 80446	LL4148
	6178	4822 130 81222	LLZ-C15
	6205	4822 130 81015	LLZ-C10
	6206	4822 130 81015	LLZ-C10
	6207	4822 130 81015	LLZ-C10
	6280	4822 130 80446	LL4148
	6281	4822 130 80446	LL4148
	6342	4822 130 80888	BA682
	6343	4822 130 80888	BA682
	6386	4822 130 80446	LL4148
	6387	4822 130 80954	LLZ-C5V6
	6450	4822 130 81512	LLZ-C6V2
	6465	4822 130 80446	LL4148
	6470	4822 130 80446	LL4148

Small signal panel	
6471	4
6478	4
6479	4
6480	4
6610	4
6660	4
6661	4
6662	4
6663	4
6664	4
6665	4
7000	5
7119	5
7120	5
7121	4
7130	5
7137	4
7176	4
7177	4
7178	5
7182	5
7183	5
7186	4
7188	5
7193	4
7216	4
7219	4
7226	5
7228	5
7243	5
7244	5
7258	5
7260	4
7261	5
7265	5
7268	4
7270	5
7273	4
7305	5
7311	5
7312	5</

## Small signal panel (continued)



6471	4822 130 30621	1N4148
6478	4822 130 82345	LLZ-C22
6479	4822 130 80877	BAV103
6480	4822 130 82348	LLZ-F9V1
6610	4822 130 30621	1N4148
6660	4822 130 80446	LL4148
6661	4822 130 81223	LLZ-C2V4
6662	4822 130 80446	LL4148
6663	4822 130 81223	LLZ-C2V4
6664	4822 130 80446	LL4148
6665	4822 130 80446	LL4148



7000	5322 130 44921	BD943
7119	5322 130 41982	BC848B
7120	5322 130 41982	BC848B
7121	4822 130 42513	BC858C
7130	5322 130 42136	BC848C
7137	4822 209 71521	X2404
7176	4822 130 42513	BC858C
7177	4822 130 42513	BC858C
7178	5322 130 41982	BC848B
7182	5322 130 44743	BSR12
7183	5322 130 41982	BC848B
7186	4822 209 73852	PMBT2369
7188	5322 130 41982	BC848B
7193	4822 209 61115	LF353N
7216	4822 130 42615	BC817-40
7219	4822 209 63292	TEA6414
7226	5322 130 41983	BC858B
7228	5322 130 41982	BC848B
7243	5322 130 41983	BC858B
7244	5322 130 41982	BC848B
7258	5322 209 10421	HEF4094BP
7260	4822 130 42615	BC817-40
7261	5322 130 42136	BC848C
7265	5322 130 41982	BC848B
7268	4822 130 42615	BC817-40
7270	5322 130 41982	BC848B
7273	4822 130 42615	BC817-40
7305	5322 130 41983	BC858B
7311	5322 130 41982	BC848B
7312	5322 130 42136	BC848C
7313	4822 130 42513	BC858C
7314	5322 130 42136	BC848C
7315	5322 130 42136	BC848C
7324	4822 209 63901	TDA4568/V2
7326	5322 130 42136	BC848C
7338	5322 130 41982	BC848B
7350	5322 130 41982	BC848B
7360	4822 130 42615	BC817-40
7365	4822 209 30011	TDA4650/V4
7366	4822 209 63108	TDA4660/V2S2
7390	4822 130 42513	BC858C
7395	4822 209 30394	TDA8443B/C1
7410	4822 209 73852	PMBT2369
7430	4822 209 63298	TDA4680/V4
7450	5322 130 42136	BC848C
7451	5322 130 42755	BC847C
7480	5322 130 44921	BD943
7600	4822 209 63967	TDA8417/V2
7620	4822 209 10263	4052B
7622	4822 209 10263	4052B
7630	4822 209 61115	LF353N
7635	4822 209 61115	LF353N
7660	5322 130 41982	BC848B
7661	5322 130 41982	BC848B



7662	5322 130 41982	BC848B
7680	4822 209 63734	TDA8425/V7
7704	4822 209 83163	LM833N
7706	5322 130 41982	BC848B
7708	5322 130 41983	BC858B
7730	5322 130 41982	BC848B
7732	5322 130 41983	BC858B

16/9 identification panel **A** **C**

4822 265 41152	8P
4822 290 40295	8P
4822 265 20509	2P male
4822 264 40207	3P male



2457	4822 122 31797	22nF 10% 63V
2458	4822 122 31797	22nF 10% 63V
2459	4822 122 31797	22nF 10% 63V
2460	4822 122 31797	22nF 10% 63V



3457	4822 051 10153	15k 2% 0,25W
3459	4822 051 10103	10k 2% 0,25W
3462	4822 051 10153	15k 2% 0,25W
3463	4822 051 10103	10k 2% 0,25W
3464	4822 051 10472	4k7 2% 0,25W
3465	4822 051 10472	4k7 2% 0,25W
3466	4822 051 10151	150Ω 2% 0,25W
3467	4822 051 10101	100Ω 2% 0,25W
3468	4822 051 10101	100Ω 2% 0,25W
3469	4822 051 10223	22k 2% 0,25W
3470	4822 051 10823	82k 2% 0,25W
3471	4822 051 10008	0Ω 5% 0,25W

## Jumpers

4402	4822 051 10008	0Ω 5% 0,25W
4403	4822 051 10008	0Ω 5% 0,25W








6451	4822 130 80446	LL4148
6452	4822 130 80446	LL4148



7452	5322 209 10883	PCF8574P
7453	4822 130 42513	BC858C
7454	4822 130 42513	BC858C
7455	5322 130 41982	BC848B









High end-box (continued)

														
5% 63V	3138	4822 051 10124	120k 2% 0,25W	3252	4822 051 10751	750Ω 2% 0,25W	7100	4822 130 61207	BC848					
5% 63V	3139	4822 051 10101	100Ω 2% 0,25W	3253	4822 051 10751	750Ω 2% 0,25W	7102	4822 130 61207	BC848					
0% 63V	3140	4822 051 10224	220k 2% 0,25W	3254	4822 051 10241	240Ω 2% 0,25W	7103	5322 130 42012	BC858					
0% 63V	3141	4822 051 10223	22k 2% 0,25W	3255	4822 051 10471	470Ω 2% 0,25W	7104	4822 130 61207	BC848					
0% 63V	3142	4822 051 10104	100k 2% 0,25W	3256	4822 051 10102	1k 2% 0,25W	7105	5322 130 42012	BC858					
0% 63V	3143	4822 051 10104	100k 2% 0,25W	3260	4822 051 10822	8k2 2% 0,25W	7106	4822 130 61207	BC848					
0% 10V	3144	4822 051 10272	2k7 2% 0,25W	3261	4822 051 10472	4k7 2% 0,25W	7107	4822 130 61207	BC848					
0% 63V	3145	4822 051 10759	75Ω 2% 0,25W	3262	4822 111 41424	22Ω 5% 0,3W	7108	4822 130 40938	BC548					
0% 63V	3146	4822 051 20222	2k2 5% 0,1W	3263	4822 051 20222	2k2 5% 0,1W	7109	5322 130 42012	BC858A					
0% 63V	3147	4822 051 10479	47Ω 2% 0,25W	3264	4822 051 20222	2k2 5% 0,1W	7110	5322 130 42012	BC858					
0% 63V	3148	4822 051 10479	47Ω 2% 0,25W	3265	4822 051 20222	2k2 5% 0,1W	7111	4822 130 61207	BC848					
0% 63V	3151	4822 051 10271	270Ω 2% 0,25W	3270	4822 051 20222	2k2 5% 0,1W	7112	5322 130 42012	BC858					
0% 63V	3152	4822 051 10621	620Ω 2% 0,25W	3272	4822 051 20222	2k2 5% 0,1W	7113	5322 130 42012	BC858					
0% 50V	3153	4822 051 10122	1k2 2% 0,25W	3273	4822 051 20222	2k2 5% 0,1W	7116	4822 130 42131	BF550					
0% 50V	3155	4822 051 10221	220Ω 2% 0,25W	3274	4822 051 10223	22k 2% 0,25W	7117	4822 130 42131	BF550					
0% 50V	3156	4822 051 10221	220Ω 2% 0,25W	3275	4822 051 10102	1k 2% 0,25W	7119	5322 130 42136	BC848C					
0% 63V	3157	4822 051 10181	180Ω 2% 0,25W	3276	4822 051 10392	3k9 2% 0,25W	7120	5322 130 42136	BC848C					
0% 16V	3158	4822 051 10331	330Ω 2% 0,25W	3277	4822 051 20222	2k2 5% 0,1W	7121	5322 130 42136	BC848C					
0% 16V	3159	4822 051 20222	2k2 5% 0,1W	3278	4822 051 10103	10k 2% 0,25W	7122	5322 130 42136	BC848C					
0% 63V	3160	4822 051 10241	240Ω 2% 0,25W	3279	4822 051 10122	1k2 2% 0,25W	7123	5322 130 42012	BC858					
0% 63V	3161	4822 051 10101	100Ω 2% 0,25W	3280	4822 051 10102	1k 2% 0,25W	7124	5322 130 42136	BC848C					
0V	3162	4822 051 10221	220Ω 2% 0,25W	3281	4822 051 20222	2k2 5% 0,1W	7125	5322 130 42136	BC848C					
0% 63V	3163	4822 051 10471	470Ω 2% 0,25W	3289	4822 051 10561	560Ω 2% 0,25W	7156	4822 130 61207	BC848					
0% 63V	3164	4822 051 20222	2k2 5% 0,1W	3291	4822 051 10561	560Ω 2% 0,25W	7157	4822 130 61207	BC848					
0% 63V	3165	4822 051 10471	470Ω 2% 0,25W	3292	4822 051 10561	560Ω 2% 0,25W	7159	4822 130 61207	BC848					
0% 63V	3166	4822 051 20222	2k2 5% 0,1W	3293	4822 051 10561	560Ω 2% 0,25W	7160	5322 130 42012	BC858					
0% 6,3V	3168	4822 051 10101	100Ω 2% 0,25W	<b>Jumpers</b>				7200	4822 209 63645	SAA5231/V7				
0% 50V	3169	4822 051 10474	470k 2% 0,25W	4001	4822 051 10008	0Ω 5% 0,25W	7201	4822 209 63902	SAA9042P/A/MO A					
0% 63V	3170	4822 116 83319	287Ω 1% 0,125W	4003	4822 051 10008	0Ω 5% 0,25W	7202	4822 209 63893	LH2464-10					
0% 63V	3171	4822 051 10681	680Ω 2% 0,25W					7203	4822 209 63297	TDA2579B/N1				
0% 16V	3172	4822 051 10391	390Ω 2% 0,25W	5100	4822 157 63246	6μH trim.	7204	4822 209 63903	PCF80C51BH-3P/J265					
0,25W	3173	4822 051 10102	1k 2% 0,25W	5101	4822 157 63247	1,4μH trim.	7205	4822 209 63892	UPD91237C/CEO 28A					
0,25W	3174	4822 051 10102	1k 2% 0,25W	5102	4822 157 52403	3,3μH 10%	7206	4822 209 82341	PC74HCT04P					
0,1W	3175	4822 051 10683	68k 2% 0,25W	5103	4822 157 60147	2,2μH	7207	4822 209 82341	PC74HCT04P					
0,25W	3176	4822 051 10103	10k 2% 0,25W	5104	4822 157 60147	2,2μH	7209	4822 209 83163	LM833N					
0,1W	3178	4822 051 10122	1k2 2% 0,25W	5105	4822 157 60147	2,2μH	7210	4822 209 63894	PC74HCT4066P					
0,25W	3198	4822 051 10008	0Ω 5% 0,25W	5106	4822 157 60147	2,2μH	7211	4822 209 60199	MN6550B					
0,25W	3200	4822 052 10189	18Ω 5% 0,33W	5107	4822 157 60147	2,2μH	7212	4822 209 60199	MN6550B					
0,25W	3202	4822 051 10101	100Ω 2% 0,25W	5108	4822 157 60147	2,2μH	7213	4822 209 60199	MN6550B					
0,25W	3203	4822 051 10101	100Ω 2% 0,25W	5109	4822 157 60147	2,2μH	7214	5322 209 11588	PC74HCT195P					
0,25W	3204	4822 051 10103	10k 2% 0,25W	5110	4822 157 63503	4,6μH 6%	7215	5322 209 11588	PC74HCT195P					
0,25W	3205	4822 051 10102	1k 2% 0,25W	5150	4822 157 52224	15μH 10%	7216	5322 209 11588	PC74HCT195P					
0,25W	3206	4822 051 10332	3k3 2% 0,25W	5151	4822 157 60498	56μH 10%	7217	5322 209 11588	PC74HCT195P					
0,25W	3207	4822 051 10104	100k 2% 0,25W	5152	4822 157 60498	56μH 10%	7218	4822 209 72042	MC78L05ACP					
0,25W	3208	4822 051 10102	1k 2% 0,25W	5201	4822 157 52224	15μH 10%	7250	4822 209 60525	TMS4C1050-3N					
0,25W	3209	4822 051 10562	5k6 2% 0,25W	5202	4822 157 52138	27μH 10%	7251	4822 209 60525	TMS4C1050-3N					
0,25W	3210	4822 111 41424	22Ω 5% 0,3W	5251	4822 157 60147	2,2μH	7252	4822 209 60525	TMS4C1050-3N					
0,25W	3211	4822 051 10229	22Ω 2% 0,25W	5252	4822 157 60147	2,2μH	7253	4822 209 63891	SDA9060					
0,25W	3212	4822 051 10122	1k2 2% 0,25W					7254	4822 209 63897	TDA4563/V5				
0,25W	3213	4822 051 10561	560Ω 2% 0,25W	6102	5322 130 80119	BBY40	7255	4822 209 72042	MC78L05ACP					
0,25W	3214	4822 051 10303	30k 2% 0,25W	6103	5322 130 80119	BBY40								
0,25W	3215	4822 051 10102	1k 2% 0,25W	6106	4822 130 80888	BA682								
0,25W	3216	4822 051 10562	5k6 2% 0,25W	6107	4822 130 80888	BA682								
0,25W	3217	4822 051 10101	100Ω 2% 0,25W	6150	4822 130 80446	LL4148								
0,25W	3218	4822 051 10155	1M 5 5% 0,25W	6151	4822 130 80446	LL4148								
0,25W	3220	4822 051 10473	47k 2% 0,25W	6160	4822 130 80446	LL4148								
0,25W	3221	4822 051 10181	180Ω 2% 0,25W	6200	4822 130 80884	LLZ-C5V1								
0,25W	3222	4822 051 10683	68k 2% 0,25W	6201	4822 130 31253	BZX55-C2V4								
0,25W	3223	4822 051 10102	1k 2% 0,25W	6202	4822 130 80446	LL4148								
0,25W	3224	4822 051 20222	2k2 5% 0,1W	6250	4822 130 33706	BZX84-B5V1								
0,25W	3225	4822 051 10221	220Ω 2% 0,25W	6251	4822 130 80446	LL4148								
0,25W	3226	4822 051 10681	680Ω 2% 0,25W											
0,25W	3227	4822 051 10221	220Ω 2% 0,25W											
0,25W	3228	4822 100 20166	10k 30% LIN											
0,25W	3230	4822 051 10562	5k6 2% 0,25W											
0,25W	3231	4822 051 20222	2k2 5% 0,1W											
0,25W	3232	4822 051 10102	1k 2% 0,25W											
0,3W	3251	4822 051 10393	39k 2% 0,25W											

Second tuner PIP **J**

Secon

									
4822 265 40503	5P female gold plated	2391	4822 122 32927	220nF	3242	4822 050 11002	1k 1% 0,4W	3624	
4822 265 40472	10P female gold plated	2395	4822 122 32927	220nF	3250	4822 051 10911	910Ω 2% 0,25W	3625	
4822 265 20509	2P grey	2397	4822 122 32927	220nF	3265	4822 051 10104	100k 2% 0,25W	3630	
4822 265 20511	2P blue	2404	4822 122 31965	220pF 5% 63V	3270	4822 051 10103	10k 2% 0,25W	3631	
4822 265 30828	5P male	2405	4822 122 32862	10nF 80% 50V	3275	4822 051 10103	10k 2% 0,25W	3632	
4822 265 30899	5P	2409	4822 122 31965	220pF 5% 63V	3276	4822 051 10102	1k 2% 0,25W	3633	
<b>Various parts</b>		2410	4822 122 32862	10nF 80% 50V	3330	4822 051 10473	47k 2% 0,25W	3634	
1155	4822 320 40051	2413	4822 122 31765	100pF 5% 50V	3332	4822 051 10152	1k5 2% 0,25W	3635	
1201	4822 242 70304	2414	4822 122 32862	10nF 80% 50V	3335	4822 051 10271	270Ω 2% 0,25W	3636	
1212	4822 242 70736	2415	4822 122 31965	220pF 5% 63V	3336	4822 051 10682	6k8 2% 0,25W	3637	
1500	4822 212 23792	2430	4822 122 31947	100nF 20% 63V	3337	4822 050 11002	1k 1% 0,4W	3638	
1600	4822 210 50124	2432	4822 122 31947	100nF 20% 63V	3338	4822 051 10332	3k3 2% 0,25W	3997	
1610	4822 242 80275	2434	4822 122 31947	100nF 20% 63V	3340	4822 116 52253	2k 5% 0,5W	<b>Jumper</b>	
		2438	4822 121 42472	10nF 10% 50V	3341	4822 052 10129	12Ω 5% 0,33W	4003	
2103	4822 122 32444	2439	4822 121 41856	22nF 5% 250V	3345	4822 111 41424	22Ω 5% 0,3W	4007	
2105	4822 122 31766	2440	4822 122 31965	220pF 5% 63V	3353	4822 052 10568	5Ω6 5% 0,33W	4009	
2118	4822 122 31775	2441	4822 122 31727	470pF 5% 63V	3354	4822 051 10331	330Ω 2% 0,25W	4011	
2119	4822 122 31808	2442	4822 124 40242	1μF 20% 63V	3376	4822 051 10008	0Ω 5% 0,25W	4012	
2120	4822 122 31807	2445	5322 122 31842	330pF 5% 63V	3377	4822 051 10008	0Ω 5% 0,25W	4013	
2125	4822 122 32863	2447	4822 124 41643	100μF 20% 16V	3378	4822 051 10008	0Ω 5% 0,25W	4014	
2155	4822 122 32862	2448	4822 122 31947	100nF 20% 63V	3404	4822 051 10431	430Ω 2% 0,25W	4015	
2158	4822 122 32862	2604	4822 124 40195	150μF 20% 16V	3405	4822 051 10271	270Ω 2% 0,25W	4016	
2160	4822 121 42408	2614	4822 124 41506	47μF 20% 16V	3406	4822 051 10162	1k6 2% 0,25W	4017	
2161	4822 121 41854	2615	4822 124 41576	2,2μF 20% 50V	3407	4822 051 10332	3k3 2% 0,25W	4018	
2162	4822 122 31947	2616	4822 122 32927	220nF	3410	4822 051 10391	390Ω 2% 0,25W	4019	
2171	4822 122 31961	2618	4822 122 32442	10nF 50V	3411	4822 051 10361	360Ω 2% 0,25W	4020	
2172	4822 126 11175	2619	4822 124 40849	330μF 20% 16V	3412	4822 051 10751	750Ω 2% 0,25W	4021	
2176	4822 126 11175	2620	4822 122 32442	10nF 50V	3414	4822 051 10181	180Ω 2% 0,25W	4022	
2177	4822 122 31961	2621	4822 122 31797	22nF 10% 63V	3416	4822 051 10182	1k8 2% 0,25W	4024	
2180	4822 122 31768	2622	4822 122 31947	100nF 20% 63V	3434	4822 051 10473	47k 2% 0,25W	4025	
2181	4822 122 31768	2623	4822 122 31797	22nF 10% 63V	3436	4822 051 10473	47k 2% 0,25W	4026	
2185	4822 122 32863	2627	4822 122 32927	220nF	3437	4822 051 10101	100Ω 2% 0,25W	4028	
2187	4822 122 32863			3103	4822 051 10821	820Ω 2% 0,25W	4822 051 10513	51k 2% 0,25W	4029
2189	4822 122 31746	3104	4822 051 10821	820Ω 2% 0,25W	3438	4822 051 10513	51k 2% 0,25W	4046	
2196	4822 122 33105	3105	4822 051 10362	3k6 2% 0,25W	3440	4822 116 52222	390Ω 5% 0,5W	4047	
2197	4822 122 31385	3106	4822 116 52233	10k 5% 0,5W	3441	4822 051 10519	51Ω 2% 0,25W	4048	
2201	4822 122 31746	3107	4822 051 10103	10k 2% 0,25W	3442	4822 051 10919	91Ω 2% 0,25W	4049	
2202	4822 125 50045	3108	4822 051 10103	10k 2% 0,25W	3444	4822 116 52175	100Ω 5% 0,5W	4050	
2211	4822 122 31746	3108	4822 051 10103	10k 2% 0,25W	3446	4822 116 52175	100Ω 5% 0,5W	4402	
2212	4822 125 50045	3155	4822 051 10391	390Ω 2% 0,25W	3448	4822 051 10392	3k9 2% 0,25W	4415	
2220	5322 121 42661	3156	4822 051 10122	1k2 2% 0,25W	3450	4822 051 10431	430Ω 2% 0,25W	4417	
2222	4822 122 32542	3157	4822 100 11391	330Ω 30% LIN	3452	4822 051 10431	430Ω 2% 0,25W	4418	
2227	4822 122 31965	3158	4822 051 10759	75Ω 2% 0,25W	3454	4822 051 10431	430Ω 2% 0,25W	4419	
2230	4822 124 41578	3170	4822 051 10112	1k1 2% 0,25W	3464	4822 051 10102	1k 2% 0,25W	4420	
2232	4822 124 41678	3175	4822 051 10621	620Ω 2% 0,25W	3471	4822 051 10752	7k 5 2% 0,25W	4421	
2234	4822 122 33496	3196	4822 050 11002	1k 1% 0,4W	3472	4822 051 10103	10k 2% 0,25W	4631	
2235	4822 124 41578	3200	4822 051 10103	10k 2% 0,25W	3473	4822 051 10102	1k 2% 0,25W	4632	
2238	4822 121 42937	3201	4822 051 10103	10k 2% 0,25W	3474	4822 116 52277	39k 5% 0,5W	4634	
2239	4822 122 31947	3202	4822 051 10103	10k 2% 0,25W	3475	4822 051 10821	820Ω 2% 0,25W		
2250	4822 121 51115	3211	4822 051 10103	10k 2% 0,25W	3476	4822 051 10152	1k5 2% 0,25W		
2251	5322 122 31647	3212	4822 051 10103	10k 2% 0,25W	3600	4822 051 10103	10k 2% 0,25W		
2255	4822 122 31766	3214	4822 051 10102	1k 2% 0,25W	3601	4822 051 10103	10k 2% 0,25W		
2260	4822 122 31947	3220	4822 051 10512	5k1 2% 0,25W	3602	4822 051 10101	100Ω 2% 0,25W		
2270	4822 122 31947	3221	4822 116 52233	10k 5% 0,5W	3603	4822 051 10101	100Ω 2% 0,25W		
2330	4822 122 31768	3222	4822 051 10008	0Ω 5% 0,25W	3604	4822 052 10158	1Ω5 5% 0,33W		
2345	4822 124 41506	3227	4822 116 52299	7k 5 5% 0,5W	3605	4822 051 10223	22k 2% 0,25W		
2350	4822 124 40849	3228	4822 051 10472	4k7 2% 0,25W	3610	4822 100 11319	4k7 30% LIN		
2351	4822 124 41643	3231	4822 051 10302	3k 2% 0,25W	3611	4822 051 10332	3k3 2% 0,25W		
2380	4822 122 32927	3232	4822 051 10229	22Ω 2% 0,25W	3612	4822 051 10272	2k7 2% 0,25W		
2382	4822 122 32927	3233	4822 051 10152	1k5 2% 0,25W	3613	4822 051 10103	10k 2% 0,25W		
2384	4822 122 32927	3234	4822 051 10202	2k 2% 0,25W	3614	4822 051 10123	12k 2% 0,25W		
2390	4822 122 31947	3235	4822 051 10202	2k 2% 0,25W	3615	4822 051 10822	8k2 2% 0,25W		
		3236	4822 051 10511	510Ω 2% 0,25W	3616	4822 050 11002	1k 1% 0,4W		
		3237	4822 051 10153	15k 2% 0,25W	3617	4822 051 10102	1k 2% 0,25W		
		3238	4822 051 10333	33k 2% 0,25W	3618	4822 052 10568	5Ω6 5% 0,33W		
		3239	4822 100 11319	4k7 30% LIN	3619	4822 051 10471	470Ω 2% 0,25W		
		3241	4822 051 10302	3k 2% 0,25W	3620	4822 051 20222	2k2 5% 0,1W		
					3621	4822 051 10105	1M 5% 0,25W		
					3622	4822 051 10272	2k7 2% 0,25W		
									
								6301 4	
								6464 4	
								6471 4	

## Second tuner PIP (continued)



3624	4822 051 10272	2k7 2% 0,25W
3625	4822 051 10511	510Ω 2% 0,25W
3630	4822 051 10101	100Ω 2% 0,25W
3631	4822 051 10101	100Ω 2% 0,25W
3632	4822 051 10102	1k 2% 0,25W
3633	4822 051 10753	75k 2% 0,25W
3634	4822 051 10753	75k 2% 0,25W
3635	4822 051 10562	5k6 2% 0,25W
3636	4822 051 10911	910Ω 2% 0,25W
3637	4822 051 20183	18k 5% 0,1W
3638	4822 051 10362	3k6 2% 0,25W
3997	4822 051 10479	47Ω 2% 0,25W

## Jumper

4003	5322 122 31647	1nF 10% 63V
4007	4822 051 10008	0Ω 5% 0,25W
4009	4822 051 10008	0Ω 5% 0,25W
4011	4822 051 10008	0Ω 5% 0,25W
4012	4822 051 10008	0Ω 5% 0,25W
4013	4822 051 10008	0Ω 5% 0,25W
4014	4822 051 10008	0Ω 5% 0,25W
4015	4822 051 10008	0Ω 5% 0,25W
4016	4822 051 10008	0Ω 5% 0,25W
4017	4822 051 10008	0Ω 5% 0,25W
4018	4822 051 10008	0Ω 5% 0,25W
4019	4822 051 10008	0Ω 5% 0,25W
4020	4822 051 10008	0Ω 5% 0,25W
4021	4822 051 10008	0Ω 5% 0,25W
4022	4822 051 10008	0Ω 5% 0,25W
4024	4822 051 10008	0Ω 5% 0,25W
4025	4822 051 10008	0Ω 5% 0,25W
4026	4822 051 10008	0Ω 5% 0,25W
4028	4822 051 10008	0Ω 5% 0,25W
4029	4822 051 10008	0Ω 5% 0,25W
4046	4822 051 10008	0Ω 5% 0,25W
4047	4822 051 10008	0Ω 5% 0,25W
4048	4822 051 10008	0Ω 5% 0,25W
4049	4822 051 10008	0Ω 5% 0,25W
4402	4822 051 10008	0Ω 5% 0,25W
4415	4822 051 10008	0Ω 5% 0,25W
4417	4822 051 10008	0Ω 5% 0,25W
4418	4822 051 10008	0Ω 5% 0,25W
4419	4822 051 10008	0Ω 5% 0,25W
4420	4822 051 10008	0Ω 5% 0,25W
4421	4822 051 10008	0Ω 5% 0,25W
4631	4822 051 10008	0Ω 5% 0,25W
4632	4822 051 10008	0Ω 5% 0,25W
4634	4822 051 10008	0Ω 5% 0,25W

5118	4822 157 60435	10,3μH 6%
5155	4822 157 60433	7,2μH 6%
5157	4822 157 60434	9,4μH 6%
5170	4822 157 60432	10,3μH
5175	4822 157 60432	10,3μH
5190	4822 157 60432	10,3μH
5400	4822 157 50943	12μH 10%
5402	4822 157 50943	12μH 10%
5403	4822 157 52333	100μH
5406	4822 157 50943	12μH 10%
5408	4822 157 50943	12μH 10%
5410	4822 116 52184	18Ω 5% 0,5W







6301	4822 130 80446	LL4148
6464	4822 130 80235	BZX79-C3V3
6471	4822 130 81227	BZV55-F5V6








7103	5322 130 41982	BC848B
7105	5322 130 41982	BC848B
7125	4822 209 63927	TDA4554/V1
7200	5322 130 41982	BC848B
7210	5322 130 41982	BC848B
7233	5322 130 41982	BC848B
7234	5322 130 41982	BC848B
7235	5322 130 41982	BC848B
7330	5322 130 41982	BC848B
7335	5322 130 41982	BC848B
7337	5322 130 41982	BC848B
7338	5322 130 41982	BC848B
7350	4822 130 42616	BC818-40
7400	5322 130 41983	BC858B
7402	5322 130 41983	BC858B
7404	5322 130 41983	BC858B
7406	4822 209 62473	SDA9087
7470	4822 130 62844	BD826-16
7471	4822 130 62846	ON4590
7472	4822 130 62846	ON4590
7473	5322 130 41982	BC848B
7610	4822 209 30393	TDA8349A/N2
7630	4822 209 30395	SAA1300AQ/N6
7755	4822 209 63423	TDA2579A/N8/S2

NICAM sound module **K**










4822 265 41087 9P male 4822 265 41087 9P male					
<b>Various parts</b>				<b>Jumpers</b>	
1106	4822 242 72301	filter TH316BOM-20800DAF	2182	4822 126 11493	474nF 20% 50V
1106	4822 242 72303	filter TH316BQM	2185	4822 124 40433	47µF 20% 25V
1120	4822 242 80272	crystal 5,850 MHz	2186	4822 122 31797	22nF 10% 63V
1120	4822 242 80274	crystal 6,552 MHz	2187	4822 122 31759	18nF 10% 50V
1140	4822 242 80273	crystal 5,824 MHz	2187	4822 122 32442	10nF 10% 50V
					
2100	5322 122 31647	1nF 10% 63V	2188	4822 122 33608	39nF 10% 63V
2101	4822 122 31981	33nF ±0,5pF 50V	2188	4822 122 31797	22nF 10% 63V
2102	4822 122 31797	22nF 10% 63V	2189	4822 126 10171	2,7nF 5% 50V
2106	5322 122 31647	1nF 10% 63V	2190	4822 122 32999	2,2nF 5% 50V
2107	4822 122 32442	10nF 10% 50V	2191	4822 122 31773	560pF 5% 50V
2110	4822 122 32442	10nF 10% 50V	2192	4822 126 11493	474nF 20% 50V
2111	4822 124 22606	68µF 20% 16V	2197	4822 124 40272	33µF 20% 16V
2112	4822 126 11493	474nF 20% 50V	2198	4822 124 40272	33µF 20% 16V
2113	4822 126 11493	474nF 20% 50V	2199	4822 122 32442	10nF 10% 50V
2115	4822 122 31774	56pF 5% 50V			
2117	4822 125 50045	20pF trim.	3100	4822 051 10432	4k3 2% 0,25W
2118	4822 122 32504	15pF 5% 50V	3101	4822 051 10103	10k 2% 0,25W
2120	4822 122 31769	18pF 5% 50V	3102	4822 052 10129	12Ω 5% 0,33W
2120	4822 122 32444	33pF 5% 50V	3103	4822 051 10271	270Ω 2% 0,25W
2121	4822 122 32442	10nF 10% 50V	3104	4822 051 10111	110Ω 2% 0,25W
2122	4822 126 11493	474nF 20% 50V	3105	4822 051 10241	240Ω 2% 0,25W
2124	4822 122 31965	220pF 5% 63V	3106	4822 051 10471	470Ω 2% 0,25W
2125	4822 122 31965	220pF 5% 63V	3107	4822 051 10471	470Ω 2% 0,25W
2126	4822 122 32442	10nF 10% 50V	3110	4822 052 10278	207 5% 0,33W
2127	4822 122 32442	10nF 10% 50V	3112	4822 051 10154	150k 2% 0,25W
2128	4822 122 33496	100nF 10% 63V	3113	4822 051 10224	220k 2% 0,25W
2130	4822 122 33496	100nF 10% 63V	3115	4822 051 10511	510Ω 2% 0,25W
2132	4822 122 33496	100nF 10% 63V	3120	4822 051 10102	1k 2% 0,25W
2134	4822 122 33496	100nF 10% 63V	3122	4822 051 10393	39k 2% 0,25W
2136	4822 122 32442	10nF 10% 50V	3137	4822 051 10393	39k 2% 0,25W
2137	4822 126 11493	474nF 20% 50V	3139	4822 051 10471	470Ω 2% 0,25W
2138	4822 122 32442	10nF 10% 50V	3140	4822 051 10102	1k 2% 0,25W
2139	4822 122 31774	56pF 5% 50V	3142	4822 051 10331	330Ω 2% 0,25W
2140	4822 122 31961	68pF 5% 63V	3145	4822 052 10228	202 5% 0,33W
2141	4822 122 32444	33pF 5% 50V	3146	4822 051 10101	100Ω 2% 0,25W
2142	4822 122 32504	15pF 5% 50V	3147	4822 051 10101	100Ω 2% 0,25W
2143	4822 122 32504	15pF 5% 50V	3150	4822 052 10278	207 5% 0,33W
2144	4822 122 32504	15pF 5% 50V	3152	4822 051 10102	1k 2% 0,25W
2145	4822 122 33496	100nF 10% 63V	3153	4822 051 10103	10k 2% 0,25W
2150	4822 122 33496	100nF 10% 63V	3160	4822 051 10104	100k 2% 0,25W
2152	4822 122 33496	100nF 10% 63V	3161	4822 051 10104	100k 2% 0,25W
2154	4822 122 31772	47pF 5% 50V	3162	4822 051 10473	47k 2% 0,25W
2155	4822 125 50045	20pF trim.	3165	4822 052 10278	207 5% 0,33W
2156	4822 122 32442	10nF 10% 50V	3166	4822 116 52276	3k9 5% 0,5W
2158	4822 122 31972	39pF 5% 50V	3169	4822 051 10473	47k 2% 0,25W
2159	4822 122 31772	47pF 5% 50V	3170	4822 052 10278	207 5% 0,33W
2165	4822 124 41506	47µF 20% 16V	3175	4822 052 10109	10Ω 5% 0,33W
2166	4822 122 31797	22nF 10% 63V	3177	4822 051 10562	5k6 2% 0,25W
2170	4822 122 33496	100nF 10% 63V	3177	4822 051 10103	10k 2% 0,25W
2171	4822 124 41643	100µF 20% 16V	3178	4822 051 10102	1k 2% 0,25W
2175	4822 124 40433	47µF 20% 25V	3178	4822 051 10182	1k8 2% 0,25W
2176	4822 122 31797	22nF 10% 63V	3179	4822 051 10472	4k7 2% 0,25W
2177	4822 122 31759	18nF 10% 50V	3180	4822 051 10472	4k7 2% 0,25W
2177	4822 122 32442	10nF 10% 50V	3182	4822 051 10183	18k 2% 0,25W
2178	4822 122 33608	39nF 10% 63V	3184	4822 051 10912	9k1 2% 0,25W
2178	4822 122 31797	22nF 10% 63V	3184	4822 051 10682	6k8 2% 0,25W
2179	4822 126 10171	2,7nF 5% 50V	3185	4822 052 10109	10Ω 5% 0,33W
2180	4822 122 32999	2,2nF 5% 50V	3186	4822 051 10008	0Ω 5% 0,25W
2181	4822 122 31773	560pF 5% 50V	3187	4822 051 10562	5k6 2% 0,25W
					
				6154 4822 130 82352 BB215	
				6197 4822 130 81027 LLZ-C11	
					
				7100 5322 130 42136 BC848C	
				7101 4822 130 60514 BC859B	
				7110 4822 209 73558 TA8662N	
				7145 5322 209 10883 PCF8574P	
				7150 4822 209 61114 CF70123	
				7160 4822 130 61207 BC848	
				7165 4822 209 72545 SAA7220P/B	
				7170 4822 209 63899 TDA1543/N2/S6	
				7175 4822 209 83163 LM833N	
				7185 4822 209 83163 LM833N	
				7195 5322 209 10576 4053B	
				7198 4822 130 61207 BC848	

Picture tube panel **E**

4822 255 70264	pictuer tube socket	3739	4822 101 10963	47k 10% LIN	
4822 265 20509	2P male grey	3740	4822 050 21604	160k 1% 0,6W	
4822 265 40596	2P male Vg2	<b>Jumpers</b>			
4822 267 40985	6P male	4701	4822 051 10008	0Ω 5% 0,25W	
4822 265 41107	7P male	4702	4822 051 10008	0Ω 5% 0,25W	
4822 492 70788	spring fix IC	4703	4822 051 10008	0Ω 5% 0,25W	
4822 492 70788	spring fix IC	<hr/>			
4822 492 70788	spring fix IC				
4822 404 31199	bracket	5700	4822 157 63249	262LYF-0086K	
<hr/>		<hr/>			
					
2700	4822 126 11824	100pF 10% 1KV	6700	4822 130 80879	LLZ-C3V0
2701	4822 122 31971	10pF 10% 50V	6701	4822 130 80877	BAV103
2702	4822 122 31784	4,7nF 10% 50V	6702	4822 130 80877	BAV103
2704	4822 122 31746	1000pF 5% 50V	6703	4822 130 80877	BAV103
2705	4822 124 40272	33μF 20% 16V	6707	4822 130 82345	LLZ-C22
2706	4822 122 31797	22nF 10% 63V	6708	4822 130 32896	BYD33M
2707	4822 121 51562	33nF 10% 1600V	6709	4822 130 34379	BZX79-C27
2708	5322 122 31842	330pF 5% 63V	<hr/>		
2709	4822 124 23494	10μF 20% 250V			
2710	4822 122 31797	22nF 10% 63V	7704	4822 130 60373	BC856B
2711	4822 122 31971	10pF 10% 50V	7705	4822 209 30417	TDA6111Q/N2
2712	4822 122 31784	4,7nF 10% 50V	7706	4822 209 30417	TDA6111Q/N2
2713	4822 121 42068	33nF 10% 400V	7707	4822 209 30417	TDA6111Q/N2
2714	4822 122 31746	1000pF 5% 50V	<hr/>		
2715	4822 121 42068	33nF 10% 400V	<hr/>		
2720	4822 122 31825	27pF 10% 50V	<hr/>		
2721	4822 122 31971	10pF 10% 50V	<hr/>		
2722	4822 122 31784	4,7nF 10% 50V	<hr/>		
2724	4822 122 31746	1000pF 5% 50V	<hr/>		
2725	4822 122 31774	56pF 5% 50V	<hr/>		
2726	4822 122 31774	56pF 5% 50V	<hr/>		
2727	4822 122 31774	56pF 5% 50V	<hr/>		
<hr/>					
3700	4822 051 20222	2k2 5% 0,1W	<hr/>		
3701	4822 052 11108	1Ω 5% 0,5W	<hr/>		
3702	4822 051 10201	200Ω 2% 0,25W	<hr/>		
3703	4822 052 11108	1Ω 5% 0,5W	<hr/>		
3704	4822 051 10222	2k2 2% 0,25W	<hr/>		
3705	4822 051 10242	2k4 2% 0,25W	<hr/>		
3707	4822 051 10008	0Ω 5% 0,25W	<hr/>		
3708	4822 116 81434	1k 10%	<hr/>		
3709	4822 051 10124	120k 2% 0,25W	<hr/>		
3710	4822 051 10333	33k 2% 0,25W	<hr/>		
3712	4822 051 10201	200Ω 2% 0,25W	<hr/>		
3714	4822 051 20222	2k2 5% 0,1W	<hr/>		
3715	4822 051 10242	2k4 2% 0,25W	<hr/>		
3716	4822 050 21204	120k 1% 0,6W	<hr/>		
3718	4822 116 81434	1k 10%	<hr/>		
3719	4822 051 10333	33k 2% 0,25W	<hr/>		
3720	4822 051 10823	82k 2% 0,25W	<hr/>		
3722	4822 051 10201	200Ω 2% 0,25W	<hr/>		
3723	4822 051 10102	1k 2% 0,25W	<hr/>		
3724	4822 051 20222	2k2 5% 0,1W	<hr/>		
3725	4822 051 10242	2k4 2% 0,25W	<hr/>		
3726	4822 050 21204	120k 1% 0,6W	<hr/>		
3727	4822 111 50518	1k 5 5% 0,5W	<hr/>		
3728	4822 116 81434	1k 10%	<hr/>		
3730	4822 111 50518	1k 5 5% 0,5W	<hr/>		
3731	4822 052 10279	27Ω 5% 0,33W	<hr/>		
3732	4822 052 10189	18Ω 5% 0,33W	<hr/>		
3734	4822 050 21604	160k 1% 0,6W	<hr/>		
3735	4822 051 10103	10k 2% 0,25W	<hr/>		
3736	4822 051 10333	33k 2% 0,25W	<hr/>		
3737	4822 051 10153	15k 2% 0,25W	<hr/>		
3738	4822 053 12823	82k 5% 3W	<hr/>		



Scavem filter panel **Y**Scavem amplifier panel **Z**

4822 265 30351 5P male	4822 265 30497 5P male	5812 4822 157 63507 0,18μH
4822 264 40207 3P male	4822 265 40503 5P male gold plated	5813 4822 157 63507 0,18μH
4822 265 20464 2P		5814 4822 157 63507 0,18μH
4822 264 40207 3P male		5815 4822 157 63507 0,18μH
		
2804 4822 124 22427 47μF 20% 35V	2800 4822 122 31774 56pF 5% 50V	6802 4822 130 80446 LL4148
2805 4822 122 33496 100nF 10% 63V	2801 4822 124 40435 10μF 20% 50V	6803 5322 130 34337 BAV99
2806 4822 124 22427 47μF 20% 35V	2802 4822 124 41525 100μF 20% 25V	6804 5322 130 34337 BAV99
2807 4822 122 33496 100nF 10% 63V	2803 4822 122 32442 10nF 50V	6805 5322 130 34337 BAV99
2820 4822 122 33496 100nF 10% 63V	2808 4822 122 33496 100nF 10% 63V	6810 4822 130 80884 LLZ-C5V1
2822 4822 122 33496 100nF 10% 63V	2809 4822 122 32442 10nF 50V	6816 4822 130 80884 LLZ-C5V1
2824 4822 122 33496 100nF 10% 63V	2810 4822 122 32442 10nF 50V	
2825 4822 124 42269 100MU20% 100V	2811 4822 122 31808 150pF 10% 50V	7803 4822 130 61207 BC848
2826 4822 122 31727 470pF 5% 63V	2812 4822 122 33496 100nF 10% 63V	7804 4822 209 30404 NE592/N8
2827 4822 122 31727 470pF 5% 63V	2813 4822 122 33496 100nF 10% 63V	7805 4822 130 41594 PH2369
2832 4822 122 33496 100nF 10% 63V	2814 4822 122 32442 10nF 50V	7806 4822 130 61207 BC848
2833 4822 122 33496 100nF 10% 63V	2815 4822 122 32442 10nF 50V	7807 4822 130 61207 BC848
2834 4822 122 33496 100nF 10% 63V	2816 4822 122 31808 150pF 10% 50V	7809 5322 130 60646 BSR57
2835 4822 122 33496 100nF 10% 63V	2817 4822 122 32083 8,2pF 5% 50V	7818 4822 130 42705 BC847
2836 4822 122 33496 100nF 10% 63V	2818 4822 122 32083 8,2pF 5% 50V	7819 4822 130 61233 BC857
2837 4822 122 33496 100nF 10% 63V	2819 4822 122 32442 10nF 50V	7820 4822 130 42705 BC847
	2840 4822 122 33496 100nF 10% 63V	7821 4822 130 61233 BC857
3809 4822 052 10478 4Ω 5% 0,33W	2847 4822 124 42269 100μF 20% 100V	7825 5322 130 42012 BC858
3810 4822 052 10478 4Ω 5% 0,33W	2872 4822 122 31768 180pF 5% 50V	
3830 4822 053 10331 330Ω 5% 1W		
3831 4822 053 10331 330Ω 5% 1W	3800 4822 051 10821 820Ω 2% 0,25W	
3833 4822 051 10152 1k5 2% 0,25W	3801 4822 116 52214 200Ω 5% 0,5W	
3834 4822 051 10132 1k3 2% 0,25W	3807 4822 052 10478 4Ω 5% 0,33W	
3835 4822 051 10339 33Ω 2% 0,25W	3812 4822 051 10101 100Ω 2% 0,25W	
3836 4822 051 10479 47Ω 2% 0,25W	3813 4822 051 10103 10k 2% 0,25W	
3837 4822 116 52215 220Ω 5% 0,5W	3814 4822 051 10103 10k 2% 0,25W	
3838 4822 053 10331 330Ω 5% 1W	3815 4822 051 10123 12k 2% 0,25W	
3839 4822 053 10331 330Ω 5% 1W	3816 4822 051 10391 390Ω 2% 0,25W	
3841 4822 051 10152 1k5 2% 0,25W	3817 4822 051 10561 560Ω 2% 0,25W	
3842 4822 051 10132 1k3 2% 0,25W	3818 4822 051 10271 270Ω 2% 0,25W	
3843 4822 051 10339 33Ω 2% 0,25W	3819 4822 051 10271 270Ω 2% 0,25W	
3844 4822 051 10479 47Ω 2% 0,25W	3821 4822 051 10101 100Ω 2% 0,25W	
3845 4822 051 10479 47Ω 2% 0,25W	3822 4822 051 10182 1k8 2% 0,25W	
3846 4822 051 10569 56Ω 2% 0,25W	3823 4822 051 10182 1k8 2% 0,25W	
3847 4822 051 10479 47Ω 2% 0,25W	3824 4822 051 10339 33Ω 2% 0,25W	
3848 4822 051 10103 10k 2% 0,25W	3825 4822 051 10102 1k 2% 0,25W	
3850 4822 051 10431 430Ω 2% 0,25W	3826 4822 051 10102 1k 2% 0,25W	
3851 4822 051 10569 56Ω 2% 0,25W	3827 4822 051 10471 470Ω 2% 0,25W	
	3828 4822 051 10829 82Ω 2% 0,25W	
5830 4822 157 50965 15μH 10%	3829 4822 051 10682 6k8 2% 0,25W	
5831 4822 157 50965 15μH 10%	3852 4822 051 10331 330Ω 2% 0,25W	
5832 4822 157 50965 15μH 10%	3853 4822 051 10202 2k 2% 0,25W	
5833 4822 157 50965 15μH 10%	3854 4822 051 10331 330Ω 2% 0,25W	
	3855 4822 051 10202 2k 2% 0,25W	
7808 4822 130 61207 BC848	3856 4822 051 10331 330Ω 2% 0,25W	
7810 4822 130 41746 BD825	3857 4822 051 10202 2k 2% 0,25W	
7811 4822 130 42589 BF370	3858 4822 051 10331 330Ω 2% 0,25W	
7812 4822 130 41746 BD825	3859 4822 051 10202 2k 2% 0,25W	
7813 4822 130 41774 BD826	3870 4822 051 10822 8k2 2% 0,25W	
7814 4822 130 41746 BD825	3871 4822 051 10822 8k2 2% 0,25W	
7815 4822 130 41774 BD826	3872 4822 122 31768 180pF 5% 50V	
7816 4822 130 41746 BD825		
7817 4822 130 42589 BF370		
	<b>Jumpers</b>	
	4802 4822 051 10008 0Ω 5% 0,25W	
	4812 4822 051 10008 0Ω 5% 0,25W	
		
	5801 4822 157 50965 15μH 10%	
	5802 4822 157 50965 15μH 10%	
	5803 4822 157 50965 15μH 10%	