

# PARTS LIST

## PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual: electrical components having such features are identified by "△" in the Replacement Parts Lists.

The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

### "HOWTO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- |                 |                |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO.    |
| 3. PART NO.     | 4. DESCRIPTION |
| 5. CODE         | 6. QUANTITY    |

MARK ★ : SPARE PARTS-DELIVERY SECTION

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

## PICTURE TUBE

△ V1	VB59EAK7111*N	S	CRT Ass'y, 59 cm (25") (DV-5940H) with Deflection Yoke, Purity Magnet and Wedges	CW
△ V1	VB66EAK7111*N	S	CRT Ass'y, 66 cm (28") (DV-6632H) with Deflection Yoke, Purity Magnet and Wedges	CW
△ L1702	CCiLG0304WEV1	S	Degaussing (ADG) Coil Ass'y AW (DV-5940H)	AW
△ L1702	CCiLG0303WEV1	S	Degaussing (ADG) Coil Ass'y AU (DV-6632H)	AU
	MSPRT0001CEFJ	J	CRT Spring	AA

— End of PICTURE TUBE —

## PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

### MODEL DV-5940H

PWB-A	DUNTK7123CJV6	-	Mother Unit (with PWB-D)	—
PWB-B	DUNTK7002BMY8	-	CRT Socket Unit	—
PWB-C	DUNTK7140CJV2	-	Control Unit	—
PWB-D	DUNTK7125CJV3	-	IF Unit	—
PWB-E	DUNTK7126CJV1	-	TEXT Unit	—
PWB-F	DUNTK7129CJV1	-	NICAM/IGR Unit	—
PWB-G	DUNTK7128CJV1	-	21-Pin Unit	—

### MODEL DV-6632H

PWB-A	DUNTK7123CJV4	-	Mother Unit (with PWB-D)	—
PWB-B	DUNTK7002BMY6	-	CRT Socket Unit	—
PWB-C	DUNTK7124CJV2	-	Control Unit	—
PWB-D	DUNTK7125CJV3	-	IF Unit	—
PWB-E	DUNTK7126CJV0	-	TEXT Unit	—
PWB-F	DUNTK7129CJV1	-	NICAM/IGR Unit	—
PWB-G	DUNTK7128CJV1	-	21-Pin Unit	—

— End of P.W.B. ASS'Y —

## PWB-A DUNTK7123CJV6/V4 MOTHER UNIT

### TUNER

**NOTE: THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.**

△ TU200	VTUATEKB7-004	S	Tuner, UHF	BF
---------	---------------	---	------------	----

### INTEGRATED CIRCUITS

IC200	THiLM358P//-1	J		AC
IC201	RH-iX0249CEZZ	J	Zener IC	AE
IC300	VHiTDA7263/-1	S	Sound Output	AP
IC400	VHiLA7016//-1	J	Video Switch	AH
IC451	VHiLA7016//-1	J	Video Switch	AH
IC500	RH-iX1163BMZZ	S	Vertical Output	AM
IC600	VHiLM358P//-1	J	E-W Parabola Drive	AC
IC601	RH-iX1185BMZZ	S	+12V Regulator	AG
IC700	RH-iX1487BMZZ	S	Regulating Pulse Width Modulator	AK
△ IC701	RH-FX0101BMZZ	S	Photo Coupler	AE
△ IC702	RH-FX0101BMZZ	S	Photo Coupler	AE
△ IC751	VHiSE140N//-1	J		AG
IC800	RH-iX1566BMZZ	S	Multi Standard Video Signal Processor	BA
IC801	RH-iX1495BMZZ	S	1H Delay	AP
IC802	VHiTDA4566/-1	S	C.T.I	AS
IC803	RH-iX1460BMZZ	S	RGB Switch	AL
IC1001	RH-iX1481BMZZ	S	Microprocessor	AS

Ref. No. Part No. ★ Description Code

**PWB-A DUNTK7123CJV6/V4**  
**MOTHER UNIT (Continued)**

**INTEGRATED CIRCUITS (Continued)**

IC1002	CH-iX1456CJH9	S	E2P-ROM (DV-5940H)	AP
IC1002	CH-iX1456CJH8	S	E2P-ROM (DV-6632H)	AP
IC1003	RH-iX1485BMZZ	S		AK
IC1004	CH-iX1412CJHH	S	EP ROM (DV-5940H)	AU
IC1004	CH-iX1412CJHG	S	EP ROM (DV-6632H)	AU
IC1005	VHiPST529C2-1	J		AD
IC1006	RH-iX1474BMZZ	S		AE
IC1007	RH-iX1475BMZZ	S	Shift Register	AE

**TRANSISTORS**

Q200	VS2SC2412KQ-1	J	2SC2412	AA
Q300	VS2SC2412KQ-1	J	2SC2412	AA
Q400	VS2SC2412KQ-1	J	2SC2412	AA
Q402	VS2SC2412KQ-1	J	2SC2412	AA
Q403	VS2SC2412KQ-1	J	2SC2412	AA
Q501	RH-TX0102BMZZ	S	BC338	AB
△ Q600	VS2SD1546//2E	J	2SD1546	AN
Q601	VS2SC2271-D1A	J	2SC2271	AD
Q602	VS2SA1037KQ-1	J	2SA1037	AA
Q603	VS2SD1913S/1E	J	2SD1913S	AD
Q606	VS2SC2412KQ-1	J	2SC2412	AA
△ Q700	VS2SD1546//2E	J	2SD1546	AN
△ Q701	VS2SC2412KQ-1	J	2SC2412	AA
△ Q702	VS2SA1037KQ-1	J	2SA1037	AA
Q751	VS2SD1913S/1E	J	2SD1913S	AD
Q752	RH-TX0112BMZZ	S	BC636	AB
Q753	VS2SC2412KQ-1	J	2SC2412	AA
Q754	VS2SA1037KQ-1	J	2SA1037	AA
Q803	VS2SA1037KQ-1	J	2SA1037	AA
Q804	RH-TX0102BMZZ	S	BC338	AB
Q805	VS2SA1037KQ-1	J	2SA1037	AA
Q806	VS2SC2412KQ-1	J	2SC2412	AA
Q807	VS2SC2412KQ-1	J	2SC2412	AA
Q808	VS2SC2412KQ-1	J	2SC2412	AA
Q809	VS2SC2412KQ-1	J	2SC2412	AA
Q1000	VS2SC2412KQ-1	J	2SC2412	AA
Q1001	VS2SC2412KQ-1	J	2SC2412	AA
Q1002	VS2SC2412KQ-1	J	2SC2412	AA
Q1004	VS2SC2412KQ-1	J	2SC2412	AA
Q1005	VS2SC2412KQ-1	J	2SC2412	AA
Q1006	VS2SC2412KQ-1	J	2SC2412	AA
Q1007	VS2SC2412KQ-1	J	2SC2412	AA
Q1008	VS2SA1037KQ-1	J	2SA1037	AA
Q1009	VS2SC2412KQ-1	J	2SC2412	AA

Ref. No. Part No. ★ Description Code

**DIODES**

D200	RH-DX0045BMZZ	S	1N4148	AA
D202	RH-DX0045BMZZ	S	1N4148	AA
D300	RH-DX0045BMZZ	S	1N4148	AA
D301	RH-DX0045BMZZ	S	1N4148	AA
D452	RH-EX0409BMZZ	S	Zener Diode	AA
D453	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D454	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D455	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D456	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D461	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D462	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D465	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D500	RH-DX0501BMZZ	S	1N4004	AA
D501	RH-EX0437BMZZ	S	Zener Diode, 12V	AC
D502	RH-DX0501BMZZ	S	1N4004	AA
D506	RH-DX0045BMZZ	S	1N4148	AA
D509	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D510	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D511	RH-EX0417BMZZ	S	Zener Diode, 12V	AA
D513	RH-EX0421BMZZ	S	Zener Diode	AA
D600	RH-DX0512BMZZ	S	1N4936	AB
D601	RH-DX0512BMZZ	S	1N4936	AB
D602	RH-DX0512BMZZ	S	1N4936	AB
D603	RH-DX0299BMZZ	S	BY228	AE
D604	RH-DX0301BMZZ	S	BY299	AD
D605	RH-DX0511BMZZ	S	1N4935	AB
D606	RH-DX0045BMZZ	S	1N4148	AA
D608	RH-DX0045BMZZ	S	1N4148	AA
D609	RH-DX0045BMZZ	S	1N4148	AA
D610	RH-EX0408BMZZ	S	Zener Diode, 5.1V	AB
D611	RH-DX0045BMZZ	S	1N4148	AA
D612	RH-DX0045BMZZ	S	1N4148	AA
D613	RH-DX0045BMZZ	S	1N4148	AA
D615	RH-DX0045BMZZ	S	1N4148	AA
D616	RH-DX0045BMZZ	S	1N4148	AA
D617	RH-DX0045BMZZ	S	1N4148	AA
△ D701	RH-DX0299BMZZ	S	BY228	AE
△ D703	RH-EX0478BMZZ	S	Zener Diode	AB
△ D704	RH-EX0423BMZZ	S	Zener Diode	AB
△ D705	RH-DX0045BMZZ	S	1N4148	AA
△ D706	RH-DX0126CEZZ	J		AC
△ D707	RH-DX0045BMZZ	S	1N4148	AA
△ D708	RH-EX0477BMZZ	S	Zener Diode	AB
△ D709	RH-DX0045BMZZ	S	1N4148	AA
△ D712	RH-DX0502BMZZ	S	1N4005	AA
△ D713	RH-DX0045BMZZ	S	1N4148	AA
D751	RH-DX0514BMZZ	S	MR852	AC
D752	RH-DX0511BMZZ	S	1N4935	AB
D753	RH-DX0514BMZZ	S	MR852	AC
D754	RH-DX0246CEZZ	J		AD
D755	RH-DX0045BMZZ	S	1N4148	AA
D756	RH-EX0408BMZZ	S	Zener Diode, 5.1V	AB
D757	RH-DX0045BMZZ	S	1N4148	AA
D758	RH-DX0045BMZZ	S	1N4148	AA
D759	RH-DX0045BMZZ	S	1N4148	AA

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

## PWB-A DUNTK7123CJV6/V4 MOTHER UNIT (Continued)

### DIODES (Continued)

D760	RH-DX0045BMZZ	S	1N4148	AA
D761	RH-DX0045BMZZ	S	1N4148	AA
D762	RH-DX0045BMZZ	S	1N4148	AA
D800	RH-DX0045BMZZ	S	1N4148	AA
D801	RH-DX0045BMZZ	S	1N4148	AA
D802	RH-DX0045BMZZ	S	1N4148	AA
D803	RH-DX0045BMZZ	S	1N4148	AA
D805	RH-DX0045BMZZ	S	1N4148	AA
D806	RH-DX0045BMZZ	S	1N4148	AA
D808	RH-DX0045BMZZ	S	1N4148	AA
D1000	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1001	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1002	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1003	RH-DX0045BMZZ	S	1N4148	AA
D1004	RH-DX0045BMZZ	S	1N4148	AA
D1006	VHDDAN202K/-1	J	DAN202K	AB
D1007	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1008	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1009	RH-DX0045BMZZ	S	1N4148	AA
D1010	RH-DX0045BMZZ	S	1N4148	AA
D1011	RH-DX0045BMZZ	S	1N4148	AA
D1012	RH-DX0045BMZZ	S	1N4148	AA
D1013	RH-DX0045BMZZ	S	1N4148	AA
D1014	RH-DX0045BMZZ	S	1N4148	AA
D1015	RH-DX0045BMZZ	S	1N4148	AA
D1016	RH-DX0045BMZZ	S	1N4148	AA
D1019	RH-EX0409BMZZ	S	Zener Diode, 5.6V	AA
D1020	RH-DX0045BMZZ	S	1N4148	AA

### PACKAGED CIRCUITS

X801	RCRSB0200BMZZ	S	Crystal, 17.73 MHz	AG
X1000	RCRSB0209BMZZ	S	Crystal, 11.0592 MHz	AG

### COIL AND TRANSFORMERS

L200	VP-DF120K0000	J	Coil, 12 $\mu$ H	AB
L201	VP-DF120K0000	J	Coil, 12 $\mu$ H	AB
L204	VP-DF120K0000	J	Coil, 12 $\mu$ H	AB
L300	RCiLP0110CEZZ	J	Coil	AC
L301	RCiLP0110CEZZ	J	Coil	AC
L600	RCiLP0105CEZZ	J	Coil, 1mH	AG
L601	RCiLP0104CEZZ	J	Coil	AG
L602	RCiLZ0599CEZZ	J	Coil	AG
L603	RCiLP0088CEZZ	J	Coil, 3.3 $\mu$ H	AG
△ L700	VP-CF3R3K0000	J	Coil, 3.3 $\mu$ H	AB
△ L701	VP-CF1R0M0000	J	Coil, 1 $\mu$ H	AB
L751	RCiLP0213BMZZ	S	Coil	AF
△ T600	RTRNF2021BMZZ	S	Flyback Trans. (FBT)	BH
T601	RTRNZ0447CEZZ	J	Horizontal Drive Trans.	AK
△ T700	RTRNZ0519BMZZ	S	Switching Mode Trans.	AW

### CAPACITORS

C200	VCKYTV1HF104Z	J	0.1	50V	Ceramic	AA
C201	VCEAGA1CW107M	J	100	16V	Electrolytic	AB
C202	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C203	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C204	VCEAGA1HW105M	J	1	50V	Electrolytic	AC
C205	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C206	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C208	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C209	VCEAGA1HW106M	J	10	50V	Electrolytic	AC
C210	VCEAGA1CW337M	J	330	16V	Electrolytic	AC
C211	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C212	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C213	VCEAGA1HW105M	J	1	50V	Electrolytic	AC
C214	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C302	VCEAGA1HW476M	J	47	50V	Electrolytic	AB
C303	VCEAGA1HW474M	J	0.47	50V	Electrolytic	AA
C304	VCEAGA1HW476M	J	47	50V	Electrolytic	AB
C305	VCEAGA1HW474M	J	0.47	50V	Electrolytic	AA
C306	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C307	VCEAGA1HW477M	J	470	50V	Electrolytic	AD
C308	VCEAGA1VW108M	J	1000	35V	Electrolytic	AD
C309	VCEAGA1VW108M	J	1000	35V	Electrolytic	AD
C310	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C311	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C312	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C359	VCEAGA1CW106M	J	10	16V	Electrolytic	AA
C360	VCEAGA1CW106M	J	10	16V	Electrolytic	AA
C400	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C403	VCEAGA1CW107M	J	100	16V	Electrolytic	AB
C404	VCKYTV1HF104Z	J	0.1	50V	Ceramic	AA
C405	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C406	VCEAGA1HW225M	J	2.2	50V	Electrolytic	AB
C407	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C408	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C409	RC-FZ9473BMNJ	S	0.047	63V	Mylar	AC
C410	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C411	VCEAGA0JW107M	J	100	6.3V	Electrolytic	AB
C413	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C414	RC-FZ9332BMNJ	S	3300p	63V	Mylar	AB
C415	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C416	VCCSTV1HL101J	J	100p	50V	Ceramic	AA
C417	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C420	VCEAGA1HW105M	J	1	50V	Electrolytic	AC
C421	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C422	VCEAGA1AW337M	J	330	10V	Electrolytic	AB
C423	VCKYTV1HF103Z	J	0.01	50V	Ceramic	AA
C424	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C426	VCKYTV1HF104Z	J	0.1	50V	Ceramic	AA
C427	VCCSTV1HL101J	J	100p	50V	Ceramic	AA
C430	VCCSTV1HL101J	J	100p	50V	Ceramic	AA
C451	VCCSTV1HL101J	J	100p	50V	Ceramic	AA
C452	VCEAGA1CW476M	J	47	16V	Electrolytic	AB
C457	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C458	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB
C459	RC-FZ9104BMNJ	S	0.1	63V	Mylar	AB

**Ref. No. Part No. ★ Description Code**

**PWB-A DUNTK7123CJV6/V4**  
**MOTHER UNIT (Continued)**

**CAPACITORS (Continued)**

C460	VCEAGA1CW107M	J 100	16V	Electrolytic	AB
C461	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA
C500	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
C501	VCEAGA1HW107M	J 100	50V	Electrolytic	AC
C502	RC-FZ9684BMNJ	S 0.68	63V	Mylar	AD
C504	RC-FZ9474BMNJ	S 0.47	63V	Mylar	AD
C506	VCEAGA1VW107M	J 100	35V	Electrolytic	AC
C507	RC-FZ9823BMNJ	S 0.082	63V	Mylar	AB
C510	VCKYTV1HF473Z	J 0.047	50V	Ceramic	AB
C511	VCEAGH1VW228M	J 2200	35V	Electrolytic	AG
C512	VCEAGA1CW107M	J 100	16V	Electrolytic	AB
C513	RC-FZ9105BMNJ	S 1	63V	Mylar	AD
C514	VCCSTV1HL471J	J 470p	50V	Ceramic	AA
C600	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
C601	VCEAGA1CW106M	J 10	16V	Electrolytic	AA
C602	VCEAGA1CW106M	J 10	16V	Electrolytic	AA
C603	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C604	RC-FZ9222BMNJ	S 2200p	63V	Mylar	AB
C605	RC-FZ9473BMNJ	S 0.047	63V	Mylar	AC
C606	VCKYPA1HB102K	J 1000p	50V	Ceramic	AA
C607	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
C610	VCFPPD3ZA113J	S 0.011	1.8kV	Polypro Film	AF
C611	VCQPSC2GA273K	J 0.027	400V	Polypro Film	AB
C614	RC-FZ6474BMNJ	S 0.47	250V	Mylar	AE
C615	RC-FZ6564BMNJ	S 0.56	250V	Mylar	AF
C616	VCCSPA1HL221J	J 220p	50V	Ceramic	AA
C617	RC-FZ6564BMNJ	S 0.56	250V	Mylar	AF
C618	RC-FZ6474BMNJ	S 0.47	250V	Polypro Film	AE
C619	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
C620	VCKYPA2HB121K	J 120p	500V	Ceramic	AA
C621	VCKYPA2HB102K	J 1000p	500V	Ceramic	AA
C622	RC-FZ7104BMNJ	S 0.1	400V	Polypro Film	AD
C623	VCEAGA1HW475M	J 4.7	50V	Electrolytic	AB
C625	RC-FZ7224BMNJ	S 0.22	400V	Mylar	AE
C626	VCEAGA1HW106M	J 10	50V	Electrolytic	AC
C627	VCEAGA2EW106M	J 10	250V	Electrolytic	AC
C628	VCEAGA1CW107M	J 100	16V	Electrolytic	AB
C629	VCEAGA1EW477M	J 470	25V	Electrolytic	AD
C630	VCKYPA2HB471K	J 470p	500V	Ceramic	AA
C631	VCKYPA2HB471K	J 470p	500V	Ceramic	AA
C632	VCKYPA2HB471K	J 470p	500V	Ceramic	AA
C633	VCEAGH1VW228M	J 2200	35V	Electrolytic	AG
C638	VCEAGA1HW475M	J 4.7	50V	Electrolytic	AB
C639	RC-KZ0024CEZZ	J 1000p	2kV	Ceramic	AC
C640	RC-FZ9474BMNJ	S 0.047	63V	Mylar	AD
C641	VCKYPA1HF103Z	J 0.01	50V	Ceramic	AA
△ C702	RC-EZ0109BMZZ	S 330	385V	Electrolytic	AW
△ C703	VCEAGA1EW337M	J 330	25V	Electrolytic	AC
△ C704	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
△ C705	RC-FZ9222BMNJ	S 2200p	63V	Mylar	AV
△ C706	RC-KZ0036CEZZ	J 330p	2kV	Ceramic	AB
△ C707	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB

**Ref. No. Part No. ★ Description Code**

**CAPACITORS (Continued)**

△ C708	RC-FZ9102BMNJ	S 1000p	63V	Mylar	AB
△ C709	VCKYPA2HB102K	J 1000p	500V	Ceramic	AA
△ C710	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
△ C711	VCFPPD3CA472H	J 4700p	1.6kV	Polypro Film	AD
△ C712	VCEAGA1HW107M	J 100	50V	Electrolytic	AC
△ C714	VCEAGA1HW475M	J 4.7	50V	Electrolytic	AB
△ C715	VCEAGA0JW107M	J 100	6.3V	Electrolytic	AB
△ C749	RC-KZ0156CEZZ	J 3300p	4kV	Ceramic	AG
C751	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C752	VCKYPA2HB221K	J 220p	500V	Ceramic	AA
C753	VCKYPA2HB221K	J 220p	500V	Ceramic	AA
C754	VCEAGA1CW228M	J 2200	16V	Electrolytic	AE
C755	VCEAGA1CW108M	J 1000	16V	Electrolytic	AD
C756	RC-KZ0035CEZZ	J 220p	2kV	Ceramic	AB
C757	RC-FZ9103BMNJ	S 0.01	63V	Mylar	AB
C758	VCEAGA0JW107M	J 100	6.3V	Electrolytic	AB
C759	RC-KZ0035CEZZ	J 220p	2kV	Ceramic	AB
C760	RC-EZ0258CEZZ	J 100	200V	Electrolytic	AH
C761	VCEA4H2DN107M	J 100	200V	Electrolytic	AG
C762	VCEAGH1VW228M	J 2200	35V	Electrolytic	AG
C763	VCKYPA2HB221K	J 220p	500V	Ceramic	AA
C764	VCEAGA1AW108M	J 1000	10V	Electrolytic	AC
C765	VCEAGA1CW106M	J 10	16V	Electrolytic	AA
C802	VCCCTV1HH121J	J 120P	50V	Ceramic	AA
C803	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA
C804	VCEAGA1HW105M	J 1	50V	Electrolytic	AC
C805	VCEAGA1HW105M	J 1	50V	Electrolytic	AC
C806	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA
C807	VCEAGA0JW107M	J 100	6.3V	Electrolytic	AB
C808	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C809	VCEAGA1CW226M	J 22	16V	Electrolytic	AB
C810	VCEAGA1CW226M	J 22	16V	Electrolytic	AB
C811	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C812	VCEAGA0JW107M	J 100	6.3V	Electrolytic	AB
C813	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA
C814	VCEAGA1HW475M	J 4.7	50V	Electrolytic	AB
C815	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C816	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C817	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C818	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C819	VCCSTV1HL101J	J 100p	50V	Ceramic	AA
C820	VCCSTV1HL101J	J 100p	50V	Ceramic	AA
C821	VCKYTV1HB331K	S 330p	50V	Ceramic	AA
C822	VCKYTV1HB221K	S 220p	50V	Ceramic	AA
C823	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C824	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C825	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA
C826	VCEAGA1CW107M	J 100	16V	Electrolytic	AB
C827	VCEAGA1CW106M	J 10	16V	Electrolytic	AA
C828	VCEAGA1CW476M	J 47	16V	Electrolytic	AB
C829	VCEAGA0JW476M	J 47	6.3V	Electrolytic	AB
C831	VCEAGA1CW476M	J 47	16V	Electrolytic	AB
C832	VCCCTV1HH680J	J 68p	50V	Ceramic	AA
C833	VCEAGA1CW107M	J 100	16V	Electrolytic	AB
C834	VCKYTV1HF103Z	J 0.01	50V	Ceramic	AA

Ref. No. Part No. ★ Description Code

**PWB-A DUNTK7123CJV6/V4  
MOTHER UNIT (Continued)**

**CAPACITORS (Continued)**

C835	VCEAGA1CW476M	J 47	16V	Electrolytic	AB
C836	VCKYTV1HB221K	S 220p	50V	Ceramic	AA
C837	VCKYTV1HB391K	J 390p	50V	Ceramic	AA
C838	VCKYTV1HB391K	J 390p	50V	Ceramic	AA
C839	VCKYTV1HF104Z	J 0.1	50V	Ceramic	AA
C840	VCKYTV1HF104Z	J 0.1	50V	Ceramic	AA
C842	VCCSTV1HL101J	J 100p	50V	Ceramic	AA
C845	VCCCTV1HH470J	J 47p	50V	Ceramic	AA
C846	VCCCTV1HH470J	J 47p	50V	Ceramic	AA
C847	VCCCTV1HH470J	J 47p	50V	Ceramic	AA
C1000	VCEAGA0JW107M	J 100	6.3V	Electrolytic	AB
C1001	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1003	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1004	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1005	VCEAGA1HW106M	J 10	50V	Electrolytic	AC
C1006	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1007	VCEAGA1HW106M	J 10	50V	Electrolytic	AC
C1008	VCCCTV1HH220J	J 22p	50V	Ceramic	AA
C1009	VCCCTV1HH220J	J 22p	50V	Ceramic	AA
C1010	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1011	RC-FZ9104BMNJ	S 0.1	63V	Mylar	AB
C1012	VCEAGA1CW226M	J 22	16V	Electrolytic	AB
C1013	VCEAGA1HW225M	J 2.2	50V	Electrolytic	AB
C1016	VCKYTV1HF104Z	J 0.1	50V	Ceramic	AA

**RESISTORS**

△ R200	RR-XZ0212BMZZ	S 10	1/2W	Fuse Resistor	AB
R201	VRS-TV1JD101J	J 100	1/16W	Metal Oxide	AA
△ R202	RR-XZ0212BMZZ	S 10	1/2W	Fuse Resistor	AB
R203	VRD-RA2EE331J	J 330	1/4W	Carbon	AA
R207	VRS-TV1JD332J	J 3.3k	1/16W	Metal Oxide	AA
R208	VRS-TV1JD332J	J 3.3k	1/16W	Metal Oxide	AA
R209	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R210	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R211	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R212	VRD-RA2BE101J	J 100	1/8W	Carbon	AA
R213	VRD-RA2BE101J	J 100	1/8W	Carbon	AA
R214	VRD-RA2HD392J	J 3.9k	1/2W	Carbon	AA
R215	VRD-RA2HD392J	J 3.9k	1/2W	Carbon	AA
R216	VRD-RA2HD392J	J 3.9k	1/2W	Carbon	AA
R217	VRD-RA2HD392J	J 3.9k	1/2W	Carbon	AA
R218	VRS-TV1JD681J	J 680	1/16W	Metal Oxide	AA
R219	VRS-TV1JD101J	J 100	1/16W	Metal Oxide	AA
R220	VRS-TV1JD101J	J 100	1/16W	Metal Oxide	AA
R229	VRS-TV1JD000J	J 0			AA
R231	VRS-TV1JD823J	J 82k	1/16W	Metal Oxide	AA
R232	VRS-TV1JD563J	J 56k	1/16W	Metal Oxide	AA
R300	VRS-TV1JD123J	J 12k	1/16W	Metal Oxide	AA
R301	VRS-TV1JD123J	J 12k	1/16W	Metal Oxide	AA
R303	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA

Ref. No. Part No. ★ Description Code

**RESISTORS (Continued)**

R305	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA
R306	VRD-RA2EE470J	J 47	1/4W	Carbon	AA
R307	VRD-RA2HD152J	J 1.5k	1/2W	Carbon	AA
R308	VRD-RA2EE470J	J 47	1/4W	Carbon	AA
R309	VRD-RA2HD152J	J 1.5k	1/2W	Carbon	AA
△ R310	RR-XZ0208BMZZ	S 4.7	1/2W	Fuse Resistor	AA
△ R311	RR-XZ0208BMZZ	S 4.7	1/2W	Fuse Resistor	AA
R312	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R313	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA
R314	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA
R315	VRS-TV1JD100J	J 10	1/16W	Metal Oxide	AA
△ R363	RR-XZ0112BMZZ	S 10	1/3W	Fuse Resistor	AB
R377	VRD-RA2BE103J	J 10k	1/8W	Carbon	AA
R401	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R404	VRS-TV1JD122J	J 1.2k	1/16W	Metal Oxide	AA
R405	VRS-TV1JD273J	J 27k	1/16W	Metal Oxide	AA
R406	VRS-TV1JD822J	J 8.2k	1/16W	Metal Oxide	AA
R407	VRS-TV1JD681J	J 680	1/16W	Metal Oxide	AA
R408	VRS-TV1JD100J	J 10	1/16W	Metal Oxide	AA
R409	VRD-RA2BE561J	J 560	1/8W	Carbon	AA
R410	VRD-RA2BE331J	J 330	1/8W	Carbon	AA
R411	VRS-TV1JD513J	J 51k	1/16W	Metal Oxide	AA
R412	VRD-RA2BE331J	J 330	1/8W	Carbon	AA
△ R413	RR-XZ0212BMZZ	S 10	1/2W	Fuse Resistor	AB
R421	VRS-TV1JD473J	J 47k	1/16W	Metal Oxide	AA
R422	VRS-TV1JD561J	J 560	1/16W	Metal Oxide	AA
R423	VRS-TV1JD122J	J 1.2k	1/16W	Metal Oxide	AA
R425	VRS-TV1JD750J	J 75	1/16W	Metal Oxide	AA
R426	VRS-TV1JD560J	J 56	1/16W	Metal Oxide	AA
△ R475	RR-XZ0112BMZZ	S 10	1/3W	Fuse Resistor	AB
R500	VRD-RA2BE682J	J 6.8k	1/8W	Carbon	AA
R501	VRD-RA2BE153J	J 15k	1/8W	Carbon	AA
R502	VRD-RA2BE562J	J 5.6k	1/8W	Carbon	AA
△ R503	RR-XZ0200BMZZ	S 1	1/2W	Fuse Resistor	AB
R504	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA
R505	VRS-TV1JD823J	J 82k	1/16W	Metal Oxide	AA
R508	VRS-TV1JD392J	J 3.9k	1/16W	Metal Oxide	AA
R509	VRS-TV1JD123J	J 12k	1/16W	Metal Oxide	AA
R510	VRN-VV3ABR82J	J 0.82	1W	Metal Film	AA
R511	VRS-VV3DB151J	J 150	2W	Metal Oxide	AA
R512	VRS-VV3DB271J	J 270	2W	Metal Oxide	AA
R513	VRD-RA2BE101J	J 100	1/8W	Carbon	AA
R514	VRD-RA2BE101J	J 100	1/8W	Carbon	AA
R517	VRS-TV1JD123J	J 12k	1/16W	Metal Oxide	AA
R518	VRS-TV1JD221J	J 220	1/16W	Metal Oxide	AA
R520	VRS-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R521	VRS-TV1JD472J	J 4.7k	1/16W	Metal Oxide	AA
R522	VRD-RA2HD122J	J 1.2k	1/2W	Carbon	AA
R523	VRD-RA2HD122J	J 1.2k	1/2W	Carbon	AA
R600	VRD-RA2BE682J	J 6.8k	1/8W	Carbon	AA
R601	VRS-TV1JD103J	J 10k	1/16W	Metal Oxide	AA
R602	VRS-TV1JD184J	J 180k	1/16W	Metal Oxide	AA
R605	VRD-TV1JD102J	J 1k	1/16W	Metal Oxide	AA
R606	VRS-TV1JD274J	J 270k	1/16W	Metal Oxide	AA
R607	VRD-RA2EE225J	J 2.2M	1/4W	Carbon	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------	----------	----------	---	-------------	------

**PWB-A DUNTK7123CJV6/V4**  
**MOTHER UNIT (Continued)**

**RESISTORS (Continued)**

R608	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R609	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R610	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
△ R611	RR-XZ0204BMZZ	S	2.2 1/2W	Fuse Resistor	AB
R612	VRW-KX3HC682K	J	6.8k 5W	Cement	AD
R613	VRD-RA2HD472J	J	4.7k 1/2W	Carbon	AA
R614	VRS-TV1JD270J	J	27 1/16W	Metal Oxide	AA
△ R615	RR-XZ0200BMZZ	S	1 1/2W	Fuse Resistor	AB
R617	VRW-KQ4AC100K	S	10 10W	Cement	AD
R618	VRD-RA2HD102J	J	1k 1/2W	Carbon	AA
R619	VRD-RA2HD390J	J	39 1/2W	Carbon	AA
△ R620	RR-XZ0219BMZZ	S	39 1/2W	Fuse Resistor	AB
R621	VRD-RA2HD472J	J	4.7k 1/2W	Carbon	AA
R622	VRD-RA2HD562J	J	5.6k 1/2W	Carbon	AA
R623	VRD-RA2HD103J	J	10k 1/2W	Carbon	AA
R625	VRD-RA2HD102J	J	1k 1/2W	Carbon	AA
△ R626	RR-XZ0200BMZZ	S	1 1/2W	Fuse Resistor	AB
R628	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R629	VRD-RA2HD103J	J	10k 1/2W	Carbon	AA
△ R631	RR-XZ0200BMZZ	S	1 1/2W	Fuse Resistor	AB
R632	VRD-RA2BE103J	J	10k 1/8W	Carbon	AA
R634	VRD-RA2HD220J	J	22 1/2W	Carbon	AA
R637	VRN-VV3AB1R2J	J	1.2 1W	Metal Film	AA
R638	VRD-RA2BE473J	J	47k 1/8W	Carbon	AA
R639	VRS-TV1JD683J	J	68k 1/16W	Metal Oxide	AA
R640	VRD-RA2BE222J	J	2.2k 1/8W	Carbon	AA
R641	VRS-TV1JD563J	J	56k 1/16W	Metal Oxide	AA
R645	VRN-VV3AB1R0J	J	1 1W	Metal Film	AA
R647	VRD-RA2EE102J	J	1k 1/4W	Carbon	AA
R648	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R649	VRS-TV1JD223J	J	22k 1/16W	Metal Oxide	AA
R650	VRD-RA2EE155J	J	1.5M 1/4W	Carbon	AA
R651	VRS-TV1JD682J	J	6.8k 1/16W	Metal Oxide	AA
R652	VRS-TV1JD333J	J	33k 1/16W	Metal Oxide	AA
R653	VRS-TV1JD105J	J	1M 1/16W	Metal Oxide	AA
R657	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R658	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R659	VRS-TV1JD561J	J	560 1/16W	Metal Oxide	AA
R663	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA
R664	VRD-RA2BE561J	J	3.9k 1/8W	Carbon	AA
△ R701	VRS-TV1JD123J	J	12k 1/16W	Metal Oxide	AA
△ R702	VRD-RA2BE562J	J	5.6k 1/8W	Carbon	AA
△ R705	VRD-RA2EE474J	J	470k 1/4W	Carbon	AA
R706	VRS-TV1JD392J	J	3.9k 1/16W	Metal Oxide	AA
△ R707	VRD-RA2HD271J	J	270 1/2W	Carbon	AA
△ R708	VRD-RA2HD102J	J	1k 1/2W	Carbon	AA
△ R710	VRS-VV3DB104J	J	100k 2W	Metal Oxide	AB
△ R711	VRS-VV3DB473J	S	47k 2W	Metal Oxide	AB
△ R712	VRS-VV3DB120J	J	12 2W	Metal Oxide	AA
△ R714	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA
△ R715	VRN-VV3DBR56J	J	0.56 2W	Metal Film	AA
△ R716	VRS-TV1JD101J	J	100 1/16W	Metal Oxide	AA

**RESISTORS (Continued)**

△ R718	VRS-TV1JD472J	J	4.7k 1/16W	Metal Oxide	AA
△ R719	VRS-TV1JD472J	J	4.7k 1/16W	Metal Oxide	AA
△ R720	VRS-TV1JD223J	J	22k 1/16W	Metal Oxide	AA
△ R721	VRD-RA2HD273J	J	27k 1/2W	Carbon	AA
△ R722	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
△ R723	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
△ R724	VRD-RA2HD101J	J	100 1/2W	Carbon	AA
△ R725	VRN-VV3DBR56J	J	0.56 2W	Metal Film	AA
△ R729	VRC-UA2HG825K	J	8.2M 1/2W	Solid	AA
△ R730	VRC-UA2HG825K	J	8.2M 1/2W	Solid	AA
R753	VRD-RA2EE221J	J	220 1/4W	Carbon	AA
R754	VRD-RA2EE221J	J	220 1/4W	Carbon	AA
R755	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R756	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R757	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R758	VRD-RA2EE101J	J	100 1/4W	Carbon	AA
R759	VRD-RA2HD221J	J	220 1/2W	Carbon	AA
R760	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA
R761	VRS-VV3LB331J	J	330 3W	Metal Oxide	AB
R762	VRD-RA2HD222J	J	2.2k 1/2W	Carbon	AA
R764	VRN-VV3DB2R2J	J	2.2 2W	Metal Film	AB
R765	VRD-RA2BE103J	J	10k 1/8W	Carbon	AA
R766	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA
R767	VRD-RA2BE102J	J	1k 1/8W	Carbon	AA
R768	VRD-RA2HD221J	J	220 1/2W	Carbon	AA
R769	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R770	VRN-KT3LB1R5J	J	1.5 3W	Metal Film	AC
R771	VRD-RA2HD221J	J	220 1/2W	Carbon	AA
R800	VRS-TV1JD683J	J	68k 1/16W	Metal Oxide	AA
△ R801	RR-XZ0108BMZZ	S	4.7 1/3W	Fuse Resistor	AB
R802	VRS-TV1JD101J	J	100 1/16W	Metal Oxide	AA
R805	VRS-TV1JD122J	J	1.2k 1/16W	Metal Oxide	AA
△ R806	RR-XZ0112BMZZ	S	10 1/3W	Fuse Resistor	AB
R807	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R808	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R809	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R810	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R821	VRS-TV1JD331J	J	330 1/16W	Metal Oxide	AA
R822	VRS-TV1JD331J	J	330 1/16W	Metal Oxide	AA
R823	VRS-TV1JD331J	J	330 1/16W	Metal Oxide	AA
R824	VRS-TV1JD221J	J	220 1/16W	Metal Oxide	AA
R825	VRS-TV1JD473J	J	47k 1/16W	Metal Oxide	AA
R826	VRS-TV1JD473J	J	47k 1/16W	Metal Oxide	AA
R827	VRS-TV1JD102J	J	1k 1/16W	Metal Oxide	AA
R830	VRS-TV1JD391J	J	390 1/16W	Metal Oxide	AA
R831	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R832	VRS-TV1JD223J	J	22k 1/16W	Metal Oxide	AA
R833	VRS-TV1JD331J	J	330 1/16W	Metal Oxide	AA
R834	VRS-TV1JD271J	J	270 1/16W	Metal Oxide	AA
R835	VRS-TV1JD121J	J	120 1/16W	Metal Oxide	AA
R836	VRS-TV1JD103J	J	10k 1/16W	Metal Oxide	AA
R837	VRS-TV1JD562J	J	5.6k 1/16W	Metal Oxide	AA
R838	VRD-RA2HD470J	J	47 1/2W	Carbon	AA
△ R839	RR-XZ0112BMZZ	S	10 1/3W	Fuse Resistor	AB
R840	VRS-TV1JD183J	J	18k 1/16W	Metal Oxide	AA

Ref. No. Part No. ★ Description Code

**PWB-A DUNTK7123CJV6/V4**  
**MOTHER UNIT (Continued)**

**RESISTORS (Continued)**

R841	VRS-TV1JD472J	J	4.7k	1/16W	Metal Oxide	AA
R842	VRS-TV1JD472J	J	4.7k	1/16W	Metal Oxide	AA
R843	VRS-TV1JD471J	J	470	1/16W	Metal Oxide	AA
△ R844	RR-XZ0112BMZZ	S	10	1/3W	Fuse Resistor	AB
R845	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R846	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R847	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R848	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R849	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R850	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R851	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R852	VRS-TV1JD102J	J	1k	1/16W	Metal Oxide	AA
R853	VRS-TV1JD391J	J	390	1/16W	Metal Oxide	AA
R854	VRS-TV1JD391J	J	390	1/16W	Metal Oxide	AA
R855	VRS-TV1JD104J	J	100k	1/16W	Metal Oxide	AA
R1000	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R1001	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R1002	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1003	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1004	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1005	VRS-TV1JD472J	J	4.7k	1/16W	Metal Oxide	AA
R1006	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1007	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1008	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1009	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1010	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1011	VRS-TV1JD472J	J	4.7k	1/16W	Metal Oxide	AA
R1013	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1014	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1015	VRS-TV1JD222J	J	2.2k	1/16W	Metal Oxide	AA
R1016	VRS-TV1JD223J	J	22k	1/16W	Metal Oxide	AA
R1017	VRS-TV1JD823J	J	82k	1/16W	Metal Oxide	AA
R1018	VRS-TV1JD472J	J	4.7k	1/16W	Metal Oxide	AA
R1019	VRS-TV1JD334J	J	330k	1/16W	Metal Oxide	AA
R1020	VRS-TV1JD101J	J	100	1/16W	Metal Oxide	AA
R1023	VRS-TV1JD123J	J	12k	1/16W	Metal Oxide	AA
R1024	VRS-TV1JD123J	J	12k	1/16W	Metal Oxide	AA
R1025	VRS-TV1JD100J	J	10	1/16W	Metal Oxide	AA
R1026	VRS-TV1JD100J	J	10	1/16W	Metal Oxide	AA
R1027	VRS-TV1JD100J	J	10	1/16W	Metal Oxide	AA
R1028	VRS-TV1JD100J	J	10	1/16W	Metal Oxide	AA
R1029	VRS-TV1JD100J	J	10	1/16W	Metal Oxide	AA
					(DV-5940H)	
R1030	VRD-RA2BE101J	J	100	1/8W	Carbon	AA
R1031	VRS-TV1JD821J	J	820	1/16W	Metal Oxide	AA
R1032	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R1033	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1035	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1036	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1037	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1038	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1039	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA

Ref. No. Part No. ★ Description Code

**RESISTORS (Continued)**

R1040	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R1041	VRS-TV1JD122J	J	1.2k	1/16W	Metal Oxide	AA
R1043	VRS-TV1JD392J	J	3.9k	1/16W	Metal Oxide	AA
R1044	VRS-TV1JD104J	J	100k	1/16W	Metal Oxide	AA
R1045	VRS-TV1JD681J	J	680	1/16W	Metal Oxide	AA
R1046	VRS-TV1JD332J	J	3.3k	1/16W	Metal Oxide	AA
R1047	VRS-TV1JD123J	J	12k	1/16W	Metal Oxide	AA
R1048	VRD-RA2BE101J	J	100	1/8W	Carbon	AA
					(DV-5940H)	
R1049	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1051	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R1052	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1053	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1054	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1055	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1056	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1057	VRS-TV1JD103J	J	10k	1/16W	Metal Oxide	AA
R1058	VRS-TV1JD271J	J	270	1/16W	Metal Oxide	AA
R1059	VRS-TV1JD473J	J	47k	1/16W	Metal Oxide	AA

**MISCELLANEOUS PARTS**

FB300	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB301	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB600	RBLN-0010CEZZ	J	Ferrite Bead	AC
FB601	RBLN-0010CEZZ	J	Ferrite Bead	AC
△ FB700	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB751	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB752	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB755	RBLN-0037CEZZ	J	Ferrite Bead	AB
△ F751	QFS-J2521GEZZ	J	IC Protector	AE
△ F753	QFS-J4021GEZZ	J	IC Protector	AE
P300	QPLGN0441CEZZ	J	Plug 4-pin, (E), (S)	AB
P301	QPLGN0541CEZZ	J	Plug 5-pin, (C)	AB
P401	QPLGN0741CEZZ	J	Plug 7-pin, (SA)	AC
P402	QPLGN0641CEZZ	J	Plug 6-pin, (SB)	AB
P403	QPLGN0341CEZZ	J	Plug 3-pin, (SC)	AA
P600	QPLGN0505CEZZ	J	Plug 5-pin, (F)	AB
P601	QPLGN0441CEZZ	J	Plug 4-pin, (H)	AB
P602	QPLGN0160CEZZ	J	Plug 1-pin, (L2)	AB
△ P700	QPLGN0304CEZZ	J	Plug 3-pin, (B)	AB
P800	QPLGN0641CEZZ	J	Plug 6-pin, (K)	AB
P1000	QPLGN1141CEZZ	J	Plug 11-pin, (D)(DV-5940H)	AB
P1000	QPLGN1041CEZZ	J	Plug 10-pin, (D)(DV-6632H)	AC
SC200	QSOCN1285CEZZ	J	Socket 12-pin, (FA)	AD
SC300	QSOCN1285CEZZ	J	Socket 12-pin, (AA)	AD
SC301	QSOCN1285CEZZ	J	Socket 12-pin, (AB)	AD
SC400	QSOCN0885CEZZ	J	Socket 8-pin, (TA)	AC
SC401	QSOCN1285CEZZ	J	Socket 12-pin, (TB)	AD
SC1000	QSOCZ0100BMZZ	S	Socket 11-pin	AB
SC1001	QSOCZ0101BMZZ	S	Socket	AD

**Ref. No. Part No. ★ Description Code**

**PWB-B DUNTK7002BMY8/Y6  
CRT SOCKET UNIT**

**INTEGRATED CIRCUIT**

IC1801 RH-iX1416BMZZ S R.G.B. Output AS

**DIODES**

D1811 RH-DX0045BMZZ S 1N4148 AA  
D1821 RH-DX0045BMZZ S 1N4148 AA  
D1831 RH-DX0045BMZZ S 1N4148 AA  
D1870 RH-DX0501BMZZ S 1N4004 AA

**COIL**

L1801 VP-CF3R3K0000 J Coil, 3.3μH AB

**CAPACITORS**

C1801 RC-KZ0029CEZZ J 0.01 Ceramic AC  
C1802 VCEAGH2EW476M J 47 250V Electrolytic AE  
C1803 VCKYPA1HF103Z J 0.01 50V Ceramic AA  
C1804 VCEAGA1CW106M J 10 16V Electrolytic AA  
C1810 VCCSPA1HL150J J 15p 50V Ceramic AA  
C1820 VCCSPA1HL150J J 15p 50V Ceramic AA  
C1830 VCCSPA1HL150J J 15p 50V Ceramic AA  
C1876 VCKYPA1HF103Z J 0.01 50V Ceramic AA  
C1877 RC-KZ0023CEZZ J 4700p Ceramic AD  
C1878 VCCSD41HL680J J 68p 50V Ceramic AA  
C1879 VCCSD41HL680J J 68p 50V Ceramic AA  
C1880 VCCSD41HL680J J 68p 50V Ceramic AA

**RESISTORS**

R1810 VRD-RA2BE221J J 220 1/8W Carbon AA  
R1812 VRD-RA2HD393J J 39k 1/2W Carbon AA  
R1813 VRC-MA2HG272K J 2.7k 1/2W Solid AA  
R1814 VRD-RA2BE102J J 1k 1/8W Carbon AA  
R1820 VRD-RA2BE221J J 220 1/8W Carbon AA  
R1822 VRD-RA2HD393J J 39k 1/2W Carbon AA  
R1823 VRC-MA2HG272K J 2.7k 1/2W Solid AA  
R1824 VRD-RA2BE102J J 1k 1/8W Carbon AA  
R1830 VRD-RA2BE221J J 220 1/8W Carbon AA  
R1832 VRD-RA2HD393J J 39k 1/2W Carbon AA  
R1833 VRC-MA2HG272K J 2.7k 1/2W Solid AA  
R1834 VRD-RA2BE102J J 1k 1/8W Carbon AA  
R1871 VRD-RA2BE100J J 10 1/8W Carbon AA  
R1872 VRG-RL2HB221J J 220 1/2W Fuse Resistor AB  
R1873 RR-XZ0017CEZZ J 10 1/2W Fuse Resistor AB  
R1874 VRD-RA2HD473J J 47k 1/2W Carbon AA  
R1899 VRD-RA2HD221J J 220 1/2W Carbon AA

**MISCELLANEOUS PARTS**

P1801 QPLGN0441CEZZ J Plug 4-pin, (H) AB  
P1802 QPLGN0641CEZZ J Plug 6-pin, (K) AB  
P1803 QTIPM0017CEFM J Tip, (L3) AA  
P1805 QTIPM0017CEFM J Tip, (L2) AA  
SC1801 QSOCV0919CEZZ J CRT Socket AH

— End of PWB-B —

**Ref. No. Part No. ★ Description Code**

**PWB-C DUNTK7140CJV2 (DV-5940H)  
CONTROL UNIT**

**INTEGRATED CIRCUITS**

IC1100 VHILM358P//-1 S OPC Amp. AC  
IC1700 RH-iX1429BMZZ S +5V (Stand-by) Regulator AE

**TRANSISTORS**

Q1100 VS2SC1815GW-1 J 2SC1815(GW) AB  
Q1101 VS2SC1815GW-1 J 2SC1815(GW) AB  
Q1102 VS2SA1015Y/1E J 2SA1015(Y) AC

**DIODES**

D1102 RH-DX0045BMZZ S 1N4148 AA  
D1105 RH-PX0291CEZZ J LED, Stand-by On AC  
D1106 RH-PX0291CEZZ J LED, Stereo On-Timer AC  
D1107 RH-PX0291CEZZ J LED, OPC AC  
D1108 RH-DX0045BMZZ S 1N4148 AA  
D1109 RH-DX0045BMZZ S 1N4148 AA  
D1400 RH-EX0412BMZZ S Zener Diode, 7.5V AB  
D1401 RH-EX0412BMZZ S Zener Diode, 7.5V AB  
D1402 RH-EX0412BMZZ S Zener Diode, 7.5V AB  
△ D1700 RH-DX0240CEZZ J AB  
△ D1701 RH-DX0240CEZZ J AB  
△ D1702 RH-DX0240CEZZ J AB  
△ D1703 RH-DX0240CEZZ J AB  
△ VA1700 RH-VX0033CEZZ J Varistor AD

**PACKAGED CIRCUIT**

△ PR1700 RMPTP0028CEZZ J Positive Coefficient Thermistor Degaussing AG

**COILS**

△ L1700 RCiLF0108BMZZ S Line Filter AL  
L1701 RCiLF0108BMZZ S Line Filter AL

**CAPACITORS**

C1100 VCEAGA1HW475M J 4.7 50V Electrolytic AB  
C1101 VCEAGA1CW106M J 10 16V Electrolytic AA  
C1102 VCEAGA1CW106M J 10 16V Electrolytic AA  
C1103 VCKYPA1HF103Z J 0.01 50V Ceramic AA  
C1104 VCEAGA1CW106M J 10 16V Electrolytic AA  
C4105 VCEAGA1CW106M J 10 16V Electrolytic AA  
C1106 VCEAGA1CW106M J 10 16V Electrolytic AA  
C1107 VCEAGA0JW107M J 100 6.3V Electrolytic AB  
C1400 VCKYPA1HF103Z J 0.01 50V Ceramic AA  
C1401 VCKYPA1HF103Z J 0.01 50V Ceramic AA  
C1402 VCCSPA1HL101J J 100p 50V Ceramic AA  
△ C1700 RC-FZ0145BMZZ S 0.1 AC300V Mylar AD  
△ C1701 RC-KZ0029CEZZ J 0.01 AC250V Ceramic AC



Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

## PWB-C DUNTK7140CJV2 (DV-5940H) CONTROL UNIT (Continued)

### CAPACITORS (Continued)

C1702	RC-FZ0145BMZZ	S	0.1 AC300V Mylar	AD
△ C1703	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC
△ C1704	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC
△ C1705	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC
△ C1706	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC
C1707	VCEAGA1CW477M	J	470 16V Electrolytic	AC
C1708	VCEAGA1AW477M	J	470 10V Electrolytic	AC

### RESISTORS

R1103	VRD-RA2BE224J	J	220k 1/8W Carbon	AA
R1104	VRD-RA2BE103J	J	10k 1/8W Carbon	AA
R1105	VRD-RA2BE273J	J	27k 1/8W Carbon	AA
R1106	VRD-RA2BE123J	J	12k 1/8W Carbon	AA
R1107	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R1108	VRD-RA2BE332J	J	3.3k 1/8W Carbon	AA
R1109	VRD-RA2BE103J	J	10k 1/8W Carbon	AA
R1111	VRD-RA2BE152J	J	1.5k 1/8W Carbon	AA
R1112	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
R1113	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R1114	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R1115	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R1116	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R1117	VRD-RA2BE681J	J	680 1/8W Carbon	AA
R1118	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R1119	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R1120	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R1121	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
R1123	VRD-RA2BE151J	J	150 1/8W Carbon	AA
R1125	VRD-RA2BE150J	J	15 1/8W Carbon	AA
R1300	VRD-RA2HD391J	J	390 1/2W Carbon	AA
R1301	VRD-RA2HD391J	J	390 1/2W Carbon	AA
R1400	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R1401	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
R1402	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
R1403	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
△ R1700	VRW-KQ41C4R7K	S	4.7 15W Cement	AE
R1701	VRS-VV3AB101J	J	100 1W Metal Oxide	AA

### SWITCHES

△ S1100	QSW-K0090CEZZ	J	Volume Up	AC
△ S1101	QSW-K0090CEZZ	J	Volume Down	AC
△ S1102	QSW-K0090CEZZ	J	Channel Up	AC
△ S1103	QSW-K0090CEZZ	J	Channel Down	AC
△ S1104	QSW-K0090CEZZ	J	OPC	AC
△ S1700	QSW-P0566CEZZ	J	Main's Power	AN

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

### MISCELLANEOUS PARTS

E1100	UBATZ0003CEZZ	J	Solar Cell, OPC	AG
F1700	QFS-C2050BMZZ	S	Fuse, T2AH	AD
FH1700	QFSDH1009CEZZ	J	Fuse Holder	AA
FH1701	QFSDH1010CEZZ	J	Fuse Holder	AA
J1300	QJAKJ0014AEZZ	J	Jack, Head Phone	AQ
J1400	QJAKZ0101BMZZ	S	Jack, AV Input	AH
P1100	QPLGN1041CEZZ	J	Plug 10-pin, (D)	AC
P1300	QPLGN0441CEZZ	J	Plug 4-pin, (S)	AB
P1301	QPLGN0441CEZZ	J	Plug 4-pin, (E)	AB
P1400	QPLGN0541CEZZ	J	Plug 5-pin, (C)	AB
P1700	QPLGN0304CEZZ	J	Plug 3-pin, (A)	AB
P1701	QPLGN0207CEZZ	J	Plug 2-pin, (G)	AA
P1702	QPLGN0304CEZZ	J	Plug 3-pin, (B)	AB
RMC1100	RRMCU0201BMZZ	S	Remote Control Receiver	AN
	LHLDZ1525CEZZ	J	LED Holder	AB

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>PWB-C DUNTK7124CJV2 (DV-6632H)</b>					<b>RESISTORS</b>				
<b>CONTROL UNIT</b>									
<b>INTEGRATED CIRCUIT</b>									
IC1700	RH-iX1429BMZZ	S	+5V (Stand-by) Regulator	AE	R1112	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
<b>TRANSISTORS</b>					R1113	VRD-RA2BE221J	J	220 1/8W Carbon	AA
Q1100	VS2SC1815GW-1	J	2SC1815(GW)	AB	R1114	VRD-RA2BE221J	J	220 1/8W Carbon	AA
Q1102	VS2SA1015Y/1E	J	2SA1015(Y)	AC	R1115	VRD-RA2BE221J	J	220 1/8W Carbon	AA
<b>DIODES</b>					R1117	VRD-RA2BE681J	J	680 1/8W Carbon	AA
D1102	RH-DX0045BMZZ	S	1N4148	AA	R1118	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
D1105	RH-PX0291CEZZ	J	LED, Stand-by On	AC	R1119	VRD-RA2BE221J	J	220 1/8W Carbon	AA
D1106	RH-PX0291CEZZ	J	LED, Stereo On-Timer	AC	R1120	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
D1400	RH-EX0412BMZZ	S	Zener Diode, 7.5V	AB	R1123	VRD-RA2BE151J	J	150 1/8W Carbon	AA
D1401	RH-EX0412BMZZ	S	Zener Diode, 7.5V	AB	R1300	VRD-RA2HD391J	J	390 1/2W Carbon	AA
D1402	RH-EX0412BMZZ	S	Zener Diode, 7.5V	AB	R1301	VRD-RA2HD391J	J	390 1/2W Carbon	AA
△ D1700	RH-DX0240CEZZ	J		AB	R1400	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
△ D1701	RH-DX0240CEZZ	J		AB	R1401	VRD-RA2BE102J	J	1k 1/8W Carbon	AA
△ D1702	RH-DX0240CEZZ	J		AB	R1402	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
△ D1703	RH-DX0240CEZZ	J		AB	R1403	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
△ VA1700	RH-VX0033CEZZ	J	Varistor	AD	△ R1700	VRW-KQ41C4R7K	S	4.7 15W Cement	AE
<b>PACKAGED CIRCUIT</b>					R1701	VRS-VV3AB101J	J	100 1W Metal Oxide	AA
△ PR1700	RMPTP0028CEZZ	J	Positive Coefficient Thermistor Degaussing	AG	<b>SWITCHES</b>				
<b>COILS</b>					△ S1100	QSW-K0079GEZZ	J	Volume Up	AB
△ L1700	RCiLF0108BMZZ	S	Line Filter	AL	△ S1101	QSW-K0079GEZZ	J	Volume Down	AB
△ L1701	RCiLF0108BMZZ	S	Line Filter	AL	△ S1102	QSW-K0079GEZZ	J	Channel Up	AB
<b>CAPACITORS</b>					△ S1103	QSW-K0079GEZZ	J	Channel Down	AB
C1105	VCEAGA1CW106M	J	10 16V Electrolytic	AA	△ S1700	QSW-P0566CEZZ	J	Main's Power	AN
C1107	VCEAGA0JW107M	J	100 6.3V Electrolytic	AB	<b>MISCELLANEOUS PARTS</b>				
C1400	VCKYPA1HF103Z	J	0.01 50V Ceramic	AA	△ F1700	QFS-C2050BMZZ	S	Fuse, T2AH	AD
C1401	VCKYPA1HF103Z	J	0.01 50V Ceramic	AA	FH1700	QFSDH1009CEZZ	J	Fuse Holder	AA
C1402	VCCSPA1HL101J	J	100p 50V Ceramic	AA	FH1701	QFSDH1010CEZZ	J	Fuse Holder	AA
C1409	VCKYPA1HF103Z	J	0.01 50V Ceramic	AA	△ J1300	QJAKJ0014AEZZ	J	Jack, Head Phone	AQ
△ C1700	RC-FZ0145BMZZ	S	0.1 AC300V Mylar	AD	△ J1400	QJAKZ0101BMZZ	S	Jack, AV Input	AH
△ C1701	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC	P1100	QPLGN1041CEZZ	J	Plug 10-pin, (D)	AC
△ C1702	RC-FZ0145BMZZ	S	0.1 AC300V Mylar	AD	P1300	QPLGN0441CEZZ	J	Plug 4-pin, (S)	AB
△ C1703	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC	P1301	QPLGN0441CEZZ	J	Plug 4-pin, (E)	AB
△ C1704	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC	P1400	QPLGN0541CEZZ	J	Plug 5-pin, (C)	AB
△ C1705	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC	△ P1700	QPLGN0304CEZZ	J	Plug 3-pin, (A)	AB
△ C1706	RC-KZ0029CEZZ	J	0.01 AC250V Ceramic	AC	△ P1701	QPLGN0207CEZZ	J	Plug 2-pin, (G)	AA
C1707	VCEAGA1CW477M	J	470 16V Electrolytic	AC	△ P1702	QPLGN0304CEZZ	J	Plug 3-pin, (B)	AB
C1708	VCEAGA1AW477M	J	470 10V Electrolytic	AC	RMC1100	RRMCU0201BMZZ	S	Remote Control Receiver	AN
					LHLDF1510BM00	S	LED Holder	AB	

Ref. No. Part No. ★ Description Code

**PWB-D DUNTK7125CJV3  
IF UNIT**

**INTEGRATED CIRCUIT**

IC1200 VHiTDA9814T-1 S PIF/SIF AX

**TRANSISTORS**

Q1200 VS2SC1906//1E J 2SC1906 AC  
Q1201 VS2SC1906//1E J 2SC1906 AC  
Q1202 VS2SC2412KQ-1 J 2SC2412 AA

**COIL AND TRANSFORMERS**

CF1202 RFiLCO023CEZZ J Ceramic Filter, 5.5 MHz AE  
L1200 VP-XF3R3K0000 J Coil, 3.3μH AB  
L1201 VP-XF1R2K0000 J Coil, 1.2μH AB  
L1202 VP-XF120K0000 J Coil, 12μH AB  
SF1200 RFiLCO115BMZZ S Surface Acoustic Wave Filter AN  
SF1201 RFiLCO192CEZZ J Surface Acoustic Wave Filter AH  
T1202 RCILD0232CEZZ J Coil AE

**CONTROL**

R1216 RVR-B1007AEZZ J 22k(B) RF-AGC AB

**CAPACITORS**

C1201 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C1202 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1203 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1204 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C1206 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1207 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C1208 RC-FZ9104BMNJ S 0.1 63V Mylar AB  
C1209 RC-FZ9224BMNJ S 0.22 63V Mylar AC  
C1210 VCEAGA1HW225M J 2.2 50V Electrolytic AB  
C1215 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1216 RC-FZ9104BMNJ S 0.1 63V Mylar AB  
C1217 VCEAGA1HW225M J 2.2 50V Electrolytic AB  
C1218 VCEAGA1HW225M J 2.2 50V Electrolytic AB  
C1219 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1220 VCEAGA1AW476M J 47 10V Electrolytic AA  
C1221 VCEAGA1CW476M J 47 16V Electrolytic AB  
C1222 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C1228 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C1231 RC-FZ9334BMNJ S 0.33 63V Mylar AC  
C1233 VCCCTV1HH471J J 470p 50V Ceramic AA

**RESISTORS**

R1200 VRS-TV1JD151J J 150 1/16W Metal Oxide AA  
R1202 VRS-TV1JD562J J 5.6k 1/16W Metal Oxide AA  
R1203 VRS-TV1JD222J J 2.2k 1/16W Metal Oxide AA

Ref. No. Part No. ★ Description Code

**RESISTORS (Continued)**

R1204 VRS-TV1JD471J J 470 1/16W Metal Oxide AA  
R1205 VRS-TV1JD270J J 27 1/16W Metal Oxide AA  
R1206 VRS-TV1JD151J J 150 1/16W Metal Oxide AA  
R1207 VRD-RA2EE221J J 220 1/4W Carbon AA  
R1208 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
R1209 VRD-RA2BE121J J 120 1/8W Carbon AA  
R1210 VRS-TV1JD562J J 5.6k 1/16W Metal Oxide AA  
R1211 VRS-TV1JD222J J 2.2k 1/16W Metal Oxide AA  
R1212 VRS-TV1JD271J J 270 1/16W Metal Oxide AA  
R1213 VRS-TV1JD6R8J J 6.8 1/16W Metal Oxide AA  
R1214 VRS-TV1JD151J J 150 1/16W Metal Oxide AA  
R1215 VRS-TV1JD561J J 560 1/16W Metal Oxide AA  
R1216 See Controls  
R1217 VRS-TV1JD221J J 220 1/16W Metal Oxide AA  
R1218 VRD-RA2BE101J J 100 1/8W Carbon AA  
R1222 VRS-TV1JD821J J 820 1/16W Metal Oxide AA  
R1223 VRS-TV1JD562J J 5.6k 1/16W Metal Oxide AA  
R1224 VRD-RA2BE102J J 1k 1/8W Carbon AA  
R1227 VRS-TV1JD103J J 10k 1/16W Metal Oxide AA  
R1228 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
R1229 VRS-TV1JD391J J 390 1/16W Metal Oxide AA  
R1230 VRS-TV1JD682J J 6.8k 1/16W Metal Oxide AA  
R1231 VRS-TV1JD223J J 22k 1/16W Metal Oxide AA  
R1232 VRS-TV1JD223J J 22k 1/16W Metal Oxide AA

**MISCELLANEOUS PARTS**

P1200 QPLGN1285CEZZ J Plug 12-pin, (FA) AC

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>PWB-E DUNTK7126CJV1/V0</b>					<b>RESISTORS(Continued)</b>				
<b>TEXT UNIT</b>									
<b>INTEGRATED CIRCUIT</b>									
IC2400	RH-iX1567BMZZ	S	TEXT Decoder	BG	R2407	VRS-TV1JD121J	J 120	1/16W Metal Oxide (DV-5940H)	AA
<b>TRANSISTOR</b>					R2407	VRS-TV1JD151J	J 150	1/16W Metal Oxide (DV-6632H)	AA
Q2400	VS2SC2412KQ-1	J	2SC2412	AA	R2408	VRS-TV1JD104J	J 100k	1/16W Metal Oxide	AA
<b>DIODE</b>					R2409	VRS-TV1JD472J	J 4.7k	1/16W Metal Oxide	AA
D2400	RH-EX0403BMZZ	S	Zener Diode, 3V	AA	R2410	VRS-TV1JD560J	J 56	1/16W Metal Oxide	AA
<b>PACKAGED CIRCUIT</b>					R2411	VRS-TV1JD271J	J 270	1/16W Metal Oxide	AA
X2400	RCRSB0214BMZZ	S	Crystal, 20.5 MHz	AH	R2412	VRS-TV1JD101J	J 100	1/16W Metal Oxide	AA
<b>COILS</b>					R2413	VRS-TV1JD101J	J 100	1/16W Metal Oxide	AA
L2400	VP-XF3R3K0000	J	Coil, 3.3μH	AB	R2414	VRS-TV1JD101J	J 100	1/16W Metal Oxide	AA
L2401	VP-XF3R3K0000	J	Coil, 3.3μH	AB	R2415	VRS-TV1JD000J	J 0		AA
L2402	VP-XF3R3K0000	J	Coil, 3.3μH	AB	<b>MISCELLANEOUS PARTS</b>				
<b>CAPACITORS</b>					P2400	QPLGN0885CEZZ	J	Plug 8-pin, (TA)	AC
C2400	VCCCTV1HH220J	J	22p 50V Ceramic	AA	P2401	QPLGN1285CEZZ	J	Plug 12-pin, (TB)	AC
C2401	VCCCTV1HH220J	J	22p 50V Ceramic	AA	SC2400	QSOCN1068BMZZ	S	Service Connector	AE
C2402	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2403	VCEAGA1CW106M	J	10 16V Electrolytic	AA					
C2404	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2405	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2406	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2407	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2408	RC-FZ9104BMNJ	S	0.1 63V Mylar	AB					
C2409	VCEAGA1AW476M	J	47 10V Electrolytic	AA					
C2410	VCKYTV1HF103Z	J	0.01 50V Ceramic	AA					
C2411	VCKYTV1HF103Z	J	0.01 50V Ceramic	AA					
C2412	VCEAGA0JW107M	J	100 6.3V Electrolytic	AB					
<b>RESISTORS</b>									
R2400	VRS-TV1JD103J	J	10k 1/16W Metal Oxide	AA					
R2401	VRS-TV1JD471J	J	470 1/16W Metal Oxide	AA					
R2402	VRS-TV1JD101J	J	100 1/16W Metal Oxide	AA					
R2403	VRS-TV1JD101J	J	100 1/16W Metal Oxide	AA					
R2404	VRS-TV1JD101J	J	100 1/16W Metal Oxide	AA					
R2405	VRS-TV1JD121J	J	120 1/16W Metal Oxide (DV-5940H)	AA					
R2405	VRS-TV1JD151J	J	150 1/16W Metal Oxide (DV-6632H)	AA					
R2406	VRS-TV1JD121J	J	120 1/16W Metal Oxide (DV-5940H)	AA					
R2406	VRS-TV1JD151J	J	150 1/16W Metal Oxide (DV-6632H)	AA					

Ref. No. Part No. ★ Description Code

Ref. No. Part No. ★ Description Code

**PWB-F DUNTK7129CJV1**

**NICAM/IGR UNIT**

**INTEGRATED CIRCUITS**

IC2300 RH-iX1504BMZZ S BG  
IC2301 VHiL78L08AC-1 S AF

**TRANSISTOR**

O2300 VS2SC1906//1E J 2SC1906 AC

**PACKAGED CIRCUIT**

X2300 RCRSB0203BMZZ S Crystal, 17.73 MHz AG

**COIL**

L2300 VP-DF3R3K0000 J Coil, 3.3μH AB  
L2301 VP-DF3R3K0000 J Coil, 3.3μH AB  
L2302 VP-DF3R3K0000 J Coil, 3.3μH AB  
L2403 VP-DF3R3K0000 J Coil, 3.3μH AB

**CAPACITORS**

C2300 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C2301 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2302 VCKYTV1HF104Z J 0.1 50V Ceramic AA  
C2304 VCEAGA1CW107M J 100 16V Electrolytic AB  
C2305 VCEAGA1CW107M J 100 16V Electrolytic AB  
C2306 VCEAGA1CW107M J 100 16V Electrolytic AB  
C2307 VCEAGA0JW107M J 100 6.3V Electrolytic AB  
C2308 VCKYTV1HF104Z J 0.1 50V Ceramic AA  
C2309 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2310 VCEAGA0JW107M J 100 6.3V Electrolytic AB  
C2315 VCEAGA1HW105M J 1 50V Electrolytic AC  
C2316 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C2317 VCEAGA1HW105M J 1 50V Electrolytic AC  
C2318 VCKYTV1HB102K J 1000p 50V Ceramic AA  
C2319 VCKYTV1HB391K J 390p 50V Ceramic AA  
C2320 VCKYTV1HB391K J 390p 50V Ceramic AA  
C2321 VCEAGA1AW107M J 100 10V Electrolytic AB  
C2322 VCEAGA1AW107M J 100 10V Electrolytic AB  
C2323 VCEAGA1AW107M J 100 10V Electrolytic AB  
C2324 VCEAGA1CW106M J 10 16V Electrolytic AA  
C2325 VCEAGA1CW106M J 10 16V Electrolytic AA  
C2326 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2327 VCEAGA1CW107M J 100 16V Electrolytic AB  
C2328 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2329 VCEAGA1HW335M J 3.3 50V Electrolytic AB  
C2330 VCKYTV1HB471K J 470p 50V Ceramic AA  
C2331 VCKYTV1HB471K J 470p 50V Ceramic AA  
C2334 RC-FZ9334BMNJ S 0.33 63V Mylar AC  
C2335 RC-FZ9334BMNJ S 0.33 63V Mylar AC  
C2336 RC-FZ9334BMNJ S 0.33 63V Mylar AC  
C2337 RC-FZ9334BMNJ S 0.33 63V Mylar AC  
C2338 VCEAGA1CW106M J 10 16V Electrolytic AA

**CAPACITORS (Continued)**

C2339 VCKYTV1HF104Z J 0.1 50V Ceramic AA  
C2341 VCEAGA0JW107M J 100 6.3V Electrolytic AB  
C2342 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2343 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
C2344 VCCCPA1HH470J J 47p 50V Ceramic AA  
C2345 VCCCPA1HH470J J 47p 50V Ceramic AA  
C2346 VCCCTV1HH5R0C J 5p 50V Ceramic AA  
C2347 VCCCTV1HH5R0C J 5p 50V Ceramic AA  
C2348 VCEAGA1AW107M J 100 10V Electrolytic AB  
C2355 VCKYPA1HB102K J 1000p 50V Ceramic AA

**RESISTORS**

R2300 VRS-TV1JD222J J 2.2k 1/16W Metal Oxide AA  
R2301 VRS-TV1JD562J J 5.6k 1/16W Metal Oxide AA  
R2302 VRS-TV1JD271J J 270 1/16W Metal Oxide AA  
R2303 VRS-TV1JD121J J 120 1/16W Metal Oxide AA  
R2304 VRS-TV1JD470J J 47 1/16W Metal Oxide AA  
R2305 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2306 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2307 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2308 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2309 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2310 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2311 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2312 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2313 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2314 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2315 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2316 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
R2317 VRS-TV1JD101J J 100 1/16W Metal Oxide AA

**MISCELLANEOUS PARTS**

P2300 QPLGN1285CEZZ J Plug 12-pin, (AA) AC  
P2301 QPLGN1285CEZZ J Plug 12-pin, (AB) AC  
P2302 QPLGN0841CEZZ J Plug 8-pin, (SD) AC

Ref. No. Part No. ★ Description Code

**PWB-G DUNTK7128CJV1**

**21-PIN UNIT**

**INTEGRATED CIRCUIT**

IC3400 RH-IX1489BMZZ S AE

**DIODES**

D3400 RH-EX0417BMZZ S Zener Diode AA  
 D3401 RH-EX0417BMZZ S Zener Diode AA  
 D3409 RH-EX0417BMZZ S Zener Diode AA  
 D3414 RH-EX0417BMZZ S Zener Diode AA

**TRANSISTORS**

Q3400 VS2SC2412KQ-1 J 2SC2412 AA  
 Q3401 VS2SC2412KQ-1 J 2SC2412 AA  
 Q3402 VS2SC2412KQ-1 J 2SC2412 AA  
 Q3403 VS2SC2412KQ-1 J 2SC2412 AA

**CAPACITORS**

C3400 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
 C3401 VCCCTV1HH220J J 22p 50V Ceramic AA  
 C3402 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3403 VCCCTV1HH220J J 22p 50V Ceramic AA  
 C3404 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
 C3405 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3406 VCEAEA0JW227M J 220 6.3V Electrolytic AC  
 C3407 VCCCTV1HH100D J 10p 50V Ceramic AA  
 C3408 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3409 VCKYTV1HB471K J 470p 50V Ceramic AA  
 C3410 VCKYTV1HB471K J 470p 50V Ceramic AA  
 C3411 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3412 VCKYTV1HB102K J 1000p 50V Ceramic AA  
 C3413 VCKYTV1HB102K J 1000p 50V Ceramic AA  
 C3414 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3415 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3416 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3417 VCCCTV1HH220J J 22p 50V Ceramic AA  
 C3418 VCCCTV1HH220J J 22p 50V Ceramic AA  
 C3419 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
 C3420 VCKYTV1HF103Z J 0.01 50V Ceramic AA  
 C3421 VCEAEA1CW107M J 100 16V Electrolytic AC  
 C3422 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3423 VCEAEA0JW227M J 220 6.3V Electrolytic AC  
 C3424 VCCCTV1HH100D J 10p 50V Ceramic AA  
 C3425 VCEAEA1CW476M J 47 16V Electrolytic AB  
 C3426 VCKYTV1HB471K J 470p 50V Ceramic AA  
 C3427 VCKYTV1HB471K J 470p 50V Ceramic AA  
 C3428 VCKYTV1HB102K J 1000p 50V Ceramic AA  
 C3429 VCKYTV1HB102K J 1000p 50V Ceramic AA  
 C3430 VCEAEA1CW107M J 100 16V Electrolytic AC

Ref. No. Part No. ★ Description Code

**RESISTORS**

R3400 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
 R3401 VRS-TV1JD333J J 33k 1/16W Metal Oxide AA  
 R3402 VRS-TV1JD333J J 33k 1/16W Metal Oxide AA  
 R3403 VRS-TV1JD100J J 10 1/16W Metal Oxide AA  
 R3404 VRS-TV1JD750J J 75 1/16W Metal Oxide AA  
 R3405 VRS-TV1JD750J J 75 1/16W Metal Oxide AA  
 R3406 VRS-TV1JD101J J 100 1/16W Metal Oxide AA  
 R3408 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3409 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3411 VRS-TV1JD183J J 18k 1/16W Metal Oxide AA  
 R3412 VRS-TV1JD153J J 15k 1/16W Metal Oxide AA  
 R3413 VRD-RA2HD221J J 220 1/2W Carbon AA  
 R3414 VRS-TV1JD750J J 75 1/16W Metal Oxide AA  
 R3415 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
 R3416 VRS-TV1JD561J J 560 1/16W Metal Oxide AA  
 R3417 VRS-TV1JD471J J 470 1/16W Metal Oxide AA  
 R3418 VRS-TV1JD820J J 82 1/16W Metal Oxide AA  
 R3419 VRS-TV1JD471J J 470 1/16W Metal Oxide AA  
 R3420 VRS-TV1JD820J J 82 1/16W Metal Oxide AA  
 R3421 VRS-TV1JD561J J 560 1/16W Metal Oxide AA  
 R3422 VRS-TV1JD471J J 470 1/16W Metal Oxide AA  
 R3423 VRS-TV1JD820J J 82 1/16W Metal Oxide AA  
 R3424 VRS-TV1JD103J J 10k 1/16W Metal Oxide AA  
 R3425 VRS-TV1JD561J J 560 1/16W Metal Oxide AA  
 R3429 VRS-TV1JD104J J 100k 1/16W Metal Oxide AA  
 R3430 VRS-TV1JD104J J 100k 1/16W Metal Oxide AA  
 R3431 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3432 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3433 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3434 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3435 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3436 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3437 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3438 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 Δ R3439 RR-XZ0116BMZZ S 22 1/3W Fuse Resistor AB  
 R3440 VRS-TV1JD183J J 18k 1/16W Metal Oxide AA  
 R3441 VRS-TV1JD153J J 15k 1/16W Metal Oxide AA  
 R3442 VRD-RA2HD221J J 220 1/2W Carbon AA  
 R3443 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
 R3444 VRS-TV1JD333J J 33k 1/16W Metal Oxide AA  
 R3445 VRS-TV1JD333J J 33k 1/16W Metal Oxide AA  
 R3446 VRS-TV1JD100J J 10 1/16W Metal Oxide AA  
 R3447 VRS-TV1JD102J J 1k 1/16W Metal Oxide AA  
 R3448 VRS-TV1JD750J J 75 1/16W Metal Oxide AA  
 R3450 VRS-TV1JD103J J 10k 1/16W Metal Oxide AA  
 R3451 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3452 VRS-TV1JD154J J 150k 1/16W Metal Oxide AA  
 R3457 VRS-TV1JD104J J 100k 1/16W Metal Oxide AA  
 R3458 VRS-TV1JD104J J 100k 1/16W Metal Oxide AA  
 R3459 VRS-TV1JD123J J 12k 1/16W Metal Oxide AA  
 R3460 VRS-TV1JD750J J 75 1/16W Metal Oxide AA  
 Δ R3461 RR-XZ0116BMZZ S 22 1/3W Fuse Resistor AB  
 R3462 VRD-RA2BE271J J 270 1/8W Carbon AA  
 R3463 VRD-RA2BE472J J 4.7k 1/8W Carbon AA  
 R3464 VRD-RA2BE271J J 270 1/8W Carbon AA

Ref. No. Part No. ★ Description Code

**PWB-G DUNTK7128CJV1**  
**21-PIN UNIT (Continued)**

**RESISTORS (Continued)**

R3465	VRD-RA2BE472J	J	4.7k 1/8W	Carbon	AA
R3466	VRD-RA2BE271J	J	270 1/8W	Carbon	AA
R3467	VRD-RA2BE472J	J	4.7k 1/8W	Carbon	AA
R3468	VRD-RA2BE271J	J	270 1/8W	Carbon	AA
R3469	VRD-RA2BE472J	J	4.7k 1/8W	Carbon	AA

**MISCELLANEOUS PARTS**

P3400	QPLGN0741CEZZ	J	Plug 7-pin, (SA)		AC
P3401	QPLGN0641CEZZ	J	Plug 6-pin, (SB)		AB
P3402	QPLGN0841CEZZ	J	Plug 8-pin, (SD)		AB
P3403	QPLGN0341CEZZ	J	Plug 3-pin, (SC)		AA
SC3400	QSOCZ0108BMZZ	S	Socket 21-pin, RGB		AE
SC3401	QSOCZ0109BMZZ	S	Socket 21-pin, AV		AE

— End of PWB-G —

**MISCELLANEOUS PARTS**

△ ACC701	CACCB5001BMV1	S	AC Cord Ass'y		AT
SP1	VSPRA09PB018B	S	Speaker, 8Ω		BB
SP2	VSPRA09PB018B	S	Speaker, 8Ω		BB
	LHLDK1501BM00	S	AC Cord Holder		AB
	QCNW-2677BMZZ	S	Connecting Wire, (S)		AK
	QCNW-2678BMZZ	S	Connecting Wire, (E)		AF
	QCNW-2679BMZZ	S	Connecting Wire, (C)		AL
	QCNW-2680BMZZ	S	Connecting Wire, (D) (DV-6632H)		AH
	QCNW-2681BMZZ	S	Connecting Wire, (B)		AG
	QCNW-2682BMZZ	S	Connecting Wire, (K)		AG
	QCNW-2683BMZZ	S	Connecting Wire, (H)		AF
	QCNW-2684BMZZ	S	Connecting Wire, (L2)		AE
	QCNW-2686BMZZ	S	Connecting Wire, (D) (DV-5940H)		AK
	QCNW-2691BMZZ	S	Connecting Wire		AG
	QCNW-2692BMZZ	S	Connecting Wire		AL
	QCNW-2693BMZZ	S	Connecting Wire		AG
	QCNW-2694BMZZ	S	Connecting Wire		AM

— End of MISCELLANEOUS PARTS —

Ref. No. Part No. ★ Description Code

**SUPPLIED ACCESSORIES**

**ACCESSORIES**

RRMCG1036BMSA	S	Remote Control Unit	BB
TiNS-6231BMZZ	S	Operation Manual (DV-5940H)	AK
TiNS-6226BMZZ	S	Operation Manual (DV-6632H)	AN

**ACCESSORIES (NOT REPLACEMENT ITEM)**

TGAN-1510BMN0	-	Guarantee Card	—
UBATU0015CEZZ	-	Dry Batteries	—
TiNS-6258BMN0	-	Quick Guide (DV-5940H)	—
TiNS-6243BMN0	-	Quick Guide (DV-6632H)	—

— End of SUPPLIED ACCESSORIES —


**PACKING PARTS**

**(NOT REPLACEMENT ITEM)**


SPAKC5198BMZZ	-	Packing Case (DV-5940H)	—
SPAKC5196BMZZ	-	Packing Case (DV-6632H)	—
SPAKP2006BMZZ	-	Polystyrene Mat	—
SPAKX4017BMN1	-	Buffer Material (DV-5940H)	—
SPAKX4018BMZZ	-	Buffer Material (DV-6632H)	—

— End of PACKING PARTS —

## CABINET PARTS

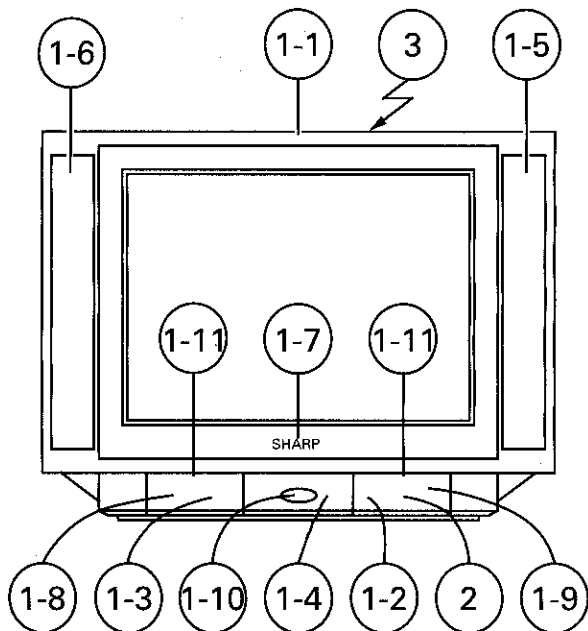

DV-5940H

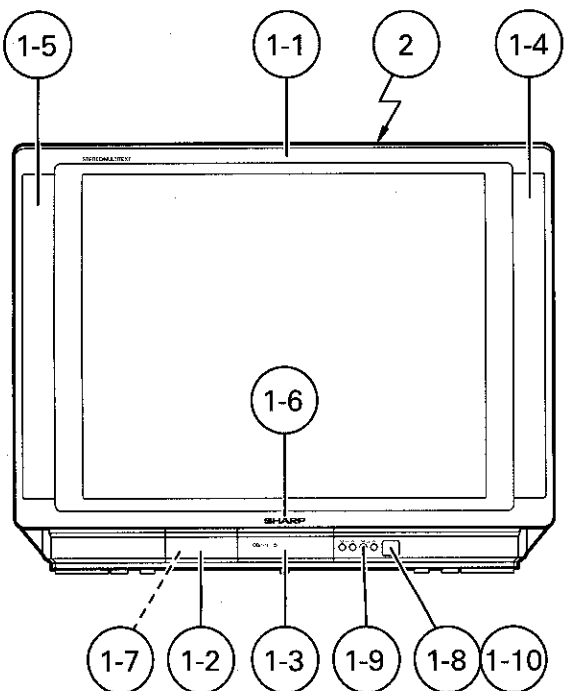

DV-6632H

### MODEL DV-5940H

1	CCABA1071BMV0	S Cabinet Ass'y, Front	BU
1-1 <sub>2</sub>	<i>Not Available</i>	- Cabinet, Front	—
1-2	GDORF1041BMSA	S Door, Right	AE
1-3	GDORF1042BMSA	S Door, Left	AE
1-4	GMADT1047BMSA	S Window	AK
1-5	GNETV0007BMSB	S Speaker Net, Right	AW
1-6	GNETV0008BMSB	S Speaker Net, Left	AW
1-7	HBDGB3101CESB	S Badge, "SHARP"	AG
1-8	HiNDP5059BMSA	S Indicator, Left	AE
1-9	HiNDP5060BMSA	S Indicator, Right	AE
1-10	JBTN-1011BMSA	S Push Button, OPC	AC
1-11	PKAi-1083BM00	S Door Latch	AF
2	JBTN-1013BMSA	S Push Button, Power	AB
3	CCABB1031BMV0	S Cabinet Ass'y, Rear	BF

### MODEL DV-6632H

1	CCABA1069BMV0	S Cabinet Ass'y, Front	BT
1-1	<i>Not Available</i>	- Cabinet, Front	—
1-2	GDORF1043BMSA	S Door, Right	AE
1-3	GMADT1050BMSA	S Window	AG
1-4	GNETV0009BMSA	S Speaker Net, Right	AV
1-5	GNETV0010BMSA	S Speaker Net, Left	AV
1-6	HBDGB3506BMSA	S Badge, "SHARP"	AF
1-7	HiNDP5065BMSA	S Indication Plate	AE
1-8	JBTN-1016BMSA	S Button, Power	AB
1-9	JBTN-1017BMSA	S Button, Channel/Volume	AC
1-10	MSPRC0099BMFW	S Spring, Power Button	AA
2	CCABB1036BMV0	S Cabinet Ass'y, Rear	BF

— End of CABINET PARTS —

# SHARP