



XLi Option Cards

For Customizing the Time and Frequency System

XLi OPTION CARDS

- Network Time Server on Standard Network Port
- Telecommunications Interface (T1/E1)
- Frequency Measurement
- Time Interval/Event Timing
- Programmable Pulse Output
- 1, 5, 10 MHz/MPPS Frequency Outputs
- Low Phase Noise Frequency Outputs
- Multicode Output for IRIG A, B, E, G, H, XR3/2137 and NASA 36
- N8 Frequency Synthesizer
- DC Power Supplies
- Oscillator Upgrades
- Frequency and Time Deviation Monitor (FTM)
- N.1 Frequency Synthesizer
- Have Quick/1PPS Time and Frequency Reference

Symmetricom makes it easy to configure the XLi to meet your specific application needs with a variety of XLi Option Cards. Whether your application demands redundancy in power supplies, GPS, or any other function, all it takes is the proper configuration of cards.

Not sure how to achieve what you want? Simply call Symmetricom's time and frequency experts. You can also configure your own XLi system online at www.symmetricom.com.

Our wide range of option cards also makes it easy to adapt your XLi configuration if your application needs change. Plug-and-play cards and built-in XLi option card recognition software lets you swap out modules without modifying your operation system.

For more than 30 years Symmetricom has defined premium time and synchronization solutions. Put our expertise to work for you.



XLi Time and Frequency System

Network Time Server on Standard Network Port For XLi



- Synchronize servers and workstations across the network
- High-bandwidth NTP capability
- High availability time referenced to XLi
- MD5 security protocol
- NTP broadcast mode
- SNMP Enterprise MIB
- Stratum 1 operation via GPS satellites

The high performance Symmetricom Network Time Server (NTS) represents a breakthrough in network synchronization technology. By combining a high-speed/high-capacity network interface and a wide range of network protocol support, XLi seamlessly integrates into existing networks.

The NTS distributes time to precisely synchronize client computer clocks over a network. Time is acquired from the host XLi and distributed over the network using the Network Time Protocol (NTP). Client computer clocks can be synchronized within milliseconds. Information on the health and status of the NTP server and the primary time synchronization source is available by using the SNMP protocol Enterprise MIB. Also, MD5 security protocol is included to authenticate NTP client-server communication. The standard network port, when factory enabled, serves as the NTP server via an RJ-45 Ethernet connector.

No additional hardware is needed for this option; it utilizes the XLi standard network port, leaving all option slots available.

Specifications

NETWORK PROTOCOLS

- Network time protocols
 - NTP v3/v4 (RFC 1305)
 - SNTP (RFC 1769)
 - TIME (RFC 868)
 - MD5 (RFC 1321)
- Other protocols
 - Telnet (RFC 854)
 - FTP (RFC 959)
 - MIB II (RFC 1213)
 - SNMP v2 Enterprise MIB II (RFC 1157)
- Network transport protocol: TCP/IP
- Simple Network Management Protocol (SNMP)
 - SNMP provides the network administrator with network status and statistics. This feature implements SNMP versions 1 & 2 and Management Information Base (MIB) I and II.
- Network interface: TCP/IP Ethernet or IEEE 802.3
- Network time accuracy: 1 to 10 mS typical
- Accuracy: Function of input synchronization source (IRIG or GPS)

CLIENT SOFTWARE

An NTP client/daemon is required for client-side synchronization with any network time server. Included with the NTP option is Symmetricom's WinSync NTP client for Windows® 95/98/NT/2000. Comprehensive time client, server & management software for easy distribution, management and monitoring of time across the network is also available.

Visit <http://www.symmetricom.com> for an extensive list of software time clients for various operating systems.

OPTIONS

- Comprehensive time client, server & management software for easy distribution, management and monitoring of time across the network.

Telecommunications Interface For XLI



- Provides T1, E1, and status alarm outputs for network synchronization
- Composite clock, logic level, RS-422, and sine wave

T1 OUTPUT

The T1 output provides telecommunications timing signals meeting the requirements of ITU-T G.703 and ITU-T G.704 for both the 12-frame multiframe (D4 or SuperFrame) and 24-frame multiframe (ESF or Extended SuperFrame) formats. In addition, when the clock is configured with an appropriate high stability oscillator option, the requirements of ANSI T1.101-1994 and ITU-T G.811 pertaining to primary reference source operation are met.

This option can be added to the XLI in a “Plug-and-Play” manner without hardware or software modification.

E1 OUTPUT

The E1 option card provides the user with telecommunications timing signals meeting the requirements of ITU-T G.703 and ITU-T G.704 for the 16-frame multi-frame. In addition, requirements of ANSI T1.101-1994 and ITU-T G.811 pertaining to primary reference source operation are met.

T1 Option Specifications

- Framed all 1s DS1/T1 1544 Kb/s outputs (Two outputs: A and B)
 - Formats: SuperFrame (D4)
 - Line code: B8ZS/AMI (these are the same for all 1s)
 - Interface: Balanced, $Z_0 = 100\Omega$, on wire wrap pins
 - Wave shaping: T1 short loop (DSX-1; 0 – 655')
- Major and minor alarm relay closures
 - Format: Form-C normally open and normally closed contacts
 - Interface: Wire wrap pins
 - Contacts: Rated to 115 VAC/150 VDC at 2 A
- 64 Kb/s composite clock output (Aux Out 1)
 - Format: As per ITU-T G.703
 - Centralized Clock Interface, paragraph 1.2.2. AMI with 5/8 duty cycle. All 1s with bipolar violations at an 8 Kb/s rate.
 - Interface: Balanced, 2 V peak into 135Ω , on wire wrap pins
- Outputs (Aux Out 2, 3, 4)
 - Frequency: 1544 Kb/s
 - Interface: Balanced, RS-422 levels into 100Ω , on wire wrap pins
- Synchronization
 - Phase locked to the clock 10 MHz
 - Accuracy: Function of input synchronization source (IRIG or GPS)

E1 Option Specifications

- Framed all 1s CEPT E1 2048 Kb/s outputs (Two outputs: A and B)
 - Format: 16 frame multiframe
 - Line code: HDB3/AMI (these are the same for all 1s)
 - Interface: Balanced, $Z_0 = 120\Omega$, on wire wrap pins
 - Wave shaping: CEPT G.703 pulse template requirements
- Major and minor alarm relay closures
 - Format: Form-C Normally Open and Normally Closed contacts
 - Interface: Wire wrap pins
 - Contacts: Rated to 115 Vac/150 Vdc at 2 A
- 64 Kb/s composite clock output (Aux Out 1)
 - Format: As per ITU-T G.703
 - Centralized Clock Interface, paragraph 1.2.2. AMI with 5/8 duty cycle. All 1s with bipolar violations at an 8 Kb/s rate.
 - Interface: Balanced, 2 V peak into 135Ω , on wire wrap pins
- 2048 Kb/s sine outputs (Aux Out 2, 3, 4)
 - Frequency: 2048 Kb/s
 - Interface: Balanced RS-422 levels on wire wrap pins
- Synchronization
 - Phase locked to the clock 10 MHz
 - Accuracy: Function of input synchronization source (IRIG or GPS)

Frequency Measurement For XLi

The Frequency Measurement is a software option that provides the ability to precisely measure the frequency of an externally applied 1, 5, or 10 MHz signal. Measurement resolution is better than 120×10^{-12} with only a 1-second averaging time. It supports a periodic, zero dead-time mode of operation as well as a single-shot, measurement-on-demand mode. The measurement interval can be specified in integer seconds over the range of 1 to 100,000 seconds. Frequency measurement results appear on the front panel display and are output via the communication port.

Frequency Measurement Specifications

INPUT FREQUENCIES

- Keypad selectable frequencies of 1, 5, 10 MHz.
 - Input Level: 1.0 to 10 Vpp
 - Input Impedance: 1k Ω , jumper selectable to 50 Ω
 - Measurement Range: $\pm 1 \times 10^{-9}$ maximum offset; compares the external frequency under test directly to the clock's disciplined oscillator
 - Input Frequency: 1 MHz, 5 MHz, 10 MHz
 - Resolution:
 - 120x10⁻¹² @ 1 second
 - 12x10⁻¹² @ 10 seconds
 - 1x10⁻¹² @ 100 seconds
- Accuracy: These specifications are subject to change depending on the specific oscillator installed in the XLi.*
 - TCXO
 - 1x10⁻⁹ @ 1 second
 - 2x10⁻¹⁰ @ 100 seconds
 - 1x10⁻¹² @ 1 day
 - Ovenized quartz
 - 1x10⁻¹⁰ @ 1 second
 - 1x10⁻¹⁰ @ 100 second
 - 1x10⁻¹² @ 1 day
 - High-stability quartz
 - 3x10⁻¹¹ @ 1 second
 - 3x10⁻¹¹ @ 100 seconds
 - 1x10⁻¹² @ 1 day
 - Rubidium
 - 3x10⁻¹¹ @ 1 second
 - 4x10⁻¹² @ 100 seconds
 - 1x10⁻¹² @ 1 day
 - High-stability Rubidium
 - 3x10⁻¹¹ @ 1 second
 - 4x10⁻¹² @ 100 seconds
 - 1x10⁻¹² @ 1 day

* For oscillator information, refer to Symmetricom's oscillator datasheet.

Time Interval/Event Timing For XLi

TIME INTERVAL

The Time Interval function is a software option that provides the user with the ability to precisely measure the interval between the time of occurrence of the clock-derived 1 Hz reference pulse and the rising edge of the user-supplied 1 Hz pulse.

EVENT TIMING

The Event Timing feature offers the capability of locating the time of occurrence of the rising edge of the applied pulse with respect to the time of year. A "burst" mode provides increased performance during short intervals. The collected data is available via the RS-232 or the Telnet port.

Specifications

INPUT FREQUENCIES

- Rate: 1 PPS
- High level: Logic Hi >1.25V <10V
- Low level: Logic Low <1.25V >0V
- Active edge: Rising (Positive)
- Pulse width: 100 nS minimum
- Input impedance: >1k, jumper selectable to 50

TIME INTERVAL FEATURE

- Measurement
 - Rate: 1 per second
 - Resolution: 5 nS
 - Accuracy: ± 5 nS (+ clock accuracy**)
 - Range: 0.0 to 1 year

* Display: Time into the second, updated once per second, is displayed to the nanosecond until another event occurs or until the "TIME", "STATUS", or "POSITION" push-button is pressed.

EVENT TIMING FEATURE

- Measurement
 - Rate: 10/second or 100/second burst
 - Resolution: 5 nS
 - Accuracy: ± 5 nS (+ clock accuracy**)
 - Range: 0.0 to 1 year

* Display: Event Time occurrence, hundreds of days through nanoseconds, is displayed until another event occurs or until the "TIME", "STATUS", or "POSITION" push-button is pressed.

** For clock accuracy see accuracy of host unit.


Programmable Pulse Output For XLi

The Programmable Pulse Output option is a software option that provides a user configurable TTL level pulse output that can be used to supply a precisely synchronized “trigger” pulse at specific times or provide periodic pulse outputs. The rising edge of the trigger output may be programmed with microsecond resolution for fine control. The periodic pulse rates supports several popular frequencies such as 1 PPS, 1 PP 10 SEC, 1 PPM, 1 PP 10 MIN, 1 PPH, 1 PP 10 HR, 1 PPD, 1 PP 10 DAYS or 1 PP 100 DAYS are available. The pulse width is also programmable. The pulse is supplied via a rear panel BNC.

Specifications

- Range: 500kHz to 1 PP Year (integer multiples of 1 uS)
- Pulse width: Programmable in 1 μ S steps up to 1 year
- On time edge: Rising
- Amplitude: TTL Levels into 50 Ω
- Accuracy: 100nSec

1, 5, 10 MHz/MPPS For XLi

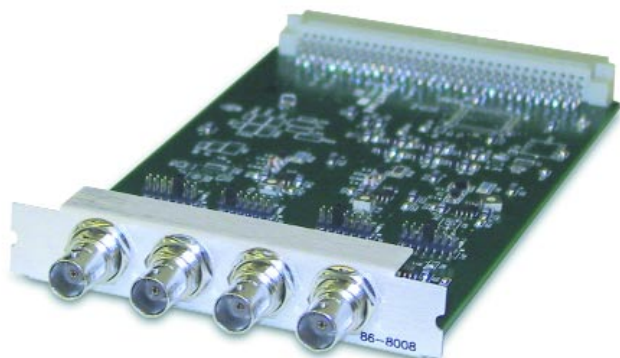

The 1, 5, 10 MHz/MPPS Output card provides four precise sine wave or square wave through four BNC outputs. These outputs are phased-locked to the host receiver's disciplined reference oscillator. They are automatically enabled upon power-up, and are independently selectable by the user with no configuration setup required.

This option can be added to the XLi in a "Plug-and-Play" manner without hardware or software modification.

Outputs are preconfigured at the factory. Please specify desired outputs on the sales order.

1, 5, 10 MHz/MPPS Output Card Specifications

1 MHz OUTPUT

- Amplitude: 1 Vrms into 50 Ω
- Harmonic distortion: -30 dBc
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Connector: Female, BNC

5 MHz OUTPUT

- Amplitude: 1 Vrms into 50 Ω
- Harmonic distortion: -30 dBc
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Connector: Female, BNC

10 MHz OUTPUT

- Amplitude: 1 Vrms into 50 Ω
- Harmonic distortion: -30 dBc
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Connector: Female, BNC

1 MPPS OUTPUT

- Amplitude: TTL into 50 Ω
- Duty cycle: 50%
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)


5 MPPS OUTPUT

- Amplitude: TTL into 50 Ω
- Duty cycle: 50%
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)

10 MPPS OUTPUT

- Amplitude: TTL into 50 Ω
- Duty cycle: 60/40%
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)

Low Phase Noise Output For XLI

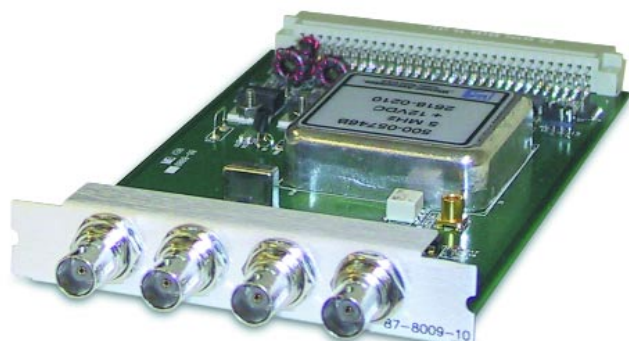

This card provides four isolated, 50 ohm frequency output signals with exceptional spectral purity. Isolation from the receiver's internal digital signal noise and power supply noise enables the same high-performance phase noise and spurious noise characteristics as the low noise oscillator source. The low phase noise option requires an oscillator upgrade to the XLI system, such as OCXO, High Stability OCXO, or Rubidium.

This option can be added to the XLI in a "Plug-and-Play" manner without hardware or software modification.

Low Phase Noise Output Card Specifications

LOW PHASE NOISE 10 MHz OUTPUTS

- Provides four 10 MHz frequency output signals
- Signal type: Analog sine wave
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Amplitude: +13dBm (± 1 dBm)
- Output impedance: 50 Ω
- Quantity: 4
- Connector: BNC female
- Harmonic distortion: -30dBc
- Spurious: -90dBc
- Isolation: -70dBc
- Phase noise
 - 85dBc/Hz @ 1 Hz offset
 - 115dBc/Hz @ 10 Hz offset
 - 140dBc/Hz @ 100 Hz offset
 - 145dBc/Hz @ 1 kHz offset
 - 150dBc/Hz @ 10 kHz offset

LOW PHASE NOISE 5 MHz OUTPUTS

- Provides four 5-MHz frequency output signals
- Signal type: Analog sine wave
- Synchronization: Phase locked to the clock 10 MHz
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Amplitude: +13dBm (± 1 dBm)
- Output impedance: 50 Ω
- Quantity: 4
- Connector: BNC female
- Harmonic distortion: -30dBc
- Spurious: -90dBc
- Isolation: -70dBc
- Phase noise
 - 85dBc/Hz @ 1 Hz offset
 - 115dBc/Hz @ 10 Hz offset
 - 140dBc/Hz @ 100 Hz offset
 - 145dBc/Hz @ 1 kHz offset
 - 150dBc/Hz @ 10 kHz offset

Multicode Output For XLi



- Programmable formats
- Up to four code outputs
- Codes available: IRIG A, B, E, G, H, XR3/2137 and NASA 36

Select the various time code formats by using any of the three interfaces available: the front panel keypad and display, the RS-232/422 serial port, or the standard network port that is accessible from anywhere in the world. The available time code format menu contains IRIG A, B, E, G, H, XR3/2137, and NASA 36.

This option can be added to the XLi in a “Plug-and-Play” manner without hardware or software modification.

Multicode Output Specifications

- Amplitude modulated carrier and DC shift outputs are paired
 - Amplitude into 50Ω: 0–3 Vpp, adjustable via internally accessible potentiometer
 - Amplitude into 600Ω: 0–10 Vpp, adjustable via internally accessible potentiometer
 - Modulation ratio: 2:1 to 5:1 adjustable via internally accessible potentiometer
- Connector: BNC
- Quantity: 4
- Output impedance: 25Ω
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Time codes

IRIG A 130	IRIG A 133	IRIG B 120	IRIG B 123
IRIG E 111	IRIG E 112	IRIG E 121	IRIG E 122
IRIG G 141	IRIG G 142	IRIG H 111	IRIG H 112
IRIG H 121	IRIG H 122	2137	XR-3
NASA-36 [All codes in 24 hour format]			
- Time references: Standard, UTC, GPS, or Local

N8 Frequency Synthesizer For XLi



The N8 Frequency Synthesizer provides pulse rates from 8 KPPS through 8192 KPPS in 8 KPPS steps, with the output frequency locked to the system oscillator. The output configuration is via the keypad/display, RS232/422, and the standard network port. This option card offers four independently programmable frequency synthesizers that provide pulse rates from 8 KPPS through 8192 KPPS in 8 KPPS steps.

This option can be added to the XLi in a “Plug-and-Play” manner without hardware or software modification.

N8 Frequency Outputs Specifications

- Channels: 4, independently programmable
- Output pulse rates: 8 KPPS through 8192 KPPS in 8 KPPS steps
- Accuracy: Function of input synchronization source (IRIG or GPS)
- Output drive: RS-422 levels into 50Ω
- Wave form: Square wave
- Synchronization: Phase locked to the clock 10 MHz
- Jitter cycle-to-cycle: <10 nS
- Connector: Triax female (Trompeter BJ-77)

DC Power Supplies For XLI



The modular DC power supplies plug in the back of the XLI and can be used in place of the standard AC power supply, or in addition to it as a redundant power source. The DC power supplies will take two optional slots for the 1U chassis leaving only two for other options; however, in the 2U chassis, there is a dedicated bay only for the secondary power supply (DC included) leaving all 10 option slots available.

This option can be added to the XLI in a “Plug-and-Play” manner without hardware or software modification.

DC Power Supplies Specifications

12 Vdc POWER INPUT

- Input connector: Three-position screw terminal block
- Input voltage range: 12–18 VDC for nominal 12 volt input
- Input current, maximum: 7.5 amps @ 12 volts input
- Isolation (ground): Input is fully floating. Either input polarity can be strapped to chassis ground at the input terminal block.
- Isolation input to output: 500 VAC, 710 VAC minimum
- Output specifications:
 - +5 V $\pm 2\%$, 20 watts, 4 amps
 - +12 V $\pm 2\%$, 24 watts, 2 amps
 - 12 V $\pm 2\%$, 24 watts, 2 amps
- Power supply status: The fault detector monitors all three output voltages and provides a visual (panel LED) and fault output if any output voltage decreases by 10%.
- Panel status LED: Green LED on with no fault and DC power applied. Green LED off with fault or no DC power applied.
- Output status line: Open collector. High impedance state with no fault. Low impedance state with power supply fault.
- Fan CFM: Exhaust 3–6 CFM

24 Vdc POWER INPUT

- Input connector: Three position screw terminal block
- Input voltage range: 18–36 Vdc for nominal 24 volt input
- Input current, maximum: 6 amps @ 18 volts input
- Isolation (ground): Input is fully floating. Either input polarity may be strapped to chassis ground at the input terminal block.
- Isolation input to output: 500 VAC, 710 VAC minimum
- Output specifications
 - +5 V $\pm 2\%$, 25 watts, 5 amps
 - +12 V $\pm 2\%$, 30 watts, 2.5 amps
 - 12 V $\pm 2\%$, 30 watts, 2.5 amps
- Power supply status: The fault detector monitors all three output voltages and provides a visual (panel LED) and fault output if any output voltage decreases by 10%.
- Panel status LED: Green LED on with no fault and DC power applied. Green LED off with fault or no DC power applied.
- Output status line: Open collector. High impedance state with no fault. Low impedance state with power supply fault.
- Fan CFM: Exhaust 3–6 CFM


48 Vdc POWER INPUT

- Input connector: Three position screw terminal block
- Input voltage range: 36–72 VDC for nominal 48 volt input
- Input current, maximum: 3 amps @ 36 volts input
- Isolation (ground): Input is fully floating. Either input polarity may be strapped to chassis ground at the input terminal block.
- Isolation input to output: 500 VAC, 710 VAC
- Output specifications:
 - +5 V $\pm 2\%$, 25 watts, 5 amps
 - +12 V $\pm 2\%$, 30 watts, 2.5 amps
 - 12 V $\pm 2\%$, 30 watts, 2.5 amps
- Power supply status: The fault detector monitors all three output voltages and provides a visual (panel LED) and fault output if any output voltage decreases by 10%.
- Panel status LED: Green LED on with no fault and DC power applied. Green LED off with fault or no DC power applied.
- Output status line: Open collector. High impedance state with no fault. Low impedance state with power supply fault.
- Fan CFM: Exhaust 3–6 CFM

Oscillators For XLI

Symmetricon's GPS receiver takes full advantage of the excellent long-term stability of the GPS system to steer or "discipline" the receiver's local oscillator. This process dramatically enhances performance by removing the long-term aging and drift of the oscillator without operator intervention.

Symmetricon provides a full spectrum of ultra-precise frequency reference standards for every application. Upgrades to the standard Voltage Controlled Temperature Compensated Crystal Oscillator (VCTCXO) are the disciplined Ovenized Crystal Oscillator (OCXO), the disciplined High Stability Ovenized Crystal Oscillator (OCXO), the disciplined Rubidium Oscillator, and the disciplined High Stability Rubidium Oscillator.

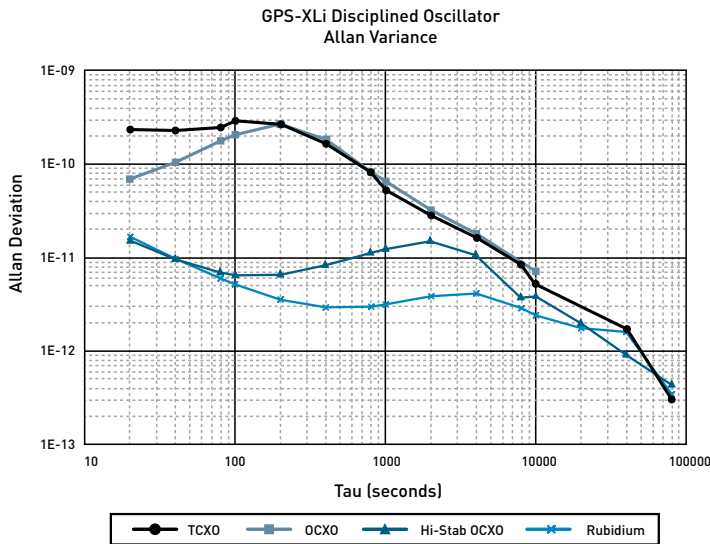

Oscillators Specifications

STANDARD TCVCXO

- Accuracy: Function of input synchronization source (IRIG or GPS)
- Frequency/timing Allan Deviation
- Stability
 - 1 x 10⁻⁹ @ 1 sec
 - 2 x 10⁻¹⁰ @ 1000 sec
 - 1 x 10⁻¹² @ 24 hours
- Temperature: 5 x 10⁻⁷, over 0°C to 50°C when not locked to a reference

OCXO OSCILLATOR OPTION

- Accuracy: Function of input synchronization source (IRIG or GPS)
- Frequency/timing Allan Deviation
 - Stability:
 - 1 x 10⁻¹⁰ @ 1 sec
 - 1 x 10⁻¹⁰ @ 1000 sec
 - 1 x 10⁻¹² @ 24 hours
- Temperature: 1 x 10⁻⁸, over 0°C to 50°C when not locked to a reference
- Drift rate: 5 x 10⁻⁹ per 24 hours

HIGH STABILITY OCXO OSCILLATOR OPTION

- Accuracy: Function of input synchronization source
- Frequency/timing Allan Deviation
 - Stability:
 - 3 x 10⁻¹¹ @ 1 sec
 - 3 x 10⁻¹¹ @ 1000 sec
 - 1 x 10⁻¹² @ 24 hours
- Temperature: 1 x 10⁻⁹, over 0°C to 50°C when not locked to a reference
- Drift rate: 1 x 10⁻¹⁰ per 24 hours

RUBIDIUM OSCILLATOR OPTION

- Accuracy: Function of input synchronization source (IRIG or GPS)
- Frequency/timing Allan Deviation
 - Stability:
 - 3 x 10⁻¹¹ @ 1 sec
 - 4 x 10⁻¹² @ 1000 sec
 - 1 x 10⁻¹² @ 24 hours
- Temperature: 3 x 10⁻¹⁰, over 0°C to 50°C when not locked to a reference
- Drift rate: 5 x 10⁻¹¹ per month (720 hours)

HIGH PERFORMANCE RUBIDIUM OSCILLATOR OPTION

- Accuracy: Function of input synchronization source (IRIG or GPS)
- Frequency/timing Allan Deviation
 - Stability:
 - 3 x 10⁻¹¹ @ 1 sec
 - 4 x 10⁻¹² @ 1000 sec
 - 1 x 10⁻¹² @ 24 hours
- Temperature: 3 x 10⁻¹⁰, over 0°C to 50°C when not locked to a reference
- Drift rate: 1 x 10⁻¹¹ per month (720 hours)

NEW Frequency and Time Deviation Monitor (FTM) For XLI



This plug-in card meets the specific needs of the electrical power industry. It provides a digital display and computer-compatible outputs of the following parameters:

- Frequency Deviation – The instantaneous difference between the locally generated frequency (typically 50 or 60 Hz) and the precision frequency of the host Synchronized Clock.
- System Frequency – The user's locally generated frequency.
- Time Deviation – The accumulated difference in time between a clock locked to the locally generated frequency and the precise time of the Synchronized Clock.
- System Time – (Hours, minutes and seconds) as defined by a clock running off the user's locally generated frequency.
- Local Time – Local corrected UTC time seconds through days.

Both the display port and the communication port have user-selectable baud rates, parity and the number of data bits and stop bits.

The monitored frequency and time deviation values are available via the front panel display(s), the communication port, and the remote display driver RS-422 port.

Displays for XLI-FTM

MODEL	SIZE	DISPLAY DATA*
820-247	RD-2	Local Time HH:MM:SS
820-240	RD-4	System Frequency
820-258	RD-4	Delta Frequency
820-259	RD-4	Delta Time
820-260	RD-4	System Time
820-261	RD-4	Local Time
820-251	RD-1	Delta Time
820-251-1	RD-1	Delta Frequency
820-251-2	RD-1	System Frequency

Specifications

GENERAL SPECIFICATIONS

- Measurement input: 95–260 VAC, 40–70 Hz; user-selectable 50 or 60 Hz operation.
- Signal conditioning: RFI input filter; multistage low-pass filter. Line fused; varistor protected 2500 VAC rms isolation. Transformer coupled.
- Remote display port: RS-422. Each output term has individual address codes.

FREQUENCY DEVIATION

- Current deviation of the measurement input frequency from the nominal frequency (50 or 60 Hz). Measurement Sample Rate: 1 sample per second
 - Range: ± 9.999 Hz
 - Measurement resolution: 30 μ Hz
 - Output data resolution: Resolution to 1 mHz

TIME DEVIATION

- Accumulated time drift due to user's local frequency difference as compared to the host clock. The user can enter an initial time offset.
 - Measurement sample rate: 1 sample per second
 - Range: ± 99.999 seconds
 - Measurement resolution: 500 nS
 - Output data resolution: 1 mS
 - Time offset input: ± 99.999 seconds maximum. Entry via keypad or communication port.

SYSTEM FREQUENCY

- Current measurement of input reference frequency.
 - Range: 40 - 70 Hz
 - Measurement Resolution: 30 μ Hz
 - Output Data Resolution: 1 mHz

SYSTEM TIME

- Arithmetic value calculated from local time, plus user-entered offset, plus time deviation.

* Input to displays are from FTM III serial display port. FTM displays are not driven from time codes such as IRIG B, etc.

NEW

N.1 Frequency Synthesizer For XLi



The N.1 Frequency Synthesizer provides pulse rates from 1 PPS through 50 MPPS in 1 PPS steps, with the output locked to the system oscillator. This option card offers four independently programmable frequency synthesizers.

Specifications

- Channels: 4, independently programmable
- Input reference frequency: System 10 MPPS
- Output pulse rates: 1 PPS through 50 MPPS in 1 PPS steps
- Output drive: RS-422
- Wave form: Square wave
- Jitter cycle-to-cycle: <1nS
- Output connector: Triax

NEW

Have Quick/1PPS Time and Frequency Reference Input For XLi

The Have Quick and / or 1 PPS Time and Frequency reference is configurable to synchronize the XLi as a primary or secondary reference source. It can be configured to synchronize the major and minor time to the Have Quick incoming code, minor time to the 1 PPS input, or major time to the Have Quick incoming code with minor time synchronized by the 1 PPS.

1 PPS Input Specifications

- Frequency: 1 Hz
- Accuracy: 1 μ Sec
- Stability:
 - 1 x 10⁻⁹ @ 1 sec
 - 2 x 10⁻¹⁰ @ 1000 sec
 - 3 x 10⁻¹² @ 1 day
- High Level: >1.25V <10V
- Low Level: <1.25V >0V
- Synchronization edge: Positive
- Impedance: 1K Ω to ground
- Connector: BNC female

Have Quick Input Specifications

- Format: Have Quick II (ICD-GPS-060)
- Bit period: 600 μ s \pm 10 μ s
- Bit rate: Approximately 1667 BPS
- Frame rate: 1 frame/second
- Accuracy: 1 μ Sec
- Stability:
 - 1 x 10⁻⁹ @ 1 sec
 - 2 x 10⁻¹⁰ @ 1000 sec
 - 3 x 10⁻¹² @ 1 day
- High Level: >4.5 and Max 5.5V
- Low Level: < +0.5V and Min 0V
- Impedance: 1K Ω to ground
- Connector: BNC female



SYMMETRICOM, INC.
 2300 Orchard Parkway
 San Jose, California
 95131-1017
 tel: 408.433.0910
 fax: 408.428.7896
 info@symmetricom.com
 www.symmetricom.com