

# TEAC

## SERVICE MANUAL

---

# CT-M147 MKII

14" CTV

---

Effective: March, 1996.

CTM147MK2SER



## SPECIFICATION

SYSTEM	:	PAL-B/G	
CHANNEL COVERAGE	VHF LOW	:	2 - 4 CH
	VHF HIGH	:	5 - 12 CH
	UHF	:	21 - 69 CH
FREQUENCY RANGE	VHF LOW	:	47 - 68 MHz
	VHF HIGH	:	174 - 230 MHz
	UHF	:	470 - 862 MHz
SCANNING	LINES	:	625 LINES
	HORIZONTAL	:	15625 Hz
	VERTICAL	:	50 Hz
IF FREQUENCY	VIDEO	:	38.9 MHz
	SOUND	:	33.4 MHz
	CHROMA	:	34.47 MHz
VISION/SOUND SEPARATION	:	5.5	MHz
SENSITIVITY	VHF LOW	:	45 uV
	VHF HIGH	:	46 uV
	UHF	:	48 uV
OUTPUT POWER MAXIMUM	:	1200	mW
	10% THD	:	1000 mW
CRT	:	14" (35.5cm) DIAGONAL, 22.5mm NECK DIAMETE 90° DEFLECTION ANGLE	
SPEAKER	:	3" 16 OHM 2W X 1	
ANTENNA IMPEDANCE	:	75	OHM
POWER CONSUMPTION	:	60	Watts

## A. VIF ALIGNMENT


A. Preparation step. (see fig.1)

1. Connect Sweep Generator to tuner test point and Ground.
2. Connect 13V B+ Bias Voltage to C406 (+) and Ground.
3. Connect A.G.C. Bias Voltage to PIN 48 of U201.  
\* A.G.C. Bias Voltage can't over 5V.
4. Disconnect the soldering pads 'H' and 'I'.
5. Connect 13V B+ bias voltage to C514 (+).

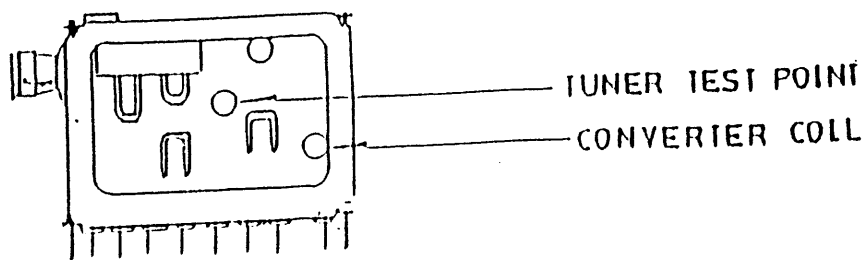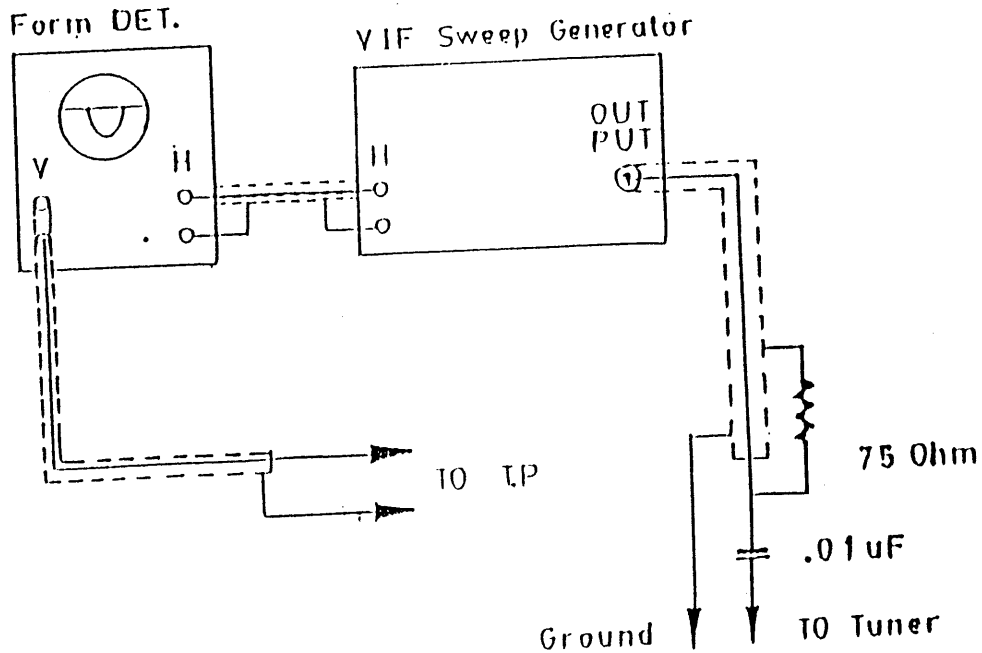


B. TANK COIL ALIGNMENT

1. Calibrate the division of Sweep Generator equal to 20mV per div.
2. Adjust the output of Sweep Generator to 60dB.
3. Connect the waveform detector to TP201 and Ground.
4. Adjust AGC bias voltage to achieve 2V p-p output on oscilloscope.
5. Adjust L204 to obtain P.C. (38.9 Mhz) at the lowest point.  
(Fig. 2)

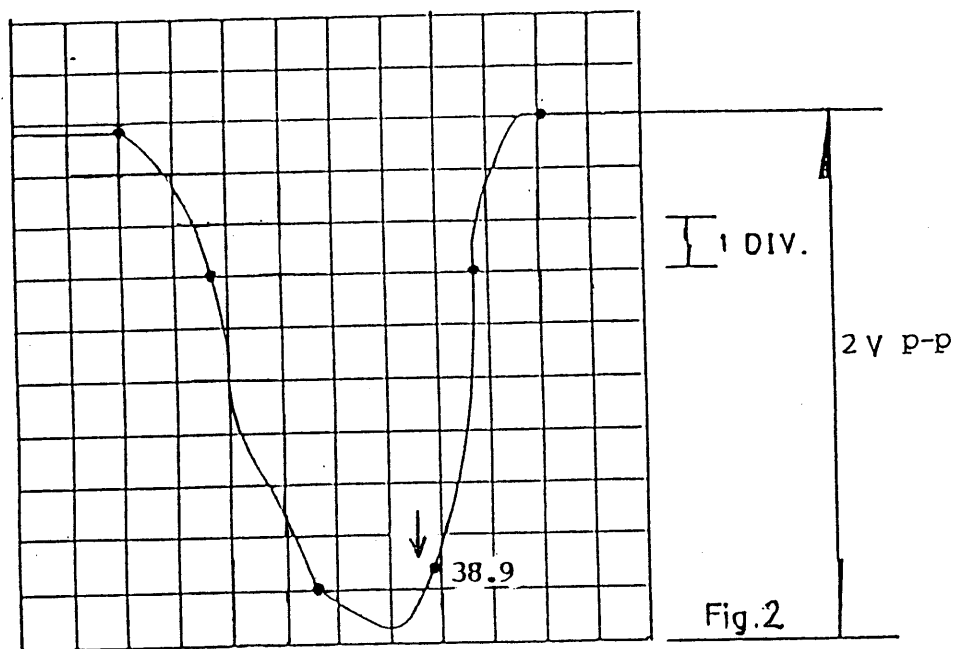

C. V.I.F. ALIGNMENT

1. Connect 100 OHM resistor parallel to R266.
2. The output of Sweep Generator should be -60dB.
3. Adjust A.G.C. Bias to maintain the waveform achieve 2V p-p.  
(about 4V)
4. Adjust tuner convertor coil to obtain waveform as Fig. 3

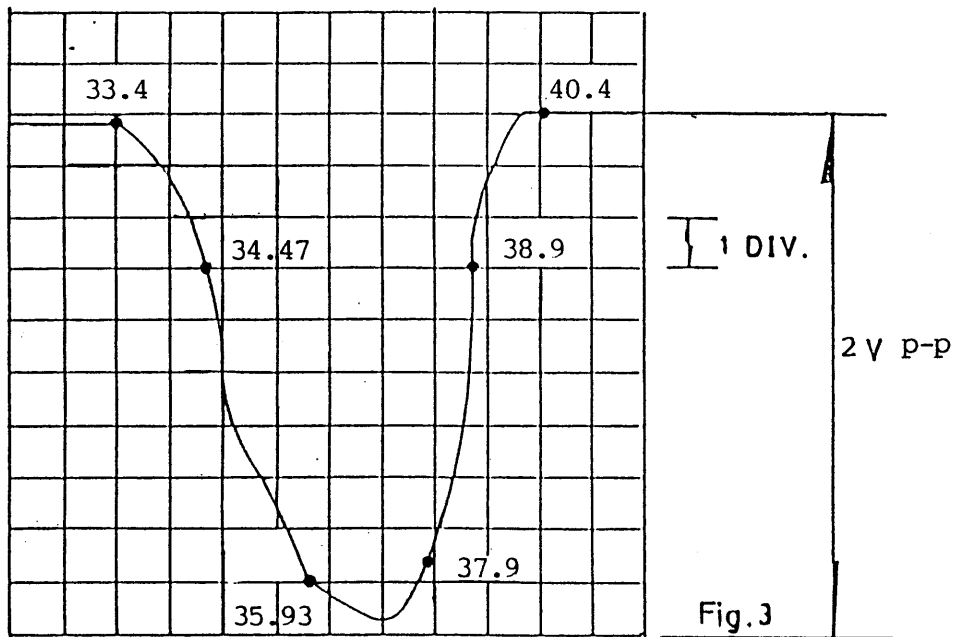

D. FINE AFC ALIGNMENT

1. Apply PAL I.F. signal (38.9 MHz) modulated with a color bar pattern to tuner test point.
2. The output of I.F. signal should be 80 dB.
3. Connect a digital voltmeter to TP203 and Ground.
4. Adjust L204 to obtain a reading of 4V.
5. Soldering the pads 'H' and 'I'.

## II. B+ ADJUSTMENT

- 1) Connect a digital voltmeter to TPB+ and ground.
- 2) Set Brightness, Contrast and colour to minimum.
- 3) Adjust VR501 and obtain a reading of 112V.

## III. AGC ALIGNMENT

- 1) Receive CH69 (UHF) and input field strength in 63dB  $\pm$ 3dB input.
- 2) Adjust VR201 to the point where noise is disappeared.

## IV. FOCUS ALIGNMENT

- 1) Set the brightness and contrast to middle position.
- 2) Receive a monoscope pattern.
- 3) Adjust focus control to obtain sharpest picture.

## V. HORIZONTAL CIRCUIT ADJUSTMENT

- 1) Receive Monoscope Pattern input signal 80 dBuV.
- 2) Adjust VR202 to obtain the picture at center.

## VI. VERTICAL CIRCUIT ADJUSTMENT

- 1) Receive the Monoscope Pattern.
- 2) Adjust VR402 to obtain a normal picture.

## VII. WHITE BALANCE ALIGNMENT STEP

- 1) Degauss the picture by degaussing coil if necessary.
- 2) Set VR601,602,603,604,605 and Sub-Brightness (VR101) to middle position.
- 3) Set screen Control, Brightness, Contrast and colour to Minimum.
- 4) Receive a black and white pattern.
- 5) Connect a digital meter between G2 and Ground on CRT Board.
- 6) Adjust screen on FBT to obtain a 300V.
- 7) Adjust VR601,602,603,604,605 to obtain uniformly white picture 9300°K.

## VIII. SUB-BRIGHTNESS ALIGNMENT

- 1) Receive a colour bar pattern.
- 2) Turn the brightness, contrast and colour to minimum.
- 3) Adjust VR101 until the brightest bar can just be seen.

VOLTAGE TABLE FOR IC

SYMBOL		U 201	SYMBOL		U 201	U 401	U 705
PIN NO.		TDA 8362	PIN NO.		TDA 8362	TDA 3653	TDA 1013B
1		3	43		3.8	1.1	0
2		5.6	44		2.9	0	7.6
3		5.6	45		3.9	1.2	16
4		5.5	46		3.9	0	15.6
5		7.9	47		2.5	15.6	1.2
6		3.8	48		4.7	25.6	6.7
7		3.3	49		1.2	1.2	2.2
8		1.7	50		3.5	5.8	2.8
9		0	51		4	25.4	0
10		7.6	52		6.6		
11		0					
12		3.2					
13		4.2					
14		3.3					
15		3.4					
16		0					
17		3.6					
18		2.1					
19		2.1					
20		2.1					
21		0.2					
22		3.4					
23		3.4					
24		3.4					
25		1.6					
26		1.6					
27		5.5					
28		3.9					
29		3.9					
30		3					
31		2.9					
32		1.7					
33		4.2					
34		3.6					
35		2					
36		7.9					
37		0.6					
38		1.2					
39		2.7					
40		3.8					
41		2.7					
42		2.8					

NOTE : VOLTAGE ARE TAKEN UNDER TUNED CONDITION WITH

CONTRAST : Maximum Position  
 BRIGHTNESS : Maximum Position  
 COLOR : Maximum Position  
 SIGNAL INPUT : 80 dBuV  
 CHANNEL SETTING : The Last Channel of UHF High  
 SIGNAL PATTERN : Colour Bar



VOLTAGE TABLE FOR IC

SYMBOL PIN NO.	U 202 TDA 4661				
1	5.2				
2	0				
3	0				
4	0				
5	1.4				
6	0				
7	0				
8	0				
9	5.2				
10	0				
11	2.9				
12	2.9				
13	0				
14	1.3				
15	0				
16	1.3				

NOTE : VOLTAGE ARE TAKEN UNDER TUNED CONDITION WITH

CONTRAST : Maximum Position  
 BRIGHNESS : Maximum Position  
 COLOR : Maximum Position  
 SIGNAL INPUT : 80 dBuV  
 CHANNEL SETTING : The Last Channel of UHF High  
 SIGNAL PATTERN : Colour Bar

VOLTAGE TABLE FOR IC

SYMBOL PIN NO.	U 101	U 102	U 405	U 501	U402
	CTV 322	24C01B1	7808	7805	7812
1	4.3	0	12	12	15
2	0.1	5	0	0	0
3	4.7	0	8	5	12
4	2.4	0			
5	4.9	2.6			
6	2.5	3			
7	0	5			
8	4.5	5			
9	1.6				
10	5				
11	0				
12	5.6				
13	5				
14	5				
15	5				
16	5				
17	5				
18	0.1				
19	5				
20	5				
21	0				
22	0				
23	0				
24	0				
25	0				
26	0.3				
27	-0.3				
28	5				
29	5				
30	0				
31	2.6				
32	2.1				
33	5				
34	5.4				
35	4.8				
36	0				
37	0				
38	0				
39	3				
40	2.7				
41	C				
42	5				

NOTE: VOLTAGE ARE TAKEN UNDER TUNED CONDITION WITH

CONTRAST : Maximum Position  
 BRIGHNESS : Maximum Position  
 COLOR : Maximum Position  
 SIGNAL INPUT : 80 dBuV  
 CHANNEL SETTING : The Last Channel of UHF High  
 SIGNAL PATTERN ; Colour Bar

VOLTAGE TABLE FOR IC

SYMBOL PIN NO.	U 901 SAA 5244AP	U 902 PC74HC T241P			
1	5	0			
2	2.1	0			
3	3.5	0			
4	0	0			
5	0	0			
6	5	0			
7	2	0			
8	2.2	0			
9	2.5	0			
10	5	0			
11	5	0			
12	1.8	0			
13	5	0			
14	0	0			
15	0	0			
16	0	0			
17	0	0			
18	4.1	0			
19	0	0			
20	0	5			
21	0.7				
22	0				
23	0				
24	3				
25	2.6				
26	0.7				
27	0.7				
28	0.8				
29	0				
30	0				
31	0.8				
32	0.7				
33	0.7				
34	0.8				
35	0.7				
36	0.8				
37	0.7				
38	0.8				
39	0.8				
40	0.7				

NOTE : VOLTAGE ARE TAKEN UNDER TUNED CONDITION WITH

CONTRAST : Maximum Position  
 BRIGHTNESS : Maximum Position  
 COLOR : Maximum Position  
 SIGNAL INPUT : 80 dBuV  
 CHANNEL SETTING : The Last Channel of UHF High  
 SIGNAL PATTERN : Colour Bar

VOLTAGE TABLE FOR TRANSISTOR							
SYMBOL	B (v)	C (V)	E (V)	SYMBOL	B (V)	C (V)	E (V)
Q101	0.6	1.2	0	Q402	-0.1	112.5	0
Q102	0	0	0	Q501	9.1	12.8	8.4
Q103	0	4.6	0	Q502	5.4	0	1.7
Q104	0	11.9	0	Q503	0	1.2	0
Q105	0.6	0	0	Q504	-2.6	293	0.07
Q106	12	0	12	Q505	0.6	0.06	0
Q107	12	0	12	Q506	113.1	113.7	113.8
Q108	11.1	11.7	12	Q507	113.7	113.8	113
Q201	2.3	11.7	1.6	Q601	2.6	129.2	2.1
Q202	1.4	4.8	0.8	Q602	2.5	128.3	1.9
				Q603	2.5	128.4	1.9
Q204	3.1	7.3	2.4	Q604	3.7	0	3.9
Q205	2.3	7.7	1.7	Q701	16.7	16.1	16.1
Q207	0	6.3	0				
Q208	3.6	7.9	2.9				
Q209	0	6.3	0				
Q210	0.7	0	0				
Q211	4.8	12	4.1				
Q401	0.5	0	0				

NOTE: VOLTAGE ARE TAKEN UNDER TUNED CONDITION WITH

CONTRAST : Maximum Position  
 BRIGHNESS : Maximum Position  
 COLOR : Maximum Position  
 SIGNAL INPUT : 80 dBuV  
 CHANNEL SETTING : The Last Channel of UHF High  
 SIGNAL PATTERN : Colour Bar

Print Date : 03/28/96

Page Number : 1

<< B.O.M. PRICE LIST FOR CUSTOMER >> - CURRENCY (USD)

PRODUCT CODE : 8813T0-240003-TV

DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

ASSEMBLY NUMBER	DESCRIPTION
-----	-----
155-892005-00-01	COMMON PART HANDSET ASS'Y (W/S.TXT)
180-8813T0-24-03	NON-COM PART ASS'Y PAL/BG W/SCART/1P.TXT
180-8813T0-24-CP	COMMON PART ASS'Y PAL/BG W/SCART/1P.TXT

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                    PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 2                         DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
-----	
*** ASSEMBLY :	155-892005-00-01 COMMON PART HANDSET ASS'Y (W/S.TXT)
107-800455-46	455K HZ RESONATOR CSB455EB MURATA CF701
113-101005-17	CARBON FILM RESISTOR 100 OHM 1/16W +-5% R704,706
113-102005-17	CARBON FILM RESISTOR 1K OHM 1/16W +-5% R705
113-103005-17	CARBON FILM RESISTOR 10K OHM 1/16W +-5% R702
113-109005-17	CARBON FILM RESISTOR 1 OHM 1/16W +-5% R709,710
113-473005-17	CARBON FILM RESISTOR 47K OHM 1/16W +-5% R703
113-682005-17	CARBON FILM RESISTOR 6.8K OHM 1/16W +-5% R701
127-476042-03	ELECT. CAP. 47 MFD 16V +-20% C701
130-600101-00	INFRARED EMITTER EL-1L1 KODENSHI LED701
131-210719-29	TRANSISTOR 2SA719R/S MATSUSHITA Q702
131-230945-00	TRANSISTOR 2SC945 NEC Q701
133-803010-33	I.C. SAA3010T PHILIPS IC701
172-626006-42	UL 1007 TOP COAT WIRE AWG 26 60MM RED 10 X 10 MM P.C.B. (+) TO BATTERY CONTACT PLATE (+)
172-626008-40	UL 1007 TOP COAT WIRE AWG 26 80MM BLACK 10 X 10 MM P.C.B. (-) TO BATTERY CONTACT PLATE (-)
190-892002-00	REMOTE P.C.B. (200791)
516-260408-10	SELF-TAPPING SCREW 2.6 X 8 P/T(HARDEN) CAB. MTG.
773-036863-00	BATTERY CONTACT PLATE (A) +-VE
773-036864-00	BATTERY CONTACT PLATE +VE
774-036862-00	BATTERY CONTACT SPRING -VE
810-041004-13	POLYBAG 4" X 10" X 0.04MM W/RE-CYCLING MARK FOR HANDSET
849-892002-00	CONTACT RUBBER KEY PAD (34 KEYS)
892-892002-12	DIAL KEY PLATE - TEAC DESIGN (RC-551)
900-892010-01	HANDSET TOP CABINET - BLACK MOULDED
902-892010-01	HANDSET BOTTOM CABINET - BLACKMOULDED
910-892001-01	BATTERY DOOR
964-892001-00	SENSOR LENS

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                    PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 3                        DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
-----	
*** ASSEMBLY :	180-8813T0-24-03 NON-COM PART ASS'Y PAL/BG W/SCART/1P.TX1
002-114022-40	14" CRT #37SX110Y22-DC05A S/H CAI HONG
003-131424-02	TUNER OSCAR UVE33-W24/R16-3649MITSUMI UV201
008-550151-05	DEGAUSSING COIL 40T                    (W/FIVE LAYERS OF TAPE) L601
113-561105-17	CARBON FILM RESISTOR 560 OHM 1/4W +-5% R134,135,136
123-222466-41	CERAMIC CAP. 0.0022 MFD 400V +-20% ECK-DNS222MEX MATSUSHI C512,523
133-100322-33	PHILIPS IC PCA CTV322S U101
162-110010-00	ANTENNA MATCHING TRANSFORMER (300 OHM TO 75 OHM)
166-162030-00	SPEAKER 3" 2W 16 OHM "TCL"
171-550084-02	84" AC LINE CORD (END-CUT)SAA APPW/7.5A PLUG.
172-726000-99	BARE WIRE 54MM J088,090,093,095,097-098,103-104,084,085,W123
186-227503-14	BATTERY 3A
191-400042-07	4 PINS SOCKET ASS'Y AWG 20 420MM
610-881301-0X	GIFT BOX - TEAC DESIGN
663-230512-95	SERIAL NO.LABEL - OC:GT-512/95
663-230542-95	SERIAL NO.LABEL - OC:GT-542/95 1 PC STUCK ON CTN, 1 PC STUCK ON RATING LABEL
669-881301-09	RATING LABEL - TEAC DESIGN
670-881300-0J	INSTRUCTION MANUAL - TEAC            DESIGN {40 PROG}
678-881303-06	TOTAL CARE STICKER - TEAC            DESIGN (BLK & WHITE)
678-881304-02	SCREEN STICKER - TEAC DESIGN ATTACH TO TOP RIGHT OF SCREEN
678-922109-01	EASY TUNE CARD - TEAC DESIGN
690-922139-01	WARRANTY CARD- TEAC (A) DESIGN
693-881300-21	EAN CODE LABEL - 9313060006525
782-721952-04	DOUBLE ROD ANTENNA 520MM
810-303004-14	POLYBAG 30"X30"X0.04MM W/PUNCHHOLE/RE-CYCLING MARK(P/O MAT FOR UNIT
826-221505-00	FOAM SHEET 22" X 15" X 0.5MM FOR UNIT
884-881304-01	JACK COVER PLATE - TEAC DESIGN
884-881321-01	PRESET PLATE - BLACK W/L.GREY S.S. ENG STD (4 KEY HOLES)
887-881302-01	COVER PLATE (L) - BLANK
900-881303-02	FRONT CABINET - MATT BLACK SPY(NEW MOULDED)
902-881305-U1	REAR CABINET - MOULDED BLACK SPRAY (UL)
917-881302-02	REMOTE LENS - RED W/ GOLD SS. ENG STD (B)
919-881301-74	PRESET DOOR - TEAC (A) DESIGN (W/CABLE READY WORDING)
973-881304-01	VOLUME / CHANNEL KNOB SET -        BLACK MOULDED (B)
986-931301-06	NAME PLATE - TEAC DESIGN
991-881301-01	POWER KNOB - BLACK MOULDED

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                    PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 4                         DESCRIPTION : 8813B TEAC PAL/BG W/SCART/

Component Part	Description / Location	
*** ASSEMBLY : 180-8813T0-24-CP COMMON PART ASS'Y PAL/BG W/SCART/1P.TXT		
001-214189-05	FLYBACK TRANSFORMER 154-189H	GOLDSTAR "FOR CAIHONG CRT"
	T402	
012-102330-06	SEMI-FIXED RESISTOR EVND2AA	03B13 1KB
	VR601,602	
012-102340-06	SEMI-FIXED RESISTOR EVND8AA	03B13 1KB
	VR402,501	
012-103340-06	SEMI-FIXED RESISTOR EVND8AA	03B14 10KB
	VR202	
012-502330-06	SEMI-FIXED RESISTOR EVND2AA	03B53 5KB
	VR603,604,605	
012-502340-06	SEMI-FIXED RESISTOR EVND8AA	03B53 5KB
	VR201	
012-503340-06	SEMI-FIXED RESISTOR EVND8AA	03B54 50KB
	VR101	
101-190710-96	HORIZONTAL DRIVE TRANSFORMER	R0710
	T401	
101-288820-95	LINE FILTER 70MH	
	T501	
101-414025-94	SWITCHING POWER TRANSFORMER	(HL4025B)
	T502	
102-370600-02	TANK COIL / AFC COIL COILS	707851
	L204	
105-100101-02	FIXED INDUCTIVE COIL 10UH	+ -10%
	L102,205	
105-109101-02	FIXED INDUTIVE COIL 1.0 UH 10%	
	L201,202,208,209	
105-121101-02	FIXED INDUCTIVE COIL 120UH	+ -10%
	L601	
105-201106-02	CHOKE COIL 200UH 10% CH9012-	201K (ELEC PRODUCT)
	L502	
105-399101-02	FIXED INDUCTIVE COIL 3.9 UH	10%
	L901	
105-650052-01	LINEARITY COIL 34UH FOR 21"	CRT
	L401	
105-689101-02	FIXED INDUCTIVE COIL 6.8UH 10%	
	L203	
107-105500-66	SOUND TRAP CERAMIC FILTER	5.5MHZ TPS-5.5MB MURATA
	CF201	
107-305500-16	SOUND BYPASS CERAMIC FILTER	5.5MHZ SFE-5.5MB MURATA
	CF204	
107-738916-00	SAW FILTER TSF-5316 SANYO	
	SAW201A	
113-100105-17	CARBON FILM RESISTOR 10 OHM	1/4W +-5%
	R209	
113-101105-17	CARBON FILM RESISTOR 100 OHM	1/4W +-5%
	R137,160,161,208,229,230,231,240,131,911,147,148	
113-101105-17	CARBON FILM RESISTOR 100 OHM	1/4W +-5%
	R903	



\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                    PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 5                         DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
113-102105-17	CARBON FILM RESISTOR 1K OHM 1/4W +-5% R106,138,139,157,216,221,225,233,275,905,256,207
113-102105-17	CARBON FILM RESISTOR 1K OHM 1/4W +-5% R252,253,254,255,281,251
113-102305-75	METAL OXIDE FILM RESISTOR 1K OHM 1W +-5% R432
113-103101-67	METAL FILM RESISTOR 10K OHM 1/4W +-1% R101,102
113-103105-17	CARBON FILM RESISTOR 10K OHM 1/4W +-5% R103,105,140,201,415,249,165,627,914
113-103105-17	CARBON FILM RESISTOR 10K OHM 1/4W +-5% R424,425,508,528,154,141
113-103205-12	CARBON FILM RESISTOR 10K OHM 1/2 +-5% R411
113-103405-75	METAL OXIDE FILM RESISTOR 10K OHM 2W +-5% R526
113-104105-17	CARBON FILM RESISTOR 100K OHM 1/4W +-5% R107,108,119,239,243,244,417
113-104205-12	CARBON FILM RESISTOR 100K OHM 1/2W +-5% R521
113-104305-75	METAL OXIDE FILM RESISTOR 100KOHM 1W +-5% R531
113-105101-67	METAL FILM RESISTOR 1M OHM 1/4W +-1% R246
113-120305-75	METAL OXIDE FILM RESISTOR 12 OHM 1W +-5% R512
113-120405-75	METAL OXIDE FILM RESISTOR 12 OHM 2W +-5% R519
113-121105-17	CARBON FILM RESISTOR 120 OHM 1/4W +-5% R262
113-122105-17	CARBON FILM RESISTOR 1.2K OHM 1/4W +-5% R206,248,617,162
113-123105-17	CARBON FILM RESISTOR 12K OHM 1/4W +-5% R210
113-151105-17	CARBON FILM RESISTOR 150 OHM 1/4W +-5% R223
113-151205-12	CARBON FILM RESISTOR 150 OHM 1/2W +-5% R421
113-152105-17	CARBON FILM RESISTOR 1.5K OHM 1/4W +-5% R622,621,250
113-152205-12	CARBON FILM RESISTOR 1K5 OHM 1/2W +-5% R610,611,612
113-153105-17	CARBON FILM RESISTOR 15K OHM 1/4W +-5% R245,402
113-153405-75	METAL OXIDE FILM RESISTOR 15K OHM 2W +-5% R604,605,606
113-159405-42	NON-FLAMMABLE FUSE RESISTOR 1.5 OHM 2W +-5% R620
113-180105-17	CARBON FILM RESISTOR 18 OHM 1/4 +- 5% R26A

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 6                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
113-181105-17	CARBON FILM RESISTOR 180 OHM 1/4W +-5% R222
113-182105-17	CARBON FILM RESISTOR 1.8K OHM 1/4W +-5% R506,602,274
113-183105-17	CARBON FILM RESISTOR 18K OHM 1/4W +-5% R418,721
113-184105-17	CARBON FILM RESISTOR 180K OHM 1/4W +-5% R120
113-221105-17	CARBON FILM RESISTOR 220 OHM 1/4W +-5% R142,238,213,908,909,910
113-221305-75	METAL OXIDE FILM RESISTOR 220 OHM 1W +-5% R419
113-222105-17	CARBON FILM RESISTOR 2.2K OHM 1/4W +-5% R130,224,272,151
113-222205-12	CARBON FILM RESISTOR 2.2K OHM 1/2W +-5% R715
113-223101-67	METAL FILM RESISTOR 22K OHM 1/4W +-1% R412,111
113-223105-17	CARBON FILM RESISTOR 22K OHM 1/4W +-5% R109,110,114,143,144,146,158,124,150,525,713,912
113-223105-17	CARBON FILM RESISTOR 22K OHM 1/4W +-5% R722,232
113-224105-17	CARBON FILM RESISTOR 220K OHM 1/4W +-5% R719,155
113-229205-12	CARBON FILM RESISTOR 2.2 OHM 1/2W +-5% R279
113-229305-75	METAL OXIDE FILM RESISTOR 2.2 OHM 1W +-5% R426
113-229405-75	METAL OXIDE FILM RESISTOR 2.2 OHM 2W +-5% R503,427
113-270405-75	METAL OXIDE FILM RESISTOR 27 OHM 2W +-5% R513
113-272105-17	CARBON FILM RESISTOR 2.7K OHM 1/4W +-5% R618,613,614,615,616
113-272205-12	CARBON FILM RESISTOR 2.7K OHM 1/2W +-5% R403,520
113-273105-17	CARBON FILM RESISTOR 27K OHM 1/4W +-5% R211,241,902
113-274205-12	CARBON FILM RESISTOR 270K OHM 1/2W +-5% R410
113-331105-17	CARBON FILM RESISTOR 330 OHM 1/4W +-5% R509
113-332102-17	CARBON FILM RESISTOR 3.3K OHM 1/4W +-2% R505
113-332105-17	CARBON FILM RESISTOR 3.3K OHM 1/4W +-5% R152,153,235,269,266,901
113-332605-75	METAL OXIDE FILM RESISTOR 3K3 OHM 5W +-5% R406
113-333105-17	CARBON FILM RESISTOR 33K OHM 1/4W +-5% R416,125

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                   PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 7                         DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
113-334305-75	METAL OXIDE FILM RESISTOR 330KOHM 1W +-5% R514
113-338405-75	METAL OXIDE FILM RESISTOR 0.330OHM 2W +-5% R516
113-339105-17	CARBON FILM RESISTOR 3.3 OHM 1/4W +- 5% R720
113-339405-42	NON-FLAMMABLE FUSE RESISTOR 3.3 OHM 2W +-5% R716
113-390605-75	METAL OXIDE FILM RESISTOR 39 OHM 5W +-5% R517
113-391105-17	CARBON FILM RESISTOR 390 OHM 1/4W +-5% R607,608,609,112
113-391305-75	METAL OXIDE FILM RESISTOR 390 1W +-5% R270
113-392105-17	CARBON FILM RESISTOR 3.9K OHM 1/4W +-5% R414
113-470105-17	CARBON FILM RESISTOR 47 OHM 1/4W +-5% R220,204
113-470205-12	CARBON FILM RESISTOR 47 OHM 1/2W +-5% R405
113-470405-75	METAL OXIDE FILM RESISTOR 47 OHM 2W +-5% R530
113-471105-17	CARBON FILM RESISTOR 470 OHM 1/4W +-5% R601
113-472105-17	CARBON FILM RESISTOR 4.7K OHM 1/4W +-5% R228,205,267,247,422,511,906,907,115
113-473105-17	CARBON FILM RESISTOR 47K OHM 1/4W +-5% R202,203,159,149,277,626
113-479605-51	WIRE WOUND CEMENT RES. 4.7 OHM5W +-5% R502
113-512105-17	CARBON FILM RESISTOR 5.1K OHM 1/4W +-5% R276
113-560105-17	CARBON FILM RESISTOR 56 OHM 1/4W +-5% R260
113-561105-17	CARBON FILM RESISTOR 560 OHM 1/4W +-5% R298,299
113-562105-17	CARBON FILM RESISTOR 5.6K OHM 1/4W +-5% R723,724
113-565205-92	CARBON COMPOSITION RESISTOR 5.6M 1/2W +-5% R523,524
113-681105-17	CARBON FILM RESISTOR 680 OHM 1/4W +-5% R156
113-682102-17	CARBON FILM RESISTOR 6.8K OHM 1/4W +-2% R504
113-682105-17	CARBON FILM RESISTOR 6.8K OHM 1/4W +-5% R510,227,280,712
113-688205-42	FUSING RESISTOR 0.68 OHM 1/2W +-5% R518
113-688305-42	FUSING RESISTOR 0.68 OHM 1W +-5% R529,408,409

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 8                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
113-750105-17	CARBON FILM RESISTOR 75 OHM 1/4W +-5% R257,258,259,261,226
113-821105-17	CARBON FILM RESISTOR 820 OHM 1/4W +-5% R212
113-822105-17	CARBON FILM RESISTOR 8.2K OHM 1/4W +-5% R507,113,123,273
113-823105-17	CARBON FILM RESISTOR 82K OHM 1/4W +-5% R237
113-824105-17	CARBON FILM RESISTOR 820K OHM 1/4W +-5% R242,264
114-210200-01	THERMISTOR (NICHICON ZPB53 BL 200C) R501
123-100340-93	CERAMIC CAP. 10 PF 50V +-5% (NPO) C902
123-101350-60	CERAMIC CAP. 100 PF 50V +-10% (SL TYPE) C116,117,118,119,121
123-102350-90	CERAMIC CAP. 0.001 MFD 50V +-10% (B TYPE) C207,215,210,235,236,417,401,904
123-102850-10	CERAMIC CAP. 0.001 MFD 2KV +-10% MATSUSHITA C604,405
123-103370-90	CERAMIC CAP. 0.01 MFD 50V +80 -20% C120,208,209,125,757
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C110,111,112,127,226,227,228,231,244,242,748
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C245,246,258,263,427,429,430,519,520,734,750
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C901,905,906,907,908,910
123-150340-93	CERAMIC CAP. 15 PF 50V +-5% (NPO) C214,249,903
123-152850-10	CERAMIC CAP. 0.0015 MFD 2KV +-10% MATSUSHITA C433
123-221350-60	CERAMIC CAP. 220 PF 50V +-10% (SL TYPE) C601,602,603
123-221551-90	CERAMIC CAP. 220 PF 500V +-10% MATSUSHITA C513
123-222350-90	CERAMIC CAP. 0.0022 MFD 50V +-10% (B TYPE) C128
123-223370-90	CERAMIC CAP. 0.022 MFD 50V +80-20% C211,261,234,237,250,256,232,243
123-270340-93	CERAMIC CAP. 27PF 50V +-5% (NPO) C122,123
123-471350-60	CERAMIC CAP. 470 PF 50V +-10% (SL TYPE) C758,759
123-472550-90	CERAMIC CAP. 0.0047 MFD 500V +-10% (B TYPE) C410,411,515
123-472552-90	CERAMIC CAP. 0.0047 MFD 500V +-10% (B TYPE) SMALL SIZE C503,504,505
123-680340-93	CERAMIC CAP. 68 PF 50V +-5% (NPO) C217

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                    PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 9                         DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
123-681350-90	CERAMIC CAP. 680 PF 50V +-10% (B TYPE) C423
123-821850-10	CERAMIC CAP. 820 PF 2KV +-10% (SL TYPE) MATSUSHITA C516
126-104071-01	MYLAR CAP. 0.1 MFD 50V +-10% C218,416,418,510,101,255
126-104101-31	POLYPROPYLENE CAP. 0.1 MFD        100V +-10% C412
126-222071-01	MYLAR CAP. 0.0022 MFD 50V        +-10% C114,754,251
126-222161-41	METALIZED POLYPROPYLENE CAP.        0.0022 MFD 1600V +-10% C440,402,511
126-223071-01	MYLAR CAP. 0.022 MFD 50V +-10% C220,909
126-224071-01	MYLAR CAP 0.22 MFD 50V +-10% C102,201,752
126-332161-41	METALIZED POLYPROPYLENE CAP.        0.0033 MFD 1600V +-10% C404
126-333071-01	MYLAR CAP. 0.033 MFD 50V +-10% C507
126-392071-01	MYLAR CAP. 0.0039 MFD 50V        +-10% C213
126-472071-01	MYLAR CAP. 0.0047 MFD 50V        +-10% C247,253,254,736,421,422
126-473071-01	MYLAR CAP. 0.047 MFD 50V +-10% C223,224
126-473201-31	POLYPROPYLENE CAP. 0.047 MFD        200V +-10% C403,441
126-473211-41	METALLIZED POLYPROPYLENE CAP        0.047 MFD 250V +-10% VDE C502,501
126-474071-01	MYLAR CAP. 0.47 MFD 50V +-10% C222
126-474201-31	POLYPROPYLENE CAP 0.47 MFD        200V +-10% C413
127-105071-05	ELECT CAP. 1 MFD 50V +-10%        (TIME CONSTANT) C419
127-105072-03	ELECT. CAP. 1 MFD 50V +-20% C202,203,204,225,230,252,749,426,518
127-105132-03	ELECT. CAP. 1 MFD 160V        +-20% C414
127-106042-03	ELECT. CAP. 10 MFD 16V +-20% C104,105,273,219,229,260,124,264
127-106072-03	ELECT. CAP. 10 MFD 50V +-20% C509
127-106252-03	ELECT. CAP. 10 MFD 250V +-20% C407
127-107042-03	ELECT. CAP. 100 MFD 16V +-20% C431,432,521,428,605
127-107062-03	ELECT. CAP. 100 MFD 35V +-20% C425

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96            PRODUCT CODE : 8813T0-240003-TV  
Page Number : 10                DESCRIPTION : 8813B TEAC PAL/BG W/SCART/3

Component Part	Description / Location
127-107132-03	ELECT. CAP. 100 MFD 160V +-20%"NICHICON" C408,517
127-107402-03	ELECT. CAP. 100 MFD 400V +-20% C506
127-108052-03	ELECT. CAP. 1000 MFD 25V +-20% C406,733
127-225042-23	ELECT. CAP. BIPOLAR 2.2MFD 16V+-20% C216
127-225072-03	ELECT. CAP 2.2 MFD 50V +-20% C205,126,259,262,257
127-226042-03	ELECT. CAP. 22 MFD 16V +-20% C109,753
127-227042-03	ELECT. CAP. 220 MFD 16V +-20% C221
127-227062-03	ELECT. CAP. 220 MFD 35V +-20% C424,514
127-228052-03	ELECT. CAP. 2200 MFD 25V +-20% C420
127-476042-03	ELECT. CAP. 47 MFD 16V +-20% C206,233,265,266,267,212,911
127-476072-07	ELECT.CAP. 47 MFD 50V +-20%    NICHICON C508
127-476072-07	ELECT.CAP. 47 MFD 50V +-20%    NICHICON C745
127-477062-03	ELECT CAP. 470 MFD 35V +-20% C434,751
130-134148-01	SILICON DIODE IN4148 D101,102,105,111,112,113,116,208,210,408,217,114
130-134148-01	SILICON DIODE IN4148 D103,117,118,119,209,121,605,606,607,129
130-310012-50	DIODE BAX12A D407
130-310033-50	DIODE BYD33D D403,404,405,510
130-310062-50	DIODE BAW 62 D203,204,205,206,401,402
130-310095-50	DIODE BYW95B D511
130-310133-50	DIODE BYD33J D406,507,508,509
130-311441-64	BRIDGE RECTIFIER 1J4B41            TOSHIBA D501
130-410039-01	ZENER DIODE 3.9V D211
130-410051-01	ZENER DIODE 5.1V 1/2W +-5% D212
130-410075-01	ZENER DIODE 7.5V 1/2W D213
130-410082-01	ZENER DIODE 8.2V D505

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96            PRODUCT CODE : 8813T0-240003-TV  
Page Number : 11                DESCRIPTION : 8813B TEAC PAL/BG W/SCART/:

Component Part	Description / Location
130-410120-02	ZENER DIODE 12V HZ12A2 D608
130-410574-00	ZENER DIODE UPC 574J NEC OR KA33V SAMSUNG U502
130-411091-01	ZENER DIODE 9.1V D506
130-512044-00	LED 3MM RED 204HDC FOR LED 601
131-111402-03	TRANSISTOR ED1402C Q102,103,104,105,202,208,207,211,210,209,606
131-111602-03	TRANSISTOR ED1602C (PHILIPS) Q106,107,108
131-170547-02	TRANSISTOR BC 547B PHILIPS Q501,503
131-170548-02	TRANSISTOR BC 548B PHILIPS. Q204,205,901
131-170557-02	TRANSISTOR BC 557B PHILIPS Q502
131-170558-02	TRANSISTOR BC 558B PHILIPS Q604
131-190370-00	TRANSISTOR BF 370 PHILIPS. Q201
131-190422-00	TRANSISTOR BF422 PHILIPS Q601,602,603
131-202508-62	TRANSISTOR BU 2508 DF PHILIPS Q402
131-232482-00	TRANSISTOR 2SC2482 TOSHIBA Q401
131-235287-01	TRANSISTOR 2SC5287 SANKEN Q504
131-265401-00	TRANSISTOR 2N 5401 PHILIPS Q506
131-265551-00	TRANSISTOR 2N 5551 PHILIPS Q505
131-370135-00	TRANSISTOR BD 135 PHILIPS Q701
131-462369-00	TRANSISTOR PH2369 PHILIPS Q101
131-480011-00	TRANSISTOR BUT 11 PHILIPS Q507
133-102411-31	I.C. ST24C01B1 SGS U102
133-104661-33	I.C. TDA 4661 PHILIPS IC U202
133-115254-33	I.C. SAA5254P/T PHILIPS U901
133-118362-33	I.C. TDA8362 N4S7 PHILIPS U201
133-201013-33	I.C. TDA1013B PHILIPS U705

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 12                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/:

Component Part	Description / Location	
133-203653-33	I.C. TDA3653B PHILIPS U401	
133-207805-31	I.C. L7805CV SGS U501	
133-207808-31	IC L7808C-V SGS-THOMSON U405	
133-207812-31	IC L7812CV SGS-THOMSON U402	
133-304241-33	I.C. PC74HCT241P PHILIPS U902	
133-404053-33	I.C. HEF4053BP PHILIPS U204	
136-500002-00	REMOTE RECEIVER (HC-SZ02) IR101	
137-100000-31	CRYSTAL 10 MHZ HOORAY X101	
137-270000-30	CRYSTAL 27 MHZ NDK X901	
137-443618-20	CRYSTAL 4.43 MHZ X201	
146-100001-14	POWER SWITCH (ESB-99957S COST COST REDUCTION) SW501	
146-100002-13	TACT SWITCH KSM0634A HDK S10,S15,S2,S22	
146-104016-13	TACT SWITCH 31TM116A UNITRONIC S11,S12,S16,S17	
160-101001-08	PIN CONNECTOR 1 PIN PLUG                      STRAIGHT FOR CN601,501,502	
160-102255-27	PIN CONNECTOR 2 PINS PLUG                      STRAIGHT (UL) (S.H.S) CN701	
160-102805-08	PIN CONNECTOR 2 PIN PLUG                      STRAIGHT CN503	
160-104805-08	PIN CONNECTOR 4 PIN PLUG                      STRAIGHT CN401	
160-105255-27	PIN CONNECTOR 5 PINS WAFER                      2.5 PITCH CN201	
161-540105-00	CRT SOCKET ISL-01 IN CHANG SK601	
161-683702-22	21 PIN SOCKET SK201	
172-620005-40	UL 1007 TOP COAT WIRE AWG 20                      50MM BLACK 5 X 5MM U705 PIN `1' TO `9'	
172-620012-40	UL 1007 TOP COAT WIRE AWG 20                      120MM BLACK 10 X 10 MM MAIN P.C.B. `E1' TO `E2'	
172-620036-40	UL 1007 TOP COAT WIRE AWG 20                      360MM BLACK 10 X 10MM CN402 `2' TO CRT P.C.B. `GND'	
172-626008-40	UL 1007 TOP COAT WIRE AWG 26                      80MM BLACK 10 X 10 MM Q402 LUG TO PCB `K',Q504 LUG TO PCB `L'	
172-626008-40	UL 1007 TOP COAT WIRE AWG 26                      80MM BLACK 10 X 10 MM U401 LUG TO PCB `M'	



\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 13                            DESCRIPTION : 8813B TEAC PAL/BG W/SCART/:

Component Part	Description / Location
172-626018-42	UL 1007 TOP COAT WIRE AWG 26 180MM RED 10 X 10 MM MAIN P.C.B. `W1' TO `W2'
172-626022-46	UL 1007 TOP COAT WIRE AWG 26 220MM BLUE 10 X 10 MM MAIN P.C.B. `R2' TO `R2'
172-626026-42	UL 1007 TOP COAT WIRE AWG 26 260MM RED MAIN P.C.B. `C1' TO `C3'
172-626030-42	UL 1007 TOP COAT WIRE AWG 26 300MM RED MAIN P.C.B. `O' TO `O'
172-626036-40	UL1007 TOP COAT WIRE AWG26 360MM BLACK 10 X 10MM FROM U401 PIN 8 TO CRT PCB `F'
172-626036-43	UL 1007 TOP COAT WIRE AWG 26 360MM ORANGE 10 X 10MM CN402 `1' TO CRT P.C.B. `F.F.'
172-626036-44	UL 1007 TOP COAT WIRE AWG 26 360MM YELLOW 10 X 10MM CN402 `3' TO CRT P.C.B. `180V'
172-726000-99	BARE WIRE 54MM J001-019,021,024-029,031,033-060,064-072,075-076
172-726000-99	BARE WIRE 54MM J080,087,106,601,077,078,020,108,023,W122-123,R104
172-830080-99	FLAT BRIDED WIRE 1200MM CRT GROUND
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `1' TO CN203 `1',CN202 `2' TO CN203 `2'
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `3' TO CN203 `3',CN202 `4' TO CN203 `4'
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `5' TO CN203 `5'
179-001010-00	OIL SLEEVING 1 MM DIA. 20MM FOR R26A,20MM FOR D511,20MM FOR BR501
179-001010-00	OIL SLEEVING 1 MM DIA. 20MM FOR R516, 20MM FOR R406, 20MM FOR R411
179-105000-00	UL PVC TUBE 5MM DIA L=80MM FOR AC LINE CORD
179-105000-00	UL PVC TUBE 5MM DIA 260MM FOR CN201
179-110500-00	UL PVC TUBE 11MM DIA. FOR AC LINE CORD
179-405030-00	5 MM DIA SHRINKABLE TUBE L=120MM, 60MM FOR AC LINE CORD,60MM FOR X,Y WIRE
182-222000-03	FUSE T2A 250V F501
190-881312-P1	MAIN P.C.B. (120196)
190-931302-P0	CRT P.C.B. (270195)
191-100034-09	1 PIN SOCKET ASSM'Y L=220MM CRT GND TO CN601
191-101003-07	1 PIN SOCKET ASSM'Y BLUE            L=320MM MAIN P.C.B. `X1' TO CN502
191-101004-07	1 PIN SOCKET ASSM'Y RED            L=320MM MAIN P.C.B. `Y1' TO CN501
191-200030-09	2 PIN SOCKET ASSM'Y L=300MM CN207 `1' TO SPK. `+', `2' TO SPK. `-'

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 14                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `1' TO CRT PCB `A'
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `2' TO CRT PCB `B'
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `3' TO CRT PCB `C'
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `4' TO CRT PCB `D'
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `5' TO CRT PCB `E'
504-305006-10	MACHINE SCREW 3 X 6 B/M U402,405,501
504-305012-10	MACHINE SCREW 3 X 12 B/M FOR HEAT SINK (B)
514-400435-10	SELF-TAPPING SCREW 4 X 35 B/T (HARDEN) REAR CAB. TO FRONT CAB.
514-500435-10	SELF-TAPPING SCREW B/T 5 X 35 HEAD DIA. =8.5MM (MAX) (HARDE 2 FOR REAR CAB. TO FRONT CAB., 4 FOR CRT MTG.
516-260408-10	SELF-TAPPING SCREW 2.6 X 8 P/T(HARDEN) FOR VOLUME KNOB SET
517-303312-10	SELF-TAPPING SCREW 3 X 12 W/A W/H=7MM (HARDEN) FOR HEAT SINK (A) & (C)
520-305025-55	NUT M3 T=2.5 OD=5.5 FOR HEAT SINK (B)
580-101261-01	CABLE TIE L=100MM FOR CRT BOARD , CONNECTOR ,SPEAKER
622-882802-00	FELT L240 X W17 X TO.5MM              W/TAPE FOR REAR CAB.
744-881301-00	SPRING FOR C.R.T. MOUNTING 5.2 X 42 X 0.6MM
746-063101-00	TEST PIN:TOTAL LENGTH 18.6MM THK:0.8MM MAIN P.C.B. `F',`G',`J'
746-063101-01	AC LINE CORD PIN FOR AC LINE CORD -2, (X), (Y) WIRE -2
750-063101-00	SOLDERING LUG LEG:8X4MM FOR U401,Q402,Q504
766-686801-00	FUSE HOLDER
777-881301-00	SPRING IN 10 X L12 FOR POWER KNOB
779-882001-01	IRON HEAT SINK (D) U402,405,501
781-882001-02	ALUMINIUM HEAT SINK (B) FOR Q402
781-882102-02	ALUMINIUM HEAT SINK (A) FOR Q504
781-892001-00	ALUMINIUM HEAT SINK (C) FOR U401
783-931304-02	SHIELD CAN
783-931305-02	SHIELD CAN COVER
800-881311-00	POLYFOAM (1)

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96            PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 15                DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1

Component Part	Description / Location
800-881312-00	POLYFOAM (2)
800-881313-00	POLYFOAM (3)
800-881314-00	POLYFOAM (4)
810-052204-14	POLYBAG 5" X 22" X 0.04MM      PO MAT W/RE-CYCLING MARK FOR AC LINE CORD
810-091504-13	POLYBAG 9" X 15" X 0.04MM W/    RE-CYCLING MARK FOR INSTRUCTION MANUAL
834-230801-00	RUBBER WASHER OD=23 , ID=8 ,    T=1.0 FOR CRT MTG.ADJUSTMENT
834-230802-00	RUBBER WASHER OD=23, ID=8, T=2 CRT MTG. DOWN
834-230805-00	RUBBER WASHER OD=23 ID=8 T=0.5 CRT MTG. UP
840-011024-21	PAD CORD L240 X W10 X T1 MM    W/TAPE FOR BETWEEN CRT AND FRONT CAB.
840-051030-11	RUBBER PAD (ONE SIDE W/TAPE) MAIN P.C.B. (1 UNDER POWER TRANSFORMER T502) &
840-051030-11	RUBBER PAD (ONE SIDE W/TAPE) (1 BETWEEN HEAT SINK A.B. ON COPPER SIDE)
840-051520-11	RUBBER PAD (ONE SIDE W/TAPE) MAIN P.C.B. (UNDER FBT)
929-881301-00	LED HOLDER BKT FOR LED601
939-881302-00	POWER SWITCH ADAPTOR
948-881302-00	DEGAUSSING COIL MTG. CLIP
954-882803-00	HIGH VOLTAGE CABLE SPACER

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 2                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount	
*** ASSEMBLY : 155-892005-00-01 COMMON PART HANDSET ASS'Y (W/S.TXT)							
107-800455-46	455K HZ RESONATOR CSB455EB CF701	MURATA	PC	0	1.00000	0.2146	0.214600
113-101005-17	CARBON FILM RESISTOR 100 OHM 1/16W +-5% R704,706		PC	0	2.00000	0.0046	0.009200
113-102005-17	CARBON FILM RESISTOR 1K OHM 1/16W +-5% R705		PC	0	1.00000	0.0046	0.004600
113-103005-17	CARBON FILM RESISTOR 10K OHM 1/16W +-5% R702		PC	0	1.00000	0.0046	0.004600
113-109005-17	CARBON FILM RESISTOR 1 OHM 1/16W +-5% R709,710		PC	0	2.00000	0.0046	0.009200
113-473005-17	CARBON FILM RESISTOR 47K OHM 1/16W +-5% R703		PC	0	1.00000	0.0046	0.004600
113-682005-17	CARBON FILM RESISTOR 6.8K OHM 1/16W +-5% R701		PC	0	1.00000	0.0046	0.004600
127-476042-03	ELECT. CAP. 47 MFD 16V +-20% C701		PC	0	1.00000	0.0288	0.028800
130-600101-00	INFRARED EMITTER EL-1L1 LED701	KODENSHI	PC	0	1.00000	0.1058	0.105800
131-210719-29	TRANSISTOR 2SA719R/S Q702	MATSUSHITA	PC	0	1.00000	0.0615	0.061500
131-230945-00	TRANSISTOR 2SC945 NEC Q701		PC	0	1.00000	0.0440	0.044000
133-803010-33	I.C. SAA3010T PHILIPS IC701		PC	0	1.00000	0.8187	0.818700
172-626006-42	UL 1007 TOP COAT WIRE AWG 26 60MM RED 10 X 10 MM P.C.B. (+) TO BATTERY CONTACT PLATE (+)		PC	0	1.00000	0.0021	0.002100
172-626008-40	UL 1007 TOP COAT WIRE AWG 26 80MM BLACK 10 X 10 MM P.C.B. (-) TO BATTERY CONTACT PLATE (-)		PC	0	1.00000	0.0026	0.002600
190-892002-00	REMOTE P.C.B. (200791)		PC	0	1.00000	0.3981	0.398100
516-260408-10	SELF-TAPPING SCREW 2.6 X 8 P/T(HARDEN) CAB. MTG.		PC	0	2.00000	0.0017	0.003400
773-036863-00	BATTERY CONTACT PLATE (A) +-VE		PC	0	1.00000	0.0363	0.036300
773-036864-00	BATTERY CONTACT PLATE +VE		PC	0	1.00000	0.0173	0.017300
774-036862-00	BATTERY CONTACT SPRING -VE		PC	0	1.00000	0.0260	0.026000
810-041004-13	POLYBAG 4" X 10" X 0.04MM FOR HANDSET	W/RE-CYCLING MARK	PC	0	1.00000	0.0062	0.006200
849-892002-00	CONTACT RUBBER KEY PAD (34 KEYS)		PC	0	1.00000	0.5008	0.500800
892-892002-12	DIAL KEY PLATE - TEAC DESIGN (RC-551)		PC	0	1.00000	0.1981	0.198100
900-892010-01	HANDSET TOP CABINET - BLACK MOULDED		PC	0	1.00000	0.1938	0.193800
902-892010-01	HANDSET BOTTOM CABINET - BLACKMOULDED		PC	0	1.00000	0.1654	0.165400
910-892001-01	BATTERY DOOR		PC	0	1.00000	0.0458	0.045800
964-892001-00	SENSOR LENS		PC	0	1.00000	0.0438	0.043800

ASSEMB PRICE : 2.949900

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 3      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
*** ASSEMBLY : 180-8813T0-24-03 NON-COM PART ASS'Y PAL/BG W/SCART/1P.TXT						
002-114022-40	14" CRT #37SX110Y22-DC05A S/H CAI HONG	PC	0	1.00000	81.9712	81.971200
003-131424-02	TUNER OSCAR UVE33-W24/R16-3649MITSUMI UV201	PC	0	1.00000	10.2837	10.283700
008-550151-05	DEGAUSSING COIL 40T (W/FIVE LAYERS OF TAPE) L601	PC	0	1.00000	0.8462	0.846200
113-561105-17	CARBON FILM RESISTOR 560 OHM 1/4W +-5% R134,135,136	PC	0	3.00000	0.0028	0.008400
123-222466-41	CERAMIC CAP. 0.0022 MFD 400V +-20% ECK-DNS222MEX MATSUSHITA C512,523	PC	0	2.00000	0.1654	0.330800
133-100322-33	PHILIPS IC PCA CTV322S U101	PC	0	1.00000	4.0188	4.018800
162-110010-00	ANTENNA MATCHING TRANSFORMER (300 OHM TO 75 OHM)	PC	0	1.00000	0.1788	0.178800
166-162030-00	SPEAKER 3" 2W 16 OHM "TCL"	PC	0	1.00000	0.6154	0.615400
171-550084-02	84" AC LINE CORD (END-CUT)SAA APPW/7.5A PLUG.	PC	0	1.00000	0.6154	0.615400
172-726000-99	BARE WIRE 54MM J088,090,093,095,097-098,103-104,084,085,W123	M	0	0.48600	0.0092	0.004471
186-227503-14	BATTERY 3A	PC	0	2.00000	0.0635	0.127000
191-400042-07	4 PINS SOCKET ASS'Y AWG 20 420MM	PC	0	1.00000	0.1719	0.171900
610-881301-0X	GIFT BOX - TEAC DESIGN	PC	0	1.00000	1.7617	1.761700
663-230512-95	SERIAL NO.LABEL - OC:GT-512/95	PC	0	0.00000	0.0077	0.000000
663-230542-95	SERIAL NO.LABEL - OC:GT-542/95	PC	0	2.00000	0.0077	0.015400
	1 PC STUCK ON CTN, 1 PC STUCK ON RATING LABEL					
669-881301-09	RATING LABEL - TEAC DESIGN	PC	0	1.00000	0.0481	0.048100
670-881300-0J	INSTRUCTION MANUAL - TEAC DESIGN {40 PROG}	PC	0	1.00000	0.0769	0.076900
678-881303-06	TOTAL CARE STICKER - TEAC DESIGN (BLK & WHITE)	PC	0	1.00000	0.0192	0.019200
678-881304-02	SCREEN STICKER - TEAC DESIGN ATTACH TO TOP RIGHT OF SCREEN	PC	0	1.00000	0.2692	0.269200
678-922109-01	EASY TUNE CARD - TEAC DESIGN	PC	0	1.00000	0.0788	0.078800
690-922139-01	WARRANTY CARD- TEAC (A) DESIGN	PC	0	1.00000	0.0577	0.057700
693-881300-21	EAN CODE LABEL - 9313060006525	PC	0	1.00000	0.0077	0.007700
782-721952-04	DOUBLE ROD ANTENNA 520MM	PC	0	1.00000	1.5192	1.519200
810-303004-14	POLYBAG 30"X30"X0.04MM W/PUNCHHOLE/RE-CYCLING MARK(P/O MAT.) FOR UNIT	PC	0	1.00000	0.1202	0.120200
826-221505-00	FOAM SHEET 22" X 15" X 0.5MM FOR UNIT	PC	0	2.00000	0.0673	0.134600
884-881304-01	JACK COVER PLATE - TEAC DESIGN	PC	0	1.00000	0.0346	0.034600
884-881321-01	PRESET PLATE - BLACK W/L.GREY S.S. ENG STD (4 KEY HOLES)	PC	0	1.00000	0.0827	0.082700
887-881302-01	COVER PLATE (L) - BLANK	PC	0	1.00000	0.0423	0.042300
900-881303-02	FRONT CABINET - MATT BLACK SPY(NEW MOULDED)	PC	0	1.00000	3.2196	3.219600
902-881305-U1	REAR CABINET - MOULDED BLACK SPRAY (UL)	PC	0	1.00000	2.6244	2.624400
917-881302-02	REMOTE LENS - RED W/ GOLD SS. ENG STD (B)	PC	0	1.00000	0.1202	0.120200
919-881301-74	PRESET DOOR - TEAC (A) DESIGN (W/CABLE READY WORDING)	PC	0	1.00000	0.1363	0.136300
973-881304-01	VOLUME / CHANNEL KNOB SET - BLACK MOULDED (B)	PC	0	1.00000	0.0458	0.045800
986-931301-06	NAME PLATE - TEAC DESIGN	PC	0	1.00000	0.0192	0.019200
991-881301-01	POWER KNOB - BLACK MOULDED	PC	0	1.00000	0.0196	0.019600

ASSB PRICE : 109.625471

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96  
Page Number : 4

PRODUCT CODE : 8813T0-240003-TV  
DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
*** ASSEMBLY : 180-8813T0-24-CP COMMON PART ASS'Y PAL/BG W/SCART/1P.TXT						
001-214189-05	FLYBACK TRANSFORMER 154-189H GOLDSTAR "FOR CAIHONG CRT" T402	PC	0	1.00000	6.3341	6.334100
012-102330-06	SEMI-FIXED RESISTOR EVND2AA 03B13 1KB VR601,602	PC	0	2.00000	0.0558	0.111600
012-102340-06	SEMI-FIXED RESISTOR EVND8AA 03B13 1KB VR402,501	PC	0	2.00000	0.0500	0.100000
012-103340-06	SEMI-FIXED RESISTOR EVND8AA 03B14 10KB VR202	PC	0	1.00000	0.0500	0.050000
012-502330-06	SEMI-FIXED RESISTOR EVND2AA 03B53 5KB VR603,604,605	PC	0	3.00000	0.0558	0.167400
012-502340-06	SEMI-FIXED RESISTOR EVND8AA 03B53 5KB VR201	PC	0	1.00000	0.0500	0.050000
012-503340-06	SEMI-FIXED RESISTOR EVND8AA 03B54 50KB VR101	PC	0	1.00000	0.0500	0.050000
101-190710-96	HORIZONTAL DRIVE TRANSFORMER R0710 T401	PC	0	1.00000	0.2500	0.250000
101-288820-95	LINE FILTER 70MH T501	PC	0	1.00000	0.7308	0.730800
101-414025-94	SWITCHING POWER TRANSFORMER (HL4025B) T502	PC	0	1.00000	2.0192	2.019200
102-370600-02	TANK COIL / AFC COIL COILS L204 707851	PC	0	1.00000	0.1000	0.100000
105-100101-02	FIXED INDUCTIVE COIL 10UH +-10% L102,205	PC	0	2.00000	0.0459	0.091800
105-109101-02	FIXED INDUTIVE COIL 1.0 UH 10% L201,202,208,209	PC	0	4.00000	0.0459	0.183600
105-121101-02	FIXED INDUCTIVE COIL 120UH +-10% L601	PC	0	1.00000	0.0745	0.074500
105-201106-02	CHOKE COIL 200UH 10% CH9012-201K (ELEC PRODUCT) L502	PC	0	1.00000	0.1639	0.163900
105-399101-02	FIXED INDUCTIVE COIL 3.9 UH 10% L901	PC	0	1.00000	0.0459	0.045900
105-650052-01	LINEARITY COIL 34UH FOR 21" CRT L401	PC	0	1.00000	0.3428	0.342800
105-689101-02	FIXED INDUCTIVE COIL 6.8UH 10% L203	PC	0	1.00000	0.0459	0.045900
107-105500-66	SOUND TRAP CERAMIC FILTER 5.5MHZ TPS-5.5MB MURATA CF201	PC	0	1.00000	0.1465	0.146500
107-305500-16	SOUND BYPASS CERAMIC FILTER 5.5MHZ SFE-5.5MB MURATA CF204	PC	0	1.00000	0.1465	0.146500
107-738916-00	SAW FILTER TSF-5316 SANYO SAW201A	PC	0	1.00000	1.2188	1.218800
113-100105-17	CARBON FILM RESISTOR 10 OHM 1/4W +-5% R209	PC	0	1.00000	0.0032	0.003200
113-101105-17	CARBON FILM RESISTOR 100 OHM 1/4W +-5% R137,160,161,208,229,230,231,240,131,911,147,148	PC	0	12.00000	0.0028	0.033600
113-101105-17	CARBON FILM RESISTOR 100 OHM 1/4W +-5% R903	PC	0	1.00000	0.0028	0.002800

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 5      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
113-102105-17	CARBON FILM RESISTOR 1K OHM 1/4W +-5% R106,138,139,157,216,221,225,233,275,905,256,207	PC	0	12.00000	0.0028	0.033600
113-102105-17	CARBON FILM RESISTOR 1K OHM 1/4W +-5% R252,253,254,255,281,251	PC	0	6.00000	0.0028	0.016800
113-102305-75	METAL OXIDE FILM RESISTOR 1K OHM 1W +-5% R432	PC	0	1.00000	0.0187	0.018700
113-103101-67	METAL FILM RESISTOR 10K OHM 1/4W +-1% R101,102	PC	0	2.00000	0.0106	0.021200
113-103105-17	CARBON FILM RESISTOR 10K OHM 1/4W +-5% R103,105,140,201,415,249,165,627,914	PC	0	9.00000	0.0028	0.025200
113-103105-17	CARBON FILM RESISTOR 10K OHM 1/4W +-5% R424,425,508,528,154,141	PC	0	6.00000	0.0028	0.016800
113-103205-12	CARBON FILM RESISTOR 10K OHM 1/2 +-5% R411	PC	0	1.00000	0.0062	0.006200
113-103405-75	METAL OXIDE FILM RESISTOR 10K OHM 2W +-5% R526	PC	0	1.00000	0.0240	0.024000
113-104105-17	CARBON FILM RESISTOR 100K OHM 1/4W +-5% R107,108,119,239,243,244,417	PC	0	7.00000	0.0028	0.019600
113-104205-12	CARBON FILM RESISTOR 100K OHM 1/2W +-5% R521	PC	0	1.00000	0.0062	0.006200
113-104305-75	METAL OXIDE FILM RESISTOR 100KOHM 1W +-5% R531	PC	0	1.00000	0.0187	0.018700
113-105101-67	METAL FILM RESISTOR 1M OHM 1/4W +-1% R246	PC	0	1.00000	0.0115	0.011500
113-120305-75	METAL OXIDE FILM RESISTOR 12 OHM 1W +-5% R512	PC	0	1.00000	0.0187	0.018700
113-120405-75	METAL OXIDE FILM RESISTOR 12 OHM 2W +-5% R519	PC	0	1.00000	0.0240	0.024000
113-121105-17	CARBON FILM RESISTOR 120 OHM 1/4W +-5% R262	PC	0	1.00000	0.0028	0.002800
113-122105-17	CARBON FILM RESISTOR 1.2K OHM 1/4W +-5% R206,248,617,162	PC	0	4.00000	0.0028	0.011200
113-123105-17	CARBON FILM RESISTOR 12K OHM 1/4W +-5% R210	PC	0	1.00000	0.0028	0.002800
113-151105-17	CARBON FILM RESISTOR 150 OHM 1/4W +-5% R223	PC	0	1.00000	0.0028	0.002800
113-151205-12	CARBON FILM RESISTOR 150 OHM 1/2W +-5% R421	PC	0	1.00000	0.0052	0.005200
113-152105-17	CARBON FILM RESISTOR 1.5K OHM 1/4W +-5% R622,621,250	PC	0	3.00000	0.0028	0.008400
113-152205-12	CARBON FILM RESISTOR 1K5 OHM 1/2W +-5% R610,611,612	PC	0	3.00000	0.0062	0.018600
113-153105-17	CARBON FILM RESISTOR 15K OHM 1/4W +-5% R245,402	PC	0	2.00000	0.0028	0.005600
113-153405-75	METAL OXIDE FILM RESISTOR 15K OHM 2W +-5% R604,605,606	PC	0	3.00000	0.0240	0.072000
113-159405-42	NON-FLAMMABLE FUSE RESISTOR 1.5 OHM 2W +-5% R620	PC	0	1.00000	0.0952	0.095200
113-180105-17	CARBON FILM RESISTOR 18 OHM 1/4 +- 5% R26A	PC	0	1.00000	0.0029	0.002900

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96  
Page Number : 6

PRODUCT CODE : 8813T0-240003-TV  
DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
113-181105-17	CARBON FILM RESISTOR 180 OHM 1/4W +-5% R222	PC	0	1.00000	0.0028	0.002800
113-182105-17	CARBON FILM RESISTOR 1.8K OHM 1/4W +-5% R506,602,274	PC	0	3.00000	0.0028	0.008400
113-183105-17	CARBON FILM RESISTOR 18K OHM 1/4W +-5% R418,721	PC	0	2.00000	0.0028	0.005600
113-184105-17	CARBON FILM RESISTOR 180K OHM 1/4W +-5% R120	PC	0	1.00000	0.0028	0.002800
113-221105-17	CARBON FILM RESISTOR 220 OHM 1/4W +-5% R142,238,213,908,909,910	PC	0	6.00000	0.0028	0.016800
113-221305-75	METAL OXIDE FILM RESISTOR 220 OHM 1W +-5% R419	PC	0	1.00000	0.0187	0.018700
113-222105-17	CARBON FILM RESISTOR 2.2K OHM 1/4W +-5% R130,224,272,151	PC	0	4.00000	0.0028	0.011200
113-222205-12	CARBON FILM RESISTOR 2.2K OHM 1/2W +-5% R715	PC	0	1.00000	0.0062	0.006200
113-223101-67	METAL FILM RESISTOR 22K OHM 1/4W +-1% R412,111	PC	0	2.00000	0.0106	0.021200
113-223105-17	CARBON FILM RESISTOR 22K OHM 1/4W +-5% R109,110,114,143,144,146,158,124,150,525,713,912	PC	0	12.00000	0.0028	0.033600
113-223105-17	CARBON FILM RESISTOR 22K OHM 1/4W +-5% R722,232	PC	0	2.00000	0.0028	0.005600
113-224105-17	CARBON FILM RESISTOR 220K OHM 1/4W +-5% R719,155	PC	0	2.00000	0.0028	0.005600
113-229205-12	CARBON FILM RESISTOR 2.2 OHM 1/2W +-5% R279	PC	0	1.00000	0.0062	0.006200
113-229305-75	METAL OXIDE FILM RESISTOR 2.2 OHM 1W +-5% R426	PC	0	1.00000	0.0187	0.018700
113-229405-75	METAL OXIDE FILM RESISTOR 2.2 OHM 2W +-5% R503,427	PC	0	2.00000	0.0240	0.048000
113-270405-75	METAL OXIDE FILM RESISTOR 27 OHM 2W +-5% R513	PC	0	1.00000	0.0240	0.024000
113-272105-17	CARBON FILM RESISTOR 2.7K OHM 1/4W +-5% R618,613,614,615,616	PC	0	5.00000	0.0028	0.014000
113-272205-12	CARBON FILM RESISTOR 2.7K OHM 1/2W +-5% R403,520	PC	0	2.00000	0.0062	0.012400
113-273105-17	CARBON FILM RESISTOR 27K OHM 1/4W +-5% R211,241,902	PC	0	3.00000	0.0028	0.008400
113-274205-12	CARBON FILM RESISTOR 270K OHM 1/2W +-5% R410	PC	0	1.00000	0.0062	0.006200
113-331105-17	CARBON FILM RESISTOR 330 OHM 1/4W +-5% R509	PC	0	1.00000	0.0028	0.002800
113-332102-17	CARBON FILM RESISTOR 3.3K OHM 1/4W +-2% R505	PC	0	1.00000	0.0044	0.004400
113-332105-17	CARBON FILM RESISTOR 3.3K OHM 1/4W +-5% R152,153,235,269,266,901	PC	0	6.00000	0.0028	0.016800
113-332605-75	METAL OXIDE FILM RESISTOR 3K3 OHM 5W +-5% R406	PC	0	1.00000	0.1154	0.115400
113-333105-17	CARBON FILM RESISTOR 33K OHM 1/4W +-5% R416,125	PC	0	2.00000	0.0028	0.005600



\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96  
Page Number : 7

PRODUCT CODE : 8813T0-240003-TV  
DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
113-334305-75	METAL OXIDE FILM RESISTOR 330KOHM 1W +-5% R514	PC	0	1.00000	0.0187	0.018700
113-338405-75	METAL OXIDE FILM RESISTOR 0.330OHM 2W +-5% R516	PC	0	1.00000	0.0240	0.024000
113-339105-17	CARBON FILM RESISTOR 3.3 OHM 1/4W +- 5% R720	PC	0	1.00000	0.0028	0.002800
113-339405-42	NON-FLAMMABLE FUSE RESISTOR 3.3 OHM 2W +-5% R716	PC	0	1.00000	0.0846	0.084600
113-390605-75	METAL OXIDE FILM RESISTOR 39 OHM 5W +-5% R517	PC	0	1.00000	0.1154	0.115400
113-391105-17	CARBON FILM RESISTOR 390 OHM 1/4W +-5% R607,608,609,112	PC	0	4.00000	0.0028	0.011200
113-391305-75	METAL OXIDE FILM RESISTOR 390 1W +-5% R270	PC	0	1.00000	0.0202	0.020200
113-392105-17	CARBON FILM RESISTOR 3.9K OHM 1/4W +-5% R414	PC	0	1.00000	0.0028	0.002800
113-470105-17	CARBON FILM RESISTOR 47 OHM 1/4W +-5% R220,204	PC	0	2.00000	0.0028	0.005600
113-470205-12	CARBON FILM RESISTOR 47 OHM 1/2W +-5% R405	PC	0	1.00000	0.0058	0.005800
113-470405-75	METAL OXIDE FILM RESISTOR 47 OHM 2W +-5% R530	PC	0	1.00000	0.0240	0.024000
113-471105-17	CARBON FILM RESISTOR 470 OHM 1/4W +-5% R601	PC	0	1.00000	0.0028	0.002800
113-472105-17	CARBON FILM RESISTOR 4.7K OHM 1/4W +-5% R228,205,267,247,422,511,906,907,115	PC	0	9.00000	0.0028	0.025200
113-473105-17	CARBON FILM RESISTOR 47K OHM 1/4W +-5% R202,203,159,149,277,626	PC	0	6.00000	0.0028	0.016800
113-479605-51	WIRE WOUND CEMENT RES. 4.7 OHM5W +-5% R502	PC	0	1.00000	0.1808	0.180800
113-512105-17	CARBON FILM RESISTOR 5.1K OHM 1/4W +-5% R276	PC	0	1.00000	0.0028	0.002800
113-560105-17	CARBON FILM RESISTOR 56 OHM 1/4W +-5% R260	PC	0	1.00000	0.0028	0.002800
113-561105-17	CARBON FILM RESISTOR 560 OHM 1/4W +-5% R298,299	PC	0	2.00000	0.0028	0.005600
113-562105-17	CARBON FILM RESISTOR 5.6K OHM 1/4W +-5% R723,724	PC	0	2.00000	0.0028	0.005600
113-565205-92	CARBON COMPOSITION RESISTOR 5.6M 1/2W +-5% R523,524	PC	0	2.00000	0.0635	0.127000
113-681105-17	CARBON FILM RESISTOR 680 OHM 1/4W +-5% R156	PC	0	1.00000	0.0028	0.002800
113-682102-17	CARBON FILM RESISTOR 6.8K OHM 1/4W +-2% R504	PC	0	1.00000	0.0048	0.004800
113-682105-17	CARBON FILM RESISTOR 6.8K OHM 1/4W +-5% R510,227,280,712	PC	0	4.00000	0.0028	0.011200
113-688205-42	FUSING RESISTOR 0.68 OHM 1/2W +-5% R518	PC	0	1.00000	0.0452	0.045200
113-688305-42	FUSING RESISTOR 0.68 OHM 1W +-5% R529,408,409	PC	0	3.00000	0.0577	0.173100

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96  
Page Number : 8

PRODUCT CODE : 8813T0-240003-TV  
DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
113-750105-17	CARBON FILM RESISTOR 75 OHM 1/4W +-5% R257,258,259,261,226	PC	0	5.00000	0.0028	0.014000
113-821105-17	CARBON FILM RESISTOR 820 OHM 1/4W +-5% R212	PC	0	1.00000	0.0028	0.002800
113-822105-17	CARBON FILM RESISTOR 8.2K OHM 1/4W +-5% R507,113,123,273	PC	0	4.00000	0.0028	0.011200
113-823105-17	CARBON FILM RESISTOR 82K OHM 1/4W +-5% R237	PC	0	1.00000	0.0028	0.002800
113-824105-17	CARBON FILM RESISTOR 820K OHM 1/4W +-5% R242,264	PC	0	2.00000	0.0028	0.005600
114-210200-01	THERMISTOR (NICHICON ZPB53 BL 200C) R501	PC	0	1.00000	0.4558	0.455800
123-100340-93	CERAMIC CAP. 10 PF 50V +-5% (NPO) C902	PC	0	1.00000	0.0145	0.014500
123-101350-60	CERAMIC CAP. 100 PF 50V +-10% (SL TYPE) C116,117,118,119,121	PC	0	5.00000	0.0116	0.058000
123-102350-90	CERAMIC CAP. 0.001 MFD 50V +-10% (B TYPE) C207,215,210,235,236,417,401,904	PC	0	8.00000	0.0127	0.101600
123-102850-10	CERAMIC CAP. 0.001 MFD 2KV +-10% MATSUSHITA C604,405	PC	0	2.00000	0.1096	0.219200
123-103370-90	CERAMIC CAP. 0.01 MFD 50V +80 -20% C120,208,209,125,757	PC	0	5.00000	0.0128	0.064000
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C110,111,112,127,226,227,228,231,244,242,748	PC	0	11.00000	0.0388	0.426800
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C245,246,258,263,427,429,430,519,520,734,750	PC	0	11.00000	0.0388	0.426800
123-104270-90	CERAMIC CAP. 0.1 MFD 25V +80 -20% C901,905,906,907,908,910	PC	0	6.00000	0.0388	0.232800
123-150340-93	CERAMIC CAP. 15 PF 50V +-5% (NPO) C214,249,903	PC	0	3.00000	0.0145	0.043500
123-152850-10	CERAMIC CAP. 0.0015 MFD 2KV +-10% MATSUSHITA C433	PC	0	1.00000	0.1365	0.136500
123-221350-60	CERAMIC CAP. 220 PF 50V +-10% (SL TYPE) C601,602,603	PC	0	3.00000	0.0137	0.041100
123-221551-90	CERAMIC CAP. 220 PF 500V +-10% MATSUSHITA C513	PC	0	1.00000	0.0375	0.037500
123-222350-90	CERAMIC CAP. 0.0022 MFD 50V +-10% (B TYPE) C128	PC	0	1.00000	0.0140	0.014000
123-223370-90	CERAMIC CAP. 0.022 MFD 50V +80-20% C211,261,234,237,250,256,232,243	PC	0	8.00000	0.0128	0.102400
123-270340-93	CERAMIC CAP. 27PF 50V +-5% (NPO) C122,123	PC	0	2.00000	0.0149	0.029800
123-471350-60	CERAMIC CAP. 470 PF 50V +-10% (SL TYPE) C758,759	PC	0	2.00000	0.0201	0.040200
123-472550-90	CERAMIC CAP. 0.0047 MFD 500V +-10% (B TYPE) C410,411,515	PC	0	3.00000	0.1192	0.357600
123-472552-90	CERAMIC CAP. 0.0047 MFD 500V +-10% (B TYPE) SMALL SIZE C503,504,505	PC	0	3.00000	0.0551	0.165300
123-680340-93	CERAMIC CAP. 68 PF 50V +-5% (NPO) C217	PC	0	1.00000	0.0179	0.017900

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 9      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
123-681350-90	CERAMIC CAP. 680 PF 50V +-10% (B TYPE) C423	PC	0	1.00000	0.0127	0.012700
123-821850-10	CERAMIC CAP. 820 PF 2KV +-10% (SL TYPE) MATSUSHITA C516	PC	0	1.00000	0.0942	0.094200
126-104071-01	MYLAR CAP. 0.1 MFD 50V +-10% C218,416,418,510,101,255	PC	0	6.00000	0.0294	0.176400
126-104101-31	POLYPROPYLENE CAP. 0.1 MFD 100V +-10% C412	PC	0	1.00000	0.1160	0.116000
126-222071-01	MYLAR CAP. 0.0022 MFD 50V +-10% C114,754,251	PC	0	3.00000	0.0129	0.038700
126-222161-41	METALIZED POLYPROPYLENE CAP. 0.0022 MFD 1600V +-10% C440,402,511	PC	0	3.00000	0.2270	0.681000
126-223071-01	MYLAR CAP. 0.022 MFD 50V +-10% C220,909	PC	0	2.00000	0.0165	0.033000
126-224071-01	MYLAR CAP 0.22 MFD 50V +-10% C102,201,752	PC	0	3.00000	0.0481	0.144300
126-332161-41	METALIZED POLYPROPYLENE CAP. 0.0033 MFD 1600V +-10% C404	PC	0	1.00000	0.2270	0.227000
126-333071-01	MYLAR CAP. 0.033 MFD 50V +-10% C507	PC	0	1.00000	0.0177	0.017700
126-392071-01	MYLAR CAP. 0.0039 MFD 50V +-10% C213	PC	0	1.00000	0.0129	0.012900
126-472071-01	MYLAR CAP. 0.0047 MFD 50V +-10% C247,253,254,736,421,422	PC	0	6.00000	0.0129	0.077400
126-473071-01	MYLAR CAP. 0.047 MFD 50V +-10% C223,224	PC	0	2.00000	0.0237	0.047400
126-473201-31	POLYPROPYLENE CAP. 0.047 MFD 200V +-10% C403,441	PC	0	2.00000	0.0796	0.159200
126-473211-41	METALLIZED POLYPROPYLENE CAP 0.047 MFD 250V +-10% VDE C502,501	PC	0	2.00000	0.1565	0.313000
126-474071-01	MYLAR CAP. 0.47 MFD 50V +-10% C222	PC	0	1.00000	0.0756	0.075600
126-474201-31	POLYPROPYLENE CAP 0.47 MFD 200V +-10% C413	PC	0	1.00000	0.2622	0.262200
127-105071-05	ELECT CAP. 1 MFD 50V +-10% (TIME CONSTANT) C419	PC	0	1.00000	0.0587	0.058700
127-105072-03	ELECT. CAP. 1 MFD 50V +-20% C202,203,204,225,230,252,749,426,518	PC	0	9.00000	0.0240	0.216000
127-105132-03	ELECT. CAP. 1 MFD 160V +-20% C414	PC	0	1.00000	0.0490	0.049000
127-106042-03	ELECT. CAP. 10 MFD 16V +-20% C104,105,273,219,229,260,124,264	PC	0	8.00000	0.0240	0.192000
127-106072-03	ELECT. CAP. 10 MFD 50V +-20% C509	PC	0	1.00000	0.0269	0.026900
127-106252-03	ELECT. CAP. 10 MFD 250V +-20% C407	PC	0	1.00000	0.1385	0.138500
127-107042-03	ELECT. CAP. 100 MFD 16V +-20% C431,432,521,428,605	PC	0	5.00000	0.0346	0.173000
127-107062-03	ELECT. CAP. 100 MFD 35V +-20% C425	PC	0	1.00000	0.0519	0.051900

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96                      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 10                              DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
127-107132-03	ELECT. CAP. 100 MFD 160V +-20%"NICHICON" C408,517	PC	0	2.00000	0.3308	0.661600
127-107402-03	ELECT. CAP. 100 MFD 400V +-20% C506	PC	0	1.00000	1.0673	1.067300
127-108052-03	ELECT. CAP. 1000 MFD 25V +-20% C406,733	PC	0	2.00000	0.1442	0.288400
127-225042-23	ELECT. CAP. BIPOLAR 2.2MFD 16V+-20% C216	PC	0	1.00000	0.0654	0.065400
127-225072-03	ELECT. CAP 2.2 MFD 50V +-20% C205,126,259,262,257	PC	0	5.00000	0.0240	0.120000
127-226042-03	ELECT. CAP. 22 MFD 16V +-20% C109,753	PC	0	2.00000	0.0240	0.048000
127-227042-03	ELECT. CAP. 220 MFD 16V +-20% C221	PC	0	1.00000	0.0558	0.055800
127-227062-03	ELECT. CAP. 220 MFD 35V +-20% C424,514	PC	0	2.00000	0.0712	0.142400
127-228052-03	ELECT. CAP. 2200 MFD 25V +-20% C420	PC	0	1.00000	0.3192	0.319200
127-476042-03	ELECT. CAP. 47 MFD 16V +-20% C206,233,265,266,267,212,911	PC	0	7.00000	0.0288	0.201600
127-476072-07	ELECT.CAP. 47 MFD 50V +-20%    NICHICON C508	PC	0	1.00000	0.0404	0.040400
127-476072-07	ELECT.CAP. 47 MFD 50V +-20%    NICHICON C745	PC	0	1.00000	0.0404	0.040400
127-477062-03	ELECT CAP. 470 MFD 35V +-20% C434,751	PC	0	2.00000	0.1192	0.238400
130-134148-01	SILICON DIODE IN4148 D101,102,105,111,112,113,116,208,210,408,217,114	PC	0	12.00000	0.0099	0.118800
130-134148-01	SILICON DIODE IN4148 D103,117,118,119,209,121,605,606,607,129	PC	0	10.00000	0.0099	0.099000
130-310012-50	DIODE BAX12A D407	PC	0	1.00000	0.0448	0.044800
130-310033-50	DIODE BYD33D D403,404,405,510	PC	0	4.00000	0.0587	0.234800
130-310062-50	DIODE BAW 62 D203,204,205,206,401,402	PC	0	6.00000	0.0209	0.125400
130-310095-50	DIODE BYW95B D511	PC	0	1.00000	0.1727	0.172700
130-310133-50	DIODE BYD33J D406,507,508,509	PC	0	4.00000	0.0721	0.288400
130-311441-64	BRIDGE RECTIFIER 1J4B41            TOSHIBA D501	PC	0	1.00000	0.4024	0.402400
130-410039-01	ZENER DIODE 3.9V D211	PC	0	1.00000	0.0246	0.024600
130-410051-01	ZENER DIODE 5.1V 1/2W +-5% D212	PC	0	1.00000	0.0246	0.024600
130-410075-01	ZENER DIODE 7.5V 1/2W D213	PC	0	1.00000	0.0246	0.024600
130-410082-01	ZENER DIODE 8.2V D505	PC	0	1.00000	0.0246	0.024600

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 11      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
130-410120-02	ZENER DIODE 12V HZ12A2 D608	PC	0	1.00000	0.0246	0.024600
130-410574-00	ZENER DIODE UPC 574J NEC OR KA33V SAMSUNG U502	PC	0	1.00000	0.1577	0.157700
130-411091-01	ZENER DIODE 9.1V D506	PC	0	1.00000	0.0246	0.024600
130-512044-00	LED 3MM RED 204HDC FOR LED 601	PC	0	1.00000	0.0285	0.028500
131-111402-03	TRANSISTOR ED1402C Q102,103,104,105,202,208,207,211,210,209,606	PC	0	11.00000	0.0337	0.370700
131-111602-03	TRANSISTOR ED1602C (PHILIPS) Q106,107,108	PC	0	3.00000	0.0333	0.099900
131-170547-02	TRANSISTOR BC 547B PHILIPS Q501,503	PC	0	2.00000	0.0313	0.062600
131-170548-02	TRANSISTOR BC 548B PHILIPS. Q204,205,901	PC	0	3.00000	0.0323	0.096900
131-170557-02	TRANSISTOR BC 557B PHILIPS Q502	PC	0	1.00000	0.0269	0.026900
131-170558-02	TRANSISTOR BC 558B PHILIPS Q604	PC	0	1.00000	0.0323	0.032300
131-190370-00	TRANSISTOR BF 370 PHILIPS. Q201	PC	0	1.00000	0.0744	0.074400
131-190422-00	TRANSISTOR BF422 PHILIPS Q601,602,603	PC	0	3.00000	0.0760	0.228000
131-202508-62	TRANSISTOR BU 2508 DF PHILIPS Q402	PC	0	1.00000	1.0269	1.026900
131-232482-00	TRANSISTOR 2SC2482 TOSHIBA Q401	PC	0	1.00000	0.0969	0.096900
131-235287-01	TRANSISTOR 2SC5287 SANKEN Q504	PC	0	1.00000	0.7788	0.778800
131-265401-00	TRANSISTOR 2N 5401 PHILIPS Q506	PC	0	1.00000	0.0498	0.049800
131-265551-00	TRANSISTOR 2N 5551 PHILIPS Q505	PC	0	1.00000	0.0498	0.049800
131-370135-00	TANSISTOR BD 135 PHILIPS Q701	PC	0	1.00000	0.1215	0.121500
131-462369-00	TRANSISTOR PH2369 PHILIPS Q101	PC	0	1.00000	0.0537	0.053700
131-480011-00	TRANSISTOR BUT 11 PHILIPS Q507	PC	0	1.00000	0.4019	0.401900
133-102411-31	I.C. ST24C01B1 SGS U102	PC	0	1.00000	0.6260	0.626000
133-104661-33	I.C. TDA 4661 PHILIPS IC U202	PC	0	1.00000	1.6154	1.615400
133-115254-33	I.C. SAA5254P/T PHILIPS U901	PC	0	1.00000	7.0852	7.085200
133-118362-33	I.C. TDAB362 N4S7 PHILIPS U201	PC	0	1.00000	7.0702	7.070200
133-201013-33	I.C. TDA1013B PHILIPS U705	PC	0	1.00000	0.5962	0.596200

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 12      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA (MONO 40P.)

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
133-203653-33	I.C. TDA3653B PHILIPS U401	PC	0	1.00000	0.5658	0.565800
133-207805-31	I.C. L7805CV SGS U501	PC	0	1.00000	0.2683	0.268300
133-207808-31	IC L7808C-V SGS-THOMSON U405	PC	0	1.00000	0.2683	0.268300
133-207812-31	IC L7812CV SGS-THOMSON U402	PC	0	1.00000	0.2683	0.268300
133-304241-33	I.C. PC74HCT241P PHILIPS U902	PC	0	1.00000	0.3127	0.312700
133-404053-33	I.C. HEF4053BP PHILIPS U204	PC	0	1.00000	0.2500	0.250000
136-500002-00	REMOTE RECEIVER (HC-SZ02) IR101	PC	0	1.00000	1.0577	1.057700
137-100000-31	CRYSTAL 10 MHZ HOORAY X101	PC	0	1.00000	0.3269	0.326900
137-270000-30	CRYSTAL 27 MHZ NDK X901	PC	0	1.00000	0.4350	0.435000
137-443618-20	CRYSTAL 4.43 MHZ X201	PC	0	1.00000	0.4615	0.461500
146-100001-14	POWER SWITCH (ESB-99957S COST COST REDUCTION) SW501	PC	0	1.00000	1.3413	1.341300
146-100002-13	TACT SWITCH KSM0634A HDK S10,S15,S2,S22	PC	0	4.00000	0.0673	0.269200
146-104016-13	TACT SWITCH 31TM116A UNITRONIC S11,S12,S16,S17	PC	0	4.00000	0.0654	0.261600
160-101001-08	PIN CONNECTOR 1 PIN PLUG      STRAIGHT FOR CN601,501,502	PC	0	3.00000	0.0140	0.042000
160-102255-27	PIN CONNECTOR 2 PINS PLUG      STRAIGHT (UL) (S.H.S) CN701	PC	0	1.00000	0.0135	0.013500
160-102805-08	PIN CONNECTOR 2 PIN PLUG      STRAIGHT CN503	PC	0	1.00000	0.0338	0.033800
160-104805-08	PIN CONNECTOR 4 PIN PLUG      STRAIGHT CN401	PC	0	1.00000	0.0512	0.051200
160-105255-27	PIN CONNECTOR 5 PINS WAFER      2.5 PITCH CN201	PC	0	1.00000	0.0337	0.033700
161-540105-00	CRT SOCKET ISL-01 IN CHANG SK601	PC	0	1.00000	0.6154	0.615400
161-683702-22	21 PIN SOCKET SK201	PC	0	1.00000	0.3846	0.384600
172-620005-40	UL 1007 TOP COAT WIRE AWG 20      50MM BLACK 5 X 5MM U705 PIN `1' TO `9'	PC	0	1.00000	0.0036	0.003600
172-620012-40	UL 1007 TOP COAT WIRE AWG 20      120MM BLACK 10 X 10 MM MAIN P.C.B. `E1' TO `E2'	PC	0	1.00000	0.0077	0.007700
172-620036-40	UL 1007 TOP COAT WIRE AWG 20      360MM BLACK 10 X 10MM CN402 `2' TO CRT P.C.B. `GND'	PC	0	1.00000	0.0220	0.022000
172-626008-40	UL 1007 TOP COAT WIRE AWG 26      80MM BLACK 10 X 10 MM Q402 LUG TO PCB `K',Q504 LUG TO PCB `L'	PC	0	3.00000	0.0026	0.007800
172-626008-40	UL 1007 TOP COAT WIRE AWG 26      80MM BLACK 10 X 10 MM U401 LUG TO PCB `M'	PC	0	0.00000	0.0026	0.000000

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96      PRODUCT CODE : 8813T0-240003-TV  
 Page Number : 13      DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
172-626018-42	UL 1007 TOP COAT WIRE AWG 26 180MM RED 10 X 10 MM MAIN P.C.B. `W1' TO `W2'	PC	0	1.00000	0.0051	0.005100
172-626022-46	UL 1007 TOP COAT WIRE AWG 26 220MM BLUE 10 X 10 MM MAIN P.C.B. `R2' TO `R2'	PC	0	1.00000	0.0061	0.006100
172-626026-42	UL 1007 TOP COAT WIRE AWG 26 260MM RED MAIN P.C.B. `C1' TO `C3'	PC	0	1.00000	0.0071	0.007100
172-626030-42	UL 1007 TOP COAT WIRE AWG 26 300MM RED MAIN P.C.B. `O' TO `O'	PC	0	1.00000	0.0081	0.008100
172-626036-40	UL1007 TOP COAT WIRE AWG26 360MM BLACK 10 X 10MM FROM U401 PIN 8 TO CRT PCB `F'	PC	0	1.00000	0.0096	0.009600
172-626036-43	UL 1007 TOP COAT WIRE AWG 26 360MM ORANGE 10 X 10MM CN402 `1' TO CRT P.C.B. `F.F.'	PC	0	1.00000	0.0096	0.009600
172-626036-44	UL 1007 TOP COAT WIRE AWG 26 360MM YELLOW 10 X 10MM CN402 `3' TO CRT P.C.B. `180V'	PC	0	1.00000	0.0096	0.009600
172-726000-99	BARE WIRE 54MM J001-019,021,024-029,031,033-060,064-072,075-076	M	0	6.11000	0.0092	0.056212
172-726000-99	BARE WIRE 54MM J080,087,106,601,077,078,020,108,023,W122-123,R104	M	0	0.00000	0.0092	0.000000
172-830080-99	FLAT BRIDED WIRE 1200MM CRT GROUND	M	0	0.80000	0.1365	0.109200
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `1' TO CN203 `1',CN202 `2' TO CN203 `2'	PC	0	1.00000	0.0625	0.062500
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `3' TO CN203 `3',CN202 `4' TO CN203 `4'	PC	0	0.00000	0.0625	0.000000
177-655263-05	5 PIN FLAT CABLE WIRE CN202 `5' TO CN203 `5'	PC	0	0.00000	0.0625	0.000000
179-001010-00	OIL SLEEVING 1 MM DIA. 20MM FOR R26A,20MM FOR D511,20MM FOR BR501	M	0	0.12000	0.0001	0.000012
179-001010-00	OIL SLEEVING 1 MM DIA. 20MM FOR R516, 20MM FOR R406, 20MM FOR R411	M	0	0.00000	0.0001	0.000000
179-105000-00	UL PVC TUBE 5MM DIA L=80MM FOR AC LINE CORD	M	0	0.08000	0.1865	0.014920
179-105000-00	UL PVC TUBE 5MM DIA 260MM FOR CN201	M	0	0.26000	0.1865	0.048490
179-110500-00	UL PVC TUBE 11MM DIA. FOR AC LINE CORD	PC	0	0.05000	0.5500	0.027500
179-405030-00	5 MM DIA SHRINKABLE TUBE L=120MM, 60MM FOR AC LINE CORD,60MM FOR X,Y WIRE	M.	0	0.12000	0.4038	0.048456
182-222000-03	FUSE T2A 250V F501	PC	0	1.00000	0.1019	0.101900
190-881312-P1	MAIN P.C.B. (120196)	PC	0	1.00000	2.4577	2.457700
190-931302-P0	CRT P.C.B. (270195)	PC	0	1.00000	0.2500	0.250000
191-100034-09	1 PIN SOCKET ASSM'Y L=220MM CRT GND TO CN601	PC	0	1.00000	0.0348	0.034800
191-101003-07	1 PIN SOCKET ASSM'Y BLUE L=320MM MAIN P.C.B. `X1' TO CN502	PC	0	1.00000	0.0661	0.066100
191-101004-07	1 PIN SOCKET ASSM'Y RED L=320MM MAIN P.C.B. `Y1' TO CN501	PC	0	1.00000	0.0661	0.066100
191-200030-09	2 PIN SOCKET ASSM'Y L=300MM CN207 `1' TO SPK. `+', `2' TO SPK. `-'	PC	0	1.00000	0.0375	0.037500

\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96

PRODUCT CODE : 8813T0-240003-TV

Page Number : 14

DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA (MONO 40P.)

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `1' TO CRT PCB `A'	PC	0	1.00000	0.0995	0.099500
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `2' TO CRT PCB `B'	PC	0	0.00000	0.0995	0.000000
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `3' TO CRT PCB `C'	PC	0	0.00000	0.0995	0.000000
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `4' TO CRT PCB `D'	PC	0	0.00000	0.0995	0.000000
191-501002-07	5 PIN SOCKET ASSM'Y L=360MM CN201 `5' TO CRT PCB `E'	PC	0	0.00000	0.0995	0.000000
504-305006-10	MACHINE SCREW 3 X 6 B/M U402,405,501	PC	0	3.00000	0.0013	0.003900
504-305012-10	MACHINE SCREW 3 X 12 B/M FOR HEAT SINK (B)	PC	0	1.00000	0.0019	0.001900
514-400435-10	SELF-TAPPING SCREW 4 X 35 B/T (HARDEN) REAR CAB. TO FRONT CAB.	PC	0	2.00000	0.0117	0.023400
514-500435-10	SELF-TAPPING SCREW B/T 5 X 35 HEAD DIA. =8.5MM (MAX) (HARDEN) 2 FOR REAR CAB. TO FRONT CAB., 4 FOR CRT MTG.	PC	0	6.00000	0.0173	0.103800
516-260408-10	SELF-TAPPING SCREW 2.6 X 8 P/T (HARDEN) FOR VOLUME KNOB SET	PC	0	3.00000	0.0017	0.005100
517-303312-10	SELF-TAPPING SCREW 3 X 12 W/A W/H=7MM (HARDEN) FOR HEAT SINK (A) & (C)	PC	0	2.00000	0.0032	0.006400
520-305025-55	NUT M3 T=2.5 OD=5.5 FOR HEAT SINK (B)	PC	0	1.00000	0.0025	0.002500
580-101261-01	CABLE TIE L=100MM FOR CRT BOARD , CONNECTOR ,SPEAKER	PC	0	11.00000	0.0029	0.031900
622-882802-00	FELT L240 X W17 X TO.5MM W/TAPE FOR REAR CAB.	PC	0	4.00000	0.0654	0.261600
744-881301-00	SPRING FOR C.R.T. MOUNTING 5.2 X 42 X 0.6MM	PC	0	1.00000	0.0481	0.048100
746-063101-00	TEST PIN:TOTAL LENGTH 18.6MM THK:0.8MM MAIN P.C.B. `F',`G',`J'	PC	0	3.00000	0.0038	0.011400
746-063101-01	AC LINE CORD PIN FOR AC LINE CORD -2, (X), (Y) WIRE -2	PC	0	4.00000	0.0115	0.046000
750-063101-00	SOLDERING LUG LEG:8X4MM FOR U401,Q402,Q504	PC	0	3.00000	0.0023	0.006900
766-686801-00	FUSE HOLDER	PC	0	2.00000	0.0135	0.027000
777-881301-00	SPRING IN 10 X L12 FOR POWER KNOB	PC	0	1.00000	0.0077	0.007700
779-882001-01	IRON HEAT SINK (D) U402,405,501	PC	0	3.00000	0.0404	0.121200
781-882001-02	ALUMINIUM HEAT SINK (B) FOR Q402	PC	0	1.00000	0.2115	0.211500
781-882102-02	ALUMINIUM HEAT SINK (A) FOR Q504	PC	0	1.00000	0.3577	0.357700
781-892001-00	ALUMINIUM HEAT SINK (C) FOR U401	PC	0	1.00000	0.2385	0.238500
783-931304-02	SHIELD CAN	PC	0	1.00000	0.2173	0.217300
783-931305-02	SHIELD CAN COVER	PC	0	1.00000	0.1212	0.121200
800-881311-00	POLYFOAM (1)	PC	0	1.00000	0.2365	0.236500



\*\* THIS SPARE LIST IS MADE FOR TECHNICAL / MAINTENANCE REFERENCE ONLY \*\*

Print Date : 03/28/96  
Page Number : 15

PRODUCT CODE : 8813T0-240003-TV  
DESCRIPTION : 8813B TEAC PAL/BG W/SCART/1P. TXT M.BLK 240V SAA {MONO 40P.}

Component Part	Description / Location	Unit	Subs	Quantity Required	Unit Price	Amount
800-881312-00	POLYFOAM (2)	PC	0	1.00000	0.2365	0.236500
800-881313-00	POLYFOAM (3)	PC	0	1.00000	0.2365	0.236500
800-881314-00	POLYFOAM (4)	PC	0	1.00000	0.2365	0.236500
810-052204-14	POLYBAG 5" X 22" X 0.04MM FOR AC LINE CORD	PC	0	1.00000	0.0140	0.014000
810-091504-13	POLYBAG 9" X 15" X 0.04MM W/ FOR INSTRUCTION MANUAL	PC	0	1.00000	0.0163	0.016300
834-230801-00	RUBBER WASHER OD=23 , ID=8 , T=1.0 FOR CRT MTG.ADJUSTMENT	PC	0	4.00000	0.0183	0.073200
834-230802-00	RUBBER WASHER OD=23, ID=8, T=2 CRT MTG. DOWN	PC	0	2.00000	0.0231	0.046200
834-230805-00	RUBBER WASHER OD=23 ID=8 T=0.5 CRT MTG. UP	PC	0	2.00000	0.0110	0.022000
840-011024-21	PAD CORD L240 X W10 X T1 MM W/TAPE FOR BETWEEN CRT AND FRONT CAB.	PC	0	4.00000	0.0385	0.154000
840-051030-11	RUBBER PAD (ONE SIDE W/TAPE) MAIN P.C.B. (1 UNDER POWER TRANSFORMER T502) &	PC	0	2.00000	0.0073	0.014600
840-051030-11	RUBBER PAD (ONE SIDE W/TAPE) (1 BETWEEN HEAT SINK A.B. ON COPPER SIDE)	PC	0	0.00000	0.0073	0.000000
840-051520-11	RUBBER PAD (ONE SIDE W/TAPE) MAIN P.C.B. (UNDER FBT)	PC	0	1.00000	0.0063	0.006300
929-881301-00	LED HOLDER BKT FOR LED601	PC	0	1.00000	0.0152	0.015200
939-881302-00	POWER SWITCH ADAPTOR	PC	0	1.00000	0.0102	0.010200
948-881302-00	DEGAUSSING COIL MTG. CLIP	PC	0	4.00000	0.0269	0.107600
954-882803-00	HIGH VOLTAGE CABLE SPACER	PC	0	1.00000	0.0200	0.020000

ASSEMB PRICE : 60.522590

TOTAL PRICE : 173.0980

