

# NTMFD4C87N

## PowerPhase, Dual N-Channel SO8FL 30 V, High Side 20 A / Low Side 26 A

### Features

- Co-Packaged Power Stage Solution to Minimize Board Space
- Minimized Parasitic Inductances
- Optimized Devices to Reduce Power Losses
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- DC-DC Converters
- System Voltage Rails
- Point of Load

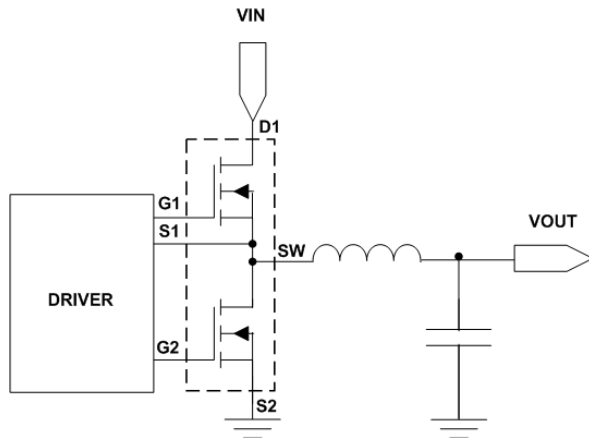


Figure 1. Typical Application Circuit

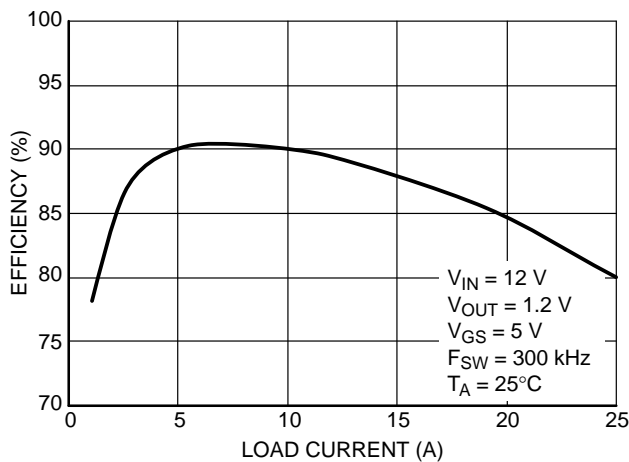



Figure 2. Typical Efficiency Performance  
POWERPHASEGEVB Evaluation Board




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

$V_{(BR)DSS}$	$R_{DS(ON) MAX}$	$I_D MAX$
Q1 Top FET 30 V	5.4 mΩ @ 10 V	20 A
	8.1 mΩ @ 4.5 V	
Q2 Bottom FET 30 V	3.1 mΩ @ 10 V	26 A
	4.3 mΩ @ 4.5 V	

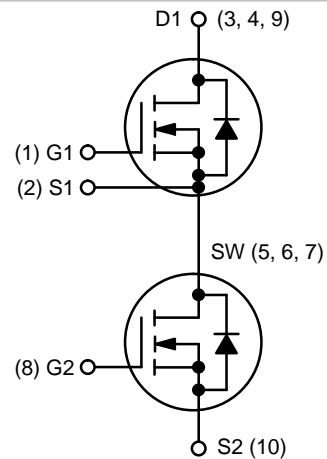


### PIN CONNECTIONS




(Bottom View)

### MARKING DIAGRAM



DFN8  
CASE 506CR



4C87N = Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
ZZ = Lot Traceability

### ORDERING INFORMATION

See detailed ordering and shipping information on page 10 of this data sheet.

# NTMFD4C87N

## MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise stated)

Parameter			Symbol	Value	Unit
Drain-to-Source Voltage	Q1	Q1	$V_{DSS}$	30	V
Drain-to-Source Voltage	Q2				
Gate-to-Source Voltage	Q1	Q1	$V_{GS}$	$\pm 20$	V
Gate-to-Source Voltage	Q2				
Continuous Drain Current $R_{\theta JA}$ (Note 1)	$T_A = 25^\circ\text{C}$	Q1	$I_D$	15.4	A
	$T_A = 85^\circ\text{C}$			11.1	
	$T_A = 25^\circ\text{C}$	Q2		19.5	
	$T_A = 85^\circ\text{C}$			14.1	
Power Dissipation $R_{\theta JA}$ (Note 1)	$T_A = 25^\circ\text{C}$	Q1	$P_D$	1.89	W
		Q2			
Continuous Drain Current $R_{\theta JA} \leq 10$ s (Note 1)	$T_A = 25^\circ\text{C}$	Q1	$I_D$	21.0	A
	$T_A = 85^\circ\text{C}$			15.1	
	$T_A = 25^\circ\text{C}$	Q2		26.6	
	$T_A = 85^\circ\text{C}$			19.2	
Power Dissipation $R_{\theta JA} \leq 10$ s (Note 1)	$T_A = 25^\circ\text{C}$	Q1	$P_D$	3.51	W
		Q2			
Continuous Drain Current $R_{\theta JA}$ (Note 2)	$T_A = 25^\circ\text{C}$	Q1	$I_D$	11.7	A
	$T_A = 85^\circ\text{C}$			8.5	
	$T_A = 25^\circ\text{C}$	Q2		14.9	
	$T_A = 85^\circ\text{C}$			10.7	
Power Dissipation $R_{\theta JA}$ (Note 2)	$T_A = 25^\circ\text{C}$	Q1	$P_D$	1.10	W
		Q2			
Pulsed Drain Current	$T_A = 25^\circ\text{C}$ $t_p = 10 \mu\text{s}$	Q1	$I_{DM}$	160	A
		Q2		260	
Operating Junction and Storage Temperature	Q1	$T_J, T_{STG}$		-55 to +150	$^\circ\text{C}$
	Q2				
Source Current (Body Diode)	Q1	$I_S$		10	A
	Q2			10	
Drain to Source DV/DT			$dV/dt$	6	V/ns
Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25^\circ\text{C}$ , $V_{DD} = 50$ V, $V_{GS} = 10$ V, $L = 0.1$ mH, $R_G = 25 \Omega$ )	$I_L = 20$ A <sub>pk</sub>	Q1	EAS	20	mJ
	$I_L = 30$ A <sub>pk</sub>	Q2	EAS	45	
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			$T_L$	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface-mounted on FR4 board using 1 sq-in pad, 2 oz Cu.
2. Surface-mounted on FR4 board using the minimum recommended pad size of 100 mm<sup>2</sup>.

# NTMFD4C87N

## THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Ambient – Steady State (Note 3)	$R_{\theta JA}$	66.0	°C/W
Junction-to-Ambient – Steady State (Note 4)	$R_{\theta JA}$	113.7	
Junction-to-Ambient – ( $t \leq 10$ s) (Note 3)	$R_{\theta JA}$	35.6	

3. Surface-mounted on FR4 board using 1 sq-in pad, 2 oz Cu.

4. Surface-mounted on FR4 board using the minimum recommended pad size of 100 mm<sup>2</sup>.

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	FET	Symbol	Test Condition	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>							
Drain-to-Source Break-down Voltage	Q1	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	30			V
	Q2			30			
Drain-to-Source Break-down Voltage Temperature Coefficient	Q1	$V_{(BR)DSS} / T_J$			15.8		mV / °C
	Q2				15.3		
Zero Gate Voltage Drain Current	Q1	$I_{DSS}$	$V_{GS} = 0\text{ V}, V_{DS} = 24\text{ V}$	$T_J = 25^\circ\text{C}$		1	$\mu\text{A}$
				$T_J = 125^\circ\text{C}$		10	
	Q2		$V_{GS} = 0\text{ V}, V_{DS} = 24\text{ V}$	$T_J = 25^\circ\text{C}$		1	
				$T_J = 125^\circ\text{C}$			
Gate-to-Source Leakage Current	Q1	$I_{GSS}$	$V_{GS} = 0\text{ V}, V_{DS} = \pm 20\text{ V}$			100	nA
	Q2					100	

## ON CHARACTERISTICS (Note 5)

Gate Threshold Voltage	Q1	$V_{GS(TH)}$	$V_{GS} = V_{DS}, I_D = 250\ \mu\text{A}$	1.3		2.2	V
	Q2			1.3		2.2	
Negative Threshold Temperature Coefficient	Q1	$V_{GS(TH)} / T_J$			5.0		mV / °C
	Q2				5.1		
Drain-to-Source On Resistance	Q1	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 30\text{ A}$		4.3	5.4	$\text{m}\Omega$
			$V_{GS} = 4.5\text{ V}, I_D = 18\text{ A}$		6.5	8.1	
	Q2		$V_{GS} = 10\text{ V}, I_D = 30\text{ A}$		2.5	3.1	
			$V_{GS} = 4.5\text{ V}, I_D = 30\text{ A}$		3.4	4.3	

## CAPACITANCES

Input Capacitance	Q1	$C_{ISS}$	$V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 15\text{ V}$		1252		$\text{pF}$
	Q2				1939		
Output Capacitance	Q1	$C_{OSS}$			610		$\text{pF}$
	Q2				1055		
Reverse Capacitance	Q1	$C_{RSS}$			129		$\text{pF}$
	Q2				49		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. Switching characteristics are independent of operating junction temperatures.

# NTMFD4C87N

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	FET	Symbol	Test Condition	Min	Typ	Max	Unit		
<b>CHARGES, CAPACITANCES &amp; GATE RESISTANCE</b>									
Total Gate Charge	Q1	$Q_{G(TOT)}$	$V_{GS} = 4.5\text{ V}, V_{DS} = 15\text{ V}; I_D = 30\text{ A}$		10.9		nC		
	Q2				13.8				
Threshold Gate Charge	Q1	$Q_{G(TH)}$			1.2				
	Q2				2.0				
Gate-to-Source Charge	Q1	$Q_{GS}$			3.4				
	Q2				5.5				
Gate-to-Drain Charge	Q1	$Q_{GD}$			5.4				
	Q2				3.6				
Total Gate Charge	Q1	$Q_{G(TOT)}$		$V_{GS} = 10\text{ V}, V_{DS} = 15\text{ V}; I_D = 30\text{ A}$		22.2			nC
	Q2					30.3			
Gate Resistance	Q1	$R_G$	$T_A = 25^\circ\text{C}$		1.0		$\Omega$		
	Q2				1.0				

### SWITCHING CHARACTERISTICS (Note 6)

Turn-On Delay Time	Q1	$t_{d(ON)}$	$V_{GS} = 4.5\text{ V}, V_{DS} = 15\text{ V},$ $I_D = 15\text{ A}, R_G = 3.0\ \Omega$		8.9		ns
	Q2				10.6		
Rise Time	Q1	$t_r$			21.2		
	Q2				4.6		
Turn-Off Delay Time	Q1	$t_{d(OFF)}$			15.3		
	Q2				21		
Fall Time	Q1	$t_f$			4.4		
	Q2				4.9		

### SWITCHING CHARACTERISTICS (Note 6)

Turn-On Delay Time	Q1	$t_{d(ON)}$	$V_{GS} = 10\text{ V}, V_{DS} = 15\text{ V},$ $I_D = 15\text{ A}, R_G = 3.0\ \Omega$		6.7		ns
	Q2				8.1		
Rise Time	Q1	$t_r$			19.5		
	Q2				15		
Turn-Off Delay Time	Q1	$t_{d(OFF)}$			20.1		
	Q2				26.2		
Fall Time	Q1	$t_f$			2.8		
	Q2				3.1		

### DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Voltage	Q1	$V_{SD}$	$V_{GS} = 0\text{ V},$ $I_S = 10\text{ A}$	$T_J = 25^\circ\text{C}$		0.82	V
				$T_J = 125^\circ\text{C}$		1.15	
	Q2		$V_{GS} = 0\text{ V},$ $I_S = 10\text{ A}$	$T_J = 25^\circ\text{C}$		0.8	
				$T_J = 125^\circ\text{C}$		1.10	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. Switching characteristics are independent of operating junction temperatures.

# NTMFD4C87N

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise specified)

Parameter	FET	Symbol	Test Condition	Min	Typ	Max	Unit
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>							
Reverse Recovery Time	Q1	t <sub>RR</sub>	V <sub>GS</sub> = 0 V, d <sub>IS</sub> /d <sub>t</sub> = 100 A/μs, I <sub>S</sub> = 30 A		29.1		ns
	Q2				40.2		
Charge Time	Q1	t <sub>a</sub>			14.2		
	Q2				19.5		
Discharge Time	Q1	t <sub>b</sub>			14.6		
	Q2				20.6		
Reverse Recovery Charge	Q1	Q <sub>RR</sub>			21		nC
	Q2				39		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.

6. Switching characteristics are independent of operating junction temperatures.

# NTMFD4C87N

## TYPICAL CHARACTERISTICS – Q1

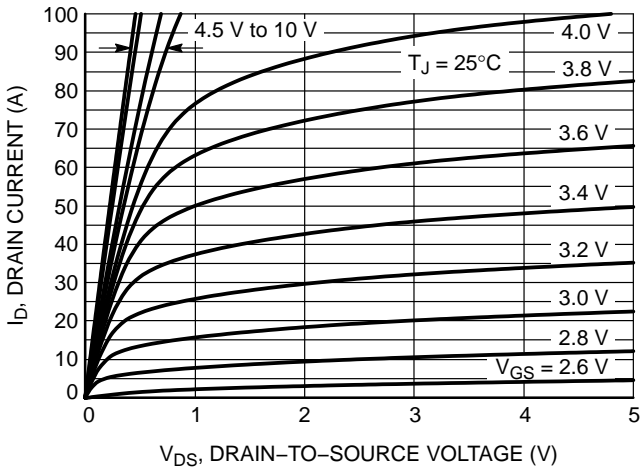


Figure 3. On-Region Characteristics

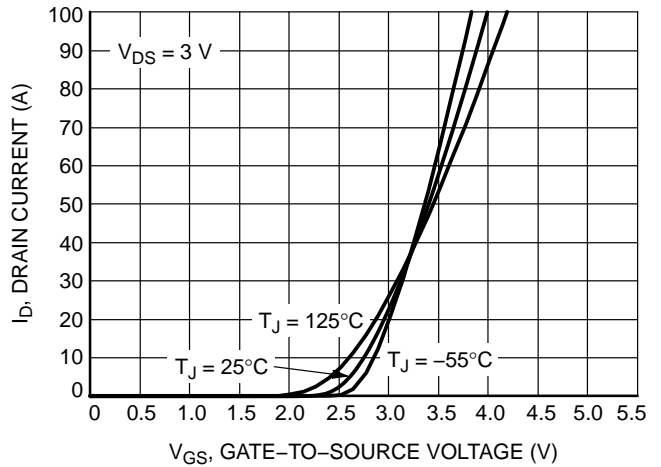


Figure 4. Transfer Characteristics

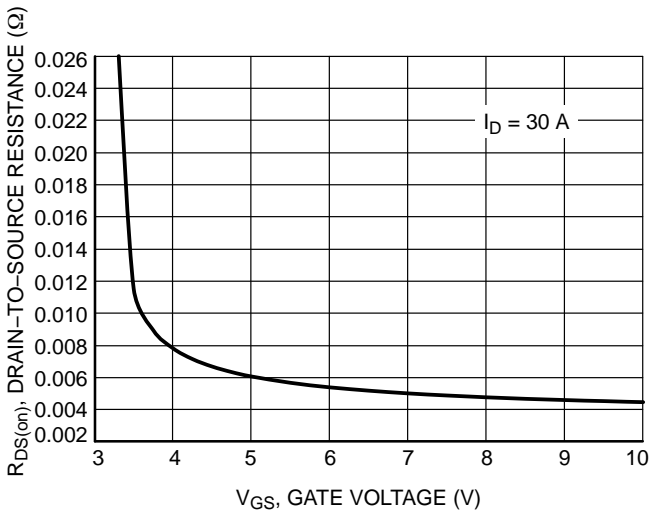


Figure 5. On-Resistance vs. Gate-to-Source Voltage

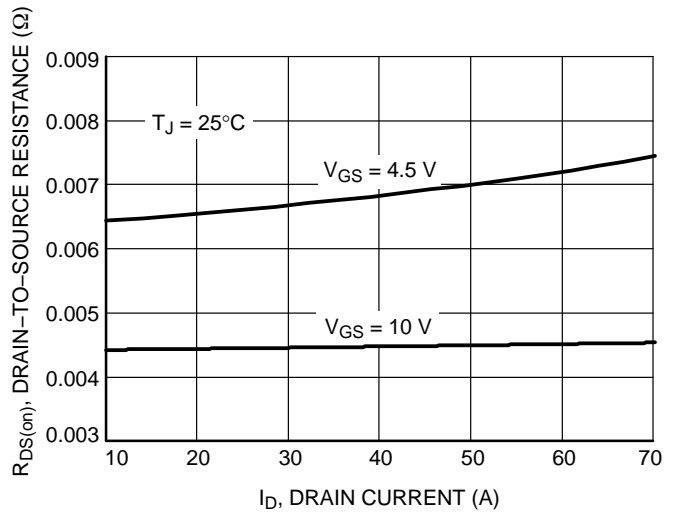


Figure 6. On-Resistance vs. Drain Current and Gate Voltage

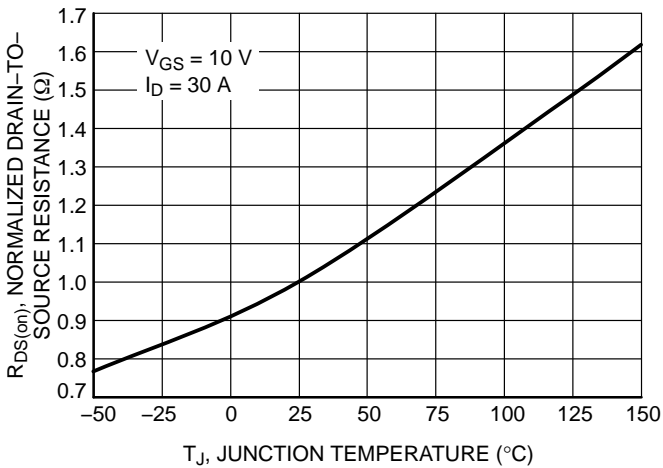


Figure 7. On-Resistance Variation with Temperature


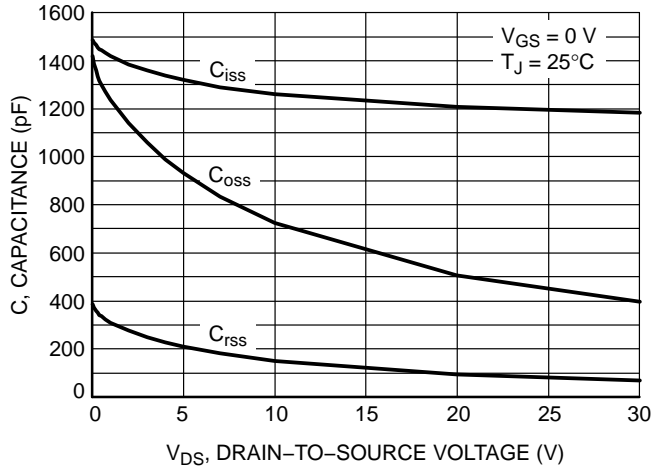



Figure 8. Capacitance Variation

# NTMFD4C87N


## TYPICAL CHARACTERISTICS – Q1

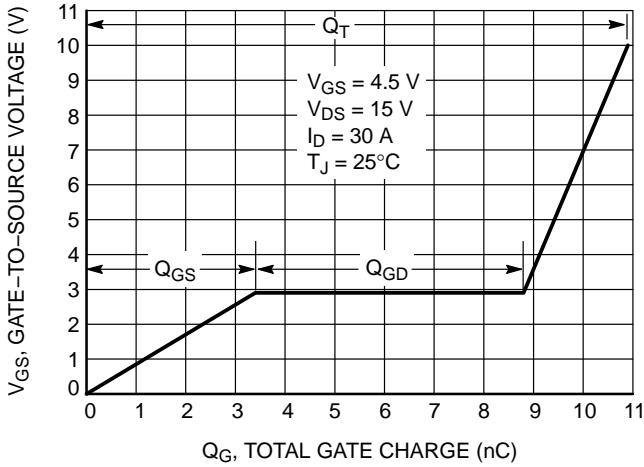


**Figure 9. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge**

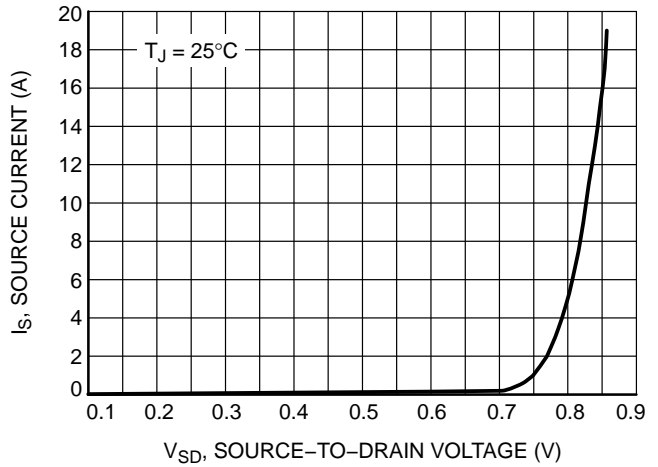


**Figure 10. Diode Forward Voltage vs. Current**

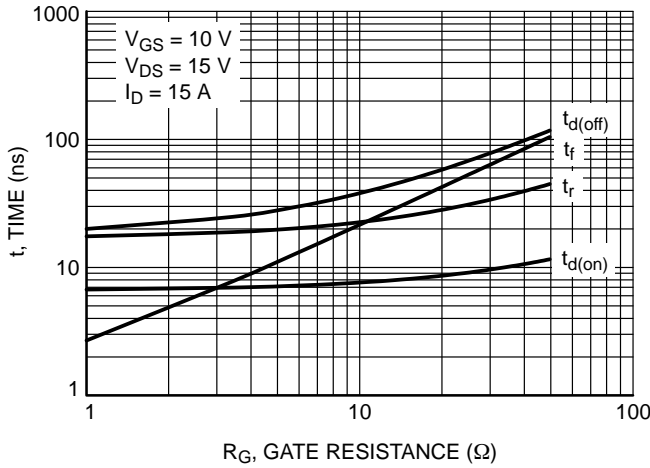

**Figure 11. Resistive Switching Time Variation vs. Gate Resistance**

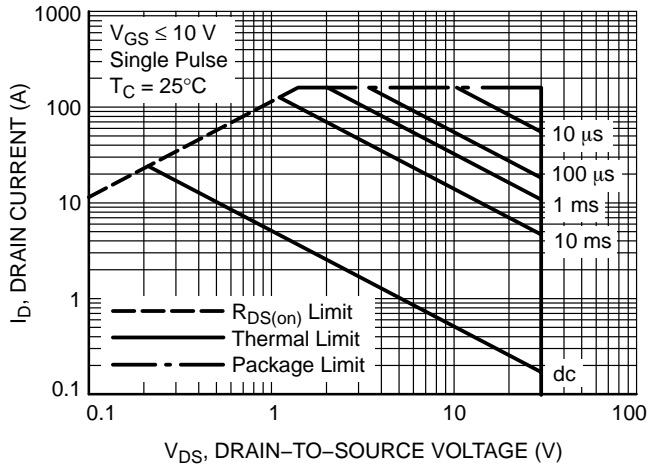

**Figure 12. Maximum Rated Forward Biased Safe Operating Area**

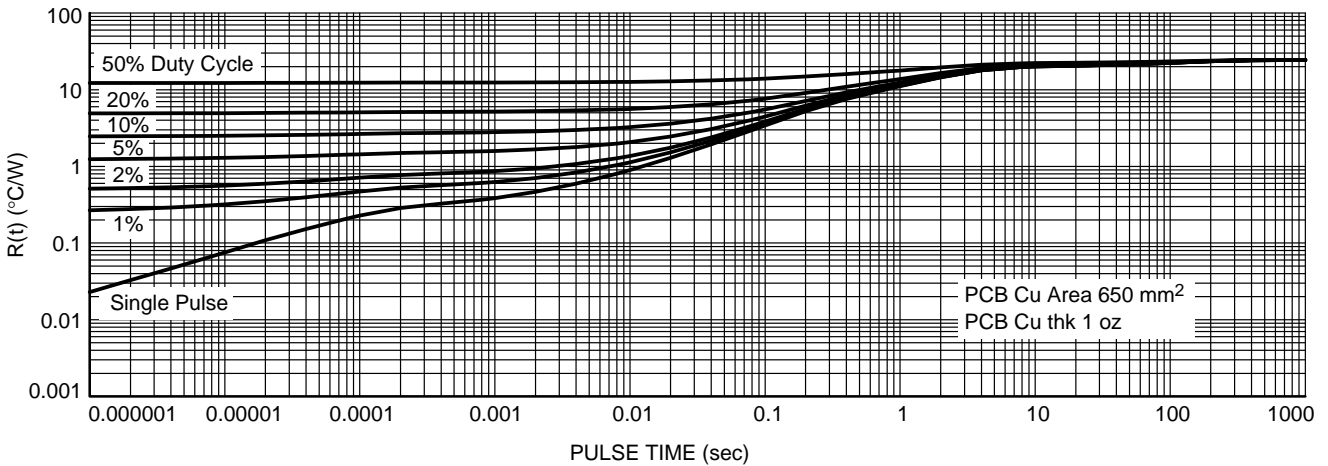

**Figure 13. Thermal Characteristics**

# NTMFD4C87N

## TYPICAL CHARACTERISTICS – Q2

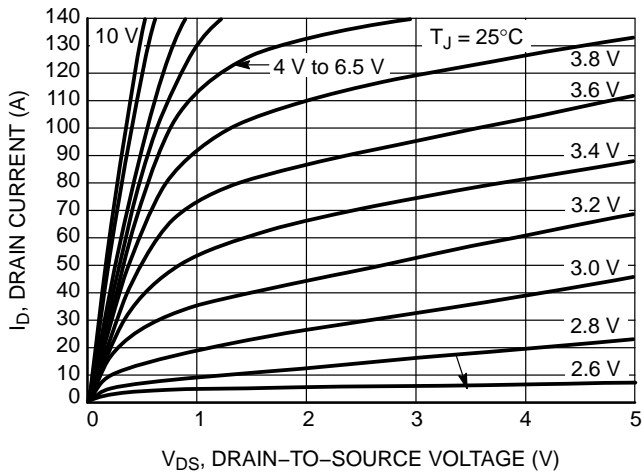


Figure 14. On-Region Characteristics

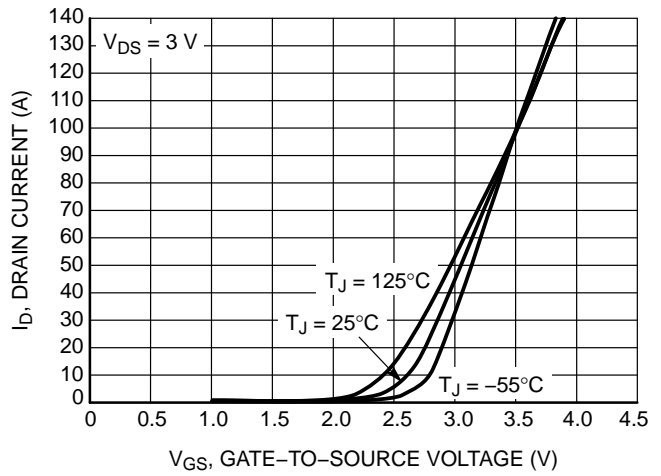


Figure 15. Transfer Characteristics

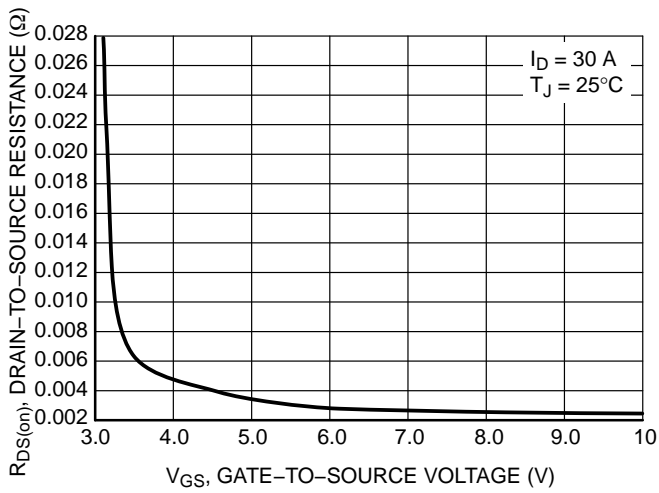


Figure 16. On-Resistance vs.  $V_{GS}$

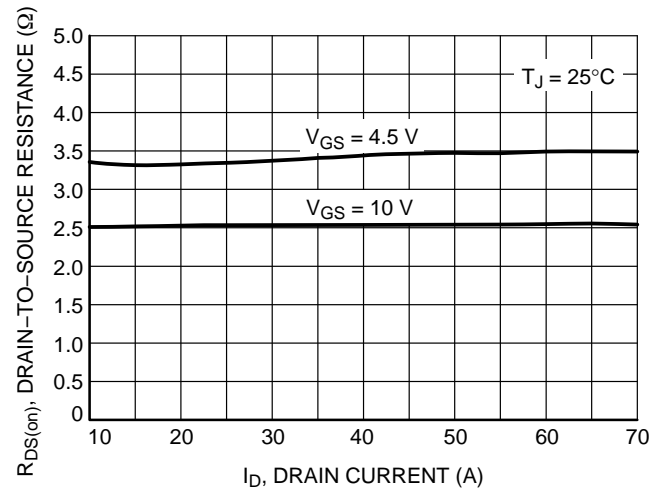


Figure 17. On-Resistance vs. Drain Current and Gate Voltage

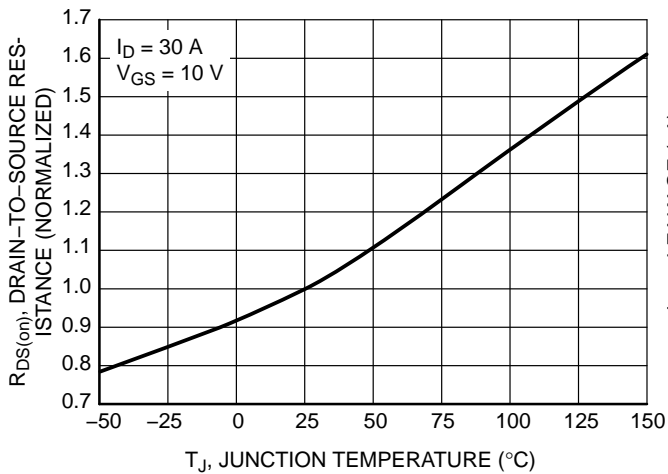


Figure 18. On-Resistance Variation with Temperature


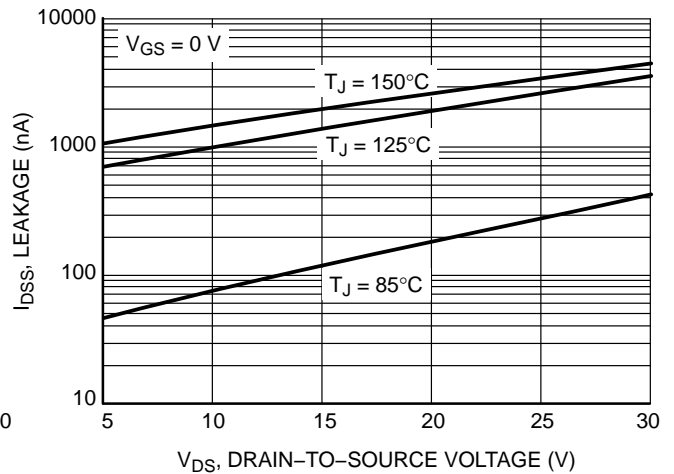


Figure 19. Drain-to-Source Leakage Current vs. Voltage




# NTMFD4C87N


## TYPICAL CHARACTERISTICS – Q2

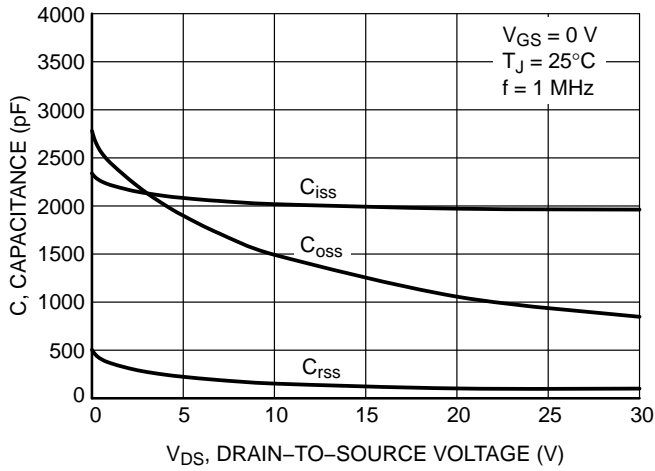

**Figure 20. Capacitance Variation**

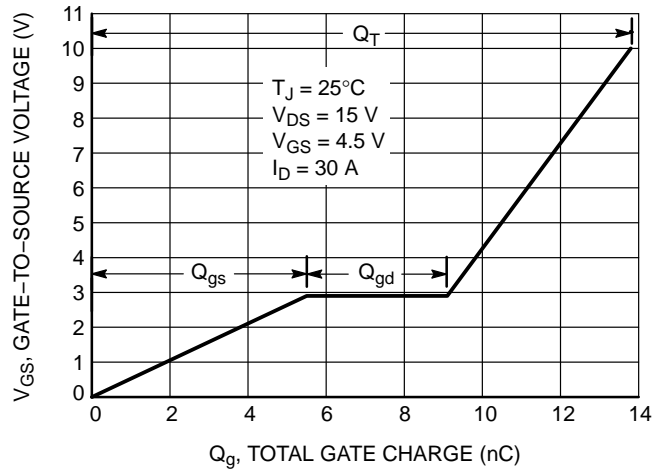


**Figure 21. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge**

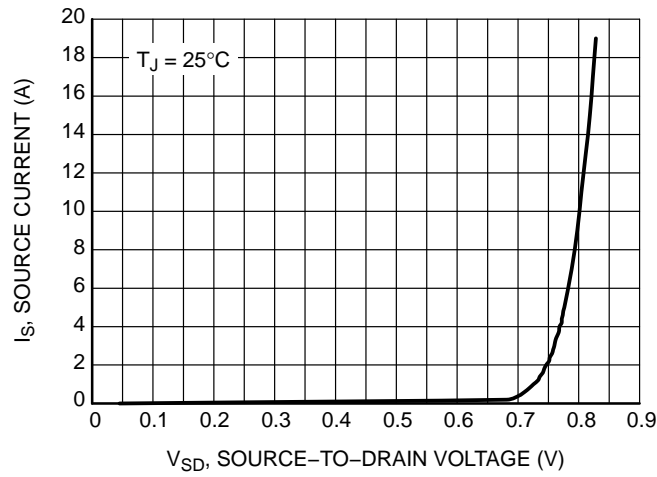


**Figure 22. Diode Forward Voltage vs. Current**

# NTMFD4C87N


## TYPICAL CHARACTERISTICS – Q2

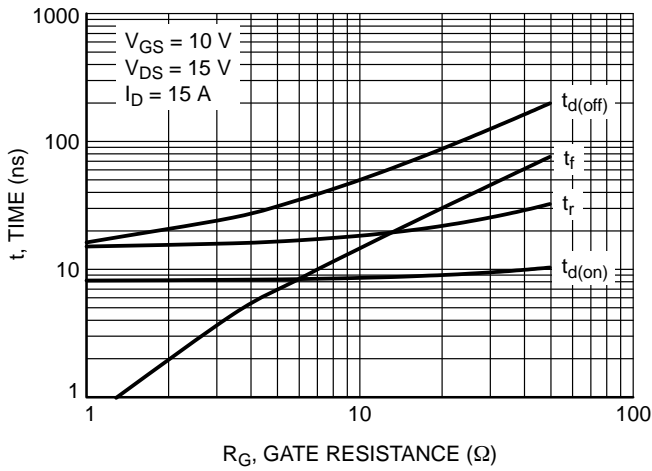

**Figure 23. Resistive Switching Time Variation vs. Gate Resistance**

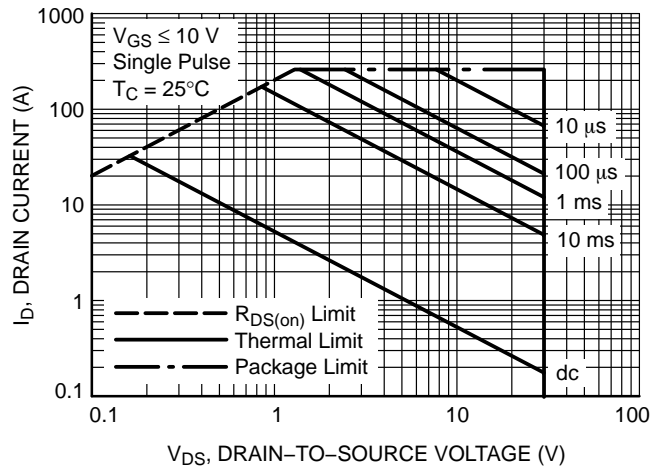

**Figure 24. Maximum Rated Forward Biased Safe Operating Area**

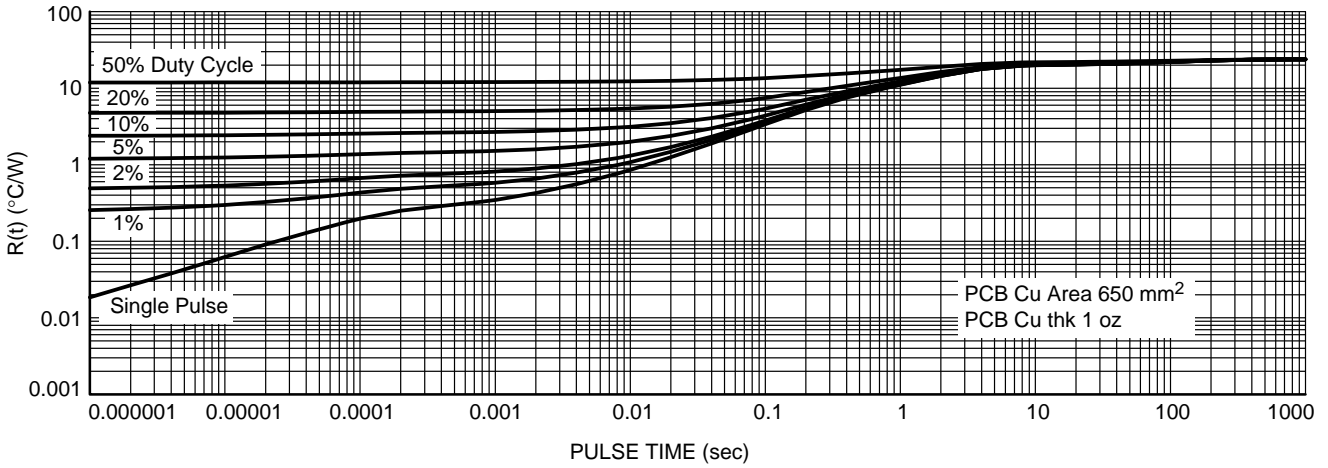

**Figure 25. Thermal Characteristics**

### ORDERING INFORMATION



Device	Package	Shipping <sup>†</sup>
NTMFD4C87NT1G	DFN8 (Pb-Free)	1500 / Tape & Reel
NTMFD4C87NT3G	DFN8 (Pb-Free)	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NTMFD4C87N



## PACKAGE DIMENSIONS

DFN8 5x6, 1.27P PowerPhase FET  
CASE 506CR  
ISSUE B

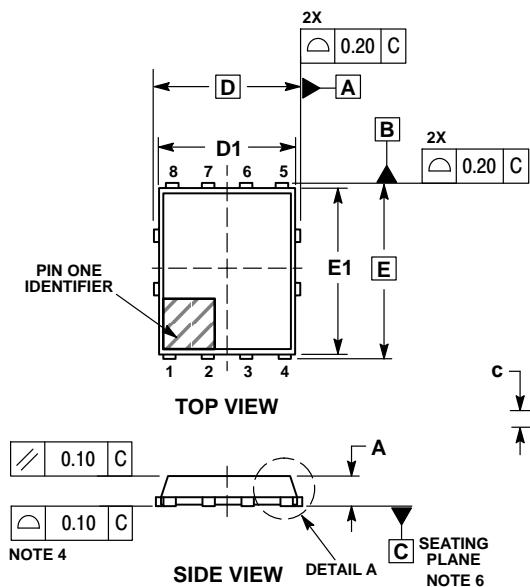


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSIONS b AND b1 APPLY TO PLATED TERMINAL AND ARE MEASURED BETWEEN 0.15 AND 0.25 MM FROM THE TIPS.
  4. COPLANARITY APPLIES TO THE EXPOSED PADS AS WELL AS THE TERMINALS.
  5. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
  6. SEATING PLANE IS DEFINED BY THE TERMINALS. A1 IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

MILLIMETERS		
DIM	MIN	MAX
A	0.90	1.10
A1	0.00	0.05
b	0.40	0.60
b2	0.40	0.60
c	0.20	0.30
D	5.15 BSC	
D1	4.90	5.10
D2	3.70	3.90
D3	2.96	3.16
E	6.15 BSC	
E1	5.80	6.00
E2	2.37	2.57
E3	1.05	1.25
E4	1.36	1.56
e	1.27 BSC	
G	0.625 BSC	
G1	1.615 BSC	
h	—	12 °
L	0.34	0.59
L2	1.68	1.93

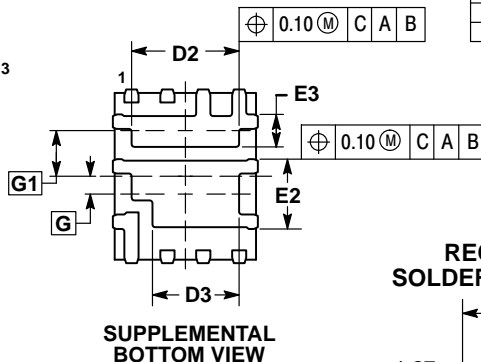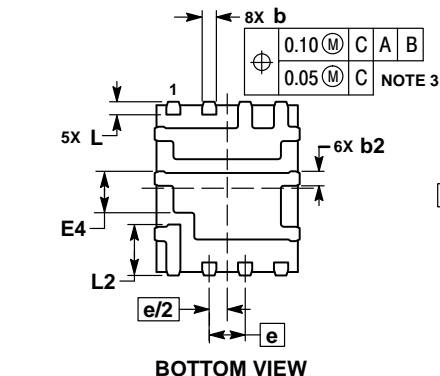


### RECOMMENDED SOLDERING FOOTPRINT\*

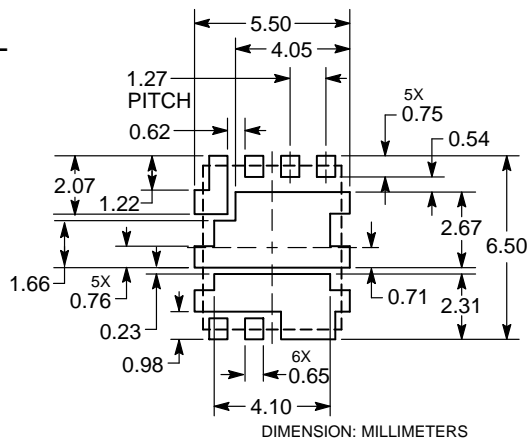

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NTMFD4C87N

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local  
Sales Representative

NTMFD4C87N/D