

# JUTXA F Series

## General Specifications

Model : FH5A/V

JUTXA

Square Root Extractor

### 1. GENERAL

This signal conditioner extracts square roots of 1~5V DC signals and converts them to current or voltage signals.

- Incorporation of one-chip microcomputer provides high efficiency and superior performance.
- Use of Handy Terminal allows easy on-site low-cut point setting, zero and span adjustment, and I/O monitoring.

### 2. SPECIFICATIONS

IO Specifications	
Input signal	1~5VDC
Input resistance	1MΩ (100kΩ when power off)
Permissible applied voltage	±9V DC
Input compensation function	Square root computation: $Y=2, \sqrt{X-1}+1(V)$ (Y: output signal, and X: input signal)
Output signal	DC current or voltage signal
Zero point adjustment range	±10% of span
Span adjustment range	±10% of span
Standard performance	
Precision rating	±0.1% of span
Response speed	200ms 63% response (10~90%)
Insulation resistance	100MΩ min (at 500V DC) between input~output, input~power supply and output~power supply
Voltage withstand	1500V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (no condensation)
Power supply voltage	24V DC ±10% (ripple : 10% P-P max)
Effect of power supply voltage fluctuation	±0.1% max of span per 24V DC ±10% fluctuation
Effect of change in ambient temperature	±0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 85mA (FH5A), 50mA (FH5V)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 24 x 127 mm (h x w x d)
Weight	130g
Accessories	
Tag number label : x1	
Mounting blocks: x2	M4 mounting screws: x2

FH5□-□□ \*B

TYPE NO.

OUTPUT SPECIFICATION

A: Current

V: Voltage

INPUT SIGNAL

6: 1~5V DC

OUTPUT SIGNAL

FH5A FH5V

A: 4~20mA DC 1: 0~10mV DC

B: 2~10mA DC 2: 0~100mV DC

C: 1~5mA DC 3: 0~1V DC

D: 0~20mA DC 4: 0~10V DC

E: 0~16mA DC 5: 0~5V DC

F: 0~10mA DC 6: 1~5V DC

G: 0~1mA DC 7: -10~-+10V DC

Z: (custom) current signal 0: (custom) voltage signal  
(24mA max) ( $\pm 10V$  max)

### POWER SUPPLY

24V DC $\pm 10\%$

### OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


FH5A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC	5MΩ min	0~750Ω
2~10mA DC		0~1500Ω
1~5mA DC		0~3000Ω
0~20mA DC		0~750Ω
0~16mA DC		0~900Ω
0~10mA DC		0~1500Ω
0~1 mA DC		0~15kΩ
Others where $I_{100}=24mA$ max		(15/100)Ω max

$I_{100}$ : 100% output current


FH5V (DC Voltage Output)		
Output Signal	Output Resistance	Permissible Load Resistance
0~10mV DC	100Ω max	250kΩ min
0~100mV DC		2kΩ min
0~1V DC		10kΩ min
0~10V DC		2kΩ min
0~5V DC		2kΩ min
1~5V DC		2kΩ min
-10~-+10V DC		10kΩ min
Others where $V_{100} \leq 100mV$	100Ω max	250kΩ min
$V_{100}=24mA$ max	1Ω max	10kΩ min

$V_{100}$ : 100% output voltage

### WIRING DIAGRAM

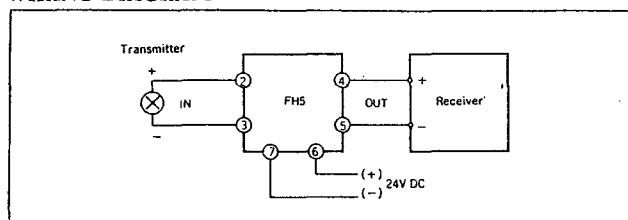

### EXTERNAL DIMENSION

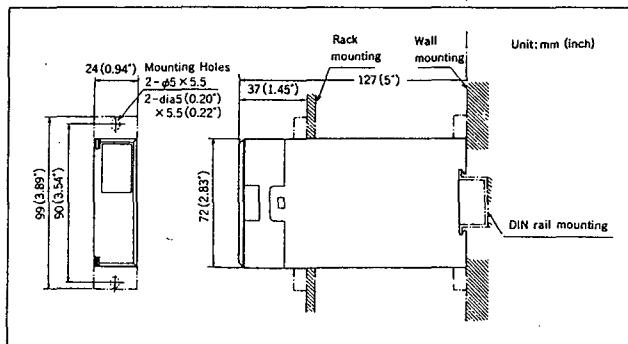

Subject to change without notice for grade up quality and performance