

JUXTA F Series

General Specifications

Model : FQ1AV

JUXTA

Pulse / Analog Transmitter

1. GENERAL

This instrument converts pulse train signals to current or voltage signals.

- Built-in 12/24V power supply for pulse transmitter.
- Input pulses include current pulse, voltage pulse, no-voltage contact, and open collector contact.

2. SPECIFICATIONS

IO Specifications	
Input signal	0~F100Hz (F100 is 100% input frequency) (50Hz ≤ F100 ≤ 10kHz)
Input resistance	10kΩ min
Input signal level	Voltage pulse input
Pulse height	Lo level (VL) -1~8V Hi level (VH) 2V min VH - VL = 2~50V
Input pulse width	Pulse width when 100% input, duty is 50±30% max
Output signal	DC current or voltage signal
Zero point adjustment range	±1% of span
Span adjustment range	±5% of span
Standard performance	
Precision rating	±0.3% of span (at 10% min input)
Response speed	600ms (100Hz min span), 3 sec (100Hz max span) 63% response (10~90%)
Insulation resistance	100MΩ min (at 500V DC) between input-output, input-power supply and output-power supply
Voltage withstand	1500V AC/minute between input-output, input-power supply 500V AC/minute between output-power supply
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (no condensation)
Power supply voltage	24V DC ±10% (ripple : 10% P-P max)
Effect of power supply voltage fluctuation	±0.1% max of span per 24V DC ±10% fluctuation
Effect of change in ambient temperature	±0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 90mA (FQ1A), 60mA (FQ1V)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 24 x 127 mm (h x w x d)
Weight	130g
Accessories	
Tag number label : x1	
Mounting blocks: x2	M4 mounting screws: x2

FQ1-□□*B

TYPE NO.

OUTPUT SPECIFICATION

A: Current

V: Voltage

INPUT SIGNAL

1: 12V DC $\pm 10\%$ transmitter power supply

2: 24V DC $\pm 10\%$ transmitter power supply

3: No transmitter power supply

OUTPUT SIGNAL

FQ1A

A: 4~20mA DC

B: 2~10mA DC

C: 1~5mA DC

D: 0~20mA DC

E: 0~16mA DC

F: 0~10mA DC

G: 0~1mA DC

Z: (custom) current signal
(24mA max)

FQ1V

1: 0~10mV DC

2: 0~100mV DC

3: 0~1V DC

4: 0~10V DC

5: 0~5V DC

6: 1~5V DC

7: -10~+10V DC

0: (custom) voltage signal
($\pm 10V$ max)

POWER SUPPLY

24V DC $\pm 10\%$

OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


FQ1A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC	5M Ω min	0~750 Ω
2~10mA DC		0~1500 Ω
1~5mA DC		0~3000 Ω
0~20mA DC		0~750 Ω
0~16mA DC		0~900 Ω
0~10mA DC		0~1500 Ω
0~1mA DC		0~15k Ω
Others where I ₁₀₀ =24mA max		

I₁₀₀ : 100% output current


FQ1V (DC Voltage Output)			
Output Signal	Output Resistance	Permissible Load Resistance	
0~10mV DC	100 Ω max	250k Ω min	
0~100mV DC		250k Ω min	
0~1V DC	1 Ω max	2k Ω min	
0~10V DC		10k Ω min	
0~5V DC		2k Ω min	
1~5V DC		2k Ω min	
-10~+10V DC		10k Ω min	
Others where V ₁₀₀ \leq 100mV	100 Ω max	250k Ω min	
V ₁₀₀ = 24mA max	V ₁₀₀ > 100mV	1 Ω max	10k Ω min

V₁₀₀ : 100% output voltage

WIRING DIAGRAM

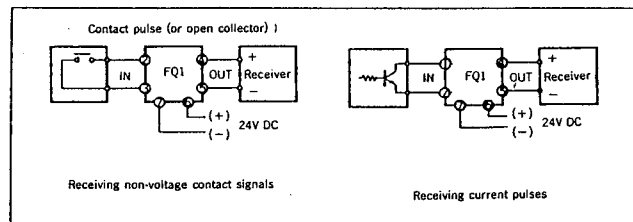

EXTERNAL DIMENSION

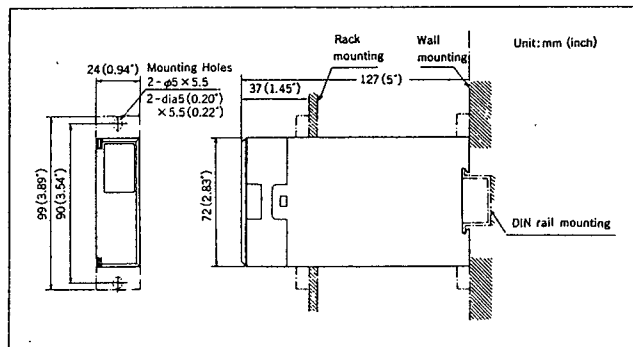

Subject to change without notice for grade up quality and performance