

JUXTA W Series General Specification

Model WX1□-VL (Variable software type)
WX2□-VL (Fixed software type)
Velocity Limiter

JUXTA

1. GENERAL

This is a variable or fixed software type computing unit which accepts a voltage signal from various converters, limits velocity with respect to changes in ascending or descending input by a velocity limit value set by a handy terminal or variable resistor, and as a result outputs DC voltage or current signal corresponding to that value.


2. SPECIFICATIONS

Model No.	WX1A-VL, WX1V-VL	WX2A-VL, WX2V-VL
Input signal	DC voltage signal: 1 point	DC voltage signal: 1 point Volume setting
Measuring range	0 to 10 V DC (Measuring span: More than 2 V) (*1)	
Input resistance	1 MΩ (At power failure: More than 100 KΩ)	
Output signal	4 to 20 mA, 2 to 10 mA, 1 to 5 mA, 0 to 20 mA, 0 to 16 mA, 0 to 10 mA or 0 to 1 mA DC 0 to 10 mV, 0 to 100 mV, 0 to 1 V, 0 to 10 V, 0 to 5 V, 1 to 5 V or -10 to +10 V DC	
Velocity limit value setting range	0.1 to 600.0%/min. (*2)	1 to 600.0%/min
	When input change is smaller than velocity limit value or velocity limit value is set to more than 700%/min, signal is output without velocity limitation.	
Basic accuracy	±0.1% of measuring span	±0.2% of measuring span
Signal insulation	Between any of input signal, output signal, power supply circuits and grounding	
Insulation resistance	Between any of input, output and power (DC driven)	100 MΩ/500 V DC
	Between any of input, output, power and grounding (AC driven)	
Dielectric strength	Between input and output/power: 1500 V AC/min, and between output and power: 500 V AC/min. (DC driven)	Between any of input, output, power and grounding: 1500 V AC/min. (AC driven)
	Between any of input, output, power and grounding: 1500 V AC/min. (AC driven)	
Power supply voltage	85 to 264 V AC 47 to 63 Hz, or 24 V DC ±10%	
Ambient temperature/humidity	0 to 50°C (32 to 122°F) and 5 to 93% relative humidity (No condensation)	
Effect of ambient temperature	±0.2% of span for 10°C (50°F) change	
Effect of power supply voltage	±0.1% of span for 85 to 264 V AC or 24 V DC ±10% variation	±0.2% of span for 85 to 264 V AC or 24 V DC ±10% variation
Power consumption	100 V AC, 7.0 VA (voltage output) and 100 V AC, 8.5 VA (current output) 24 V DC, 60 mA (voltage output) and 24 V DC, 82 mA (current output)	
Dimensions	72 (2.83") H × 48 (1.89") W × 127 (5.00") D mm (inch)	
Weight	Approx. 150 g (DC driven), 280 g (AC driven)	
Accessories	Tag number label : 1 sheet Mounting blocks: 2 pcs.	

Specify the following:

(*1) Measuring range from □ to □ V.

(*2) Ascending velocity limit: □%/min
Descending velocity limit: □%/min

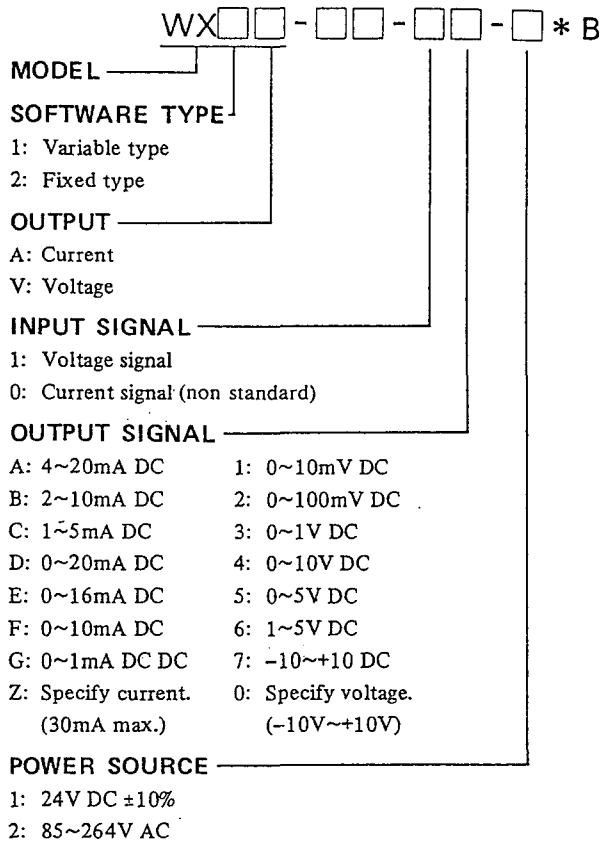

Ordering Information

Measuring Range of Input	
Voltage input signal: 2V min. Span for 0~10V DC Current input signal (input resist. 250Ω): (250Ω) × (Input current) shall be within the measuring span of voltage input signal.	
	Recommended Range
Current signal	4~20mA DC
	2~10mA DC
	0~20mA DC
	0~16mA DC 0~10mA DC
Voltage signal	0~10V DC
	0~ 5V DC
	1~ 5V DC

(Note) Change of input between voltage and current is impossible by Handy Terminal.

OUTPUT RESISTANCE AND LOAD RESISTANCE

Output Signal	Load Resistance	Output Impedance
4 to 20mA DC	0 to 750Ω	5MΩ or more
2 to 10mA DC	0 to 1500Ω	
1 to 5mA DC	0 to 3000Ω	
0 to 20mA DC	0 to 750Ω	
0 to 16mA DC	0 to 900Ω	
0 to 10mA DC	0 to 1500Ω	
0 to 1mA DC	0 to 15kΩ	

Output Signal	Load Resistance	Output Impedance
0 to 10mV DC	100kΩ or more	100Ω or less
0 to 100mV DC		
0 to 1V DC	2kΩ or more	1Ω or less
0 to 5V DC		
1 to 5V DC		
0 to 10V DC	10kΩ or more	
-10 to +10V DC		

Subject to change without notice for grade up quality and performance