



GS 04L03A01-00E

### OVERVIEW

The DX200C is a DAQSTATION that displays real-time measured data on a color LCD and saves data on a 3.5-inch floppy disk, PCMCIA ATA flash memory card or Zip disk. It can be hooked up to network via Ethernet, which enables to inform by E-mail and to monitor on Web site as well as to transfer files by using FTP. Also, it can communicate with FOUNDATION™ Fieldbus and Modbus. It comes with a four or eight model. As the input signal, a DC voltage, thermocouple, resistance temperature detector, or contact signal can be set to each channel. The data saved on a floppy disk can be converted by data conversion software to Lotus 1-2-3, Excel, or ASCII format file, facilitating processing on a PC. Not only this, the Viewer software allows a PC to display waveforms on its screen and to print out waveforms. In addition to normal trend (T-Y), circular trend can be seen in this model.



### STANDARD SPECIFICATIONS

#### General Specifications

##### Construction

- Mounting :
  - Flush panel mounting (on a vertical plane)
  - Mounting may be inclined downward up to 30 degrees from a horizontal plane.
- Allowable Panel Thickness :
  - 2 to 26 mm
- Material :
  - Case : drawn steel
  - Bezel : polycarbonate
  - Front filter : polycarbonate
- Case Color :
  - Case : Grayish blue green (Munsell 2.0B 5.0/1.7 or equivalent)
  - Bezel : Charcoal grey light (Munsell 10B 3.6/0.3 or equivalent)
- Front Panel :
  - Water and dust-proof (based on IEC529-IP65, NEMA No. 250 TYPE 4 (except external icing test))
- Dimensions :
  - 288(W) x 288(H) x 220(D) mm
- Weight :
  - DX204C : approx. 6.6 kg
  - DX208C : approx. 6.8 kg

##### Input

- Number of Inputs :
  - DX204C : four channels
  - DX208C : eight channels
- Measurement Interval :
  - 125 ms

Inputs :

DCV (DC voltage), TC (thermocouple), RTD (resistance temperature detector), DI (digital input for event recording), DCA (DC current with external shunt resistor attached)

Input type	Range	Measuring range
DCV	20 mV	-20.00 to 20.00 mV
	60 mV	-60.00 to 60.00 mV
	200 mV	-200.0 to 200.0 mV
	2 V	-2.000 to 2.000 V
	6 V	-6.000 to 6.000 V
	20 V	-20.00 to 20.00 V
TC	50 V	-50.00 to 50.00 V
	R <sup>*1</sup>	0.0 to 1760°C 32 to 3200°F
	S <sup>*1</sup>	0.0 to 1760°C 32 to 3200°F
	B <sup>*1</sup>	0.0 to 1820°C 32 to 3200°F
	K <sup>*1</sup>	-200.0 to 1370°C -328 to 2498°F
	E <sup>*1</sup>	-200.0 to 800°C -328.0 to 1472.0°F
	J <sup>*1</sup>	-200.0 to 1100°C -328.0 to 2012.0°F
	T <sup>*1</sup>	-200.0 to 400°C -328.0 to 752.0°F
	N <sup>*1</sup>	0.0 to 1300°C 32 to 2372°F
	W <sup>*2</sup>	0.0 to 2315°C -328.0 to 4199°F
RTD <sup>*5</sup>	L <sup>*3</sup>	-200.0 to 900°C -328.0 to 1652.0°F
	U <sup>*3</sup>	-200.0 to 400°C -328.0 to 752.0°F
	Pt100 <sup>*4</sup>	-200.0 to 600°C -328.0 to 1112.0°F
DI	JPt100 <sup>*4</sup>	-200.0 to 550°C -328.0 to 1022.0°F
	DCV input (TTL)	OFF : less than 2.4 V ON : more than 2.4 V
	Contact input	Contact on/off

\*1 R, S, B, K, E, J, T, N : IEC584-1 (1995), DIN IEC584, JIS C1602-1995  
 \*2 W : W-5% Rd/W-26% Rd (Hoskins Mfg. Co.), ASTM E988  
 \*3 L : Fe-CuNi, DIN43710, U : Cu-CuNi, DIN43710  
 \*4 Pt100 : JIS C1604-1997, IEC751-1995, DIN IEC751-1996  
 JPt100 : JIS C1604-1989, JIS C1606-1989  
 \*5 Measuring current : i = 1 mA

A/D Integration Time :

Fixed to 20 ms (50 Hz), 16.7 ms (60 Hz) or AUTO selectable (automatic selection by detection of power supply frequency)

Thermocouple Burnout :  
 Burnout upscale/downscale function can be switched on/off (for each channel).  
 Burnout upscale/downscale selectable

Filter :  
 On/off selectable for each channel  
 Time constant : selectable from 2, 5, and 10 seconds

Calculation :  
 Differential computation :  
 Between any two channels  
 Available for DCV, TC, and RTD ranges.

Linear scaling :  
 Available for DCV, TC, and RTD ranges.  
 Scaling limits : -30000 to 30000  
 Decimal point : user-selectable  
 Engineering unit : user-definable, up to 6 characters

Square root :  
 Available for DCV range.  
 Scaling limits : -30000 to 30000  
 Decimal point : user-selectable  
 Engineering unit : user-definable, up to 6 characters

**Display**

Display unit :  
 10.4-inch TFT color LCD  
 (VGA, 640 x 480 pixels)

Note In the part of crystal display, there are some pixels that can't always turn on or off. Please understand that the brightness of screen looks uneven because of characteristics of crystal display, but it is not out of order.

Display color :  
 Trend/Bargraph :  
 Selectable from 30 colors

Background :  
 White or black selectable

Trend display :  
 Trend display direction Circular or T-Y :  
 vertical or horizontal selectable

Number of indication channels :  
 10 channels per display (maximum)

All channels indication :  
 30 channels (maximum)

Number of display :  
 4 displays (4 group)

Line width : 1, 2, and 3 pixels selectable

Waveform span rate :  
 T-Y : 1, 2, 5, 10, 20, 30 min., 1, 2, 4, 10 hours/  
 div selectable  
 Circular : 1, 2, 6, 8, 12, 16 hours/rev, 1, 2 days/rev,  
 1, 2, 4 weeks/rev selectable

Bargraph display :  
 Direction : Vertical or horizontal selectable

Number of indication channels :  
 10 channels per display

Number of display :  
 4 displays (4 group)

Scales : 4 to 12 selectable

Reference position :  
 Left, right or center (only for horizontal)

Display renewal rate : 1 s

Digital indication :  
 Number of indication channels :  
 10 channels per display

Number of display :  
 4 displays (4 group)

Display renewal rate : 1 s

Overview display :  
 Number of indication channels :  
 Measuring values and alarm status of all channels

Information display :  
 Alarm summary display :  
 Display the list of alarm summary

Message summary display :  
 Display the list of messages and time.  
 Jump to trend display by cursor pointing.

Memory information :  
 Display the file list in internal memory.  
 Jump to trend display by cursor pointing.

Medium information :  
 Display the file list in external memory.  
 Jump to trend display by cursor pointing.

Tags :  
 Number of characters :  
 16 characters maximum

Other display contents :  
 Memory status, Scale values, (0 and 100%, display on/off selectable), Scales (maximum 10 scales for T-Y, first 4 scales for Circular), grid lines (number of divisions selectable from 4 to 12), hour : minutes on grid, trip levels (line widths are selectable from 1, 2 and 3 pixels), messages (up to eight different messages of up to 16 characters for each), alarm indication

Data referencing function :  
 Display the retrieved data (display data or event data) from internal or external memory.  
 Display format : Whole display or divided to 2 areas (T-Y)  
 Time axis operation : Display magnification or reduction, scroll by key operation (T-Y)

Display auto scroll function :  
 Display group of monitor display (trend display, bargraph display and digital display) automatically changes in a preset interval (5, 10, 20, 30 s and 1 min).

Display end mode :  
 Select from New or Update (Circular)  
 Display end mode defines displaying trend line on a circular screen when trend data comes full circle.

New : Erase all trend line on a circular screen and display the data on a new screen

Update : The data is continuously written while it is being partially erased.

Time axis scale (Circular) :  
 The number of partitions in the direction of the time axis depends on selected waveform span rate (see the table below)

Time/rev	Number of main scale	Sub scale per main scale
1 h	12	2
2	12	2
6	12	2
8	8	2
12	12	2
16	8	2
1 day	12	2
2	12	2
1 week	7	4
2	7	4
4	4	7

LCD saver function :  
The LCD backlight automatically dims if no key is touched for a certain preset time (can be set from 1, 2, 5, 10, 20 and 60 min).

Temperature unit :  
°C or °F selectable

Language :  
English, French and German selectable

#### Data Saving Function

External storage medium :  
Selectable from :  
1) 3.5-inch floppy disk (2HD, 1.44 MB)  
2) PCMCIA ATA flash memory card  
3) Zip disk

Saving method :  
Manual or automatic selectable

Manual saving :  
Data saving by inserting external memory medium

Automatic saving :  
Display data :  
Periodic saving (10 min to 31 days) or key operation to external memory

Event data :  
In case of trigger free...Periodic saving (3 min to 31 days) or key operation to external memory  
In case of using trigger...Save the data when sampling is finished

Data Saving Period :  
Display data file :  
Linked with the waveform span rate  
Event file : Linked with the specified sampling period

Event File Sampling Period :  
DX204C, DX208C :  
Selectable from 125, 250, 500 ms, and 1, 2, 5, 10, 30, 60, 120, 300, 600 s

Measurement data File :  
The following two file types can be created.  
• Event file (stores instantaneous values sampled periodically at a specified sampling rate)  
• Display data file (stores the maximum and minimum values for each waveform span rate from among measured data sampled at measurement intervals)

Files can be created in the following combinations.  
(a) Event file (only for trigger mode) + display data file  
(b) Display data file only  
(c) Event file only

Data format :  
YOKOGAWA standard format (Binary)

Data per channel :  
Display data file : Measurement data...4 byte/data, mathematical data...8 byte/data  
Event data file : Measurement data...2 byte/data, mathematical data...4 byte/data

Sampling time :  
The sampling time per file (or floppy disk) during manual data saving can be determined by the formula "number of data items per channel x interval of data saving." This logic is explained in more detail below :

1) When handling display data files only  
If we assume that the number of measuring channels is 8, the number of computing channels is 8, and the display update interval is 30 min/div (60 sec waveform span rate), then :

Number of data items per channel =  $1,200,000 \text{ bytes} / (8 \times 4 \text{ bytes} + 8 \times 8 \text{ bytes}) = 12,500 \text{ data items}^*$

\*Maximum number of data is 100,000.  
Sampling time per file =  $12,500 \times 60 \text{ sec} = 750,000 \text{ sec} = \text{approx. 8 days}$

2) When handling event files only  
If we assume that the number of measuring channels is 8, the number of computing channels is 8, and the data saving interval is 1 sec, then :

Number of data items per channel =  $1,200,000 \text{ bytes} / (8 \times 2 \text{ bytes} + 8 \times 4 \text{ bytes}) = 25,000 \text{ data items}^*$

\*Maximum number of data is 120,000.  
Sampling time per file =  $25,000 \times 1 \text{ sec} = 25,000 \text{ sec} = \text{approx. 7 hours}$

3) When handling both display data files and event files  
The sampling time is calculated by defining the size of data items in a display data file as 900,000 bytes and the size of data items in an event data file as 300,000 bytes. The method of calculation is the same as shown above.

\*Maximum number of data for display data file is 75,000.

Maximum number of data for event file is 30,000.  
If a Zip drive or an ATA memory card is being used, at least two volumes of the above-mentioned files (the quantity depends on the medium's capacity) are saved in that medium.

- System inform :
  - inform in recovering power failure/inform the time of recovering, inform the rest of time before rewriting on inside memory (manual save mode), inform the rest of amount in reaching 90% of media volume (auto save mode)
- Scheduled time inform :
  - inform the moment value at a certain time or interval
- Report inform :
  - inform report data in report timeup (/M1 is equipped)
- Web server function:
  - display an image, alarm information, and moment values of DX screen on browser soft (Microsoft Internet Explorer 5.0) message input from browser screen
- FTP client function:
  - file auto-transfer from DX (display data file, event file, and report file)
- FTP server function:
  - manual-transfer of file in the outside media from host computer, directory operation, information of file elimination and of rest of amount of memory in media
- Real time monitoring function:
  - real time monitoring DX data by communication (Yokogawa private protocol)

**Power Supply**

- Rated power supply :
  - 100 to 240 VAC (automatic switching)
- Allowable power supply voltage range :
  - 90 to 132 or 180 to 250 VAC
- Rated power supply frequency :
  - 50/60 Hz (automatic switching)
- Power consumption :

Supply voltage	LCD save mode	Normal	Max.
100 VAC	50 VA	53 VA	75 VA
240 VAC	78 VA	80 VA	106 VA

**Other Specifications**

- Clock :
  - With calendar function (year of grace) The time can be adjusted by a remote contact (with the remote option).
- Summer/winter time :
  - Summer and wintertime can be set.
- Accuracy of clock :
  - ±100 ppm, excluding a delay (of 1 second, maximum) caused each time the power is turned on.
- Memory backup :
  - A built-in lithium battery backs up the setup parameters (battery life : approximately ten years at room temperature).
- Key lock function :
  - ON/OFF and password can be set.
- Log in function :
  - Power on with log out mode and all key operations are not permitted. "User name", "User ID" and "password" are required to enter the operation mode. And key lock by password can be set to prevent to change settings.

- Insulation resistance :
  - Each terminal to ground terminal :
    - 20 MΩ or greater (at 500 VDC)
- Dielectric strength :
  - Power supply to ground terminal :
    - 1500 VAC (50/60 Hz), 1 min
  - Contact output terminal to ground terminal :
    - 1500 VAC (50/60 Hz), 1 min
  - Measuring input terminal to ground terminal :
    - 1500 VAC (50/60 Hz), 1 min
  - Between measuring input terminals :
    - 1000 VAC (50/60 Hz), 1 min
  - Between remote control terminal to ground terminal :
    - 500 VDC, 1 min

**Safety and EMC Standards**

- CSA: CSA22.2 No1010.1 installation category II\*1, pollution degree 2\*2
- UL: UL61010B-1 (CSA NRTL/C)
- CE:
  - EMC directive:
    - EN61326 compliance (Emission: Class A, Immunity: Annex A)
    - EN61000-3-2 compliant
    - EN61000-3-3 compliant
    - EN55011 compliant, Class A Group 1
  - Low voltage directive:
    - EN61010-1 compliant, measurement category II\*3, pollution degree 2\*2
- C-Tick: AS/NZS 2064 compliant, Class A Group 1
- \*1: Installation Category (Overvoltage Category) II Describes a number which defines a transient overvoltage condition. It implies the regulation for impulse withstand voltage. "II" applies to electrical equipment which is supplied from fixed installations like distribution boards.
- \*2: Pollution Degree Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering. "2" applies to normal indoor atmosphere. Normally, only non-conductive pollution occurs.
- \*3: Measurement Category II Applies to measuring circuits connected to low voltage installation, and electrical instruments supplied with power from fixed equipment such as electric switchboards.

**Normal Operating Conditions**

- Power voltage :
  - 90 to 132 or 180 to 250 VAC
- Power supply frequency :
  - 50 Hz ± 2%, 60 Hz ± 2%
- Ambient temperature :
  - 0 to 50°C (when using FDD or Zip : 5 to 40°C)
- Ambient humidity :
  - 20% to 80% RH (at 5 to 40°C)
- Vibration : 10 to 60 Hz, 0.2 m/s<sup>2</sup> or less
- Shock : Not acceptable
- Magnetic field :
  - 400 AT/m or less (DC and 50/60 Hz)
- Noise :
  - Normal mode (50/60 Hz) :
    - DCV : The peak value including the signal must be less than 1.2 times the measuring range.
    - TC : The peak value including the signal must be less than 1.2 times the measuring thermal electromotive force.
    - RTD : 50 mV or less

Examples of Sampling Time :

In case measurement ch = 4 ch, mathematical ch = 0 ch

Only display data file (approx.)

Waveform span rate (min/div)	1 min	5 min	20 min	30 min	60 min	240 min
Data saving period (s)	2 s	10 s	40 s	60 s	120 s	480 s
Sampling time	41 h	8 days	34 days	52 days	104 days	416 days

Only event data file (approx.)

Data saving period	125ms	500ms	1 s	5 s	30 s	120 s
Sampling time	4.2 h	16 h	33 h	6 days	41 days	166 days

Display data file + Event data file

Display data file (approx.)

Waveform span rate (min/div)	1 min	5 min	20 min	30 min	60 min	240 min
Data saving period (s)	2 s	10 s	40 s	60 s	120 s	480 s
Sampling time	31 h	6 days	26 days	39 days	78 days	312 days

Event data file (approx.)

Data saving period	125ms	500ms	1 s	5 s	30 s	120 s
Sampling time	1 h	4.2 h	8.3 h	41 h	10 days	41 days

In case measurement ch = 8 ch, mathematical ch = 0 ch

Only display data file (approx.)

Waveform span rate (min/div)	1 min	5 min	20 min	30 min	60 min	240 min
Data saving period (s)	2 s	10 s	40 s	60 s	120 s	480 s
Sampling time	20 h	4 days	17 days	26 days	52 days	208 days

Only event data file (approx.)

Data saving period	1 s	5 s	10 s	30 s	60 s	120 s
Sampling time	20 h	4 days	8 days	26 days	52 days	104 days

Display data file + Event data file

Display data file (approx.)

Waveform span rate (min/div)	1 min	5 min	20 min	30 min	60 min	240 min
Data saving period (s)	2 s	10 s	40 s	60 s	120 s	480 s
Sampling time	15 h	3 days	13 days	19 days	39 days	117 days

Event data file (approx.)

Data saving period	1 s	5 s	10 s	30 s	60 s	120 s
Sampling time	5 h	26 h	2 days	6 days	13 days	26 days

Display update interval

Waveform span rate	Circular [Time/rev]	T-Y [Time/div]
2 sec	1 h	1 min/div
4	2	2
10	6	5
20	8	10
20	12	10
40	16	20
1 min	1 day	30
2	2	1 hour/div
4	1 week	2
8	2	4
20	4	10

Manual sample data :

Trigger : Key operation or remote contact

Data format :

ASCII

Max. number of data :

50 data

TLOG data (only for MATH option) :

Trigger : Time up of TLOG interval

Report data (only for MATH option) :

Types : Hourly, daily, Hourly + daily, daily + monthly and daily + weekly

Data format :

ASCII

Trigger function :

Event file : Selectable from FREE, TRIG or ROTATE

Display data file + Event file :

Selectable from TRIG or ROTATE

Display hard copy :

Trigger : Key operation

Data format :

png format

Output : External memory medium or communication interface

Alarm Function

Number of alarm levels :

Up to four levels for each channel

Alarm types :

High and low limits, differential high and low limits, high and low rate-of-change limits and delay high and low

Alarm delay time :

1 to 3600 s

Interval time of rate-of-change alarms :

The measurement interval times 1 to 15

Display :

The alarm status (type) is displayed in the digital value display area upon occurrence of an alarm. A common alarm indication is also displayed. The alarming behavior: non-hold or hold-type can be selectable for common to all channels.

Hysteresis :

On (0.5% of display span)/off selectable (common to all channels and alarm levels)

Outputs :

Number of points :

2, 4, 6, 12 or 24 points (optional)

Relay action :

Energized/deenergized and hold/non-hold selectable.

Memory : The times of alarm occurrences/recoveries, alarm types, etc. are stored in the memory.

(Up to 120 latest alarm events are stored.)

Communication Functions

Connection :

Ethernet (10BASE-T)

Protocols : SMTP, HTTP1.0, FTP, TCP, UDP, IP, ARP, ICMP

E-mail inform function :

Recipient address :

2 address groups (plural address can be put within 150 words in each groups)

Kinds of inform :

the following information can be informed by E-mail, selectable from inform/misinform for each group

Alarm inform :

inform in occurring alarm/canceling alarm



Common mode noise voltage (50/60 Hz) :  
 250 Vrms AC or less for all ranges  
 Maximum noise voltage between channels (50/60 Hz) :  
 250 Vrms AC or less

Mounting position :  
 Can be inclined up to 30 deg backward.  
 Mounting at an angle away from the  
 perpendicular is not acceptable.

Warm-up time :  
 At least 30 min after power on

**Standard Performance**

Measuring and Recording Accuracy :  
 The following specifications apply to operation of the recorder under standard operation conditions.  
 Temperature : 23 ± 2°C  
 Humidity : 55% ± 10% RH  
 Power supply voltage : 90 to 132 or 180 to 250 VAC  
 Power supply frequency : 50/60 Hz ± 1%  
 Warm-up time : At least 30 min.

Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Range	Measurement accuracy (digital display)	Max. resolution of digital display
DCV	20 mV	±(0.1% of rdg + 2 digits)	10 µV
	60 mV		10 µV
	200 mV		100 µV
	2 V		1 mV
	6 V		1 mV
	20 V		10 mV
	50 V	±(0.1% of rdg + 3 digits)	10 mV
TC (Excluding the reference junction compensation accuracy)	R	±(0.15% of rdg + 1°C) However, R, S : ±3.7°C at 0 to 100°C, ±1.5°C at 100 to 300°C	0.1°C
	S	B : ±2°C at 400 to 600°C (Accuracy at less than 400°C is not guaranteed.)	
	B	±(0.15% of rdg + 0.7°C) However, ±(0.15% of rdg + 1°C) at -200 to -100°C	
	K	±(0.15% of rdg + 0.5°C)	
	E	±(0.15% of rdg + 0.7°C) at -200 to -100°C	
	J	±(0.15% of rdg + 0.7°C)	
	T	±(0.15% of rdg + 0.7°C)	
	N	±(0.15% of rdg + 0.7°C)	
	W	±(0.15% of rdg + 1°C)	
	L	±(0.15% of rdg + 0.5°C)	
U	However, ±(0.15% of rdg + 0.7°C) at -200 to 100°C		
RTD	Pt100	±(0.15% of rdg + 0.3°C)	
	JPt100		

Measurement accuracy in case of scaling (digits) :  
 = measurement accuracy (digits) x scaling span (digits)/measurement span (digits) + 2 digits  
 Decimals are rounded off to the next highest number.  
 Reference junction compensation :  
 INT (internal)/EXT (external) selectable (common for all channels)  
 Reference junction compensation accuracy (above 0°C) :  
 Types R, S, B, W : ±1°C  
 Types K, J, E, T, N, L, U : ±0.5°C  
 Maximum allowable input voltage :  
 ±10 VDC (continuous) for less than 2 VDC ranges and TC ranges  
 ±60 VDC (continuous) for more than 6 VDC ranges  
 Input resistance :  
 Approximately 10 MΩ or more for DCV ranges of 2 VDC or less and TC  
 Approximately 1 MΩ for more than 6 VDC ranges

Input source resistance :  
 DCV, TC : 2 kΩ or less  
 RTD : 10 Ω or less per wire (The resistance of all three wires must be equal.)  
 Input bias current :  
 10 nA or less  
 Maximum common mode noise voltage :  
 250 Vrms AC (50/60 Hz)  
 Maximum noise voltage between channels :  
 250 Vrms AC (50/60 Hz)  
 Interference between channels :  
 120 dB (when the input source resistance is 500 Ω and the inputs to other channels are 30 V)  
 Common mode rejection ratio :  
 120 dB (50/60 Hz ± 0.1%, 500 Ω imbalance between the minus terminal and ground)  
 Normal mode rejection ratio :  
 40 dB (50/60 Hz ± 0.1%)

**Effects of Operating Conditions**

Ambient temperature :

With temperature variation of 10°C :

 $\pm(0.1\% \text{ of rdg} + 1 \text{ digit})$  or less

Excluding the error of reference junction compensation

For RTD inputs :

 $\pm(0.1\% \text{ of rdg} + 2 \text{ digits})$  or less

Power supply :

With variation within 90 to 132 V and 180 to 250 VAC (50/60 Hz) :

 $\pm 1$  digit or lessWith variation of  $\pm 2$  Hz from rated power frequency (at 100 VAC) : $\pm(0.1\% \text{ of rdg} + 1 \text{ digit})$  or less

Magnetic field :

AC (50/60 Hz) and DC 400 A/m fields :

 $\pm(0.1\% \text{ of rdg} + 10 \text{ digits})$  or less

Input source resistance :

(1) DCV range

With variation of  $+1 \text{ k}\Omega$  :Ranges of 2 V or less : within  $\pm 10 \mu\text{V}$ 

Ranges of 6 V or greater :

 $-0.1\% \text{ of rdg}$  or less

(2) TC range

With variation of  $+1 \text{ k}\Omega$  :Within  $\pm 10 \mu\text{V}$  ( $\pm 100 \mu\text{V}$  when the burnout upscale/downscale function is switched on)

(3) RTD range (Pt100)

With variation of  $10 \Omega$  per wire (resistance of all three wires must be equal) : $\pm(0.1\% \text{ of rdg} + 1 \text{ digit})$  or lessWith maximum difference of  $40 \text{ m}\Omega$  between wires :approximately  $\pm 0.1^\circ\text{C}$ **Transport and Storage Conditions**

The following specifies the environmental conditions required during transportation from shipment to the start of service and during storage as well as during transportation and storage if this instrument is temporarily taken out of service.

No malfunction will occur under these conditions without serious damage, which is absolutely impossible to repair; however, calibration may be necessary to recover normal operation performance.

Ambient temperature :

 $-25^\circ\text{C}$  to  $60^\circ\text{C}$ 

Humidity :

5% to 95% RH (No condensation is allowed.)

Vibration :

10 to 60 Hz,  $4.9 \text{ m/s}^2$  maximum

Shock :

 $392 \text{ m/s}^2$  maximum (while being packed)**SPECIFICATIONS OF OPTIONAL FUNCTIONS****Alarm Output Relays (/AR1, /AR2, /A3, /A4, /A5) :**

An alarm signal is output from the rear panel as a relay contact signal.

/AR1 and /AR2 includes remote control functions (/R1)

Relay contact rating :

250 VDC/0.1 A (for resistance load) 250 VAC (50/60 Hz)/3 A

Terminal configuration :

SPDT (NO-C-NC). Energized-at-alarm/deenergized-at-alarm, AND/OR, and hold/non-hold actions are selectable.

**Serial Communication Interface (/C2, /C3) :**

This interface allows the host computer to control and make settings for the recorder as well as receive data from the recorder.

Connection :

EIA RS-232 (/C2) or RS-422-A/485 (/C3)

Protocols : YOKOGAWA private protocol, Modbus protocol

Synchronization method :

Start-stop asynchronous transmission

Connection method (RS-422-A/485) :

4-wire half-duplex multi-drop connection (1 : N where N = 1 to 31)

Transmission speed :

1200, 2400, 4800, 9600, 19200 or 38400 bps

Data length :

7 or 8 bits

Stop bit : 1 bit

Parity : Odd, even, or none

Communication distance (RS-422-A/485) :

Up to 1.2 km

Communication mode :

ASCII for input/output for control and setting

ASCII or binary for output of measured data

Modbus communication :

operation mode :

RTU MASTER or RTU SLAVE

RTU MASTER :

data acquisition of 8 packsets groups the continuous register that is same type of data in a slave group can be registered in a basket group

RTU SLAVE :

output of data of measurement, computation and alarm status

**FOUNDATION Fieldbus communication function (/CF1)**

The bi-directional digital communication as standard for FOUNDATION™ Fieldbus that is established by Fieldbus foundation.

Interface : FOUNDATION™ Fieldbus H1 (communication speed : 31.25 kb/s)

Physical layer type :

113 (standard-power signaling, bus powered, non I.S.)

Communication line condition :

power supply---9 to 32 VDC, current supply---16.5 mA (Max.)

Signal insulation :

communication terminal to grand terminal, dielectric strength 500 Vrms (50/60 Hz, 1 min)

Device : Link master

Function block :  
 AI block :  
     8 blocks (1 block for each channels) :  
         Transfer the data of measurement and computation of DX to other instruments  
 MAI block :  
     1 block (8 channels) :  
         Transfer the data of measurement and computation of DX to other instruments  
 MAO block :  
     1 block (8 channels) :  
         Display and record the data of other instruments

**VGA Video Output (/D5) :**

Resolution :  
     640 x 480 pixels (VGA)  
 Connector : 15 pins D-SUB (DB15HD)

**Fail/Memory End Output (/F1) :**

The relay contact output on the rear panel indicates the occurrence of a system error and the time specified until end of memory before the data in a continuously storing file are overwritten.

Manual save mode:  
     relay output before the specified time of starting overwriting inside memory (selectable from 1, 2, 5, 10, 20, 50, or 100 hours)  
 Auto save mode:  
     relay output when the amount of memory media reaches 90%  
 Relay contact rating :  
     250 VDC/0.1 A (for resistance load)  
     250 VAC (50/60 Hz)/3 A

**Clamped Input Terminal (/H2) :**

Clamped input terminal is used for input terminal.

**Desk Top Type (/H5 [ ], /H5) :**

Provides carrying handle and power cord.  
 \* In case that /P1 is specified together, /H5 must be specified. Power terminal will be screw type and power code will not be provided.

**Mathematical Functions (/M1) :**

Used for calculating data, displaying trends and digital values, and recording calculated data assigned to channels.

Channel assignable to calculated data :  
 DX204C, DX208C :  
     Up to 8 channels

Operation :  
 General arithmetic operations :  
     Four arithmetic operations, square root, absolute, common logarithm, exponential, power, relational operations (>, ≥, <, ≤, =, ≠), logic operations (AND, OR, NOT, XOR)

Statistical operations :  
     Average, maximum, minimum and summation

Special operations :  
     Long term rolling average

Constant :  
     Available (Up to 30 constants)

Digital data input via communication :  
     Digital data via communication can be used in mathematical expression (Up to 30 data)

Remote status input :  
     Remote input status (0/1) can be used in mathematical expression (Up to 8 inputs)

Report functions :  
 Report type :  
     Hourly, daily, daily + monthly and daily + weekly  
 Operation : Average, maximum, minimum and summation  
 Data format :  
     ASCII

**Cu10, Cu25 RTD Input /3 leg isolated RTD Input (/N1) :**

This option allows Cu10 and Cu25 inputs to be added to the standard input types.

Input type		Measuring range
RTD (measurement current : i = 1.5 mA)	Cu10 (GE)	-200 to 300°C
	Cu10 (L&N)	
	Cu10 (WEED)	
	Cu10 (BAILEY)	
	Cu10 : α = 0.00392 at 20°C	
	Cu10 : α = 0.00393 at 20°C	
	Cu25 : α = 0.00425 at 0°C	

Input type	Accuracy guaranteed range	Measurement accuracy
Cu10 (GE)	-70 to 170°C	±(0.4% of rdg + 1.0°C)
Cu10 (L&N)	-75 to 150°C	
Cu10 (WEED)	-200 to 260°C	
Cu10 (BAILEY)	-200 to 300°C	±(0.3% of rdg + 0.8°C)
Cu10 : α = 0.00392 at 20°C		
Cu10 : α = 0.00393 at 20°C		
Cu25 : α = 0.00425 at 0°C		

\* In case that /N1 is specified, the measurement accuracy of Pt100/JPt100 RTD input will be ;  
 ±(0.3% of rdg + 0.6°C)

**24 VDC/AC Power Supply (/P1) :**

Rated power supply :  
     24 VDC/AC  
 Allowable power supply voltage range :  
     21.6 to 26.4 VDC/AC  
 Dielectric strength :  
     Power supply to ground terminal :  
         500 VAC  
 Power Consumption :

Supply voltage	LCD save mode	Normal	Max.
24 VDC	34 VA	35 VA	54 VA
24 VAC (50/60 Hz)	50 VA	53 VA	76 VA

**Remote Control (/R1) :**

This option allows the following eight functions to be controlled remotely by a contact input :

- Start/stop of memory (level)
- Trigger for event file (trigger, 250 ms or longer)
- Time adjustment (adjusting the time to a preset time upon contact signal, trigger, 250 ms or longer)

Time of trigger-on	Processing
hh:00:00 to hh:01:59	Cut off reading of less than one minute. e.g. 10:00:50 is corrected as 10:00:00
hh:58:00 to hh:59:59	Round up reading of less than one minute. e.g. 10:59:50 is corrected as 11:00:00
hh:02:00 to hh:57:59	No process is to be performed.



- Start/stop of computation (level)
- Reset of computation data (trigger, 250 ms or longer)
- Manual data sample (trigger, 250 ms or longer)
- Message display (Up to 8 different messages can be set, trigger, 250 ms or longer)
- Load of setting parameters (Up to 3 settings can be set, trigger, 250 ms or longer)
- Alarm acknowledgement (trigger, 250 ms or longer)
- Snapshot (trigger, 250 ms or longer)

**Batch Function (BT1) :**

Batch number function are available.

Batch number function :

Batch number (max. 16 characters + 4 figures lot number) and comment (max. 32 characters x 3 lines) can be set in the operation mode.

Auto increment of serial number by each batch start is available.

Pre-set application name, supervisor name and manager name can be referred in the batch number entry display.

Data file :

Following information are added to the display/event data file as headers.

- User name
- Application name
- Supervisor name
- Manager name
- Batch number
- comment

**24 VDC transmitter power supply (TPS2, /TPS4)**

Output voltage :

22.8 to 25.2 VDC (rated load current)

Rated output current :

4 to 20 mADC

Max. output current :

25 mADC (current to guard operation against overcurrent : approx. 68 mADC)

Allowable conductor resistance :

$RL \leq (17.8 - \text{transmitter minimum operation voltage})/0.02 \text{ A}$   
(not include drop voltage with load shunt resistance)

Max. length of wiring :

2 km (CEV cable)

Insulation resistance :

output terminal to grand terminal more than 20 M $\Omega$  (500 VDC)

Dielectric strength :

output terminal to grand terminal

500 VAC (50/60 Hz, I = 10 mA), 1 min

Within output terminal

500 VAC (50/60 Hz, I = 10 mA), 1 min

**APPLICATION SOFTWARE****DAQSTANDARD**

Operating environment

OS : Microsoft Windows 98/Me/NT4.0/2000/XP

Processor :

MMX Pentium166 MHz or higher (Pentium II 266 MHz or higher recommended)

Memory :

32 MB or more  
(64 MB or more recommended)

Disk device :

CD-ROM drive that is applied to Windows 95/98/Me/NT4.0/2000

3.5" floppy disk drive (1.44 MB format)

Hard disk : Free area of at least 10 MB (100 MB or higher recommended)

Display card :

Compatible with Windows 95/98/Me/NT4.0/2000

Can display 32,000 colors or higher

(64,000 colors or higher recommended)

Printer :

A printer and printer driver compatible with Windows 95/98/Me/NT4.0/2000

Basic function (packages) :

Configuration software:

External memory medium :

configuration of setup and set mode

Configuration via communication :

configuration of setup and set mode

without communication configuration (ex. IP address)

Data viewer :

numbers of display channels :

32 channels for each group, at most 30 group

Display function :

waveform display, digital display, circular display, list display, TLOG display, report display etc.

File connection display :

connect data files that are divided because of auto-save during continuous data collecting or power failure, and then display (can connect up to total a million)

Section computation :

Max. value, Min. value, average value, effective value, p-p value

Data conversion :

File conversion to ASCII, Lotus 1-2-3 or MS-Excel format

Print out : Print out retrieved data

**MODEL AND SUFFIX CODES**

Model code	Suffix code	Optional code	Description
DX204C			DAQSTATION DX200C (4 ch)
DX208C			DAQSTATION DX200C (8 ch)
External memory	-1		FDD
	-2		100MB Zip (with medium)
	-3		ATA flash memory card (with medium : CF card + adapter)
	-5		250MB Zip (with medium)
Display language	-2		English/Germany/French, deg F & Summre/winter time (with English DX standard software)
Options		/AR1	Alarm output 2 points/Remote control <sup>*1*2</sup>
		/AR2	Alarm output 4 points/Remote control <sup>*1*2</sup>
		/A3	Alarm output 6 points <sup>*1</sup>
		/A4	Alarm output 12 points <sup>*1</sup>
		/A5	Alarm output 24 points <sup>*1*3</sup>
		/BT1	Batch function
		/C2	RS-232 interface (including Modbus Master/Slave protocol) <sup>*4*5</sup>
		/C3	RS-422-A/485 interface (including Modbus Master/Slave protocol) <sup>*4*5</sup>
		/CF1	FOUNDATION Fieldbus <sup>*4*6</sup>
		/D5	VGA video output
		/F1	Fail/memory end detection and output <sup>*3</sup>
		/H2	Clamped input terminal
		/H5	Desktop type (without power code, screw type power terminal) <sup>*7</sup>
		/H5[ ]	Desktop type (with power code) <sup>*8</sup>
		/M1	Mathematical function (with report function)
		/N1	Cu10, Cu25 RTD input/3 legs isolated RTD
		/N2	3 legs isolated RTD <sup>*9</sup>
		/P1	24 VDC/AC power supply
	/TPS4	24 VDC transmitter power supply (4 loops) <sup>*10</sup>	
	/TPS8	24 VDC transmitter power supply (8 loops) <sup>*11</sup>	
	/R1	Remote control	

- \*1 /AR1, /AR2, /A3, /A4, /A5 cannot be specified together.
- \*2 If /AR1 or /AR2 is specified, /R1 cannot be specified.
- \*3 If /A5 is specified, /F1 cannot be specified.
- \*4 /C2, /C3, and /CF1 cannot be specified together.
- \*5 In case that Modbus master function is utilized, /M1 must be specified.
- \*6 In case that FOUNDATION Fieldbus (/CF1) is specified, /M1 must be specified together.
- \*7 In case that 24 VDC/AC power supply (/P1) and desktop type are specified together, /H5 must be specified.  
/P1 and /H5[ ] cannot be specified together.
- \*8 /H5[ ]
  - D ..... Power cord UL, CSA st'd
  - F ..... Power cord VDE st'd
  - R ..... Power cord SAA st'd
  - J ..... Power cord BS st'd
  - H ..... Power cord GB st'd
- \*9 /N2 cannot be specified for DX204C, DX208C
- \*10 In case that /TPS4 is specified, /TPS8 or /A5 cannot be specified.
- \*11 In case that /TPS8 is specified, /TPS4 or /A5 cannot be specified.  
In case that /TPS8 is specified, /F1 and /A4 cannot be specified together.

**Application Software**

Model	Description	Operating System
DXA100-02	DAQSTANDARD	Windows 98/Me/NT4.0/2000/XP
WX104/CD1	DAQEXPLORER	Windows 98/Me/NT4.0/2000/XP
DXA310-021	DAQ-PharmBio	Windows 98/Me/NT4.0/2000/XP
DXA410-02	DAQOPC (Basic)	Windows NT4.0/2000
DXA410-04	DAQOPC (Advanced)	Windows NT4.0/2000
WX101/CD1	DAQLOGGER (1600 channels)	Windows 98/NT4.0/2000/XP
WX81/CD1	DAQLOGGER Client (1600 channels)	Windows 98/NT4.0/2000/XP

## ■ STANDARD ACCESSORIES

Item (s)	Quantity
Mounting brackets	2
Fuse	1
Terminal screws	5
Instruction manual	1
Zip disk (100 MB)	1* <sup>1</sup>
Zip disk (250 MB)	1* <sup>2</sup>
PCMCIA ATA flash memory card (CF card + adapter)	1* <sup>3</sup>

\*1 : Only for DX2[ ] [ ]C-2 model

\*2 : Only for DX2[ ] [ ]C-5 model


\*3 : Only for DX2[ ] [ ]C-3 model

## ■ OPTIONAL ACCESSORIES

Item (s)	Model (part) number	Specification
Shunt resistors (for screw input terminal)	415920	250 $\Omega \pm 0.1\%$
	415921	100 $\Omega \pm 0.1\%$
	415922	10 $\Omega \pm 0.1\%$
Shunt resistors (for clamped input terminal, /H2)	438920	250 $\Omega \pm 0.1\%$
	438921	100 $\Omega \pm 0.1\%$
	438922	10 $\Omega \pm 0.1\%$
3.5-inch floppy disks	705900	2HD (10 disks)
Zip disk	A1053MP	100 MB
	A1056MP	250 MB
Card adapter (not including CF card)	B9968NN	—
CF card (not including adapter)	B9968NM	32 MB
	B9969NP	64 MB
	B9970NQ	128 MB
	B9971NR	256 MB
	B9972NS	512 MB
Fuse	A1423EF	250 V, 1.25 A TL
	A1463EF	250 V, 6.3 A TL (for /P1)
Mounting bracket	B9900BX	—
Attached and removed module handle	790581	—




**■ DIMENSIONS**

Dimensions

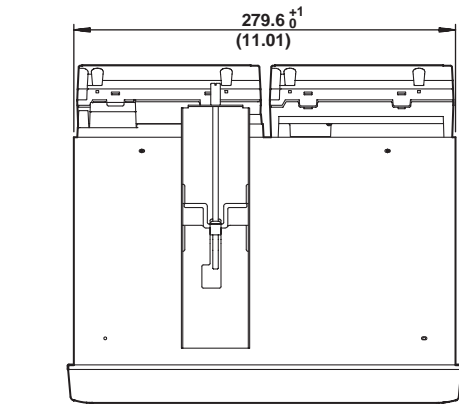


Rear View

Unit mm  
(approx. inch)

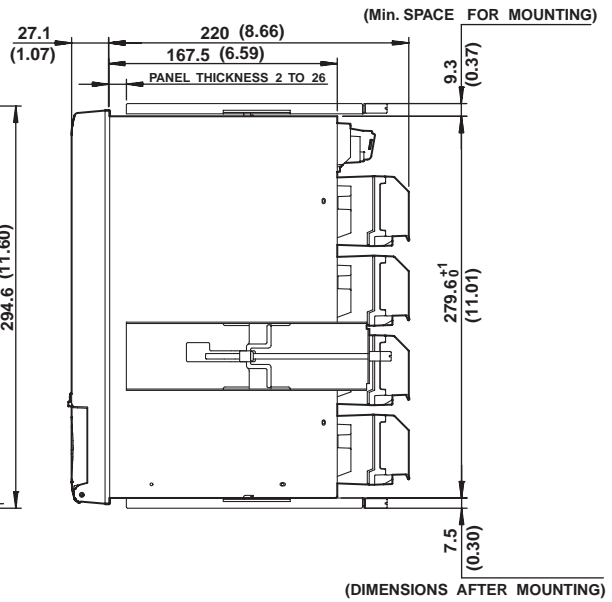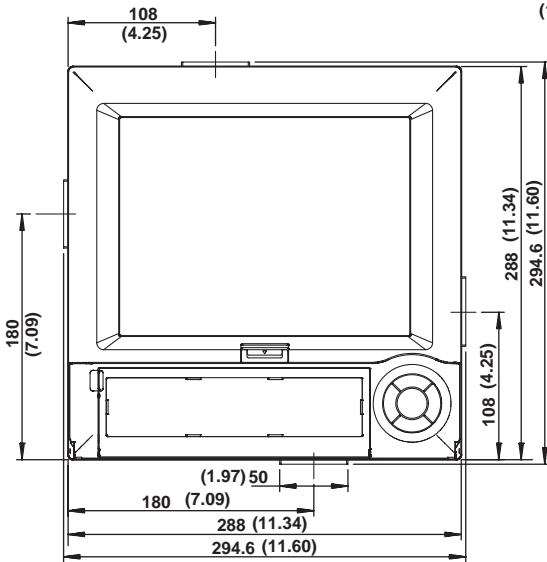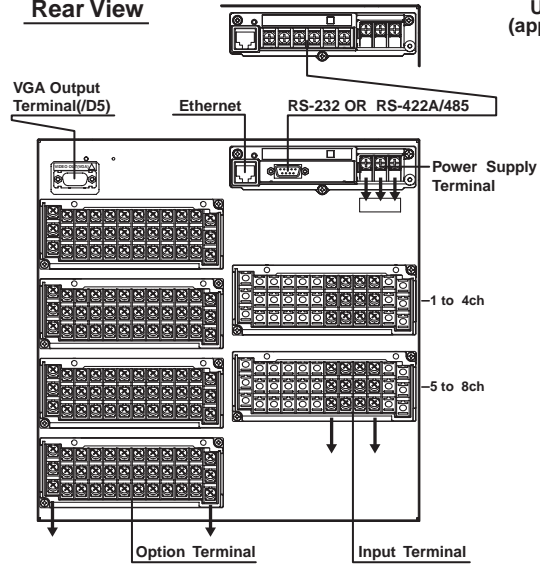



**Note :** If not specified, the tolerance is  $\pm 3\%$ .  
However, for dimensions less than 10 mm, the tolerance is  $\pm 0.3$  mm.

**Panel Cutout**


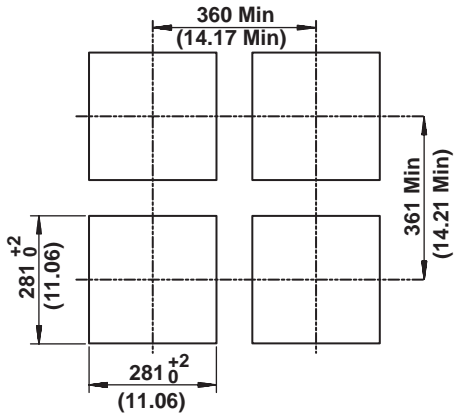


Unit : mm  
(approx. inch)

**Desk-top type**

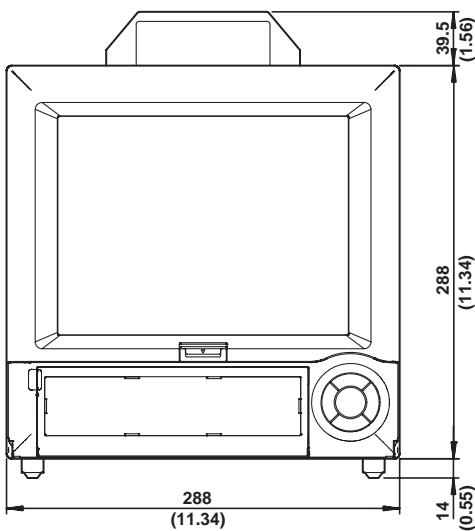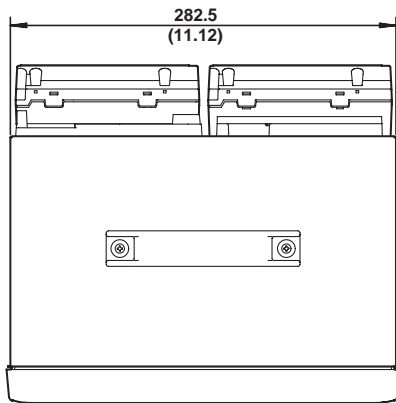


**Rear View**

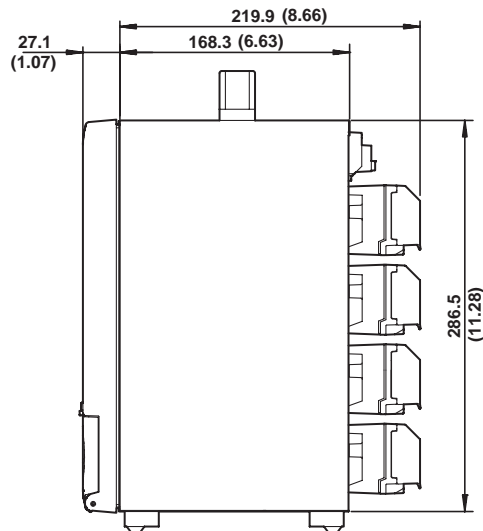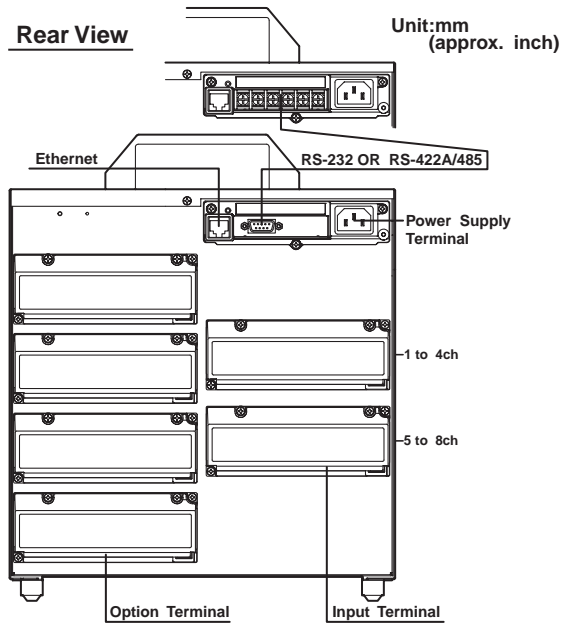

**Note : If not specified, the tolerance is ±3%.  
However, for dimensions less than 10 mm, the tolerance is ±0.3 mm.**




**Power Supply Terminal**



**RS-422-A/485 Terminal**



**RS-232 Terminal**




1	N.C.
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	N.C.

**FOUNDATION Fieldbus Terminal**




**Input Terminals**

DX204C, DX208C Screw-On Terminals

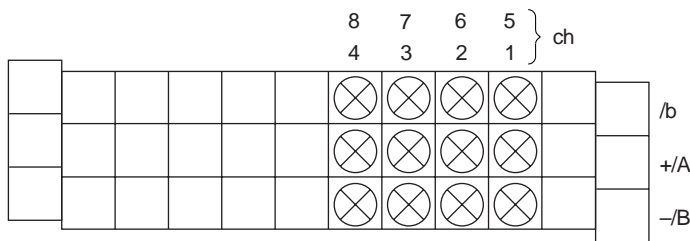


DX204C, DX208C Clamped Terminals (/H2)

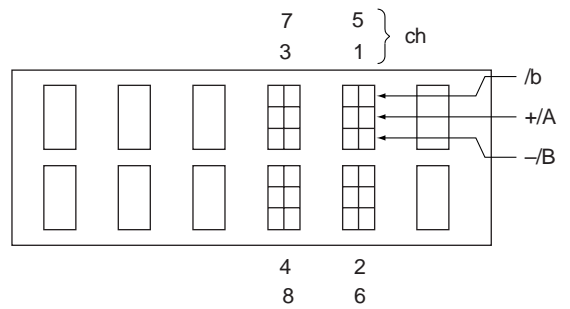


## Option Terminals


### /A3/R1 Combination

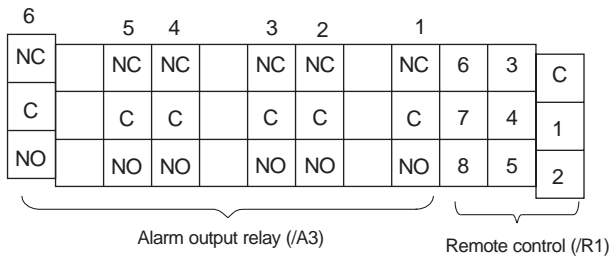


### /A2/F1/R1 Combination

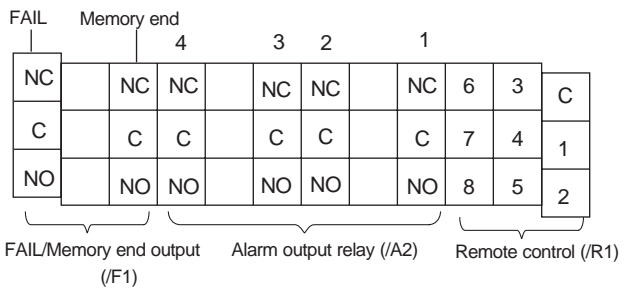


### /A5/R1 Combination

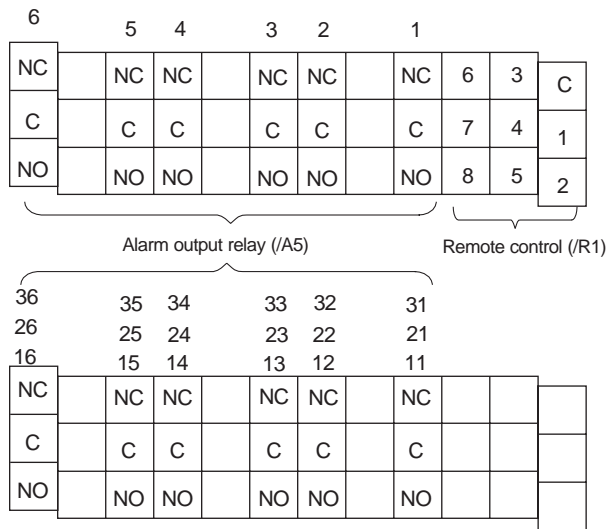

### /A4/F1/R1 Combination

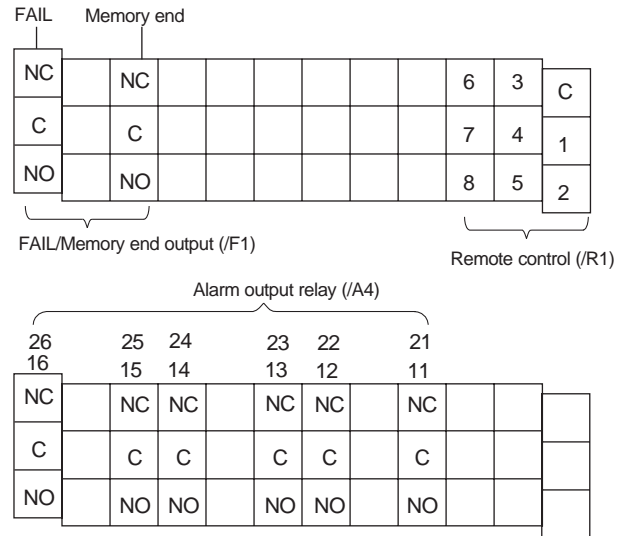

### /TPS4, /TPS8 Combination

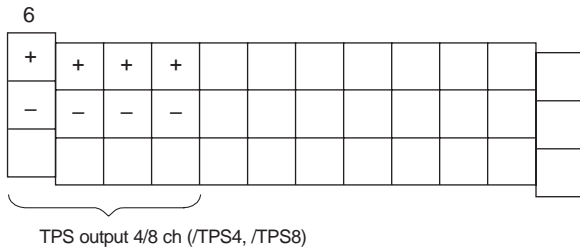

The TCP/IP software used in this product and the document for that TCP/IP software are based in part on BSD networking software, Release 1 licensed from The Regents of the University of California.

- Microsoft, MS and Windows are registered trademarks of Microsoft Corporation USA.
- Lotus and 1-2-3 are registered trademark of Lotus Development Corporation.
- MMX and Pentium are registered trademarks of Intel Corporation.
- Ethernet is a registered trademark of XEROX Corporation.
- Modbus is a registered trademark of AEG Schneider.
- The Logo mark of FOUNDATION™ Fieldbus and Fieldbus foundation are registered trademark of Fieldbus foundation
- Zip is a registered trademark of Iomega Corporation USA.
- Other company and/or product names are registered trade mark of their manufactures.