

# General Specifications

Models WG1A, WG1V  
PT Converter (RMS)

**JUXTA**


GS 77J09G01-01E

## General

The WG1A/WG1V is a compact, front terminal connection type PT converter that converts AC voltage signals into isolated DC current or DC voltage signals.

- AC/DC conversion is made by root mean square value.
- Dual output specifications are available upon requests

## Model and Suffix Codes

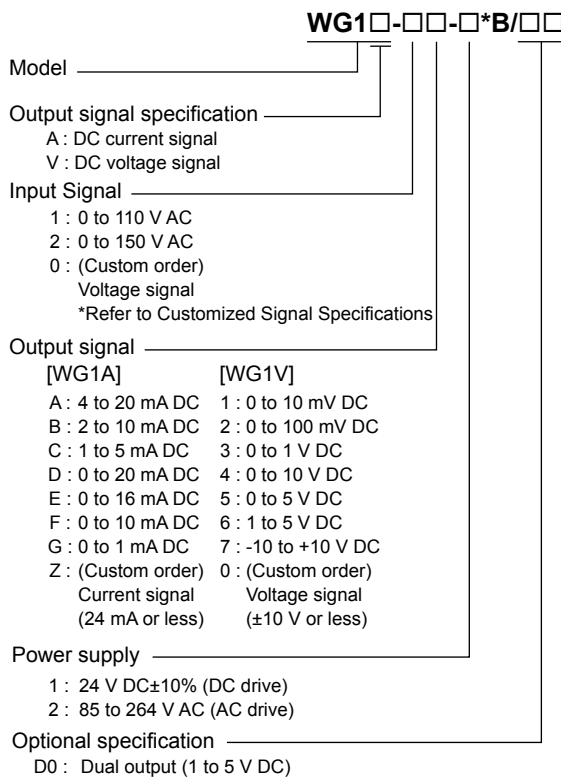


## Ordering Information

Specify the following when ordering.

- Model and suffix codes :e.g. WG1V-16-2\*B

## Input/Output Specifications

Input signal: 0 to 110 V AC or 0 to 150 V AC  
 Input loss: 0.5 VA or less  
 Input frequency range: 40 Hz to 10 kHz  
 Maximum allowable input: 120% (continuous);  
 200% (one minute)  
 Output signal: DC current or DC voltage signal

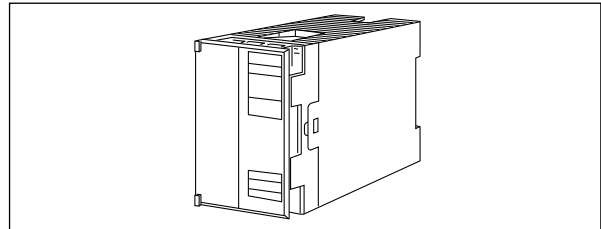

Allowable load resistance:

DC current output	Allowable load resistance	DC voltage output	Allowable load resistance
4 to 20 mA	750 Ω or less	0 to 10 mV	250 kΩ or more
2 to 10 mA	1500 Ω or less	0 to 100 mV	250 kΩ or more
1 to 5 mA	3000 Ω or less	0 to 1 V	2 kΩ or more
0 to 20 mA	750 Ω or less	0 to 10 V	10 kΩ or more
0 to 16 mA	900 Ω or less	0 to 5 V	2 kΩ or more
0 to 10 mA	1500 Ω or less	1 to 5 V	2 kΩ or more
0 to 1 mA	15 kΩ or less	-10 to 10 V	10 kΩ or more

Zero adjustment: -5 to 5%

Span adjustment: 95 to 105%

## Standard Performance

Accuracy rating: ±0.2% of span

Accuracy is not guaranteed for output level less than 0.5% of the span of a 0 to X mA output range type.

Dual output (optional): Relative error between output 1 and 2 is within ±0.2%. These outputs are not insulated.

Response speed: 170 ms, 63% response (10 to 90%)

Insulation resistance: 100 MΩ or more at 500 V

DC between input and output, input and power supply, input and ground, output and power supply, output and ground, and power supply and ground.

Withstand voltage:

DC drive 2600 V AC/min. between input and (output and power supply).

500 V AC/min. between output and power supply.

AC drive 2600 V AC/min. between input and (output, power supply and ground).

1500 V AC/min. output and power supply, power supply and ground, and output and ground.

## Environmental Conditions

Operating temperature range: 0 to 50°C

Operating humidity range: 5 to 90% RH (no condensation)

Power supply voltage: 85 to 264 V AC, 47 to 63Hz or 24 V DC±10%

Effect of power supply voltage fluctuations: ±0.1% of span or less for fluctuation within the operating range of power supply voltage specification.

Effect of ambient temperature change:  $\pm 0.2\%$  of span or less for a temperature change of  $10^{\circ}\text{C}$ .

Current consumption:  
24 V DC 90 mA (WG1A), 60 mA (WG1V)

Power consumption:  
100 V AC 7 VA (WG1A), 6 VA (WG1V)

### ■ Mounting and Dimensions

Material: ABS resin (Case body)  
Mounting method: Rack, Wall or DIN rail mounting  
Connection method: M4 screw terminals  
External dimensions: 72 (H)  $\times$  48 (W)  $\times$  127 (D) mm  
Weight: DC; Approx.150g, AC; Approx.300g


### ■ Standard Accessories

Tag number label: 1  
Mounting block: 2  
Mounting screw: M4 screw  $\times$  4

### ■ Custom Order Specifications

	Current signal	Voltage signal
Input range (AC)	-----	0 to 300 V
Span (AC)	-----	30 to 300 V
Zero elevation	-----	0% only
Output range (DC)	0 to 24 mA	-10 to +10 V
Span (DC)	1 to 24 mA	10 mV to 20 V
Zero elevation	0 to 200%	-100 to +200%

### ■ Terminal Assignments




7	Input	(V)
8	Input	( $\pm$ )
9	Output 2	(+)
10	Output 2	(-)
11	Output 1	(+)
12	Output 1	(-)
14	Supply	(L+)
15	Supply	(N-)
16	Ground	(GND)*

\*: Use for AC power supply only

Terminals 9—10 are used for Output 2 in case dual output is specified.

### ■ Block Diagram

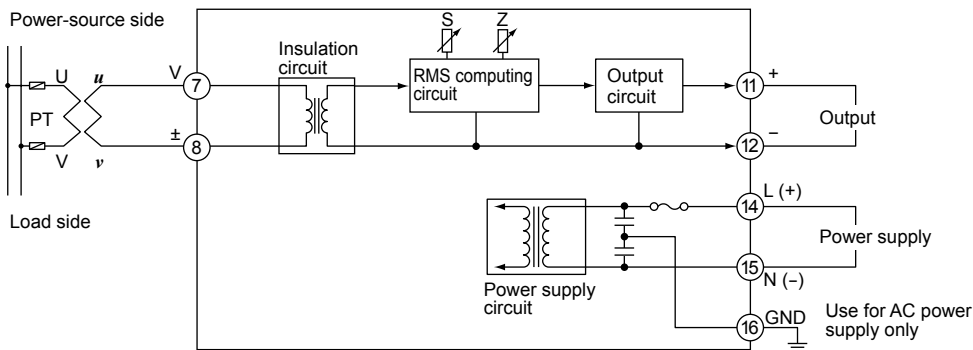

### ■ External Dimensions

