

Please make the following alterations to the User's Manual IM760101-01E (see underlined text).


### ■ Page iii “Power cord”

	Suffix Code	Description
Power cord	.....	.....
	-R	AS Standard Power Cord (Part No. : A1024WD) [Maximum rated voltage : 250 V, Maximum rated current : 10 A]
	-H	GB Standard Power Cord (complies with the CCC)(Part No.: A1064WD) [Maximum rated voltage : 250 V, Maximum rated current : 10 A]

### ■ Page iv “Standard Accessories”

Part Name	Part Number	Q'ty	Notes
.....	.....	.....	.....
2.Spare power fuse	<u>A1463EF</u>	1	250 V, 6.3 A, time lag (attached to the fuse holder)
.....	.....	.....	.....

1. (One of the following power cords is supplied according to the instrument's suffix codes.)

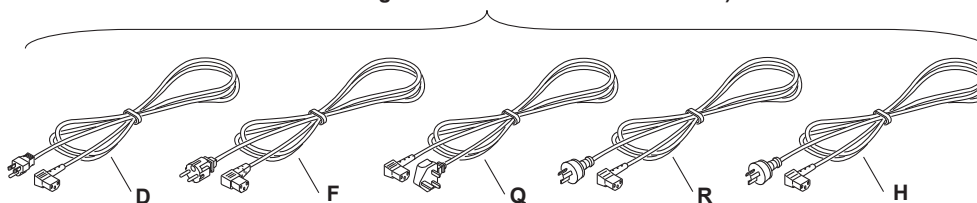

### ■ Page v “Spare Parts (Sold Separately)”

Part Name	Part Number	Q'ty	Notes
.....	.....	.....	.....
2.Power fuse	<u>A1463EF</u>	2	250 V, 6.3 A, time lag

### ■ Page 3-11, 3-15, 3-18 “Note”

#### Note

- For the relationship between the wiring systems and the method of determining the measured values or computed values, see Appendix 1, “Symbols and Determination of Measurement Functions.”
- In 3P3W and 3V3A systems, the wiring system may be different between the WT1600 and another product (another digital power meter) due to the differences in the input element that is wired. To achieve correct measurements, check the wiring system.

**Effective Power Range of the Wiring Unit of Wiring System Each Element**

Current Range [A]	Voltage Range [V]											
	1.5000	3.0000	6.0000	10.000	15.000	30.000	60.000	100.00	150.00	300.00	600.00	1000.0
10.000m	15.000 mW	30.000 mW	60.000 mW	100.00 mW	150.00 mW	300.00 mW	600.00 mW	1.0000 W	1.5000 W	3.0000 W	6.0000 W	10.000 W
20.000m	30.000 mW	60.000 mW	120.00 mW	200.00 mW	300.00 mW	600.00 mW	1.2000 W	2.0000 W	3.0000 W	6.0000 W	12.000 W	20.000 W
50.000m	75.000 mW	150.00 mW	300.00 mW	500.00 mW	<u>0.7500 W</u>	1.5000 W	3.0000 W	5.0000 W	7.500 W	15.000 W	30.000 W	50.000 W
100.00m	150.00 mW	300.00 mW	600.00 mW	1.0000 W	1.5000 W	3.0000 W	6.0000 W	10.000 W	15.000 W	30.000 W	60.000 W	100.00 W
200.00m	300.00 mW	600.00 mW	1.2000 W	2.0000 W	3.0000 W	6.0000 W	12.000 W	20.000 W	30.000 W	60.000 W	120.00 W	200.00 W
500.00m	<u>0.7500 W</u>	1.5000 W	3.0000 W	5.0000 W	7.500 W	15.000 W	30.000 W	50.000 W	75.00 W	150.00 W	300.00 W	500.00 W
1.0000	1.5000 W	3.0000 W	6.0000 W	10.000 W	15.000 W	30.000 W	60.000 W	100.00 W	150.00 W	300.00 W	600.00 W	1.0000 kW
2.0000	3.0000 W	6.0000 W	12.000 W	20.000 W	30.000 W	60.000 W	120.00 W	200.00 W	300.00 W	600.00 W	1.2000 kW	2.0000 kW
5.0000	7.500 W	15.000 W	30.000 W	50.000 W	75.00 W	150.00 W	300.00 W	500.00 W	<u>0.7500 kW</u>	1.5000 kW	3.0000 kW	5.0000 kW
10.000	15.000 W	30.000 W	60.000 W	100.00 W	150.00 W	300.00 W	600.00 W	1.0000 kW	1.5000 kW	3.0000 kW	6.0000 kW	10.000 kW
20.000	30.000 W	60.000 W	120.00 W	200.00 W	300.00 W	600.00 W	1.2000 kW	2.0000 kW	3.0000 kW	6.0000 kW	12.000 kW	20.000 kW
50.000	75.00 W	150.00 W	300.00 W	500.00 W	<u>0.7500 kW</u>	1.5000 kW	3.0000 kW	5.0000 kW	7.500 kW	15.000 kW	30.000 kW	50.000 kW

**Effective Power Range of the Wiring Unit of Wiring System 1P2W**

Current Range [A]	Voltage Range [V]											
	1.5000	3.0000	6.0000	10.000	15.000	30.000	60.000	100.00	150.00	300.00	600.00	1000.0
10.000m	15.000 mW	30.000 mW	60.000 mW	100.00 mW	150.00 mW	300.00 mW	600.00 mW	1.0000 W	1.5000 W	3.0000 W	6.0000 W	10.000 W
20.000m	30.000 mW	60.000 mW	120.00 mW	200.00 mW	300.00 mW	600.00 mW	1.2000 W	2.0000 W	3.0000 W	6.0000 W	12.000 W	20.000 W
50.000m	<u>75.000 mW</u>	150.00 mW	300.00 mW	500.00 mW	<u>750.00 mW</u>	1.5000 W	3.0000 W	5.0000 W	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W
100.00m	150.00 mW	300.00 mW	600.00 mW	1.0000 W	1.5000 W	3.0000 W	6.0000 W	10.000 W	15.000 W	30.000 W	60.000 W	100.00 W
200.00m	300.00 mW	600.00 mW	1.2000 W	2.0000 W	3.0000 W	6.0000 W	12.000 W	20.000 W	30.000 W	60.000 W	120.00 W	200.00 W
500.00m	<u>750.00 mW</u>	1.5000 W	3.0000 W	5.0000 W	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W	<u>75.000 W</u>	150.00 W	300.00 W	500.00 W
1.0000	1.5000 W	3.0000 W	6.0000 W	10.000 W	15.000 W	30.000 W	60.000 W	100.00 W	150.00 W	300.00 W	600.00 W	1.0000 kW
2.0000	3.0000 W	6.0000 W	12.000 W	20.000 W	30.000 W	60.000 W	120.00 W	200.00 W	300.00 W	600.00 W	1.2000 kW	2.0000 kW
5.0000	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W	<u>75.000 W</u>	150.00 W	300.00 W	500.00 W	<u>750.00 W</u>	1.5000 kW	3.0000 kW	5.0000 kW
10.000	15.000 W	30.000 W	60.000 W	100.00 W	150.00 W	300.00 W	600.00 W	1.0000 kW	1.5000 kW	3.0000 kW	6.0000 kW	10.000 kW
20.000	30.000 W	60.000 W	120.00 W	200.00 W	300.00 W	600.00 W	1.2000 kW	2.0000 kW	3.0000 kW	6.0000 kW	12.000 kW	20.000 kW
50.000	<u>75.000 W</u>	150.00 W	300.00 W	500.00 W	<u>750.00 W</u>	1.5000 kW	3.0000 kW	5.0000 kW	<u>7.5000 kW</u>	15.000 kW	30.000 kW	50.000 kW

**Effective Power Range of the Wiring Unit of Wiring System 1P3W, 3P3W, and 3V3A**

Current Range [A]	Voltage Range [V]											
	1.5000	3.0000	6.0000	10.000	15.000	30.000	60.000	100.00	150.00	300.00	600.00	1000.0
10.000m	30.000 mW	60.000 mW	120.000 mW	200.00 mW	300.00 mW	600.00 mW	1200.00 mW	2.0000 W	3.0000 W	6.0000 W	12.0000 W	20.000 W
20.000m	60.000 mW	120.000 mW	240.00 mW	400.00 mW	600.00 mW	1200.00 mW	2.4000 W	4.0000 W	6.0000 W	12.0000 W	24.000 W	40.000 W
50.000m	<u>150.000 mW</u>	300.00 mW	600.00 mW	1000.00 mW	<u>1500.00 mW</u>	3.0000 W	6.0000 W	10.0000 W	<u>15.0000 W</u>	30.000 W	60.000 W	100.000 W
100.00m	300.00 mW	600.00 mW	1200.00 mW	2.0000 W	3.0000 W	6.0000 W	12.0000 W	20.000 W	30.000 W	60.000 W	120.000 W	200.00 W
200.00m	600.00 mW	1200.00 mW	2.4000 W	4.0000 W	6.0000 W	12.0000 W	24.000 W	40.000 W	60.000 W	120.000 W	240.00 W	400.00 W
500.00m	<u>1500.00 mW</u>	3.0000 W	6.0000 W	10.0000 W	<u>15.0000 W</u>	30.000 W	60.000 W	100.000 W	<u>150.000 W</u>	300.00 W	600.00 W	1000.00 W
1.0000	3.0000 W	6.0000 W	12.0000 W	20.000 W	30.000 W	60.000 W	120.000 W	200.00 W	300.00 W	600.00 W	1200.00 W	2.0000 kW
2.0000	6.0000 W	12.0000 W	24.000 W	40.000 W	60.000 W	120.000 W	240.00 W	400.00 W	600.00 W	1200.00 W	2.4000 kW	4.0000 kW
5.0000	<u>15.0000 W</u>	30.000 W	60.000 W	100.000 W	<u>150.000 W</u>	300.00 W	600.00 W	1000.00 W	<u>1500.00 W</u>	3.0000 kW	6.0000 kW	10.0000 kW
10.000	30.000 W	60.000 W	120.000 W	200.00 W	300.00 W	600.00 W	1200.00 W	2.0000 kW	3.0000 kW	6.0000 kW	12.0000 kW	20.000 kW
20.000	60.000 W	120.000 W	240.00 W	400.00 W	600.00 W	1200.00 W	2.4000 kW	4.0000 kW	6.0000 kW	12.0000 kW	24.000 kW	40.000 kW
50.000	<u>150.000 W</u>	300.00 W	600.00 W	1000.00 W	<u>1500.00 W</u>	3.0000 kW	6.0000 kW	10.0000 kW	<u>15.0000 kW</u>	30.000 kW	60.000 kW	100.000 kW

**Effective Power Range of the Wiring Unit of Wiring System 3P4W**

Current Range [A]	Voltage Range [V]											
	1.5000	3.0000	6.0000	10.000	15.000	30.000	60.000	100.00	150.00	300.00	600.00	1000.0
10.000m	45.000 mW	90.000 mW	180.000 mW	300.00 mW	450.00 mW	900.00 mW	1800.00 mW	3.0000 W	4.5000 W	9.0000 W	18.0000 W	30.000 W
20.000m	90.000 mW	180.000 mW	360.00 mW	600.00 mW	900.00 mW	1800.00 mW	3.6000 W	6.0000 W	9.0000 W	18.0000 W	36.000 W	60.000 W
50.000m	<u>225.000 mW</u>	450.00 mW	900.00 mW	1500.00 mW	<u>2250.00 mW</u>	4.5000 W	9.0000 W	15.0000 W	<u>22.5000 W</u>	45.000 W	90.000 W	150.000 W
100.00m	450.00 mW	900.00 mW	1800.00 mW	3.0000 W	4.5000 W	9.0000 W	18.0000 W	30.000 W	45.000 W	90.000 W	180.000 W	300.00 W
200.00m	900.00 mW	1800.00 mW	3.6000 W	6.0000 W	9.0000 W	18.0000 W	36.000 W	60.000 W	90.000 W	180.000 W	360.00 W	600.00 W
500.00m	<u>2250.00 mW</u>	4.5000 W	9.0000 W	15.0000 W	<u>22.5000 W</u>	45.000 W	90.000 W	150.000 W	<u>225.000 W</u>	450.00 W	900.00 W	1500.00 W
1.0000	4.5000 W	9.0000 W	18.0000 W	30.000 W	45.000 W	90.000 W	180.000 W	300.00 W	450.00 W	900.00 W	1800.00 W	3.0000 kW
2.0000	9.0000 W	18.0000 W	36.000 W	60.000 W	90.000 W	180.000 W	360.00 W	600.00 W	900.00 W	1800.00 W	3.6000 kW	6.0000 kW
5.0000	<u>22.5000 W</u>	45.000 W	90.000 W	150.000 W	<u>225.000 W</u>	450.00 W	900.00 W	1500.00 W	<u>2250.00 W</u>	4.5000 kW	9.0000 kW	15.0000 kW
10.000	45.000 W	90.000 W	180.000 W	300.00 W	450.00 W	900.00 W	1800.00 W	3.0000 kW	4.5000 kW	9.0000 kW	18.0000 kW	30.000 kW
20.000	90.000 W	180.000 W	360.00 W	600.00 W	900.00 W	1800.00 W	3.6000 kW	6.0000 kW	9.0000 kW	18.0000 kW	36.000 kW	60.000 kW
50.000	<u>225.000 W</u>	450.00 W	900.00 W	1500.00 W	<u>2250.00 W</u>	4.5000 kW	9.0000 kW	15.0000 kW	<u>22.5000 kW</u>	45.000 kW	90.000 kW	150.000 kW

■ Page 5-9 “When the crest factor is set to 6”

**Effective Power Range of the Wiring Unit of Wiring System Each Element**

Current Range [A]	Voltage Range [V]											
	750m	1.5000	3.0000	5.0000	7.5000	15.000	30.000	50.000	75.000	150.00	300.00	500.00
5.0000m	3.7500 mW	7.500 mW	15.000 mW	25.000 mW	37.500 mW	75.00 mW	150.00 mW	250.00 mW	375.00 mW	<u>0.7500 W</u>	1.5000 W	2.5000 W
10.000m	7.500 mW	15.000 mW	30.000 mW	50.000 mW	75.00 mW	150.00 mW	300.00 mW	500.00 mW	<u>0.7500 W</u>	1.5000 W	3.0000 W	5.0000 W
25.000m	18.750 mW	37.500 mW	75.00 mW	125.00 mW	187.50 mW	375.00 mW	<u>0.7500 W</u>	1.2500 W	1.8750 W	3.7500 W	7.500 W	12.500 W
50.000m	37.500 mW	75.00 mW	150.00 mW	250.00 mW	375.00 mW	<u>0.7500 W</u>	1.5000 W	2.5000 W	3.7500 W	7.500 W	15.000 W	25.000 W
100.00m	75.00 mW	150.00 mW	300.00 mW	500.00 mW	<u>0.7500 W</u>	1.5000 W	3.0000 W	5.0000 W	7.500 W	15.000 W	30.000 W	50.000 W
250.00m	187.50 mW	375.00 mW	<u>0.7500 W</u>	1.2500 W	1.8750 W	3.7500 W	7.500 W	12.500 W	18.750 W	37.500 W	75.00 W	125.00 W
500.00m	375.00 mW	<u>0.7500 W</u>	1.5000 W	2.5000 W	3.7500 W	7.500 W	15.000 W	25.000 W	37.500 W	75.00 W	150.00 W	250.00 W
1.0000	<u>0.7500 W</u>	1.5000 W	3.0000 W	5.0000 W	7.500 W	15.000 W	30.000 W	50.000 W	75.00 W	150.00 W	300.00 W	500.00 W
2.5000	1.8750 W	3.7500 W	7.500 W	12.500 W	18.750 W	37.500 W	75.00 W	125.00 W	187.50 W	375.00 W	<u>0.7500 kW</u>	1.2500 kW
5.0000	3.7500 W	7.500 W	15.000 W	25.000 W	37.500 W	75.00 W	150.00 W	250.00 W	375.00 W	<u>0.7500 kW</u>	1.5000 kW	2.5000 kW
10.000	7.500 W	15.000 W	30.000 W	50.000 W	75.00 W	150.00 W	300.00 W	500.00 W	<u>0.7500 kW</u>	1.5000 kW	3.0000 kW	5.0000 kW
25.000	18.750 W	37.500 W	75.00 W	125.00 W	187.50 W	375.00 W	<u>0.7500 kW</u>	1.2500 kW	1.8750 kW	3.7500 kW	7.500 kW	12.500 kW

**Effective Power Range of the Wiring Unit of Wiring System 1P2W**

Current Range [A]	Voltage Range [V]											
	750m	1.5000	3.0000	5.0000	7.5000	15.000	30.000	50.000	75.000	150.00	300.00	500.00
5.0000m	3.7500 mW	<u>7.5000 mW</u>	15.000 mW	25.000 mW	37.500 mW	<u>75.000 mW</u>	150.00 mW	250.00 mW	375.00 mW	<u>750.00 mW</u>	1.5000 W	2.5000 W
10.000m	<u>7.5000 mW</u>	15.000 mW	30.000 mW	50.000 mW	<u>75.000 mW</u>	150.00 mW	300.00 mW	500.00 mW	<u>750.00 mW</u>	1.5000 W	3.0000 W	5.0000 W
25.000m	18.750 mW	37.500 mW	<u>75.000 mW</u>	125.00 mW	187.50 mW	375.00 mW	<u>750.00 mW</u>	1.2500 W	1.8750 W	3.7500 W	<u>7.5000 W</u>	12.500 W
50.000m	37.500 mW	<u>75.000 mW</u>	150.00 mW	250.00 mW	375.00 mW	<u>750.00 mW</u>	1.5000 W	2.5000 W	3.7500 W	<u>7.5000 W</u>	15.000 W	25.000 W
100.00m	<u>75.000 mW</u>	150.00 mW	300.00 mW	500.00 mW	<u>750.00 mW</u>	1.5000 W	3.0000 W	5.0000 W	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W
250.00m	187.50 mW	375.00 mW	<u>750.00 mW</u>	1.2500 W	1.8750 W	3.7500 W	<u>7.5000 W</u>	12.500 W	18.750 W	37.500 W	<u>75.000 W</u>	125.00 W
500.00m	375.00 mW	<u>750.00 mW</u>	1.5000 W	2.5000 W	3.7500 W	7.5000 W	15.000 W	25.000 W	37.500 W	<u>75.000 W</u>	150.00 W	250.00 W
1.0000	<u>750.00 mW</u>	1.5000 W	3.0000 W	5.0000 W	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W	<u>75.000 W</u>	150.00 W	300.00 W	500.00 W
2.5000	1.8750 W	3.7500 W	<u>7.5000 W</u>	12.500 W	18.750 W	37.500 W	<u>75.000 W</u>	125.00 W	187.50 W	375.00 W	<u>750.00 W</u>	1.2500 kW
5.0000	3.7500 W	<u>7.5000 W</u>	15.000 W	25.000 W	37.500 W	<u>75.000 W</u>	150.00 W	250.00 W	375.00 W	<u>750.00 W</u>	1.5000 kW	2.5000 kW
10.000	<u>7.5000 W</u>	15.000 W	30.000 W	50.000 W	<u>75.000 W</u>	150.00 W	300.00 W	500.00 W	<u>750.00 W</u>	1.5000 kW	3.0000 kW	5.0000 kW
25.000	18.750 W	37.500 W	<u>75.000 W</u>	125.00 W	187.50 W	375.00 W	<u>750.00 W</u>	1.2500 kW	1.8750 kW	3.7500 kW	<u>7.5000 kW</u>	12.500 kW

**Effective Power Range of the Wiring Unit of Wiring System 1P3W, 3P3W, and 3V3A**

Current Range [A]	Voltage Range [V]											
	7500m	1.5000	3.0000	5.0000	7.5000	15.0000	30.0000	50.0000	75.0000	150.0000	300.0000	500.0000
5.0000m	7.5000 mW	15.0000 mW	30.0000 mW	50.0000 mW	75.0000 mW	150.0000 mW	300.0000 mW	500.0000 mW	750.0000 mW	1500.0000 mW	3.0000 W	5.0000 W
10.0000m	15.0000 mW	30.0000 mW	60.0000 mW	100.0000 mW	150.0000 mW	300.0000 mW	600.0000 mW	1000.0000 mW	1500.0000 mW	3.0000 W	6.0000 W	10.0000 W
25.0000m	37.5000 mW	75.0000 mW	150.0000 mW	250.0000 mW	375.0000 mW	750.0000 mW	1500.0000 mW	2.5000 W	3.7500 W	7.5000 W	15.0000 W	25.0000 W
50.0000m	75.0000 mW	150.0000 mW	300.0000 mW	500.0000 mW	750.0000 mW	1500.0000 mW	3.0000 W	5.0000 W	7.5000 W	15.0000 W	30.0000 W	50.0000 W
100.0000m	150.0000 mW	300.0000 mW	600.0000 mW	1000.0000 mW	1500.0000 mW	3.0000 W	6.0000 W	10.0000 W	15.0000 W	30.0000 W	60.0000 W	100.0000 W
250.0000m	375.0000 mW	750.0000 mW	1500.0000 mW	2.5000 W	3.7500 W	7.5000 W	15.0000 W	25.0000 W	37.5000 W	75.0000 W	150.0000 W	250.0000 W
500.0000m	750.0000 mW	1500.0000 mW	3.0000 W	5.0000 W	7.5000 W	15.0000 W	30.0000 W	50.0000 W	75.0000 W	150.0000 W	300.0000 W	500.0000 W
1.0000	1500.0000 mW	3.0000 W	6.0000 W	10.0000 W	15.0000 W	30.0000 W	60.0000 W	100.0000 W	150.0000 W	300.0000 W	600.0000 W	1000.0000 W
2.5000	3.7500 W	7.5000 W	15.0000 W	25.0000 W	37.5000 W	75.0000 W	150.0000 W	250.0000 W	375.0000 W	750.0000 W	1500.0000 W	2.5000 kW
5.0000	7.5000 W	15.0000 W	30.0000 W	50.0000 W	75.0000 W	150.0000 W	300.0000 W	500.0000 W	750.0000 W	1500.0000 W	3.0000 kW	5.0000 kW
10.0000	15.0000 W	30.0000 W	60.0000 W	100.0000 W	150.0000 W	300.0000 W	600.0000 W	1000.0000 W	1500.0000 W	3.0000 kW	6.0000 kW	10.0000 kW
25.0000	37.5000 W	75.0000 W	150.0000 W	250.0000 W	375.0000 W	750.0000 W	1500.0000 W	2.5000 kW	3.7500 kW	7.5000 kW	15.0000 kW	25.0000 kW

**Effective Power Range of the Wiring Unit of Wiring System 3P4W**

Current Range [A]	Voltage Range [V]											
	750m	1.5000	3.0000	5.0000	7.5000	15.0000	30.0000	50.0000	75.0000	150.0000	300.0000	500.0000
5.0000m	11.2500 mW	22.5000 mW	45.0000 mW	75.0000 mW	112.5000 mW	225.0000 mW	450.0000 mW	750.0000 mW	1125.0000 mW	2250.0000 mW	4.5000 W	7.5000 W
10.0000m	22.5000 mW	45.0000 mW	90.0000 mW	150.0000 mW	225.0000 mW	450.0000 mW	900.0000 mW	1500.0000 mW	2250.0000 mW	4.5000 W	9.0000 W	15.0000 W
25.0000m	56.2500 mW	112.5000 mW	225.0000 mW	375.0000 mW	562.5000 mW	1125.0000 mW	2250.0000 mW	3.7500 W	5.6250 W	11.2500 W	22.5000 W	37.5000 W
50.0000m	112.5000 mW	225.0000 mW	450.0000 mW	750.0000 mW	1125.0000 mW	2250.0000 mW	4.5000 W	7.5000 W	11.2500 W	22.5000 W	45.0000 W	75.0000 W
100.0000m	225.0000 mW	450.0000 mW	900.0000 mW	1500.0000 mW	2250.0000 mW	4.5000 W	9.0000 W	15.0000 W	22.5000 W	45.0000 W	90.0000 W	150.0000 W
250.0000m	562.5000 mW	1125.0000 mW	2250.0000 mW	3.7500 W	5.6250 W	11.2500 W	22.5000 W	37.5000 W	56.2500 W	112.5000 W	225.0000 W	375.0000 W
500.0000m	1125.0000 mW	2250.0000 mW	4.5000 W	7.5000 W	11.2500 W	22.5000 W	45.0000 W	75.0000 W	112.5000 W	225.0000 W	450.0000 W	750.0000 W
1.0000	2250.0000 mW	4.5000 W	9.0000 W	15.0000 W	22.5000 W	45.0000 W	90.0000 W	150.0000 W	225.0000 W	450.0000 W	900.0000 W	1500.0000 W
2.5000	5.6250 W	11.2500 W	22.5000 W	37.5000 W	56.2500 W	112.5000 W	225.0000 W	375.0000 W	562.5000 W	1125.0000 W	2250.0000 W	3.7500 kW
5.0000	11.2500 W	22.5000 W	45.0000 W	75.0000 W	112.5000 W	225.0000 W	450.0000 W	750.0000 W	1125.0000 W	2250.0000 W	4.5000 kW	7.5000 kW
10.0000	22.5000 W	45.0000 W	90.0000 W	150.0000 W	225.0000 W	450.0000 W	900.0000 W	1500.0000 W	2250.0000 W	4.5000 kW	9.0000 kW	15.0000 kW
25.0000	56.2500 W	112.5000 W	225.0000 W	375.0000 W	562.5000 W	1125.0000 W	2250.0000 W	3.7500 kW	5.6250 kW	11.2500 kW	22.5000 kW	37.5000 kW

■ Page 6-3 “Note”

**Note**

- For the meanings of the measurement function symbols that are displayed, see section 1.2, “Measurement Functions and Measurement Periods,” 1.5, “Computation,” 1.6, “Integration,” appendix 1, “Symbols and Determination of Measurement Functions,” and appendix 2, “Determination of Delta Computation.”
- For details on the wiring units expressed as  $\Sigma A$ ,  $\Sigma B$ , and  $\Sigma C$ , see section 5.1, “Selecting the Wiring System.”
- [-----] (no data) is displayed in places where the measurement function is not selected or where numerical data is not present.
- As with measurement functions such as efficiency ( $\eta$ ,  $1/\eta$ ), user-defined functions (F1-F4), and motor evaluation, there are functions for which it is not necessary to select an elements and wiring units. However, if a selection is made, it will not affect the numerical display.

■ Page 6-3 “Note”

**Note**

The waveform display data that is saved on the WT1600 is not the sampled data acquired at the sample rate (approximately 200 kS/s) of the WT1600. The waveform display data is a set of 1002 data points that has been P-P compressed (see the note in section 1.7) for displaying the waveform on the screen.

■ Page 15-15 “Added Note”

**Note**

Starting with ROM version 3.01 of this product, users can also select Chinese. See section 15.6 of user’s manual IM760101-01E for the operating procedure. Chinese can be selected on products with ROM version 3.01 or later installed. Note that the user’s manual gives the explanation in English. You can check the ROM version of your instrument in the menu that appears when you press the MISC key. See section 16.4 of the user’s manual for further instructions.

■ Page 16-5 “Added Error Messages”

Code	Message	Corrective Action	Sections
863	Attempted to start integration while Hold is ON.	Turn Hold OFF.	5.8

■ Page 16-9 “Fuse Rating”

- Part number: [A1463EF](#)

■ Page 17-7 “Voltage and Current Accuracy”

- .....
- .....
- For Irms, Imean, and Iac on a current sensor input, accuracy figures are specified with the line filter turned ON for  $10/\{\text{current sensor transformation ratio}(\text{mV/A})\}$  A or less.
- .....
- .....

■ Page 17-8 “Power Accuracy”

- .....
- .....
- For a current sensor input, add  $[0.05/\{\text{current sensor transformation ratio}(\text{mV/A})\}] \times$  (voltage reading) to the DC accuracy.
- .....
- .....

■ Page 17-8, 17-9 “Accuracy”

One year accuracy	Add (reading error of the accuracy at 3-month accuracy) $\times$ 0.5 to the accuracy 3-month accuracy.
-------------------	--

■ Page 17-20 “Safety Standard”

Safety standard*1	Complying standard	EN61010-1
.....	Overvoltage category (Installation category) II*2	
.....	Measurement category II*6	
.....	Pollution degree 2*3	
.....	.....	

\*1 Emission, immunity and safety standards apply to products having the CE Mark. For all other products, please contact your nearest YOKOGAWA representative as listed on the back cover of this manual.

\*6 Measurement category II (CAT II) applies to measurement of electrical equipment which is supplied from fixed installations such as a wall outlet wired from a distribution board, or of the wires themselves.