

MARCH 1972

BME

BROADCAST MANAGEMENT ENGINEERING



REMOTE
CONTROL VHF:
IT'S A FACT

SUDOUTH

Inside:
CM/E Magazine
For Cable Operators

Special Report:
Analysis of Cable Services



Introducing: The new Sony DXC-5000B color video camera.

Indiana University
Library
1973

It really puts you in control.

Meet the color video camera that gives you life-like pictures . . . right out of the packing carton! We call it the Sony DXC-5000B Color Video Camera . . . you'll call it great!

This is the color camera that gives you professional results . . . first time out . . . whether you're an old timer in VTR or just getting into this dynamic business. Fits right into just about any application like business, industry, CATV, medicine, science and any educational TV system. With its Tricolor Balanced Two-tube System featuring a Color Dissector Tube Assembly, the Sony DXC-5000B delivers faithful color signals . . . always.

Hook up the DXC-5000B and you'll quickly appreciate its features like the manual and automatic gain control, the master and individual white balance controls (with meters), the master

and individual pedestal controls, the master and individual level controls, and a special aperture control, which we call an image enhancer.

Pound for pound . . . and the DXC-5000B weighs only 27 pounds . . . you'll find this color camera a rugged, compact, reliable performer under just about any and all operating conditions.

If you're thinking about the next step after black and white VTR, the obvious answer is color. And if you're looking for a color system that delivers quality, look into the new Sony DXC-5000B Color Video Camera . . . it's the one that gets you operational just as soon as you get it unpacked!

For more information on the Sony DXC-5000B Color Video Camera, mail the coupon today. It'll get you right into the picture.

SN-103A

SONY®

Sony Corporation of America
Video Products Dept. BME-032
47-47 Van Dam Street, Long Island City, N.Y. 11101

Gentlemen:
Please send me more information on your DXC-5000B color video camera.

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

PHONE (AREA CODE) _____

CITY _____ STATE _____ ZIP _____

Circle 100 on Reader Service Card

MARCH 1972/VOLUME 8/NUMBER 3



Can you really monitor your transmitter without being there? Almost any kind of data can be telemetered. How to interpret it is the subject of most articles, pages 20-28.

**BROADBAND
INFORMATION SERVICES, INC.**
200 Madison Ave.
New York, N. Y. 10016
212-685-5320

Editor:
James A. Lippke

Technical Editor:
Thomas R. Haskett

Contributing Editor:
Robin Lanier

Assistant Editor:
A. E. Gehlhaar

Art Director
Gus Sauter

Production Manager:
Arline G. Jacobs

FCC Counsel:
**Pittman Lovett Ford
Hennessey and White**

-
- 6 Broadcast Industry News**
Everybody wants to set public cable policy
 - 14 Interpreting the FCC Rules and Regulations**
Program Logs—how to avoid sanctions.
 - 18 NAB '72**
Industry hopes for a revival—Billy Graham will be there.
-

SPECIAL REPORT






- 20 VHF TV Remote Control—Status Report II**
For managers: Insight on why engineers have trouble with application.
For Engineers: A look at demodulators.
 - 22 Q and A on the New Remote Control Rules**
For managers and engineers: Answers that aren't obvious in the rules.
 - 27 How a Mini-Computer Could Take Over a Broadcast Transmitter**
For managers and engineers: Speculation on the use of a computer.
 - 28 Test Signals for Monitoring Remotely Controlled TV Transmitters
Part II—The Modified Multiburst**
For engineers: How to Use VIT signals.
-

- 33 Upsurge in Discrete Four-Channel Stereo**
For managers and engineers: Quadrasonic broadcasting from the purist's point of view.
 - 34 Audio File**
Now an automated switching board for audio control.
 - 37 Broadcast Equipment**
New and significant products for broadcasters.
 - 42 New Literature**
Useful reading materials.
 - 46 Tech Notes**
Use phone lines for remotes.
-

CM/E MAGAZINE: For Cable Readers Only/Between pages 36 and 37

BPA BM/E, BROADCAST MANAGEMENT/ENGINEERING, is published monthly by Broadband Information Services, Inc. All notices pertaining to undeliverable mail or subscriptions should be addressed to 200 Madison Ave., New York, N.Y. 10016. BM/E is circulated without charge to those responsible for station operation and for specifying and authorizing the purchase of equipment used in broadcast facilities. These facilities include AM, FM, and TV broadcast stations; CATV systems; ETV stations; networks and studios; audio and video recording studios; consultants, etc. Subscription prices to others: \$15.00 one year, \$25.00 two.
Copyright © 1972 by Broadband Information Services, Inc., New York City.
Controlled Circulation postage paid at East Stroudsburg, Penna.

MODEL 938 QUAD SPLIT GENERATOR

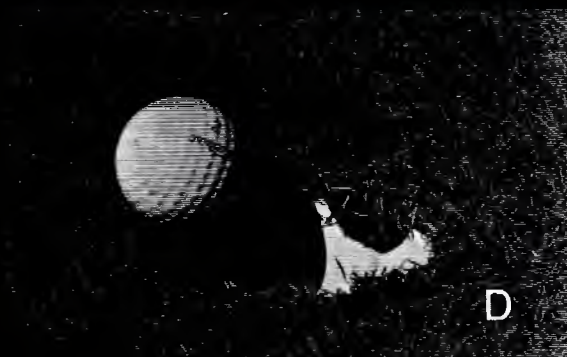

Model 938 is a complete special effects system. It permits up to four video signals to be displayed simultaneously. The separation of the four quadrants can be emphasized by the use of a variable width border which can be adjusted to any level from black to white. In addition, borders can be colored by use of a color background generator.

Complete remote control of the 938 is provided. The horizontal and vertical separation lines can be placed anywhere in the raster or, if desired, wiped completely off the screen to leave two signals separated either horizontally or vertically (see illustration).

The 938 system consists of two plug in modules, plus power supply and mounting frame. A remote control panel is supplied as standard equipment. GVG Model 909 Color Background Generator (optional) is suggested for those users requiring colored borders.

\$1,525

FOR ADDITIONAL INFORMATION, CONTACT GRAVCO SALES, INC.

6515 Sunset Blvd.
LOS ANGELES, CALIF.
(213) 462-6618

Station Plaza East
GREAT NECK, N.Y.
(516) 487-1311

125 South Wilke Road
ARLINGTON HEIGHTS, ILL.
(312) 394-1344

Redbird Airport
DALLAS, TEXAS
(214) 330-1245

1644 Tullie Circle, N.E.
ATLANTA, GEORGIA
(404) 634-0521

BROADCAST INDUSTRY NEWS

Dayton Cable Conference: More Questions Than Answers

It was billed as a "Policy Makers' Conference on Urban Cable." Everybody came (over 20 different classes of organizations) and everybody wanted to make policy. But on their terms, which were, sometimes, at odds with the recommendations of the conference sponsors, the Kettering Foundation and the Joint Council of Educational Telecommunications.

The central proposition—formulated by a Rand team in cooperation with 11 local committees—was that the 14 cities and villages making up the Dayton Miami Valley (Dayton and its environs) should cooperate in establishing an area-wide cable communications system. One system serving the en-

tire area would make it economically possible to provide 40-channel dual cable to all areas. Thus at least 18 channels would be available for community, educational, medical and governmental uses. With area-wide coverage, there would be enough homes—40 percent penetration of over 145,000 homes—to make it possible for Wright University to consider starting a "cable university." Rand recommended local area distribution by microwave to do the job of interconnecting six headends and of serving another 20 nearby rural areas if they sought cable services.

In theory the cooperative program sounded great, but practical problems murkied the waters. Only inner-city Dayton and adjacent incorporated city of Kettering were choice, high-density, cable-ripe areas. The other dozen communities very likely could support nothing other than a minimum 12-channel system, which would preclude many of the educational and information channels being established. Thus inner-city Dayton, 30 percent black and going more that way, could be subsidizing white suburbia instead of serving itself. Dayton's black mayor, James McGee, said he wouldn't approve going in with others unless some kind of differential rate structure, or payback to Dayton, could be worked out.

Black representatives of Model Cities complained that they weren't consulted in the planning. They, and blacks from other communities, declared they wanted control of programming in their areas and many wanted ownership—if not all, at least they wanted part of the action through joint venture.

Ownership was a big issue. The Rand report commented on the pros and cons of three alternatives: private, government and non-profit. Rand gave a strong plus to other-than-private ownership as a kind of test to see how well such systems would measure up to private ownership.

Many attendees expressed views

reflecting no confidence in private owners as stewards of cable TV for the public's benefit. Their goal was to get profits poured back into social programming.

Cable operators present were subdued—they obviously didn't want to antagonize anyone. They didn't object to a form of joint venture if that was the sentiment of the day. Papernow of Cypress, Stern of TVC, and Hostetter of Continental, praised the Rand report for raising the big issues, but Papernow expressed serious doubt as to the workability of an area-wide system because of the unequal contributions of the communities.

Just about everyone wanted to see open and free access to cable—regardless of who owned it—including the use of production equipment. A few warned that mere access wouldn't accomplish desired goals. If goals are to be met, viewers are needed, and this calls for a high degree of professionalism. Most persons present accepted the fact that somebody has to be responsible for content to minimize libelous attacks. Rand presupposed that private ownership pretty much meant private control, although it suggested that access could be governed by a broadly-based community group.

Cable equipment manufacturers weren't on the program, but they were probably the most perturbed by events. They saw the distinct possibility of franchise awards being repeatedly delayed until the conflicting demands of the many pressure groups got thrashed out and this would curb needed growth. Certainly municipal officers (about 20 percent of those present) saw the prospects of various groups getting into the franchising act in the future. Conflict will be the order of the day.

Economics of Two-Way Cable Services To Be Studied

Management consulting firm Arthur D. Little, Inc. will make a further study of the economic viability of in-

continued on page 8

New Cable Rules Adopted

The long-awaited FCC rules which open the top-100 markets to cable were voted in February 2. All 500 pages of them will go into effect March 31, 1972 — unless some suit is brought to delay action.

Every market can have three nets. Top-50's are permitted three independents; markets 51-100, two; below 100, one. No limit on systems beyond 35 miles of a station. Any educational or foreign language station placing a grade B signal in area must be carried. Significantly-viewed stations are to be carried. Leapfrogging rules have been set and complicated program exclusively must be adhered to.

Twenty-channel capacity must be built into top-100 markets. Three channels must be provided—one each for public access, education and local government. Other channels can be leased. The number of non-broadcast channels available must equal the number of TV signals carried.

Technical standards were also set.

"Scoopic 16 shoots the news faster than any other camera available."...Says Henk de Wit, Director of Photography at KDFW-TV Dallas.



Staff at KDFW-TV Dallas ready to film the news when it happens, where it happens with their Canon Scoopic 16s.

Canon's Scoopic 16. Made for fast-breaking news events. Because it shoots them faster than any hand camera around. That's a large claim for an under 7-pounder.

Uniquely designed hand-grip. Fully automatic exposure control with manual override. A built-in zoom lens. Motor drive and auto threading. All adding up to a perfect shot. Everytime.

Close-ups, medium and long shots, zooms, telephotos, wide angles. Even "follow" shots. Instantly focused. Indoors and out. Filming . . . not fumbling. Because your eye never leaves the view finder. You're always in focus for that great newsmaking moment.

But don't take our word for it. Try the Canon Scoopic 16 for yourself. **Give it a good workout for two weeks. Free of charge and without obligation.** That's how sure we are you'll find Scoopic 16 is all it claims. The best professional camera around. At only \$1250.

To qualify for our offer, you need only be a bonafide TV station in the U.S.A. If this is you, why not send in our coupon today.

- I'd like more information on Canon Scoopic 16.
- I'm interested in your offer. Please send my application for two weeks' trial use of Canon Scoopic 16. Free of cost and without obligation on my part.

Name _____

Station _____

Position _____

Address _____

City _____ State _____ Zip _____

Canon U.S.A., Inc., Dept. BM/E-1
10 Nevada Drive, Lake Success, New York 11040

Canon/SCOOPIC 16

* All Canon Scoopic 16s pictured, sold and serviced by Professional Cine Products, Inc., Dallas, Texas.

teractive cable services for a group of United States and Canadian companies, as Phase II of a three-phase project. Phase I, a market study on broadband communications networks, was finished in mid-1971 with a report to the 36 sponsoring firms. Although the first report was confidential, the decision to go to Phase II indicates that profitability for new cable services was found a definite possibility.

Bresnan of TPT Asks Broadcast-Cable Cooperation

In a talk to the Alabama Broadcasters Association Convention in Tuscaloosa in January, W. J. Bresnan, vice president of TelePrompTer Corporation, said that broadcasters and cablemen should explore their mutual interests rather than rehash endlessly their differences. He sharply criticized the letter sent to Congressional leaders by Dr. Frank Stanton, vice chairman of CBS, opposing the compromise of broadcasting and cable interests, calling Stanton's arguments "old, tired, and outmoded."

FCC Will Allow Mail Queries To Find Community Interests

In a positive response to a request by the NAB, the FCC has modified its *Report and Order* on the ascertainment of community problems by broadcast applicants. The original order said that mailing of questionnaires did not appear to be a sound method of getting "appropriate distribution" of the community inquiries. NAB pointed out that there are follow-up procedures for improving mail response rates. The FCC in its answer said that a broadcaster can rely on mailing if he can demonstrate that his method assures distribution to addressees generally throughout the city of license.

WHDH, Boston, Ordered to Cease Operation March 19th

In what may be the end of a long fight by WHDH-TV, Boston, to keep its contested license for Channel 5, the FCC on January 21 ordered WHDH-TV to cease operation at 3 a.m. on March 19; and, at the same time, the FCC granted program test authority to Boston Broadcasters, Inc., to operate WCVB-TV on Channel 5, beginning at that time. WHDH has twice been turned down by the U.S.

Supreme Court on appeals from an earlier FCC denial of license. The case has been complicated by SEC charges against Nathan David, a principal of BBI, and the FCC's grant to BBI stipulates that David must be effectively separated from BBI affairs. The Boston Herald Traveler Corp., owner of WHDH-TV, apparently stands to lose a property estimated to be worth \$50 million. Harold Clancy, president of Herald-Traveler, vowed to keep up the fight, using as springboard the opinion of FCC Chairman Burch that the decision was "flawed," although apparently required by court decisions.

Vermont Board Orders Cable Operator To Extend Service

State regulation of cable, established by law in Vermont, gave some substance to cablemen's fears of it in a case involving Green Mountain Cable TV of Burlington. A resident of Ethan Allen Farms, a new development near Burlington, complained to the Vermont Public Service Board that Green Mountain Cable would not extend service without a surcharge of \$1200, based on the cost of trenching in about 3480 feet of trunk. Later Green Mountain reduced the estimate to \$656 and offered to pay \$150 of it. But the Public Service Board held that Green Mountain should have installed its cable, as it had the opportunity to do, when power and telephone cables to the development were put in the ground. The Board ordered extension of service with no surcharge to the subscriber.

CBS Pulls Out of EVR Production

In a move that had been rumored but was stunning nevertheless, CBS announced in December a phase-out of its EVR processing operations, with future concentration on production of video program material and licensing to others of the EVR system. Brainchild of Dr. Peter Goldmark, former president of CBS Labs, and result of several years' intensive development work there, EVR reportedly got the CBS axe because it kept losing money, with no relief in sight. The gigantic consumer market for video cassettes, a vision that gave the industry a wild fever for several years, simply did not develop on the expected schedule. In a much cooler mood the industry now looks toward gradual development of the field over a number of years.

Association News

NAB . . . Vincent T. Wasilewski, president of NAB, called the FTC's recommendation that air time be made available for attacks on broadcast advertising "misguided in concept and destructive in effect." He charged that the FTC was sidestepping its statutory responsibilities to police advertising, and attempting to foist on the FCC an ill-conceived plan that would have a shattering effect on broadcasting . . . The NAB TV Code Review Board recommended a cutback in time devoted to commercials and in the number of commercials, on weekend programs aimed for children, along with a ban on using a children's program host to deliver commercials or endorse a product. Recommended maximums would be 11 non-program minutes per hour, with two commercials per half hour and four per hour, between 7 a.m. and 2 p.m. on Saturday and Sunday. The recommendations are subject to approval by the NAB Board of Directors.

CPB . . . The Corporation for Public Broadcasting has awarded \$117,485 to Minnesota Educational Radio to help set up a news and public affairs production unit. MER has also received grants from several foundations, totalling about \$200,000, to support the unit over a three-year period. Base of operations will be station KSJN in the Twin Cities. The unit will produce 24 hours of programming a week, stressing in-depth reporting of the news, and reaching, with affiliated stations, about 80 percent of the state's population.

Business Briefs

The national convention of the **Association for Educational Communications and Technology** will run April 16 to 20 in Minneapolis and St. Paul, Minnesota, under the general theme, "Design for Education." Further information: Gerald McKay, 440 Coffey Hall, University of Minnesota, St. Paul . . . Bellevue Hospital in New York got on the **Sterling Manhattan** cable with more than 70 receivers in day rooms, nurses' stations, children's waiting rooms, outpatient clinics, and other spaces . . . **EIA** reported **imports of consumer electronic products** up for

continued on page 10

Our new telephone
can save you money on remote broadcasts.



The Bell System's new phone is the simplest equipment yet for originating remote broadcasts.

This set, called the Portable Conference Telephone, plugs directly into a standard telephone jack installed at the broadcast site. It is equipped with two broadcast-quality microphones.

No amplifier is needed. No pre-amp. In fact none of your station's equipment is needed at the site—and that means no technician need be sent to operate it.

Your reporter simply carries the 19-pound set with him, plugs it into the jack and an AC outlet, dials your studio and is ready to go on the air. By using regular telephone lines, you avoid the expense of special audio channels.

Between remotes, this phone won't loaf on the shelf. For staff meetings, its built-in speaker allows as many as 30 people to listen to a telephone conversation—and the microphones allow them to join in. On an executive's desk, it can permit hands-free talking and listening.


Call your local Bell Telephone representative for details of how this new phone can work for you.

The American Telephone and Telegraph Company and your local Bell Company are continually working to improve service and help you do your job better.

In this case, when you have to broadcast from remote locations.



We think you'd like
to know more about
LPB's new S-2 Compressor/Limiter
than the opposite page
tells you



Here goes:

- At a cost 70% below that of our major competitor's equipment, the S-2 provides +14dBm rms output—enough to drive 99% of today's XMTRs.
- At a cost 70% below that of our major competitor's equipment, the S-2 is available with internal factory modifications for either asymmetric AM Modulation or pre-emphasis/de-emphasis for FM Broadcasting.
- At a cost 70% below that of our major competitor's equipment, the S-2 can be driven with line level inputs as low as -14dBm . . . if your level output is less than that, you're in trouble!
- At a cost 70% below that of our major competitor's equipment, the S-2 provides a variable compression threshold to minimize "Sneak-Up" effect as well as a choice of compression range to take care of the nature of your program material input.
- At a cost 70% below that of our major competitor's equipment, the S-2's fixed 2dB per second recovery rate in the compressor and 10dB per second rate in the limiter are appropriate for most of today's program material.

Now, need you spend any more than our modest offering price? We don't think so and to show you that our money is where our equipment is, look at the opposite page for our trial offer and determine if you need spend more than LPB's

\$475



LPB Inc.
520 Lincoln Highway, Frazer, Pa. 19355
(215) 644-1123


Circle 104 on Reader Service Card

the year through November compared to 1970: color TV by 40.6%; monochrome, 12.7%; audio units, 8.7%; videotape units, 23.8%. But electronic exports were up in most categories for the same period, too, with color TV up 77.7%, phonographs up 39.1%. Only tape equipment showed large drops . . . **Cypress Communications Corp.** announced FCC permission for the first microwave relay system in the newly opened CAR's LDS section of the spectrum, using **Laser Link** equipment; purpose is to extend service to sparsely populated areas and separated population clusters in Cypress' Fort Walton Beach, Florida, area . . . **Audio/Video Products** is a new firm in Downey, California, which will make digital clocks, automation systems, and other hardware, and also produce documentaries and commercial shorts for industry . . . **Markit Communications, Inc.**, Los Angeles, will carry out a direct sales campaign in Akron, Ohio, for **Akron Cable-Vision**, according to **Tele-View Communications Corp.** of New York, owner of the Akron system: size of the market, with 150,000 potential subscribers, made an in-house sales effort impractical, said TVC . . . **Ampex Corporation** said it anticipates a loss of about \$40-million, or about \$4 a share, for the year ending April 29, 1972 . . . **American Television and Communications Corp.** of Denver reported record earnings and sales for the half year ended December 31, 1971, of \$554,797 (14 cents per share) and \$6,667,743 respectively . . . **Athena Corp.** has awarded to **AEL Communications Corp.** of Colmar, Pennsylvania, the contract for strand mapping and engineering of CATV systems in Rotterdam, Colonie, Glenville, Scotia and Niskayuna, all in New York . . . **Telegen**, Palo Alto, California, has installed **Secam/60** closed-circuit TV at the Santa Anita race track, with about 80 25-inch monitors distributed around the track . . . Third of the new **Intelsat IV** satellites, largest relay satellites so far lofted, was put in orbit in January, adding average capacity of 5000 to 6000 telephones, or 12 TV channels, to the international service . . . **Cox Cable** has signed **Burnup and Sims, Inc.**, of West Palm Beach, Florida, to install cable systems totalling about 500 miles in the midwestern U.S. . . . **Channel One**, a new videotape production and duplicating firm at 620 Alpha Drive, Pittsburgh, Pennsylvania, announced capacity for 285

one-hour color dupes per day, as well as production facilities for training and instructional tapes . . . **Comm/Scope Corp.** started manufacture of wire and cable at its new 55,000-square-foot plant at Angier, North Carolina . . . **Tulsa Technical College**, Tulsa, Oklahoma, has expanded its curriculum with courses in radio broadcasting, covering every aspect from announcing techniques to transmitter operation, and leading to the first-class license exam . . . **Cerro Wire and Cable Company**, which recently took over the Viko plant in Freehold, N.J., has started production there of CATV cable with new computer-controlled equipment, which automatically maintains all important cable parameters to close tolerances . . . **Sony Corp. of America** broke ground in San Diego for a plant in which the firm will assemble 5000 Trinitron color tubes a month; later increases will raise this to 20,000 . . . **Bottom Line Associates** of Brookline, Mass., announced a service, Dialasound, allowing subscribing advertisers and agencies to hear the actual sound of a radio or TV station at any time.

People

Harry B. Burley Jr. was elected chairman of the board and chief executive officer of **Boston Insulated Wire and Cable**, succeeding his brother, Joseph C. Burley, who became honorary chairman . . . **Cerid Reed** became program manager of WCNY-FM, Syracuse, central New York's public radio station . . . **G. L. Davenport** was named general manager of Cox Cablevision Corp., **Roger Pierce** was named northwest regional manager, and **J. E. Durham** became manager of Cox's Astoria-Seaside-Long Beach systems . . . **John R. Dawson** is the new manager of application engineering of Philips Broadcast Equipment Corp., subsidiary of North American Philips . . . **Joseph Sharp** became commercial sales and technical advisor for Cable Television Co., of Charlotte, N. C. . . . **Juan Alonso**, former Cuban manufacturer and refugee from Castro's Cuba, was named vice president of McMartin Industries . . . **Elmer Smalling III** has joined Rosner Television Systems, Inc., Plainview, N.Y., as director of engineering; he was formerly director of engineering for Columbia Pictures . . . **Alan F. Culbertson** has been elected president of the newly-formed IEEE Communications Society.

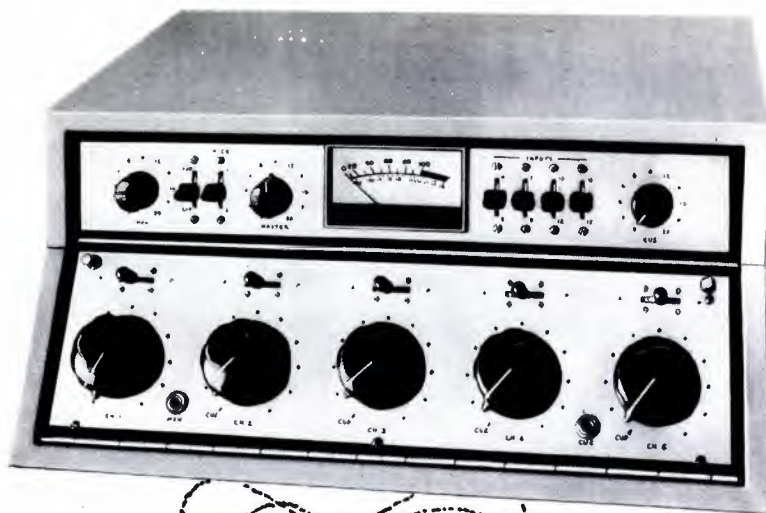

\$950

...or about half the price
you'd expect to pay

It's LPB's new S-5 Tribune. A 5 Channel monophonic console with built-in features that some of the high priced consoles don't have . . . audition channel, reliable Daven Attenuators with cue positions, plus much more. All for only \$950! And that's not all. There's other LPB equipment—an 8 channel console for \$1,700, the best and lowest priced (\$475) Audio Compressor/Limiter on the market, a fabulous new turntable and, at the lowest possible prices, all the other studio equipment and supplies any station could possibly use. To find out more about the S-5 and LPB's other products, just drop us a line or call Ted Davey at



LPB Inc.
520 Lincoln Highway, Frazer, Pa. 19355
(215) 644-1123

SEE US AT NAB—BOOTH 412

Circle 104 on Reader Service Card

Put digital stability in the picture



TeleMation TSG-3000 DIGITAL Color Sync Generator

All-digital circuitry.

All-digital genlock.

Programmable pulse widths.

Mono and color lock.

Bar/dot and black burst.

Front-panel test points.

Best time-base stability.

Two rates of genlock.

Full maintenance access
during operation.

Built to network specs.


Anything less isn't the world's most advanced
color sync generator.

Write today for complete technical and price
information on the TeleMation TSG-3000.

TELEMATION

P.O. Box 15068, Salt Lake City, Utah 84115
Phone: 801-487-5399

with these control-roommates

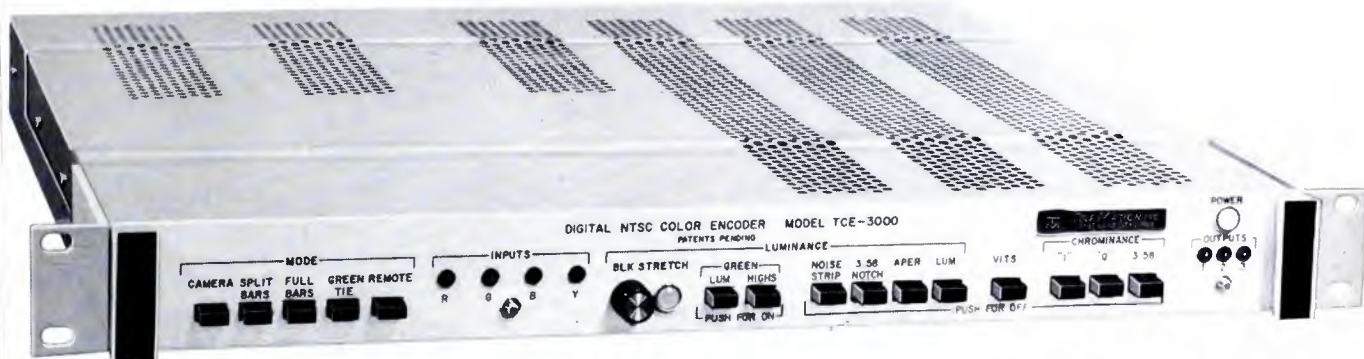

New TeleMation TCE-3000 DIGITAL Color Encoder with these exclusives:

Digital modulators.

Digital bars — $\pm 1/2\%$, $\pm 1/2^\circ$, 0-60°C.

Noise stripping (video coring).

Luminance black stretch.

100% circuit access during operation.

55dB carrier rejection, 0-60°C.

Digital phasing — no adjustments.

VITS/VIRS option.

Rock-solid stability — 95-135v, 0-60°C.

Plus: Level-dependent aperture correction. Video clamping.

Mixed highs from green. Full luminance from green.

3- or 4-tube operation. Conforms to NTSC, PAL, PAL-M, BBU and BBC standards.

Anything less isn't the world's most advanced
color encoder.

Write or call today for a demonstration
of the TeleMation TCE-3000.



TeleMation systems/sales offices: ☆ Albuquerque ☆ Atlanta ☆ Burlingame (Cal.) ☆ Chicago
☆ Dallas ☆ Denver ☆ Houston ☆ Indianapolis ☆ Las Vegas ☆ Little Rock ☆ Los Angeles
☆ Milwaukee ☆ Needham Heights (Boston area) ☆ New York City ☆ Norwalk (Conn.)
☆ Phoenix ☆ St. Louis ☆ Salt Lake City ☆ San Diego ☆ Tulsa ☆ Washington, D.C.

Circle 106 on Reader Service Card

INTERPRETING THE **FCC** RULES & REGULATIONS

Program Logs

Commission requirements for disclosure of programming information have long been a source of tedium to broadcasters. In its 1968 Program Logging Rules¹ amending the AM and FM rules designed to “streamline” log keeping and remove archaic requirements, and to conform requirements to provisions of the TV rule, the Commission endeavored to insure that information required by the revised “reporting” forms would be contained in station program logs. Yet, despite these clarifications, Commission sanctions against broadcasters appear to have measurably increased since promulgation of its 1968 Rules.

Forfeitures imposed upon broadcast licensees for “logging” violations have ranged as high as \$9000, depending upon 1) the nature of the violation, and 2) the licensee’s financial condition. In some cases, “logging” violations serve as one of several grounds for denial of license renewal, particularly when part of a course of “willful, fraudulent conduct.” In a series of decisions, the Commission has declared that violations which occur through “ignorance or oversight” and/or those committed by “officers or employees” of the licensee are not excusable. Also, corrective action taken subsequent to Commission citation, though a “mitigating” factor, does not rectify the original violation. Because of the increase in the number of Commission sanctions and the possibility of severe punishment, a review of pertinent elements of the “Program Logging Rules” is in order.

Programs

For each *program*, the Commission requires entries identifying 1) its name or title, 2) its time slot, 3) its type, and 4) its source. (For programs presenting political candidates, an entry must be made showing the candidate’s name and political affiliation.) Licensee classifications as to *type* and *source* are often the subject of Commission challenge. Hence, a brief definition of each classification follows.

The definitions of the following eight *types* of programs (a) through (h) are intended *not* to over-

lap each other and will normally include all the various programs broadcast. Definitions (i) through (k) are sub-categories, and programs falling under one of these three sub-categories will also be classified appropriately under one of the first eight categories. There may be further duplication within types (i) through (k)—a program presenting a candidate for public office, prepared by an educational institution, for instance, would be within both Political (POL) and Educational Institution (ED) sub-categories, as well as within the Public Affairs (PA) category. Program definitions are:

a) Agricultural (A) includes market reports farming, and other information specifically related to the agricultural population. (Too many licensees improperly place agriculture-type fare in the public affairs category.)

b) Entertainment (E) includes all programs intended primarily as entertainment, music, drama, variety, comedy, quiz, etc.

c) News (N) includes reports dealing with current local, national, and international events, including weather and stock market reports; and commentary, analysis and sports news, when an integral part of a news program.

d) Public Affairs (PA) includes talks, commentaries, discussions, speeches, editorials, political programs, documentaries, forums, panels, round tables, and similar programs primarily concerning local, national, and international public affairs. *A public affairs program is one which deals with public issues.* The licensee should expect the Commission to challenge the PA classification of a program which does not have this essential characteristic.

e) Religious (R) includes sermons or devotionals, religious news, and music, drama, and other types of programs designed primarily for religious purposes.


f) Instructional (I) includes programs (other than those classified under Agricultural, News, Public Affairs, Religious or Sports) which deal with the discussion or appreciation of literature, music, fine arts, history, geography, and the national and social sciences; and programs devoted to occupational and vocational instruction, and hobby programs. (Here again, too many licensees erroneously classify “instructional” fare as “public affairs.”)

g) Sports (S) includes play-by-play and pre- or post-game related activities, as well as separate programs of sports instruction, news or information—fishing opportunities, golfing instructions, etc.

h) Other (O) includes all programs not falling within categories (a) through (g).

continued on page 16

1. 12 RR 1599 (1968).

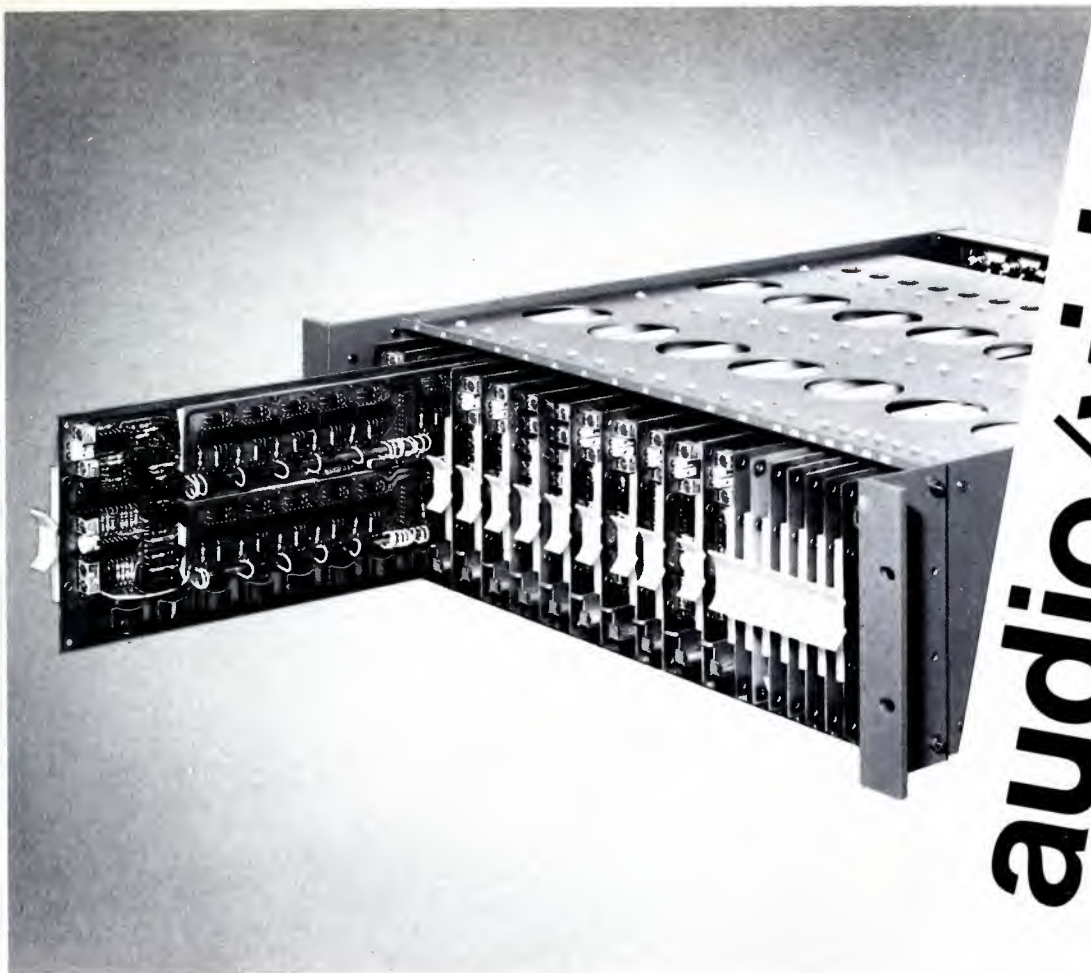

audio/video routing switcher

The new CDL VS-900 is the latest word in 4th generation all solid-state audio/video switching systems for broadcasting, surveillance or instructional uses. It incorporates many advances in control and switching technology and sets new standards in performance, reliability and economy.

- Highest performance standards through newly developed linear integrated circuits.
- Flexible, programmable control and tally through state-of-the-art digital circuitry.
- Fully interchangeable cards without performance compromises.
- Completely solid-state audio systems.
- Program grade, vertical-interval switching on all buses.
- Full selection of economical standard systems — VS-900 has eliminated costly customization of hardware. VS-900 is cost effective over the full range of 10×10 up to 300×300 inputs and outputs.

You may not need a system as large as that initially, but you might in the future? No problem, CDL Series 900 is modular in concept, and can be expanded at will. The basic building block is an array of ten input, single output switches, each handling ten signals to one destination. Matrices are formed from groups of ten such switches, thus providing one hundred crosspoints in the basic system sub-assembly. You can therefore buy one matrix with ten or even less cards now, and add to it any time later. 'Plug together' in-field expansion is now a reality.

May we have an opportunity to analyse your problem and offer a solution tailored exactly to your requirements?

VS-900 — from Central Dynamics — world leaders in television switching technology.

4th generation CDL series 900

- Versatile
- Economical
- Reliable



CENTRAL DYNAMICS LTD

CANADA - 147 HYMUS BLVD., MONTREAL 730, QUE
U.S.A. - 230 LIVINGSTON ST., NORTHVALE, N.J. 07147

- i) Editorials (EDIT) includes programs presented for the purpose of stating opinions of the licensee.
- j) Political (POL) includes those which present candidates for public office or which express (except in station editorials) views on candidates or on issues subject to public ballot.
- k) Educational institution (ED) includes any program prepared by, on behalf of, or in cooperation with educational institutions, educational organizations, libraries, museums, PTAs or similar organizations. Sports programs are not included.

Program sources are classified as either 1) local, 2) network, or 3) recorded, as defined by the following rules.

1) A *Local Program* includes any program which is primarily or wholly produced by the station, taped or recorded, so long as live talent is employed more than 50 percent of the time. In addition, the following programs shall be classified as "local:" a) local program fed to a network, b) non-network news program, and c) identifiable units of programs primarily featuring records or transcriptions which are *live* and separately logged. Yet programs featuring *recorded* records and transcriptions must be classified accordingly even though a station announcer appears in connection with such material.

2) A *Network Program* (NET) is any program furnished to the station by a network (national, regional or special). This includes delayed broadcasts of programs originated by networks.

3) A *Recorded Program* (REC) is any program not otherwise defined—including, without limitation, those using recordings, transcriptions, or tapes.

Commercial Matter

For all *commercial matter* (CM), the Commission requires entries identifying 1) the sponsor(s) of the program, 2) the person(s) who paid for the announcement, or 3) the person(s) who furnished materials or services. In addition, any entry or entries must be made showing the total duration of commercial matter in each hourly time segment or the duration of each commercial message in each hour.

Commercial matter includes "commercial continuity" (CC) i.e., the advertising message for which a charge is made or consideration is received. Included in the latter are 1) "bonus spots," 2) trade-out spots², and 3) promotional announcements of a future program where consideration is received for such an announcement or where such announcement identifies the sponsor of a future program beyond mention of the sponsor's name as an integral part of the title of the program (e.g., where the agreement for the sale of time provides that the sponsor will receive promotional announcements, or when the promotional announcement contains a statement such as "Listen tomorrow for the—[program name]—brought to you by—[sponsor's name]—.")

Exceptions to the above classifications include:

- a) Promotional announcements, unless they fall in a CA classification;

2. Announcements broadcast in return for receipt of free transportation, prize merchandise or other goods or services are to be logged "commercial." 16 RR 2d 156 (1969).

- b) Station identification announcements for which no charge is made;
- c) Mechanical reproduction announcements;
- d) Public service announcements;
- e) Announcements that materials or services have been furnished as an inducement to broadcast a political program or a program involving the discussion of controversial public issues; and
- f) Announcements made pursuant to the local notice requirements ("pre-grant" and "designation for hearing").

Furthermore, it is incumbent upon the licensee to make an entry denoting as close an approximation to the *time consumed* (duration of commercial matter) as possible. Notable exceptions to this requirement are *religious* and *political* sponsored programs. Because of the difficulty in measuring the exact length of "commercial continuity" in such programs, the Commission does not require licensees to compute commercial matter.³ The exception does not, of course, apply to any programs advertising commercial products or services, nor is it applicable to any commercial announcements. Since 1969, the Commission has imposed more forfeitures upon licensees for violations of commercial logging rules than for any other single category. One licensee was fined \$2000 for failure to log as "commercial time" the play time of records of artists which were played immediately before and/or after announcements promoting their appearances.⁴ In another case, the Commission ruled that "where musical recordings were so combined with commercial announcements, either by the play of such recordings immediately before, immediately after, or simultaneously with voice announcements, that which might otherwise be considered entertainment was instead merely an extension or part of the advertising message of the program sponsor and should have been logged as commercial."⁵

Furthermore, the Commission held that the broadcasting of extraneous, or "ad lib," matter to promote a show or dance represents "commercial matter," and should be logged as such.⁶ In light of Commission scrutiny into commercial logging practices, broadcasters would be well advised to exercise caution in reporting same.

Public Service Announcements

For all public service announcements (PSA), the Commission requires an entry showing 1) that it has been broadcast, and 2) the name of the organization or interest on whose behalf it is made. By Commission definition, a PSA is "any announcement for which no charge is made and which promotes programs, activities, or services of federal, state or local governments (e.g., recruiting, sales of bonds, etc.) or the programs, activities or services of non-profit organizations (e.g., UGF, Red Cross, Blood Donations, etc.) and other announcements regarded as serving community interests, excluding time signals, routine weather announcements and promotional announcements."

The subject of certain Commission sanctions, PSAs have often been confused with "commercial"

3. Report and Order, Docket No. 14187.

4. KISD, Inc., 18 RR 2d 1187 (1970).

5. Old Dominion Broadcasting Co., Inc. 20 RR 2d 748 (1970).

6. KOKA Broadcasting Co., Inc., 21 RR 2d 981 (1971).

continued on page 50

WILKINSON HAS EVERYTHING



**AM TRANSMITTERS - 250 W
1 KW - 5 KW - 10 KW - 50 KW**



LIMITERS - Mono and Stereo



ACC AMPLIFIER - Mono and Stereo



REMOTE AMPLIFIER



**FM TRANSMITTER - 10W - 50W
250W - 1 KW - 2.5 KW - 5 KW
7.5 KW - 10 KW - 20 KW - 40 KW**



MONAURAL CONSOLES



STEREO CONSOLES



FM EXCITERS



STEREO GENERATORS

AND ALSO FROM WILKINSON AM RF Amplifiers, line surge protectors, AM Monitors, field intensity meters, line amplifiers, monitor amplifiers, distribution amplifiers, FM receivers, antenna tuning units, phasers, dummy loads and silicon rectifiers.

**WILKINSON
ELECTRONICS, INC.**

1937 W. MacDADE BLVD., WOODLYN, PA. 19094

TELEPHONE (215) 874-5236/874-5237


NAB BOOTH 201 WEST HALL

NAB 1972: 50th Convention Shaping Up

Almost as old as broadcasting itself, NAB marks its 50th year this April in Chicago, with the traditional festivities and a program filled with management and engineering goodies. Luncheon speakers include Treasury Secretary John Connally (Monday), CBS Vice Chairman Frank Stanton (Tuesday), and FCC Chairman Dean Burch (Wednesday). Dr. Billy Graham will receive the Distinguished Service Award, and wcco Director of Engineering John Sherman will receive the Engineering Award.

Technical sessions seem promising: A panel session on quadraphonic broadcasting is scheduled, with broadcasters and manufacturers discussing the merits of discrete vs. matrix techniques. People from the Bonneville International stations will present a report on the many TV translators they use to cover the sparsely populated Utah salt flats. Radio sessions will cover modernization, design of new transmitters, and operation and maintenance of directional antenna arrays. A summary will be given of recent tests conducted in Altoona and Allentown, Pennsylvania, which may indicate the feasibility of circular polarization for TV transmitting antennas. There will also be a re-

New frequency and modulation monitor can be seen at the McMartin booth.

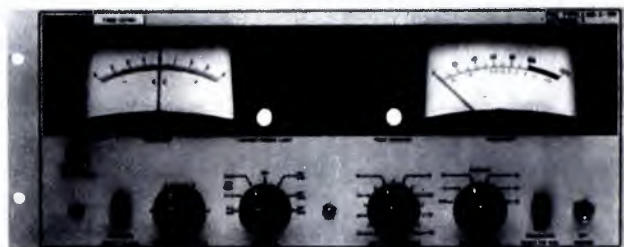

New FM Volumax unit will be shown by CBS Labs.



port on extensive use of video cart machines at WWL-TV, New Orleans. Continuing the trend into video automation, GE engineers will discuss "The Next Step in Automation."

Despite the soft economy, there are signs that all is not lost in the industry. While Ampex reels from a multi-million loss in 1971, some companies report things are looking up. For example, Grass Valley's backlog at December 31, 1971 was \$1.3 million, compared with \$300,000 at the end of 1970. Broadcasters aren't in as bad shape as you might think. Cox Broadcasting just reported an increase of seven per-

cent in net income over the previous year. TV revenues were even with last year, but radio revenues were ahead nine percent. Cox President J. Leonard Reinsch said recently that while the broadcasting industry still faces difficult problems, particularly on the regulatory side, there has been some lessening of pressures during 1971.

At this early date, the 1972 convention exhibition appears to be shaping up at about the same size as last year. During 1971, many stations have had equipment rebuilt and repaired rather than invest in new gear. Now manufacturers are eyeing these ripe prospects, who will likely buy new equipment with the expected upturn in business.

While it's too early to get a peek at all the equipment surprises planned for the exhibit area, some information is available. Moseley Associates will introduce a new digital TV remote control system using BCD digital techniques. Independent systems provide remote control and telemetry, automatic parameter logging, status indications, individual fulltime parameter display panels, and control system. IGM will introduce its new Aristocart, an audio cartridge said to have less wow and flutter, and the ability to deliver monaural response from


continued on page 48

NAFMB Schedules Promotion Awards


Just ahead of the big convention, NAFMB will meet at the Palmer House in Chicago from April 6 to 9. In addition to the usual management, programming, and engineering sessions, the association inaugurates this year a contest in audience promotion and sales promotion. First, second, and third place winners will be selected in each category, and awards will be presented at a special Honor Luncheon during the convention. Any FM station is eligible, and NAFMB advises that promotions need not be large, elaborate or expensive. Originality, creativity, and effectiveness will count most, and both small and large market stations will be given consideration. This seems a first for the FM industry.

now...


a company
that has AM, FM
and TV frequency
and modulation
monitoring
systems.

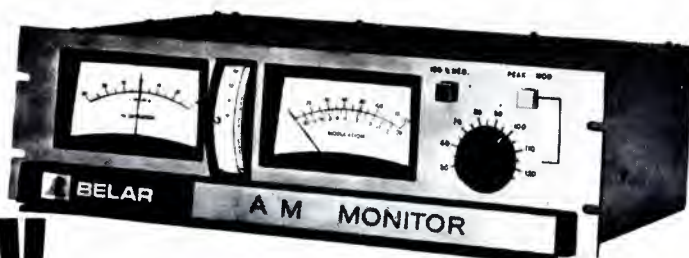

Type Approval #3-176

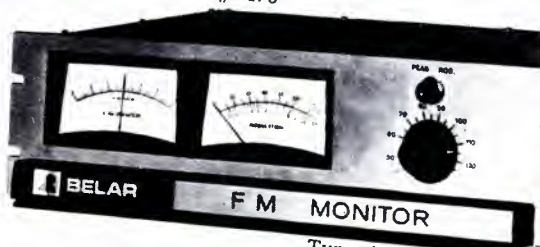

Type Approval #3-129

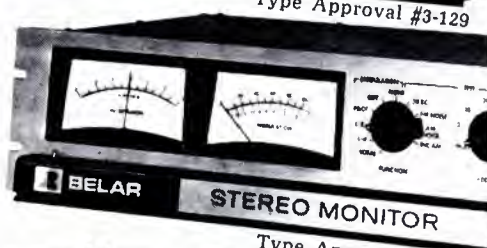

Type Approval #3-146



Type Approval #3-162



Type Approval #3-181



Type Approval Not Required

Now . . . Belar. Belar is the only company that has the necessary type approvals on all three monitoring systems. Belar accuracy permits use of the maximum power allowable and maximum power means maximum profit. Add to this that all Belar equipment is immediately available.

Isn't it time you stopped running around and finally settled for a company that can handle all your frequency and modulation monitoring needs? Contact Arno Meyer . . . he'll show you the way.

 **BELAR**

See us at the NAB Show—Booth #239
West Exhibit Mall—Conrad Hilton

**BELAR ELECTRONICS LABORATORY, INC., DEPT. BM-32
BOX 83, UPPER DARBY, PA. 19084 • (215) 789-0550**

Circle 109 on Reader Service Card

VHF TV Remote Control— Status Report II

Last August **BM/E** reported on the problems of going remote. Since then the required VIT signal has been approved to remove one unsettled matter. Biggest concern now is whether the demodulator selected can do the job.

ONE YEAR AGO (in March, 1971) the FCC adopted rules permitting remote control of VHF transmitters. Rules governing UHF remote control were changed to conform with the standard set for V's. Since then 54 applications (FCC form 301A) have been filed—36 V's, 18 U's. Thus far, eight have been granted. Of those not granted, 30 applicants have received letters asking for additional information or clarification of their submission.

Basically, the FCC would like to see quite complete applications including proposed layouts as well as the list of equipment that will be used. The stickiest area involves demodulators, since the demodulator is a major source of distortion.

Envelope detection of color signals reduces luminance more than chrominance. Thus there is a chrominance/luminance ratio error after demodulation.

Since effects of quadrature distortion are proportional to the square of the chrominance/luminance ratio, bright highly-saturated colors have more quadrature distortion than dark colors of lesser saturation. Quadrature distortion will give inaccurate indication of differential gain and phase and distort chrominance/luminance relationships.

Effects of quadrature distortion are alleviated somewhat by reducing the frequency response of the color subcarrier prior to detection and then restoring the video level after detection.

Product detectors get away from effects of quadrature distortion, but a product detector and an envelope react differently to residual incidental phase modulation of a transmitter. Transmitters are normally adjusted for home receivers which are envelope detected. Compensation for this difference can be made so that a product detector demodulator can "read" the right waveform.

The design of a demodulator requires many trade-offs and all of the specs should be taken into consideration. Details of the most precision demodulators (announced so far) are listed in the accompanying table. In addition to the specs listed, the FCC is interested in stability (short-term and long-term)

and the subcarrier relative to the carrier signal at the detector with and without sound traps.

The FCC has indicated it is interested in state-of-the-art demodulators and this eliminates some of the older units on the market. Some applicants have proposed equipment which the manufacturer will not recommend for this purpose.

There has been some question on sensitivity of test equipment. An RF amplifier might be necessary. Such amplifiers should be low in distortion and be matched in bandwidth to the transmitter. Such equipment does not have to be type accepted, but the FCC is extremely interested in specifications.

Gene Napier of WJCT decided to amend his application (after the FCC raised the question) to eliminate the RF amplifier. This necessitated using a separate antenna connected directly to the demodulator. (Originally Napier proposed one antenna and an RF amplifier with a splitter to feed both the aural modulation monitor and the demodulator.) Manufacturers are aware of this problem. McMartin, for example, has come out with a TBM-2500C series designed specifically for use with type approved monitoring equipment.

Test equipment to provide the necessary VIT signal may become a problem. By April 1972 remote systems must incorporate VIT standards (section 73.699). Tektronix has suitable equipment in production (see separate article, page 28) and Telemet indicates it has such equipment. Other manufacturers are expected to follow, but will not have instruments by April. Whether or not the broadcaster will be hard-pressed to get delivery will depend on just how many are ready to begin remote operations come April 30th.

New developments are occurring in remote control equipment. Spantronics has developed a final configuration which they believe is ideal for remote control and future computer control. Moseley and Rust Corporation have come up with new digital TV remote control systems which will be on display at NAB.

BM/E

Table 1—Demodulator Specifications

Characteristic	RCA ^o BW-4CI	Rohde & Schwarz AMF	Telemet Model 4501-A1	Scientific Atlanta Model 6200 ^o	Dynair RX-4B	EIE CTDI
Overall Frequency Response (Sound Notch In) ^{***}	±0.7 dB ±0.5 dB at 3.58	±.5 dB ±0.9 dB at 3.58	-3 dB ±0.5 dB at 3.58	±0.5 dB to 4.2 MHz	-3 dB ±0.5 at 3.58	±0.5 dB to 4.2 MHz
Lower Sideband Response	-20 dB except -16 dB at -1.25 MHz	-20 dB	-20 dB	-40 dB for Adjacent Carriers	-45 dB for Adjacent Carriers	-30 dB at -1.25 MHz
Input Cable Match (Return Loss)	Not specified	34 dB	18 dB	19 dB	VSWR = 1.5	16 dB
Type Detector	Envelope	Envelope	Envelope	Product	Envelope	Product
Subcarrier Response at Detector	0 dB	-3 dB	-3 dB	0 dB	0 dB	-1 dB Max
Differential Gain	10%	5%	5%	±0.2 dB max.	5%	±2%
Differential Phase	3°	±1°	±1°	±0.5°	±1°	±0.5°
Low Freq. Envelope Delay	50 ±15nS	±15nS	±25nS	±50nS	±50nS	±35 nS
High Freq. Envelope Delay	±30nS to 3.8 +200nS at 4.0	±25nS at 3.58 +160nS at 3.9	±25nS at 3.58 +180nS at 4.0	±50nS	±25nS at 3.58 +150nS at 3.9	±25nS at 3.58 +200nS at 3.90
Hum and Noise	-50 dB	-60 dB	-50 dB	-50 dB below 1.5v out	Not specified	-60 dB
Low Frequency Tilt	2% at 50 Hz	Not specified	2%	2% max. at 50 Hz	2%	2%
2T Sine Squared Pulse	Illustrated but not specified	Not specified	2%	2% K-factor, max.	2%	2%
Vacuum Tube or Solid State	Vacuum Tube	Solid State	Solid State	Solid State	Solid State	Solid State
Susceptibility to High RF Environment	Not specified but OK	Not specified but OK	Not specified but OK	Not recommended	Not specified	Not specified

* Intended for use at transmitter site only.

** Noise Figure 7 dB, VHF; 12 dB, UHF.

Minimum Input Level -20 dBm (100 uv) for maximum output.

AGC Sensitivity ±0.5 dB maximum output change for 40 dB input change.

*** RCA, R & S, and Telemet units have switchable sound notches.

Equipment for Going Remote

Numbers in parentheses refer to reader service card. Circle for more info.

Remote Control	Measuring Equipment	Monitoring Equipment
<p>Marti Electronics Remote control system, RMC-2AX 10 and 24 channels for wire or STL (310); automatic digital logging equipment, ACL-100 (311).</p> <p>Moseley Associates Digital Remote Control Equipment, consisting of: DCS-1 Digital Control System, capacity through 96 channels (337); DLS-1 Digital Logging System, in groups of 20 parameters (338); DSI-1 Digital Status Indicator System, in blocks of 32 channels; individual parameter display panels for continuous metering of important parameters; and independent control-only systems (339); Remote control systems, 15 and 30 metering channels, 30 and 60 control, PBR-15 (312) and PBR-30 (313); status control system, 14 channels, SC5-2 (314); Tolerance Alarm Unit, TAU-2 (315); Automatic Data Printer, ADP-220 (316). Systems have been designed to remove TV transmitter from air after one hour, meeting FCC requirements.</p> <p>Rust Corp. Remote control RC-2600A (317); RC-1000, 22 controls (318); Status/Alarm Display CPX-10 (319); Auto Log, AL-400 (320). New digital remote control system (343).</p> <p>Spantronics Engineering Digital remote control systems (334).</p>	<p>Dynair Demodulator RX-4B (340).</p> <p>Electronic Industrial Engineering Demodulator CTDI (341).</p> <p>Scientific-Atlanta Demodulator 6200 (342).</p> <p>Rohde & Schwarz VSB demodulator, type AMF (321). Also front-end receiver HS-2064 for off-air (322). Switchable sound trap and group delay complementary to FCC transmitter specs.</p> <p>Tektronix Test signal generator 147 NTSC. Source of all recognized vertical interval and full field test signals (eight) including VIRS (323).</p> <p>Telemet (Div. of Geotel) Broadcast demodulator 4501-A1. Field-tested. Input 5mV or 5V. Has frequency response and group delay response meeting FCC requirements. Switchable sound trap. (324). Price \$3000. Vertical Interval Test Set as required by FCC Specification #FCC 73.676(f), for remote operation. All signals are available at Full Field modular construction. Price \$3900.00 (336).</p>	<p>Belar Electronics Lab Inc. TV remote monitoring system includes RF amplifier, RFA-3 (325); digital clock (326); aural modulation monitor TVM-1 (327); and frequency monitor, TVM-2 (328).</p> <p>McMartin Industries Inc. VHF aural modulation monitor, TBM-5500 (329). Price \$1300. Rf amplifier matched to monitoring equip. TBM-2500C. Price \$515. (335).</p> <p>Time & Frequency Technology TV frequency and modulation monitor. Model 701, has high sensitivity and includes peak flasher (330); aural modulation monitor, Model 702 (331); remote meter and peak flasher (332); automatic logging adaptor and digital clock (333).</p>

Q and A on the New Remote Control Rules

By Sal Fulchino

RUST LAYOUT SHEET				
Station _____		Engineer _____		
Xmtr Parallel Transmitters _____		Date _____		
Fail Safe to Control PLATES _____		Basic System "RC-2600A" _____		
Pos.	Control	Units	Metering	Units
1	(AB) FIL ON (AB) FIL OFF	(2) 45	FIL ON Indication	6B-1
2	(AB) PLT ON (AB) PLT OFF	(2) 45	TX A Ep	8F
3	(AB) Vis. Pwr Raise (AB) Vis. Pwr Lower	(2) 45	Comb. Vis Power	DCA-1
4	(AB) Aural Power Raise (AB) Aural Power Lower	(2) 45	Comb. Aur. Power	DCA-1
5	EBS Latch ON EBS Latch OFF	(2) 45	Aural Modulation	HP 335
6	AB Mode A Mode	(2) 45	TX A Vis. Ip	9K
7	B Mode Spare	45	TX B Vis. Ip	9K
8	Exciter A ON Exciter B ON	(2) 45	TX A Vis. Pwr.	DCA-1
9	Auto Exc Switch ON Manual Exc Switch ON	(2) 45	TX B Vis. Pwr.	DCA-1
10	(AB) Fault Reset (AB) Ovid. Indicator Reset	/	TX A Ep	/
11	Reject Ovid. Reset Spare	/	TX A Aur Ip	9K
12	Manual APC Auto APC	4C/47	TX B Ep	8F
13	Main STL On Air Stdby STL On Air	4C	TX B Aural Ip	9K
14	Main STL emerg bypass to exc. A (DIRECT)	4C	TX A Aurl. Pwr.	DCA-1
15	Slide Chain on Air Net On Air	4C	TX B Aur. Pwr.	DCA-1
16	Emergency Audio on Air			
17			Vis. Carrier Freq.	DCA-1
18			Aur. Carrier/Intercarrier Freq.	DCA-1
19			Tower Light Current	7C
20			1 Line Volts	6B-1
21			2 Line Volts	6B-1
22			3 Line Volts	6B-1
23				
24				
25			Zero Calibrate	--
26			Full Scale Calibrate	--

Fig. 1. Parameters that should be telemetered are paired to the control point.

ADOPTION BY THE FCC OF NEW RULES governing the remote control of VHF-TV stations has, as was certainly to be expected, stirred up a lot of questions on the applications of the rules. My firm has collected the rules questions we are hearing most often from customers. We list them below, with answers we have developed in consultation with FCC staff normally concerned with this field. Thus, although the answers are *not* official FCC statements, those FCC staff members we consulted agreed that, as of this moment, the answers are correct.

Naturally, also piling in are questions on what remote control entails in technique and equipment with various transmitters and station set-ups. What functions *must* be covered, and what additional functions would be advantageous for the operator? What equipment will do the job? How should it be laid out to fit a particular set of station requirements?

The manufacturer of remote control equipment has developed methods for laying out a system efficiently and for integrating it with the station's requirements. For example, our firm uses a layout sheet (Fig. 1) which shows the required and suggested parameters that should be telemetered to the control point, tabled beside the associated control that should be made remote. Listed also is any auxiliary interface equipment required.

This and other similar planning tools developed by remote-control equipment manufacturers are the station operator's best insurance against costly mistakes and systems that don't do the whole job. Omissions that have to be corrected after the system is in place are particularly liable to convert a neat, sound installation into a "haywire" job with a high trouble potential.

Here is our list of questions and answers on the rules. We intend to add to the list as pertinent questions come to us from the field.

If a diode demodulator is used at the transmitter site and a new, exotic demodulator is used at the control point,

a) Is the control point demodulator to be calibrated to the transmitter site diode?

Yes, a calibration graph or table should be de-

Mr. Fulchino is president of Rust Corporation, Everett, Massachusetts.

We've got the remote control rules from the FCC, and putting them into practice is bound to raise a number of unanswered questions. Here is a batch of the questions that station operators are asking, along with answers informally cleared with the FCC.

veloped so that readings on the secondary unit can be read to agree with the selected standard unit.

b) Can the transmitter site demodulator be calibrated to the exotic demodulator at the control point?

Yes, a calibration graph or table should be developed so that readings on the secondary unit can be read to agree with the selected standard unit.

When visitations are made (either five out of seven days, or once per week, whichever rule applies), does there have to be a complete recalibration of all parameters?

Rules call for observation of the transmitter installation during the visitation period. If the observation is that recalibration is necessary, then corrections must be accomplished and noted as required. On the monitoring equipment the operator can check one or several points of the curve. He does not have to check the entire curve.

If the answer to the above is "Yes," will the FCC grant waivers to this visitation requirement after the station has operated for a length of time and can show extreme stability and tracking between the metering at both locations?

Waivers will neither be granted nor needed. If the installation displays such stability, the recalibration will not be necessary anyway.

Can the Aural and Visual Frequency Monitor be located at the transmitter site?

Since FCC rules only require the logging of Aural and Visual frequency once each day, the monitors may be at either location so long as the frequency deviation of the visual and aural transmitters can be measured in accordance with the rules.

If it is not possible to obtain a satisfactory off-the-air signal at the control point, is it permissible to pick up the signal at a location near the control point and feed it to the control point by coax cable?

It is permissible to have reasonable coax feed between the antenna and the receiver, but not between the receiver and the test equipment.

If the TV Transmitter and an FM Transmitter of the one licensee are at the same location, can the metering of one be transmitted to the control point

via the subchannel of the other?

NO! Except in an emergency. However, if the TV and FM each have separate control and metering (via its own subchannel), the telemetry of both can be fed to the control point via one of the subchannels for Autolog purposes onto a single log.

Is permission required to do this under emergency conditions?

Permission is required. This permission should be obtained by letter prior to an emergency and displayed to cover the emergency when and if it occurs.

Regarding the rule section which states that "the loss of any telemetry function which provides information necessary to comply with the logging requirements of 73.671 shall result in the actuation of automatic circuitry, etc—," does this apply to aural plate voltage and/or aural plate current?

Yes. Although this may appear contrary to the FM Rules where the transmitter power is determined by the direct method, the TV Rules, as they presently read, do require the logging of Aural Plate Voltage and Aural Plate Current and the activation of the automatic timing circuits of the telemetry if either or both is lost. However, it is expected that this situation will shortly be such that TV Rules will be in comparative agreement with the existing FM Rules.

In an emergency where the telemetering is returned to the control point via the subchannel of the Aural transmitter, and it is not possible to obtain the telemetering because of transmitter problems, can the exciter of the transmitter be radiated to transmit the telemetering to the control point?

Yes, provided prior FCC permission is obtained to do so during an emergency.

If Aural Transmitter subchannel means are used to transmit the telemetering from the transmitter site to the control point, must the Modulation Monitor be capable of accurately reading the modulation of the Aural Carrier by the subchannel?

Yes, (remembering that the Aural Modulation Monitor must be located at the Control Point).

If two stations (different licensee, different ownership) share a transmitter site, can they arrange to

have one engineer perform the transmitter inspections for both stations?

Yes, provided the manpower is on both payrolls.

Is it permissible to remote-control two or more transmitter sites of different ownership from one remote control by an operator of the proper class whose salary is shared by the two or more licensee's?

Yes, but care must be taken to see to it that the operator on duty is not required to perform more duties than one man is capable of performing in a satisfactory manner.

At the present time are subchannel Frequency and Modulation monitors required?

No, but you must have a reliable means of checking the subchannel frequency.

Will a new "Proof of Performance" be required when applying for remote control?

NO!

Paragraph 38 of the "First Report & Order" states that the Control Point located Modulation Monitor "Carrier Level" meter can be used as an indication of transmitter power level in the event of failure of the metering transmission path. Some new monitors have lights to indicate "Carrier Level" rather than a meter—is this acceptable?

Yes.

Has the FCC type approved Modulation or Frequency Monitors for "off-the-air" operation?

Type-approved direct-feed monitoring equipment must be used but there is no such thing as an off-the-air type approval.

Has the FCC type approved RF Preamplifiers for TV?

No, but neither has the FCC prohibited use of such devices. In fact, paragraph 73.676 (2) (4) indicates that the use of such an "apparatus" is allowable.

What are the rule requirements for duties and utility action of the first class operator at the control point?

The rules are essentially the same as for the operator that is located at the transmitter site. While he may be utilized "for other duties," "such duties shall in no way impair or impede the required supervision of the television broadcast transmitter." When operating by remote control, all required monitoring equipment and remote control metering must be "readily accessible and clearly visible to the operator" at all times! The operator must be in the same room as the monitoring and remote control equipment. This does not allow for a room size, wherein the operator can still be in the same room as the equipment but far enough away so that he cannot read the remote control telemetering or determine that the required waveform readings are correct.

A station has separate Aural and Visual transmit-

ters and is capable of multiplexing the Video Signal through the Aural transmitter. The Aural transmitter can meet the 20% power rule of the FCC both as to Video and Aural Power. How often must the transmitter site be inspected?

At least once every seven days.

A station has two transmitter sites—for example, Site "A" the AM site and Site "B" the FM and TV site. Each site has its own remote control system to its control room (both in the same building) with the required class of operator on duty. Each control point has equipment to meet the Alarming requirements of automatic transmitter logging. The two remote control systems share an automatic logging system that is "located in the near vicinity of the operator on duty" and can be "inspected by him periodically during the broadcast day—." Is this in conformity with the present FCC rules?

Yes.

What is the station procedure to be followed if a required piece of off-the-air monitoring equipment becomes inoperative? For example, the demodulator, off-the-air RF amplifier, VIT generator or vectorscope?

Follow the same procedure as for an inoperative modulation monitor. Section 73.691 of the FCC Rules.

Does the off-the-air monitoring equipment have to be devoted full time to the monitoring of the required signals for remote control operation?

In essence the equipment should continuously monitor the signals required under the TV Remote Control Rules. However, the equipment can be utilized for periodic observations of other signals, provided that the equipment is always immediately returned to the capability to display the required TV Remote Control signals.

What are the unattended transmitter site security requirements?

Security requirements for the transmitter site require that reasonable precautions be taken to see to it that access by unauthorized persons is virtually impossible. However, if access is gained by unauthorized persons, provisions must be made for immediate notification to control point personnel. Minimum requirements should include, but not be limited to, a reasonable fence surrounding the entire area, metal screening or expanded metal covering for building glass area, fail-safe intruder alarm to the control point and/or other locations, such as a police station.

If the remote control point is in the same building or complex as the transmitter, is it necessary to incorporate into the equipment the telemetry one-hour timer circuit?

The Commission has indicated that under some circumstances a waiver may be obtained. The request for waiver should be included in the original remote control application.

BM/E


COLOR MONITORING FOR UNDER \$400 ...AND THE QUALITY SPEAKS FOR ITSELF!

Listen to what Otto Claus, Chief Engineer, WBAL-TV, Baltimore, says about general purpose monitoring with RCA'S low-cost commercial color receiver:

"Our only regret is that these units were not available sooner."

"Every one of our 17 units has operated perfectly from original turn on."

"The quality of reproduction of these receivers...is more than adequate for all but the most exacting monitoring functions."

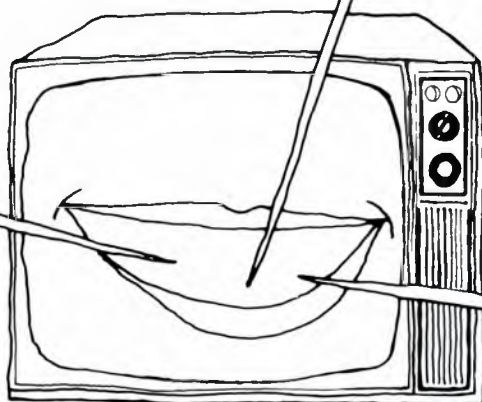

Unlike color sets intended for home use, this receiver is equipped to accept RF or bridged direct video and audio line feed without the need for costly adaptors.

For under \$400, you get every non-critical monitoring function you can ask for — picture, sound, live or tape, color or monochrome. It's especially suitable for monitoring needs backstage, for the band, for the audience, and similar applications.

For complete details, send the coupon. We'll show you cold cash reasons why RCA's commercial color TV is your best answer.



RCA AccuColor ©

Circle 105 on Reader Service Card

RCA Service Company C-143
A Division of RCA
Commercial Products Sales, Bldg. 203-3
Camden, N. J. 08101

Please furnish further information about RCA commercial color sets for broadcast monitoring purposes.

Name _____

Title _____

Station _____ Phone _____

Address _____

City _____

State _____ Zip _____

2500 kW output

Now—only two tubes are required in the power amplifier stage of a 2500 kW, 100% modulated long, medium or shortwave broadcast transmitter

Shown below are two EIMAC X-2159 developmental tetrodes, the most powerful tubes in the world. A single X-2159 has an anode dissipation of 1250 kW. Two tubes provide a carrier power of 2500 kW, 100% amplitude modulated.

Here is a technological breakthrough permitting a very high power broadcast transmitter to be built, having a single output stage. Now, for the first time, 5 megawatts output, or greater, is practical. Substantially less capital investment is required; driver stages, power supplies, control circuits, cabinets, and floor space may be substantially reduced when these high gain tetrode tubes are employed.

For full specifications on the new EIMAC X-2159 contact any of the more than 30 Varian/EIMAC Electron Tube and Device Group sales offices throughout the world.

Or the EIMAC Division of Varian
301 Industrial Way, San Carlos, California 94070.



4CX5000A
Shown for
size comparison.

How A Mini-Computer Could Take Over a Broadcast Transmitter

d. note: Now that the industry has moved another step toward automation (VHF remote control), the time is ripe to go all the way and use a computer to make adjustments. We'd like to report some actual experimental work—who will be first?

IN A PAPER, "AUTOMATION OF THE TRANSMITTING SYSTEM" presented at the IEEE—GB Broadcast Symposium in Washington, D.C. in September 1971, Donald E. Pauley of Smith Electronics surveyed in general terms the problems, advantages, and costs of converting a broadcast transmitter into a process control system, with a computer supplying remote control. The following is a brief digest of Mr. Pauley's presentation. (The full text is expected to appear in a future issue of the IEEE Transactions on Broadcasting.)

Operation and control of broadcast transmitters has not changed substantially in 40 years: the operator reads and logs meters periodically, makes an adjustment if some parameter is out of limit.

This monitoring-adjustment-logging function could be carried out better by a small process-control computer and, in addition, the computer could do extensive diagnostics during normal operation. The computer can do more than keep parameters within assigned FCC and overload limits; it can solve the control equations for "best" operation, optimizing desired characteristics of the process. One way the computer can do this is by direct on-line experimentation seeking to improve the operation iteratively.

The process requirements programmed into the computer can be broken down into: The primary goal of survival of the system, which includes the specified license parameters and overload parameters; and secondary goals and functions, such as maximize audio level, minimize noise and distortion, maximize transmitter efficiency, maximize life of components (especially power output tubes), logging, fault detection and identification, diagnostic messages, and operator signaling.

For analysis of control problems, the transmitter is broken down into subsections: the audio subsystem, radio subsystem, power subsystem and antenna subsystem. Each has its own set of parameters. Direct control of the antenna subsystem is complicated because all the parameters and variables are strongly coupled. Procedures for handling such variables are not simple, but they are well developed. They do require that the computer have somewhat more capacity than it would need for the other subsystems of the transmitter.

Some parameters cannot be measured directly and must be computed or implied. For example, power supply impedance and amplifier transconductance can be computed fairly simply, by a least-squares analysis. Other parameters, such as the radiator loss resistance, are more difficult. But the art is advancing rapidly, and process control of a transmitter already recommends itself as a great cost saver and improver of broadcast operation.

How much will it cost? That depends on how much the operator wants to accomplish with it. Costs on three levels are shown in Tables 1, 2, and 3. The small system should be adequate for a non-directional or FM station, with no diagnostic, and few high level functions attempted. The middle system should permit high level control of simple directional antenna systems and minimum control of the most complex transmitting system. The large system should be adequate for controlling a very complex AM station, and possibly an FM station and TV station in addition. All these costs assume that sufficient developmental work has been completed so that adequate standards are available, and hardware and procedures are type accepted by the FCC.

BM/E

**TABLE 1
COST OF SMALL COMPUTER CONTROL SYSTEM**

Computer	\$ 1,500
Data Storage	500
Interface	2,500
Sensors	2,000
Actuators	4,000
Programming	2,000
Teletype Console	1,000
Engineering Services	4,000
Total	\$17,500

**TABLE 2
COST OF MEDIUM COMPUTER CONTROL SYSTEM**

Computer	\$10,000
Data Storage	3,000
Interface	5,000
Sensors	4,000
Actuators	6,000
Programming	5,000
Teletype Control	1,000
Engineering Services	6,000
Total	\$40,000

**TABLE 3
COST OF LARGE COMPUTER CONTROL SYSTEM**

Computer	\$25,000
Data Storage	10,000
Interface	8,000
Sensors	8,000
Actuators	10,000
Programming	10,000
Custom Console	5,000
Engineering Services	10,000
Total	\$86,000

Test Signals for Monitoring Remotely Controlled TV Transmitters

By Charles W. Rhodes

Part II—The Modified Multiburst; Checking a Demodulator. The new composite signal, including the color bar, was covered in Part I.

WHILE THE MULTIBURST SIGNAL may, at times, be overworked, it remains a very useful tool for the transmitter engineer. The multiburst in §73.699, Fig. 13, includes the frequencies at which the rules specify amplitude/frequency response limits. The 4.10 MHz burst is to permit a sensible tolerance on frequency stability. Otherwise, the specification should be 4.18 MHz maximum. Either way they mean the same thing; that is, it should not exceed 4.18 MHz. The breezeway between successive burst permits ringing following a burst to decay before the next burst. In sharp cutoff systems, this is especially helpful following the 4.1 MHz burst.

Quadrature distortion in the demodulator reduces the amplitude of the bursts above 0.5 MHz as these are radiated as single sideband signals. The apparent gain loss above 0.5 MHz depends upon the demodulator's IF design. Great variety exists in the IF characteristics of available demodulators. Another consequence of quadrature distortion (in the demodulator) is axis shifting of the bursts above 0.5 MHz. As axis shift and frequency response measurements are important as regards the STL and transmitter, the multiburst signal of Fig. 13 was designed to minimize quadrature distortion in the demodulator. Quadrature distortion varies in square law fashion with p-p amplitude of s.s.b. signals at any given AC axis. It varies inversely with the AC axis as percent of sync tip carrier level. Thus, the bursts are all at 60 IRE p-p and at 40 IRE (50% carrier at peak of sync) AC axis. Figures 12 and 13 compare axis shift observed in a demodulator with and without sound traps ON. When switchable, these affect much more than just sound traps in some demodulators. Read the manufacturer's manual carefully.

Some quick insight into the effects of quadrature distortion can be gained by observing the multiburst signal as demodulated by the transmission line diode. Here, the demodulated video is essentially free of this form of distortion. Look at the axis shifting,

then check it with the station demodulator. The differences are much greater with the customary full amplitude type multiburst than with the signal of Fig. 13 (§73.699). Many engineers have used reduced amplitude multiburst in dealing with VTR's, microwave relays and transmitters so this is not a new concept. The response for full amplitude multiburst of one demodulator, sound trap ON, is shown in Fig. 14; sound trap OFF in Fig. 15. Comparing Figs. 13 and 15 or 12 and 14 shows the reduction in quadrature distortion (axis shift) with the reduced multiburst.

A typical monitoring setup requires a line selecting waveform monitor,[†] vectorscope (or other means of observing the relative phases of the test signal) and a color picture monitor. A possible arrangement is shown in Fig. 16 (R529, R520, R650, 140 and 147 Option O1 and a Gain Normalizer, Tektronix Type 137). The required test signals are inserted on Line 18 and 19 as detailed in Figs. 13-15 of §73.699. Noise or test signals on these lines (e.g. network VITS) must be *deleted*. At least one test signal generator,* deleter/insertor capable of meeting the requirements when used with a suitable color bar generator,** is available. These two units occupy 7 in. of rack space. The generators may be located wherever convenient. No front panel operating controls need to be manipulated during either color or monochrome operations. The VITS inserter/deleter may be bypassed from a remote location. In this mode, the program signal passes via a relay around the 147 circuitry. Failure within the 147 to gen-lock will automatically inhibit both VITS deletion and insertion until gen-lock is re-established.

The 147 may be placed in its PREVIEW mode to observe that the VITS will be inserted as desired

[†]For transmitter monitoring, it is desirable that the dc restorer in the waveform monitor works on the tip of sync. The Tektronix 529 is normally wired for backporch dc restoration. The manual shows how to rewire it for sync tip restoration, and this is highly recommended. The 520 vectorscope dc restorer works on tip of sync already.

*Tektronix Type 147
**Tektronix Type 140 (144, 146)

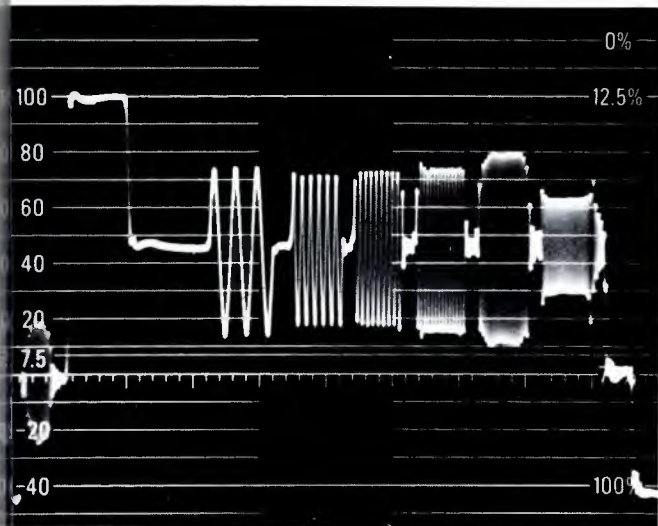


Fig. 12. Multiburst per FCC §73.669, Fig. 13, demodulated; sound trap ON.

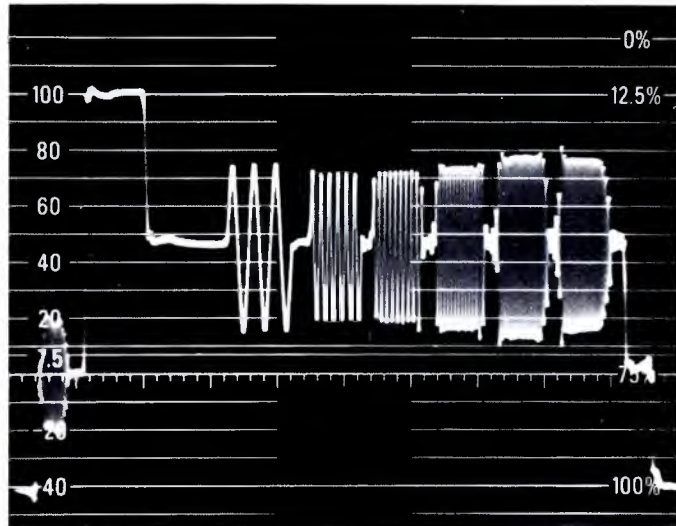


Fig. 13. Multiburst per FCC §73.699, Fig. 13, demodulated; sound trap OFF.

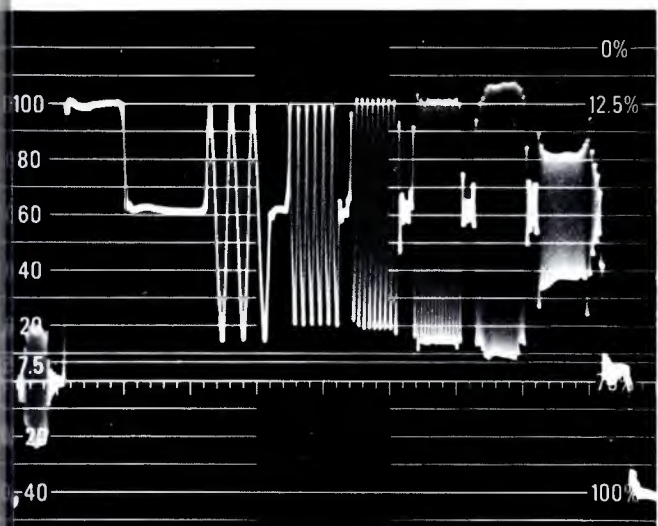


Fig. 14. Full amplitude multiburst demodulated; sound trap ON.

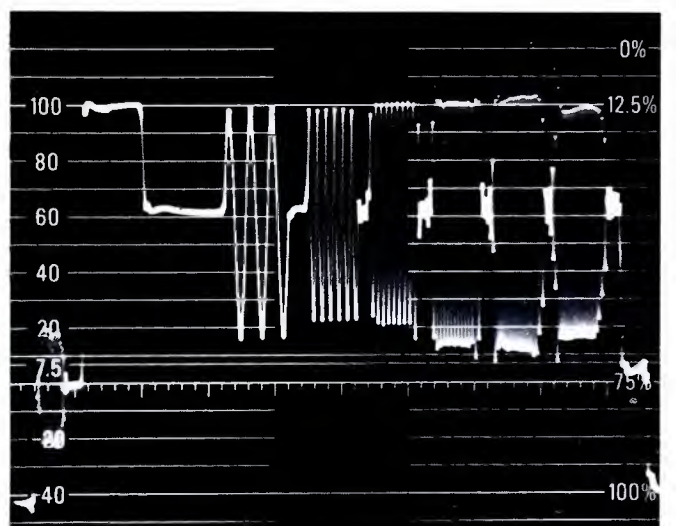


Fig. 15. Full amplitude multiburst demodulated; sound trap OFF.

into the PROGRAM OUTPUTS. They can be observed on the PREVIEW monitoring outputs in both PREVIEW and PROGRAM MODES. Only in the PROGRAM MODE will any VITS be deleted or inserted on the PROGRAM OUTPUTS. The PREVIEW-PROGRAM MODE may be remotely controlled.

The 147 provides the gen-locking function for the color bar generator. This provides two operational advantages, plus cost savings:

- 1) Correct timing, including color bar phasing (a one-time manual operation); and
- 2) Color bar chrominance inhibit when the program signal is monochrome, i.e. subcarrier output of the 147 is "killed" by lack of burst or lack of color gen-lock. This condition can be remotely indicated if desired.

A typical equipment interconnection diagram is

shown in Fig. 17. These test signals may be generated as full field test signals identified to the VIT signals. Thus, during a maintenance period, it is possible to verify that the transmitter handles the VITS in the same way as full field signals. This is very important because some processing amplifiers may not.

Checking up on the STL

This problem was considered to be very important as no operator will normally be available to monitor STL output. Several alternatives are open to the broadcaster in his use of Line 19, Field II. The rules provide that the composite test signal, Fig. 15 of §73.699, shall be radiated on Line 19, Field I. The same test signal may be radiated during Line 19, Field II, in one of the following ways:

- 1) It may be inserted at the input to the STL the

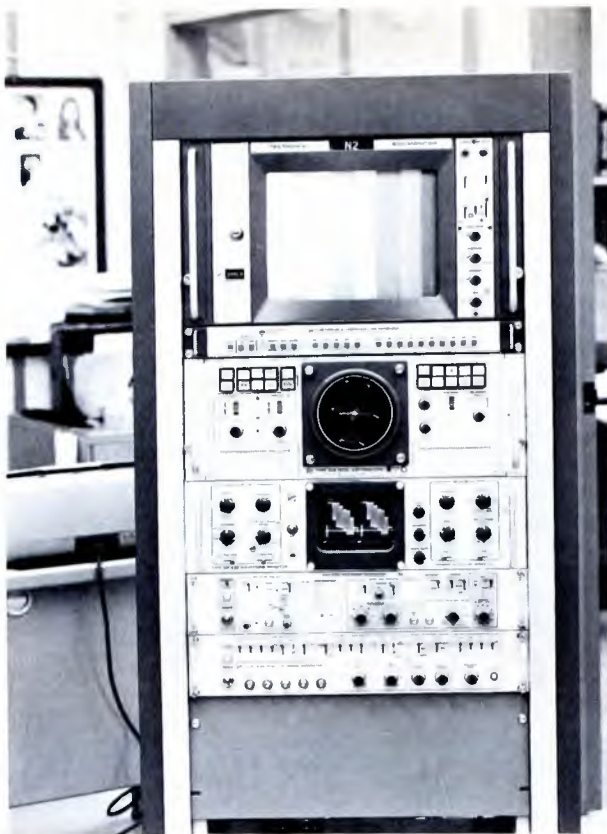


Fig. 16. Photograph of equipment.

"A" MONITORS FEED TO STL, PREVIEWS VITS
 "B" MONITORS DEMODULATOR OUTPUT

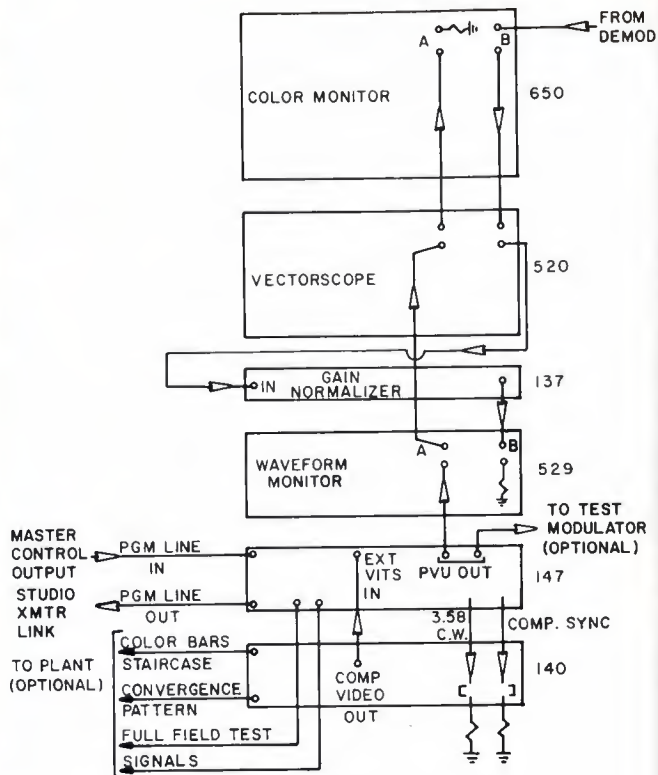


Fig. 17. Equipment interconnection system.

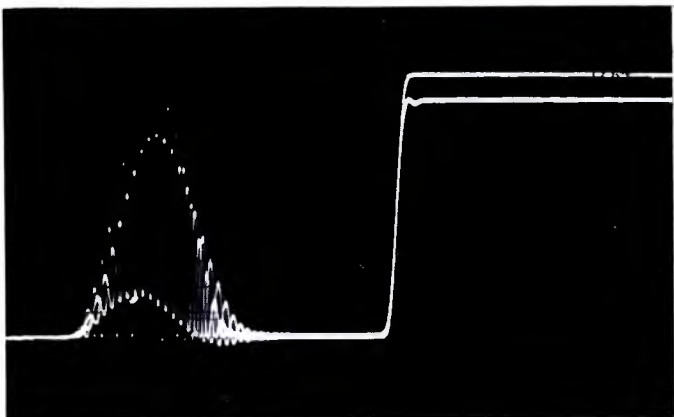


Fig. 18. 12.5T pulse and bar undistorted signal compared with distorted signal from STL. Note bar amplitude, chrominance loss and delay.

QUADRATURE DISTORTION IN DEMODULATOR

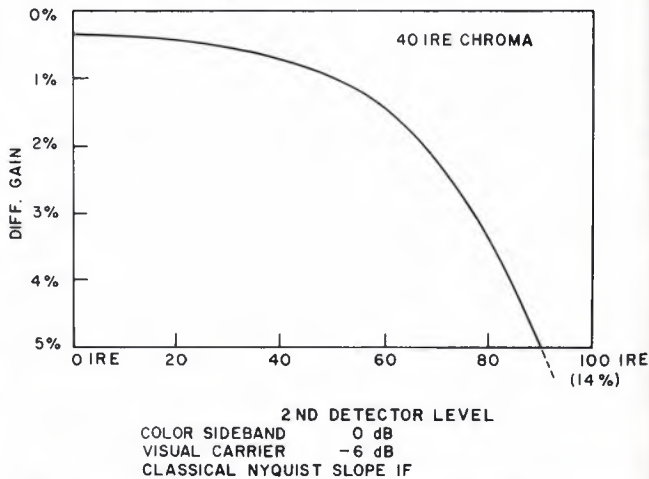


Fig. 19. Differential gain due to quadrature distortion in the demodulator.

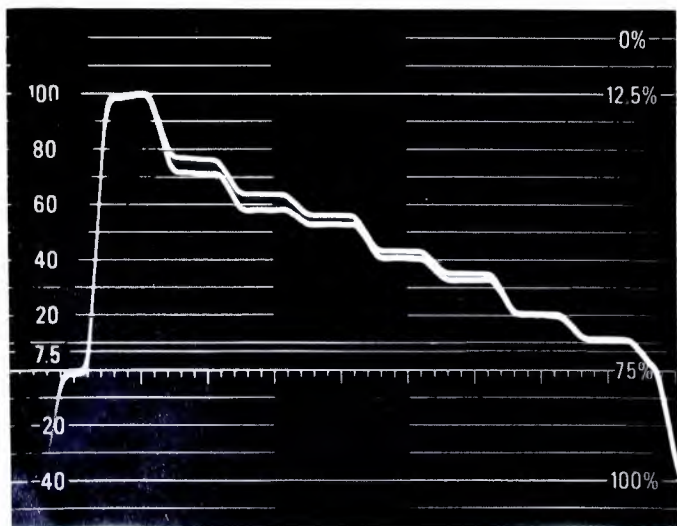


Fig. 20. Luminance component of color bars shifts when chrominance component is switched off. This may be quadrature distortion in the demodulator, or non-linearity in the transmitter.

same as it is during Field I (of course, the same VITS generator can insert the composite signal on either or both fields, same line); or

2) At the STL output, a second generator/insertor may be installed. It would be programmed to delete the test signal coming up on 19-II and insert the composite test signal as generated by the additional generator. The transmitter engineer will readily detect differences between the test signal observed on Field I and II; the Field I signal traversed STL, the Field II signal did not. That is, differences in the two waveforms are due to the STL. Distortions in both waveforms are isolated to the transmitter-radio path-demodulator configuration. Tektronix considers that two Type 147 VITS generators can duplicate each others' waveforms to very high accuracy and over a long period of time without maintenance—largely due to the digital timing circuits. It is possible to compare the Field I and Field II signals on a Tektronix 529 by a simple modification which disables its field selector. This is shown in Fig. 18.

The Commission left room for future test signals to be used on Line 19, Field II. The only requirement is that such signals have approximately the same APL as the composite signal of Fig. 15, 73.699.

It seems highly desirable to be able to localize STL difficulties without traveling to the transmitter site. The economic justification of the second VITS generator/deleter/insertor at the transmitter can also be rationalized by its usefulness as a source of test signals at the transmitter during maintenance visits, independent of the studio or condition of the STL. There is no requirement to have a second VITS unit at the transmitter. Even where a second unit is installed at the transmitter, the first unit must insert the same signal on Line 19 of both fields. It also seems desirable to provide remote bypass capability for the VIT signal generator/deleter/insertor located at the transmitter as its failure might interfere with transmission. The remote bypass relay can and should be controlled from the transmitter control point. Certain failures in the Tektronix 147 would automatically bypass the program signal around the equipment. Should the equipment at the transmitter fail, switching itself into bypass mode (or the operator remotely bypasses it), it would be desirable to indicate this condition. The subcarrier phase of the modulated sine-squared pulse may be offset from burst in each generator to identify it. For example, at the STL input the generator may be set to magenta phase as in Fig. 5, and, at the transmitter site it can be set to green phase as in Fig. 6.

Checking up on the demodulator

There are two ways to evaluate the demodulator performance.

By comparison of the off-the-air demodulator with the diode demodulator at the transmitter, much can be learned about the combined performance of the radio path and demodulator. Standing waves on the receiving antenna down-lead, or

frequency peaking of the antenna, or multipath reception will affect the demodulator's performance—more so on test signals than pictures. Sometimes what is taken for misalignment in the demodulator is due to these "perils of the radio path."

The demodulator may also be driven from a high quality CATV or similar modulator. Rohde & Schwarz offers a measuring modulator. As the demodulator must be operated with sound traps on, the test modulator must include the pre-correction filter required of transmitters. Otherwise, large distortions in the 2T pulse, 12.5T modulated sine-squared pulse and bar transitions will be observed through your demodulator.

It is conjecture on the author's part, but the new remote monitoring rules will probably stimulate the development of such test transmitters—perhaps by manufacturers of CATV headend equipment and/or instrumentation manufacturers. If the test transmitter is available, it can be fed test signals from an isolated output of the Tektronix 147. It is absolutely essential that such test transmitters operate at your exact picture carrier frequency. Demodulators are usually fixed-tuned and traps are very steep and sharp. We have seen 100 ns of group envelope delay due to small tuning errors.

Here are a few hints to help resolve transmitter vs demodulator problems. Many transmitters react differently to test signals as a function of APL. Demodulators are not APL sensitive. During maintenance periods, the Tektronix 147 can insert these test signals while its APL bounces automatically every 10 seconds or so from 10% to 90%. Distortions which change are in the transmitter (or STL).

Quadrature distortion is a distortion which is found in all demodulators using envelope type detectors. This distortion causes a form of differential gain which always decreases chrominance towards white (see Fig. 19). It also reduces the luminance of the color bars; especially the bright ones, yellow and cyan (see Fig. 20).

With a diode in the feed line to your transmitting antenna for demodulation, observe the change in the luminance portion of your color bar test signal as you switch ON/OFF both R-Y and B-Y chrominance. Your "diode" will not produce noticeable quadrature distortion. Your transmitter may cause either the same, or opposite effect upon the color bar luminance as chrominance is switched ON/OFF as shown in Fig. 20. We have observed the Y component of red and blue bars shift up with chrominance ON, or the bright bars shift down, or both. By not using the off-the-air demodulator at all, you can isolate these non-linearities to the transmitter or measure just how much distortion your demodulator contributes.

Checking up on the radio path

At your transmitter, the transmission line diode tells you what your transmitter feeds into the transmission line.

What is received at your remote monitoring point includes the cascaded effects of both transmission
continued on page 49

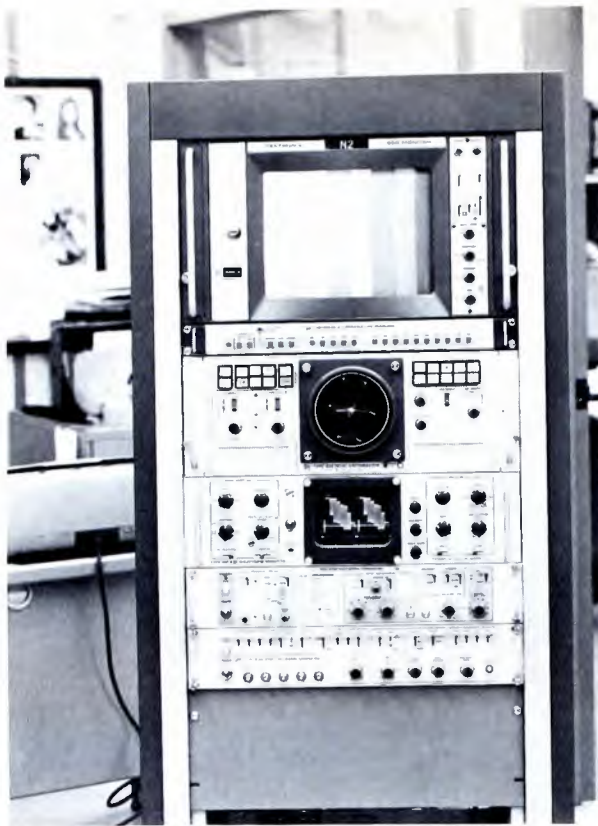


Fig. 16. Photograph of equipment.

"A" MONITORS FEED TO STL, PREVIEWS VITS
 "B" MONITORS DEMODULATOR OUTPUT

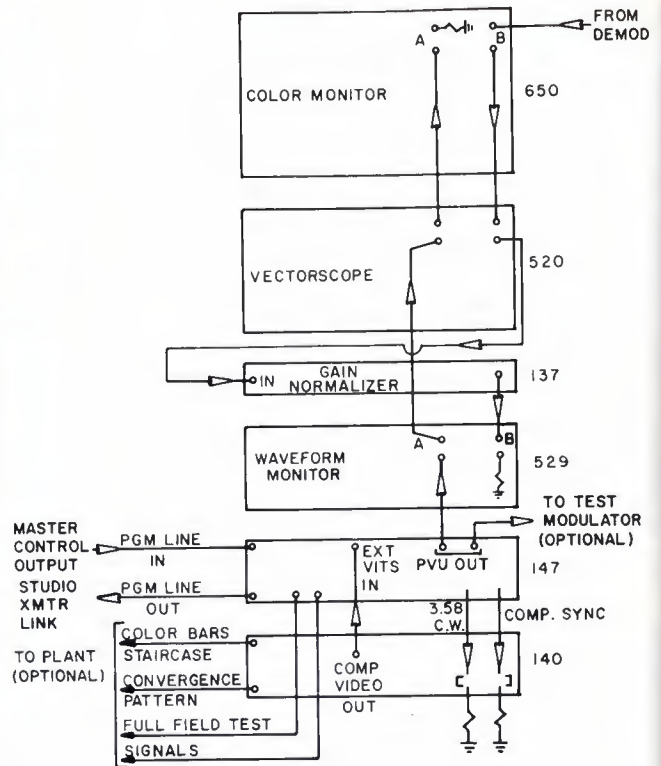


Fig. 17. Equipment interconnection system.


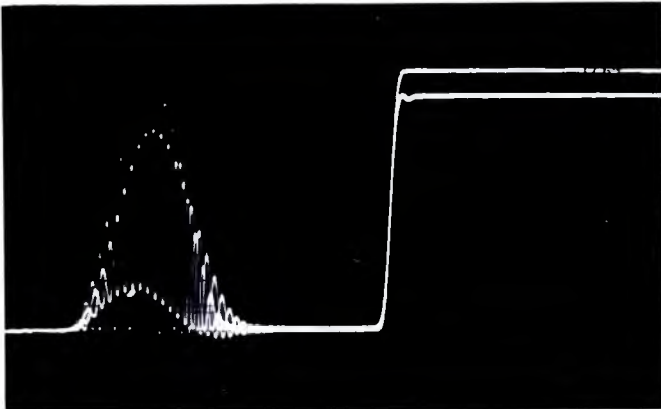


Fig. 18. 12.5T pulse and bar undistorted signal compared with distorted signal from STL. Note bar amplitude, chrominance loss and delay.

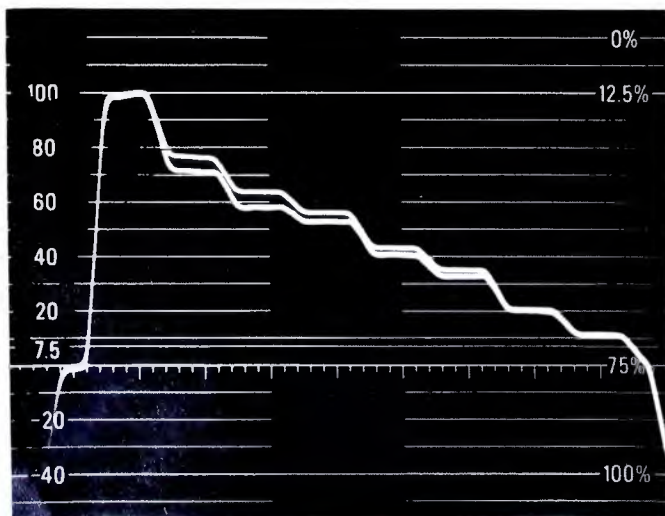

QUADRATURE DISTORTION IN DEMODULATOR

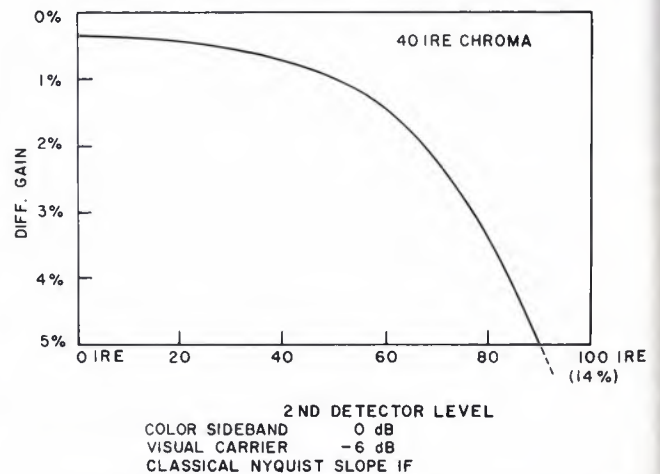


Fig. 19. Differential gain due to quadrature distortion in the demodulator.

Fig. 20. Luminance component of color bars shifts when chrominance component is switched off. This may be quadrature distortion in the demodulator, or non-linearity in the transmitter.

same as it is during Field I (of course, the same VITS generator can insert the composite signal on either or both fields, same line); or

2) At the STL output, a second generator/insertor may be installed. It would be programmed to delete the test signal coming up on 19-II and insert the composite test signal as generated by the additional generator. The transmitter engineer will readily detect differences between the test signal observed on Field I and II; the Field I signal traversed STL, the Field II signal did not. That is, differences in the two waveforms are due to the STL. Distortions in both waveforms are isolated to the transmitter-radio path-demodulator configuration. Tektronix considers that two Type 147 VITS generators can duplicate each others' waveforms to very high accuracy and over a long period of time without maintenance—largely due to the digital timing circuits. It is possible to compare the Field I and Field II signals on a Tektronix 529 by a simple modification which disables its field selector. This is shown in Fig. 18.

The Commission left room for future test signals to be used on Line 19, Field II. The only requirement is that such signals have approximately the same APL as the composite signal of Fig. 15, 73.699.

It seems highly desirable to be able to localize STL difficulties without traveling to the transmitter site. The economic justification of the second VITS generator/deleter/insertor at the transmitter can also be rationalized by its usefulness as a source of test signals at the transmitter during maintenance visits, independent of the studio or condition of the STL. There is no requirement to have a second VITS unit at the transmitter. Even where a second unit is installed at the transmitter, the first unit must insert the same signal on Line 19 of both fields. It also seems desirable to provide remote bypass capability for the VIT signal generator/deleter/insertor located at the transmitter as its failure might interfere with transmission. The remote bypass relay can and should be controlled from the transmitter control point. Certain failures in the Tektronix 147 would automatically bypass the program signal around the equipment. Should the equipment at the transmitter fail, switching itself into bypass mode (or the operator remotely bypasses it), it would be desirable to indicate this condition. The subcarrier phase of the modulated sine-squared pulse may be offset from burst in each generator to identify it. For example, at the STL input the generator may be set to magenta phase as in Fig. 5, and, at the transmitter site it can be set to green phase as in Fig. 6.

Checking up on the demodulator

There are two ways to evaluate the demodulator performance.

By comparison of the off-the-air demodulator with the diode demodulator at the transmitter, much can be learned about the combined performance of the radio path and demodulator. Standing waves on the receiving antenna down-lead, or

frequency peaking of the antenna, or multipath reception will affect the demodulator's performance—more so on test signals than pictures. Sometimes what is taken for misalignment in the demodulator is due to these "perils of the radio path."

The demodulator may also be driven from a high quality CATV or similar modulator. Rohde & Schwarz offers a measuring modulator. As the demodulator must be operated with sound traps on, the test modulator must include the pre-correction filter required of transmitters. Otherwise, large distortions in the 2T pulse, 12.5T modulated sine-squared pulse and bar transitions will be observed through your demodulator.

It is conjecture on the author's part, but the new remote monitoring rules will probably stimulate the development of such test transmitters—perhaps by manufacturers of CATV headend equipment and/or instrumentation manufacturers. If the test transmitter is available, it can be fed test signals from an isolated output of the Tektronix 147. It is absolutely essential that such test transmitters operate at your exact picture carrier frequency. Demodulators are usually fixed-tuned and traps are very steep and sharp. We have seen 100 ns of group envelope delay due to small tuning errors.

Here are a few hints to help resolve transmitter vs demodulator problems. Many transmitters react differently to test signals as a function of APL. Demodulators are not APL sensitive. During maintenance periods, the Tektronix 147 can insert these test signals while its APL bounces automatically every 10 seconds or so from 10% to 90%. Distortions which change are in the transmitter (or STL).

Quadrature distortion is a distortion which is found in all demodulators using envelope type detectors. This distortion causes a form of differential gain which always decreases chrominance towards white (see Fig. 19). It also reduces the luminance of the color bars; especially the bright ones, yellow and cyan (see Fig. 20).


With a diode in the feed line to your transmitting antenna for demodulation, observe the change in the luminance portion of your color bar test signal as you switch ON/OFF both R-Y and B-Y chrominance. Your "diode" will not produce noticeable quadrature distortion. Your transmitter may cause either the same, or opposite effect upon the color bar luminance as chrominance is switched ON/OFF as shown in Fig. 20. We have observed the Y component of red and blue bars shift up with chrominance ON, or the bright bars shift down, or both. By not using the off-the-air demodulator at all, you can isolate these non-linearities to the transmitter or measure just how much distortion your demodulator contributes.

Checking up on the radio path

At your transmitter, the transmission line diode tells you what your transmitter feeds into the transmission line.

What is received at your remote monitoring point includes the cascaded effects of both transmission

continued on page 49

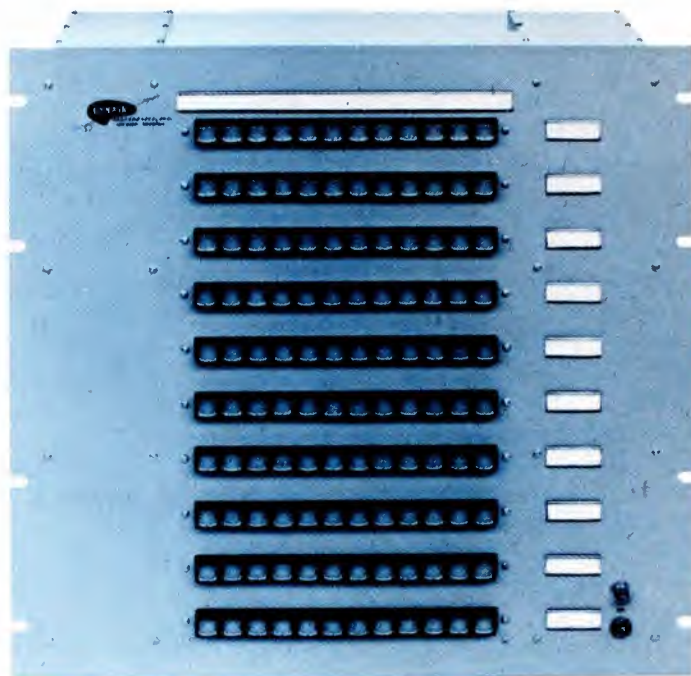

(Patch Cable Eliminator)

Now you can forget about messy patch cables and the tedious task of re-patching to change distribution. DYNAIR's Series-X Switchers provide pushbutton distribution of either 6 or 12 inputs to as many as 12 outputs. A high degree of input-to-output isolation allows any input to be switched to any or all outputs without loading the source.

Series-X Switchers are also available for simultaneous switching of video and audio, further simplifying distribution. All isolation amplifiers are silicon solid-state and full-broadcast quality. The audio and video amplifiers and the power supply are all plug-in modules which may be easily removed from the switcher for maintenance. A 12-MHz bandwidth and excellent differential gain and phase characteristics assure quality color performance.



Rear Panel

Wouldn't a Series-X Switcher solve some of your distribution problems? Write today for full details.

TYPICAL BASE PRICES			
Capacity	Video Only (Base Price)	Video and Audio	Panel Height
6 in, 3 out	840.00	1,575.00	6.0
12 in, 3 out	955.00	1,690.00	6.0
6 in, 6 out	1,455.00	2,625.00	12.25
12 in, 6 out	1,645.00	2,815.00	12.25
6 in, 9 out	2,070.00	3,675.00	15.75
12 in, 9 out	2,335.00	3,940.00	15.75
6 in, 12 out	2,685.00	4,725.00	21.0
12 in, 12 out	3,025.00	5,065.00	21.0

Other input/output configurations available. Options include lighted pushbuttons, bridging inputs, and sync-mixing.

DYNAIR

DYNAIR Electronics, Inc.

6360 Federal Blvd., San Diego, Calif. 92114
Telephone (714) 582-9211

Have you seen "Video Switching Techniques"? Yes No
Have you seen "Video Transmission Techniques"? Yes No
Please send information concerning Series-X Switchers

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Circle 111 on Reader Service Card

Upsurge in Discrete Four-Channel Stereo

THE FOUR-CHANNEL FRONT seems to be developing into a horse race between the proponents of matrix systems and a growing group who have cast their lot with discrete four-channel recording and broadcasting.

Among the various matrix systems there is a trend toward standardization, as noted in *BM/E*'s January issue. Moreover, one system—Columbia's "SQ"—now looks like the dominant matrix system with many professionals in the field judging it to be the most effective of those readily available.

But that does not mean that the period of technical competition in four-channel stereo is over, because at least two discrete systems, which as little as eight or ten months ago seemed well beyond the horizon, are now threatening to leave the starting gate at any moment.

The Dorren Quadracast FM system, described in the July 1971 issue of *BM/E*, has the strong support of station KIOI in San Francisco, which has petitioned the FCC for the right to use the system in more or less regular experimental broadcasts. Dorren uses a subcarrier of 76 KHz for the coding information that assigns program material to the four channels. That produces a total deviation, including sidebands, of 92 KHz, rather than the standard 75 KHz.

But the backers of the Dorren system say that they have the tests and analyses to show that there will be no interference with an FM station on the next channel, a main concern of the FCC about the system. Jim Gabbert, general manager of KIOI and a leader among the pro-discrete forces, points to studies showing that Quadracast has less sideband energy than two-channel FM by the present system.

The FCC, in answer to a *BM/E* query, would give no timetable for action on the KIOI petition. Incidentally, it is worthwhile to note again that use of a matrix system does *not* require FCC approval (since there is no change in the relevant characteristics of the transmitted signal.) Meanwhile, the Dorren system, just as this was written, got a trial by station CHFI in Toronto, Canada, and won a highly enthusiastic reception. A petition has been filed with the CRTC for permission to use the system in experimental broadcasts there.

The discrete method got big-company support from another direction. RCA, Panasonic, and JVC in November made a joint "progress report" to the trade press on the development of a four-channel multiplex disc, based on the disc system JVC has been showing for several years (and selling strongly in Japan). RCA and JVC said they were well on the way to solving the main problem holding up release of the system in this country—making the disc usable on two-channel equipment without damage to the four-channel information. All three

firms have supported the KIOI position on the Dorren system, Panasonic with a brief to the FCC endorsing the KIOI petition.

Jerry Orbach of JVC told *BM/E*, as we went to press, that the "breakthrough" on the disc problem has been made, with the four-channel disc thus much closer to marketability than was thought a short while ago. *BM/E* learned from other sources what must be, at least in part, the basis for this optimism. Lou Dorren, the Quadracast inventor, has further strengthened the position of discrete four-channel by inventing a greatly simplified decoder for the JVC disc system, a decoder that, moreover, makes the system work with *ordinary two-channel stereo pickups*. One of the difficulties with the JVC system cited by its opponents in this country was the need for a pickup with flat response to about 45 KHz. The advance information is that Dorren by some technical magic or other has modified or eliminated this requirement. No details were available at press time, but if the advance information on this is correct it is a "breakthrough" indeed, moving the discrete four-channel disc much closer to the market.


If and when the disc comes, it will affect the FM broadcaster by putting more pressure on the FCC to take some action on the Dorren system, the only discrete system now actually before the FCC. The presence of RCA in the discrete-disc camp means that the disc would bring with it a wealth of program material, not only from RCA but from other recording firms that would follow RCA's lead.

However, the well-known action rate of the FCC clearly makes it a dubious policy for any FM broadcaster to abandon using a matrix system at the present time, especially if matrixed quad broadcasting has stirred strong listener response. The good matrix systems do remarkably enhance the listening experience. With many kinds of program material the difference in results between a matrix system and a discrete system may be very subtle or non-existent: it is far from a clear-cut case of "inferior" and "superior," and the statements of some of the contestants in the field, on both sides, suffer from oversimplification.


However, it does seem that a discrete system, if and when it becomes practicable, *will* do more things than a matrix system. The valid theory of matrix systems has been that the quite subtle limitations of matrixing, as compared with discrete, were more than worth accepting for the greatly simplified engineering and ready compatibility of having only two channels in the transmitted signal or on the recording medium. If the engineering for discrete systems is developed to the point of cost, complexity, and compatibility comparable to those of matrix systems, the whole theory will need re-examination.

BM/E

What San Francisco's Channel 5 looks like from San Jose

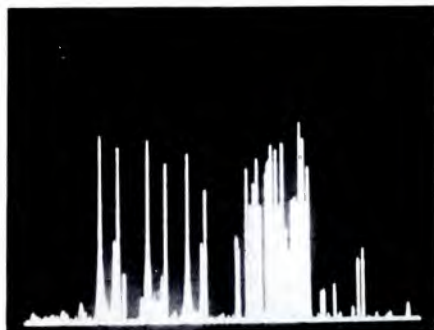

Signals received using an RF amplifier front end

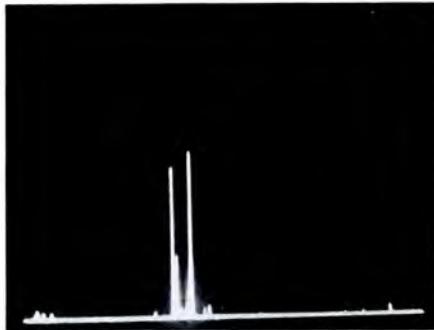

Signals received by a TFT Model 701 TV Monitor (no RF amplifier)

The test results shown here tell the story—no RF amplifier means greater accuracy. Both photos are unretouched and were made under identical conditions with a HP 8555A Spectrum Analyzer: vert. = 10 dB/div.; hor. = 5 MHz/div. The test: to monitor San Francisco's Channel 5 from 40 miles away.

The photo on the left shows the result using a 20 dB RF amplifier. You not only get the channel you're after, you also get other stations and intermodulation products.

The photo on the right shows the performance of a TFT Model 701 (no RF amplifier). You pick up only what you want to measure—the visual and aural carriers, plus the color sub-carrier. And TFT monitors—with advanced receiver design—are the only ones that give you this kind of off-the-air performance—on both UHF and VHF.


You can also get this kind of accuracy in an Aural Modulation only unit: Model 702. It fits right in with existing frequency monitoring systems.

So, if you want "3rd Generation" accuracy in TV monitoring, specify TFT. More than 40 stations have installed TFT instruments—for both local and remote monitoring—since introduction at the '71 NAB. And the number's growing all the time. We'll be glad to send you a current list.

For full specifications and/or a demonstration on your frequency (it takes only 20 minutes), call or write TFT. Representatives throughout the U.S. In Canada: Tele-

Radio Systems. In Mexico and Central and South America: Carvill International Corp.

The TFT Model 701 carries FCC Approval No. 3-187; Model 702 carries FCC Approval No. 3-189. Both comply with all relevant FCC requirements for local and remote monitoring.

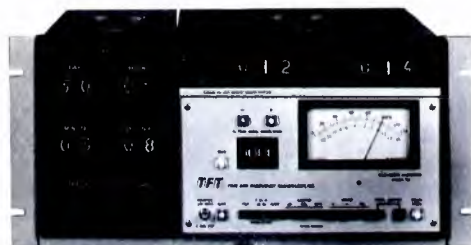

Model 701 rack mounted with Model 705 Automatic Logging Adapter and Digital Clock.

TFT TIME AND FREQUENCY TECHNOLOGY, INC.
2950 SCOTT BLVD., SANTA CLARA, CA 95050 (408) 246-6365

Circle 112 on Reader Service Card

AUDIO FILE:

FOR BETTER IDEAS
FROM AUDIO ENGINEERS

The automation story is now familiar enough, with the new refinements that keep coming along mostly fitting into a pattern based on a separate logic unit that coordinates and controls the many parts of the operation.

But automation built right into an audio console is something else again. When *BM/E* read the description of a series of consoles offered by Broadcast Recorders of Fremont, California, we put in a call to Duke McLane, operations manager of that firm. Mr. McLane said that, as far as he knew, Broadcast Recorders' were the only automated audio consoles now available (a prototype was reported under construction at Fairchild).

Called Program Logic Audio Control, the system is essentially a combination of audio mixing with automation logic. The operator can program a cluster or sequence of commercials, identifications, and other recorded items simply by punching in a pre-set button for each of the sources. The console will take it from there at the push of the start button, activating and mixing in each of the pre-programmed sources in the same order in which the pre-set buttons were pushed. The operator is free to prepare newscasts, plan future program segments, or use his time in other creative ways.

At the same time, said Mr. McLane, the console maintains full control flexibility and person-to-listener contact, important in successful "personality" programs.

The on-air result is a very tight program flow through the automated sequences. That seems to *BM/E* a good example of automation in the service of a more responsive, easier-handled operation. Six of the consoles, Mr. McLane reported, are being installed by KRLD in Dallas, Texas, as part of a comprehensive "logification" at that station.

Contributions from readers are welcome.

BM/E

Presenting the first broadcast camera to see reds as they really are—while dramatically reducing studio and remote lighting requirements



The IVC-500 Color Camera is casting teleproductions in a new light. The secret is the new one-inch silicon diode tube in the camera's red channel. It's the tube most other cameras wish they had but don't (because they are designed for the older 30 millimeter tubes). For the first time all the elusive shades of red can be captured. And we've kept Plumbicon* tubes where they perform best—in the green and blue channels. The super-sensitive silicon diode tube lets the IVC-500 operate in 100 foot candle settings rather than the normal 200, producing beautiful pictures. Light and air conditioning bills drop while performers' comfort increases in the cooler environment. Strong on remotes, the IVC-500's outdoor or arena colorimetry looks like studio quality even at 10 foot candles. It's compact and highly portable. In comparative demos against more expensive broadcast cameras, chief engineers invariably identify the IVC-500 as having superior colorimetry. A true broadcast camera at a price you can afford. Write or call to arrange for a demonstration.

*Trademark of N. V. Philips

the 500 from . . .

 **IVC**
International Video Corporation

We're bringing new thinking about color recording to broadcast television (and more stations every month are helping us prove our point)



It's happening in broadcast markets from the West Coast to New York. From Canada to Mexico. For the first time broadcasters have a realistic alternative to high-cost quadruplex color recording. It's the versatile IVC-900 Series Broadcast Color Videotape Recorder with Time Base Corrector. A natural for network delay, sports programming (3½ hour recording time), locally produced origination or commercials, including both remote vans and studio production work (playback synchronously through switcher/fader, special effects generator)—even dub to quad if required. Initial investment far less than for quad machines. Head replacement costs are reduced by a factor of five. Tape costs are one-third of quad in normal use. It all adds up!

also available in case and rack mount

the 900 from . . .

 **IVC**
International Video Corporation

IVC SALES AND SERVICE OFFICES

190 North Broadway
White Plains, N.Y. 10603
(914) 761-7820
Bob Henson

35 Executive Park Dr., N.E.
Atlanta, Ga. 30329
(404) 633-1462
Dennis Christensen

1920 Waukegan Rd.
Glenview, Ill. 60025
(312) 729-5160
Coyle Dillon

30 Baywood Rd.
Rexdale, Ontario, Canada
(416) 749-7539
Emil Adamyk

675 Almanor Ave.
Sunnyvale, CA 94086
(408) 738-3900
Dick Reilly



CME

CABLE MANAGEMENT / ENGINEERING

MARCH 1972

Special Report The Services of Cable TV Analyzed

The wired city is a first step toward the wired nation. But is the wired city, with its promise of extra, on-broadcast services, feasible economically? The new FCC cable TV rules nudge the industry a little closer to finding out. They call for a minimum of 10 channels in the top-100 markets and two-way capability. For each broadcast signal carried, an equivalent channel must be made available for non-broadcast use. Three are reserved for programming—one for public access, one for educational, and the third for local government use. Other channels can be devoted to other uses. They can be leased to anyone who thinks they might get an adequate return on their investment in either social or monetary terms. Leasees who will offer pay cable channels are quite certain they're on the right track from a money-making point of view, and will attempt to prove so this year. Beyond that, no one knows for sure what services will be of value. Several cable operators do hope to find answers in experiments involving extra service: Theta Cable (El Segundo, California), TeleCable, (Overland Park, Kansas), Continental Transmission, (Reston, Virginia), and CAS Manufacturing (Irving, Texas), are those that have announced experiments so far.

For the most part though, cable operators and their backers are afraid to put up risk capital for such speculative applications. This caution has perturbed the many public study groups who see cable as a necessary information transfer delivery system to help solve social problems of all sorts—

education, jobs for the unemployed, medical services, crime protection, even dispersing populations. Those with the biggest social vision are more impatient with the slowness of the communications revolution as it is now modulated by private-profit interests. They would like to see some form of non-profit public or municipal ownership evolve with the assumption such a group could issue bonds to construct the ideal system. Inefficiency is not a major concern. These advocates see some evidence that there has to be some net gain for the community if 40-channel systems exist. For example, in the recent Rand report prepared for the Dayton Miami Valley, the commuter colleges could go on cable four days out of five to save students as much as \$100 a year on transportation alone—not to count potential savings in buildings and campus land.

Others feel the technology isn't far enough along to justify such risk-taking. And, it now becomes clear, they say, that if a portion of the money given out by foundations to study cable were invested in perfecting the technology instead (such as subscriber response units), or actually building a demonstration system, society would be further ahead at this point in time. Some, such as the Arthur D. Little Company, feel systems capability, as proposed so far, is limited and may be obsolete soon—switched systems should get a test, ADL says. Certainly some of the hopes for cable potential do justify some funds being spent now—if the private money market isn't interested, then some seed money from various federal agencies could be wisely invested now.

What can, or possibly should, be done begins on the following page.

quiries and responses. The upstream channels must be multiplexed to distinguish signals from each individual subscriber. The upstream and downstream channels must be kept separate to avoid interference between them.

Multiplexing can be accomplished by separating signals in frequency, time, or space. In frequency division multiplexing (FDM), a given bandwidth is divided into smaller frequency ranges as is now practiced in cable TV, Fig. 2. Time division multiplexing (TDM), divides a channel into separate time slots for each signal; the time slots are then interleaved together, Fig. 2. Baer points out that computer data and other digital messages are most naturally handled in this manner, although TDM techniques are increasingly being applied to telephone voice transmission. Signals can also be physically separated in space (SDM); that is, sent over entirely different transmission lines. The discrete cables used in the Discade and Rediffusion systems are examples, although Discade combines both by putting several FDM signals on one cable.

These three multiplexing techniques can be combined within a single cable network. The transmission cost of a service will depend in a large part on the amount of information transferred.

Baer says, "Some services, like simple opinion polling, demand only a single bit—yes or no—response. Others, like remote shopping, may require that a few alphanumeric characters or several tens of bits pass upstream from subscriber to headend. Such data or message services, multiplexed by TDM techniques, require only about 100 Hz per subscriber upstream. In contrast, a voice channel requires 3-4 KHz and standard color video transmission uses 6 MHz. Thus color video origination by one subscriber might require more upstream bandwidth than returning digital data from 50,000 households.

"Downstream voice, video, and data can be broadcast to all subscribers or individually addressed to one or many. Information retrieval, such as stock market quotations or reservation services, may involve a display of several lines of characters on the individual subscriber's screen. At six bits per character, and six characters per word, a line of eight words would require about 300 bits, including error checking and control bits. A standard 19-inch television screen can accommodate about 12 lines, or 3600 bits, in each frame for comfortable reading. A still picture on the television screen contains about 250,000 bits of information."

Baer uses the term "narrowband" to describe services requiring transmission bandwidths less than 3 KHz; "voiceband" for 3 to 4 KHz; "wideband" for 4 to 1000 KHz; and "broadband" for bandwidths above one megahertz.

Some terminal equipment has not yet been developed for home use or, at best, is expensive. There is no home facsimile terminal equipment for newspaper delivery. Single-frame storage devices are being developed in several places, but are relatively expensive. (The Mitre report, following, has more on this subject.)

Baer says software ultimately is likely to be as critical as terminal hardware in determining the cost and feasibility of two-way subscriber services. He defines software in the context of cable communications as including, ". . . not only the computer programming necessary to operate a two-way network, but also the computer application software, video programs, and other media material such as pictures, audio recordings, and text needed for each specific service." Baer adds, "Every two-way service, from home shopping to interactive TV games to automated library reference, will require extensive software development. And for many services—such as alarm monitoring—the communications link will represent only a small fraction of total cost."

Just as computer designers and users underestimated considerably the cost of creating system hardware for time sharing, one might expect the software costs of two-way cable services to run higher than expected—exceeding the cost of the hardware.

New cable services grouped according to their application for a network are shown in Table 1.

The extra hardware for additional one-way broadcast services includes a converter for extra channel reception or two cables and an A-B switch. This adds \$30-\$60 per subscriber. Limited access or subscription channels call for special encoders and decoder units which add another \$25 to \$70 per subscriber. Although documentation transmission at high speed sounds appealing, it is not likely to be a viable service. An average 40,000-word newspaper could be recorded in about 13 seconds on videotape (30 frames per second and 100 words per frame). A frame-by-frame videotape recorder would cost upwards of \$1000 and the address decoder and logic circuit to control the recorder might add another \$100. Since frame-by-frame viewing is not desirable, a hard copy printer would be required. As much as 3500 words per minute over a 240 KHz channel can be scanned and printed by the Xerox LDX system, but this equipment leases for over \$1500 *per month*. Newspapers produce one page per customer for about one-third to one-half cent. This low cost is not envisioned by facsimile developers. Thus only the business user is a prospect for such a service.

Narrowband subscriber response services are generally those that send a few digits of information to the central facility. Such a system could also turn switches on or off remotely at the subscriber's location.

Polled narrowband response services require a control scanner and the communication controller can be a standard minicomputer, Fig. 3. The computer selects the addresses to be polled and the function to be queried according to programmed instructions.

Baer says, "The basic subscriber terminal, would include a wideband receiver and demodulator tuned to accept downstream polling signals, and a decoder to compare addresses received with its own address. If the addresses match, the subsequent message is sent on to the control logic unit; otherwise the mess-

age is ignored. Responses from the subscriber's push-buttons or keyboard, or from other devices, are assembled by the logic unit, encoded in digital form, and transmitted upstream at the appropriate frequency and sequence. This type of narrowband response subscriber terminal is estimated to cost upward of \$300 at the present time, but the cost should drop to \$100 to \$250 in production quantities of tens of thousands."

To avoid the limitation of only sending data upstream, voice, or possibly video channels, are needed. The telephone could be used as the link, but this is generally an inconvenience.

Baer describes what is needed: "The simplest cable system approach to voice feedback would be to have one or more shared 4 KHz channels (FDM) available for upstream voice response in addition to the channels for subscriber return data. A student would use his digital response unit to signal the headend that he wanted to talk to the instructor. when his turn came, he would be notified (by a light or audible signal) and his microphone-speaker unit would be turned on by headend command. Following his conversation, the channel would be freed for another subscriber's use. The same procedure could be used for shared video response using a 6 MHz upstream channel.

"The cost for the subscriber's microphone, speaker, modulator, frequency converter, enable/disable switch, and associated logic would at present be \$50-\$100 over and above that for the digital response unit. The cost would be expected to drop by a factor of two if several thousand units were purchased.

"A cheap black-and-white camera, modulator, and associated equipment would today cost about \$1500 at each location."

Permitting the subscriber to *initiate* requests for service adds immensely to the range of services

possible. Cable subscribers could make a request using a telephone-like pushbutton device or a full alphanumeric keyboard.

Baer describes how this would work: "A full list of services available and their access codes could be sent to each subscriber or displayed on his television screen. The subscriber's request would be processed by the headend computer and referred to the appropriate information source. When the requested information was located, it would be sent back to the headend, tagged with the subscriber's address, and then transmitted downstream over the cable network to him. The headend computer would function, in effect, as a switch connecting the subscriber to the information source.


"An information retrieval system, however, would require a larger computer and more storage capacity at the headend than is needed for subscriber response services. Moreover, developing the computer software for such a system is far from easy. In the past, many millions of dollars have been spent each time a new multiprocessing system has been built. And there are, at present, no user-controlled systems that can serve several thousand terminals simultaneously, as would be contemplated for cable television subscribers.


"Requests for information such as stock prices, bus schedules, locations of health care centers, and the like, would generally require answers of 500 characters or less. A small strip printer, probably available for less than \$100, would provide a simple home output device. Still, it is more likely that the response would be displayed directly on the subscriber's television receiver. This can be done either by adding an alphanumeric generator to the subscriber data terminal, or by transmitting a single frame downstream for recording and display as a still picture on the screen. The latter technique, known as "frame grabbing," "frame snatching," or "frame

Table 2. Added Cost Of Two-Way Transmission For a 200 Mile Cable System

Two-way Option	Added Cost in Dollars			Total Cost	Cost Per Mile
	Trunk	Feeder	Taps and Drops		
1. Wire pairs	17,000	36,000	25,000	\$ 78,000	390
2. Single cable FDM	41,000	125,000	0	166,000	830
3. Separate cables	84,000	191,000	50,000	325,000	1,625
4. Separate trunks, FDM on feeders	84,000	125,000	0	209,000	1,045
5. Switched distribution system	—	—	—	425,000-900,000	

Fig. 3. Block diagram of computer and interface equipment at headend for subscriber response (from Mitre report).

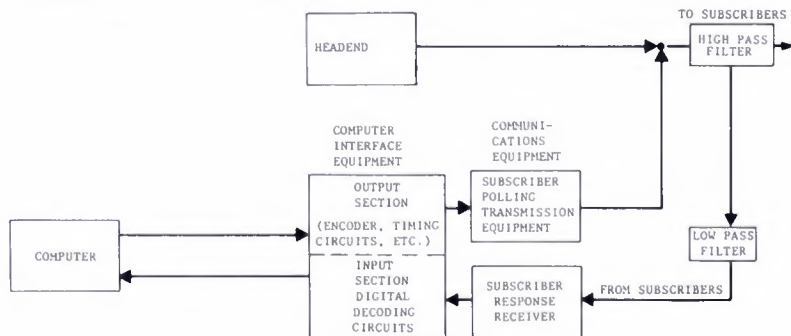

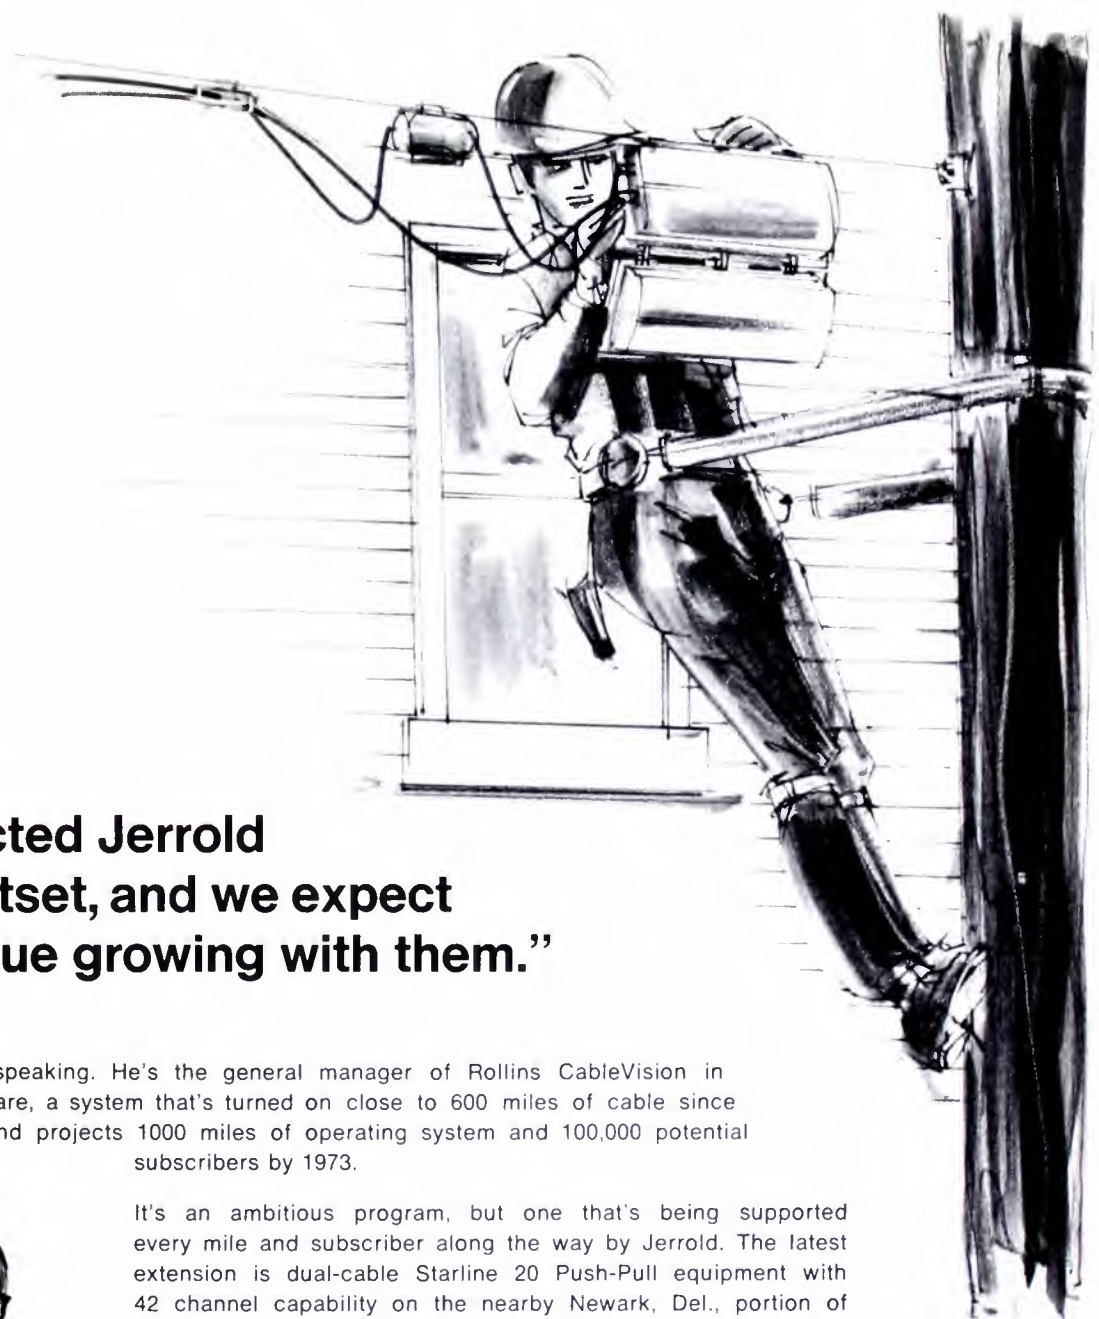

“We selected Jerrold at the outset, and we expect to continue growing with them.”

That's Tom Bird speaking. He's the general manager of Rollins CableVision in Wilmington, Delaware, a system that's turned on close to 600 miles of cable since November 1969, and projects 1000 miles of operating system and 100,000 potential subscribers by 1973.



It's an ambitious program, but one that's being supported every mile and subscriber along the way by Jerrold. The latest extension is dual-cable Starline 20 Push-Pull equipment with 42 channel capability on the nearby Newark, Del., portion of the system.

“We decided to take each step with the best equipment we could get,” Bird explained, and Rollins CableVision has done just that since 1966 by selecting Jerrold equipment and Turnkey service.

Results to date have proven the Rollins decision correct.

“Experience has taught us that the confidence we placed in Jerrold by delegating turnkey system responsibility to them while we concentrate on the promotional efforts for new subscribers makes a lot of sense. It certainly allows us to move faster than if we tried to handle all aspects of this business ourselves.”

Jerrold.
The sure decision in CATV.

FIRST IN CATV



a GENERAL INSTRUMENT company

EASTERN OFFICE
401 Walnut St.
Phila., Pa. 19105
(215) 925-9870
TWX 710-670-0263

SOUTHERN OFFICE
1 Perimeter Place, Suite 101
Smyrna, Georgia 30080
(404) 432-3102
TWX 810-766-4895

MIDWESTERN OFFICE
1334 Atlantic Ave.
N. Kansas City, Mo. 64116
(816) 842-1130
TWX 910-771-3180

WESTERN OFFICE
1255 Veterans Blvd.
Redwood City, Calif. 94063
(415) 365-5200
TWX 910-378-5418

JERROLD ELECTRS. CANADA
60 Wingold Avenue
Toronto 395, Ontario
(416) 781-5638
Telex 0621-9797

Circle 150 on Reader Service Card

stopping," permits displays of pictures, charts, and drawings as well as alphanumeric characters.

"Functionally, a frame stopping device contains the same sort of receiver and address decoder as a subscriber data terminal, plus electronic or magnetic storage to record a single frame, and a control unit for recording and displaying the frame on a standard television receiver. None of this is technically difficult, but frame storage still is relatively expensive." Baer points out that the Mitre Corporation in Reston, Virginia, has developed a terminal for computer-aided instruction and employs an inexpensive helical scan videotape recorder for frame storage (*CM/E*, October, page 11).

A capability that permits one subscriber to communicate with another (point-to-point), requires a switching center as does the telephone system.

Message switching need not be done in real time. The hub processor serves as a buffer and can load messages on the system with great efficiency.

The subscriber terminal would be functionally similar to that for polled, narrowband responses, with the addition of some buffer memory and a keyboard printer. Using an inexpensive teletype printer, the terminal might cost roughly \$800 to \$1000.

Real time communications links between two or more points can be most easily handled on a cable network by assigning special frequencies for these services. Separate frequencies would be needed for upstream and downstream signals. The caller's signals would go upstream to the headend, be converted to the corresponding downstream frequency, and then be transmitted downstream to the receiver. Alternatively, separate cables could be used for upstream and downstream signals. Some users might be given exclusive use of a frequency band—much like a closed circuit television system. For example, a police department might link all municipal precinct stations for facsimile and two-way video transmission.

Baer points out that to accommodate all of the above services, "... a cable subscriber's terminal might include a large color television receiver, a frame-stopping device for alphanumeric character

and still picture viewing, a video recorder with enough storage capacity for feature films or several volumes of text, a facsimile receiver, a printer for messages and data, a full keyboard for message entry, a camera and microphone for video and voice communications, links to sensors and appliances, and a sophisticated control unit. Although each of these components already is technically feasible, most are simply too expensive to see wide implementation on cable television systems in the next five or even ten years."

A comparison of estimated terminal costs for the several groups of new services is shown in Fig. 4 for the years 1971 and 1976.


Assuming \$15 to \$20 a month represents some upper limit most customers will pay, then the capital cost to provide these services must be less than \$600 per terminal. Thus, subscriber-initiated services are not likely to be feasible for the next five years.

Baer does feel narrowband subscriber response services can be of value, and he thinks audience counting is one of these. Audience counting will be of value to local spot advertisers and for programmers who want to learn something about audience size for specific instructional materials, community public service, etc. Cable is meant to service smaller specialized audiences and current sampling techniques are not suitable to measure viewing with any degree of precision.

Direct viewer response such as remote shopping and interactive programming, market surveys, and instructional TV with feedback will certainly all be tried in the next few years. They must be viewed as promising until proved otherwise.

Subscription TV is the service most likely to achieve early success. While meter reading won't be valuable unless there is heavy penetration, automatic adjustment of total utility load by selective on-off switching of subscriber appliances is. Baer reports: "The Detroit Edison Company has experimented with radio-controlled switches costing about \$45 each for consumer water heaters. The consumer receives a lower rate if he agrees to let the utility disconnect one of his two water heater elements

Fig. 4. Subscriber terminal costs for new communication cable services.

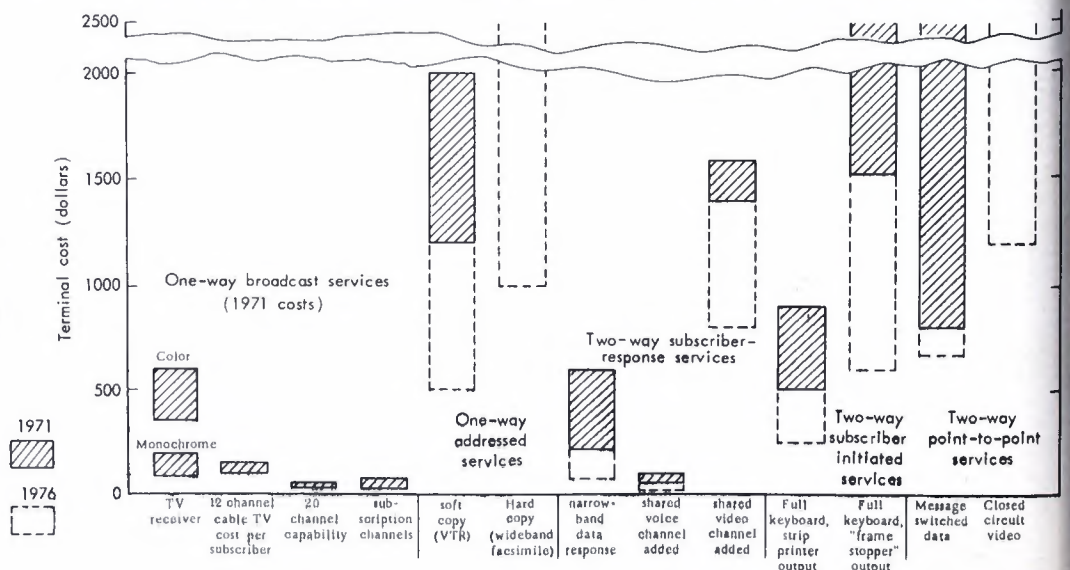



AML delivers QTP*



The name of the CATV game is delivering ***Quality Television Pictures** to your subscribers. And we can deliver them better than anyone else. Higher quality signals, with less noise and distortion than any other multi-channel signal delivery system.

And we can prove it!

No other system can duplicate the performance of Theta-Com AML. Before groups of CATV system operators, we tested a complete system - a 16 channel, 20 mile AML system feeding a 32 amplifier cascade operating through temperature extremes in our environmental test chamber. The results prove that performance averaging better than 45 dB signal-to-noise ratio with synchronous cross-modulation 57 dB down can be achieved at the end of a 25 trunk amplifier cascade. Interested? Call (213) 641-2100, or write us at 9320 Lincoln Boulevard, Los Angeles, CA 90045, or call our nearest Regional Sales Manager.

Northeast	Marty Moran (609) 871-1600	Central	Terry Peery (303) 739-1061
Southeast	Dick Walters (404) 252-6197	Western	Ben Forte (415) 462-1333

 **THETA-COM**

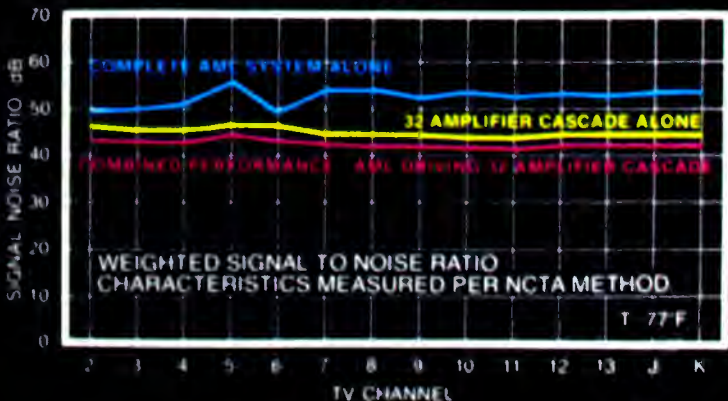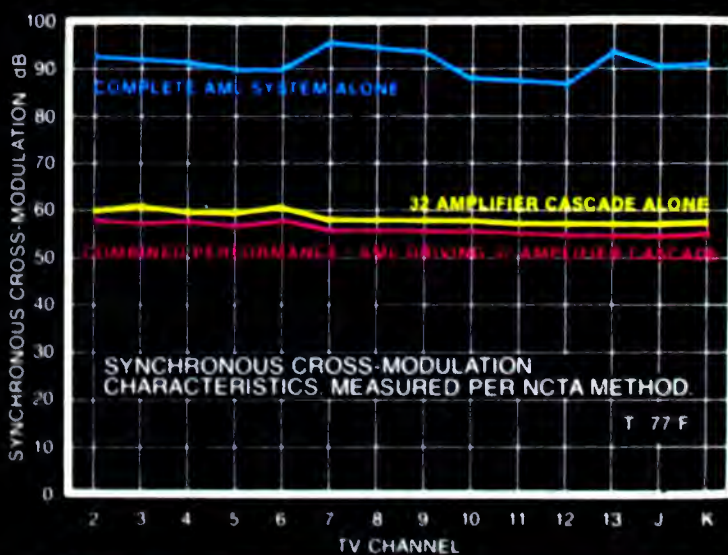

© 1987 THETA-COM of California

Table 1. Estimates Of Incremental Increase In Penetration By Types Of Service Added, For WCTS Telecasting Net

Type of Service	Estimated % Increase in Penetration
For a fee of \$3.50 per month per subscriber for services on first cable	
1. Conventional One-Way	
<ul style="list-style-type: none"> Improved DC and Baltimore TV Signals Imported TV & Cable Signals Mechanical Services Local Origination 	25% to 29% penetration, without imported signals, with an increase to 32% to 36% with imported signals
2. Additional One-Way	
<ul style="list-style-type: none"> Innovative Programs Occasional Exclusive Sports Programs or Movies Instructional Programs Public Information Channel Subscription Channel Channels-for-Lease CCTV and Facsimile Point-to-Point Net Origination 	A 24% to 40% increase, giving penetration of 56% to 76%
For an additional fee of \$3.00 per month per subscriber for services on second cable	
3. Limited Two-Way	
<ul style="list-style-type: none"> Interactive Entertainment Interactive Education Preference Polling Social Services Video Library and Facsimile Shopping Services Banking and Credit Services Channels-for-Lease Alarms Point-to-Point Net Originations 	63% to 78% penetration for the second cable
4. Full Two-Way	
<ul style="list-style-type: none"> CCTV and Facsimile with Manual Switching at Headend (no terminals supplied) Point-to-Point Net Originations 	A 2% increase, giving penetrations of 65% to 80% for the second cable
For an additional fee of \$2.00 per month per customer for utility services and maintenance	
5. Utility & Maintenance Services	
<ul style="list-style-type: none"> Meter Reading Automatic Billing Selective Load Control Load Monitoring Leak Detection Monitoring Output Levels of Amplifiers, etc. 	100% penetration for second cable

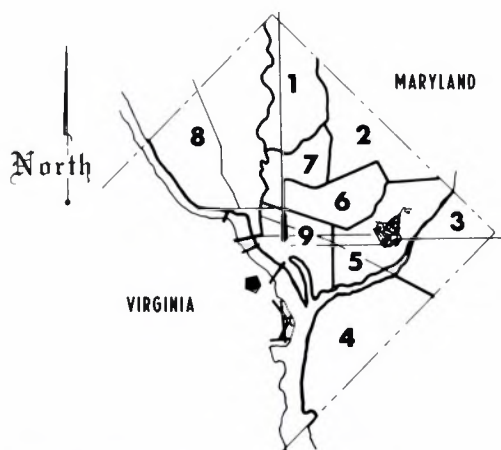


Fig. 2. Map shows how Washington, D. C. is divided into mini areas.

Table 2. Summary Of Basic Two System For WCTS (Cases 2-A and 2-B)

1. Two Parallel Telecasting Cables, Plus Point-to-Point Nets
2. First Telecasting Cable, One-Way; 30 Channels, Fully Operational Throughout D.C.
3. Second Telecasting Cable, Two-Way; 30 Channels Downstream Plus Four Channels Upstream, Fully Operational Throughout D.C. After Third Year of System Operation
4. 100 Subscriber Response Terminals in Service Areas 2 and 7 in First Year, 1100 in Second Year, 6100 in Third Year.* Response Terminals for All Subscribers After Fourth Year.
5. Installation; 5 Phases of One Year Each
6. Total Households Passed; 263,000
7. 1222 Total Street Miles; 1,074 Miles for Telecasting Net, Plus 148 Miles for Point-to-Point Nets
8. Programming Costs: (First Cable) \$9.50/Year/Subscriber; (Second Cable) \$25.25/Year/Subscriber
9. Asymptotic Penetration (Both Cables) 63% to 78%
10. Subscriber Fees First Cable Regular \$3.50 Per Month Per Subscriber Second Set; \$2.00 Per Month Per Subscriber Second Cable Regular; \$3.00 Per Month Per Subscriber Second Set; No Additional Charge
11. Other Revenues; \$12.77 to \$13.40/Year/Subscriber For Advertising Leased Channels and Point-to-Point Channels; Plus \$2.00/Month/Customer for Utility and Maintenance Services
* No equipment or monthly charge for these first experimental terminals

each area could distribute programs that were unique to its area.

Two types of cable nets comprise the system design developed as a result of the study. These consist of 1) a telecasting net providing both broadcasting and cablecasting services for the 263,000 D.C. households, as well as offices, businesses and other potential subscribers distributed over 1100 street miles; and 2) four point-to-point nets of about 1500 cable miles interconnecting several hundred commercial, institutional and governmental locations.

The telecasting net will have dual cables with the capability of 30 forward channels and four reverse channels per cable. The second cable will initially be quiescent allowing for future expansion of both one-way and two-way services except for S/As 2 and 7. These S/As will use the dual cable with four return channels on the second cable for a number of large scale demonstrations with two-way services. Over 6000 special home terminals will be distributed throughout these two S/As at no cost to the subscribers during the first three years of system operation to support these demonstrations. It is planned that, as the demonstrations indicate desirability, the two-way capability will be implemented

throughout the entire system. The telecasting network can be thought of as a tree-like distribution system.

Recognizing the special character of the telecommunications needs of the municipal, federal, academic and commercial institutions, four separate "point-to-point" nets have been designed by Mitre to serve them. The number of users of this network will be relatively small, but the data flow rate will be high in both directions on the cable links. It is also a demand-oriented system, in that services will not always be prescheduled and the users will want to send a large volume of data at particular times, but not necessarily periodically. This generates a requirement that the system should be capable of connecting these users rapidly and in a flexible way. In order to provide the necessary system flexibility, an equal number of forward and reverse channels (14-6 MHz channels each way) for two-way service will be provided on the point-to-point nets. Switching provided at the headend and sub-headends will be used to satisfy the varying demands of these institutional users. Interconnections between this net and the telecasting net will be provided. A summary of the telecasting and point-to-point nets are illustrated in Fig. 1.

Fig. 2 illustrates the implementation plan for the entire system which will take place in five phases of one year each, with a portion of the city being wired in each phase.

In addition to the initial implementation of a number of conventional one-way services, the system is designed for additional one-way and two-way services, over time. A summary of the system is contained in Table 2.

The Mitre report incorporated an engineering report on technical considerations as prepared by Jansky and Bailey. Speculation on subscriber terminal equipment follows closely that of Baer and the Rand report. However, Jansky and Bailey are more explicit in describing equipment under development.

Of promise as a frame grabber is VIDITEM from System Resources Corp., Plainview, New

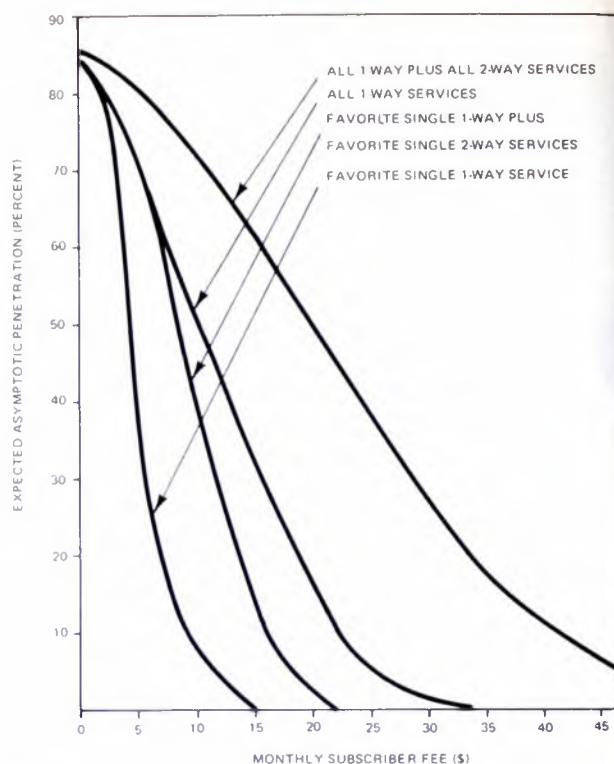


Fig. 3. Expected penetration to monthly subscriber fee for various combinations of service.


York. This device uses a circular Mylar disc to capture up to four frames. Its cost in quantities of 50,000 is estimated to be \$150 (\$180-\$190 with color). A storage tube plus converter from Hughes could also be used. Its cost is estimated at \$100.

The Jansky and Bailey report also cites a 200 KHz facsimile recorder from Toshiba which handles a 12½ in. by 18 in. tabloid newspaper size format. It is said to be able to reproduce both sides of a newspaper in five minutes with a resolution of 200 lines per inch. A single-sided system is expected to cost about \$140. Presumably, Mitre feels some of this equipment should be tested in demonstrations.

As mentioned, Mitre sees a key issue in subscriber fees vs. penetration. The report says profit-making systems' owners press to increase subscriber

Table 3. Point-To-Point Nets

	Type	Number of Subs.	Length (Miles)	Approx. Cost	Notes
Federal	Capitol Building & Major Federal Buildings Four cables.	54	10	\$ 417,000	1) Sixty channel system uses two oppositely directed 30 channel cables and includes a switching facility.
Municipal	Schools, Fire, Police, Hospitals, Sanitation, etc. One cable, fourteen 2-way video channels Police, 2; schools, 6; mayor's office, 2; fire department, 2; hospitals, 1; highways, 1; sanitation, 1.	271	73	\$1,000,000	2) Uses subheadends which are collocated with the telecasting net. 3) Privacy is maintained within each community of interest by virtue of converters that do not permit outsiders to obtain access to channels other than their own.
Institutional	Banks, Savings & Loans, Department Stores Credit Associations, Utility Co., etc. One cable, fourteen 2-way video channels. Transit co., 1; metro, 1; utility, 2; banks, 7; store nets, 3.	300	50	\$1,000,000	4) Same as Municipal 2) and 3).
Higher Education	American U., Catholic U., Federal City College, Georgetown Univ., George Washington U., Howard U., and the 17 other colleges of Washington, D.C.	23	15	\$ 183,000	5) Thirty channels, fourteen one-way, sixteen the other way in a two-way system.

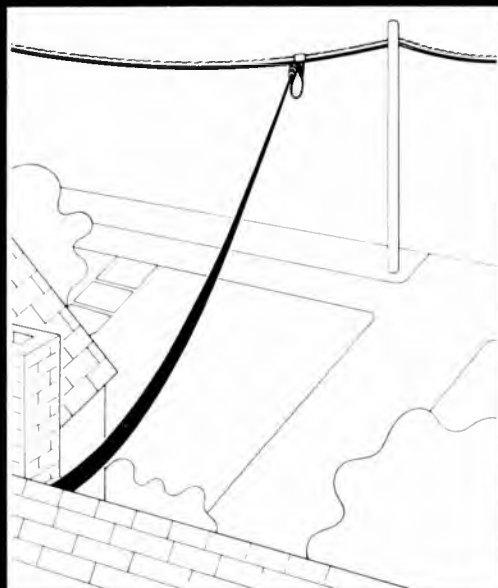

Which drop cable do you prefer?



New Polyshield

Exclusive Cerro Polyshield is aluminum foil bonded to both sides of tough polypropylene. It provides 100% shielding, yet flex life is several times better than conventional aluminum/polyester shields. A 50% aluminum braid eliminates slot antenna affect and lowers DC resistance. Available in RG-59, RG-6 and RG-11 sizes, solid or foam dielectric, vinyl or polyethylene jacket.

97% Shield Coverage

Dense, tightly woven 97% coverage copper clad aluminum braid. Center conductor is copper clad steel, combining strength with conductivity. Available in RG-59, RG-6 and RG-11 sizes, solid or foam dielectric, vinyl or poly jacket.

We carry a full line of other popular drop cables (including dual drops) with or without messenger, plus a complete spectrum of trunk and distribution cables.

You can't buy better CATV cable, yet the price is right. Before you place your next cable order, check with:

CERRO WIRE & CABLE CO.

DIVISION OF CERRO CORPORATION

Halls Mill Road, Freehold, N.J. 07728, (201) 462-8700

Circle 153 on Reader Service Card

fees and reduce penetration to optimize early profitability rather than to sacrifice profit for larger market penetration that will eventually be the key to greater benefits to the entire urban community. The relationship of penetration to fees for various combinations of service are shown in Fig. 3.

Table 4. Possible Channel Allocations For WCTS Telecasting System

CABLE 1 (Downstream)		
1. D.C. TV Channels	7	A ¹
2. Baltimore TV Channels	6	A
3. Distant TV and Cable Signals	5	A
4. Weather/Time/Stock Market	1	D
5. News/Radio	1	D
6. Service Area Channels		
a. Public Access	1	B
b. Local Origination	1	C
7. TV Channels Guide/Current Events	1	D
8. Dedicated Channels for Lease (1-way)	2	B
9. Public Information Channel	1	C
10. Instructional Channels (1-way): for D. C. Schools and Universities	2	B
TOTAL⁴	28⁴	
CABLE 2 (Downstream)		
1. Distant Cable Signal	1	A
2. Municipal Government Access Channel	1	B
3. Federal Government Access Channel	1	B
4. Channel for Professionals	1	B
5. Innovative Channel (1-way)	1	C
6. Public Interest Channels ²	4	B
7. Interactive Educational Channel (2-way)	1	C
8. Interactive Entertainment Channel (2-way)	1	C
9. Dedicated Channels for Lease (2-way) ³	2	1-B, 1-C
10. Video Library	1	B
11. Facsimile Channel	1	B
12. CAI Channels (2-way)	12	B
13. CCTV Channels	1	B
TOTAL⁴	28⁴	
CABLE 2 (Upstream)		
1. Data entry/request channels from terminals to headend or subheadends and video return channels	4	D
TOTAL⁴	4	
¹ Legend for Programming Categories		
A—Off-the-air local or imported TV signals with no programming required by WCTS.		
B—Leased channels with programming supplied by lessee.		
C—Channels requiring programming origination by WCTS.		
D—Channels requiring minor programming origination by WCTS.		
² These channels would be reserved for health, employment, legal, job training and welfare service.		
³ Including return channels.		
⁴ The two channels of each cable in the aircraft navigation band would be held in reserve until field measurements to check radiation could be made.		

The thirty channel system, with converters, was chosen over the 24 dual cable system, with no converters, primarily because of Washington's four strong VHF television signals. It is estimated that these four signals would reduce the capacity of the dual cable system even further, i.e., to 16 channels, because of direct pickup problems. The discrete switched cable systems, i.e., Rediffusion and Cascade, were ruled out because of their generally acknowledged higher cost per subscriber, their lack of flexibility with respect to future expansion, and space requirements for their switching gear.

A converter (the Gamut 26 or equivalent) could be used if modified to include an A/B switch. The subscriber terminal selected is currently in use by Mitre at Reston, Virginia. It will permit the viewer to select private or public information channels—it does not provide for voice or data generation. Additional subscriber response terminals will be introduced for experimental use.

The point-to-point network planned is summarized in Table 3. An example of a possible channel allocation is given in Table 4.

Among the other demonstrations planned for the system is a traffic control plan. Washington currently has a traffic control system which uses telephone wires. A cost-saving of 50 percent per month is envisioned if the cable is used instead. Similarly, the costs of police communications could be cut if its system were integrated with the broadband cable.

An overall picture of revenues and expenditures for all services after ten years is given in Table 5. Mitre also compared total services systems with a one-way system.

By the tenth year, total operating expenses for the two-way systems are almost twice as large as for the one-way systems, and programming costs are about three times as large. By the tenth year, total gross revenues for the two-way systems are about 2.5 times as large as those for the one-way systems. The total equity capital required for the two-way system cases is about two times greater than that required for the one-way systems.

Detailed cash flow projections are contained in the report. CM/E

Table 5. Projected 10th Year WCTS Revenues And Expenditures For All One-Way Plus Two-Way Services

	Penetration					
	.30	.40	.50	.60	.70	.80
Annual Subscriber Cost (First Outlet)	\$342.00	\$282.00	\$228.00	\$180.00	\$126.00	\$72.00
Revenue per Household						
a) Subscribers	104.77	115.70	117.60	112.30	93.24	63.36
b) Advertising and Leased Channels	3.27	3.76	4.22	4.53	4.95	5.37
c) Utility Services	24.00	24.00	24.00	24.00	24.00	24.00
TOTAL	\$132.04	\$143.46	\$145.82	\$140.83	\$122.19	\$92.73
Expenditures per Household						
a) Operations, Interest and Depreciation	\$ 34.86	\$ 39.19	\$ 43.76	\$ 47.87	\$ 51.71	\$56.51
b) Taxes	46.50	49.92	48.86	44.52	33.71	18.61
c) Debt Retirement	0	.08	4.72	5.25	4.15	10.27
d) Capital Equipment	.65	.72	.80	.80	.80	.80
TOTAL	\$ 82.01	\$ 89.91	\$ 98.14	\$ 98.44	\$ 90.37	\$86.19
Surplus per Household (Total Revenue Less Total Expenditures)	\$ 50.03	\$ 53.55	\$ 47.68	\$ 42.39	\$ 31.72	\$ 6.54

GTE Sylvania, the oldest new company in CATV.



The Sylvania name has been around for a long time.

You'll find it on everything from the earliest receiving tubes to complex aerospace equipment.

But, up till now you haven't found it in CATV equipment. We've changed that.

You'll be seeing the GTE Sylvania name in a lot of places. On trunk amplifiers, line extenders, and other types of CATV equipment. Even on complete systems.

And we're not just offering "another" line of equipment. We'll give you something as advanced as a trunk amplifier that has features you just couldn't get till now. Or we'll give you something as simple as a key.

The key to a "turnkey" installation.

We'll even program our computers to give you the most efficient system layout, project your break-even point and do signal surveys.

We may be new to CATV, but with a name like GTE Sylvania you can hardly call us beginners.

Sylvania Electronic Components, Seneca Falls, N.Y. 13148

GTE SYLVANIA

SCALA ANTENNAS: THE PROBLEM SOLVERS

Scala antennas have been problem solvers for over 25 years. Scala VHF antennas installed in the world's first CATV systems are still going strong today. The problems of antenna performance under all kinds of conditions are solved by Scala construction that is designed to handle all conditions—for continuous service with minimal maintenance.

For example, the Scala VHF Color Log Antenna is a solution to the problems of metal fatigue and stress. Heavy gauge aluminum is laminated to resist resonances, mounted at the balance point for extra stability, with non-ferrous hardware.

At the same time Scala increased electronic efficiency through use of larger active regions, thus providing coverage of 3 channels through 13 with only two Color Log antennas, solving the replacement of other manufacturers for three or more antennas.

Color Log VHF Antennas:

CL-26 and CL 713 (channels 2-6 and 7-13):

Front-to-back ratio 25 db minimum.

VSWR maximum 1.4, average 1.2

Gain over isotropic source: Dipole:

CL-26 10 + db 8 + db

CL-713 11 + db 9 + db

Gain throughout any channel is within 1/2 db, and throughout the spectrum within 1 db.

FM Log Periodic Antenna

Model CLFM (88-108 MHz)

Front-to-back ratio 25 db minimum.

Frequency range: 88-108 MHz.

VSWR: Maximum 1.4:1

Gain over isotropic source: 9.14 db. Dipole 7.0 db.

Gain throughout FM band (88-108 MHz) is within 1/2 db.

Color Log UHF Antennas:

CL-1483 (channels 14-83)

Front-to-back ratio: 35 db minimum

VSWR: Maximum 1.3, average 1.2

Gain over isotropic source 10 + db. Dipole 8 + db.

Gain throughout any channel is within 1/2 db, and throughout the spectrum within 1 db.

All CL-1483 antenna elements are fused with a fiber glass cover, thereby permitting the design of an antenna of maximum electrical efficiency, without concern for mechanical problems.

TWO OR MORE COLOR LOG ANTENNAS MAY BE STACKED TO ACHIEVE MAXIMUM GAIN OR PHASED TO PROVIDE OPTIMUM SOLUTIONS TO CO-CHANNEL MULTIPATH AND OTHER RECEIVING PROBLEMS.

Color Log VHF Antennas



Color Log UHF Antennas




THE COMBINATION OF SCALA RESEARCH AND CONSTRUCTION
CAN SOLVE YOUR PROBLEMS WHEN YOU HAVE ANY COMMUNICATIONS
PROBLEM THAT NEEDS SOLVING. WRITE OR CALL.

Scala Radio Corporation

THE WORLD'S MOST EXPERIENCED CATV ANTENNA MANUFACTURER
1970 REPUBLIC AVENUE, SAN LEANDRO, CA 94577 (415) 351-3792

BROADCAST EQUIPMENT

Information dissemination/retrieval equipment provides remote control of audio and video recorders in scattered locations. Telecyclopedia is a system with encoding and decoding units that give schools or individual students fast access to a central library of material. Operators of radio

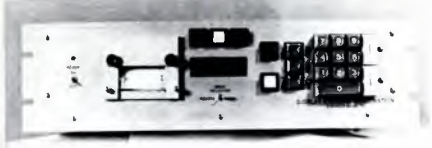

and TV stations, as well as ITFS, CATV, and CCTV systems, can activate remotely-located recorders, audio or video, to store audio or video material at the subscriber's location, for replay at any subsequent time. DISPLAY SYSTEMS CORP. 275

Integrated headend equipment consists of modular units holding modulators, demodulators, and heterodyne processors on a universal main frame. System/7 provides all units for up to seven channels on one frame 19 in. wide, 7 in. high, and 24 in. deep. With optional plug-in combiner all outputs can be combined right on the frame. Power supply and cooling blower are also integral. Modules are unitized on the system level but also internally—plug-in circuit boards carry each major functional section. PHASECOM CORP. 276

Two-way cable system allows subscriber to request material through a pushbutton subscriber's console. Subscriber Response System (SRS) puts upstream digital signals on 4 MHz band between 21 and 25 MHz. Lo-



cal processing center interrogates each subscriber terminal in sequence at a periodic rate. Action on requests and recording of billing information, (if there is a charge), are automatic. Interrogation cycle is so rapid that

subscriber has sense that he initiates request. THETA-COM. 277

Chrominance/luminance gain normalizer simplifies measurement of chrominance to luminance gain differences and delay calculation in sine-squared pulse testing. Models 137 and 138 allow insertion of calibrated attenuation to achieve deviation symmetry, with the luminance or chrominance gain distortion then read directly from attenuator controls. Model 137 is for systems with 3.58 MHz subcarrier, model 138 for those with 4.43 MHz subcarrier. TEKTRONIX. 278

All-purpose TV microwave radio operates in band from 2 GHz to 13 GHz, is intended for reliable transmission of NTSC color television signals. TCM-6 Series has plug-in conversion to any frequency band, built-in test and automatic fault isolation, RF units that can be rack, tripod, tabletop, or mast mounted. Tuning



through each band can be fixed or front-panel continuous dial, with crystal reference. TERRACOM 279


Directional high-power RF wattmeter covers 25 to 500 MHz and 1 watt to 500 watts full scale. Model 4370 ThruLine uses precision-machined 50-ohm reference line section inserted between the signal source and the antenna, load, or other component under test. Sensors in this section produce dc voltages proportional to incident and reflected RF power. Insertion VSWR is less than 1.1, accuracy is $\pm 5\%$ on all ranges. \$475. BIRD ELECTRONIC CORP. 280

One-kilowatt AM transmitter uses new Eimac tetrode tube, 4-500A. Model 701 has large blower, the same as on the 5 kw transmitter, and a solid-state dual oscillator. It comes with any two power levels, the most

popular being 1000/500 and 1000/250. Nuisance outages are eliminated by automatic resetting of relays on single, short overloads. SPARTA ELECTRONIC CORP. 281

Trunk amplifier provides either 22 or 25 dB gain at 265 MHz. T-424 has guaranteed bandpass of 50 to 270 MHz, ± 0.25 dB over band. Noise figure is 8.5 dB at 265 MHz, cross modulation -93 dB, normal trunk input $+10$ dBmV at 265 MHz. C-COR ELECTRONICS. 305

Phaselock modulator for CATV eliminates co-channel interference, makes additional channels usable, by locking output carrier frequency to a

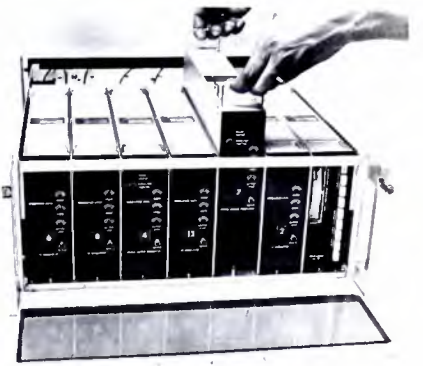

sampled off-the-air signal from a local TV station. Model 7120 can also eliminate co-channel beats in dual cable systems, and can be used to produce a coherent headend, with all channels phaselocked to a common 6 MHz comb generator, eliminating triple beats. PHASECOM CORPORATION. 306

Noise reduction unit provides Dolby "B" processing for tape recording and playback on tape machine connected to unit. Model 100A also allows decoding and simultaneous recording of Dolby-processed FM broadcasts; decoding of Dolby-processed tapes; and copying of Dolby-processed tapes. \$275. ADVENT. 282

Ultra-high-resolution TV camera can produce up to 1100-line horizontal resolution for CCTV applications. Model CTC-8000 is aimed for use where photographic reproduction of small detail is desired. It is available with any of eight scanning rates from 525 to 1023 lines. Video bandwidth is 30 MHz. Supplied are a camera
continued on page 38

Spotmaster

**Economical
Tape Cartridge
Equipment from ...**

**Pushbutton Broadcasting
At Budget-Pleasing Prices**


\$440



Model 500 C



Model 400 A

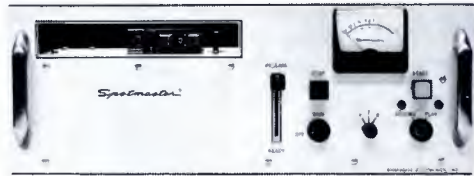

Model 500 CR

COMPACT 500 C SERIES—Completely solid state, handsome 500 C equipment features functional styling and ease of operation, modular design, choice of 1, 2, or 3 automatic electronic cueing tones, automatic record pre-set, separate record and play heads, A-B monitoring, biased cue recording, triple zener controlled power supply, transformer output . . . adding up to pushbutton broadcasting at its finest. Specs and performance equal or exceed NAB standards. Record-play and playback-only models are available.

RACK-MOUNTED 500 C MODELS—The 500 CR rack models offer the same Model C design and performance features and are equipped with chassis slides ready to mount in your rack. Each unit slides out for easy head and capstan cleaning and other routine maintenance.

All 500 C models carry iron-clad full-year guarantees.
ECONOMICAL 400 A SERIES—Now even the smallest stations can enjoy Spotmaster dependability with the low-cost, all solid state 400 A series, available in compact record-play and playback-only models. Performance and specifications are second only to the 500 C series.

For complete details about these and other Spotmaster cartridge units (stereo, delayed-programming and multiple-cartridge models, too), write, wire or call today. *Remember, Broadcast Electronics is the No. 1 designer/producer of broadcast quality cartridge tape equipment . . . worldwide!*



BROADCAST ELECTRONICS, INC.

A Filmways Company

8810 Brookville Road, Silver Spring, Maryland 20910 • (301) 588-4983

PRODUCTS

and a control unit, connected with a 33 ft cable; latter provides the standard control functions. High sensitivity allows production of a usable picture with 1/10 foot-candle, full resolution at 1 foot-candle. \$2495.00. GBC CLOSED CIRCUIT TV CORP. **284**

Electronic chronometer is accurate to better than 0.1 second per day, has a sweep second hand and 4 in. dial that make it easily readable across an average radio or TV control room or small studio. Quartz Crystal Chronometer is driven by a crystal-controlled oscillator and synchronous motor, runs on standard D-cells with battery life of about one year. \$575. WEEMS & PLATH. **285**

Line of VTR equipment includes both cassette and reel-to-reel systems. Model 1100SH reel-to-reel, aimed for sports, education, industry and science, has slow-motion capability, seven-hour time-lapse mode, stable still-frame pictures useful in surveillance work, accelerated motion, with playback at one-seventh recording speed, stop motion and frame-by-frame advance. Approximately \$2500 (including camera, electronic viewfinder, monitor). SANYO. **286**

Microwave radio system for 12.2 to 13.25 GHz band has maximum capacity of 1200 message channels or a video signal. Model 78E2 power output is 25 dB, receiver noise figure is 11 dB, and the available arrangements include single channel, frequency diversity, crossband diversity, hot standby, space diversity, and two-for-six protective switching. GTE LENKURT. **287**

8mm movie projector with cassette loading works with sound-synchronized system that uses portable cassette tape machine for sound synchronized with separate camera. Model 478Z projector automatically threads, shows, and rewinds film; user simply puts film cassette onto machine. Sound is added by cassette tape recorder connected to projector by a single cord. \$249.95. BELL AND HOWELL. **288**

High-speed picture digitizers convert into digital signals any continuous-tone grey scale pictures or objects. Model 108-1 feeds a computer directly. Model 108-2 records onto IBM-compatible tape, Model 108-3 is interface and control for PDP 11/20 Digital Processor. Units are continued on page 40

\$50⁰⁰

**SPOTMASTER
DISCOUNT
CERTIFICATE**

\$50⁰⁰

Limited time offer—Get any Spotmaster tape cartridge machine or system for \$50.00 off the regular price!

**SAVE THIS VALUABLE CERTIFICATE
AND SEND WITH ORDER**

Offer applies to Spotmaster Ten/70, 500 and 400 series and all multi-cart players including new 300 and 600 Mini-Series, Five-Spot and Ten-Spot. Limit: One Discount Certificate per order.

Can be redeemed through local authorized distributor; or call or write for catalog and price list: BROADCAST ELECTRONICS, INC., 8810 Brookville Road, Silver Spring, Maryland 20910 • (301) 588-4983

Offer expires April 30, 1972

BF-3-15



it 's on record...

Now it's official! An association survey quoted in BM/E magazine produced some very revealing information on FM broadcast equipment preferences — particularly in the category of phono cartridge usage, where a whopping 57% of the respondents expressed their preference for Shure cartridges . . . *more than all other brands combined*. It didn't particularly surprise us because we know our M44 series with its uncommon combination of clear sound, low cost, exceptional ruggedness and excellent back-cuing characteristics, has been the broadcast standard for years. And our peerless V-15 Type II Improved? There simply isn't a better cartridge for "high fidelity" FM operations. Write for the free Shure "Guide to the Conversion of Monophonic Broadcast Facilities for Stereo Records," as well as the complete Shure Phono Cartridge Catalog.

Shure Brothers Inc.
222 Hartrey Ave., Evanston, Ill. 60204

Circle 129 on Reader Service Card



QUALITY



AM BROADCAST MONITORS

ALL SOLID STATE DESIGN

- All models FCC type approved
- Compact — 5¼" high on a standard 19" rack
- Excellent stability
- Highest quality workmanship and components used throughout
- Designed and manufactured for years of reliable dependable service
- Remote metering available — models 506 B-1 and 510
- Low cost — Fast delivery



506 B-1 Modulation Monitor \$550



510 Frequency Monitor \$795



520 Frequency Monitor \$995




METRON INSTRUMENTS, INC.

1051 South Platte River Drive Denver, Colo. 80223
(303) 744-1791 • TELEX 04-5729

Circle 115 on Reader Service Card

remote VHF-TV aural modulation monitoring

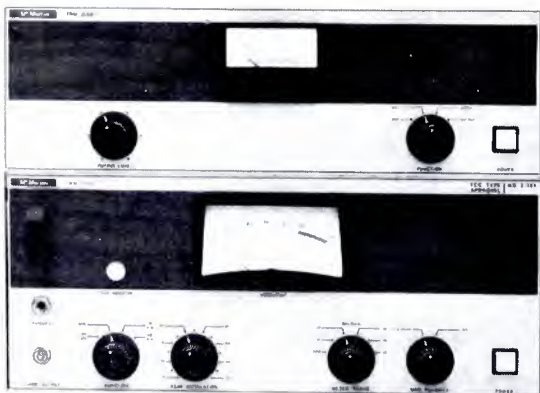

TBM-2500-CL \$510.00 | TBM-5500 \$1,300.00
TBM-2500-CH \$535.00

At a very practical price, McMartin's TBM-5500 satisfies new FCC rules for "a type approved aural modulation monitor, equipped where necessary, with a properly designed signal frequency amplifier..." Sec. 73.676(a)(5). ■ Driven by the TBM-2500-CL (Channels 2-6) or TBM-2500-CH (Channels 7-13) RF Amplifier, the TBM-5500 has a composite output signal termination to permit measurement of 39 kHz subcarrier injection level. Equipped with the TBM-2100 SCA Demodulator (optional at \$125.00), it also provides recovery of subcarrier telemetry tone information. ■ Long the leader in FM monitoring and professional receiving equipment, McMartin now provides the realistic answer to remote control VHF-TV aural monitoring. Coming soon — the TBM-5000 VHF-TV Digital Frequency Monitor — for visual, aural and intercarrier deviations.

For details, contact: Broadcast Product Manager (402) 342-2753

McMartin

mcmartin industries, inc. • 605 no. 13th st. • omaha, neb. 68102

Circle 116 on Reader Service Card

PRODUCTS

intended primarily for photometry, micrography, spectrography, digital TV, pattern recognition. \$10,000-\$17,000. SPATIAL DATA SYSTEMS. 289

Control unit for use with microphone mixers adds cueing and monitoring facilities; combination is a complete, small-sized broadcast or recording console. Model M675 Broadcast Production Master is designed to go with the M67 series of microphone mixers. M675 also adds four line inputs and built-in battery supply. \$250. SHURE. 290

FM frequency/modulation monitor combines measurement of frequency deviation and modulation percentage in a single unit. Model TBM-3700 has a meter for each function and the two are simultaneously shown without measurement interaction. Internal reference permits calibration of 100% modulation point at any time. \$1300. McMARTIN. 291

All-channel demodulator is meant primarily for recording off-the-air TV programs, distributing audio and video from TV through educational TV systems, feeding program origination consoles, and for headends in ETV systems. Model UD-283 has fine tuning on all 82 channels, front-panel tuning meter, separate VHF and UHF 75-ohm coaxial inputs, 75-ohm video output and 600-ohm audio output. JERROLD. 292

Multi-track mastering tape deck has four-channel record and playback, and overdub facilities. Model TCA-43 allows independent recording on each of the four tracks, with exact



synchronization of new to old by using record head on recorded track as a playback head. Optional AX-20 mix-down panel can provide left, center or right distribution of each track, as well as mix-down to two-channels or to mono. \$729. TEAC. 293



INTRODUCING...

Century Series

by SPARTA...

...which makes other tape cartridge equipment obsolete.

A decade ago the industry enjoyed a new SPARTA idea in tape cartridge handling, not matched in newness until today's *Century Series*.^{*} Its original and exclusive features maintain SPARTA leadership in everything for your every broadcast need. *Century Series* is for you now! Make sure your station isn't left behind;

send for details today.

^{*}Playback module only \$425



SPARTA

ELECTRONIC CORPORATION 5851 FLORIN-PERKINS ROAD SACRAMENTO, CA 95826

A DIVISION OF COMPUTER EQUIPMENT CORPORATION

Circle 117 on Reader Service Card

BROADCASTING REQUIREMENTS HAVE CHANGED IN 20 YEARS


... SO HAS THE EQUIPMENT

1952

1972



AM-19D DIGITAL ANTENNA MONITOR

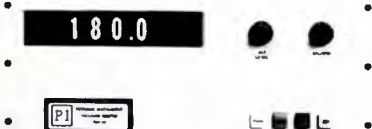

PMA-19 PRECISION MONITOR ADAPTER



AM-19 ANTENNA MONITOR



PM-112 PHASE MONITOR



DDA-19 DIGITAL DISPLAY ADAPTER

- No modulation effects
- Simplified operation—no operator adjustments
- Resolution to 0.1% current ratio and 0.1° phase angle
- Up to 12 towers
- Remote readouts easily added



Producers of
NEMO CLARKE
Broadcast Equipment

POTOMAC INSTRUMENTS, inc.

932 Philadelphia Ave.
Silver Spring, Md. 20910
Phone: (301) 589-3125

Circle 118 on Reader Service Card

NEW LIT

For copies of these literature offerings, circle numbers for appropriate items on Reader Service Card.

Community Video Center has issued catalog of videotapes, most dealing with social problems of poor from point of view of radical groups. Write Community Video Center, 1411 K St., N.W., Washington, D.C. 20005.

35-KW Diesel-Electric System is described in six-page brochure, with graphs illustrating voltage and frequency characteristics, power ratings, fuel consumption, and other precision performance specifications. Allis-Chalmers. **200**

"News 49," among a number of other articles on general technical topics and on new equipment, carries complete description of sideband adapter for Videoskop III SWOF; the two together permit rapid measurement of frequency response of AM picture transmitters. Rohde and Schwarz. **201**

Instrument control knobs are subject of full-color bulletin; included are illustrations, schematics and specs of round, round-dial, one-bar, two-bar and numerous other knob forms. Nobex Division, Griffith Plastics. **202**

Linear and rotary audio attenuators are shown with specifications, outline drawings, operating curves. Waters Manufacturing. **203**

Catalog of professional audio products covers microphones, mixers, control units, mike accessories, preamplifiers, line transformers, stereo pickups. Shure Brothers. **204**

Guide to coaxial instrumentation gives operating notes and complete specs on reflectometers and admittance meters, UHF bridges, slotted lines, standing-wave meters, amplifiers and detectors, programmable attenuators, all for microwave applications. General Radio. **205**

Professional motion picture equipment is covered in 112-page catalog that lists more than 3000 items, under such headings as 35mm cameras, 16mm cameras, lenses, filters, viewfinders, lighting, film processing equipment, sound, projectors, etc. Alan Gordon Enterprises. **206**

"RAPID-Q"



Record-Playback-RQ-71-RP



Stereo Record-Playback-RQ-71-SRP



Single Playback in dual cabinet-RQ-71-P1



Dual Playback-RQ-71-P2



Triple Playback-RQ-71-P3

Available at these
Representatives:

VISUAL ELECTRONICS CORP.
New York, NY 10018 (202) 736-5840

McMARTIN INDUSTRIES, INC.
Omaha, NB 68102 (402) 342-2753

TOM AYE & ASSOCIATES
Sunnyvale, CA 94087 (408) 738-1406

WENDEL L. MARTIN
Camillus, NY 13031 (315) 673-2943

VIC BLACKETER
Des Moines, IA 50316 (315) 274-2551

RICHARD W. BURDEN
Mt. Kisco, NY 10549 (914) 666-3730

MANUEL FLORES
Laredo, TX 78040 (512) 723-6913

RADFORD ASSOCIATES
Atlanta, GA 30319 (404) 237-6097

DELBEE ASSOCIATES, LTD.
Montreal 384, Que (514) 334-5763

See them at NAB
Booth #301
in the Continental Room

"RAPID-Q"

GARRON ELECTRONICS, INC.
1208 Kifer Road Sunnyvale, Calif. 94086
(408) 736-8737

Circle 119 on Reader Service Card




By David Dary. A non-profit guide to TV News department operation including how to gather, write, produce and present TV news. Regardless of your status, working or would be newsman, station manager, or student, you will benefit from the behind the scenes insight incorporated into this work, an amalgamation of practical knowledge and experience brought right up to date. For anyone now in radio news, aspiring to step up into the higher paying and more exciting world of TV, this new book will provide a head start up the ladder. Anyone associated with the growing number of CATV operations becoming involved in program origination will find a wealth of information & help in planning and improving the format and quality of local programming. 256 pps. Hardbound.

Order No 567

\$9 95

PROMOTIONAL & ADVERTISING COPYWRITER'S HANDBOOK



This brand new work emphasizes the important aspects of preparing advertising or promotional copy for various media (newspapers, magazines, billboards, direct mail, radio, and television). It is essentially a copywriting course workbook which requires the student to complete some 18 different assignments. In so doing, the importance of copy style and format are related directly to the job of creating and presenting the proper message. Also considered are such requirements as layout and copyfitting, typography and visual graphics, and how these relate to the specific target audience. Included are numerous worksheets, specifically planned for the student's use in completing copywriting assignments for various media. 128 pps., 8 1/2 x 11"

Order No 579

Vinyl Cover \$7 95

THE POWER TECHNIQUE OF RADIO-TV COPYWRITING



By Neil Terrell. Based on a series of workshop seminars developed and conducted by the author for professional broadcasters. Teaches beginners, salesmen, and managers how to write broadcast copy that gets results, copy that will sell products and services. The author has drawn on his own skills as well as those of many other pros in presenting not only the how to information but actual samples from the files of leading professionals. Tells how to use the proven Power Technique formula: analyzing each account, determining the correct appeal and writing ad copy that will motivate people to buy. 224 pps.

Order No 518

Hardbound \$9 95

Helpful Books that Belong in Every Station—Now on 10-Day FREE Trial!

The Business of Radio Broadcasting

By Edd Rouff, Assistant to the president, McLendon Stations; Instructor in Station Management, Southern Methodist University.

Without Exaggeration—The Most Authoritative & Useful Station Operating Handbook Ever Published!



Known throughout the industry as "The Old Scotchman," and recognized as an outstanding innovator in radio broadcasting, Gordon McLendon says, "I believe we should deal with this book as the best living instrument on radio broadcasting. I wish I had written it!" The truth is, in a way, he did write the book through his leadership and his accomplishments. Edd Rouff's magnificent contribution was to put together—in this one easy-to-understand handbook—all the magic all the knowledge gained in 20 years of broadcasting, the complete details which lead to successful station operation based on the proven philosophies of the McLendon organization. It's destined perhaps to become the classic of the industry.

The Business of Radio Broadcasting is the first book which truly deals with broadcast station operation from beginning to end. Such problems as keeping up with and adhering to FCC regulations, dealing with labor unions, and handling personnel are discussed frankly and openly. Specific policies for stations in both major and minor markets are


thoroughly explored. Job requirements at all levels are covered in great detail! The problems, hazards, accomplishments, and rewards of the business are candidly explained.

The style of this long-awaited publication, although conversational and informal, teaches the terminology peculiar to the broadcasting industry. Actual case studies, taken from the author's own experience, add realism and practical guidance. 400 pages deal with hundreds of topics including: The FCC Guidelines, Philosophies, and Rules; The Station and the Federal Government; Relationship With Other Mass Media; Public Ownership of the Airwaves; Selling the Station to Advertisers; Administrative Responsibilities; The Station in the Community; Departmental Organization; Program Format Selection; Equipment & Engineering; Financial Considerations; Conduct Requirements; Technical Operations; Living With Unions; Sales Management; Sales Philosophies; Record Keeping; Rate Structures and Accounting.

Order No 587

Hardbound \$12 95

HOW TO BECOME A RADIO DISC JOCKEY

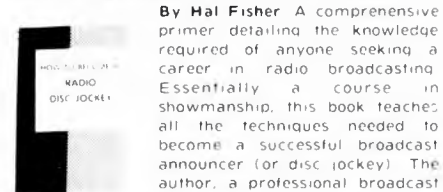

By Hal Fisher. A comprehensive primer detailing the knowledge required of anyone seeking a career in radio broadcasting. Essentially a course in showmanship, this book teaches all the techniques needed to become a successful broadcast announcer (or disc jockey). The author, a professional broadcast consultant and instructor, herein

provides a virtual, step by step guide to help the reader obtain his or her first job in a commercial radio station. Also ideal as a classroom text! 256 pps.

Order No 557

Hardbound \$9 95

COMMERCIAL FCC LICENSE STUDY GUIDE


Swearer. A new and unique study guide and reference manual, combining theory and applications with up to date questions and answers for 1st, 2nd, and 3rd Class Radiotelephone license exams plus broadcast and radar endorsements. Everything you need to know is included—complete detailed answers to questions on any subject you may be asked when you take your exam, plus sample questions on each element (with answers in the back of the book) so you can check yourself whenever you think you're ready. Numerous practical examples

are used to describe the various principles you need to understand the exam questions. All commercial radiotelephone operator classes are covered—third, second, and first—plus the elements required for broadcast and radar endorsements. 437 pps., 150 illus.

Order No 582

Hardbound \$8 95

BROADCAST ANTENNA SYSTEMS HANDBOOK



Brand new, practical guide to all types and styles of broadcast antenna systems. Covers preparing engineering data for the FCC, designing, engineering and operating systems; selecting antennas, measuring performance, improving coverage, etc. Includes AM-FM-TV UHF, FM-DA antenna systems, FM dual polarization, microwave directional AM, etc. 18 BIG Chapters—160 pps.—over 100 illustrations.

Order T-44

only \$7.95

THE RADIO PROGRAM IDEABOOK



by Hal Fisher. All the program making ideas you need to build and hold an audience. For the program director looking for a fresh source of ideas, this volume is loaded with suggestions to help him push his station's ratings to the top. For the ambitious announcer or deejay, this publication will help accelerate his progress. 10 BIG Chapters contain sources of unique ways to give your audience

a reason to listen—the do's and don'ts of good programming and commercial success. You'll learn how to spot audience losers, conduct a newspaper column, publish a newsletter, start fan clubs, revitalize programming and pump new life into your station's sound and bank account. Contains tested and proven methods of systemizing the program department, of handling traffic and scheduling. 256 pages, over 50 illustrations. Hardbound.

Order No 268

only \$12 95

HOW TO SELL RADIO ADVERTISING



By Si Willing. Millions of words have been written about salesmanship, yet thousands of salesmen are still groping for the right formula. And therein lies the secret as Si Willing illustrates it by theory and, even more important, by practice. You'll hear all sorts of objections and how they've been successfully countered.

You'll learn the approaches and the clinchers, how to use available sales tools to the best advantage, how to overcome fear and timidity, and how to deal with the competition. You'll learn ways to sidestep objections, how to recognize the "opportune moment," how to convert a "No" to a "Yes," and how to satisfy the prospective sponsor who has everything. If you want to improve your selling techniques and increase your sales, this book has what you need. 320 pps.

Order No. 511

Hardbound \$12 95

A GUIDE TO RADIO & TV BROADCAST

ENGINEERING PRACTICE By E. L. Safford, Jr.

THE FIRST NEW BROADCAST ENGINEERING BOOK IN YEARS! A modern, up-to-date, handbook on all phases of broadcast operation, maintenance and troubleshooting.



Here's a book long needed by the radio and TV engineering profession—in fact by anyone with an interest in radio and TV broadcasting, since it covers all aspects of the subject from personnel qualifications to proof-of-performance measurements. This invaluable volume is divided into two parts—Radio and Television—and begins with a discussion of personnel qualifications. Here you'll find useful suggestions on how to classify various levels of technical competence and how to encourage improvement at each level. Preventive maintenance is given thorough treatment, including how to set up a schedule based on analysis of failure rate and probability, and how to determine tube replacement and spare parts requirements. Also, a number of actual case histories provide answers to tough or unusual problems. Extensive attention is given to AM antenna systems; how to measure antenna reactance, impedance, and resistance; the use of shunt-fed towers; the design and operation of directional phasing and matching networks; and multi-station towers. The television section also includes a complete description of a

model station, plus practical engineering suggestions supplied by stations all over the country. You'll be fascinated by a "tour" of what is considered to be one of the finest TV operations anywhere.

And, this engineering manual is as valuable to management as it is to technical personnel. It not only involves the daily nuts-and-bolts aspects, but also covers those phases of vital interest to administrative personnel (including those who hope to move into administrative positions).

While an in-depth consideration of equipment was not intended to be a part of this work, there is enough information, both descriptive and pictorial, to acquaint any uninitiated reader with typical equipment used in radio and TV stations. Also suggested is a maintenance philosophy based on proven calculated probabilities of failure. You'll find this one of the most interesting and informative books ever printed. 288 pages, over 140 illus.

Order No. 523

only \$12.95

PLEASE TURN OVER FOR MORE GREAT BROADCAST BOOKS AND 10-DAY TRIAL COUPON

VIDEO TAPE PRODUCTION & COMMUNICATION TECHNIQUES

VIDEO TAPE PRODUCTION & COMMUNICATION TECHNIQUES
By Joel Efrein. A complete how-to-do-it handbook on video production, direction, and program creation for broadcast, CATV, educational, and industrial applications. Finally, here is a handbook that covers video tape production techniques for those who want to learn the art from scratch. The author has taken a down-to-earth, how-to-do-it approach to clearly explain every aspect of the subject. It is a practical text on techniques, with emphasis on production, beginning with the basics, the rudiments of putting a program together, and finally the direction of the complete undertaking. 256 pps., 125 illus. **Hardbound, only \$12.95**
Order No. 541

GUIDELINES FOR NEWS REPORTERS

GUIDELINES FOR NEWS REPORTERS
By Sol Robinson

By Sol Robinson. In this invaluable new handbook, author Sol Robinson, a thoroughly experienced and dedicated broadcast journalist, relates quite specifically, and in great detail, the scores of practical techniques he has found to be successful. To begin with, he delves into the most pertinent question—just exactly what is expected of and required of a broadcast journalist. To be successful, the practicing newsmen must have the right answers—and he'll find them in this vital new work written by a thoroughly seasoned newsmen. Yes, here is a ready-to-use guidebook, chock-full of practical help for both newsmen and announcers, and for salesmen and managers who should have a full working knowledge of their news department. The art of being absolutely accurate, fair and objective in reporting what actually happened is the job of a journalist, and the author tells how to maintain the necessary objectivity vital to the continuation of free news media. Illustrations include many photos, charts and graphs, plus an Appendix of synonyms for over 2700 modern everyday words.
Order No. 516 only \$9.95

RADIO PROMOTION HANDBOOK

RADIO PROMOTION HANDBOOK
By William A. Peck

By Wm. A. Peck. A complete guide on ways to develop better ratings, and increase sales! It's a proven fact! Clever and well-planned promotion campaigns lead to bigger audience ratings and greater sales! This brand-new publication is aimed at helping broadcast stations reap benefits of bigger and better promotional campaigns. Jam-packed with literally hundreds of ideas, and complete with scores of factual examples to spark hot, new ways of promoting a station, this is a book no progressive station should be without! The author, drawing on many years of experience, tells how to make everything that happens at your station help to PROMOTE your station. Both on-air and off-air campaigns are included: How to integrate on-air promotions with programming by means of contests, stunts, games, jokes, promotional announcements, station breaks, etc. Also, how to develop and tie-in off-air campaigns, personal appearances, sales promotional, public relations, and advertising in other media.
256 pps., 5 1/2 x 8 1/2", Comb-bound.
Order No. 267 only \$9.95

MANAGING TODAY'S RADIO STATION

By Jay Hoffer. A collection of critiques on the art, outlining principles evolved by the author during his 20 years as a broadcaster. Organized into three sections, the content encompasses management, programming, and sales. Part I considers two sides of a manager's environment—the personal and the impersonal with comments on his many duties, from politics to personnel. Part II covers programming, primarily from the management viewpoint, although also of value to the program director and announcer. Part III—Sales—offers help in finding and training salesmen, holding worthwhile sales meetings, setting rates, developing sales leads, etc. 288 pps.
Order No. 461 **Hardbound \$12.95**

SPECIAL—FREE OFFER!
Order \$25.00 of books from this ad, send remittance with your order, we'll send you this fascinating book about broadcasting absolutely FREE!

EDUCATION OF A BROADCASTER
by Harry Bannister, V.P., NBC. A racy, informative, anecdotal book studded with behind-the-scenes stories and highly personal opinions. Very possibly the best book written about the industry, it is an enthralling account of the growth of broadcasting.
Order T-79 only \$5.95



WHEN PIRATES RULED THE WAVES



Here's the complete story of the pop radio pirates who, for three years, operated unauthorized radio ships anchored off Britain's shores. For the first time, this book tells the full story of all the off shore radio stations—Radio Caroline, Radio London, and Radio Scotland, etc. The author describes how these stations grew and how they multiplied in number until competition among them reached—almost literally—the cut-throat level. The story is told of the dramatic events on the Radio City fort in the Thames, which culminated in the shooting of its owner. Interesting new light is shed on the often unsculptured people involved in pirate radio, and on the far from glamorous life of a pirate disc jockey. The author tells how the pirate operations got started, how they were conducted (with numerous photographs) and how they were finally silenced. 216 pps., 13 Chapters and Appendixes. **Hardbound, Order No. 299 Only \$7.95**

OTHER HELPFUL NEW BOOKS OF INTEREST TO BROADCASTERS!

MODERN RADAR: Theory, Oper. & Maintenance
Safford. A comprehensive handbook covering all types of systems—land based, aircraft, shipboard, police vehicle, earth satellite, weather-surveillance, etc. Everything you need to know is included in this complete volume. So that you will have a broad understanding of radar principles, the author traces the development of radar from its earliest stages, describing the various types of systems and explaining how each works. Familiarity with actual working systems will grow as you read about operational ground, airborne, and mobile equipment. The author shows how systems are put together and how they operate. In several cases, test and troubleshooting procedures are incl. 480 pps. **Hardbound \$9.95** **Order No. 575**

AUDIO SYSTEMS HANDBOOK
By Norman Crowhurst. Complete reference and guide to audio system design, encompassing home entertainment, commercial sound and studio installations. Chapter I, covering amplifiers and amplification, explains db and impedances, level limitations, insertion gain, plus a host of other basics necessary for practical system design. The author goes to great lengths to impart an understanding of these vital ingredients as they apply to overall operation. The same may be said of the treatment in succeeding Chapters on equalizers, mixers, filters, distribution systems, program sources, commercial systems, studios, and loudspeaker systems. 192 pps., 125 illus. **Hardbound** **Order No. 494**
List \$7.95

COMPUTER TECHNICIAN'S HANDBOOK
By Bruce Ward. If you have a working knowledge of semiconductors, you'll find in this brand new, up-to-date volume all the information you need to check, troubleshoot, and maintain computer systems. This giant text comparable to a 1000 hour course on computer maintenance—contains vital data on number systems, encoding and decoding, basic circuits, circuit blocks, counters, registers, memories, etc. With this book and a few weeks' study you can be well on your way towards being a knowledgeable computer technician. 480 pps., Hb. List \$10.95 **Order No. 554**

FIRE & THEFT SECURITY SYSTEMS
By Byron Wels. A handy guidebook on the selection, installation, and general maintenance of home and business security devices and systems. Describes many newly introduced systems from simple door and window switches to ultra-sensitive microwave sensing systems. There's also a wealth of information on sales, installation, and maintenance services—how to design the most effective and economical installation for any situation. 176 pps., Hb. List \$7.95 **Order No. 556**

CITIZENS BAND RADIO SERVICE MANUAL
Burns & Sands. This manual acquaints you with all the various types of units, and clearly explains how to troubleshoot and repair them. Included are step by step troubleshooting procedures with specific instructions and trouble analysis charts to help you quickly locate the cause of trouble in any stage or section. In addition, the authors describe numerous commercial units, which typify all the various designs in use. Complete full-size schematic diagrams for each design are included, along with a condensation of the FCC Rules regarding CB operation, plus FCC and EIA standards. 192 pps., plus schematic foldout section with 12 complete schematic diagrams. **Hardbound \$7.95** **Order No. 581**

ELECTRONIC MUSICAL INSTRUMENTS
By Norman H. Crowhurst. Covers the subject from basic, simple amplification to total electronic music generation. Begins with a look at traditional instruments and how they produce sound, then considers the electronic amplification of the traditional forms. The next step deals with instruments using the typical tone generators (strings, reeds, pipes, etc.), where electronics does more than simply amplify. From here the text moves into all electronic versions of traditional instruments. The next chapters discuss amplifiers and speaker systems for modern instruments and another chapter covers music synthesizers, the mysterious music-effect devices. There's also a chapter on troubleshooting electronic musical instruments. 192 pps. **Hardbound \$7.95** **Order No. 546**

BEGINNER'S GUIDE TO COMPUTER PROGRAMMING
Ward. Computer programming is really quite simple—once you understand the fundamental principles. This new book will help you develop that understanding because, simply, it begins at the beginning! Instead of working backward from a language, this book begins by developing a simple programming language of its own. Each concept developed by determining a need, then an instruction to fulfill that need. After you learn the basics, the author shows you how to prepare flowchart diagrams of actual programs. Then you begin transforming program requirements into "computerese." 384 pps. List \$9.95 **Order No. 574**

Absolutely the World's Greatest Radio Promo Sourcebook!

- ★ A GIANT 372-page Handbook—a virtual promotion encyclopedia!
- ★ Over 250,000 words with all the promo ideas you'll ever need!
- ★ Over 1500 on air promo themes adaptable to any format!
- ★ Contains over 350 contests, stunts, station and personality promos!
- ★ Bound in handsome 3-ring binder!



BRAND-NEW and up-to-date—geared to TODAY'S radio needs! Here's the **MUST** book for stations wanting to attract more listeners, boost ratings, increase sales and profits. **HANDBOOK OF RADIO PUBLICITY & PROMOTION** contains just about all the sure-fire promotion and publicity ideas a radio station might ever need—hundreds of specific plans that can be profitably used by any station. One idea alone of the hundreds offered can be worth many times the small cost of this indispensable sourcebook. Promotion is the keyword—the basic reason one station excels over another, all else being equal. Promotion is an important part—an integral part—of today's radio. Using the right approach you can give listeners a reason to tune in, a reason to keep listening, and at the same time make your station more salesworthy. True, few stations can afford a full-time staff of promotion experts, so here's the answer—a comprehensive handbook of hundreds of unique, exciting individual promotions, contests, stunts,

station and personality promos, etc. In each case, complete "nuts and bolts" details—how it works, copy details, prizes, sponsors, tie-ins—are included to enable you to adapt the idea to your own station format or sound. The author doesn't merely describe a promo or contest with a paragraph or two—he presents a synopsis of practical information, then provides complete instructions on how to plan it, sell it and program it. Covering 9 basic categories, the all-encompassing, audience-building contents include contests, outside stunts, fun promotions, special station promotions, promotions for special days, weeks, and months (categorized month by month), station anniversary promotions, on-air themes, plus general station and personality promos. Additional Sections are a source of fresh new ideas, offering quickie humor material, station IDs, humorous show openers, and more. **Order No. 213 only \$29.95**

NOW...FOR THE FIRST TIME...A DETAILED GUIDE ON WHO DOES WHAT AND HOW IT SHOULD BE DONE IN BROADCAST STATIONS!

ORGANIZATION & OPERATION OF BROADCAST STATIONS

By Jay Hoffer

Who does what, and how should it be done, in today's radio station? This new book answers these and scores of other perplexing questions by providing an in-depth examination of the job functions and responsibilities in modern radio—from manager to secretary, from announcer to salesman, from the traffic manager to the program director.

Here for the first time in a systematic and professional presentation is a complete run-down on all the organizational and operational aspects of running a broadcast station!

This unique new volume contains a wealth of information for anyone involved in, or interested in, broadcasting. Station owners and managers will find the answers to many of the problems they face every day for here, in well-defined fashion, is a clear cut delineation of station duties and responsibilities that takes the guesswork out of who does what, and how it should be done. Proper application of the enormous amount of practical data in this new book will help to insure that the station operates as a team. And extensive coverage of all the little "nitty-gritty" details of day to day operations will minimize those last minute crises. Other executives and employees will also find much of value in this monumental work. Apart from the interrelationship of one func-

tion with another, anyone interested in upgrading his capabilities will find the various in-depth descriptions of other jobs indispensable in furthering his own advancement. Yes, here is all the necessary background one needs to start and operate a station. It thoroughly explains in detail what is expected of everyone who works in radio. It matters not whether you're a pro, a rank beginner, or just someone who is seriously contemplating broadcasting as a way of life—everything you need to know is contained within the pages of this one handy volume!

This book tells it like it is! The author, a seasoned veteran, pulls no punches, he does not glamorize certain aspects and minimize others—it's straight down the middle. If you read this book thoroughly you'll know what it takes to attain professional efficiency in a specific function. 256 pps. 15 Chapters plus Index. Hardbound. Order No. 533 only \$12.95

AM/FM BROADCAST STATION PLANNING GUIDE by Harry A. Erkin. A comprehensive guide to planning, building, and operating a radio broadcast facility—AM, FM, or combined operation. Based on a lifetime of experience and intimate association in broadcasting, the author details how to find a frequency, apply for it, and how to plan and build a new station, or update and remodel an existing facility. Included are numerous floor plans, studio and transmitter building construction guidelines, tower and equipment specifications (including automation), preventive maintenance—plus thorough treatments on preparation of Form 301 and making proof-of-performance measurements. 160 pps. 8 1/2 x 11" Vinyl Cover. Order No. 500 only \$12.95

MODERN RADIO BROADCASTING

By R. H. Coddington. Here are the real "nuts-and-bolts" of modern radio operation, based on two decades of experience in all size markets—from the metropolitan goliaths to the "peanut whistle" variety. No matter what your interest in broadcasting—management, production, engineering, etc.—you'll refer to this encyclopedic volume time and again. Provides an in-depth view of the largest single category of broadcasting station operation—the so-called "small" market. Regardless of your present status in broadcasting—experienced or inexperienced, veteran or student—you can't help but move up the ladder armed with the straight-forward information presented in this book. Order No. 482 only \$12.95

MODERN RADIO BROADCASTING

By R. H. Coddington

By Sol Robinson. Here, in one handbook, are all the guidelines for station operation from starting a new facility to making a profit, from programming to accounting—one of those rare books which will prove valuable to both newcomers and oldtimers, and all those in between. For example, it tells how to develop sound programming, what to do about editorializing, "payola," lotteries, network shows, political broadcasts, the Fairness Doctrine, etc. It thoroughly delves into all types of market studies—population, demographics, audience preference surveys, advertising, etc. It offers guidelines for accounting procedures, filing FCC applications, operating in the public interest, commercial practices, etc., 256 pages. Hardbound. Order No. 467 only \$12.95

BROADCAST STATION OPERATING GUIDE

By Sol Robinson. Here, in one handbook, are all the guidelines for station operation from starting a new facility to making a profit, from programming to accounting—one of those rare books which will prove valuable to both newcomers and oldtimers, and all those in between. For example, it tells how to develop sound programming, what to do about editorializing, "payola," lotteries, network shows, political broadcasts, the Fairness Doctrine, etc. It thoroughly delves into all types of market studies—population, demographics, audience preference surveys, advertising, etc. It offers guidelines for accounting procedures, filing FCC applications, operating in the public interest, commercial practices, etc., 256 pages. Hardbound. Order No. 467 only \$12.95

etc. It thoroughly delves into all types of market studies—population, demographics, audience preference surveys, advertising, etc. It offers guidelines for accounting procedures, filing FCC applications, operating in the public interest, commercial practices, etc., 256 pages. Hardbound. Order No. 467 only \$12.95

CATV SYSTEM ENGINEERING: THIRD EDITION

By Bill Rheinfelder. Here is the new 3rd edition of what has become the accepted technical standard of the CATV industry... an expanded and revised version of the first and only authoritative book on planning, designing, and operating a CATV plant. Contains answers to problems encountered almost daily in any system. 256 pps. Order No. 298 only \$12.95

CATV SYSTEM MANAGEMENT & OPERATION

By Robert B. Cooper, Jr. A complete guidebook to CATV from locating new CATV situations, through acquiring a franchise, obtaining financing, opening and operating a system, budgeting, and buying and selling systems. While primarily non-technical in nature, this book covers the technical aspects the owner-manager should be aware of. It also discusses literally scores of helpful points on designing, installing, and constructing a cable system, including cost data. 256 pages. Order No. T-100 only \$12.95

CATV SYSTEM MAINTENANCE

The first and only book devoted to the maintenance of CATV systems, from the antenna through construction techniques, to complete trouble-shooting. Includes adequate technical data on system design. Major emphasis is on maintenance—providing a wealth of information on how to locate and correct equipment failures, including tips on how to eliminate various types of interference and radiation problems at the head end. Step-by-step maintenance charts are included. 192 pages. Order No. T-82 only \$12.95

CATV OPERATOR'S HANDBOOK

Completely covers all aspects of the subject, from obtaining a franchise to financing and planning a new system... from installing a plant, promotion, selling hookups, to the very latest topics such as local program origination. Contains tested and proven information essential for practical day-to-day operations as well as for reference. 160 p. Order No. T-73 only \$7.95

SAVE \$11.85 ON CATV Combo
All 4 books above, only \$34.95

RADIO NEWS HANDBOOK—NEW SECOND EDITION



By David Dary. This updated and revised handbook is written for both aspiring and experienced broadcast journalists. Serves as a day-to-day guide as well as a source of vital information for those practicing newsmen who are endeavoring to improve their professional status. For the beginning newsmen, there is a solid grounding in radio news basics, mechanics, and style, plus necessary details on the workings of a radio newsroom. Announcers, salesmen, and even managers will find Radio News Handbook a helpful guide in understanding and working with their news departments. 192 pps.; heavily illustrated; Hardbound. Order No. 216 only \$7.95

ANATOMY OF LOCAL RADIO-TV COPY



By Wm. A. Peck. Guaranteed to be the most valuable thing a radio-TV writer can get his hands on... next to a typewriter! This new, enlarged, updated 3rd edition of a real industry classic contains over 40% new material, loaded with hundreds of ways to increase station billing with sales-proven copy. Its purpose is to help you remove the "error" from the trial and error system. The techniques described have passed the most critical test to which advertising can be subjected... they sold the merchandise! 16 chapters include more than a hundred sample commercials of all types, making the book a veritable copy library! Order No. T-90 only \$5.95

THE MAN BEHIND THE MIKE



By Hal Fisher. The "Guide to Professional Broadcast Announcing" offers the practical help you need. Use of the down-to-earth pointers in this massive 288 page volume will help both seasoned veterans and "green" announcers. Offers practical guidance on every phase of announcing. Contains over 40 drills to spark interest. Tells how to develop true professional talents, how to become a good d.i., newscaster or other specialist. Managers and program directors will find a wealth of data to guide them, in addition to a host of management and programming ideas. 288 pps; 21 ch. Hardbound. Order No. 266 only \$7.95

RADIO SALES PROMOTIONS



300 Merchandise Moving Ideas! A compendium of more than 300 creative selling ideas designed exclusively for radio stations. Here are sales tools that work! A vast supply of ready-to-use ideas for producing sales in 43 categories, from air conditioners to washing machines. Based on the premise that radio time must make a sponsor's cash register ring, here are powerful, positive ideas that will do just that... and add thousands of dollars of revenue to your own till in the process. Unbelievable? Try them for yourself and see... on our money-back guarantee. BIG 8 1/2" x 11" size. Order T. 214 only \$10.00

TECHNICAL PAPERS PRESENTED AT THE NAB ENGINEERING CONFERENCE

These complete transcripts include the technical papers presented at the Conferences, plus a transcript of the FCC Industry Panel discussion. Contain all the photos, slides and drawings presented in conjunction with the technical talks. All the very latest developments are covered. Here are volumes that belong on the shelf of every station library—something every broadcast engineer should read and reread several times. These Official Proceedings are a wonderful source of ideas, and provide the answers to many troublesome problems. Invaluable as aids in helping stations make important buying and engr. decisions. Each 256 pps., BIG 8 1/2" x 11" size.
1967 NAB PROCEEDINGS; No. T-140; only \$10.00
1968 NAB PROCEEDINGS; No. T-148; only \$10.00
1969 NAB PROCEEDINGS; No. T-149; only \$10.00
1970 NAB PROCEEDINGS; No. T-170; only \$10.00
1971 NAB PROCEEDINGS; No. T-171; only \$10.00

SPECIAL OFFER!

SAVE \$5.05—Order Any 2 Proceedings, for \$14.95
SAVE \$10.05—Order Any 3 Proceedings, for \$19.95
SAVE \$15.05—Order Any 4 Proceedings, for \$24.95
SAVE \$22.05—Order ALL 5 Proceedings, for \$27.95

INTERPRETING FCC BROADCAST RULES & REGULATIONS. (Volume 2)

This brand new reference discusses the most recent FCC decisions on important subjects. The material in Volume 2 is completely new, none of it duplicates the data in Volume 1. Indispensable for broadcast station personnel. 192 pages, 20 chapters. Order T-492 Comb-bound \$6.95

PLANNING THE LOCAL UHF-TV STATION



By Patrick S. Finnegan, V-P & Ch. Engr. WLBC & WMUN. This brand-new guide describes all requirements for planning, building and operating a small, expandable UHF station. A valuable reference for station owners, managers and engineers containing practical data on eopt., layout and economic factors involved. Includes many do-it-yourself hints and cost-cutting tips. 12 Chapters. Order T-43 only \$10.00

NO RISK COUPON—MAIL TODAY

TAB BOOKS, Blue Ridge Summit, Pa. 17214

Please send me book(s) listed below.

I enclose \$ _____

Please invoice on 10-day FREE trial.

Name _____

Station or Co. _____

Address _____

City _____ State _____

SAVE POSTAGE by remitting with order. B-32
Foreign add 10% Pa. add a tax

Tech Notes

The purpose of this column is to present interesting solutions to technical problems, new circuits, and other features that relate to a broadcast engineer's job. We welcome your contributions.

From Sidney King of KVOC (AM), Casper, Wyoming, comes this solution to a remote broadcast problem. For economy, many radio stations use business phones rather than

**THE
LEADER
IN
CATV
TOWERS**

*"Quality—Service
and Price!"*



Yes, quality, service and price on CATV systems are the reasons for Fort Worth Tower's position as the industry's leading supplier. Experience gained as a pioneer supplier of CATV enables Fort Worth Tower to provide you with a quality product at a price that is reasonable and attractive.

Take advantage of our experience. For assistance in systems planning, engineering and complete systems quotations . . .

CALL OR WRITE TODAY

Fort Worth Tower

COMPANY, INCORPORATED

P.O. Box 8597, Fort Worth, Texas
(817) JE 6-5676

—Associated Companies—
Tommy Moore, Inc.
Big State Engineering, Inc.
Tower Construction Finance, Inc.

Circle 121 on Reader Service Card

broadcast loops for remotes. The usual interface has been what the telco calls a *recorder coupler*. The remote amplifier drives the coupler, which in turn drives the phone line. The problem: If a disconnect occurs, the man at the remote is unaware. The station then has to use a separate line to call the remote man, so he can hang up the phone and connection can be re-established.

Kvoc and the Monarch Network (a regional sports network) worked with local telco people to solve the problem. Strangely enough, the answer wasn't newly developed equipment. It was a recorder connector which has been part of the Bell Telephone System equipment for many years. Note that the *recorder connector* is completely different in operation from the *recorder coupler*.

The recorder connector (List #1, USOC Code RDC) is a completely self-contained unit which is fed directly from a remote amplifier, and which is connected through a standard telephone plug to the leased phone line. The station originates the call by dialing the assigned number. On the first ring, the recorder connector establishes connection, feeding audio back to the station.

While an ordinary telephone is normally attached to the recorder connector, it's wired so that the transmitter (mouthpiece) will not function when the recorder connector is active. Actually, a broadcast may be originated and completed without the use of a telephone at the remote, in other words using only the recorder connector.

Kvoc and the Monarch Network have mounted both phone and recorder connector on a small portable board with handle (see Fig. 1). Kvoc then requests the telco to install a four-prong standard female telephone jack and determine the

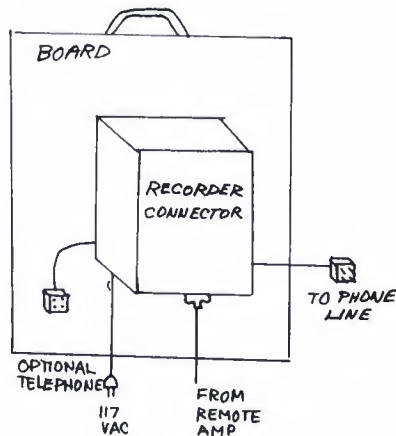


Fig. 1. Portable board with handle holds phone.

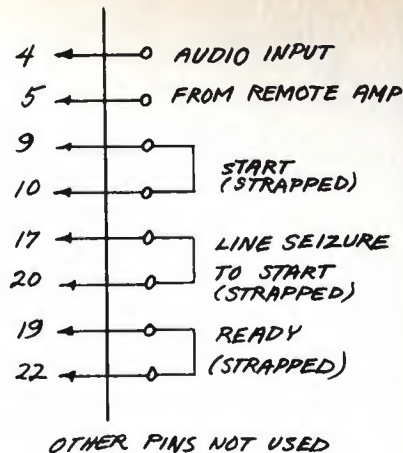


Fig. 2. Wiring diagram.



Photograph of network which feeds sports and other events throughout the state.


telephone number at the origination point. Upon arrival, the recorder connector, using a male phone jack, is plugged in. A 117-Vac source is also required. See Fig. 2 for wiring connections at the 25-pin plug used between the remote amp and the recorder connector. (This plug can be either a Cannon DB-25P-C26 or a Cinch DBM-25P-A115.)

Kvoc has found that with this method, when a disconnect occurs, it's only a matter of some 15 seconds for the station to redial the number and be reconnected to the remote.

Monarch Network not only originates its sports events in this manner, but feeds some 15 other radio stations. These network affiliates dial into separate recorder connectors, each with its own telephone number.

A final point: When a broadcast loop breaks down, it takes time to locate and fix the trouble. Using a business phone, if the line breaks down, the station simply hangs up, redials, and gets a new line. **BM/E**

GOING REMOTE? TELEMET'S YOUR VOTE.

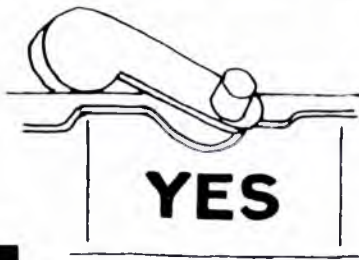


YES



VIT VIDEO TEST PACKAGE 3550-A1

Completely fulfills FCC requirements for remote control broadcasting per FCC 73.676 (f). Modular construction means the 3550-A1 is fully adaptable to any future change in test formats. Price: **\$3,900**

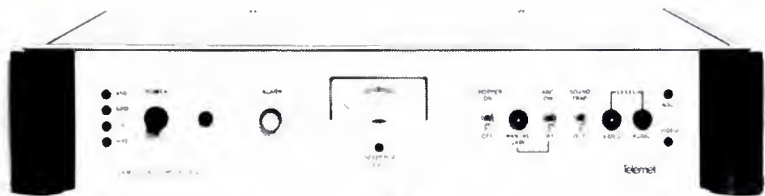

BROADCAST DEMODULATOR 4501-A1

Offers the widest available range of input levels. Monitors from the studio or at the transmitter. Any differences found in off-air tests can be qualified by taking the 4501-A1 to the transmitter for a formal evaluation of the transmitter.

The unit features a synchronous chopper and switchable soundtraps.

Operates from RF levels of 5 mv to 5V RMS. **\$3,000** VHF
\$3,150 UHF

For complete details and technical specifications write or call.



A GEOTEL COMPANY
Amityville, New York 11701 (516) 541-3600

VISIT US AT NAB, Booth 213

Circle 122 on Reader Service Card

AIR COOLED NEW 5kW Load NO FANS • NO WATER

The new Bird Model 8785 TERMALINE® Coaxial Load Resistor dissipates 5000 watts continuously in ambient air without blowers or cooling water.

It is ideal as a "dummy" antenna for design, testing, and maintenance of transmitters, and for RF power measurement of CW, AM, FM, SSB and TV signals to 5kW average in conjunction with a Bird THRULINE® Wattmeter.

A 7.5kW version is currently under development.

SPECIFICATIONS:

TERMALINE® MODEL 8785 RF LOAD RESISTOR

POWER RATING: 5000 watts continuous

VSWR: 1.10 max DC to 1 GHz

1.25 max 1 to 1.5 GHz

INPUT CONN: 3/8" — 50 or 51.5 ohms

SIZE: 17" DIA x 33" H (38" with dolly)

PRICE: \$1295

THRULINE® MODEL 460 RF WATTMETER

(shown mounted on Load)

POWER RANGES: 1 — 5kW

FREQUENCY RANGES: 2 — 1000 MHz

PRICE: \$235 Plug-In Element: \$50



NEW 5kW TERMALINE®
(shown with THRULINE®)

NAB continued from page 18

stereo material without significant phase cancellation. IGM will also have four complete working radio automation systems on hand. Systems Marketing Corporation (Sono-Mag) will also show radio automation, featuring the DP-1 digital programmer and switching system—a ferrite core random access program system which can handle more than 80 events per hour for 24 hours.

Philips Broadcast Equipment Corp. will show a line of Norelco cameras, introducing the brand new broadcast color studio chain PC-72 (at this point still so new we can't tell you its features). Also on hand will be the latest version of that old favorite, the PC-70S-3, and another broadcast studio model, the PC-100A. You can also see the PCP-90B digital camera and the moderately priced LDH-1 chain. There will be two telecine chains on display, PCF-701 and LDH-1 telecine. Other equipment shown by Philips will include a 17.5-kW TV transmitter, plus much audio gear. (And watch for a big surprise in the area of videotape.)

CBS Labs has a host of products. A new solid state FM Volumax will be unveiled. A unique paralleling processing circuit provides positive peak control yet insures excellent high frequency response even during high levels of limiting. Also on hand from CBS, the Mark III image enhancer and NTSC chroma keyer (model 7000), and a new audio distribution amplifier (16 outputs). CBS's exhibit will include the vidifont titling equipment.

McMartin will be there with a new look—beige panels with wood grain trim is the new emphasis. New equipment includes the TBM-3700 combination FM frequency and modulation monitor. The company will also have a state-of-the-art design FM relay receiver on hand. For VHF-TV, McMartin now offers a complete monitor package: a TBM-5000 frequency monitor has been added to its aural monitor line. The company will be introducing also an RF amplifier for remote monitoring. There will be monitoring equipment for the AM broadcaster and some new mixers.

The Rust Corporation will show a special digital remote control and automatic system for TV installations. It includes new status alarm capabilities with a separate modular expansion feature for control and telemetering functions. **BM/E**



BIRD

ELECTRONIC CORPORATION

Cleveland (Solon) Ohio 44139 • 30303 Aurora Road
Ph. 216-248-1200 • TWX 810-427-2687 • Cable BIRDELEC

See Us At Booth 323 NAB Show

Circle 123 on Reader Service Card

Spotmaster

Compressor-Limiter Amplifier



(The Great Leveler)

\$445!


You can stop riding gain now, even when a shouter and whisperer are on the same talk show. The Model CLA 20/40 Compressor-Limiter Amplifier does it automatically . . . instantaneously . . . for both AM and FM. Switchable controls permit symmetrical (FM) or asymmetrical (AM) peak limiting; pre-emphasized or flat response; compress/limit, compress only, or compress/limit off. Automatic gain control range is 40 dB dynamic, and the compression ratio is better than 10:1. All solid state, plug-in modular construction assures trouble-free reliability. Write for complete details.

BROADCAST ELECTRONICS, INC.

A Filmways Company

8810 Brookville Rd., Silver Spring, Md. 20910

the BPC-101C DIGITAL CLOCK

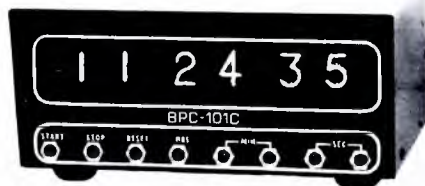

- a 12 or 24 hour clock
- a stop watch
- an elapsed time indicator up to 100 hours

Featuring: 6 digit display in hours, minutes and seconds Full front panel access to all controls Easy to read Remote stop, start and reset 3 1/2" high by 7 1/2" wide Operates on 115 VAC, 60Hz power.

Now Only **\$295**



BROADCAST PRODUCTS, INC.

880 Loftstrand Lane • Rockville, Md 20850
Phone: (301) 484-4700

Circle 124 on Reader Service Card

lines, both antennas (over one particular path), multi-path reception and mismatches at the demodulator input. These are well known "perils of the radio path." It is well known that pictures suffer a lot less from distortion than do test signals. Test signals are especially designed to be sensitive to specific distortions. A distortionless radio path probably is seldom, if ever, existent. Much more important is its stability. After all, the concept behind remote monitoring of the transmitter lies in detecting changes in its performance, not in conducting continuous proof-of-performance tests. This is recognized in the language of the new rules.

It is interesting to consider the detectability of well displaced echoes using the bar on line 19. It is free of noise and distortions which occur earlier than the STL input or output (Field II). A 40 dB down echo (ghost) will introduce a step of 1 IRE on the top of this bar. This is readily observed and the relative path length readily measured, locating the source of the reflection.

Checking up on the future

Color cameras, videotape recorders and studio video equipment have now reached a performance level that will bring about great pressure to improve the transmitter.

Improvement in transmitters and transmitter operation are clearly possible. Much effort has been expended in the past few years to develop precision video test signal generators and waveform and picture monitors. It appears that transmitter testing may be where significant measurement improvements are most urgently needed and will be forthcoming.

The heart of the transmitter testing is a precision demodulator. New demodulators have recently been introduced and more are coming. These attack the quadrature distortion and group envelope delay problems in a variety of ways.

With standardized test signals, and precision demodulators, the next step will probably be automated video measurements. These could be done at the transmitter and telemetered back to the transmitter operator—possibly using Line 17 of the vertical blanking interval. This eliminates the serious problem of the perils of the radio path in transmitter remote control. The suggested use of Line 17 to telemeter the measurement data is but one possible method. It is one of many potential uses for Line 17, in addition to that already being discussed (test signals on international, i.e. satellite, transmissions). As those signals need not be radiated by the broadcaster, he might seek other uses for this line.

Intelligent speculation about the future need hardly stop here.

BM/E

ALL DIGITAL REMOTE CONTROL



A NEW CONCEPT IN TV~FM~AM REMOTE OPERATION

CONTROL~LOGGING~STATUS

We proudly introduce the "D" series Remote Control System. This all digital system provides remote control and metering, automatic transmitter logging, status indications, and more! Visit us during the NAB Convention, Booth 224, West Hall. Also on display: **Aural STL, conventional remote control, all solid-state remote pickup and related items.**



MOSELEY ASSOCIATES, INC.
SANTA BARBARA RESEARCH PARK

111 CASTILIAN DRIVE
GOLETA, CALIFORNIA 93017
(805) 968-9621

Circle 125 on Reader Service Card

Public Auction

By Order of the Owner, Bankrupt Assets Formerly of WKTR-TV
WKTR-TV

1630 E. Stroop Road Kettering, Ohio

(A Suburb of Dayton, Ohio (S.E.))

Directions: East off I 75 at Exit 32

TUESDAY — MARCH 14, 1972 — 11:00 A.M., E.S.T.

LATE MODEL (1967 or LATER) COLOR TV STUDIOS

CAMERAS: 2 R.C.A. TK-42 Color Cameras W/TD9-BC Pedestals (New 1967), R.C.A. TK-60 Monochrome W/TD-3 Pedestal (New 1967)

R.C.A. FILM CHAIN (New 1967), TK-27 Color Film Chain W/TK-22 Camera, 2 TP-66 Projectors, TP-15 Multiplexer, TP-Slide Projector

R.C.A. VIDEO TAPE RECORDERS: TR22C Low Band Color W/Elec. Editing (New 1967), TR-4 HI/Low Band Color (New 1968), TR-5 Low Band Color (New 1967)

AUDIO: R.C.A.-BC7A Console, R.C.A. RT-21 Reel to Reel Recorder, Mikes, Decks, Amplifiers, Cartridges, etc.

R.C.A. TERMINAL EQUIPMENT: TS-40 Switcher W/TE-60B Special Effects Unit (1967), 2-TG-3 Color Sync Generators, 6 TA-34 Pulse Dist. Amps., 6 TA-33 Video Dist. Amps.

MONITORS—COMPLETE KLIIEGL LIGHTING PACKAGE W/DIMMER PANEL—COMPLETE FILM AND DARK ROOM SET UP—TEST EQUIPMENT, FILM LIBRARY, COMPLETE AUDIO CONSOLE W/TURN TABLES—OFFICE EQUIPMENT — (LARGE QUANTITIES)

INSPECTION: 9:00 A.M.—4:00 P.M.—MONDAY, MARCH 13, 1972

For illustrated brochure please contact:

L. M. Koploy Company

Auctioneers • Liquidators • Appraisers

17597 James Couzens (Area 313) 864-1889 Detroit, Michigan

FCC RULES continued from page 16

classifications. Indeed, the Commission sanctioned one licensee for logging as PSA spot announcements dealing with a drug information program, to be sponsored by industrial concerns in return for "institutional identification" at the beginning and close of the message.⁷ Because the licensee is receiving consideration for broadcasting such announcements, he is required to log them "commercial." In an extension of this principle, the Commission held that 1) the fact that the licensee derived no substantial direct benefit from advertisements of a lottery to be held at a county fair, and 2) that his principal intention was to advertise the fair did not constitute a defense to his logging such announcements as PSA.⁸ The Commission reasoned, "the very fact that one had to be present at the fair for which admission was charged" constituted a consideration for the announcement which placed it in the "commercial" category.

Because the Commission has, increasingly, been disposed to impose substantial forfeitures on licensees for logging violations, it is the wise broadcaster who exercises due care in meeting Commission requirements in this area. When necessary, broadcasters should 1) supply *extra information* for purposes of clarifying their chosen logging classifications, and 2) *consult with communications counsel* when classification difficulties arise. No less an effort will suffice to meet Commission requirements. **BM/E**

7. Chemung County Radio, Inc., 18 RR 2d 165 (1970).
8. 21 RR 2d 203 (1971).

Spindler & Sauppé TV film chain 2x2 projectors

your widest
and wisest choice

Seven models in all — one of which will fit your needs *exactly*. Color or monochrome; uniplex or multiplex; forward or reverse actuation; sequential or random access; 16- to 96-slide capacity. These are thoroughly proved performers, built to the highest professional standards, and recently updated with advanced electronics.

For complete information, write
Spindler & Sauppé, 13034 Saticoy St.,
North Hollywood, Calif. 91605;
phone (213) 764-1800.

**See us at NAB in Chicago,
Booth 311, Continental Room**



SPECTRUM 32B: The most advanced film chain slide projector available. For color or monochrome chains; 32-slide capacity. Many exclusives. Operates at 120V, 50/60 Hz. Spectrum 32F operates at 220V, 50/60 Hz.



MODEL 332: Newest version of the workhorse of the industry. For monochrome chains; 32-slide capacity. Model 322: single turret for 16 slides, monochrome or color.



MODEL SLX-TV: 96-slide capacity, random access. **Model SLS-TV:** 48-slide, random access. **Model SLD-TV:** 96-slide, sequential. **Model SLR-TV:** 48-slide, sequential, forward/reverse. All for monochrome or color chains.

Circle 126 on Reader Service Card

BM/E CLASSIFIED MARKETPLACE

CLASSIFIED ADVERTISING RATES

DISPLAY CLASSIFIED ADVERTISING: \$22.50 per inch 1x; \$22.00 per inch 3x; \$21.00 per inch 6x; \$20.00 per inch 12x. ALL OTHER CLASSIFIED ADVERTISING 25¢ per word; minimum \$3.00. BLIND BOX NUMBER: No extra charge. Replies sent to address below will be forwarded to you. PAYABLE IN ADVANCE; send check with order. CLOSING DATE: 5th of 2nd month preceding issue date.

BM/E, Monterey and Pinola Avenues, Blue Ridge Summit, Pa. 17214 Phone 717/794/2191

BUSINESS OPPORTUNITIES

FRANCHISE DISTRIBUTORSHIPS FOR SEEBURG BACKGROUND MUSIC

We are expanding our distributor territories, and offer to those who qualify franchises for background music, with phone lines, FM Multiplex, or on-premise systems.

Complete details forwarded on request:
Address:

Joseph F. Hards, Vice Pres.
SEEBURG MUSIC LIBRARY, INC.
1500 North Dayton Street
Chicago, Illinois 60622

HELP WANTED

SALES ENGINEER VIDEO BROADCAST
Nationally known manufacturer of video broadcast equipment requires sales engineer to satisfy expanding markets in direct studio, OEM, CATV, and closed circuit sales. Established territory in the southeast area. Related broadcast and/or sales experience necessary. Salary commensurate with experience plus commission in addition to expenses. Submit resume including salary history to Personnel Dept., Telemet, 185 Dixon Ave., Amityville, N.Y. 11701. Interviews to be conducted at NAB '72 in Chicago, Booth #213. An equal opportunity employer.

CIRCUIT DESIGN ENGINEER
Company is engaged in design and manufacture of quality television broadcast equipment. Knowledge of video and digital circuitry is required. Send resume to the vice president, Mustang Electronics Division, Lenco Inc., #319 West Main, Jackson, Mo. 63755.

Colorado: KDGO-CBS has opening for announcer-boardman. Secondary abilities in engineering, news or other helpful. Conservative MOR-Type only. Send tape-resume-photo-salary expected to: Marcie Fitch, program director, KDGO-CBS, Box 3390, Durango, Colo., 81301.

Sales opening in Upper Midwest. Experience in sales, news, or announcing required. Send resume, photo, Box 372-2, BM/E, Blue Ridge Summit, Pa. 17214.

POSITIONS WANTED

Beginner, B.S., 3rd endorsed, draft exempt, looking for position anywhere in U.S., Canada, or Mexico. Anthony La Giudice, 307-C Faller Drive, New Milford, New Jersey 07646. (201) 265-1670.

Announcer DJ limited experience, willing to work hard. Any hours. 3rd phone, trained voice, married, will relocate. Bill Williams, 1545 Beatrice, Detroit, Mich. 48217. (313) 843-0710.

Young man with first desires position as combo man. Would like work in Midwest. Any small station. Contact Ron Clark, 5512 Ralston, Raystown, Mo. 64133. Phone (816) 353-8171.

C&W, Rock Jock. 3rd Endorsed. Single. Any location, Don Mayer, 511 Geyer, Frankenmuth, Mich. 48734.

Arizona, Nevada, New Mexico—General Manager/Chief Engineer position. Broad background AM/FM/TV. Successful professional wants to be an asset to your Pacific South West station. For resume write BOX 372-3, Blue Ridge Summit, Pa. 17214.

EQUIPMENT FOR SALE

SCHAFER 800 AUTOMATION SYSTEMS

Well-maintained systems available for immediate purchase. Each complete with 6-8 program decks, network switches, and spotters for carousels. TRU-8 production units also available. Box 372-1, BM/E, Blue Ridge Summit, Pa. 17214.

NEW FOR 72! ROH INC. Solid State Audio Modules designed for AM, FM, TV, Recording Studios. 5 Output Audio DA-\$70. 5 Output Audio DA (balanced transformer outputs)-\$120. 12 Input Active Combining Network-\$55. Microphone Preamp-\$55. Line Amplifier-\$65. 10 Watt (RMS) Monitor Amplifier-\$70. 2A 24VDC Supply Module for all above modules-\$70. 19" X 5 1/4" Wired Module Tray (holds 9 modules and 2A supply)-\$190. 19" X 3 1/2" Wired Module Tray with 1A 24VDC Supply, (holds-2 modules)-\$130. Modules also will plug into standard 22 contact edge connector. **FREE BROCHURE! SYSTEMS ENGINEERING CO.** P.O. Box 49224, Atlanta, Ga. 30329 404-237-4464.

New custom Audio Console still crated at factory. The console is intended for network television use, but has all recording studio facilities. 25 input modules with eq., echo, mike and high level inputs. 32 additional mike inputs. 8 channel out. Stereo and mono mix down. 28 50 watt monitor amps. Studio headset system, cue system. Call for detail description and picture available. Available at 50% of cost. David Music, Inc., 1650 Broadway, New York, 10019. 247-2159.

FOR SALE: 1 IGM automation, Model 500S, consisting of: A-F Channels, music selector, two Scully 14-inch playback, two cart machines playback, 1 cart machine playback and recorder, three carousels—random select, three 18-inch custom racks, one time announcer, and one remote control and end coder. Also have one used Collins 300C transmitter designed for 100 and 250 watts for sale. WWC Radio, P.O. Box 580, Wilkesboro, N.C. 28697.

SCULLY TAPE RECORDERS: Mono, 2, 4, 8, 12, & 16 track models plus 270 automatic players. Some models in stock now. W.A.L. custom audio control consoles & console modules. Solid state 120 Watt power Amps. We buy and rebuild Scully lathes. **WIEGAND AUDIO LABORATORIES, INC.** R.D. 3, Middleburg, Pa. 17842, 717-837-1444.

SOLID-STATE AUDIO PLUG-IN OCTAL (1" Dia x 2" H) modules. Mic preamps, disc & tape preamp-equalizers, tape bias osc. & record ampl., power amps & power supplies. Send for free catalog and audio applications. Opamp Labs., 172 So. Alta Vista Blvd., Los Angeles, Cal. 90036.

FIELD STRENGTH METER. 540 KHz to 5MHz, Ten microvolts to 10 volts per meter. New solid state design, long battery life. Stable accurate calibration. Free literature. Solar Electronics, 901 No. Highland Ave., Hollywood, Cal. 90038.

JAN-6544 Tubes reg. cost \$940.00 NEW & UNUSED @ \$200.00: AUDIO WAVE ANALYZER GEN. RADIO MODEL 736A. Range 0-16,000 cycles USED GOOD CONDITION—\$150.00. R. F. VOLT METER BOONTON MODEL 91H. Complete W/Probes USED GOOD CONDITION—\$200.00. H&H Sales Co. 664 Main St., Barboursville, W. Va. 25504 Phone (304) 736-1777.

2 RCA TK60A 4 1/2-inch I.O. cameras. Includes 350 feet camera cable per camera, remote control panel, WP16 power supply, instruction books, 75-foot and 5-foot remote control cables. Price \$3,000 each f.o.b. Green Bay, Wis. Contact: M. Williamson, WLUK-TV, Box 7711, Green Bay, Wis. 54303 (414) 494-8711.

EQUIPMENT FOR SALE (cont'd)

MOTORS FOR SPOTMASTERS
NEW Papst hysteresis synchronous motor HSZ 20.50-4-470D as used in series 400 and 500 machines. Price \$39.00 each prepaid, while they last. 90 day warranty. Terms: check with order only, no COD's. Not recommended for Tapecaster series 600 or 700.

TAPECASTER TCM, INC., Box 662
Rockville, Maryland 20851

RCA TT 50AH television transmitter. Available 2nd quarter 1972. Consists of RCA monitors and transmitter control console. Eighteen years old, operating on Ch. 13. Well maintained, clean inside and out, excellent condition. Aural and visual final completely overhauled six months ago. Excellent standby transmitter. Contact Welton M. Roy, Chief Engineer, WHBQ-TV, Box 11407, Memphis, Tennessee 38111. Tel. 901-323-7661.

CARTRIDGE TAPE EQUIPMENT — Completely rebuilt and reconditioned. Tapecaster and Spotmaster record playback \$375.00. Playbacks \$250.00. 30 day money-back guarantee **AUTODYNE, P.O.** Box 1004, Rockville, Md. 20850 (301) 762-7626.

AMERICA'S LARGEST STOCK AND CONSIGNMENT LISTING of new and used broadcast and recording equipment. We trade-sell and buy. **THE MAZE CORPORATION, P.O.** Box 6636, Birmingham, Ala. 35210.

AMPEX 300, 350, 352, 400, 450 uscrs. for greater S/N ratio, replace first playback stage 12S17 with our plug-in transistor preamp. For specification write **VIF INTERNATIONAL, PO** Box 1555, Mtn. View, Ca. 94040.

B/W MOBILE VAN with (2) Ampex VTR-1000, low head use. (2) G. E. Cameras, new I.O. tubes, Cohu Sync Gen. & D.A.s. (New). Telemet Multiburst (New). Plus many extras. Can be seen in San Francisco. 415-776-9211.

Heljax-styroflex. Large stocks-bargain priced-tested and certified. Write for prices and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Phone (415) 832-3527.

Our latest used equipment bulletin is out! If you have not received your copy, write us. The Maze Corporation, P.O. Box 6636, Birmingham, Alabama 35210.

100W UHF TRANSLATOR: EMCEF UHRTU-100 and SL8-75 Antenna gives 1.0 KW ERP. Presently Ch. 20 In/Ch. 75 Out. J. Merritt, WICS-TV, Springfield, Illinois.

MIKE BOOM. Mole Richardson Type 103-B with perambulator. Mint condition. **KLUGE FILMS** 5350 W. Clinton Av., Milwaukee, Wi. (414)-354-9490.

Mica and vacuum capacitors. Price lists on request. Surcom Associates, 1147 Venice Blvd., Los Angeles, Ca. 90015. (213) 362-6985.

The complete and reliable source for new and used broadcast equipment. Request our free listings. Broadcast Equipment and Supply Co., Box 3141, Bristol, Tennessee 37620.


Any type tower erection finance. Bill Angle, Tel. 919-752-3040. Box 55, Greenville, N.C. 27834.

EQUIPMENT WANTED

WANTED: SONY or PANASONIC 1/2" VTRS for Christian Bible study. Trinity Association, 8009 Lyndon, Detroit, Mich. 48238.

PROGRAM SERVICES

TAPES FOR AUTOMATION



THE CnB STUDIOS
Specializing in Custom Services

3415 BERESFORD AVENUE
BELMONT, CALIFORNIA 94002
415 / 592-6149

"Free" Catalog . . . Everything for the deejay! Comedy, books, airchecks, wild tracks, old radio shows, and more! Write: Command, Box 26348-A, San Francisco 94126.

continued on page 52

AM MICROWAVE



IS BEST FOR CATV LET US PROVE IT!

AM Microwave offers numerous distinct advantages in many applications and CATV is one of them. When specifying your system consider the following features that Soladyne has built into the Model 1501 TV... the most compact ruggedly designed transmitters and receivers available today.

EASY TO INSTALL—Transmitter and receiver mounts on the rear of the antenna with only a single RG 59/U cable connection. No expensive waveguide required.

SMALL SIZE—Simplified circuitry has reduced component count to a minimum. Either transmitter or receiver weighs only 6 pounds.

CONSERVES SPECTRUM—By using only 12.5 MHz, Soladyne's AM permits the simultaneous use of both group A and B channels.

SIMPLE TO MAINTAIN—All assemblies can be quickly and easily replaced in the field... no soldering required.

COSTS LESS—Soladyne's 1501 TV is priced at less than one half the cost of systems with comparable performance.

ASK FOR A DEMONSTRATION

Call or write today for a bench demonstration, your facility or ours, and let us show you the many cost and performance advantages of 1501 TV.



**SOLADYNE
INTERNATIONAL, INC.**

A Subsidiary of Rohr Industries, Inc.
7455 CONVOY COURT • SAN DIEGO, CA. 92111
(714) 279-7872

Circle 128 on Reader Service Card

PROGRAM SERVICES (cont'd)

Mike Sullivan says, "Crime doesn't pay. It steals." Free comedy sample, Sullivan's Comedy Tonight, 4301-7th. Avenue South, Birmingham, Alabama 35222.

TECHNICAL SERVICES

CUSTOM CARTRIDGE RELOADING and refurbishing. Fidelity replacement parts and cartridges. Write us today for prices. PROFESSIONAL AUDIO SERVICES, BOX 1953. FT. WORTH, TEX. 76101.

CONSULTANTS

JANSKY & BAILEY

Telecommunications Consulting
Department

CATV & CCTV

Phone 202/296-6400
1812 K Street N.W.
Washington, D.C. 20006
Atlantic Research
The Susquehanna Corporation

INSTRUCTIONS

First phone through tape recorded lessons at home plus one week personal instruction in Washington, D.C., Atlanta, Boston, Detroit, New Orleans, Minneapolis, Seattle, Denver, Portland, Los Angeles. Proven results. Our 17th year teaching FCC license courses. Bob Johnson Broadcast License Training, 1060D Duncan, Manhattan Beach, Calif. 90266. 213-379-4461.

ATTENTION VETERANS! First class license in five weeks with complete theory and R.C.A.-equipped laboratory training. Approved for veterans. Tuition \$333.00. Housing cost \$16.00 per week. American Institute of Radio, 2622 Old Lebanon Road, Nashville, Tenn. 37214. 615-889-0469.

PROFESSIONAL CARDS

VIR JAMES
CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
345 Colorado Blvd.—80206

(303) 313-5562
DENVER, COLORADO
Member AFCEE

COHEN & DIPPELL
CONSULTING ENGINEERS

Formerly GEO. C. DAVIS

527 Munsey Bldg.
(202) 783-0111
Washington, D. C. 20004
Member AFCEE

PUBLICATIONS

BROADCASTING AND THE LAW

A publication for the entire station staff. Keeps you advised of FCC rule changes, court decisions, and Congressional actions affecting you... in a unique way. For further information and a sample copy write:

BROADCASTING AND THE LAW

Box 8357
Knoxville, Tennessee 37916

ADVERTISERS' INDEX

American Telephone and Telegraph Company	9
Belar Electronics Laboratory Inc.	19, 52
Bird Electronics Corp.	48
Broadcast Electronics, Inc.	38, 48
Broadcast Products Co., Inc.	48
CBS Laboratories, A Division of Columbia Broadcasting System, Inc.	Cover 3
Canon U.S.A. Inc.	7
Central Dynamics Ltd.	15
Cerro Wire & Cable Co., Div. of Cerro Corp.	CM/E-15
Dynair Electronics, Inc.	32
Eastman Kodak Co.	CM/E-17
Eimac Division of Varian	26
Fort Worth Tower Co., Inc.	46
Garron Electronics, Inc.	42
Grass Valley Group, The	5
International Video Corp.	35, 36
Jerrold Electronics Corp.	CM/E-7
Koploy Company, L. M.	50
LPB Inc.	10, 11
McMartin Industries Inc.	40
Metron Instruments Inc.	40
Moseley Associates, Inc.	49
Oak Electro/Netics Corp., CATV Division	CM/E-13
Potomac Instruments, Inc.	42
RCA Service Company	25
Rank Precision Industries, Inc.	Cover 4
Scala Radio Corp.	CM/E-18
Shure Brothers, Inc.	39
Soladyne	52
Sony Corp. of America	Cover 2, 3
Sparta Electronic Corp.	Cov 41
Spindler & Sauppe	50
TAB Books	43, 44, 45
TeleMation	12, 13
Telemet, Division of Geotel	47
Theta-Corn	CM/E-9
Time & Frequency Technology Inc.	34
Wilkinson Electronics Corp.	17

SALES OFFICES

Broadband Information Services, Inc.
200 Madison Avenue
New York, New York 10016

Charles C. Lenz Jr., Advertising Director

EASTERN & MIDWESTERN STATES

200 Madison Avenue
New York, New York 10016
212-685-5320

Charles C. Lenz Jr.

WESTERN STATES

1111 Hearst Building
San Francisco, California 94130
415-362-8547

William J. Healey

16400 Ventura Blvd.
Encino, California 91316
213-981-4721

Art Mandell

JAPAN

Nippon Keisoku Inc.
P.O. Box 410
Central Tokyo, Japan
536-6614

Yoshi Yamamoto

ask about our new am | fm | tv monitors



Call or Write ARNO MEYER

BELAR ELECTRONICS LABORATORY, INC.

Delaware & Montrose Avenues, Upper Darby, Pa. 19084 Box 83

(215) 789-0550

Circle 127 on Reader Service Card

BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

STAGE WILL BE PAID BY



Broadband Information Services, Inc.

P.O. BOX 6058

Duluth, Minnesota 55806

FIRST CLASS

Permit No. 665
Duluth, Minnesota



BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

STAGE WILL BE PAID BY



Broadband Information Services, Inc.

P.O. BOX 6058

Duluth, Minnesota 55806

FIRST CLASS

Permit No. 665
Duluth, Minnesota



BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

STAGE WILL BE PAID BY



Broadband Information Services, Inc.

P.O. BOX 6056

Duluth, Minnesota 55806

www.americanradiohistory.com

FIRST CLASS

Permit No. 665
Duluth, Minnesota



You have to be tops to go to the Olympics*

Vidifont is the electronic character generator system that's tops in its field. It's the one system that can do all your titling instantaneously with the help of only one operator. The graphic qualities of news flashes and all messages are superior. Because Vidifont features proportional letter spacing, a choice of type fonts and sizes, upper and lower case characters, word-by-word color, push button centering, three-speed flashing, built-in edging, and roll and crawl. Little wonder that Vidifont was chosen to play a big

part in the world-wide telecast of the Olympics. With Vidifont on your side, your station could break a few records in the race for viewer ratings. To discuss your station's requirements, call (203) 327-2000 or write:

CBS LABORATORIES

A Division of Columbia Broadcasting System, Inc.
227 High Ridge Road, Stamford, Connecticut 06905

*Vidifont used in 1972 Winter Olympics, Sapporo, Japan

See Vidifont and more at NAB Booth 303



NEW FROM RANK FOR 72

Taylor Hobson's flarefree lens

VAROTAL 30 produces perfect pictures without a rayshade. The range extender operates from your panning handle holding perfect focus while you change from one shot to another.

With a 56° angle of view, minimum object distance is eighteen inches. For remote broadcasting you get the widest angle in the TV world.

There are seven different control systems to choose from and it gives you the ability to change from servo to manual, or vice versa in less than one minute off air time.

And that's not all. We want to show you that Varotal 30 achieves more than any other TV lens in existence.



VAROTAL 30
See it at NAB-Booth 317

RANK CINTEL

photoconductive telecine

CINTEL TELECINE is an entirely new approach to telecine for film chain use. It accommodates film reels up to 20" in diameter, film loops and slides. Modular construction permits simple extension from uniplex to multiplex format. It used Bauer 16 and 35 mm television projectors fitted with Cintel automatic lamp houses. And there is much more.

See it at NAB-Booth 317

or

Write for complete information and prices



RANK PRECISION INDUSTRIES, INC.

New York 260 N. Rt. 303 West Nyack, N.Y. 10994 (914) 358-4450
Illinois 411 Jarvis Ave. Des Plaines, Ill. 60018 (312) 297-7720
California 5926 E. Wash. Blvd., Los Angeles, Calif. 90040 (213) 685-8590

Circle 130 on Reader Service Card