


PASSIVE COMPONENTS

Leaded Ceramic Capacitors

1998

Data Handbook PA06b

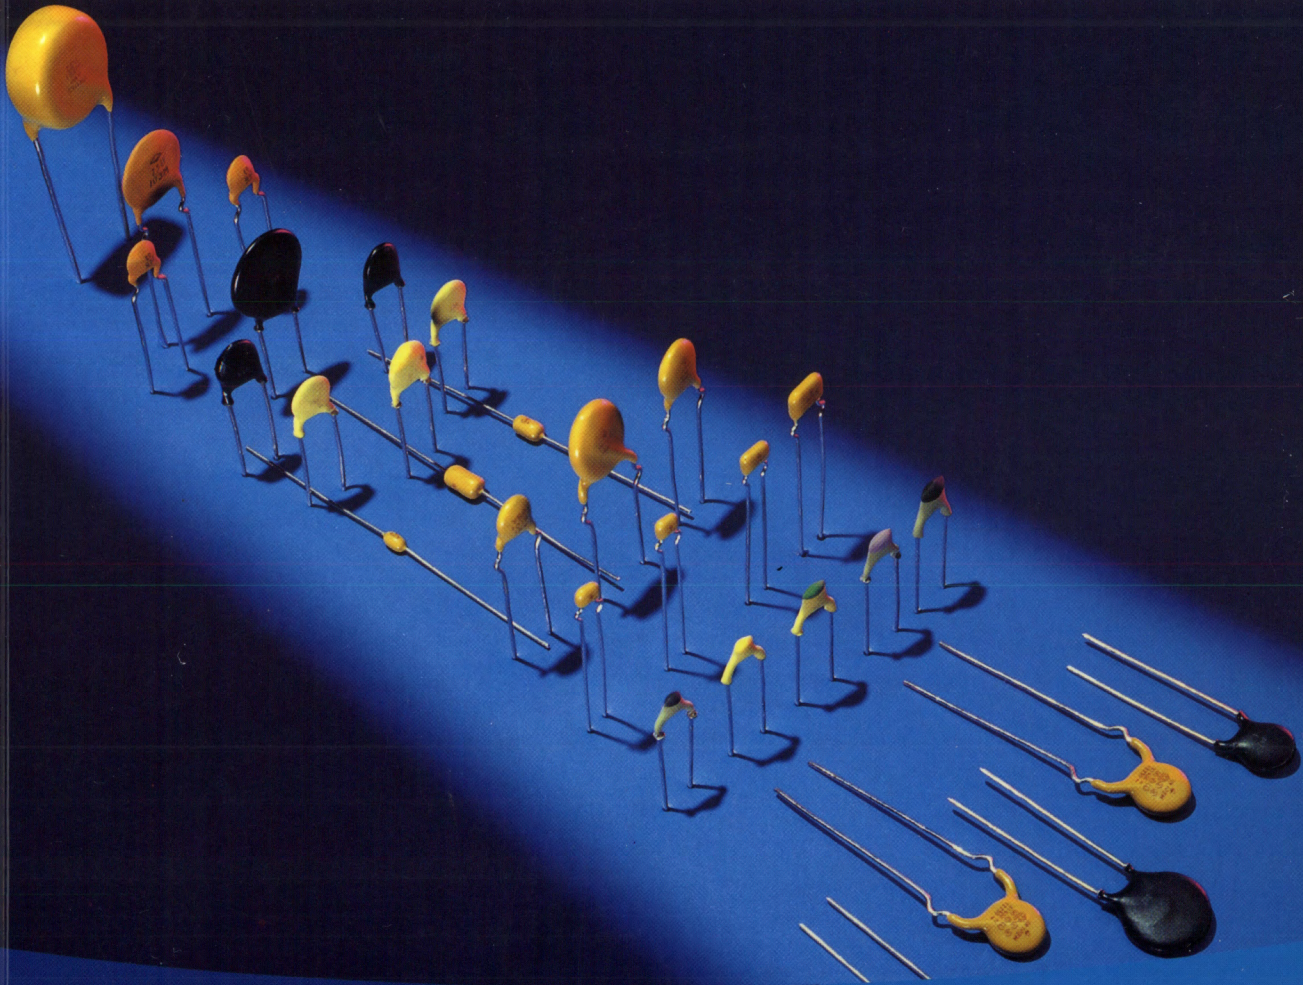

PHILIPS

Let's make things better.

QUALITY ASSURED

Our quality system focuses on the continuing high quality of our components and the best possible service for our customers. We have a three-sided quality strategy: we apply a system of total quality control and assurance; we operate customer-oriented dynamic improvement programmes; and we promote a partnering relationship with our customers and suppliers.

PRODUCT SAFETY

In striving for state-of-the-art perfection, we continuously improve components and processes with respect to environmental demands. Our components offer no hazard to the environment in normal use when operated or stored within the limits specified in the data sheet.

Some components unavoidably contain substances that, if exposed by accident or misuse, are potentially hazardous to health. Users of these components are informed of the danger by warning notices in the data sheets supporting the components. Where necessary the warning notices also indicate safety precautions to be taken and disposal instructions to be followed. Obviously users of these components, in general the set-making industry, assume responsibility towards the consumer with respect to safety matters and environmental demands.

All used or obsolete components should be disposed of according to the regulations applying at the disposal location. Depending on the location, electronic components are considered to be 'chemical', 'special' or sometimes 'industrial' waste. Disposal as domestic waste is usually not permitted.

Leaded Ceramic Capacitors

CONTENTS

	Page
INTRODUCTION	
General data	4
Construction	4
Manufacturing of ceramic capacitors	4
Equivalent circuit for ceramic capacitors	4
Tangent of the loss angle	5
CERAMIC DISC CAPACITORS	7
LEADED CERAMIC MULTILAYER CAPACITORS	77
MINIATURE CERAMIC PLATE CAPACITORS	143
DATA HANDBOOK SYSTEM	243
STANDARD VALUES (inside back cover)	

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

INTRODUCTION

Ceramic capacitors

Introduction

GENERAL DATA

Ceramic capacitors are widely used in electronic circuitry for coupling, decoupling and in filters. These different functions require specific capacitor properties.

Ceramic capacitors can be divided into two classes:

- Class 1

In these capacitors dielectric materials are used which have a very high specific resistance, very good Q and linear temperature dependence (ϵ_r from 6 up to 550). They are used in such applications as oscillators and filters where low losses, capacitance drift compensation and high stability are required.

- Class 2

These capacitors have higher losses and have non-linear characteristics ($\epsilon_r > 250$). They are used for coupling and decoupling.

CONSTRUCTION

The capacitance of a ceramic capacitor depends on the area of the electrodes (A), the thickness of the ceramic dielectric (t) and the dielectric constant of the ceramic material (ϵ_r); and on the number of dielectric layers (n) with multilayer ceramic capacitors:

$$C = \epsilon_r \times \epsilon_0 \times \frac{A}{t} \times n$$

The rated voltage is dependent on the dielectric strength, which is mainly governed by the thickness of the dielectric layer and the ceramic structure. For this reason a reduction of the layer thickness is limited.

MANUFACTURING OF CERAMIC CAPACITORS

The raw materials are finely milled and carefully mixed. Thereafter the powders are calcined at temperatures between 1100 and 1300 °C to achieve the required chemical composition. The resultant mass is reground and dopes and/or sintering means are added.

The finely ground material is mixed with a solvent and binding matter. Thin sheets are obtained by casting or rolling.

For plate capacitors these sheets are fired in a carefully controlled atmosphere at temperatures between 1200 and 1400 °C.

For multilayer capacitors electrode material is printed on the sheets and after stacking and pressing of the sheets cofired with the ceramic compact at temperatures between 1000 and 1400 °C.

The totally enclosed electrodes of a multilayer capacitor guarantee good life test behaviour as well.

EQUIVALENT CIRCUIT FOR CERAMIC CAPACITORS

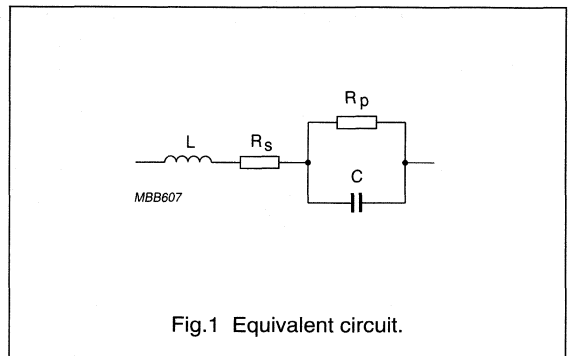


Fig.1 Equivalent circuit.

Definition of symbols; see Fig.1

SYMBOL	DESCRIPTION
C	Capacitance between the two electrodes, plus the stray capacitance at the edges and between the leads.
R _p	Resistance of insulation and dielectric. Generally R _p is very high, and of decreasing importance with increasing frequency. R _p also represents the polarization losses of the material in an alternating electric field.
R _s	Losses in the leads, the electrodes and the contacts. Up to several hundreds of MHz the current penetration depth is greater than the conductor thickness so that no skin-effect occurs. For ceramic capacitors R _s is extremely low.
L	Inductance of the leads and the internal inductance of the capacitor; the latter, however, is almost negligible. The inductance is only important in high frequency applications, since the capacitor will act as an inductance when the frequency is higher than its resonance frequency.

TANGENT OF THE LOSS ANGLE

The losses of a capacitor are expressed in terms of $\tan \delta$ which is the relationship between the resistive and reactive parts of the impedance, specified as follows:

$$\tan \delta = \frac{|R|}{|X|} = \frac{R_p + R_s \{1 + (\omega CR_p)^2\}}{(\omega CR_p)^2 - \omega L \{1 + (\omega CR_p)^2\}}$$

From this formula, $\tan \delta$ can be derived for different frequency ranges as shown in Fig.2.

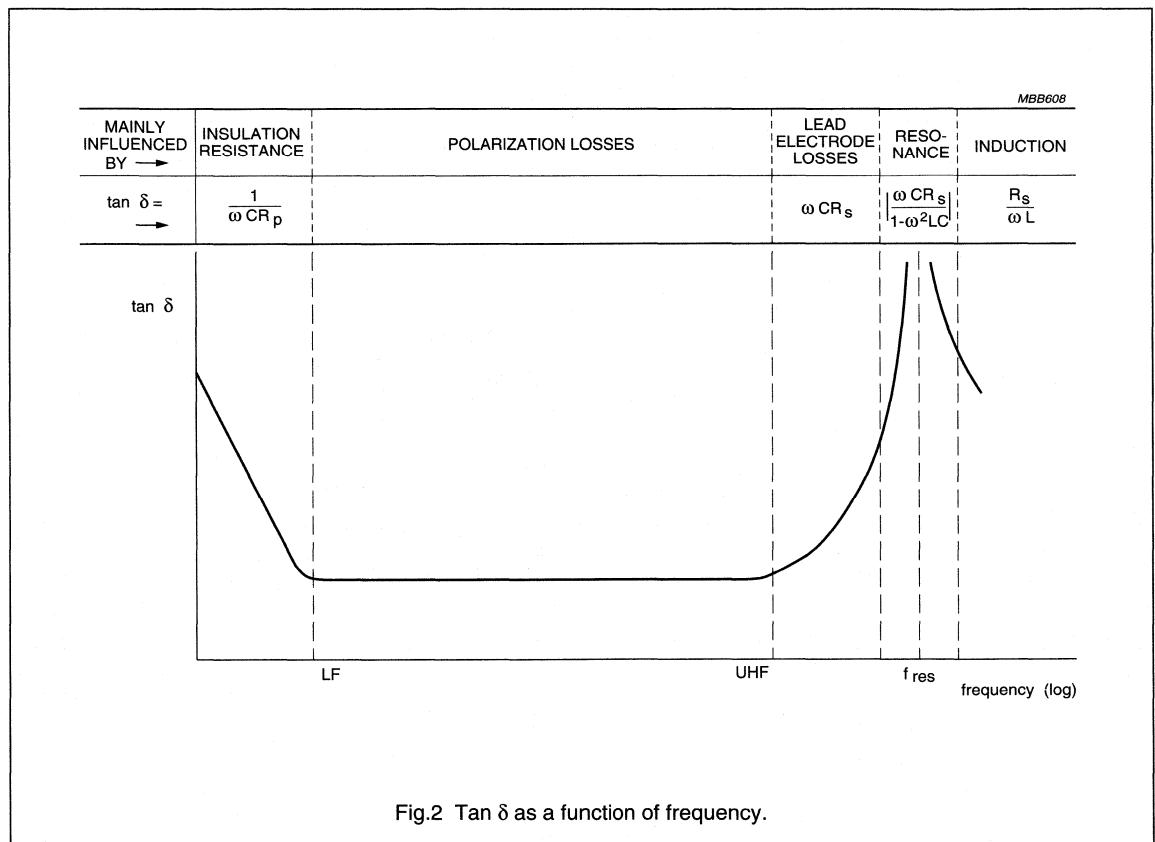


Fig.2 Tan δ as a function of frequency.


CERAMIC DISC CAPACITORS

	Page
CLEAR TEXT CODE	8
PACKAGING	9
PRODUCT DATA	
Class 1 and 2, 50 V (DC) general purpose	12
Class 1 and 2, 500 V (DC) general purpose	20
Class 1 and 2, 1/2/3/6 kV general purpose	28
Class 2, low loss (0.5% max.) 1 kV, 2 kV and 3 kV	46
Class 2, low loss (0.2% max.) 1 kV and 2 kV (flanged)	55
Class X1/Y2, 250 V (AC) safety (kinked or straight)	63
Class Y2, 250 V (AC) safety (flanged)	70

Ceramic disc capacitors

Clear text code

CLEAR TEXT ORDERING CODE

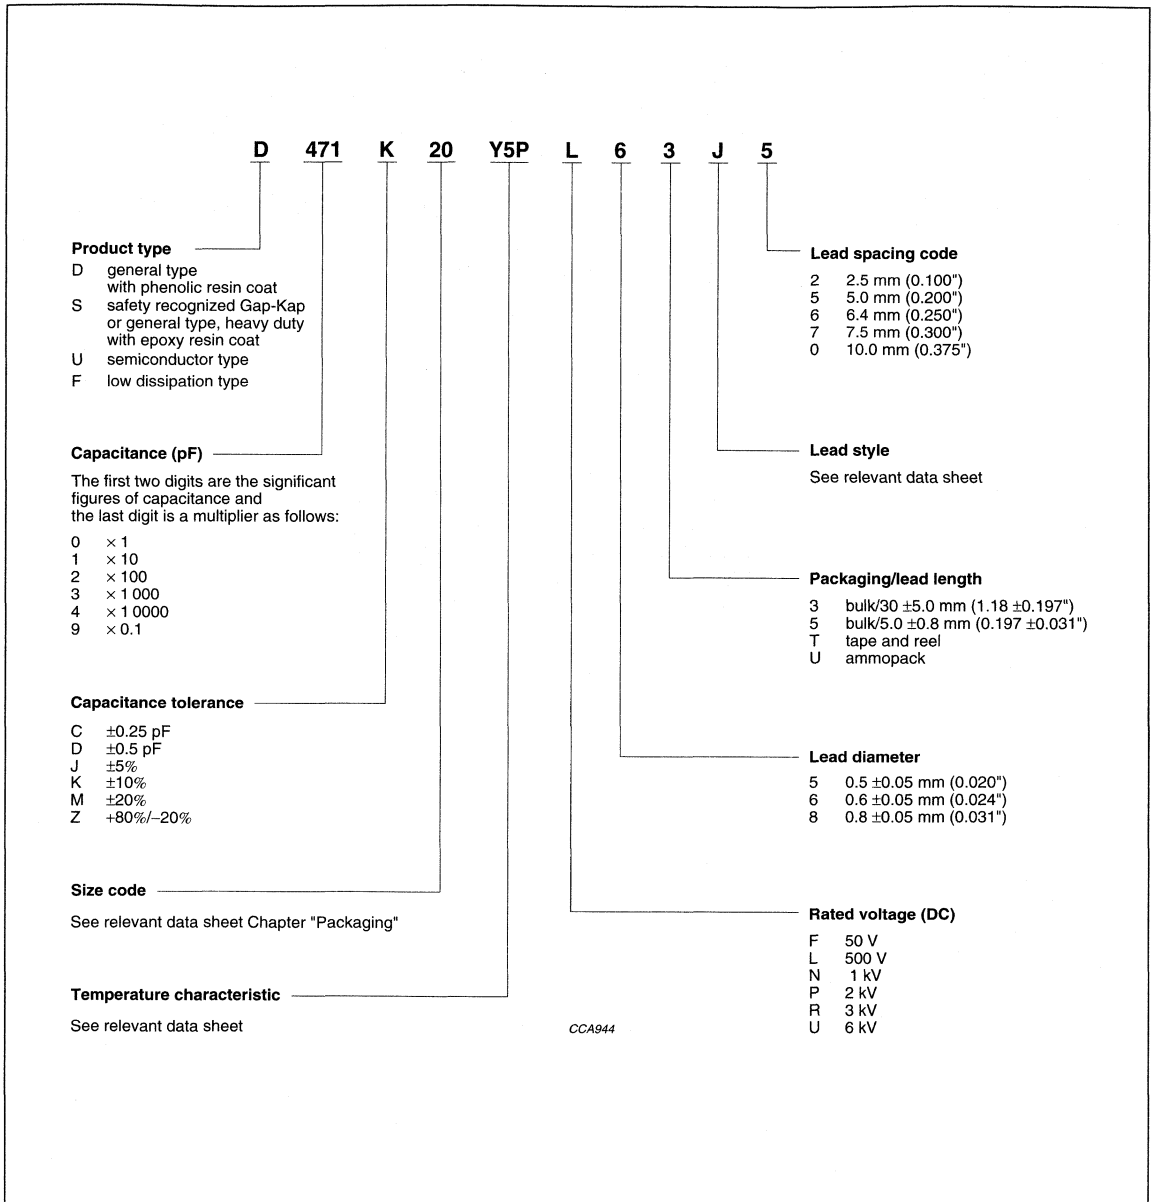

Ceramic disc capacitors

Packaging

SMALLEST PACKAGING QUANTITIES (SPQ)

PACKAGING	PRODUCT TYPE AND SIZE CODE		SPQ		BOX DIMENSIONS L × W × H (mm)	
			2252 SERIES FE 15-digit	2222 SERIES US 15-digit		
Bulk; note 1	disc; long lead; L > 25.4 mm	20 to 25	1 000		245 × 120 × 65	
		29 to 39	1 000			
		43 to 47	1 000			
		53 to 84	500			
		96	250			
	disc; short lead; L ≤ 10 mm	20 to 25	5 000		245 × 120 × 65	
		29 to 39	3 000			
		43 to 47	3 000			
		53 to 59	2 000			
		66 to 69	1 000			
		75 to 84	500			
		96	500			
	Tape on reel	disc	20 to 43; <500 V _{DC}	2 500	2 000 ⁽²⁾	370 × 370 × 60
			20 to 43; 500 V _{DC} ≤ WV ≤ 2 kV _{DC}	2 000	2 000	
Ammopack	disc	20 to 43; <500 V _{DC}	2 000	2 000	335 × 240 × 50	
		20 to 43; 500 V _{DC} ≤ WV ≤ 2 kV _{DC}	2 000	2 000	335 × 290 × 50	
		2 kV _{DC} only	1 500	1 500		

Notes

- SPQ contains 1 or a multiple of poly-bags, 1000 units per bag, except for the following:
 - Disc size 53 to 84, long lead and size 66 to 84, short lead: 500 units per bag.
 - Disc size 96: 250 units per bag.
- Non-standard SPQ for 2222 series and US 15-digit code (including FE 15-digit code with suffix XV) which will be phased out in the future.

PRODUCT DATA

Ceramic disc capacitors

Class 1 and 2, 50 V (DC) general purpose

FEATURES

- Low losses
- High stability
- High capacitance in small size
- Kinked (preferred) or straight leads.

APPLICATIONS

- Bypassing
- Coupling
- Resonant circuit.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm.

The capacitors have inward kinked leads with a spacing of 5 mm (0.200") and a lead length from 4 to 30 mm. Encapsulation is made of phenolic resin.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range: Class 1 Class 2	1.0 to 220 pF 330 to 47000 pF
Rated DC voltage	50 V
Dielectric strength	250% of rated voltage
Insulation resistance at 50 V (DC)	≥10000 MΩ
Tolerance on capacitance	±5%, ±10%, ±20%, -20%/+80%
Dissipation factor: Class 1, C ≤ 30 pF Class 1, C > 30 pF Class 2	≤20 × (10/C + 0.7) × 10 ⁻⁴ max. ≤20 × 10 ⁻⁴ ≤3.0%
Temperature coefficients	NP0, SL0, Y5P, Z5U, Z5V
Sectional specifications	IEC 384-8, IEC 384-9, EIA198
Climatic category: Class 1 Class 2	55/85/21 10/85/21


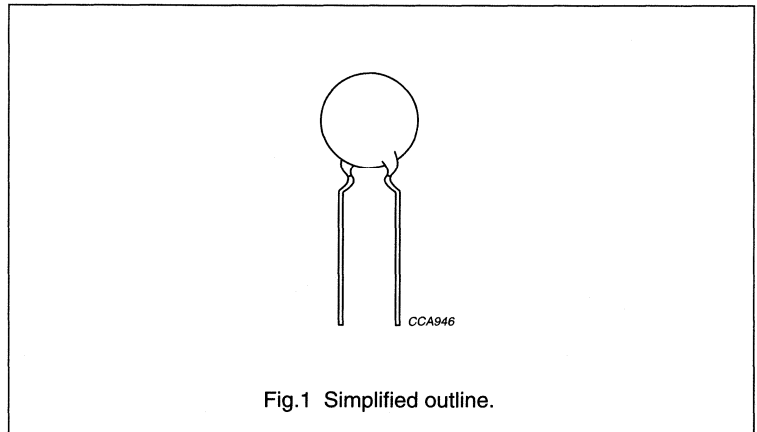


Fig.1 Simplified outline.

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose

MECHANICAL DATA



Dimensions in mm.
For dimensions see Tables 1 and 2.

Fig.2 Capacitors with 5 mm (0.20") lead spacing.

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA198".

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose

ORDERING INFORMATION (preferred types)

Table 1 Class 1, 50 V (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
Class 1 NP0									
1.0	±25 pF	5.0	5.0	3.2	D109C20C0KF6.J5	06	08	10	2252 505 ..044
1.5	±25 pF	5.0	5.0	3.2	D159C20C0KF6.J5	06	08	10	2252 505 ..144
2.2	±25 pF	5.0	5.0	3.2	D229C20C0JF6.J5	06	08	10	2252 505 ..244
3.3	±25 pF	5.0	5.0	3.2	D339C20C0JF6.J5	06	08	10	2252 505 ..344
4.7	±25 pF	5.0	5.0	3.2	D479C20C0HF6.J5	06	08	10	2252 505 ..444
6.8	±50 pF	5.0	5.0	3.2	D689D20C0HF6.J5	06	08	10	2252 505 ..645
10	±5	5.0	5.0	3.2	D100J20C0GF6.J5	06	08	10	2252 505 ..005
12	±5	5.0	5.0	3.2	D120J20C0GF6.J5	06	08	10	2252 505 ..055
15	±5	5.0	5.0	3.2	D150J20C0GF6.J5	06	08	10	2252 505 ..105
18	±5	5.0	5.0	3.2	D180J20C0GF6.J5	06	08	10	2252 505 ..155
22	±5	5.0	5.0	3.2	D220J20C0GF6.J5	06	08	10	2252 505 ..205
27	±5	5.0	5.0	3.2	D270J20C0GF6.J5	06	08	10	2252 505 ..255
33	±5	5.0	5.0	3.2	D330J20C0GF6.J5	06	08	10	2252 505 ..305
39	±5	5.0	5.0	3.2	D390J20C0GF6.J5	06	08	10	2252 505 ..355
47	±5	6.5	5.0	3.2	D470J25C0GF6.J5	06	08	10	2252 505 ..405
Class 1 SL0									
56	±5	5.0	5.0	3.2	D560J20SL0F6.J5	06	08	10	2252 565 ..505
68	±5	5.0	5.0	3.2	D680J20SL0F6.J5	06	08	10	2252 565 ..605
82	±5	5.0	5.0	3.2	D820J20SL0F6.J5	06	08	10	2252 565 ..805
100	±5	5.0	5.0	3.2	D101J20SL0F6.J5	06	08	10	2252 565 ..015
150	±5	6.5	5.0	3.2	D151J25SL0F6.J5	06	08	10	2252 565 ..115
180	±5	6.5	5.0	3.2	D181J25SL0F6.J5	06	08	10	2252 565 ..165
220	±5	6.5	5.0	3.2	D221J25SL0F6.J5	06	08	10	2252 565 ..215

Notes

1. Maximum thickness 4.0 mm.
2. SH = seated height.
3. Packaging codes refer to inward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose**Table 2 Class 2, 50 V (DC), kinked;** capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾	
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK		
Class 2 Y5P										
330	±10	5.0	5.0	3.2	D331K20Y5PF6.J5	06	08	10	2252 615 ..311	
470	±10	5.0	5.0	3.2	D471K20Y5PF6.J5	06	08	10	2252 615 ..411	
680	±10	5.0	5.0	3.2	D681K20Y5PF6.J5	06	08	10	2252 615 ..611	
1000	±10	5.0	5.0	3.2	D102K20Y5PF6.J5	06	08	10	2252 615 ..021	
1500	±10	5.0	5.0	3.2	D152K20Y5PF6.J5	06	08	10	2252 615 ..121	
1800	±10	5.0	5.0	3.2	D182K20Y5PF6.J5	06	08	10	2252 615 ..171	
2200	+10	6.5	5.0	3.2	D222K25Y5PF6.J5	06	08	10	2252 615 ..221	
3300	±10	6.5	5.0	3.2	D332K25Y5PF6.J5	06	08	10	2252 615 ..321	
4700	±10	7.5	5.0	3.2	D472K29Y5PF6.J5	06	08	10	2252 615 ..421	
6800	±10	8.5	5.0	3.2	D682K33Y5PF6.J5	06	08	10	2252 615 ..621	
10000	±10	10.0	5.0	3.2	D103K39Y5PF6.J5	06	08	10	2252 615 ..031	
Class 2 Z5U										
1000	±20	5.0	5.0	3.2	D102M20Z5UF6.J5	06	08	10	2252 645 ..022	
1500	±20	5.0	5.0	3.2	D152M20Z5UF6.J5	06	08	10	2252 645 ..122	
2200	±20	5.0	5.0	3.2	D222M20Z5UF6.J5	06	08	10	2252 645 ..222	
3300	±20	5.0	5.0	3.2	D332M20Z5UF6.J5	06	08	10	2252 645 ..322	
4700	±20	6.5	5.0	3.2	D472M25Z5UF6.J5	06	08	10	2252 645 ..422	
6800	±20	6.5	5.0	3.2	D682M25Z5UF6.J5	06	08	10	2252 645 ..622	
10000	±20	7.5	5.0	3.2	D103M29Z5UF6.J5	06	08	10	2252 645 ..032	
15000	±20	8.5	5.0	3.2	D153M33Z5UF6.J5	06	08	10	2252 645 ..132	
22000	±20	10.0	5.0	3.2	D223M39Z5UF6.J5	06	08	10	2252 645 ..232	
Class 2 Z5V										
4700	+80/-20	5.0	5.0	3.2	D472Z20Z5VF6.J5	06	08	10	2252 655 ..423	
10000	+80/-20	6.5	5.0	3.2	D103Z25Z5VF6.J5	06	08	10	2252 655 ..033	
22000	+80/-20	7.5	5.0	3.2	D223Z29Z5VF6.J5	06	08	10	2252 655 ..233	
47000	+80/-20	10.0	5.0	3.2	D473Z39Z5VF6.J5	06	08	10	2252 655 ..433	

Notes

1. Maximum thickness 4.0 mm.
2. SH = seated height.
3. Packaging codes refer to inward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE
Capacitance range: Class 1, at 1 MHz, 1.2 V (RMS); note 1 Class 2, at 1 kHz, 1 ± 0.2 V (RMS)	1.0 to 220 pF 330 to 47 000 pF
Tolerance on capacitance	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$, $+80\%/-20\%$
Dielectric strength	250% of rated voltage
Insulation resistance at 50 V (DC)	≥ 10000 M Ω
Temperature coefficients on capacitance: Class 1 Class 2	NPO, SLO Y5P, Z5U, Z5V
Dissipation factor: Class 1, $C \leq 30$ pF Class 1, $C > 30$ pF Class 2	$\leq 20 \times (10/C + 0.7) \times 10^{-4}$ max. $\leq 20 \times 10^{-4}$ $\leq 3.0\%$
Operating temperature range	-30 to +85 °C

Note

- 1 kHz, 1 ± 0.2 V (RMS) for capacitance values higher than 1000 pF.

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 3).

Table 3 Size codes and packaging quantities

D _{max} (mm)	SIZE CODE	PACKAGING QUANTITIES		
		BULK	REEL	AMMO
5.0 (0.20")	20	1000	2500	2000
6.5 (0.25")	25			
7.5 (0.29")	29			
8.5 (0.33")	33			
10.0 (0.39")	39			
11.0 (0.43")	43			

Kinked capacitors on tape, lead spacing 5.0 mm (0.2 inch)

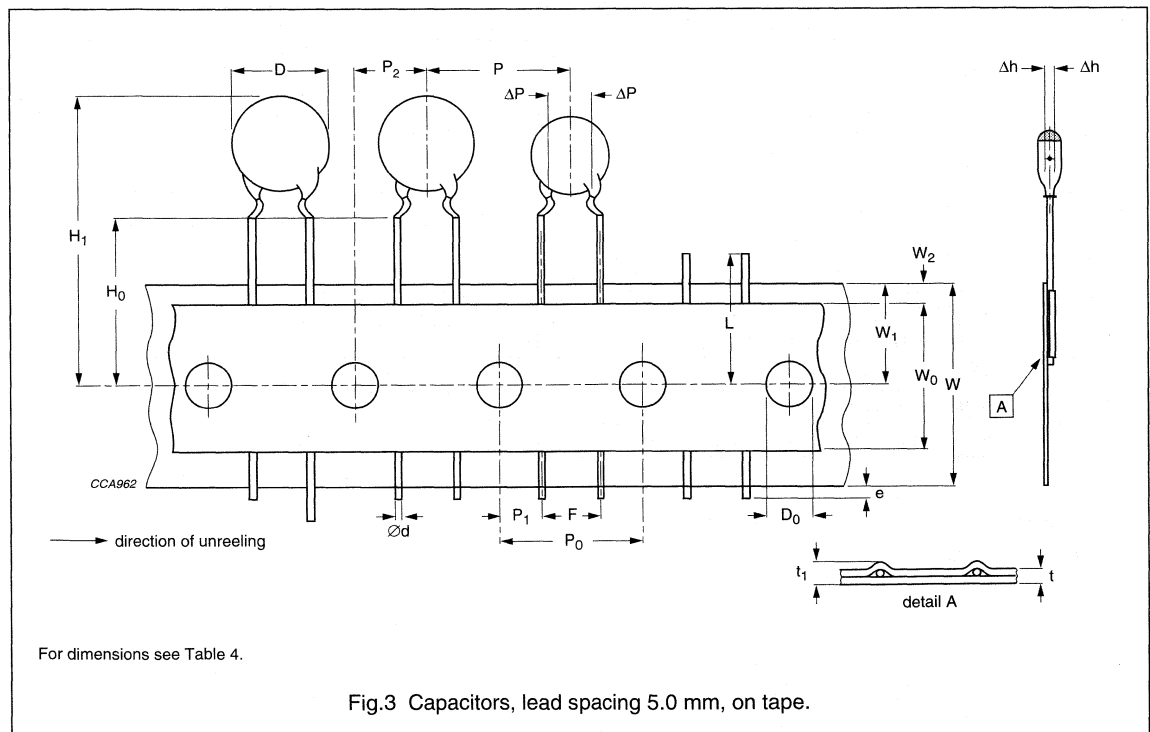

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose**Table 4** Dimensions of tape; see Fig.3

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
D	body diameter	11.0 max.	–
d	lead diameter	0.6	±0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.3; note 1
ΔP	plane deviation	1.0 max.	–
P ₁	feed-hole centre to lead centre	3.85	±0.7; note 2
P ₂	feed-hole centre to component centre	6.35	±1.3; note 2
F	lead spacing	5.0	+0.6 –0.4
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±1.0
W	tape width	18.0	+1.0 –0.5
W ₀	hold-down tape width	5.0 min.	–
W ₁	hole position	9.0	+0.75 –0.5
W ₂	hold-down tape margin	3.0 max.	–
H ₀	height to seating plane	16.0	±0.5
H ₁	maximum component height	32.0	–
e	lead end protrusion	1.0 max.	–
L	maximum length of snipped lead	11.0	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.9 max.	–
t ₁	maximum thickness of tape and wires	1.5 max.	–



Notes

1. Cumulative pitch error: $\pm \leq 1$ mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors

Class 1 and 2, 50 V (DC)
general purpose

REEL AND TAPE DATA

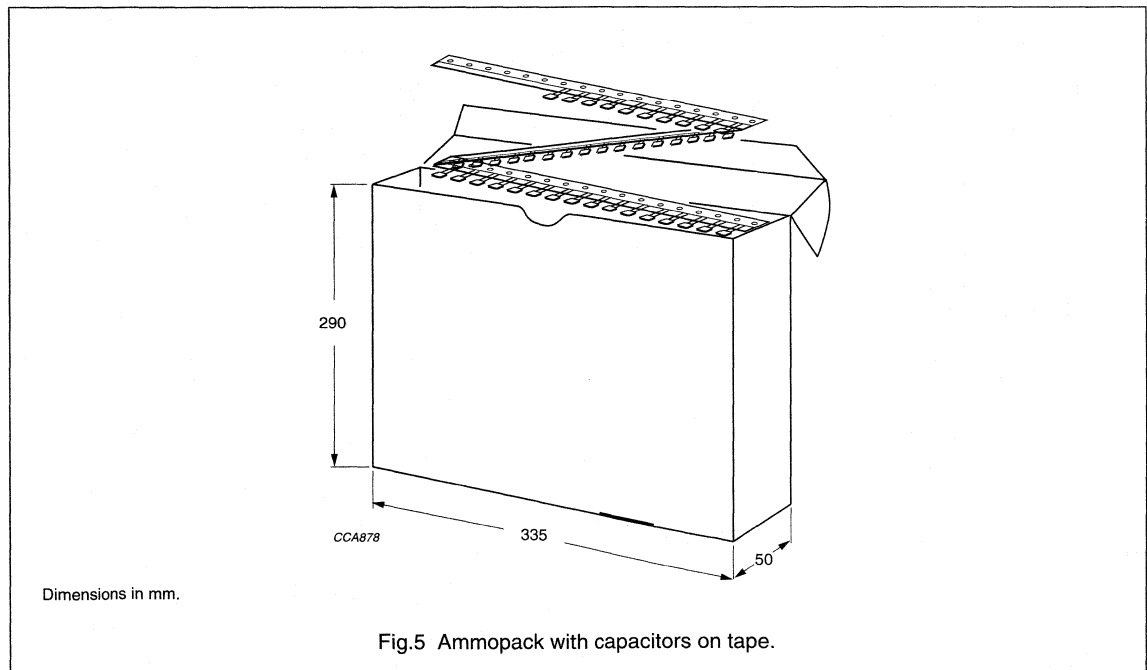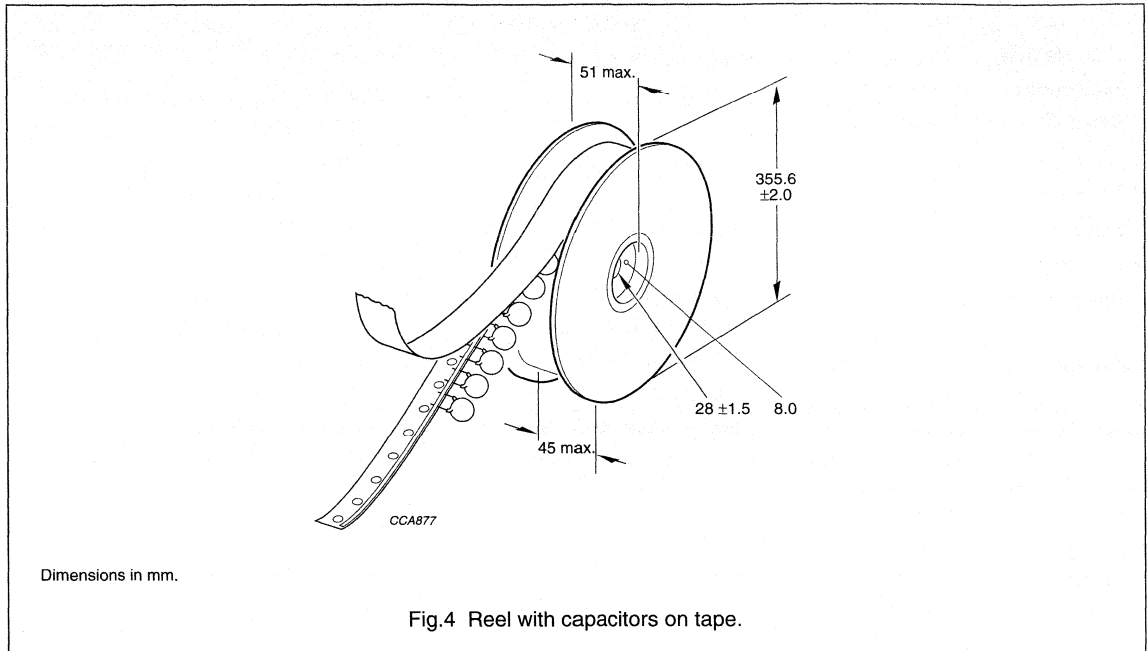

Ceramic disc capacitors

Class 1 and 2, 500 V (DC) general purpose

FEATURES

- Low losses
- High stability
- High capacitance in small size
- Kinked (preferred) or straight leads.

APPLICATIONS

- Bypassing
- Coupling
- Resonant circuit.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm.

The capacitors have inward kinked leads with a spacing of 5 mm (0.200") or 7.5 mm (0.300") and a lead length from 4 to 30 mm. Encapsulation is made of phenolic resin.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range:	
Class 1	10 to 82 pF
Class 2	100 to 22000 pF
Rated DC voltage	500 V
Dielectric strength	250% of rated voltage
Insulation resistance at 500 V (DC)	≥10000 MΩ
Tolerance on capacitance	±5%, ±10%, ±20%
Dissipation factor:	
Class 1, C ≤ 30 pF	≤20 × (10/C + 0.7) × 10 ⁻⁴ max.
Class 1, C > 30 pF	≤20 × 10 ⁻⁴
Class 2	≤3.0%
Temperature coefficients	NP0, SL0, Y5P, Z5U
Sectional specifications	IEC 384-8, IEC 384-9, EIA198
Climatic category:	
Class 1	55/85/21
Class 2	10/85/21


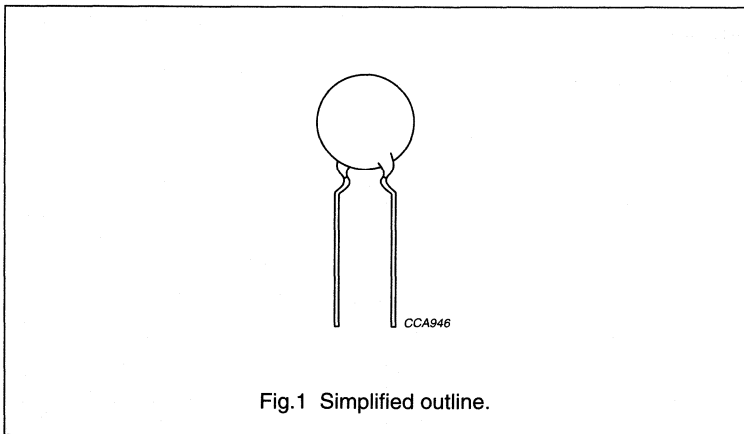


Fig.1 Simplified outline.

Ceramic disc capacitors


Class 1 and 2, 500 V (DC)
general purpose

MECHANICAL DATA



Dimensions in mm.
For dimensions see Tables 1 and 2.

Fig.2 Capacitors with 5 mm (0.20") lead spacing.



Dimensions in mm.
For dimensions see Tables 1 and 2.

Fig.3 Capacitors with 7.5 mm (0.30") lead spacing.

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA198".

Ceramic disc capacitors

Class 1 and 2, 500 V (DC)
general purpose

ORDERING INFORMATION (preferred types)

Table 1 Class 1, 500 V (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
Class 1 NPO									
10	±5	5.0	5.0	3.2	D100J20C0GL6.J5	06	08	10	2252 508 ..005
12	±5	5.0	5.0	3.2	D120J20C0GL6.J5	06	08	10	2252 508 ..055
15	±5	5.0	5.0	3.2	D150J20C0GL6.J5	06	08	10	2252 508 ..105
18	±5	6.5	5.0	3.2	D180J25C0GL6.J5	06	08	10	2252 508 ..155
22	±5	6.5	5.0	3.2	D220J25C0GL6.J5	06	08	10	2252 508 ..205
27	±5	6.5	5.0	3.2	D270J25C0GL6.J5	06	08	10	2252 508 ..255
Class 1 SLO									
33	±5	5.0	5.0	3.2	D330J20SLOL6.J5	06	08	10	2252 568 ..305
39	±5	5.0	5.0	3.2	D390J20SLOL6.J5	06	08	10	2252 568 ..355
47	±5	5.0	5.0	3.2	D470J20SLOL6.J5	06	08	10	2252 568 ..405
56	±5	6.5	5.0	3.2	D560J25SLOL6.J5	06	08	10	2252 568 ..505
68	±5	6.5	5.0	3.2	D680J25SLOL6.J5	06	08	10	2252 568 ..605
82	±5	6.5	5.0	3.2	D820J25SLOL6.J5	06	08	10	2252 568 ..805

Notes

1. Maximum thickness 4.0 mm.
2. SH = seated height.
3. Packaging codes refer to inward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 500 V (DC)
general purpose**Table 2 Class 2, 500 V (DC), kinked;** capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
Class 2 Y5P									
100	±10	5.0	5.0	3.2	D101K20Y5PL6.J5	06	08	10	2252 618 ..011
150	±10	5.0	5.0	3.2	D151K20Y5PL6.J5	06	08	10	2252 618 ..111
220	±10	5.0	5.0	3.2	D221K20Y5PL6.J5	06	08	10	2252 618 ..211
330	±10	5.0	5.0	3.2	D331K20Y5PL6.J5	06	08	10	2252 618 ..311
470	±10	5.0	5.0	3.2	D471K20Y5PL6.J5	06	08	10	2252 618 ..411
680	±10	6.5	5.0	3.2	D681K25Y5PL6.J5	06	08	10	2252 618 ..611
1000	±10	6.5	5.0	3.2	D102K25Y5PL6.J5	06	08	10	2252 618 ..021
1500	±10	7.5	5.0	3.2	D152K29Y5PL6.J5	06	08	10	2252 618 ..121
2200	±10	8.5	5.0	3.2	D222K33Y5PL6.J5	06	08	10	2252 618 ..221
3300	±10	10.0	5.0	3.2	D332K39Y5PL6.J5	06	08	10	2252 618 ..321
4700	±10	12.0	7.5	4.0	D472K47Y5PL63J7	–	–	31	2252 618 ..421
6800	±10	13.5	7.5	4.0	D682K53Y5PL63J7	–	–	31	2252 618 ..621
10000	±10	17.5	7.5	4.0	D103K89Y5PL63J7	–	–	31	2252 618 ..031
Class 2 Z5U									
1000	±20	5.0	5.0	3.2	D102M20Z5UL6.J5	06	08	10	2252 648 ..022
1500	±20	6.5	5.0	3.2	D152M25Z5UL6.J5	06	08	10	2252 648 ..122
2200	±20	6.5	5.0	3.2	D222M25Z5UL6.J5	06	08	10	2252 648 ..222
3300	±20	7.5	5.0	3.2	D332M29Z5UL6.J5	06	08	10	2252 648 ..322
4700	±20	8.5	5.0	3.2	D472M33Z5UL6.J5	06	08	10	2252 648 ..422
6800	±20	10.0	5.0	3.2	D682M39Z5UL6.J5	06	08	10	2252 648 ..622
10000	±20	12.0	7.5	4.0	D103M47Z5UL6.J7	–	–	31	2252 648 ..032
15000	±20	13.5	7.5	4.0	D153M53Z5UL6.J7	–	–	31	2252 648 ..132
22000	±20	15.0	7.5	4.0	D223M59Z5UL6.J7	–	–	31	2252 648 ..232

Notes

1. Maximum thickness 4.0 mm.
2. SH = seated height.
3. Packaging codes refer to inward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 500 V (DC)
general purpose**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE
Capacitance range: Class 1, at 1 MHz, 1.2 V (RMS); note 1 Class 2, at 1 kHz, 1 ± 0.2 V (RMS)	10 to 82 pF 100 to 22000 pF
Tolerance on capacitance	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$
Dielectric strength	250% of rated voltage
Insulation resistance at 500 V (DC)	≥ 10000 M Ω
Temperature coefficients on capacitance: Class 1 Class 2	NP0, SL0 Y5P, Z5U
Dissipation factor: Class 1, $C \leq 30$ pF Class 1, $C > 30$ pF Class 2	$\leq 20 \times (10/C + 0.7) \times 10^{-4}$ max. $\leq 20 \times 10^{-4}$ $\leq 3.0\%$
Operating temperature range	-30 to +85 °C

Note

- 1 kHz, 1 ± 0.2 V (RMS) for capacitance values higher than 1000 pF.

Ceramic disc capacitors

Class 1 and 2, 500 V (DC) general purpose


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 3).

Table 3 Size codes and packaging quantities

D _{max} (mm)	SIZE CODE	PACKAGING QUANTITIES		
		BULK	REEL	AMMO
5.0 (0.20")	20	1000	2000	2000
6.5 (0.25")	25			
7.5 (0.29")	29			
8.5 (0.33")	33			
10.0 (0.39")	39			
11.0 (0.43")	43	1000	-	-
12.0 (0.47")	47			
13.5 (0.53")	53	500	-	-
15.0 (0.59")	59			
17.5 (0.69")	69			

Kinked capacitors on tape, lead spacing 5.0 mm (0.2 inch)

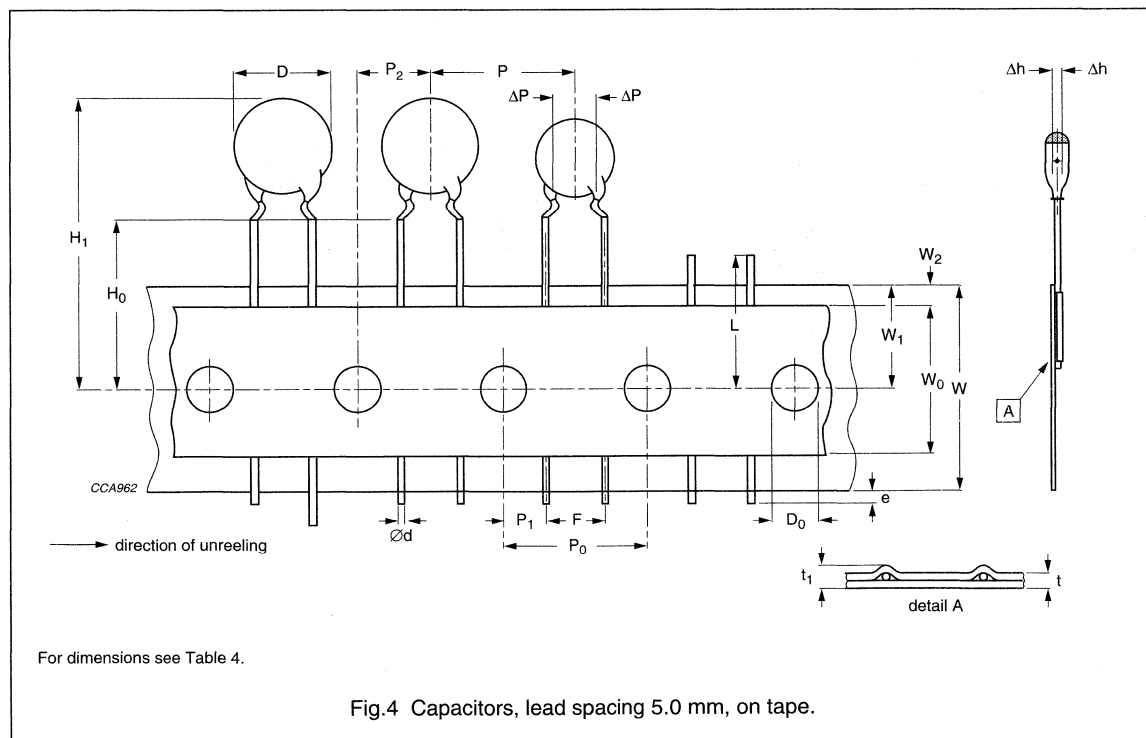

Ceramic disc capacitors

Class 1 and 2, 500 V (DC)
general purpose

Table 4 Dimensions of tape; see Fig.4

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
D	body diameter	11.0 max.	–
d	lead diameter	0.6	±0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.3; note 1
ΔP	plane deviation	1.0 max.	–
P ₁	feed-hole centre to lead centre	3.85	±0.7; note 2
P ₂	feed-hole centre to component centre	6.35	±1.3; note 2
F	lead spacing	5.0	+0.6 –0.4
F ₀	lead-to-lead	5.08	+0.5 –0.1
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±1.0
W	tape width	18.0	+1.0 –0.5
W ₀	hold-down tape width	5.0 min.	–
W ₁	hole position	9.0	+0.75 –0.5
W ₂	hold-down tape margin	3.0 max.	–
H ₀	height to seating plane	16.0	±0.5
H ₁	maximum component height	32.0	–
e	lead end protrusion	1.0 max.	–
L	maximum length of snapped lead	11.0	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.9 max.	–
t ₁	maximum thickness of tape and wires	1.5 max.	–


Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors


Class 1 and 2, 500 V (DC)
general purpose

REEL AND TAPE DATA

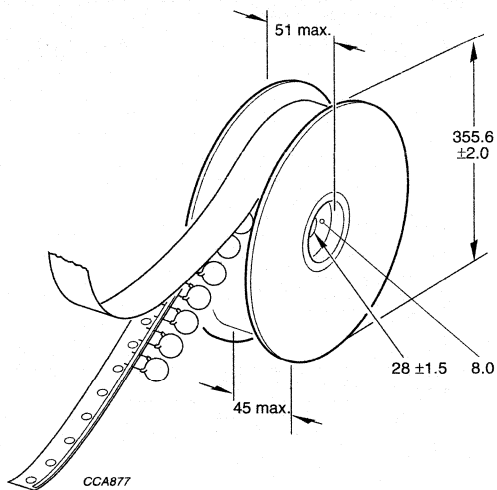

Dimensions in mm.

Fig.5 Reel with capacitors on tape.

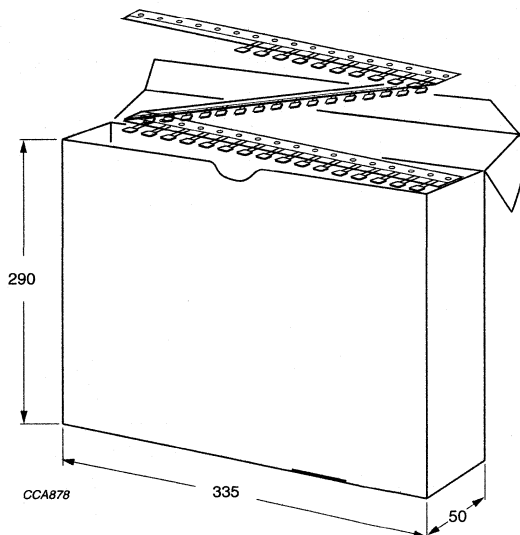

Dimensions in mm.

Fig.6 Ammpack with capacitors on tape.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV general purpose

FEATURES

- Low losses
- High stability
- High capacitance in small size
- Kinked (preferred), flanged or straight leads.

APPLICATIONS

- DC high voltage
- Pulse high voltage
- SMPS
- HV power supply
- HF ballast.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm or 0.8 mm up to 3 kV and 0.8 mm for 6 kV.

The capacitors may be supplied with outward kinked, flanged or straight leads with a lead spacing of 5 mm (0.200"), 7.5 mm (0.300") or 10 mm (0.400") and a lead length from 4 to 30 mm. The standard tolerance on capacitance is $\pm 5\%$ or $\pm 10\%$ for class 1 capacitors and $\pm 10\%$ or $\pm 20\%$ for class 2 capacitors. Encapsulation is made of gold-coloured epoxy-resin, flammable resistant in accordance with "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range:	
Class 1	10 to 270 pF
Class 2	100 to 22000 pF
Rated DC voltage	1 kV; 2 kV; 3 kV; 6 kV
Dielectric strength	200% of rated voltage
Insulation resistance at 500 V (DC)	$\geq 10000 \text{ M}\Omega$
Tolerance on capacitance	$\pm 5\%$, $\pm 10\%$ and $\pm 20\%$; note 1
Dissipation factor:	
Class 1, $C \leq 30 \text{ pF}$	$\leq 20 \times (10/C + 0.7) \times 10^{-4} \text{ max.}$
Class 1, $C > 30 \text{ pF}$	$\leq 20 \times 10^{-4}$
Class 2	$\leq 3.0\%$
Temperature coefficients	SL, S3N, Y5P, Z5U
Sectional specifications	IEC 384-8, IEC 384-9, EIA198
Climatic category:	
Class 1	55/85/21
Class 2	10/85/21

Note

1. Other tolerances available on request.



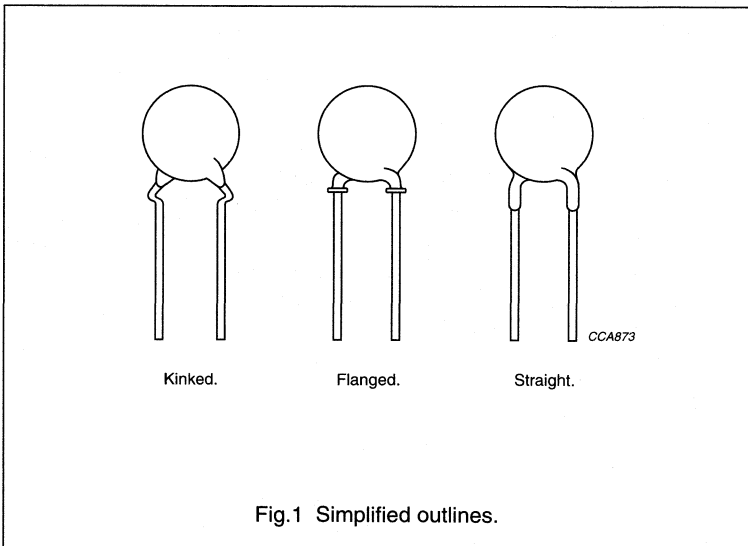


Fig.1 Simplified outlines.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

MECHANICAL DATA

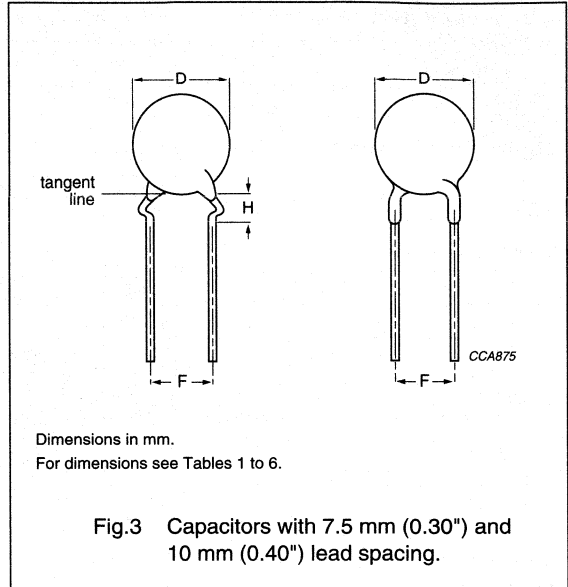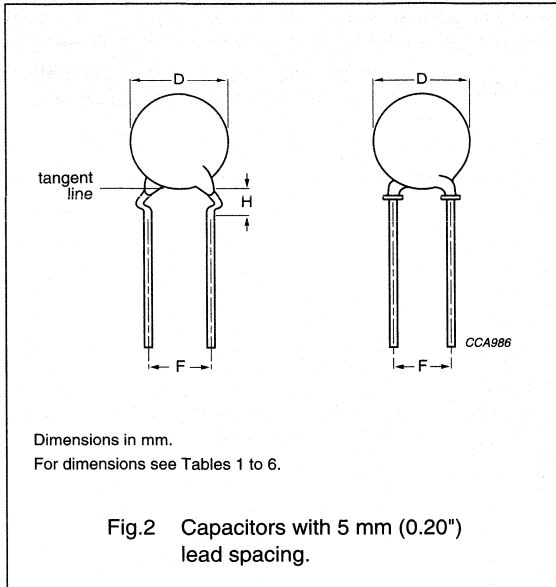

MARKING

Flanged capacitors are marked as follows:

- The body of the capacitors is tan coloured; capacitance value and voltage are indicated by a marking code on the body.
- SL capacitors do not have the temperature coefficient indication on the body.
- The temperature dependency is indicated by a yellow or a blue coloured cap, respectively for Y5P and Z5U dielectrics.

Straight and kinked leaded versions are gold coloured.
Marking indicates capacitance value and tolerance in accordance with "EIA 198", and voltage.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

ORDERING INFORMATION

Table 1 1 kV (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			KINKED			REEL	AMMO	BULK	KINKED
Class 1 SL0									
10	±10	6.5	5.0	3.2	S100K25SL0N6.K5	13	14	15	2252 561 ..006
15	±10	6.5	5.0	3.2	S150K25SL0N6.K5	13	14	15	2252 561 ..106
22	±10	6.5	5.0	3.2	S220K25SL0N6.K5	13	14	15	2252 561 ..206
33	±10	6.5	5.0	3.2	S330K25SL0N6.K5	13	14	15	2252 561 ..306
47	±10	6.5	5.0	3.2	S470K25SL0N6.K5	13	14	15	2252 561 ..406
68	±10	6.5	5.0	3.2	S680K25SL0N6.K5	13	14	15	2252 561 ..606
100	±10	7.5	5.0	3.2	S101K29SL0N6.K5	13	14	15	2252 561 ..016
150	±10	10.0	5.0	3.2	S151K39SL0N6.K5	13	14	15	2252 561 ..116
220	±10	10.0	5.0	3.2	S221K39SL0N6.K5	13	14	15	2252 561 ..216
Class 2 Y5P									
100	±10	6.5	5.0	3.2	S101K25Y5PN6.K5	13	14	15	2252 611 ..016
150	±10	6.5	5.0	3.2	S151K25Y5PN6.K5	13	14	15	2252 611 ..116
220	±10	6.5	5.0	3.2	S221K25Y5PN6.K5	13	14	15	2252 611 ..216
330	±10	6.5	5.0	3.2	S331K25Y5PN6.K5	13	14	15	2252 611 ..316
470	±10	6.5	5.0	3.2	S471K25Y5PN6.K5	13	14	15	2252 611 ..416
680	±10	6.5	5.0	3.2	S681K25Y5PN6.K5	13	14	15	2252 611 ..616
1000	±10	7.5	5.0	3.2	S102K29Y5PN6.K5	13	14	15	2252 611 ..026
1500	±10	8.5	5.0	3.2	S152K33Y5PN6.K5	13	14	15	2252 611 ..126
2200	±10	10.0	5.0	3.2	S222K39Y5PN6.K5	13	14	15	2252 611 ..226
3300	±10	11.0	5.0	3.2	S332K43Y5PN6.K5	13	14	15	2252 611 ..326
4700	±10	12.0	7.5	4.0	S472K47Y5PN63K7	–	–	37	2252 611 37426
6800	±10	15.0	7.5	4.0	S682K59Y5PN63K7	–	–	37	2252 611 37626
10000	±10	17.5	7.5	4.0	S103K69Y5PN63K7	–	–	37	2252 611 37036

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			KINKED			13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK
Class 2 Z5U									
1000	±20	6.5	5.0	3.2	S102M25Z5UN6.K5	13	14	15	2252 641 ..027
1500	±20	6.5	5.0	3.2	S152M25Z5UN6.K5	13	14	15	2252 641 ..127
2200	±20	7.5	5.0	3.2	S222M29Z5UN6.K5	13	14	15	2252 641 ..227
3300	±20	7.5	5.0	3.2	S332M29Z5UN6.K5	13	14	15	2252 641 ..327
4700	±20	10.0	5.0	3.2	S472M39Z5UN6.K5	13	14	15	2252 641 ..427
6800	±20	10.0	5.0	3.2	S682M39Z5UN6.K5	13	14	15	2252 641 ..627
10000	±20	12.0	7.5	4.0	S103M47Z5UN63K7	–	–	37	2252 641 37037
15000	±20	15.0	7.5	4.0	S153M59Z5UN63K7	–	–	37	2252 641 37137
22000	±20	17.5	7.5	4.0	S223M69Z5UN63K7	–	–	37	2252 641 37237

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. Packaging codes refer to outward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 2 1 kV (DC), flanged;** capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE 12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			FLANGED			REEL	AMMO	BULK	FLANGED
Class 1 SL0									
10	±5	7	5.0	10	D100J28SL0N..AP	13	14	15	2251 561 ..005
12	±5	7	5.0	10	D120J28SL0N..AP	13	14	15	2251 561 ..055
15	±5	7	5.0	10	D150J28SL0N..AP	13	14	15	2251 561 ..105
18	±5	7	5.0	10	D180J28SL0N..AP	13	14	15	2251 561 ..155
22	±5	7	5.0	10	D220J28SL0N..AP	13	14	15	2251 561 ..205
27	±5	7	5.0	10	D270J28SL0N..AP	13	14	15	2251 561 ..255
33	±5	7	5.0	10	D330J28SL0N..AP	13	14	15	2251 561 ..305
39	±5	7	5.0	10	D390J28SL0N..AP	13	14	15	2251 561 ..355
47	±5	7	5.0	10	D470J28SL0N..AP	13	14	15	2251 561 ..405
56	±5	7	5.0	10	D560J28SL0N..AP	13	14	15	2251 561 ..505
68	±5	8	5.0	11	D680J31SL0N..AP	13	14	15	2251 561 ..605
82	±5	8	5.0	11	D820J31SL0N..AP	13	14	15	2251 561 ..805
100	±5	8	5.0	11	D101J31SL0N..AP	13	14	15	2251 561 ..015
120	±5	10	5.0	12	D121J35SL0N..AP	13	14	15	2251 561 ..065
150	±5	10	5.0	13	D151J39SL0N..AP	13	14	15	2251 561 ..115
180	±5	10	5.0	13	D181J39SL0N..AP	13	14	15	2251 561 ..165
220	±5	10	5.0	13	D221J39SL0N..AP	13	14	15	2251 561 ..215
270	±5	12	5.0	15	D271J47SL0N..AP	13	14	15	2251 561 ..265
330	±5	12	5.0	15	D331J47SL0N..AP	13	14	15	2251 561 ..315
Class 2 Y5P									
100	±10	7	5.0	10	D101K28Y5PN..SP	13	14	15	2251 611 ..016
120	±10	7	5.0	10	D121K28Y5PN..SP	13	14	15	2251 611 ..066
150	±10	7	5.0	10	D151K28Y5PN..SP	13	14	15	2251 611 ..116
180	±10	7	5.0	10	D181K28Y5PN..SP	13	14	15	2251 611 ..166
220	±10	7	5.0	10	D221K28Y5PN..SP	13	14	15	2251 611 ..216
270	±10	7	5.0	10	D271K28Y5PN..SP	13	14	15	2251 611 ..266
330	±10	7	5.0	10	D331K28Y5PN..SP	13	14	15	2251 611 ..316
390	±10	7	5.0	10	D391K28Y5PN..SP	13	14	15	2251 611 ..366
470	±10	7	5.0	10	D471K28Y5PN..SP	13	14	15	2251 611 ..416
560	±10	7	5.0	10	D561K28Y5PN..SP	13	14	15	2251 611 ..516
680	±10	8	5.0	11	D681K31Y5PN..SP	13	14	15	2251 611 ..616
820	±10	8	5.0	11	D821K31Y5PN..SP	13	14	15	2251 611 ..816
1000	±10	8	5.0	11	D102K31Y5PN..SP	13	14	15	2251 611 ..026
1200	±10	9	5.0	12	D122K35Y5PN..SP	13	14	15	2251 611 ..076

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			FLANGED			12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK
1500	±10	9	5.0	13	D152K35Y5PN..SP	13	14	15	2251 611 ..126
1800	±10	9	5.0	12	D182K35Y5PN..SP	13	14	15	2251 611 ..176
2200	±10	10	5.0	13	D222K39Y5PN..SP	13	14	15	2251 611 ..226
2700	±10	11	5.0	15	D272K47Y5PN..SP	13	14	15	2251 611 ..276
3300	±10	11	5.0	15	D332K47Y5PN..SP	13	14	15	2251 611 ..326
Class 2 Z5U									
1000	±20	7	5.0	10	D102M28Z5UN..SP	13	14	15	2251 641 ..027
1200	±20	7	5.0	10	D122M28Z5UN..SP	13	14	15	2251 641 ..077
1500	±20	7	5.0	10	D152M28Z5UN..SP	13	14	15	2251 641 ..127
1800	±20	8	5.0	11	D182M31Z5UN..SP	13	14	15	2251 641 ..177
2200	±20	8	5.0	11	D222M31Z5UN..SP	13	14	15	2251 641 ..227
2700	±20	8	5.0	11	D272M31Z5UN..SP	13	14	15	2251 641 ..277
3300	±20	8	5.0	11	D332M31Z5UN..SP	13	14	15	2251 641 ..327
3900	±20	10	5.0	13	D392M39Z5UN..SP	13	14	15	2251 641 ..377
4700	±20	10	5.0	13	D472M39Z5UN..SP	13	14	15	2251 641 ..427
5600	±20	10	5.0	13	D562M39Z5UN..SP	13	14	15	2251 641 ..527
6800	±20	10	5.0	15	D682M47Z5UN..SP	13	14	15	2251 641 ..627
8200	±20	11	5.0	15	D822M47Z5UN..SP	13	14	15	2251 641 ..827
10000	±20	12	5.0	15	D103M47Z5UN..SP	13	14	15	2251 641 ..037

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. Packaging codes refer to flanged leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 3 2 kV (DC), kinked;** capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			KINKED			13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	
Class 1 SL0									
10	±10	6.5	5.0	3.2	S100K25SL0P6.K5	13	14	15	2252 562 ..006
15	±10	6.5	5.0	3.2	S150K25SL0P6.K5	13	14	15	2252 562 ..106
22	±10	6.5	5.0	3.2	S220K25SL0P6.K5	13	14	15	2252 562 ..206
33	±10	6.5	5.0	3.2	S330K25SL0P6.K5	13	14	15	2252 562 ..306
47	±10	7.5	5.0	3.2	S470K29SL0P6.K5	13	14	15	2252 562 ..406
68	±10	8.5	5.0	3.2	S680K33SL0P6.K5	13	14	15	2252 562 ..606
100	±10	10.0	5.0	3.2	S101K39SL0P6.K5	13	14	15	2252 562 ..016
150	±10	11.0	5.0	3.2	S151K43SL0P6.K5	13	14	15	2252 562 ..116
Class 2 Y5P									
100	±10	6.5	5.0	3.2	S101K25Y5PP6.K5	13	14	15	2252 612 ..016
150	±10	6.5	5.0	3.2	S151K25Y5PP6.K5	13	14	15	2252 612 ..116
220	±10	6.5	5.0	3.2	S221K25Y5PP6.K5	13	14	15	2252 612 ..216
330	±10	6.5	5.0	3.2	S331K25Y5PP6.K5	13	14	15	2252 612 ..316
470	±10	6.5	5.0	3.2	S471K25Y5PP6.K5	13	14	15	2252 612 ..416
680	±10	7.5	5.0	3.2	S681K29Y5PP6.K5	13	14	15	2252 612 ..616
1000	±10	8.5	5.0	3.2	S102K33Y5PP6.K5	13	14	15	2252 612 ..026
1500	±10	10.0	5.0	3.2	S152K39Y5PP6.K5	13	14	15	2252 612 ..126
2200	±10	11.0	5.0	3.2	S222K43Y5PP6.K5	13	14	15	2252 612 ..226
3300	±10	12.0	7.5	4.0	S332K53Y5PP63K7	–	–	37	2252 612 ..326
4700	±10	17.5	7.5	4.0	S472K69Y5PP63K7	–	–	37	2252 612 ..426
Class 2 Z5U									
1000	±20	7.5	5.0	3.2	S102M29Z5UP6.K5	13	14	15	2252 642 ..027
1500	±20	7.5	5.0	3.2	S152M29Z5UP6.K5	13	14	15	2252 642 ..127
2200	±20	8.5	5.0	3.2	S222M33Z5UP6.K5	13	14	15	2252 642 ..227
3300	±20	10.0	5.0	3.2	S332M39Z5UP6.K5	13	14	15	2252 642 ..327
4700	±20	12.0	7.5	4.0	S472M47Z5UP63K7	–	–	37	2252 642 ..427
6800	±20	15.0	7.5	4.0	S682M59Z5UP63K7	–	–	37	2252 642 ..627
10000	±20	17.5	7.5	4.0	S103M69Z5UP63K7	–	–	37	2252 642 ..037

Notes

1. Maximum thickness 5.0 mm.
2. SH = seated height.
3. Packaging codes refer to outward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

Table 4 2 kV (DC), flanged; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			FLANGED			12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK
Class 1 SL0									
10	±5	7	5.0	10	D100J28SL0P..AP	13	14	15	2251 562 ..005
12	±5	7	5.0	10	D120J28SL0P..AP	13	14	15	2251 562 ..055
15	±5	7	5.0	10	D150J28SL0P..AP	13	14	15	2251 562 ..105
18	±5	7	5.0	10	D180J28SL0P..AP	13	14	15	2251 562 ..155
22	±5	7	5.0	10	D220J28SL0P..AP	13	14	15	2251 562 ..205
27	±5	7	5.0	10	D270J28SL0P..AP	13	14	15	2251 562 ..255
33	±5	7	5.0	10	D330J28SL0P..AP	13	14	15	2251 562 ..305
39	±5	8	5.0	11	D390J31SL0P..AP	13	14	15	2251 562 ..355
47	±5	8	5.0	11	D470J31SL0P..AP	13	14	15	2251 562 ..405
56	±5	8	5.0	11	D560J31SL0P..AP	13	14	15	2251 562 ..505
68	±5	9	5.0	12	D680J35SL0P..AP	13	14	15	2251 562 ..605
82	±5	9	5.0	12	D820J35SL0P..AP	13	14	15	2251 562 ..805
100	±5	10	5.0	13	D101J39SL0P..AP	13	14	15	2251 562 ..015
120	±5	10	5.0	13	D121J39SL0P..AP	13	14	15	2251 562 ..065
150	±5	11	5.0	14	D151J43SL0P..AP	13	14	15	2251 562 ..115
180	±5	11	5.0	14	D181J43SL0P..AP	13	14	15	2251 562 ..165
Class 2 Y5P									
100	±10	7	5.0	10	D101K28Y5PP..SP	13	14	15	2251 612 ..016
120	±10	7	5.0	10	D121K28Y5PP..SP	13	14	15	2251 612 ..066
150	±10	7	5.0	10	D151K28Y5PP..SP	13	14	15	2251 612 ..116
180	±10	7	5.0	10	D181K28Y5PP..SP	13	14	15	2251 612 ..166
220	±10	7	5.0	10	D221K28Y5PP..SP	13	14	15	2251 612 ..216
270	±10	7	5.0	10	D271K28Y5PP..SP	13	14	15	2251 612 ..266
330	±10	7	5.0	10	D331K28Y5PP..SP	13	14	15	2251 612 ..316
390	±10	7	5.0	10	D391K28Y5PP..SP	13	14	15	2251 612 ..366
470	±10	7	5.0	10	D471K28Y5PP..SP	13	14	15	2251 612 ..416
560	±10	8	5.0	11	D561K31Y5PP..SP	13	14	15	2251 612 ..516
680	±10	8	5.0	11	D681K31Y5PP..SP	13	14	15	2251 612 ..616
820	±10	9	5.0	12	D821K35Y5PP..SP	13	14	15	2251 612 ..816

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
			FLANGED		12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK	FLANGED
1000	±10	9	5.0	12	D102K39Y5PP..SP	13	14	15	2251 612 ..026
1200	±10	10	5.0	14	D122K43Y5PP..SP	13	14	15	2251 612 ..076
1500	±10	10	5.0	14	D152K43Y5PP..SP	13	14	15	2251 612 ..126
1800	±10	11	5.0	14	D182K43Y5PP..SP	13	14	15	2251 612 ..176
2200	±10	11	5.0	15	D222K47Y5PP..SP	13	14	15	2251 612 ..226
Class 2 Z5U									
1000	±20	8	5.0	11	D102M31Z5UP..SP	13	14	15	2251 642 ..027
1500	±20	8	5.0	12	D152M35Z5UP..SP	13	14	15	2251 642 ..127
2200	±20	9	5.0	13	D222M39Z5UP..SP	13	14	15	2251 642 ..227
3300	±20	10	5.0	16	D332M47Z5UP..SP	13	14	15	2251 642 ..327

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. Packaging codes refer to flanged leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 5** 3 kV (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SEATED HEIGHT (mm)	CLEAR TEXT CODE	CATALOGUE NUMBER ⁽²⁾
			KINKED			KINKED ⁽³⁾
Class 1 SL0						
10	±10	8.5	7.5	4.0	S100K33SL0R63K7	2252 563 37006
15	±10	8.5	7.5	4.0	S150K33SL0R63K7	2252 563 37106
22	±10	8.5	7.5	4.0	S220K33SL0R63K7	2252 563 37206
33	±10	8.5	7.5	4.0	S330K33SL0R63K7	2252 563 37306
47	±10	10.0	7.5	4.0	S470K39SL0R63K7	2252 563 37406
68	±10	10.0	7.5	4.0	S680K39SL0R63K7	2252 563 37606
Class 2 Y5P						
100	±10	8.5	7.5	4.0	S101K33Y5PR63K7	2252 613 37016
150	±10	8.5	7.5	4.0	S150K33Y5PR63K7	2252 613 37116
220	±10	8.5	7.5	4.0	S221K33Y5PR63K7	2252 613 37216
330	±10	8.5	7.5	4.0	S331K33Y5PR63K7	2252 613 37316
470	±10	8.5	7.5	4.0	S471K33Y5PR63K7	2252 613 37416
680	±10	10.0	7.5	4.0	S681K39Y5PR63K7	2252 613 37616
1000	±10	11.0	7.5	4.0	S102K43Y5PR63K7	2252 613 37026
1500	±10	13.5	7.5	4.0	S152K53Y5PR63K7	2252 613 37126
2200	±10	15.0	7.5	4.0	S222K59Y5PR83K7	2252 613 38226
3300	±10	17.5	7.5	4.0	S332K69Y5PR83K7	2252 613 38326
Class 2 Z5U						
470	±20	8.5	7.5	4.0	S471M33Z5UR63K7	2252 643 37417
680	±20	8.5	7.5	4.0	S681K33Z5UR63K7	2252 643 37617
1000	±20	8.5	7.5	4.0	S102K33Z5UR63K7	2252 643 37027
1500	±20	10.0	7.5	4.0	S152K39Z5UR63K7	2252 643 37127
2200	±20	11.0	7.5	4.0	S222M43Z5UR63K7	2252 643 37227
3300	±20	13.5	7.5	4.0	S332M53Z5UR63K7	2252 643 37327
4700	±20	15.0	7.5	4.0	S472M59Z5UR83K7	2252 643 38427

Notes

1. Maximum thickness 6.0 mm.
2. Packaging codes refer to outward kinked leads. Other styles available on request.
3. All packaged in bulk.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 6 6 kV (DC), straight;** capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SEATED HEIGHT (mm)	CLEAR TEXT CODE	CATALOGUE NUMBER ⁽²⁾
			STRAIGHT			STRAIGHT ⁽³⁾
Class 1 SL0						
10	±20	15	10	4.0	S100M59SL0U83L0	2252 564 52007
15	±20	15	10	4.0	S472M59SL0U83L0	2252 564 52107
22	±20	15	10	4.0	S472M59SL0U83L0	2252 564 52207
33	±20	15	10	4.0	S472M59SL0U83L0	2252 564 52307
Class 1 S3N						
47	±20	15	10	4.0	S470M59S3NU83L0	2252 574 52407
68	±20	15	10	4.0	S680M59S3NU83L0	2252 574 52607
100	±20	15	10	4.0	S101M59S3NU83L0	2252 574 52017
150	±20	15	10	4.0	S151M59S3NU83L0	2252 574 52117
Class 2 Z5U						
220	±20	15	10	4.0	S221M59Z5UU83L0	2252 644 52217
330	±20	15	10	4.0	S331M59Z5UU83L0	2252 644 52317
470	±20	15	10	4.0	S471M59Z5UU83L0	2252 644 52417
680	±20	15	10	4.0	S681M59Z5UU83L0	2252 644 52617
1000	±20	15	10	4.0	S102M59Z5UU83L0	2252 644 52027
1500	±20	17.5	10	4.0	S152M69Z5UU83L0	2252 644 52127
2200	±20	19	10	4.0	S222M75Z5UU83L0	2252 644 52227

Notes

1. Maximum thickness 8.0 mm.
2. Packaging codes refer to straight leads. Other styles available on request.
3. All packaged in bulk.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE			
	1 kV	2 kV	3 kV	6 kV
Capacitance range:				
Class 1, at 1 MHz, 1.2 V (RMS) ⁽¹⁾	10 to 270 pF	10 to 180 pF	10 to 82 pF	10 to 150 pF
Class 2, at 1 kHz, 1 ± 0.2 V (RMS)	100 to 22000 pF	100 to 10000 pF	100 to 4700 pF	180 to 22000 pF
Tolerance on capacitance	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$	$\pm 10\%$, $\pm 20\%$	$\pm 20\%$
Dielectric strength	200% of rated voltage			
Insulation resistance at 500 V (DC)	≥ 10000 M Ω			
Temperature coefficients on capacitance:				
Class 1	SLO			SLO, S3N
Class 2	Y5P, Z5U			Z5U
Dissipation factor:				
Class 1, at 1 MHz, 1.2 V (RMS) C \leq 30 pF	$\leq 20 \times (10/C + 0.7) \times 10^{-4}$ max.			
Class 1, at 1 MHz, 1.2 V (RMS) C > 30 pF	$\leq 20 \times 10^{-4}$			
Class 2, at 1 kHz, 1 ± 0.2 V (RMS)	$\leq 3.0\%$			
Operating temperature range	-30 to +85 °C			

Note

- 1 kHz, 1 ± 0.2 V (RMS) for capacitance values higher than 1000 pF.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV general purpose


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammopack (see Table 7).

Table 7 Size codes and packaging quantities

D _{max} (mm)	SIZE CODE	PACKAGING QUANTITIES		
		BULK	REEL	AMMO
5.0 (0.20")	20	1000	2000	1 kV = 2000 2 kV = 1500
6.5 (0.25")	25			
7.5 (0.29")	29			
8.5 (0.33")	33			
10.0 (0.39")	39			
11.0 (0.43")	43			
12.0 (0.47")	47	1000	—	—
13.5 (0.53")	53	500	—	—
15.0 (0.59")	59			
17.5 (0.69")	69			
19.0 (0.75")	75			

Flanged capacitors on tape, lead spacing 5.0 mm (0.2 inch)

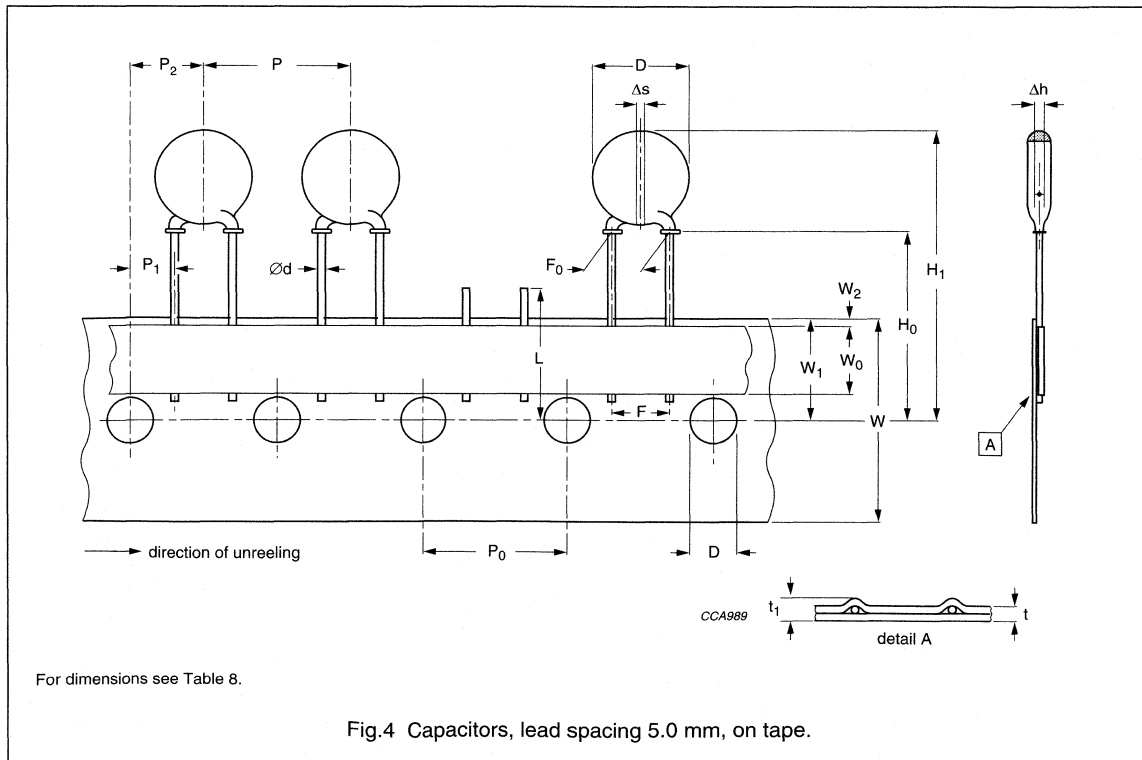

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 8** Dimensions of tape; see Fig.4

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
d	lead diameter	0.6	+0.6 -0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.2; note 1
P ₁	feed-hole centre to lead centre	3.85	±0.5; note 2
P ₂	feed-hole centre to component centre	6.35	±0.7; note 2
F	lead spacing	5.0	+0.6 -0.1
F ₀	lead-to-lead	5.08	+0.5 -0.1
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	±0.5
W ₀	hold-down tape width	6.0	±0.5
W ₁	hole position	9.0	±0.5
W ₂	hold-down tape position	0	±2
H ₀	flange to tape centre	16.0	±0.5
H ₁	maximum component height	28.75	–
	minimum component height	18.75	–
L	maximum length of snipped lead	11	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.65	±0.2
t ₁	maximum thickness of tape and wires	1.5	–


Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors


Class 1 and 2, 1/2/3/6 kV
general purpose

REEL AND TAPE DATA

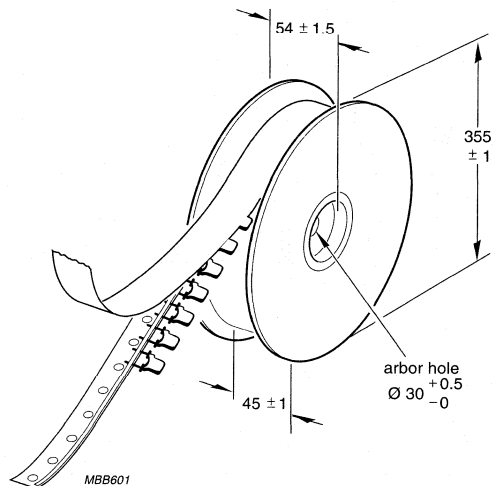

Dimensions in mm.

Fig.5 Reel with capacitors on tape.

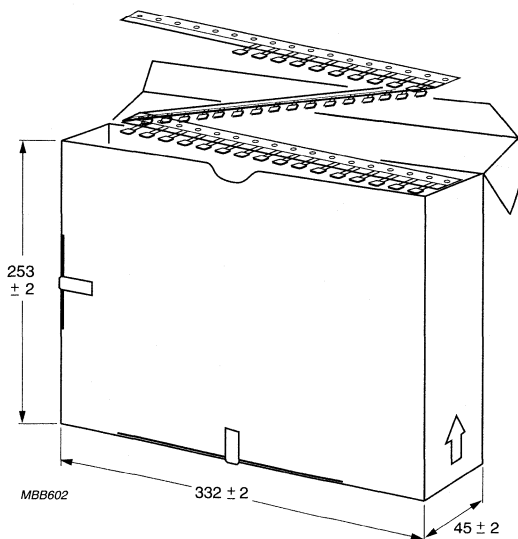


Dimensions in mm.

Fig.6 Ammpack with capacitors on tape.

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose

Kinked capacitors on tape, lead spacing 5.0 mm (0.2 inch)

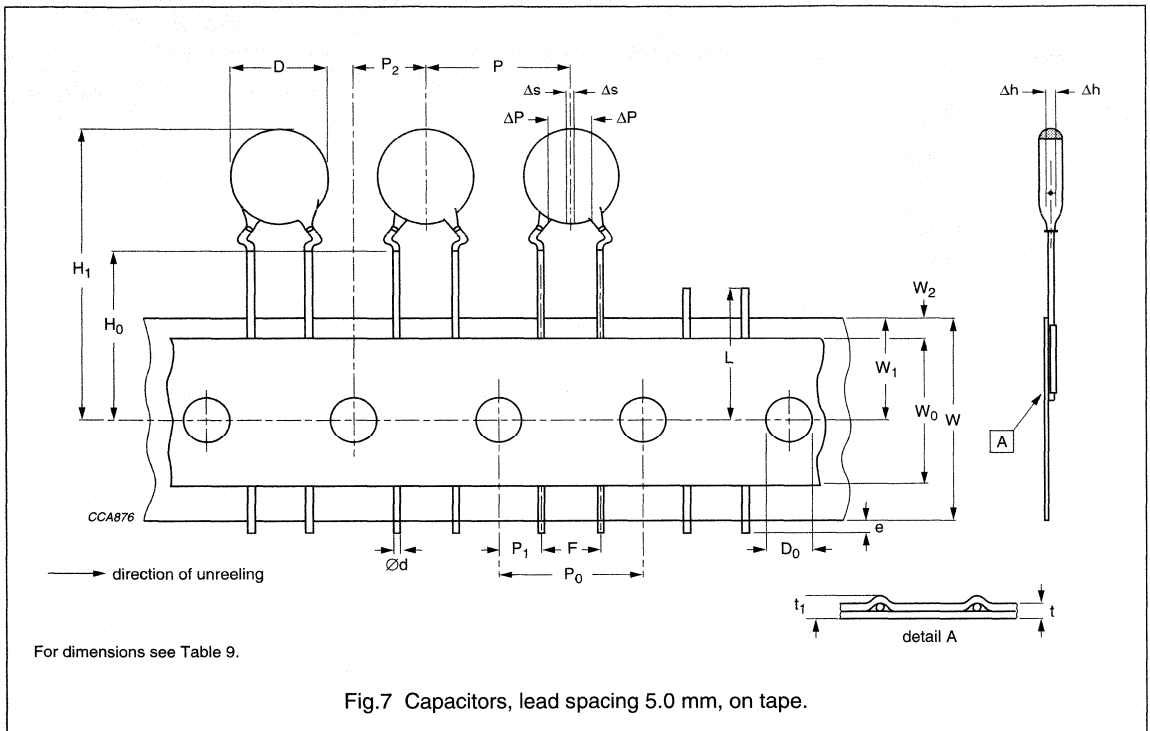

Ceramic disc capacitors

Class 1 and 2, 1/2/3/6 kV
general purpose**Table 9** Dimensions of tape; see Fig.7

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
D	body diameter	11.0 max.	–
d	lead diameter	0.6	±0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.3; note 1
ΔP	plane deviation	1.0 max.	–
P ₁	feed-hole centre to lead centre	3.85	±0.7; note 2
P ₂	feed-hole centre to component centre	6.35	±1.3; note 2
F	lead spacing	5.0	+0.6 –0.4
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	+1.0 –0.5
W ₀	hold-down tape width	5.0 min.	–
W ₁	hole position	9.0	+0.75 –0.5
W ₂	hold-down tape margin	3.0 max.	–
H ₀	height to seating plane	16.0	±0.5
H ₁	maximum component height	32.0	–
e	lead end protrusion	1.0 max.	–
L	maximum length of snipped lead	11.0	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.9 max.	–
t ₁	maximum thickness of tape and wires	1.5 max.	–


Notes

1. Cumulative pitch error: $\pm \leq 1$ mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors


Class 1 and 2, 1/2/3/6 kV
general purpose

REEL AND TAPE DATA

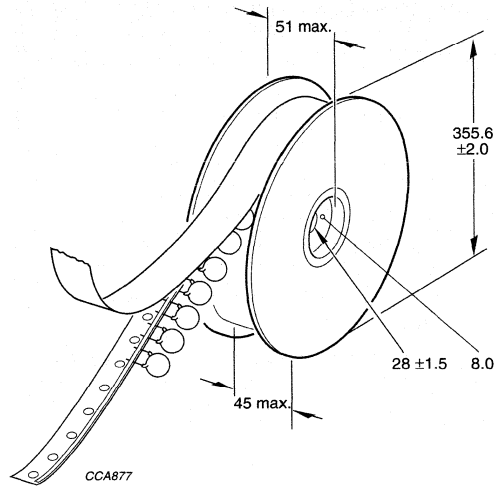

Dimensions in mm.

Fig.8 Reel with capacitors on tape.

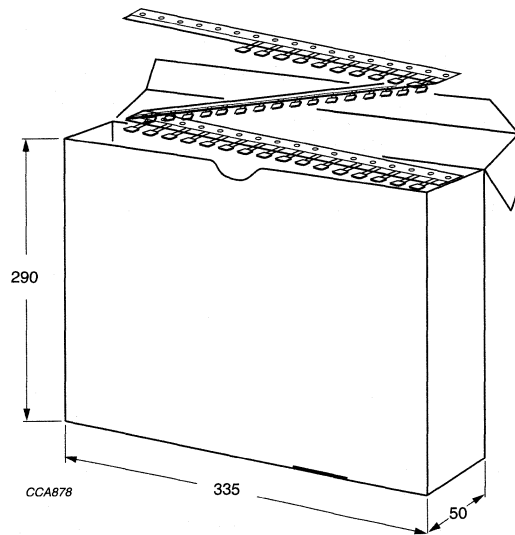

Dimensions in mm.

Fig.9 Ammpack with capacitors on tape.

Ceramic disc capacitors

**Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV**

FEATURES

- High reliability
- Low losses
- High capacitance in small size
- Kinked (preferred) or straight leads.

APPLICATIONS

In electronic circuits where low losses and high capacitance per volume are essential, for example:

- SMPS
- HF ballast
- Snubber and high voltage circuits.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm or 0.8 mm.

The capacitors may be supplied with outward kinked or straight leads with a lead spacing of 5 mm (0.200"), 7.5 mm (0.300") or 10 mm (0.400") and a lead length from 4 to 30 mm. The standard tolerance on capacitance is $\pm 10\%$. Encapsulation is made of gold coloured epoxy-resin, flammable resistant in accordance with "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range	100 to 4700 pF
Rated DC voltage	1 kV; 2 kV; 3 kV
Dielectric strength	200% of rated voltage
Insulation resistance at 500 V (DC)	$\geq 10000 \text{ M}\Omega$
Tolerance on capacitance	$\pm 10\%$; note 1
Dissipation factor	0.5% max.
Temperature coefficient	Y5P
Sectional specifications	IEC 384-9, EIA198
Climatic category	30/085/21

Note

1. Other tolerances available on request.


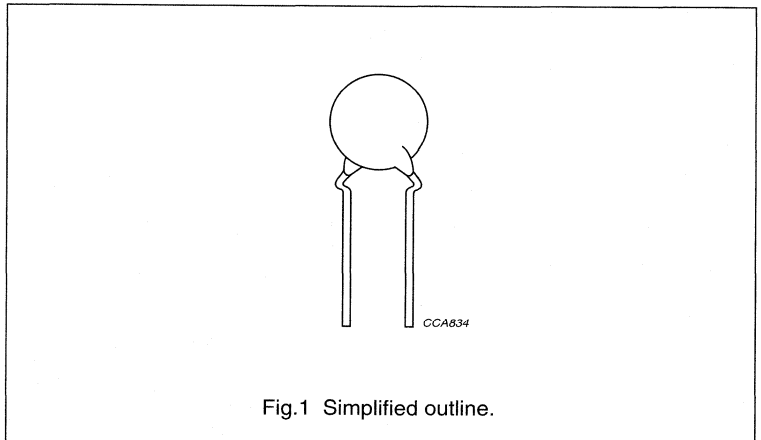


Fig.1 Simplified outline.

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

MECHANICAL DATA

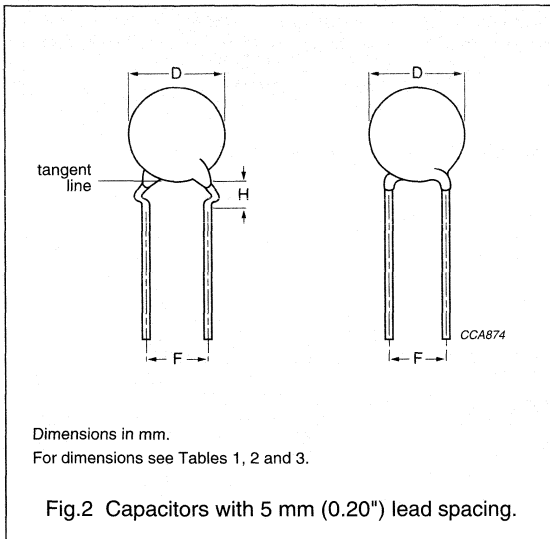

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA 198" and voltage marks.

Examples of marking code

Disc size (D_{max}) ≤ 6.5 mm:

R101 = low loss 100 pF
2 kV

Disc size (D_{max}) ≥ 7.5 mm:

R102 = low loss 1000 pF
3 kV

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

ORDERING INFORMATION (preferred types)

Table 1 1 kV (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
Class 2 Y5P									
100	±10	6.5	5.0	3.2	F101K25Y5PN6.K5	13	14	15	2252 701 ..016
150	±10	6.5	5.0	3.2	F151K25Y5PN6.K5	13	14	15	2252 701 ..116
220	±10	6.5	5.0	3.2	F221K25Y5PN6.K5	13	14	15	2252 701 ..216
330	±10	6.5	5.0	3.2	F331K25Y5PN6.K5	13	14	15	2252 701 ..316
470	±10	7.5	5.0	3.2	F471K29Y5PN6.K5	13	14	15	2252 701 ..416
680	±10	7.5	5.0	3.2	F681K29Y5PN6.K5	13	14	15	2252 701 ..616
1000	±10	8.5	5.0	3.2	F102K33Y5PN6.K5	13	14	15	2252 701 ..026
1500	±10	10.0	5.0	3.2	F152K39Y5PN6.K5	13	14	15	2252 701 ..126
2200	±10	11.0	5.0	3.2	F222K43Y5PN6.K5	13	14	15	2252 701 ..226
3300	±10	15.0	7.5	4.0	F332K59Y5PN63K7	–	–	37	2252 701 ..326
4700	±10	17.5	7.5	4.0	F472K69Y5PN63K7	–	–	37	2252 701 ..426

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. Packaging codes refer to outward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

Table 2 2 kV (DC), kinked: capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽³⁾			CATALOGUE NUMBER ⁽⁴⁾	
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK		
Class 2 Y5P										
100	±10	6.5	5.0	3.2	F101K25Y5PP6.K5	13	14	15	2252 702 ..016	
150	±10	6.5	5.0	3.2	F151K25Y5PP6.K5	13	14	15	2252 702 ..116	
220	±10	6.5	5.0	3.2	F221K25Y5PP6.K5	13	14	15	2252 702 ..216	
330	±10	7.5	5.0	3.2	F331K29Y5PP6.K5	13	14	15	2252 702 ..316	
470	±10	7.5	5.0	3.2	F471K29Y5PP6.K5	13	14	15	2252 702 ..416	
680	±10	8.5	5.0	3.2	F681K33Y5PP6.K5	13	14	15	2252 702 ..616	
1000	±10	11.0	5.0	3.2	F102K43Y5PP6.K5	13	14	15	2252 702 ..026	
1500	±10	12.0	7.5	4.0	F152K47Y5PP6.K7	35	36	37	2252 702 ..126	
2200	±10	15.0	7.5	4.0	F222K59Y5PP63K7	–	–	37	2252 702 ..226	
3300	±10	17.5	7.5	4.0	F332K69Y5PP63K7	–	–	37	2252 702 ..326	
4700	±10	21.5	10.0	4.0	F472K84Y5PP83K0	–	–	48	2252 702 ..426	

Notes

1. Maximum thickness 5.0 mm.
2. SH = seated height.
3. Packaging codes refer to outward kinked leads. Other styles available on request.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

Table 3 3 kV (DC), kinked; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD ⁽²⁾ SPACING F (mm)	SH ⁽³⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT ⁽⁴⁾			CATALOGUE NUMBER ⁽⁵⁾
					13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
Class 2 Y5P									
100	±10	8.5	7.5	4.0	F101K33Y5PR6.K7	35	36	37	2252 703 ..016
150	±10	8.5	7.5	4.0	F151K33Y5PR6.K7	35	36	37	2252 703 ..116
220	±10	8.5	7.5	4.0	F221K33Y5PR6.K7	35	36	37	2252 703 ..216
330	±10	8.5	7.5	4.0	F331K33Y5PR6.K7	35	36	37	2252 703 ..316
470	±10	8.5	7.5	4.0	F471K33Y5PR6.K7	35	36	37	2252 703 ..416
680	±10	10.0	7.5	4.0	F681K39Y5PR6.K7	35	36	37	2252 703 ..616
1000	±10	11.0	7.5	4.0	F102K43Y5PR6.K7	35	36	37	2252 703 ..026
1500	±10	13.5	7.5	4.0	F152K53Y5PR6.K7	35	36	37	2252 703 ..126
2200	±10	15.0	7.5	4.0	F222K59Y5PR83K7	–	–	38	2252 703 ..226
2700	±10	17.5	7.5	4.0	F272K69Y5PR83K7	–	–	38	2252 703 ..276

Notes

1. Maximum thickness 6.0 mm.
2. Feed-hole pitch $P_0 = 15$ mm.
3. SH = seated height.
4. Packaging codes refer to outward kinked leads. Other styles available on request.
5. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

ELECTRICAL CHARACTERISTICS

The capacitors meet the essential requirements of "EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE
Capacitance range at 1 kHz, 1 \pm 0.2 V (RMS)	100 to 4700 pF
Tolerance on capacitance	\pm 10%
Dielectric strength	200% of rated voltage
Insulation resistance after 2 minutes of charging at 500 V (DC)	\geq 10 000 M Ω min.
Temperature coefficient on capacitance	Y5P
Dissipation factor at 1 kHz, 1 \pm 0.2 V (RMS)	0.5% max.
Operating temperature range	-30 to +85 °C
Climatic category	30/085/21

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 4).

Table 4 Disc diameter and packaging quantities

PARAMETER		PACKAGING QUANTITIES		
D_{max} (mm)	VOLTAGE	BULK	REEL	AMMO
6.5 to 11.0	1 kV	1000	2000	2000
6.5 to 11.0	2 kV	1000	2000	1500
12.0	1 kV, 2 kV	1000	1500	2000
13.5	1 kV, 2 kV	500	1500	2000
13.5	3 kV	500	1000	1500
8.5 to 12.0	3 kV	1000	1000	1500
15.0 to 21.5	1 kV, 2 kV, 3 kV	500	—	—

Kinked capacitors on tape, lead spacing 5.0 mm (0.2 inch) or 7.5 mm (0.3 inch)

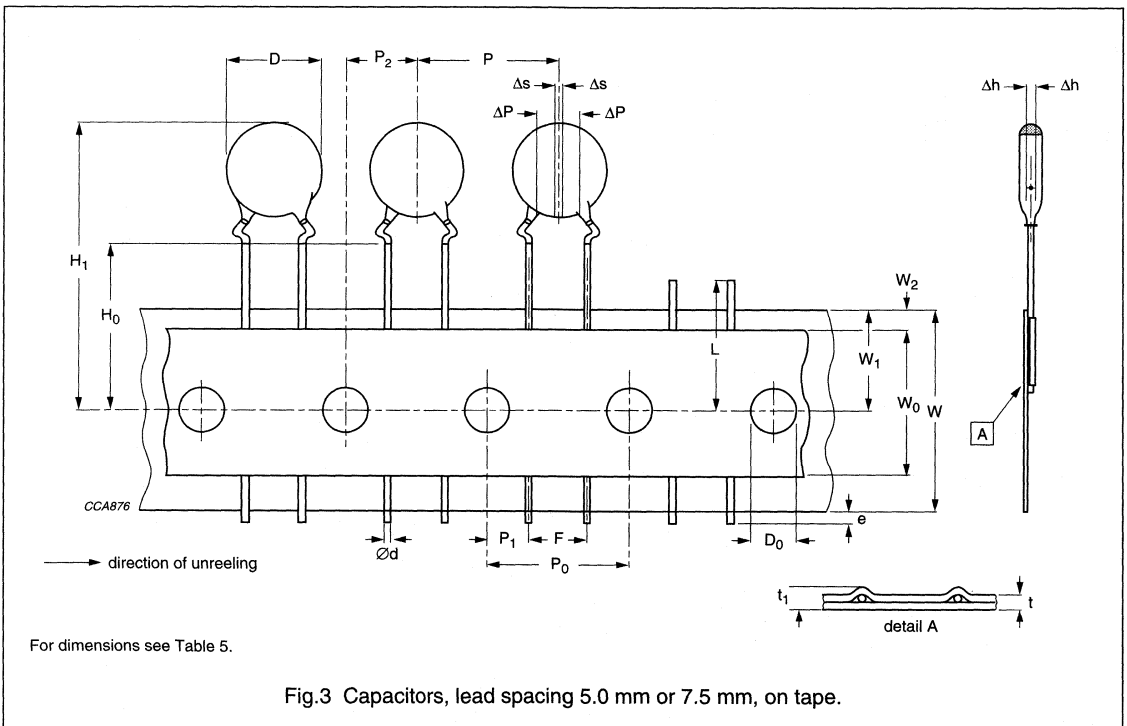

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV**Table 5** Dimensions of tape; see Fig.3

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		FEED-HOLE PITCH $P_0 = 12.7$	FEED-HOLE PITCH $P_0 = 15.0$
D	body diameter	11.0 max.	14.0 max.
d	lead diameter	0.6 ± 0.05	0.6 ± 0.05
P	pitch between capacitors	12.7 ± 1.0	15.0 ± 1.0
P_0	feed-hole pitch	12.7 ± 0.3 ; note 1	15.0 ± 0.3 ; note 1
ΔP	plane deviation	1.0 max.	1.0 max.
P_1	feed-hole centre to lead centre	3.85 ± 0.7 ; note 2	3.75 ± 1.0 ; note 2
P_2	feed-hole centre to component centre	6.35 ± 1.3 ; note 2	7.5 ± 1.5 ; note 2
F	lead spacing	$5.0 + 0.6/-0.4$	7.5 ± 1.0
Δh	component alignment	0 ± 1.0	0 ± 1.0
Δs	deviation along tape, left or right	0 ± 1.0	0 ± 1.0
W	tape width	$18.0 + 1.0/-0.5$	$18.0 + 1.0/-0.5$
W_0	hold-down tape width	5.0 min.	5.0 min.
W_1	hole position	$9.0 + 0.75/-0.5$	$9.0 + 0.75/-0.5$
W_2	hold-down tape margin	3.0 max.	3.0 max.
H_0	height to seating plane	16.0 ± 0.5	16.0 ± 0.5
H_1	maximum component height	32.0	40.0
e	lead end protrusion	1.0 max.	1.0 max.
L	maximum length of snipped lead	11.0	11.0
D_0	feed-hole diameter	4.0 ± 0.2	4.0 ± 0.2
t	total tape thickness	0.9 max.	0.9 max.
t_1	maximum thickness of tape and wires	1.5 max.	1.5 max.

Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors

Class 2, low loss (0.5% max.)
1 kV, 2 kV and 3 kV

REEL AND TAPE DATA

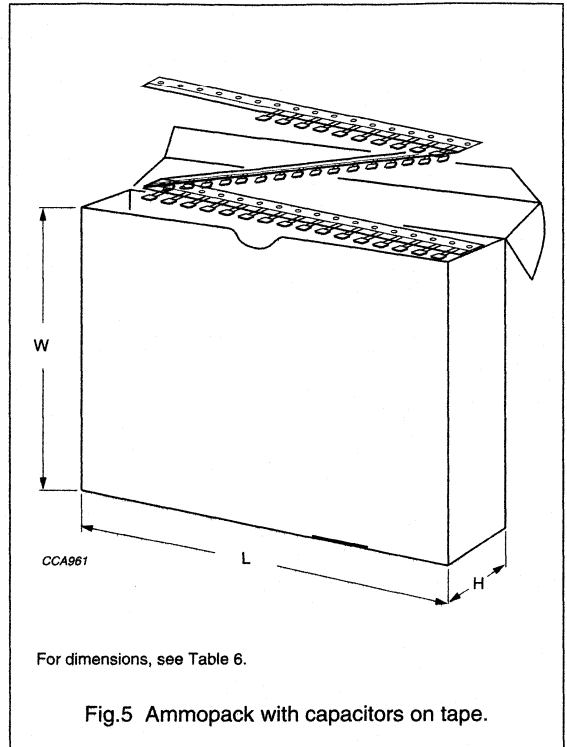
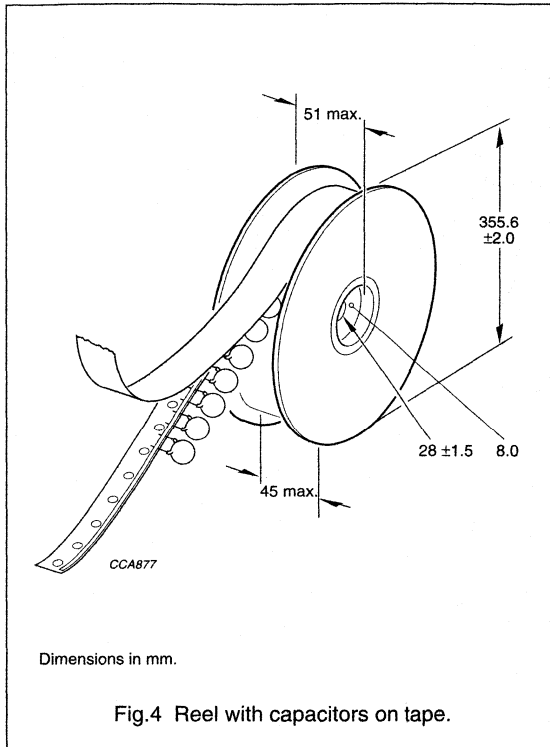


Table 6 Dimensions of ammpack for relevant disc size and taping pitch; see Fig.5

PARAMETER	DISC SIZE (D _{max})		UNIT
	6.5 to 11.0 mm	12.0 to 13.5 mm	
Taping pitch	12.7	15.0	mm
L	335	350	mm
W	290	330	mm
H	50	55	mm

Ceramic disc capacitors

Class 2, low loss (0.2% max.) 1 kV and 2 kV (flanged)

FEATURES

- High reliability
- Low losses
- High capacitance in small size
- Flanged leads.

APPLICATIONS

In electronic circuits where low losses and high capacitance per volume are essential, for example:

- SMPS
- HF ballast
- Snubber and high voltage circuits.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm.

The capacitors have a lead spacing of 5 mm (0.20") and flanged leads. The flange guarantees that the leads are free of lacquer and its shape allows soldering gasses to escape freely, assuring excellent solder joints. This makes the capacitors suitable for both hand mounting and automatic insertion. Encapsulation is made of epoxy-resin, flammable resistant in accordance with "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range	100 to 2200 pF
Rated DC voltage	1 kV; 2 kV
Dielectric strength	200% of rated voltage
Insulation resistance at 500 V (DC)	≥10000 MΩ
Tolerance on capacitance	±10%; note 1
Dissipation factor	0.2% max.
Temperature coefficient	Y5R (2C4)
Sectional specifications	IEC 384-9, EIA198
Climatic category	30/085/21

Note

1. Other tolerances available on request.


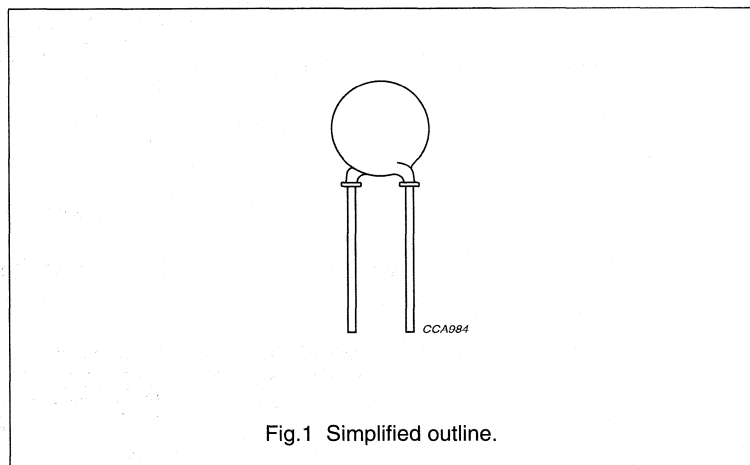


Fig.1 Simplified outline.

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)

MECHANICAL DATA



Dimensions in mm.
For dimensions see Tables 1 and 2.

Fig.2 Capacitors with 5 mm (0.20") lead spacing.

MARKING

Flanged capacitors are marked as follows:

- The body of 1 kV capacitors is tan coloured. The temperature dependency is indicated by a yellow coloured cap.
- The body of 2 kV capacitors is black coloured with no indication of temperature dependency.
- The voltage is marked in clear letters, the low loss characteristics being indicated by the code 'L' marked below the capacitance value.
- Capacitance value is marked on the body in a 3-digit code: two numbers corresponding with the numerical capacitance value and one letter indicating the multiplier and the decimal point.

Example of marking code

n10 = 100 pF

1n5 = 1500 pF

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)

ORDERING INFORMATION

Table 1 1 kV (DC), flanged; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽³⁾
					12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK	
Class 2 Y5R									
100	±10	7	5.0	10	D101K28Y5RN..SP	13	14	15	2251 711 ..016
120	±10	7	5.0	10	D121K28Y5RN..SP	13	14	15	2251 711 ..066
150	±10	7	5.0	10	D151K28Y5RN..SP	13	14	15	2251 711 ..116
180	±10	7	5.0	10	D181K28Y5RN..SP	13	14	15	2251 711 ..166
220	±10	7	5.0	10	D221K28Y5RN..SP	13	14	15	2251 711 ..216
270	±10	7	5.0	10	D271K28Y5RN..SP	13	14	15	2251 711 ..266
330	±10	7	5.0	10	D331K28Y5RN..SP	13	14	15	2251 711 ..316
390	±10	7	5.0	10	D391K28Y5RN..SP	13	14	15	2251 711 ..366
470	±10	7	5.0	10	D471K28Y5RN..SP	13	14	15	2251 711 ..416
560	±10	7	5.0	10	D561K28Y5RN..SP	13	14	15	2251 711 ..516
680	±10	7	5.0	10	D681K28Y5RN..SP	13	14	15	2251 711 ..616
820	±10	8	5.0	11	D821K31Y5RN..SP	13	14	15	2251 711 ..816
1000	±10	8	5.0	11	D102K31Y5RN..SP	13	14	15	2251 711 ..026
1200	±10	9	5.0	12	D122K35Y5RN..SP	13	14	15	2251 711 ..076
1500	±10	9	5.0	12	D152K35Y5RN..SP	13	14	15	2251 711 ..126
1800	±10	9	5.0	12	D182K35Y5RN..SP	13	14	15	2251 711 ..176
2200	±10	10	5.0	13	D222K39Y5RN..SP	13	14	15	2251 711 ..226

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)

Table 2 2 kV (DC), flanged; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽³⁾
					12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK	
Class 2 Y5R									
100	±10	7	5.0	10	D101K28Y5RP..SP	13	14	15	2251 712 ..016
120	±10	7	5.0	10	D121K28Y5RP..SP	13	14	15	2251 712 ..066
150	±10	7	5.0	10	D151K28Y5RP..SP	13	14	15	2251 712 ..116
180	±10	7	5.0	10	D181K28Y5RP..SP	13	14	15	2251 712 ..166
220	±10	7	5.0	10	D221K28Y5RP..SP	13	14	15	2251 712 ..216
270	±10	7	5.0	10	D271K28Y5RP..SP	13	14	15	2251 712 ..266
330	±10	7	5.0	10	D331K28Y5RP..SP	13	14	15	2251 712 ..316
390	±10	7	5.0	10	D391K28Y5RP..SP	13	14	15	2251 712 ..366
470	±10	8	5.0	11	D471K31Y5RP..SP	13	14	15	2251 712 ..416
560	±10	8	5.0	11	D561K31Y5RP..SP	13	14	15	2251 712 ..516
680	±10	9	5.0	12	D681K35Y5RP..SP	13	14	15	2251 712 ..616
820	±10	10	5.0	13	D821K39Y5RP..SP	13	14	15	2251 712 ..816
1000	±10	11	5.0	14	D102K43Y5RP..SP	13	14	15	2251 712 ..026

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)

ELECTRICAL CHARACTERISTICS

The capacitors meet the essential requirements of "IEC 384-9 and EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE	
	1 kV	2 kV
Capacitance range at 1 kHz, 1 ± 0.2 V (RMS)	100 to 2200 pF	100 to 1000 pF
Tolerance on capacitance	$\pm 10\%$	$\pm 10\%$
DC test voltage, duration 1 minute	1 kV	2 kV
Insulation resistance at 500 V (DC)	≥ 10000 M Ω min.	
Temperature coefficient on capacitance	Y5R (2C4)	
Dissipation factor at 1 kHz, 1 ± 0.2 V (RMS)	0.2% max.	
Operating temperature range	-30 to +85 °C	
Climatic category	30/085/21	

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 3).

Table 3 Packaging quantities

BULK	REEL	AMMOPACK
500	2000	2000

Flanged capacitors on tape, lead pitch 5.08 mm (0.2 inch)

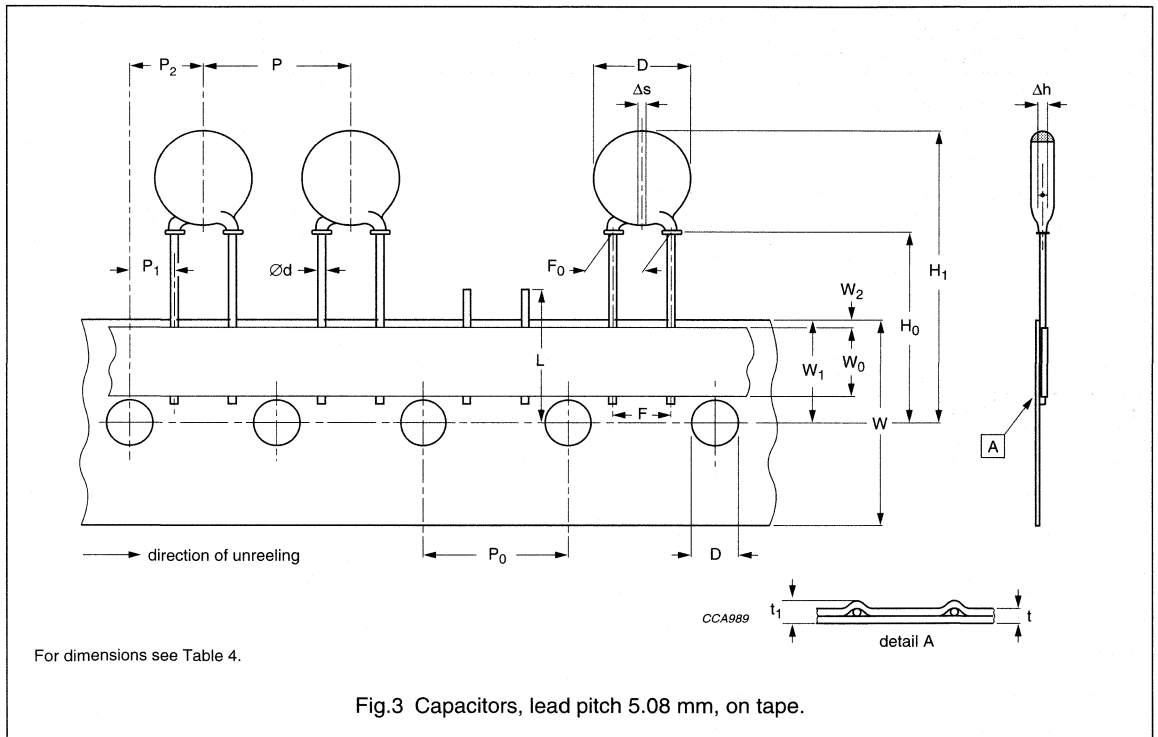

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)**Table 4** Dimensions of tape; see Fig.3

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
d	lead diameter	0.6	+0.6 -0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.2; note 1
P ₁	feed-hole centre to lead centre	3.85	±0.5; note 2
P ₂	feed-hole centre to component centre	6.35	±0.7; note 2
F	lead spacing	5.0	+0.6 -0.1
F ₀	lead-to-lead	5.08	+0.5 -0.1
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	±0.5
W ₀	hold-down tape width	6.0	±0.5
W ₁	hole position	9.0	±0.5
W ₂	hold-down tape position	0	±2
H ₀	flange to tape centre	16.0	±0.5
H ₁	maximum component height	33.75	-
	minimum component height	18.75	-
L	maximum length of snipped lead	11	-
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.65	±0.2
t ₁	maximum thickness of tape and wires	1.5	-



Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors

Class 2, low loss (0.2% max.)
1 kV and 2 kV (flanged)

REEL AND TAPE DATA

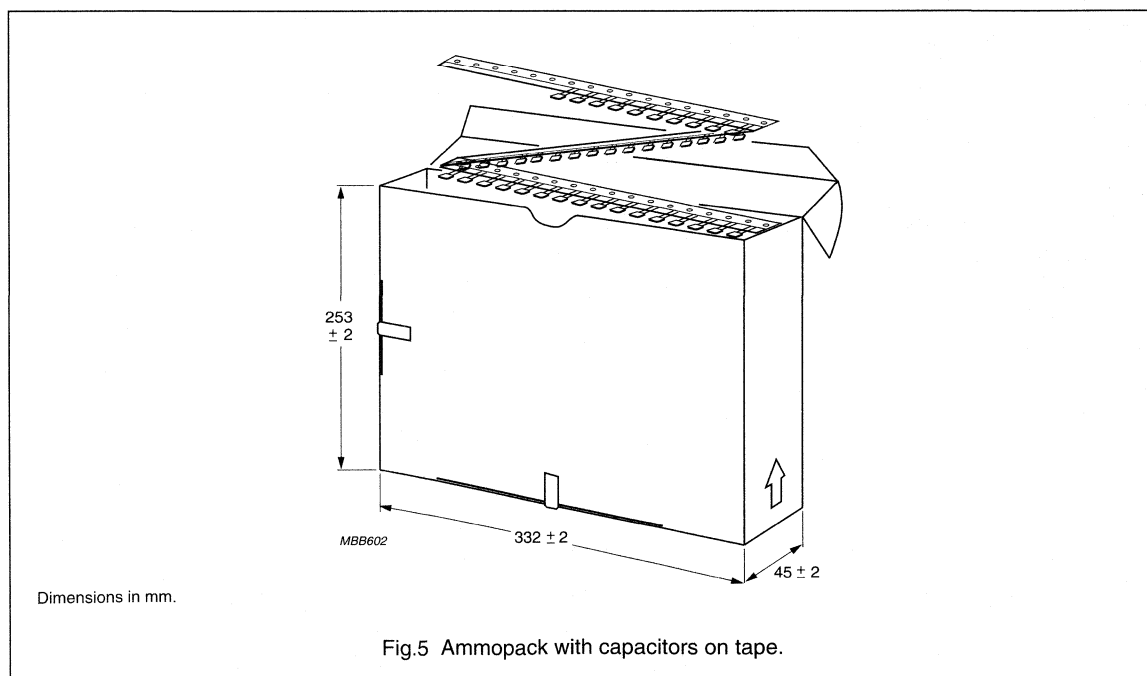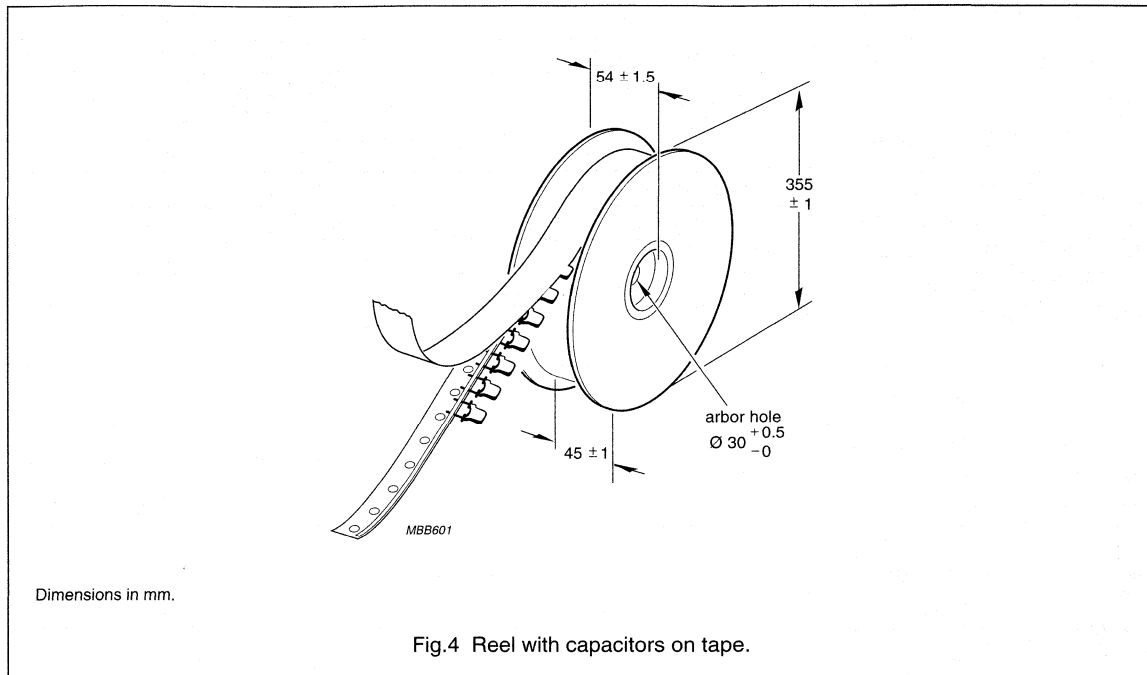

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety (kinked or straight)

FEATURES

- Complying with "EN 132 400" and "IEC 384-14, 2nd edition, including amendment 1.1995"
- High reliability
- Kinked (preferred) or straight leads.

APPLICATIONS

- Across-the-line
- Line by-pass
- Antenna coupling.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm or 0.8 mm.

The capacitors may be supplied with kinked or straight leads having a lead spacing of 7.5 mm (0.300") or 10 mm (0.400") and a lead length from 4 to 30 mm. The standard tolerance on capacitance is $\pm 10\%$ for Y5P material and $\pm 20\%$ for Z5U material. Encapsulation is made of flammable resistant epoxy resin in accordance with "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range at 1 kHz; 1 V (RMS)	100 to 10000 pF
Rated AC voltage	250 V; 50/60 Hz
Dielectric strength	2500 V (AC) for 60 s
Insulation resistance at 500 V (DC)	$\geq 10000 \text{ M}\Omega$
Tolerance on capacitance	$\pm 10\%$; $\pm 20\%$
Dissipation factor at 1 kHz; 1 V (RMS)	2.5% max.
Temperature coefficients	Y5P; Z5U
Operating temperature range	-30 to +85 °C; +10 to +85 °C
Approvals	FIMKO, DEMKO, SEMKO, NEMKO, SEV, VDE (UL, CSA in progress)
Climatic category	25/85/21



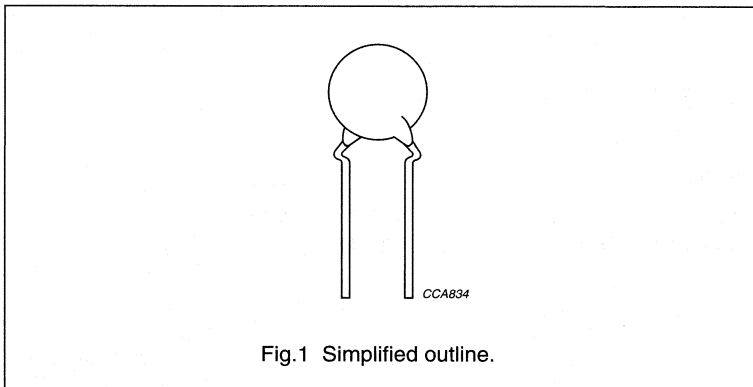


Fig.1 Simplified outline.

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety
(kinked or straight)

MECHANICAL DATA

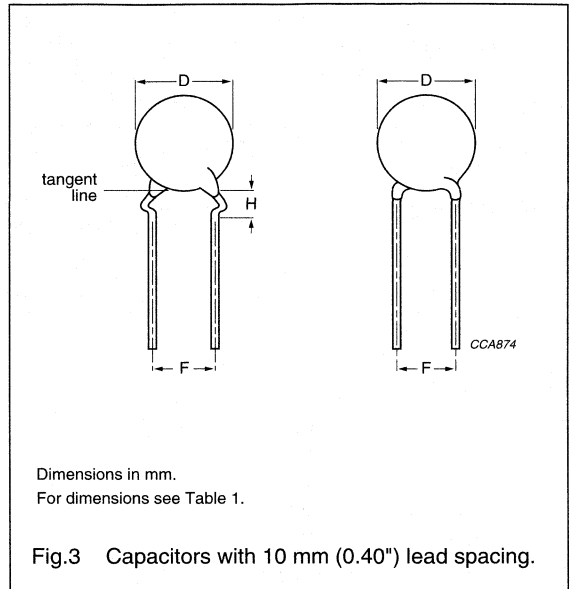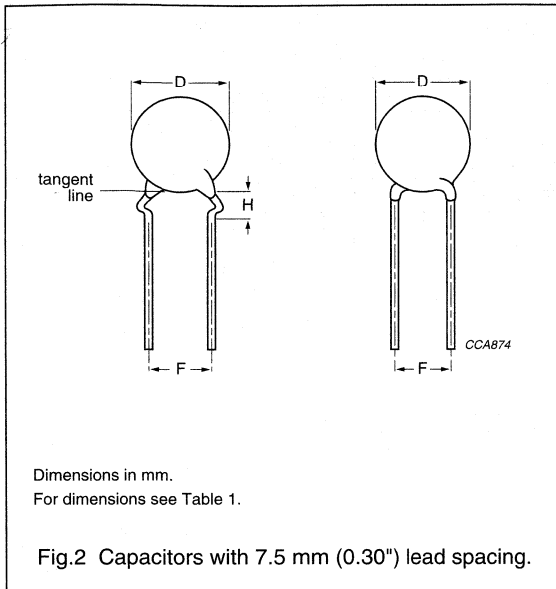

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA198", voltage and approval marks.

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety
(kinked or straight)

ORDERING INFORMATION, TYPE DN

Table 1 250 V (AC); capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽⁴⁾	
						13 th DIGIT: T = REEL; U = AMMO; 3 = BULK; note 3		REEL		AMMO
							KINKED			STRAIGHT
Class X1/Y2 Y5P										
100	±10	8.5	7.5	4.0	S101K33Y5PS6.K7	35	36	41	2252 812 ..016	
150	±10	8.5	7.5	4.0	S151K33Y5PS6.K7	35	36	41	2252 812 ..116	
220	±10	8.5	7.5	4.0	S221K33Y5PS6.K7	35	36	41	2252 812 ..216	
330	±10	8.5	7.5	4.0	S331K33Y5PS6.K7	35	36	41	2252 812 ..316	
470	±10	8.5	7.5	4.0	S471K33Y5PS6.K7	35	36	41	2252 812 ..416	
680	±10	10.0	7.5	4.0	S681K39Y5PS6.K7	35	36	41	2252 812 ..616	
Class X1/Y2 Z5U										
1000	±20	8.5	7.5	4.0	S102M33Z5US6.K7	35	36	41	2252 812 ..027	
1500	±20	10.0	7.5	4.0	S152M39Z5US6.K7	35	36	41	2252 812 ..127	
2200	±20	11.0	7.5	4.0	S222M43Z5US6.K7	35	36	41	2252 812 ..227	
3300	±20	13.5	7.5	4.0	S332M53Z5US6.K7	35	36	41	2252 812 ..327	
3900	±20	13.5	7.5	4.0	S392M53Z5US6.K7	35	36	41	2252 812 ..377	
4700	±20	15.0	10	4.0	S472M59Z5US83L0	–	–	52	2252 812 ..427	
10000	±20	21.5	10	4.0	S103M84Z5US83L0	–	–	52	2252 812 ..037	

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. Replace 14th digit (K) with an (L) for straight leads in bulk.
4. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety
(kinked or straight)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "EIA198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE
Capacitance range at 1 kHz, 1 V (RMS)	100 to 10000 pF
Tolerance on capacitance	$\pm 10\%$, $\pm 20\%$
Rated AC voltage	250 V
AC test voltage	2500 V
Insulation resistance at 500 V (DC)	≥ 10000 M Ω
Temperature coefficients on capacitance	Y5P; Z5U
Dissipation factor at 1 kHz, 1 V (RMS)	2.5% max.
Operating temperature range	+10 to +85 °C (Z5U); -30 to +85 °C (Y5P)

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety
(kinked or straight)


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 2).

Table 2 Size codes and packaging quantities

D _{max} (mm)	SIZE CODE	PACKAGING QUANTITIES		
		BULK	REEL	AMMO
8.5 (0.33")	33	1000	1000	1500
10.0 (0.39")	39			
11.0 (0.43")	43			
12.0 (0.47")	47			
13.5 (0.53")	53	500	-	-
15.0 (0.59")	59			
17.5 (0.69")	69			
19.0 (0.75")	75			
21.5 (0.84")	84			

Kinked capacitors on tape, lead spacing 7.5 mm (0.30 inch)

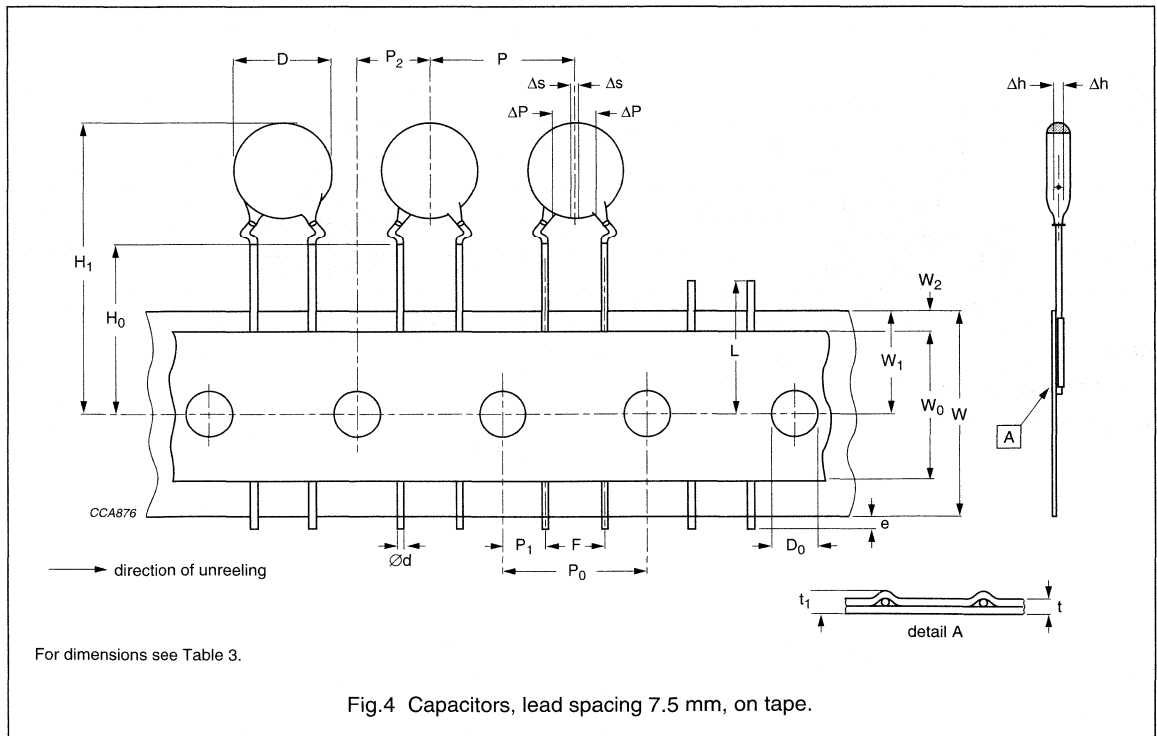

Ceramic disc capacitors

Class X1/Y2, 250 V (AC) safety
(kinked or straight)**Table 3** Dimensions of tape; see Fig.4

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
D	body diameter	14.0 max.	–
d	lead diameter	0.6	±0.05
P	pitch between capacitors	15	±1.0
P ₀	feed-hole pitch	15	±0.3; note 1
ΔP	plane deviation	1.0 max.	–
P ₁	feed-hole centre to lead centre	3.75	±0.7; note 2
P ₂	feed-hole centre to component centre	7.5	±1.3; note 2
F	lead spacing	7.5	±1.0
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±1.0
W	tape width	18.0	+1.0 –0.5
W ₀	hold-down tape width	5.0 min.	–
W ₁	hole position	9.0	+0.75 –0.5
W ₂	hold-down tape margin	3.0 max.	–
H ₀	height to seating plane	16.0	±0.5
H ₁	maximum component height	40	–
e	lead end protrusion	1.0 max.	–
L	maximum length of snipped lead	11.0	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.9 max.	–
t ₁	maximum thickness of tape and wires	1.5 max.	–


Notes

1. Cumulative pitch error: $\pm \leq 1$ mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors


Class X1/Y2, 250 V (AC) safety
(kinked or straight)

REEL AND TAPE DATA

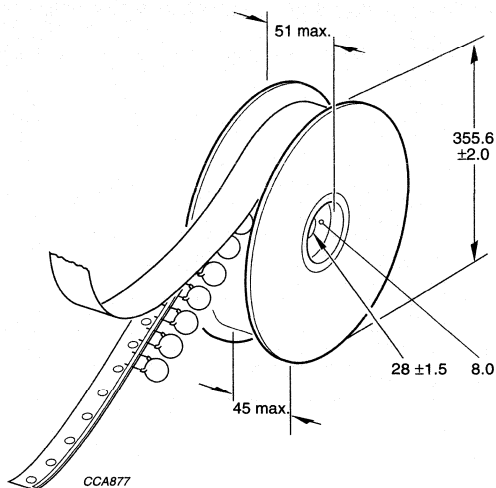

Dimensions in mm.

Fig.5 Reel with capacitors on tape.

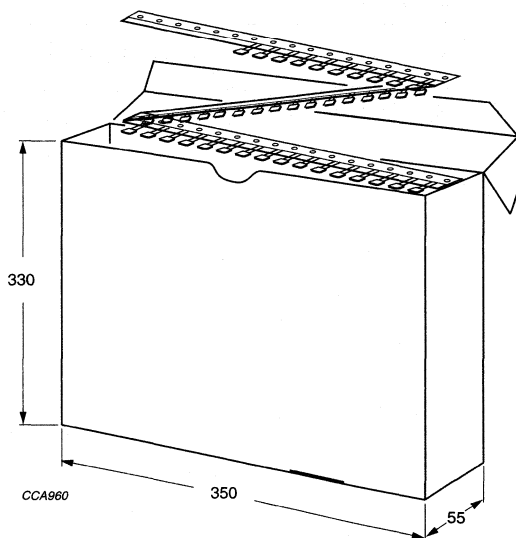

Dimensions in mm.

Fig.6 Ammpack with capacitors on tape.

Ceramic disc capacitors

Class Y2, 250 V (AC) safety (flanged)

FEATURES

- Complying with "EN 132 400" and "IEC 384-14, 2nd edition, including amendment 1.1995"
- High reliability
- Flanged leads.

APPLICATIONS

- Across-the-line
- Line by-pass
- Antenna coupling.

DESCRIPTION

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.5 mm or 0.6 mm.

The capacitors are supplied with flanged leads having a lead spacing of 5 mm (0.200") and a lead length from 4 to 13 mm. The standard tolerance on capacitance is $\pm 10\%$ for Y5P material and $\pm 20\%$ for Y5U material. Encapsulation is made of flammable resistant epoxy resin in accordance with "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range at 1 kHz; 1 V (RMS)	100 to 2200 pF
Rated AC voltage	250 V; 50/60 Hz
Dielectric strength	2500 V (AC) for 60 s
Insulation resistance at 500 V (DC)	$\geq 10000 \text{ M}\Omega$
Tolerance on capacitance	$\pm 10\%$; $\pm 20\%$
Dissipation factor at 1 kHz; 1 V (RMS)	2.5% max.
Temperature coefficients	Y5P; Y5U
Operating temperature range	-30 to +85 °C
Approvals	FIMKO, DEMKO, NEMKO, SEV, VDE (UL, CSA in progress)
Climatic category	25/85/21


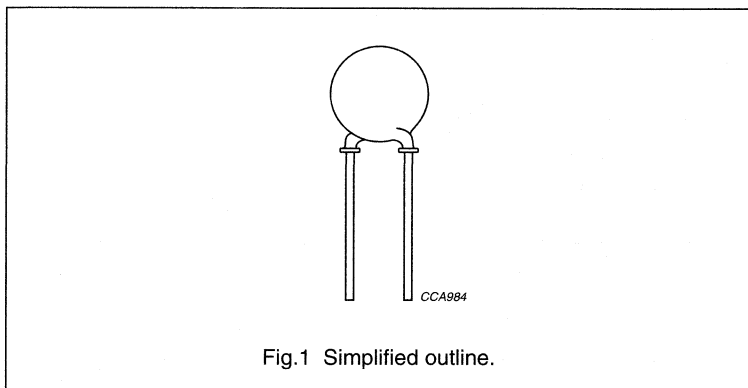


Fig.1 Simplified outline.

Ceramic disc capacitors

Class Y2, 250 V (AC) safety
(flanged)

MECHANICAL DATA



Dimensions in mm.
For dimensions see Table 1.

Fig.2 Capacitor with 5 mm (0.20") lead spacing.

MARKING

Marking indicates capacitance value, the series, subclass, voltage and approval marks.

Marking example

M-Y2

1N0

250 V (AC)

Ceramic disc capacitors

Class Y2, 250 V (AC) safety
(flanged)

ORDERING INFORMATION

Table 1 250 V (AC), flanged; capacitance, mechanical dimensions and ordering information; note 1

C (pF)	TOL. (%)	D _{max} (mm)	LEAD SPACING F (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽³⁾
					12 th AND 13 th DIGIT: WG = REEL; WJ = AMMO; WF = BULK	REEL	AMMO	BULK	
Class Y2 Y5P									
100	±10	8	5	11	D101K31Y5PQ..SP	13	14	15	2251 817 ..016
150	±10	8	5	11	D151K31Y5PQ..SP	13	14	15	2251 817 ..116
220	±10	8	5	11	D221K31Y5PQ..SP	13	14	15	2251 817 ..216
330	±10	8	5	11	D331K31Y5PQ..SP	13	14	15	2251 817 ..316
470	±10	8	5	11	D471K31Y5PQ..SP	13	14	15	2251 817 ..416
Class Y2 Y5U									
680	±20	9	5	12	D681M35Y5UQ..SP	13	14	15	2251 817 ..617
1000	±20	9	5	12	D102M35Y5UQ..SP	13	14	15	2251 817 ..027
1500	±20	9	5	12	D152M35Y5UQ..SP	13	14	15	2251 817 ..127
2200	±20	11	5	14	D222M43Y5UQ..SP	13	14	15	2251 817 ..227

Notes

1. Maximum thickness 4.5 mm.
2. SH = seated height.
3. 8th and 9th digit of the catalogue number to be completed with the packaging code.

Ceramic disc capacitors

Class Y2, 250 V (AC) safety
(flanged)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "IEC 384-14, 2nd edition". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions.

DESCRIPTION	VALUE
Capacitance range at 1 kHz, 1 V (RMS)	100 to 10000 pF
Tolerance on capacitance	$\pm 10\%$, $\pm 20\%$
Rated AC voltage	250 V
AC test voltage	2500 V
Insulation resistance at 500 V (DC)	≥ 10000 M Ω
Temperature coefficients on capacitance	100 pF to 470 pF (Y5P); 680 pF and higher (Y5U)
Dissipation factor at 1 kHz, 1 V (RMS)	2.5% max.
Operating temperature range	-30 to +85 °C
Climatic category	25/085/21

Ceramic disc capacitors

Class Y2, 250 V (AC) safety (flanged)


PACKAGING

The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 2).

Table 2 Packaging quantities

BULK	REEL	AMMOPACK
500	2000	2000

Flanged capacitors on tape, lead pitch 5.0 mm (0.20 inch)

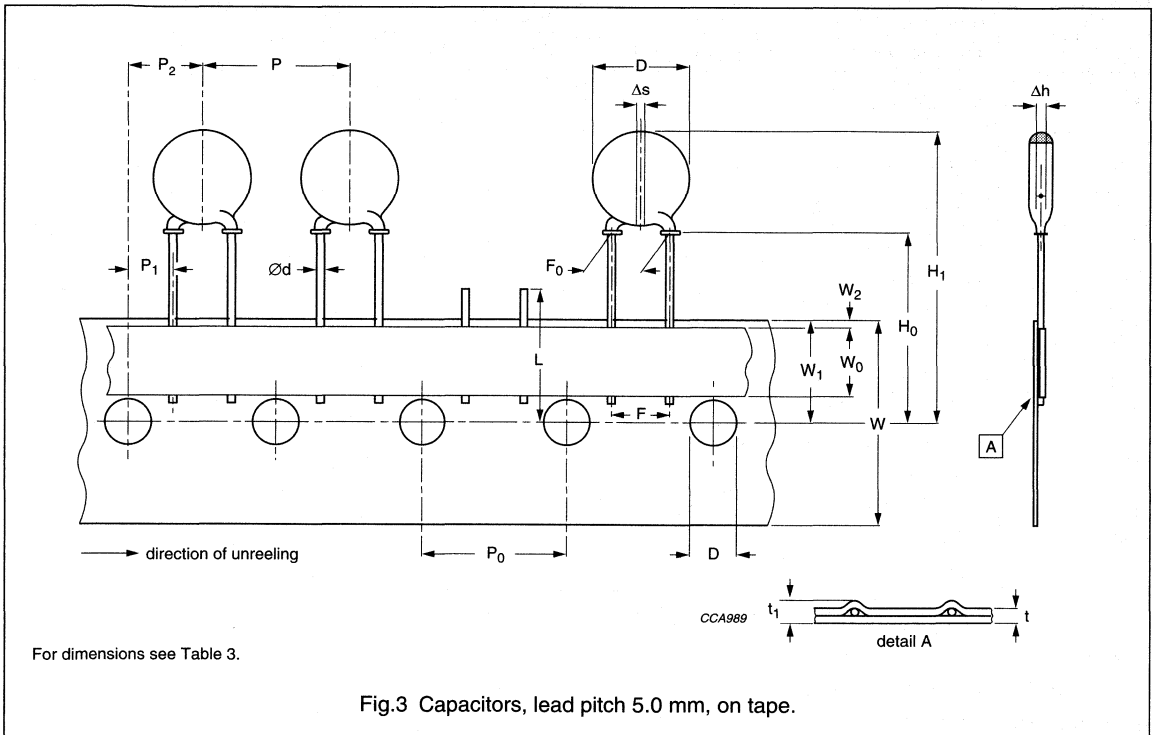

Ceramic disc capacitors

Class Y2, 250 V (AC) safety
(flanged)**Table 3** Dimensions of tape; see Fig.3

SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
d	lead diameter	0.6	+0.6 -0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.2; note 1
P ₁	feed-hole centre to lead centre	3.85	±0.5; note 2
P ₂	feed-hole centre to component centre	6.35	±0.7; note 2
F	lead spacing	5.0	+0.6 -0.1
F ₀	lead-to-lead	5.08	+0.5 -0.1
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	±0.5
W ₀	hold-down tape width	6.0	±0.5
W ₁	hole position	9.0	±0.5
W ₂	hold-down tape position	0	±2
H ₀	flange to tape centre	16.0	±0.5
H ₁	maximum component height	33.75	-
	minimum component height	18.75	-
L	maximum length of snipped lead	11	-
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.65	±0.2
t ₁	maximum thickness of tape and wires	1.5	-



Notes

1. Cumulative pitch error: $\pm \leq 1$ mm/20 pitches.
2. Obliquity maximum 3°.

Ceramic disc capacitors

Class Y2, 250 V (AC) safety
(flanged)

REEL AND TAPE DATA

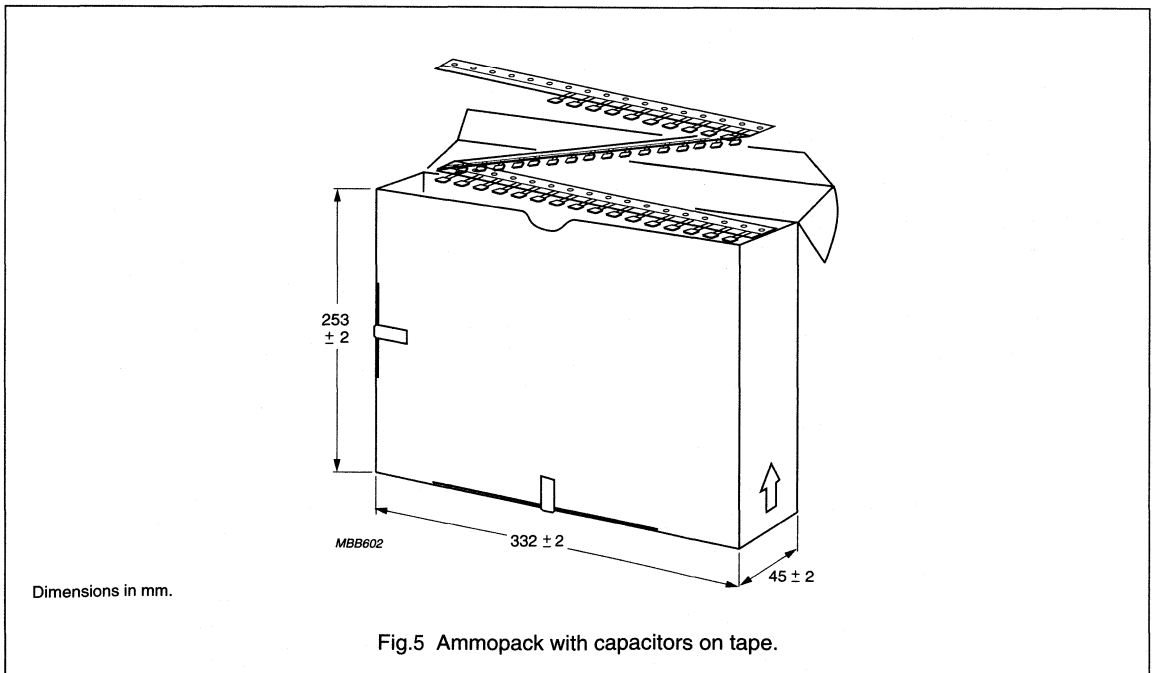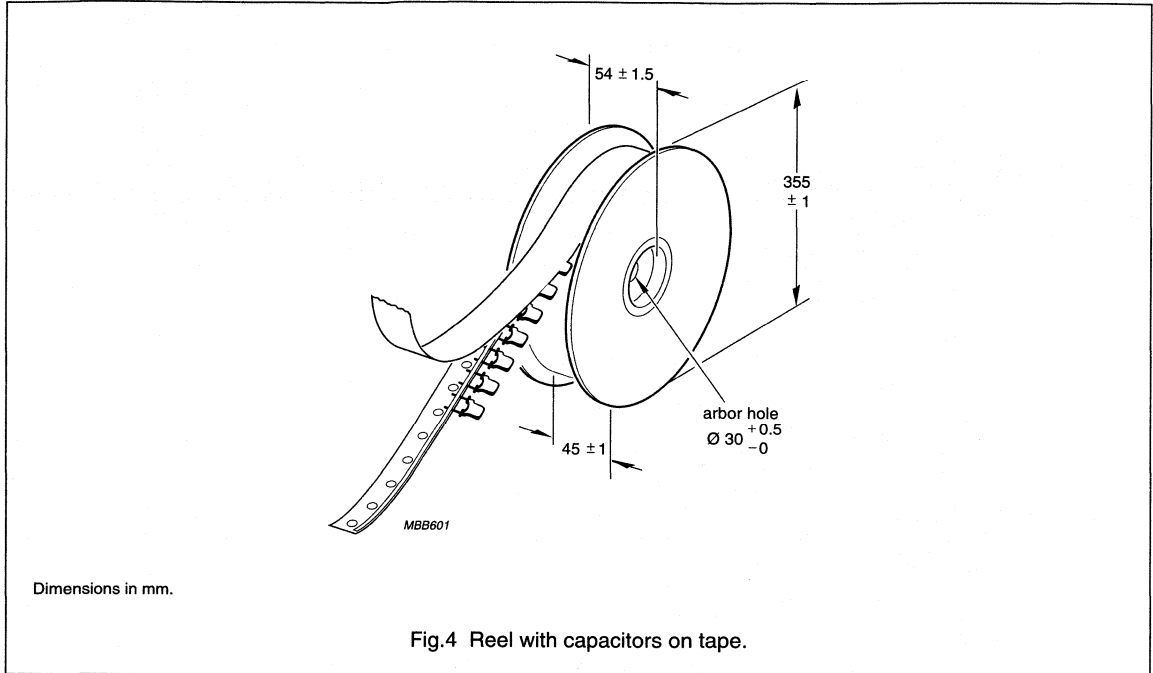

LEADED CERAMIC MULTILAYER CAPACITORS

	Page
NUMERICAL INDEX	78
SELECTION GUIDE	79
GENERAL DATA	
Packaging	81
Characteristic curves	87
Tests and requirements	90
PRODUCT DATA	
Mono-axial™ series	96
Mono-kap™ series	107
Cross reference selection guide for 2222 series	122

Leaded ceramic multilayer capacitors

Numerical index

NUMERICAL INDEX (preferred types)

Sequence of catalogue numbers in accordance with the "12-DIGIT CODE"

SERIES	DESCRIPTION	PAGE
Mono-axial		
2252 205	NP0, 50 V, $\pm 5\%$	98
2252 206	NP0, 100 V, $\pm 5\%$	98
2252 222	X7R, 25 V, $\pm 10\%$	99
2252 225	X7R, 50 V, $\pm 10\%$	99
2252 226	X7R, 100 V, $\pm 10\%$	99
2252 242	Z5U, 25 V, $\pm 20\%$	100
2252 245	Z5U, 50 V, $\pm 20\%$	100
2252 246	Z5U, 100 V, $\pm 20\%$	100
2252 262	Y5V, 25 V, $-20\%/+80\%$	100
2252 265	Y5V, 50 V, $-20\%/+80\%$	100
2222 740	NP0, 50 V, $\pm 5\%$	104
2222 740	NP0, 100 V, $\pm 5\%$	104
2222 741	X7R, 50 V, $\pm 10\%$	105
2222 741	X7R, 100 V, $\pm 10\%$	105
2222 742	Z5U, 50 V, $\pm 20\%$	106
2222 742	Z5U, 100 V, $\pm 20\%$	106
Mono-kap		
2252 305	NP0, 50 V, $\pm 5\%$	110
2252 306	NP0, 100 V, $\pm 5\%$	110
2252 325	X7R, 50 V, $\pm 10\%$	111
2252 326	X7R, 100 V, $\pm 10\%$	111
2252 345	Z5U, 50 V, $\pm 20\%$	113
2252 346	Z5U, 100 V, $\pm 20\%$	113
2252 362	Y5V, 25 V, $-20\%/+80\%$	114
2252 365	Y5V, 50 V, $-20\%/+80\%$	114
2222 730	NP0, 50 V, $\pm 5\%$ (pitch 2.54 mm)	118
2222 730	NP0, 50 V, $\pm 5\%$ (pitch 5.08 mm)	118
2222 730	NP0, 100 V, $\pm 5\%$ (pitch 2.54 mm)	118
2222 730	NP0, 100 V, $\pm 5\%$ (pitch 5.08 mm)	118
2222 731	X7R, 50 V, $\pm 10\%$ (pitch 2.54 mm)	119
2222 731	X7R, 50 V, $\pm 10\%$ (pitch 5.08 mm)	119
2222 731	X7R, 100 V, $\pm 10\%$ (pitch 2.54 mm)	119
2222 731	X7R, 100 V, $\pm 10\%$ (pitch 5.08 mm)	119
2222 733	Z5U, 50 V, $\pm 20\%$ (pitch 2.54 mm)	121
2222 733	Z5U, 50 V, $\pm 20\%$ (pitch 5.08 mm)	121
2222 733	Z5U, 100 V, $\pm 20\%$ (pitch 2.54 mm)	121
2222 733	Z5U, 100 V, $\pm 20\%$ (pitch 5.08 mm)	121

Leaded ceramic multilayer capacitors

Selection guide

SELECTION GUIDE FOR LEADED CERAMIC MULTILAYER CAPACITORS

TC	$U_{R(DC)}$ (V)	CAP. RANGE	CAP. TOL.	CATALOGUE NUMBERS 2252	CLIMATIC CATEGORY	STABILITY	TYPICAL CIRCUITS	TARGET APPLICATION	PAGE
Class 1, axial Mono-axial™ series; preferred types in bold									
NP0 (COG)	50	10 pF to 4700 pF	±5%	205	55/125/21	high	high frequency; tuning; temperature compensation; precision clocking	general industrial; high stress circuits; high stress automotive; professional circuits; measuring instruments	98
			±10%	215 ⁽¹⁾					-
	100	10 pF to 3300 pF	±5%	206					98
			±10%	216 ⁽¹⁾					-
Class 2, axial Mono-axial™ series; preferred types in bold									
2C1 (X7R)	25	0.039 µF to 0.22 µF	±10%	222	55/125/21	high	coupling/decoupling; filtering	high stress circuits; high stress automotive; professional circuits; measuring instruments	99
			±20%	232 ⁽¹⁾					-
	50	100 pF to 0.22 µF	±10%	225					99
			±20%	235 ⁽¹⁾					-
100	100 pF to 0.10 µF	±10%	226	99					
		±20%	236 ⁽¹⁾	-					
Z5U	25	0.047 µF to 0.10 µF	±20%	242	10/085/21	medium	coupling/decoupling; filtering	general industrial; consumer	100
			-20/+80%	252 ⁽¹⁾					-
	50	1000 pF to 0.47 µF	±20%	245					100
			-20/+80%	255 ⁽¹⁾					-
100	1000 pF to 0.10 µF	±20%	246	100					
		-20/+80%	256 ⁽¹⁾	-					
Y5V	25	0.01 µF to 1.0 µF	-20/+80%	262 ⁽¹⁾	10/085/21	medium	coupling/decoupling; filtering	general industrial; consumer	-
			-20/+80%	265					100

Leaded ceramic multilayer capacitors

Selection guide

TC	$U_{R(DC)}$ (V)	CAP. RANGE	CAP. TOL.	CATALOGUE NUMBERS 2552	CLIMATIC CATEGORY	STABILITY	TYPICAL CIRCUITS	TARGET APPLICATION	PAGE
Class 1, radial Mono-kap™ series; preferred types in bold									
NP0 (C0G)	50	10 pF to 0.022 μ F	$\pm 5\%$	305	55/125/21	high	high frequency; tuning; temperature compensation; precision clocking	general industrial; high stress circuits; high stress automotive; professional circuits; measuring instruments	110
			$\pm 10\%$	315 ⁽¹⁾					-
	100	10 pF to 0.01 μ F	$\pm 5\%$	306					110
			$\pm 10\%$	316 ⁽¹⁾					-
Class 2, radial Mono-kap™ series; preferred types in bold									
2C1 (X7R)	25	0.039 μ F to 0.22 μ F	$\pm 10\%$	322⁽¹⁾	55/125/21	high	coupling/decoupling; filtering	high stress circuits; high stress automotive; professional circuits; measuring instruments	-
			$\pm 20\%$	332 ⁽¹⁾					-
	50	100 pF to 1.0 μ F	$\pm 10\%$	325					111
			$\pm 20\%$	335 ⁽¹⁾					-
Z5U	100	100 pF to 0.47 μ F	$\pm 10\%$	326	10/085/21	medium	coupling/decoupling; filtering	general industrial; consumer	111
			$\pm 20\%$	336 ⁽¹⁾					-
	25	0.047 μ F to 0.22 μ F	$\pm 20\%$	342⁽¹⁾					-
			-20/+80%	352 ⁽¹⁾					-
Y5V	50	1000 pF to 2.2 μ F	$\pm 20\%$	345	10/085/21	medium	coupling/decoupling; filtering	general industrial; consumer	113
			-20/+80%	355 ⁽¹⁾					-
	100	1000 pF to 1 μ F	$\pm 20\%$	346					113
			-20/+80%	356 ⁽¹⁾					-
50	0.01 μ F to 1.0 μ F	$\pm 20/+80\%$	362	10/085/21	medium	coupling/decoupling; filtering	general industrial; consumer	114	
		-20/+80%	365					114	

Note

1. Non-preferred types available on request.

Leaded ceramic multilayer capacitors

General data

PACKAGING

The monolithic ceramic capacitors are supplied in bulk packaging, taped on reel, or in ammpack; see Tables 1 and 3.

Mono-axial™ capacitors


Table 1 Packaging quantities and box dimensions

PACKAGING	SIZE CODE	SMALLEST PACKAGING QUANTITY (SPQ)		BOX DIMENSIONS L × W × H (mm)
		2252 SERIES FE 15-digit	2222 SERIES US 15-digit	
Tape on reel	15; 20	7000	5000 ⁽¹⁾	370 × 370 × 90
	29	4000	2500 ⁽¹⁾	
Ammopack	15; 20	4000	4000	265 × 85 × 95
	29	2000	2000	

Note

1. Non-standard SPQ for 2222 series and US 15-digit code (including FE 15-digit code with suffix XV) which will be phased out in the future.

Capacitors on bandolier, Mono-axial series

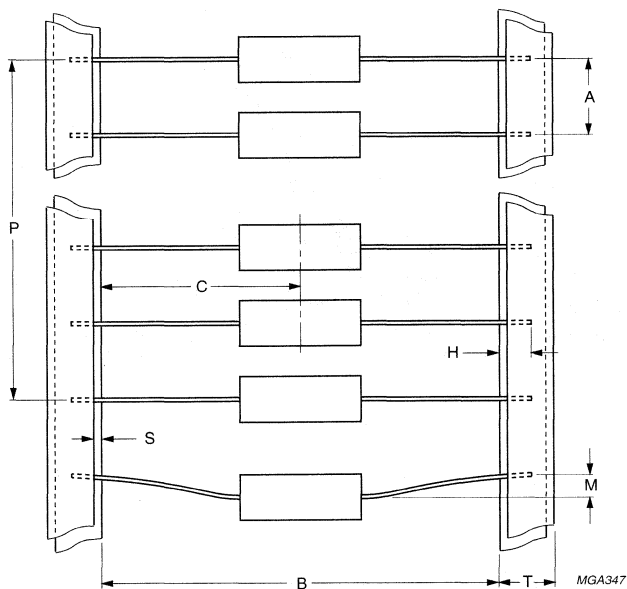

Maximum 0.1% of the total number of capacitors per reel may be missing.
 A maximum of 1 consecutive vacant position is followed by 6 consecutive components.
 Tape begins and ends with minimum of 60 empty positions (300 mm tape).
 Maximum of 5 splices per reel.
 For dimensions see Table 2.

Fig.1 Capacitors on bandolier, Mono-axial series.


Leaded ceramic multilayer capacitors

General data

Table 2 Dimensions of bandolier; see Fig.1

SYMBOL	PARAMETER	DIMENSIONS	
		mm	inch
B	inside tape spacing	52.4 ±1.5	2.062 ±0.059
C	centre-to-tape-spacing	±0.8	±0.031
P	cumulative pitch, 6 consecutive components	±1.5	±0.059
A	components pitch	5 ±0.5	0.197 ±0.015
M	lead bend	<1.2	<0.047
S	exposed adhesive	<0.8	<0.031
T	tape width	6.35	0.250
H	lead sandwich	>3.96	>0.156

REEL DATA, MONO-AXIAL SERIES

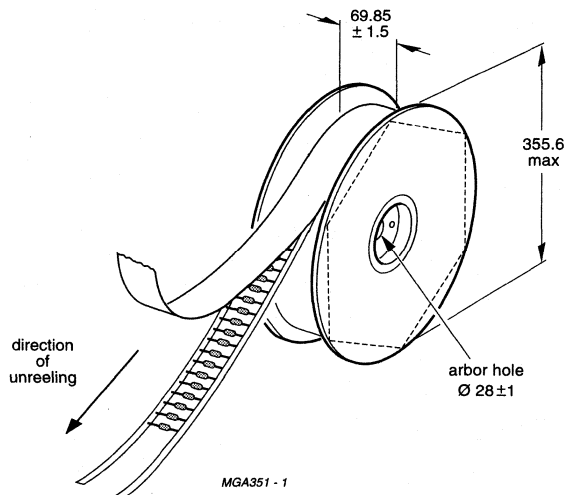

Dimensions in mm.

Maximum 0.1% of the total number of capacitors per reel may be missing.
A maximum of 1 consecutive vacant position is followed by 6 consecutive components.

Tape begins and ends with minimum of 60 empty positions (300 mm tape).

Maximum of 5 splices per reel.

For capacitor length (L) and diameter (ØD) refer to this handbook,
Chapter "Leaded ceramic multilayer capacitors", Section "Mono-axial™", "Table 1".

Fig.2 Reel with capacitors on tape; Mono-axial series.

Leaded ceramic multilayer capacitors

General data

Mono-kap™ capacitors


Table 3 Packaging quantities and box dimensions

PACKAGING	SIZE CODE	SMALLEST PACKAGING QUANTITY (SPQ)		BOX DIMENSIONS L × W × H (mm)
		2252 SERIES FE 15-digit	2222 SERIES US 15-digit	
Bulk; note 1	15; 20	5000	5000	245 × 120 × 65
	30	3000	3000	
Tape on reel	15	4000	2500 ⁽²⁾	370 × 370 × 60
	20	3000	2500 ⁽²⁾	
	30	2500	2500	
Ammopack	15; 20	2500	2500	335 × 290 × 50
	30	2000	2000	

Notes

1. SPQ contains 1 or a multiple of poly-bags, 1000 units per bag.
2. Non-standard SPQ for 2222 series and US 15-digit code (including FE 15-digit code with suffix XV) which will be phased out in the future.

Capacitors on tape, lead spacing 5.0 and 2.5 mm, Mono-kap series

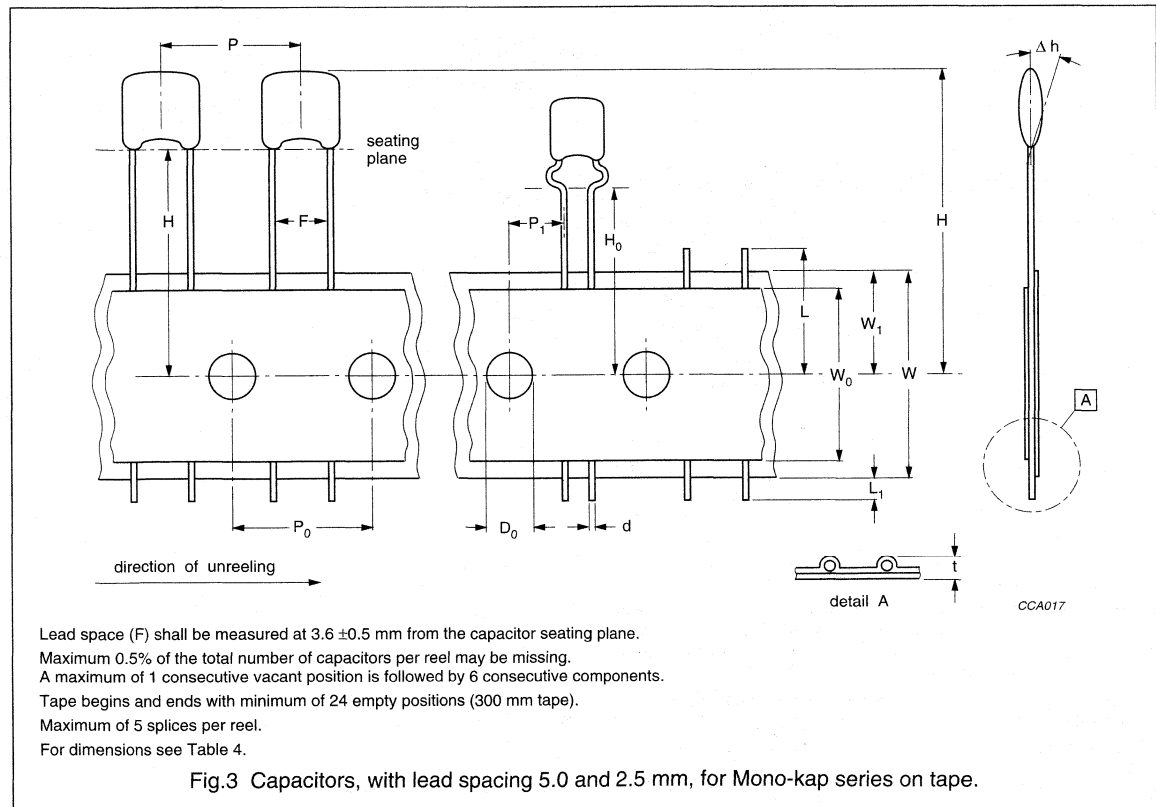

Leaded ceramic multilayer capacitors

General data


Table 4 Dimensions of tape; see Fig.3

SYMBOL	PARAMETER	DIMENSIONS	
		mm	inch
L	cut off length	<11	<0.443
L ₁	lead end protrusion	<2	<0.079
H	height to seating plane	>16	>0.630
H ₀	height to seating plane (formed leads)	16 ±0.5	0.630 ±0.020
H ₁	top of component height	<32	<1.260
Δh	body inclination	0.0 ±<1.0	0 ±<0.039
W	carrier tape width	18 +1.0/-0.5	0.709 +0.039/-0.020
W ₀	hold down tape width	15 ref.; note 1	0.591 ref.; note 1
W ₁	sprocket hole position	9 +0.075/-0.5	0.354 +0.030/-0.020
F	1e lead space; note 2	2.5 +0.6/-0.4	0.100 +0.024/-0.016
	2e lead space; note 2	5.0 +0.6/-0.4	0.200 +0.024/-0.016
P ₀	sprocket hole pitch	12.7 ±0.3	0.500 ±0.012
P ₁	1e sprocket hole centre to lead centre; note 2	5.08 ±0.7	0.200 ±0.028
	2e sprocket hole centre to lead centre; note 2	3.85 ±0.7	0.151 ±0.028
D ₀	sprocket hole diameter	4 ±0.3	0.157 ±0.012
t	overall tape thickness	<0.9	<0.035
d	wire lead diameter	0.5 ±0.05	0.02 ±0.002
P	taping pitch	12.7 ref.	0.500 ref.

Notes

1. Tape width of 6 mm (0.236 inches) permissible.
2. e = 2.54 mm.

REEL AND TAPE DATA, MONO-KAP SERIES

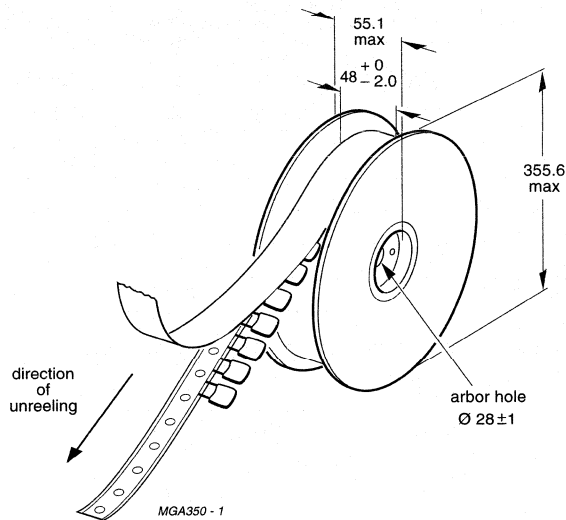

Dimensions in mm.

Maximum 0.5% of the total number of capacitors per reel may be missing.

A maximum of 2 consecutive vacant position is followed by 6 consecutive components.

Tape begins and ends with minimum of 24 empty positions (300 mm tape).

Maximum of 5 splices per reel.


Cumulative pitch tolerance over 20 consecutive units not to exceed ± 1.0 mm.

Lead space (F) shall be measured at 3.6 ± 0.5 mm from the capacitor seating plane.

Fig.4 Reel with capacitors on tape; Mono-kap series.

Leaded ceramic multilayer capacitors

General data

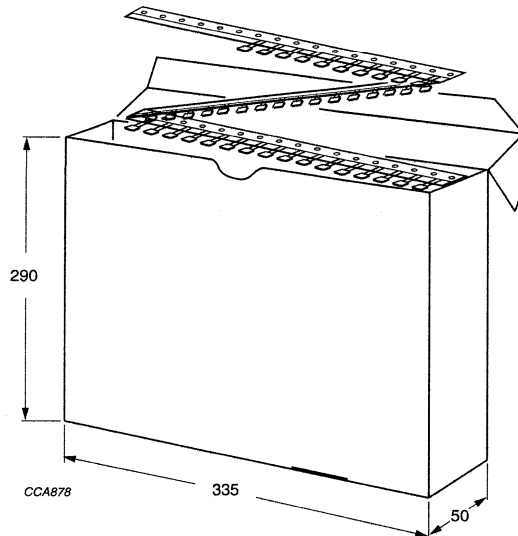

Dimensions in mm.

Maximum 0.5% of the total number of capacitors per box may be missing.

A maximum of 2 consecutive vacant positions is followed by 6 consecutive components.

Tape begins and ends with minimum of 24 empty positions (300 mm tape).



Maximum of 5 splices per box.



Cumulative pitch tolerance over 20 consecutive units not to exceed ± 1.0 mm.


Lead space (F) shall be measured at 3.6 ± 0.5 mm from the capacitor seating plane.

Fig.5 Ammopack with capacitors on tape; Mono-kap series.

CHARACTERISTIC CURVES

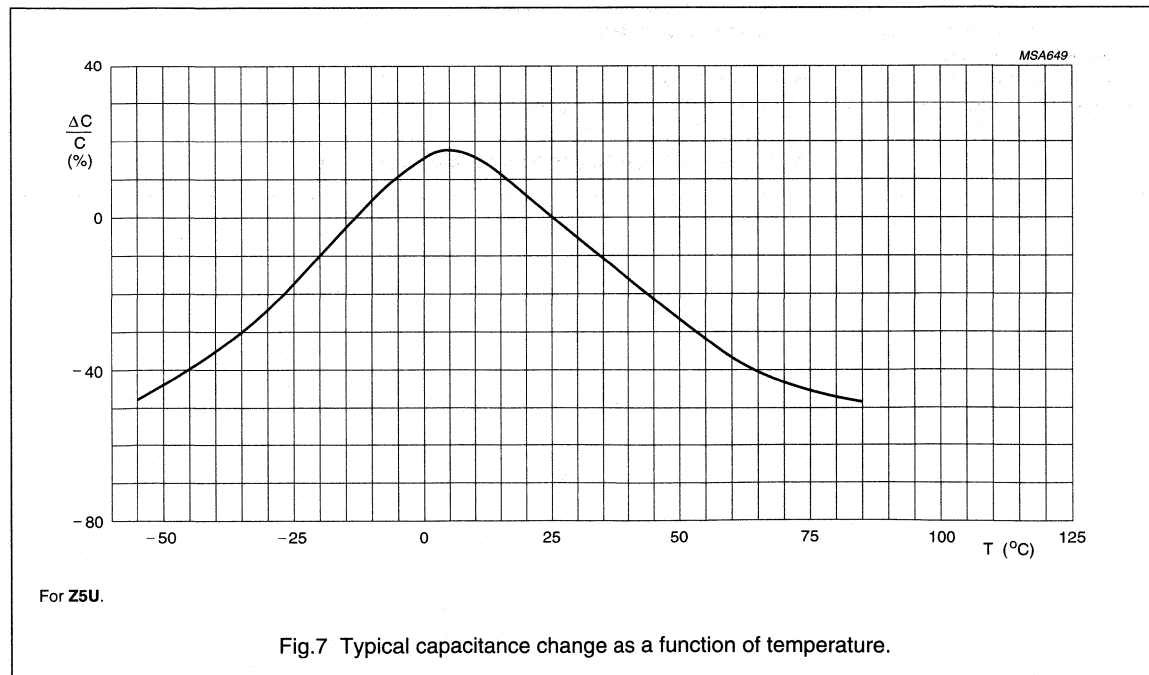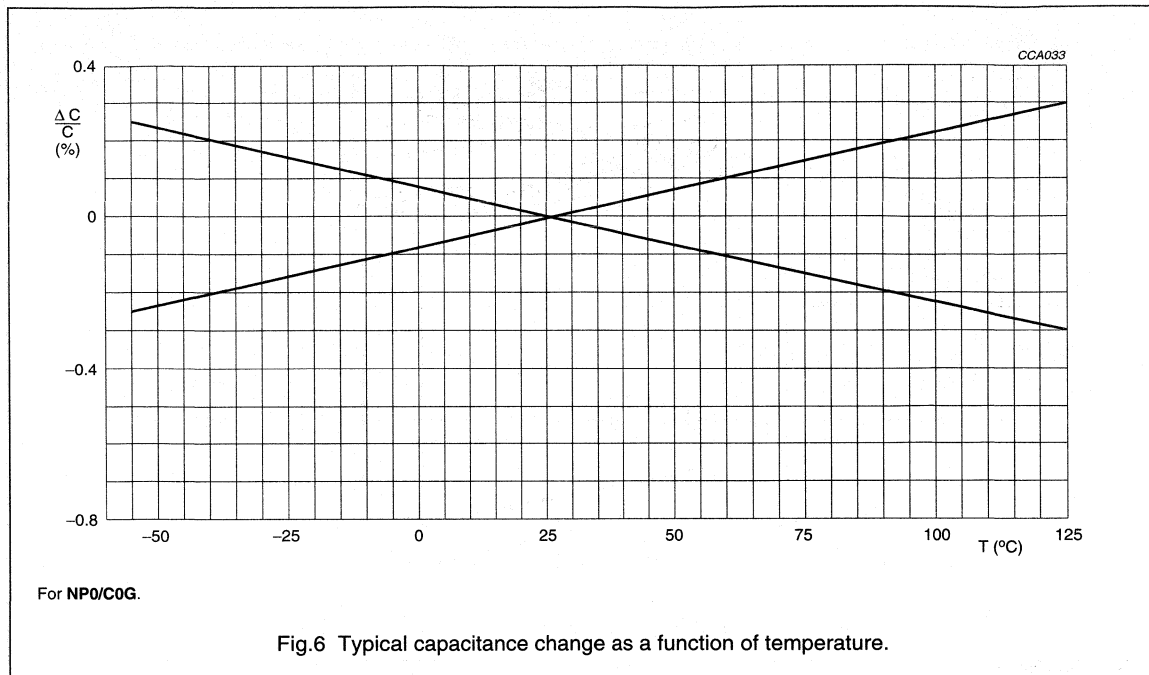

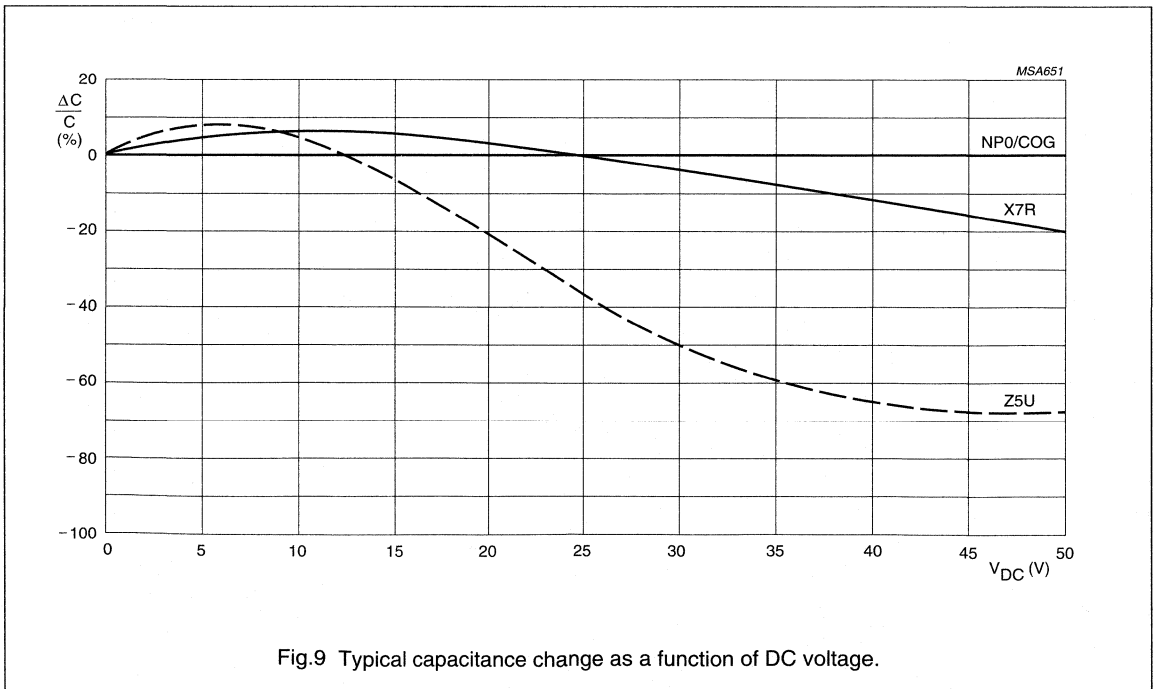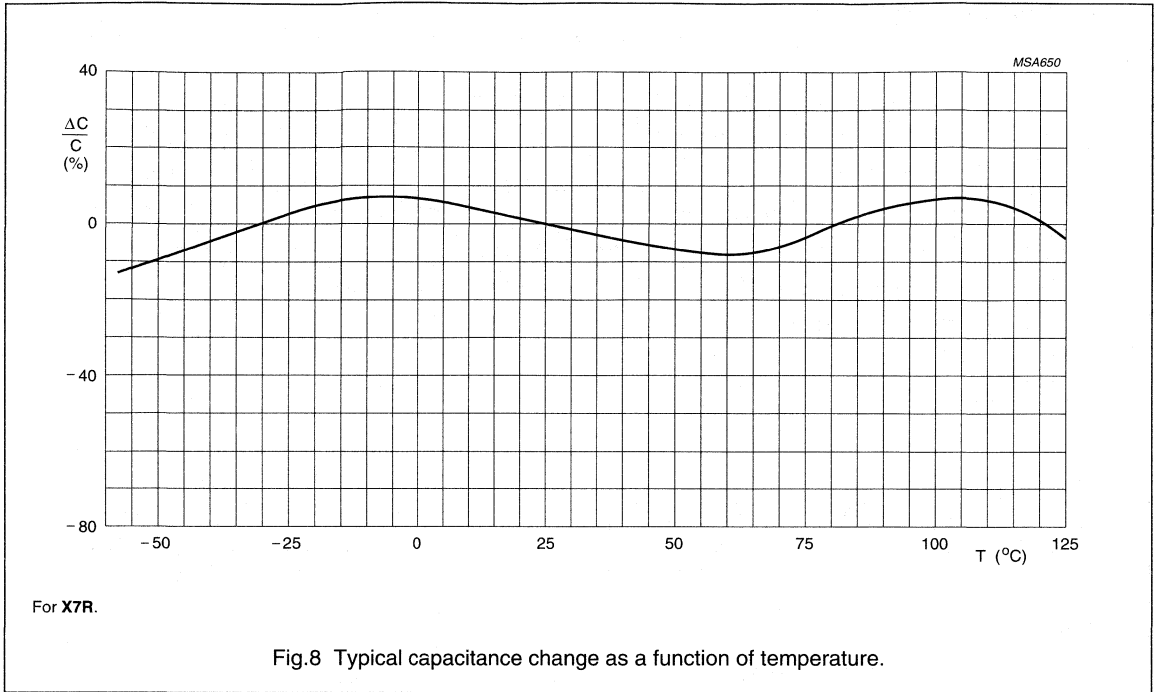

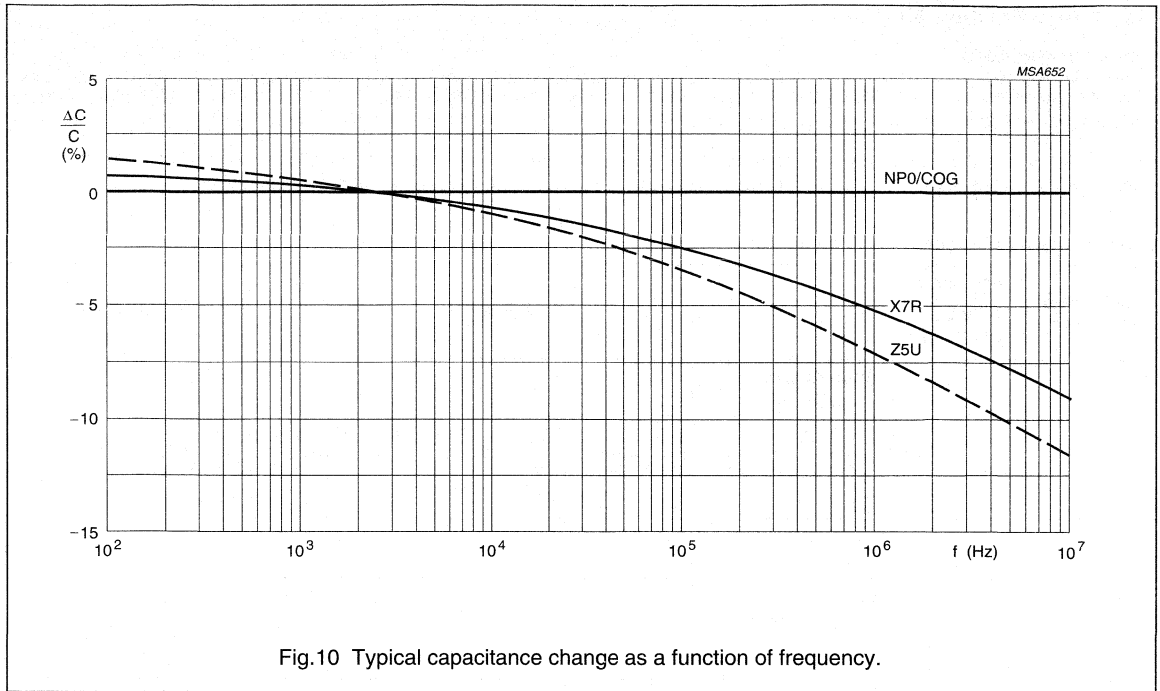

Leaded ceramic multilayer capacitors

TESTS AND REQUIREMENTS

Class 1 capacitors

After manufacture, each capacitor is checked on capacitance, $\tan \delta$ and test voltage. Apart from this the following quality checks are carried out by frequent inspections.

Essentially all tests mentioned in the schedule of "IEC publication 384-8", category 55/125/21 (temperature range $-55/+125$ °C; damp heat, long term, 21 days) are carried out in accordance with "IEC publication 68".

Table 5 Test procedures and requirements

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4	Ua ₁ Ub	robustness of terminations: pull-off tensile strength bending	pull velocity 15 cm/minute; load 5 N axial force 10 N load 5 N; $4 \times 90^\circ$	no lead breakage no lead breakage no lead breakage
4.6	Ta method 1	solderability (solder bath)	235 °C; 2 s	good tinning
4.5	Tb method 1A	resistance to soldering heat	260 °C; 10 s	no visible damage $\Delta C/C: \pm \leq 0.5\%$ or ± 0.5 pF after 1 to 2 hours
4.7	Na	rapid change of temperature	30 minutes at -55 °C and 30 minutes at $+125$ °C; 5 cycles	no damage after 24 hours $\Delta C/C: \pm \leq 0.5\%$ or ± 0.5 pF
4.8	Fc	vibration	10 to 55 to 10 Hz; 0.75 mm displacement; 3 directions; 6 hours	no visible damage
4.9	Eb	bump	4000 bumps in 2 directions; 40 g; pulse time 6 ms	no visible damage
		inflammability	15 s; 35 mm above bunsen burner with flame-height 40 to 60 mm	self-extinguishing within 15 s after removal of bunsen burner
4.3		temperature coefficient	between $+20$ and -55 °C, and between $+20$ and $+125$ °C	within tolerance as specified for each particular material

Leaded ceramic multilayer capacitors

General data

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.11 4.11.2 4.11.3	B Db	climatic sequence: dry heat damp heat (accelerated) 1st cycle	16 hours; +125 °C 12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	no visible damage after recovery of 1 to 2 hours immediately followed by cold test
4.11.4 4.11.5	A M	cold low air pressure	2 hours; -55 °C 1 hour at 8.5 kPa, last 2 minutes rated voltage	no visible damage no breakdown or flashover
4.11.6	Db	damp heat (accelerated) remaining cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >5000 M Ω
4.12	Ca	damp heat, steady state (half number of the lot at rated voltage, other half at zero voltage)	21 days; +40 °C; 90 to 95% RH	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >5000 M Ω
4.13		endurance	1000 hours at maximum temperature, at $1.5 \times$ rated voltage	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 1.5 \times$ specified $\tan \delta$ R_{ins} : >3000 M Ω
		resistance to solvents	3 minutes ultrasonic washing in trichloroethylene; 1 minute drying; 30 °C; 10 brush strokes	marking and colour code must remain legible and not be discoloured; no mechanical or electrical damage or deterioration of the material

Leaded ceramic multilayer capacitors

General data

Class 2 capacitors

After manufacture, each capacitor is checked on capacitance, $\tan \delta$ and test voltage. Apart from this the following quality checks are carried out by frequent inspections.

Essentially all tests mentioned in the schedule of "IEC publication 384-9", categories 55/125/21 and 10/85/21 respectively for X7R-2C1 and Z5U (temperature ranges $-55/+125$ °C and $+10/+85$ °C; damp heat, long term, 21 days) are carried out in accordance with "IEC publication 68".

Table 6 Test procedures and requirements

IEC 384-9 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.1		pre-conditioning	1 hour; $+150$ °C; reference measurement after 24 hours	
4.5	Ua ₁ Ub	robustness of terminations: pull-off tensile strength bending	pull velocity 15 cm/minute; load 5 N axial force 10 N load 5 N; $4 \times 90^\circ$	no lead breakage no lead breakage no lead breakage
4.7	Ta method 1	solderability (solder bath)	235 °C; 2 s	good tinning
4.6	Tb method 1A	resistance to soldering heat	pre-conditioning: 260 °C; 10 s	no visible damage
4.8	Na	rapid change of temperature	pre-conditioning: for X7R: $-55/+125$ °C; 5 cycles; for Z5U: $+10/+85$ °C; 5 cycles	no damage $\Delta C/C$ after 24 hours: X7R: $\pm \leq 10\%$ Z5U: $\pm \leq 20\%$
4.9	Fb	vibration	10 to 55 to 10 Hz; 0.75 mm displacement; 3 directions; 6 hours	no visible damage
4.10	Eb	bump	4000 bumps in 2 directions; 40 g; pulse time 6 ms	no visible damage
		inflammability	15 s; 35 mm above bunsen burner with flame-height 40 to 60 mm	self-extinguishing within 15 s after removal of bunsen burner
		resistance to solvents	3 minutes ultrasonic washing in trichloroethylene; 1 minute drying; 30 °C; 10 brush strokes	marking and colour code must remain legible and not be discoloured; no mechanical or electrical damage or deterioration of the material

Leaded ceramic multilayer capacitors

General data

IEC 384-9 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.12 4.12.1 4.12.2 4.12.3	Ba Db	climatic sequence: pre-conditioning dry heat damp heat (accelerated) 1st cycle	1 hour; +150 °C 16 hours at maximum temperature 12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	no visible damage no visible damage; after recovery of 1 to 2 hours immediately followed by cold test
4.12.4 4.12.5	Aa M	cold low air pressure	2 hours at minimum temperature 1 hour at 8.5 kPa, last 2 minutes rated voltage	no visible damage no breakdown or flashover
4.12.6	Db	damp heat (accelerated) remaining cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	after 24 hours recovery: $\Delta C/C$: X7R: $\pm 15\%$ Z5U: $\pm 20\%$ $\tan \delta$: $\leq 7\%$ R_{ins} : $> 1000 M\Omega$
4.13	Ca	damp heat, steady state (half number of samples at rated voltage, other half of samples no voltage applied)	pre-conditioning: 21 days; +40 °C; 90 to 95% RH	no visible damage after 24 hours: $\Delta C/C$: X7R: $\pm 15\%$ Z5U: $\pm 30\%$ $\tan \delta$: $\leq 7\%$ R_{ins} : $> 1000 M\Omega$
4.14		endurance	pre-conditioning	after 24 hours: $\Delta C/C$: X7R: $\pm 20\%$ Z5U: $\pm 30\%$ $\tan \delta$: $\leq 7\%$ R_{ins} : $> 2000 M\Omega$
4.4		temperature characteristic	pre-conditioning: minimum and maximum temperature	in accordance with specification

PRODUCT DATA

Leaded ceramic multilayer capacitors

Mono-axial™ series

FEATURES

- High capacitance per unit volume
- Low cost.

APPLICATIONS

These conformally coated axial leaded capacitors are designed for commercial and industrial applications in four dielectrics, NP0 (ultra-stable), X7R (stable) and Z5U, Y5V (general purpose). Applications include timing, coupling/decoupling, signal comparison and biasing. Mono-axial™ capacitors are suitable for automatic insertion equipment.

DESCRIPTION

The basic capacitor construction consists of ceramic dielectric materials processed into a tape with a typical thickness range from 0.025 to 0.076 mm. Metal electrode patterns are applied using a thick film screening process. Multiple layers are stacked and laminated in such a manner that electrodes are alternately exposed when the pattern is cut into individual chip capacitors. The capacitors are fired through a high temperature profile to mature the ceramic and metal into a homogeneous unit.


Metal end terminations are applied and fired to provide electrical connection between the individual layers. Tinned leads are attached using a solder. Encapsulation consists of a moisture resistant gold colour conformal epoxy coating that meets the flame requirements of "UL94V-0".

QUICK REFERENCE DATA

DESCRIPTION	VALUE							
	2252 205	2252 206	2252 225	2252 226	2252 245	2252 246	2252 262	2252 265
Capacitance range	10 to 3300 pF		220 pF to 0.22 µF		1 000 pF to 0.47 µF		0.01 to 1.0 µF	
Rated DC voltage	50 V	100 V	50 V ⁽¹⁾	100 V ⁽¹⁾	50 V ⁽¹⁾	100 V ⁽¹⁾	25 V	50 V
Tolerance on capacitance	±5%		±10%		±20%		+80%/-20%	
Temperature coefficient	NP0		X7R		Z5U		Y5V	

Note

1. 7th digit of the catalogue number for U_{R(DC)} 25 V is: 2.

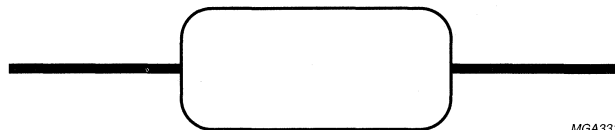


MGA331

Fig.1 Simplified outline.

Leaded ceramic multilayer capacitors

Mono-axial™ series

MECHANICAL DATA

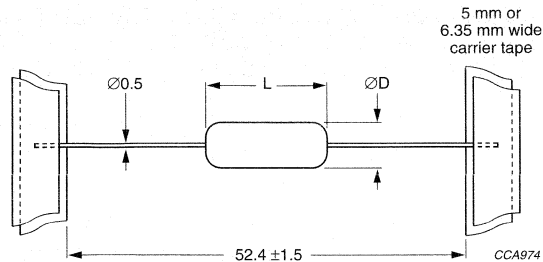

Dimensions in mm.

Fig.2 Tape carrier.

Marking (see Fig.3)

Date code (DDD):

Three-digit code; first digit denotes year, last two denote week of manufacture.

741 = 1997, wk 41

Capacitance value (CCC):

10 pF to 99 pF; actual value in pF (2 digits only)

100 pF and above; coded capacitance value (same as used in P/N).

Capacitance tolerance (T):

Standard EIA tolerance (same as used in P/N).

Material code (M):

A = C0G

C = X7R

E = Z5U

Y = Y5V.

Voltage code (V):

1 = 100 V

3 = 25 V

5 = 50 V.

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE	$L_{\max}^{(1)}$ (mm)	$\varnothing D_{\max}^{(1)}$ (mm)	MASS (g)
15	3.8 (0.150)	2.5 (0.100)	≈0.14
20	5.0 (0.200)	3.0 (0.120)	≈0.14
29	7.5 (0.290)	3.8 (0.150)	≈0.23

Note

1. Dimensions between parentheses are in inches.

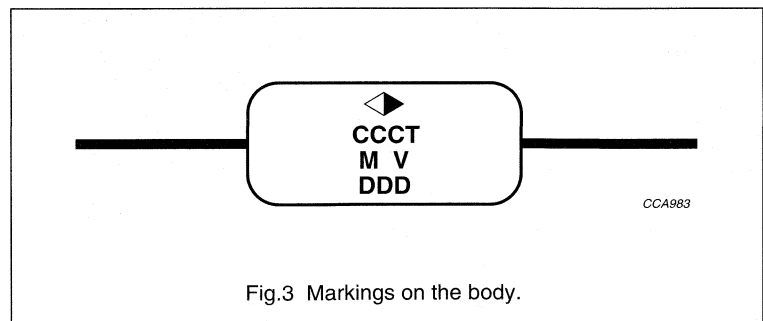


Fig.3 Markings on the body.

PACKAGING

For details refer to this handbook, Section "Leaded ceramic multilayer capacitors", Chapter "Packaging".

Leaded ceramic multilayer capacitors

Mono-axial™ series

ORDERING INFORMATION (preferred types)**Table 2** Capacitance, rated voltage, mechanical dimensions and ordering information

C	U _{R(DC)} (V)	SIZE CODE	CLEAR TEXT CODE	CATALOGUE NUMBER
NP0 (C0G) ±5% tolerance				
10 pF	50	15	A100J15C0GF5TAA	2252 205 20109
	100	15	A100J15C0GH5TAA	2252 206 20109
12 pF	50	15	A120J15C0GF5TAA	2252 205 20129
15 pF	50	15	A150J15C0GF5TAA	2252 205 20159
18 pF	50	15	A180J15C0GF5TAA	2252 205 20189
22 pF	50	15	A220J15C0GF5TAA	2252 205 20229
	100	15	A220J15C0GH5TAA	2252 206 20229
27 pF	50	15	A270J15C0GF5TAA	2252 205 20279
33 pF	50	15	A330J15C0GF5TAA	2252 205 20339
39 pF	50	15	A390J15C0GF5TAA	2252 205 20399
47 pF	50	15	A470J15C0GF5TAA	2252 205 20479
	100	15	A470J15C0GH5TAA	2252 206 20479
56 pF	50	15	A560J15C0GF5TAA	2252 205 20569
68 pF	50	15	A680J15C0GF5TAA	2252 205 20689
82 pF	50	15	A820J15C0GF5TAA	2252 205 20829
100 pF	50	15	A101J15C0GF5TAA	2252 205 20101
	100	15	A101J15C0GH5TAA	2252 206 20101
150 pF	50	15	A151J15C0GF5TAA	2252 205 20151
220 pF	50	15	A221J15C0GF5TAA	2252 205 20221
	100	15	A221J15C0GH5TAA	2252 206 20221
330 pF	50	15	A331J15C0GF5TAA	2252 205 20331
470 pF	50	15	A471J15C0GF5TAA	2252 205 20471
	100	15	A471J15C0GH5TAA	2252 206 20471
680 pF	50	15	A681J15C0GF5TAA	2252 205 20681
1000 pF	50	15	A102J15C0GF5TAA	2252 205 20102
	100	20	A102J20C0GH5TAA	2252 206 40102
1500 pF	50	20	A152J20C0GF5TAA	2252 205 40152
2200 pF	50	20	A222J20C0GF5TAA	2252 205 40222
3300 pF	50	20	A332J20C0GF5TAA	2252 205 40332

Leaded ceramic multilayer capacitors

Mono-axial™ series

C	U _{R(DC)} (V)	SIZE CODE	CLEAR TEXT CODE	CATALOGUE NUMBER
X7R ±10% tolerance				
220 pF	50	15	A221K15X7RF5TAA	2252 225 20221
	100	15	A221K15X7RH5TAA	2252 226 20221
330 pF	50	15	A331K15X7RF5TAA	2252 225 20331
470 pF	50	15	A471K15X7RF5TAA	2252 225 20471
	100	15	A471K15X7RH5TAA	2252 226 20471
680 pF	50	15	A681K15X7RF5TAA	2252 225 20681
1000 pF	50	15	A102K15X7RF5TAA	2252 225 20102
	100	15	A102K15X7RH5TAA	2252 226 20102
1500 pF	50	15	A152K15X7RF5TAA	2252 225 20152
2200 pF	50	15	A222K15X7RF5TAA	2252 225 20222
	100	15	A222K15X7RH5TAA	2252 226 20222
3300 pF	50	15	A332K15X7RF5TAA	2252 225 20332
4700 pF	50	15	A472K15X7RF5TAA	2252 225 20472
	100	15	A472K15X7RH5TAA	2252 226 20472
6800 pF	50	15	A682K15X7RF5TAA	2252 225 20682
0.01 μF	50	15	A103K15X7RF5TAA	2252 225 20103
	100	15	A103K15X7RH5TAA	2252 226 20103
0.015 μF	50	15	A153K15X7RF5TAA	2252 225 20153
0.022 μF	50	15	A223K15X7RF5TAA	2252 225 20223
	100	20	A223K20X7RH5TAA	2252 226 40223
0.033 μF	50	15	A333K15X7RF5TAA	2252 225 20333
0.047 μF	50	15	A473K15X7RF5TAA	2252 225 20473
	100	20	A473K20X7RH5TAA	2252 226 40473
0.068 μF	50	20	A683K20X7RF5TAA	2252 225 40683
0.1 μF	25	15	A104K15X7RE5TAA	2252 222 20104
	50	20	A104K20X7RF5TAA	2252 225 40104
	100	20	A104K20X7RH5TAA	2252 226 40104
0.15 μF	25	20	A154K20X7RE5TAA	2252 222 40154
0.22 μF	25	20	A224K20X7RE5TAA	2252 222 40224

Leaded ceramic multilayer capacitors

Mono-axial™ series

C	U _{R(DC)} (V)	SIZE CODE	CLEAR TEXT CODE	CATALOGUE NUMBER
Z5U ±20% tolerance				
1 000 pF	50	15	A102M15Z5UF5TAA	2252 245 20102
	100	15	A102M15Z5UH5TAA	2252 246 20102
2 200 pF	50	15	A222M15Z5UF5TAA	2252 245 20222
4 700 pF	50	15	A472M15Z5UF5TAA	2252 245 20472
0.01 µF	50	15	A103M15Z5UF5TAA	2252 245 20103
	100	15	A103M15Z5UH5TAA	2252 246 20103
0.022 µF	50	15	A223M15Z5UF5TAA	2252 245 20223
0.047 µF	50	15	A473M15Z5UF5TAA	2252 245 20473
0.1 µF	25	15	A104M15Z5UE5TAA	2252 242 20104
	50	15	A104M15Z5UF5TAA	2252 245 20104
	100	20	A104M20Z5UH5TAA	2252 246 40104
0.22 µF	50	20	A224M20Z5UF5TAA	2252 245 40224
0.47 µF	50	20	A474M20Z5UF5TAA	2252 245 40474
Y5V +80/-20% tolerance				
0.01 µF	50	15	A103Z15Y5VF5TAA	2252 265 20103
0.022 µF	50	15	A223Z15Y5VF5TAA	2252 265 20223
0.047 µF	50	15	A473Z15Y5VF5TAA	2252 265 20473
0.1 µF	25	15	A104Z15Y5VE5TAA	2252 262 20104
	50	15	A104Z15Y5VF5TAA	2252 265 20104
0.22 µF	25	15	A224Z15Y5VE5TAA	2252 262 20224
	50	20	A224Z20Y5VF5TAA	2252 265 40224
0.47 µF	25	20	A474Z20Y5VE5TAA	2252 262 40474
	50	20	A474Z20Y5VF5TAA	2252 265 40474
1.0 µF	25	20	A105Z20Y5VE5TAA	2252 262 40105

Leaded ceramic multilayer capacitors

Mono-axial™ series

ELECTRICAL CHARACTERISTICS**Table 3** Electrical data for NP0, X7R, Z5U and Y5V; also conditions for Tables 5, 6 and 7

The capacitors meet the essential requirements of "EIA198".

Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at barometric pressures of 650 to 800 mm of mercury, and relative humidity not to exceed 75%.

DESCRIPTION	VALUE
Capacitors with temperature coefficient NP0	
Capacitance range: at 1 MHz, 1 V; where $C \leq 1000$ pF at 1 kHz, 1 V; where $C > 1000$ pF	10 to 1000 pF 1200 to 3300 pF
Tolerance on the capacitance	$\pm 5\%$; $\pm 10\%$
Rated DC voltage	50 and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	100000 M Ω or 1000 M $\Omega \times \mu\text{F}$, whichever is less at 25 °C
Temperature coefficient of the capacitance	$0 \times 10^{-6}/\text{K}$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/\text{K}$
Dissipation factor: at 1 MHz, 1 V; where $C \leq 30$ pF at 1 kHz, 1 V; where $C > 30$ pF	$\frac{1}{(400 + 20 \times C)}$ $< 15 \times 10^{-4}$
Operating temperature range	-55 to +125 °C
Storage temperature range	-55 to +85 °C
Capacitors with temperature coefficient X7R	
Capacitance range at 1 kHz, 1 V	220 pF to 0.22 μF
Tolerance on the capacitance	$\pm 10\%$; $\pm 20\%$
Maximum capacitance change with respect to capacitance value at 25 °C	$\pm 15\%$
Rated DC voltage	25 V, 50 V and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	100000 M Ω or 1000 M $\Omega \times \mu\text{F}$, whichever is less at 25 °C
Dissipation factor at 1 kHz, 1 V	$\leq 2.5\%$
Operating temperature range	-55 to +125 °C
Storage temperature range	-55 to +85 °C
Ageing	typical 1% per time decade

Leaded ceramic multilayer capacitors

Mono-axial™ series

DESCRIPTION	VALUE
Capacitors with temperature coefficient Z5U	
Capacitance range at 1 kHz, 0.5 V	1000 pF to 0.47 μ F
Tolerance on the capacitance	$\pm 20\%$; $+80\%$ / -20%
Maximum capacitance change with respect to capacitance value at 25 °C	$+22\%$ / -56%
Rated DC voltage	25, 50 and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	10000 M Ω or 1000 M $\Omega \times \mu$ F, whichever is less at 25 °C
Dissipation factor at 1 kHz, 0.5 V	$\leq 4\%$
Operating temperature range	10 to 85 °C
Storage temperature range	-55 to $+85$ °C
Ageing	typical 6% per time decade
Capacitors with temperature coefficient Y5V	
Capacitance range at 1 kHz, 1 V	0.01 to 1.0 μ F
Tolerance on the capacitance	$+80\%$ / -20%
Maximum capacitance change with respect to capacitance value at 25 °C	$+22\%$ / -56%
Rated DC voltage	25 V and 50 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	10000 M Ω or 1000 M $\Omega \times \mu$ F, whichever is less at 25 °C
Dissipation factor at 1 kHz, 1 V	$\leq 5\%$
Operating temperature range	-30 to $+85$ °C
Storage temperature range	-55 to $+85$ °C
Ageing	typical 6% per time decade

Leaded ceramic multilayer capacitors

Mono-axial™ series

CROSS REFERENCE INFORMATION FOR 2222 SERIES**Table 4** Catalogue numbers for 2222 series; see Tables 5, 6 and 7

CAPACITANCE TOLERANCE	CATALOGUE NUMBERS ⁽¹⁾					
	2222 740		2222 741		2222 742	
	NPO		X7R		Z5U	
	U _R = 50 V (DC)	U _R = 100 V (DC)	U _R = 50 V (DC)	U _R = 100 V (DC)	U _R = 50 V (DC)	U _R = 100 V (DC)
±5%	09...	41...	–	–	–	–
±10%	10...	42...	10...	42...	–	–
±20%	–	–	11...	43...	11...	43...
+80%/–20%	–	–	–	–	12...	44...

Note

- The first 2 digits of the remaining 5-digit suffix are given here; catalogue numbers to be completed by adding the 3-digit suffix for required series and capacitance (see Tables 5, 6 and 7).

Leaded ceramic multilayer capacitors

Mono-axial™ series

Table 5 Range of values for NP0, 2222 740; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	$U_R = 50 \text{ V}$ (DC)	$U_R = 100 \text{ V}$ (DC)	
10	15	15	109
12	15	15	129
15	15	15	159
18	15	15	189
22	15	15	229
27	15	15	279
33	15	15	339
39	15	15	399
47	15	15	479
56	15	15	569
68	15	15	689
82	15	15	829
100	15	15	101
120	15	15	121
150	15	15	151
180	15	15	181
220	15	15	221
270	15	15	271
330	15	15	331
390	15	15	391
470	15	15	471
560	15	15	561
680	15	15	681
820	15	15	821
1000	15	20	102
1200	20	20	122
1500	20	20	152
1800	20	20	182
2200	20	20	222
2700	20	20	272
3300	20	29	332
3900	29	29	392
4700	29	29	472
5600	29	—	562
6800	29	—	682

Leaded ceramic multilayer capacitors

Mono-axial™ series

Table 6 Range of values for X7R, 2222 741; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	$U_R = 50 \text{ V}$ (DC)	$U_R = 100 \text{ V}$ (DC)	
220	15	15	221
270	15	15	271
330	15	15	331
390	15	15	391
470	15	15	471
560	15	15	561
680	15	15	681
820	15	15	821
1000	15	15	102
1200	15	15	122
1500	15	15	152
1800	15	15	182
2200	15	15	222
2700	15	15	272
3300	15	15	332
3900	15	15	392
4700	15	15	472
5600	15	15	562
6800	15	15	682
8200	15	15	822
10000	15	15	103
12000	15	20	123
15000	15	20	153
18000	15	20	183
22000	15	20	223
27000	15	20	273
33000	15	20	333
39000	15	20	393
47000	15	20	473
56000	20	20	563
68000	20	20	683
82000	20	20	823
100000	20	20	104
120000	29	29	124
150000	29	–	154
180000	29	–	184
220000	29	–	224

Leaded ceramic multilayer capacitors

Mono-axial™ series

Table 7 Range of values for Z5U, 2222 742; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	$U_R = 50 \text{ V}$ (DC)	$U_R = 100 \text{ V}$ (DC)	
1000	15	15	102
1200	15	15	122
1500	15	15	152
1800	15	15	182
2200	15	15	222
2700	15	15	272
3300	15	15	332
3900	15	15	392
4700	15	15	472
5600	15	15	562
6800	15	15	682
8200	15	15	822
10000	15	15	103
12000	15	20	123
15000	15	20	153
18000	15	20	183
22000	15	20	223
27000	15	20	273
33000	15	20	333
39000	15	20	393
47000	15	20	473
56000	15	20	563
68000	15	20	683
82000	15	20	823
100000	15	20	104
120000	20	–	124
150000	20	–	154
180000	20	–	184
220000	20	–	224
270000	20	–	274
330000	20	–	334
390000	20	–	394
470000	20	–	474

Leaded ceramic multilayer capacitors

Mono-kap™ series

FEATURES

- Very high capacitance per unit volume
- Low cost.

APPLICATIONS

These conformally coated radial leaded capacitors are designed for commercial and industrial applications in four dielectrics, NP0 (ultra-stable), X7R (stable) and Z5U, Y5V (general purpose). Applications include timing, coupling/decoupling, signal comparison and biasing. Mono-kap™ capacitors are suitable for automatic insertion equipment.

DESCRIPTION

The basic capacitor construction consists of ceramic dielectric materials processed into a tape with a typical thickness range from 0.025 to 0.076 mm. Metal electrode patterns are applied using a thick film screening process. Multiple layers are stacked and laminated in such a manner that electrodes are alternately exposed when the pattern is cut into individual chip capacitors. The capacitors are fired through a high temperature profile to mature the ceramic and metal into a homogeneous unit.

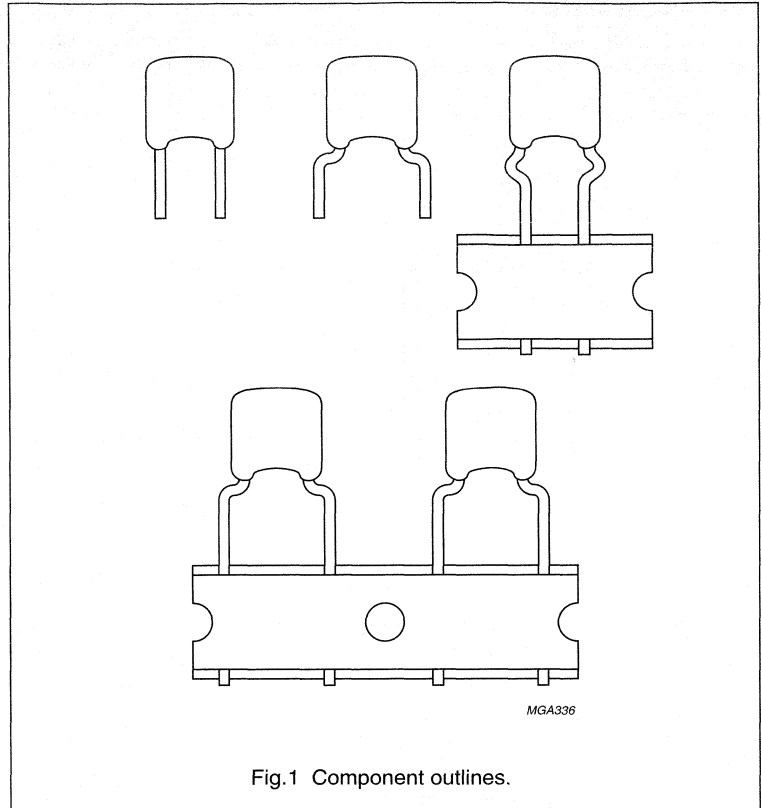


Fig. 1 Component outlines.

Metal end terminations are applied and fired to provide electrical connection between the individual layers. Tinned leads are attached using a solder.

Encapsulation consists of a moisture-resistant gold colour conformal epoxy coating that meets the flame requirements of "UL94V-0".


QUICK REFERENCE DATA

DESCRIPTION	VALUE							
	2252 305	2252 306	2252 325	2252 326	2252 345	2252 346	2252 362	2252 365
Capacitance range	10 pF to 0.022 µF		100 pF to 1.0 µF		1000 pF to 2.2 µF		0.01 to 1.0 µF	
Rated DC voltage	50 V	100 V	50 V	100 V	50 V	100 V	25 V	50 V
Tolerance on capacitance	±5%		±10%		±20%; +80%/-20%		+80%/-20%	
Temperature coefficient	NP0 (COG)		X7R		Z5U		Y5V	

Leaded ceramic multilayer capacitors


Mono-kap™ series

MECHANICAL DATA

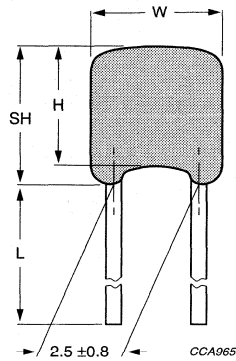


Dimensions in mm.

Fig.2 Component outline for lead spacing 2.5 ± 0.8 mm (straight wires).

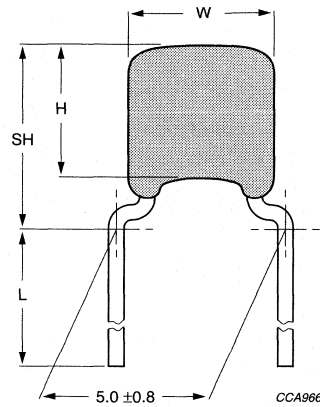


Dimensions in mm.

Fig.3 Component outline for lead spacing 5.0 ± 0.8 mm (flat bent wires).

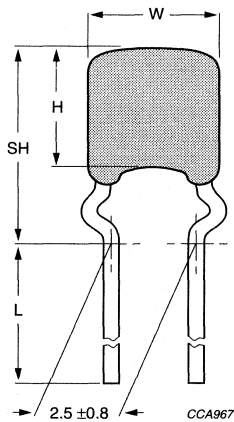

Dimensions in mm.

Fig.4 Component outline for lead spacing 2.5 ± 0.8 mm (outside kink wires).

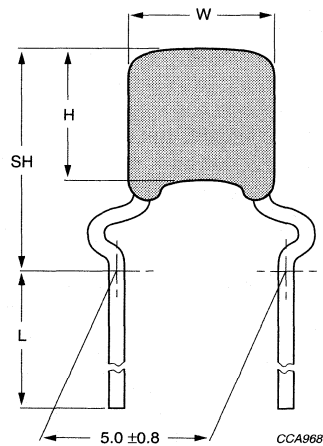

Dimensions in mm.

Lead style available on request.

Fig.5 Component outline for lead spacing 5.0 ± 0.8 mm (outside kink wires).

Leaded ceramic multilayer capacitors

Mono-kap™ series

Physical dimensions

Table 1 Capacitor dimensions and mass; notes 1 and 2

SIZE CODE	W _{max} (mm)	H _{max} (mm)	T _{max} ⁽³⁾ (mm)	MAX. SEATING HEIGHT (SH) (mm)				MASS (g)
				Fig.2	Fig.3	Fig.4	Fig.5	
15	4.0 (0.15)	4.0 (0.15)	2.5 (0.100)	5.58 (0.220)	6.50 (0.256)	7.50 (0.295)	7.50 (0.295)	≈0.15
20	5.0 (0.20)	5.0 (0.20)	3.2 (0.13)	6.58 (0.259)	7.50 (0.295)	8.50 (0.335)	8.50 (0.335)	≈0.16
30	7.5 (0.30)	7.5 (0.30)	3.8 (0.15)	9.08 (0.357)	10.70 (0.421)	11.00 (0.433)	11.0 (0.433)	≈0.42

Notes

1. Bulk packed products have a standard lead length L ≥ 25.4 mm.
2. Dimensions between the parentheses are in inches.
3. Thickness defined as T.

Marking⁽¹⁾⁽²⁾ (see Fig.6)

Capacitance code (CCC):

- 10 pF to 99 pF;
actual value in pF (2 digits only)
- 100 pF and above;
coded capacitance value
(same as used in P/N).

Capacitance tolerance (T):

- Standard EIA tolerance.

Material code (M):

- A = NP0 (COG)
- C = X7R
- E = Z5U
- Y = Y5V.

Voltage code (V):

- 1 = 100 V
- 3 = 25 V
- 5 = 50 V.

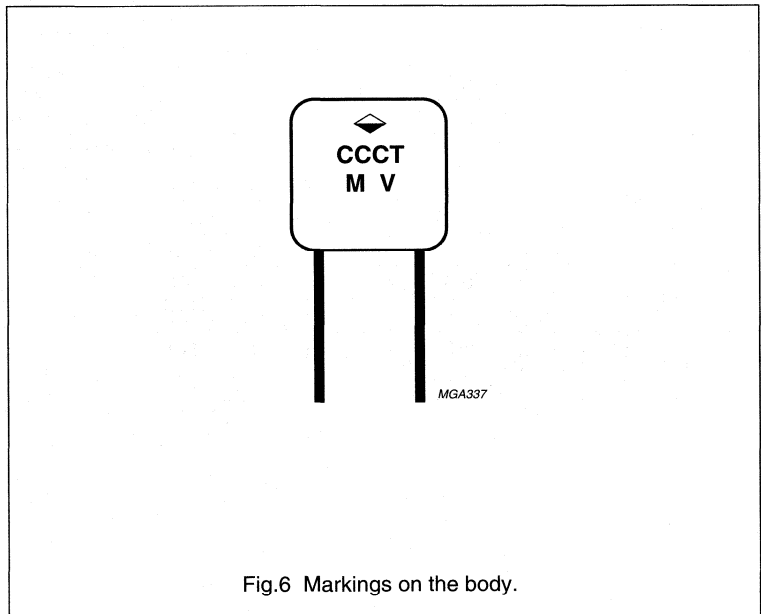


Fig.6 Markings on the body.

- (1) 100 pF and above in size code 15 are marked without capacitance tolerance code (T).
- (2) Only size code 30 and above are marked with the material code (M) and voltage code (V).

PACKAGING

For details refer to this handbook, Section "Leaded ceramic multilayer capacitors", Chapter "Packaging".

Leaded ceramic multilayer capacitors

Mono-kap™ series

ORDERING INFORMATION (preferred types)

Table 2 Capacitance, rated voltage, mechanical dimensions and ordering information; note 1

C	U _{R(DC)} (V)	LEAD SPACING	SIZE CODE	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽²⁾⁽³⁾
				13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
NP0 (C0G) ±5% tolerance								
10 pF	50	5.0	15	K100J15C0GF5.H5	10	12	08	2252 305..109
		2.5		K100J15C0GF5.L2	02	03	00	2252 305..109
	100	5.0	15	K100J15C0GH5.H5	10	12	08	2252 306..109
		2.5		K100J15C0GH5.L2	02	03	00	2252 306..109
12 pF	50	5.0	15	K120J15C0GF5.H5	10	12	08	2252 305..129
		2.5		K120J15C0GF5.L2	02	03	00	2252 305..129
15 pF	50	5.0	15	K150J15C0GF5.H5	10	12	08	2252 305..159
		2.5		K150J15C0GF5.L2	02	03	00	2252 305..159
18 pF	50	5.0	15	K180J15C0GF5.H5	10	12	08	2252 305..189
		2.5		K180J15C0GF5.L2	02	03	00	2252 305..189
22 pF	50	5.0	15	K220J15C0GF5.H5	10	12	08	2252 305..229
		2.5		K220J15C0GF5.L2	02	03	00	2252 305..229
	100	5.0	15	K220J15C0GH5.H5	10	12	08	2252 306..229
		2.5		K220J15C0GH5.L2	02	03	00	2252 306..229
27 pF	50	5.0	15	K270J15C0GF5.H5	10	12	08	2252 305..279
		2.5		K270J15C0GF5.L2	02	03	00	2252 305..279
33 pF	50	5.0	15	K330J15C0GF5.H5	10	12	08	2252 305..339
		2.5		K330J15C0GF5.L2	02	03	00	2252 305..339
39 pF	50	5.0	15	K390J15C0GF5.H5	10	12	08	2252 305..399
		2.5		K390J15C0GF5.L2	02	03	00	2252 305..399
47 pF	50	5.0	15	K470J15C0GF5.H5	10	12	08	2252 305..479
		2.5		K470J15C0GF5.L2	02	03	00	2252 305..479
	100	5.0	15	K470J15C0GH5.H5	10	12	08	2252 306..479
		2.5		K470J15C0GH5.L2	02	03	00	2252 306..479
56 pF	50	5.0	15	K560J15C0GF5.H5	10	12	08	2252 305..569
		2.5		K560J15C0GF5.L2	02	03	00	2252 305..569
68 pF	50	5.0	15	K680J15C0GF5.H5	10	12	08	2252 305..689
		2.5		K680J15C0GF5.L2	02	03	00	2252 305..689
82 pF	50	5.0	15	K820J15C0GF5.H5	10	12	08	2252 305..829
		2.5		K820J15C0GF5.L2	02	03	00	2252 305..829

Leaded ceramic multilayer capacitors

Mono-kap™ series

C	U _{R(DC)} (V)	LEAD SPACING	SIZE CODE	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽²⁾⁽³⁾
				13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
100 pF	50	5.0	15	K101J15C0GF5.H5	10	12	08	2252 305..101
		2.5		K101J15C0GF5.L2	02	03	00	2252 305..101
	100	5.0	15	K101J15C0GH5.H5	10	12	08	2252 306..101
		2.5		K101J15C0GH5.L2	02	03	00	2252 306..101
150 pF	50	5.0	15	K151J15C0GF5.H5	10	12	08	2252 305..151
		2.5		K151J15C0GF5.L2	02	03	00	2252 305..151
220 pF	50	5.0	15	K221J15C0GF5.H5	10	12	08	2252 305..221
		2.5		K221J15C0GF5.L2	02	03	00	2252 305..221
	100	5.0	15	K221J15C0GH5.H5	10	12	08	2252 306..221
		2.5		K221J15C0GH5.L2	02	03	00	2252 306..221
330 pF	50	5.0	15	K331J15C0GF5.H5	10	12	08	2252 305..331
		2.5		K331J15C0GF5.L2	02	03	00	2252 305..331
470 pF	50	5.0	15	K471J15C0GF5.H5	10	12	08	2252 305..471
		2.5		K471J15C0GF5.L2	02	03	00	2252 305..471
	100	5.0	15	K471J15C0GH5.H5	10	12	08	2252 306..471
		2.5		K471J15C0GH5.L2	02	03	00	2252 306..471
680 pF	50	5.0	15	K681J15C0GF5.H5	10	12	08	2252 305..681
		2.5		K681J15C0GF5.L2	02	03	00	2252 305..681
1000 pF	50	5.0	15	K102J15C0GF5.H5	10	12	08	2252 305..102
		2.5		K102J15C0GF5.L2	02	03	00	2252 305..102
	100	5.0	20	K102J20C0GH5.H5	24	26	22	2252 306..102
		2.5		K102J20C0GH5.L2	16	17	14	2252 306..102
1500 pF	50	5.0	20	K152J20C0GF5.H5	24	26	22	2252 305..152
2200 pF	50	5.0	20	K222J20C0GF5.H5	24	26	22	2252 305..222
3300 pF	50	5.0	20	K332J20C0GF5.H5	24	26	22	2252 305..332
4700 pF	50	5.0	20	K472J20C0GF5.H5	24	26	22	2252 305..472
6800 pF	50	5.0	30	K682J30C0GF5.H5	48	50	46	2252 305..682
0.01 μF	50	5.0	30	K103J30C0GF5.H5	48	50	46	2252 305..103

Leaded ceramic multilayer capacitors

Mono-kap™ series

C	U _{R(DC)} (V)	LEAD SPACING	SIZE CODE	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽²⁾⁽³⁾
				13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
X7R ±10% tolerance								
220 pF	50	5.0	15	K221K15X7RF5.H5	10	12	08	2252 325..221
		2.5		K221K15X7RF5.L2	02	03	00	2252 325..221
	100	5.0	15	K221K15X7RH5.H5	10	12	08	2252 326..221
		2.5		K221K15X7RH5.L2	02	03	00	2252 326..221
330 pF	50	5.0	15	K331K15X7RF5.H5	10	12	08	2252 325..331
		2.5		K331K15X7RF5.L2	02	03	00	2252 325..331
470 pF	50	5.0	15	K471K15X7RF5.H5	10	12	08	2252 325..471
		2.5		K471K15X7RF5.L2	02	03	00	2252 325..471
	100	5.0	15	K471K15X7RH5.H5	10	12	08	2252 326..471
		2.5		K471K15X7RH5.L2	02	03	00	2252 326..471
680 pF	50	5.0	15	K681K15X7RF5.H5	10	12	08	2252 325..681
		2.5		K681K15X7RF5.L2	02	03	00	2252 325..681
1000 pF	50	5.0	15	K102K15X7RF5.H5	10	12	08	2252 325..102
		2.5		K102K15X7RF5.L2	02	03	00	2252 325..102
	100	5.0	15	K102K15X7RH5.H5	10	12	08	2252 326..102
		2.5		K102K15X7RH5.L2	02	03	00	2252 326..102
1500 pF	50	5.0	15	K152K15X7RF5.H5	10	12	08	2252 325..152
		2.5		K152K15X7RF5.L2	02	03	00	2252 325..152
2200 pF	50	5.0	15	K222K15X7RF5.H5	10	12	08	2252 325..222
		2.5		K222K15X7RF5.L2	02	03	00	2252 325..222
	100	5.0	15	K222K15X7RH5.H5	10	12	08	2252 326..222
		2.5		K222K15X7RH5.L2	02	03	00	2252 326..222
3300 pF	50	5.0	15	K332K15X7RF5.H5	10	12	08	2252 325..332
		2.5		K332K15X7RF5.L2	02	03	00	2252 325..332
4700 pF	50	5.0	15	K472K15X7RF5.H5	10	12	08	2252 325..472
		2.5		K472K15X7RF5.L2	02	03	00	2252 325..472
	100	5.0	15	K472K15X7RH5.H5	10	12	08	2252 326..472
		2.5		K472K15X7RH5.L2	02	03	00	2252 326..472
6800 pF	50	5.0	15	K682K15X7RF5.H5	10	12	08	2252 325..682
		2.5		K682K15X7RF5.L2	02	03	00	2252 325..682
0.01 µF	50	5.0	15	K103K15X7RF5.H5	10	12	08	2252 325..103
		2.5		K103K15X7RF5.L2	02	03	00	2252 325..103
	100	5.0	15	K103K15X7RH5.H5	10	12	08	2252 326..103
		2.5		K103K15X7RH5.L2	02	03	00	2252 326..103
0.015 µF	50	5.0	15	K153K15X7RF5.H5	10	12	08	2252 325..153
		2.5		K153K15X7RF5.L2	02	03	00	2252 325..153

Leaded ceramic multilayer capacitors

Mono-kap™ series

C	U _{R(DC)} (V)	LEAD SPACING	SIZE CODE	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽²⁾⁽³⁾
				13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
0.022 µF	50	5.0	15	K223K15X7RF5.H5	10	12	08	2252 325..223
		2.5		K223K15X7RF5.L2	02	03	00	2252 325..223
	100	5.0	20	K223K20X7RH5.H5	24	26	22	2252 326..223
		2.5		K223K20X7RH5.L2	16	17	14	2252 326..223
0.033 µF	50	5.0	15	K333K15X7RF5.H5	10	12	08	2252 325..333
		2.5		K333K15X7RF5.L2	02	03	00	2252 325..333
0.047 µF	50	5.0	15	K473K15X7RF5.H5	10	12	08	2252 325..473
		2.5		K473K15X7RF5.L2	02	03	00	2252 325..473
	100	5.0	20	K473K20X7RH5.H5	24	26	22	2252 326..473
		2.5		K473K20X7RH5.L2	16	17	14	2252 326..473
0.068 µF	50	5.0	20	K683K20X7RF5.H5	24	26	22	2252 325..683
		2.5		K683K20X7RF5.L2	16	17	14	2252 325..683
0.1 µF	50	5.0	20	K104K20X7RF5.H5	24	26	22	2252 325..104
		2.5		K104K20X7RF5.L2	16	17	14	2252 325..104
	100	5.0	20	K104K20X7RH5.H5	24	26	22	2252 326..104
		2.5		K104K20X7RH5.L2	16	17	14	2252 326..104
0.15 µF	50	5.0	20	K154K20X7RF5.H5	24	26	22	2252 325..154
0.22 µF	50	5.0	20	K224K20X7RF5.H5	24	26	22	2252 325..224
0.33 µF	50	5.0	30	K334K30X7RF5.H5	48	50	46	2252 325..334
0.47 µF	50	5.0	30	K474K30X7RF5.H5	48	50	46	2252 325..474
0.68 µF	50	5.0	30	K684K30X7RF5.H5	48	50	46	2252 325..684
1.0 µF	50	5.0	30	K105K30X7RF5.H5	48	50	46	2252 325..105
Z5U ±20% tolerance								
0.01 µF	50	5.0	15	K103M15Z5UF5.H5	10	12	08	2252 345..103
		2.5		K103M15Z5UF5.L2	02	03	00	2252 345..103
	100	5.0	15	K103M15Z5UH5.H5	10	12	08	2252 346..103
		2.5		K103M15Z5UH5.L2	02	03	00	2252 346..103
0.022 µF	50	5.0	15	K223M15Z5UF5.H5	10	12	08	2252 345..223
		2.5		K223M15Z5UF5.L2	02	03	00	2252 345..223
0.047 µF	50	5.0	15	K473M15Z5UF5.H5	10	12	08	2252 345..473
		2.5		K473M15Z5UF5.L2	02	03	00	2252 345..473

Leaded ceramic multilayer capacitors

Mono-kap™ series

C	U _{R(DC)} (V)	LEAD SPACING	SIZE CODE	CLEAR TEXT CODE	PACKAGING CODE 8 th AND 9 th DIGIT			CATALOGUE NUMBER ⁽²⁾ / ₍₃₎
				13 th DIGIT: T = REEL; U = AMMO; 3 = BULK	REEL	AMMO	BULK	
0.1 µF	50	5.0	15	K104M15Z5UF5.H5	10	12	08	2252 345..104
		2.5		K104M15Z5UF5.L2	02	03	00	2252 345..104
	100	5.0	20	K104M20Z5UH5.H5	24	26	22	2252 346..104
		2.5		K104M20Z5UH5.L2	16	17	14	2252 346..104
0.15 µF	50	5.0	15	K154M15Z5UF5.H5	10	12	08	2252 345..154
		2.5		K154M15Z5UF5.L2	02	03	00	2252 345..154
0.22 µF	50	5.0	15	K224M15Z5UF5.H5	10	12	08	2252 345..224
		2.5		K224M15Z5UF5.L2	02	03	00	2252 345..224
0.33 µF	50	5.0	20	K334M20Z5UF5.H5	24	26	22	2252 345..334
0.47 µF	50	5.0	20	K474M20Z5UF5.H5	24	26	22	2252 345..474
0.68 µF	50	5.0	30	K684M30Z5UF5.H5	48	50	46	2252 345..684
1.0 µF	50	5.0	30	K105M30Z5UF5.H5	48	50	46	2252 345..105
Y5V +80/-20% tolerance								
0.1 µF	25	5.0	15	K104Z15Y5VE5.H5	10	12	08	2252 362..104
		2.5		K104Z15Y5VE5.L2	02	03	00	2252 362..104
	50	5.0	15	K104Z15Y5VF5.H5	10	12	08	2252 365..104
		2.5		K104Z15Y5VF5.L2	02	03	00	2252 365..104
0.22 µF	25	5.0	15	K224Z15Y5VE5.H5	10	12	08	2252 362..224
		2.5		K224Z15Y5VE5.L2	02	03	00	2252 362..224
	50	5.0	15	K224Z15Y5VF5.H5	10	12	08	2252 365..224
		2.5		K224Z15Y5VF5.L2	02	03	00	2252 365..224
0.47 µF	25	5.0	20	K474Z20Y5VE5.H5	24	26	22	2252 362..474
		2.5		K474Z20Y5VE5.L2	16	17	14	2252 362..474
	50	5.0	20	K474Z20Y5VF5.H5	24	26	22	2252 365..474
		2.5		K474Z20Y5VF5.L2	16	17	14	2252 365..474
1.0 µF	25	5.0	20	K105Z20Y5VE5.H5	24	26	22	2252 362..105
		2.5		K105Z20Y5VE5.L2	16	17	14	2252 362..105
	50	5.0	20	K105Z20Y5VF5.H5	24	26	22	2252 365..105
		2.5		K105Z20Y5VF5.L2	16	17	14	2252 365..105

Notes

1. For maximum thickness refer to Table 1.
2. 8th and 9th digit of the catalogue number to be completed with the packaging code.
3. Packaging codes refer to straight leads for F = 2.5 mm and flat bent leads for F = 5.0 mm.
Other styles available on request.

Leaded ceramic multilayer capacitors

Mono-kap™ series

ELECTRICAL CHARACTERISTICS**Table 3** Electrical data for NP0, X7R, Z5U and Y5V; also conditions for Tables 5, 6 and 7

The capacitors meet the essential requirements of "IEC 384-8", "IEC 384-9" and "EIA198".

Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at barometric pressures of 650 to 800 mm of mercury, and relative humidity not to exceed 75%.

DESCRIPTION	VALUE
Capacitors with temperature coefficient NP0	
Capacitance range:	
at 1 MHz, 1 V; where $C \leq 1000$ pF	10 to 1000 pF
at 1 kHz, 1 V; where $C > 1000$ pF	1200 pF to 0.01 μ F
Tolerance on the capacitance	$\pm 5\%$, $\pm 10\%$
Rated DC voltage	50 and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	100000 M Ω or 1000 M $\Omega \times \mu$ F, whichever is less at 25 °C
Temperature coefficient of the capacitance	$0 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Dissipation factor:	
at 1 MHz, 1 V; where $C \leq 30$ pF	$< \frac{1}{(400 + 20 \times C)}$
at 1 kHz, 1 V; where $C > 30$ pF	$< 15 \times 10^{-4}$
Operating temperature range	-55 to +125 °C
Storage temperature range	-55 to +85 °C
Capacitors with temperature coefficient X7R	
Capacitance range at 1 kHz, 1 V	100 pF to 1.0 μ F
Tolerance on the capacitance	$\pm 10\%$, $\pm 20\%$
Maximum capacitance variation with respect to capacitance value at 25 °C	$\pm 15\%$
Rated DC voltage	50 and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	100000 M Ω or 1000 M $\Omega \times \mu$ F, whichever is less at 25 °C
Dissipation factor at 1 kHz, 1 V	$\leq 2.5\%$
Operating temperature range	-55 to +125 °C
Storage temperature range	-55 to +85 °C
Ageing	typical 1% per time decade

Leaded ceramic multilayer capacitors

Mono-kap™ series

DESCRIPTION	VALUE
Capacitors with temperature coefficient Z5U	
Capacitance range at 1 kHz, 0.5 V	1000 pF to 2.2 μ F
Tolerance on the capacitance	$\pm 20\%$, $+80\%$ / -20%
Maximum capacitance variation with respect to capacitance value at 25 °C	-56% / $+22\%$
Rated DC voltage	50 and 100 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	10000 M Ω or 1000 M Ω \times μ F, whichever is less at 25 °C
Dissipation factor at 1 kHz, 0.5 V	$\leq 4\%$
Operating temperature range	10 to 85 °C
Storage temperature range	-55 to $+85$ °C
Ageing	typical 6% per time decade
Capacitors with temperature coefficient Y5V	
Capacitance range at 1 kHz, 1 V	0.01 to 1.0 μ F
Tolerance on the capacitance	$+80\%$ / -20%
Maximum capacitance variation with respect to capacitance value at 25 °C	-82% / $+22\%$
Rated DC voltage	25 and 50 V
Dielectric strength	250% of rated voltage
Insulation resistance at rated voltage	10000 M Ω or 1000 M Ω \times μ F, whichever is less at 25 °C
Dissipation factor at 1 kHz, 1 V	$\leq 5\%$
Operating temperature range	10 to 85 °C
Storage temperature range	-55 to $+85$ °C
Ageing	typical 6% per time decade

Leaded ceramic multilayer capacitors

Mono-kap™ series

CROSS REFERENCE INFORMATION FOR 2222 SERIES

Table 4 Catalogue numbers for 2222 series; see Tables 5, 6 and 7

CAP. TOL.	PITCH ⁽²⁾ P (mm)	LEAD ⁽²⁾ DIA. d (mm)	CATALOGUE NUMBER 2222 73. ⁽¹⁾								
			BULK PACKED			ON TAPE ON REEL			ON TAPE IN AMMOPACK		
			U _R (DC)		Fig.	U _R (DC)		Fig.	U _R (DC)		Fig.
			50 V	100 V		50 V	100 V		50 V	100 V	
±5%	2.54 (0.1); note 3	0.5 (0.020)	05...	37...	2	09...	41...	4	13...	45...	4
±10%			06...	38...	2	10...	42...	4	14...	46...	4
±20%			07...	39...	2	11...	43...	4	15...	47...	4
+80%/-20%			08...	40...	2	12...	44...	4	16...	48...	4
±5%	5.08 (0.2)	0.5 (0.020)	17...	49...	3	21...	53...	3	25...	57...	3
±10%			18...	50...	3	22...	54...	3	26...	58...	3
±20%			19...	51...	3	23...	55...	3	27...	59...	3
+80%/-20%			20....	52...	3	24...	56...	3	28...	60...	3

Notes

1. Catalogue numbers to be completed by adding the 7th digit for the required dielectric and the last 3 digits for the required series and capacitance (see Tables 5, 6 and 7).
2. Dimensions between the parentheses are in inches.
3. Sizes 15 and 20 only.

Leaded ceramic multilayer capacitors

Mono-kap™ series

Table 5 Range of values for **NPO (COG)**, 2222 730; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	$U_R = 50 \text{ V (DC)}$	$U_R = 100 \text{ V (DC)}$	
10	15	15	..109
12	15	15	..129
15	15	15	..159
18	15	15	..189
22	15	15	..229
27	15	15	..279
33	15	15	..339
39	15	15	..399
47	15	15	..479
56	15	15	..569
68	15	15	..689
82	15	15	..829
100	15	15	..101
120	15	15	..121
150	15	15	..151
180	15	15	..181
220	15	15	..221
270	15	15	..271
330	15	15	..331
390	15	15	..391
470	15	15	..471
560	15	15	..561
680	15	15	..681
820	15	15	..821
1000	15	20	..102
1200	20	20	..122
1500	20	20	..152
1800	20	20	..182
2200	20	20	..222
2700	20	20	..272
3300	20	20	..332
3900	20	20	..392
4700	20	20	..472
5600	30	30	..562
6800	30	30	..682
8200	30	30	..822
10000	30	30	..103
12000	30	–	..123
15000	30	–	...153
18000	30	–	..183
22000	30	–	..223

Leaded ceramic multilayer capacitors

Mono-kap™ series

Table 6 Range of values for X7R, 2222 731; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	U _R = 50 V (DC)	U _R = 100 V (DC)	
220	15	15	..221
270	15	15	..271
330	15	15	..331
390	15	15	..391
470	15	15	..471
560	15	15	..561
680	15	15	..681
820	15	15	..821
1 000	15	15	..102
1 200	15	15	..122
1 500	15	15	..152
1 800	15	15	..182
2 200	15	15	..222
2 700	15	15	..272
3 300	15	15	..332
3 900	15	15	..392
4 700	15	15	..472
5 600	15	15	..562
6 800	15	15	..682
8 200	15	15	..822
10 000	15	15	..103
12 000	15	20	..123
15 000	15	20	...153
18 000	15	20	..183
22 000	15	20	..223
27 000	15	20	..273
33 000	15	20	..333
39 000	15	20	..393
47 000	15	20	..473
56 000	20	20	..563
68 000	20	20	..683
82 000	20	20	..823
100 000	20	20	..104
120 000	20	30	..124
150 000	20	30	..154
180 000	20	30	..184
220 000	20	30	..224
270 000	30	30	..274

Leaded ceramic multilayer capacitors

Mono-kap™ series

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	$U_R = 50 \text{ V (DC)}$	$U_R = 100 \text{ V (DC)}$	
330000	30	30	..334
390000	30	–	..394
470000	30	–	..474
560000	30	–	..564
680000	30	–	..684
820000	30	–	..824
1000000	30	–	..105

Leaded ceramic multilayer capacitors

Mono-kap™ series

Table 7 Range of values for **Z5U**, 2222 733; see Table 3 for conditions

CAPACITANCE VALUE (pF)	SIZE (see Table 1)		SUFFIX OF CATALOGUE NUMBER (see Table 4)
	U _R = 50 V (DC)	U _R = 100 V (DC)	
1000	15	15	..102
1200	15	15	..122
1500	15	15	..152
1800	15	15	..182
2200	15	15	..222
2700	15	15	..272
3300	15	15	..332
3900	15	15	..392
4700	15	15	..472
5600	15	15	..562
6800	15	15	..682
8200	15	15	..822
10000	15	15	..103
12000	15	20	..123
15000	15	20	..153
18000	15	20	..183
22000	15	20	..223
27000	15	20	..273
33000	15	20	..333
39000	15	20	..393
47000	15	20	..473
56000	15	20	..563
68000	15	20	..683
82000	15	20	..823
100000	15	20	..104
120000	15	30	..124
150000	15	30	..154
180000	15	30	..184
220000	15	30	..224
270000	20	30	..274
330000	20	30	..334
390000	20	30	..394
470000	20	30	..474
560000	30	–	..564
680000	30	–	..684
820000	30	–	..824
1000000	30	–	..105

Leaded ceramic multilayer capacitors

Cross reference
selection guide

Table 1 Mono-kap™ conformal radials NP0 (C0G), 5% and 10% tolerance, 50 V

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 C 100 J	K 100 J 15 C0G F VB	2222 730 05109	2.54
CN 15 C 100 K	K 100 K 15 C0G F VB	2222 730 06109	2.54
CN 15 C 120 J	K 120 J 15 C0G F VB	2222 730 05129	2.54
CN 15 C 120 K	K 120 K 15 C0G F VB	2222 730 06129	2.54
CN 15 C 150 J	K 150 J 15 C0G F VB	2222 730 05159	2.54
CN 15 C 150 K	K 150 K 15 C0G F VB	2222 730 06159	2.54
CN 15 C 180 J	K 180 J 15 C0G F VB	2222 730 05189	2.54
CN 15 C 180 K	K 180 K 15 C0G F VB	2222 730 06189	2.54
CN 15 C 220 J	K 220 J 15 C0G F VB	2222 730 05229	2.54
CN 15 C 220 K	K 220 K 15 C0G F VB	2222 730 06229	2.54
CN 15 C 270 J	K 270 J 15 C0G F VB	2222 730 05279	2.54
CN 15 C 270 K	K 270 K 15 C0G F VB	2222 730 06279	2.54
CN 15 C 330 J	K 330 J 15 C0G F VB	2222 730 05339	2.54
CN 15 C 330 K	K 330 K 15 C0G F VB	2222 730 06339	2.54
CN 15 C 390 J	K 390 J 15 C0G F VB	2222 730 05399	2.54
CN 15 C 390 K	K 390 K 15 C0G F VB	2222 730 06399	2.54
CN 15 C 470 J	K 470 J 15 C0G F VB	2222 730 05479	2.54
CN 15 C 470 K	K 470 K 15 C0G F VB	2222 730 06479	2.54
CN 15 C 560 J	K 560 J 15 C0G F VB	2222 730 05569	2.54
CN 15 C 560 K	K 560 K 15 C0G F VB	2222 730 06569	2.54
CN 15 C 680 J	K 680 J 15 C0G F VB	2222 730 05689	2.54
CN 15 C 680 K	K 680 K 15 C0G F VB	2222 730 06689	2.54
CN 15 C 820 J	K 820 J 15 C0G F VB	2222 730 05829	2.54
CN 15 C 820 K	K 820 K 15 C0G F VB	2222 730 06829	2.54
CN 15 C 101 J	K 101 J 15 C0G F VB	2222 730 05101	2.54
CN 15 C 101 K	K 101 K 15 C0G F VB	2222 730 06101	2.54
CN 15 C 121 J	K 121 J 15 C0G F VB	2222 730 05121	2.54
CN 15 C 121 K	K 121 K 15 C0G F VB	2222 730 06121	2.54
CN 15 C 151 J	K 151 J 15 C0G F VB	2222 730 05151	2.54
CN 15 C 151 K	K 151 K 15 C0G F VB	2222 730 06151	2.54
CN 15 C 181 J	K 181 J 15 C0G F VB	2222 730 05181	2.54
CN 15 C 181 K	K 181 K 15 C0G F VB	2222 730 06181	2.54
CN 15 C 221 J	K 221 J 15 C0G F VB	2222 730 05221	2.54
CN 15 C 221 K	K 221 K 15 C0G F VB	2222 730 06221	2.54
CN 15 C 271 J	K 271 J 15 C0G F VB	2222 730 05271	2.54
CN 15 C 271 K	K 271 K 15 C0G F VB	2222 730 06271	2.54
CN 15 C 331 J	K 331 J 15 C0G F VB	2222 730 05331	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 C 331 K	K 331 K 15 C0G F VB	2222 730 06331	2.54
CN 15 C 391 J	K 391 J 15 C0G F VB	2222 730 05391	2.54
CN 15 C 391 K	K 391 K 15 C0G F VB	2222 730 06391	2.54
CN 15 C 471 J	K 471 J 15 C0G F VB	2222 730 05471	2.54
CN 15 C 471 K	K 471 K 15 C0G F VB	2222 730 06471	2.54
CN 15 C 561 J	K 561 J 15 C0G F VB	2222 730 05561	2.54
CN 15 C 561 K	K 561 K 15 C0G F VB	2222 730 06561	2.54
CN 20 C 681 J	K 681 J 15 C0G F VB	2222 730 05681	2.54
CN 20 C 681 K	K 681 K 15 C0G F VB	2222 730 06681	2.54
CN 20 C 821 J	K 821 J 15 C0G F VB	2222 730 05821	2.54
CN 20 C 821 K	K 821 K 15 C0G F VB	2222 730 06821	2.54
CN 20 C 102 J	K 102 J 15 C0G F VB	2222 730 05102	2.54
CN 20 C 102 K	K 102 K 15 C0G F VB	2222 730 06102	2.54
CN 20 C 122 J	K 122 J 20 C0G F VB	2222 730 05122	2.54
CN 20 C 122 K	K 122 K 20 C0G F VB	2222 730 06122	2.54
CN 20 C 152 J	K 152 J 20 C0G F VB	2222 730 05152	2.54
CN 20 C 152 K	K 152 K 20 C0G F VB	2222 730 06152	2.54
CN 20 C 182 J	K 182 J 20 C0G F VB	2222 730 05182	2.54
CN 20 C 182 K	K 182 K 20 C0G F VB	2222 730 06182	2.54
CN 20 C 222 J	K 222 J 20 C0G F VB	2222 730 05222	2.54
CN 20 C 222 K	K 222 K 20 C0G F VB	2222 730 06222	2.54
CN 20 C 272 J	K 272 J 20 C0G F VB	2222 730 05272	2.54
CN 20 C 272 K	K 272 K 20 C0G F VB	2222 730 06272	2.54
CN 20 C 332 J	K 332 J 20 C0G F VB	2222 730 05332	2.54
CN 20 C 332 K	K 332 K 20 C0G F VB	2222 730 06332	2.54
CN 30 C 392 J	K 392 J 20 C0G F VC	2222 730 17392	5.08
CN 30 C 392 K	K 392 K 20 C0G F VC	2222 730 18392	5.08
CN 30 C 472 J	K 472 J 20 C0G F VC	2222 730 17472	5.08
CN 30 C 472 K	K 472 K 20 C0G F VC	2222 730 18472	5.08
CN 30 C 562 J	K 562 J 30 C0G F VC	2222 730 17562	5.08
CN 30 C 562 K	K 562 K 30 C0G F VC	2222 730 18562	5.08
CN 30 C 682 J	K 682 J 30 C0G F VC	2222 730 17682	5.08
CN 30 C 682 K	K 682 K 30 C0G F VC	2222 730 18682	5.08
CN 30 C 822 K	K 822 K 30 C0G F VC	2222 730 18822	5.08
CN 30 C 103 J	K 103 J 30 C0G F VC	2222 730 17103	5.08
CN 30 C 103 K	K 103 K 30 C0G F VC	2222 730 18103	5.08
CN 40 C 153 J	K 153 J 30 C0G F VC	2222 730 17153	5.08
CN 40 C 153 K	K 153 K 30 C0G F VC	2222 730 18153	5.08
CN 40 C 223 J	K 223 J 30 C0G F VC	2222 730 17223	5.08
CN 40 C 223 K	K 223 K 30 C0G F VC	2222 730 18223	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 C 100 J DRM	K 100 J 15 C0G F TT	2222 730 21109	5.08
CN 15 C 100 K DRM	K 100 K 15 C0G F TT	2222 730 22109	5.08
CN 15 C 120 J DRM	K 120 J 15 C0G F TT	2222 730 21129	5.08
CN 15 C 120 K DRM	K 120 K 15 C0G F TT	2222 730 22129	5.08
CN 15 C 150 J DRM	K 150 J 15 C0G F TT	2222 730 21159	5.08
CN 15 C 150 K DRM	K 150 K 15 C0G F TT	2222 730 22159	5.08
CN 15 C 180 J DRM	K 180 J 15 C0G F TT	2222 730 21189	5.08
CN 15 C 180 K DRM	K 180 K 15 C0G F TT	2222 730 22189	5.08
CN 15 C 220 J DRM	K 220 J 15 C0G F TT	2222 730 21229	5.08
CN 15 C 220 K DRM	K 220 K 15 C0G F TT	2222 730 22229	5.08
CN 15 C 270 J DRM	K 270 J 15 C0G F TT	2222 730 21279	5.08
CN 15 C 270 K DRM	K 270 K 15 C0G F TT	2222 730 22279	5.08
CN 15 C 330 J DRM	K 330 J 15 C0G F TT	2222 730 21339	5.08
CN 15 C 330 K DRM	K 330 K 15 C0G F TT	2222 730 22339	5.08
CN 15 C 390 J DRM	K 390 J 15 C0G F TT	2222 730 21399	5.08
CN 15 C 390 K DRM	K 390 K 15 C0G F TT	2222 730 22399	5.08
CN 15 C 470 J DRM	K 470 J 15 C0G F TT	2222 730 21479	5.08
CN 15 C 470 K DRM	K 470 K 15 C0G F TT	2222 730 22479	5.08
CN 15 C 560 J DRM	K 560 J 15 C0G F TT	2222 730 21569	5.08
CN 15 C 560 K DRM	K 560 K 15 C0G F TT	2222 730 22569	5.08
CN 15 C 680 J DRM	K 680 J 15 C0G F TT	2222 730 21689	5.08
CN 15 C 680 K DRM	K 680 K 15 C0G F TT	2222 730 22689	5.08
CN 15 C 820 J DRM	K 820 J 15 C0G F TT	2222 730 21829	5.08
CN 15 C 820 K DRM	K 820 K 15 C0G F TT	2222 730 22829	5.08
CN 15 C 101 J DRM	K 101 J 15 C0G F TT	2222 730 21101	5.08
CN 15 C 101 K DRM	K 101 K 15 C0G F TT	2222 730 22101	5.08
CN 15 C 121 J DRM	K 121 J 15 C0G F TT	2222 730 21121	5.08
CN 15 C 121 K DRM	K 121 K 15 C0G F TT	2222 730 22121	5.08
CN 15 C 151 J DRM	K 151 J 15 C0G F TT	2222 730 21151	5.08
CN 15 C 151 K DRM	K 151 K 15 C0G F TT	2222 730 22151	5.08
CN 15 C 181 J DRM	K 181 J 15 C0G F TT	2222 730 21181	5.08
CN 15 C 181 K DRM	K 181 K 15 C0G F TT	2222 730 22181	5.08
CN 15 C 221 J DRM	K 221 J 15 C0G F TT	2222 730 21221	5.08
CN 15 C 221 K DRM	K 221 K 15 C0G F TT	2222 730 22221	5.08
CN 15 C 271 J DRM	K 271 J 15 C0G F TT	2222 730 21271	5.08
CN 15 C 271 K DRM	K 271 K 15 C0G F TT	2222 730 22271	5.08
CN 15 C 331 J DRM	K 331 J 15 C0G F TT	2222 730 21331	5.08
CN 15 C 331 K DRM	K 331 K 15 C0G F TT	2222 730 22331	5.08
CN 15 C 391 J DRM	K 391 J 15 C0G F TT	2222 730 21391	5.08
CN 15 C 391 K DRM	K 391 K 15 C0G F TT	2222 730 22391	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 C 471 J DRM	K 471 J 15 C0G F TT	2222 730 21471	5.08
CN 15 C 471 K DRM	K 471 K 15 C0G F TT	2222 730 22471	5.08
CN 15 C 561 J DRM	K 561 J 15 C0G F TT	2222 730 21561	5.08
CN 15 C 561 K DRM	K 561 K 15 C0G F TT	2222 730 22561	5.08
CN 20 C 681 J DRM	K 681 J 15 C0G F TT	2222 730 21681	5.08
CN 20 C 681 K DRM	K 681 K 15 C0G F TT	2222 730 22681	5.08
CN 20 C 821 J DRM	K 821 J 15 C0G F TT	2222 730 21821	5.08
CN 20 C 821 K DRM	K 821 K 15 C0G F TT	2222 730 22821	5.08
CN 20 C 102 J DRM	K 102 J 15 C0G F TT	2222 730 21102	5.08
CN 20 C 102 K DRM	K 102 K 15 C0G F TT	2222 730 22102	5.08
CN 20 C 122 J DRM	K 122 J 20 C0G F TT	2222 730 21122	5.08
CN 20 C 122 K DRM	K 122 K 20 C0G F TT	2222 730 22122	5.08
CN 20 C 152 J DRM	K 152 J 20 C0G F TT	2222 730 21152	5.08
CN 20 C 152 K DRM	K 152 K 20 C0G F TT	2222 730 22152	5.08
CN 20 C 182 J DRM	K 182 J 20 C0G F TT	2222 730 21182	5.08
CN 20 C 182 K DRM	K 182 K 20 C0G F TT	2222 730 22182	5.08
CN 20 C 222 J DRM	K 222 J 20 C0G F TT	2222 730 21222	5.08
CN 20 C 222 K DRM	K 222 K 20 C0G F TT	2222 730 22222	5.08
CN 20 C 272 J DRM	K 272 J 20 C0G F TT	2222 730 21272	5.08
CN 20 C 272 K DRM	K 272 K 20 C0G F TT	2222 730 22272	5.08
CN 20 C 332 J DRM	K 332 J 20 C0G F TT	2222 730 21332	5.08
CN 20 C 332 K DRM	K 332 K 20 C0G F TT	2222 730 22332	5.08
CN 30 C 392 J DRM	K 392 J 20 C0G F TT	2222 730 21392	5.08
CN 30 C 392 K DRM	K 392 K 20 C0G F TT	2222 730 22392	5.08
CN 30 C 472 J DRM	K 472 J 20 C0G F TT	2222 730 21472	5.08
CN 30 C 472 K DRM	K 472 K 20 C0G F TT	2222 730 22472	5.08
CN 30 C 562 J DRM	K 562 J 30 C0G F TT	2222 730 21562	5.08
CN 30 C 562 K DRM	K 562 K 30 C0G F TT	2222 730 22562	5.08
CN 30 C 682 J DRM	K 682 J 30 C0G F TT	2222 730 21682	5.08
CN 30 C 682 K DRM	K 682 K 30 C0G F TT	2222 730 22682	5.08
CN 30 C 822 K DRM	K 822 K 30 C0G F TT	2222 730 22822	5.08
CN 30 C 103 J DRM	K 103 J 30 C0G F TT	2222 730 21103	5.08
CN 30 C 103 K DRM	K 103 K 30 C0G F TT	2222 730 22103	5.08
CN 40 C 153 J DRM	K 153 J 30 C0G F TT	2222 730 21153	5.08
CN 40 C 153 K DRM	K 153 K 30 C0G F TT	2222 730 22153	5.08
CN 40 C 223 J DRM	K 223 J 30 C0G F TT	2222 730 21223	5.08
CN 40 C 223 K DRM	K 223 K 30 C0G F TT	2222 730 22223	5.08

Note to Table 1

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Leaded ceramic multilayer capacitors

Cross reference
selection guide**Table 2** Mono-kap™ conformal radials **NP0 (C0G)**, 5% and 10% tolerance, **100 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 A 100 J	K 100 J 15 C0G H VB	2222 730 37109	2.54
CN 15 A 100 K	K 100 K 15 C0G H VB	2222 730 38109	2.54
CN 15 A 120 J	K 120 J 15 C0G H VB	2222 730 37129	2.54
CN 15 A 120 K	K 120 K 15 C0G H VB	2222 730 38129	2.54
CN 15 A 150 J	K 150 J 15 C0G H VB	2222 730 37159	2.54
CN 15 A 150 K	K 150 K 15 C0G H VB	2222 730 38159	2.54
CN 15 A 180 J	K 180 J 15 C0G H VB	2222 730 37189	2.54
CN 15 A 180 K	K 180 K 15 C0G H VB	2222 730 38189	2.54
CN 15 A 220 J	K 220 J 15 C0G H VB	2222 730 37229	2.54
CN 15 A 220 K	K 220 K 15 C0G H VB	2222 730 38229	2.54
CN 15 A 270 J	K 270 J 15 C0G H VB	2222 730 37279	2.54
CN 15 A 270 K	K 270 K 15 C0G H VB	2222 730 38279	2.54
CN 15 A 330 J	K 330 J 15 C0G H VB	2222 730 37339	2.54
CN 15 A 330 K	K 330 K 15 C0G H VB	2222 730 38339	2.54
CN 15 A 390 J	K 390 J 15 C0G H VB	2222 730 37399	2.54
CN 15 A 390 K	K 390 K 15 C0G H VB	2222 730 38399	2.54
CN 15 A 470 J	K 470 J 15 C0G H VB	2222 730 37479	2.54
CN 15 A 470 K	K 470 K 15 C0G H VB	2222 730 38479	2.54
CN 15 A 560 J	K 560 J 15 C0G H VB	2222 730 37569	2.54
CN 15 A 560 K	K 560 K 15 C0G H VB	2222 730 38569	2.54
CN 15 A 680 J	K 680 J 15 C0G H VB	2222 730 37689	2.54
CN 15 A 680 K	K 680 K 15 C0G H VB	2222 730 38689	2.54
CN 15 A 820 J	K 820 J 15 C0G H VB	2222 730 37829	2.54
CN 15 A 820 K	K 820 K 15 C0G H VB	2222 730 38829	2.54
CN 15 A 101 J	K 101 J 15 C0G H VB	2222 730 37101	2.54
CN 15 A 101 K	K 101 K 15 C0G H VB	2222 730 38101	2.54
CN 15 A 121 J	K 121 J 15 C0G H VB	2222 730 37121	2.54
CN 15 A 121 K	K 121 K 15 C0G H VB	2222 730 38121	2.54
CN 15 A 151 J	K 151 J 15 C0G H VB	2222 730 37151	2.54
CN 15 A 151 K	K 151 K 15 C0G H VB	2222 730 38151	2.54
CN 15 A 181 J	K 181 J 15 C0G H VB	2222 730 37181	2.54
CN 15 A 181 K	K 181 K 15 C0G H VB	2222 730 38181	2.54
CN 15 A 221 J	K 221 J 15 C0G H VB	2222 730 37221	2.54
CN 15 A 221 K	K 221 K 15 C0G H VB	2222 730 38221	2.54
CN 15 A 271 J	K 271 J 15 C0G H VB	2222 730 37271	2.54
CN 15 A 271 K	K 271 K 15 C0G H VB	2222 730 38271	2.54
CN 15 A 331 J	K 331 J 15 C0G H VB	2222 730 37331	2.54
CN 15 A 331 K	K 331 K 15 C0G H VB	2222 730 38331	2.54
CN 15 A 391 J	K 391 J 15 C0G H VB	2222 730 37391	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 A 391 K	K 391 K 15 C0G H VB	2222 730 38391	2.54
CN 20 A 471 J	K 471 J 15 C0G H VB	2222 730 37471	2.54
CN 20 A 471 K	K 471 K 15 C0G H VB	2222 730 38471	2.54
CN 20 A 561 J	K 561 J 15 C0G H VB	2222 730 37561	2.54
CN 20 A 561 K	K 561 K 15 C0G H VB	2222 730 38561	2.54
CN 20 A 681 J	K 681 J 15 C0G H VB	2222 730 37681	2.54
CN 20 A 681 K	K 681 K 15 C0G H VB	2222 730 38681	2.54
CN 20 A 821 J	K 821 J 15 C0G H VB	2222 730 37821	2.54
CN 20 A 821 K	K 821 K 15 C0G H VB	2222 730 38821	2.54
CN 20 A 102 J	K 102 J 20 C0G H VB	2222 730 37102	2.54
CN 20 A 102 K	K 102 K 20 C0G H VB	2222 730 38102	2.54
CN 20 A 122 J	K 122 J 20 C0G H VB	2222 730 37122	2.54
CN 20 A 152 J	K 152 J 20 C0G H VB	2222 730 37152	2.54
CN 20 A 152 K	K 152 K 20 C0G H VB	2222 730 38152	2.54
CN 30 A 182 J	K 182 J 20 C0G H VC	2222 730 49182	5.08
CN 30 A 182 K	K 182 K 20 C0G H VC	2222 730 50182	5.08
CN 30 A 222 J	K 222 J 20 C0G H VC	2222 730 49222	5.08
CN 30 A 222 K	K 222 K 20 C0G H VC	2222 730 50222	5.08
CN 30 A 272 J	K 272 J 20 C0G H VC	2222 730 49272	5.08
CN 30 A 272 K	K 272 K 20 C0G H VC	2222 730 50272	5.08
CN 30 A 332 J	K 332 J 20 C0G H VC	2222 730 49332	5.08
CN 30 A 332 K	K 332 K 20 C0G H VC	2222 730 50332	5.08
CN 30 A 392 J	K 392 J 20 C0G H VC	2222 730 49392	5.08
CN 30 A 472 J	K 472 J 20 C0G H VC	2222 730 49472	5.08
CN 30 A 472 K	K 472 K 20 C0G H VC	2222 730 50472	5.08
CN 30 A 682 J	K 682 J 30 C0G H VC	2222 730 49682	5.08
CN 30 A 103 J	K 103 J 30 C0G H VC	2222 730 49103	5.08
CN 30 A 103 K	K 103 K 30 C0G H VC	2222 730 50103	5.08
CN 15 A 100 J DRM	K 100 J 15 C0G H TT	2222 730 53109	5.08
CN 15 A 100 K DRM	K 100 K 15 C0G H TT	2222 730 54109	5.08
CN 15 A 120 J DRM	K 120 J 15 C0G H TT	2222 730 53129	5.08
CN 15 A 120 K DRM	K 120 K 15 C0G H TT	2222 730 54129	5.08
CN 15 A 150 J DRM	K 150 J 15 C0G H TT	2222 730 53159	5.08
CN 15 A 150 K DRM	K 150 K 15 C0G H TT	2222 730 54159	5.08
CN 15 A 180 J DRM	K 180 J 15 C0G H TT	2222 730 53189	5.08
CN 15 A 180 K DRM	K 180 K 15 C0G H TT	2222 730 54189	5.08
CN 15 A 220 J DRM	K 220 J 15 C0G H TT	2222 730 53229	5.08
CN 15 A 220 K DRM	K 220 K 15 C0G H TT	2222 730 54229	5.08
CN 15 A 270 J DRM	K 270 J 15 C0G H TT	2222 730 53279	5.08
CN 15 A 270 K DRM	K 270 K 15 C0G H TT	2222 730 54279	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 15 A 330 J DRM	K 330 J 15 C0G H TT	2222 730 53339	5.08
CN 15 A 330 K DRM	K 330 K 15 C0G H TT	2222 730 54339	5.08
CN 15 A 390 J DRM	K 390 J 15 C0G H TT	2222 730 53399	5.08
CN 15 A 390 K DRM	K 390 K 15 C0G H TT	2222 730 54399	5.08
CN 15 A 470 J DRM	K 470 J 15 C0G H TT	2222 730 53479	5.08
CN 15 A 470 K DRM	K 470 K 15 C0G H TT	2222 730 54479	5.08
CN 15 A 560 J DRM	K 560 J 15 C0G H TT	2222 730 53569	5.08
CN 15 A 560 K DRM	K 560 K 15 C0G H TT	2222 730 54569	5.08
CN 15 A 680 J DRM	K 680 J 15 C0G H TT	2222 730 53689	5.08
CN 15 A 680 K DRM	K 680 K 15 C0G H TT	2222 730 54689	5.08
CN 15 A 820 J DRM	K 820 J 15 C0G H TT	2222 730 53829	5.08
CN 15 A 820 K DRM	K 820 K 15 C0G H TT	2222 730 54829	5.08
CN 15 A 101 J DRM	K 101 J 15 C0G H TT	2222 730 53101	5.08
CN 15 A 101 K DRM	K 101 K 15 C0G H TT	2222 730 54101	5.08
CN 15 A 121 J DRM	K 121 J 15 C0G H TT	2222 730 53121	5.08
CN 15 A 121 K DRM	K 121 K 15 C0G H TT	2222 730 54121	5.08
CN 15 A 151 J DRM	K 151 J 15 C0G H TT	2222 730 53151	5.08
CN 15 A 151 K DRM	K 151 K 15 C0G H TT	2222 730 54151	5.08
CN 15 A 181 J DRM	K 181 J 15 C0G H TT	2222 730 53181	5.08
CN 15 A 181 K DRM	K 181 K 15 C0G H TT	2222 730 54181	5.08
CN 15 A 221 J DRM	K 221 J 15 C0G H TT	2222 730 53221	5.08
CN 15 A 221 K DRM	K 221 K 15 C0G H TT	2222 730 54221	5.08
CN 15 A 271 J DRM	K 271 J 15 C0G H TT	2222 730 53271	5.08
CN 15 A 271 K DRM	K 271 K 15 C0G H TT	2222 730 54271	5.08
CN 15 A 331 J DRM	K 331 J 15 C0G H TT	2222 730 53331	5.08
CN 15 A 331 K DRM	K 331 K 15 C0G H TT	2222 730 54331	5.08
CN 15 A 391 J DRM	K 391 J 15 C0G H TT	2222 730 53391	5.08
CN 15 A 391 K DRM	K 391 K 15 C0G H TT	2222 730 54391	5.08
CN 20 A 471 J DRM	K 471 J 15 C0G H TT	2222 730 53471	5.08
CN 20 A 471 K DRM	K 471 K 15 C0G H TT	2222 730 54471	5.08
CN 20 A 561 J DRM	K 561 J 15 C0G H TT	2222 730 53561	5.08
CN 20 A 561 K DRM	K 561 K 15 C0G H TT	2222 730 54561	5.08
CN 20 A 681 J DRM	K 681 J 15 C0G H TT	2222 730 53681	5.08
CN 20 A 681 K DRM	K 681 K 15 C0G H TT	2222 730 54681	5.08
CN 20 A 821 J DRM	K 821 J 15 C0G H TT	2222 730 53821	5.08
CN 20 A 821 K DRM	K 821 K 15 C0G H TT	2222 730 54821	5.08
CN 20 A 102 J DRM	K 102 J 20 C0G H TT	2222 730 53102	5.08
CN 20 A 102 K DRM	K 102 K 20 C0G H TT	2222 730 54102	5.08
CN 20 A 122 J DRM	K 122 J 20 C0G H TT	2222 730 53122	5.08
CN 20 A 152 J DRM	K 152 J 20 C0G H TT	2222 730 53152	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CN 20 A 152 K DRM	K 152 K 20 C0G H TT	2222 730 54152	5.08
CN 30 A 182 J DRM	K 182 J 20 C0G H TT	2222 730 53182	5.08
CN 30 A 182 K DRM	K 182 K 20 C0G H TT	2222 730 54182	5.08
CN 30 A 222 J DRM	K 222 J 20 C0G H TT	2222 730 53222	5.08
CN 30 A 222 K DRM	K 222 K 20 C0G H TT	2222 730 54222	5.08
CN 30 A 272 J DRM	K 272 J 20 C0G H TT	2222 730 53272	5.08
CN 30 A 272 K DRM	K 272 K 20 C0G H TT	2222 730 54272	5.08
CN 30 A 332 J DRM	K 332 J 20 C0G H TT	2222 730 53332	5.08
CN 30 A 332 K DRM	K 332 K 20 C0G H TT	2222 730 54332	5.08
CN 30 A 392 J DRM	K 392 J 30 C0G H TT	2222 730 53392	5.08
CN 30 A 472 J DRM	K 472 J 30 C0G H TT	2222 730 53472	5.08
CN 30 A 472 K DRM	K 472 K 30 C0G H TT	2222 730 54472	5.08
CN 30 A 682 J DRM	K 682 J 30 C0G H TT	2222 730 53682	5.08
CN 30 A 103 J DRM	K 103 J 30 C0G H TT	2222 730 53103	5.08
CN 30 A 103 K DRM	K 103 K 30 C0G H TT	2222 730 54103	5.08

Note to Table 2

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 3 Mono-kap™ conformal radials X7R, 10% and 20% tolerance, 50 V

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 C 151 K	K 151 K 15 X7R F VB	2222 731 06151	2.54
CW 15 C 181 K	K 181 K 15 X7R F VB	2222 731 06181	2.54
CW 15 C 181 M	K 181 M 15 X7R F VB	2222 731 07181	2.54
CW 15 C 221 K	K 221 K 15 X7R F VB	2222 731 06221	2.54
CW 15 C 271 K	K 271 K 15 X7R F VB	2222 731 06271	2.54
CW 15 C 271 M	K 271 M 15 X7R F VB	2222 731 07271	2.54
CW 15 C 331 K	K 331 K 15 X7R F VB	2222 731 06331	2.54
CW 15 C 331 M	K 331 M 15 X7R F VB	2222 731 07331	2.54
CW 15 C 391 K	K 391 K 15 X7R F VB	2222 731 06391	2.54
CW 15 C 391 M	K 391 M 15 X7R F VB	2222 731 07391	2.54
CW 15 C 471 K	K 471 K 15 X7R F VB	2222 731 06471	2.54
CW 15 C 471 M	K 471 M 15 X7R F VB	2222 731 07471	2.54
CW 15 C 561 K	K 561 K 15 X7R F VB	2222 731 06561	2.54
CW 15 C 681 K	K 681 K 15 X7R F VB	2222 731 06681	2.54
CW 15 C 681 M	K 681 M 15 X7R F VB	2222 731 07681	2.54
CW 15 C 821 K	K 821 K 15 X7R F VB	2222 731 06821	2.54
CW 15 C 821 M	K 821 M 15 X7R F VB	2222 731 07821	2.54
CW 15 C 102 K	K 102 K 15 X7R F VB	2222 731 06102	2.54
CW 15 C 102 M	K 102 M 15 X7R F VB	2222 731 07102	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 C 122 K	K 122 K 15 X7R F VB	2222 731 06122	2.54
CW 15 C 152 K	K 152 K 15 X7R F VB	2222 731 06152	2.54
CW 15 C 182 K	K 182 K 15 X7R F VB	2222 731 06182	2.54
CW 15 C 222 K	K 222 K 15 X7R F VB	2222 731 06222	2.54
CW 15 C 222 M	K 222 M 15 X7R F VB	2222 731 07222	2.54
CW 15 C 272 K	K 272 K 15 X7R F VB	2222 731 06272	2.54
CW 15 C 272 M	K 272 M 15 X7R F VB	2222 731 07272	2.54
CW 15 C 332 K	K 332 K 15 X7R F VB	2222 731 06332	2.54
CW 15 C 332 M	K 332 M 15 X7R F VB	2222 731 07332	2.54
CW 15 C 392 K	K 392 K 15 X7R F VB	2222 731 06392	2.54
CW 15 C 472 K	K 472 K 15 X7R F VB	2222 731 06472	2.54
CW 15 C 472 M	K 472 M 15 X7R F VB	2222 731 07472	2.54
CW 15 C 562 K	K 562 K 15 X7R F VB	2222 731 06562	2.54
CW 15 C 562 M	K 562 M 15 X7R F VB	2222 731 07562	2.54
CW 15 C 682 K	K 682 K 15 X7R F VB	2222 731 06682	2.54
CW 15 C 682 M	K 682 M 15 X7R F VB	2222 731 07682	2.54
CW 15 C 822 K	K 822 K 15 X7R F VB	2222 731 06822	2.54
CW 15 C 822 M	K 822 M 15 X7R F VB	2222 731 07822	2.54
CW 15 C 103 K	K 103 K 15 X7R F VB	2222 731 06103	2.54
CW 15 C 103 M	K 103 M 15 X7R F VB	2222 731 07103	2.54
CW 15 C 153 K	K 153 K 15 X7R F VB	2222 731 06153	2.54
CW 15 C 153 M	K 153 M 15 X7R F VB	2222 731 07153	2.54
CW 20 C 183 K	K 183 K 15 X7R F VB	2222 731 06183	2.54
CW 20 C 183 M	K 183 M 15 X7R F VB	2222 731 07183	2.54
CW 20 C 223 K	K 223 K 15 X7R F VB	2222 731 06223	2.54
CW 20 C 223 M	K 223 M 15 X7R F VB	2222 731 07223	2.54
CW 20 C 273 K	K 273 K 15 X7R F VB	2222 731 06273	2.54
CW 20 C 273 M	K 273 M 15 X7R F VB	2222 731 07273	2.54
CW 20 C 333 K	K 333 K 15 X7R F VB	2222 731 06333	2.54
CW 20 C 333 M	K 333 M 15 X7R F VB	2222 731 07333	2.54
CW 20 C 393 K	K 393 K 20 X7R F VB	2222 731 06393	2.54
CW 20 C 473 K	K 473 K 20 X7R F VB	2222 731 06473	2.54
CW 20 C 473 M	K 473 M 20 X7R F VB	2222 731 07473	2.54
CW 20 C 563 K	K 563 K 20 X7R F VB	2222 731 06563	2.54
CW 20 C 563 M	K 563 M 20 X7R F VB	2222 731 07563	2.54
CW 20 C 683 K	K 683 K 20 X7R F VB	2222 731 06683	2.54
CW 20 C 683 M	K 683 M 20 X7R F VB	2222 731 07683	2.54
CW 20 C 823 K	K 823 K 20 X7R F VB	2222 731 06823	2.54
CW 20 C 104 K	K 104 K 20 X7R F VB	2222 731 06104	2.54
CW 20 C 104 M	K 104 M 20 X7R F VB	2222 731 07104	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 30 C 124 K	K 124 K 20 X7R F VC	2222 731 18124	5.08
CW 30 C 124 M	K 124 M 20 X7R F VC	2222 731 19124	5.08
CW 30 C 154 K	K 154 K 20 X7R F VC	2222 731 18154	5.08
CW 30 C 154 M	K 154 M 20 X7R F VC	2222 731 19154	5.08
CW 30 C 184 K	K 184 K 20 X7R F VC	2222 731 18184	5.08
CW 30 C 184 M	K 184 M 20 X7R F VC	2222 731 19184	5.08
CW 30 C 224 K	K 224 K 20 X7R F VC	2222 731 18224	5.08
CW 30 C 224 M	K 224 M 20 X7R F VC	2222 731 19224	5.08
CW 30 C 274 K	K 274 K 30 X7R F VC	2222 731 18274	5.08
CW 30 C 274 M	K 274 M 30 X7R F VC	2222 731 19274	5.08
CW 30 C 334 K	K 334 K 30 X7R F VC	2222 731 18334	5.08
CW 30 C 334 M	K 334 M 30 X7R F VC	2222 731 19334	5.08
CW 30 C 394 K	K 394 K 30 X7R F VC	2222 731 18394	5.08
CW 30 C 474 K	K 474 K 30 X7R F VC	2222 731 18474	5.08
CW 30 C 474 M	K 474 M 30 X7R F VC	2222 731 19474	5.08
CW 40 C 564 M	K 564 M 30 X7R F VC	2222 731 19564	5.08
CW 40 C 684 K	K 684 K 30 X7R F VC	2222 731 18684	5.08
CW 40 C 824 M	K 824 M 30 X7R F VC	2222 731 19824	5.08
CW 40 C 105 K	K 105 K 30 X7R F VC	2222 731 18105	5.08
CW 40 C 105 M	K 105 M 30 X7R F VC	2222 731 19105	5.08
CW 15 C 151 K DRM	K 151 K 15 X7R F TT	2222 731 22151	5.08
CW 15 C 181 K DRM	K 181 K 15 X7R F TT	2222 731 22181	5.08
CW 15 C 181 M DRM	K 181 M 15 X7R F TT	2222 731 23181	5.08
CW 15 C 221 K DRM	K 221 K 15 X7R F TT	2222 731 22221	5.08
CW 15 C 271 K DRM	K 271 K 15 X7R F TT	2222 731 22271	5.08
CW 15 C 271 M DRM	K 271 M 15 X7R F TT	2222 731 23271	5.08
CW 15 C 331 K DRM	K 331 K 15 X7R F TT	2222 731 22331	5.08
CW 15 C 331 M DRM	K 331 M 15 X7R F TT	2222 731 23331	5.08
CW 15 C 391 K DRM	K 391 K 15 X7R F TT	2222 731 22391	5.08
CW 15 C 391 M DRM	K 391 M 15 X7R F TT	2222 731 23391	5.08
CW 15 C 471 K DRM	K 471 K 15 X7R F TT	2222 731 22471	5.08
CW 15 C 471 M DRM	K 471 M 15 X7R F TT	2222 731 23471	5.08
CW 15 C 561 K DRM	K 561 K 15 X7R F TT	2222 731 22561	5.08
CW 15 C 681 K DRM	K 681 K 15 X7R F TT	2222 731 22681	5.08
CW 15 C 681 M DRM	K 681 M 15 X7R F TT	2222 731 23681	5.08
CW 15 C 821 K DRM	K 821 K 15 X7R F TT	2222 731 22821	5.08
CW 15 C 821 M DRM	K 821 M 15 X7R F TT	2222 731 23821	5.08
CW 15 C 102 K DRM	K 102 K 15 X7R F TT	2222 731 22102	5.08
CW 15 C 102 M DRM	K 102 M 15 X7R F TT	2222 731 23102	5.08
CW 15 C 122 K DRM	K 122 K 15 X7R F TT	2222 731 22122	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 C 152 K DRM	K 152 K 15 X7R F TT	2222 731 22152	5.08
CW 15 C 182 K DRM	K 182 K 15 X7R F TT	2222 731 22182	5.08
CW 15 C 222 K DRM	K 222 K 15 X7R F TT	2222 731 22222	5.08
CW 15 C 222 M DRM	K 222 M 15 X7R F TT	2222 731 23222	5.08
CW 15 C 272 K DRM	K 272 K 15 X7R F TT	2222 731 22272	5.08
CW 15 C 272 M DRM	K 272 M 15 X7R F TT	2222 731 23272	5.08
CW 15 C 332 K DRM	K 332 K 15 X7R F TT	2222 731 22332	5.08
CW 15 C 332 M DRM	K 332 M 15 X7R F TT	2222 731 23332	5.08
CW 15 C 392 K DRM	K 392 K 15 X7R F TT	2222 731 22392	5.08
CW 15 C 472 K DRM	K 472 K 15 X7R F TT	2222 731 22472	5.08
CW 15 C 472 M DRM	K 472 M 15 X7R F TT	2222 731 23472	5.08
CW 15 C 562 K DRM	K 562 K 15 X7R F TT	2222 731 22562	5.08
CW 15 C 562 M DRM	K 562 M 15 X7R F TT	2222 731 23562	5.08
CW 15 C 682 K DRM	K 682 K 15 X7R F TT	2222 731 22682	5.08
CW 15 C 682 M DRM	K 682 M 15 X7R F TT	2222 731 23682	5.08
CW 15 C 822 K DRM	K 822 K 15 X7R F TT	2222 731 22822	5.08
CW 15 C 822 M DRM	K 822 M 15 X7R F TT	2222 731 23822	5.08
CW 15 C 103 K DRM	K 103 K 15 X7R F TT	2222 731 22103	5.08
CW 15 C 103 M DRM	K 103 M 15 X7R F TT	2222 731 23103	5.08
CW 15 C 153 K DRM	K 153 K 15 X7R F TT	2222 731 22153	5.08
CW 15 C 153 M DRM	K 153 M 15 X7R F TT	2222 731 23153	5.08
CW 20 C 183 K DRM	K 183 K 15 X7R F TT	2222 731 22183	5.08
CW 20 C 183 M DRM	K 183 M 15 X7R F TT	2222 731 23183	5.08
CW 20 C 223 K DRM	K 223 K 15 X7R F TT	2222 731 22223	5.08
CW 20 C 223 M DRM	K 223 M 15 X7R F TT	2222 731 23223	5.08
CW 20 C 273 K DRM	K 273 K 15 X7R F TT	2222 731 22273	5.08
CW 20 C 273 M DRM	K 273 M 15 X7R F TT	2222 731 23273	5.08
CW 20 C 333 K DRM	K 333 K 15 X7R F TT	2222 731 22333	5.08
CW 20 C 333 M DRM	K 333 M 15 X7R F TT	2222 731 23333	5.08
CW 20 C 393 K DRM	K 393 K 20 X7R F TT	2222 731 22393	5.08
CW 20 C 473 K DRM	K 473 K 20 X7R F TT	2222 731 22473	5.08
CW 20 C 473 M DRM	K 473 M 20 X7R F TT	2222 731 23473	5.08
CW 20 C 563 K DRM	K 563 K 20 X7R F TT	2222 731 22563	5.08
CW 20 C 563 M DRM	K 563 M 20 X7R F TT	2222 731 23563	5.08
CW 20 C 683 K DRM	K 683 K 20 X7R F TT	2222 731 22683	5.08
CW 20 C 683 M DRM	K 683 M 20 X7R F TT	2222 731 23683	5.08
CW 20 C 823 K DRM	K 823 K 20 X7R F TT	2222 731 22823	5.08
CW 20 C 104 K DRM	K 104 K 20 X7R F TT	2222 731 22104	5.08
CW 20 C 104 M DRM	K 104 M 20 X7R F TT	2222 731 23104	5.08
CW 30 C 124 K DRM	K 124 K 20 X7R F TT	2222 731 22124	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 30 C 124 M DRM	K 124 M 20 X7R F TT	2222 731 23124	5.08
CW 30 C 154 K DRM	K 154 K 20 X7R F TT	2222 731 22154	5.08
CW 30 C 154 M DRM	K 154 M 20 X7R F TT	2222 731 23154	5.08
CW 30 C 184 K DRM	K 184 K 20 X7R F TT	2222 731 22184	5.08
CW 30 C 184 M DRM	K 184 M 20 X7R F TT	2222 731 23184	5.08
CW 30 C 224 K DRM	K 224 K 20 X7R F TT	2222 731 22224	5.08
CW 30 C 224 M DRM	K 224 M 20 X7R F TT	2222 731 23224	5.08
CW 30 C 274 K DRM	K 274 K 30 X7R F TT	2222 731 22274	5.08
CW 30 C 274 M DRM	K 274 M 30 X7R F TT	2222 731 23274	5.08
CW 30 C 334 K DRM	K 334 K 30 X7R F TT	2222 731 22334	5.08
CW 30 C 334 M DRM	K 334 M 30 X7R F TT	2222 731 23334	5.08
CW 30 C 394 K DRM	K 394 K 30 X7R F TT	2222 731 22394	5.08
CW 30 C 474 K DRM	K 474 K 30 X7R F TT	2222 731 22474	5.08
CW 30 C 474 M DRM	K 474 M 30 X7R F TT	2222 731 23474	5.08
CW 40 C 564 M DRM	K 564 M 30 X7R F TT	2222 731 23564	5.08
CW 40 C 684 K DRM	K 684 K 30 X7R F TT	2222 731 22684	5.08
CW 40 C 824 M DRM	K 824 M 30 X7R F TT	2222 731 23824	5.08
CW 40 C 105 K DRM	K 105 K 30 X7R F TT	2222 731 22105	5.08
CW 40 C 105 M DRM	K 105 M 30 X7R F TT	2222 731 23105	5.08

Note to Table 3

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 4 Mono-kap™ conformal radials X7R, 10% and 20% tolerance, 100 V

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 A 151 K	K 151 K 15 X7R H VB	2222 731 38151	2.54
CW 15 A 151 M	K 151 M 15 X7R H VB	2222 731 39151	2.54
CW 15 A 181 K	K 181 K 15 X7R H VB	2222 731 38181	2.54
CW 15 A 221 K	K 221 K 15 X7R H VB	2222 731 38221	2.54
CW 15 A 221 M	K 221 M 15 X7R H VB	2222 731 39221	2.54
CW 15 A 271 K	K 271 K 15 X7R H VB	2222 731 38271	2.54
CW 15 A 331 K	K 331 K 15 X7R H VB	2222 731 38331	2.54
CW 15 A 331 M	K 331 M 15 X7R H VB	2222 731 39331	2.54
CW 15 A 391 K	K 391 K 15 X7R H VB	2222 731 38391	2.54
CW 15 A 391 M	K 391 M 15 X7R H VB	2222 731 39391	2.54
CW 15 A 471 K	K 471 K 15 X7R H VB	2222 731 38471	2.54
CW 15 A 471 M	K 471 M 15 X7R H VB	2222 731 39471	2.54
CW 15 A 561 K	K 561 K 15 X7R H VB	2222 731 38561	2.54
CW 15 A 561 M	K 561 M 15 X7R H VB	2222 731 39561	2.54
CW 15 A 681 K	K 681 K 15 X7R H VB	2222 731 38681	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 A 821 K	K 821 K 15 X7R H VB	2222 731 38821	2.54
CW 15 A 102 K	K 102 K 15 X7R H VB	2222 731 38102	2.54
CW 15 A 102 M	K 102 M 15 X7R H VB	2222 731 39102	2.54
CW 15 A 122 K	K 122 K 15 X7R H VB	2222 731 38122	2.54
CW 15 A 122 M	K 122 M 15 X7R H VB	2222 731 39122	2.54
CW 15 A 152 K	K 152 K 15 X7R H VB	2222 731 38152	2.54
CW 15 A 182 K	K 182 K 15 X7R H VB	2222 731 38182	2.54
CW 15 A 222 K	K 222 K 15 X7R H VB	2222 731 38222	2.54
CW 15 A 222 M	K 222 M 15 X7R H VB	2222 731 39222	2.54
CW 15 A 272 K	K 272 K 15 X7R H VB	2222 731 38272	2.54
CW 15 A 332 K	K 332 K 15 X7R H VB	2222 731 38332	2.54
CW 15 A 332 M	K 332 M 15 X7R H VB	2222 731 39332	2.54
CW 15 A 392 K	K 392 K 15 X7R H VB	2222 731 38392	2.54
CW 15 A 472 K	K 472 K 15 X7R H VB	2222 731 38472	2.54
CW 15 A 472 M	K 472 M 15 X7R H VB	2222 731 39472	2.54
CW 15 A 562 K	K 562 K 15 X7R H VB	2222 731 38562	2.54
CW 15 A 682 K	K 682 K 15 X7R H VB	2222 731 38682	2.54
CW 15 A 682 M	K 682 M 15 X7R H VB	2222 731 39682	2.54
CW 15 A 822 K	K 822 K 15 X7R H VB	2222 731 38822	2.54
CW 15 A 103 K	K 103 K 15 X7R H VB	2222 731 38103	2.54
CW 15 A 103 M	K 103 M 15 X7R H VB	2222 731 39103	2.54
CW 15 A 123 K	K 123 K 15 X7R H VB	2222 731 38123	2.54
CW 20 A 153 K	K 153 K 20 X7R H VB	2222 731 38153	2.54
CW 20 A 153 M	K 153 M 20 X7R H VB	2222 731 39153	2.54
CW 20 A 183 K	K 183 K 20 X7R H VB	2222 731 38183	2.54
CW 20 A 223 K	K 223 K 20 X7R H VB	2222 731 38223	2.54
CW 20 A 223 M	K 223 M 20 X7R H VB	2222 731 39223	2.54
CW 20 A 273 K	K 273 K 20 X7R H VB	2222 731 38273	2.54
CW 20 A 273 M	K 273 M 20 X7R H VB	2222 731 39273	2.54
CW 20 A 333 K	K 333 K 20 X7R H VB	2222 731 38333	2.54
CW 20 A 333 M	K 333 M 20 X7R H VB	2222 731 39333	2.54
CW 20 A 393 M	K 393 M 20 X7R H VB	2222 731 39393	2.54
CW 20 A 473 K	K 473 K 20 X7R H VB	2222 731 38473	2.54
CW 20 A 473 M	K 473 M 20 X7R H VB	2222 731 39473	2.54
CW 20 A 563 K	K 563 K 20 X7R H VB	2222 731 38563	2.54
CW 20 A 683 K	K 683 K 20 X7R H VB	2222 731 38683	2.54
CW 20 A 683 M	K 683 M 20 X7R H VB	2222 731 39683	2.54
CW 20 A 823 M	K 823 M 20 X7R H VB	2222 731 39823	2.54
CW 20 A 104 K	K 104 K 20 X7R H VB	2222 731 38104	2.54
CW 20 A 104 M	K 104 M 20 X7R H VB	2222 731 39104	2.54

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 30 A 124 K	K 124 K 30 X7R H VC	2222 731 50124	5.08
CW 30 A 124 M	K 124 M 30 X7R H VC	2222 731 51124	5.08
CW 30 A 224 K	K 224 K 30 X7R H VC	2222 731 50224	5.08
CW 30 A 224 M	K 224 M 30 X7R H VC	2222 731 51224	5.08
CW 30 A 334 K	K 334 K 30 X7R H VC	2222 731 50334	5.08
CW 15 A 151 K DRM	K 151 K 15 X7R H TT	2222 731 54151	5.08
CW 15 A 151 M DRM	K 151 M 15 X7R H TT	2222 731 55151	5.08
CW 15 A 181 K DRM	K 181 K 15 X7R H TT	2222 731 54181	5.08
CW 15 A 221 K DRM	K 221 K 15 X7R H TT	2222 731 54221	5.08
CW 15 A 221 M DRM	K 221 M 15 X7R H TT	2222 731 55221	5.08
CW 15 A 271 K DRM	K 271 K 15 X7R H TT	2222 731 54271	5.08
CW 15 A 331 K DRM	K 331 K 15 X7R H TT	2222 731 54331	5.08
CW 15 A 331 M DRM	K 331 M 15 X7R H TT	2222 731 55331	5.08
CW 15 A 391 K DRM	K 391 K 15 X7R H TT	2222 731 54391	5.08
CW 15 A 391 M DRM	K 391 M 15 X7R H TT	2222 731 55391	5.08
CW 15 A 471 K DRM	K 471 K 15 X7R H TT	2222 731 54471	5.08
CW 15 A 471 M DRM	K 471 M 15 X7R H TT	2222 731 55471	5.08
CW 15 A 561 K DRM	K 561 K 15 X7R H TT	2222 731 54561	5.08
CW 15 A 561 M DRM	K 561 M 15 X7R H TT	2222 731 55561	5.08
CW 15 A 681 K DRM	K 681 K 15 X7R H TT	2222 731 54681	5.08
CW 15 A 821 K DRM	K 821 K 15 X7R H TT	2222 731 54821	5.08
CW 15 A 102 K DRM	K 102 K 15 X7R H TT	2222 731 54102	5.08
CW 15 A 102 M DRM	K 102 M 15 X7R H TT	2222 731 55102	5.08
CW 15 A 122 K DRM	K 122 K 15 X7R H TT	2222 731 54122	5.08
CW 15 A 122 M DRM	K 122 M 15 X7R H TT	2222 731 55122	5.08
CW 15 A 152 K DRM	K 152 K 15 X7R H TT	2222 731 54152	5.08
CW 15 A 182 K DRM	K 182 K 15 X7R H TT	2222 731 54182	5.08
CW 15 A 222 K DRM	K 222 K 15 X7R H TT	2222 731 54222	5.08
CW 15 A 222 M DRM	K 222 M 15 X7R H TT	2222 731 55222	5.08
CW 15 A 272 K DRM	K 272 K 15 X7R H TT	2222 731 54272	5.08
CW 15 A 332 K DRM	K 332 K 15 X7R H TT	2222 731 54332	5.08
CW 15 A 332 M DRM	K 332 M 15 X7R H TT	2222 731 55332	5.08
CW 15 A 392 K DRM	K 392 K 15 X7R H TT	2222 731 54392	5.08
CW 15 A 472 K DRM	K 472 K 15 X7R H TT	2222 731 54472	5.08
CW 15 A 472 M DRM	K 472 M 15 X7R H TT	2222 731 55472	5.08
CW 15 A 562 K DRM	K 562 K 15 X7R H TT	2222 731 54562	5.08
CW 15 A 682 K DRM	K 682 K 15 X7R H TT	2222 731 54682	5.08
CW 15 A 682 M DRM	K 682 M 15 X7R H TT	2222 731 55682	5.08
CW 15 A 822 K DRM	K 822 K 15 X7R H TT	2222 731 54822	5.08
CW 15 A 103 K DRM	K 103 K 15 X7R H TT	2222 731 54103	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CW 15 A 103 M DRM	K 103 M 15 X7R H TT	2222 731 55103	5.08
CW 15 A 123 K DRM	K 123 K 15 X7R H TT	2222 731 54123	5.08
CW 20 A 153 K DRM	K 153 K 15 X7R H TT	2222 731 54153	5.08
CW 20 A 153 M DRM	K 153 M 15 X7R H TT	2222 731 55153	5.08
CW 20 A 183 K DRM	K 183 K 20 X7R H TT	2222 731 54183	5.08
CW 20 A 223 K DRM	K 223 K 20 X7R H TT	2222 731 54223	5.08
CW 20 A 223 M DRM	K 223 M 20 X7R H TT	2222 731 55223	5.08
CW 20 A 273 K DRM	K 273 K 20 X7R H TT	2222 731 54273	5.08
CW 20 A 273 M DRM	K 273 M 20 X7R H TT	2222 731 55273	5.08
CW 20 A 333 K DRM	K 333 K 20 X7R H TT	2222 731 54333	5.08
CW 20 A 333 M DRM	K 333 M 20 X7R H TT	2222 731 55333	5.08
CW 20 A 393 M DRM	K 393 M 20 X7R H TT	2222 731 55393	5.08
CW 20 A 473 K DRM	K 473 K 20 X7R H TT	2222 731 54473	5.08
CW 20 A 473 M DRM	K 473 M 20 X7R H TT	2222 731 55473	5.08
CW 20 A 563 K DRM	K 563 K 20 X7R H TT	2222 731 54563	5.08
CW 20 A 683 K DRM	K 683 K 20 X7R H TT	2222 731 54683	5.08
CW 20 A 683 M DRM	K 683 M 20 X7R H TT	2222 731 55683	5.08
CW 20 A 823 M DRM	K 823 M 20 X7R H TT	2222 731 55823	5.08
CW 20 A 104 K DRM	K 104 K 20 X7R H TT	2222 731 54104	5.08
CW 20 A 104 M DRM	K 104 M 20 X7R H TT	2222 731 55104	5.08
CW 30 A 124 K DRM	K 124 K 30 X7R H TT	2222 731 54124	5.08
CW 30 A 124 M DRM	K 124 M 30 X7R H TT	2222 731 55124	5.08
CW 30 A 224 K DRM	K 224 K 30 X7R H TT	2222 731 54224	5.08
CW 30 A 224 M DRM	K 224 M 30 X7R H TT	2222 731 55224	5.08
CW 30 A 334 K DRM	K 334 K 30 X7R H TT	2222 731 54334	5.08

Note to Table 4

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 5 Mono-kap™ conformal radials **Z5U**, $\pm 20\%$; $-20\%/+80\%$ tolerance, **50 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CZ 15 C 102 M	K 102 M 15 Z5U F VB	2222 733 07102	2.54
CZ 15 C 152 M	K 152 M 15 Z5U F VB	2222 733 07152	2.54
CZ 15 C 182 Z	K 182 Z 15 Z5U F VB	2222 733 08182	2.54
CZ 15 C 222 M	K 222 M 15 Z5U F VB	2222 733 07222	2.54
CZ 15 C 332 Z	K 332 Z 15 Z5U F VB	2222 733 08332	2.54
CZ 15 C 392 M	K 392 M 15 Z5U F VB	2222 733 07392	2.54
CZ 15 C 472 Z	K 472 Z 15 Z5U F VB	2222 733 08472	2.54
CZ 15 C 682 M	K 682 M 15 Z5U F VB	2222 733 07682	2.54
CZ 15 C 682 Z	K 682 Z 15 Z5U F VB	2222 733 08682	2.54

Leaded ceramic multilayer capacitors

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CZ 15 C 822 M	K 822 M 15 Z5U F VB	2222 733 07822	2.54
CZ 15 C 103 M	K 103 M 15 Z5U F VB	2222 733 07103	2.54
CZ 15 C 103 Z	K 103 Z 15 Z5U F VB	2222 733 08103	2.54
CZ 15 C 123 M	K 123 M 15 Z5U F VB	2222 733 07123	2.54
CZ 15 C 123 Z	K 123 Z 15 Z5U F VB	2222 733 08123	2.54
CZ 15 C 183 M	K 183 M 15 Z5U F VB	2222 733 07183	2.54
CZ 15 C 223 M	K 223 M 15 Z5U F VB	2222 733 07223	2.54
CZ 15 C 223 Z	K 223 Z 15 Z5U F VB	2222 733 08223	2.54
CZ 15 C 273 M	K 273 M 15 Z5U F VB	2222 733 07273	2.54
CZ 15 C 333 M	K 333 M 15 Z5U F VB	2222 733 07333	2.54
CZ 15 C 333 Z	K 333 Z 15 Z5U F VB	2222 733 08333	2.54
CZ 20 C 473 M	K 473 M 15 Z5U F VB	2222 733 07473	2.54
CZ 20 C 473 Z	K 473 Z 15 Z5U F VB	2222 733 08473	2.54
CZ 20 C 683 M	K 683 M 15 Z5U F VB	2222 733 07683	2.54
CZ 20 C 683 Z	K 683 Z 15 Z5U F VB	2222 733 08683	2.54
CZ 20 C 104 M	K 104 M 15 Z5U F VB	2222 733 07104	2.54
CZ 20 C 104 Z	K 104 Z 15 Z5U F VB	2222 733 08104	2.54
CZ 20 C 124 M	K 124 M 20 Z5U F VB	2222 733 07124	2.54
CZ 20 C 154 M	K 154 M 20 Z5U F VB	2222 733 07154	2.54
CZ 20 C 154 Z	K 154 Z 20 Z5U F VB	2222 733 08154	2.54
CZ 20 C 184 M	K 184 M 20 Z5U F VB	2222 733 07184	2.54
CZ 20 C 224 M	K 224 M 20 Z5U F VB	2222 733 07224	2.54
CZ 20 C 224 Z	K 224 Z 20 Z5U F VB	2222 733 08224	2.54
CZ 20 C 334 M	K 334 M 20 Z5U F VB	2222 733 07334	2.54
CZ 30 C 474 M	K 474 M 30 Z5U F VC	2222 733 19474	5.08
CZ 30 C 474 Z	K 474 Z 30 Z5U F VC	2222 733 20474	5.08
CZ 30 C 684 M	K 684 M 30 Z5U F VC	2222 733 19684	5.08
CZ 30 C 824 M	K 824 M 30 Z5U F VC	2222 733 19824	5.08
CZ 30 C 105 M	K 105 M 30 Z5U F VC	2222 733 19105	5.08
CZ 30 C 105 Z	K 105 Z 30 Z5U F VC	2222 733 20105	5.08
CZ 15 C 102 M DRM	K 102 M 15 Z5U F TT	2222 733 23102	5.08
CZ 15 C 152 M DRM	K 152 M 15 Z5U F TT	2222 733 23152	5.08
CZ 15 C 182 Z DRM	K 182 Z 15 Z5U F TT	2222 733 24182	5.08
CZ 15 C 222 M DRM	K 222 M 15 Z5U F TT	2222 733 23222	5.08
CZ 15 C 332 Z DRM	K 332 Z 15 Z5U F TT	2222 733 24332	5.08
CZ 15 C 392 M DRM	K 392 M 15 Z5U F TT	2222 733 23392	5.08
CZ 15 C 472 Z DRM	K 472 Z 15 Z5U F TT	2222 733 24472	5.08
CZ 15 C 682 M DRM	K 682 M 15 Z5U F TT	2222 733 23682	5.08
CZ 15 C 682 Z DRM	K 682 Z 15 Z5U F TT	2222 733 24682	5.08
CZ 15 C 822 M DRM	K 822 M 15 Z5U F TT	2222 733 23822	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CZ 15 C 103 M DRM	K 103 M 15 Z5U F TT	2222 733 23103	5.08
CZ 15 C 103 Z DRM	K 103 Z 15 Z5U F TT	2222 733 24103	5.08
CZ 15 C 123 M DRM	K 123 M 15 Z5U F TT	2222 733 23123	5.08
CZ 15 C 123 Z DRM	K 123 Z 15 Z5U F TT	2222 733 24123	5.08
CZ 15 C 183 M DRM	K 183 M 15 Z5U F TT	2222 733 23183	5.08
CZ 15 C 223 M DRM	K 223 M 15 Z5U F TT	2222 733 23223	5.08
CZ 15 C 223 Z DRM	K 223 Z 15 Z5U F TT	2222 733 24223	5.08
CZ 15 C 273 M DRM	K 273 M 15 Z5U F TT	2222 733 23273	5.08
CZ 15 C 333 M DRM	K 333 M 15 Z5U F TT	2222 733 23333	5.08
CZ 15 C 333 Z DRM	K 333 Z 15 Z5U F TT	2222 733 24333	5.08
CZ 20 C 473 M DRM	K 473 M 15 Z5U F TT	2222 733 23473	5.08
CZ 20 C 473 Z DRM	K 473 Z 15 Z5U F TT	2222 733 24473	5.08
CZ 20 C 683 M DRM	K 683 M 15 Z5U F TT	2222 733 23683	5.08
CZ 20 C 683 Z DRM	K 683 Z 15 Z5U F TT	2222 733 24683	5.08
CZ 20 C 104 M DRM	K 104 M 15 Z5U F TT	2222 733 23104	5.08
CZ 20 C 104 Z DRM	K 104 Z 15 Z5U F TT	2222 733 24104	5.08
CZ 20 C 124 M DRM	K 124 M 20 Z5U F TT	2222 733 23124	5.08
CZ 20 C 154 M DRM	K 154 M 20 Z5U F TT	2222 733 23154	5.08
CZ 20 C 154 Z DRM	K 154 Z 20 Z5U F TT	2222 733 24154	5.08
CZ 20 C 184 M DRM	K 184 M 20 Z5U F TT	2222 733 23184	5.08
CZ 20 C 224 M DRM	K 224 M 20 Z5U F TT	2222 733 23224	5.08
CZ 20 C 224 Z DRM	K 224 Z 20 Z5U F TT	2222 733 24224	5.08
CZ 20 C 334 M DRM	K 334 M 20 Z5U F TT	2222 733 23334	5.08
CZ 30 C 474 M DRM	K 474 M 30 Z5U F TT	2222 733 23474	5.08
CZ 30 C 474 Z DRM	K 474 Z 30 Z5U F TT	2222 733 24474	5.08
CZ 30 C 684 M DRM	K 684 M 30 Z5U F TT	2222 733 23684	5.08
CZ 30 C 824 M DRM	K 824 M 30 Z5U F TT	2222 733 23824	5.08
CZ 30 C 105 M DRM	K 105 M 30 Z5U F TT	2222 733 23105	5.08
CZ 30 C 105 Z DRM	K 105 Z 30 Z5U F TT	2222 733 24105	5.08

Note to Table 5

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Leaded ceramic multilayer capacitors

Table 6 Mono-kap™ conformal radials **Z5U**, $\pm 20\%$; $-20\%/+80\%$ tolerance, **100 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CZ 15 A 102 M	K 102 M 15 Z5U H VB	2222 733 39102	2.54
CZ 15 A 102 Z	K 102 Z 15 Z5U H VB	2222 733 40102	2.54
CZ 15 A 222 M	K 222 M 15 Z5U H VB	2222 733 39222	2.54
CZ 15 A 332 Z	K 332 Z 15 Z5U H VB	2222 733 40332	2.54
CZ 15 A 392 M	K 392 M 15 Z5U H VB	2222 733 39392	2.54
CZ 15 A 472 M	K 472 M 15 Z5U H VB	2222 733 39472	2.54
CZ 15 A 472 Z	K 472 Z 15 Z5U H VB	2222 733 40472	2.54
CZ 15 A 822 M	K 822 M 15 Z5U H VB	2222 733 39822	2.54
CZ 15 A 103 M	K 103 M 15 Z5U H VB	2222 733 39103	2.54
CZ 15 A 103 Z	K 103 Z 15 Z5U H VB	2222 733 40103	2.54
CZ 15 A 123 M	K 123 M 15 Z5U H VB	2222 733 39123	2.54
CZ 20 A 223 M	K 223 M 20 Z5U H VB	2222 733 39223	2.54
CZ 20 A 223 Z	K 223 Z 20 Z5U H VB	2222 733 40223	2.54
CZ 20 A 333 M	K 333 M 20 Z5U H VB	2222 733 39333	2.54
CZ 20 A 393 M	K 393 M 20 Z5U H VB	2222 733 39393	2.54
CZ 20 A 473 M	K 473 M 20 Z5U H VB	2222 733 39473	2.54
CZ 20 A 683 M	K 683 M 20 Z5U H VB	2222 733 39683	2.54
CZ 20 A 104 M	K 104 M 20 Z5U H VB	2222 733 39104	2.54
CZ 30 A 224 M	K 224 M 30 Z5U H VC	2222 733 51224	5.08
CZ 30 A 334 M	K 334 M 30 Z5U H VC	2222 733 51334	5.08
CZ 30 A 474 M	K 474 M 30 Z5U H VC	2222 733 51474	5.08
CZ 30 A 474 Z	K 474 Z 30 Z5U H VC	2222 733 52474	5.08
CZ 15 A 102 M DRM	K 102 M 15 Z5U H TT	2222 733 55102	5.08
CZ 15 A 102 Z DRM	K 102 Z 15 Z5U H TT	2222 733 56102	5.08
CZ 15 A 222 M DRM	K 222 M 15 Z5U H TT	2222 733 55222	5.08
CZ 15 A 332 Z DRM	K 332 Z 15 Z5U H TT	2222 733 56332	5.08
CZ 15 A 392 M DRM	K 392 M 15 Z5U H TT	2222 733 55392	5.08
CZ 15 A 472 M DRM	K 472 M 15 Z5U H TT	2222 733 55472	5.08
CZ 15 A 472 Z DRM	K 472 Z 15 Z5U H TT	2222 733 56472	5.08
CZ 15 A 822 M DRM	K 822 M 15 Z5U H TT	2222 733 55822	5.08
CZ 15 A 103 M DRM	K 103 M 15 Z5U H TT	2222 733 55103	5.08
CZ 15 A 103 Z DRM	K 103 Z 15 Z5U H TT	2222 733 56103	5.08
CZ 15 A 123 M DRM	K 123 M 15 Z5U H TT	2222 733 55123	5.08
CZ 20 A 223 M DRM	K 223 M 20 Z5U H TT	2222 733 55223	5.08
CZ 20 A 223 Z DRM	K 223 Z 20 Z5U H TT	2222 733 56223	5.08
CZ 20 A 333 M DRM	K 333 M 20 Z5U H TT	2222 733 55333	5.08
CZ 20 A 393 M DRM	K 393 M 20 Z5U H TT	2222 733 55393	5.08
CZ 20 A 473 M DRM	K 473 M 20 Z5U H TT	2222 733 55473	5.08
CZ 20 A 683 M DRM	K 683 M 20 Z5U H TT	2222 733 55683	5.08

Leaded ceramic multilayer capacitors

Cross reference
selection guide

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE	PITCH
CZ 20 A 104 M DRM	K 104 M 20 Z5U H TT	2222 733 55104	5.08
CZ 20 A 104 Z DRM	K 104 Z 20 Z5U H TT	2222 733 56104	5.08
CZ 20 A 124 M DRM	K 124 M 20 Z5U H TT	2222 733 55124	5.08
CZ 20 A 154 M DRM	K 154 M 30 Z5U H TT	2222 733 55154	5.08
CZ 30 A 224 M DRM	K 224 M 30 Z5U H TT	2222 733 55224	5.08
CZ 30 A 334 M DRM	K 334 M 30 Z5U H TT	2222 733 55334	5.08
CZ 30 A 474 M DRM	K 474 M 30 Z5U H TT	2222 733 55474	5.08
CZ 30 A 474 Z DRM	K 474 Z 30 Z5U H TT	2222 733 56474	5.08

Note to Table 6

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 7 Mono-axial™ conformal axials **NPO (C0G)**, 5% tolerance, **50 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE
A 40 C 101 J DRM	A 101 J 15 C0G F VV	2222 740 09101
A 40 C 151 J DRM	A 151 J 15C0G F VV	2222 740 09151
A 40 C 181 J DRM	A 181 J 15 C0G F VV	2222 740 09181
A 40 C 221 J DRM	A 221 J 15 C0G F VV	2222 740 09221
A 40 C 331 J DRM	A 331 J 15 C0G F VV	2222 740 09331
A 40 C 391 J DRM	A 391 J 15 C0G F VV	2222 740 09391
A 40 C 471 J DRM	A 471 J 15 C0G F VV	2222 740 09471
A 40 C 561 J DRM	A 561 J 15 C0G F VV	2222 740 09561
A 40 C 681 J DRM	A 681 J 15 C0G F VV	2222 740 09681
A 40 C 102 J DRM	A 102 J 15 C0G F VV	2222 740 09102

Note

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Leaded ceramic multilayer capacitors

Cross reference
selection guide**Table 8** Mono-axial™ conformal axials **NPO (C0G)**, 5% tolerance, **100 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE
A 40 A 100 J DRM	A 100 J 15 C0G H VV	2222 740 41109
A 40 A 150 J DRM	A 150 J 15 C0G H VV	2222 740 41159
A 40 A 180 J DRM	A 180 J 15 C0G H VV	2222 740 41189
A 40 A 220 J DRM	A 220 J 15 C0G H VV	2222 740 41229
A 40 A 270 J DRM	A 270 J 15 C0G H VV	2222 740 41279
A 40 A 330 J DRM	A 330 J 15 C0G H VV	2222 740 41339
A 40 A 470 J DRM	A 470 J 15 C0G H VV	2222 740 41479
A 40 A 680 J DRM	A 680 J 15 C0G H VV	2222 740 41689
A 40 A 820 J DRM	A 820 J 15 C0G H VV	2222 740 41829

Note

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 9 Mono-axial™ conformal axials **X7R**, 10% tolerance, **50 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE
A 41 C 332 K DRM	A 332 K 15 X7R F VV	2222 741 10332
A 41 C 472 K DRM	A 472 K 15 X7R F VV	2222 741 10472
A 41 C 103 K DRM	A 103 K 15 X7R F VV	2222 741 10103
A 41 C 153 K DRM	A 153 K 15 X7R F VV	2222 741 10153
A 41 C 223 K DRM	A 223 K 15 X7R F VV	2222 741 10223
A 41 C 333 K DRM	A 333 K 15 X7R F VV	2222 741 10333
A 41 C 473 K DRM	A 473 K 20 X7R F VV	2222 741 10473
A 41 C 563 K DRM	A 563 K 20 X7R F VV	2222 741 10563
A 41 C 104 K DRM	A 104 K 20 X7R F VV	2222 741 10104

Note

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Leaded ceramic multilayer capacitors

Cross reference
selection guide**Table 10** Mono-axial™ conformal axials **X7R**, 10% tolerance, **100 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE
A 41 A 221 K DRM	A 221 K 15 X7R H VV	2222 741 42221
A 41 A 271 K DRM	A 271 K 15 X7R H VV	2222 741 42271
A 41 A 331 K DRM	A 331 K 15 X7R H VV	2222 741 42331
A 41 A 471 K DRM	A 471 K 15 X7R H VV	2222 741 42471
A 41 A 681 K DRM	A 681 K 15 X7R H VV	2222 741 42681
A 41 A 821 K DRM	A 821 K 15 X7R H VV	2222 741 42821
A 41 A 102 K DRM	A 102 K 15 X7R H VV	2222 741 42102
A 41 A 122 K DRM	A 122 K 15 X7R H VV	2222 741 42122
A 41 A 152 K DRM	A 152 K 15 X7R H VV	2222 741 42152
A 41 A 222 K DRM	A 222 K 15 X7R H VV	2222 741 42222

Note

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

Table 11 Mono-axial™ conformal axials **Z5U**, **M** and **Z** tolerance codes, **50 V**

DISTRIBUTION PART NUMBER	15-DIGIT CODE ⁽¹⁾	12NC CODE
A 42 C 103 M DRM	A 103 M 15 Z5U F VV	2222 742 11103
A 42 C 103 Z DRM	A 103 Z 15 Z5U F VV	2222 742 12103
A 42 C 223 M DRM	A 223 M 15 Z5U F VV	2222 742 11223
A 42 C 333 M DRM	A 333 M 15 Z5U F VV	2222 742 11333
A 42 C 473 M DRM	A 473 M 15 Z5U F VV	2222 742 11473
A 42 C 473 Z DRM	A 473 Z 15 Z5U F VV	2222 742 12473
A 42 C 104 M DRM	A 104 M 15 Z5U F VV	2222 742 11104
A 42 C 104 Z DRM	A 104 Z 15 Z5U F VV	2222 742 12104
A 42 C 224 M DRM	A 224 M 20 Z5U F VV	2222 742 11224
A 42 C 224 Z DRM	A 224 Z 20 Z5U F VV	2222 742 12224
A 42 C 274 Z DRM	A 274 Z 30 Z5U F VV	2222 742 12274
A 42 C 334 M DRM	A 334 M 30 Z5U F VV	2222 742 11334
A 42 C 334 Z DRM	A 334 Z 30 Z5U F VV	2222 742 12334
A 42 C 474 Z DRM	A 474 Z 30 Z5U F VV	2222 742 12474

Note

1. Only the first 13 digits of the 15-digit code are significant for cross reference purposes.

MINIATURE CERAMIC PLATE CAPACITORS

	Page
NUMERICAL INDEX	144
SELECTION GUIDE	149
GENERAL DATA	
Current and maintenance types	152
Composition, colour coding and marking	155
Packaging	156
Tests and requirements	165
Clear text code	171
PRODUCT DATA	
Precision capacitors NP0	174
Class 1, 100 V (DC) flanged	182
Class 2, 63 V and 100 V (DC) flanged	191
Class 1, 500 V (DC) flanged	206
Class 2, 500 V (DC) flanged	217
Class 1, 1000 V (DC) flanged	223
Class 2, 1000 V (DC) 2C2 and 2D1 flanged	228
Class 2, 1000 V (DC) 2E2 flanged	233
Sample kits	239

Miniature ceramic plate capacitors

Numerical index

NUMERICAL INDEX FOR MINIATURE CERAMIC PLATE CAPACITORS

Flanged, preferred types.

12NC 2222	TC	COLOUR CODE	CLASS	CAPACITANCE RANGE (pF)	U _{R(DC)} (V)	H ₀ (mm)	LEAD LENGTH (mm)	PITCH	PACKAGING	PAGE
629	2F6 (Y5V)	green	2	1000 to 47000	63	18.25	>13	1e	loose	195
							>13	2e	loose	
							4 ±0.5	1e	loose	
							4 ±0.5	2e	loose	
							—	1e	tape on reel	
							—	2e	tape on reel	
							—	1e	armmopack	
							—	2e	armmopack	
630	2C2-2E1 (X5S/X7T)	yellow	2	180 to 6800	100	18.25	>13	1e	loose	194
							>13	2e	loose	
							4 ±0.5	1e	loose	
							4 ±0.5	2e	loose	
							—	1e	tape on reel	
							—	2e	tape on reel	
							—	1e	armmopack	
							—	2e	armmopack	
640	2E2 (X5U)	blue	2	1000 to 15000	100	18.25	>13	1e	loose	195
							>13	2e	loose	
							4 ±0.5	1e	loose	
							4 ±0.5	2e	loose	
							—	1e	tape on reel	
							—	2e	tape on reel	
							—	1e	armmopack	
							—	2e	armmopack	

Miniature ceramic plate capacitors

Numerical index

12NC 2222	TC	COLOUR CODE	CLASS	CAPACITANCE RANGE (pF)	$U_{R(DC)}$ (V)	H_0 (mm)	LEAD LENGTH (mm)	PITCH	PACKAGING	PAGE
652	03/04...	red/violet	1	0.47 to 33	500	-	>13	2e	loose	208
	09/10...	black		0.82 to 150						
	33/34...	orange		2.2 to 150						
	57/58...	violet		1.8 to 150						
	69/70...	orange/orange		8.2 to 330						
653	03/04...	red/violet	1	0.47 to 33	500	-	4 ±0.5	2e	loose	208
	09/10...	black		0.82 to 150						
	33/34...	orange		2.2 to 150						
	57/58...	violet		1.8 to 150						
	69/70...	orange/orange		8.2 to 330						
654	03/04...	red/violet	1	0.47 to 33	500	18.25	-	2e	tape on reel	208
	09/10...	black		0.82 to 150						
	33/34...	orange		2.2 to 150						
	57/58...	violet		1.8 to 150						
	69/70...	orange/orange		8.2 to 330						
655	09...	yellow	2	100 to 4700	500	-	>13	2e	loose	219
	19...	yellow					4 ±0.5		loose	
	53...	yellow					-		tape on reel	
	63...	yellow					-		armopack	
678	03/04...	red/violet	1	0.56 to 47	100	18.25	-	1e	tape on reel	184
	09/10...	black		1.8 to 220						
	33/34...	orange		3.9 to 220						
	57/58...	violet		3.9 to 330						
	70...	orange/orange		18 to 560						
90...	NP0	black		1 to 240						176

Miniature ceramic plate capacitors

Numerical index

12NC 2222	TC	COLOUR CODE	CLASS	CAPACITANCE RANGE (pF)	$U_{R(DC)}$ (V)	H_0 (mm)	LEAD LENGTH (mm)	PITCH	PACKAGING	PAGE
679	03/04... P100	red/violet	1	0.56 to 47	100	18.25	-	2e	tape on reel	184
	09/10... NP0	black		1.8 to 220						
	33/34... N150	orange		3.9 to 220						
	57/58... N750	violet		3.9 to 330						
	70... N1500	orange/orange		18 to 560						
	90... NP0	black		1 to 240						
680	03/04... P100	red/violet	1	0.56 to 47	100	-	>13	1e	loose	184
	09/10... NP0	black		1.8 to 220						
	33/34... N150	orange		3.9 to 220						
	57/58... N750	violet		3.9 to 330						
	70... N1500	orange/orange		18 to 560						
	90... NP0	black		1 to 240						
681	03/04... P100	red/violet	1	0.56 to 47	100	-	>13	2e	loose	184
	09/10... NP0	black		1.8 to 220						
	33/34... N150	orange		3.9 to 220						
	57/58... N750	violet		3.9 to 330						
	70... N1500	orange/orange		18 to 560						
	90... NP0	black		1 to 240						
682	03/04... P100	red/violet	1	0.56 to 47	100	-	4 ±0.5	1e	loose	184
	09/10... NP0	black		1.8 to 220						
	33/34... N150	orange		3.9 to 220						
	57/58... N750	violet		3.9 to 330						
	70... N1500	orange/orange		18 to 560						
	90... NP0	black		1 to 240						
683	03/04... P100	red/violet	1	0.56 to 47	100	-	4 ±0.5	2e	loose	184
	09/10... NP0	black		1.8 to 220						
	33/34... N150	orange		3.9 to 220						
	57/58... N750	violet		3.9 to 330						
	70... N1500	orange/orange		18 to 560						
	90... NP0	black		1 to 240						

Miniature ceramic plate capacitors

Numerical index

12NC 2222	TC	COLOUR CODE	CLASS	CAPACITANCE RANGE (pF)	$U_{R(DC)}$ (V)	H_0 (mm)	LEAD LENGTH (mm)	PITCH	PACKAGING	PAGE
686	03/04...	red/violet	1	0.56 to 47	100	16	-	1e	ammopack	184
	09/10...	black		1.8 to 220						
	27/28...	red		3.9 to 120						
	33/34...	orange		3.9 to 220						
	39/40...	yellow		3.9 to 150						
	45/46...	green		4.7 to 180						
	51/52...	blue		6.8 to 220						
	57/58...	violet		3.9 to 330						
	70...	orange/orange		18 to 560						
	90...	black		1 to 240						
688	03/04...	red/violet	1	0.56 to 47	100	18.25	-	1e	ammopack	184
	09/10...	black		1.8 to 220						
	33/34...	orange		3.9 to 220						
	57/58...	violet		3.9 to 330						
	70...	orange/orange		18 to 560						
	90...	black		1 to 240						
	03/04...	red/violet		0.56 to 47						
	09/10...	black		1.8 to 220						
	33/34...	orange		3.9 to 220						
	57/58...	violet		3.9 to 330						
689	03/04...	red/violet	1	0.56 to 47	100	18.25	-	2e	ammopack	184
	09/10...	black		1.8 to 220						
	33/34...	orange		3.9 to 220						
	57/58...	violet		3.9 to 330						
	70...	orange/orange		18 to 560						
	90...	black		1 to 240						
	03/04...	red/violet		0.47 to 33						
	09/10...	black		0.82 to 150						
	33/34...	orange		2.2 to 150						
	57/58...	violet		1.8 to 150						
691	69/70...	orange/orange	1	8.2 to 330	500	18.25	-	2e	ammopack	208

Miniature ceramic plate capacitors






Numerical index

12NC 2222	TC	COLOUR CODE	CLASS	CAPACITANCE RANGE (pF)	$U_{R(DC)}$ (V)	H_0 (mm)	LEAD LENGTH (mm)	PITCH	PACKAGING	PAGE
693	2C2-2E1 (X5S/X7T)	yellow	2	100 to 1200	1000	18.25	>13	2e	loose	227
							4 ±0.5		loose	
							—		tape on reel	
							—		ammopack	
694	SL	—	1	0.47 to 120	1000	—	>13	2e	loose	222
						—	4 ±0.5		loose	
						18.25	—		tape on reel	
						18.25	—		ammopack	
						16	—		ammopack	
695	2E2 (X5U)	blue	2	270 to 3300	1000	—	>13	2e	loose	232
						—	4 ±0.5		loose	
						18.25	—		tape on reel	
						18.25	—		ammopack	

Miniature ceramic plate capacitors

Selection guide

SELECTION GUIDE FOR MINIATURE CERAMIC PLATE CAPACITORS

PACKAGE OUTLINE	TC	$U_{R(DC)}$ (V)	CAP. RANGE (pF)	CAP. TOL.	CATALOGUE NUMBERS 2222	CLIMATIC CATEGORY	TYPICAL CIRCUITS	TARGET APPLICATION	PAGE
Class 1, standard types, leads with flanges									
	P100; NP0; N1500	100	0.56 to 560	± 0.25 pF $\pm 2\%$	678 ... to 683 ...; 688 ...; 689 ...	55/125/56	high frequency; tuning; temperature compensation; precision clocking; high stability	general industrial; consumer; automotive	184
						N150; N750	55/085/21		
	P100; NP0; N1500	500	0.47 to 330	± 0.25 pF $\pm 2\%$	652 ... to 654 ...; 691 ...	55/150/56	high frequency; SMPS; power supplies; temperature compensation; precision clocking; high stability	general industrial; consumer; automotive	208
						N150; N750	55/085/21		
	SL	1000	0.47 to 120	± 0.25 pF $\pm 5\%$	694 09...; 694 19...; 694 53...; 694 63...	55/150/56	SMPS; HV systems; HV power supplies; high stability	high stress circuits; high stress automotive; professional circuits; measuring instruments	222
Class 1, precision types, leads with flanges									
	NP0	100	0.82 to 240	± 0.1 pF $\pm 1\%$	678 90... to 683 90...; 688 90...; 689 90...	55/125/56	high frequency; tuning; precision clocking; high stability	high stress circuits; high stress automotive	176
	NP0	500	0.82 to 150	± 0.1 pF $\pm 1\%$	652 90... to 654 90...; 691 90...; note 1	55/125/56	SMPS; power supplies; high frequency; tuning; high stability	high stress circuits; high stress automotive	208



Note

1. Available on request.

Miniature ceramic plate capacitors


Selection guide

SELECTION GUIDE FOR MINIATURE CERAMIC PLATE CAPACITORS (continued)

PACKAGE OUTLINE	TC	U _{R(DC)} (V)	CAP. RANGE (pF)	CAP. TOL.	CATALOGUE NUMBERS 2222	CLIMATIC CATEGORY	TYPICAL CIRCUITS	TARGET APPLICATION	PAGE
	2C2 (X5S/X7T)	100	180 to 6800	±10%	630 08...; 630 18...; 630 09...; 630 19...; 630 51...; 630 61...; 630 53...; 630 63...	55/125/56	coupling/decoupling; filtering; high stability	high stress circuits; high stress automotive; professional circuits; measuring instruments	193
	2F6 (Y5V)	63	1000 to 47000	-20/+80%	629 08...; 629 18...; 629 09...; 629 19...; 629 51...; 629 61...; 629 53...; 629 63...	10/085/21	general purpose; coupling/decoupling; filtering; low stability	general industrial; consumer	193

Miniature ceramic plate capacitors

Selection guide

PACKAGE OUTLINE	TC	$U_{R(DC)}$ (V)	CAP. RANGE (pF)	CAP. TOL.	CATALOGUE NUMBERS 2222	CLIMATIC CATEGORY	TYPICAL CIRCUITS	TARGET APPLICATION	PAGE
	2C2 (X5S/X7T)	1000	100 to 1200	±10%	693 09...; 693 19...; 693 53...; 693 63...	55/150/56	SMPS; HV systems; HV power supplies; coupling/decoupling; filtering; high stability	high stress circuits; high stress automotive; professional circuits; measuring instruments	227
	2E2 (X5U)	1000	270 to 3300	±20%	695 09...; 695 19...; 695 53...; 695 63...	55/105/56	SMPS; HV systems; HV power supplies; coupling/decoupling; filtering; medium stability	high stress circuits; high stress automotive; professional circuits; measuring instruments	232

Miniature ceramic plate capacitors

General data

CURRENT AND MAINTENANCE TYPES

Current ceramic plate capacitors have leads provided with a flange. They are available in a wide variety of executions. The flange ensures excellent solderability and component height definition on the printed-circuit boards. These capacitors are suitable for both hand mounting and automatic insertion.

Ceramic plate capacitors **without flanged leads** are **not** for design-in. They are for maintenance purposes only. They are not available on tape.

The electrical properties of capacitors with flanged leads are the same as the electrical properties of capacitors with straight leads.

TC DEFINITION AND RELEVANT CODES

The variation of capacitance with temperature is determined by:

1. Temperature coefficient of capacitance.
2. Temperature characteristic of capacitance.

The temperature coefficient of capacitance is applicable to class 1 capacitors. They show a predictable and almost linear change of capacitance with temperature.

This makes them suitable for temperature compensation in resonant and tuning circuits (N150 to N1500), and in all critical applications which require a very small capacitance change with temperature (NP0).

The dielectric number indicates the nominal value of the temperature coefficient of capacitance with the letters 'P' or 'N' indicating a positive or negative capacitance change with the temperature. For example, P100 indicates a positive temperature coefficient of $100 \times 10^{-6}/^{\circ}\text{C}$ and N750 indicates a negative temperature coefficient of $750 \times 10^{-6}/^{\circ}\text{C}$. In accordance with "RS198", the P100 is identified with the code M7G and the N750 with the code U2J.

The temperature characteristic of capacitance is specified by means of letters and numbers denoting the maximum permissible capacitance change from 20 °C over a specified temperature range. The "EIA publication RS198" has a similar coding system but the reference temperature is 25 °C.

Tables 1 and 2 show the temperature characteristic of capacitance in accordance with "IEC 384-9" and "RS198" respectively.

Table 3 shows the temperature coefficient codes in accordance with "RS198".

As an example, a capacitor with a capacitance change of -56 to +20% in the temperature range from -55 to +85 °C will be defined as a class 2E2 capacitor in accordance with "IEC 384-9" and X5U in accordance with "RS198".

Also, a capacitor with a temperature change of 0 ± 30 ppm will be defined as COG in accordance with "RS198" (see Table 3) and NP0 in accordance with "IEC 384-8".

Miniature ceramic plate capacitors

General data

Table 1 Temperature characteristic of capacitance in accordance with "IEC 384-9"



SUB-CLASS LETTER CODE	$\Delta C/C$ at 20 °C (%)		PREFERRED CATEGORY TEMPERATURE RANGE (P) AND CORRESPONDING NUMBER CODE				
	WITHOUT DC VOLTAGE APPLIED	WITH RATED DC VOLTAGE APPLIED	-55/+125 °C	-55/+85 °C	-40/+85 °C	-25/+85 °C	-10/+85 °C
			1	2	3	4	6
2B	±10	+10/-15	-	P	P	P	-
2C	±20	+20/-30	P	P	P	-	-
2D	+20/-30	+20/-40	-	-	-	P	-
2E	+22/-56	+22/-70	-	P	P	P	P
2F	+30/-80	+30/-90	-	P	P	P	P
2R	±15	+15/-40	P	-	-	-	-
2X	±15	+15/-25	P	-	-	-	-

Table 2 Temperature characteristics in accordance with "RS198"

FIRST DIGIT IS MINIMUM TEMPERATURE CODE	SECOND DIGIT IS MAXIMUM TEMPERATURE CODE	LAST DIGIT IS RELATED TO $\Delta C/C$ at 25 °C (%)
X = -55 °C	5 = +85 °C	F = ±7.5
Y = -30 °C	6 = +105 °C	P = ±10
Z = +10 °C	7 = +125 °C	R = ±15
-	8 = +150 °C	S = ±22
-	9 = +200 °C	T = -33 to +22
-	-	U = -56 to +22
-	-	V = -82 to +22

Table 3 Temperature coefficient in accordance with "RS198"

SIGNIFICANT FIGURES	MULTIPLIER	TOLERANCE ppm (°C)
C = 0.0	0 = -1	G = ±30
M = 1	1 = -10	H = ±60
P = 1.5	2 = -100	J = ±120
R = 2.2	3 = -1000	K = ±250
S = 3.3	5 = +1	L = ±500
T = 4.7	6 = +10	M = ±1000
U = 7.5	7 = +100	N = ±2500
-	8 = +1000	-

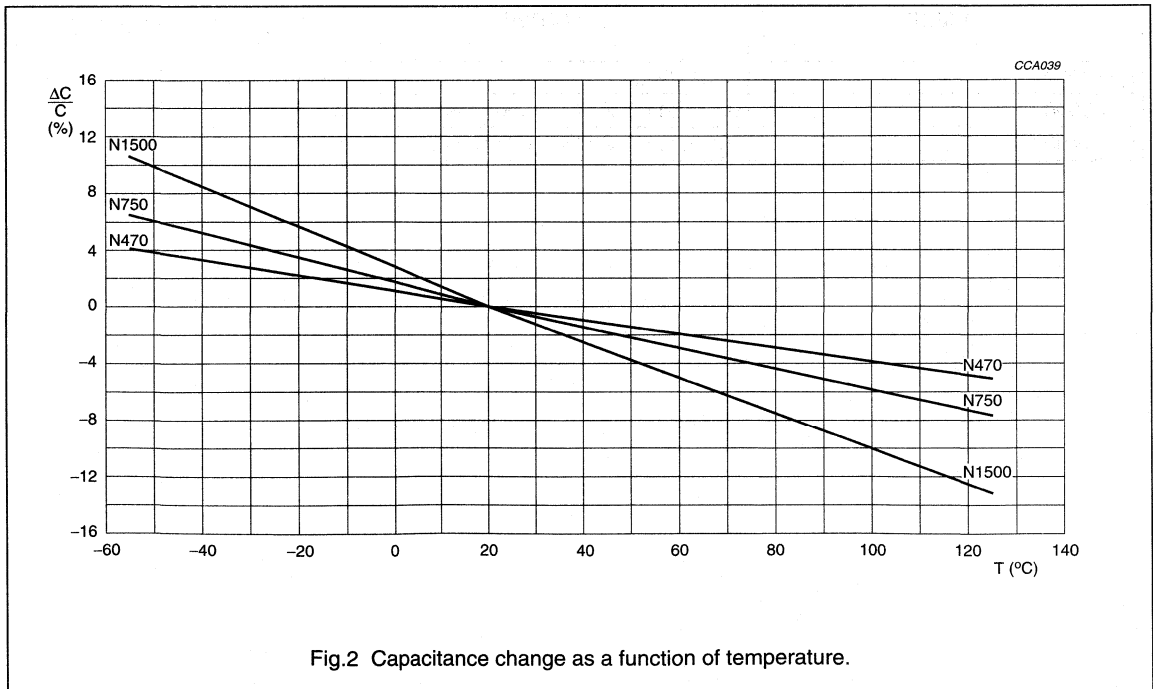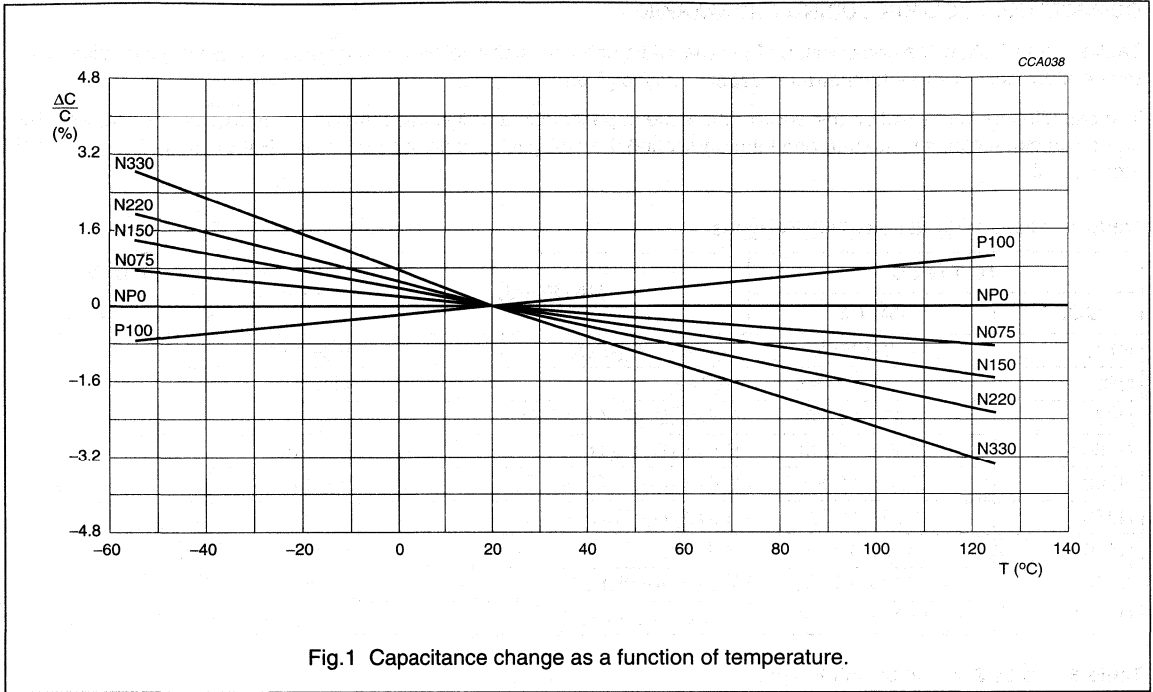

Miniature ceramic plate capacitors

General data

COMPOSITION, COLOUR CODING AND MARKING

Tables 4 and 5 show the composition of the materials used in ceramic plate capacitors. Colour coding indicating the temperature coefficient or temperature dependency is given.

The capacitance is marked on the body of the plate capacitors in a 3-digit code: two numbers corresponding with the numerical capacitance value and one letter indicating the multiplier and the decimal point. For example: 1p0 = 1.0 pF, 22n = 22 nF.

Table 4 Class 1: $\epsilon_r = 6$ up to 250; TC types

TC TYPES		MATERIAL	COLOUR CODES	
CODE	VALUE		TC	BODY
P100	$+100 \times 10^{-6}/K$	$MgTiO_3, Mg_2SiO_4$	red-violet	grey
NP0	$0 \times 10^{-6}/K$	$MgTiO_3$	black	
N075	$-75 \times 10^{-6}/K$	$BaNd_2(Bi_2)Ti_5O_x + TiO_2$	red	
N150	$-150 \times 10^{-6}/K$	$BaNd_2(Bi_2)Ti_5O_x + TiO_2$	orange	
N220	$-220 \times 10^{-6}/K$	$BaNd_2(Bi_2)Ti_5O_x + TiO_2$	yellow	
N330	$-330 \times 10^{-6}/K$	$BaNd_2(Bi_2)Ti_5O_x + TiO_2$	green	
N470	$-470 \times 10^{-6}/K$	$BaNd_2(Bi_2)Ti_5O_x + TiO_2$	blue	
N750	$-750 \times 10^{-6}/K$	$TiO_2 + \text{additions}$	violet	
N1500	$-1500 \times 10^{-6}/K$	$CaTiO_3 + \text{additions}$	orange/orange	

Table 5 Class 2: $\epsilon_r > 250$; high-K types

ϵ_r VALUE	MATERIAL	COLOUR CODES	
		TC	BODY
$\epsilon_r = 2000$	$Ba(Bi)TiO_3$	yellow	tan
$\epsilon_r = 5000$	$(Ba, Ca) (Ti, Zr) O_3 + \text{additions}$	blue	
$\epsilon_r = 14000$	$(Ba, Ca) (Ti, Zr) O_3 + \text{additions}$	green	

Miniature ceramic plate capacitors

General data


PACKAGING

The miniature ceramic plate capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack (see Table 6).

Table 6 Packaging quantities

SIZE CODE	PACKAGING QUANTITIES		
	BOX	REEL	AMMOPACK
I, IIA, IIB (excluding 1000 V)	1000	4000	4000
III, IV, V (with lead length ≤6 mm) (excluding 1000 V)	1000	—	—
III, IV, V (with lead length >6 mm) (excluding 1000 V)	500	4000	4000
III (500 V with lead length >6 mm) (excluding 1000 V)	500	4000	4000
IV, V (500 V with lead length >6 mm) (excluding 1000 V)	500	4000	2000
I, IIA, IIB, III, IV, V (1000 V with lead length >6 mm)	500	2000	2000
I, IIA, IIB, III, IV (1000 V with lead length ≤6 mm)	1000	—	—
V (1000 V with lead length ≤6 mm)	500	—	—

CAPACITORS ON TAPE, LEAD PITCH 5.08 mm (0.2 inch)

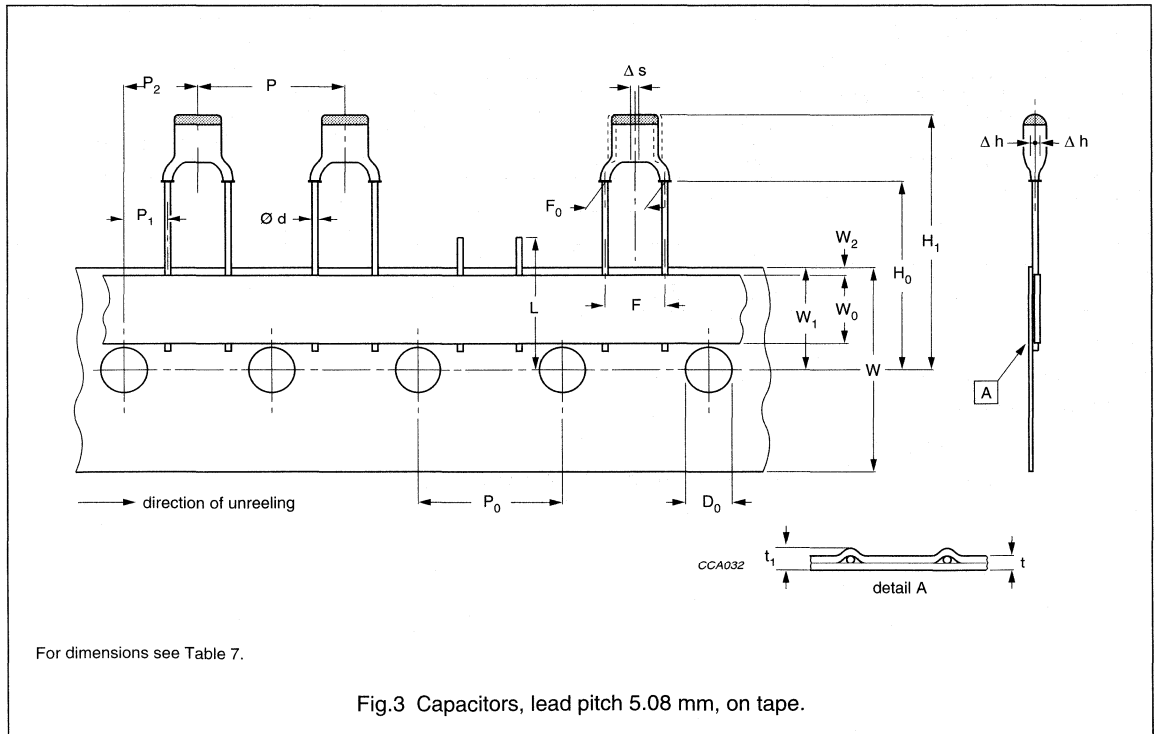

Miniature ceramic plate capacitors

General data

Table 7 Dimensions of tape; see Fig.3


SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
d	lead diameter	0.6	+0.6 -0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.2; note 1
P ₁	feed-hole centre to lead centre	3.85	±0.5; note 2
P ₂	feed-hole centre to component centre	6.35	±0.7; note 2
F	lead-to-lead	5.0	+0.6 -0.1
F ₀	lead-to-lead	5.08	+0.5 -0.1
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	±0.5
W ₀	hold-down tape width	6.0	±0.5
W ₁	hole position	9.0	±0.5
W ₂	hold-down tape position	0	±2
H ₀	flange to tape centre	18.25 (16.0); note 3	±0.5
H ₁	maximum component height	31 (28.75); note 4	–
	minimum component height	22 (18.75); note 4	–
L	maximum length of snipped lead	11	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.65	±0.2
t ₁	maximum thickness of tape and wires	1.5	–

Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.
3. H₀ = 16 mm also available.
4. Values between parentheses are referred to component height when H₀ = 16 mm.

Miniature ceramic plate capacitors

General data

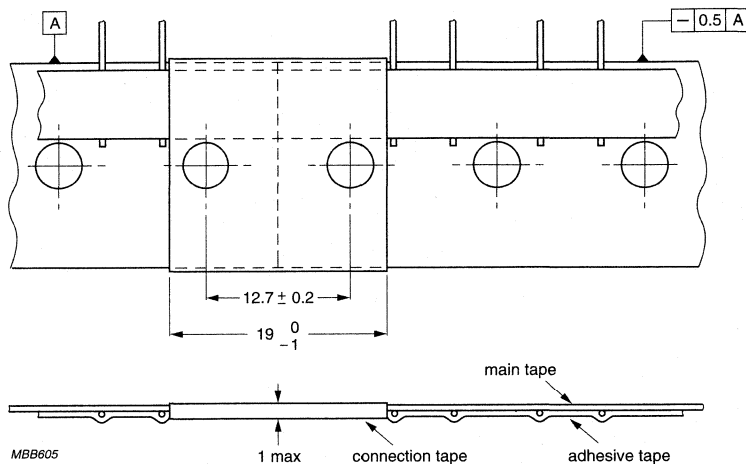


Dimensions in mm.

Maximum 0.5% of the total number of capacitors per reel may be missing. A maximum of 3 consecutive vacant positions is followed by at least 6 consecutive components. The tape begins and ends with 5 empty positions.

Fig.4 Connection of tapes, lead pitch 5.08 mm.


Table 8 Properties of the tape

PARAMETER	MIN.	MAX.	UNIT
Extraction force for component in the tape plane, vertically to direction of unreeling	5	–	N
Break force of tape	15	–	N
Pull-off force adhesive tape from main tape	–	2.5	N

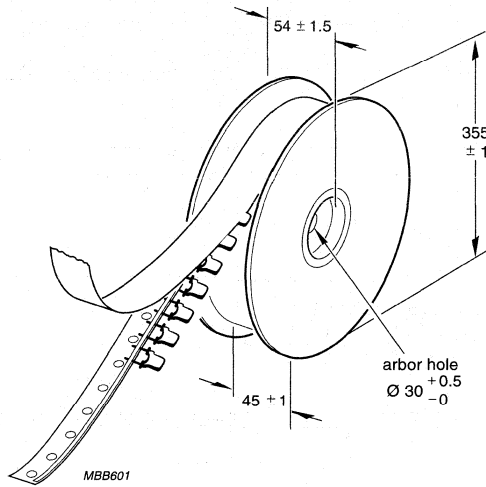

Dimensions in mm.


Fig.5 Reel with capacitors on tape.

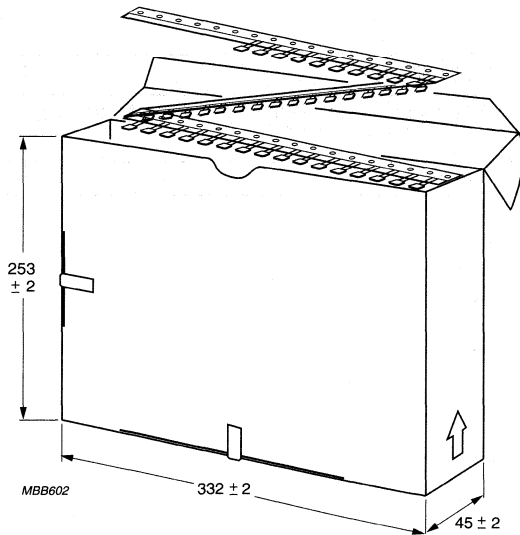

Dimensions in mm.

Fig.6 Ammopack with capacitors on tape.

CAPACITORS ON TAPE, LEAD PITCH 2.54 mm (0.1 inch)

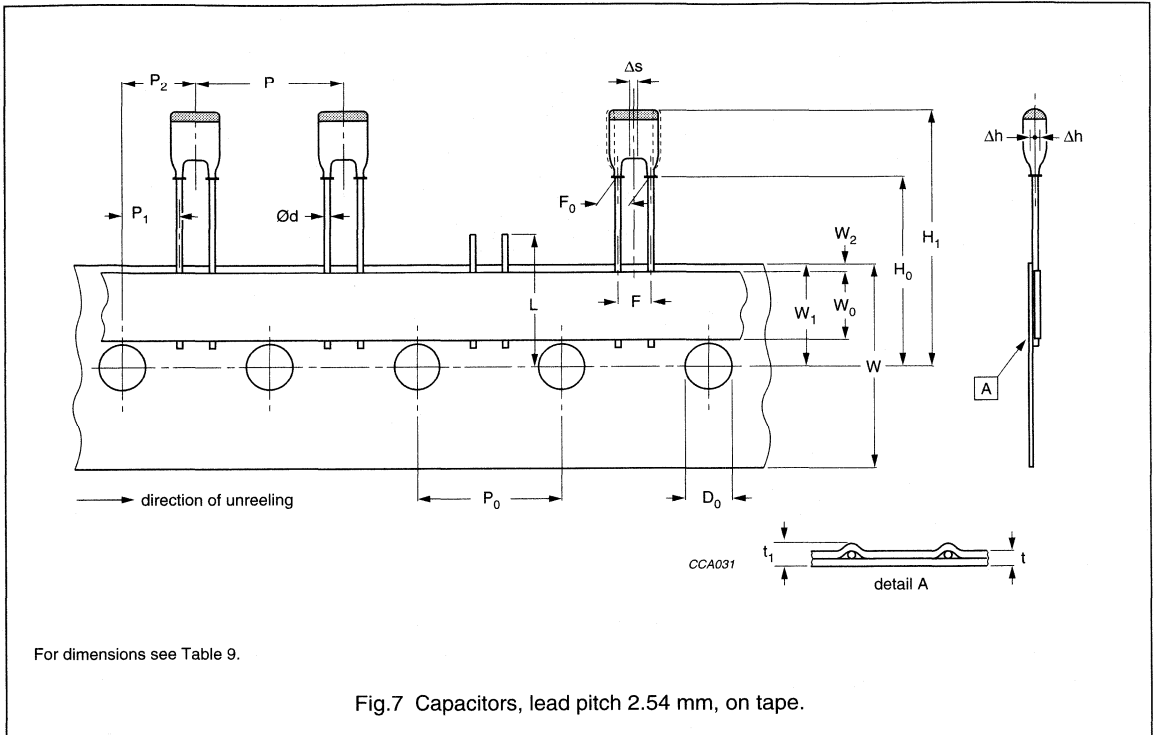

For dimensions see Table 9.

Fig.7 Capacitors, lead pitch 2.54 mm, on tape.

Miniature ceramic plate capacitors

General data

Table 9 Dimensions of tape; see Fig.7


SYMBOL	PARAMETER	DIMENSIONS (mm)	
		NOMINAL	TOLERANCE
d	lead diameter	0.6	+0.6 -0.05
P	pitch between capacitors	12.7	±1.0
P ₀	feed-hole pitch	12.7	±0.2; note 1
P ₁	feed-hole centre to lead centre	5.1	±0.5; note 2
P ₂	feed-hole centre to component centre	6.35	±0.7; note 2
F	lead-to-lead	2.54	±0.3
F ₀	lead-to-lead	2.54	±0.3
Δh	component alignment	0	±1.0
Δs	deviation along tape, left or right	0	±0.6
W	tape width	18.0	±0.5
W ₀	hold-down tape width	6.0	±0.5
W ₁	hole position	9.0	±0.5
W ₂	hold-down tape position	0	±2
H ₀	flange to tape centre	18.25 (16.0); note 3	±0.5
H ₁	maximum component height	30 (27.75); note 4	–
	minimum component height	21 (18.75); note 4	–
L	maximum length of snipped lead	11	–
D ₀	feed-hole diameter	4.0	±0.2
t	total tape thickness	0.65	±0.2
t ₁	maximum thickness of tape and wires	1.5	–

Notes

1. Cumulative pitch error: ± 1 mm/20 pitches.
2. Obliquity maximum 3°.
3. H₀ = 16 mm also available.
4. Values between parentheses are referred to component height when H₀ = 16 mm.

Miniature ceramic plate capacitors

General data

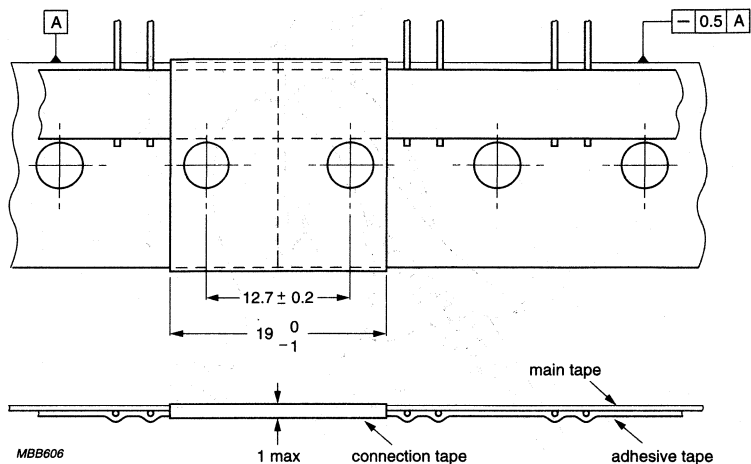

Dimensions in mm.

Maximum 0.5% of the total number of capacitors per reel may be missing. A maximum of 3 consecutive vacant positions is followed by at least 6 consecutive components. The tape begins and ends with 5 empty positions.


Fig.8 Connection of tapes, lead pitch 2.54 mm.

Table 10 Properties of the tape

PARAMETER	MIN.	MAX.	UNIT
Extraction force for component in the tape plane, vertically to direction of unreeling	5	–	N
Break force of tape	15	–	N
Pull-off force adhesive tape from main tape	–	2.5	N


Miniature ceramic plate capacitors

General data

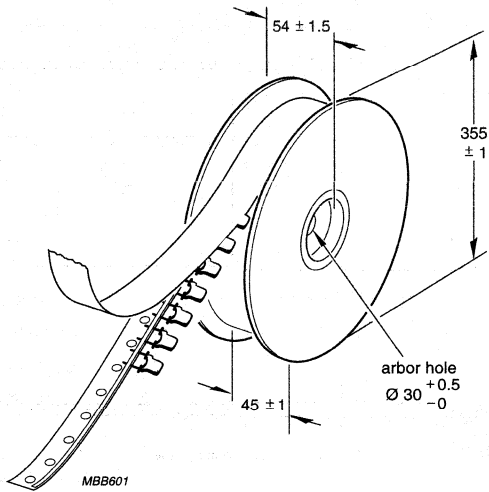

Dimensions in mm.

Fig.9 Reel with capacitors on tape.

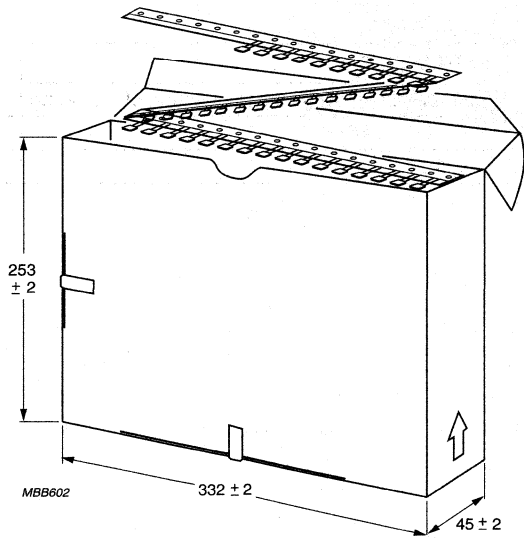

Dimensions in mm.





Fig.10 Ammpack with capacitors on tape.

Miniature ceramic plate capacitors

General data

LABELLING

The label on the package containing the capacitors is as shown.

1.	MADE IN ITALY	LINE MARKING EXPLANATION
2.	10PF +/-2% NPO 100VDC 2.54 13	1. Country of origin
		2. Capacitance value, tolerance, dielectric class (note 1), rated voltage, lead spacing and lead length (note 2)
3.	 ORIG A520 RPC IE	3. Country of origin and responsible production centre codes; A520 is Italy
		4. Quantity and date code
4.	 QTY 1000 DATE 96155	5. Commercial type number
		6. Catalogue number (12NC)
5.	 TYPE CPC C1 100V 10P	Notes
		1. Temperature coefficient for Class 1 capacitors; temperature characteristics for Class 2 capacitors.
6.	 CODENO 2222 680 10109	2. Lead length is not shown on taped versions.

CCA095

Fig.11 Packaging label (example).

Miniature ceramic plate capacitors

General data

TESTS AND REQUIREMENTS

Class 1 capacitors

After manufacture, each capacitor is checked on capacitance, $\tan \delta$ and test voltage. Apart from this the following quality checks are carried out by frequent inspections.

Essentially all tests mentioned in the schedule of "IEC publication 384-8", category as specified for each product family are carried out in accordance with "IEC publication 68".

Table 11 Test procedures and requirements

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4	Ua ₁ Ub	robustness of terminations: pull-off tensile strength bending	pull velocity 15 cm/minute; load 5 N axial force 10 N load 5 N; 4 × 90°	no lead breakage no lead breakage no lead breakage
4.6	Ta method 1	solderability (solder bath)	235 °C; 2 s	good tinning
4.5	Tb method 1A	resistance to soldering heat	260 °C; 10 s	no visible damage $\Delta C/C: \pm \leq 0.5\%$ or ± 0.5 pF after 1 to 2 hours
4.7	Na	rapid change of temperature	30 minutes at -55 °C and 30 minutes at +85 °C; 5 cycles (+125 °C for P100, NP0 and N1500 with $U_{R(DC)} = 100$ V; +150 °C for 2222 694, P100, NP0 and N1500 with $U_{R(DC)} = 500$ V)	no damage, after 24 hours $\Delta C/C: \pm \leq 0.5\%$ or ± 0.5 pF
4.8	Fc	vibration	10 to 55 to 10 Hz; 0.75 mm displacement; 3 directions; 6 hours	no visible damage
4.9	Eb	bump	4000 bumps in 2 directions; 40 g; pulse time 6 ms	no visible damage
		inflammability	15 s; 35 mm above bunsen burner with flame height 40 to 60 mm	self-extinguishing within 15 seconds after removal of bunsen burner
4.3		temperature coefficient	between +20 and -55 °C and between +20 and +85 °C	within tolerance as specified for each particular material

Miniature ceramic plate capacitors

General data

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.11		climatic sequence:		
4.11.2	B	dry heat	16 hours; +85 °C (+125 °C for P100, NP0 and N1500 with $U_{R(DC)} = 100$ V; +150 °C for 2222 694, P100, NP0 and N1500 with $U_{R(DC)} = 500$ V)	no visible damage
4.11.3	Db	damp heat (accelerated) 1 st cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	no visible damage; after recovery of 1 to 2 hours immediately followed by cold test
4.11.4	A	cold	2 hours; -55 °C	no visible damage
4.11.5	M	low air pressure	1 hour; 8,5 kPa, last 2 minutes rated voltage	no breakdown or flashover
4.11.6	Db	damp heat (accelerated) remaining cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >5000 M Ω for 2222 650 to 654/691/692/694 >100 M Ω for other types
4.12	Ca	damp heat, steady state (half number of the lot at rated voltage, other half at zero voltage)	21 days; +40 °C; 90 to 95% RH	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >5000 M Ω for 2222 650 to 654/691/692/694 >100 M Ω for other types
4.13		endurance	1000 hours at +85 °C (+125 °C for P100, NP0 and N1500 with $U_{R(DC)} = 100$ V; +150 °C for 2222 694, P100, NP0 and N1500 with $U_{R(DC)} = 500$ V); 2222 694: 1500 V (DC) 2222 650 to 654/691/692: 750 V (DC) other types: 150 V (DC)	$\Delta C/C$: $\pm 1\%$ or ± 1 pF $\tan \delta$: $\leq 1.5 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >3000 M Ω for 2222 650 to 654/691/692/694 >300 M Ω for other types
		resistance to solvents	3 minutes ultrasonic washing in trichloroethylene; 1 minute drying; 30 °C; 10 brush strokes	marking and colour code must remain legible and not be discoloured; no mechanical or electrical damage or deterioration of the material

Miniature ceramic plate capacitors

General data

Class 1 precision capacitors NP0

After manufacture, each capacitor is checked on capacitance, $\tan \delta$ and test voltage. Apart from this the following quality checks are carried out by frequent inspections.

Essentially all tests mentioned in the schedule of "IEC publication 384-8", category 55/125/56 (temperature range $-55/+125$ °C; damp heat, long term, 56 days) are carried out in accordance with "IEC publication 68".

Table 12 Test procedures and requirements

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4	Ua ₁ Ub	robustness of terminations: pull-off tensile strength bending	pull velocity 15 cm/minute; load 5 N axial force 10 N load 5 N; $4 \times 90^\circ$	no lead breakage no lead breakage no lead breakage
4.6	Ta method 1	solderability (solder bath)	235 °C; 2 s	good tinning
4.5	Tb method 1A	resistance to soldering heat	260 °C; 10 s	no visible damage $\Delta C/C$ after 1 to 2 hours: $\pm \leq 0.5\%$ or ± 0.5 pF
4.7	Na	rapid change of temperature	30 minutes at -55 °C and 30 minutes at $+150$ °C; 5 cycles	no damage $\Delta C/C$ after 24 hours: $\pm \leq 0.5\%$ or ± 0.5 pF
4.8	Fc	vibration	10 to 55 to 10 Hz; 0.75 mm displacement; 3 directions; 6 hours	no visible damage
4.9	Eb	bump	4000 bumps in 2 directions; 40 g; pulse time 6 ms	no visible damage
		inflammability	15 s; 35 mm above bunsen burner with flame height 40 to 60 mm	self-extinguishing within 15 seconds after removal of bunsen burner
4.3		temperature coefficient	between $+20$ and -55 °C and between $+20$ and $+125$ °C	within tolerance as specified

Miniature ceramic plate capacitors

General data

IEC 384-8 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.11		climatic sequence:		
4.11.2	B	dry heat	16 hours; +150 °C	no visible damage
4.11.3	Db	damp heat (accelerated) 1 st cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	no visible damage; after recovery of 1 to 2 hours immediately followed by cold test
4.11.4	A	cold	2 hours; -55 °C	no visible damage
4.11.5	M	low air pressure	1 hour; 8.5 kPa, last 2 minutes rated voltage	no breakdown or flashover
4.11.6	Db	damp heat (accelerated) remaining cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	$\Delta C/C$: $\pm \leq 1\%$ or ± 1 pF whichever is greater $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >1000 M Ω
4.12	Ca	damp heat, steady state (half number of the lot at rated voltage, other half at zero voltage)	56 days; +40 °C; 90 to 95% RH	$\Delta C/C$: $\pm \leq 1\%$ or ± 1 pF whichever is greater $\tan \delta$: $\leq 2 \times$ specified $\tan \delta$ R_{ins} after 1 to 2 hours: >1000 M Ω
4.13		endurance	1 000 hours at +150 °C, 1.5 \times rated voltage; (+125 °C for P100, NP0 and N1500 with $U_{R(DC)} = 100$ V; +150 °C for 2222 694, P100, NP0 and N1500 with $U_{R(DC)} = 500$ V)	$\Delta C/C$: $\pm \leq 1\%$ or ± 1 pF whichever is greater $\tan \delta$: $\leq 1.5 \times$ specified $\tan \delta$ R_{ins} : >3000 M Ω
		resistance to solvents	3 minutes ultrasonic washing in trichloroethylene; 1 minute drying; 30 °C; 10 brush strokes	marking and colour code must remain legible and not be discoloured; no mechanical or electrical damage or deterioration of the material

Miniature ceramic plate capacitors

General data

Class 2 capacitors

After manufacture, each capacitor is checked on capacitance, $\tan \delta$ and test voltage. Apart from this the following quality checks are carried out by frequent inspections.

Essentially all tests mentioned in the schedule of "IEC publication 384-9", category as specified for each product family, are carried out in accordance with "IEC publication 68".

Table 13 Test procedures and requirements

IEC 384-9 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.1		pre-conditioning	1 hour; +150 °C; reference measurement after 24 hours	
4.5	Ua ₁ Ub	robustness of terminations: pull-off tensile strength bending	pull velocity 15 cm/minute; load 5 N axial force 10 N load 5 N; 4 × 90°	no lead breakage no lead breakage no lead breakage
4.7	Ta method 1	solderability (solder bath)	235 °C; 2 s	good tinning
4.6	Tb method 1A	resistance to soldering heat	pre-conditioning: 260 °C; 10 s	no visible damage $\Delta C/C$ after 24 hours: 2222 630: $\pm \leq 10\%$ 2222 629/640/695: $\pm \leq 20\%$ 2222 655/693: $\pm 10\%$
4.8	Na	rapid change of temperature	pre-conditioning: 2222 630/655/693/695: 30 minutes at -55 °C and 30 minutes at +85 °C (+125 °C for 630; +105 °C for 640/695; +150 °C for 655/693); 2222 629: 30 minutes at -10 °C and 30 minutes at +85 °C; 5 cycles	no damage $\Delta C/C$ after 24 hours: 2222 630/655/693: $\pm \leq 10\%$ 2222 629/640/695: $\pm \leq 20\%$
4.9	Fb	vibration	10 to 55 to 10 Hz; 0.75 mm displacement; 3 directions; 6 hours	no visible damage
4.10	Eb	bump	4000 bumps in 2 directions; 40 g; pulse time 6 ms	no visible damage
		inflammability	15 s; 35 mm above bunsen burner with flame height 40 to 60 mm	self-extinguishing within 15 s after removal of bunsen burner
		resistance to solvents	3 minutes ultrasonic washing in trichloroethylene; 1 minute drying, 30 °C; 10 brush strokes	marking and colour code must remain legible and not be discoloured; no mechanical or electrical damage or deterioration of the material

Miniature ceramic plate capacitors

General data

IEC 384-9 CLAUSE	IEC 68-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.12 4.12.1 4.12.2	Ba	climatic sequence: pre-conditioning dry heat	1 hour; +150 °C 16 hours at: +85 °C for 2222 629; +105 °C for 2222 640/695; +125 °C for 2222 630; +150 °C for 2222 655/693	no visible damage
4.12.3	Db	damp heat (accelerated) 1 st cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	no visible damage; after recovery of 1 to 2 hours immediately followed by cold test
4.12.4	Aa	cold	2222 630/640/655/693/695: 2 hours; -55 °C; 2222 629: 2 hours; -10 °C	no visible damage
4.12.5	M	low air pressure	1 hour at 8.5 kPa, last 2 minutes rated voltage	no breakdown or flashover
4.12.6	Db	damp heat (accelerated) remaining cycle	12 hours; +55 °C; 90 to 96% RH 12 hours; +25 °C; 95 to 100% RH	$\Delta C/C$ after 24 hours: 2222 630/655/693: $\pm\leq 10\%$ 2222 629/640/695: $\pm\leq 20\%$ tan δ : $\leq 7\%$ (2222 695: $< 2\%$) R_{ins} : 2222 629/630/640: $> 100 \text{ M}\Omega$ 2222 655/693/695: $> 1000 \text{ M}\Omega$
4.13	Ca	damp heat, steady state (half number of samples at rated voltage, other half of samples no voltage applied)	pre-conditioning: 2222 629/640: 21 days; +40 °C; 90 to 95% RH; 2222 630/655/693/695: 56 days; +40 °C; 90 to 95% RH	no visible damage $\Delta C/C$ after 24 hours: 2222 630/655/693: $\pm\leq 10\%$ 2222 629/640/695: $\pm\leq 20\%$ tan δ : $\leq 7\%$ (2222 695: $< 2\%$) R_{ins} : 2222 629/630/640: $> 100 \text{ M}\Omega$ 2222 655/693/695: $> 1000 \text{ M}\Omega$
4.14		endurance	pre-conditioning: 1000 hours (IEC) pre-conditioning: 2222 630: +125 °C; 150 V (DC) 2222 640: +105 °C; 150 V (DC) 2222 629: +85 °C; 100 V (DC) 2222 655: +150 °C; 750 V (DC) 2222 693: +150 °C; 1500 V (DC) 2222 695: +105 °C; 1500 V (DC)	$\Delta C/C$ after 24 hours: 2222 630/655/693: $\pm\leq 10\%$ 2222 629/640/695: $\pm\leq 20\%$ tan δ : $\leq 5\%$ (2222 629: $\leq 6.5\%$) (2222 695: $< 2\%$) R_{ins} : 2222 629/630/640: $> 300 \text{ M}\Omega$ 2222 655/693/695: $> 1000 \text{ M}\Omega$
4.4		temperature characteristic	pre-conditioning minimum and maximum temperature	in accordance with specification

Miniature ceramic plate capacitors

Clear text code

CLEAR TEXT ORDERING CODE

Product type

R plate capacitor

Capacitance (pF)

The first two digits are the significant figures of capacitance and the last digit is a multiplier as follows:

0	× 1
1	× 10
2	× 100
3	× 1000
9	× 0.1
8	× 0.01

Capacitance tolerance

B	±0.1 pF (NP0 precision cap. < 10 pF)
C	±0.25 pF (cap. < 10 pF)
G	±2% (class 1 for cap. ≥ 10 pF)
F	±1% (NP0 precision cap. ≥ 10 pF)
J	±5% (class 1 for cap. ≥ 10 pF)
K	±10% (class 2, Y5P)
M	±20% (class 2, X5U)
Z	+80%/-20% (class 2, Z5V)

Size code

Size	W _{max}	H _{max}
19	3.9 mm (0.152")	6.7 mm (0.254")
29	4.5 mm (0.177")	7.3 mm (0.288")
33	5.3 mm (0.208")	8.1 mm (0.319")
43	6.2 mm (0.244")	9.0 mm (0.354")
53	6.2 mm (0.244")	11.2 mm (0.441")

CCA945

Class code

AP class 1
SP class 2

Packaging

Code	Space	Length	Form	Packaging
WC	0.100"	0.500" min.	flange	bulk
WD	0.200"	0.167 ±0.020"	flange	bulk
WE	0.100"	0.167 ±0.020"	flange	bulk
WF	0.200"	0.500" min.	flange	bulk
WG	0.200"	H ₀ = 18 mm	flange	tape on reel
WH	0.100"	H ₀ = 18 mm	flange	tape on reel
WJ	0.200"	H ₀ = 18 mm	flange	ammopack
WK	0.100"	H ₀ = 18 mm	flange	ammopack

Rated voltage (DC)

F	50 V
H	100 V
L	500 V
N	1000 V

EIA TC codes

Code	TC	Marking
M7J	P100 ±30 ppm	class 1 red/violet
C0G	NP0 ±30 ppm	class 1 black
U1G	N075 ±30 ppm	class 1 red
P2G	N150 ±30 ppm	class 1 orange
R2G	N220 ±30 ppm	class 1 yellow
R2H	N330 ±60 ppm	class 1 green
T2H	N470 ±60 ppm	class 1 blue
U2J	N750 ±120 ppm	class 1 violet
P8K	N1500 +600/-0 ppm	class 1 orange/orange
U2M	+150 to -1500 ppm	class 1 nil
Y5P	±10%; -30 to +85 °C	class 2 yellow
X5U	+22/-58%; -55 to +85 °C	class 2 blue
Z5V	+22/-82%; -10 to +85 °C	class 2 green

PRODUCT DATA

Miniature ceramic plate capacitors

Precision capacitors NP0

FEATURES

- High-frequency circuits
- High reliability
- High stability
- Space saving.

APPLICATIONS

In a great variety of electronic circuits, e.g. in filters, tuning circuits and other professional applications where high stability, precision, reliability and low losses are a requirement. Because of their small size the capacitors are suitable for use in circuitry with high component density. The high reliability even in most demanding environmental conditions make the product suitable for automotive, telecommunications and other electronic circuits used at high temperatures.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized, and tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange, which guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion. The electrical properties are characterized by low losses, a very narrow tolerance on capacitance (± 0.1 pF or 1%), high stability and, owing to the absence of silver, an extremely good DC behaviour.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range (E24 series)	1 pF to 240 pF
Rated DC voltage	100 V; note 1
Tolerance on capacitance	C ≤ 10 pF: ± 0.1 pF; C > 10 pF: $\pm 1\%$
Sectional specification	IEC 384-8
Climatic category (IEC 68)	55/150/56

Note

1. 500 V available on request.




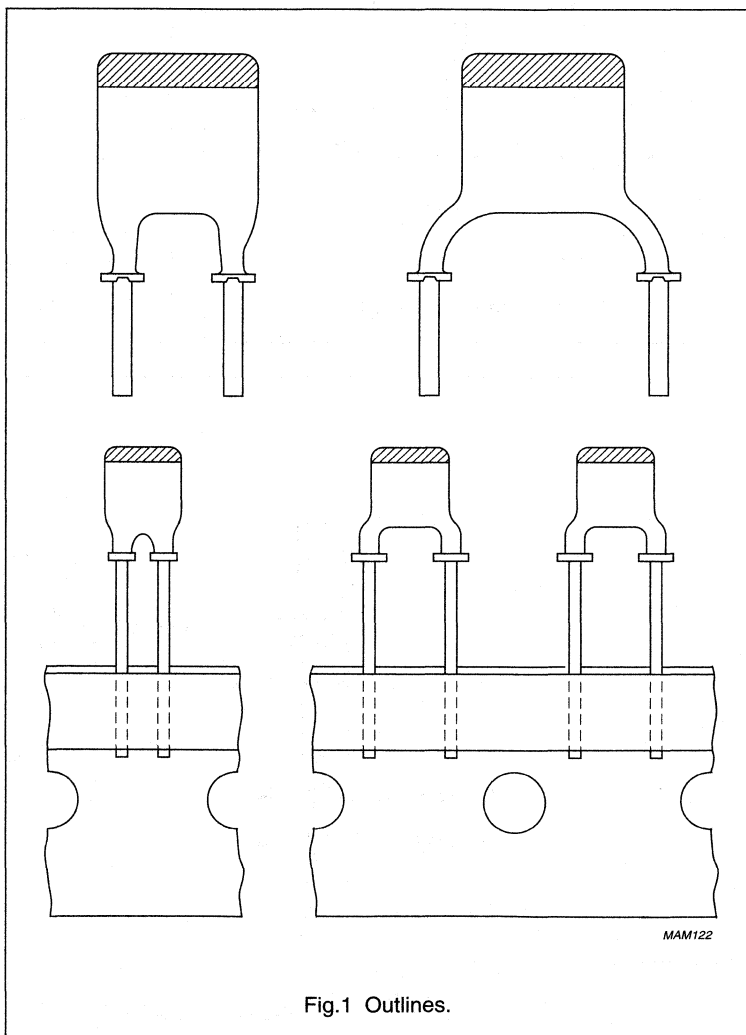


Fig.1 Outlines.

Miniature ceramic plate capacitors

Precision capacitors NPO

MECHANICAL DATA

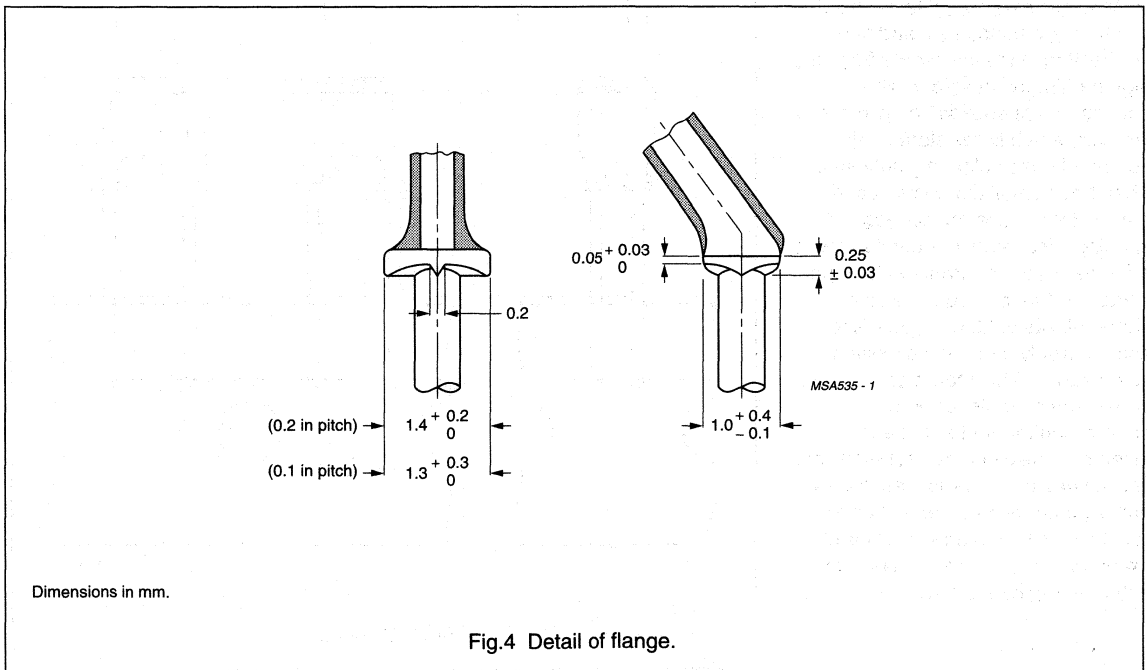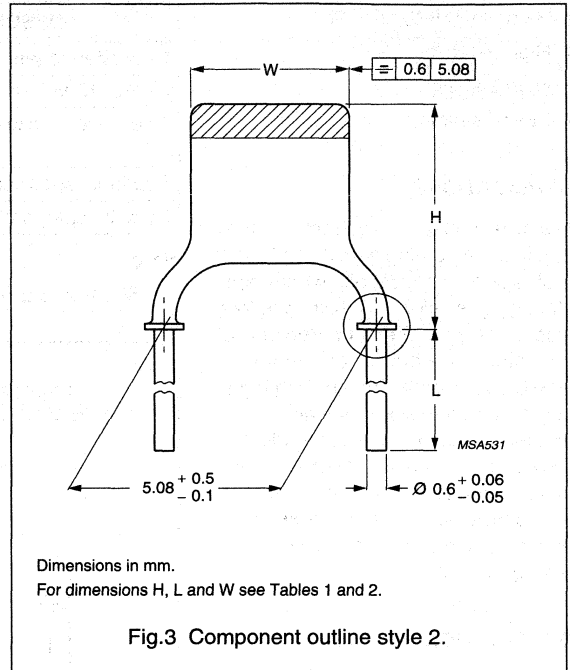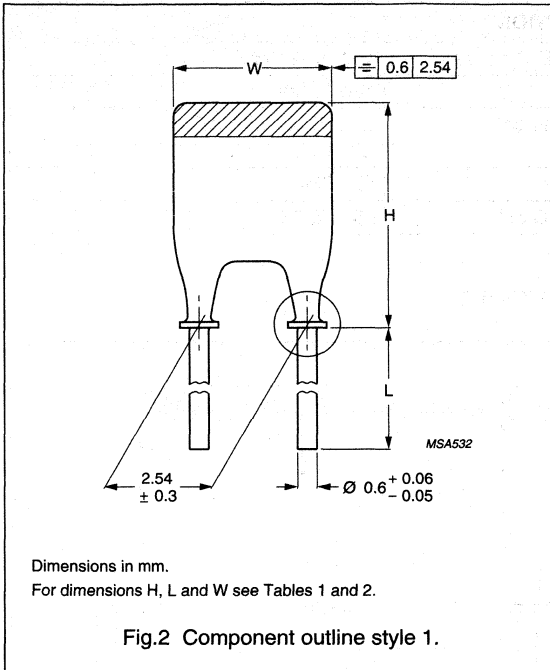

Miniature ceramic plate capacitors

Precision capacitors NP0

Marking

The temperature coefficient is indicated by a colour code in accordance with IEC and EIA recommendations. Capacitance value is indicated by a marking code in a contrasting colour on the body. Refer to Table 4, for marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

PACKAGING

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION**Table 2** Catalogue numbers

PITCH P	LEAD DIAMETER d	STYLE	CATALOGUE NUMBERS ⁽¹⁾			
			BULK PACKED		ON TAPE ⁽²⁾ (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
			L ≥ 13 mm	L = 4 ±0.5 mm		
2.54 mm (0.1 inch)	0.6 mm (0.024 inch)	1	2222 680	2222 682	2222 678	2222 688
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2	2222 681	2222 683	2222 679	2222 689

Notes

1. Catalogue numbers to be completed by adding the last 5 digits for required capacitance value, see Table 4.
2. H₀ = 18.25 mm.

Physical dimensions**Table 1** Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)		MASS (g)
		STYLE 1	STYLE 2	
I	3.6 (-1.1)	5.0 (-1.5)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	5.3 (-1.7)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	6.0 (-2.1)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	6.8 (-2.3)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	7.7 (-2.4)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	10.3 (-2.8)	11.2 (-3.1)	≈0.23

Notes

1. Unless indicated in Table 4, the thickness of the capacitors does not exceed 2.3 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Precision capacitors NP0

Table 3 Conditions for Table 4; precision capacitors with temperature coefficient NP0, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	1 to 240 pF (E24 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$0 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	black

Table 4 Precision capacitance range, temperature coefficient NP0

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE ⁽¹⁾	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
1.0	±0.1 pF	I ⁽²⁾	1p0	90108
1.1	±0.1 pF	I	1p1	90118
1.2	±0.1 pF	I	1p2	90128
1.3	±0.1 pF	I	1p3	90138
1.5	±0.1 pF	I	1p5	90158
1.6	±0.1 pF	I	1p6	90168
1.8	±0.1 pF	I	1p8	90188
2.0	±0.1 pF	I	2p0	90208
2.2	±0.1 pF	I	2p2	90228
2.4	±0.1 pF	I	2p4	90248
2.7	±0.1 pF	I	2p7	90278
3.0	±0.1 pF	I	3p0	90308
3.3	±0.1 pF	I	3p3	90338
3.6	±0.1 pF	I	3p6	90368
3.9	±0.1 pF	I	3p9	90398
4.3	±0.1 pF	I	4p3	90438
4.7	±0.1 pF	I	4p7	90478
5.1	±0.1 pF	I	5p1	90518
5.6	±0.1 pF	I	5p6	90568
6.2	±0.1 pF	I	6p2	90628
6.8	±0.1 pF	I	6p8	90688
7.5	±0.1 pF	I	7p5	90758
8.2	±0.1 pF	I	8p2	90828
10	±0.1 pF	I	10p	90109
11	±1%	I	11p	90119
12	±1%	I	12p	90129
13	±1%	I	13p	90139
15	±1%	I	15p	90159
16	±1%	I	16p	90169

Miniature ceramic plate capacitors

Precision capacitors NP0

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE ⁽¹⁾	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
18	±1%	I	18p	90189
20	±1%	I	20p	90209
22	±1%	I	22p	90229
24	±1%	I	24p	90249
27	±1%	I	27p	90279
30	±1%	I	30p	90309
33	±1%	I	33p	90339
36	±1%	IIA	36p	90369
39	±1%	IIA	39p	90399
43	±1%	IIA	43p	90439
47	±1%	IIA	47p	90479
51	±1%	IIA	51p	90519
56	±1%	IIA	56p	90569
62	±1%	IIB	62p	90629
68	±1%	IIB	68p	90689
75	±1%	IIB	75p	90759
82	±1%	IIB	82p	90829
100	±1%	III	n10	90101
110	±1%	III	n11	90111
120	±1%	III	n12	90121
130	±1%	IV	n13	90131
150	±1%	IV	n15	90151
160	±1%	IV	n16	90161
180	±1%	IV	n18	90181
200	±1%	V	n20	90201
220	±1%	V	n22	90221
240	±1%	V	n24	90241

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Precision capacitors NP0


ELECTRICAL CHARACTERISTICS

The capacitors meet the essential requirements of "IEC 384-8". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values (note 1) measured at 1 MHz, ≤ 5 V	see Table 4
Rated DC voltage	100 V
DC test voltage; duration 1 minute	300 V
DC test voltage of coating; duration 1 minute	300 V
Insulation resistance at 100 V (DC) after 1 minute	$\geq 10000 \text{ M}\Omega$
Tan δ (note 1) measured at 1 MHz, ≤ 5 V:	
C ≤ 50 pF	$\leq 10 \left(\frac{15}{C} + 0.7 \right) \times 10^{-4}$; $< 20 \times 10^{-4}$
C > 50 pF	$\leq 10 \times 10^{-4}$
Category temperature range	-55 to +150 °C
Climatic category (IEC 68)	55/150/56



Note

- Including 2 mm per connecting lead.

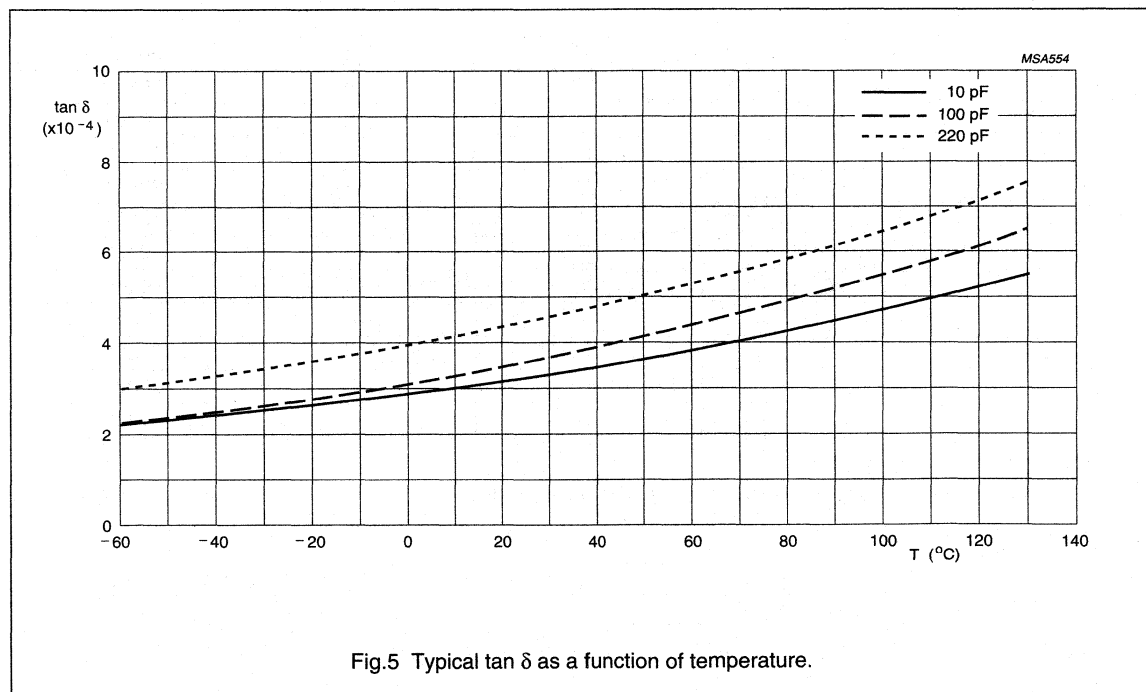



Miniature ceramic plate capacitors

Precision capacitors NP0

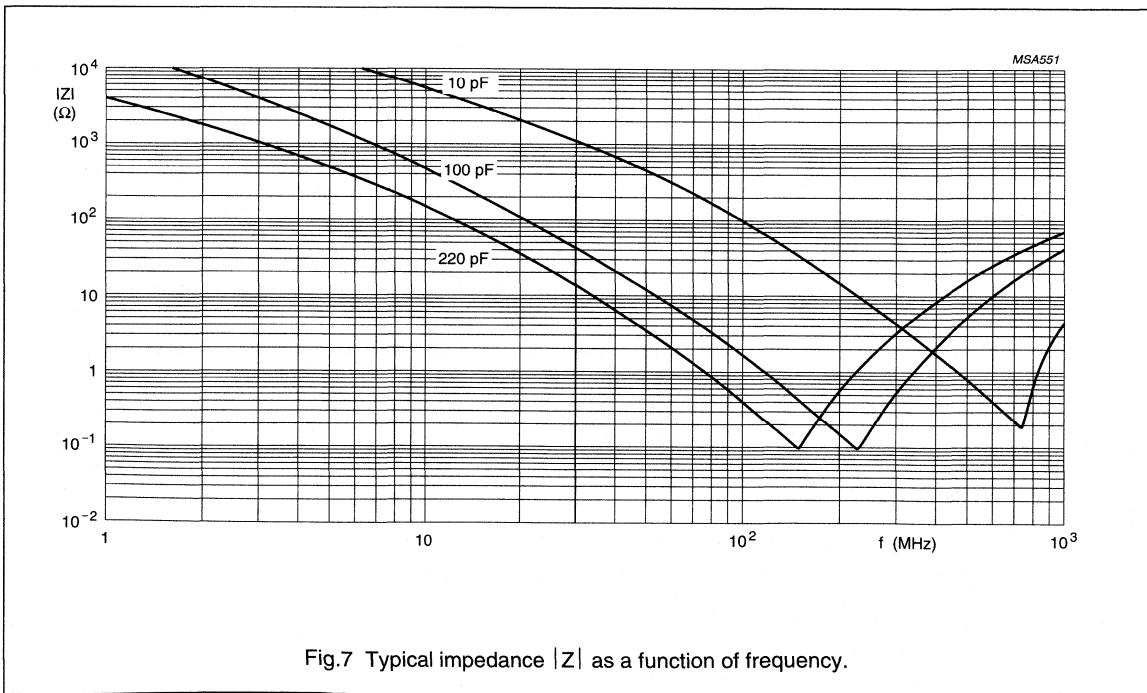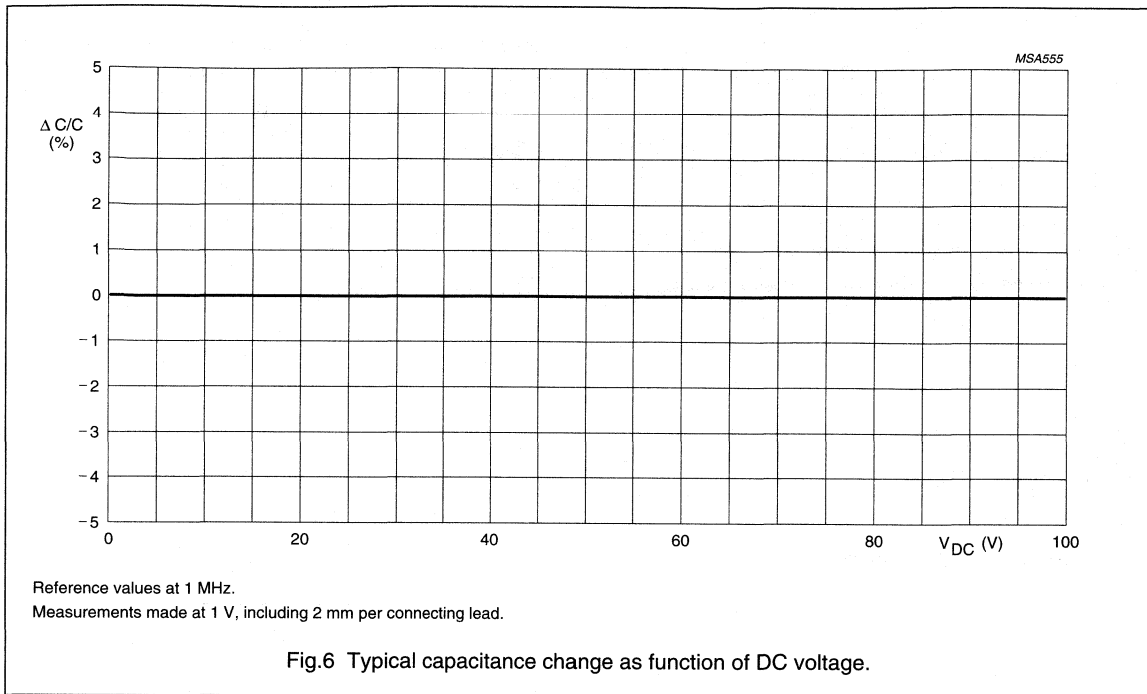

Miniature ceramic plate capacitors

Precision capacitors NP0

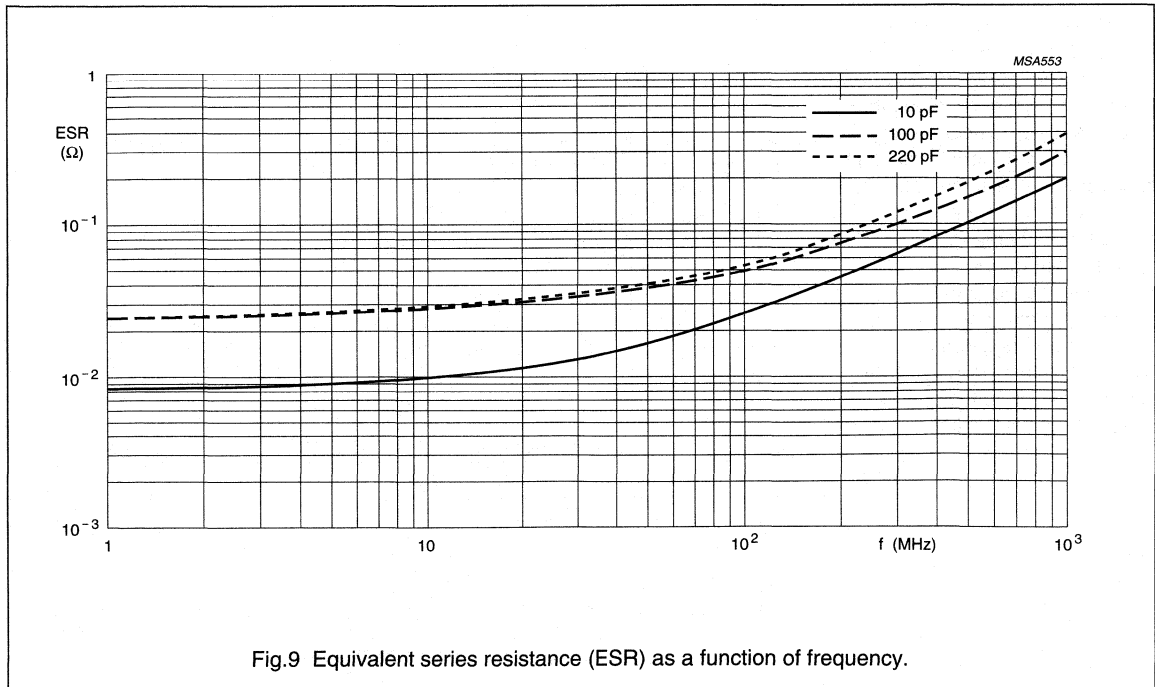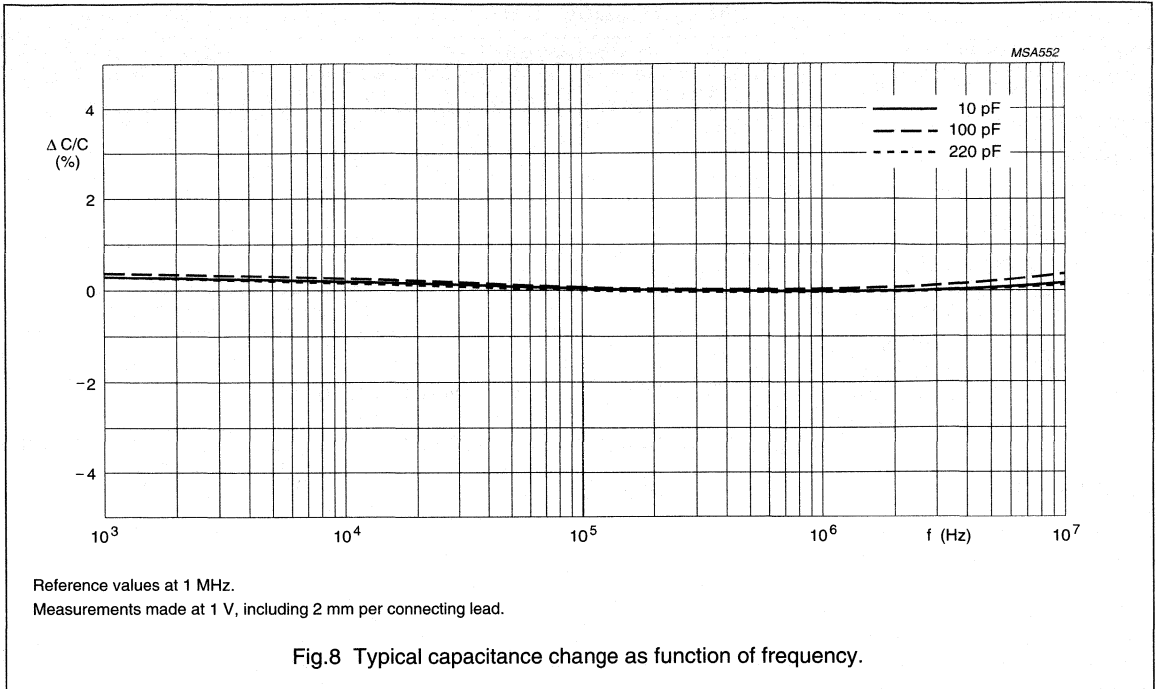

Miniature ceramic plate capacitors

Class 1, 100 V (DC) (flanged types)

FEATURES

- High-frequency circuits
- Temperature compensating
- High stability
- Space saving.

APPLICATIONS

In a great variety of electronic circuits, e.g. in filters and tuning circuits where high stability and/or temperature compensation are a requirement. Because of their small size the capacitors are suitable for use in circuitry with high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized, and tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange, which guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion. The electrical properties are characterized by low losses, a narrow tolerance on capacitance (± 0.25 pF or 2%), high stability and, owing to the absence of silver, an extremely good DC behaviour.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range (E12 series)	0.56 to 560 pF
Rated DC voltage	100 V
Tolerance on capacitance	$\pm 2\%$ or ± 0.25 pF
Temperature coefficients	P100, NP0, N150, N750 and N1500; note 1
Sectional specification	IEC 384-8
Climatic category (IEC 68)	55/085/21 (N150, N750); 55/125/56 (P100, NP0, N1500)

Note

1. N075, N220, N330, N470 available on request.




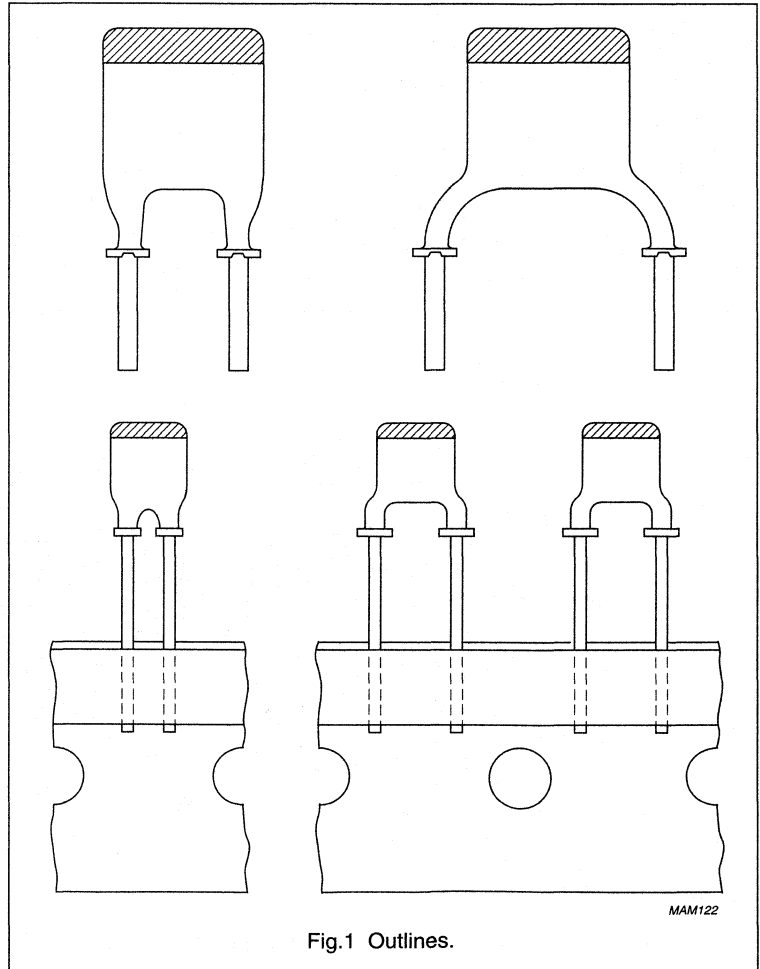


Fig.1 Outlines.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)

MECHANICAL DATA

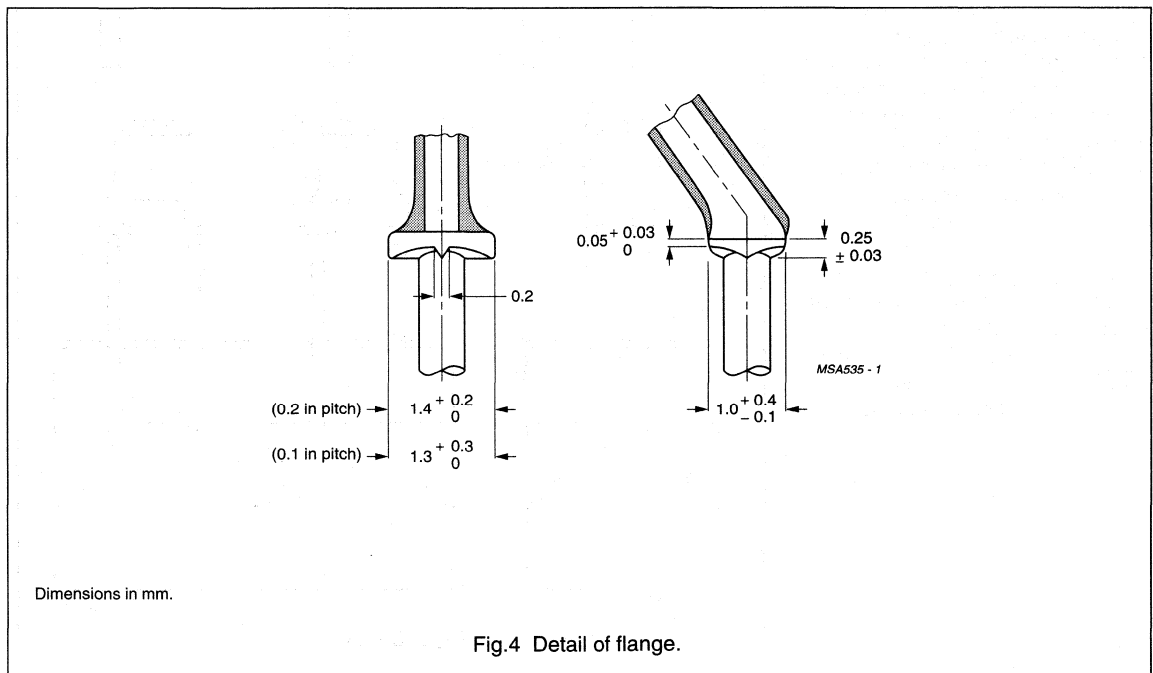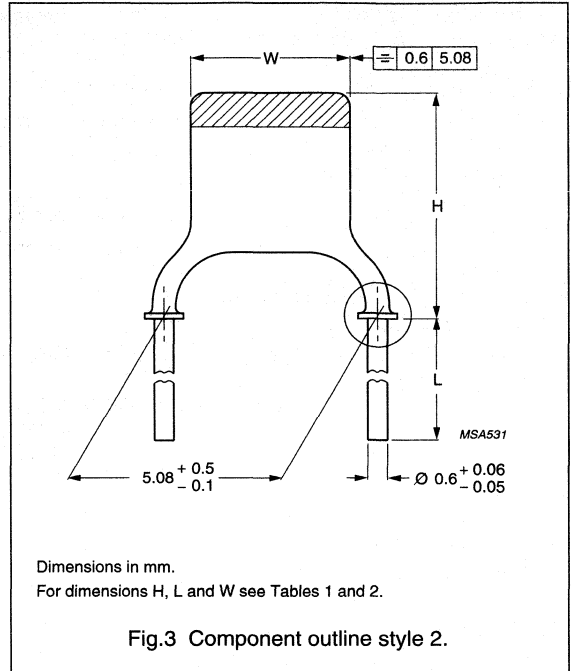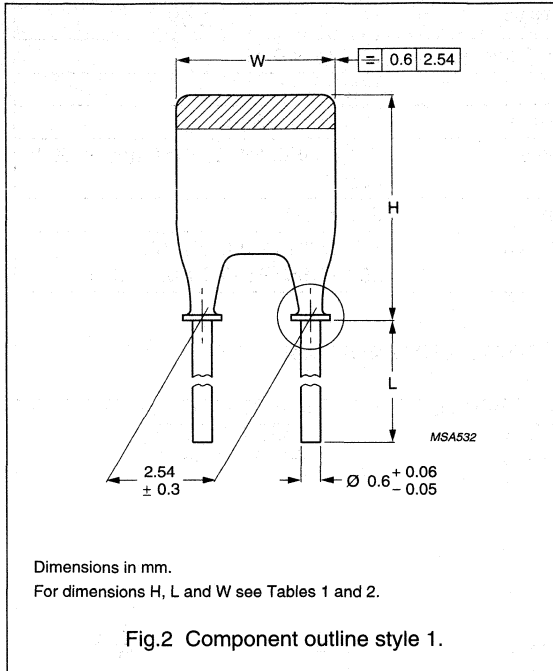

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Marking**

The temperature coefficient is indicated by a colour code in accordance with IEC and EIA recommendations. Capacitance value is indicated by a marking code in a contrasting colour on the body. Refer to Tables 3 to 12, for colour and marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

PACKAGING

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION**Table 2** Catalogue numbers

PITCH P	LEAD DIAMETER d	STYLE	CATALOGUE NUMBERS ⁽¹⁾			
			BULK PACKED		ON TAPE ⁽²⁾ (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
			L ≥ 13 mm	L = 4 ±0.5 mm		
2.54 mm (0.1 inch)	0.6 mm (0.024 inch)	1	2222 680	2222 682	2222 678	2222 688
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2	2222 681	2222 683	2222 679	2222 689

Notes

- Catalogue numbers to be completed by adding the last 5-digit suffix for required capacitance value, see Tables 4 to 12.
- H₀ = 18.25 mm.

Physical dimensions**Table 1** Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)		MASS (g)
		STYLE 1	STYLE 2	
I	3.6 (-1.1)	5.0 (-1.5)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	5.3 (-1.7)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	6.0 (-2.1)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	6.8 (-2.3)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	7.7 (-2.4)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	10.3 (-2.8)	11.2 (-3.1)	≈0.23

Notes

- Unless indicated in Tables 4 to 12, the thickness of the capacitors does not exceed 2.3 mm.
- Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Table 3** Conditions for Table 4; capacitors with temperature coefficient **P100 (M7G)**, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	0.56 to 47 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$100 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	red/violet
Climatic category (IEC 68)	55/125/56

Table 4 Preferred capacitance range, temperature coefficient **P100 (M7G)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
0.56	±0.25 pF	I ⁽²⁾	p56	03567
0.68	±0.25 pF	I ⁽²⁾	p68	03687
0.82	±0.25 pF	I ⁽²⁾	p82	03827
1.0	±0.25 pF	I ⁽³⁾	1p0	03108
1.2	±0.25 pF	I	1p2	03128
1.5	±0.25 pF	I	1p5	03158
1.8	±0.25 pF	I	1p8	03188
2.2	±0.25 pF	I	2p2	03228
2.7	±0.25 pF	I	2p7	03278
3.3	±0.25 pF	I	3p3	03338
3.9	±0.25 pF	I	3p9	03398
4.7	±0.25 pF	I	4p7	03478
5.6	±0.25 pF	I	5p6	03568
6.8	±0.25 pF	I	6p8	03688
8.2	±0.25 pF	IIA	8p2	03828
10	±2%	IIA	10p	04109
12	±2%	IIB	12p	04129
15	±2%	IIB	15p	04159
18	±2%	III	18p	04189
22	±2%	III	22p	04229
27	±2%	IV	27p	04279
33	±2%	IV	33p	04339
39	±2%	V	39p	04399
47	±2%	V	47p	04479

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.7 mm.
3. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Table 5** Conditions for Table 6; capacitors with temperature coefficient **NP0 (C0G)**, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	1.8 to 220 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C \Delta T}\right)$	$0 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	black
Climatic category (IEC 68)	55/125/56

Table 6 Preferred capacitance range, temperature coefficient **NP0 (C0G)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
1.8	±0.25 pF	I ⁽²⁾	1p8	09188
2.2	±0.25 pF	I	2p2	09228
2.7	±0.25 pF	I	2p7	09278
3.3	±0.25 pF	I	3p3	09338
3.9	±0.25 pF	I	3p9	09398
4.7	±0.25 pF	I	4p7	09478
5.6	±0.25 pF	I	5p6	09568
6.8	±0.25 pF	I	6p8	09688
8.2	±0.25 pF	I	8p2	09828
10	±2%	I	10p	10109
12	±2%	I	12p	10129
15	±2%	I	15p	10159
18	±2%	I	18p	10189
22	±2%	I	22p	10229
27	±2%	I	27p	10279
33	±2%	I	33p	10339
39	±2%	IIA	39p	10399
47	±2%	IIA	47p	10479
56	±2%	IIA	56p	10569
68	±2%	IIB	68p	10689
82	±2%	IIB	82p	10829
100	±2%	III	n10	10101
120	±2%	III	n12	10121
150	±2%	IV	n15	10151
180	±2%	IV	n18	10181
220	±2%	V	n22	10221

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Table 7** Conditions for Table 8; capacitors with temperature coefficient **N150 (P2G)**, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	3.9 to 220 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C \Delta T}\right)$	$-150 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	orange
Climatic category (IEC 68)	55/085/21

Table 8 Preferred capacitance range, temperature coefficient **N150 (P2G)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
3.9	±0.25 pF	I ⁽²⁾	3p9	33398
4.7	±0.25 pF	I	4p7	33478
5.6	±0.25 pF	I	5p6	33568
6.8	±0.25 pF	I	6p8	33688
8.2	±0.25 pF	I	8p2	33828
10	±2%	I	10p	34109
12	±2%	I	12p	34129
15	±2%	I	15p	34159
18	±2%	I	18p	34189
22	±2%	I	22p	34229
27	±2%	I	27p	34279
33	±2%	I	33p	34339
39	±2%	IIA	39p	34399
47	±2%	IIA	47p	34479
56	±2%	IIB	56p	34569
68	±2%	IIB	68p	34689
82	±2%	III	82p	34829
100	±2%	III	n10	34101
120	±2%	IV	n12	34121
150	±2%	IV	n15	34151
180	±2%	IV	n18	34181
220	±2%	V	n22	34221

Notes

- Other capacitance values and tolerances are available on request.
- Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Table 9** Conditions for Table 10; capacitors with temperature coefficient **N750 (U2J)**, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	3.9 to 330 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$-750 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 120 \times 10^{-6}/K$
Marking colour of the temperature coefficient	violet
Climatic category (IEC 68)	55/085/21

Table 10 Preferred capacitance range, temperature coefficient **N750 (U2J)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
3.9	±0.25 pF	I ⁽²⁾	3p9	57398
4.7	±0.25 pF	I	4p7	57478
5.6	±0.25 pF	I	5p6	57568
6.8	±0.25 pF	I	6p8	57688
8.2	±0.25 pF	I	8p2	57828
10	±2%	I	10p	58109
12	±2%	I	12p	58129
15	±2%	I	15p	58159
18	±2%	I	18p	58189
22	±2%	I	22p	58229
27	±2%	I	27p	58279
33	±2%	I	33p	58339
39	±2%	I	39p	58399
47	±2%	I	47p	58479
56	±2%	IIA	56p	58569
68	±2%	IIA	68p	58689
82	±2%	IIB	82p	58829
100	±2%	IIB	n10	58101
120	±2%	III	n12	58121
150	±2%	III	n15	58151
180	±2%	IV	n18	58181
220	±2%	IV	n22	58221
270	±2%	V	n27	58271
330	±2%	V	n33	58331

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Class 1, 100 V (DC)
(flanged types)**Table 11** Conditions for Table 12; capacitors with temperature coefficient **N1500 (P3K)**, rated voltage 100 V (DC)

DESCRIPTION	VALUE
Capacitance range	18 to 560 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$-1\,500 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$(0 \text{ to } +500) \times 10^{-6}/K$
Marking colour of the temperature coefficient	orange/orange
Climatic category (IEC 68)	55/125/56

Table 12 Preferred capacitance range, temperature coefficient **N1500 (P3K)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
18	±2%	I ⁽²⁾	18p	70189
22	±2%	I	22p	70229
27	±2%	I	27p	70279
33	±2%	I	33p	70339
39	±2%	I	39p	70399
47	±2%	I	47p	70479
56	±2%	I	56p	70569
68	±2%	I	68p	70689
82	±2%	I	82p	70829
100	±2%	IIA	n10	70101
120	±2%	IIA	n12	70121
150	±2%	IIB	n15	70151
180	±2%	IIB	n18	70181
220	±2%	III	n22	70221
270	±2%	III	n27	70271
330	±2%	IV	n33	70331
390	±2%	IV	n39	70391
470	±2%	V	n47	70471
560	±2%	V	n56	70561

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors


Class 1, 100 V (DC)
(flanged types)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "IEC 384-8". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values (note 1) measured at 1 MHz, ≤ 5 V	see Tables 4 to 12
Rated DC voltage	100 V
DC test voltage; duration 1 minute	300 V
DC test voltage of coating; duration 1 minute	300 V
Insulation resistance at 100 V (DC) after 1 minute	≥ 10000 M Ω
Tan δ (note 1) measured at 1 MHz, ≤ 5 V:	
C ≤ 50 pF	$\leq 15 \left(\frac{15}{C} + 0.7 \right) \times 10^{-4}$; $< 55 \times 10^{-4}$
C > 50 pF	$\leq 15 \times 10^{-4}$
Category temperature range	-55 to +85 °C (N150, N750); -55 to +125 °C (P100, NP0, N1500)
Storage temperature range	-55 to +85 °C

Note

- Including 2 mm per connecting lead.

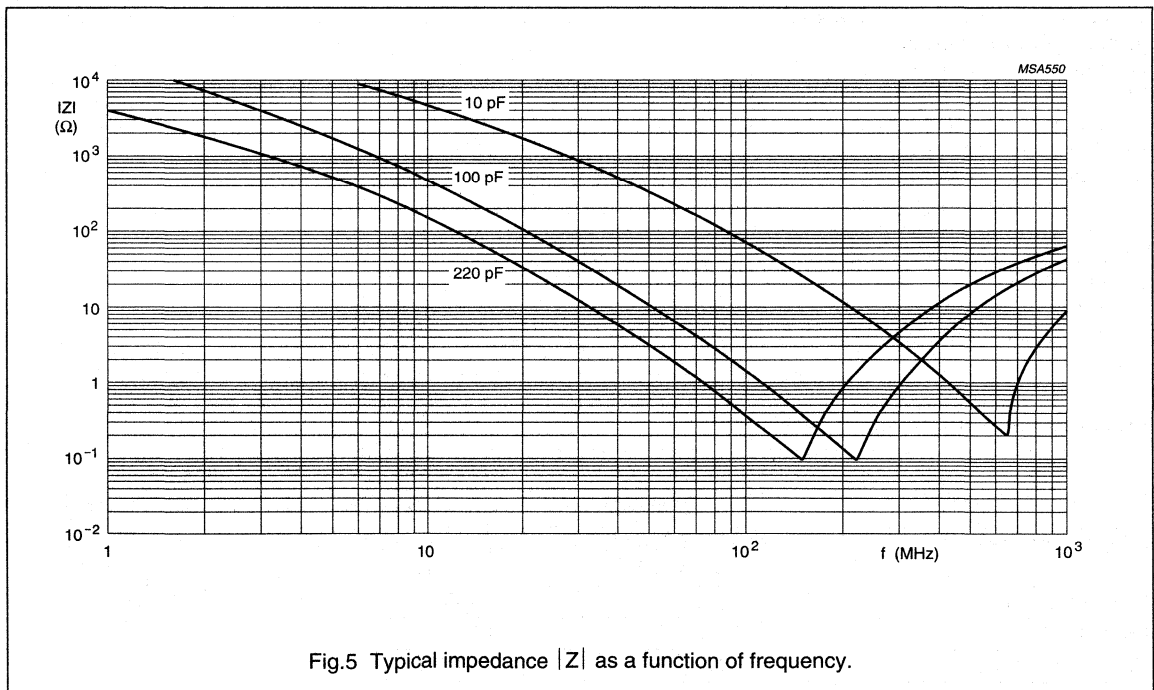

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC) (flanged types)

FEATURES

- General purpose
- Coupling and decoupling
- Space saving.

APPLICATIONS

In electronic circuits where non-linear change of capacitance with temperature is permissible and low losses are not essential, i.e. coupling and decoupling. Because of their small size the capacitors are suitable for use in circuitry with high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized. The tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange, which guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion.

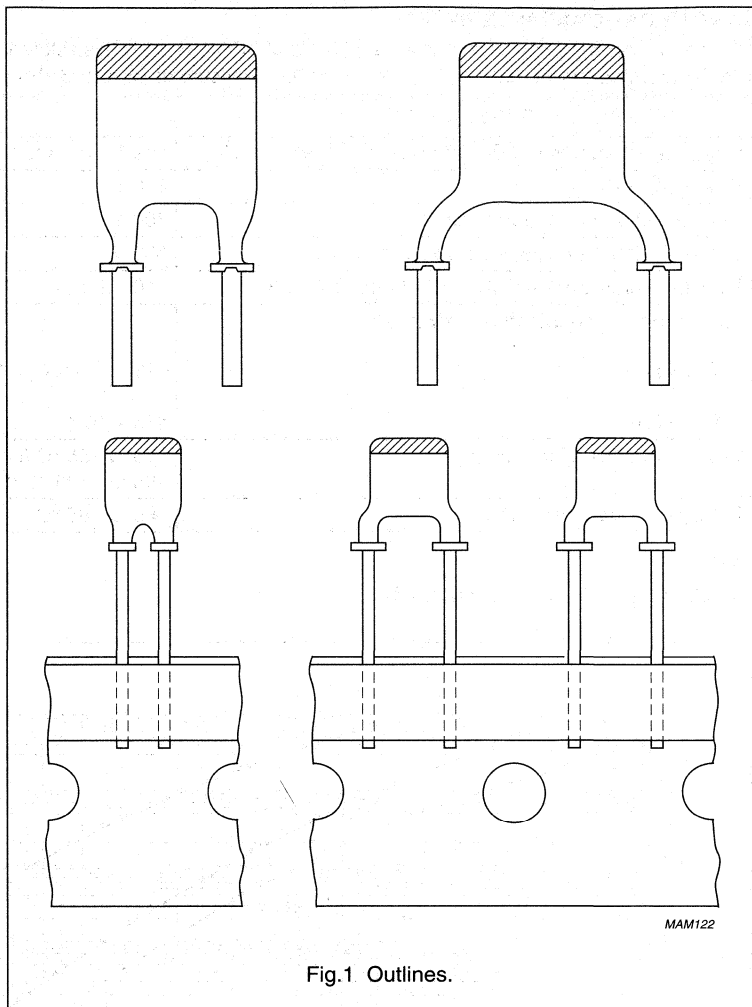


Fig.1 Outlines.




QUICK REFERENCE DATA

DESCRIPTION	VALUE		
	2222 630	2222 640	2222 629
Capacitance range	180 to 6800 pF (E12 series)	1000 to 15000 pF (E6 series)	1000 to 47000 pF (E3 series)
Dielectric material	K2000	K5000	K14000
Rated DC voltage	100 V	100 V	63 V
Tolerance on capacitance	±10%	-20/+50%	-20/+80%
Sectional specification	IEC 384-9 (2C2 and 2D1); EIA (X5S/X7T)	IEC 384-9 (2E2); EIA (X5U)	IEC 384-9 (2F6); EIA (Y5V)
Climatic category (IEC 68)	55/125/56	55/105/21	10/085/21

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

MECHANICAL DATA

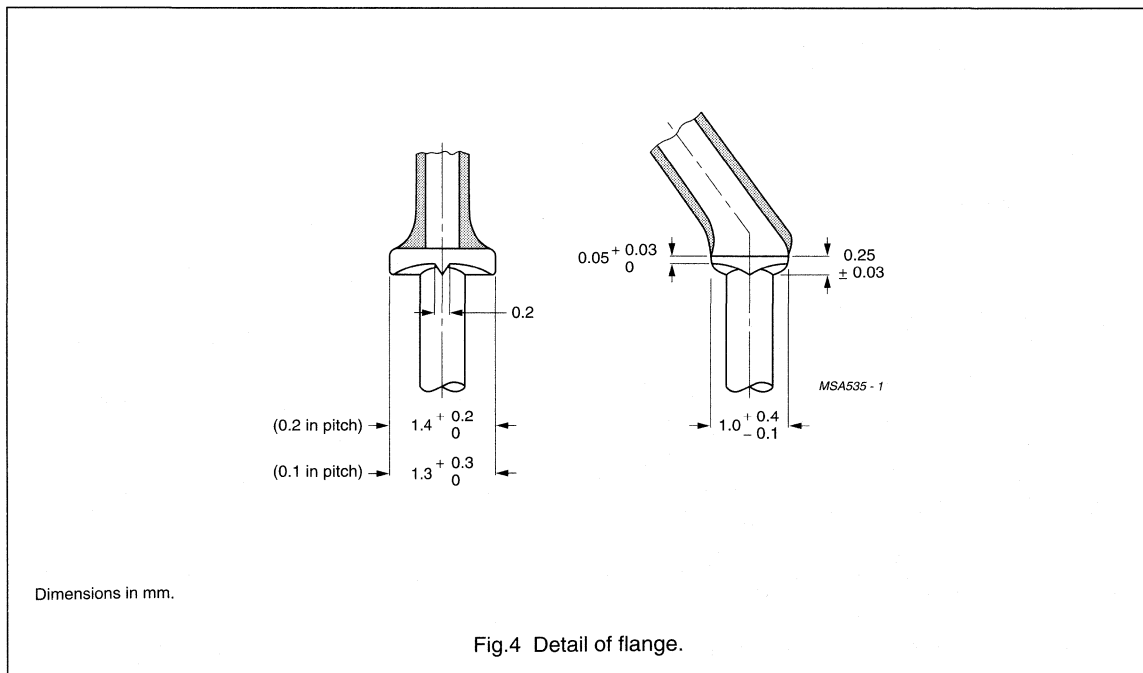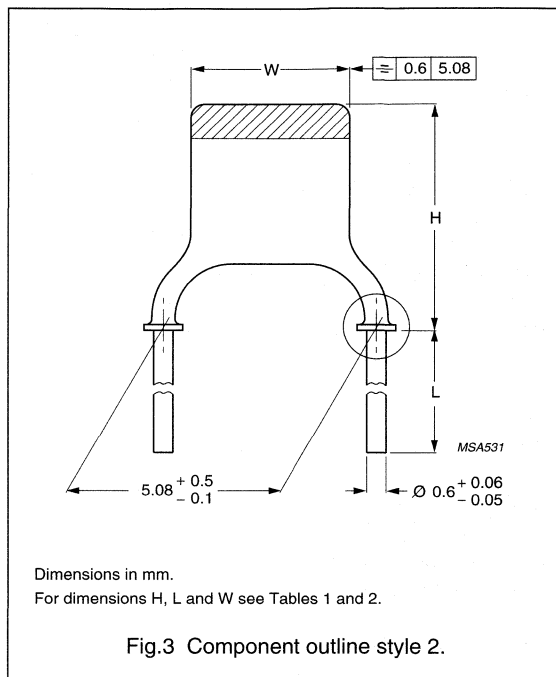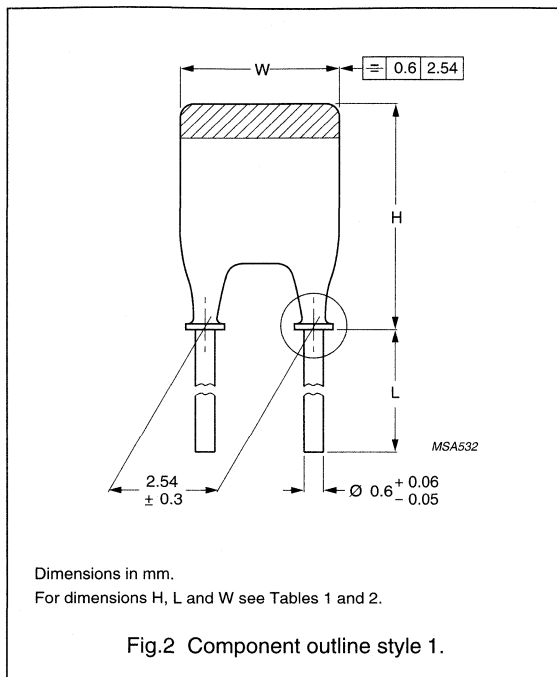

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC) (flanged types)

Marking

The body of the capacitor is tan coloured. The capacitors also have a colour mark on top indicating the temperature dependency of the capacitance:

yellow for type 2222 630

blue for type 2222 640

green for type 2222 629

The capacitance value is indicated by a marking code in a contrasting colour on the body. Refer to Tables 3, 4 and 5 for marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

ORDERING INFORMATION

Table 2 Catalogue numbers

PITCH P	LEAD DIAMETER d	STYLE	CATALOGUE NUMBERS ⁽¹⁾			
			BULK PACKED		ON TAPE ⁽²⁾ (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
			L ≥ 13 mm	L = 4 ±0.5 mm		
2.54 mm (0.1 inch)	0.6 mm (0.024 inch)	1	2222 630 08...	2222 630 18...	2222 630 51...	2222 630 61...
			2222 640 08...	2222 640 18...	2222 640 51...	2222 640 61...
			2222 629 08...	2222 629 18...	2222 629 51...	2222 629 61...
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2	2222 630 09...	2222 630 19...	2222 630 53...	2222 630 63...
			2222 640 09...	2222 640 19...	2222 640 53...	2222 640 63...
			2222 629 09...	2222 629 19...	2222 629 53...	2222 629 63...

Notes

- Catalogue number to be completed by adding the 3-digit suffix for required capacitance value, see Tables 3, 4 and 5.
- H₀ = 18.25 mm.

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)		MASS (g)
		STYLE 1	STYLE 2	
I	3.6 (-1.1)	5.0 (-1.5)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	5.3 (-1.7)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	6.0 (-2.1)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	6.8 (-2.3)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	7.7 (-2.4)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	10.3 (-2.8)	11.2 (-3.1)	≈0.23

Notes

- Unless indicated in Tables 3, 4 and 5, the thickness of the capacitors does not exceed 2.3 mm.
- Tolerances are given between parentheses.

PACKAGING

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)**Table 3 Preferred capacitance range for 2222 630**

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
180	j ⁽¹⁾	n18	181
220	j ⁽¹⁾	n22	221
270	I	n27	271
330	I	n33	331
390	I	n39	391
470	I	n47	471
560	I	n56	561
680	I	n68	681
820	I	n82	821
1000	I	1n0	102
1200	IIA	1n2	122
1500	IIA	1n5	152
1800	IIB	1n8	182
2200	IIB	2n2	222
2700	III	2n7	272
3300	III	3n3	332
3900	IV	3n9	392
4700	IV	4n7	472
5600	V	5n6	562
6800	V	6n8	682

Note

1. Maximum thickness 2.5 mm.

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)**Table 4 Preferred capacitance range for 2222 640**

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
1 000	I	1n0	102
1 500	I	1n5	152
2 200	I	2n2	222
3 300	IIA	3n3	332
4 700	IIB	4n7	472
6 800	III	6n8	682
10 000	IV	10n	103
15 000	V	15n	153

Table 5 Preferred capacitance range for 2222 629

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING	SUFFIX OF CATALOGUE NUMBER (see Table 2)
1 000	I	1n0	102
2 200	I	2n2	222
4 700	I	4n7	472
10 000	IIB	10n	103
22 000	IV	22n	223
47 000	V	47n	473

Miniature ceramic plate capacitors



Class 2, 63 V and 100 V (DC)
(flanged types)**ELECTRICAL CHARACTERISTICS****Capacitors 2222 630 (colour mark yellow)**

The capacitors meet the essential requirements of "IEC 384-8" (2C2 and 2D1) "EIA" (X5S and X7T). Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	180 to 6800 pF; E12 series (see Table 3)
Dielectric material	K2000
Tolerance on capacitance, after 1000 hours	$\pm 10\%$
Maximum capacitance change with respect to capacitance value at 20 °C	+20 to -20% (see Fig.5) from -55 to +85 °C; +20 to -30% from -55 to +125 °C
Rated DC voltage	100 V
DC test voltage; duration 1 minute	300 V
DC test voltage of coating; duration 1 minute	300 V
Insulation resistance at 100 V (DC) after 1 minute	$\geq 4\,000\text{ M}\Omega$
Tan δ measured at 1 kHz, 1 V	$\leq 3.5\%$
Maximum voltage dependency of the capacitance between 0 and 40 V	-5%
Category temperature range	-55 to +85 °C (2C2) and -55 to +125 °C (2D1)
Storage temperature range	-55 to +85 °C
Ageing	typical 1.5% per time decade
Climatic category (IEC 68)	55/125/56



Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

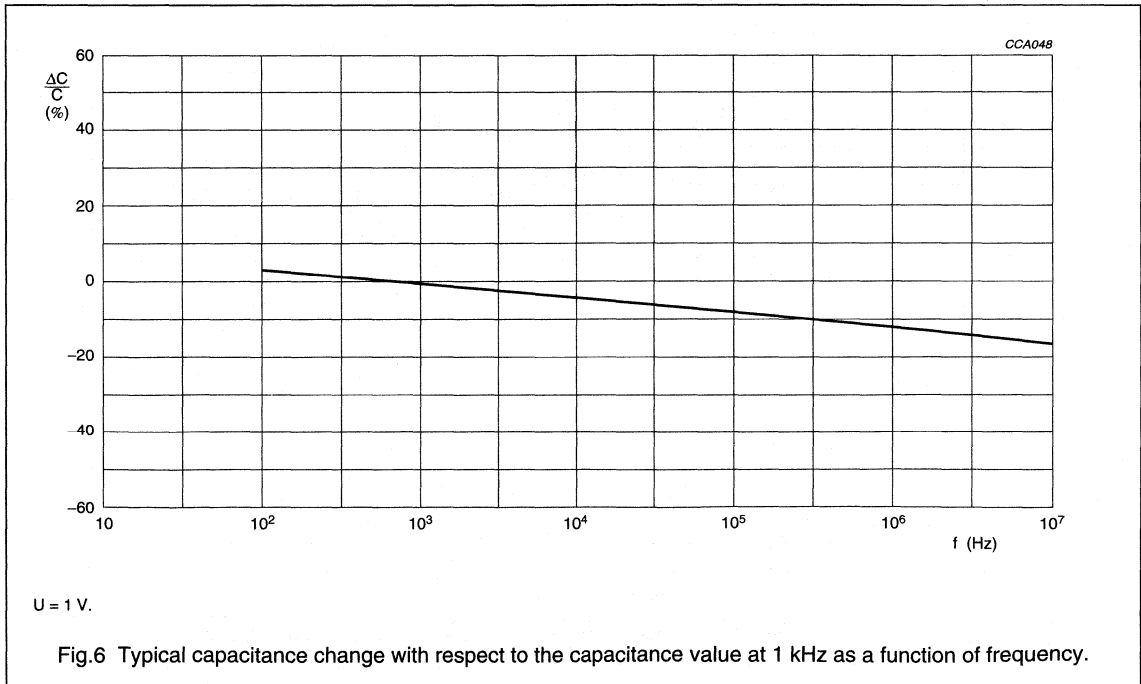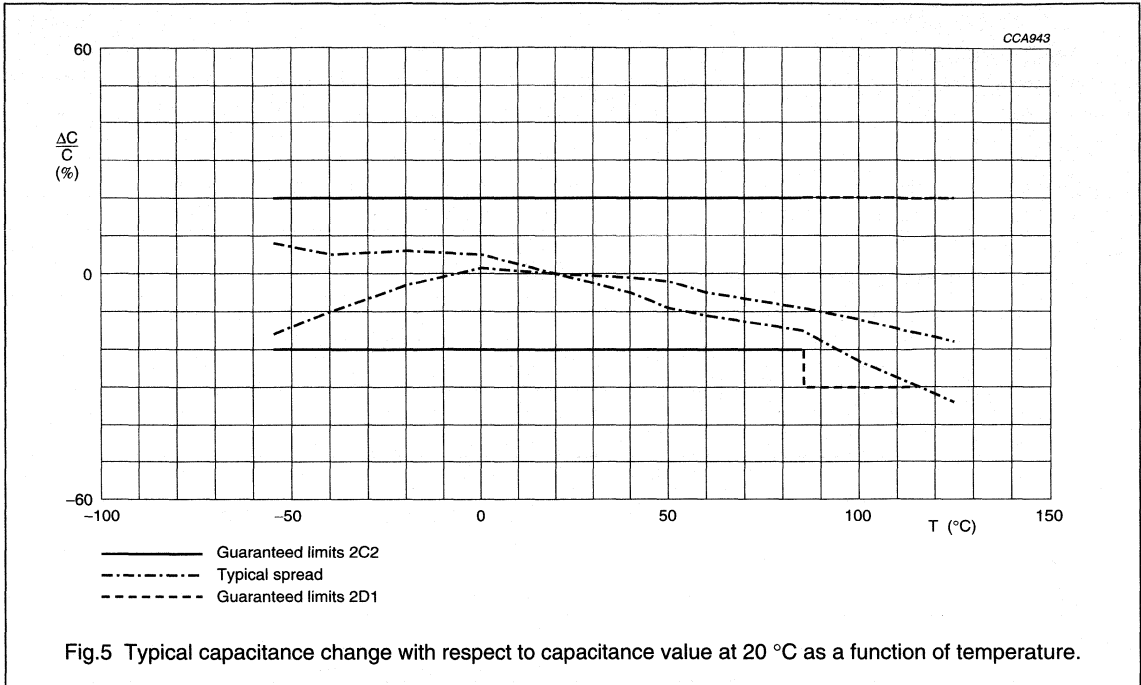



Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

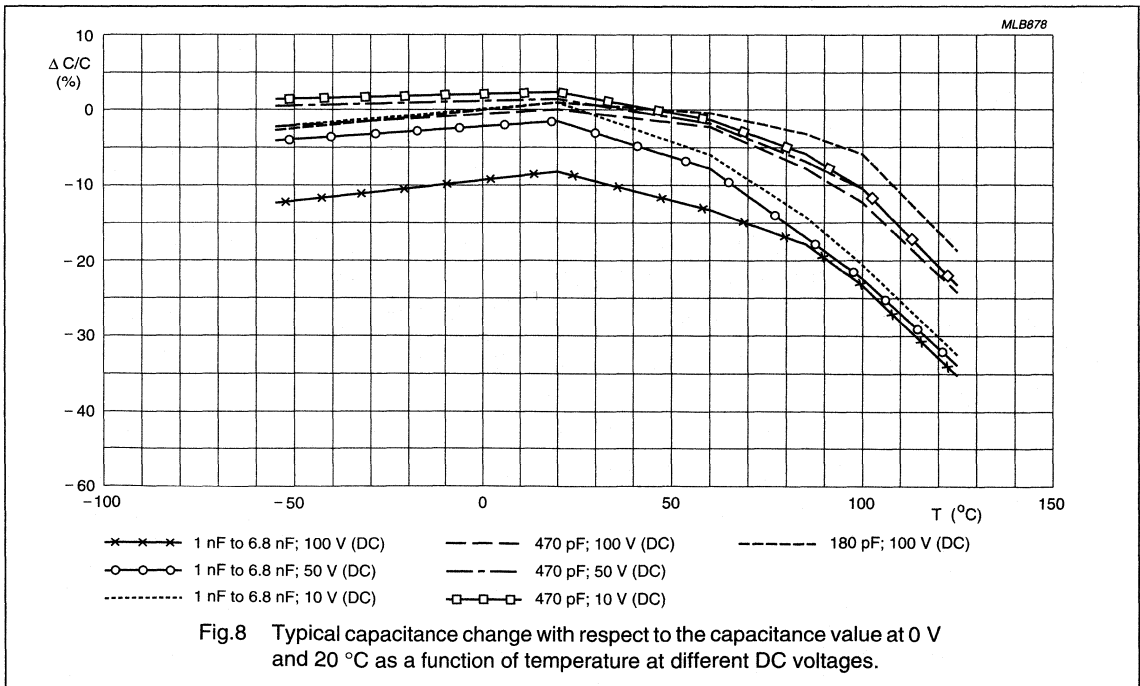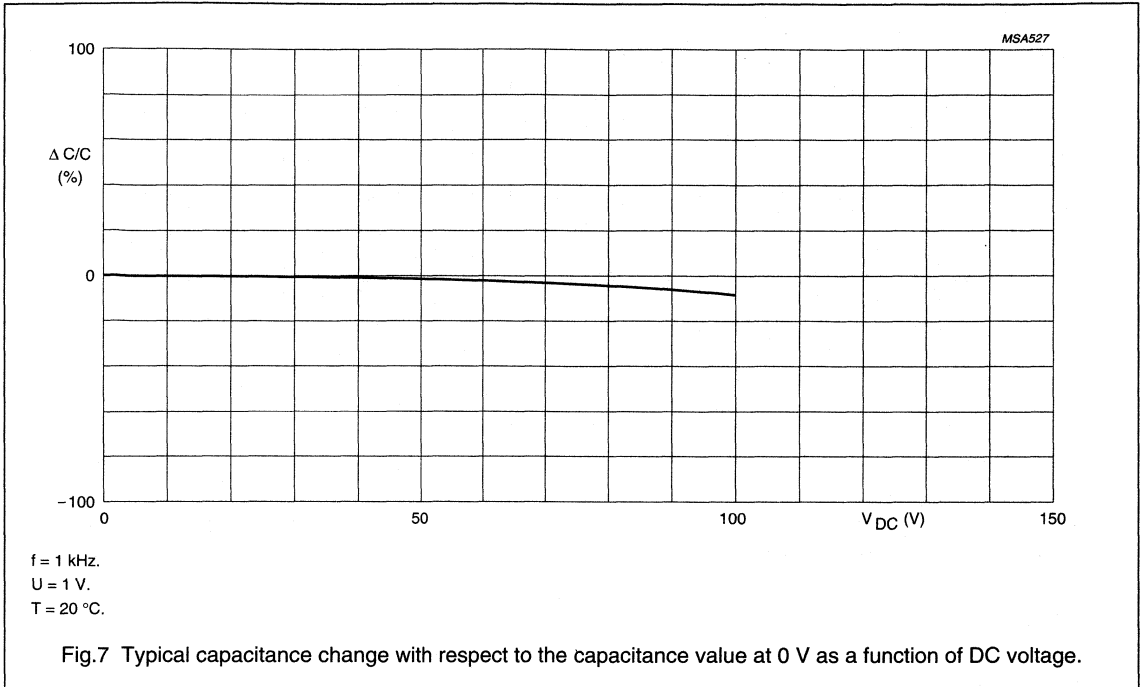

Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC) (flanged types)

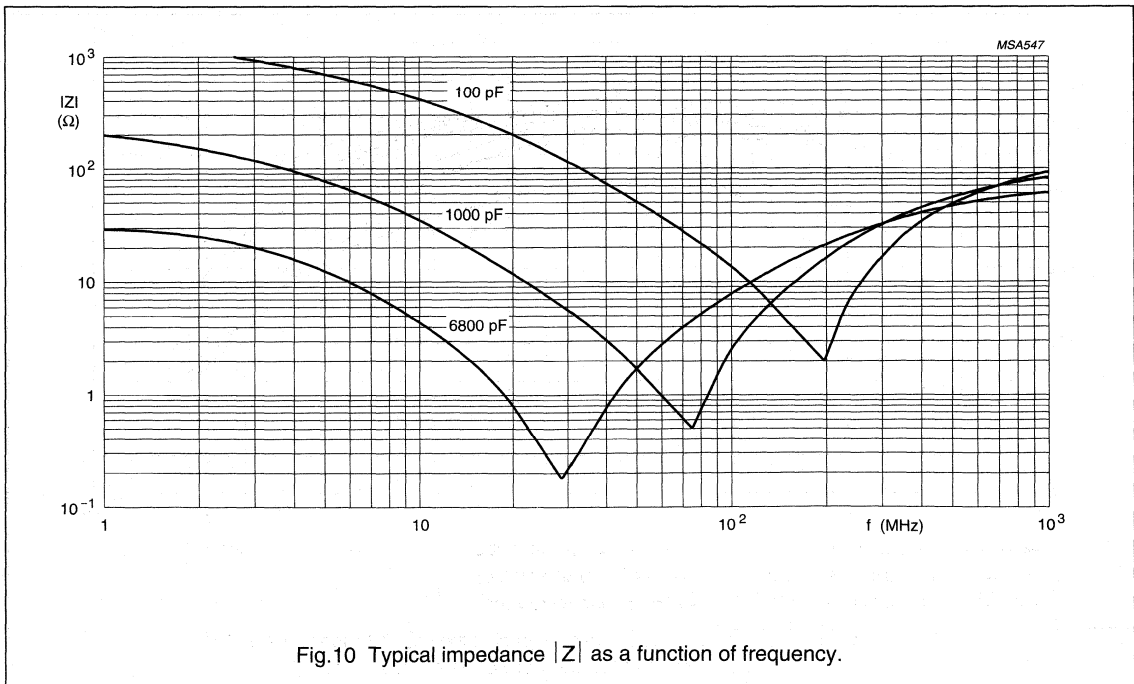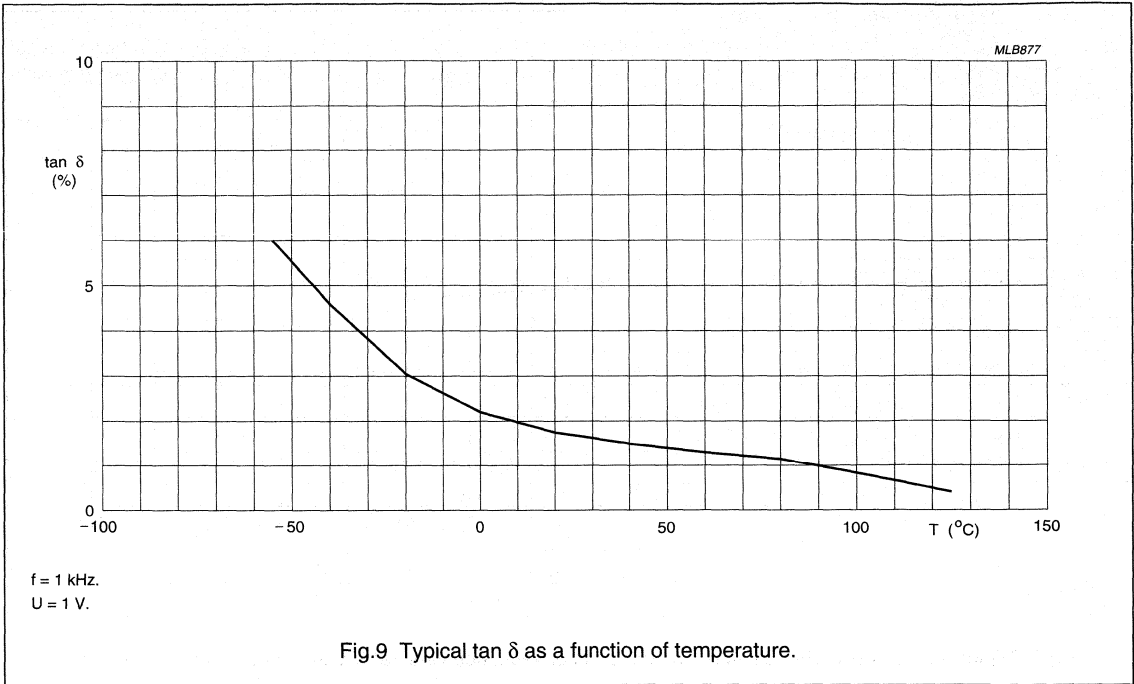


Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)**Capacitors 2222 640 (colour mark blue)**



The capacitors meet the essential requirements of "IEC 384-9" (2E2), "EIA" (X5U). Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	1000 to 15000 pF; E6 series (see Table 4)
Tolerance on capacitance, after 1000 hours	-20 to +50%
Dielectric material	K5000
Maximum capacitance change with respect to capacitance value at 20 °C	+20 to -55% (see Fig.11)
Rated DC voltage	100 V
DC test voltage; duration 1 minute	300 V
DC test voltage of coating; duration 1 minute	300 V
Insulation resistance at 100 V (DC) after 1 minute	$\geq 4000 \text{ M}\Omega$
Tan δ measured at 1 kHz, 1 V	$\leq 3.5\%$
Category temperature range	-55 to +105 °C
Storage temperature range	-55 to +85 °C
Ageing	typical 5% per time decade
Climatic category (IEC 68)	55/105/21

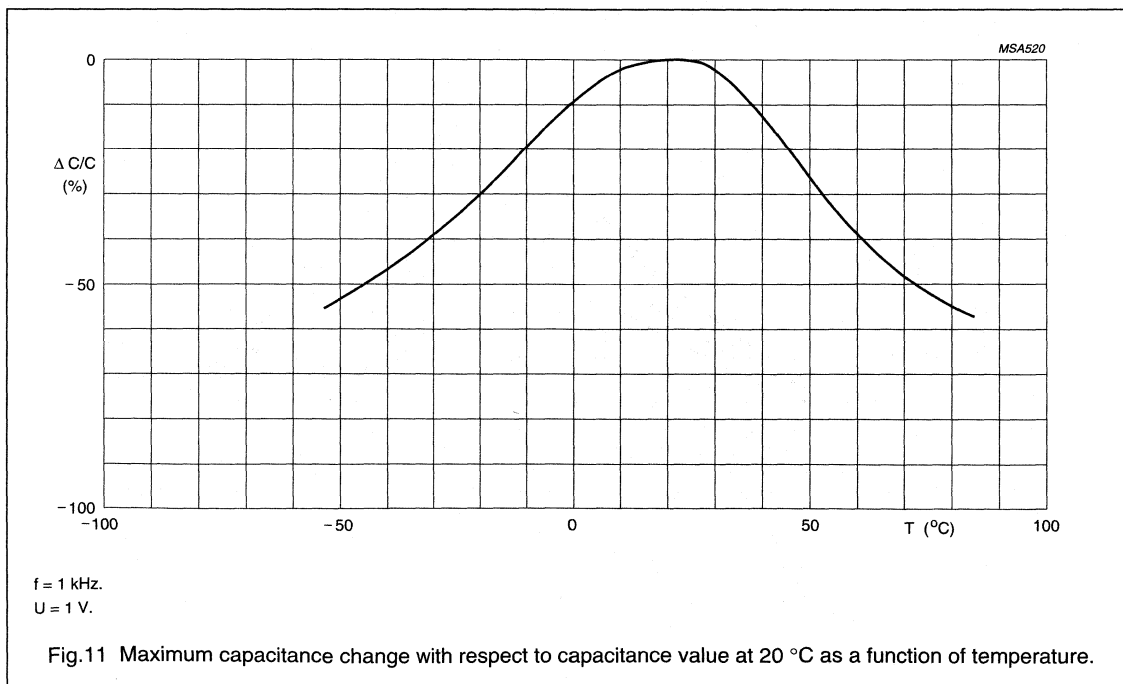


Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

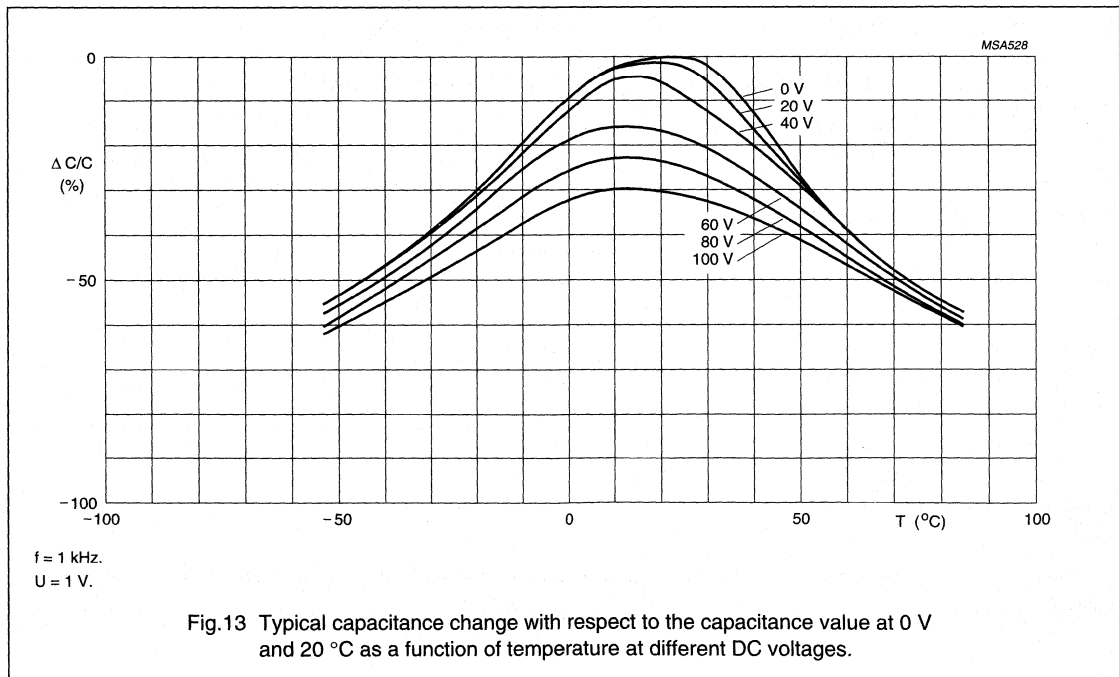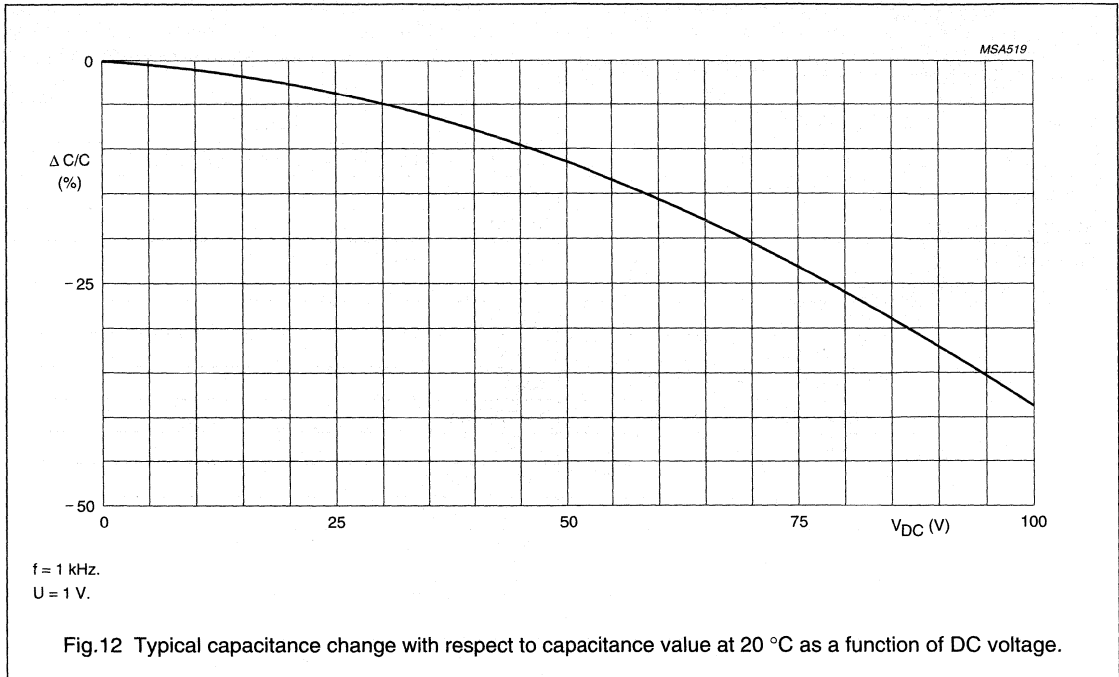

Miniature ceramic plate capacitors


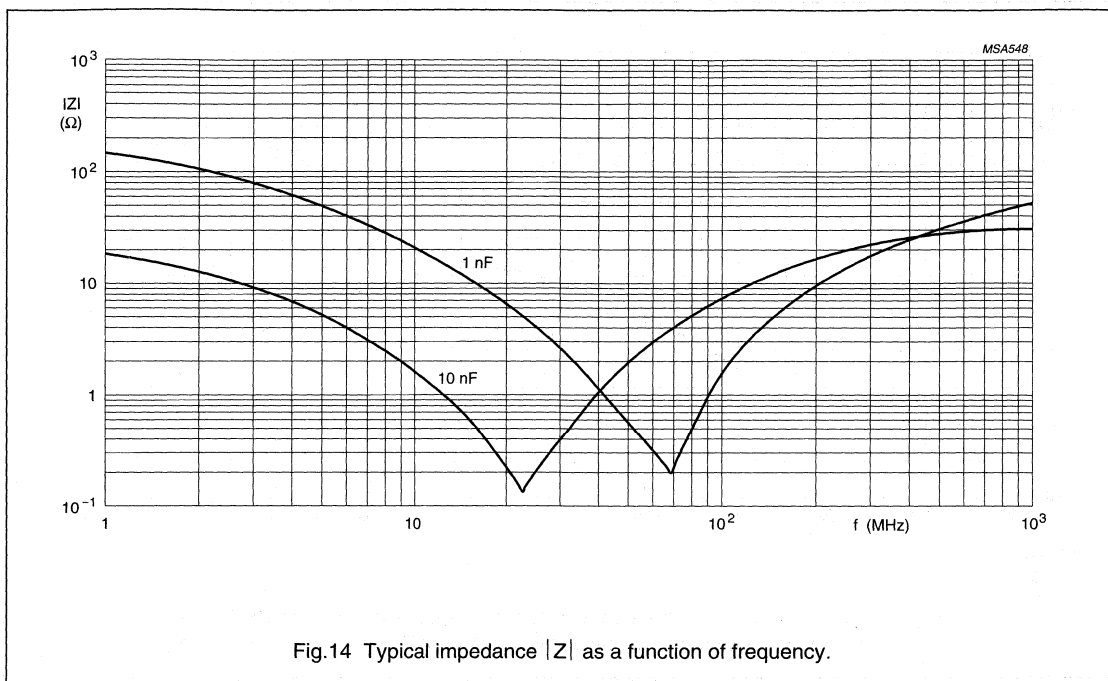
Class 2, 63 V and 100 V (DC)
(flanged types)**Capacitors 2222 629 (colour mark green)**

The capacitors meet the essential requirements of "IEC 384-9" (2F6), "EIA" (Y5U). Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	1000 to 47000 pF; E3 series (see Table 5)
Tolerance on capacitance, after 1000 hours	-20 to +80%
Dielectric material	K14000
Maximum capacitance change with respect to capacitance value at 20 °C	+20 to -85% (see Figs 15 and 16)
Rated DC voltage at 85 °C	63 V
DC test voltage; duration 1 minute	200 V
DC test voltage of coating; duration 1 minute	200 V
Insulation resistance at 100 V (DC) after 1 minute	≥ 4000 M Ω
Tan δ measured at 1 kHz, 1 V	$\leq 3.5\%$
Category temperature range	-10 to +85 °C
Storage temperature range	-55 to +85 °C
Ageing	typical 5% per time decade
Climatic category (IEC 68)	10/085/21



Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

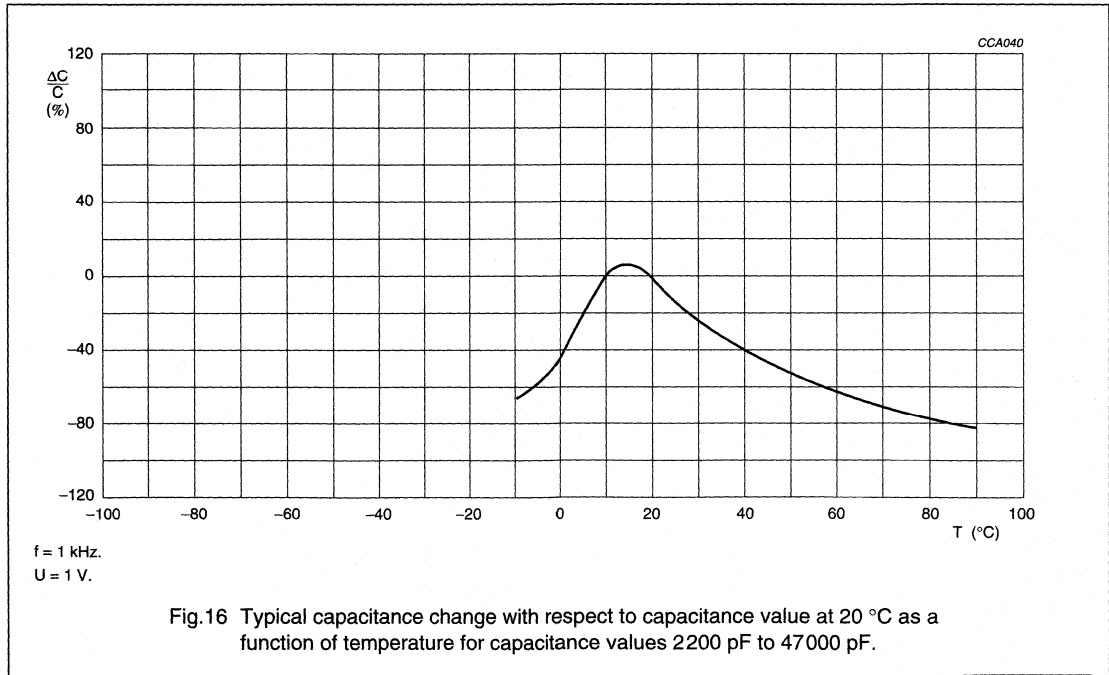
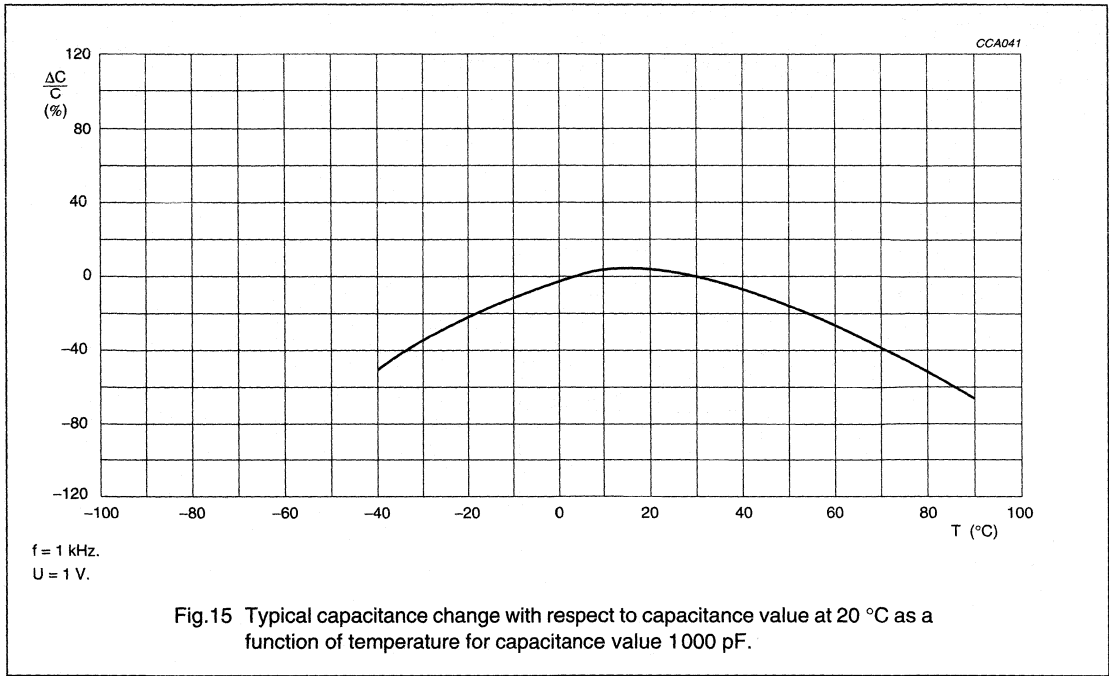


Miniature ceramic plate capacitors

Class 2, 63 V and 100 V (DC)
(flanged types)

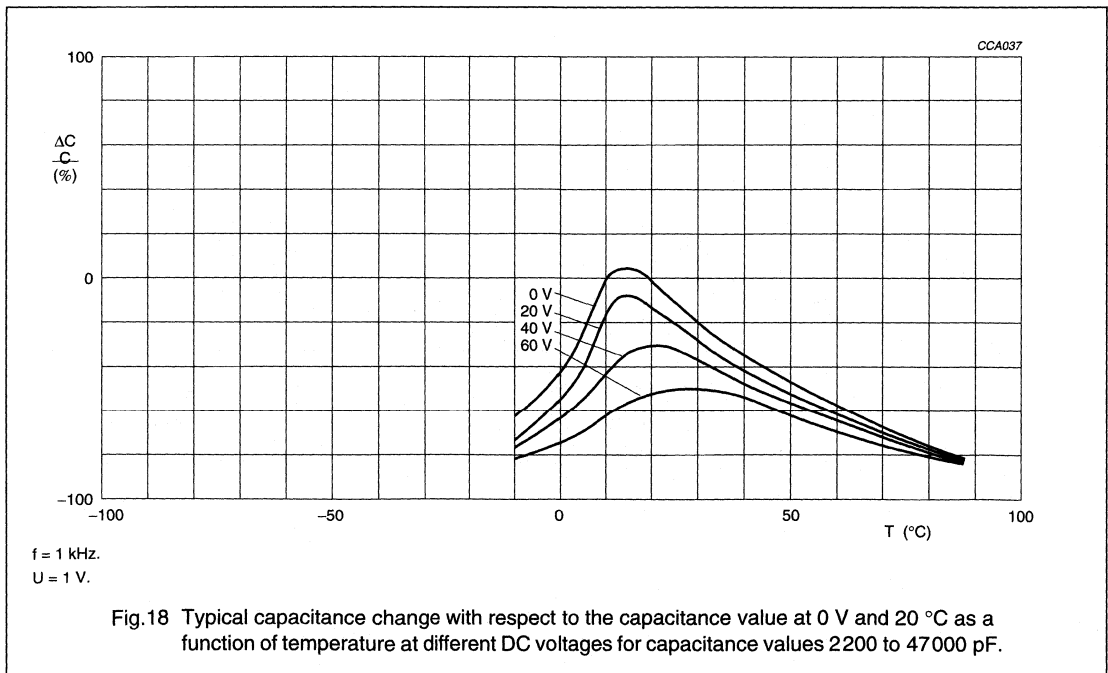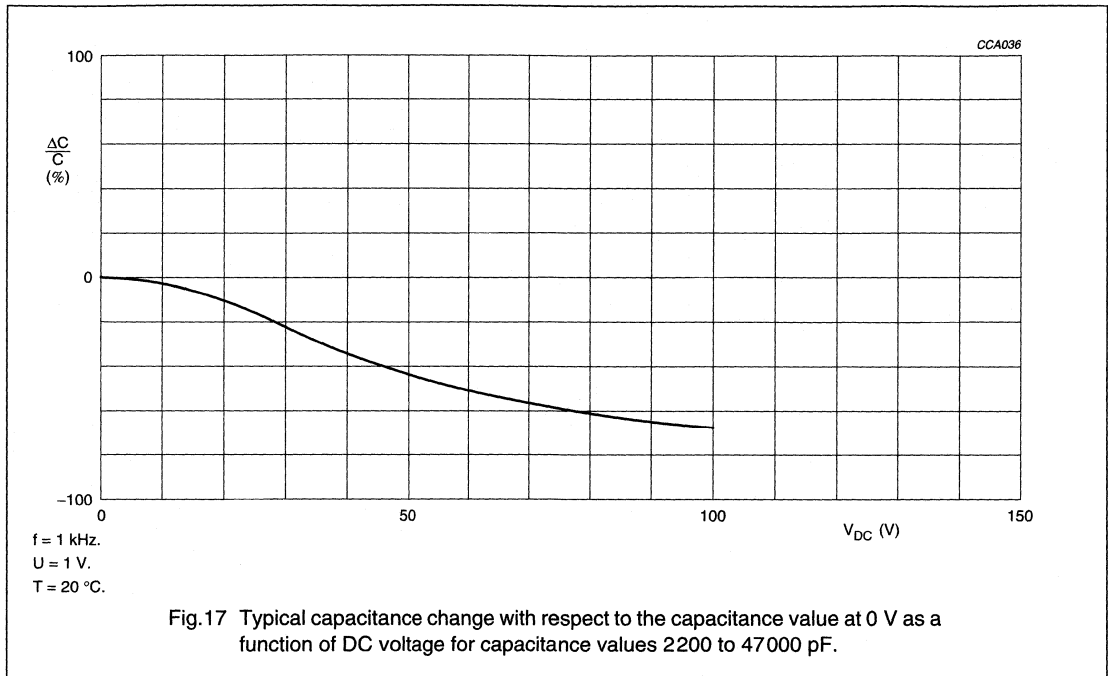

Miniature ceramic plate capacitors

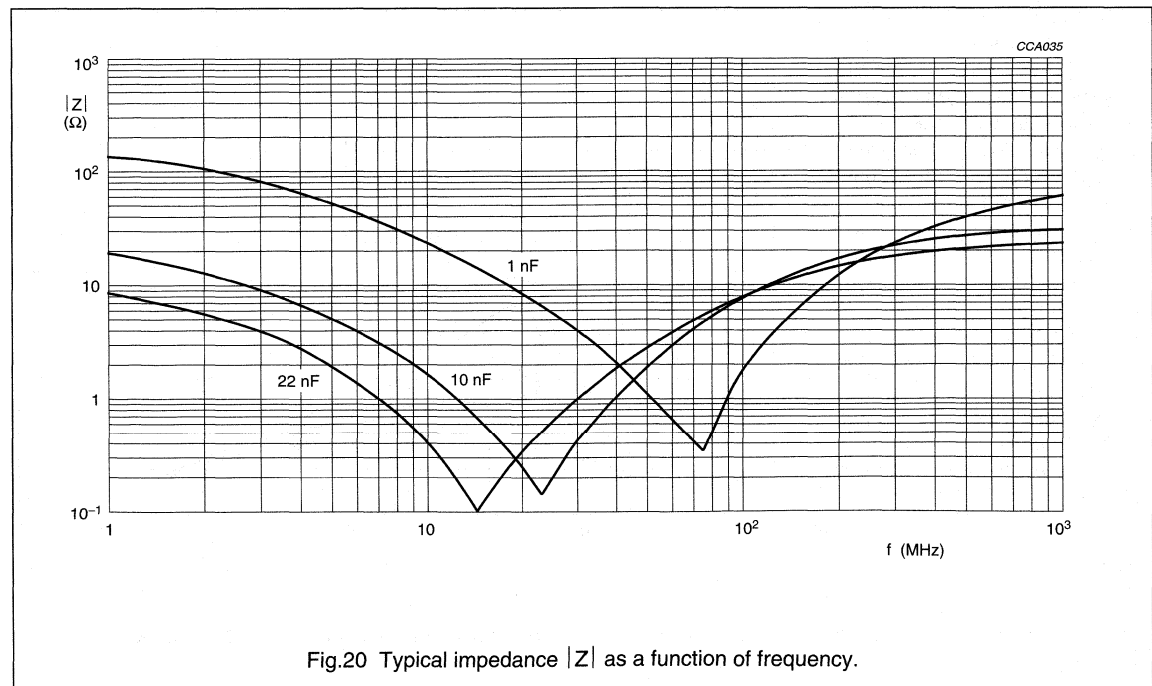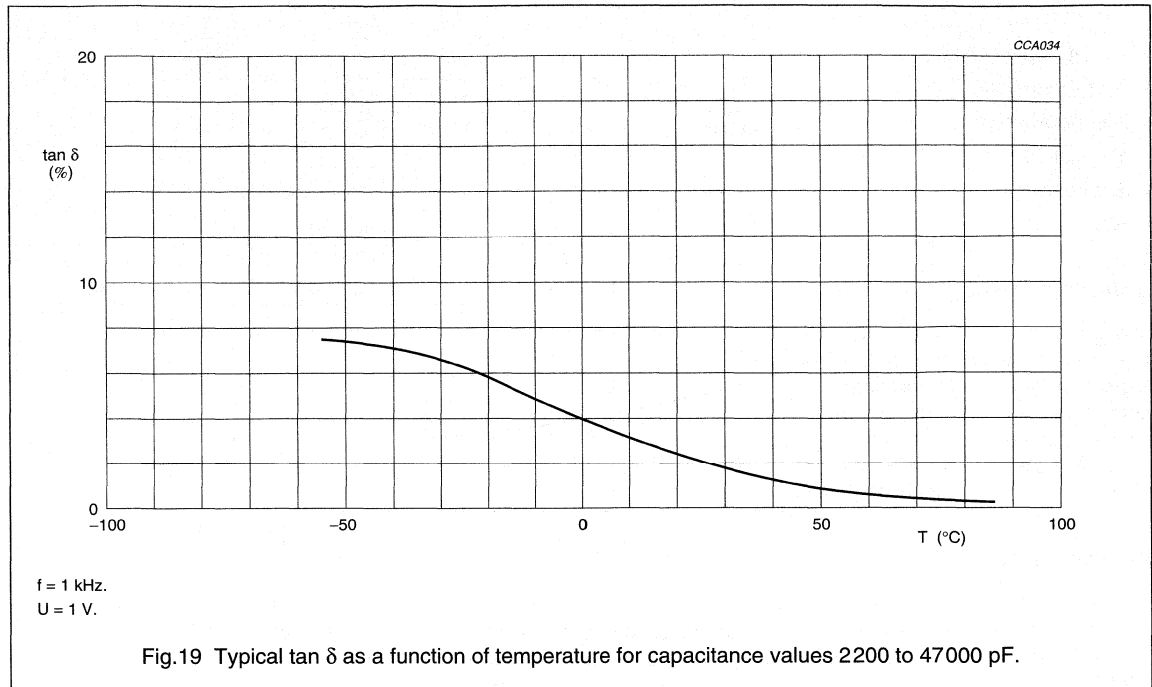Class 2, 63 V and 100 V (DC)
(flanged types)

Miniature ceramic plate capacitors

Class 1, 500 V (DC) (flanged types)

FEATURES

- Professional circuits
- High-frequency circuits
- Temperature compensating
- High stability
- Space saving
- High reliability.

APPLICATIONS


In a great variety of electronic circuits, e.g. in filters and tuning circuits where high stability and/or temperature compensation are a requirement. Because of their small size the capacitors are suitable for use in circuitry with high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized, and tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange, which guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion. The electrical properties are characterized by low losses, a narrow tolerance on capacitance (± 0.25 pF or 2%), high stability and, owing to the absence of silver, an extremely good DC behaviour.

QUICK REFERENCE DATA



DESCRIPTION	VALUE
Capacitance range (E12 series)	0.47 to 330 pF
Rated DC voltage	500 V
Tolerance on capacitance	$\pm 2\%$ or ± 0.25 pF
Temperature coefficients	P100, NP0, N150, N750 and N1500
Sectional specification	IEC 384-8
Climatic category (IEC 68)	55/085/21 (N150, N750); 55/150/56 (P100, NP0, N1500)

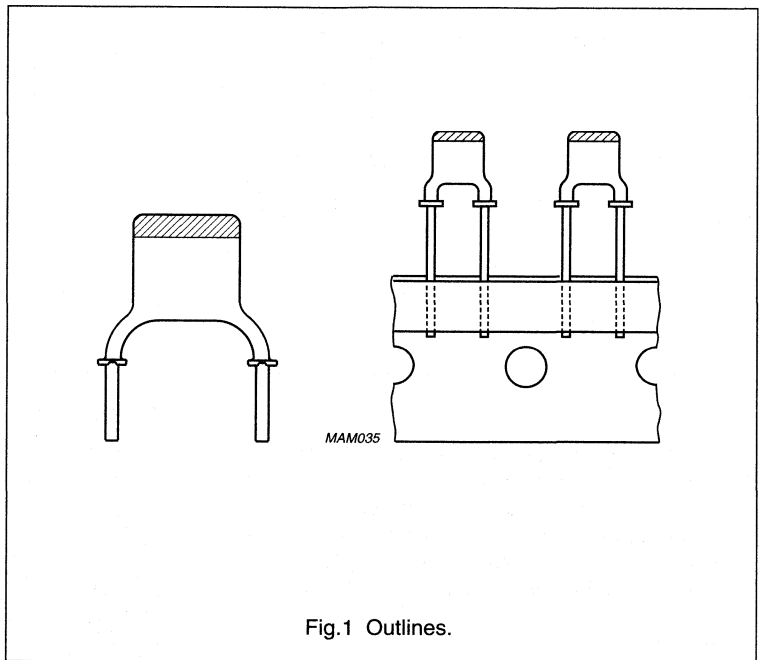

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)

MECHANICAL DATA

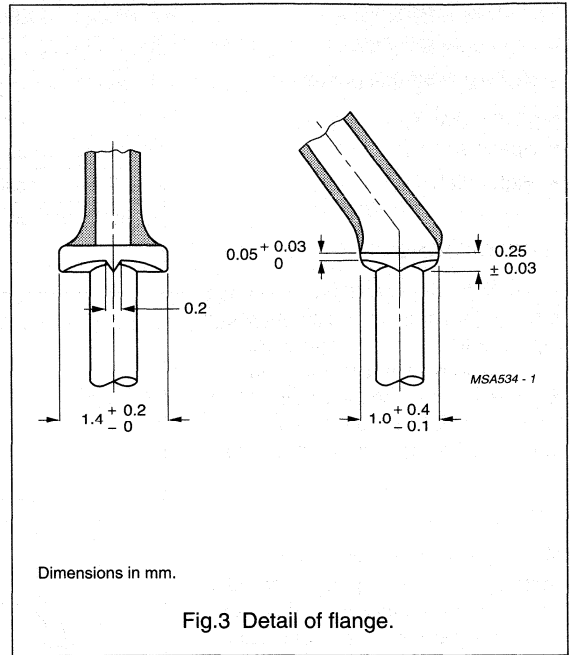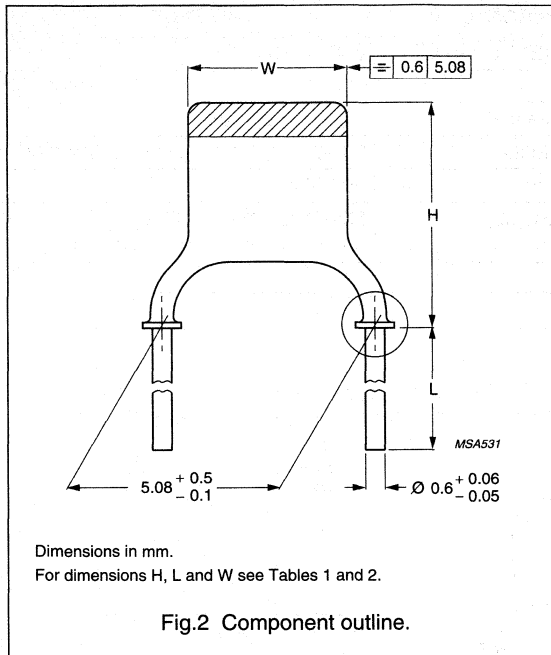

Marking

The body of the capacitors is coloured grey. The temperature coefficient is indicated by a colour code in accordance with IEC and EIA recommendations. Capacitance value and voltage are indicated by a marking code in a contrasting colour on the body. Refer to Tables 3 to 12, for marking codes and colours.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)	MASS (g)
I	3.6 (-1.1)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	11.2 (-3.1)	≈0.23

Notes

1. Unless indicated in Tables 4 to 12, the thickness of the capacitors does not exceed 2.3 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 1, 500 V (DC) (flanged types)

PACKAGING

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION

Table 2 Catalogue numbers

PITCH P	LEAD DIAMETER d	CATALOGUE NUMBERS ⁽¹⁾			
		BULK PACKED		ON TAPE (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
		L ≥ 13 mm	L = 4 ±0.5 mm		
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2222 652	2222 653	2222 654	2222 691

Notes

1. Catalogue numbers to be completed by adding the 5-digit suffix for required capacitance value, see Tables 4 to 12.
2. $H_0 = 18.25$ mm.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**Table 3** Conditions for Table 4; capacitors with temperature coefficient **P100 (M7G)**

DESCRIPTION	VALUE
Capacitance range	0.47 to 33 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$100 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	red/violet
Climatic category (IEC 68)	55/150/56

Table 4 Preferred capacitance range, temperature coefficient **P100 (M7G)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽³⁾ (V)	
0.47	±0.25 pF	I ⁽²⁾	p47	500	03477
0.56	±0.25 pF	I ⁽²⁾	p56	500	03567
0.68	±0.25 pF	I ⁽²⁾	p68	500	03687
0.82	±0.25 pF	I	p82	500	03827
1.0	±0.25 pF	I	1p0	500	03108
1.2	±0.25 pF	I	1p2	500	03128
1.5	±0.25 pF	I ⁽²⁾	1p5	500	03158
1.8	±0.25 pF	I	1p8	500	03188
2.2	±0.25 pF	I	2p2	500	03228
2.7	±0.25 pF	I	2p7	500	03278
3.3	±0.25 pF	I	3p3	500	03338
3.9	±0.25 pF	I	3p9	500	03398
4.7	±0.25 pF	IIA	4p7	500	03478
5.6	±0.25 pF	IIA	5p6	500	03568
6.8	±0.25 pF	IIB	6p8	500	03688
8.2	±0.25 pF	IIB	8p2	500	03828
10	±2%	III	10p	500	04109
12	±2%	III	12p	500	04129
15	±2%	III	15p	500	04159
18	±2%	IV	18p	500	04189
22	±2%	IV	22p	500	04229
27	±2%	V	27p	500	04279
33	±2%	V	33p	500	04339

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.
3. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**Table 5** Conditions for Table 6; capacitors with temperature coefficient **NP0 (C0G)**

DESCRIPTION	VALUE
Capacitance range	0.82 to 150 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$0 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	black
Climatic category (IEC 68)	55/150/56

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)

Table 6 Preferred capacitance range, temperature coefficient NP0 (COG)

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽⁴⁾ (V)	
0.82	±0.25 pF	I ⁽²⁾	p82	500	09827
1.0	±0.25 pF	I ⁽³⁾	1p0	500	09108
1.2	±0.25 pF	I ⁽³⁾	1p2	500	09128
1.5	±0.25 pF	I	1p5	500	09158
1.8	±0.25 pF	I	1p8	500	09188
2.2	±0.25 pF	I	2p2	500	09228
2.7	±0.25 pF	I	2p7	500	09278
3.3	±0.25 pF	I	3p3	500	09338
3.9	±0.25 pF	I	3p9	500	09398
4.7	±0.25 pF	I	4p7	500	09478
5.6	±0.25 pF	I	5p6	500	09568
6.8	±0.25 pF	I	6p8	500	09688
8.2	±0.25 pF	I	8p2	500	09828
10	±2%	I	10p	500	10109
12	±2%	I	12p	500	10129
15	±2%	IIA	15p	500	10159
18	±2%	IIA	18p	500	10189
22	±2%	IIA	22p	500	10229
27	±2%	IIB	27p	500	10279
33	±2%	IIB	33p	500	10339
39	±2%	IIB	39p	500	10399
47	±2%	III	47p	500	10479
56	±2%	III	56p	500	10569
68	±2%	IV	68p	500	10689
82	±2%	IV	82p	500	10829
100	±2%	IV	n10	500	10101
120	±2%	V	n12	500	10121
150	±2%	V	n15	500	10151

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.7 mm.
3. Maximum thickness 2.5 mm.
4. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**Table 7** Conditions for Table 8; capacitors with temperature coefficient **N150 (P2G)**

DESCRIPTION	VALUE
Capacitance range	2.2 to 150 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$-150 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 30 \times 10^{-6}/K$
Marking colour of the temperature coefficient	orange
Climatic category (IEC 68)	55/085/21

Table 8 Preferred capacitance range, temperature coefficient **N150 (P2G)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽³⁾ (V)	
2.2	±0.25 pF	I ⁽²⁾	2p2	500	33228
2.7	±0.25 pF	I ⁽²⁾	2p7	500	33278
3.3	±0.25 pF	I	3p3	500	33338
3.9	±0.25 pF	I	3p9	500	33398
4.7	±0.25 pF	I	4p7	500	33478
5.6	±0.25 pF	I	5p6	500	33568
6.8	±0.25 pF	I	6p8	500	33688
8.2	±0.25 pF	I	8p2	500	33828
10	±2%	I	10p	500	34109
12	±2%	I	12p	500	34129
15	±2%	IIA	15p	500	34159
18	±2%	IIA	18p	500	34189
22	±2%	IIA	22p	500	34229
27	±2%	IIB	27p	500	34279
33	±2%	IIB	33p	500	34339
39	±2%	IIB	39p	500	34399
47	±2%	III	47p	500	34479
56	±2%	III	56p	500	34569
68	±2%	IV	68p	500	34689
82	±2%	IV	82p	500	34829
100	±2%	IV	n10	500	34101
120	±2%	V	n12	500	34121
150	±2%	V	n15	500	34151

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 2.5 mm.
3. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**Table 9** Conditions for Table 10; capacitors with temperature coefficient **N750 (U2J)**

DESCRIPTION	VALUE
Capacitance range	1.8 to 120 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	$-750 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$\pm 120 \times 10^{-6}/K$
Marking colour of the temperature coefficient	violet
Climatic category (IEC 68)	55/085/21

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)

Table 10 Preferred capacitance range, temperature coefficient N750 (U2J)

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽⁵⁾ (V)	
1.8	±0.25 pF	I ⁽²⁾	1p8	500	57188
2.2	±0.25 pF	I ⁽³⁾	2p2	500	57228
2.7	±0.25 pF	I	2p7	500	57278
3.3	±0.25 pF	I	3p3	500	57338
3.9	±0.25 pF	I	3p9	500	57398
4.7	±0.25 pF	I ⁽⁴⁾	4p7	500	57478
5.6	±0.25 pF	I	5p6	500	57568
6.8	±0.25 pF	I	6p8	500	57688
8.2	±0.25 pF	I	8p2	500	57828
10	±2%	I	10p	500	58109
12	±2%	I	12p	500	58129
15	±2%	I	15p	500	58159
18	±2%	IIA	18p	500	58189
22	±2%	IIA	22p	500	58229
27	±2%	IIB	27p	500	58279
33	±2%	IIB	33p	500	58339
39	±2%	IIB	39p	500	58399
47	±2%	III	47p	500	58479
56	±2%	III	56p	500	58569
68	±2%	IV	68p	500	58689
82	±2%	IV	82p	500	58829
100	±2%	IV	n10	500	58101
120	±2%	V	n12	500	58121
150	±2%	V	n15	500	58151

Notes

1. Other capacitance values and tolerances are available on request.
2. Maximum thickness 3.0 mm.
3. Maximum thickness 2.5 mm.
4. Maximum thickness 2.7 mm.
5. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**Table 11** Conditions for Table 12; capacitors with temperature coefficient **N1500 (P3K)**

DESCRIPTION	VALUE
Capacitance range	8.2 to 270 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C \Delta T}\right)$	$-1500 \times 10^{-6}/K$
Tolerance on the temperature coefficient	$(-0 + 500) \times 10^{-6}/K$
Marking colour of the temperature coefficient	orange/orange
Climatic category (IEC 68)	55/150/56

Table 12 Preferred capacitance range, temperature coefficient **N1500 (P3K)**

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽⁴⁾ (V)	
8.2	±0.25 pF	I ⁽²⁾	8p2	500	69828
10	±2%	I ⁽³⁾	10p	500	70109
12	±2%	I ⁽³⁾	12p	500	70129
15	±2%	I	15p	500	70159
18	±2%	I	18p	500	70189
22	±2%	I	22p	500	70229
27	±2%	I	27p	500	70279
33	±2%	IIA	33p	500	70339
39	±2%	IIA	39p	500	70399
47	±2%	IIA	47p	500	70479
56	±2%	IIB	56p	500	70569
68	±2%	IIB	68p	500	70689
82	±2%	IIB	82p	500	70829
100	±2%	III	n10	500	70101
120	±2%	III	n12	500	70121
150	±2%	IV	n15	500	70151
180	±2%	IV	n18	500	70181
220	±2%	IV	n22	500	70221
270	±2%	V	n27	500	70271
330	±2%	V	n33	500	70331

Notes

- Other capacitance values and tolerances are available on request.
- Maximum thickness 3.0 mm.
- Maximum thickness 2.5 mm.
- The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 1, 500 V (DC)
(flanged types)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "IEC 384-8". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values (note 1) measured at 1 MHz, ≤ 5 V	see Tables 4 to 12
Rated DC voltage	500 V
DC test voltage; duration 1 minute	1250 V
DC test voltage of coating; duration 1 minute	1250 V
Insulation resistance at 500 V (DC) after 1 minute	$>10000 \text{ M}\Omega$
Tan δ (note 1) measured at 1 MHz, ≤ 5 V:	
C ≤ 50 pF	$\leq 15 \left(\frac{15}{C} + 0.7 \right) \times 10^{-4}$
C > 50 pF	$\leq 15 \times 10^{-4}$
Category temperature range	-55 to +85 °C (N150, N750); -55 to +150 °C (P100, NP0, N1500)
Storage temperature range	-55 to +85 °C

Note

- Including 2 mm per connecting lead.

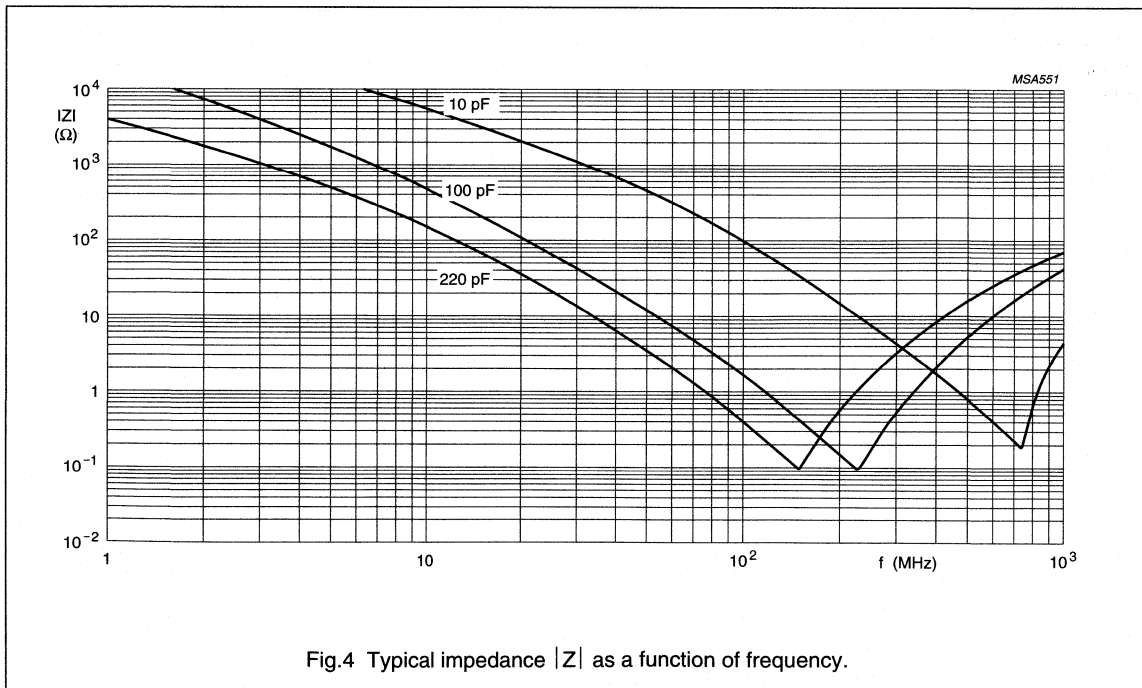


Fig.4 Typical impedance $|Z|$ as a function of frequency.

Miniature ceramic plate capacitors

Class 2, 500 V (DC) (flanged types)

FEATURES

- Professional circuits
- Coupling and decoupling
- Space saving
- High reliability
- High temperature circuits.

APPLICATIONS

In electronic circuits where non-linear change of capacitance with temperature is permissible and low losses are not essential, e.g. coupling and decoupling. Because of their small size, the capacitors are ideal for circuitry with high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized. The tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange. The flange guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range (E12 series)	100 to 4700 pF
Dielectric material	K2000
Rated DC voltage	500 V
Tolerance on capacitance	±10%
Sectional specification	IEC 384-9 (2C2 and 2D1) EIA (X5S/X8U)
Climatic category (IEC 68)	55/150/56



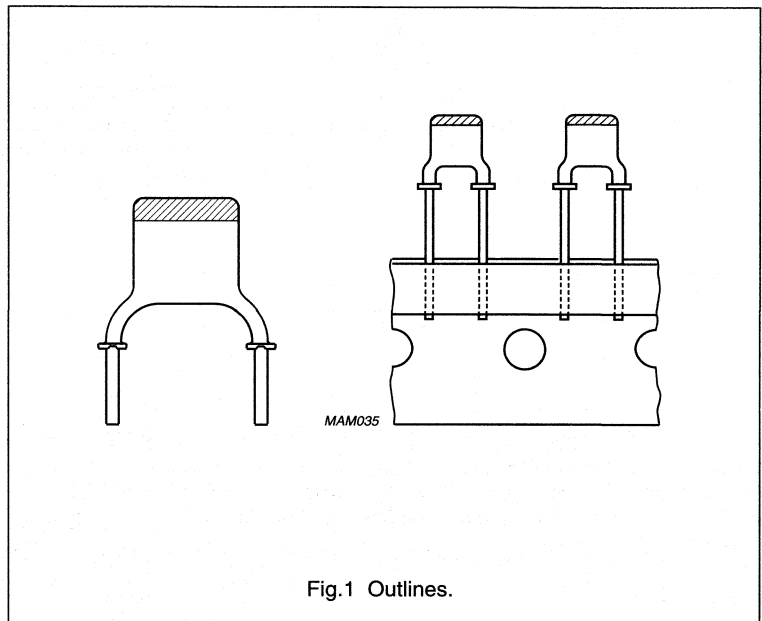


Fig.1 Outlines.

Miniature ceramic plate capacitors

Class 2, 500 V (DC)
(flanged types)

MECHANICAL DATA

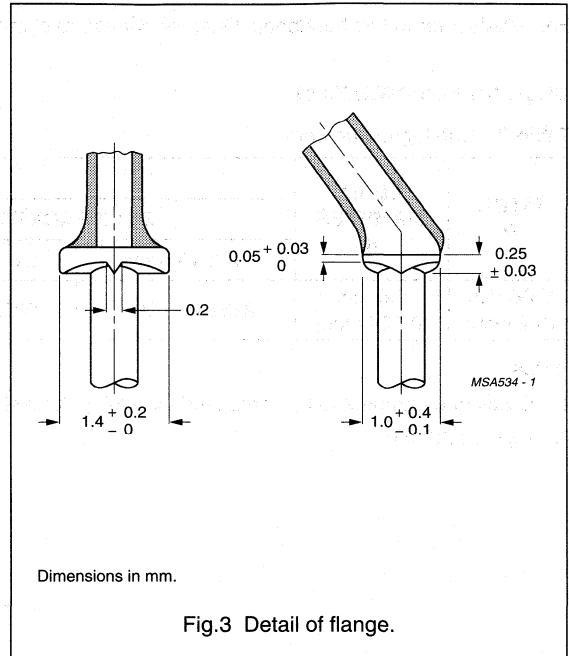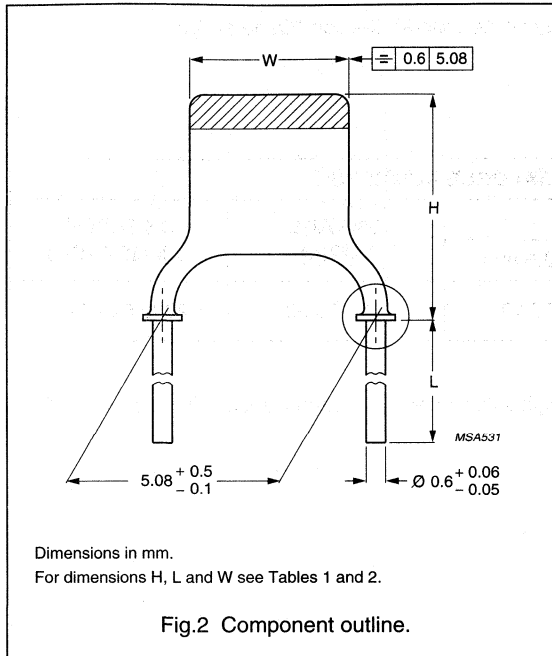

Marking

The body of the capacitors is tan coloured. The temperature dependence is indicated by a yellow coloured cap. Capacitance value and voltage are indicated by a marking code in a contrasting colour on the body. Refer to Table 3 for marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)	MASS (g)
I	3.6 (-1.1)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	11.2 (-3.1)	≈0.23

Notes

1. Unless indicated in Table 3 the thickness of the capacitors does not exceed 2.3 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 2, 500 V (DC) (flanged types)

PACKAGING

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION

Table 2 Catalogue numbers

PITCH P	LEAD DIAMETER d	CATALOGUE NUMBERS ⁽¹⁾			
		BULK PACKED		ON TAPE (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
		L ≥ 13 mm	L = 4 ±0.5 mm		
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2222 655 09...	2222 655 19...	2222 655 53...	2222 655 63...

Notes

1. Catalogue numbers to be completed by adding the last 3-digit suffix for required capacitance value, see Table 3.
2. $H_0 = 18.25$ mm.

Miniature ceramic plate capacitors

Class 2, 500 V (DC)
(flanged types)

Table 3 Preferred range of values

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBERS (see Table 2)
		VALUE	VOLTAGE ⁽³⁾ (V)	
100	I ⁽¹⁾	n10	500	101
120	I ⁽²⁾	n12	500	121
150	I	n15	500	151
180	I	n18	500	181
220	I	n22	500	221
270	I	n27	500	271
330	I	n33	500	331
390	IIA	n39	500	391
470	IIA	n47	500	471
560	IIA	n56	500	561
680	IIB	n68	500	681
820	IIB	n82	500	821
1000	IIB	1n0	500	102
1200	III	1n2	500	122
1500	III	1n5	500	152
1800	III	1n8	500	182
2200	IV	2n2	500	222
2700	IV	2n7	500	272
3300	V	3n3	500	332
3900	V	3n9	500	392
4700	V	4n7	500	472

Notes


1. Maximum thickness 2.7 mm.
2. Maximum thickness 2.5 mm.
3. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 2, 500 V (DC)
(flanged types)**ELECTRICAL CHARACTERISTICS**



The capacitors meet the essential requirements of "IEC 384-9". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	100 to 4700 pF (E12 series)
Tolerance on the capacitance, after 1000 hours	$\pm 10\%$
Dielectric material	K2000
Rated DC voltage	500 V
DC test voltage; duration 1 minute	1250 V
DC test voltage of coating; duration 1 minute	1250 V
Insulation resistance at 500 V (DC) after 1 minute	$>4000 \text{ M}\Omega$
Tan δ measured at 1 kHz, 1 V	$<3.5\%$
Category temperature range	-55 to $+85$ °C (2C2) and -55 to $+150$ °C (2D1)
Storage temperature range	-55 to $+85$ °C
Capacitance change as a function of temperature	see Fig.4
Capacitance change as a function of frequency	see Fig.5
Climatic category (IEC 68)	55/150/56
Ageing	typical 1.5% per time decade

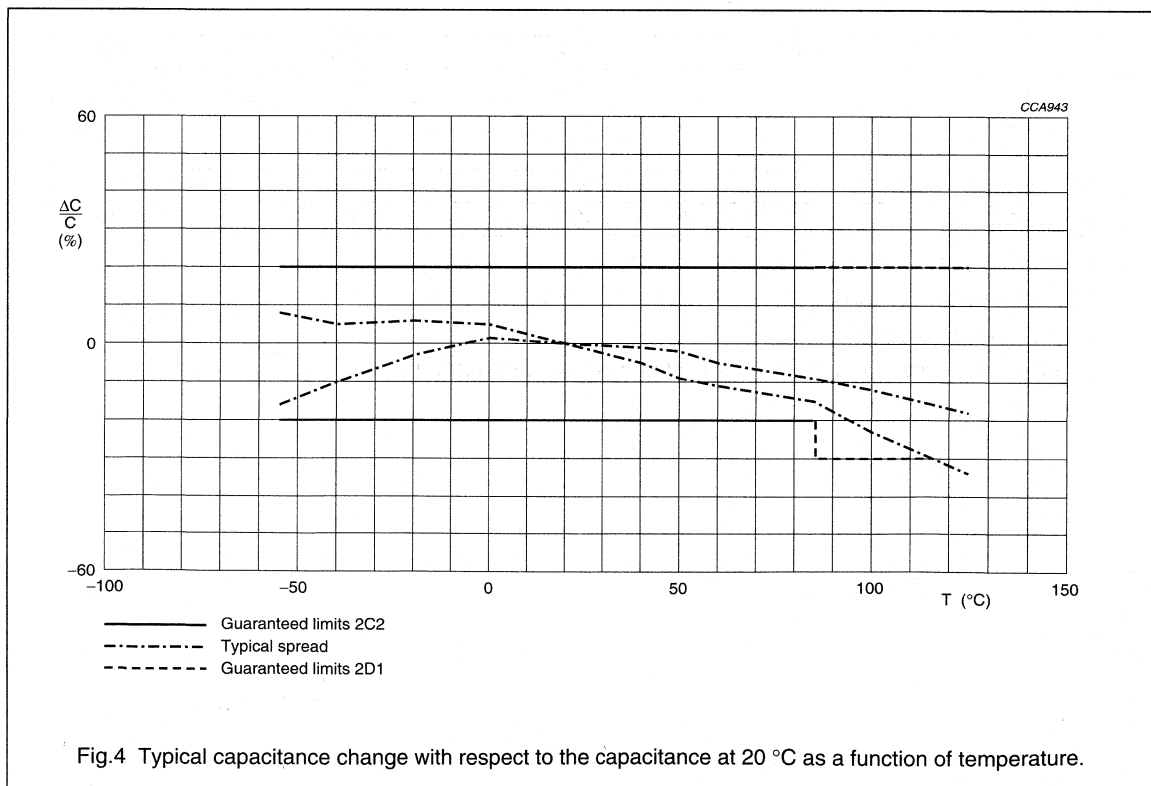

Miniature ceramic plate capacitors

Class 2, 500 V (DC)
(flanged types)

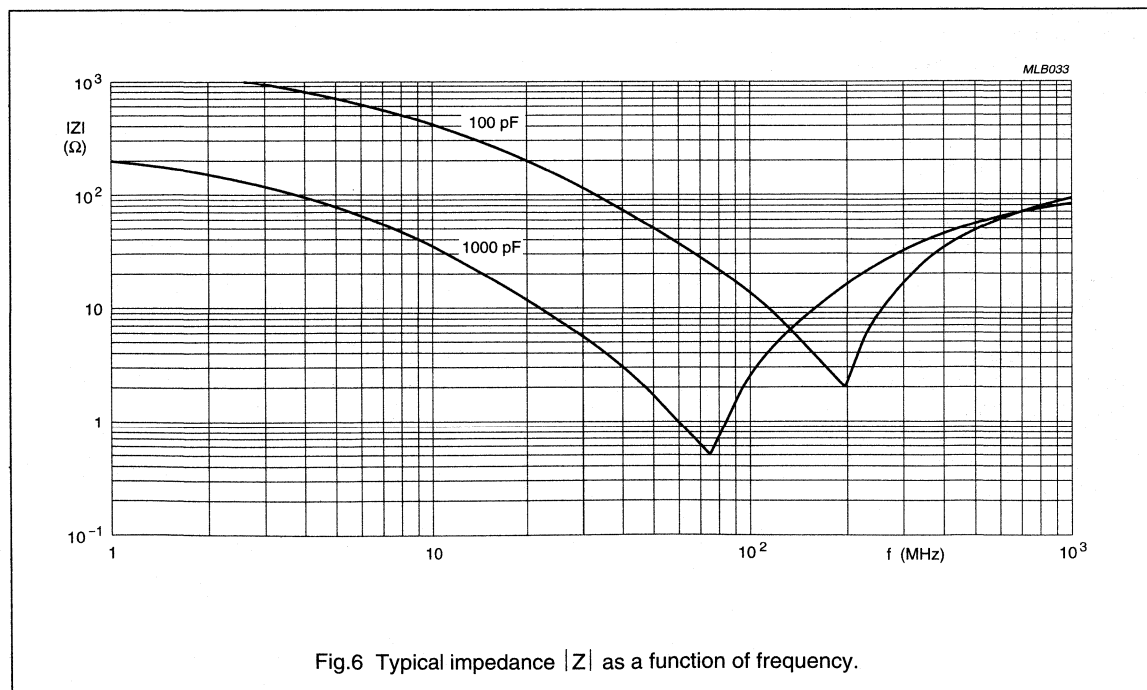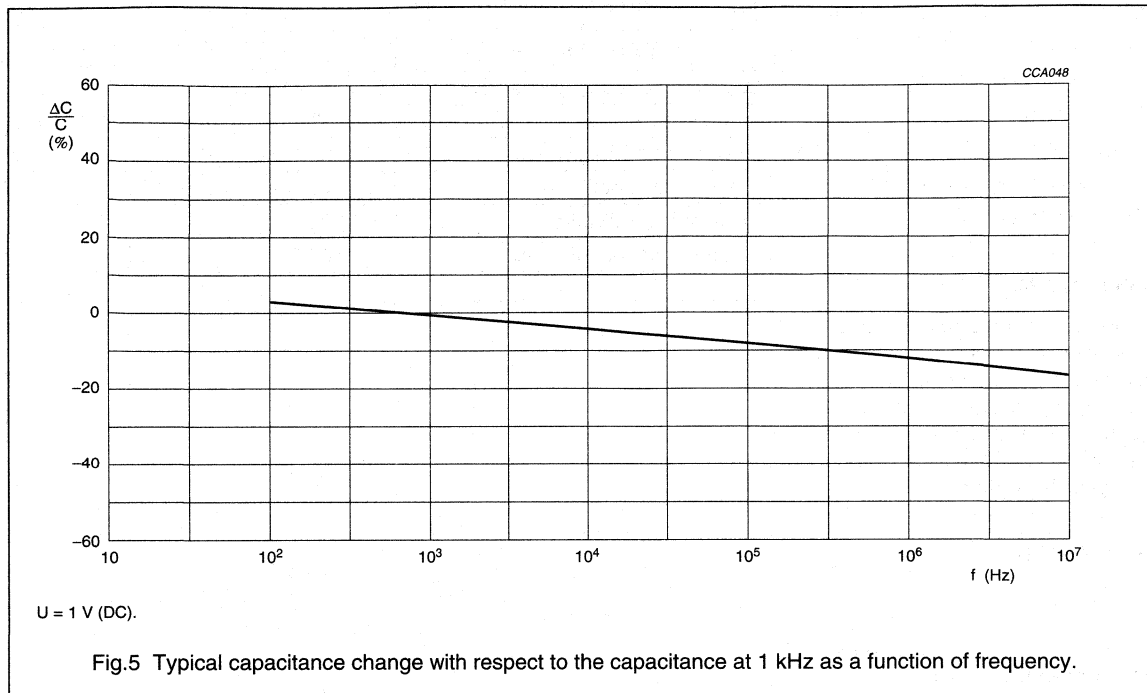

Miniature ceramic plate capacitors

Class 1, 1000 V (DC) (flanged types)

FEATURES

- High reliability
- High-frequency circuits
- High stability
- Space saving
- High temperature circuits
- Professional circuits.

APPLICATIONS

In a great variety of electronic circuits, e.g. in filters and tuning circuits where stability and low losses are a requirement. Because of their small size the capacitors are suitable for use in circuitry with high component density such as SMPS.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized, and tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange, which guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion. The electrical properties are characterized by low losses, a narrow tolerance on capacitance (± 0.25 pF or 5%), high stability and, owing to the absence of silver, an extremely good DC behaviour.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Capacitance range (E12 series)	0.47 to 150 pF
Rated DC voltage	1000 V
Tolerance on capacitance	$\pm 5\%$ or ± 0.25 pF
Temperature coefficient	SL ($+150$ to $-1500 \times 10^{-6}/K$)
Sectional specification	IEC 384-8
Climatic category (IEC 68)	55/150/56



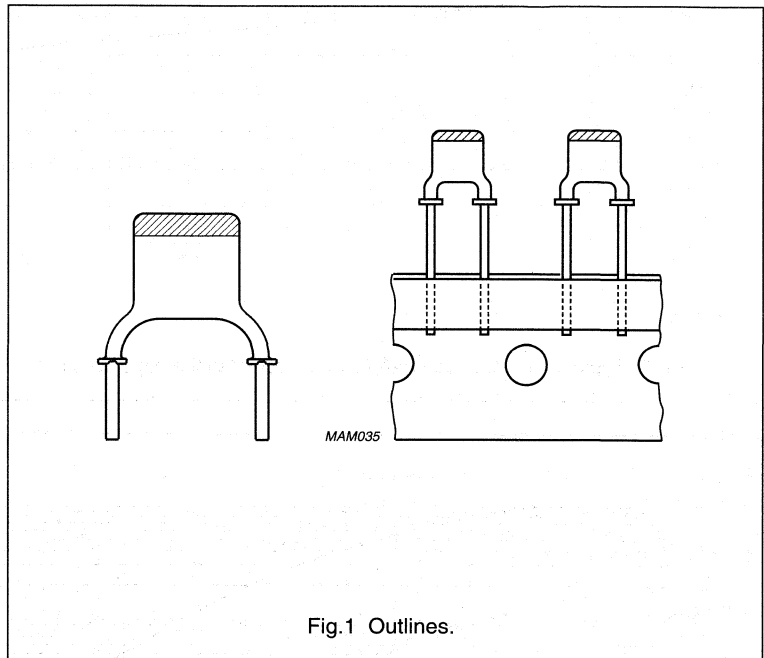


Fig.1 Outlines.

Miniature ceramic plate capacitors

Class 1, 1000 V (DC)
(flanged types)

MECHANICAL DATA

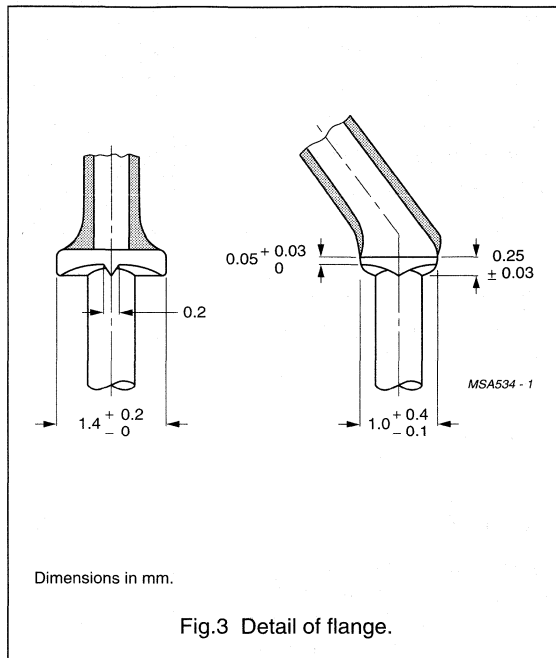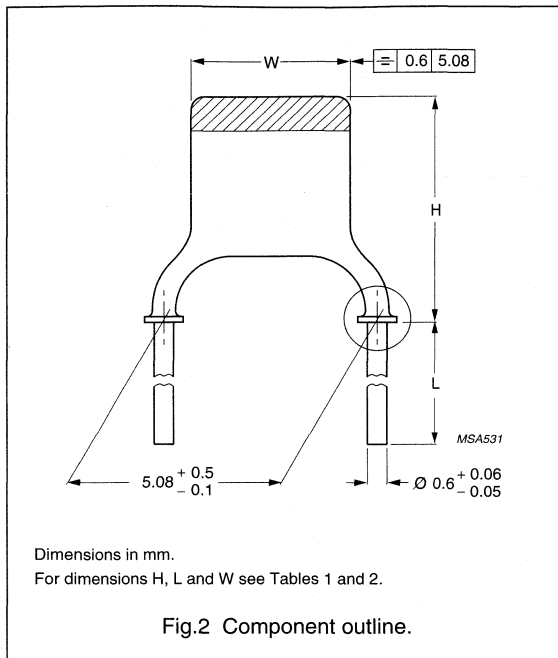

Marking

The body of the capacitors is coloured tan. Capacitance value and voltage are indicated by a marking code in a contrasting colour on the body. Refer to Tables 3 and 4 for colour and marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)	MASS (g)
I	3.6 (-1.1)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	11.2 (-3.1)	≈0.23

Notes

1. Unless indicated in Table 4, the thickness of the capacitors does not exceed 3 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 1, 1000 V (DC)
(flanged types)**PACKAGING**

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION**Table 2** Catalogue numbers

PITCH P	LEAD DIAMETER d	CATALOGUE NUMBERS ⁽¹⁾			
		BULK PACKED		ON TAPE (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
		L ≥ 13 mm	L = 4 ±0.5 mm		
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2222 694 09...	2222 694 19...	2222 694 53...	2222 694 63...

Notes

1. Catalogue numbers to be completed by adding the last 3-digit suffix for required capacitance value, see Table 4.
2. H₀ = 18.25 mm.

Table 3 Conditions for Table 4; capacitors with temperature coefficient **SL**

DESCRIPTION	VALUE
Capacitance range	0.47 to 150 pF (E12 series)
Temperature coefficient of the capacitance $\left(\frac{\Delta C}{C\Delta T}\right)$	+150 × 10 ⁻⁶ /K to -1500 × 10 ⁻⁶ /K
Marking colour of the temperature coefficient	none

Miniature ceramic plate capacitors

Class 1, 1000 V (DC)
(flanged types)

Table 4 Preferred capacitance range, temperature coefficient SL

CAPACITANCE VALUE ⁽¹⁾ (pF)	TOLERANCE	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBER (see Table 2)
			VALUE	VOLTAGE ⁽²⁾	
0.47	±0.25 pF	I	p47	1 kV	477
0.56	±0.25 pF	I	p56	1 kV	567
0.68	±0.25 pF	I	p68	1 kV	687
0.82	±0.25 pF	I	p82	1 kV	827
1.0	±0.25 pF	I	1p0	1 kV	108
1.2	±0.25 pF	I	1p2	1 kV	128
1.5	±0.25 pF	I	1p5	1 kV	158
1.8	±0.25 pF	I	1p8	1 kV	188
2.2	±0.25 pF	I	2p2	1 kV	228
2.7	±0.25 pF	I	2p7	1 kV	278
3.3	±0.25 pF	I	3p3	1 kV	338
3.9	±0.25 pF	I	3p9	1 kV	398
4.7	±0.25 pF	I	4p7	1 kV	478
5.6	±0.25 pF	I	5p6	1 kV	568
6.8	±0.25 pF	I	6p8	1 kV	688
8.2	±0.25 pF	I	8p2	1 kV	828
10	±5%	I	10p	1 kV	109
12	±5%	I	12p	1 kV	129
15	±5%	I	15p	1 kV	159
18	±5%	IIA	18p	1 kV	189
22	±5%	IIA	22p	1 kV	229
27	±5%	IIB	27p	1 kV	279
33	±5%	IIB	33p	1 kV	339
39	±5%	IIB	39p	1 kV	399
47	±5%	III	47p	1 kV	479
56	±5%	III	56p	1 kV	569
68	±5%	III	68p	1 kV	689
82	±5%	IV	82p	1 kV	829
100	±5%	IV	n10	1 kV	101
120	±5%	V	n12	1 kV	121
150	±5%	V	n15	1 kV	151

Notes

1. Other capacitance values and tolerances are available on request.
2. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors


Class 1, 1000 V (DC)
(flanged types)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "IEC 384-8". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values (note 1) measured at 1 MHz, ≤ 5 V	see Table 4
Rated DC voltage	1000 V
DC test voltage; duration 1 minute	2000 V
DC test voltage of coating; duration 1 minute	2000 V
Insulation resistance at 500 V (DC) after 1 minute	>10 000 M Ω
Tan δ (note 1) measured at 1 MHz, ≤ 5 V:	
C ≤ 50 pF	$\leq 15 \left(\frac{15}{C} + 0.7 \right) \times 10^{-4}$
C > 50 pF	$\leq 15 \times 10^{-4}$
Category temperature range	-55 to +150 °C
Storage temperature range	-55 to +85 °C
Climatic category (IEC 68)	55/150/56

Note

- Including 2 mm per connecting lead.

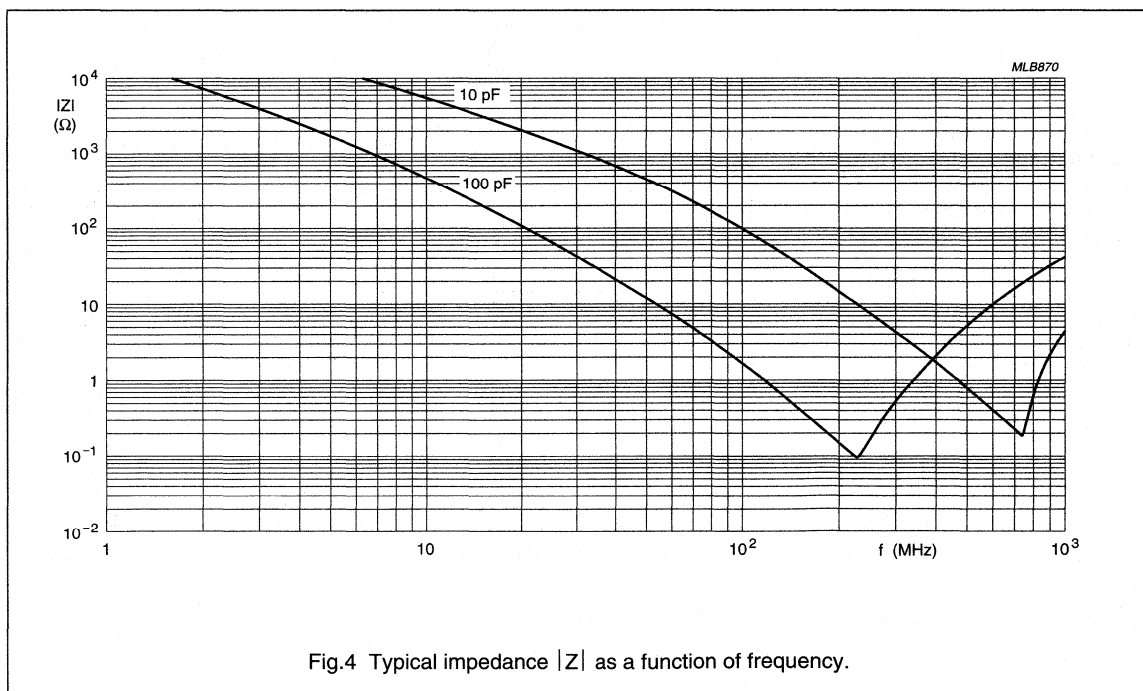

Miniature ceramic plate capacitors

Class 2, 1000 V (DC) (2C2 and 2D1 flanged types)

FEATURES

- High reliability
- Coupling and decoupling
- Space saving
- High temperature circuits
- Professional circuits.

APPLICATIONS


In electronic circuits where non-linear change of capacitance with temperature is permissible and low losses are not essential, e.g. coupling and decoupling. Because of their small size, the capacitors are ideal for circuitry with high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized. The tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange. The flange guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion.

QUICK REFERENCE DATA



DESCRIPTION	VALUE
Capacitance range (E12 series)	100 to 1800 pF
Dielectric material	K2000
Rated DC voltage	1000 V
Tolerance on capacitance	±10%
Sectional specification	IEC 384-9 (2C2 and 2D1); EIA (X5S/X8U)
Climatic category (IEC 68)	55/150/56

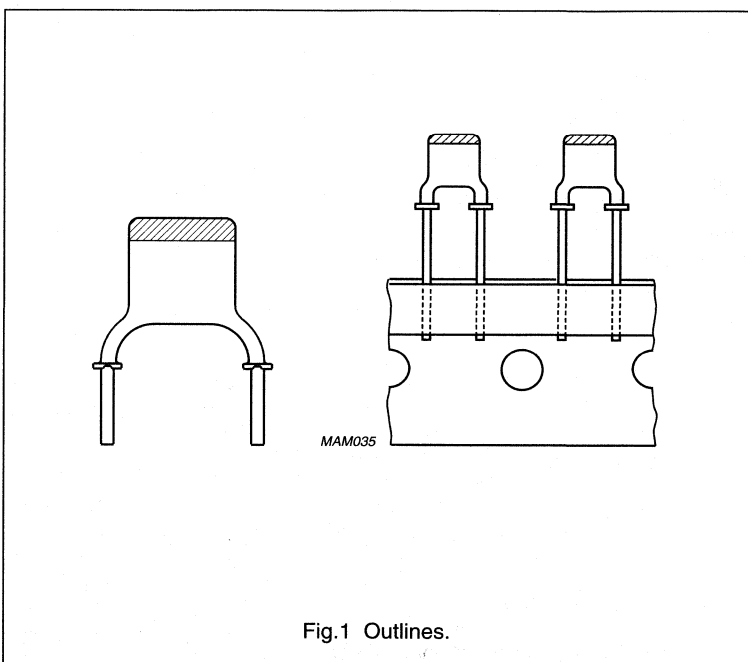

Miniature ceramic plate capacitors

Class 2, 1000 V (DC)
(2C2 and 2D1 flanged types)

MECHANICAL DATA

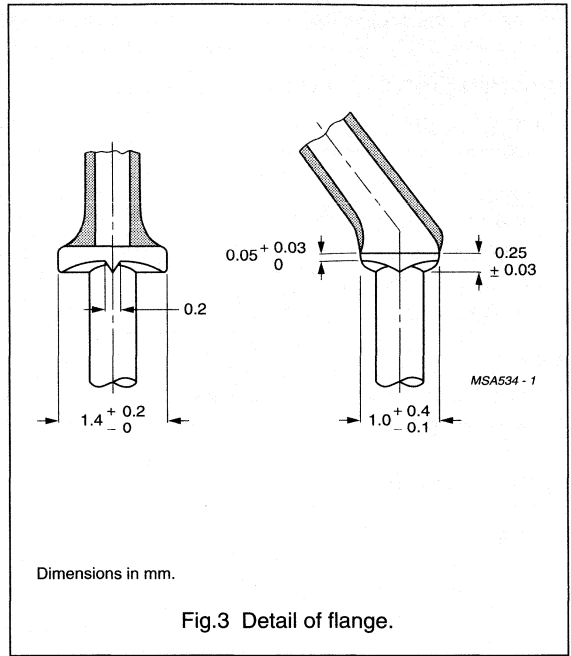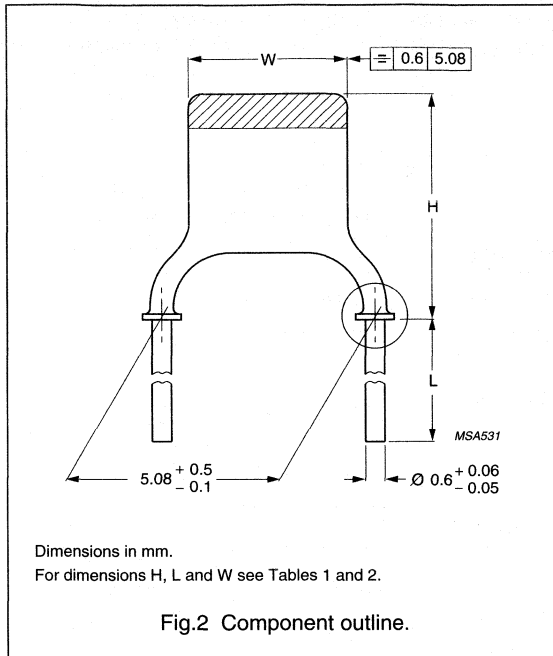

Marking

The body of the capacitors is tan coloured. The temperature dependency is indicated by a yellow coloured cap. Capacitance value and voltage are indicated by a marking code on the body. Refer to Table 3 for marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)	MASS (g)
I	3.6 (-1.1)	6.3 (-1.8)	≈0.14
IIA	3.9 (-1.4)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	7.3 (-2.4)	≈0.15
III	5.3 (-1.8)	8.1 (-2.6)	≈0.17
IV	6.2 (-2.0)	9.0 (-2.7)	≈0.20
V	6.2 (-2.0)	11.2 (-3.1)	≈0.23

Notes

1. Unless indicated in Table 3, the thickness of the capacitors does not exceed 3.0 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 2, 1000 V (DC)
(2C2 and 2D1 flanged types)**PACKAGING**

For details refer to this handbook, Chapter "Miniature ceramic plate capacitors", Section "General data".

ORDERING INFORMATION**Table 2** Catalogue numbers

PITCH P	LEAD DIAMETER d	CATALOGUE NUMBERS ⁽¹⁾			
		BULK PACKED		ON TAPE ⁽²⁾ (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
		L ≥ 13 mm	L = 4 ±0.5 mm		
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2222 693 09...	2222 693 19...	2222 693 53...	2222 693 63...

Notes

1. Catalogue numbers to be completed by adding the 3-digit suffix for required capacitance value, see Table 3.
2. H₀ = 18.25 mm.

Table 3 Preferred range of values

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBERS (see Table 2)
		VALUE	VOLTAGE ⁽¹⁾	
100	I	n10	1 kV	101
120	I	n12	1 kV	121
150	I	n15	1 kV	151
180	IIA	n18	1 kV	181
220	IIA	n22	1 kV	221
270	IIA	n27	1 kV	271
330	IIB	n33	1 kV	331
390	IIB	n39	1 kV	391
470	IIB	n47	1 kV	471
560	III	n56	1 kV	561
680	III	n68	1 kV	681
820	IV	n82	1 kV	821
1000	IV	1n0	1 kV	102
1200	IV	1n2	1 kV	122
1500	V	1n5	1 kV	152
1800	V	1n8	1 kV	182

Note


1. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors

Class 2, 1000 V (DC)
(2C2 and 2D1 flanged types)**ELECTRICAL CHARACTERISTICS**



The capacitors meet the essential requirements of "IEC 384-9". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.

DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	see Table 3
Tolerance on the capacitance, after 1000 hours	$\pm 10\%$
Rated DC voltage	1000 V
DC test voltage; duration 1 minute	2000 V
DC test voltage of coating; duration 1 minute	2000 V
Insulation resistance at 500 V (DC) after 1 minute	$>6000 \text{ M}\Omega$
Tan δ measured at 1 kHz, 1 V	$<3.5\%$
Category temperature range	-55 to $+85$ °C (2C2) and -55 to $+150$ °C (2D1)
Storage temperature range	-55 to $+85$ °C
Capacitance change as a function of temperature	see Fig.4
Capacitance change as a function of frequency	see Fig.5
Climatic category (IEC 68)	55/150/56
Ageing	typical 1.5% per time decade

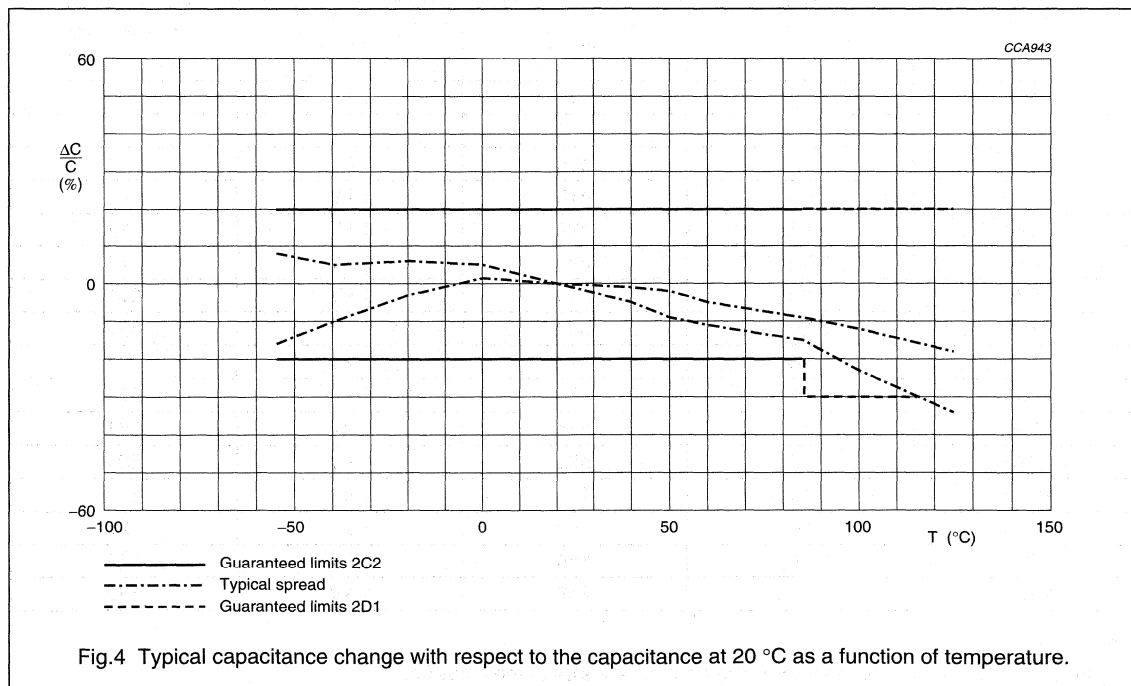

Miniature ceramic plate capacitors

Class 2, 1000 V (DC) (2C2 and 2D1 flanged types)

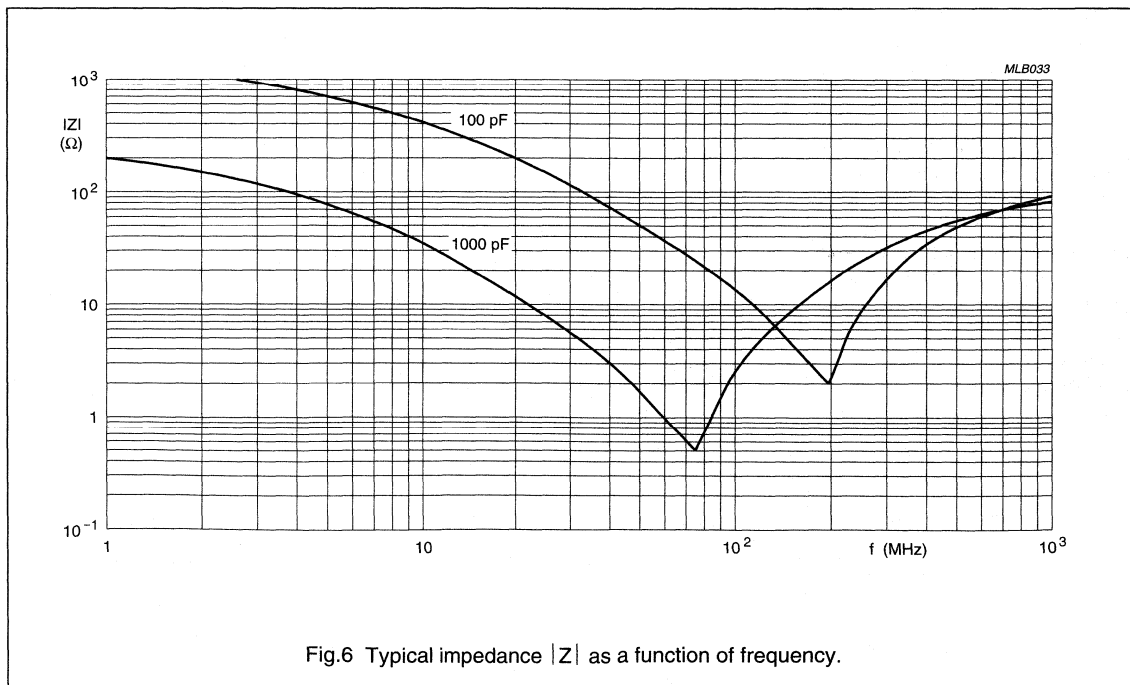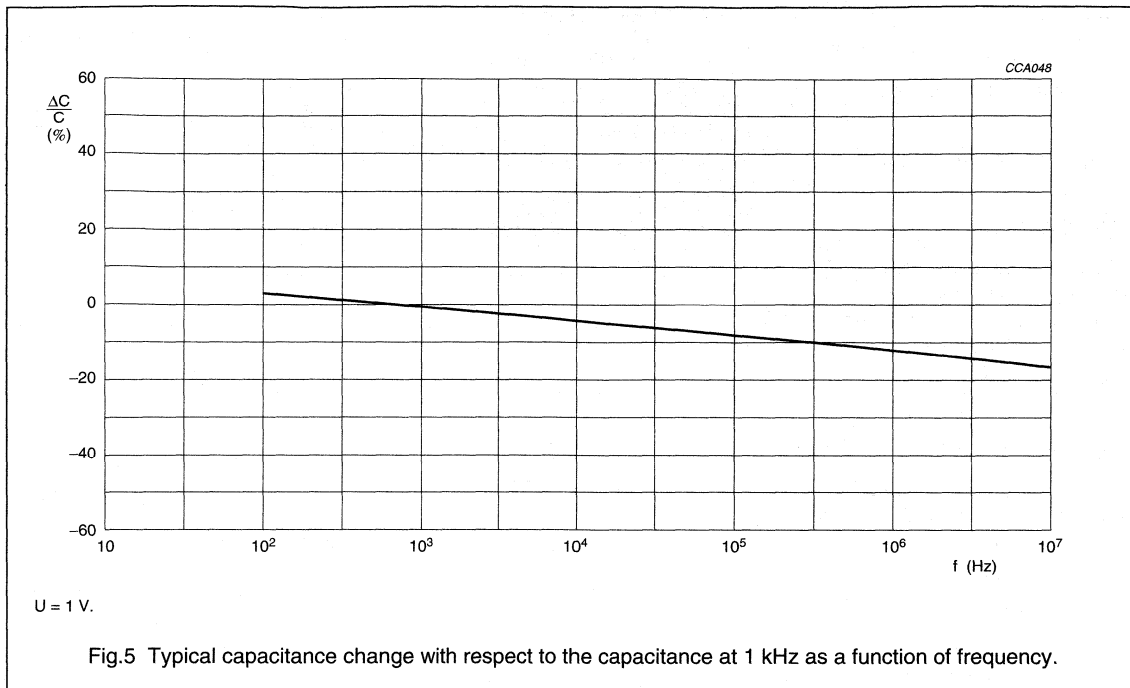

Miniature ceramic plate capacitors

Class 2, low loss, 1000 V (DC) (2E2 flanged types)

FEATURES

- High reliability
- Coupling and decoupling
- Space saving
- High temperature circuits.

APPLICATIONS

In electronic circuits where high reliability and low losses with frequency and temperature are essential, for example:

- HF ballast
- SMPS
- Snubber and high voltage circuits.


Because of their small sizes, the capacitors are ideal for circuitry with a high component density.

DESCRIPTION

The capacitors consist of a thin rectangular ceramic plate, both sides of which are metallized. The tinned connecting leads are secured using a high melting point solder. The capacitors are encapsulated in epoxy lacquer, which is resistant to all commonly used cleaning solvents. They have small dimensions and narrow tolerances on the lead spacing. The leads are provided with a flange. The flange guarantees that the leads are free of lacquer, and its shape allows soldering gasses to escape freely, ensuring excellent solderability. This makes the capacitors suitable for both hand-mounting and automatic insertion.

QUICK REFERENCE DATA



DESCRIPTION	VALUE
Capacitance range (E12 series)	270 to 3300 pF
Rated DC voltage	1000 V
Tolerance on capacitance	±20%
Sectional specification	IEC 384-9 (2E2)
Climatic category (IEC 68)	55/105/56

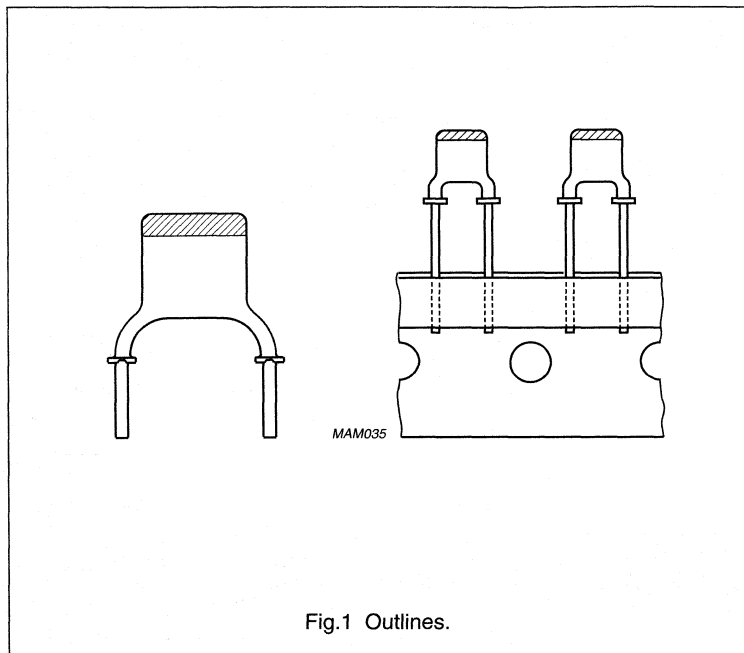

Miniature ceramic plate capacitors

Class 2, low loss, 1000 V (DC)
(2E2 flanged types)

MECHANICAL DATA

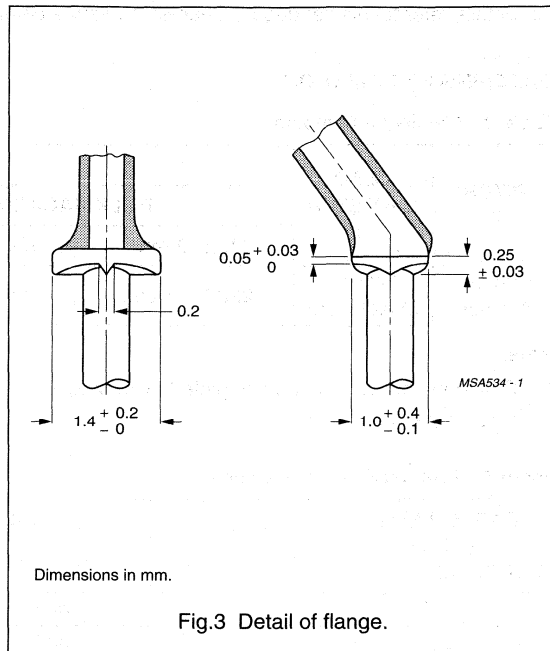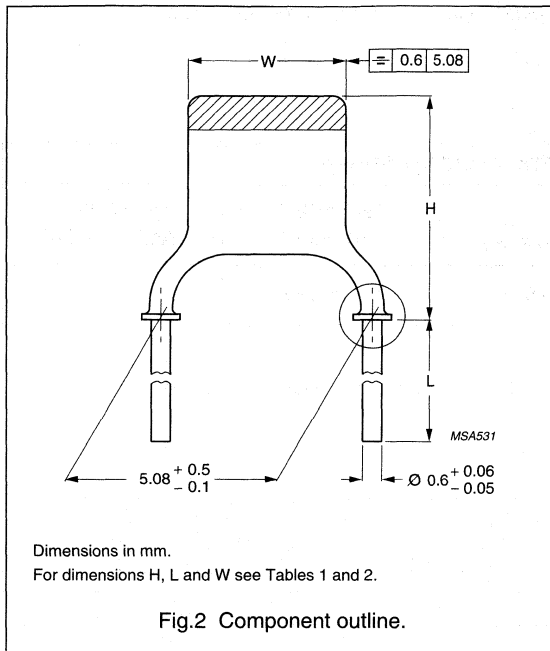

Marking

The body of the capacitors is tan coloured. The temperature dependency is indicated by a blue coloured cap. Capacitance value and voltage are indicated by a marking code on the body. Refer to Table 3 for marking codes.

Mounting

When bending, cutting or flattening, the leads should be relieved of the applied load by supporting them at the capacitor body.

Soldering conditions:

max. 265 °C, max. 10 s.

The capacitors are suitable for mounting on printed-circuit boards (hand-mounting or automatic insertion).

Physical dimensions

Table 1 Capacitor dimensions and mass

SIZE ⁽¹⁾	W ⁽²⁾ (mm)	H ⁽²⁾ (mm)	MASS (g)
I	3.6 (-1.1)	6.3 (-1.8)	≈0.15
IIA	3.9 (-1.4)	6.7 (-2.0)	≈0.15
IIB	4.5 (-1.8)	7.3 (-2.4)	≈0.18
III	5.3 (-1.8)	8.1 (-2.6)	≈0.22
IV	6.2 (-2.0)	9.0 (-2.7)	≈0.33
V	6.2 (-2.0)	11.2 (-3.1)	≈0.47

Notes

1. Unless indicated in Table 3, the thickness of the capacitors does not exceed 3.0 mm.
2. Tolerances are given between parentheses.

Miniature ceramic plate capacitors

Class 2, low loss, 1000 V (DC)
(2E2 flanged types)**PACKAGING**

For details refer to this handbook, Chapter 'Miniature ceramic plate capacitors', Section "General data".

ORDERING INFORMATION**Table 2** Catalogue numbers

PITCH P	LEAD DIAMETER d	CATALOGUE NUMBERS ⁽¹⁾			
		BULK PACKED		ON TAPE ⁽²⁾ (REEL)	ON TAPE ⁽²⁾ (AMMOPACK)
		L ≥ 13 mm	L = 4 ±0.5 mm		
5.08 mm (0.2 inch)	0.6 mm (0.024 inch)	2222 695 09...	2222 695 19...	2222 695 53...	2222 695 63...

Notes

1. Catalogue numbers to be completed by adding the 3-digit suffix for required capacitance value, see Table 3.
2. H₀ = 18.25 mm.

Table 3 Preferred range of values

CAPACITANCE VALUE (pF)	SIZE (see Table 1)	MARKING CODE		SUFFIX OF CATALOGUE NUMBERS (see Table 2)
		VALUE	VOLTAGE ⁽¹⁾	
270	I	n27	1 kV	271
330	I	n33	1 kV	331
390	IIA	n39	1 kV	391
470	IIA	n47	1 kV	471
560	IIA	n56	1 kV	561
680	IIB	n68	1 kV	681
820	IIB	n82	1 kV	821
1000	III	1n0	1 kV	102
1200	III	1n2	1 kV	122
1500	III	1n5	1 kV	152
1800	IV	1n8	1 kV	182
2200	IV	2n2	1 kV	222
2700	V	2n7	1 kV	272
3300	V	3n3	1 kV	332

Note


1. The voltage code may be marked on the front or rear side of the capacitor.

Miniature ceramic plate capacitors



Class 2, low loss, 1000 V (DC)
(2E2 flanged types)**ELECTRICAL CHARACTERISTICS**

The capacitors meet the essential requirements of "IEC 384-9". Unless stated otherwise all electrical values apply at an ambient temperature of 20 ± 1 °C, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 63 to 67%.


DESCRIPTION	VALUE
Capacitance values measured at 1 kHz, 1 V	see Table 3
Tolerance on the capacitance, after 1000 hours	$\pm 20\%$
Rated DC voltage	1000 V
DC test voltage; duration 1 minute	2000 V
DC test voltage of coating; duration 1 minute	2000 V
Insulation resistance at 500 V (DC) after 1 minute	$>6\,000\ \text{M}\Omega$
Tan δ measured at 1 kHz, 1 V	$<1\%$
Category temperature range	-55 to $+105$ °C (2E2)
Storage temperature range	-55 to $+85$ °C
Typical capacitance change as a function of frequency	see Fig.5
Typical tan δ as a function of frequency	see Fig.6
Climatic category (IEC 68)	55/105/56
Ageing	typical 5% per time decade

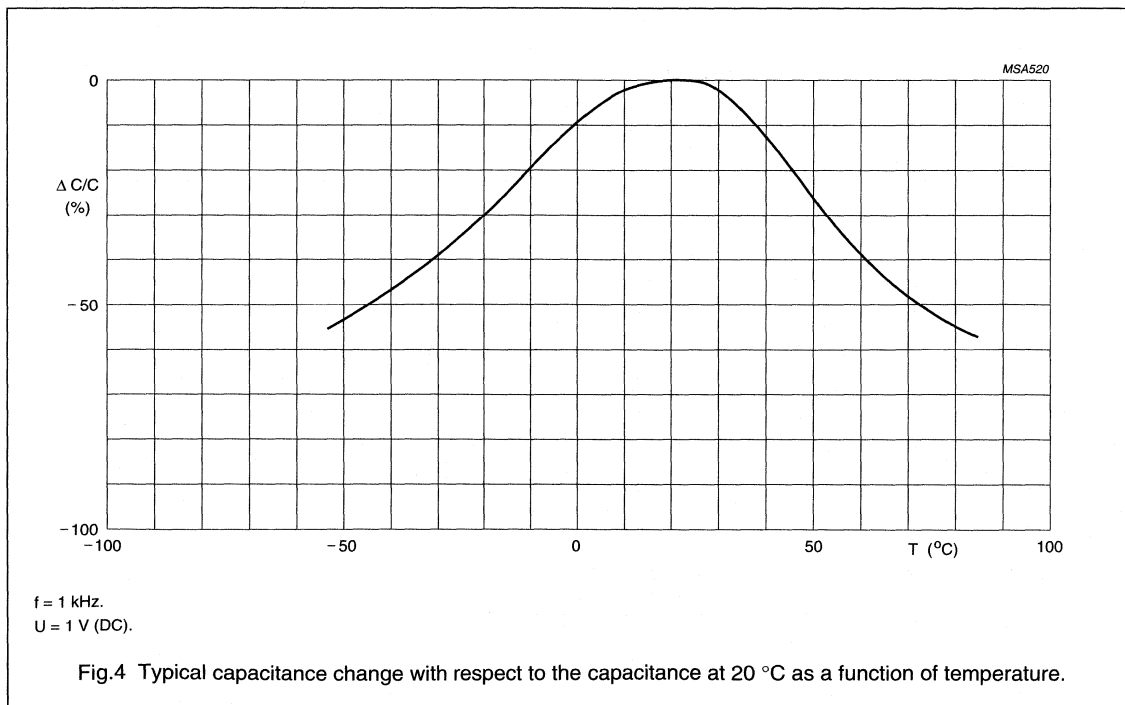

Miniature ceramic plate capacitors

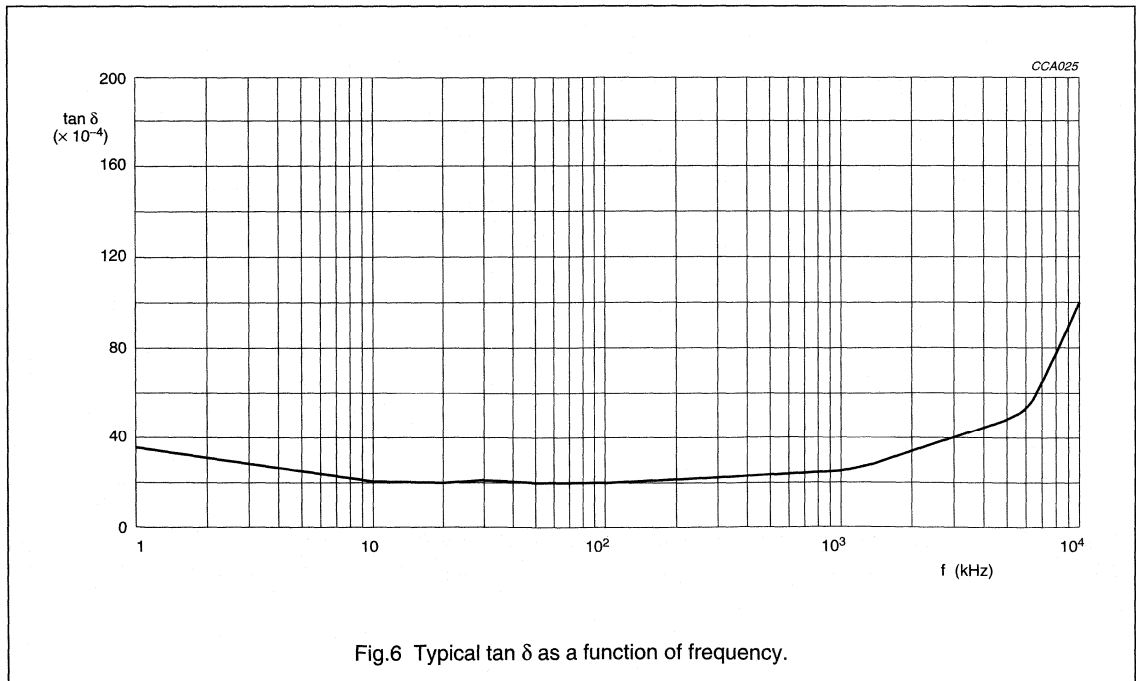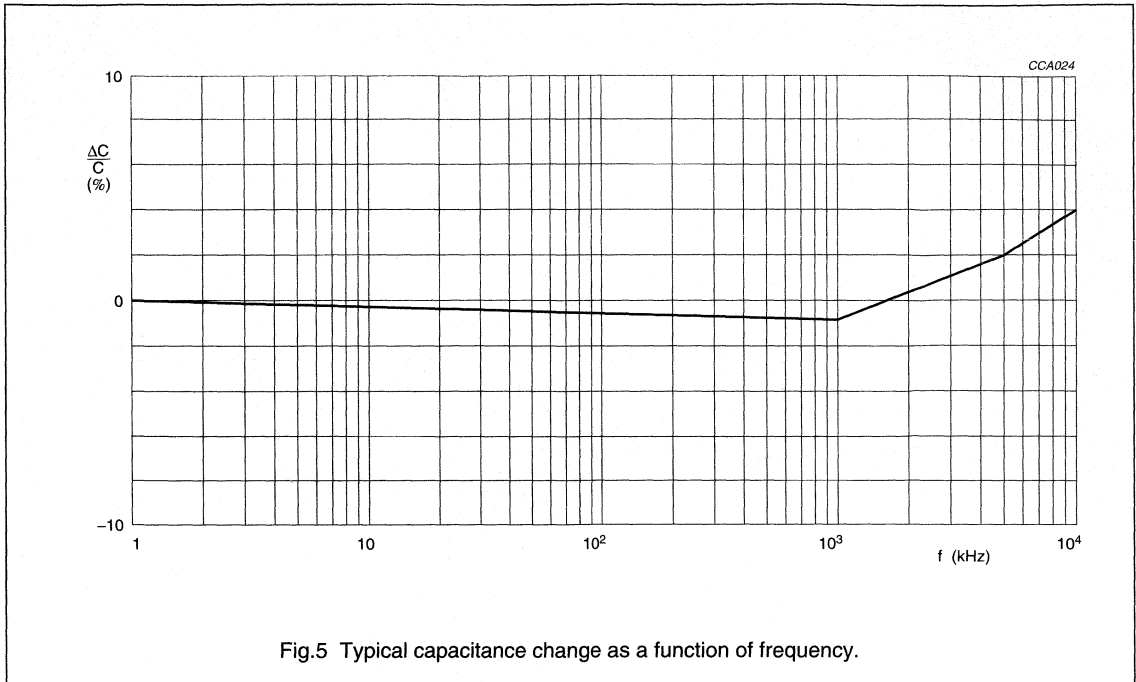Class 2, low loss, 1000 V (DC)
(2E2 flanged types)

Miniature ceramic plate capacitors

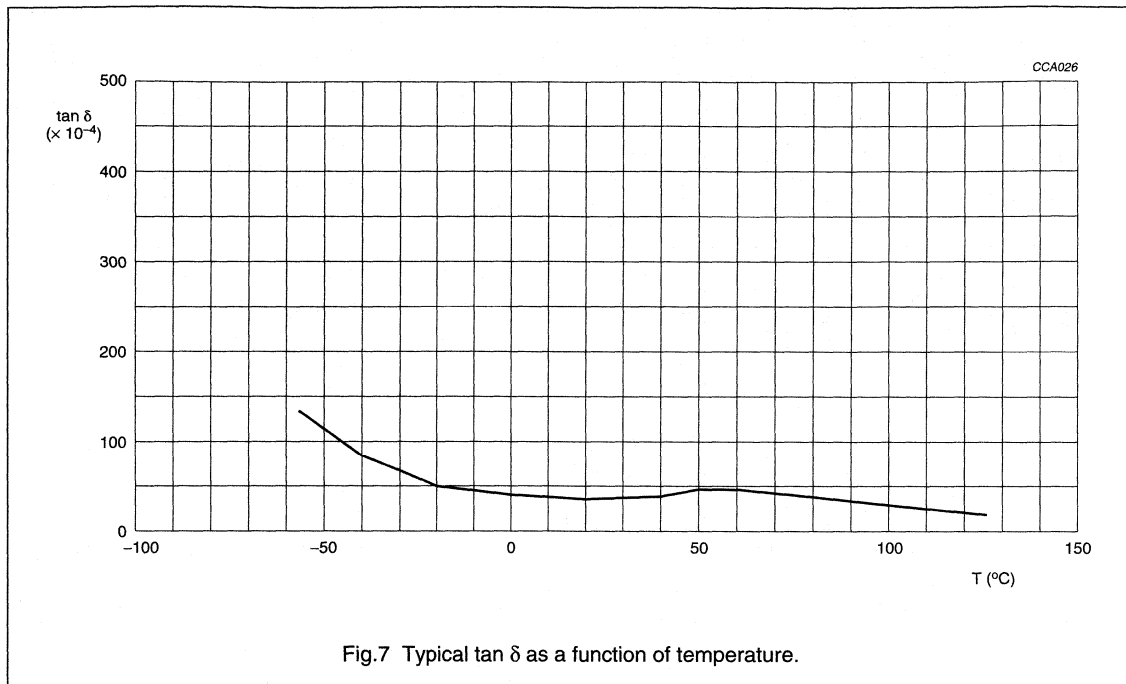Class 2, low loss, 1000 V (DC)
(2E2 flanged types)

Miniature ceramic plate capacitors

Sample kits

SAMPLE KITS: MINIATURE CERAMIC PLATE CAPACITORS

TC (TK) ⁽¹⁾	CAP. TOL.		U _{R(DC)} (V)	LEAD SPACING (mm)	LEAD LENGTH (mm)	CAPACITANCE VALUES ⁽²⁾ (pF)	SAMPLES PER VALUE	SAMPLES PER KIT	ORDER NUMBER (2222)
	<10 pF (pF)	≥10 pF (%)							
Sample kits on plastic blisters									
NP0 precision (C0G) ⁽³⁾	±0.1	±1		5.08	>13	1; 1.5; 2.2; 3.3; 4.7; 6.8; 10; 12; 15; 22; 33; 47; 68; 100; 120; 150; 180; 220	50	900	683 90001
P100 (M7G)	±0.25	±2		5.08	>13	0.56; 0.68; 0.82; 1; 1.2; 1.5; 2.2; 3.3; 4.7; 6.8; 10; 12; 15; 22; 27; 33; 39; 47	50	900	683 04001
NP0 (C0G)	±0.25	±2		5.08	>13	1.8; 2.2; 2.7; 3.3; 4.7; 6.8; 10; 12; 15; 22; 33; 47; 68; 100; 120; 150; 180; 220	50	900	683 10001
N150 (P2G)	±0.25	±2	100	5.08	>13	3.9; 4.7; 6.8; 10; 12; 15; 18; 22; 27; 33; 47; 68; 82; 100; 120; 150; 180; 220	50	900	683 34001
N750 (U2J)	±0.25	±2		5.08	>13	3.9; 4.7; 6.8; 10; 12; 15; 18; 22; 33; 47; 68; 100; 120; 150; 180; 220; 270; 330	50	900	683 58001
N1500 (P3K)	-	±2		5.08	>13	18; 22; 27; 33; 39; 47; 68; 82; 100; 120; 150; 180; 220; 270; 330; 390; 470; 560	50	900	683 70001
2C2/2E1 (X5S/X7T)	-	±10		5.08	>13	180; 220; 330; 470; 560; 680; 820; 1000; 1200; 1500; 1800; 2200; 2700; 3300; 3900; 4700; 5600; 6800	50	900	630 09001
2E2 (X5U)	-	-20/+50		5.08	>13	1000; 1200; 1500; 2200; 3300; 4700; 6800; 10000; 15000	100	900	640 09001
2F6 (Y5V)	-	-20/+80	63	5.08	>13	1000; 1500; 2200; 4700; 10000; 15000; 22000; 33000; 47000	100	900	629 09001
NP0 precision (C0G) ⁽³⁾	±0.1	±1		5.08	>13	0.82; 1; 1.2; 1.5; 2.2; 3.3; 4.7; 6.8; 10; 12; 15; 22; 33; 47; 68; 100; 120; 150	50	900	652 90001
P100 (M7G)	±0.25	±2		5.08	>13	0.47; 0.56; 0.68; 0.82; 1; 1.2; 1.5; 1.8; 2.2; 3.3; 4.7; 6.8; 10; 12; 15; 22; 27; 33	50	900	652 04001
NP0 (C0G)	±0.25	±2	500	5.08	>13	1; 1.5; 1.8; 2.2; 2.7; 3.3; 4.7; 6.8; 10; 12; 15; 22; 33; 47; 68; 100; 120; 150	50	900	652 10001
N150 (P2G)	±0.25	±2		5.08	>13	2.2; 3.3; 3.9; 4.7; 6.8; 10; 12; 15; 18; 22; 27; 33; 47; 68; 82; 100; 120; 150	50	900	652 34001
N750 (U2J)	±0.25	±2		5.08	>13	1.8; 2.2; 2.7; 3.3; 3.9; 4.7; 6.8; 10; 12; 15; 18; 22; 33; 47; 68; 100; 120; 150	50	900	652 58001
N1500 (P3K)	-	±2		5.08	>13	10; 12; 15; 18; 22; 27; 33; 39; 47; 68; 82; 100; 120; 150; 180; 220; 270; 330	50	900	652 70001

Miniature ceramic plate capacitors

Sample kits

TC (TK) ⁽¹⁾	CAP. TOL.		U _{R(DC)} (V)	LEAD SPACING (mm)	LEAD LENGTH (mm)	CAPACITANCE VALUES ⁽²⁾ (pF)	SAMPLES PER VALUE	SAMPLES PER KIT	ORDER NUMBER (2222)
	<10 pF (pF)	≥10 pF (%)							
2C2/2E1 (X5S/X7T)	-	±10	500	5.08	>13	100; 150; 180; 220; 270; 330; 470; 560; 680; 820; 1000; 1200; 1500; 1800; 2200; 2700; 3300; 3900; 4700	50	900	655 09001
SL (P100 to N1500)	±0.25	±5	1000	5.08	>13	0.47; 1; 1.5; 1.8; 2.2; 2.7; 3.3; 4.7; 6.8; 10; 12; 15; 22; 33; 47; 68; 100; 120	25	450	694 09001
2C2/2E1 (X5S/X7T)	-	±10	1000	5.08	>13	100; 150; 180; 220; 270; 330; 470; 680; 1000; 1200	50	450	693 09001
2E2 (X5U)	-	±20		5.08	>13	270; 330; 470; 680; 1000; 1500; 2200; 2700; 3300	50	450	695 09001
Sample kits in cardboard boxes									
NP0 precision (C0G) ⁽³⁾	±0.1	±1		5.08	>13	1; 2.2; 4.7; 10; 15; 22; 47; 100; 150; 220	500	5000	683 90002
P100 (M7G)	±0.25	±2		5.08	>13	0.56; 1; 1.5; 2.2; 4.7; 10; 15; 22; 33; 47	500	5000	683 04002
NP0 (C0G)	±0.25	±2		5.08	>13	1.5; 2.7; 4.7; 10; 15; 22; 47; 100; 150; 220	500	5000	683 10002
N150 (P2G)	±0.25	±2	100	5.08	>13	3.9; 4.7; 10; 15; 22; 47; 68; 100; 150; 220	500	5000	683 34002
N750 (U2J)	±0.25	±2	100	5.08	>13	3.9; 4.7; 10; 15; 22; 47; 100; 150; 220; 330	500	5000	683 58002
N1500 (P3K)	-	±2		5.08	>13	18; 22; 47; 68; 100; 150; 220; 330; 470; 560	500	5000	683 70002
2C2/2E1 (X5S/X7T)	-	±10		5.08	>13	180; 220; 470; 680; 1000; 1500; 2200; 3300; 4700; 5600	500	5000	630 09002
2E2 (X5U)	-	-20/+50		5.08	>13	1000; 1200; 1500; 2200; 3300; 4700; 6800; 8200; 10000; 15000	500	5000	640 09002
2F6 (Y5V)	-	-20/+80	63	5.08	>13	1000; 1500; 2200; 4700; 6800; 10000; 15000; 22000; 33000; 47000	500	5000	629 09002
NP0 precision (C0G) ⁽³⁾	±0.1	±1		5.08	>13	0.82; 1; 2.2; 4.7; 10; 15; 22; 47; 100; 150	500	5000	652 90002
P100 (M7G)	±0.25	±2		5.08	>13	0.47; 0.68; 1; 1.5; 2.2; 4.7; 10; 15; 22; 33	500	5000	652 04002
NP0 (C0G)	±0.25	±2		5.08	>13	0.82; 1; 2.2; 4.7; 10; 15; 22; 47; 100; 150	500	5000	652 10002
N150 (P2G)	±0.25	±2	500	5.08	>13	2.2; 4.7; 10; 15; 22; 47; 68; 100; 120; 150	500	5000	652 34002
N750 (U2J)	±0.25	±2	500	5.08	>13	1.8; 2.2; 4.7; 10; 15; 22; 47; 68; 100; 150	500	5000	652 58002
N1500 (P3K)	-	±2		5.08	>13	10; 15; 22; 47; 68; 100; 150; 120; 470; 560	500	5000	652 70002
2C2/2E1 (X5S/X7T)	-	±10		5.08	>13	100; 150; 220; 470; 680; 1000; 1500; 2200; 3300; 4700	500	5000	655 09002

Miniature ceramic plate capacitors

Sample kits

TC (TK) ⁽¹⁾	CAP. TOL.		U _{R(DC)} (V)	LEAD SPACING (mm)	LEAD LENGTH (mm)	CAPACITANCE VALUES ⁽²⁾ (pF)	SAMPLES PER VALUE	SAMPLES PER KIT	ORDER NUMBER (2222)
	<10 pF (pF)	≥10 pF (%)							
SL (P100 to N1500)	±0.25	±5		5.08	>13	0.47; 1; 2.2; 4.7; 10; 15; 22; 47; 68; 100	500	5000	694 09002
2C2/2E1 (X5S/X7T)	—	±10	1000	5.08	>13	100; 150; 180; 220; 330; 470; 680; 820; 1000; 1200	500	5000	693 09002
2E2 (X5U)	—	±20		5.08	>13	270; 330; 470; 680; 820; 1000; 1500; 2200; 2700; 3300	500	5000	695 09002

Notes

1. Temperature coefficient code in accordance with "RS198" is shown between parentheses.
2. Other capacitance values and tolerances are available on request. Customized sample kits are also available on request.
3. E24 series of values are available on request.

DATA HANDBOOK SYSTEM

DATA HANDBOOK SYSTEM

Philips Components data handbooks are available for selected product ranges and contain all relevant data available at the time of publication and each is revised and updated regularly.

Loose data sheets are sent to subscribers to keep them up-to-date on additions or alterations made during the lifetime of each edition.

Our data handbook titles are listed here.

Display components

Book Title

- DC01 Colour Television Tubes
- DC02 Monochrome Monitor Tubes and Deflection Units
- DC03 Television Tuners, Coaxial Aerial Input Assemblies
- DC04 Colour Monitor and Multimedia Tubes
- DC05 Wire Wound Components

Magnetic products

- MA01 Soft Ferrites
- MA03 Piezoelectric Ceramics and Specialty Ferrites
- MA04 Dry-reed Switches

Passive components

- PA01 Electrolytic Capacitors
- PA02 Varistors, Thermistors and Sensors
- PA03 Potentiometers
- PA04 Variable Capacitors
- PA05 Film Capacitors
- PA06 Ceramic Capacitors
- PA06a Surface Mounted Ceramic Multilayer Capacitors
- PA06b Leaded Ceramic Capacitors
- PA08 Fixed Resistors
- PA10 Quartz Crystals
- PA11 Quartz Oscillators

MORE INFORMATION FROM PHILIPS COMPONENTS?

For more information about Philips Components data handbooks, catalogues and subscriptions, please contact your nearest Philips Components sales organization **(see address list on the back cover of this handbook).**

OVERVIEW OF PHILIPS SEMICONDUCTORS DATA HANDBOOKS

Our sister product division, Philips Semiconductors, also has a comprehensive data handbook system to support their products. Their data handbook titles are listed here.

Integrated circuits

<i>Book</i>	<i>Title</i>
IC01	Semiconductors for Radio, Audio and CD/DVD Systems
IC02	Semiconductors for Television and Video Systems
IC03	Semiconductors for Wired Telecom Systems
IC04	HE4000B Logic Family CMOS
IC05	Advanced Low-power Schottky (ALS) Logic
IC06	High-speed CMOS Logic Family
IC11	General-purpose/Linear ICs
IC12	I ² C Peripherals
IC13	Programmable Logic Devices (PLD)
IC14	8048-based 8-bit Microcontrollers
IC15	FAST TTL Logic Series
IC16	CMOS ICs for Clocks and Watches
IC17	Semiconductors for Wireless Communications
IC18	Semiconductors for In-Car Electronics
IC19	ICs for Data Communications
IC20	80C51-based 8-bit Microcontrollers
IC22	Multimedia ICs
IC23	BiCMOS Bus Interface Logic
IC24	Low Voltage CMOS & BiCMOS Logic
IC25	16-bit 80C51XA Microcontrollers (eXtended Architecture)
IC26	IC Circuit Packages
IC27	Complex Programmable Logic Devices

Discrete semiconductors

SC01	Small-signal and Medium-power Diodes
SC02	Power Diodes
SC03	Power Thyristors and Triacs
SC04	Small-signal Transistors
SC05	Video Transistors and Modules for Monitors
SC06	High-voltage and Switching NPN Power Transistors
SC07	Small-signal Field-effect Transistors
SC13a	PowerMOS Transistors including TOPFETs and IGBTs
SC13b	Small-signal and Medium-power MOS Transistors
SC14	RF Wideband Transistors
SC16	Wideband Hybrid IC Modules
SC17	Semiconductor Sensors
SC18	Discrete Semiconductor Packages
SC19	RF & Microwave Power Transistors, RF Power Modules and Circulators/Isolators

MORE INFORMATION FROM PHILIPS SEMICONDUCTORS?

For more information contact your nearest Philips Semiconductors national organization shown in the following list.

Argentina: see South America
Australia: NORTH RYDE, Tel. +61 2 9805 4455 Fax. +61 2 9805 4466
Austria: WIEN, Tel. +43 1 60 101, Fax. +43 1 60 101 1210
Belarus: MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773
Belgium: see The Netherlands
Brazil: see South America
Bulgaria: SOFIA, Tel. +359 2 689 211, Fax. +359 2 689 102
Canada: SCARBOROUGH, Tel. +1 800 234 7381
Chile: see South America
China/Hong Kong: HONG KONG, Tel. +852 2319 7888, Fax. +852 2319 7700
Colombia: see South America
Czech Republic: see Austria
Denmark: COPENHAGEN, Tel. +45 32 88 2636, Fax. +45 31 57 0044
Finland: ESPOO, Tel. +358 9 615800, Fax. +358 9 61580920
France: SURESNES, Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427
Germany: HAMBURG, Tel. +49 40 23 53 60, Fax. +49 40 23 536 300
Greece: TAVROS/ATHENS, Tel. +30 1 4894 339/239, Fax. +30 1 4814 240
Hungary: see Austria
India: BOMBAY, Tel. +91 22 4938 541, Fax. +91 22 4938 722
Indonesia: see Singapore
Ireland: DUBLIN, Tel. +353 1 7640 000, Fax. +353 1 7640 200
Israel: TEL AVIV, Tel. +972 3 645 0444, Fax. +972 3 649 1007
Italy: MILANO, Tel. +39 2 6752 2531, Fax. +39 2 6752 2557
Japan: TOKIO, Tel. +81 3 3740 5130, Fax. +81 3 3740 5077
Korea: SEOUL, Tel. +82 2 709 1412, Fax. +82 2 709 1415
Malaysia: SELANGOR, Tel. +60 3 750 5214, Fax. +60 3 757 4880
Mexico: EL PASO, TEXAS, Tel. +9-5 800 234 7381
Middle East: see Italy
Netherlands: EINDHOVEN, Tel. +31 40 27 82785, Fax. +31 40 27 88399
New Zealand: AUCKLAND, Tel. +64 9 849 4160, Fax. +64 9 849 7811
Norway: OSLO, Tel. +47 22 74 8000, Fax. +47 22 74 8341
Philippines: MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474
Poland: WARSZAWA, Tel. +48 22 612 2831, Fax. +48 22 612 2327
Portugal: see Spain
Romania: see Italy
Russia: MOSCOW, Tel. +7 095 755 6918, Fax. +7 095 755 6919
Singapore: SINGAPORE, Tel. +65 350 2538, Fax. +65 251 6500
Slovakia: see Austria
Slovenia: see Italy
South Africa: JOHANNESBURG, Tel. +27 11 470 5911, Fax. +27 11 470 5494
South America: SÃO PAULO, Tel. +55 11 821 2333, Fax. +55 11 821 2382
Spain: BARCELONA, Tel. +34 3 301 6312, Fax. +34 3 301 4107
Sweden: STOCKHOLM, Tel. +46 8 632 2000, Fax. +46 8 632 2745
Switzerland: ZÜRICH, Tel. +41 1 488 2686, Fax. +41 1 481 7730
Taiwan: TAIPEI, Tel. +886 2 2134 2865, Fax. +886 2 2134 2874
Thailand: BANGKOK, Tel. +66 2 745 4090, Fax. +66 2 398 0793
Turkey: ISTANBUL, Tel. +90 212 279 2770, Fax. +90 212 282 6707
Ukraine: KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461
United Kingdom: HAYES, Tel. +44 181 730 5000, Fax. +44 181 754 8421
United States: SUNNYVALE, Tel. +1 800 234 7381
Uruguay: see South America
Vietnam: see Singapore
Yugoslavia: BEOGRAD, Tel. +381 11 625 344, Fax. +381 11 635 777

Internet: <http://www.semiconductors.philips.com>

For all other countries apply to:

Philips Semiconductors

International Marketing & Sales Communications, Building BE-p,
P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands,
Fax. +31-40-2724825

NOTES

STANDARD SERIES OF VALUES IN A DECADE FOR RESISTANCES AND CAPACITANCES

According to "IEC publication 63".

E192	E96	E48	E192	E96	E48	E192	E96	E48	E192	E96	E48	E24	E12	E6	E3
100	100	100	178	178	178	316	316	316	562	562	562	10	10	10	10
101			180			320			569			11			
102	102		182	182		324	324		576	576		12	12		
104			184			328			583			13			
105	105	105	187	187	187	332	332	332	590	590	590	15	15	15	
106			189			336			597			16			
107	107		191	191		340	340		604	604		18	18		
109			193			344			612			20			
110	110	110	196	196	196	348	348	348	619	619	619	22	22	22	22
111			198			352			626			24			
113	113		200	200		357	357		634	634		27	27		
114			203			361			642			30			
115	115	115	205	205	205	365	365	365	649	649	649	33	33	33	
117			208			370			657			36			
118	118		210	210		374	374		665	665		39	39		
120			213			379			673			43			
121	121	121	215	215	215	383	383	383	681	681	681	47	47	47	47
123			218			388			690			51			
124	124		221	221		392	392		698	698		56	56		
126			223			397			706			62			
127	127	127	226	226	226	402	402	402	715	715	715	68	68	68	
129			229			407			723			75			
130	130		232	232		412	412		732	732		82	82		
132			234			417			741			91			
133	133	133	237	237	237	422	422	422	750	750	750				
135			240			427			759						
137	137		243	243		432	432		768	768					
138			246			437			777						
140	140	140	249	249	249	442	442	442	787	787	787				
142			252			448			796						
143	143		255	255		453	453		806	806					
145			258			459			816						
147	147	147	261	261	261	464	464	464	825	825	825				
149			264			470			835						
150	150		267	267		475	475		845	845					
152			271			481			856						
154	154	154	274	274	274	487	487	487	866	866	866				
156			277			493			876						
158	158		280	280		499	499		887	887					
160			284			505			898						
162	162	162	287	287	287	511	511	511	909	909	909				
164			291			517			920						
165	165		294	294		523	523		931	931					
167			298			530			942						
169	169	169	301	301	301	536	536	536	953	953	953				
172			305			542			965						
174	174		309	309		549	549		976	976					
176			312			556			988						

Philips Components – a worldwide company

Australia: Philips Components Pty Ltd, NORTH RYDE,
Tel. (02) 9805 4455, Fax. (02) 9805 4466.

Austria: Österreichische Philips Industrie GmbH, WIEN,
Tel. (01) 601 01 12 41, Fax. (01) 60 101 12 11.

Belarus: Philips Office Belarus, MINSK,
Tel. (5172) 200 924/733, Fax. (5172) 200 773.

Benelux: Philips Nederland B.V., EINDHOVEN, NL.,
Tel. (+31 40) 2783 749, Fax. (+31 40) 2788 399.

Brazil: Philips Components, SÃO PAULO,
Tel. (011) 821 2333, Fax. (011) 829 1849.

Canada: Philips Electronics Ltd., SCARBOROUGH,
Tel. (0416) 292 5161, Fax. (0416) 754 6248.

China: Philips Company, SHANGHAI,
Tel. (021) 6354 1088, Fax. (021) 6354 1060.

Denmark: Philips Components A/S, COPENHAGEN S,
Tel. (32) 883 339, Fax. (31) 571 949.

Finland: Philips Components, ESPOO,
Tel. (0) 9 615 800, Fax. (0) 9 615 80510.

France: Philips Composants, SURESNES,
Tel. (01) 4099 6161, Fax. (01) 4099 6493.

Germany: Philips Components GmbH, HAMBURG,
Tel. (040) 2489-0, Fax. (040) 2489 1400.

Greece: Philips Hellas S.A., TAVROS,
Tel. (01) 4894 339/(01) 4894 239, Fax. (01) 4814 240.

Hong Kong: Philips Hong Kong, KOWLOON,
Tel. 2784 3000, Fax. 2784 3003.

India: Philips India Ltd., MUMBAI,
Tel. (022) 4930 311, Fax. (022) 4930 966/4950 304.

Indonesia: P.T. Philips Development Corp., JAKARTA,
Tel. (021) 794 0040, Fax. (021) 794 0080.

Ireland: Philips Electronics (Ireland) Ltd., DUBLIN,
Tel. (01) 76 40 203, Fax. (01) 76 40 210.

Israel: Rapac Electronics Ltd., TEL AVIV,
Tel. (03) 6450 444, Fax. (03) 6491 007.

Italy: Philips Components S.r.l., MILANO,
Tel. (02) 6752 2531, Fax. (02) 6752 2557.

Japan: Philips Japan Ltd., TOKYO,
Tel. (0) 3 3740 5135, Fax. (0) 3 3740 5035.

Korea (Republic of): Philips Electronics (Korea) Ltd., SEOUL,
Tel. (02) 709 -1472, Fax. (02) 709 1480.

Malaysia: Philips Malaysia SDN Berhad
Components Division, PULAU PINANG,
Tel. (03) 750 5213, Fax. (03) 757 4880.

Mexico: Philips Components, EL PASO, U.S.A.,
Tel. (915) 772 4020, Fax. (915) 772 4332.

New Zealand: Philips New Zealand Ltd., AUCKLAND,
Tel. (09) 815 4000, Fax. (09) 849 7811.

Norway: Norsk A/S Philips, OSLO,
Tel. (22) 74 8000, Fax. (22) 74 8341.

Pakistan: Philips Electrical Industries of Pakistan Ltd., KARACHI,
Tel. (021) 587 4641-49, Fax. (021) 577 035/587 4546.

Philippines: Philips Semiconductors Philippines Inc.,
METRO MANILA, Tel. (02) 816 6345, Fax. (02) 817 3474.

Poland: Philips Poland Sp. z.o.o., WARSZAWA,
Tel. (022) 612 2594, Fax. (022) 612 2327.

Portugal: Philips Portuguesa S.A.,
Philips Components: LINDA-A-VELHA,
Tel. (01) 416 3160/416 3333, Fax. (01) 416 3174/416 3366.

Russia: Philips Russia, MOSCOW,
Tel. (095) 755 6918, Fax. (095) 755 6919.

Singapore: Philips Singapore Pte Ltd., SINGAPORE,
Tel. 350 2000, Fax. 355 1758.

South Africa: S.A. Philips Pty Ltd., JOHANNESBURG,
Tel. (011) 470 5911, Fax. (011) 470 5494.

Spain: Philips Components, BARCELONA,
Tel. (93) 301 63 12, Fax. (93) 301 42 43.

Sweden: Philips Components AB, STOCKHOLM,
Tel. (+46) 8 632 2000, Fax. (+46) 8 632 2745.

Switzerland: Philips Components AG, ZÜRICH,
Tel. (01) 488 22 11, Fax. (01) 481 77 30.

Taiwan: Philips Taiwan Ltd., TAIPEI,
Tel. (02) 2134 2900, Fax. (02) 2134 2929.

Thailand: Philips Electronics (Thailand) Ltd., BANGKOK,
Tel. (02) 745 4090, Fax. (02) 398 0793.

Turkey: Türk Philips Ticaret A.S., GÜLTEPE/İSTANBUL,
Tel. (0212) 279 2770, Fax. (0212) 282 6707.

United Kingdom: Philips Components Ltd., DORKING,
Tel. (01306) 512 000, Fax. (01306) 512 345.

United States:

- Display and Wire Wound Components, ANN ARBOR, MI,
Tel. (313) 996 9400, Fax. (313) 761 2776.
- Magnetic Products, SAUGERTIES, NY,
Tel. (914) 246 2811, Fax. (914) 246 0487.
- Passive Components, SAN JOSE, CA,
Tel. (408) 570 5600, Fax. (408) 570 5700.

Yugoslavia (Federal Republic of): Philips Components, BELGRADE,
Tel. (0) 11 625 344/373, Fax. (0) 11 635 777.

For all other countries apply to: Philips Components,
Marketing Communications, P.O. Box 218, 5600 MD EINDHOVEN,
The Netherlands, Fax. +31-40-2724 547.

COD15

© Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

533110/20000/01/pp256
Document order number:

Date of release: December 1997
9398 184 16011



PHILIPS

Let's make things better.