

PHILIPS

Data handbook



Electronic
components
and materials

Components and materials

Part 14

May 1982

Electrolytic and solid capacitors

COMPONENTS AND MATERIALS

PART 14 - MAY 1982

ELECTROLYTIC AND SOLID CAPACITORS

GENERAL

ALUMINIUM ELECTROLYTIC CAPACITORS

SOLID ALUMINIUM CAPACITORS

SOLID TANTALUM CAPACITORS

MAINTENANCE TYPES

DATA HANDBOOK SYSTEM

Our Data Handbook System is a comprehensive source of information on electronic components, sub-assemblies and materials; it is made up of four series of handbooks each comprising several parts.

ELECTRON TUBES

BLUE

SEMICONDUCTORS

RED

INTEGRATED CIRCUITS

PURPLE

COMPONENTS AND MATERIALS

GREEN

The several parts contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

Where ratings or specifications differ from those published in the preceding edition they are pointed out by arrows. Where application information is given it is advisory and does not form part of the product specification.

If you need confirmation that the published data about any of our products are the latest available, please contact our representative. He is at your service and will be glad to answer your inquiries.

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part without the written consent of the publisher.

ELECTRON TUBES (BLUE SERIES)

The blue series of data handbooks is comprised of the following parts:

- T1 Tubes for r.f. heating**
- T2 Transmitting tubes for communications**
- T3 Klystrons, travelling-wave tubes, microwave diodes**
- ET3 Special Quality tubes, miscellaneous devices (will not be reprinted)**
- T4 Magnetrons**
- T5 Cathode-ray tubes**
Instrument tubes, monitor and display tubes, C.R. tubes for special applications
- T6 Geiger-Müller tubes**
- T7 Gas-filled tubes**
Segment indicator tubes, indicator tubes, dry reed contact units, thyratrons, industrial rectifying tubes, ignitrons, high-voltage rectifying tubes, associated accessories
- T8 Picture tubes and components**
Colour TV picture tubes, black and white TV picture tubes, colour monitor tubes for data graphic display, monochrome monitor tubes for data graphic display, components for colour television, components for black and white television and monochrome data graphic display
- T9 Photo and electron multipliers**
Photomultiplier tubes, phototubes, single channel electron multipliers, channel electron multiplier plates
- T10 Camera tubes and accessories, image intensifiers**
- T11* Microwave components and assemblies**

* Will become available in the course of 1982.

SEMICONDUCTORS (RED SERIES)

The red series of data handbooks is comprised of the following parts:

- S1 Diodes**
Small-signal germanium diodes, small-signal silicon diodes, voltage regulator diodes (< 1,5 W), voltage reference diodes, tuner diodes, rectifier diodes
- S2 Power diodes, thyristors, triacs**
Rectifier diodes, voltage regulator diodes (> 1,5 W), rectifier stacks, thyristors, triacs
- S3 Small-signal transistors**
- S4 Low-frequency power transistors and hybrid IC modules**
- S5 Field-effect transistors**
- S6 R.F. power transistors and modules**
- S7 Microminiature semiconductors for hybrid circuits**
- S8 Devices for optoelectronics**
Photosensitive diodes and transistors, light-emitting diodes, displays, photocouplers, infrared sensitive devices, photoconductive devices.
- S9 Taken into handbook T11 of the blue series**
- S10 Wideband transistors and wideband hybrid IC modules**

INTEGRATED CIRCUITS (PURPLE SERIES)

The purple series of data handbooks is comprised of the following parts:

- IC1** Bipolar ICs for radio and audio equipment
- IC2** Bipolar ICs for video equipment
- IC3*** Digital ICs for radio, audio and video equipment
- IC4** Digital integrated circuits
LOCMOS HE4000B family
- IC5** Digital integrated circuits – ECL
ECL10 000 (GX family), ECL100 000 (HX family), dedicated designs
- IC6*** Professional analogue integrated circuits
- IC7** Signetics bipolar memories
- IC8** Signetics analogue circuits
- IC9*** Signetics TTL circuits

* These handbooks will be available in the course of 1982.

COMPONENTS AND MATERIALS (GREEN SERIES)

The green series of data handbooks is comprised of the following parts:

- C1 Assemblies for industrial use**
PLC modules, PC20 modules, HN1L FZ/30 series, NORbits 60-, 61-, 90-series, input devices, hybrid ICs, peripheral devices
- C2 FM tuners, television tuners, video modulators, surface acoustic wave filters**
- C3 Loudspeakers**
- C4 Ferroxcube potcores, square cores and cross cores**
- C5 Ferroxcube for power, audio/video and accelerators**
- C6 Electric motors and accessories**
Permanent magnet synchronous motors, stepping motors, direct current motors
- CM7a Assemblies (will not be reprinted)**
Circuit blocks 40-series and CSA70(L), counter modules 50-series, input/output devices
- C8 Variable mains transformers**
- C9 Piezoelectric quartz devices**
Quartz crystal units, temperature compensated crystal oscillators, compact integrated oscillators, quartz crystal cuts for temperature measurements
- C10 Connectors**
- C11 Non-linear resistors**
Voltage dependent resistors (VDR), light dependent resistors (LDR), negative temperature coefficient thermistors (NTC), positive temperature coefficient thermistors (PTC)
- C12 Variable resistors and test switches**
- C13 Fixed resistors**
- C14 Electrolytic and solid capacitors**
- C15 Film capacitors, ceramic capacitors, variable capacitors**
- C16 Piezoelectric ceramics, permanent magnet materials**








GENERAL

ELECTROLYTIC AND SOLID CAPACITORS


SURVEY

ALUMINIUM ELECTROLYTIC CAPACITORS

type	series number 2222 ...	application	nominal capacitance μF	rated voltage (U_R) V	page
Miniature/small					
	030				
	031				
	032				
	033	long-life, general, industrial	0,33 to 15 000	6,3 to 100	33*
	041				
	042				
	043		1 to 220	160 to 385	109*
Small					
	021 **	long-life general, industrial	220 to 15 000	10 to 63	23
Miniature/small					
	035	general	0,22 to 4700	6,3 to 100	77
Miniature					
	036	general, industrial	0,22 to 330	6,3 to 63	89
Small					
	108	extra long-life, industrial	2,2 to 2200	6,3 to 63	153
Small; bipolar					
	039	long-life, general, industrial	1 to 47	U_R (a.c.) = 63 V _P U_R (d.c.) = 63 V	101

* See also Selection Chart, page 31.

** Development Sample Data; very high CU-product per unit volume.

type	series number	application	nominal capacitance μF	rated voltage (U_R) V	page
Large		050 052	long-life industrial	47 to 68 000 10 to 385	129
Large		114 115	long-life industrial military	150 to 220 000 10 to 385	165
Maintenance types	015 016	long-life, general, industrial	0,47 to 680	4 to 100	277
	071 073	long-life, industrial	680 to 33 000	6,3 to 63	291
	106 107	long-life, military	1500 to 150 000	6,3 to 100	309



SOLID ALUMINIUM CAPACITORS

Miniature; resin dipped			122	long-life, general, industrial	0,1 to 68	6,3 to 40	211
Small			123	extra long-life, military, industrial	2,2 to 1000	6,3 to 40	225

CECC approval pending

Small			121	long-life, military, industrial	2,2 to 330	6,3 to 50	191
-------	--	---	-----	---------------------------------------	------------	-----------	-----

SOLID TANTALUM CAPACITORS

Hermetic seal; to MIL-C-39003/01		141	polarized or d.c. biased circuits	0,1 to 330	6 to 75	235
Hermetic seal		143	polarized or d.c. biased circuits	0,1 to 330	6 to 50	255

INTRODUCTION

1. INTRODUCTION

Electrolytic and solid capacitors are most commonly used in such circuit functions as filtering, coupling, smoothing and by-passing, and for energy storage, or wherever there is a need for capacitive reactance.

These functions are often applied under specific circumstances and the requirements specified by users have grown steadily. The outcome has been a wide range of electrolytic and solid capacitor programmes to cover the different applications, for example:

General purpose	radio, television, and general/industrial applications.
Professional/industrial	long life and high reliability – telecommunications equipment, electronic data processing. high temperature – motor cars. small size – hybrid circuits, paging systems. low equivalent series resistance at high frequency – switched-mode power supplies.

2. PRINCIPLES

The essential property of a capacitor is to store electrical charge. The amount of electrical charge (Q) in the capacitor (C) is proportional to the applied voltage (U). The relationship of these parameters is:

$$Q = C \cdot U$$

where Q = charge in coulombs (C)

C = capacitance in farads (F)

U = voltage in volts (V)

The value of capacitance is directly proportional to the (anode) surface area and inversely proportional to the thickness of the dielectric layer, thus:

$$C = \epsilon_r \cdot \epsilon_0 \cdot \frac{A}{d},$$

where ϵ_0 = absolute permittivity (8.85×10^{-12} F/m)

ϵ_r = relative dielectric constant (dimensionless)

A = surface area (m^2)

d = thickness of dielectric (oxide) layer (m)

The dielectric layer consists of either aluminium oxide (Al_2O_3) or tantalum oxide (Ta_2O_5) which are formed by an electrochemical oxidizing process from the respective metals. These layers withstand extremely high electrical field strength. During the electrochemical forming process the dielectric layer is exposed to the physical limit of electrical field strength mentioned above. So the thickness of the layer is determined by a voltage U_F , the so-called forming voltage. To avoid changing the thickness of the layer during normal use the operating voltage should always be lower than the forming voltage.

For general purpose electrolytic capacitors the value of U_R/U_F is about 0,8 (U_R being the rated voltage). Types for professional and industrial applications are sometimes rated to 0,6. Solid capacitors are rated to approx. 0,25 due to various reasons.

ELECTROLYTIC AND SOLID CAPACITORS

Table 1

material	relative dielectric constant (dimensionless)	physical limit of electrical field strength (V/m)
Al ₂ O ₃	8	7. 10 ⁸
Ta ₂ O ₅	24	5. 10 ⁸

3. DESCRIPTION

The above-mentioned dielectric layer is electrically contacted on one side by its base metal (aluminium or tantalum) and on the other side by a conductor, being an electrolyte in the case of an electrolytic capacitor and a solid semiconductor in the case of a solid capacitor. The metal contact electrode is called the anode. To obtain high capacitance values per unit volume the surface of the anode is artificially enlarged by etching (Al) or sintering (Ta) processes.

Aluminium electrolytic capacitors

The containing electrode opposite to the anode is an ionic conductor in the case of an electrolytic capacitor. Because of this ionic conduction the potential of the anode should never be lower than the potential of the electrolyte: if the potential of the anode is lower than that of the electrolyte, positive hydrogen ions will move through the dielectric layer to the anode metal where they are discharged.

The hydrogen gas so formed blows up the dielectric layer, causing a high leakage current or even a short circuit. In the case of the anode being at a positive potential with respect to the electrolyte (this is the case of normal use) the oxidizing ions are driven towards the dielectric layer.

These oxidizing ions are not able to pass through the dielectric layer at field strengths lower than the physical limit mentioned in Table 1. In the case of a defect in the dielectric layer the limiting field strength might be reached even during normal use. In that case the oxidizing ions will pass through the defect to the anode metal where new oxide is formed, which repairs the defect.

It is necessary to make electrical contact to the electrolyte from outside. This is usually done by inserting an etched aluminium electrode into the electrolyte. This electrode, called the cathode, is always covered by a relatively thin oxide layer. To avoid direct mechanical contact between the oxide layers of cathode and anode (which would cause mechanical damage of the dielectric) a soft spacer of porous paper is used which also serves as a sponge for the electrolyte.

The total thickness of the system described is only a fraction of a millimetre. Therefore, during manufacture, long strips of the described system are wound into cylindrical bodies and encased. Figure 1 shows a cross-section of a typical design.


Solid capacitors (Al + Ta)

In a solid capacitor the contacting electrode opposite to the anode is formed by manganese dioxide (MnO_2), a semiconductor, and called the cathode. Therefore, in principle, the potential of the anode with respect to the cathode is allowed to be positive as well as negative. However, due to the absence of oxidizing ions, no self-repairing effect of the dielectric layer by the leakage current is obtained. In practice it is advisable to maintain the anode potential positive with respect to the cathode, because no solid capacitor is absolutely free of moisture, so ionic reactions could take place.

Via the system manganese dioxide — aluminium foil — case — tinned leads, the cathode is electrically connected with the outside in our 121 and 123 series of solid aluminium capacitors (Fig. 1). A glass fibre spacer is used to avoid direct mechanical contact between anode layer and the aluminium contact foil.

In the 122 series of solid aluminium capacitors the cathode is connected to the outside via the system manganese dioxide — graphite — silver — tin solder — tinned leads (Fig. 2).

ALUMINIUM ELECTROLYTIC TYPES

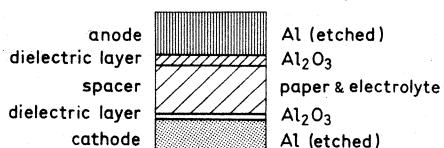

SOLID ALUMINIUM TYPES (121/123 types)

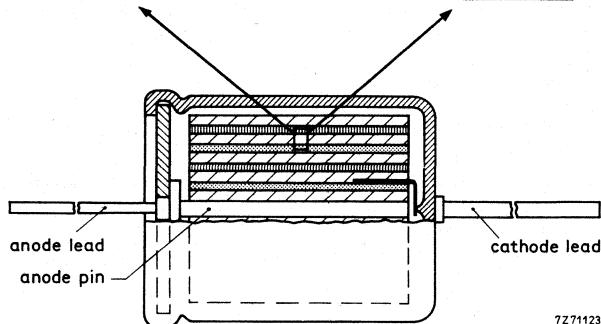
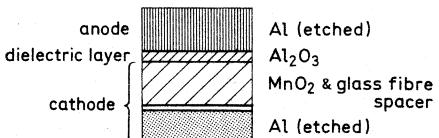


Fig. 1.

811216-13-01

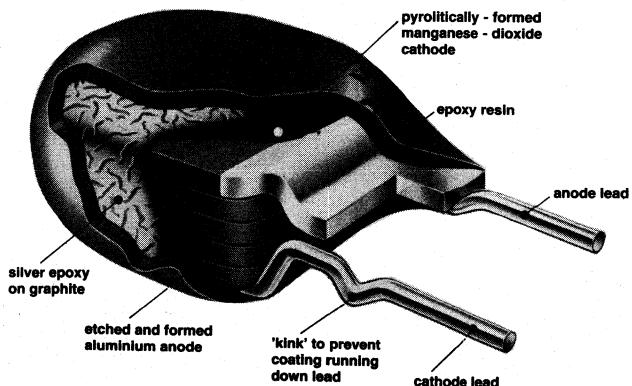


Fig. 2 Solid aluminium type 2222 122.

ELECTROLYTIC AND SOLID CAPACITORS

4. THE ELECTRICAL IMPEDANCE Z OF THE CAPACITOR

The electrical impedance Z of a capacitor in its reference plane (being the connecting points on a printed-wiring board) consists of a real part R , and an imaginary part $j \cdot X$, thus:

$$Z = R + j \cdot X \text{ and } \tan \delta = \frac{R}{X}$$

where R = the equivalent series resistance (ESR) (Ω)

$j \cdot X$ = the imaginary part of the series impedance (Ω)

Z = the complex series impedance (Ω)

$\tan \delta$ = dissipation factor (dimensionless)

The actual values of R and X depend upon two parameters: the frequency f and the temperature T . It is usual to express X in terms of C_s (equivalent series capacitance) and ω :

$$X = -\frac{1}{\omega C_s} \quad \omega = 2 \cdot \pi \cdot f, f \text{ in (Hz)}$$

At high frequencies (> 100 kHz) an inductive part contributes to the impedance, changing X into $X = j\omega L$, where L = inductance in H.

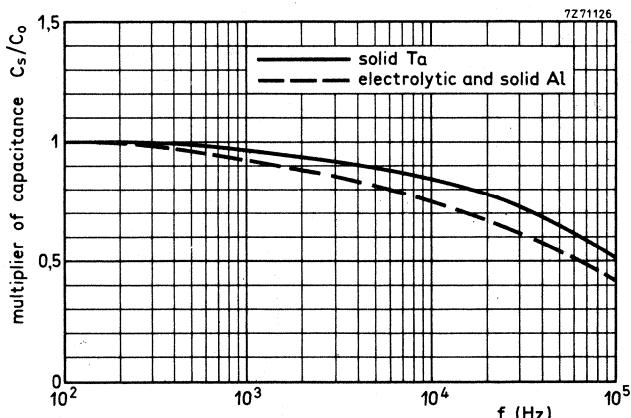


Fig. 3 Typical capacitance as a function of frequency. C_0 = capacitance at 25°C , 100 Hz.

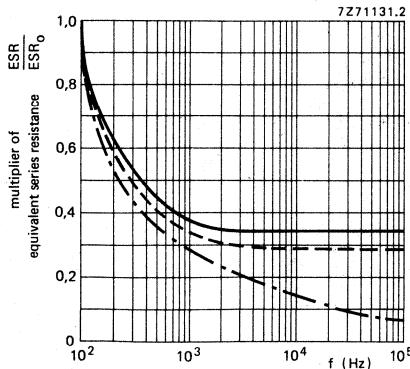


Fig. 4 Typical ESR as a function of frequency;
 ESR_0 = ESR at 25°C , 100 Hz.

— Solid tantalum capacitors;
- - - Aluminium electrolytic capacitors;
- · - · Solid aluminium capacitors.

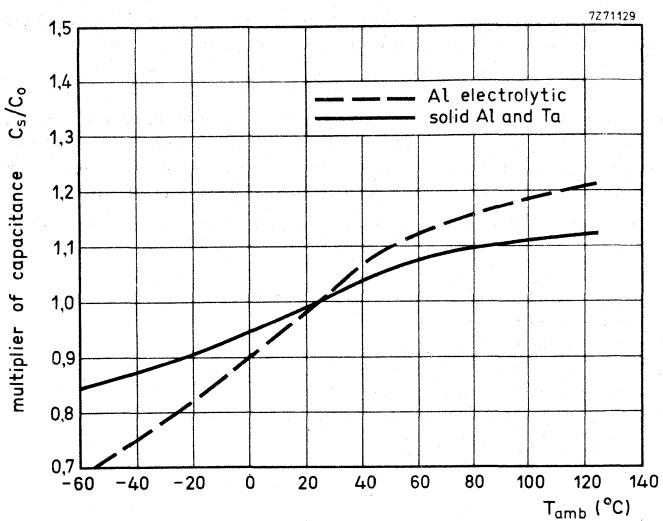


Fig. 5 Typical capacitance as a function of ambient temperature; C_0 = capacitance at 25°C , 100 Hz.

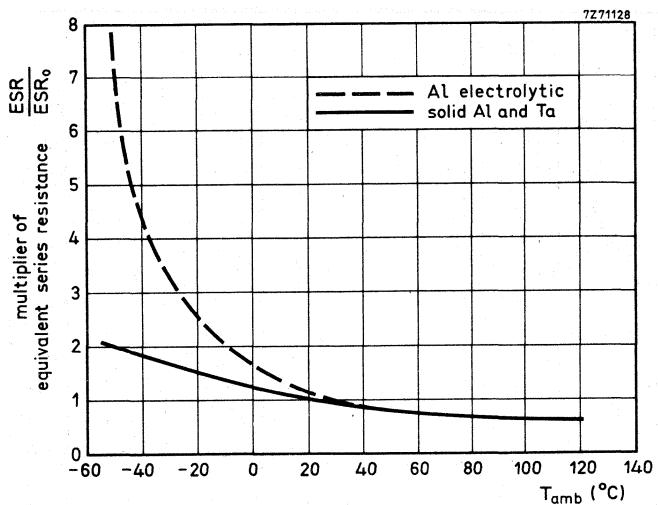


Fig. 6 Typical ESR as a function of ambient temperature. ESR_0 = ESR at 100 Hz, at 25°C .

ELECTROLYTIC AND SOLID CAPACITORS

5. RIPPLE CURRENT

In various applications a considerable amount of ripple current (I_r) passes through the capacitor. Due to the equivalent series resistance (R) power (P) is dissipated in the device:

$$P \text{ (watt)} = I_r^2 \cdot R$$

The power causes an increase in temperature of the capacitor. Temperature equilibrium is reached when the power (P) passes through the case surface into the ambient. From this it is clear, that the maximum permissible ripple current depends on the maximum permissible temperature of the capacitor, value of the equivalent series resistance, case size and ambient temperature (T_{amb}).

In the data sheets the maximum permissible ripple current is specified under certain conditions.

$$I_r = \sqrt{\frac{P}{R}} = \sqrt{\frac{\alpha \cdot S (T_c - T_{amb})}{R}}$$

where I_r = ripple current (A)
 R = equivalent series resistance (Ω)
 P = heat dissipation (W)
 α = heat transfer coefficient ($W/m^2 \text{ } ^\circ\text{C}$)
 S = heat transfer surface area (m^2)
 T_c = temperature of case surface ($^\circ\text{C}$)
 T_{amb} = ambient temperature ($^\circ\text{C}$)

6. LEAKAGE CURRENT

In normal use a small amount of direct current passes through the capacitor. This current is called the leakage current (I_l) and depends on the applied voltage and temperature. The dependency of I_l/I_0 (I_0 being the leakage current at voltage U_R and 25°C) on temperature, is shown in Fig. 7 for an aluminium electrolytic capacitor and a solid aluminium capacitor.

The dependency of I_l/I_0 as a function of U/U_R is given in Fig. 8 for an aluminium electrolytic capacitor and a solid aluminium capacitor, U being the working voltage.

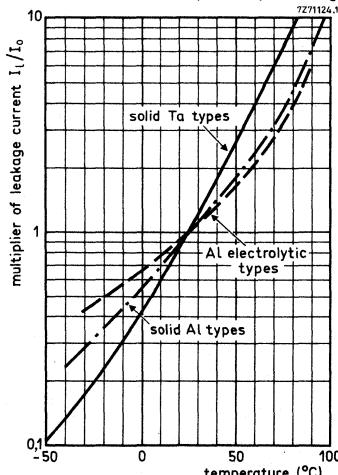


Fig. 7 Typical leakage current as a function of temperature. I_0 = leakage current during continuous operation at $T_{amb} = 25^\circ\text{C}$.

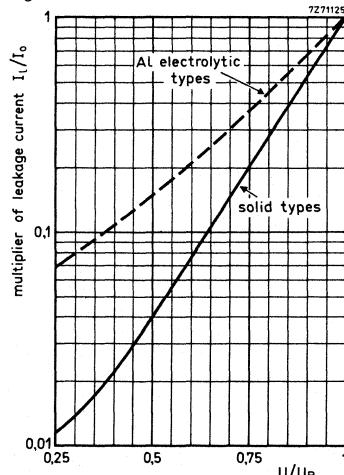


Fig. 8 Typical leakage current as a function of U/U_R . I_0 = leakage current at U_R at a discrete constant temperature within category temperature range, U is working voltage.

7. LIFE TIME

Aluminium electrolytic capacitors

The phenomena which determine the life time of an aluminium electrolytic capacitor are, among others, changes of the following parameters exceeding the specified limits:

- capacitance
- dissipation factor
- impedance
- leakage current

Most of them are directly or indirectly caused by a failure mechanism occurring in the electrolyte (drying out, chemical reactions).

Two types of electrolyte can be distinguished:

- a. Glycol-electrolyte which is somewhat aggressive to the dielectric layer at higher temperatures. This liquid has a relatively high specific resistance and high temperature coefficient.
- b. modern electrolytes (based upon DiMethyl Acetamide) require very good sealing (due to high diffusiveness of the volatile solvent). This liquid has a relatively low specific resistance and a low temperature coefficient, and can generally be used over a wider temperature range than the glycol type of electrolyte.

In general the life time of an aluminium electrolytic capacitor can be increased by a factor of 2 when the temperature is dropped by 10 °C.

By using the capacitor at a voltage lower than the rated voltage, the leakage current decreases, which means that the process of forming hydrogen gas at the cathode takes place at a lower rate. This also improves the life time of the capacitor.

The typical life time at U_R , as given in the data sheets, is the time during which the number of inoperatives is $\leq 1\%$.

Criteria for an inoperative are: $\Delta C/C \geq 50\%$;

impedance $\geq 3 \times$ stated limit;

$\tan \delta$ (and ESR) $\geq 3 \times$ stated limit;

leakage current $\geq 3 \times$ stated limit.

Solid aluminium capacitors

The end of life is determined by gradual degradation of the dielectric oxide layer, resulting in increase of leakage current. The life time can be increased by derating the voltage and, to a less extent, the temperature.

Due to the fact that no electrolyte is used in solid aluminium capacitors the associated failure mechanisms do not occur.

Solid tantalum capacitors

The end of life of solid tantalum capacitors is determined by sudden breakdown failures; sometimes in an early stage of its service life, especially in dynamic applications, e.g. charge and a.c. applications.

An explanation of this lies in the forming of crystalline tantalum oxide beneath the existing amorphous tantalum oxide under conditions of high field strength and high temperature. The growth of this crystalline tantalum oxide eventually breaks through the amorphous oxide layer and, because the newly-formed oxide has a very low specific resistance, a current flow is originated which results in a short-circuit.

The life time of a solid tantalum capacitor can be improved by derating the voltage and ambient temperature.

ELECTROLYTIC AND SOLID CAPACITORS

8. RELIABILITY

In life testing, reliability can be determined by means of a failure rate (F.R.), which is expressed as:

$$\text{Failure rate (F.R.)} = \frac{\text{number of failures during test}}{\text{number of components tested} \times \text{test duration}}$$

Two types of failures can be found:

- catastrophic failures: short circuits, open circuits.
- degradation failures: parameter drifts outside the specification limits.

With aluminium electrolytic capacitors degradation failures mostly occur, due to factors like:

- aggressiveness of the electrolyte.
- diffusion of the electrolyte.
- material impurities and other accidents of production.

The failure rate of solid aluminium and tantalum capacitors is determined by short circuits or open circuits, due to breakdown of the dielectric layer. The electron current does not constitute a repair action in this oxide layer.

The failure rate in solid tantalum capacitors is mostly influenced by a field-crystallization process, described in above. In this case the F.R. can be improved by lowering the temperature and applied voltage or placing a series resistor in the circuitry.

The phenomenon of the formation of a low resistance aluminium oxide does not exist in solid aluminium capacitors, therefore they have greater reliability than solid tantalum types. Under the most severe conditions (maximum category temperature, rated voltage), the catastrophic failure rates (with a 60% confidence level) are:

- electrolytic capacitors $10^{-6}/\text{h}$
- solid aluminium capacitors $10^{-7}/\text{h}$
- solid tantalum capacitors $10^{-5}/\text{h}$

Analysis of failure in the field (under normal operating conditions) shows a far better F.R.: $\approx 10^{-9}/\text{h}$ for solid aluminium capacitors.

9. TESTS AND REQUIREMENTS

The description of tests and requirements, given in the following tables, is valid for the complete range of aluminium electrolytic capacitors and solid aluminium capacitors. Specific tests for a certain type of capacitor are not included in these tables; those tests are given in the data sheet of the relevant type.

Aluminium electrolytic capacitors

In the description of the procedure and the requirements of the tests, in some case distinction has to be made for the different types of aluminium electrolytic capacitors with respect to their size or with respect to their application fields. In the table this distinction is indicated in the columns 'type' with the indication for size:

m for miniature types,
s for small types,

l for large types,
lt for large types with screw terminals,

or with the indication for application fields:

- 1 for long-life grade types,
- 2 for general-purpose grade types.

If no indication is given in these columns, reference is made to all types.

IEC 384-4		IEC 68-2 test method	name of test	procedure (quick reference)		requirements	
sub clause				type	description	type	description
-	Ua		Tensile strength of terminations	m s	Loading force 10 N for 10 s. Loading force 20 N for 10 s.	m s	No visible damage.
-	Ub		Bending of terminations	m s	Loading force 5 N, two consecutive bends.	m s	No visible damage.
-	Uc		Torsion of terminations	m s	Two successive rotations of 180° in opposite direction, 5 s per rotation.	m s	No visible damage.
-	Ud		Torque on nut (stud)	lt	Torque of 1,76 Nm gradually applied.	lt	No visible damage.
9.8.2		Tb (method 1A)	Resistance to soldering heat	m s	Solder bath: 260 °C, 10 s, for capacitors with printed-wiring pins.	m	No visible damage, marking legible, $\Delta C/C \leq 5\%$.
9.8.1		Tb (method 1B)		l	Solder bath 350 °C, 3,5 s for capacitors with solder leads or tags.	l	
9.8.1		Ta	Solderability	m s	Solder bath: 235 °C, 2 s for capacitors with printed-wiring pins, 270 °C, 2 s for capacitors with solder leads or tags, immersed up to 2 mm from the body.	m s	No visible damage, marking legible, good thinning.

ELECTROLYTIC AND SOLID CAPACITORS

IEC 384-4 sub clause	IEC 68-2 test method	name of test	procedure (quick reference)		requirements	
			type	description	type	description
9.9	Na	Rapid change of temperature		5 cycles of 3 h at upper and lower category temperature.		No visible damage, no leakage of electrolyte.
9.10	Fc	Vibration	1	10 to 500 Hz, 0,75 mm or 10g (whichever is less), 2 directions, 3 h per direction.		No visible damage, no leakage of electrolyte, marking legible; $\Delta C/C \leq 5\%$ with respect to initial measurement.
			2	10 to 55 Hz, 0,75 mm or 10g (whichever is less), 2 directions, 3 h per direction.		No visible damage, no leakage of electrolyte, $\Delta C/C \leq 5\%$ with respect to initial measurement.
9.11	EB	Bump	1	40g, 2 directions, 4000 bumps total.		No visible damage, no leakage of electrolyte, $\Delta C/C \leq 5\%$ with respect to initial measurement.
			2	40g, 2 directions, 1000 bumps total.		No visible damage, no leakage of electrolyte.
	Ba	Dry heat		16 h at upper category temperature, no voltage applied.		No visible damage, no leakage of electrolyte.
D	Damp heat, cyclic			1 cycle of 24 h at 55 ± 2 °C, R.H. 95 to 100%, no voltage applied.		
Aa	Cold			2 h at lower category temperature, no voltage applied.		No visible damage, no leakage of electrolyte.
M	Low air pressure			5 min. at 15 to 35 °C, at atmospheric pressure of 85 mbar, last minute U _R applied.		No visible damage, no evidence of breakdown or flashover.
D	Damp heat, cyclic			5 cycles of 24 h at 55 ± 2 °C, R.H. 95 to 100%, no voltage applied.		
Qc	Sealing			1 min. in water at upper category temperature + 5 °C.		No continuous chain of bubbles.
9.12.2				Final measurement		No visible damage, no leakage of electrolyte, marking legible; leakage current \leq stated limit; $\tan \delta \leq 1,2 \times$ stated limit; $\Delta C/C \leq 10\%$.

IEC 384-4	IEC 68-2 test method	name of test	procedure (quick reference)		requirements	
sub clause			type	description	type	description
9.13	Ca	Damp heat, steady state		56 days at 40 °C, R.H. 90 to 95%; no voltage applied.		No visible damage, no leakage of electrolyte, marking legible; leakage current ≤ stated limit, $\tan \delta \leq 1.2 \times$ stated limit, insulation resistance > 100 MΩ, no breakdown or flashover below 1000 V.
					1	$\Delta C/C \leq 10\%$.
9.14	—	Endurance	1	2000 h** at upper category temperature, U_R applied.		No visible damage, no leakage of electrolyte, marking legible; leakage current ≤ stated limit, insulation resistance > 100 MΩ, no breakdown or flashover below 1000 V.
					1	$\Delta C/C \leq 15\%$ and $\leq -30\%$ for $U_R \leq 6.3\text{ V}$, $\Delta C/C \leq 15\%$ for $6.3\text{ V} < U_R \leq 160\text{ V}$, $\Delta C/C \leq 10\%$ for $U_R > 160\text{ V}$; $\tan \delta \leq 1.3 \times$ stated limit, impedance at 1 kHz or 10 kHz $\leq 2 \times$ stated limit.*
9.15	—	Surge	2	1000 h at upper category temperature, U_R applied.		$\Delta C/C \leq 25\%$ and $\leq -40\%$ for $U_R \leq 6.3\text{ V}$, $\Delta C/C \leq 30\%$ for $6.3\text{ V} < U_R \leq 160\text{ V}$, $\Delta C/C \leq 15\%$ for $U_R > 160\text{ V}$; $\tan \delta \leq 1.5 \times$ stated limit or min. 0.40 (whichever is greater), impedance at 1 kHz or 10 kHz $\leq 3 \times$ stated limit.*
					2	No visible damage, no leakage of electrolyte, leakage current ≤ stated limit, $\tan \delta \leq$ stated limit, $\Delta C/C \leq 15\%$.

* If stated in the detail specification.
 ** Capacitors 2222 032, 033, 039, 042, 043, 114, 115 are specified at 5000 h; requirements are as stated under type 1.

ELECTROLYTIC AND SOLID CAPACITORS

IEC 384-4 sub clause	IEC 68-2 test method	name of test	procedure (quick reference)		type	description	requirements
			type	description			
9.16	—	Reverse voltage	1 V in reverse polarity followed by U_R in forward polarity, both for 125 h at upper category temperature.			Leakage current \leq stated limit, $\tan \delta \leq$ stated limit, $\Delta C/C \leq 10\%$.	
9.17	—	Pressure relief	I D.C. voltage applied in reverse direction producing a current of 1 to 10 A. It	I It	I It	Pressure relief opens prior to danger of explosion or fire.	
9.18	Ha	Storage at upper category temperature	96 ± 4 h at upper category temperature.			No visible damage; no leakage of electrolyte; leakage current $\leq 2 \times$ stated limit, $\tan \delta \leq 1,2 \times$ stated limit, $\Delta C/C \leq 10\%$.	
9.19	Hb	Storage at low temperature	72 h at a temperature of 15 °C below the lower category temperature.			No visible damage; no leakage of electrolyte; leakage current \leq stated limit, $\tan \delta \leq$ stated limit; $\Delta C/C \leq 10\%$.	
9.20		Characteristics at high and low temperature		Step 1: reference measurement at 20 °C of capacitance, impedance at 100 Hz and $\tan \delta$. Step 2: measurement at lower category temperature. Step 3: measurement at upper category temperature.		Impedance at 100 Hz $\leq 7 \times$ value of step 1 for $U_R \leq 6,3$ V or $U_R > 160$ V, $\leq 5 \times$ value of step 1 for $6,3 < U_R \leq 16$ V, $\leq 4 \times$ value of step 1 for $16 < U_R \leq 160$ V.	
9.21		Charge and discharge		For $U_R \leq 160$ V: 10^6 cycles of 0.5 s charge to U_R ($RC = 0,1$ s) and 0.5 s discharge ($RC = 0,1$ s). For $U_R > 160$ V: under consideration.		Leakage current $\leq 5 \times$ stated limit at 85 °C, $\leq 3 \times$ stated limit at 70 °C. No visible damage, no leakage of electrolyte, $\Delta C/C \leq 10\%$.	

Solid aluminium capacitors

In the description of the procedure and the requirements of the tests, in some cases distinction has to be made for the types 2222 121, 2222 122 and 2222 123. In the table this distinction is indicated by 121/123 or 122 in the columns 'type'. If no indication is given in these columns reference is made to all types.

IEC 384-4 sub clause	IEC 68-2 test method	name of test	procedure (quick reference)			type	description	requirements
			type	description				
—	Ua	Tensile strength of terminations		Loading force 10 N for 10 s.			No visible damage.	
—	Ub	Bending of terminations		Loading force 5 N, two consecutive bends.			No visible damage.	
—	Uc	Torsion of terminations	121/ 123	Two successive rotations of 180° in opposite direction, 5 s per rotation.		121/ 123	No visible damage.	
9.8.2 (method 1A) Tb	Resistance to soldering heat (method 1B) Tb	Resistance to soldering heat (method 1B)	122	Solder bath: 260 °C, 10 s, for capacitors with printed-wiring pins.			No visible damage, marking legible, $\Delta C/C \leq 5\%$.	
9.8.1 Ta		Solderability	121/ 123	Solder bath: 350 °C, 3.5 s, for capacitors with solder leads.			No visible damage, marking legible, good tinning.	
			122	Solder bath: 235 °C, 2 s for capacitors with printed-wiring pins, immersed up to 2 mm from the body.				
			121/ 123	Solder bath: 270 °C, 2 s for capacitors with solder leads, immersed up to 2 mm from the body.				
9.9	Na	Rapid change of temperature		5 cycles of 30 min at upper and lower category temperature.			Leakage current \leq stated limit, $\tan \delta \leq$ stated limit.	
9.10	Fc	Vibration		10 to 500 Hz, 0.75 mm or 10g (whichever is less), 2 directions, 3 h per direction.			No visible damage, marking legible; $\Delta C/C \leq 5\%$ with respect to initial measurement.	

* For capacitors 2222 122, leakage current after 1 min.

ELECTROLYTIC AND SOLID CAPACITORS

IEC 384-4 sub clause	IEC 68-2 test method	name of test	procedure (quick reference)		type	description	requirements
			type	description			
9.11	Eb	Bump	40g, 2 directions, 4000 bumps total.			No visible damage; $\Delta C/C \leq 5\%$ with respect to initial measurement.	
	Ba	Dry heat	16 h upper category temperature, no voltage applied.			No visible damage.	
D	Damp heat, cyclic		1 cycle of 24 h at 55 ± 2 °C, R.H. 95 to 100%, no voltage applied.				
Aa	Cold		2 h at lower category temperature, no voltage applied.			No visible damage.	
M	Low air pressure		5 min. at 15 to 35 °C, at atmospheric pressure of 85 mbar, last minute UR applied.			No visible damage, no evidence of breakdown or flashover below 1000 V.	
D	Damp heat, cyclic		5 cycles of 24 h at 55 ± 2 °C, R.H. 95 to 100%, no voltage applied.				
				Final measurement.		No visible damage, marking legible; leakage current \leq stated limit, * $\tan \delta \leq 1,2 \times$ stated limit.	
					121 /	$\Delta C/C \leq 5\%$.	
					123		
					122	$\Delta C/C \leq 10\%$.	
9.13	Ca	Damp heat, steady state	56 days at 40 °C, R.H. 90 to 95%; no voltage applied.			No visible damage, marking legible; leakage current \leq stated limit; * $\tan \delta \leq 1,2 \times$ stated limit, insulation resistance $> 100 \text{ M}\Omega$, no breakdown or flashover below 1000 V.	
					121 /	$\Delta C/C \leq 5\%$.	
					123		
					122	$\Delta C/C \leq 15\%$.	

* For capacitors 2222 122, leakage current after 1 min.

IEC 384-4	IEC 68-2 test method	name of test	procedure (quick reference)		requirements	
sub clause			type	description	type	description
9.14	—	Endurance	122	2000 h at 125 °C, U_R^* applied.		No visible damage, marking legible; leakage current \leq stated limit, $\tan \delta \leq 1.2 \times$ stated limit, insulation resistance $> 100 \text{ M}\Omega$, no breakdown or flashover below 1000 V, $\Delta C/C \leq 10\%$.
			121 / 123	5000 h at 125 °C, U_R^{**} applied.		
				5000 h at 85 °C, U_R applied.		
9.15	—	Surge		From source of 1,15 x U_R at 85 °C or 1,15 x derated voltage at 125 °C, 1000 cycles of 30 s on, 330 s off.		No visible damage, leakage current \leq stated limit, $\tan \delta \leq$ stated limit.
						121 / $\Delta C/C \leq 5\%$.
						123
9.16	—	Reverse Voltage		0,30 x U_R in reverse polarity at 85 °C for 125 h, followed by U_R in forward polarity at 85 °C for 125 h.		No visible damage, leakage current \leq stated limit, $\tan \delta \leq 10\%$.
						121 / $\Delta C/C \leq 10\%$.
						123
9.18	Ha	Storage at upper category temperature		0,30 x U_R^{**} in reverse polarity at 125 °C for 125 h, followed by U_R^{**} in forward polarity at 125 °C for 125 h.		No visible damage, leakage current \leq stated limit, $\tan \delta \leq$ stated limit.
						121 / $\Delta C/C \leq 5\%$.
						123
9.16	—	Reverse Voltage		0,30 x U_R in reverse polarity at 85 °C for 125 h, followed by U_R in forward polarity at 125 °C for 125 h.		No visible damage, leakage current \leq stated limit, $\tan \delta \leq 10\%$.
						121 / $\Delta C/C \leq 10\%$.
						123

* 25 V for 40 V versions.

** 40 V for 50 V versions.

*** For capacitors 2222 122, leakage current after 1 min.

ELECTROLYTIC AND SOLID CAPACITORS

IEC 384-4 sub clause	IEC 68-2 test method	name of test	procedure (quick reference)		requirements
			type	description	
9.20		Characteristics at high and low temperature	Step 1: reference measurement at 20 °C of capacitance, impedance at 100 Hz and $\tan \delta$. Step 2: measurement at lower category temperature.		$\tan \delta \leq 2 \times$ stated limit, impedance ratio ≤ 2 , $\Delta C/C \leq 20\%$.
9.21		Charge and discharge	Step 3: measurement at upper category temperature. 10^5 cycles of 0,5 s charge to U_R and 0,5 s discharge.		Leakage current $\leq 10 \times$ stated limit, $\tan \delta \leq$ stated limit, $\Delta C/C \leq 20\%$. No visible damage, $\Delta C/C \leq 5\%$.

* For capacitors 2222 122, leakage current after 1 min.

ALUMINIUM ELECTROLYTIC CAPACITORS




DEVELOPMENT SAMPLE DATA

This information is derived from development samples made available for evaluation. It does not necessarily imply that the device will go into regular production.

2222 021

ALUMINIUM ELECTROLYTIC CAPACITORS

- Small type
- Axial leads or single ended
- Long life
- General and industrial applications

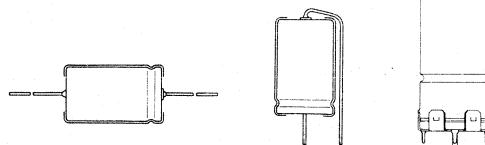

QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	220 to 15000 μF
Tolerance on nominal capacitance	$\pm 20\%$
Rated voltage range, U_R (R5 series)	10 to 63 V
Category temperature range	-55 to +85 °C
Basis specifications	IEC 384-4, long-life grade DIN 41316
Climatic category	55/085/56
IEC 68	FPF
DIN 40040	

Selection chart for $C_{\text{nom}}-U_R$ and relevant case sizes.

C_{nom} μF	U_R (V)				
	10	16	25	40	63
220					00
330					01
470				00	01
680			00	01	02
1000		00	01	01	03
1500	00	01	01	02	04
2200	01	01	02	03	05
3300	01	02	03	04	
4700	02	03	04	05	
6800	03	04	05		
10000	04	05			
15000	05				

case size	nominal dimensions (mm)
00	$\phi 10 \times 30$
01	$\phi 12,5 \times 30$
02	$\phi 15 \times 30$
03	$\phi 18 \times 30$
04	$\phi 18 \times 40$
05	$\phi 21 \times 40$

APPLICATION

These capacitors have extremely high CU-product per unit volume, which render them very suitable for applications, where high requirements are imposed on size and mass, e.g. portable and mobile equipment. They are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and video circuits, and in other applications such as measuring, regulating, timing and delay circuits.

DESCRIPTION

The capacitors are available in 3 styles, all with aluminium case, and soldered-copper leads.

* Style 1: axial leads; case insulated with a blue plastic sleeve.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 03, 04 and 05.

Style 3: single ended; case insulated with a blue plastic sleeve; case sizes 00, 01 and 02.

MECHANICAL DATA

Dimensions in mm

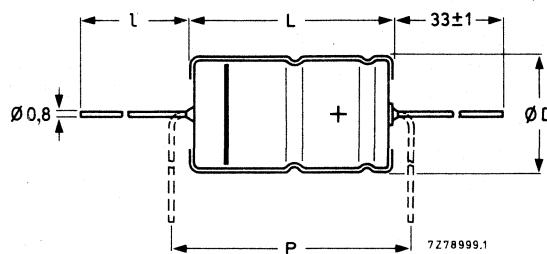


Fig. 1 Style 1; see Table 1a for dimensions D, L, I and P.

Table 1a

case size	style 1					
	D _{nom}	L _{nom}	D _{max}	L _{max}	I	P _{min}
00	10,0	30,0	10,5	30,5	55 ± 1	35,0
01	12,5	30,0	13,0	30,5	55 ± 1	35,0
02	15,0	30,0	15,5	30,5	55 ± 1	35,0
03	18,0	30,0	18,5	30,5	55 ± 1	35,0
04	18,0	40,0	18,5	41,5	34 ± 1	45,0
05	21,0	40,0	21,5	41,5	34 ± 1	45,0

Table 1b

case size	style 2				
	d	D1	D2 _{max}	D3	L
03	0,8	18,0	20,5	18,5 ± 0,2	31 ± 1
04	1,0	18,0	20,5	18,5 ± 0,2	42 ± 1
05	1,0	21,0	23,5	21,5 ± 0,2	42 ± 1

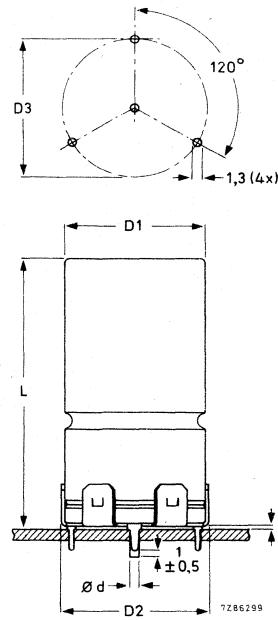


Fig. 2 Style 2; Table 1b for dimensions d, D1, D2, D3 and L.

Table 1c

case size	style 3			
	d	D _{max}	L _{max}	P
00	0,8	10,5	34,0	7,5-12,5
01	0,8	13,0	34,0	7,5-12,5
02	0,8	15,5	34,0	10,0-15,0

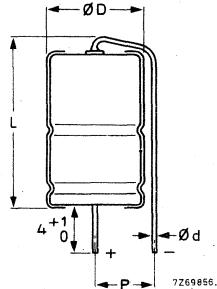


Fig. 3 Style 3; see Table 1c for dimensions d, D, L and P.

Marking

The capacitors are marked with:

nominal capacitance; tolerance on nominal capacitance; rated voltage; group number 021; code of origin; name of manufacturer; date code (year and month) according to IEC 62; band to identify the negative terminal.

Mounting

The diameter of the mounting holes in the printed-wiring board is $1 + 0,1$ mm for style 1 and style 3 capacitors, and $1,3 + 0,1$ mm for style 2 capacitors. (The diameter of the centre hole for the anode lead of style 2 capacitors, case size 03, is $1 + 0,1$ mm.)

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%. (See also the relevant paragraphs.)

U_R	nom. cap. μF	max. r.m.s. ripple current at $T_{amb} = 85$ °C mA	max. leakage current at U_R after 1 min μA	max. ESR Ω	case size	catalogue number*
10	1500	570	94	0,245	00	2222 021 . 4152
	2200	740	136	0,177	01	. 4222
	3300	920	202	0,128	01	. 4332
	4700	1150	286	0,100	02	. 4472
	6800	1460	412	0,079	03	. 4682
	10000	1840	604	0,064	04	. 4103
	15000	2200	904	0,054	05	. 4153
16	1000	530	100	0,260	00	. 5102
	1500	680	148	0,205	01	. 5152
	2200	880	216	0,150	01	. 5222
	3300	1120	321	0,111	02	. 5332
	4700	1390	455	0,087	03	. 5472
	6800	1760	656	0,070	04	. 5682
	10000	2100	964	0,058	05	. 5103
25	680	480	106	0,323	00	. 6681
	1000	630	154	0,220	01	. 6102
	1500	780	229	0,179	01	. 6152
	2200	1020	334	0,132	02	. 6222
	3300	1240	499	0,099	03	. 6332
	4700	1650	709	0,079	04	. 6472
	6800	2000	1024	0,064	05	. 6682

* Replace dot in catalogue number by:

1 for style 1,

4 for style 2 (case sizes 03, 04, 05),

8 for style 3 (case sizes 00, 01, 02).

U_R V	nom. cap. μF	max. r.m.s. ripple current at $T_{amb} = 85^\circ C$ mA	max. leakage current at U_R after 1 min μA	max. ESR Ω	case size	catalogue number*
40	470	440	117	0,404	00	2222 021 . 7471
	680	580	167	0,279	01	. 7681
	1000	730	244	0,190	01	. 7102
	1500	815	364	0,159	02	. 7152
	2200	1170	532	0,118	03	. 7222
	3300	1500	796	0,090	04	. 7332
	4700	1815	1132	0,072	05	. 7472
63	220	350	88	0,614	00	. 8221
	330	480	129	0,409	01	. 8331
	470	570	182	0,287	01	. 8471
	680	770	261	0,199	02	. 8681
	1000	1035	382	0,135	03	. 8102
	1500	1330	571	0,122	04	. 8152
	2200	1740	836	0,099	05	. 8222

CapacitanceNominal capacitance at 100 Hz and $T_{amb} = 25^\circ C$

see Table 2

Tolerance on nominal capacitance at 100 Hz

 $\pm 20\%$ **Voltage**

Rated voltage = max. permissible voltage

$< 50^\circ C$	$50 \text{ to } 85^\circ C$
$1,1 \times U_R$	U_R

Ripple voltage** = max. permissible a.c. voltage providing the following three conditions are met:

- max. (d.c. + peak a.c.) voltage
- max. peak a.c. voltage without d.c. voltage applied
- momentary value of applied voltage

$1,1 \times U_R$	U_R
2 V	2 V

Surge voltage = max. permissible voltage for short periods

$1,2 \times U_R$	$1,15 \times U_R$
2 V	2 V

Reverse voltage = max. d.c. voltage applied in the reverse polarity

at the maximum category temperature for short periods

$2 V$
$2 V$

* Replace dot in catalogue number by:

1 for style 1,

4 for style 2 (case sizes 03, 04, 05),

8 for style 3 (case sizes 00, 01, 02).

** Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current*

Maximum permissible r.m.s. ripple current at
100 Hz and $T_{amb} = 85^{\circ}\text{C}$

see Table 2

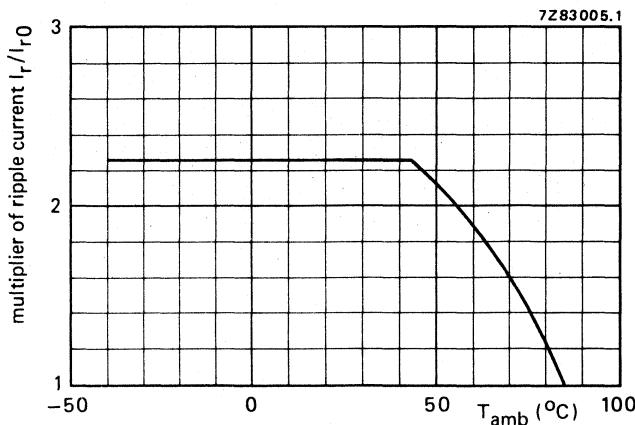


Fig. 4 Typical ripple current as a function of ambient temperature; I_{r0} = ripple current at 85°C .

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r\ max}^2$$

$I_{r\ max}$ = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$r_n = I_r/I_{r0}$ = multiplying factor at a same frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Leakage current

Maximum leakage current 1 min after application
of the rated voltage at $T_{amb} = 25^{\circ}\text{C}$

see Table 2 (0,006 CU + 4 μA)

Leakage current during continuous operation at U_R ,
at $T_{amb} = 25^{\circ}\text{C}$

at $T_{amb} = 85^{\circ}\text{C}$

approx. $0,01 \times$ values stated
in Table 2

\leq values stated in Table 2

If the leakage current is too high, owing to prolonged storage and/or storage at an excessive temperature ($> 40^{\circ}\text{C}$), application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

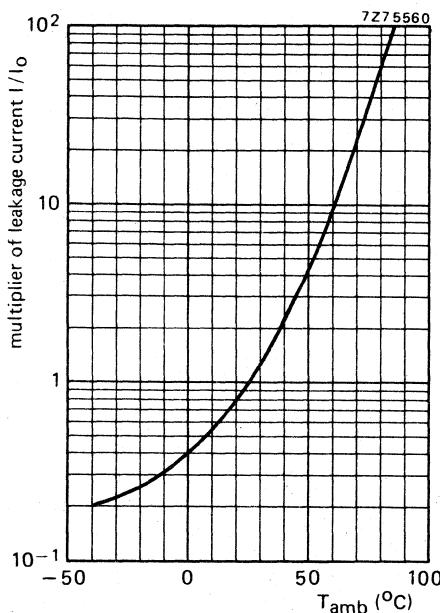
DEVELOPMENT SAMPLE DATA

Fig. 5 Typical leakage current as a function of ambient temperature;
 I_0 = leakage current during continuous operation at 25°C and U_R .

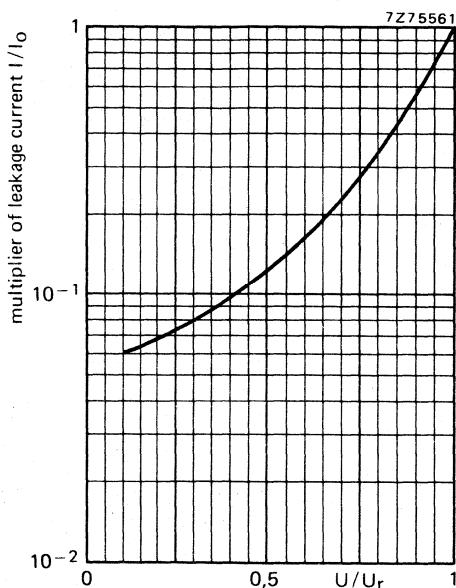


Fig. 6 Typical leakage current as a function of U/U_R ; I_0 = leakage current during continuous operation at 25°C and U_R .

Equivalent series resistance (ESR)

Maximum ESR at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$, measured
by means of a four-terminal circuit (Thomson Circuit)

see Table 2

Tan δ (dissipation factor)

$$\text{Tan } \delta = \text{ESR} \times \omega C$$

Equivalent series inductance (ESL)

Case sizes 00 and 01	50 nH	typical values
Case size 02	55 nH	
Case sizes 03, 04 and 05	60 nH	

OPERATIONAL DATA

Category temperature range for rated voltage -55 to $+85^{\circ}\text{C}$

PACKING

The capacitors are packed in boxes of 200 (case sizes 00 to 03) or 100 (case sizes 04, 05).


TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 021 are small types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads or single ended
- Long life
- General and industrial applications

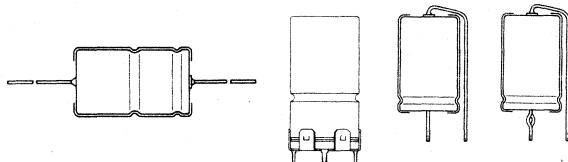

Selection chart for C_{nom} - U_R and relevant case sizes

C_{nom} μF	U _R (V)										
	6,3	10	16	25	40	63	100	160	250	350	385
0,33						2					
0,47						2					
0,68						2					
1						2	2				4
1,5						2					
2,2				1		2	2		4		5
3,3			1			2	2				
4,7		1				2	3	4	5	6	7
6,8	1				2	2	3			00	00
10	1			2	2	3	4/5a	5	7/00	01	01
15		2			2	3			01	01	02
22	2		2	3	4/5a	5	7/00	01	02	02	03
33	2	2		3		6	01	02	03	04	
47	2		3	4/5a	5	7	02	03	04	04	
68	2	3			6	00	02	04	05	05	
100	3			4/5a	5	7	01	03	05		
150	3		4/5a	5	6	00	02	04			
220		4/5a	5	6	7/00	01	03	05			
330	5	6	7	01	02	04					
470	5	6	7	00	01	02	05				
680	6	7	00	01	02	03	05				
1 000	7	00	01	02	03	05					
1 500	00	01	02	03	04	05					
2 200	01	02	03	04	05						
3 300	02	03	04	05	05						
4 700	03	04	05	05							
6 800	04	05	05								
10 000	05	05									
15 000	05										
2222 030; 031; 032; 033 see pages 33 to 75										2222 041; 042; 043 see pages 109 to 127	

Miniature types

case size	nominal dimensions mm	series number
1	Ø 3,3 x 10	030
2	Ø 4,5 x 10	
3	Ø 6 x 10	
5a	Ø 8 x 11	
4	Ø 6,5 x 18	031
5	Ø 8 x 18	
6	Ø 10 x 18	
7	Ø 10 x 25	041


Small types

case size	nominal dimensions mm	series number
00	Ø 10 x 30	032
01	Ø 12,5 x 30	
02	Ø 15 x 30	
03	Ø 18 x 30	
04	Ø 18 x 40	
05	Ø 21 x 40	043

2222 030
2222 031
2222 032
2222 033

ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads or single ended
- Long life
- General and industrial applications

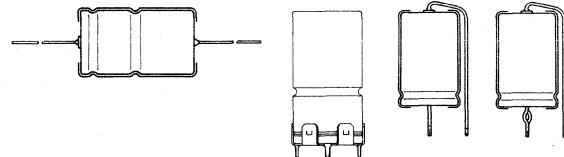

QUICK REFERENCE DATA

Nominal capacitance range

(E6 series): 0,33 to 15 000 μF

Tolerance on nominal capacitance: -10 to +50%

Rated voltage range, U_R

(R5 series): 6,3 to 100 V

Category temperature range:

-40 to +85 °C

Endurance test at 85 °C

case size 1: 1000 h

case sizes 2 to 7: 2000 h

case sizes 00 to 05: 5000 h

Basic specifications:

IEC 384-4, long-life grade

DIN 41316 (6,3 to 63 V versions)

DIN 41332 (100 V version)

Climatic category

IEC 68: 40/085/56

DIN 40040: GPF

Selection chart for $C_{\text{nom}}-U_R$ and relevant case sizes.

C_{nom} μF	U_R (V)						
	6,3	10	16	25	40	63	100
0,33						2	
0,47						2	
0,68						2	
1						2	2
1,5						2	
2,2					1	2	2
3,3				1		2	2
4,7			1			2	3
6,8	1				2	2	3
10	1				2	2	3
15			2		2	3	
22		2		2	3	4/5a	5
33	2		2		3		6
47		2		3	4/5a	5	7
68	2		3		6		00
100		3			4/5a	5	7
150	3			4/5a	5	6	00
220		4/5a	5	6	7/00	01	03
330		5	6	7	01	02	04
470	5	6	7	00	01	02	05
680	6	7	00	01	02	03	05
1 000	7	00	01	02	03	05	
1 500	00	01	02	03	04	05	
2 200	01	02	03	04	05		
3 300	02	03	04	05	05		
4 700	03	04	05	05			
6 800	04	05	05				
10 000	05	05					
15 000	05						

case size	nominal dimensions (mm)	series number	miniature
1	Ø 3,3 x 10		
2	Ø 4,5 x 10		
3	Ø 6 x 10		
5a	Ø 8 x 11	030	
4	Ø 6,5 x 18		
5	Ø 8 x 18		
6	Ø 10 x 18	031	
7	Ø 10 x 25		
00	Ø 10 x 30		
01	Ø 12,5 x 30		
02	Ø 15 x 30		
03	Ø 18 x 30	032	
04	Ø 18 x 40		
05	Ø 21 x 40	033	

2222 030
2222 031
2222 032
2222 033

APPLICATION

These capacitors with high CU-product per unit volume are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications, such as measuring and regulating circuits. Other applications are in timing and delay circuits. The taped versions are extremely suitable for automatic insertion and for cutting and forming equipment.

DESCRIPTION

The capacitors have etched aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitors are available in 4 styles, all with soldered-copper leads.

Style 1: axial leads; case sizes 1 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 03, 04 and 05.

Style 3: single ended; case sizes 1 to 7 and 00 to 03;

Style 4: single ended with self-locking lead; case sizes 4 to 7; non-preferred.

MECHANICAL DATA

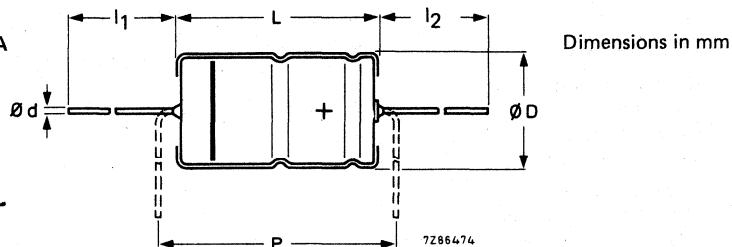


Fig. 1 Style 1; see Table 1a for dimensions d, D, L, l₁ and P.

$$l_2 = 33 \pm 1 \text{ mm for case sizes 00 to 05.}$$

Table 1a

case size	d	l ₁	style 1					mass approx. g
			D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	
1	0,6	*	3,3	10,0	3,5	11,0	15	0,35
2	0,6	*	4,5	10,0	5,0	10,5	15	0,50
3	0,6	*	6,0	10,0	6,3	10,5	15	0,70
5a	0,6	*	8,0	11,0	8,5	11,5	15	1,1
4	0,8	*	6,5	18,0	6,9	18,5	25	1,3
5	0,8	*	8,0	18,0	8,5	18,5	25	1,7
6	0,8	*	10,0	18,0	10,5	18,5	25	2,5
7	0,8	*	10,0	25,0	10,5	25,0	30	3,3
00	0,8	55 ± 1	10,0	30,0	10,5	30,5	35,0	4
01	0,8	55 ± 1	12,5	30,0	13,0	30,5	35,0	6,3
02	0,8	55 ± 1	15,0	30,0	15,5	30,5	35,0	8,2
03	0,8	55 ± 1	18,0	30,0	18,5	30,5	35,0	10,9
04	0,8	34 ± 1	18,0	40,0	18,5	41,5	45,0	14
05	0,8	34 ± 1	21,0	40,0	21,5	41,5	45,0	19

* Case sizes 1 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).

Table 1b

case size	style 2						mass approx. g
	d ₁	d ₂	D ₁	D _{2,max}	D ₃	L	
03	0,8	1 + 0,1	18,0	20,5	18,5 ± 0,2	31 ± 1	11,5
04	1,0	1,3 + 0,1	18,0	20,5	18,5 ± 0,2	42 ± 1	15
05	1,0	1,3 + 0,1	21,0	23,5	21,5 ± 0,2	42 ± 1	20

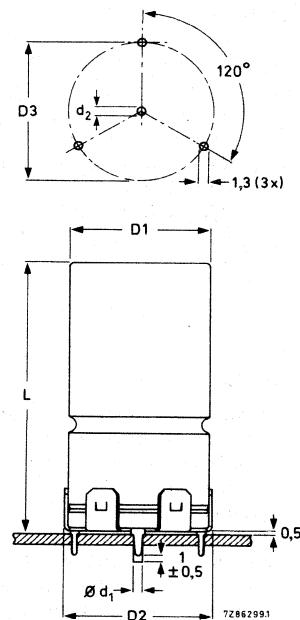
Fig. 2 Style 2; see Table 1b for dimensions d₁, d₂, D₁, D₂, D₃ and L.

Table 1c

case size	d	style 3			mass approx. g
		D _{max}	L _{max}	P	
1	0,6	3,5	13,0	2,5 – 5	0,25
2	0,6	5,0	12,5	2,5 – 5	0,40
3	0,6	6,3	12,5	3,5 – 7,5	0,55
5a	0,6	8,5	13,0	5 – 10	1,0
4	0,8	6,9	21,5	5 – 10	1,2
5	0,8	8,5	21,5	5 – 10	1,6
6	0,8	10,5	21,5	7,5 – 12,5	2,3
7	0,8	10,5	28,0	7,5 – 12,5	3,1
00	0,8	10,5	34,0	7,5 – 12,5	3,8
01	0,8	13,0	34,0	7,5 – 12,5	6,1
02	0,8	15,5	34,0	10,0 – 15,0	8,0
03	0,8	18,5	34,0	10,0 – 15,0	10,7





Fig. 3 Style 3 see Table 1c for dimensions d, D, L and P.

2222 030
2222 031
2222 032
2222 033

Table 1d

case size	d	style 4			mass approx g
		D _{max}	L _{max}	P	
4	0,8	6,9	21,5	5 -10	1,2
5	0,8	8,5	21,5	5 -10	1,6
6	0,8	10,5	21,5	7,5-12,5	2,3
7	0,8	10,5	28,0	7,5-12,5	3,1

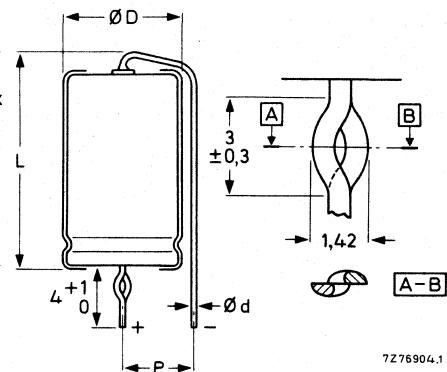

7Z76904.1

Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance (not for case size 1);
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal (not for case sizes 1 to 5a).

Fig. 4 Style 4; non-preferred; see Table 1d for dimensions d, D, L and P.

Mounting

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameters are shown in Table 1e.

Table 1e

style	lead/pin diameter	required hole diameter
1 and 3	0,6 mm lead 0,8 mm lead	0,8 + 0,1 mm 1,0 + 0,1 mm
2	0,8 mm anode pin 1,0 mm anode pin cathode pins	1 + 0,1 mm 1,3 + 0,1 mm 1,3 + 0,1 mm
4	anode lead 0,8 mm cathode lead	1,3 + 0,1 mm 1,0 + 0,1 mm

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Table 2 (footnote is at the end of the table).

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nom. cap.	max. r.m.s. ripple current at 85 °C	max. leakage current at U_R after 1 min.	max. $\tan \delta$	max. ESR	max. impedance Ω	case size	catalogue number * 2222 followed by
V	μF	mA	μA		Ω	at 10 kHz	at 1 kHz	
6,3	10	14	5	0,30	47,8	20	1	030 .3109
6,3	33	42	11	0,25	12,1	6,1	2	030 .3339
6,3	68	53	22	0,25	5,86	2,9	2	030 .3689
6,3	150	87	10	0,25	2,66	1,3	3	030 .3151
6,3	470	220	22	0,25	0,85	0,43	5	031 .3471
6,3	680	350	30	0,25	0,59	0,29	6	031 .3681
6,3	1000	480	42	0,25	0,40	0,20	7	031 .3102
6,3	1500	450	61	0,28	0,30		00	032 .3152
6,3	2200	610	88	0,29	0,21		01	032 .3222
6,3	3300	790	129	0,32	0,15		02	032 .3332
6,3	4700	1000	182	0,34	0,12		03	032 .3472
6,3	6800	1280	261	0,39	0,09		04	033 .3682
6,3	10000	1570	382	0,45	0,07		05	033 .3103
6,3	15000	1600	571	0,67	0,07		05	033 .3153
10	6,8	14	5	0,25	58,6	24	1	030 .4688
10	22	42	11	0,20	14,5	7,3	2	030 .4229
10	47	53	24	0,20	6,78	3,4	2	030 .4479
10	100	87	10	0,20	3,19	1,6	3	030 .4101
10	220	150	18	0,20	1,45	0,73	5a	030 .4221
10	220	150	18	0,20	1,45	0,73	4	031 .4221
10	330	220	24	0,20	0,97	0,48	5	031 .4331
10	470	350	33	0,20	0,68	0,34	6	031 .4471
10	680	480	45	0,20	0,47	0,24	7	031 .4681
10	1000	430	64	0,20	0,32	0,20	00	032 .4102
10	1500	570	94	0,23	0,25		01	032 .4152
10	2200	740	136	0,24	0,18		02	032 .4222
10	3300	950	202	0,27	0,13		03	032 .4332
10	4700	1220	286	0,29	0,10		04	033 .4472
10	6800	1500	412	0,34	0,08		05	033 .4682
10	10000	1520	604	0,49	0,08		05	033 .4103



2222 030
2222 031
2222 032
2222 033

U_R	nom. cap.	max. r.m.s. ripple current at 85 °C	max. leakage current at U_R after 1 min.	max. $\tan \delta$	max. ESR	max. impedance		case size	catalogue number * 2222 followed by
						Ω	Ω		
16	4,7	14	5	0,20	67,8	26		1	030 .5478
16	15	42	12	0,16	17,0	8		2	030 .5159
16	33	53	27	0,16	7,72	3,6		2	030 .5339
16	68	87	11	0,16	3,75	1,8		3	030 .5689
16	150	150	19	0,16	1,70	0,80		5a	030 .5151
16	150	150	19	0,16	1,70	0,80		4	031 .5151
16	220	220	26	0,16	1,16	0,55		5	031 .5221
16	330	350	36	0,16	0,78	0,36		6	031 .5331
16	470	480	49	0,16	0,55	0,26		7	031 .5471
16	680	400	70	0,16	0,38	0,18		00	032 .5681
16	1000	550	100	0,16	0,26	0,12		01	032 .5102
16	1500	680	148	0,19	0,21		0,17	02	032 .5152
16	2200	880	216	0,20	0,15		0,13	03	032 .5222
16	3300	1160	321	0,23	0,11		0,08	04	033 .5332
16	4700	1430	455	0,25	0,09		0,06	05	033 .5472
16	6800	1460	657	0,36	0,08		0,06	05	033 .5682
25	3,3	13	5	0,18	86,9	27		1	030 .6338
25	10	36	13	0,14	22,3	9		2	030 .6109
25	22	43	28	0,14	10,2	4,1		2	030 .6229
25	47	83	12	0,14	4,80	1,9		3	030 .6479
25	100	120	19	0,14	2,23	0,90		5a	030 .6101
25	100	120	19	0,14	2,23	0,90		4	031 .6101
25	150	190	27	0,14	1,49	0,60		5	031 .6151
25	220	280	37	0,14	1,02	0,41		6	031 .6221
25	330	350	54	0,14	0,68	0,27		7	031 .6331
25	470	360	75	0,14	0,47	0,19		00	032 .6471
25	680	500	106	0,14	0,32	0,13		01	032 .6681
25	1000	660	154	0,14	0,22	0,09		02	032 .6102
25	1500	810	229	0,17	0,18		0,15	03	032 .6152
25	2200	1060	334	0,18	0,13		0,10	04	033 .6222
25	3300	1340	499	0,21	0,10		0,07	05	033 .6332
25	4700	1370	709	0,28	0,10		0,06	05	033 .6472

U_R	nom. cap.	max. r.m.s. ripple current at 85 °C	max. leakage current at U_R after 1 min.	max. $\tan \delta$	max. ESR	max. impedance Ω	case size	catalogue number * 2222 followed by
V	μF	mA	μA		Ω	at 10 kHz	at 1 kHz	
40	2,2	13	5	0,15	109	32		1 030 .7228
40	6,8	36	14	0,11	25,8	10		2 030 .7688
40	10	38	20	0,11	17,6	7		2 030 .7109
40	15	43	30	0,11	11,7	4,7		2 030 .7159
40	22	61	9	0,11	8,0	3,2		3 030 .7229
40	33	83	12	0,11	5,31	2,1		3 030 .7339
40	47	120	16	0,11	3,73	1,5		5a 030 .7479
40	47	120	16	0,11	3,73	1,5		4 031 .7479
40	100	190	28	0,11	1,75	0,70		5 031 .7101
40	150	280	40	0,11	1,17	0,47		6 031 .7151
40	220	430	57	0,11	0,80	0,32		7 031 .7221
40	220	260	57	0,12	0,86	0,32		00 032 .7221
40	330	370	84	0,12	0,58	0,21		01 032 .7331
40	470	440	117	0,12	0,40	0,15		01 032 .7471
40	680	580	167	0,12	0,28	0,10		02 032 .7681
40	1000	780	244	0,12	0,19	0,07		03 032 .7102
40	1500	970	364	0,15	0,16		0,13	04 033 .7152
40	2200	1220	532	0,16	0,12		0,09	05 033 .7222
40	3300	1284	796	0,24	0,11		0,07	05 033 .7332
63	0,33	5	5	0,09	435	167		2 030 .8337
63	0,47	8	5	0,09	305	117		2 030 .8477
63	0,68	10	5	0,09	211	81		2 030 .8687
63	1,0	12	5	0,09	143	55		2 030 .8108
63	1,5	12	5	0,09	95,6	37		2 030 .8158
63	2,2	21	7	0,09	65,2	25		2 030 .8228
63	3,3	25	11	0,09	46,5	17		2 030 .8338
63	4,7	31	15	0,09	30,5	12		2 030 .8478
63	6,8	35	22	0,09	21,1	8,1		2 030 .8688
63	10	51	7	0,08	12,8	5,5		3 030 .8109
63	15	61	10	0,08	8,5	3,7		3 030 .8159
63	22	90	13	0,08	5,79	2,5		5a 030 .8229
63	22	90	13	0,08	5,79	2,5		4 031 .8229
63	47	120	22	0,08	2,71	1,2		5 031 .8479
63	68	200	30	0,08	1,88	0,81		6 031 .8689
63	100	260	42	0,08	1,28	0,55		7 031 .8101
63	150	260	61	0,08	0,90	0,37		00 032 .8151
63	220	350	88	0,08	0,61	0,25		01 032 .8221
63	330	480	129	0,08	0,41	0,17		02 032 .8331
63	470	570	182	0,08	0,29	0,15		02 032 .8471
63	680	770	261	0,08	0,20	0,08		03 032 .8681
63	1000	1140	382	0,08	0,14	0,06		05 033 .8102
63	1500	1110	571	0,12	0,15		0,15	05 033 .8152

2222 030
2222 031
2222 032
2222 033

U_R	nom. cap.	max. r.m.s. ripple current at 85°C	max. leakage current at U_R after 1 min.	max. $\tan \delta$	max. ESR	max. impedance Ω	case size	catalogue number * 2222 followed by
V	μF	mA	μA		Ω	at 10 kHz	at 1 kHz	
100	1,0	14	5	0,08	128	45	2	030 .9108
100	2,2	25	11	0,08	57,9	21	2	030 .9228
100	3,3	35	17	0,08	38,6	14	2	030 .9338
100	4,7	38	22	0,07	23,7	9,6	3	030 .9478
100	6,8	61	34	0,07	16,4	6,6	3	030 .9688
100	10	90	50	0,07	11,2	4,5	5a	030 .9109
100	10	90	50	0,07	11,2	4,5	4	031 .9109
100	22	120	80	0,07	5,07	2,1	5	031 .9229
100	33	200	119	0,07	3,38	1,4	6	031 .9339
100	47	260	33	0,07	2,37	0,96	7	031 .9479
100	68	130	45	0,15	3,53	2,0	00	032 .9689
100	100	190	64	0,15	2,40	1,2	01	032 .9101
100	150	250	94	0,15	1,60	0,85	02	032 .9151
100	220	330	136	0,15	1,09	0,60	03	032 .9221
100	330	460	202	0,15	0,73	0,50	04	033 .9331
100	470	600	286	0,15	0,51	0,35	05	033 .9471
100	680	650	412	0,15	0,42	0,35	05	033 .9681

* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 1 to 4)

3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) } case sizes 1 to 7

4 for style 2;

8 for style 3;



7 for style 4.

CapacitanceNominal capacitance at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50%

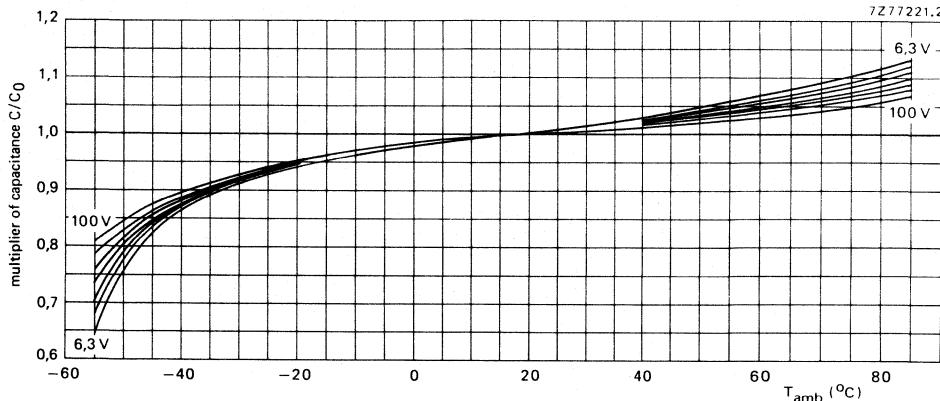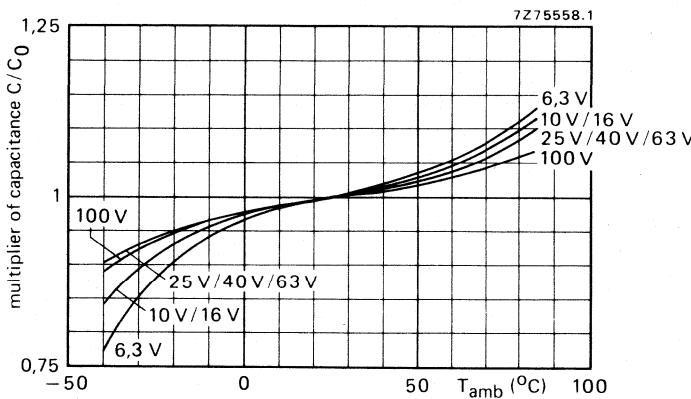Fig. 5 Multiplier of capacitance as a function of ambient temperature; **case sizes 1 to 7**; C_0 = capacitance at 20°C , 100 Hz.Fig. 6 Multiplier of capacitance as a function of ambient temperature; **case sizes 00 to 05**; C_0 = capacitance at 25°C , 100 Hz.

2222 030
2222 031
2222 032
2222 033

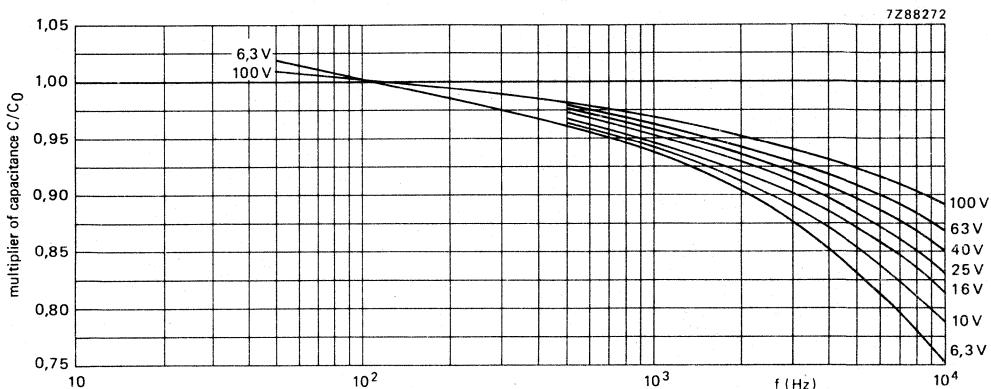


Fig. 7 Multiplier of capacitance as a function of frequency; case sizes 1 to 7; C_0 = capacitance at 20 °C, 100 Hz.

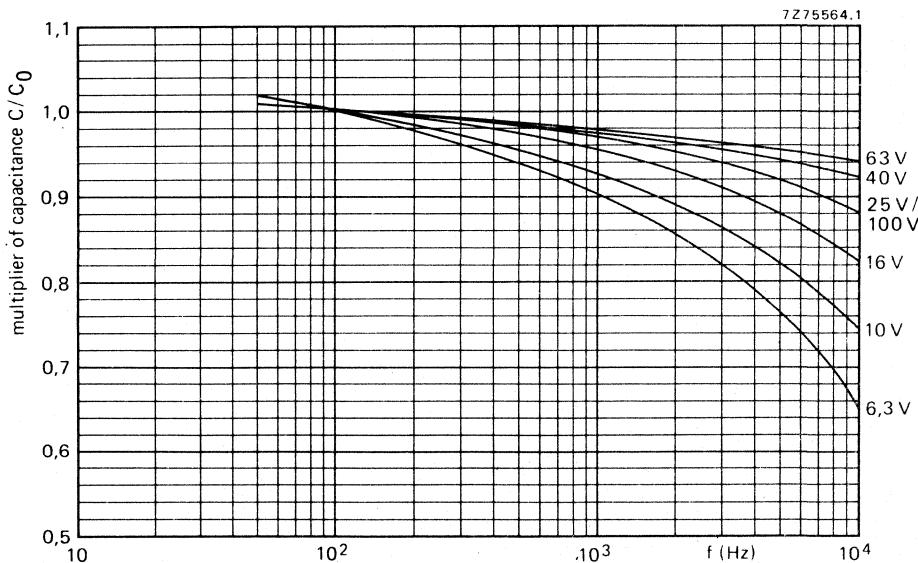


Fig. 8 Multiplier of capacitance as a function of frequency; case sizes 00 to 05; C_0 = capacitance at 25 °C, 100 Hz.

Voltage

Rated voltage = max. permissible voltage

$\leq 40^\circ\text{C}$	$40 \text{ to } 85^\circ\text{C}$
$1,1 \times U_R$	U_R

Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met:

- max. (d.c. + peak a.c.) voltage
- max. peak a.c. voltage with d.c. voltage applied
- max. peak a.c. voltage without d.c. voltage applied

$$\begin{aligned} &\leq 1,1 \times U_R \\ &\leq \text{applied d.c. voltage} + 1 \text{ V} \\ &1 \text{ V} \end{aligned}$$

Surge voltage = max. permissible voltage for short periods

$$1,15 \times U_R$$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

$$1 \text{ V}$$

Ripple current **


Maximum permissible r.m.s. ripple current at

100 Hz and $T_{\text{amb}} = 85^\circ\text{C}$

see Table 2

100 Hz and $T_{\text{amb}} = 40^\circ\text{C}$

2,24 x values stated in Table 2

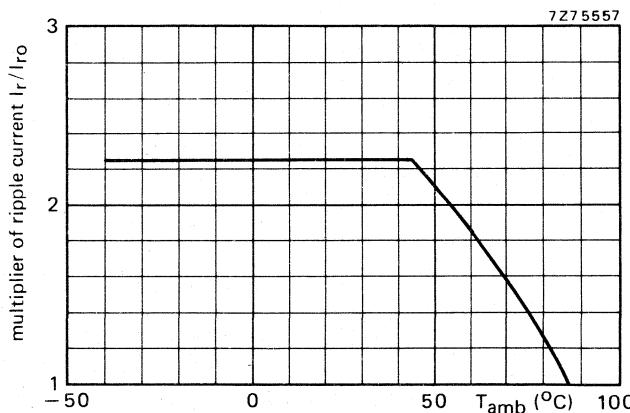Fig. 9 Multiplier of ripple current as a function of ambient temperature; I_{r0} = ripple current at 85°C , 100 Hz.

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

** Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

2222 030
2222 031
2222 032
2222 033

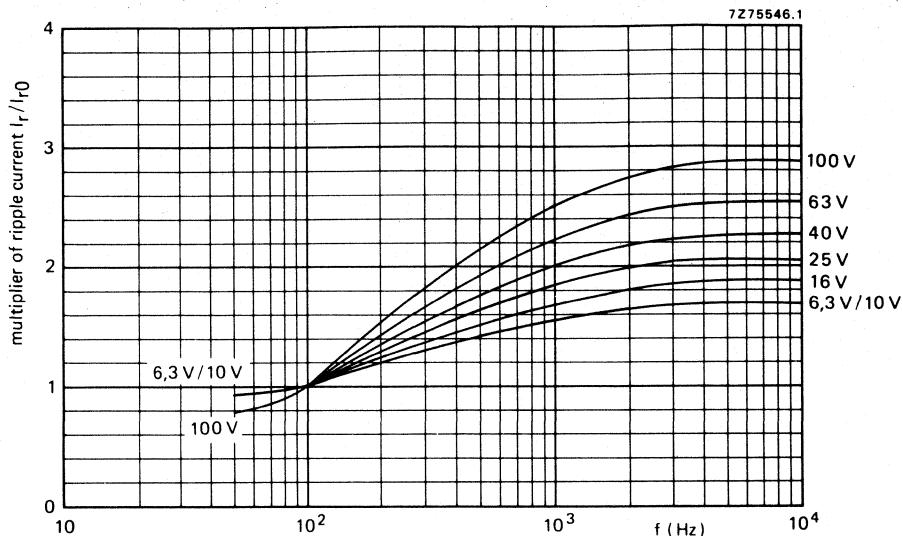


Fig. 10 Multiplier of ripple current as a function of frequency, **case sizes 1 to 7**; I_{r0} = ripple current at 100 Hz and upper category temperature.

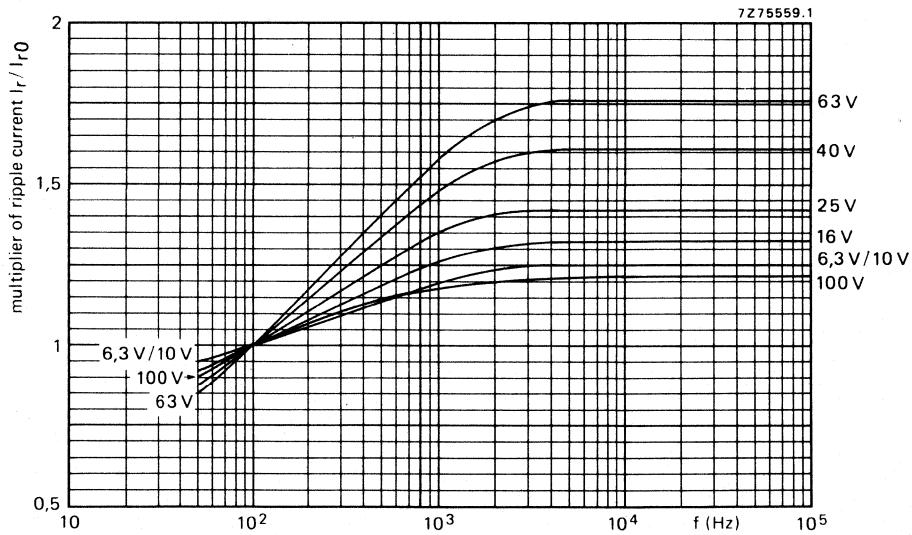


Fig. 11 Multiplier of ripple current as a function of frequency, **case sizes 00 to 03**; I_{r0} = ripple current at 85 °C, 100 Hz.

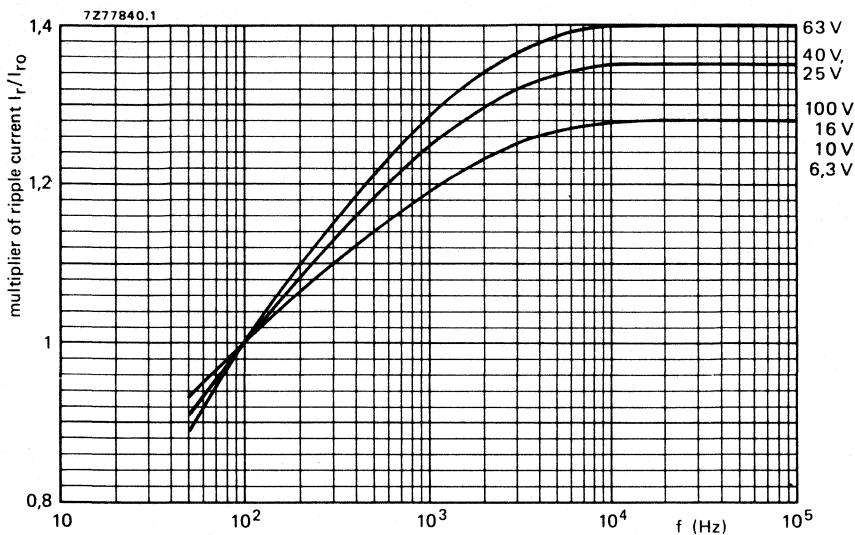


Fig. 12 Multiplier of ripple current as a function of frequency, case sizes 04 and 05; I_{r0} = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$ = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$ = multiplying factor at a same frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

2222 030
2222 031
2222 032
2222 033

Leakage current

Maximum leakage current 1 min after application of U_R , at $T_{amb} = 20^\circ\text{C}$.

case sizes 1 and 2

see Table 2 (0,05 CU or 5 μA , whichever is greater)

case sizes 3 to 7 and 00 to 05

see Table 2 (0,006 CU + 4 μA for $CU > 1000 \mu\text{C}$; 0,01 CU or 1 μA , whichever is greater for $CU \leq 1000 \mu\text{C}$)

Leakage current during continuous operation at U_R ,

at $T_{amb} = 20^\circ\text{C}$, case sizes 1 to 7

at $T_{amb} = 20^\circ\text{C}$, case sizes 00 to 05

at $T_{amb} = 85^\circ\text{C}$

approx. $0,1 \times$ values of Table 2

approx. $0,01 \times$ values of Table 2

\leq values of Table 2

If owing to prolonged storage and/or storage at an excessive temperature ($> 40^\circ\text{C}$) the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

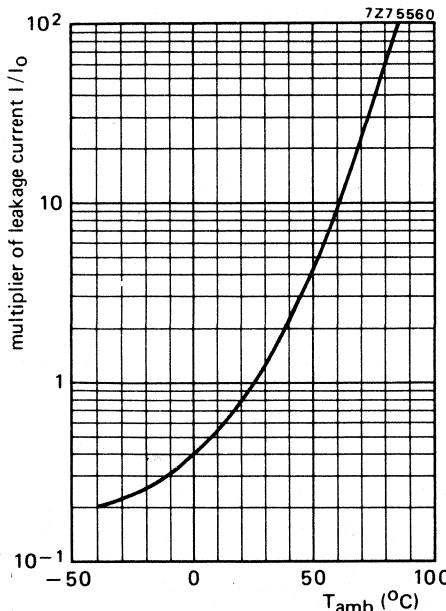


Fig. 13 Multiplier of leakage current as a function of ambient temperature, case sizes 00 to 05;

I_o = leakage current during continuous operation at 25°C and U_R .

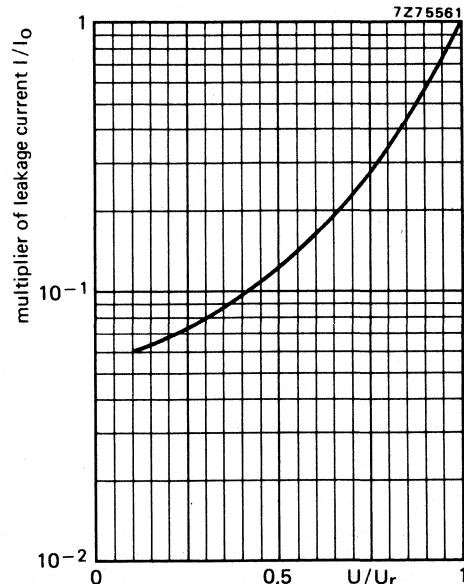
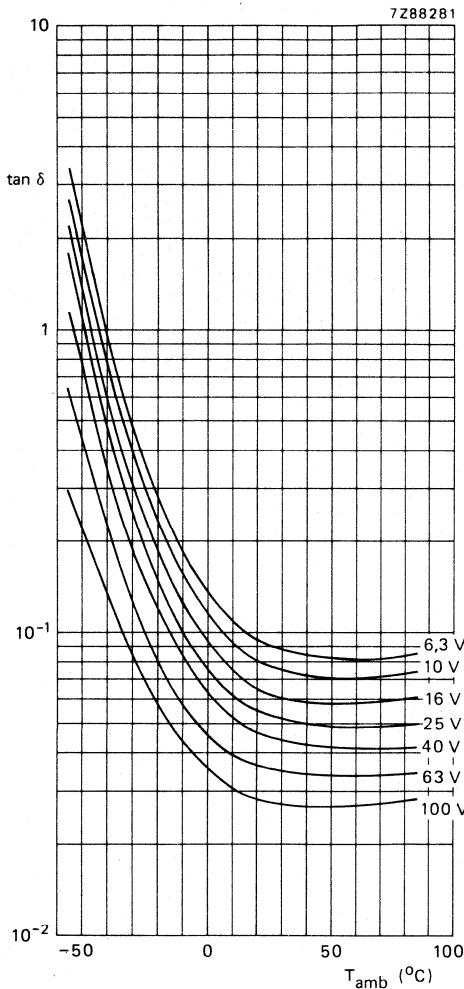


Fig. 14 Multiplier of leakage current as a function of U/U_R , case sizes 00 to 05; I_o = leakage current during continuous operation at 25°C and U_R .

Tan δMaximum tan δ at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$ see Table 2Fig. 15 Typical $\tan \delta$ as a function of ambient temperature at 100 Hz; case sizes 1 to 7.

2222 030
2222 031
2222 032
2222 033

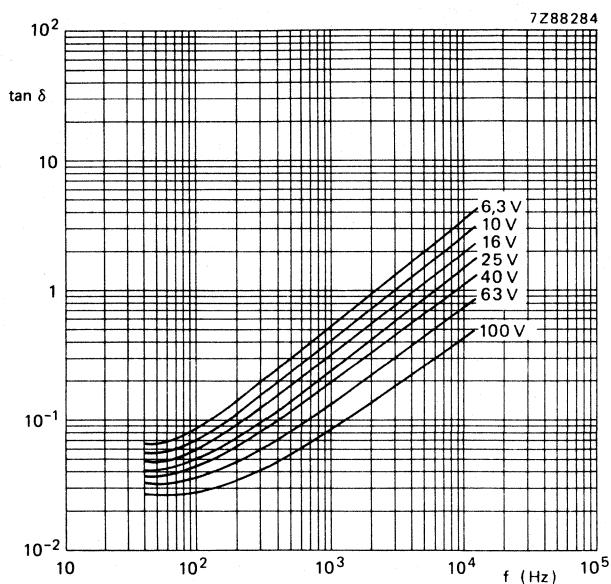


Fig. 16 Typical $\tan \delta$ as a function of frequency at 25 °C, case sizes 1 to 7.

Equivalent series resistance (ESR)

Maximum ESR at 100 Hz and $T_{amb} = 25$ °C, measured
by means of a four-terminal circuit (Thomson Circuit)
($ESR = \tan \delta / \omega C$)

see Table 2

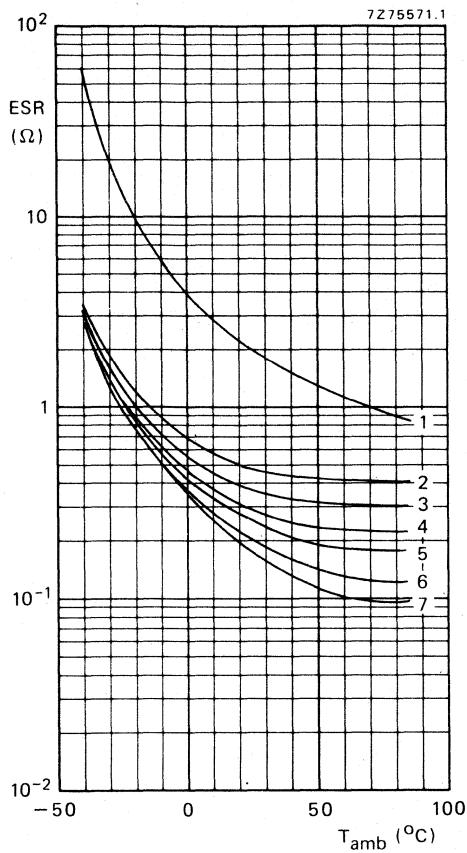


Fig. 17 Typical ESR as a function of ambient temperature at 100 Hz.

Case size 00:

- curve 1 = $68 \mu\text{F}$, 100 V;
- curve 2 = $150 \mu\text{F}$, 63 V;
- curve 3 = $220 \mu\text{F}$, 40 V;
- curve 4 = $470 \mu\text{F}$, 25 V;
- curve 5 = $680 \mu\text{F}$, 16 V;
- curve 6 = $1000 \mu\text{F}$, 10 V;
- curve 7 = $1500 \mu\text{F}$, 6,3 V.

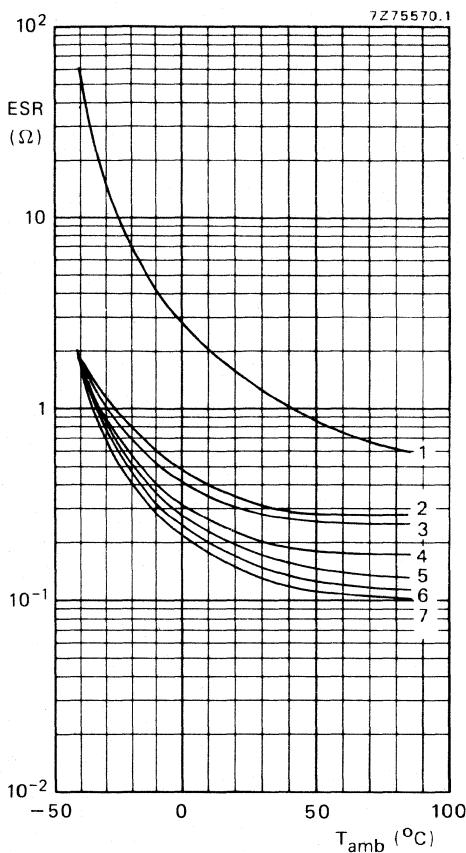


Fig. 18 Typical ESR as a function of ambient temperature at 100 Hz.

Case size 01:

- curve 1 = $100 \mu\text{F}$, 100 V;
- curve 2 = $220 \mu\text{F}$, 63 V;
- curve 3 = $330 \mu\text{F}$, 40 V;
- curve 4 = $470 \mu\text{F}$, 40 V;
- curve 5 = $680 \mu\text{F}$, 25 V;
- curve 6 = $1000 \mu\text{F}$, 16 V;
- curve 7 = $1500 \mu\text{F}$, 10 V and $2200 \mu\text{F}$, 6,3 V.

2222 030
 2222 031
 2222 032
 2222 033

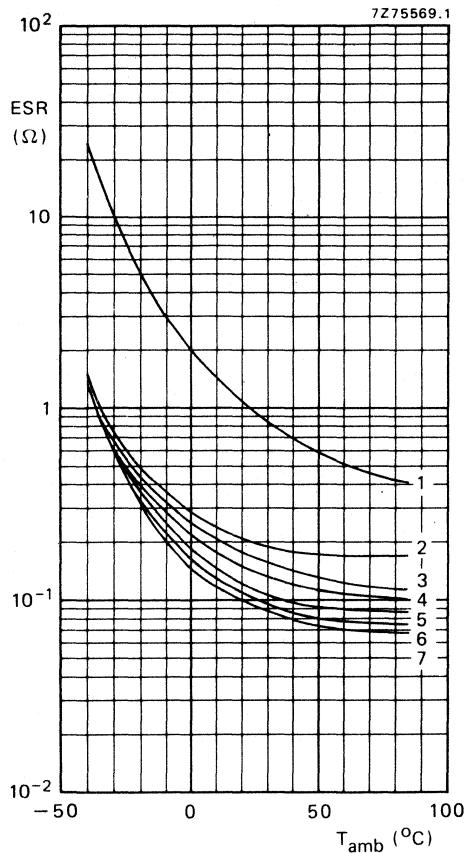


Fig. 19 Typical ESR as a function of ambient temperature at 100 Hz.

Case size 02:

- curve 1 = $150 \mu\text{F}$, 100 V;
- curve 2 = $330 \mu\text{F}$, 63 V;
- curve 3 = $470 \mu\text{F}$, 63 V;
- curve 4 = $680 \mu\text{F}$, 40 V;
- curve 5 = $1000 \mu\text{F}$, 25 V;
- curve 6 = $1500 \mu\text{F}$, 16 V;
- curve 7 = $2200 \mu\text{F}$, 10 V and $3300 \mu\text{F}$, 6,3 V.

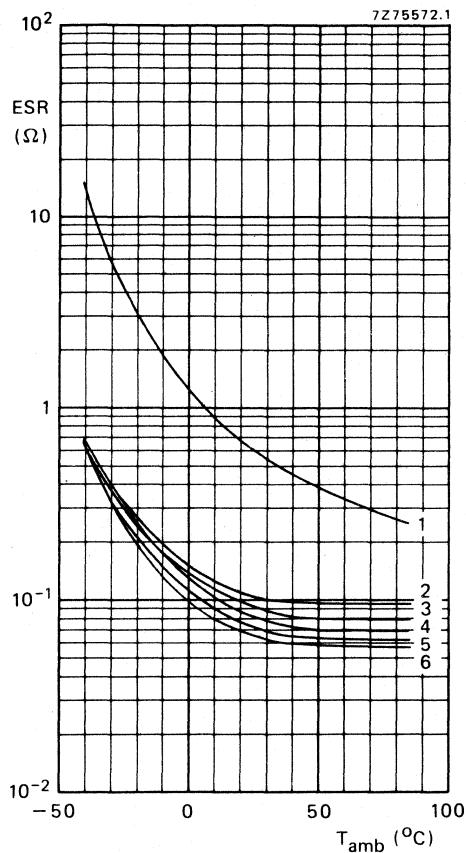


Fig. 20 Typical ESR as a function of ambient temperature at 100 Hz.

Case size 03:

- curve 1 = $220 \mu\text{F}$, 100 V;
- curve 2 = $680 \mu\text{F}$, 63 V;
- curve 3 = $1000 \mu\text{F}$, 40 V;
- curve 4 = $1500 \mu\text{F}$, 25 V;
- curve 5 = $2200 \mu\text{F}$, 16 V;
- curve 6 = $3300 \mu\text{F}$, 10 V and $4700 \mu\text{F}$, 6,3 V.

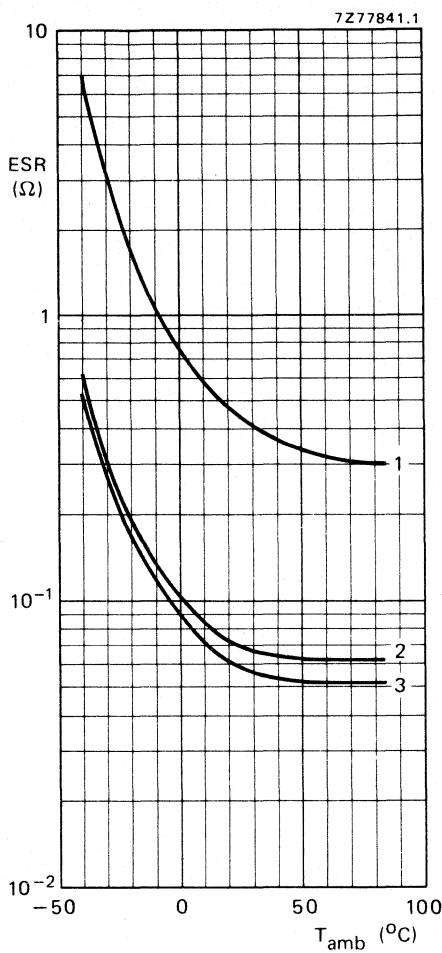


Fig. 21 Typical ESR as a function of ambient temperature at 100 Hz.

Case size 04:

curve 1 = $330 \mu\text{F}$, 100 V;
 curve 2 = $1500 \mu\text{F}$, 40 V and $2200 \mu\text{F}$, 25 V;
 curve 3 = $3300 \mu\text{F}$, 16 V, $4700 \mu\text{F}$, 10 V and
 $6800 \mu\text{F}$, 6,3 V.

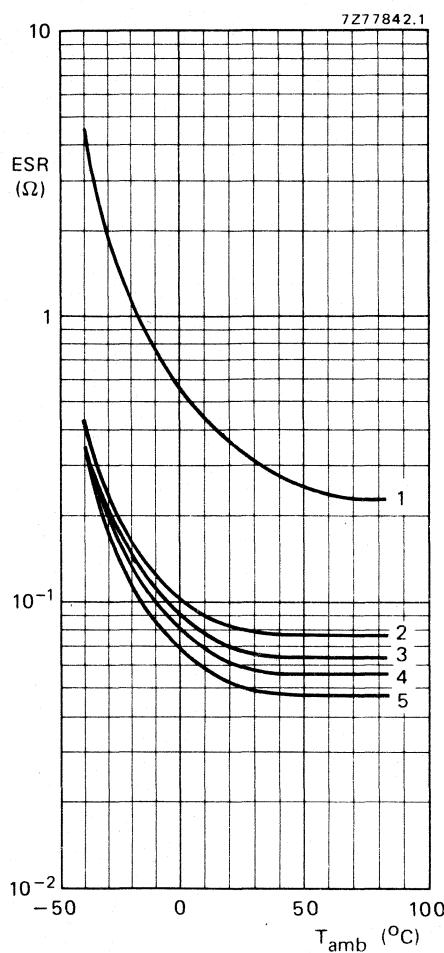


Fig. 22 Typical ESR as a function of ambient temperature at 100 Hz.

case size 05:

curve 1 = $470 \mu\text{F}$, 100 V and $680 \mu\text{F}$, 100 V;
 curve 2 = $1000 \mu\text{F}$, 63 V;
 curve 3 = $1500 \mu\text{F}$, 63 V;
 curve 4 = $2200 \mu\text{F}$, 40 V and $3300 \mu\text{F}$, 25 V;
 curve 5 = $4700 \mu\text{F}$, 16 V, $6800 \mu\text{F}$, 10 V,
 $10\ 000 \mu\text{F}$, 6,3 V and $15\ 000 \mu\text{F}$,
 $6,3 \text{ V}$.

2222 030
2222 031
2222 032
2222 033

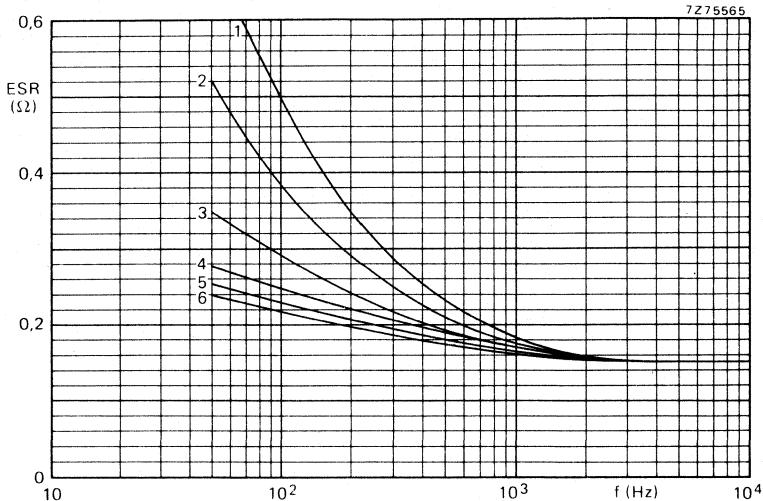


Fig. 23 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 00:

curve 1 = 150 μ F, 63 V; curve 3 = 470 μ F, 25 V; curve 5 = 1000 μ F, 10 V;
curve 2 = 220 μ F, 40 V; curve 4 = 680 μ F, 16 V; curve 6 = 1500 μ F, 6,3 V.

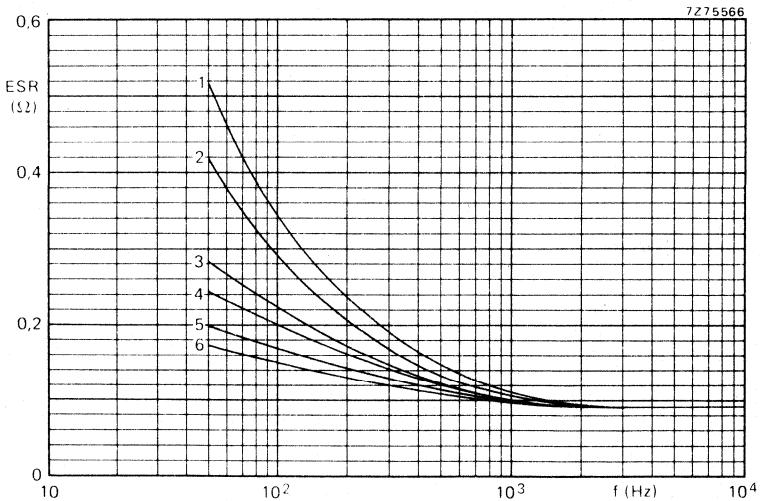


Fig. 24 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 01:

curve 1 = 220 μ F, 63 V; curve 3 = 470 μ F, 40 V; curve 5 = 1000 μ F, 16 V;
curve 2 = 330 μ F, 40 V; curve 4 = 680 μ F, 25 V; curve 6 = 1500 μ F, 10 V;
and 2200 μ F, 6,3 V.

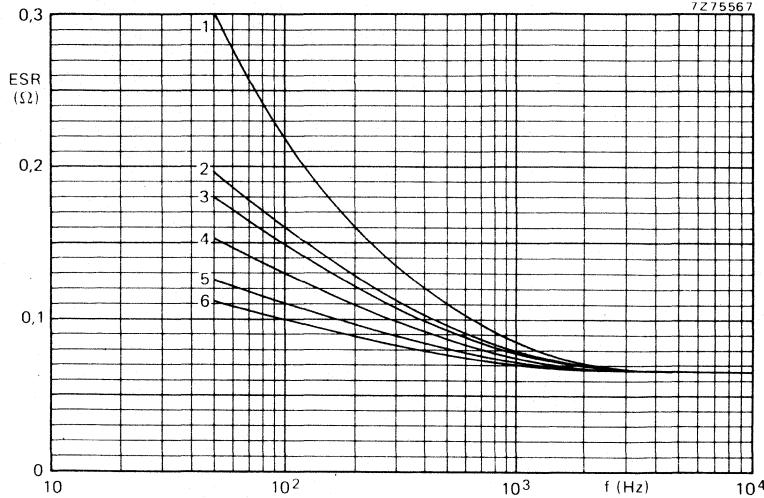


Fig. 25 Typical ESR as a function of frequency at 25 °C, 6,3 to 63 V versions, case size 02:

curve 1 = 330 μ F, 63 V; curve 3 = 680 μ F, 40 V; curve 5 = 1500 μ F, 16 V;
 curve 2 = 470 μ F, 63 V; curve 4 = 1000 μ F, 25 V; curve 6 = 2200 μ F, 10 V;
 and 3300 μ F, 6,3 V.

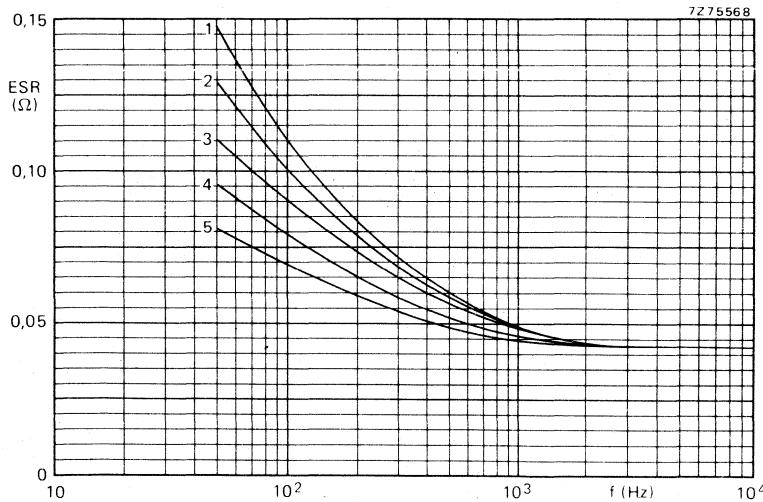


Fig. 26 Typical ESR as a function of frequency at 25 °C, 6,3 to 63 V versions, case size 03:

curve 1 = 680 μ F, 63 V; curve 3 = 1500 μ F, 25 V; curve 5 = 3300 μ F, 10 V;
 curve 2 = 1000 μ F, 40 V; curve 4 = 2200 μ F, 16 V; and 4700 μ F, 6,3 V.

2222 030
2222 031
2222 032
2222 033

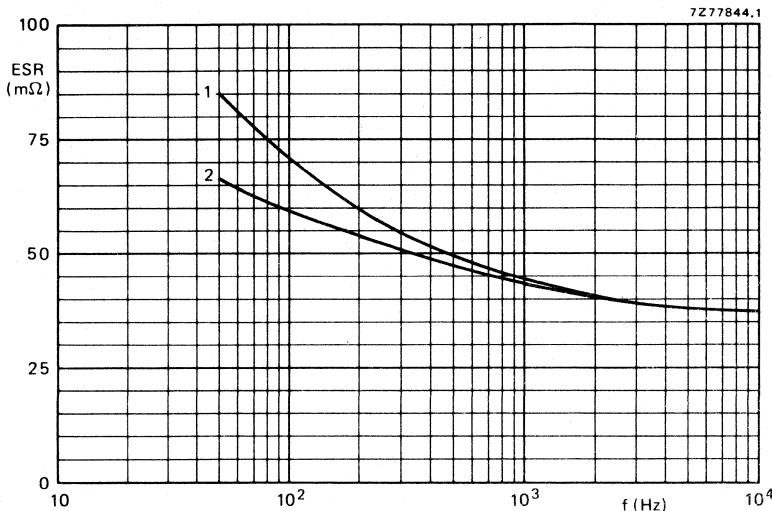


Fig. 27 Typical ESR as a function of frequency at 25 °C. Case size 04: curve 1 = 1500 µF, 40 V and 2200 µF, 25 V; curve 2 = 3300 µF, 16 V, 4700 µF, 10 V and 6800 µF, 6,3 V.

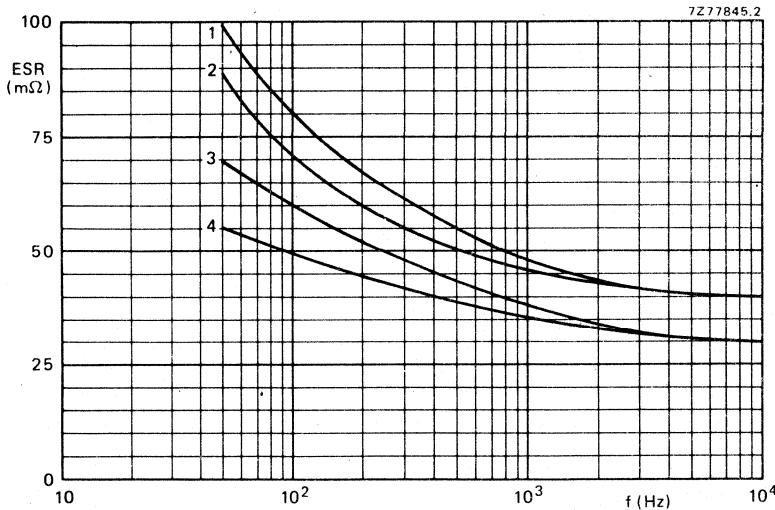


Fig. 28 Typical ESR as a function of frequency at 25 °C. Case size 05: curve 1 = 1000 µF, 63 V; curve 2 = 1500 µF, 63 V; curve 3 = 2200 µF, 40 V and 3300 µF, 25 V; curve 4 = 4700 µF, 16 V, 6800 µF, 10 V, 10 000 µF and 15 000 µF, 6,3 V.

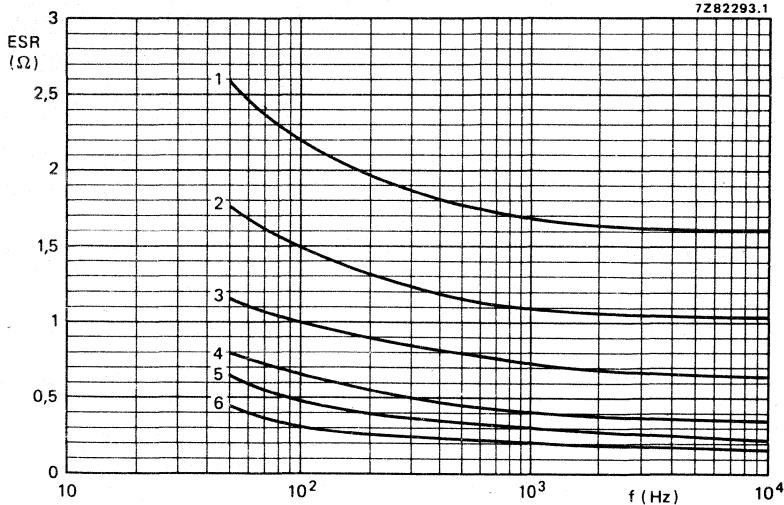


Fig. 29 Typical ESR as a function of frequency at 25 °C, 100 V version:

- curve 1 = 68 µF, case size 00;
- curve 2 = 100 µF, case size 01;
- curve 3 = 150 µF, case size 02;
- curve 4 = 220 µF, case size 03;
- curve 5 = 330 µF, case size 04;
- curve 6 = 470 µF and 680 µF, case size 05.

Impedance (Z)

Maximum impedance at $T_{amb} = 20$ °C and 1 kHz or 10 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

 $z = Z \times C_{nom}$, at 10 kHz

see Table 3

 $z = Z \times C_{nom}$, at 1 kHz

see Table 4

Table 3

T_{amb}	$z = Z \times C_{nom}$ ($\Omega \mu F$) at U_R ; at 10 kHz						
	6,3 V	10 V	16 V	25 V	40 V	63 V	100 V
+ 20 °C	≤ 200	≤ 160	≤ 120	≤ 90	≤ 70	≤ 55	≤ 45
- 25 °C	≤ 1200	≤ 750	≤ 560	≤ 400	≤ 300	≤ 180	≤ 130
- 40 °C	≤ 3200	≤ 2000	≤ 1500	≤ 1100	≤ 900	≤ 500	≤ 350

Table 4

T_{amb}	$z = Z \times C_{nom}$ ($\Omega \mu F$) at U_R ; at 1 kHz						
	6,3 V	10 V	16 V	25 V	40 V	63 V	100 V
+ 20 °C	≤ 350	≤ 300	≤ 250	≤ 220	≤ 200	≤ 180	≤ 175
- 25 °C	≤ 1700	≤ 1100	≤ 800	≤ 570	≤ 430	≤ 330	≤ 300
- 40 °C	≤ 4500	≤ 2800	≤ 2000	≤ 1400	≤ 1100	≤ 800	—

2222 030
2222 031
2222 032
2222 033

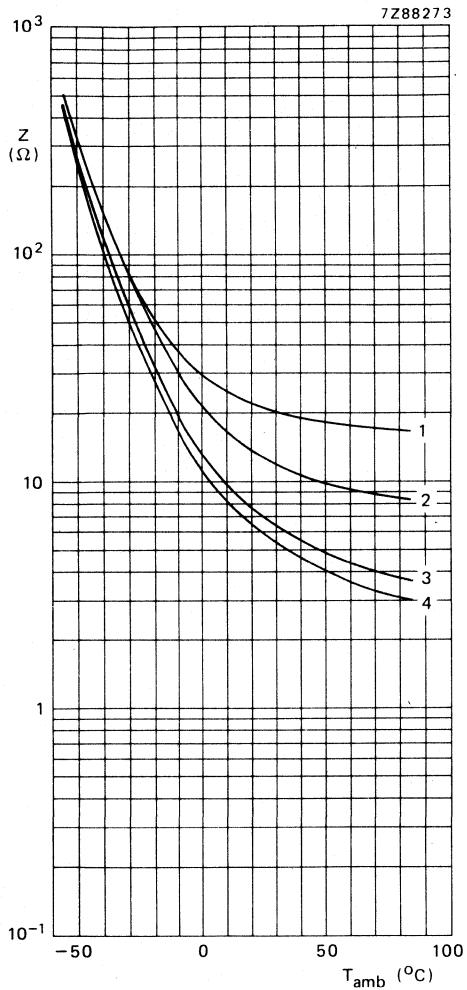


Fig. 30 Typical impedance as a function of ambient temperature at 10 kHz; case size 1:

- curve 1 = 1 μF , 63 V;
- curve 2 = 2,2 μF , 40 V;
- curve 3 = 4,7 μF , 16 V;
- curve 4 = 10 μF , 6,3 V.

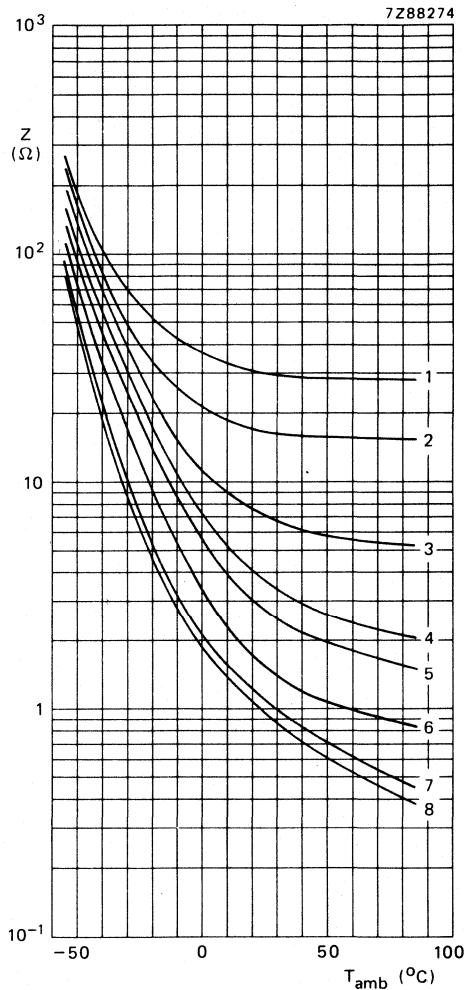


Fig. 31 Typical impedance as a function of ambient temperature at 10 kHz; case size 2:

- curve 1 = 0,47 μF , 63 V;
- curve 2 = 1 μF , 63 V;
- curve 3 = 3,3 μF , 63 V;
- curve 4 = 6,8 μF , 63 V;
- curve 5 = 10 μF , 25 V;
- curve 6 = 22 μF , 25 V;
- curve 7 = 47 μF , 10 V;
- curve 8 = 68 μF , 6,3 V.

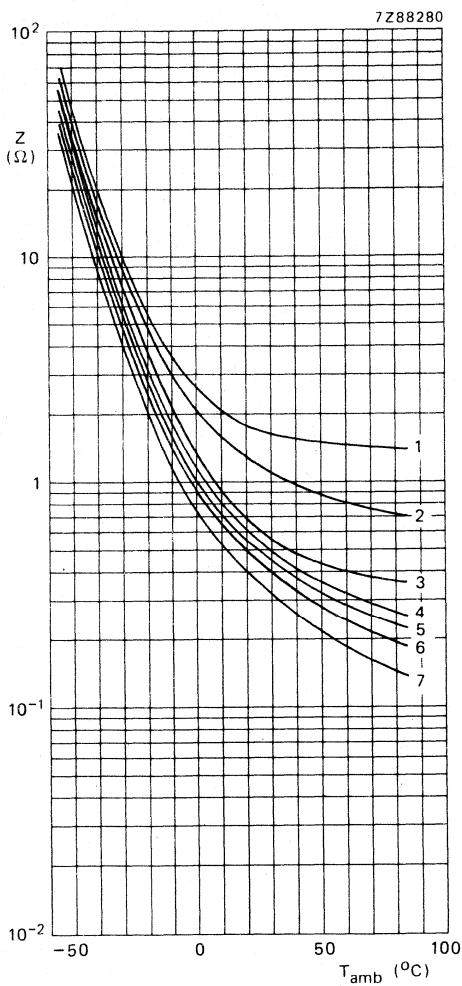


Fig. 32 Typical impedance as a function of ambient temperature at 10 kHz; case size 3:

- curve 1 = $4.7 \mu\text{F}, 100 \text{ V};$
- curve 2 = $10 \mu\text{F}, 63 \text{ V};$
- curve 3 = $22 \mu\text{F}, 40 \text{ V};$
- curve 4 = $47 \mu\text{F}, 25 \text{ V};$
- curve 5 = $68 \mu\text{F}, 16 \text{ V};$
- curve 6 = $100 \mu\text{F}, 10 \text{ V};$
- curve 7 = $150 \mu\text{F}, 6.3 \text{ V}.$

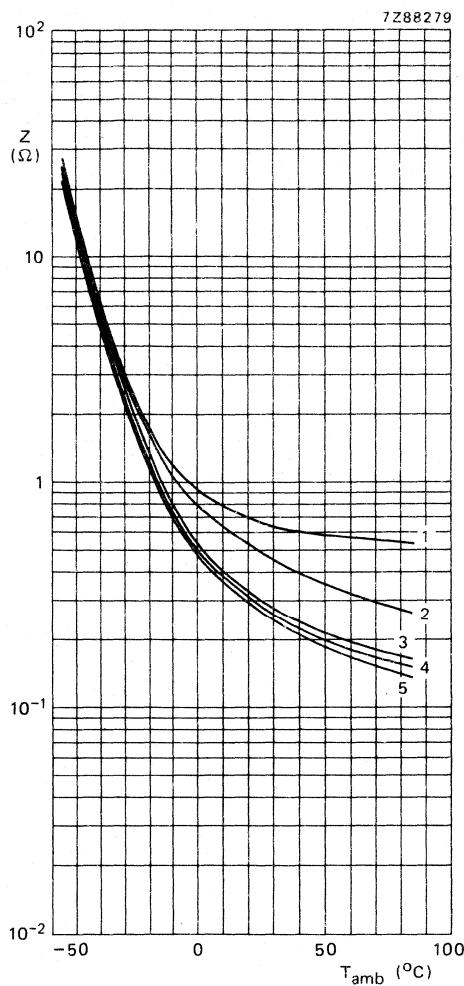


Fig. 33 Typical impedance as a function of ambient temperature at 10 kHz; case size 5a:

- curve 1 = $22 \mu\text{F}, 63 \text{ V};$
- curve 2 = $47 \mu\text{F}, 40 \text{ V};$
- curve 3 = $100 \mu\text{F}, 25 \text{ V};$
- curve 4 = $150 \mu\text{F}, 16 \text{ V};$
- curve 5 = $220 \mu\text{F}, 10 \text{ V}.$

2222 030
2222 031
2222 032
2222 033

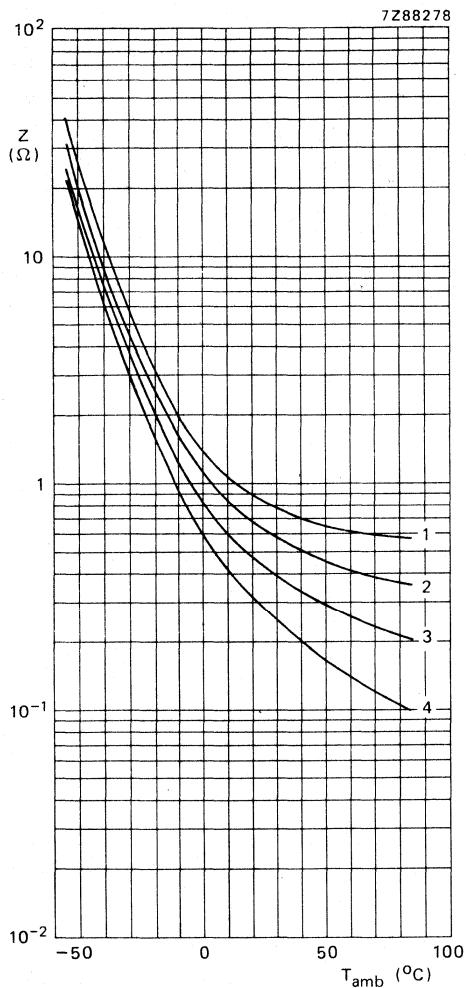


Fig. 34 Typical impedance as a function of ambient temperature at 10 kHz; case size 4:

- curve 1 = 22 μF , 63 V;
- curve 2 = 47 μF , 40 V;
- curve 3 = 100 μF , 25 V;
- curve 4 = 220 μF , 10 V.

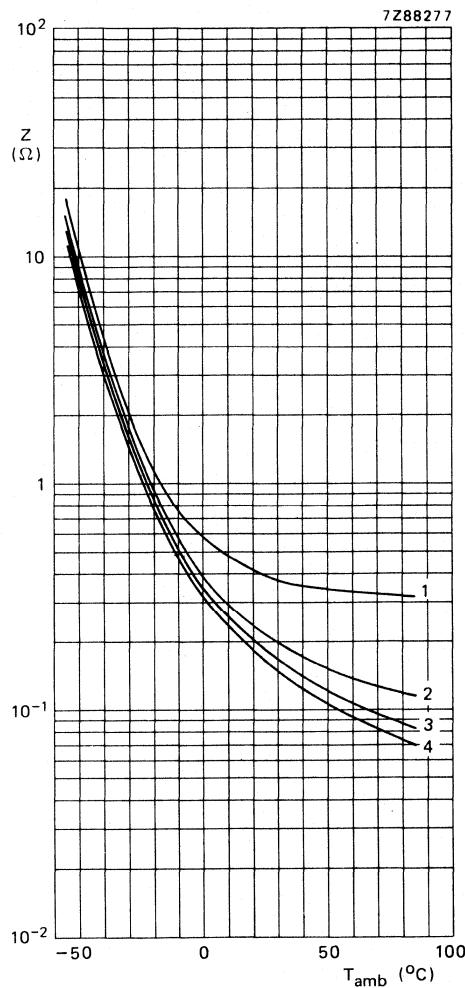


Fig. 35 Typical impedance as a function of ambient temperature at 10 kHz; case size 5:

- curve 1 = 47 μF , 63 V;
- curve 2 = 150 μF , 25 V;
- curve 3 = 330 μF , 10 V;
- curve 4 = 470 μF , 6,3 V.

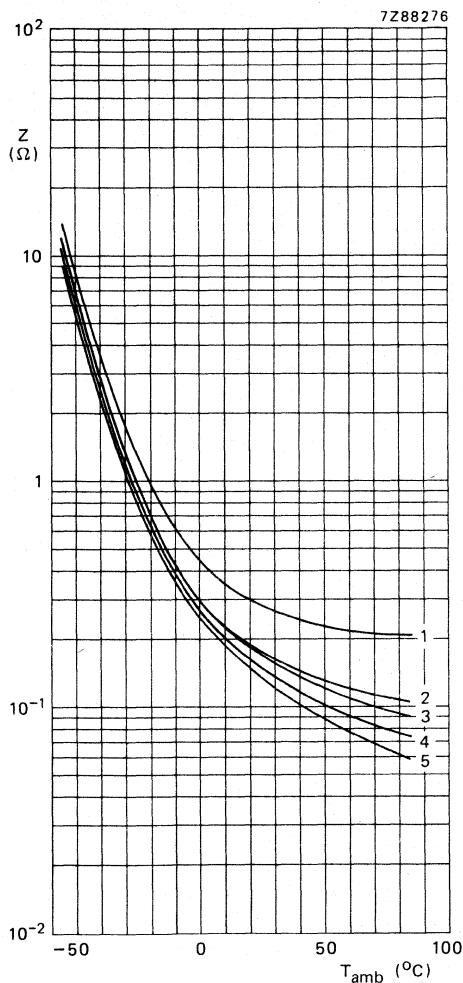


Fig. 36 Typical impedance as a function of ambient temperature at 10 kHz; case size 6:

- curve 1 = $68 \mu\text{F}, 63 \text{ V};$
- curve 2 = $150 \mu\text{F}, 40 \text{ V};$
- curve 3 = $220 \mu\text{F}, 25 \text{ V};$
- curve 4 = $330 \mu\text{F}, 16 \text{ V};$
- curve 5 = $680 \mu\text{F}, 6,3 \text{ V}.$

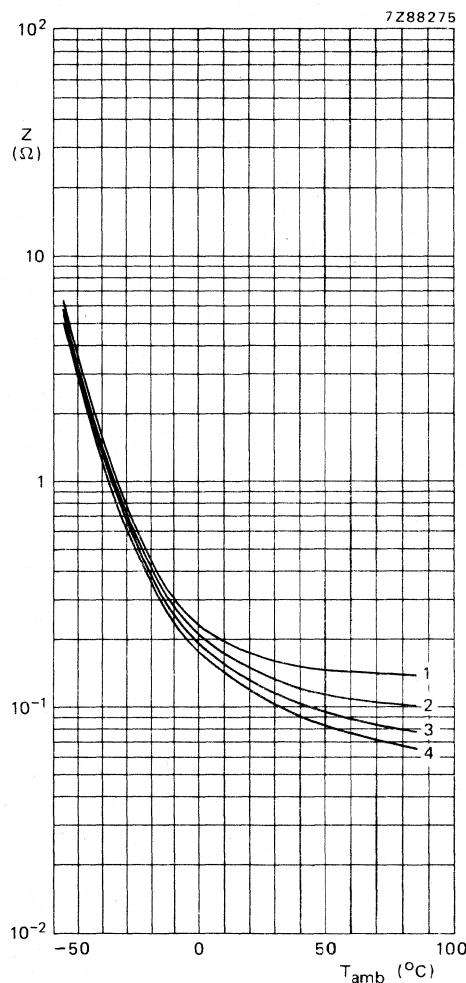


Fig. 37 Typical impedance as a function of ambient temperature at 10 kHz; case size 7:

- curve 1 = $100 \mu\text{F}, 63 \text{ V};$
- curve 2 = $220 \mu\text{F}, 40 \text{ V};$
- curve 3 = $470 \mu\text{F}, 16 \text{ V};$
- curve 4 = $1000 \mu\text{F}, 6,3 \text{ V}.$

2222 030
2222 031
2222 032
2222 033

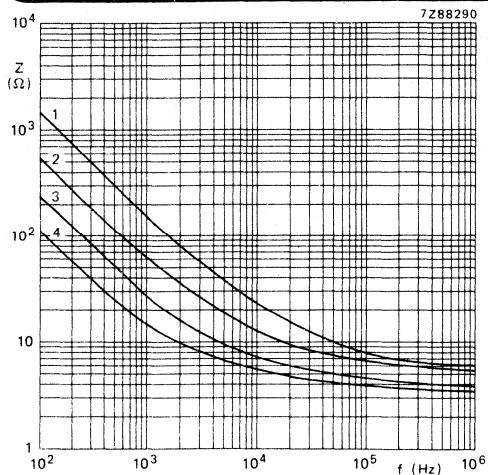


Fig. 38 Typical impedance as a function of frequency at $T_{amb} = 20^\circ C$; case size 1:
curve 1 = $1 \mu F$, 63 V; curve 3 = $4,7 \mu F$, 16 V;
curve 2 = $2,2 \mu F$, 40 V; curve 4 = $10 \mu F$, 6,3 V.

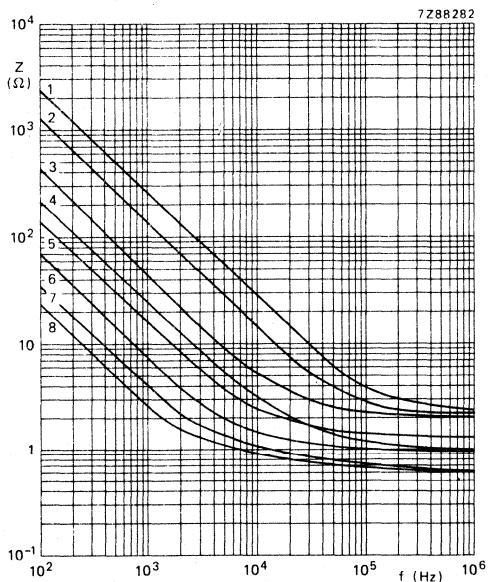


Fig. 39 Typical impedance as a function of frequency at $T_{amb} = 20^\circ C$; case size 2:
curve 1 = $0,47 \mu F$, 63 V; curve 5 = $10 \mu F$, 25 V;
curve 2 = $1 \mu F$, 63 V/100 V; curve 6 = $22 \mu F$, 25 V;
curve 3 = $3,3 \mu F$, 63 V/100 V; curve 7 = $47 \mu F$, 10 V;
curve 4 = $6,8 \mu F$, 63 V; curve 8 = $68 \mu F$, 6,3 V.

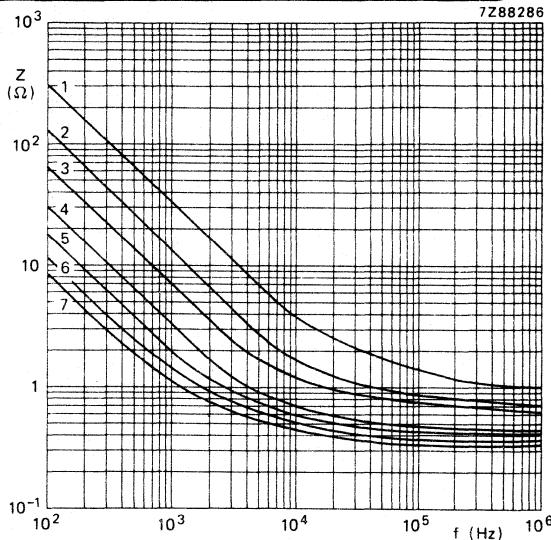


Fig. 40 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 3:
 curve 1 = $4.7 \mu F$, 100 V;
 curve 2 = $10 \mu F$, 63 V;
 curve 3 = $22 \mu F$, 40 V;
 curve 4 = $47 \mu F$, 25 V;
 curve 5 = $68 \mu F$, 16 V;
 curve 6 = $100 \mu F$, 10 V;
 curve 7 = $150 \mu F$, 6.3 V.

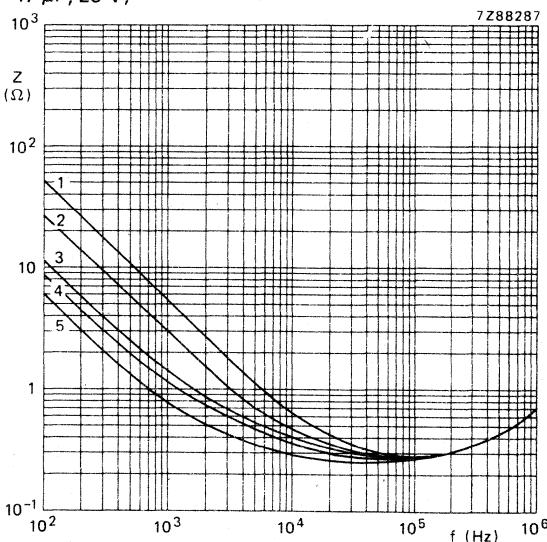


Fig. 41 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 5a:
 curve 1 = $22 \mu F$, 63 V;
 curve 2 = $47 \mu F$, 40 V;
 curve 3 = $100 \mu F$, 25 V;
 curve 4 = $150 \mu F$, 16 V;
 curve 5 = $220 \mu F$, 10 V.

2222 030
2222 031
2222 032
2222 033

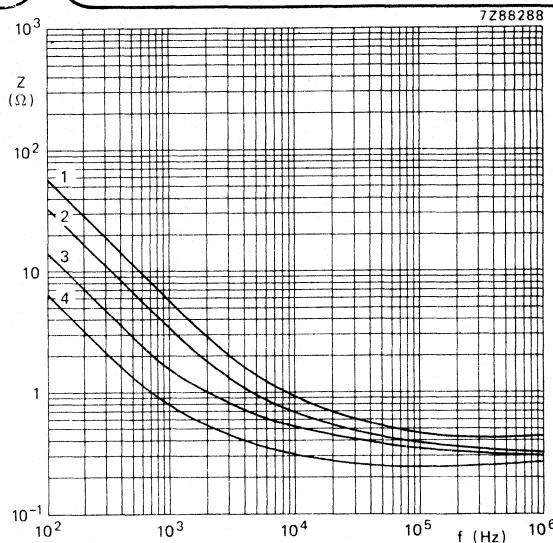


Fig. 42 Typical impedance as a function of frequency at $T_{amb} = 20^\circ C$; case size 4:
curve 1 = $22 \mu F$, 63 V;
curve 2 = $47 \mu F$, 40 V;
curve 3 = $100 \mu F$, 25 V;
curve 4 = $220 \mu F$, 10 V.

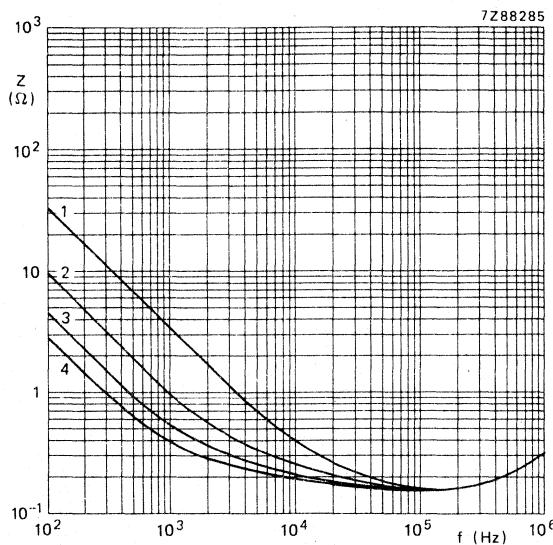


Fig. 43 Typical impedance as a function of frequency at $T_{amb} = 20^\circ C$; case size 5:
curve 1 = $47 \mu F$, 63 V;
curve 2 = $150 \mu F$, 25 V;
curve 3 = $330 \mu F$, 10 V;
curve 4 = $470 \mu F$, 6.3 V.

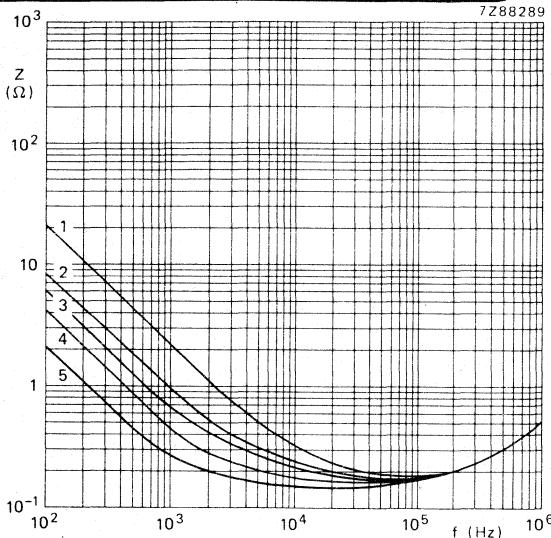


Fig. 44 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 6:
 curve 1 = 68 μF , 63 V; curve 4 = 330 μF , 16 V;
 curve 2 = 150 μF , 40 V; curve 5 = 680 μF , 6.3 V.
 curve 3 = 220 μF , 25 V;

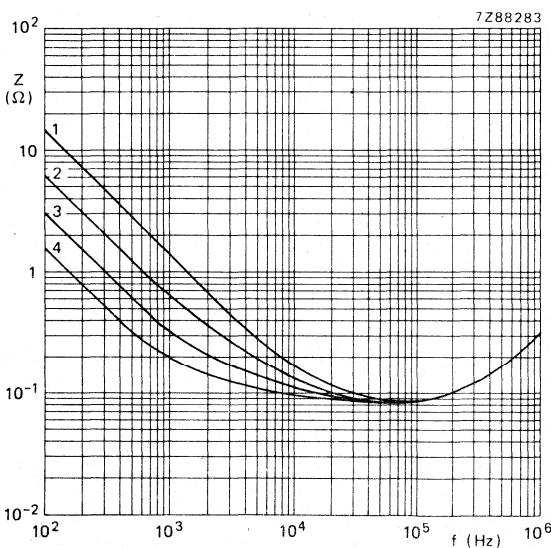


Fig. 45 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 7:
 curve 1 = 100 μF , 63 V; curve 3 = 470 μF , 16 V;
 curve 2 = 220 μF , 40 V; curve 4 = 1000 μF , 6.3 V.

2222 030
2222 031
2222 032
2222 033

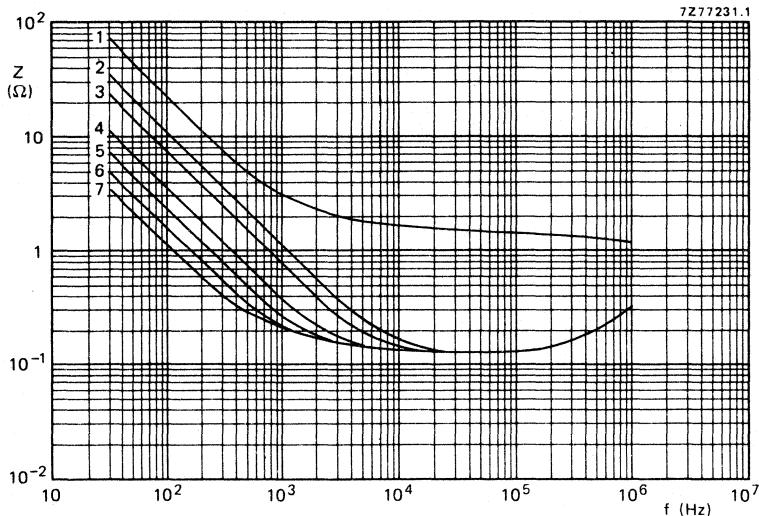


Fig. 46 Typical impedance as a function of frequency at 20 °C. Case size 00:
curve 1 = 68 μ F, 100 V; curve 4 = 470 μ F, 25 V; curve 6 = 1000 μ F, 10 V;
curve 2 = 150 μ F, 63 V; curve 5 = 680 μ F, 16 V; curve 7 = 1500 μ F, 6,3 V.
curve 3 = 220 μ F, 40 V;

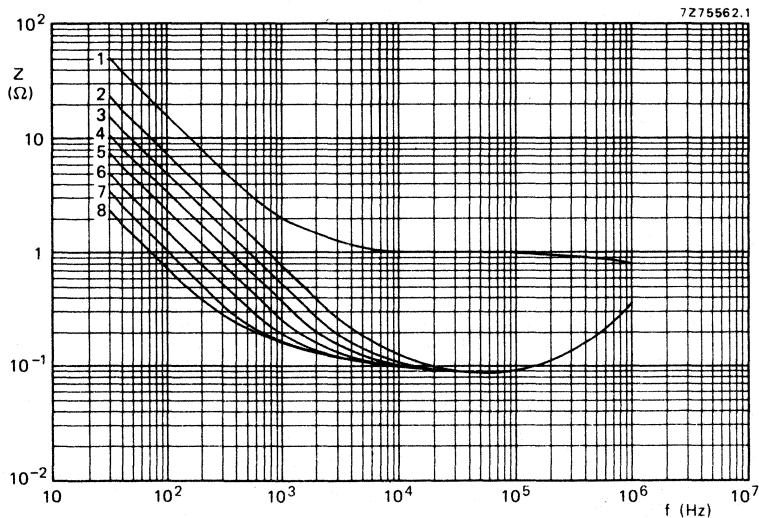


Fig. 47 Typical impedance as a function of frequency at 20 °C. Case size 01:
curve 1 = 100 μ F, 100 V; curve 4 = 470 μ F, 40 V; curve 6 = 1000 μ F, 16 V;
curve 2 = 220 μ F, 63 V; curve 5 = 680 μ F, 25 V; curve 7 = 1500 μ F, 10 V;
curve 3 = 330 μ F, 40 V; curve 8 = 2200 μ F, 6,3 V.

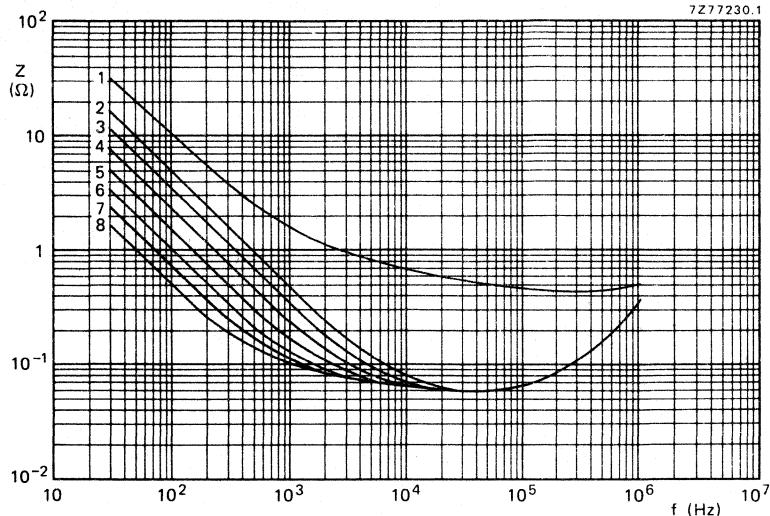


Fig. 48 Typical impedance as a function of frequency at 20 °C. Case size 02:

curve 1 = 150 μ F, 100 V;	curve 4 = 680 μ F, 40 V;	curve 6 = 1500 μ F, 16 V;
curve 2 = 330 μ F, 63 V;	curve 5 = 1000 μ F, 25 V;	curve 7 = 2200 μ F, 10 V;
curve 3 = 470 μ F, 63 V;		curve 8 = 3300 μ F, 6,3 V.

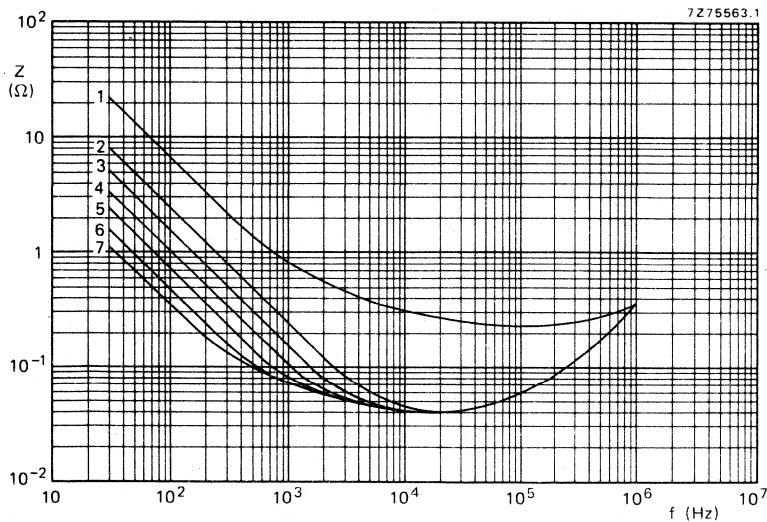


Fig. 49 Typical impedance as a function of frequency at 20 °C. Case size 03:

curve 1 = 220 μ F, 100 V;	curve 4 = 1500 μ F, 25 V;	curve 6 = 3300 μ F, 10 V;
curve 2 = 680 μ F, 63 V;	curve 5 = 2200 μ F, 16 V;	curve 7 = 4700 μ F, 6,3 V.
curve 3 = 1000 μ F, 40 V;		

2222 030
2222 031
2222 032
2222 033

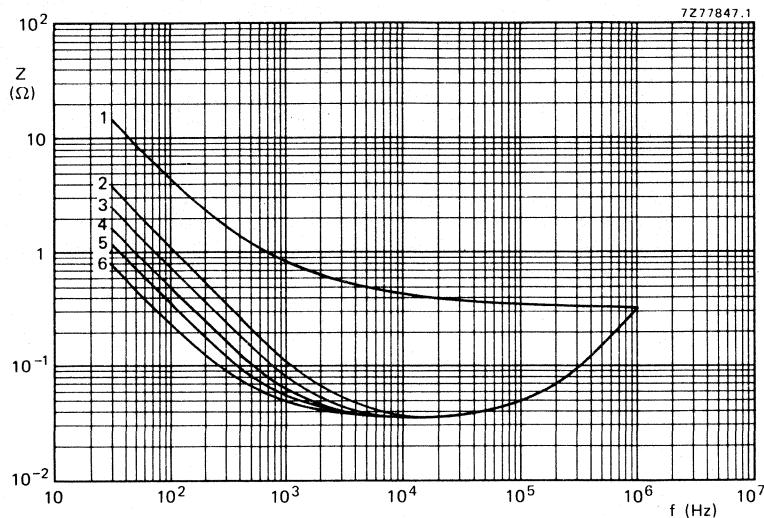


Fig. 50 Typical impedance as a function of frequency at 20 °C. Case size 04:
 curve 1 = 330 μ F, 100 V; curve 3 = 2200 μ F, 25 V; curve 5 = 4700 μ F, 10 V;
 curve 2 = 1500 μ F, 40 V; curve 4 = 3300 μ F, 16 V; curve 6 = 6800 μ F, 6,3 V.

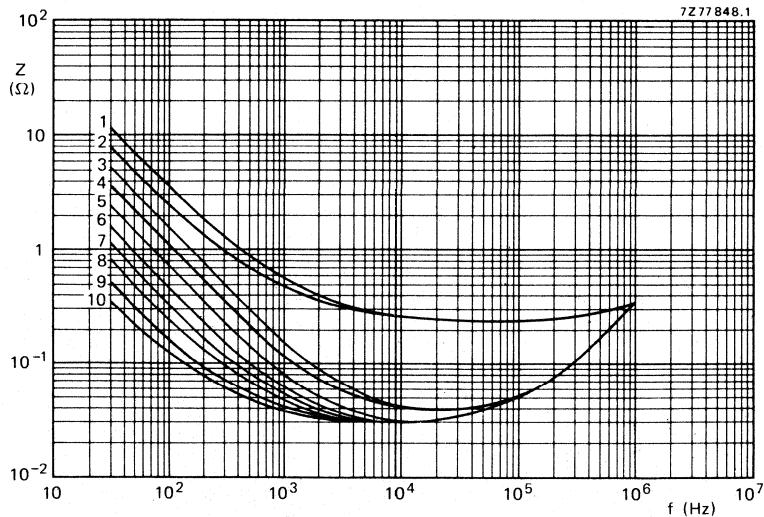


Fig. 51 Typical impedance as a function of frequency at 20 °C. Case size 05:
 curve 1 = 470 μ F, 100 V; curve 4 = 1500 μ F, 63 V; curve 7 = 4700 μ F, 16 V;
 curve 2 = 680 μ F, 100 V; curve 5 = 2200 μ F, 40 V; curve 8 = 6800 μ F, 10 V;
 curve 3 = 1000 μ F, 63 V; curve 6 = 3300 μ F, 25 V; curve 9 = 10 000 μ F, 6,3 V;
 curve 10 = 15 000 μ F, 6,3 V;

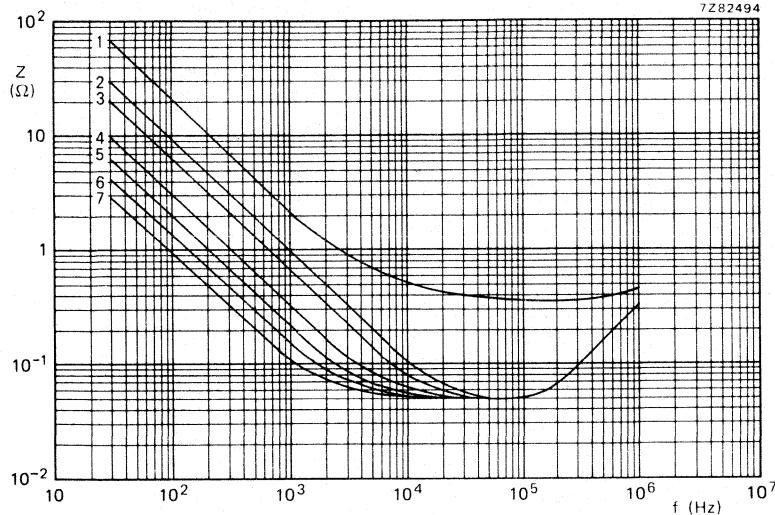


Fig. 52 Typical impedance as a function of frequency at 85 °C. Case size 00:
 curve 1 = $68 \mu\text{F}$, 100 V; curve 4 = $470 \mu\text{F}$, 25 V; curve 6 = $1000 \mu\text{F}$, 10 V;
 curve 2 = $150 \mu\text{F}$, 63 V; curve 5 = $680 \mu\text{F}$, 16 V; curve 7 = $1500 \mu\text{F}$, 6,3 V.
 curve 3 = $220 \mu\text{F}$, 40 V;

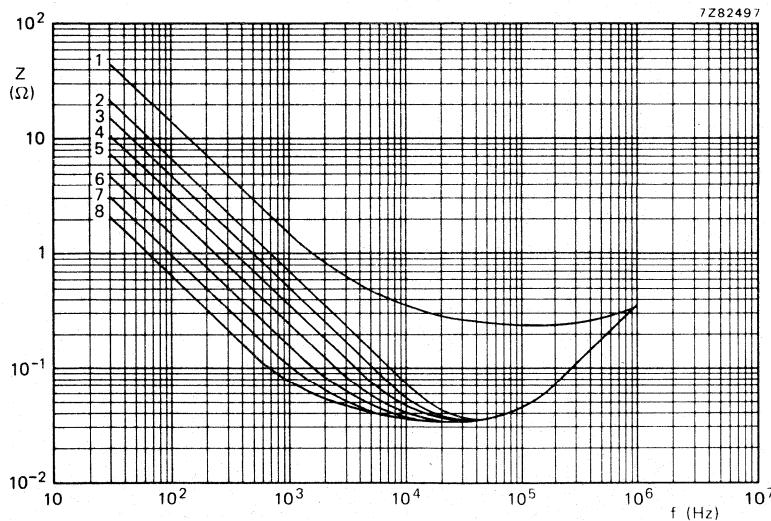


Fig. 53 Typical impedance as a function of frequency at 85 °C. Case size 01:
 curve 1 = $100 \mu\text{F}$, 100 V; curve 4 = $470 \mu\text{F}$, 40 V; curve 6 = $1000 \mu\text{F}$, 16 V;
 curve 2 = $220 \mu\text{F}$, 63 V; curve 5 = $680 \mu\text{F}$, 25 V; curve 7 = $1500 \mu\text{F}$, 10 V;
 curve 3 = $330 \mu\text{F}$, 40 V; curve 8 = $2200 \mu\text{F}$, 6,3 V.

2222 030
2222 031
2222 032
2222 033

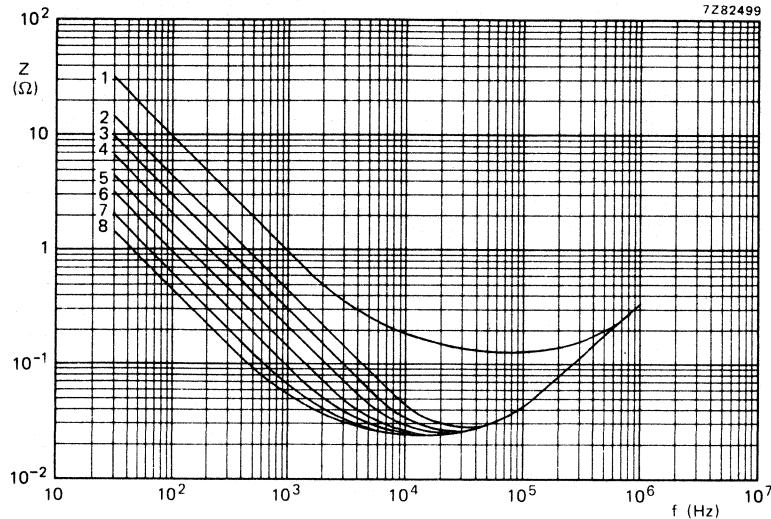


Fig. 54 Typical impedance as a function of frequency at 85 °C. Case size 02:

- | | | |
|--------------------------------------|--------------------------------------|---------------------------------------|
| curve 1 = $150 \mu\text{F}$, 100 V; | curve 4 = $680 \mu\text{F}$, 40 V; | curve 6 = $1500 \mu\text{F}$, 16 V; |
| curve 2 = $330 \mu\text{F}$, 63 V; | curve 5 = $1000 \mu\text{F}$, 25 V; | curve 7 = $2200 \mu\text{F}$, 10 V; |
| curve 3 = $470 \mu\text{F}$, 63 V; | | curve 8 = $3300 \mu\text{F}$, 6,3 V. |

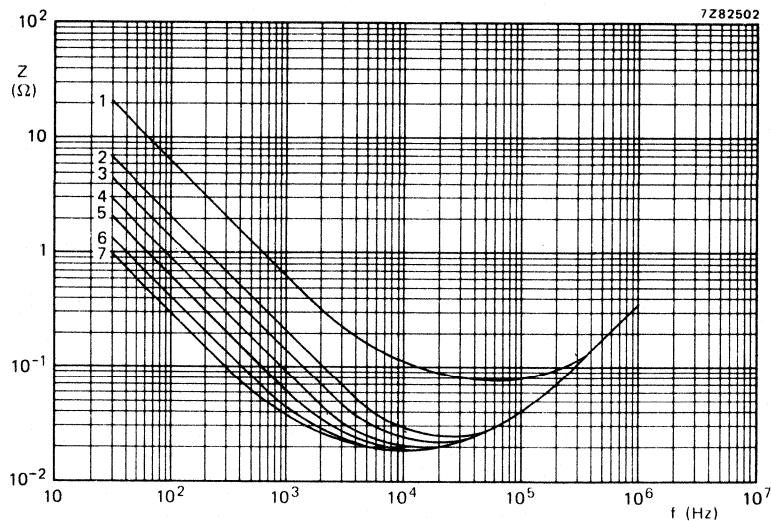
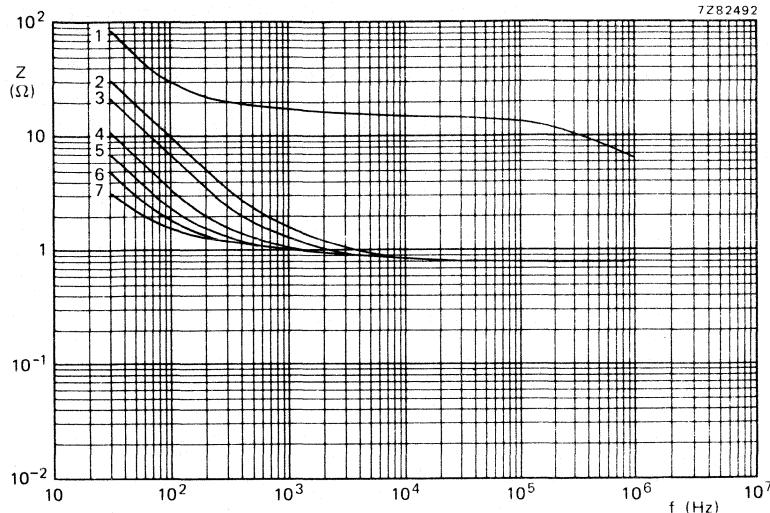
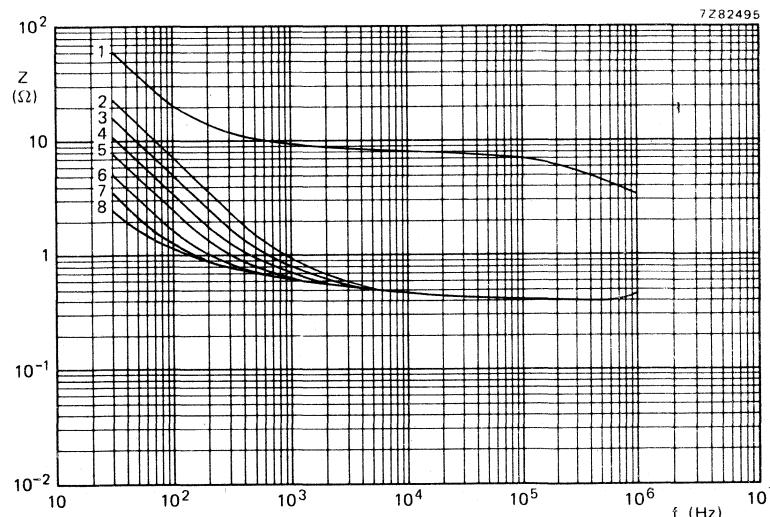


Fig. 55 Typical impedance as a function of frequency at 85 °C. Case size 03:

- | | | |
|--------------------------------------|--------------------------------------|---------------------------------------|
| curve 1 = $220 \mu\text{F}$, 100 V; | curve 4 = $1500 \mu\text{F}$, 25 V; | curve 6 = $3300 \mu\text{F}$, 10 V; |
| curve 2 = $680 \mu\text{F}$, 63 V; | curve 5 = $2200 \mu\text{F}$, 16 V; | curve 7 = $4700 \mu\text{F}$, 6,3 V. |
| curve 3 = $1000 \mu\text{F}$, 40 V; | | |

Fig. 56 Typical impedance as a function of frequency at -25°C . Case size 00:

curve 1 = 68 μF , 100 V; curve 4 = 470 μF , 25 V; curve 6 = 1000 μF , 10 V;
 curve 2 = 150 μF , 63 V; curve 5 = 680 μF , 16 V; curve 7 = 1500 μF , 6,3 V.
 curve 3 = 220 μF , 40 V;

Fig. 57 Typical impedance as a function of frequency at -25°C . Case size 01:

curve 1 = 100 μF , 100 V; curve 4 = 470 μF , 40 V; curve 6 = 1000 μF , 16 V;
 curve 2 = 220 μF , 63 V; curve 5 = 680 μF , 25 V; curve 7 = 1500 μF , 10 V;
 curve 3 = 330 μF , 40 V; curve 8 = 2200 μF , 6,3 V.

2222 030
2222 031
2222 032
2222 033

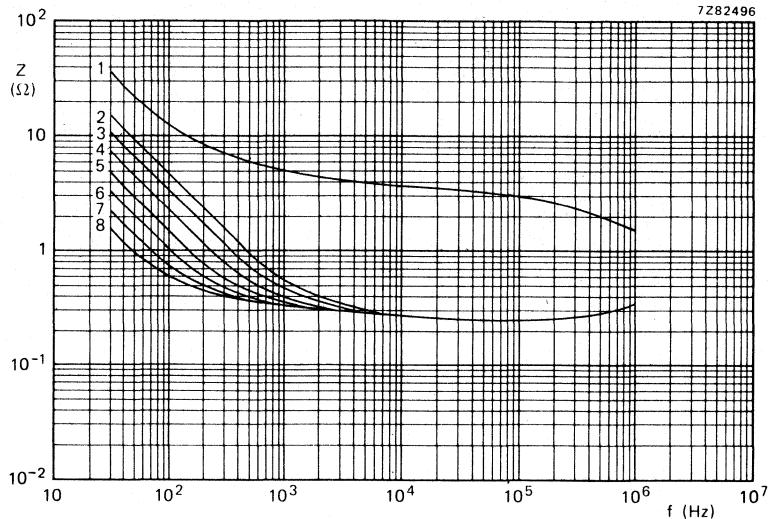


Fig. 58 Typical impedance as a function of frequency at -25°C . Case size 02:

- curve 1 = $150 \mu\text{F}, 100 \text{ V};$ curve 4 = $680 \mu\text{F}, 40 \text{ V};$ curve 6 = $1500 \mu\text{F}, 16 \text{ V};$
curve 2 = $330 \mu\text{F}, 63 \text{ V};$ curve 5 = $1000 \mu\text{F}, 25 \text{ V};$ curve 7 = $2200 \mu\text{F}, 10 \text{ V};$
curve 3 = $470 \mu\text{F}, 63 \text{ V};$ curve 8 = $3300 \mu\text{F}, 6.3 \text{ V}.$

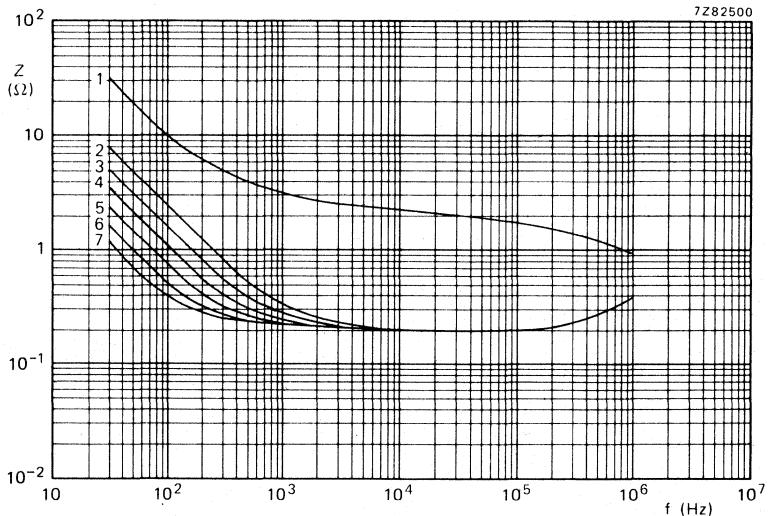


Fig. 59 Typical impedance as a function of frequency at -25°C . Case size 03:

- curve 1 = $220 \mu\text{F}, 100 \text{ V};$ curve 4 = $1500 \mu\text{F}, 25 \text{ V};$ curve 6 = $3300 \mu\text{F}, 10 \text{ V};$
curve 2 = $680 \mu\text{F}, 63 \text{ V};$ curve 5 = $2200 \mu\text{F}, 16 \text{ V};$ curve 7 = $4700 \mu\text{F}, 6.3 \text{ V}.$

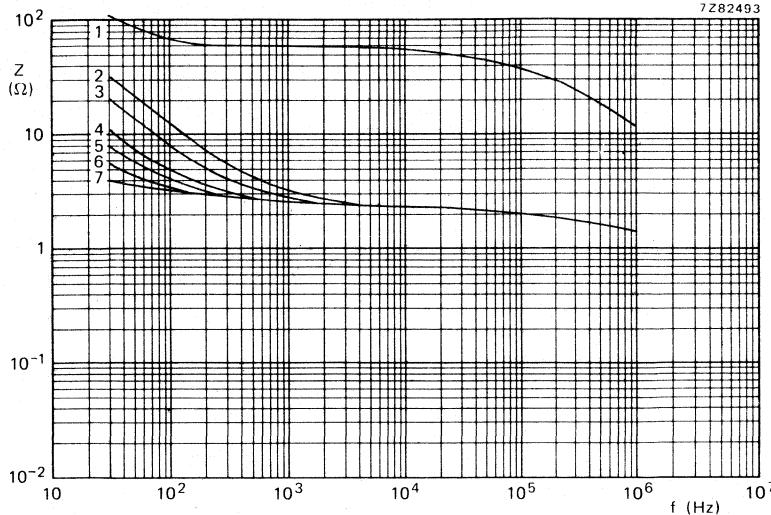


Fig. 60 Typical impedance as a function of frequency at -40 $^{\circ}$ C. Case size 00:
 curve 1 = 68 μ F, 100 V; curve 4 = 470 μ F, 25 V; curve 6 = 1000 μ F, 10 V;
 curve 2 = 150 μ F, 63 V; curve 5 = 680 μ F, 16 V; curve 7 = 1500 μ F, 6,3 V.
 curve 3 = 220 μ F, 40 V;

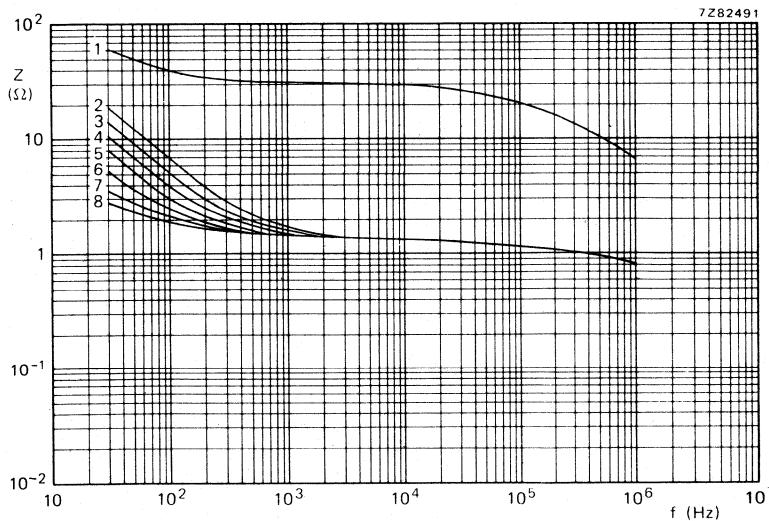


Fig. 61 Typical impedance as a function of frequency at -40 $^{\circ}$ C. Case size 01:
 curve 1 = 100 μ F, 100 V; curve 4 = 470 μ F, 40 V; curve 6 = 1000 μ F, 16 V;
 curve 2 = 220 μ F, 63 V; curve 5 = 680 μ F, 25 V; curve 7 = 1500 μ F, 10 V;
 curve 3 = 330 μ F, 40 V; curve 8 = 2200 μ F, 6,3 V.

2222 030
2222 031
2222 032
2222 033

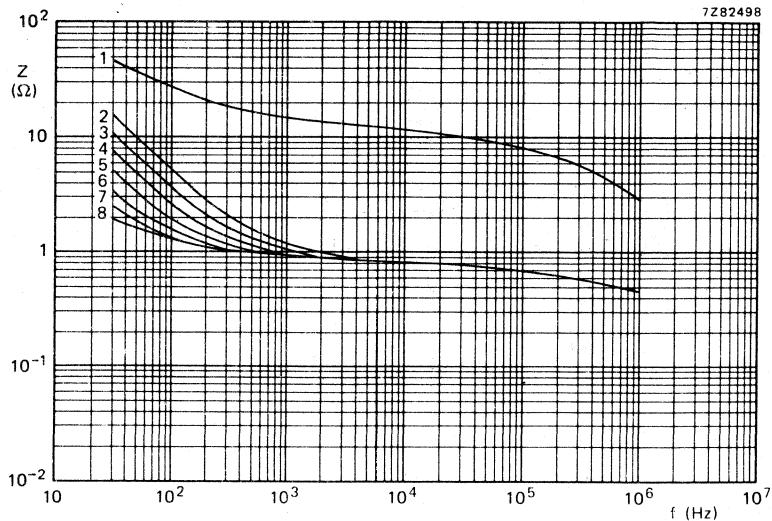


Fig. 62 Typical impedance as a function of frequency at -40°C . Case size 02:

- | | | |
|---|---|--|
| curve 1 = $150 \mu\text{F}, 100 \text{ V};$ | curve 4 = $680 \mu\text{F}, 40 \text{ V};$ | curve 6 = $1500 \mu\text{F}, 16 \text{ V};$ |
| curve 2 = $330 \mu\text{F}, 63 \text{ V};$ | curve 5 = $1000 \mu\text{F}, 25 \text{ V};$ | curve 7 = $2200 \mu\text{F}, 10 \text{ V};$ |
| curve 3 = $470 \mu\text{F}, 63 \text{ V};$ | | curve 8 = $3300 \mu\text{F}, 6.3 \text{ V}.$ |

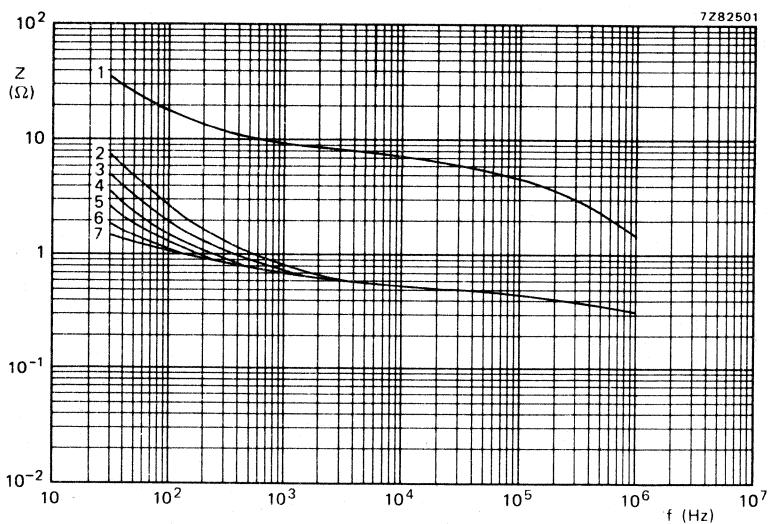


Fig. 63 Typical impedance as a function of frequency at -40°C . Case size 03:

- | | | |
|---|---|--|
| curve 1 = $220 \mu\text{F}, 100 \text{ V};$ | curve 4 = $1500 \mu\text{F}, 25 \text{ V};$ | curve 6 = $3300 \mu\text{F}, 10 \text{ V};$ |
| curve 2 = $680 \mu\text{F}, 63 \text{ V};$ | curve 5 = $2200 \mu\text{F}, 16 \text{ V};$ | curve 7 = $4700 \mu\text{F}, 6.3 \text{ V}.$ |
| curve 3 = $1000 \mu\text{F}, 40 \text{ V};$ | | |

Inductance (ESL)

Case sizes 00 and 01

50 nH

Case size 02

55 nH

Case sizes 03, 04 and 05

60 nH

typical values

OPERATIONAL DATA

Category temperature range

−40 to +85 °C

Typical life time at $T_{amb} = 85^\circ\text{C}$

case size 1

1500 h

case sizes 2 to 7

3000 h

case sizes 00 to 05

10 000 h

Shelf life at 0 V and $T_{amb} = 85^\circ\text{C}$

500 h

PACKING

All capacitors are supplied in boxes, except case sizes 1 to 7 of style 1, which are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 5.

Table 5

case size	number of capacitors		
	style 1 per reel	style 1 per box	styles 2 and 3 per box
1	4000	1000	1000
2	3000	1000	1000
3	1000	1000	1000
5a	500	500	1000
4	1000	1000	1000
5	500	500	1000
6	500	500	1000
7	500	500	500
00		200	200
01		200	200
02		200	200
03		200	200
04		100	100
05		100	100

2222 030
2222 031
2222 032
2222 033

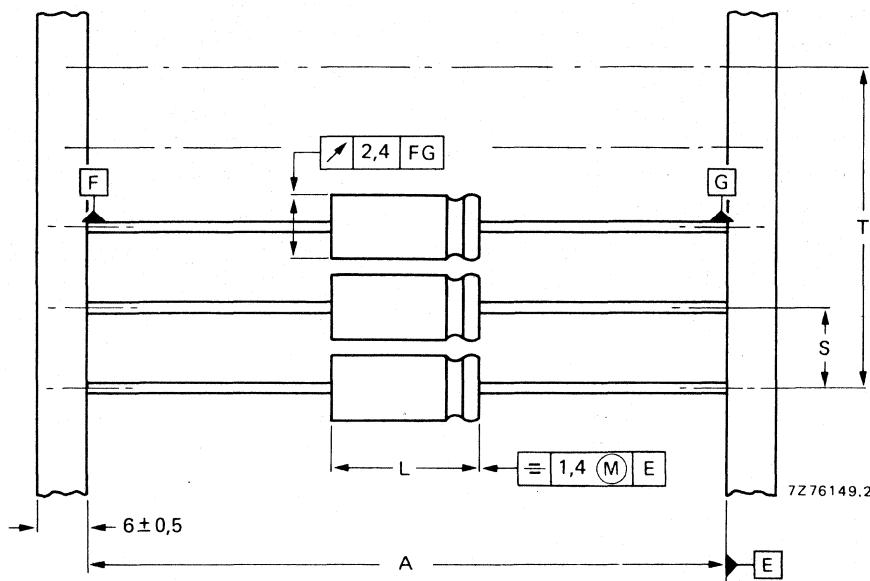


Fig. 64 Style 1 capacitors (case sizes 1 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 6 for dimensions A, S, T and L.

Table 6

Dimensions in mm

case size	A	S	T for number (n) of capacitors		L _{max}
			n < 50	50 < n < 100	
1	63,5 ± 1,6	5 ± 0,4	5 (n-1) ± 2	5 (n-1) ± 4	11,0
2	63,5 ± 1,6	5 ± 0,4	5 (n-1) ± 2	5 (n-1) ± 4	10,5
3	63,5 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	10,5
5a	63,5 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	11,5
4	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
5	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
6	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	18,5
7	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	25,0

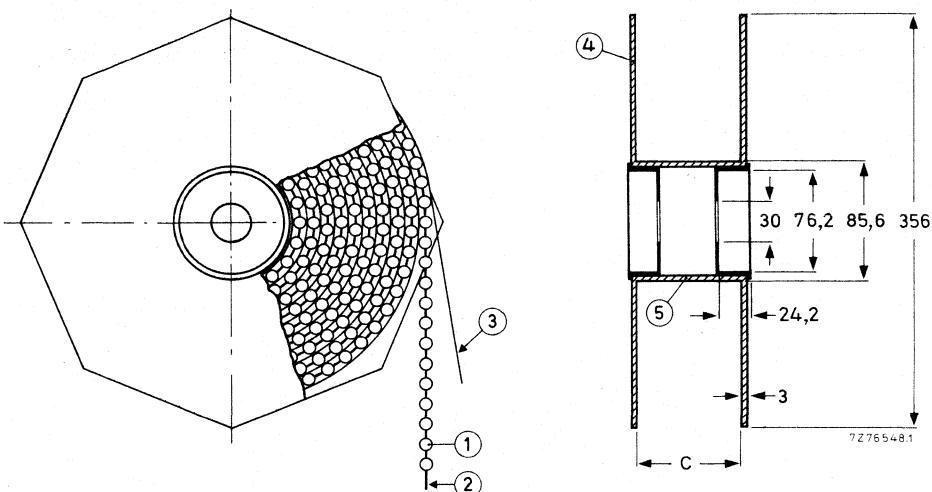


Fig. 65 Style 1 capacitors (case sizes 1 to 7) on bandoliers on reel; dimension C is 84,5 mm for case sizes 1, 2, 3 and 5a, and 88,0 mm for case sizes 4, 5, 6 and 7; the overall width of the reel is 94,5 mm and 99,5 mm respectively.

- | | |
|---------------|--------------|
| 1 = capacitor | 4 = flange |
| 2 = bandolier | 5 = cylinder |
| 3 = paper | |

TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition for case sizes 1 to 7.

After *endurance test, 2000 h, 85 °C*, the capacitors meet the following requirements:

$\Delta C/C \leq \pm 15\%$, for $U_R = 10$ to 100 V;

$\Delta C/C \leq + 15\%, -25\%$ for $U_R = 6,3$ V;

$\tan \delta \leq 130\%$ of specified value;

leakage current \leq specified value;

impedance at 10 kHz $\leq 200\%$ of specified value.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements, except for leakage current: $\leq 200\%$ of specified value.


Note:

Capacitors 2222 030 and 2222 031 are miniature types, long-life grade.

Capacitors 2222 032 and 2222 033 are small types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Single ended
- General purpose

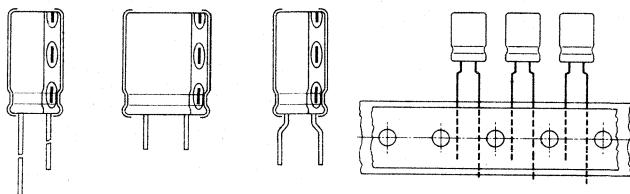

QUICK REFERENCE DATA

Nominal capacitance range (E6 series)

0,22 to 4700 μF

Tolerance on nominal capacitance

-20 to +20% *

Rated voltage range, U_R (R5 series)

6,3 to 100 V

Category temperature range

-40 to +85 °C

Endurance test

1000 h at 85 °C

Basic specification

IEC384-4, G.P. grade
DIN 41332/DN 41259

Climatic category

40/085/56

IEC 68

DIN 40040

GPF

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μF	U_R (V)								
	6,3	10	16	25	35	40	50	63	100
0,22								11	11
0,33								11	
0,47								11	11
0,68								11	
1								11	11
1,5								11	11
2,2								11	11
3,3								11	11
4,7								11	12
6,8								11	12
10							11	12	13
15						11		12	13
22					11	12	12	13	14
33			11			12		13	15
47	11		12			13	14	16	
68		12			13	14	15	17	
100	12		13	14		15	16	18	
150	12		13	14	15	16	17	18	
220		13	14	15	16	17	18	19	
330	13	14	15	16	17	18	19	20	
470	15	16	17		18		19		
680	15	16	17	18		19	19	20	
1000	16	17	18	19	19		20		
1500	17	18	19	20					
2200	18		19						
3300	19		20						
4700	20								

case size	nominal dimensions (mm)
11	ϕ 5 x 11
12	ϕ 6 x 11
13	ϕ 8 x 12
14	ϕ 10 x 12
15	ϕ 10 x 16
16	ϕ 10 x 20
17	ϕ 12,5 x 20
18	ϕ 12,5 x 25
19	ϕ 16 x 25
20	ϕ 16 x 31

* ± 10% to special order.

APPLICATION

These capacitors with high CU-product per unit volume are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits. Other applications are in timing and delay circuits.

DESCRIPTION

The capacitor has etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an insulated aluminium case.

MECHANICAL DATA

Dimensions in mm

The capacitor is available in 5 styles:

style 1: long leads; in boxes;

style 2: straight short leads; non preferred, in boxes;

style 3: bent short leads only case sizes 11, 12 and 13; non preferred, in boxes;

style 4: long leads; on tape on reel, positive leading; only case sizes 11 to 13;

style 5: long leads; on tape in ammunition pack; only case sizes 11 to 13.

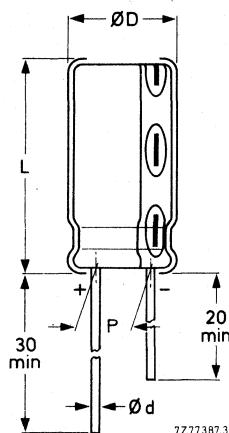


Fig. 1 Style 1; see Table 1
for dimensions d, D, L and P.

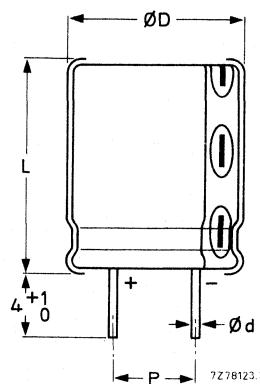


Fig. 2 Style 2; non preferred,
see Table 1 for dimensions d,
D, L and P.

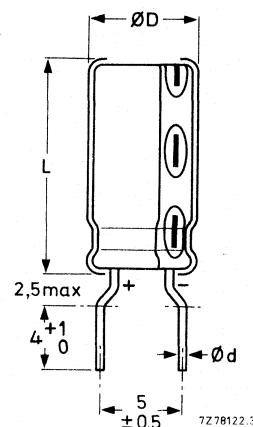


Fig. 3 Style 3, case sizes 11,
12 and 13; non preferred,
see Table 1 for dimensions d,
D and L.

Table 1

case size	dimensions				mass g
	d	D _{max}	L _{max}	P	
11	0,5*	5,5	12,0	2,0	0,4
12	0,6	6,5	12,0	2,5	0,6
13	0,6	8,5	12,5	3,5	1,1
14	0,6	10,5	12,5	5,0	1,6
15	0,6	10,5	17,0	5,0	1,9

case size	dimensions				mass g
	d	D _{max}	L _{max}	P	
16	0,6	10,5	21,0	5,0	2,2
17	0,6	13,0	21,0	5,0	4,0
18	0,6	13,0	26,0	5,0	5,0
19	0,8	16,5	26,0	7,5	8,0
20	0,8	16,5	32,0	7,5	9,0

* 0,6 mm under consideration.

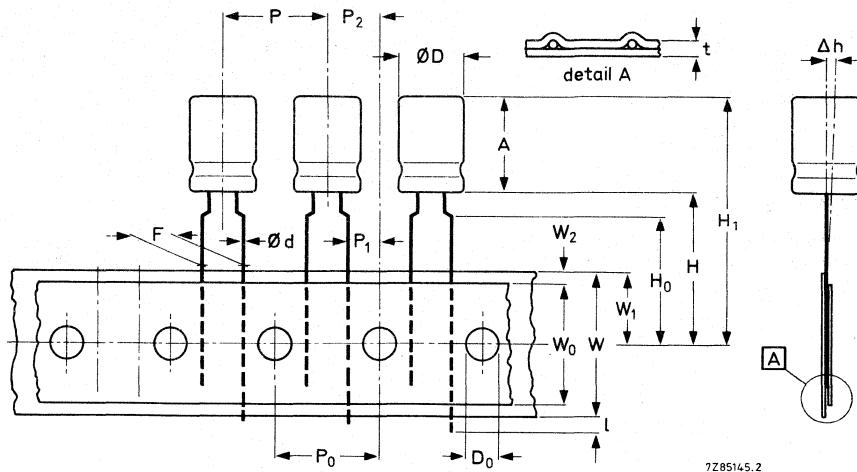


Fig. 4 Styles 4 and 5, case sizes 11 to 13; see Table 2 for dimensions.

Table 2

	symbol	case size			tol.
		11	12	13	
Body diameter	D	5,5	6,5	8,5	max.
Body height	A	12,0	12,0	12,5	max.
Lead-wire diameter	d	0,5*	0,6	0,6	± 0,05
Pitch of component	P	12,7	12,7	12,7	± 1,0
Feed-hole pitch	P ₀	12,7	12,7	12,7	± 0,2**
Hole centre to lead	P ₁	3,85	3,85	3,85	± 0,5
Feed hole centre to component centre	P ₂	6,35	6,35	6,35	± 1,0
Lead-to-lead distance	F	5,0	5,0	5,0	+ 0,6/- 0
Component alignment	Δh	0	0	0	± 1,0
Tape width	W	18,0	18,0	18,0	± 0,5
Hold-down tape width	W ₀	12,5	12,5	12,5	min.***
Hole position	W ₁	9,0	9,0	9,0	± 0,5
Hold-down tape position	W ₂	2,5	2,5	2,5	max.
Height of component from tape centre	H	18,0	18,0	18,0	+ 1,5/- 0
Lead-wire clinch height	H ₀	16,0	16,0	16,0	± 0,5
Component height	H ₁	32,20	32,20	32,20	max.
Lead-wire protrusion	I	2,0	2,0	2,0	max.
Feed-hole diameter	D ₀	4,0	4,0	4,0	± 0,2
Total tape thickness	t	0,9	0,9	0,9	max.

* 0,6 mm under consideration.

** Cumulative pitch error: ± 1 mm/20 pitches.

*** Other widths under consideration.

Marking

The capacitors are marked with: nominal capacitance, rated voltage, a symbol to identify the negative terminal, group number (035), code for factory of origin, name of manufacturer and date code (year and month) according to IEC 62.

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.



Table 3

UR	nom. cap.	max. r.m.s. ripple current at Tamb = 85 °C	max. leakage current at UR after 1 min	μA	mA	max. tan δ	max. impedance (Ω) at Tamb = 20 °C	case size	catalogue number 2222 035 followed by			
									style 1	style 2	style 3	on reel style 4
6,3	150	260	22	0,24	1,33	12	53151	83151	63151	23151	33151	33331
	330	320	45	0,24	0,61	13	53331	83331	63331	23331	33331	
	680	460	89	0,24	0,29	15	53681	63681				
	1000	530	129	0,24	0,20	16	53102	63102				
	1500	640	192	0,24	0,23	17	53152	63152				
	2200	800	280	0,24	0,16	18	53222	63222				
	3300	850	419	0,24	0,11	19	53332	63332				
	4700	960	595	0,24	0,07	20	53472	63472				
10	47	100	12	0,20	3,40	11	54479	84479	64479	24479	34479	
	100	160	23	0,20	1,60	12	54101	84101	64101	24101	34101	
	220	250	47	0,20	0,73	13	54221	84221	64221	24221	34221	
	330	340	69	0,20	0,48	14	54331	84331				
	470	400	97	0,20	0,34	15	54471	84471				
	680	480	139	0,20	0,24	16	54681	84681				
	1000	580	203	0,20	0,16	17	54102	64102				
	1500	720	303	0,20	0,2	18	54152	64152				
16	33	90	14	0,16	3,64	11	55339	85339	65339	25339	35339	
	68	180	25	0,16	1,76	12	55689	85689	65689	25689	35689	
	150	270	51	0,16	0,80	13	55151	85151	65151	25151	35151	
	220	320	73	0,16	0,55	14	55221	65221				
	330	405	109	0,16	0,36	15	55331	65331				
	470	480	153	0,16	0,26	16	55471	65471				
	680	590	221	0,16	0,18	17	55681	65681				
	1000	700	323	0,16	0,12	18	55102	65102				
	1500	820	483	0,16	0,17	19	55152	65152				
	2200	1000	707	0,16	0,11	19	55222	65222				
	3300	1200	1059	0,16	0,08	20	55332	65332				

Table 3 (continued)

UR	nom. cap.	max. r.m.s. ripple current at Tamb = 85 °C	max. leakage current at UR after 1 min	μ A	max. tan δ	max. impedance (Ω) at Tamb = 20 °C	case size	catalogue number 2222 035 followed by			
								1 kHz	10 kHz	style 1	style 2
25	47	140	27	0.14	1.91	12	56479	86479	66479	26479	36479
	100	230	53	0.14	0.90	13	56101	86101	66101	26101	36101
	150	330	78	0.14	0.60	14	56151	66151			
	220	400	113	0.14	0.41	15	56221	66221			
	330	500	168	0.14	0.27	16	56331	66331			
	470	600	238	0.14	0.19	17	56471	66471			
	680	710	343	0.14	0.13	18	56681	66681			
	1000	850	503	0.14	0.09	19	56102	66102			
	1500	1000	753	0.14	0.15	20	56152	66152			
	35	22	90	18	0.12	3.41	11	90003	90004	90005	90034
40	100	280	73	0.12	0.75	14	90059	90081			
	1000	1050	703	0.12	0.08	19	90006	90007			
	15	70	15	0.12	4.67	11	57159	87159	67159	27159	37159
	22	90	21	0.12	3.18	12	57229	87229	67229	27229	37229
	33	140	29	0.12	2.12	12	57339	87339	67339	27339	37339
	68	200	57	0.12	1.03	13	57689	87689	67689	27689	37689
	150	320	123	0.12	0.47	15	57151	67151			
	220	470	179	0.12	0.32	16	57221	67221			
	330	590	267	0.12	0.21	17	57331	67331			
	470	800	379	0.12	0.15	18	57471	67471			
50	680	960	547	0.12	0.10	19	57681	67681			
	10	60	13	0.10	6.00	11	90008	90009	90011	90035	90087
	22	100	25	0.10	2.73	12	90012	90013	90014	90036	90088
	47	180	50	0.10	1.28	13	90015	90016	90033	90037	90038
	68	260	71	0.10	0.88	14	90017	90018			
	100	320	103	0.10	0.60	15	90019	90021			
	150	410	153	0.10	0.40	16	90022	90023			
	220	500	223	0.10	0.27	17	90024	90025			
	330	650	333	0.10	0.18	18	90026	90027			
	680	980	683	0.10	0.09	19	90028	90029			
	1000	1100	1003		0.06	20	90031				

Table 3 (continued)

UR V	μF	mA	μA	max. leakage current at UR after 1 min	max. tan δ	max. impedance (Ω) at Tamb = 20 °C	case size	catalogue number 22222 035 followed by		
								on reel style 4	in ammopack style 5	
										
63	0,22	6	3	0,08	0,08	250	11	58227	68227	28227
	0,33	7	3	0,08	0,08	167	11	58337	68337	28337
	0,47	8	4	0,08	0,08	117	11	58477	68477	28477
	0,68	10	4	0,08	0,08	81	11	58687	68687	28687
	1,0	12	4	0,08	0,08	55,0	11	58108	68108	28108
	1,5	16	5	0,08	0,08	36,7	11	58158	68158	28158
	2,2	22	6	0,08	0,08	25,0	11	58228	68228	28228
	3,3	32	7	0,08	0,08	16,7	11	58338	68338	28338
	4,7	40	9	0,08	0,08	11,7	11	58478	68478	28478
	6,8	55	12	0,08	0,08	8,09	11	58688	68688	28688
	10	70	16	0,08	0,08	5,50	12	58109	68109	28109
	15	98	22	0,08	0,08	3,67	12	58159	68159	28159
	22	120	31	0,08	0,08	2,50	13	58229	68229	28229
	33	160	45	0,08	0,08	1,67	13	58339	68339	28339
	47	200	62	0,08	0,08	1,17	14	58479	68479	
	68	280	89	0,08	0,08	0,81	15	58689	68689	
	100	360	129	0,08	0,08	0,55	16	58101	68101	
	150	480	192	0,08	0,08	0,37	17	58151	68151	
	220	600	280	0,08	0,08	0,25	18	58221	68221	
	330	750	419	0,08	0,08	0,17	19	58331	68331	
	470	900	595	0,08	0,08	0,12	19	58471	68471	
	680	1040	860	0,08	0,08	0,08	20	58681	68681	

Table 3 (continued)

UR	μF	mA	μA	max. leakage current at UR after 1 min	max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$	max. tan δ	max. impedance (Ω) at $T_{\text{amb}} = 20^\circ\text{C}$	case size	catalogue number 2222 035 followed by			
									at 1 kHz	at 10 kHz	style 1	style 2
100	0,22	10	3	0,07	205	11	59227	69227	29227	29227	39227	39227
	0,47	12	4	0,07	95,7	11	59477	69477	29477	29477	39477	39477
	1,0	15	5	0,07	45,0	11	59108	69108	29108	29108	39108	39108
	1,5	20	6	0,07	30,0	11	59158	69158	29158	29158	39158	39158
	2,2	27	7	0,07	20,5	11	59228	69228	29228	29228	39228	39228
	3,3	35	10	0,07	13,6	11	59338	69338	29338	29338	39338	39338
	4,7	45	12	0,07	9,57	12	59478	69478	29478	29478	39478	39478
	6,8	59	17	0,07	6,62	12	59688	69688	29688	29688	39688	39688
	10	80	23	0,07	4,50	13	59109	69109	29109	29109	39109	39109
	15	105	33	0,07	3,00	13	59159	69159	29159	29159	39159	39159
	22	140	47	0,07	2,05	14	59229	69229				
	33	180	69	0,07	1,36	15	59339	69339				
	47	240	97	0,07	0,96	16	59479	69479				
	68	340	139	0,07	0,66	17	59689	69689				
	100	440	203	0,07	0,45	18	59101	69101				
	150	630	303	0,07	0,30	18	59151	69151				
	220	800	443	0,07	0,20	19	59221	69221				
	330	900	663	0,07	0,14	20	59331	69331				

CapacitanceNominal capacitance at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$

see Table 3

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

Voltage

Rated voltage = max. permissible voltage

$< 40^{\circ}\text{C}$	$40 \text{ to } 85^{\circ}\text{C}$
$1,15 \times U_R$	U_R

Ripple voltage* = max. permissible a.c. voltage providing
the following three conditions are met:

a) max. (d.c.) + peak a.c. voltage	$\leq 1,15 \times U_R$	$\leq U_R$
b) max. peak a.c. voltage with d.c. voltage applied	$\leq \text{applied d.c. voltage} + 2 \text{ V}$	
c) max. peak a.c. voltage without d.c. voltage applied		2 V


Surge voltage = max. permissible voltage for short periods

 $1,2 \times U_R$ Reverse voltage = max. d.c. voltage applied in the reverse polarity
for short periods

2 V

Ripple current**Maximum permissible r.m.s. ripple current at
100 Hz and $T_{amb} = 85^{\circ}\text{C}$

see Table 3

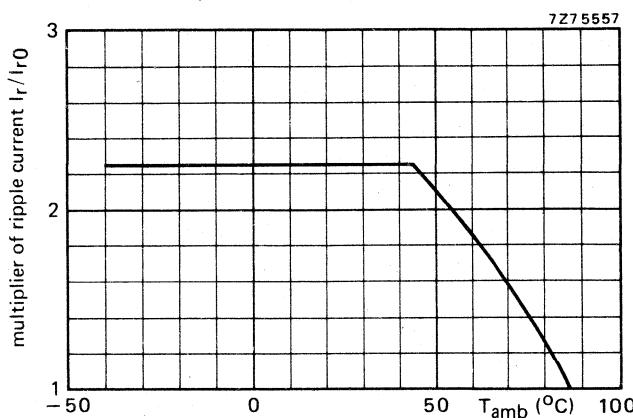Fig. 5 Typical multiplier of ripple current as a function of ambient temperature;
 I_{r0} = ripple current at 85°C , 100 Hz.

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

** Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r\max}^2$$

$I_{r\max}$ = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$r_n = I_r/I_{r0}$ = multiplying factor at a same frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

Leakage current

Maximum leakage current 1 min after application
of U_R at $T_{amb} = 25^\circ C$

see Table 3 (0,02 CU + 3 μA)

Leakage current during continuous operation at U_R ,
at $T_{amb} = 25^\circ C$
at $T_{amb} = 85^\circ C$

approx. $0,1 \times$ value stated in Table 3
 \leq value stated in Table 3

If owing to prolonged storage and/or storage at an excessive temperature ($> 40^\circ C$) the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 3.

$\tan \delta$ (dissipation factor)

Maximum $\tan \delta$ at 100 Hz and $T_{amb} = 25^\circ C$, measured by
means of a four-terminal circuit (Thomson circuit)

see Table 3

Equivalent series resistance (ESR)

$ESR = \tan \delta / \omega C$

Maximum $\tan \delta$ and C at 100 Hz and $T_{amb} = 25^\circ C$

see Table 3

Impedance (Z)

Maximum impedance at $T_{amb} = 20^\circ C$ and 10 kHz
($C_{nom} \leq 1000 \mu F$) or 1 kHz ($C_{nom} > 1000 \mu F$),
measured by means of a four-terminal
circuit (Thomson circuit)

see Table 3

$z = Z \times C_{nom}$

see Table 4

Maximum ratio between impedances at $T_{amb} = -25^\circ C$
and $+20^\circ C$, and at $T_{amb} = -40^\circ C$ and $+20^\circ C$,
at 100 Hz measured by means of a four-terminal
circuit (Thomson circuit)

see Table 5

Table 4

	T _{amb}	z = Z × C _{nom} (Ω μF) at U _R								
		6,3 V	10 V	16 V	25 V	35 V	40 V	50 V	63 V	100 V
C _{nom} > 1000 μF, measured at 1 kHz	+ 20 °C	350	300	250	220	—	200	—	180	175
	- 25 °C	1700	1100	800	570	—	430	—	330	300
	- 40 °C	4500	2800	2000	1400	—	1100	—	800	700
C _{nom} ≤ 1000 μF, measured at 10 kHz	+ 20 °C	200	160	120	90	75	70	60	55	45
	- 25 °C	1200	750	560	400	330	300	220	180	130
	- 40 °C	3200	2000	1500	1100	950	900	700	500	350

Table 5

	maximum impedance ratio at U _R and 100 Hz								
	6,3 V	10 V	16 V	25 V	35 V	40 V	50 V	63 V	100 V
Z at - 25 °C									
Z at + 20 °C	4	3	2	2	2	2	2	2	2
Z at - 40 °C									
Z at + 20 °C	7	5	5	4	4	4	4	4	4

OPERATIONAL DATACategory temperature range - 40 to + 85 °C

Life expectancy

at T_{amb} = 85 °C 2000 h
at T_{amb} = 105 °C 500 h**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 6

Table 6

case size	number of capacitors				
	style 1 per box	style 2 per box	style 3 per box	style 4 per reel	style 5 per ammunition pack
11	1000	1000	1000	1000	2000
12	1000	1000	1000	1000	2000
13	1000	1000	1000	500	1000
14	1000	1000			
15	500	500			
16	500	500			
17	200	200			
18	200	200			
19	200	200			
20	200	200			

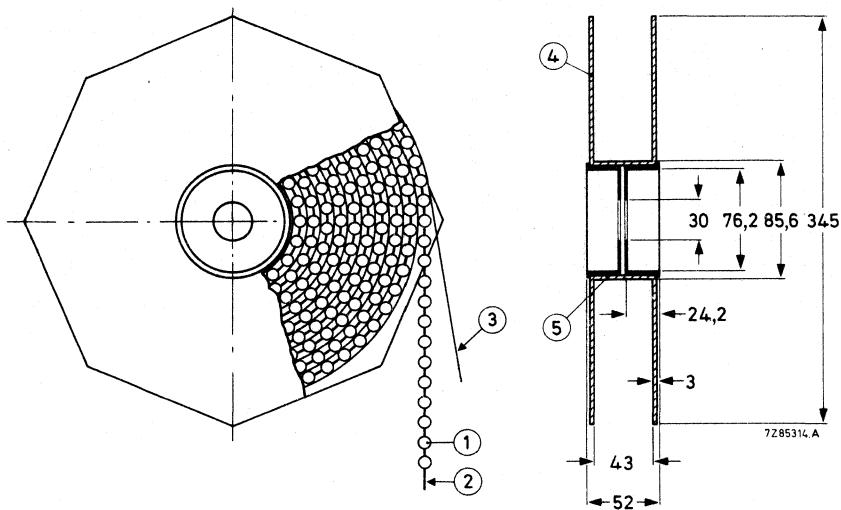


Fig. 6 Capacitors (style 4) on tape on reel.

1 = capacitor 4 = flange
 2 = tape 5 = cylinder
 3 = paper

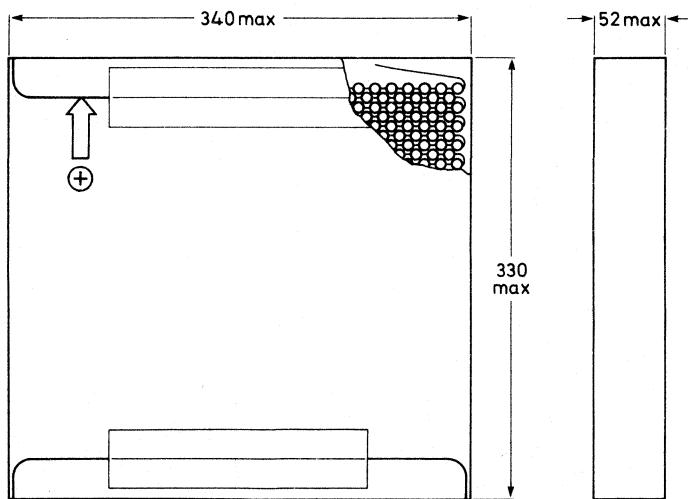


Fig. 7 Capacitors (style 5) on tape in ammunition pack.


TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 035 are miniature and small, general-purpose types.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature
- Single ended
- General and industrial applications

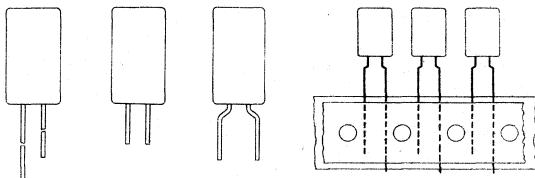

QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	0,22 to 330 μ F
Tolerance on nominal capacitance	-20 to + 20% *
Rated voltage range, U_R (R5 series)	6,3 to 63 V
Category temperature range	-55 to + 85 °C
Endurance test	2000 h at 85 °C
Shelf life at 0 V	500 h at 85 °C
Basic specification	IEC 384-4, G.P. grade DIN 41332/DIN 41259
Climatic category	55/085/56
IEC68	
DIN 40040	FPF

Selection chart for C_{nom} – U_R and relevant case sizes.

C_{nom} μ F	U_R (V)							
	6,3	10	16	25	35	40	50	63
0,22								11
0,33								11
0,47								11
0,68								11
1								11
1,5								11
2,2								11
3,3								11
4,7								11
6,8								11
10						11	11	
15					11			
22				11			13	
33		11					13	
47	11					13		
68	11				13			
100	11		13					
150		13						
220	13							
330	13							

case size	nominal dimensions (mm)
11	ϕ 5 x 11
13	ϕ 8,2 x 11

* ± 10% to special order.

APPLICATION

These capacitors with high CV product to volume ratio mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits. Other applications are in timing and delay circuits.

DESCRIPTION

The capacitor has etched and oxidised aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an insulated aluminium case.

MECHANICAL DATA

Dimensions in mm

The capacitor is available in 5 styles:

style 1: long leads; in boxes;

style 2: straight short leads; non preferred, in boxes;

style 3: bent short leads (only case size 11); non preferred, in boxes;

style 4: long leads; on tape on reel, positive leading;

style 5: long leads; on tape in ammunition pack.




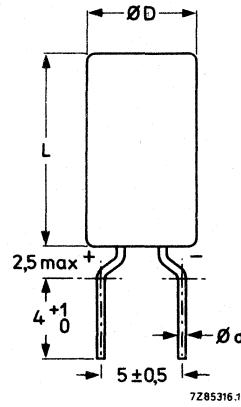


Table 1

case size	dimensions				mass approx. g
	d	D _{max}	L _{max}	P	
11	0,5*	5,5	12,0	2,5	0,4
13	0,6	8,7	12,0	5,0	1,1

* 0,6 mm under consideration.

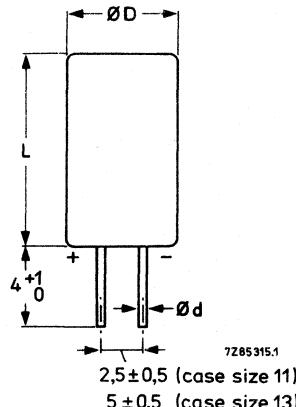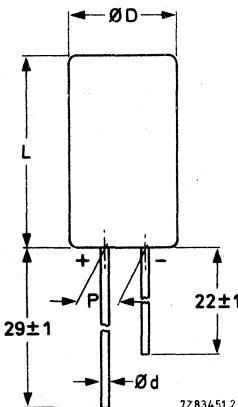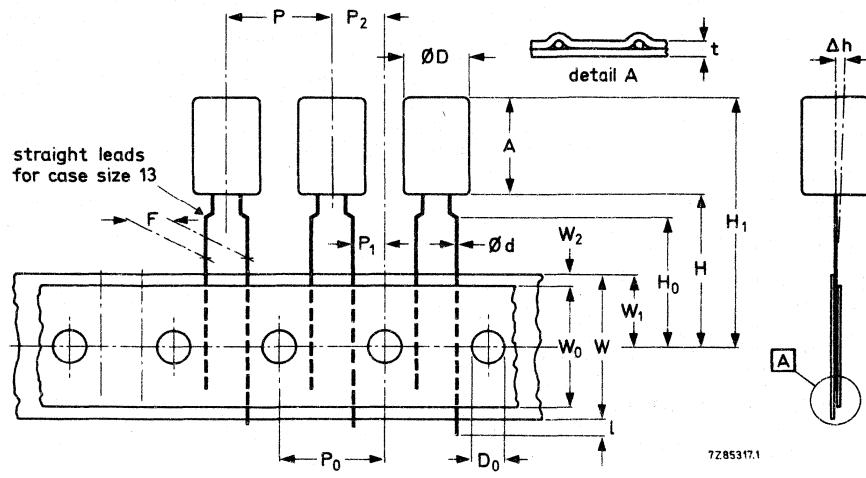

→ direction of tape transport

Fig. 4 Styles 4 and 5; see Table 2 for dimensions.

Table 2

	symbol	case size		tol.
		11	13	
Body diameter	D	5,5	8,7	max.
Body height	A	12,0	12,0	max.
Lead-wire diameter	d	0,5*	0,6	$\pm 0,05$
Pitch of component	P	12,7	12,7	$\pm 1,0$
Feed-hole pitch	P ₀	12,7	12,7	$\pm 0,2^{**}$
Hole centre to lead	P ₁	3,85	3,85	$\pm 0,5$
Feed hole centre to component centre	P ₂	6,35	6,35	$\pm 0,7$
Lead-to-lead distance	F	5,0	5,0	$+0,6/-0,6$
Component alignment	Δh	0	0	$\pm 1,0$
Tape width	W	18,0	18,0	$\pm 0,5$
Hold-down tape width	W ₀	12,5	12,5	min. ***
Hole position	W ₁	9,0	9,0	$\pm 0,5$
Hold-down tape position	W ₂	2,5	2,5	max.
Height of component from tape centre	H	18,0	18,0	$+1,5/-0,5$
Lead-wire clinch height	H ₀	16,0	—	$\pm 0,5$
Component height	H ₁	32,20	32,20	max.
Lead-wire protrusion	I	2,0	2,0	max.
Feed-hole diameter	D ₀	4,0	4,0	$\pm 0,2$
Total tape thickness	t	0,9	0,9	max.

* 0,6 mm under consideration.

** Cumulative pitch error: $\pm 1 \text{ mm}/20$ pitches.

*** Other widths under consideration.

Marking

The capacitors are marked as follows:

on the top

- nominal capacitance;
- code letter for tolerance on nominal capacitance, according to IEC62;
- rated voltage;
- polarity identification.

on the circumference

- name of manufacturer;
- group number (036);
- code letter of manufacturer;
- date code (year and month) according to IEC 62.

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 3

UR V	nom. cap. μF	max. r.m.s. ripple current at Tamb = 85 °C mA	max. leakage current at UR after 1 min. μA	max. tan δ	max. impedance at 10 kHz, Tamb = 20 °C Ω	case size*	catalogue number 2222 036 followed by		
							style 1	style 2	style 3
6,3	100	160	7	0,20	1,7	11	53101	83101	63101
	330	320	16	0,20	0,52	13	53331	63331	33331
10	47	100	6	0,16	2,77	11	54479	84479	64479
	68	120	7	0,16	1,91	11	54689	84689	64689
	220	250	17	0,16	0,59	13	54221	64221	24221
16	33	90	7	0,14	2,73	11	55339	85339	25339
	150	270	18	0,14	0,60	13	55151	65151	35151
	100	230	18	0,12	0,70	13	56101	66101	26101
25	22	90	8	0,10	2,73	11	90001	90002	90016
	15	70	7	0,10	3,67	11	57159	87159	27159
40	68	200	20	0,10	0,81	13	57689	67689	27689
	10	60	6	0,08	4,5	11	90004	90005	90006
50	47	180	18	0,08	0,96	13	90011	90012	90019
	63	5,5	4	0,06	182	11	58227	68227	38227
	0,22	7	4	0,06	121	11	58337	68337	38337
	0,33	4	4	0,06	85,1	11	58477	88477	28477
	0,47	8	4	0,06	58,5	11	58687	68687	38687
	0,68	10	4	0,06	40	11	58108	68108	38108
	1,0	12	4	0,06	26,7	11	58158	68158	38158
	1,5	16	4	0,06	18,2	11	58228	68228	38228
	2,2	22	4	0,06	12,1	11	58338	68338	38338
	3,3	32	5	0,06	8,5	11	58478	68478	38478
	4,7	40	5	0,06	5,88	11	58688	68688	38688
	6,8	55	6	0,06	4,0	11	58809	68809	38809
10	10	70	7	0,06	1,82	13	58229	68229	38229
	22	120	12	0,06	1,21	13	58339	68339	38339
	33	160	16	0,06					

* Case size 11: φ 5 mm x 11 mm; case size 13: φ 8,2 mm x 11 mm (nominal dimensions).



CapacitanceNominal capacitance at 100 Hz and $T_{amb} = 20^\circ C$

see Table 3

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

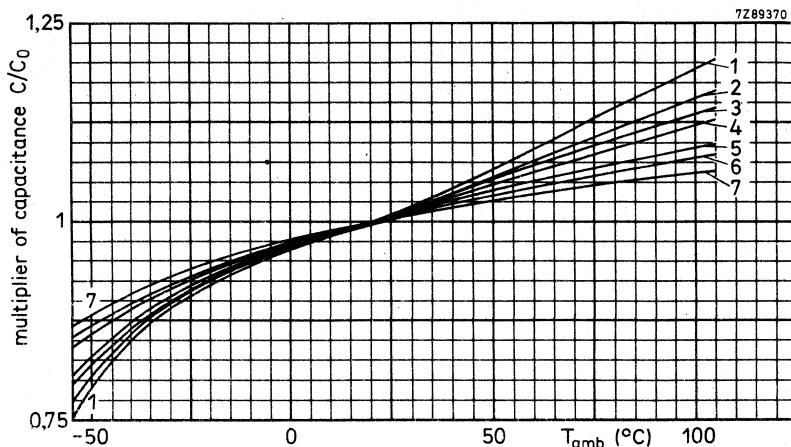


Fig. 5 Typical multiplier of capacitance as a function of ambient temperature case size 11;
 C_0 = capacitance at $25^\circ C$, 100 Hz.

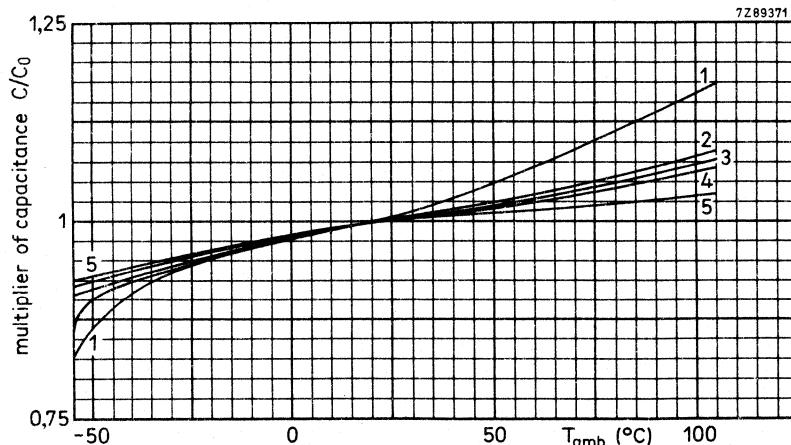
curve 1 = $100 \mu F$, 6,3 V;curve 3 = $22 \mu F$, 35 V;curve 6 = $15 \mu F$, 40 Vcurve 2 = $47 \mu F$, 10 V andcurve 4 = $33 \mu F$, 16 V;curve 7 = $10 \mu F$, 50 V.68 μF , 10 V;curve 5 = $1 \mu F$, 63 V;

Fig. 6 Typical multiplier of capacitance as a function of ambient temperature case size 13;
 C_0 = capacitance at $25^\circ C$, 100 Hz.

curve 1 = $220 \mu F$, 10 V;curve 3 = $47 \mu F$, 50 V;curve 5 = $22 \mu F$, 63 V.curve 2 = $100 \mu F$, 25 V;curve 4 = $10 \mu F$, 63 V;

Voltage

Rated voltage = max. permissible voltage

$< 40^{\circ}\text{C}$	$40 \text{ to } 85^{\circ}\text{C}$
------------------------	-------------------------------------

$1,15 \times U_R$

Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met:

- max. (d.c. + peak a.c.) voltage
- max. peak a.c. voltage with d.c. voltage applied
- max. peak a.c. voltage without d.c. voltage applied

$1,15 \times U_R$	U_R
applied d.c. voltage + 2 V	
	2 V

Surge voltage = max. permissible voltage for short periods

$1,2 \times U_R$

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

2 V

Ripple current**

Maximum permissible r.m.s. ripple current at

100 Hz and $T_{\text{amb}} = 85^{\circ}\text{C}$

see Table 3

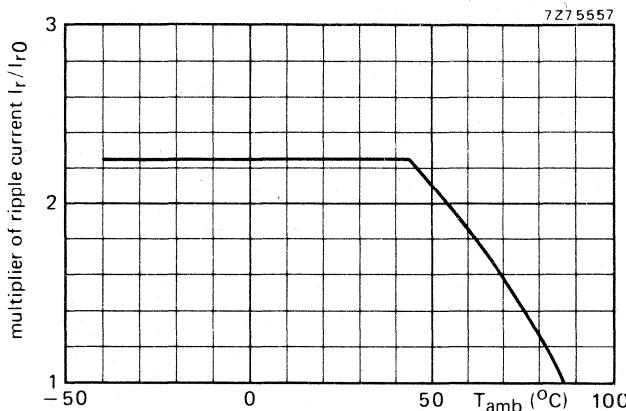


Fig. 7 Typical multiplier of ripple current as a function of ambient temperature;
 I_{r0} = ripple current at 85°C , 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents. The following requirements must then be satisfied:

$$\sum \frac{I_n^2}{r_n} \leq I_{r \text{ max}}^2$$

$I_{r \text{ max}}$ = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at the required frequency;

$r_n = I_r/I_{r0}$ = multiplying factor at the required frequency.

* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded.

In that case the ripple current is decisive.

** Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded.

In that case the ripple voltage is decisive.

Charge and discharge current

There is no limit on the charge or discharge rate. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

Leakage current

Maximum leakage current 1 min after application
of U_R at $T_{amb} = 25^{\circ}\text{C}$

see Table 3 (0,006 CU + 3 μA)

Leakage current during continuous operation at U_R ,
at $T_{amb} = 25^{\circ}\text{C}$
at $T_{amb} = 85^{\circ}\text{C}$

approx. $0,1 \times$ value stated in Table 3
 \leqslant value stated in Table 3

 $\tan \delta$ (dissipation factor)

Maximum $\tan \delta$ at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$,
measured by a four-terminal circuit (Thomson circuit)

see Table 3

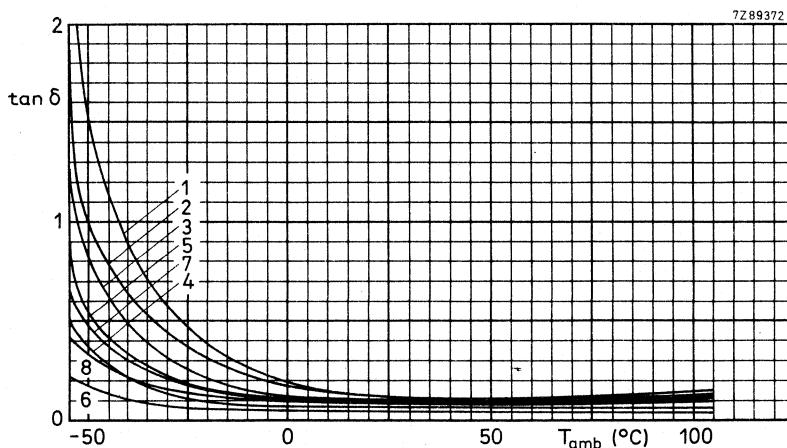


Fig. 8 Typical $\tan \delta$ at 100 Hz as a function of ambient temperature, case size 11;

curve 1 = $100 \mu\text{F}, 6,3 \text{ V};$
curve 2 = $68 \mu\text{F}, 10 \text{ V};$
curve 3 = $47 \mu\text{F}, 10 \text{ V};$

curve 4 = $22 \mu\text{F}, 35 \text{ V};$
curve 5 = $33 \mu\text{F}, 16 \text{ V};$
curve 6 = $1 \mu\text{F}, 63 \text{ V};$

curve 7 = $15 \mu\text{F}, 40 \text{ V};$
curve 8 = $10 \mu\text{F}, 50 \text{ V}.$

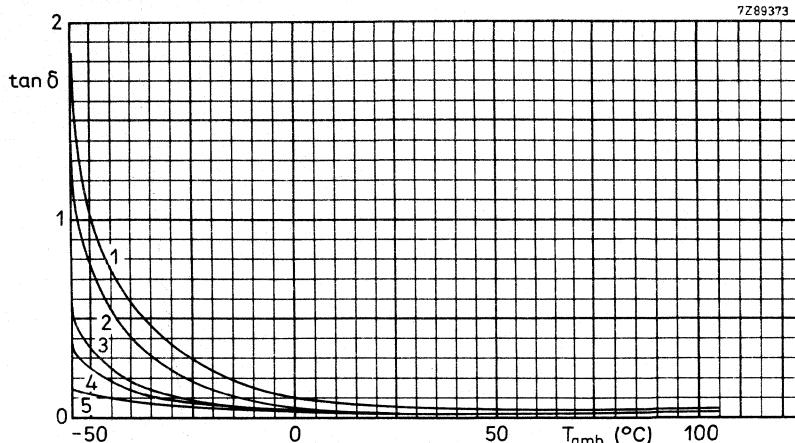


Fig. 9 Typical $\tan \delta$ at 100 Hz as a function of ambient temperature, case size 13;

curve 1 = $220 \mu\text{F}, 10 \text{ V};$
curve 2 = $100 \mu\text{F}, 25 \text{ V};$

curve 3 = $47 \mu\text{F}, 50 \text{ V};$
curve 4 = $10 \mu\text{F}, 63 \text{ V};$

curve 5 = $22 \mu\text{F}, 63 \text{ V}.$

Equivalent series resistance (ESR)

$\text{ESR} = \tan \delta / \omega C$

Maximum $\tan \delta$ and C at 100 Hz and $T_{\text{amb}} = 25^\circ\text{C}$ see Table 3

Impedance (Z)

Maximum impedance at $T_{\text{amb}} = 20^\circ\text{C}$ and 10 kHz,
measured by a four-terminal circuit
(Thomson circuit)

see Table 3

$$z = Z \times C_{\text{nom}}$$

see Table 4

Maximum ratio between impedances at $T_{\text{amb}} = -25^\circ\text{C}$
and $+20^\circ\text{C}$, and at $T_{\text{amb}} = -55^\circ\text{C}$ and $+20^\circ\text{C}$,
at 100 Hz measured by a four-terminal
circuit (Thomson circuit)

see Table 5

Table 4

T_{amb}	$z = Z \times C_{nom} (\Omega \mu F)$ at U_R and 10 kHz							
	6,3 V	10 V	16 V	25 V	35 V	40 V	50 V	63 V
+ 20 °C	≤ 170	≤ 130	≤ 90	≤ 70	≤ 60	≤ 55	≤ 45	≤ 40
- 25 °C	≤ 900	≤ 560	≤ 400	≤ 300	≤ 250	≤ 220	≤ 160	≤ 130
- 40 °C	≤ 2500	≤ 1500	≤ 1100	≤ 900	≤ 750	≤ 700	≤ 580	≤ 400
- 55 °C	typ. 5500	typ. 3500	typ. 2500	typ. 1800	typ. 1200	typ. 1000	typ. 750	typ. 500

Table 5

	maximum impedance ratio at U_R and 100 Hz							
	6,3 V	10 V	16 V	25 V	35 V	40 V	50 V	63 V
Z at - 25 °C	4	3	3	2	2	2	2	2
Z at + 20 °C								
Z at - 40 °C	7	5	5	4	4	4	4	4
Z at + 20 °C								

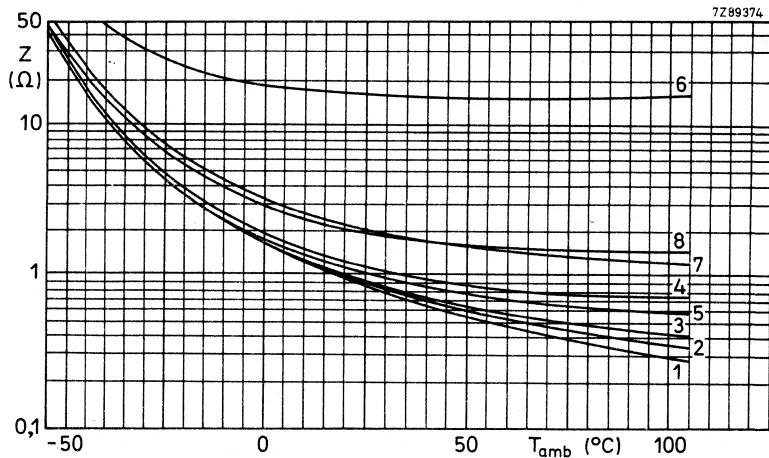


Fig. 10 Typical impedance at 10 kHz as a function of ambient temperature, case size 11;

curve 1 = 100 μF , 6,3 V;
 curve 2 = 68 μF , 10 V;
 curve 3 = 47 μF , 10 V;

curve 4 = 22 μF , 35 V;
 curve 5 = 33 μF , 16 V;
 curve 6 = 1 μF , 63 V;

curve 7 = 15 μF ; 40 V;
 curve 8 = 10 μF , 50 V.

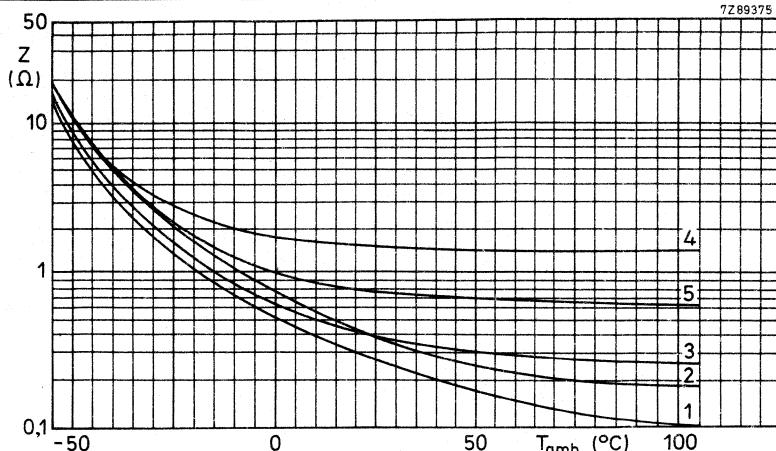


Fig. 11 Typical impedance at 10 kHz as a function of ambient temperature, case size 13;

curve 1 = 220 μF , 10 V;

curve 2 = 100 μF , 25 V;

curve 3 = 47 μF , 50 V;

curve 4 = 10 μF , 63 V;

curve 5 = 22 μF , 63 V.

OPERATIONAL DATA

Category temperature range

-55 to +85 $^{\circ}\text{C}$

Life guarantee

> 2000 h

at $T_{\text{amb}} = 85 \text{ }^{\circ}\text{C}$

> 1000 h

at $T_{\text{amb}} = 95 \text{ }^{\circ}\text{C}$

> 500 h

at $T_{\text{amb}} = 105 \text{ }^{\circ}\text{C}$

PACKING

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 6.

Table 6

case size	number of capacitors				
	style 1 per box	style 2 per box	style 3 per box	style 4 per reel (min.)	style 5 per ammunition pack
11	1000	1000	1000	1000	2000
13	1000	1000	1000	500	1000

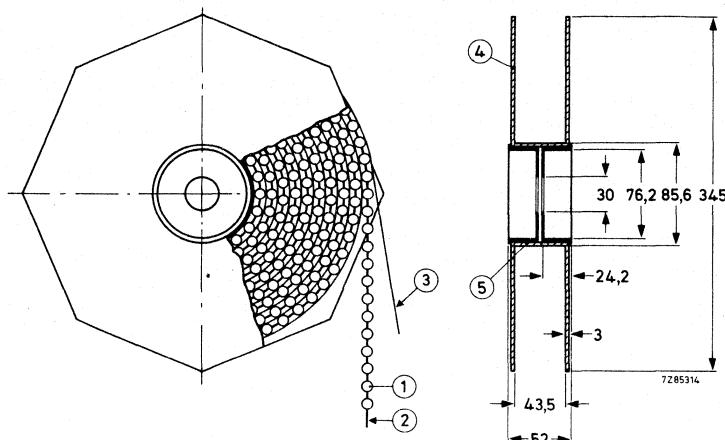


Fig. 12 Capacitors (style 4) on tape on reel.

- | | |
|---------------|--------------|
| 1 = capacitor | 4 = flange |
| 2 = tape | 5 = cylinder |
| 3 = paper | |

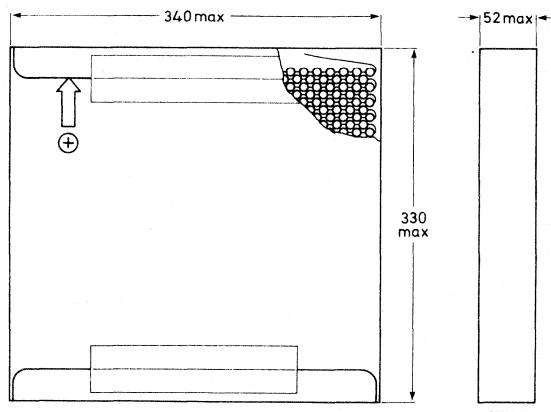


Fig. 13 Capacitors (style 5) on tape in ammunition pack.

TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test, 2000 h, 85 °C*, the capacitors meet the following requirements:

$\Delta C/C \leq \pm 15\%$, for $U_R = 10$ to 63 V,

$\Delta C/C \leq +15\%, -25\%$ for $U_R = 6,3$ V;

$\tan \delta \leq 130\%$ of specified value;


leakage current \leq specified value.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements.

Note: Capacitors 2222 036 are miniature, general-purpose types.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Small type
- Bipolar
- Long life
- General and industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	1 to 47 μF
Tolerance on nominal capacitance	-20 to +20%
Rated voltage U_R (a.c.), frequency > 15 Hz	63 V peak (40 V r.m.s.), provided ripple current remains within specified limits
Rated voltage U_R (d.c.)	63 V (in both directions)
Category temperature range	-40 to +85 °C
Endurance test at 85 °C	5000 h
Basic specification	IEC384-4, long-life grade
Climatic category, IEC68	40/085/56

Selection chart for C- U_R and relevant case sizes

U_R V	C_{nom} μF	case size	nom. dimensions mm
63	1	00	$\phi 10 \times 30$
	1,5	00	$\phi 10 \times 30$
	2,2	00	$\phi 10 \times 30$
	3,3	00	$\phi 10 \times 30$
	4,7	00	$\phi 10 \times 30$
	6,8	00	$\phi 10 \times 30$
	10	01	$\phi 12,5 \times 30$
	15	01	$\phi 12,5 \times 30$
	22	02	$\phi 15 \times 30$
	33	02	$\phi 15 \times 30$
	47	03	$\phi 18 \times 30$

APPLICATION

These capacitors are especially designed for those applications where a low impedance, small dissipation and an excellent temperature constancy over the audio frequency range is required such as crossover filters in loudspeaker boxes and intercom systems.

DESCRIPTION

The capacitor has etched aluminium-foil electrodes rolled up with a porous paper spacer which separates the two anodes. The spacer is impregnated with an electrolyte which is the electrical connection between the two anode foils and retains its good characteristics both at low and at high temperatures. The capacitor is housed in an aluminium case. It has soldered-copper leads.

MECHANICAL DATA

Dimensions in mm

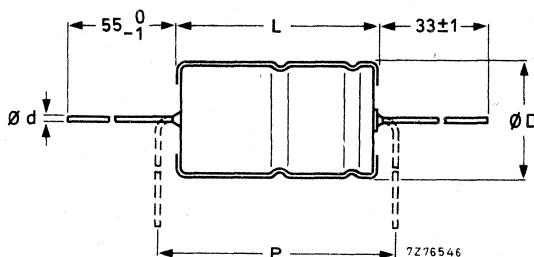


Fig. 1 For dimensions d, D, L and P, see Table 1.

→ **Table 1**

case size	d	D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	mass approx. g
00	0,8	10	30	10,5	30,5	35	4,0
01	0,8	12,5	30	13,0	30,5	35	6,3
02	0,8	15	30	15,5	30,5	35	8,2
03	0,8	18	30	18,5	30,5	35	10,9

Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- group number 039;
- name of manufacturer;
- date code (year and month) according to IEC62;
- bipolar.

Mounting

The diameter of the mounting holes in the printed-wiring board is 1 + 0,1 mm.

Minimum atmospheric pressure 8,5 kPa

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 93 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nom. cap. V	max r.m.s. ripple current at $T_{amb} = 85^\circ\text{C}$ mA*	max leakage current at U_R after 5 min μA^*	typ ESR Ω^*	max ESR Ω^*	case size	catalogue number
63	1	14	7	260	570	00	2222 039 18108
	1,5	19	7	140	290	00	18158
	2,2	25	7	80	135	00	18228
	3,3	35	10	38	85	00	18338
	4,7	42	15	26	59	00	18478
	6,8	51	21	18	41	00	18688
	10	70	31	12	28	01	18109
	15	84	47	8,5	19	01	18159
	22	121	61	5	11	02	18229
	33	147	82	3,1	7	02	18339
	47	213	109	1,9	4,3	03	18479

Capacitance

The nominal capacitance values at 100 Hz are given in Table 2. The tolerance on nominal capacitance at 100 Hz is -20 to +20%.

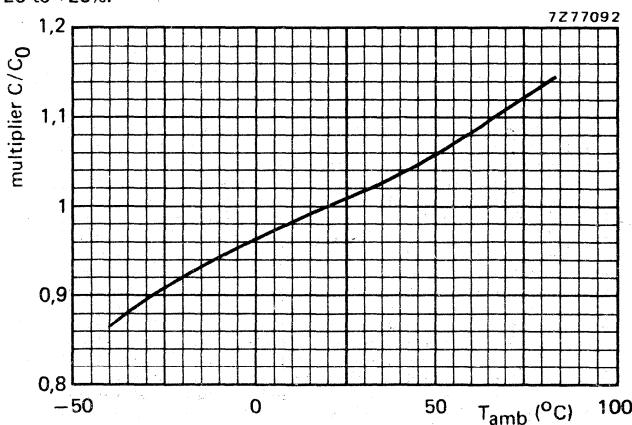


Fig. 2 Typical capacitance as a function of ambient temperature; C_0 = capacitance at 20°C and 100 Hz.

* See also corresponding paragraph.

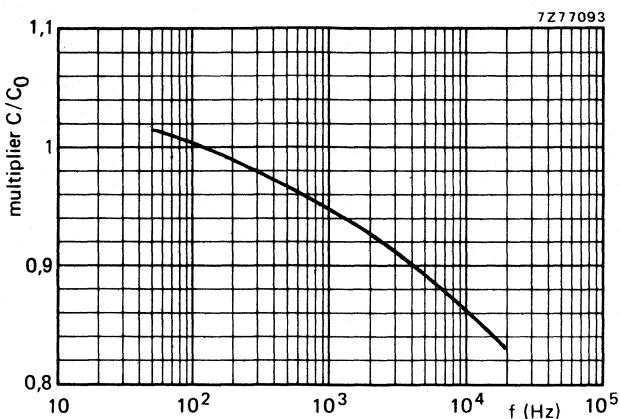


Fig. 3 Typical capacitance as a function of frequency; C_0 = capacitance at 20 °C and 100 Hz.

Voltage

The rated voltage U_R (a.c.) in the temperature range -40 to +85 °C is 63 V peak (40 V r.m.s.), provided the ripple current remains below the specified values in Table 2.

The rated voltage U_R (d.c.) in the temperature range -40 to +85 °C is 63 V, independent of polarity.

Ripple current

The maximum permissible r.m.s. ripple current at 100 Hz and $T_{amb} = 85$ °C is given in Table 2.

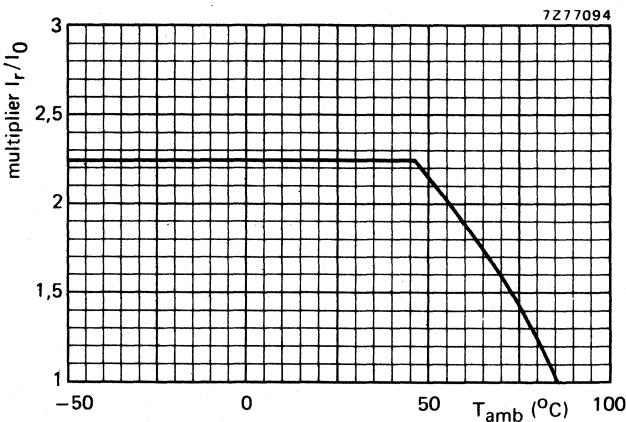


Fig. 4 Typical ripple current as a function of ambient temperature; I_0 = ripple current at 85 °C and 100 Hz.

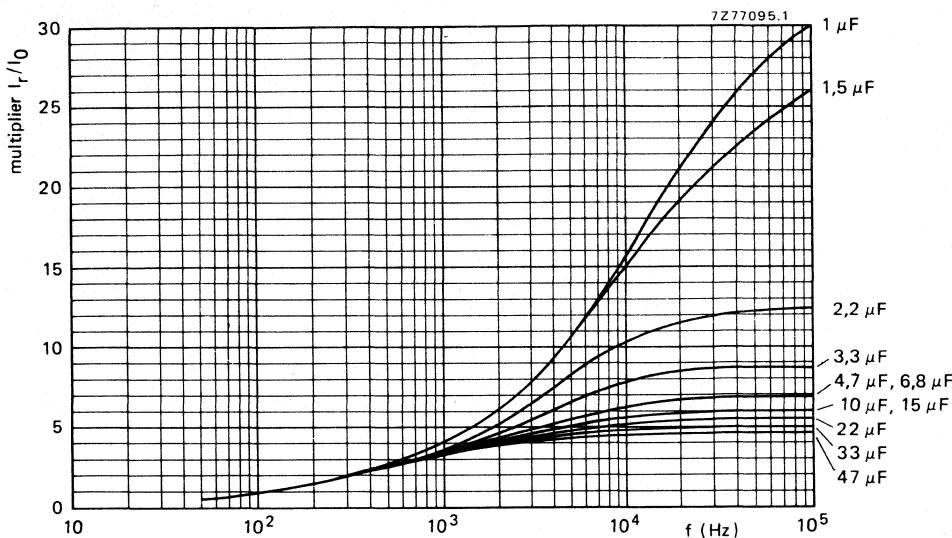


Fig. 5 Typical ripple current as a function of frequency; I_0 = ripple current at 85 °C and 100 Hz.

Leakage current

The maximum leakage current, when the case is at negative potential with respect to the other connection, 5 min after application of the rated voltage at $T_{\text{amb}} = 20$ to 25 °C is given in Table 2.

The maximum leakage current, when the case is at positive potential with respect to the other connection, may be up to 100 μA higher than the values given in Table 2.

If the leakage current is too high, owing to prolonged storage and/or storage at an excessive temperature, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Equivalent series resistance (ESR)

The ESR at 100 Hz and $T_{\text{amb}} = 25$ °C, measured by means of a four-terminal circuit (Thomson circuit) is given in Table 2.

For ESR at different frequencies, see graphs on the next page.

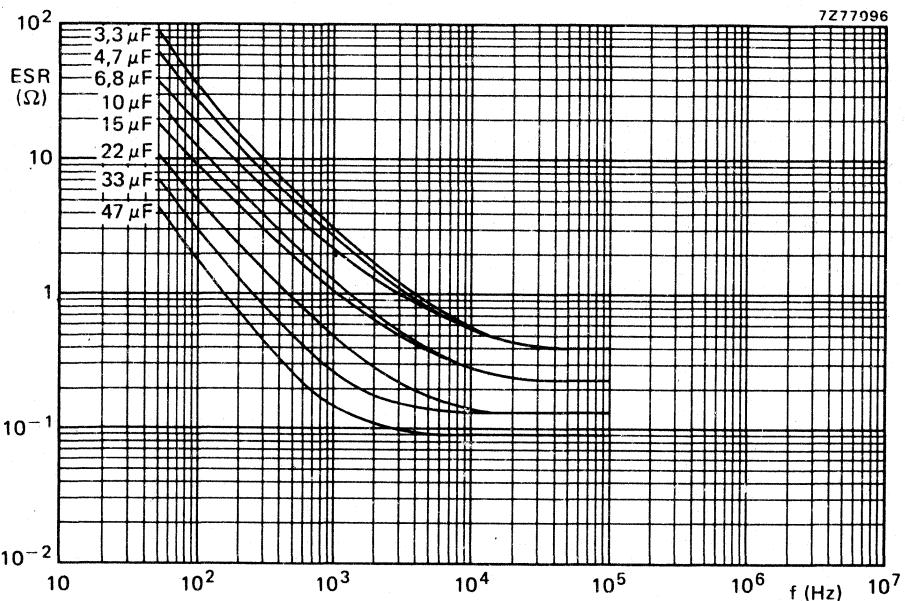


Fig. 6 Typical ESR as a function of frequency at 25 °C.

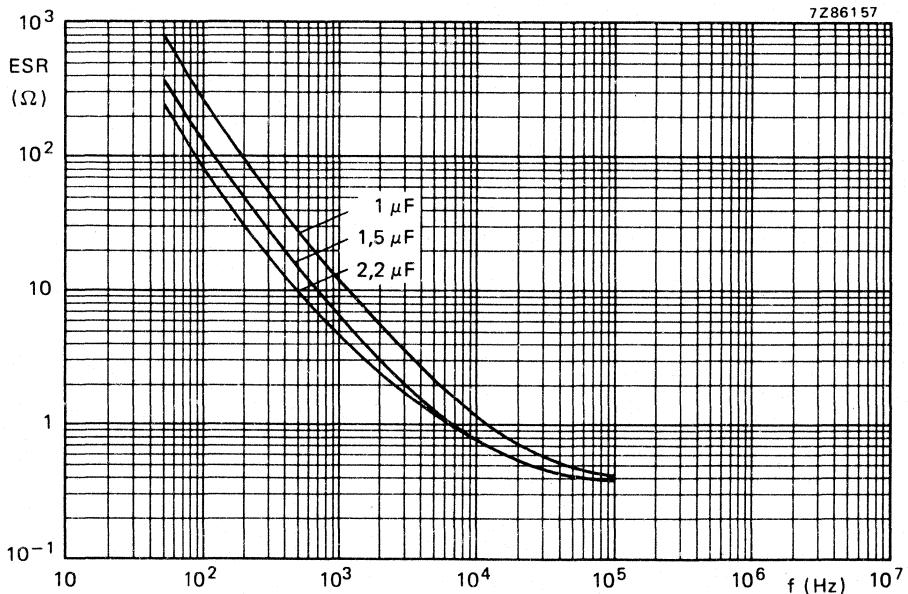


Fig. 7 Typical ESR as a function of frequency at 25 °C.

Impedance

Impedance at $T_{amb} = 25^{\circ}\text{C}$ measured by means of a four-terminal circuit (Thomson circuit).

7Z77097.1

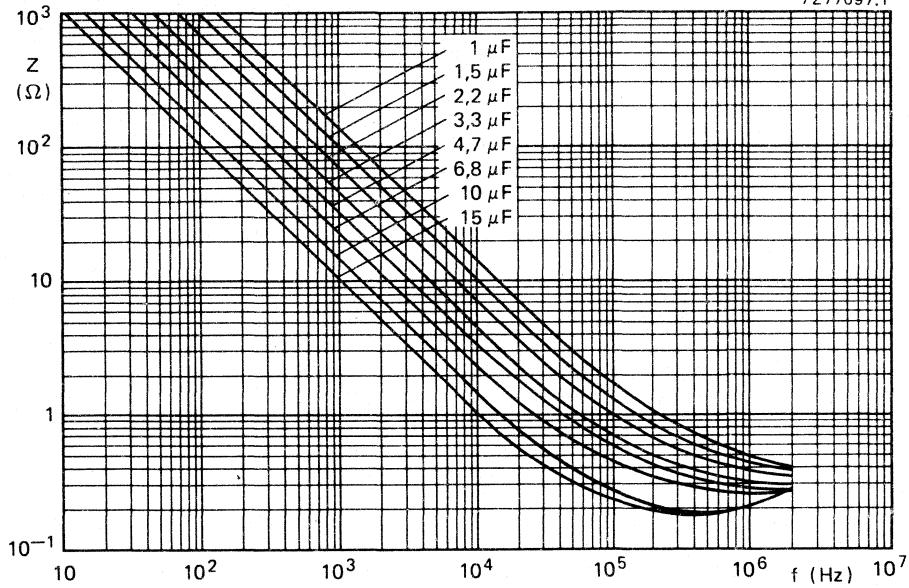


Fig. 8 Typical impedance as a function of frequency at 25 °C.

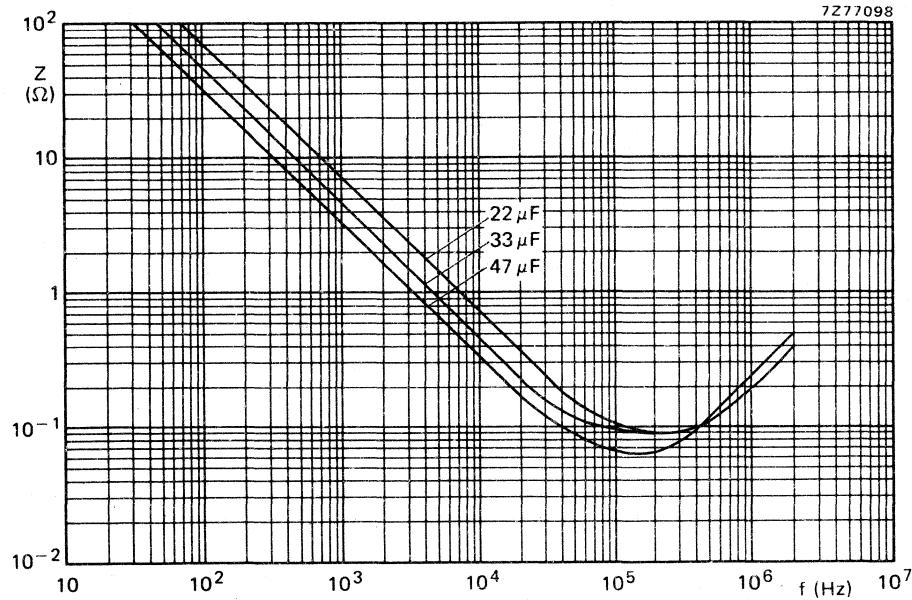


Fig. 9 Typical impedance as a function of frequency at 25 °C.

OPERATIONAL DATA

Category temperature range -40 to +85 °C

PACKING

The capacitors are packed in boxes of 200.

TEST AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the exception of IEC384-4 sub clause 9.14, and the figures of $\tan \delta$, for which the following is valid.

IEC384-4 sub clause 9.14.

IEC68-2 test method: no reference.

Name of test: Endurance

Procedure a: 5000 h at 85 °C, rated d.c. voltage applied in any direction.

Requirements: no visible damage, no leakage of electrolyte, leakage current at applied d.c. voltage in applied direction \leq stated limit, $ESR \leq 1,3 \times$ stated limit, $\Delta C/C \leq 15\%$, ratio of impedances at 10 kHz before and after test ≤ 2 , insulation resistance $> 100 M\Omega$, no breakdown or flashover.

Procedure b: 5000 h at 85 °C, rated ripple current applied, no d.c. voltage applied.


Requirements: no visible damage, no leakage of electrolyte, $ESR \leq 2 \times$ stated limit, $\Delta C/C \leq 15\%$, ratio of impedances at 10 kHz before and after test ≤ 2 , insulation resistance $> 100 M\Omega$, no breakdown or flashover.

In this data sheet no value is given for $\tan \delta$; where in the tests and requirements $\tan \delta$ is mentioned, ESR must be read instead.

Note: Capacitors 2222 039 are small types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads or single ended
- Long life
- General and industrial applications

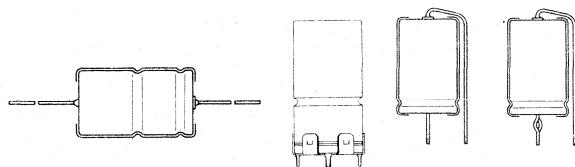

QUICK REFERENCE DATA

Nominal capacitance range	1 to 220 μF
Tolerance on nominal capacitance	-10 to +50%
Rated voltage range, U_R (R5 series)	160 to 385 V
Category temperature range	-40 to +85 °C
Endurance test at 85 °C	2000 h
case sizes 4 to 7	5000 h
case sizes 00 to 05	
Basic specifications	IEC 384-4, type 1, long-life grade DIN 41240
Climatic category	
IEC 68	40/085/56
DIN 40040	GPF

Selection chart for $C_{\text{nom}} \cdot U_R$ and relevant case sizes.

C_{nom} μF	U _R (V)			
	160	250	350	385
1				4
2,2		4		5
4,7	4	5	6	7
6,8			00	00
10	5	00/7	01	01
15		01	01	02
22	00/7	01	02	03
33	01	02	03	04
47	02	03	04	04
68	02	04	05	05
100	03	05		
150	04			
220	05			

case size	nominal dimensions (mm)	series number	
4	\emptyset 6,5 x 18	041	miniature
5	\emptyset 8 x 18		
6	\emptyset 10 x 18		
7	\emptyset 10 x 25		
00	\emptyset 10 x 30	042	small
01	\emptyset 12,5 x 30		
02	\emptyset 15 x 30		
03	\emptyset 18 x 30		
04	\emptyset 18 x 40	043	
05	\emptyset 21 x 40		

2222 041
2222 042
2222 043

APPLICATION

For smoothing, coupling and decoupling purposes in circuits where a high voltage is required. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

DESCRIPTION

The capacitor has etched aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitor is available in 4 styles, all with soldered-copper leads.

Style 1: axial leads; all case sizes; case sizes 4 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 03, 04 and 05.

Style 3: single ended; case sizes 4 to 7 and 00 to 02.

Style 4: single ended with self-locking lead; case sizes 4 to 7; non-preferred.

MECHANICAL DATA

Dimensions in mm

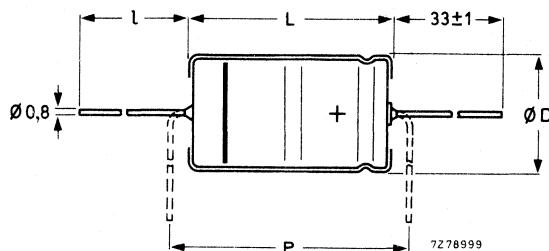


Fig. 1 Style 1; see Table 1a for dimensions D, L, I and P.

Table 1a

case size	style 1						mass approx. g
	I	D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	
4	*	6,5	18,0	6,9	18,5	25	1,3
5	*	8,0	18,0	8,5	18,5	25	1,7
6	*	10,0	18,0	10,5	18,5	25	2,5
7	*	10,0	25,0	10,5	25,0	30	3,3
00	55 ± 1	10,0	30,0	10,5	30,5	35,0	4,0
01	55 ± 1	12,5	30,0	13,0	30,5	35,0	6,3
02	55 ± 1	15,0	30,0	15,5	30,5	35,0	8,2
03	55 ± 1	18,0	30,0	18,5	30,5	35,0	10,9
04	34 ± 1	18,0	40,0	18,5	41,5	45,0	14
05	34 ± 1	21,0	40,0	21,5	41,5	45,0	19

* Case sizes 4 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).

2222 041
2222 042
2222 043

Aluminium electrolytic capacitors

Table 1b

case size	style 2						mass approx. g
	d ₁	d ₂	D ₁	D _{2max}	D ₃	L	
03	0,8	1 + 0,1	18,0	20,5	18,5 ± 0,2	31 ± 1	11,5
04	1,0	1,3 + 0,1	18,0	20,5	18,5 ± 0,2	42 ± 1	15
05	1,0	1,3 + 0,1	21,0	23,5	21,5 ± 0,2	42 ± 1	20

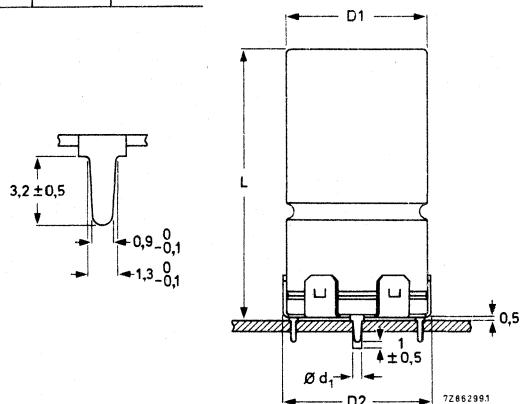



Fig. 2 Style 2; see Table 1b for dimensions d₁, d₂, D₁, D₂, D₃ and L.

Table 1c

case size	d	style 3			mass approx. g
		D _{max}	L _{max}	P	
4	0,8	6,9	21,5	5 -10	1,2
5	0,8	8,5	21,5	5 -10	1,6
6	0,8	10,5	21,5	7,5-12,5	2,3
7	0,8	10,5	28,0	7,5-12,5	3,1
00	0,8	10,5	34,0	7,5-12,5	3,8
01	0,8	13,0	34,0	7,5-12,5	6,1
02	0,8	15,5	34,0	10,0-15,0	8,0


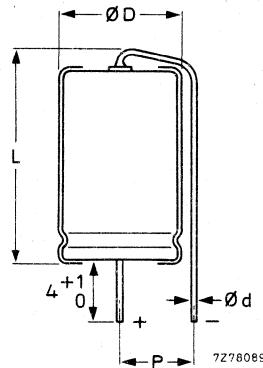


Fig. 3 Style 3 see Table 1c for dimensions d, D, L and P.

2222 041
2222 042
2222 043

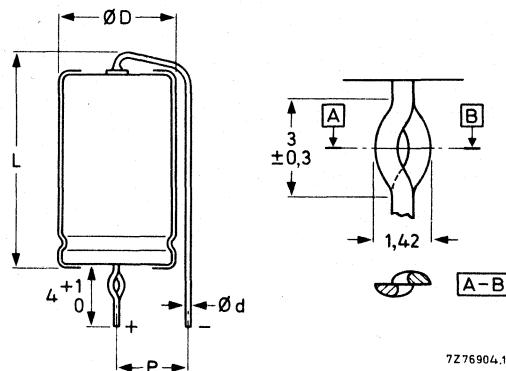

7Z76904.1

Fig. 4 Style 4; non-preferred; see Table 1d for dimensions d, D, L and P.

Table 1d

case size	d	style 4			mass approx. g
		D _{max}	L _{max}	P	
4	0,8	6,9	21,5	5 -10	1,2
5	0,8	8,5	21,5	5 -10	1,6
6	0,8	10,5	21,5	7,5-12,5	2,3
7	0,8	10,5	28,0	7,5-12,5	3,1

Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal.

Mounting

The diameter of the holes in the printed-wiring board for styles 1, 3 and 4 is $1 + 0,1$ mm, except that of the hole for the anode lead of style 4 capacitors: $1,3 + 0,1$ mm.

The hole diameter for style 2 is $1,3 + 0,1$ mm, except that for the anode pin of case size 03: $1 + 0,1$ mm.

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%. (See also the relevant paragraphs.)

U_R	nom. cap.	max. r.m.s. ripple current at $T_{amb} = 85 \text{ }^{\circ}\text{C}$	max. leakage current at U_R after 1 min	max. ESR	max. $\tan \delta$	typ. impedance at 10 KHz	case size	catalogue number*
V	μF	mA	μA	Ω		Ω		2222 followed by
160	4,7	26	38	53,2	0,15	26	4	041.1478
	10	41	68	25,0	0,15	12	5	041.1109
	22	77	126	11,4	0,15	5,5	7	041.1229
	22	106	42	6,8	0,10	1,3	00	042.1229
	33	146	58	4,5	0,10	1,0	01	042.1339
	47	194	78	3,2	0,10	0,66	02	042.1479
	68	233	108	2,2	0,10	0,48	02	042.1689
	100	313	154	1,5	0,10	0,37	03	042.1101
	150	433	226	1,0	0,10	0,21	04	043.1151
	220	571	327	0,7	0,10	0,18	05	043.1221
	250	2,2	18	132	0,18	50	4	041.3228
	4,7	29	55	61,7	0,18	23	5	041.3478
250	10	55	95	29	0,18	11	7	041.3109
	10	72	33	15	0,10	4,2	00	042.3109
	15	100	44	10	0,10	2,8	01	042.3159
	22	120	60	6,8	0,10	2,2	01	042.3229
	33	162	84	4,5	0,10	1,4	02	042.3339
	47	215	116	3,2	0,10	0,75	03	042.3479
	68	291	163	2,2	0,10	0,4	04	043.3689
	100	385	235	1,5	0,10	0,28	05	043.3101
	350	4,7	32	68,1	0,20	21	6	041.5478
	6,8	60	32	22	0,10	5,0	00	042.5688
350	10	81	42	15	0,10	4,2	01	042.5109
	15	100	57	10	0,10	2,8	01	042.5159
	22	133	79	6,8	0,10	2,1	02	042.5229
	33	162	114	4,5	0,10	0,9	03	042.5339
	47	242	158	3,2	0,10	0,7	04	043.5479
	68	317	224	2,2	0,10	0,4	05	043.5689
	385	1	12	335	0,20	100	4	041.8108
	2,2	23	42	152	0,20	45	5	041.8228
385	4,7	43	71	71,3	0,20	21	7	041.8478
	6,8	60	34	22	0,10	5,0	00	042.8688
	10	81	45	15	0,10	4,2	01	042.8109
	15	110	62	10	0,10	2,3	02	042.8159
	22	147	86	6,8	0,10	2,0	03	042.8229
	33	203	124	4,5	0,10	0,8	04	043.8339
	47	242	173	3,2	0,10	0,7	04	043.8479
	68	317	246	2,2	0,10	0,4	05	043.8689

* Note is on the next page.

2222 041
2222 042
2222 043

- * Replace dot in catalogue number by:
1 for style 1, case sizes 00 to 05, supplied in box;
2 for style 1 on bandoliers on reel; } case sizes 4 to 7
3 for style 1 on bandoliers in box; }
4 for style 2, case sizes 03, 04, 05;
8 for style 3;
7 for style 4.

Capacitance

Nominal capacitance values at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to + 50%

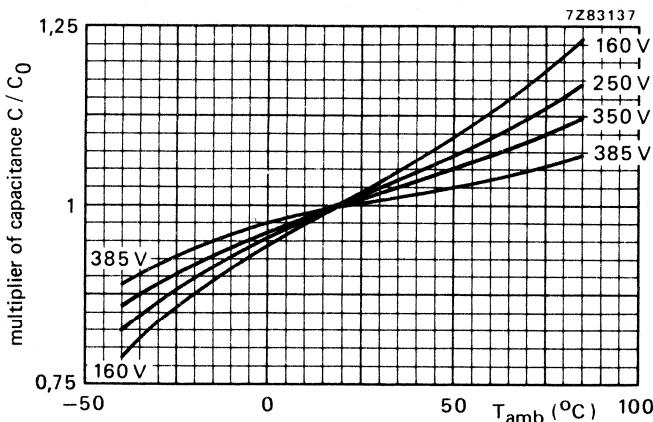


Fig. 5 Multiplier of capacitance as a function of ambient temperature; **case sizes 4 to 7**;
 C_0 = capacitance at 20°C , 100 Hz.

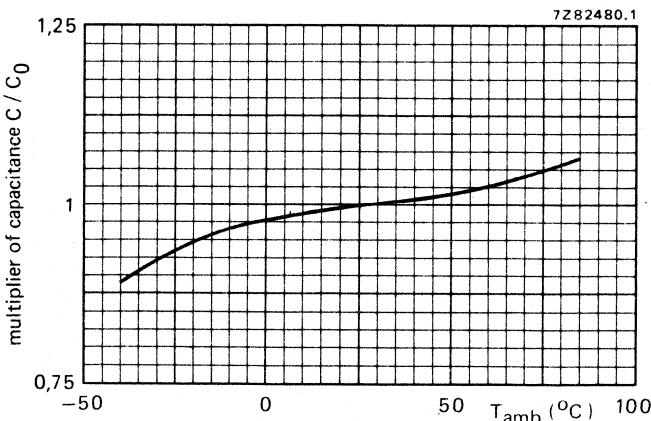


Fig. 6 Multiplier of capacitance as a function of ambient temperature; **case sizes 00 to 05**;
 C_0 = capacitance at 25°C , 100 Hz.

Voltage

Rated voltage = max. permissible voltage

at < 40 °C

at 40 to 85 °C

$$\frac{1,1 \times U_R}{U_R}$$

Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met:

a) max. (d.c. + peak a.c.) voltage

b) max. peak a.c. voltage without d.c. voltage applied

c) momentary value of applied voltage

$$U_R$$

$$1 \text{ V}$$

between U_R and -1 V

Surge voltage = max. permissible voltage for short periods

for $U_R = 160 \text{ V}$ or 250 V

$$1,15 \times U_R$$

for $U_R = 350 \text{ V}$ or 385 V

$$1,1 \times U_R$$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at 85 °C for short periods


$$1 \text{ V}$$

Ripple current **

Maximum permissible r.m.s. ripple current at

100 Hz and $T_{amb} = 85 \text{ }^{\circ}\text{C}$



see Table 2

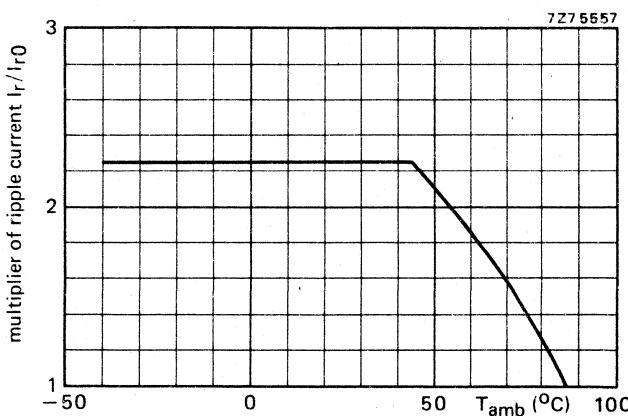Fig. 7 Multiplier of ripple current as a function of ambient temperature; I_{r0} = ripple current at $85 \text{ }^{\circ}\text{C}$, 100 Hz.

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

** Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

2222 041
2222 042
2222 043

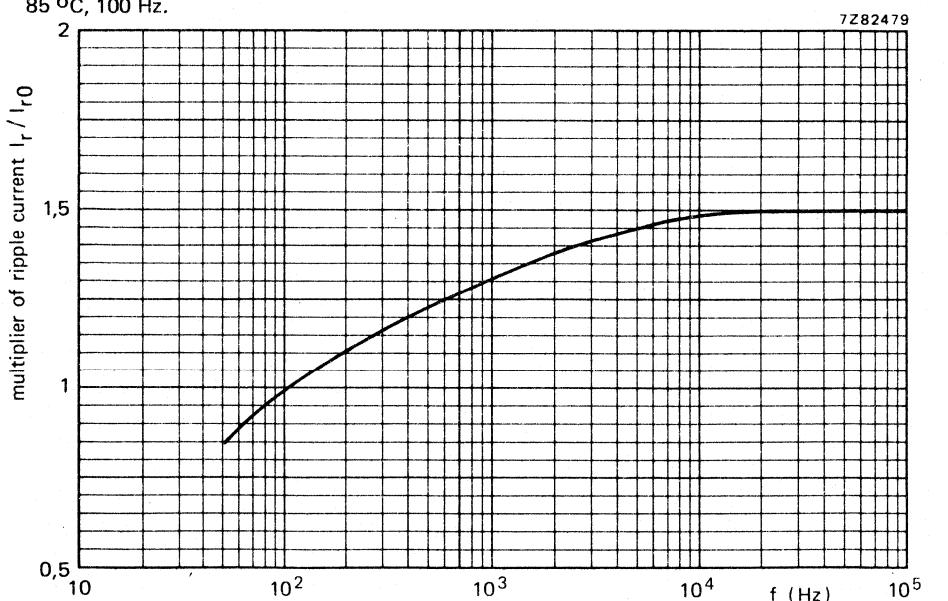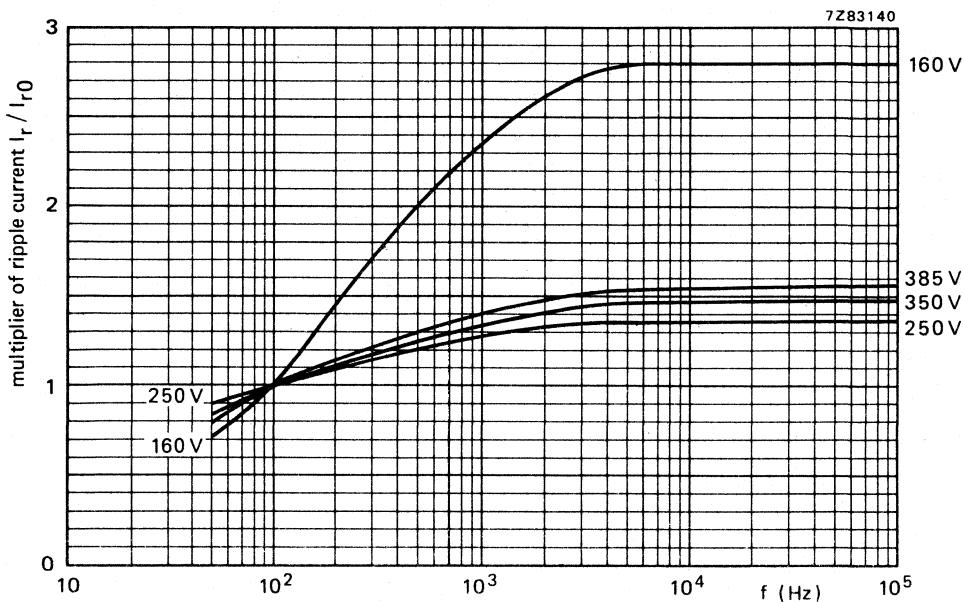

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$ = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$r_n = I_r/I_{r0}$ = multiplying factor at a same frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current **1 min** after application
of the rated voltage at $T_{amb} = 20^\circ C$
case sizes 4 to 7

see Table 2 (0,05 CU or 5 μA)
for $CU \leq 1000 \mu C$; 0,03 CU
+ 20 μA for $CU > 1000 \mu C$

see Table 2 (0,009 CU + 10 μA)

case sizes 00 to 05

Maximum leakage current **5 min** after application
of the rated voltage at $T_{amb} = 20^\circ C$; all case sizes

0,01 CU or 1 μA (whichever is
greater) for $CU \leq 1000 \mu C$;
0,006 CU + 4 μA for
 $CU > 1000 \mu C$

If owing to prolonged storage and/or storage at an excessive temperature ($> 40^\circ C$) the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.



2222 041
2222 042
2222 043

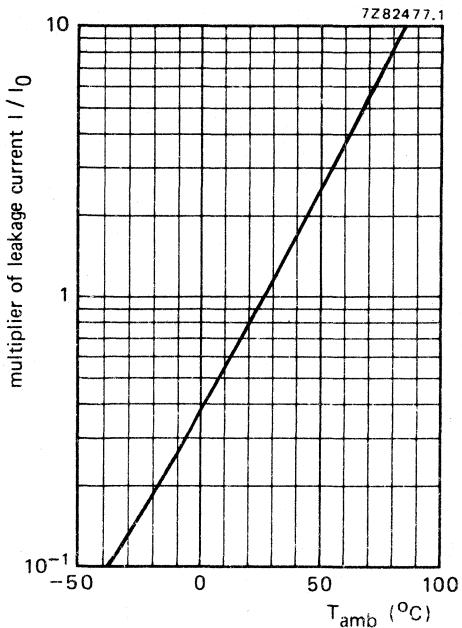


Fig. 10 Multiplier of leakage current as a function of ambient temperature; I_0 = leakage current during continuous operation at 25°C and U_R .

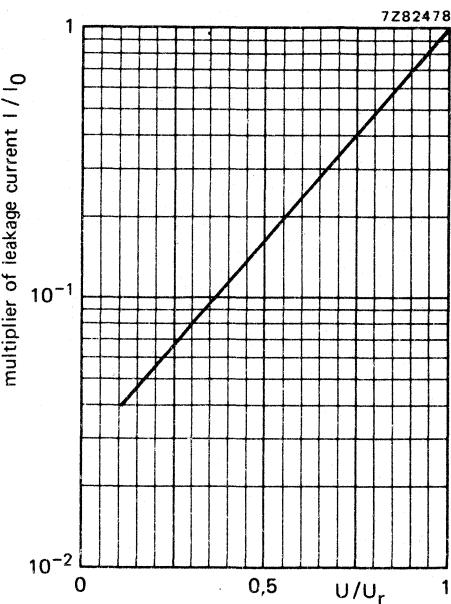


Fig. 11 Multiplier of leakage current as a function of U/U_R ; I_0 = leakage current during continuous operation at 25°C and U_R .

Equivalent series resistance (ESR)

Maximum ESR at 100 Hz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

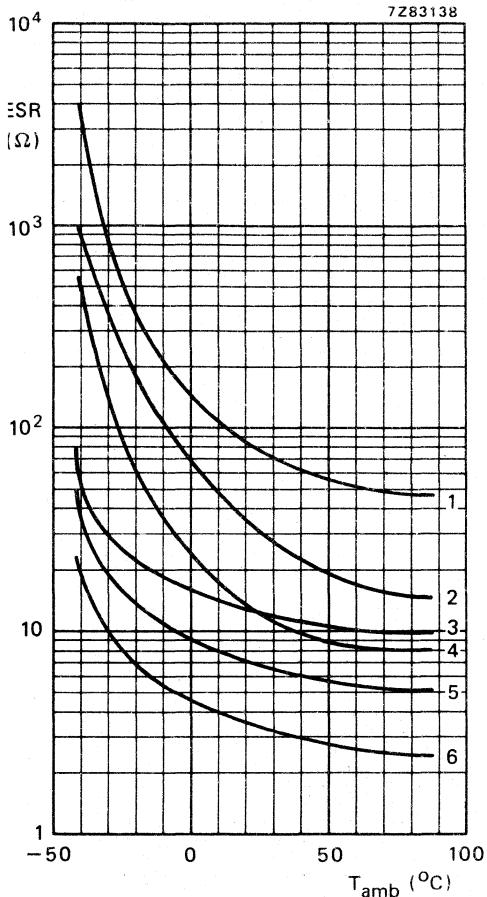


Fig. 12 Typical ESR as a function of ambient temperature at 100 Hz; case sizes 4 to 7.

Curve 1 = case size 4, 385 V;

curve 2 = case size 5, 385 V;

curve 3 = case size 4, 160 V;

curve 4 = case size 7, 385 V;

curve 5 = case size 5, 160 V;

curve 6 = case size 7, 160 V.

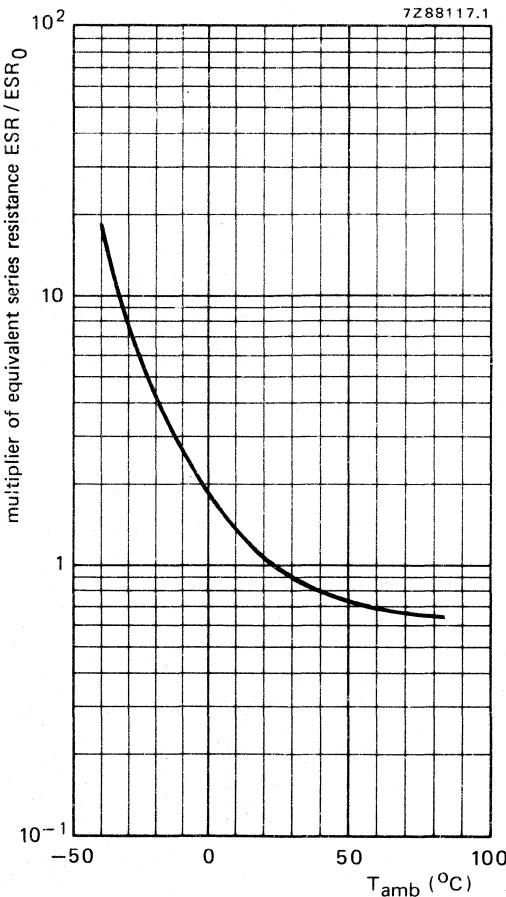


Fig. 13 Multiplier of ESR as a function of ambient temperature; case sizes 00 to 05; $\text{ESR}_0 = \text{typ. ESR at } 25^{\circ}\text{C, 100 Hz.}$

2222 041
2222 042
2222 043

7Z83139

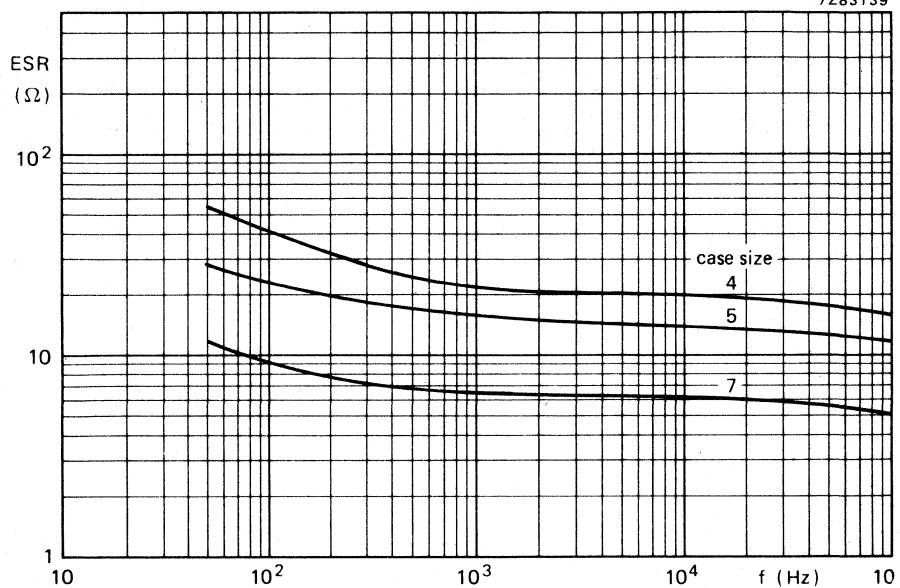


Fig. 14 Typical ESR as a function of frequency at 20 °C; $U_R = 250$ V; case sizes 4 to 7.

7Z88118

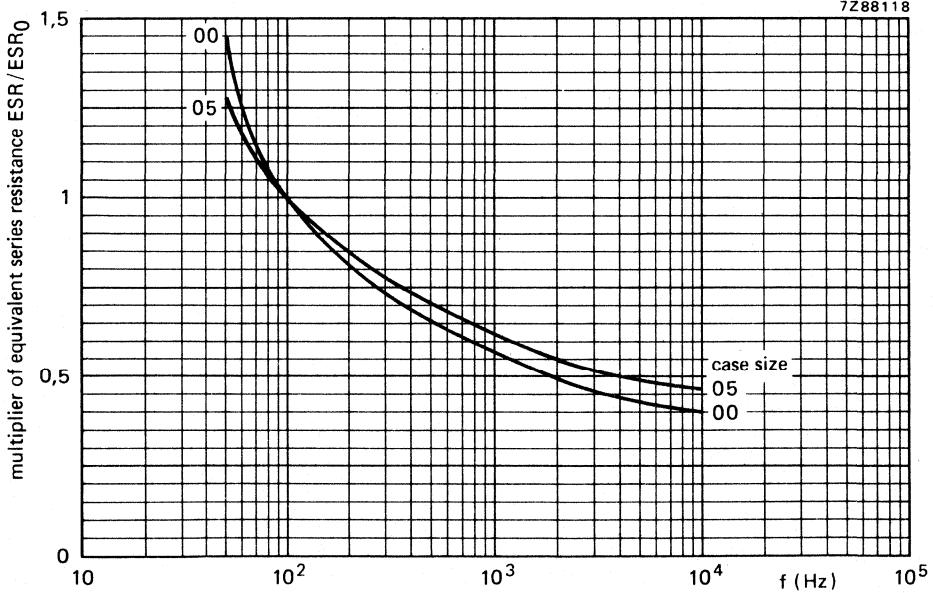


Fig. 15 Multiplier of ESR as a function of frequency; case sizes 00 to 05; ESR_0 = typ. ESR at 25 °C, 100 Hz.

Impedance

Typical impedance at 10 kHz, measured by a four-terminal circuit (Thomson circuit)

see Table 2

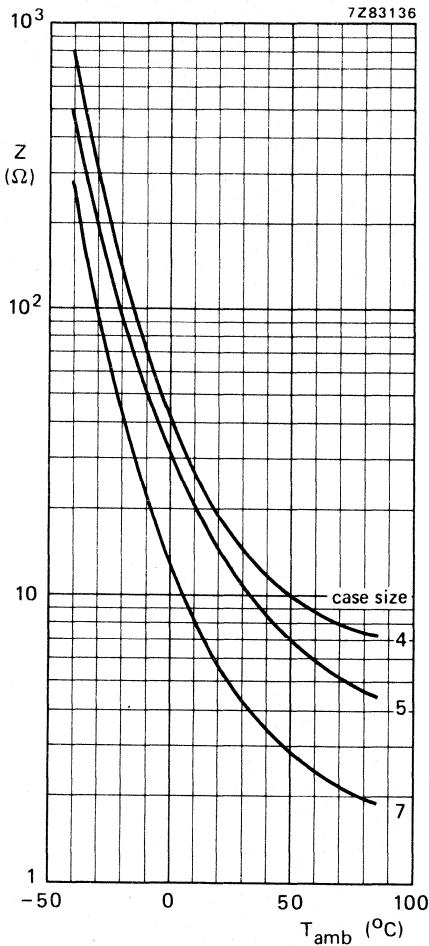


Fig. 16 Typical impedance as a function of ambient temperature at 10 kHz; $U_R = 250$ V; case sizes 4 to 7.

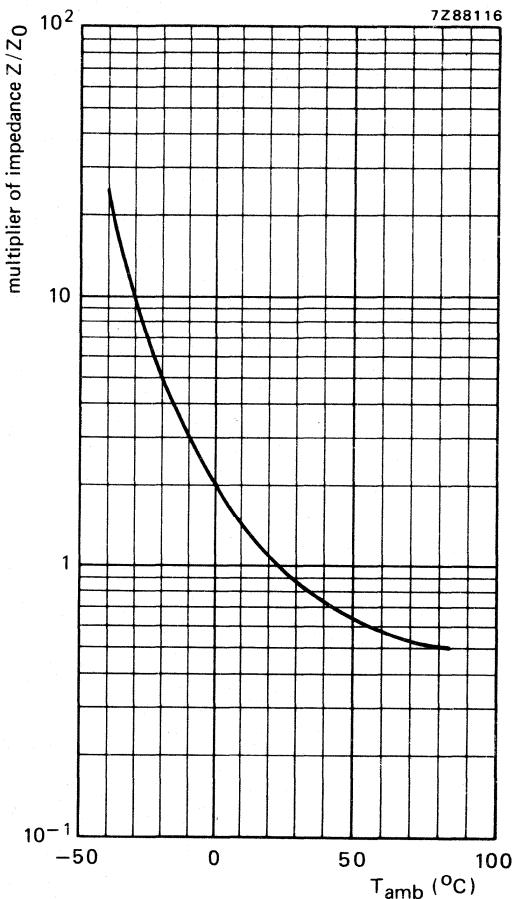


Fig. 17 Multiplier of impedance as a function of ambient temperature; case sizes 00 to 05; $Z_0 = \text{typ. impedance at } 25^\circ\text{C, } 10\text{ kHz}$ (see Table 2).

2222 041
2222 042
2222 043

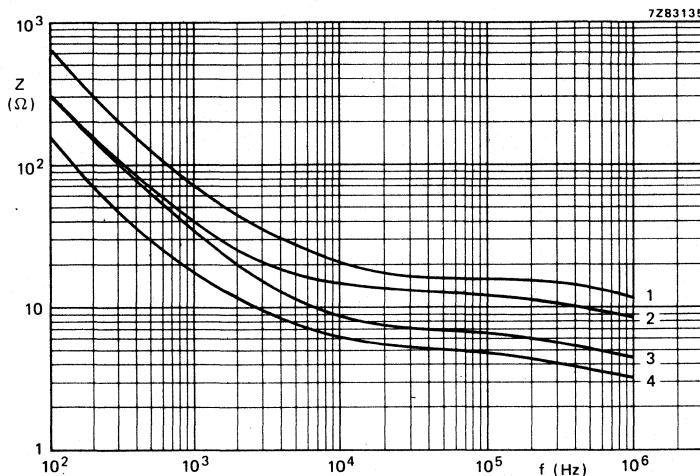


Fig. 18 Typical impedance as a function of frequency at 20 °C. Case sizes 4 to 7.

- Curve 1 = case size 4, 250 V;
curve 2 = case size 5, 250 V;
curve 3 = case size 6, 350 V;
curve 4 = case size 7, 250 V.

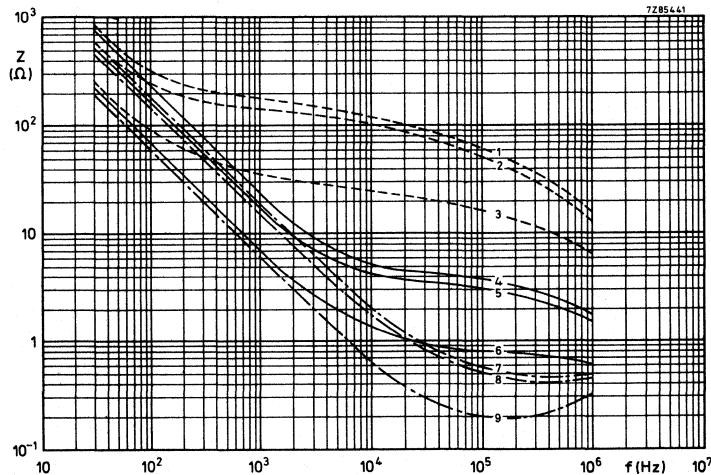


Fig. 19 Typical impedance as a function of frequency at different temperatures. Case size 00.

- Curve 1 = $6,8 \mu\text{F}$, 350/385 V; -40 °C;
curve 2 = $10 \mu\text{F}$, 250 V; -40 °C;
curve 3 = $22 \mu\text{F}$, 160 V; -40 °C;
curve 4 = $6,8 \mu\text{F}$, 350/385 V; +20 °C;
curve 5 = $10 \mu\text{F}$, 250 V; +20 °C;
curve 6 = $22 \mu\text{F}$, 160 V; +20 °C;
curve 7 = $6,8 \mu\text{F}$, 350/385 V; +85 °C;
curve 8 = $10 \mu\text{F}$, 250 V; +85 °C;
curve 9 = $22 \mu\text{F}$, 160 V; +85 °C.

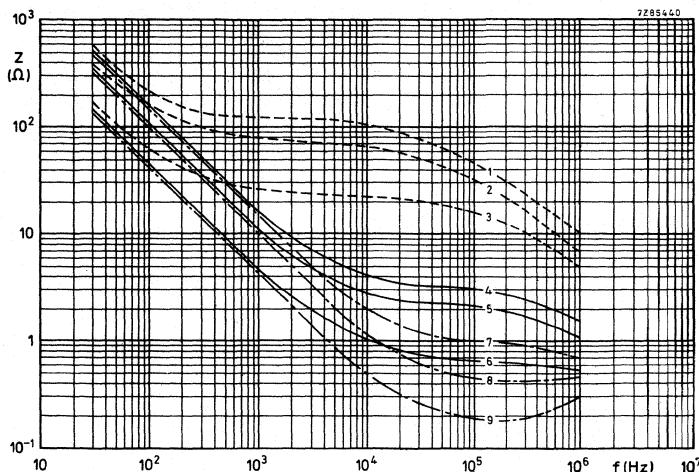


Fig. 20 Typical impedance as a function of frequency at different temperatures. Case size 01.

Curve 1 = 10 μ F, 350/385 V; -40 °C;
 curve 2 = 15 μ F, 250 V; -40 °C;
 curve 3 = 33 μ F, 160 V; -40 °C;
 curve 4 = 10 μ F, 350/385 V; +20 °C;
 curve 5 = 15 μ F, 250 V; +20 °C;
 curve 6 = 33 μ F, 160 V; +20 °C;
 curve 7 = 10 μ F, 350/385 V; +85 °C;
 curve 8 = 15 μ F, 250 V; +85 °C;
 curve 9 = 33 μ F, 160 V; +85 °C.

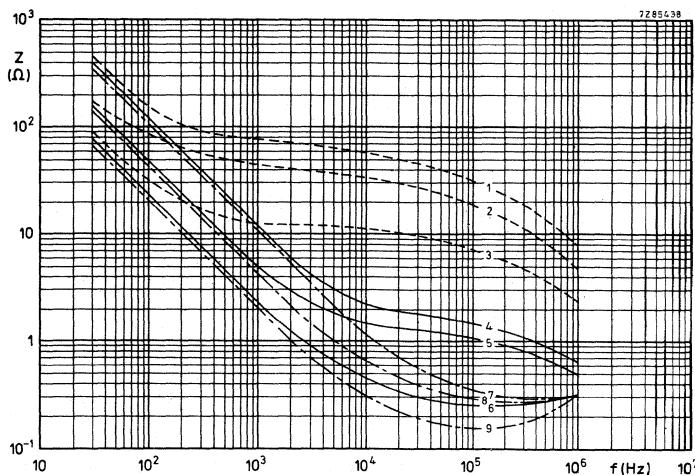


Fig. 21 Typical impedance as a function of frequency at different temperatures. Case size 02.

Curve 1 = 15 μ F, 385 V; -40 °C;
 curve 2 = 22 μ F, 250 V; -40 °C;
 curve 3 = 68 μ F, 160 V; -40 °C;
 curve 4 = 15 μ F, 385 V; +20 °C;
 curve 5 = 22 μ F, 250 V; +20 °C;
 curve 6 = 68 μ F, 160 V; +20 °C;
 curve 7 = 15 μ F, 385 V; +85 °C;
 curve 8 = 22 μ F, 250 V; +85 °C;
 curve 9 = 68 μ F, 160 V; +85 °C.

2222 041
2222 042
2222 043

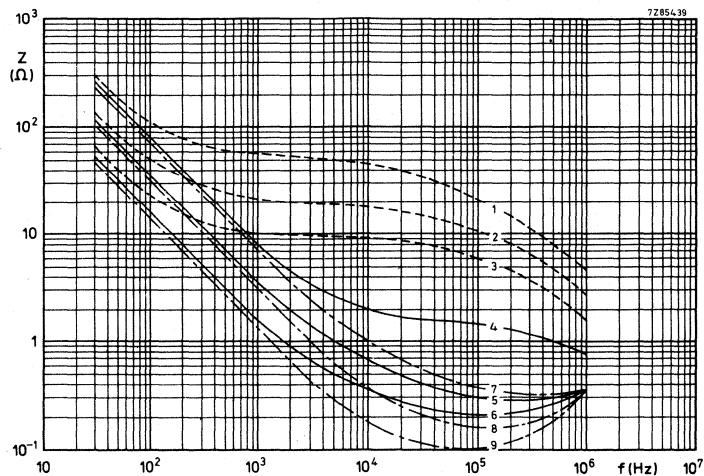


Fig. 22 Typical impedance as a function of frequency at different temperatures. Case size 03.

- Curve 1 = $22 \mu\text{F}$, 385 V; -40°C ; curve 6 = $100 \mu\text{F}$, 160 V; $+20^\circ\text{C}$;
curve 2 = $47 \mu\text{F}$, 250 V; -40°C ; curve 7 = $22 \mu\text{F}$, 385 V; $+85^\circ\text{C}$;
curve 3 = $100 \mu\text{F}$, 160 V; -40°C ; curve 8 = $47 \mu\text{F}$, 250 V; $+85^\circ\text{C}$;
curve 4 = $22 \mu\text{F}$, 385 V; $+20^\circ\text{C}$; curve 9 = $100 \mu\text{F}$, 160 V; $+85^\circ\text{C}$.
curve 5 = $47 \mu\text{F}$, 250 V; $+20^\circ\text{C}$;

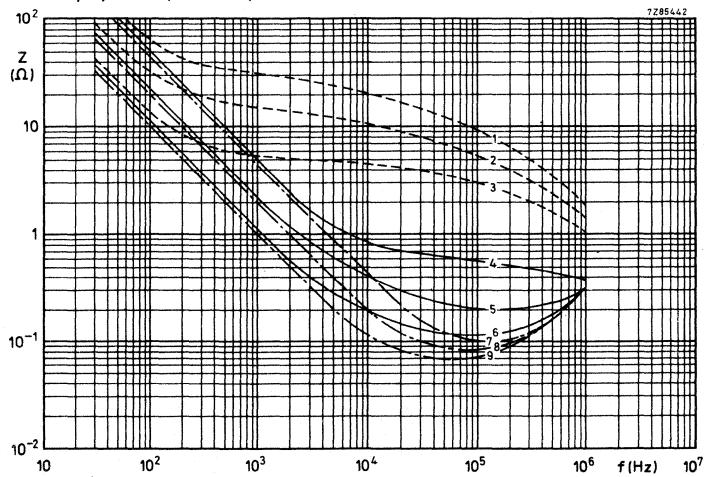


Fig. 23 Typical impedance as a function of frequency at different temperatures. Case size 04.

- Curve 1 = $33 \mu\text{F}$, 385 V; -40°C ; curve 6 = $150 \mu\text{F}$, 160 V; $+20^\circ\text{C}$;
curve 2 = $68 \mu\text{F}$, 250 V; -40°C ; curve 7 = $33 \mu\text{F}$, 385 V; $+85^\circ\text{C}$;
curve 3 = $150 \mu\text{F}$, 160 V; -40°C ; curve 8 = $68 \mu\text{F}$, 250 V; $+85^\circ\text{C}$;
curve 4 = $33 \mu\text{F}$, 385 V; $+20^\circ\text{C}$; curve 9 = $150 \mu\text{F}$, 160 V; $+85^\circ\text{C}$.
curve 5 = $68 \mu\text{F}$, 250 V; $+20^\circ\text{C}$;

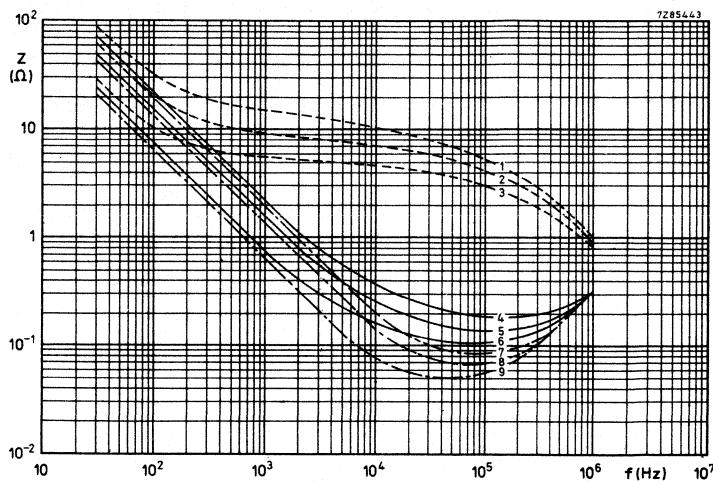


Fig. 24 Typical impedance as a function of frequency at different temperatures. Case size 05.

Curve 1 = 68 μ F, 350/385 V; -40 °C;
 curve 2 = 100 μ F, 250 V; -40 °C;
 curve 3 = 220 μ F, 160 V; -40 °C;
 curve 4 = 68 μ F, 350/385 V; +20 °C;
 curve 5 = 100 μ F, 250 V; +20 °C;

curve 6 = 220 μ F, 160 V; +20 °C;
 curve 7 = 68 μ F, 350/385 V; +85 °C;
 curve 8 = 100 μ F, 250 V; +85 °C;
 curve 9 = 220 μ F, 160 V; +85 °C.

Inductance (ESL)

Case sizes 00 and 01
 Case size 02
 Case sizes 03, 04 and 05

50 nH
 55 nH
 60 nH } typical values

OPERATIONAL DATA

Category temperature range -40 to +85 °C

Typical life time at T_{amb} = 85 °C

5000 h
 10 000 h

case sizes 4 to 7
 case sizes 00 to 05

PACKING

All capacitors are supplied in boxes; case sizes 4 to 7 of style 1 are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 3.

2222 041
2222 042
2222 043

Table 3

case size	number of capacitors	
	per box	per box or per reel (style 1, on bandoliers)
4	1000	1000
5	1000	500
6	1000	500
7	500	500
00	200	
01	200	
02	200	
03	200	
04	100	
05	100	

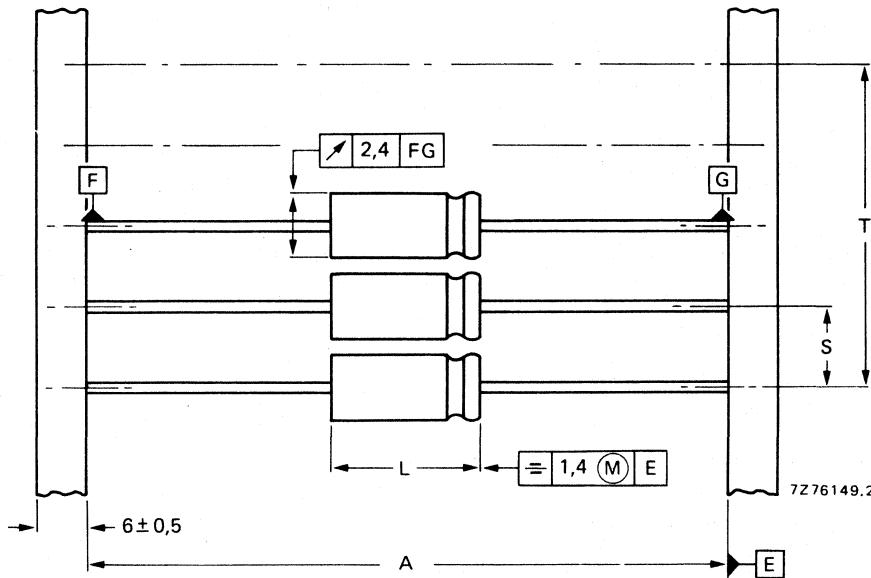


Fig. 25 Style 1 capacitors (case sizes 4 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 4 for dimensions A, S, T and L.

Table 4

Dimensions in mm

case size	A	S	T for number (n) of capacitors		L _{max}
			n < 50	50 < n < 100	
4	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
5	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
6	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	18,5
7	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	25,0

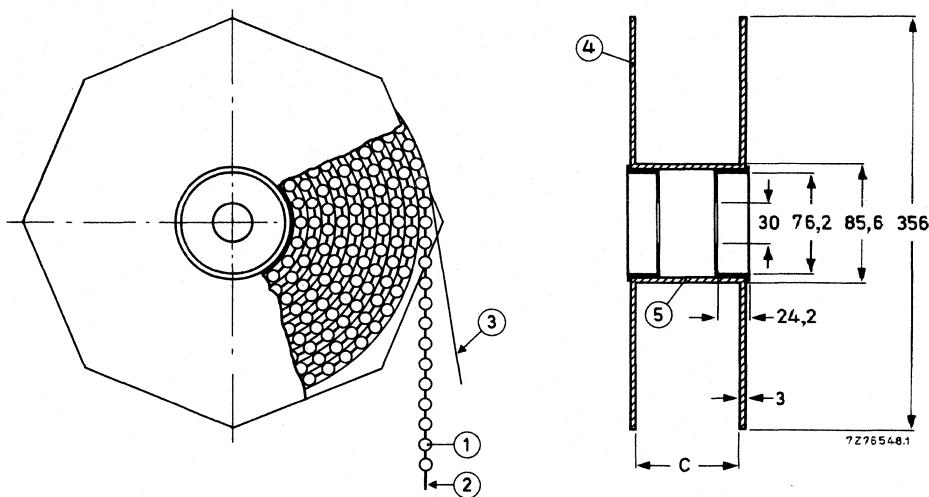


Fig. 26 Style 1 capacitors (case sizes 4 to 7) on bandoliers on reel; dimension C is 88,5 mm; the overall width of the reel is 99,5 mm.

1 = capacitor
2 = bandolier

3 = paper
4 = flange

5 = cylinder

TESTS AND REQUIREMENTS


See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 041 are miniature types, long-life grade.

Capacitors 2222 042 and 2222 043 are small types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with solder tags or printed-wiring pins
- Long life
- Industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	47 to 68 000 μ F
Tolerance on nominal capacitance	-10 to +30%
Rated voltage, U_R	10 to 385 V
Category temperature range	-40 to +85 °C
Endurance test at 85 °C, at U_R	2000 h
Basic specification	IEC 384-4, long-life grade; DIN 41240
Dimensional specification	DIN 41238
Climatic category, IEC 68	40/085/56
	GPF (56 days)
	DIN40040

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μ F	U _R (V)							
	10	16	25	40	63	100	250	385
47								1
68								2
100						1	3	
150							2	4
220						3	5/6	
330						4	7	
470					1	5/6	8	
680						2	7	
1 000				1	3	8		
1 500			1	2	4			
2 200		1	2	3	5/6			
3 300	1	2	3	4	7			
4 700	1	2	3	4	5/6	8		
6 800	2	3	4	5/6	7	9		
10 000	3	4	5/6	7	8			
15 000	4	5/6	7	8	9			
22 000	5/6	7	8	9				
33 000	7	8	9					
47 000	8	9						
68 000	9							

case size	nominal dimensions (mm)	
	versions with solder tags	versions with printed-wiring pins
1	ϕ 25 x 35	ϕ 25 x 35
2	ϕ 25 x 45	ϕ 25 x 45
3	ϕ 30 x 45	ϕ 30 x 45
4	ϕ 35 x 45	ϕ 35 x 45
5	ϕ 35 x 55	ϕ 35 x 55
6		ϕ 40 x 45
7	ϕ 40 x 55	ϕ 40 x 55
8	ϕ 40 x 75	ϕ 40 x 75
9	ϕ 40 x 105	ϕ 40 x 105

2222 050

2222 052

APPLICATION

These capacitors have low ESR and ESL values and a high resistance to shock and vibration which render them suitable for application such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.


DESCRIPTION

The resistance to shock and vibration is achieved by a special internal construction.


The capacitors are completely cold welded and charge/discharge proof. The aluminium case is fully insulated. The solder tag versions have a safety vent in the discs, the printed-wiring versions have a safety vent in the case bottom.

MECHANICAL DATA

Capacitors with solder tags

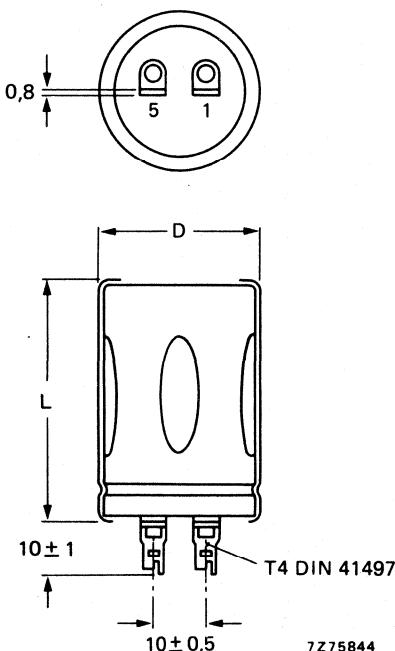

Dimensions in mm



7Z75843

Fig. 2 Bolt version.

Table 1a

case size	D	L	mass approx. g
1	25	35	25
2	25	45	30
3	30	45	40
4	35	45	55
5	35	55	65
7	40	55	85
8	40	75	115
9	40	105	160

1 = plus
5 = minus

Fig. 1.

Capacitors with printed-wiring pins


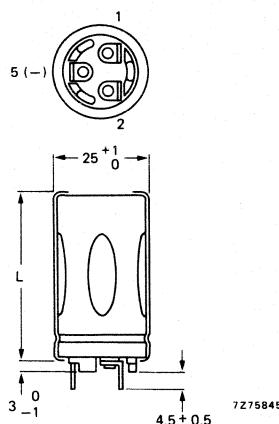


Fig. 3b. Piercing diagram viewed from component side.

Table 1b

case size	L	mass approx. g
1	35	25
2	45 + 1,3	30


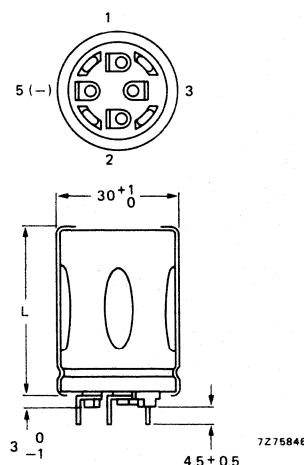


Fig. 4b. Piercing diagram viewed from component side.

Table 1c

case size	L	mass approx. g
3	45 + 1,3	40

2222 050
2222 052

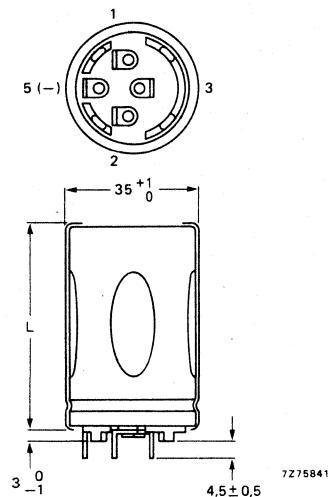


Fig. 5a.

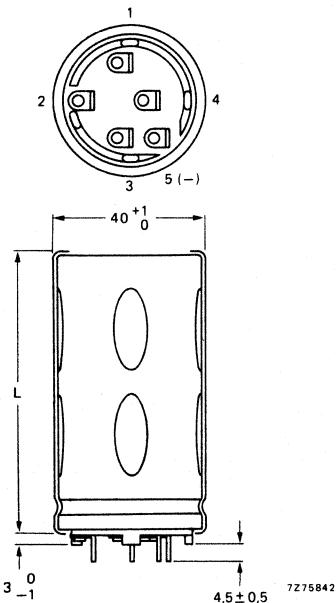


Fig. 6a.




Fig. 5b Piercing diagram viewed from component side.

Table 1d

case size	L	mass approx. g
4	45	55
5	55 + 1,3	65

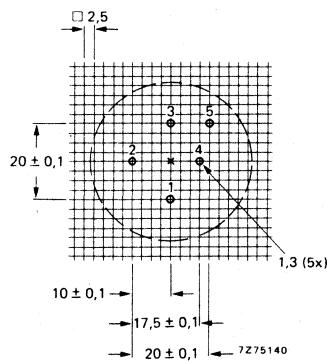


Fig. 6b Piercing diagram viewed from component side.

Table 1e

case size	L	mass approx. g
6	45	70
7	55	85
8	75 + 1,3	115
9	105	160

Marking

The capacitors are marked with: nominal capacitance, tolerance on capacitance, rated voltage, temperature range, IEC grade, catalogue number, date code (year, month) according to IEC 62, name of manufacturer, indication of production centre, polarity of the terminals and dimensional specification DIN 41238.

The terminals are marked as shown in the dimensional figures.

Mounting

The capacitors may be mounted in any position with or without a mounting clamp. When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

If the case has to be at a specified potential, it should be connected to the negative terminal only.

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Unless otherwise specified all electrical values apply at an ambient temperature of 20 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 2 (note is at the end of the table)

U _R	nom. cap.	max. r.m.s. ripple current (A) at		max. leakage current at U _R after 5 min (mA)	typ. tan δ	max. ESR	max. impedance at 10 kHz	case size	catalogue number* 2222 followed by
V	μF	100 Hz, 85 °C	20 kHz, 70 °C			mΩ	mΩ		
10	4 700	2,4	4,6	0,28	0,19	74	50	1	050 . 4472
	6 800	3,2	6,1	0,41	0,18	51	37	2	. 4682
	10 000	3,8	7,2	0,60	0,24	39	29	3	. 4103
	15 000	4,1	7,8	0,90	0,33	35	26	4	. 4153
	22 000	5,0	9,5	1,32	0,37	27	21	5	. 4223
	22 000	4,2	8,0	1,32	0,48	36	27	6	. 4223
	33 000	5,0	9,5	1,98	0,58	29	22	7	. 4333
	47 000	6,8	12,9	2,82	0,58	20	17	8	. 4473
	68 000	9,2	17,5	4,08	0,62	15	14	9	. 4683
16	3 300	2,4	4,6	0,32	0,13	75	50	1	. 5332
	4 700	3,1	5,9	0,45	0,14	52	37	2	. 5472
	6 800	3,7	7,0	0,65	0,17	40	30	3	. 5682
	10 000	4,1	7,8	0,96	0,22	36	27	4	. 5103
	15 000	5,0	9,5	1,44	0,25	28	21	5	. 5153
	15 000	4,2	8,0	1,44	0,33	36	27	6	. 5153
	22 000	5,0	9,5	2,12	0,38	29	22	7	. 5223
	33 000	6,7	12,7	3,17	0,41	20	17	8	. 5333
	47 000	9,1	17,3	4,51	0,42	15	14	9	. 5473
25	2 200	2,3	4,4	0,33	0,10	78	52	1	. 6222
	3 300	3,1	5,9	0,49	0,11	53	38	2	. 6332
	4 700	3,7	7,0	0,70	0,12	42	31	3	. 6472
	6 800	4,1	7,8	1,02	0,15	37	28	4	. 6682
	10 000	5,0	9,5	1,50	0,17	28	21	5	. 6103
	10 000	4,2	8,0	1,50	0,22	36	27	6	. 6103
	15 000	5,0	9,5	2,25	0,26	29	22	7	. 6153
	22 000	6,8	12,9	3,30	0,27	20	17	8	. 6223
	33 000	9,2	17,5	4,95	0,30	15	14	9	. 6333
40	1 500	2,0	3,8	0,36	0,085	112	68	1	. 7152
	2 200	2,7	5,1	0,53	0,087	76	51	2	. 7222
	3 300	3,3	6,3	0,79	0,10	57	41	3	. 7332
	4 700	3,8	7,2	1,13	0,12	48	35	4	. 7472
	6 800	4,7	8,9	1,64	0,13	36	27	5	. 7682
	6 800	4,1	7,8	1,64	0,17	45	33	6	. 7682
	10 000	4,9	9,3	2,40	0,19	35	27	7	. 7103
	15 000	6,6	12,5	3,60	0,21	25	20	8	. 7153
	22 000	9,0	17,1	5,28	0,22	18	16	9	. 7223

Table 2 (continued)

U_R	nom. cap.	max. r.m.s. ripple current (A) at		max. leakage current at U_R after 5 min (mA)	typ. $\tan \delta$	max. ESR	max. impedance at 10 kHz	case size	catalogue number* 2222 followed by
V	μF	100 Hz, 85 °C	20 kHz, 70 °C			$m\Omega$	$m\Omega$		
63	1 000	1,8	3,4	0,38	0,064	122	74	1	050 . 8102
	1 500	2,5	4,7	0,57	0,065	83	54	2	. 8152
	2 200	3,1	5,9	0,83	0,076	57	41	3	. 8222
	3 300	3,6	6,8	1,25	0,094	48	35	4	. 8332
	4 700	4,4	8,3	1,78	0,10	36	27	5	. 8472
	4 700	3,8	7,2	1,78	0,13	45	33	6	. 8472
	6 800	4,7	8,9	2,57	0,14	35	27	7	. 8682
	10 000	6,2	11,8	3,78	0,15	25	20	8	. 8103
	15 000	8,5	16,1	5,67	0,16	18	16	9	. 8153
	470	1,2	2,3	0,28	0,086	342	300	1	. 9471
100	680	1,7	3,2	0,41	0,087	229	210	2	. 9681
	1 000	2,2	4,2	0,60	0,092	160	150	3	. 9102
	1 500	2,6	4,9	0,90	0,10	117	120	4	. 9152
	2 200	3,2	6,1	1,32	0,11	84	90	5	. 9222
	2 200	3,0	5,7	1,32	0,12	96	110	6	. 9222
	3 300	3,6	6,8	1,98	0,14	70	75	7	. 9332
	4 700	5,0	9,5	2,82	0,13	49	55	8	. 9472
	6 800	6,9	13,1	4,08	0,14	34	40	9	. 9682
	100	0,6	1,15	150	0,085	1800	1300	1	052 . 3101
	150	0,8	1,5	230	0,08	1100	850	2	. 3151
250	220	1,0	1,9	330	0,08	750	550	3	. 3221
	330	1,4	2,65	490	0,08	500	400	4	. 3331
	470	1,8	3,4	700	0,08	360	290	5	. 3471
	470	1,8	3,4	700	0,095	420	350	6	. 3471
	680	2,3	4,4	1020	0,08	250	190	7	. 3681
	1 000	3,0	5,7	1500	0,08	170	140	8	. 3102
	47	0,4	0,75	110	0,065	2800	2200	1	. 8479
	68	0,6	1,15	160	0,055	1700	1350	2	. 8689
	100	0,8	1,5	230	0,055	1100	850	3	. 8101
	150	1,0	1,9	340	0,055	725	525	4	. 8151
385	220	1,3	2,45	500	0,055	500	350	5	. 8221
	220	1,3	2,45	500	0,065	600	420	6	. 8221
	330	1,7	3,2	750	0,055	340	230	7	. 8331
	470	2,8	5,3	1060	0,055	240	160	8	. 8471

* To complete the catalogue number, replace dot (8th digit) by:

1 = solder tag version;

4 = printed-wiring version, case size 6 only;

5 = printed-wiring version, except case size 6;

6 = solder tag, bolt version.

Capacitance

Nominal capacitance values at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to + 30%

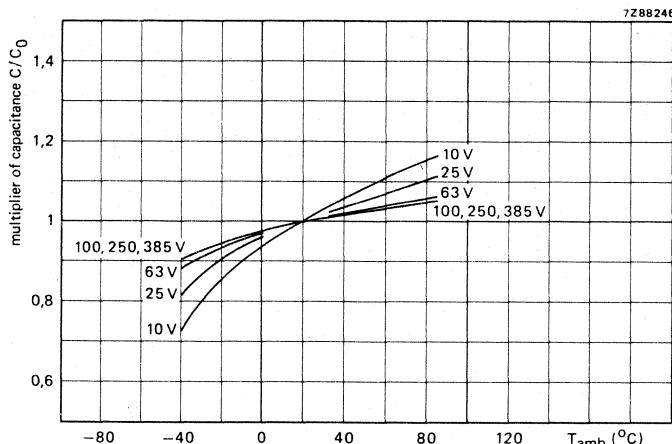


Fig. 7 Multiplier of capacitance as a function of ambient temperature; C_0 = capacitance at 25°C , 100 Hz.

Voltage

Rated voltage = max. permissible voltage

$< 50^{\circ}\text{C}$	$50 \text{ to } 85^{\circ}\text{C}$
$1,1 \times U_R$	U_R

Ripple voltage* = max. permissible a.c. voltage providing the following conditions are met:

- (a) max. positive voltage on anode (d.c. + peak a.c.)
- (b) max. positive voltage on cathode (reverse voltage)

$\leq 1,1 \times U_R$	$\leq U_R$
2 V	2 V

Surge voltage = max. permissible voltage at the maximum category temperature for short periods

10 to 100 V versions

$1,25 \times U_R$

250 V version

$1,15 \times U_R$

385 V version

$1,1 \times U_R$

$1,15 \times U_R$

$1,15 \times U_R$

$1,1 \times U_R$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

2 V

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current*

Maximum permissible r.m.s. ripple current

at 100 Hz and $T_{amb} = 85^\circ C$ at 20 kHz and $T_{amb} = 70^\circ C$

at 100 Hz and other temperatures

at other frequencies and $T_{amb} = 85^\circ C$

see Table 2

see Table 2

see Table 3

see Table 4

Table 3

ambient temperature $^\circ C$	multiplier of max. ripple current
85	1,00
80	1,22
75	1,41
70	1,58
65	1,73
60	1,87
55	2,00
50	2,12
45	2,24
≤ 40	2,35

Table 4

frequency Hz	multiplier of max. ripple current, \sqrt{r}
50	0,83
100	1,00
200	1,10
400	1,15
1000	1,19
≥ 2000	1,20

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$ = maximum ripple current at 100 Hz and applicable ambient temperature

I_n = ripple current at a certain frequency

$\sqrt{r_n}$ = multiplying factor at same frequency (Table 4).

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

2222 050
2222 052

Leakage current

Maximum leakage current 5 min after application
of the rated voltage at $T_{amb} = 20^{\circ}\text{C}$

see Table 2 (0,006 CU + 4 μA)

Maximum leakage current 15 min after application
of the rated voltage

at $T_{amb} = 20^{\circ}\text{C}$

0,125 x value stated in Table 2

at $T_{amb} = 85^{\circ}\text{C}$

0,625 x value stated in Table 2

If owing to prolonged storage and/or storage at an excessive temperature the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Tan δ (dissipation factor)

Tan δ at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$,
measured by means of a four-terminal
circuit (Thomson circuit)

see Table 2

Equivalent series inductance (ESL)

Case sizes 1 and 2

max. 20 nH

Case sizes 3, 4 and 5

max. 35 nH

Case sizes 6, 7 and 8

max. 50 nH

Equivalent series resistance (ESR)

Maximum ESR at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

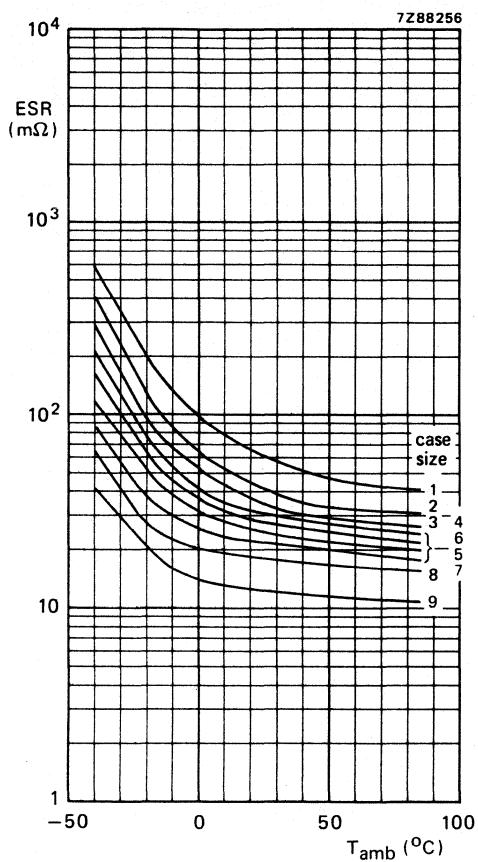


Fig. 8 Typical ESR as a function of temperature at 100 Hz, $U_R = 10$ V.

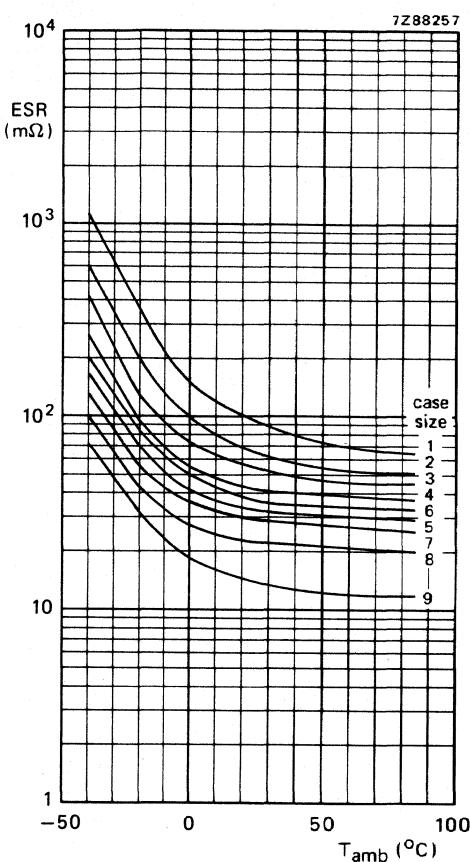


Fig. 9 Typical ESR as a function of temperature at 100 Hz, $U_R = 63$ V.

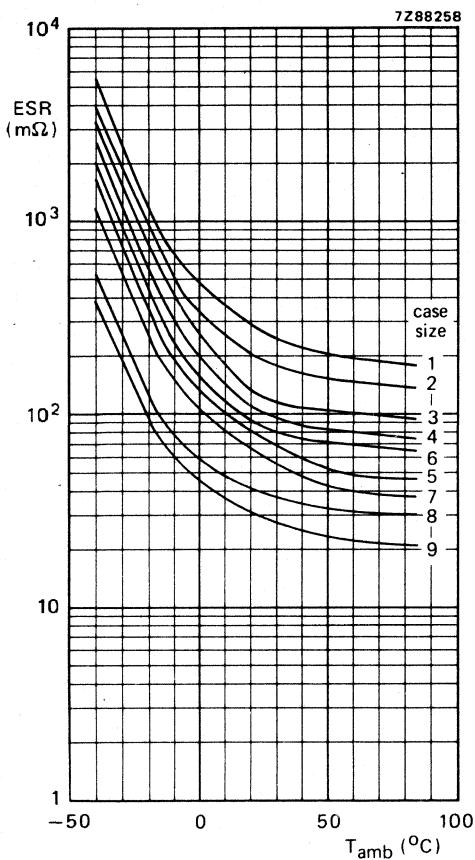


Fig. 10 Typical ESR as a function of temperature at 100 Hz, U_R = 100 V.

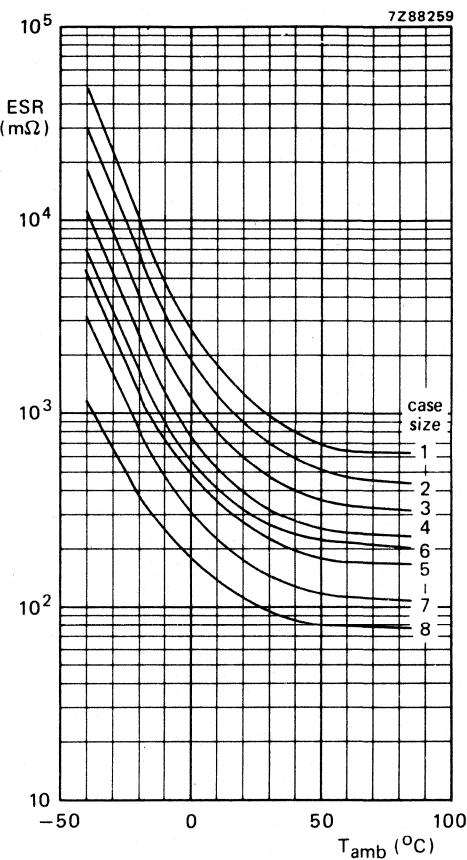


Fig. 11 Typical ESR as a function of temperature at 100 Hz, U_R = 250 V.

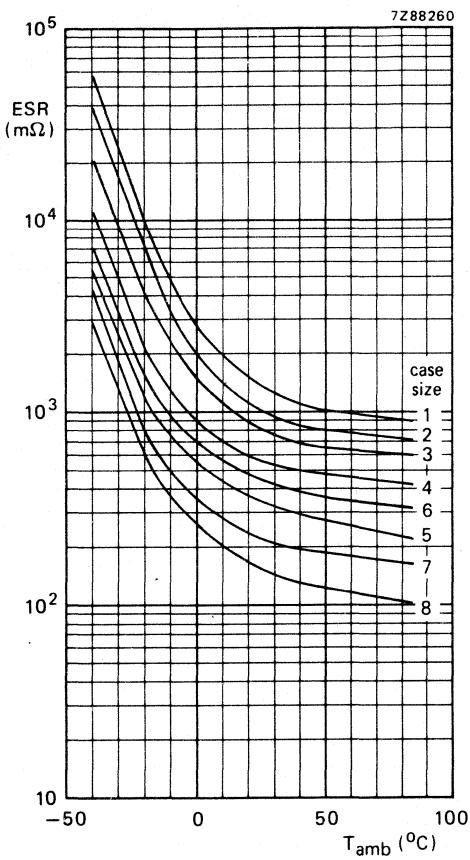


Fig. 12 Typical ESR as a function of temperature at 100 Hz, $U_R = 385$ V.

Impedance

Maximum impedance at 10 kHz and $T_{amb} = 20^\circ\text{C}$, measured
by means of a four-terminal circuit (Thomson circuit)

see Table 2

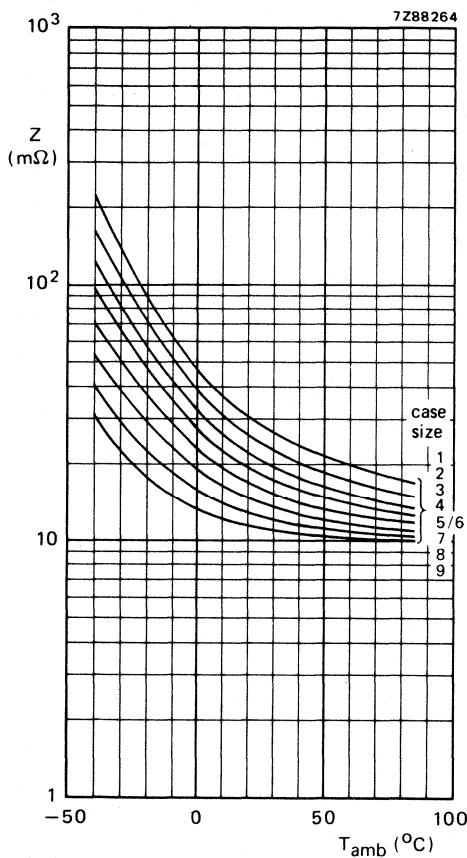


Fig. 13 Typical impedance as a function of
temperature at 10 kHz, $U_R = 10 \text{ V}$.

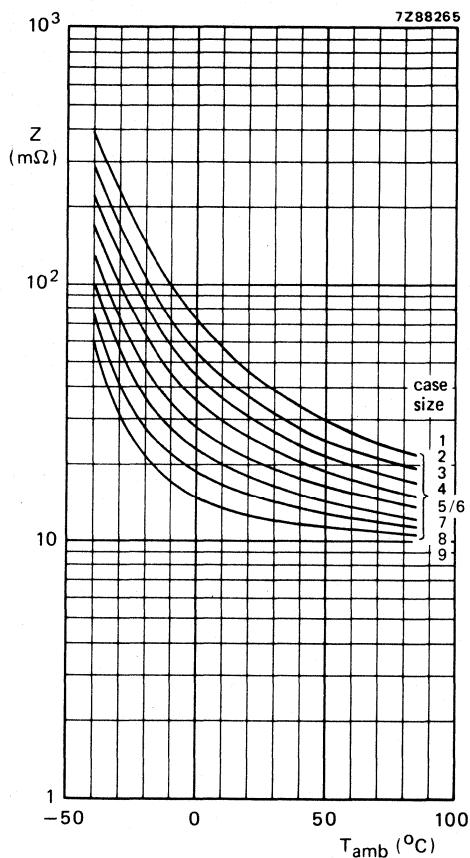


Fig. 14 Typical impedance as a function of
temperature at 10 kHz, $U_R = 63 \text{ V}$.

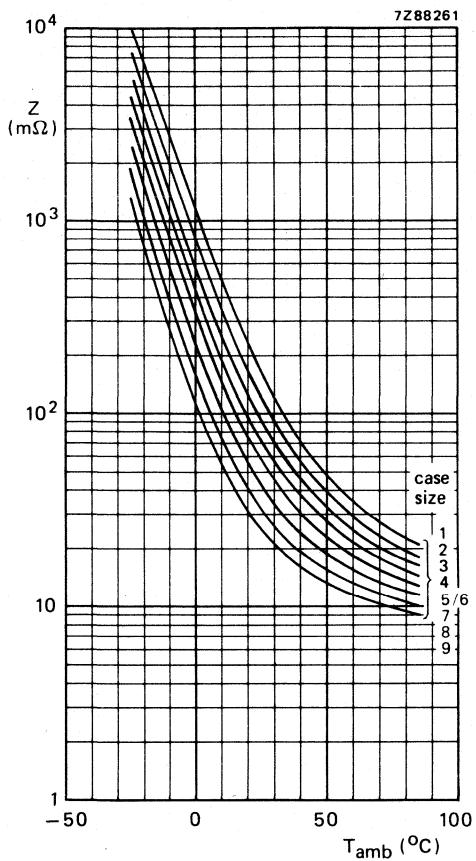


Fig. 15 Typical impedance as a function of temperature at 10 kHz , $U_R = 100 \text{ V}$.

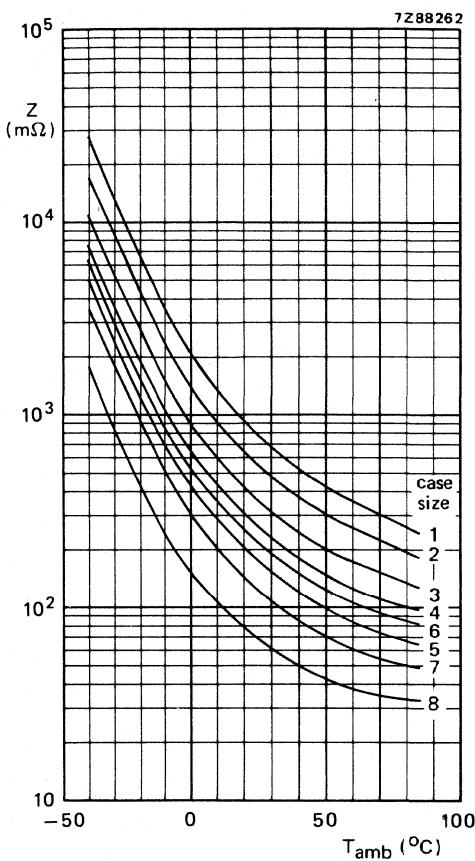


Fig. 16 Typical impedance as a function of temperature at 10 kHz , $U_R = 250 \text{ V}$.

2222 050
2222 052

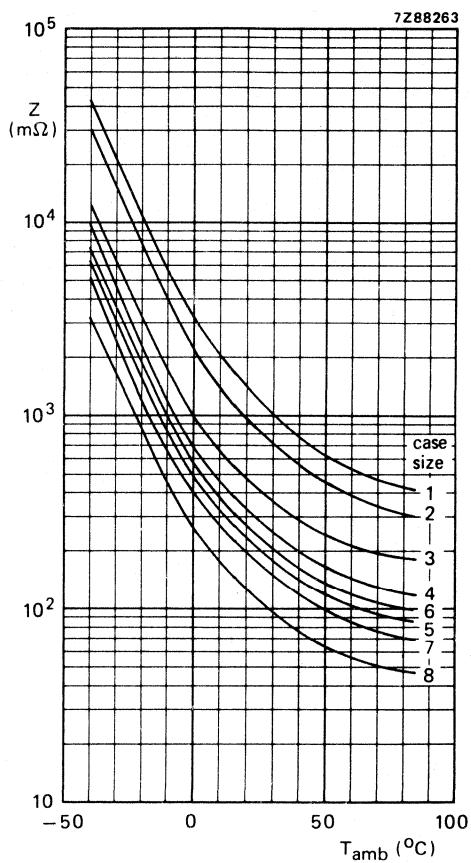


Fig. 17 Typical impedance as a function of temperature at 10 kHz, $U_R = 385 \text{ V}$.

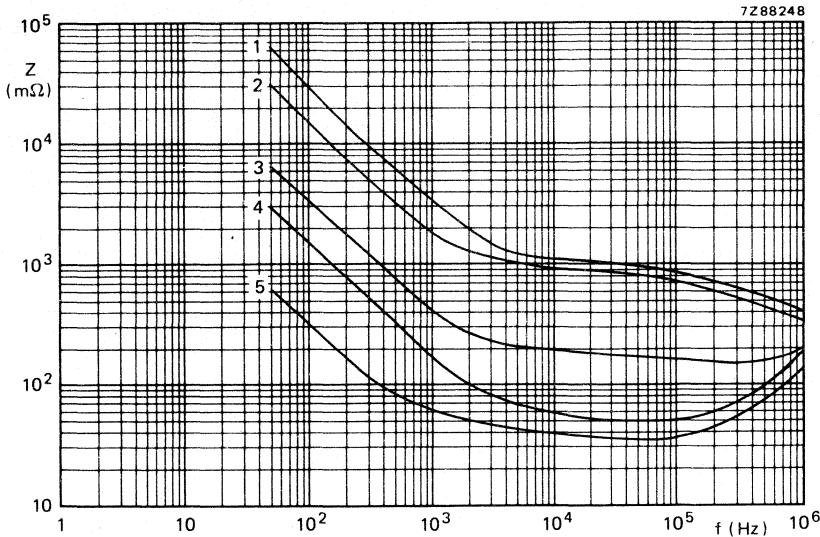


Fig. 18 Typical impedance as a function of frequency at $T_{\text{amb}} = 20^{\circ}\text{C}$; **case size 1:**
 curve 1 = 47 μF , 385 V;
 curve 2 = 100 μF , 250 V;
 curve 3 = 470 μF , 100 V;
 curve 4 = 1000 μF , 63 V;
 curve 5 = 4700 μF , 10 V.

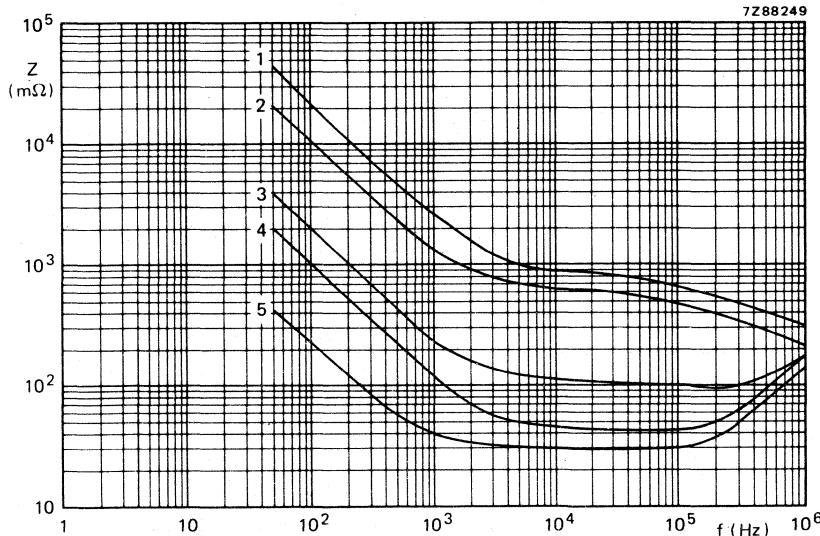


Fig. 19 Typical impedance as a function of frequency at $T_{\text{amb}} = 20^{\circ}\text{C}$; **case size 2:**
 curve 1 = 68 μF , 385 V;
 curve 2 = 150 μF , 250 V;
 curve 3 = 680 μF , 100 V;
 curve 4 = 1500 μF , 63 V;
 curve 5 = 6800 μF , 10 V.

2222 050
2222 052

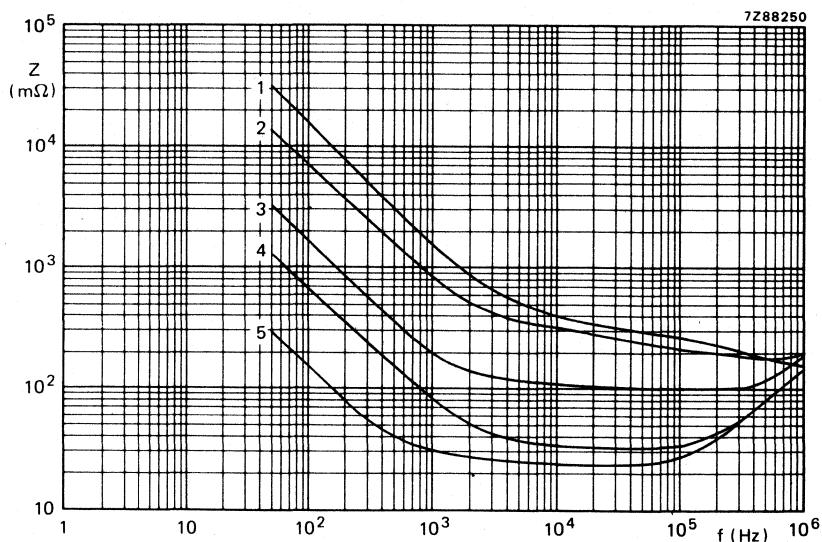


Fig. 20 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 3:
curve 1 = $100 \mu\text{F}$, 385 V;
curve 2 = $220 \mu\text{F}$, 250 V;
curve 3 = $1000 \mu\text{F}$, 100 V;
curve 4 = $2200 \mu\text{F}$, 63 V;
curve 5 = $10000 \mu\text{F}$, 10 V.

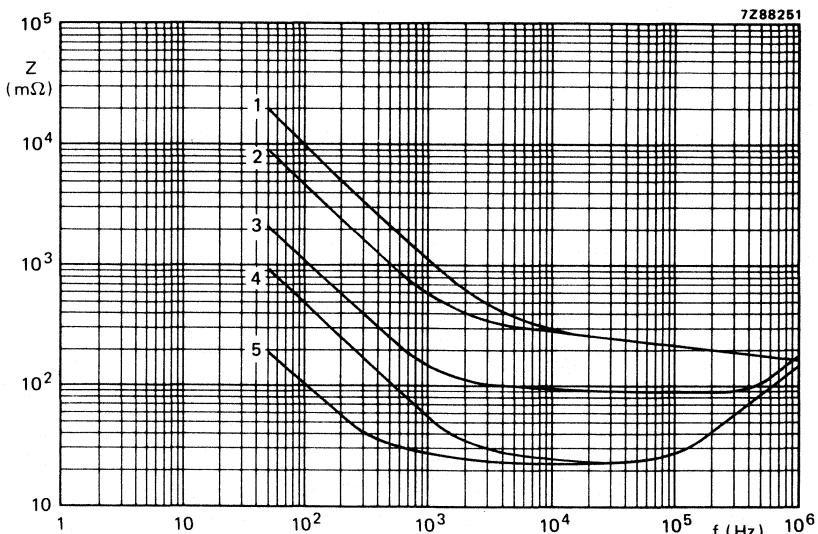


Fig. 21 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 4:
curve 1 = $150 \mu\text{F}$, 385 V;
curve 2 = $330 \mu\text{F}$, 250 V;
curve 3 = $1500 \mu\text{F}$, 100 V;
curve 4 = $3300 \mu\text{F}$, 63 V;
curve 5 = $15000 \mu\text{F}$, 10 V.

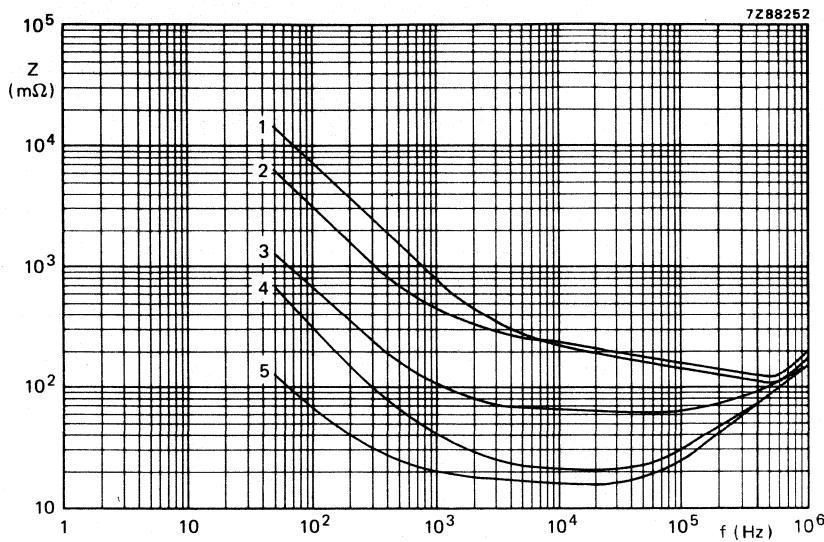


Fig. 22 Typical impedance as a function of frequency at $T_{amb} = 20^\circ\text{C}$; case size 5:
 curve 1 = $220 \mu\text{F}$, 385 V; curve 4 = $4700 \mu\text{F}$, 63 V;
 curve 2 = $470 \mu\text{F}$, 250 V; curve 5 = $22000 \mu\text{F}$, 10 V.
 curve 3 = $2200 \mu\text{F}$, 100 V;

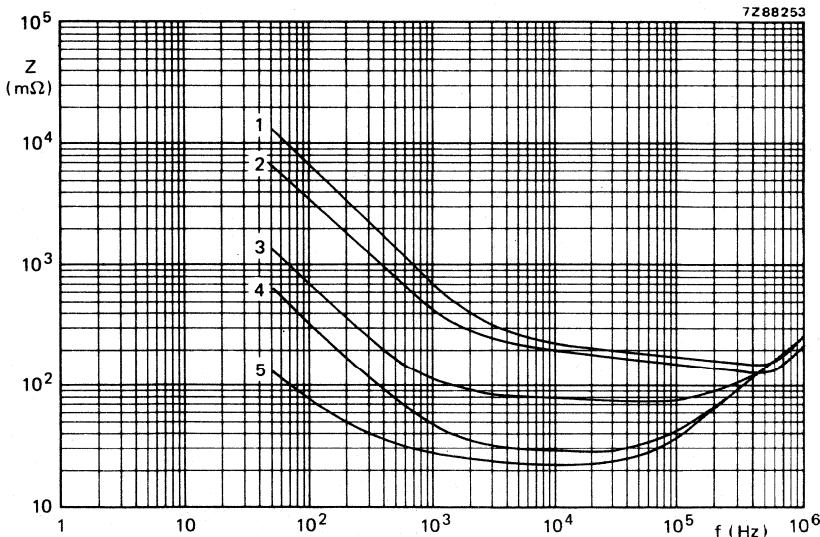


Fig. 23 Typical impedance as a function of frequency at $T_{amb} = 20^\circ\text{C}$; case size 6:
 curve 1 = $220 \mu\text{F}$, 385 V; curve 4 = $4700 \mu\text{F}$, 63 V;
 curve 2 = $470 \mu\text{F}$, 250 V; curve 5 = $22000 \mu\text{F}$, 10 V.
 curve 3 = $2200 \mu\text{F}$, 100 V;

2222 050
2222 052

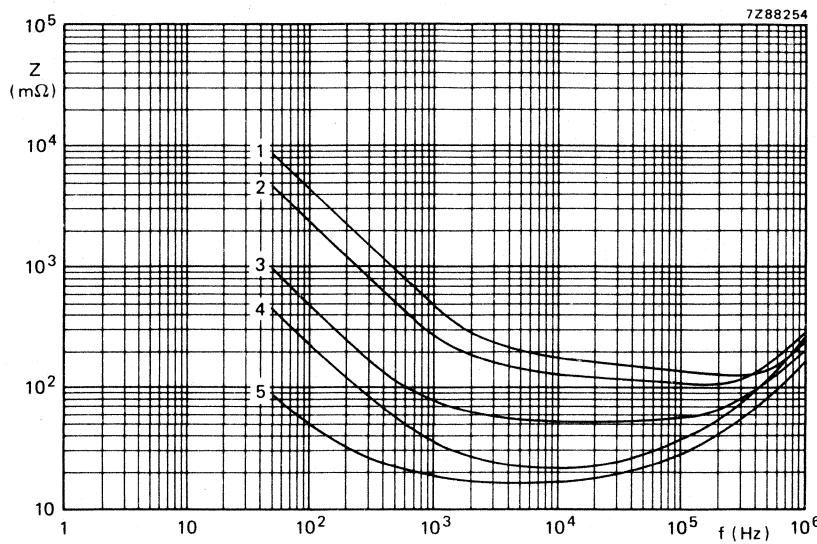


Fig. 24 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 7:
curve 1 = $330 \mu F$, 385 V;
curve 2 = $680 \mu F$, 250 V;
curve 3 = $3300 \mu F$, 100 V;
curve 4 = $6800 \mu F$, 63 V;
curve 5 = $33000 \mu F$, 10 V.

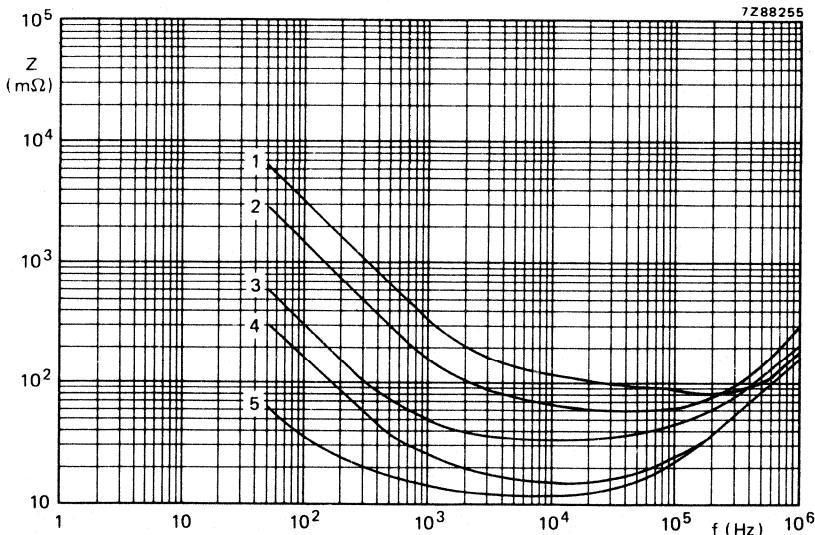


Fig. 25 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 8:
curve 1 = $470 \mu F$, 385 V;
curve 2 = $1000 \mu F$, 250 V;
curve 3 = $4700 \mu F$, 100 V;
curve 4 = $10000 \mu F$, 63 V;
curve 5 = $47000 \mu F$, 10 V.

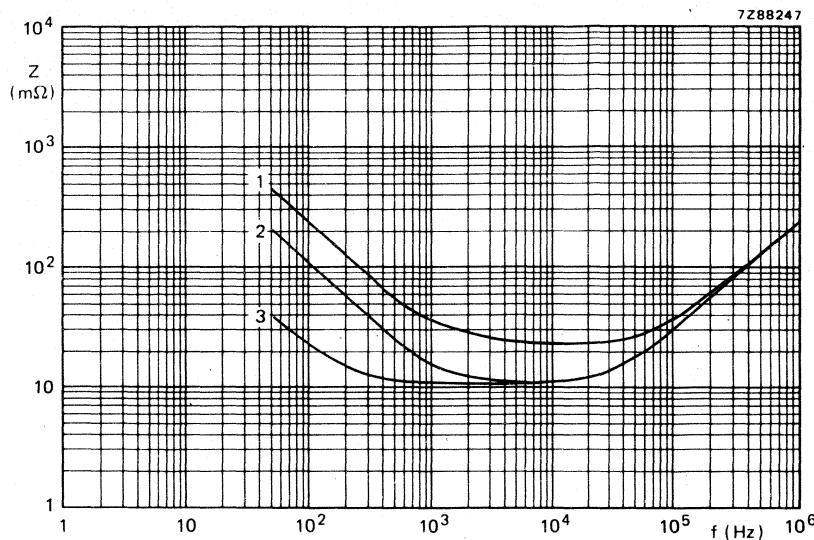


Fig. 26 Typical impedance as a function of frequency at $T_{\text{amb}} = 20 \text{ }^{\circ}\text{C}$; case size 9:
curve 1 = $6800 \mu\text{F}, 100 \text{ V}$;
curve 2 = $15\ 000 \mu\text{F}, 63 \text{ V}$;
curve 3 = $68\ 000 \mu\text{F}, 10 \text{ V}$;

2222 050
2222 052

OPERATIONAL DATA

Category temperature range

-40 to +85 °C

Life expectancy

Typical life time

at $T_{amb} = 85 \text{ }^{\circ}\text{C}$

> 5000 h

at $T_{amb} = 40 \text{ }^{\circ}\text{C}$

> 200 000 h

Guaranteed life time at maximum ripple current and different temperatures

see Table 5

Table 5

ambient temperature °C	guaranteed life time (h) at maximum ripple current
85	2 000
80	3 100
75	4 800
70	7 500
65	12 000
60	18 000
55	27 000
50	42 000
45	65 000
≤ 40	100 000

Failure rate

Failure rate, catastrophic, at rated voltage,
 $T_{amb} = 40 \text{ }^{\circ}\text{C}$ and confidence level 60%

$< 0,5 \times 10^{-7}$

PACKING

The capacitors are packed in boxes containing 100 pieces.

TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

For the 385 V version the leakage current and $\tan \delta$ measurements of the reverse voltage test (sub clause 9 . 16 IEC 384-4) should be carried out after 250 h, U_R in forward polarity.

Note: Capacitors 2222 050 and 2222 052 are large types, long-life grade.

MOUNTING ACCESSORIES

Dimensions in mm

Clamps

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slid over the capacitor and then fixed to it with a nut and bolt. The clamps have two mounting lugs. Four types are available, one for each case diameter of the capacitor range. They are delivered without nuts or bolts.

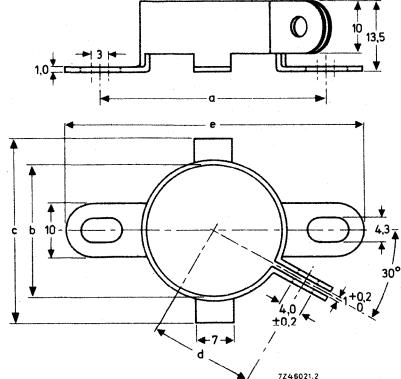


Fig. 27 Clamp for case sizes 1, 2, 3, 7, 8 and 9.

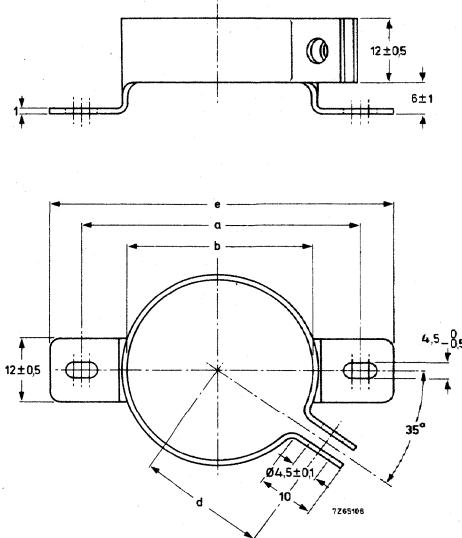


Fig. 28 Clamp for case sizes 4 and 5.

case size	dimensions (mm)					catalogue number
	a	b	c	d	e	
1, 2	$41,5 \pm 0,2$	25	35	18,5	56	4322 043 03301
3	$46,5 \pm 0,2$	30	40	21	61	03311
4, 5	$51,5 \pm 0,2$	35	—	23,5	63	04272
7, 8, 9	$56,5 \pm 0,2$	40	50	26	71	03331

2222 050
2222 052

Bolt/nut

When mounting by means of the bolt, which is an integral part of the case, normal metal M8 nuts and washers can be used. If an insulated mounting is required a synthetic nut and rubber washers are available.

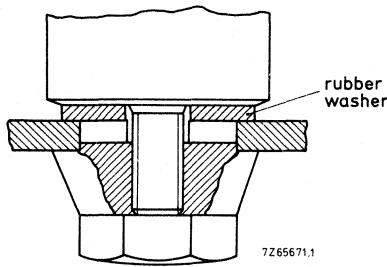


Fig. 29.




Fig. 30 Synthetic cap nut M8,
threaded depth min 11,5 mm.
Catalogue number 4322 043 05561.




Fig. 31 Rubber washer (thickness 2 mm).

D mm	catalogue number
24	4322 043 05611
29	4322 043 05601
34	4322 043 05591
39	4322 043 05581

ALUMINIUM ELECTROLYTIC CAPACITORS



- Small type
- Long life
- Industrial applications

QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	2,2 to 2200 μ F
Tolerance on nominal capacitance	-10 to + 50%
Rated voltage range (U_R) (R5 series)	6,3 to 63 V
Category temperature range	-40 to + 85 °C
Typical life time at 85 °C	case sizes 5,6 case sizes 00 to 03 > 6000 h > 10 000 h
Basic specification	IEC 384-4, long-life grade DIN 41240 (IA) NF C93-110 (type 1)
Climatic category	40/085/56 GPF (56 days) 554
IEC 68 DIN 40040 NF C93-001	
Approval	CECC 30 301-027

Selection chart for $C-U_R$ and relevant case sizes.

C_{nom} μ F	U_R (V)					
	6,3	10	16	25	40	63
2,2						5
3,3						5
4,7						5
6,8						5
10						5
15					5	6
22					5	6
33				5	6	00
47				5	6	00
68		5			00	01
100		5		6	01	02
150	5		6	00	01	03
220		6	00	01	02	
330	6	00			03	
470	00		01	02		
680		01	02	03		
1000	01	02	03			
1500	02	03				
2200	03					

case size	nominal dimensions (mm)
5	Ø 8 x 18
6	Ø 10 x 18
00	Ø 10 x 30
01	Ø 12,5 x 30
02	Ø 15 x 30
03	Ø 18 x 30

APPLICATION

These axial-type capacitors are especially designed for those applications where extreme requirements have to be met concerning reliability and long lifetime both at high and low temperatures, such as in computer telecommunication and telephone apparatus.

DESCRIPTION

The capacitor has etched aluminium foil electrodes rolled up with a porous paper spacer, which separates the anode and the cathode. The spacer is impregnated with an electrolyte which retains its good characteristics both at low and high temperatures. The capacitor is housed in an aluminium case with axial leads, sealed with a synthetic disc and is insulated with a blue synthetic sleeve. The all-welded construction, the built-in voltage derating, and the close quality control during manufacture ensure a reliability and a life expectancy far superior to normal grade electrolytic capacitors.

MECHANICAL DATA

Dimensions in mm

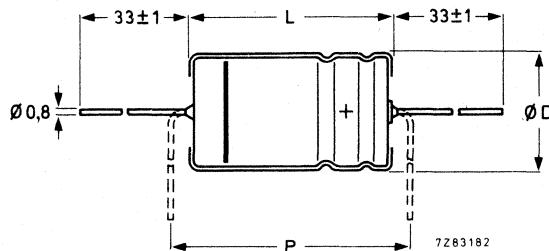


Fig. 1 Case sizes 5 and 6. For dimensions D, L and P, see Table 1.

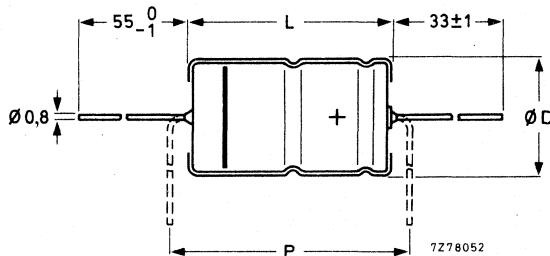


Fig. 2 Case sizes 00, 01, 02 and 03. For dimensions D, L and P, see Table 1.

Table 1

case size	dimensions			approx. mass g
	D	L	P _{min}	
5	8,0	18,0	25	1,8
6	10,0	18,0	25	2,5
00	10,0	30,0	35	4,3
01	12,5	30,0	35	6,6
02	15,0	30,0	35	8,5
03	18,0	30,0	35	11,2

Marking

The capacitors are marked with: nominal capacitance, rated voltage, tolerance on capacitance, group number 108.3, maximum temperature, date code, a band to identify the negative terminal and "+" signs for positive terminal.

Mounting

The capacitors may be mounted in any position by their leads (see also Tests and requirements in the Introduction).

Minimum atmospheric pressure

8,5 kPa



ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

UR V	nom. cap. μF	max. r.m.s. ripple cur- rent at Tamb = 85 °C (mA) *	max. leakage current at UR after 5 min μA	max. tan δ *	typ. ESR *	impedance at 100 kHz		case size	catalogue number
						Ω	Ω		
6,3	150	130	10	0,20	1,06	1,60	0,70	5	2222 108 33151
	330	220	17	0,20	0,49	0,84	0,36	6	33331
	470	325	22	0,20	0,34	0,42	0,18	00	33471
	1000	470	42	0,20	0,16	0,30	0,13	01	33102
	1500	630	60	0,20	0,11	0,22	0,10	02	33152
	2200	920	85	0,20	0,09	0,19	0,09	03	33222
10	100	120	10	0,15	1,27	1,60	0,70	5	34101
	220	205	17	0,15	0,57	0,84	0,36	6	34221
	330	325	24	0,15	0,38	0,42	0,18	00	34331
	680	470	45	0,15	0,19	0,30	0,13	01	34681
	1000	630	65	0,15	0,13	0,22	0,10	02	34102
	1500	920	95	0,15	0,09	0,19	0,09	03	34152
16	68	110	11	0,12	1,40	1,60	0,70	5	35689
	150	190	18	0,12	0,63	0,84	0,36	6	35151
	220	270	25	0,12	0,44	0,42	0,18	00	35221
	470	360	50	0,12	0,21	0,30	0,13	01	35471
	680	500	70	0,12	0,14	0,22	0,10	02	35681
	1000	650	100	0,12	0,10	0,19	0,09	03	35102
25	33	85	8	0,10	2,41	1,60	0,70	5	36339
	47	100	11	0,10	1,70	1,60	0,70	5	36479
	100	170	19	0,10	0,80	0,84	0,36	6	36101
	150	270	26	0,10	0,53	0,42	0,18	00	36151
	220	360	37	0,10	0,36	0,30	0,13	01	36221
	470	500	75	0,10	0,17	0,22	0,10	02	36471
40	680	650	105	0,10	0,12	0,19	0,09	03	36681
	15	65	6	0,08	4,24	1,60	0,70	5	37159
	22	80	9	0,08	2,89	1,60	0,70	5	37229
	33	110	12	0,08	1,93	0,84	0,36	6	37339
	47	130	15	0,08	1,36	0,84	0,36	6	37479
	68	195	20	0,08	0,93	0,42	0,18	00	37689
63	100	245	28	0,08	0,63	0,30	0,13	01	37101
	150	280	40	0,08	0,43	0,30	0,13	01	37151
	220	360	55	0,08	0,34	0,22	0,10	02	37221
	330	495	85	0,08	0,20	0,19	0,09	03	37331
	2,2	25	1,5	0,08	28,9	1,60	0,70	5	38228
	3,3	30	2	0,08	19,3	1,60	0,70	5	38338
	4,7	35	3	0,08	13,5	1,60	0,70	5	38478
	6,8	45	4	0,08	9,36	1,60	0,70	5	38688
	10	50	6	0,08	6,37	1,60	0,70	5	38109
	15	75	10	0,08	2,90	0,84	0,36	6	38159
	22	90	12	0,08	4,25	0,84	0,36	6	38229
	33	125	17	0,08	1,93	0,42	0,18	00	38339
	47	150	22	0,08	1,36	0,42	0,18	00	38479
	68	195	30	0,08	0,93	0,30	0,13	01	38689
	100	275	42	0,08	0,63	0,22	0,10	02	38101
	150	355	60	0,08	0,43	0,19	0,09	03	38151



* See also corresponding paragraph.

CapacitanceNominal capacitance value at 100 Hz at $T_{amb} = 20^\circ\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to + 50%

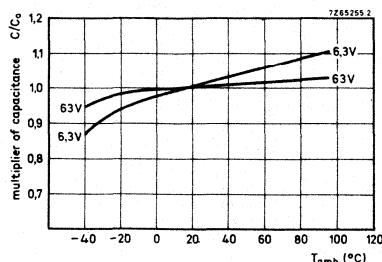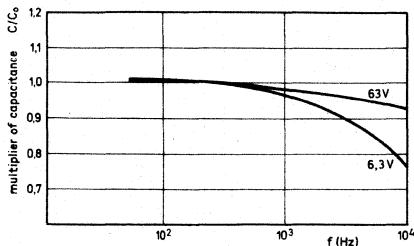Fig. 3 Typical capacitance as a function of temperature; C_0 = capacitance at 20°C , 100 Hz.Fig. 4 Typical capacitance as a function of frequency; C_0 = capacitance at 20°C , 100 Hz.**Voltage**

Max. permissible voltage

$$1,1 \times U_R$$

Ripple voltage * = max. permissible a.c. voltage providing the following three conditions are met:

$$\leq 1,1 \times U_R$$

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage, with d.c. voltage applied
- c) max. peak a.c. voltage, without d.c. voltage applied

$$\leq \text{applied d.c. voltage} + 1 \text{ V}$$

Surge voltage = max. permissible voltage for short periods (see also Tests and requirements in the Introduction)

$$1 \text{ V}$$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at 85°C

$$1,15 \times U_R$$

$$1 \text{ V}$$

Ripple current

Maximum permissible r.m.s. ripple current at 100 Hz and

see Table 2

$$T_{amb} = 85^\circ\text{C}$$

$$T_{amb} = 75^\circ\text{C}$$

$$T_{amb} \leq 65^\circ\text{C}$$

$$1,7 \times \text{values of Table 2}$$

$$2,2 \times \text{values of Table 2}$$

* Ripple voltages are not applicable if the max. permissible ripple current is exceeded. In that case the ripple current is decisive.

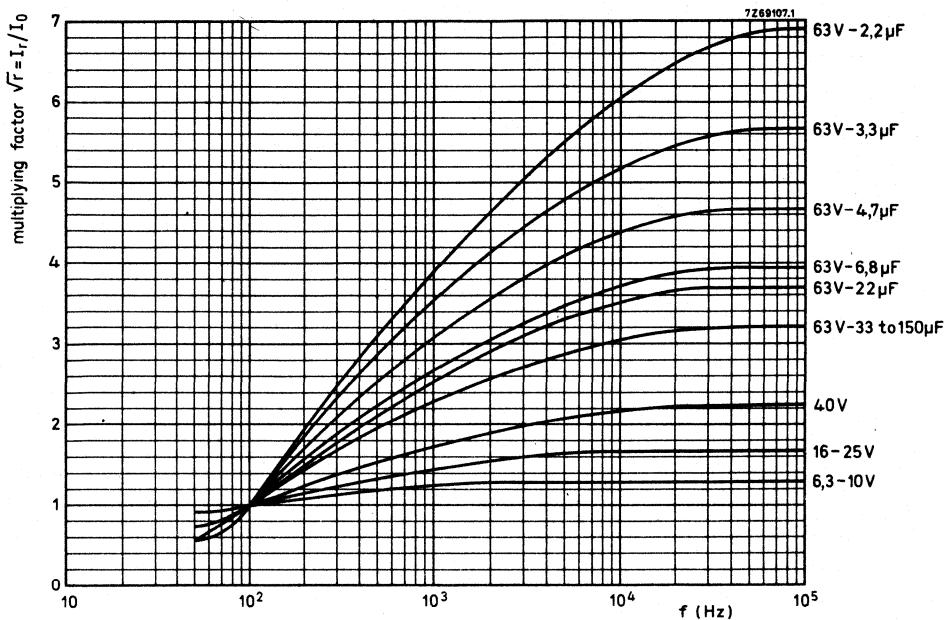


Fig. 5 Multiplying factor as a function of frequency. I_0 = maximum ripple current at 85 °C, 100 Hz.

Non-sinusoidal currents

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r^2 \text{ max.}$$

$I_r \text{ max}$ = max. ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$\sqrt{r_n}$ = multiplying factor at same frequency.

Note

These ripple currents are not applicable if the max. permissible ripple voltage is exceeded. In that case the ripple voltage is decisive (see Ripple voltage).

Charge and discharge current

The capacitors may be charged from a source with a source impedance of 0Ω , and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current 5 min after application
of the rated voltage at $T_{amb} = 20^\circ C$

see Table 2

Leakage current during continuous operation at U_R
at $20^\circ C$
at $85^\circ C$

approx. 0,2 of value stated in Table 2
 \leq value stated in Table 2

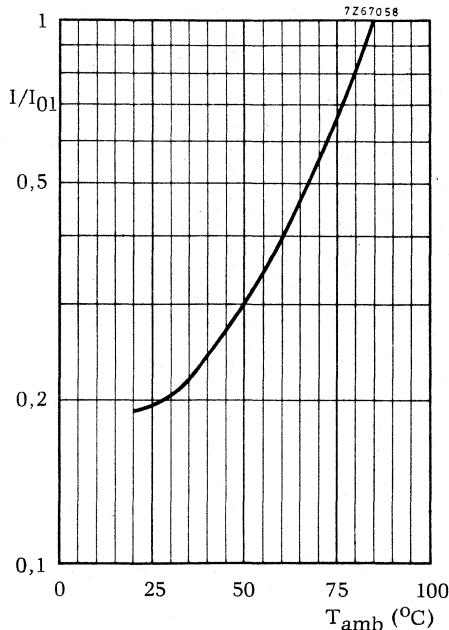


Fig. 6 Multiplier I/I_{01} as a function of temperature.
 I_{01} = leakage current during continuous operation
at $T_{amb} = 85^\circ C$ at U_R .

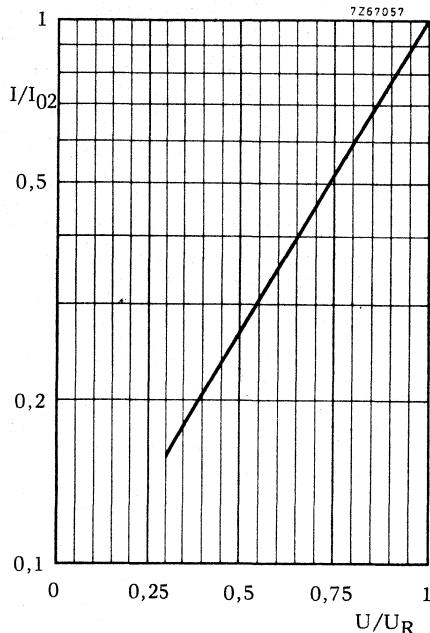


Fig. 7 Multiplier I/I_{02} as a function of U/U_R .
 I_{02} = leakage current at U_R at a discrete constant temperature within category temperature range.

If owing to prolonged storage and/or storage at an excessive temperature ($> 40^\circ C$) the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Tan δ (dissipation factor)

Tan δ at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Impedance

Impedance at 100 kHz and $T_{amb} = 20^{\circ}\text{C}$, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

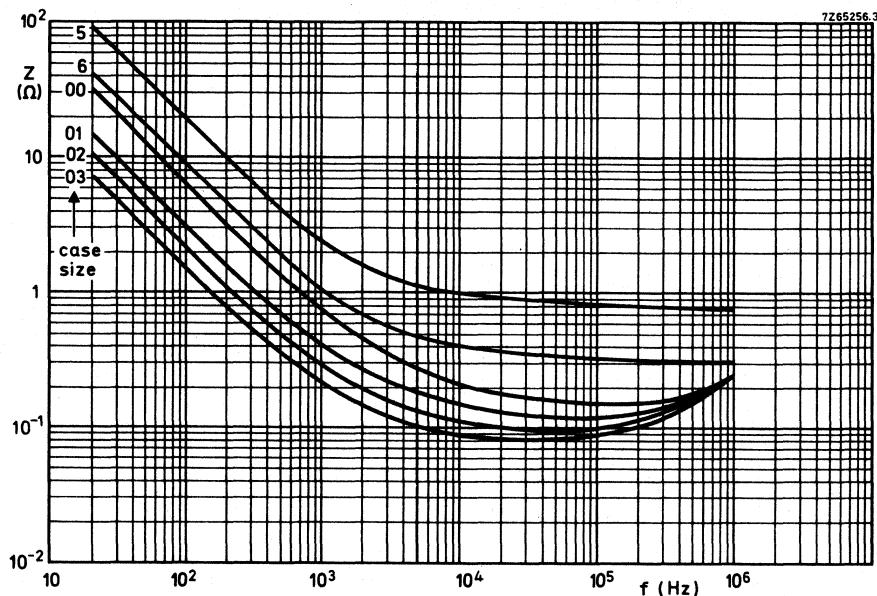


Fig. 8 Typical impedance as a function of frequency at 20°C , for 16 V versions.

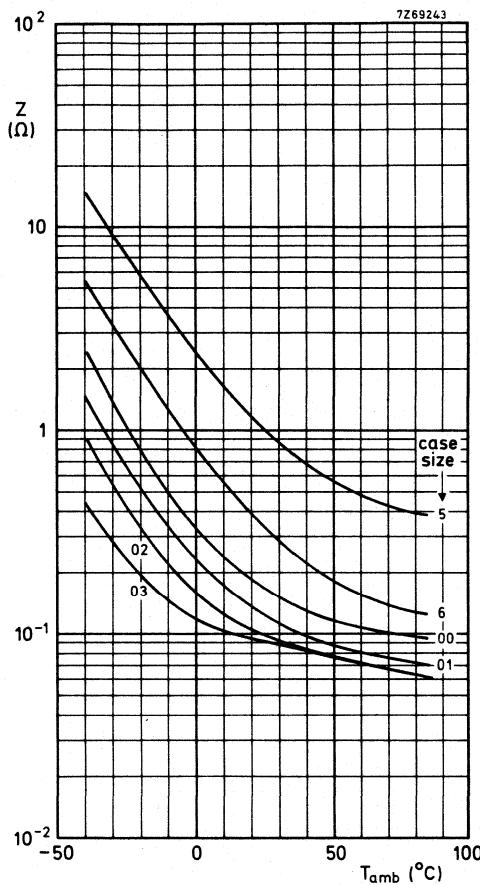


Fig. 9 Typical impedance as a function of temperature at 100 kHz.

Equivalent series resistance (ESR = $\tan \delta / \omega C$)

ESR at 100 Hz and $T_{\text{amb}} = 20 ^{\circ}\text{C}$

see Table 2

Inductance

$\leq 40 \text{ nH}$

OPERATIONAL DATA**Category temperature range**

for rated voltage

-40 to +85 °C

Life expectancy**Guaranteed lifetime**

at + 85 °C	5000 h
at + 105 °C	1000 h

Typical lifetime

	case sizes 5 and 6	case sizes 00 to 03
at + 40 °C	> 120 000 h	> 160 000 h
at + 85 °C	> 6 000 h	> 10 000 h
at + 105 °C	> 1 200 h	> 2 000 h

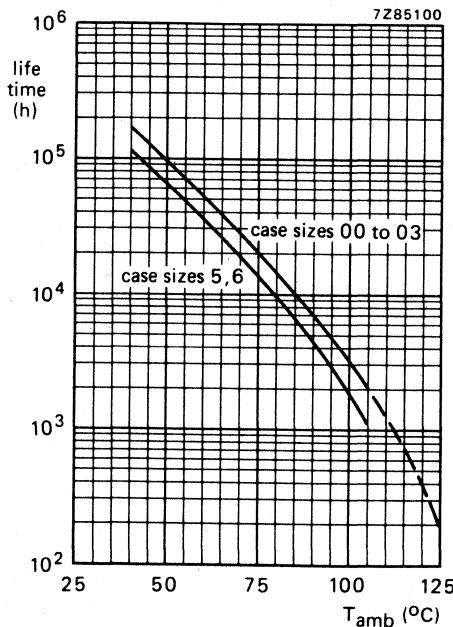


Fig. 10 Typical lifetime as a function of temperature.

PACKING

Case sizes 5 and 6: on bandoliers in boxes of 500.

Case sizes 00 to 03: in boxes of 200.

TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the exception of IEC 384-4 sub clause 9. 14, for which the following is valid.

IEC 384-4 sub clause 9. 14.

IEC 68-2 test method: no reference.

Name of test: Endurance.

Procedure: 5000 h at 85 °C, rated voltage and ripple current applied.


Requirements: No visible damage, no leakage of electrolyte, insulation resistance > 100 MΩ, no breakdown or flashover, leakage current ≤ stated limit, $\tan \delta \leq 1,3 \times$ stated limit, impedance at 100 kHz ≤ 2 x stated limit, $\Delta C/C \leq 15\%$.

Note

Capacitors 2222 108 belong to the small types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with screw terminals
- Long life
- Industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	150 to 220 000 μ F
Tolerance on nominal capacitance	-10 to + 30%
Rated voltage range, U_R	10 to 385 V
Category temperature range	-40 to + 85 °C
Endurance test at 85 °C	5000 h
Basic specification	IEC 384-4, long-life grade DIN 41240 DIN 41248
Detail specification	40/085/56
Climatic category	GPF (56 days) 554
IEC 68	10
DIN 40040	11
NF C93-001	12a

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μ F	U_R (V)								
	10	16	25	40	63	100	250	350	385
150									10
220									11
330							10		12a
470							11		14
680							12a	14	15a
1 000						10	14	15a	16a
1 500						10	15a		16a
2 200					10	11	16a		17
3 300				10	10	12a	16a		
4 700			10	10	11	14	17		
6 800			10	11	12a	15a			
10 000		10	11	12a	14	16a			
15 000	10	11	12a	14	15a	16a			
22 000	11	12a	14	15a	16a	17			
33 000	12a	14	15a	16a	16a				
47 000	14	15a	16a	16a	17				
68 000	15a	16a	16a	17					
100 000	16a	16a	17						
150 000	16a	17							
220 000	17								

case size	nominal dimensions (mm)
10	\emptyset 35 x 60
11	\emptyset 35 x 80
12a	\emptyset 35 x 105
14	\emptyset 50 x 80
15a	\emptyset 50 x 105
16a	\emptyset 65 x 105
17	\emptyset 75 x 105

APPLICATION

These capacitors have extremely low impedance and inductance values and high resistance to shock and vibration which render them very suitable for applications such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.

DESCRIPTION

The low impedance and inductance are achieved by a special construction with multiple internal anode and cathode connections. The high resistance to shock and vibration is achieved by the longitudinal rills and special internal construction. The capacitors are completely cold-welded and there are no limitations on charge/discharge rate (see paragraph "Charge and discharge current"). The aluminium cases are fully insulated and sealed by a synthetic disc with a vent. The capacitors are delivered with screws and washers.

MECHANICAL DATA

Dimensions in mm

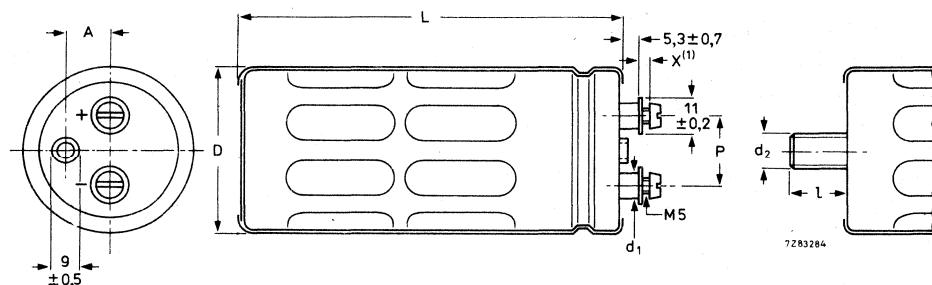


Fig. 1 See Table 1 for dimensions D, L, P, A, d_1 , d_2 , and I.

(1) Maximum permissible torque which may be applied to the termination screws at various heights (dimension x in drawing):

x	max. permissible torque (Nm)
2	1,5
4	1
6	0,5

Table 1

case size	D	L	P	A	d ₁	d ₂ x l			
10	35	60	13,0	8,4	8	M8 x 12			
11	35	80	13,0	8,4	8	M8 x 12			
12a	35	105	13,0	8,4	8	M8 x 12			
14	50	+ 1,5	80 + 3	22,0	± 0,1	14,3	8	± 0,2	M12 x 16
15a	50	105	22,0	14,3	8	M12 x 16			
16a	65	105	28,5	19,0	11	M12 x 16			
17	75	105	32,0	21,0	11	M12 x 16			

Marking

The capacitors are marked with: nominal capacitance, tolerance on nominal capacitance, rated voltage, temperature range, IEC grade, maximum r.m.s. ripple current at 70 °C and 20 kHz, catalogue number, date code (year/month), name of manufacturer.

Mounting

The capacitors may be mounted vertically or horizontally, with or without mounting clamp. The vent should be on the upper side when the capacitor is mounted horizontally. When a number of capacitors are connected in a bank, they must not be closer together than 15 mm when no derating of ripple current and/or temperature is applied. See also Mounting Accessories, at the end of this data sheet.

Minimum atmospheric pressure

8,5 kPa



ELECTRICAL DATA

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 2

U _R V	nom. cap. μF	max. r.m.s.* ripple current (A)		max. leakage current at U _R after 5 min	typ.* ESR mΩ	max. tan δ* %	impedance at 20 kHz*mΩ		case size	catalogue number**	
		at T _{amb} = 85 °C 100 Hz	at T _{amb} = 70 °C 20 kHz				typ.	max.			
10	15 000	6	11,4	0,90	20	0,32	13	20	10	2222 114 14153	
	22 000	7,5	14,2	1,32	14	0,33	9,5	14	11	14223	
	33 000	10	19	1,98	10	0,35	7,5	10	12a	14333	
	47 000	14	26,5	2,82	7,5	0,36	5,0	8,0	14	14473	
	68 000	18	34	4,08	5,5	0,38	4,0	6,5	15a	14683	
	100 000	30	50	6,00	3,5	0,34	3,0	5,0	16a	14104	
	150 000	30	50	9,00	3,0	0,45	3,0	5,0	16a	14154	
	220 000	37	50	13,20	2,0	0,45	2,5	4,0	17	14224	
	16	10 000	6	11,4	0,96	22	0,22	13	20	10	15103
25	15 000	7,5	14,2	1,44	15	0,23	9,5	14	11	15153	
	22 000	10	19	2,12	11	0,25	7,0	10	12a	15223	
	33 000	13	24,6	3,17	7,5	0,26	5,0	8,0	14	15333	
	47 000	18	34	4,52	5,5	0,27	4,0	6,5	15a	15473	
	68 000	28	50	6,53	3,5	0,24	3,0	5,0	16a	15683	
	100 000	28	50	9,60	3,0	0,31	3,0	5,0	16a	15104	
	150 000	37	50	14,40	2,0	0,31	2,5	4,0	17	15154	
	40	4 700	5,2	10	0,71	30	0,14	15	23	10	16472
	6 800	5,2	10	1,02	25	0,18	14	21	10	16682	
40	10 000	6,7	12,7	1,50	18	0,18	10	15	11	16103	
	15 000	9,7	18,4	2,25	12	0,19	7,5	11	12a	16153	
	22 000	12,5	23,7	3,30	8,5	0,19	5,5	8,0	14	16223	
	33 000	18	34	4,95	6,0	0,21	4,0	6,5	15a	16333	
	47 000	27	50	7,05	4,0	0,18	3,0	5,0	16a	16473	
	68 000	27	50	10,20	3,5	0,23	3,0	5,0	16a	16683	
	100 000	37	50	15,00	2,5	0,23	2,5	4,0	17	16104	
	3 300	4,5	8,5	0,80	37	0,13	21	32	10	17332	
	4 700	4,5	8,5	1,13	35	0,17	22	33	10	17472	

* See also corresponding paragraph.
** Replace 8th digit by 5 for bolt version.

U _R V	nom. cap. μF	max. r.m.s.* ripple current (A)		max. leakage current at U _R after 5 min	typ.* ESR mΩ	max. tan δ * %	impedance at 20 kHz* mΩ		case size	catalogue number**	
		at T _{amb} = 85 °C 100 Hz	at T _{amb} = 70 °C 20 kHz				typ.	max.			
63	2 200	3,7	7	0,84	39	0,09	22	33	10	2222 114 18223	
	3 300	3,7	7	1,25	32	0,11	20	30	10	18332	
	4 700	5,2	10	1,78	23	0,11	14	21	11	18472	
	6 800	7,5	14,2	2,57	17	0,11	10	15	12a	18682	
	10 000	9,5	18	3,78	12	0,12	7,5	12	14	18103	
	15 000	13,5	25,6	5,67	8,5	0,13	5,5	8,5	15a	18153	
	22 000	21	40	8,32	5,0	0,11	3,5	6,0	16a	18223	
	33 000	22	42	12,48	4,5	0,14	3,5	6,0	16a	18333	
	47 000	30	50	17,77	3,0	0,14	3,0	4,5	17	18473	
	100	1 000	2,2	4,2	0,60	220	0,22	160	240	10	19102
100	1 500	2,2	4,2	0,90	220	0,33	160	240	10	19152	
	2 200	3,3	6,3	1,32	150	0,33	110	165	11	19222	
	3 300	4,5	8,5	1,98	100	0,33	75	115	12a	19332	
	4 700	5,7	10,8	2,82	70	0,33	55	85	14	19472	
	6 800	8,0	15,2	4,08	50	0,33	35	55	15a	19682	
	10 000	13,5	25,6	6,00	22	0,22	16	25	16a	19103	
	15 000	13,5	25,6	9,00	22	0,33	16	25	16a	19153	
	22 000	15,0	28,5	13,20	15	0,33	11	17	17	19223	
	250	330	1,8	3,4	0,50	300	0,15	275	500	10	2222 115 13331
	470	2,5	4,7	0,71	250	0,15	140	375	11	13471	
350	680	3,5	6,6	1,02	180	0,15	125	300	12a	13681	
	1 000	4,2	8	1,50	110	0,15	60	130	14	13102	
	1 500	6,3	12	2,25	60	0,15	40	100	15a	13152	
	2 200	8,8	16,7	3,30	45	0,15	30	60	16a	13222	
	3 300	10,5	20	4,95	30	0,15	25	50	16a	13332	
	4 700	14	26,5	7,05	25	0,15	20	40	17	13472	
	680	2,7	5,1	1,47	140	0,10	60	130	14	15681	
	1 000	4,8	9,1	2,14	65	0,10	50	100	15a	15102	
	150	1,2	2,3	0,34	425	0,10	250	500	10	18151	
	220	1,6	3	0,50	275	0,10	200	380	11	18221	
385	330	2,2	4,2	0,75	175	0,10	140	300	12a	18331	
	470	2,7	5,1	1,06	110	0,10	75	130	14	18471	
	680	4,8	9,1	1,53	90	0,10	60	130	15a	18681	
	1 000	7	13,3	2,25	70	0,10	45	60	16a	18102	
	1 500	7	13,3	3,38	45	0,10	30	50	16a	18152	
	2 200	9	17	4,95	35	0,10	20	45	17	18222	

* See also corresponding paragraph.

** Replace 8th digit by 5 for bolt version.

Capacitance

Nominal capacitance at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to + 30%

Voltage

Rated voltage = max. permissible voltage

	< 50 °C	50 to 85 °C
Rated voltage	$1,1 \times U_R$	U_R
Ripple voltage	$1,1 \times U_R$	U_R
	$1 V$	
Surge voltage	$1,25 \times U_R$	$1,15 \times U_R$
	$1,15 \times U_R$	
	$1,1 \times U_R$	
	$1 V$	
Reverse voltage		

Ripple voltage = max. permissible a.c. voltage providing the following three conditions are met:

- (a) max. positive voltage on anode
(d.c. + peak a.c.)
- (b) max. positive voltage on cathode
(reverse voltage)
- (c) max. ripple current is not exceeded

Surge voltage = max. permissible voltage for short periods
(see also "Tests and requirements")

$U_R = 10$ to 100 V

$U_R = 250$ V

$U_R = 350$ V and 385 V

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature (for short periods)

Ripple current

Maximum permissible r.m.s. ripple current
 at 100 Hz and $T_{amb} = 85^{\circ}\text{C}$
 at 20 kHz and $T_{amb} = 70^{\circ}\text{C}$
 at other frequencies and temperatures

see Table 2
 see Table 2
 see Tables 3 and 4*

Table 3

ambient temperature $^{\circ}\text{C}$	multiplier of max. ripple current
85	1,00
80	1,22
75	1,41
70	1,58
65	1,73
60	1,87
55	2,00
50	2,12
45	2,24
≤ 40	2,35

Table 4

frequency Hz	multiplier of max. ripple current (\sqrt{r})
50	0,83
100	1,00
200	1,10
400	1,15
1000	1,19
≥ 2000	1,20

*With an absolute maximum of 50 A.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$ = max. ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$\sqrt{r_n}$ = multiplying factor at same frequency (Table 4)

Note

Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current 5 min after application
 of the rated voltage at $T_{amb} = 20^{\circ}\text{C}$

see Table 2 (0,006 CU + 4 μA)

Leakage current after 15 min at U_R ,

at $T_{amb} = 20^{\circ}\text{C}$

0,125 x value stated in Table 2

at $T_{amb} = 85^{\circ}\text{C}$

0,625 x value stated in Table 2

If owing to prolonged storage and/or storage at an excessive temperature the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Tan δ (dissipation factor)

Maximum tan δ at 100 Hz and $T_{amb} = 20^\circ\text{C}$, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Equivalent series resistance (ESR)

Typical ESR at 100 Hz and $T_{amb} = 20^\circ\text{C}$

see Table 2

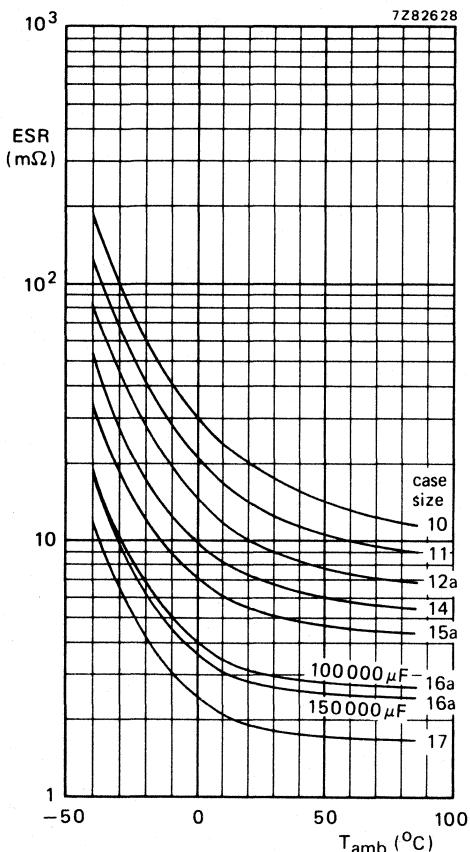


Fig. 2 Typical ESR as a function of temperature at 100 Hz, $U_R = 10 \text{ V}$.

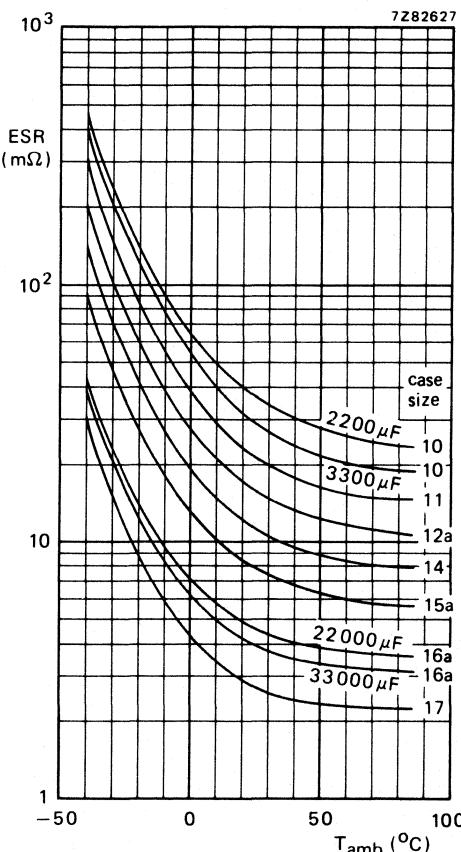


Fig. 3 Typical ESR as a function of temperature at 100 Hz, $U_R = 63 \text{ V}$.

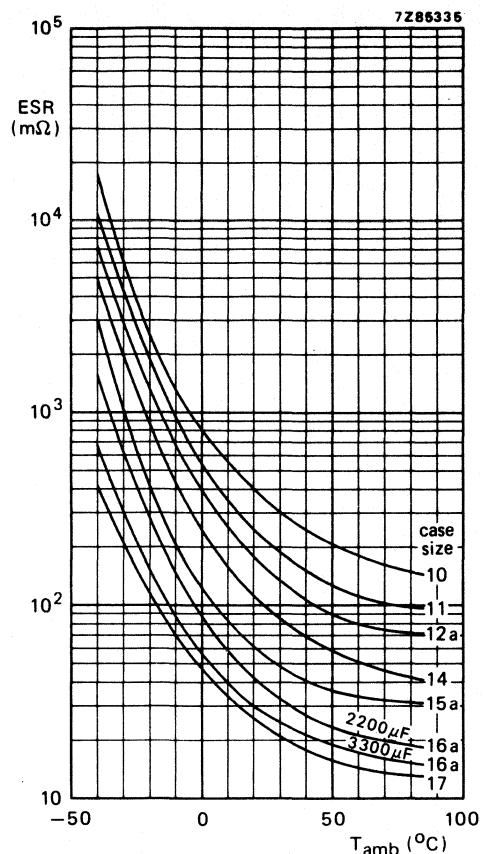


Fig. 4 Typical ESR as a function of temperature at 100 Hz, $U_R = 250$ V.

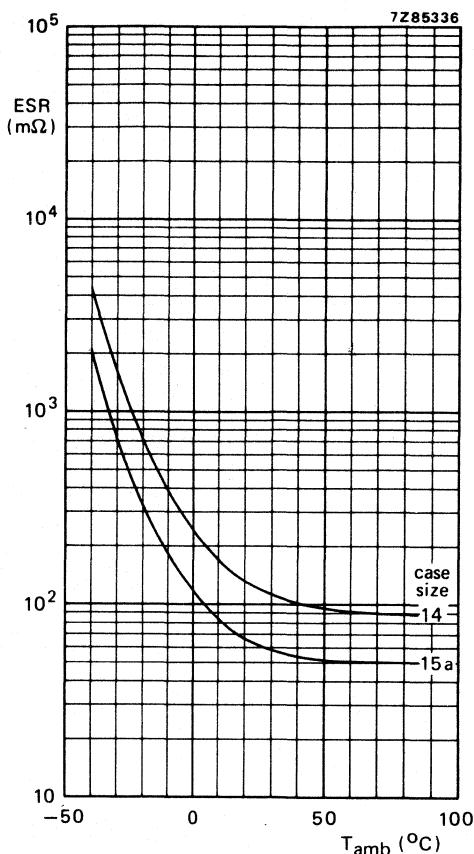


Fig. 5 Typical ESR as a function of temperature at 100 Hz, $U_R = 350$ V.

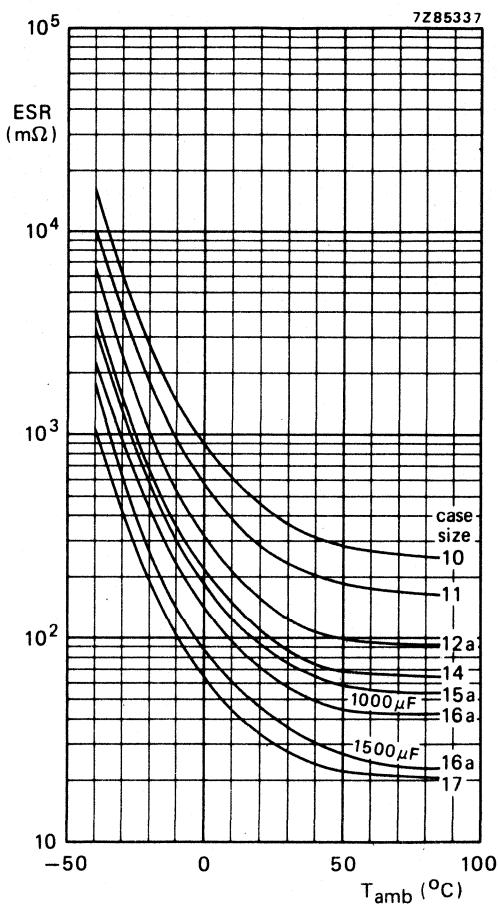


Fig. 6 Typical ESR as a function of temperature at 100 Hz, U_R = 385 V.

Impedance

Impedance at 20 kHz and $T_{amb} = 20^{\circ}\text{C}$, measured
by means of a four-terminal circuit (Thomson circuit)

see Table 2

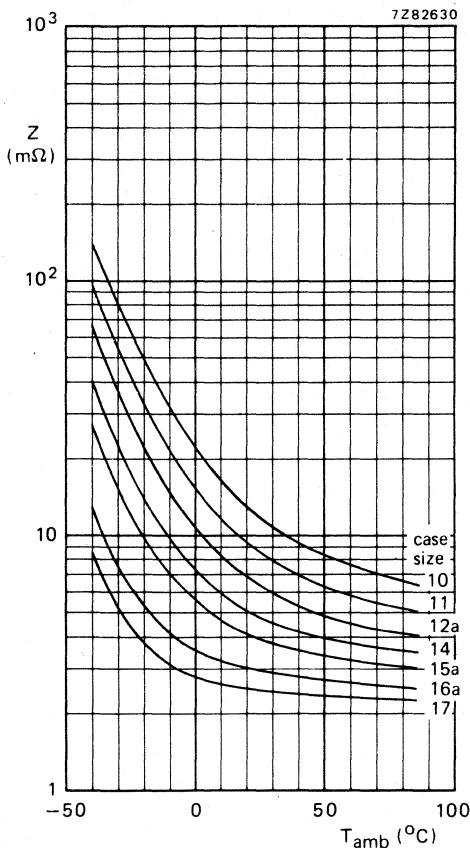


Fig. 7 Typical impedance as a function of temperature at 20 kHz, $U_R = 10 \text{ V}$.

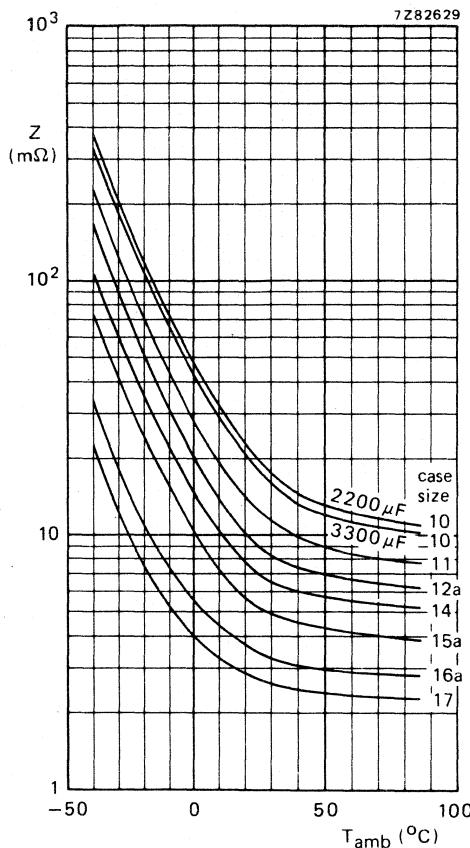


Fig. 8 Typical impedance as a function of temperature at 20 kHz, $U_R = 63 \text{ V}$.

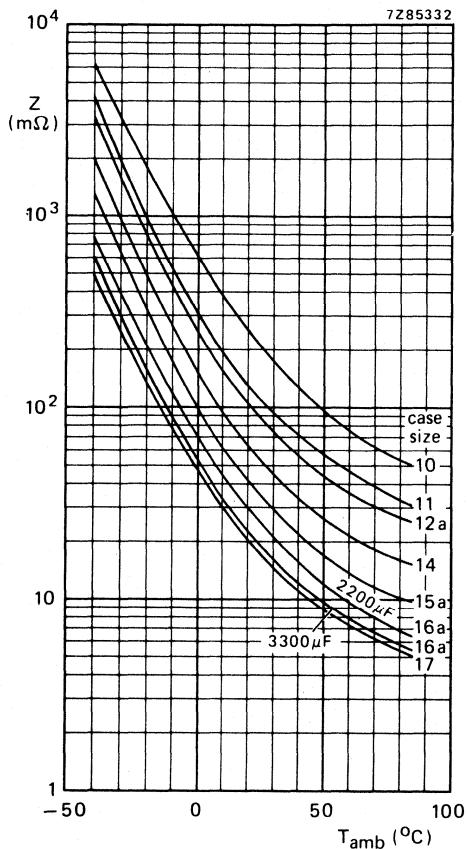


Fig. 9 Typical impedance as a function of temperature at 20 kHz, $U_R = 250$ V.

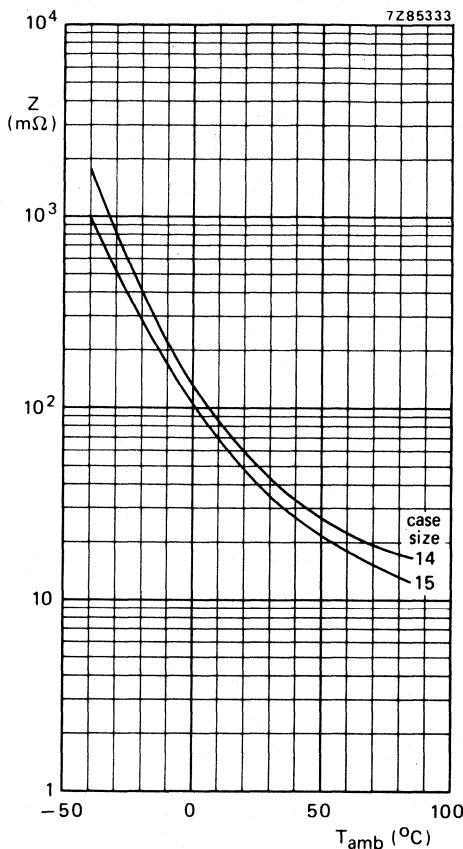


Fig. 10 Typical impedance as a function of temperature at 20 kHz, $U_R = 350$ V.

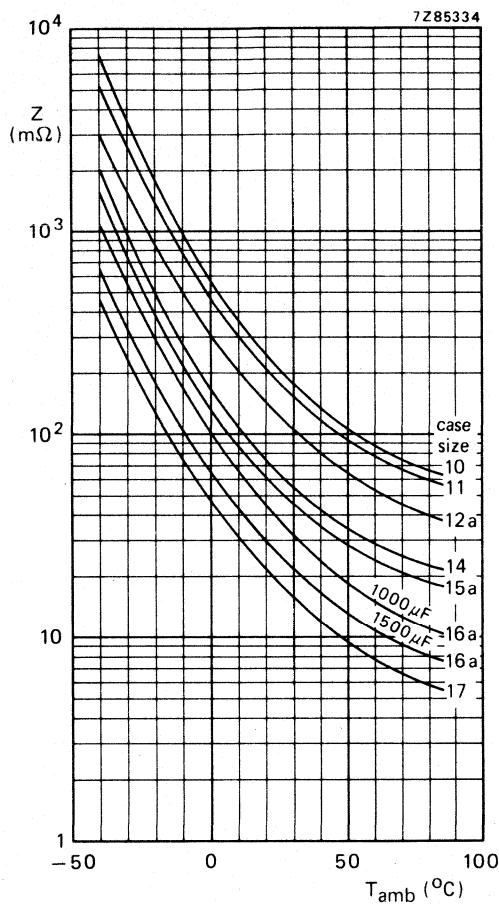


Fig. 11 Typical impedance as a function of temperature at 20 kHz, $U_R = 385$ V.

2222 114
2222 115

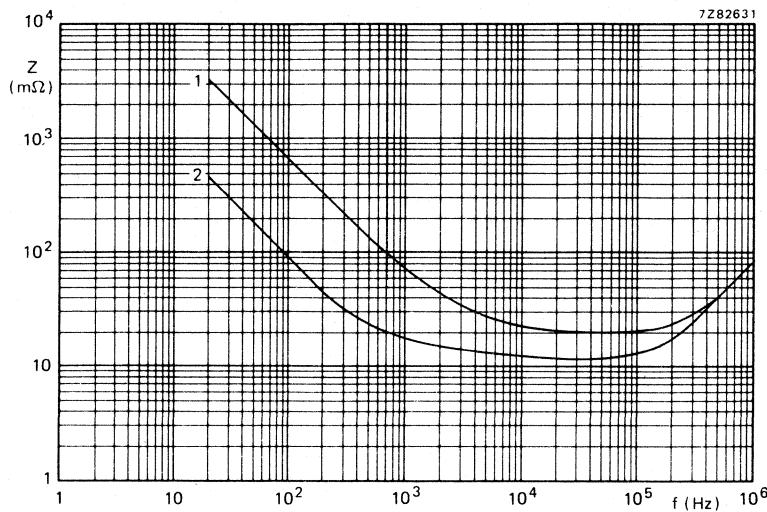


Fig. 12 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 10:
curve 1 = $2200 \mu\text{F}, 63 \text{ V}$;
curve 2 = $15000 \mu\text{F}, 10 \text{ V}$.

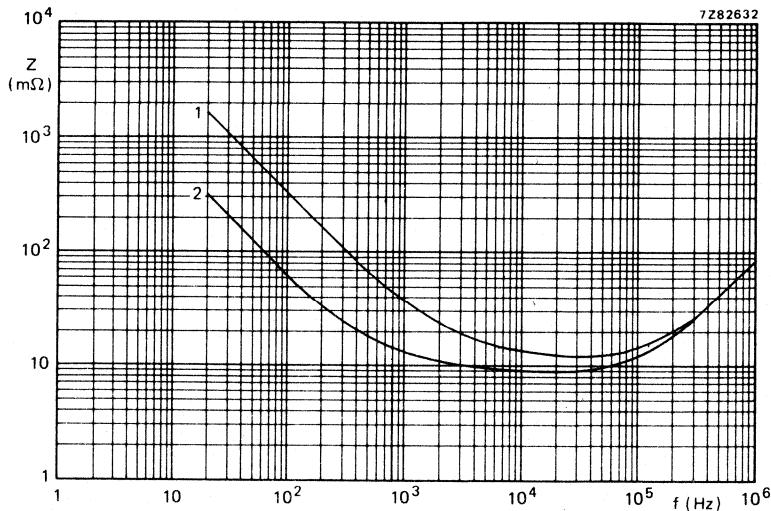


Fig. 13 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 11:
curve 1 = $4700 \mu\text{F}, 63 \text{ V}$;
curve 2 = $22000 \mu\text{F}, 10 \text{ V}$.

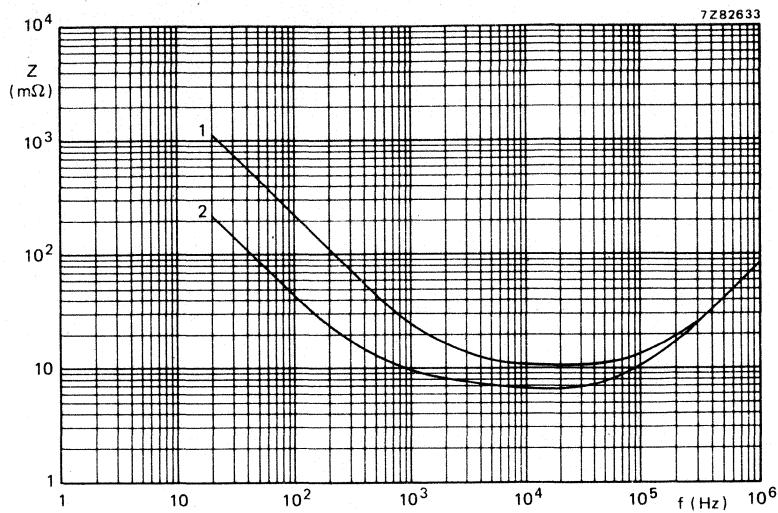


Fig. 14 Typical impedance as a function of frequency at $T_{\text{amb}} = 20 \text{ }^{\circ}\text{C}$; case size 12a;
curve 1 = $6800 \mu\text{F}, 63 \text{ V}$;
curve 2 = $33 000 \mu\text{F}, 10 \text{ V}$.

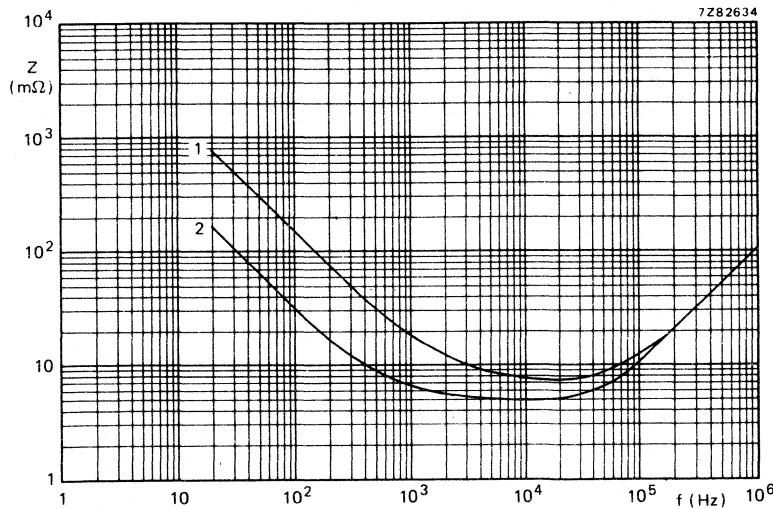


Fig. 15 Typical impedance as a function of frequency at $T_{\text{amb}} = 20 \text{ }^{\circ}\text{C}$; case size 14;
curve 1 = $10 000 \mu\text{F}, 63 \text{ V}$;
curve 2 = $47 000 \mu\text{F}, 10 \text{ V}$.

2222 114
2222 115

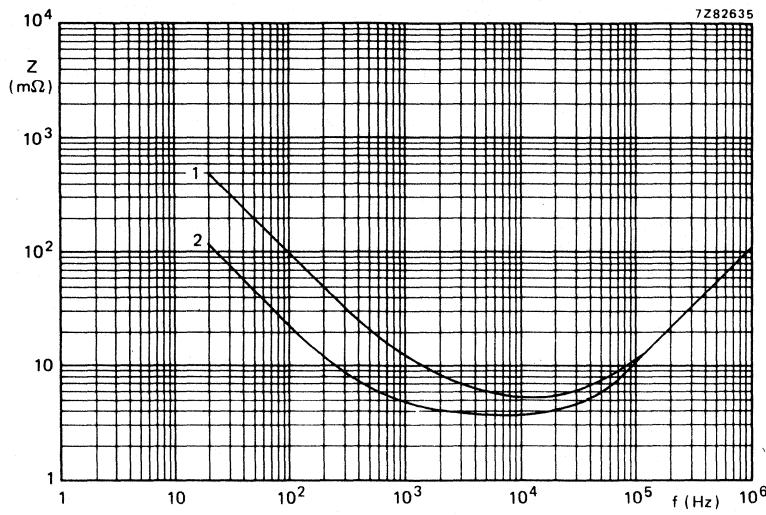


Fig. 16 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 15a;
curve 1 = $15\ 000\ \mu F$, 63 V;
curve 2 = $68\ 000\ \mu F$, 10 V.

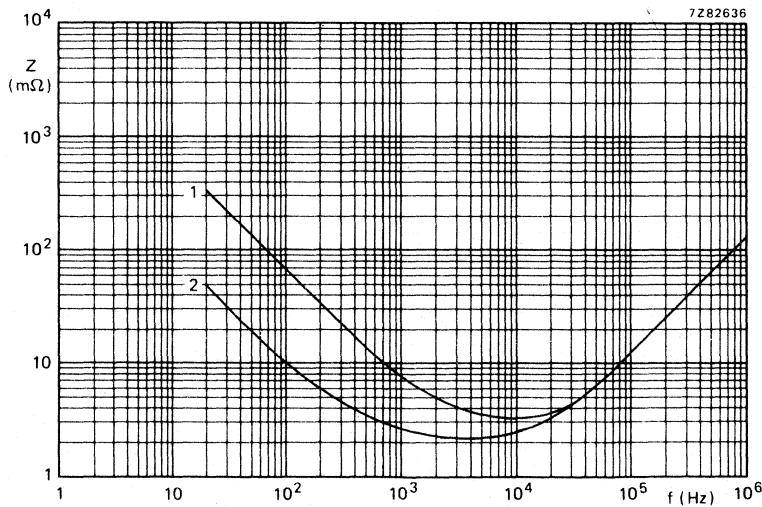


Fig. 17 Typical impedance as a function of frequency at $T_{amb} = 20$ °C; case size 16a;
curve 1 = $22\ 000\ \mu F$, 63 V;
curve 2 = $150\ 000\ \mu F$, 10 V.

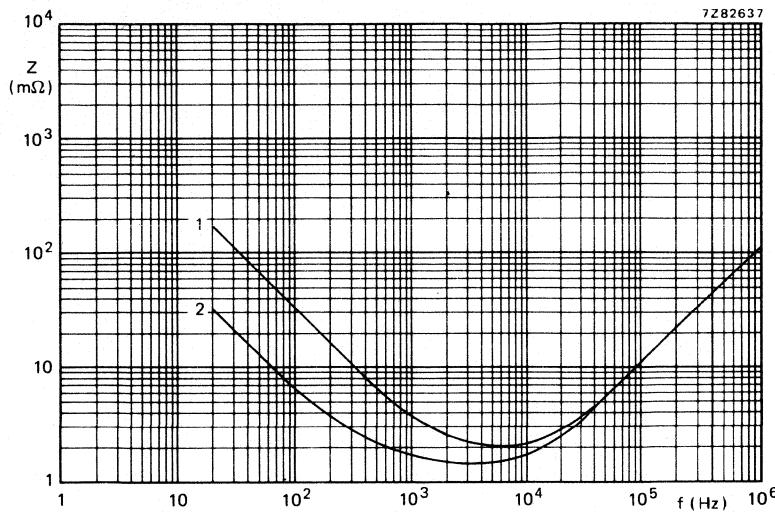


Fig. 18 Typical impedance as a function of frequency at $T_{amb} = 20\ ^\circ C$; case size 17:
curve 1 = $47\ 000\ \mu F$, $63\ V$;
curve 2 = $220\ 000\ \mu F$, $10\ V$.

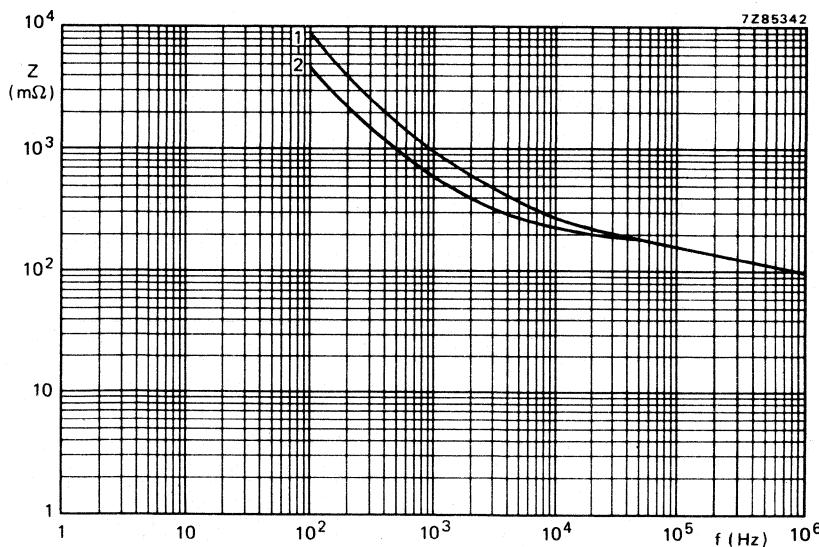


Fig. 19 Typical impedance as a function of frequency at $T_{amb} = 20\ ^\circ C$; case size 10:
curve 1 = $150\ \mu F$, $385\ V$;
curve 2 = $330\ \mu F$, $250\ V$.

2222 114
2222 115

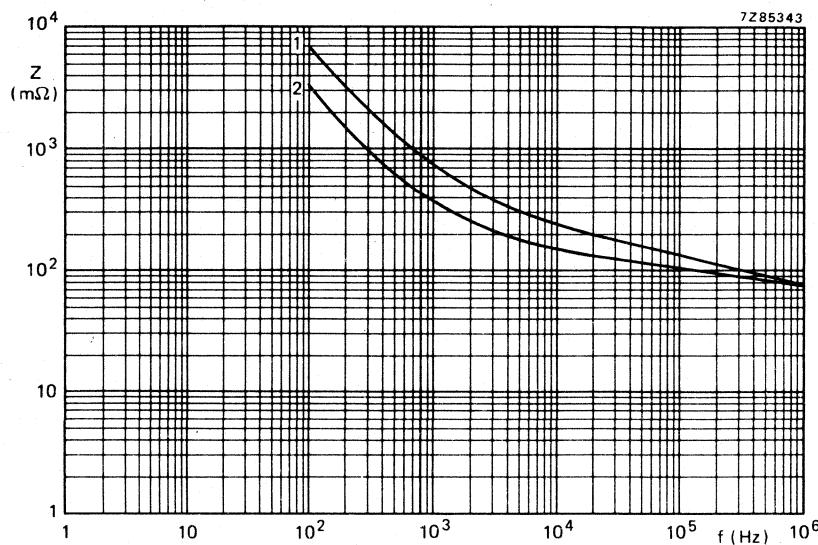


Fig. 20 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 11:
curve 1 = $220 \mu\text{F}, 385 \text{ V}$;
curve 2 = $470 \mu\text{F}, 250 \text{ V}$.

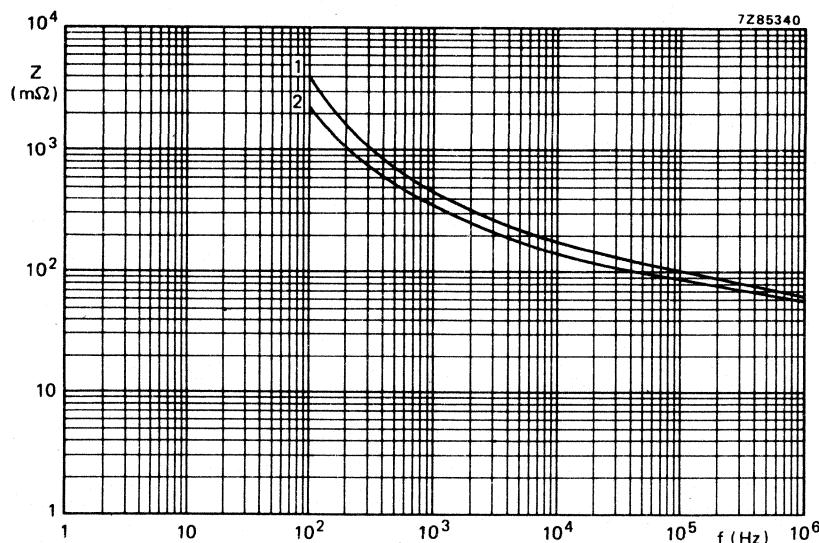


Fig. 21 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 12a:
curve 1 = $330 \mu\text{F}, 385 \text{ V}$;
curve 2 = $680 \mu\text{F}, 250 \text{ V}$.

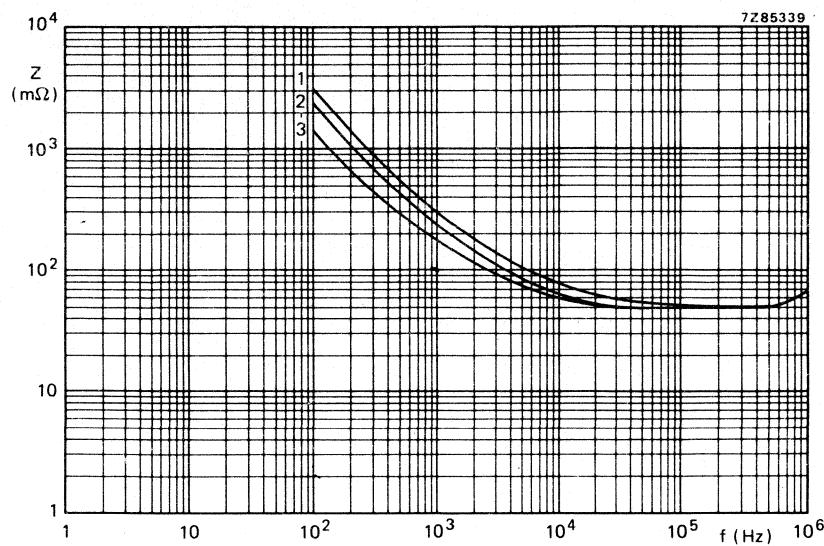


Fig. 22 Typical impedance as a function of frequency at $T_{amb} = 20 \text{ } ^\circ\text{C}$; case size 14:
 curve 1 = $470 \mu\text{F}, 385 \text{ V}$;
 curve 2 = $680 \mu\text{F}, 350 \text{ V}$;
 curve 3 = $1000 \mu\text{F}, 250 \text{ V}$.

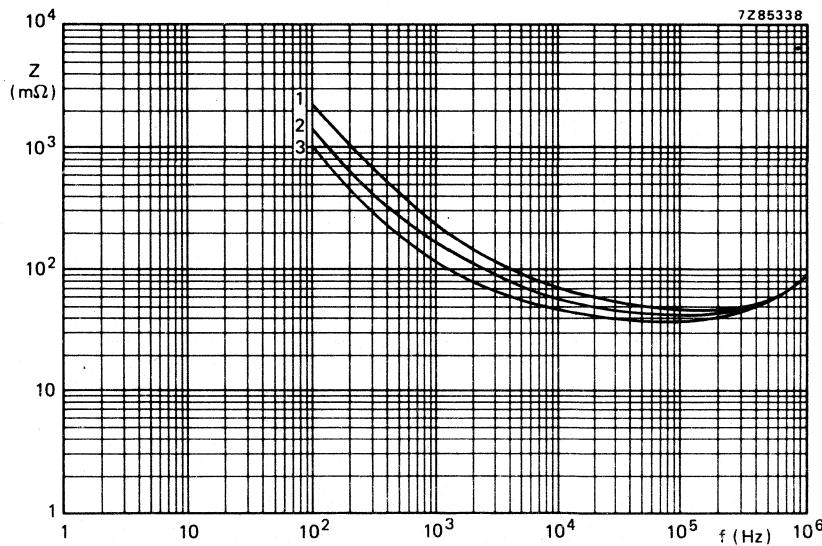


Fig. 23 Typical impedance as a function of frequency at $T_{amb} = 20 \text{ } ^\circ\text{C}$; case size 15a:
 curve 1 = $680 \mu\text{F}, 385 \text{ V}$;
 curve 2 = $1000 \mu\text{F}, 350 \text{ V}$;
 curve 3 = $1500 \mu\text{F}, 250 \text{ V}$.

2222 114

2222 115

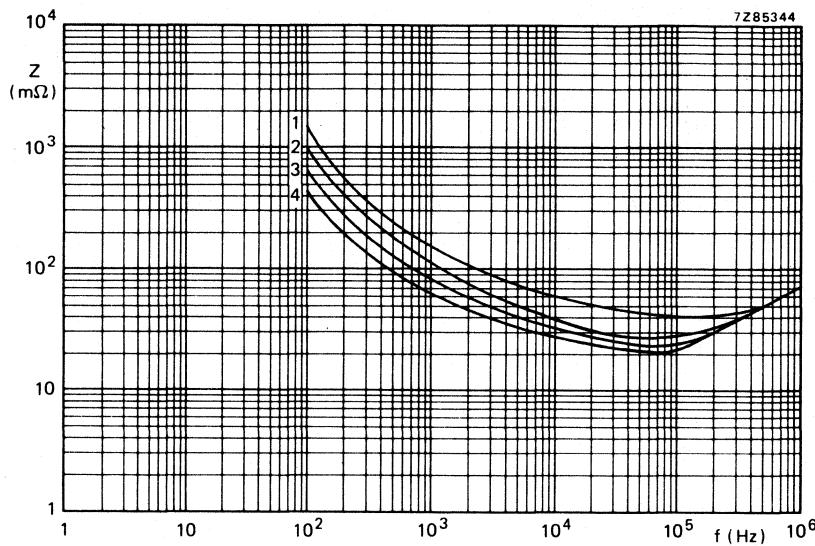


Fig. 24 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 16a:
curve 1 = $1000 \mu\text{F}$, 385 V;
curve 2 = $1500 \mu\text{F}$, 385 V;
curve 3 = $2200 \mu\text{F}$, 250 V;
curve 4 = $3300 \mu\text{F}$, 250 V.

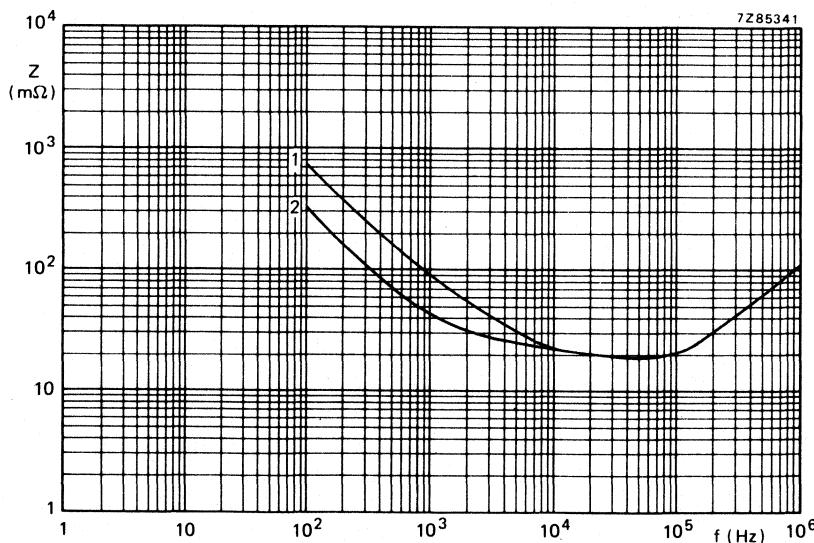


Fig. 25 Typical impedance as a function of frequency at $T_{amb} = 20^{\circ}\text{C}$; case size 17:
curve 1 = $2200 \mu\text{F}$, 385 V;
curve 2 = $4700 \mu\text{F}$, 250 V.

Equivalent series inductance (ESL)

case size	typ. inductance
10, 11 and 12a	13 nH
14 and 15a	16 nH
16a	19 nH
17	20 nH

OPERATIONAL DATA**Category temperature range (for rated voltage)**

-40 to + 85 °C

Life expectancy

Typical life time

> 10 000 h

at $T_{amb} = 85 \text{ }^{\circ}\text{C}$

> 200 000 h (25 years)

at $T_{amb} = 40 \text{ }^{\circ}\text{C}$ **Failure rate**Failure rate at rated voltage, $T_{amb} = 40 \text{ }^{\circ}\text{C}$

confidence level 60%

 $< 10^{-7}$

catastrophic

 $< 3 \times 10^{-7}$

catastrophic + degradation

PACKING

The capacitors are packed in boxes.

Case sizes 10, 11, 12a, 14 and 15a: 50 capacitors per box;

case sizes 16a and 17: 25 capacitors per box.

TESTS AND REQUIREMENTS

See Data handbook, Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 114 and 2222 115 are large types with screw terminals, long-life grade.



2222 114
2222 115

MOUNTING ACCESSORIES

Clamps

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slipped over the capacitor and then clamped with a nut and bolt. The clamps have either two or three mounting lugs. Four types of clamp are available, one for each case diameter. They are delivered without nuts or bolts.

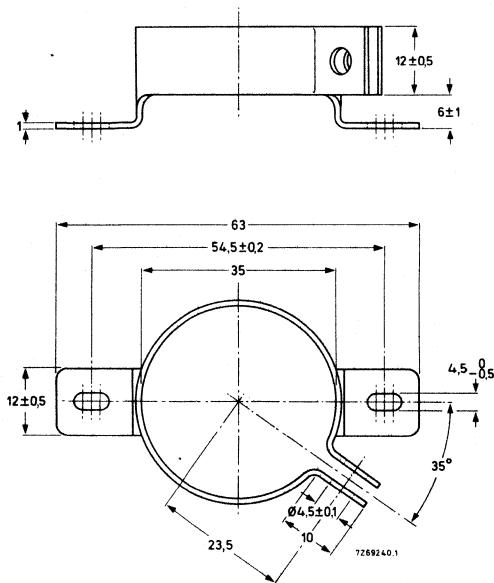


Fig. 26 Clamp for case diameter of 35 mm.
Catalogue number: 4322 043 04272.

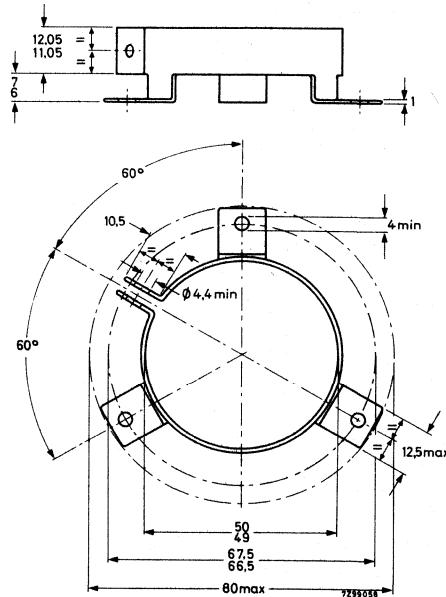


Fig. 27 Clamp for case diameter of 50 mm.
Catalogue number: 4322 043 04281.

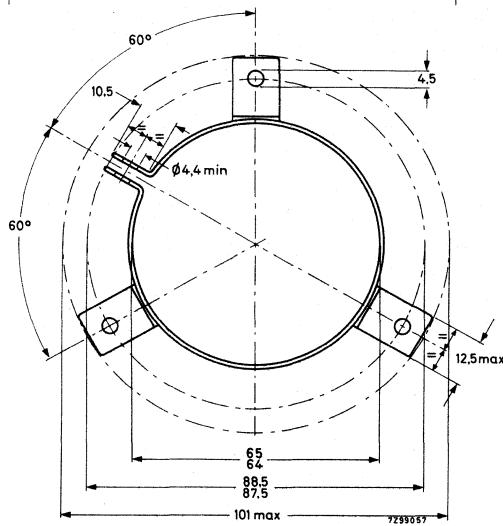
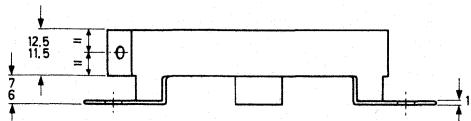


Fig. 28 Clamp for case diameter of 65 mm.
Catalogue number: 4322 043 04291.

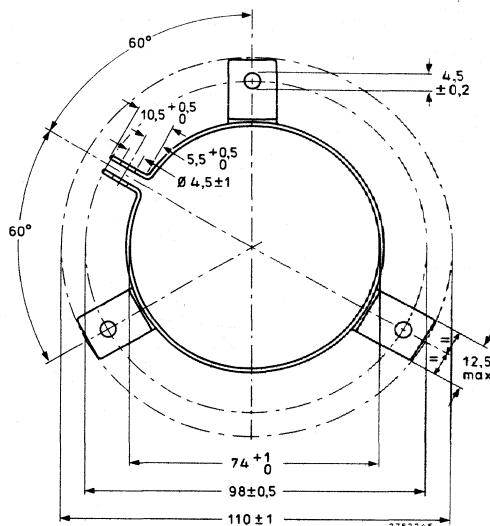
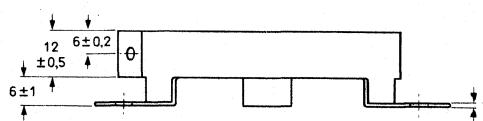


Fig. 29 Clamp for case diameter of 75 mm.
Catalogue number: 4322 043 12990.

Bolt/nut

When mounting with the bolt, which is an integral part of the case, standard metal M8 and M12 nuts and washers can be used. If insulated mounting is required, a synthetic nut and rubber washers are available.

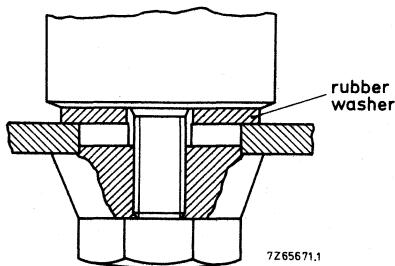


Fig. 30 Insulated mounting.





Fig. 31 Synthetic cap nut; see Table 6
for dimensions D, H and W.

2222 114
2222 115

Table 5

thread	D	H	W*	min. threaded depth	catalogue number
M8	25	15	17	11,5	4322 043 05561
M12	30	20	19	15,5	4322 043 05571



dimensions in mm

D	d	catalogue number
34	8,4	4322 043 05591
49	13	4322 043 05531
64	13	4322 043 05521
74	13	4322 043 13000

Fig. 32 Rubber washer; thickness 2 mm.

* W measured across flats.

SOLID ALUMINIUM CAPACITORS




$U_R = 6,3 \text{ to } 40 \text{ V}^*$

SOLID ALUMINIUM CAPACITORS



- Small type
- Axial leads; metal case
- Long life
- High reliability
- Industrial and military applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	2,2 to 330 μF
Tolerance on nominal capacitance	-20 to +20%
Rated voltage range, U_R (R5 series)	6,3 to 40 V
Category temperature range	-55 to +125 $^{\circ}\text{C}$
Endurance test at 125 $^{\circ}\text{C}$	5000 h
Basic specification	IEC 384-4, long-life grade
Climatic category, IEC 68	55/125/56
Approvals	CECC 30 302-001 U.K. Post Office FOA/FTL (Sweden)

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μF	U_R (V)				
	6,3	10	16	25	40
2,2					1
3,3					1
4,7			1	2	
6,8				2	
10		1	2	3	
15	1	2			
22	1			3	4
33	2	3	4	5	
47	2	3	4	5	6
68	3		5	6	
100	4	6			
150	4	5			
220	5	6			
330	6				

nominal dimensions (mm)	
1	\emptyset 6,5 x 17
2	\emptyset 6,5 x 23
3	\emptyset 8 x 23
4	\emptyset 10 x 23
5	\emptyset 10 x 31
6	\emptyset 12,5 x 31

* For 50 V version, see the relevant data sheet

APPLICATION

These capacitors utilize advanced technology to achieve long life, high stability, excellent reliability, high ripple current rating and low temperature dependence. The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

DESCRIPTION

The capacitor has etched aluminium foil electrodes separated by a layer of semiconductive material. The electrolyte is pyrolytically formed manganese dioxide. The capacitor is housed in an aluminium case with axial leads and is sealed by a ceramic disc. The cathode lead is welded to the case, which is insulated with a blue transparent plastic sleeve.

MECHANICAL DATA

Dimensions in mm

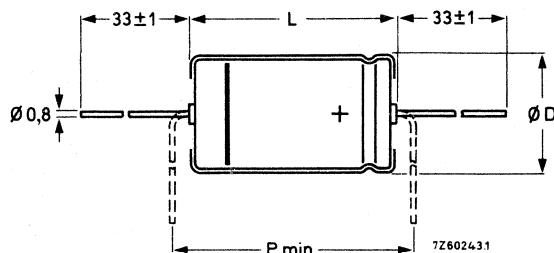


Fig. 1 For dimensions D, L and P, see Table 1.

Table 1

case size	D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	mass approx. g
1	6,5	17	6,6	17,5	20	1,2
2	6,5	23	6,6	24	27,5	1,6
3	8	23	8,3	24	27,5	2,4
4	10	23	10,4	24	27,5	3,3
5	10	31	10,4	32	35	4,5
6	12,5	31	12,9	32	35	6,3

Marking

Stamped on the case are: catalogue number, capacitance, rated and derated voltages at corresponding maximum temperatures, date code, a band to identify the negative terminal and "+" signs for the positive terminal.

Mounting

No special provisions are required for soldering to the tinned leads.
(2 mm of the anode lead nearest the body are not solderable.)

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nom. cap.	max. r.m.s. ripple current at $T_{amb} = 85 \text{ }^{\circ}\text{C}$ * mA	max. leakage current at U_R after 5 min (μA)*	max. tan δ *	typ. ESR*	max. impedance at 100 kHz*	case size	catalogue number
V	μF			Ω	Ω			
6,3	22	45	12,5	0,18	6,51	2,5	1	2222 121 13229
	47	75	25	0,18	3,05	1,25	2	121 13479
	68	105	40	0,18	2,34	0,75	3	121 13689
	150	170	70	0,18	0,95	0,5	4	121 13151
	220	240	125	0,18	0,80	0,4	5	121 13221
	330	335	150	0,18	0,53	0,4	6	121 13331
10	15	40	15	0,16	7,43	2,5	1	121 14159
	33	70	30	0,16	3,86	1,25	2	121 14339
	47	90	47	0,16	2,71	0,75	3	121 14479
	100	145	80	0,16	1,59	0,5	4	121 14101
	150	220	150	0,16	1,17	0,4	5	121 14151
	220	290	200	0,16	0,58	0,4	6	121 14221
16	10	35	16	0,14	9,55	2,5	1	121 15109
	15	50	24	0,14	5,31	1,25	2	121 15159
	33	100	53	0,14	2,89	0,75	3	121 15339
	47	110	75	0,14	1,69	0,5	4	121 15479
	68	150	109	0,14	1,64	0,4	5	121 15689
	100	205	160	0,14	0,95	0,4	6	121 15101
25	4,7	25	12	0,14	16,93	5	1	121 16478
	10	40	25	0,14	11,14	2,5	2	121 16109
	22	70	55	0,14	5,06	1,5	3	121 16229
	33	90	83	0,14	3,86	1	4	121 16339
	47	130	118	0,14	4,06	0,8	5	121 16479
	68	170	170	0,14	1,87	0,5	6	121 16689
40	2,2	20	9	0,12	28,94	5	1	121 17228
	3,3	25	13	0,12	19,29	5	1	121 17338
	4,7	35	19	0,12	16,93	2,5	2	121 17478
	6,8	40	27	0,12	11,70	2,5	2	121 17688
	10	55	40	0,12	9,55	1,5	3	121 17109
	22	90	88	0,12	6,51	1	4	121 17229
	33	125	132	0,12	4,34	0,8	5	121 17339
	47	165	188	0,12	2,37	0,5	6	121 17479

* See also corresponding paragraph.

CapacitanceNominal capacitance values at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

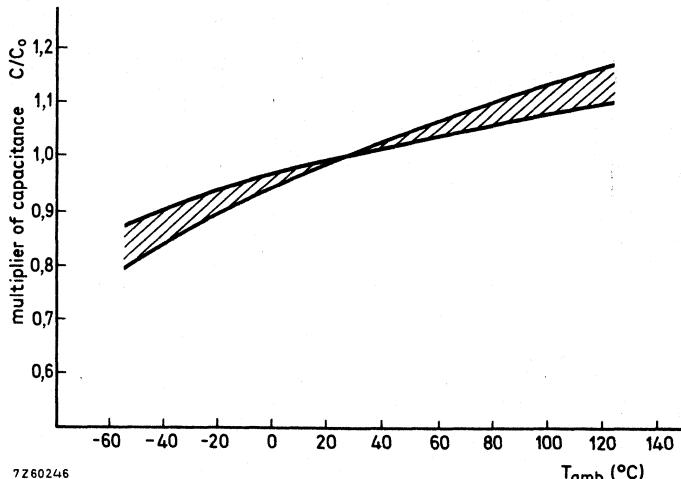


Fig. 2 Typical capacitance as a function of ambient temperature.
 C_0 = capacitance at 25°C , 100 Hz.

Voltage

Rated voltage	= max. permissible voltage at $\leq 125^{\circ}\text{C}$	see Table 2, U_R
Ripple voltage*	= max. permissible a.c. voltage providing the following three conditions are met:	
	a) max. (d.c. + peak a.c.) voltage	$\leq U_R$
	b) max. peak a.c. voltage with d.c. voltage applied	$\leq 1,15 \times$ applied d.c. voltage
	c) max. peak a.c. voltage, 50 Hz, without d.c. voltage applied	$0,8 \times U_R$
Surge voltage	= max. permissible voltage for short periods (see also "Tests and requirements")	$1,15 \times U_R$
Reverse voltage	= max. d.c. voltage continuously (2000 h) applied in the reverse polarity at the maximum category temperature at $\leq 85^{\circ}\text{C}$ at $> 85^{\circ}\text{C}$ up to 125°C	$0,30 \times U_R$ $0,15 \times U_R$

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current *

Maximum permissible r.m.s. ripple current at 100 Hz and $T_{amb} = 85^{\circ}\text{C}$ see Table 2

The maximum permissible ripple current ($I_{r\max}$) is a function of temperature and frequency:

$$I_{r\max} = I_{r0} \sqrt{k_r}$$

where I_{r0} = max. ripple current at 100 Hz up to 85°C , see Table 2

k = temperature derating factor = P_{\max}/P_0

r = frequency dependent derating factor = R_{s0}/R_s

while P_{\max} = max. permissible power dissipation, temperature dependent

P_0 = max. permissible power dissipation up to 85°C = $(I_{r0})^2 R_{s0}$

R_{s0} = series resistance at 100 Hz = $\frac{\tan \delta}{628C}$, C and $\tan \delta$ to be read from Table 2

R_s = series resistance, frequency dependent (temperature dependence neglected).

The formula is derived as follows:

$$(I_{r\max})^2 = P_{\max}/R_s = k(I_{r0})^2 R_{s0}/R_s;$$

$$\text{thus } I_{r\max} = I_{r0} \sqrt{k_r} \text{ (see Table 2 and Fig. 3).}$$

* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

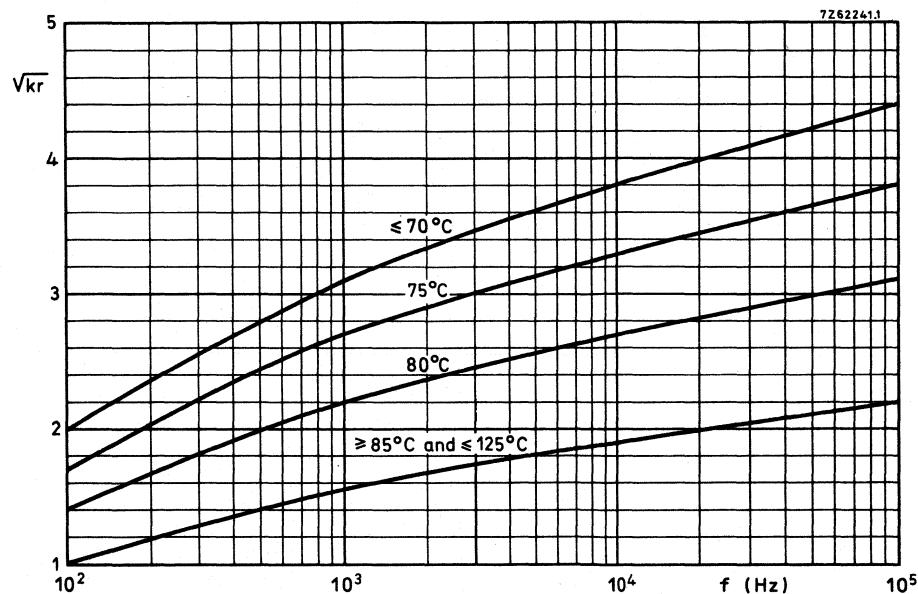


Fig. 3 Factor $\sqrt{k_r}$ as a function of frequency for calculation of maximum ripple current.

Leakage current

Maximum leakage current 5 min after application of the rated voltage

Leakage current during continuous operation at U_R ,
 at 25 °C
 at 85 °C
 at 125 °C

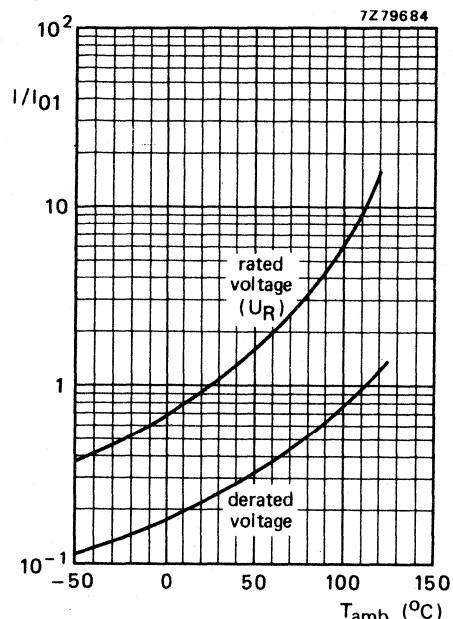


Fig. 4 Multiplier I/I_{01} as a function of ambient temperature; I_{01} = leakage current during continuous operation at $T_{amb} = 25$ °C at U_R .

see Table 2 (0,1 CU)

approx. 0,4 of value stated in Table 2
 approx. 4 of value stated in Table 2
 approx. 7 of value stated in Table 2

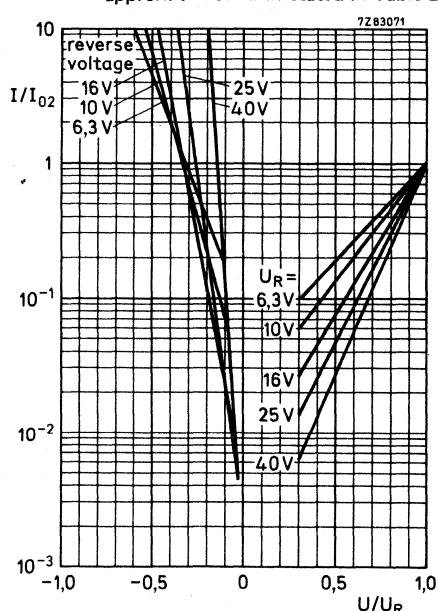


Fig. 5 Multiplier I/I_{02} as a function of U/U_R ;
 I_{02} = leakage current at U_R at a discrete constant temperature.

Tan δ (dissipation factor)

Tan δ at 100 Hz, measured by means of a four-terminal circuit
(Thomson circuit) (max. values)

see Table 2

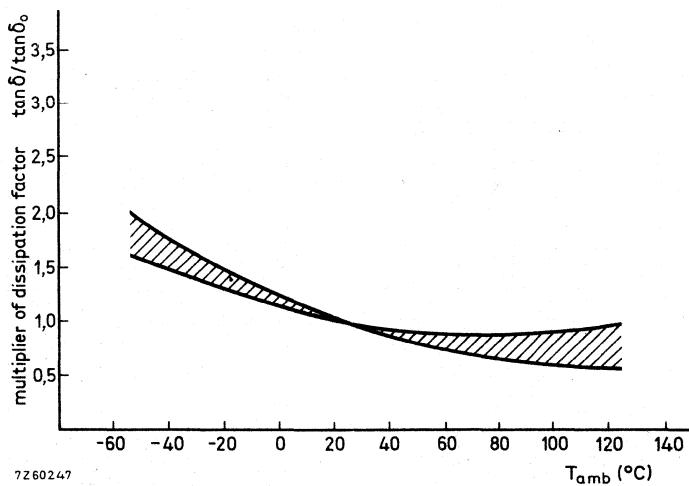


Fig. 6 Typical dissipation factor as a function of ambient temperature;
 $\tan \delta_0$ = dissipation factor at 25 °C, 100 Hz.

Impedance

Impedance at 100 kHz, measured by means of a four-terminal circuit
 (Thomson circuit) (max. values)

Typical impedance as a function of ambient temperature at 100 kHz

see Table 2
 see Figs 7 to 12

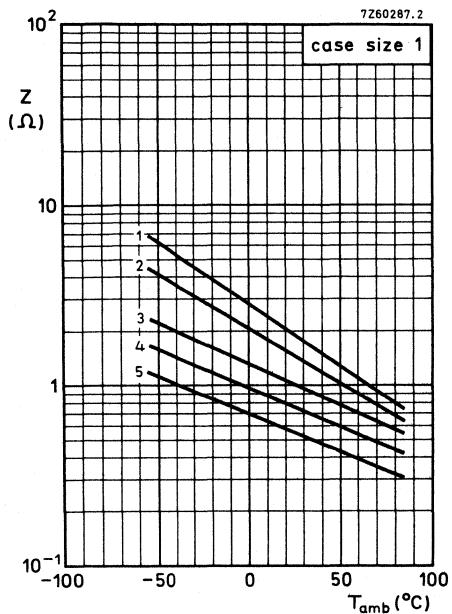


Fig. 7.

Curve 1 = 2,2 µF, 40 V
 2 = 4,7 µF, 25 V
 3 = 10 µF, 10 V
 4 = 15 µF, 10 V
 5 = 22 µF, 6,3 V

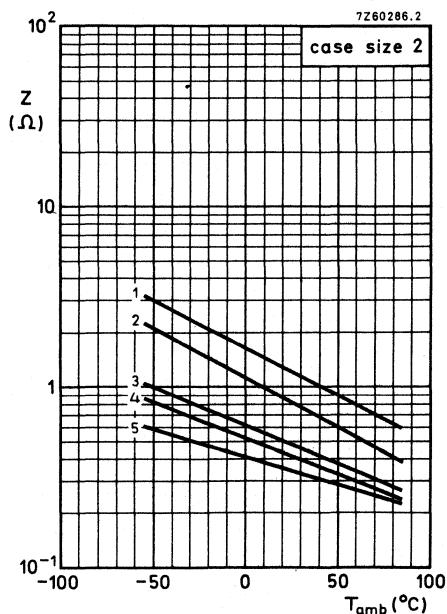


Fig. 8.

Curve 1 = 4,7 µF, 40 V
 2 = 10 µF, 25 V
 3 = 15 µF, 16 V
 4 = 33 µF, 10 V
 5 = 47 µF, 6,3 V

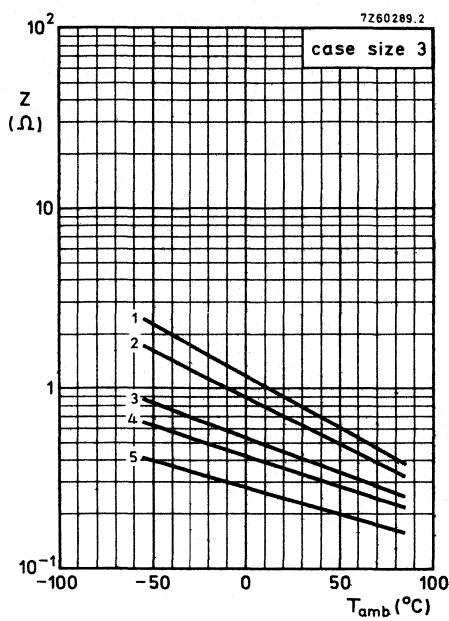


Fig. 9.

Curve 1 = 10 μ F, 40 V
 2 = 22 μ F, 25 V
 3 = 33 μ F, 16 V
 4 = 47 μ F, 10 V
 5 = 68 μ F, 6,3 V

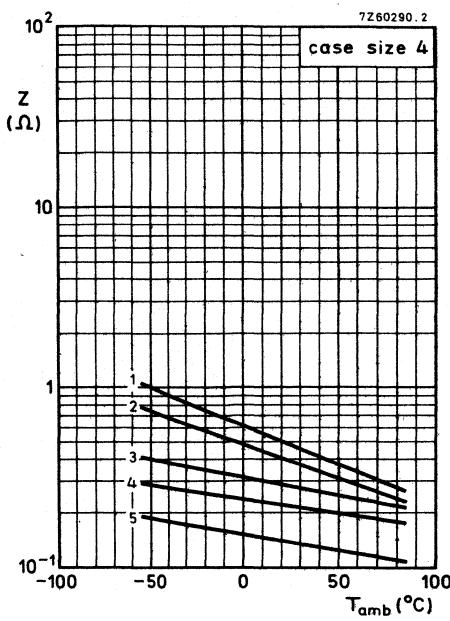


Fig. 10.

Curve 1 = 22 μ F, 40 V
 2 = 33 μ F, 25 V
 3 = 47 μ F, 16 V
 4 = 100 μ F, 10 V
 5 = 150 μ F, 6,3 V

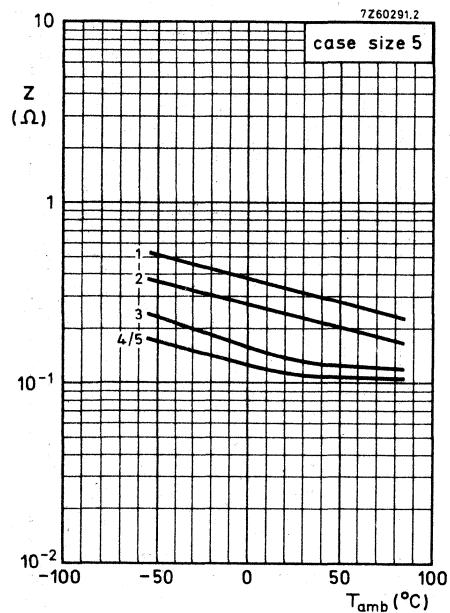


Fig. 11.

Curve 1 = $33 \mu\text{F}, 40 \text{ V}$
 2 = $47 \mu\text{F}, 25 \text{ V}$
 3 = $68 \mu\text{F}, 16 \text{ V}$
 4 = $150 \mu\text{F}, 10 \text{ V}$
 5 = $220 \mu\text{F}, 6,3 \text{ V}$

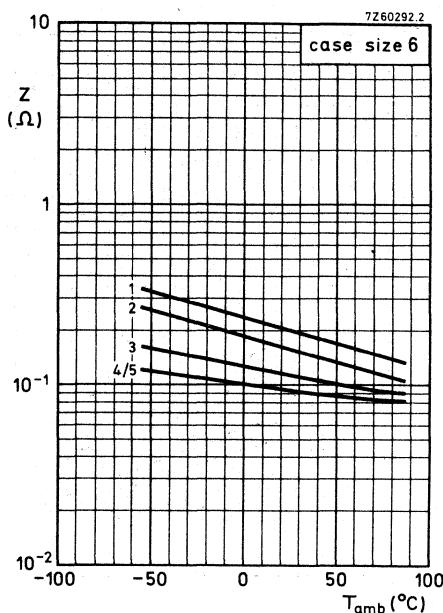


Fig. 12.

Curve 1 = $47 \mu\text{F}, 40 \text{ V}$
 2 = $68 \mu\text{F}, 25 \text{ V}$
 3 = $100 \mu\text{F}, 16 \text{ V}$
 4 = $220 \mu\text{F}, 10 \text{ V}$
 5 = $330 \mu\text{F}, 6,3 \text{ V}$

Typical impedance as a function of frequency at 25 °C

see Figs 13 and 14.


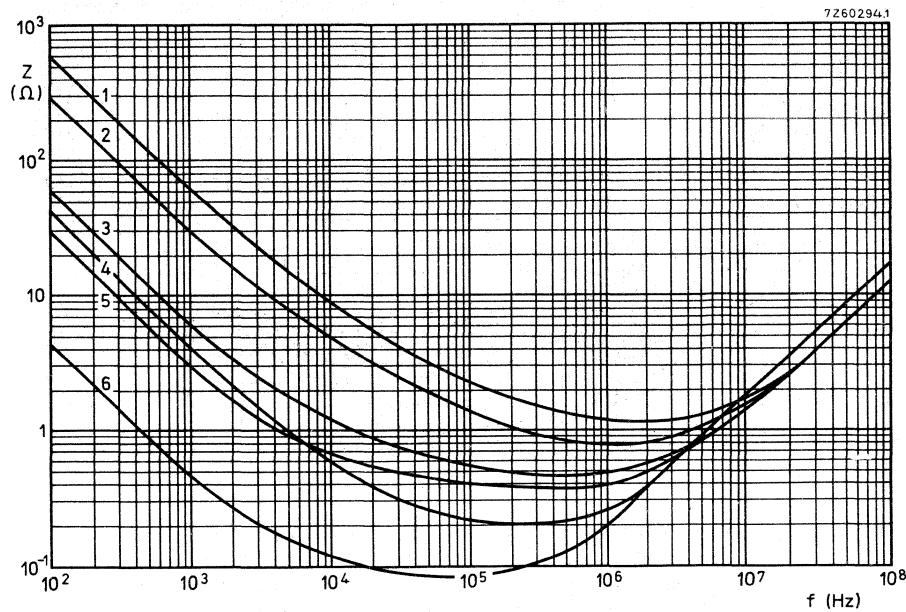


Fig. 13.

Curve 1 = $2.2 \mu\text{F}, 40 \text{ V}$
 2 = $4.7 \mu\text{F}, 40 \text{ V}$
 3 = $22 \mu\text{F}, 6.3 \text{ V}$
 4 = $47 \mu\text{F}, 40 \text{ V}$
 5 = $47 \mu\text{F}, 6.3 \text{ V}$
 6 = $330 \mu\text{F}, 6.3 \text{ V}$

curve 1 + 3 = case size 1
 curve 2 + 5 = case size 2
 curve 4 + 6 = case size 6

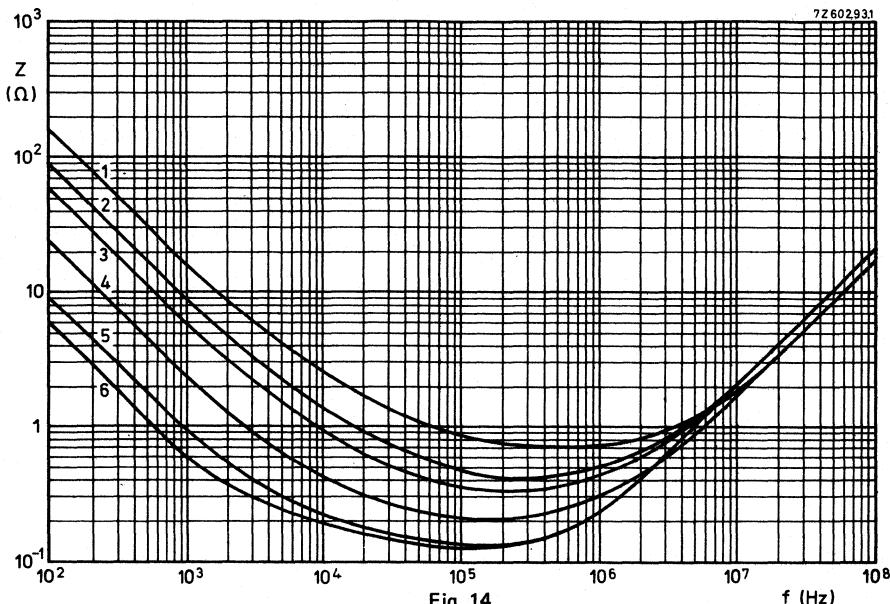

Curve 1 = $10 \mu\text{F}, 40 \text{ V}$
 2 = $22 \mu\text{F}, 40 \text{ V}$
 3 = $33 \mu\text{F}, 40 \text{ V}$
 4 = $68 \mu\text{F}, 6,3 \text{ V}$
 5 = $150 \mu\text{F}, 6,3 \text{ V}$
 6 = $220 \mu\text{F}, 6,3 \text{ V}$

curve 1 + 4 = case size 3
 curve 2 + 5 = case size 4
 curve 3 + 6 = case size 5

Equivalent series resistance (ESR = $\tan \delta / \omega C$)

ESR at 100 Hz and $T_{\text{amb}} = 20^\circ\text{C}$

see Table 2

Self inductance

20 to 30 nH (typical values)

OPERATIONAL DATA

Category temperature range

-55 to $+125^\circ\text{C}$

Life expectancy

at 125°C and U_R	> 20 000 hours
at 150°C and U_R	> 5000 hours
at 175°C and U_R	> 2000 hours

PACKING

100 pieces per box.


TESTS AND REQUIREMENTS

See Introduction, section 9, under solid aluminium capacitors.

$U_R = 50 \text{ V} ^*$

SOLID ALUMINIUM CAPACITORS

- Small type
- Long life
- Industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	2,2 to 33 μF
Tolerance on nominal capacitance	-20 to +20%
Rated voltage, U_R	50 V
Category temperature range	-55 to +125 °C
Endurance test at 125 °C	5000 h
Climatic category, IEC 68	
at 50 V	55/085/56
at 40 V	55/125/56

U_R (V)	C_{nom} (μF)	case size	nominal dimensions (mm)
50	2,2	1	Ø 6,5 x 17
	4,7	2	Ø 6,5 x 23
	6,8	3	Ø 8 x 23
	15	4	Ø 10 x 23
	22	5	Ø 10 x 31
	33	6	Ø 12,5 x 31

APPLICATION

These capacitors utilize advanced technology to achieve long life, high stability, high ripple current rating and low temperature dependence. The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

* For 6,3 to 40 V versions, see the relevant data sheet.

DESCRIPTION

The capacitor has etched aluminium foil electrodes separated by a layer of semiconductive material. The electrolyte is pyrolytically formed manganese dioxide. The capacitor is housed in an aluminium case with axial leads and is sealed by a ceramic disc. The cathode lead is welded to the case, which is insulated with a blue transparent plastic sleeve.

MECHANICAL DATA

Dimensions in mm

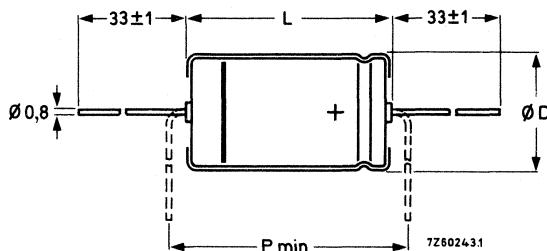


Fig. 1 See Table 1 for dimensions D, L and P.

Table 1

case size	D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	mass approx. g
1	6,5	17	6,6	17,5	20	1,2
2	6,5	23	6,6	24	27,5	1,6
3	8	23	8,3	24	27,5	2,4
4	10	23	10,4	24	27,5	3,3
5	10	31	10,4	32	35	4,5
6	12,5	31	12,9	32	35	6,3

Marking

Stamped on the case are: catalogue number, capacitance, rated and derated voltages at corresponding maximum temperatures, date code, a band to identify the negative terminal and "+" signs for the positive terminal.

Mounting

No special provisions are required for soldering to the tinned leads.
(2 mm of the anode lead nearest the body are not solderable.)

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R V	nom. cap. μF	max. r.m.s. ripple current at $T_{amb} = 85 \text{ }^{\circ}\text{C}$ mA*	max. leakage current at U_R after 5 min μA^*	max. tan δ	typ. ESR Ω^*	max. impedance at 100 kHz Ω^*	case size	catalogue number
50	2,2	14	11	0,25	60	20	1	2222 121 18228
	4,7	25	24	0,25	35	10	2	121 18478
	6,8	30	34	0,25	29	6	3	121 18688
	15	60	75	0,25	13	4	4	121 18159
	22	80	110	0,25	11	3,2	5	121 18229
	33	110	165	0,25	6	2	6	121 18339

Capacitance

Nominal capacitance values at 100 Hz and $T_{amb} = 20 \text{ }^{\circ}\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 2

-20 to + 20%

* See also corresponding paragraph.

Voltage

Rated voltage (U_R) = max. permissible voltage
at $\leq 85^\circ\text{C}$

50 V*

Derated voltage = max. permissible voltage at
 $> 85^\circ\text{C}$ up to $+125^\circ\text{C}$

40 V

Ripple voltage ** = max. permissible a.c. voltage
providing the following three
conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage with
d.c. voltage applied
- c) max. peak a.c. voltage without
d.c. voltage applied

Surge voltage = max. permissible voltage up to 500 h

Reverse voltage = max. d.c. voltage applied in the
reverse polarity at the maximum
category temperature for short
periods (see also "Tests and require-
ments")

	$\leq 85^\circ\text{C}$	$> 85^\circ\text{C}$ up to 125°C
	50 V	≤ 40 V
		$\leq 1,15$ applied d.c. voltage
	0,15 x U_R	0,15 x derated voltage
	63 V	45 V
		0,15 x U_R
		0,15 x derated voltage

* Up to 500 h at 85°C , 63 V is permissible.

** Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current

Maximum permissible r.m.s. ripple current at 100 Hz and $T_{amb} = 85^{\circ}\text{C}$: see Table 2.

The maximum permissible ripple current ($I_{r\max}$) is a function of temperature and frequency:

$$I_{r\max} = I_{r0}\sqrt{kr}$$

where I_{r0} = max. ripple current at 100 Hz up to 85°C , see Table 2

k = temperature derating factor = P_{\max}/P_0

r = frequency dependent derating factor = R_{s0}/R_s

while P_{\max} = max. permissible power dissipation, temperature dependent

P_0 = max. permissible power dissipation up to 85°C = $(I_{r0})^2 R_{s0}$

R_{s0} = series resistance at 100 Hz = $\frac{\tan \delta}{628C}$, C and $\tan \delta$ to be read from Table 2

R_s = series resistance, frequency dependent (temperature dependence neglected).

The formula is derived as follows:

$$(I_{r\max})^2 = P_{\max}/R_s = k(I_{r0})^2 R_{s0}/R_s$$

thus $I_{r\max} = I_{r0}\sqrt{kr}$ (see Table 2 and graph below).

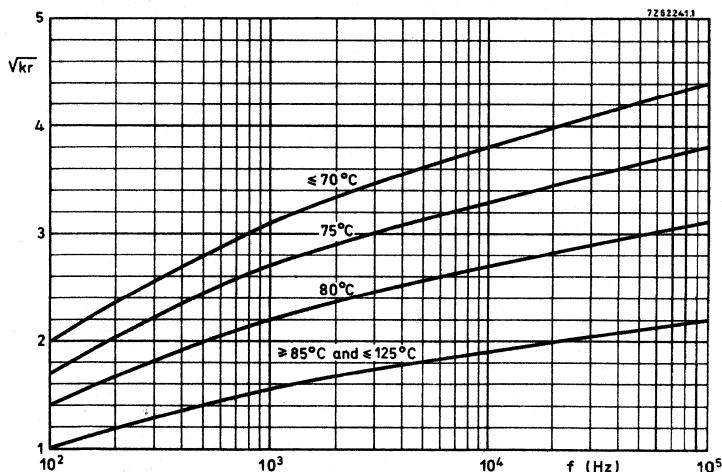


Fig. 2 Factor \sqrt{kr} as a function of frequency for calculation of maximum ripple current.

* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Leakage current

Maximum leakage current 5 min after application
of the rated voltage

see Table 2 (0,1 CU)

Leakage current during continuous operation at U_R ,
at 25 °C

approx. 0,4 x value stated
in Table 2

at 85 °C as well as at derated voltage and 125 °C

approx. 4 x value stated in
Table 2

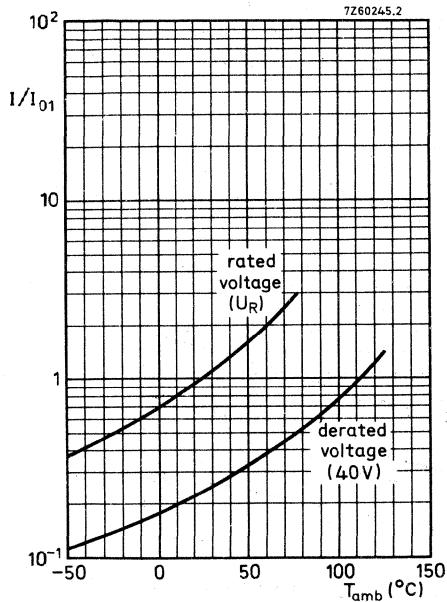


Fig. 3 Multiplier I/I_{01} as a function of
temperature; I_{01} = leakage current during
continuous operation at $T_{amb} = 25$ °C at U_R .

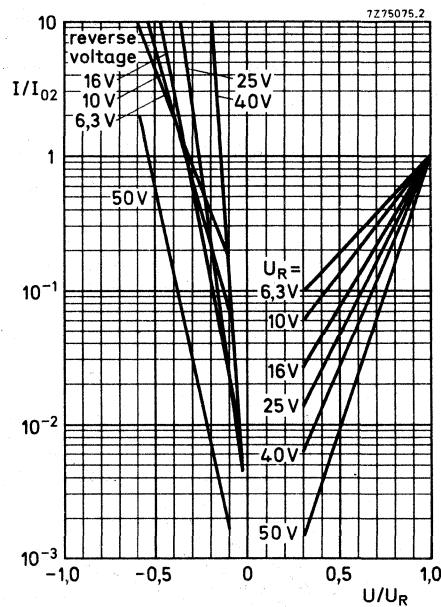


Fig. 4 Multiplier I/I_{02} as a function of U/U_R ;
 I_{02} = leakage current at U_R at a discrete
constant temperature.

Tan δ (dissipation factor)

Tan δ at 100 Hz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Impedance

Impedance at 100 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

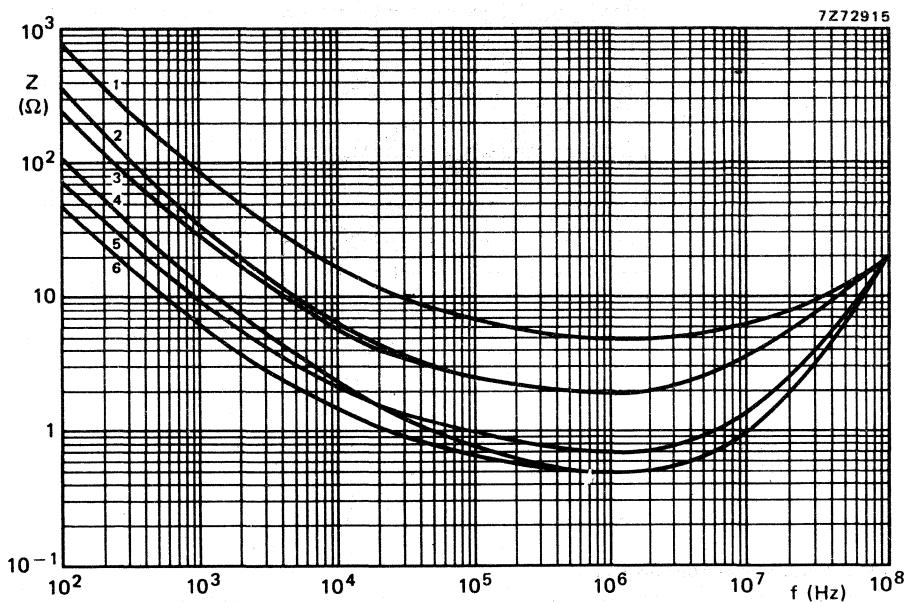


Fig. 5 Typical impedance as a function of frequency at 25 °C.

Curve 1 = 2,2 µF, 50 V;	Curve 4 = 15 µF, 50 V;
2 = 4,7 µF, 50 V;	5 = 22 µF, 50 V;
3 = 6,8 µF, 50 V;	6 = 33 µF, 50 V.

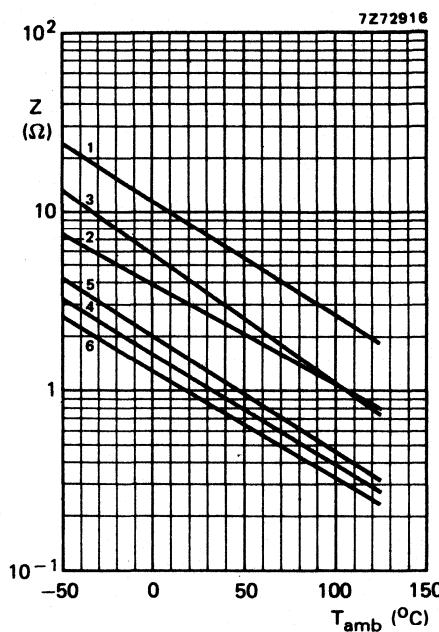


Fig. 6 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = $2.2 \mu\text{F}, 50 \text{ V}$; Curve 4 = $15 \mu\text{F}, 50 \text{ V}$;
 2 = $4.7 \mu\text{F}, 50 \text{ V}$; 5 = $22 \mu\text{F}, 50 \text{ V}$;
 3 = $6.8 \mu\text{F}, 50 \text{ V}$; 6 = $33 \mu\text{F}, 50 \text{ V}$.

Equivalent series resistance (ESR = $\tan \delta / \omega C$)ESR at 100 Hz and $T_{\text{amb}} = 20 {}^{\circ}\text{C}$ (typical values)

see Table 2

Self inductance

20 to 30 mH (typical values)

OPERATIONAL DATA**Category temperature range**

for rated voltage	-55 to +85 ${}^{\circ}\text{C}$
for derated voltage (= 40 V)	-55 to +125 ${}^{\circ}\text{C}$

Life expectancy

at 85 ${}^{\circ}\text{C}$ and U_R or	$\geq 10\,000\text{ h}$
at 125 ${}^{\circ}\text{C}$ and derated voltage (= 40 V)	


PACKING

100 pieces per box.



SOLID ALUMINIUM CAPACITORS

- Miniature type
- Single ended
- Resin dipped
- Long life
- No derating at maximum temperature
- General and industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)

0,1 to 68 μF

Tolerance on nominal capacitance

$\pm 20\%$; $\pm 10\%$

Rated voltage range, U_R (R5 series)

6,3 to 40 V

Category temperature range

-55 to + 125 °C

Endurance test

5000 h

at 85 °C

2000 h

at 125 °C

IEC 384-4, long-life grade

Basic specification

55/125/56

Climatic category, IEC 68

CECC 30 302-002

Approval

Selection chart for C_{nom} — U_R and relevant case sizes.

C_{nom} μF	U_R (V)				
	6,3	10	16	25	40*
0,1					1
0,15					1
0,22					1
0,33					1
0,47					2
0,68				1	2
1				1	3
1,5				1	4
2,2			1	2	4
3,3			1	2	4 **
4,7	1	2	3		
6,8	1	2	4		
10	1	2	3	4 **	
15	2	2	4		
22	2	3			
33	3	4			
47	4				
68	4				

case size	maximum dimensions (mm)
1	12,5 x 8 x 3,5
2	12,5 x 8 x 4,5
3	12,5 x 8 x 5
4	12,5 x 8 x 6

* Up to 85 °C, from 85 to 125 °C this value is 25 V.

** Available to special order.

APPLICATION

Especially for filtering, smoothing, coupling and decoupling purposes in general and industrial applications. These capacitors utilize advanced technology to achieve long life, high reliability, high stability and low temperature dependence.

The capacitors have a very low and stable leakage current, small dimensions and a fixed pitch of 5 mm.

DESCRIPTION

This capacitor is of a construction with a highly etched aluminium plate anode, aluminium oxide as a dielectric and a solid cathode. The capacitor is coated with an orange synthetic resin. The terminal wires are brought out on one side.

The capacitor is available in two styles: style 1 with short wires, style 2 with long wires of which the anode wire has a flattened area at the end.

Note: Capacitors on tape are available in the course of 1982.

MECHANICAL DATA

Dimensions in mm

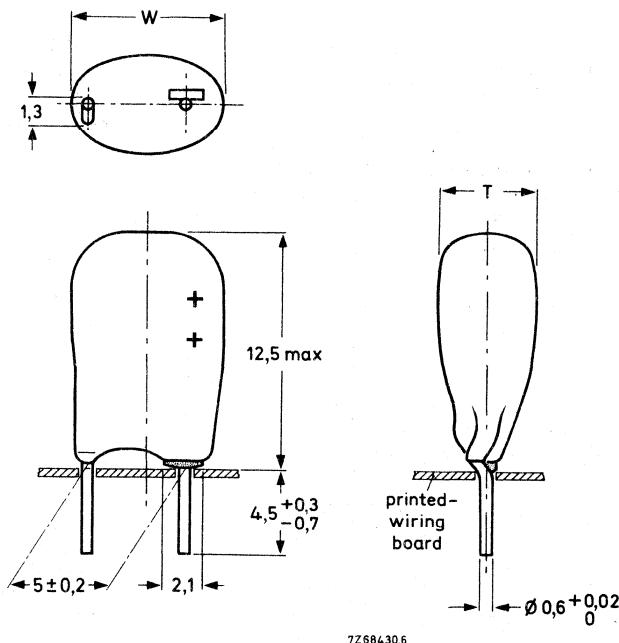


Fig. 1 Style 1; see Table 1 for dimensions T and W.

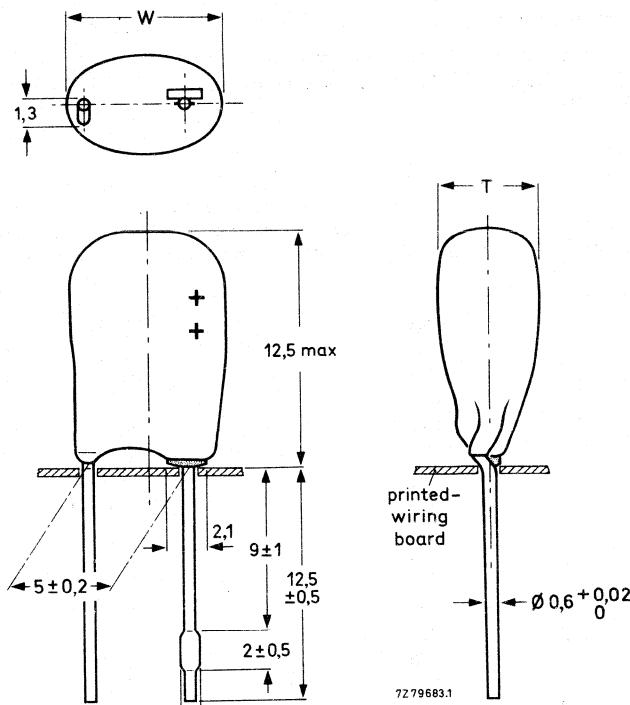


Fig. 2 Style 2; see Table 1
for dimensions T and W.

Table 1

case size	T_{max}	W_{max}
1	3,5	8
2	4,5	8
3	5	8
4	6	8

Note: A kink in the cathode wire avoids solder wetting problems of the lacquer dipped leads. The lacquer is so applied that it cannot pass beyond the centre of the kink, thus ensuring a clean surface of the part of the lead in the printed-wiring board hole. (Also suitable for use in plated-through holes).

Marking

Stamped on the capacitor are: nominal capacitance, rated voltage, "+" signs to identify the anode terminal, tolerance code ($M = \pm 20\%$, $K = \pm 10\%$), date code (year and month) and name of manufacturer.

Mounting

The diameter of the mounting holes in the printed-wiring board is $0,8 \pm 0,1$ mm, except that of the hole for the anode lead of style 2 capacitors: $1,3-0,2$ mm.

When bending, cutting or straightening the leads, ensure that the capacitor body is relieved of stress.

ELECTRICAL DATA

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 93 to 106 kPa and a relative humidity of 45 to 75%.

Table 2

U_R V	nom. cap. μF	max. r.m.s. ripple current at 1 kHz, $T_{amb} = 125$ °C mA	max. leakage current at U_R after 15 s μA^*	max. $\tan \delta$	max. impedance at 100 kHz* Ω	case size	catalogue number**
6,3	10	60	3	0,15	5	1	2222 122 .3109
	15	70	5	0,15	3	2	.3159
	22	90	7	0,15	1,3	2	.3229
	33	110	11	0,15	0,9	3	.3339
	47	140	15	0,15	0,7	4	.3479
	68	180	22	0,15	0,5	4	.3689
10	4,7	40	3	0,15	7	1	.4478
	6,8	50	4	0,15	5	1	.4688
	10	60	5	0,15	1,5	2	.4109
	15	75	8	0,15	1	2	.4159
	22	95	11	0,15	0,7	3	.4229
	33	125	17	0,15	0,5	4	.4339
16	2,2	35	2	0,10	10	1	.5228
	3,3	40	3	0,10	7	1	.5338
	4,7	50	4	0,10	2	2	.5478
	6,8	60	6	0,10	1,5	2	.5688
	10	80	8	0,10	1	3	.5109
	15	100	12	0,10	0,7	4	.5159
25	0,68	20	2	0,10	30	1	.6687
	1,0	25	2	0,10	20	1	.6108
	1,5	30	2	0,10	15	1	.6158
	2,2	35	3	0,10	10	2	.6228
	3,3	45	4	0,10	7	2	.6338
	4,7	55	6	0,10	5	3	.6478
	6,8	70	9	0,10	3	4	.6688
	10▲▲	85	13	0,10	2	4	
40▲	0,1	7,5	2	0,10	70	1	.7107
	0,15	10	2	0,10	50	1	.7157
	0,22	12,5	2	0,10	30	1	.7227
	0,33	15	2	0,10	30	1	.7337
	0,47	17,5	2	0,10	20	2	.7477
	0,68	20	2	0,10	15	2	.7687
	1,0	25	2	0,10	10	3	.7108
	1,5	30	3	0,10	7	4	.7158
	2,2	35	5	0,10	5	4	.7228
	3,3▲▲	45	7	0,10	4		

* Versions with lower values of max. leakage current or max. impedance are available to special order.


** Replace dot in catalogue number by 4 for style 1, tol. ±10%; 5 for style 1, tol. ±20%; 7 for style 2, tol. ±20%.

▲ Up to 85 °C; from 85 to 125 °C this value is 25 V. ▲▲ Available to special order.

CapacitanceNominal capacitance values at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

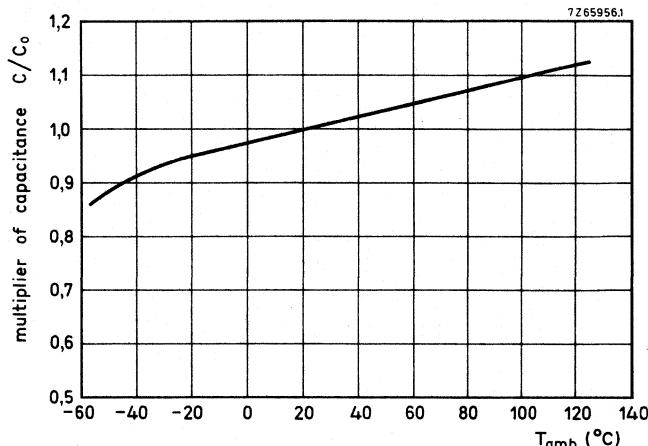 $\pm 20\% ; \pm 10\%$ Fig. 3 Typical capacitance as a function of temperature; C_0 = capacitance at 25°C , 100 Hz.**Voltage**

Rated voltage	= max permissible voltage at $\leq 125^{\circ}\text{C}$, for 6,3 to 25 V versions at $\leq 85^{\circ}\text{C}$, for 40 V version	U_R U_R
Derated voltage, for 40 V version only	= max permissible voltage at $> 85^{\circ}\text{C}$ up to $+ 125^{\circ}\text{C}$	25 V
Surge voltage	= max permissible voltage for short periods (see also Tests and requirements)	$1,15 \times U_R$
Ripple voltage *	= max permissible a.c. voltage providing the following conditions are met: a) if a.c. + d.c. voltage is applied: • max (d.c. + peak a.c.) voltage • max peak a.c. voltage b) if only a.c. voltage is applied: • max peak a.c. voltage (50 Hz)	$\leq U_R$ \leq applied d.c. voltage $+ 0,3 U_R$ $\leq 0,8 \times U_R$
Reverse voltage	= max d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods (see also Tests and requirements)	$0,30 \times U_R$

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current *

The maximum permissible r.m.s. ripple current at 1 kHz and 85 °C (I_{r0}) is given in Table 2. The values in this table are based upon the maximum permissible heat dissipation, which is the dominating limiting factor at frequencies above 1 kHz. From 1 kHz onwards the maximum permissible ripple current can be found from the formula: $I_{r\max} = \alpha \cdot I_{r0}$; α is given in Fig. 4. In this graph the curves below 1 kHz are omitted, because at these frequencies the ripple voltage (see under Voltage) is the dominating limiting factor. For frequencies below 1 kHz $I_{r\max}$ can be calculated from the formula:

$$I_{r\max} = \frac{1}{2}\pi\sqrt{2 \cdot 10^{-3}} (U_R + 0.3 U_R) \cdot f \cdot C \text{ mA},$$

in which: U_R is rated voltage in V, f is frequency in Hz, C is minimum capacitance (0,8 C_{nom}) in μF .

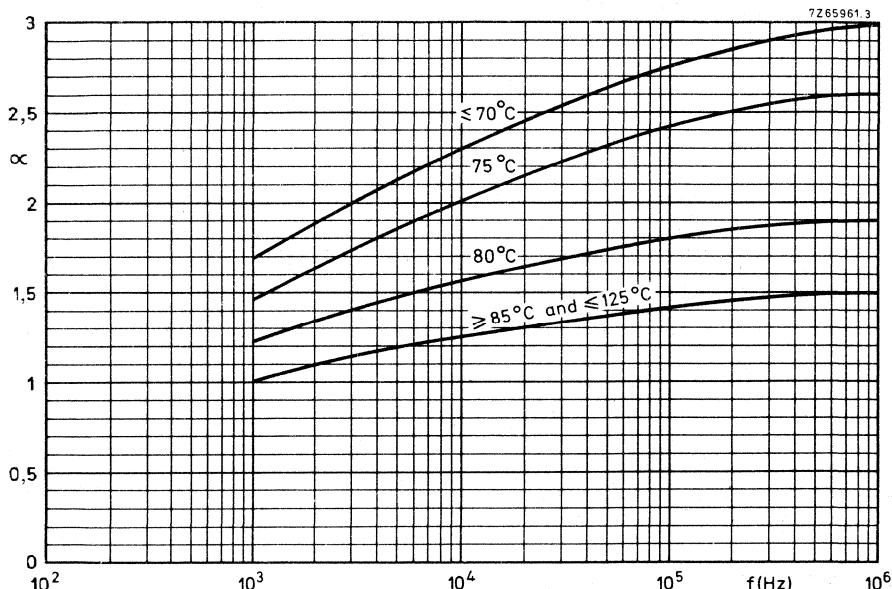


Fig. 4 Multiplying factor α as a function of frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Leakage current

Maximum leakage current 15 s after application
of the rated voltage, at $T_{amb} = 25^{\circ}\text{C}$

see Table 2 (0,05 CU or 2 μA
whichever is greater)

Leakage current during continuous operation at U_R
at 25°C
at 85°C

approx. $0,02 \times$ value stated in Table 2
approx. $0,1 \times$ value stated in Table 2

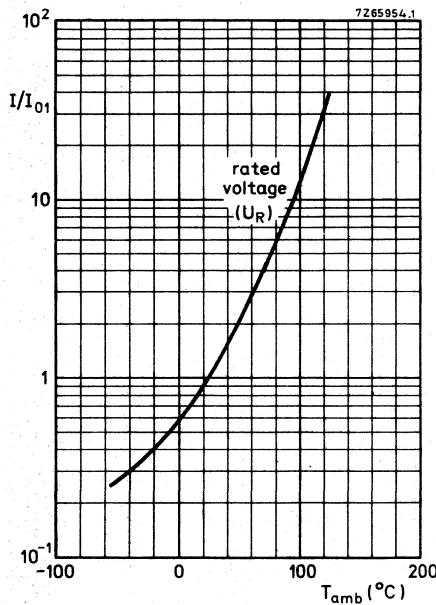


Fig. 5 Multiplier I/I_{01} as a function of temperature; I_{01} = leakage current during continuous operation at U_R , $T_{amb} = 25^{\circ}\text{C}$.

Tan δ (dissipation factor)

Maximum tan δ at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$, measured by
means of a four-terminal circuit (Thomson circuit)

see Table 2

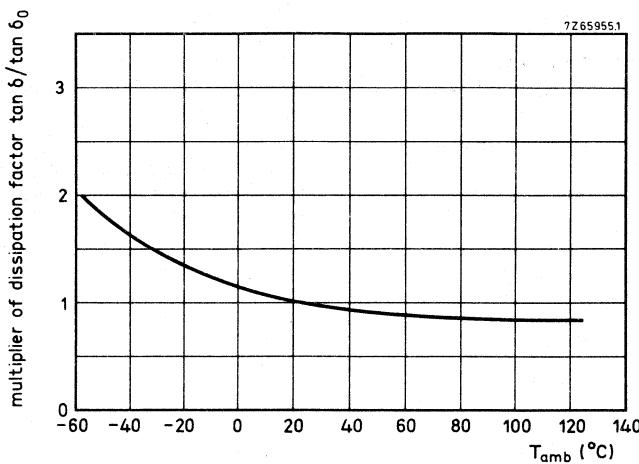


Fig. 6 Multiplier of dissipation factor as a function of temperature; $\tan \delta_0$ = dissipation factor at 25 °C, 100 Hz.

Impedance

Maximum impedance at 100 kHz and $T_{\text{amb}} = 25$ °C, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

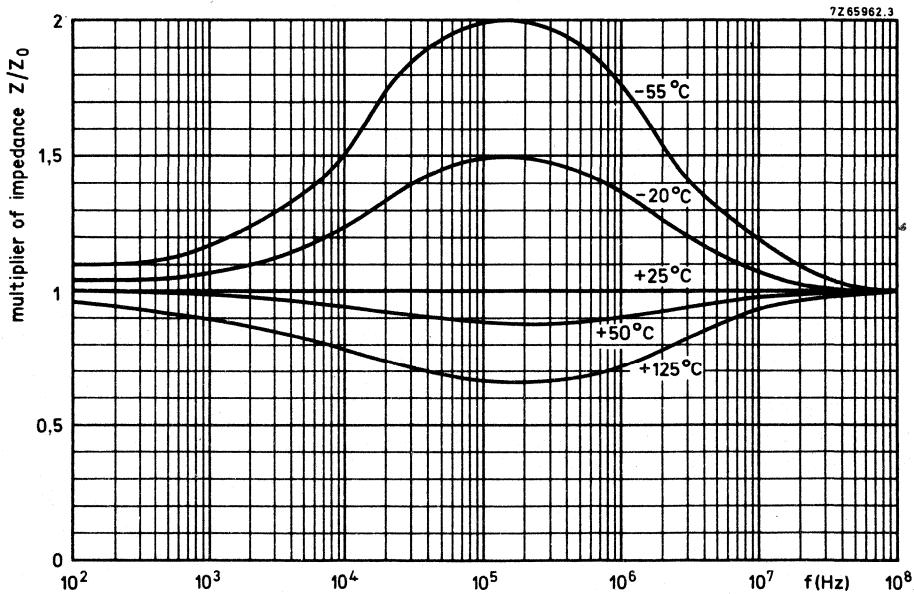


Fig. 7 Multiplier of impedance Z/Z_0 as a function of frequency at different temperatures; Z_0 = impedance initial value at 25 °C.

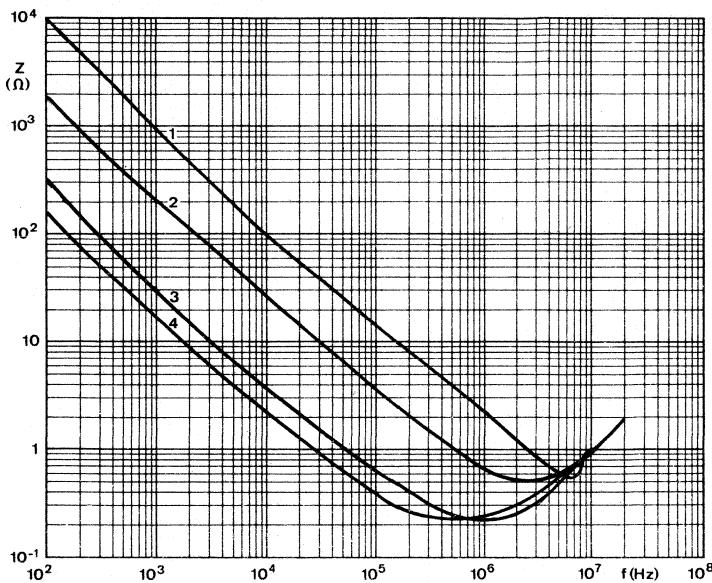


Fig. 8 Typical impedance as a function of frequency at 25 °C, case size 1. Curve 1 = 0,15 μ F, 40 V; curve 2 = 0,68 μ F, 25 V; curve 3 = 4,7 μ F, 10 V; curve 4 = 10 μ F, 6,3 V.

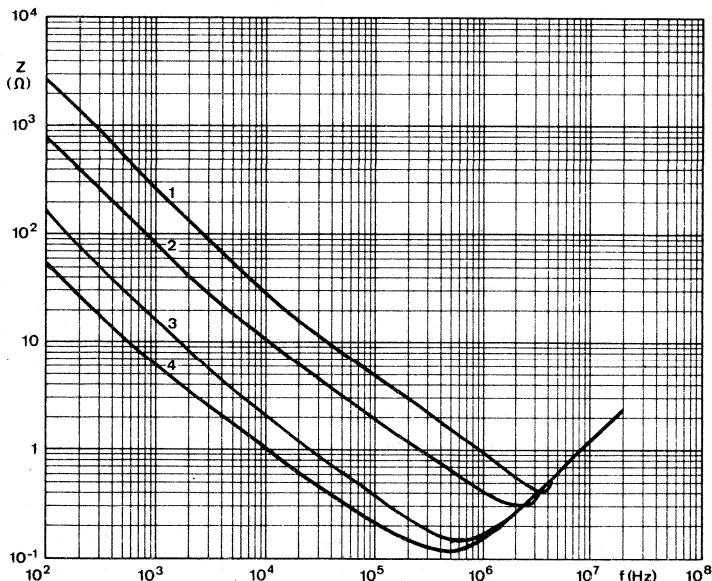


Fig. 9 Typical impedance as a function of frequency at 25 °C; case size 2. Curve 1 = 0,47 μ F, 40 V; curve 2 = 2,2 μ F, 25 V; curve 3 = 10 μ F, 10 V; curve 4 = 22 μ F, 6,3 V.

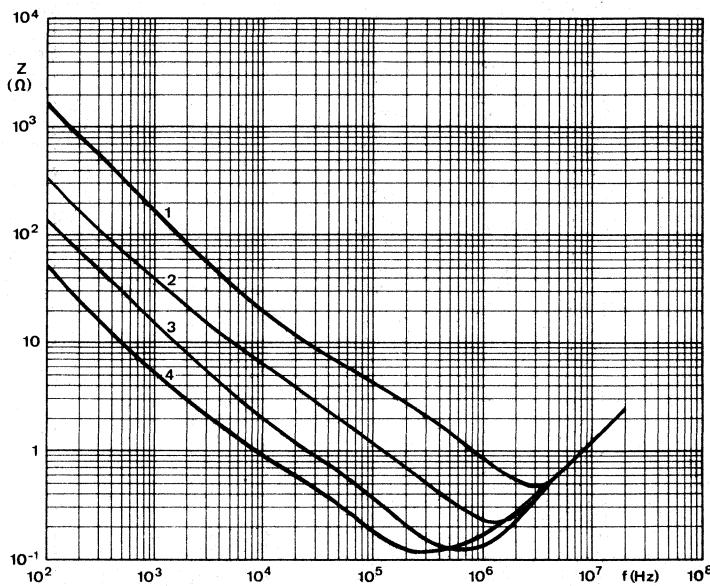


Fig. 10 Typical impedance as a function of frequency at 25 °C; case size 3. Curve 1 = 1 μF , 40 V; curve 2 = 4,7 μF , 25 V; curve 3 = 10 μF , 16 V; curve 4 = 33 μF , 6,3 V.

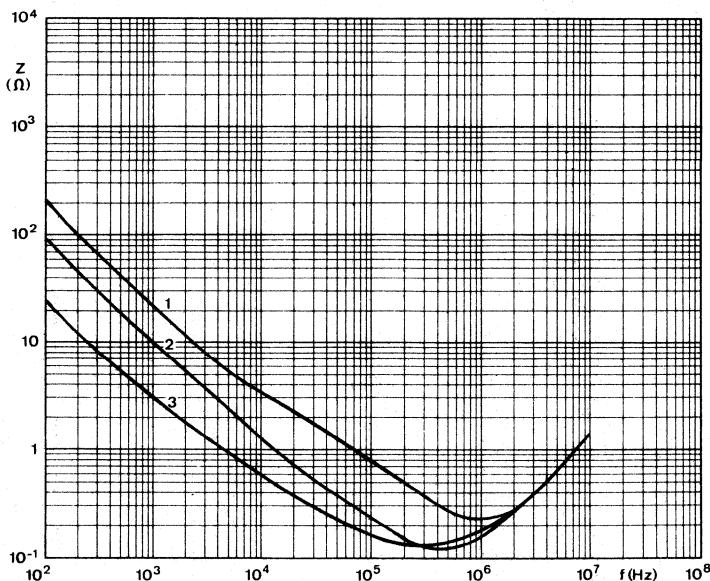


Fig. 11 Typical impedance as a function of frequency at 25 °C; case size 4. Curve 1 = 6,8 μF , 25 V; curve 2 = 15 μF , 16 V; curve 3 = 68 μF , 6,3 V.

Equivalent series resistance (ESR) at 100 Hz

$$\text{ESR} = \frac{\tan \delta}{\omega C}$$

Tan δ and C at 100 Hz

see Table 2

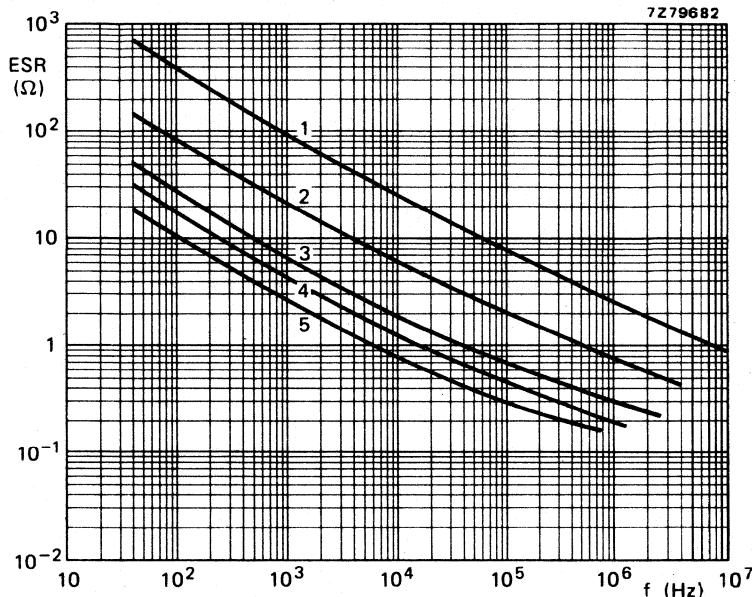


Fig. 12 Typical ESR as a function of frequency; case size 1. Curve 1 = 0,33 μF , 40 V; curve 2 = 1 μF , 25 V; curve 3 = 3,3 μF , 16 V; curve 4 = 4,7 μF , 10 V; curve 5 = 10 μF , 6,3 V.

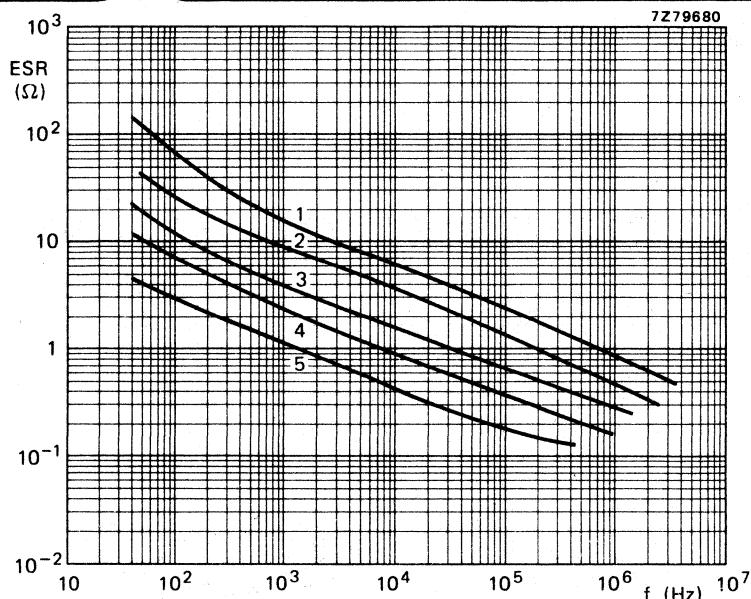


Fig. 13 Typical ESR as a function of frequency; case size 2. Curve 1 = 0,47 μ F, 40 V; curve 2 = 2,2 μ F, 25 V; curve 3 = 4,7 μ F, 16 V; curve 4 = 10 μ F, 10 V; curve 5 = 22 μ F, 6,3 V.

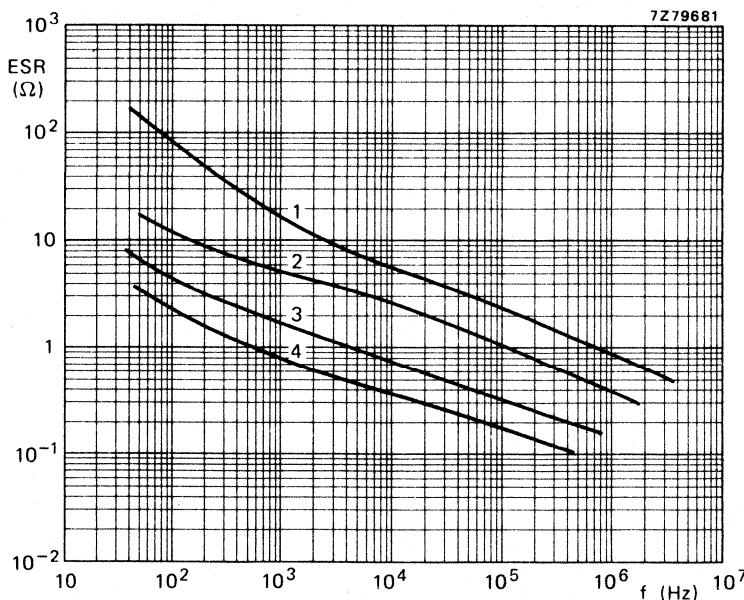


Fig. 14 Typical ESR as a function of frequency; case size 3. Curve 1 = 1 μ F, 40 V; curve 2 = 4,7 μ F, 25 V; curve 3 = 10 μ F, 16 V; curve 4 = 33 μ F, 6,3 V.

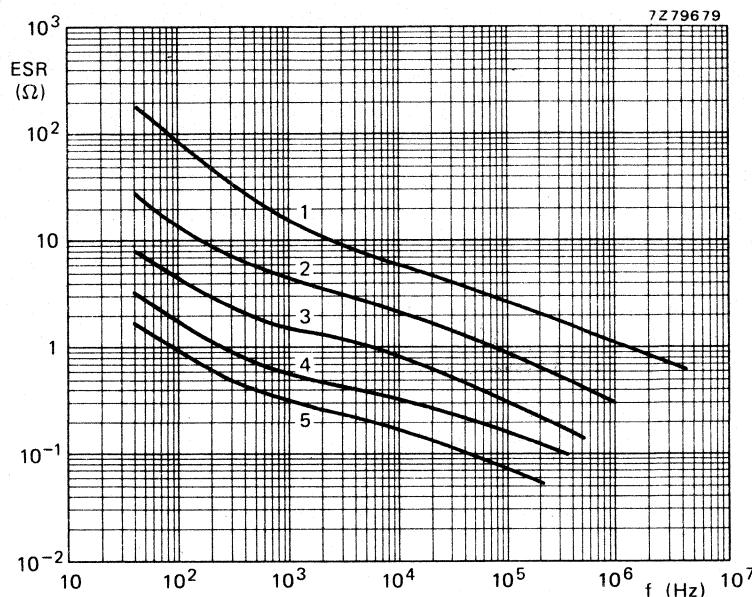


Fig. 15 Typical ESR as a function of frequency; case size 4. Curve 1 = $1,5 \mu\text{F}$, 40 V; curve 2 = $6,8 \mu\text{F}$, 25 V; curve 3 = $15 \mu\text{F}$, 16 V; curve 4 = $33 \mu\text{F}$, 10 V; curve 5 = $68 \mu\text{F}$, 6,3 V.

OPERATIONAL DATA

Category temperature range

for rated voltage, $U_R = 6,3$ to 25 V

-55 to +125 °C

for rated voltage, $U_R = 40$ V

-55 to +85 °C

for derated voltage, $U_R = 40$ V

-55 to +125 °C

Life expectancy

at 85 °C

> 20 000 hours

at 125 °C

> 10 000 hours

PACKING

1000 pieces per box: 200 pieces per plastic bag, 5 bags per box.



TESTS AND REQUIREMENTS

See Introduction, section 9, under solid aluminium capacitors, with the addition of the following solvent resistance tests.

Conditions: immersion time of samples 5 min., at ambient temperature, at boiling temperature, in vapour of boiling solvent, and ultrasonic (40 kHz).

Solvents: — deionized water ($50 \pm 5^\circ\text{C}$);

— Calgonite solution (20 g/l, $70 \pm 5^\circ\text{C}$);

— mixture of 4,5% butylcellosolve, 4,5% mono-ethanolamine, and 91% water ($70 \pm 5^\circ\text{C}$);

— I.I.I. trichloro-ethane;

— Arkalone K*;

— Freon TMC**;

— Freon TE**;

— Freon TMS**.

→ Requirement: visual appearance not affected.


NOTE: After no-load tests leakage current measurements are done after 1 min.

* Trade mark of I.C.I.

** Trade mark of Dupont de Nemours.

SOLID ALUMINIUM CAPACITORS

- Enhanced capacitance
- Small type
- Axial leads; metal case
- Long life
- High reliability
- Industrial and military applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	2,2 to 680 μF (1000 μF available to special order)
Tolerance on nominal capacitance	$\pm 10\%$ and $\pm 20\%$
Rated voltage range, U_R (R5 series)	6,3 to 40 V
Category temperature range	-55 to +125 °C
Endurance test at 125 °C	2000 h
Basic specification	IEC 384-4, long-life grade
Climatic category, IEC 68	55/125/56

Selection chart for C_{nom} , U_R and relevant case sizes.

C_{nom} μF	U_R (V)				
	6,3	10	16	25	40
2,2					1
3,3					1
4,7					1
6,8					1
10			1	1	2
15			1		2
22			1	2	3
33		1	2	3	4
47	1	2	3	3	4
68		2	3	4	5
100	2	3	4	5	6
150	3	4	5	6	
220		4	6		
330	4	5			
470	5	6			
680	6				
1000*	6				

nominal dimensions (mm)		
1	\varnothing	6,5 x 17
2	\varnothing	6,5 x 22
3	\varnothing	8 x 22
4	\varnothing	10 x 22
5	\varnothing	10 x 31
6	\varnothing	12,5 x 31

* Available to special order.

APPLICATION

These capacitors with high CU-product per unit volume, utilize advanced technology to achieve long life, high stability, excellent reliability, high ripple current rating and low temperature dependence. The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

DESCRIPTION

The capacitor has etched aluminium foil electrodes separated by a layer of semiconductive material. The electrolyte is pyrolytically formed manganese dioxide. The capacitor is housed in an aluminium case with axial leads and is sealed by a ceramic disc. The cathode lead is welded to the case, which is insulated with a blue transparent plastic sleeve.

Note: Special versions are available, which withstand severe shock tests (10 000g, 0,1 ms) and vibration tests (50g or 7,5 mm, 10 to 2000 Hz).

MECHANICAL DATA

Dimensions in mm

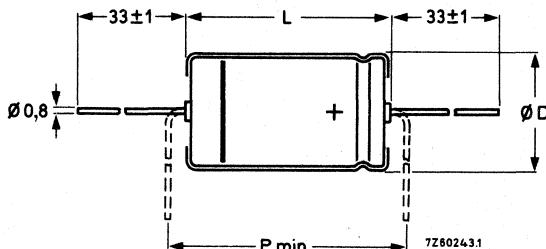


Fig. 1 For dimensions D, L and P, see Table 1.

Table 1

case size	D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	mass approx. g
1	6,5	17	6,7	17,5	20	1,2
2	6,5	22	6,7	23	25	1,6
3	8	22	8,3	23	25	2,4
4	10	22	10,3	23	25	3,3
5	10	31	10,3	32	35	4,5
6	12,5	31	12,9	32	35	6,3

Marking

Stamped on the case are: catalogue number, capacitance, rated voltage, date code, a band to identify the negative terminal and “+” signs for the positive terminal.

Mounting

No special provisions are required for soldering to the tinned leads.
(2 mm of the anode lead nearest the body are not solderable.)

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nom. cap.	max. r.m.s. ripple current at $T_{amb} = 125\text{ }^{\circ}\text{C}$ mA	max. leakage current at U_R after 1 min (μA)	max. tan δ	max. impedance at 100 kHz Ω	case size	catalogue number*
V	μF						
6,3	47	75	25	0,18	2,5	1	2222 123 . 3479
	100	125	65	0,18	1,2	2	101
	150	170	70	0,18	0,8	3	151
	330	330	150	0,18	0,5	4	331
	470	400	300	0,18	0,4	5	471
	680	500	450	0,25	0,4	6	681
	1000**	600	650	0,25	0,4	6	102
10	33	70	30	0,16	2,5	1	. 4339
	47	90	45	0,16	1,2	2	479
	68	110	70	0,16	1,2	2	689
	100	145	80	0,16	0,8	3	101
	150	220	150	0,16	0,5	4	151
	220	290	200	0,16	0,5	4	221
	330	350	330	0,16	0,4	5	331
	470	450	450	0,16	0,4	6	471
16	10	35	16	0,14	2,5	1	. 5109
	15	50	24	0,14	2,5	1	159
	22	60	35	0,14	2,5	1	229
	33	100	55	0,14	1,2	2	339
	47	110	75	0,14	0,8	3	479
	68	150	110	0,14	0,8	3	689
	100	205	160	0,14	0,5	4	101
	150	250	240	0,14	0,4	5	151
	220	330	350	0,14	0,4	6	221
	25	40	25	0,14	5	1	. 6109
25	22	70	55	0,14	2,5	2	229
	33	90	85	0,14	1,5	3	339
	47	130	120	0,14	1,5	3	479
	68	170	170	0,14	0,8	4	689
	100	200	250	0,14	0,8	5	101
	150	270	400	0,14	0,5	6	151

* Replace dot in catalogue number by:
 1 for tolerance $\pm 20\%$;
 2 for tolerance $\pm 10\%$;
 3 for versions which withstand severe shocks and vibrations; tolerance $\pm 20\%$.

** Available to special order.

Table 2 (continued)

U_R	nom. cap.	max. r.m.s. ripple current at $T_{amb} = 125^\circ C$	max. leakage current at U_R after 1 min (μA)	max. $\tan \delta$	max. impedance at 100 kHz	case size	catalogue number*
V	μF	mA			Ω		
40	2,2	20	9	0,12	5	1	2222 123 . 7228
	3,3	25	13	0,12	5	1	338
	4,7	35	19	0,12	5	1	478
	6,8	40	27	0,12	5	1	688
	10	55	40	0,12	2,5	2	109
	15	65	60	0,12	2,5	2	159
	22	90	90	0,12	1,5	3	229
	33	125	130	0,12	0,8	4	339
	47	155	190	0,12	0,8	4	479
	68	200	270	0,12	0,8	5	689
	100	240	400	0,12	0,5	6	101

* Replace dot in catalogue number by:

1 for tolerance $\pm 20\%$;

2 for tolerance $\pm 10\%$;

3 for versions which withstand severe shocks and vibrations; tolerance $\pm 20\%$.

Capacitance

Nominal capacitance values at 100 Hz
and $T_{amb} = 20^\circ C$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 10\%$ and $\pm 20\%$

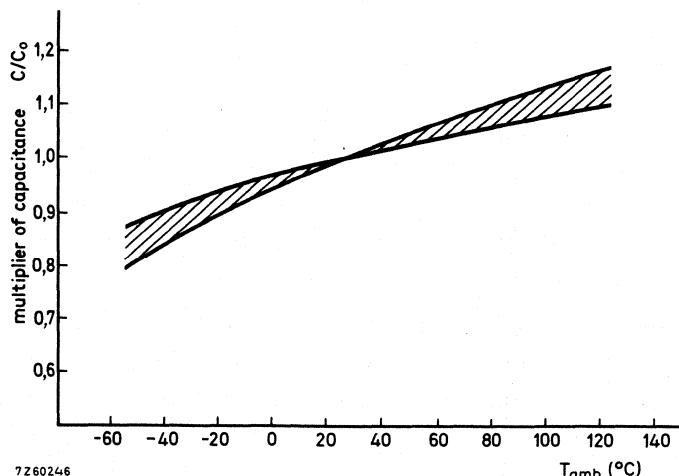


Fig. 2 Typical capacitance as a function of ambient temperature.
 C_0 = capacitance at $25^\circ C$, 100 Hz.

Voltage

Rated voltage	= max. permissible voltage	U_R
Ripple voltage*	= max. permissible a.c. voltage providing the following two conditions are met: a) max. (d.c. + peak a.c.) voltage b) max. peak a.c. voltage, 50 Hz without d.c. voltage applied	$\leq U_R$ $0,8 \times U_R$
Surge voltage	= max. permissible voltage for short periods (see also "Tests and requirements")	$1,15 \times U_R$
Reverse voltage	= max. d.c. voltage continuously (2000 h) applied in the reverse polarity at the maximum category temperature at $\leq 85^\circ C$ at $> 85^\circ C$ up to $125^\circ C$	$0,30 \times U_R$ $0,15 \times U_R$

Ripple current**

Maximum permissible r.m.s. ripple current at 100 Hz and $T_{amb} = 125^\circ C$ see Table 2

The maximum permissible ripple current ($I_{r\max}$) is a function of temperature and frequency:

$$I_{r\max} = I_{r0}\sqrt{kr}$$

where I_{r0} = max. ripple current at 100 Hz up to $125^\circ C$, see Table 2

k = temperature derating factor = P_{max}/P_0

r = frequency dependent derating factor = R_{s0}/R_s

while P_{max} = max. permissible power dissipation, temperature dependent

P_0 = max. permissible power dissipation up to $125^\circ C = (I_{r0})^2 R_{s0}$

R_{s0} = series resistance at 100 Hz = $\frac{\tan \delta}{628C}$, C and tan δ to be read from Table 2

R_s = series resistance, frequency dependent (temperature dependence neglected).

The formula is derived as follows:

$$(I_{r\max})^2 = P_{max}/R_s = k(I_{r0})^2 R_{s0}/R_s;$$

$$\text{thus } I_{r\max} = I_{r0}\sqrt{kr} \text{ (see Table 2 and Fig. 3)}$$

Leakage current

Maximum leakage current 1 min after application of
the rated voltage

see Table 2

Typical leakage current 1 min after application of
the rated voltage

0,15 of the value stated in Table 2

Leakage current during continuous operation at U_R ,
at $25^\circ C$
at $125^\circ C$

approx. $0,1 \times$ of value stated in Table 2

approx. $5 \times$ of value stated in Table 2

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

** Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

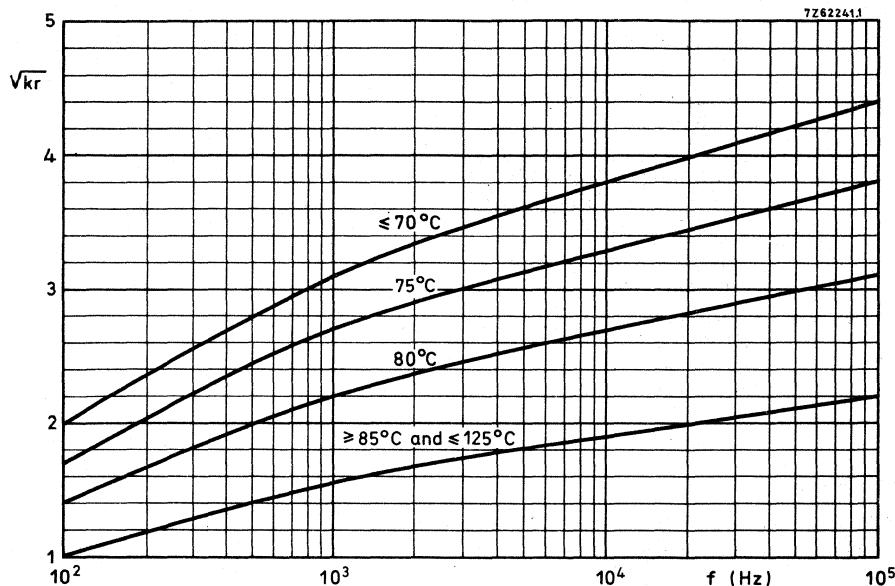


Fig. 3 Factor \sqrt{kr} as a function of frequency for calculation of maximum ripple current.

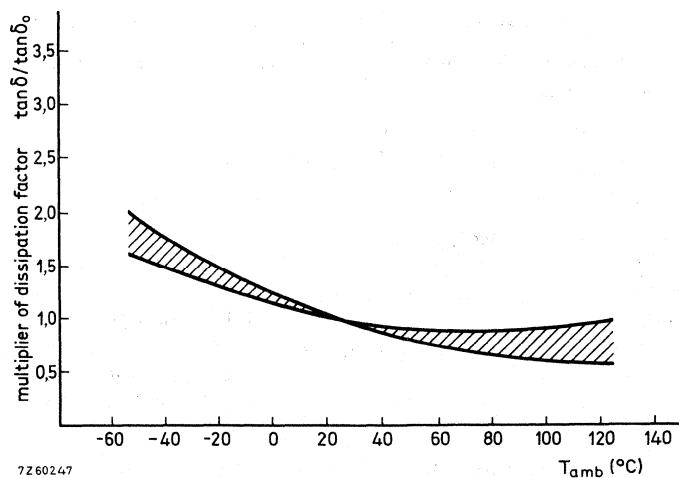


Fig. 4 Typical dissipation factor as a function of ambient temperature;
 $\tan \delta_0$ = dissipation factor at 25°C , 100 Hz.

Tan δ (dissipation factor)

Tan δ at 100 Hz, measured by means of a four-terminal circuit (Thomson circuit) (max. values)

see Table 2

Impedance

Impedance at 100 kHz, measured by means of a four-terminal circuit (Thomson circuit) (max. values)

see Table 2

Typical impedance at 100 kHz

0,5 of the stated limits in Table 2

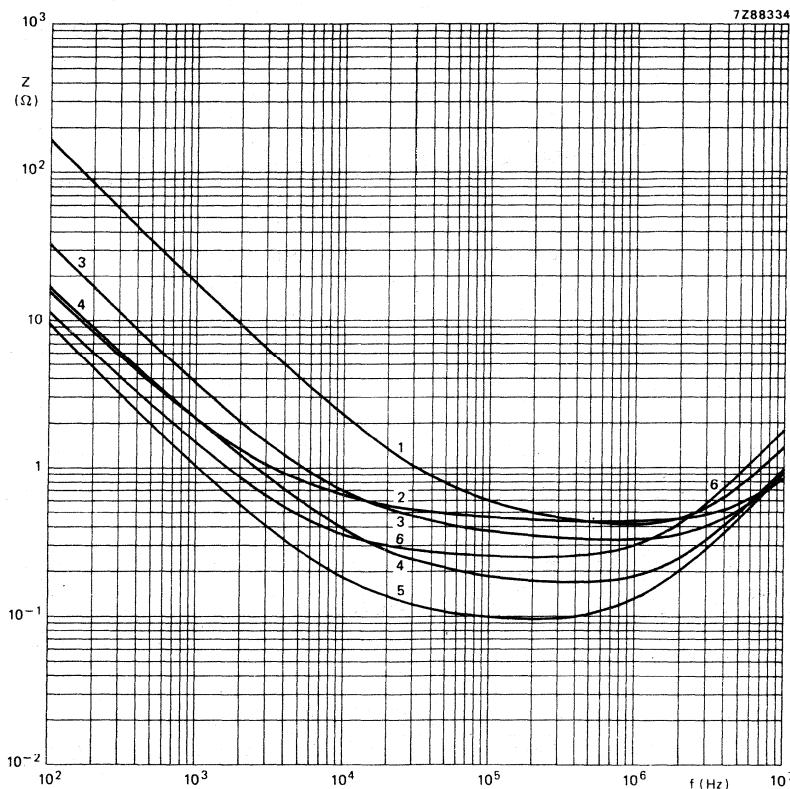


Fig. 5 Typical impedance as a function of frequency at 25 °C.

curve 1 = case size 1, 10 μ F, 16 V;

curve 4 = case size 4, 100 μ F, 16 V;

curve 2 = case size 2, 100 μ F, 6,3 V;

curve 5 = case size 5, 150 μ F, 16 V;

curve 3 = case size 3, 47 μ F, 16 V;

curve 6 = case size 6, 150 μ F, 25 V.

Equivalent series resistance (ESR)

$$\text{ESR} = \frac{\tan \delta}{\omega C}$$

Tan δ and C at 100 Hz

see Table 2

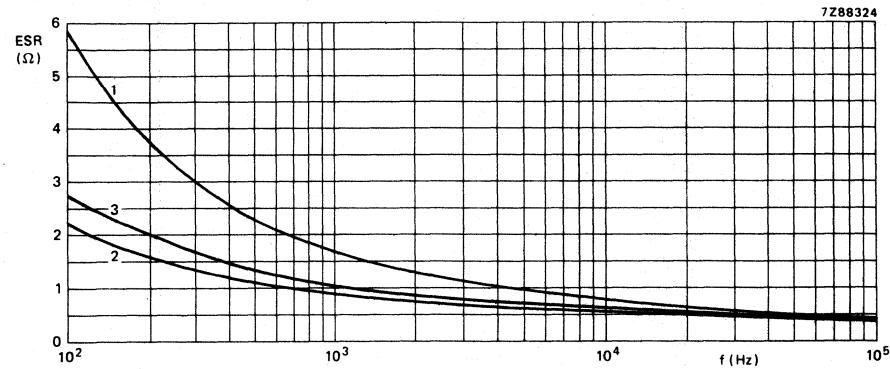


Fig. 6 Typical ESR as a function of frequency at 25 °C.

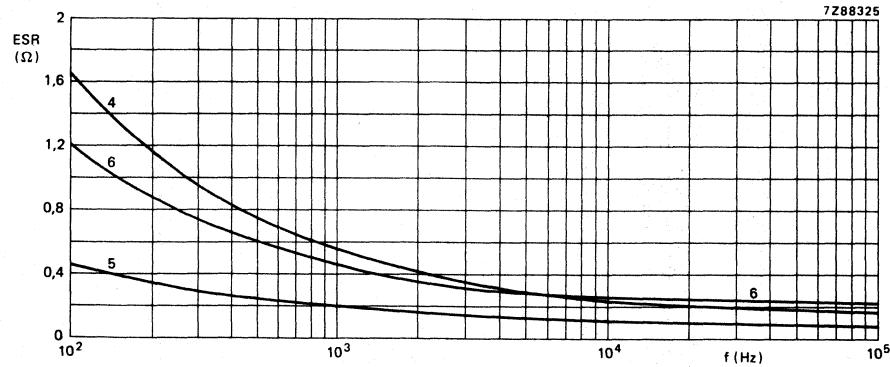
curve 1 = case size 1, 10 μF , 16 V; curve 2 = case size 2, 100 μF , 6,3 V; curve 3 = case size 3, 47 μF , 16 V.

Fig. 7 Typical ESR as a function of frequency at 25 °C.

curve 4 = case size 4, 100 μF , 16 V; curve 5 = case size 5, 150 μF , 16 V; curve 6 = case size 6, 150 μF , 25 V.**OPERATIONAL DATA**

Category temperature range

-55 to +125 °C

Life expectancy at 125 °C and U_R

> 20 000 hours

PACKING

100 pieces per box.

TEST AND REQUIREMENTS

See Handbook C14, Introduction, section 9, under solid aluminium capacitors.

SOLID TANTALUM CAPACITORS



SOLID TANTALUM CAPACITORS
hermetic seal tubular case, axial leads
style CSR13 according to MIL-C-39003/01; established reliability

QUICK REFERENCE DATA

Nominal capacitance range (E12 series)	0,1 to 330 μ F
Tolerance on nominal capacitance	$\pm 20\%$ and $\pm 10\%$ ($\pm 5\%$ on request)
Rated voltage range, U_R	6 to 75 V (100 V on request)
Category temperature range	
at U_R	-55 to +85 °C
at 0,67 U_R	-55 to +125 °C
Basic specification	MIL-C-39003/01, style CSR13
Climatic category, IEC68	
at U_R	55/085/56
at 0,67 U_R	55/125/56

Selection chart for C- U_R and relevant case sizes

C_{nom} μ F	U_R (V)					
	10	15	20	35	50	75
0,1				A	A	
0,12				A	A	
0,15				A	A	
0,18				A	A	
0,22				A	A	
0,27				A	A	
0,33				A	A	
0,39				A	A	
0,47				A	A	
0,56				A	A	
0,68				A	A	
0,82				A	B	
1				A	B	
1,2		A		B	B	
1,5		A		B	B	
1,8		A		B	B	
2,2		A		B	B	
2,7	A			B	B	
3,3	A			B	B	
3,9	A			B	B	
4,7	A			B	C	

C_{nom} μ F	U_R (V)						
	6	10	15	20	35	50	75
5,6	A				B	C	C
6,8	A				B	C	C
8,2			B		C	C	
10			B		C	C	
12			B		C	D	
15			B		C	D	
18		B			C	C	
22	B				C	D	
27		B			C	D	
33		B			C	D	
39		B			C	D	
47	B				C	D	
56	B		C		D		
68			C		D		
82			C		D		
100			C		D		
120			C		D		
150	C				D		
180	C	D					
220		D					
270	D						
330	D						

APPLICATION

These capacitors are designed for circuit functions such as:

- bypassing;
- coupling and decoupling;
- filtering;
- blocking;
- timing.

They are intended for use in polarized or d.c. biased circuits where the a.c. component is small compared to the d.c. rated voltage.

DESCRIPTION

The capacitors consist of a highly purified sintered tantalum anode body utilizing an electrolytically formed oxide dielectric, and a solid electrolyte, enclosed in a hermetically sealed insulated metal case with axial leads. Standard construction includes tin-lead plated leads.

MECHANICAL DATA

Dimensions in mm (including insulation)

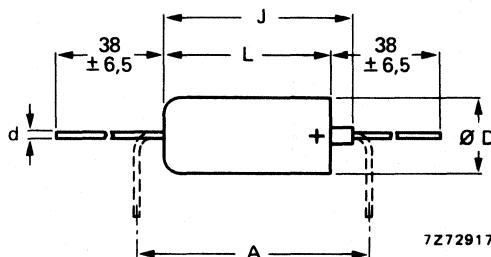


Fig.1.

Table 1

case size	A	D	L	J _{max}	d	approx. mass g
A	12,7	3,43	7,26	10,72	0,51	0,7
B	17,8	4,70	12,04	15,49	0,51	1,6
C	25,4	7,34	17,42	20,88	0,64	4,9
D	27,9	8,92	19,96	23,42	0,64	8,8

Marking

The capacitors are marked as follows:

- 1st line, all case sizes : military specification number;
- 2nd line, case sizes A and B : specification sheet number and trade mark;
- 2nd line, case sizes C and D : specification sheet number, dash number and J (for JAN) *;
- 3rd line, case sizes A and B : dash number and J (for JAN) *;
- 3rd line, case sizes C and D : polarity, date code (year and week) and lot code;
- 4th line, case sizes A and B : polarity, date code (year and week) and lot code;
- 4th line, case sizes C and D : polarity and nominal capacitance;
- 5th line, case size B : source code number of manufacturer;
- 5th line, case sizes C and D : tolerance on nominal capacitance and rated voltage;
- 6th line, case size B : nominal capacitance, tolerance on nominal capacitance and rated voltage;
- 6th line, case sizes C and D : source code number of manufacturer.

Marking examples of capacitors with different case sizes:

<u>case size A</u>	<u>case size B</u>	<u>case size C and D</u>
39003	M 39003	M 39003/
01-N	01-N	01-2261 J
2001 J	2246 J	+ 7626 C
+ 7626 A	+ 7626 B	+ 100 μ F
	26769	10% 10 V
	56 K 6 V **	26769

* Not for failure rate level L.

** K = $\pm 10\%$, M = $\pm 20\%$, J = $\pm 5\%$.

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values apply at an ambient temperature of 20 to 25°C, a frequency of 100 Hz, an atmospheric pressure of 860 to 1060 mbar and a relative humidity of 45 to 75%. Notes are at the end of the table.

MIL type designation (note 1)	UR	nom. cap. cap. tol.	μF	%	max. leakage current at UR after 5 min (μA) at			tan δ (%) at			case size	cat. no. 2222 141 for failure rate level (% per 1000 h) (note 2)			
					+25 °C	+85 °C	+125 °C	-55 °C +25 °C	+85 °C +125 °C	2,0 L		1,0 M	0,1 P	0,01 R	0,001 S
CSR13B565K	6	5,6	10	0,3	6	7,5	4	4	4	A	20011	22411	24811	27211	29611
CSR13B685K	6	6,8	10	0,3	6	7,5	6	6	6	A	20021	22421	24821	27221	29621
CSR13B685M	6	6,8	20	0,3	6	7,5	6	6	6	A	20031	22431	24831	27231	29631
CSR13B476K	6	47	10	1,5	24	30	6	6	6	B	20042	22442	24842	27242	29642
CSR13B476M	6	47	20	1,5	24	30	6	6	6	B	20052	22452	24852	27252	29652
CSR13B566K	6	56	10	1,5	24	30	6	6	6	B	20062	22462	24862	27262	29662
CSR13B157K	6	150	10	4,5	90	113	8	8	8	C	20073	22473	24873	27273	29673
CSR13B157M	6	150	20	4,5	90	113	8	8	8	C	20083	22483	24883	27283	29683
CSR13B187K	6	180	10	5,5	110	138	8	8	8	C	20093	22493	24893	27293	29693
CSR13B277K	6	270	10	6,5	130	163	8	8	8	D	20104	22504	24904	27304	29704
CSR13B337K	6	330	10	7,5	150	188	8	8	8	D	20114	22514	24914	27314	29714
CSR13B337M	6	330	20	7,5	150	188	8	8	8	D	20124	22524	24924	27324	29724
CSR13C395K	10	3,9	10	0,3	6	7,5	4	4	4	A	20131	22531	24931	27331	29731
CSR13C475K	10	4,7	10	0,4	7	8,6	4	4	4	A	20141	22541	24941	27341	29741
CSR13C475M	10	4,7	20	0,4	7	8,8	4	4	4	A	20151	22551	24951	27351	29751
CSR13C276K	10	27	10	2	40	50	6	6	6	B	20162	22562	24962	27362	29762
CSR13C336K	10	33	10	2,5	50	63	6	6	6	B	20172	22572	24972	27372	29772
CSR13C336M	10	33	20	2,5	50	63	6	6	6	B	20182	22582	24982	27382	29782
CSR13C396K	10	39	10	2,5	50	63	6	6	6	B	20192	22592	24992	27392	29792
CSR13C826K	10	82	10	4	80	100	6	6	6	C	20203	22603	25003	27403	29803
CSR13C107K	10	100	10	5	100	125	8	8	8	C	20213	22613	25013	27413	29813
CSR13C107M	10	100	20	5	100	125	8	8	8	C	20223	22623	25023	27423	29823
CSR13C127K	10	120	10	6	120	150	8	8	8	C	20233	22633	25033	27433	29833
CSR13C187K	10	180	10	9	180	226	8	8	8	D	20244	22644	25044	27444	29844

Table 2 (continued)

MIL type designation (note 1)	U _R	nom. cap. cap. tol.	% μF	max. leakage current at U _R after 5 min (μA) at			tan δ (%) at		case size	cat. no. 2222 14 1 for failure rate level (% per 1000 h) (note 2)		
				+25 °C	+85 °C	+125 °C	-55 °C +25 °C	+85 °C +125 °C		2,0 L	1,0 M	0,1 P
CSR13E107K	20	100	10	10	200	250	8	8	D	20614	23014	25414
CSR13E107M	20	100	20	10	200	250	8	8	D	20624	23024	25424
CSR13F565K	35	5,6	10	1,3	25	32	4	4	B	20632	23032	25432
CSR13F685K	35	6,8	10	1,5	30	38	6	6	B	20642	23042	25442
CSR13F685M	35	6,8	20	1,5	30	38	6	6	B	20652	23052	25452
CSR13F226K	35	22	10	4	80	100	6	6	C	20663	23063	25463
CSR13F226M	35	22	20	4	80	100	6	6	C	20673	23073	25473
CSR13F276K	35	27	10	4,5	90	113	6	6	D	20684	23084	25484
CSR13F336K	35	33	10	5,5	110	138	6	6	D	20694	23094	25494
CSR13F336M	35	33	20	5,5	110	138	6	6	D	20704	23104	25504
CSR13F396K	35	39	10	7	140	175	6	6	D	20714	23114	25514
CSR13F476K	35	47	10	8	160	200	6	6	D	20724	23124	25524
CSR13F476M	35	47	20	8	160	200	6	6	D	20734	23134	25534
CSR13G104K	50	0,1	10	0,3	5	6,3	2	4	A	20981	23381	25781
CSR13G104M	50	0,1	20	0,3	5	6,3	2	4	A	20991	23391	25791
CSR13G124K	50	0,12	10	0,3	5	6,3	2	4	A	21001	23401	25801
CSR13G154K	50	0,15	10	0,3	5	6,3	2	4	A	21011	23411	25811
CSR13G154M	50	0,15	20	0,3	5	6,3	2	4	A	21021	23421	25821
CSR13G184K	50	0,18	10	0,3	5	6,3	2	4	A	21031	23431	25831
CSR13G224K	50	0,22	10	0,3	5	6,3	2	4	A	21041	23441	25841
CSR13G224M	50	0,22	20	0,3	5	6,3	2	4	A	21051	23451	25851
CSR13G274K	50	0,27	10	0,3	5	6,3	2	4	A	21061	23461	25861
CSR13G334K	50	0,33	10	0,3	5	6,3	2	4	A	21071	23471	25871
CSR13G334M	50	0,33	20	0,3	5	6,3	2	4	A	21081	23481	25881
CSR13G394K	50	0,39	10	0,3	5	6,3	2	4	A	21091	23491	25891
CSR13G474K	50	0,47	10	0,3	5	6,3	2	4	A	21101	23501	25901
CSR13G474M	50	0,47	20	0,3	5	6,3	2	4	A	21111	23511	25911
CSR13G564K	50	0,56	10	0,3	5	6,3	2	4	A	21121	23521	25921

Table 2 (continued)

MIL type designation (note 1)	U _R	nom. cap. tol.	V	μF	max. leakage current at U _R after 5 min (μA) at			tan δ (%) at		case size	cat. no. 22222 14-1 for failure rate level (% per 1000 h) (note 2)				
					+25 °C	+85 °C	+125 °C	-55 °C +25 °C	+85 °C +125 °C		2,0 L	1,0 M	0,1 P	0,01 R	0,001 S
CSR13H274K	75	0,27	10	0,3	5	6,3	2	4	4	A	21501	23901	26301	28701	31101
CSR13H334K	75	0,33	10	0,3	5	6,3	2	4	4	A	21511	23911	26311	28711	31111
CSR13H334M	75	0,33	20	0,3	5	6,3	2	4	4	A	21521	23921	26321	28721	31121
CSR13H394K	75	0,39	10	0,3	5	6,3	2	4	4	A	21531	23931	26331	28731	31131
CSR13H474K	75	0,47	10	0,3	5	6,3	2	4	4	A	21541	23941	26341	28741	31141
CSR13H474M	75	0,47	20	0,3	5	6,3	2	4	4	A	21551	23951	26351	28751	31151
CSR13H564K	75	0,56	10	0,3	5	6,3	2	4	4	A	21561	23961	26361	28761	31161
CSR13H684K	75	0,68	10	0,3	5	6,3	2	4	4	A	21571	23971	26371	28771	31171
CSR13H684M	75	0,68	20	0,3	5	6,3	2	4	4	A	21581	23981	26381	28781	31181
CSR13H824K	75	0,82	10	0,3	5	6,3	2	4	4	B	21592	23992	26392	28792	31192
CSR13H105K	75	1	10	0,3	5	6,3	2	4	4	B	21602	24002	26402	28802	32202
CSR13H105M	75	1	20	0,3	5	6,3	4	4	4	B	21612	24012	26412	28812	32122
CSR13H125K	75	1,2	10	0,3	5	6,3	4	4	4	B	21622	24022	26422	28822	32222
CSR13H155K	75	1,5	10	0,5	10	13	4	4	4	B	21632	24032	26432	28832	32322
CSR13H155M	75	1,5	20	0,5	10	13	4	4	4	B	21642	24042	26442	28842	32422
CSR13H185K	75	1,8	10	0,5	10	13	4	4	4	B	21652	24052	26452	28852	32522
CSR13H225K	75	2,2	10	0,7	10	19	4	4	4	B	21662	24062	26462	28862	32622
CSR13H225M	75	2,2	20	0,7	15	19	4	4	4	B	21672	24072	26472	28872	32722
CSR13H275K	75	2,7	10	0,7	15	19	4	4	4	B	21682	24082	26482	28882	32822
CSR13H335K	75	3,3	10	1	20	25	4	4	4	C	21692	24092	26492	28892	32922
CSR13H335M	75	3,3	20	1	20	25	4	4	4	C	21702	24102	26502	28902	33022
CSR13H395K	75	3,9	10	1	20	25	4	4	4	C	21712	24112	26512	28912	33122
CSR13H475K	75	4,7	10	3	60	75	4	4	4	C	21723	24123	26523	28923	33223
CSR13H475M	75	4,7	20	3	60	75	4	4	4	C	21733	24133	26533	28933	33323
CSR13H565K	75	5,6	10	3	60	75	4	4	4	C	21743	24143	26543	28943	33423
CSR13H685K	75	6,8	10	5	100	125	6	6	6	C	21753	24153	26553	28953	33523
CSR13H685M	75	6,8	20	5	100	125	6	6	6	C	21763	24163	26563	28963	33623
CSR13H825K	75	8,2	10	5	100	125	6	6	6	C	21773	24173	26573	28973	33723
CSR13H106K	75	10	10	5	100	125	6	6	6	C	21783	24183	26583	28983	33823

CSR13H106M	75	10	20	5	100	125	6	6	C	21793	24193	26593	28993	31393
CSR13H126K	75	12	10	5	100	125	6	6	D	21804	24204	26604	29004	31404
CSR13H156K	75	15	10	7	140	175	6	6	D	21814	24214	26614	29014	31414
CSR13H156M	75	15	20	7	140	175	6	6	D	21824	24224	26624	29024	31424

Note 1: Complete MIL type designation will include an additional symbol to indicate failure rate level; see also MIL coding system.

Note 2: Failure rate level L (2%) has been made obsolete by MIL-C-39003/1E. It is available for purchase but cannot carry a JAN marking.
 Note 3: The following capacitor versions are available on request:

UR = 75 V; 0.0047 to 0.82 μ F (E12 series), case size A;


UR = 100 V; 0.0047 to 0.56 μ F (E12 series), case size A and 0.68 to 2.7 μ F (E12 series), case size B.

On request the above-mentioned capacitance values, and all capacitance values in Table 2, are available with a tolerance of $\pm 5\%$.

Military coding system

CSR13.

style: established reliability sintered tantalum
anode solid electrolyte capacitor. Insulated
case only.



rated voltage UR

B = 6 V E = 20 V G = 50 V

C = 10 V F = 35 V H = 75 V

D = 15 V

Ordering coding system

2222 141

dash number of failure rate level
according to MIL-C-39003/1E

case size
1 = case size A
2 = case size B
3 = case size C
4 = case size D

Capacitance

The nominal capacitance values at 100 Hz are given in Table 2. The tolerance on nominal capacitance at 100 Hz is $\pm 20\%$ and $\pm 10\%$ ($\pm 5\%$ on request).

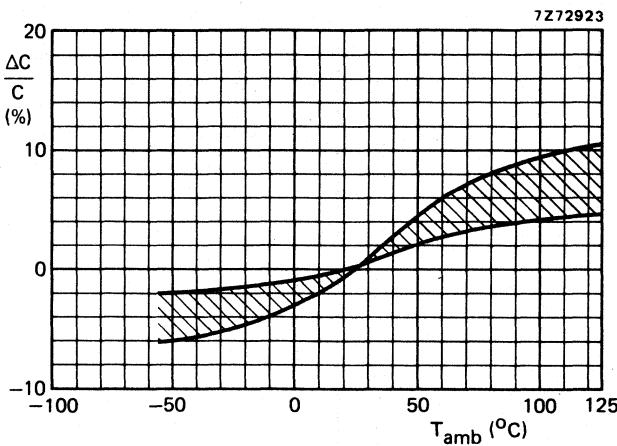


Fig.2 Typical capacitance as a function of ambient temperature.

The change in capacitance from the initial value measured at 25 °C shall not exceed the following percentages:

- 10% at -55 °C;
- 8% at +85 °C;
- 12% at +125 °C.

Voltage**Rated voltage**

The rated voltage, U_R in Table 2, is the maximum permissible voltage at -55 to $+85$ °C. The capacitors may be operated up to 125 °C by derating the rated voltage in accordance with Fig.3.

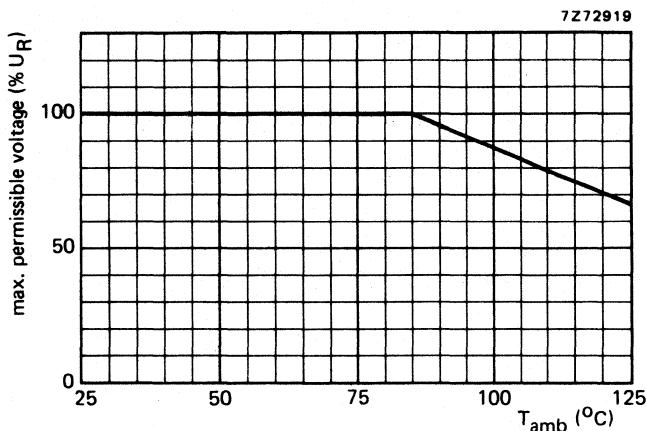


Fig.3 Maximum permissible voltage as a function of ambient temperature.

Surge voltage

The surge voltage (see Table 3) is the maximum short duration voltage which may be applied to the capacitor; i.e. turn-on transients, peak a.c. voltage, or any other voltage pulses which may be superimposed on the rated voltage. In no case may the sum of the a.c. voltage and the applied rated voltage exceed the rated d.c. surge voltage.

Table 3

U_R V	surge voltage (V)	
	at ≤ 85 °C	at 85 to 125 °C
6	8	5
10	13	9
15	20	12
20	26	16
35	46	28
50	65	40
75	97	64
100	130	86

Surge voltage test

The appropriate surge voltage shall be applied to the test capacitors via a $1000\ \Omega$ series limiting resistor for 30 s. The test capacitors shall then be discharged via the $1000\ \Omega$ resistor for 5½ min. This charge-discharge cycle shall be repeated 2000 times.

Following the surge test the following requirements must be met:

- capacitance shall not change more than $\pm 5\%$;
- dissipation factor shall meet initial requirements;
- d.c. leakage current shall meet initial requirements.

Reverse voltage

The reverse voltage is the maximum d.c. voltage applied in the reverse polarity at the maximum category temperature; its value is 0,5 V.

Ripple voltage

As in all electrical equipment the temperature rise in a capacitor must be controlled. The temperature rise is a result of the $I^2 R$ loss in the equivalent series resistance (ESR) of the capacitor when the capacitor is subjected to an a.c. ripple current. To insure safe operating conditions the sum of the applied d.c. voltage and peak a.c. voltage should not exceed the rated voltage of the capacitor.

The maximum permissible a.c. voltage (r.m.s. value) at 60 Hz and 25 °C is shown in Fig.4. For the maximum permissible a.c. voltage at other operating conditions multiply the maximum permissible a.c. voltage found in Fig.4 by the appropriate temperature derating factor from Fig.5 and frequency derating factor from Fig.6.

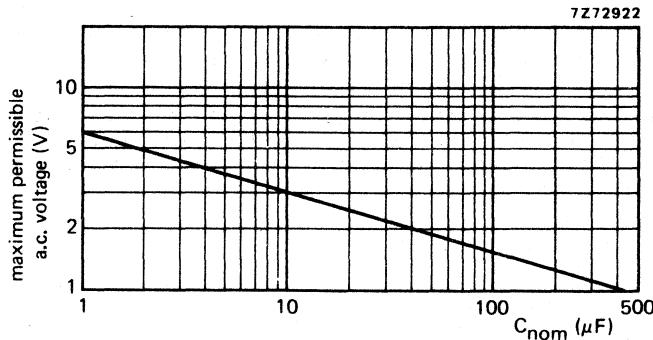


Fig.4 Maximum permissible a.c. voltage at 25 °C and 60 Hz as a function of nominal capacitance.

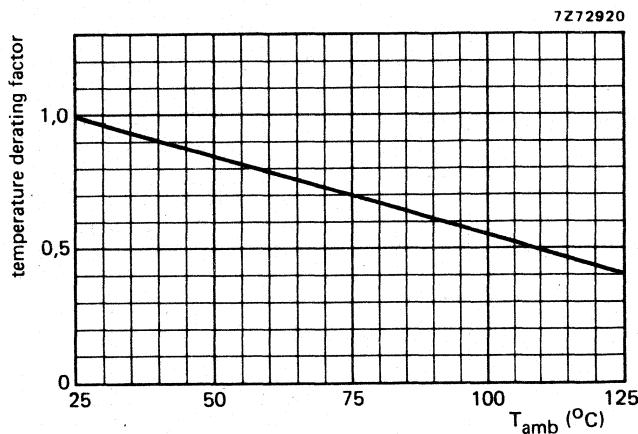


Fig.5 Effect of temperature on maximum permissible a.c. voltage.

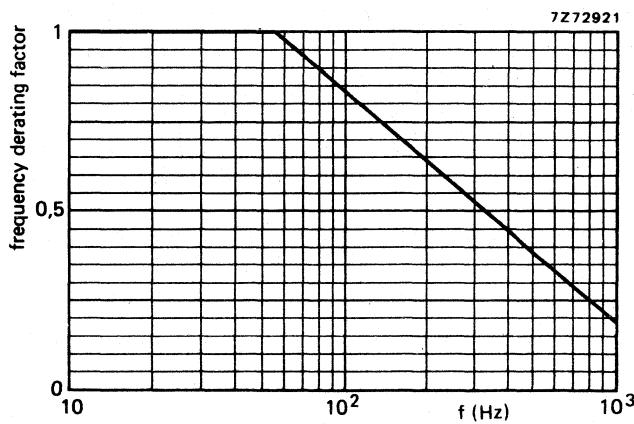


Fig.6 Effect of frequency on maximum permissible a.c. voltage.

Example

At 125 °C the maximum permissible ripple voltage of 400 Hz that can be applied to a capacitor of 10 µF is found in the following way. Fig.4 shows 2,7 V at 25 °C and 60 Hz; from Fig.5 the temperature derating factor at 125 °C is 0,4, from Fig.6 the frequency derating factor at 400 Hz is 0,45. At the stated conditions the maximum permissible ripple voltage is $2,7 \times 0,4 \times 0,45 = 0,486$ V.

Leakage current

The maximum leakage current 5 min after application of the rated voltage U_R is given in Table 2.

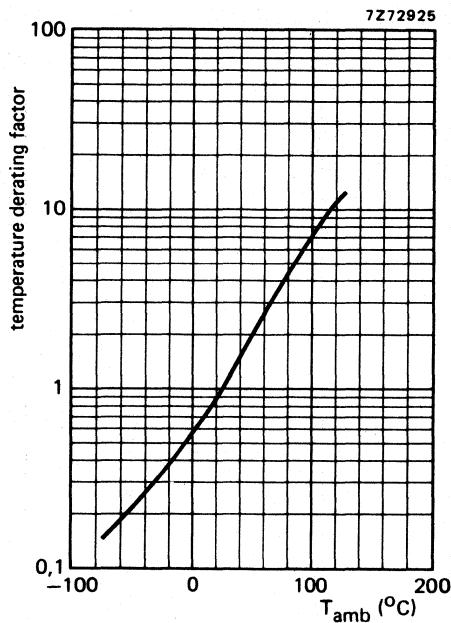


Fig.7 Typical effect of ambient temperature on leakage current.

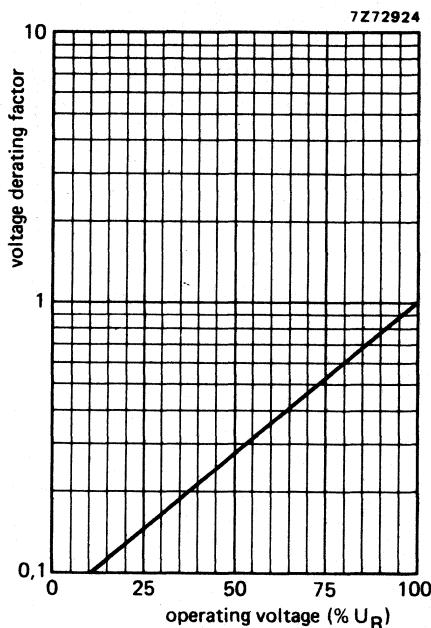


Fig.8 Typical effect of operating voltage on leakage current.

 $\tan \delta$ (dissipation factor)

$\tan \delta$ at 100 Hz at -55 to $+85$ °C, measured by means of a four-terminal circuit (Thomson circuit), is given in Table 2.

Impedance

The impedance is measured by means of a four-terminal circuit (Thomson circuit). See graphs on the following pages.

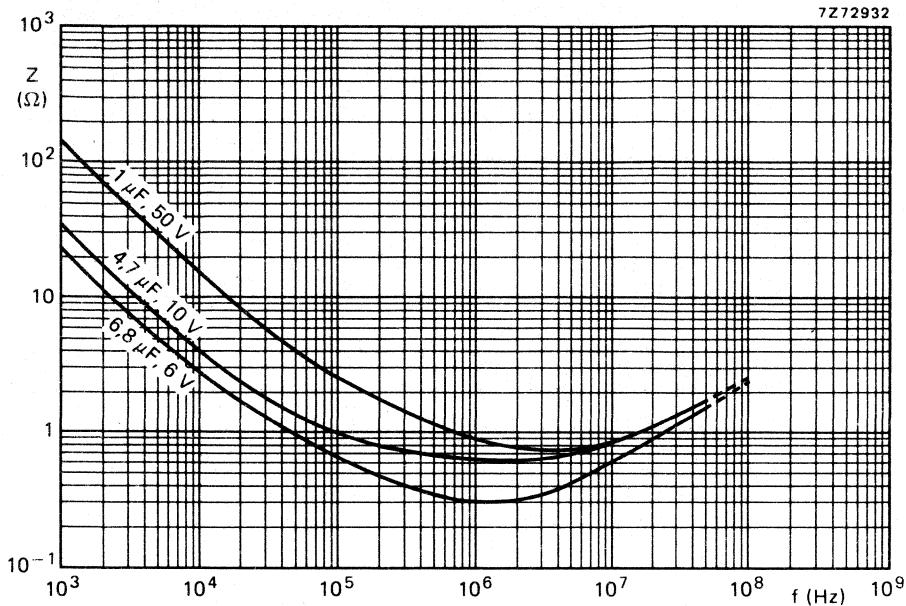


Fig.9 Typical impedance as a function of frequency at 25 °C; case size A.

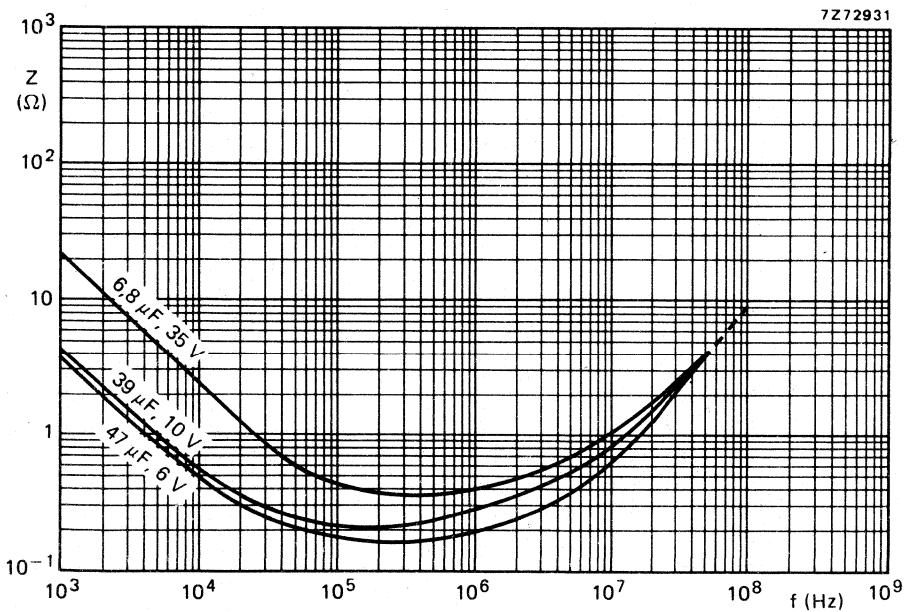


Fig.10 Typical impedance as a function of frequency at 25 °C; case size B.

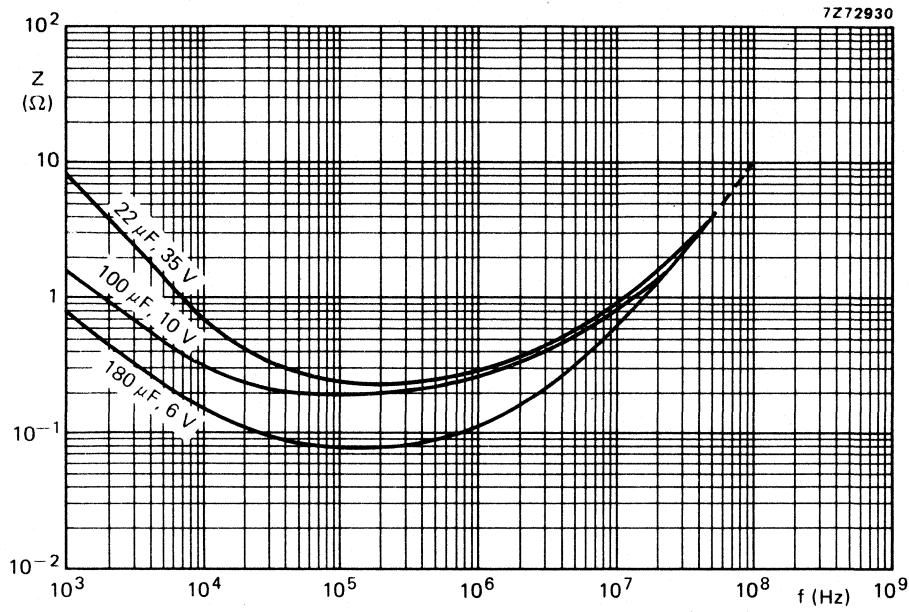


Fig.11 Typical impedance as a function of frequency at 25 °C; case size C.

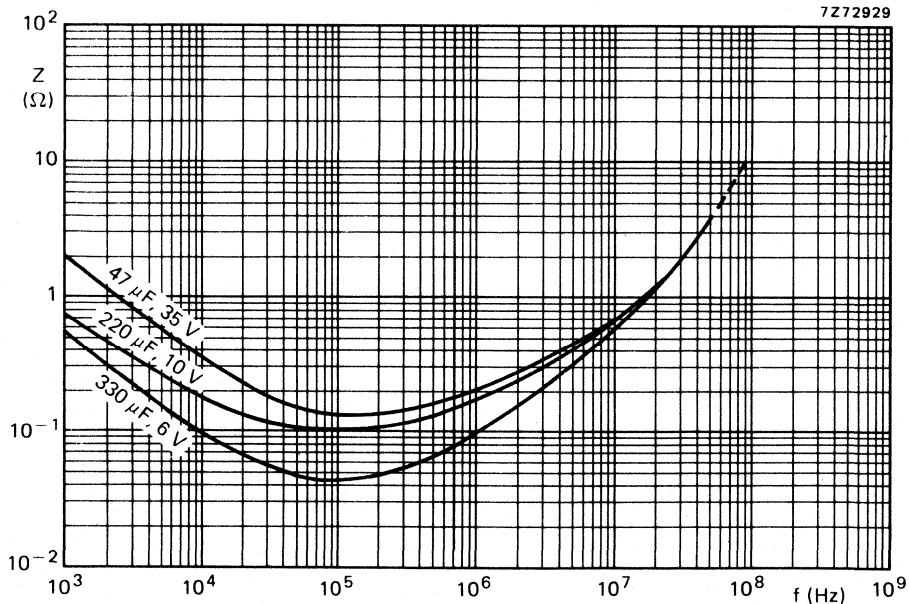


Fig.12 Typical impedance as a function of frequency at 25 °C; case size D.

Equivalent series resistance (ESR = $\tan \delta / \omega C$)Tan δ and C at 100 Hz are given in Table 2.

7Z72926

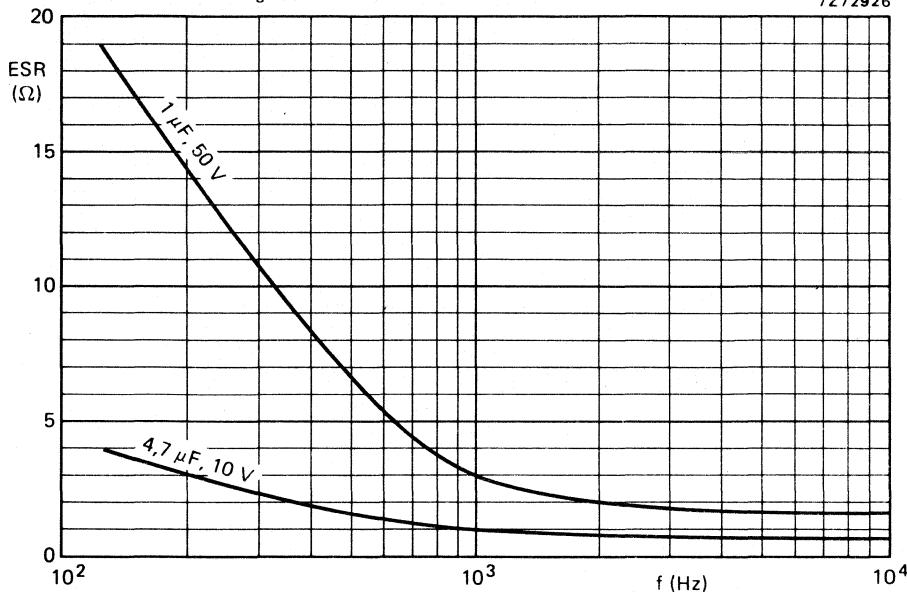


Fig.13 Typical ESR as a function of frequency; case size A.

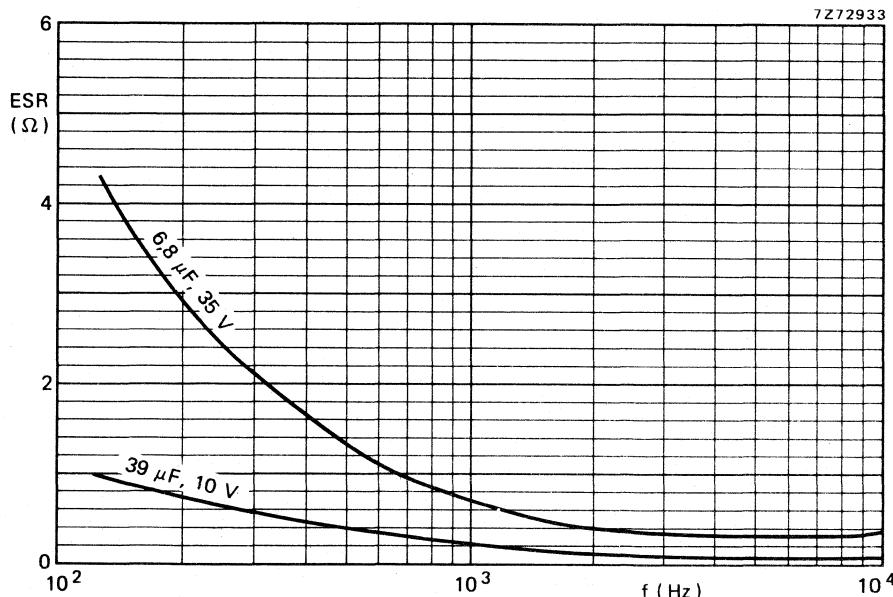


Fig.14 Typical ESR as a function of frequency; case size B.

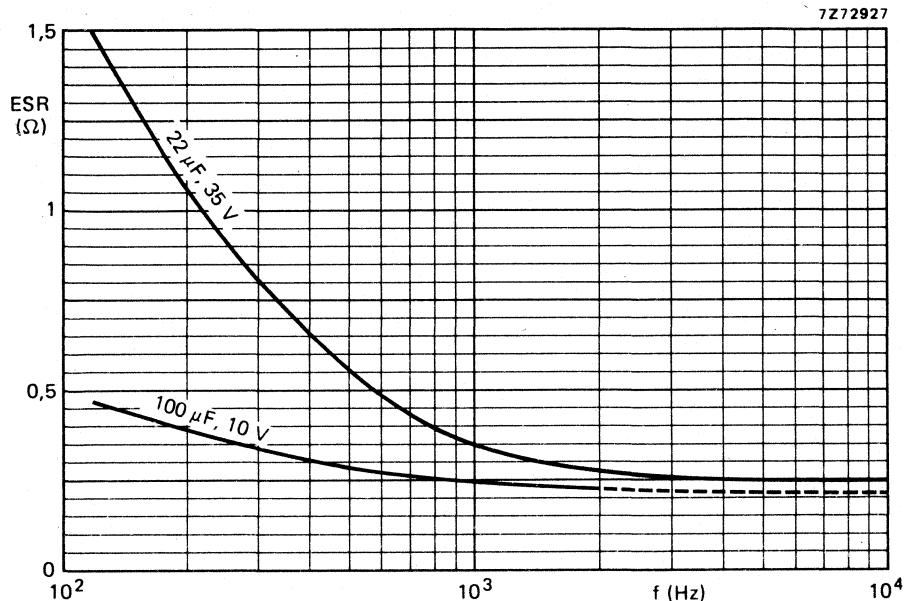


Fig.15 Typical ESR as a function of frequency; case size C.

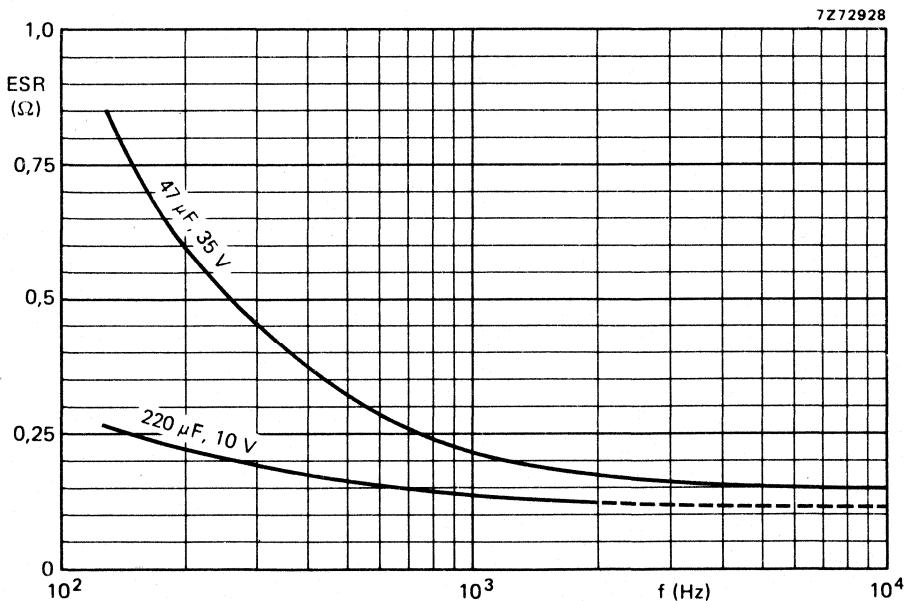


Fig.16 Typical ESR as a function of frequency; case size D.

OPERATIONAL DATA

Category temperature range

Category temperature range

at U_R	-55 to +85 °C
at 0,67 U_R	-55 to +125 °C

Low-impedance applications

A word of caution concerning the use of solid electrolyte tantalum capacitors in low impedance circuits. Solid electrolyte tantalum capacitors do not have the self-healing characteristics of the liquid electrolyte types, nor do the solids have the ability to dampen or disperse current surges in the manner of the liquid electrolyte types. Both of these characteristics of solid electrolyte capacitors result in increased failure rates as the circuit impedance, as seen by the capacitor, is reduced. Experience has shown that a circuit resistance of 3Ω per volt is desirable to limit possible surge damage to the dielectric.

Reliability

The reliability of the solid tantalum capacitor is dependent upon the operating voltage and temperature. This relationship is clearly defined in the reliability alignment chart (Fig.17). The designer may use this nomogram as an aid in predicting failure rate under conditions of voltage and temperature which are different to those for which the failure rate is known.

Note

The failure rates are normally established at maximum rated conditions (85 °C, rated voltage, maximum circuit impedance 3Ω). The alignment chart will then give expected failure rate under actual operating conditions. For example, if a particular batch of capacitors has a failure rate of 0,5%/1000 h at 85 °C, rated voltage, and if these capacitors are operated at 70% of rated voltage and 83 °C, the failure rate will improve by about 2 orders of magnitude to 0,005%/1000 h.

The increase in circuit impedance provides additional improvement in failure rate as shown in Table 4.

Table 4

circuit impedance Ω/V	failure rate improvement (multiplying factors)
0,1	1,0
0,2	0,8
0,4	0,6
0,6	0,4
0,8	0,3
1,0	0,2
2,0	0,1
3 or greater	0,07

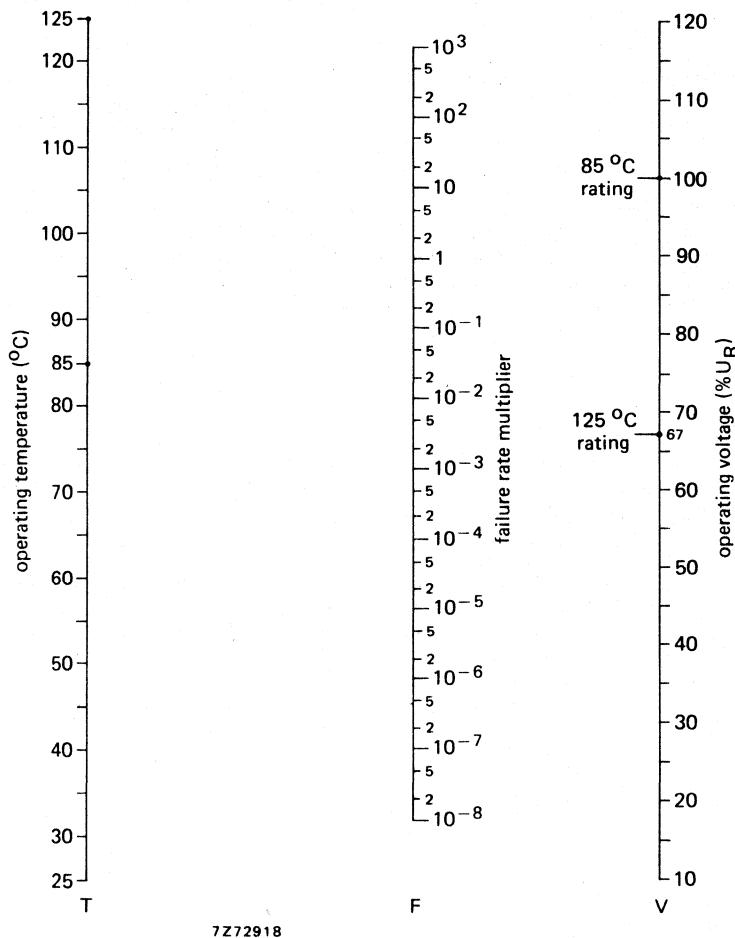


Fig.17 Reliability alignment chart. Connect the temperature and applied voltage of interest with a straight edge. The multiplier of rated failure is given at the intersection of this line with the model scale.

PACKING

- Case size A: 1000 pieces per box.
- Case size B: 1000 pieces per box.
- Case size C: 400 pieces per box.
- Case size D: 300 pieces per box.

SOLID TANTALUM CAPACITORS

hermetic seal tubular case, axial leads

QUICK REFERENCE DATA

Nominal capacitance range (E12 series)	0, 1 to 330 μF
Tolerance on nominal capacitance	$\pm 20\%$ and $\pm 10\%$ ($\pm 5\%$ on request)
Rated voltage range, U_R	6 to 50 V
Category temperature range at U_R at 0,67 U_R	-55 to +85 °C -55 to +125 °C
Endurance test at 85 °C, at U_R at 125 °C, at 0,67 U_R	2000 h 2000 h
Basic specification	MIL-STD-C-39003
Climatic category, IEC 68, at U_R at 0,67 U_R	55/085/56 55/125/56

Selection chart for C- U_R and relevant case sizes.

C_{nom} (μF)	U_R (V)					C_{nom} (μF)	U_R (V)					
	6	10	15	20	35	50	6	10	15	20	35	50
0, 1			A	A			6, 8	A		B	C	
0, 12			A	A			8, 2		B	C	C	
0, 15			A	A			10		B	C	C	
0, 18			A	A			12		B	C	C	
0, 22			A	A			15		B	C	C	
0, 27			A	A			18		B	C	C	
0, 33			A	A			22		B	C	D	
0, 39			A	A			27	B	C	D		
0, 47			A	A			33	B	C	D		
0, 56			A	A			39	B	C	D		
0, 68			A	A			47	B	C	D		
0, 82			A	A			56	B	C	D		
1			A	A			68		C	D		
1, 2			A	B	B		82		C	D		
1, 5			A	B	B		100		C	D		
1, 8			A	B	B		120		C	D		
2, 2			A	B	B		150	C		D		
2, 7		A		B	B		180	C	D			
3, 3		A		B	B		220		D			
3, 9	A			B	B		270	D				
4, 7	A			B	B		330	D				
5, 6	A			B	C							

APPLICATION

These capacitors are designed for use as:

- bypass capacitors;
- coupling capacitors (decoupling);
- filter capacitors;
- blocking capacitors;
- timing capacitors.

They are intended for use in polarized or d.c. biased circuits where the a.c. component is small compared to the d.c. rated voltage.

DESCRIPTION

The capacitors consist of a highly purified sintered tantalum anode body utilizing an electrolytically formed oxide dielectric, and a solid electrolyte, enclosed in a hermetically sealed insulated metal case with axial leads. Standard construction includes tin-lead plated leads.

MECHANICAL DATA

Dimensions in mm (including insulation)

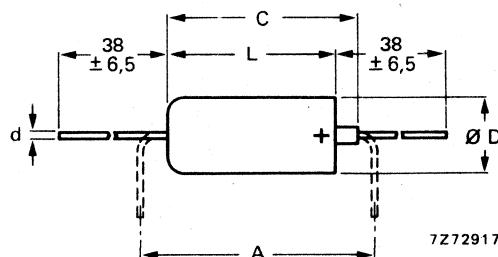


Fig. 1

Table 1

case size	A	D	L	C _{max}	d	approx. mass (g)
A	12,7	3,43	7,26	10,72	0,51	0,7
B	17,8	4,70	+ 0,41	15,49	0,51	1,6
C	25,4	7,34	-0,38	20,88	0,64	4,9
D	27,9	8,92	19,96	23,42	0,64	8,8

Marking

The capacitors are marked as follows :

- 1st line : polarity and company logo;
- 2nd line : nominal capacitance and tolerance on nominal capacitance;
- 3rd line : polarity and rated voltage;
- 4th line : date code (year and week).

Marking examples of capacitors with different case sizes :

<u>case size A</u>	<u>case size B</u>	<u>case size C and D</u>
+NCI	+NCI	+NCI
1.0K ¹⁾	6.8M ¹⁾	100 ± 10%
+ 35 V	+ 25 VDC	+ 10 VDC
7626	7626	7626

¹⁾ K = ± 10%; M = ± 20%.

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 860 to 1060 mbar and a relative humidity of 45 to 75%.

U_R	nom. cap.	max. leakage current at U_R after 5 min at $T_{amb} = 25$ °C (μA) ¹⁾	max. $\tan \delta$	case size	catalogue number ²⁾
V ¹⁾	(μF) ¹⁾		1)		
6	5,6	0,6	0,06	A	2222 143 .3568
	6,8	0,6	0,06	A	.3688
	47	4	0,06	B	.3479
	56	5	0,06	B	.3569
	150	9	0,08	C	.3151
	180	11	0,08	C	.3181
	270	16	0,08	D	.3271
	330	20	0,08	D	.3331
10	3,9	0,6	0,06	A	2222 143 .4398
	4,7	0,7	0,06	A	.4478
	27	4	0,06	B	.4279
	33	5	0,06	B	.4339
	39	5	0,06	B	.4399
	82	8	0,06	C	.4829
	100	10	0,08	C	.4101
	120	12	0,08	C	.4121
	180	18	0,08	D	.4181
	220	20	0,08	D	.4221
15	2,7	0,6	0,06	A	2222 143 .5278
	3,3	0,8	0,06	A	.5338
	18	4	0,06	B	.5189
	22	5	0,06	B	.5229
	56	7	0,06	C	.5569
	68	9	0,06	C	.5689
	120	13	0,08	D	.5121
	150	15	0,08	D	.5151
20	1,2	0,6	0,04	A	2222 143 .6128
	1,5	0,6	0,04	A	.6158
	1,8	0,6	0,04	A	.6188
	2,2	0,7	0,04	A	.6228
	8,2	2,5	0,06	B	.6828

¹⁾ See also corresponding paragraph.

²⁾ Replace dot in catalogue number by : 1 for capacitance tolerance $\pm 20\%$;
8 for capacitance tolerance $\pm 10\%$.

Table 2 (continued)

U_R (V) ¹⁾	nom. cap. (μF) ¹⁾	max. leakage current at U_R after 5 min at $T_{amb} = 25^\circ C$ (μA) ¹⁾	max. tan δ 1)	case size	catalogue number ²⁾
20	10	3,0	0,06	B	2222 143 .6109
	12	3,5	0,06	B	.6129
	15	5	0,06	B	.6159
	27	5	0,06	C	.6279
	33	6	0,06	C	.6339
	39	6	0,06	C	.6399
	47	7	0,06	C	.6479
	56	8,5	0,06	D	.6569
	68	10	0,06	D	.6689
	82	12	0,06	D	.6829
	100	15	0,06	D	.6101
35	0,1	0,6	0,04	A	2222 143 .7107
	0,12	0,6	0,04	A	.7127
	0,15	0,6	0,04	A	.7157
	0,18	0,6	0,04	A	.7187
	0,22	0,6	0,04	A	.7227
	0,27	0,6	0,04	A	.7277
	0,33	0,6	0,04	A	.7337
	0,39	0,6	0,04	A	.7397
	0,47	0,6	0,04	A	.7477
	0,56	0,6	0,04	A	.7567
	0,68	0,6	0,04	A	.7687
	0,82	0,6	0,04	A	.7827
	1,0	0,6	0,04	A	.7108
	1,2	0,6	0,04	B	.7128
	1,5	0,8	0,04	B	.7158
	1,8	1	0,04	B	.7188
	2,2	1,2	0,04	B	.7228
	2,7	1,4	0,04	B	.7278
	3,3	1,7	0,04	B	.7338
	3,9	2	0,04	B	.7398
	4,7	2,5	0,04	B	.7478
	5,6	3	0,06	B	.7568
	6,8	3,5	0,06	B	.7688
	8,2	3,5	0,06	C	.7828
	10	4	0,06	C	.7109
	12	4	0,06	C	.7129

¹⁾ See also corresponding paragraph.²⁾ Replace dot in catalogue number by: 1 for capacitance tolerance $\pm 20\%$;
8 for capacitance tolerance $\pm 10\%$.

Table 2 (continued)

U_R (V) 1)	nom. cap. (μF) 1)	max. leakage current at U_R after 5 min at $T_{amb} = 25^\circ C$ (μA) 1)	max. tan δ 1)	case size	catalogue number 2)
35	15	6	0,06	C	2222 143 .7159
	18	6	0,06	C	.7189
	22	7	0,06	C	.7229
	27	7	0,06	D	.7279
	33	8	0,06	D	.7339
	39	10	0,06	D	.7399
	47	10	0,06	D	.7479
50	0,1	0,6	0,04	A	2222 143 .8107
	0,12	0,6	0,04	A	.8127
	0,15	0,6	0,04	A	.8157
	0,18	0,6	0,04	A	.8187
	0,22	0,6	0,04	A	.8227
	0,27	0,6	0,04	A	.8277
	0,33	0,6	0,04	A	.8337
	0,39	0,6	0,04	A	.8397
	0,47	0,6	0,04	A	.8477
	0,56	0,6	0,04	A	.8567
	0,68	0,6	0,04	A	.8687
	0,82	0,7	0,04	A	.8827
	1,0	0,8	0,04	A	.8108
	1,2	0,9	0,04	B	.8128
	1,5	1,2	0,04	B	.8158
	1,8	1,4	0,04	B	.8188
	2,2	1,7	0,04	B	.8228
	2,7	2	0,04	B	.8278
	3,3	2,5	0,04	B	.8338
	3,9	3	0,04	B	.8398
	4,7	3,5	0,04	B	.8478
	5,6	4,5	0,04	C	.8568
	6,8	5	0,06	C	.8688
	8,2	5	0,06	C	.8828
	10	5	0,06	C	.8109
	12	6	0,06	C	.8129
	15	6	0,06	C	.8159
	18	7	0,06	C	.8189
	22	8	0,06	D	.8229

1) See also corresponding paragraph.

2) Replace dot in catalogue number by : 1 for capacitance tolerance $\pm 20\%$;8 for capacitance tolerance $\pm 10\%$.

Note : The following versions are available on request:

$U_R = 35 \text{ V}$;

capacitance range (E12 series) : 0,0047 to 0,082 μF ; case size A.

$U_R = 75 \text{ V}$;

capacitance range (E12 series) : 0,0047 to 0,68 μF ; case size A;
0,82 to 3,9 μF ; case size B;

4,7 to 10 μF ; case size C;

12 to 15 μF ; case size D.

$U_R = 100 \text{ V}$;

capacitance range (E12 series) : 0,0047 to 0,56 μF ; case size A;

0,68 to 2,7 μF ; case size B.

On request the above-mentioned capacitance values, and all capacitance values in Table 2, are available with a tolerance of $\pm 5\%$.

Capacitance

Nominal capacitance values at 100 Hz

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$ and $\pm 10\%$

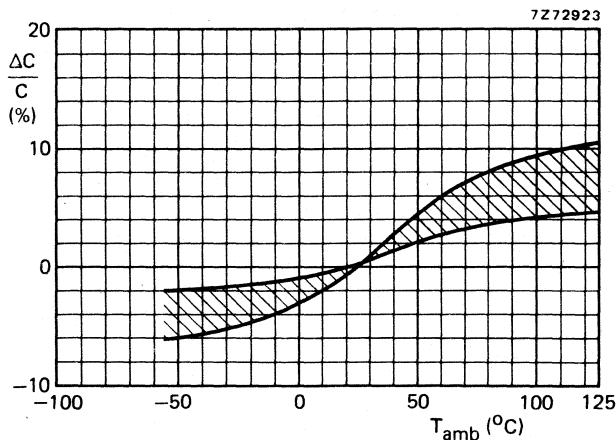


Fig. 2. Typical capacitance as a function of ambient temperature.

The change in capacitance from initial 25 °C measured capacitance shall not exceed the following percentages :

10% at -55 °C;

8% at +85 °C;

12% at +125 °C.

VoltageRated voltage

Rated voltage = maximum permissible voltage at -55 to +85 °C U_R , see Table 2

The capacitors may be further operated upto 125 °C by derating the rated voltage in accordance with the following graph.

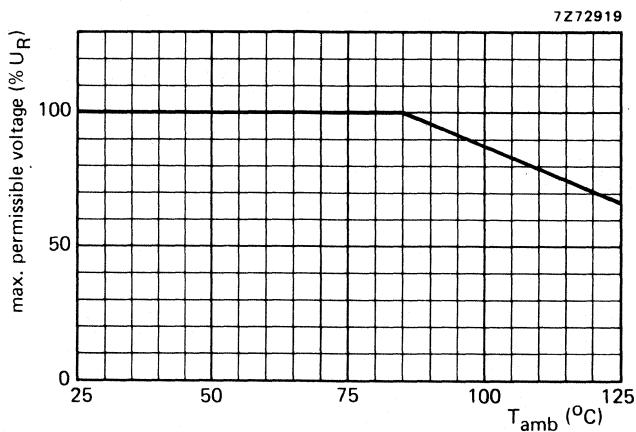


Fig. 3. Maximum permissible voltage as a function of ambient temperature.

Surge voltage

The surge voltage (see Table 3) is the maximum short duration voltage which may be applied to the capacitor; i.e. turn-on transients, peak a.c. voltage, or any other voltage pulses which may be superimposed on the rated voltage. In no case may the sum of the a.c. voltage and the applied rated voltage exceed the rated d.c. surge voltage.

Table 3

U_R (V)	surge voltage (V)	
	at ≤ 85 °C	at 85 to 125 °C
6	8	5
10	13	9
15	20	12
20	26	16
35	46	28
50	65	40
75	97	64
100	130	86

Surge voltage test

The appropriate surge voltage shall be applied to the test capacitors via a 1000Ω series limiting resistor for 30 s. The test capacitors shall then be discharged via the 1000Ω resistor for $5\frac{1}{2}$ min. This charge-discharge cycle shall be repeated 2000 times.

Following the surge test the following requirements must be met:

- capacitance shall not change more than $\pm 5\%$;
- dissipation factor shall meet initial requirements;
- d.c. leakage current shall meet initial requirements.

Reverse voltage

Reverse voltage = maximum d.c. voltage applied in the reverse polarity at the maximum category temperature

0,5 V

Ripple voltage

As in all electrical equipment the temperature rise in a capacitor must be controlled. The temperature rise is a result of the I^2R loss in the Equivalent Series Resistance (ESR) of the capacitor when the capacitor is subjected to an a.c. ripple current. To insure safe operating conditions the sum of the applied d.c. voltage and peak a.c. voltage should not exceed the rated voltage of the capacitor.

The maximum permissible a.c. voltage (r.m.s. value) at 60 Hz and 25 °C is shown in Fig. 4. For the maximum permissible a.c. voltage at other operating conditions multiply the maximum permissible a.c. voltage found in Fig. 4 by the appropriate temperature derating factor from Fig. 5 and frequency derating factor from Fig. 6.

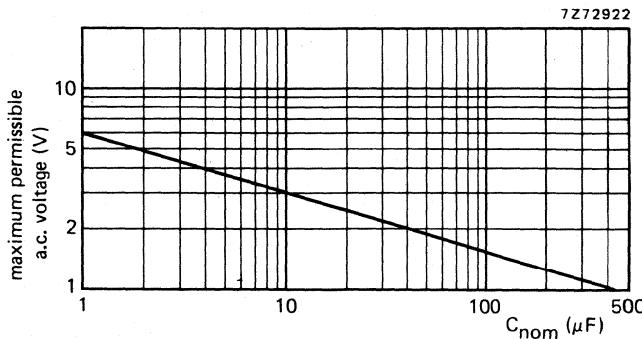


Fig. 4. Maximum permissible a.c. voltage at 25 °C and 60 Hz as a function of nominal capacitance.

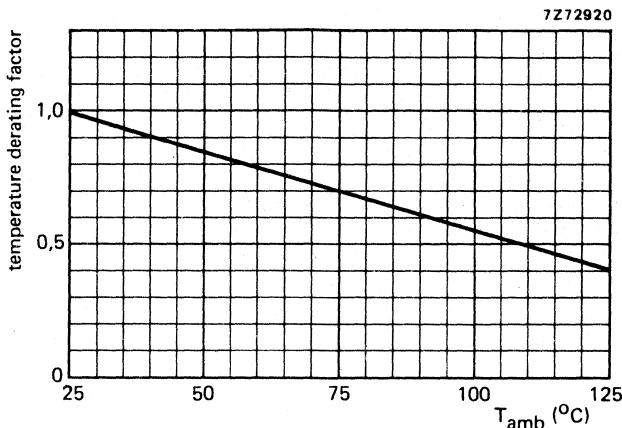


Fig. 5. Effect of temperature on maximum permissible a.c. voltage.

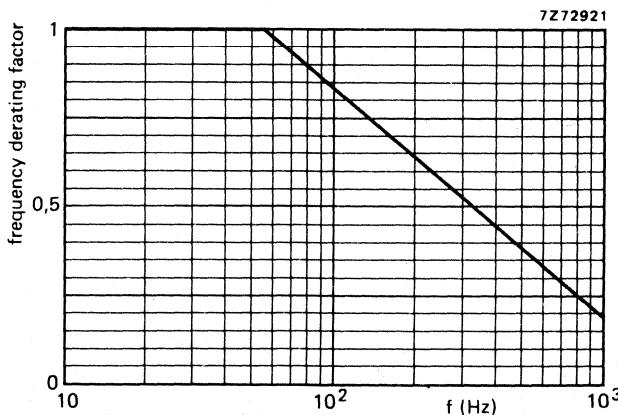


Fig. 6. Effect of frequency on maximum permissible a.c. voltage.

Example: At 125 °C the maximum permissible ripple voltage of 400 Hz that can be applied to a capacitor of 10 µF is found in the following way. Fig. 4 shows 2,7 V at 25 °C and 60 Hz; from Fig. 5 the temperature derating factor at 125 °C is 0,4, from Fig. 6 the frequency derating factor at 400 Hz is 0,45. At the stated conditions the maximum permissible ripple voltage is $2,7 \times 0,4 \times 0,45 = 0,486 \text{ V}$.

Leakage current

Maximum leakage current 5 min after application

of the rated voltage U_R at 25 °C

at 85 °C

at 125 °C

see Table 2

10 x value stated in Table 2

12 x value stated in Table 2

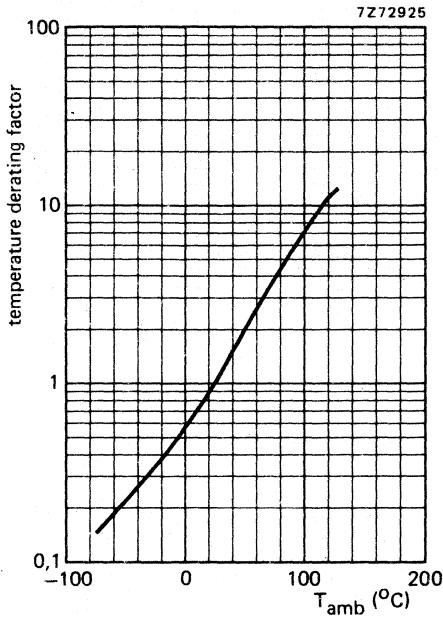


Fig. 7. Typical effect of ambient temperature on leakage current.

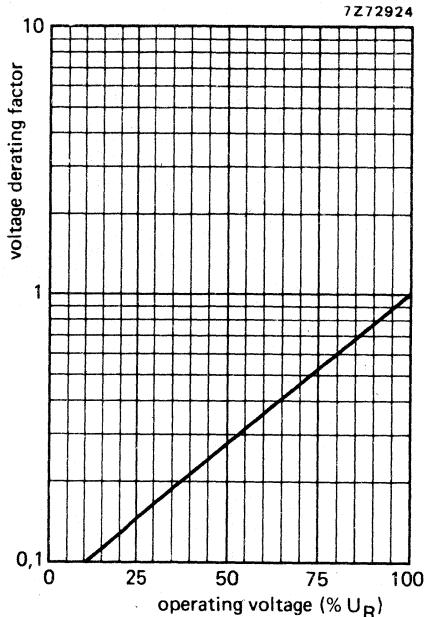


Fig. 8. Typical effect of operating voltage on leakage current.

Tan δ (dissipation factor)

Tan δ at 100 Hz at -55 to +85 °C, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Impedance

The impedance is measured by means of a four-terminal circuit (Thomson circuit). See graphs on the following pages.

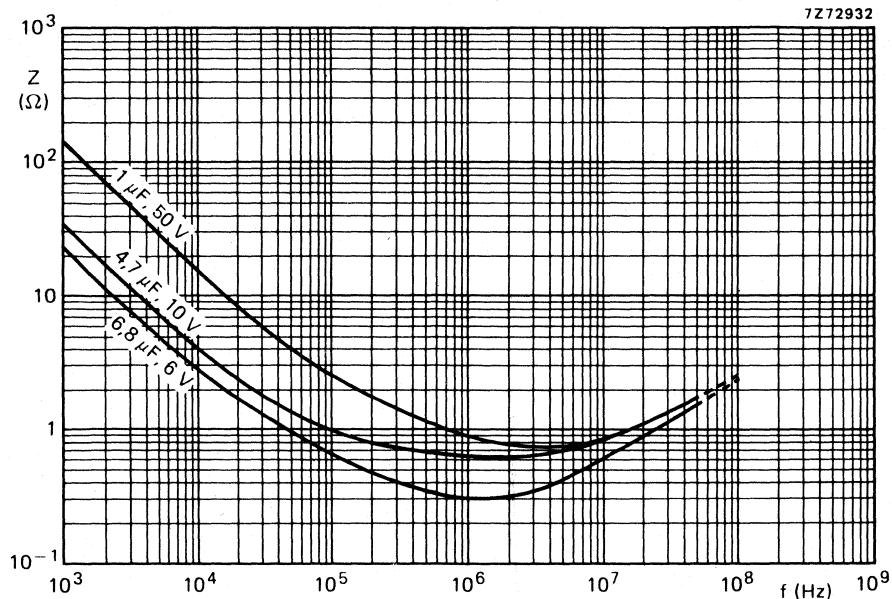


Fig. 9. Typical impedance as a function of frequency at 25 °C; case size A.

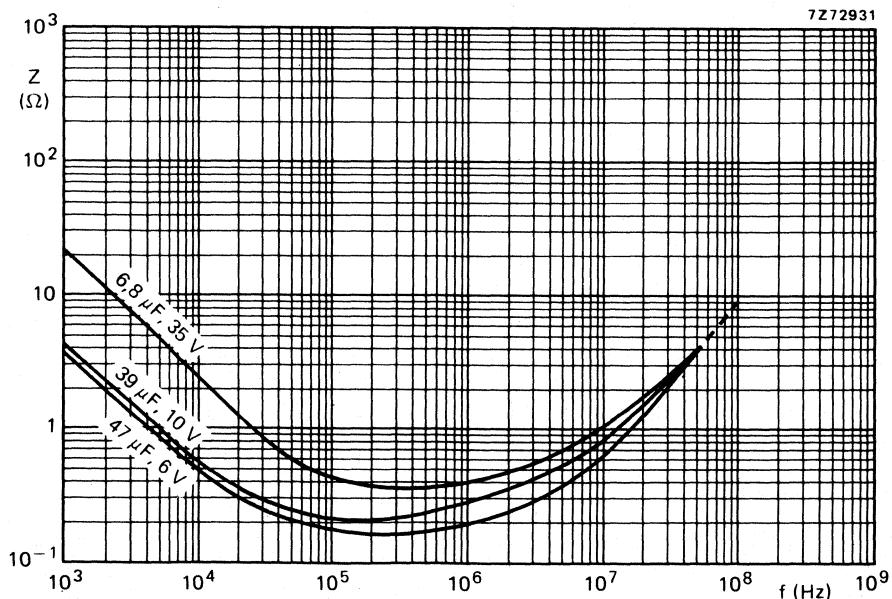


Fig. 10. Typical impedance as a function of frequency at 25 °C; case size B.

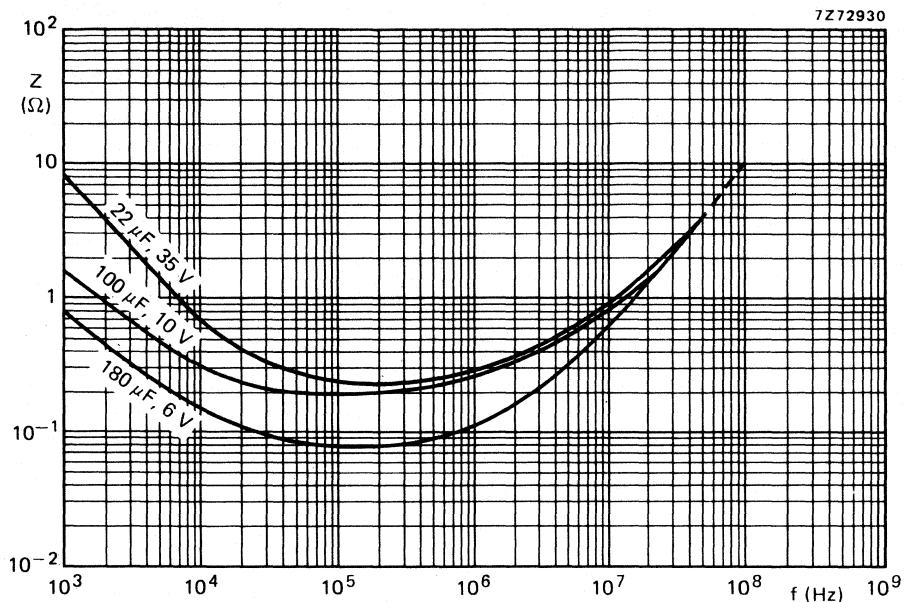


Fig. 11. Typical impedance as a function of frequency at 25 °C; case size C.

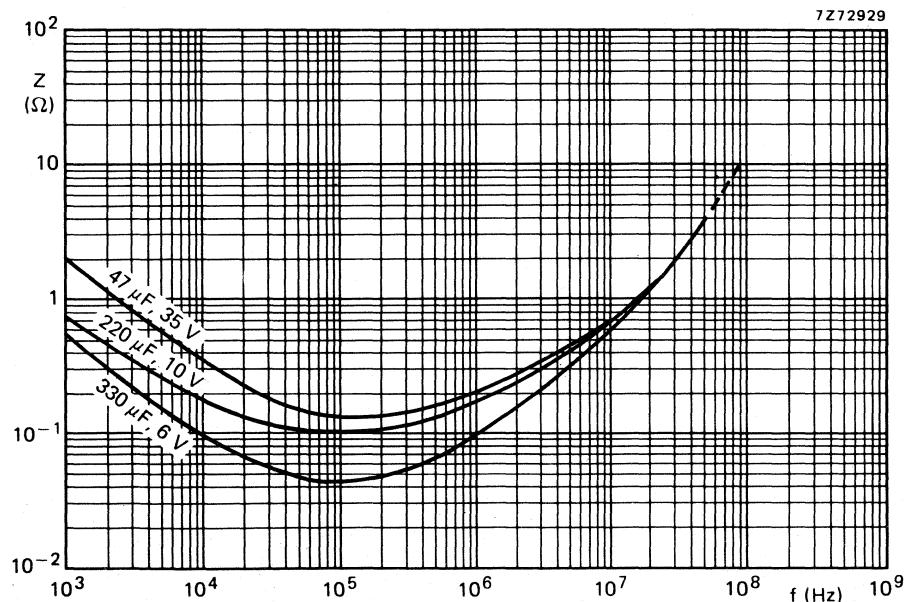


Fig. 12. Typical impedance as a function of frequency at 25 °C; case size D.

Equivalent series resistance (ESR = $\tan \delta / \omega C$)Tan δ and C at 100 Hz

see Table 2

7272926

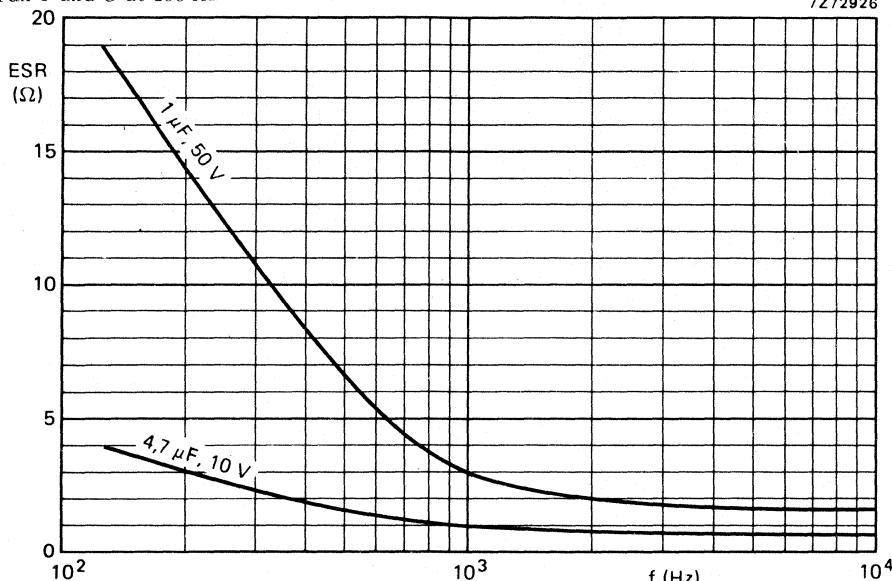


Fig. 13. Typical ESR as a function of frequency; case size A.

7272933

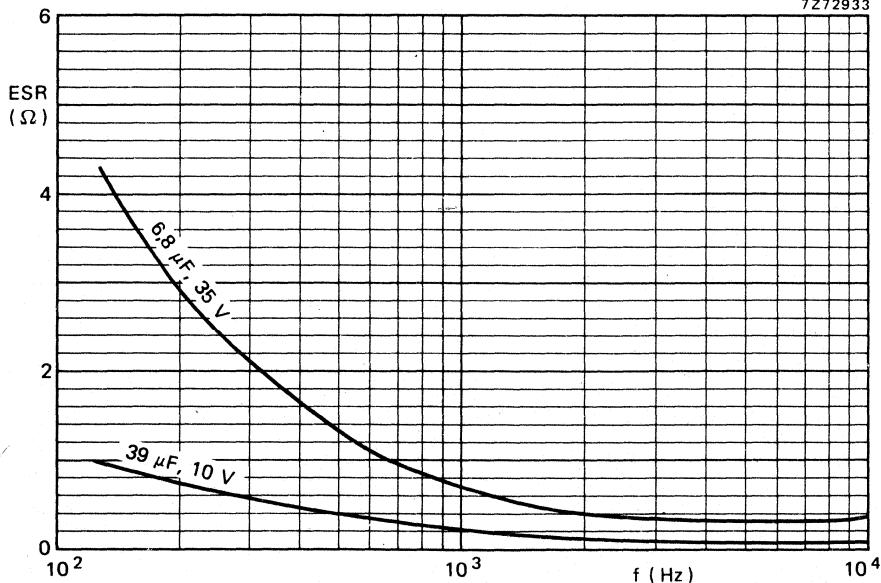


Fig. 14. Typical ESR as a function of frequency; case size B.

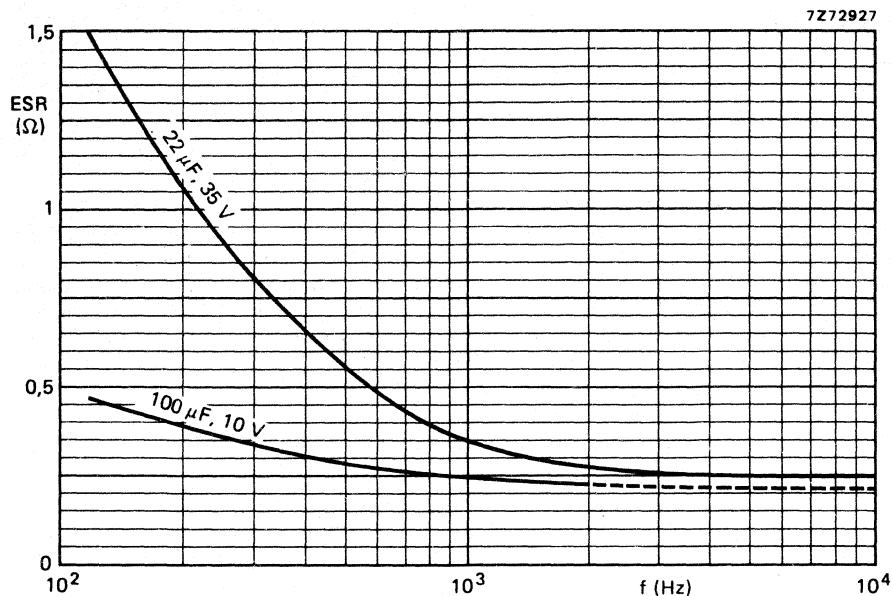


Fig. 15. Typical ESR as a function of frequency; case size C.

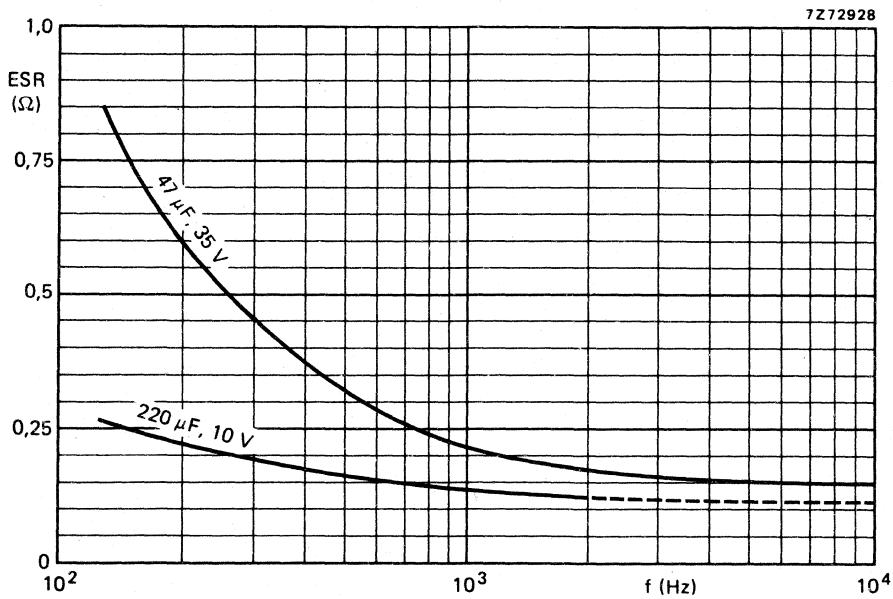


Fig. 16. Typical ESR as a function of frequency; case size D.

OPERATIONAL DATA**Category temperature range**

Category temperature range at U_R	-55 to +85 °C
at 0,67 U_R	-55 to +125 °C

Low-impedance applications

A word of caution concerning the use of solid electrolyte tantalum capacitors in low impedance circuits. Solid electrolyte tantalum capacitors do not have the "self-healing" characteristics of the liquid electrolyte types, nor do the solids have the ability to dampen or disperse current surges in the manner of the liquid electrolyte types. Both of these characteristics of solid electrolyte capacitors result in increased failure rates as the circuit impedance, as seen by the capacitor, is reduced. Experience has shown that a circuit resistance of 3Ω per volt is desirable to limit possible surge damage to the dielectric.

Reliability

The reliability of the solid tantalum capacitor is dependent upon the operating voltage and temperature. This relationship is clearly defined in the reliability alignment chart (Fig. 17). The designer may use this nomogram as an aid in predicting failure rate under conditions of voltage and temperature which are different than those for which the failure rate is known.

Note : The failure rates are normally established at maximum rated conditions (85 °C, rated voltage, maximum circuit impedance 3Ω). The alignment chart will then give expected failure rate under actual operating conditions. For example, if a particular batch of capacitors has a failure rate of 0,5%/1000 h at 85 °C, rated voltage and if these capacitors are operated at 70% of rated voltage and 83 °C, the failure rate will improve by about 2 orders of magnitude to 0,005%/1000 h.
The increase in circuit impedance provides additional improvement in failure rate as shown in Table 4.

Table 4 - Failure rate improvement with circuit impedance.

Circuit impedance (Ω/V)	Failure rate improvement (multiplying factors)
0,1	1,0
0,2	0,8
0,4	0,6
0,6	0,4
0,8	0,3
1,0	0,2
2,0	0,1
3 or greater	0,07

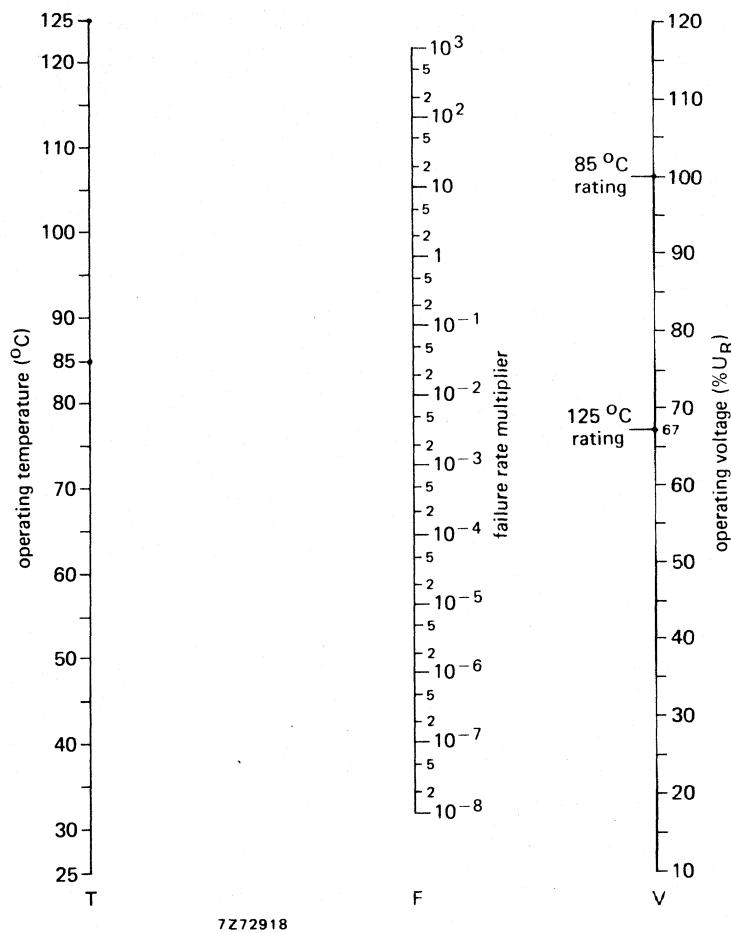


Fig. 17. Reliability alignment chart.

Connect the temperature and applied voltage of interest with a straight edge. The multiplier of rated failure is given at the intersection of this line with the model scale.

PACKING

Capacitors with case size A : 1000 pieces per box;
 case size B : 1000 pieces per box;
 case size C : 400 pieces per box;
 case size D : 300 pieces per box.

TESTS AND REQUIREMENTS

Life test

Capacitors shall be life tested for 2000 h at 85 °C or 125 °C with the appropriate rated voltage applied.

After life test when measured at 25 °C the dissipation factor shall meet the initial requirement. The leakage current shall not be more than 125% of the original requirements and capacitance shall not have changed more than $\pm 10\%$ from the initial value. Not more than 1 failure shall be permitted in 25 units tested.

Environmental tests

1. Low-frequency vibration

The capacitors shall be rigidly mounted by suitable case clamps and subjected to a simple harmonic motion having a maximum amplitude of 0,03 in. The frequency shall be varied uniformly over a frequency range of 10 to 55 Hz in approximately 1 min at a uniform rate for a total of 2 h. Rated voltage will be applied to the units during test. During the last $\frac{1}{2}$ hour of test, the test units will be monitored by an instrument capable of detecting intermittent open or short circuits with a duration of 0,5 ms or greater. After vibration the capacitors shall meet the initial requirements of dissipation factor and leakage current. The capacitance shall not change more than $\pm 5\%$ from the initial measured value.

1A. High-frequency vibration

The capacitors shall be rigidly mounted by suitable case clamps and subjected to a simple harmonic motion having a maximum amplitude of 0,03 in or 15 g in 2 mutually perpendicular directions (1 parallel and 1 perpendicular to the cylindrical axis). Capacitors shall withstand vibration from 10 to 10 000 Hz at 15 g without internal damage. The frequency shall be varied uniformly over a frequency range of 55 to 2000 Hz in approximately 20 min at a uniform rate for a total of 4 h. Rated voltage will be applied to the units during test. During the last $\frac{1}{2}$ hour of test the test units will be monitored by an instrument capable of detecting intermittent open or short circuits with a duration of 0,5 ms or greater.

After vibration the capacitors shall meet the initial requirements of dissipation factor and leakage current. The capacitance shall not change more than $\pm 5\%$ from the initial measured value.

2. Lead strength

With the body of the capacitor secured, the leads shall withstand a 3 lb load applied in any direction for 30 s.

3. Lead bend

Each capacitor lead shall be capable of withstanding 5 bends. A bend shall be defined as follows :

With the capacitor vertical and 1 lb weight attached to the lead, the capacitor body shall be slowly rotated (in approximately 5 s) to a horizontal position and then rotated to the vertical position. The 4 succeeding bends shall then be made in the same manner but in alternate directions.

4. Moisture resistance

The capacitors shall be tested in accordance with method 106 of MIL Standard 202. The following details and exceptions shall apply:

- a. Mounting: the capacitors shall be securely mounted by normal mounting means during the test. This does not apply during measurements.
- b. Initial measurements are not applicable.
- c. Polarization and loading voltages are not applicable during the test.
- d. Final measurements: within 2 to 6 hours after the capacitors have been removed from the humidity chamber following the final cycle, the d.c. leakage, capacitance and dissipation factor shall be measured as specified.
- e. Examinations after test: following the final measurements the capacitors shall be examined visually for evidence of corrosion, mechanical damage and obliteration of marking.

5. Insulation sleeves

For insulated capacitors, the insulating sleeves shall be tested as follows for dielectric strength and insulation resistance:

Two wire windings shall be placed around the insulating sleeves $\frac{1}{4}$ in apart. Each winding to consist of 2 close turns of 24 AWG bare copper wire.

5A. Dielectric strength

For dielectric strength a d.c. test potential of 2000 V shall be applied for 1 min between the 2 windings. There shall be no breakdown of case insulation.

5B. Insulation resistance

For insulation resistance a d.c. test potential of 100 V shall be applied for 2 min. The insulation resistance shall not be less than $100 \text{ M}\Omega$.

6. Shelf life test

When the capacitors have been exposed to 5000 h shelf life test at 85 °C with no voltage applied, capacitance shall not change more than $\pm 4\%$ from the initial measured value. The dissipation factor shall not exceed 150% of the initial requirement and the leakage current shall meet the initial requirement.

7. Shock

The capacitors shall be tested for shock resistance in accordance with MIL Standard 202 method 213, with the following exceptions.

- a. The capacitors shall be rigidly mounted by suitable body clamps.
- b. The capacitors shall be subjected to 18 impacts of 100 g with a 6 ms duration, as described under condition I, method 213.
- c. Rated voltage shall be applied to the capacitors during the shock test.

The test units shall be monitored during test by an instrument capable of detecting intermittent open and short circuits with a duration of 0,5 ms or greater. After test the capacitors shall meet the initial requirements for capacitance, dissipation factor and leakage current.

8. Temperature and immersion cycling

After the capacitors are tested as specified in 8A and 8B, the leakage current shall meet the initial requirement. The capacitance change shall not exceed $\pm 5\%$ of the value measured prior to test and the dissipation factor shall meet the initial requirement. When examined visually, at least 90% of all exposed metallic surfaces shall show no evidence of harmful corrosion. When examined internally, there shall be no evidence of dye penetration.

8A. Temperature shock

Capacitors shall be tested in accordance with method 107 of MIL Standard 202. The following exceptions and details shall apply :

- a. Capacitors should be conditioned at a temperature of 25 °C for 15 min before the first cycle of test one.
- b. The B test condition will be followed except that in the third step thereof, the capacitors will be subjected to a test at the highest applicable temperature.
- c. Measurements before and after cycling may be omitted.

8B. Immersion cycling

After temperature cycling, a capacitor test should be made following Method 104 set down in MIL Standard 202. The following details and exceptions, however, shall apply:

- a. A non-corrosive dye, Rhodamine B (tetraethylrhodamine), or its equivalent, shall be added in both baths in addition to steps provided in test condition B.
- b. Measurements after final cycle.
Measurements of leakage current, capacitance and dissipation factor shall be made within 30 min after the capacitors are removed from the final immersion bath.
- c. Examinations after test.
The capacitors shall be visually examined for traces of corrosion, mechanical damage, and obliteration of marking. Capacitors shall then be sectioned for evidence of dye penetration.

9. Reduced pressure


After the capacitors have been stabilized for 5 min in a vacuum of 22,53 Pa (= $1,69 \times 10^{-1}$ torr), rated voltage shall be applied for 1 min. There shall be no voltage flashover nor shall the end seals show evidence of damage by this test. The capacitance, dissipation factor, and leakage current shall meet the initial requirements.

MAINTENANCE TYPES



ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature types
- Axial leads (on bandoliers) or single ended
- General and industrial applications

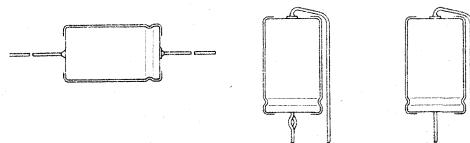

QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	0,47 to 680 μ F
Tolerance on nominal capacitance	-10 to + 50%
Rated voltage range, U_R (R5 series)	4 to 100 V
Category temperature range	-40 to + 85 °C
Endurance test at 85 °C	2000 h
Basic specification	IEC 384-4, long-life grade
Climatic category	40/085/56
IEC 68	GPF
DIN 40040	

Selection chart for C_{nom} – U_R and relevant case sizes.

C_{nom} μ F	U_R (V)							
	4	6,3	10	16	25	40	63	100
0,47							3	
1							3	
1,5							3	
2,2							3	3
3,3							3	
4,7							3	4
6,8							3	
10							3	5
15						3	4/5a	
22					3	4/5a	5	6
33				3		4/5a		
47			3		4/5a	5	6	7
68		3		4/5a			7	
100	3		4/5a		5	6		
150		4/5a		5	6	7		
220	4/5a		5	6	7			
330	5		6	7				
470		6	7					
680		7						

case size	nominal dimensions (mm)
3	ϕ 6 x 10
5a	ϕ 8 x 11
4	ϕ 6,5 x 18
5	ϕ 8 x 18
6	ϕ 10 x 18
7	ϕ 10 x 25

2222 015

2222 016

APPLICATION

These capacitors are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications such as measuring and regulating circuits. Other applications are in timing and delay circuits. The taped versions are extremely suitable for automatic insertion and for cutting and forming equipment.

DESCRIPTION

The capacitor has etched aluminium foil electrodes rolled up with a porous paper spacer with separates the anode and the cathode. The spacer is impregnated with an electrolyte which is the electrical connection between dielectric and cathode foil and retains its good characteristics both at low and at high temperatures. The capacitor is housed in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitor is available in 3 styles, all with soldered-copper leads.

Style 1: axial leads; supplied on bandoliers in boxes or on reels;

Style 2: single ended; with self-locking lead;

Style 3: single ended;

MECHANICAL DATA

Dimensions in mm



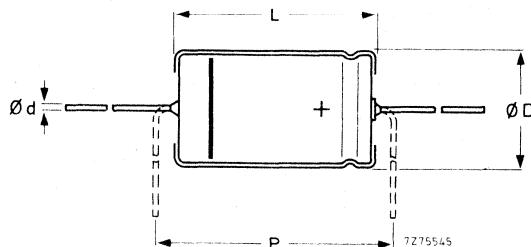



Fig. 1 Style 1; see Table 1a for dimensions d, D, L and P.

Table 1a

case size	d	style 1					mass approx. g
		D _{nom}	L _{nom}	D _{max}	L _{max}	P _{min}	
3	0,6	6,0	10,0	6,3	10,5	15	0,7
5a	0,6	8,0	11,0	8,5	11,5	15	1,1
4	0,8	6,5	18,0	6,9	18,5	25	1,3
5	0,8	8,0	18,0	8,5	18,5	25	1,7
6	0,8	10,0	18,0	10,5	18,5	25	2,5
7	0,8	10,0	25,0	10,5	25,0	30	3,3

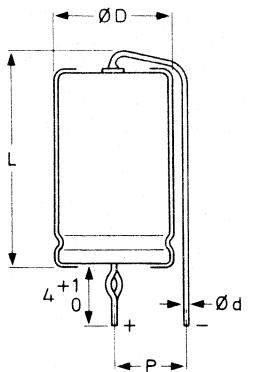

7276904.1

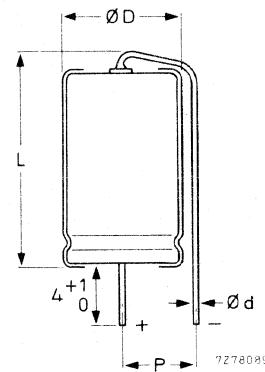

7278089

Fig. 2 Style 2, non-preferred; see Table 1b
for dimensions d, D, L and P.

Fig. 3 Style 3; see Table 1b for dimensions
d, D, L and P.

Table 1b

case size	d	style 2			style 3			mass approx. g
		D _{max}	L _{max}	P	D _{max}	L _{max}	P	
3	0,6				6,3	12,5	3,5-7,5	0,55
5a	0,6				8,5	13,0	5 -10	1,0
4	0,8	6,9	21,5	5 -10	6,9	21,5	5 -10	1,2
5	0,8	8,5	21,5	5 -10	8,5	21,5	5 -10	1,6
6	0,8	10,5	21,5	7,5-12,5	10,5	21,5	7,5-12,5	2,3
7	0,8	10,5	28,0	7,5-12,5	10,5	28,0	7,5-12,5	3,1

Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- grade reference (for long-life grade only);
- group number 015 or 016; code for origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal (on case sizes 4 to 7 only).

Mounting

The diameter of the mounting holes in the printed-wiring board is 0,8 + 0,1 mm for case sizes 3 and 5a, and 1 + 0,1 for case sizes 4 to 7, except that of the hole for the anode lead of style 2 capacitors: 1,3 + 0,1 mm.

Minimum atmospheric pressure

8,5 kPa

ELECTRICAL DATA

Table 2 (notes follow the table)

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nom. cap.	max. r.m.s. ripple current at upper cat. temperature	max. leakage current at U_R after 5 min	typ. ESR	max. $\tan \delta$	max. impedance at 10 kHz	case size	catalogue number* 2222 followed by
V	μF	mA	μA	Ω				
4	100	44	20	4,0	0,40	2,6	3	015 .2101
4	220	70	44	1,8	0,40	1,2	5a	015 .2221
4	220	85	9	1,8	0,38	1,2	4	016 .2221
4	330	125	12	1,2	0,38	0,8	5	016 .2331
6,3	68	44	22	4,7	0,32	2,9	3	015 .3689
6,3	150	70	48	2,1	0,32	1,3	5a	015 .3151
6,3	150	85	10	2,1	0,30	1,3	4	016 .3151
6,3	470	190	22	0,68	0,30	0,4	6	016 .3471
6,3	680	270	30	0,47	0,30	0,3	7	016 .3681
10	47	44	24	5,4	0,26	3,4	3	015 .4479
10	100	70	50	2,6	0,26	1,6	5a	015 .4101
10	100	85	10	2,6	0,24	1,6	4	016 .4101
10	220	125	18	1,2	0,24	0,7	5	016 .4221
10	330	190	24	0,77	0,24	0,5	6	016 .4331
10	470	270	33	0,54	0,24	0,3	7	016 .4471
16	33	44	27	5,8	0,18	3,6	3	015 .5339
16	68	70	53	2,8	0,18	1,8	5a	015 .5689
16	68	85	11	2,8	0,17	1,8	4	016 .5689
16	150	125	19	1,3	0,17	0,80	5	016 .5151
16	220	190	26	0,87	0,17	0,55	6	016 .5221
16	330	270	36	0,58	0,17	0,36	7	016 .5331
25	22	37	28	7,2	0,15	4,1	3	015 .6229
25	47	60	56	3,4	0,15	1,9	5a	015 .6479
25	47	72	12	3,4	0,14	1,9	4	016 .6479
25	100	105	19	1,6	0,14	0,90	5	016 .6101
25	150	155	27	1,1	0,14	0,60	6	016 .6151
25	220	220	37	0,72	0,14	0,41	7	016 .6221

Table 2 (continued)

U_R	nom. cap.	max. r.m.s. ripple current at upper cat. temperature	max. leakage current at U_R after 5 min.	typ. ESR	max. $\tan \delta$	max. impedance at 10 kHz	case size	catalogue number* 2222 followed by
V	μF	mA	μA	Ω			.	
40	15	37	30	8,5	0,12	4,7	3	015 .7159
40	22	50	44	5,8	0,12	3,2	5a	015 .7229
40	22	60	12	5,8	0,11	3,2	4	016 .7229
40	33	60	60	3,9	0,12	2,1	5a	015 .7339
40	33	72	12	3,9	0,11	2,1	4	016 .7339
40	47	105	16	2,7	0,11	1,5	5	016 .7479
40	100	155	28	1,3	0,11	0,70	6	016 .7101
40	150	220	40	0,85	0,11	0,47	7	016 .7151
63	0,47	7	5	200	0,09	117	3	015 .8477
63	1	10	5	95	0,09	55	3	015 .8108
63	1,5	12	5	64	0,09	37	3	015 90043**
63	2,2	15	7	43	0,09	25	3	015 .8228
63	3,3	17	11	29	0,09	17	3	015 .8338
63	4,7	22	15	20	0,09	12	3	015 90044**
63	6,8	25	22	14	0,09	8,1	3	015 .8688
63	10	30	32	9,6	0,09	5,5	3	015 .8109
63	15	43	48	6,4	0,09	3,7	5a	015 .8159
63	15	55	10	6,4	0,09	3,7	4	016 .8159
63	22	80	13	4,3	0,09	2,5	5	016 .8229
63	47	115	22	2,0	0,09	1,2	6	016 .8479
63	68	165	30	1,4	0,09	0,81	7	016 .8689
100	2,2	25	11	43	0,09	21	3	015 .9228
100	4,7	36	22	20	0,09	9,5	4	016 .9478
100	10	60	50	9,6	0,09	4,5	5	016 .9109
100	22	104	80	4,3	0,09	2,1	6	016 .9229
100	47	145	33	2,0	0,09	0,96	7	016 90106**

* Replace dot in catalogue number by:

2 for style 1 on bandoliers on reel (preferred for case sizes 3 and 4);

3 for style 1 on bandoliers in box (preferred for case sizes 5a, 5, 6 and 7);

7 for style 2 (case sizes 4 to 7); non-preferred;

8 for style 3.

** Catalogue number for style 1 capacitors on bandoliers in box is given. For other packing and styles, see Table 3 for the corresponding catalogue number.

Table 3

last 5 digits of catalogue number

style 1 capacitors on bandoliers in box	style 1 capacitors on bandoliers on reel	style 2 capacitors	style 3 capacitors
90043	90041		90076
90044	90042		90068
90106		90113	90114

Capacitance

Nominal capacitance values at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 2
-10 to + 50%

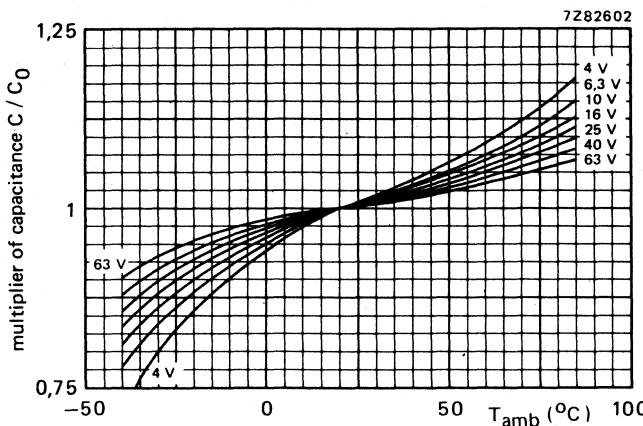


Fig. 4 Typical capacitance as a function of ambient temperature; C_0 = capacitance at 20°C , 100 Hz.

Voltage

Rated voltage = max. permissible voltage

$\leq 40^{\circ}\text{C}$	$40 \text{ to } 85^{\circ}\text{C}$
$1,1 \times U_R$	U_R
$\leq 1,1 \times U_R$	$\leq U_R$
\leq applied d.c. voltage + 1 V	1 V
	$1,15 \times U_R$
	1 V

Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage with d.c. voltage applied
- c) max. peak a.c. voltage without d.c. voltage applied

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

Ripple current **

Maximum permissible r.m.s. ripple current

at 100 Hz and $T_{amb} = 85^{\circ}\text{C}$

see Table 2

at 100 Hz and $T_{amb} = 70^{\circ}\text{C}$

1.7 x values of Table 2

at 100 Hz and $T_{amb} < 60^{\circ}\text{C}$

2.2 x values of Table 2

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

** Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

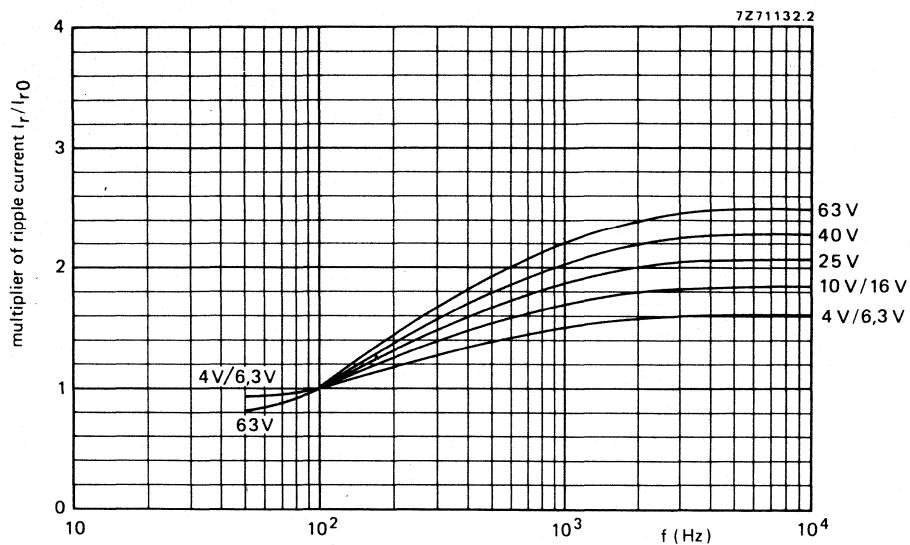


Fig. 5 Typical ripple current as a function of frequency; I_{r0} = ripple current at 100 Hz and 85 °C.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{rmax}^2$$

I_{rmax} = maximum ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$ = multiplying factor at a same frequency.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting.

If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current 5 min after application
of the rated voltage at $T_{amb} = 20^{\circ}\text{C}$

see Table 2 (0,05 CU or $5 \mu\text{A}$ for $CU \leq 1000 \mu\text{C}$;
 $0,03 CU + 20 \mu\text{A}$ for $CU > 1000 \mu\text{C}$)

Leakage current during continuous operation at U_R ,
at $T_{amb} = 20^{\circ}\text{C}$
at $T_{amb} = 85^{\circ}\text{C}$

approx. $0,2 \times$ values of Table 2
 \leq values of Table 2

If the leakage current is too high, owing to prolonged storage and/or storage at an excessive temperature ($> 40^{\circ}\text{C}$), application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Equivalent series resistance (ESR)

ESR at 100 Hz and $T_{amb} = 20^{\circ}\text{C}$

see Table 2

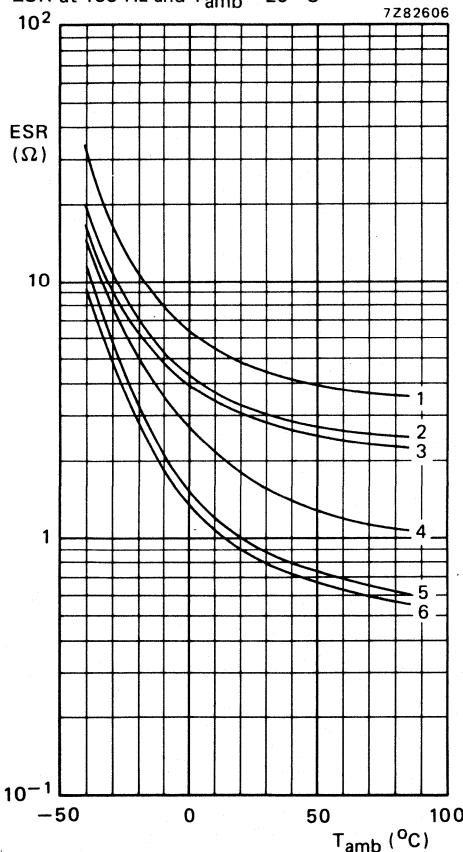


Fig. 6 Typical ESR as a function of ambient temperature at 100 Hz.

curve 1 = case size 3/63 V; curve 2 = case size 4/63V;
curve 3 = case size 5a/63 V; curve 4 = case size 3/4 V;
curve 5 = case size 4/4V; curve 6 = case size 5a/4 V.

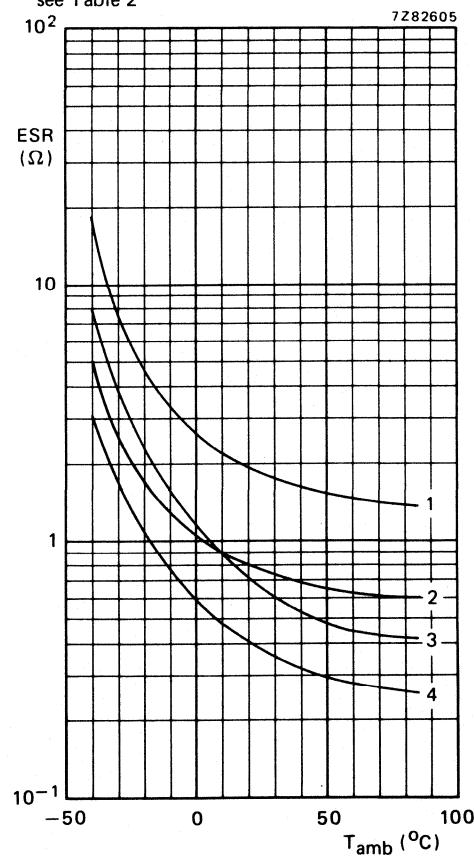
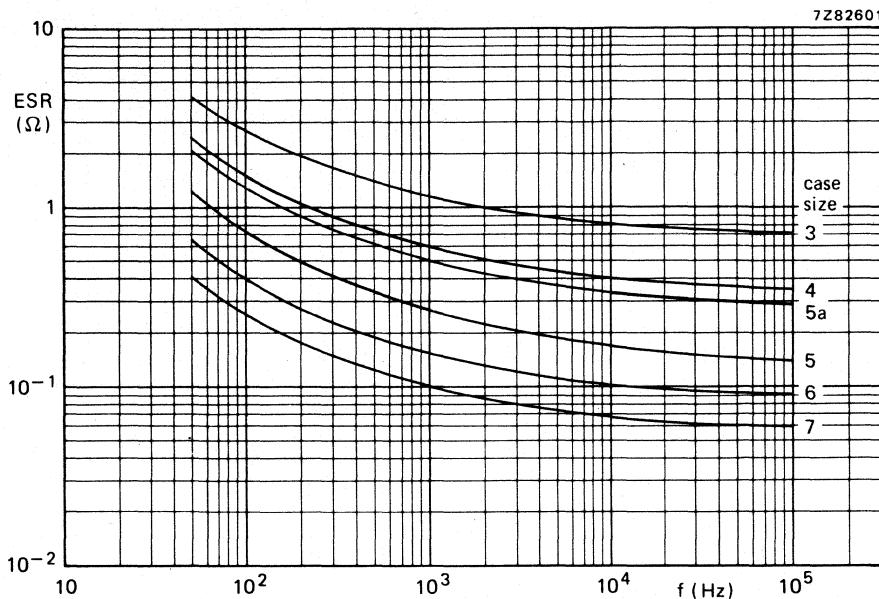


Fig. 7 Typical ESR as a function of ambient temperature at 100 Hz.

curve 1 = case size 5/63 V; curve 2 = case size 6/63 V;
curve 3 = case size 5/4 V; curve 4 = case size 7/63 V.

Fig. 8 Typical ESR as a function of frequency at 20 °C; $U_R = 40$ V.**Tan δ (dissipation factor)**

Maximum $\tan \delta$ at 100 Hz and $T_{amb} = 20$ °C, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Impedance

Maximum impedance at 10 kHz and $T_{amb} = 20$ °C, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

$$z = Z \times C_{nom}$$

see Table 4

Table 4

T_{amb}	$z = Z \times C_{nom}$ ($\Omega \mu F$) at U_R							
	4 V	6,3 V	10 V	16 V	25 V	40 V	63 V	100 V
+ 20 °C		200	160	120	90	70	55	45
- 25 °C		1200	750	560	400	300	180	130
- 40 °C		3200	2000	1500	1100	900	500	350

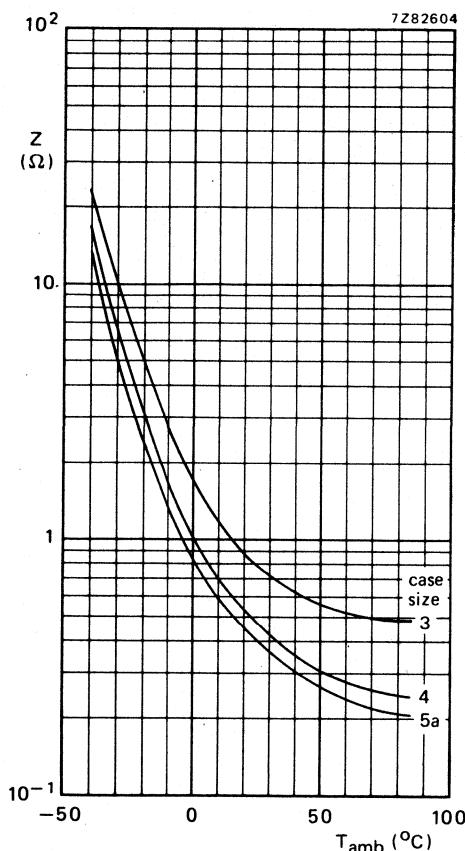


Fig. 9 Typical impedance as a function of ambient temperature at 10 kHz; $U_R = 16$ V.

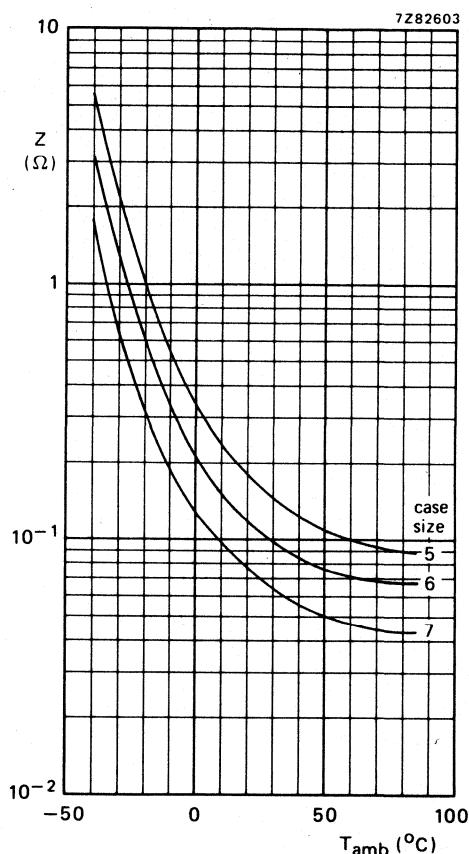
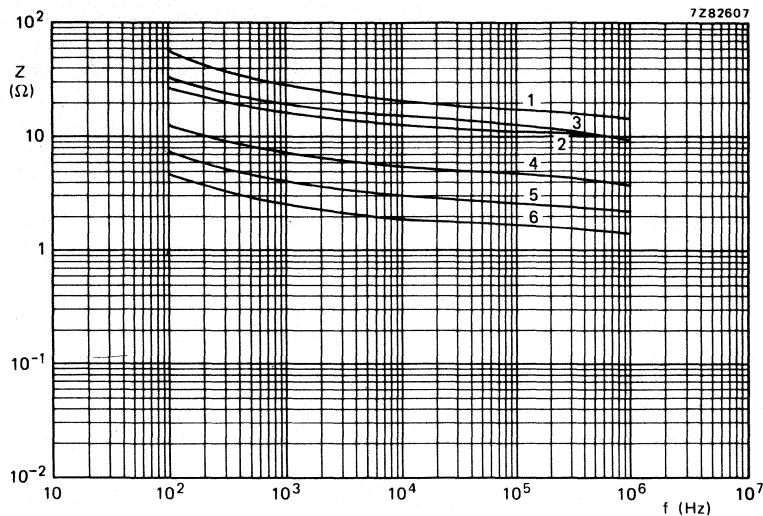
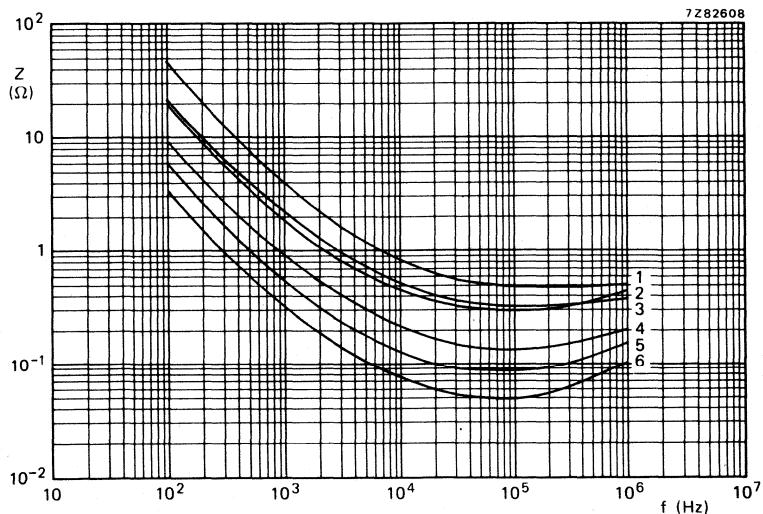


Fig. 10 Typical impedance as a function of ambient temperature at 10 kHz; $U_R = 16$ V.

Fig. 11 Typical impedance as a function of frequency at -40 °C; $U_R = 16$ V.curve 1 = $33 \mu F$, case size 3;curve 2 = $68 \mu F$, case size 5a;curve 3 = $68 \mu F$, case size 4;curve 4 = $150 \mu F$, case size 5;curve 5 = $220 \mu F$, case size 6;curve 6 = $330 \mu F$, case size 7.Fig. 12 Typical impedance as a function of frequency at 20 °C; $U_R = 16$ V.curve 1 = $33 \mu F$, case size 3;curve 2 = $68 \mu F$, case size 5a;curve 3 = $68 \mu F$, case size 4;curve 4 = $150 \mu F$, case size 5;curve 5 = $220 \mu F$, case size 6;curve 6 = $330 \mu F$, case size 7.

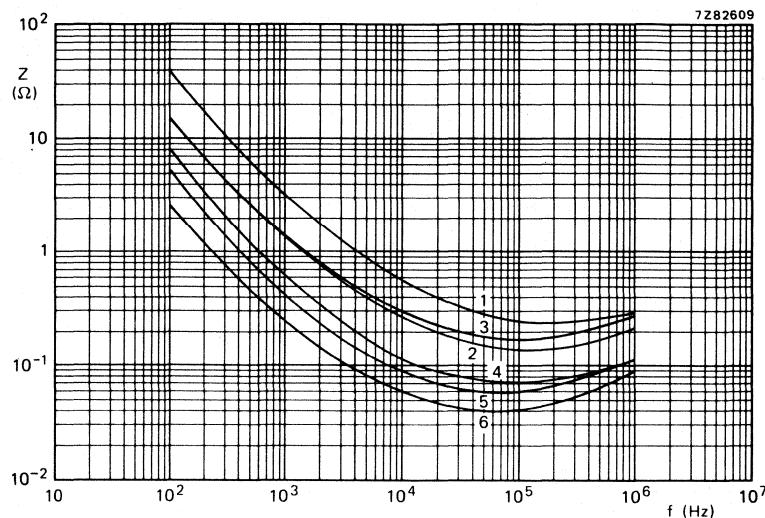


Fig. 13 Typical impedance as a function of frequency at 85 °C; $U_R = 16$ V.

curve 1 = 33 μ F, case size 3;
 curve 2 = 68 μ F, case size 5a;
 curve 3 = 68 μ F, case size 4;
 curve 4 = 150 μ F, case size 5;
 curve 5 = 220 μ F, case size 6;
 curve 6 = 330 μ F, case size 7.

OPERATIONAL DATA

Category temperature range

-40 to +85 °C

PACKING

Capacitors of style 1 are supplied on bandoliers in boxes or on reels; capacitors of styles 2 and 3 are supplied in boxes. The number per box or per reel is given in Table 5.

Table 5

case size	number of capacitors		
	style 1 per reel	style 1 per box	styles 2 and 3 per box
3	1000	1000	1000 (only style 3)
4	1000	1000	1000
5a	500	500	1000 (only style 3)
5	500	500	1000
6	500	500	1000
7	500	500	500

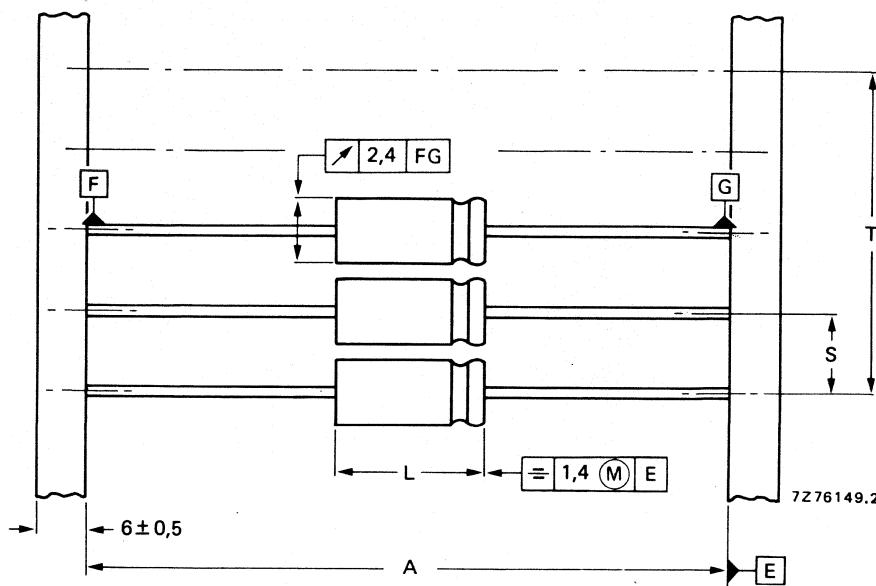


Fig. 14 Style 1 capacitors on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 6 for dimensions A, S, T and L.

Table 6; dimensions in mm

case size	A	S	T for number (n) of capacitors		L _{max}
			n < 50	50 < n < 100	
3	63,5 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	10,5
5a	63,5 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	11,5
4	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
5	73 ± 1,6	10 ± 0,4	10 (n-1) ± 2	10 (n-1) ± 4	18,5
6	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	18,5
7	73 ± 1,6	15 ± 0,75	15 (n-1) ± 2	15 (n-1) ± 4	25,0

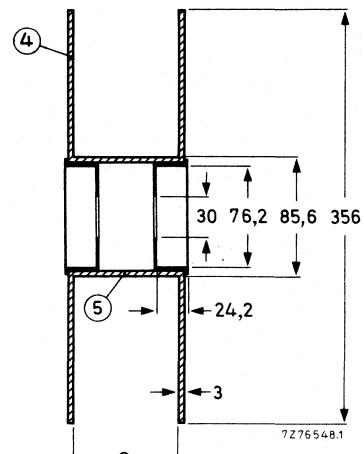
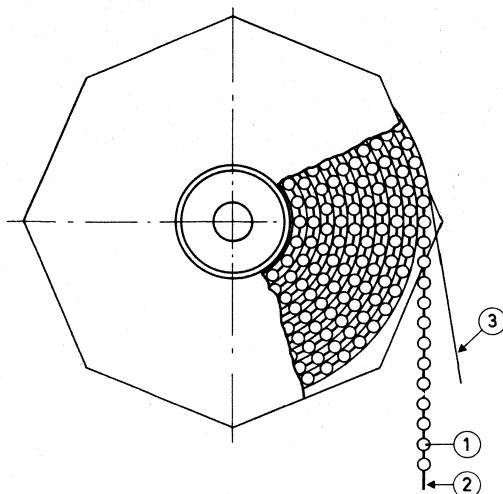


Fig. 15 Style 1 capacitors on bandoliers on reel; dimension C is 84,5 mm for case sizes 3 and 5a, and 88,0 mm for case sizes 4, 5, 6 and 7, the overall width of the reel is 94,5 mm and 99,5 mm respectively.

- | | |
|---------------|--------------|
| 1 = capacitor | 4 = flange |
| 2 = bandolier | 5 = cylinder |
| 3 = paper | |


TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 015 and 2222 016 belong to the miniature types, long-life grade.

ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type
- Long life
- Industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	680 to 33 000 μF
Tolerance on nominal capacitance	-10 to + 50%
Rated voltage range, U_R (R5 series)	6,3 to 63 V
Category temperature range	-40 to + 85 °C
Typical life time	> 5000 h at 85 °C
Basic specification	IEC 384-4, long-life grade DIN 41238 (only version with printed-wiring pins)
Climatic category, IEC 68	40/085/56
Approval	U.K. Post Office D2186 (only version with solder tags)

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μF	U_R (V)					
	6,3	10	16	25	40	63
680						5
1000					5	6
1500						7/8a
2200				5	6	8/9a
3300			5	6	7/8a	9
4700		5	6	7/8a	8/9a	10
6800		6	7/8a	8/9a	9	
10 000	6	7/8a	8/9a	9	10	
15 000	8a	8/9a	9	10		
22 000	9a		10			
33 000	9	10				

nominal dimensions (mm)		
case size	versions with solder tags	versions with printed-wiring pins
5	ϕ 21 x 50	
6	ϕ 25 x 50	ϕ 25 x 55,5
7	ϕ 25 x 80	
8a	ϕ 30 x 50	ϕ 30 x 55,8
8	ϕ 30 x 80	ϕ 30 x 84,7
9a	ϕ 35 x 50	ϕ 35 x 55,8
9	ϕ 35 x 80	ϕ 35 x 84,7
10	ϕ 40 x 80	ϕ 40 x 84,7

APPLICATION

Especially for smoothing and decoupling purposes in industrial power supplies, where a long life and high ripple currents are required and also for coupling purposes in audio power circuits.


DESCRIPTION

The capacitor winding is housed in an aluminium case, sealed with a rubber-faced paper laminate disc. The electrolyte used is of a special composition to ensure good characteristics at high and low temperatures. The case, which has no electrical function, is covered with a blue synthetic sleeve. The capacitors are available with solder tags or with printed-wiring pins. Each capacitor is provided with a safety vent to release gas pressure under overload conditions.

MECHANICAL DATA

Capacitors with solder tags

Dimensions in mm

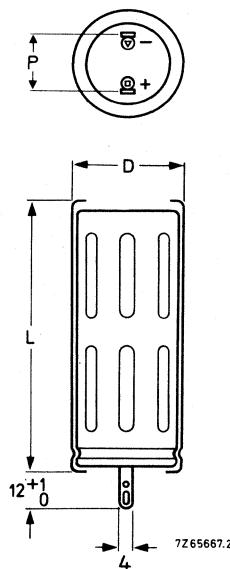



See Table 1 for dimensions D, L and P.

→ Table 1



case size	D	L	P*	mass approx. g
5	21	50	13	20
6	25	50	13	30
7	25	80	13	45
8a	30	50	19	40
8	30	80	19	70
9a	35	50	19	60
9	35	80	19	100
10	40	80	19	130

* P at emergence of terminals.

Capacitors with printed-wiring pins



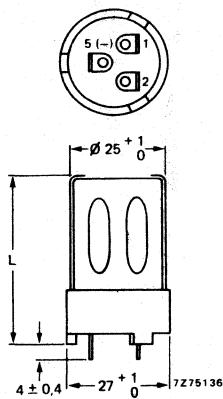
Piercing diagram viewed
from component side.

case size	L	mass approx. g
6	55,5 ± 0,8	30

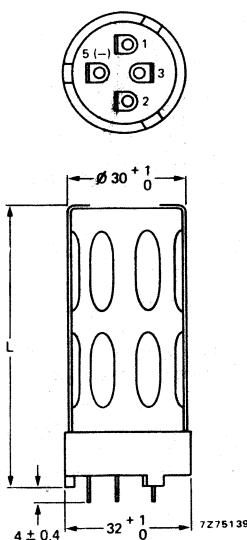Piercing diagram viewed
from component side.


case size	L	mass approx. g
8a 8	$55,8 \left. \right\} \pm 0,8$ $84,7$	40 70

2222 071
2222 073

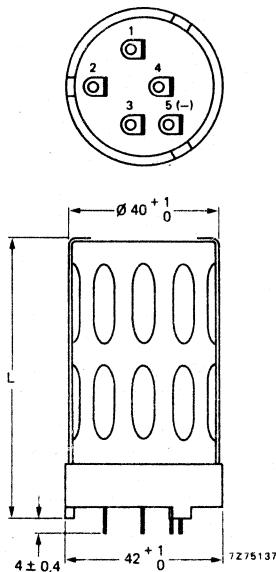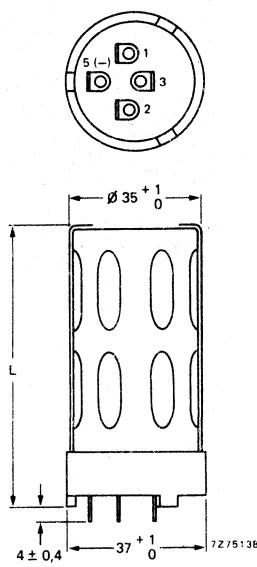

Piercing diagram viewed
from component side.

case size	L	mass approx. g
9a	55,8	60
9	84,7	100

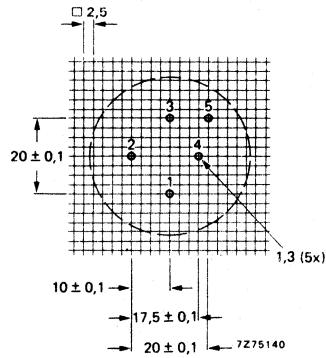

Piercing diagram viewed
from component side.

case size	L	mass approx. g
10	84,7 ± 0,8	130

Marking

The capacitors are marked with: nominal capacitance, tolerance on capacitance, rated voltage, temperature range, IEC type, max. permissible ripple current at $T_{amb} = 50^{\circ}\text{C}$, catalogue number and date code.

The terminals are marked as shown in the dimensional figures; the negative terminal is also indicated by a hole in the insulation sleeve.

Mounting

The capacitors may be mounted in any position with or without a mounting clamp. When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied. The uninsulated part of the case may only touch objects with the same potential as the negative terminal. See also mounting accessories.

Minimum atmospheric pressure

8,5 kPa



ELECTRICAL DATA

→ Table 2a Capacitors with solder tags

Unless otherwise specified all electrical values in Table 2a apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nominal capacitance	max. r.m.s. ripple current at $T_{amb} = 85^\circ C$	max. leakage current at U_R after 5 min	max. $\tan \delta^*$	maximum impedance at 100 kHz	case size	catalogue number
V	μF^*	A*	μA^*		$m\Omega^*$		
6,3	10000	1,8	380	0,50	60	6	2222 071 13103
	15000	2,5	570	0,50	50	8a	073 13153
	33000	4,9	1250	0,50	25	9	071 13333
10	4700	1,1	280	0,35	80	5	071 14472
	6800	1,8	410	0,35	60	6	071 14682
	10000	2,7	600	0,35	50	7	071 14103
	10000	2,4	600	0,35	50	8a	073 14103
	15000	3,7	900	0,35	50	8	071 14153
	33000	6,0	1980	0,35	25	10	071 14333
16	3300	1,1	320	0,25	80	5	071 15332
	4700	1,7	450	0,25	60	6	071 15472
	6800	2,6	655	0,25	50	7	071 15682
	6800	2,4	655	0,25	50	8a	073 15682
	10000	3,5	960	0,25	50	8	071 15103
	10000	3,2	960	0,25	30	9a	073 15103
	15000	4,7	1440	0,25	25	9	071 15153
	22000	6,1	2120	0,25	25	10	071 15223
25	2200	1,0	330	0,20	80	5	071 16222
	3300	1,7	495	0,20	60	6	071 16332
	4700	2,4	705	0,20	50	7	071 16472
	4700	2,2	705	0,20	50	8a	073 16472
	6800	3,3	1020	0,20	50	8	071 16682
	6800	2,9	1020	0,20	30	9a	073 16682
	10000	4,3	1500	0,20	25	9	071 16103
	15000	5,7	2250	0,20	25	10	071 16153
40	1000	1,0	240	0,15	125	5	071 17102
	2200	1,3	530	0,15	100	6	071 17222
	3300	2,4	795	0,15	80	7	071 17332
	3300	1,7	795	0,15	80	8a	073 17332
	4700	3,1	1130	0,15	80	8	071 17472
	4700	2,4	1130	0,15	50	9a	073 17472
	6800	4,1	1640	0,15	40	9	071 17682
	10000	5,3	2400	0,15	40	10	071 17103
63	680	0,8	260	0,10	125	5	071 18681
	1000	1,3	380	0,10	100	6	071 18102
	1500	2,0	570	0,10	80	7	071 18152
	1500	1,7	570	0,10	80	8a	073 18152
	2200	2,6	835	0,10	80	8	071 18222
	2200	2,4	835	0,10	50	9a	073 18222
	3300	3,5	1250	0,10	40	9	071 18332
	4700	4,5	1780	0,10	40	10	071 18472

* See also corresponding paragraph.

Table 2b Capacitors with printed-wiring pins

Unless otherwise specified all electrical values in Table 2b apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

U_R	nominal capacitance	max. r.m.s. ripple current at $T_{amb} = 85^\circ\text{C}$	max. leakage current at U_R after 5 min	max. $\tan \delta^*$	maximum impedance at 100 kHz	case size	catalogue number
V	μF^*	A*	μA^*		$\text{m}\Omega^*$		
6,3	10000	1,8	380	0,50	60	6	2222 071 53103
	15000	2,5	570	0,50	50	8a	073 53153
	22000	3,3	840	0,50	30	9a	073 53223
10	6800	1,8	410	0,35	60	6	071 54682
	15000	3,3	900	0,35	30	9a	073 54153
	33000	6,0	1980	0,35	25	10	071 54333
16	4700	1,7	450	0,25	60	6	071 55472
	6800	2,4	655	0,25	50	8a	073 55682
	10000	3,5	960	0,25	50	8	071 55103
25	3300	1,7	495	0,20	60	6	071 56332
	4700	2,2	705	0,20	50	8a	073 56472
	6800	2,9	1020	0,20	30	9a	073 56682
	10000	4,3	1500	0,20	25	9	071 56103
40	2200	1,3	530	0,15	100	6	071 57222
	3300	1,7	795	0,15	80	8a	073 57332
	4700	3,1	1130	0,15	80	8	071 57472
	4700	2,4	1130	0,15	50	9a	073 57472
	6800	4,1	1640	0,15	40	9	071 57682
	10000	5,3	2400	0,15	40	10	071 57103
63	1000	1,3	380	0,10	100	6	071 58102
	1500	1,7	570	0,10	80	8a	073 58152
	2200	2,4	835	0,10	50	9a	073 58222
	4700	4,5	1780	0,10	40	10	071 58472

* See also corresponding paragraph.


Capacitance

Nominal capacitance values at 100 Hz and 20 °C

see Table 2a or 2b

Tolerance on nominal capacitance at 100 Hz

-10 to + 50%

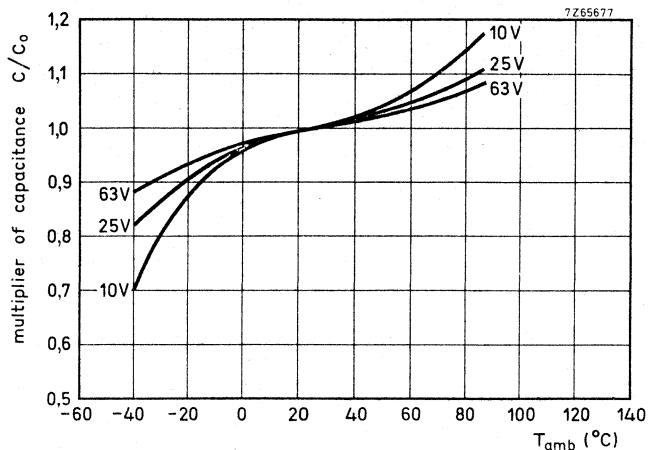

Typical capacitance as a function of ambient temperature C_0 = capacitance at 25 °C, 100 Hz.

Voltage

Rated voltage	= maximum permissible voltage at < 40 °C at 40 °C up to 85 °C	$1,1 \times U_R$ U_R
Ripple voltage*	= maximum permissible a.c. voltage providing the following three conditions are met: a) max. (d.c. + peak a.c.) voltage b) max. peak a.c. voltage with d.c. voltage applied c) max. peak a.c. voltage without d.c. voltage applied	< 40 °C 40 °C up to 85 °C $\leq 1,1 \times U_R$ $\leq U_R$ \leq applied d.c. voltage + 1 V
Surge voltage	= maximum permissible voltage for short periods (see also "Tests and requirements")	1 V
Reverse voltage	= maximum d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods	$1,15 \times U_R$ 1 V

* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current

Maximum permissible r.m.s. ripple current at 100 Hz and

 $T_{amb} = 85^{\circ}\text{C}$

see Table 2a or 2b

at $T_{amb} = 80^{\circ}\text{C}$


1,4 x values of Table 2a and 2b

at $T_{amb} = 75^{\circ}\text{C}$

1,7 x values of Table 2a and 2b

at $T_{amb} \leq 65^{\circ}\text{C}$

2,2 x values of Table 2a and 2b

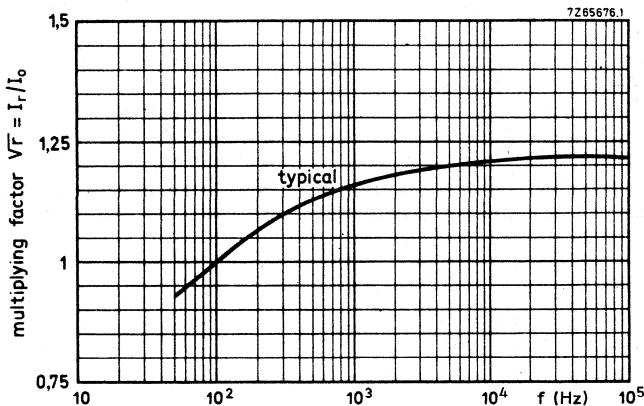

Multiplying factor as a function of frequency, for calculation of maximum ripple current.
 I_0 = maximum ripple current at 85°C , 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r\max}^2$$

$I_{r\max}$ = maximum ripple current at 100 Hz and applicable ambient temperature

I_n = ripple current at a certain frequency

$\sqrt{r_n}$ = multiplying factor at a same frequency

Note

These ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.



Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting.

If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current 5 min. after application

of the rated voltage at $T_{amb} = 20^{\circ}\text{C}$

see Table 2a or 2b (0,006 CU + 4 μA)

Leakage current during continuous operation at U_R ,

at $T_{amb} = 20^{\circ}\text{C}$

approx. 0,2 of value

stated in Table 2a or 2b

\leq value stated in Table 2a or 2b

at $T_{amb} = 85^{\circ}\text{C}$

If owing to prolonged storage and/or storage at an excessive temperature the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Tan δ (dissipation factor)


Tan δ at 100 Hz and 20°C , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2a or 2b

Impedance


Impedance at 100 kHz and $T_{amb} = 20^{\circ}\text{C}$, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2a or 2b

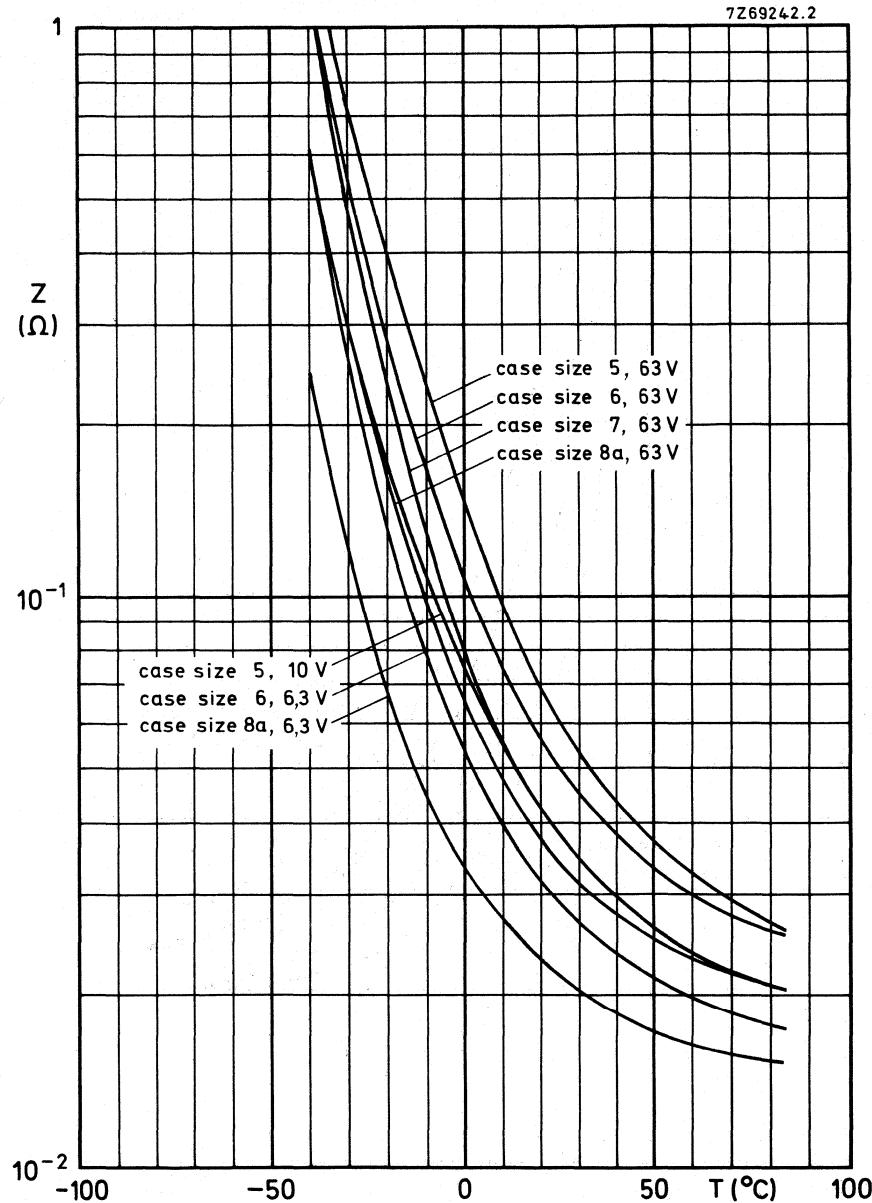



Typical impedance as a function of temperature at 100 kHz.

7Z69241.1

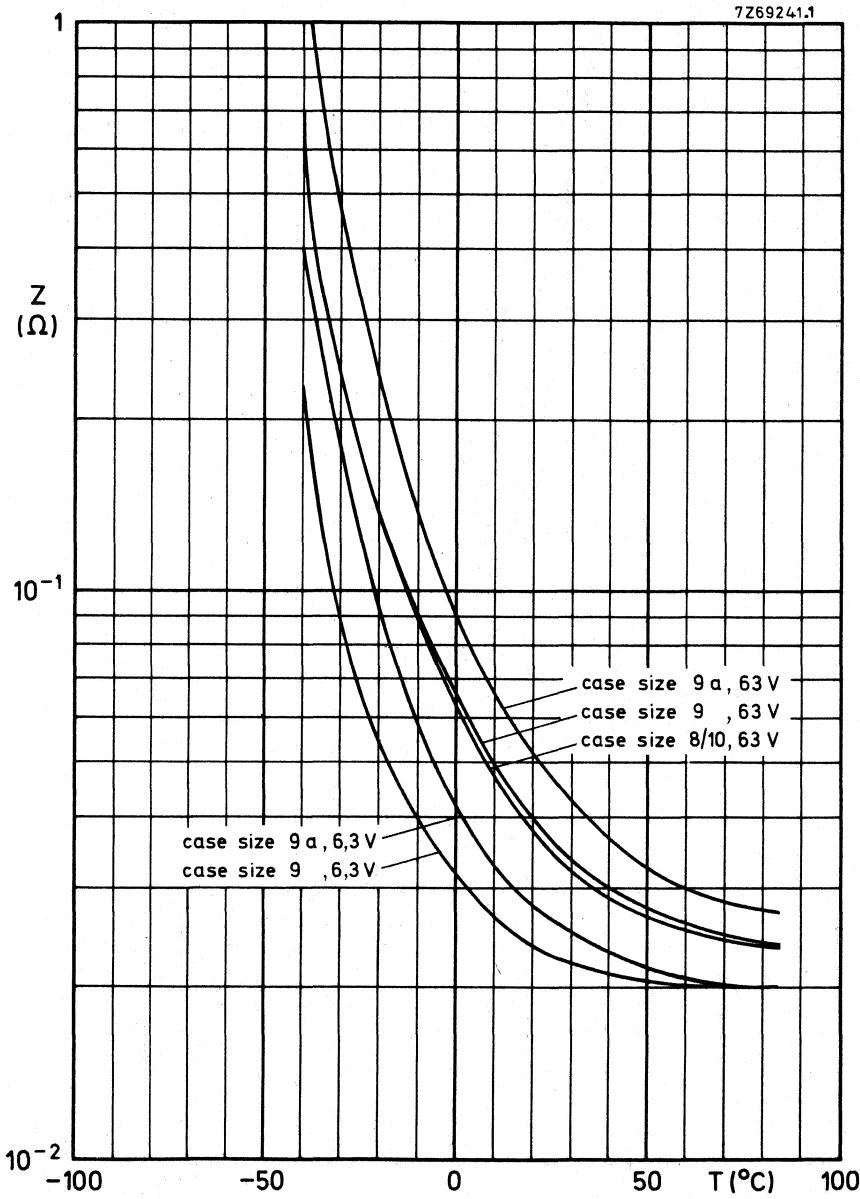

Typical impedance as a function of temperature at 100 kHz.



Typical impedance as a function of frequency at different voltages and $T_{amb} = + 20^{\circ}\text{C}$.

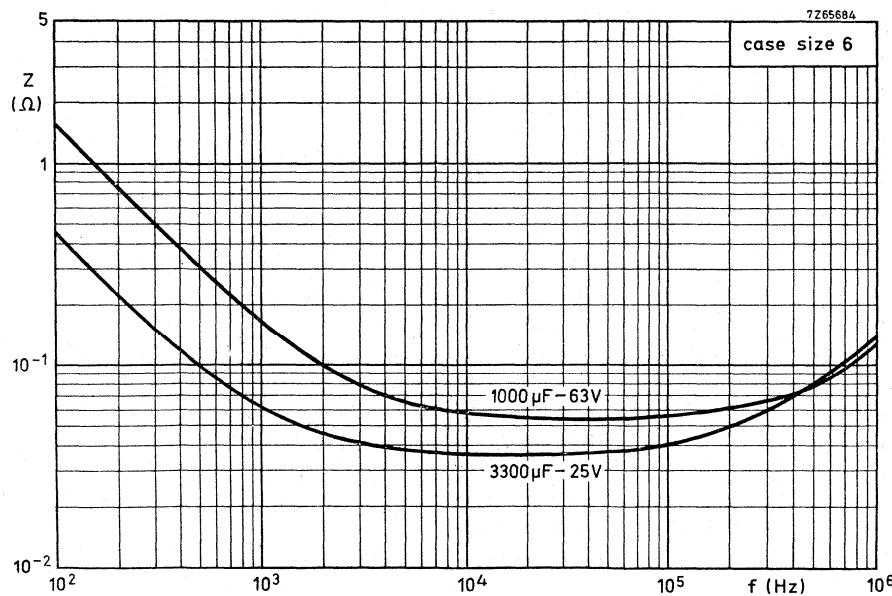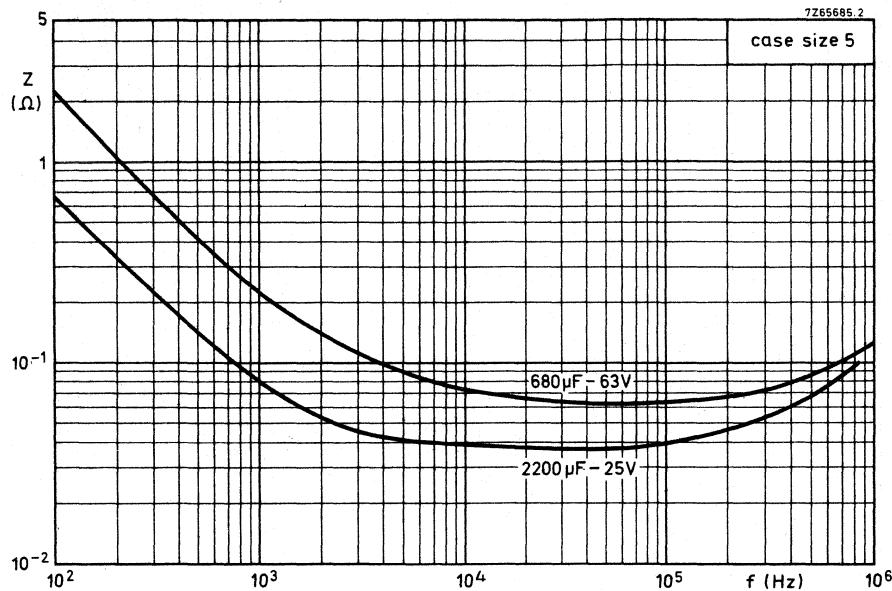



2222 071

2222 073

Typical impedance as a function of frequency at different voltages and $T_{amb} = +20^{\circ}\text{C}$.

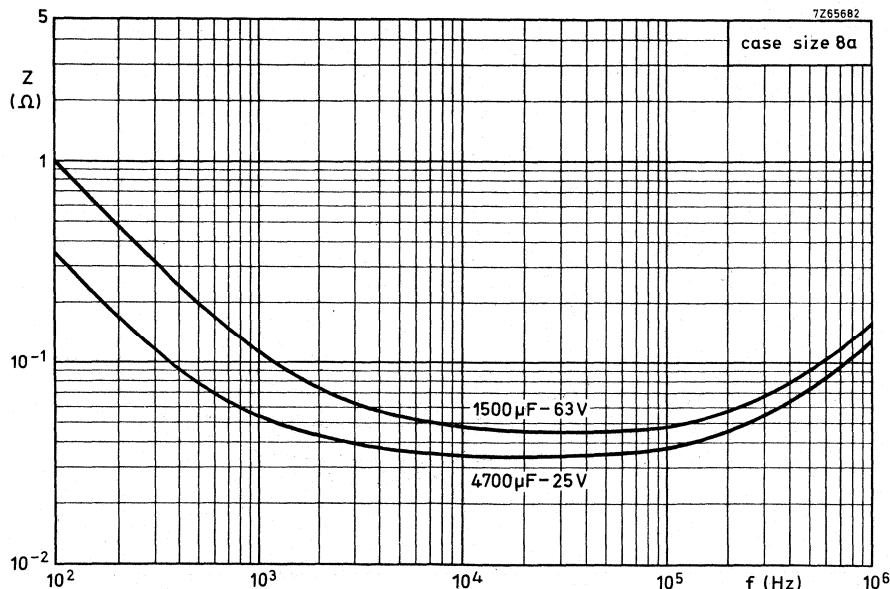
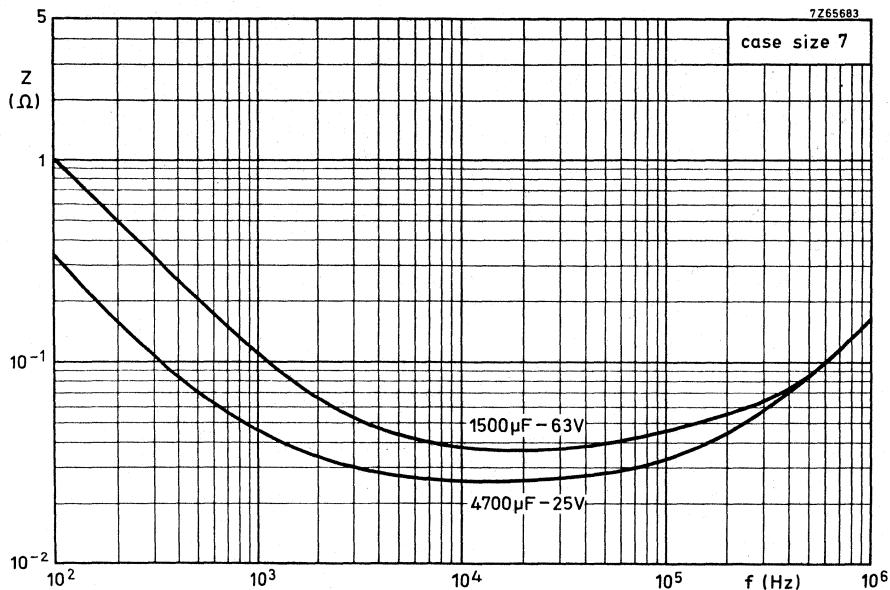


Typical impedance as a function of frequency at different voltages and $T_{amb} = + 20^{\circ}\text{C}$.

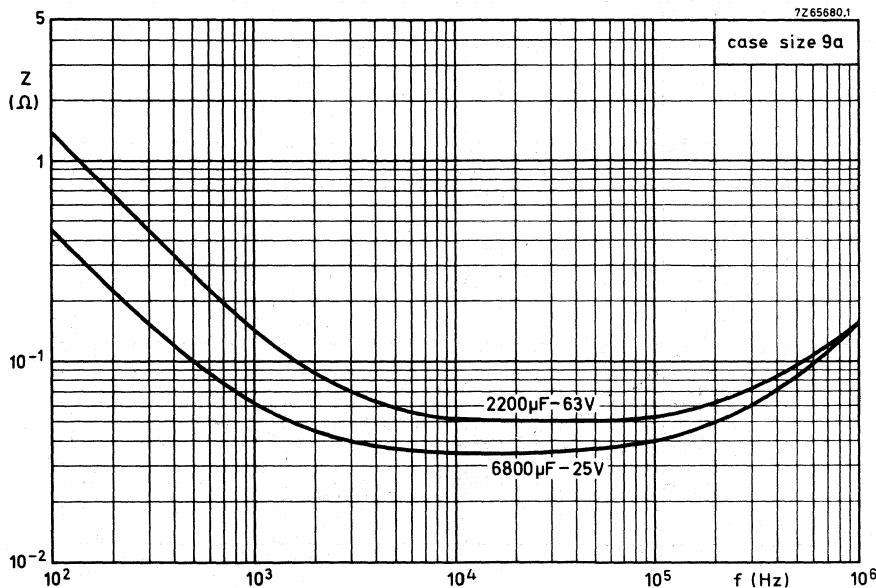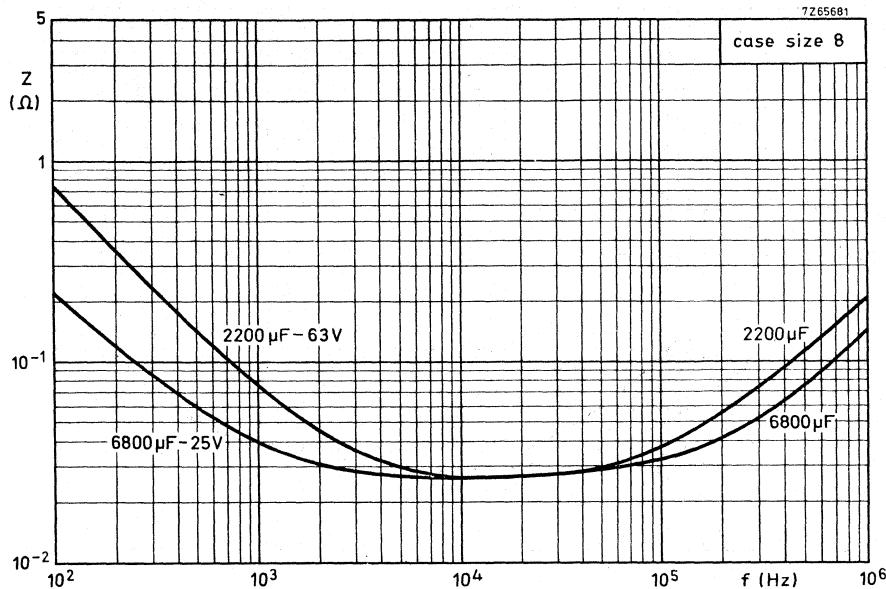

2222 071
2222 073

Typical impedance as a function of frequency at different voltages and $T_{amb} = + 20^{\circ}\text{C}$.

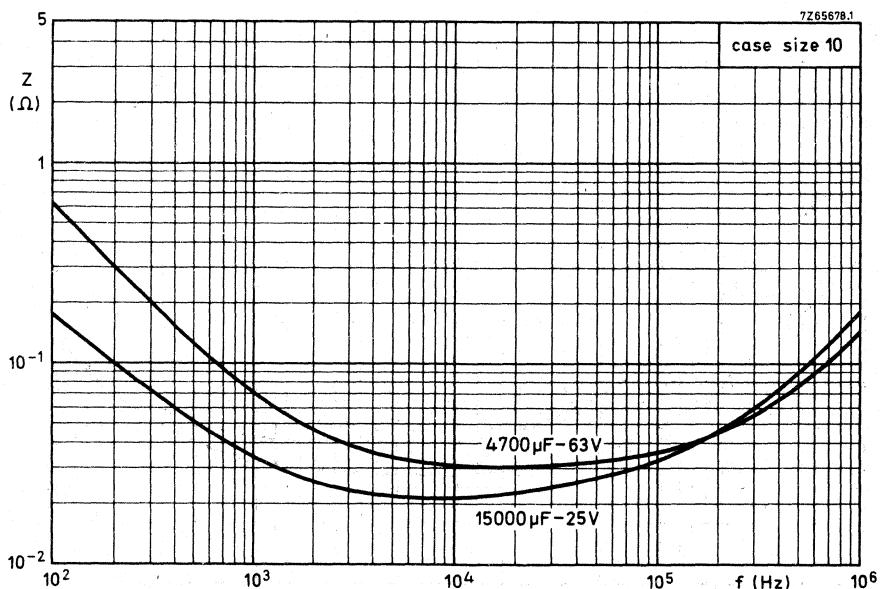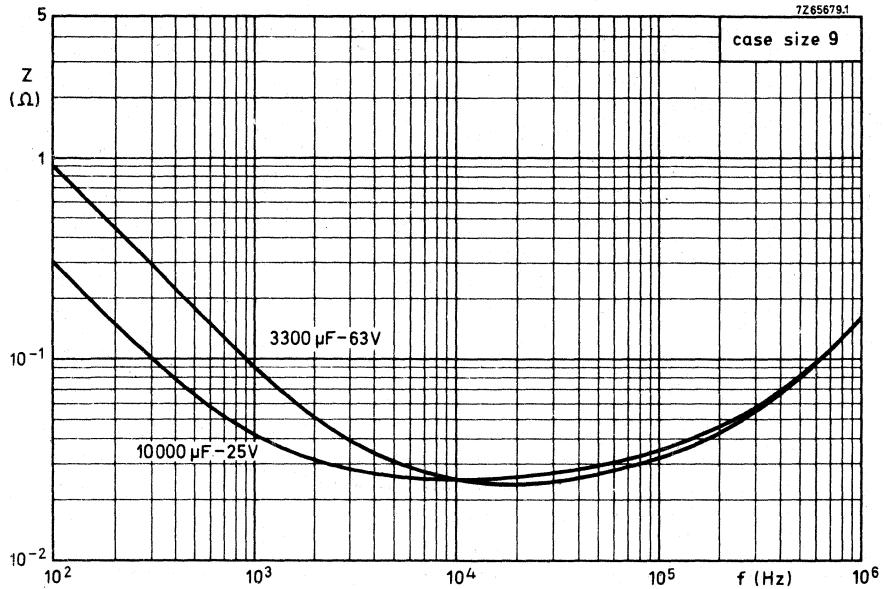

Equivalent series resistance (ESR = $\tan \delta/\omega C$)Tan δ and C at 100 Hz and $T_{amb} = 20^\circ\text{C}$

see Table 2

OPERATIONAL DATA**Category temperature range**For rated voltage -40 to $+85^\circ\text{C}$ **Life expectancy****Typical lifetime**at $T_{amb} = 85^\circ\text{C}$ > 5000 hat $T_{amb} = 25^\circ\text{C}$ > 15 years**PACKING**

100 pieces per box.

TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 071 and 2222 073 are large types, long-life grade.


2222 071
2222 073

MOUNTING ACCESSORIES





Clamps

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slid over the capacitor and then fixed to it with a nut and bolt. They are provided with two mounting lugs.

Five types are available, one for each case diameter of the capacitor range. They are delivered without nuts or bolts.



For case size 5.

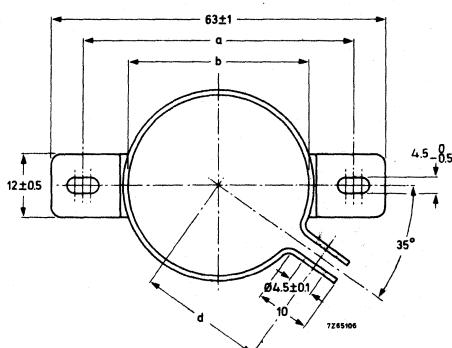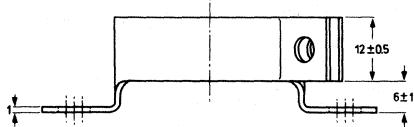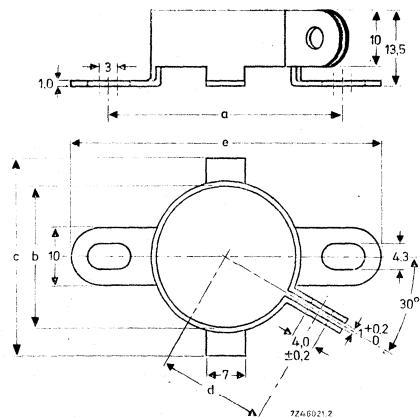


For case sizes 6, 7, 8, 8a and 10.

For case sizes 9 and 9a.

case size	dimensions in mm					catalogue number
	a	b	c	d	e	
5	37,0 ± 0,2	21	—	15,5	49	4322 043 03291
6, 7	41,5 ± 0,2	25	35	18,5	56	03301
8, 8a	46,5 ± 0,2	30	40	21	61	03311
9, 9a	51,5 ± 0,2	35	—	23,5	63	04272
10	56,5 ± 0,2	40	50	26	71	03331

ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with screw terminals
- Long life
- Military and industrial applications



QUICK REFERENCE DATA

Nominal capacitance range (E6 series)	1500 to 150 000 μ F
Tolerance on nominal capacitance	-10 to +50%
Rated voltage range, U_R (R5 series)	6,3 to 100 V
Category temperature range	
2222 106	-40 to +85 °C
2222 107	-25 to +85 °C
Typical life time at 85 °C	>5000 h
Basic specification	IEC 384-4, long-life grade
Climatic category	
IEC 68	40/085/56
DIN 40040	GPF (56 days)
NF C93-001	554
IEC 68	25/085/56
DIN 40040	GPF (56 days)
NF C93-001	654
Approvals	U.K. Post Office D 2186 Ministry of Defence (Navy) DEF5134-1 FOA/FTL (Sweden)

Selection chart for C_{nom} - U_R and relevant case sizes.

C_{nom} μ F	U_R (V)						
	6,3	10	16	25	40	63	100
1500							11
2200						11	12
3300						12	14
4700					11	14	15
6800				11	12	15	
10 000			11	12	14		16
15 000		11	12	14	15	16	
22 000	11	12	14	15			
33 000	12	14	15		16		
47 000	14	15		16			
68 000	15		16				
100 000		16					
150 000	16						

case size	nominal dimensions (mm)
11	\varnothing 35 x 80
12	\varnothing 35 x 112
14	\varnothing 50 x 80
15	\varnothing 50 x 112
16	\varnothing 65 x 112

APPLICATION

Because of their high reliability and long service life these capacitors are recommended not only for industrial but also for military applications. Their extremely low resistance and inductance values and high resistance to shock and vibration render them very suitable for applications such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.

DESCRIPTION

The low values of impedance and inductance are achieved by a special construction with multiple internal anode and cathode connections.

The high resistance to shock and vibration is achieved by the longitudinal rills and special internal construction.


The capacitors are completely cold-welded and charge/discharge proof.

The aluminium cases are fully insulated and sealed by a synthetic resin disc with a vent. In the case of over-pressure the vent releases this pressure and closes again; the proper operation of the capacitor remains guaranteed.

The capacitors are delivered with screws and washers.

MECHANICAL DATA

Dimensions in mm

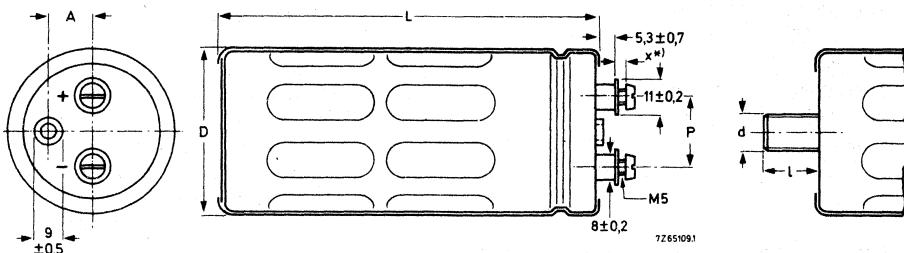

See Table 1 for dimensions D, L, P and A.

*^o) Maximum permissible torque which may be applied to the termination screws at various heights (X in drawing):

2	4	6	X (mm)
1,5	1	0,5	max. permissible torque (Nm)

Table 1

case size	D + 1,5	L + 3	P ± 0,1	A ± 0,2	d x l	approx. mass (g)
11	35	80	15	8,4	M8 x 12	105
12	35	112	15	8,4	M8 x 12	140
14	50	80	22	14,3	M12 x 16	200
15	50	112	22	14,3	M12 x 16	280
16	65	112	31	19,0	M12 x 16	480

Marking

The capacitors are marked with: nominal capacitance, tolerance on nominal capacitance, rated voltage, temperature range, IEC type, maximum permissible ripple current at 50 °C, catalogue number and date code.

Mounting

The capacitor may be mounted upright or lying down, with or without mounting clamp. To ensure good working of the vent, this device should be on the upper side when the capacitor is mounted lying down. When a number of capacitors are connected to form a capacitor bank, the proximity to one another must not be less than 15 mm when no de-rating of ripple current and/or temperature is applied.

See also mounting accessories.

Minimum atmospheric pressure

8,5 kPa



ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.


U _R (V)	nom. cap. (μF)	max. r. m. s. ripple cur - rent at T _{amb} = 85 °C (A) ¹⁾	max. leakage current at U _R after 5 min (mA) ¹⁾	typ. ESR (mΩ) ¹⁾	max. tan δ 1)	impedance at 20 kHz (mΩ) ¹⁾		case size	catalogue number 2)
						typ.	max.		
6, 3	22000	5, 5	0, 9	13, 0	0, 32	8, 5	13, 0	11	2222 106 33223
	33000	7, 9	1, 3	8, 5	0, 32	7, 0	10, 5	12	33333
	47000	9, 4	1, 8	6, 5	0, 35	5, 5	8, 0	14	33473
	68000	13, 2	2, 6	4, 5	0, 35	4, 0	6, 0	15	33683
	150000	21, 3	5, 7	2, 5	0, 45	3, 5	5, 5	16	33154
10	15000	5, 3	0, 9	14, 0	0, 23	8, 5	13, 0	11	34153
	22000	7, 5	1, 4	9, 5	0, 23	7, 0	10, 5	12	34223
	33000	9, 1	2, 0	7, 0	0, 25	5, 5	8, 0	14	34333
	47000	12, 8	2, 9	5, 0	0, 25	4, 0	6, 0	15	34473
	100000	20, 5	6, 0	2, 5	0, 27	3, 5	5, 5	16	34104
16	10000	5, 0	1, 0	16, 0	0, 16	8, 5	13, 0	11	35103
	15000	7, 1	1, 5	10, 5	0, 16	7, 0	10, 5	12	35153
	22000	8, 6	2, 2	8, 0	0, 18	5, 5	8, 0	14	35223
	33000	12, 4	3, 2	5, 0	0, 18	4, 0	6, 0	15	35333
	68000	19, 7	6, 6	2, 5	0, 19	3, 5	5, 5	16	35683
25	6800	4, 7	1, 1	18, 0	0, 12	8, 5	13, 0	11	36682
	10000	6, 7	1, 5	12, 0	0, 12	7, 0	10, 5	12	36103
	15000	8, 2	2, 3	8, 5	0, 13	5, 5	8, 0	14	36153
	22000	11, 6	3, 3	6, 0	0, 13	4, 0	6, 0	15	36223
	47000	18, 7	7, 1	3, 0	0, 14	3, 5	5, 5	16	36473
40	4700	4, 3	1, 2	21, 0	0, 10	11, 5	17, 0	11	37472
	6800	6, 0	1, 7	14, 5	0, 10	8, 5	13, 0	12	37682
	10000	7, 4	2, 4	10, 5	0, 10	6, 0	9, 0	14	37103
	15000	10, 6	3, 6	7, 0	0, 10	4, 5	7, 0	15	37153
	33000	17, 6	8, 0	3, 5	0, 11	3, 5	5, 5	16	37333
63	2200	3, 6	0, 9	30, 0	0, 065	11, 5	17, 0	11	38222
	3300	5, 2	1, 3	20, 0	0, 065	8, 5	13, 0	12	38332
	4700	6, 3	1, 8	14, 5	0, 070	6, 0	9, 0	14	38472
	6800	8, 8	2, 6	10, 0	0, 070	4, 5	7, 0	15	38682
	15000	14, 8	5, 7	5, 0	0, 075	3, 5	5, 5	16	38153
100	1500	3, 1	0, 9	270	0, 40	200	300	11	2222 107 30152
	2200	4, 5	1, 4	180	0, 40	130	200	12	30222
	3300	5, 4	2, 0	120	0, 40	90	140	14	30332
	4700	7, 7	2, 9	80	0, 40	60	90	15	30472
	10000	12, 6	6, 0	40	0, 40	40	60	16	30103

¹⁾ See also corresponding paragraph.

2) Replace 8th digit by 5 for bolt version.

CapacitanceNominal capacitance values at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$ see Table 2

Tolerance on nominal capacitance at 100 Hz -10 to +50%

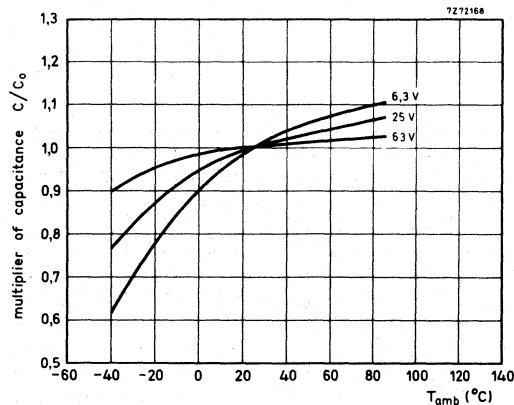

Typical capacitance as a function of ambient temperature;
 C_0 = capacitance at $T_{amb} = 25^{\circ}\text{C}$, 100 Hz.

Voltage

Rated voltage = max. permissible voltage
 at < 40 °C
 at 40 °C up to 85 °C

$1,1 \times U_R$
 U_R

Ripple voltage *) = max. permissible a.c.
 voltage providing the
 following three conditions
 are met:

< 40 °C 40 °C up to 85 °C

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage,
 with d.c. voltage applied
- c) max. peak a.c. voltage,
 without d.c. voltage applied

$\leq 1,1 \times U_R$	$\leq U_R$
-----------------------	------------

\leq applied d.c. voltage + 1 V

1 V

Surge voltage = max. permissible voltage for
 short periods (see also "Tests
 and requirements")

$1,15 \times U_R$

Reverse voltage = max. d.c. voltage applied in
 the reverse polarity at the
 maximum category tempera-
 ture (for short periods)

1 V

*) Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current

Maximum permissible r. m. s. ripple current
at 100 Hz and $T_{amb} = 85^{\circ}\text{C}$

see Table 2

at $T_{amb} = 80^{\circ}\text{C}$


1,4 x values stated in Table 2

at $T_{amb} = 75^{\circ}\text{C}$

1,7 x values stated in Table 2

at $T_{amb} \leq 65^{\circ}\text{C}$

2,2 x values stated in Table 2

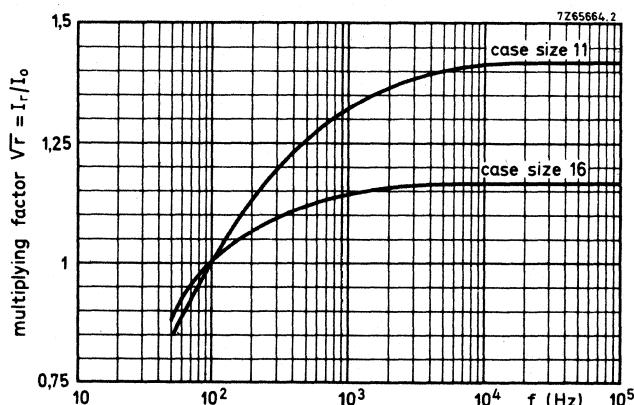

Multiplying factor as a function of frequency, for calculation of max. ripple current ¹⁾.
 I_0 = maximum ripple current at 85°C , 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r^2 \text{ max.}$$

I_r max = max. ripple current at 100 Hz and applicable ambient temperature;

I_n = ripple current at a certain frequency;

$\sqrt{r_n}$ = multiplying factor at same frequency.

Note

Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

¹⁾ With a maximum of 30 A.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting.

If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

Leakage current

Maximum leakage current 5 min after application
of the rated voltage at $T_{amb} = 20^{\circ}\text{C}$

see Table 2 (0,006 CU + 4 μA)

Leakage current during continuous operation at U_R ,
at $T_{amb} = 20^{\circ}\text{C}$

approx. 0,125 of value stated in
Table 2

at $T_{amb} = 85^{\circ}\text{C}$ \leq value stated in Table 2


If owing to prolonged storage and/or storage at an excessive temperature the leakage current is too high, application of the rated voltage for some hours will cause the leakage current to fall to a value lower than specified in Table 2.

Tan δ (dissipation factor)


Tan δ at 100 Hz and $T_{amb} = 25^{\circ}\text{C}$, measured by means
of a four-terminal circuit (Thomson circuit) see Table 2

Impedance


Impedance at 20 kHz and $T_{amb} = 25^{\circ}\text{C}$, measured
by means of a four-terminal circuit (Thomson circuit) see Table 2

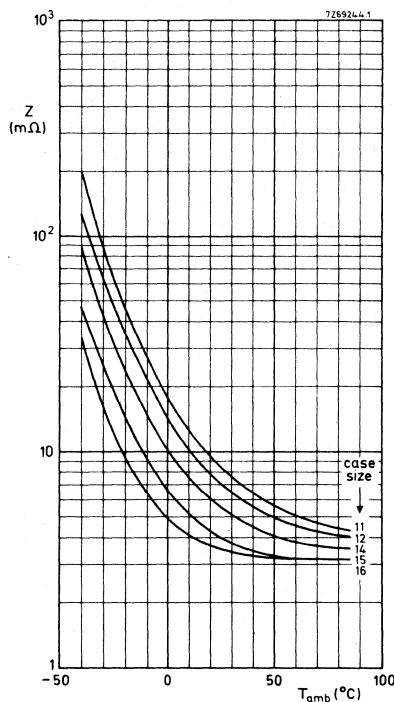

Typical impedance as a function of temperature at 20 kHz for 6,3 V to 25 V types.

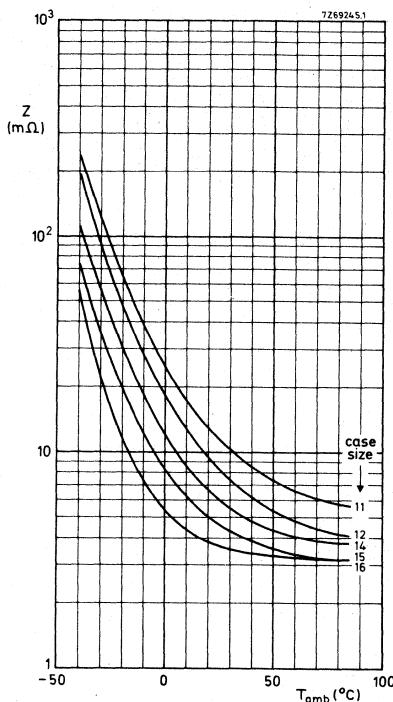


Typical impedance as a function of temperature at 20 kHz for 40 V and 63 V types.

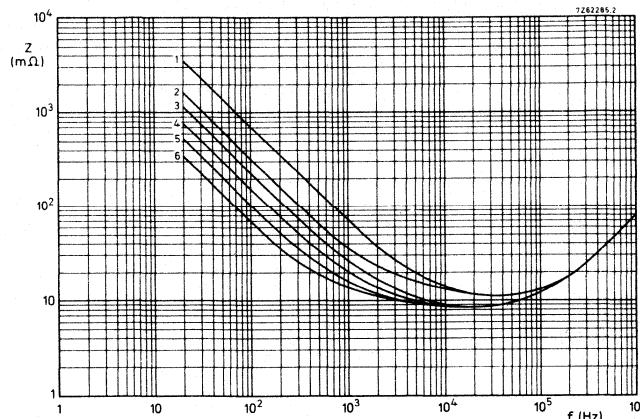

Typical impedance as a function of frequency at $T_{amb} = 25$ °C.

case size 11


- curve 1 = 2200 μ F, 63 V
 2 = 4700 μ F, 40 V
 3 = 6800 μ F, 25 V
 4 = 10 000 μ F, 16 V
 5 = 15 000 μ F, 10 V
 6 = 22 000 μ F, 6, 3 V

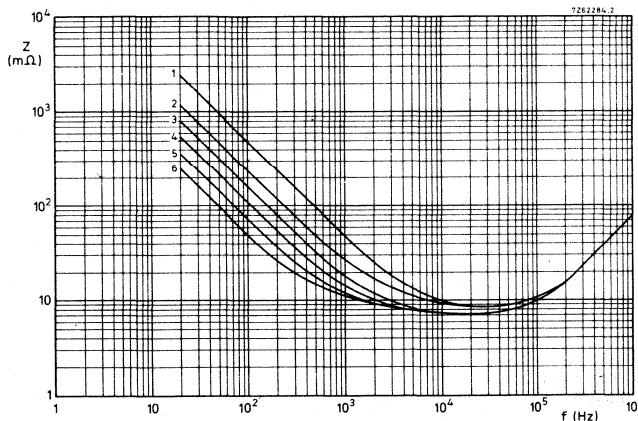

Typical impedance as a function of frequency at $T_{amb} = 25$ °C.

case size 12


- curve 1 = 3300 μ F, 63 V
 2 = 6800 μ F, 40 V
 3 = 10 000 μ F, 25 V
 4 = 15 000 μ F, 16 V
 5 = 22 000 μ F, 10 V
 6 = 33 000 μ F, 6, 3 V

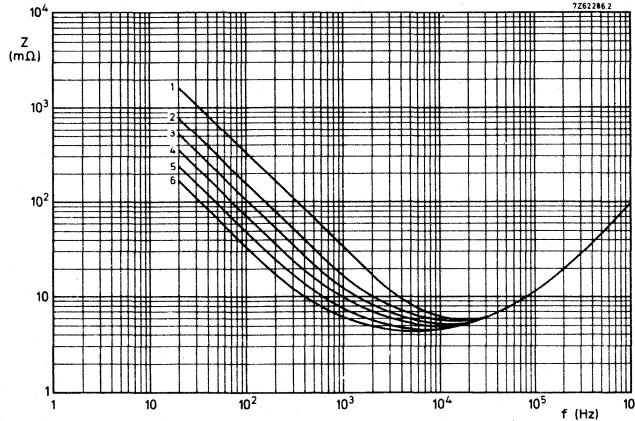

Typical impedance as a function of frequency at $T_{amb} = 25$ °C.

case size 14


- curve 1 = 4700 μ F, 63 V
 2 = 10 000 μ F, 40 V
 3 = 15 000 μ F, 25 V
 4 = 22 000 μ F, 16 V
 5 = 33 000 μ F, 10 V
 6 = 47 000 μ F, 6, 3 V

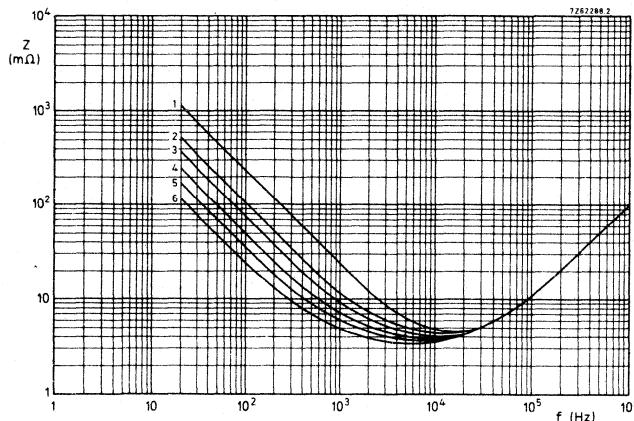

Typical impedance as a function of frequency at $T_{amb} = 25 \text{ } ^\circ\text{C}$.

case size 15

- curve 1 = 6800 μF , 63 V
- 2 = 15 000 μF , 40 V
- 3 = 22 000 μF , 25 V
- 4 = 33 000 μF , 16 V
- 5 = 47 000 μF , 10 V
- 6 = 68 000 μF , 6, 3 V

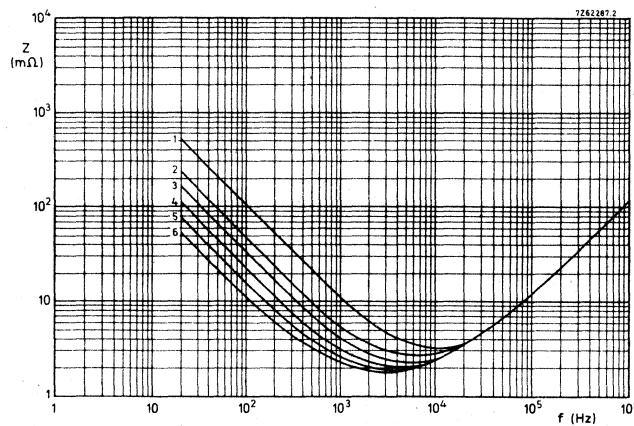

Typical impedance as a function of frequency at $T_{amb} = 25 \text{ } ^\circ\text{C}$.


case size 16

- curve 1 = 15 000 μF , 63 V
- 2 = 33 000 μF , 40 V
- 3 = 47 000 μF , 25 V
- 4 = 68 000 μF , 16 V
- 5 = 100 000 μF , 10 V
- 6 = 150 000 μF , 6, 3 V


Equivalent series resistance (ESR = $\tan \delta / \omega C$)

ESR at 100 Hz and $T_{amb} = 25 \text{ } ^\circ\text{C}$

see Table 2

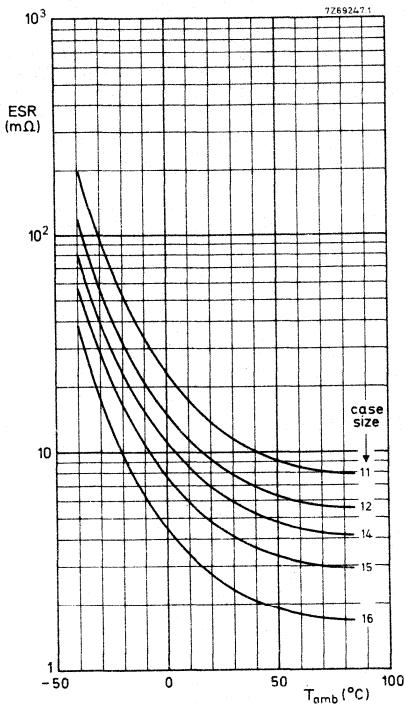

Typical ESR as a function of temperature at 100 Hz for 6.3 V types.

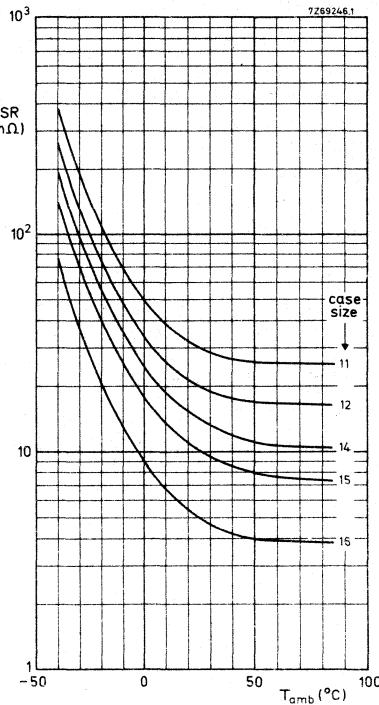

Typical ESR as a function of temperature at 100 Hz for 63 V types.

Inductance

case size	typical inductance
11 and 12	12 nH
14 and 15	15 nH
16	18 nH

2222 106

2222 107

OPERATIONAL DATA

Category temperature range

for rated voltage, 2222 106	-40 to +85 °C
for rated voltage, 2222 107	-25 to +85 °C

Life expectancy

Typical lifetime

at $T_{amb} = 85 \text{ }^{\circ}\text{C}$	>5000 h
at $T_{amb} = 25 \text{ }^{\circ}\text{C}$	>15 years

PACKING

Case sizes 11, 12, 14 and 15: 50 pieces per box.

Case size 16: 25 pieces per box.

TESTS AND REQUIREMENTS


See Introduction, section 9, under aluminium electrolytic capacitors.

Note: Capacitors 2222 106 and 2222 107 belong to the large types with screw terminals, long-life grade.




MOUNTING ACCESSORIES

Clamps

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slid over the capacitor and then fixed to it with a nut and bolt. They are provided with two or three mounting lugs. Three types are available, one for each case diameter of the capacitor range. They are delivered without nuts or bolts.

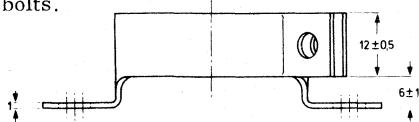

Clamp for case diameter of 35 mm.
Catalogue number : 4322 043 04272.

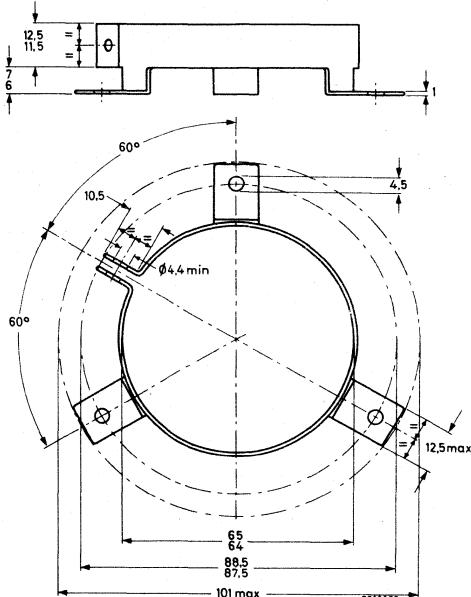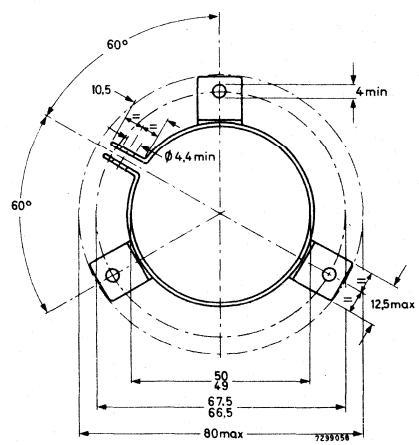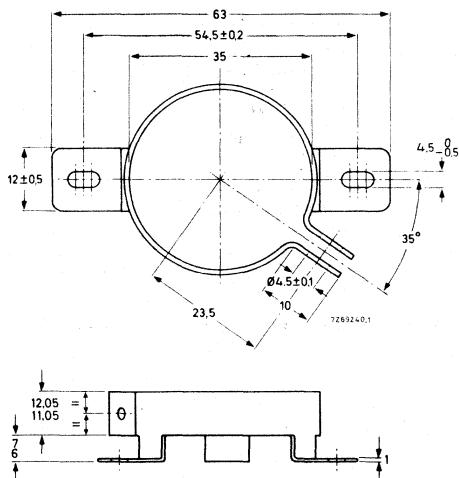



Clamp for case diameter of 65 mm.
Catalogue number 4322 043 04291.

Clamp for case diameter of 50 mm.
Catalogue number 4322 043 04281.

Bolt/nut

When mounting by means of the bolt, which is an integral part of the case, normal metal M8 and M12 nuts and washers can be used.


If an insulated mounting is required a synthetic nut and rubber washers are available.

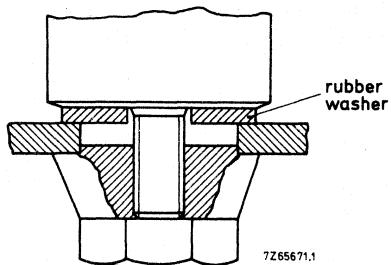

Synthetic cap nut

dimensions in mm

M	D	H	W *)	min. threaded depth	catalogue number
8	25	15	17	11,5	4322 043 05561
12	30	20	19	15,5	4322 043 05571



dimensions in mm

D	d	catalogue number
34	8,4	4322 043 05591
49	13	4322 043 05531
64	13	4322 043 05521

Rubber washer with thickness of 2 mm

*) W measured across flats.

ELECTROLYTIC AND SOLID CAPACITORS

GENERAL

ALUMINIUM ELECTROLYTIC CAPACITORS

SOLID ALUMINIUM CAPACITORS

SOLID TANTALUM CAPACITORS

MAINTENANCE TYPES

STANDARD SERIES OF VALUES IN A DECADE for resistances and capacitances

according to I E C publication 63

E192	E96	E48									
100	100	100	169	169	169	284		481	816		
101			172			287	287	287	487	825	825
102	102		174	174		291			493	835	
104			176			294	294		499	845	845
105	105	105	178	178	178	298		505	856		
106			180			301	301	301	511	866	866
107	107		182	182		305			517	876	
109			184			309	309		523	887	887
110	110	110	187	187	187	312		530	898		
111			189			316	316	316	536	909	909
113	113		191	191		320			542	920	
114			193			324	324		549	931	
115	115	115	196	196	196	328		556	942		
117			198			332	332	332	562	953	953
118	118		200	200		336			569	965	
120			203			340	340		576	976	976
121	121	121	205	205	205	344		583			
123			208			348	348	348	590	590	590
124	124		210	210		352			597		
126			213			357	357		604	604	
127	127	127	215	215	215	361		612		10	10
129			218			365	365	365	619	619	619
130	130					370			626		11
132			221	221		374	374		634		12
133	133	133	223			379			642		15
135			226	226	226	383	383	383	649	649	15
137	137		229			388			657		16
138			232	232		392	392		665		18
140	140	140	234			397			673		20
142			237	237	237	402	402	402	681	681	681
143	143		240			407			690		22
145			243	243		412	412		698	698	
147	147	147	246			417			706		24
149			249	249	249	422	422	422	715	715	715
150	150		252			427			723		27
152			255	255		432	432		732	732	
154	154	154	258			437			741		27
156			261	261	261	442	442	442	750	750	750
158	158		264			448			759		27
160			267	267		453	453		768	768	
162	162	162	271			459			777		27
164			274	274	274	464	464	464	787	787	787
165	165		277			470			796		28
167			280	280		475	475		806	806	

Argentina: PHILIPS ARGENTINA S.A., Div. Elcoma, Vedia 3892, 1430 BUENOS AIRES, Tel. 541-7141/7242/7343/7444/7545.

Australia: PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division, 67 Mars Road, LANE COVE, 2066, N.S.W., Tel. 427 08 88.

Austria: ÖSTERREICHISCHE PHILIPS BAUELEMENTE Industrie G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 62 91 11.

Belgium: N.V. PHILIPS & MBLE ASSOCIATED, 9, rue du Pavillon, B-1030 BRUXELLES, Tel. (02) 242 74 00.

Brazil: IBRAPE, Caixa Postal 7383, Av. Brigadeiro Faria Lima, 1735 SAO PAULO, SP, Tel. (011) 211-2600.

Canada: PHILIPS ELECTRONICS LTD., Electron Devices Div., 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. 292-5161.

Chile: PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. 39-4001.

Colombia: SADAPE S.A., P.O. Box 9805, Calle 13, No. 51 + 39, BOGOTA D.E. 1, Tel. 600 600.

Denmark: MINIWATT A/S, Emdrupvej 115A, DK-2400 KØBENHAVN NV., Tel. (01) 69 16 22.

Finland: OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. 1 72 71.

France: R.T.C. LA RADIOTECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 355 44-99.

Germany: VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burghardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-1.

Greece: PHILIPS S.A. HELLENIQUE, Elcoma Division, Tel. 9215111.

Hong Kong: PHILIPS HONG KONG LTD., Elcoma Div., 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0) 24 51 21.

India: PEICO ELECTRONICS & ELECTRICALS LTD., Ramon House, 169 Backbay Reclamation, BOMBAY 400020, Tel. 295144.

Indonesia: P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Panina Bank Building, 2nd Fl., Jl. Jend. Sudirman, P.O. Box 223, JAKARTA, Tel. 716 131.

Ireland: PHILIPS ELECTRICAL (IRELAND) LTD., Newcastle, Clonskeagh, DUBLIN 14, Tel. 69 33 55.

Italy: PHILIPS S.p.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2 6994.

Japan: NIHON PHILIPS CORP., Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611.

(IC Products) SIGNETICS JAPAN, LTD., TOKYO, Tel. (03)230-1521.

Korea: PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Itaewon-dong, Yongsan-ku, C.P.O. Box 3680, SEOUL, Tel. 794-4202.

Malaysia: PHILIPS MALAYSIA SDN. BERHAD, Lot 2, Jalan 222, Section 14, Petaling Jaya, P.O.B. 2163, KUALA LUMPUR, Selangor, Tel. 77 44 11.

Mexico: ELECTRONICA S.A. de C.V., Varsovia No. 36, MEXICO 6, D.F., Tel. 533-11-80.

Netherlands: PHILIPS NEDERLAND, Marktgroep Elcon, Postbus 90050, 5600 PB EINDHOVEN, Tel. (040) 79 33 33.

New Zealand: PHILIPS ELECTRICAL IND. LTD., Elcoma Division, 2 Wagener Place, St. Lukes, AUCKLAND, Tel. 894-160.

Norway: NORSK A/S PHILIPS, Electronic Div., Sandstuveien 70, OSLO 6, Tel. 33 62 70.

Peru: CADESA, Av. Alfonso Ugarte 1268 , LIMA 5, Tel. 326070.

Philippines: PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tamo, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. 86-89-51 to 59.

Portugal: PHILIPS PORTUGESA S.A.R.L., Av. Eng. Duarte Pacheco 6, LISBOA 1, Tel. 68 31 21.

Singapore: PHILIPS PROJECT DEV. (SINGAPORE) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 25 38 811.

South Africa: EDAC (Pty.) Ltd., 3rd Floor Rainier House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001, Tel. 614-2362/9.

Spain: MINIWATT S.A., Balmes 22, BARCELONA 7, Tel. 30163 12.

Sweden: A.B. ELCOMA, Lidengåvgen 50, S-11584 STOCKHOLM 27, Tel. 08/67 97 80.

Switzerland: PHILIPS A.G., Elcoma Dept., Allmendstrasse 140-142, CH-8027 ZÜRICH, Tel. 01-488 22 11.

Taiwan: PHILIPS TAIWAN LTD., 3rd Fl., San Min Building, 57-1, Chung Shan N. Rd, Section 2, P.O. Box 22978, TAIPEI, Tel. (02)-5631717.

Thailand: PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Silom Road, P.O. Box 961, BANGKOK, Tel. 233-6330-9.

Turkey: TURK PHILIPS TICARET A.S., EMET Department, Inonu Cad. No. 78-80, ISTANBUL, Tel. 43 59 10.

United Kingdom: MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-580 6633.

United States: (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000.
(Passive Devices) MEPCO/ELECTRA INC., Columbia Rd., MORRISTOWN, N.J. 07660, Tel. (201)539-2000.
(Passive Devices & Electromechanical Devices) CENTRALAB INC., 5855 N. Glen Park Rd., MILWAUKEE, WI 53201, Tel. (414)228-7380.
(IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 739-7700.

Uruguay: LUZILECTRON S.A., Avda Rondeau 1576, piso 5, MONTEVIDEO, Tel. 914321.

Venezuela: IND. VENEZOLANAS PHILIPS S.A., Elcoma Dept., A. Ppal de Ira Ruiz, Edif. Centro Colgate, CARACAS, Tel. 36 05 11.

For all other countries apply to: N.V. PHILIPS, Electronic Components and Materials Division, Corporate Relations & Projects, Building BAE3, 5600 MD EINDHOVEN, THE NETHERLANDS, Telex 35000, Tel. (040) 72 33 04.

A25

© 1982 N.V. Philips' Gloeilampenfabrieken

This information is furnished for guidance, and with no guarantees as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part, without the written consent of the publisher.