

PHILIPS

Data handbook



Electronic
components
and materials

Components and materials

Part 9






March 1982

Piezoelectric quartz devices

COMPONENTS AND MATERIALS

PART 9 - MARCH 1982

PIEZOELECTRIC QUARTZ DEVICES

QUARTZ CRYSTAL UNITS GENERAL	A	
QUARTZ CRYSTAL UNITS FOR STANDARD APPLICATIONS	B	
QUARTZ CRYSTAL UNITS FOR GENERAL FREQUENCY STABILIZATION AND SPECIAL APPLICATIONS	C	
TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS	D	
COMPACT INTEGRATED OSCILLATORS	E	

DATA HANDBOOK SYSTEM

Our Data Handbook System is a comprehensive source of information on electronic components, sub-assemblies and materials; it is made up of four series of handbooks each comprising several parts.

ELECTRON TUBES	BLUE
SEMICONDUCTORS	RED
INTEGRATED CIRCUITS	PURPLE
COMPONENTS AND MATERIALS	GREEN

The several parts contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

Where ratings or specifications differ from those published in the preceding edition they are pointed out by arrows. Where application information is given it is advisory and does not form part of the product specification.

If you need confirmation that the published data about any of our products are the latest available, please contact our representative. He is at your service and will be glad to answer your inquiries.

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part without the written consent of the publisher.

ELECTRON TUBES (BLUE SERIES)

Starting in 1980, new part numbers and corresponding codes are being introduced. The former code of the preceding issue is given in brackets under the new code.

Part 1	February 1980	T1 02-80 (ET1a 12-75)	Tubes for r.f. heating
Part 2	April 1980	T2 04-80 (ET1b 08-77)	Transmitting tubes for communications
Part 2b	May 1978	ET2b 05-78	Microwave semiconductors and components Gunn, Impatt and noise diodes, mixer and detector diodes, backward diodes, varactor diodes, Gunn oscillators, sub-assemblies, circulators and isolators.
Part 3	June 1980	T3 06-80 (ET2a 11-77)	Klystrons, travelling-wave tubes, microwave diodes
Part 3	January 1975	ET3 01-75	Special Quality tubes, miscellaneous devices
Part 4	September 1980	T4 09-80 (ET2a 11-77)	Magnetrons
Part 5	August 1981	T5 08-81 (ET5a 10-79)	Cathode-ray tubes Instrument tubes, monitor and display tubes, C.R. tubes for special applications.
Part 6	July 1980	T6 07-80 (ET6 01-77)	Geiger-Müller tubes
Part 7	February 1982	T7 02-82 (ET7a 03-77) (ET7b 05-79)	Gas-filled tubes Segment indicator tubes, indicator tubes, dry reed contact units, thyratrons, industrial rectifying tubes, ignitrons, high-voltage rectifying tubes, associated accessories.
Part 8	February 1982	T8 02-82 (ET8 07-79)	Picture tubes and components Colour TV picture tubes, black and white TV picture tubes, colour monitor tubes for data graphic display, monochrome monitor tubes for data graphic display, components for colour television, components for black and white television and monochrome data graphic display.
Part 9	June 1980	T9 06-80 (ET9 03-78)	Photo and electron multipliers Photomultiplier tubes, phototubes, single channel electron multipliers, channel electron multiplier plates.
Part 10	May 1981	T10 05-81 (ET5b 12-78)	Camera tubes and accessories, image intensifiers

SEMICONDUCTORS (RED SERIES)

Starting in 1980, new part numbers and corresponding codes are being introduced. The former code of the preceding issue is given in brackets under the new code.

Part 1	March 1980	S1 03-80 (SC1b 05-77)	Diodes Small-signal germanium diodes, small-signal silicon diodes, special diodes, voltage regulator diodes (< 1,5 W), voltage reference diodes, tuner diodes, rectifier diodes
Part 2	May 1980	S2 05-80 (SC1a 08-78)	Power diodes, thyristors, triacs Rectifier diodes, voltage regulator diodes (> 1,5 W), rectifier stacks, thyristors, triacs
Part 3	April 1980	S3 04-80 (SC2 11-77, partly) (SC3 01-78, partly)	Small-signal transistors
Part 4	September 1981	S4 09-81 (SC2 06-79)	Low-frequency power transistors
Part 5	October 1980	S5 10-80 (SC3 01-78, partly)	Field-effect transistors
Part 6	April 1982	S6 04-82 (SC4a 12-78)	R.F. power transistors and modules
Part 7	December 1980	S7 12-80 (SC4c 07-78)	Microminiature semiconductors for hybrid circuits
Part 8	April 1980	S8 06-81 (SC4b 09-78)	Devices for optoelectronics Photosensitive diodes and transistors, light-emitting diodes, displays, photocouplers, infrared sensitive devices, photoconductive devices
Part 10	September 1981	S10 09-81 (SC3 01-78, partly)	Wideband transistors and wideband hybrid IC modules

INTEGRATED CIRCUITS (PURPLE SERIES)

Starting in 1980, new part numbers and corresponding codes are being introduced. The former code of the preceding issue is given in brackets under the new code. Books with the purple cover will replace existing red covered editions as each is revised.

Part 1	May 1980	IC1 05-80 (SC5b 03-77)	Bipolar ICs for radio and audio equipment
Part 2	May 1980	IC2 05-80 (SC5b 03-77)	Bipolar ICs for video equipment
Part 4	October 1980	IC4 10-80 (SC6 10-77)	Digital integrated circuits LOCOS HE4000B family
Part 5	February 1982	IC5 02-82	Digital integrated circuits - ECL ECL10 000 (GX family) ECL100 000 (HX family) Dedicated designs
Part 5a	November 1976	SC5a 11-76	Professional analogue integrated circuits
Part 6b	August 1979	SC6b 08-79	ICs for digital systems in radio and television receivers
Part 7	May 1981	IC7 05-81	Signetics Bipolar memories
Part 8	May 1981	IC8 05-81	Signetics Analogue circuits
Part 9	November 1981	IC9 11-81	Signetics TTL Logic

COMPONENTS AND MATERIALS (GREEN SERIES)

Starting in 1980, new part numbers and corresponding codes are being introduced. The former code of the preceding issue is given in brackets under the new code.

Part 1	October 1981	C1 10-81	Assemblies for industrial use PLC modules, PC20 modules, HN1L FZ/30 series, NORbits 60-, 61-, 90-series, input devices, hybrid ICs, peripheral devices
Part 2	June 1981	C2 06-81 (CM3a 09-78)	FM tuners, television tuners, video modulators, surface acoustic wave filters
Part 3	January 1981	C3 01-81 (CM3b 10-78)	Loudspeakers
Part 4	December 1981	C4 12-81	Ferroxcube potcores, square cores and cross cores
Part 4a	November 1978	CM4a 11-78	Soft Ferrites Ferrites for radio, audio and television, beads and chokes, FXC potcores and square cores, FXC transformer cores
Part 6	May 1981	C6 05-81 (CM6 04-77)	Electric motors and accessories Permanent magnet synchronous motors, stepping motors, direct current motors
Part 7a	January 1979	CM7a 01-79	Assemblies Circuit blocks 40-series and CSA70 (L), counter modules 50-series, input/output devices
Part 8	September 1981	C8 09-81 (CM8 06-79)	Variable mains transformers
Part 9	March 1982	C9 03-82 (CM9 08-79)	Piezoelectric quartz devices Quartz crystal units, temperature compensated crystal oscillators, compact integrated oscillators
Part 10	October 1980	C10 10-80	Connectors
Part 11	December 1979	CM11 12-79	Non-linear resistors Voltage dependent resistors (VDR), light dependent resistors (LDR), negative temperature coefficient thermistors (NTC), positive temperature coefficient thermistors (PTC)
Part 12	November 1979	CM12 11-79	Variable resistors and test switches
Part 13	December 1979	CM13 12-79	Fixed resistors
Part 14	April 1980	C14 04-80 (CM2b 02-78)	Electrolytic and solid capacitors
Part 15	May 1980	C15 05-80 (CM2b 02-78)	Film capacitors, ceramic capacitors, variable capacitors
Part 16	January 1982	C16 01-82 (CM4b 02-79)	Piezoelectric ceramics, permanent magnet materials

QUARTZ CRYSTAL UNITS
GENERAL

A



Survey of types	A2
Introduction	A4
Terms and definitions	A5
Electrical properties and behaviour	A7
Measuring procedures	A18
Holders	A21
How to specify a quartz crystal unit	A25

SURVEY OF TYPES

AT-cut quartz crystals for general frequency stabilization.

mode of vibration	frequency range MHz	holder*			basic catalogue number	page	
		type	housing	connections			
fundamental	3 to 10 **	RW-36	resistance welded	pins	4322 148 5	C3	
		RW-10	resistance welded	flying leads	4322 148 6	C3	
	1,8 to 25 1 to 25 1,8 to 25 4,5 to 25	RW-36	resistance welded	pins	4322 149 5	C5	
		HC-6/U	solder sealed	pins	4322 152 5	C7	
		HC-27/U	all-glass	pins	4322 154 5	C11	
		HC-26/U	all-glass	flying leads	4322 155 5	C15	
		HC-29/U	all-glass	pins	4322 155 6	C15	
		RW-43	resistance welded	flying leads	4322 156 5	C19	
		RW-42	resistance welded	pins	4322 156 6	C19	
		third overtone	10 to 75	HC-6/U	solder sealed	pins	4322 157 5
HC-27/U	all-glass			pins	4322 159 5	C22	
RW-36	resistance welded			pins	4322 162 5	C27	
17 to 75	RW-43		resistance welded	flying leads	4322 161 5	C26	
	RW-42		resistance welded	pins	4322 161 6	C26	
20 to 75	HC-26/U		all-glass	flying leads	4322 160 5	C25	
	HC-29/U		all-glass	pins	4322 160 6	C25	
fifth overtone	50 to 125		HC-6/U	solder sealed	pins	4322 163 5	C28
			HC-27/U	all-glass	pins	4322 165 5	C29
		HC-26/U	all-glass	flying leads	4322 166 5	C30	
		HC-29/U	all-glass	pins	4322 166 6	C30	
		RW-43	resistance welded	flying leads	4322 167 5	C31	
		RW-42	resistance welded	pins	4322 167 6	C31	
		RW-36	resistance welded	pins	4322 168 5	C32	

Special types

fundamental	1 MHz	HC-6/U	solder sealed	pins	4322 152 01240	C9
third overtone	10 MHz high precision	HC-27/U	all-glass	pins	4322 159 00001	C23

SC-cut quartz crystals for use in ovens ***

Quartz crystal cuts for temperature measurements

Frequencies between 4 and 10 MHz ***

* Several crystals can be supplied in holder RW-80 or TO-39 on request.

** For projects in which medium quantities are required.

*** Information available on request.

AT-cut quartz crystals for standard applications

frequency* kHz	holder**	application	catalogue number (see note)	page	
3000,000	RW-43 ***	microprocessors	4322 144 04410	B59	
3276,800		timing	144 04420	B61	
3579,545		colour television sets	144 04390	B55	
		two-tone dialling	144 04400	B57	
3582,056		colour television sets	144 04380	B53	
3686,400		microprocessors	144 04370	B51	
3750,000			144 04430	B63	
4000,000		digital tuning	143 04090	B11	
4194,304		quartz clocks	143 04070	B9	
4250,000		SECAM-L system	144 04360	B49	
4406,250		SECAM-L system	144 04350	B47	
4433,619		colour television sets	143 04040		
			143 04250		
			143 04280	B5	
4500,000		V.L.P.	144 04110	B23	
4531,468		V.L.P.	144 04120	B25	
4608,000		microprocessors	144 04340	B45	
4782,720		two-tone dialling	143 04030	B3	
			144 04290	B35	
4905,021		V.C.R.	143 04130	B15	
4915,200			143 04140	B17	
			143 04200	B21	
5000,000		colour television cameras	144 04150	B27	
5068,800		microprocessors	144 04330	B43	
5120,000		carradios	143 04160	B19	
6000,000		teletext, viewdata	143 04100	B13	
6144,000		microprocessors	144 04320	B41	
6144,000		TO-39	microprocessors	150 00010	B67
6400,000			microprocessors	144 04310	B39
7151,223			colour television sets	144 04170	B29
7159,090		colour television sets	144 04180	B31	
7164,112	RW-43	colour television sets	144 04190	B33	
8000,000		microprocessors	144 04300	B37	
8867,238		V.C.R. and C.T.V.	143 04050		
			143 04220	B7	
21480,000	RW-80	portable prof. radio equipment	145 00010	B65	

Note

When ordering please quote the catalogue number as given here: the number printed on the unit consists only of the last five digits. The last digit printed on the unit may be other than zero as it represents the latest modification.

- * Quartz crystal units with other frequencies between 3000 and 9000 kHz can be supplied on request.
- ** All these holders are resistance welded and provided with flying leads.
- *** Standard lead length 12 mm minimum. Available on request lead lengths: 4,6-1 mm and 5,0 + 1 mm.

INTRODUCTION

A quartz crystal unit consists of a quartz crystal element with electrodes, mounted in an enclosure with connecting pins or leads.

The quartz crystal element is a vibrating resonant plate which relies upon the piezoelectric effect to couple it to electrical circuits. The intrinsic properties of quartz make it a unique device for accurate and stable frequency control and selection. Although the properties of quartz (T.C., ageing, high Q-factor) are very stable, the ultimate performance of the element is largely dependent on the environment and the associated electrical circuits. We strongly advise that a particular application be discussed with the crystal manufacturer at the earliest stage in any design.

Crystal elements are normally cut in the form of plates or bars. The dimensions of these elements and their orientation with respect to the axes of the crystal give the characteristic of the element. The dimensions are such that the mechanical resonance frequency equals the desired electrical frequency. There are a large number of crystal cuts but the most advantageous orientation is the so-called AT-cut. The frequency range that can be covered herewith is from 1 to 250 MHz. A practical range is from 1,8 to 125 MHz. The crystal element may vibrate in the frequency of a fundamental mode of vibration or in the third, fifth or higher overtone.

→ Our SC-cut quartz crystals are very suitable for use in ovens.

Several cuts specially for digital temperature measurements are applied as temperature sensors.

TERMS AND DEFINITIONS

in accordance with IEC 122-1

Resonance frequency f_r	The lower of the two frequencies of the crystal unit alone, under specified conditions, at which the electrical impedance of the crystal unit is resistive.
Anti-resonance frequency f_a	The higher of the two frequencies of a crystal unit alone, under specified conditions, at which the electrical impedance of the crystal unit is resistive.
Load resonance frequency f_L	One of the two frequencies of a crystal unit in association with a series or with a parallel load capacitance, under specified conditions, at which the electrical impedance of the combination is resistive. This frequency is the lower of the two frequencies when the load capacitance is in series and the higher when it is in parallel (see Fig. 2). For a given value of load capacitance (C_L), these frequencies are identical for all practical purposes and given by: $\frac{1}{f} = 2\pi \sqrt{\frac{L_1 C_1 (C_0 + C_L)}{C_1 + C_0 + C_L}}$
Nominal frequency f_n	The frequency assigned by the specification of the crystal unit.
Working frequency f_w	The operational frequency of the crystal unit together with its associated circuits.
Overall tolerance	The maximum permissible deviation of the working frequency from nominal frequency due to a specific cause or a combination of causes.
Adjustment tolerance	The permissible deviation from the nominal frequency at the reference temperature under specified conditions.
Ageing tolerance	The permissible deviation due to time under specified conditions.
Tolerance over the temperature range	The permissible deviation over the temperature range with respect to the frequency at the specified reference temperature.
Tolerance due to level of drive variation	The permissible deviation due to the variation of level of drive.



Operating temperature range	The range of temperatures as measured on the enclosure over which the crystal unit must function within the specified tolerances.
Operable temperature range	The range of temperatures as measured on the enclosure over which the crystal unit must function though not necessarily within the specified tolerances.
Reference temperature	The temperature at which certain crystal measurements are made. For controlled temperature units, the reference temperature is the mid-point of the controlled temperature range. For non-controlled temperature units, the reference temperature is normally 25 ± 2 °C.
Resonance resistance R	The resistance of the crystal unit alone at the resonance frequency f_r .
Load resonance resistance R_L	The resistance of the crystal unit in series with a stated external capacitance at the load resonance frequency f_L . Note: The value of R_L is related to the value of R by the following expression: $R_L = R \left(1 + \frac{C_0}{C_L}\right)^2$
Level of drive	A measure of the conditions imposed upon the crystal unit expressed in terms of power dissipated. Note: In special cases, the level of drive may be specified in terms of crystal current or voltage.
Unwanted response	A state of resonance of a crystal vibrator other than that associated with the working frequency.
Load capacitance C_L	The effective external capacitance associated with the crystal unit which determines the load resonance frequency f_L .
Ageing (long-term parameter variation)	The relation which exists between any parameter (e.g. resonance frequency) and time. Note: Such parameter variation is due to long-term changes in the crystal unit and is usually expressed in fractional parts per period of time.
Motional capacitance C_1	The capacitance of the motional (series) arm of the equivalent circuit.
Motional inductance L_1	The inductance in the motional (series) arm of the equivalent circuit.

ELECTRICAL PROPERTIES AND BEHAVIOUR

CRYSTAL UNIT EQUIVALENT CIRCUIT

The equivalent circuit, which has the same impedance as the unit in the immediate neighbourhood of resonance, is usually represented by an inductance, capacitance and resistance in series, this series branch being shunted by the capacitance between the terminals of the unit. The parameters of the series branch are usually given by L_1 , C_1 and R_1 . The parallel capacitance is given by C_0 (see Fig. 1).

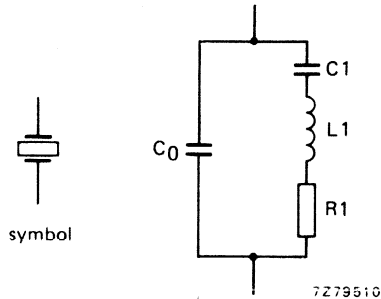


Fig. 1 Crystal unit equivalent circuit.

The parameters of the series branch are termed the "motional parameters" of the crystal unit. The parameter C_0 is termed the "parallel capacitance".

The equivalent circuit has two resonance frequencies at which the electrical impedance is resistive: the "resonance frequency f_r " and the "anti-resonance frequency f_a ". The resistance of the equivalent circuit at the resonance frequency f_r is termed the "resonance resistance R ".

For $R_1 \ll \frac{1}{\omega C_0}$ the following relations hold:

$$f_r = \frac{1}{2\pi\sqrt{L_1 C_1}} \quad (1)$$

$$f_a = \frac{1}{2\pi\sqrt{L_1 \frac{C_1 C_0}{C_1 + C_0}}} \quad (2)$$

$$R = R_1 \quad (3)$$

LOAD CAPACITANCE AND FREQUENCY PULLING

During manufacture definable limits are set to the accuracy of frequency. In an oscillator, a load capacitance C_L is required to trim the working frequency f_w to the nominal frequency f_n . Figure 2 shows the crystal unit equivalent circuit with a load capacitance in series and in parallel. Each combination has two resonance frequencies at which the electrical impedance of the circuit is resistive. The lower of the two frequencies, when the load capacitance is connected in series and the higher, when it is connected in parallel are termed "load resonance frequencies f_L ". At the frequency f_L the resistance of the combination with the load capacitance in series is termed "load resonance resistance R_L ".

For $R_1 \ll 1/\omega C_0$:

$$f_L = \frac{1}{2\pi \sqrt{L_1 \frac{C_1(C_0 + C_L)}{C_1 + (C_0 + C_L)}}} \quad (4)$$

$$R_L = R \left(1 + \frac{C_0}{C_L}\right)^2 \quad *$$

For a given value of C_L the load resonance frequencies of the series and the parallel combinations are identical.

In practice, however, the parallel combination shown in Fig. 2c rarely occurs in an oscillator.

From equation (4) two conspicuous second parameters of vital concern can be derived: the difference between load resonance frequency f_L and resonance frequency f_r , " Δf ", and the relative change in frequency as a function of the change in load capacitance, termed "pulling sensitivity S ".

" Δf "

$$\Delta f = f_L - f_r \quad (6)$$

with f_L from equation (4)

$$\Delta f = \frac{1}{2} f_r \frac{C_1}{C_0 + C_L} - \frac{\Delta f^2}{2 f_s} \quad (7)$$

and to a close approximation

$$\Delta f = \frac{1}{2} f_r \frac{C_1}{C_0 + C_L} \quad (8)$$

Equation (8) greatly simplifies calculations and methods of measurement, whilst the error is negligible in nearly all cases.

* The resistance of the combination with the load capacitance in parallel is given by

$$R_{L \text{ par}} = \frac{1}{R_1 \cdot \omega_r^2 (C_0 + C_L)^2}$$

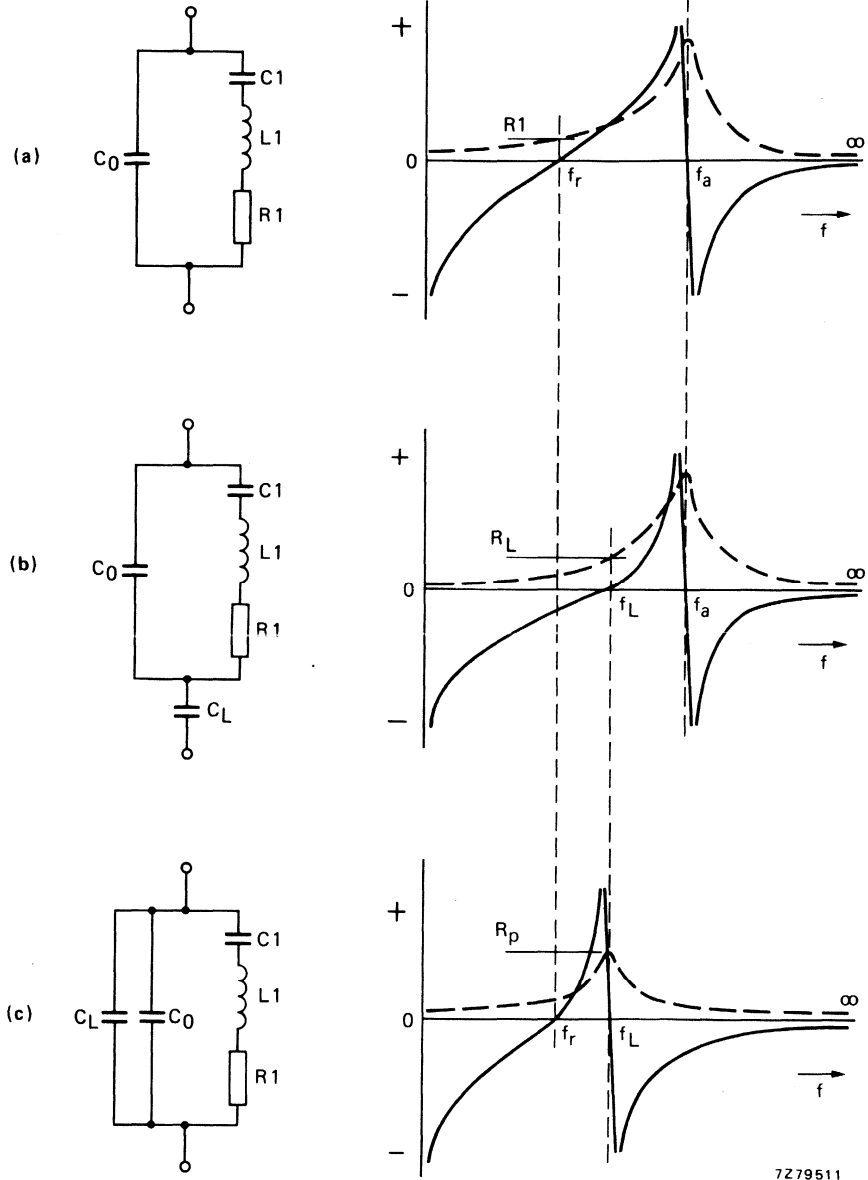


Fig. 2 Resonance, anti-resonance and load resonance frequency.

— reactance
 - - - resistance

7279511

QUARTZ CRYSTAL UNITS

Pulling sensitivity S

$$S = \frac{1}{f_L} \left(\frac{\delta f}{\delta C_L} \right)_{f=f_L} = + \frac{1}{f_L} \cdot \frac{\delta \Delta f}{\delta C_L}$$

with Δf from equation (8)

$$S = - \frac{1}{2} f_r \frac{C_1}{(C_0 + C_L)^2} \cdot \frac{1}{f_L} \quad (9)$$

and to a close approximation

$$S = - \frac{C_1}{2(C_0 + C_L)^2} \quad (10)$$

Standard values of load capacitance

The standard values of load capacitance for crystal units operating at the fundamental frequency of the mode are:

20 pF, 30 pF, 50 pF, 100 pF.

Note that in some countries 32 pF is still in use, but this value should not be considered as a standard value and its use is deprecated.

In special cases load capacitances of the values 8, 12 and 15 pF may be used for fundamental mode crystal units.

Overtone crystals are often operated at series resonance. Where a load capacitance is used, it should be chosen from the following standard values:

8 pF, 12 pF, 15 pF, 20 pF, 30 pF.

The pulling sensitivity expressed in $10^{-6}/\text{pF}$ is a good measure for the frequency sensitivity as a function of load capacitance variations at the working frequency.

Figure 3 illustrates Δf and the pulling sensitivity S as a function of the load capacitance, for two quartz crystals having different C_1 values. It should be noted that a tolerance of $\frac{1}{2}$ pF on a 20 pF load capacitance may lead to an error of $\pm 11 \cdot 10^{-6}$.

Crystal (a)

$$f_r = 10\,000,000 \text{ kHz}$$

$$C_0 = 5 \text{ pF}$$

$$C_1 = 28 \text{ fF}$$

$$C_L = 20 \text{ pF}$$

$$f_L = 10\,005,600 \text{ kHz}$$

$$S = -22,4 \cdot 10^{-6}/\text{pF}$$

Crystal (b)

$$f_r = 10\,000,000 \text{ kHz}$$

$$C_0 = 2 \text{ pF}$$

$$C_1 = 5,6 \text{ fF}$$

$$C_L = 20 \text{ pF}$$

$$f_L = 10\,001,273 \text{ kHz}$$

$$S = -5,79 \cdot 10^{-6}/\text{pF}$$

Specified, or in special cases, measured Δf and S, as given for crystal (a) in Table 1, offer a simple direct guidance.

Table 1

nominal frequency $f_n = f_L$	10 000,000 kHz	
nominal load capacitance C_L	20 pF	
Δf	specified 5,600 kHz	measured 5,700 kHz
pulling sensitivity S	$-22 \pm 2 \times 10^{-6}/\text{pF}$	$-22,4 \times 10^{-6}/\text{pF}$

7Z79512

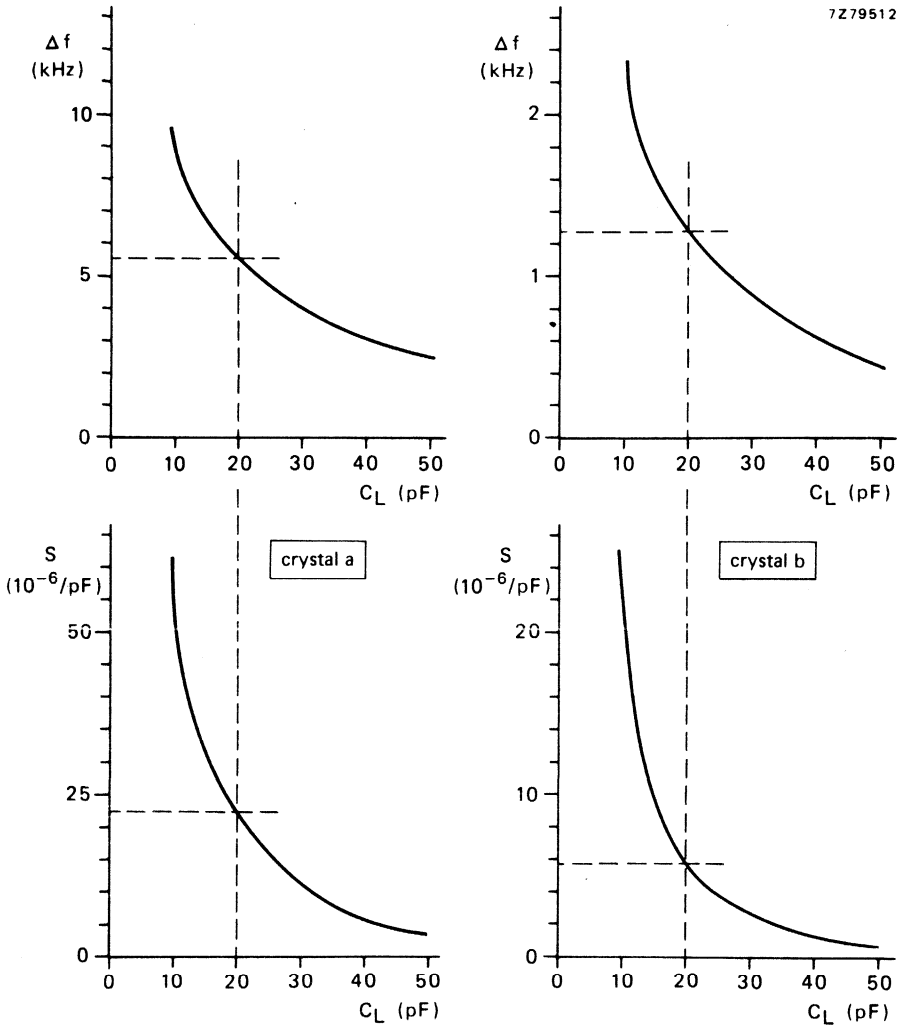


Fig. 3 Δf and pulling sensitivity as a function of the load capacitance. Tolerances on the parameters f_r , C_0 and C_1 are required for calculating the " Δf " and the "pullability at f_n ".

QUARTZ CRYSTAL
UNITS

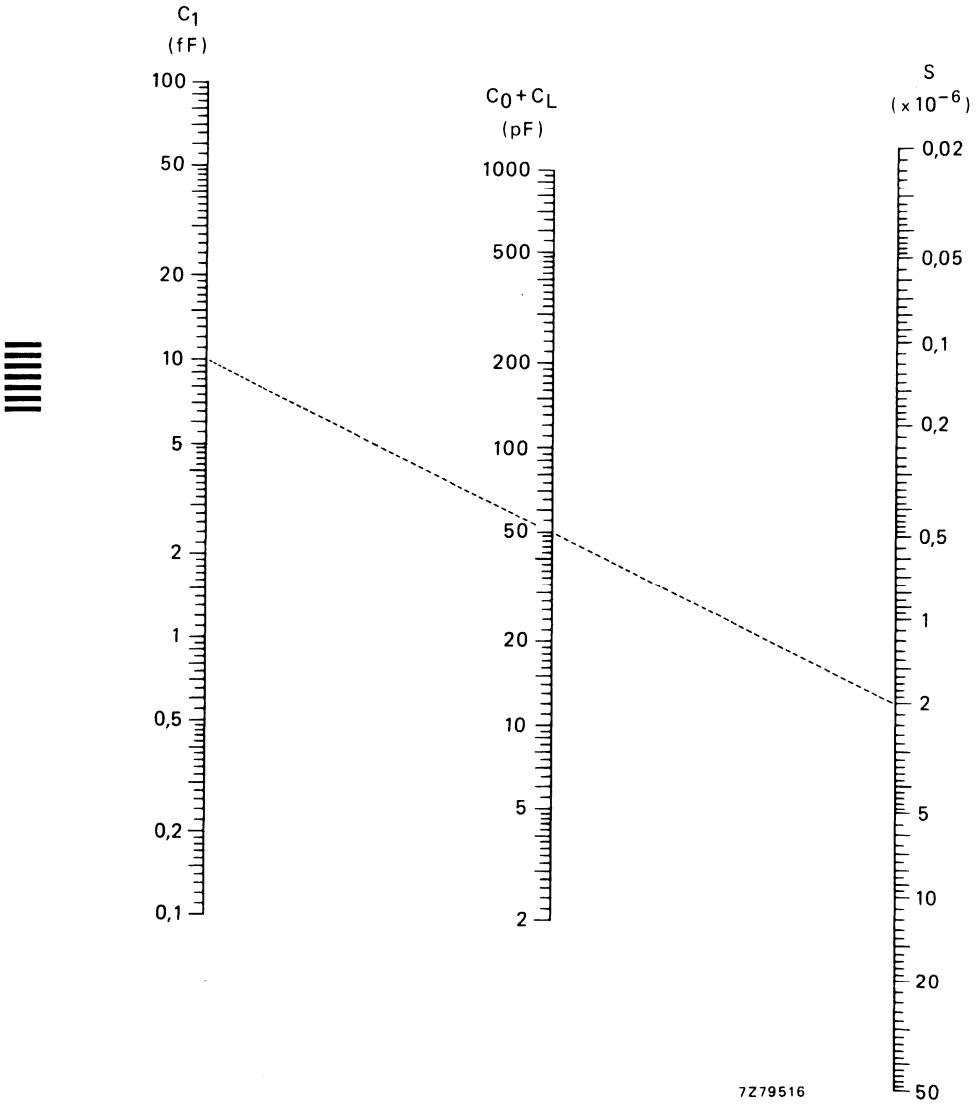


Fig. 4 Nomogram enabling the determination of the pulling sensitivity S.

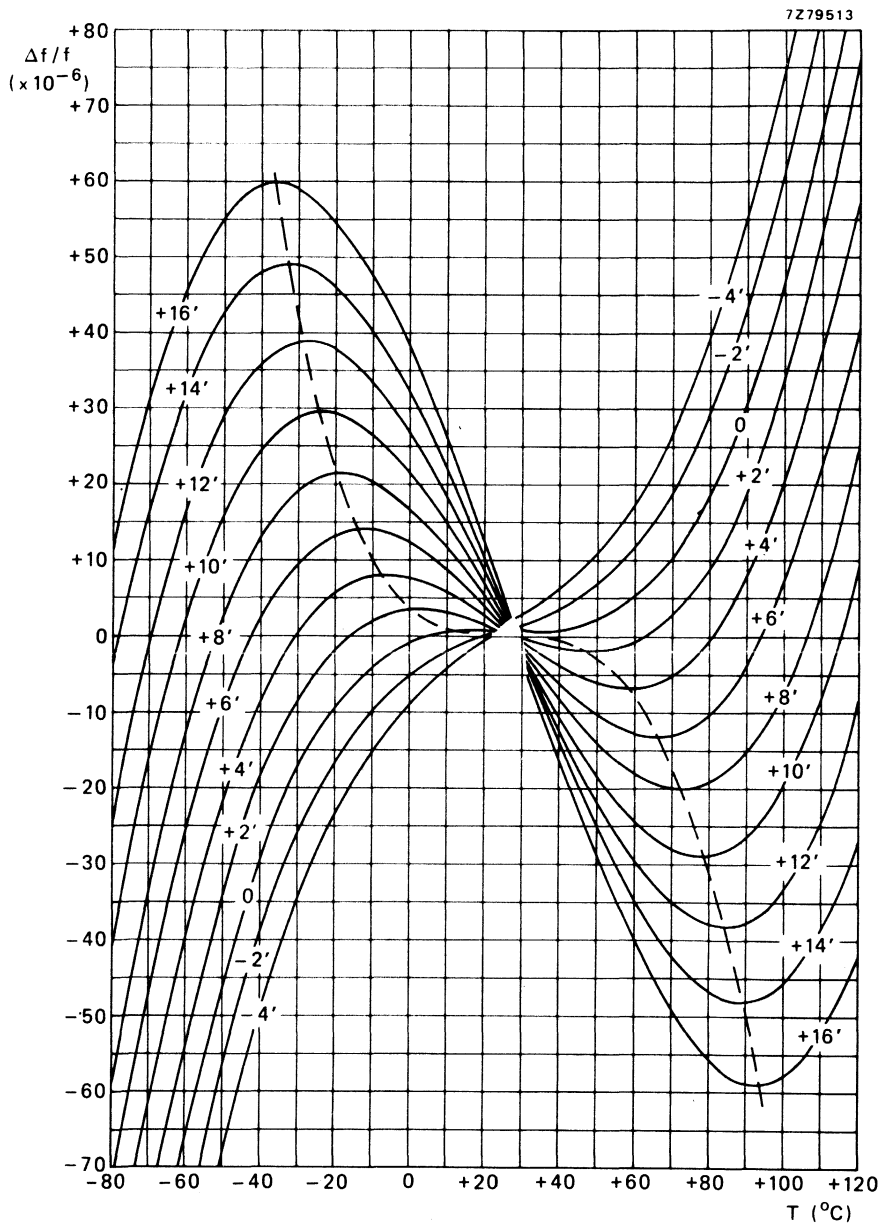


Fig. 5 Frequency/temperature characteristics of a special crystal design.

LEVEL OF DRIVE

The power dissipated in a crystal unit is termed "level of drive" and is usually expressed in mW. In the level of drive range 10^{-12} to 10^{-3} W the drive level dependency of the crystal unit characteristics is almost negligible. For drive levels greater than approximately 1 mW, the crystal unit characteristics tend to change. For this reason the crystal unit characteristics are specified at a level of drive of 0,5 mW.

Low drive levels

If a crystal unit in an oscillator starts to build up electrical power, low drive levels $< 10^{-12}$ W may occur depending on the circuit applied. The load resonance resistance R_L and resonance resistance R may increase slightly at these low levels.

High drive levels

For high stable applications drive levels greater than 0,5 mW should be avoided. Excessively high drive levels (> 10 mW) may lead to serious deviations.

FREQUENCY/TEMPERATURE CHARACTERISTICS

The frequency drift as a function of temperature can be represented by a graph, the T.C. curve or drift characteristic. In the case of AT cuts, the relation of drift and temperature is approximated by a cubic curve; the drift characteristic of the other cuts is parabolic in shape.

Figure 5 shows a number of frequency-temperature curves obtained from AT-cut crystals with various angles of cut α (from $-4'$ to $+16'$ increasing angle of cut). The curves are symmetrical with respect to 27°C , and it is not possible to shift this point. A temperature range which is fairly symmetrical with respect to 27°C (e.g. $0 - 60^\circ\text{C}$) will, therefore, result in the smallest frequency drift in that range. A small frequency drift over a wide temperature range, e.g. -40 to $+80^\circ\text{C}$, will result in a quite steep temperature coefficient at room temperature.

It will be evident that, for AT-cut crystals, the angle of cut and its accuracy are decisive for the frequency drift over a given temperature range.

ADVANTAGES OF ALL-GLASS HOLDERS

Crystal units with all-glass holders show the following advantages over those with metal holders:

- (a) a lower series resistance, which also means a higher Q-factor, thanks to the fact that glass holders are evacuated giving less mechanical damping;
- (b) better performance under adverse climatic conditions;
- (c) a higher frequency stability.

AGEING

A non-reversible, mostly gradual change with time in resonance frequency is called (an effect of) ageing. Only where a very good long-term stability is required should ageing be of consequence. It should be borne in mind that (with a view to ageing only):

- (a) crystal units having an all-glass holder are favourable compared with those having a metal holder;
- (b) low frequency crystals are favourable compared with high frequency crystals having the same crystal cut;
- (c) overtone crystals are favourable compared with fundamental crystals for the same frequency (or fifth overtone compared with third overtone crystals).

CRYSTAL BEHAVIOUR IN AN OSCILLATOR

In the vicinity of resonance the impedance of a quartz crystal unit can be represented by a circle (see Fig. 6). The circle is shifted downwards with respect to the resistance axis over

$$X_0 = \frac{1}{2\pi f_r C_0}$$

When a load capacitance is connected in series with the unit the shift is $X_0 + X_L$, where

$$X_L = \frac{1}{2\pi f_L C_L}$$

The frequency difference between anti-resonance frequency and resonance frequency

$$f_a - f_r \approx \frac{C_1}{2C_0} \cdot f_r \cdot \frac{C_L}{C_0 + C_L}$$

is assumed to be 100%.



It can be seen that the frequency difference between the two frequencies, determined by the phase angle φ , disappears at $f_w = 50\%$. The phase angle in the oscillator should be kept sufficiently small to avoid crystal unit operation in the uncertain 50% area (frequency switching).

Quartz crystal units for frequencies higher than 100 to 125 MHz (depending on type) have an impedance circle with a greater downwards shift, even to below the real axis. When the figure of merit given by

$$M = \frac{X_0}{R_1} = \frac{1}{(2\pi f_r) R_1 C_0}$$

is less than approximately 5, the resonance frequency f_r is arbitrary.



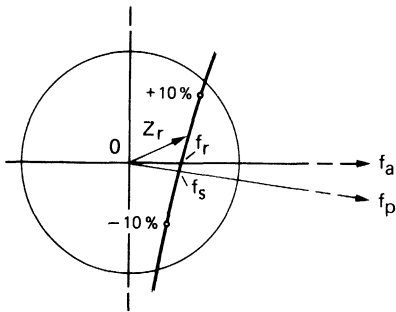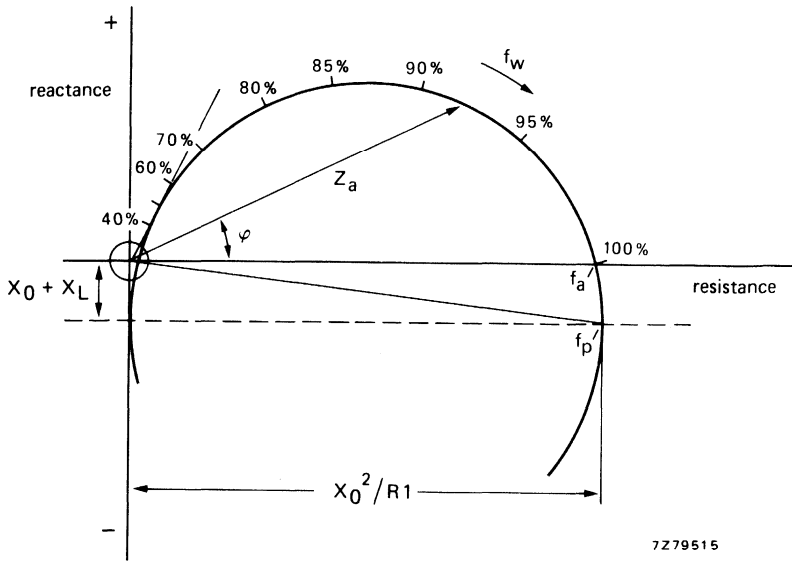

Enlarged area around
the zero point.

- f_a = anti-resonance frequency
- f_r = resonance frequency
- f_s = series resonance frequency
- f_w = working frequency
- Z_r = impedance at working frequency

Fig. 6 Working frequency and impedance of a quartz crystal unit in the impedance diagram.

Indications for use

Keep phase deviations in the circuit sufficiently low to avoid crystal unit operation in the 50% working frequency area, in particular when phase variation is used for frequency pulling (P.L.L. system).

Ensure that amplification is sufficiently high, in particular when applying phase variation.

Keep crystal unit drive level low (generally $\leq 0,5$ mW), see Fig. 7.

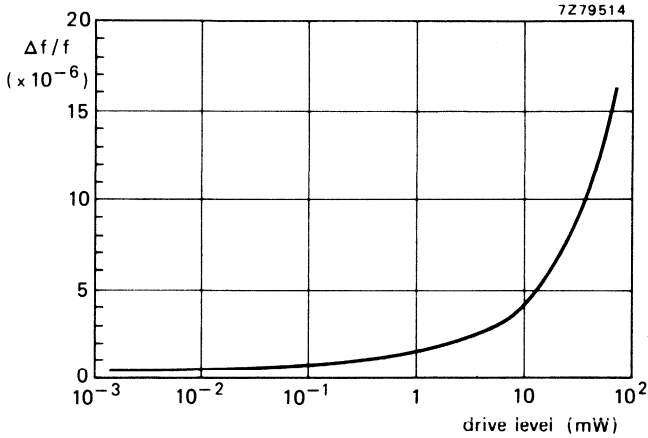


Fig. 7.

MEASURING PROCEDURES

Several methods of measuring quartz crystal units are in use.* Because different methods may give different results, our measuring procedure is given below. This is the *passive method with π -network* according to IEC publication 444. Further, the method is mentioned with *crystal test oscillator type 150A*, make Saunders, which is recommended if a frequency correlation of 2 to 5 ppm is tolerable. The accuracy of reproduction of the π -network method ranges between 10^{-6} and 10^{-8} depending on the type of crystal unit to be measured. The π -network method can be extended for measuring crystal unit parameters very accurately. This is achieved by a slight modification of the π -network, the use of precision reference resistors and two precision high-frequency load capacitors.

PASSIVE METHOD WITH π -NETWORK (IEC)

The principle of this method is very simple. With the equipment shown in the block diagram of Fig. 1, a stable signal source (frequency synthesizer) is adjusted to the frequency at which the signal has zero phase change when passing through the crystal as measured by the phase meter; this frequency (measured with the frequency counter) is then the resonance frequency of the crystal.

For ease of operation, it is possible to phase-lock the system by feeding back the analogue output of the phase error (from zero) to control the precise frequency of the signal source (A.F.C. loop shown by dashed line).

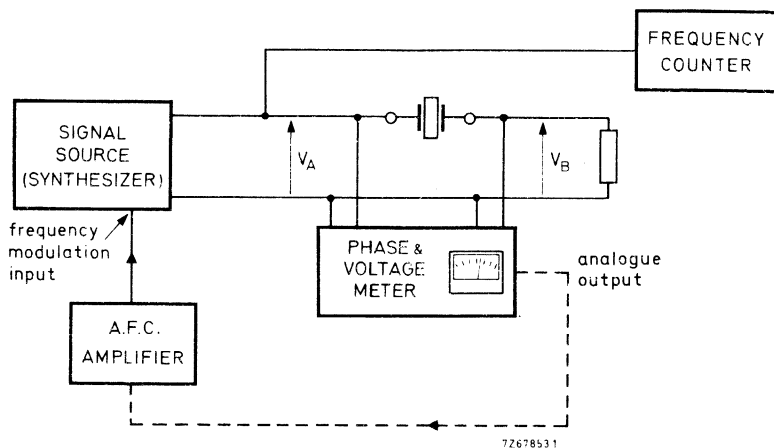


Fig. 1.

* The following measuring methods can be applied on request for the time the obsolete equipment is available:

- Method using *Crystal Test Set, type TS193A* (British Military Standard).
- Method using *Crystal Impedance Meter TS330/TSM* (U.S. Army Standard).
- Method using *Crystal Impedance Meter TS683/TSM* (U.S. Army Standard).

π -network

The first departure which must be made from the simple system of Fig. 1 is the test jig for holding the crystal. The test jig consists of two π -connected resistive pads, carefully manufactured to represent a pure, constant resistance, which is frequency insensitive at the terminals of the quartz crystal (see Fig. 2).

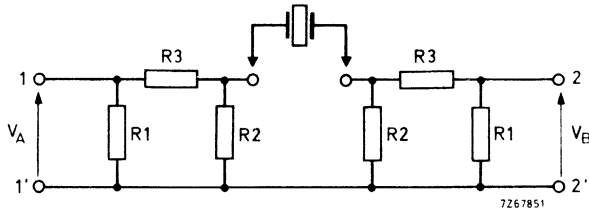


Fig. 2.

The function of the input and output 'pads' is twofold:

- (a) to match the crystal impedance to the associated equipment,
- (b) to attenuate reflections from the associated equipment.

For further particulars consult IEC recommendations, Publication 444.

Quartz crystal parameter measurements

A 5 pF trimming capacitor should be connected in parallel with each of the resistors R2 for accurate compensation of the transmission circuit. A shield is mounted between the contacting plates to reduce the capacitance between them. Two measuring procedures for crystal parameter measurement with the modified π -network are in use:

The C_L method

In general, this method is used for fundamental mode crystal units with frequencies up to 25 MHz.

Precision load capacitors are inserted in the π -network. Load resonance frequency and load resonance resistance can then be measured directly. C_1 can be calculated.

The impedance method

Generally this method is used for higher frequencies up to approximately 125 MHz.

Phase and impedance are measured, all other parameters can be calculated by means of a computer.

Crystal shielding

Depending on the application, crystal shielding may give rise to frequency deviations, in particular for fundamental mode crystal units with a considerable pulling sensitivity.

In our procedure the metal enclosure of the crystal unit normally is not earthed. If, in special cases, earthing is required this should be mentioned in the specification for ordering.

METHOD WITH CRYSTAL TEST OSCILLATOR 150A AND PRINTER PROCESSOR 2000A**Initial calibration**

The accuracy of the crystal test oscillator is for a considerable part determined by the alignment of the capacitance meter. Alignment and check of the capacitance meter by means of a stable precision 75 pF capacitor is recommended. For further particulars see 150 A manual.

HOLDERS



The following holders state the nominal frequency by means of 7 (or 8) figures, in kHz in the case of fundamental crystals and in MHz in the case of overtone crystals. Other figures on the faces constitute registration numbers that relate to the date and series of manufacture.

ALL-GLASS HOLDERS


Dimensions in mm
(in inches between brackets)

HC-27/U



(IEC type DB is identical except for the height which is 26 mm max. instead of 19,7 max.).

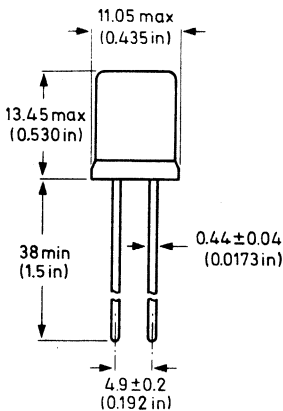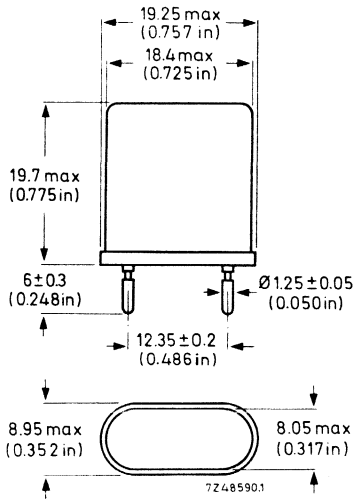

HC-26/U





HC-29/U




QUARTZ CRYSTAL UNITS

METAL HOLDERS


Dimensions in mm
(in inches between brackets)

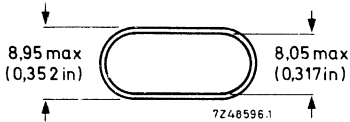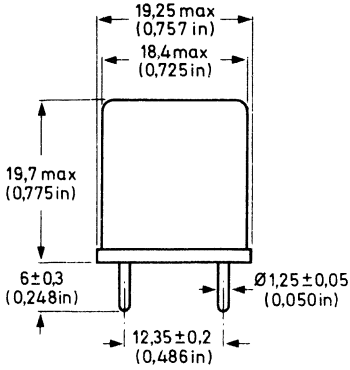


HC-6/U, solder sealed
RW-36, resistance welded

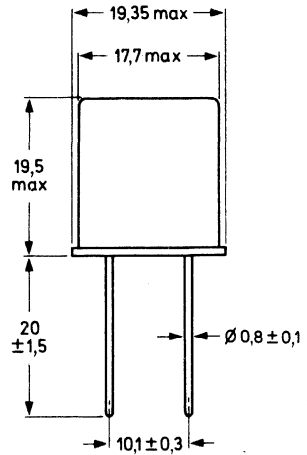


RW-10
resistance welded




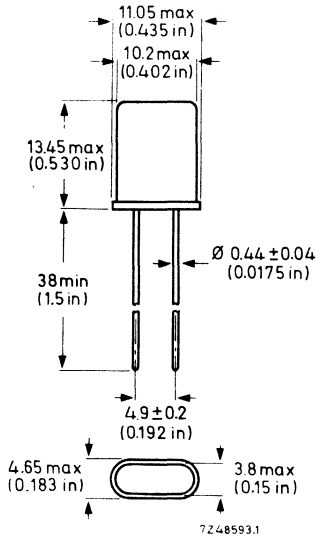


HC-18/U
 solder sealed

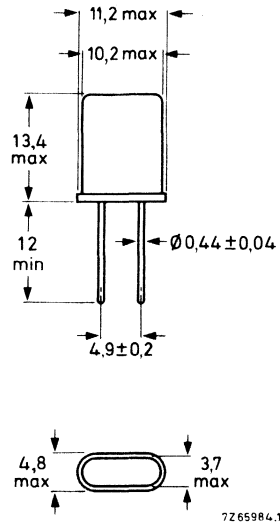

RW-43
 resistance welded

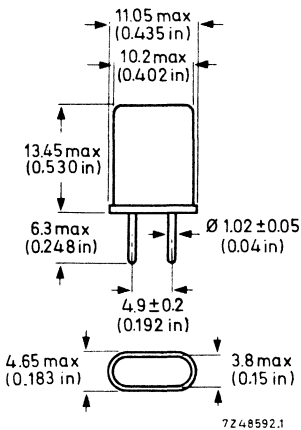


HC-25/U
 solder sealed

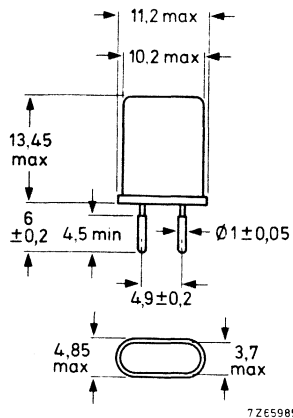


RW-42
 resistance welded

QUARTZ CRYSTAL UNITS


RW-80

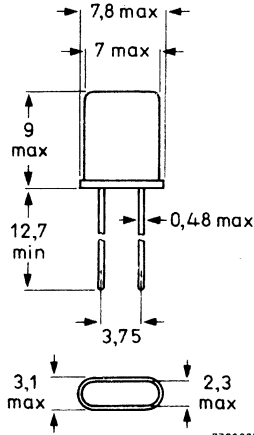

TO-39



Pin 2 is connected to the case.

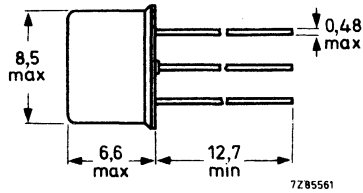

CORRESPONDING IEC AND DIN TYPE NUMBERS

	IEC 122-3	DIN 45110
HC-6/U	AA	K1A
HC-18/U	BC	M2A
HC-25/U	CX	M1A
HC-26/U	CY	R2A
HC-27/U	DA	Q1A
HC-29/U	CZ	R1A
(height 26 mm max.)	DB	Q1B
RW-10	DS	K4A
RW-36	—	K3A
RW-42	DQ	M3A
RW-43	DP	M4A
RW-80	35/EB	N4B
TO-39	17/CK	T1A

HOW TO SPECIFY A QUARTZ CRYSTAL UNIT

For quotation or ordering a quartz crystal unit which still has no complete catalogue number (12 digits), the supplier needs to know certain basic information. Please use the following check list.

Type of crystal unit				
Type of holder				
Nominal frequency		kHz		
Mode of vibration		fundamental or	$\frac{\text{third}}{\text{fifth}}$	overtone
Allowable deviation from nominal frequency (adjustment tolerance) at + 25 °C		x 10 ⁻⁶		
Temperature range		from	to	°C
Frequency drift over specified temperature range		x 10 ⁻⁶		
Circuit conditions:				
resonance frequency f_r or		kHz		
load resonance frequency f_L and		kHz		
load capacitance C_L		pF		
maximum resonance resistance R or		Ω		
maximum load resonance resistance R_L		Ω		
Crystal unit equivalent parameters				
C_1		fF		
C_0		pF		
R_1		Ω		
L_1		mH		
Level of drive		mW		
Ageing $\Delta f/f$ per month or year		x 10 ⁻⁶		
Mechanical requirements/tests				



**QUARTZ CRYSTAL UNITS
FOR STANDARD APPLICATIONS**

B



**Tests and requirements
Data sheets**

**B2
B3**

TESTS AND REQUIREMENTS

Applicable to all units in RW-43 holder, with catalogue number 4322 143 0

IEC 122	IEC 68-2	test	procedures	requirements
2.5.17	Ba	aging	1000 h +100 °C	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
2.5.12 2.5.13 2.5.14	Db	accelerated damp heat	+ 25 to + 55 °C, 6 cycles 95 to 100% R.H.	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
	Na	temperature cycling test	-40/+ 125 °C, 10 cycles, 1 h/cycle.	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
2.5.2	Ea	shock	100g sawtooth 6 shocks, 3 directions	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
2.5.3	Fc	vibration	10-500-10 Hz, 10g, 3 h, 3 directions.	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
	Tb	resistance to soldering heat	3 s, 350 °C.	$\leq 5 \times 10^{-6}$. $\leq 20\%$.
2.5.6	Ub	bending of terminations	1 x 90°, 5 N.	no visible damage.
	Eb	bump	3000 bumps, 30g	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.
	Ed	free fall	3 x 0,75 m on steel	$\Delta f_r \leq 5 \times 10^{-6}$. $\Delta R \leq 20\%$.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4 782,720 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Two-tone telephone dialling system (high accuracy).


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

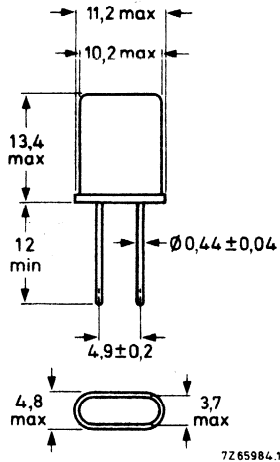

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Resonance frequency f_L	4 782,720 kHz
Adjustment tolerance	\pm max. 50×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 50×10^{-6}
Motional capacitance (C_1)	typ. 21,4 fF
Parallel capacitance (C_0)	typ. 5,8 pF
Resonance resistance	max. 60Ω
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4 433,619 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Intended to be used in the sub-carrier oscillator of colour television sets according to the PAL system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

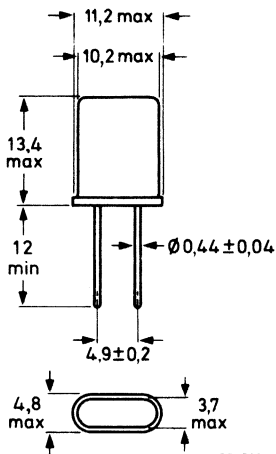

The unit is available with a lead length of:
 min. 3,6 mm under catalogue number 4322 143 04250
 min. 5 mm under catalogue number 4322 143 04280.

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 20 pF	4 433,619 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -10 to $+60$ °C, with respect to $+25$ °C	\pm max. 30×10^{-6}
Motional capacitance (C_1)	typ. 20,4 fF
Parallel capacitance (C_0)	typ. 5,4 pF
Resonance resistance	max. 60Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+12 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60$ °C

TESTS AND REQUIREMENTS

See page B2.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	8 867,238 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

In colour television sets and video cassette recorders.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

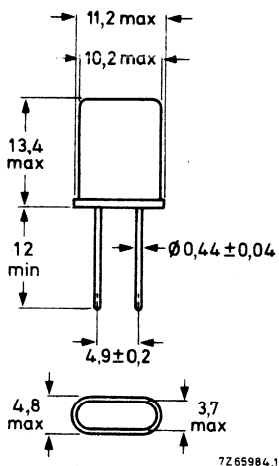

The unit is also available with a lead length of min. 3,6 mm under catalogue number 4322 143 04220.

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .


Load resonance frequency f_L ,
load capacitance 20 pF

8 867,238 kHz

Adjustment tolerance

 \pm max. 40×10^{-6}

Tolerance over the temperature
range of -10 to $+60$ °C, with
respect to $+25$ °C

 \pm max. 25×10^{-6}


→ Motional capacitance (C_1)

typ. 22 fF

Parallel capacitance (C_0)

typ. 5,5 pF

Resonance resistance

max. 60Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+16 \times 10^{-6} \times f_L / \text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

→ Operating temperature range

 -10 to $+60$ °C**TESTS AND REQUIREMENTS**

See page B2.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4 194,304 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Quartz clocks, dividing ratio $2^{22} : 1$.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

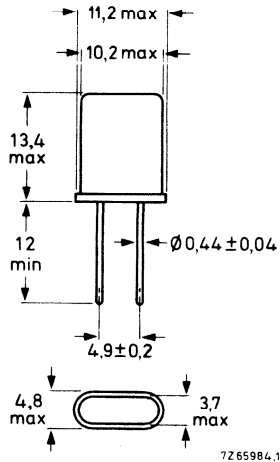

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 12 pF	4 194,304 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -10 to $+60$ °C, with respect to $+25$ °C	\pm max. 25×10^{-6}
Motional capacitance (C_1)	typ. 11,6 fF
Parallel capacitance (C_0)	typ. 2,9 pF
Resonance resistance	max. 35Ω , typ. 20Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+22 \times 10^{-6} \times f_L/\rho F$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4 000,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General purpose, e.g. digital tuning.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

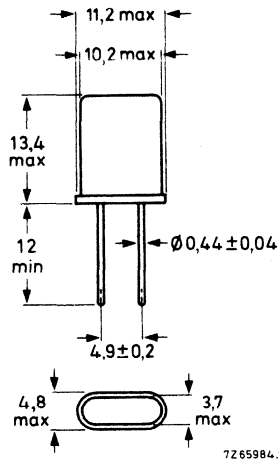

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω.

Load resonance frequency f_L , load capacitance 30 pF	4 000,000 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -10 to $+60$ °C, with respect to $+25$ °C	\pm max. 25×10^{-6}
Motional capacitance (C_1)	typ. 11 fF
Parallel capacitance (C_0)	typ. 2,8 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+5 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60$ °C

TESTS AND REQUIREMENTS

See page B2.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	6 000,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Teletext and Viewdata.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

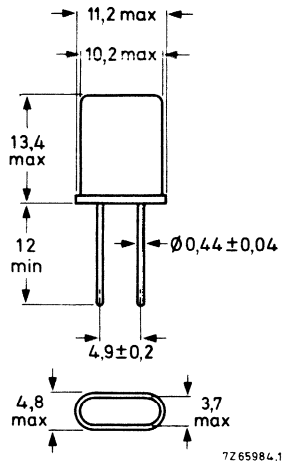

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 20 pF	6 000,000 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 30×10^{-6}
Motional capacitance (C_1)	typ. 28 fF
Parallel capacitance (C_0)	typ. 7,1 pF
Resonance resistance	max. 60Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+16 \times 10^{-6} \times f_L/pF$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4905,021 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Video cassette recorders.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines



Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,
load capacitance 20 pF

4905,021 kHz

Adjustment tolerance

\pm max. 40×10^{-6}

Tolerance over the temperature
range of -20 to $+70$ °C, with
respect to $+25$ °C

\pm max. 30×10^{-6}

Motional capacitance (C_1)

typ. 22,9 fF

Parallel capacitance (C_0)

typ. 5,9 pF

Resonance resistance

max. 60Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+13 \times 10^{-6} \times f_L/pF$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4915,200 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

PLL speed control in record players and tape recorders (high accuracy).


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

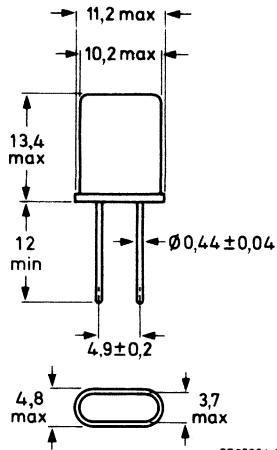

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L load capacitance 30 pF	4915,200 kHz
Adjustment tolerance	$\pm \text{max. } 20 \times 10^{-6}$
Tolerance over the temperature range of + 5 to + 45 °C, with respect to + 25 °C	$\pm \text{max. } 20 \times 10^{-6}$
Motional capacitance (C_1)	typ. 13,6 fF
Parallel capacitance (C_0)	typ. 3,2 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+ 5 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	+ 5 to + 45 °C

TESTS AND REQUIREMENTS

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	5120,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Car radios.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

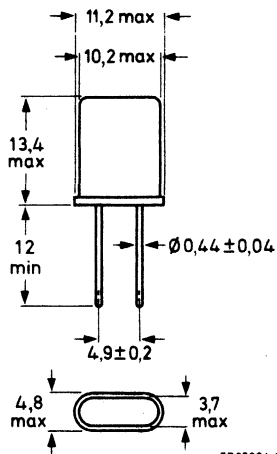

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,
load capacitance 20 pF

5120,000 kHz

Adjustment tolerance

 \pm max. 40×10^{-6}

Tolerance over the temperature
range of -20 to $+70$ °C, with
respect to $+25$ °C

 \pm max. 30×10^{-6} Motional capacitance (C_1)

typ. 14,6 fF

Parallel capacitance (C_0)

typ. 3,5 pF

Resonance resistance

max. 60Ω Pullability ($-\frac{df}{dC}$) at f_L

with load capacitance variation

min. $+11 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -20 to $+70$ °C

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4915,200 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

PLL speed control in record players and tape recorders (standard accuracy).


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

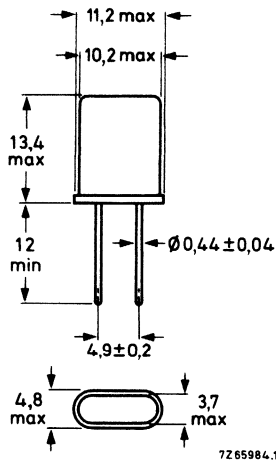

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω

Load resonance frequency f_L , load capacitance 30 pF	4915,200 kHz
Adjustment tolerance	\pm max. 2000×10^{-6}
Tolerance over the temperature range of + 5 to + 45 °C, with respect to + 25 °C	\pm max. 20×10^{-6}
Motional capacitance (C_1)	typ. 13,6 fF
Parallel capacitance (C_0)	typ. 3,2 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+ 5 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-5 to + 45 °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4500,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Video long play.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

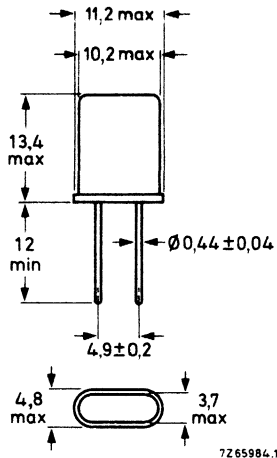

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2^\circ\text{C}$ and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,
load capacitance 13 pF

4500,000 kHz

Adjustment tolerance

 $\pm \text{max. } 30 \times 10^{-6}$

Tolerance over the temperature
range of -10 to $+65^\circ\text{C}$, with
respect to $+25^\circ\text{C}$

 $\pm \text{max. } 7 \times 10^{-6}$ Motional capacitance (C_1)

typ. 18,4 fF

Parallel capacitance (C_0)

typ. 5,6 pF

Resonance resistance

max. 60Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+22 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -10 to $+65^\circ\text{C}$ **TESTS AND REQUIREMENTS**

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4531,468 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Video long play.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

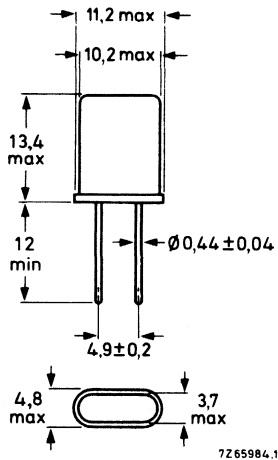

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2 \text{ }^\circ\text{C}$ and a level of drive of 0,5 mW related to $25 \text{ } \Omega$.

Load resonance frequency f_L ,
load capacitance 13 pF

4531,468 kHz

Adjustment tolerance

 $\pm \text{max. } 30 \times 10^{-6}$

Tolerance over the temperature
range of -10 to $+65 \text{ }^\circ\text{C}$, with
respect to $+25 \text{ }^\circ\text{C}$

 $\pm \text{max. } 7 \times 10^{-6}$ Motional capacitance (C_1)

typ. 18,4 fF

Parallel capacitance (C_0)

typ. 5,6 pF

Resonance resistance

max. 60 Ω

Pullability $\left(-\frac{df}{dC} \right)$ at f_L

with load capacitance variation

min. $+22 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -10 to $+65 \text{ }^\circ\text{C}$ **TESTS AND REQUIREMENTS**

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	5000,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Television cameras, video cassette recorders.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

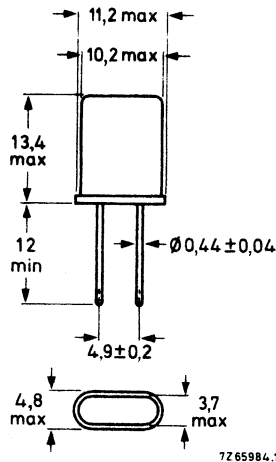

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω .

Load resonance frequency f_L ,
load capacitance 20 pF

5000,000 kHz

Adjustment tolerance

 \pm max. 40×10^{-6}

Tolerance over the temperature
range of -20 to $+70$ °C, with
respect to $+25$ °C

 \pm max. 30×10^{-6} Motional capacitance (C_1)

typ. 14,4 fF

Parallel capacitance (C_0)

typ. 3,3 pF

Resonance resistance

max. 60 Ω

Pullability ($-\frac{df}{dC}$) at f_L

with load capacitance variation

min. $+11 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -20 to $+70$ °C

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	7151,223 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier oscillator in colour television sets according to the PAL-M system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

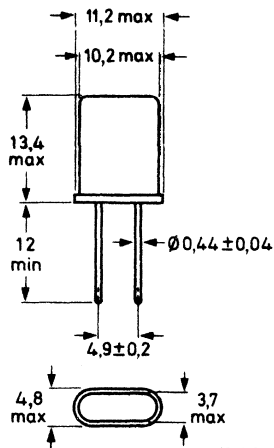

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω.

Load resonance frequency f_L ,
load capacitance 20 pF

7151,223 kHz

Adjustment tolerance

± max. 40×10^{-6}

Tolerance over the temperature
range of -10 to $+60$ °C, with
respect to $+25$ °C

± max. 25×10^{-6} Motional capacitance (C_1)

typ. 19,5 fF

Parallel capacitance (C_0)

typ. 4,4 pF

Resonance resistance

max. 60 Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+14 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -10 to $+60$ °C**TESTS AND REQUIREMENTS**

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	7159,090 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier oscillator in colour television sets according to the NTSC-M system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

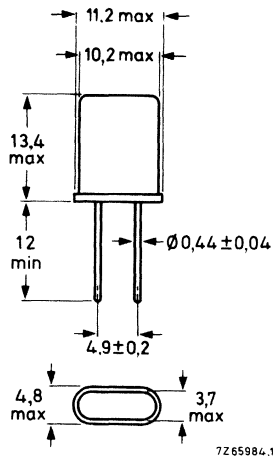

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω.

Load resonance frequency f_L , load capacitance 20 pF	7159,090 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -10 to $+60$ °C, with respect to $+25$ °C	\pm max. 25×10^{-6}
Motional capacitance (C_1)	typ. 19,5 fF
Parallel capacitance (C_0)	typ. 4,4 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+14 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	7164,112 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier oscillator in colour television sets according to the PAL-N system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

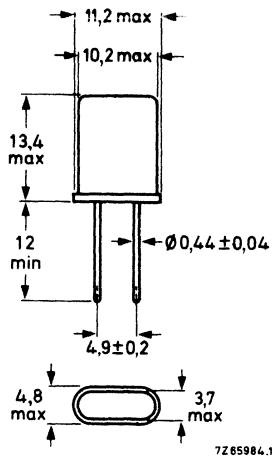

Mass 1 g approximately

Marking

The frequency in kHz, the last '5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2 \text{ }^\circ\text{C}$ and a level of drive of 0,5 mW related to $25 \text{ } \Omega$.

Load resonance frequency f_L	7164,112 kHz
load capacitance 20 pF	
Adjustment tolerance	$\pm \text{max. } 40 \times 10^{-6}$
Tolerance over the temperature range of -10 to $+60 \text{ }^\circ\text{C}$, with respect to $+25 \text{ }^\circ\text{C}$	$\pm \text{max. } 25 \times 10^{-6}$
Motional capacitance (C_1)	typ. 19,5 fF
Parallel capacitance (C_0)	typ. 4,4 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC} \right)$ at f_L	
with load capacitance variation	min. $+14 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60 \text{ }^\circ\text{C}$

TESTS AND REQUIREMENTS

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4782,720 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Two-tone telephone dialling (standard accuracy).


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

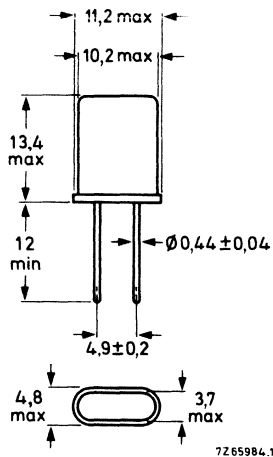

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Resonance frequency f_r	4782,720 kHz
Adjustment tolerance	\pm max. 5000×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 50×10^{-6}
Motional capacitance (C_1)	typ. 21,4 fF
Parallel capacitance (C_0)	typ. 5,7 pF
Resonance resistance	max. 60Ω
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	8000,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

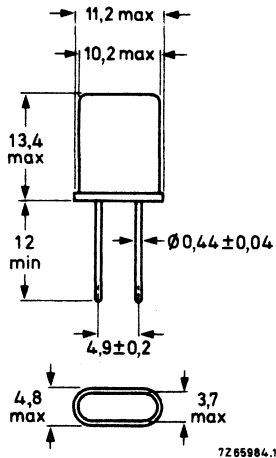

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L load capacitance 20 pF	8000,000 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 25×10^{-6}
Motional capacitance (C_1)	typ. 21 fF
Parallel capacitance (C_0)	typ. 5 pF
Resonance resistance	max. 60Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+15 \times 10^{-6} \times f_L/pF$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	6400,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

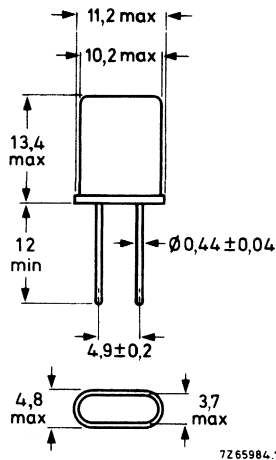

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,
load capacitance 20 pF

6400,000 kHz

Adjustment tolerance

 $\pm \text{max. } 40 \times 10^{-6}$

Tolerance over the temperature
range of -20 to $+70$ °C, with
respect to $+25$ °C

 $\pm \text{max. } 25 \times 10^{-6}$ Motional capacitance (C_1)

typ. 18 fF

Parallel capacitance (C_0)

typ. 4 pF

Resonance resistance

max. 60Ω Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+12 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -20 to $+70$ °C**TESTS AND REQUIREMENTS**

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	6144,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

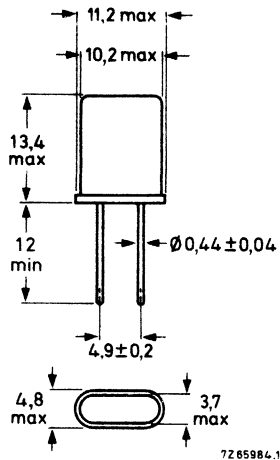

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω .

Load resonance frequency f_L , load capacitance 20 pF	6144,000 kHz
Adjustment tolerance	\pm max. 50×10^{-6}
Tolerance over the temperature range of 0 to + 70 °C, with respect to + 25 °C	\pm max. 50×10^{-6}
Motional capacitance (C_1)	typ. 17 fF
Parallel capacitance (C_0)	typ. 3,8 pF
Resonance resistance	max. 60 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+ 12 \times 10^{-6} \times f_L/pF$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-0 to + 70 °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	5068,800 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

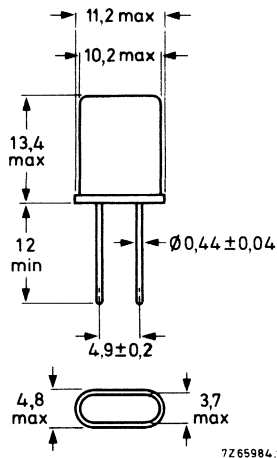

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 20 pF	5068,800 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 30×10^{-6}
Motional capacitance (C_1)	typ. 13,8 fF
Parallel capacitance (C_0)	typ. 3,2 pF
Resonance resistance	max. 60Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+12 \times 10^{-5} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4608,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

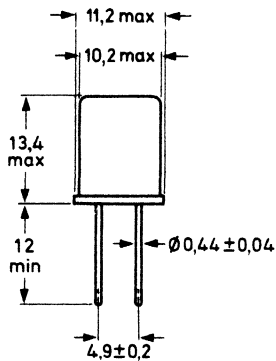

7265984.1

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Resonance frequency f_r	4608,000 kHz
Adjustment tolerance	$\pm \text{max. } 30 \times 10^{-6}$
Tolerance over the temperature range of 0 to + 70 °C, with respect to + 25 °C	$\pm \text{max. } 40 \times 10^{-6}$
Motional capacitance (C_1)	typ. 22 fF
Parallel capacitance (C_0)	typ. 5,8 pF
Resonance resistance	max. 60 Ω
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	0 to + 70 °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4406,250 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier SECAM-L system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

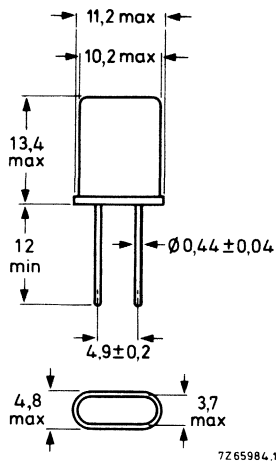

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω

Load resonance frequency f_L ,
load capacitance 20 pF

4406,250 kHz

Adjustment tolerance

 $\pm \text{max. } 40 \times 10^{-6}$

Tolerance over the temperature
range of -10 to $+60$ °C, with
respect to $+25$ °C

 $\pm \text{max. } 25 \times 10^{-6}$ Motional capacitance (C_1)

typ. 20,5 fF

Parallel capacitance (C_0)

typ. 5,1 pF

Resonance resistance

max. 60 Ω Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+15 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -10 to $+60$ °C**TESTS AND REQUIREMENTS**

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	4250,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier SECAM-L system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

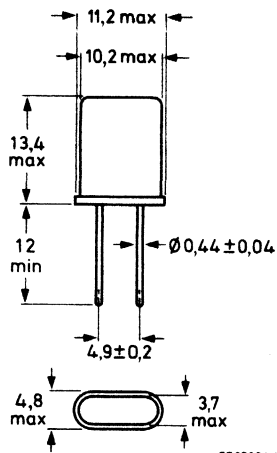

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2^\circ\text{C}$ and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L

load capacitance 20 pF

4250,000 kHz

Adjustment tolerance

$\pm \text{max. } 40 \times 10^{-6}$

Tolerance over the temperature

range of -10 to $+60^\circ\text{C}$, with
respect to $+25^\circ\text{C}$

$\pm \text{max. } 25 \times 10^{-6}$

Motional capacitance (C_1)

typ. 16 fF

Parallel capacitance (C_0)

typ. 5 pF

Resonance resistance

max. 60Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+12 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

-10 to $+70^\circ\text{C}$

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3686,400 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

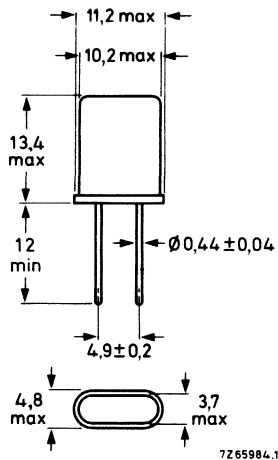

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2^\circ\text{C}$ and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,
load capacitance 30 pF

3686,400 kHz

Adjustment tolerance

 $\pm \text{max. } 40 \times 10^{-6}$

Tolerance over the temperature
range of -10 to $+60^\circ\text{C}$, with
respect to $+25^\circ\text{C}$

 $\pm \text{max. } 25 \times 10^{-6}$ Motional capacitance (C_1)

typ. 15 fF

Parallel capacitance (C_0)

typ. 4,5 pF

Resonance resistance

max. 85Ω

Pullability $\left(-\frac{df}{dC}\right)$ at f_L

with load capacitance variation

min. $+5 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage
between terminations

100 V

Operating temperature range

 -10 to $+60^\circ\text{C}$ **TESTS AND REQUIREMENTS**

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3582,056 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier oscillator in colour television sets according to the PAL-N system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

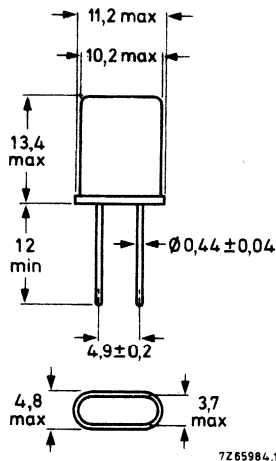

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 20 pF	3582,056 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -10 to $+60$ °C, with respect to $+25$ °C	\pm max. 25×10^{-6}
Motional capacitance (C_1)	typ. 14,7 fF
Parallel capacitance (C_0)	typ. 4,5 pF
Resonance resistance	max. 90Ω
Pullability $\left(-\frac{df}{dC} \right)$ at f_L with load capacitance variation	min. $+15 \times 10^{-6} \times f_L / \text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3579,545 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Chrominance subcarrier oscillator in colour television sets according to the NTSC-M system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

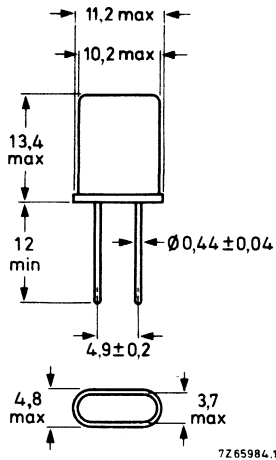

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L ,

load capacitance 20 pF

3579,545 kHz

Adjustment tolerance

\pm max. 40×10^{-6}

Tolerance over the temperature

range of -20 , to $+70$ °C, with

respect to $+25$ °C

\pm max. 30×10^{-6}

Motional capacitance (C_1)

typ. 14,7 fF

Parallel capacitance (C_0)

typ. 4,5 pF

Resonance resistance

max. 90Ω

Pullability $\left(-\frac{df}{dC} \right)$ at f_L

with load capacitance variation

min. $+15 \times 10^{-6} \times f_L/\text{pF}$

Maximum permissible d.c. voltage

between terminations

100 V

Operating temperature range

-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3579,545 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Two-tone telephone dialling system.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

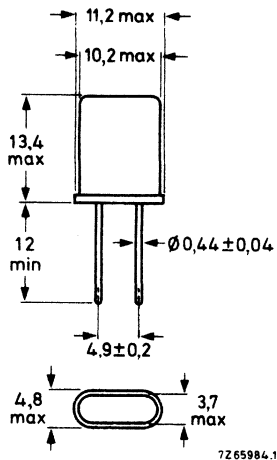

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Resonance frequency f_r	3579,545 kHz
Adjustment tolerance	\pm max. 5000×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 100×10^{-6}
Motional capacitance (C_1)	typ. 14,7 fF
Parallel capacitance (C_0)	typ. 4,5 pF
Resonance resistance	max. 90Ω
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3000,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

General, e.g. microprocessors.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

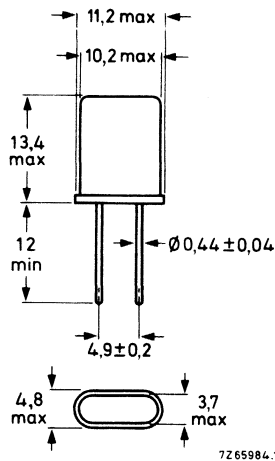

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L load capacitance 20 pF	3000,000 kHz
Adjustment tolerance	\pm max. 40×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 30×10^{-6}
Motional capacitance (C_1)	typ. 10 fF
Parallel capacitance (C_0)	typ. 4 pF
Resonance resistance	max. 100 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+6 \times 10^{-8} \times f_L/pF$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3276,800 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Timing (dividing ratio 2^{15} : 1 for 100 Hz, 2^{16} : 1 for 50 Hz).


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

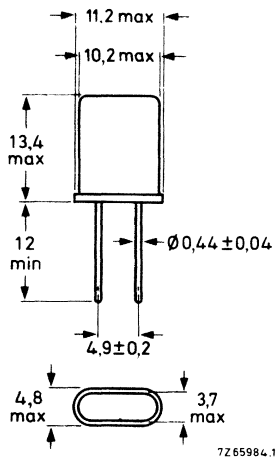

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25 Ω.

Load resonance frequency f_L , load capacitance 20 pF	3276,800 kHz
Adjustment tolerance	± max. 40×10^{-6}
Tolerance over the temperature range of -20 to + 70 °C, with respect to + 25 °C	± max. 30×10^{-6}
Motional capacitance (C_1)	typ. 11 fF
Parallel capacitance (C_0)	typ. 4,3 pF
Resonance resistance	max. 90 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+ 7 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to + 70 °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	3750,000 kHz
Mode of vibration	fundamental
Type of holder	RW-43

APPLICATION

Video long play.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

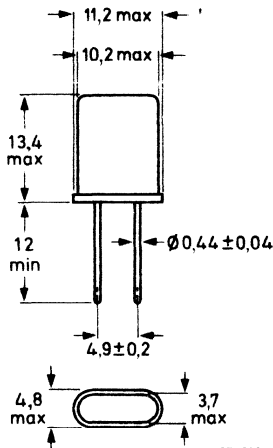

Mass 1 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 13 pF	3750,000 kHz
Adjustment tolerance	$\pm \text{max. } 30 \times 10^{-6}$
Tolerance over the temperature range of -10 to $+65$ °C, with respect to $+25$ °C	$\pm \text{max. } 7 \times 10^{-6}$
Motional capacitance (C_1)	typ. 15 fF
Parallel capacitance (C_0)	typ. 4,4 pF
Resonance resistance	max. 85Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+22 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+65$ °C

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	21480,000 kHz
Mode of vibration	fundamental
Type of holder	RW-80

APPLICATION

I.F. oscillator in small portable professional radio equipment, e.g. pagers.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

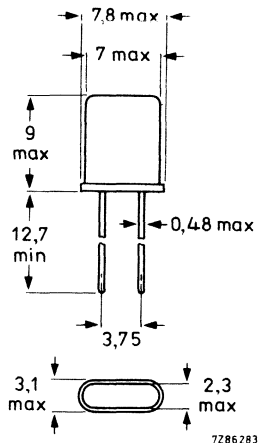

Mass 0,5 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2 \text{ }^\circ\text{C}$ and a level of drive of 0,5 mW related to $25 \text{ } \Omega$.

Load resonance frequency f_L load capacitance 32 pF	21480,000 kHz
Adjustment tolerance	$\pm \text{max. } 15 \times 10^{-6}$
Tolerance over the temperature range of -5 to $+45 \text{ }^\circ\text{C}$, with respect to $+25 \text{ }^\circ\text{C}$	$\pm \text{max. } 15 \times 10^{-6}$
Motional capacitance (C_1)	typ. 17,5 fF
Parallel capacitance (C_0)	typ. 4,6 pF
Resonance resistance	max. 40 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+5 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-5 to $+45 \text{ }^\circ\text{C}$

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	6144,000 kHz
Mode of vibration	fundamental
Type of holder	TO-39

APPLICATION

General, e.g. microprocessors.

DESCRIPTION



The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed resistance welded metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

Pin 2 is connected to the case.

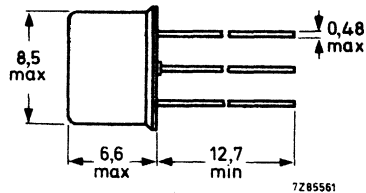

Mass 0,8 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $25 \pm 2 \text{ }^\circ\text{C}$ and a level of drive of 0,5 mW related to $25 \text{ } \Omega$.

Load resonance frequency f_L , load capacitance 20 pF	6144,000 kHz
Adjustment tolerance	$\pm \text{max. } 25 \times 10^{-6}$
Tolerance over the temperature range of -10 to $+60 \text{ }^\circ\text{C}$, with respect to $+25 \text{ }^\circ\text{C}$	$\pm \text{max. } 25 \times 10^{-6}$
Motional capacitance (C_1)	typ. 7,2 fF
Parallel capacitance (C_0)	typ. 2,2 pF
Resonance resistance	max. 75 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+6 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-10 to $+60 \text{ }^\circ\text{C}$

TESTS AND REQUIREMENTS

See page B2

QUARTZ CRYSTAL UNITS
FOR GENERAL FREQUENCY STABILIZATION
AND SPECIAL APPLICATIONS C



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	3 to 10 MHz
Mode of vibration	fundamental
Type of holder	RW-10 or RW-36

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Load capacitance C_L *	30 pF
Level of drive	0,5 mW
Motional capacitance C_1	see Fig. 1
Parallel capacitance C_0	see Fig. 1
Motional inductance L_1	see Fig. 1
Resonance resistance R_1	typ. 25 Ω
Frequency tolerance with respect to + 25 °C in temperature range:	
0 to + 60 °C	$\pm \text{max. } 30 \times 10^{-6}$
-30 to + 80 °C	$\pm \text{max. } 35 \times 10^{-6}$
+ 15 to + 45 °C	$\pm \text{max. } 10 \times 10^{-6}$
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

* Data at other C_L values and for series resonance available on request.

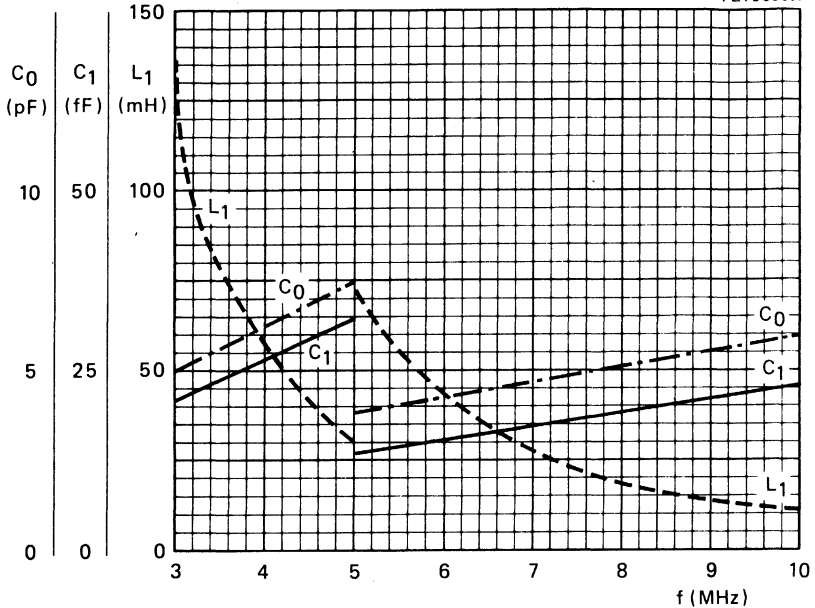


Fig. 1 Typical values for C₀, C₁ and L₁ as a function of frequency.

TESTS AND REQUIREMENTS

test	IEC-122 clause	IEC-68-2 test method	procedure	requirements
aging	2.5.17	—	30 days + 85 °C	$\Delta f/f \leq 10 \times 10^{-6}$
acceleration	2.5.12 2.5.13 2.5.14	Db		$\Delta f/f \leq 10 \times 10^{-6}$ $R_{ins} > 20 \text{ M}\Omega$ at 50 V (d.c.)
temperature cycling	—	Na	-20/+ 50 °C, 15 cycles, 1 h/cycle	$\Delta f/f \leq 5 \times 10^{-6}$
shock	2.5.2	Ea	100g sawtooth 6 directions, 1 blow/direction	$\Delta f/f \leq 5 \times 10^{-6}$ $\Delta R/R < 15\%$
vibration	2.5.3	Fc	10-55-10 Hz 2 hours*	$\Delta f/f \leq 5 \times 10^{-6}$ $\Delta R/R < 15\%$
soldering**	2.5.10	T		no visible damage, terminals well-tinned $\Delta f/f \leq 2 \times 10^{-6}$
bending of terminations**	2.5.6	Ub	1 x 90°, 5 N	no visible damage

* The batch is divided into 3 equal parts, each part is tested in 1 of the 3 perpendicular directions.

** Holder RW-10 only.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	1,8 to 25 MHz
Mode of vibration	fundamental
Type of holder	RW-36

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Load capacitance C_L^*	30 pF
Level of drive	0,5 mW
Motional capacitance C_1	5 to 30 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	see Table 1
Frequency tolerance in different temp. ranges with respect to + 25 °C	see Table 2
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests	according to MIL and IEC procedures
-------------------------------	-------------------------------------

* Data at other C_L values and for series resonance available on request.

Table 1 Resonance resistance R_1

frequency MHz	max. R_1 Ω
→ 1,800000 – 1,999999	300
2,000000 – 2,249999	250
2,250000 – 3,749999	150
3,750000 – 4,999999	100
5,000000 – 6,999999	50
7,000000 – 9,999999	30
10,000000 – 25,000000	25

Table 2 Frequency tolerance in different temperature ranges with respect to + 25 °C

frequency range MHz	temperature range °C	frequency tolerance		
		class 0	class I	class II
→ 1,8 - 25	-5/+ 45	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
	-10/+ 50	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
	-15/+ 70	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
→ 1,8 - 2,3 2,3 - 4 4 - 25	-55/+ 105	$\pm 30 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 32,5 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
→ 1,8 - 25	$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	1 to 25 MHz
Mode of vibration	fundamental
Type of holder	HC-6/U

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 20 \times 10^{-6}$
Load capacitance C_L^*	30 pF
Level of drive	0,5 mW
Motional capacitance C_1	5 to 30 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	see Table 1
Frequency tolerance in different temp. ranges with respect to + 25 °C	see Table 2
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests	according to MIL and IEC procedures
-------------------------------	-------------------------------------

* Data at other C_L values and for series resonance available on request.

Table 1 Resonance resistance R_1

frequency MHz	max. R_1 Ω
→ 1,000000 - 1,599999	600
1,600000 - 1,999999	300
2,000000 - 2,249999	250
2,250000 - 3,749999	150
3,750000 - 4,999999	100
5,000000 - 6,999999	50
7,000000 - 9,999999	30
10,000000 - 25,000000	25

Table 2 Frequency tolerance in different temperature ranges with respect to + 25 °C

frequency range MHz	temperature range °C	frequency tolerance		
		class 0	class I	class II
1 - 25	-5/+ 45	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
	--10/+ 50	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
	-15/+ 70	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
1 - 2,3 2,3 - 4	-55/+ 105	$\pm 30 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 32,5 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
4 - 25	-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
1 - 25	$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	1000,000 kHz
Mode of vibration	fundamental
Type of holder	HC-6/U

APPLICATION

General purpose.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in solder sealed metal holder, provided with two connecting leads.

MECHANICAL DATA

Dimensions in mm

Outlines

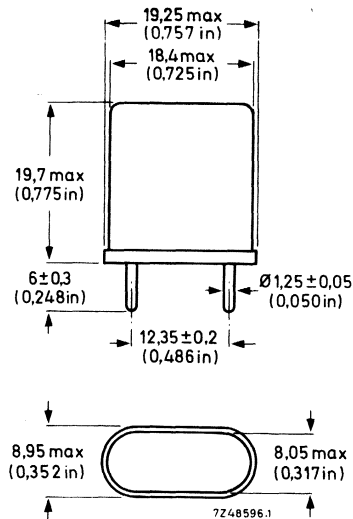

Mass 4 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit can be soldered directly onto a printed-wiring board.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of 25 ± 2 °C and a level of drive of 0,5 mW related to 25Ω .

Load resonance frequency f_L , load capacitance 30 pF	1000,000 kHz
Adjustment tolerance	\pm max. 20×10^{-6}
Tolerance over the temperature range of -20 to $+70$ °C, with respect to $+25$ °C	\pm max. 30×10^{-6}
Motional capacitance (C_1)	typ. 9 fF
Parallel capacitance (C_0)	typ. 3,5 pF
Resonance resistance	max. 600 Ω
Pullability $\left(-\frac{df}{dC}\right)$ at f_L with load capacitance variation	min. $+4 \times 10^{-6} \times f_L/\text{pF}$
Maximum permissible d.c. voltage between terminations	100 V
Operating temperature range	-20 to $+70$ °C



QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	1,8 to 25 MHz
Mode of vibration	fundamental
Type of holder	
1,6 to 2,3 MHz	DB (26 mm)
2,4 to 25 MHz	HC-27/U

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	2,5 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Load capacitance C_L^*	30 pF
Level of drive	0,5 mW
Motional capacitance C_1	see Figs 1 to 4
Parallel capacitance C_0	max. 7 pF, see also Fig. 1
Motional inductance L_1	see Figs 1 to 4
Resonance resistance R_1	see Table 1
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table 2
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 \pm 2 °C	$(-0,5 \text{ to } + 1) \times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

* Data at other C_L values and for series resonance available on request.

Table 1 Resonance resistance R_1

frequency MHz	max. R_1 Ω
→ 1,800000 – 1,869999	220
1,870000 – 1,999999	185
2,000000 – 2,119999	165
2,120000 – 2,249999	150
2,250000 – 2,599999	125
2,600000 – 2,999999	90
3,000000 – 3,399999	70
3,400000 – 3,749999	52
3,750000 – 3,999999	45
4,000000 – 4,999999	37
5,000000 – 6,999999	25
7,000000 – 9,999999	20
10,000000 – 14,999999	18
15,000000 – 25,000000	15

Table 2, Frequency tolerance in different temperature ranges with respect to + 25 °C

frequency range MHz	temperature range °C	frequency tolerance		
		class 0	class I	class II
→ 1,8 - 25	-5/+ 45	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
	-10/+ 50	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
	-15/+ 70	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
→ 1,8 - 2,3 2,3 - 7 7 - 25	-55/+ 105	$\pm 30 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 32,5 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
→ 1,8 - 25	$T_{nom} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

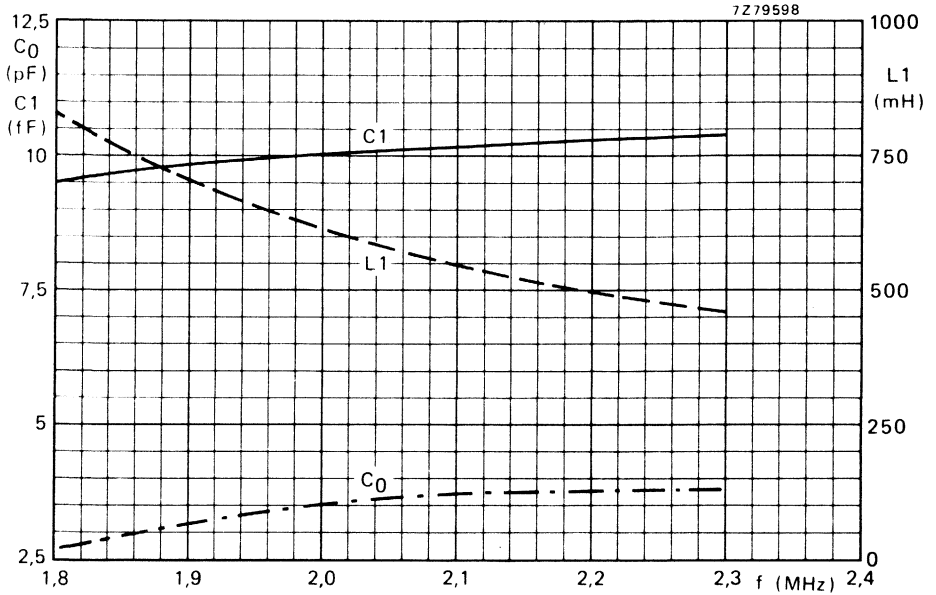


Fig. 1 Typical values for C_0 , C_1 and L_1 for frequencies from 1,8 to 2,3 MHz.

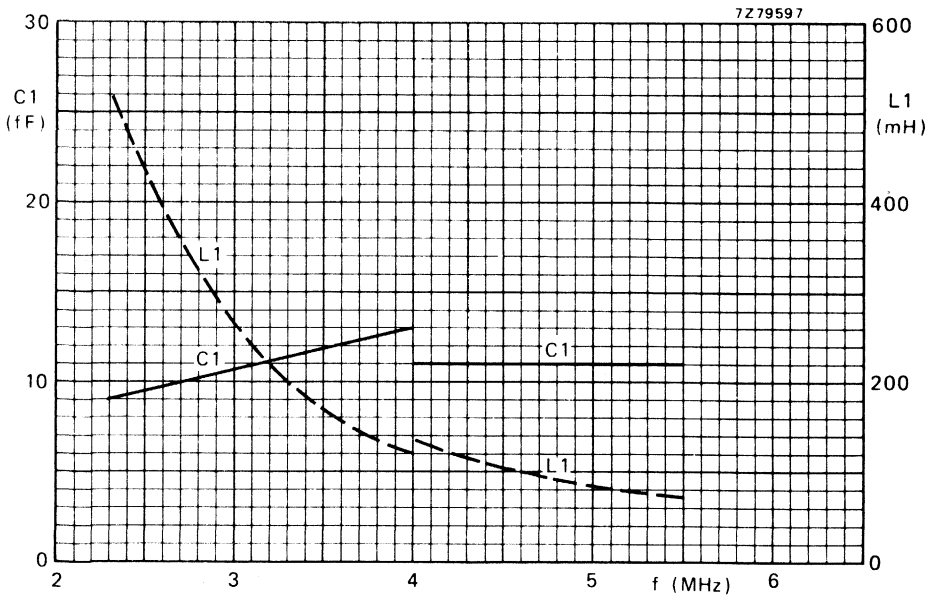


Fig. 2 Typical values for C_1 and L_1 for frequencies from 2,3 to 5,5 MHz.

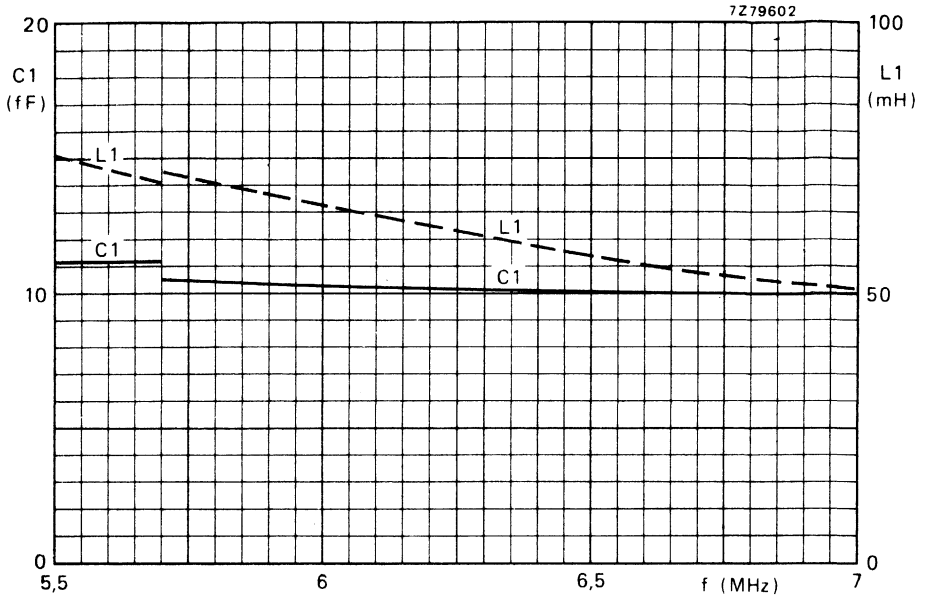


Fig. 3 Typical values for C_1 and L_1 for frequencies from 5,5 to 7 MHz.

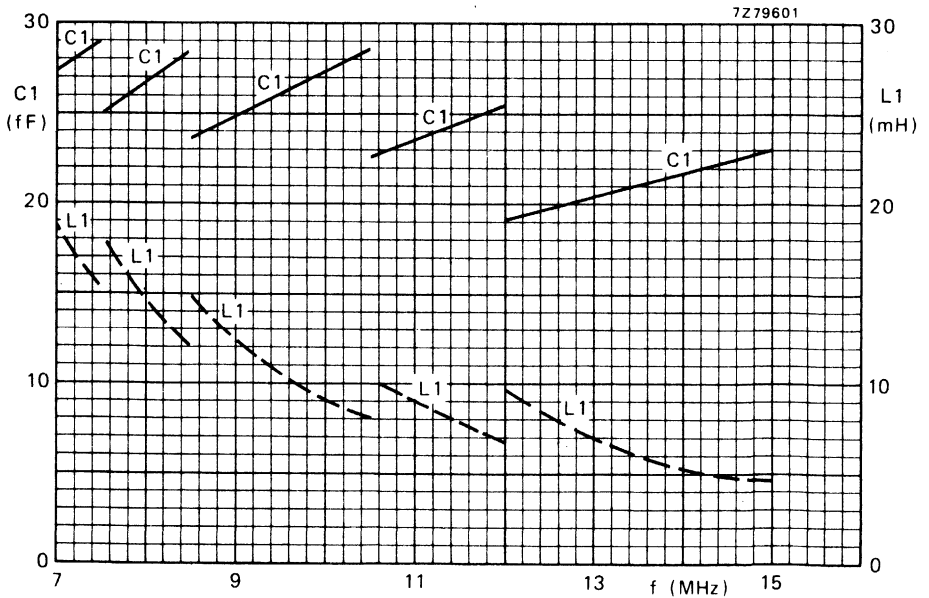


Fig. 4 Typical values for C_1 and L_1 for frequencies from 7 to 15 MHz.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	4,5 to 25 MHz	←
Mode of vibration	fundamental	
Type of holder	HC-26/U or HC-29/U	

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	0,8 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Load capacitance C_L^*	30 pF
Level of drive	0,5 mW
Motional capacitance C_1	} see Figs 1 and 2
Parallel capacitance C_0	
Motional inductance L_1	} see Table 1
Resonance resistance R_1	
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table 2
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 ± 2 °C	$(-0,5 \text{ to } + 1) \times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

* Data at other C_L values and for series resonance available on request.

Table 1 Resonance resistance R_1

frequency MHz	max. R_1 Ω
→ 4,500000 – 4,749999	110
4,750000 – 5,999999	70
6,000000 – 6,999999	45
7,000000 – 9,999999	30
10,000000 – 14,999999	25
15,000000 – 25,000000	20

Table 2 Frequency tolerance in different temperature ranges with respect to + 25 °C

frequency range MHz	temperature range °C	frequency tolerance		
		class 0	class I	class II
→ 4,5 - 25	-5/+ 45	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
	-10/+ 50	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
	-15/+ 70	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
→ 4,5 - 6 6 - 12 12 - 25	-55/+ 105	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$	$\pm 50 \times 10^{-6}$
	-55/+ 105	$\pm 32,5 \times 10^{-6}$	$\pm 35 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
	-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
→ 4,5 - 25	$T_{nom} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

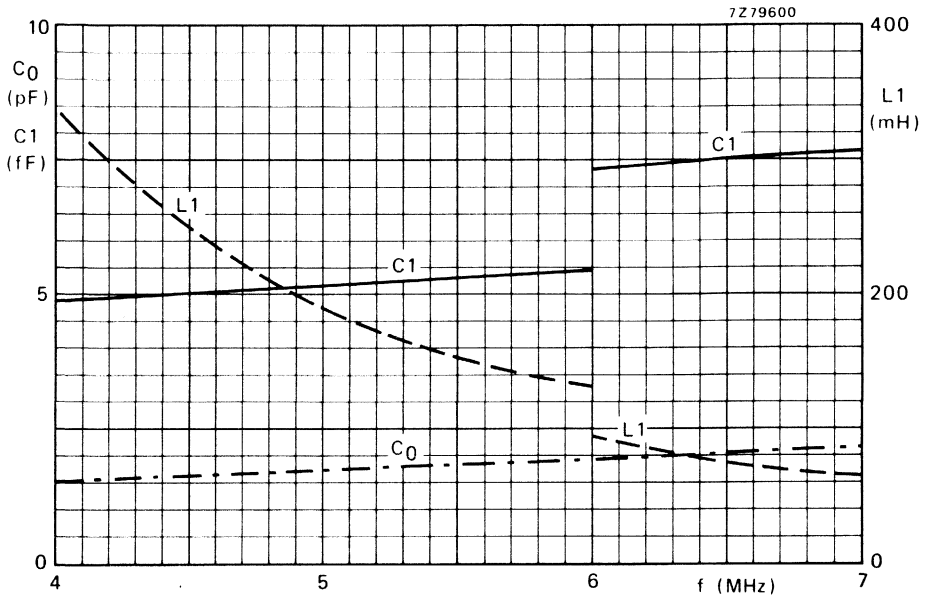


Fig. 1 Typical values of L_1 , C_0 and C_1 for frequencies from 4 to 7 MHz.

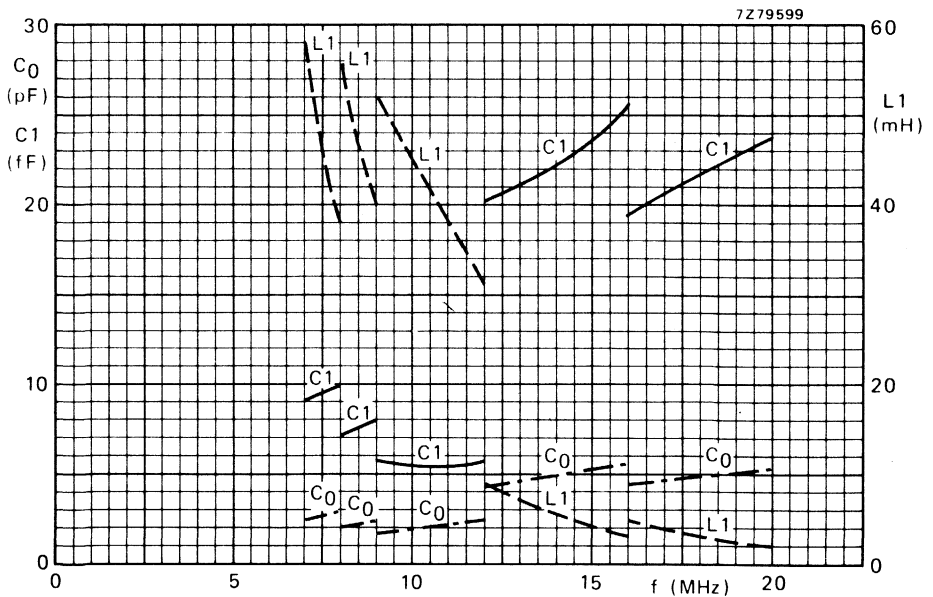


Fig. 2 Typical values of L_1 , C_0 and C_1 for frequencies from 7 to 20 MHz.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	4,5 to 25 MHz	←
Mode of vibration	fundamental	
Type of holder	RW-43 or RW-42	

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 1 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$	←
Load capacitance C_L *	30 pF	
Level of drive	0,5 mW	
Motional capacitance C_1	5 to 30 fF	
Parallel capacitance C_0	max. 7 pF	
Resonance resistance R_1		
4 to 7 MHz	max. 80 Ω	
7 to 25 MHz	max. 40 Ω	
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table	
Maximum permissible d.c. voltage between terminations	100 V	
Aging	within adjustment tolerance	

* Data at other C_L values and for series resonance available on request.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 45	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 50	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-15/+ 70	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom.} \pm 5$	$\pm 5 \times 10^{-6}$		

TESTS AND REQUIREMENTS

test	IEC-122 clause	IEC-68-2 test method	procedure	requirements
aging	2.5.17	—	30 days + 85 °C	$\Delta f/f \pm < 10 \times 10^{-6}$
damp heat, accelerated	2.5.12 2.5.13 2.5.14	D	—	$\Delta f/f \pm < 10 \times 10^{-6}$ $R_{ins} > 20 M\Omega$ at 50 V d.c.
temperature cycling	—	Na	-20/+ 50 °C, 15 cycles, 1 h/cycle	$\Delta f/f \pm < 5 \times 10^{-6}$
shock	2.5.2	Ea	100g sawtooth 6 directions, 1 blow/direction	$\Delta f/f \pm < 5 \times 10^{-6}$ $\Delta R \pm < 15\%$
vibration	2.5.3	Fc	10-55-10 Hz 2 h *	$\Delta f/f \pm < 5 \times 10^{-6}$ $\Delta R \pm < 15\%$
soldering**	2.5.10	T	—	no visible damage, terminals well-tinned $\Delta f/f \pm < 2 \times 10^{-6}$
bending of terminations**	2.5.6	Ub	1 x 90°, 5 N	no visible damage

* The batch is divided into 3 equal parts, each part is tested in 1 of the 3 perpendicular directions.

** Holder RW-43 only.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	10 to 75 MHz
Mode of vibration	third overtone
Type of holder	HC-6/U

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 20 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 1,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 60 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

→ Frequency range	10 to 75 MHz
Mode of vibration	third overtone
Type of holder	HC-27/U

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 2,5 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 1,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 40 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 \pm 2 °C	$(-0,5 \text{ to } + 1) \times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{\text{nom}} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Nominal frequency	10,00000 MHz	←
Mode of vibration	third overtone	
Type of holder	all-glass, HC-27/U	

APPLICATION

For frequency stabilization in circuits in which a high stability and a low series resistance are required.


DESCRIPTION

The unit consists of a metal-plated AT-cut quartz plate, mounted in a hermetically sealed, evacuated glass holder, provided with two connecting pins.

MECHANICAL DATA

Dimensions in mm

Outlines

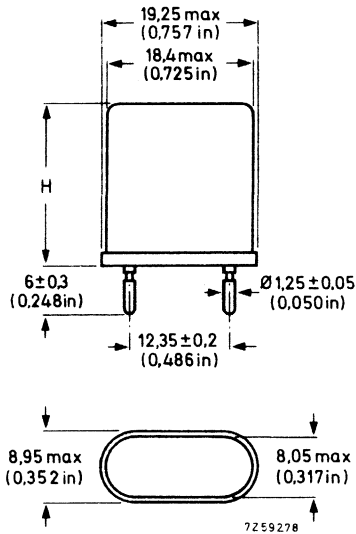

Mass 2,5 g approximately

Marking

The frequency in kHz, the last 5 digits of the catalogue number, and a code for the date of manufacture are stamped on the holder.

Mounting

The unit is provided with pins for socket mounting.

ELECTRICAL DATA

Unless otherwise specified the values apply at a temperature of $+25 \pm 2$ °C and a level of drive of 1 mA.*

Load resonance frequency f_L ,
load capacitance 75 pF** 10,000 00 MHz

Adjustment tolerance \pm max. 5×10^{-6}

→ Tolerance over the temperature range of +69 to +71 °C,
with respect to +70 °C \pm max. 3×10^{-7}

Motional capacitance (C_1) typ. 2,1 fF

Parallel capacitance (C_0) typ. 5 pF

Motional inductance (L_1) typ. 120 mH

Resonance resistance over the temperature range of
-40 to +75 °C max. 40 Ω

Maximum permissible d.c. voltage between terminations 100 V

Aging $\pm 5 \times 10^{-8}$ /month

Operating temperature range -40 to +75 °C

Stability of oscillator frequency. This depends on the crystal oven used. Stability figures of 1×10^{-6} to 1×10^{-7} can be achieved.

TESTS AND REQUIREMENTS

According to MIL-C-3098C. $\Delta f/f$ \pm max. 3×10^{-6}
 $\Delta R/R$ \pm max. 15%

* Influence of drive level on frequency is max. 2×10^{-8} /dB.

** Data at other C_L and for series resonance available on request.

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	20 to 75 MHz	←
Mode of vibration	third overtone	
Type of holder	HC-26/U or HC-29/U	

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 0,8 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 1,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 30 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 \pm 2 °C	(-0,5 to + 1) $\times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

→ Frequency range	17 to 75 MHz
Mode of vibration	third overtone
Type of holder	RW-43 or RW-42

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 1 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 1,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 40 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	10 to 75 MHz	←
Mode of vibration	third overtone	
Type of holder	RW-36	

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 1,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 60 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	50 to 125 MHz
Mode of vibration	fifth overtone
Type of holder	HC-6/U

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 4 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 20 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 0,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	20 to 100 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	50 to 125 MHz
Mode of vibration	fifth overtone
Type of holder	HC-27/U

MECHANICAL DATA

Outlines	See general section (A) "Holders".
Mass	2,5 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 0,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	max. 50 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 \pm 2 °C	$(-0,5 \text{ to } + 1) \times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{\text{nom}} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	50 to 125 MHz
Mode of vibration	fifth overtone
Type of holder	HC-26/U or HC-29/U

MECHANICAL DATA

Outlines See general section (A) "Holders"

Mass 0,8 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 0,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	
50 to 90 MHz	max. 50 Ω
90 to 125 MHz	max. 70 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging after 90 days non-operative at + 85 \pm 2 °C	$(-0,5 \text{ to } + 1) \times 10^{-6}$

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{\text{nom}} \pm 5$		$\pm 2,5 \times 10^{-6}$	$\pm 5 \times 10^{-6}$

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	50 to 125 MHz
Mode of vibration	fifth overtone
Type of holder	RW-43 or RW-42

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 1 g

ELECTRICAL DATA

Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 0,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	
50 to 90 MHz	max. 60 Ω
90 to 125 MHz	max. 80 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

QUARTZ CRYSTAL UNIT

QUICK REFERENCE DATA

Frequency range	50 to 125 MHz
Mode of vibration	fifth overtone
Type of holder	RW-36

MECHANICAL DATA

Outlines See general section (A) "Holders".

Mass 4 g

ELECTRICAL DATA

→ Adjustment tolerance at + 25 °C	$\pm 10 \times 10^{-6}$
Level of drive	0,5 mW
Motional capacitance C_1	typ. 0,5 fF
Parallel capacitance C_0	max. 7 pF
Resonance resistance R_1	20 to 100 Ω
Frequency tolerance in different temperature ranges with respect to + 25 °C	see Table
Maximum permissible d.c. voltage between terminations	100 V
Aging	within the adjustment tolerance

TESTS

Mechanical and climatic tests according to MIL and IEC procedures.

Table Frequency tolerance in different temperature ranges with respect to + 25 °C

temperature range °C	frequency tolerance		
	class 0	class I	class II
-5/+ 50	$\pm 5 \times 10^{-6}$	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$
-10/+ 60	$\pm 7,5 \times 10^{-6}$	$\pm 10 \times 10^{-6}$	$\pm 15 \times 10^{-6}$
-20/+ 70	$\pm 10 \times 10^{-6}$	$\pm 13 \times 10^{-6}$	$\pm 20 \times 10^{-6}$
-55/+ 105	$\pm 25 \times 10^{-6}$	$\pm 30 \times 10^{-6}$	$\pm 40 \times 10^{-6}$
$T_{nom} \pm 5$	$\pm 5 \times 10^{-6}$		

TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS

D



Survey of types
Data sheets

D2
D3

SURVEY OF TYPES

frequency range MHz	type	temperature range °C	frequency tolerance $\times 10^{-6}$	supply voltage 12 V \pm . . %	adjustable with external trimmer	basic catalogue number
4,5 to 15	A	0 to +50	± 1	20	no	4322 190
	B	-10 to +60	$\pm 1,5$	20		
	C	-20 to +70	± 2	20		
4,5 to 15	A	0 to +50	± 1	20	yes	4322 191
	B	-10 to +60	$\pm 1,5$	20		
	C	-20 to +70	± 2	20		
20 to 50	A	0 to +50	± 1	2	yes	4322 195
	B	-20 to +70	± 2	2		
	C	0 to +50	± 2	10		
	D	-20 to +70	± 3	10		

TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR

QUICK REFERENCE DATA

Frequency range	4,5 - 15 MHz *
Frequency tolerance/temperature range	
type A	$\pm 1 \times 10^{-6}/0$ to $+ 50$ °C
type B	$\pm 1,5 \times 10^{-6}/-10$ to $+ 60$ °C
type C	$\pm 2 \times 10^{-6}/-20$ to $+ 70$ °C
Aging	$\pm 1 \times 10^{-6}$ per year
Correction on aging (fixed step)	typ. -2×10^{-6}

APPLICATION

Temperature compensated crystal oscillators (TCXOs) are used in mobilophones, electronic timing devices, measuring equipment, synthesizers, etc.

DESCRIPTION

A TCXO module comprises a quartz crystal oscillator, and a thermally controlled circuit that compensates for frequency changes over the whole temperature range. The metal housing is filled with dry nitrogen and hermetically sealed. The unit is provided with 5 connecting pins which are arranged to fit printed-wiring boards with a grid pitch of 2,54 mm (see Fig. 1).

MECHANICAL DATA

Dimensions (mm) and terminal location

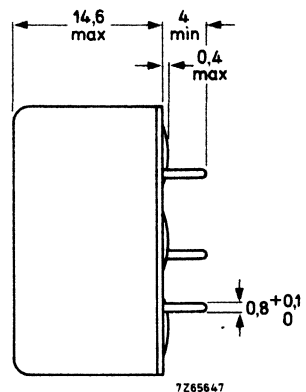
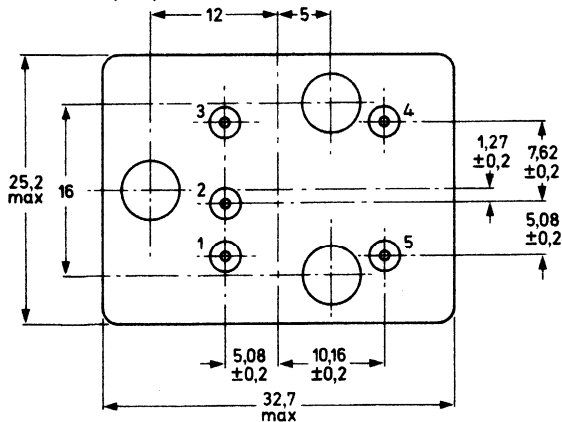


Fig. 1.

* TCXOs type C with the following frequencies can be ordered under catalogue number stated:

5 MHz cat. no. 4322 190 00010

8 MHz cat. no. 4322 190 00020

10 MHz cat. no. 4322 190 00000

TCXOs with other frequencies can be ordered under number 4322 190 stating the required frequency.

Mass

25 g approximately

Marking

The units are provided with a label showing the following information:

TCXO	Type 4322 190
Frequency	MHz
Δf 25 °C	Hz
Range	°C
No.	

ELECTRICAL DATA

Supply voltage, V_s

+ 12 V \pm 10% via $R_1 = 470 \Omega$ (see Fig. 2)
 + 12 V \pm 20% via $R_1 = 330 \Omega$

Power consumption

max. 200 mW

Frequency range

4,5 - 15 MHz

Frequency tolerance/temperature range
 at specified V_s , Z_L , and
 at a temp. rate of max. 1 °C/min.

- type A
- type B
- type C

$\pm 1 \times 10^{-6}/0$ to + 50 °C
 $\pm 1,5 \times 10^{-6}/-10$ to + 60 °C
 $\pm 2 \times 10^{-6}/-20$ to + 70 °C

Aging

$\pm 1 \times 10^{-6}$ per year

Correction on aging influence by
 connecting pin 3 to pin 2

-2^{+1}
 $-0,5 \times 10^{-6}$

Internal resistance, R_i

2800 $\Omega \pm 5\%$

Internal capacitance, C_i

5,5 pF $\pm 5\%$

Internal voltage source, V_i

600 mV $\pm 40\%$

Load impedance, Z_L

min. 500 Ω

Output voltage, V_o

see Figs 3 and 4

Storage temperature range

-25 to + 85 °C

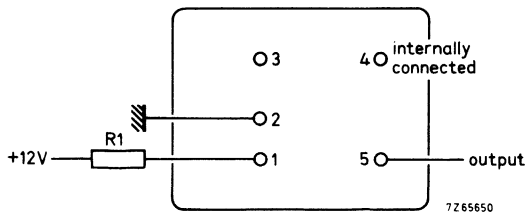


Fig. 2 Connection diagram.




Fig. 3 Equivalent circuit.

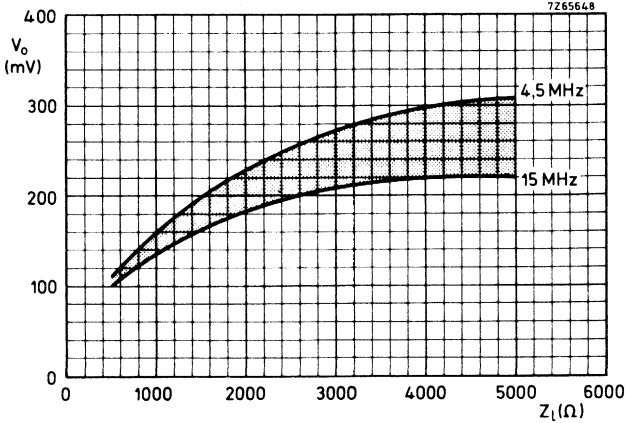


Fig. 4 Output voltage as a function of load impedance (typical values).

ENVIRONMENTAL TESTS AND REQUIREMENTS

IEC 68-2 test method	test	procedure	requirements
Ea	shock	50g, 1 x, in 6 directions	$\Delta f/f$ max. 5×10^{-7}
F	vibration	10 to 500 Hz, 10g, in 3 directions, 30 min per direction	$\Delta f/f$ max. 5×10^{-7}
T	soldering		
D	climatic		$\Delta f/f$ max. 5×10^{-7}

Note

Other specifications for TCXOs with respect to temperature range and for frequency tolerance can be made available on request.



TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR

QUICK REFERENCE DATA

Frequency range	4,5 to 15 MHz *
Frequency tolerance/temperature range	
type A	$\pm 1 \times 10^{-6}/0$ to + 50 °C
type B	$\pm 1,5 \times 10^{-6}/-10$ to + 60 °C
type C	$\pm 2 \times 10^{-6}/-20$ to + 70 °C
Aging	$\pm 1 \times 10^{-6}$ per year
Frequency adjustable with external trimmer	

APPLICATION


Temperature compensated crystal oscillators (TCXOs) are used in mobile phones, electronic timing devices, measuring equipment, synthesizers, etc.

DESCRIPTION

A TCXO module comprises a quartz crystal oscillator, and a thermally controlled circuit that compensates for frequency changes over the whole temperature range. The metal housing is filled with dry nitrogen and hermetically sealed. The unit is provided with 5 connecting pins which are arranged to fit printed-wiring boards with a grid pitch of 2,54 mm (see Fig. 1).

MECHANICAL DATA

Dimensions (mm) and terminal location

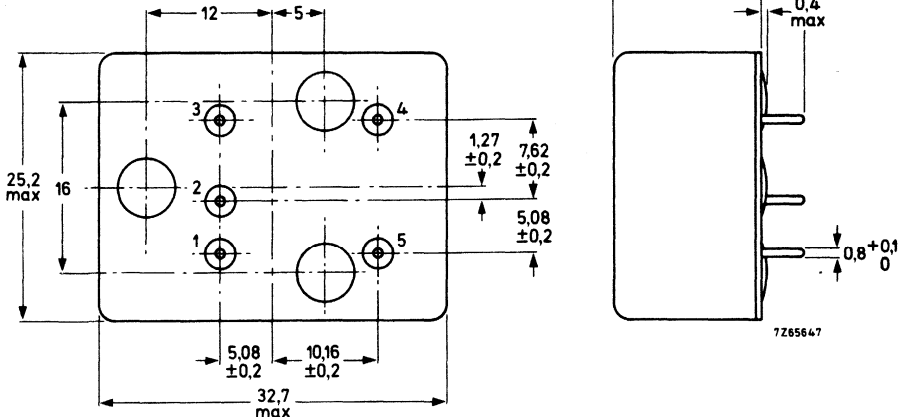

* TCXOs type C with the following frequencies can be ordered under catalogue number stated below: ←

4,194304 MHz cat. no. 4322 191 00030	5 MHz cat. no. 4322 191 00010
4,433619 MHz cat. no. 4322 191 00040	8 MHz cat. no. 4322 191 00020
	10 MHz cat. no. 4322 191 00000

TCXOs with other frequencies can be ordered under number 4322 191 stating the required frequency.

Mass

25 g approximately

Marking

The units are provided with a label showing the following information:

TCXO	Type 4322 191
Frequency	MHz
Δf 25 °C	Hz
Range	°C
No.	

ELECTRICAL DATA

Supply voltage, V_S	+ 12 V \pm 10% via $R_1 = 470 \Omega$ (see Fig. 2) + 12 V \pm 20% via $R_1 = 330 \Omega$
Power consumption	max. 200 mW
Frequency range	4,5 - 15 MHz
Frequency tolerance/temperature range after adjustment (see note), at specified V_S , Z_L , and at a temperature rate of max. 1 °C/min	
→ type A	$\pm 1 \times 10^{-6}/0$ to + 50 °C
type B	$\pm 1,5 \times 10^{-6}/-10$ to + 60 °C
type C	$\pm 2 \times 10^{-6}/-20$ to + 70 °C
Aging	$\pm 1 \times 10^{-6}$ per year
Correction on aging influence	$\pm 2 \times 10^{-6}$ (see note below)
Internal resistance, R_i	2800 $\Omega \pm 5\%$
Internal capacitance, C_i	5,5 pF $\pm 5\%$
Internal voltage source, V_i	600 mV $\pm 40\%$
Load impedance, Z_L	min. 500 Ω
Output voltage, V_O	see Figs 3 and 4
Storage temperature range	-25 to + 85 °C

Note

It is not guaranteed that the nominal frequency occurs at room temperature. The nominal frequency can be shifted by connecting a variable capacitor of max. 60 pF externally between pin 2 and 3. For optimum stability over the whole temperature range the oscillator should be adjusted at room temperature to a frequency which deviates from the nominal one by an amount mentioned as " Δf 25 °C ... Hz" on the label on the module. After this adjustment a trimming range of \pm min. 2×10^{-6} is still available to correct aging influences.

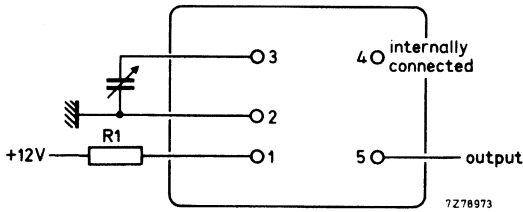


Fig. 2 Connection diagram.




Fig. 3 Equivalent circuit.

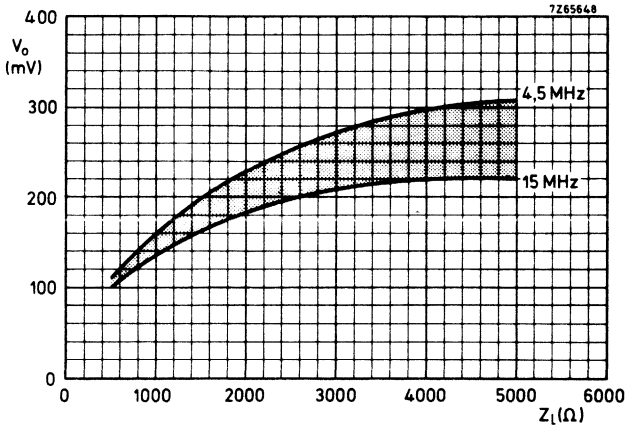


Fig. 4 Output voltage as a function of load impedance (typical values).

ENVIRONMENTAL TESTS AND REQUIREMENTS

IEC 68-2 test method	test	procedure	requirements
Ea	shock	50g, 1 x, in 6 directions	$\Delta f/f$ max. 5×10^{-7}
F	vibration	10 to 500 Hz, 10g, in 3 directions 30 min per direction	$\Delta f/f$ max. 5×10^{-7}
T	soldering		
D	climatic		$\Delta f/f$ max. 5×10^{-7}

Note

Other specifications for TCXOs with respect to temperature range and for frequency tolerance can be made available on request.

TEMPERATURE COMPENSATED CRYSTAL OSCILLATOR

QUICK REFERENCE DATA

Frequency range	20 to 50 MHz	
Supply voltage	12 V \pm 2%	12 V \pm 10%
Frequency tolerance/temp. range		
type A	$\pm 1 \times 10^{-6}/0$ to +50 °C	$\pm 2 \times 10^{-6}/0$ to +50 °C $\pm 3 \times 10^{-6}/-20$ to +70 °C
type B	$\pm 2 \times 10^{-6}/-20$ to +70 °C	
type C		
type D		
Aging	$\pm 1 \times 10^{-6}$ per year	
Frequency is adjustable with external trimmer		

APPLICATION

Temperature compensated crystal oscillators (TCXOs) are used in mobilophones, electronic timing devices, measuring equipment, synthesizers, etc.

DESCRIPTION

A TCXO module comprises a quartz crystal oscillator, and a thermally controlled circuit that compensates for frequency changes over the whole temperature range. The metal housing is filled with dry nitrogen and hermetically sealed. The unit is provided with 5 connecting pins which are arranged to fit printed-wiring boards with a grid pitch of 2,54 mm (see Fig. 1).

MECHANICAL DATA

Dimensions (mm) and terminal location

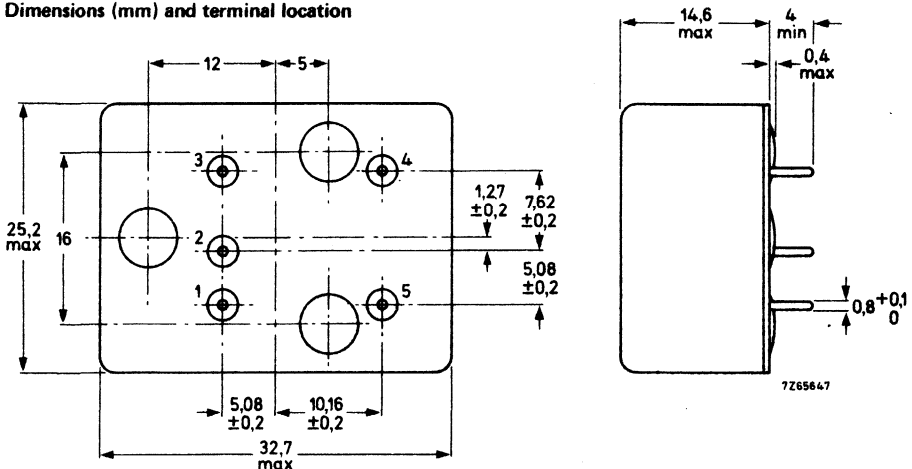


Fig. 1.

Mass

25 g approximately

Marking

The units are provided with a label showing the following information:

TCXO	Type 4322 195
Frequency	MHz
Δf 25 °C	Hz
Range	°C
No.	

ELECTRICAL DATA

Supply voltage, V_S , see Fig. 2
 types A and B
 types C and D

+ 12 V \pm max. 2%
 + 12 V \pm max. 10%

Power consumption

typ. 160 mW, max. 180 mW

Frequency range

20 to 50 MHz

Frequency tolerance/temperature range
 after adjustment (see note),
 at specified V_S , Z_L , and at a temperature
 rate of 1 °C/min

see also Fig. 4
 $\pm 1 \times 10^{-6}/0$ to + 50 °C
 $\pm 2 \times 10^{-6}/-20$ to + 70 °C
 $\pm 2 \times 10^{-6}/0$ to + 50 °C
 $\pm 3 \times 10^{-6}/-20$ to + 70 °C



type A (tol. on $V_S \pm 2\%$)
 type B (tol. on $V_S \pm 2\%$)
 type C (tol. on $V_S \pm 10\%$)
 type D (tol. on $V_S \pm 10\%$)

Aging

$\pm 1 \times 10^{-6}$ per year

Correction on aging influence

$\pm > 2 \times 10^{-6}$, see note

Internal resistance, R_i

2800 $\Omega \pm 5\%$

Internal capacitance, C_i

5,5 pF $\pm 5\%$

Internal voltage source, V_i

600 mV $\pm 40\%$

Load impedance, Z_L

min. 500 Ω

Output voltage, V_O

see Fig. 5

Storage temperature range

-25 to + 85 °C

Note

It is not guaranteed that the nominal frequency occurs at room temperature. The nominal frequency can be shifted by connecting a variable capacitor of max. 20 pF externally between pins 2 and 3. For optimum stability over the whole temperature range the oscillator should be adjusted at room temperature to a frequency which deviates from the nominal one by an amount mentioned as " Δf 25 °C ... Hz" on the label on the module. After this adjustment a trimming range of \pm min. 2×10^{-6} is still available to correct aging influences.

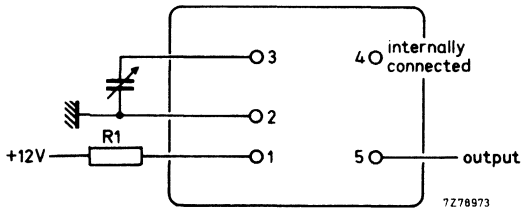


Fig. 2 Connection diagram.
R1 = 390 Ω




Fig. 3 Equivalent circuit.

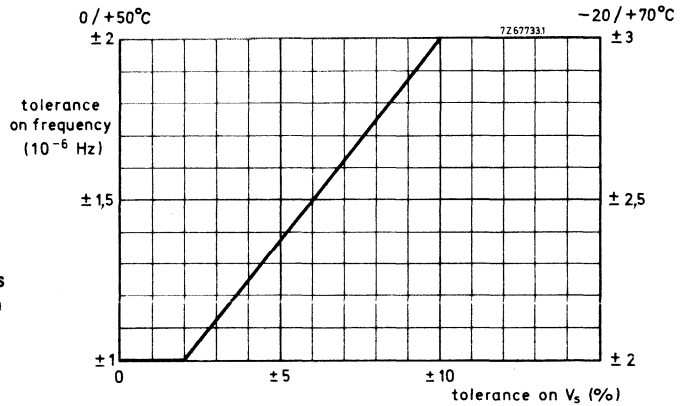


Fig. 4 Frequency tolerance as a function of the tolerance on supply voltage.

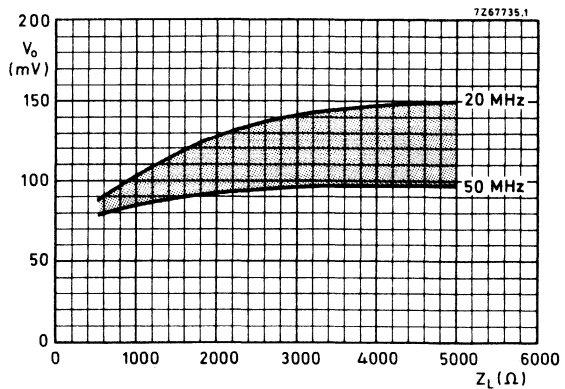


Fig. 5 Output voltage as a function of load impedance (typical values).

ENVIRONMENTAL TESTS AND REQUIREMENTS

IEC 68-2 test method	test	procedure	requirements
Ea	shock	50g, 1 x, in 6 directions	$\Delta f/f$ max. 5×10^{-7}
F	vibration	10 to 500 Hz, 10g, in 3 directions, 30 min per direction	$\Delta f/f$ max. 5×10^{-7}
T	soldering		
D	climatic		$\Delta f/f$ max. 5×10^{-7}

Note

Other TCXO specifications concerning supply voltage, temperature range and frequency tolerance can be made available on request.



COMPACT INTEGRATED OSCILLATORS

E



COMPACT INTEGRATED OSCILLATORS

dual-in-line DIL14

QUICK REFERENCE DATA

Frequency range	1,5 to 20 MHz
Frequency tolerance at + 25 °C	$\pm 50 \times 10^{-6}$
Frequency stability	$\pm 20 \times 10^{-6}$
Operating temperature range	0 to + 70 °C
Supply voltage	5 V \pm 10%
Fan-out	max. 10 standard TTL

APPLICATION

Due to their small size and hermetical sealing the oscillators can be applied in microprocessors, measuring equipment, medical equipment, electronic timing devices, etc.

DESCRIPTION

A compact integrated oscillator comprises a quartz crystal and a thin film hybrid oscillator circuit. The metal housing is filled with dry nitrogen and hermetically sealed. The unit is provided with four connecting pins having a spacing compatible with 14-pin DIL packages.

MECHANICAL DATA


Dimensions in mm

Outlines and terminal location

- pin 1 = not connected*
- pin 7 = earth
- pin 8 = output
- pin 14 = supply

For oscillators with a freq. between 1,5 and 9 MHz.
H = max. 4,9 mm.

For oscillators with a freq. between 9 and 25 MHz.
H = max. 6,6 mm.

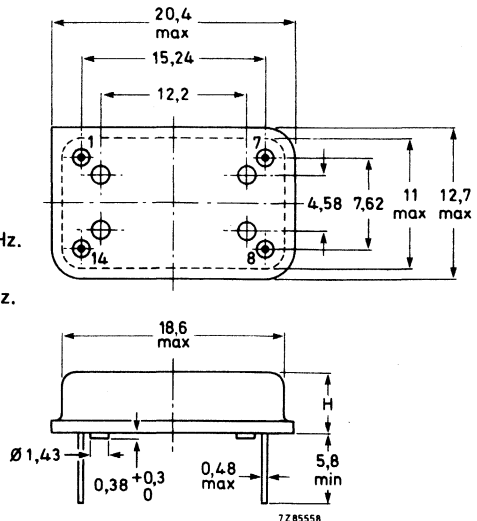

* Pin 1 can be made available for enable input on request.

Marking

The units are marked as follows:

- frequency in kHz
- last five digits of catalogue number
- code for month and year of manufacture.

Mounting

Soldering conditions max. 260 °C, max. 10 s

ELECTRICAL DATA

Supply voltage + 5 V ± 10%

Supply current

1,5 – 3 MHz

typ. 29 mA

3 – 25 MHz

typ. 12 mA

Frequency range

1,5 to 20 MHz*

Frequency tolerance at + 25 °C

± 50 × 10⁻⁶, see note

Frequency stability within

operating temperature range

± 20 × 10⁻⁶

Aging

± 1 × 10⁻⁶ per year

Fan-out

max. 10 standard TTL

Temperature range

operating

0 to + 70 °C, see note

storage

–55 to + 125 °C

ENVIRONMENTAL TESTS AND REQUIREMENTS


IEC 68–2 test method	test	procedure	requirements
Ea	shock	half-cycle sinewave 6 ms, 100g, 3 times in 3 directions	Δf/f max. 5 × 10 ⁻⁷
Fc	vibration	10–55 Hz, amplitude 0,35 mm in 3 directions, 30 min per direction	Δf/f max. 5 × 10 ⁻⁷

Note

Oscillators for other temperature ranges and with other tolerances are available on request.

* For frequencies outside this range information on request.

PIEZOELECTRIC QUARTZ DEVICES

- 
- A QUARTZ CRYSTAL UNITS
GENERAL
 - B QUARTZ CRYSTAL UNITS
FOR STANDARD APPLICATIONS
 - C QUARTZ CRYSTAL UNITS
FOR GENERAL FREQUENCY STABILIZATION
AND SPECIAL APPLICATIONS
 - D TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS
 - E COMPACT INTEGRATED OSCILLATORS

Argentina: PHILIPS ARGENTINA S.A., Div. Elcoma. Vedia 3892. 1430 BUENOS AIRES, Tel. 541-7141/7242/7343/7444/7545

Australia: PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division. 67 Mars Road. LANE COVE. 2066. N.S.W., Tel. 427 08 88

Austria: ÖSTERREICHISCHE PHILIPS BAUELEMENTE Industrie G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 62 91 11.

Belgium: M.B.L.E., 7, rue du Pavillon, B-1030 BRUXELLES, Tel. (02) 242 7400.

Brazil: IBRAPE, Caixa Postal 7383, Av. Brigadeiro Faria Lima, 1735 SAO PAULO, SP, Tel. (011) 211-2600.

Canada: PHILIPS ELECTRONICS LTD., Electron Devices Div., 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8. Tel. 292-5161.

Chile: PHILIPS CHILENA S.A., Av. Santa Maria 0760. SANTIAGO, Tel. 39-40 01.

Colombia: SADAPE S.A., P.O. Box 9805. Calle 13, No. 51 + 39. BOGOTA D.E. 1., Tel. 600 600.

Denmark: MINIWATT A/S, Emdrupvej 115A, DK-2400 KØBENHAVN NV., Tel. (01) 69 16 22.

Finland: OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. 1 72 71.

France: R.T.C. LA RADIOTECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 355-44 99.

Germany: VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-1.

Greece: PHILIPS S.A. HELLENIQUE, Elcoma Division, 52, Av. Syngrou, ATHENS, Tel. 915 311.

Hong Kong: PHILIPS HONG KONG LTD., Elcoma Div., 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0)2451 21.

India: PEICO ELECTRONICS & ELECTRICALS LTD., Ramon House, 169 Backbay Reclamation, BOMBAY 400020, Tel. 295144.

Indonesia: P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Panim Bank Building, 2nd Fl., Jl. Jend. Sudirman, P.O. Box 223, JAKARTA, Tel. 716 131.

Ireland: PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 69 33 55.

Italy: PHILIPS S.p.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2-6994.

Japan: NIHON PHILIPS CORP., Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611.
(IC Products) SIGNETICS JAPAN, LTD. TOKYO, Tel. (03)230-1521.

Korea: PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Itaewon-dong, Yongsan-ku, C.P.O. Box 3680, SEOUL, Tel. 794-4202.

Malaysia: PHILIPS MALAYSIA SDN. BERHAD, Lot 2, Jalan 222, Section 14, Petaling Jaya, P.O.B. 2163, KUALA LUMPUR, Selangor, Tel. 77 44 11.

Mexico: ELECTRONICA S.A. de C.V., Varsovia No. 36, MEXICO 6, D.F., Tel. 533-11-80.

Netherlands: PHILIPS NEDERLAND B.V., Afd. Elconco, Boschdijk 525, 5600 PB EINDHOVEN, Tel. (040) 79 33 33.

New Zealand: PHILIPS ELECTRICAL IND. LTD., Elcoma Division, 2 Wagener Place, St. Lukes, AUCKLAND, Tel. 894-160.

Norway: NORSK A/S PHILIPS, Electronica Div., Sandstuveien 70, OSLO 6, Tel. 33 62 70.

Peru: CADESA, Rocca de Vergallo 247, LIMA 17, Tel. 62 85 99.

Philippines: PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tamo, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. 86-89-51 to 59.

Portugal: PHILIPS PORTUGUESA S.A.R.L., Av. Eng. Duharte Pacheco 6, LISBOA 1, Tel. 68 31 21.

Singapore: PHILIPS PROJECT DEV. (Singapore) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 25 38 811.

South Africa: EDAC (Pty.) Ltd., 3rd Floor Rainer House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001, Tel. 614-2362/9.

Spain: MINIWATT S.A., Balmes 22, BARCELONA 7, Tel. 301 63 12.

Sweden: A.B. ELCOMA, Lidingövägen 50, S-11584 STOCKHOLM 27, Tel. 08/67 97 80.

Switzerland: PHILIPS A.G., Elcoma Dept., Allmendstrasse 140-142, CH-8027 ZURICH, Tel. 01-488 22 11.

Taiwan: PHILIPS TAIWAN LTD., 3rd Fl., San Min Building, 57-1, Chung Shan N. Rd, Section 2, P.O. Box 22978, TAIPEI, Tel. (02) 5631717.

Thailand: PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Silom Road, P.O. Box 961, BANGKOK, Tel. 233-6330-9.

Turkey: TÜRK PHILIPS TICARET A.S., EMET Department, Inonu Cad. No. 78-80, ISTANBUL, Tel. 43 59 10.

United Kingdom: MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-580 6633.

United States: (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000.
(Passive Devices) MEPCO/ELECTRA INC., Columbia Rd., MORRISTOWN, N.J. 07960, Tel. (201) 539-2000.
(Passive Devices & Electromechanical Devices) } CENTRALAB INC., 5855 N. Glen Park Rd., MILWAUKEE, WI 53201, Tel. (414) 228-7380
(IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 739-7700.

Uruguay: LUZILECTRON S.A., Avda Rondeau 1576, piso 5, MONTEVIDEO, Tel. 91 43 21.

Venezuela: IND. VENEZOLANAS PHILIPS S.A., Elcoma Dept., A. Ppal de los Ruices, Edif. Centro Colgate, CARACAS, Tel. 36 05 11.

For all other countries apply to: N.V. PHILIPS, Electronic Components and Materials Division, Corporate Relations & Projects, Building BAE3, 5600 MD EINDHOVEN, THE NETHERLANDS, Telex 35000, Tel. (040) 72 33 04

A24

1982 N.V. Philips' Gloeilampenfabrieken

This information is furnished for guidance, and with no guarantees as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced, in any way, in whole or in part, without the written consent of the publisher.