

# PHILIPS

Data handbook



Electronic  
components  
and materials

## Components and materials

Book C14

1986

### Electrolytic and solid capacitors













# ELECTROLYTIC AND SOLID CAPACITORS

|  | <i>page</i> |
|--|-------------|
| <b>Type survey</b> . . . . .               | ii          |
| <b>Selection guide</b>                     |             |
| Aluminium electrolytic capacitors. . . . . | 2           |
| Solid aluminium capacitors . . . . .       | 4           |
| <b>Introduction</b>                        |             |
| General . . . . .                          | 7           |
| Principles . . . . .                       | 7           |
| Description. . . . .                       | 8           |
| Electrical impedance. . . . .              | 10          |
| Ripple current. . . . .                    | 12          |
| D.C. leakage current. . . . .              | 12          |
| Life time . . . . .                        | 13          |
| Reliability . . . . .                      | 14          |
| Tests and requirements . . . . .           | 14          |
| <b>Device specifications</b>               |             |
| Aluminium electrolytic capacitors. . . . . | 23          |
| Solid aluminium capacitors . . . . .       | 383         |
| Maintenance types . . . . .                | 523         |
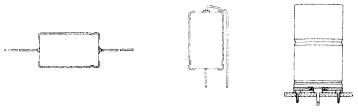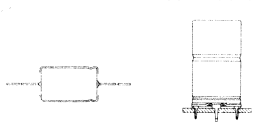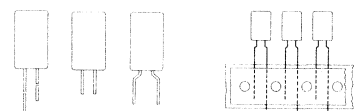
## TYPE SURVEY

| type   | application   | series number<br>2222 . . .                   | characteristic          | page           |                              |     |
|--|---|---|-------------------------|----------------|------------------------------|-----|
| <b>ALUMINIUM ELECTROLYTIC CAPACITORS</b>   |   |   |                         |                |                              |     |
|  | long-life,<br>general,<br>industrial  | 014   | low impedance; LV       | 41             |                              |     |
|  |   | 021   | small dimensions; LV    | 79             |                              |     |
|  |   | 030   | LV                      | 109            |                              |     |
|  |   | 031   |                         |                |                              |     |
|  |   | 032   |                         |                |                              |     |
|  |   | 033   |                         |                |                              |     |
|  |   | 041   | HV                      | 203            |                              |     |
|  |   | 042   |                         |                |                              |     |
|  |   | 043   |                         |                |                              |     |
|  |   | 065   | low leakage current     | 257            |                              |     |
| 117  | LV; ultra miniature   | 339   |                         |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| Miniature/small  |    | 108   | acc. to CECC; LV        | 285            |                              |     |
|  |   | 118   | 125 °C; LV              | 353            |                              |     |
|  |   | 132   | acc. to DIN 41257; LV   | 365            |                              |     |
|  |   | 133   | acc. to DIN 41257; HV   | 365            |                              |     |
|  |   |   |                         |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| Miniature/small  |     | 035   | LV                      | 153            |                              |     |
|  |   | 037   | LV                      | 187            |                              |     |
|  |   | 036   | LV                      | 171            |                              |     |
|  |   | 013   | low leakage current; LV | 25             |                              |     |
|  |   | 116   | long-life; LV           | 323            |                              |     |
|  |   |   |                         |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| Miniature; surface mounted   |    | general                                       | 085                     | LV             | 271                          |     |
| <hr/>  |   |   |                         |                |                              |     |
| Large  |   | 050   | acc. to CECC; LV        | 223            |                              |     |
|  |   | 051   | small dimensions; LV    | 247            |                              |     |
|  |   | 052   | acc. to CECC; HV        | 223            |                              |     |
|  |   | 053   | small dimensions; HV    | 247            |                              |     |
|  |   |   |                         |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| Large  |  | long-life,<br>industrial,<br>military         | 114                     | screw terminal | 299                          |     |
|  |   |   | 115                     |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| <b>SOLID ALUMINIUM CAPACITORS</b>  |   |   |                         |                |                              |     |
| Miniature  |  | very<br>long-life,<br>general,<br>industrial  | 122                     | acc. to CECC;  | 407                          |     |
|  |   |   |                         | 124            | resin dipped<br>epoxy potted | 491 |
|  |   |   |                         |                |                              |     |
| <hr/>  |   |   |                         |                |                              |     |
| Miniature/small  |  | very<br>long-life,<br>military,<br>industrial | 121                     | acc. to CECC   | 385                          |     |
|  |   |   | 123                     |                | 435                          |     |
|  |   |   | 125                     |                | 511                          |     |

## DATA HANDBOOK SYSTEM

Our Data Handbook System comprises more than 60 books with specifications on electronic components, subassemblies and materials. It is made up of four series of handbooks:

|                          |        |
|--------------------------|--------|
| ELECTRON TUBES           | BLUE   |
| SEMICONDUCTORS           | RED    |
| INTEGRATED CIRCUITS      | PURPLE |
| COMPONENTS AND MATERIALS | GREEN  |

The contents of each series are listed on pages iv to viii.

The data handbooks contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

When ratings or specifications differ from those published in the preceding edition they are indicated with arrows in the page margin. Where application information is given it is advisory and does not form part of the product specification.

Condensed data on the preferred products of Philips Electronic Components and Materials Division is given in our Preferred Type Range catalogue (issued annually).

Information on current Data Handbooks and on how to obtain a subscription for future issues is available from any of the Organizations listed on the back cover.

Product specialists are at your service and enquiries will be answered promptly.

## ELECTRON TUBES (BLUE SERIES)

The blue series of data handbooks comprises:

- T1 Tubes for r.f. heating**
- T2a Transmitting tubes for communications, glass types**
- T2b Transmitting tubes for communications, ceramic types**
- T3 Klystrons**
- T4 Magnetrons for microwave heating**
- T5 Cathode-ray tubes**  
Instrument tubes, monitor and display tubes, C.R. tubes for special applications
- T6 Geiger-Müller tubes**
- T7 Gas-filled tubes (will not be reprinted)**
- T8 Colour display systems**  
Colour TV picture tubes, colour data graphic display tube assemblies, deflection units
- T9 Photo and electron multipliers**
- T10 Plumbicon camera tubes and accessories**
- T11 Microwave semiconductors and components**
- T12 Vidicon and Newvicon camera tubes**
- T13 Image intensifiers**
- T14 Infrared detectors**
- T15 Dry reed switches**
- T16 Monochrome tubes and deflection units**  
Black and white TV picture tubes, monochrome data graphic display tubes, deflection units

} Data collations on these subjects are available now.  
Data Handbooks will be published in 1985.

## SEMICONDUCTORS (RED SERIES)

The red series of data handbooks comprises:

- S1 Diodes**  
Small-signal germanium diodes, small-signal silicon diodes, voltage regulator diodes (< 1,5 W), voltage reference diodes, tuner diodes, rectifier diodes
- S2a Power diodes**
- S2b Thyristors and triacs**
- S3 Small-signal transistors**
- S4a Low-frequency power transistors and hybrid modules**
- S4b High-voltage and switching power transistors**
- S5 Field-effect transistors**
- S6 R.F. power transistors and modules**
- S7 Surface mounted semiconductors**
- S8 Devices for optoelectronics**  
Photosensitive diodes and transistors, light-emitting diodes, displays, photocouplers, infrared sensitive devices, photoconductive devices.
- S9 Power MOS transistors**
- S10 Wideband transistors and wideband hybrid IC modules**
- S11 Microwave transistors**
- S12 Surface acoustic wave devices**

## INTEGRATED CIRCUITS (PURPLE SERIES)

The purple series of data handbooks comprises:

### EXISTING SERIES

Superseded by:

|             |   |                                 |
|-------------|---|---------------------------------|
| <b>IC1</b>  | <b>Bipolar ICs for radio and audio equipment</b>  | <b>IC01N</b>                    |
| <b>IC2</b>  | <b>Bipolar ICs for video equipment</b>  | <b>IC02Na and IC02Nb</b>        |
| <b>IC3</b>  | <b>ICs for digital systems in radio, audio and video equipment</b>  | <b>IC01N, IC02Na and IC02Nb</b> |
| <b>IC4</b>  | <b>Digital integrated circuits<br/>CMOS HE4000B family</b>  |                                 |
| <b>IC5</b>  | <b>Digital integrated circuits – ECL<br/>ECL10 000 (GX family), ECL100 000 (HX family), dedicated designs</b> | <b>IC08N</b>                    |
| <b>IC6</b>  | <b>Professional analogue integrated circuits</b>  |                                 |
| <b>IC7</b>  | <b>Signetics bipolar memories</b>   |                                 |
| <b>IC8</b>  | <b>Signetics analogue circuits</b>  | <b>IC11N</b>                    |
| <b>IC9</b>  | <b>Signetics TTL logic</b>  | <b>IC09N and IC15N</b>          |
| <b>IC10</b> | <b>Signetics Integrated Fuse Logic (IFL)</b>  | <b>IC13N</b>                    |
| <b>IC11</b> | <b>Microprocessors, microcomputers and peripheral circuitry</b>   | <b>IC14N</b>                    |

## NEW SERIES

|                            |  |                  |
|----------------------------|--|------------------|
| <b>IC01N</b>               | <b>Radio, audio and associated systems</b><br>Bipolar, MOS                         | (published 1985) |
| <b>IC02Na</b>              | <b>Video and associated systems</b><br>Bipolar, MOS<br>Types MAB8031AH to TDA1524A | (published 1985) |
| <b>IC02Nb</b>              | <b>Video and associated systems</b><br>Bipolar, MOS<br>Types TDA2501 to TEA1002    | (published 1985) |
| <b>IC03N</b>               | <b>Integrated circuits for telephony</b>   | (published 1985) |
| <b>IC04N</b>               | <b>HE4000B logic family</b><br>CMOS  |                  |
| <b>IC05N</b>               | <b>HE4000B logic family – uncased ICs</b><br>CMOS                                  | (published 1984) |
| <b>IC06N</b>               | <b>High-speed CMOS; PC54/74HC/HCT/HCU</b><br>Logic family                          | (published 1985) |
| <b>Supplement to IC06N</b> | <b>High-speed CMOS; PC74HC/HCT/HCU</b><br>Logic family                             | (published 1985) |
| <b>IC07N</b>               | <b>High-speed CMOS; PC54/74HC/HCT/HCU – uncased ICs</b><br>Logic family            |                  |
| <b>IC08N</b>               | <b>ECL 10K and 100K logic families</b>   | (published 1984) |
| <b>IC09N</b>               | <b>TTL logic series</b>  | (published 1984) |
| <b>IC10N</b>               | <b>Memories</b><br>MOS, TTL, ECL   |                  |
| <b>IC11N</b>               | <b>Linear LSI</b>  | (published 1985) |
| <b>IC12N</b>               | <b>Semi-custom gate arrays &amp; cell libraries</b><br>ISL, ECL, CMOS              |                  |
| <b>IC13N</b>               | <b>Semi-custom</b><br>Integrated Fuse Logic  | (published 1985) |
| <b>IC14N</b>               | <b>Microprocessors, microcontrollers &amp; peripherals</b><br>Bipolar, MOS         | (published 1985) |
| <b>IC15N</b>               | <b>FAST TTL logic series</b>   | (published 1984) |

### Note

Books available in the new series are shown with their date of publication.

## COMPONENTS AND MATERIALS (GREEN SERIES)

The green series of data handbooks comprises:

- C1 Programmable controller modules**  
PLC modules, PC20 modules
- C2 Television tuners, coaxial aerial input assemblies, surface acoustic wave filters**
- C3 Loudspeakers**
- C4 Ferroxcube potcores, square cores and cross cores**
- C5 Ferroxcube for power, audio/video and accelerators**
- C6 Synchronous motors and gearboxes**
- C7 Variable capacitors**
- C8 Variable mains transformers**
- C9 Piezoelectric quartz devices**
- C10 Connectors**
- C11 Non-linear resistors**  
Voltage dependent resistors (VDR), light dependent resistors (LDR), negative temperature coefficient thermistors (NTC), positive temperature coefficient thermistors (PTC)
- C12 Potentiometers, encoders and switches**
- C13 Fixed resistors**
- C14 Electrolytic and solid capacitors**
- C15 Ceramic capacitors**
- C16 Permanent magnet materials**
- C17 Stepping motors and associated electronics**
- C18 Direct current motors**
- C19 Piezoelectric ceramics**
- C20 Wire-wound components for TVs and monitors**
- C21\* Assemblies for industrial use**  
HNIL FZ/30 series, NORbits 60-, 61-, 90-series, input devices
- C22 Film capacitors**



















\* Will be issued in 1985.









## SELECTION GUIDE

## SELECTION GUIDE





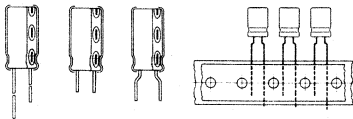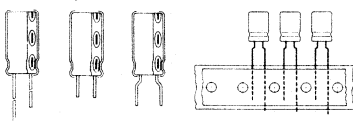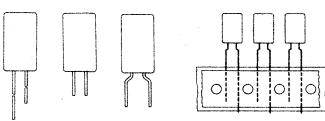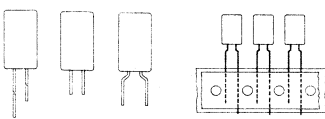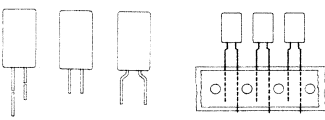







### ALUMINIUM ELECTROLYTIC CAPACITORS

| type            |   | series<br>number<br>2222 . . .  | application   | nominal<br>capacitance<br>$\mu\text{F}$       | rated<br>voltage ( $U_R$ )<br>V   | page           |            |     |
|-----------------|---|---|---|---|---|----------------|------------|-----|
| Miniature/small |    |    |  | 014   | long-life,<br>general,<br>industrial;<br>low impedance<br>for<br>s.m.p.s. | 1 to 10 000    | 6,3 to 100 | 41  |
| Miniature/small |    |    |  | 021   | long-life,<br>general,<br>industrial;<br>small<br>dimensions              | 0,22 to 15 000 | 10 to 100  | 79  |
| Miniature/small |    |    |  | 030<br>031<br>032<br>033<br>041<br>042<br>043 | long-life,<br>general,<br>industrial                                      | 0,33 to 15 000 | 6,3 to 100 | 109 |
| Miniature       |    |   |   | 065   | long-life,<br>general,<br>industrial;<br>low leakage<br>current           | 0,33 to 68     | 6,3 to 25  | 257 |
| Ultra miniature |  |  |   | 117   | general   | 0,1 to 0,22    | 6,3 to 63  | 339 |
| Small           |  |  |   | 108   | extra<br>long-life,<br>industrial   | 2,2 to 2 200   | 6,3 to 100 | 285 |
| Miniature/small |  |  |   | 118   | extra<br>long-life<br>industrial,<br>military                             | 1 to 15 000    | 6,3 to 200 | 353 |
| Miniature/small |  |  |   | 132<br>133                                    | extra<br>long-life,<br>industrial<br>DIN 41257                            | 1 to 4 700     | 10 to 350  | 365 |

| type   | series number<br>2222 . . . | application   | nominal capacitance<br>$\mu\text{F}$ | rated voltage ( $U_R$ )<br>V | page |
|--|-----------------------------|---|--------------------------------------|------------------------------|------|
| <p><b>Miniature/small</b></p>                | 035                         | general   | 0,1 to 4 700                         | 6,3 to 100                   | 153  |
| <p><b>Miniature/small</b></p>                | 037                         | general   | 0,1 to 10 000                        | 6,3 to 100                   | 187  |
| <p><b>Miniature</b></p>                      | 036                         | long-life,<br>general,<br>industrial                            | 0,15 to 470                          | 6,3 to 63                    | 171  |
| <p><b>Miniature</b></p>                      | 013                         | long-life,<br>general,<br>industrial;<br>low leakage<br>current | 0,15 to 220                          | 10 to 25                     | 25   |
| <p><b>Miniature</b></p>                     | 116                         | extra<br>long-life,<br>industrial                               | 0,47 to 470                          | 6,3 to 50                    | 323  |
| <p><b>Miniature; surface mounted</b></p>  | 085                         | general   | 0,1 to 22                            | 6,3 to 63                    | 271  |

# ELECTROLYTIC AND SOLID CAPACITORS

## ALUMINIUM ELECTROLYTIC CAPACITORS (continued)

| type                              |   | series<br>number<br>2222 . . . | application                                      | nominal<br>capacitance<br>$\mu\text{F}$ | rated<br>voltage ( $U_R$ )<br>V | page |
|-----------------------------------|---|--------------------------------|--|---|---------------------------------|------|
| Large                             |    | 114<br>115                     | long-life<br>industrial                          | 150 to 220 000                          | 10 to 385                       | 299  |
| Large                             |    | 050<br>052                     | long-life,<br>industrial                         | 47 to 68 000                            | 10 to 385                       | 223  |
| Large                             |    | 051<br>053                     | long-life,<br>industrial;<br>small<br>dimensions | 68 to 150 000                           | 10 to 385                       | 247  |
| <b>SOLID ALUMINIUM CAPACITORS</b> |   |                                |  |   |                                 |      |
| Miniature; resin dipped           |     | 122                            | very<br>long-life,<br>general,<br>industrial     | 0,1 to 68                               | 6,3 to 40                       | 407  |
| Miniature; epoxy potted           |   | 124                            | extra<br>long-life,<br>general,<br>industrial    | 0,1 to 68                               | 6,3 to 40                       | 491  |
| Small                             |     | 121                            | very<br>long-life,<br>military,<br>industrial    | 2,2 to 330                              | 6,3 to 50                       | 385  |
| Small                             |    | 123                            | very<br>long-life,<br>military,<br>industrial    | 2,2 to 2 200                            | 4 to 40                         | 435  |
| Miniature                         |    | 125                            | long-life<br>military,<br>industrial             | 0,22 to 68                              | 4 to 35                         | 511  |

## INTRODUCTION



## INTRODUCTION

### 1. GENERAL

Electrolytic and solid capacitors are most commonly used in such circuit functions as filtering, coupling, smoothing and by-passing, and for energy storage, or wherever there is a need for capacitive reactance.

These functions are often applied under specific circumstances and the requirements specified by users have grown steadily. The outcome has been a wide range of electrolytic and solid capacitor programmes to cover the different applications, for example:

|                                |   |
|--------------------------------|---|
| <b>General purpose</b>         | radio, television, and general/industrial applications.   |
| <b>Professional/industrial</b> | long life and high reliability – telecommunications equipment, electronic data processing.<br>high temperature – motor cars.<br>small size – hybrid circuits, paging systems.<br>low equivalent series resistance at high frequency – switched-mode power supplies. |

### 2. PRINCIPLES

The essential property of a capacitor is to store electrical charge. The amount of electrical charge (Q) in the capacitor (C) is proportional to the applied voltage (U). The relationship of these parameters is:

$$Q = C \cdot U$$

where Q = charge in coulombs (C)  
C = capacitance in farads (F)  
U = voltage in volts (V)

The value of capacitance is directly proportional to the (anode) surface area and inversely proportional to the thickness of the dielectric layer, thus:

$$C = \epsilon_r \cdot \epsilon_0 \cdot \frac{A}{d}$$

where  $\epsilon_0$  = absolute permittivity ( $8,85 \times 10^{-12}$  F/m)  
 $\epsilon_r$  = relative dielectric constant (dimensionless)  
A = surface area ( $m^2$ )  
d = thickness of dielectric (oxide) layer (m)

The dielectric layer consists of aluminium oxide ( $Al_2O_3$ ) which is formed by an electrochemical oxidizing process of aluminium. This layer withstands extremely high electrical field strength. During the electrochemical forming process the dielectric layer is exposed to the physical limit of electrical field strength mentioned above. So the thickness of the layer is determined by a voltage  $U_F$ , the so-called forming voltage. To avoid changing the thickness of the layer during normal use the operating voltage should always be lower than the forming voltage. For general purpose electrolytic capacitors the value of  $U_R/U_F$  is about 0,8 ( $U_R$  being the rated voltage). Types for professional and industrial applications are sometimes rated to 0,6. Solid capacitors are rated to approx. 0,25 due to various reasons.

The relative dielectric constant of  $Al_2O_3$  is approx. 8 (dimensionless), its electrical field strength amounts to  $7 \cdot 10^8$  V/m.

## 3. DESCRIPTION

The above-mentioned dielectric layer is electrically contacted on one side by its base metal (aluminium) and on the other side by a conductor, being an electrolyte in the case of an electrolytic capacitor and a solid semiconductor in the case of a solid capacitor. The metal contact electrode is called the anode. To obtain high capacitance values per unit volume the surface of the anode is artificially enlarged by etching processes.

### Aluminium electrolytic capacitors

The containing electrode opposite to the anode is an ionic conductor in the case of an electrolytic capacitor. Because of this ionic conduction the potential of the anode should never be lower than the potential of the electrolyte: if the potential of the anode is lower than that of the electrolyte, positive hydrogen ions will move through the dielectric layer to the anode metal where they are discharged.

The hydrogen gas so formed blows up the dielectric layer, causing a high leakage current or even a short circuit. In the case of the anode being at a positive potential with respect to the electrolyte (this is the case of normal use) the oxidizing ions are driven towards the dielectric layer.

These oxidizing ions are not able to pass through the dielectric layer at field strengths lower than the physical limit ( $7 \cdot 10^8$  V/m). In the case of a defect in the dielectric layer the limiting field strength might be reached even during normal use. In that case the oxidizing ions will pass through the defect to the anode metal where new oxide is formed, which repairs the defect.

It is necessary to make electrical contact to the electrolyte from outside. This is usually done by inserting an etched aluminium electrode into the electrolyte. This electrode, called the cathode, is always covered by a relatively thin oxide layer. To avoid direct mechanical contact between the oxide layers of cathode and anode (which would cause mechanical damage of the dielectric) a soft spacer of porous paper is used which also serves as a sponge for the electrolyte.

The total thickness of the system described is only a fraction of a millimetre. Therefore, during manufacture, long strips of the described system are wound into cylindrical bodies and encased. Figure 1 shows a cross-section of a typical design.

### Solid aluminium capacitors

In a solid capacitor the contacting electrode opposite to the anode is formed by manganese dioxide ( $MnO_2$ ), a semiconductor, and called the cathode. Therefore, in principle, the potential of the anode with respect to the cathode is allowed to be positive as well as negative. However, due to the absence of oxidizing ions, no self-repairing effect of the dielectric layer by the leakage current is obtained. In practice it is advisable to maintain the anode potential positive with respect to the cathode, because no solid capacitor is absolutely free of moisture, so ionic reactions could take place.

Via the system manganese dioxide — aluminium foil — case — tinned leads, the cathode is electrically connected with the outside in our 121 and 123 series of solid aluminium capacitors (Fig. 1). A glass fibre spacer is used to avoid direct mechanical contact between anode layer and the aluminium contact foil.

In the 122 series of solid aluminium capacitors the cathode is connected to the outside via the system manganese dioxide — graphite — silver — tin solder — tinned leads (Fig. 2).

## NOTE:

Standard MIL-C-62 for dry electrolytics is based on a now obsolete construction and does not apply to solid aluminium capacitors.



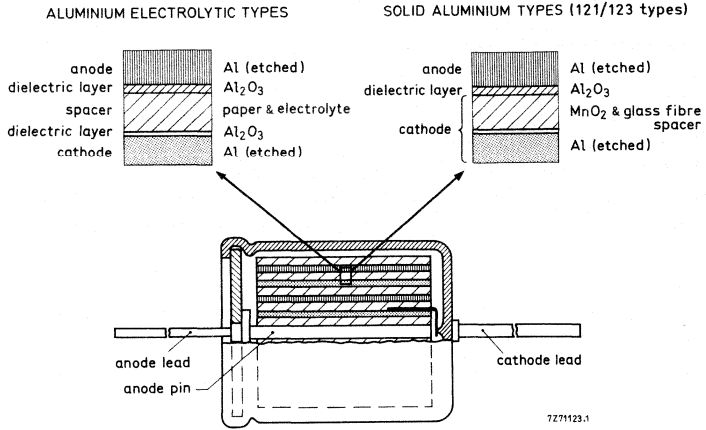


Fig. 1.

811216-13-01

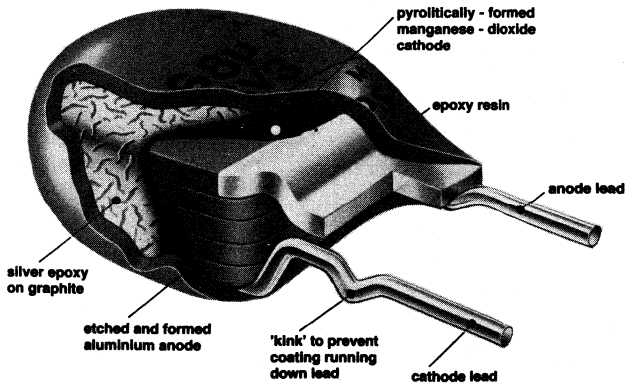


Fig. 2 Solid aluminium type 2222 122.

## 4. ELECTRICAL IMPEDANCE

The electrical impedance  $Z$  of a capacitor in its reference plane (being the connecting points on a printed-wiring board) consists of a real part  $R$ , and an imaginary part  $j \cdot X$ , thus:

$$Z = R + j \cdot X \quad \text{and} \quad \tan \delta = \frac{R}{X}$$

where  $R$  = the equivalent series resistance (ESR) ( $\Omega$ )  
 $j \cdot X$  = the imaginary part of the series impedance ( $\Omega$ )  
 $Z$  = the complex series impedance ( $\Omega$ )  
 $\tan \delta$  = dissipation factor (dimensionless)

The actual values of  $R$  and  $X$  depend upon two parameters: the frequency  $f$  and the temperature  $T$ . It is usual to express  $X$  in terms of  $C_s$  (equivalent series capacitance) and  $\omega$ :

$$X = -\frac{1}{\omega C_s} \quad \omega = 2 \cdot \pi \cdot f, \quad f \text{ in (Hz)}$$

At high frequencies ( $> 100$  kHz) an inductive part contributes to the impedance, changing  $X$  into  $X = j\omega L$ , where  $L$  = inductance in H.

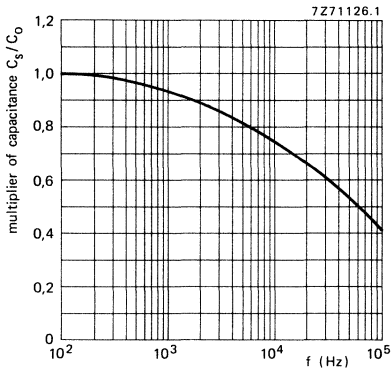


Fig. 3 Typical capacitance as a function of frequency.  $C_0$  = capacitance at 25 °C, 100 Hz.

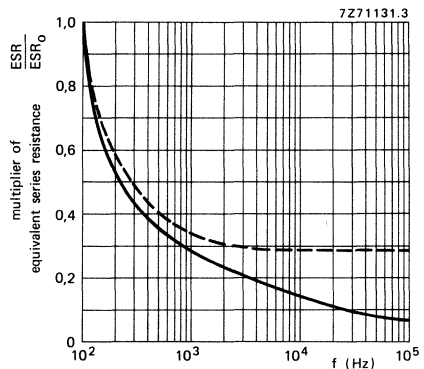


Fig. 4 Typical ESR as a function of frequency;  $ESR_0$  = ESR at 25 °C, 100 Hz.

--- Aluminum electrolytic capacitors;  
 — Solid aluminium capacitors.

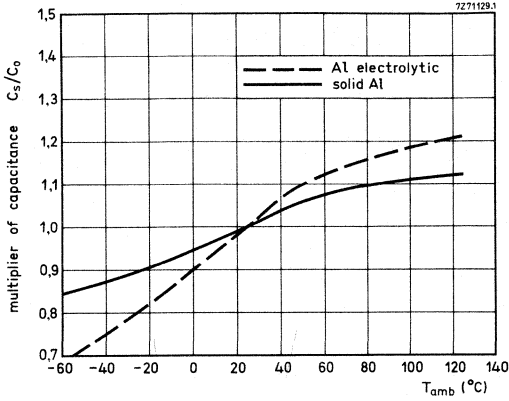


Fig. 5 Typical capacitance as a function of ambient temperature;  $C_0$  = capacitance at 25 °C, 100 Hz.

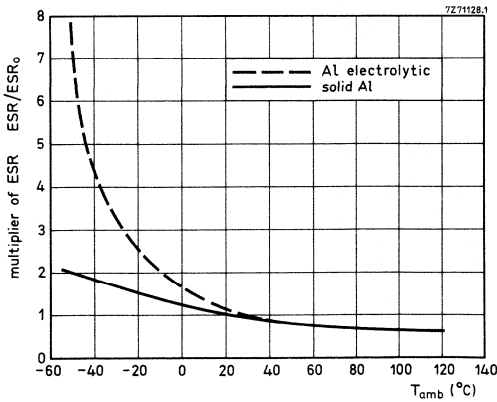


Fig. 6 Typical ESR as a function of ambient temperature.  $ESR_0$  = ESR at 100 Hz, at 25 °C.

## 5. RIPPLE CURRENT

In various applications a considerable amount of ripple current ( $I_r$ ) passes through the capacitor. Due to the equivalent series resistance ( $R$ ) power ( $P$ ) is dissipated in the device:  $P$  (watt) =  $I_r^2 \cdot R$ .

The power causes an increase in temperature of the capacitor core. In the data sheets the maximum permissible ripple current ( $I_{r\max}$ ) is generally specified in such a way that it causes an equilibrium temperature difference ( $\Delta T$ ) between core and upper category temperature of 10 °C. A ripple current  $I_a$  different from  $I_{r\max}$  causes a temperature difference  $\Delta T = \left(\frac{I_a}{I_{r\max}}\right)^2 \times 10$  °C, so the actual core

temperature  $T_{\text{core}} = T_{\text{amb}} + \left(\frac{I_a}{I_{r\max}}\right)^2 \times 10$  °C. Temperature equilibrium is reached when the power ( $P$ ) passes through the case surface into the ambient. From this it is clear, that the maximum permissible ripple current depends on the maximum permissible temperature of the capacitor, equivalent series resistance, case size and ambient temperature ( $T_{\text{amb}}$ ).

In the data sheets the maximum permissible ripple current is specified under certain conditions,

$$I_r = \sqrt{\frac{P}{R}} = \sqrt{\frac{\alpha \cdot S (T_c - T_{\text{amb}})}{R}}$$

where  $I_r$  = ripple current (A);  $R$  = equivalent series resistance ( $\Omega$ );  $P$  = heat dissipation (W);  $\alpha$  = heat transfer coefficient (W/m<sup>2</sup> °C);  $S$  = heat transfer surface area (m<sup>2</sup>);  $T_c$  = temperature of case surface (°C);  $T_{\text{amb}}$  = ambient temperature (°C).

## 6. D.C. LEAKAGE CURRENT

In normal use a small amount of direct current passes through the capacitor. This current is called the d.c. leakage current ( $I_l$ ) and depends on the applied voltage and temperature. The dependency of  $I_l/I_0$  ( $I_0$  being the d.c. leakage current at voltage  $U_R$  and 25 °C) on temperature, is shown in Fig. 7 for an aluminium electrolytic capacitor and a solid aluminium capacitor.

The dependency of  $I_l/I_0$  as a function of  $U/U_R$  is given in Fig. 8 for an aluminium electrolytic capacitor and a solid aluminium capacitor,  $U$  being the working voltage.

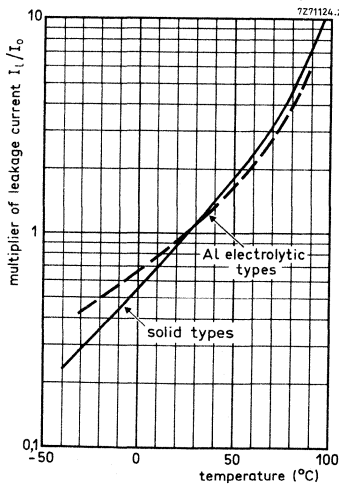


Fig. 7 Typical d.c. leakage current as a function of temperature.  $I_0$  = d.c. leakage current during continuous operation at  $T_{\text{amb}} = 25$  °C.

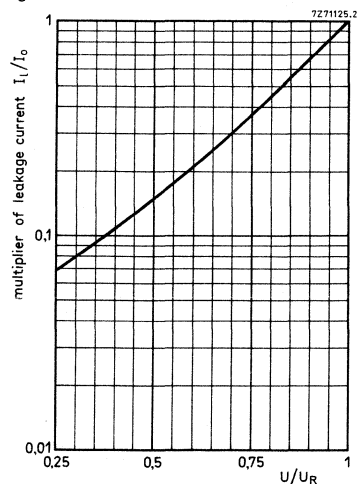


Fig. 8 Typical d.c. leakage current as a function of  $U/U_R$ .  $I_0$  = d.c. leakage current at  $U_R$  at a discrete constant temperature within category temperature range,  $U$  is working voltage.

## 7. LIFE TIME

### Aluminium electrolytic capacitors

The phenomena which determine the life time of an aluminium electrolytic capacitor are, among others, changes of the following parameters exceeding the specified limits:

- capacitance
- dissipation factor
- impedance
- d.c. leakage current

Most of them are directly or indirectly caused by a failure mechanism occurring in the electrolyte (drying out, chemical reactions).

Two types of electrolyte can be distinguished:

- a. Glycol-electrolyte which is somewhat aggressive to the dielectric layer at higher temperatures. This liquid has a relatively high specific resistance and high temperature coefficient.
- b. modern electrolytes (based upon DiMethyl Acetamide) require very good sealing (due to high diffusiveness of the volatile solvent). This liquid has a relatively low specific resistance and a low temperature coefficient, and can generally be used over a wider temperature range than the glycol type of electrolyte.

In general the life time of an aluminium electrolytic capacitor can be increased by a factor of 2 when the temperature is dropped by 10 °C.

By using the capacitor at a voltage lower than the rated voltage, the d.c. leakage current decreases, which means that the process of forming hydrogen gas at the cathode takes place at a lower rate. This also improves the life time of the capacitor.

The typical life time at  $U_R$ , as given in the data sheets, is the time during which the number of inoperatives is  $\leq 1\%$ .

Criteria for an inoperative are:  $\Delta C/C \geq 50\%$ ;  
impedance  $\geq 3 \times$  stated limit;  
 $\tan \delta$  (and ESR)  $\geq 3 \times$  stated limit;  
d.c. leakage current  $\geq 3 \times$  stated limit.

### Solid aluminium capacitors

The end of life is determined by gradual degradation of the dielectric oxide layer, resulting in increase of leakage current. The life time can be increased by derating the voltage and, to a less extent, the temperature.

Due to the fact that no electrolyte is used in solid aluminium capacitors the associated failure mechanisms do not occur.

## NOTE

Some solvents for cleaning printed-circuit boards after soldering may adversely affect electrolytic capacitors. Please contact local sales office for suitable cleaning agents.

## 8. RELIABILITY

In life testing, reliability can be determined by means of a failure rate (F.R.), which is expressed as:

$$\text{Failure rate (F.R.)} = \frac{\text{number of failures during test}}{\text{number of components tested} \times \text{test duration}}$$

Two types of failures can be found:

- catastrophic failures: short circuits, open circuits.
- degradation failures: parameter drifts outside the specification limits.

With aluminium electrolytic capacitors degradation failures mostly occur, due to factors like:

- aggressiveness of the electrolyte.
- diffusion of the electrolyte.
- material impurities and other accidents of production.

The failure rate of solid aluminium and tantalum capacitors is determined by short circuits or open circuits, due to breakdown of the dielectric layer. The electron current does not constitute a repair action in this oxide layer.

The failure rate in solid tantalum capacitors is mostly influenced by a field-crystallization process. The F.R. can be improved by lowering the temperature and applied voltage or placing a series resistor in the circuitry.

The phenomenon of the formation of a low resistance aluminium oxide does not exist in solid aluminium capacitors, therefore they have greater reliability than solid tantalum types. Under the most severe conditions (maximum category temperature, rated voltage), the catastrophic failure rates (with a 60% confidence level) are:

- electrolytic capacitors  $10^{-6}/\text{h}$ ,
- solid aluminium capacitors  $10^{-7}/\text{h}$ .

Analysis of failure in the field (under normal operating conditions) shows a far better F.R.:  $\approx 10^{-9}/\text{h}$  for solid aluminium capacitors.

## 9. TESTS AND REQUIREMENTS

The description of tests and requirements, given in the following tables, is valid for the complete range of aluminium electrolytic capacitors and solid aluminium capacitors. Specific tests for a certain type of capacitor are not included in these tables; those tests are given in the data sheet of the relevant type.

## Aluminium electrolytic capacitors

In the description of the procedure and the requirements of the tests, in some case distinction has to be made for the different types of aluminium electrolytic capacitors with respect to their size or with respect to their application fields. In the table this distinction is indicated in the columns 'type' with the indication for size:

m for miniature types,

s for small types,

l for large types,

It for large types with screw terminals,

or with the indication for application fields:

1 for long-life grade types,

2 for general-purpose grade types.

If no indication is given in these columns, reference is made to all types.

| IEC384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test                     | procedure (quick reference) |  | requirements |   |
|------------------------|----------------------------|----------------------------------|-----------------------------|--|--------------|---|
|                        |                            |                                  | type                        | description  | type         | description   |
| —                      | Ua                         | Tensile strength of terminations | ms<br>l                     | Loading force 10 N for 10 s.<br>Loading force 20 N for 10 s.   | ms<br>l      | No visible damage.  |
| —                      | Ub                         | Bending of terminations          | ms                          | Loading force 5 N, two consecutive bends.  | ms           | No visible damage   |
| —                      | Uc                         | Torsion of terminations          | ms                          | Two successive rotations of 180° in opposite direction, 5 s per rotation.  | ms           | No visible damage.  |
| —                      | Ud                         | Torque on nut (stud)             | It                          | Torque of 1,76 Nm gradually applied.   | It           | No visible damage.  |
| 9.8.2                  | Tb<br>(method 1A)          | Resistance to soldering heat     | ms<br>l                     | Solder bath: 260 °C, 10 s, for capacitors with printed-wiring pins.  | ms<br>l      | No visible damage, marking legible, $\Delta C/C \leq 5\%$ . |
|                        | Tb<br>(method 1B)          |                                  |                             | Solder bath 350 °C, 3,5 s for capacitors with solder leads or tags.  |              |   |
| 9.8.1                  | Ta                         | Solderability                    | ms<br>l                     | Solder bath: 235 °C, 2 s for capacitors with printed-wiring pins, 270 °C, 2 s for capacitors with solder leads or tags, immersed up to 2 mm from the body. | ms<br>l      | No visible damage, marking legible, good tinning.           |

# ELECTROLYTIC AND SOLID CAPACITORS

| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test                | procedure (quick reference) |  | requirements |   |
|-------------------------|----------------------------|-----------------------------|-----------------------------|--|--------------|---|
|                         |                            |                             | type                        | description  | type         | description   |
| 9.9                     | Na                         | Rapid change of temperature |                             | 5 cycles of 3 h at upper and lower category temperature.                           |              | No visible damage, no leakage of electrolyte.   |
| 9.10                    | Fc                         | Vibration                   | 1                           | 10 to 500 Hz, 0,75 mm or 10g (whichever is less), 2 directions, 3 h per direction. |              | No visible damage, no leakage of electrolyte, marking legible;  |
|                         |                            |                             | 2                           | 10 to 55 Hz, 0,75 mm or 10g (whichever is less), 2 directions, 3 h per direction.  |              | $\Delta C/C \leq 5\%$ with respect to initial measurement.  |
| 9.11                    | Eb                         | Bump                        | 1                           | 40g, 2 directions, 4000 bumps total.   |              | No visible damage, no leakage of electrolyte; $\Delta C/C \leq 5\%$ with respect to initial measurement.  |
|                         |                            |                             | 2                           | 40g, 2 directions, 1000 bumps total.   |              | No visible damage, no leakage of electrolyte.   |
|                         |                            | Dry heat                    |                             | 16 h at upper category temperature, no voltage applied.                            |              | No visible damage, no leakage of electrolyte.   |
|                         |                            | Damp heat, cyclic           |                             | 1 cycle of 24 h at $55 \pm 2$ °C, R.H. 95 to 100%, no voltage applied.             |              |   |
|                         |                            | Cold                        |                             | 2 h at lower category temperature, no voltage applied.                             |              | No visible damage, no leakage of electrolyte.   |
| 9.12.1                  | M                          | Low air pressure            |                             | 5 min. at 15 to 35 °C, at atmospheric pressure of 85 mbar, last minute UR applied. |              | No visible damage, no evidence of breakdown or flashover.   |
|                         |                            |                             |                             | 5 cycles of 24 h at $55 \pm 2$ °C, R.H. 95 to 100%, no voltage applied.            |              |   |
| 9.12.2                  | Oc                         | Sealing                     |                             | 1 min. in water at upper category temperature + 5 °C.                              |              | No continuous chain of bubbles.   |
|                         |                            |                             |                             | Final measurement  |              | No visible damage, no leakage of electrolyte, marking legible; d.c. leakage current $\leq$ stated limit; $\tan \delta \leq 1,2 \times$ stated limit; $\Delta C/C \leq 10\%$ . |



| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test               | procedure (quick reference) |  | requirements  |  |
|-------------------------|----------------------------|----------------------------|-----------------------------|--|---|--|
|                         |                            |                            | type                        | description  | type  | description  |
| 9.13                    | Ca                         | Damp heat,<br>steady state |                             | 56 days at 40 °C, R. H. 90 to 95%;<br>no voltage applied.  |   | No visible damage, no leakage of<br>electrolyte, marking legible; d.c. leakage<br>current $\leq$ stated limit, $\tan \delta \leq 1,2 \times$<br>stated limit, insulation resistance<br>$> 100 \text{ M}\Omega$ , no breakdown or flashover<br>below 1000 V.  |
| 9.14                    | -                          | Endurance                  | 1                           | 2000 h** at upper category temperature,<br>$U_R$ applied.  | 1   | No visible damage, no leakage of<br>electrolyte, marking legible; d.c. leakage<br>current $\leq$ stated limit, insulation<br>resistance $> 100 \text{ M}\Omega$ , no breakdown<br>or flashover below 1000 V.   |
|                         |                            |                            |                             |  | 2   | No visible damage, no leakage of<br>electrolyte, marking legible; d.c. leakage<br>current $\leq$ stated limit, impedance<br>at 1 kHz or 10 kHz $\leq 2 \times$ stated limit.*  |
|                         |                            |                            |                             |  | 1   | $\Delta C/C \leq 15\%$ and $\leq -30\%$ for $U_R \leq 6,3 \text{ V}$ ,<br>$\Delta C/C \leq 15\%$ for $6,3 \text{ V} < U_R \leq 160 \text{ V}$ ,<br>$\Delta C/C \leq 10\%$ for $U_R > 160 \text{ V}$ ;<br>$\tan \delta \leq 1,3 \times$ stated limit, impedance<br>at 1 kHz or 10 kHz $\leq 2 \times$ stated limit.*  |
|                         |                            |                            |                             |  | 2   | $\Delta C/C \leq 25\%$ and $\leq -40\%$ for $U_R \leq 6,3 \text{ V}$ ,<br>$\Delta C/C \leq 30\%$ for $6,3 \text{ V} < U_R \leq 160 \text{ V}$ ,<br>$\Delta C/C \leq 15\%$ for $U_R > 160 \text{ V}$ ;<br>$\tan \delta \leq 1,5 \times$ stated limit or min. 0,40<br>(whichever is greater), impedance at<br>1 kHz or 10 kHz $\leq 3 \times$ stated limit.* |
| 9.15                    | -                          | Surge                      | 1                           | From source of $1,15 \times U_R$ for $U_R \leq 315 \text{ V}$<br>or $1,1 \times U_R > 315 \text{ V}$ , $RC = 0,1 \pm 0,05 \text{ s}$ ,<br>1000 cycles of 30 s on, 330 s off. | No visible damage, no leakage of<br>electrolyte; d.c. leakage current $\leq$ stated<br>limit, $\tan \delta \leq$ stated limit, $\Delta C/C \leq 15\%$ . |  |
|                         |                            |                            | 2                           | At upper category temperature.   |   |  |
|                         |                            |                            |                             | At 25 °C.  |   |  |

\* If stated in the detail specification.

\*\* Capacitors 2222 032, 033, 039, 042, 043, 114, 115 are specified at 5000 h; requirements are as stated under type 1.

# ELECTROLYTIC AND SOLID CAPACITORS

| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test                                | procedure (quick reference) |  | requirements |  |
|-------------------------|----------------------------|---|-----------------------------|--|--------------|--|
|                         |                            |   | type                        | description  | type         | description  |
| 9.16                    | -                          | Reverse voltage                             |                             | 1 V in reverse polarity followed by UR in forward polarity, both for 125 h at upper category temperature.  |              | D.C. leakage current $\leq$ stated limit, $\tan \delta \leq$ stated limit, $\Delta C/C \leq 10\%$ .  |
| 9.17                    | -                          | Pressure relief                             | I<br>It                     | D.C. voltage applied in reverse direction producing a current of 1 to 10 A.  | I<br>It      | Pressure relief opens prior to danger of explosion or fire.  |
| 9.18                    | Ha                         | Storage at upper category temperature       |                             | 96 $\pm$ 4 h at upper category temperature.  |              | No visible damage, no leakage of electrolyte; d.c. leakage current $\leq 2 \times$ stated limit, $\tan \delta \leq 1,2 \times$ stated limit; $\Delta C/C \leq 10\%$ .  |
| 9.19                    | Hb                         | Storage at low temperature                  |                             | 72 h at a temperature of 15 °C below the lower category temperature.   |              | No visible damage, no leakage of electrolyte; d.c. leakage current $\leq$ stated limit, $\tan \delta \leq$ stated limit; $\Delta C/C \leq 10\%$ .  |
| 9.20                    |                            | Characteristics at high and low temperature |                             | <b>Step 1:</b> reference measurement at 20 °C of capacitance, impedance at 100 Hz and $\tan \delta$ .<br><b>Step 2:</b> measurement at lower category temperature.   |              | Impedance at 100 Hz $\leq 7 \times$ value of step 1 for $U_R \leq 6,3$ V or $U_R > 160$ V, $\leq 5 \times$ value of step 1 for $6,3 < U_R \leq 16$ V, $\leq 4 \times$ value of step 1 for $16 < U_R \leq 160$ V. |
| 9.21                    |                            | Charge and discharge                        |                             | <b>Step 3:</b> Measurement at upper category temperature.<br>For $U_R \leq 160$ V: $10^6$ cycles of 0,5 s charge to $U_R$ ( $RC = 0,1$ s) and 0,5 s discharge ( $RC = 0,1$ s). For $U_R > 160$ V: under consideration. |              | D.C. leakage current $\leq 5 \times$ stated limit at 85 °C, $\leq 3 \times$ stated limit at 70 °C.<br>No visible damage, no leakage of electrolyte, $\Delta C/C \leq 10\%$ .                                     |

## Solid aluminium capacitors

In the description of the procedure and the requirements of the tests, in some cases distinction has to be made for the types 2222 121, 2222 122 and 2222 123. In the table this distinction is indicated by 121/123 or 122 in the columns 'type'. If no indication is given in these columns reference is made to all types.

| IEC 384—4<br>sub clause | IEC 68—2<br>test<br>method | name of test                     | procedure (quick reference)                                   |  | requirements |   |
|-------------------------|----------------------------|----------------------------------|---|--|--------------|---|
|                         |                            |                                  | type  | description  | type         | description   |
| —                       | Ua                         | Tensile strength of terminations |   | Loading force 10 N for 10 s.   |              | No visible damage; no rupture of wires  |
| —                       | Ub                         | Bending of terminations          |   | Loading force 5 N, two consecutive bends.  |              | No visible damage; no rupture of wires  |
| —                       | Uc                         | Torsion of terminations          | 121/<br>123   | Two successive rotations of 180° in opposite direction, 5 s per rotation.                            | 121/<br>123  | No visible damage.  |
| 9.8.2                   | Tb<br>(method 1A)          | Resistance to soldering heat     | 122   | Solder bath: 260 °C, 10 s, for capacitors with printed-wiring pins.                                  |              | No visible damage, marking legible, $\Delta C/C \leq 5\%$ .   |
|                         | Tb<br>(method 1B)          |                                  | Solder bath: 350 °C, 3,5 s, for capacitors with solder leads. |  |              |   |
| 9.8.1                   | Ta                         | Solderability                    | 122   | Solder bath: 235 °C, 2 s for capacitors with printed-wiring pins, immersed up to 2 mm from the body. |              | No visible damage, marking legible, good tinning.   |
|                         |                            |                                  | 121/<br>123   | Solder bath: 270 °C, 2 s for capacitors with solder leads, immersed up to 2 mm from the body.        |              |   |
| 9.9                     | Na                         | Rapid change of temperature      |   | 5 cycles of 30 min at upper and lower category temperature.  |              | D.C. leakage current $\leq$ stated limit,*<br>$\tan \delta \leq$ stated limit, $\Delta C/C \leq 10\%$ |
| 9.10                    | Fc                         | Vibration                        |   | 10 to 500 Hz, 0,75 mm or 10g (whichever is less), 2 directions, 3 h per direction.                   |              | No visible damage, marking legible;<br>$\Delta C/C \leq 5\%$ with respect to initial measurement.     |

\* For capacitors 2222 122, 15 s value of d.c. leakage current measured after 5 min.

# ELECTROLYTIC AND SOLID CAPACITORS

| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test            | procedure (quick reference) |  | requirements  |   |
|-------------------------|----------------------------|-------------------------|-----------------------------|--|---|---|
|                         |                            |                         | type                        | description  | type  | description   |
| 9.11                    | Eb                         | Bump                    |                             | 40g, 2 directions, 4000 bumps total.   |   | No visible damage; $\Delta C/C \leq 5\%$ with respect to initial measurement.   |
|                         |                            | Dry heat                |                             | 16 h upper category temperature, no voltage applied.                               |   | No visible damage.  |
|                         |                            | Damp heat, cyclic       |                             | 1 cycle of 24 h at $55 \pm 2$ °C, R.H. 95 to 100%, no voltage applied.             |   |   |
|                         |                            | Cold                    |                             | 2 h at lower category temperature, no voltage applied.                             |   | No visible damage.  |
|                         |                            | Low air pressure        |                             | 5 min. at 15 to 35 °C, at atmospheric pressure of 85 mbar, last minute UR applied. |   | No visible damage.  |
| 9.12.1                  | D                          | Damp heat, cyclic       |                             | 5 cycles of 24 h at $55 \pm 2$ °C, R.H. 95 to 100%, no voltage applied.            |   | No visible damage.  |
|                         |                            |                         |                             | Final measurement.   |   | No visible damage, marking legible;<br>d.c. leakage current $\leq$ stated limit,*<br>$\tan \delta \leq 1,2$ x stated limit, insulation resistance $> 100 M\Omega$ , no breakdown or flashover below 1000 V. |
| 9.13                    | Ca                         | Damp heat, steady state |                             | 56 days at 40 °C, R.H. 90 to 95%, no voltage applied.                              | 121/<br>123   | $\Delta C/C \leq 5\%$ .   |
|                         |                            |                         | 122                         |  | $\Delta C/C \leq 10\%$ .  |   |
|                         |                            |                         |                             |  | No visible damage, marking legible;<br>d.c. leakage current $\leq$ stated limit,*<br>$\tan \delta \leq 1,2$ x stated limit, insulation resistance $> 100 M\Omega$ , no breakdown or flashover below 1000 V. |   |
|                         |                            |                         |                             |  | 121/<br>123   | $\Delta C/C \leq 5\%$ .   |
|                         |                            |                         |                             |  | 122   | $\Delta C/C \leq 15\%$ .  |

\* For capacitors 2222 122 15 s value of d.c. leakage current measured after 5 min

| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test                                  | procedure (quick reference) |  | requirements |   |
|-------------------------|----------------------------|---|-----------------------------|--|--------------|---|
|                         |                            |   | type                        | description  | type         | description   |
| 9.14                    | -                          | Endurance                                     | 122/<br>123                 | 2000 h at 125 °C, $U_R^{**}$<br>applied.   |              | No visible damage, marking legible;<br>d.c. leakage current $\leq$ stated limit,<br>$\tan \delta \leq 1,2$ x stated limit, insulation<br>resistance $> 100 M\Omega$ , no breakdown<br>or flashover below 1000 V, $\Delta C/C \leq 10\%$ . |
|                         |                            |   | 121                         | 5000 h at 125 °C, $U_R^\Delta$<br>applied.   |              |   |
|                         |                            |   |                             | 5000 h at 85 °C, $U_R$ applied.  |              |   |
| 9.15                    | -                          | Surge   |                             | From source of 1,15 x $U_R$ at 85 °C or<br>1,15 x derated voltage at 125 °C,<br>1000 cycles of 30 s on, 330 s off.                   |              | No visible damage; d.c. leakage current<br>$\leq$ stated limit, $\tan \delta \leq$ stated limit.<br>$\Delta C/C \leq 5\%$ .   |
| 9.16                    | -                          | Reverse voltage                               |                             | 0,30 x $U_R$ in reverse polarity at 85 °C<br>for 125 h, followed by $U_R$ in forward<br>polarity at 85 °C for 125 h.                 |              | D.C. leakage current $\leq$ stated limit,<br>$\tan \delta \leq$ stated limit, $\Delta C/C \leq 10\%$ .  |
|                         |                            |   | 121/<br>123                 | 0,15 x $U_R^\Delta$ in reverse polarity at 125 °C<br>for 125 h, followed by $U_R^\Delta$ in<br>forward polarity at 125 °C for 125 h. |              |   |
|                         |                            |   | 122                         | 0,30 x $U_R^{**}$ in reverse polarity at 125 °C<br>for 125 h, followed by $U_R^{**}$ in<br>forward polarity at 125 °C for 125 h.     |              |   |
| 9.18                    | Ha                         | Storage at upper<br>category tempera-<br>ture |                             | 96 $\pm$ 4 h at upper category temperature.  |              | No visible damage; d.c. leakage current<br>$\leq$ stated limit, * $\tan \delta \leq$ stated limit.<br>$\Delta C/C \leq 5\%$ .   |
|                         |                            |   |                             |  | 121/<br>123  |   |
|                         |                            |   |                             |  | 122          |   |

\* For capacitors 2222 122, 15 s value of d.c. leakage current measured after 5 min.

\*\* 25 V for 40 V versions (capacitors 2222 122).

▲ 40 V for 50 V versions.

# ELECTROLYTIC AND SOLID CAPACITORS

| IEC 384-4<br>sub clause | IEC 68-2<br>test<br>method | name of test                     | procedure (quick reference) |   | requirements |  |
|-------------------------|----------------------------|----------------------------------|-----------------------------|---|--------------|--|
|                         |                            |                                  | type                        | description   | type         | description  |
| 9.20                    |                            | Long storage<br>( $\geq 1$ year) |                             | At ambient temperature.   |              | D.C. leakage current $\leq$ stated limit*  |
|                         |                            |                                  |                             | <b>Step 1:</b> reference measurement at 20 °C of capacitance, impedance at 100 Hz and $\tan \delta$ . |              |  |
|                         |                            |                                  |                             | <b>Step 2:</b> measurement at lower category, 2h<br><b>Step 3:</b> measurement at 85°C, 16 h          |              | Tan $\delta \leq 2 \times$ stated limit, impedance ratio $\leq 2$ , $\Delta C/C \leq 20\%$ .   |
| 9.21                    |                            | Charge and discharge             |                             | $10^6$ cycles of 0.5 s charge to UR and 0.5 s discharge.  |              | D.C. leakage current $\leq 10 \times$ stated limit,*<br>tan $\delta \leq$ stated limit, $\Delta C/C \leq 20\%$ .<br>No visible damage, $\Delta C/C \leq 5\%$ . |

\* For capacitors 2222 122, 15 s value of d.c. leakage current measured after 1 min.


## ALUMINIUM ELECTROLYTIC CAPACITORS





## ALUMINIUM ELECTROLYTIC CAPACITORS

- Low-leakage version of 2222 036 series
- Miniature type
- Single ended
- Long life
- General and industrial applications
- Alternative for tantalum capacitors

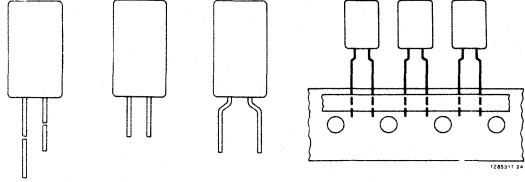

## QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range (E6 series)  | 0,15 to 220 $\mu\text{F}$                         |
| Tolerance on nominal capacitance       | -20 to + 20%*                                     |
| Rated voltage range, $U_R$ (R5 series) | 10 to 25 V  |
| Leakage current after 2 min            | 0,002 CU or 0,7 $\mu\text{A}$                     |
| Category temperature range             | -55 to + 85 $^{\circ}\text{C}$                    |
| Endurance test                         | 2000 h at 85 $^{\circ}\text{C}$                   |
| Shelf life at 0 V                      | 500 h at 85 $^{\circ}\text{C}$                    |
| Basic specification                    | IEC 384-4, long-life grade<br>DIN 41332/DIN 41259 |
| Climatic category                      |   |
| IEC 68                                 | 55/085/56   |
| DIN 40040                              | FPF   |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |
|-----------------------------------|-----------|----|----|
|                                   | 10        | 16 | 25 |
| 0,15                              |           |    | 11 |
| 0,22                              |           |    | 11 |
| 0,33                              |           |    | 11 |
| 0,47                              |           |    | 11 |
| 0,68                              |           |    | 11 |
| 1                                 |           |    | 11 |
| 1,5                               |           |    | 11 |
| 2,2                               |           |    | 11 |
| 3,3                               |           |    | 11 |
| 4,7                               |           |    | 11 |
| 6,8                               |           |    | 11 |
| 10                                |           |    | 11 |
| 15                                |           |    | 11 |
| 22                                |           |    | 11 |
| 33                                |           | 11 | 13 |
| 47                                | 11        |    | 13 |
| 68                                | 11        |    | 13 |
| 100                               |           | 13 |    |
| 150                               | 13        |    |    |
| 220                               | 13        |    |    |

| case size | nominal dimensions (mm)     |
|-----------|-----------------------------|
| 11        | $\varnothing 5 \times 11$   |
| 13        | $\varnothing 8,2 \times 11$ |

\*  $\pm 10\%$  to special order.

**APPLICATION**

These capacitors are suited for those applications where a low leakage current is required. In many cases they are a cost-effective substitute for tantalum capacitors. The capacitors are mainly used for high impedance coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications, such as measuring and regulating circuits. Other applications are in timing and delay circuits with large time constants. The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor has etched and oxidised aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an all-insulated aluminium case.

**MECHANICAL DATA**

Dimensions in mm

The capacitor is available in 6 styles:

- style 1: long leads; in boxes;
- style 2: straight short leads; non preferred, in boxes;
- style 3: bent short leads (only case size 11); non preferred, in boxes;
- style 4: long leads; on tape on reel, positive leading;
- style 5: long leads; on tape in ammunition pack;
- style 6: long leads; on tape on reel, negative leading.

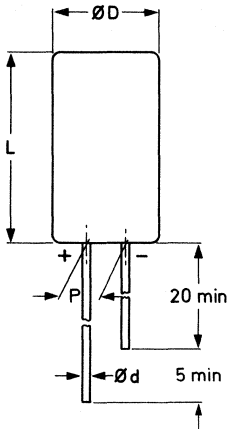


Fig. 1 Style 1; see Table 1 for dimensions d, D, L and P.

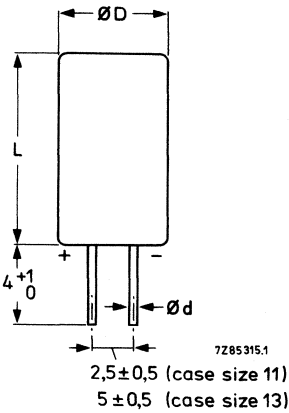


Fig. 2 Style 2; non preferred, see Table 1 for dimensions d, D and L.


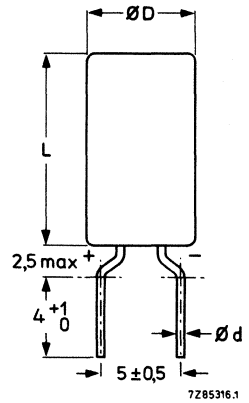


Fig. 3 Style 3; case size 11 only, non preferred, see Table 1 for dimensions d, D and L.

Table 1

| case size | dimensions |                  |                  |     | mass approx. g |
|-----------|------------|------------------|------------------|-----|----------------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |                |
| 11        | 0,5*       | 5,5              | 12,0             | 2,5 | 0,4            |
| 13        | 0,6        | 8,7              | 12,0             | 5,0 | 1,1            |

\* 0,6 mm under consideration.

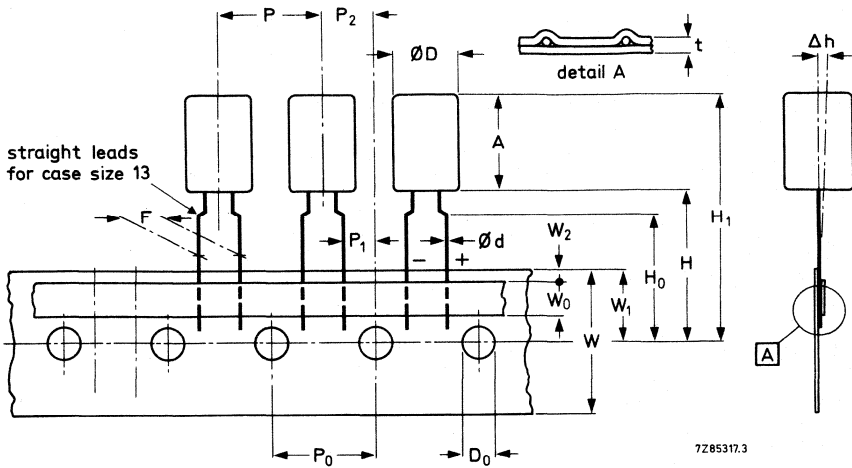

7Z85317.3

→ direction of tape transport (positive leading)

Fig. 4 Styles 4, 5 and 6; see Table 2 for dimensions. For style 6 the tape transport is in opposite direction (negative leading).

Table 2

|                                      | symbol         | case size |      | tol.     |
|--------------------------------------|----------------|-----------|------|----------|
|                                      |                | 11        | 13   |          |
| Body diameter                        | D              | 5,5       | 8,7  | max.     |
| Body height                          | A              | 12,0      | 12,0 | max.     |
| Lead-wire diameter                   | d              | 0,5*      | 0,6  | ± 0,05   |
| Pitch of component                   | P              | 12,7      | 12,7 | ± 1,0    |
| Feed-hole pitch                      | P <sub>0</sub> | 12,7      | 12,7 | ± 0,2**  |
| Hole centre to lead                  | P <sub>1</sub> | 3,85      | 3,85 | ± 0,5    |
| Feed hole centre to component centre | P <sub>2</sub> | 6,35      | 6,35 | ± 0,7    |
| Lead-to-lead distance                | F              | 5,0       | 5,0  | + 0,6/-0 |
| Component alignment                  | Δh             | 0         | 0    | ± 1,0    |
| Tape width                           | W              | 18,0      | 18,0 | ± 0,5    |
| Hold-down tape width                 | W <sub>0</sub> | 6,0       | 6,0  | min.     |
| Hole position                        | W <sub>1</sub> | 9,0       | 9,0  | ± 0,5    |
| Hold-down tape position              | W <sub>2</sub> | 2,5       | 2,5  | max.     |
| Height of component from tape centre | H              | 18,0      | 18,0 | + 1,5/-0 |
| Lead-wire clinch height              | H <sub>0</sub> | 16,0      | —    | ± 0,5    |
| Component height                     | H <sub>1</sub> | 32,0      | 32,0 | max.     |
| Feed-hole diameter                   | D <sub>0</sub> | 4,0       | 4,0  | ± 0,2    |
| Total tape thickness                 | t              | 0,9       | 0,9  | max.     |

\* 0,6 mm under consideration.

\*\* Cumulative pitch error: ± 1 mm/20 pitches.

**Marking**

The capacitors are marked as follows:

*on the top*

- nominal capacitance;
- code letter for tolerance on nominal capacitance, according to IEC62;
- rated voltage;
- polarity identification.

*on the circumference*

- name of manufacturer;
- group number (013);
- code letter of manufacturer;
- date code (year and month) according to IEC 62.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**


Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled; caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 3

| UR | V   | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 2 min $\mu\text{A}$ | max. tan $\delta$ | case size* | catalogue number 2222 013 followed by |         |         |                   |                    | on reel▲ style 6 |
|----|-----|-------------------------|--|---|-------------------|------------|---------------------------------------|---------|---------|-------------------|--------------------|------------------|
|    |     |                         |  |   |                   |            | style 1                               | style 2 | style 3 | on reel** style 4 | in ammpack style 5 |                  |
| 10 |     | 47                      | 55   | 1,0   | 0,16              | 11         | 54479                                 | 84479   | 64479   | 24479             | 34479              | 44479            |
|    |     | 68                      | 70   | 1,4   | 0,16              | 11         | 54689                                 | 84689   | 64689   | 24689             | 34689              | 44689            |
|    |     | 150                     | 130  | 3,0   | 0,16              | 13         | 54151                                 | 64151   |         | 24151             | 34151              | 44151            |
|    |     | 220                     | 160  | 4,4   | 0,16              | 13         | 54221                                 | 64221   |         | 24221             | 34221              | 44221            |
| 16 |     | 33                      | 50   | 1,1   | 0,13              | 11         | 55339                                 | 85339   | 65339   | 25339             | 35339              | 45339            |
|    |     | 100                     | 120  | 3,2   | 0,13              | 13         | 55101                                 | 65101   |         | 25101             | 35101              | 45101            |
| 25 |     | 0,15                    | 5,0  | 0,7   | 0,08              | 11         | 56157                                 | 86157   | 66157   | 26157             | 36157              | 46157            |
|    |     | 0,22                    | 6,5  | 0,7   | 0,06              | 11         | 56227                                 | 86227   | 66227   | 26227             | 36227              | 46227            |
|    |     | 0,33                    | 8,0  | 0,7   | 0,06              | 11         | 56337                                 | 86337   | 66337   | 26337             | 36337              | 46337            |
|    |     | 0,47                    | 9,5  | 0,7   | 0,06              | 11         | 56477                                 | 86477   | 66477   | 26477             | 36477              | 46477            |
|    |     | 0,68                    | 11   | 0,7   | 0,06              | 11         | 56687                                 | 86687   | 66687   | 26687             | 36687              | 46687            |
|    |     | 1,0                     | 13,5   | 0,7   | 0,06              | 11         | 56108                                 | 86108   | 66108   | 26108             | 36108              | 46108            |
|    |     | 1,5                     | 16,5   | 0,7   | 0,06              | 11         | 56158                                 | 86158   | 66158   | 26158             | 36158              | 46158            |
|    |     | 2,2                     | 20   | 0,7   | 0,06              | 11         | 56228                                 | 86228   | 66228   | 26228             | 36228              | 46228            |
|    |     | 3,3                     | 25   | 0,7   | 0,06              | 11         | 56338                                 | 86338   | 66338   | 26338             | 36338              | 46338            |
|    |     | 4,7                     | 29,5   | 0,7   | 0,06              | 11         | 56478                                 | 86478   | 66478   | 26478             | 36478              | 46478            |
|    |     | 6,8                     | 36   | 0,7   | 0,06              | 11         | 56688                                 | 86688   | 66688   | 26688             | 36688              | 46688            |
|    |     | 10                      | 43   | 0,7   | 0,06              | 11         | 56109                                 | 86109   | 66109   | 26109             | 36109              | 46109            |
| 15 | 46  | 0,8                     | 0,08   | 11  | 56159             | 86159      | 66159                                 | 26159   | 36159   | 46159             |                    |                  |
| 22 | 56  | 1,1                     | 0,08   | 11  | 56229             | 86229      | 66229                                 | 26229   | 36229   | 46229             |                    |                  |
| 33 | 105 | 1,7                     | 0,06   | 13  | 56339             | 86339      | 66339                                 | 26339   | 36339   | 46339             |                    |                  |
| 47 | 110 | 2,4                     | 0,08   | 13  | 56479             | 86479      | 66479                                 | 26479   | 36479   | 46479             |                    |                  |
| 68 | 130 | 3,4                     | 0,08   | 13  | 56689             | 86689      | 66689                                 | 26689   | 36689   | 46689             |                    |                  |



\* Case size 11:  $\phi 5$  mm x 11 mm; case size 13:  $\phi 8,2$  mm x 11 mm (nominal dimensions).

\*\* Positive leading.

▲ Negative leading.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 3

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

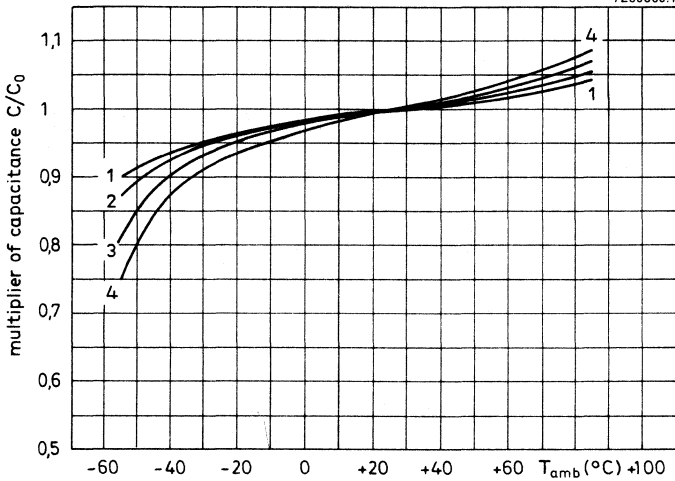


Fig. 5 Typical multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at 20  $^{\circ}\text{C}$ , 100 Hz.

Curve 1 = 25 V; 0,15 to 2,2  $\mu\text{F}$ ;  
 curve 2 = 25 V, 3,3 to 6,8  $\mu\text{F}$ ;

curve 3 = 25 V, 10 to 68  $\mu\text{F}$ ;  
 curve 4 = 10 V/16 V.

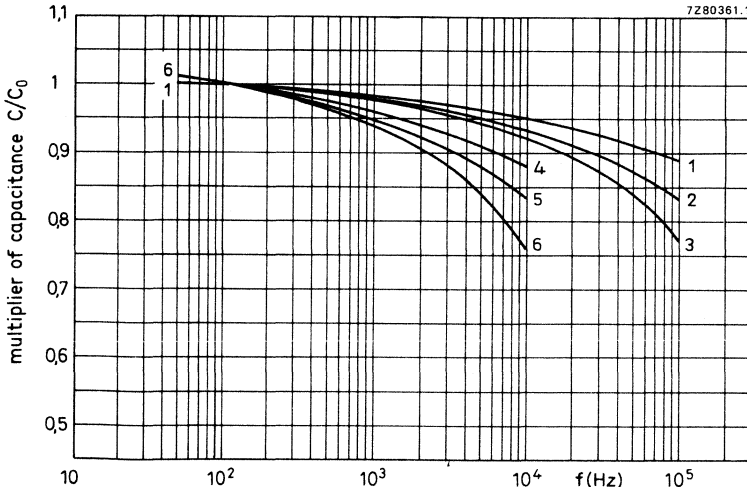


Fig. 6 Typical multiplier of capacitance as a function of frequency;

$C_0$  = capacitance at 20  $^{\circ}\text{C}$ , 100 Hz.

Curve 1 = 25 V, 0,15 to 2,2  $\mu\text{F}$ ;  
 curve 2 = 25 V, 3,3 to 6,8  $\mu\text{F}$ ;  
 curve 3 = 25 V, 10/15  $\mu\text{F}$ ;

curve 4 = 25 V, 22 to 68  $\mu\text{F}$ ;  
 curve 5 = 16 V;  
 curve 6 = 10 V.

**Voltage**Max. permissible voltage at  $\leq 95\text{ }^{\circ}\text{C}$  (core temperature  $\blacktriangle$ )

$1,6 \times U_R$

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

(a) max. (d.c. + peak a.c.) voltage

$1,6 \times U_R$

(b) max. peak a.c. voltage without d.c. voltage applied

$2\text{ V}$

(c) momentary value of applied voltage

between  $1,6 \times U_R$  and  $-2\text{ V}$ 

Surge voltage = max. permissible voltage for short periods

$1,6 \times U_R$

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

$2\text{ V}$

**Ripple current \*\***Maximum permissible r.m.s. ripple current at  
100 Hz and  $T_{\text{amb}} = 85\text{ }^{\circ}\text{C}$ 

see Table 3

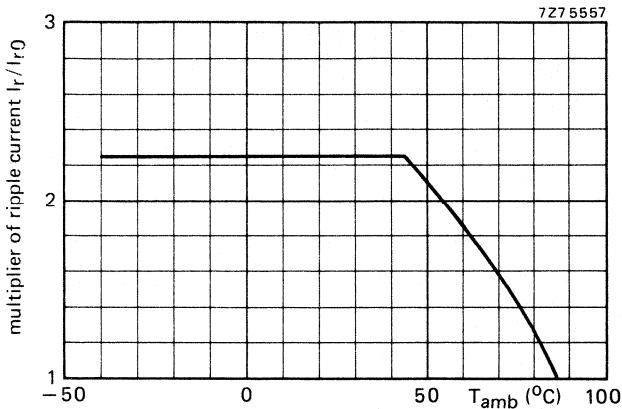


Fig. 7 Typical multiplier of ripple current as a function of ambient temperature;  
 $I_{r0}$  = ripple current at  $85\text{ }^{\circ}\text{C}$ , 100 Hz.

$\blacktriangle$  See Introduction, section 5, "Ripple current".

\* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

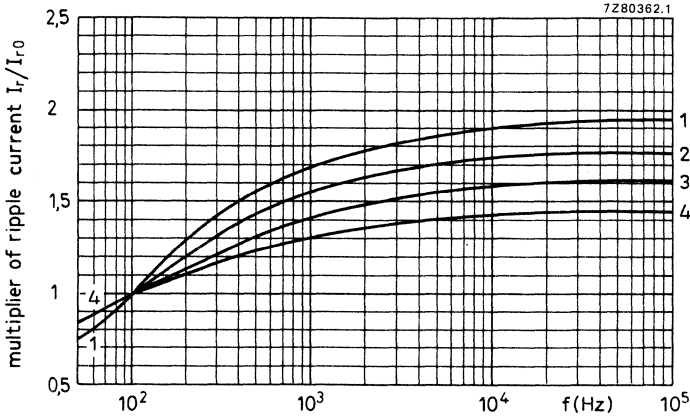


Fig. 8 Typical multiplier of ripple current as a function of frequency;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.  
 Curve 1 = 25 V, 0,15 to 2,2 μF;      curve 3 = 25 V, 10 to 68 μF;  
 curve 2 = 25 V, 3,3 to 6,8 μF;      curve 4 = 10 V, 16 V.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents. The following requirements must then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r \max^2$$

- $I_r \max$  = maximum ripple current at 100 Hz and applicable ambient temperature;
- $I_n$  = ripple current at a certain frequency;
- $\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

There is no limit on the charge or discharge rate. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

**D.C. leakage current**

Maximum d.c. leakage current 2 min after application  
 of  $U_R$  at  $T_{amb} = 20^\circ C$

see Table 3 (0,002 CU or 0,7 μA,  
 whichever is greater)

If owing to prolonged storage and/or storage at an excessive temperature (> 40 °C) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 3.



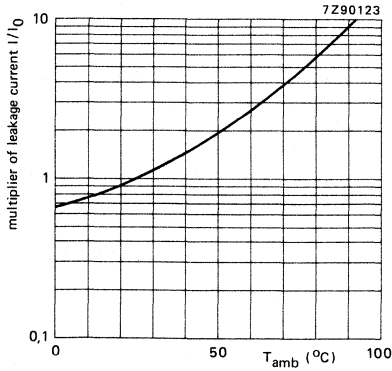


Fig. 9 Multiplier of d.c. leakage current as a function of ambient temperature;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

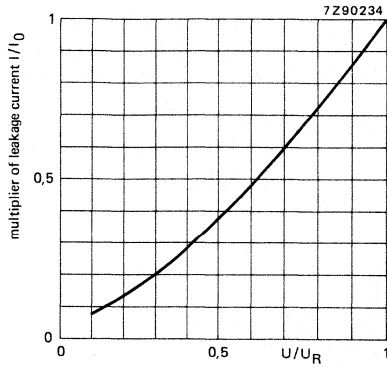


Fig. 10 Multiplier of d.c. leakage current as a function of  $U/U_R$ ;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

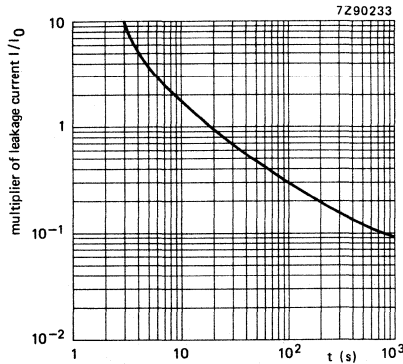


Fig. 11 Multiplier of typical d.c. leakage current as a function of time;  $I_0$  is d.c. leakage current value as specified in Table 3.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25^\circ\text{C}$ ,  
measured by a four-terminal circuit (Thomson circuit)

see Table 3

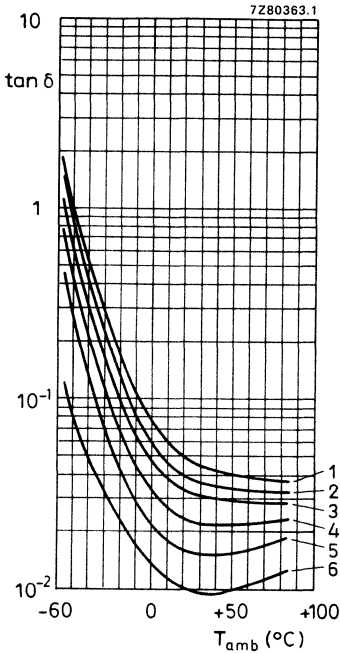


Fig. 12 Typical tan  $\delta$  at 100 Hz as a function of ambient temperature.  
Curve 1 = 10 V;  
curve 2 = 16 V;  
curve 3 = 25 V, 22 to 68  $\mu\text{F}$ ;  
curve 4 = 25 V, 10/15  $\mu\text{F}$ ;  
curve 5 = 25 V, 3,3 to 6,8  $\mu\text{F}$ ;  
curve 6 = 25 V, 0,15 to 2,2  $\mu\text{F}$ .

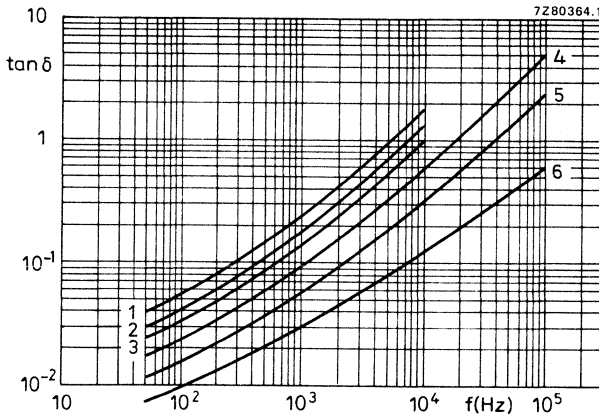


Fig. 13 Typical tan  $\delta$  as a function of frequency at  $T_{amb} = 20^\circ\text{C}$ .  
Curve 1 = 10 V; curve 4 = 25 V, 10/15  $\mu\text{F}$ ;  
curve 2 = 16 V; curve 5 = 25 V, 3,3 to 6,8  $\mu\text{F}$ ;  
curve 3 = 25 V, 22 to 68  $\mu\text{F}$ ; curve 6 = 25 V, 0,15 to 2,2  $\mu\text{F}$ .

**Equivalent series resistance (ESR)**

$$\text{ESR} = \tan \delta / \omega C$$

Maximum  $\tan \delta$  and  $C$  at 100 Hz and  $T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$

see Table 3

**Equivalent series inductance (ESL)**

Case size 11

typ. 13 nH

Case size 13

typ. 16 nH

**Impedance (Z)**

Maximum impedance at  $T_{\text{amb}} = 20 \text{ }^{\circ}\text{C}$ ,  $-25 \text{ }^{\circ}\text{C}$  and  $-40 \text{ }^{\circ}\text{C}$   
and 10 kHz, measured by a four-terminal circuit  
(Thomson circuit)

see Table 4

Maximum ratio between impedances at  $T_{\text{amb}} = -25 \text{ }^{\circ}\text{C}$   
and  $+20 \text{ }^{\circ}\text{C}$  at  $T_{\text{amb}} = -40 \text{ }^{\circ}\text{C}$  and  $+20 \text{ }^{\circ}\text{C}$ , and at  
 $T_{\text{amb}} = -55 \text{ }^{\circ}\text{C}$  and  $+20 \text{ }^{\circ}\text{C}$ , at 100 Hz measured  
by a four-terminal circuit (Thomson circuit)

see Table 4

Table 4

| U <sub>R</sub> | nom. cap. | case size* | maximum impedance at 10 kHz |                              |                              | maximum impedance ratio at U <sub>R</sub> and 100 Hz |                            |                            |
|----------------|-----------|------------|-----------------------------|------------------------------|------------------------------|--|----------------------------|----------------------------|
|                |           |            | T <sub>amb</sub> =<br>20 °C | T <sub>amb</sub> =<br>-25 °C | T <sub>amb</sub> =<br>-40 °C | Z at -25 °C<br>Z at +20 °C                           | Z at -40 °C<br>Z at +20 °C | Z at -55 °C<br>Z at +20 °C |
| V              | μF        |            | Ω                           | Ω                            | Ω                            |  |                            |                            |
| 10             | 47        | 11         | 2,8                         | 11,9                         | 31,9                         | 2  | 3                          | 5                          |
|                | 68        | 11         | 1,9                         | 8,2                          | 22,1                         | 2  | 3                          | 5                          |
|                | 150       | 13         | 0,9                         | 3,7                          | 10,0                         | 2  | 3                          | 5                          |
|                | 220       | 13         | 0,6                         | 2,6                          | 6,8                          | 2  | 3                          | 5                          |
| 16             | 33        | 11         | 2,7                         | 12,1                         | 33,1                         | 1,5  | 2                          | 4                          |
|                | 100       | 13         | 0,9                         | 4,0                          | 11,0                         | 1,5  | 2                          | 4                          |
| 25             | 0,15      | 11         | 300                         | 1070                         | 3870                         | 1,5  | 2                          | 3                          |
|                | 0,22      | 11         | 205                         | 727                          | 2636                         | 1,5  | 2                          | 3                          |
|                | 0,33      | 11         | 136                         | 485                          | 1758                         | 1,5  | 2                          | 3                          |
|                | 0,47      | 11         | 96                          | 340                          | 1234                         | 1,5  | 2                          | 3                          |
|                | 0,68      | 11         | 66                          | 235                          | 853                          | 1,5  | 2                          | 3                          |
|                | 1,0       | 11         | 45                          | 160                          | 580                          | 1,5  | 2                          | 3                          |
|                | 1,5       | 11         | 30                          | 107                          | 387                          | 1,5  | 2                          | 3                          |
|                | 2,2       | 11         | 20,5                        | 72,7                         | 264                          | 1,5  | 2                          | 3                          |
|                | 3,3       | 11         | 13,6                        | 48,5                         | 176                          | 1,5  | 2                          | 3                          |
|                | 4,7       | 11         | 9,6                         | 34,0                         | 123                          | 1,5  | 2                          | 3                          |
|                | 6,8       | 11         | 6,6                         | 23,5                         | 85,3                         | 1,5  | 2                          | 3                          |
|                | 10        | 11         | 6,0                         | 25,0                         | 75                           | 1,5  | 2                          | 3                          |
|                | 15        | 11         | 4,0                         | 16,7                         | 50                           | 1,5  | 2                          | 3                          |
|                | 22        | 11         | 3,2                         | 13,6                         | 40,9                         | 1,5  | 2                          | 3                          |
|                | 33        | 13         | 1,4                         | 4,9                          | 17,6                         | 1,5  | 2                          | 3                          |
|                | 47        | 13         | 1,3                         | 5,3                          | 15,6                         | 1,5  | 2                          | 3                          |
|                | 68        | 13         | 1,0                         | 4,4                          | 13,2                         | 1,5  | 2                          | 3                          |

\* Case size 11: φ 5 mm x 11 mm; case size 13: φ 8,2 mm x 11 mm (nominal dimensions).

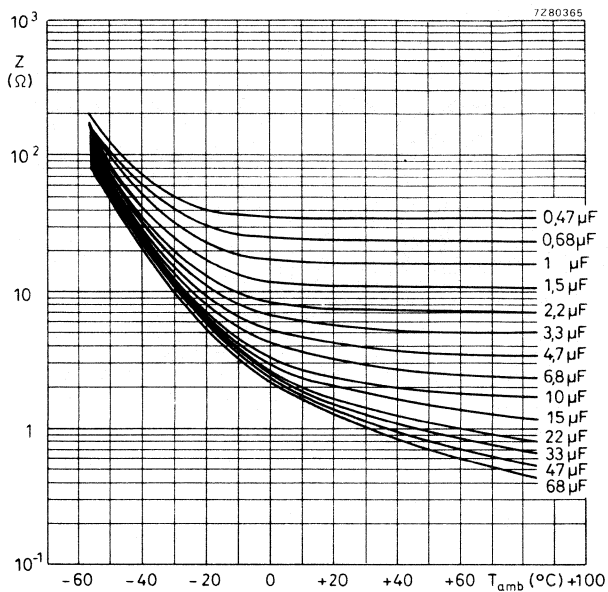


Fig. 14 Typical impedance at 10 kHz as a function of ambient temperature, case size 11.

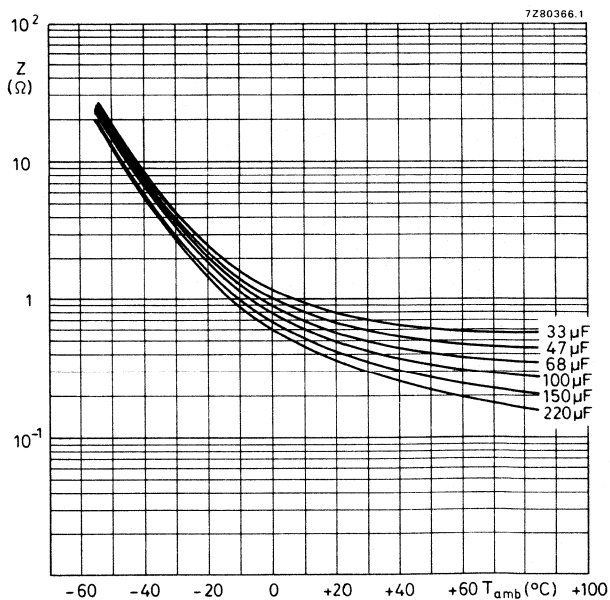


Fig. 15 Typical impedance at 10 kHz as a function of ambient temperature, case size 13.

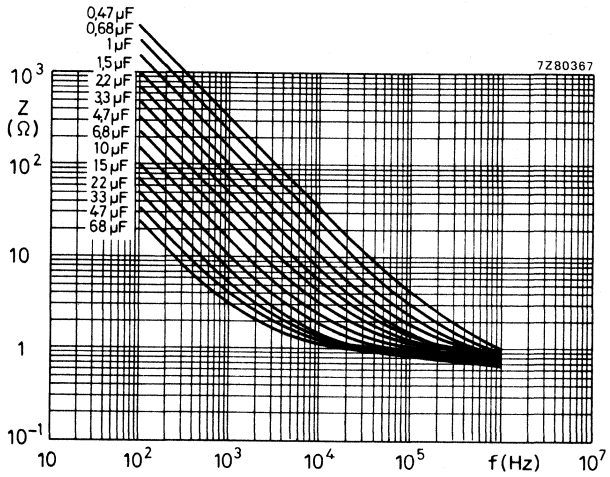


Fig. 16 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 11.

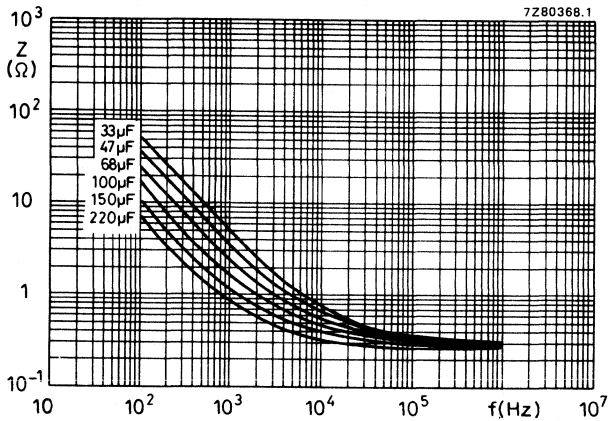


Fig. 17 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 13.

**OPERATIONAL DATA**

|  |               |
|--|---------------|
| Category temperature range                     | -55 to +85 °C |
| Typical life time                              |               |
| at $T_{amb} = 40\text{ °C}$                    | 70 000 h      |
| at $T_{amb} = 85\text{ °C}$                    | 3 000 h       |
| at $T_{amb} = 95\text{ °C}$                    | 1 500 h       |
| at $T_{amb} = 105\text{ °C}$                   | 750 h         |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h         |

**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4, 6 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 5.

Table 5

| case size | number of capacitors |                    |                    |                                      |                                |
|-----------|----------------------|--------------------|--------------------|--------------------------------------|--------------------------------|
|           | style 1<br>per box   | style 2<br>per box | style 3<br>per box | styles 4 and 6<br>per reel<br>(min.) | style 5<br>per ammunition pack |
| 11        | 1000                 | 1000               | 1000               | 1000                                 | 2000                           |
| 13        | 1000                 | 1000               | 1000               | 500                                  | 1000                           |

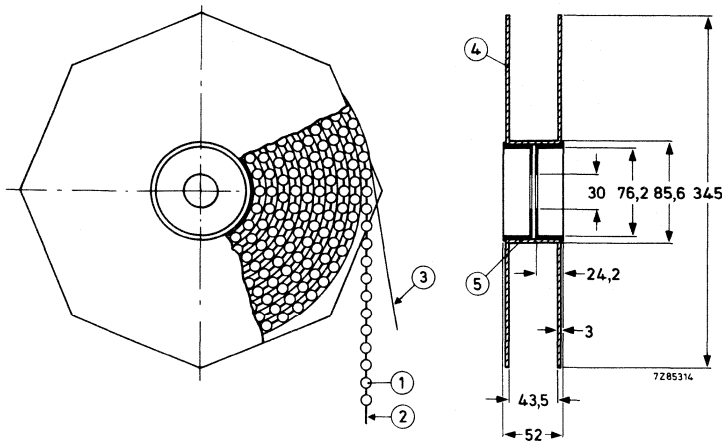


Fig. 18 Capacitors (style 4) on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder

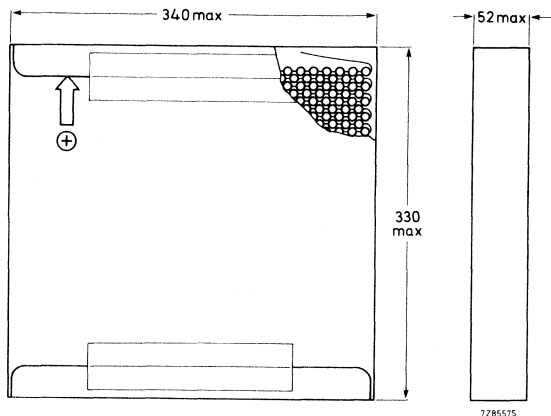


Fig. 19 Capacitors (style 5) on tape in ammunition pack.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test, 2000 h, 85 °C*, the capacitors meet the following requirements:

$$\Delta C/C \leq \pm 15\%;$$

$$\tan \delta \leq 130\% \text{ of specified value};$$

d.c. leakage current  $\leq$  specified value.


After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test, except for leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 013 are miniature, long-life grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads and single ended
- Long life
- Low impedance, high ripple current
- For Switched Mode Power Supplies (SMPS)

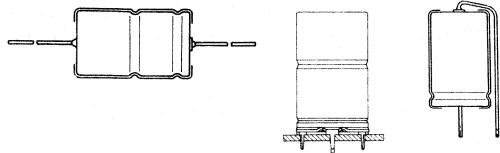

### QUICK REFERENCE DATA

|  |  |
|--|--|
| Nominal capacitance range<br>(E6 series):  | 1 to 10 000 $\mu\text{F}$                            |
| Tolerance on nominal capacitance:          | -10 to +50%  |
| Rated voltage range, $U_R$<br>(R5 series): | 6,3 to 100 V   |
| Category temperature range:                | -55 to +85 $^{\circ}\text{C}$                        |
| Endurance test at 85 $^{\circ}\text{C}$ :  | 2000 h   |
| Shelf life at 0 V; 85 $^{\circ}\text{C}$ : | 500 h  |
| Basic specifications:                      | IEC 384-4, long-life grade<br>DIN 41316<br>DIN 41240 |
| Climatic category                          |  |
| IEC 68:                                    | 55/085/56  |
| DIN 40040:                                 | FPF  |

Selection chart for  $C_{\text{nom}}$ - $U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |    |      |      |      |
|-----------------------------------|-----------|------|------|----|------|------|------|
|                                   | 6,3       | 10   | 16   | 25 | 40   | 63   | 100  |
| 1                                 |           |      |      |    |      | 3    |      |
| 1,5                               |           |      |      |    |      | 3    |      |
| 2,2                               |           |      |      |    |      | 3    |      |
| 3,3                               |           |      |      |    |      | 3    |      |
| 4,7                               |           |      |      |    |      | 3    | 3    |
| 6,8                               |           |      |      |    |      | 3    |      |
| 10                                |           |      |      |    |      | 3    | 4/5a |
| 15                                |           |      |      |    | 3    | 4/5a | 5    |
| 22                                |           |      |      |    | 3    | 4/5a | 5    |
| 33                                |           |      |      | 3  | 4/5a | 5    | 6    |
| 47                                |           |      | 3    |    | 4/5a | 5    | 7    |
| 68                                |           | 3    | 4/5a |    | 5    | 6    | !    |
| 100                               | 3         |      | 4/5a | 5  | 6    | 7    | 01   |
| 150                               |           | 4/5a | 5    | 6  | 7    | !    | 00   |
| 220                               | 4/5a      |      | 5    | 6  | 7/00 | 01   | 03   |
| 330                               | 5         |      | 6    | 7  | !    | 01   | 02   |
| 470                               |           | 6    | 7    | !  | 00   | 01   | 02   |
| 680                               |           | 7    | !    | 00 | 01   | 02   | 03   |
| 1000                              |           | 00   | 01   | 02 | 03   | 05   |      |
| 1500                              | 00        | 01   | 02   | 03 | 04   | 05   |      |
| 2200                              | 01        | 02   | 03   | 04 | 05   |      |      |
| 3300                              | 02        | 03   | 04   | 05 | 05   |      |      |
| 4700                              | 03        | 04   | 05   | 05 |      |      |      |
| 6800                              | 04        | 05   | 05   |    |      |      |      |
| 10000                             | 05        | 05   | 05   |    |      |      |      |

| case size | nominal dimensions (mm) |           |
|-----------|-------------------------|-----------|
| 3         | $\varnothing$ 6 x 10    | miniature |
| 5a        | $\varnothing$ 8 x 11    |           |
| 4         | $\varnothing$ 6,5 x 18  |           |
| 5         | $\varnothing$ 8 x 18    |           |
| 6         | $\varnothing$ 10 x 18   |           |
| 7         | $\varnothing$ 10 x 25   |           |
| 00        | $\varnothing$ 10 x 30   |           |
| 01        | $\varnothing$ 12,5 x 30 |           |
| 02        | $\varnothing$ 15 x 30   |           |
| 03        | $\varnothing$ 18 x 30   |           |
| 04        | $\varnothing$ 18 x 40   |           |
| 05        | $\varnothing$ 21 x 40   |           |

\* Case sizes 3 to 7 (miniature types) are still under development; information on these capacitors is derived from development samples, and does not necessarily imply that they will go into regular production.

**APPLICATION**

These capacitors with high CU-product per unit volume are designed for use in switched-mode power supplies (SMPS) or other applications where high ripple currents at high frequencies occur. Their low ESR,  $\tan \delta$  and impedance values, even at high frequencies and low temperatures render them suitable for bypass and coupling applications in high-frequency equipment.

**DESCRIPTION**

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitors are available in 3 styles, all with soldered-copper leads.

Style 1: axial leads; all case sizes; case sizes 3 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 02 to 05.

Style 3: single ended; case sizes 3 to 7 and 00 to 02.

**MECHANICAL DATA**

Dimensions in mm

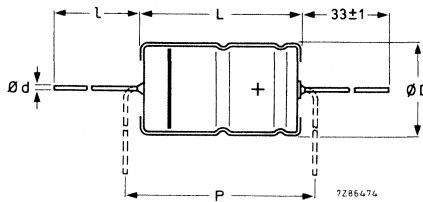


Fig. 1 Style 1; see Table 1a for dimensions d, D, L, l and P.

**Table 1a**

| case size | d   | l      | style 1          |                  |                  |                  |                  | mass approx. g |
|-----------|-----|--------|------------------|------------------|------------------|------------------|------------------|----------------|
|           |     |        | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| 3         | 0,6 | *      | 6,0              | 10,0             | 6,3              | 10,5             | 15               | 0,70           |
| 5a        | 0,6 | *      | 8,0              | 11,0             | 8,5              | 11,5             | 15               | 1,1            |
| 4         | 0,8 | *      | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | 0,8 | *      | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | 0,8 | *      | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | 0,8 | *      | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 0,8 | 55 ± 1 | 10,0             | 30,0             | 10,5             | 30,5             | 35,0             | 4              |
| 01        | 0,8 | 55 ± 1 | 12,5             | 30,0             | 13,0             | 30,5             | 35,0             | 6,3            |
| 02        | 0,8 | 55 ± 1 | 15,0             | 30,0             | 15,5             | 30,5             | 35,0             | 8,2            |
| 03        | 0,8 | 55 ± 1 | 18,0             | 30,0             | 18,5             | 30,5             | 35,0             | 10,9           |
| 04        | 0,8 | 34 ± 1 | 18,0             | 40,0             | 18,5             | 41,5             | 45,0             | 14             |
| 05        | 0,8 | 34 ± 1 | 21,0             | 40,0             | 21,5             | 41,5             | 45,0             | 19             |

\* Case sizes 3 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).

Table 1b

| case size | style 2        |                |      |                   |            |        | mass approx. g |
|-----------|----------------|----------------|------|-------------------|------------|--------|----------------|
|           | d <sub>1</sub> | d <sub>2</sub> | D1   | D2 <sub>max</sub> | D3         | L      |                |
| 02        | 0,8            | 1 + 0,1        | 15,0 | 17,5              | 16,5 ± 0,2 | 31 ± 1 | 8,6            |
| 03        | 0,8            | 1 + 0,1        | 18,0 | 19,5              | 18,5 ± 0,2 | 31 ± 1 | 11,5           |
| 04        | 1,0            | 1,3 + 0,1      | 18,0 | 19,5              | 18,5 ± 0,2 | 42 ± 1 | 14,5           |
| 05        | 1,0            | 1,3 + 0,1      | 21,0 | 22,5              | 21,5 ± 0,2 | 42 ± 1 | 19,7           |

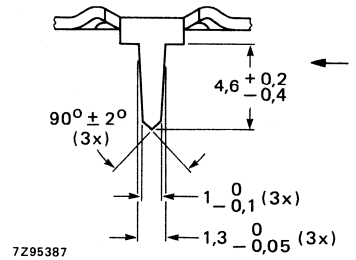
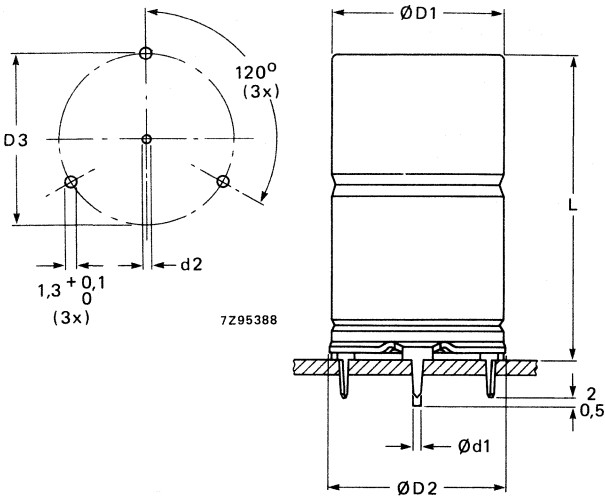


Fig. 2 Style 2; see Table 1b for dimensions d<sub>1</sub>, d<sub>2</sub>, D1, D2, D3 and L.

Table 1c

| case size | d   | style 3          |                  |           | mass approx. g |
|-----------|-----|------------------|------------------|-----------|----------------|
|           |     | D <sub>max</sub> | L <sub>max</sub> | P         |                |
| 3         | 0,6 | 6,3              | 12,5             | 3,5—7,5   | 0,55           |
| 5a        | 0,6 | 8,5              | 13,0             | 5—10      | 1,0            |
| 4         | 0,8 | 6,9              | 21,5             | 5—10      | 1,2            |
| 5         | 0,8 | 8,5              | 21,5             | 5—10      | 1,6            |
| 6         | 0,8 | 10,5             | 21,5             | 7,5—12,5  | 2,3            |
| 7         | 0,8 | 10,5             | 28,0             | 7,5—12,5  | 3,1            |
| 00        | 0,8 | 10,5             | 34,0             | 7,5—12,5  | 3,8            |
| 01        | 0,8 | 13,0             | 34,0             | 7,5—12,5  | 6,1            |
| 02        | 0,8 | 15,5             | 34,0             | 10,0—15,0 | 8,0            |




Fig. 3 Style 3 see Table 1c for dimensions d, D, L and P.

**Marking**

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal (not for case sizes 3 and 5a).

**Mounting**

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameters are shown in Table 1d.

**Table 1d**

| style   | lead/pin diameter | required hole diameter |
|---------|-------------------|------------------------|
| 1 and 3 | 0,6 mm lead       | 0,8 + 0,1 mm           |
|         | 0,8 mm lead       | 1,0 + 0,1 mm           |
| 2       | 0,8 mm anode pin  | 1 + 0,1 mm             |
|         | 1,0 mm anode pin  | 1,3 + 0,1 mm           |
|         | cathode pins      | 1,3 + 0,1 mm           |

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C (mA) | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>mΩ | max. impedance<br>mΩ |            | case size | catalogue number*<br>2222 014<br>followed by |
|----------------|-----------|---|---|------------|----------------|----------------------|------------|-----------|--|
|                |           |   |   |            |                | at 10 kHz            | at 100 kHz |           |  |
| V              | μF        |   |   |            |                |                      |            |           |  |
| 6,3            | 100       | 75  | 7,8   | 0,20       | 3200           | 1700                 | 1500       | 3         | .3101  |
|                | 220       | 135   | 12,5  | 0,20       | 1450           | 770                  | 680        | 5a        | **   |
|                | 220       | 145   | 12,5  | 0,20       | 1450           | 770                  | 680        | 4         | .3221  |
|                | 330       | 200   | 16,5  | 0,20       | 960            | 520                  | 460        | 5         | .3331  |
|                | 1500      | 525   | 61  | 0,26       | 290            | 250                  | 220        | 00        | .3152  |
|                | 2200      | 700   | 88  | 0,27       | 205            | 180                  | 140        | 01        | .3222  |
|                | 3300      | 900   | 129   | 0,30       | 150            | 100                  | 90         | 02        | .3332  |
|                | 4700      | 1170  | 182   | 0,32       | 114            | 70                   | 80         | 03        | .3472  |
|                | 6800      | 1470  | 261   | 0,37       | 91             | 50                   | 60         | 04        | .3682  |
|                | 10 000    | 1800  | 382   | 0,43       | 72             | 50                   | 60         | 05        | .3103  |
| 10             | 68        | 70  | 8,1   | 0,14       | 3300           | 2100                 | 1750       | 3         | .4689  |
|                | 150       | 130   | 13  | 0,14       | 1500           | 930                  | 800        | 4         | .4151  |
|                | 150       | 140   | 13  | 0,14       | 1500           | 930                  | 800        | 5a        | **   |
|                | 470       | 325   | 32  | 0,14       | 470            | 300                  | 260        | 6         | .4471  |
|                | 680       | 445   | 45  | 0,14       | 330            | 210                  | 180        | 7         | .4681  |
|                | 1000      | 470   | 64  | 0,18       | 300            | 180                  | 160        | 00        | .4102  |
|                | 1500      | 700   | 94  | 0,19       | 212            | 160                  | 140        | 01        | .4152  |
|                | 2200      | 850   | 136   | 0,20       | 152            | 100                  | 90         | 02        | .4222  |
|                | 3300      | 1000  | 202   | 0,22       | 111            | 80                   | 70         | 03        | .4332  |
|                | 4700      | 1500  | 286   | 0,24       | 85             | 50                   | 60         | 04        | .4472  |
|                | 6800      | 1800  | 412   | 0,28       | 69             | 50                   | 60         | 05        | .4682  |
|                | 10 000    | 2260  | 604   | 0,30       | 50             | 50                   | 60         | 05        | .4103  |

- \* Replace dot in catalogue number by:
- 1 for style 1, case sizes 00 to 05, supplied in box;
  - 2 for style 1 on bandoliers on reel (preferred for case sizes 3 and 4)
  - 3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7)
  - 4 for style 2; case sizes 02 to 05;
  - 8 for style 3; case sizes 3 to 02.
- } case sizes 3 to 7

\*\* See Table 3.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C (mA) | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>mΩ | max. impedance<br>mΩ |            | case size | catalogue number*<br>2222 014 followed by |       |
|----------------|-----------|---|---|------------|----------------|----------------------|------------|-----------|---|-------|
|                | μF        |   |   |            |                | at 10 kHz            | at 100 kHz |           |   |       |
| 16             | 47        | 65  | 8,5   | 0,11       | 3700           | 2100                 | 1700       | 3         | .5479                                     |       |
|                | 68        | 100   | 10,5  | 0,11       | 2600           | 1450                 | 1200       | 5a        | **  |       |
|                | 68        | 105   | 10,5  | 0,11       | 2600           | 1450                 | 1200       | 4         | .5689                                     |       |
|                | 100       | 125   | 13,5  | 0,11       | 1750           | 1000                 | 800        | 5a        | **  |       |
|                | 100       | 130   | 13,5  | 0,11       | 1750           | 1000                 | 800        | 4         | .5101                                     |       |
|                | 150       | 180   | 18,5  | 0,11       | 1150           | 670                  | 530        | 5         | .5151                                     |       |
|                | 220       | 220   | 25  | 0,11       | 800            | 450                  | 360        | 5         | .5221                                     |       |
|                | 330       | 305   | 36  | 0,11       | 530            | 300                  | 240        | 6         | .5331                                     |       |
|                | 470       | 415   | 49  | 0,11       | 370            | 210                  | 170        | 7         | .5471                                     |       |
|                | 680       | 500   | 70  | 0,13       | 320            | 180                  | 160        | 00        | .5681                                     |       |
|                | 1000      | 715   | 100   | 0,13       | 218            | 110                  | 100        | 01        | .5102                                     |       |
|                | 1500      | 900   | 148   | 0,14       | 156            | 100                  | 100        | 02        | .5152                                     |       |
|                | 2200      | 1270  | 215   | 0,15       | 114            | 70                   | 80         | 03        | .5222                                     |       |
|                | 3300      | 1560  | 321   | 0,17       | 86             | 50                   | 60         | 04        | .5332                                     |       |
|                | 4700      | 1820  | 455   | 0,20       | 71             | 50                   | 60         | 05        | .5472                                     |       |
|                | 6800      | 2000  | 654   | 0,24       | 59             | 50                   | 60         | 05        | .5682                                     |       |
|                | 10000     | 2400  | 984   | 0,26       | 44             | 50                   | 60         | 05        | .5103                                     |       |
|                | 25        | 33  | 65  | 9          | 0,09           | 4300                 | 2100       | 1800      | 3   | .6339 |
|                |           | 100   | 165   | 19         | 0,09           | 1450                 | 700        | 600       | 5   | .6101 |
|                |           | 150   | 230   | 27         | 0,09           | 950                  | 470        | 400       | 6   | .6151 |
| 220            |           | 280   | 37  | 0,09       | 650            | 320                  | 270        | 6         | .6221                                     |       |
| 330            |           | 390   | 54  | 0,09       | 430            | 210                  | 180        | 7         | .6331                                     |       |
| 470            |           | 540   | 74  | 0,11       | 392            | 180                  | 160        | 00        | .6471                                     |       |
| 680            |           | 600   | 106   | 0,12       | 295            | 130                  | 110        | 01        | .6681                                     |       |
| 1000           |           | 920   | 154   | 0,12       | 200            | 100                  | 100        | 02        | .6102                                     |       |
| 1500           |           | 1040  | 229   | 0,13       | 145            | 70                   | 80         | 03        | .6152                                     |       |
| 2200           |           | 1480  | 334   | 0,13       | 99             | 50                   | 60         | 04        | .6222                                     |       |
| 3300           |           | 1800  | 500   | 0,14       | 71             | 50                   | 60         | 05        | .6332                                     |       |
| 4700           |           | 2140  | 709   | 0,15       | 54             | 50                   | 60         | 05        | .6472                                     |       |

\* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 3 and 4) } case sizes 3 to 7

3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) }

4 for style 2; case sizes 02 to 05;

8 for style 3; case sizes 3 to 02.

\*\* See Table 3.

| U <sub>R</sub> | nom. cap.<br>V | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C (mA) | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>mΩ | max. impedance<br>mΩ |            | case size | catalogue number*<br>2222 014 followed by |
|----------------|----------------|---|---|------------|----------------|----------------------|------------|-----------|---|
|                |                |   |   |            |                | at 10 kHz            | at 100 kHz |           |   |
| 40             | 15             | 45  | 7,6   | 0,08       | 8500           | 3300                 | 3000       | 3         | .7159                                     |
|                | 22             | 55  | 9,3   | 0,08       | 5800           | 2300                 | 2000       | 3         | .7229                                     |
|                | 33             | 85  | 12  | 0,08       | 3900           | 1500                 | 1350       | 5a        | **  |
|                | 33             | 90  | 12  | 0,08       | 3900           | 1500                 | 1350       | 4         | .7339                                     |
|                | 47             | 95  | 15,5  | 0,08       | 2700           | 1050                 | 960        | 5a        | **  |
|                | 47             | 105   | 15,5  | 0,08       | 2700           | 1050                 | 960        | 4         | .7479                                     |
|                | 68             | 145   | 20  | 0,08       | 1850           | 740                  | 660        | 5         | .7689                                     |
|                | 100            | 200   | 28  | 0,08       | 1250           | 500                  | 450        | 6         | .7101                                     |
|                | 150            | 280   | 40  | 0,08       | 850            | 330                  | 300        | 7         | .7151                                     |
|                | 220            | 340   | 57  | 0,08       | 580            | 230                  | 200        | 7         | **  |
|                | 220            | 365   | 57  | 0,08       | 600            | 220                  | 170        | 00        | .7221                                     |
|                | 330            | 500   | 84  | 0,08       | 405            | 150                  | 120        | 01        | .7331                                     |
|                | 470            | 575   | 117   | 0,08       | 285            | 110                  | 110        | 01        | .7471                                     |
|                | 680            | 800   | 167   | 0,08       | 197            | 100                  | 100        | 02        | .7681                                     |
|                | 1000           | 1100  | 244   | 0,08       | 134            | 70                   | 80         | 03        | .7102                                     |
|                | 1500           | 1330  | 364   | 0,10       | 112            | 60                   | 70         | 04        | .7152                                     |
|                | 2200           | 1660  | 532   | 0,11       | 84             | 50                   | 70         | 05        | .7222                                     |
| 3300           | 1900           | 796   | 0,14  | 71         | 50             | 60                   | 05         | .7332     |   |
| 63             | 1              | 13  | 4,4   | 0,06       | 95 000         | 40 000               | 35 000     | 3         | .8108                                     |
|                | 1,5            | 16  | 4,6   | 0,06       | 64 000         | 27 000               | 23 000     | 3         | .8158                                     |
|                | 2,2            | 20  | 4,8   | 0,06       | 43 000         | 18 000               | 16 000     | 3         | .8228                                     |
|                | 3,3            | 24  | 5,2   | 0,06       | 29 000         | 12 000               | 10 500     | 3         | .8338                                     |
|                | 4,7            | 29  | 5,8   | 0,06       | 20 000         | 8500                 | 7400       | 3         | .8478                                     |
|                | 6,8            | 35  | 6,6   | 0,06       | 14 000         | 5900                 | 5100       | 3         | .8688                                     |
|                | 10             | 42  | 7,8   | 0,06       | 9500           | 4000                 | 3500       | 3         | .8109                                     |
|                | 15             | 63  | 9,7   | 0,06       | 6400           | 2700                 | 2300       | 5a        | **  |
|                | 15             | 68  | 9,7   | 0,06       | 6400           | 2700                 | 2300       | 4         | .8159                                     |
|                | 22             | 78  | 12,5  | 0,06       | 4300           | 1800                 | 1600       | 5a        | **  |
|                | 22             | 82  | 12,5  | 0,06       | 4300           | 1800                 | 1600       | 4         | .8229                                     |
|                | 33             | 115   | 16,5  | 0,06       | 2900           | 1200                 | 1050       | 5         | .8339                                     |
|                | 47             | 135   | 22  | 0,06       | 2000           | 850                  | 740        | 5         | .8479                                     |
|                | 68             | 190   | 30  | 0,06       | 1400           | 590                  | 510        | 6         | .8689                                     |
|                | 100            | 260   | 42  | 0,06       | 950            | 400                  | 350        | 7         | .8101                                     |
|                | 150            | 345   | 61  | 0,06       | 670            | 370                  | 220        | 00        | .8151                                     |
|                | 220            | 500   | 87  | 0,06       | 457            | 150                  | 120        | 01        | .8221                                     |
| 330            | 650            | 129   | 0,06  | 305        | 150            | 120                  | 02         | .8331     |   |
| 470            | 870            | 182   | 0,06  | 214        | 100            | 100                  | 02         | .8471     |   |
| 680            | 1030           | 261   | 0,06  | 148        | 80             | 100                  | 03         | .8681     |   |
| 1000           | 1600           | 382   | 0,06  | 100        | 50             | 70                   | 05         | .8102     |   |
| 1500           | 1800           | 571   | 0,08  | 89         | 50             | 70                   | 05         | .8152     |   |

\* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 3 and 4) } case sizes 3 to 7

3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) }

4 for style 2; case sizes 02 to 05;

8 for style 3; case sizes 3 to 02.

\*\* See Table 3.

| U <sub>R</sub><br>V | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C (mA) | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>mΩ | max. impedance<br>mΩ |            | case size | catalogue number*<br>2222 014 followed by |
|---------------------|-----------|---|---|------------|----------------|----------------------|------------|-----------|---|
|                     | μF        |   |   |            |                | at 10 kHz            | at 100 kHz |           |   |
| 100                 | 4,7       | 16  | 6,8   | 0,05       | 17 000         | 7400                 | 6400       | 3         | .9478                                     |
|                     | 10        | 55  | 10  | 0,05       | 8000           | 3500                 | 3000       | 5a        | **  |
|                     | 10        | 60  | 10  | 0,05       | 8000           | 3500                 | 3000       | 4         | .9109                                     |
|                     | 15        | 85  | 13  | 0,05       | 5300           | 2300                 | 2000       | 5         | .9159                                     |
|                     | 22        | 105   | 17  | 0,05       | 3600           | 1600                 | 1350       | 5         | .9229                                     |
|                     | 33        | 140   | 24  | 0,05       | 2400           | 1050                 | 910        | 6         | .9339                                     |
|                     | 47        | 195   | 32  | 0,05       | 1700           | 740                  | 640        | 7         | .9479                                     |
|                     | 100       | 340   | 64  | 0,05       | 838            | 315                  | 200        | 01        | .9101                                     |
|                     | 220       | 650   | 139   | 0,05       | 381            | 150                  | 120        | 03        | .9221                                     |
|                     | 470       | 1090  | 286   | 0,05       | 178            | 100                  | 100        | 05        | .9471                                     |

Table 3

| U <sub>R</sub><br>V | nom. cap.<br>μF | case size | catalogue number                 |                                 |                |
|---------------------|-----------------|-----------|----------------------------------|---------------------------------|----------------|
|                     |                 |           | style 1<br>on bandoliers on reel | style 1<br>on bandoliers in box | style 3        |
| 6,3                 | 220             | 5a        | 2222 014 90534                   | 2222 014 90535                  | 2222 014 90536 |
| 10                  | 150             | 5a        | 2222 014 90501                   | 2222 014 90502                  | 2222 014 90503 |
| 16                  | 68              | 5a        | 2222 014 90504                   | 2222 014 90505                  | 2222 014 90506 |
|                     | 100             | 5a        | 2222 014 90507                   | 2222 014 90508                  | 2222 014 90509 |
| 40                  | 33              | 5a        | 2222 014 90511                   | 2222 014 90512                  | 2222 014 90513 |
|                     | 47              | 5a        | 2222 014 90514                   | 2222 014 90515                  | 2222 014 90516 |
|                     | 220             | 7         | 2222 014 90517                   | 2222 014 90518                  | 2222 014 90519 |
| 63                  | 15              | 5a        | 2222 014 90521                   | 2222 014 90522                  | 2222 014 90523 |
|                     | 22              | 5a        | 2222 014 90524                   | 2222 014 90525                  | 2222 014 90526 |
| 100                 | 10              | 5a        | 2222 014 90527                   | 2222 014 90528                  | 2222 014 90529 |

\* Replace dot in catalogue number by:  
 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel (preferred for case sizes 3 and 4)  
 3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) } case sizes 3 to 7  
 → 4 for style 2; case sizes 02 to 05;  
 8 for style 3; case sizes 3 to 02.

\*\* See Table 3.



**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50%

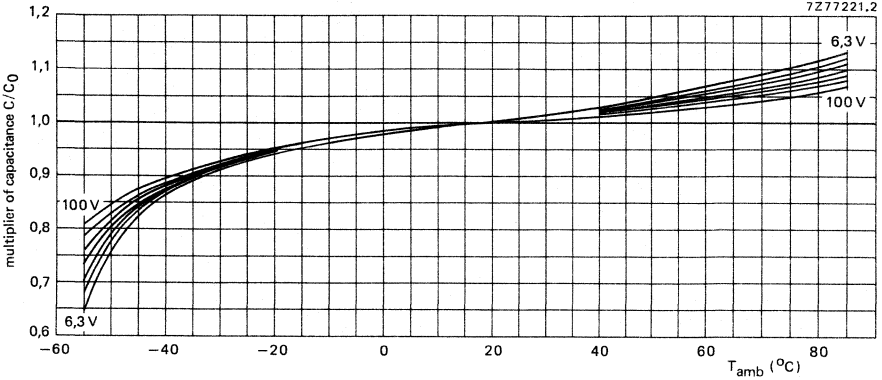


Fig. 4 Multiplier of capacitance as a function of ambient temperature; case sizes 3 to 7;  $C_0$  = capacitance at 20 °C, 100 Hz.

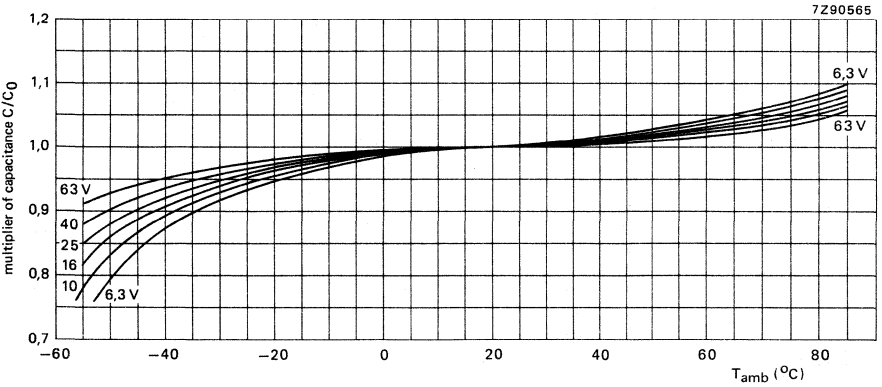


Fig. 5 Multiplier of capacitance as a function of ambient temperature; case sizes 00 to 05;  $C_0$  = capacitance at 20 °C, 100 Hz.

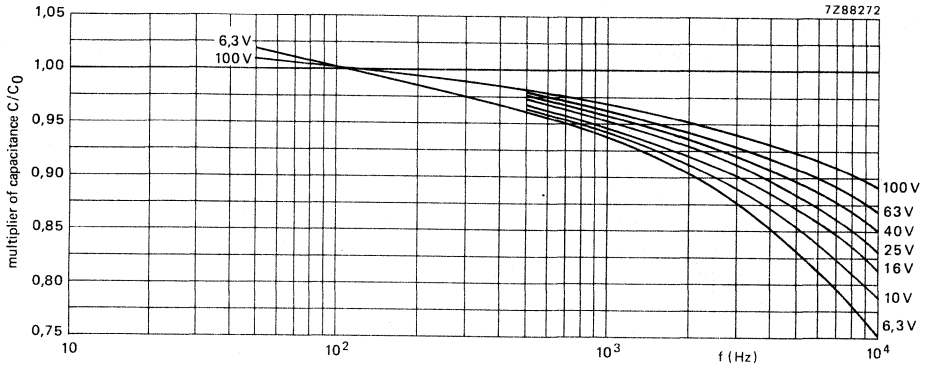


Fig. 6 Multiplier of capacitance as a function of frequency; case sizes 3 to 7;  $C_0$  = capacitance at 20 °C, 100 Hz.

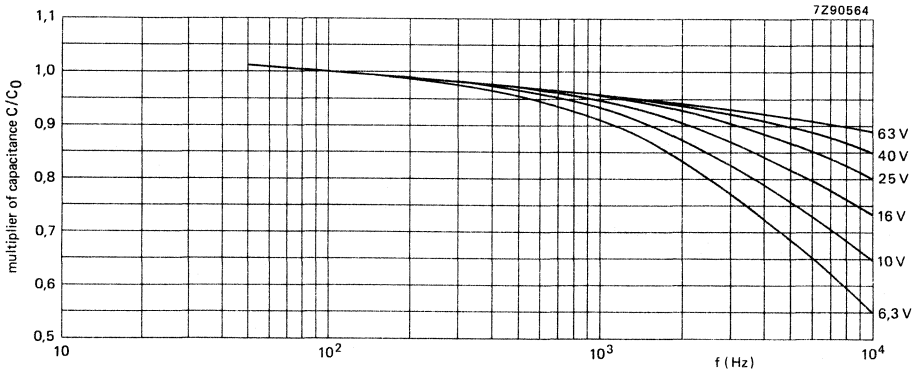


Fig. 7 Multiplier of capacitance as a function of frequency; case sizes 00 to 05;  $C_0$  = capacitance at 20 °C, 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

core temperature ▲ ←

| < 60 °C              | 60 to 95 °C  |
|----------------------|--|
| 1,1 x U <sub>R</sub> | U <sub>R</sub>   |
| 1,1 x U <sub>R</sub> | U <sub>R</sub><br>1 V<br>between U <sub>R</sub> and -2 V |
| 1,2 x U <sub>R</sub> | 1,15 x U <sub>R</sub><br>1 V                             |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and T<sub>amb</sub> = 85 °C

see Table 2

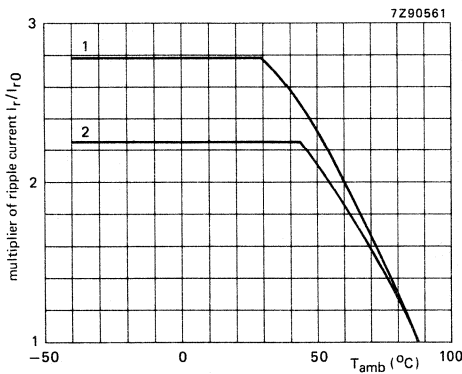


Fig. 8 Multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at 85 °C, 100 Hz.

curve 1 = case sizes 3 to 7;

curve 2 = case sizes 00 to 05.

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

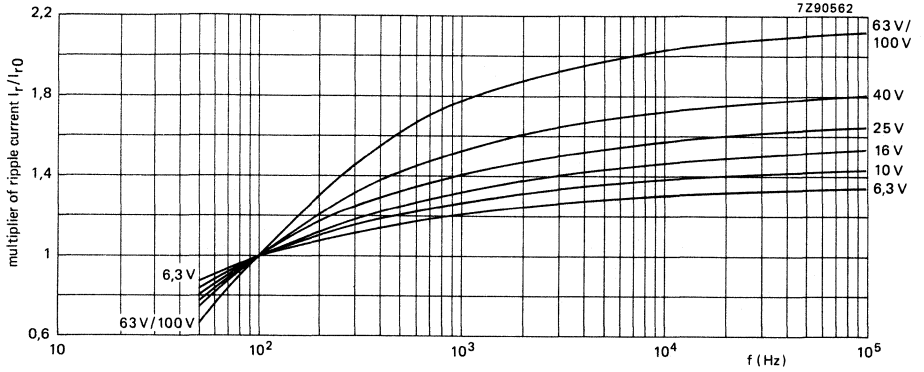


Fig. 9 Multiplier of ripple current as a function of frequency, case sizes 3 to 7;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

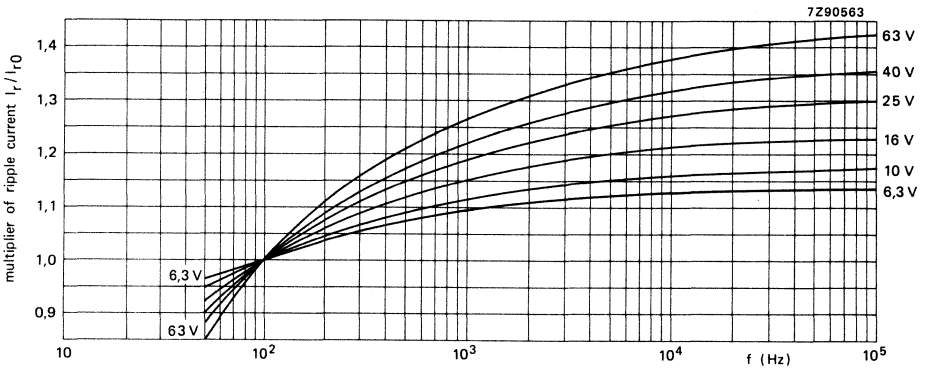


Fig. 10 Multiplier of ripple current as a function of frequency, case sizes 00 to 05;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r / I_{r0}$  = multiplying factor at a same frequency.

#### Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

#### D.C. leakage current

Maximum d.c. leakage current 1 min after application of  $U_R$ , at  $T_{amb} = 25^\circ\text{C}$

see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

Maximum d.c. leakage current 5 min after application of  $U_R$ , at  $T_{amb} = 25^\circ\text{C}$

0,002 CU + 2  $\mu\text{A}$

D.C. leakage current during continuous operation at  $U_R$ ,  
 at  $T_{amb} = 25^\circ\text{C}$ , case sizes 3 to 7  
 at  $T_{amb} = 25^\circ\text{C}$ , case sizes 00 to 05  
 at  $T_{amb} = 85^\circ\text{C}$

0,1 x values of Table 2  
 0,01 x values of Table 2  
 $\leq$  values of Table 2

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

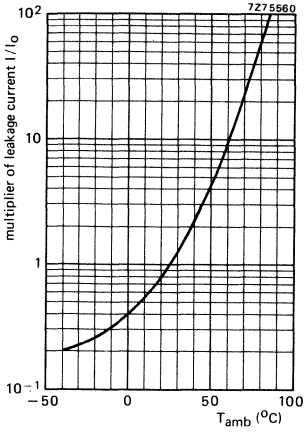


Fig. 11 Multiplier of d.c. leakage current as a function of ambient temperature, **case sizes 00 to 05**;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

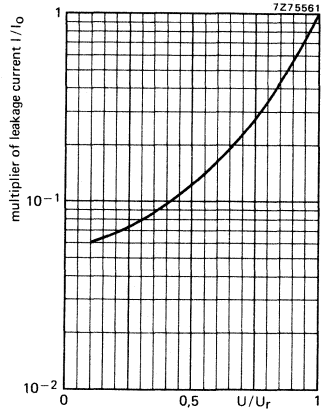


Fig. 12 Multiplier of d.c. leakage current as a function of  $U/U_R$ , **case sizes 00 to 05**;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

Tan  $\delta$  (dissipation factor)

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25^\circ\text{C}$   
measured by means of a four-terminal  
circuit (Thomson circuit)

see Table 2

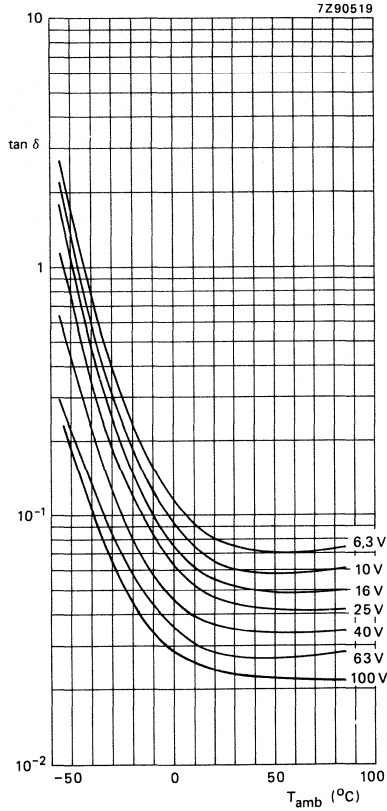


Fig. 13 Typical tan  $\delta$  as a function of ambient temperature at 100 Hz; case sizes 3 to 7.

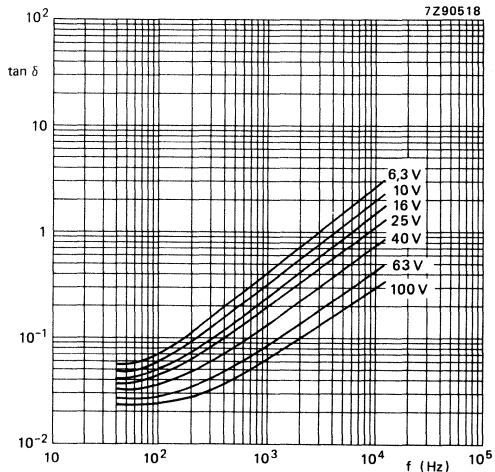


Fig. 14 Typical  $\tan \delta$  as a function of frequency at 25 °C, case sizes 3 to 7.

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2



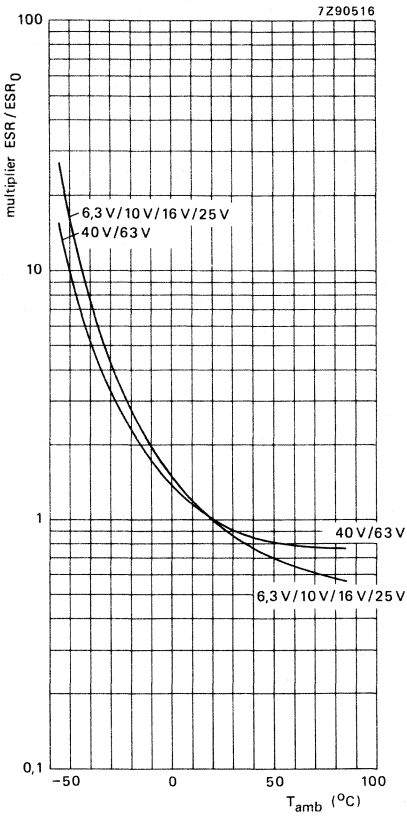


Fig. 15 Multiplier of ESR as a function of ambient temperature, **case sizes 00, 01 and 02**; ESR<sub>0</sub> = typ. ESR at 20 °C, 100 Hz.

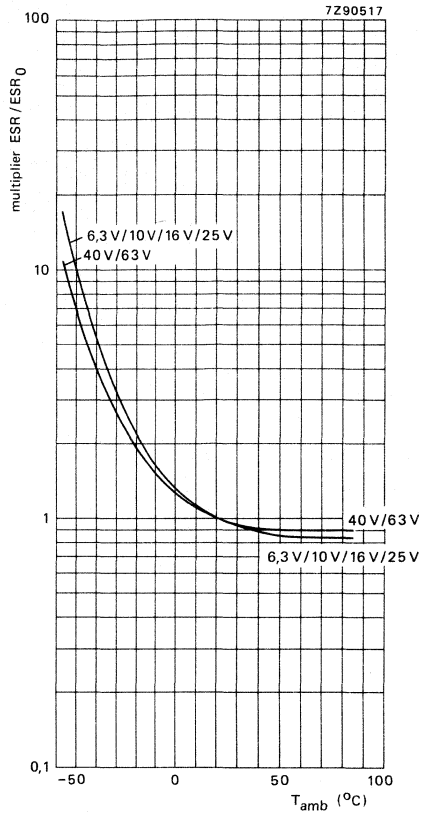


Fig. 16 Multiplier of ESR as a function of ambient temperature, **case sizes 03, 04 and 05**; ESR<sub>0</sub> = typ. ESR at 20 °C, 100 Hz.

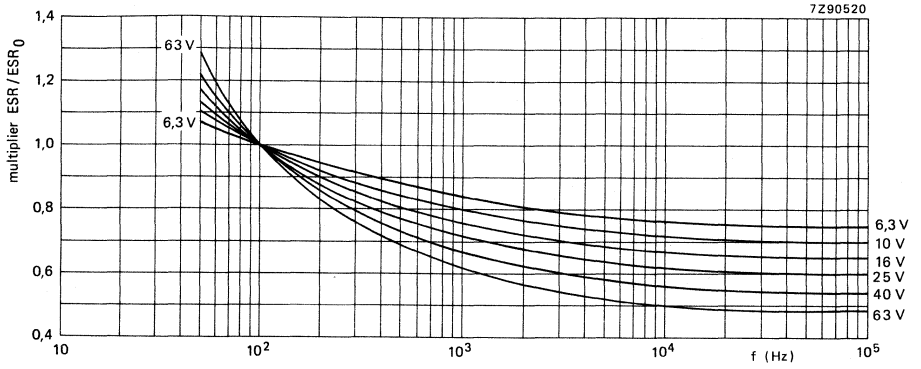


Fig. 17 Multiplier of ESR as a function of frequency, case sizes 00 to 05;  $ESR_0$  = typical ESR at 20 °C, 100 Hz.

**Impedance**

Maximum impedance at  $T_{amb} = 25\text{ °C}$  and 10 kHz or 100 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

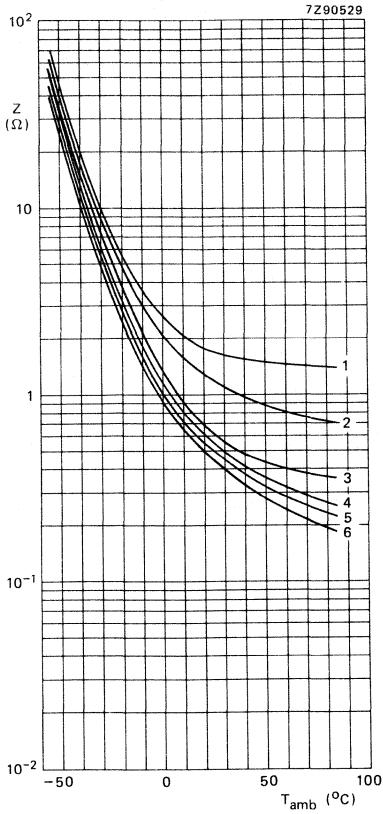


Fig. 18 Typical impedance as a function of ambient temperature at 10 kHz; **case size 3**:  
 curve 1 = 4,7  $\mu$ F, 100 V;  
 curve 2 = 10  $\mu$ F, 63 V;  
 curve 3 = 22  $\mu$ F, 40 V;  
 curve 4 = 47  $\mu$ F, 16 V;  
 curve 5 = 68  $\mu$ F, 10 V;  
 curve 6 = 100  $\mu$ F, 6,3 V.

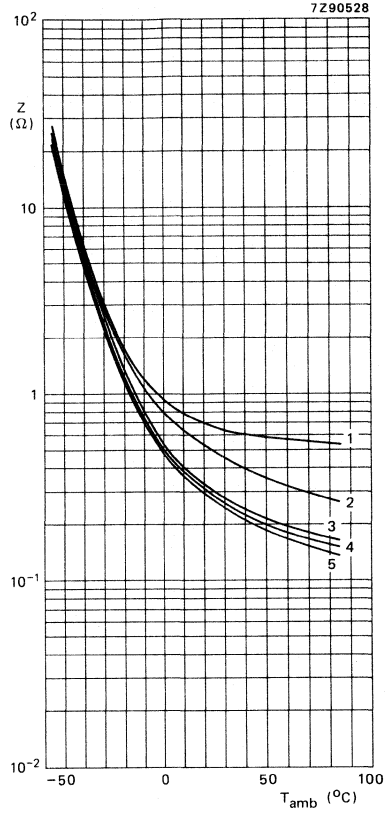


Fig. 19 Typical impedance as a function of ambient temperature at 10 kHz; **case size 5a**:  
 curve 1 = 22  $\mu$ F, 63 V;  
 curve 2 = 47  $\mu$ F, 40 V;  
 curve 3 = 100  $\mu$ F, 16 V;  
 curve 4 = 150  $\mu$ F, 10 V;  
 curve 5 = 220  $\mu$ F, 6,3 V.

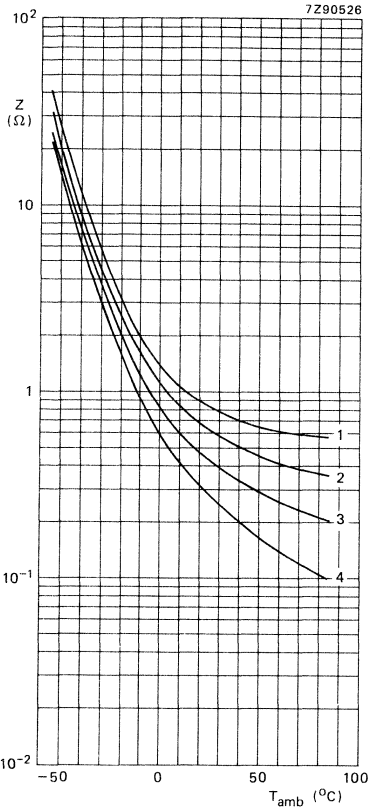


Fig. 20 Typical impedance as a function of ambient temperature at 10 kHz; **case size 4:**  
 curve 1 = 22  $\mu$ F, 63 V;  
 curve 2 = 47  $\mu$ F, 40 V;  
 curve 3 = 100  $\mu$ F, 16 V;  
 curve 4 = 220  $\mu$ F, 6,3 V.

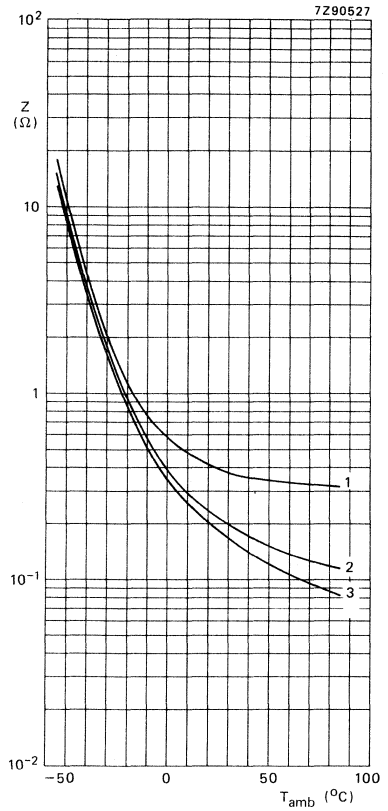


Fig. 21 Typical impedance as a function of ambient temperature at 10 kHz; **case size 5:**  
 curve 1 = 47  $\mu$ F, 63 V;  
 curve 2 = 150  $\mu$ F, 16 V;  
 curve 3 = 330  $\mu$ F, 6,3 V.

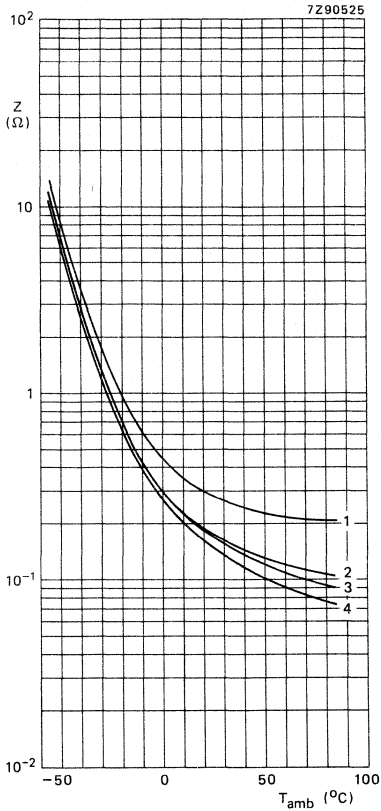


Fig. 22 Typical impedance as a function of ambient temperature at 10 kHz; **case size 6:**

- curve 1 = 68  $\mu F$ , 63 V;
- curve 2 = 150  $\mu F$ , 25 V;
- curve 3 = 220  $\mu F$ , 25 V;
- curve 4 = 330  $\mu F$ , 16 V.

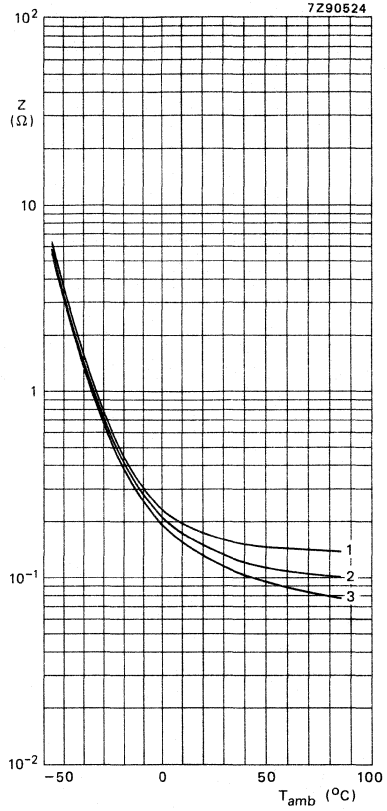


Fig. 23 Typical impedance as a function of ambient temperature at 10 kHz; **case size 7:**

- curve 1 = 100  $\mu F$ , 63 V;
- curve 2 = 220  $\mu F$ , 40 V;
- curve 3 = 470  $\mu F$ , 16 V.

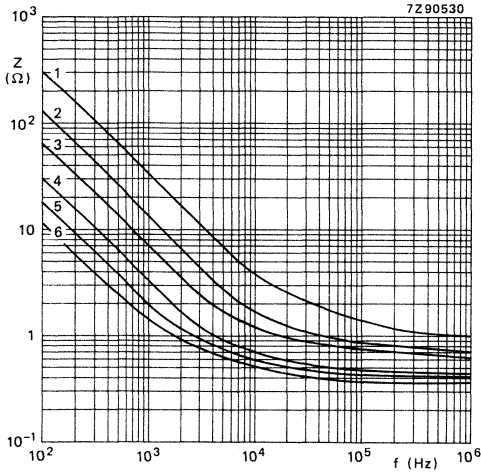


Fig. 24 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;  
**case size 3:**

- curve 1 = 4,7  $\mu\text{F}$ , 100 V;
- curve 2 = 10  $\mu\text{F}$ , 63 V;
- curve 3 = 22  $\mu\text{F}$ , 40 V;
- curve 4 = 47  $\mu\text{F}$ , 16 V;
- curve 5 = 68  $\mu\text{F}$ , 10 V;
- curve 6 = 100  $\mu\text{F}$ , 6,3 V.

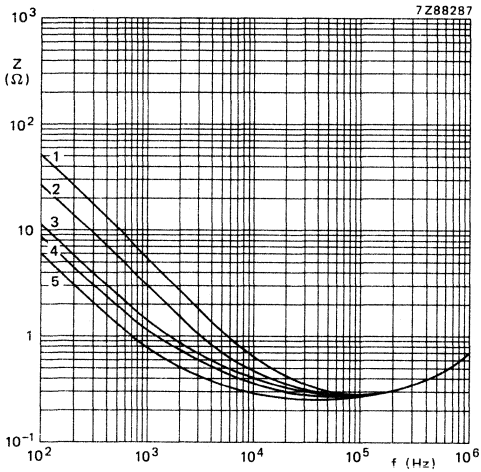


Fig. 25 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;  
**case size 5a:**

- curve 1 = 22  $\mu\text{F}$ , 63 V;
- curve 2 = 47  $\mu\text{F}$ , 40 V;
- curve 3 = 100  $\mu\text{F}$ , 16 V;
- curve 4 = 150  $\mu\text{F}$ , 10 V;
- curve 5 = 220  $\mu\text{F}$ , 6,3 V.

Fig. 26 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;

**case size 4:**

- curve 1 =  $22\text{ }\mu\text{F}$ ,  $63\text{ V}$ ;
- curve 2 =  $47\text{ }\mu\text{F}$ ,  $40\text{ V}$ ;
- curve 3 =  $100\text{ }\mu\text{F}$ ,  $16\text{ V}$ ;
- curve 4 =  $220\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ .

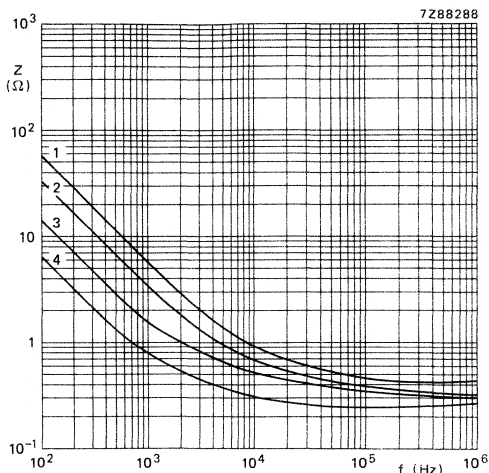
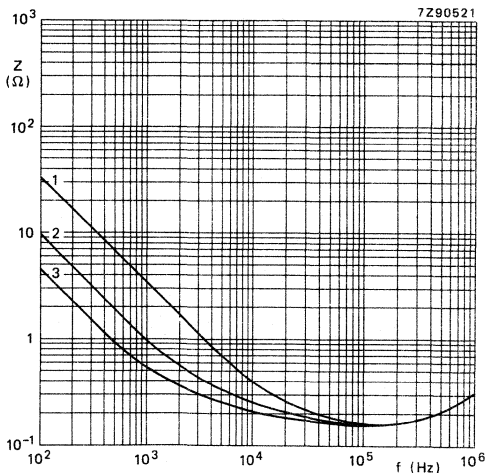


Fig. 27 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;

**case size 5:**

- curve 1 =  $47\text{ }\mu\text{F}$ ,  $63\text{ V}$ ;
- curve 2 =  $150\text{ }\mu\text{F}$ ,  $16\text{ V}$ ;
- curve 3 =  $330\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ .



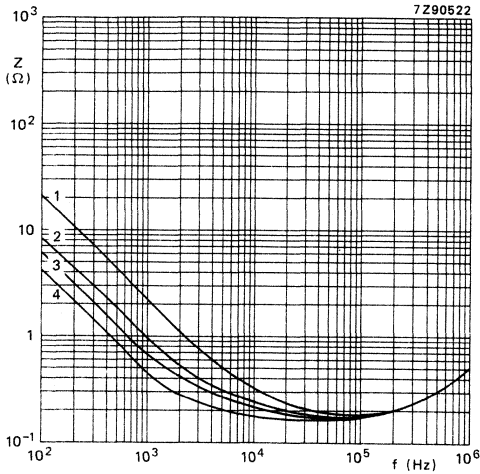


Fig. 28 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;  
**case size 6:**

- curve 1 =  $68\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $150\text{ }\mu\text{F}$ , 25 V;
- curve 3 =  $220\text{ }\mu\text{F}$ , 25 V;
- curve 4 =  $330\text{ }\mu\text{F}$ , 16 V.

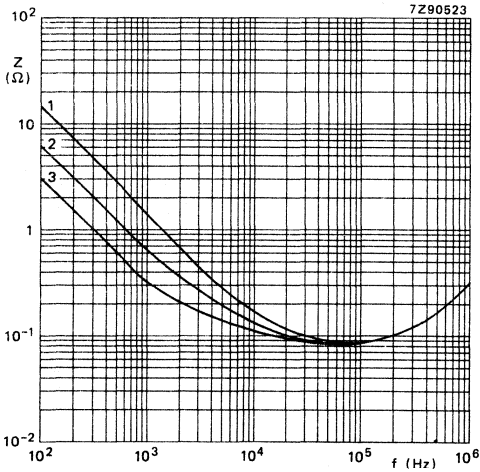


Fig. 29 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ;  
**case size 7:**

- curve 1 =  $100\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $220\text{ }\mu\text{F}$ , 40 V;
- curve 3 =  $470\text{ }\mu\text{F}$ , 16 V.



Fig. 30 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 00.

- curve 1 = 150  $\mu\text{F}$ , 63 V;
- curve 2 = 220  $\mu\text{F}$ , 40 V;
- curve 3 = 470  $\mu\text{F}$ , 25 V;
- curve 4 = 680  $\mu\text{F}$ , 16 V;
- curve 5 = 1000  $\mu\text{F}$ , 10 V;
- curve 6 = 1500  $\mu\text{F}$ , 6,3 V.

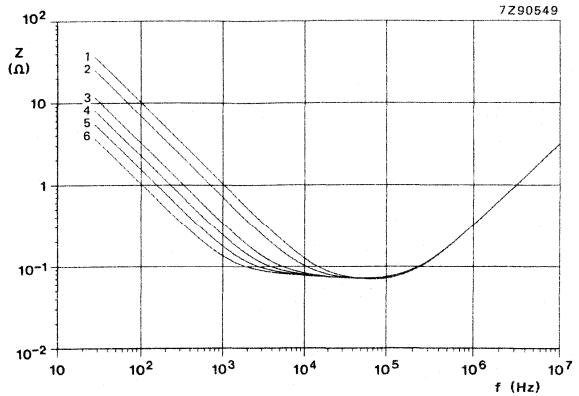


Fig. 31 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 01.

- curve 1 = 220  $\mu\text{F}$ , 63 V;
- curve 2 = 330  $\mu\text{F}$ , 40 V;
- curve 3 = 470  $\mu\text{F}$ , 40 V;
- curve 4 = 680  $\mu\text{F}$ , 25 V;
- curve 5 = 1000  $\mu\text{F}$ , 16 V;
- curve 6 = 1500  $\mu\text{F}$ , 10 V;
- curve 7 = 2200  $\mu\text{F}$ , 6,3 V.

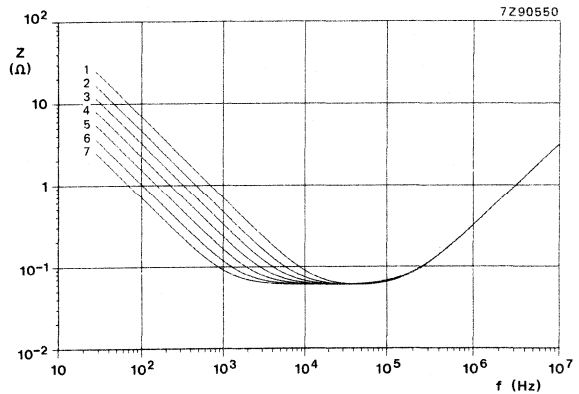
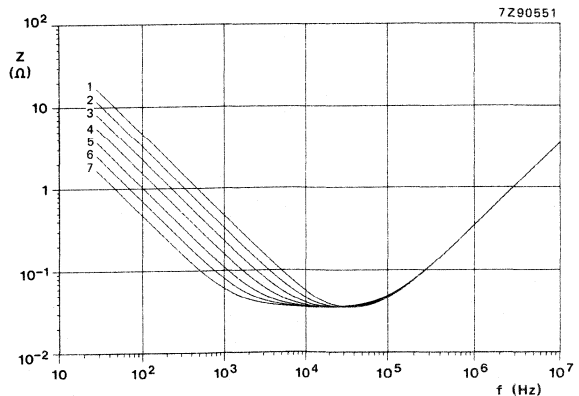


Fig. 32 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 02.

- curve 1 = 330  $\mu\text{F}$ , 63 V;
- curve 2 = 470  $\mu\text{F}$ , 63 V;
- curve 3 = 680  $\mu\text{F}$ , 40 V;
- curve 4 = 1000  $\mu\text{F}$ , 25 V;
- curve 5 = 1500  $\mu\text{F}$ , 16 V;
- curve 6 = 2200  $\mu\text{F}$ , 10 V;
- curve 7 = 3300  $\mu\text{F}$ , 6,3 V.



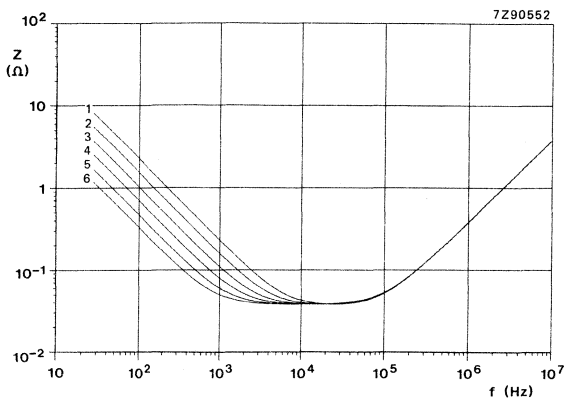


Fig. 33 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size **03**.

- curve 1 = 680  $\mu\text{F}$ , 63 V;
- curve 2 = 1000  $\mu\text{F}$ , 40 V;
- curve 3 = 1500  $\mu\text{F}$ , 25 V;
- curve 4 = 2200  $\mu\text{F}$ , 16 V;
- curve 5 = 3300  $\mu\text{F}$ , 10 V;
- curve 6 = 4700  $\mu\text{F}$ , 6,3 V.

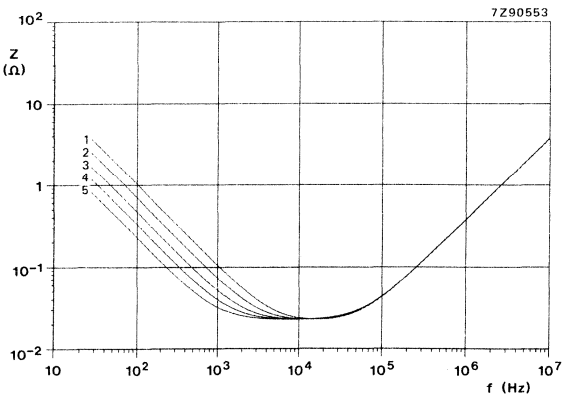


Fig. 34 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size **04**.

- curve 1 = 1500  $\mu\text{F}$ , 40 V;
- curve 2 = 2200  $\mu\text{F}$ , 25 V;
- curve 3 = 3300  $\mu\text{F}$ , 16 V;
- curve 4 = 4700  $\mu\text{F}$ , 10 V;
- curve 5 = 6800  $\mu\text{F}$ , 6,3 V.

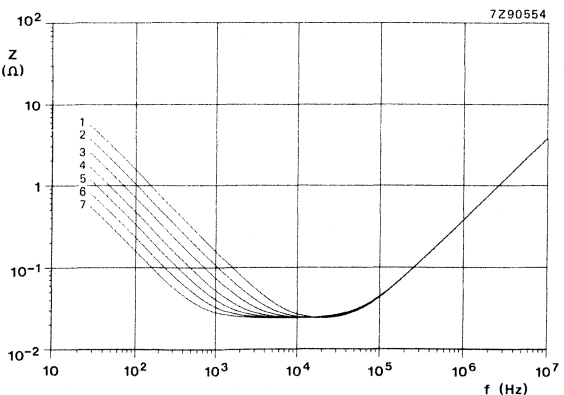


Fig. 35 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size **05**.

- curve 1 = 1000  $\mu\text{F}$ , 63 V;
- curve 2 = 1500  $\mu\text{F}$ , 63 V;
- curve 3 = 2200  $\mu\text{F}$ , 40 V;
- curve 4 = 3300  $\mu\text{F}$ , 25 and 40 V;
- curve 5 = 4700  $\mu\text{F}$ , 16 and 25 V;
- curve 6 = 6800  $\mu\text{F}$ , 10 and 16 V;
- curve 7 = 10 000  $\mu\text{F}$ , 6,3, 10 and 16 V.

Fig. 36 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 00.

- curve 1 =  $150\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $220\text{ }\mu\text{F}$ , 40 V;
- curve 3 =  $470\text{ }\mu\text{F}$ , 25 V;
- curve 4 =  $680\text{ }\mu\text{F}$ , 16 V;
- curve 5 =  $1000\text{ }\mu\text{F}$ , 10 V;
- curve 6 =  $1500\text{ }\mu\text{F}$ , 6,3 V.

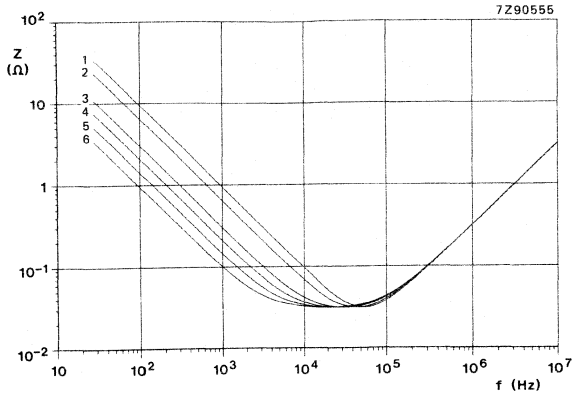


Fig. 37 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 01.

- curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $330\text{ }\mu\text{F}$ , 40 V;
- curve 3 =  $470\text{ }\mu\text{F}$ , 40 V;
- curve 4 =  $680\text{ }\mu\text{F}$ , 25 V;
- curve 5 =  $1000\text{ }\mu\text{F}$ , 16 V;
- curve 6 =  $1500\text{ }\mu\text{F}$ , 10 V;
- curve 7 =  $2200\text{ }\mu\text{F}$ , 6,3 V.



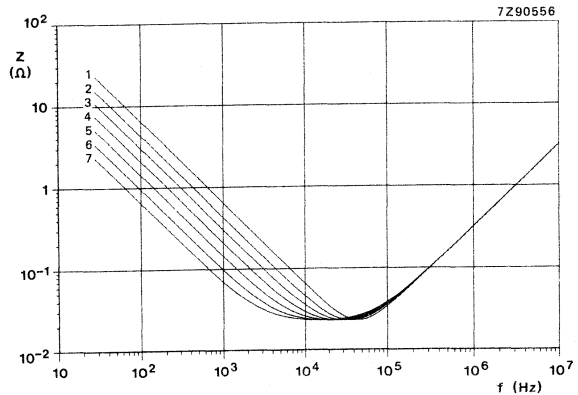



Fig. 38 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 02.

- curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;
- curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;
- curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V;
- curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V;
- curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V;
- curve 7 =  $3300\text{ }\mu\text{F}$ , 6,3 V.

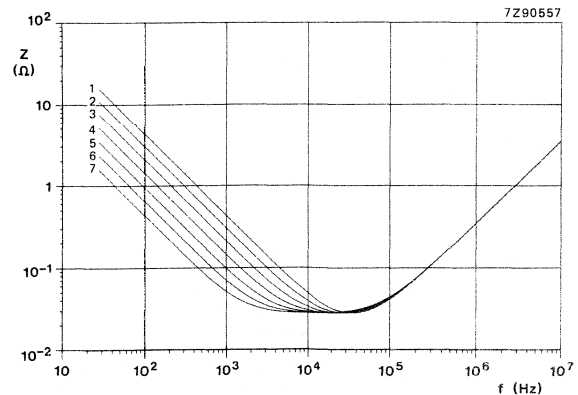


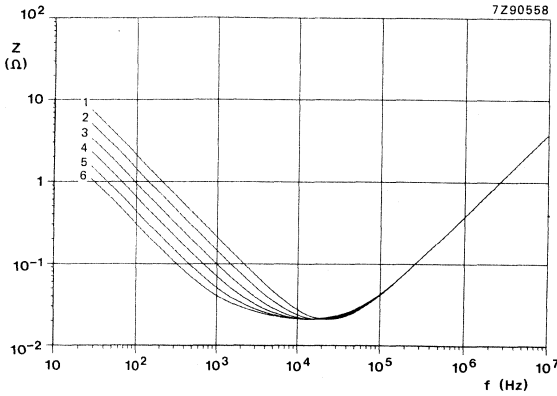

**Fig. 39** Typical impedance as a function of frequency at  $T_{amb} = 85^\circ C$ , case size **03**.  
 curve 1 =  $680 \mu F$ , 63 V;  
 curve 2 =  $1000 \mu F$ , 40 V;  
 curve 3 =  $1500 \mu F$ , 25 V;  
 curve 4 =  $2200 \mu F$ , 16 V;  
 curve 5 =  $3300 \mu F$ , 10 V;  
 curve 6 =  $4700 \mu F$ , 6,3 V.

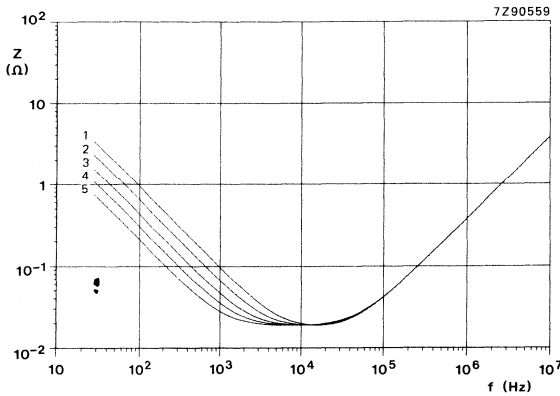

**Fig. 40** Typical impedance as a function of frequency at  $T_{amb} = 85^\circ C$ , case size **04**.  
 curve 1 =  $1500 \mu F$ , 40 V;  
 curve 2 =  $2200 \mu F$ , 25 V;  
 curve 3 =  $3300 \mu F$ , 16 V;  
 curve 4 =  $4700 \mu F$ , 10 V;  
 curve 5 =  $6800 \mu F$ , 6,3 V.

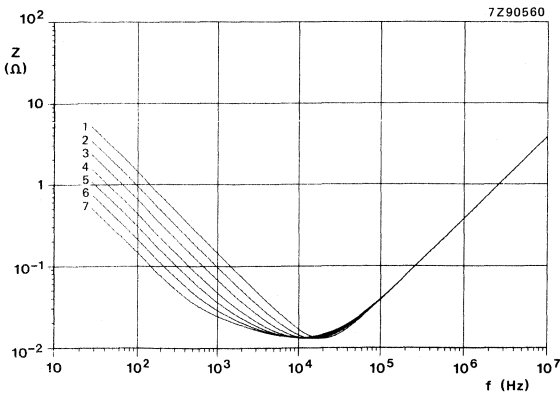

**Fig. 41** Typical impedance as a function of frequency at  $T_{amb} = 85^\circ C$ , case size **05**.  
 curve 1 =  $1000 \mu F$ , 63 V;  
 curve 2 =  $1500 \mu F$ , 63 V;  
 curve 3 =  $2200 \mu F$ , 40 V;  
 curve 4 =  $3300 \mu F$ , 25 and 40 V;  
 curve 5 =  $4700 \mu F$ , 16 and 25 V;  
 curve 6 =  $6800 \mu F$ , 10 and 16 V;  
 curve 7 =  $10\,000 \mu F$ , 6,3, 10 and 16 V.

Fig. 42 Typical impedance as a function of frequency at  $T_{amb} = -25^\circ\text{C}$ , case size 00.

curve 1 =  $150\ \mu\text{F}$ , 63 V;  
 curve 2 =  $220\ \mu\text{F}$ , 40 V;  
 curve 3 =  $470\ \mu\text{F}$ , 25 V;  
 curve 4 =  $680\ \mu\text{F}$ , 16 V;  
 curve 5 =  $1000\ \mu\text{F}$ , 10 V;  
 curve 6 =  $1500\ \mu\text{F}$ , 6,3 V.

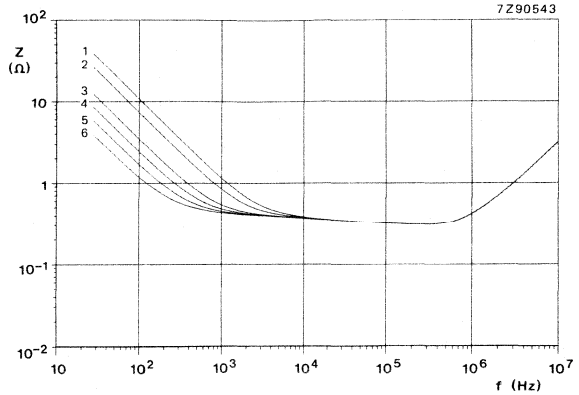


Fig. 43 Typical impedance as a function of frequency at  $T_{amb} = -25^\circ\text{C}$ , case size 01.

curve 1 =  $220\ \mu\text{F}$ , 63 V;  
 curve 2 =  $330\ \mu\text{F}$ , 40 V;  
 curve 3 =  $470\ \mu\text{F}$ , 40 V;  
 curve 4 =  $680\ \mu\text{F}$ , 25 V;  
 curve 5 =  $1000\ \mu\text{F}$ , 16 V;  
 curve 6 =  $1500\ \mu\text{F}$ , 10 V;  
 curve 7 =  $2200\ \mu\text{F}$ , 6,3 V.

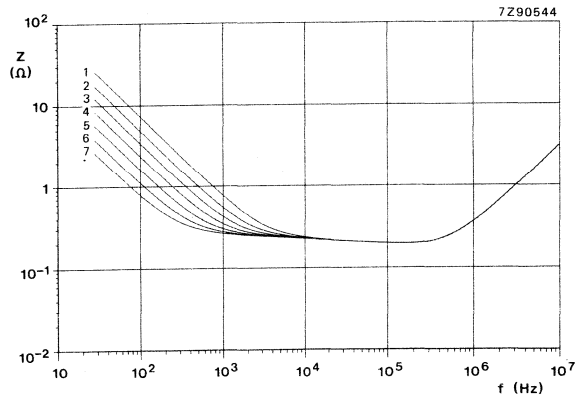
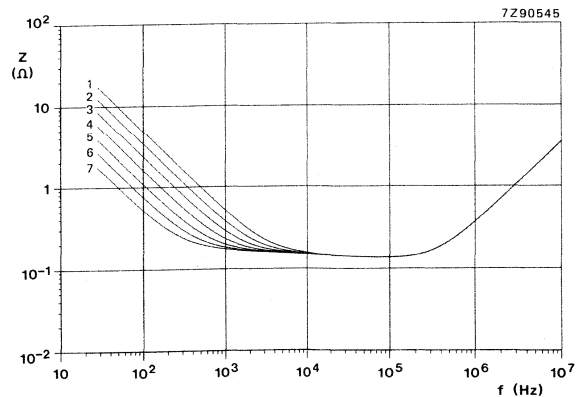


Fig. 44 Typical impedance as a function of frequency at  $T_{amb} = -25^\circ\text{C}$ , case size 02.

curve 1 =  $330\ \mu\text{F}$ , 63 V;  
 curve 2 =  $470\ \mu\text{F}$ , 63 V;  
 curve 3 =  $680\ \mu\text{F}$ , 40 V;  
 curve 4 =  $1000\ \mu\text{F}$ , 25 V;  
 curve 5 =  $1500\ \mu\text{F}$ , 16 V;  
 curve 6 =  $2200\ \mu\text{F}$ , 10 V;  
 curve 7 =  $3300\ \mu\text{F}$ , 6,3 V.



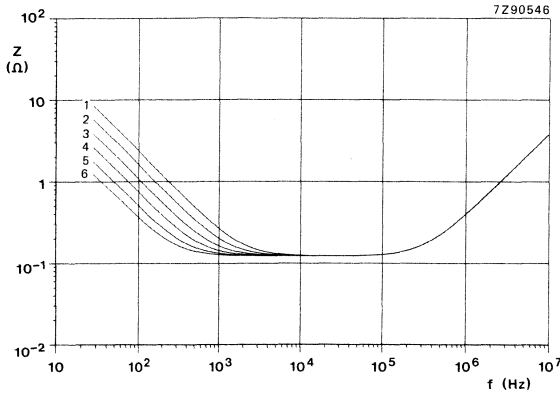


Fig. 45 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 03.

- curve 1 = 680  $\mu\text{F}$ , 63 V;
- curve 2 = 1000  $\mu\text{F}$ , 40 V;
- curve 3 = 1500  $\mu\text{F}$ , 25 V;
- curve 4 = 2200  $\mu\text{F}$ , 16 V;
- curve 5 = 3300  $\mu\text{F}$ , 10 V;
- curve 6 = 4700  $\mu\text{F}$ , 6,3 V.

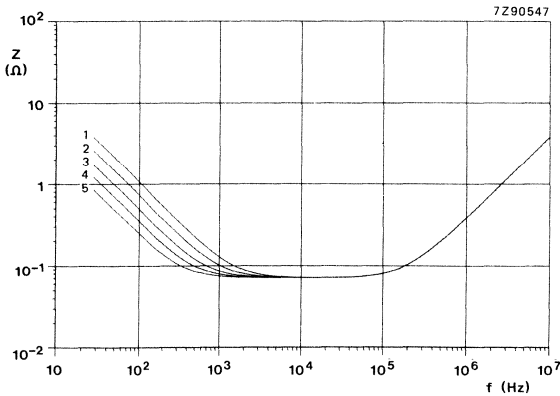


Fig. 46 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 04.

- curve 1 = 1500  $\mu\text{F}$ , 40 V;
- curve 2 = 2200  $\mu\text{F}$ , 25 V;
- curve 3 = 3300  $\mu\text{F}$ , 16 V;
- curve 4 = 4700  $\mu\text{F}$ , 10 V;
- curve 5 = 6800  $\mu\text{F}$ , 6,3 V.

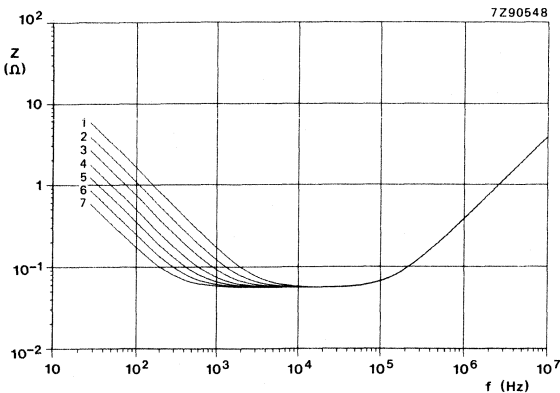


Fig. 47 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 05.

- curve 1 = 1000  $\mu\text{F}$ , 63 V;
- curve 2 = 1500  $\mu\text{F}$ , 63 V;
- curve 3 = 2200  $\mu\text{F}$ , 40 V;
- curve 4 = 3300  $\mu\text{F}$ , 25 and 40 V;
- curve 5 = 4700  $\mu\text{F}$ , 16 and 25 V;
- curve 6 = 6800  $\mu\text{F}$ , 10 and 16 V;
- curve 7 = 10 000  $\mu\text{F}$ , 6,3, 10 and 16 V.

Fig. 48 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 00.

curve 1 =  $150\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $220\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $470\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $680\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $1000\text{ }\mu\text{F}$ , 10 V;  
 curve 6 =  $1500\text{ }\mu\text{F}$ , 6,3 V.

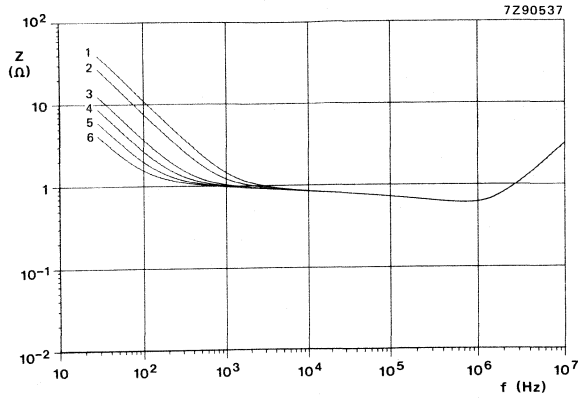


Fig. 49 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 01.

curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $330\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $470\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $680\text{ }\mu\text{F}$ , 25 V;  
 curve 5 =  $1000\text{ }\mu\text{F}$ , 16 V;  
 curve 6 =  $1500\text{ }\mu\text{F}$ , 10 V;  
 curve 7 =  $2200\text{ }\mu\text{F}$ , 6,3 V.

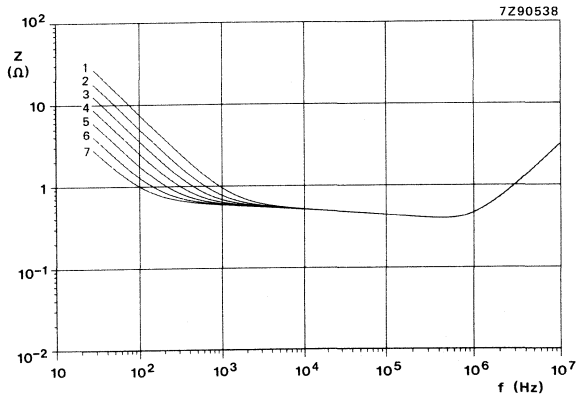
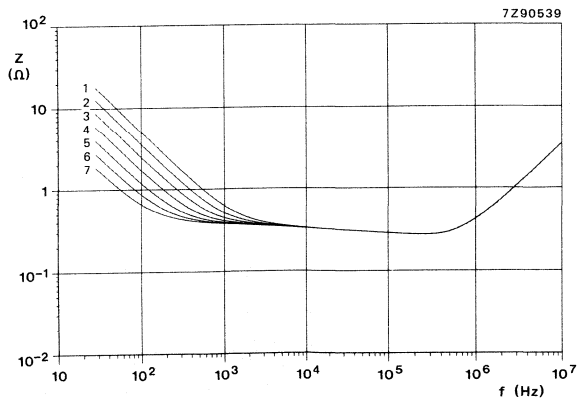


Fig. 50 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 02.

curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V;  
 curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V;  
 curve 7 =  $3300\text{ }\mu\text{F}$ , 6,3 V.



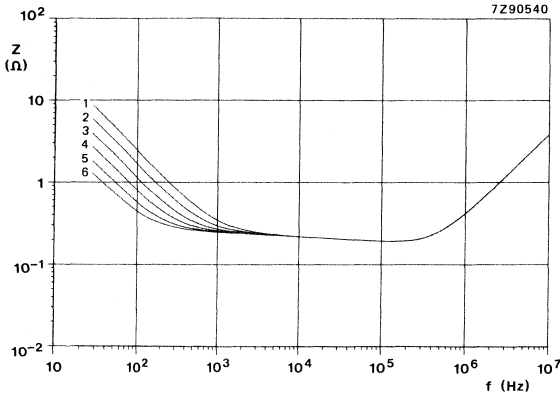


Fig. 51 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size **03**.

- curve 1 = 680  $\mu\text{F}$ , 63 V;
- curve 2 = 1000  $\mu\text{F}$ , 40 V;
- curve 3 = 1500  $\mu\text{F}$ , 25 V;
- curve 4 = 2200  $\mu\text{F}$ , 16 V;
- curve 5 = 3300  $\mu\text{F}$ , 10 V;
- curve 6 = 4700  $\mu\text{F}$ , 6,3 V.

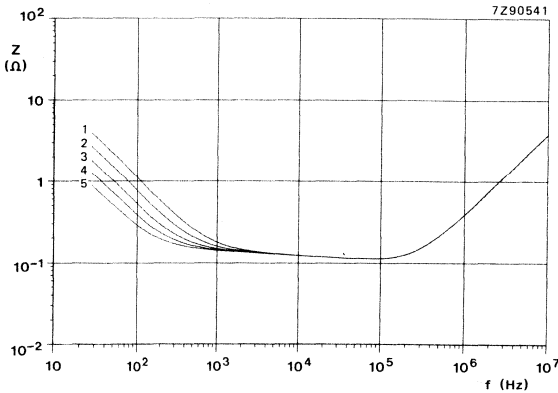


Fig. 52 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size **04**.

- curve 1 = 1500  $\mu\text{F}$ , 40 V;
- curve 2 = 2200  $\mu\text{F}$ , 25 V;
- curve 3 = 3300  $\mu\text{F}$ , 16 V;
- curve 4 = 4700  $\mu\text{F}$ , 10 V;
- curve 5 = 6800  $\mu\text{F}$ , 6,3 V.

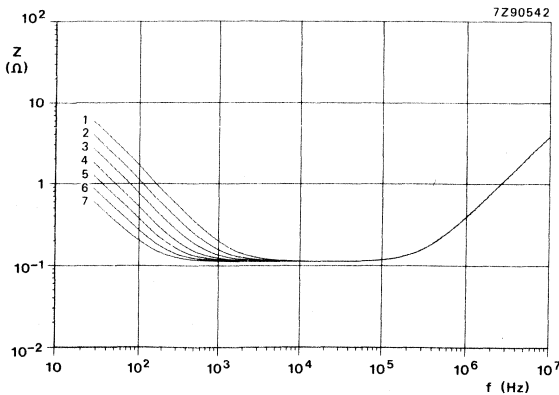


Fig. 53 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size **05**.

- curve 1 = 1000  $\mu\text{F}$ , 63 V;
- curve 2 = 1500  $\mu\text{F}$ , 63 V;
- curve 3 = 2200  $\mu\text{F}$ , 40 V;
- curve 4 = 3300  $\mu\text{F}$ , 25 and 40 V;
- curve 5 = 4700  $\mu\text{F}$ , 16 and 25 V;
- curve 6 = 6800  $\mu\text{F}$ , 10 and 16 V;
- curve 7 = 10 000  $\mu\text{F}$ , 6,3, 10 and 16 V.



Fig. 54 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 00.

curve 1 =  $150\ \mu\text{F}$ , 63 V;  
 curve 2 =  $220\ \mu\text{F}$ , 40 V;  
 curve 3 =  $470\ \mu\text{F}$ , 25 V;  
 curve 4 =  $680\ \mu\text{F}$ , 16 V;  
 curve 5 =  $1000\ \mu\text{F}$ , 10 V;  
 curve 6 =  $1500\ \mu\text{F}$ , 6,3 V.

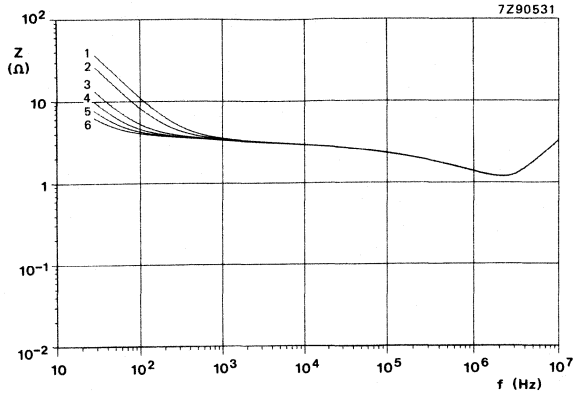


Fig. 55 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 01.

curve 1 =  $220\ \mu\text{F}$ , 63 V;  
 curve 2 =  $330\ \mu\text{F}$ , 40 V;  
 curve 3 =  $470\ \mu\text{F}$ , 40 V;  
 curve 4 =  $680\ \mu\text{F}$ , 25 V;  
 curve 5 =  $1000\ \mu\text{F}$ , 16 V;  
 curve 6 =  $1500\ \mu\text{F}$ , 10 V;  
 curve 7 =  $2200\ \mu\text{F}$ , 6,3 V.

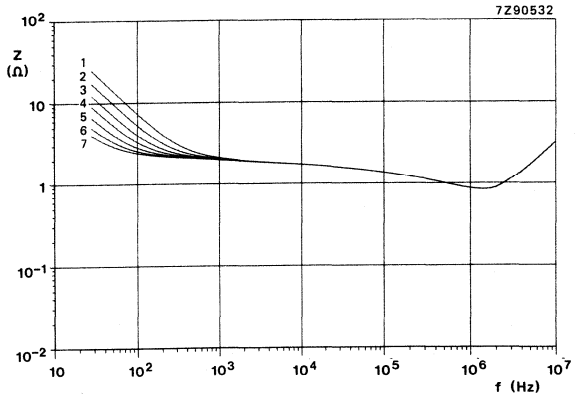
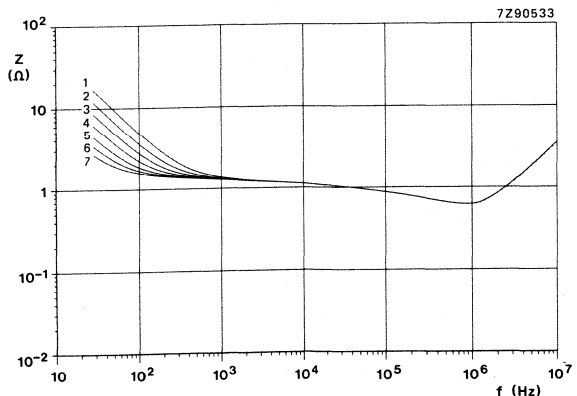


Fig. 56 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 02.

curve 1 =  $330\ \mu\text{F}$ , 63 V;  
 curve 2 =  $470\ \mu\text{F}$ , 63 V;  
 curve 3 =  $680\ \mu\text{F}$ , 40 V;  
 curve 4 =  $1000\ \mu\text{F}$ , 25 V;  
 curve 5 =  $1500\ \mu\text{F}$ , 16 V;  
 curve 6 =  $2200\ \mu\text{F}$ , 10 V;  
 curve 7 =  $3300\ \mu\text{F}$ , 6,3 V.



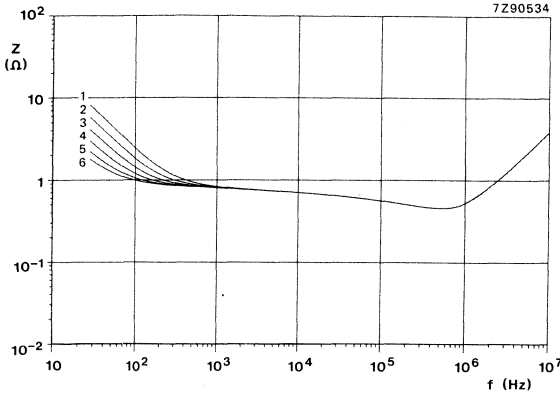


Fig. 57 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 03.

- curve 1 = 680  $\mu\text{F}$ , 63 V;
- curve 2 = 1000  $\mu\text{F}$ , 40 V;
- curve 3 = 1500  $\mu\text{F}$ , 25 V;
- curve 4 = 2200  $\mu\text{F}$ , 16 V;
- curve 5 = 3300  $\mu\text{F}$ , 10 V;
- curve 6 = 4700  $\mu\text{F}$ , 6,3 V.

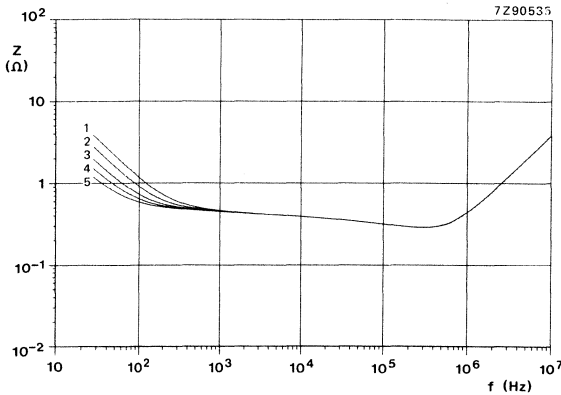


Fig. 58 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 04.

- curve 1 = 1500  $\mu\text{F}$ , 40 V;
- curve 2 = 2200  $\mu\text{F}$ , 25 V;
- curve 3 = 3300  $\mu\text{F}$ , 16 V;
- curve 4 = 4700  $\mu\text{F}$ , 10 V;
- curve 5 = 6800  $\mu\text{F}$ , 6,3 V.

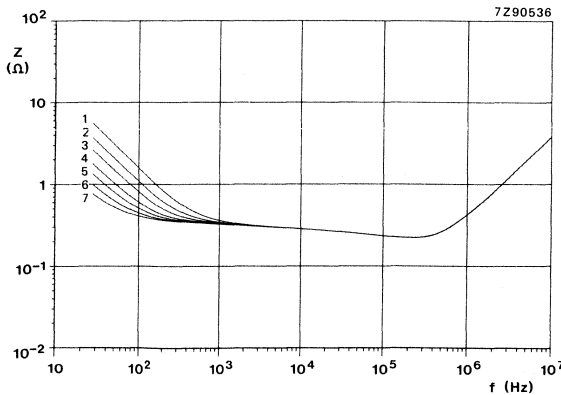


Fig. 59 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 05.

- curve 1 = 1000  $\mu\text{F}$ , 63 V;
- curve 2 = 1500  $\mu\text{F}$ , 63 V;
- curve 3 = 2200  $\mu\text{F}$ , 40 V;
- curve 4 = 3300  $\mu\text{F}$ , 25 and 40 V;
- curve 5 = 4700  $\mu\text{F}$ , 16 and 25 V;
- curve 6 = 6800  $\mu\text{F}$ , 10 and 16 V;
- curve 7 = 10 000  $\mu\text{F}$ , 6,3, 10 and 16 V.

**Equivalent series inductance (ESL)**

|                          |            |
|--------------------------|------------|
| Case sizes 3 and 4       | typ. 30 nH |
| Case size 5a             | typ. 85 nH |
| Case size 5              | typ. 50 nH |
| Case sizes 6 and 7       | typ. 65 nH |
| Case sizes 00 and 01     | typ. 50 nH |
| Case size 02             | typ. 55 nH |
| Case sizes 03, 04 and 05 | typ. 60 nH |

**OPERATIONAL DATA**

|   |                          |                          |
|---|--------------------------|--------------------------|
| Category temperature range                                    | -55 to +85 °C            |                          |
| Typical life time<br>case sizes 3 to 7<br>case sizes 00 to 05 | $T_{amb} = 85\text{ °C}$ | $T_{amb} = 40\text{ °C}$ |
|   | 3000 h                   | 70 000 h                 |
|   | 5000 h                   | 100 000 h                |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$                | 500 h                    |                          |

**PACKING**

All capacitors are supplied in boxes, except case sizes 3 to 7 of style 1, which are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 4.

**Table 4**

| case size | number of capacitors |                    |                           |
|-----------|----------------------|--------------------|---------------------------|
|           | style 1<br>per reel  | style 1<br>per box | styles 2 and 3<br>per box |
| 3         | 1000                 | 1000               | 1000                      |
| 5a        | 500                  | 500                | 1000                      |
| 4         | 1000                 | 1000               | 1000                      |
| 5         | 500                  | 500                | 1000                      |
| 6         | 500                  | 500                | 1000                      |
| 7         | 500                  | 500                | 500                       |
| 00        |                      | 200                | 200                       |
| 01        |                      | 200                | 200                       |
| 02        |                      | 200                | 200                       |
| 03        |                      | 200                | 200                       |
| 04        |                      | 100                | 100                       |
| 05        |                      | 100                | 100                       |

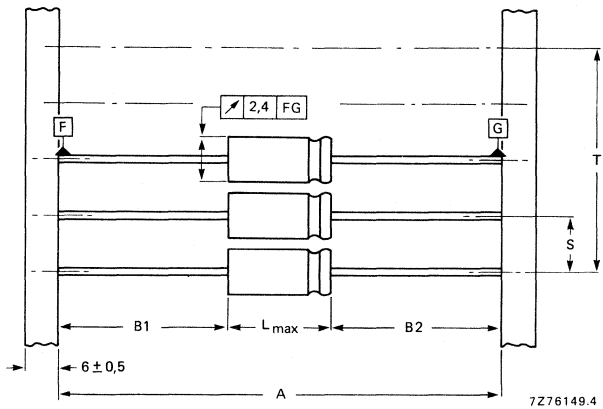


Fig. 60 Style 1 capacitors (case sizes 3 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 5 for dimensions A, S, T and  $L_{max}$ .  $|B1 - B2| = \text{max. } 1,4 \text{ mm}$ .

**Table 5**  
Dimensions in mm

| case size | A              | S             | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|----------------|---------------|--------------------------------|------------------|-----------|
|           |                |               | $n < 50$                       | $50 < n < 100$   |           |
| 3         | $63,5 \pm 1,5$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 10,5      |
| 5a        | $63,5 \pm 1,5$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 11,5      |
| 4         | $73 \pm 1,6$   | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 5         | $73 \pm 1,6$   | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 6         | $73 \pm 1,6$   | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 18,5      |
| 7         | $73 \pm 1,6$   | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 25,0      |

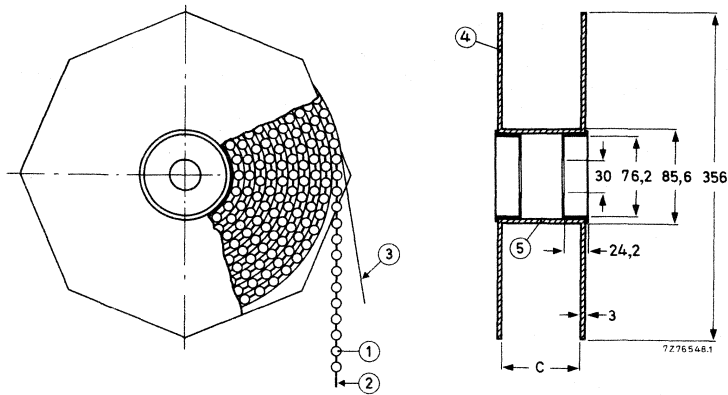


Fig. 61 Style 1 capacitors (case sizes 3 to 7) on bandoliers on reel; dimension C is 83,5 mm for case sizes 3 and 5a, and 88,5 mm for case sizes 4, 5, 6 and 7; the overall width of the reel is 94,5 mm and 99,5 mm respectively.

- |               |              |
|---------------|--------------|
| 1 = capacitor | 4 = flange   |
| 2 = bandolier | 5 = cylinder |
| 3 = paper     |              |

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.


After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

**Note:** Capacitors 2222 014 are miniature and small types, long-life grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads and single ended
- Very high CU-product per unit volume
- Long life
- General and industrial applications

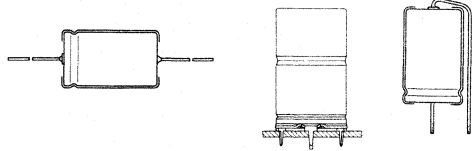

### QUICK REFERENCE DATA

|   |  |
|---|--|
| Nominal capacitance range<br>(E6 series):                       | 0,22 to 15 000 $\mu\text{F}$                 |
| Tolerance on nominal capacitance:                               | $\pm 20\%$                                   |
| Rated voltage range, $U_R$<br>(R5 series):                      | 10 to 100 V                                  |
| Category temperature range:                                     | $-55$ to $+85$ $^{\circ}\text{C}$            |
| Endurance test at $85$ $^{\circ}\text{C}$<br>case sizes 2 to 7: | 1000 h*                                      |
| case sizes 00 to 05:  | 2000 h                                       |
| Shelf life at 0 V, $85$ $^{\circ}\text{C}$ :                    | 500 h  |
| Basic specifications<br>case sizes 2 to 7:                      | IEC 384-4, G.P. grade,<br>DIN 41332, type II |
| case sizes 00 to 05:  | IEC 384-4, L.L. grade,<br>DIN 41316          |
| Climatic category<br>IEC 68:                                    | 55/085/56                                    |
| DIN 40040:  | FPP  |

Selection chart for  $C_{nom}-U_R$  and relevant case sizes

| $C_{nom}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |      |      |      |
|----------------------------|-----------|------|------|------|------|------|
|                            | 10        | 16   | 25   | 40   | 63   | 100  |
| 0,22                       |           |      |      |      | 2    |      |
| 0,33                       |           |      |      |      | 2    |      |
| 0,47                       |           |      |      |      | 2    |      |
| 0,68                       |           |      |      |      | 2    |      |
| 1                          |           |      |      |      | 2    | 2    |
| 1,5                        |           |      |      |      | 2    |      |
| 2,2                        |           |      |      |      | 2    | 2    |
| 3,3                        |           |      |      |      | 2    |      |
| 4,7                        |           |      |      |      | 2    | 2    |
| 6,8                        |           |      |      |      | 2    | 2    |
| 10                         |           |      |      |      | 2    | 3    |
| 15                         |           |      |      |      | 2    | 4/5a |
| 22                         |           |      |      | 2    | 3    | 4/5a |
| 33                         |           |      |      |      | 3    | 4    |
| 47                         |           |      | 2    | 3    | 4/5a | 5    |
| 68                         |           | 2    |      |      | 4/5a | 6    |
| 100                        | 2         |      | 3    | 4/5a | 5    | 7/00 |
| 150                        |           | 3    | 4/5a | 5    | 6    | 01   |
| 220                        | 3         | 5a   | 4    | 6    | 7/00 | 01   |
| 330                        | 5a        | 4    | 5    | 7    | 01   | 02   |
| 470                        | 4         | 5    | 6    | 00   | 01   | 03   |
| 680                        | 5         | 6    | 7/00 | 01   | 02   | 04   |
| 1000                       | 6         | 7/00 | 01   | 01   | 03   | 05   |
| 1500                       | 7/00      | 01   | 01   | 02   | 04   |      |
| 2200                       | 01        | 01   | 02   | 03   | 05   |      |
| 3300                       | 01        | 02   | 03   | 04   |      |      |
| 4700                       | 02        | 03   | 04   | 05   |      |      |
| 6800                       | 03        | 04   | 05   |      |      |      |
| 10 000                     | 04        | 05   |      |      |      |      |
| 15 000                     | 05        |      |      |      |      |      |

| case size | nominal dimensions (mm)      |           |
|-----------|------------------------------|-----------|
| 2         | $\varnothing 4,5 \times 10$  | miniature |
| 3         | $\varnothing 6 \times 10$    |           |
| 5a        | $\varnothing 8 \times 11$    |           |
| 4         | $\varnothing 6,5 \times 18$  |           |
| 5         | $\varnothing 8 \times 18$    |           |
| 6         | $\varnothing 10 \times 18$   |           |
| 7         | $\varnothing 10 \times 25$   |           |
| 00        | $\varnothing 10 \times 30$   | small     |
| 01        | $\varnothing 12,5 \times 30$ |           |
| 02        | $\varnothing 15 \times 30$   |           |
| 03        | $\varnothing 18 \times 30$   |           |
| 04        | $\varnothing 18 \times 40$   |           |
| 05        | $\varnothing 21 \times 40$   |           |

\* 2000 h under consideration.

**APPLICATION**

These capacitors have extremely high CU-product per unit volume, which render them very suitable for applications, where high requirements are imposed on size and mass, e.g. portable and mobile equipment. They are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and video circuits, and in other applications such as measuring, regulating, timing and delay circuits. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case.

The capacitors are available in 3 styles, all with soldered-copper terminations.

Style 1: axial leads; case insulated with a blue plastic sleeve; all case sizes; case sizes 2 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 02 to 05.

Style 3: single ended; case insulated with a blue plastic sleeve; case sizes 2 to 7 and 00 to 02.

**MECHANICAL DATA**

Dimensions in mm

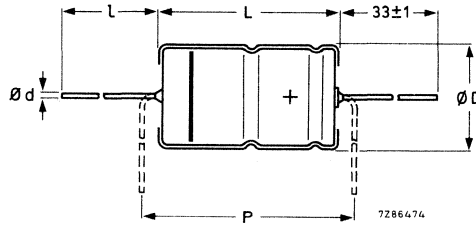


Fig. 1 Style 1; see Table 1a for dimensions d, D, L, I and P.

**Table 1a**

| case size | d   | l      | style 1          |                  |                  |                  |                  | mass approx. g |
|-----------|-----|--------|------------------|------------------|------------------|------------------|------------------|----------------|
|           |     |        | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| 2         | 0,6 | *      | 4,5              | 10,0             | 5,0              | 10,5             | 15               | 0,50           |
| 3         | 0,6 | *      | 6,0              | 10,0             | 6,3              | 10,5             | 15               | 0,70           |
| 5a        | 0,6 | *      | 8,0              | 11,0             | 8,5              | 11,5             | 15               | 1,1            |
| 4         | 0,8 | *      | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | 0,8 | *      | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | 0,8 | *      | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | 0,8 | *      | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 0,8 | 55 ± 1 | 10,0             | 30,0             | 10,5             | 30,5             | 35               | 4              |
| 01        | 0,8 | 55 ± 1 | 12,5             | 30,0             | 13,0             | 30,5             | 35               | 6,3            |
| 02        | 0,8 | 55 ± 1 | 15,0             | 30,0             | 15,5             | 30,5             | 35               | 8,2            |
| 03        | 0,8 | 55 ± 1 | 18,0             | 30,0             | 18,5             | 30,5             | 35               | 10,9           |
| 04        | 0,8 | 34 ± 1 | 18,0             | 40,0             | 18,5             | 41,5             | 45               | 14             |
| 05        | 0,8 | 34 ± 1 | 21,0             | 40,0             | 21,5             | 41,5             | 45               | 19             |

\* Case sizes 2 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).



Table 1b

| case size | style 2        |                |      |                   |            |        | mass approx. g |
|-----------|----------------|----------------|------|-------------------|------------|--------|----------------|
|           | d <sub>1</sub> | d <sub>2</sub> | D1   | D2 <sub>max</sub> | D3         | L      |                |
| 02        | 0,8            | 1 + 0,1        | 15,0 | 17,5              | 16,5 ± 0,2 | 31 ± 1 | 8,6            |
| 03        | 0,8            | 1 + 0,1        | 18,0 | 19,5              | 18,5 ± 0,2 | 31 ± 1 | 11,5           |
| 04        | 1,0            | 1,3 + 0,1      | 18,0 | 19,5              | 18,5 ± 0,2 | 42 ± 1 | 14,5           |
| 05        | 1,0            | 1,3 + 0,1      | 21,0 | 22,5              | 21,5 ± 0,2 | 42 ± 1 | 19,7           |

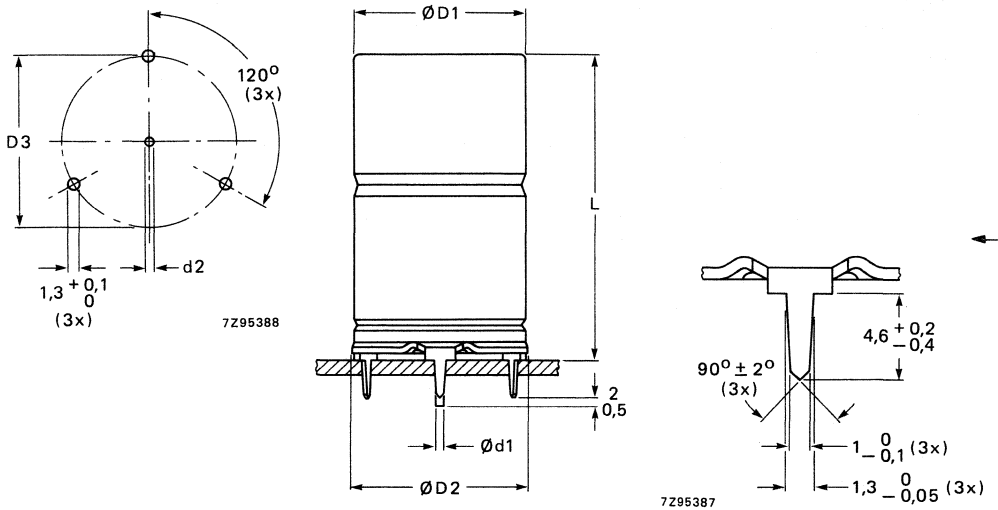


Fig. 2 Style 2; see Table 1b for dimensions d, D1, D2, D3 and L.

Table 1c

| case size | style 3 |                  |                  |           | mass approx. g |
|-----------|---------|------------------|------------------|-----------|----------------|
|           | d       | D <sub>max</sub> | L <sub>max</sub> | P         |                |
| 2         | 0,6     | 5,0              | 12,5             | 2,5- 5    | 0,40           |
| 3         | 0,6     | 6,3              | 12,5             | 3,5- 7,5  | 0,55           |
| 5a        | 0,6     | 8,5              | 13,0             | 5 -10     | 1,0            |
| 4         | 0,8     | 6,9              | 21,5             | 5 -10     | 1,2            |
| 5         | 0,8     | 8,5              | 21,5             | 5 -10     | 1,6            |
| 6         | 0,8     | 10,5             | 21,5             | 7,5-12,5  | 2,3            |
| 7         | 0,8     | 10,5             | 28,0             | 7,5-12,5  | 3,1            |
| 00        | 0,8     | 10,5             | 34,0             | 7,5-12,5  | 3,8            |
| 01        | 0,8     | 13,0             | 34,0             | 7,5-12,5  | 6,1            |
| 02        | 0,8     | 15,5             | 34,0             | 10,0-15,0 | 8,0            |

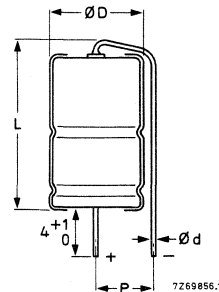


Fig. 3 Style 3; see Table 1c for dimensions d, D, L and P.

**Marking**

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal (not for case sizes 2, 3 and 5a).

**Mounting**

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameters are shown in Table 1c.

**Table 1d**

| style   | lead/pin diameter | required hole diameter |
|---------|-------------------|------------------------|
| 1 and 3 | 0,6 mm lead       | 0,8 + 0,1 mm           |
|         | 0,8 mm lead       | 1,0 + 0,1 mm           |
| 2       | 0,8 mm anode pin  | 1 + 0,1 mm             |
|         | 1,0 mm anode pin  | 1,3 + 0,1 mm           |
|         | cathode pins      | 1,3 + 0,1 mm           |

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%. (See also the relevant paragraphs).

| U <sub>R</sub> | nom. cap.<br>μF | max. r.m.s. ripple current<br>at T <sub>amb</sub> = 85 °C<br>mA | max. d.c. leakage current at U <sub>R</sub><br>after 1 min<br>μA | max. tan δ | max. ESR<br>Ω | max. impedance<br>Ω |          | case size | catalogue number*<br>2222 021<br>followed by |
|----------------|-----------------|---|--|------------|---------------|---------------------|----------|-----------|--|
|                |                 |   |  |            |               | at 10 kHz           | at 1 kHz |           |  |
| 10             | 100             | 65  | 10   | 0,20       | 3,2           | 2,0                 |          | 2         | . 4101                                       |
|                | 220             | 110   | 17   | 0,20       | 1,5           | 0,91                |          | 3         | . 4221                                       |
|                | 330             | 165   | 24   | 0,20       | 1,0           | 0,61                |          | 5a        | . 4331                                       |
|                | 470             | 210   | 32   | 0,20       | 0,68          | 0,43                |          | 4         | . 4471                                       |
|                | 680             | 285   | 45   | 0,20       | 0,47          | 0,29                |          | 5         | . 4681                                       |
|                | 1000            | 400   | 64   | 0,20       | 0,32          | 0,20                |          | 6         | . 4102                                       |
|                | 1500            | 530   | 94   | 0,23       | 0,25          | 0,18                |          | 7         | **   |
|                | 1500            | 570   | 94   | 0,23       | 0,245         |                     | 0,30     | 00        | . 4152                                       |
|                | 2200            | 740   | 136  | 0,25       | 0,177         |                     | 0,20     | 01        | . 4222                                       |
|                | 3300            | 920   | 202  | 0,27       | 0,128         |                     | 0,14     | 01        | . 4332                                       |
|                | 4700            | 1150  | 288  | 0,29       | 0,100         |                     | 0,096    | 02        | . 4472                                       |
|                | 6800            | 1480  | 412  | 0,34       | 0,079         |                     | 0,066    | 03        | . 4682                                       |
|                | 10000           | 1840  | 604  | 0,40       | 0,064         |                     | 0,045    | 04        | . 4103                                       |
|                | 15000           | 2200  | 904  | 0,50       | 0,054         |                     | 0,040    | 05        | . 4153                                       |
|                | 16              | 68  | 60   | 11         | 0,16          | 3,8                 | 2,4      |           | 2  |
| 150            |                 | 100   | 18   | 0,16       | 1,7           | 1,1                 |          | 3         | . 5151                                       |
| 220            |                 | 150   | 25   | 0,16       | 1,2           | 0,73                |          | 5a        | . 5221                                       |
| 330            |                 | 200   | 36   | 0,16       | 0,77          | 0,48                |          | 4         | . 5331                                       |
| 470            |                 | 265   | 49   | 0,16       | 0,55          | 0,34                |          | 5         | . 5471                                       |
| 680            |                 | 365   | 69   | 0,16       | 0,38          | 0,24                |          | 6         | . 5681                                       |
| 1000           |                 | 510   | 100  | 0,16       | 0,26          | 0,16                |          | 7         | **   |
| 1000           |                 | 530   | 100  | 0,16       | 0,260         | 0,175               |          | 00        | . 5102                                       |
| 1500           |                 | 680   | 148  | 0,19       | 0,205         |                     | 0,267    | 01        | . 5152                                       |
| 2200           |                 | 880   | 216  | 0,21       | 0,150         |                     | 0,182    | 01        | . 5222                                       |
| 3300           |                 | 1120  | 321  | 0,23       | 0,111         |                     | 0,121    | 02        | . 5332                                       |
| 4700           |                 | 1380  | 455  | 0,25       | 0,087         |                     | 0,085    | 03        | . 5472                                       |
| 6800           |                 | 1760  | 656  | 0,30       | 0,070         |                     | 0,060    | 04        | . 5682                                       |
| 10000          |                 | 2100  | 964  | 0,36       | 0,058         |                     | 0,042    | 05        | . 5103                                       |

\* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 2, 3 and 4)

3 for style 1 on bandoliers in box (preferred for case sizes 5a, 5, 6 and 7) } case sizes 2 to 7

4 for style 2; case sizes 02 to 05;

8 for style 3; case sizes 2 to 02.

\*\* See Table 3.

Table 2 (continued)

| $U_R$ | nom. cap. | max. r.m.s. ripple current at $T_{amb} = 85^\circ C$ | max. d.c. leakage current at $U_R$ after 1 min | max. $\tan \delta$ | max. ESR | max. impedance $\Omega$ |          | case size | catalogue number*<br>2222 021 followed by |
|-------|-----------|--|--|--------------------|----------|-------------------------|----------|-----------|---|
|       | $\mu F$   | mA   | $\mu A$  |                    | $\Omega$ | at 10 kHz               | at 1 kHz |           |   |
| 25    | 47        | 50   | 11   | 0,14               | 4,8      | 2,6                     |          | 2         | . 6479                                    |
|       | 100       | 90   | 19   | 0,14               | 2,3      | 1,2                     |          | 3         | . 6101                                    |
|       | 150       | 135  | 27   | 0,14               | 1,5      | 0,80                    |          | 5a        | **  |
|       | 150       | 145  | 27   | 0,14               | 1,5      | 0,80                    |          | 4         | . 6151                                    |
|       | 220       | 170  | 37   | 0,14               | 1,0      | 0,55                    |          | 4         | . 6221                                    |
|       | 330       | 240  | 54   | 0,14               | 0,68     | 0,36                    |          | 5         | . 6331                                    |
|       | 470       | 325  | 75   | 0,14               | 0,48     | 0,26                    |          | 6         | . 6471                                    |
|       | 680       | 450  | 106  | 0,14               | 0,33     | 0,18                    |          | 7         | **  |
|       | 680       | 480  | 106  | 0,14               | 0,323    | 0,175                   |          | 00        | . 6681                                    |
|       | 1000      | 630  | 154  | 0,14               | 0,220    | 0,095                   |          | 01        | . 6102                                    |
|       | 1500      | 780  | 229  | 0,17               | 0,179    |                         | 0,20     | 01        | . 6152                                    |
|       | 2200      | 1020   | 334  | 0,19               | 0,132    |                         | 0,136    | 02        | . 6222                                    |
|       | 3300      | 1240   | 499  | 0,21               | 0,099    |                         | 0,091    | 03        | . 6332                                    |
|       | 4700      | 1650   | 709  | 0,23               | 0,079    |                         | 0,064    | 04        | . 6472                                    |
|       | 6800      | 2000   | 1024   | 0,28               | 0,064    |                         | 0,044    | 05        | . 6682                                    |
| 40    | 22        | 40   | 9  | 0,11               | 8,0      | 3,2                     |          | 2         | . 7229                                    |
|       | 47        | 70   | 15   | 0,11               | 3,8      | 1,5                     |          | 3         | . 7479                                    |
|       | 100       | 120  | 28   | 0,11               | 1,8      | 0,70                    |          | 5a        | **  |
|       | 100       | 130  | 28   | 0,11               | 1,8      | 0,70                    |          | 4         | . 7101                                    |
|       | 150       | 180  | 40   | 0,11               | 1,1      | 0,47                    |          | 5         | . 7151                                    |
|       | 220       | 250  | 57   | 0,11               | 0,8      | 0,32                    |          | 6         | . 7221                                    |
|       | 330       | 350  | 83   | 0,11               | 0,53     | 0,21                    |          | 7         | . 7331                                    |
|       | 470       | 440  | 117  | 0,12               | 0,404    | 0,175                   |          | 00        | . 7471                                    |
|       | 680       | 580  | 167  | 0,12               | 0,279    | 0,095                   |          | 01        | . 7681                                    |
|       | 1000      | 730  | 244  | 0,12               | 0,190    | 0,095                   |          | 01        | . 7102                                    |
|       | 1500      | 815  | 364  | 0,15               | 0,159    |                         | 0,160    | 02        | . 7152                                    |
|       | 2200      | 1170   | 532  | 0,17               | 0,118    |                         | 0,110    | 03        | . 7222                                    |
|       | 3300      | 1500   | 796  | 0,19               | 0,090    |                         | 0,073    | 04        | . 7332                                    |
|       | 4700      | 1815   | 1132   | 0,21               | 0,072    |                         | 0,051    | 05        | . 7472                                    |

\* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 2, 3 and 4)

3 for style 1 on bandoliers in box (preferred for case sizes 5a, 5, 6 and 7) } case sizes 2 to 7

4 for style 2; case sizes 02 to 05;

8 for style 3; case sizes 2 to 02.

\*\* See Table 3.

Table 2 (continued)

| U <sub>R</sub><br>V | nom. cap.<br>μF | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C<br>mA | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>Ω | max. impedance Ω |          | case size | catalogue number*<br>2222 021 followed by |
|---------------------|-----------------|--|---|------------|---------------|------------------|----------|-----------|---|
|                     |                 |  |   |            |               | at 10 kHz        | at 1 kHz |           |   |
| 63                  | 0,22            | 5  | 4,1   | 0,09       | 650           | 250              |          | 2         | . 8227                                    |
|                     | 0,33            | 5  | 4,1   | 0,09       | 440           | 170              |          | 2         | . 8337                                    |
|                     | 0,47            | 8  | 4,2   | 0,09       | 310           | 120              |          | 2         | . 8477                                    |
|                     | 0,68            | 10   | 4,3   | 0,09       | 210           | 81               |          | 2         | . 8687                                    |
|                     | 1               | 12   | 4,4   | 0,09       | 150           | 55               |          | 2         | . 8108                                    |
|                     | 1,5             | 12   | 4,6   | 0,09       | 100           | 37               |          | 2         | . 8158                                    |
|                     | 2,2             | 21   | 4,8   | 0,09       | 65            | 25               |          | 2         | . 8228                                    |
|                     | 3,3             | 25   | 5,2   | 0,09       | 44            | 17               |          | 2         | . 8338                                    |
|                     | 4,7             | 31   | 5,8   | 0,09       | 31            | 12               |          | 2         | . 8478                                    |
|                     | 6,8             | 31   | 6,6   | 0,09       | 21            | 8,1              |          | 2         | . 8688                                    |
|                     | 10              | 35   | 7,8   | 0,08       | 13            | 5,5              |          | 2         | . 8109                                    |
|                     | 15              | 40   | 9,5   | 0,08       | 8,5           | 3,7              |          | 2         | . 8159                                    |
|                     | 22              | 55   | 12  | 0,08       | 5,8           | 2,5              |          | 3         | . 8229                                    |
|                     | 33              | 65   | 16  | 0,08       | 3,9           | 1,7              |          | 3         | . 8339                                    |
|                     | 47              | 100  | 22  | 0,08       | 2,7           | 1,2              |          | 5a        | **  |
|                     | 47              | 105  | 22  | 0,08       | 2,7           | 1,2              |          | 4         | . 8479                                    |
|                     | 68              | 120  | 30  | 0,08       | 1,9           | 0,81             |          | 5a        | **  |
|                     | 68              | 125  | 30  | 0,08       | 1,9           | 0,81             |          | 4         | . 8689                                    |
|                     | 100             | 175  | 42  | 0,08       | 1,3           | 0,55             |          | 5         | . 8101                                    |
|                     | 150             | 245  | 61  | 0,08       | 0,85          | 0,37             |          | 6         | . 8151                                    |
|                     | 220             | 350  | 88  | 0,08       | 0,60          | 0,25             |          | 7         | **  |
|                     | 220             | 350  | 88  | 0,08       | 0,614         | 0,20             |          | 00        | . 8221                                    |
|                     | 330             | 480  | 129   | 0,08       | 0,409         | 0,14             |          | 01        | . 8331                                    |
|                     | 470             | 570  | 182   | 0,08       | 0,287         | 0,10             |          | 01        | . 8471                                    |
|                     | 680             | 770  | 261   | 0,08       | 0,199         | 0,080            |          | 02        | . 8681                                    |
|                     | 1000            | 1035   | 382   | 0,08       | 0,135         | 0,065            |          | 03        | . 8102                                    |
| 1500                | 1330            | 571  | 0,11  | 0,122      |               | 0,143            | 04       | . 8152    |   |
| 2200                | 1740            | 836  | 0,13  | 0,099      |               | 0,098            | 05       | . 8222    |   |

\* Replace dot in catalogue number by:

- 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel (preferred for case sizes 2, 3 and 4)  
 3 for style 1 on bandoliers in box (preferred for case sizes 5a, 5, 6 and 7) } case sizes 2 to 7  
 4 for style 2; case sizes 02 to 05;  
 8 for style 3; case sizes 2 to 02.

\*\* See Table 3.

Table 2 (continued)

| U <sub>R</sub><br>V | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C<br>mA | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ | max. ESR<br>Ω | max. impedance Ω |          | case size | catalogue number*<br>2222 021 followed by |
|---------------------|-----------|--|---|------------|---------------|------------------|----------|-----------|---|
|                     | μF        |  |   |            |               | at 10 kHz        | at 1 kHz |           |   |
| 100                 | 1         | 14   | 4,6   | 0,08       | 130           | 90               |          | 2         | .9108                                     |
|                     | 2,2       | 20   | 5,3   | 0,08       | 58            | 41               |          | 2         | .9228                                     |
|                     | 4,7       | 21   | 7   | 0,08       | 27            | 19               |          | 2         | .9478                                     |
|                     | 6,8       | 25   | 8   | 0,08       | 19            | 13               |          | 2         | .9688                                     |
|                     | 10        | 45   | 10  | 0,08       | 13            | 9                |          | 3         | .9109                                     |
|                     | 15        | 55   | 13  | 0,08       | 8,5           | 6                |          | 5a        | **  |
|                     | 15        | 60   | 13  | 0,08       | 8,5           | 6                |          | 4         | .9159                                     |
|                     | 22        | 67   | 17  | 0,08       | 5,8           | 4,1              |          | 5a        | **  |
|                     | 22        | 72   | 17  | 0,08       | 5,8           | 4,1              |          | 4         | .9229                                     |
|                     | 33        | 90   | 24  | 0,08       | 3,9           | 2,7              |          | 4         | .9339                                     |
|                     | 47        | 120  | 32  | 0,08       | 2,7           | 1,9              |          | 5         | .9479                                     |
|                     | 68        | 165  | 45  | 0,08       | 1,9           | 1,3              |          | 6         | .9689                                     |
|                     | 100       | 230  | 64  | 0,08       | 1,3           | 0,9              |          | 7         | **  |
|                     | 100       | 262  | 64  | 0,07       | 1,150         | 1,0              |          | 00        | .9101                                     |
|                     | 150       | 415  | 94  | 0,07       | 0,645         | 0,61             |          | 01        | .9151                                     |
|                     | 220       | 454  | 136   | 0,08       | 0,610         | 0,56             |          | 01        | .9221                                     |
|                     | 330       | 544  | 202   | 0,09       | 0,420         | 0,40             |          | 02        | .9331                                     |
|                     | 470       | 695  | 286   | 0,09       | 0,310         | 0,29             |          | 03        | .9471                                     |
| 680                 | 971       | 412  | 0,09  | 0,195      | 0,18          |                  | 04       | .9681     |   |
| 1000                | 1161      | 604  | 0,10  | 0,160      | 0,15          |                  | 05       | .9102     |   |

\* Replace dot in catalogue number by:  
 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel (preferred for case sizes 2, 3 and 4)  
 3 for style 1 on bandoliers in box (preferred for case sizes 5a, 5, 6 and 7) } case sizes 2 to 7  
 4 for style 2; case sizes 02 to 05;  
 8 for style 3; case sizes 2 to 02.

\*\* See Table 3.

Table 3

| U <sub>R</sub><br>V | nom.<br>cap.<br>μF | case<br>size | catalogue number   |                   |                |
|---------------------|--------------------|--------------|--------------------|-------------------|----------------|
|                     |                    |              | style 1<br>on reel | style 1<br>in box | style 3        |
| 10                  | 1500               | 7            | 2222 021 90524     | 2222 021 90525    | 2222 021 90526 |
| 16                  | 1000               | 7            | 90517              | 90518             | 90519          |
| 25                  | 150                | 5a           | 90534              | 90535             | 90536          |
|                     | 680                | 7            | 90527              | 90528             | 90529          |
| 40                  | 100                | 5a           | 90537              | 90538             | 90539          |
| 63                  | 47                 | 5a           | 90541              | 90542             | 90543          |
|                     | 68                 | 5a           | 90544              | 90545             | 90546          |
|                     | 220                | 7            | 90511              | 90512             | 90513          |
| 100                 | 15                 | 5a           | 90547              | 90548             | 90549          |
|                     | 22                 | 5a           | 90551              | 90552             | 90553          |
|                     | 100                | 7            | 90531              | 90532             | 90533          |

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$

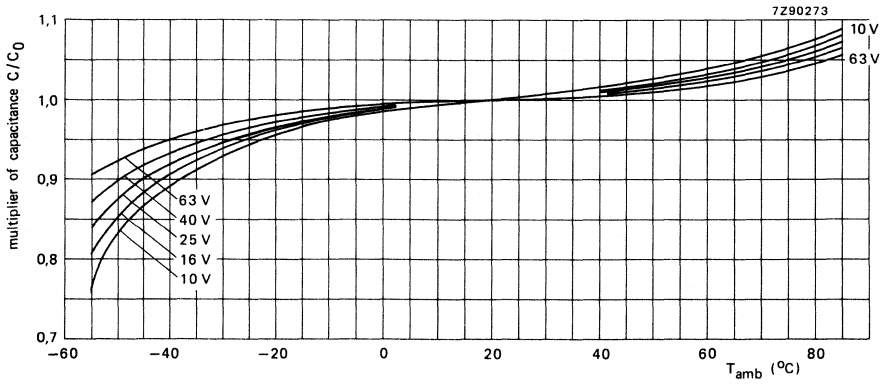


Fig. 4 Multiplier of capacitance as a function of ambient temperature; case sizes 00 to 05;  $C_0$  = capacitance at 20  $^{\circ}\text{C}$ , 100 Hz.

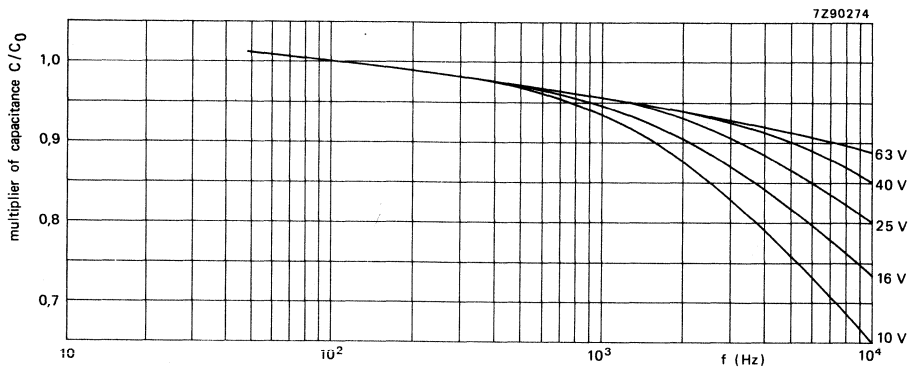


Fig. 5 Multiplier of capacitance as a function of frequency; case sizes 00 to 05;  $C_0$  = capacitance at 20  $^{\circ}\text{C}$ ; 100 Hz.



**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature ▲       |                   |
|--------------------------|-------------------|
| < 60 °C                  | 60 to 90 °C       |
| $1,1 \times U_R$         | $U_R$             |
| $1,1 \times U_R$         | $U_R$             |
| 2 V                      |                   |
| between $U_R$ and $-2 V$ |                   |
| $1,2 \times U_R$         | $1,15 \times U_R$ |
| 2 V                      |                   |

**Ripple current\***

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85 \text{ °C}$

see Table 2

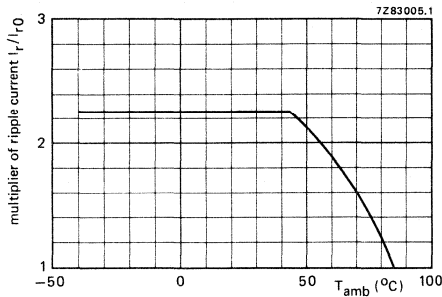


Fig. 6 Multiplier of ripple current as a function of ambient temperature;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

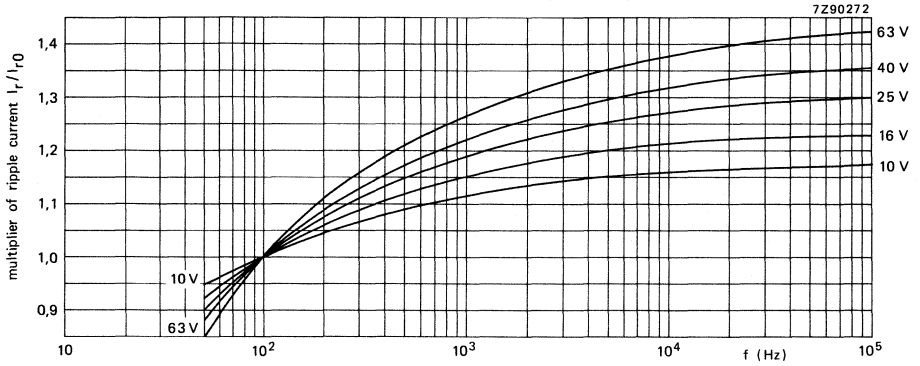


Fig. 7 Multiplier of ripple current as a function of frequency; case sizes 00 to 05;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of the rated voltage at  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ , case sizes 00 to 05, at  $T_{amb} = 25\text{ }^{\circ}\text{C}$

approx. 0,01 x values stated in Table 2

at  $T_{amb} = 85\text{ }^{\circ}\text{C}$

$\leq$  values stated in Table 2

If the d.c. leakage current is too high, owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^{\circ}\text{C}$ ), application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

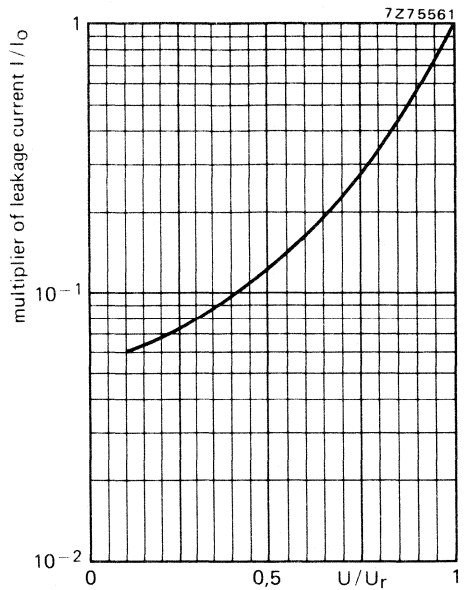
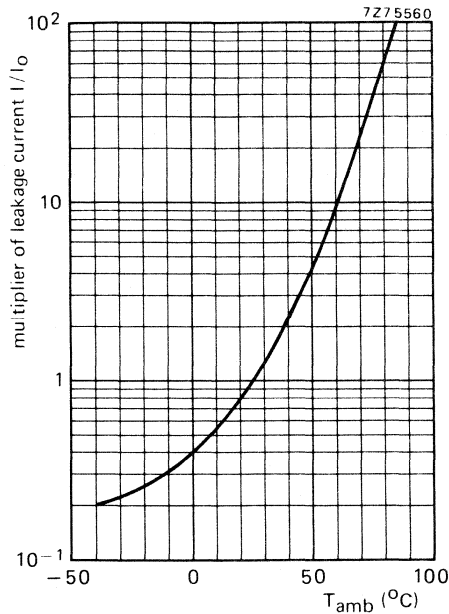


Fig. 8 Multiplier of d.c. leakage current as a function of ambient temperature; case sizes 00 to 05;  $I_0$  = d.c. leakage current during continuous operation at  $25\text{ }^{\circ}\text{C}$  and  $U_R$ .

Fig. 9 Multiplier of d.c. leakage current as a function of  $U/U_R$ ; case sizes 00 to 05;  $I_0$  = d.c. leakage current during continuous operation at  $25\text{ }^{\circ}\text{C}$  and  $U_R$ .

**Tan  $\delta$**  (dissipation factor)

Maximum  $\tan \delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ ,  
measured by means of a four-terminal circuit  
(Thomson circuit)

see Table 2

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured  
by means of a four-terminal circuit  
(Thomson circuit)

see Table 2

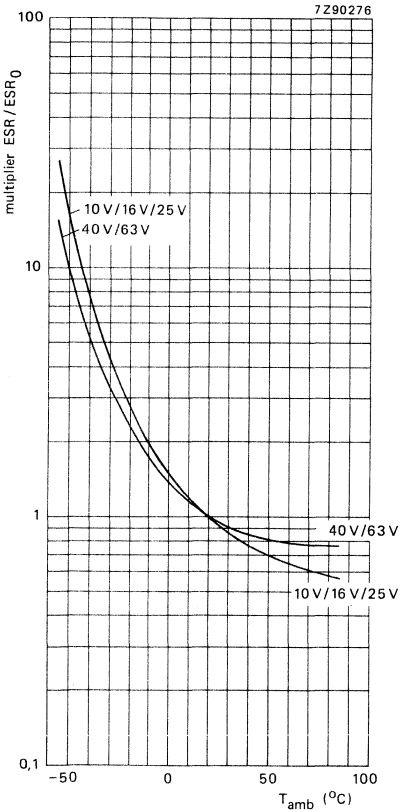


Fig. 10 Multiplier of ESR as a function of ambient temperature, case sizes 00, 01 and 02; ESR<sub>0</sub> = typical ESR at 20 °C, 100 Hz.

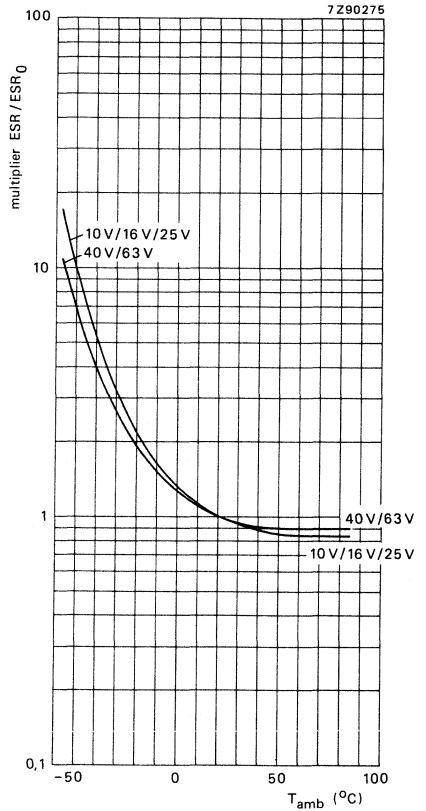


Fig. 11 Multiplier of ESR as a function of ambient temperature, case sizes 03, 04 and 05; ESR<sub>0</sub> = typical ESR at 20 °C, 100 Hz.

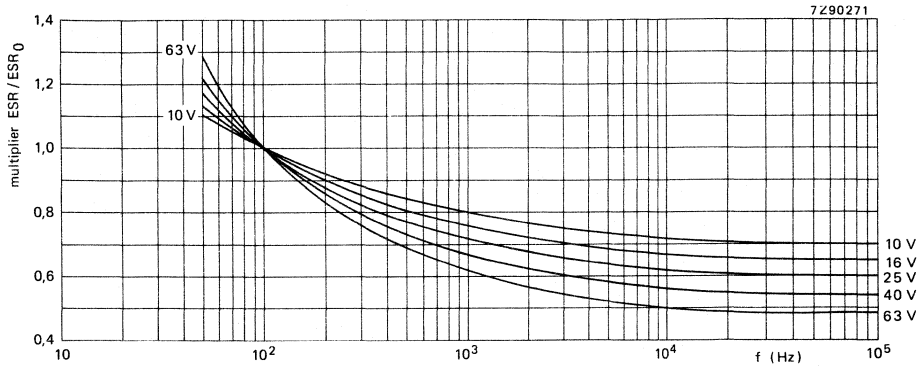


Fig. 12 Multiplier of ESR as a function of frequency; case sizes 00 to 05; ESR<sub>0</sub> = typical ESR at 20 °C, 100 Hz.

**Impedance**

Maximum impedance at T<sub>amb</sub> = 25 °C and 1 kHz or 10 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

z = Z × C<sub>nom</sub>, at 10 kHz; case sizes 2 to 7

see Table 4

**Table 4**

| T <sub>amb</sub> | z = Z × C <sub>nom</sub> (Ω μF) at U <sub>R</sub> ; at 10 kHz |           |           |           |           |           |
|------------------|---|-----------|-----------|-----------|-----------|-----------|
|                  | 10 V  | 16 V      | 25 V      | 40 V      | 63 V      | 100 V     |
| +20 °C           | ≤ 200   | ≤ 160     | ≤ 120     | ≤ 70      | ≤ 55      | ≤ 90      |
| -25 °C           | ≤ 1200  | ≤ 750     | ≤ 560     | ≤ 300     | ≤ 180     | ≤ 600     |
| -40 °C           | ≤ 3200  | ≤ 2000    | ≤ 1500    | ≤ 900     | ≤ 500     | ≤ 1600    |
| -55 °C           | typ. 9000   | typ. 6500 | typ. 5000 | typ. 3000 | typ. 1500 | typ. 5000 |

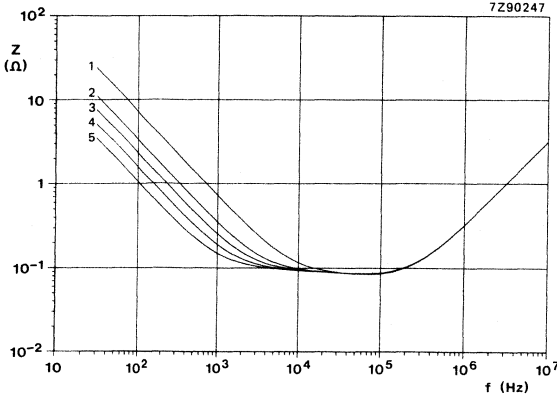


Fig. 13 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^\circ\text{C}$ , case size 00.

Curve 1 = 220  $\mu\text{F}$ , 63 V;  
 curve 2 = 470  $\mu\text{F}$ , 40 V;  
 curve 3 = 680  $\mu\text{F}$ , 25 V;  
 curve 4 = 1000  $\mu\text{F}$ , 16 V;  
 curve 5 = 1500  $\mu\text{F}$ , 10 V.

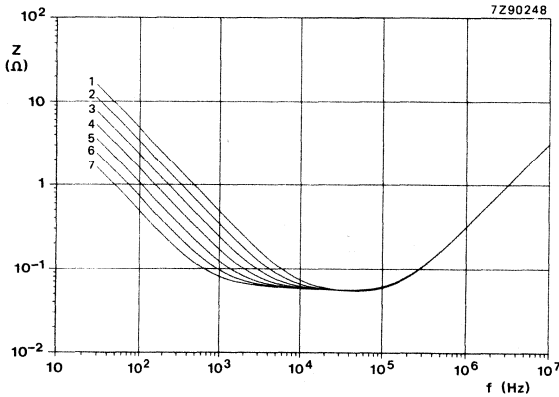


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^\circ\text{C}$ , case size 01.

Curve 1 = 330  $\mu\text{F}$ , 63 V;  
 curve 2 = 470  $\mu\text{F}$ , 63 V;  
 curve 3 = 680  $\mu\text{F}$ , 40 V;  
 curve 4 = 1000  $\mu\text{F}$ , 25 V and 40 V;  
 curve 5 = 1500  $\mu\text{F}$ , 16 V and 25 V;  
 curve 6 = 2200  $\mu\text{F}$ , 10 V and 16 V;  
 curve 7 = 3300  $\mu\text{F}$ , 10 V.

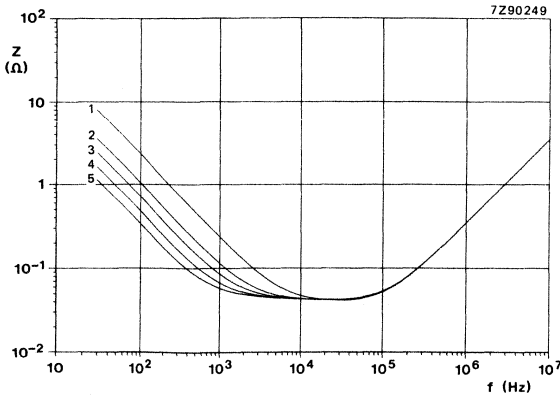


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^\circ\text{C}$ , case size 02.

Curve 1 = 680  $\mu\text{F}$ , 63 V;  
 curve 2 = 1500  $\mu\text{F}$ , 40 V;  
 curve 3 = 2200  $\mu\text{F}$ , 25 V;  
 curve 4 = 3300  $\mu\text{F}$ , 16 V;  
 curve 5 = 4700  $\mu\text{F}$ , 10 V.

Fig. 16 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 03.

Curve 1 =  $1000\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $2200\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $3300\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $4700\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $6800\text{ }\mu\text{F}$ , 10 V.

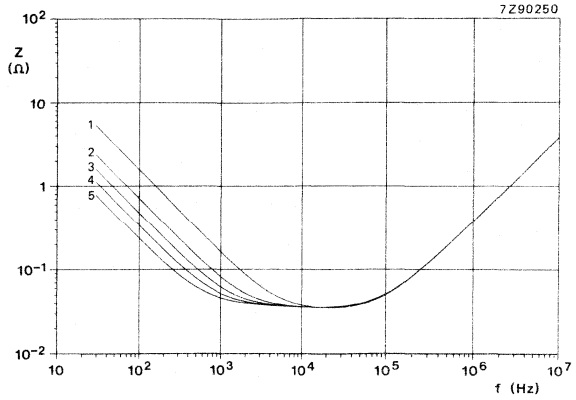


Fig. 17 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 04.

Curve 1 =  $1500\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $3300\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $4700\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $6800\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $10\text{ }000\text{ }\mu\text{F}$ , 10 V.

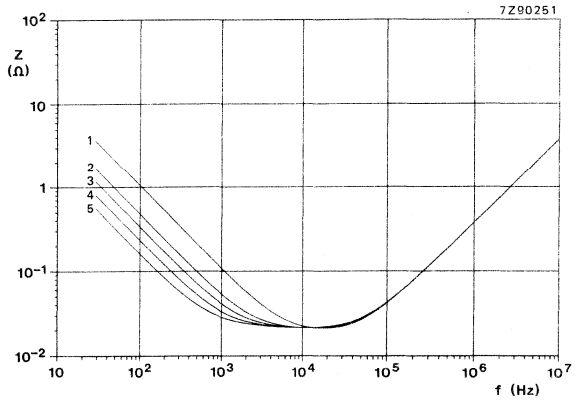
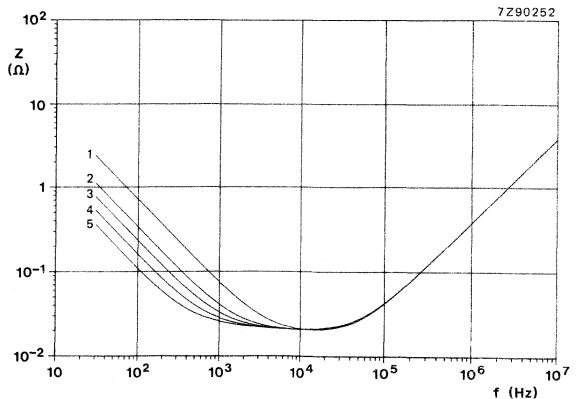


Fig. 18 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 05.

Curve 1 =  $2200\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $4700\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $6800\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $10\text{ }000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $15\text{ }000\text{ }\mu\text{F}$ , 10 V.



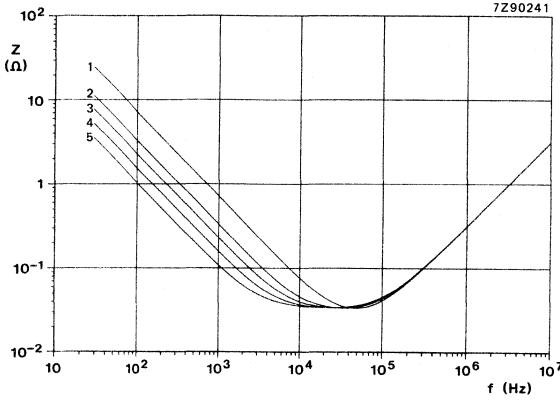


Fig. 19 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 00.  
 Curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 10 V.

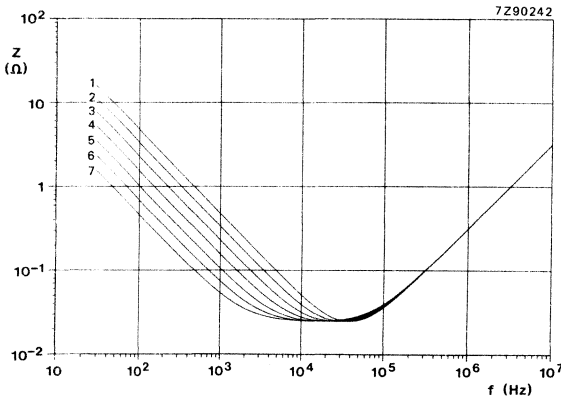


Fig. 20 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 01.  
 Curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V and 40 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V and 25 V;  
 curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V and 16 V;  
 curve 7 =  $3300\text{ }\mu\text{F}$ , 10 V.

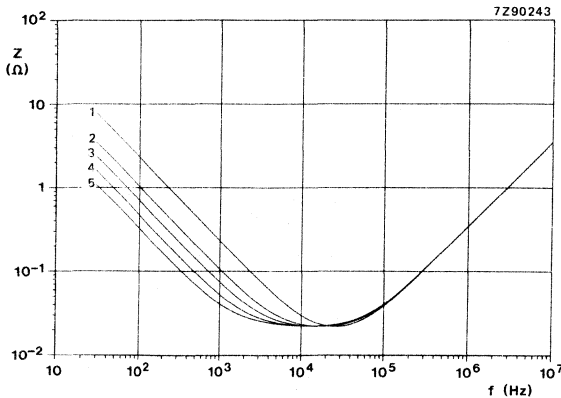


Fig. 21 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 02.  
 Curve 1 =  $680\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $1500\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $2200\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $3300\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $4700\text{ }\mu\text{F}$ , 10 V.



Fig. 22 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 03.

Curve 1 =  $1000\text{ }\mu\text{F}$ , 63 V;  
curve 2 =  $2200\text{ }\mu\text{F}$ , 40 V;  
curve 3 =  $3300\text{ }\mu\text{F}$ , 25 V;  
curve 4 =  $4700\text{ }\mu\text{F}$ , 16 V;  
curve 5 =  $6800\text{ }\mu\text{F}$ , 10 V.

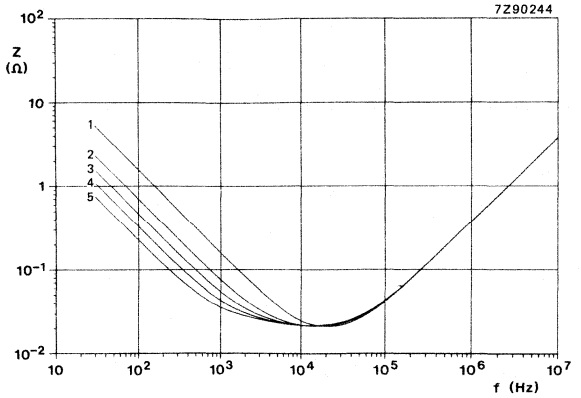


Fig. 23 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 04.

Curve 1 =  $1500\text{ }\mu\text{F}$ , 63 V;  
curve 2 =  $3300\text{ }\mu\text{F}$ , 40 V;  
curve 3 =  $4700\text{ }\mu\text{F}$ , 25 V;  
curve 4 =  $6800\text{ }\mu\text{F}$ , 16 V;  
curve 5 =  $10\text{ }000\text{ }\mu\text{F}$ , 10 V.

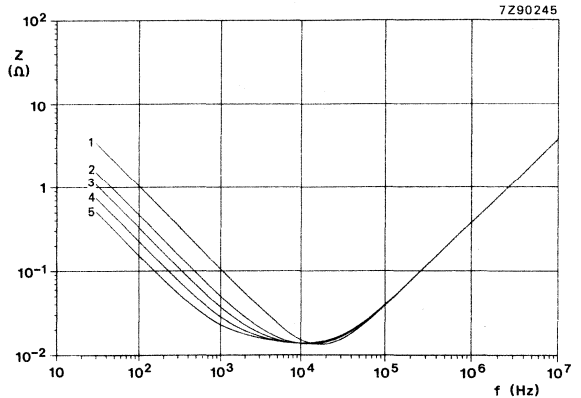
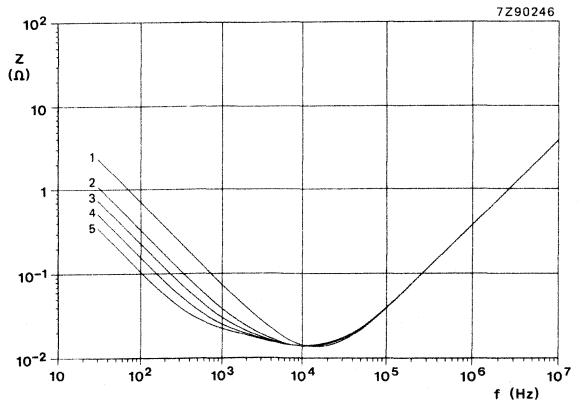


Fig. 24 Typical impedance as a function of frequency at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , case size 05.

Curve 1 =  $2200\text{ }\mu\text{F}$ , 63 V;  
curve 2 =  $4700\text{ }\mu\text{F}$ , 40 V;  
curve 3 =  $6800\text{ }\mu\text{F}$ , 25 V;  
curve 4 =  $10\text{ }000\text{ }\mu\text{F}$ , 16 V;  
curve 5 =  $15\text{ }000\text{ }\mu\text{F}$ , 10 V.



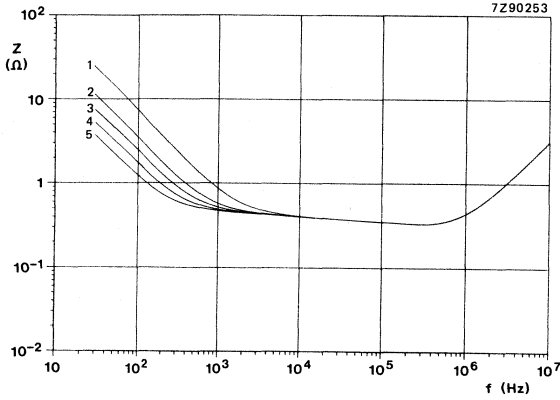


Fig. 25 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 00.

Curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 10 V.

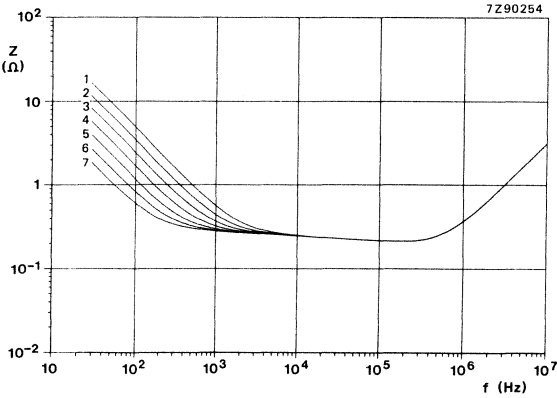


Fig. 26 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 01.

Curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V and 40 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V and 25 V;  
 curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V and 16 V;  
 curve 7 =  $3300\text{ }\mu\text{F}$ , 10 V.

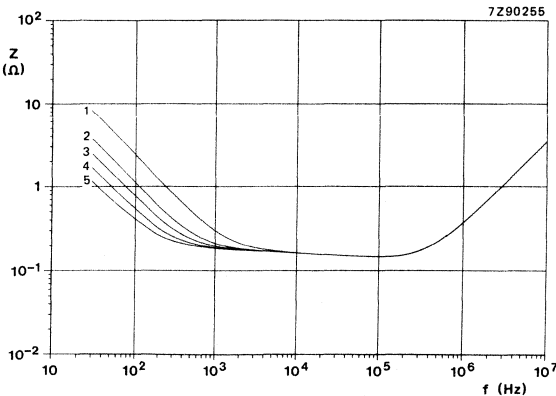


Fig. 27 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 02.

Curve 1 =  $680\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $1500\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $2200\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $3300\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $4700\text{ }\mu\text{F}$ , 10 V.

Fig. 28 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 03.

Curve 1 =  $1000\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $2200\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $3300\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $4700\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $6800\text{ }\mu\text{F}$ , 10 V.

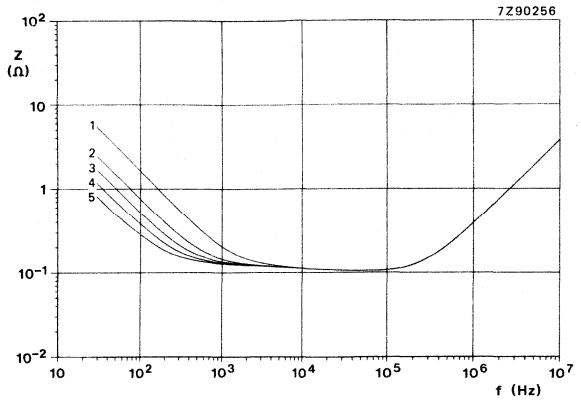


Fig. 29 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 04.

Curve 1 =  $1500\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $3300\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $4700\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $6800\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $10\text{ }000\text{ }\mu\text{F}$ , 10 V.

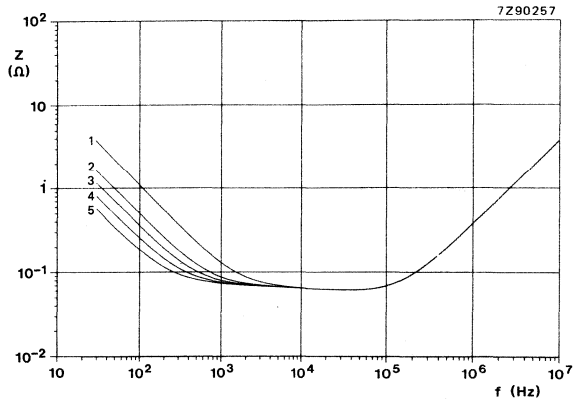
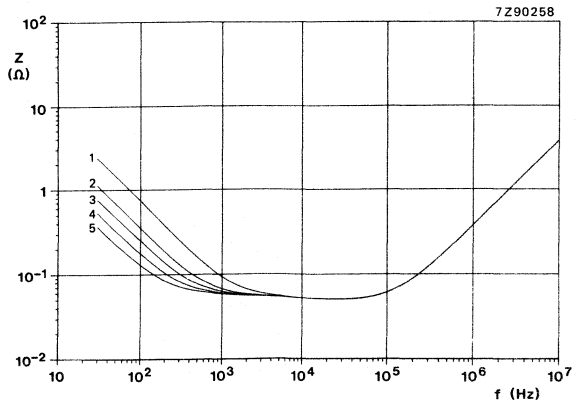


Fig. 30 Typical impedance as a function of frequency at  $T_{amb} = -25\text{ }^{\circ}\text{C}$ , case size 05.

Curve 1 =  $2200\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $4700\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $6800\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $10\text{ }000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $15\text{ }000\text{ }\mu\text{F}$ , 10 V.



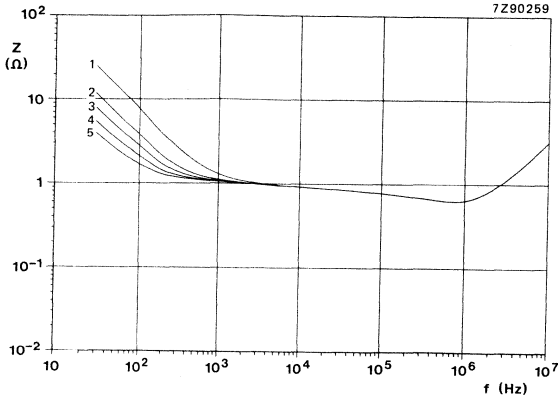


Fig. 31 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 00.

Curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 10 V.

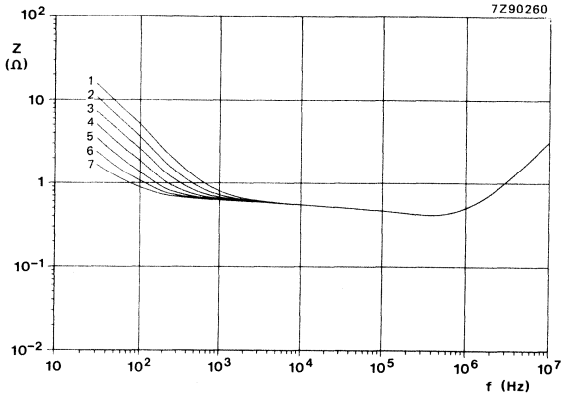


Fig. 32 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 01.

Curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V and 40 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V and 25 V;  
 curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V and 16 V;  
 curve 7 =  $3300\text{ }\mu\text{F}$ , 10 V.

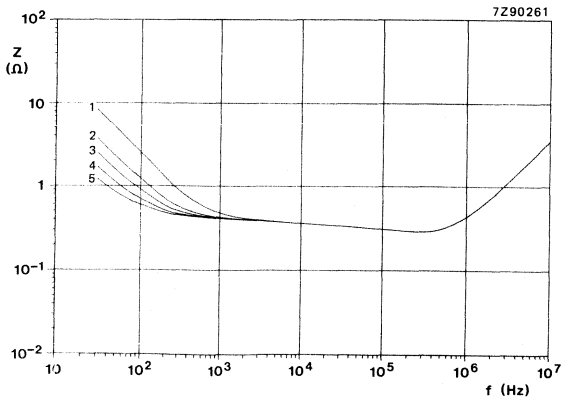


Fig. 33 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 02.

Curve 1 =  $680\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $1500\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $2200\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $3300\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $4700\text{ }\mu\text{F}$ , 10 V.

Fig. 34 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 03.

Curve 1 =  $1000\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $2200\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $3300\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $4700\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $6800\text{ }\mu\text{F}$ , 10 V.

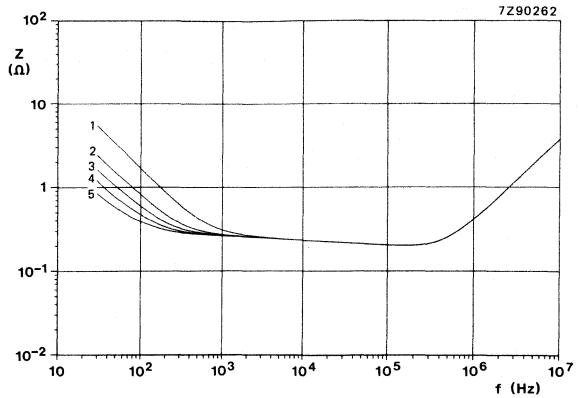


Fig. 35 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 04.

Curve 1 =  $1500\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $3300\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $4700\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $6800\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $10\text{ }000\text{ }\mu\text{F}$ , 10 V.

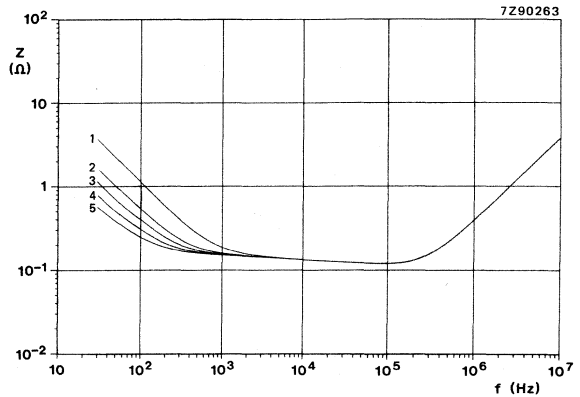
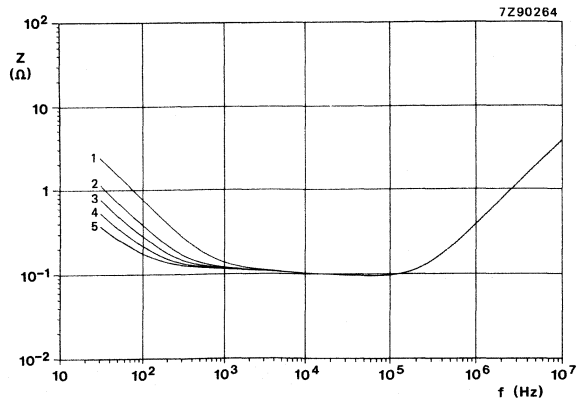


Fig. 36 Typical impedance as a function of frequency at  $T_{amb} = -40\text{ }^{\circ}\text{C}$ , case size 05.

Curve 1 =  $2200\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $4700\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $6800\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $10\text{ }000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $15\text{ }000\text{ }\mu\text{F}$ , 10 V.



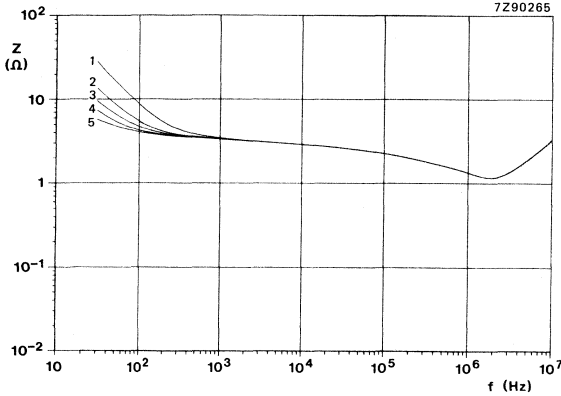


Fig. 37 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 00.

Curve 1 =  $220\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 10 V.

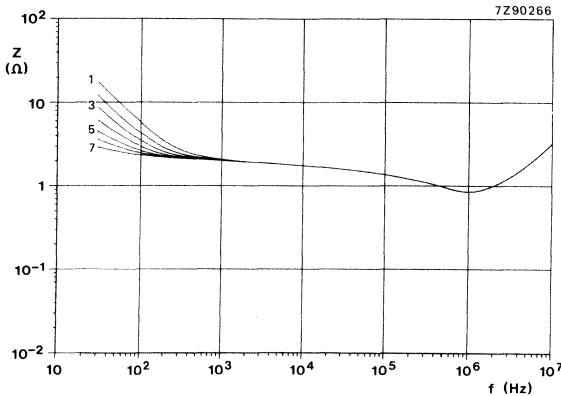


Fig. 38 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 01.

Curve 1 =  $330\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $470\text{ }\mu\text{F}$ , 63 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 40 V;  
 curve 4 =  $1000\text{ }\mu\text{F}$ , 25 V and 40 V;  
 curve 5 =  $1500\text{ }\mu\text{F}$ , 16 V and 25 V;  
 curve 6 =  $2200\text{ }\mu\text{F}$ , 10 V and 16 V;  
 curve 7 =  $3300\text{ }\mu\text{F}$ , 10 V.

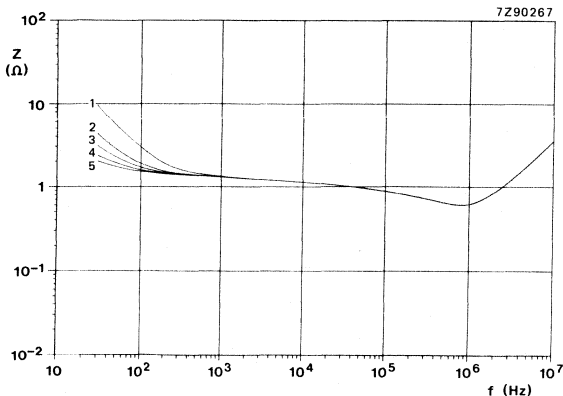


Fig. 39 Typical impedance as a function of frequency at  $T_{amb} = -55\text{ }^{\circ}\text{C}$ , case size 02.

Curve 1 =  $680\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $1500\text{ }\mu\text{F}$ , 40 V;  
 curve 3 =  $2200\text{ }\mu\text{F}$ , 25 V;  
 curve 4 =  $3300\text{ }\mu\text{F}$ , 16 V;  
 curve 5 =  $4700\text{ }\mu\text{F}$ , 10 V.

Fig. 40 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 03.

Curve 1 = 1000  $\mu\text{F}$ , 63 V;  
 Curve 2 = 2200  $\mu\text{F}$ , 40 V;  
 Curve 3 = 3300  $\mu\text{F}$ , 25 V;  
 Curve 4 = 4700  $\mu\text{F}$ , 16 V;  
 Curve 5 = 6800  $\mu\text{F}$ , 10 V.

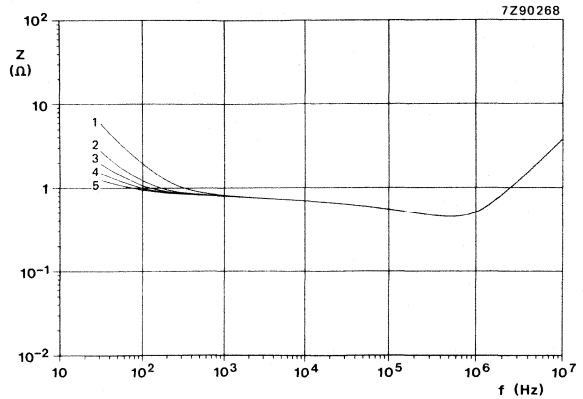


Fig. 41 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 04.

Curve 1 = 1500  $\mu\text{F}$ , 63 V;  
 Curve 2 = 3300  $\mu\text{F}$ , 40 V;  
 Curve 3 = 4700  $\mu\text{F}$ , 25 V;  
 Curve 4 = 6800  $\mu\text{F}$ , 16 V;  
 Curve 5 = 10 000  $\mu\text{F}$ , 10 V.


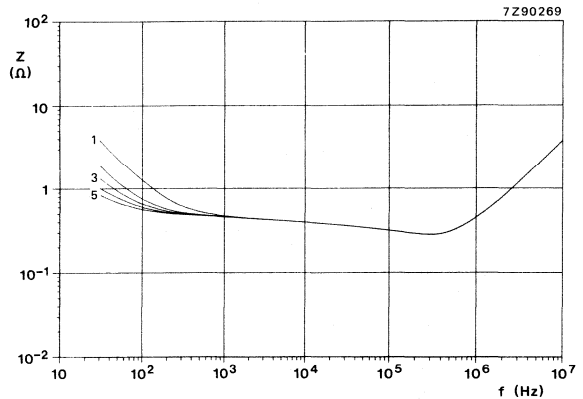


Fig. 42 Typical impedance as a function of frequency at  $T_{amb} = -55^{\circ}\text{C}$ , case size 05.

Curve 1 = 2200  $\mu\text{F}$ , 63 V;  
 Curve 2 = 4700  $\mu\text{F}$ , 40 V;  
 Curve 3 = 6800  $\mu\text{F}$ , 25 V;  
 Curve 4 = 10 000  $\mu\text{F}$ , 16 V;  
 Curve 5 = 15 000  $\mu\text{F}$ , 10 V.

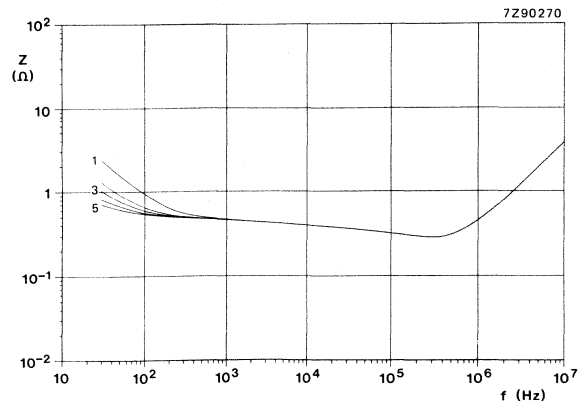

**Equivalent series inductance (ESL)**

|                          |            |
|--------------------------|------------|
| Case size 2              | typ. 17 nH |
| Case sizes 3 and 4       | typ. 30 nH |
| Case size 5a             | typ. 85 nH |
| Case size 5              | typ. 50 nH |
| Case sizes 6 and 7       | typ. 65 nH |
| Case sizes 00 and 01     | typ. 50 nH |
| Case size 02             | typ. 55 nH |
| Case sizes 03, 04 and 05 | typ. 60 nH |

**OPERATIONAL DATA**

Category temperature range

-55 to + 85 °C

Typical life time

case sizes 2 to 7

case sizes 00 to 05

| $T_{amb} = 85\text{ °C}$ |        | $T_{amb} = 40\text{ °C}$ |
|--------------------------|--------|--------------------------|
| 2000 h                   | 5000 h | 50 000 h                 |
|                          |        | < 100 000 h              |

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$

500 h

**PACKING**

All capacitors are supplied in boxes, except case sizes 2 to 7 of style 1, which are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 5.

**Table 5**

| case size | number of capacitors |                 |                        |
|-----------|----------------------|-----------------|------------------------|
|           | style 1 per reel     | style 1 per box | styles 2 and 3 per box |
| 2         | 3000                 | 1000            | 1000                   |
| 3         | 1000                 | 1000            | 1000                   |
| 5a        | 500                  | 500             | 1000                   |
| 4         | 1000                 | 1000            | 1000                   |
| 5         | 500                  | 500             | 1000                   |
| 6         | 500                  | 500             | 1000                   |
| 7         | 500                  | 500             | 500                    |
| 00        |                      | 200             | 200                    |
| 01        |                      | 200             | 200                    |
| 02        |                      | 200             | 200                    |
| 03        |                      | 200             | 200                    |
| 04        |                      | 100             | 100                    |
| 05        |                      | 100             | 100                    |



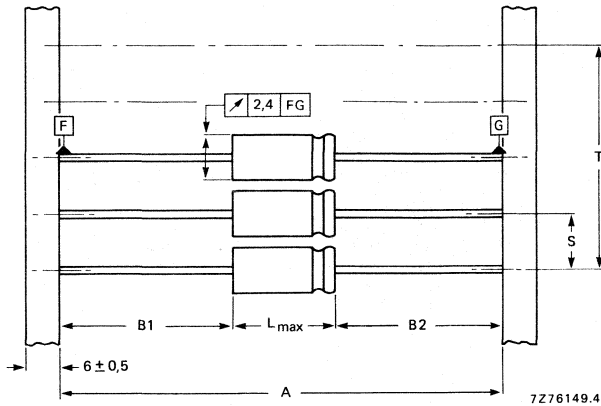


Fig. 43 Style 1 capacitors (case sizes 2 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 6 for dimensions A, S, T and  $L_{max}$ .  $|B1-B2| = \max. 1,4 \text{ mm}$ .

**Table 6**

Dimensions in mm

| case size | A              | S             | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|----------------|---------------|--------------------------------|------------------|-----------|
|           |                |               | $n < 50$                       | $50 < n < 100$   |           |
| 2         | $63,5 \pm 1,5$ | $5 \pm 0,4$   | $5 (n-1) \pm 2$                | $5 (n-1) \pm 4$  | 10,5      |
| 3         | $63,5 \pm 1,5$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 10,5      |
| 5a        | $63,5 \pm 1,5$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 11,5      |
| 4         | $73 \pm 1,6$   | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 5         | $73 \pm 1,6$   | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 6         | $73 \pm 1,6$   | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 18,5      |
| 7         | $73 \pm 1,6$   | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 25,0      |

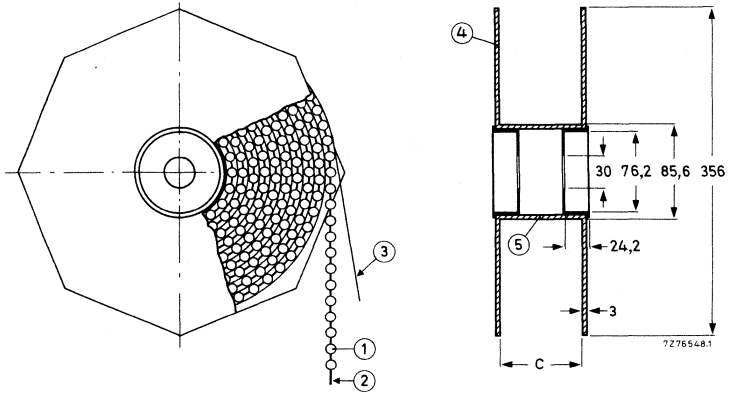


Fig. 44 Style 1 capacitors (case sizes 2 to 7) on bandoliers on reel; dimensions C is 83,5 mm for case sizes 2, 3 and 5a, and 88,5 mm for case sizes 4, 5, 6 and 7; the overall width of the reel is 94,5 mm and 99,5 mm respectively.

- 1 = capacitor
- 2 = bandolier
- 3 = paper
- 4 = flange
- 5 = cylinder

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.


After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current (case size 2 to 7):  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

**Note:**

Capacitors 2222 021 are miniature types, general-purpose grade, and small types, long-life grade.

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads or single ended
- Long life
- General and industrial applications

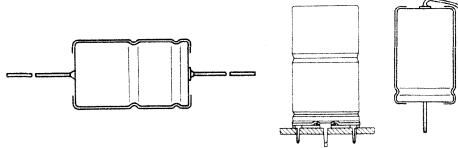

Selection chart for  $C_{nom} \cdot U_R$  and relevant case sizes

| $C_{nom}$<br>$\mu F$                            | $U_R$ (V) |      |      |      |      |      |      |  |      |     |     |    |
|---|-----------|------|------|------|------|------|------|--|------|-----|-----|----|
|   | 6,3       | 10   | 16   | 25   | 40   | 63   | 100  | 160  | 250  | 350 | 385 |    |
| 0,33  |           |      |      |      |      | 2    |      |  |      |     |     |    |
| 0,47  |           |      |      |      |      | 2    |      |  |      |     |     |    |
| 0,68  |           |      |      |      |      | 2    |      |  |      |     |     |    |
| 1   |           |      |      |      |      | 2    | 2    |  |      |     | 4   |    |
| 1,5   |           |      |      |      |      | 2    |      |  |      |     |     |    |
| 2,2   |           |      |      |      | 1    | 2    | 2    |  | 4    |     | 5   |    |
| 3,3   |           |      |      | 1    |      | 2    | 2    |  |      |     |     |    |
| 4,7   |           |      | 1    |      |      | 2    | 3    | 4  | 5    | 6   | 7   |    |
| 6,8   |           | 1    |      |      | 2    | 2    | 3    |  |      | 00  | 00  |    |
| 10  | 1         |      |      | 2    | 2    | 3    | 4/5a | 5  | 7/00 | 01  | 01  |    |
| 15  |           |      | 2    |      | 2    | 3    |      |  |      | 01  | 01  | 02 |
| 22  |           | 2    |      | 2    | 3    | 4/5a | 5    | 7/00                                       | 01   | 02  | 03  |    |
| 33  | 2         |      | 2    |      | 3    |      | 6    | 01   | 02   | 03  | 04  |    |
| 47  |           | 2    |      | 3    | 4/5a | 5    | 7    | 02   | 03   | 04  | 04  |    |
| 68  | 2         |      | 3    |      |      | 6    | 00   | 02   | 04   | 05  | 05  |    |
| 100   |           | 3    |      | 4/5a | 5    | 7    | 01   | 03   | 05   |     |     |    |
| 150   | 3         |      | 4/5a | 5    | 6    | 00   | 02   | 04   |      |     |     |    |
| 220   |           | 4/5a | 5    | 6    | 7/00 | 01   | 03   | 05   |      |     |     |    |
| 330   |           | 5    | 6    | 7    | 01   | 02   | 04   |  |      |     |     |    |
| 470   | 5         | 6    | 7    | 00   | 01   | 02   | 05   |  |      |     |     |    |
| 680   | 6         | 7    | 00   | 01   | 02   | 03   | 05   |  |      |     |     |    |
| 1 000   | 7         | 00   | 01   | 02   | 03   | 05   |      |  |      |     |     |    |
| 1 500   | 00        | 01   | 02   | 03   | 04   | 05   |      |  |      |     |     |    |
| 2 200   | 01        | 02   | 03   | 04   | 05   |      |      |  |      |     |     |    |
| 3 300   | 02        | 03   | 04   | 05   | 05   |      |      |  |      |     |     |    |
| 4 700   | 03        | 04   | 05   | 05   |      |      |      |  |      |     |     |    |
| 6 800   | 04        | 05   | 05   |      |      |      |      |  |      |     |     |    |
| 10 000  | 05        | 05   |      |      |      |      |      |  |      |     |     |    |
| 15 000  | 05        |      |      |      |      |      |      |  |      |     |     |    |
| 2222 030; 031; 032; 033<br>see pages 109 to 151 |           |      |      |      |      |      |      | 2222 041; 042; 043<br>see pages 203 to 221 |      |     |     |    |

Miniature types

| case size | nominal dimensions mm  | series number |
|-----------|------------------------|---------------|
| 1         | $\varnothing$ 3,3 x 11 | 030           |
| 2         | $\varnothing$ 4,5 x 10 |               |
| 3         | $\varnothing$ 6 x 10   |               |
| 5a        | $\varnothing$ 8 x 11   |               |
| 4         | $\varnothing$ 6,5 x 18 | 031<br>041    |
| 5         | $\varnothing$ 8 x 18   |               |
| 6         | $\varnothing$ 10 x 18  |               |
| 7         | $\varnothing$ 10 x 25  |               |


Small types

| case size | nominal dimensions mm   | series number |
|-----------|-------------------------|---------------|
| 00        | $\varnothing$ 10 x 30   | 032           |
| 01        | $\varnothing$ 12,5 x 30 |               |
| 02        | $\varnothing$ 15 x 30   |               |
| 03        | $\varnothing$ 18 x 30   | 042           |
| 04        | $\varnothing$ 18 x 40   |               |
| 05        | $\varnothing$ 21 x 40   |               |



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads and single ended
- Long life
- General and industrial applications

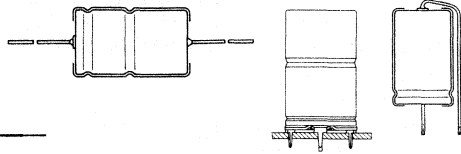

### QUICK REFERENCE DATA

Nominal capacitance range  
 (E6 series): 0,33 to 15 000  $\mu\text{F}$

Tolerance on nominal capacitance: -10 to +50%

Rated voltage range,  $U_R$   
 (R5 series): 6,3 to 100 V

Category temperature range:  
 case sizes 1 to 7 -55 to +85  $^{\circ}\text{C}$   
 case sizes 00 to 05 -40 to +85  $^{\circ}\text{C}$

Endurance test at 85  $^{\circ}\text{C}$   
 case size 1: 1000 h  
 case sizes 2 to 7: 2000 h  
 case sizes 00 to 05: 5000 h

Shelf life at 0 V; 85  $^{\circ}\text{C}$ : 500 h

Basic specifications:  
 IEC 384-4, long-life grade\*  
 DIN 41316 (6,3 to 63 V versions)  
 DIN 41332 (100 V version)

Climatic category  
 IEC 68, case sizes 1 to 7: 55/085/56  
 case sizes 00 to 05: 40/085/56  
 DIN 40040, case sizes 1 to 7: FPF  
 case sizes 00 to 05: GPF

Selection chart for  $C_{\text{nom}}$ - $U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |      |      |      |      |
|-----------------------------------|-----------|------|------|------|------|------|------|
|                                   | 6,3       | 10   | 16   | 25   | 40   | 63   | 100  |
| 0,33                              |           |      |      |      |      | 2    |      |
| 0,47                              |           |      |      |      |      | 2    |      |
| 0,68                              |           |      |      |      |      | 2    |      |
| 1                                 |           |      |      |      |      | 2    | 2    |
| 1,5                               |           |      |      |      |      | 2    | 2    |
| 2,2                               |           |      |      |      | 1    | 2    | 2    |
| 3,3                               |           |      |      | 1    |      | 2    | 2    |
| 4,7                               |           |      | 1    |      |      | 2    | 3    |
| 6,8                               |           | 1    |      |      |      | 2    | 3    |
| 10                                | 1         |      |      | 2    | 2    | 3    | 4/5a |
| 15                                |           |      | 2    |      | 2    | 3    |      |
| 22                                |           | 2    |      | 2    | 3    | 4/5a | 5    |
| 33                                | 2         |      | 2    |      | 3    |      | 6    |
| 47                                |           | 2    |      | 3    | 4/5a | 5    | 7    |
| 68                                | 2         |      | 3    |      |      | 6    | 00   |
| 100                               |           | 3    |      | 4/5a | 5    | 7    | 01   |
| 150                               | 3         |      | 4/5a | 5    | 6    | 00   | 02   |
| 220                               |           | 4/5a | 5    | 6    | 7/00 | 01   | 03   |
| 330                               |           | 5    | 6    | 7    | 01   | 02   | 04   |
| 470                               | 5         | 6    | 7    | 00   | 01   | 02   | 05   |
| 680                               | 6         | 7    | 00   | 01   | 02   | 03   | 05   |
| 1 000                             | 7         | 00   | 01   | 02   | 03   | 05   |      |
| 1 500                             | 00        | 01   | 02   | 03   | 04   | 05   |      |
| 2 200                             | 01        | 02   | 03   | 04   | 05   |      |      |
| 3 300                             | 02        | 03   | 04   | 05   | 05   |      |      |
| 4 700                             | 03        | 04   | 05   | 05   |      |      |      |
| 6 800                             | 04        | 05   | 05   |      |      |      |      |
| 10 000                            | 05        | 05   |      |      |      |      |      |
| 15 000                            | 05        |      |      |      |      |      |      |

| case size | nominal dimensions (mm) | series number |           |
|-----------|-------------------------|---------------|-----------|
| 1         | $\varnothing$ 3,3 x 11  | 030           | miniature |
| 2         | $\varnothing$ 4,5 x 10  |               |           |
| 3         | $\varnothing$ 6 x 10    |               |           |
| 5a        | $\varnothing$ 8 x 11    |               |           |
| 4         | $\varnothing$ 6,5 x 18  |               |           |
| 5         | $\varnothing$ 8 x 18    |               |           |
| 6         | $\varnothing$ 10 x 18   |               |           |
| 7         | $\varnothing$ 10 x 25   |               |           |
| 00        | $\varnothing$ 10 x 30   | 032           | small     |
| 01        | $\varnothing$ 12,5 x 30 |               |           |
| 02        | $\varnothing$ 15 x 30   |               |           |
| 03        | $\varnothing$ 18 x 30   |               |           |
| 04        | $\varnothing$ 18 x 40   |               |           |
| 05        | $\varnothing$ 21 x 40   |               |           |

\* Not applicable to case size 1, which is general-purpose grade.

2222 030  
 2222 031  
 2222 032  
 2222 033

**APPLICATION**

These capacitors with high CU-product per unit volume are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications, such as measuring and regulating circuits. Other applications are in timing and delay circuits. The taped versions are extremely suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitors are available in 3 styles, all with soldered-copper leads.

Style 1: axial leads; all case sizes; case sizes 1 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 02 to 05.

Style 3: single ended; case sizes 1 to 7 and 00 to 02.

**MECHANICAL DATA**

Dimensions in mm

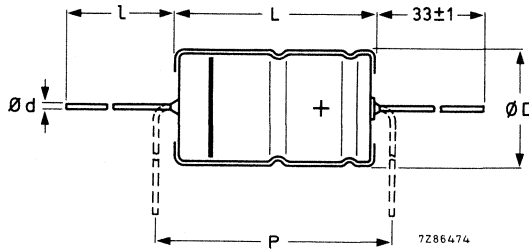


Fig. 1 Style 1; see Table 1a for dimensions d, D, L, I and P.

Table 1a

| case size | d   | l      | style 1          |                  |                  |                  |                  | mass approx. g |
|-----------|-----|--------|------------------|------------------|------------------|------------------|------------------|----------------|
|           |     |        | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| 1         | 0,6 | *      | 3,3              | 11,0             | 3,5              | 12,0             | 15               | 0,35           |
| 2         | 0,6 | *      | 4,5              | 10,0             | 5,0              | 10,5             | 15               | 0,50           |
| 3         | 0,6 | *      | 6,0              | 10,0             | 6,3              | 10,5             | 15               | 0,70           |
| 5a        | 0,6 | *      | 8,0              | 11,0             | 8,5              | 11,5             | 15               | 1,1            |
| 4         | 0,8 | *      | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | 0,8 | *      | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | 0,8 | *      | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | 0,8 | *      | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 0,8 | 55 ± 1 | 10,0             | 30,0             | 10,5             | 30,5             | 35,0             | 4              |
| 01        | 0,8 | 55 ± 1 | 12,5             | 30,0             | 13,0             | 30,5             | 35,0             | 6,3            |
| 02        | 0,8 | 55 ± 1 | 15,0             | 30,0             | 15,5             | 30,5             | 35,0             | 8,2            |
| 03        | 0,8 | 55 ± 1 | 18,0             | 30,0             | 18,5             | 30,5             | 35,0             | 10,9           |
| 04        | 0,8 | 34 ± 1 | 18,0             | 40,0             | 18,5             | 41,5             | 45,0             | 14             |
| 05        | 0,8 | 34 ± 1 | 21,0             | 40,0             | 21,5             | 41,5             | 45,0             | 19             |

\* Case sizes 1 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).

Table 1b

| case size | style 2        |                |      |                   |            |        | mass approx.<br>g |
|-----------|----------------|----------------|------|-------------------|------------|--------|-------------------|
|           | d <sub>1</sub> | d <sub>2</sub> | D1   | D2 <sub>max</sub> | D3         | L      |                   |
| 02        | 0,8            | 1 + 0,1        | 15,0 | 17,5              | 16,5 ± 0,2 | 31 ± 1 | 8,6               |
| 03        | 0,8            | 1 + 0,1        | 18,0 | 19,5              | 18,5 ± 0,2 | 31 ± 1 | 11,5              |
| 04        | 1,0            | 1,3 + 0,1      | 18,0 | 19,5              | 18,5 ± 0,2 | 42 ± 1 | 14,5              |
| 05        | 1,0            | 1,3 + 0,1      | 21,0 | 22,5              | 21,5 ± 0,2 | 42 ± 1 | 19,7              |

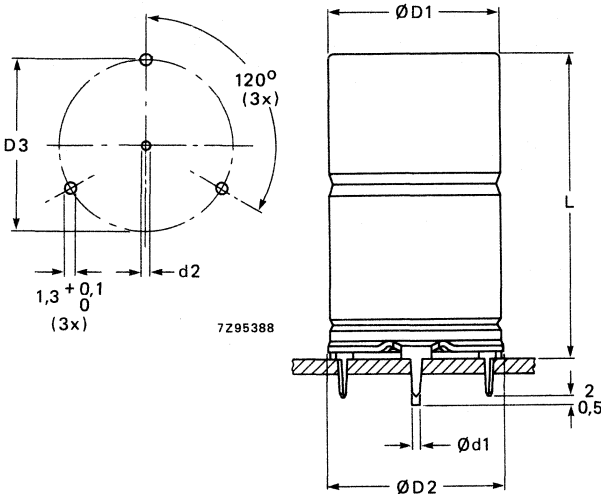


Fig. 2 Style 2; see Table 1b for dimensions d<sub>1</sub>, d<sub>2</sub>, D1, D2, D3 and L.

Table 1c

| case size | d   | style 3          |                  |           | mass approx.<br>g |
|-----------|-----|------------------|------------------|-----------|-------------------|
|           |     | D <sub>max</sub> | L <sub>max</sub> | P         |                   |
| 1         | 0,6 | 3,5              | 14,0             | 2,5- 5    | 0,25              |
| 2         | 0,6 | 5,0              | 12,5             | 2,5- 5    | 0,40              |
| 3         | 0,6 | 6,3              | 12,5             | 3,5- 7,5  | 0,55              |
| 5a        | 0,6 | 8,5              | 13,0             | 5 -10     | 1,0               |
| 4         | 0,8 | 6,9              | 21,5             | 5 -10     | 1,2               |
| 5         | 0,8 | 8,5              | 21,5             | 5 -10     | 1,6               |
| 6         | 0,8 | 10,5             | 21,5             | 7,5-12,5  | 2,3               |
| 7         | 0,8 | 10,5             | 28,0             | 7,5-12,5  | 3,1               |
| 00        | 0,8 | 10,5             | 34,0             | 7,5-12,5  | 3,8               |
| 01        | 0,8 | 13,0             | 34,0             | 7,5-12,5  | 6,1               |
| 02        | 0,8 | 15,5             | 34,0             | 10,0-15,0 | 8,0               |





Fig. 3 Style 3 see Table 1c for dimensions d, D, L and P.



2222 030  
2222 031  
2222 032  
2222 033

### Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance (not for case size 1);
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal (not for case sizes 1 to 5a).

### Mounting

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameters are shown in Table 1d.

Table 1d

| style   | lead/pin diameter | required hole diameter |
|---------|-------------------|------------------------|
| 1 and 3 | 0,6 mm lead       | 0,8 + 0,1 mm           |
|         | 0,8 mm lead       | 1,0 + 0,1 mm           |
| 2       | 0,8 mm anode pin  | 1 + 0,1 mm             |
|         | 1,0 mm anode pin  | 1,3 + 0,1 mm           |
|         | cathode pins      | 1,3 + 0,1 mm           |

Minimum atmospheric pressure

8,5 kPa

### PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.



## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at 85 °C | max. d.c. leakage current at U <sub>R</sub> after 1 min. | max. tan δ | max. ESR | max. impedance |          | case size | catalogue number *<br>2222 followed by |
|----------------|-----------|-------------------------------------|--|------------|----------|----------------|----------|-----------|--|
|                | V         | μF                                  | mA   | μA         | Ω        | at 10 kHz      | at 1 kHz |           |  |
| 6,3            | 10        | 14                                  | 5  | 0,30       | 47,8     | 20             |          | 1         | 030 .3109                              |
| 6,3            | 33        | 42                                  | 11   | 0,25       | 12,1     | 6,1            |          | 2         | 030 .3339                              |
| 6,3            | 68        | 53                                  | 22   | 0,25       | 5,86     | 2,9            |          | 2         | 030 .3689                              |
| 6,3            | 150       | 87                                  | 10   | 0,25       | 2,66     | 1,3            |          | 3         | 030 .3151                              |
| 6,3            | 470       | 220                                 | 22   | 0,25       | 0,85     | 0,43           |          | 5         | 031 .3471                              |
| 6,3            | 680       | 350                                 | 30   | 0,25       | 0,59     | 0,29           |          | 6         | 031 .3681                              |
| 6,3            | 1000      | 480                                 | 42   | 0,25       | 0,40     | 0,20           |          | 7         | 031 .3102                              |
| 6,3            | 1500      | 450                                 | 61   | 0,28       | 0,30     |                | 0,23     | 00        | 032 .3152                              |
| 6,3            | 2200      | 610                                 | 88   | 0,29       | 0,21     |                | 0,16     | 01        | 032 .3222                              |
| 6,3            | 3300      | 790                                 | 129  | 0,32       | 0,15     |                | 0,11     | 02        | 032 .3332                              |
| 6,3            | 4700      | 1000                                | 182  | 0,34       | 0,12     |                | 0,07     | 03        | 032 .3472                              |
| 6,3            | 6800      | 1280                                | 261  | 0,39       | 0,09     |                | 0,05     | 04        | 033 .3682                              |
| 6,3            | 10000     | 1570                                | 382  | 0,45       | 0,07     |                | 0,05     | 05        | 033 .3103                              |
| 6,3            | 15000     | 1600                                | 571  | 0,67       | 0,07     |                | 0,05     | 05        | 033 .3153                              |
| 10             | 6,8       | 14                                  | 5  | 0,25       | 58,6     | 24             |          | 1         | 030 .4688                              |
| 10             | 22        | 42                                  | 11   | 0,20       | 14,5     | 7,3            |          | 2         | 030 .4229                              |
| 10             | 47        | 53                                  | 24   | 0,20       | 6,78     | 3,4            |          | 2         | 030 .4479                              |
| 10             | 100       | 87                                  | 10   | 0,20       | 3,19     | 1,6            |          | 3         | 030 .4101                              |
| 10             | 220       | 150                                 | 18   | 0,20       | 1,45     | 0,73           |          | 5a        | 030 .4221                              |
| 10             | 220       | 150                                 | 18   | 0,20       | 1,45     | 0,73           |          | 4         | 031 .4221                              |
| 10             | 330       | 220                                 | 24   | 0,20       | 0,97     | 0,48           |          | 5         | 031 .4331                              |
| 10             | 470       | 350                                 | 33   | 0,20       | 0,68     | 0,34           |          | 6         | 031 .4471                              |
| 10             | 680       | 480                                 | 45   | 0,20       | 0,47     | 0,24           |          | 7         | 031 .4681                              |
| 10             | 1000      | 430                                 | 64   | 0,20       | 0,32     | 0,20           |          | 00        | 032 .4102                              |
| 10             | 1500      | 570                                 | 94   | 0,23       | 0,25     |                | 0,20     | 01        | 032 .4152                              |
| 10             | 2200      | 740                                 | 136  | 0,24       | 0,18     |                | 0,14     | 02        | 032 .4222                              |
| 10             | 3300      | 950                                 | 202  | 0,27       | 0,13     |                | 0,09     | 03        | 032 .4332                              |
| 10             | 4700      | 1220                                | 286  | 0,29       | 0,10     |                | 0,06     | 04        | 033 .4472                              |
| 10             | 6800      | 1500                                | 412  | 0,34       | 0,08     |                | 0,04     | 05        | 033 .4682                              |
| 10             | 10000     | 1520                                | 604  | 0,49       | 0,08     |                | 0,05     | 05        | 033 .4103                              |

\* Replace dot in catalogue number by:

- 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel (preferred for case sizes 1 to 4)  
 3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) } case sizes 1 to 7  
 4 for style 2, case sizes 02 to 05;  
 8 for style 3, case sizes 1 to 02.

2222 030  
 2222 031  
 2222 032  
 2222 033

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at 85 °C | max. d.c. leakage current at U <sub>R</sub> after 1 min. | max. tan δ | max. ESR | max. impedance |            | case size | catalogue number *<br>2222 followed by |
|----------------|-----------|-------------------------------------|--|------------|----------|----------------|------------|-----------|--|
|                |           |                                     |  |            |          | Ω at 10 kHz    | Ω at 1 kHz |           |  |
| V              | μF        | mA                                  | μA   |            | Ω        |                |            |           |  |
| 16             | 4,7       | 14                                  | 5  | 0,20       | 67,8     | 26             |            | 1         | 030 .5478                              |
| 16             | 15        | 42                                  | 12   | 0,16       | 17,0     | 8              |            | 2         | 030 .5159                              |
| 16             | 33        | 53                                  | 27   | 0,16       | 7,72     | 3,6            |            | 2         | 030 .5339                              |
| 16             | 68        | 87                                  | 11   | 0,16       | 3,75     | 1,8            |            | 3         | 030 .5689                              |
| 16             | 150       | 150                                 | 19   | 0,16       | 1,70     | 0,80           |            | 5a        | 030 .5151                              |
| 16             | 150       | 150                                 | 19   | 0,16       | 1,70     | 0,80           |            | 4         | 031 .5151                              |
| 16             | 220       | 220                                 | 26   | 0,16       | 1,16     | 0,55           |            | 5         | 031 .5221                              |
| 16             | 330       | 350                                 | 36   | 0,16       | 0,78     | 0,36           |            | 6         | 031 .5331                              |
| 16             | 470       | 480                                 | 49   | 0,16       | 0,55     | 0,26           |            | 7         | 031 .5471                              |
| 16             | 680       | 400                                 | 70   | 0,16       | 0,38     | 0,18           |            | 00        | 032 .5681                              |
| 16             | 1000      | 550                                 | 100  | 0,16       | 0,26     | 0,12           |            | 01        | 032 .5102                              |
| 16             | 1500      | 680                                 | 148  | 0,19       | 0,21     |                | 0,17       | 02        | 032 .5152                              |
| 16             | 2200      | 880                                 | 216  | 0,20       | 0,15     |                | 0,13       | 03        | 032 .5222                              |
| 16             | 3300      | 1160                                | 321  | 0,23       | 0,11     |                | 0,08       | 04        | 033 .5332                              |
| 16             | 4700      | 1430                                | 455  | 0,25       | 0,09     |                | 0,06       | 05        | 033 .5472                              |
| 16             | 6800      | 1460                                | 657  | 0,36       | 0,08     |                | 0,06       | 05        | 033 .5682                              |
| 25             | 3,3       | 13                                  | 5  | 0,18       | 86,9     | 27             |            | 1         | 030 .6338                              |
| 25             | 10        | 36                                  | 13   | 0,14       | 22,3     | 9              |            | 2         | 030 .6109                              |
| 25             | 22        | 43                                  | 28   | 0,14       | 10,2     | 4,1            |            | 2         | 030 .6229                              |
| 25             | 47        | 83                                  | 12   | 0,14       | 4,80     | 1,9            |            | 3         | 030 .6479                              |
| 25             | 100       | 120                                 | 19   | 0,14       | 2,23     | 0,90           |            | 5a        | 030 .6101                              |
| 25             | 100       | 120                                 | 19   | 0,14       | 2,23     | 0,90           |            | 4         | 031 .6101                              |
| 25             | 150       | 190                                 | 27   | 0,14       | 1,49     | 0,60           |            | 5         | 031 .6151                              |
| 25             | 220       | 280                                 | 37   | 0,14       | 1,02     | 0,41           |            | 6         | 031 .6221                              |
| 25             | 330       | 350                                 | 54   | 0,14       | 0,68     | 0,27           |            | 7         | 031 .6331                              |
| 25             | 470       | 360                                 | 75   | 0,14       | 0,47     | 0,19           |            | 00        | 032 .6471                              |
| 25             | 680       | 500                                 | 106  | 0,14       | 0,32     | 0,13           |            | 01        | 032 .6681                              |
| 25             | 1000      | 660                                 | 154  | 0,14       | 0,22     | 0,09           |            | 02        | 032 .6102                              |
| 25             | 1500      | 810                                 | 229  | 0,17       | 0,18     |                | 0,15       | 03        | 032 .6152                              |
| 25             | 2200      | 1060                                | 334  | 0,18       | 0,13     |                | 0,10       | 04        | 033 .6222                              |
| 25             | 3300      | 1340                                | 499  | 0,21       | 0,10     |                | 0,07       | 05        | 033 .6332                              |
| 25             | 4700      | 1370                                | 709  | 0,28       | 0,10     |                | 0,06       | 05        | 033 .6472                              |

\* Replace dot in catalogue number by:

- 1 for style 1, case sizes 00 to 05, supplied in box;
  - 2 for style 1 on bandoliers on reel (preferred for case sizes 1 to 4)
  - 3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7)
- } case sizes 1 to 7
- 4 for style 2, case sizes 02 to 05;
  - 8 for style 3, case sizes 1 to 02.

Aluminium electrolytic capacitors

2222 030  
2222 031  
2222 032  
2222 033

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at 85 °C | max. d.c. leakage current at U <sub>R</sub> after 1 min. | max. tan δ | max. ESR | max. impedance |            | case size | catalogue number *<br>2222 followed by |
|----------------|-----------|-------------------------------------|--|------------|----------|----------------|------------|-----------|--|
|                |           |                                     |  |            |          | Ω at 10 kHz    | Ω at 1 kHz |           |  |
| V              | μF        | mA                                  | μA   |            | Ω        |                |            |           |  |
| 40             | 2,2       | 13                                  | 5  | 0,15       | 109      | 32             |            | 1         | 030.7228                               |
| 40             | 6,8       | 36                                  | 14   | 0,11       | 25,8     | 10             |            | 2         | 030.7688                               |
| 40             | 10        | 38                                  | 20   | 0,11       | 17,6     | 7              |            | 2         | 030.7109                               |
| 40             | 15        | 43                                  | 30   | 0,11       | 11,7     | 4,7            |            | 2         | 030.7159                               |
| 40             | 22        | 61                                  | 9  | 0,11       | 8,0      | 3,2            |            | 3         | 030.7229                               |
| 40             | 33        | 83                                  | 12   | 0,11       | 5,31     | 2,1            |            | 3         | 030.7339                               |
| 40             | 47        | 120                                 | 16   | 0,11       | 3,73     | 1,5            |            | 5a        | 030.7479                               |
| 40             | 47        | 120                                 | 16   | 0,11       | 3,73     | 1,5            |            | 4         | 031.7479                               |
| 40             | 100       | 190                                 | 28   | 0,11       | 1,75     | 0,70           |            | 5         | 031.7101                               |
| 40             | 150       | 280                                 | 40   | 0,11       | 1,17     | 0,47           |            | 6         | 031.7151                               |
| 40             | 220       | 430                                 | 57   | 0,11       | 0,80     | 0,32           |            | 7         | 031.7221                               |
| 40             | 220       | 260                                 | 57   | 0,12       | 0,86     | 0,32           |            | 00        | 032.7221                               |
| 40             | 330       | 370                                 | 84   | 0,12       | 0,58     | 0,21           |            | 01        | 032.7331                               |
| 40             | 470       | 440                                 | 117  | 0,12       | 0,40     | 0,15           |            | 01        | 032.7471                               |
| 40             | 680       | 580                                 | 167  | 0,12       | 0,28     | 0,10           |            | 02        | 032.7681                               |
| 40             | 1000      | 780                                 | 244  | 0,12       | 0,19     | 0,07           |            | 03        | 032.7102                               |
| 40             | 1500      | 970                                 | 364  | 0,15       | 0,16     |                | 0,13       | 04        | 033.7152                               |
| 40             | 2200      | 1220                                | 532  | 0,16       | 0,12     |                | 0,09       | 05        | 033.7222                               |
| 40             | 3300      | 1284                                | 796  | 0,24       | 0,11     |                | 0,07       | 05        | 033.7332                               |
| 63             | 0,33      | 5                                   | 5  | 0,09       | 435      | 167            |            | 2         | 030.8337                               |
| 63             | 0,47      | 8                                   | 5  | 0,09       | 305      | 117            |            | 2         | 030.8477                               |
| 63             | 0,68      | 10                                  | 5  | 0,09       | 211      | 81             |            | 2         | 030.8687                               |
| 63             | 1,0       | 12                                  | 5  | 0,09       | 143      | 55             |            | 2         | 030.8108                               |
| 63             | 1,5       | 12                                  | 5  | 0,09       | 95,6     | 37             |            | 2         | 030.8158                               |
| 63             | 2,2       | 21                                  | 7  | 0,09       | 65,2     | 25             |            | 2         | 030.8228                               |
| 63             | 3,3       | 25                                  | 11   | 0,09       | 46,5     | 17             |            | 2         | 030.8338                               |
| 63             | 4,7       | 31                                  | 15   | 0,09       | 30,5     | 12             |            | 2         | 030.8478                               |
| 63             | 6,8       | 35                                  | 22   | 0,09       | 21,1     | 8,1            |            | 2         | 030.8688                               |
| 63             | 10        | 51                                  | 7  | 0,08       | 12,8     | 5,5            |            | 3         | 030.8109                               |
| 63             | 15        | 61                                  | 10   | 0,08       | 8,5      | 3,7            |            | 3         | 030.8159                               |
| 63             | 22        | 90                                  | 13   | 0,08       | 5,79     | 2,5            |            | 5a        | 030.8229                               |
| 63             | 22        | 90                                  | 13   | 0,08       | 5,79     | 2,5            |            | 4         | 031.8229                               |
| 63             | 47        | 120                                 | 22   | 0,08       | 2,71     | 1,2            |            | 5         | 031.8479                               |
| 63             | 68        | 200                                 | 30   | 0,08       | 1,88     | 0,81           |            | 6         | 031.8689                               |
| 63             | 100       | 260                                 | 42   | 0,08       | 1,28     | 0,55           |            | 7         | 031.8101                               |
| 63             | 150       | 260                                 | 61   | 0,08       | 0,90     | 0,37           |            | 00        | 032.8151                               |
| 63             | 220       | 350                                 | 88   | 0,08       | 0,61     | 0,25           |            | 01        | 032.8221                               |
| 63             | 330       | 480                                 | 129  | 0,08       | 0,41     | 0,17           |            | 02        | 032.8331                               |
| 63             | 470       | 570                                 | 182  | 0,08       | 0,29     | 0,15           |            | 02        | 032.8471                               |
| 63             | 680       | 770                                 | 261  | 0,08       | 0,20     | 0,08           |            | 03        | 032.8681                               |
| 63             | 1000      | 1140                                | 382  | 0,08       | 0,14     | 0,06           |            | 05        | 033.8102                               |
| 63             | 1500      | 1110                                | 571  | 0,12       | 0,15     |                | 0,15       | 05        | 033.8152                               |

\* See footnote on the opposite page.

2222 030  
 2222 031  
 2222 032  
 2222 033

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at 85 °C | max. d.c. leakage current at U <sub>R</sub> after 1 min. | max. tan δ | max. ESR | max. impedance |          | case size | catalogue number *<br>2222 followed by |
|----------------|-----------|-------------------------------------|--|------------|----------|----------------|----------|-----------|--|
|                |           |                                     |  |            |          | at 10 kHz      | at 1 kHz |           |  |
| V              | μF        | mA                                  | μA   |            | Ω        |                | Ω        |           |  |
| 100            | 1,0       | 14                                  | 5  | 0,08       | 128      | 45             |          | 2         | 030 .9108                              |
| 100            | 2,2       | 25                                  | 11   | 0,08       | 57,9     | 21             |          | 2         | 030 .9228                              |
| 100            | 3,3       | 35                                  | 17   | 0,08       | 38,6     | 14             |          | 2         | 030 .9338                              |
| 100            | 4,7       | 38                                  | 22   | 0,07       | 23,7     | 9,6            |          | 3         | 030 .9478                              |
| 100            | 6,8       | 61                                  | 34   | 0,07       | 16,4     | 6,6            |          | 3         | 030 .9688                              |
| 100            | 10        | 90                                  | 50   | 0,07       | 11,2     | 4,5            |          | 5a        | 030 .9109                              |
| 100            | 10        | 90                                  | 50   | 0,07       | 11,2     | 4,5            |          | 4         | 031 .9109                              |
| 100            | 22        | 120                                 | 80   | 0,07       | 5,07     | 2,1            |          | 5         | 031 .9229                              |
| 100            | 33        | 200                                 | 119  | 0,07       | 3,38     | 1,4            |          | 6         | 031 .9339                              |
| 100            | 47        | 260                                 | 33   | 0,07       | 2,37     | 0,96           |          | 7         | 031 .9479                              |
| 100            | 68        | 130                                 | 45   | 0,15       | 3,53     | 2,0            |          | 00        | 032 .9689                              |
| 100            | 100       | 190                                 | 64   | 0,15       | 2,40     | 1,2            |          | 01        | 032 .9101                              |
| 100            | 150       | 250                                 | 94   | 0,15       | 1,60     | 0,85           |          | 02        | 032 .9151                              |
| 100            | 220       | 330                                 | 136  | 0,15       | 1,09     | 0,60           |          | 03        | 032 .9221                              |
| 100            | 330       | 460                                 | 202  | 0,15       | 0,73     | 0,50           |          | 04        | 033 .9331                              |
| 100            | 470       | 600                                 | 286  | 0,15       | 0,51     | 0,35           |          | 05        | 033 .9471                              |
| 100            | 680       | 650                                 | 412  | 0,15       | 0,42     | 0,35           |          | 05        | 033 .9681                              |

\* Replace dot in catalogue number by:

1 for style 1, case sizes 00 to 05, supplied in box;

2 for style 1 on bandoliers on reel (preferred for case sizes 1 to 4) } case sizes 1 to 7

3 for style 1 on bandoliers in box (preferred for case sizes 5a to 7) }

→ 4 for style 2, case sizes 02 to 05;

8 for style 3, case sizes 1 to 02.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50%

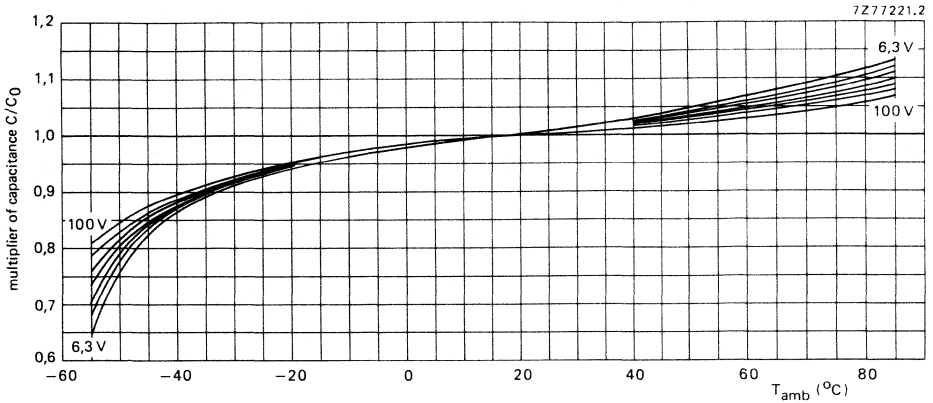


Fig. 4 Multiplier of capacitance as a function of ambient temperature; case sizes 1 to 7;  $C_0$  = capacitance at 20 °C, 100 Hz.

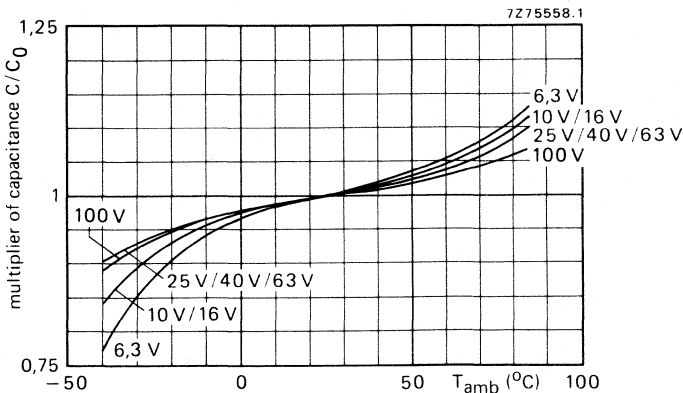


Fig. 5 Multiplier of capacitance as a function of ambient temperature; case sizes 00 to 05;  $C_0$  = capacitance at 25 °C, 100 Hz.

2222 030  
 2222 031  
 2222 032  
 2222 033

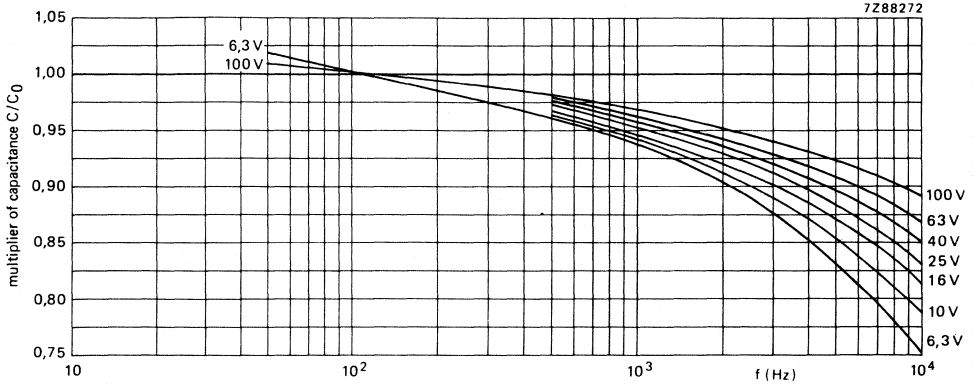


Fig. 6 Multiplier of capacitance as a function of frequency; case sizes 1 to 7;  $C_0$  = capacitance at 20 °C, 100 Hz.

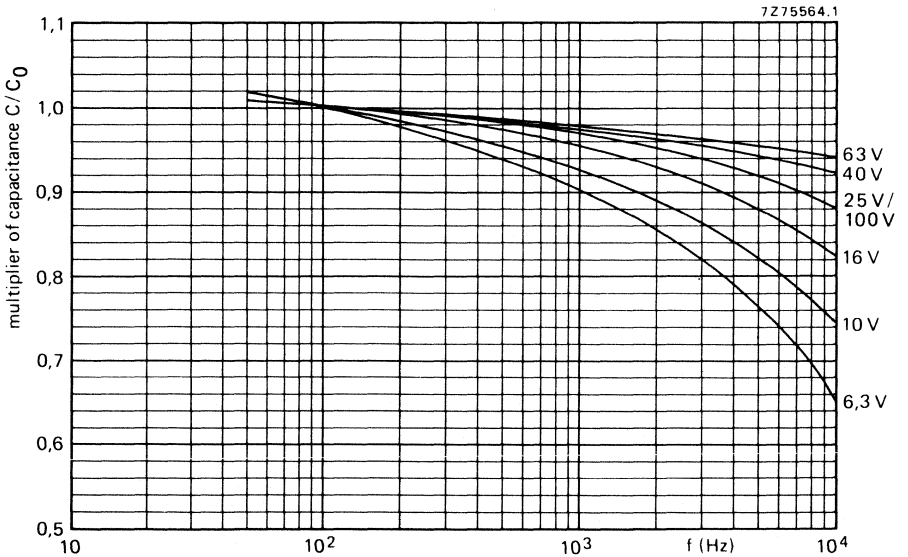


Fig. 7 Multiplier of capacitance as a function of frequency; case sizes 00 to 05;  $C_0$  = capacitance at 25 °C, 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

| core temperature ▲              |                |
|---------------------------------|----------------|
| < 60 °C                         | 60 to 95 °C    |
| 1,1 x U <sub>R</sub>            | U <sub>R</sub> |
| 1,1 x U <sub>R</sub>            | U <sub>R</sub> |
| 1 V                             |                |
| between U <sub>R</sub> and -1 V |                |
| 1,15 x U <sub>R</sub>           |                |
| 1 V                             |                |

**Ripple current \*\***

Maximum permissible r.m.s. ripple current at

100 Hz and T<sub>amb</sub> = 85 °C

100 Hz and T<sub>amb</sub> = 40 °C

see Table 2

2,24 x values stated in Table 2

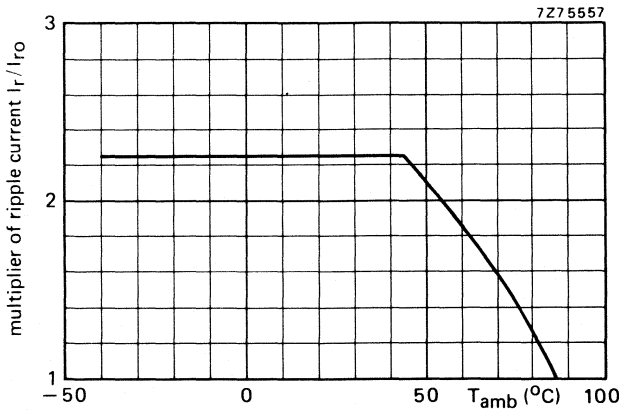


Fig. 8 Multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

2222 030  
 2222 031  
 2222 032  
 2222 033

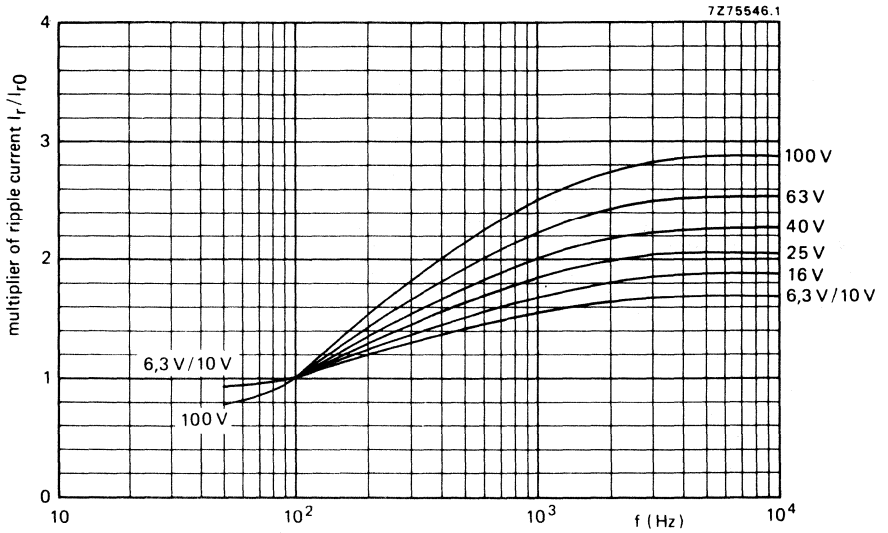


Fig. 9 Multiplier of ripple current as a function of frequency, **case sizes 1 to 7**;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

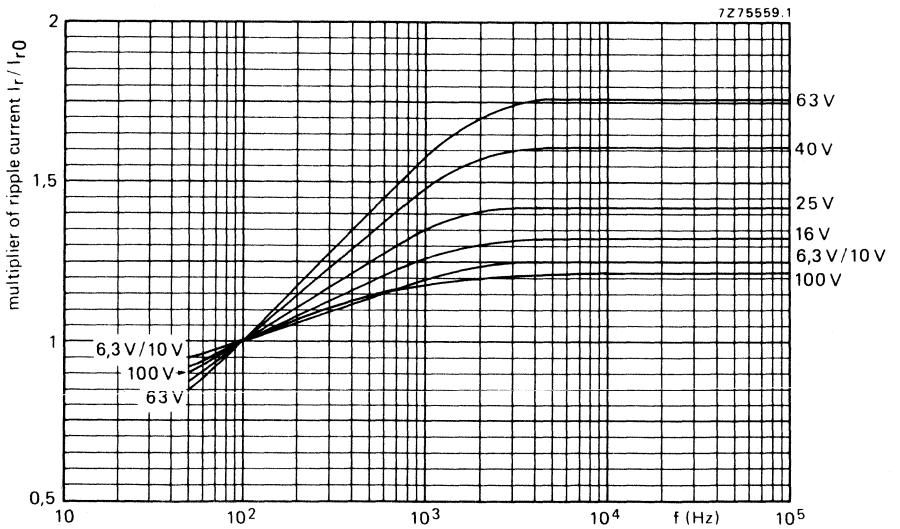


Fig. 10 Multiplier of ripple current as a function of frequency, **case sizes 00 to 03**;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.



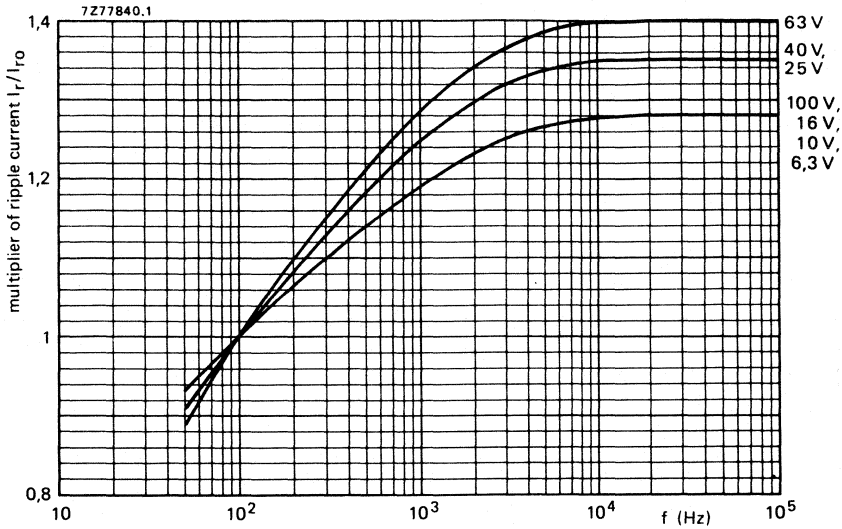


Fig. 11 Multiplier of ripple current as a function of frequency, case sizes 04 and 05;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$ , at  $T_{amb} = 20\text{ }^\circ\text{C}$ .  
 case sizes 1 and 2

see Table 2 (0,05 CU or  $5\text{ }\mu\text{A}$ , whichever is greater)

case sizes 3 to 7 and 00 to 05

see Table 2 (0,006 CU +  $4\text{ }\mu\text{A}$  for  $\text{CU} > 1000\text{ }\mu\text{C}$ ;  $0,01\text{ CU}$  or  $1\text{ }\mu\text{A}$ , whichever is greater for  $\text{CU} \leq 1000\text{ }\mu\text{C}$ )

D.C. leakage current during continuous operation at  $U_R$   
 at  $T_{amb} = 20\text{ }^\circ\text{C}$ , case sizes 1 to 7  
 at  $T_{amb} = 20\text{ }^\circ\text{C}$ , case sizes 00 to 05  
 at  $T_{amb} = 85\text{ }^\circ\text{C}$

approx. 0,1 x values of Table 2  
 approx. 0,01 x values of Table 2  
 $\leq$  values of Table 2

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

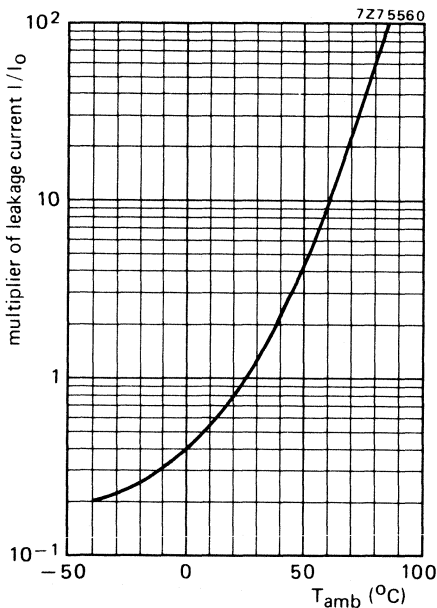


Fig. 12 Multiplier of d.c. leakage current as a function of ambient temperature, **cases sizes 00 to 05**;  $I_0$  = d.c. leakage current during continuous operation at  $25\text{ }^\circ\text{C}$  and  $U_R$ .

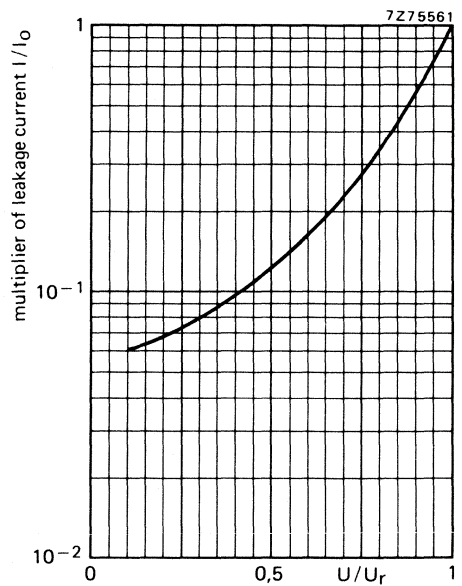


Fig. 13 Multiplier of d.c. leakage current as a function of  $U/U_R$ , **case sizes 00 to 05**;  $I_0$  = d.c. leakage current during continuous operation at  $25\text{ }^\circ\text{C}$  and  $U_R$ .

**Tan  $\delta$**  (dissipation factor)

Maximum  $\tan \delta$  at 100 Hz and  $T_{amb} = 25^\circ\text{C}$ ,  
 measured by means of a four-terminal  
 circuit (Thomson circuit)

see Table 2

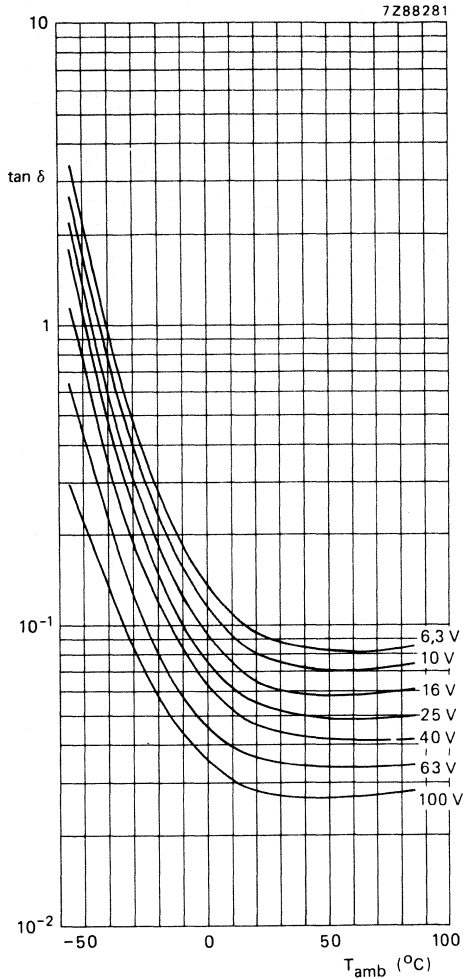


Fig. 14 Typical  $\tan \delta$  as a function of ambient temperature at 100 Hz; case sizes 1 to 7.

2222 030  
2222 031  
2222 032  
2222 033

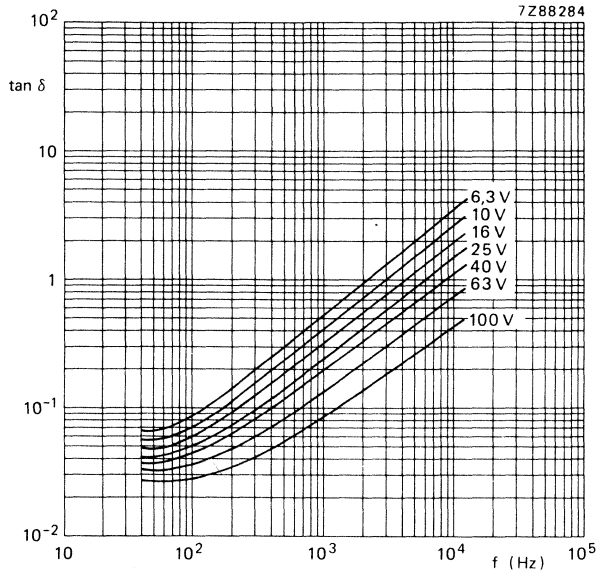


Fig. 15 Typical  $\tan \delta$  as a function of frequency at 25 °C, case sizes 1 to 7.

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ °C}$ , measured by means of a four-terminal circuit (Thomson Circuit) see Table 2  
( $ESR = \tan \delta / \omega C$ )

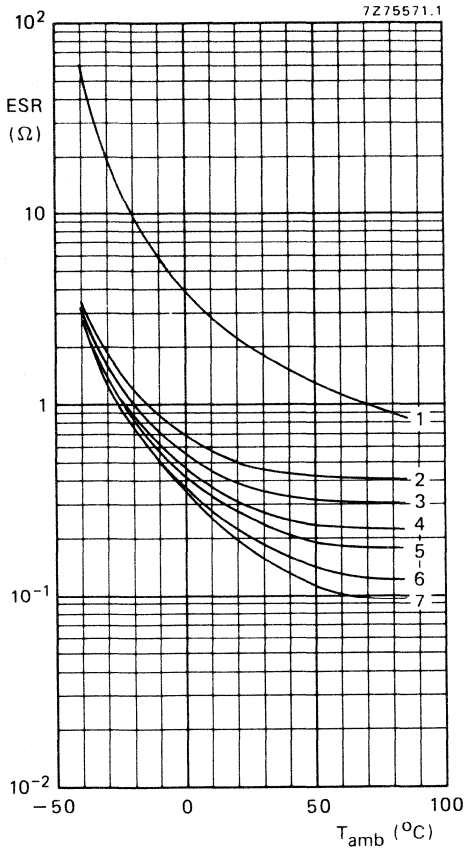


Fig. 16 Typical ESR as a function of ambient temperature at 100 Hz.

**Case size 00:**

- curve 1 = 68  $\mu\text{F}$ , 100 V;
- curve 2 = 150  $\mu\text{F}$ , 63 V;
- curve 3 = 220  $\mu\text{F}$ , 40 V;
- curve 4 = 470  $\mu\text{F}$ , 25 V;
- curve 5 = 680  $\mu\text{F}$ , 16 V;
- curve 6 = 1000  $\mu\text{F}$ , 10 V;
- curve 7 = 1500  $\mu\text{F}$ , 6,3 V.

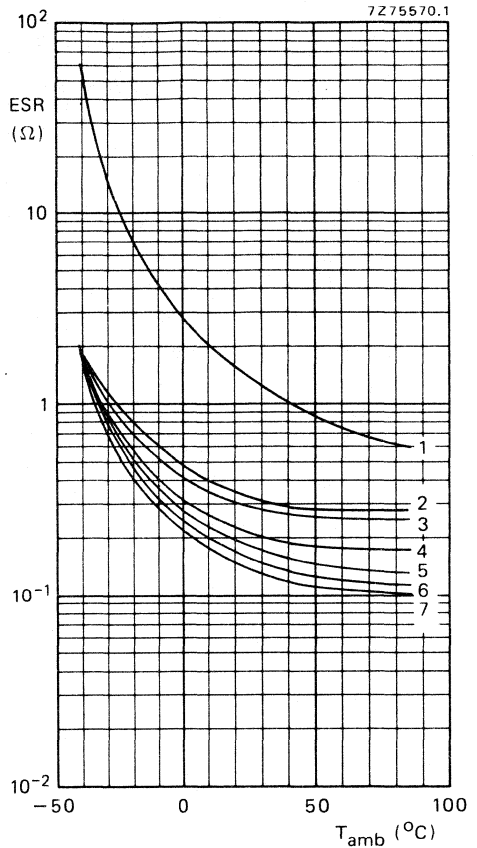


Fig. 17 Typical ESR as a function of ambient temperature at 100 Hz.

**Case size 01:**

- curve 1 = 100  $\mu\text{F}$ , 100 V;
- curve 2 = 220  $\mu\text{F}$ , 63 V;
- curve 3 = 330  $\mu\text{F}$ , 40 V;
- curve 4 = 470  $\mu\text{F}$ , 40 V;
- curve 5 = 680  $\mu\text{F}$ , 25 V;
- curve 6 = 1000  $\mu\text{F}$ , 16 V;
- curve 7 = 1500  $\mu\text{F}$ , 10 V and 2200  $\mu\text{F}$ , 6,3 V.

2222 030  
 2222 031  
 2222 032  
 2222 033

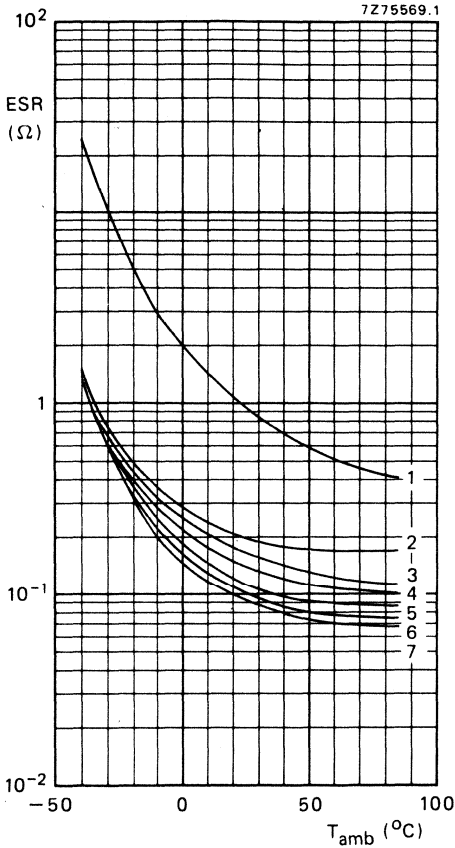


Fig. 18 Typical ESR as a function of ambient temperature at 100 Hz.

**Case size 02:**

- curve 1 = 150  $\mu\text{F}$ , 100 V;
- curve 2 = 330  $\mu\text{F}$ , 63 V;
- curve 3 = 470  $\mu\text{F}$ , 63 V;
- curve 4 = 680  $\mu\text{F}$ , 40 V;
- curve 5 = 1000  $\mu\text{F}$ , 25 V;
- curve 6 = 1500  $\mu\text{F}$ , 16 V;
- curve 7 = 2200  $\mu\text{F}$ , 10 V and 3300  $\mu\text{F}$ , 6,3 V.

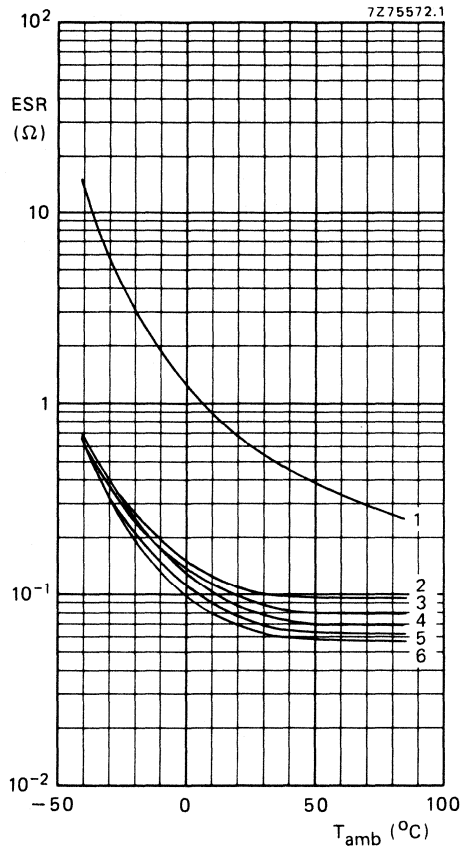


Fig. 19 Typical ESR as a function of ambient temperature at 100 Hz.

**Case size 03:**

- curve 1 = 220  $\mu\text{F}$ , 100 V;
- curve 2 = 680  $\mu\text{F}$ , 63 V;
- curve 3 = 1000  $\mu\text{F}$ , 40 V;
- curve 4 = 1500  $\mu\text{F}$ , 25 V;
- curve 5 = 2200  $\mu\text{F}$ , 16 V;
- curve 6 = 3300  $\mu\text{F}$ , 10 V and 4700  $\mu\text{F}$ , 6,3 V.

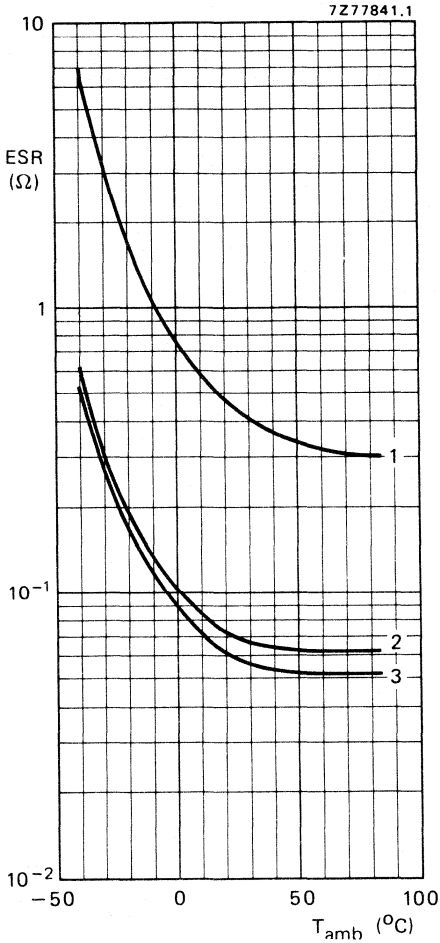


Fig. 20 Typical ESR as a function of ambient temperature at 100 Hz.

**Case size 04:**

- curve 1 = 330  $\mu F$ , 100 V;
- curve 2 = 1500  $\mu F$ , 40 V and 2200  $\mu F$ , 25 V;
- curve 3 = 3300  $\mu F$ , 16 V, 4700  $\mu F$ , 10 V and 6800  $\mu F$ , 6,3 V.

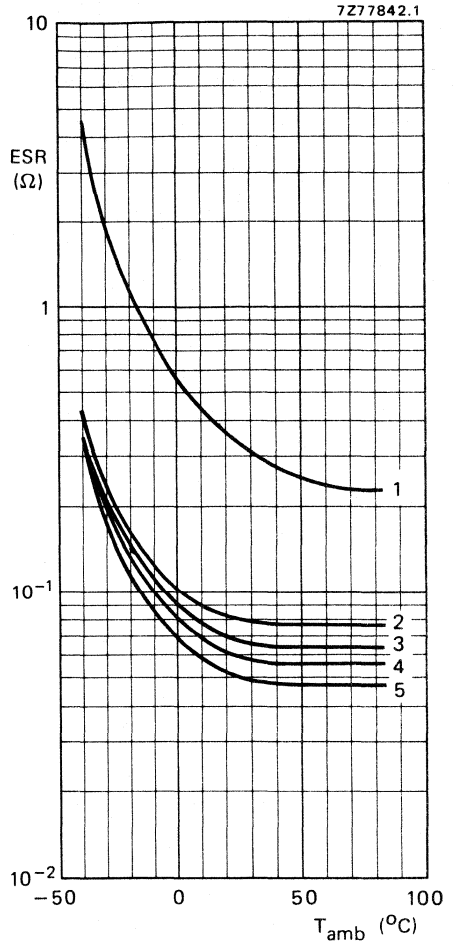


Fig. 21 Typical ESR as a function of ambient temperature at 100 Hz.

**case size 05:**

- curve 1 = 470  $\mu F$ , 100 V and 680  $\mu F$ , 100 V;
- curve 2 = 1000  $\mu F$ , 63 V;
- curve 3 = 1500  $\mu F$ , 63 V;
- curve 4 = 2200  $\mu F$ , 40 V and 3300  $\mu F$ , 25 V;
- curve 5 = 4700  $\mu F$ , 16 V, 6800  $\mu F$ , 10 V, 10 000  $\mu F$ , 6,3 V and 15 000  $\mu F$ , 6,3 V.

2222 030  
 2222 031  
 2222 032  
 2222 033

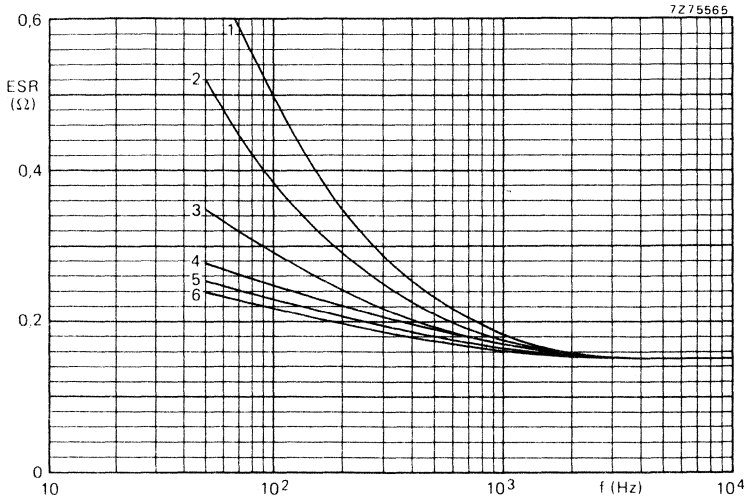


Fig. 22 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 00:

curve 1 = 150  $\mu$ F, 63 V;  
 curve 2 = 220  $\mu$ F, 40 V;

curve 3 = 470  $\mu$ F, 25 V;  
 curve 4 = 680  $\mu$ F, 16 V;

curve 5 = 1000  $\mu$ F, 10 V;  
 curve 6 = 1500  $\mu$ F, 6,3 V.

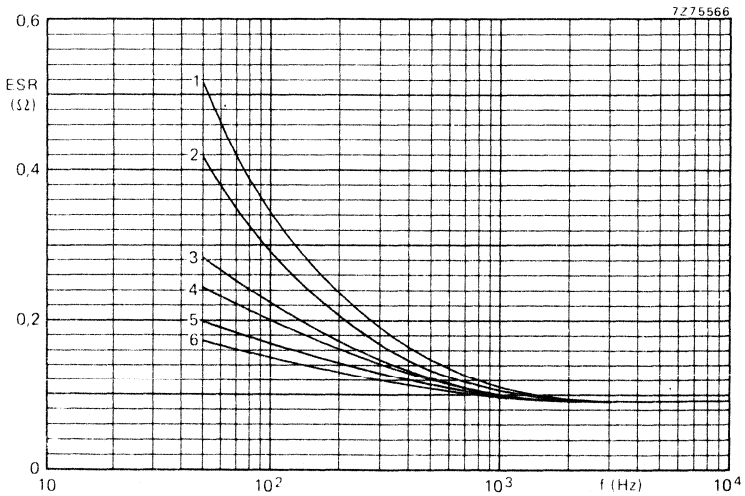


Fig. 23 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 01:

curve 1 = 220  $\mu$ F, 63 V;  
 curve 2 = 330  $\mu$ F, 40 V;

curve 3 = 470  $\mu$ F, 40 V;  
 curve 4 = 680  $\mu$ F, 25 V;

curve 5 = 1000  $\mu$ F, 16 V;  
 curve 6 = 1500  $\mu$ F, 10 V;  
 and 2200  $\mu$ F, 6,3 V.



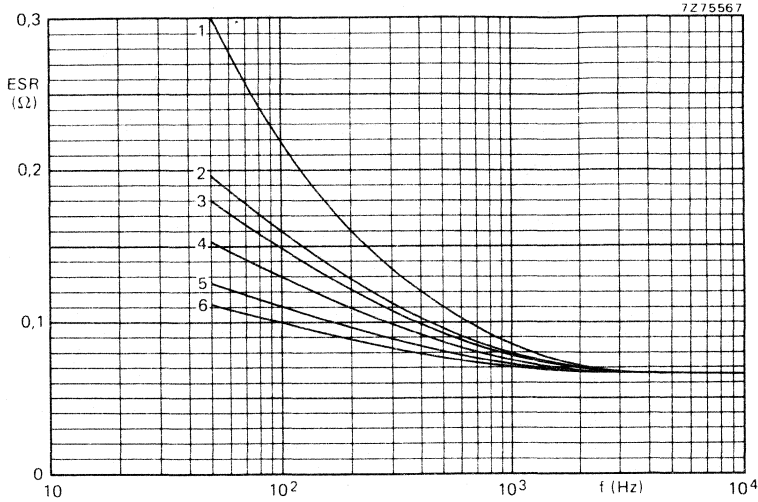


Fig. 24 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 02:

|                              |                               |                               |
|------------------------------|-------------------------------|-------------------------------|
| curve 1 = 330 $\mu$ F, 63 V; | curve 3 = 680 $\mu$ F, 40 V;  | curve 5 = 1500 $\mu$ F, 16 V; |
| curve 2 = 470 $\mu$ F, 63 V; | curve 4 = 1000 $\mu$ F, 25 V; | curve 6 = 2200 $\mu$ F, 10 V; |
|                              |                               | and 3300 $\mu$ F, 6,3 V.      |

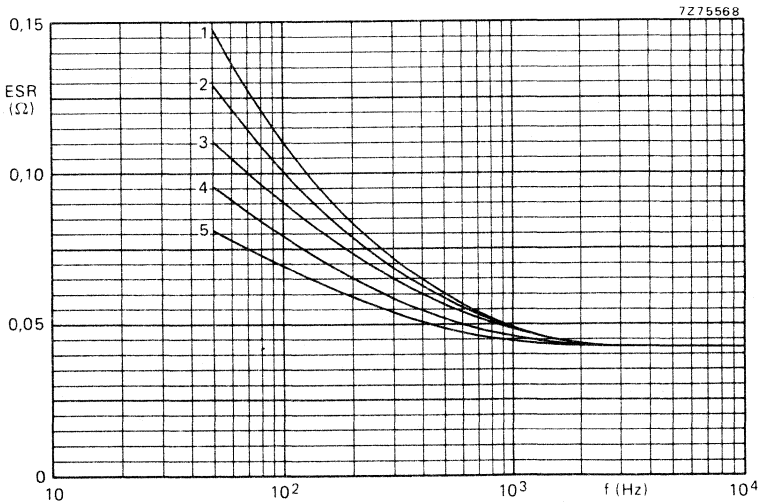


Fig. 25 Typical ESR as a function of frequency at 25 °C. 6,3 to 63 V versions, case size 03:

|                               |                               |                               |
|-------------------------------|-------------------------------|-------------------------------|
| curve 1 = 680 $\mu$ F, 63 V;  | curve 3 = 1500 $\mu$ F, 25 V; | curve 5 = 3300 $\mu$ F, 10 V; |
| curve 2 = 1000 $\mu$ F, 40 V; | curve 4 = 2200 $\mu$ F, 16 V; | and 4700 $\mu$ F, 6,3 V.      |

2222 030  
2222 031  
2222 032  
2222 033

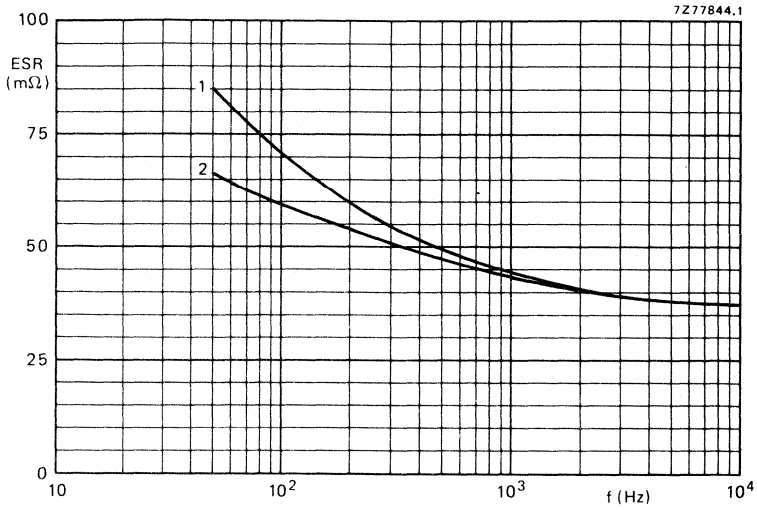


Fig. 26 Typical ESR as a function of frequency at 25 °C. **Case size 04:** curve 1 = 1500  $\mu\text{F}$ , 40 V and 2200  $\mu\text{F}$ , 25 V; curve 2 = 3300  $\mu\text{F}$ , 16 V, 4700  $\mu\text{F}$ , 10 V and 6800  $\mu\text{F}$ , 6,3 V.

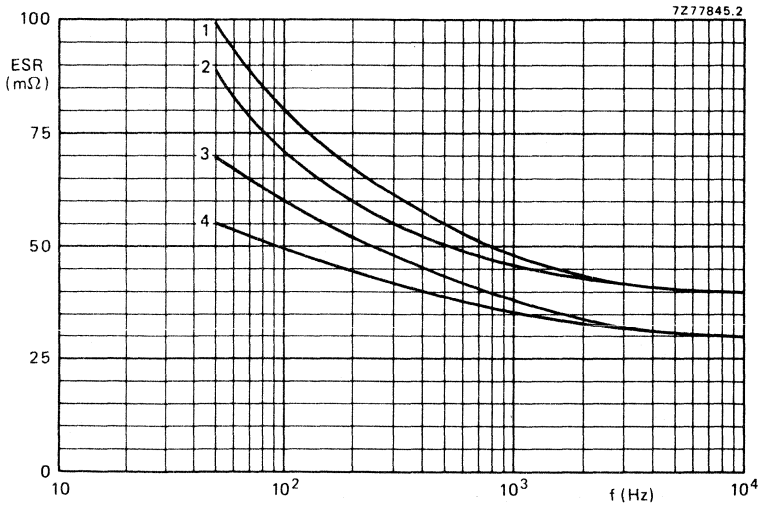


Fig. 27 Typical ESR as a function of frequency at 25 °C. **Case size 05:** curve 1 = 1000  $\mu\text{F}$ , 63 V; curve 2 = 1500  $\mu\text{F}$ , 63 V; curve 3 = 2200  $\mu\text{F}$ , 40 V and 3300  $\mu\text{F}$ , 25 V; curve 4 = 4700  $\mu\text{F}$ , 16 V, 6800  $\mu\text{F}$ , 10 V, 10 000  $\mu\text{F}$  and 15 000  $\mu\text{F}$ , 6,3 V.

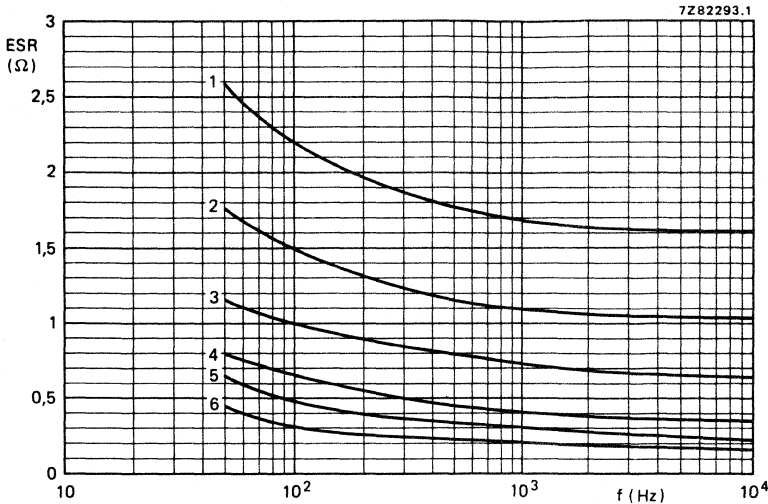


Fig. 28 Typical ESR as a function of frequency at 25 °C; 100 V version:  
 curve 1 = 68  $\mu$ F, case size 00;  
 curve 2 = 100  $\mu$ F, case size 01;  
 curve 3 = 150  $\mu$ F, case size 02;  
 curve 4 = 220  $\mu$ F, case size 03;  
 curve 5 = 330  $\mu$ F, case size 04;  
 curve 6 = 470  $\mu$ F and 680  $\mu$ F, case size 05.

**Impedance (Z)**

Maximum impedance at  $T_{amb} = 20$  °C and 1 kHz or 10 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

$z = Z \times C_{nom}$ , at 10 kHz

see Table 3

$z = Z \times C_{nom}$ , at 1 kHz

see Table 4

**Table 3**

| $T_{amb}$ | $z = Z \times C_{nom}$ ( $\Omega \mu$ F) at $U_R$ ; at 10 kHz |           |           |           |           |          |          |
|-----------|---|-----------|-----------|-----------|-----------|----------|----------|
|           | 6,3 V   | 10 V      | 16 V      | 25 V      | 40 V      | 63 V     | 100 V    |
| + 20 °C   | ≤ 200   | ≤ 160     | ≤ 120     | ≤ 90      | ≤ 70      | ≤ 55     | ≤ 45     |
| -25 °C    | ≤ 1200  | ≤ 750     | ≤ 560     | ≤ 400     | ≤ 300     | ≤ 180    | ≤ 130    |
| -40 °C    | ≤ 3200  | ≤ 2000    | ≤ 1500    | ≤ 1100    | ≤ 900     | ≤ 500    | ≤ 350    |
| -55 °C*   | typ. 6500   | typ. 5000 | typ. 3300 | typ. 2400 | typ. 1500 | typ. 850 | typ. 500 |

**Table 4**

| $T_{amb}$ | $z = Z \times C_{nom}$ ( $\Omega \mu$ F) at $U_R$ ; at 1 kHz |        |        |        |        |       |       |
|-----------|--|--------|--------|--------|--------|-------|-------|
|           | 6,3 V  | 10 V   | 16 V   | 25 V   | 40 V   | 63 V  | 100 V |
| +20 °C    | ≤ 350  | ≤ 300  | ≤ 250  | ≤ 220  | ≤ 200  | ≤ 180 | ≤ 175 |
| -25 °C    | ≤ 1700   | ≤ 1100 | ≤ 800  | ≤ 570  | ≤ 430  | ≤ 330 | ≤ 300 |
| -40 °C    | ≤ 4500   | ≤ 2800 | ≤ 2000 | ≤ 1400 | ≤ 1100 | ≤ 800 | ≤ -   |

\* For case sizes 1 to 7 only.

2222 030  
 2222 031  
 2222 032  
 2222 033

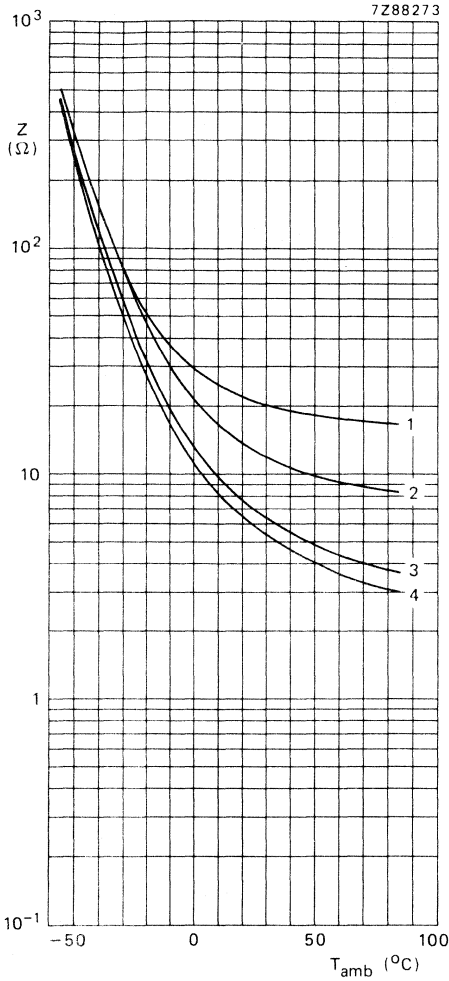


Fig. 29 Typical impedance as a function of ambient temperature at 10 kHz; **case size 1:**

curve 1 = 1  $\mu$ F, 63 V;  
 curve 2 = 2,2  $\mu$ F, 40 V;  
 curve 3 = 4,7  $\mu$ F, 16 V;  
 curve 4 = 10  $\mu$ F, 6,3 V.

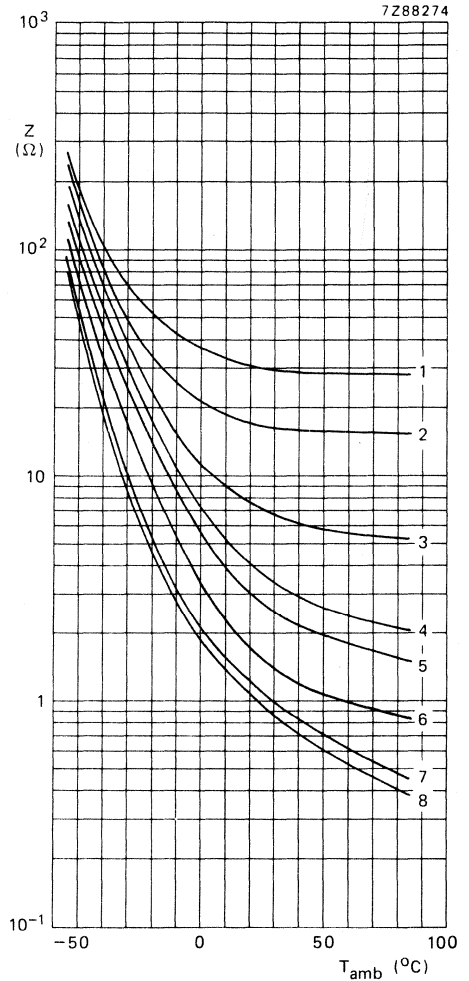


Fig. 30 Typical impedance as a function of ambient temperature at 10 kHz; **case size 2:**

curve 1 = 0,47  $\mu$ F, 63 V;  
 curve 2 = 1  $\mu$ F, 63 V;  
 curve 3 = 3,3  $\mu$ F, 63 V;  
 curve 4 = 6,8  $\mu$ F, 63 V;  
 curve 5 = 10  $\mu$ F, 25 V;  
 curve 6 = 22  $\mu$ F, 25 V;  
 curve 7 = 47  $\mu$ F, 10 V;  
 curve 8 = 68  $\mu$ F, 6,3 V.

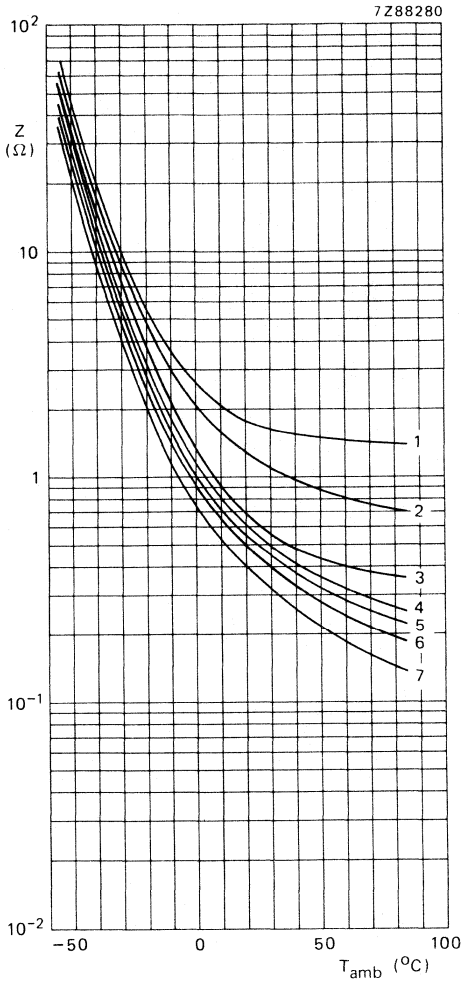


Fig. 31 Typical impedance as a function of ambient temperature at 10 kHz; **case size 3:**

- curve 1 = 4,7  $\mu$ F, 100 V;
- curve 2 = 10  $\mu$ F, 63 V;
- curve 3 = 22  $\mu$ F, 40 V;
- curve 4 = 47  $\mu$ F, 25 V;
- curve 5 = 68  $\mu$ F, 16 V;
- curve 6 = 100  $\mu$ F, 10 V;
- curve 7 = 150  $\mu$ F, 6,3 V.

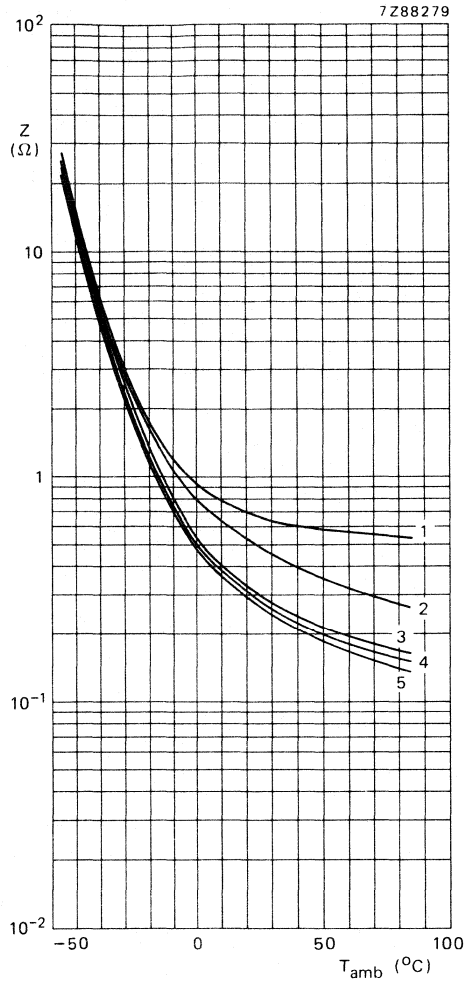


Fig. 32 Typical impedance as a function of ambient temperature at 10 kHz; **case size 5a:**

- curve 1 = 22  $\mu$ F, 63 V;
- curve 2 = 47  $\mu$ F, 40 V;
- curve 3 = 100  $\mu$ F, 25 V;
- curve 4 = 150  $\mu$ F, 16 V;
- curve 5 = 220  $\mu$ F, 10 V.

2222 030  
2222 031  
2222 032  
2222 033

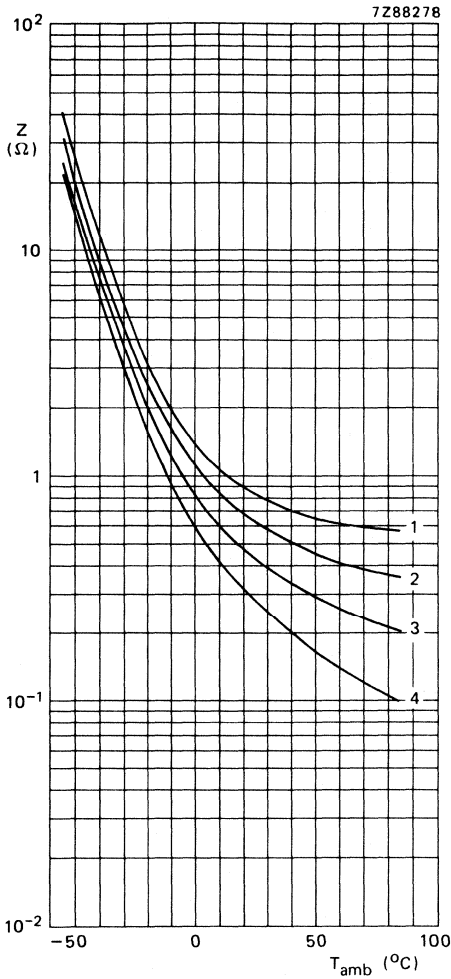


Fig. 33 Typical impedance as a function of ambient temperature at 10 kHz; case size 4:

curve 1 = 22  $\mu F$ , 63 V;  
curve 2 = 47  $\mu F$ , 40 V;  
curve 3 = 100  $\mu F$ , 25 V;  
curve 4 = 220  $\mu F$ , 10 V.

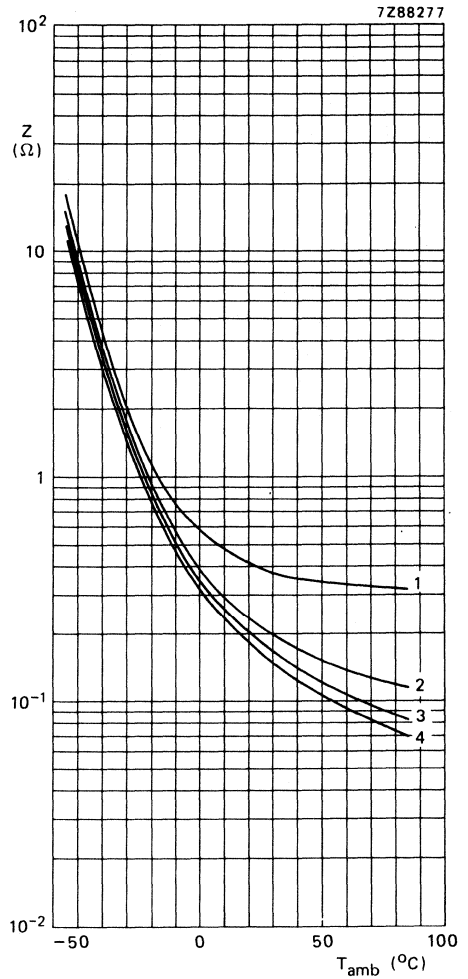


Fig. 34 Typical impedance as a function of ambient temperature at 10 kHz; case size 5:

curve 1 = 47  $\mu F$ , 63 V;  
curve 2 = 150  $\mu F$ , 25 V;  
curve 3 = 330  $\mu F$ , 10 V;  
curve 4 = 470  $\mu F$ , 6,3 V.

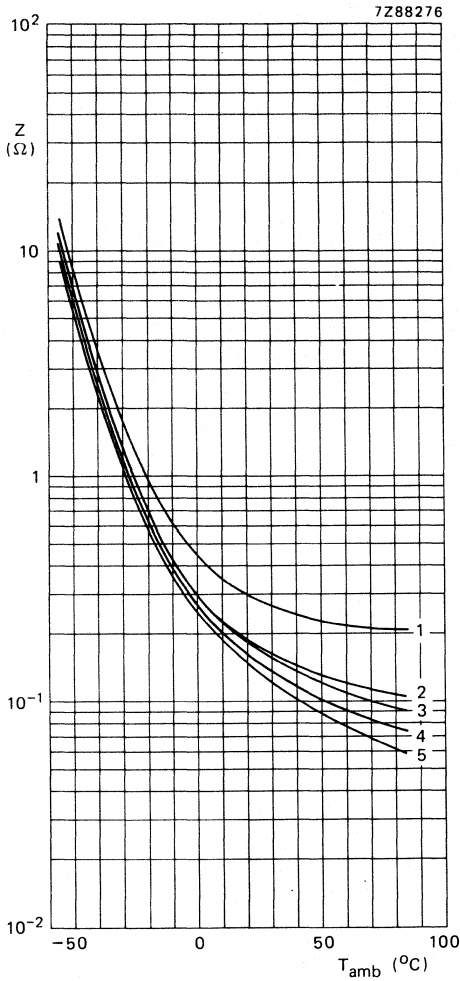


Fig. 35 Typical impedance as a function of ambient temperature at 10 kHz; **case size 6:**

- curve 1 = 68  $\mu\text{F}$ , 63 V;
- curve 2 = 150  $\mu\text{F}$ , 40 V;
- curve 3 = 220  $\mu\text{F}$ , 25 V;
- curve 4 = 330  $\mu\text{F}$ , 16 V;
- curve 5 = 680  $\mu\text{F}$ , 6,3 V.

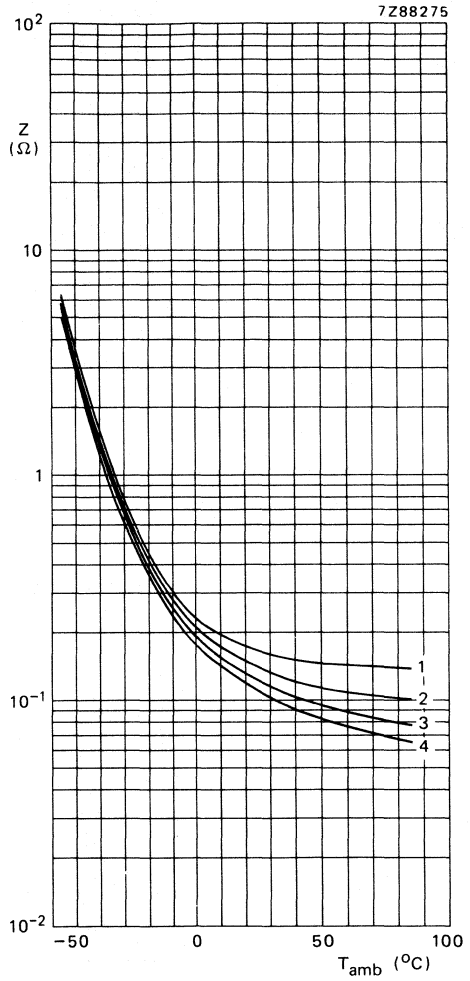


Fig. 36 Typical impedance as a function of ambient temperature at 10 kHz; **case size 7:**

- curve 1 = 100  $\mu\text{F}$ , 63 V;
- curve 2 = 220  $\mu\text{F}$ , 40 V;
- curve 3 = 470  $\mu\text{F}$ , 16 V;
- curve 4 = 1000  $\mu\text{F}$ , 6,3 V.





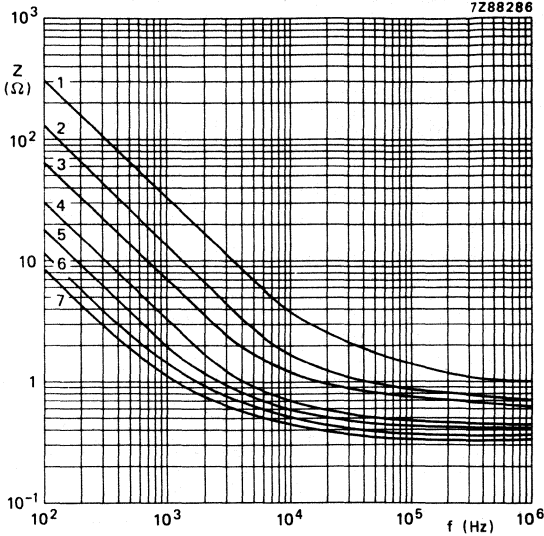


Fig. 39 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 3:  
 curve 1 = 4,7  $\mu\text{F}$ , 100 V; curve 5 = 68  $\mu\text{F}$ , 16 V;  
 curve 2 = 10  $\mu\text{F}$ , 63 V; curve 6 = 100  $\mu\text{F}$ , 10 V;  
 curve 3 = 22  $\mu\text{F}$ , 40 V; curve 7 = 150  $\mu\text{F}$ , 6,3 V.  
 curve 4 = 47  $\mu\text{F}$ , 25 V;

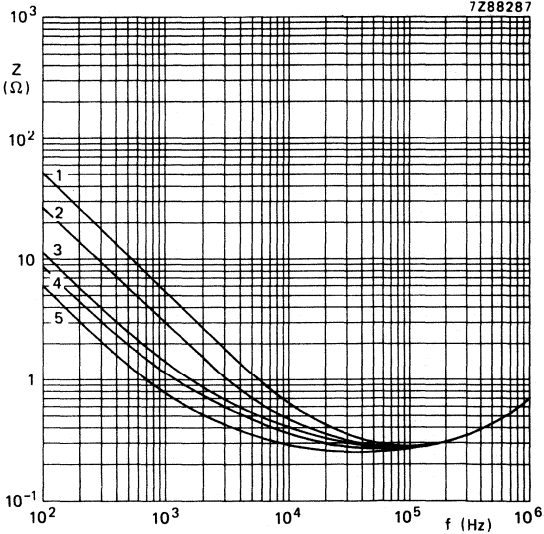


Fig. 40 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 5a:  
 curve 1 = 22  $\mu\text{F}$ , 63 V; curve 4 = 150  $\mu\text{F}$ , 16 V;  
 curve 2 = 47  $\mu\text{F}$ , 40 V; curve 5 = 220  $\mu\text{F}$ , 10 V.  
 curve 3 = 100  $\mu\text{F}$ , 25 V;

2222 030  
2222 031  
2222 032  
2222 033

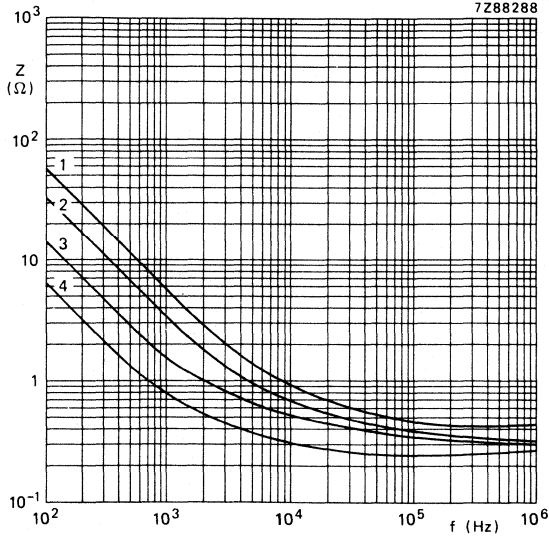


Fig. 41 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 4:  
curve 1 =  $22\text{ }\mu\text{F}$ , 63 V; curve 3 =  $100\text{ }\mu\text{F}$ , 25 V;  
curve 2 =  $47\text{ }\mu\text{F}$ , 40 V; curve 4 =  $220\text{ }\mu\text{F}$ , 10 V.

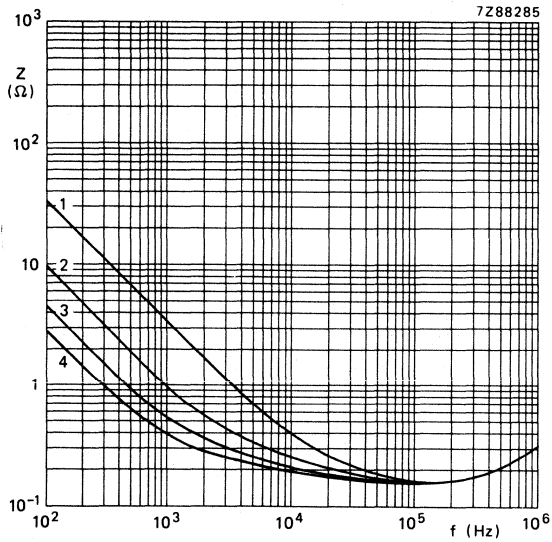


Fig. 42 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 5:  
curve 1 =  $47\text{ }\mu\text{F}$ , 63 V; curve 3 =  $330\text{ }\mu\text{F}$ , 10 V;  
curve 2 =  $150\text{ }\mu\text{F}$ , 25 V; curve 4 =  $470\text{ }\mu\text{F}$ , 6,3 V.

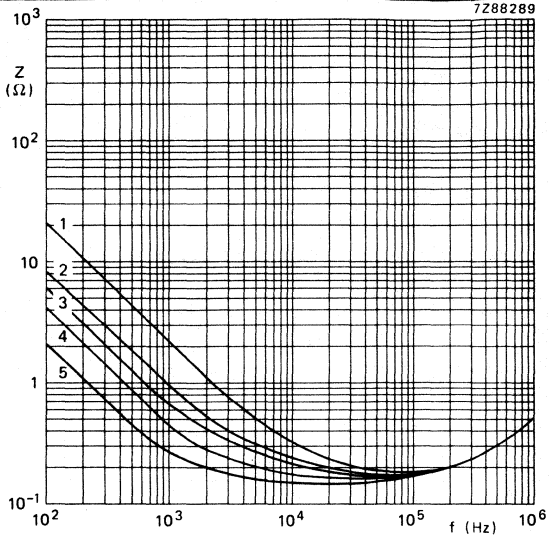


Fig. 43 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 6:  
 curve 1 = 68  $\mu\text{F}$ , 63 V; curve 4 = 330  $\mu\text{F}$ , 16 V;  
 curve 2 = 150  $\mu\text{F}$ , 40 V; curve 5 = 680  $\mu\text{F}$ , 6,3 V;  
 curve 3 = 220  $\mu\text{F}$ , 25 V;

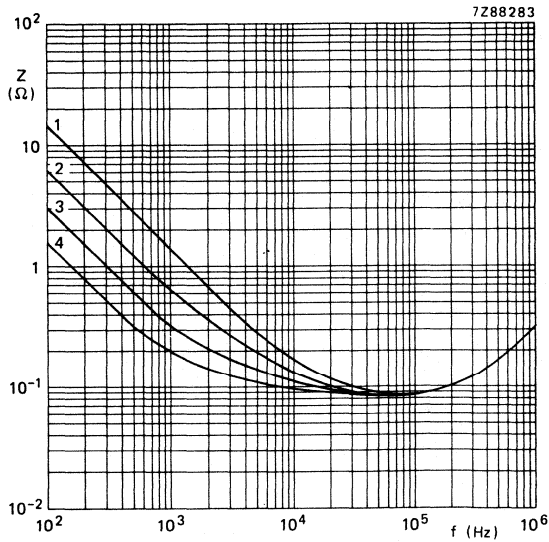


Fig. 44 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 7:  
 curve 1 = 100  $\mu\text{F}$ , 63 V; curve 3 = 470  $\mu\text{F}$ , 16 V;  
 curve 2 = 220  $\mu\text{F}$ , 40 V; curve 4 = 1000  $\mu\text{F}$ , 6,3 V.

2222 030  
 2222 031  
 2222 032  
 2222 033

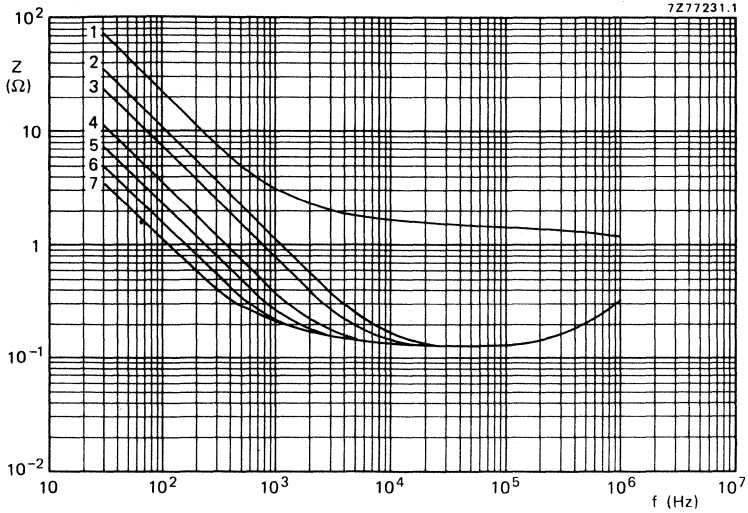


Fig. 45 Typical impedance as a function of frequency at 20 °C. Case size 00:

curve 1 = 68  $\mu$ F, 100 V;

curve 4 = 470  $\mu$ F, 25 V;

curve 6 = 1000  $\mu$ F, 10 V;

curve 2 = 150  $\mu$ F, 63 V;

curve 5 = 680  $\mu$ F, 16 V;

curve 7 = 1500  $\mu$ F, 6,3 V.

curve 3 = 220  $\mu$ F, 40 V;

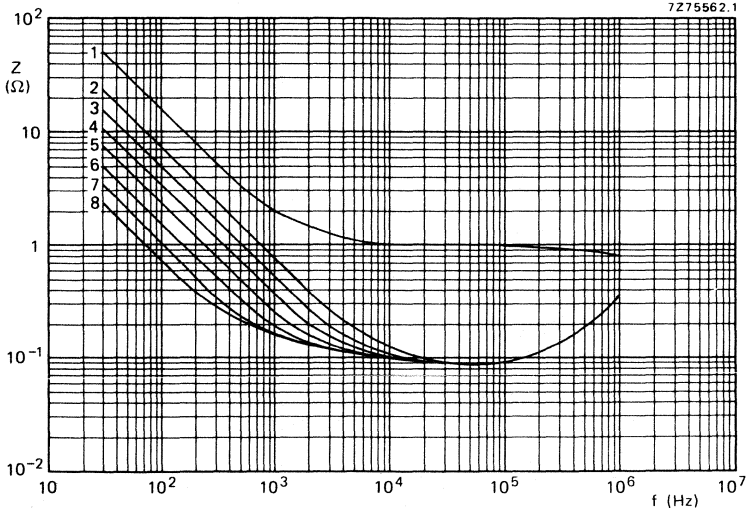


Fig. 46 Typical impedance as a function of frequency at 20 °C. Case size 01:

curve 1 = 100  $\mu$ F, 100 V;

curve 4 = 470  $\mu$ F, 40 V;

curve 6 = 1000  $\mu$ F, 16 V;

curve 2 = 220  $\mu$ F, 63 V;

curve 5 = 680  $\mu$ F, 25 V;

curve 7 = 1500  $\mu$ F, 10 V;

curve 3 = 330  $\mu$ F, 40 V;

curve 8 = 2200  $\mu$ F, 6,3 V.

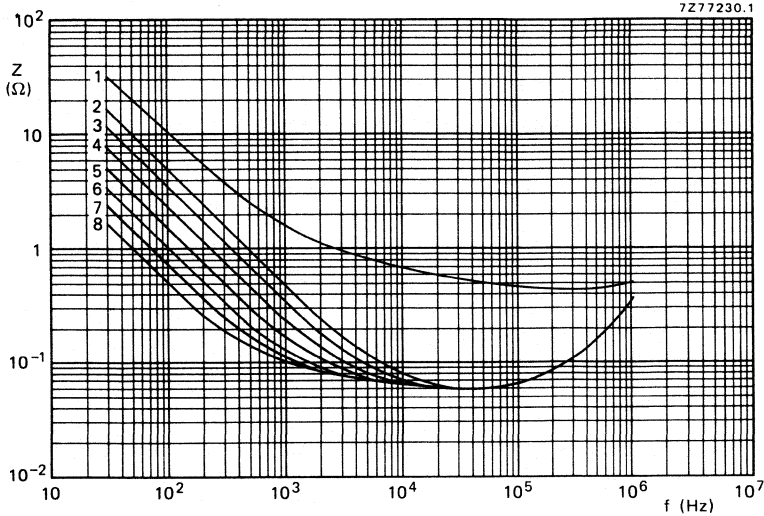


Fig. 47 Typical impedance as a function of frequency at 20 °C. Case size 02:

- |                               |                               |                                |
|-------------------------------|-------------------------------|--------------------------------|
| curve 1 = 150 $\mu$ F, 100 V; | curve 4 = 680 $\mu$ F, 40 V;  | curve 6 = 1500 $\mu$ F, 16 V;  |
| curve 2 = 330 $\mu$ F, 63 V;  | curve 5 = 1000 $\mu$ F, 25 V; | curve 7 = 2200 $\mu$ F, 10 V;  |
| curve 3 = 470 $\mu$ F, 63 V;  |                               | curve 8 = 3300 $\mu$ F, 6,3 V. |

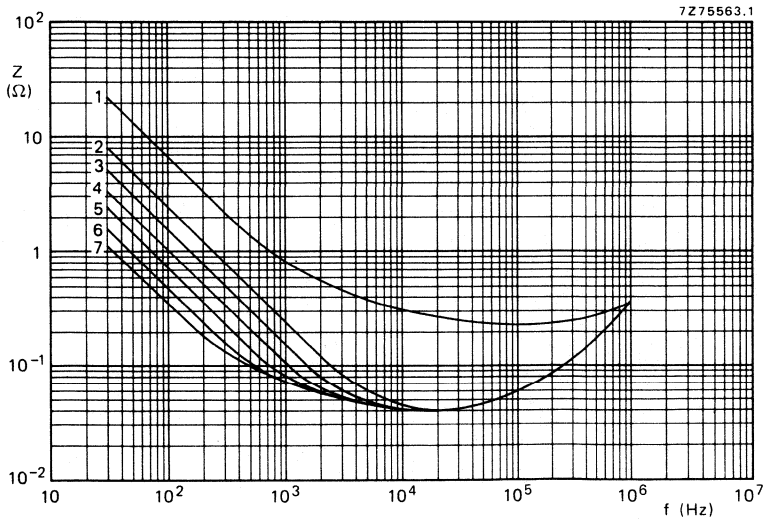


Fig. 48 Typical impedance as a function of frequency at 20 °C. Case size 03:

- |                               |                               |                                |
|-------------------------------|-------------------------------|--------------------------------|
| curve 1 = 220 $\mu$ F, 100 V; | curve 4 = 1500 $\mu$ F, 25 V; | curve 6 = 3300 $\mu$ F, 10 V;  |
| curve 2 = 680 $\mu$ F, 63 V;  | curve 5 = 2200 $\mu$ F, 16 V; | curve 7 = 4700 $\mu$ F, 6,3 V. |
| curve 3 = 1000 $\mu$ F, 40 V; |                               |                                |

2222 030  
 2222 031  
 2222 032  
 2222 033

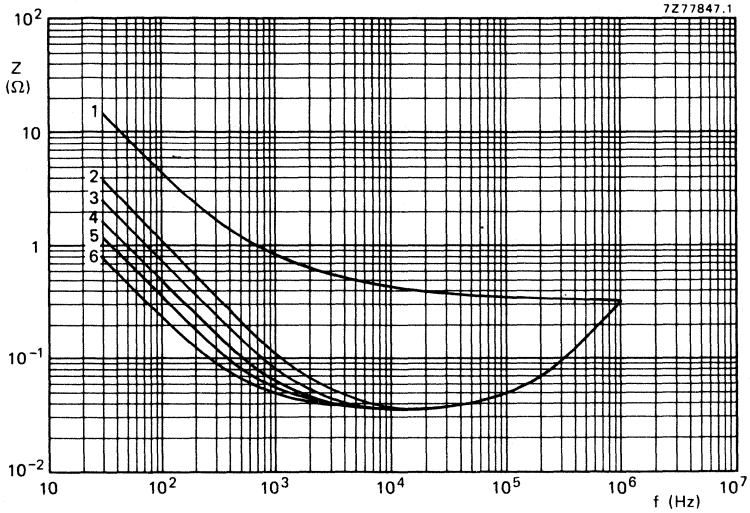


Fig. 49 Typical impedance as a function of frequency at 20 °C. **Case size 04:**  
 curve 1 = 330 μF, 100 V;      curve 3 = 2200 μF, 25 V;      curve 5 = 4700 μF, 10 V;  
 curve 2 = 1500 μF, 40 V;      curve 4 = 3300 μF, 16 V;      curve 6 = 6800 μF, 6,3 V.

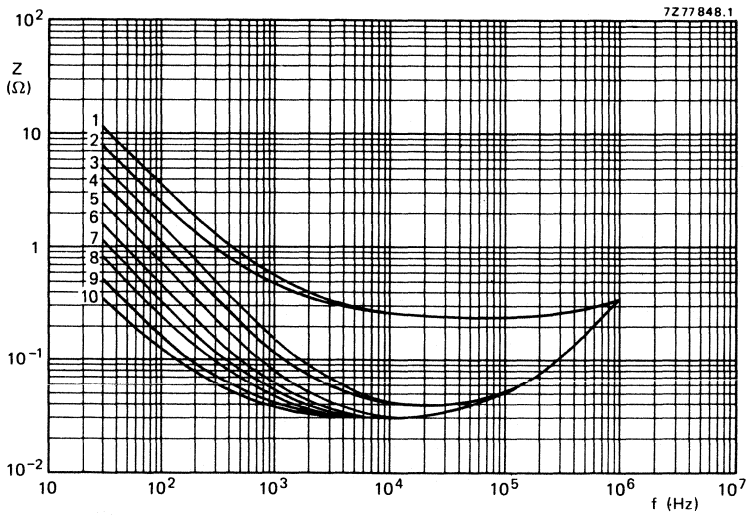


Fig. 50 Typical impedance as a function of frequency at 20 °C. **Case size 05:**  
 curve 1 = 470 μF, 100 V;      curve 4 = 1500 μF, 63 V;      curve 7 = 4700 μF, 16 V;  
 curve 2 = 680 μF, 100 V;      curve 5 = 2200 μF, 40 V;      curve 8 = 6800 μF, 10 V;  
 curve 3 = 1000 μF, 63 V;      curve 6 = 3300 μF, 25 V;      curve 9 = 10 000 μF, 6,3 V;  
 curve 10 = 15 000 μF, 6,3 V.

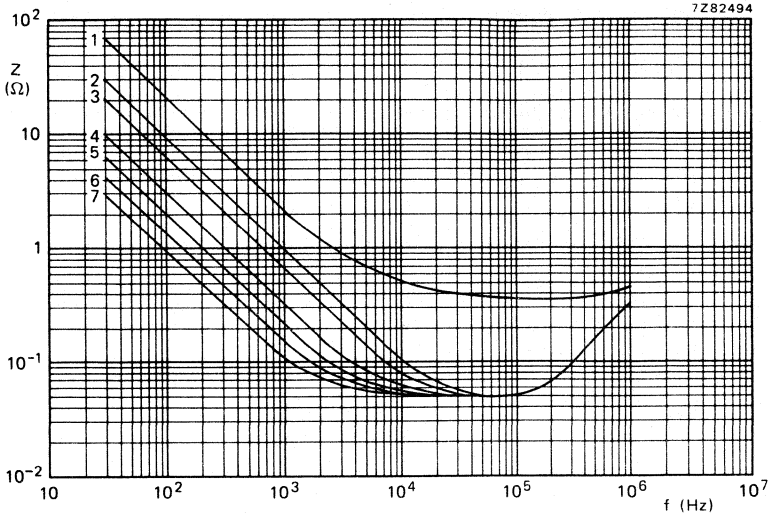


Fig. 51 Typical impedance as a function of frequency at 85 °C. Case size 00:

- |                              |                              |                                |
|------------------------------|------------------------------|--------------------------------|
| curve 1 = 68 $\mu$ F, 100 V; | curve 4 = 470 $\mu$ F, 25 V; | curve 6 = 1000 $\mu$ F, 10 V;  |
| curve 2 = 150 $\mu$ F, 63 V; | curve 5 = 680 $\mu$ F, 16 V; | curve 7 = 1500 $\mu$ F, 6,3 V. |
| curve 3 = 220 $\mu$ F, 40 V; |                              |                                |

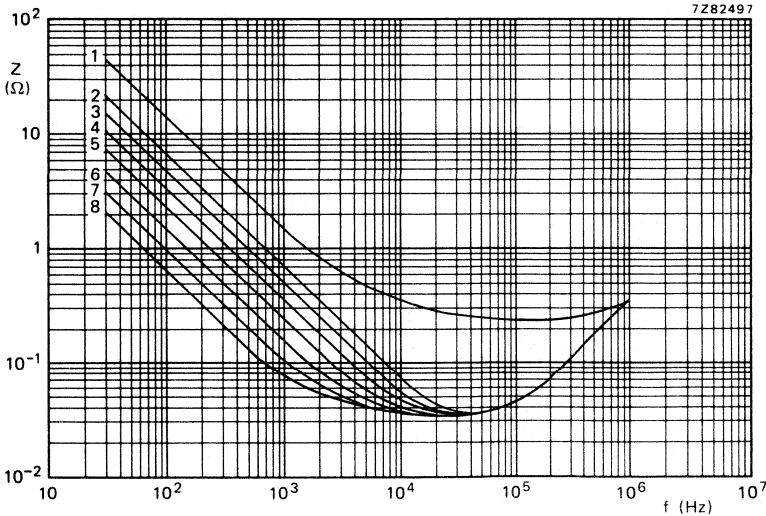


Fig. 52 Typical impedance as a function of frequency at 85 °C. Case size 01:

- |                               |                              |                                |
|-------------------------------|------------------------------|--------------------------------|
| curve 1 = 100 $\mu$ F, 100 V; | curve 4 = 470 $\mu$ F, 40 V; | curve 6 = 1000 $\mu$ F, 16 V;  |
| curve 2 = 220 $\mu$ F, 63 V;  | curve 5 = 680 $\mu$ F, 25 V; | curve 7 = 1500 $\mu$ F, 10 V;  |
| curve 3 = 330 $\mu$ F, 40 V;  |                              | curve 8 = 2200 $\mu$ F, 6,3 V. |

2222 030  
 2222 031  
 2222 032  
 2222 033

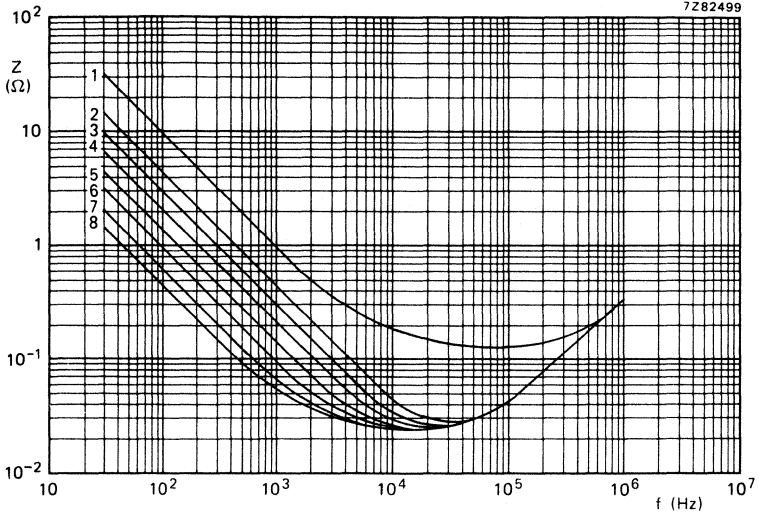


Fig. 53 Typical impedance as a function of frequency at 85 °C. **Case size 02:**  
 curve 1 = 150  $\mu$ F, 100 V;      curve 4 = 680  $\mu$ F, 40 V;      curve 6 = 1500  $\mu$ F, 16 V;  
 curve 2 = 330  $\mu$ F, 63 V;      curve 5 = 1000  $\mu$ F, 25 V;      curve 7 = 2200  $\mu$ F, 10 V;  
 curve 3 = 470  $\mu$ F, 63 V;      curve 8 = 3300  $\mu$ F, 6.3 V.

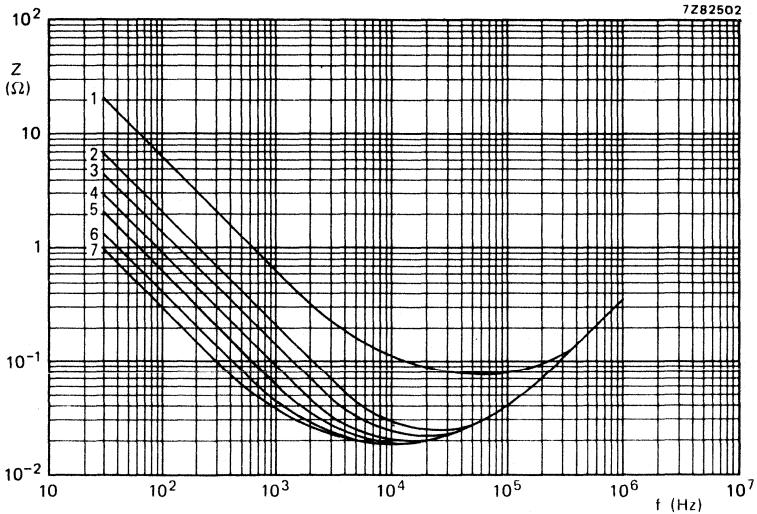


Fig. 54 Typical impedance as a function of frequency at 85 °C. **Case size 03:**  
 curve 1 = 220  $\mu$ F, 100 V;      curve 4 = 1500  $\mu$ F, 25 V;      curve 6 = 3300  $\mu$ F, 10 V;  
 curve 2 = 680  $\mu$ F, 63 V;      curve 5 = 2200  $\mu$ F, 16 V;      curve 7 = 4700  $\mu$ F, 6.3 V.  
 curve 3 = 1000  $\mu$ F, 40 V;



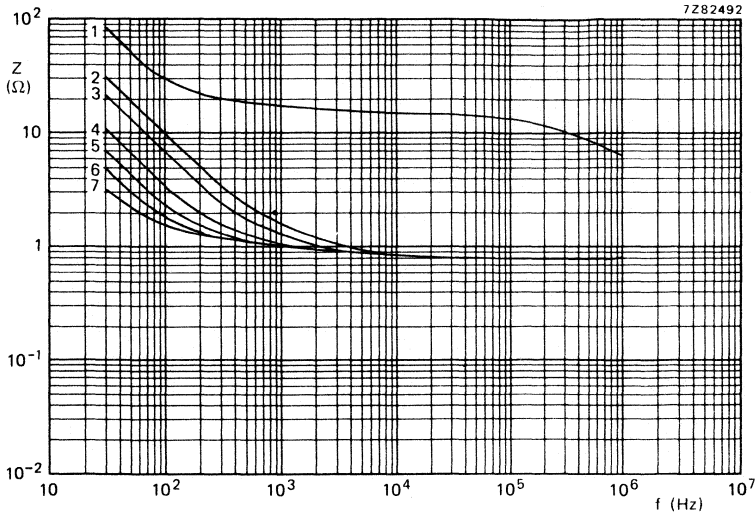


Fig. 55 Typical impedance as a function of frequency at  $-25^{\circ}\text{C}$ . Case size 00:

- |                                      |                                      |  |
|--------------------------------------|--------------------------------------|--|
| curve 1 = $68\ \mu\text{F}$ , 100 V; | curve 4 = $470\ \mu\text{F}$ , 25 V; | curve 6 = $1000\ \mu\text{F}$ , 10 V;  |
| curve 2 = $150\ \mu\text{F}$ , 63 V; | curve 5 = $680\ \mu\text{F}$ , 16 V; | curve 7 = $1500\ \mu\text{F}$ , 6,3 V. |
| curve 3 = $220\ \mu\text{F}$ , 40 V; |                                      |  |

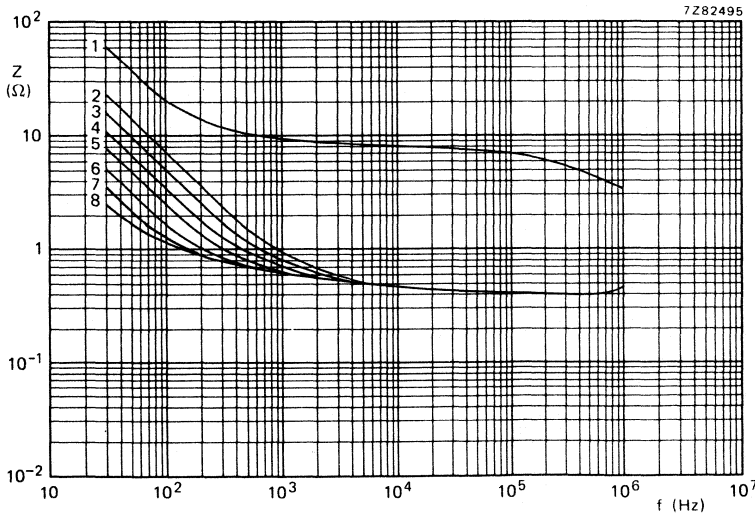


Fig. 56 Typical impedance as a function of frequency at  $-25^{\circ}\text{C}$ . Case size 01:

- |                                       |                                      |  |
|---------------------------------------|--------------------------------------|--|
| curve 1 = $100\ \mu\text{F}$ , 100 V; | curve 4 = $470\ \mu\text{F}$ , 40 V; | curve 6 = $1000\ \mu\text{F}$ , 16 V;  |
| curve 2 = $220\ \mu\text{F}$ , 63 V;  | curve 5 = $680\ \mu\text{F}$ , 25 V; | curve 7 = $1500\ \mu\text{F}$ , 10 V;  |
| curve 3 = $330\ \mu\text{F}$ , 40 V;  |                                      | curve 8 = $2200\ \mu\text{F}$ , 6,3 V. |

2222 030  
 2222 031  
 2222 032  
 2222 033

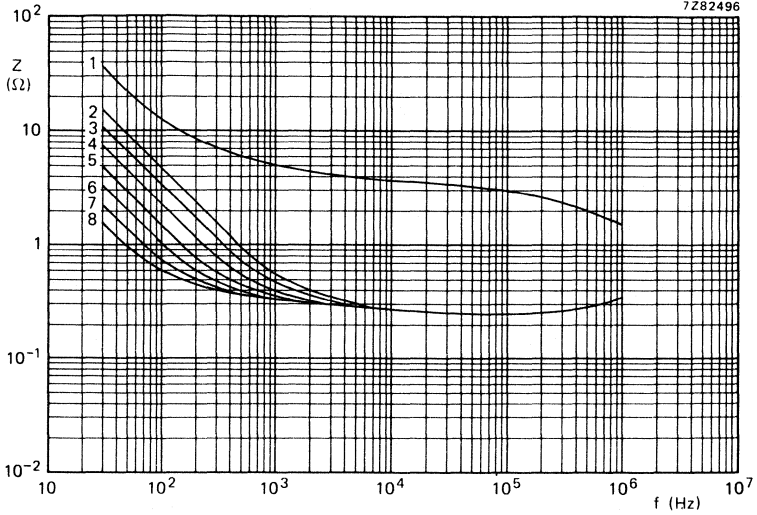


Fig. 57 Typical impedance as a function of frequency at  $-25^{\circ}\text{C}$ . **Case size 02:**  
 curve 1 =  $150\ \mu\text{F}$ ,  $100\ \text{V}$ ;      curve 4 =  $680\ \mu\text{F}$ ,  $40\ \text{V}$ ;      curve 6 =  $1500\ \mu\text{F}$ ,  $16\ \text{V}$ ;  
 curve 2 =  $330\ \mu\text{F}$ ,  $63\ \text{V}$ ;      curve 5 =  $1000\ \mu\text{F}$ ,  $25\ \text{V}$ ;      curve 7 =  $2200\ \mu\text{F}$ ,  $10\ \text{V}$ ;  
 curve 3 =  $470\ \mu\text{F}$ ,  $63\ \text{V}$ ;      curve 8 =  $3300\ \mu\text{F}$ ,  $6,3\ \text{V}$ .

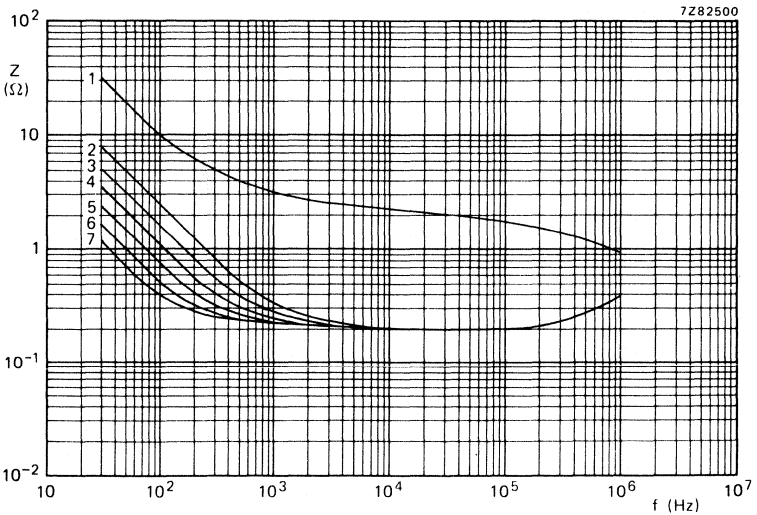


Fig. 58 Typical impedance as a function of frequency at  $-25^{\circ}\text{C}$ . **Case size 03:**  
 curve 1 =  $220\ \mu\text{F}$ ,  $100\ \text{V}$ ;      curve 4 =  $1500\ \mu\text{F}$ ,  $25\ \text{V}$ ;      curve 6 =  $3300\ \mu\text{F}$ ,  $10\ \text{V}$ ;  
 curve 2 =  $680\ \mu\text{F}$ ,  $63\ \text{V}$ ;      curve 5 =  $2200\ \mu\text{F}$ ,  $16\ \text{V}$ ;      curve 7 =  $4700\ \mu\text{F}$ ,  $6,3\ \text{V}$ .  
 curve 3 =  $1000\ \mu\text{F}$ ,  $40\ \text{V}$ ;

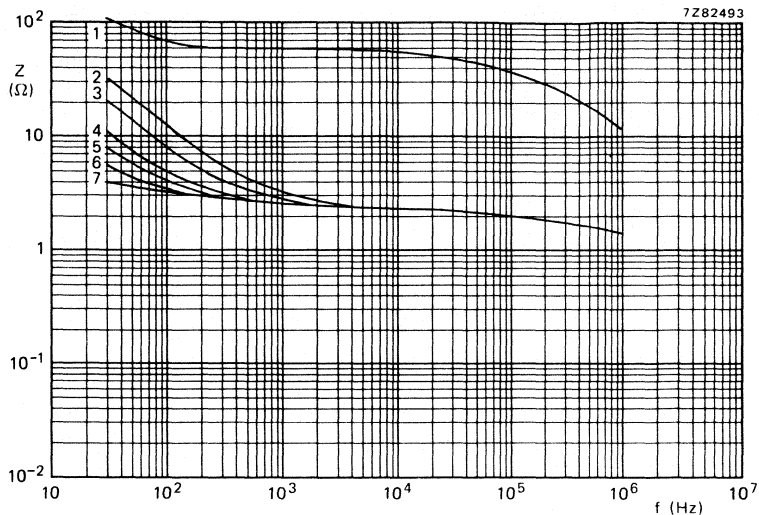


Fig. 59 Typical impedance as a function of frequency at  $-40^{\circ}\text{C}$ . Case size 00:

|                                      |                                      |  |
|--------------------------------------|--------------------------------------|--|
| curve 1 = $68\ \mu\text{F}$ , 100 V; | curve 4 = $470\ \mu\text{F}$ , 25 V; | curve 6 = $1000\ \mu\text{F}$ , 10 V;  |
| curve 2 = $150\ \mu\text{F}$ , 63 V; | curve 5 = $680\ \mu\text{F}$ , 16 V; | curve 7 = $1500\ \mu\text{F}$ , 6,3 V. |
| curve 3 = $220\ \mu\text{F}$ , 40 V; |                                      |  |

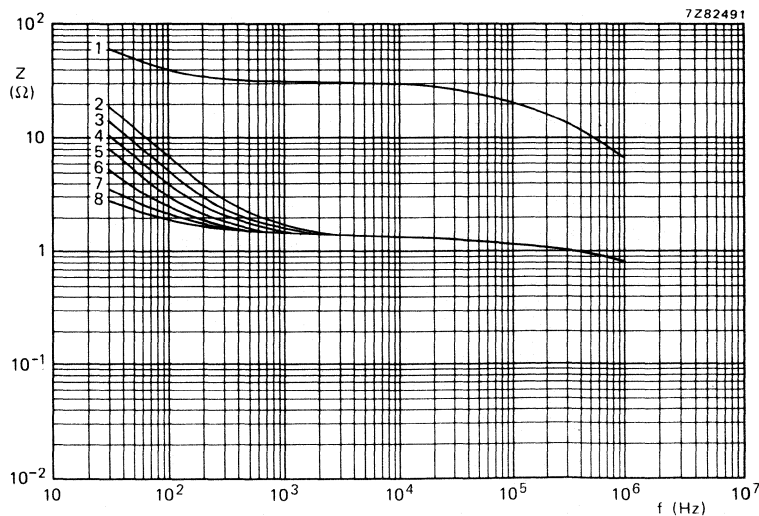


Fig. 60 Typical impedance as a function of frequency at  $-40^{\circ}\text{C}$ . Case size 01:

|                                       |                                      |  |
|---------------------------------------|--------------------------------------|--|
| curve 1 = $100\ \mu\text{F}$ , 100 V; | curve 4 = $470\ \mu\text{F}$ , 40 V; | curve 6 = $1000\ \mu\text{F}$ , 16 V;  |
| curve 2 = $220\ \mu\text{F}$ , 63 V;  | curve 5 = $680\ \mu\text{F}$ , 25 V; | curve 7 = $1500\ \mu\text{F}$ , 10 V;  |
| curve 3 = $330\ \mu\text{F}$ , 40 V;  |                                      | curve 8 = $2200\ \mu\text{F}$ , 6,3 V. |

2222 030  
 2222 031  
 2222 032  
 2222 033

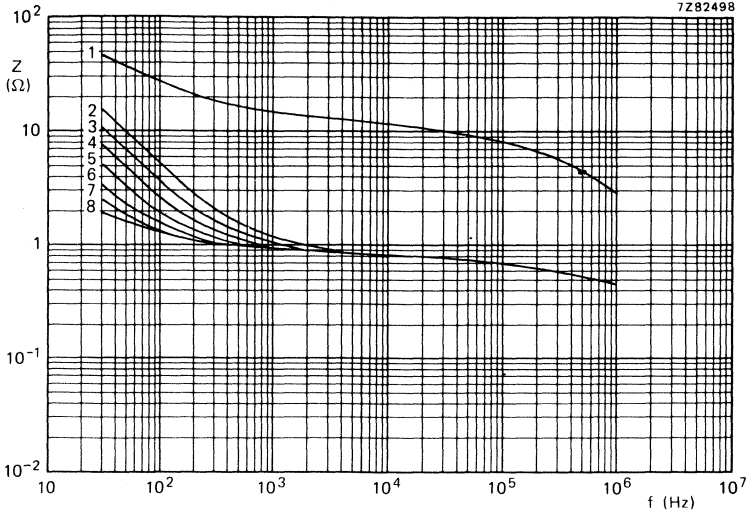


Fig. 61 Typical impedance as a function of frequency at  $-40\text{ }^{\circ}\text{C}$ . **Case size 02:**

curve 1 =  $150\text{ }\mu\text{F}$ , 100 V;

curve 4 =  $680\text{ }\mu\text{F}$ , 40 V;

curve 6 =  $1500\text{ }\mu\text{F}$ , 16 V;

curve 2 =  $330\text{ }\mu\text{F}$ , 63 V;

curve 5 =  $1000\text{ }\mu\text{F}$ , 25 V;

curve 7 =  $2200\text{ }\mu\text{F}$ , 10 V;

curve 3 =  $470\text{ }\mu\text{F}$ , 63 V;

curve 8 =  $3300\text{ }\mu\text{F}$ , 6,3 V.

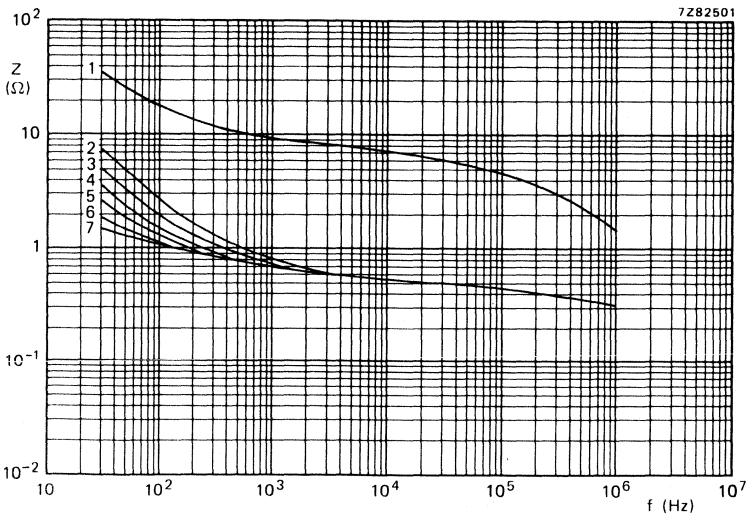


Fig. 62 Typical impedance as a function of frequency at  $-40\text{ }^{\circ}\text{C}$ . **Case size 03:**

curve 1 =  $220\text{ }\mu\text{F}$ , 100 V;

curve 4 =  $1500\text{ }\mu\text{F}$ , 25 V;

curve 6 =  $3300\text{ }\mu\text{F}$ , 10 V;

curve 2 =  $680\text{ }\mu\text{F}$ , 63 V;

curve 5 =  $2200\text{ }\mu\text{F}$ , 16 V;

curve 7 =  $4700\text{ }\mu\text{F}$ , 6,3 V.

curve 3 =  $1000\text{ }\mu\text{F}$ , 40 V;

**Equivalent series inductance (ESL)**

|                          |      |       |
|--------------------------|------|-------|
| Case size 1              | typ. | 15 nH |
| Case size 2              | typ. | 17 nH |
| Case sizes 3 and 4       | typ. | 30 nH |
| Case size 5a             | typ. | 85 nH |
| Case size 5              | typ. | 50 nH |
| Case sizes 6 and 7       | typ. | 65 nH |
| Case sizes 00 and 01     | typ. | 50 nH |
| Case size 02             | typ. | 55 nH |
| Case sizes 03, 04 and 05 | typ. | 60 nH |

**OPERATIONAL DATA**

Category temperature range

|                     |               |
|---------------------|---------------|
| case sizes 1 to 7   | -55 to +85 °C |
| case sizes 00 to 05 | -40 to +85 °C |

Typical life time

|                     |                          |                          |
|---------------------|--------------------------|--------------------------|
| case size 1         | $T_{amb} = 85\text{ °C}$ | $T_{amb} = 40\text{ °C}$ |
| case sizes 2 to 7   | 1500 h                   | 35 000 h                 |
| case sizes 00 to 05 | 3000 h                   | 70 000 h                 |
|                     | 10 000 h                 | > 200 000 h              |

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$

500 h

**PACKING**

All capacitors are supplied in boxes, except case sizes 1 to 7 of style 1, which are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 5.

Table 5

| case size | number of capacitors                 |                                     |                    |                    |                    |
|-----------|--------------------------------------|-------------------------------------|--------------------|--------------------|--------------------|
|           | style 1<br>on bandoliers<br>per reel | style 1<br>on bandoliers<br>per box | style 1<br>per box | style 2<br>per box | style 3<br>per box |
| 1         | 4000                                 | 1000                                |                    |                    | 1000               |
| 2         | 3000                                 | 1000                                |                    |                    | 1000               |
| 3         | 1000                                 | 1000                                |                    |                    | 1000               |
| 5a        | 500                                  | 500                                 |                    |                    | 1000               |
| 4         | 1000                                 | 1000                                |                    |                    | 1000               |
| 5         | 500                                  | 500                                 |                    |                    | 1000               |
| 6         | 500                                  | 500                                 |                    |                    | 1000               |
| 7         | 500                                  | 500                                 |                    |                    | 500                |
| 00        |                                      |                                     | 200                |                    | 200                |
| 01        |                                      |                                     | 200                |                    | 200                |
| 02        |                                      |                                     | 200                |                    | 200                |
| 03        |                                      |                                     | 200                | 200                |                    |
| 04        |                                      |                                     | 100                | 100                |                    |
| 05        |                                      |                                     | 100                | 100                |                    |

2222 030  
 2222 031  
 2222 032  
 2222 033

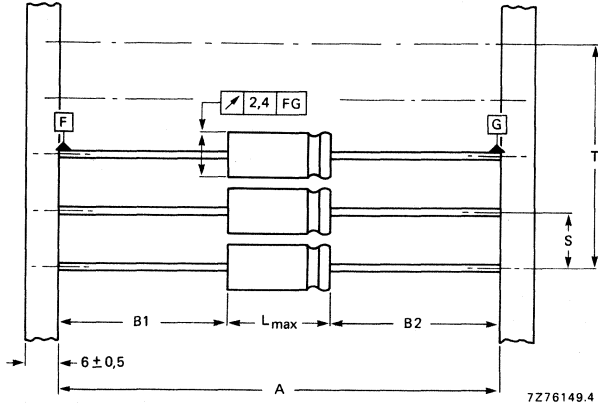


Fig. 63 Style 1 capacitors (case sizes 1 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 6 for dimensions A, S, T and L.  $|B1 - B2| = \text{max. } 1,4 \text{ mm.}$

**Table 6**  
 Dimensions in mm

| case size | A          | S         | T for number (n) of capacitors |              | L <sub>max</sub> |
|-----------|------------|-----------|--------------------------------|--------------|------------------|
|           |            |           | n < 50                         | 50 < n < 100 |                  |
| 1         | 63,5 ± 1,5 | 5 ± 0,4   | 5 (n-1) ± 2                    | 5 (n-1) ± 4  | 12,0             |
| 2         | 63,5 ± 1,5 | 5 ± 0,4   | 5 (n-1) ± 2                    | 5 (n-1) ± 4  | 10,5             |
| 3         | 63,5 ± 1,5 | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 10,5             |
| 5a        | 63,5 ± 1,5 | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 11,5             |
| 4         | 73 ± 1,6   | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 18,5             |
| 5         | 73 ± 1,6   | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 18,5             |
| 6         | 73 ± 1,6   | 15 ± 0,75 | 15 (n-1) ± 2                   | 15 (n-1) ± 4 | 18,5             |
| 7         | 73 ± 1,6   | 15 ± 0,75 | 15 (n-1) ± 2                   | 15 (n-1) ± 4 | 25,0             |

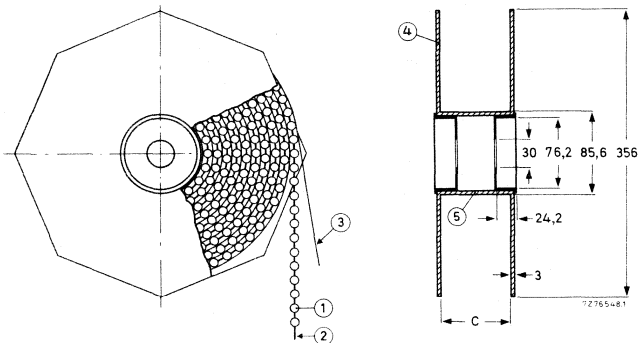


Fig. 64 Style 1 capacitors (case sizes 1 to 7) on bandoliers on reel; dimension C is 83,5 mm for case sizes 1, 2, 3 and 5a, and 88,5 mm for case sizes 4, 5, 6 and 7; the overall width of the reel is 94,5 mm and 99,5 mm respectively.

- 1 = capacitor                      4 = flange  
2 = bandolier                      5 = cylinder  
3 = paper

## TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition for case sizes 1 to 7.

After *endurance test*, 2000 h (1000 h for case size 1), 85 °C, the capacitors meet the following requirements:

- $\Delta C/C \leq \pm 15\%$ , for  $U_R = 10$  to 100 V;
- $\Delta C/C \leq +15\%$ ,  $-25\%$  for  $U_R = 6,3$  V;
- $\tan \delta \leq 130\%$  of specified value;
- d.c. leakage current  $\leq$  specified value;
- impedance at 10 kHz  $\leq 200\%$  of specified value.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

### Note:

- Capacitors 2222 030, case size 1 are miniature types, general-purpose grade.
- Capacitors 2222 030 and 2222 031, case sizes 2 to 7, are miniature types, long-life grade.
- Capacitors 2222 032 and 2222 033 are small types, long-life grade.





## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Single ended
- General applications

### QUICK REFERENCE DATA

Nominal capacitance range  
(E6 series): 0,10 to 4700  $\mu\text{F}$

Tolerance on nominal  
capacitance: -20 to +20%\*

Rated voltage range,  $U_R$   
(R5 series): 6,3 to 100 V

Category temperature range: -40 to +85  $^{\circ}\text{C}$


Endurance test at 85  $^{\circ}\text{C}$ : 1000 h

Shelf life at 0 V, 85  $^{\circ}\text{C}$ : 500 h

Basic specifications:  
IEC 384-4, G.P. grade  
DIN 41332/DIN 41259

Climatic category:  
IEC 68: 40/085/56  
DIN 40040: GPF

\*  $\pm 10\%$  to special order.

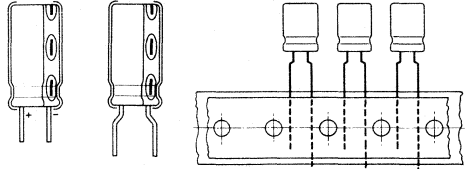

Selection chart for  $C_{nom} - U_R$  and relevant case sizes.

| $C_{nom}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |    |    |     |
|----------------------------|-----------|----|----|----|----|----|----|----|-----|
|                            | 6,3       | 10 | 16 | 25 | 35 | 40 | 50 | 63 | 100 |
| 0,10                       |           |    |    |    |    |    |    | 11 |     |
| 0,15                       |           |    |    |    |    |    |    | 11 |     |
| 0,22                       |           |    |    |    |    |    |    | 11 | 11  |
| 0,33                       |           |    |    |    |    |    |    | 11 |     |
| 0,47                       |           |    |    |    |    |    |    | 11 | 11  |
| 0,68                       |           |    |    |    |    |    |    | 11 |     |
| 1                          |           |    |    |    |    |    |    | 11 | 11  |
| 1,5                        |           |    |    |    |    |    |    | 11 | 11  |
| 2,2                        |           |    |    |    |    |    |    | 11 | 11  |
| 3,3                        |           |    |    |    |    |    |    | 11 | 11  |
| 4,7                        |           |    |    |    |    |    |    | 11 | 12  |
| 6,8                        |           |    |    |    |    |    |    | 11 | 12  |
| 10                         |           |    |    |    |    |    | 11 | 12 | 13  |
| 15                         |           |    |    |    |    | 11 | 12 | 13 | 14  |
| 22                         |           |    |    |    | 11 | 12 | 12 | 13 | 14  |
| 33                         |           |    | 11 |    |    | 12 |    | 13 | 15  |
| 47                         |           | 11 |    | 12 |    |    | 13 | 14 | 16  |
| 68                         |           |    | 12 |    |    | 13 | 14 | 15 | 17  |
| 100                        |           | 12 |    | 13 | 14 |    | 15 | 16 | 18  |
| 150                        | 12        |    | 13 | 14 |    | 15 | 16 | 17 | 18  |
| 220                        |           | 13 | 14 | 15 |    | 16 | 17 | 18 | 19  |
| 330                        | 13        | 14 | 15 | 16 |    | 17 | 18 | 19 | 20  |
| 470                        |           | 15 | 16 | 17 |    | 18 |    | 19 |     |
| 680                        | 15        | 16 | 17 | 18 |    | 19 | 19 | 20 |     |
| 1000                       | 16        | 17 | 18 | 19 | 19 |    | 20 |    |     |
| 1500                       | 17        | 18 | 19 | 20 |    |    |    |    |     |
| 2200                       | 18        |    | 19 | 20 |    |    |    |    |     |
| 3300                       | 19        |    | 20 |    |    |    |    |    |     |
| 4700                       | 20        |    |    |    |    |    |    |    |     |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 11        | $\phi$ 5 x 11           |
| 12        | $\phi$ 6 x 11           |
| 13        | $\phi$ 8 x 12           |
| 14        | $\phi$ 10 x 12          |
| 15        | $\phi$ 10 x 16          |
| 16        | $\phi$ 10 x 20          |
| 17        | $\phi$ 12,5 x 20        |
| 18        | $\phi$ 12,5 x 25        |
| 19        | $\phi$ 16 x 25          |
| 20        | $\phi$ 16 x 31          |

**APPLICATION**

These capacitors with high CU-product per unit volume are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits. Other applications are in timing and delay circuits. The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor has etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an insulated aluminium case.

**MECHANICAL DATA**

Dimensions in mm

The capacitor is available in 5 styles:

- style 1: long leads; in boxes;
- style 2: straight short leads; non preferred, in boxes;
- style 3: bent short leads only case sizes 11, 12 and 13; non preferred, in boxes;
- style 4: long leads; on tape on reel, positive leading; only case sizes 11 to 13;
- style 5: long leads; on tape in ammunition pack; only case sizes 11 to 13.

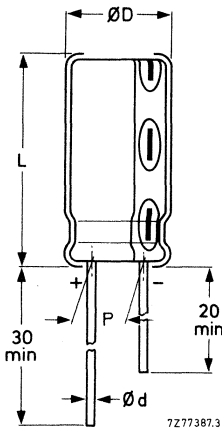


Fig. 1 Style 1; see Table 1 for dimensions d, D, L and P.

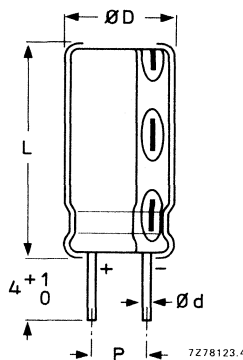


Fig. 2 Style 2; non preferred, see Table 1 for dimensions d, D, L and P.

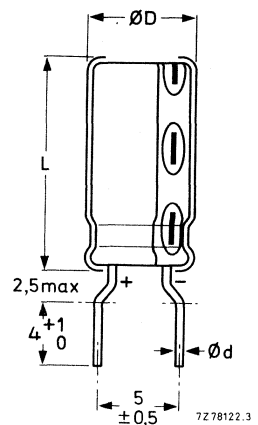



Fig. 3 Style 3, case sizes 11, 12 and 13; non preferred, see Table 1 for dimensions d, D and L.

Table 1

| case size | dimensions |                  |                  |     | mass g |
|-----------|------------|------------------|------------------|-----|--------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |        |
| 11        | 0,5*       | 5,5              | 12,0             | 2,0 | ± 0,5  |
| 12        | 0,6        | 6,5              | 12,0             | 2,5 |        |
| 13        | 0,6        | 8,5              | 12,5             | 3,5 |        |
| 14        | 0,6        | 10,5             | 12,5             | 5,0 |        |
| 15        | 0,6        | 10,5             | 17,0             | 5,0 |        |

| case size | dimensions |                  |                  |     | mass g |
|-----------|------------|------------------|------------------|-----|--------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |        |
| 16        | 0,6        | 10,5             | 21,0             | 5,0 | ± 0,5  |
| 17        | 0,6        | 13,0             | 21,0             | 5,0 |        |
| 18        | 0,6        | 13,0             | 26,0             | 5,0 |        |
| 19        | 0,8        | 16,5             | 26,0             | 7,5 |        |
| 20        | 0,8        | 16,5             | 32,0             | 7,5 |        |

\* 0,6 mm under consideration.

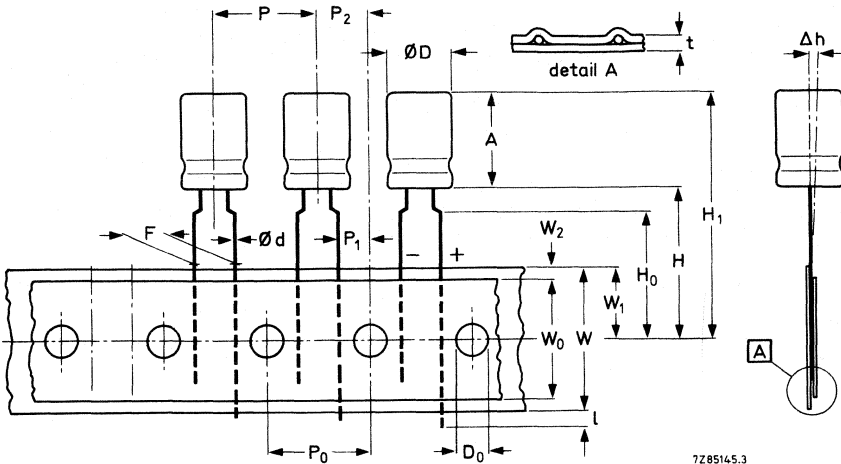

7285145.3

→ direction of tape transport (positive leading)

Fig. 4 Styles 4 and 5, case sizes 11 to 13; see Table 2 for dimensions. Negative-leading tapes are available to special order.

Table 2

|                                      | sym-<br>bol    | case size |      |      | tol.     |
|--------------------------------------|----------------|-----------|------|------|----------|
|                                      |                | 11        | 12   | 13   |          |
| Body diameter                        | D              | 5,5       | 6,5  | 8,5  | max.     |
| Body height                          | A              | 12,0      | 12,0 | 12,5 | max.     |
| Lead-wire diameter                   | d              | 0,5*      | 0,6  | 0,6  | ± 0,05   |
| Pitch of component                   | P              | 12,7      | 12,7 | 12,7 | ± 1,0    |
| Feed-hole pitch                      | P <sub>0</sub> | 12,7      | 12,7 | 12,7 | ± 0,2**  |
| Hole centre to lead                  | P <sub>1</sub> | 3,85      | 3,85 | 3,85 | ± 0,5    |
| Feed hole centre to component centre | P <sub>2</sub> | 6,35      | 6,35 | 6,35 | ± 1,0    |
| Lead-to-lead distance                | F              | 5,0       | 5,0  | 5,0  | + 0,6/-0 |
| Component alignment                  | Δh             | 0         | 0    | 0    | ± 1,0    |
| Tape width                           | W              | 18,0      | 18,0 | 18,0 | ± 0,5    |
| Hold-down tape width                 | W <sub>0</sub> | 12,5      | 12,5 | 12,5 | min.***  |
| Hole position                        | W <sub>1</sub> | 9,0       | 9,0  | 9,0  | ± 0,5    |
| Hold-down tape position              | W <sub>2</sub> | 2,5       | 2,5  | 2,5  | max.     |
| Height of component from tape centre | H              | 18,0      | 18,0 | 18,0 | + 1,5/-0 |
| Lead-wire clinch height              | H <sub>0</sub> | 16,0      | 16,0 | 16,0 | ± 0,5    |
| Component height                     | H <sub>1</sub> | 32,0      | 32,0 | 32,0 | max.     |
| Lead-wire protrusion                 | l              | 2,0       | 2,0  | 2,0  | max.     |
| Feed-hole diameter                   | D <sub>0</sub> | 4,0       | 4,0  | 4,0  | ± 0,2    |
| Total tape thickness                 | t              | 0,9       | 0,9  | 0,9  | max.     |

\* 0,6 mm under consideration.

\*\* Cumulative pitch error: ± 1 mm/20 pitches.

\*\*\* Other widths under consideration.

**Marking**

The capacitors are marked with: nominal capacitance, rated voltage, a symbol to identify the negative terminal, group number (035), code for factory of origin, name of manufacturer and date code (year and month) according to IEC 62.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 3

| UR   | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 035 followed by |         |         |                 |                    |       |
|------|-------------------------|--|---|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|-----------------|--------------------|-------|
|      |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel style 4 | in ammpack style 5 |       |
| 6,3  | 150                     | 260  | 22  | 0,24               | 1,33   | 0,20      | 12        | 53151                                 | 83151   | 63151   | 23151           | 33151              |       |
|      | 330                     | 320  | 45  | 0,24               | 0,61   | 0,20      | 13        | 53331                                 | 83331   | 63331   | 23331           | 33331              |       |
|      | 680                     | 460  | 89  | 0,24               | 0,29   | 0,20      | 15        | 53681                                 | 63681   |         |                 |                    |       |
|      | 1000                    | 530  | 129   | 0,24               | 0,20   | 0,20      | 16        | 53102                                 | 63102   |         |                 |                    |       |
|      | 1500                    | 640  | 192   | 0,24               | 0,13   | 0,23      | 17        | 53152                                 | 63152   |         |                 |                    |       |
|      | 2200                    | 800  | 280   | 0,24               | 0,09   | 0,16      | 18        | 53222                                 | 63222   |         |                 |                    |       |
|      | 3300                    | 850  | 419   | 0,24               | 0,06   | 0,11      | 19        | 53332                                 | 63332   |         |                 |                    |       |
|      | 4700                    | 960  | 595   | 0,24               | 0,07   | 0,04      | 20        | 53472                                 | 63472   |         |                 |                    |       |
|      | 10                      | 47   | 100   | 12                 | 0,20   | 3,40      | 0,20      | 11                                    | 54479   | 84479   | 64479           | 24479              | 34479 |
|      |                         | 100  | 160   | 23                 | 0,20   | 1,60      | 0,20      | 12                                    | 54101   | 84101   | 64101           | 24101              | 34101 |
| 220  |                         | 250  | 47  | 0,20               | 0,73   | 0,20      | 13        | 54221                                 | 84221   | 64221   | 24221           | 34221              |       |
| 330  |                         | 340  | 69  | 0,20               | 0,48   | 0,20      | 14        | 54331                                 | 64331   |         |                 |                    |       |
| 470  |                         | 400  | 97  | 0,20               | 0,34   | 0,20      | 15        | 54471                                 | 64471   |         |                 |                    |       |
| 680  |                         | 480  | 139   | 0,20               | 0,24   | 0,20      | 16        | 54681                                 | 64681   |         |                 |                    |       |
| 1000 |                         | 580  | 203   | 0,20               | 0,16   | 0,16      | 17        | 54102                                 | 64102   |         |                 |                    |       |
| 1500 |                         | 720  | 303   | 0,20               | 0,2  | 0,11      | 18        | 54152                                 | 64152   |         |                 |                    |       |
| 16   |                         | 33   | 90  | 14                 | 0,16   | 3,64      | 0,16      | 11                                    | 55339   | 85339   | 65339           | 25339              | 35339 |
|      |                         | 68   | 180   | 25                 | 0,16   | 1,76      | 0,16      | 12                                    | 55689   | 85689   | 65689           | 25689              | 35689 |
|      | 150                     | 270  | 51  | 0,16               | 0,80   | 0,16      | 13        | 55151                                 | 85151   | 65151   | 25151           | 35151              |       |
|      | 220                     | 320  | 73  | 0,16               | 0,55   | 0,16      | 14        | 55221                                 | 65221   |         |                 |                    |       |
|      | 330                     | 405  | 109   | 0,16               | 0,36   | 0,16      | 15        | 55331                                 | 65331   |         |                 |                    |       |
|      | 470                     | 480  | 153   | 0,16               | 0,26   | 0,16      | 16        | 55471                                 | 65471   |         |                 |                    |       |
|      | 680                     | 590  | 221   | 0,16               | 0,18   | 0,16      | 17        | 55681                                 | 65681   |         |                 |                    |       |
|      | 1000                    | 700  | 323   | 0,16               | 0,12   | 0,12      | 18        | 55102                                 | 65102   |         |                 |                    |       |
|      | 1500                    | 820  | 483   | 0,16               | 0,08   | 0,17      | 19        | 55152                                 | 65152   |         |                 |                    |       |
|      | 2200                    | 1000   | 707   | 0,16               | 0,11   | 0,05      | 19        | 55222                                 | 65222   |         |                 |                    |       |
| 3300 | 1200                    | 1059   | 0,16  | 0,08               | 0,08   | 20        | 55332     | 65332                                 |         |         |                 |                    |       |

Table 3 (continued)

| UR   | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 035 followed by |         |         |                 |                    |       |
|------|-------------------------|--|---|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|-----------------|--------------------|-------|
|      |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel style 4 | in ammpack style 5 |       |
| 25   | 47                      | 140  | 27  | 0,14               | 1,91   |           | 12        | 56479                                 | 86479   | 66479   | 26479           | 36479              |       |
|      | 100                     | 230  | 53  | 0,14               | 0,90   |           | 13        | 56101                                 | 86101   | 66101   | 26101           | 36101              |       |
|      | 150                     | 330  | 78  | 0,14               | 0,60   |           | 14        | 56151                                 | 86151   |         |                 |                    |       |
|      | 220                     | 400  | 113   | 0,14               | 0,41   |           | 15        | 56221                                 | 86221   |         |                 |                    |       |
|      | 330                     | 500  | 168   | 0,14               | 0,27   |           | 16        | 56331                                 | 86331   |         |                 |                    |       |
|      | 470                     | 600  | 238   | 0,14               | 0,19   |           | 17        | 56471                                 | 86471   |         |                 |                    |       |
|      | 680                     | 710  | 343   | 0,14               | 0,13   |           | 18        | 56681                                 | 86681   |         |                 |                    |       |
|      | 1000                    | 850  | 503   | 0,14               | 0,09   |           | 19        | 56102                                 | 86102   |         |                 |                    |       |
|      | 1500                    | 1000   | 753   | 0,14               | 0,06   | 0,15      | 20        | 56152                                 | 86152   |         |                 |                    |       |
|      | 2200                    | 1200   | 1103  | 0,14               | 0,04   | 0,10      | 20        | 56222                                 | 86222   |         |                 |                    |       |
|      | 35                      | 22   | 90  | 18                 | 0,12   | 3,41      |           | 11                                    | 90003   | 90004   | 90005           | 90034              | 90085 |
|      |                         | 100  | 280   | 73                 | 0,12   | 0,75      |           | 14                                    | 90059   | 90081   |                 |                    |       |
| 1000 |                         | 1050   | 703   | 0,12               | 0,08   |           | 19        | 90006                                 | 90007   |         |                 |                    |       |
| 40   | 15                      | 70   | 15  | 0,12               | 4,67   |           | 11        | 57159                                 | 87159   | 67159   | 27159           | 37159              |       |
|      | 22                      | 90   | 21  | 0,12               | 3,18   |           | 12        | 57229                                 | 87229   | 67229   | 27229           | 37229              |       |
|      | 33                      | 140  | 29  | 0,12               | 2,12   |           | 12        | 57339                                 | 87339   | 67339   | 27339           | 37339              |       |
|      | 68                      | 200  | 57  | 0,12               | 1,03   |           | 13        | 57689                                 | 87689   | 67689   | 27689           | 37689              |       |
|      | 150                     | 320  | 123   | 0,12               | 0,47   |           | 15        | 57151                                 | 87151   |         |                 |                    |       |
|      | 220                     | 470  | 179   | 0,12               | 0,32   |           | 16        | 57221                                 | 87221   |         |                 |                    |       |
|      | 330                     | 590  | 267   | 0,12               | 0,21   |           | 17        | 57331                                 | 87331   |         |                 |                    |       |
|      | 470                     | 800  | 379   | 0,12               | 0,15   |           | 18        | 57471                                 | 87471   |         |                 |                    |       |
|      | 680                     | 960  | 547   | 0,12               | 0,10   |           | 19        | 57681                                 | 87681   |         |                 |                    |       |
|      | 50                      | 10   | 60  | 13                 | 0,10   | 6,00      |           | 11                                    | 90008   | 90009   | 90011           | 90035              | 90087 |
|      |                         | 22   | 100   | 25                 | 0,10   | 2,73      |           | 12                                    | 90012   | 90013   | 90014           | 90036              | 90088 |
|      |                         | 47   | 180   | 50                 | 0,10   | 1,28      |           | 13                                    | 90015   | 90016   | 90033           | 90037              | 90038 |
| 68   |                         | 260  | 71  | 0,10               | 0,88   |           | 14        | 90017                                 | 90018   |         |                 |                    |       |
| 100  |                         | 320  | 103   | 0,10               | 0,60   |           | 15        | 90019                                 | 90021   |         |                 |                    |       |
| 150  |                         | 410  | 153   | 0,10               | 0,40   |           | 16        | 90022                                 | 90023   |         |                 |                    |       |
| 220  |                         | 500  | 223   | 0,10               | 0,27   |           | 17        | 90024                                 | 90025   |         |                 |                    |       |
| 330  |                         | 650  | 333   | 0,10               | 0,18   |           | 18        | 90026                                 | 90027   |         |                 |                    |       |
| 680  |                         | 980  | 683   | 0,10               | 0,09   |           | 19        | 90028                                 | 90029   |         |                 |                    |       |
| 1000 |                         | 1100   | 1003  | 0,10               | 0,06   |           | 20        | 90031                                 | 90032   |         |                 |                    |       |

Table 3 (continued)

| UR | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 035 followed by |         |         |                 |                    |
|----|-------------------------|--|---|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|-----------------|--------------------|
|    |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel style 4 | in ammpack style 5 |
| V  | 63                      | 3,5  | 3   | 0,08               | 550  | 55,0      | 11        | 58107                                 | 88107   | 68107   | 28107           | 38107              |
|    |                         | 4,5  | 3   | 0,08               | 367  | 36,7      | 11        | 58157                                 | 88157   | 68157   | 28157           | 38157              |
|    |                         | 6  | 3   | 0,08               | 250  | 25,0      | 11        | 58227                                 | 88227   | 68227   | 28227           | 38227              |
|    |                         | 7  | 3   | 0,08               | 167  | 16,7      | 11        | 58337                                 | 88337   | 68337   | 28337           | 38337              |
|    |                         | 8  | 4   | 0,08               | 117  | 11,7      | 11        | 58477                                 | 88477   | 68477   | 28477           | 38477              |
|    |                         | 10   | 4   | 0,08               | 81   | 8,1       | 11        | 58687                                 | 88687   | 68687   | 28687           | 38687              |
|    |                         | 12   | 4   | 0,08               | 55,0   | 55,0      | 11        | 58108                                 | 88108   | 68108   | 28108           | 38108              |
|    |                         | 16   | 5   | 0,08               | 36,7   | 36,7      | 11        | 58158                                 | 88158   | 68158   | 28158           | 38158              |
|    |                         | 22   | 6   | 0,08               | 25,0   | 25,0      | 11        | 58228                                 | 88228   | 68228   | 28228           | 38228              |
|    |                         | 32   | 7   | 0,08               | 16,7   | 16,7      | 11        | 58338                                 | 88338   | 68338   | 28338           | 38338              |
|    |                         | 40   | 9   | 0,08               | 11,7   | 11,7      | 11        | 58478                                 | 88478   | 68478   | 28478           | 38478              |
|    |                         | 55   | 12  | 0,08               | 8,09   | 8,09      | 11        | 58688                                 | 88688   | 68688   | 28688           | 38688              |
|    |                         | 70   | 16  | 0,08               | 5,50   | 5,50      | 12        | 58109                                 | 88109   | 68109   | 28109           | 38109              |
|    |                         | 98   | 22  | 0,08               | 3,67   | 3,67      | 12        | 58159                                 | 88159   | 68159   | 28159           | 38159              |
|    |                         | 120  | 31  | 0,08               | 2,50   | 2,50      | 13        | 58229                                 | 88229   | 68229   | 28229           | 38229              |
|    |                         | 160  | 45  | 0,08               | 1,67   | 1,67      | 13        | 58339                                 | 88339   | 68339   | 28339           | 38339              |
|    | 200                     | 62   | 0,08  | 1,17               | 1,17   | 14        | 58479     | 88479                                 | 68479   | 28479   | 38479           |                    |
|    | 280                     | 89   | 0,08  | 0,81               | 0,81   | 15        | 58689     | 88689                                 | 68689   | 28689   | 38689           |                    |
|    | 360                     | 129  | 0,08  | 0,55               | 0,55   | 16        | 58101     | 88101                                 | 68101   | 28101   | 38101           |                    |
|    | 480                     | 192  | 0,08  | 0,37               | 0,37   | 17        | 58151     | 88151                                 | 68151   | 28151   | 38151           |                    |
|    | 600                     | 280  | 0,08  | 0,25               | 0,25   | 18        | 58221     | 88221                                 | 68221   | 28221   | 38221           |                    |
|    | 750                     | 419  | 0,08  | 0,17               | 0,17   | 19        | 58331     | 88331                                 | 68331   | 28331   | 38331           |                    |
|    | 900                     | 595  | 0,08  | 0,12               | 0,12   | 19        | 58471     | 88471                                 | 68471   | 28471   | 38471           |                    |
|    | 1040                    | 860  | 0,08  | 0,08               | 0,08   | 20        | 58681     | 88681                                 | 68681   | 28681   | 38681           |                    |

Table 3 (continued)

| UR  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 035 followed by |         |         |                 |                     |
|-----|-------------------------|--|---|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|-----------------|---------------------|
|     |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel style 4 | in ammopack style 5 |
| 100 | 0,22                    | 10   | 3   | 0,07               | 205  |           | 11        | 59227                                 | 89227   | 69227   | 29227           | 39227               |
|     | 0,47                    | 12   | 4   | 0,07               | 95,7   |           | 11        | 59477                                 | 89477   | 69477   | 29477           | 39477               |
|     | 1,0                     | 15   | 5   | 0,07               | 45,0   |           | 11        | 59108                                 | 89108   | 69108   | 29108           | 39108               |
|     | 1,5                     | 20   | 6   | 0,07               | 30,0   |           | 11        | 59158                                 | 89158   | 69158   | 29158           | 39158               |
|     | 2,2                     | 27   | 7   | 0,07               | 20,5   |           | 11        | 59228                                 | 89228   | 69228   | 29228           | 39228               |
|     | 3,3                     | 35   | 10  | 0,07               | 13,6   |           | 11        | 59338                                 | 89338   | 69338   | 29338           | 39338               |
|     | 4,7                     | 45   | 12  | 0,07               | 9,57   |           | 12        | 59478                                 | 89478   | 69478   | 29478           | 39478               |
|     | 6,8                     | 59   | 17  | 0,07               | 6,62   |           | 12        | 59688                                 | 89688   | 69688   | 29688           | 39688               |
|     | 10                      | 80   | 23  | 0,07               | 4,50   |           | 13        | 59109                                 | 89109   | 69109   | 29109           | 39109               |
|     | 15                      | 105  | 33  | 0,07               | 3,00   |           | 13        | 59159                                 | 89159   | 69159   | 29159           | 39159               |
|     | 22                      | 140  | 47  | 0,07               | 2,05   |           | 14        | 59229                                 | 89229   | 69229   | 29229           | 39229               |
|     | 33                      | 180  | 69  | 0,07               | 1,36   |           | 15        | 59339                                 | 89339   | 69339   | 29339           | 39339               |
|     | 47                      | 240  | 97  | 0,07               | 0,96   |           | 16        | 59479                                 | 89479   | 69479   | 29479           | 39479               |
|     | 68                      | 340  | 139   | 0,07               | 0,66   |           | 17        | 59689                                 | 89689   | 69689   | 29689           | 39689               |
|     | 100                     | 440  | 203   | 0,07               | 0,45   |           | 18        | 59101                                 | 89101   | 69101   | 29101           | 39101               |
|     | 150                     | 630  | 303   | 0,07               | 0,30   |           | 18        | 59151                                 | 89151   | 69151   | 29151           | 39151               |
|     | 220                     | 800  | 443   | 0,07               | 0,20   |           | 19        | 59221                                 | 89221   | 69221   | 29221           | 39221               |
|     | 330                     | 900  | 663   | 0,07               | 0,14   |           | 20        | 59331                                 | 89331   | 69331   | 29331           | 39331               |



Capacitance

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 3

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

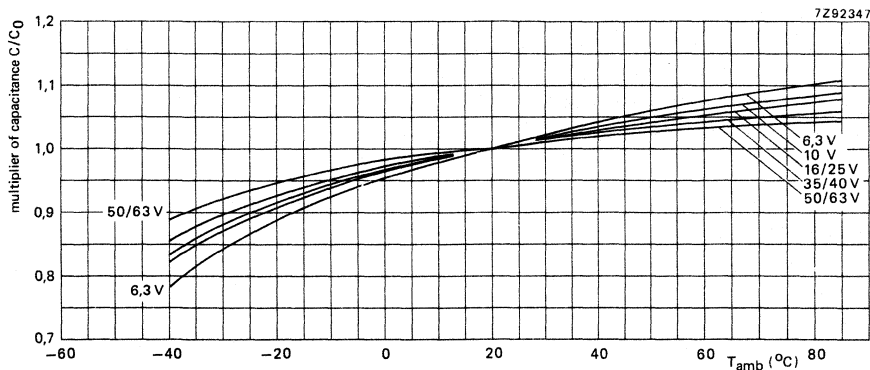


Fig. 5 Typical multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at 20 °C, 100 Hz.

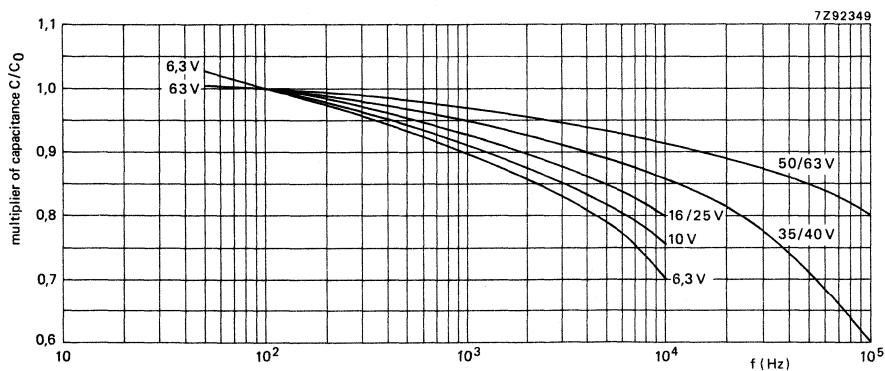


Fig. 6 Typical multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at 20 °C, 100 Hz.

**Voltage**



Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature <sup>▲</sup>   |             |
|---------------------------------|-------------|
| < 50 °C                         | 50 to 95 °C |
| $1,15 \times U_R$               | $U_R$       |
| $1,15 \times U_R$               | $U_R$       |
| 2 V<br>between $U_R$ and $-2$ V |             |
| $1,15 \times U_R$               |             |
| 2 V                             |             |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85$  °C

see Table 3

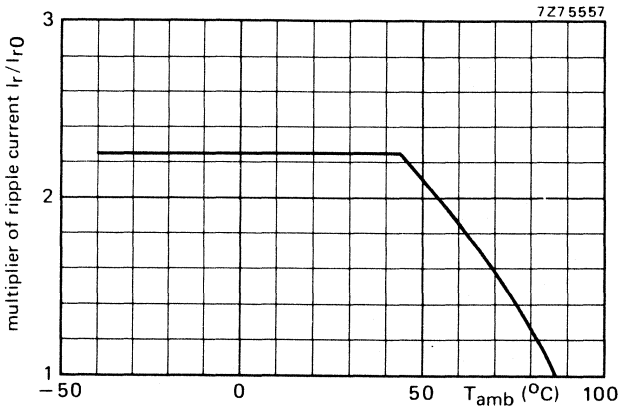


Fig. 7 Typical multiplier of ripple current as a function of ambient temperature;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

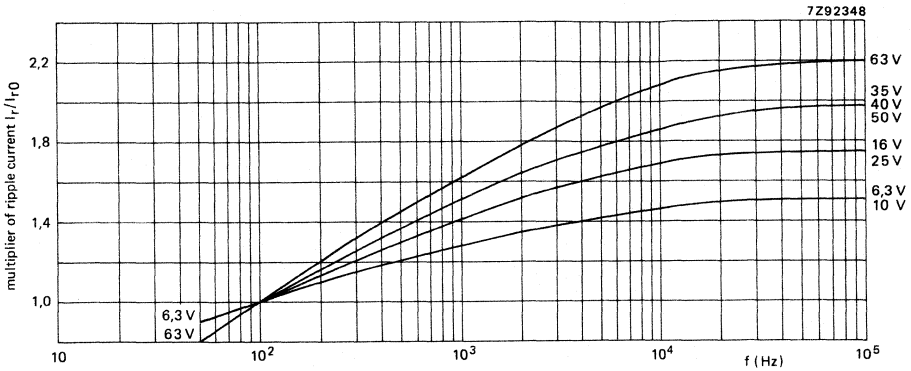


Fig. 8 Typical multiplier of ripple current as a function of frequency;  
 $I_{r0}$  = ripple current at 85 °C; 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application  
 of  $U_R$  at  $T_{amb} = 20 \text{ }^\circ\text{C}$

see Table 3 (0,02 CU + 3  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ ,  
 at  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 at  $T_{amb} = 85 \text{ }^\circ\text{C}$

approx. 0,1 x value stated in Table 3  
 $\leq$  value stated in Table 3

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40 \text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 3.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 3

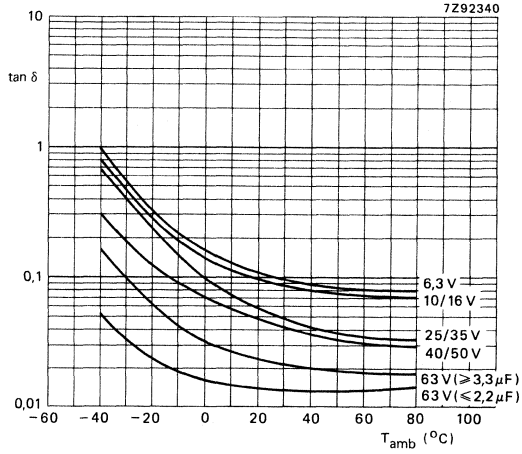


Fig. 9 Typical  $\tan \delta$  at 100 Hz as a function of ambient temperature.

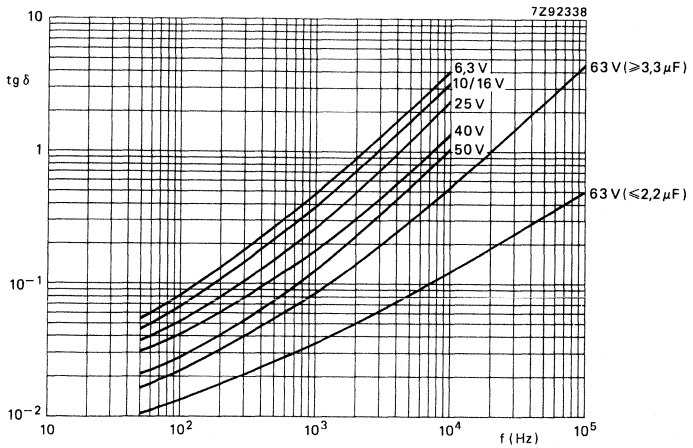


Fig. 10 Typical  $\tan \delta$  as a function of frequency at  $T_{amb} = 20^\circ\text{C}$ .

**Equivalent series resistance (ESR)**

$ESR = \tan \delta / \omega C$

Maximum  $\tan \delta$  and  $C$  at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$

see Table 3

**Equivalent series inductance (ESL)**

Case sizes 11, 12, 13

typ. 13 nH

Case sizes 14, 15, 16

typ. 16 nH

Case sizes 17, 18, 19, 20

typ. 18 nH

**Impedance (Z)**

Maximum impedance at  $T_{amb} = 20 \text{ }^\circ\text{C}$  and 10 kHz and 1 kHz ( $C_{nom} > 1000 \text{ } \mu\text{F}$ ), measured by means of a four-terminal circuit (Thomson circuit)

see Table 3

$z = Z \times C_{nom}$

see Table 4

Maximum ratio between impedances at  $T_{amb} = -25 \text{ }^\circ\text{C}$  and  $+20 \text{ }^\circ\text{C}$ , and at  $T_{amb} = -40 \text{ }^\circ\text{C}$  and  $+20 \text{ }^\circ\text{C}$ , at 100 Hz measured by means of a four-terminal circuit (Thomson circuit)


see Table 5

Table 4

|   | $T_{amb}$ | $z = Z \times C_{nom} (\Omega \mu\text{F}) \text{ at } U_R$ |      |      |      |      |      |      |      |       |
|---|-----------|---|------|------|------|------|------|------|------|-------|
|   |           | 6,3 V   | 10 V | 16 V | 25 V | 35 V | 40 V | 50 V | 63 V | 100 V |
| $C_{nom} > 1000 \text{ } \mu\text{F}$ ,<br>measured<br>at 1 kHz     | +20 °C    | 350   | 300  | 250  | 220  | —    | 200  | —    | 180  | 175   |
|   | -25 °C    | 1700  | 1100 | 800  | 570  | —    | 430  | —    | 330  | 300   |
|   | -40 °C    | 4500  | 2800 | 2000 | 1400 | —    | 1100 | —    | 800  | 700   |
| $C_{nom} \leq 1000 \text{ } \mu\text{F}$ ,<br>measured<br>at 10 kHz | +20 °C    | 200   | 160  | 120  | 90   | 75   | 70   | 60   | 55   | 45    |
|   | -25 °C    | 1200  | 750  | 560  | 400  | 330  | 300  | 220  | 180  | 130   |
|   | -40 °C    | 3200  | 2000 | 1500 | 1100 | 950  | 900  | 700  | 500  | 350   |

Table 5

|   | maximum impedance ratio at $U_R$ and 100 Hz |      |      |      |      |      |      |      |       |
|---|---|------|------|------|------|------|------|------|-------|
|   | 6,3 V                                       | 10 V | 16 V | 25 V | 35 V | 40 V | 50 V | 63 V | 100 V |
| $\frac{Z \text{ at } -25 \text{ }^\circ\text{C}}{Z \text{ at } +20 \text{ }^\circ\text{C}}$ | 4   | 3    | 2    | 2    | 2    | 2    | 2    | 2    | 2     |
| $\frac{Z \text{ at } -40 \text{ }^\circ\text{C}}{Z \text{ at } +20 \text{ }^\circ\text{C}}$ | 7   | 5    | 5    | 4    | 4    | 4    | 4    | 4    | 4     |

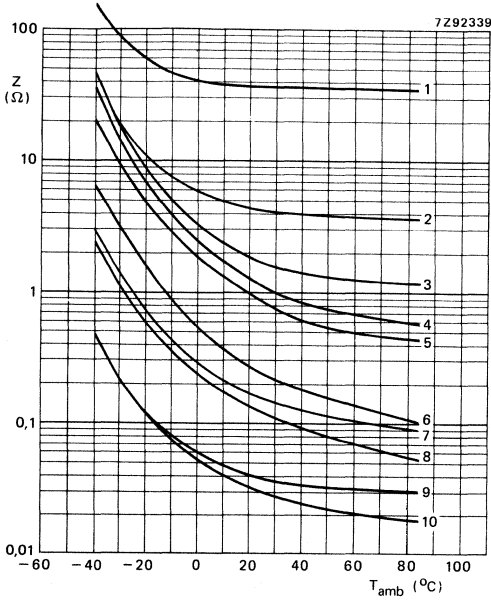


- Curve 1 = 0,47 μF; 63 V;
- curve 2 = 4,7 μF; 63 V;
- curve 3 = 15 μF; 40 V;
- curve 4 = 47 μF; 10 V;
- curve 5 = 47 μF; 25 V;
- curve 6 = 330 μF; 6,3 V;
- curve 7 = 150 μF; 6,3 V;
- curve 8 = 680 μF; 6,3 V;
- curve 9 = 680 μF; 50 V;
- curve 10 = 4700 μF; 6,3 V.

Fig. 11 Typical impedance at 10 kHz as a function of ambient temperature.


- Curve 1 = 0,47  $\mu$ F; 6,3 V;
- curve 2 = 4,7  $\mu$ F; 63 V;
- curve 3 = 15  $\mu$ F; 40 V;
- curve 4 = 47  $\mu$ F; 10 V;
- curve 5 = 47  $\mu$ F; 25 V;
- curve 6 = 47  $\mu$ F; 63 V;
- curve 7 = 330  $\mu$ F; 6,3 V.

Fig. 12 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ .

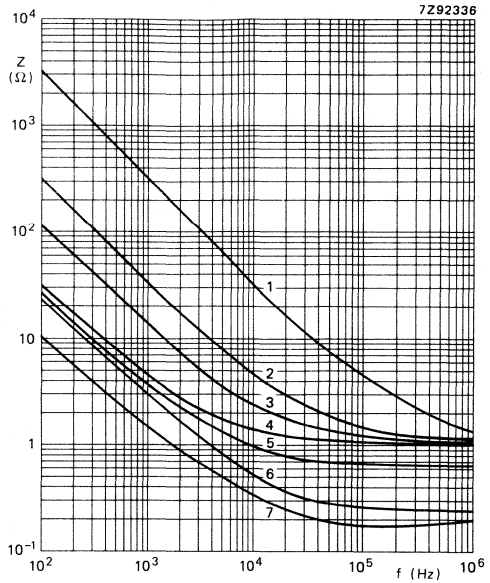

- Curve 1 = 150  $\mu$ F; 63 V;
- curve 2 = 680  $\mu$ F; 6,3 V;
- curve 3 = 680  $\mu$ F; 50 V;
- curve 4 = 4700  $\mu$ F; 6,3 V.

Fig. 13 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ .

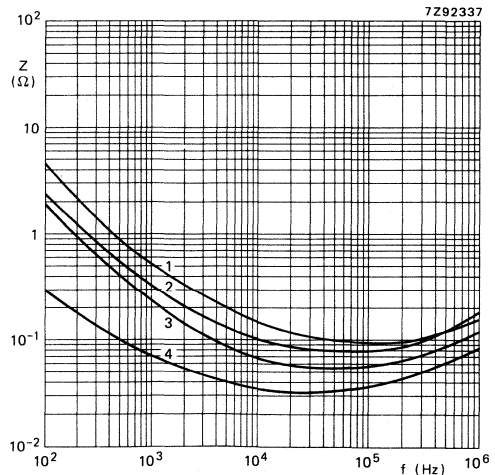

**OPERATIONAL DATA**

|  |               |
|--|---------------|
| Category temperature range                     | -40 to +85 °C |
| Typical life time                              |               |
| at $T_{amb} = 40\text{ °C}$                    | 50 000 h      |
| at $T_{amb} = 85\text{ °C}$                    | 2000 h        |
| at $T_{amb} = 95\text{ °C}$                    | 1000 h        |
| at $T_{amb} = 105\text{ °C}$                   | 500 h         |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h         |

**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 6.

Table 6

| case size | number of capacitors |                    |                    |                     |                                |
|-----------|----------------------|--------------------|--------------------|---------------------|--------------------------------|
|           | style 1<br>per box   | style 2<br>per box | style 3<br>per box | style 4<br>per reel | style 5<br>per ammunition pack |
| 11        | 1000                 | 1000               | 1000               | 1000                | 2000                           |
| 12        | 1000                 | 1000               | 1000               | 1000                | 2000                           |
| 13        | 1000                 | 1000               | 1000               | 500                 | 1000                           |
| 14        | 1000                 | 1000               |                    |                     |                                |
| 15        | 500                  | 500                |                    |                     |                                |
| 16        | 500                  | 500                |                    |                     |                                |
| 17        | 200                  | 200                |                    |                     |                                |
| 18        | 200                  | 200                |                    |                     |                                |
| 19        | 200                  | 200                |                    |                     |                                |
| 20        | 200                  | 200                |                    |                     |                                |

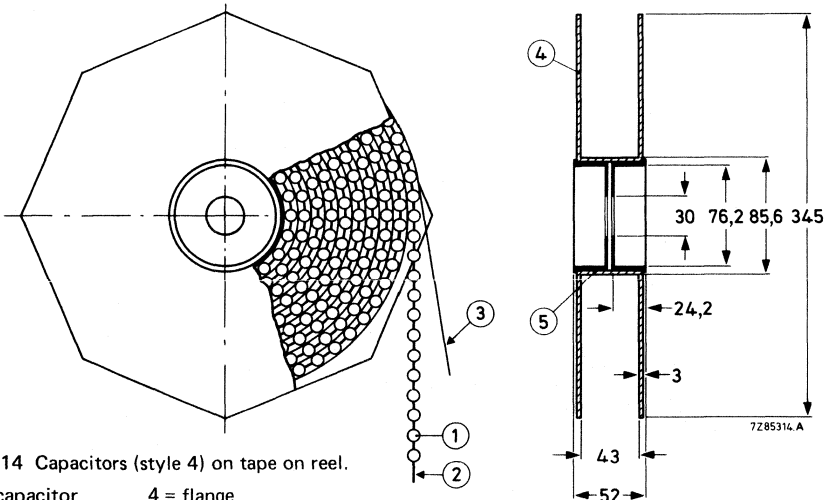


Fig. 14 Capacitors (style 4) on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder



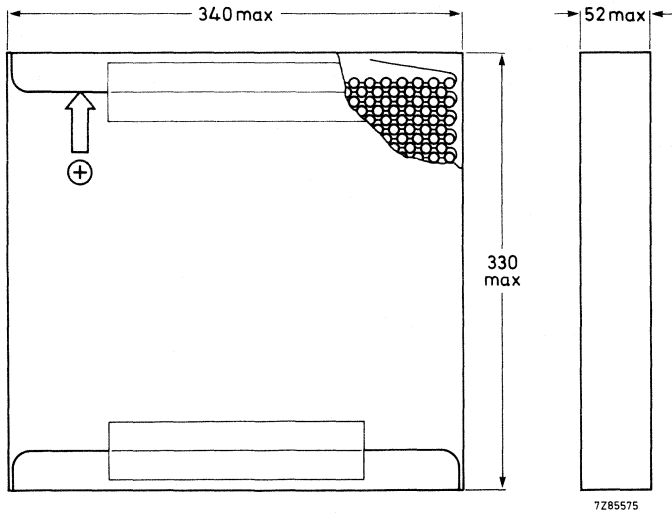


Fig. 15 Capacitors (style 5) on tape in ammunition pack.

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current of the 100 V range:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.


Note: Capacitors 2222 035 are miniature and small, general-purpose grade.



For low-leakage version, see 2222 013; for high-temperature version, see 2222 116.

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature type
- Single ended
- Long life
- General and industrial applications

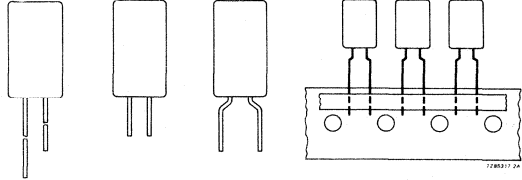

### QUICK REFERENCE DATA

|  |  |
|--|--|
| Nominal capacitance range (E6 series)    | 0,15 to 470 $\mu\text{F}$                      |
| Tolerance on nominal capacitance         | -20 to +20%*                                   |
| Rated voltage range, $U_R$ (R5 series)   | 6,3 to 63 V                                    |
| Category temperature range               | -55 to +85 $^{\circ}\text{C}$                  |
| Endurance test at 85 $^{\circ}\text{C}$  | 2000 h   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ | 500 h  |
| Basic specification                      | IEC384-4, long-life grade<br>DIN41332/DIN41259 |
| Climatic category                        | 55/085/56                                      |
| IEC68                                    | PPF  |
| DIN40040                                 |  |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 35 | 40 | 50 | 63 |
| 0,15                              |           |    |    |    |    |    |    | 11 |
| 0,22                              |           |    |    |    |    |    |    | 11 |
| 0,33                              |           |    |    |    |    |    |    | 11 |
| 0,47                              |           |    |    |    |    |    |    | 11 |
| 0,68                              |           |    |    |    |    |    |    | 11 |
| 1                                 |           |    |    |    |    |    |    | 11 |
| 1,5                               |           |    |    |    |    |    |    | 11 |
| 2,2                               |           |    |    |    |    |    |    | 11 |
| 3,3                               |           |    |    |    |    |    |    | 11 |
| 4,7                               |           |    |    |    |    |    |    | 11 |
| 6,8                               |           |    |    |    |    |    |    | 11 |
| 10                                |           |    |    |    |    |    | 11 | 11 |
| 15                                |           |    |    |    |    | 11 |    |    |
| 22                                |           |    |    |    | 11 |    |    | 11 |
| 33                                |           |    | 11 |    |    |    | 11 | 13 |
| 47                                |           | 11 |    |    | 11 |    | 13 | 13 |
| 68                                |           | 11 | 11 | 11 |    | 13 |    | 13 |
| 100                               | 11        |    | 11 | 13 |    |    | 13 |    |
| 150                               |           | 11 | 13 | 13 |    |    |    |    |
| 220                               |           | 13 | 13 | 13 |    |    |    |    |
| 330                               | 13        |    | 13 |    |    |    |    |    |
| 470                               |           | 13 |    |    |    |    |    |    |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 11        | $\phi$ 5 x 11           |
| 13        | $\phi$ 8,2 x 11         |

\*  $\pm$  10% to special order.

**APPLICATION**

These capacitors with extremely high CV product to volume ratio are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications, such as measuring and regulating circuits. Other applications are timing and delay circuits. The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor has etched and oxidised aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in all-insulated aluminium case.

**MECHANICAL DATA**

Dimensions in mm

The capacitor is available in 5 styles:

- style 1: long leads; in boxes;
- style 2: straight short leads; non preferred, in boxes;
- style 3: bent short leads (only case size 11); non preferred, in boxes;
- style 4: long leads; on tape on reel, positive leading;
- style 5: long leads; on tape in ammunition pack.

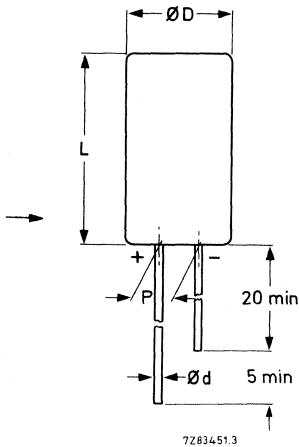


Fig. 1 Style 1; see Table 1 for dimensions d, D, L and P.

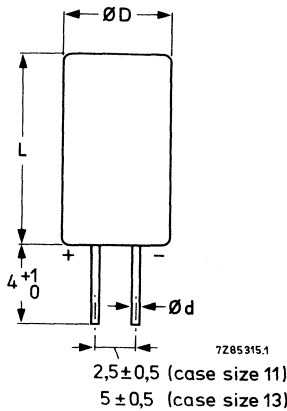


Fig. 2 Style 2; non preferred, see Table 1 for dimensions d, D and L.


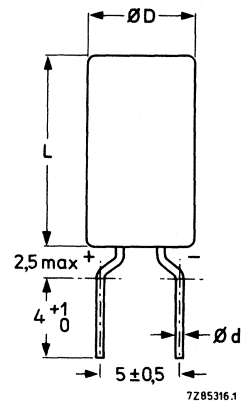


Fig. 3 Style 3; case size 11 only; non preferred, see Table 1 for dimensions d, D and L.

Table 1

| case size | dimensions |                  |                  |     | mass approx. g |
|-----------|------------|------------------|------------------|-----|----------------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |                |
| 11        | 0,5*       | 5,5              | 12,0             | 2,5 | 0,4            |
| 13        | 0,6        | 8,7              | 12,0             | 5,0 | 1,1            |

\* 0,6 mm under consideration.

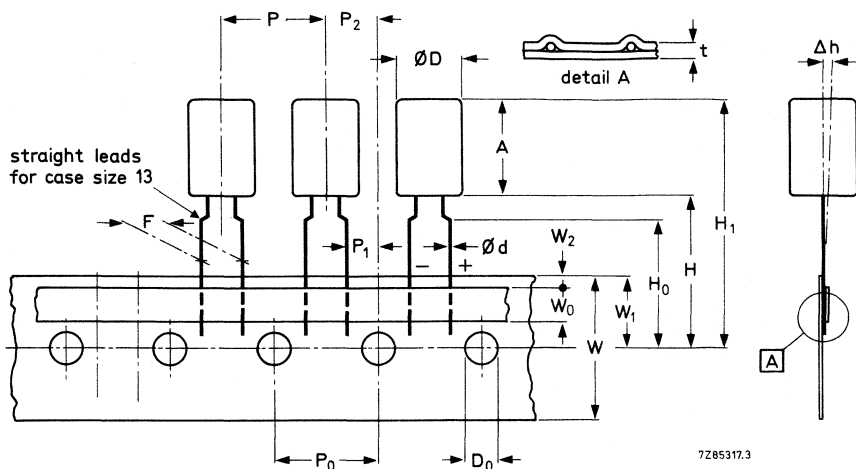

7285317.3

→ direction of tape transport (positive leading)

Fig. 4 Styles 4 and 5; see Table 2 for dimensions.  
Negative-leading tapes are available to special order.

Table 2

|                                      | symbol         | case size |      | tol.     |
|--------------------------------------|----------------|-----------|------|----------|
|                                      |                | 11        | 13   |          |
| Body diameter                        | D              | 5,5       | 8,7  | max.     |
| Body height                          | A              | 12,0      | 12,0 | max.     |
| Lead-wire diameter                   | d              | 0,5*      | 0,6  | ± 0,05   |
| Pitch of component                   | P              | 12,7      | 12,7 | ± 1,0    |
| Feed-hole pitch                      | P <sub>0</sub> | 12,7      | 12,7 | ± 0,2**  |
| Hole centre to lead                  | P <sub>1</sub> | 3,85      | 3,85 | ± 0,5    |
| Feed hole centre to component centre | P <sub>2</sub> | 6,35      | 6,35 | ± 0,7    |
| Lead-to-lead distance                | F              | 5,0       | 5,0  | + 0,6/-0 |
| Component alignment                  | Δh             | 0         | 0    | ± 1,0    |
| Tape width                           | W              | 18,0      | 18,0 | ± 0,5    |
| Hold-down tape width                 | W <sub>0</sub> | 6,0       | 6,0  | min.     |
| Hole position                        | W <sub>1</sub> | 9,0       | 9,0  | ± 0,5    |
| Hold-down tape position              | W <sub>2</sub> | 2,5       | 2,5  | max.     |
| Height of component from tape centre | H              | 18,0      | 18,0 | + 1,5/-0 |
| Lead-wire clinch height              | H <sub>0</sub> | 16,0      | —    | ± 0,5    |
| Component height                     | H <sub>1</sub> | 32,0      | 32,0 | max.     |
| Feed-hole diameter                   | D <sub>0</sub> | 4,0       | 4,0  | ± 0,2    |
| Total tape thickness                 | t              | 0,9       | 0,9  | max.     |

\* 0,6 mm under consideration.

\*\* Cumulative pitch error: ± 1 mm/20 pitches.

**Marking**

The capacitors are marked as follows:

*on the top*

- nominal capacitance;
- code letter for tolerance on nominal capacitance, according to IEC 62;
- rated voltage;
- polarity identification.

*on the circumference*

- name of manufacturer;
- group number (036);
- code letter of manufacturer;
- date code (year and month) according to IEC 62.

**Minimum atmospheric pressure**

8,5 kPa






**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 3

| $U_R$ | nom. cap. $\mu F$ | max. r.m.s. ripple current at $T_{amb} = 85^\circ C$ mA | max. d.c. leakage current at $U_R$ after 1 min. $\mu A$ | max. $\tan \delta$ | case size* | catalogue number 2222 036 followed by   |   |   |   |   |       |
|-------|-------------------|---|---|--------------------|------------|---|---|---|---|---|-------|
|       |                   |   |   |                    |            |  |  |  |  |  |       |
|       |                   |   |   |                    |            | style 1   | style 2   | style 3   | on reel style 4   | in ammpack style 5  |       |
| 6,3   | 100               | 80  | 7   | 0,20               | 11         | 53101   | 83101   | 63101   | 23101   | 33101   | 33101 |
|       | 330               | 180   | 16  | 0,20               | 13         | 53331   | 63331   | 63331   | 23331   | 33331   | 33331 |
| 10    | 47                | 60  | 6   | 0,16               | 11         | 54479   | 84479   | 64479   | 24479   | 34479   | 34479 |
|       | 68                | 70  | 7   | 0,16               | 11         | 54689   | 84689   | 64689   | 24689   | 34689   | 34689 |
|       | 150               | 95  | 12  | 0,20               | 11         | 54151   | 84151   | 64151   | 24151   | 34151   | 34151 |
|       | 220               | 170   | 17  | 0,16               | 13         | 54221   | 64221   |   | 24221   | 34221   | 34221 |
|       | 470               | 230   | 31  | 0,20               | 13         | 54471   | 64471   |   | 24471   | 34471   | 34471 |
|       |                   |   |   |                    |            |   |   |   |   |   |       |
| 16    | 33                | 55  | 7   | 0,14               | 11         | 55339   | 85339   | 65339   | 25339   | 35339   | 35339 |
|       | 100               | 90  | 13  | 0,16               | 11         | 55101   | 85101   | 65101   | 25101   | 35101   | 35101 |
|       | 150               | 150   | 18  | 0,14               | 13         | 55151   | 65151   |   | 25151   | 35151   | 35151 |
|       | 220               | 180   | 24  | 0,14               | 13         | 55221   | 65221   |   | 25221   | 35221   | 35221 |
|       | 330               | 210   | 35  | 0,16               | 13         | 55331   | 65331   |   | 25331   | 35331   | 35331 |
| 25    | 68                | 80  | 13  | 0,14               | 11         | 56689   | 86689   | 66689   | 26689   | 36689   | 36689 |
|       | 100               | 130   | 18  | 0,12               | 13         | 56101   | 66101   |   | 26101   | 36101   | 36101 |
|       | 220               | 180   | 36  | 0,14               | 13         | 56221   | 66221   |   | 26221   | 36221   | 36221 |
|       |                   |   |   |                    |            |   |   |   |   |   |       |
| 35    | 22                | 50  | 8   | 0,10               | 11         | 90001   | 90002   | 90003   | 90016   | 90027   | 90027 |
|       | 47                | 70  | 13  | 0,12               | 11         | 90094   | 90095   | 90096   | 90097   | 90098   | 90098 |
|       | 150               | 160   | 35  | 0,12               | 13         | 90099   | 90101   |   | 90102   | 90103   | 90103 |
|       |                   |   |   |                    |            |   |   |   |   |   |       |
| 40    | 15                | 45  | 7   | 0,10               | 11         | 57159   | 87159   | 67159   | 27159   | 37159   | 37159 |
|       | 68                | 120   | 20  | 0,10               | 13         | 57689   | 67689   |   | 27689   | 37689   | 37689 |
| 50    | 10                | 40  | 6   | 0,08               | 11         | 90004   | 90005   | 90006   | 90017   | 90028   | 90028 |
|       | 33                | 65  | 13  | 0,10               | 11         | 90104   | 90105   | 90106   | 90107   | 90108   | 90108 |
|       | 47                | 110   | 18  | 0,08               | 13         | 90011   | 90012   |   | 90019   | 90031   | 90031 |
|       | 100               | 150   | 33  | 0,10               | 13         | 90109   | 90111   |   | 90112   | 90113   | 90113 |

\* Case size 11:  $\phi 5$  mm x 11 mm; case size 13;  $\phi 8,2$  mm x 11 mm (nominal dimensions).

Table 3 (continued)

| UR | nom. cap. $\mu F$ | max. r.m.s. ripple current at $T_{amb} = 85 \text{ }^\circ C$ mA | max. d.c. leakage current at UR after 1 min. $\mu A$ | max. $\tan \delta$ | case size * | catalogue number 2222 036 followed by |         |         |                 |                    |
|----|-------------------|--|--|--------------------|-------------|---------------------------------------|---------|---------|-----------------|--------------------|
| V  |                   |  |  |                    |             | style 1                               | style 2 | style 3 | on reel style 4 | in ammpack style 5 |
| 63 | 0,15              | 5  | 4  | 0,08               | 11          | 58157                                 | 88157   | 68157   | 28157           | 38157              |
|    | 0,22              | 6,5  | 4  | 0,06               | 11          | 58227                                 | 88227   | 68227   | 28227           | 38227              |
|    | 0,33              | 8  | 4  | 0,06               | 11          | 58337                                 | 88337   | 68337   | 28337           | 38337              |
|    | 0,47              | 9,5  | 4  | 0,06               | 11          | 58477                                 | 88477   | 68477   | 28477           | 38477              |
|    | 0,68              | 11   | 4  | 0,06               | 11          | 58687                                 | 88687   | 68687   | 28687           | 38687              |
|    | 1,0               | 13,5   | 4  | 0,06               | 11          | 58108                                 | 88108   | 68108   | 28108           | 38108              |
|    | 1,5               | 16,5   | 4  | 0,06               | 11          | 58158                                 | 88158   | 68158   | 28158           | 38158              |
|    | 2,2               | 20   | 4  | 0,06               | 11          | 58228                                 | 88228   | 68228   | 28228           | 38228              |
|    | 3,3               | 25   | 5  | 0,06               | 11          | 58338                                 | 88338   | 68338   | 28338           | 38338              |
|    | 4,7               | 30   | 5  | 0,06               | 11          | 58478                                 | 88478   | 68478   | 28478           | 38478              |
|    | 6,8               | 40   | 6  | 0,06               | 11          | 58688                                 | 88688   | 68688   | 28688           | 38688              |
|    | 10                | 45   | 7  | 0,06               | 11          | 58109                                 | 88109   | 68109   | 28109           | 38109              |
|    | 22                | 55   | 11   | 0,08               | 11          | 58229                                 | 88229   | 68229   | 28229           | 38229              |
|    | 33                | 110  | 16   | 0,06               | 13          | 58339                                 | 88339   | 68339   | 28339           | 38339              |
|    | 47                | 120  | 21   | 0,07               | 13          | 58479                                 | 88479   | 68479   | 28479           | 38479              |
|    | 68                | 140  | 29   | 0,08               | 13          | 58689                                 | 88689   | 68689   | 28689           | 38689              |

\* Case size 11:  $\phi 5 \text{ mm} \times 11 \text{ mm}$ ; case size 13:  $\phi 8,2 \text{ mm} \times 11 \text{ mm}$  (nominal dimensions).



**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 3

Tolerance on nominal capacitance at 100 Hz

-20 to +20%

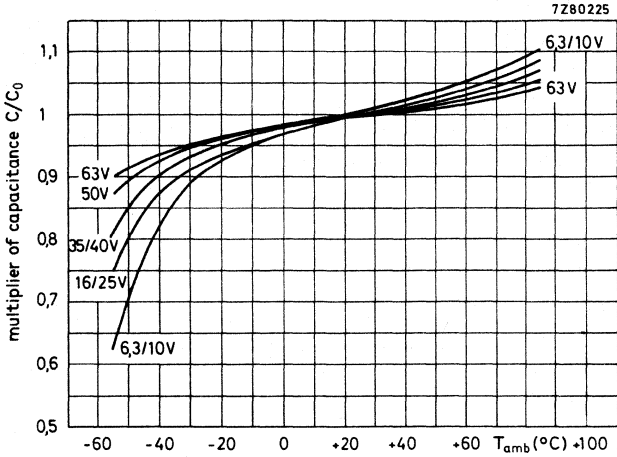


Fig. 5 Typical multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at 20 °C, 100 Hz.

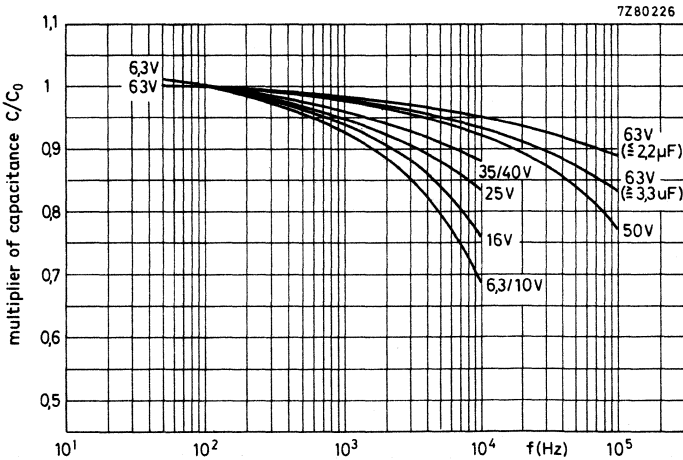


Fig. 6 Typical multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at 20 °C, 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- (a) max. (d.c. + peak a.c.) voltage
- (b) max. peak a.c. voltage without d.c. voltage applied
- (c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature <sup>▲</sup>   |                       |
|---------------------------------|-----------------------|
| < 50 °C                         | 50 to 95 °C           |
| 1,15 x U <sub>R</sub>           | U <sub>R</sub>        |
| 1,15 x U <sub>R</sub>           | U <sub>R</sub>        |
| 2 V                             |                       |
| between U <sub>R</sub> and -2 V |                       |
| 1,2 x U <sub>R</sub>            | 1,15 x U <sub>R</sub> |
| 2 V                             |                       |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and T<sub>amb</sub> = 85 °C

see Table 3

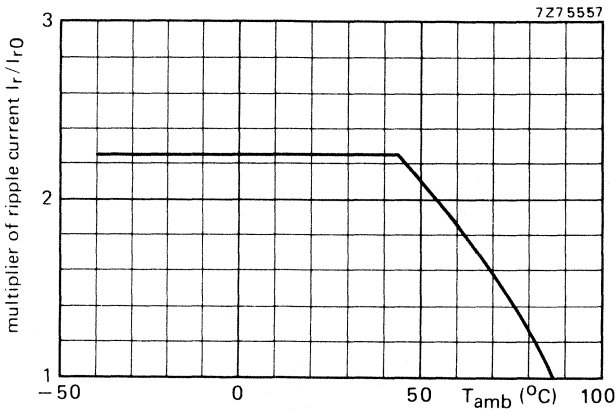


Fig. 7 Typical multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at 85 °C, 100 Hz.

<sup>▲</sup> See Introduction, section 5, "Ripple current".

\* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

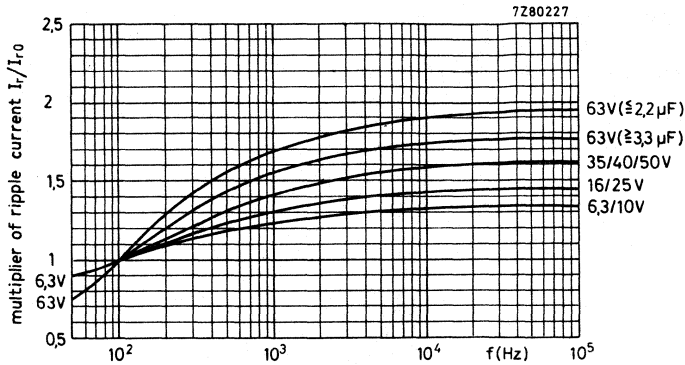


Fig. 8 Typical multiplier of ripple current as a function of frequency;  
 $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents. The following requirements must then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

#### Charge and discharge current

There is no limit on the charge or discharge rate. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

#### D.C. leakage current

Maximum d.c. leakage current 1 min after application  
of  $U_R$  at  $T_{amb} = 20$  °C

see Table 3 (0,006 CU + 3  $\mu$ A)

D.C. leakage current during continuous operation at  $U_R$ ,  
at  $T_{amb} = 25$  °C  
at  $T_{amb} = 85$  °C

approx. 0,1 x value stated in Table 3  
 $\leq$  value stated in Table 3

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40$  °C) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 3.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25^\circ\text{C}$ ,  
 measured by a four-terminal circuit (Thomson circuit)

see Table 3

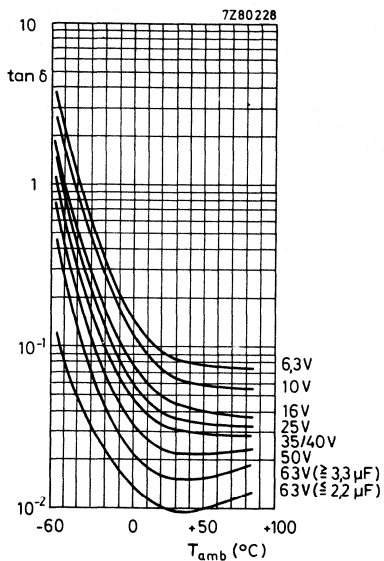


Fig. 9 Typical tan  $\delta$  at 100 Hz as a function of ambient temperature.

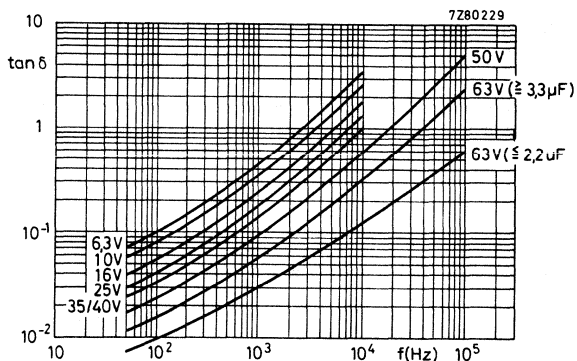


Fig. 10 Typical tan  $\delta$  as a function of frequency at  $T_{amb} = 20^\circ\text{C}$ .

**Equivalent series resistance (ESR)**

$$\text{ESR} = \tan \delta / \omega C$$

Maximum  $\tan \delta$  and  $C$  at 100 Hz and  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$

see Table 3

**Equivalent series inductance (ESL)**

Case size 11

typ. 13 nH

Case size 13

typ. 16 nH

**Impedance (Z)**

Maximum impedance at  $T_{\text{amb}} = 20 \text{ }^\circ\text{C}$ ,  $-25 \text{ }^\circ\text{C}$  and  $-40 \text{ }^\circ\text{C}$  and 10 kHz, measured by a four-terminal circuit

(Thomson circuit)

see Table 4

Maximum ratio between impedances at  $T_{\text{amb}} = -25 \text{ }^\circ\text{C}$  and  $+20 \text{ }^\circ\text{C}$ , at  $T_{\text{amb}} = -40 \text{ }^\circ\text{C}$  and  $+20 \text{ }^\circ\text{C}$ , and at  $T_{\text{amb}} = -55 \text{ }^\circ\text{C}$  and  $+20 \text{ }^\circ\text{C}$ , at 100 Hz measured by a four-terminal circuit

(Thomson circuit)

see Table 4

Table 4

| U <sub>R</sub> | nom. cap. | case size* | max. impedance at 10 kHz    |                              |                              | maximum impedance ratio at U <sub>R</sub> and 100 Hz |                            |                            |
|----------------|-----------|------------|-----------------------------|------------------------------|------------------------------|--|----------------------------|----------------------------|
|                |           |            | T <sub>amb</sub> =<br>20 °C | T <sub>amb</sub> =<br>-25 °C | T <sub>amb</sub> =<br>-40 °C | Z at -25 °C<br>Z at +20 °C                           | Z at -40 °C<br>Z at +20 °C | Z at -55 °C<br>Z at +20 °C |
| V              | μF        |            | Ω                           | Ω                            | Ω                            |  |                            |                            |
| 6,3            | 100       | 11         | 1,7                         | 9,0                          | 25,0                         | 2  | 3                          | 7                          |
|                | 330       | 13         | 0,52                        | 2,7                          | 7,6                          | 2  | 3                          | 7                          |
| 10             | 47        | 11         | 2,8                         | 11,9                         | 31,9                         | 2  | 3                          | 5                          |
|                | 68        | 11         | 1,9                         | 8,2                          | 22,1                         | 2  | 3                          | 5                          |
|                | 150       | 11         | 1,3                         | 8,0                          | 21,3                         | 2  | 3                          | 8                          |
|                | 220       | 13         | 0,59                        | 2,6                          | 6,8                          | 2  | 3                          | 5                          |
|                | 470       | 13         | 0,43                        | 2,6                          | 6,8                          | 2  | 3                          | 8                          |
| 16             | 33        | 11         | 2,7                         | 12,1                         | 33,1                         | 1,5  | 2                          | 5                          |
|                | 100       | 11         | 1,6                         | 7,5                          | 20,0                         | 1,5  | 2                          | 6                          |
|                | 150       | 13         | 0,60                        | 2,7                          | 7,3                          | 1,5  | 2                          | 5                          |
|                | 220       | 13         | 0,55                        | 2,5                          | 6,8                          | 1,5  | 2                          | 5                          |
|                | 330       | 13         | 0,48                        | 2,3                          | 6,1                          | 1,5  | 2                          | 6                          |
| 25             | 68        | 11         | 1,8                         | 8,2                          | 22,1                         | 1,5  | 2                          | 5                          |
|                | 100       | 13         | 0,70                        | 3,0                          | 9,0                          | 1,5  | 2                          | 4                          |
|                | 220       | 13         | 0,55                        | 2,6                          | 6,8                          | 1,5  | 2                          | 5                          |
| 35             | 22        | 11         | 2,7                         | 11,4                         | 34,1                         | 1,5  | 2                          | 4                          |
|                | 47        | 11         | 1,9                         | 8,5                          | 23,4                         | 1,5  | 2                          | 4                          |
|                | 150       | 13         | 0,60                        | 2,7                          | 7,3                          | 1,5  | 2                          | 4                          |
| 40             | 15        | 11         | 3,7                         | 14,7                         | 46,7                         | 1,5  | 2                          | 3                          |
|                | 68        | 13         | 0,81                        | 3,2                          | 10,3                         | 1,5  | 2                          | 3                          |
| 50             | 10        | 11         | 4,5                         | 16,0                         | 58,0                         | 1,5  | 2                          | 3                          |
|                | 33        | 11         | 2,1                         | 9,1                          | 27,3                         | 1,5  | 2                          | 3                          |
|                | 47        | 13         | 0,96                        | 3,4                          | 12,3                         | 1,5  | 2                          | 3                          |
|                | 100       | 13         | 0,70                        | 3,0                          | 9,0                          | 1,5  | 2                          | 3                          |
| 63             | 0,15      | 11         | 267                         | 867                          | 2670                         | 1,3  | 1,5                        | 2                          |
|                | 0,22      | 11         | 182                         | 591                          | 1818                         | 1,3  | 1,5                        | 2                          |
|                | 0,33      | 11         | 121                         | 394                          | 1212                         | 1,3  | 1,5                        | 2                          |
|                | 0,47      | 11         | 85,1                        | 277                          | 851                          | 1,3  | 1,5                        | 2                          |
|                | 0,68      | 11         | 58,1                        | 191                          | 588                          | 1,3  | 1,5                        | 2                          |
|                | 1,0       | 11         | 40                          | 130                          | 400                          | 1,3  | 1,5                        | 2                          |
|                | 1,5       | 11         | 26,7                        | 86,7                         | 267                          | 1,3  | 1,5                        | 2                          |
|                | 2,2       | 11         | 18,2                        | 59,1                         | 182                          | 1,3  | 1,5                        | 2                          |
|                | 3,3       | 11         | 12,1                        | 39,4                         | 121                          | 1,5  | 2                          | 3                          |
|                | 4,7       | 11         | 8,5                         | 27,2                         | 85,1                         | 1,5  | 2                          | 3                          |
|                | 6,8       | 11         | 5,9                         | 19,1                         | 58,8                         | 1,5  | 2                          | 3                          |
|                | 10        | 11         | 4,0                         | 13,0                         | 40,0                         | 1,5  | 2                          | 3                          |
|                | 22        | 11         | 2,7                         | 10,0                         | 31,8                         | 1,5  | 2                          | 3                          |
|                | 33        | 13         | 1,2                         | 3,9                          | 12,1                         | 1,5  | 2                          | 3                          |
|                | 47        | 13         | 1,0                         | 3,5                          | 11,2                         | 1,5  | 2                          | 3                          |
| 68             | 13        | 0,88       | 3,2                         | 10,3                         | 1,5                          | 2  | 3                          |                            |

\* Case size 11:  $\phi$ 5 mm x 11 mm; case size 13:  $\phi$ 8,2 mm x 11 mm (nominal dimensions).

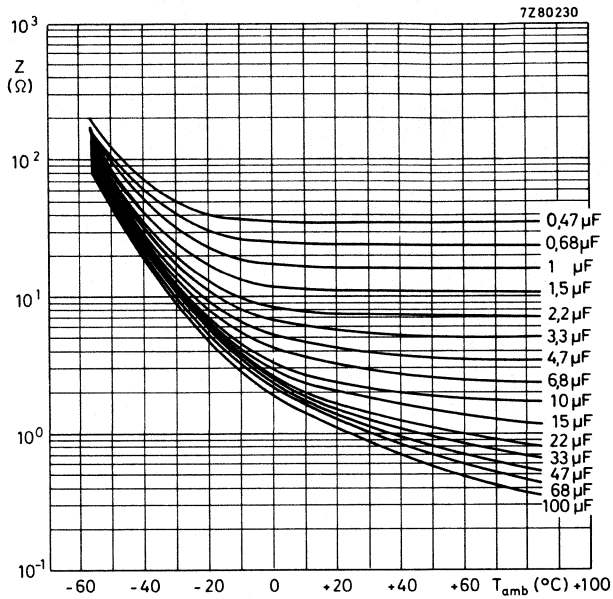


Fig. 11 Typical impedance at 10 kHz as a function of ambient temperature, case size 11.

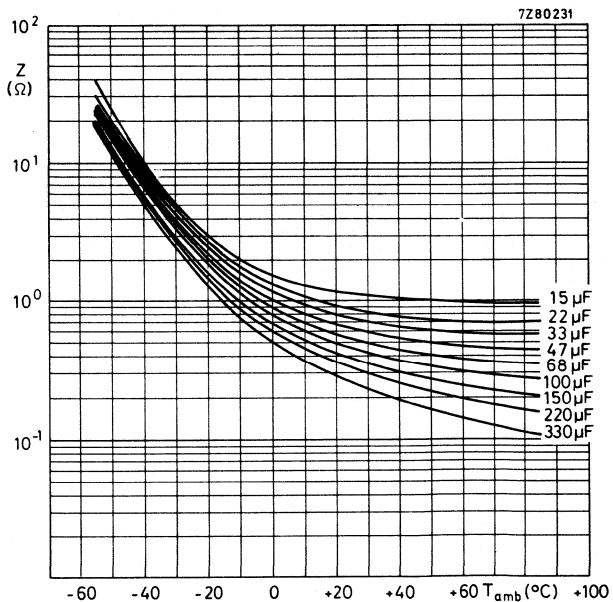


Fig. 12 Typical impedance at 10 kHz as a function of ambient temperature, case size 13.

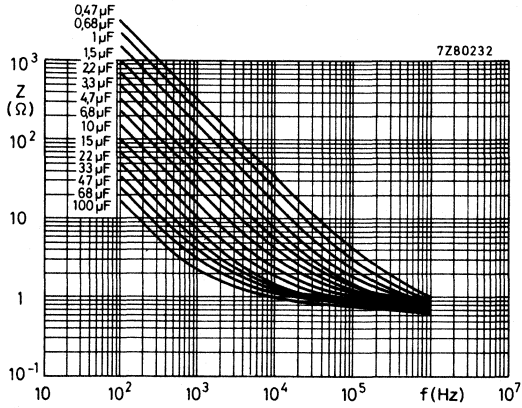


Fig. 13 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 11.

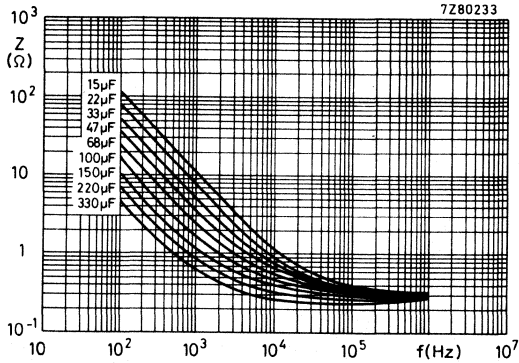


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 13.



**OPERATIONAL DATA**

|  |               |
|--|---------------|
| Category temperature range                     | -55 to +85 °C |
| Typical life time                              |               |
| at $T_{amb} = 40\text{ °C}$                    | 70 000 h      |
| at $T_{amb} = 85\text{ °C}$                    | 3000 h        |
| at $T_{amb} = 95\text{ °C}$                    | 1500 h        |
| at $T_{amb} = 105\text{ °C}$                   | 750 h         |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h         |

**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 5.

Table 5

| case size | number of capacitors |                    |                    |                               |                                |
|-----------|----------------------|--------------------|--------------------|-------------------------------|--------------------------------|
|           | style 1<br>per box   | style 2<br>per box | style 3<br>per box | style 4<br>per reel<br>(min.) | style 5<br>per ammunition pack |
| 11        | 1000                 | 1000               | 1000               | 1000                          | 2000                           |
| 13        | 1000                 | 1000               | 1000               | 500                           | 1000                           |

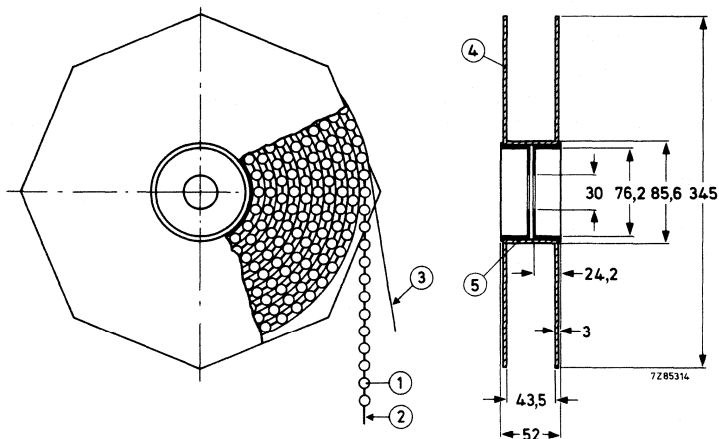


Fig. 15 Capacitors (style 4) on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder

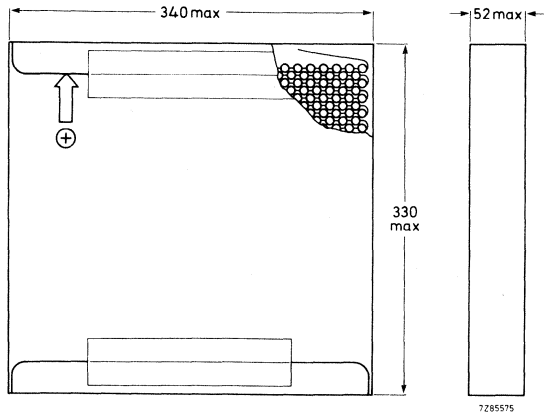


Fig. 16 Capacitors (style 5) on tape in ammunition pack.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test*, 2000 h, 85 °C, the capacitors meet the following requirements:

$\Delta C/C \leq \pm 15\%$ , for  $U_R = 10$  to 63 V,

$\Delta C/C \leq +15\%$ ,  $-25\%$  for  $U_R = 6,3$  V;

$\tan \delta \leq 130\%$  of specified value;

d.c. leakage current  $\leq$  specified value.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

Note- Capacitors 2222 036 are miniature, long-life grade.


# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

2222 037

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Single ended
- Very high CU-product per unit volume
- General applications

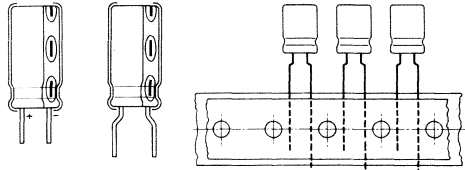

### QUICK REFERENCE DATA

Nominal capacitance range (E6 series) 0,10 to 10 000  $\mu\text{F}$

Tolerance on nominal capacitance -20 to +20%\*

Rated voltage range,  $U_R$  (R5 series) 6,3 to 100 V

Category temperature range -40 to +85  $^{\circ}\text{C}$

Endurance test at 85  $^{\circ}\text{C}$   
 $U_R = 6,3$  to 16 V 1000 h\*\*  
 $U_R = 25$  to 100 V 2000 h

Shelf life at 0 V, 85  $^{\circ}\text{C}$  500 h

Basic specifications  
 IEC 384-4, G.P. grade  
 DIN 41332/DIN 41259

Climatic category  
 IEC 68 40/085/56  
 DIN 40040 GPF

\*  $\pm 10\%$  to special order.

\*\* 2000 h under development.

| case size | nominal dimensions (mm)    |
|-----------|----------------------------|
| 11        | $\emptyset 5 \times 11$    |
| 12        | $\emptyset 6 \times 11$    |
| 13        | $\emptyset 8 \times 12$    |
| 14        | $\emptyset 10 \times 12$   |
| 15        | $\emptyset 10 \times 16$   |
| 16        | $\emptyset 10 \times 20$   |
| 17        | $\emptyset 12,5 \times 20$ |
| 18        | $\emptyset 12,5 \times 25$ |
| 19        | $\emptyset 16 \times 25$   |
| 20        | $\emptyset 16 \times 31$   |

Selection chart for  $C_{\text{nom}} - U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |    |    |     |
|-----------------------------------|-----------|----|----|----|----|----|----|----|-----|
|                                   | 6,3       | 10 | 16 | 25 | 35 | 40 | 50 | 63 | 100 |
| 0,10                              |           |    |    |    |    |    |    | 11 |     |
| 0,15                              |           |    |    |    |    |    |    | 11 |     |
| 0,22                              |           |    |    |    |    |    |    | 11 | 11  |
| 0,33                              |           |    |    |    |    |    |    | 11 |     |
| 0,47                              |           |    |    |    |    |    |    | 11 | 11  |
| 0,68                              |           |    |    |    |    |    |    | 11 |     |
| 1                                 |           |    |    |    |    |    |    | 11 | 11  |
| 1,5                               |           |    |    |    |    |    |    | 11 | 11  |
| 2,2                               |           |    |    |    |    |    |    | 11 | 11  |
| 3,3                               |           |    |    |    |    |    |    | 11 | 11  |
| 4,7                               |           |    |    |    |    |    |    | 11 | 11  |
| 6,8                               |           |    |    |    |    |    |    | 11 | 11  |
| 10                                |           |    |    |    |    |    | 11 | 11 | 12  |
| 15                                |           |    |    |    |    | 11 | 11 | 11 | 13  |
| 22                                |           |    |    |    | 11 | 11 | 12 | 12 | 13  |
| 33                                |           |    | 11 |    | 11 | 12 | 12 | 13 | 14  |
| 47                                |           | 11 |    |    |    | 12 | 13 | 13 | 15  |
| 68                                | 11        |    | 11 | 12 |    | 13 | 13 | 14 | 15  |
| 100                               |           | 11 | 12 | 13 |    | 13 |    | 14 | 16  |
| 150                               | 12        | 12 | 13 | 13 |    | 14 |    | 15 | 17  |
| 220                               | 12        | 13 | 13 |    | 14 |    | 15 | 16 | 18  |
| 330                               | 13        | 13 | 14 |    | 15 | 16 |    | 17 | 19  |
| 470                               | 13        |    | 14 |    | 16 | 17 | 17 | 18 | 20  |
| 680                               |           | 14 | 15 |    | 17 | 18 | 18 | 19 |     |
| 1000                              |           | 15 | 16 | 17 | 18 | 19 | 19 | 20 |     |
| 1500                              | 16        |    | 17 | 18 | 19 | 20 |    |    |     |
| 2200                              | 17        |    | 18 | 19 | 20 |    |    |    |     |
| 3300                              |           | 18 | 19 | 20 |    |    |    |    |     |
| 4700                              |           | 19 | 20 |    |    |    |    |    |     |
| 6800                              | 19        | 20 |    |    |    |    |    |    |     |
| 10 000                            | 20        |    |    |    |    |    |    |    |     |

**APPLICATION**

These capacitors with very high CU-product per unit volume are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits. Other applications are in timing and delay circuits. The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an insulated aluminium case.

**MECHANICAL DATA**

Dimensions in mm

The capacitor is available in 6 styles:

- style 1: long leads; in boxes;
- style 2: straight short leads; non preferred, in boxes;
- style 3: bent short leads only case sizes 11, 12 and 13; non preferred, in boxes;
- style 4: long leads; on tape on reel, positive leading; only case sizes 11 to 13;
- style 5: long leads; on tape in ammunition pack; only case sizes 11 to 13;
- style 6: long leads; on tape on reel, negative leading; only case sizes 11 to 13.

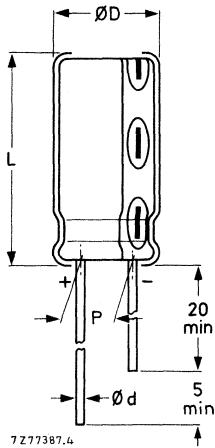


Fig. 1 Style 1; see Table 1 for dimensions d, D, L and P.

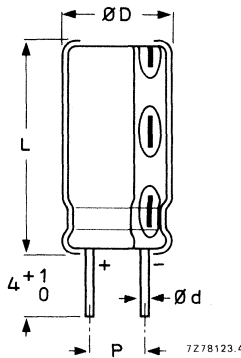


Fig. 2 Style 2; non preferred, see Table 1 for dimensions d, D, L and P.

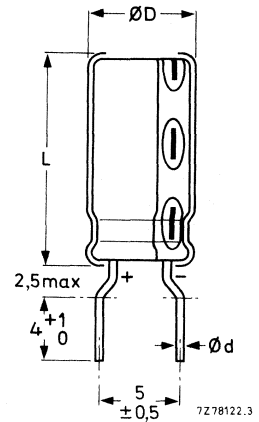



Fig. 3 Style 3, case sizes 11, 12 and 13; non preferred, see Table 1 for dimensions d, D and L.

**Table 1**

| case size | dimensions |                  |                  |     | mass g |
|-----------|------------|------------------|------------------|-----|--------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |        |
| 11        | 0,5*       | 5,5              | 12,0             | 2,0 | ± 0,5  |
| 12        | 0,6        | 6,5              | 12,0             | 2,5 |        |
| 13        | 0,6        | 8,5              | 12,5             | 3,5 |        |
| 14        | 0,6        | 10,5             | 12,5             | 5,0 |        |
| 15        | 0,6        | 10,5             | 17,0             | 5,0 |        |

| case size | dimensions |                  |                  |     | mass g |
|-----------|------------|------------------|------------------|-----|--------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |        |
| 16        | 0,6        | 10,5             | 21,0             | 5,0 | ± 0,5  |
| 17        | 0,6        | 13,0             | 21,0             | 5,0 |        |
| 18        | 0,6        | 13,0             | 26,0             | 5,0 |        |
| 19        | 0,8        | 16,5             | 26,0             | 7,5 |        |
| 20        | 0,8        | 16,5             | 32,0             | 7,5 |        |

\* 0,6 mm under consideration.

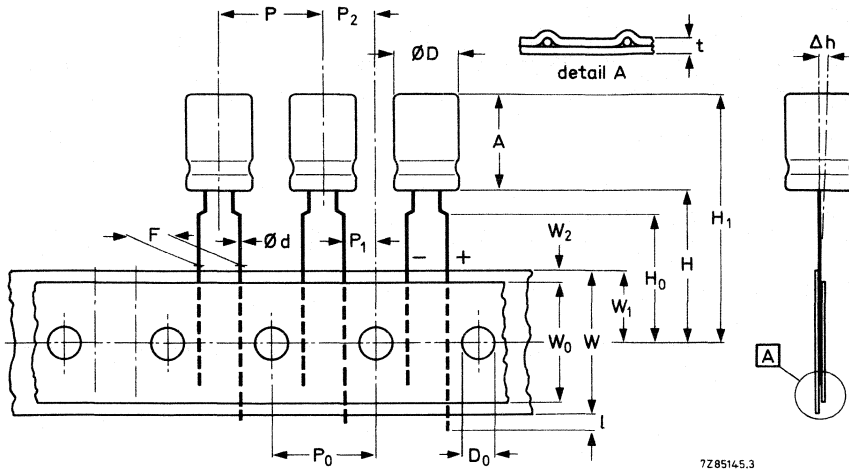

7Z85145.3

→ direction of tape transport (positive leading)

Fig. 4 Styles 4, 5 and 6, case sizes 11 to 13; see Table 2 for dimensions. For style 6 the tape transport is in opposite direction (negative leading).

Table 2

|                                      | symbol         | case size |      |      | tol.     |
|--------------------------------------|----------------|-----------|------|------|----------|
|                                      |                | 11        | 12   | 13   |          |
| Body diameter                        | D              | 5,5       | 6,5  | 8,5  | max.     |
| Body height                          | A              | 12,0      | 12,0 | 12,5 | max.     |
| Lead-wire diameter                   | d              | 0,5*      | 0,6  | 0,6  | ± 0,05   |
| Pitch of component                   | P              | 12,7      | 12,7 | 12,7 | ± 1,0    |
| Feed-hole pitch                      | P <sub>0</sub> | 12,7      | 12,7 | 12,7 | ± 0,2**  |
| Hole centre to lead                  | P <sub>1</sub> | 3,85      | 3,85 | 3,85 | ± 0,5    |
| Feed hole centre to component centre | P <sub>2</sub> | 6,35      | 6,35 | 6,35 | ± 1,0    |
| Lead-to-lead distance                | F              | 5,0       | 5,0  | 5,0  | + 0,6/-0 |
| Component alignment                  | Δh             | 0         | 0    | 0    | ± 1,0    |
| Tape width                           | W              | 18,0      | 18,0 | 18,0 | ± 0,5    |
| Hold-down tape width                 | W <sub>0</sub> | 12,5      | 12,5 | 12,5 | min. *** |
| Hole position                        | W <sub>1</sub> | 9,0       | 9,0  | 9,0  | ± 0,5    |
| Hold-down tape position              | W <sub>2</sub> | 2,5       | 2,5  | 2,5  | max.     |
| Height of component from tape centre | H              | 18,0      | 18,0 | 18,0 | + 1,5/-0 |
| Lead-wire clinch height              | H <sub>0</sub> | 16,0      | 16,0 | 16,0 | ± 0,5    |
| Component height                     | H <sub>1</sub> | 32,0      | 32,0 | 32,0 | max.     |
| Lead-wire protrusion                 | l              | 2,0       | 2,0  | 2,0  | max.     |
| Feed-hole diameter                   | D <sub>0</sub> | 4,0       | 4,0  | 4,0  | ± 0,2    |
| Total tape thickness                 | t              | 0,9       | 0,9  | 0,9  | max.     |

\* 0,6 mm under consideration.

\*\* Cumulative pitch error: ± 1 mm/20 pitches.

\*\*\* Other widths under consideration.

**Marking**

The capacitors are marked with: nominal capacitance, rated voltage, a symbol to identify the negative terminal, group number (037), code for factory of origin, name of manufacturer and date code (year and month) according to IEC 62.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**





Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

DEVELOPMENT DATA

Table 3

| UR | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max.d.c.leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 037 followed by   |   |   |                  |   |                   |
|----|-------------------------|--|---|--------------------|--|-----------|-----------|---|---|---|------------------|---|-------------------|
|    |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1  | style 2  | style 3  | on reel* style 4 | in ammopack style 5  | on reel** style 6 |
|    |                         |  |   |                    |  |           |           |   |   |   |                  |   |                   |
| V  | 6,3                     | 57   | 7,3   | 0,24               | 8,8  | 11        | 53689     | 83689   | 63689   | 23689   | 33689            | 43689   |                   |
|    | 150                     | 92   | 12  | 0,24               | 4,0  | 12        | 53151     | 83151   | 63151   | 23151   | 33151            | 43151   |                   |
|    | 220                     | 110  | 17  | 0,24               | 2,7  | 12        | 53221     | 83221   | 63221   | 23221   | 33221            | 43221   |                   |
|    | 330                     | 160  | 24  | 0,24               | 1,8  | 13        | 53331     | 83331   | 63331   | 23331   | 33331            | 43331   |                   |
|    | 470                     | 200  | 33  | 0,24               | 1,3  | 13        | 53471     | 83471   | 63471   | 23471   | 33471            | 43471   |                   |
|    | 1 500                   | 480  | 98  | 0,25               | 0,44   | 16        | 53152     | 63152   |   |   |                  |   |                   |
|    | 2 200                   | 640  | 140   | 0,26               | 0,31   | 17        | 53222     | 63222   |   |   |                  |   |                   |
|    | 6 800                   | 1200   | 430   | 0,35               | 0,12   | 19        | 53682     | 63682   |   |   |                  |   |                   |
|    | 10 000                  | 1500   | 630   | 0,42               | 0,10   | 20        | 53103     | 63103   |   |   |                  |   |                   |
|    | 10                      | 47   | 51  | 7,7                | 0,20   | 9,6       | 11        | 54479   | 84479   | 64479   | 24479            | 34479   | 44479             |
|    | 100                     | 75   | 13  | 0,20               | 4,5  | 11        | 54101     | 84101   | 64101   | 24101   | 34101            | 44101   |                   |
|    | 150                     | 100  | 18  | 0,20               | 3,0  | 12        | 54151     | 84151   | 64151   | 24151   | 34151            | 44151   |                   |
|    | 220                     | 150  | 25  | 0,20               | 2,0  | 13        | 54221     | 84221   | 64221   | 24221   | 34221            | 44221   |                   |
|    | 330                     | 180  | 36  | 0,20               | 1,4  | 13        | 54331     | 84331   | 64331   | 24331   | 34331            | 44331   |                   |
|    | 680                     | 300  | 71  | 0,20               | 0,66   | 14        | 54681     | 64681   |   |   |                  |   |                   |
|    | 1 000                   | 400  | 100   | 0,20               | 0,45   | 15        | 54102     | 64102   |   |   |                  |   |                   |
|    | 3 300                   | 900  | 330   | 0,24               | 0,18   | 18        | 54332     | 64332   |   |   |                  |   |                   |
|    | 4 700                   | 1100   | 470   | 0,28               | 0,13   | 19        | 54472     | 64472   |   |   |                  |   |                   |
|    | 6 800                   | 1400   | 680   | 0,32               | 0,10   | 20        | 54682     | 64682   |   |   |                  |   |                   |

\* Positive leading.

\*\* Negative leading.

Table 3 (continued)





| UR   | nom. cap. $\mu\text{F}$ | max. r. m. s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at $U_R$ after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 037 followed by |         |         |                  |                    |                   |       |
|------|-------------------------|--|--|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|------------------|--------------------|-------------------|-------|
|      |                         |  |  |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel* style 4 | in ammpack style 5 | on reel** style 6 |       |
| 16   | 33                      | 48   | 8,3  | 0,16               |  | 9,7       | 11        | 55339                                 | 85339   | 65339   | 25339            | 35339              | 45339             |       |
|      | 68                      | 69   | 14   | 0,16               | 4,7  | 4,7       | 11        | 55689                                 | 85689   | 65689   | 25689            | 35689              | 45689             |       |
|      | 100                     | 92   | 19   | 0,16               | 3,2  | 3,2       | 12        | 55101                                 | 85101   | 65101   | 25101            | 35101              | 45101             |       |
|      | 150                     | 140  | 27   | 0,16               | 2,1  | 2,1       | 13        | 55151                                 | 85151   | 65151   | 25151            | 35151              | 45151             |       |
|      | 220                     | 160  | 38   | 0,16               | 1,5  | 1,5       | 13        | 55221                                 | 85221   | 65221   | 25221            | 35221              | 45221             |       |
|      | 330                     | 230  | 56   | 0,16               | 0,97   | 0,97      | 14        | 55331                                 | 85331   |         |                  |                    |                   |       |
|      | 470                     | 370  | 78   | 0,16               | 0,68   | 0,68      | 14        | 55471                                 | 85471   |         |                  |                    |                   |       |
|      | 680                     | 490  | 110  | 0,16               | 0,47   | 0,47      | 15        | 55681                                 | 85681   |         |                  |                    |                   |       |
|      | 1000                    | 490  | 160  | 0,16               | 0,32   | 0,32      | 16        | 55102                                 | 85102   |         |                  |                    |                   |       |
|      | 1500                    | 650  | 240  | 0,17               | 0,29   | 0,29      | 17        | 55152                                 | 85152   |         |                  |                    |                   |       |
|      | 2200                    | 840  | 360  | 0,20               | 0,21   | 0,21      | 18        | 55222                                 | 85222   |         |                  |                    |                   |       |
|      | 3300                    | 1100   | 530  | 0,20               | 0,15   | 0,15      | 19        | 55332                                 | 85332   |         |                  |                    |                   |       |
|      | 4700                    | 1300   | 760  | 0,24               | 0,11   | 0,11      | 20        | 55472                                 | 85472   |         |                  |                    |                   |       |
|      | 25                      | 47   | 62   | 15                 | 0,14   |           | 4,7       | 11                                    | 56479   | 86479   | 66479            | 26479              | 36479             | 46479 |
|      |                         | 68   | 81   | 20                 | 0,14   | 3,2       | 3,2       | 12                                    | 56689   | 86689   | 66689            | 26689              | 36689             | 46689 |
|      |                         | 100  | 120  | 28                 | 0,14   | 2,2       | 2,2       | 13                                    | 56101   | 86101   | 66101            | 26101              | 36101             | 46101 |
| 150  |                         | 140  | 41   | 0,14               | 1,5  | 1,5       | 13        | 56151                                 | 86151   | 66151   | 26151            | 36151              | 46151             |       |
| 2200 | 1000                    | 590  | 0,14   | 0,22               | 0,22   | 17        | 56102     | 86102                                 |         |         |                  |                    |                   |       |
| 1500 | 760                     | 380  | 0,15   | 0,24               | 0,24   | 18        | 56152     | 86152                                 |         |         |                  |                    |                   |       |
| 2200 | 1000                    | 550  | 0,16   | 0,17               | 0,17   | 19        | 56222     | 86222                                 |         |         |                  |                    |                   |       |
| 3300 | 1300                    | 830  | 0,18   | 0,12               | 0,12   | 20        | 56332     | 86332                                 |         |         |                  |                    |                   |       |

\* Positive leading.  
\*\* Negative leading.



DEVELOPMENT DATA


Table 3 (continued)

| UR   | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 037 followed by   |   |   |                  |   |       |                   |
|------|-------------------------|--|---|--------------------|--|-----------|-----------|---|---|---|------------------|---|-------|-------------------|
|      |                         |  |   |                    | at 1 kHz   | at 10 kHz |           |  | style 2  | style 3  | on reel* style 4 | in ammopack style 5  |       | on reel** style 6 |
|      |                         |  |   |                    |  |           |           |   |   |   |                  | 30229   | 30229 |                   |
| V    | 22                      | 45   | 11  | 0,12               | 6,8  | 8,7       | 11        | 50229   | 80229   | 60229   | 20229            | 30229   | 40229 |                   |
|      | 33                      | 56   | 15  | 0,12               | 4,5  | 5,9       | 11        | 50339   | 80339   | 60339   | 20339            | 30339   | 40339 |                   |
|      | 220                     | 220  | 80  | 0,12               | 0,68   | 3,9       | 12        | 50221   | 60221   |   |                  |   |       |                   |
|      | 330                     | 300  | 120   | 0,12               | 0,45   | 2,8       | 12        | 50331   | 60331   |   |                  |   |       |                   |
|      | 470                     | 390  | 170   | 0,12               | 0,32   | 1,9       | 13        | 50471   | 60471   |   |                  |   |       |                   |
|      | 680                     | 520  | 240   | 0,12               | 0,22   | 1,3       | 13        | 50681   | 60681   |   |                  |   |       |                   |
|      | 1000                    | 690  | 250   | 0,12               | 0,15   | 0,87      | 14        | 50102   | 60102   |   |                  |   |       |                   |
|      | 1500                    | 940  | 530   | 0,13               | 0,21   | 0,39      | 16        | 50152   | 60152   |   |                  |   |       |                   |
|      | 2200                    | 1200   | 770   | 0,14               | 0,14   | 0,28      | 17        | 50222   | 60222   |   |                  |   |       |                   |
|      | 40                      | 15   | 38  | 9                  | 0,12   | 8,7       | 8,7       | 11  | 57159   | 87159   | 67159            | 27159   | 37159 | 47159             |
| 22   |                         | 45   | 12  | 0,12               | 5,9  | 5,9       | 11        | 57229   | 87229   | 67229   | 27229            | 37229   | 47229 |                   |
| 33   |                         | 61   | 16  | 0,12               | 3,9  | 3,9       | 12        | 57339   | 87339   | 67339   | 27339            | 37339   | 47339 |                   |
| 47   |                         | 73   | 22  | 0,12               | 2,8  | 2,8       | 12        | 57479   | 87479   | 67479   | 27479            | 37479   | 47479 |                   |
| 68   |                         | 100  | 30  | 0,12               | 1,9  | 1,9       | 13        | 57689   | 87689   | 67689   | 27689            | 37689   | 47689 |                   |
| 100  |                         | 130  | 43  | 0,12               | 1,3  | 1,3       | 13        | 57101   | 87101   | 67101   | 27101            | 37101   | 47101 |                   |
| 150  |                         | 180  | 63  | 0,12               | 0,87   | 0,87      | 14        | 57151   | 87151   |   |                  |   |       |                   |
| 330  |                         | 320  | 140   | 0,12               | 0,39   | 0,39      | 16        | 57331   | 67331   |   |                  |   |       |                   |
| 470  |                         | 440  | 190   | 0,12               | 0,28   | 0,28      | 17        | 57471   | 67471   |   |                  |   |       |                   |
| 680  |                         | 570  | 280   | 0,12               | 0,19   | 0,19      | 18        | 57681   | 67681   |   |                  |   |       |                   |
| 1000 | 870                     | 400  | 0,12  | 0,13               | 0,13   | 19        | 57102     | 67102   |   |   |                  |   |       |                   |
| 1500 | 1000                    | 600  | 0,13  | 0,18               | 0,18   | 20        | 57152     | 67152   |   |   |                  |   |       |                   |

\* Positive leading.  
\*\* Negative leading.

Table 3 (continued)

| UR | nom. cap. $\mu F$ | max. r.m.s. ripple current at $T_{amb} = 85^{\circ}C$ mA | max. d.c. leakage current at $U_R$ after 1 min $\mu A$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{amb} = 20^{\circ}C$ |           | case size | catalogue number 2222 037 followed by |         |         |                  |                     |                   |
|----|-------------------|--|--|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|------------------|---------------------|-------------------|
|    |                   |  |  |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel* style 4 | in ammopack style 5 | on reel** style 6 |
| V  | 50                | 34   | 8  | 0,10               |  | 9,5       | 11        | 51109                                 | 81109   | 61109   | 21109            | 31109               | 41109             |
|    |                   | 54   | 14   | 0,10               |  | 4,3       | 12        | 51229                                 | 81229   | 61229   | 21229            | 31229               | 41229             |
|    |                   | 67   | 20   | 0,10               |  | 2,9       | 12        | 51339                                 | 81339   | 61339   | 21339            | 31339               | 41339             |
|    |                   | 96   | 27   | 0,10               |  | 2,0       | 13        | 51479                                 | 81479   | 61479   | 21479            | 31479               | 41479             |
|    |                   | 120  | 37   | 0,10               |  | 1,4       | 13        | 51689                                 | 81689   | 61689   | 21689            | 31689               | 41689             |
|    |                   | 260  | 110  | 0,10               |  | 0,43      | 15        | 51221                                 | 61221   |         |                  |                     |                   |
|    |                   | 480  | 240  | 0,10               |  | 0,20      | 17        | 51471                                 | 61471   |         |                  |                     |                   |
|    |                   | 680  | 630  | 0,10               |  | 0,14      | 18        | 51681                                 | 61681   |         |                  |                     |                   |
|    |                   | 1000   | 680  | 500                | 0,10   | 0,10      | 19        | 51102                                 | 61102   |         |                  |                     |                   |



\* Positive leading.  
 \*\* Negative leading.

Table 3 (continued)

| UR | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at $U_R$ after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 037 followed by |         |         |                  |                    | on reel** style 6 |
|----|-------------------------|--|--|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|------------------|--------------------|-------------------|
|    |                         |  |  |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel* style 4 | in ammpack style 5 |                   |
|    |                         |  |  |                    |  |           |           |                                       |         |         |                  |                    |                   |
| V  | 63                      | 3,5  | 3,1  | 0,09               | 800  | 800       | 11        | 58107                                 | 88107   | 68107   | 28107            | 38107              | 48107             |
|    |                         | 4,3  | 3,1  | 0,09               | 530  | 530       | 11        | 58157                                 | 88157   | 68157   | 28157            | 38157              | 48157             |
|    |                         | 5,2  | 3,1  | 0,09               | 360  | 360       | 11        | 58227                                 | 88227   | 68227   | 28227            | 38227              | 48227             |
|    |                         | 6,4  | 3,2  | 0,09               | 240  | 240       | 11        | 58337                                 | 88337   | 68337   | 28337            | 38337              | 48337             |
|    |                         | 7,7  | 3,3  | 0,09               | 170  | 170       | 11        | 58477                                 | 88477   | 68477   | 28477            | 38477              | 48477             |
|    |                         | 9,2  | 3,4  | 0,09               | 120  | 120       | 11        | 58687                                 | 88687   | 68687   | 28687            | 38687              | 48687             |
|    |                         | 11   | 3,6  | 0,09               | 80   | 80        | 11        | 58108                                 | 88108   | 68108   | 28108            | 38108              | 48108             |
|    |                         | 14   | 3,9  | 0,09               | 53   | 53        | 11        | 58158                                 | 88158   | 68158   | 28158            | 38158              | 48158             |
|    |                         | 17   | 4,4  | 0,09               | 36   | 36        | 11        | 58228                                 | 88228   | 68228   | 28228            | 38228              | 48228             |
|    |                         | 20   | 5,1  | 0,09               | 24   | 24        | 11        | 58338                                 | 88338   | 68338   | 28338            | 38338              | 48338             |
|    |                         | 24   | 6,0  | 0,09               | 17   | 17        | 11        | 58478                                 | 88478   | 68478   | 28478            | 38478              | 48478             |
|    |                         | 29   | 7,3  | 0,09               | 12   | 12        | 11        | 58688                                 | 88688   | 68688   | 28688            | 38688              | 48688             |
|    |                         | 35   | 9,3  | 0,09               | 8,0  | 8,0       | 11        | 58109                                 | 88109   | 68109   | 28109            | 38109              | 48109             |
|    |                         | 43   | 12   | 0,09               | 5,3  | 5,3       | 11        | 58159                                 | 88159   | 68159   | 28159            | 38159              | 48159             |
|    |                         | 57   | 17   | 0,09               | 3,6  | 3,6       | 12        | 58229                                 | 88229   | 68229   | 28229            | 38229              | 48229             |
|    |                         | 85   | 24   | 0,09               | 2,4  | 2,4       | 13        | 58339                                 | 88339   | 68339   | 28339            | 38339              | 48339             |
|    |                         | 100  | 33   | 0,09               | 1,7  | 1,7       | 13        | 58479                                 | 88479   | 68479   | 28479            | 38479              | 48479             |
|    |                         | 140  | 46   | 0,09               | 1,2  | 1,2       | 14        | 58689                                 | 88689   | 68689   | 28689            | 38689              | 48689             |
|    |                         | 170  | 66   | 0,09               | 0,80   | 0,80      | 14        | 58101                                 | 68101   | 58101   | 68101            | 58101              | 68101             |
|    |                         | 230  | 98   | 0,09               | 0,53   | 0,53      | 15        | 58151                                 | 68151   | 58151   | 68151            | 58151              | 68151             |
|    | 300                     | 140  | 0,09   | 0,36               | 0,36   | 16        | 58221     | 68221                                 | 58221   | 68221   | 58221            | 68221              |                   |
|    | 420                     | 210  | 0,09   | 0,24               | 0,24   | 17        | 58331     | 68331                                 | 58331   | 68331   | 58331            | 68331              |                   |
|    | 550                     | 300  | 0,09   | 0,17               | 0,17   | 18        | 58471     | 68471                                 | 58471   | 68471   | 58471            | 68471              |                   |
|    | 760                     | 430  | 0,09   | 0,12               | 0,12   | 19        | 58681     | 68681                                 | 58681   | 68681   | 58681            | 68681              |                   |
|    | 1000                    | 630  | 0,09   | 0,08               | 0,08   | 20        | 58102     | 68102                                 | 58102   | 68102   | 58102            | 68102              |                   |

\* Positive leading.  
\*\* Negative leading.

Table 3 (continued)

| UR  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. impedance ( $\Omega$ ) at $T_{\text{amb}} = 20^\circ\text{C}$ |           | case size | catalogue number 2222 037 followed by |         |         |                  |                    |                   |
|-----|-------------------------|--|---|--------------------|--|-----------|-----------|---------------------------------------|---------|---------|------------------|--------------------|-------------------|
|     |                         |  |   |                    | at 1 kHz   | at 10 kHz |           | style 1                               | style 2 | style 3 | on reel* style 4 | in ammpack style 5 | on reel** style 6 |
| 100 | 0,22                    | 5,9  | 3,2   | 0,07               | 270  |           | 11        | 59227                                 | 89227   | 69227   | 29227            | 39227              | 49227             |
|     | 0,47                    | 8,7  | 3,5   | 0,07               | 130  |           | 11        | 59477                                 | 89477   | 69477   | 29477            | 39477              | 49477             |
|     | 1,0                     | 13   | 4   | 0,07               | 60   |           | 11        | 59108                                 | 89108   | 69108   | 29108            | 39108              | 49108             |
|     | 1,5                     | 16   | 4,5   | 0,07               | 40   |           | 11        | 59158                                 | 89158   | 69158   | 29158            | 39158              | 49158             |
|     | 2,2                     | 19   | 5,2   | 0,07               | 27   |           | 11        | 59228                                 | 89228   | 69228   | 29228            | 39228              | 49228             |
|     | 3,3                     | 23   | 6,3   | 0,07               | 18   |           | 11        | 59338                                 | 89338   | 69338   | 29338            | 39338              | 49338             |
|     | 4,7                     | 27   | 7,7   | 0,07               | 13   |           | 11        | 59478                                 | 89478   | 69478   | 29478            | 39478              | 49478             |
|     | 6,8                     | 33   | 9,8   | 0,07               | 8,8  |           | 11        | 59688                                 | 89688   | 69688   | 29688            | 39688              | 49688             |
|     | 10                      | 44   | 13  | 0,07               | 6,0  |           | 12        | 59109                                 | 89109   | 69109   | 29109            | 39109              | 49109             |
|     | 15                      | 65   | 18  | 0,07               | 4,0  |           | 13        | 59159                                 | 89159   | 69159   | 29159            | 39159              | 49159             |
|     | 22                      | 78   | 25  | 0,07               | 2,7  |           | 13        | 59229                                 | 89229   | 69229   | 29229            | 39229              | 49229             |
|     | 33                      | 110  | 36  | 0,07               | 1,8  |           | 14        | 59339                                 | 89339   | 69339   |                  |                    |                   |
|     | 47                      | 150  | 50  | 0,07               | 1,3  |           | 15        | 59479                                 | 89479   | 69479   |                  |                    |                   |
|     | 68                      | 180  | 71  | 0,07               | 0,88   |           | 15        | 59689                                 | 89689   | 69689   |                  |                    |                   |
|     | 100                     | 230  | 100   | 0,07               | 0,60   |           | 16        | 59101                                 | 89101   | 69101   |                  |                    |                   |
|     | 150                     | 320  | 150   | 0,07               | 0,40   |           | 17        | 59151                                 | 89151   | 69151   |                  |                    |                   |
|     | 220                     | 430  | 220   | 0,07               | 0,27   |           | 18        | 59221                                 | 89221   | 69221   |                  |                    |                   |
|     | 330                     | 600  | 330   | 0,07               | 0,18   |           | 19        | 59331                                 | 89331   | 69331   |                  |                    |                   |
|     | 470                     | 780  | 470   | 0,07               | 0,13   |           | 20        | 59471                                 | 89471   | 69471   |                  |                    |                   |

\* Positive leading.  
\*\* Negative leading.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 3

-20 to +20%

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature <sup>▲</sup> ← |                               |
|---------------------------------|-------------------------------|
| < 50 °C                         | 50 to 95 °C                   |
| $1,15 \times U_R$               | $U_R$                         |
| $1,15 \times U_R$               | $U_R$                         |
|                                 | 1 V<br>between $U_R$ and -1 V |
|                                 | $1,15 \times U_R$             |
|                                 | 1 V                           |

**Ripple current \*\***

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85\text{ }^\circ\text{C}$

see Table 3

DEVELOPMENT DATA

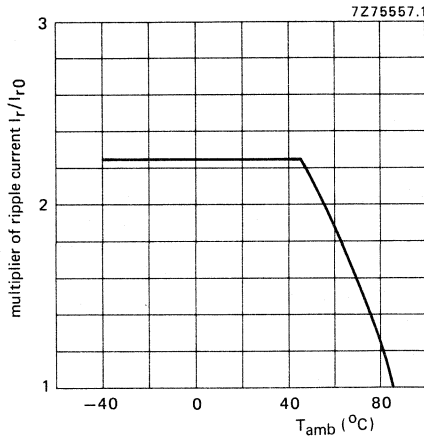


Fig. 5 Typical multiplier of ripple current as a function of ambient temperature;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

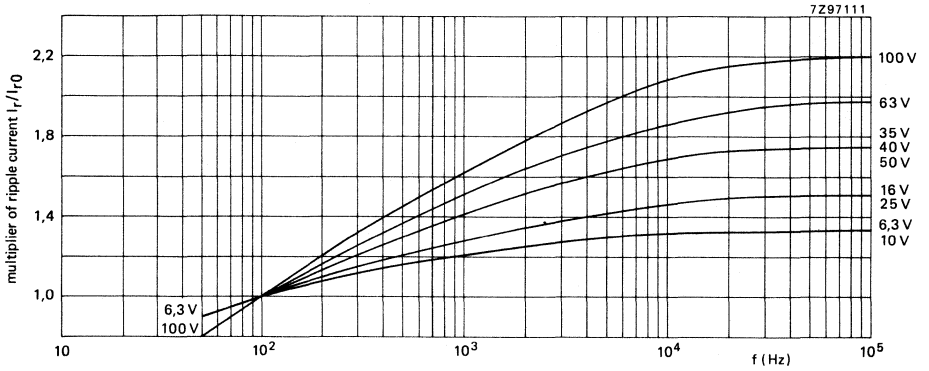


Fig. 6 Typical multiplier of ripple current as a function of frequency;  
 $I_{r0}$  = ripple current at 85 °C; 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r \max^2$$

$I_r \max$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements).

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application  
 of  $U_R$  at  $T_{amb} = 20\text{ °C}$

see Table 3 (0,01 CU + 3  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ ,  
 at  $T_{amb} = 25\text{ °C}$   
 at  $T_{amb} = 85\text{ °C}$

approx. 0,1 x value stated in Table 3  
 $\leq$  value stated in Table 3

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ °C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 3.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 3

**Equivalent series resistance (ESR)**

$ESR = \tan \delta / \omega C$

Maximum tan  $\delta$  and C at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 3

**Equivalent series inductance (ESL)**

Case sizes 11, 12, 13

typ. 13 nH

Case sizes 14, 15, 16

typ. 16 nH

Case sizes 17, 18, 19, 20

typ. 18 nH

**Impedance (Z)**

Maximum impedance at  $T_{amb} = 20\text{ }^\circ\text{C}$  and 10 kHz ( $C_{nom} \leq 1000\text{ }\mu\text{F}$ ) and 1 kHz ( $C_{nom} > 1000\text{ }\mu\text{F}$ ),

measured by means of a four-terminal circuit (Thomson circuit)

see Table 3

$z = Z \times C_{nom}$

see Table 4

Maximum ratio between impedances at  $T_{amb} = -25\text{ }^\circ\text{C}$  and  $+20\text{ }^\circ\text{C}$ , and at  $T_{amb} = -40\text{ }^\circ\text{C}$  and  $+20\text{ }^\circ\text{C}$ , at 100 Hz measured by means of a four-terminal circuit (Thomson circuit)

see Table 5

**Table 4**

|  | $T_{amb}$            | $z = Z \times C_{nom} (\Omega \mu\text{F}) \text{ at } U_R$ |      |      |      |      |      |      |      |       |
|--|----------------------|---|------|------|------|------|------|------|------|-------|
|  |                      | 6,3 V   | 10 V | 16 V | 25 V | 35 V | 40 V | 50 V | 63 V | 100 V |
| $C_{nom} > 1000\text{ }\mu\text{F}$ ,<br>measured at 1 kHz*    | +20 $^\circ\text{C}$ | 650   | 530  | 430  | 350  | 300  | 270  | 260  | 250  | 240   |
|  | -25 $^\circ\text{C}$ | 5500  | 4000 | 2700 | 1700 | 1200 | 1000 | 700  | 550  | 500   |
| $C_{nom} \leq 1000\text{ }\mu\text{F}$ ,<br>measured at 10 kHz | +20 $^\circ\text{C}$ | 600   | 450  | 320  | 220  | 150  | 130  | 95   | 80   | 60    |
|  | -25 $^\circ\text{C}$ | 5500  | 4000 | 2700 | 1700 | 1200 | 950  | 650  | 500  | 450   |

**Table 5**

|  | maximum impedance ratio at $U_R$ and 100 Hz |      |      |      |      |      |      |      |       |
|--|---|------|------|------|------|------|------|------|-------|
|  | 6,3 V                                       | 10 V | 16 V | 25 V | 35 V | 40 V | 50 V | 63 V | 100 V |
| $Z \text{ at } -25\text{ }^\circ\text{C}$<br>$Z \text{ at } +20\text{ }^\circ\text{C}$ | 4   | 3    | 2    | 2    | 2    | 2    | 2    | 2    | 2     |
| $Z \text{ at } -40\text{ }^\circ\text{C}$<br>$Z \text{ at } +20\text{ }^\circ\text{C}$ | 8   | 6    | 5    | 4    | 4    | 4    | 3    | 3    | 3     |

\* Values shall be increased by 5% per 1000  $\mu\text{F}$ .

DEVELOPMENT DATA

**OPERATIONAL DATA**

Category temperature range

-40 to +85 °C

Typical life time

at  $T_{amb} = 40\text{ °C}$

at  $T_{amb} = 85\text{ °C}$

at  $T_{amb} = 95\text{ °C}$

at  $T_{amb} = 105\text{ °C}$

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| $U_R = 25\text{ to }100\text{ V}$ | $U_R = 6,3\text{ to }16\text{ V}$ |
|-----------------------------------|-----------------------------------|

|          |          |
|----------|----------|
| 70 000 h | 35 000 h |
|----------|----------|

|        |        |
|--------|--------|
| 3000 h | 1500 h |
|--------|--------|

|        |       |
|--------|-------|
| 1500 h | 750 h |
|--------|-------|

|       |       |
|-------|-------|
| 750 h | 400 h |
|-------|-------|

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$

|       |       |
|-------|-------|
| 500 h | 500 h |
|-------|-------|

**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4, 6 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 6.

**Table 6**

| case size | number of capacitors |                    |                    |                            |                                |
|-----------|----------------------|--------------------|--------------------|----------------------------|--------------------------------|
|           | style 1<br>per box   | style 2<br>per box | style 3<br>per box | styles 4 and 6<br>per reel | style 5<br>per ammunition pack |
| 11        | 1000                 | 1000               | 1000               | 1000                       | 2000                           |
| 12        | 1000                 | 1000               | 1000               | 1000                       | 2000                           |
| 13        | 1000                 | 1000               | 1000               | 500                        | 1000                           |
| 14        | 1000                 | 1000               |                    |                            |                                |
| 15        | 500                  | 500                |                    |                            |                                |
| 16        | 500                  | 500                |                    |                            |                                |
| 17        | 200                  | 200                |                    |                            |                                |
| 18        | 200                  | 200                |                    |                            |                                |
| 19        | 200                  | 200                |                    |                            |                                |
| 20        | 200                  | 200                |                    |                            |                                |

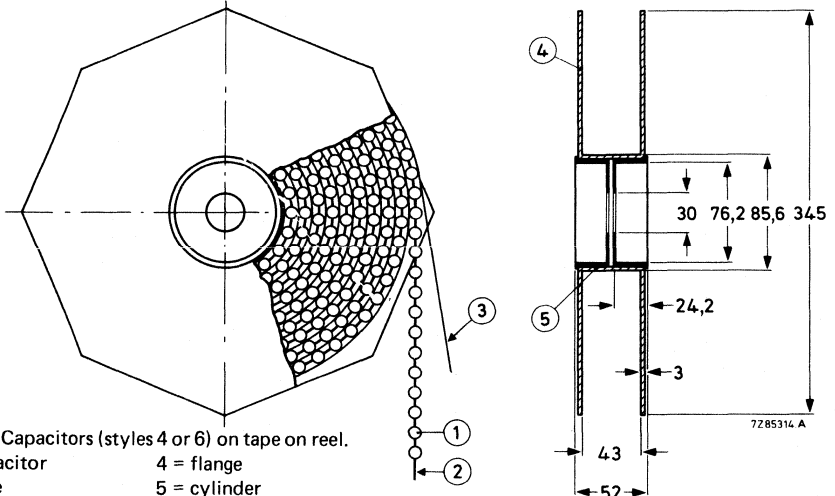


Fig. 7 Capacitors (styles 4 or 6) on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder



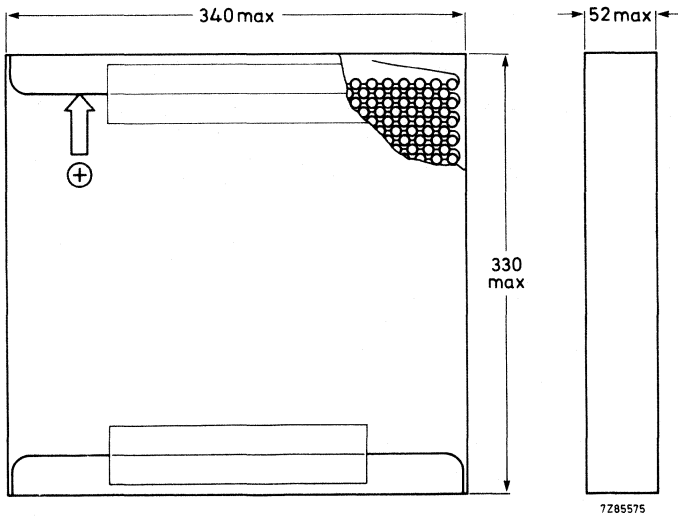


Fig. 8 Capacitors (style 5) on tape in ammunition pack.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test*, 1000 h ( $U_R = 6,3$  to 16 V) or 2000 h ( $U_R = 25$  to 100 V), 85 °C, the capacitors meet the following requirements:

$$\Delta C/C \leq \pm 20\%$$

$$\tan \delta \leq 1,5 \times \text{specified value,}$$

d.c. leakage current  $\leq$  specified value.


After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test, except for leakage current of the 100 V range:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 037 are miniature and small, general-purpose grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads and single ended
- Long life
- General and industrial applications

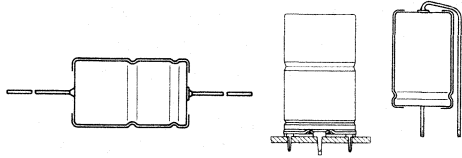

### QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range                | 1 to 220 $\mu\text{F}$                          |
| Tolerance on nominal capacitance         | -10 to +50%                                     |
| Rated voltage range, $U_R$ (R5 series)   | 160 to 385 V                                    |
| Category temperature range               | -40 to +85 $^{\circ}\text{C}$                   |
| Endurance test at 85 $^{\circ}\text{C}$  |   |
| case sizes 4 to 7                        | 2000 h  |
| case sizes 00 to 05                      | 5000 h  |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ | 500 h   |
| Basic specifications                     | IEC 384-4, type 1, long-life grade<br>DIN 41240 |
| Climatic category                        |   |
| IEC 68                                   | 40/085/56                                       |
| DIN 40040                                | GPF   |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |     |     |
|-----------------------------------|-----------|------|-----|-----|
|                                   | 160       | 250  | 350 | 385 |
| 1                                 |           |      |     | 4   |
| 2,2                               |           | 4    |     | 5   |
| 4,7                               | 4         | 5    | 6   | 7   |
| 6,8                               |           |      | 00  | 00  |
| 10                                | 5         | 00/7 | 01  | 01  |
| 15                                |           | 01   | 01  | 02  |
| 22                                | 00/7      | 01   | 02  | 03  |
| 33                                | 01        | 02   | 03  | 04  |
| 47                                | 02        | 03   | 04  | 04  |
| 68                                | 02        | 04   | 05  | 05  |
| 100                               | 03        | 05   |     |     |
| 150                               | 04        |      |     |     |
| 220                               | 05        |      |     |     |

| case size | nominal dimensions (mm) | series number |           |
|-----------|-------------------------|---------------|-----------|
| 4         | $\emptyset$ 6,5 x 18    | 041           | miniature |
| 5         | $\emptyset$ 8 x 18      |               |           |
| 6         | $\emptyset$ 10 x 18     |               |           |
| 7         | $\emptyset$ 10 x 25     |               |           |
| 00        | $\emptyset$ 10 x 30     | 042           | small     |
| 01        | $\emptyset$ 12,5 x 30   |               |           |
| 02        | $\emptyset$ 15 x 30     |               |           |
| 03        | $\emptyset$ 18 x 30     |               |           |
| 04        | $\emptyset$ 18 x 40     | 043           |           |
| 05        | $\emptyset$ 21 x 40     |               |           |

2222 041  
 2222 042  
 2222 043

**APPLICATION**

For smoothing, coupling and decoupling purposes in circuits where a high voltage is required. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor has etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitors are available in 3 styles, all with soldered-copper leads.

Style 1: axial leads; all case sizes; case sizes 4 to 7 are supplied on bandoliers.

Style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 02 to 05.

Style 3: single ended; case sizes 4 to 7 and 00 to 02.

**MECHANICAL DATA**

Dimensions in mm

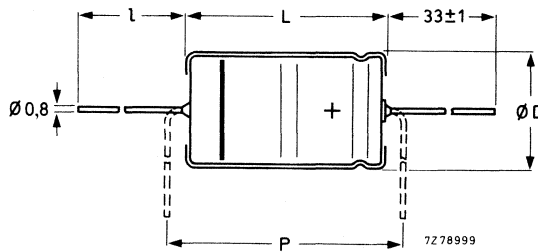


Fig. 1 Style 1; see Table 1a for dimensions D, L, l and P.


**Table 1a**

| case size | style 1 |                  |                  |                  |                  |                  | mass approx. g |
|-----------|---------|------------------|------------------|------------------|------------------|------------------|----------------|
|           | l       | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| 4         | *       | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | *       | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | *       | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | *       | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 55 ± 1  | 10,0             | 30,0             | 10,5             | 30,5             | 35,0             | 4,0            |
| 01        | 55 ± 1  | 12,5             | 30,0             | 13,0             | 30,5             | 35,0             | 6,3            |
| 02        | 55 ± 1  | 15,0             | 30,0             | 15,5             | 30,5             | 35,0             | 8,2            |
| 03        | 55 ± 1  | 18,0             | 30,0             | 18,5             | 30,5             | 35,0             | 10,9           |
| 04        | 34 ± 1  | 18,0             | 40,0             | 18,5             | 41,5             | 45,0             | 14             |
| 05        | 34 ± 1  | 21,0             | 40,0             | 21,5             | 41,5             | 45,0             | 19             |

\* Case sizes 4 to 7 are supplied on bandoliers in boxes or on reels (see PACKING).



Table 1b

| case size | style 2        |                |      |                   |            |        | mass approx. g |
|-----------|----------------|----------------|------|-------------------|------------|--------|----------------|
|           | d <sub>1</sub> | d <sub>2</sub> | D1   | D2 <sub>max</sub> | D3         | L      |                |
| 02        | 0,8            | 1 + 0,1        | 15,0 | 17,5              | 16,5 ± 0,2 | 31 ± 1 | 8,6            |
| 03        | 0,8            | 1 + 0,1        | 18,0 | 19,5              | 18,5 ± 0,2 | 31 ± 1 | 11,5           |
| 04        | 1,0            | 1,3 + 0,1      | 18,0 | 19,5              | 18,5 ± 0,2 | 42 ± 1 | 14,5           |
| 05        | 1,0            | 1,3 + 0,1      | 21,0 | 22,5              | 21,5 ± 0,2 | 42 ± 1 | 19,7           |



7295388


Fig. 2 Style 2; see Table 1b for dimensions d<sub>1</sub>, d<sub>2</sub>, D1, D2, D3 and L.

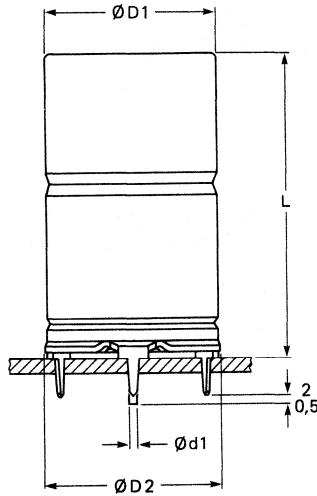

7295387

Table 1c

| case size | d   | style 3          |                  |           | mass approx. g |
|-----------|-----|------------------|------------------|-----------|----------------|
|           |     | D <sub>max</sub> | L <sub>max</sub> | P         |                |
| 4         | 0,8 | 6,9              | 21,5             | 5 -10     | 1,2            |
| 5         | 0,8 | 8,5              | 21,5             | 5 -10     | 1,6            |
| 6         | 0,8 | 10,5             | 21,5             | 7,5-12,5  | 2,3            |
| 7         | 0,8 | 10,5             | 28,0             | 7,5-12,5  | 3,1            |
| 00        | 0,8 | 10,5             | 34,0             | 7,5-12,5  | 3,8            |
| 01        | 0,8 | 13,0             | 34,0             | 7,5-12,5  | 6,1            |
| 02        | 0,8 | 15,5             | 34,0             | 10,0-15,0 | 8,0            |

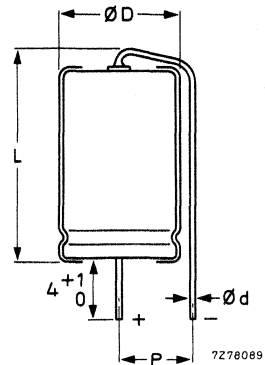

7278089

Fig. 3 Style 3 see Table 1c for dimensions d, D, L and P.

2222 041  
2222 042  
2222 043

### Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal.

### Mounting

The diameter of the holes in the printed-wiring board for styles 1 and 3 is  $1 + 0,1$  mm.

- The hole diameter for style 2 is  $1,3 + 0,1$  mm, except that for the anode pin of case sizes 02 and 03:  $1 + 0,1$  mm.

**Minimum atmospheric pressure**

8,5 kPa

### PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%. (See also the relevant paragraphs.)

| $U_R$ | nom. cap.     | max. r.m.s. ripple current at $T_{amb} = 85\text{ °C}$ | max.d.c.leakage current at $U_R$ after 1 min | max. ESR | max. tan $\delta$ | typ. impedance at 10 kHz | case size | catalogue number*<br>2222 followed by |
|-------|---------------|--|--|----------|-------------------|--------------------------|-----------|---------------------------------------|
| V     | $\mu\text{F}$ | mA   | $\mu\text{A}$                                | $\Omega$ |                   | $\Omega$                 |           |                                       |
| 160   | 4,7           | 26   | 38   | 53,2     | 0,15              | 26                       | 4         | 041 .1478                             |
|       | 10            | 41   | 68   | 25,0     | 0,15              | 12                       | 5         | 041 .1109                             |
|       | 22            | 77   | 126  | 11,4     | 0,15              | 5,5                      | 7         | 041 .1229                             |
|       | 22            | 106  | 42   | 6,8      | 0,10              | 1,3                      | 00        | 042 .1229                             |
|       | 33            | 146  | 58   | 4,5      | 0,10              | 1,0                      | 01        | 042 .1339                             |
|       | 47            | 194  | 78   | 3,2      | 0,10              | 0,66                     | 02        | 042 .1479                             |
|       | 68            | 233  | 108  | 2,2      | 0,10              | 0,48                     | 02        | 042 .1689                             |
|       | 100           | 313  | 154  | 1,5      | 0,10              | 0,37                     | 03        | 042 .1101                             |
|       | 150           | 433  | 226  | 1,0      | 0,10              | 0,21                     | 04        | 043 .1151                             |
|       | 220           | 571  | 327  | 0,7      | 0,10              | 0,18                     | 05        | 043 .1221                             |
| 250   | 2,2           | 18   | 28   | 132      | 0,18              | 35                       | 4         | 041 .3228                             |
|       | 4,7           | 29   | 55   | 61,7     | 0,18              | 18                       | 5         | 041 .3478                             |
|       | 10            | 55   | 95   | 29       | 0,18              | 7                        | 7         | 041 .3109                             |
|       | 10            | 72   | 33   | 15       | 0,10              | 4,2                      | 00        | 042 .3109                             |
|       | 15            | 100  | 44   | 10       | 0,10              | 2,8                      | 01        | 042 .3159                             |
|       | 22            | 120  | 60   | 6,8      | 0,10              | 2,2                      | 01        | 042 .3229                             |
|       | 33            | 162  | 84   | 4,5      | 0,10              | 1,4                      | 02        | 042 .3339                             |
|       | 47            | 215  | 116  | 3,2      | 0,10              | 0,75                     | 03        | 042 .3479                             |
|       | 68            | 291  | 163  | 2,2      | 0,10              | 0,4                      | 04        | 043 .3689                             |
|       | 100           | 385  | 235  | 1,5      | 0,10              | 0,28                     | 05        | 043 .3101                             |
| 350   | 4,7           | 32   | 69   | 68,1     | 0,20              | 12                       | 6         | 041 .5478                             |
|       | 6,8           | 60   | 32   | 22       | 0,10              | 5,0                      | 00        | 042 .5688                             |
|       | 10            | 81   | 42   | 15       | 0,10              | 4,2                      | 01        | 042 .5109                             |
|       | 15            | 100  | 57   | 10       | 0,10              | 2,8                      | 01        | 042 .5159                             |
|       | 22            | 133  | 79   | 6,8      | 0,10              | 2,1                      | 02        | 042 .5229                             |
|       | 33            | 162  | 114  | 4,5      | 0,10              | 0,9                      | 03        | 042 .5339                             |
|       | 47            | 242  | 158  | 3,2      | 0,10              | 0,7                      | 04        | 043 .5479                             |
|       | 68            | 317  | 224  | 2,2      | 0,10              | 0,4                      | 05        | 043 .5689                             |
| 385   | 1             | 12   | 19   | 335      | 0,20              | 40                       | 4         | 041 .8108                             |
|       | 2,2           | 23   | 42   | 152      | 0,20              | 20                       | 5         | 041 .8228                             |
|       | 4,7           | 43   | 71   | 71,3     | 0,20              | 8                        | 7         | 041 .8478                             |
|       | 6,8           | 60   | 34   | 22       | 0,10              | 5,0                      | 00        | 042 .8688                             |
|       | 10            | 81   | 45   | 15       | 0,10              | 4,2                      | 01        | 042 .8109                             |
|       | 15            | 110  | 62   | 10       | 0,10              | 2,3                      | 02        | 042 .8159                             |
|       | 22            | 147  | 86   | 6,8      | 0,10              | 2,0                      | 03        | 042 .8229                             |
|       | 33            | 203  | 124  | 4,5      | 0,10              | 0,8                      | 04        | 043 .8339                             |
|       | 47            | 242  | 173  | 3,2      | 0,10              | 0,7                      | 04        | 043 .8479                             |
|       | 68            | 317  | 246  | 2,2      | 0,10              | 0,4                      | 05        | 043 .8689                             |

\* Note is on the next page.

\* Replace dot in catalogue number by:

- 1 for style 1, case sizes 00 to 05, supplied in box;
- 2 for style 1 on bandoliers on reel (preferred for case size 4)
- 3 for style 1 on bandoliers in box (preferred for case sizes 5 to 7) } case sizes 4 to 7
- 4 for style 2, case sizes 02 to 05;
- 8 for style 3.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 2

-10 to +50%

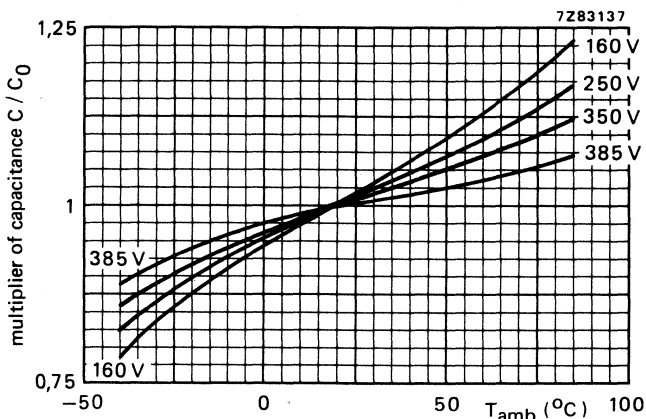


Fig. 4 Multiplier of capacitance as a function of ambient temperature; case sizes 4 to 7;  
 $C_0$  = capacitance at 20 °C, 100 Hz.

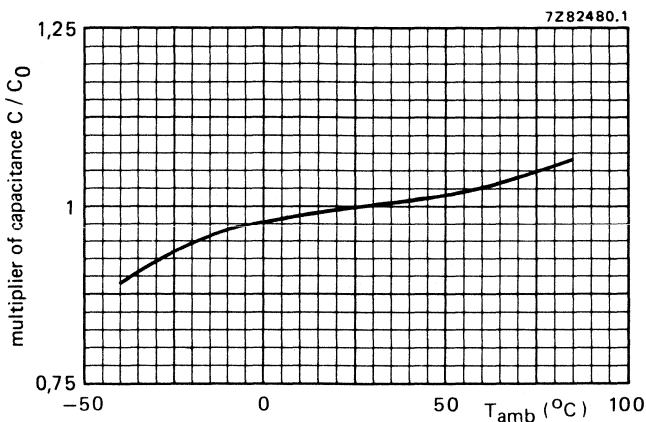


Fig. 5 Multiplier of capacitance as a function of ambient temperature; case sizes 00 to 05;  
 $C_0$  = capacitance at 25 °C, 100 Hz.



**Voltage**

Rated voltage = max. permissible voltage at core temperature<sup>▲</sup>  
 < 60 °C  
 60 to 95 °C

$1,1 \times U_R$   
 $U_R$

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

$U_R$   
 1 V  
 between  $U_R$  and  $-1$  V

Surge voltage = max. permissible voltage for short periods  
 for  $U_R = 160$  V or 250 V  
 for  $U_R = 350$  V or 385 V

$1,15 \times U_R$   
 $1,1 \times U_R$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at 85 °C for short periods

1 V

**Ripple current \*\***

Maximum permissible r.m.s. ripple current at  
 100 Hz and  $T_{amb} = 85$  °C

see Table 2

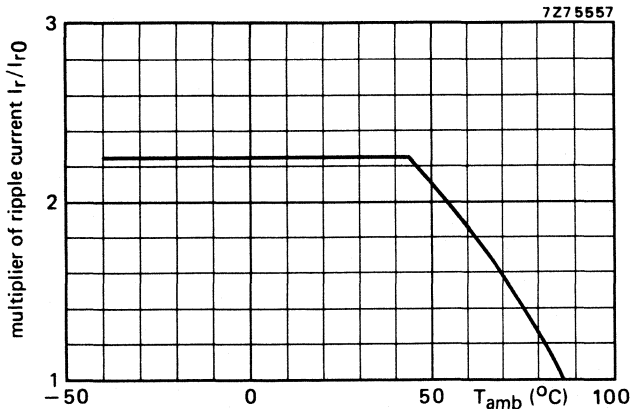


Fig. 6 Multiplier of ripple current as a function of ambient temperature;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

<sup>▲</sup> See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

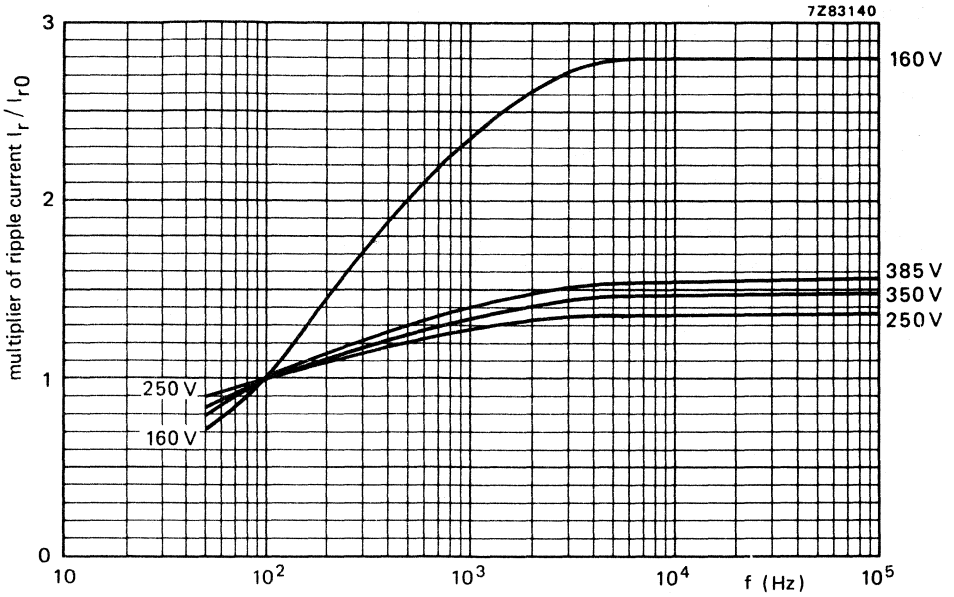


Fig. 7 Multiplier of ripple current as a function of frequency; case sizes 4 to 7;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

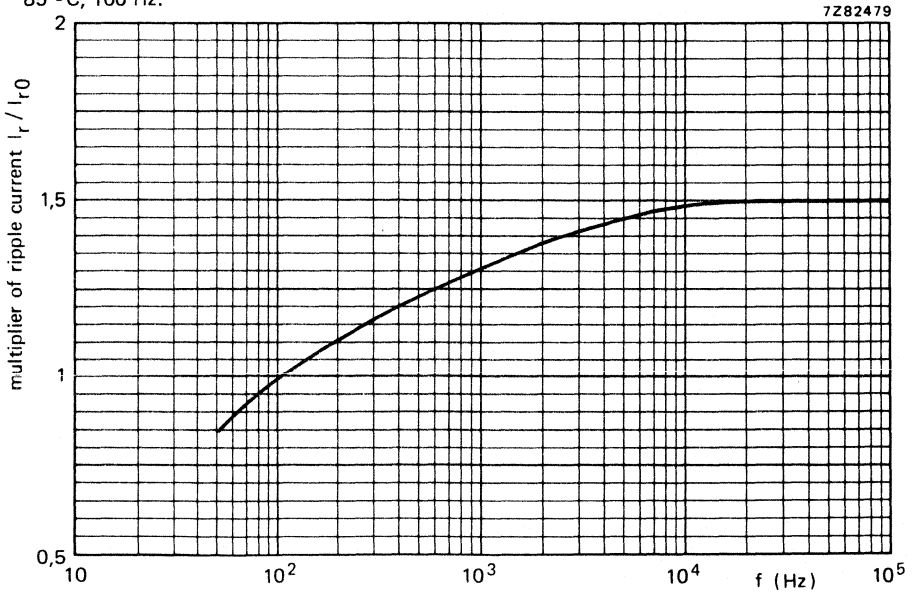


Fig. 8 Multiplier of ripple current as a function of frequency; case sizes 00 to 05;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r \max^2$$

$I_r \max$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r / I_{r0}$  = multiplying factor at a same frequency.

#### Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

#### D.C. leakage current

Maximum d.c. leakage current **1 min** after application of the rated voltage at  $T_{amb} = 20 \text{ }^\circ\text{C}$   
case sizes 4 to 7

see Table 2 (0,05 CU or  $5 \mu\text{A}$ , whichever is greater for  $CU \leq 1000 \mu\text{C}$ ;  
 $0,03 \text{ CU} + 20 \mu\text{A}$  for  $CU > 1000 \mu\text{C}$ )  
see Table 2 ( $0,009 \text{ CU} + 10 \mu\text{A}$ )

case sizes 00 to 05

Maximum d.c. leakage current **5 min** after application of the rated voltage at  $T_{amb} = 20 \text{ }^\circ\text{C}$ ; all case sizes

$0,01 \text{ CU}$  or  $1 \mu\text{A}$  (whichever is greater)  
for  $CU \leq 1000 \mu\text{C}$ ;  $0,006 \text{ CU} + 4 \mu\text{A}$   
for  $CU > 1000 \mu\text{C}$   
 $CU > 1000 \mu\text{C}$

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40 \text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

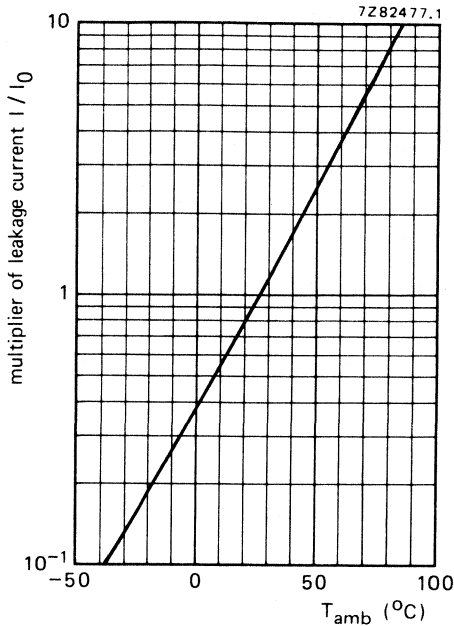


Fig. 9 Multiplier of d.c. leakage current as a function of ambient temperature;  $I_0$  = d.c. leakage current during continuous operation at 25  $^{\circ}\text{C}$  and  $U_R$ .

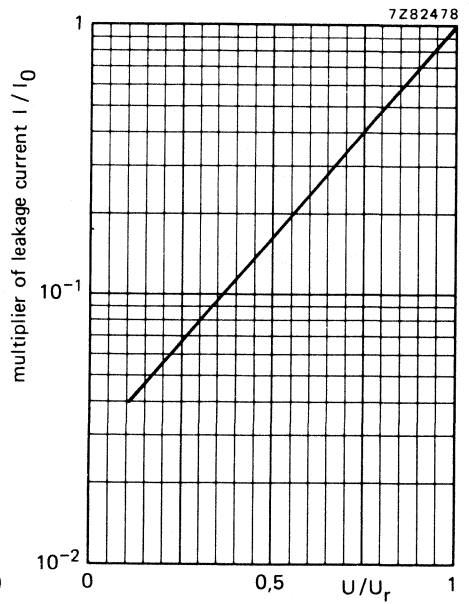


Fig. 10 Multiplier of d.c. leakage current as a function of  $U/U_R$ ;  $I_0$  = d.c. leakage current during continuous operation at 25  $^{\circ}\text{C}$  and  $U_R$ .

**Tan  $\delta$**  (dissipation factor)

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25$   $^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

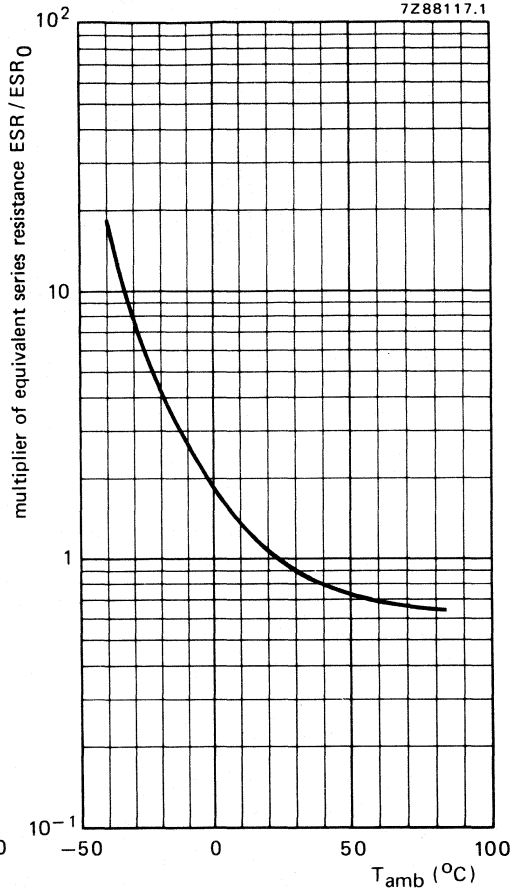
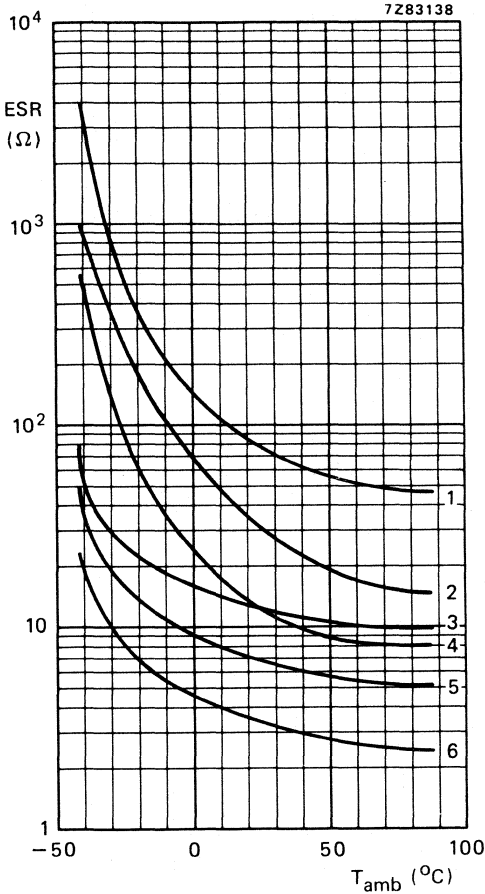


Fig. 11 Typical ESR as a function of ambient temperature at 100 Hz; case sizes 4 to 7.

- Curve 1 = case size 4, 385 V;
- curve 2 = case size 5, 385 V;
- curve 3 = case size 4, 160 V;
- curve 4 = case size 7, 385 V;
- curve 5 = case size 5, 160 V;
- curve 6 = case size 7, 160 V.

Fig. 12 Multiplier of ESR as a function of ambient temperature; case sizes 00 to 05;  $ESR_0$  = typ. ESR at 25 °C, 100 Hz.

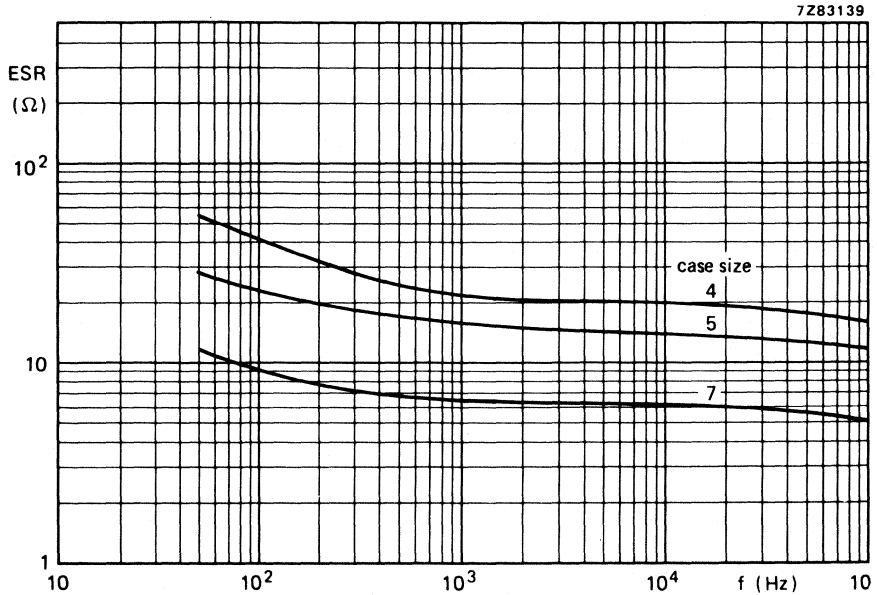


Fig. 13 Typical ESR as a function of frequency at 20 °C;  $U_R = 250$  V; case sizes 4 to 7.

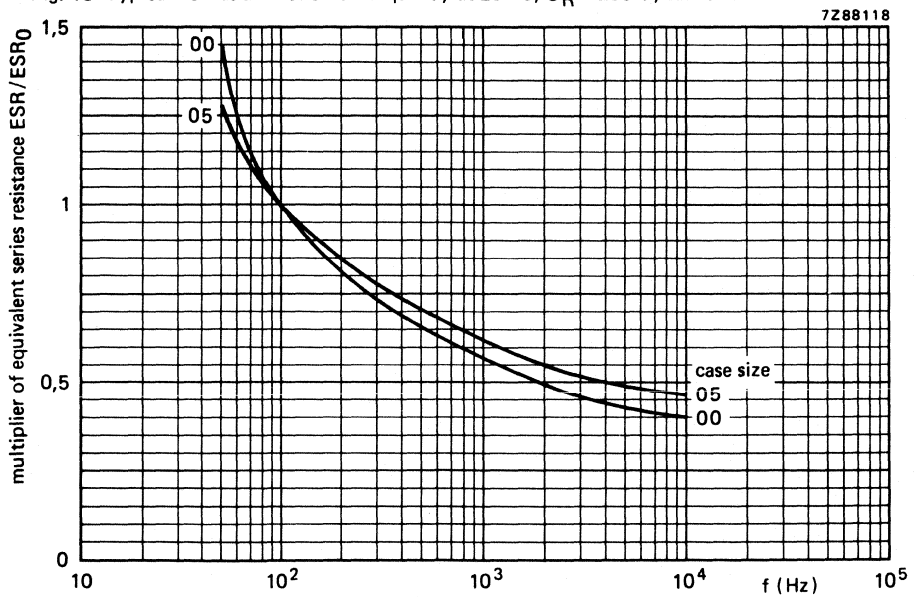


Fig. 14 Multiplier of ESR as a function of frequency; case sizes 00 to 05; ESR<sub>0</sub> = typ. ESR at 25 °C, 100 Hz.

**Impedance**

Typical impedance at 10 kHz, measured by a four-terminal circuit (Thomson circuit)

see Table 2

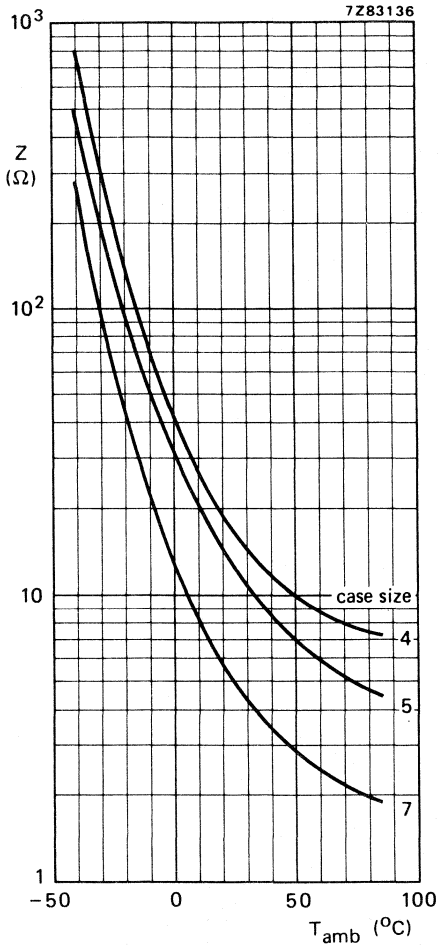


Fig. 15 Typical impedance as a function of ambient temperature at 10 kHz;  $U_R = 250$  V; case sizes 4 to 7.

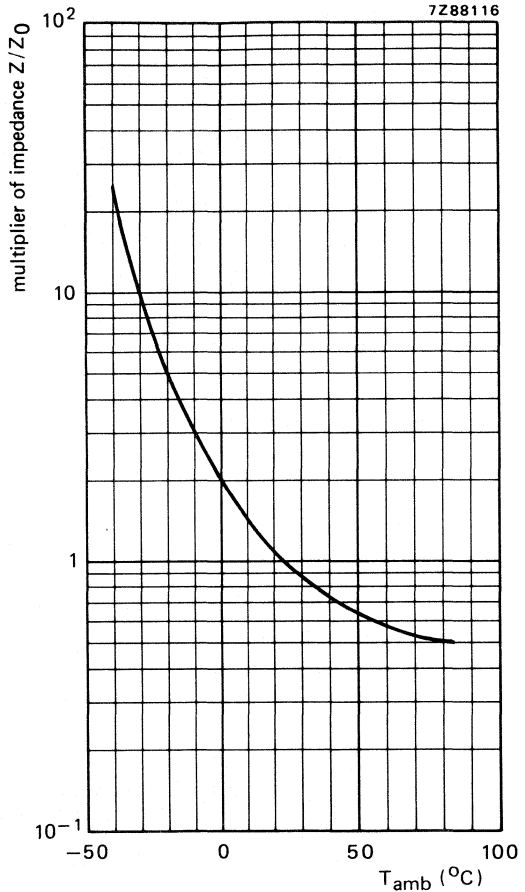


Fig. 16 Multiplier of impedance as a function of ambient temperature; case sizes 00 to 05;  $Z_0 = \text{typ. impedance at } 25^\circ\text{C, } 10 \text{ kHz}$  (see Table 2).

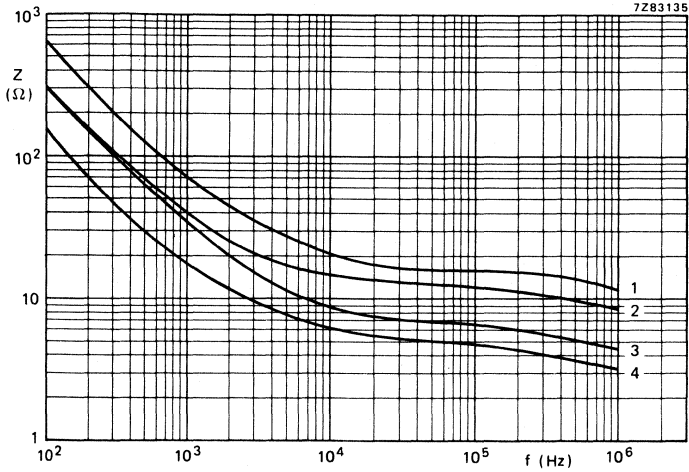


Fig. 17 Typical impedance as a function of frequency at 20 °C. Case sizes 4 to 7.

Curve 1 = case size 4, 250 V;  
 curve 2 = case size 5, 250 V;  
 curve 3 = case size 6, 350 V;  
 curve 4 = case size 7, 250 V.

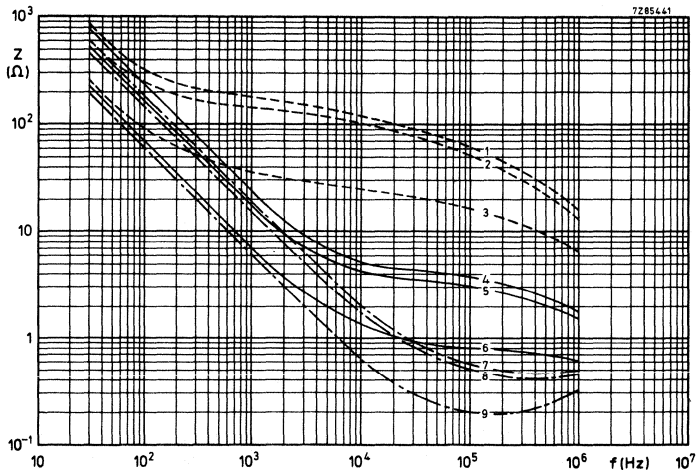


Fig. 18 Typical impedance as a function of frequency at different temperatures. Case size 00.

Curve 1 = 6,8  $\mu$ F, 350/385 V; -40 °C;  
 curve 2 = 10  $\mu$ F, 250 V; -40 °C;  
 curve 3 = 22  $\mu$ F, 160 V; -40 °C;  
 curve 4 = 6,8  $\mu$ F, 350/385 V; + 20 °C;  
 curve 5 = 10  $\mu$ F, 250 V; + 20 °C;

curve 6 = 22  $\mu$ F, 160 V; + 20 °C;  
 curve 7 = 6,8  $\mu$ F, 350/385 V; + 85 °C;  
 curve 8 = 10  $\mu$ F, 250 V; + 85 °C;  
 curve 9 = 22  $\mu$ F, 160 V; + 85 °C.



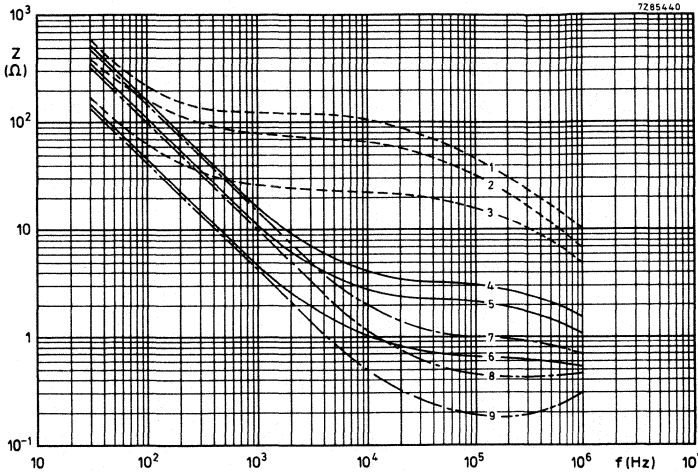


Fig. 19 Typical impedance as a function of frequency at different temperatures. **Case size 01.**

Curve 1 = 10  $\mu\text{F}$ , 350/385 V;  $-40^\circ\text{C}$ ;  
 curve 2 = 15  $\mu\text{F}$ , 250 V;  $-40^\circ\text{C}$ ;  
 curve 3 = 33  $\mu\text{F}$ , 160 V;  $-40^\circ\text{C}$ ;  
 curve 4 = 10  $\mu\text{F}$ , 350/385 V;  $+20^\circ\text{C}$ ;  
 curve 5 = 15  $\mu\text{F}$ , 250 V;  $+20^\circ\text{C}$ ;

curve 6 = 33  $\mu\text{F}$ , 160 V;  $+20^\circ\text{C}$ ;  
 curve 7 = 10  $\mu\text{F}$ , 350/385 V;  $+85^\circ\text{C}$ ;  
 curve 8 = 15  $\mu\text{F}$ , 250 V;  $+85^\circ\text{C}$ ;  
 curve 9 = 33  $\mu\text{F}$ , 160 V;  $+85^\circ\text{C}$ .

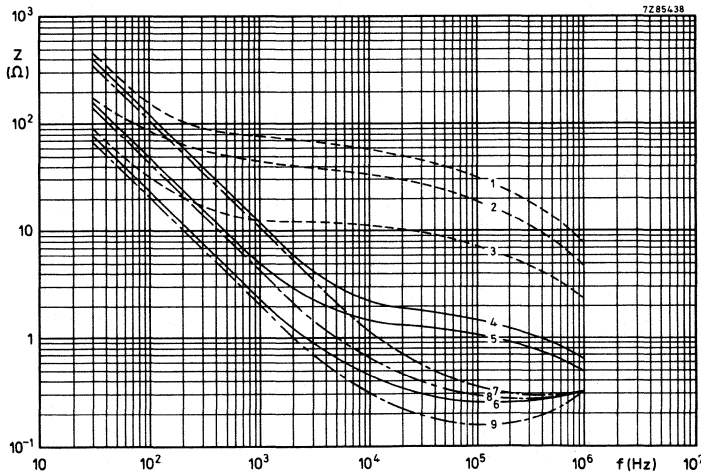


Fig. 20 Typical impedance as a function of frequency at different temperatures. **Case size 02.**

Curve 1 = 15  $\mu\text{F}$ , 385 V;  $-40^\circ\text{C}$ ;  
 curve 2 = 22  $\mu\text{F}$ , 350 V;  $-40^\circ\text{C}$ ;  
 curve 3 = 68  $\mu\text{F}$ , 160 V;  $-40^\circ\text{C}$ ;  
 curve 4 = 15  $\mu\text{F}$ , 385 V;  $+20^\circ\text{C}$ ;  
 curve 5 = 22  $\mu\text{F}$ , 350 V;  $+20^\circ\text{C}$ ;

curve 6 = 68  $\mu\text{F}$ , 160 V;  $+20^\circ\text{C}$ ;  
 curve 7 = 15  $\mu\text{F}$ , 385 V;  $+85^\circ\text{C}$ ;  
 curve 8 = 22  $\mu\text{F}$ , 350 V;  $+85^\circ\text{C}$ ;  
 curve 9 = 68  $\mu\text{F}$ , 160 V;  $+85^\circ\text{C}$ .

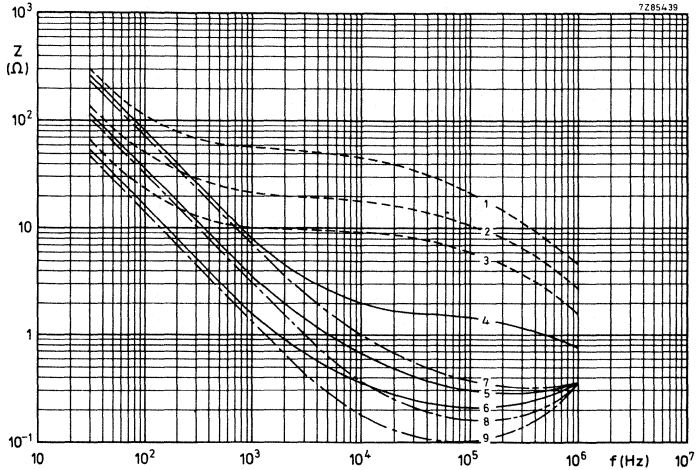


Fig. 21 Typical impedance as a function of frequency at different temperatures. **Case size 03.**

Curve 1 = 22  $\mu\text{F}$ , 385 V;  $-40^\circ\text{C}$ ;  
 curve 2 = 47  $\mu\text{F}$ , 250 V;  $-40^\circ\text{C}$ ;  
 curve 3 = 100  $\mu\text{F}$ , 160 V;  $-40^\circ\text{C}$ ;  
 curve 4 = 22  $\mu\text{F}$ , 385 V;  $+20^\circ\text{C}$ ;  
 curve 5 = 47  $\mu\text{F}$ , 250 V;  $+20^\circ\text{C}$ ;

curve 6 = 100  $\mu\text{F}$ , 160 V;  $+20^\circ\text{C}$ ;  
 curve 7 = 22  $\mu\text{F}$ , 385 V;  $+85^\circ\text{C}$ ;  
 curve 8 = 47  $\mu\text{F}$ , 250 V;  $+85^\circ\text{C}$ ;  
 curve 9 = 100  $\mu\text{F}$ , 160 V;  $+85^\circ\text{C}$ .

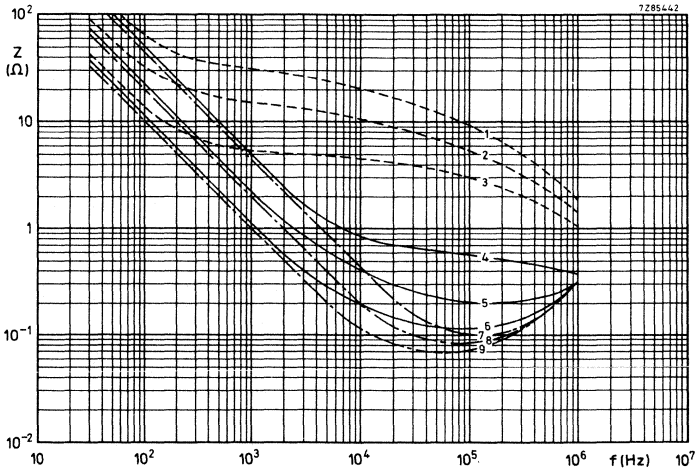


Fig. 22 Typical impedance as a function of frequency at different temperatures. **Case size 04.**

Curve 1 = 33  $\mu\text{F}$ , 385 V;  $-40^\circ\text{C}$ ;  
 curve 2 = 68  $\mu\text{F}$ , 250 V;  $-40^\circ\text{C}$ ;  
 curve 3 = 150  $\mu\text{F}$ , 160 V;  $-40^\circ\text{C}$ ;  
 curve 4 = 33  $\mu\text{F}$ , 385 V;  $+20^\circ\text{C}$ ;  
 curve 5 = 68  $\mu\text{F}$ , 250 V;  $+20^\circ\text{C}$ ;

curve 6 = 150  $\mu\text{F}$ , 160 V;  $+20^\circ\text{C}$ ;  
 curve 7 = 33  $\mu\text{F}$ , 385 V;  $+85^\circ\text{C}$ ;  
 curve 8 = 68  $\mu\text{F}$ , 250 V;  $+85^\circ\text{C}$ ;  
 curve 9 = 150  $\mu\text{F}$ , 160 V;  $+85^\circ\text{C}$ .

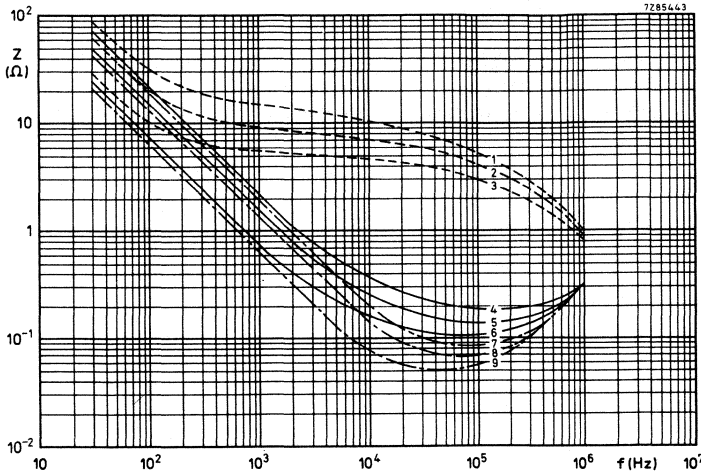


Fig. 23 Typical impedance as a function of frequency at different temperatures. **Case size 05.**

Curve 1 = 68  $\mu$ F, 350/385 V; -40 °C;  
 curve 2 = 100  $\mu$ F, 250 V; -40 °C;  
 curve 3 = 220  $\mu$ F, 160 V; -40 °C;  
 curve 4 = 68  $\mu$ F, 350/385 V; +20 °C;  
 curve 5 = 100  $\mu$ F, 250 V; +20 °C;

curve 6 = 220  $\mu$ F, 160 V; +20 °C;  
 curve 7 = 68  $\mu$ F, 350/385 V; +85 °C;  
 curve 8 = 100  $\mu$ F, 250 V; +85 °C;  
 curve 9 = 220  $\mu$ F, 160 V; +85 °C.

**Inductance (ESL)**

|                          |       |                  |
|--------------------------|-------|------------------|
| Case size 4              | 30 nH | } typical values |
| Case size 5              | 50 nH |                  |
| Case sizes 6 and 7       | 65 nH |                  |
| Case sizes 00 and 01     | 50 nH |                  |
| Case size 02             | 55 nH |                  |
| Case sizes 03, 04 and 05 | 60 nH |                  |

**OPERATIONAL DATA**

|  |                          |                          |
|--|--------------------------|--------------------------|
| Category temperature range                     | -40 to +85 °C            |                          |
| Typical life time                              | $T_{amb} = 85\text{ °C}$ | $T_{amb} = 40\text{ °C}$ |
|  | 5000 h                   | > 100 000 h              |
|  | 10 000 h                 | > 200 000 h              |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h                    |                          |

**PACKING**

All capacitors are supplied in boxes, case sizes 4 to 7 of style 1 are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 3.

2222 041  
 2222 042  
 2222 043

Table 3

| case size | number of capacitors |                 |                        |
|-----------|----------------------|-----------------|------------------------|
|           | style 1 per reel     | style 1 per box | styles 2 and 3 per box |
| 4         | 1000                 | 1000            | 1000                   |
| 5         | 500                  | 500             | 1000                   |
| 6         | 500                  | 500             | 1000                   |
| 7         | 500                  | 500             | 500                    |
| 00        |                      | 200             | 200                    |
| 01        |                      | 200             | 200                    |
| 02        |                      | 200             | 200                    |
| 03        |                      | 200             | 200                    |
| 04        |                      | 100             | 100                    |
| 05        |                      | 100             | 100                    |

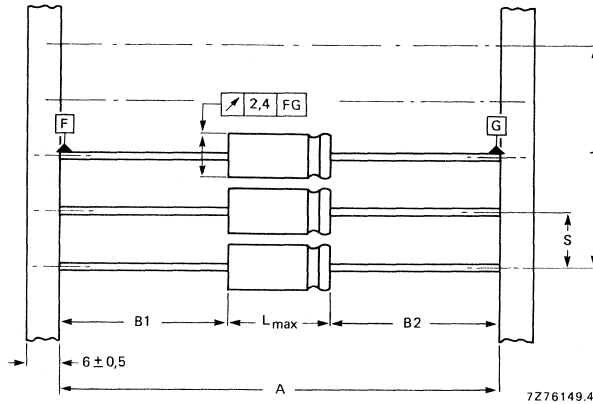


Fig. 24 Style 1 capacitors (case sizes 4 to 7) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 4 for dimensions A, S, T and L.  $|B1 - B2| = \max. 1,4 \text{ m}$

Table 4

Dimensions in mm

| case size | A        | S         | T for number (n) of capacitors |              | L <sub>max</sub> |
|-----------|----------|-----------|--------------------------------|--------------|------------------|
|           |          |           | n < 50                         | 50 < n < 100 |                  |
| 4         | 73 ± 1,6 | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 18,5             |
| 5         | 73 ± 1,6 | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 18,5             |
| 6         | 73 ± 1,6 | 15 ± 0,75 | 15 (n-1) ± 2                   | 15 (n-1) ± 4 | 18,5             |
| 7         | 73 ± 1,6 | 15 ± 0,75 | 15 (n-1) ± 2                   | 15 (n-1) ± 4 | 25,0             |

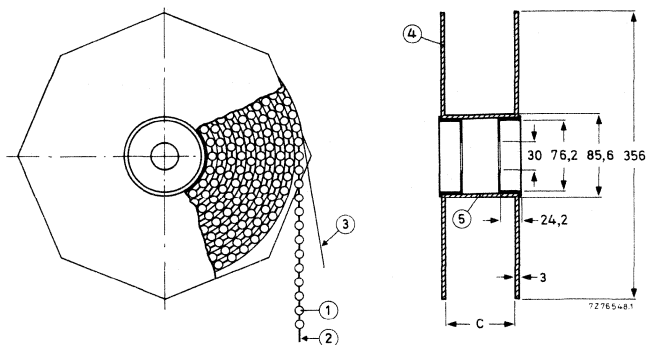


Fig. 25 Style 1 capacitors (case sizes 4 to 7) on bandoliers on reel; dimension C is 88,5 mm; the overall width of the reel is 99,5 mm.

1 = capacitor  
2 = bandolier

3 = paper  
4 = flange

5 = cylinder

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.


Note: Capacitors 2222 041 are miniature types, long-life grade.

Capacitors 2222 042 and 2222 043 are small types, long-life grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with solder tags or printed-wiring pins
- Long life
- Industrial applications



### QUICK REFERENCE DATA

|  |  |
|--|--|
| Nominal capacitance range (E6 series)              | 47 to 68 000 $\mu\text{F}$               |
| Tolerance on nominal capacitance                   | -10 to +30%                              |
| Rated voltage, $U_R$                               | 10 to 385 V                              |
| Category temperature range                         | -40 to +85 $^{\circ}\text{C}$            |
| Endurance test at 85 $^{\circ}\text{C}$ , at $U_R$ | 2000 h                                   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$           | 500 h                                    |
| Basic specification                                | IEC 384-4, long-life grade;<br>DIN 41240 |
| Dimensional specification                          | DIN 41238                                |
| Climatic category, IEC 68<br>DIN 40040             | 40/085/56<br>GPF (56 days)               |
| Approval   | CECC 30 301-033                          |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |     |     |     |     |     |     |     |
|-----------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|
|                                   | 10        | 16  | 25  | 40  | 63  | 100 | 250 | 385 |
| 47                                |           |     |     |     |     |     |     | 1   |
| 68                                |           |     |     |     |     |     |     | 2   |
| 100                               |           |     |     |     |     |     | 1   | 3   |
| 150                               |           |     |     |     |     |     | 2   | 4   |
| 220                               |           |     |     |     |     |     | 3   | 5/6 |
| 330                               |           |     |     |     |     |     | 4   | 7   |
| 470                               |           |     |     |     |     | 1   | 5/6 | 8   |
| 680                               |           |     |     |     |     | 2   | 7   |     |
| 1 000                             |           |     |     |     | 1   | 3   | 8   |     |
| 1 500                             |           |     |     | 1   | 2   | 4   |     |     |
| 2 200                             |           |     | 1   | 2   | 3   | 5/6 |     |     |
| 3 300                             |           | 1   | 2   | 3   | 4   | 7   |     |     |
| 4 700                             | 1         | 2   | 3   | 4   | 5/6 | 8   |     |     |
| 6 800                             | 2         | 3   | 4   | 5/6 | 7   | 9   |     |     |
| 10 000                            | 3         | 4   | 5/6 | 7   | 8   |     |     |     |
| 15 000                            | 4         | 5/6 | 7   | 8   | 9   |     |     |     |
| 22 000                            | 5/6       | 7   | 8   | 9   |     |     |     |     |
| 33 000                            | 7         | 8   | 9   |     |     |     |     |     |
| 47 000                            | 8         | 9   |     |     |     |     |     |     |
| 68 000                            | 9         |     |     |     |     |     |     |     |

| case size | nominal dimensions (mm)   |                                   |
|-----------|---------------------------|-----------------------------------|
|           | versions with solder tags | versions with printed-wiring pins |
| 1         | $\phi$ 25 x 35            | $\phi$ 25 x 35                    |
| 2         | $\phi$ 25 x 45            | $\phi$ 25 x 45                    |
| 3         | $\phi$ 30 x 45            | $\phi$ 30 x 45                    |
| 4         | $\phi$ 35 x 45            | $\phi$ 35 x 45                    |
| 5         | $\phi$ 35 x 55            | $\phi$ 35 x 55                    |
| 6         |                           | $\phi$ 40 x 45                    |
| 7         | $\phi$ 40 x 55            | $\phi$ 40 x 55                    |
| 8         | $\phi$ 40 x 75            | $\phi$ 40 x 75                    |
| 9         | $\phi$ 40 x 105           | $\phi$ 40 x 105                   |

**APPLICATION**

These capacitors have low ESR and ESL values and a high resistance to shock and vibration which render them suitable for application such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.

**DESCRIPTION**

The resistance to shock and vibration is achieved by a special internal construction. The capacitors are completely cold welded and charge/discharge proof. The aluminium case is fully insulated. The solder tag versions have a safety vent in the discs, the printed-wiring versions have a safety vent in the case bottom.

**MECHANICAL DATA**

Capacitors with solder tags

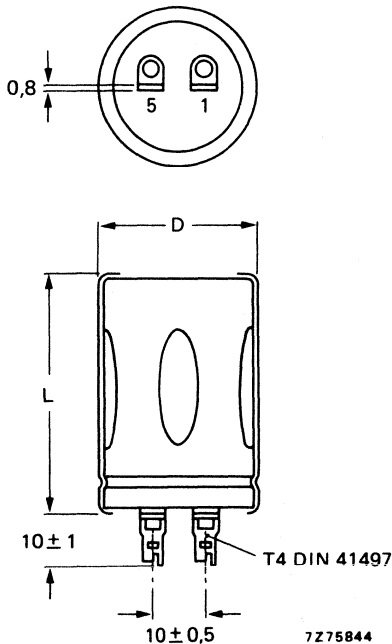


Fig. 1.

1 = positive terminal;  
5 = negative terminal.

Dimensions in mm




Fig. 2 Bolt version.

Table 1a

| case size | D  | L   | mass approx.<br>g |
|-----------|----|-----|-------------------|
| 1         | 25 | 35  | 25                |
| 2         | 25 | 45  | 30                |
| 3         | 30 | 45  | 40                |
| 4         | 35 | 45  | 55                |
| 5         | 35 | 55  | 65                |
| 7         | 40 | 55  | 85                |
| 8         | 40 | 75  | 115               |
| 9         | 40 | 105 | 160               |



Capacitors with printed-wiring pins

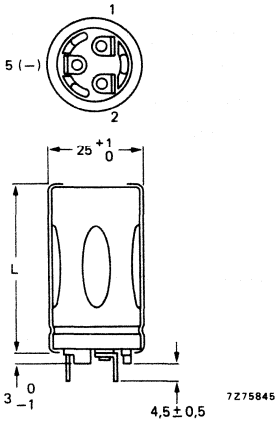


Fig. 3a.

1 = positive terminal;  
5 = negative terminal.

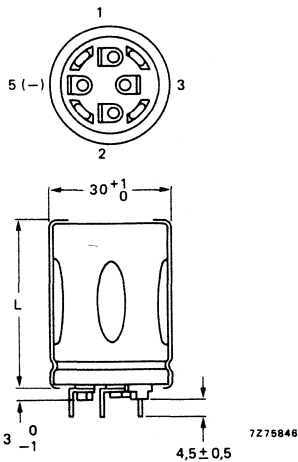


Fig. 4a.

1 = positive terminal;  
5 = negative terminal.




Fig. 3b Piercing diagram viewed from component side.

Table 1b

| case size | L  | mass approx.<br>g |
|-----------|----|-------------------|
| 1         | 35 | } + 1,3           |
| 2         | 45 |                   |
|           |    | 25                |
|           |    | 30                |




Fig. 4b Piercing diagram viewed from component side.

Table 1c

| case size | L        | mass approx.<br>g |
|-----------|----------|-------------------|
| 3         | 45 + 1,3 | 40                |

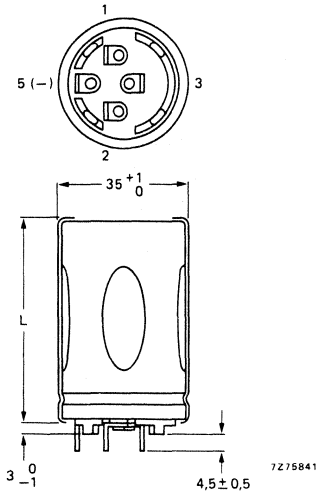


Fig. 5a.

1 = positive terminal;  
5 = negative terminal.




Fig. 5b Piercing diagram viewed from component side.

Table 1d

| case size | L  | mass approx. g |
|-----------|----|----------------|
| 4         | 45 | } + 1,3<br>55  |
| 5         | 55 |                |

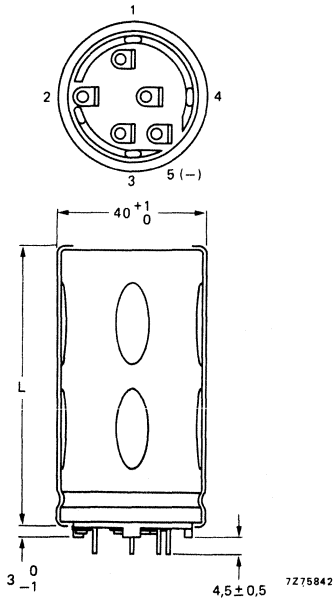


Fig. 6a.

1 = positive terminal;  
5 = negative terminal.

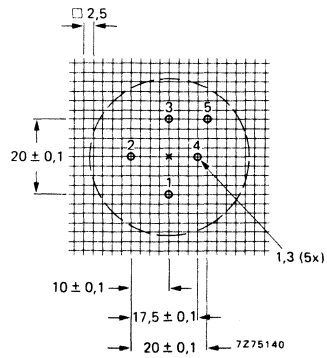


Fig. 6b Piercing diagram viewed from component side.

Table 1e

| case size | L   | mass approx. g |
|-----------|-----|----------------|
| 6         | 45  | } + 1,3<br>70  |
| 7         | 55  |                |
| 8         | 75  |                |
| 9         | 105 |                |

**Marking**

The capacitors are marked with: nominal capacitance, tolerance on capacitance, rated voltage, temperature range, IEC grade, catalogue number, date code (year, week) according to IEC 62, name of manufacturer, indication of production centre, polarity of the terminals and CECC specification BS. CECC 30 301-033. ←

The terminals are marked as shown in the dimensional figures.

**Mounting**

The capacitors may be mounted in any position with or without a mounting clamp. When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

If the case has to be at a specified potential, it should be connected to the negative terminal only.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values apply at an ambient temperature of 20 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

**Table 2** (note is at the end of the table)

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current (A) at |               | max. d.c. leakage current at U <sub>R</sub> after 1 min (mA) | typ. tan δ | max. ESR | max. impedance at 10 kHz | case size | catalogue number*<br>2222 followed by  |
|----------------|-----------|-----------------------------------|---------------|--|------------|----------|--------------------------|-----------|--|
|                | μF        | 100 Hz, 85 °C                     | 20 kHz, 70 °C |  |            |          |                          |           |  |
| 10             | 4 700     | 2,4                               | 4,6           | 0,28   | 0,19       | 74       | 50                       | 1         | 050 . 4472<br>. 4682<br>. 4103<br>. 4153<br>. 4223<br>. 4223<br>. 4333<br>. 4473<br>. 4683 |
|                | 6 800     | 3,2                               | 6,1           | 0,41   | 0,18       | 51       | 37                       | 2         |  |
|                | 10 000    | 3,8                               | 7,2           | 0,60   | 0,24       | 39       | 29                       | 3         |  |
|                | 15 000    | 4,1                               | 7,8           | 0,90   | 0,33       | 35       | 26                       | 4         |  |
|                | 22 000    | 5,0                               | 9,5           | 1,32   | 0,37       | 27       | 21                       | 5         |  |
|                | 22 000    | 4,2                               | 8,0           | 1,32   | 0,48       | 36       | 27                       | 6         |  |
|                | 33 000    | 5,0                               | 9,5           | 1,98   | 0,58       | 29       | 22                       | 7         |  |
|                | 47 000    | 6,8                               | 12,9          | 2,82   | 0,58       | 20       | 17                       | 8         |  |
|                | 68 000    | 9,2                               | 17,5          | 4,08   | 0,62       | 15       | 14                       | 9         |  |
| 16             | 3 300     | 2,4                               | 4,6           | 0,32   | 0,13       | 75       | 50                       | 1         | . 5332<br>. 5472<br>. 5682<br>. 5103<br>. 5153<br>. 5153<br>. 5223<br>. 5333<br>. 5473     |
|                | 4 700     | 3,1                               | 5,9           | 0,45   | 0,14       | 52       | 37                       | 2         |  |
|                | 6 800     | 3,7                               | 7,0           | 0,65   | 0,17       | 40       | 30                       | 3         |  |
|                | 10 000    | 4,1                               | 7,8           | 0,96   | 0,22       | 36       | 27                       | 4         |  |
|                | 15 000    | 5,0                               | 9,5           | 1,44   | 0,25       | 28       | 21                       | 5         |  |
|                | 15 000    | 4,2                               | 8,0           | 1,44   | 0,33       | 36       | 27                       | 6         |  |
|                | 22 000    | 5,0                               | 9,5           | 2,12   | 0,38       | 29       | 22                       | 7         |  |
|                | 33 000    | 6,7                               | 12,7          | 3,17   | 0,41       | 20       | 17                       | 8         |  |
|                | 47 000    | 9,1                               | 17,3          | 4,51   | 0,42       | 15       | 14                       | 9         |  |
| 25             | 2 200     | 2,3                               | 4,4           | 0,33   | 0,10       | 78       | 52                       | 1         | . 6222<br>. 6332<br>. 6472<br>. 6682<br>. 6103<br>. 6103<br>. 6153<br>. 6223<br>. 6333     |
|                | 3 300     | 3,1                               | 5,9           | 0,49   | 0,11       | 53       | 38                       | 2         |  |
|                | 4 700     | 3,7                               | 7,0           | 0,70   | 0,12       | 42       | 31                       | 3         |  |
|                | 6 800     | 4,1                               | 7,8           | 1,02   | 0,15       | 37       | 28                       | 4         |  |
|                | 10 000    | 5,0                               | 9,5           | 1,50   | 0,17       | 28       | 21                       | 5         |  |
|                | 10 000    | 4,2                               | 8,0           | 1,50   | 0,22       | 36       | 27                       | 6         |  |
|                | 15 000    | 5,0                               | 9,5           | 2,25   | 0,26       | 29       | 22                       | 7         |  |
|                | 22 000    | 6,8                               | 12,9          | 3,30   | 0,27       | 20       | 17                       | 8         |  |
|                | 33 000    | 9,2                               | 17,5          | 4,95   | 0,30       | 15       | 14                       | 9         |  |
| 40             | 1 500     | 2,0                               | 3,8           | 0,36   | 0,085      | 112      | 68                       | 1         | . 7152<br>. 7222<br>. 7332<br>. 7472<br>. 7682<br>. 7682<br>. 7103<br>. 7153<br>. 7223     |
|                | 2 200     | 2,7                               | 5,1           | 0,53   | 0,087      | 76       | 51                       | 2         |  |
|                | 3 300     | 3,3                               | 6,3           | 0,79   | 0,10       | 57       | 41                       | 3         |  |
|                | 4 700     | 3,8                               | 7,2           | 1,13   | 0,12       | 48       | 35                       | 4         |  |
|                | 6 800     | 4,7                               | 8,9           | 1,64   | 0,13       | 36       | 27                       | 5         |  |
|                | 6 800     | 4,1                               | 7,8           | 1,64   | 0,17       | 45       | 33                       | 6         |  |
|                | 10 000    | 4,9                               | 9,3           | 2,40   | 0,19       | 35       | 27                       | 7         |  |
|                | 15 000    | 6,6                               | 12,5          | 3,60   | 0,21       | 25       | 20                       | 8         |  |
|                | 22 000    | 9,0                               | 17,1          | 5,28   | 0,22       | 18       | 16                       | 9         |  |

Table 2 (continued)

| $U_R$ | nom<br>cap.   | max. r.m.s.<br>ripple current<br>(A) at |                  | max. d.c.<br>leakage<br>current at | typ.<br>$\tan \delta$ | max.<br>ESR | max.<br>impedance<br>at 10 kHz | case<br>size | catalogue<br>number*<br>2222<br>followed<br>by |
|-------|---------------|---|------------------|------------------------------------|-----------------------|-------------|--------------------------------|--------------|--|
| V     | $\mu\text{F}$ | 100 Hz,<br>85 °C                        | 20 kHz,<br>70 °C | $U_R$ after<br>1 min (mA)          |                       | m $\Omega$  | m $\Omega$                     |              |  |
| 63    | 1 000         | 1,8                                     | 3,4              | 0,38                               | 0,064                 | 122         | 74                             | 1            | 050 . 8102                                     |
|       | 1 500         | 2,5                                     | 4,7              | 0,57                               | 0,065                 | 83          | 54                             | 2            | . 8152   |
|       | 2 200         | 3,1                                     | 5,9              | 0,83                               | 0,076                 | 57          | 41                             | 3            | . 8222   |
|       | 3 300         | 3,6                                     | 6,8              | 1,25                               | 0,094                 | 48          | 35                             | 4            | . 8332   |
|       | 4 700         | 4,4                                     | 8,3              | 1,78                               | 0,10                  | 36          | 27                             | 5            | . 8472   |
|       | 4 700         | 3,8                                     | 7,2              | 1,78                               | 0,13                  | 45          | 33                             | 6            | . 8472   |
|       | 6 800         | 4,7                                     | 8,9              | 2,57                               | 0,14                  | 35          | 27                             | 7            | . 8682   |
|       | 10 000        | 6,2                                     | 11,8             | 3,78                               | 0,15                  | 25          | 20                             | 8            | . 8103   |
|       | 15 000        | 8,5                                     | 16,1             | 5,67                               | 0,16                  | 18          | 16                             | 9            | . 8153   |
| 100   | 470           | 1,2                                     | 2,3              | 0,28                               | 0,086                 | 429         | 300                            | 1            | . 9471   |
|       | 680           | 1,7                                     | 3,2              | 0,41                               | 0,087                 | 297         | 210                            | 2            | . 9681   |
|       | 1 000         | 2,2                                     | 4,2              | 0,60                               | 0,092                 | 208         | 150                            | 3            | . 9102   |
|       | 1 500         | 2,6                                     | 4,9              | 0,90                               | 0,10                  | 152         | 120                            | 4            | . 9152   |
|       | 2 200         | 3,2                                     | 6,1              | 1,32                               | 0,11                  | 109         | 90                             | 5            | . 9222   |
|       | 2 200         | 3,0                                     | 5,7              | 1,32                               | 0,12                  | 124         | 110                            | 6            | . 9222   |
|       | 3 300         | 3,6                                     | 6,8              | 1,98                               | 0,14                  | 91          | 75                             | 7            | . 9332   |
|       | 4 700         | 5,0                                     | 9,5              | 2,82                               | 0,13                  | 63          | 55                             | 8            | . 9472   |
|       | 6 800         | 6,9                                     | 13,1             | 4,08                               | 0,14                  | 44          | 40                             | 9            | . 9682   |
| 250   | 100           | 0,6                                     | 1,15             | 0,15                               | 0,085                 | 1800        | 1300                           | 1            | 052 . 3101                                     |
|       | 150           | 0,8                                     | 1,5              | 0,23                               | 0,08                  | 1100        | 850                            | 2            | . 3151   |
|       | 220           | 1,0                                     | 1,9              | 0,33                               | 0,08                  | 750         | 550                            | 3            | . 3221   |
|       | 330           | 1,4                                     | 2,65             | 0,49                               | 0,08                  | 500         | 400                            | 4            | . 3331   |
|       | 470           | 1,8                                     | 3,4              | 0,70                               | 0,08                  | 360         | 290                            | 5            | . 3471   |
|       | 470           | 1,8                                     | 3,4              | 0,70                               | 0,095                 | 420         | 350                            | 6            | . 3471   |
|       | 680           | 2,3                                     | 4,4              | 1,02                               | 0,08                  | 250         | 190                            | 7            | . 3681   |
|       | 1 000         | 3,0                                     | 5,7              | 1,50                               | 0,08                  | 170         | 140                            | 8            | . 3102   |
| 385   | 47            | 0,4                                     | 0,75             | 0,11                               | 0,065                 | 2800        | 2200                           | 1            | . 8479   |
|       | 68            | 0,6                                     | 1,15             | 0,16                               | 0,055                 | 1700        | 1350                           | 2            | . 8689   |
|       | 100           | 0,8                                     | 1,5              | 0,23                               | 0,055                 | 1100        | 850                            | 3            | . 8101   |
|       | 150           | 1,0                                     | 1,9              | 0,34                               | 0,055                 | 725         | 525                            | 4            | . 8151   |
|       | 220           | 1,3                                     | 2,45             | 0,50                               | 0,055                 | 500         | 350                            | 5            | . 8221   |
|       | 220           | 1,3                                     | 2,45             | 0,50                               | 0,065                 | 600         | 420                            | 6            | . 8221   |
|       | 330           | 1,7                                     | 3,2              | 0,75                               | 0,055                 | 340         | 230                            | 7            | . 8331   |
|       | 470           | 2,8                                     | 5,3              | 1,06                               | 0,055                 | 240         | 160                            | 8            | . 8471   |

\* To complete the catalogue number, replace dot (8th digit) by:

1 = solder tag version;

4 = printed-wiring version, case size 6 only;

5 = printed-wiring version, except case size 6;

6 = solder tag, bolt version.

**Capacitance**

Nominal capacitance values at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +30%

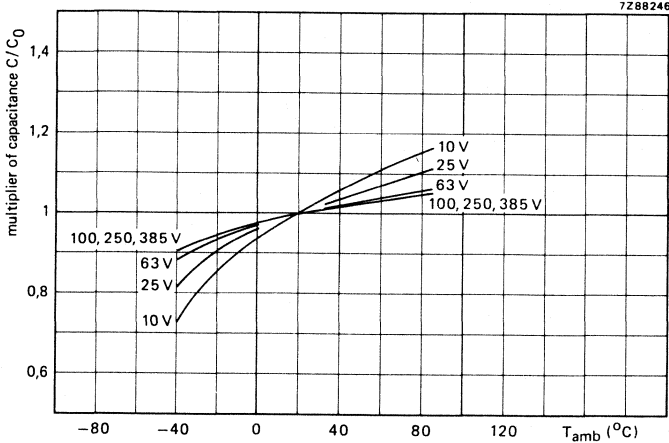


Fig. 7 Multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at 25 °C, 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following conditions are met:

- (a) max. positive voltage on anode (d.c. + peak a.c.)
- (b) max. positive voltage on cathode (reverse voltage)

Surge voltage = max. permissible voltage at the maximum category temperature for short periods

- 10 to 100 V versions
- 250 V version
- 385 V version

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

| core temperature ▲    |                   |
|-----------------------|-------------------|
| < 60 °C               | 60 to 95 °C       |
| $1,1 \times U_R$      | $U_R$             |
| $\leq 1,1 \times U_R$ | $\leq U_R$        |
| 2 V                   |                   |
| $1,25 \times U_R$     | $1,15 \times U_R$ |
| $1,15 \times U_R$     | $1,15 \times U_R$ |
| $1,1 \times U_R$      | $1,1 \times U_R$  |
| 2 V                   |                   |

▲ See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

**Ripple current\***

Maximum permissible r.m.s. ripple current

at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$ at 20 kHz and  $T_{amb} = 70\text{ }^{\circ}\text{C}$ 

at 100 Hz and other temperatures

at other frequencies and  $T_{amb} = 85\text{ }^{\circ}\text{C}$ 

see Table 2

see Table 2

see Table 3

see Table 4

**Table 3**

| ambient temperature<br>$^{\circ}\text{C}$ | multiplier of<br>max. ripple<br>current |
|---|---|
| 85  | 1,00                                    |
| 80  | 1,22                                    |
| 75  | 1,41                                    |
| 70  | 1,58                                    |
| 65  | 1,73                                    |
| 60  | 1,87                                    |
| 55  | 2,00                                    |
| 50  | 2,12                                    |
| 45  | 2,24                                    |
| $\leq 40$                                 | 2,35                                    |

**Table 4**

| frequency<br>Hz | multiplier of<br>max. ripple<br>current, $\sqrt{r}$ |
|-----------------|---|
| 50              | 0,83  |
| 100             | 1,00  |
| 200             | 1,10  |
| 400             | 1,15  |
| 1000            | 1,19  |
| $\geq 2000$     | 1,20  |

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature

$I_n$  = ripple current at a certain frequency

$\sqrt{r_n}$  = multiplying factor at same frequency (Table 4).

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application  
of the rated voltage at  $T_{amb} = 20\text{ }^{\circ}\text{C}$  see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

Maximum d.c. leakage current 15 min after application  
of the rated voltage  
at  $T_{amb} = 20\text{ }^{\circ}\text{C}$  0,125 x value stated in Table 2  
at  $T_{amb} = 85\text{ }^{\circ}\text{C}$  0,625 x value stated in Table 2

If owing to prolonged storage and/or storage at an excessive temperature the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$  (dissipation factor)**

Tan  $\delta$  at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ,  
measured by means of a four-terminal  
circuit (Thomson circuit) see Table 2

**Equivalent series inductance (ESL)**

Case sizes 1 and 2 max. 25 nH

Case sizes 3, 4 and 5 max. 30 nH

Case sizes 6, 7 and 8 max. 35 nH

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$  see Table 2



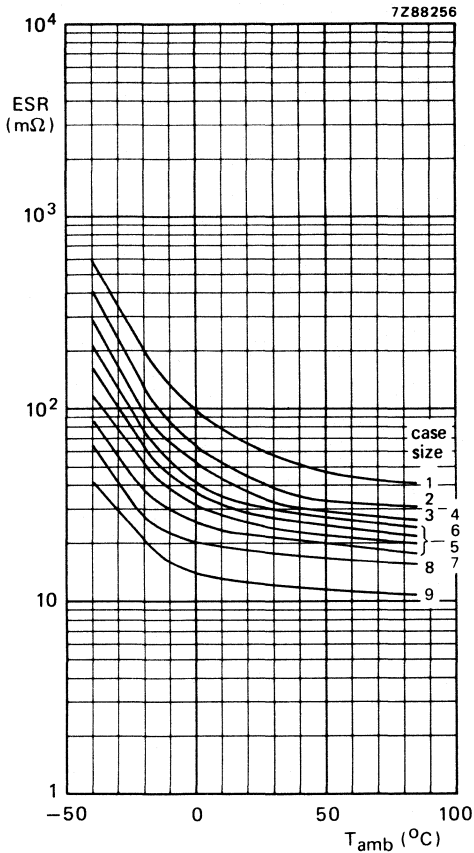


Fig. 8 Typical ESR as a function of temperature at 100 Hz,  $U_R = 10$  V.

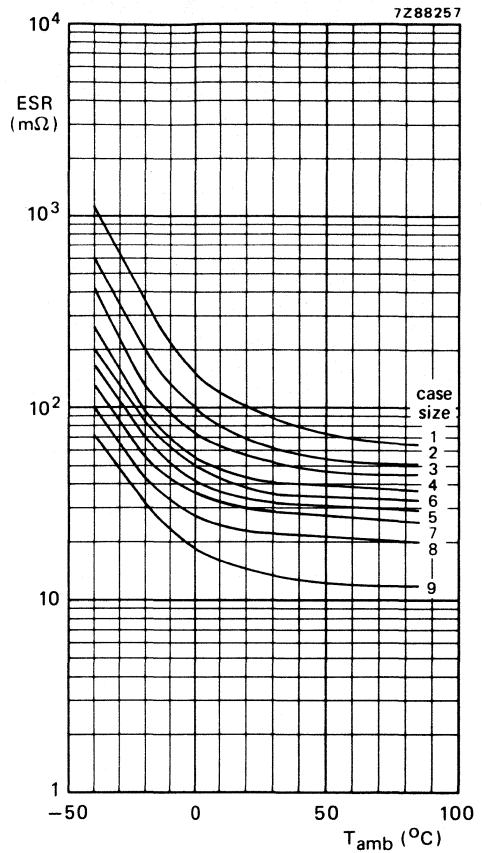


Fig. 9 Typical ESR as a function of temperature at 100 Hz,  $U_R = 63$  V.

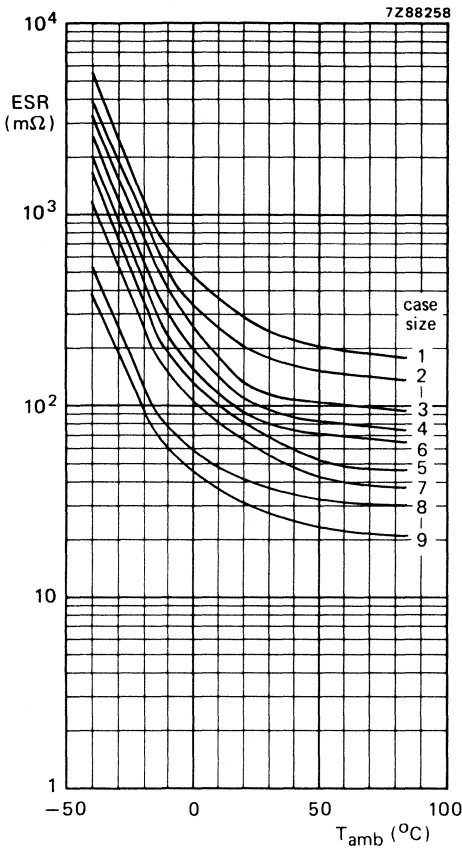


Fig. 10 Typical ESR as a function of temperature at 100 Hz,  $U_R = 100$  V.

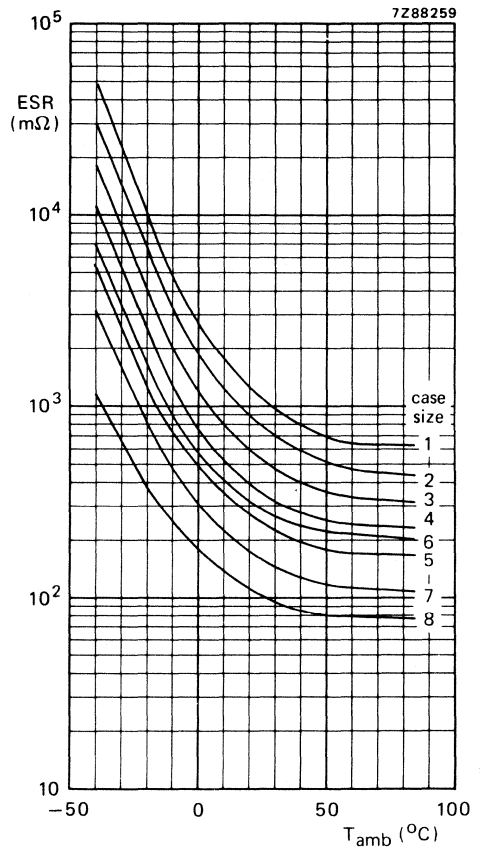


Fig. 11 Typical ESR as a function of temperature at 100 Hz,  $U_R = 250$  V.

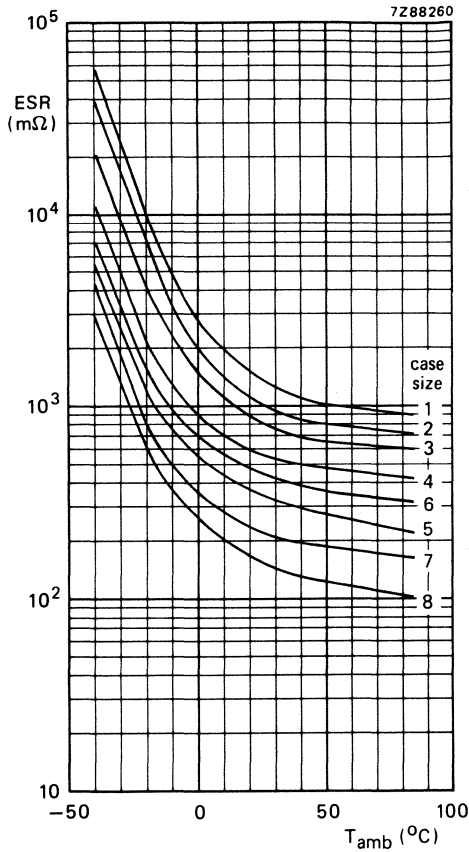


Fig. 12 Typical ESR as a function of temperature at 100 Hz,  $U_R = 385$  V.

**Impedance**

Maximum impedance at 10 kHz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

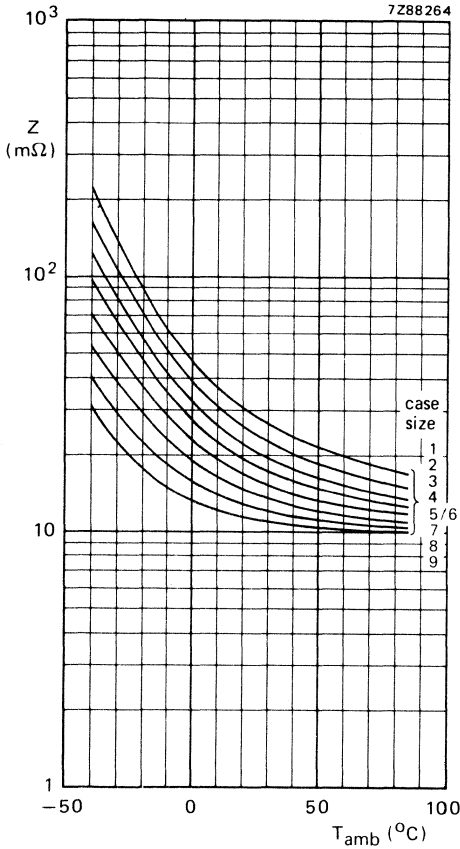


Fig. 13 Typical impedance as a function of temperature at 10 kHz,  $U_R = 10\text{ V}$ .

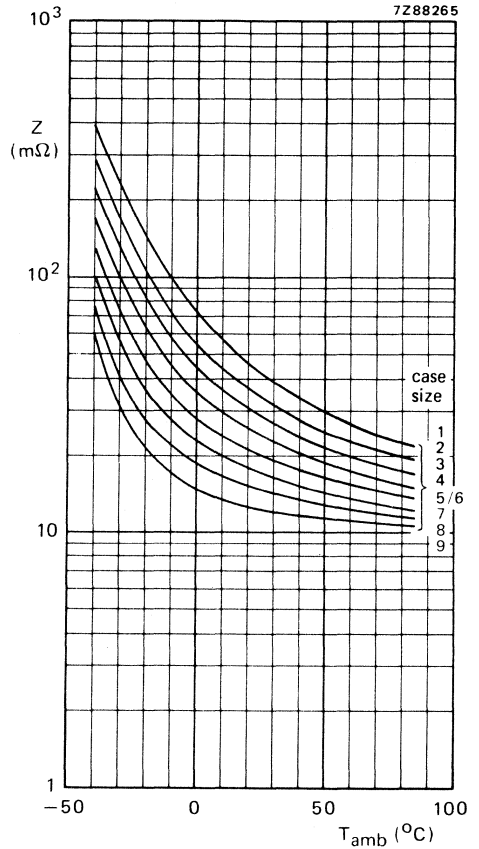


Fig. 14 Typical impedance as a function of temperature at 10 kHz,  $U_R = 63\text{ V}$ .

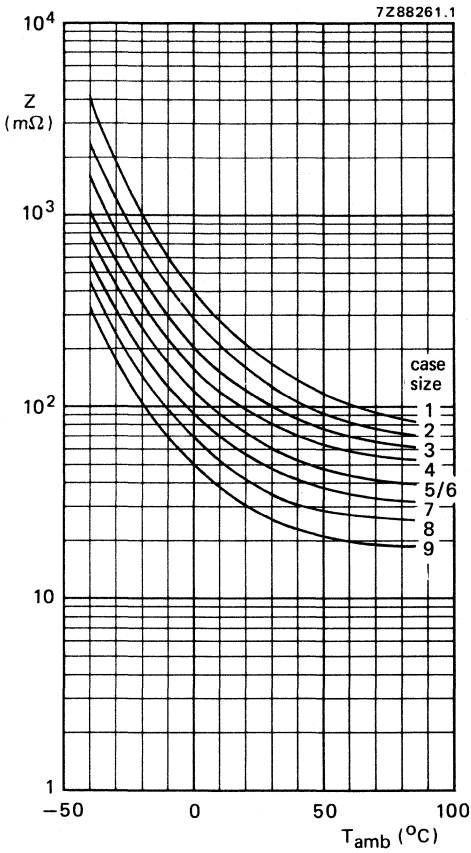


Fig. 15 Typical impedance as a function of temperature at 10 kHz,  $U_R = 100$  V.

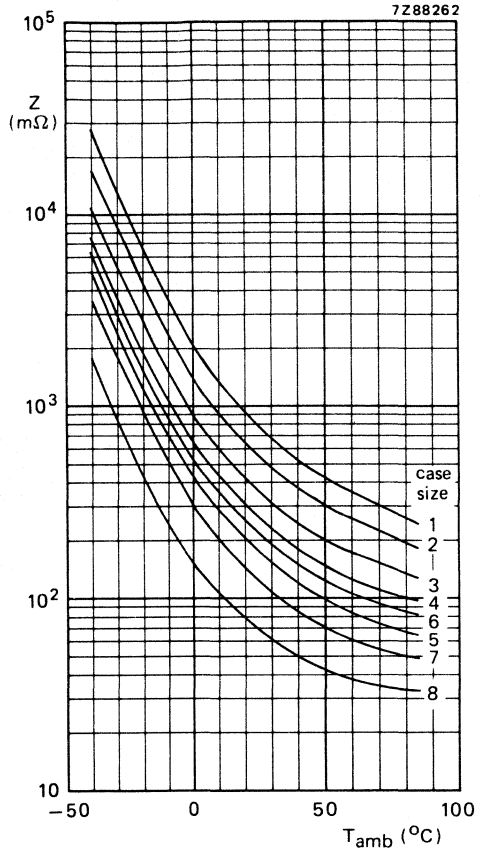


Fig. 16 Typical impedance as a function of temperature at 10 kHz,  $U_R = 250$  V.

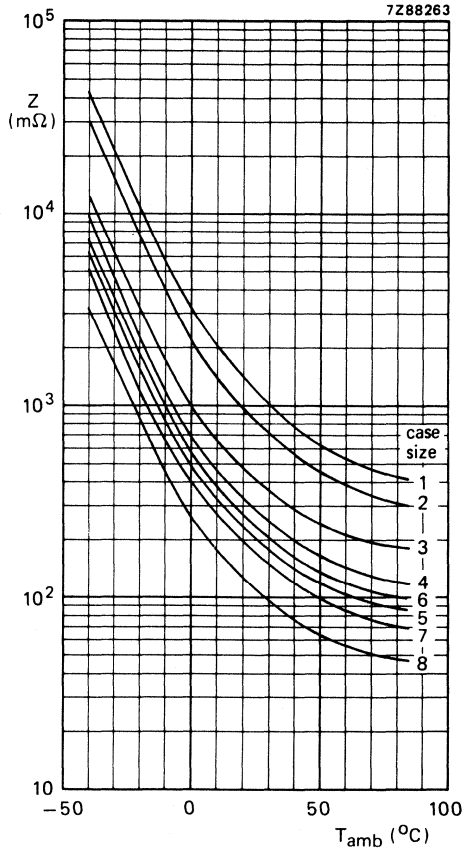


Fig. 17 Typical impedance as a function of temperature at 10 kHz,  $U_R = 385$  V.

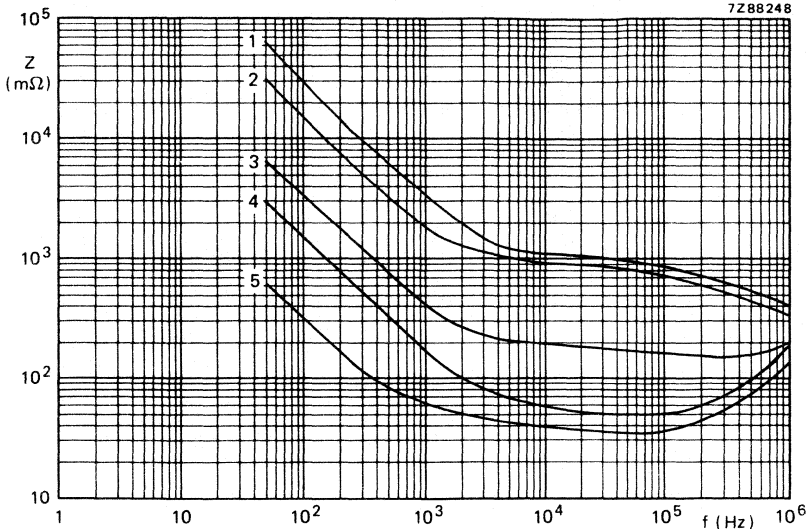


Fig. 18 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 1**:  
 curve 1 =  $47\text{ }\mu\text{F}$ , 385 V; curve 4 =  $1000\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $100\text{ }\mu\text{F}$ , 250 V; curve 5 =  $4700\text{ }\mu\text{F}$ , 10 V;  
 curve 3 =  $470\text{ }\mu\text{F}$ , 100 V;

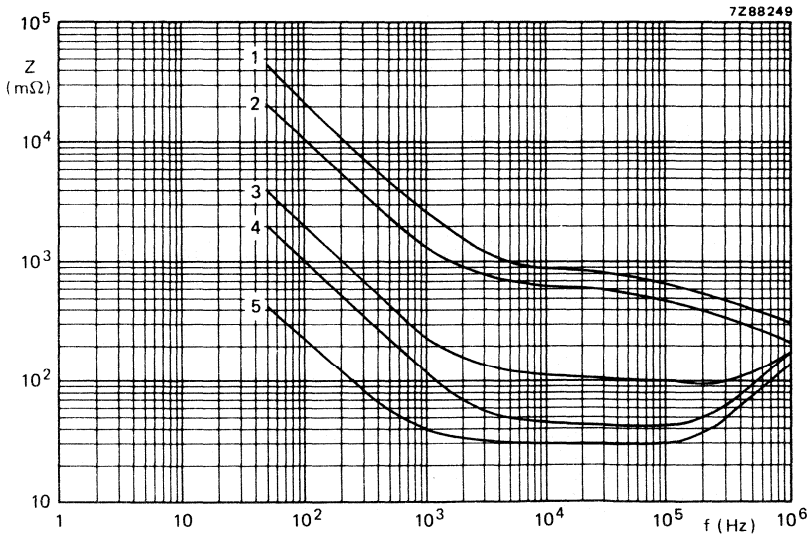


Fig. 19 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 2**:  
 curve 1 =  $68\text{ }\mu\text{F}$ , 385 V; curve 4 =  $1500\text{ }\mu\text{F}$ , 63 V;  
 curve 2 =  $150\text{ }\mu\text{F}$ , 250 V; curve 5 =  $6800\text{ }\mu\text{F}$ , 10 V;  
 curve 3 =  $680\text{ }\mu\text{F}$ , 100 V;

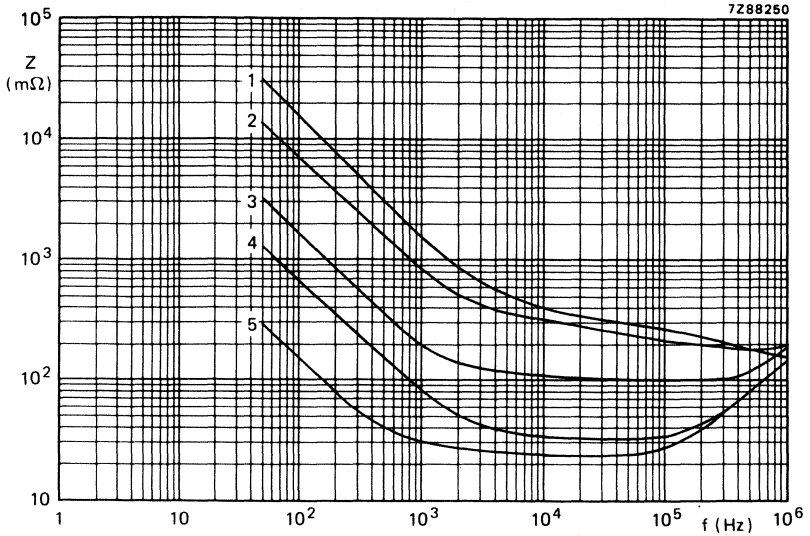


Fig. 20 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 3**:  
curve 1 = 100  $\mu\text{F}$ , 385 V; curve 4 = 2200  $\mu\text{F}$ , 63 V;  
curve 2 = 220  $\mu\text{F}$ , 250 V; curve 5 = 10 000  $\mu\text{F}$ , 10 V;  
curve 3 = 1000  $\mu\text{F}$ , 100 V;

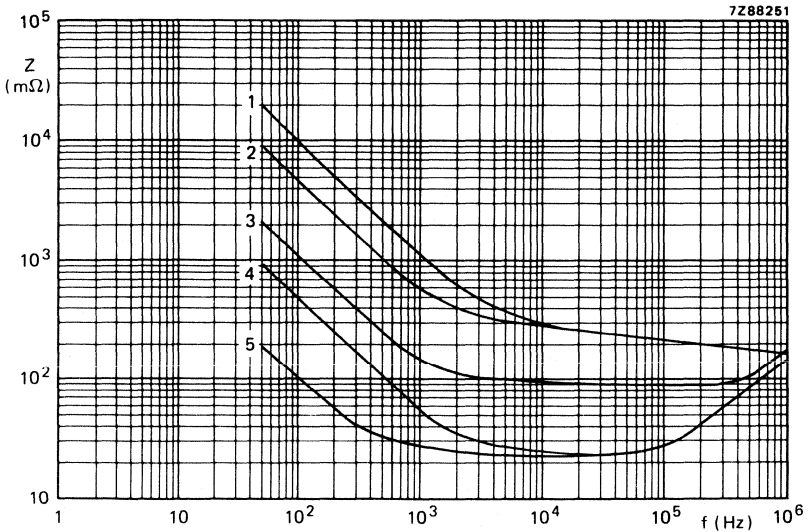


Fig. 21 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 4**:  
curve 1 = 150  $\mu\text{F}$ , 385 V; curve 4 = 3300  $\mu\text{F}$ , 63 V;  
curve 2 = 330  $\mu\text{F}$ , 250 V; curve 5 = 15 000  $\mu\text{F}$ , 10 V;  
curve 3 = 1500  $\mu\text{F}$ , 100 V;



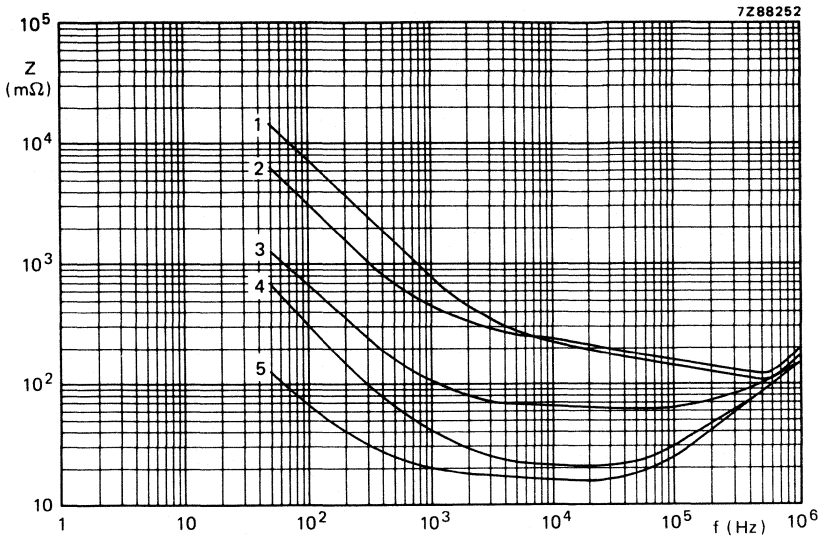


Fig. 22 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 5:  
 curve 1 = 220  $\mu\text{F}$ , 385 V; curve 2 = 470  $\mu\text{F}$ , 250 V;  
 curve 3 = 2200  $\mu\text{F}$ , 100 V; curve 4 = 4700  $\mu\text{F}$ , 63 V;  
 curve 5 = 22 000  $\mu\text{F}$ , 10 V.

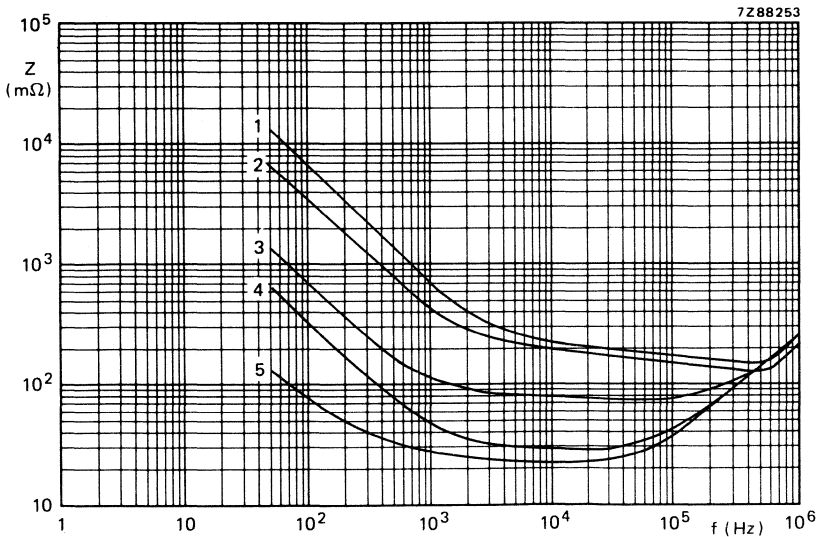


Fig. 23 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 6:  
 curve 1 = 220  $\mu\text{F}$ , 385 V; curve 2 = 470  $\mu\text{F}$ , 250 V;  
 curve 3 = 2200  $\mu\text{F}$ , 100 V; curve 4 = 4700  $\mu\text{F}$ , 63 V;  
 curve 5 = 22 000  $\mu\text{F}$ , 10 V.

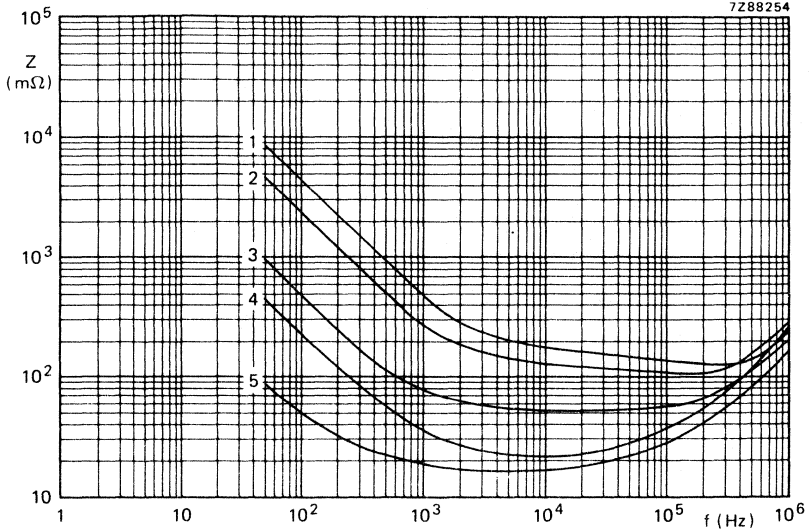


Fig. 24 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 7:  
curve 1 =  $330\text{ }\mu\text{F}$ , 385 V; curve 4 =  $6800\text{ }\mu\text{F}$ , 63 V;  
curve 2 =  $680\text{ }\mu\text{F}$ , 250 V; curve 5 =  $33\text{ }000\text{ }\mu\text{F}$ , 10 V.  
curve 3 =  $3300\text{ }\mu\text{F}$ , 100 V;

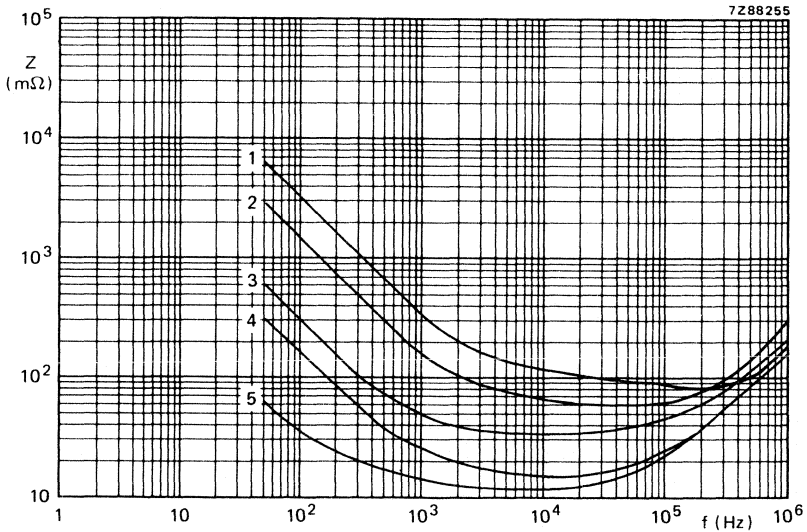


Fig. 25 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 8:  
curve 1 =  $470\text{ }\mu\text{F}$ , 385 V; curve 4 =  $10\text{ }000\text{ }\mu\text{F}$ , 63 V;  
curve 2 =  $1000\text{ }\mu\text{F}$ , 250 V; curve 5 =  $47\text{ }000\text{ }\mu\text{F}$ , 10 V.  
curve 3 =  $4700\text{ }\mu\text{F}$ , 100 V;

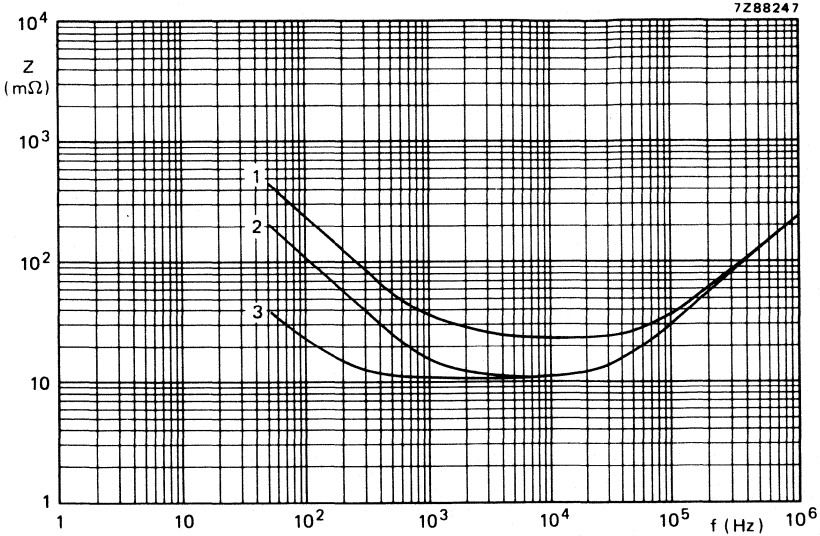


Fig. 26 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 9:  
curve 1 = 6800  $\mu\text{F}$ , 100 V;  
curve 2 = 15 000  $\mu\text{F}$ , 63 V;  
curve 3 = 68 000  $\mu\text{F}$ , 10 V.

**OPERATIONAL DATA**

|  |                          |
|--|--------------------------|
| <b>Category temperature range</b>  | -40 to + 85 °C           |
| <b>Life expectancy</b>   |                          |
| Typical life time  |                          |
| at T <sub>amb</sub> = 85 °C  | > 5000 h                 |
| at T <sub>amb</sub> = 40 °C  | > 100 000 h              |
| Shelf life at 0 V and T <sub>amb</sub> = 85 °C   | 500 h                    |
| <b>Failure rate</b>  |                          |
| Failure rate, catastrophic, at rated voltage,<br>T <sub>amb</sub> = 40 °C and confidence level 60% | < 0,5 × 10 <sup>-7</sup> |

**PACKING**

The capacitors are packed in boxes containing 100 pieces.

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors.

For the 385 V version the d.c. leakage current and tan δ measurements of the reverse voltage test (sub clause 9. 16 IEC 384-4) should be carried out after 250 h, U<sub>R</sub> in forward polarity.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 050 and 2222 052 are large types, long-life grade.

**MOUNTING ACCESSORIES**

Dimensions in mm

**Clamps**

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slid over the capacitor and then fixed to it with a nut and bolt. The clamps have two mounting lugs. Four types are available, one for each case diameter of the capacitor range. They are delivered without nuts or bolts.

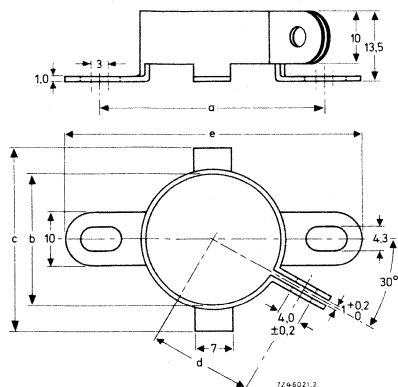


Fig. 27 Clamp for case sizes 1, 2, 3, 7, 8 and 9.

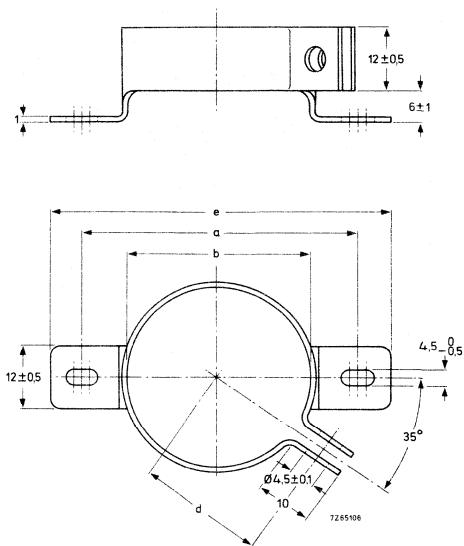


Fig. 28 Clamp for case sizes 4 and 5.

| case size | dimensions (mm) |    |    |      |    | catalogue number                          |
|-----------|-----------------|----|----|------|----|---|
|           | a               | b  | c  | d    | e  |   |
| 1, 2      | 41,5 ± 0,2      | 25 | 35 | 18,5 | 56 | 4322 043 03301<br>03311<br>04272<br>03331 |
| 3         | 46,5 ± 0,2      | 30 | 40 | 21   | 61 |   |
| 4, 5      | 51,5 ± 0,2      | 35 | —  | 23,5 | 63 |   |
| 7, 8, 9   | 56,5 ± 0,2      | 40 | 50 | 26   | 71 |   |

→ **Bolt/nut**

When mounting by means of the bolt, which is an integral part of the case, standard metal M8 nuts and washers can be used; the maximum permissible torque is 7Nm.

If insulated mounting is required synthetic nuts and rubber washers are available; for these nuts the maximum permissible torque is 4Nm.

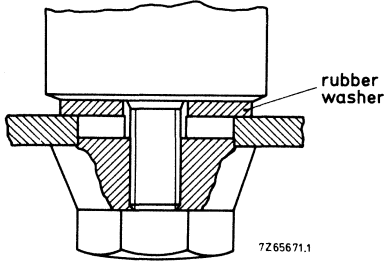


Fig. 29.




Fig. 30 Synthetic cap nut M8, threaded depth min 11,5 mm. Catalogue number 4322 043 05561.




Fig. 31 Rubber washer (thickness 2 mm).

| D<br>mm | catalogue number |
|---------|------------------|
| 24      | 4322 043 05611   |
| 29      | 4322 043 05601   |
| 34      | 4322 043 05591   |
| 39      | 4322 043 05581   |

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Very high CU-product per unit volume
- Large type with printed-wiring pins
- Long life
- Industrial applications



### QUICK REFERENCE DATA

|  |                             |
|--|-----------------------------|
| Nominal capacitance range (E6 series)  | 68 to 150 000 $\mu$ F       |
| Tolerance on nominal capacitance       | $\pm 20\%$                  |
| Rated voltage range, $U_R$             | 10 to 385 V                 |
| Category temperature range             |                             |
| for $U_R \leq 63$ V                    | $-55$ to $+85$ $^{\circ}$ C |
| for $U_R > 63$ V                       | $-40$ to $+85$ $^{\circ}$ C |
| Endurance test at $85$ $^{\circ}$ C    | 2000 h                      |
| Shelf life at $0$ V, $85$ $^{\circ}$ C | 500 h                       |
| Basic specification                    | IEC 384-4, long-life grade  |
| Climatic category, IEC 68              | 40/085/56                   |

Selection chart for  $C_{nom}$ - $U_R$  and relevant case sizes

| $C_{nom}$<br>$\mu$ F | $U_R$ (V) |     |     |     |     |     |     |     |
|----------------------|-----------|-----|-----|-----|-----|-----|-----|-----|
|                      | 10        | 16  | 25  | 40  | 63  | 100 | 200 | 385 |
| 68                   |           |     |     |     |     |     |     | 1   |
| 100                  |           |     |     |     |     |     |     | 2   |
| 150                  |           |     |     |     |     |     | 1   | 3   |
| 220                  |           |     |     |     |     |     | 2   | 4   |
| 330                  |           |     |     |     |     |     | 3   | 5/6 |
| 470                  |           |     |     |     |     |     | 4   | 7   |
| 680                  |           |     |     |     |     | 1   | 5/6 | 8   |
| 1 000                |           |     |     |     |     | 2   | 7   | 9   |
| 1 500                |           |     |     |     |     | 3   | 8   |     |
| 2 200                |           |     |     |     | 1   | 4   | 9   |     |
| 3 300                |           |     |     | 1   | 2   | 5/6 |     |     |
| 4 700                |           |     | 1   | 2   | 3   | 7   |     |     |
| 6 800                |           | 1   | 2   | 3   | 4   | 8   |     |     |
| 10 000               | 1         | 2   | 3   | 4   | 5/6 | 9   |     |     |
| 15 000               | 2         | 3   | 4   | 5/6 | 8   |     |     |     |
| 22 000               | 3         | 4   | 5/6 | 7   | 9   |     |     |     |
| 33 000               | 4         | 5/6 | 7   | 8   |     |     |     |     |
| 47 000               | 5/6       | 7   | 8   | 9   |     |     |     |     |
| 68 000               | 7         | 8   | 9   |     |     |     |     |     |
| 100 000              | 8         | 9   |     |     |     |     |     |     |
| 150 000              | 9         |     |     |     |     |     |     |     |

| case size | nominal dimensions mm       |
|-----------|-----------------------------|
| 1         | $\varnothing 25 \times 35$  |
| 2         | $\varnothing 25 \times 45$  |
| 3         | $\varnothing 30 \times 45$  |
| 4         | $\varnothing 35 \times 45$  |
| 5         | $\varnothing 35 \times 55$  |
| 6         | $\varnothing 40 \times 45$  |
| 7         | $\varnothing 40 \times 55$  |
| 8         | $\varnothing 40 \times 75$  |
| 9         | $\varnothing 40 \times 105$ |

**APPLICATION**

These capacitors have low ESR and ESL values and feature extremely small dimensions which render them suitable for applications such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control equipment.

**DESCRIPTION**

The capacitors have deeply etched anode foil electrodes, which achieves extremely small dimensions for a given CU-product. They are completely cold welded and charge/discharge proof. The aluminium case is fully insulated. A safety vent is located in the case bottom.

**MECHANICAL DATA**

Capacitors with printed-wiring pins

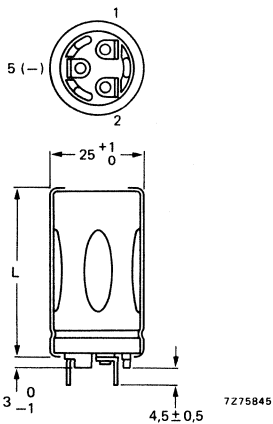


Fig. 1a.

1 = positive terminal;  
5 = negative terminal.




Fig. 1b Piercing diagram viewed from component side.

Table 1a

| case size | L  | mass approx. g |
|-----------|----|----------------|
| 1         | 35 | } + 1,3<br>25  |
| 2         | 45 |                |



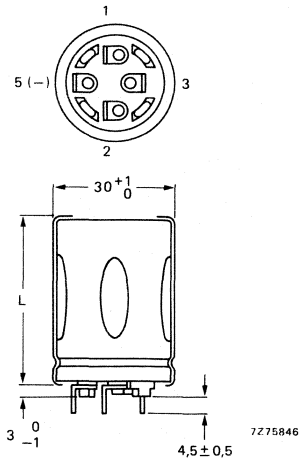


Fig. 2a.

1 = positive terminal;  
5 = negative terminal.




Fig. 2b Piercing diagram viewed from component side.

Table 1b

| case size | L        | mass approx. g |
|-----------|----------|----------------|
| 3         | 45 + 1,3 | 40             |

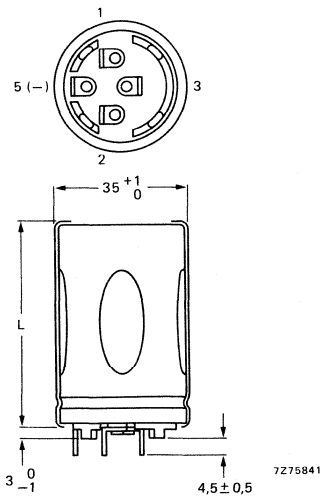


Fig. 3a.

1 = positive terminal;  
5 = negative terminal.




Fig. 3b Piercing diagram viewed from component side.

Table 1c

| case size | L          | mass approx. g |
|-----------|------------|----------------|
| 4         | 45 } + 1,3 | 55             |
| 5         |            | 55             |

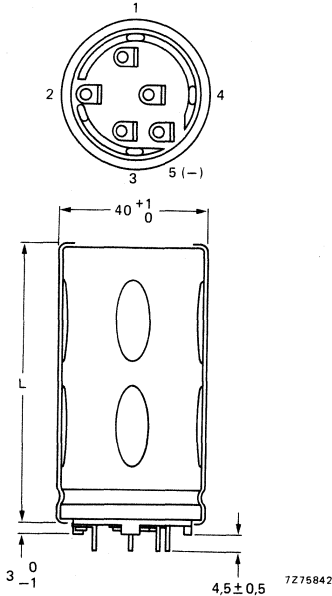


Fig. 4a.

1 = positive terminal;  
5 = negative terminal.

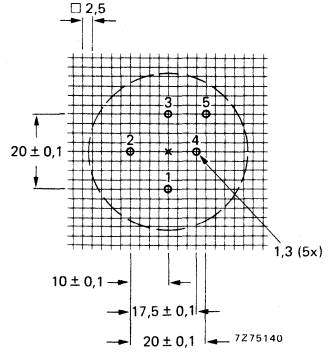


Fig. 4b Piercing diagram viewed from component side.

Table 1d

| case size | L   | mass approx. g |
|-----------|-----|----------------|
| 6         | 45  | 70             |
| 7         | 55  | 85             |
| 8         | 75  | 115            |
| 9         | 105 | 160            |

} + 1,3

**Marking**

The capacitors are marked with: nominal capacitance, tolerance on capacitance, rated voltage, temperature range, data code (year and week) according to IEC62, name of manufacturer, indication of production centre, polarity of the terminals and rill to identify the negative terminal.

**Mounting**

The capacitors may be mounted in any position with or without a mounting clamp. Where a number of capacitors are connected to form a capacitor bank, the proximity to one another must not be less than 15 mm, when no derating of ripple current and/or temperature is applied. If the case has to be at a specified potential, it should be connected to the negative terminal only.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Unless otherwise specified all electrical values apply at an ambient temperature of 20 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 2 (see also corresponding paragraphs)

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at |              | max.d.c.leakage current at U <sub>R</sub> after 1 min | max. ESR | max. impedance at 10 kHz | case size | catalogue number 2222 followed by   |
|----------------|-----------|-------------------------------|--------------|---|----------|--------------------------|-----------|---|
|                | μF        | 100 Hz/85 °C                  | 20 kHz/70 °C |   |          |                          |           |   |
| 10             | 10 000    | 3,1                           | 5,9          | 0,60  | 51       | 40                       | 1         | 051 54103<br>54153<br>54223<br>54333<br>54473<br>44473<br>54683<br>54104<br>54154 |
|                | 15 000    | 4,1                           | 7,8          | 0,90  | 37       | 30                       | 2         |   |
|                | 22 000    | 5,0                           | 9,5          | 1,32  | 30       | 25                       | 3         |   |
|                | 33 000    | 5,5                           | 10,4         | 1,98  | 28       | 24                       | 4         |   |
|                | 47 000    | 6,8                           | 12,9         | 2,82  | 23       | 20                       | 5         |   |
|                | 47 000    | 5,8                           | 10,4         | 2,82  | 29       | 22                       | 6         |   |
|                | 68 000    | 7,1                           | 13,5         | 4,08  | 24       | 20                       | 7         |   |
|                | 100 000   | 9,2                           | 17,4         | 6,00  | 19       | 16                       | 8         |   |
|                | 150 000   | 12,0                          | 22,7         | 9,00  | 16       | 14                       | 9         |   |
| 16             | 6 800     | 3,1                           | 5,9          | 0,65  | 53       | 42                       | 1         | 55682<br>55103<br>55153<br>55223<br>55333<br>45333<br>55473<br>55683<br>55104     |
|                | 10 000    | 4,0                           | 7,6          | 0,96  | 39       | 34                       | 2         |   |
|                | 15 000    | 5,0                           | 9,5          | 1,44  | 31       | 27                       | 3         |   |
|                | 22 000    | 5,5                           | 10,4         | 2,12  | 29       | 26                       | 4         |   |
|                | 33 000    | 6,7                           | 12,7         | 3,17  | 23       | 21                       | 5         |   |
|                | 33 000    | 5,7                           | 10,8         | 3,17  | 30       | 24                       | 6         |   |
|                | 47 000    | 7,0                           | 13,3         | 4,52  | 24       | 20                       | 7         |   |
|                | 68 000    | 9,2                           | 17,4         | 6,53  | 19       | 16                       | 8         |   |
|                | 100 000   | 12,0                          | 22,7         | 9,60  | 16       | 14                       | 9         |   |
| 25             | 4 700     | 2,9                           | 5,5          | 0,71  | 60       | 42                       | 1         | 56472<br>56682<br>56103<br>56153<br>56223<br>46223<br>56333<br>56473<br>56683     |
|                | 6 800     | 3,9                           | 7,4          | 1,02  | 42       | 34                       | 2         |   |
|                | 10 000    | 4,8                           | 9,1          | 1,50  | 34       | 27                       | 3         |   |
|                | 15 000    | 5,3                           | 10,0         | 2,25  | 30       | 26                       | 4         |   |
|                | 22 000    | 6,5                           | 12,3         | 3,30  | 24       | 21                       | 5         |   |
|                | 22 000    | 5,7                           | 10,8         | 3,30  | 31       | 24                       | 6         |   |
|                | 33 000    | 7,0                           | 13,3         | 4,95  | 25       | 20                       | 7         |   |
|                | 47 000    | 9,2                           | 17,4         | 7,05  | 19       | 16                       | 8         |   |
|                | 68 000    | 12,0                          | 22,7         | 10,20   | 16       | 14                       | 9         |   |
| 40             | 3 300     | 2,9                           | 5,5          | 0,80  | 87       | 63                       | 1         | 57332<br>57472<br>57682<br>57103<br>57153<br>47153<br>57223<br>57333<br>57473     |
|                | 4 700     | 3,8                           | 7,2          | 1,13  | 62       | 47                       | 2         |   |
|                | 6 800     | 4,7                           | 8,9          | 1,64  | 49       | 38                       | 3         |   |
|                | 10 000    | 5,2                           | 9,8          | 2,40  | 48       | 37                       | 4         |   |
|                | 15 000    | 6,3                           | 11,9         | 3,60  | 37       | 28                       | 5         |   |
|                | 15 000    | 5,6                           | 10,6         | 3,60  | 50       | 35                       | 6         |   |
|                | 22 000    | 5,8                           | 11,0         | 5,28  | 39       | 28                       | 7         |   |
|                | 33 000    | 7,8                           | 14,8         | 7,92  | 28       | 21                       | 8         |   |
|                | 47 000    | 10,4                          | 19,7         | 11,28   | 22       | 17                       | 9         |   |

Table 2 (continued)

| $U_R$  | nom. cap. | max. r.m.s. ripple current at |              | max. d.c. leakage current at $U_R$ after 1 min | max. ESR | max. impedance at 10 kHz | case size | catalogue number 2222 followed by |
|--------|-----------|-------------------------------|--------------|--|----------|--------------------------|-----------|-----------------------------------|
|        | V         | $\mu\text{F}$                 | 100 Hz/85 °C |  |          |                          |           |                                   |
| 63     | 2 200     | 2,5                           | 4,7          | 0,84   | 83       | 62                       | 1         | 051 58222                         |
|        | 3 300     | 3,3                           | 6,2          | 1,25   | 58       | 42                       | 2         | 58332                             |
|        | 4 700     | 4,1                           | 7,8          | 1,78   | 49       | 38                       | 3         | 58472                             |
|        | 6 800     | 4,5                           | 8,5          | 2,57   | 48       | 37                       | 4         | 58682                             |
|        | 10 000    | 5,4                           | 10,2         | 3,78   | 37       | 28                       | 5         | 58103                             |
|        | 10 000    | 4,6                           | 8,7          | 3,78   | 52       | 37                       | 6         | 48103                             |
|        | 15 000    | 7,5                           | 14,2         | 5,67   | 29       | 24                       | 8         | 58153                             |
|        | 22 000    | 10                            | 19           | 8,32   | 22       | 19                       | 9         | 58223                             |
|        | 100       | 680                           | 1,74         | 3,30   | 0,41     | 190                      | 130       | 1                                 |
| 1 000  |           | 2,34                          | 4,44         | 0,60   | 130      | 90                       | 2         | 59102                             |
| 1 500  |           | 2,95                          | 5,59         | 0,90   | 95       | 67                       | 3         | 59152                             |
| 2 200  |           | 3,69                          | 7,00         | 1,32   | 71       | 53                       | 4         | 59222                             |
| 3 300  |           | 4,37                          | 8,29         | 1,98   | 55       | 41                       | 5         | 59332                             |
| 3 300  |           | 4,16                          | 7,89         | 1,98   | 64       | 48                       | 6         | 49332                             |
| 4 700  |           | 5,21                          | 9,88         | 2,82   | 49       | 38                       | 7         | 59472                             |
| 6 800  |           | 6,97                          | 13,22        | 4,08   | 35       | 28                       | 8         | 59682                             |
| 10 000 |           | 9,50                          | 18,00        | 6,00   | 26       | 21                       | 9         | 59103                             |
| 200    |           | 150                           | 0,70         | 1,33   | 0,18     | 1000                     | 770       | 1                                 |
|        | 220       | 0,94                          | 1,78         | 0,26   | 680      | 525                      | 2         | 52221                             |
|        | 330       | 1,27                          | 2,41         | 0,40   | 460      | 360                      | 3         | 52331                             |
|        | 470       | 1,66                          | 3,15         | 0,57   | 320      | 250                      | 4         | 52471                             |
|        | 680       | 2,19                          | 4,15         | 0,82   | 220      | 170                      | 5         | 52681                             |
|        | 680       | 2,17                          | 4,11         | 0,82   | 220      | 170                      | 6         | 42681                             |
|        | 1 000     | 2,86                          | 5,42         | 1,20   | 150      | 115                      | 7         | 52102                             |
|        | 1 500     | 3,81                          | 7,22         | 1,80   | 110      | 85                       | 8         | 52152                             |
|        | 2 200     | 5,20                          | 9,86         | 2,64   | 80       | 60                       | 9         | 52222                             |
|        | 385       | 68                            | 0,47         | 0,89   | 0,16     | 2200                     | 1400      | 1                                 |
| 100    |           | 0,64                          | 1,21         | 0,23   | 1500     | 940                      | 2         | 58101                             |
| 150    |           | 0,90                          | 1,71         | 0,35   | 1000     | 620                      | 3         | 58151                             |
| 220    |           | 1,15                          | 2,18         | 0,51   | 680      | 420                      | 4         | 58221                             |
| 330    |           | 1,53                          | 2,90         | 0,77   | 450      | 270                      | 5         | 58331                             |
| 330    |           | 1,52                          | 2,88         | 0,77   | 450      | 270                      | 6         | 48331                             |
| 470    |           | 1,96                          | 3,72         | 1,09   | 320      | 190                      | 7         | 58471                             |
| 680    |           | 2,70                          | 5,12         | 1,58   | 220      | 135                      | 8         | 58661                             |
| 1 000  |           | 3,70                          | 7,02         | 2,31   | 180      | 125                      | 9         | 58102                             |

**Capacitance**

Nominal capacitance values at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following conditions are met:

- (a) max. positive voltage on anode (d.c. + peak a.c.)
- (b) max. positive voltage on cathode (reverse voltage)

Surge voltage = max. permissible voltage for short periods

| core temperature $\blacktriangle$ |  |
|-----------------------------------|--|
| < 60 $^{\circ}\text{C}$           | 60 to 95 $^{\circ}\text{C}$              |
| $1,1 \times U_R$                  | $U_R$                                    |
| $\leq 1,1 \times U_R$             | $\leq U_R$                               |
| 1 V                               |  |
| $1,25 \times U_R$                 | $1,15 \times U_R (\leq 100\text{ V})$    |
|                                   | $1,15 \times U_R (200\text{ V version})$ |
|                                   | $1,1 \times U_R (385\text{ V version})$  |
| 1 V                               |  |

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods

**Ripple current \*\***

Maximum permissible r.m.s. ripple current

at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$  or 20 kHz and  $T_{amb} = 70\text{ }^{\circ}\text{C}$

at 100 Hz and other temperatures

at other frequencies and  $T_{amb} = 85\text{ }^{\circ}\text{C}$

see Table 2

see Table 3

see Table 4

**Table 3**

| ambient temperature $^{\circ}\text{C}$ | multiplier of max. ripple current |
|--|-----------------------------------|
| 85                                     | 1,00                              |
| 80                                     | 1,22                              |
| 75                                     | 1,41                              |
| 70                                     | 1,58                              |
| 65                                     | 1,73                              |
| 60                                     | 1,87                              |
| 55                                     | 2,00                              |
| 50                                     | 2,12                              |
| 45                                     | 2,24                              |
| $\leq 40$                              | 2,35                              |

**Table 4**

| frequency Hz | multiplier of max. ripple current $\sqrt{r}$ |
|--------------|--|
| 50           | 0,83   |
| 100          | 1,00   |
| 200          | 1,10   |
| 400          | 1,15   |
| 1000         | 1,19   |
| $\geq 2000$  | 1,20   |

$\blacktriangle$  See Introduction, section 5, "Ripple current".

\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r \max^2$$

$I_r \max$  = maximum ripple current at 100 Hz and applicable ambient temperature

$I_n$  = ripple current at a certain frequency

$\sqrt{r_n}$  = multiplying factor at same frequency (Table 4).

### Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

### D.C. leakage current

Maximum d.c. leakage current 1 min after application  
of the rated voltage at  $T_{amb} = 20\text{ }^\circ\text{C}$

see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

If owing to prolonged storage and/or storage at an excessive temperature the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

### Impedance

Maximum impedance at 10 kHz and  $T_{amb} = 20\text{ }^\circ\text{C}$   
measured by means of a four-terminal circuit  
(Thomson circuit)

see Table 2

### Equivalent series resistance (ESR)

Maximum ESR at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$

see Table 2

### Inductance (ESL)

Case sizes 1 and 2

max. 25 nH

Case sizes 3, 4 and 5

max. 30 nH

Case sizes 6, 7, 8 and 9

max. 35 nH

## OPERATIONAL DATA

### Category temperature range

For  $U_R \leq 63\text{ V}$

-55 to +85  $^\circ\text{C}$

For  $U_R > 63\text{ V}$

-40 to +85  $^\circ\text{C}$

### Life expectancy

Typical life time

at  $T_{amb} = 85\text{ }^\circ\text{C}$

> 5000 h

at  $T_{amb} = 40\text{ }^\circ\text{C}$

> 100 000 h

Shelf life at 0 V and  $T_{amb} = 85\text{ }^\circ\text{C}$

500 h

### Failure rate

Failure rate, catastrophic, at rated voltage,  
 $T_{amb} = 40\text{ }^\circ\text{C}$  and confidence level 60%

<  $10^{-7}$

#### PACKING

The capacitors are packed in boxes containing 100 pieces.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test.

The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

For the 385 V version the d.c. leakage current and  $\tan \delta$  measurements of the reverse voltage test (sub clause 9.16 IEC 384-4) should be carried out after 250 h,  $U_R$  in forward polarity.

Note: Capacitors 2222 051 and 2222 053 are large types, long-life grade.





## ALUMINIUM ELECTROLYTIC CAPACITORS

- Low-leakage version of 2222 030/031 series
- Miniature type
- Axial leads
- Long life
- General and industrial applications
- Alternative for tantalum capacitors



## QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range (E6 series)    | 0,33 to 68 $\mu\text{F}$                |
| Tolerance on nominal capacitance         | -10 to + 50%                            |
| Rated voltage range, $U_R$ (R5 series)   | 6,3 to 25 V                             |
| Leakage current after 2 min              | 0,002 CU or 0,7 $\mu\text{A}$           |
| Category temperature range               | -55 to + 85 $^{\circ}\text{C}$          |
| Endurance test at 85 $^{\circ}\text{C}$  | 2000 h                                  |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ | 500 h                                   |
| Basic specification                      | IEC 384-4, long-life grade;<br>DIN41316 |
| Climatic category                        |   |
| IEC 68                                   | 55/085/56                               |
| DIN 40040                                | FPF                                     |

Selection chart for  $C_{\text{nom}} \cdot U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |
|-----------------------------------|-----------|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 |
| 0,33                              |           |    |    | 2  |
| 0,47                              |           |    |    | 2  |
| 0,68                              |           |    |    | 2  |
| 1                                 |           |    |    | 2  |
| 1,5                               |           |    |    | 2  |
| 2,2                               |           |    |    | 2  |
| 3,3                               |           |    |    | 2  |
| 4,7                               |           |    |    | 2  |
| 6,8                               |           |    | 2  | 2  |
| 10                                |           | 2  | 2  | 3  |
| 15                                | 2         |    | 2  | 3  |
| 22                                |           | 2  | 3  |    |
| 33                                | 2         |    | 3  |    |
| 47                                |           | 3  |    |    |
| 68                                | 3         |    |    |    |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 2         | $\emptyset$ 4,5 x 10    |
| 3         | $\emptyset$ 6 x 10      |

## APPLICATION

These capacitors are suited for those applications where a low leakage current is required. In many cases they are a cost-effective substitute for tantalum capacitors. The capacitors are mainly used for high impedance coupling and decoupling purposes in consumer applications, such as audio and television circuits, and in industrial applications such as measuring and regulating circuits. Other applications are in timing and delay circuits with large time constant. The taped versions are extremely suitable for automatic insertion and for cutting and forming equipment.

## DESCRIPTION

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case, which is insulated with a blue plastic sleeve.

They have axial soldered-copper leads, and are supplied on bandoliers on reels.

## MECHANICAL DATA

Dimensions in mm

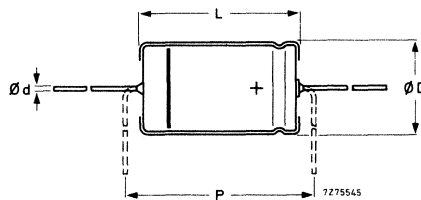


Fig. 1 See Table 1 for dimensions d, D, L and P.

Table 1

| case size | dimensions |                  |                  |                  |                  |                  | mass approx.<br>g |
|-----------|------------|------------------|------------------|------------------|------------------|------------------|-------------------|
|           | d          | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                   |
| 2         | 0,6        | 4,5              | 10,0             | 5,0              | 10,5             | 15               | 0,50              |
| 3         | 0,6        | 6,0              | 10,0             | 6,3              | 10,5             | 15               | 0,70              |

## Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance;
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal.

## Mounting

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameter is  $0,8 + 0,1$  mm.

## Minimum atmospheric pressure

8,5 kPa

## PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled; caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| $U_R$ | nom. cap.     | max. r.m.s. ripple current at $T_{amb} = 85^\circ\text{C}$ | max. d.c leakage current at $U_R$ after 2 min. | max. $\tan \delta$ | max. impedance at 10 kHz | case size | catalogue number 2222 065 followed by |
|-------|---------------|--|--|--------------------|--------------------------|-----------|---------------------------------------|
| V     | $\mu\text{F}$ | mA   | $\mu\text{A}$                                  |                    | $\Omega$                 |           |                                       |
| 6,3   | 15            | 26,5   | 0,7  | 0,16               | 8                        | 2         | 23159                                 |
|       | 33            | 39   | 0,7  | 0,16               | 3,6                      | 2         | 23339                                 |
|       | 68            | 67   | 0,9  | 0,16               | 1,8                      | 3         | 23689                                 |
| 10    | 10            | 23   | 0,7  | 0,14               | 9                        | 2         | 24109                                 |
|       | 22            | 34   | 0,7  | 0,14               | 4,1                      | 2         | 24229                                 |
|       | 47            | 60   | 0,9  | 0,14               | 1,9                      | 3         | 24479                                 |
| 16    | 6,8           | 21   | 0,7  | 0,12               | 10                       | 2         | 25688                                 |
|       | 10            | 25   | 0,7  | 0,12               | 7                        | 2         | 25109                                 |
|       | 15            | 31   | 0,7  | 0,12               | 4,7                      | 2         | 25159                                 |
|       | 22            | 44   | 0,7  | 0,12               | 3,2                      | 3         | 25229                                 |
|       | 33            | 54   | 1,1  | 0,12               | 2,1                      | 3         | 25339                                 |
| 25    | 0,33          | 5,6  | 0,7  | 0,08               | 170                      | 2         | 26337                                 |
|       | 0,47          | 6,6  | 0,7  | 0,08               | 120                      | 2         | 26477                                 |
|       | 0,68          | 8,0  | 0,7  | 0,08               | 81                       | 2         | 26687                                 |
|       | 1,0           | 9,7  | 0,7  | 0,08               | 55                       | 2         | 26108                                 |
|       | 1,5           | 11,2   | 0,7  | 0,09               | 37                       | 2         | 26158                                 |
|       | 2,2           | 13,5   | 0,7  | 0,09               | 25                       | 2         | 26228                                 |
|       | 3,3           | 16,6   | 0,7  | 0,09               | 17                       | 2         | 26338                                 |
|       | 4,7           | 20   | 0,7  | 0,09               | 12                       | 2         | 26478                                 |
|       | 6,8           | 24   | 0,7  | 0,09               | 8,1                      | 2         | 26688                                 |
|       | 10            | 34   | 0,7  | 0,09               | 5,5                      | 3         | 26109                                 |
|       | 15            | 42   | 0,8  | 0,09               | 3,7                      | 3         | 26159                                 |

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50%

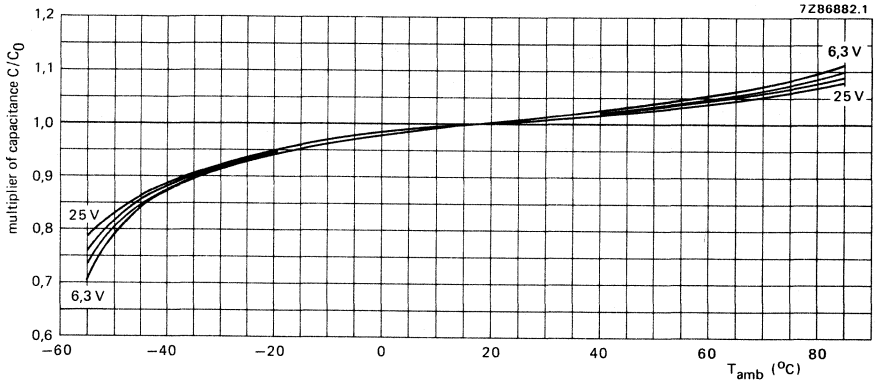


Fig. 2 Multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at  $20\text{ }^{\circ}\text{C}$ , 100 Hz.

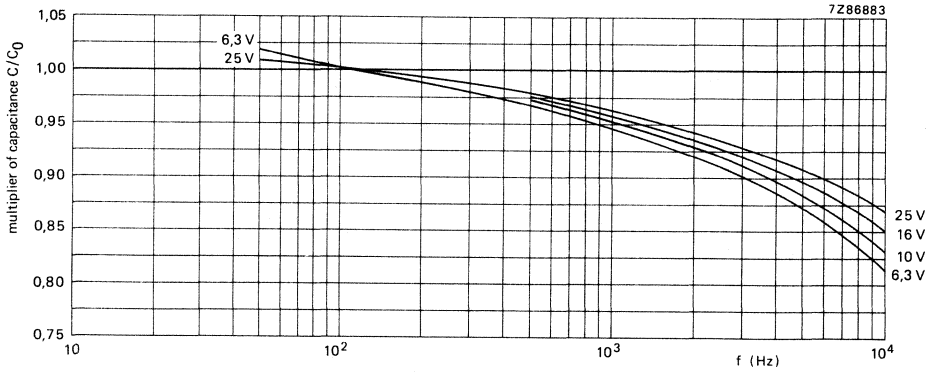


Fig. 3 Multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at  $20\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

|   |  |
|---|--|
| Max. permissible voltage at core temperature $\leq 95\text{ }^{\circ}\text{C}$ <sup>▲</sup>       | $1,6 \times U_R$                           |
| Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met: |  |
| (a) max. (d.c. + peak a.c.) voltage   | $1,6 \times U_R$                           |
| (b) max. peak a.c. voltage without d.c. voltage applied   | 2 V  |
| (c) momentary value of applied voltage  | between $1,6 \times U_R$ and $-2\text{ V}$ |
| Surge voltage = max. permissible voltage for short periods  | $1,6 \times U_R$                           |
| Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods             | 2 V  |

**Ripple current\*\***

|   |                                 |
|---|---------------------------------|
| Maximum permissible r.m.s. ripple current at      |                                 |
| 100 Hz and $T_{amb} = 85\text{ }^{\circ}\text{C}$ | see Table 2                     |
| 100 Hz and $T_{amb} = 40\text{ }^{\circ}\text{C}$ | 2,24 x values stated in Table 2 |

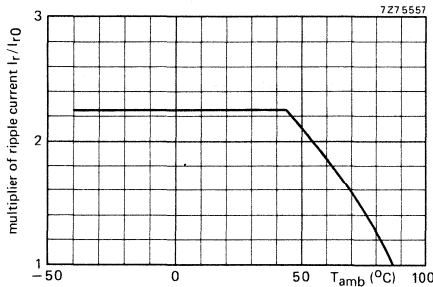


Fig. 4 Multiplier of ripple current as a function of ambient temperature;  $I_{r0}$  = ripple current at  $85\text{ }^{\circ}\text{C}$ , 100 Hz.

- ▲ See Introduction, section 5, "Ripple current".
- \* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.
- \*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

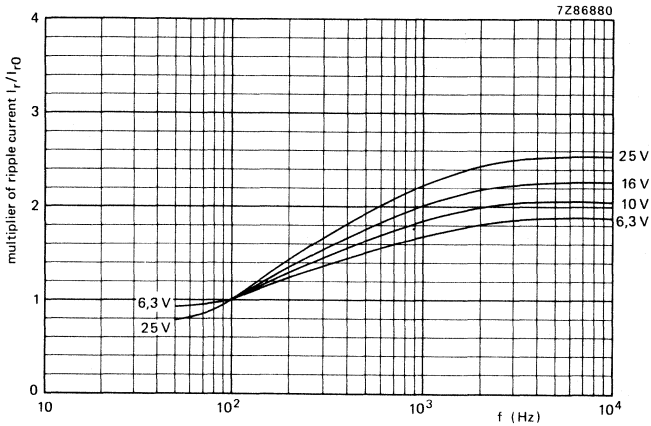


Fig. 5 Multiplier of ripple current as a function of frequency;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 2 min after application  
of  $U_R$ , at  $T_{amb} = 20$  °C

see Table 2 (0,002 CU or 0,7 μA, whichever is greater)

If owing to prolonged storage and/or storage at an excessive temperature (> 40 °C) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

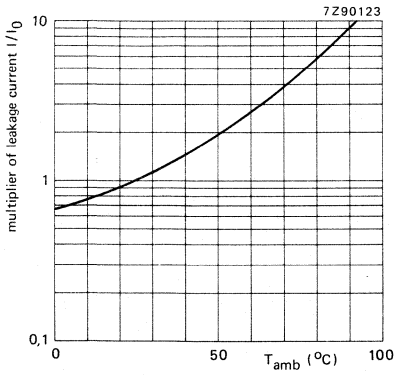


Fig. 6 Multiplier of d.c. leakage current as a function of ambient temperature;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

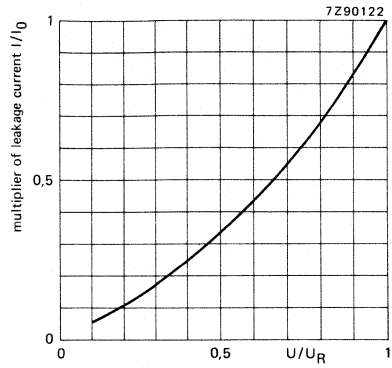


Fig. 7 Multiplier of d.c. leakage current as a function of  $U/U_R$ ;  $I_0$  = d.c. leakage current during continuous operation at 25 °C and  $U_R$ .

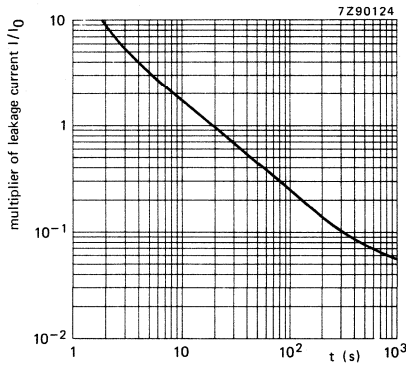


Fig. 8 Multiplier of typical d.c. leakage current as a function of time;  $I_0$  = d.c. leakage current value as specified in Table 2.

**Tan  $\delta$**  (dissipation factor)

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ ,  
measured by means of a four-terminal circuit  
(Thomson circuit)

see Table 2

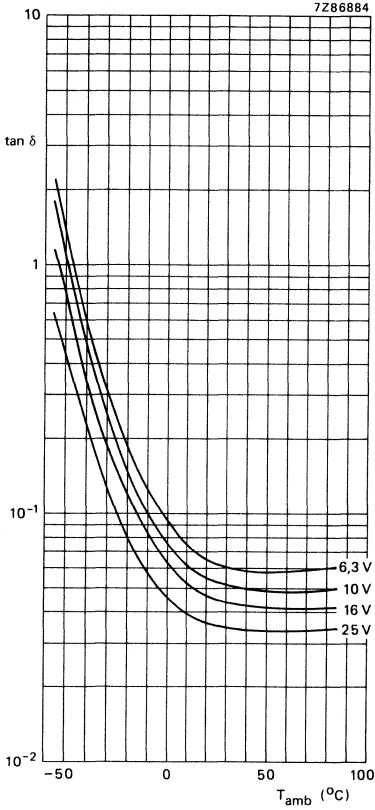


Fig. 9 Typical  $\tan \delta$  as a function of ambient temperature at 100 Hz.

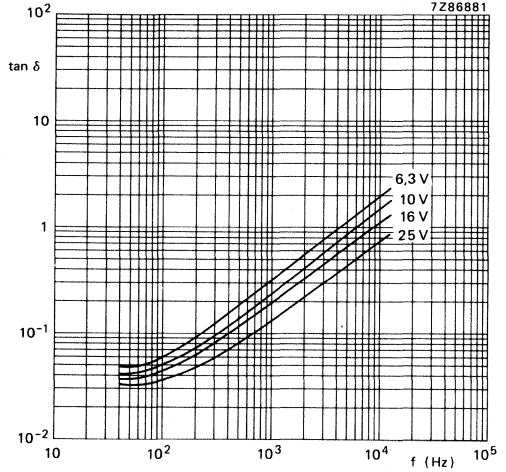


Fig. 10 Typical  $\tan \delta$  as a function of frequency at 25  $^\circ\text{C}$ .



**Equivalent series resistance (ESR)**

$$\text{ESR} = \tan \delta / \omega C$$

Maximum  $\tan \delta$  and  $C$  at 100 Hz and  $T_{\text{amb}} = 25 \text{ }^\circ\text{C}$

see Table 2

**Equivalent series inductance (ESL)**

Case size 2

typ. 17 nH

Case size 3

typ. 30 nH

**Impedance (Z)**

Maximum impedance at  $T_{\text{amb}} = 20 \text{ }^\circ\text{C}$  and 10 kHz, measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

$$z = Z \times C_{\text{nom}}, \text{ at } 10 \text{ kHz}$$

see Table 3

**Table 3**

| $T_{\text{amb}}$ | $z = Z \times C_{\text{nom}} (\Omega \mu\text{F})$ at $U_R$ ; at 10 kHz |           |           |          |
|------------------|---|-----------|-----------|----------|
|                  | 6,3 V   | 10 V      | 16 V      | 25 V     |
| +20 °C           | ≤ 120   | ≤ 90      | ≤ 70      | ≤ 55     |
| -25 °C           | ≤ 560   | ≤ 400     | ≤ 300     | ≤ 180    |
| -40 °C           | ≤ 1500  | ≤ 1100    | ≤ 900     | ≤ 500    |
| -55 °C           | typ. 3300   | typ. 2400 | typ. 1500 | typ. 850 |

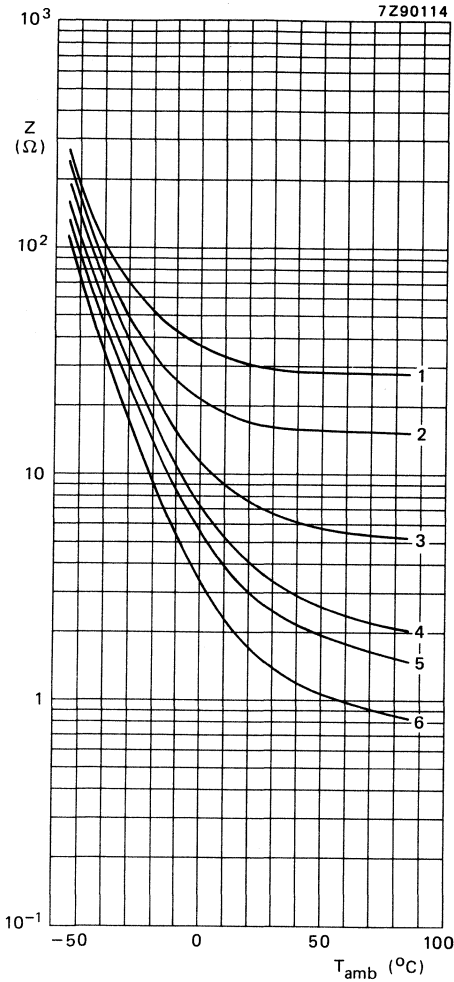


Fig. 11 Typical impedance as a function of ambient temperature at 10 kHz; **case size 2:**  
 curve 1 = 0,47  $\mu$ F, 25 V;  
 curve 2 = 1  $\mu$ F, 25 V;  
 curve 3 = 3,3  $\mu$ F, 25 V;  
 curve 4 = 6,8  $\mu$ F, 25 V;  
 curve 5 = 10  $\mu$ F, 10 V;  
 curve 6 = 22  $\mu$ F, 10 V.

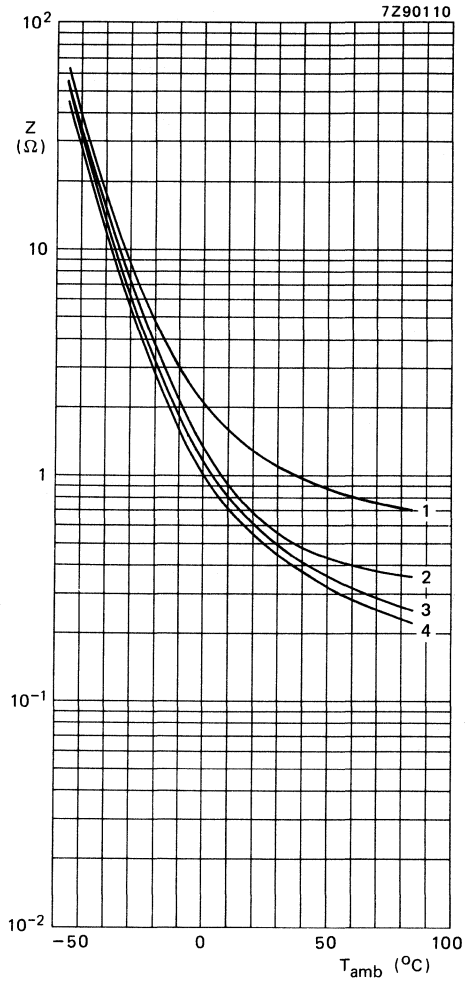


Fig. 12 Typical impedance as a function of ambient temperature at 10 kHz; **case size 3:**  
 curve 1 = 10  $\mu$ F, 25 V;  
 curve 2 = 22  $\mu$ F, 16 V;  
 curve 3 = 47  $\mu$ F, 10 V;  
 curve 4 = 68  $\mu$ F, 6,3 V.

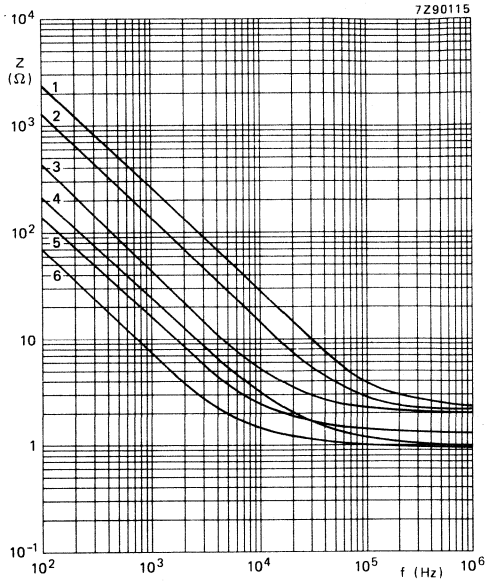


Fig. 13 Typical impedance as a function of frequency at 20 °C; case size 2:  
 curve 1 = 0,47  $\mu$ F, 25 V;                      curve 4 = 6,8  $\mu$ F, 25 V;  
 curve 2 = 1  $\mu$ F, 25 V;                              curve 5 = 10  $\mu$ F, 10 V;  
 curve 3 = 3,3  $\mu$ F, 25 V;                          curve 6 = 22  $\mu$ F, 10 V.

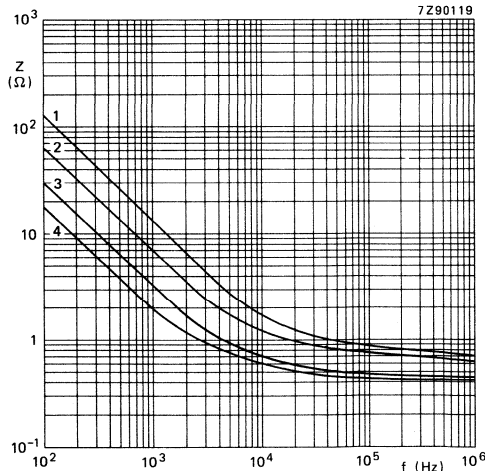


Fig. 14 Typical impedance as a function of frequency at 20 °C; case size 3:  
 curve 1 = 10  $\mu$ F, 25 V;                              curve 3 = 47  $\mu$ F, 10 V;  
 curve 2 = 22  $\mu$ F, 16 V;                          curve 4 = 68  $\mu$ F, 6,3 V.

**OPERATIONAL DATA**

|  |                |
|--|----------------|
| Category temperature range                     | -55 to + 85 °C |
| Typical life time                              |                |
| at $T_{amb} = 85\text{ °C}$                    | 3000 h         |
| at $T_{amb} = 40\text{ °C}$                    | 70 000 h       |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h          |

**PACKING**

The capacitors are supplied on bandoliers on reels. The number of capacitors per reel is 3000 for case size 2, and 1000 for case size 3.

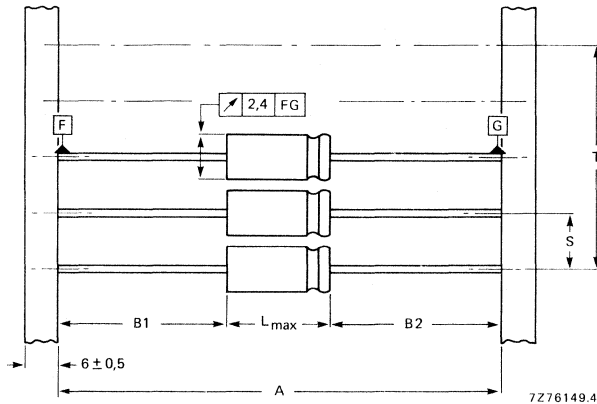


Fig. 15 Capacitors on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 4 for dimensions A, S, T and L.  $|B1-B2| = \text{max. } 1,4\text{ mm}$ .

**Table 4**

Dimensions in mm

| case size | A              | S            | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|----------------|--------------|--------------------------------|------------------|-----------|
|           |                |              | $n < 50$                       | $50 < n < 100$   |           |
| 2         | $63,5 \pm 1,5$ | $5 \pm 0,4$  | $5 (n-1) \pm 2$                | $5 (n-1) \pm 4$  | 10,5      |
| 3         | $63,5 \pm 1,5$ | $10 \pm 0,4$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 10,5      |

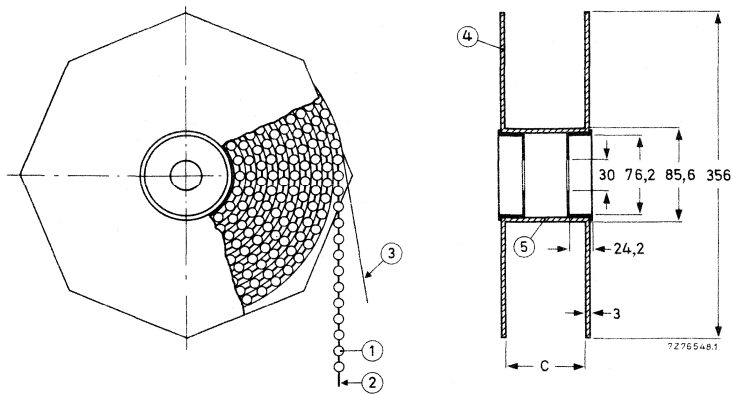


Fig. 16 Capacitors on bandoliers on reel; dimension C is 83,5 mm; the overall width of the reel is 94,5 mm.

- |               |              |
|---------------|--------------|
| 1 = capacitor | 4 = flange   |
| 2 = bandolier | 5 = cylinder |
| 3 = paper     |              |

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test, 2000 h, 85 °C*, the capacitors meet the following requirements:

$\Delta C/C \leq \pm 15\%$ , for  $U_R = 10$  to 25 V;

$\Delta C/C \leq +15\%$ ,  $-25\%$  for  $U_R = 6,3$  V;

$\tan \delta \leq 130\%$  of specified value;

d.c. leakage current  $\leq$  specified value;

impedance at 10 kHz  $\leq 200\%$  of specified value.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.


### Note:

Capacitors 2222 065 are miniature types, long-life grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Surface mounted type
- Supplied in rail or in blister tape
- General applications



## QUICK REFERENCE DATA

Nominal capacitance range (E6 series)

0,1 to 22  $\mu\text{F}$ 

Tolerance on nominal capacitance

-10 to + 50% or  $\pm 20\%$ Rated voltage range,  $U_R$  (R5 series)

6,3 to 63 V

Category temperature range

-40 to + 85  $^{\circ}\text{C}$ Endurance test at 85  $^{\circ}\text{C}$ 

1000 h

Shelf life at 0 V, 85  $^{\circ}\text{C}$ 

500 h

Resistance to soldering heat

260  $^{\circ}\text{C}$ , 10 s; immersion in solder permitted

Basic specifications

IEC 384-4, G.P. grade

DIN 41332, type II

Climatic category

IEC 68

40/085/56

DIN 40040

GPF

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 40 | 63 |
| 0,1                               |           |    |    |    |    | 1a |
| 0,15                              |           |    |    |    |    | 1a |
| 0,22                              |           |    |    |    |    | 1a |
| 0,33                              |           |    |    |    |    | 1a |
| 0,47                              |           |    |    |    |    | 1a |
| 0,68                              |           |    |    |    |    | 1a |
| 1                                 |           |    |    |    |    | 1a |
| 1,5                               |           |    |    |    |    | 1a |
| 2,2                               |           |    |    |    | 1a | 1  |
| 3,3                               |           |    |    | 1a |    | 1  |
| 4,7                               |           |    | 1a |    | 1  |    |
| 6,8                               |           | 1a | 1  | 1  |    |    |
| 10                                | 1a        |    | 1  |    |    |    |
| 15                                |           | 1  |    |    |    |    |
| 22                                | 1         |    |    |    |    |    |

| case size | maximum dimensions (mm)<br>length x width x height |
|-----------|--|
| 1a        | 9 x 4 x 4  |
| 1         | 12 x 4 x 4   |

**APPLICATION**

These capacitors with high CU-product per unit volume are for surface mounted assembly. They are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and television circuits. Other applications are in timing and delay circuits. The capacitors are suitable for automatic placement.

**DESCRIPTION**

The capacitors have highly etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in a rectangular plastic case with flat soldered-copper tags.

The capacitors are supplied in rails in boxes or in blister tape on reel.

**MECHANICAL DATA**

Dimensions in mm

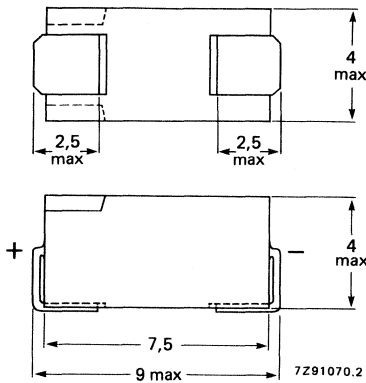


Fig. 1a Case size 1a.

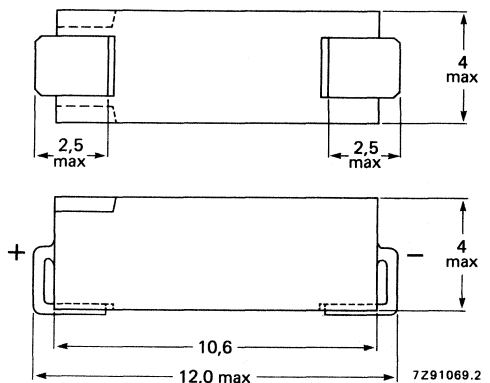


Fig. 1b Case size 1.

**Marking**

The capacitors are marked on the top with nominal capacitance, “-” sign to identify the cathode, and code for rated voltage, see Table 1. The numerals are those of the capacitance in  $\mu\text{F}$ , and the position of the letter indicating the rated voltage, marks the position of the decimal point in the capacitance value. Example: 3H3 indicates 3,3  $\mu\text{F}$ , 63 V. Bevelled edges identify the anode end.


**Table 1**

| rated voltage<br>V | code letter |
|--------------------|-------------|
| 6,3                | C           |
| 10                 | D           |
| 16                 | E           |
| 25                 | F           |
| 40                 | G           |
| 63                 | H           |



**Mounting**

The capacitors can be placed and soldered on to printed-circuit boards or on to hybrid circuits. Suitable mounting methods include those where the device is totally immersed in a solder bath (260 °C, 10 s), as in wave soldering, and reflow methods where the solder and device are heated together, as in vapour phase soldering.

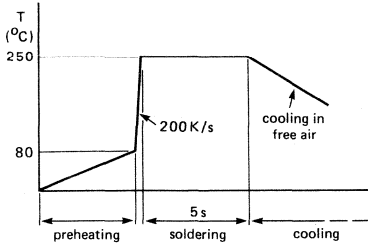

7291064

Fig. 2 Typical temperature-time curve for wave soldering.


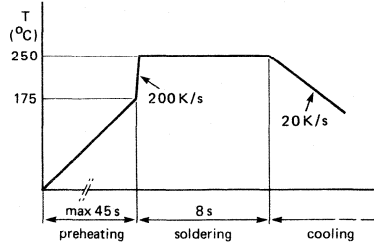


Fig. 3 Typical temperature-time curve for reflow soldering.

In both soldering processes, the capacitors reach the actual soldering temperature. The temperature rise caused by preheating and immersion in solder has no adverse effects on the life of the capacitors, provided the restrictions indicated by Fig. 4 are observed. This curve indicates the acceptable combination of temperature and time. The conditions indicated by the solid parts of the curve can be applied once to each capacitor: a preheating stage at or below one of the temperature-time points on part A, and a soldering stage at or below one of the temperature-time points on part B. Furthermore, the time in part B can be split into two, for double soldering. Typically, an example might be a preheating stage at 165 °C for 60 s followed by a first soldering stage for 4 s at 260 °C and directly followed by a second soldering stage for 6 s at 260 °C (total soldering 10 s at 260 °C).

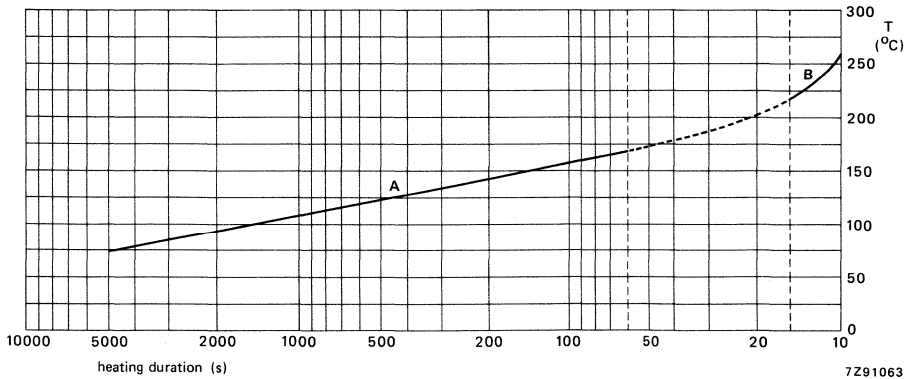

7291063

Fig. 4 Preheating (A) and soldering (B) limits for undiminished life expectancy.

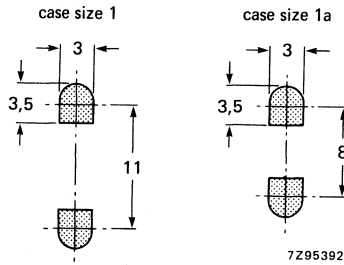


Fig. 5 Recommended dimensions of metal connection pads on printed-circuit board or substrate surface.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled; caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

**Table 2**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| UR  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85\text{ }^{\circ}\text{C}$ mA | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | max. ESR $\Omega$ | max. impedance at 10 kHz $\Omega$ | case size* | catalogue number 2222 085 followed by |                  |                    |                    |
|-----|-------------------------|--|---|--------------------|-------------------|-----------------------------------|------------|---------------------------------------|------------------|--------------------|--------------------|
|     |                         |  |   |                    |                   |                                   |            | -10/+50% in tape                      | -10/+50% in rail | $\pm 20\%$ in tape | $\pm 20\%$ in rail |
| 6,3 | 10                      | 11   | 4   | 0,30               | 48                | 20                                | 1a         | 23109                                 | 33109            | 63109              | 73109              |
|     | 22                      | 20   | 6   | 0,30               | 22                | 9                                 | 1          | 23229                                 | 33229            | 63229              | 73229              |
| 10  | 6,8                     | 10   | 4   | 0,25               | 59                | 24                                | 1a         | 24688                                 | 34688            | 64688              | 74688              |
|     | 15                      | 18   | 6   | 0,25               | 27                | 11                                | 1          | 24159                                 | 34159            | 64159              | 74159              |
| 16  | 4,7                     | 9  | 5   | 0,20               | 68                | 26                                | 1a         | 25478                                 | 35478            | 65478              | 75478              |
|     | 10                      | 16   | 6   | 0,20               | 32                | 12                                | 1          | 25109                                 | 35109            | 65109              | 75109              |
| 25  | 3,3                     | 8  | 5   | 0,18               | 87                | 27                                | 1a         | 26338                                 | 36338            | 66338              | 76338              |
|     | 6,8                     | 14   | 6   | 0,18               | 42                | 13                                | 1          | 26688                                 | 36688            | 66688              | 76688              |
| 40  | 2,2                     | 7  | 5   | 0,16               | 116               | 32                                | 1a         | 27228                                 | 37228            | 67228              | 77228              |
|     | 4,7                     | 13   | 7   | 0,16               | 54                | 15                                | 1          | 27478                                 | 37478            | 67478              | 77478              |
| 63  | 0,1                     | 2  | 4   | 0,10               | 1590              | 550                               | 1a         | 28107                                 | 38107            | 68107              | 78107              |
|     | 0,15                    | 3  | 4   | 0,10               | 1060              | 367                               | 1a         | 28157                                 | 38157            | 68157              | 78157              |
| 100 | 0,22                    | 3  | 4   | 0,10               | 723               | 250                               | 1a         | 28227                                 | 38227            | 68227              | 78227              |
|     | 0,33                    | 4  | 4   | 0,10               | 482               | 167                               | 1a         | 28337                                 | 38337            | 68337              | 78337              |
| 150 | 0,47                    | 4  | 4   | 0,10               | 339               | 117                               | 1a         | 28477                                 | 38477            | 68477              | 78477              |
|     | 0,68                    | 5  | 4   | 0,10               | 234               | 81                                | 1a         | 28687                                 | 38687            | 68687              | 78687              |
| 200 | 1                       | 6  | 4   | 0,12               | 191               | 55                                | 1a         | 28108                                 | 38108            | 68108              | 78108              |
|     | 1,5                     | 7  | 5   | 0,14               | 149               | 37                                | 1a         | 28158                                 | 38158            | 68158              | 78158              |
| 250 | 2,2                     | 11   | 6   | 0,14               | 87                | 25                                | 1          | 28228                                 | 38228            | 68228              | 78228              |
|     | 3,3                     | 13   | 7   | 0,14               | 68                | 17                                | 1          | 28338                                 | 38338            | 68338              | 78338              |

\* Case size 1a: 9 mm x 4 mm x 4 mm (max. dimensions).  
Case size 1 : 12 mm x 4 mm x 4 mm (max. dimensions).

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50% or  $\pm 20\%$

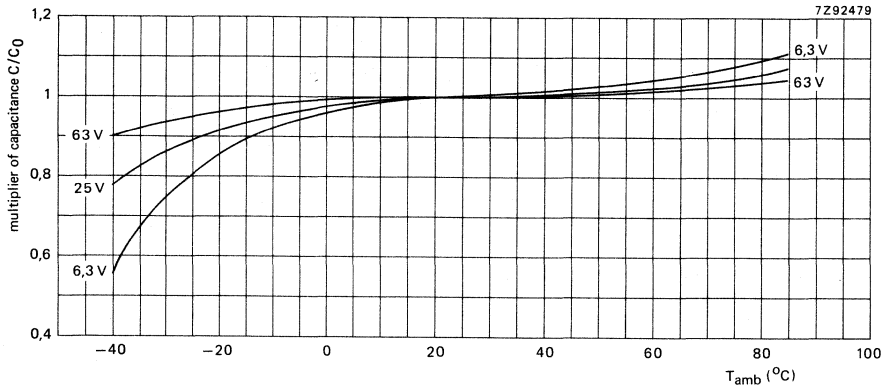


Fig. 6 Multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , 100 Hz.

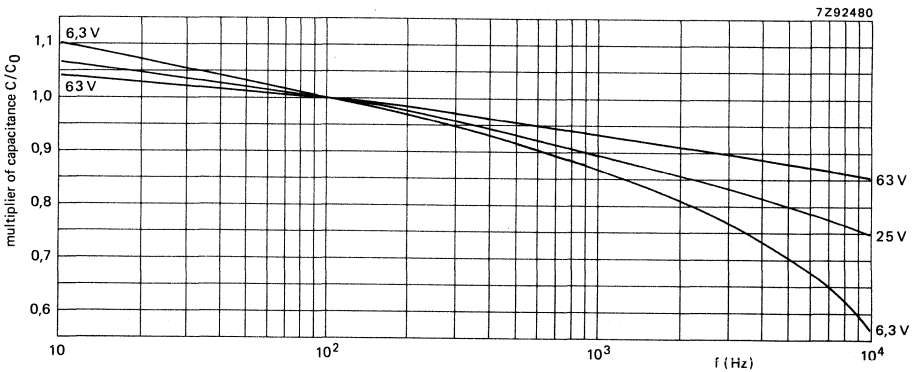


Fig. 7 Multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature ▲   |                                 |
|----------------------|---------------------------------|
| < 60 °C              | 60 to 95 °C                     |
| 1,1 x U <sub>R</sub> | U <sub>R</sub>                  |
| 1,1 x U <sub>R</sub> | U <sub>R</sub>                  |
|                      | 2 V                             |
|                      | between U <sub>R</sub> and -2 V |
| 1,2 x U <sub>R</sub> | 1,15 x U <sub>R</sub>           |
|                      | 2 V                             |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and T<sub>amb</sub> = 85 °C

see Table 2

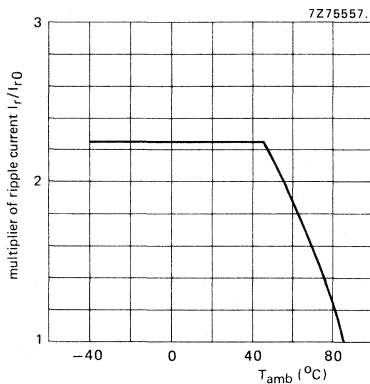


Fig. 8 Multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at T<sub>amb</sub> = 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

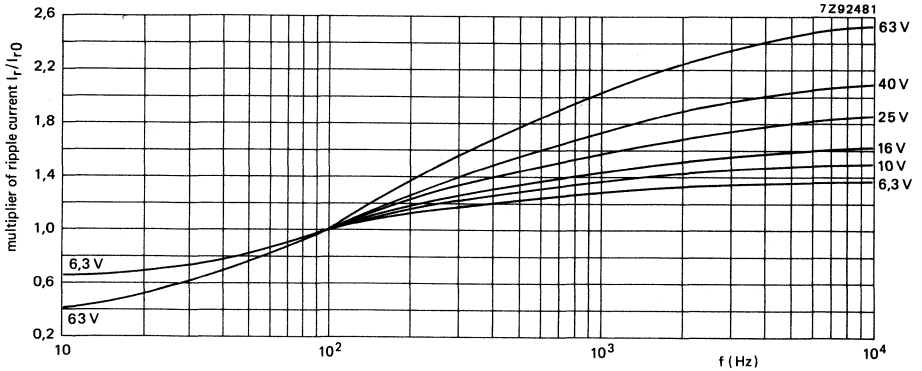


Fig. 9 Multiplier of ripple current as a function of frequency;  $I_{r0}$  = ripple current at  $T_{amb} = 85^\circ\text{C}$ , 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$   
at  $T_{amb} = 20^\circ\text{C}$

see Table 2 (0,02 CU + 3  $\mu\text{A}$ )

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20^\circ\text{C}$

see Table 2

Fig. 10 Typical tan  $\delta$  as a function of ambient temperature at 100 Hz.

- Curve 1 = 6,3 V;
- curve 2 = 10 V;
- curve 3 = 16 V;
- curve 4 = 25 V;
- curve 5 = 40 V;
- curve 6 = 1,5 to 3,3  $\mu\text{F}$ , 63 V;
- curve 7 = 0,68 and 1  $\mu\text{F}$ , 63 V;
- curve 8 = 0,22 to 0,47  $\mu\text{F}$ , 63 V;
- curve 9 = 0,1 and 0,15  $\mu\text{F}$ , 63 V.


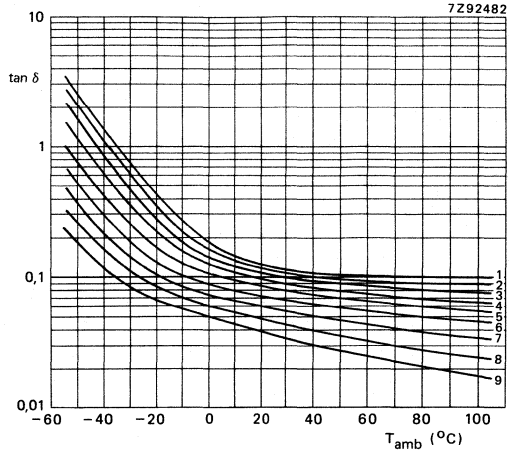


Fig. 11 Typical tan  $\delta$  as a function of frequency at  $T_{amb} = 20^\circ\text{C}$ .

- Curve 1 = 6,3 V;
- curve 2 = 10 V;
- curve 3 = 16 V;
- curve 4 = 25 V;
- curve 5 = 40 V;
- curve 6 = 1,5 to 3,3  $\mu\text{F}$ , 63 V;
- curve 7 = 0,68 and 1  $\mu\text{F}$ , 63 V;
- curve 8 = 0,22 to 0,47  $\mu\text{F}$ , 63 V;
- curve 9 = 0,1 and 0,15  $\mu\text{F}$ , 63 V.

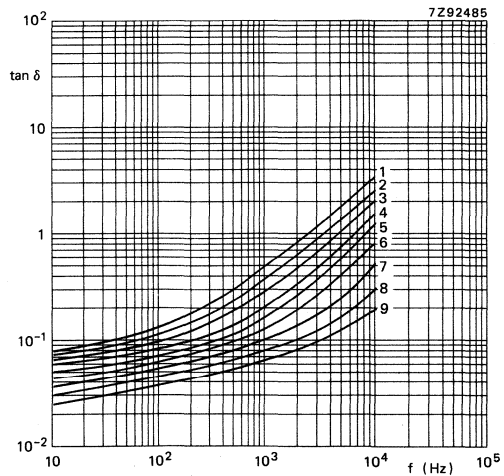

**Equivalent series resistance (ESR)**Maximum ESR at 100 Hz and  $T_{\text{amb}} = 20\text{ }^{\circ}\text{C}$ 

see Table 2

**Impedance (Z)**Maximum impedance at 10 kHz and  $T_{\text{amb}} = 20\text{ }^{\circ}\text{C}$ ,  
measured by means of a  
four-terminal circuit (Thomson circuit)

see Table 2

 $z = Z \times C_{\text{nom}}$ , at 10 kHz

see Table 3

**Table 3**

| $T_{\text{amb}}$ | $z = Z \times C_{\text{nom}} (\Omega \mu\text{F})$ at $U_R$ ; at 10 kHz |        |        |        |       |       |
|------------------|---|--------|--------|--------|-------|-------|
|                  | 6,3 V   | 10 V   | 16 V   | 25 V   | 40 V  | 63 V  |
| + 20 °C          | ≤ 200   | ≤ 160  | ≤ 120  | ≤ 90   | ≤ 70  | ≤ 55  |
| -25 °C           | ≤ 1200  | ≤ 750  | ≤ 560  | ≤ 400  | ≤ 300 | ≤ 180 |
| -40 °C           | ≤ 3200  | ≤ 2000 | ≤ 1500 | ≤ 1100 | ≤ 900 | ≤ 500 |



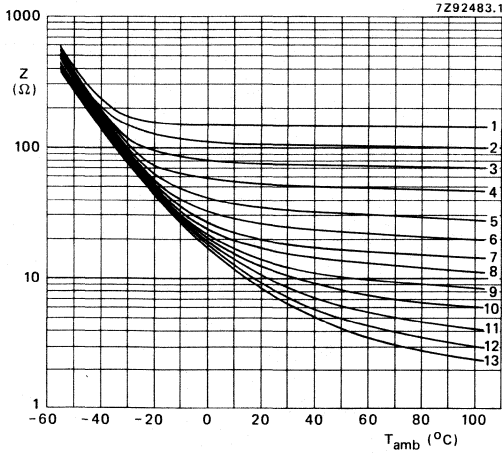


Fig. 12 Typical impedance as a function of ambient temperature at 10 kHz; case size 1a.

- Curve 1 = 0,1  $\mu$ F, 63 V;
- curve 2 = 0,15  $\mu$ F, 63 V;
- curve 3 = 0,22  $\mu$ F, 63 V;
- curve 4 = 0,33  $\mu$ F, 63 V;
- curve 5 = 0,47  $\mu$ F, 63 V;
- curve 6 = 0,68  $\mu$ F, 63 V;
- curve 7 = 1  $\mu$ F, 63 V;
- curve 8 = 1,5  $\mu$ F, 63 V;
- curve 9 = 2,2  $\mu$ F, 40 V;
- curve 10 = 3,3  $\mu$ F, 25 V;
- curve 11 = 4,7  $\mu$ F, 16 V;
- curve 12 = 6,8  $\mu$ F, 10 V;
- curve 13 = 10  $\mu$ F, 6,3 V.

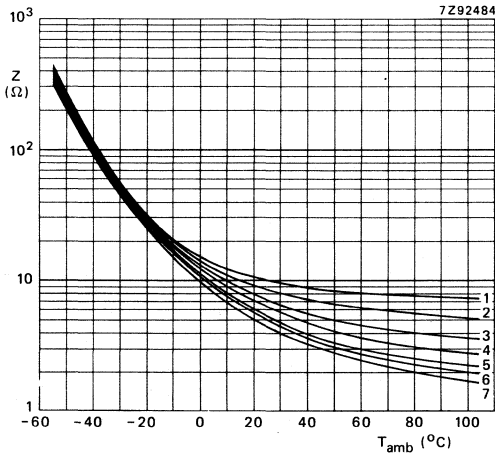


Fig. 13 Typical impedance as a function of ambient temperature at 10 kHz; case size 1.

- Curve 1 = 2,2  $\mu$ F, 63 V;
- curve 2 = 3,3  $\mu$ F, 63 V;
- curve 3 = 4,7  $\mu$ F, 40 V;
- curve 4 = 6,8  $\mu$ F, 25 V;
- curve 5 = 10  $\mu$ F, 16 V;
- curve 6 = 15  $\mu$ F, 10 V;
- curve 7 = 22  $\mu$ F, 6,3 V.

Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 1a.

- Curve 1 = 0,1  $\mu\text{F}$ , 63 V;
- curve 2 = 0,22  $\mu\text{F}$ , 63 V;
- curve 3 = 0,47  $\mu\text{F}$ , 63 V;
- curve 4 = 1  $\mu\text{F}$ , 63 V;
- curve 5 = 2,2  $\mu\text{F}$ , 40 V;
- curve 6 = 4,7  $\mu\text{F}$ , 16 V;
- curve 7 = 10  $\mu\text{F}$ , 6,3 V;


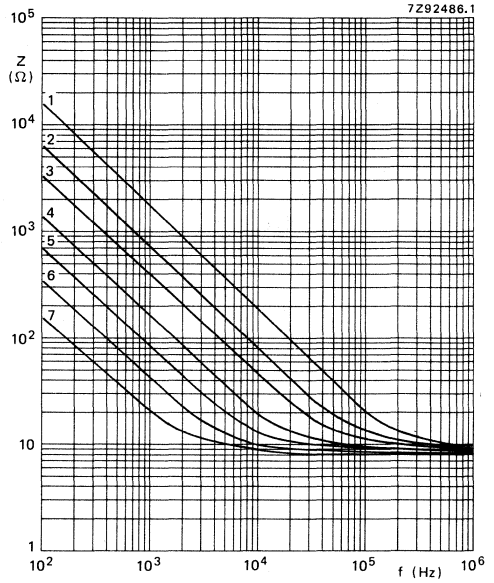


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 1.

- Curve 1 = 2,2  $\mu\text{F}$ , 63 V;
- curve 2 = 3,3  $\mu\text{F}$ , 63 V;
- curve 3 = 4,7  $\mu\text{F}$ , 40 V;
- curve 4 = 6,8  $\mu\text{F}$ , 25 V;
- curve 5 = 10  $\mu\text{F}$ , 16 V;
- curve 6 = 15  $\mu\text{F}$ , 10 V;
- curve 7 = 22  $\mu\text{F}$ , 6,3 V.

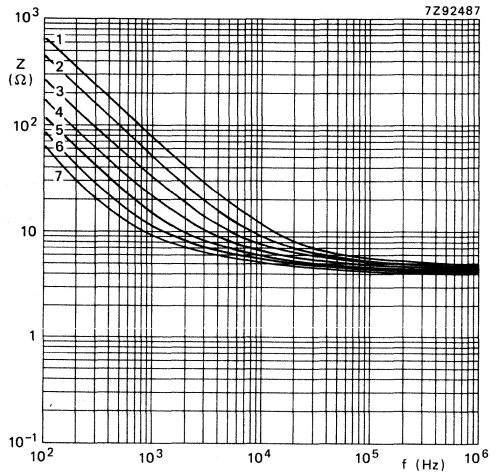

**Equivalent series inductance (ESL)**

case size 1a

typ. 13 nH

case size 1

typ. 15 nH

**OPERATIONAL DATA**


Category temperature range

-40 to + 85 °C

**PACKING**

Dimensions in mm

The capacitors are supplied in rail (100 per rail, 5000 per inner box, 20 000 per outer box), and in 16 mm blister tape of 2000 on reel.

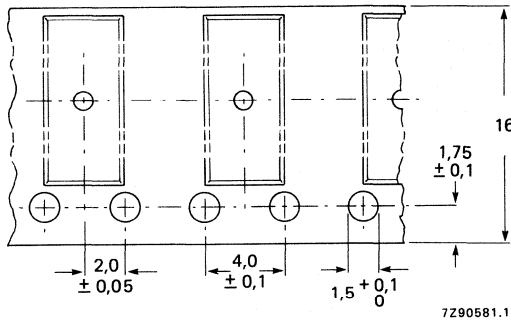

Cumulative pitch error : ≤ 0,2 mm over 10 pitches

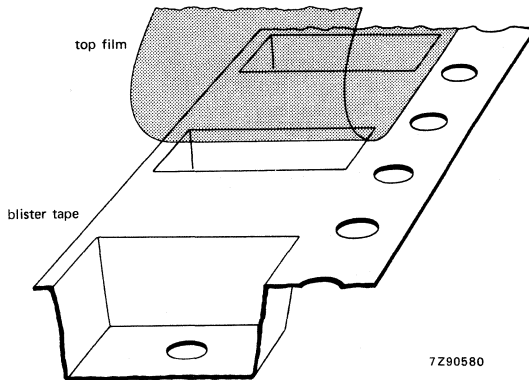


Fig. 16 Blister tape.

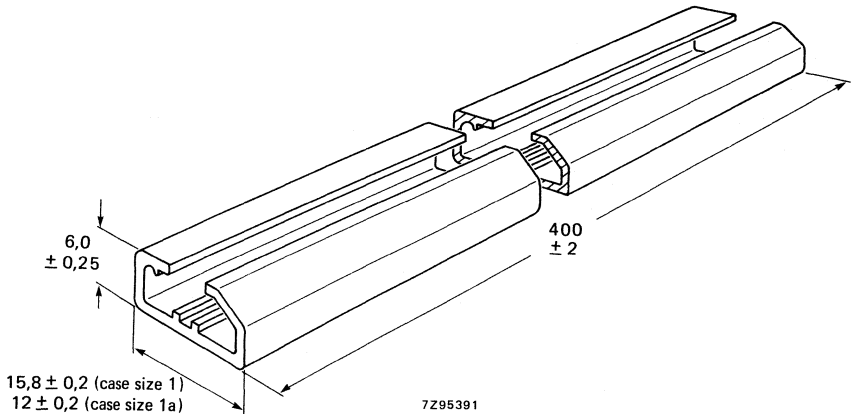


Fig. 17 Rail.

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test*, 1000 h, 85 °C, the capacitors meet the following requirements:

- $\Delta C/C \leq \pm 20\%$ ,
- $\tan \delta \leq 200\%$  of specified value,
- d.c. leakage current  $\leq$  specified value.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

*Resistance to soldering heat*:  $260 \pm 5$  °C,  $10 \pm 1$  s.

After *soldering test*, the capacitors meet the following requirements:

- $\Delta C/C \leq \pm 10\%$ ,
- $\tan \delta \leq$  specified value,
- d.c. leakage current  $\leq 200\%$  of specified value,
- no visible damage.

Note: Capacitors 2222 085 are miniature types, general purpose grade.

## ALUMINIUM ELECTROLYTIC CAPACITORS



- Miniature and small types
- Axial leads
- Long life
- Industrial applications



## QUICK REFERENCE DATA

|   |   |
|---|---|
| Nominal capacitance range (E6 series)     | 2,2 to 2200 $\mu\text{F}$   |
| Tolerance on nominal capacitance          | -10 to + 50%  |
| Rated voltage range ( $U_R$ ) (R5 series) | 6,3 to 100 V  |
| Category temperature range                | -40 to + 85 $^{\circ}\text{C}$                                      |
| Endurance test                            |   |
| at 85 $^{\circ}\text{C}$                  | 5000 h  |
| at 105 $^{\circ}\text{C}$                 | 1000 h*   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$  | 500 h   |
| Basic specification                       | IEC 384-4, long-life grade<br>DIN 41240 (IA)<br>NF C93-110 (type 1) |
| Climatic category                         |   |
| IEC 68                                    | 40/085/56   |
| DIN 40040                                 | GPF (56 days)   |
| NF C93-001                                | 554   |
| Approval                                  | CECC 30 301-027*  |

Selection chart for C- $U_R$  and relevant case sizes.

\* Not applicable to 100 V range.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |     |
|-----------------------------------|-----------|----|----|----|----|----|-----|
|                                   | 6,3       | 10 | 16 | 25 | 40 | 63 | 100 |
| 2,2                               |           |    |    |    |    | 5  |     |
| 3,3                               |           |    |    |    |    | 5  |     |
| 4,7                               |           |    |    |    |    | 5  | 5   |
| 6,8                               |           |    |    |    |    | 5  | 5   |
| 10                                |           |    |    |    |    | 5  | 5   |
| 15                                |           |    |    |    | 5  | 6  | 6   |
| 22                                |           |    |    |    | 5  | 6  | 6   |
| 33                                |           |    |    | 5  | 6  | 00 | 00  |
| 47                                |           |    |    | 5  | 6  | 00 | 00  |
| 68                                |           |    | 5  |    | 00 | 01 | 01  |
| 100                               |           | 5  |    | 6  | 01 | 02 | 02  |
| 150                               | 5         |    | 6  | 00 | 01 | 03 | 03  |
| 220                               |           | 6  | 00 | 01 | 02 |    |     |
| 330                               | 6         | 00 |    |    | 03 |    |     |
| 470                               | 00        |    | 01 | 02 |    |    |     |
| 680                               |           | 01 | 02 | 03 |    |    |     |
| 1000                              | 01        | 02 | 03 |    |    |    |     |
| 1500                              | 02        | 03 |    |    |    |    |     |
| 2200                              | 03        |    |    |    |    |    |     |

| case size | nominal dimensions (mm)      |
|-----------|------------------------------|
| 5         | $\varnothing 8 \times 18$    |
| 6         | $\varnothing 10 \times 18$   |
| 00        | $\varnothing 10 \times 30$   |
| 01        | $\varnothing 12,5 \times 30$ |
| 02        | $\varnothing 15 \times 30$   |
| 03        | $\varnothing 18 \times 30$   |

### APPLICATION

These axial-type capacitors are especially designed for those applications where extreme requirements have to be met concerning reliability and long lifetime both at high and low temperatures, such as in computer, telecommunication and telephony equipment.

### DESCRIPTION

The capacitor has etched and oxidized aluminium foil electrodes rolled up with a porous paper spacer, which separates the anode and the cathode. The spacer is impregnated with an electrolyte which retains its good characteristics both at low and high temperatures. The capacitor is housed in an aluminium case with axial soldered-copper leads, sealed with a synthetic disc and is insulated with a blue synthetic sleeve. The all-welded construction, the built-in voltage derating, and the close quality control during manufacture ensure a reliability and a life expectancy far superior to normal grade electrolytic capacitors.

### MECHANICAL DATA

Dimensions in mm

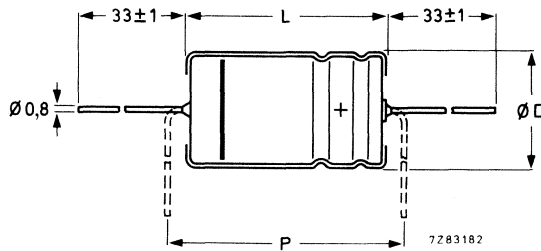


Fig. 1 Case sizes 5 and 6. For dimensions D, L and P, see Table 1.

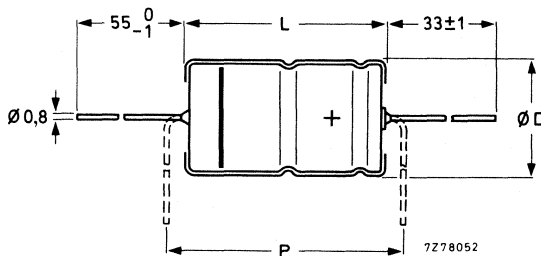


Fig. 2 Case sizes 00, 01, 02 and 03. For dimensions D, L and P, see Table 1.

Table 1

| case size | dimensions |      |                  | approx. mass g |
|-----------|------------|------|------------------|----------------|
|           | D          | L    | P <sub>min</sub> |                |
| 5         | 8,0        | 18,0 | 25               | 1,8            |
| 6         | 10,0       | 18,0 | 25               | 2,5            |
| 00        | 10,0       | 30,0 | 35               | 4,3            |
| 01        | 12,5       | 30,0 | 35               | 6,6            |
| 02        | 15,0       | 30,0 | 35               | 8,5            |
| 03        | 18,0       | 30,0 | 35               | 11,2           |

**Marking**

The capacitors are marked with: nominal capacitance, rated voltage, tolerance on capacitance, group number 108.3, maximum temperature, code of origin, date code, a band to identify the negative terminal and “+” signs for positive terminal.

**Mounting**

The capacitors may be mounted in any position by their leads (see also Tests and requirements in the Introduction).

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C (mA) * | max. d.c. leakage current at U <sub>R</sub> after 1 min<br>μA | max. tan δ * | typ. ESR * | impedance at 100 kHz |      | case size | catalogue number |
|----------------|-----------|---|---|--------------|------------|----------------------|------|-----------|------------------|
|                |           |   |   |              |            | Ω                    |      |           |                  |
| V              | μF        |   |   |              | Ω          | max.                 | typ. |           |                  |
| 6,3            | 150       | 130   | 10  | 0,20         | 1,06       | 1,60                 | 0,70 | 5         | 2222 108 33151   |
|                | 330       | 220   | 17  | 0,20         | 0,49       | 0,84                 | 0,36 | 6         |                  |
|                | 470       | 325   | 22  | 0,20         | 0,34       | 0,42                 | 0,18 | 00        |                  |
|                | 1000      | 470   | 42  | 0,20         | 0,16       | 0,30                 | 0,13 | 01        |                  |
|                | 1500      | 630   | 60  | 0,20         | 0,11       | 0,22                 | 0,10 | 02        |                  |
|                | 2200      | 920   | 85  | 0,20         | 0,09       | 0,19                 | 0,09 | 03        |                  |
| 10             | 100       | 120   | 10  | 0,15         | 1,27       | 1,60                 | 0,70 | 5         | 34101            |
|                | 220       | 205   | 17  | 0,15         | 0,57       | 0,84                 | 0,36 | 6         | 34221            |
|                | 330       | 325   | 24  | 0,15         | 0,38       | 0,42                 | 0,18 | 00        | 34331            |
|                | 680       | 470   | 45  | 0,15         | 0,19       | 0,30                 | 0,13 | 01        | 34681            |
|                | 1000      | 630   | 65  | 0,15         | 0,13       | 0,22                 | 0,10 | 02        | 34102            |
|                | 1500      | 920   | 95  | 0,15         | 0,09       | 0,19                 | 0,09 | 03        | 34152            |
| 16             | 68        | 110   | 11  | 0,12         | 1,40       | 1,60                 | 0,70 | 5         | 35689            |
|                | 150       | 190   | 18  | 0,12         | 0,63       | 0,84                 | 0,36 | 6         | 35151            |
|                | 220       | 270   | 25  | 0,12         | 0,44       | 0,42                 | 0,18 | 00        | 35221            |
|                | 470       | 360   | 50  | 0,12         | 0,21       | 0,30                 | 0,13 | 01        | 35471            |
|                | 680       | 500   | 70  | 0,12         | 0,14       | 0,22                 | 0,10 | 02        | 35681            |
|                | 1000      | 650   | 100   | 0,12         | 0,10       | 0,19                 | 0,09 | 03        | 35102            |
| 25             | 33        | 85  | 8   | 0,10         | 2,41       | 1,60                 | 0,70 | 5         | 36339            |
|                | 47        | 100   | 11  | 0,10         | 1,70       | 1,60                 | 0,70 | 5         | 36479            |
|                | 100       | 170   | 19  | 0,10         | 0,80       | 0,84                 | 0,36 | 6         | 36101            |
|                | 150       | 270   | 26  | 0,10         | 0,53       | 0,42                 | 0,18 | 00        | 36151            |
|                | 220       | 360   | 37  | 0,10         | 0,36       | 0,30                 | 0,13 | 01        | 36221            |
|                | 470       | 500   | 75  | 0,10         | 0,17       | 0,22                 | 0,10 | 02        | 36471            |
| 40             | 680       | 650   | 105   | 0,10         | 0,12       | 0,19                 | 0,09 | 03        | 36681            |
|                | 15        | 65  | 6   | 0,08         | 4,24       | 1,60                 | 0,70 | 5         | 37159            |
|                | 22        | 80  | 9   | 0,08         | 2,89       | 1,60                 | 0,70 | 5         | 37229            |
|                | 33        | 110   | 12  | 0,08         | 1,93       | 0,84                 | 0,36 | 6         | 37339            |
|                | 47        | 130   | 15  | 0,08         | 1,36       | 0,84                 | 0,36 | 6         | 37479            |
|                | 68        | 195   | 20  | 0,08         | 0,93       | 0,42                 | 0,18 | 00        | 37689            |
| 63             | 100       | 245   | 28  | 0,08         | 0,63       | 0,30                 | 0,13 | 01        | 37101            |
|                | 150       | 280   | 40  | 0,08         | 0,43       | 0,30                 | 0,13 | 01        | 37151            |
|                | 220       | 360   | 55  | 0,08         | 0,34       | 0,22                 | 0,10 | 02        | 37221            |
|                | 330       | 495   | 85  | 0,08         | 0,20       | 0,19                 | 0,09 | 03        | 37331            |
|                | 2,2       | 25  | 1,5**   | 0,08         | 28,9       | 1,60                 | 0,70 | 5         | 38228            |
|                | 3,3       | 30  | 2**   | 0,08         | 19,3       | 1,60                 | 0,70 | 5         | 38338            |
| 63             | 4,7       | 35  | 3**   | 0,08         | 13,5       | 1,60                 | 0,70 | 5         | 38478            |
|                | 6,8       | 45  | 4**   | 0,08         | 9,36       | 1,60                 | 0,70 | 5         | 38688            |
|                | 10        | 50  | 6   | 0,08         | 6,37       | 1,60                 | 0,70 | 5         | 38109            |
|                | 15        | 75  | 10  | 0,08         | 2,90       | 0,84                 | 0,36 | 6         | 38159            |
|                | 22        | 90  | 12  | 0,08         | 4,25       | 0,84                 | 0,36 | 6         | 38229            |
|                | 33        | 125   | 17  | 0,08         | 1,93       | 0,42                 | 0,18 | 00        | 38339            |
|                | 47        | 150   | 22  | 0,08         | 1,36       | 0,42                 | 0,18 | 00        | 38479            |
|                | 68        | 195   | 30  | 0,08         | 0,93       | 0,30                 | 0,13 | 01        | 38689            |
|                | 100       | 275   | 42  | 0,08         | 0,63       | 0,22                 | 0,10 | 02        | 38101            |
|                | 150       | 355   | 60  | 0,08         | 0,43       | 0,19                 | 0,09 | 03        | 38151            |

\* See also corresponding paragraph.

\*\* Measured after 5 min.



| $U_R$<br>V | nom. cap.<br>$\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85^\circ\text{C}$ (mA)* | max. d.c. leakage current at $U_R$ after 1 min<br>$\mu\text{A}$ | max. $\tan \delta$ * | typ. ESR*<br>$\Omega$ | impedance at 100 kHz<br>$\Omega$ |      | case size | catalogue number |
|------------|----------------------------|---|---|----------------------|-----------------------|----------------------------------|------|-----------|------------------|
|            |                            |   |   |                      |                       | max.                             | typ. |           |                  |
| 100        | 4,7                        | 40  | 5**   | 0,07                 | 8,5                   | 1,6                              | 0,8  | 5         | 2222 108 39478   |
|            | 6,8                        | 50  | 7**   | 0,07                 | 5,9                   | 1,6                              | 0,8  | 5         | 39688            |
|            | 10                         | 60  | 10  | 0,07                 | 4,0                   | 1,6                              | 0,8  | 5         | 39109            |
|            | 15                         | 80  | 13  | 0,07                 | 2,7                   | 0,84                             | 0,4  | 6         | 39159            |
|            | 22                         | 90  | 17  | 0,07                 | 1,8                   | 0,84                             | 0,4  | 6         | 39229            |
|            | 33                         | 105   | 24  | 0,15                 | 4,8                   | 1,9                              | 0,9  | 00        | 39339            |
|            | 47                         | 125   | 33  | 0,15                 | 3,4                   | 1,9                              | 0,9  | 00        | 39479            |
|            | 68                         | 165   | 45  | 0,15                 | 2,4                   | 1,6                              | 0,7  | 01        | 39689            |
|            | 100                        | 225   | 64  | 0,15                 | 1,6                   | 1,3                              | 0,5  | 02        | 39101            |
|            | 150                        | 300   | 94  | 0,15                 | 1,1                   | 0,9                              | 0,3  | 03        | 39151            |

**Capacitance**

Nominal capacitance at 100 Hz at  $T_{\text{amb}} = 20^\circ\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 2

-10 to +50%

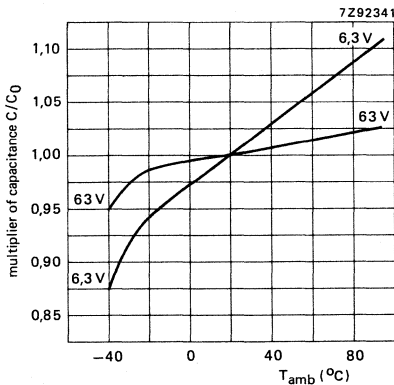


Fig. 3 Typical capacitance as a function of temperature,  $U_R = 6,3$  to  $63\text{ V}$ ;  $C_0$  = capacitance at  $20^\circ\text{C}$ , 100 Hz.

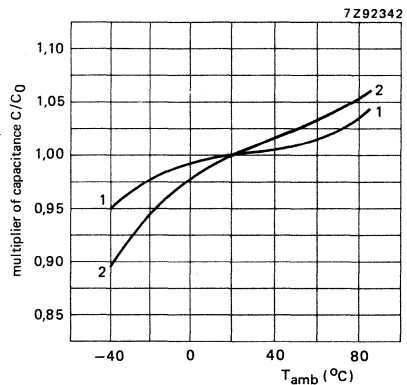


Fig. 4 Typical capacitance as a function of temperature,  $U_R = 100\text{ V}$ ;  $C_0$  = capacitance at  $20^\circ\text{C}$ , 100 Hz. curve 1 = case sizes 5 and 6; curve 2 = case sizes 00 to 03.

\* See also corresponding paragraph.

\*\* Measured after 5 min.

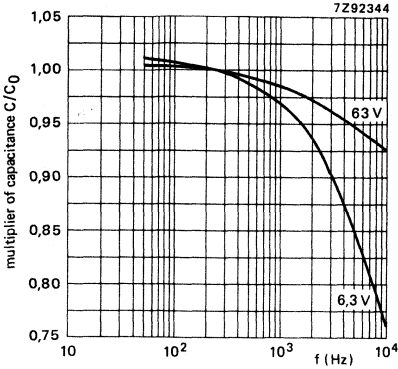


Fig. 5 Typical capacitance as a function of frequency,  $U_R = 6,3$  to  $63$  V;  $C_0$  = capacitance at  $20$  °C,  $100$  Hz.

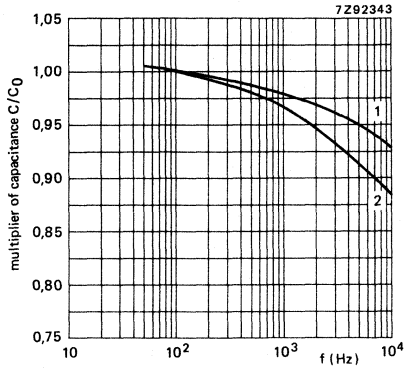


Fig. 6 Typical capacitance as a function of frequency,  $U_R = 100$  V;  $C_0$  = capacitance at  $20$  °C,  $100$  Hz. curve 1 = case sizes 5 and 6; curve 2 = case sizes 00 to 03.

**Voltage**

Max. permissible voltage

$1,1 \times U_R$

Ripple voltage \* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage, without d.c. voltage applied
- c) momentary value of applied voltage

$1,1 \times U_R$

$1$  V

between  $1,1 \times U_R$  and  $-1$  V

Surge voltage = max. permissible voltage for short periods (see also Tests and requirements in the Introduction)

$1,15 \times U_R$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at  $85$  °C

$1$  V

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at  $100$  Hz and

$T_{amb} = 85$  °C

$T_{amb} = 75$  °C

$T_{amb} \leq 65$  °C

see Table 2

$1,7 \times$  values of Table 2

$2,2 \times$  values of Table 2

\* Ripple voltages are not applicable if the max. permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Ripple currents are not applicable if the max. permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

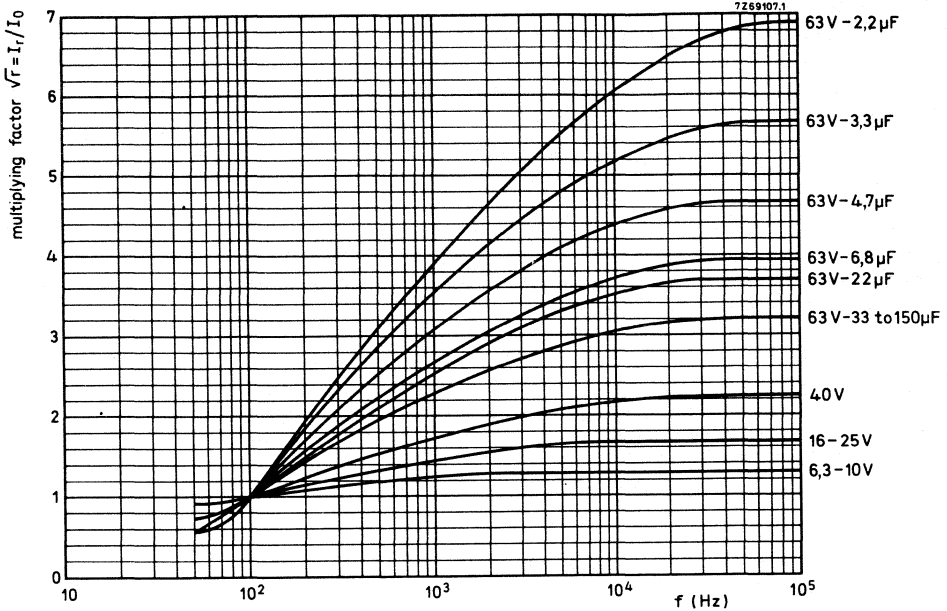


Fig. 7 Multiplying factor as a function of frequency,  $U_R = 6,3$  to 63 V;  $I_0$  = maximum ripple current at 85 °C, 100 Hz.

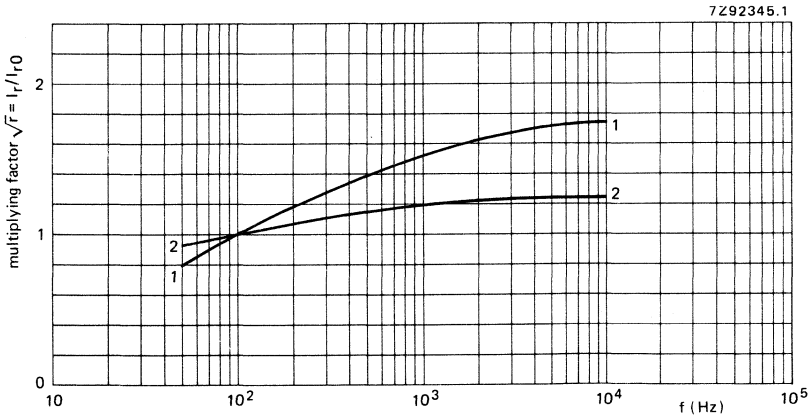


Fig. 8 Multiplying factor as a function of frequency,  $U_R = 100$  V;  $I_0$  = maximum ripple current at 85 °C, 100 Hz.

Curve 1 = case sizes 5 and 6;  
 Curve 2 = case sizes 00 to 03.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r^2 \text{ max}$$

$I_r \text{ max}$  = max. ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n}$  = multiplying factor at same frequency.

#### Note

These ripple currents are not applicable if the max. permissible ripple voltage is exceeded. In that case the ripple voltage is decisive (see Ripple voltage).

#### Charge and discharge current

The capacitors may be charged from a source with a source impedance of  $0 \Omega$ , and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

#### D.C. leakage current

Maximum d.c. leakage current 1 min\* after application  
of  $U_R$ , at  $T_{\text{amb}} = 20 \text{ }^\circ\text{C}$

see Table 2

D.C. leakage current during continuous operation at  $U_R$   
at  $20 \text{ }^\circ\text{C}$   
at  $85 \text{ }^\circ\text{C}$

approx. 0,2 x values stated in Table 2  
 $\leq$  values stated in Table 2

\* For capacitors  $< 10 \mu\text{F}$  the d.c. leakage current shall be measured 5 min after application of  $U_R$ .

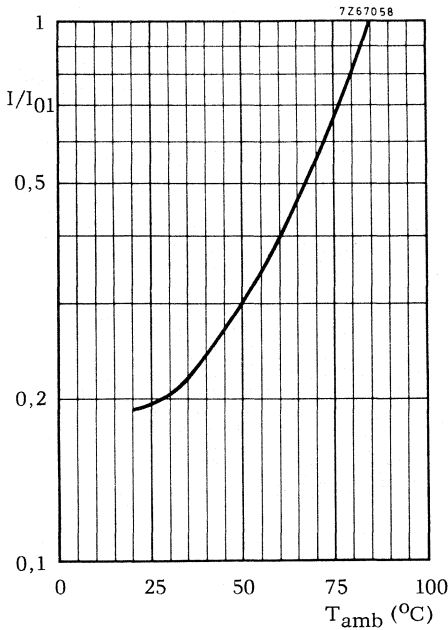


Fig. 9 Multiplier  $I/I_{01}$  as a function of temperature.  $I_{01}$  = d.c. leakage current during continuous operation at  $T_{amb} = 85\text{ }^{\circ}\text{C}$  at  $U_R$ .

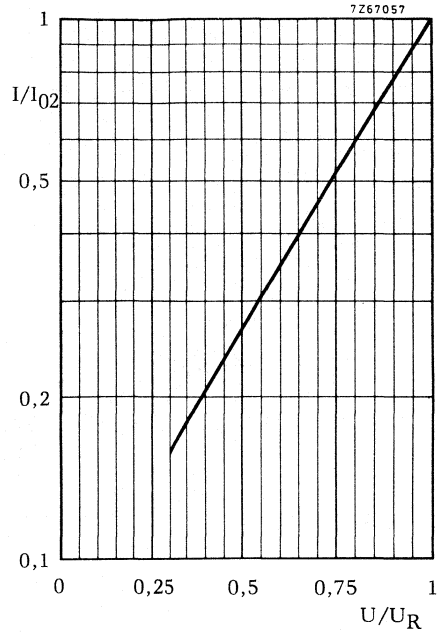


Fig. 10 Multiplier  $I/I_{02}$  as a function of  $U/U_R$ .  $I_{02}$  = d.c. leakage current at  $U_R$  at a discrete constant temperature within category temperature range.

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^{\circ}\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

**Equivalent series resistance (ESR =  $\tan \delta / \omega C$ )**

Typical ESR at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

**Impedance**

Impedance at 100 kHz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

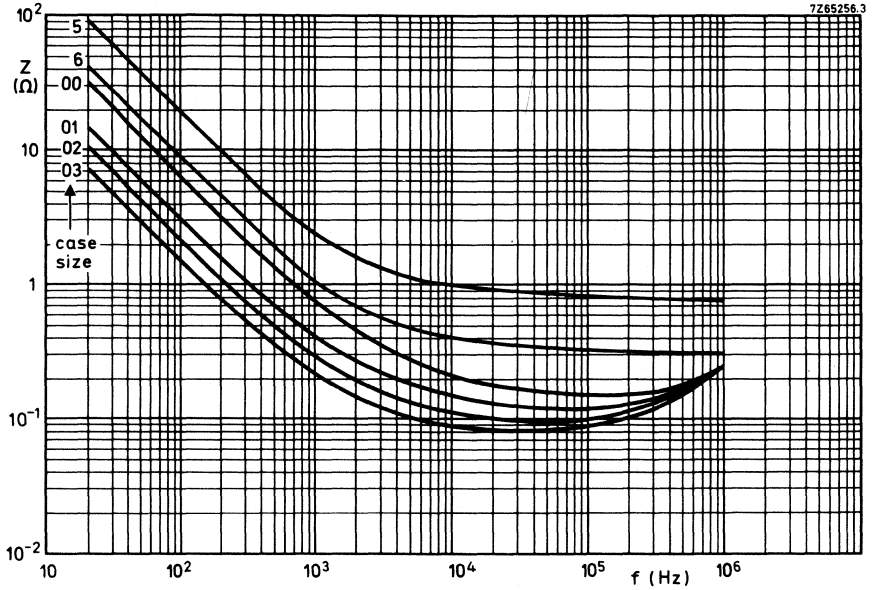


Fig. 11 Typical impedance as a function of frequency at  $20\text{ }^{\circ}\text{C}$ ,  $U_R = 16\text{ V}$ .

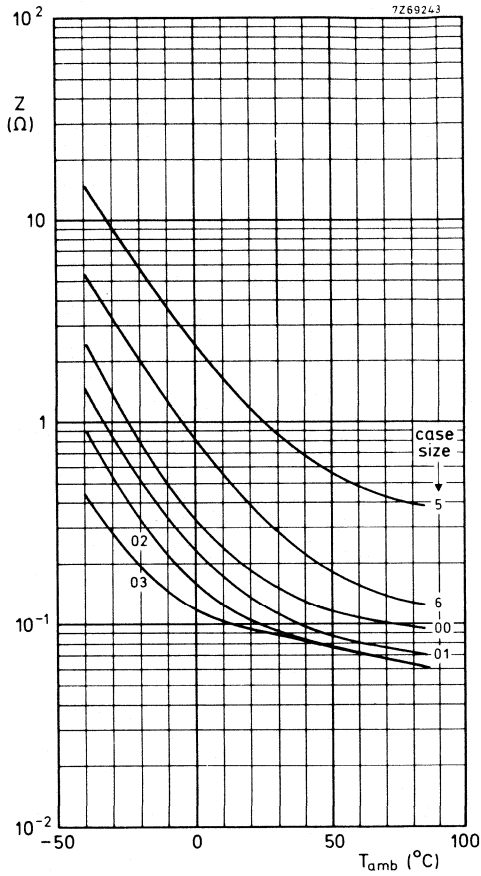


Fig. 12 Typical impedance as a function of temperature at 100 kHz,  $U_R = 6,3$  to 63 V.

**Equivalent series inductance (ESL)**

|                      |            |
|----------------------|------------|
| Case size 5          | typ. 40 nH |
| Case size 6          | typ. 50 nH |
| Case sizes 00 and 01 | typ. 50 nH |
| Case size 02         | typ. 55 nH |
| Case size 03         | typ. 60 nH |

**OPERATIONAL DATA**

**Category temperature range**

for rated voltage

-40 to +85 °C

**Typical lifetime**

at +40 °C

at +85 °C

at +105 °C

case sizes 5 and 6

case sizes 00 to 03

> 120 000 h

> 200 000 h

> 6 000 h

> 10 000 h

> 1 200 h

> 2 000 h\*

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$

500 h

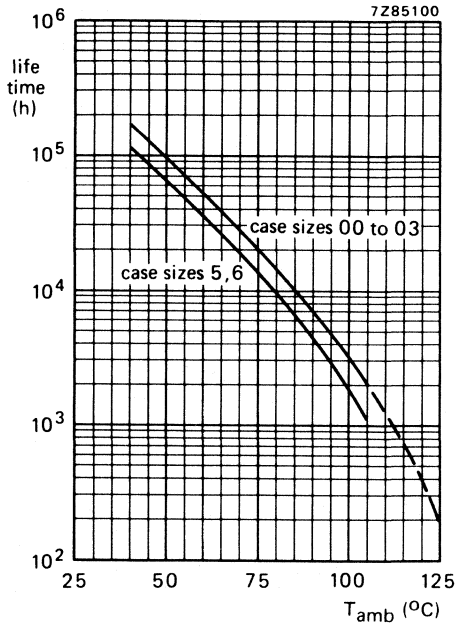


Fig. 13 Typical lifetime as a function of temperature.

\* Not applicable to 100 V range.



**PACKING**

Capacitors with case sizes 00 to 03 are supplied in boxes of 200. Capacitors with case sizes 5 and 6 are supplied on bandoliers in boxes of 500.

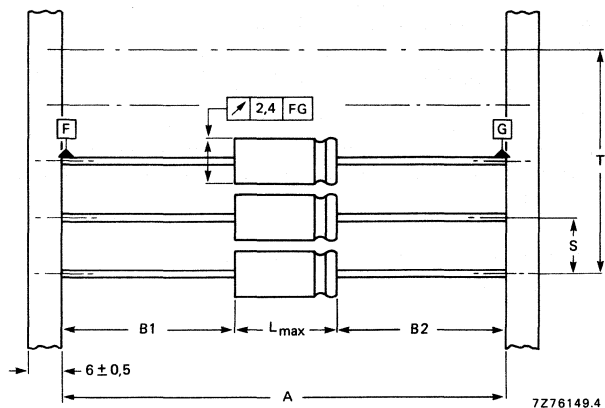


Fig. 14 Capacitors (case size 5 or 6) on bandoliers: the bandolier to which the negative capacitor terminals are connected is blue. See Table 3 for simendions A, S, T and L.

$|B1 - B2| = \text{max. } 1,4 \text{ mm.}$

**Table 3**

Dimensions in mm

| case size | A        | S         | T for number (n) of capacitors |              | L <sub>max</sub> |
|-----------|----------|-----------|--------------------------------|--------------|------------------|
|           |          |           | n < 50                         | 50 < n < 100 |                  |
| 5         | 73 ± 1,6 | 10 ± 0,4  | 10 (n-1) ± 2                   | 10 (n-1) ± 4 | 18,5             |
| 6         | 73 ± 1,6 | 15 ± 0,75 | 15 (n-1) ± 2                   | 15 (n-1) ± 4 | 18,5             |

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors, with the exception of IEC 384-4 sub clause 9. 14, for which the following is valid.

IEC 384-4 sub clause 9. 14.

IEC 68-2 test method: no reference.

Name of test: Endurance.

Procedure: 5000 h at 85 °C, rated voltage and ripple current applied.

Requirements: No visible damage, no leakage of electrolyte, insulation resistance  $> 100 \text{ M}\Omega$ , no breakdown or flashover, d.c. leakage current  $\leq$  stated limit,  $\tan \delta \leq 1,3 \times$  stated limit, impedance at 100 kHz  $\leq 2 \times$  stated limit,  $\Delta C/C \leq 15\%$ .


After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

Note:

Capacitors 2222 108 are miniature and small types, long-life grade.

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with screw terminals
- Long life
- Industrial applications



### QUICK REFERENCE DATA

|  |  |
|--|--|
| Nominal capacitance range (E6 series)    | 150 to 220 000 $\mu\text{F}$                         |
| Tolerance on nominal capacitance         | -10 to +30%  |
| Rated voltage range, $U_R$               | 10 to 385 V  |
| Category temperature range               | -40 to +85 $^{\circ}\text{C}$                        |
| Endurance test at 85 $^{\circ}\text{C}$  | 5000 h   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ | 500 h  |
| Basic specifications                     | IEC 384-4, long-life grade<br>DIN 41240<br>DIN 41248 |
| Detail specification                     |  |
| Climatic category                        |  |
| IEC 68                                   | 40/085/56  |
| DIN 40040                                | GPF (56 days)  |
| NF C93-001                               | 554  |

Selection chart for  $C_{\text{nom}}$ - $U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |     |     |     |     |     |     |     |     |
|-----------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|-----|
|                                   | 10        | 16  | 25  | 40  | 63  | 100 | 250 | 350 | 385 |
| 150                               |           |     |     |     |     |     |     |     | 10  |
| 220                               |           |     |     |     |     |     |     |     | 11  |
| 330                               |           |     |     |     |     |     | 10  |     | 12a |
| 470                               |           |     |     |     |     |     | 11  |     | 14  |
| 680                               |           |     |     |     |     |     | 12a | 14  | 15a |
| 1 000                             |           |     |     |     |     | 10  | 14  | 15a | 16a |
| 1 500                             |           |     |     |     |     | 10  | 15a |     | 16a |
| 2 200                             |           |     |     |     | 10  | 11  | 16a |     | 17  |
| 3 300                             |           |     |     | 10  | 10  | 12a | 16a |     |     |
| 4 700                             |           |     | 10  | 10  | 11  | 14  | 17  |     |     |
| 6 800                             |           |     | 10  | 11  | 12a | 15a |     |     |     |
| 10 000                            |           | 10  | 11  | 12a | 14  | 16a |     |     |     |
| 15 000                            | 10        | 11  | 12a | 14  | 15a | 16a |     |     |     |
| 22 000                            | 11        | 12a | 14  | 15a | 16a | 17  |     |     |     |
| 33 000                            | 12a       | 14  | 15a | 16a | 16a |     |     |     |     |
| 47 000                            | 14        | 15a | 16a | 16a | 17  |     |     |     |     |
| 68 000                            | 15a       | 16a | 16a | 17  |     |     |     |     |     |
| 100 000                           | 16a       | 16a | 17  |     |     |     |     |     |     |
| 150 000                           | 16a       | 17  |     |     |     |     |     |     |     |
| 220 000                           | 17        |     |     |     |     |     |     |     |     |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 10        | $\varnothing$ 35 x 60   |
| 11        | $\varnothing$ 35 x 80   |
| 12a       | $\varnothing$ 35 x 105  |
| 14        | $\varnothing$ 50 x 80   |
| 15a       | $\varnothing$ 50 x 105  |
| 16a       | $\varnothing$ 65 x 105  |
| 17        | $\varnothing$ 75 x 105  |

2222 114  
2222 115

**APPLICATION**

These capacitors have extremely low impedance and inductance values and high resistance to shock and vibration which render them very suitable for applications such as:

- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.

**DESCRIPTION**

The low impedance and inductance are achieved by a special construction with multiple internal anode and cathode connections. The high resistance to shock and vibration is achieved by the longitudinal rills and special internal construction. The capacitors are completely cold-welded and there are no limitations on charge/discharge rate (see paragraph "Charge and discharge current"). The aluminium cases are fully insulated and sealed by a synthetic disc with a vent. The capacitors are delivered with screws and washers.

**MECHANICAL DATA**

Dimensions in mm

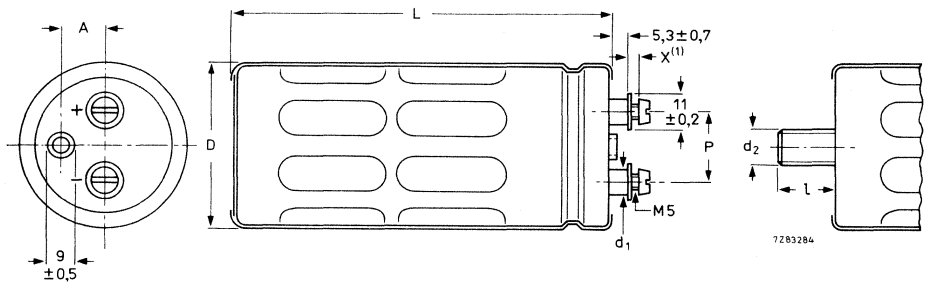


Fig. 1 See Table 1 for dimensions  $D$ ,  $L$ ,  $P$ ,  $A$ ,  $d_1$ ,  $d_2$ , and  $l$ .

(1) Maximum permissible torque which may be applied to the termination screws at various heights (dimension  $x$  in drawing):

| $x$ | max. permissible torque (Nm) |
|-----|------------------------------|
| 2   | 1,5                          |
| 4   | 1                            |
| 6   | 0,5                          |

Table 1

| case size | D  |       | L    |      | P    |          | A    |   | d <sub>1</sub> | d <sub>2</sub> x l |
|-----------|----|-------|------|------|------|----------|------|---|----------------|--------------------|
| 10        | 35 | + 1,5 | 60   | + 3  | 13,0 | ± 0,1    | 8,4  | 8 | ± 0,2          | M8 x 12            |
| 11        | 35 |       | 80   |      | 13,0 |          | 8,4  | 8 |                | M8 x 12            |
| 12a       | 35 |       | 105  |      | 13,0 |          | 8,4  | 8 |                | M8 x 12            |
| 14        | 50 |       | 80   |      | 22,0 |          | 14,3 | 8 |                | M12 x 16           |
| 15a       | 50 |       | 105  |      | 22,0 |          | 14,3 | 8 |                | M12 x 16           |
| 16a       | 65 | 105   | 28,5 | 19,0 | 11   | M12 x 16 |      |   |                |                    |
| 17        | 75 | 105   | 32,0 | 21,0 | 11   | M12 x 16 |      |   |                |                    |

**Marking**

The capacitors are marked with: nominal capacitance, tolerance on nominal capacitance, rated voltage, temperature range, IEC grade, maximum r.m.s. ripple current at 70 °C and 20 kHz, catalogue number, date code (year/week), name of manufacturer.

**Mounting**

The capacitor may be mounted vertically or horizontally, with or without mounting clamp. For proper functioning the vent should be on the upper side, whether the capacitor is mounted horizontally or vertically. When a number of capacitors are connected in a bank, they must not be closer together than 15 mm when no derating of ripple current and/or temperature is applied. See also Mounting Accessories, at the end of this data sheet.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 2

| U <sub>R</sub> | nom. cap.<br>V | max. r.m.s.* ripple current (A)       |                                       | max.d.c.leakage current at U <sub>R</sub> after 1 min<br>mA | typ.* ESR<br>mΩ | max. tan δ* | impedance at 20 kHz* |      | case size | catalogue number** |
|----------------|----------------|---------------------------------------|---------------------------------------|---|-----------------|-------------|----------------------|------|-----------|--------------------|
|                |                | at T <sub>amb</sub> = 85 °C<br>100 Hz | at T <sub>amb</sub> = 70 °C<br>20 kHz |   |                 |             | mΩ                   |      |           |                    |
|                |                |                                       |                                       |   |                 |             | typ.                 | max. |           |                    |
| 10             | 15 000         | 6                                     | 11,4                                  | 0,90  | 20              | 0,32        | 13                   | 20   | 10        | 2222 114 14153     |
|                | 22 000         | 7,5                                   | 14,2                                  | 1,32  | 14              | 0,33        | 9,5                  | 14   | 11        | 14223              |
|                | 33 000         | 10                                    | 19                                    | 1,98  | 10              | 0,35        | 7,5                  | 10   | 12a       | 14333              |
|                | 47 000         | 14                                    | 26,5                                  | 2,82  | 7,5             | 0,36        | 5,0                  | 9,5  | 14        | 14473              |
|                | 68 000         | 18                                    | 34                                    | 4,08  | 5,5             | 0,38        | 4,0                  | 8,0  | 15a       | 14683              |
|                | 100 000        | 30                                    | 50                                    | 6,00  | 3,5             | 0,34        | 3,0                  | 5,0  | 16a       | 14104              |
|                | 150 000        | 30                                    | 50                                    | 9,00  | 3,0             | 0,45        | 3,0                  | 5,0  | 16a       | 14154              |
|                | 220 000        | 37                                    | 50                                    | 13,20   | 2,0             | 0,45        | 2,5                  | 4,0  | 17        | 14224              |
| 16             | 10 000         | 6                                     | 11,4                                  | 0,96  | 22              | 0,22        | 13                   | 20   | 10        | 15103              |
|                | 15 000         | 7,5                                   | 14,2                                  | 1,44  | 15              | 0,23        | 9,5                  | 14   | 11        | 15153              |
|                | 22 000         | 10                                    | 19                                    | 2,12  | 11              | 0,25        | 7,0                  | 10   | 12a       | 15223              |
|                | 33 000         | 13                                    | 24,6                                  | 3,17  | 7,5             | 0,26        | 5,0                  | 9,5  | 14        | 15333              |
|                | 47 000         | 18                                    | 34                                    | 4,52  | 5,5             | 0,27        | 4,0                  | 8,0  | 15a       | 15473              |
|                | 68 000         | 28                                    | 50                                    | 6,53  | 3,5             | 0,24        | 3,0                  | 5,0  | 16a       | 15683              |
|                | 100 000        | 28                                    | 50                                    | 9,60  | 3,0             | 0,31        | 3,0                  | 5,0  | 16a       | 15104              |
|                | 150 000        | 37                                    | 50                                    | 14,40   | 2,0             | 0,31        | 2,5                  | 4,0  | 17        | 15154              |
| 25             | 4 700          | 5,2                                   | 10                                    | 0,71  | 30              | 0,14        | 15                   | 23   | 10        | 16472              |
|                | 6 800          | 5,2                                   | 10                                    | 1,02  | 25              | 0,18        | 14                   | 21   | 10        | 16682              |
|                | 10 000         | 6,7                                   | 12,7                                  | 1,50  | 18              | 0,18        | 10                   | 15   | 11        | 16103              |
|                | 15 000         | 9,7                                   | 18,4                                  | 2,25  | 12              | 0,19        | 7,5                  | 11   | 12a       | 16153              |
|                | 22 000         | 12,5                                  | 23,7                                  | 3,30  | 8,5             | 0,19        | 5,5                  | 9,5  | 14        | 16223              |
|                | 33 000         | 18                                    | 34                                    | 4,95  | 6,0             | 0,21        | 4,0                  | 8,0  | 15a       | 16333              |
|                | 47 000         | 27                                    | 50                                    | 7,05  | 4,0             | 0,18        | 3,0                  | 5,0  | 16a       | 16473              |
|                | 68 000         | 27                                    | 50                                    | 10,20   | 3,5             | 0,23        | 3,0                  | 5,0  | 16a       | 16683              |
| 100 000        | 37             | 50                                    | 15,00                                 | 2,5   | 0,23            | 2,5         | 4,0                  | 17   | 16104     |                    |
| 40             | 3 300          | 4,5                                   | 8,5                                   | 0,80  | 37              | 0,13        | 21                   | 32   | 10        | 17332              |
|                | 4 700          | 4,5                                   | 8,5                                   | 1,13  | 35              | 0,17        | 22                   | 33   | 10        | 17472              |
|                | 6 800          | 6                                     | 11,4                                  | 1,64  | 25              | 0,17        | 15                   | 23   | 11        | 17682              |
|                | 10 000         | 7,5                                   | 14,2                                  | 2,40  | 17              | 0,18        | 11                   | 17   | 12a       | 17103              |
|                | 15 000         | 10                                    | 19                                    | 3,60  | 11              | 0,17        | 7,5                  | 13   | 14        | 17153              |
|                | 22 000         | 15                                    | 28,5                                  | 5,28  | 8,0             | 0,18        | 5,5                  | 10,5 | 15a       | 17223              |
|                | 33 000         | 21                                    | 40                                    | 7,92  | 5,0             | 0,16        | 3,5                  | 6,0  | 16a       | 17333              |
|                | 47 000         | 22                                    | 42                                    | 11,28   | 4,5             | 0,21        | 3,5                  | 6,0  | 16a       | 17473              |
| 68 000         | 30             | 50                                    | 16,32                                 | 3,0   | 0,21            | 3,0         | 4,5                  | 17   | 17683     |                    |

\* See also corresponding paragraph.

\*\* Replace 8th digit by 5 for bolt version.

| U <sub>R</sub> | nom. cap. | max. r.m.s.* ripple current (A) |                             | max.d.c.leakage current at U <sub>R</sub> after 1 min | typ.* ESR | max. tan δ* | impedance at 20 kHz* |      | case size | catalogue number** |
|----------------|-----------|---------------------------------|-----------------------------|---|-----------|-------------|----------------------|------|-----------|--------------------|
|                |           | at T <sub>amb</sub> = 85 °C     | at T <sub>amb</sub> = 70 °C |   |           |             | mΩ                   |      |           |                    |
|                |           | V                               | μF                          | 100 Hz  | 20 kHz    | mA          | mΩ                   | typ. | max.      |                    |
| 63             | 2 200     | 3,7                             | 7                           | 0,84  | 39        | 0,09        | 22                   | 33   | 10        | 2222 114 18222     |
|                | 3 300     | 3,7                             | 7                           | 1,25  | 32        | 0,11        | 20                   | 30   | 10        |                    |
|                | 4 700     | 5,2                             | 10                          | 1,78  | 23        | 0,11        | 14                   | 21   | 11        |                    |
|                | 6 800     | 7,5                             | 14,2                        | 2,57  | 17        | 0,11        | 10                   | 15   | 12a       |                    |
|                | 10 000    | 9,5                             | 18                          | 3,78  | 12        | 0,12        | 7,5                  | 14   | 14        |                    |
|                | 15 000    | 13,5                            | 25,6                        | 5,67  | 8,5       | 0,13        | 5,5                  | 10,5 | 15a       |                    |
|                | 22 000    | 21                              | 40                          | 8,32  | 5,0       | 0,11        | 3,5                  | 6,0  | 16a       |                    |
|                | 33 000    | 22                              | 42                          | 12,48   | 4,5       | 0,14        | 3,5                  | 6,0  | 16a       |                    |
|                | 47 000    | 30                              | 50                          | 17,77   | 3,0       | 0,14        | 3,0                  | 4,5  | 17        |                    |
|                | 100       | 1 000                           | 2,2                         | 4,2   | 0,60      | 220         | 0,22                 | 160  | 240       |                    |
| 1 500          |           | 2,2                             | 4,2                         | 0,90  | 220       | 0,33        | 160                  | 240  | 10        |                    |
| 2 200          |           | 3,3                             | 6,3                         | 1,32  | 150       | 0,33        | 110                  | 165  | 11        |                    |
| 3 300          |           | 4,5                             | 8,5                         | 1,98  | 100       | 0,33        | 75                   | 115  | 12a       |                    |
| 4 700          |           | 5,7                             | 10,8                        | 2,82  | 70        | 0,33        | 55                   | 85   | 14        |                    |
| 6 800          |           | 8,0                             | 15,2                        | 4,08  | 50        | 0,33        | 35                   | 55   | 15a       |                    |
| 10 000         |           | 13,5                            | 25,6                        | 6,00  | 22        | 0,22        | 16                   | 25   | 16a       |                    |
| 15 000         |           | 13,5                            | 25,6                        | 9,00  | 22        | 0,33        | 16                   | 25   | 16a       |                    |
| 22 000         |           | 15,0                            | 28,5                        | 13,20   | 15        | 0,33        | 11                   | 17   | 17        |                    |
| 250            |           | 330                             | 1,8                         | 3,4   | 0,50      | 300         | 0,15                 | 275  | 500       | 10                 |
|                | 470       | 2,5                             | 4,7                         | 0,71  | 250       | 0,15        | 140                  | 375  | 11        |                    |
|                | 680       | 3,5                             | 6,6                         | 1,02  | 180       | 0,15        | 125                  | 300  | 12a       |                    |
|                | 1 000     | 4,2                             | 8                           | 1,50  | 110       | 0,15        | 60                   | 130  | 14        |                    |
|                | 1 500     | 6,3                             | 12                          | 2,25  | 60        | 0,15        | 40                   | 100  | 15a       |                    |
|                | 2 200     | 8,8                             | 16,7                        | 3,30  | 45        | 0,15        | 30                   | 60   | 16a       |                    |
|                | 3 300     | 10,5                            | 20                          | 4,95  | 30        | 0,15        | 25                   | 50   | 16a       |                    |
|                | 4 700     | 14                              | 26,5                        | 7,05  | 25        | 0,15        | 20                   | 40   | 17        |                    |
| 350            | 680       | 2,7                             | 5,1                         | 1,47  | 140       | 0,10        | 60                   | 130  | 14        | 2222 115 15681     |
|                | 1 000     | 4,8                             | 9,1                         | 2,14  | 65        | 0,10        | 50                   | 100  | 15a       |                    |
| 385            | 150       | 1,2                             | 2,3                         | 0,34  | 425       | 0,10        | 250                  | 500  | 10        | 2222 115 18151     |
|                | 220       | 1,6                             | 3                           | 0,50  | 275       | 0,10        | 200                  | 380  | 11        |                    |
|                | 330       | 2,2                             | 4,2                         | 0,75  | 175       | 0,10        | 140                  | 300  | 12a       |                    |
|                | 470       | 2,7                             | 5,1                         | 1,06  | 110       | 0,10        | 75                   | 130  | 14        |                    |
|                | 680       | 4,8                             | 9,1                         | 1,53  | 90        | 0,10        | 60                   | 130  | 15a       |                    |
|                | 1 000     | 7                               | 13,3                        | 2,25  | 70        | 0,10        | 45                   | 60   | 16a       |                    |
|                | 1 500     | 7                               | 13,3                        | 3,38  | 45        | 0,10        | 30                   | 50   | 16a       |                    |
|                | 2 200     | 9                               | 17                          | 4,95  | 35        | 0,10        | 20                   | 45   | 17        |                    |

\* See also corresponding paragraph.

\*\* Replace 8th digit by 5 for bolt version.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$   
Tolerance on nominal capacitance at 100 Hz

see Table 2  
-10 to +30%

**Voltage**



- Rated voltage = max. permissible voltage
- Ripple voltage = max. permissible a.c. voltage providing the following three conditions are met:
  - (a) max. positive voltage on anode (d.c. + peak a.c.)
  - (b) max. positive voltage on cathode (reverse voltage)
  - (c) max. ripple current is not exceeded
- Surge voltage = max. permissible voltage for short periods (see also "Tests and requirements")
  - $U_R = 10$  to  $100\text{ V}$
  - $U_R = 250\text{ V}$
  - $U_R = 350\text{ V}$  and  $385\text{ V}$
- Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature (for short periods)

| core temperature* |                   |
|-------------------|-------------------|
| < 60 °C           | 60 to 95 °C       |
| $1,1 \times U_R$  | $U_R$             |
| $1,1 \times U_R$  | $U_R$             |
|                   |                   |
| 1 V               | 1 V               |
|                   |                   |
| $1,25 \times U_R$ | $1,15 \times U_R$ |
|                   |                   |
| $1,15 \times U_R$ | $1,1 \times U_R$  |
|                   |                   |
| 1 V               | 1 V               |

\* See Introduction, section 5, "Ripple current".



**Ripple current**

Maximum permissible r.m.s. ripple current

at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$ at 20 kHz and  $T_{amb} = 70\text{ }^{\circ}\text{C}$ 

at other frequencies and temperatures

see Table 2

see Table 2

see Tables 3 and 4\*

Table 3

| ambient temperature<br>$^{\circ}\text{C}$ | multiplier of<br>max. ripple current |
|---|--------------------------------------|
| 85  | 1,00                                 |
| 80  | 1,22                                 |
| 75  | 1,41                                 |
| 70  | 1,58                                 |
| 65  | 1,73                                 |
| 60  | 1,87                                 |
| 55  | 2,00                                 |
| 50  | 2,12                                 |
| 45  | 2,24                                 |
| $\leq 40$                                 | 2,35                                 |

Table 4

| frequency<br>Hz | multiplier of max.<br>ripple current ( $\sqrt{r}$ ) |
|-----------------|---|
| 50              | 0,83  |
| 100             | 1,00  |
| 200             | 1,10  |
| 400             | 1,15  |
| 1000            | 1,19  |
| $\geq 2000$     | 1,20  |

\*With an absolute maximum of 50 A.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

$I_{r \max}$  = max. ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n}$  = multiplying factor at same frequency (Table 4)

**Note**

Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application  
of the rated voltage at  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

D.C. leakage current after 15 min at  $U_R$ ,

at  $T_{amb} = 20\text{ }^{\circ}\text{C}$

0,125 x value stated in Table 2

at  $T_{amb} = 85\text{ }^{\circ}\text{C}$

0,625 x value stated in Table 2

If owing to prolonged storage and/or storage at an excessive temperature the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

**Equivalent series resistance (ESR)**

Typical ESR at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$

see Table 2

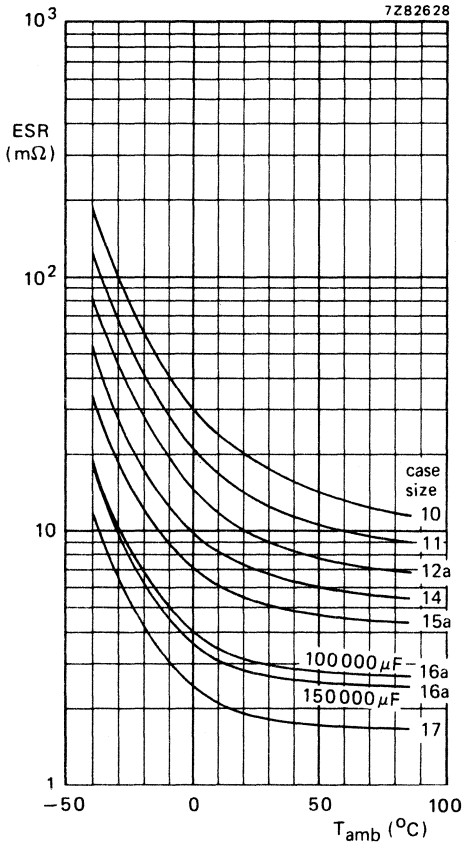


Fig. 2 Typical ESR as a function of temperature at 100 Hz,  $U_R = 10\text{ V}$ .

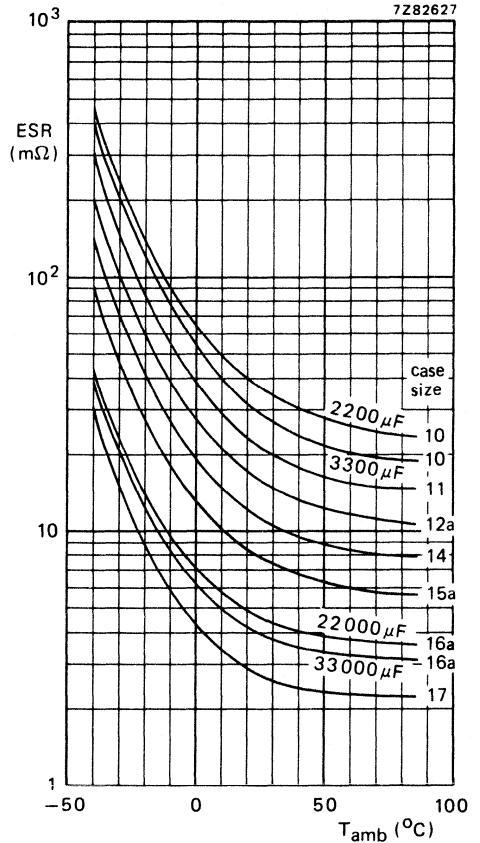


Fig. 3 Typical ESR as a function of temperature at 100 Hz,  $U_R = 63\text{ V}$ .

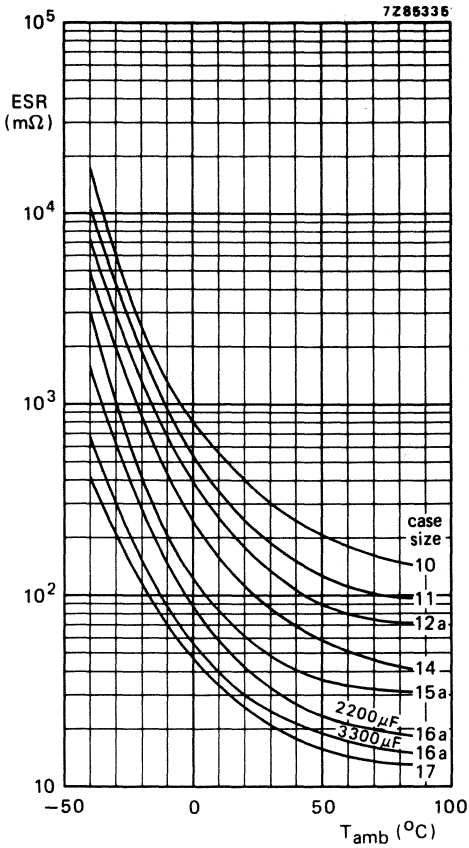


Fig. 4 Typical ESR as a function of temperature at 100 Hz,  $U_R = 250$  V.

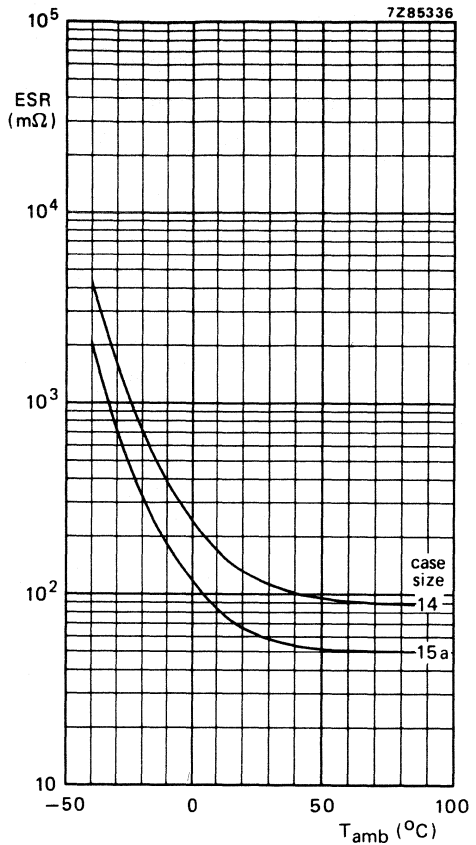


Fig. 5 Typical ESR as a function of temperature at 100 Hz,  $U_R = 350$  V.

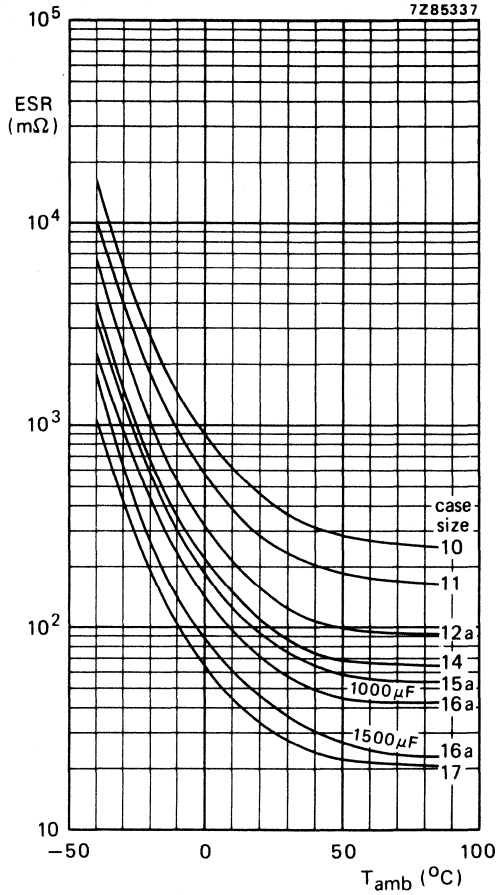


Fig. 6 Typical ESR as a function of temperature at 100 Hz,  $U_R = 385$  V.

**Impedance**

Impedance at 20 kHz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

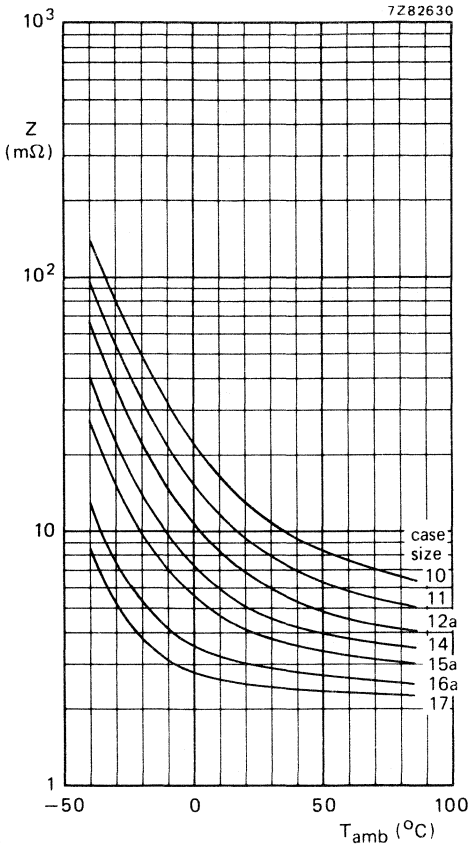


Fig. 7 Typical impedance as a function of temperature at 20 kHz,  $U_R = 10\text{ V}$ .

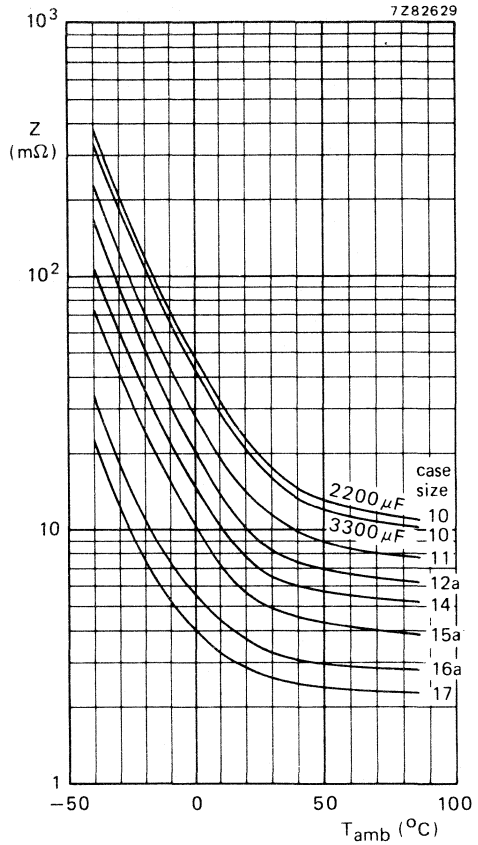


Fig. 8 Typical impedance as a function of temperature at 20 kHz,  $U_R = 63\text{ V}$ .

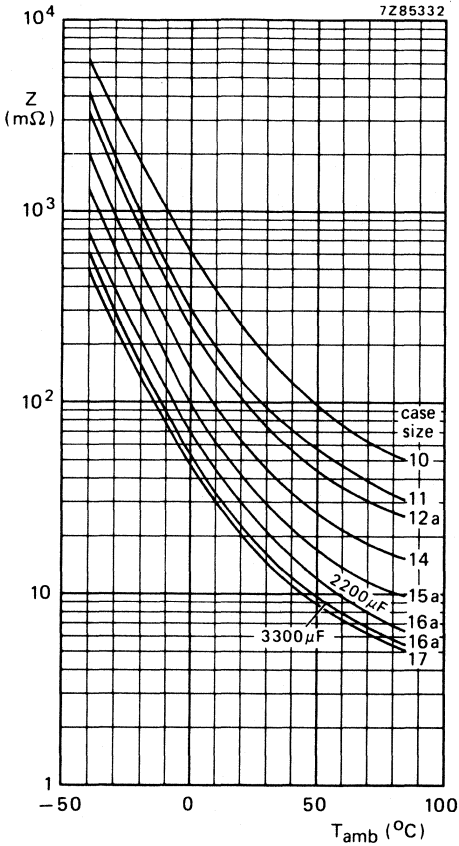


Fig. 9 Typical impedance as a function of temperature at 20 kHz,  $U_R = 250$  V.

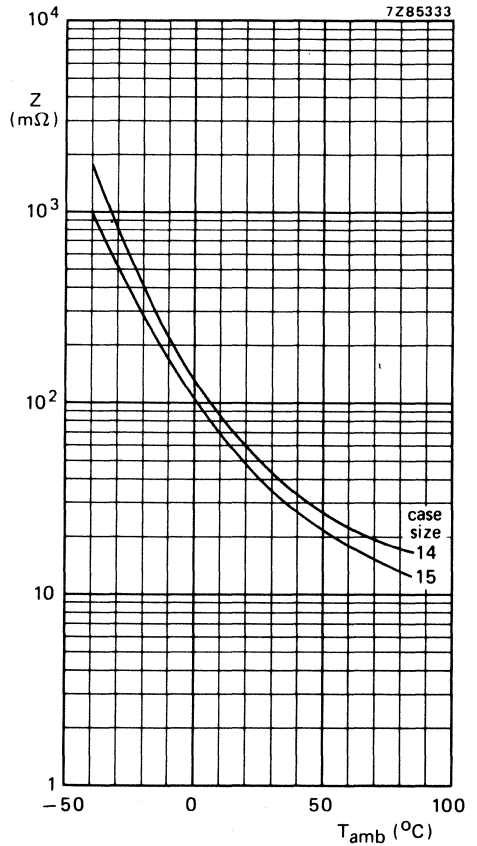


Fig. 10 Typical impedance as a function of temperature at 20 kHz,  $U_R = 350$  V.

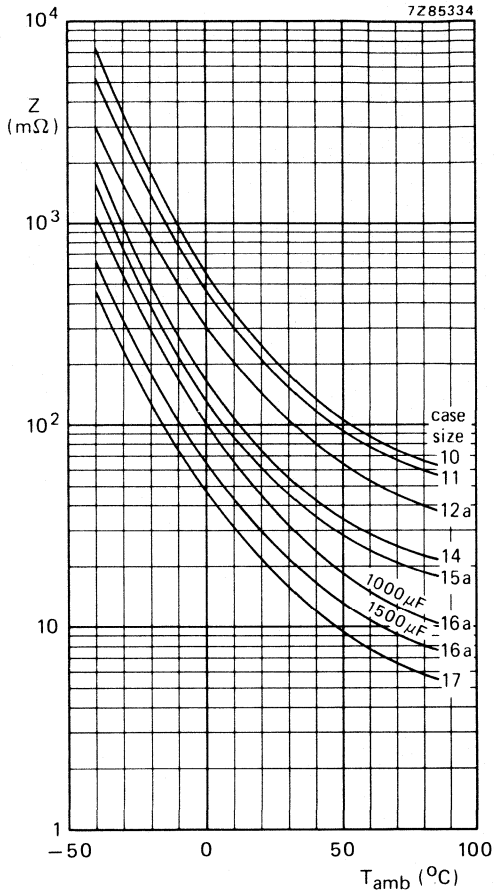


Fig. 11 Typical impedance as a function of temperature at 20 kHz,  $U_R = 385$  V.

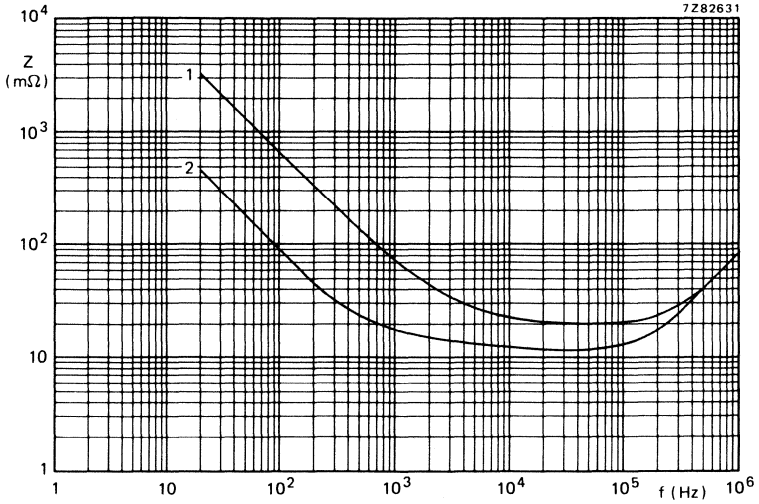


Fig. 12 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 10:  
curve 1 = 2200  $\mu\text{F}$ , 63 V; curve 2 = 15 000  $\mu\text{F}$ , 10 V.

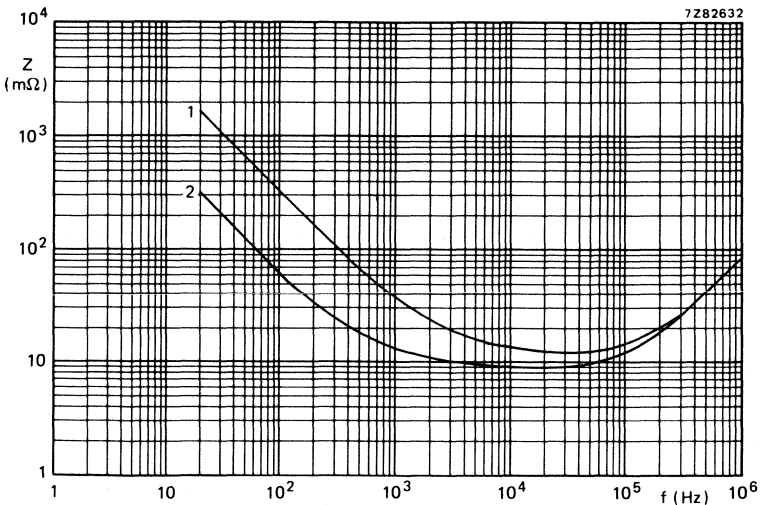


Fig. 13 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 11:  
curve 1 = 4700  $\mu\text{F}$ , 63 V; curve 2 = 22 000  $\mu\text{F}$ , 10 V.



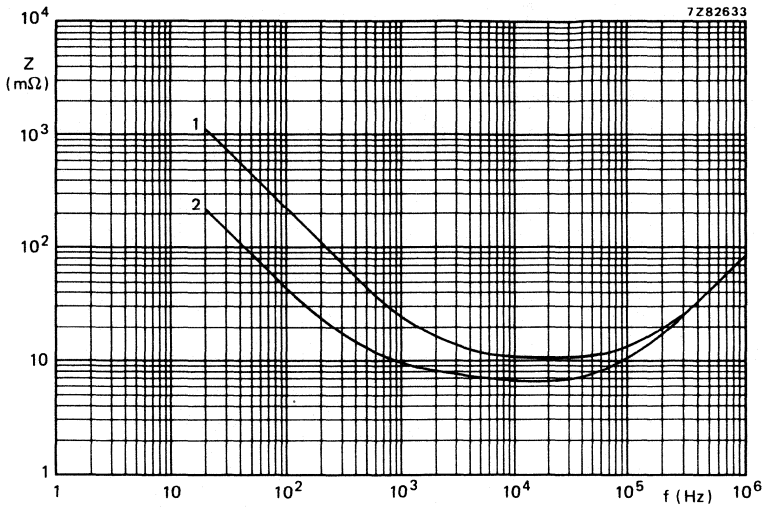


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 12a:  
curve 1 = 6800  $\mu\text{F}$ , 63 V; curve 2 = 33 000  $\mu\text{F}$ , 10 V.

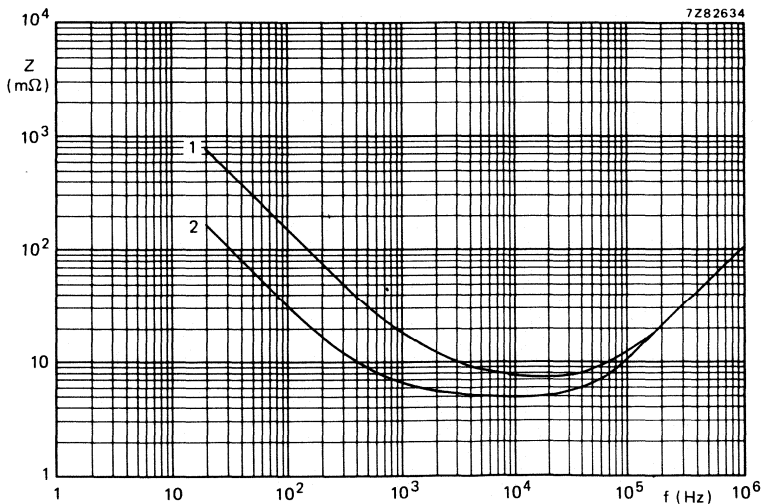


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 14:  
curve 1 = 10 000  $\mu\text{F}$ , 63 V; curve 2 = 47 000  $\mu\text{F}$ , 10 V.

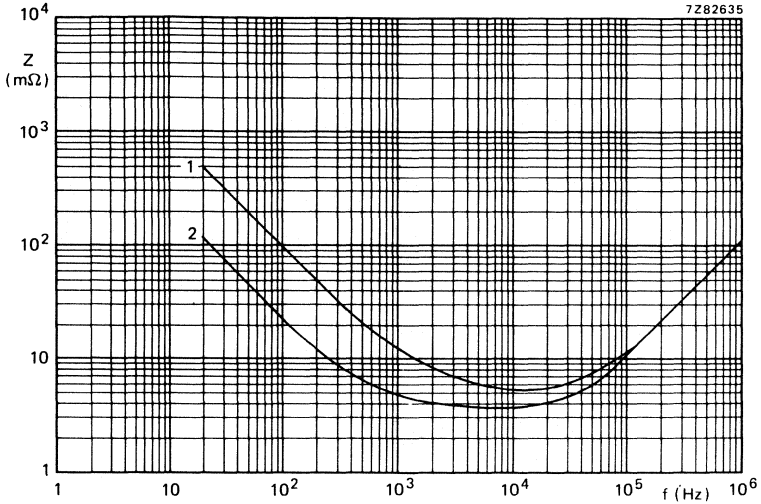


Fig. 16 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 15a:  
curve 1 = 15 000  $\mu\text{F}$ , 63 V; curve 2 = 68 000  $\mu\text{F}$ , 10 V.

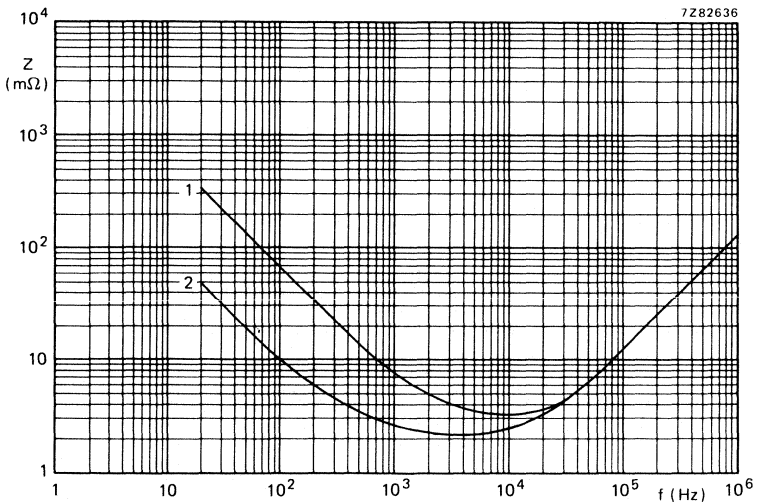


Fig. 17 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 16a:  
curve 1 = 22 000  $\mu\text{F}$ , 63 V; curve 2 = 150 000  $\mu\text{F}$ , 10 V.

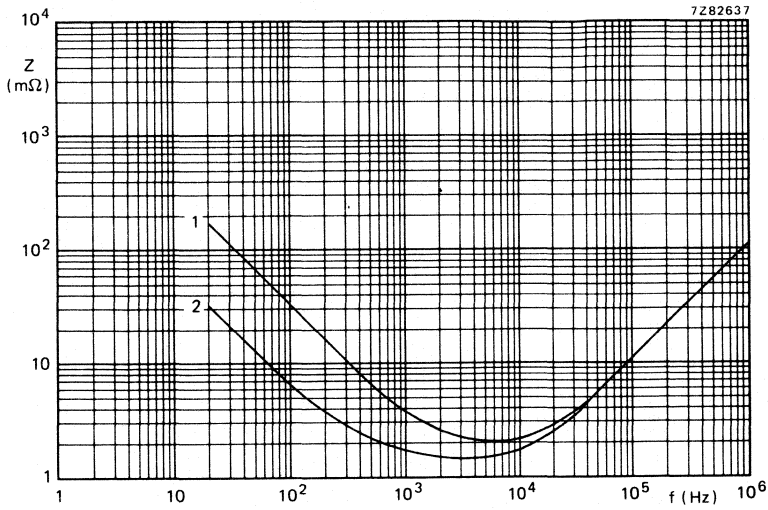


Fig. 18 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}C$ ; case size 17:  
curve 1 = 47 000  $\mu F$ , 63 V;  
curve 2 = 220 000  $\mu F$ , 10 V.

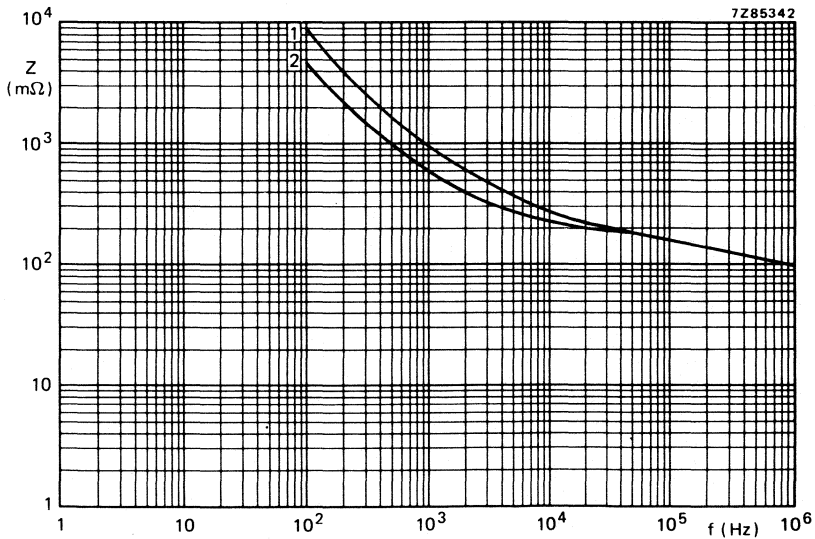


Fig. 19 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}C$ ; case size 10:  
curve 1 = 150  $\mu F$ , 385 V;  
curve 2 = 330  $\mu F$ , 250 V.

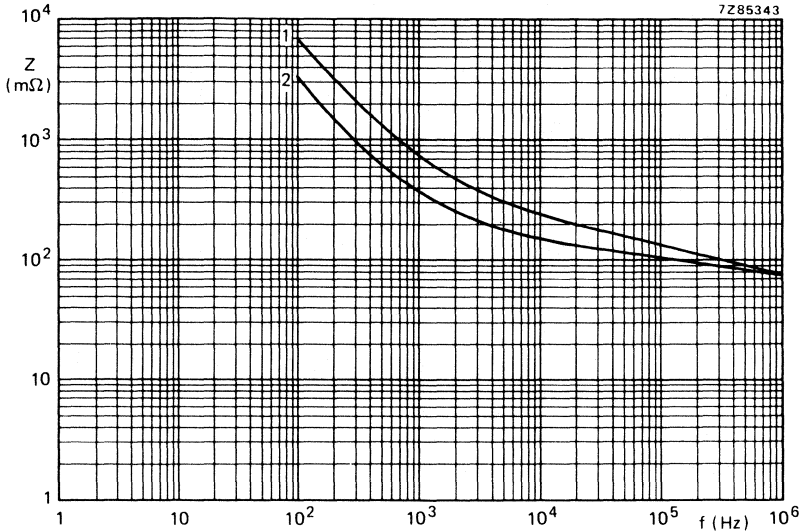


Fig. 20 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 11:  
curve 1 =  $220\text{ }\mu\text{F}$ , 385 V;  
curve 2 =  $470\text{ }\mu\text{F}$ , 250 V.

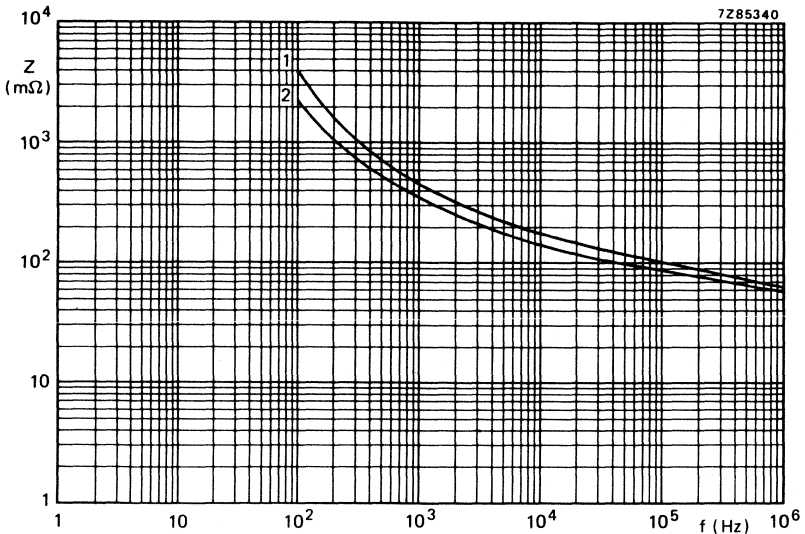


Fig. 21 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 12a:  
curve 1 =  $330\text{ }\mu\text{F}$ , 385 V;  
curve 2 =  $680\text{ }\mu\text{F}$ , 250 V.

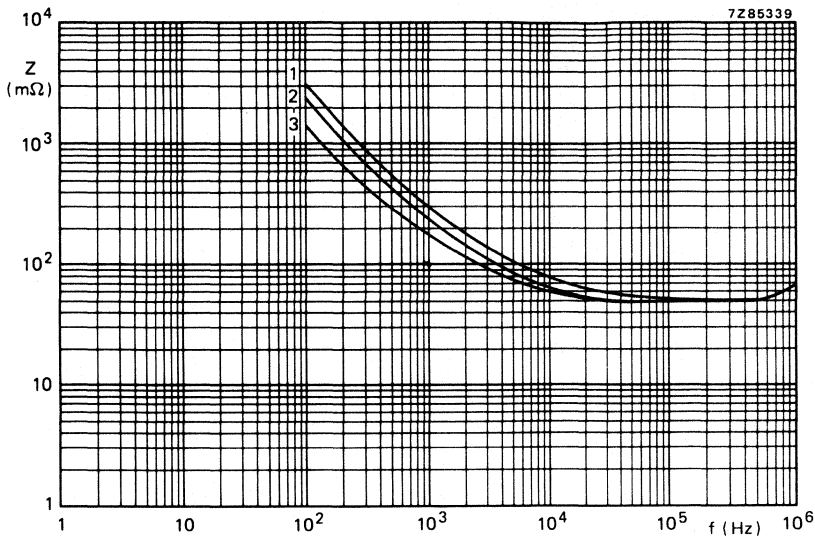


Fig. 22 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 14:  
curve 1 =  $470\text{ }\mu\text{F}$ , 385 V;  
curve 2 =  $680\text{ }\mu\text{F}$ , 350 V;  
curve 3 =  $1000\text{ }\mu\text{F}$ , 250 V.

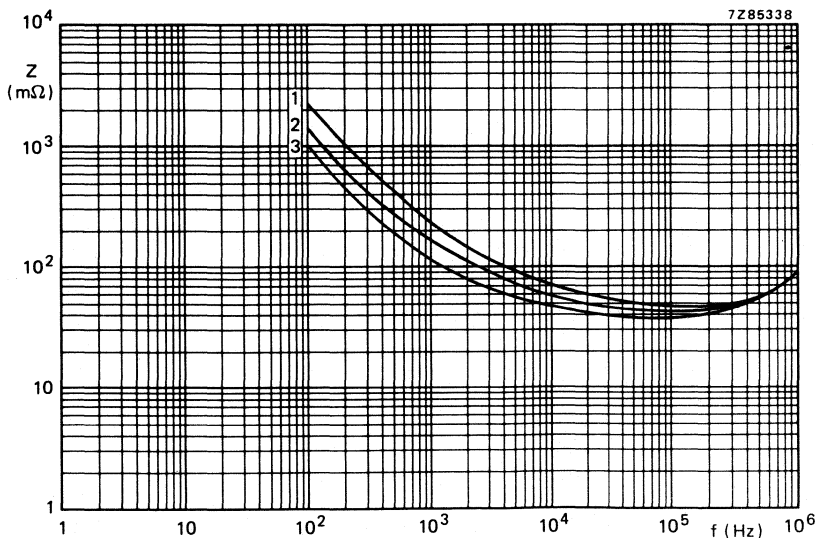


Fig. 23 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 15a:  
curve 1 =  $680\text{ }\mu\text{F}$ , 385 V;  
curve 2 =  $1000\text{ }\mu\text{F}$ , 350 V;  
curve 3 =  $1500\text{ }\mu\text{F}$ , 250 V.

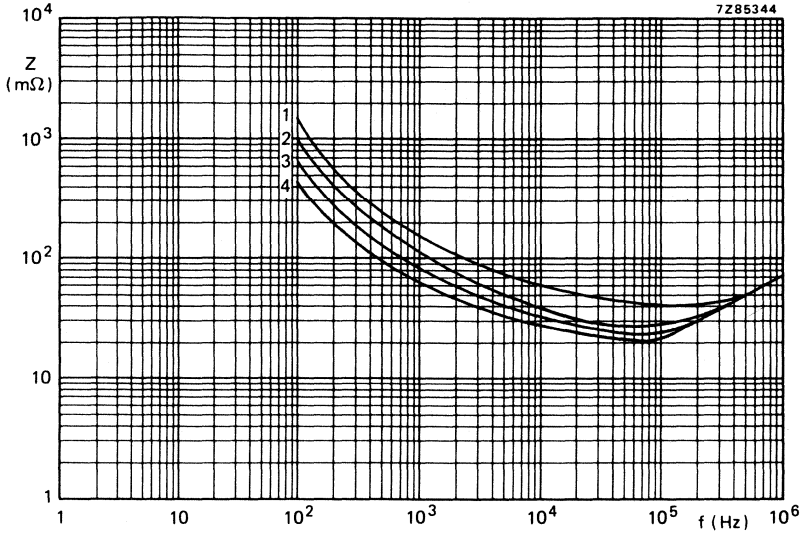


Fig. 24 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 16a**:  
curve 1 = 1000  $\mu\text{F}$ , 385 V; curve 2 = 1500  $\mu\text{F}$ , 385 V;  
curve 3 = 2200  $\mu\text{F}$ , 250 V; curve 4 = 3300  $\mu\text{F}$ , 250 V.

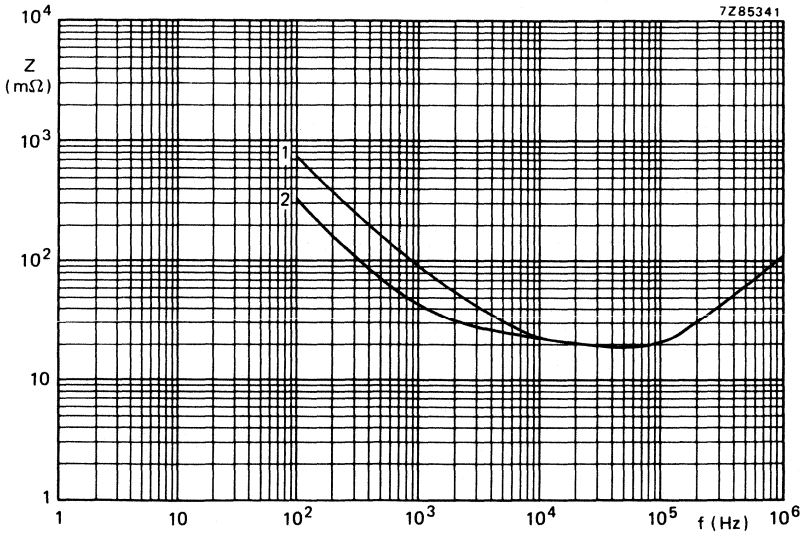


Fig. 25 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; **case size 17**:  
curve 1 = 2200  $\mu\text{F}$ , 385 V; curve 2 = 4700  $\mu\text{F}$ , 250 V.

**Equivalent series inductance (ESL)**

| case size      | typ. inductance |
|----------------|-----------------|
| 10, 11 and 12a | 13 nH           |
| 14 and 15a     | 16 nH           |
| 16a            | 19 nH           |
| 17             | 20 nH           |

**OPERATIONAL DATA****Category temperature range** (for rated voltage)

-40 to + 85 °C

**Life expectancy**

Typical life time

at  $T_{amb} = 85\text{ °C}$ 

&gt; 10 000 h

at  $T_{amb} = 40\text{ °C}$ 

&gt; 200 000 h (25 years)

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$ 

500 h

**Failure rate**Failure rate, catastrophic, at rated voltage,  $T_{amb} = 40\text{ °C}$ ,  
confidence level 60%<  $10^{-7}$  ←**PACKING**

The capacitors are packed in boxes.

Case sizes 10, 11, 12a, 14 and 15a: 50 capacitors per box;

case sizes 16a and 17: 25 capacitors per box.

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 114 and 2222 115 are large types with screw terminals, long-life grade.

**MOUNTING ACCESSORIES**

**Clamps**

To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slipped over the capacitor and then clamped with a nut and bolt. The clamps have either two or three mounting lugs. Four types of clamp are available, one for each case diameter. They are delivered without nuts or bolts.

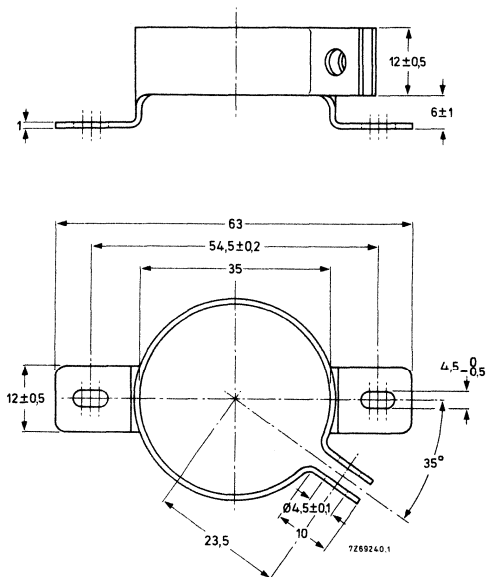


Fig. 26 Clamp for case diameter of 35 mm.  
Catalogue number: 4322 043 04272.

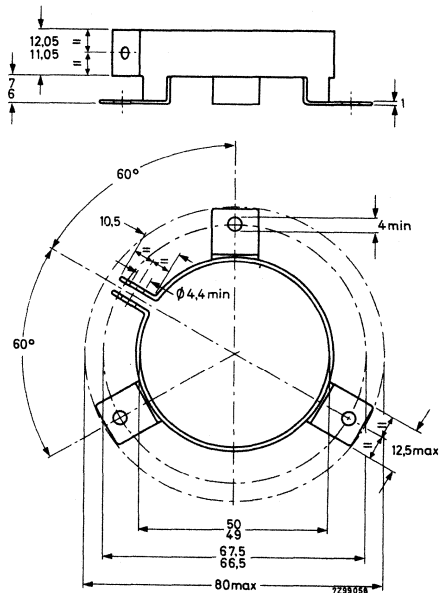


Fig. 27 Clamp for case diameter of 50 mm.  
Catalogue number: 4322 043 04281.



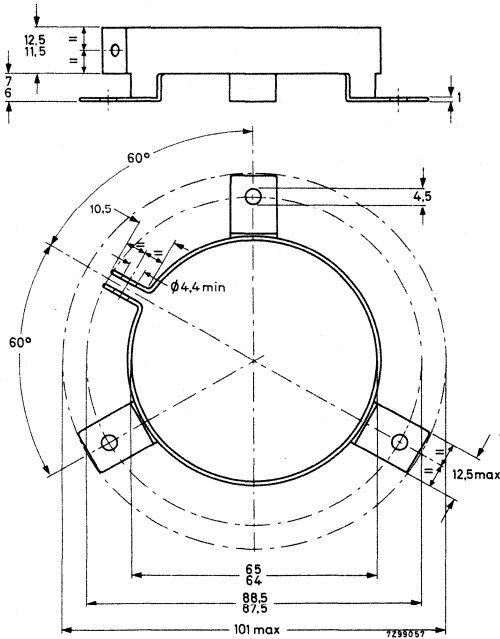


Fig. 28 Clamp for case diameter of 65 mm.  
Catalogue number: 4322 043 04291.

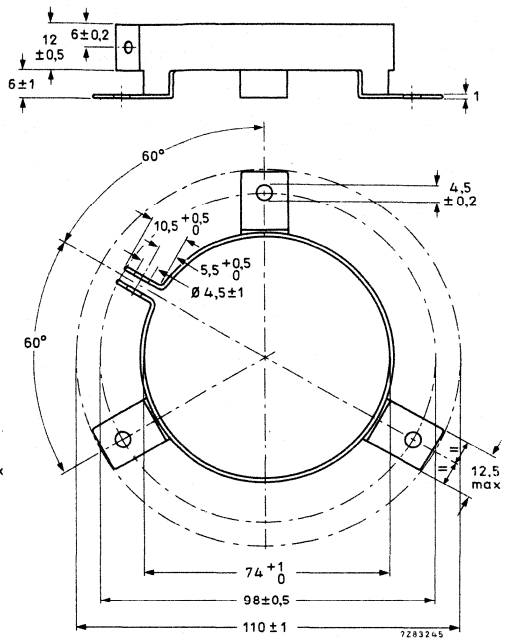


Fig. 29 Clamp for case diameter of 75 mm.  
Catalogue number: 4322 043 12990.

**Bolt/nut**

When mounting with the bolt, which is an integral part of the case, standard metal M8 and M12 nuts and washers can be used; the maximum permissible torque is 7Nm for M8 nuts, and 19Nm for M12 nuts. If insulated mounting is required, synthetic nuts and rubber washers are available; for these nuts the maximum permissible torque is 4Nm (M8) and 11Nm (M12).

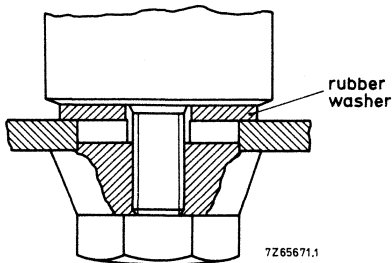


Fig. 30 Insulated mounting.





Fig. 31 Synthetic cap nut; see Table 5  
(next page) for dimensions D, H and W.

Table 5

| thread | D  | H  | W* | min. threaded depth | catalogue number |
|--------|----|----|----|---------------------|------------------|
| M8     | 25 | 15 | 17 | 11,5                | 4322 043 05561   |
| M12    | 30 | 20 | 19 | 15,5                | 4322 043 05571   |



dimensions in mm


| D  | d   | catalogue number |
|----|-----|------------------|
| 34 | 8,4 | 4322 043 05591   |
| 49 | 13  | 4322 043 05531   |
| 64 | 13  | 4322 043 05521   |
| 74 | 13  | 4322 043 13000   |

Fig. 32 Rubber washer; thickness 2 mm.

\* W measured across flats.

## ALUMINIUM ELECTROLYTIC CAPACITORS

- High-temperature version of 2222 036 series
- Miniature type
- Single ended
- Long life
- Industrial applications
- High CU product per unit volume

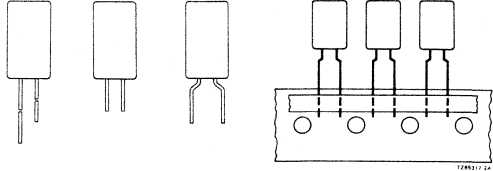

## QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range (E6 series)  | 0,47 to 470 $\mu\text{F}$   |
| Tolerance on nominal capacitance       | -20 to +20%   |
| Rated voltage range, $U_R$ (R5 series) | 6,3 to 50 V   |
| Category temperature range             | -55 to +105 $^{\circ}\text{C}$                                    |
| Endurance test                         | 1500 h at 105 $^{\circ}\text{C}$ /5000 h at 85 $^{\circ}\text{C}$ |
| Shelf life at 0 V                      | 1500 h at 105 $^{\circ}\text{C}$ /5000 h at 85 $^{\circ}\text{C}$ |
| Basic specification                    | IEC 384-4, long-life grade<br>DIN 41332/DIN 41259                 |
| Climatic category                      |   |
| IEC 68                                 | 55/105/56   |
| DIN 40040                              | FPF   |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 35 | 50 |
| 0,47                              |           |    |    |    |    | 11 |
| 0,68                              |           |    |    |    |    | 11 |
| 1                                 |           |    |    |    |    | 11 |
| 1,5                               |           |    |    |    |    | 11 |
| 2,2                               |           |    |    |    |    | 11 |
| 3,3                               |           |    |    |    |    | 11 |
| 4,7                               |           |    |    |    |    | 11 |
| 6,8                               |           |    |    |    |    | 11 |
| 10                                |           |    |    |    |    | 11 |
| 15                                |           |    |    |    |    | 11 |
| 22                                |           |    |    |    |    | 11 |
| 33                                |           |    |    |    | 11 | 13 |
| 47                                |           |    |    | 11 |    | 13 |
| 68                                |           |    | 11 |    |    | 13 |
| 100                               |           | 11 |    |    | 13 |    |
| 150                               | 11        |    |    | 13 |    |    |
| 220                               |           |    | 13 |    |    |    |
| 330                               |           | 13 |    |    |    |    |
| 470                               | 13        |    |    |    |    |    |

| case size | nominal dimensions (mm)     |
|-----------|-----------------------------|
| 11        | $\varnothing 5 \times 11$   |
| 13        | $\varnothing 8,2 \times 11$ |

**APPLICATION**

These capacitors with extremely high CU product to volume ratio are mainly used for smoothing, coupling and decoupling purposes in industrial applications, where high reliability and/or a wide temperature range is required. Other applications are timing and delay circuits. The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor has etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitor is in an all-insulated aluminium case.

**MECHANICAL DATA**

Dimensions in mm

The capacitor is available in 6 styles:

- style 1: long leads; in boxes;
- style 2: straight short leads; non preferred, in boxes;
- style 3: bent short leads (only case size 11); non preferred, in boxes;
- style 4: long leads; on tape on reel, positive leading;
- style 5: long leads; on tape in ammunition pack;
- style 6: long leads; on tape on reel, negative leading.

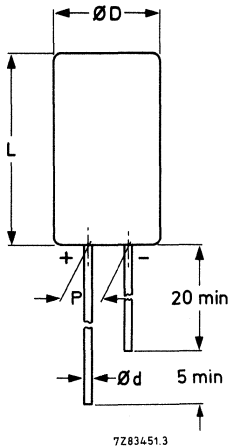


Fig. 1. Style 1; see Table 1 for dimensions d, D, L and P.

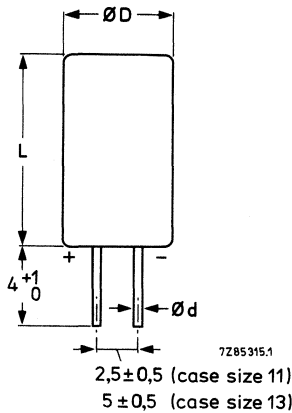


Fig. 2 Style 2; non preferred, see Table 1 for dimensions d, D and L.

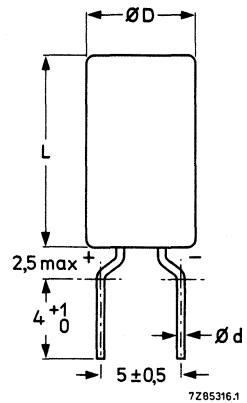


Fig. 3 Style 3; case size 11 only; non preferred, see Table 1 for dimensions d, D and L.

Table 1

| case size | dimensions |                  |                  |     | mass approx. g |
|-----------|------------|------------------|------------------|-----|----------------|
|           | d          | D <sub>max</sub> | L <sub>max</sub> | P   |                |
| 11        | 0,5*       | 5,5              | 12,0             | 2,5 | 0,4            |
| 13        | 0,6        | 8,7              | 12,0             | 5,0 | 1,1            |

\* 0,6 mm under consideration.

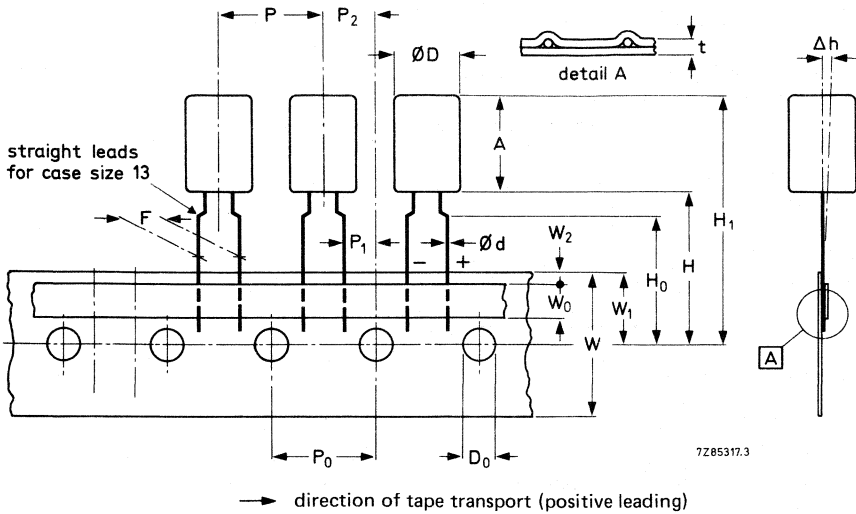


Fig. 4 Styles 4, 5 and 6; see Table 2 for dimensions. For style 6 the tape transport is in opposite direction (negative leading).

Table 2

|                                      | symbol         | case size |      | tol.     |
|--------------------------------------|----------------|-----------|------|----------|
|                                      |                | 11        | 13   |          |
| Body diameter                        | D              | 5,5       | 8,7  | max.     |
| Body height                          | A              | 12,0      | 12,0 | max.     |
| Lead-wire diameter                   | d              | 0,5*      | 0,6  | ± 0,05   |
| Pitch of component                   | P              | 12,7      | 12,7 | ± 1,0    |
| Feed-hole pitch                      | P <sub>0</sub> | 12,7      | 12,7 | ± 0,2**  |
| Hole centre to lead                  | P <sub>1</sub> | 3,85      | 3,85 | ± 0,5    |
| Feed hole centre to component centre | P <sub>2</sub> | 6,35      | 6,35 | ± 0,7    |
| Lead-to-lead distance                | F              | 5,0       | 5,0  | + 0,6/-0 |
| Component alignment                  | Δh             | 0         | 0    | ± 1,0    |
| Tape width                           | W              | 18,0      | 18,0 | ± 0,5    |
| Hold-down tape width                 | W <sub>0</sub> | 6,0       | 6,0  | min.     |
| Hole position                        | W <sub>1</sub> | 9,0       | 9,0  | ± 0,5    |
| Hold-down tape position              | W <sub>2</sub> | 2,5       | 2,5  | max.     |
| Height of component from tape centre | H              | 18,0      | 18,0 | + 1,5/-0 |
| Lead-wire clinch height              | H <sub>0</sub> | 16,0      | —    | ± 0,5    |
| Component height                     | H <sub>1</sub> | 32,0      | 32,0 | max.     |
| Feed-hole diameter                   | D <sub>0</sub> | 4,0       | 4,0  | ± 0,2    |
| Total tape thickness                 | t              | 0,9       | 0,9  | max.     |

\* 0,6 mm under consideration.

\*\* Cumulative pitch error: ± 1 mm/20 pitches.

**Marking**

The capacitors are marked as follows:

*on the top*

- nominal capacitance;
- code letter for tolerance on nominal capacitance, according to IEC 62;
- rated voltage;
- polarity identification.

*on the circumference*

- name of manufacturer;
- group number (116); code for long-life grade (LL);
- code letter of manufacturer;
- date code (year and month) according to IEC 62.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled; caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 3 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

Table 3

| UR  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current mA          |   | max. d.c. leakage current at UR after 1 min $\mu\text{A}$ | max. $\tan \delta$ | case size* | catalogue number 2222 116 followed by |         |         |                   |                    |                  |
|-----|-------------------------|--|---|---|--------------------|------------|---------------------------------------|---------|---------|-------------------|--------------------|------------------|
|     |                         | at $T_{\text{amb}} = 85^\circ\text{C}$ | at $T_{\text{amb}} = 105^\circ\text{C}$ |   |                    |            | style 1                               | style 2 | style 3 | on reel** style 4 | in ammpack style 5 | on reel▲ style 6 |
| 6,3 | 150                     | 81                                     | 47                                      | 8,7   | 0,25               | 11         | 53151                                 | 83151   | 63151   | 23151             | 33151              | 43151            |
|     | 470                     | 190                                    | 110                                     | 21  | 0,25               | 13         | 53471                                 | 63471   | 23471   | 33471             | 43471              |                  |
| 10  | 100                     | 74                                     | 43                                      | 9   | 0,2                | 11         | 54101                                 | 84101   | 64101   | 24101             | 34101              | 44101            |
|     | 330                     | 180                                    | 105                                     | 23  | 0,2                | 13         | 54331                                 | 64331   | 24331   | 34331             | 44331              |                  |
| 16  | 68                      | 69                                     | 40                                      | 9,5   | 0,16               | 11         | 55689                                 | 85689   | 65689   | 25689             | 35689              | 45689            |
|     | 220                     | 165                                    | 95                                      | 24  | 0,16               | 13         | 55221                                 | 65221   | 25221   | 35221             | 45221              |                  |
| 25  | 47                      | 61                                     | 35                                      | 10  | 0,14               | 11         | 56479                                 | 86479   | 66479   | 26479             | 36479              | 46479            |
|     | 150                     | 145                                    | 83                                      | 26  | 0,14               | 13         | 56151                                 | 66151   | 26151   | 36151             | 46151              |                  |
| 35  | 33                      | 55                                     | 32                                      | 9,9   | 0,12               | 11         | 50339                                 | 80339   | 60339   | 20339             | 30339              | 40339            |
|     | 100                     | 130                                    | 74                                      | 24  | 0,12               | 13         | 50101                                 | 60101   | 20101   | 30101             | 40101              |                  |
| 50  | 0,47                    | 7,6                                    | 4,4                                     | 3,1   | 0,09               | 11         | 51477                                 | 81477   | 61477   | 21477             | 31477              | 41477            |
|     | 0,68                    | 9,1                                    | 5,3                                     | 3,2   | 0,09               | 11         | 51687                                 | 81687   | 61687   | 21687             | 31687              | 41687            |
| 1   | 1                       | 11                                     | 6,4                                     | 3,3   | 0,09               | 11         | 51108                                 | 81108   | 61108   | 21108             | 31108              | 41108            |
|     | 1,5                     | 13,5                                   | 7,8                                     | 3,5   | 0,09               | 11         | 51158                                 | 81158   | 61158   | 21158             | 31158              | 41158            |
| 2,2 | 2,2                     | 16,5                                   | 9,5                                     | 3,7   | 0,09               | 11         | 51228                                 | 81228   | 61228   | 21228             | 31228              | 41228            |
|     | 3,3                     | 20                                     | 11,5                                    | 4   | 0,09               | 11         | 51338                                 | 81338   | 61338   | 21338             | 31338              | 41338            |
| 4,7 | 4,7                     | 24                                     | 14                                      | 4,4   | 0,09               | 11         | 51478                                 | 81478   | 61478   | 21478             | 31478              | 41478            |
|     | 6,8                     | 29                                     | 16,5                                    | 5   | 0,09               | 11         | 51688                                 | 81688   | 61688   | 21688             | 31688              | 41688            |
| 10  | 10                      | 35                                     | 20                                      | 6   | 0,09               | 11         | 51109                                 | 81109   | 61109   | 21109             | 31109              | 41109            |
|     | 15                      | 43                                     | 25                                      | 7,5   | 0,09               | 11         | 51159                                 | 81159   | 61159   | 21159             | 31159              | 41159            |
| 22  | 22                      | 52                                     | 30                                      | 9,6   | 0,09               | 11         | 51229                                 | 81229   | 61229   | 21229             | 31229              | 41229            |
|     | 33                      | 85                                     | 49                                      | 13  | 0,09               | 13         | 51339                                 | 61339   | 21339   | 31339             | 41339              |                  |
| 47  | 47                      | 100                                    | 58                                      | 17  | 0,09               | 13         | 51479                                 | 61479   | 21479   | 31479             | 41479              |                  |
|     | 68                      | 120                                    | 70                                      | 23  | 0,09               | 13         | 51689                                 | 61689   | 21689   | 31689             | 41689              |                  |

\*\* Positive leading.

▲ Negative leading.

\* Case size 11:  $\phi$  5 mm x 11 mm; case size 13:  $\phi$  8,2 mm x 11 mm (nominal dimensions).

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 3

-20 to +20%

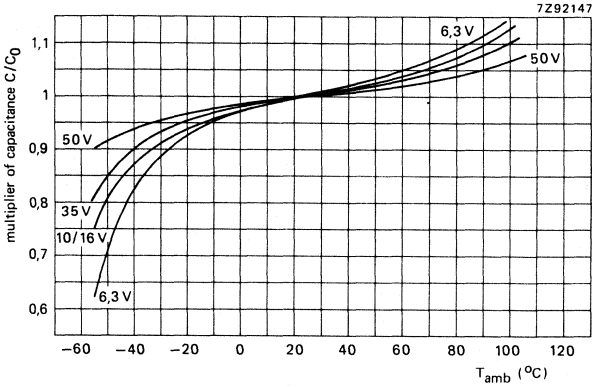


Fig. 5 Typical multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at 20  $^{\circ}\text{C}$ , 100 Hz.

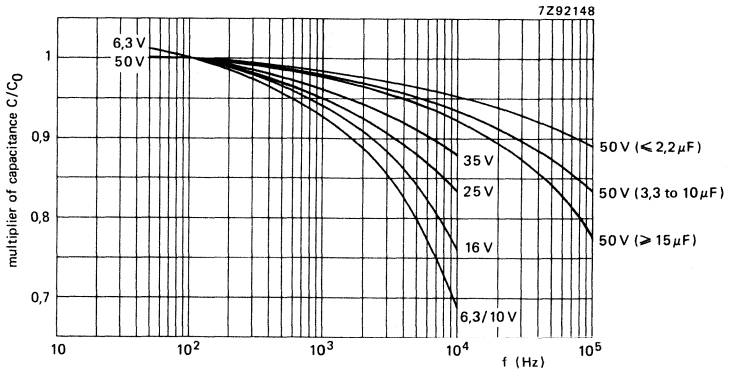


Fig. 6 Typical multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at 20  $^{\circ}\text{C}$ , 100 Hz.



**Voltage**

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- (a) max. (d.c. + peak a.c.) voltage
- (b) max. peak a.c. voltage without d.c. voltage applied
- (c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

| core temperature <sup>▲</sup>   |                      |
|---------------------------------|----------------------|
| < 95 °C                         | 95 to 115 °C         |
| 1,3 × U <sub>R</sub>            | U <sub>R</sub>       |
| 1,3 × U <sub>R</sub>            | U <sub>R</sub>       |
| 2 V                             |                      |
| between U <sub>R</sub> and -2 V |                      |
| 1,5 × U <sub>R</sub>            | 1,3 × U <sub>R</sub> |
| 2 V                             |                      |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and T<sub>amb</sub> = 85 °C and 105 °C

see Table 3

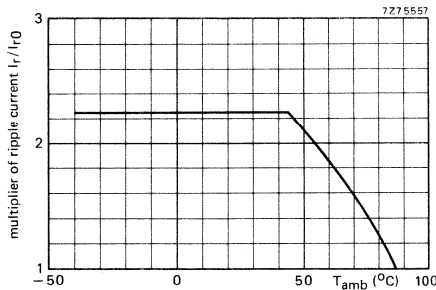


Fig. 7 Typical multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at 85 °C, 100 Hz.

<sup>▲</sup> See Introduction, section 5, "Ripple current".

\* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

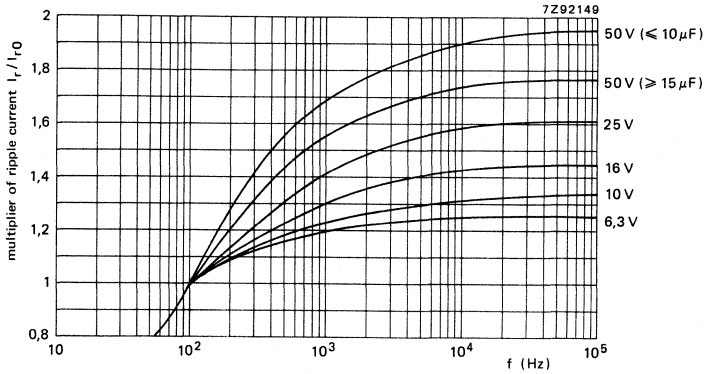


Fig. 8 Typical multiplier of ripple current as a function of frequency;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

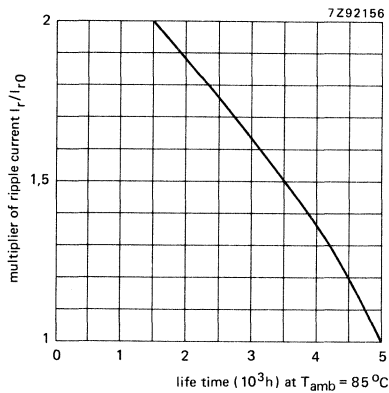


Fig. 9 Typical multiplier of ripple current as a function of life time at 85 °C;  $I_{r0}$  = ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents. The following requirements must then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r \max}^2$$

- $I_{r \max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;
- $I_n$  = ripple current at a certain frequency;
- $\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

There is no limit on the charge or discharge rate. If the capacitors are charged and discharged continuously several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and requirements.)

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$  at  $T_{amb} = 20\text{ }^\circ\text{C}$

see Table 3 (0,006 CU + 3  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ ,  
 at  $T_{amb} = 25\text{ }^\circ\text{C}$   
 at  $T_{amb} = 85\text{ }^\circ\text{C}$

approx. 0,05 x value stated in Table 3  
 $\leq$  value stated in Table 3

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ ,  
 measured by a four-terminal circuit (Thomson circuit)

see Table 3

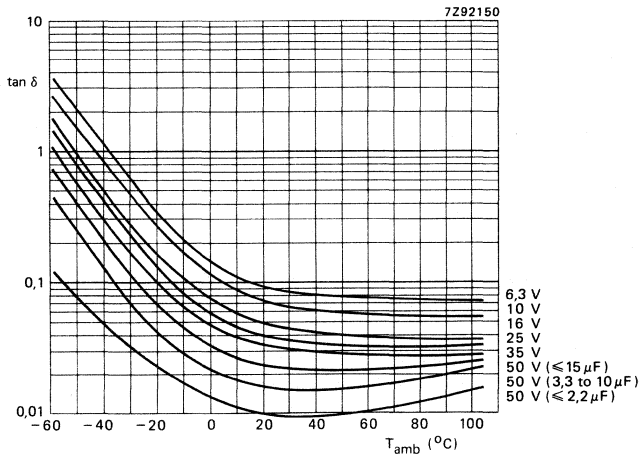


Fig. 10 Typical tan  $\delta$  at 100 Hz as a function of ambient temperature.

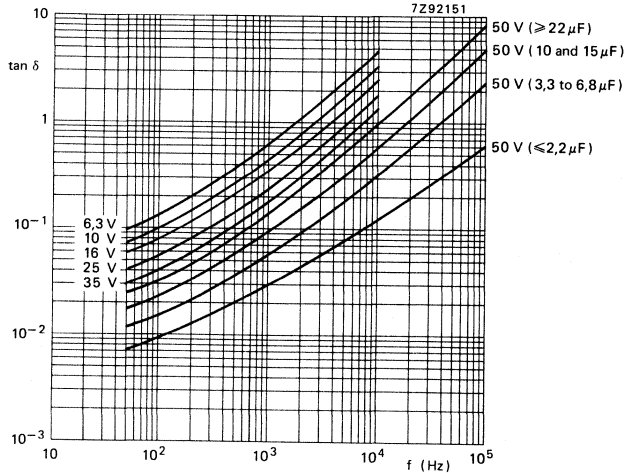


Fig. 11 Typical  $\tan \delta$  as a function of frequency at  $T_{amb} = 20\text{ }^\circ\text{C}$ .

**Equivalent series resistance (ESR)**

$ESR = \tan \delta / \omega C$

Maximum  $\tan \delta$  and C at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 3

**Equivalent series inductance (ESL)**

Case size 11

typ. 13 nH

Case size 13

typ. 16 nH

**Impedance (Z)**

Maximum impedance at  $T_{amb} = 20\text{ }^\circ\text{C}$ ,  $-25\text{ }^\circ\text{C}$  and  $-40\text{ }^\circ\text{C}$  and 10 kHz, measured by a four-terminal circuit

(Thomson circuit)

see Table 4

Maximum ratio between impedances at  $T_{amb} = -25\text{ }^\circ\text{C}$  and  $+20\text{ }^\circ\text{C}$ , at  $T_{amb} = -40\text{ }^\circ\text{C}$  and  $+20\text{ }^\circ\text{C}$ , and at  $T_{amb} = -55\text{ }^\circ\text{C}$  and  $+20\text{ }^\circ\text{C}$ , at 100 Hz measured by a four-terminal circuit

(Thomson circuit)

see Table 4

Table 4

| U <sub>R</sub> | nom. cap.<br>V<br>μF | case size* | max. impedance at 10 kHz         |                                   |                                   | maximum impedance ratio at U <sub>R</sub> and 100 Hz |                            |                            |
|----------------|----------------------|------------|----------------------------------|-----------------------------------|-----------------------------------|--|----------------------------|----------------------------|
|                |                      |            | T <sub>amb</sub> =<br>20 °C<br>Ω | T <sub>amb</sub> =<br>-25 °C<br>Ω | T <sub>amb</sub> =<br>-40 °C<br>Ω | Z at -25 °C<br>Z at +20 °C                           | Z at -40 °C<br>Z at +20 °C | Z at -55 °C<br>Z at +20 °C |
| 6,3            | 150                  | 11         | 2                                | 12                                | 32                                | 2  | 3                          | 8                          |
|                | 470                  | 13         | 0,64                             | 3,8                               | 10                                | 2  | 3                          | 8                          |
| 10             | 100                  | 11         | 2                                | 12                                | 32                                | 1,5  | 2                          | 6                          |
|                | 330                  | 13         | 0,61                             | 3,6                               | 9,7                               | 1,5  | 2                          | 6                          |
| 16             | 68                   | 11         | 2,4                              | 11                                | 29                                | 1,5  | 2                          | 5                          |
|                | 220                  | 13         | 0,73                             | 3,4                               | 9,1                               | 1,5  | 2                          | 5                          |
| 25             | 47                   | 11         | 2,6                              | 12                                | 32                                | 1,5  | 2                          | 4                          |
|                | 150                  | 13         | 0,8                              | 3,7                               | 10                                | 1,5  | 2                          | 4                          |
| 35             | 33                   | 11         | 2,7                              | 12                                | 33                                | 1,5  | 2                          | 3                          |
|                | 100                  | 13         | 0,9                              | 4                                 | 11                                | 1,5  | 2                          | 3                          |
| 50             | 0,47                 | 11         | 150                              | 640                               | 1900                              | 1,3  | 1,5                        | 2                          |
|                | 0,68                 | 11         | 105                              | 440                               | 1300                              | 1,3  | 1,5                        | 2                          |
|                | 1                    | 11         | 70                               | 300                               | 900                               | 1,3  | 1,5                        | 2                          |
|                | 1,5                  | 11         | 47                               | 200                               | 600                               | 1,3  | 1,5                        | 2                          |
|                | 2,2                  | 11         | 32                               | 135                               | 410                               | 1,3  | 1,5                        | 2                          |
|                | 3,3                  | 11         | 21                               | 91                                | 270                               | 1,5  | 2                          | 3                          |
|                | 4,7                  | 11         | 15                               | 64                                | 190                               | 1,5  | 2                          | 3                          |
|                | 6,8                  | 11         | 10,5                             | 44                                | 130                               | 1,5  | 2                          | 3                          |
|                | 10                   | 11         | 7                                | 30                                | 90                                | 1,5  | 2                          | 3                          |
|                | 15                   | 11         | 4,7                              | 20                                | 60                                | 1,5  | 2                          | 3                          |
|                | 22                   | 11         | 3,2                              | 13,5                              | 41                                | 1,5  | 2                          | 3                          |
|                | 33                   | 13         | 2,1                              | 9,1                               | 27                                | 1,5  | 2                          | 3                          |
|                | 47                   | 13         | 1,5                              | 6,4                               | 19                                | 1,5  | 2                          | 3                          |
|                | 68                   | 13         | 1,05                             | 4,4                               | 13                                | 1,5  | 2                          | 3                          |

\* Case size 11: φ 5 mm x 11 mm; case size 13: φ 8,2 x 11 mm (nominal dimensions).

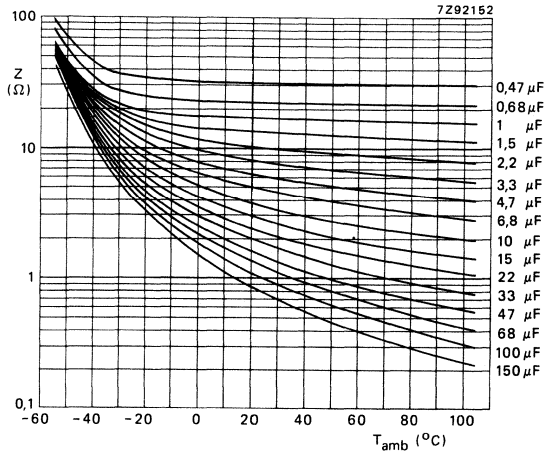


Fig. 12 Typical impedance at 10 kHz as a function of ambient temperature, case size 11.

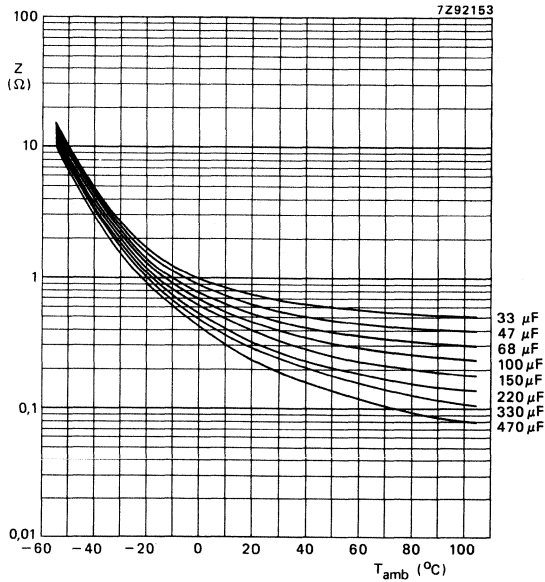


Fig. 13 Typical impedance at 10 kHz as a function of ambient temperature, case size 13.

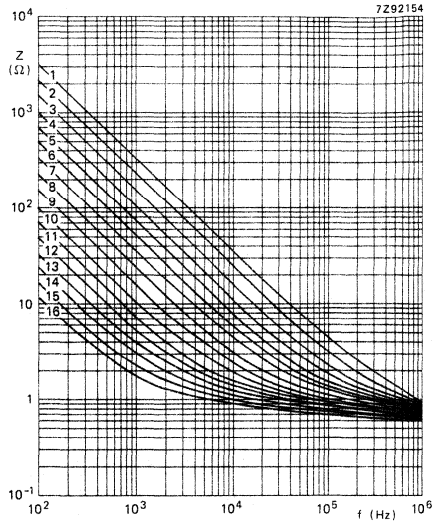


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 11:

|                                |                               |                                |
|--------------------------------|-------------------------------|--------------------------------|
| curve 1 = 0,47 $\mu\text{F}$ ; | curve 7 = 4,7 $\mu\text{F}$ ; | curve 13 = 47 $\mu\text{F}$ ;  |
| curve 2 = 0,68 $\mu\text{F}$ ; | curve 8 = 6,8 $\mu\text{F}$ ; | curve 14 = 68 $\mu\text{F}$ ;  |
| curve 3 = 1 $\mu\text{F}$ ;    | curve 9 = 10 $\mu\text{F}$ ;  | curve 15 = 100 $\mu\text{F}$ ; |
| curve 4 = 1,5 $\mu\text{F}$ ;  | curve 10 = 15 $\mu\text{F}$ ; | curve 16 = 150 $\mu\text{F}$ ; |
| curve 5 = 2,2 $\mu\text{F}$ ;  | curve 11 = 22 $\mu\text{F}$ ; |                                |
| curve 6 = 3,3 $\mu\text{F}$ ;  | curve 12 = 33 $\mu\text{F}$ ; |                                |

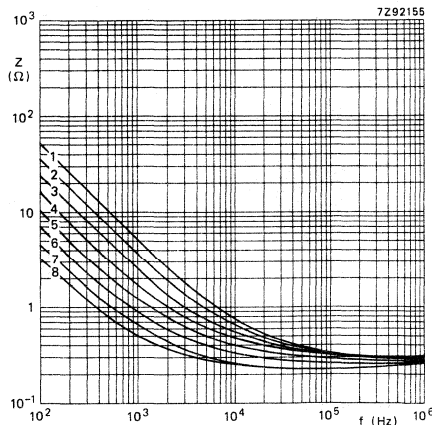


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , case size 13:

|                              |                               |                               |
|------------------------------|-------------------------------|-------------------------------|
| curve 1 = 33 $\mu\text{F}$ ; | curve 4 = 100 $\mu\text{F}$ ; | curve 7 = 330 $\mu\text{F}$ ; |
| curve 2 = 47 $\mu\text{F}$ ; | curve 5 = 150 $\mu\text{F}$ ; | curve 8 = 470 $\mu\text{F}$ ; |
| curve 3 = 68 $\mu\text{F}$ ; | curve 6 = 220 $\mu\text{F}$ ; |                               |

**OPERATIONAL DATA**

|                              |                 |
|------------------------------|-----------------|
| Category temperature range   | -55 to + 105 °C |
| Typical life time            |                 |
| at $T_{amb} = 40\text{ °C}$  | 120 000 h       |
| at $T_{amb} = 85\text{ °C}$  | 6000 h          |
| at $T_{amb} = 105\text{ °C}$ | 2000 h          |
| Shelf life at 0 V            |                 |
| at $T_{amb} = 85\text{ °C}$  | 5000 h          |
| at $T_{amb} = 105\text{ °C}$ | 1500 h          |

**PACKING**

Capacitors of styles 1, 2 and 3 are supplied in boxes, those of styles 4, 6 and 5 on tape on reel and in ammunition pack respectively. The numbers per box, per reel and per ammunition pack are given in Table 5.

Table 5

| case size | number of capacitors |                    |                    |                                      |                                |
|-----------|----------------------|--------------------|--------------------|--------------------------------------|--------------------------------|
|           | style 1<br>per box   | style 2<br>per box | style 3<br>per box | styles 4 and 6<br>per reel<br>(min.) | style 5<br>per ammunition pack |
| 11        | 1000                 | 1000               | 1000               | 1000                                 | 2000                           |
| 13        | 1000                 | 1000               | 1000               | 500                                  | 1000                           |

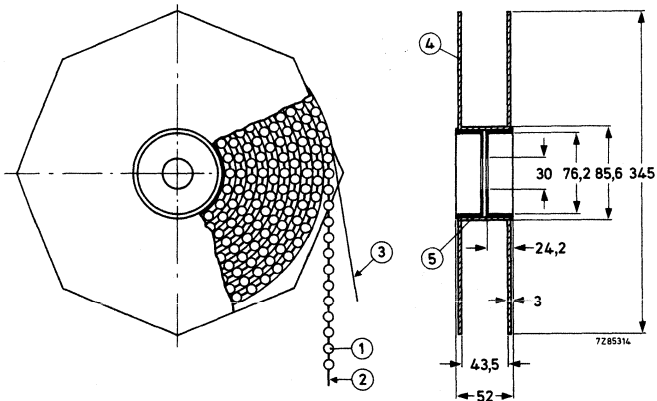


Fig. 16 Capacitors (style 4) on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder



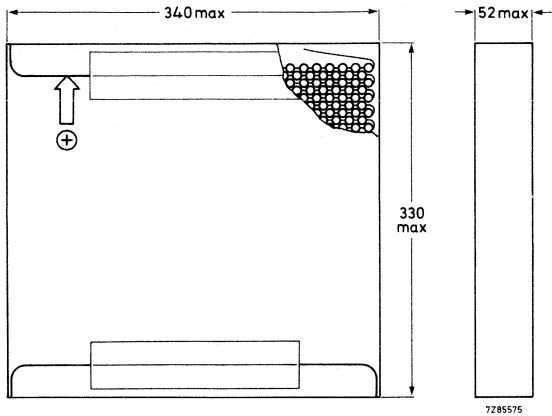


Fig. 17 Capacitors (style 5) on tape in ammunition pack.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test*, at  $U_R$ , 1500 h, 105 °C or 5000 h, 85 °C, the capacitors meet the following requirements:

$\Delta C/C \leq \pm 20\%$ , for  $U_R = 10$  to 50 V;

$\Delta C/C \leq +20\%$ ,  $-30\%$  for  $U_R = 6,3$  V;

$\tan \delta \leq 130\%$  of specified value;

d.c. leakage current  $\leq$  specified value

After *shelf life test*, at 0 V, the capacitors meet the same requirements, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 116 are miniature, long-life grade.




# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

2222 117

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Ultra miniature type
- Axial leads or single ended
- Very high CU-product per unit volume
- General applications

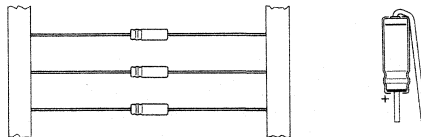

### QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range (E6 series)    | 0,1 to 22 $\mu\text{F}$                     |
| Tolerance on nominal capacitance         | -10 to +50% ( $\pm 20\%$ to special order)  |
| Rated voltage range, $U_R$ (R5 series)   | 6,3 to 63 V                                 |
| Category temperature range               | -40 to +85 $^{\circ}\text{C}$               |
| Endurance test at 85 $^{\circ}\text{C}$  | 1500 h                                      |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ | 500 h                                       |
| Basic specification                      | IEC 384-4, G.P. grade<br>DIN 41332, type II |
| Climatic category                        |   |
| IEC 68                                   | 40/085/56                                   |
| DIN 40040                                | GPF   |

Selection chart for  $C_{\text{nom}} \cdot U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 40 | 63 |
| 0,1                               |           |    |    |    |    | 1a |
| 0,15                              |           |    |    |    |    | 1a |
| 0,22                              |           |    |    |    |    | 1a |
| 0,33                              |           |    |    |    |    | 1a |
| 0,47                              |           |    |    |    |    | 1a |
| 0,68                              |           |    |    |    |    | 1a |
| 1                                 |           |    |    |    |    | 1a |
| 1,5                               |           |    |    |    |    | 1a |
| 2,2                               |           |    |    |    | 1a | 1  |
| 3,3                               |           |    |    | 1a |    | 1  |
| 4,7                               |           |    | 1a |    | 1  |    |
| 6,8                               |           | 1a |    | 1  |    |    |
| 10                                | 1a        |    | 1  |    |    |    |
| 15                                |           | 1  |    |    |    |    |
| 22                                | 1         |    |    |    |    |    |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 1a        | $\phi$ 3,3 x 8          |
| 1         | $\phi$ 3,3 x 11         |

**APPLICATION**

These capacitors have extremely high CU-product per unit volume, which render them very suitable for applications, where high requirements are imposed on size and mass, e.g. portable and mobile high density electronic equipment. They are mainly used for smoothing, coupling and decoupling purposes in consumer applications, such as audio and video circuits, and in other applications such as measuring, regulating, timing and delay circuits. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have highly etched and oxidized aluminium foil electrodes rolled up with a paper strip impregnated with an electrolyte. The capacitors are in an aluminium case, which is insulated with a blue plastic sleeve.

The capacitors are available in 2 styles, both with soldered-copper leads.

Style 1: axial leads; supplied on bandoliers.

Style 3: single ended.

**MECHANICAL DATA**

Dimensions in mm

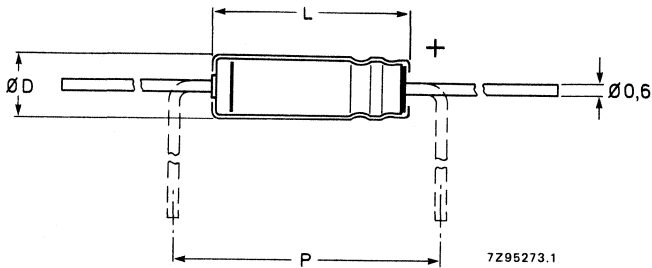


Fig. 1 Style 1; see Table 1a for dimensions D, L and P.


**Table 1a**

| case size | style 1          |                  |                  |                  |                  | mass approx. g |
|-----------|------------------|------------------|------------------|------------------|------------------|----------------|
|           | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| → 1a      | 3,3              | 8                | 3,5              | 9                | 12,5             | 0,30           |
| → 1       | 3,3              | 11               | 3,5              | 12               | 15               | 0,35           |

Table 1b

| case size | style 3          |                  |       | mass approx. g |
|-----------|------------------|------------------|-------|----------------|
|           | D <sub>max</sub> | L <sub>max</sub> | P     |                |
| 1a        | 3,5              | 11               | 2 - 5 | 0,20           |
| 1         | 3,5              | 14               | 2 - 5 | 0,25           |

Fig. 2 Style 3: see Table 1b for dimensions D, L and P.

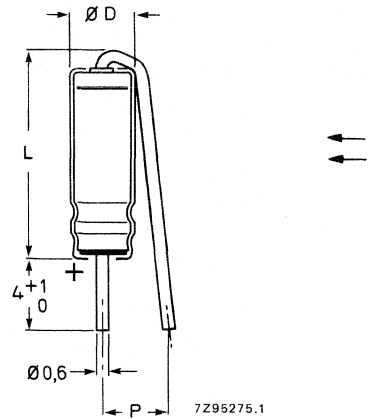

### Marking

The capacitors are marked with:

- nominal capacitance;
- rated voltage;
- group number; code of origin;
- name of manufacturer;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal.

### Mounting

The capacitors are suitable for mounting on printed-wiring boards; the required hole diameter is  $0,8 + 0,1$  mm.

### Minimum atmospheric pressure

8,5 kPa

### PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled; caution is necessary should the outer case be fractured.

ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| UR  | nom. cap.<br>μF | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C mA | max. d.c. leakage current at UR after 1 min μA | max. tan δ | max. ESR Ω | max. impedance (Ω) at 10 kHz, at T <sub>amb</sub> = |        |        | case size* | catalogue number 2222 117 followed by |                |         |
|-----|-----------------|---|--|------------|------------|---|--------|--------|------------|---------------------------------------|----------------|---------|
|     |                 |   |  |            |            | 20 °C   | -25 °C | -40 °C |            | on reel style 1                       | in box style 1 | style 3 |
| 6,3 | 10              | 11  | 4  | 0,30       | 48         | 20  | 120    | 320    | 1a         | 23109                                 | 33109          | 83109   |
|     | 22              | 20  | 6  | 0,30       | 22         | 9   | 55     | 145    | 1          | 23229                                 | 33229          | 83229   |
| 10  | 6,8             | 10  | 4  | 0,25       | 59         | 24  | 110    | 294    | 1a         | 24688                                 | 34688          | 84688   |
|     | 15              | 18  | 6  | 0,25       | 27         | 11  | 50     | 133    | 1          | 24159                                 | 34159          | 84159   |
| 16  | 4,7             | 9   | 5  | 0,20       | 68         | 26  | 119    | 319    | 1a         | 25478                                 | 35478          | 85478   |
|     | 10              | 16  | 6  | 0,20       | 32         | 12  | 56     | 150    | 1          | 25109                                 | 35109          | 85109   |
| 25  | 3,3             | 8   | 5  | 0,18       | 87         | 27  | 121    | 333    | 1a         | 26338                                 | 36338          | 86338   |
|     | 6,8             | 14  | 6  | 0,18       | 42         | 13  | 59     | 162    | 1          | 26688                                 | 36688          | 86688   |
| 40  | 2,2             | 7   | 5  | 0,16       | 116        | 32  | 136    | 409    | 1a         | 27228                                 | 37228          | 87228   |
|     | 4,7             | 13  | 7  | 0,16       | 54         | 15  | 64     | 191    | 1          | 27478                                 | 37478          | 87478   |
| 63  | 0,1             | 2   | 4  | 0,10       | 1590       | 550   | 1800   | 5000   | 1a         | 28107                                 | 38107          | 88107   |
|     | 0,15            | 3   | 4  | 0,10       | 1060       | 367   | 1200   | 3330   | 1a         | 28157                                 | 38157          | 88157   |
|     | 0,22            | 3   | 4  | 0,10       | 723        | 250   | 818    | 2270   | 1a         | 28227                                 | 38227          | 88227   |
|     | 0,33            | 4   | 4  | 0,10       | 482        | 167   | 545    | 1520   | 1a         | 28337                                 | 38337          | 88337   |
|     | 0,47            | 4   | 4  | 0,10       | 339        | 117   | 383    | 1060   | 1a         | 28477                                 | 38477          | 88477   |
|     | 0,68            | 5   | 4  | 0,10       | 234        | 81  | 265    | 735    | 1a         | 28687                                 | 38687          | 88687   |
|     | 1               | 6   | 4  | 0,12       | 191        | 55  | 180    | 500    | 1a         | 28108                                 | 38108          | 88108   |
|     | 1,5             | 7   | 5  | 0,14       | 149        | 37  | 120    | 333    | 1a         | 28158                                 | 38158          | 88158   |
|     | 2,2             | 11  | 6  | 0,14       | 87         | 25  | 82     | 227    | 1          | 28228                                 | 38228          | 88228   |
|     | 3,3             | 13  | 7  | 0,14       | 68         | 17  | 55     | 152    | 1          | 28338                                 | 38338          | 88338   |

\* Case size 1a: φ 3,3 mm x 8 mm.  
Case size 1 : φ 3,3 mm x 11 mm.

**Capacitance**

Nominal capacitance at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

-10 to +50%  
(± 20% to special order)

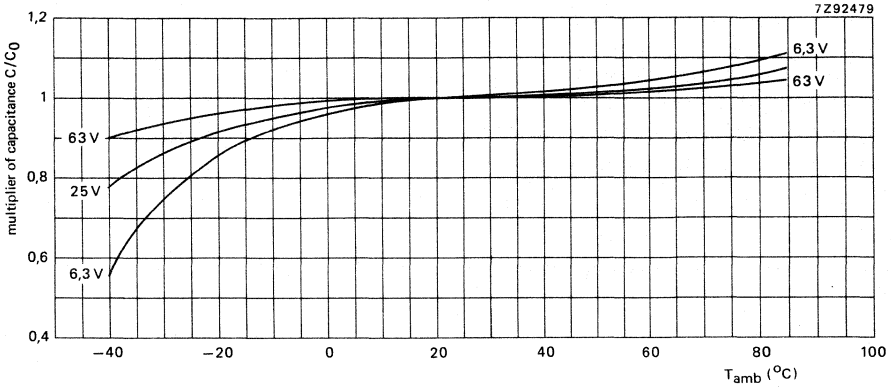


Fig. 3 Multiplier of capacitance as a function of ambient temperature;  $C_0$  = capacitance at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , 100 Hz.

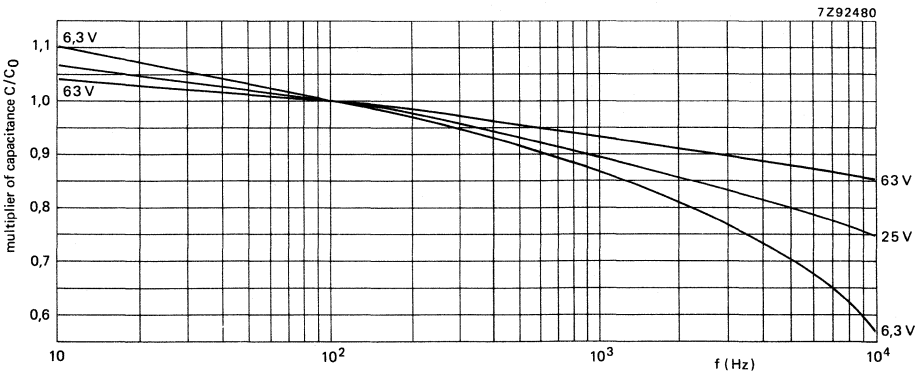


Fig. 4 Multiplier of capacitance as a function of frequency;  $C_0$  = capacitance at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

Rated voltage = max. permissible voltage

Ripple voltage\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage without d.c. voltage applied
- c) momentary value of applied voltage

Surge voltage = max. permissible voltage for short periods

Reverse voltage = max. d.c. voltage applied in the reverse polarity for short periods

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$

| core temperature <sup>▲</sup> |                                 |
|-------------------------------|---------------------------------|
| < 60 °C                       | 60 to 95 °C                     |
| 1,1 x U <sub>R</sub>          | U <sub>R</sub>                  |
| 1,1 x U <sub>R</sub>          | U <sub>R</sub>                  |
|                               | 2 V                             |
|                               | between U <sub>R</sub> and -2 V |
| 1,2 x U <sub>R</sub>          | 1,15 x U <sub>R</sub>           |
|                               | 2 V                             |

see Table 2

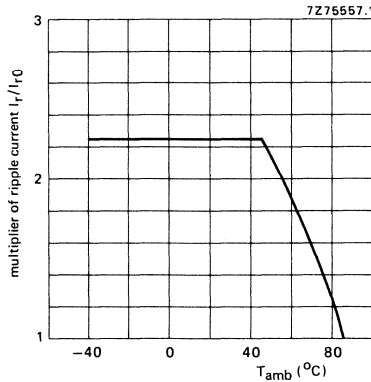


Fig. 5 Multiplier of ripple current as a function of ambient temperature; I<sub>r0</sub> = ripple current at T<sub>amb</sub> = 85 °C, 100 Hz.

▲ See Introduction, section 5, "Ripple current".

\* Specified ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

\*\* Specified ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.



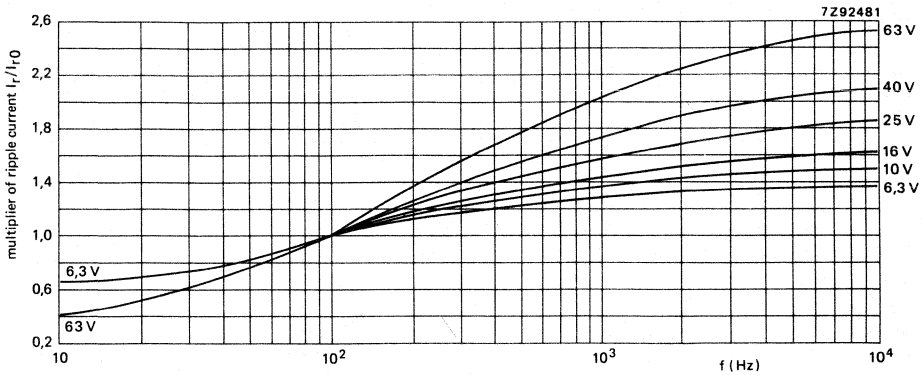


Fig. 6 Multiplier of ripple current as a function of frequency;  $I_{r0}$  = ripple current at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ , 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum \frac{I_n^2}{r_n} \leq I_{r\ max}^2$$

$I_{r\ max}$  = maximum ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n} = I_r/I_{r0}$  = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and Requirements).

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$   
at  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2 (0,02 CU + 3  $\mu\text{A}$ )

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^{\circ}\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20^\circ\text{C}$

see Table 2

Fig. 7 Typical tan  $\delta$  as a function of ambient temperature at 100 Hz.

- Curve 1 = 6,3 V;
- curve 2 = 10 V;
- curve 3 = 16 V;
- curve 4 = 25 V;
- curve 5 = 40 V;
- curve 6 = 1,5 to 3,3  $\mu\text{F}$ , 63 V;
- curve 7 = 0,68 and 1  $\mu\text{F}$ , 63 V;
- curve 8 = 0,22 to 0,47  $\mu\text{F}$ , 63 V;
- curve 9 = 0,1 and 0,15  $\mu\text{F}$ , 63 V.


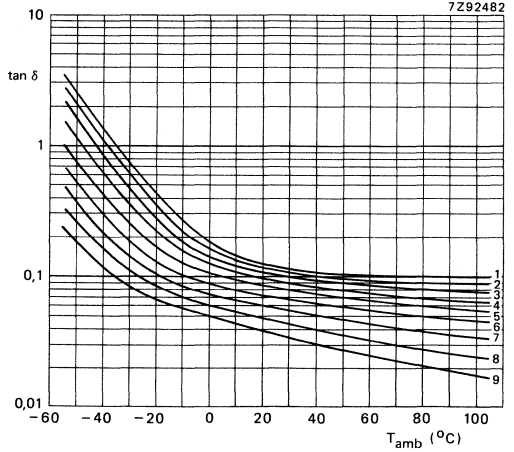


Fig. 8 Typical tan  $\delta$  as a function of frequency at  $T_{amb} = 20^\circ\text{C}$ .

- Curve 1 = 6,3 V;
- curve 2 = 10 V;
- curve 3 = 16 V;
- curve 4 = 25 V;
- curve 5 = 40 V;
- curve 6 = 1,5 to 3,3  $\mu\text{F}$ , 63 V;
- curve 7 = 0,68 and 1  $\mu\text{F}$ , 63 V;
- curve 8 = 0,22 to 0,47  $\mu\text{F}$ , 63 V;
- curve 9 = 0,1 and 0,15  $\mu\text{F}$ , 63 V.

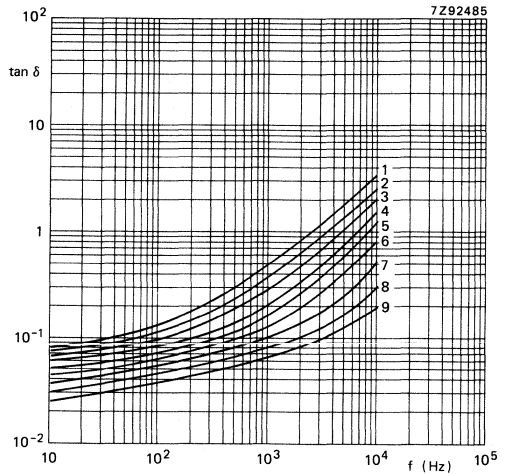

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2


**Impedance (Z)**

Maximum impedance at 10 kHz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ,  
 $-25\text{ }^{\circ}\text{C}$  and  $-40\text{ }^{\circ}\text{C}$ , measured by means of a  
 four-terminal circuit (Thomson circuit)

see Table 2

Fig. 9 Typical impedance as a function of ambient temperature at 10 kHz; case size 1a.

- Curve 1 = 0,1  $\mu\text{F}$ , 63 V;
- curve 2 = 0,15  $\mu\text{F}$ , 63 V;
- curve 3 = 0,22  $\mu\text{F}$ , 63 V;
- curve 4 = 0,33  $\mu\text{F}$ , 63 V;
- curve 5 = 0,47  $\mu\text{F}$ , 63 V;
- curve 6 = 0,68  $\mu\text{F}$ , 63 V;
- curve 7 = 1  $\mu\text{F}$ , 63 V;
- curve 8 = 1,5  $\mu\text{F}$ , 63 V;
- curve 9 = 2,2  $\mu\text{F}$ , 40 V;
- curve 10 = 3,3  $\mu\text{F}$ , 25 V;
- curve 11 = 4,7  $\mu\text{F}$ , 16 V;
- curve 12 = 6,8  $\mu\text{F}$ , 10 V;
- curve 13 = 10  $\mu\text{F}$ , 6,3 V.

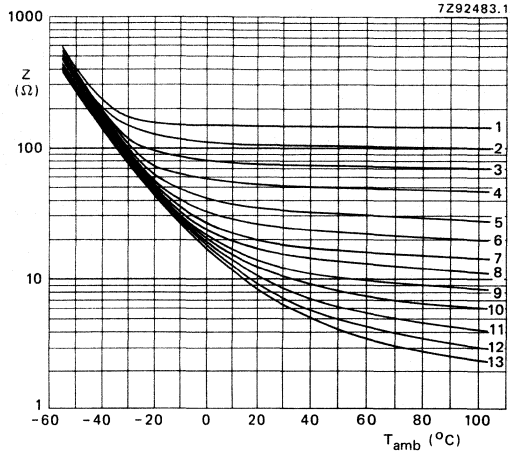

DEVELOPMENT DATA

Fig. 10 Typical impedance as a function of ambient temperature at 10 kHz; case size 1.

- Curve 1 = 2,2  $\mu\text{F}$ , 63 V;
- curve 2 = 3,3  $\mu\text{F}$ , 63 V;
- curve 3 = 4,7  $\mu\text{F}$ , 40 V;
- curve 4 = 6,8  $\mu\text{F}$ , 25 V;
- curve 5 = 10  $\mu\text{F}$ , 16 V;
- curve 6 = 15  $\mu\text{F}$ , 10 V;
- curve 7 = 22  $\mu\text{F}$ , 6,3 V.

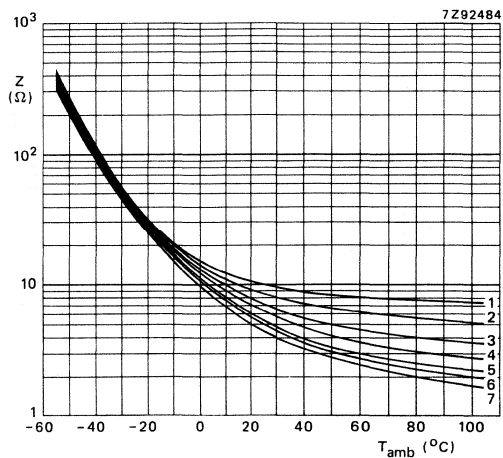


Fig. 11 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 1a.

- Curve 1 =  $0,1\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $0,22\text{ }\mu\text{F}$ , 63 V;
- curve 3 =  $0,47\text{ }\mu\text{F}$ , 63 V;
- curve 4 =  $1\text{ }\mu\text{F}$ , 63 V;
- curve 5 =  $2,2\text{ }\mu\text{F}$ , 40 V;
- curve 6 =  $4,7\text{ }\mu\text{F}$ , 16 V;
- curve 7 =  $10\text{ }\mu\text{F}$ , 6,3 V.


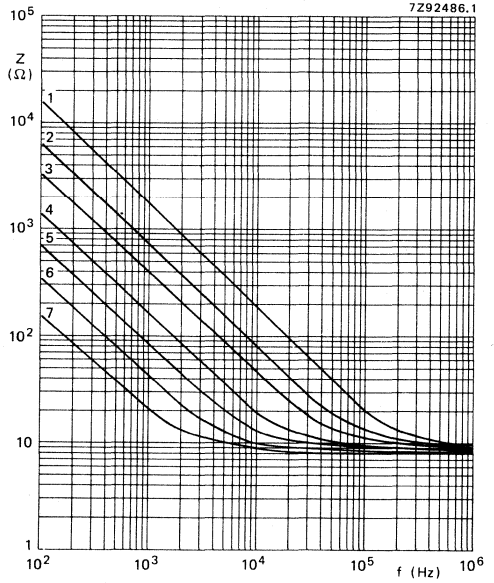


Fig. 12 Typical impedance as a function of frequency at  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ; case size 1.

- Curve 1 =  $2,2\text{ }\mu\text{F}$ , 63 V;
- curve 2 =  $3,3\text{ }\mu\text{F}$ , 63 V;
- curve 3 =  $4,7\text{ }\mu\text{F}$ , 40 V;
- curve 4 =  $6,8\text{ }\mu\text{F}$ , 25 V;
- curve 5 =  $10\text{ }\mu\text{F}$ , 16 V;
- curve 6 =  $15\text{ }\mu\text{F}$ , 10 V;
- curve 7 =  $22\text{ }\mu\text{F}$ , 6,3 V.

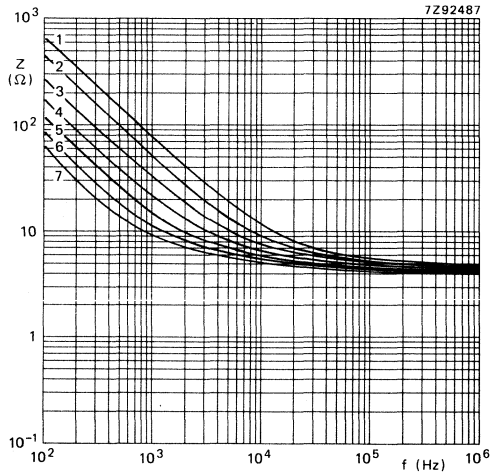

**Equivalent series inductance (ESL)**

case size 1a  
case size 1

typ. 13 nH  
typ. 15 nH

**OPERATIONAL DATA**

Category temperature range

-40 to + 85 °C

Typical life time

at  $T_{amb} = 40\text{ °C}$

50 000 h

at  $T_{amb} = 85\text{ °C}$

2000 h

Shelf life at 0 V and  $T_{amb} = 85\text{ °C}$

500 h

**PACKING**

Capacitors of style 3 are supplied in boxes; capacitors of style 1 are supplied on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 3.

**Table 3**

| case size | number of capacitors |                 |                 |
|-----------|----------------------|-----------------|-----------------|
|           | style 1 per reel     | style 1 per box | style 3 per box |
| 1a        | 4000                 | 1000            | 1000            |
| 1         | 4000                 | 1000            | 1000            |

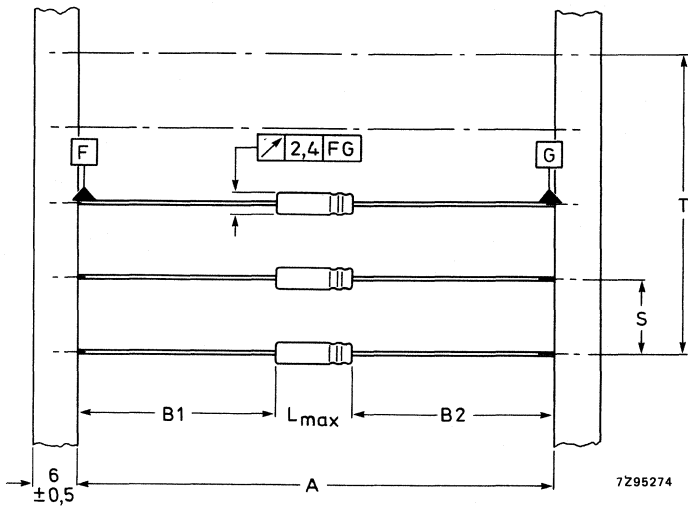


Fig. 13 Style 1 capacitors on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 4 for dimensions A, S, T and L.  
 $|B1 - B2| = \text{max. } 1,4 \text{ mm.}$

**Table 4** (Dimensions in mm)

| case size | A          | S       | T for number (n) of capacitors |              | L <sub>max</sub> |
|-----------|------------|---------|--------------------------------|--------------|------------------|
|           |            |         | n < 50                         | 50 < n < 100 |                  |
| → 1a      | 63,5 ± 1,5 | 5 ± 0,4 | 5(n-1) ± 2                     | 5(n-1) ± 4   | 9                |
| → 1       | 63,5 ± 1,5 | 5 ± 0,4 | 5(n-1) ± 2                     | 5(n-1) ± 4   | 12               |

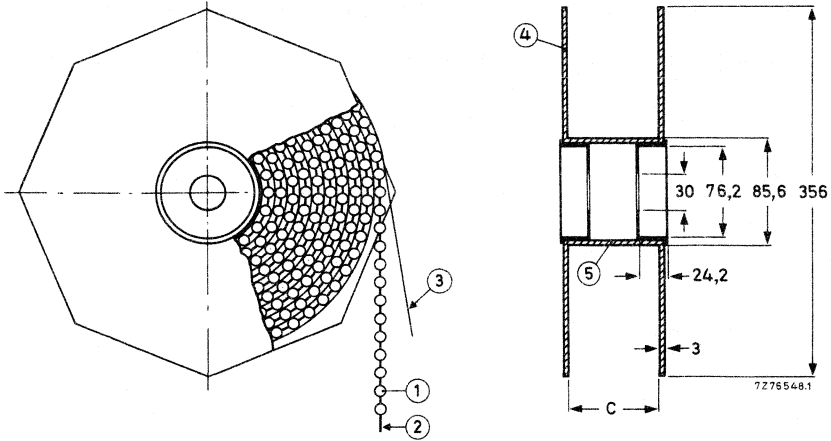


Fig. 14 Style 1 capacitors on bandoliers on reel; dimension C = 83,5 mm; the overall width of the reel is 94,5 mm.

- 1 = capacitor
- 2 = bandolier
- 3 = paper
- 4 = flange
- 5 = cylinder

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *endurance test, 1500 h, 85 °C*, the capacitors meet the following requirements:

- $\Delta C/C \leq \pm 20\%$ ,
- $\tan \delta \leq 200\%$  of specified value,
- d.c. leakage current  $\leq$  specified value.

After *shelf life test, 500 h, 85 °C*, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

Note: Capacitors 2222 117 are miniature types, general purpose grade.



DEVELOPMENT DATA





## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads
- Extended temperature range
- Very long life, high stability
- Very high CU-product per unit volume
- Industrial and military applications



### QUICK REFERENCE DATA

Nominal capacitance range (E6 series): 1 to 15 000  $\mu\text{F}$

Tolerance on nominal capacitance:  $\pm 20\%$

Rated voltage range,  $U_R$  (R5 series): 6,3 to 200 V

Category temperature range case sizes 4 to 7:  $-40$  to  $+125$   $^{\circ}\text{C}$   
 case sizes 00 to 05:  $-55$  to  $+125$   $^{\circ}\text{C}$

Endurance test at 125  $^{\circ}\text{C}$ , with max. ripple current: 2000 h  
 at 150  $^{\circ}\text{C}$ , without ripple current: 500 h

Shelf life at 0 V, 125  $^{\circ}\text{C}$ : 500 h

Basic specifications: IEC 384-4, long-life grade; DIN 41257; DIN 41240, type 1

Climatic category IEC 68, case sizes 4 to 7 40/125/56  
 case sizes 00 to 05 55/125/56

DIN 40040, case sizes 4 to 7 GKD \*  
 case sizes 00 to 05 FKD

Selection chart for  $C_{\text{nom}} \cdot U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |      |      |      |     |     |
|-----------------------------------|-----------|------|------|------|------|------|-----|-----|
|                                   | 6,3       | 10   | 16   | 25   | 40   | 63   | 100 | 200 |
| 1                                 |           |      |      |      |      | 4    |     |     |
| 1,5                               |           |      |      |      |      | 4    |     |     |
| 2,2                               |           |      |      |      |      | 4    |     |     |
| 3,3                               |           |      |      |      |      | 4    |     |     |
| 4,7                               |           |      |      |      |      | 4    |     |     |
| 6,8                               |           |      |      |      |      | 4    |     |     |
| 10                                |           |      |      |      |      | 4    |     |     |
| 15                                |           |      |      |      |      | 4    |     | 00  |
| 22                                |           |      |      |      |      | 4    |     | 01  |
| 33                                |           |      |      |      |      | 5    |     | 02  |
| 47                                |           |      |      |      | 4    | 5    | 00  | 03  |
| 68                                |           |      |      |      | 5    | 6    | 01  | 04  |
| 100                               |           |      |      | 4    | 5    | 7/00 | 01  | 05  |
| 150                               |           |      | 4    | 5    | 6    | 01   | 02  |     |
| 220                               |           | 4    | 5    | 6    | 7/00 | 01   | 03  |     |
| 330                               | 4         | 5    | 6    | 7    | 01   | 02   | 04  |     |
| 470                               |           | 6    | 6    | 7/00 | 01   | 03   | 05  |     |
| 680                               |           | 6    | 7/00 | 01   | 02   | 04   |     |     |
| 1 000                             | 6         | 7/00 | 01   | 01   | 03   | 05   |     |     |
| 1 500                             | 7/00      | 01   | 01   | 02   | 04   |      |     |     |
| 2 200                             | 01        | 01   | 02   | 03   | 05   |      |     |     |
| 3 300                             | 01        | 02   | 03   | 04   |      |      |     |     |
| 4 700                             | 02        | 03   | 04   | 05   |      |      |     |     |
| 6 800                             | 03        | 04   | 05   |      |      |      |     |     |
| 10 000                            | 04        | 05   |      |      |      |      |     |     |
| 15 000                            | 05        |      |      |      |      |      |     |     |

| case size | nominal dimensions (mm)      |           |
|-----------|------------------------------|-----------|
| 4         | $\varnothing 6,5 \times 18$  | miniature |
| 5         | $\varnothing 8 \times 18$    |           |
| 6         | $\varnothing 10 \times 18$   |           |
| 7         | $\varnothing 10 \times 25$   |           |
| 00        | $\varnothing 10 \times 30$   | small     |
| 01        | $\varnothing 12,5 \times 30$ |           |
| 02        | $\varnothing 15 \times 30$   |           |
| 03        | $\varnothing 18 \times 30$   |           |
| 04        | $\varnothing 18 \times 40$   |           |
| 05        | $\varnothing 21 \times 40$   |           |

Case sizes 4 to 7 (miniature types) are still under development; information on these capacitors are derived from development samples, and does not necessarily imply that they will go into regular production.

## APPLICATION

These capacitors are especially designed for those applications where extreme ambient temperatures exist. They are very suitable for applications where very high requirements have to be met concerning reliability and long lifetime over a wide temperature range, such as in automotive, computer, telecommunication and telephony equipment.

The high CU-product per unit volume offers additional advantages in applications where high requirements are imposed on size and mass, e.g. automotive equipment. They are mainly used for energy storage, smoothing, coupling and decoupling purposes, as well as for timing and delay circuits. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

## DESCRIPTION

The capacitors have deeply etched and oxidized aluminium foil electrodes rolled up with a porous paper spacer, which separates the anode and the cathode. The spacer is impregnated with an electrolyte which retains its good characteristics at extreme temperatures. The capacitors are housed in an aluminium case with axial soldered-copper terminations, sealed with a synthetic disc. The all-welded construction, the built-in voltage derating, and the close quality control during manufacture ensure a reliability and a life expectancy far superior to normal grade electrolytic capacitors.

The capacitors are available in 2 styles:

style 1 : axial leads, case insulated with a blue synthetic sleeve; all case sizes; case sizes 4 to 7 are supplied on bandoliers;

style 2 : single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes O2 to O5.

## MECHANICAL DATA

Dimensions in mm

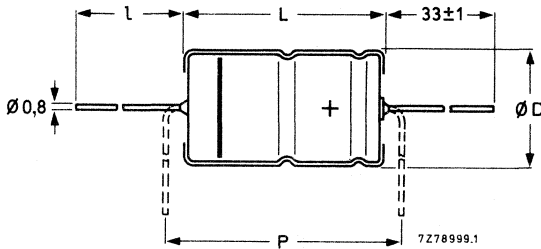


Fig. 1 Style 1; see Table 1a for dimensions D, L, I and P.

Table 1a

| case size | l      | style 1          |                  |                  |                  |                  | mass approx. g |
|-----------|--------|------------------|------------------|------------------|------------------|------------------|----------------|
|           |        | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> |                |
| 4         | *      | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | *      | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | *      | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | *      | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 55 ± 1 | 10,0             | 30,0             | 10,5             | 30,5             | 35,0             | 4,3            |
| 01        | 55 ± 1 | 12,5             | 30,0             | 13,0             | 30,5             | 35,0             | 6,6            |
| 02        | 55 ± 1 | 15,0             | 30,0             | 15,5             | 30,5             | 35,0             | 8,5            |
| 03        | 55 ± 1 | 18,0             | 30,0             | 18,5             | 30,5             | 35,0             | 11,2           |
| 04        | 34 ± 1 | 18,0             | 40,0             | 18,5             | 41,5             | 45,0             | 14             |
| 05        | 34 ± 1 | 21,0             | 40,0             | 21,5             | 41,5             | 45,0             | 19             |

\* Case sizes 4 to 7 are supplied on bandoliers in boxes or on reels (see Packing).

Table 1b

| case size | style 2        |                |                |                   |                |        | mass approx. g |
|-----------|----------------|----------------|----------------|-------------------|----------------|--------|----------------|
|           | d <sub>1</sub> | d <sub>2</sub> | D <sub>1</sub> | D <sub>2max</sub> | D <sub>3</sub> | L      |                |
| 02        | 0,8            | 1 + 0,1        | 15,0           | 17,5              | 16,5 ± 0,2     | 31 ± 1 | 8,6            |
| 03        | 0,8            | 1 + 0,1        | 18,0           | 19,5              | 18,5 ± 0,2     | 31 ± 1 | 11,5           |
| 04        | 1,0            | 1,3 + 0,1      | 18,0           | 19,5              | 18,5 ± 0,2     | 42 ± 1 | 14,5           |
| 05        | 1,0            | 1,3 + 0,1      | 21,0           | 22,5              | 21,5 ± 0,2     | 42 ± 1 | 19,7           |


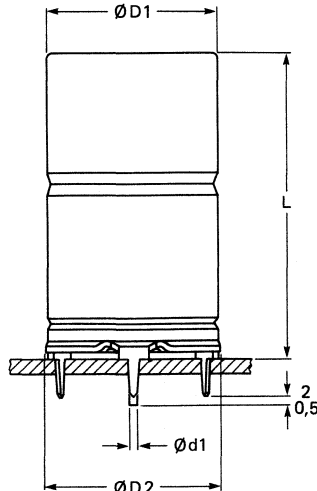



Fig. 2 Style 2; see Table 1b for dimensions d<sub>1</sub>, d<sub>2</sub>, D<sub>1</sub>, D<sub>2</sub>, D<sub>3</sub> and L.

**Marking**

The capacitors are marked with:  
nominal capacitance;  
tolerance on nominal capacitance according to IEC 62;  
rated voltage at 125 °C and 85 °C;  
group number 118;  
maximum temperature; grade reference LL;  
name of manufacturer; code of origin;  
date code (year and month) according to IEC 62;  
band to identify the negative terminal;  
+ signs to identify the positive terminal.

**Mounting**

The capacitors may be mounted in any position by their leads.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| $U_R$ | nom. cap.     | max. r.m.s. ripple current at $T_{amb} = 125\text{ °C}$ | max.d.c.leakage current at $U_R$ after 1 min | max. $\tan \delta$ | max. ESR | max. impedance at 10 kHz | case size | catalogue number*<br>2222 118 followed by |
|-------|---------------|---|--|--------------------|----------|--------------------------|-----------|---|
| V     | $\mu\text{F}$ | mA  | $\mu\text{A}$                                |                    | $\Omega$ | $\Omega$                 |           |   |
| 6,3   | 330           | 112   | 20   | 0,50               | 2,41     | 2,1                      | 4         | . 3331                                    |
|       | 1000          | 251   | 42   | 0,50               | 0,79     | 0,8                      | 6         | . 3102                                    |
|       | 1500          | 352   | 61   | 0,50               | 0,53     | 0,53                     | 7         | **  |
|       | 1500          | 416   | 61   | 0,46               | 0,485    | 0,45                     | 00        | . 3152                                    |
|       | 2200          | 590   | 87   | 0,46               | 0,305    | 0,28                     | 01        | . 3222                                    |
|       | 3300          | 648   | 129  | 0,58               | 0,280    | 0,27                     | 01        | . 3332                                    |
|       | 4700          | 826   | 182  | 0,58               | 0,185    | 0,18                     | 02        | . 3472                                    |
|       | 6800          | 1040  | 261  | 0,66               | 0,155    | 0,15                     | 03        | . 3682                                    |
|       | 10 000        | 1417  | 382  | 0,66               | 0,098    | 0,10                     | 04        | . 3103                                    |
|       | 15 000        | 1707  | 571  | 0,77               | 0,082    | 0,10                     | 05        | . 3153                                    |
| 10    | 220           | 109   | 20   | 0,35               | 2,53     | 2,1                      | 4         | . 4221                                    |
|       | 330           | 150   | 24   | 0,35               | 1,69     | 1,4                      | 5         | . 4331                                    |
|       | 470           | 179   | 32   | 0,35               | 1,19     | 1,0                      | 5         | . 4471                                    |
|       | 680           | 247   | 45   | 0,35               | 0,82     | 0,81                     | 6         | . 4681                                    |
|       | 1000          | 343   | 64   | 0,35               | 0,56     | 0,55                     | 7         | **  |
|       | 1000          | 409   | 64   | 0,32               | 0,505    | 0,45                     | 00        | . 4102                                    |
|       | 1500          | 590   | 94   | 0,32               | 0,285    | 0,28                     | 01        | . 4152                                    |
|       | 2200          | 634   | 136  | 0,40               | 0,290    | 0,27                     | 01        | . 4222                                    |
|       | 3300          | 826   | 202  | 0,40               | 0,190    | 0,18                     | 02        | . 4332                                    |
|       | 4700          | 1035  | 286  | 0,46               | 0,155    | 0,15                     | 03        | . 4472                                    |
|       | 6800          | 1395  | 412  | 0,53               | 0,100    | 0,10                     | 04        | . 4682                                    |
|       | 10 000        | 1674  | 604  | 0,53               | 0,084    | 0,10                     | 05        | . 4103                                    |
| 16    | 150           | 106   | 20   | 0,25               | 2,65     | 2,2                      | 4         | . 5151                                    |
|       | 220           | 145   | 25   | 0,25               | 1,81     | 1,5                      | 5         | . 5221                                    |
|       | 330           | 204   | 36   | 0,25               | 1,21     | 1,2                      | 6         | . 5331                                    |
|       | 470           | 243   | 49   | 0,25               | 0,85     | 0,83                     | 6         | . 5471                                    |
|       | 680           | 335   | 69   | 0,25               | 0,58     | 0,57                     | 7         | **  |
|       | 680           | 389   | 69   | 0,22               | 0,525    | 0,45                     | 00        | . 5681                                    |
|       | 1000          | 557   | 100  | 0,22               | 0,345    | 0,28                     | 01        | . 5102                                    |
|       | 1500          | 609   | 148  | 0,29               | 0,305    | 0,27                     | 01        | . 5152                                    |
|       | 2200          | 790   | 215  | 0,29               | 0,205    | 0,18                     | 02        | . 5222                                    |
|       | 3300          | 1008  | 321  | 0,34               | 0,165    | 0,15                     | 03        | . 5332                                    |
|       | 4700          | 1363  | 455  | 0,34               | 0,105    | 0,10                     | 04        | . 5472                                    |
|       | 6800          | 1627  | 657  | 0,38               | 0,088    | 0,10                     | 05        | . 5682                                    |

\* Replace dot in catalogue number by:

- 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel  
 3 for style 1 on bandoliers in box } case sizes 4 to 7  
 4 for style 2; case sizes 02 to 05.

\*\* See Table 3.

| $U_R$ | nom. cap.     | max. r.m.s. ripple current at $T_{amb} = 125\text{ }^\circ\text{C}$ | max.d.c.leakage current at $U_R$ after 1 min | max. tan $\delta$ | max. ESR | max. impedance at 10 kHz | case size | catalogue number* 2222 118 followed by |
|-------|---------------|---|--|-------------------|----------|--------------------------|-----------|--|
| V     | $\mu\text{F}$ | mA  | $\mu\text{A}$                                |                   | $\Omega$ | $\Omega$                 |           |  |
| 25    | 100           | 102   | 20   | 0,18              | 2,86     | 2,3                      | 4         | . 6101                                 |
|       | 150           | 141   | 27   | 0,18              | 1,91     | 1,55                     | 5         | . 6151                                 |
|       | 220           | 196   | 37   | 0,18              | 1,30     | 1,25                     | 6         | . 6221                                 |
|       | 330           | 274   | 54   | 0,18              | 0,87     | 0,82                     | 7         | . 6331                                 |
|       | 470           | 327   | 75   | 0,18              | 0,61     | 0,57                     | 7         | . **                                   |
|       | 470           | 366   | 75   | 0,18              | 0,62     | 0,50                     | 00        | . 6471                                 |
|       | 680           | 515   | 106  | 0,18              | 0,38     | 0,30                     | 01        | . 6681                                 |
|       | 1000          | 531   | 154  | 0,24              | 0,375    | 0,28                     | 01        | . 6102                                 |
|       | 1500          | 691   | 229  | 0,25              | 0,263    | 0,22                     | 02        | . 6152                                 |
|       | 2200          | 919   | 334  | 0,26              | 0,185    | 0,17                     | 03        | . 6222                                 |
|       | 3300          | 1280  | 499  | 0,26              | 0,120    | 0,11                     | 04        | . 6332                                 |
|       | 4700          | 1464  | 709  | 0,28              | 0,095    | 0,10                     | 05        | . 6472                                 |
|       | 40            | 47  | 89,8   | 20                | 0,11     | 3,72                     | 2,8       | 4                                      |
| 68    |               | 121   | 20   | 0,11              | 2,57     | 1,9                      | 5         | . 7689                                 |
| 100   |               | 147   | 28   | 0,11              | 1,75     | 1,3                      | 5         | . 7101                                 |
| 150   |               | 207   | 40   | 0,11              | 1,17     | 1,0                      | 6         | . 7151                                 |
| 220   |               | 287   | 57   | 0,11              | 0,80     | 0,68                     | 7         | . **                                   |
| 220   |               | 338   | 57   | 0,10              | 0,695    | 0,55                     | 00        | . 7221                                 |
| 330   |               | 484   | 83   | 0,10              | 0,430    | 0,33                     | 01        | . 7331                                 |
| 470   |               | 522   | 117  | 0,11              | 0,380    | 0,30                     | 01        | . 7471                                 |
| 680   |               | 695   | 167  | 0,11              | 0,255    | 0,23                     | 02        | . 7681                                 |
| 1000  |               | 852   | 244  | 0,13              | 0,205    | 0,18                     | 03        | . 7102                                 |
| 1500  |               | 1196  | 364  | 0,13              | 0,130    | 0,11                     | 04        | . 7152                                 |
| 2200  |               | 1403  | 532  | 0,15              | 0,105    | 0,10                     | 05        | . 7222                                 |
| 63    |               | 1   | 16,4   | 20                | 0,07     | 111                      | 22        | 4                                      |
|       | 1,5           | 20,1  | 20   | 0,07              | 74,3     | 18                       | 4         | . 8158                                 |
|       | 2,2           | 24,3  | 20   | 0,07              | 50,6     | 14,5                     | 4         | . 8228                                 |
|       | 3,3           | 29,8  | 20   | 0,07              | 33,8     | 11,2                     | 4         | . 8338                                 |
|       | 4,7           | 35,6  | 20   | 0,07              | 23,7     | 8,9                      | 4         | . 8478                                 |
|       | 6,8           | 42,8  | 20   | 0,07              | 16,4     | 7,2                      | 4         | . 8688                                 |
|       | 10            | 51,9  | 20   | 0,07              | 11,1     | 5,6                      | 4         | . 8109                                 |
|       | 15            | 63,6  | 20   | 0,07              | 7,43     | 4,2                      | 4         | . 8159                                 |
|       | 22            | 77,0  | 20   | 0,07              | 5,06     | 3,2                      | 4         | . 8229                                 |
|       | 33            | 106   | 20   | 0,07              | 3,38     | 2,1                      | 5         | . 8339                                 |
|       | 47            | 126   | 22   | 0,07              | 2,37     | 1,5                      | 5         | . 8479                                 |
|       | 68            | 175   | 30   | 0,07              | 1,64     | 1,05                     | 6         | . 8689                                 |
|       | 100           | 243   | 42   | 0,07              | 1,14     | 0,7                      | 7         | . **                                   |
|       | 100           | 262   | 42   | 0,07              | 1,15     | 1,0                      | 00        | . 8101                                 |
|       | 150           | 415   | 61   | 0,07              | 0,645    | 0,61                     | 01        | . 8151                                 |
|       | 220           | 454   | 87   | 0,08              | 0,610    | 0,56                     | 01        | . 8221                                 |
|       | 330           | 544   | 129  | 0,09              | 0,420    | 0,40                     | 02        | . 8331                                 |
|       | 470           | 695   | 182  | 0,09              | 0,310    | 0,33                     | 03        | . 8471                                 |
|       | 680           | 971   | 261  | 0,09              | 0,195    | 0,18                     | 04        | . 8681                                 |
| 1000  | 1161          | 382   | 0,10   | 0,160             | 0,15     | 05                       | . 8102    |  |

\* See note on the next page.

\*\* See Table 3.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 125 °C | max.d.c.leakage current at U <sub>R</sub> after 1 min | max. tan δ | max. ESR | max. impedance at 10 kHz | case size | catalogue number*<br>2222 118 followed by |
|----------------|-----------|---|---|------------|----------|--------------------------|-----------|---|
| V              | μF        | mA  | μA  |            | Ω        | Ω                        |           |   |
| 100            | 47        | 178   | 33  | 0,08       | 2,60     | 2,0                      | 00        | . 9479                                    |
|                | 68        | 278   | 45  | 0,08       | 1,78     | 1,2                      | 01        | . 9689                                    |
|                | 100       | 303   | 64  | 0,09       | 1,37     | 1,15                     | 01        | . 9101                                    |
|                | 150       | 368   | 94  | 0,10       | 0,94     | 0,78                     | 02        | . 9151                                    |
|                | 220       | 481   | 136   | 0,10       | 0,66     | 0,55                     | 03        | . 9221                                    |
|                | 330       | 644   | 202   | 0,10       | 0,45     | 0,37                     | 04        | . 9331                                    |
|                | 470       | 833   | 282   | 0,10       | 0,33     | 0,28                     | 05        | . 9471                                    |
| 200            | 15        | 129   | 22  | 0,046      | 4,76     | 3,75                     | 00        | 92159                                     |
|                | 22        | 198   | 31  | 0,046      | 3,17     | 2,22                     | 01        | 92229                                     |
|                | 33        | 242   | 44  | 0,046      | 2,11     | 1,11                     | 02        | **  |
|                | 47        | 317   | 61  | 0,046      | 1,48     | 0,60                     | 03        | **  |
|                | 68        | 428   | 86  | 0,046      | 1,02     | 0,42                     | 04        | **  |
|                | 100       | 551   | 124   | 0,046      | 0,96     | 0,39                     | 05        | **  |

Table 3

| U <sub>R</sub> | nom. cap. μF | case size | catalogue number                 |                                 |
|----------------|--------------|-----------|----------------------------------|---------------------------------|
|                |              |           | capacitors on bandoliers on reel | capacitors on bandoliers in box |
| 6,3            | 1500         | 7         | 2222 118 90502                   | 2222 118 90503                  |
| 10             | 1000         | 7         | 90504                            | 90505                           |
| 16             | 680          | 7         | 90506                            | 90507                           |
| 25             | 470          | 7         | 90508                            | 90509                           |
| 40             | 220          | 7         | 90511                            | 90512                           |
| 63             | 100          | 7         | 90513                            | 90514                           |

Table 4

| U <sub>R</sub> | nom. cap. μF | case size | catalogue number |                |
|----------------|--------------|-----------|------------------|----------------|
|                |              |           | style 1          | style 2        |
| 200            | 33           | 02        | 2222 118 92339   | 2222 118 90002 |
|                | 47           | 03        | 92479            | 90003          |
|                | 68           | 04        | 92689            | 90004          |
|                | 100          | 05        | 92101            | 90005          |

\* Replace dot in catalogue number by:  
 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel } case sizes 4 to 7  
 3 for style 1 on bandoliers in box }  
 4 for style 2; case sizes 02 to 05.

\*\* See Table 4.





**D.C. leakage current**

Maximum d.c. leakage current 1 min after application

of  $U_R$  at  $T_{amb} = 25\text{ }^\circ\text{C}$  see Table 2 (0,006 CU + 4  $\mu\text{A}$  or 20  $\mu\text{A}$ , whichever is greater)

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$ ,  
measured by a four-terminal circuit  
(Thomson circuit)

see Table 2

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 20\text{ }^\circ\text{C}$ ,  
measured by a four-terminal circuit  
(Thomson circuit)

see Table 2

**Impedance**

Maximum impedance at 10 kHz,  
measured by a four-terminal circuit  
(Thomson circuit)

see Table 2

**Equivalent series inductance (ESL)**

|                            |            |
|----------------------------|------------|
| Case size 4                | typ. 25 nH |
| Case size 5                | typ. 40 nH |
| Case sizes 6, 7, 00 and 01 | typ. 50 nH |
| Case size 02               | typ. 55 nH |
| Case sizes 03, 04 and 05   | typ. 60 nH |

**OPERATIONAL DATA**

Category temperature range

|                     |                                       |
|---------------------|---------------------------------------|
| case sizes 4 to 7   | $-40$ to $+125\text{ }^\circ\text{C}$ |
| case sizes 00 to 05 | $-55$ to $+125\text{ }^\circ\text{C}$ |

Typical life time, at max. ripple current according to Table 2

|  |                              |
|--|------------------------------|
| at $T_{amb} = 40\text{ }^\circ\text{C}$  | 450 000 h (approx. 50 years) |
| at $T_{amb} = 85\text{ }^\circ\text{C}$  | 20 000 h                     |
| at $T_{amb} = 125\text{ }^\circ\text{C}$ | 3000 h                       |

Shelf life at 0 V and  $T_{amb} = 125\text{ }^\circ\text{C}$

500 h

**PACKING**

All capacitors are supplied in boxes, except case sizes 4 to 7 of style 1, which are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 6.

**Table 6**

| case size | number of capacitors per box or per reel |
|-----------|--|
| 4         | 1000                                     |
| 5         | 500                                      |
| 6         | 500                                      |
| 7         | 500                                      |
| 00        | 200                                      |
| 01        | 200                                      |
| 02        | 200                                      |
| 03        | 200                                      |
| 04        | 100                                      |
| 05        | 100                                      |

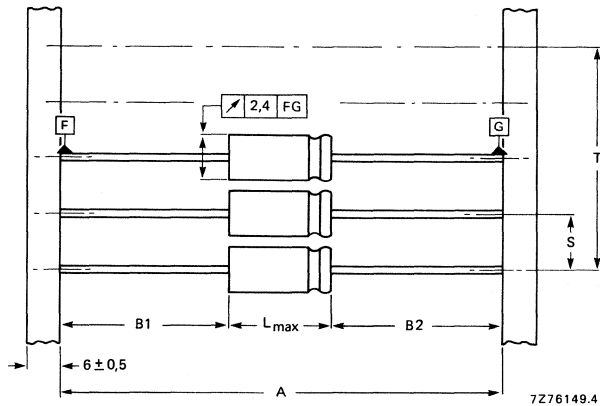


Fig. 3 Capacitors (case sizes 4 to 7) on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 7 for dimensions A, S, T and  $L_{max}$ .  $|B1 - B2| = 1,4 + (L_{max} - L)$  mm max.

**Table 7**

Dimensions in mm

| case size | A            | S             | T for number (n) of capacitors |                  |      |
|-----------|--------------|---------------|--------------------------------|------------------|------|
|           |              |               | $n \leq 50$                    | $50 < n < 100$   |      |
| 4         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5 |
| 5         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5 |
| 6         | $73 \pm 1,6$ | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 18,5 |
| 7         | $73 \pm 1,6$ | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 25,0 |

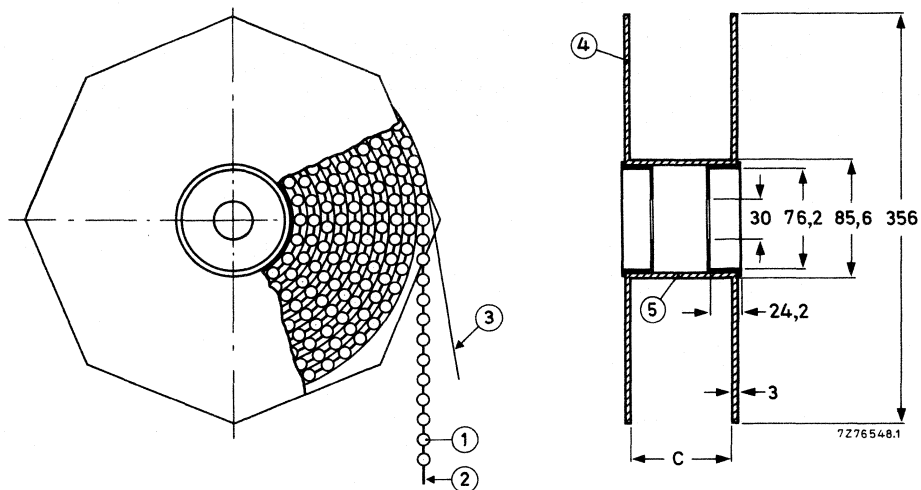


Fig. 4 Capacitors (case sizes 4 to 7) on bandoliers on reel; dimension C is 88,5 mm; the overall width of the reel is 99,5 mm.

1 = capacitor  
2 = bandolier

3 = paper  
4 = flange

5 = cylinder

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the following addition.

After *shelf life test, 500 h, 125 °C*, the capacitors meet the same requirements as after endurance test, except for d.c. leakage current:  $\leq 200\%$  of specified value. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

After *reverse voltage test, 125 °C (IEC 384-4, sub clause 9.16)*, the capacitors meet the following requirements:

d.c. leakage current  $\leq$  stated limit,  
 $\tan \delta$   $\leq$  stated limit,  
 $\Delta C/C$   $\leq 20\%$



### Note

Capacitors 2222 118 are miniature and small types, long-life grade.



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Miniature and small types
- Axial leads
- Long life
- Industrial applications



### QUICK REFERENCE DATA

|   |  |
|---|--|
| Nominal capacitance range (E6 series)                         | 1 to 4700 $\mu\text{F}$  |
| Tolerance on nominal capacitance                              | -10 to +50%  |
| Rated voltage, $U_R$ (R5 series)                              | 10 to 350 V  |
| Category temperature range                                    |  |
| case sizes 4 to 7   | -40 to +85 $^{\circ}\text{C}$  |
| case sizes 00 to 05 ( $U_R \leq 100$ V)                       | -55 to +85 $^{\circ}\text{C}$  |
| case sizes 00 to 05 ( $U_R \geq 160$ V)                       | -40 to +85 $^{\circ}\text{C}$  |
| Endurance test at 85 $^{\circ}\text{C}$                       |  |
| case sizes 4 and 5  | 6000 h   |
| case sizes 6 to 05  | 8000 h   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$ (case sizes 5 to 05) | 500 h  |
| Basic specifications  | IEC 384-4, long-life grade<br>DIN 41257<br>UTE C031/C033 (case sizes 00 to 05) |
| Climatic category   | IEC 68   |
| case sizes 4 to 7   | 40/085/56  |
| case sizes 00 to 05 ( $U_R \leq 100$ V)                       | 55/085/56  |
| case sizes 00 to 05 ( $U_R \geq 160$ V)                       | 40/085/56  |
|   | DIN 40040  |
|   | GPF  |
|   | FPF  |
|   | GPF  |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |      |      |     |      |     |     |
|-----------------------------------|-----------|------|------|------|------|-----|------|-----|-----|
|                                   | 10        | 16   | 25   | 40   | 63   | 100 | 160  | 250 | 350 |
| 1                                 |           |      |      |      |      | 4   |      |     | 4   |
| 1.5                               |           |      |      |      |      | 4   |      | 4   | 5   |
| 2.2                               |           |      |      |      |      | 4   | 4    | 5   | 5   |
| 3.3                               |           |      |      |      |      | 4   | 4    | 5   | 6   |
| 4.7                               |           |      |      |      | 4    | 4   | 5    | 6   | 6   |
| 6.8                               |           |      |      |      | 4    | 5   | 6    | 7   |     |
| 10                                |           |      |      |      | 4    | 5   | 6    | 7   | 01  |
| 15                                |           |      |      | 4    | 5    | 6   | 7    |     |     |
| 22                                |           |      | 4    | 5    | 6    | 7   | 7/00 | 01  | 02  |
| 33                                |           |      | 4    | 5    | 6    | 7   |      |     |     |
| 47                                | 4         |      | 5    | 6    | 7/00 | 02  | 03   | 04  |     |
| 68                                | 4         | 5    | 6    | 7/00 | 01   |     |      |     |     |
| 100                               | 5         |      | 6    | 00   | 02   | 03  | 05   |     |     |
| 150                               | 5         | 6    | 7/01 | 02   | 03   |     |      |     |     |
| 220                               | 5         | 6    | 7/01 | 01   | 02   | 04  | 05   |     |     |
| 330                               |           | 7/01 | 01   | 02   | 03   | 04  |      |     |     |
| 470                               | 01        | 7/01 | 01   | 02   | 04   | 05  |      |     |     |
| 680                               | 01        | 02   | 03   | 03   | 05   |     |      |     |     |
| 1000                              | 02        | 02   | 03   | 04   | 05   |     |      |     |     |
| 1500                              | 03        | 03   | 04   | 05   |      |     |      |     |     |
| 2200                              | 03        | 04   | 05   |      |      |     |      |     |     |
| 3300                              | 04        | 05   |      |      |      |     |      |     |     |
| 4700                              | 05        | 05   |      |      |      |     |      |     |     |

| case size | nominal dimensions (mm) |           |
|-----------|-------------------------|-----------|
| 4         | $\varnothing$ 6,5 x 18  | miniature |
| 5         | $\varnothing$ 8 x 18    |           |
| 6         | $\varnothing$ 10 x 18   |           |
| 7         | $\varnothing$ 10 x 25   |           |
| 00        | $\varnothing$ 10 x 30   | small     |
| 01        | $\varnothing$ 12,5 x 30 |           |
| 02        | $\varnothing$ 15 x 30   |           |
| 03        | $\varnothing$ 18 x 30   |           |
| 04        | $\varnothing$ 18 x 40   |           |
| 05        | $\varnothing$ 21 x 40   |           |

\* Case sizes 4 to 7 ( $U_R \geq 160$  V) are still under development; information on these capacitors is derived from development samples, and may change in any manner without notice.

**APPLICATION**

These capacitors are especially designed for those applications where extreme requirements have to be met concerning reliability and long lifetime both at high and low temperatures, such as in computer, telecommunication and telephony equipment.

They are mainly used for energy storage, smoothing, coupling and decoupling purposes, as well as for timing and delay circuits. The bandoliered version is extremely suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have etched and oxidized aluminium foil electrodes rolled up with a porous paper spacer, which separates the anode and the cathode. The spacer is impregnated with an electrolyte which retains its good characteristics both at low and high temperatures. The capacitors are housed in an aluminium case with axial soldered-copper terminations, sealed with a synthetic disc. The all-welded construction, the built-in voltage derating, and the close quality control, during manufacture ensure a reliability and a life expectancy far superior to normal grade electrolytic capacitors.

The capacitors are available in 2 styles:

style 1: axial leads, case insulated with a blue synthetic sleeve; all case sizes; case sizes 4 to 7 are supplied on bandoliers;

style 2: single ended; with mounting ring with printed-wiring pins; especially for use in applications with severe shocks and vibrations; case sizes 02 to 05.

**MECHANICAL DATA**

Dimensions in mm

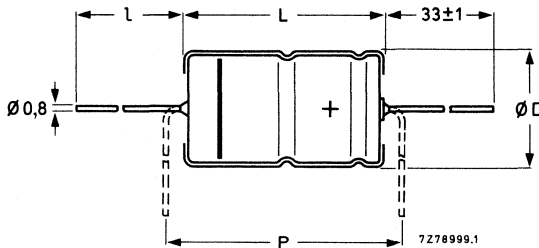


Fig. 1a See Table 1a for dimensions D, L, l and P.

**Table 1a**

| case size | l      | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> | mass approx. g |
|-----------|--------|------------------|------------------|------------------|------------------|------------------|----------------|
| 4         | *      | 6,5              | 18,0             | 6,9              | 18,5             | 25               | 1,3            |
| 5         | *      | 8,0              | 18,0             | 8,5              | 18,5             | 25               | 1,7            |
| 6         | *      | 10,0             | 18,0             | 10,5             | 18,5             | 25               | 2,5            |
| 7         | *      | 10,0             | 25,0             | 10,5             | 25,0             | 30               | 3,3            |
| 00        | 55 ± 1 | 10,0             | 30,0             | 10,5             | 30,5             | 35,0             | 4,3            |
| 01        | 55 ± 1 | 12,5             | 30,0             | 13,0             | 30,5             | 35,0             | 6,6            |
| 02        | 55 ± 1 | 15,0             | 30,0             | 15,5             | 30,5             | 35,0             | 8,5            |
| 03        | 55 ± 1 | 18,0             | 30,0             | 18,5             | 30,5             | 35,0             | 11,2           |
| 04        | 34 ± 1 | 18,0             | 40,0             | 18,5             | 41,5             | 45,0             | 14             |
| 05        | 34 ± 1 | 21,0             | 40,0             | 21,5             | 41,5             | 45,0             | 19             |

\* Case sizes 4 to 7 are supplied on bandoliers in boxes or on reels (see Packing).

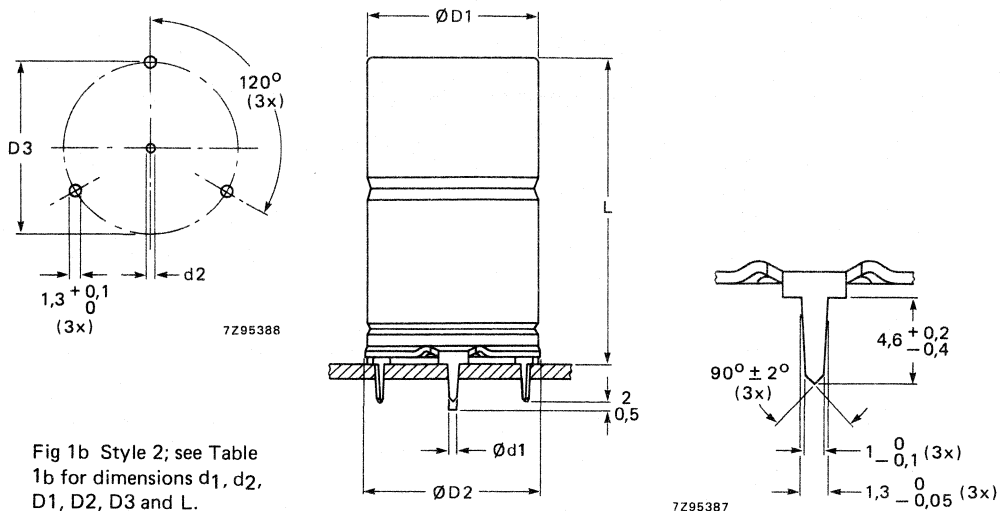


Fig 1b Style 2; see Table 1b for dimensions  $d_1$ ,  $d_2$ ,  $D_1$ ,  $D_2$ ,  $D_3$  and  $L$ .

Table 1b

| case size | style 2 |           |       |            |            |        | mass approx. g |
|-----------|---------|-----------|-------|------------|------------|--------|----------------|
|           | $d_1$   | $d_2$     | $D_1$ | $D_{2max}$ | $D_3$      | $L$    |                |
| 02        | 0,8     | 1 + 0,1   | 15,0  | 17,5       | 16,5 ± 0,2 | 31 ± 1 | 8,6            |
| 03        | 0,8     | 1 + 0,1   | 18,0  | 19,5       | 18,5 ± 0,2 | 31 ± 1 | 11,5           |
| 04        | 1,0     | 1,3 + 0,1 | 18,0  | 19,5       | 18,5 ± 0,2 | 42 ± 1 | 14,5           |
| 05        | 1,0     | 1,3 + 0,1 | 21,0  | 22,5       | 21,5 ± 0,2 | 42 ± 1 | 19,7           |

### Marking

The capacitors are marked with:

- nominal capacitance;
- tolerance on nominal capacitance according to IEC 62;
- rated voltage;
- group number 132 or 133;
- maximum temperature; grade reference LL;
- name of manufacturer; code of origin;
- date code (year and month) according to IEC 62;
- band to identify the negative terminal;
- + signs to identify the positive terminal.

### Mounting

The capacitors may be mounted in any position by their leads (see also Tests and Requirements in the Introduction).

### Minimum atmospheric pressure

8,5 kPa

### PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

**Table 2**

Unless otherwise specified all electrical values apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C | max.d.c.leakage current at U <sub>R</sub> after 5 min | max. tan δ | max. ESR | max. impedance Ω |            | case size | catalogue number*<br>2222<br>followed by |
|----------------|-----------|--|---|------------|----------|------------------|------------|-----------|--|
|                |           |  |   |            |          | at 10 kHz        | at 100 kHz |           |  |
| V              | μF        | mA   | μA  |            | Ω ·      |                  |            |           |  |
| 10             | 220       | 190  | 8,4   | 0,18       |          | 0,73             | 0,70       | 5         | 132 . 4221                               |
|                | 470       | 350  | 9,4   | 0,18       | 0,77     | 0,26             | 0,60       | 01        | 132 . 4471                               |
|                | 680       | 460  | 13,6  | 0,18       | 0,53     | 0,20             | 0,40       | 01        | 132 . 4681                               |
|                | 1000      | 640  | 20  | 0,18       | 0,36     | 0,12             |            | 02        | 132 . 4102                               |
|                | 1500      | 800  | 30  | 0,22       | 0,29     | 0,10             |            | 03        | 132 . 4152                               |
|                | 2200      | 1100   | 44  | 0,22       | 0,20     | 0,09             |            | 03        | 132 . 4222                               |
|                | 3300      | 1300   | 66  | 0,27       | 0,16     | 0,05             |            | 04        | 132 . 4332                               |
|                | 4700      | 1800   | 94  | 0,27       | 0,12     | 0,05             |            | 05        | 132 . 4472                               |
|                | 16        | 47   | 95  | 5,5        | 0,14     |                  | 2,6        | 2,2       | 4  |
| 68             |           | 110  | 6,2   | 0,14       |          | 1,8              | 1,6        | 4         | 132 . 5689                               |
| 100            |           | 150  | 7,2   | 0,14       |          | 1,2              | 1,1        | 5         | 132 . 5101                               |
| 150            |           | 190  | 8,8   | 0,14       |          | 0,80             | 0,80       | 5         | 132 . 5151                               |
| 220            |           | 250  | 11  | 0,14       |          | 0,55             | 0,55       | 6         | 132 . 5221                               |
| 330            |           | 320  | 14,6  | 0,14       |          | 0,36             | 0,36       | 7         | **                                       |
| 330            |           | 320  | 10,6  | 0,14       | 0,80     | 0,36             | 0,60       | 01        | 132 . 5331                               |
| 470            |           | 450  | 19  | 0,14       | 0,55     | 0,26             | 0,26       | 7         | **                                       |
| 470            |           | 450  | 15  | 0,14       | 0,55     | 0,26             | 0,40       | 01        | 132 . 5471                               |
| 680            |           | 550  | 22  | 0,14       | 0,39     | 0,14             |            | 02        | 132 . 5681                               |
| 1000           |           | 780  | 32  | 0,14       | 0,26     | 0,12             |            | 02        | 132 . 5102                               |
| 1500           |           | 950  | 48  | 0,15       | 0,19     | 0,10             |            | 03        | 132 . 5152                               |
| 2200           |           | 1300   | 70  | 0,15       | 0,12     | 0,06             |            | 04        | 132 . 5222                               |
| 3300           |           | 1600   | 106   | 0,15       | 0,09     | 0,05             |            | 05        | 132 . 5332                               |
| 4700           |           | 2300   | 150   | 0,15       | 0,08     | 0,05             |            | 05        | 132 . 5472                               |
| 25             | 22        | 60   | 5,1   | 0,11       |          | 4,1              | 2,9        | 4         | 132 . 6229                               |
|                | 33        | 80   | 5,7   | 0,11       |          | 2,7              | 2,3        | 4         | 132 . 6339                               |
|                | 68        | 140  | 7,4   | 0,11       |          | 1,3              | 1,1        | 5         | 132 . 6689                               |
|                | 150       | 230  | 11,5  | 0,11       |          | 0,60             | 0,60       | 6         | 132 . 6151                               |
|                | 220       | 340  | 15  | 0,11       |          | 0,40             | 0,40       | 7         | **                                       |
|                | 220       | 340  | 11  | 0,11       | 1,0      | 0,40             | 0,60       | 01        | 132 . 6221                               |
|                | 330       | 410  | 16,5  | 0,11       | 0,63     | 0,30             | 0,40       | 01        | 132 . 6331                               |
|                | 470       | 560  | 24  | 0,11       | 0,47     | 0,20             |            | 01        | 132 . 6471                               |
|                | 680       | 700  | 34  | 0,11       | 0,32     | 0,10             |            | 03        | 132 . 6681                               |
|                | 1000      | 1000   | 50  | 0,11       | 0,22     | 0,10             |            | 03        | 132 . 6102                               |
|                | 1500      | 1100   | 75  | 0,12       | 0,16     | 0,06             |            | 04        | 132 . 6152                               |
|                | 2200      | 1850   | 110   | 0,13       | 0,12     | 0,05             |            | 05        | 132 . 6222                               |

\* Replace dot in catalogue number by:  
 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel  
 3 for style 1 on bandoliers in box } case sizes 4 to 7  
 4 for style 2; case sizes 02 to 05.

\*\* See Table 3.



| U <sub>R</sub> | nom. cap.<br>μF | max. r.m.s. ripple current<br>at T <sub>amb</sub> = 85 °C<br>mA | max.d.c.leakage current at U <sub>R</sub><br>after 5 min<br>μA | max. tan δ | max. ESR<br>Ω | max. impedance<br>Ω |            | case size  | catalogue number*<br>2222<br>followed by |
|----------------|-----------------|---|--|------------|---------------|---------------------|------------|------------|--|
|                |                 |   |  |            |               | at 10 kHz           | at 100 kHz |            |  |
| 40             | 15              | 60  | 5,2  | 0,09       |               | 5                   | 3,2        | 4          | 132 . 7159                               |
|                | 33              | 100   | 6,6  | 0,09       |               | 2,3                 | 1,9        | 5          | 132 . 7339                               |
|                | 47              | 120   | 7,8  | 0,09       |               | 1,6                 | 1,4        | 5          | 132 . 7479                               |
|                | 68              | 170   | 9,4  | 0,09       |               | 1,1                 | 1,0        | 6          | 132 . 7689                               |
|                | 100             | 210   | 12   | 0,09       |               | 0,75                | 0,75       | 6          | 132 . 7101                               |
|                | 150             | 310   | 16   | 0,09       |               | 0,50                | 0,50       | 7          | **                                       |
|                | 150             | 310   | 12   | 0,09       | 1,27          | 0,50                | 0,60       | 01         | 132 . 7151                               |
|                | 220             | 410   | 17,5   | 0,09       | 0,86          | 0,34                | 0,40       | 01         | 132 . 7221                               |
|                | 330             | 550   | 26   | 0,09       | 0,58          | 0,20                |            | 02         | 132 . 7331                               |
|                | 470             | 700   | 38   | 0,09       | 0,40          | 0,16                |            | 02         | 132 . 7471                               |
|                | 680             | 900   | 54   | 0,09       | 0,28          | 0,10                |            | 03         | 132 . 7681                               |
|                | 1000            | 1200  | 80   | 0,09       | 0,19          | 0,08                |            | 04         | 132 . 7102                               |
|                | 1500            | 1500  | 120  | 0,10       | 0,14          | 0,06                |            | 05         | 132 . 7152                               |
|                | 2200            | 1900  | 176  | 0,10       | 0,10          | 0,05                |            | 05         | 132 . 7222                               |
|                | 63              | 4,7   | 38   | 4,6        | 0,07          |                     | 12         | 5          | 4  |
| 6,8            |                 | 45  | 4,9  | 0,07       |               | 8,1                 | 4          | 4          | 132 . 8688                               |
| 10             |                 | 64  | 5,3  | 0,07       |               | 5,5                 | 3,3        | 4          | 132 . 8109                               |
| 15             |                 | 80  | 5,9  | 0,07       |               | 3,7                 | 2,5        | 5          | 132 . 8159                               |
| 22             |                 | 100   | 6,8  | 0,07       |               | 2,5                 | 2,1        | 5          | 132 . 8229                               |
| 33             |                 | 140   | 8,2  | 0,07       |               | 1,7                 | 1,5        | 6          | 132 . 8339                               |
| 47             |                 | 170   | 9,9  | 0,07       |               | 1,2                 | 1,1        | 6          | 132 . 8479                               |
| 68             |                 | 210   | 12,6   | 0,07       |               | 0,81                | 0,60       | 7          | **                                       |
| 68             |                 | 210   | 8,6  | 0,07       | 1,9           | 0,80                | 0,60       | 00         | 132 . 8689                               |
| 100            |                 | 300   | 12,6   | 0,07       | 1,3           | 0,60                | 0,40       | 00         | 132 . 8101                               |
| 150            |                 | 350   | 19   | 0,07       | 0,87          | 0,37                |            | 02         | 132 . 8151                               |
| 220            |                 | 520   | 28   | 0,07       | 0,58          | 0,25                |            | 02         | 132 . 8221                               |
| 330            |                 | 600   | 42   | 0,07       | 0,40          | 0,15                |            | 03         | 132 . 8331                               |
| 470            |                 | 970   | 59   | 0,07       | 0,27          | 0,12                |            | 04         | 132 . 8471                               |
| 680            |                 | 1000  | 86   | 0,07       | 0,19          | 0,08                |            | 05         | 132 . 8681                               |
| 1000           | 1600            | 126   | 0,07   | 0,13       | 0,06          |                     | 05         | 132 . 8102 |  |
| 100            | 1               | 20  | 4,2  | 0,06       |               | 45                  | 6          | 4          | 132 . 9108                               |
|                | 1,5             | 25  | 4,3  | 0,06       |               | 30                  | 6          | 4          | 132 . 9158                               |
|                | 2,2             | 30  | 4,4  | 0,06       |               | 20                  | 5          | 4          | 132 . 9228                               |
|                | 3,3             | 37  | 4,7  | 0,06       |               | 14                  | 5          | 4          | 132 . 9338                               |
|                | 4,7             | 48  | 4,9  | 0,06       |               | 9,6                 | 4          | 4          | 132 . 9478                               |
|                | 6,8             | 60  | 5,4  | 0,06       |               | 6,6                 | 3,5        | 5          | 132 . 9688                               |
|                | 10              | 73  | 6  | 0,06       |               | 4,5                 | 2,8        | 5          | 132 . 9109                               |
|                | 15              | 100   | 7  | 0,06       |               | 3                   | 1,8        | 6          | 132 . 9159                               |
|                | 22              | 130   | 8,4  | 0,06       |               | 2                   | 1,3        | 6          | 132 . 9229                               |
|                | 33              | 170   | 10,6   | 0,06       |               | 1,4                 | 1,1        | 7          | 132 . 9339                               |
|                | 47              | 220   | 13,4   | 0,06       |               | 1                   | 0,90       | 7          | **                                       |
|                | 47              | 220   | 9,4  | 0,06       | 2,4           | 1                   | 0,90       | 00         | 132 . 9479                               |
|                | 68              | 250   | 13,5   | 0,06       | 1,7           | 0,80                |            | 01         | 132 . 9689                               |
|                | 100             | 380   | 20   | 0,06       | 1,1           | 0,50                |            | 02         | 132 . 9101                               |
|                | 150             | 400   | 30   | 0,06       | 0,75          | 0,35                |            | 03         | 132 . 9151                               |
| 220            | 660             | 44  | 0,06   | 0,5        | 0,20          |                     | 04         | 132 . 9221 |  |
| 330            | 700             | 66  | 0,06   | 0,34       | 0,15          |                     | 04         | 132 . 9331 |  |
| 470            | 1200            | 94  | 0,06   | 0,24       | 0,10          |                     | 05         | 132 . 9471 |  |

Table 2 (continued)

| U <sub>R</sub> | nom. cap. | max. r.m.s. ripple current at T <sub>amb</sub> = 85 °C | max.d.c.leakage current at U <sub>R</sub> after 5 min | max. tan δ | max. ESR | max. impedance Ω |            | case size | catalogue number*<br>2222 followed by |
|----------------|-----------|--|---|------------|----------|------------------|------------|-----------|---------------------------------------|
|                |           |  |   |            |          | at 10 kHz        | at 100 kHz |           |                                       |
| V              | μF        | mA   | μA  |            | Ω        |                  |            |           |                                       |
| 160            | 2,2       | 22   | 7   | 0,10       |          | 55               | 30         | 4         | 133 . 1228                            |
|                | 3,3       | 30   | 7   | 0,10       |          | 36               | 25         | 5         | 133 . 1338                            |
|                | 4,7       | 37   | 7   | 0,10       |          | 26               | 20         | 5         | 133 . 1478                            |
|                | 6,8       | 50   | 7   | 0,10       |          | 18               | 16         | 6         | 133 . 1688                            |
|                | 10        | 61   | 7   | 0,10       |          | 12               | 10         | 6         | 133 . 1109                            |
|                | 15        | 85   | 9   | 0,10       |          | 8                | 6          | 7         | 133 . 1159                            |
|                | 22        | 120  | 11  | 0,10       |          | 5,5              | 2,5        | 7         | **                                    |
|                | 22        | 120  | 7   | 0,10       | 6,8      | 5,5              | 2,5        | 00        | 133 . 1229                            |
|                | 47        | 180  | 15  | 0,10       | 3,2      | 2,6              |            | 02        | 133 . 1479                            |
|                | 100       | 350  | 32  | 0,10       | 1,5      | 1,2              |            | 03        | 133 . 1101                            |
|                | 220       | 610  | 70  | 0,10       | 0,7      | 0,60             |            | 05        | 133 . 1221                            |
| 250            | 1,5       | 18   | 7   | 0,10       |          | 73               | 35         | 4         | 133 . 3158                            |
|                | 2,2       | 25   | 7   | 0,10       |          | 50               | 30         | 5         | 133 . 3228                            |
|                | 4,7       | 37   | 7   | 0,10       |          | 23               | 16         | 6         | 133 . 3478                            |
|                | 6,8       | 55   | 7,4   | 0,10       |          | 16               | 12         | 7         | 133 . 3688                            |
|                | 10        | 66   | 9   | 0,10       |          | 11               | 9          | 7         | 133 . 3109                            |
|                | 22        | 130  | 11  | 0,10       | 6,8      | 5                |            | 01        | 133 . 3229                            |
|                | 47        | 200  | 24  | 0,10       | 3,2      | 2,3              |            | 03        | 133 . 3479                            |
|                | 100       | 370  | 50  | 0,10       | 1,5      | 1,1              |            | 05        | 133 . 3101                            |
| 350            | 1         | 15   | 7   | 0,10       |          | 100              | 40         | 4         | 133 . 5108                            |
|                | 1,5       | 20   | 7   | 0,10       |          | 67               | 32         | 5         | 133 . 5158                            |
|                | 2,2       | 25   | 7   | 0,10       |          | 45               | 28         | 5         | 133 . 5228                            |
|                | 3,3       | 34   | 7   | 0,10       |          | 30               | 20         | 6         | 133 . 5338                            |
|                | 4,7       | 43   | 7,3   | 0,10       |          | 21               | 15         | 6         | 133 . 5478                            |
|                | 10        | 90   | 7   | 0,10       | 15       | 10               |            | 01        | 133 . 5109                            |
|                | 22        | 140  | 15,5  | 0,10       | 6,8      | 4,5              |            | 02        | 133 . 5229                            |
|                | 47        | 270  | 33  | 0,10       | 3,2      | 2,1              |            | 04        | 133 . 5479                            |

\* Replace dot in catalogue number by:  
 1 for style 1, case sizes 00 to 05, supplied in box;  
 2 for style 1 on bandoliers on reel  
 3 for style 1 on bandoliers in box } case sizes 4 to 7  
 4 for style 2; case sizes 02 to 05.

\*\* See Table 3.

Table 3

| U <sub>R</sub> | nom. cap. $\mu$ F | case size | catalogue number                 |                                 |
|----------------|-------------------|-----------|----------------------------------|---------------------------------|
|                |                   |           | capacitors on bandoliers on reel | capacitors on bandoliers in box |
| 16             | 330               | 7         | 2222 132 90508                   | 2222 132 90509                  |
|                | 470               | 7         | 90507                            | 90502                           |
| 25             | 220               | 7         | 90503                            | 90504                           |
| 40             | 150               | 7         | 90511                            | 90512                           |
| 63             | 68                | 7         | 90513                            | 90514                           |
| 100            | 47                | 7         | 90505                            | 90506                           |
| 160            | 22                | 7         | 2222 133 90502                   | 2222 133 90503                  |

Capacitance

Nominal capacitance at 100 Hz and T<sub>amb</sub> = 20 °C

Tolerance on nominal capacitance at 100 Hz

see Table 2

-10 to +50%

7Z92383

7Z92384.1

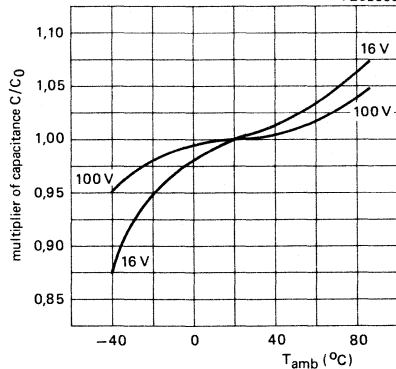


Fig. 2 Multiplier of capacitance as a function of ambient temperature, case sizes 4 to 7; C<sub>0</sub> = capacitance at 20 °C, 100 Hz.

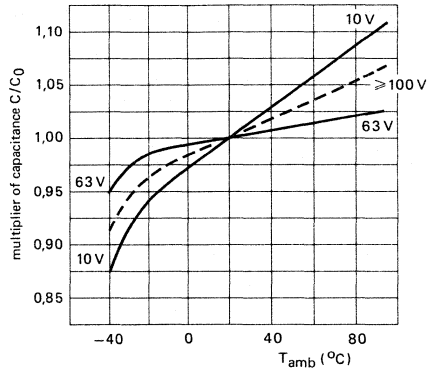


Fig. 3 Multiplier of capacitance as a function of ambient temperature, case sizes 00 to 05; C<sub>0</sub> = capacitance at 20 °C, 100 Hz.

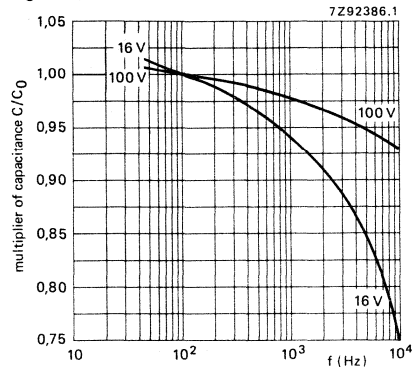


Fig. 4 Multiplier of capacitance as a function of frequency, case sizes 4 to 7; C<sub>0</sub> = capacitance at 20 °C, 100 Hz.

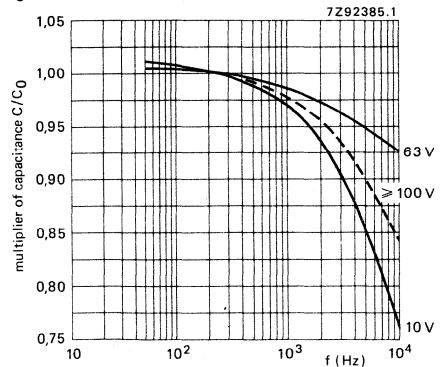


Fig. 5 Multiplier of capacitance as a function of frequency, case sizes 00 to 05; C<sub>0</sub> = capacitance at 20 °C, 100 Hz.

**Voltage**

|  |                                       |
|--|---------------------------------------|
| Max. permissible voltage   | 1,1 x U <sub>R</sub>                  |
| Ripple voltage* = max. permissible a.c. voltage providing the following three conditions are met:                |                                       |
| a. max. (d.c. + peak a.c.) voltage   | 1,1 x U <sub>R</sub>                  |
| b. max. peak a.c. voltage without d.c. voltage applied   | 1 V                                   |
| c. momentary value of applied voltage  | between 1,1 x U <sub>R</sub> and -1 V |
| Surge voltage = max. permissible voltage for short periods (see also Tests and Requirements in the Introduction) | 1,15 x U <sub>R</sub>                 |
| Reverse voltage = max. d.c. voltage applied in the reverse polarity at 85 °C                                     | 1 V                                   |

**Ripple current\*\***

Maximum permissible r.m.s. ripple current at 100 Hz and T<sub>amb</sub> = 85 °C see Table 2

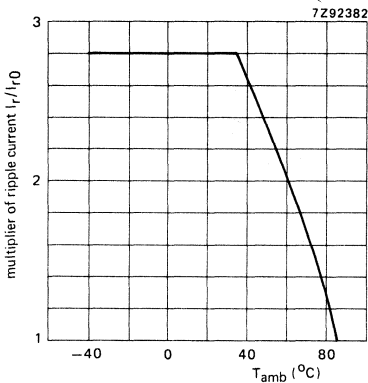


Fig. 6 Multiplier of ripple current as a function of ambient temperature, case sizes 4 to 7; I<sub>r0</sub> = ripple current at 85 °C and 100 Hz.

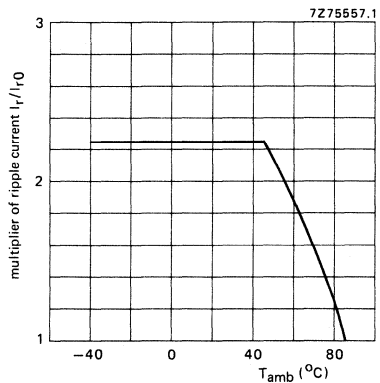


Fig. 7 Multiplier of ripple current as a function of ambient temperature, case sizes 00 to 05; I<sub>r0</sub> = ripple current at 85 °C and 100 Hz.

\* Ripple voltages are not applicable if the max. permissible ripple current is exceeded. In that case the ripple current is decisive.  
 \*\* Ripple currents are not applicable if the max. permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

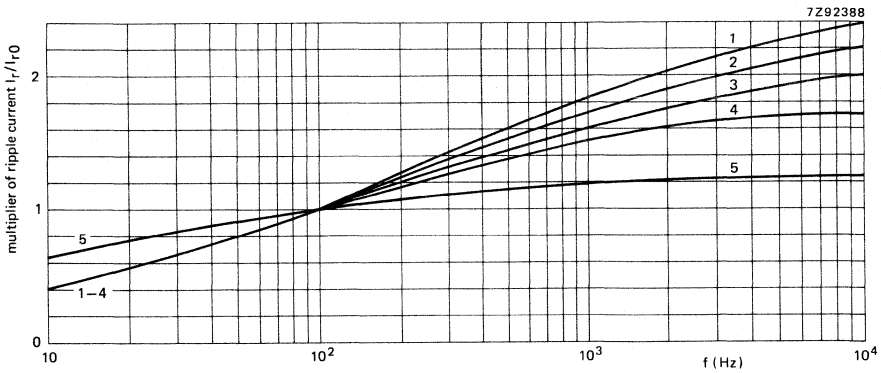


Fig. 8 Multiplier of ripple current as a function of frequency, **case sizes 4 to 7**;  $I_{r0}$  = ripple current at 85 °C and 100 Hz.

Curve 1 = 1  $\mu$ F, 100 V;                      curve 2 = 1,5  $\mu$ F, 100 V;                      curve 3 = 2,2  $\mu$ F, 100 V;  
 curve 4 =  $\geq$  3,3  $\mu$ F, 100 V;                      curve 5 = 16 V.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_{r^2} \text{ max}$$

- $I_r \text{ max}$                       = maximum ripple current at 100 Hz and applicable ambient temperature;
- $I_n$                               = ripple current at a certain frequency;
- $\sqrt{r_n} = I_r / I_{r0}$               = multiplying factor at a same frequency.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitors. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

*Case sizes 4 to 7*

Maximum d.c. leakage current 1 min after application

of  $U_R$  at  $T_{amb} = 20\text{ }^\circ\text{C}$ ,

$U_R = 10$  to  $100\text{ V}$

$U_R = 160$  to  $350\text{ V}$

$0,01\text{ CU} + 3\text{ }\mu\text{A}$   
( $0,01\text{ CU} + 3\text{ }\mu\text{A}$ ) or  $20\text{ }\mu\text{A}$ ,  
whichever is greater

Maximum d.c. leakage current 5 min after application

of  $U_R$  at  $T_{amb} = 20\text{ }^\circ\text{C}$

$U_R = 10$  to  $100\text{ V}$

$U_R = 160$  to  $350\text{ V}$

see Table 2 ( $0,002\text{ CU} + 4\text{ }\mu\text{A}$ )  
( $0,002\text{ CU} + 4\text{ }\mu\text{A}$ ) or  $7\text{ }\mu\text{A}$ ,  
whichever is greater

D.C. leakage current during continuous operation at  $U_R$

at  $T_{amb} = 20\text{ }^\circ\text{C}$

at  $T_{amb} = 85\text{ }^\circ\text{C}$

$0,001\text{ CU} + 1\text{ }\mu\text{A}$   
 $0,002\text{ CU} + 4\text{ }\mu\text{A}$

*Case sizes 00 to 05*

Maximum d.c. leakage current 1 min after application

of  $U_R$  at  $T_{amb} = 20\text{ }^\circ\text{C}$

$0,006\text{ CU} + 4\text{ }\mu\text{A}$

Maximum d.c. leakage current 5 min after application

of  $U_R$  at  $T_{amb} = 20\text{ }^\circ\text{C}$

see Table 2 ( $0,002\text{ CU}$ )

D.C. leakage current during continuous operation at  $U_R$

at  $T_{amb} = 20\text{ }^\circ\text{C}$

at  $T_{amb} = 85\text{ }^\circ\text{C}$

$< 0,0005\text{ CU}$   
 $0,002\text{ CU}$

If owing to prolonged storage and/or storage at an excessive temperature ( $> 40\text{ }^\circ\text{C}$ ) the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

Tan  $\delta$  (dissipation factor)

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ,  
measured by a four-terminal circuit (Thomson circuit)

see Table 2

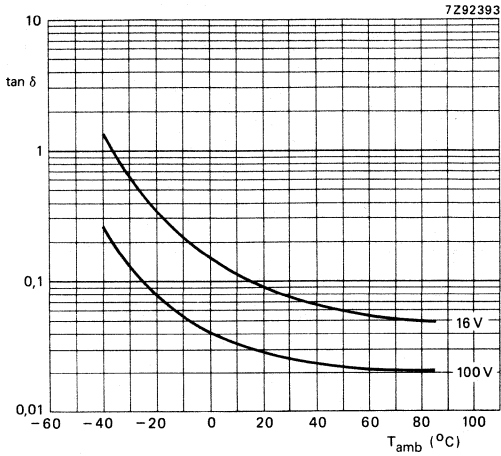


Fig. 9 Typical tan  $\delta$  as a function of ambient temperature at 100 Hz, case sizes 4 to 7.

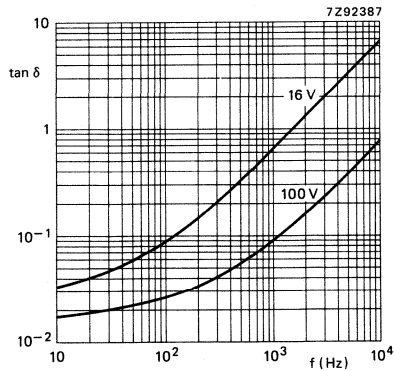


Fig. 10 Typical tan  $\delta$  as a function of frequency at 20  $^{\circ}\text{C}$ , case sizes 4 to 7.

**Impedance (Z)**

Maximum impedance at  $T_{amb} = 20\text{ }^{\circ}\text{C}$  and 10 kHz or 100 kHz,  
measured by a four-terminal circuit (Thomson circuit)

see Table 2

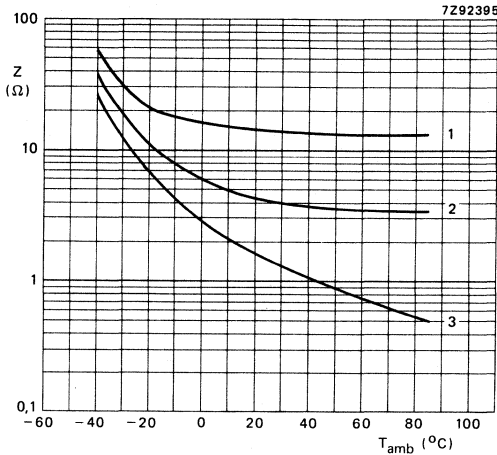


Fig. 11 Typical impedance as a function of ambient temperature at 10 kHz, **case size 4**.  
Curve 1 = 1  $\mu\text{F}$ , 100 V; curve 2 = 4,7  $\mu\text{F}$ , 100 V;  
curve 3 = 47  $\mu\text{F}$ , 16 V.

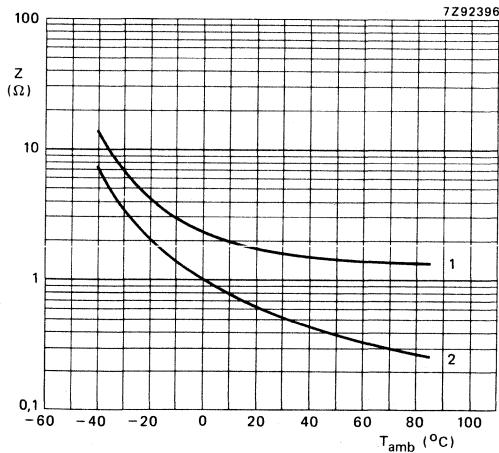


Fig. 12 Typical impedance as a function of ambient temperature at 10 kHz, **case size 5**.  
Curve 1 = 10  $\mu\text{F}$ , 100 V; curve 2 = 150  $\mu\text{F}$ , 16 V.



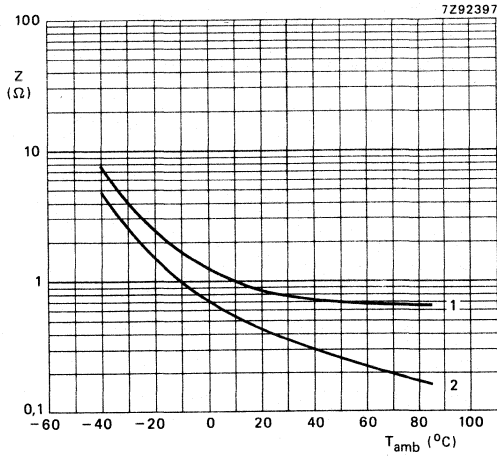


Fig. 13 Typical impedance as a function of ambient temperature at 10 kHz, **case size 6**.  
Curve 1 = 22 μF, 100 V; curve 2 = 220 μF, 16 V.

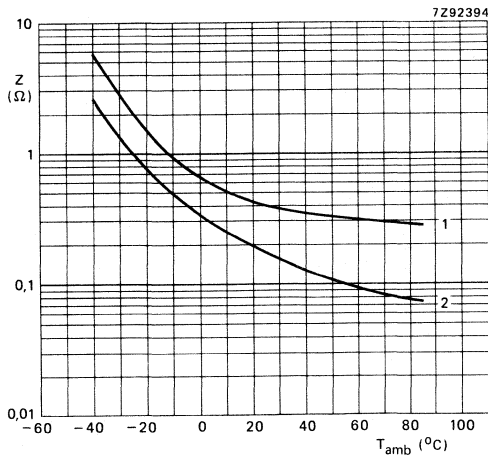


Fig. 14 Typical impedance as a function of ambient temperature at 10 kHz, **case size 7**.  
Curve 1 = 47 μF, 100 V; curve 2 = 470 μF, 16 V.

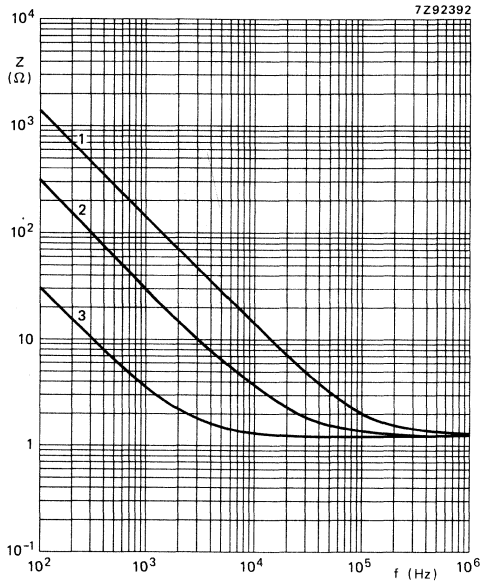


Fig. 15 Typical impedance as a function of frequency at 20 °C, case size 4.  
Curve 1 = 1  $\mu$ F, 100 V; curve 2 = 4,7  $\mu$ F, 100 V;  
curve 3 = 47  $\mu$ F, 16 V.

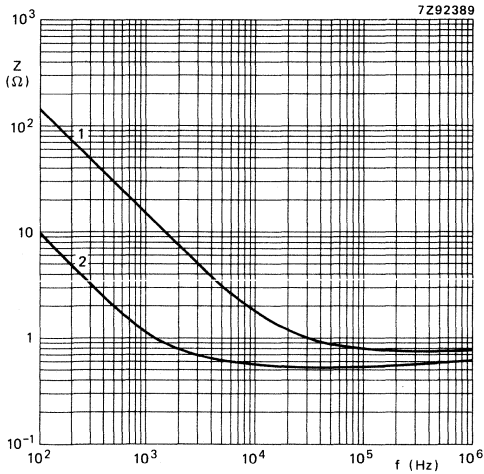


Fig. 16 Typical impedance as a function of frequency at 20 °C, case size 5.  
Curve 1 = 10  $\mu$ F, 100 V; curve 2 = 150  $\mu$ F, 16 V.

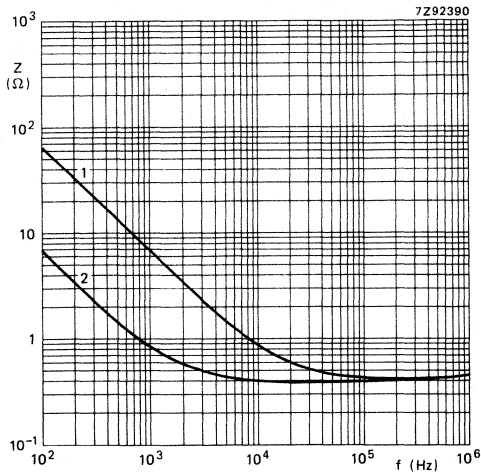


Fig. 17 Typical impedance as a function of frequency at 20 °C, case size 6.  
Curve 1 = 22 μF, 100 V; curve 2 = 220 μF, 16 V.

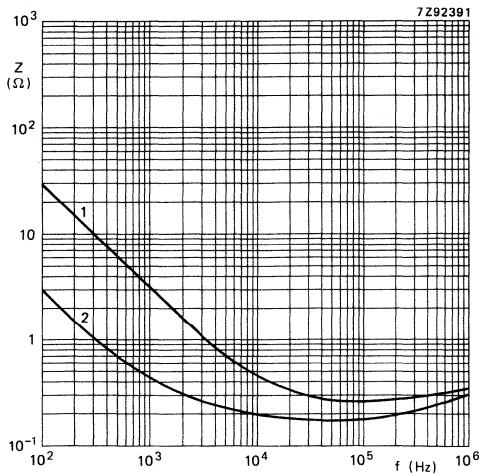


Fig. 18 Typical impedance as a function of frequency at 20 °C, case size 7.  
Curve 1 = 47 μF, 100 V; curve 2 = 470 μF, 16 V.

**Equivalent series resistance (ESR)**

Maximum ESR at 100 Hz and  $T_{amb} = 20\text{ }^{\circ}\text{C}$ ,  
measured by a four-terminal circuit (Thomson Circuit)

see Table 2

**Equivalent series inductance (ESL)**

Case size 4

typ. 25 nH

Case size 5

typ. 40 nH

Case sizes 6, 7, 00 and 01

typ. 50 nH

Case size 02

typ. 55 nH

Case sizes 03, 04 and 05

typ. 60 nH

**OPERATIONAL DATA**

Category temperature range

case sizes 4 to 7

-40 to + 85 °C

case sizes 00 to 05,  $U_R \leq 100\text{ V}$

-55 to + 85 °C

case sizes 00 to 05,  $U_R \geq 160\text{ V}$

-40 to + 85 °C

Typical life time

case sizes 4 and 5

case sizes 6 to 05

$T_{amb} = 85\text{ }^{\circ}\text{C}$

$T_{amb} = 40\text{ }^{\circ}\text{C}$

$\geq 10\ 000\text{ h}$

$\geq 200\ 000\text{ h}$

$\geq 15\ 000\text{ h}$

$\geq 300\ 000\text{ h}$

(approx. 40 years)

Shelf life at 0 V and  $T_{amb} = 85\text{ }^{\circ}\text{C}$

500 h

**PACKING**

All capacitors are supplied in boxes, case sizes 4 to 7 are on bandoliers in boxes or on reels. The number of capacitors per box or per reel is shown in Table 4.

**Table 4**

| case size | number of capacitors per box or per reel |
|-----------|--|
| 4         | 1000                                     |
| 5         | 500                                      |
| 6         | 500                                      |
| 7         | 500                                      |
| 00        | 200                                      |
| 01        | 200                                      |
| 02        | 200                                      |
| 03        | 200                                      |
| 04        | 100                                      |
| 05        | 100                                      |

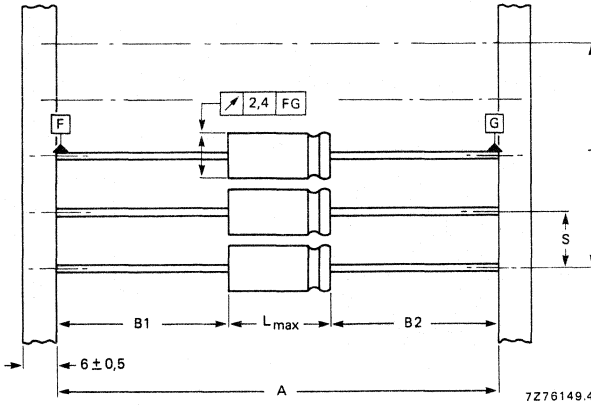


Fig. 19 Capacitors (case sizes 4 to 7) on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 5 for dimensions A, S, T and  $L_{max}$ .  $|B1 - B2| = 1,4 + (L_{max} - L)$  mm max.

**Table 5**  
Dimensions in mm

| case size | A            | S             | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|--------------|---------------|--------------------------------|------------------|-----------|
|           |              |               | $n < 50$                       | $50 < n < 100$   |           |
| 4         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 5         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 18,5      |
| 6         | $73 \pm 1,6$ | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 18,5      |
| 7         | $73 \pm 1,6$ | $15 \pm 0,75$ | $15 (n-1) \pm 2$               | $15 (n-1) \pm 4$ | 25,0      |

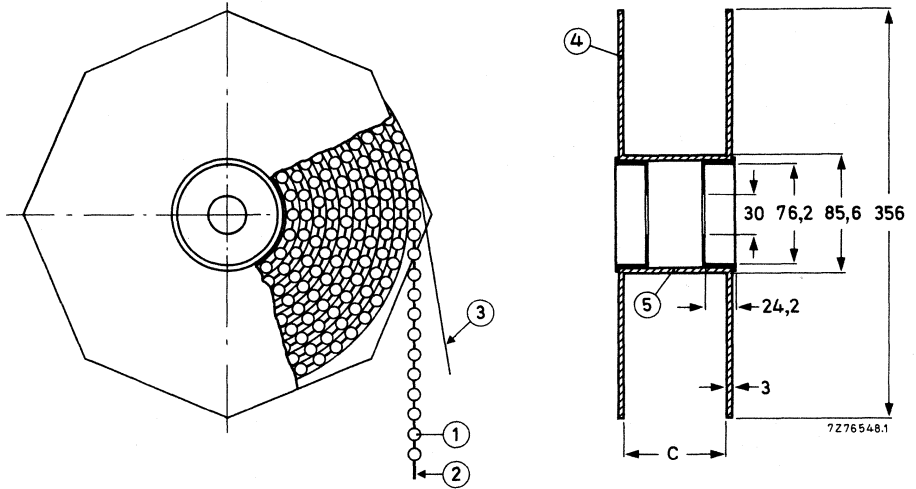


Fig. 20 Capacitors (case sizes 4 to 7) on bandoliers on reel; dimension C is 88,5 mm; the overall width of the reel is 99,5 mm.

1 = capacitor  
2 = bandolier

3 = paper  
4 = flange

5 = cylinder

### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors, with the exception of IEC 384-4 subclause 9.14, for which the following is valid.

IEC 384-4 subclause 9.14.

IEC 68-2 test method: no reference.

Name of test: Endurance.

Procedure: 6000 h at  $U_R$  and 85 °C for case sizes 4 and 5;

8000 h at  $U_R$  and 85 °C for case sizes 6 to 05.

Requirements: No visible damage, no leakage of electrolyte, insulation resistance  $> 100 \text{ M}\Omega$ , no breakdown or flashover, d.c. leakage current  $\leq$  stated limit,  $\tan \delta \leq 1,3 \times$  stated limit, impedance at 10 kHz  $\leq 2 \times$  stated limit,  $\Delta C/C \leq 15\%$ .

After shelf life test, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min, at least 24 h and not more than 48 h before measurements.

### Note

Capacitors 2222 132 and 2222 133 are miniature and small types, long-life grade.

## SOLID ALUMINIUM CAPACITORS






## SOLID ALUMINIUM CAPACITORS



- Small type
- Axial leads; metal case; ceramic seal
- Very long life
- High reliability
- Industrial and military applications



## QUICK REFERENCE DATA

Nominal capacitance range (E6 series)

2,2 to 330  $\mu\text{F}$ 

Tolerance on nominal capacitance

-20 to +20% \*

Rated voltage range,  $U_R$  (R5 series)

6,3 to 50 V

Category temperature range

-55 to +125  $^{\circ}\text{C}$ 

Usable temperature range

-80 to +200  $^{\circ}\text{C}$ 

Endurance test

at  $T_{\text{amb}} = 125^{\circ}\text{C}$ 

5000 h

at  $T_{\text{amb}} = 150^{\circ}\text{C}$ 

2000 h

Basic specification

IEC 384-4, long-life grade

Climatic category, IEC 68; 6,3 V to 40 V ranges

55/125/56

Climatic category, IEC 68; 50 V range

55/085/56

at 50 V

55/125/56

at 40 V

EHC/JQ/TW

DIN 40040

434

NF C20-600

CECC 30 302-001

Approvals; 6,3 V to 40 V ranges

U.K. : Post Office;

Ministry of Defence DEF 59-44

Sweden: FOA/FTL

ESA : SCC Arcao AR C121 (Ariane)

France : Liste LNZ 44-04 COS-A

Selection chart for  $C_{\text{nom}}$ - $U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 40 | 50 |
| 2,2                               |           |    |    |    | 1  | 1  |
| 3,3                               |           |    |    |    | 1  |    |
| 4,7                               |           |    |    | 1  | 2A | 2A |
| 6,8                               |           |    |    |    | 2A | 2A |
| 10                                |           |    | 1  | 2A | 2A |    |
| 15                                |           | 1  | 2A |    |    | 4  |
| 22                                | 1         |    |    | 2A | 4  | 5  |
| 33                                |           | 2A | 2A | 4  | 5  | 6  |
| 47                                | 2A        | 2A | 4  | 5  | 6  |    |
| 68                                | 2A        |    | 5  | 6  |    |    |
| 100                               |           | 4  | 6  |    |    |    |
| 150                               | 4         | 5  |    |    |    |    |
| 220                               | 5         | 6  |    |    |    |    |
| 330                               | 6         |    |    |    |    |    |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 1         | $\emptyset$ 6,5 x 15    |
| 2A        | $\emptyset$ 7,5 x 20    |
| 4         | $\emptyset$ 9 x 22,5    |
| 5         | $\emptyset$ 10 x 31,5   |
| 6         | $\emptyset$ 12,5 x 31,5 |

\*  $\pm 10\%$  to special order.

**APPLICATION**

These capacitors utilize advanced technology to achieve long life, high stability, excellent reliability, very high ripple current rating and low temperature dependence. The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitors have etched aluminium foil electrodes separated by a layer of glassfabric and filled with solid semiconductive, pyrolytically formed manganese dioxide. The capacitors are housed in an aluminium case with soldered-copper axial leads and are sealed by a ceramic disc. The cathode lead is welded to the case, which is insulated with a blue transparent plastic sleeve.

The capacitors are supplied on bandoliers in boxes and on reels.

Note: A special version is available, which is partly epoxy-filled, withstanding severe shock and vibration tests; see also "Tests and requirements".

**MECHANICAL DATA**

Dimensions in mm

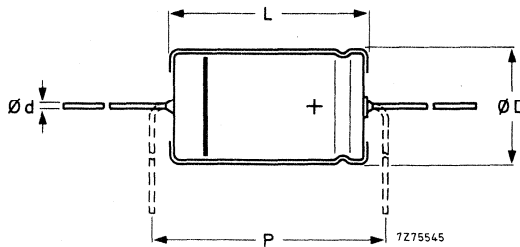


Fig. 1 For dimensions d, D, L and P, see Table 1a.

**Table 1a**

| case size | d*  |       | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> | mass** approx. g |
|-----------|-----|-------|------------------|------------------|------------------|------------------|------------------|------------------|
| 1         | 0,6 | +0,06 | 6,5              | 15               | 6,7              | 15,3             | 20               | 1,2              |
| 2A        | 0,6 |       | 7,5              | 20               | 7,6              | 20,4             | 22,5             | 2,4              |
| 4         | 0,6 | -0,05 | 9                | 22,5             | 9,3              | 23,3             | 25               | 3,3              |
| 5         | 0,8 | +0,08 | 10               | 31,5             | 10,3             | 32               | 35               | 4,5              |
| 6         | 0,8 |       | 12,5             | 31,5             | 12,9             | 32               | 35               | 6,3              |

\* Tolerance according to IEC 301; not applicable to a length of 2 mm from the lead ends, which is covered by the bandoliers.

\*\* Add 10% for epoxy-filled version.

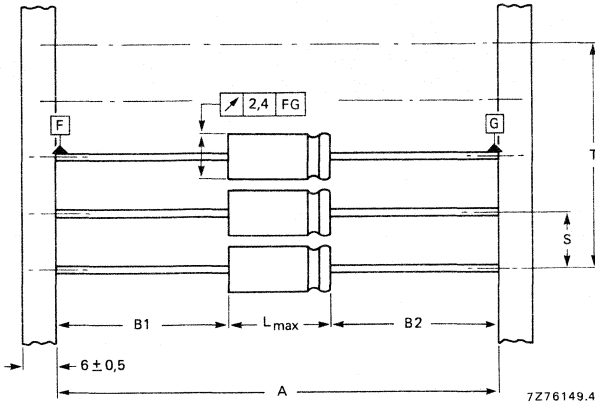


Fig. 2 Capacitors on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 1b for dimensions A, S, T and  $L_{max}$ .  
 $|B1-B2| = 1,4 + (L_{max}-L)$  mm max.

Table 1b

| case size | A            | S             | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|--------------|---------------|--------------------------------|------------------|-----------|
|           |              |               | $n < 50$                       | $50 < n < 100$   |           |
| 1         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 15,3      |
| 2A        | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 20,4      |
| 4         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 23,3      |
| 5         | $73 \pm 1,6$ | $15 \pm 0,75$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 32        |
| 6         | $73 \pm 1,6$ | $15 \pm 0,75$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 32        |

**Marking**

The capacitors are marked with: group number (121), capacitance, tolerance, rated and derated voltages at corresponding maximum temperatures, date code, a band to identify the negative terminal, "+" signs for the positive terminal and name of manufacturer.

**Mounting**


No special provisions are required for soldering to the tinned leads. (2 mm of the anode lead nearest the body are not solderable).

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.  
See also the corresponding paragraphs.

**Table 2**


| U <sub>R</sub> | nom. cap.<br>μF | max. r.m.s. ripple current at T <sub>amb</sub> = 125 °C, no d.c. voltage applied<br>mA | max. d.c. leakage current at U <sub>R</sub> after 1 min*<br>μA | max. tan δ | max. ESR<br>Ω | max. impedance at 100 kHz*<br>Ω | case size | catalogue number 2222 121 followed by |         | epoxy-filled version** |
|----------------|-----------------|--|--|------------|---------------|---------------------------------|-----------|---------------------------------------|---------|------------------------|
|                |                 |  |  |            |               |                                 |           | in box                                | on reel |                        |
| 6,3            | 22              | 60   | 10   | 0,18       | 16,5          | 1,2                             | 1         | 13229                                 | 23229   | 63229                  |
|                | 47              | 100  | 21   | 0,18       | 7,6           | 1,0                             | 2A        | 13479                                 | 23479   | 63479                  |
|                | 68              | 130  | 30   | 0,18       | 5,3           | 0,75                            | 2A        | 13689                                 | 23689   | 63689                  |
|                | 150             | 220  | 66   | 0,18       | 2,4           | 0,4                             | 4         | 13151                                 | 23151   | 63151                  |
|                | 220             | 320  | 97   | 0,18       | 1,6           | 0,3                             | 5         | 13221                                 | 23221   | 63221                  |
|                | 330             | 430  | 146  | 0,18       | 1,1           | 0,2                             | 6         | 13331                                 | 23331   | 63331                  |
| 10             | 15              | 50   | 11   | 0,16       | 21,5          | 2,5                             | 1         | 14159                                 | 24159   | 64159                  |
|                | 33              | 85   | 23   | 0,16       | 9,6           | 1,25                            | 2A        | 14339                                 | 24339   | 64339                  |
|                | 47              | 115  | 33   | 0,16       | 6,8           | 0,75                            | 2A        | 14479                                 | 24479   | 64479                  |
|                | 100             | 190  | 70   | 0,16       | 3,2           | 0,5                             | 4         | 14101                                 | 24101   | 64101                  |
|                | 150             | 280  | 105  | 0,16       | 2,1           | 0,4                             | 5         | 14151                                 | 24151   | 64151                  |
|                | 220             | 380  | 154  | 0,16       | 1,4           | 0,4                             | 6         | 14221                                 | 24221   | 64221                  |
| 16             | 10              | 45   | 16   | 0,14       | 28            | 2,5                             | 1         | 15109                                 | 25109   | 65109                  |
|                | 15              | 60   | 24   | 0,14       | 19            | 1,25                            | 2A        | 15159                                 | 25159   | 65159                  |
|                | 33              | 105  | 53   | 0,14       | 8,4           | 1,25                            | 2A        | 15339                                 | 25339   | 65339                  |
|                | 47              | 140  | 75   | 0,14       | 5,9           | 0,5                             | 4         | 15479                                 | 25479   | 65479                  |
|                | 68              | 200  | 109  | 0,14       | 4,1           | 0,4                             | 5         | 15689                                 | 25689   | 65689                  |
|                | 100             | 270  | 160  | 0,14       | 2,8           | 0,4                             | 6         | 15101                                 | 25101   | 65101                  |



\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.  
\*\* Withstands severe shock and vibration.

Table 2 (continued)

| UR | nom. cap.<br>$\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$ , no d.c. voltage applied<br>mA | max. d.c. leakage current at UR after 1 min*<br>$\mu\text{A}$ | max. $\tan \delta$ | max. ESR<br>$\Omega$ | max. impedance at 100 kHz*<br>$\Omega$ | case size | catalogue number 2222 121 followed by |         | epoxy-filled version** |
|----|----------------------------|--|---|--------------------|----------------------|--|-----------|---------------------------------------|---------|------------------------|
|    |                            |  |   |                    |                      |  |           | in box                                | on reel |                        |
| 25 | 4,7                        | 30   | 12  | 0,14               | 60                   | 5                                      | 1         | 16478                                 | 26478   | 66478                  |
|    | 10                         | 50   | 25  | 0,14               | 28                   | 2,5                                    | 2A        | 16109                                 | 26109   | 66109                  |
|    | 22                         | 85   | 55  | 0,14               | 13                   | 2,5                                    | 2A        | 16229                                 | 26229   | 66229                  |
|    | 33                         | 120  | 83  | 0,14               | 8,4                  | 1                                      | 4         | 16339                                 | 26339   | 66339                  |
|    | 47                         | 160  | 118   | 0,14               | 5,9                  | 0,8                                    | 5         | 16479                                 | 26479   | 66479                  |
|    | 68                         | 220  | 170   | 0,14               | 4,1                  | 0,5                                    | 6         | 16689                                 | 26689   | 66689                  |
| 40 | 2,2                        | 20   | 9   | 0,12               | 109                  | 7,5                                    | 1         | 17228                                 | 27228   | 67228                  |
|    | 3,3                        | 30   | 13  | 0,12               | 73                   | 7,5                                    | 1         | 17338                                 | 27338   | 67338                  |
|    | 4,7                        | 35   | 19  | 0,12               | 51                   | 2,5                                    | 2A        | 17478                                 | 27478   | 67478                  |
|    | 6,8                        | 45   | 27  | 0,12               | 35                   | 2,5                                    | 2A        | 17688                                 | 27688   | 67688                  |
|    | 10                         | 60   | 40  | 0,12               | 24                   | 2,5                                    | 2A        | 17109                                 | 27109   | 67109                  |
|    | 22                         | 100  | 88  | 0,12               | 11                   | 1                                      | 4         | 17229                                 | 27229   | 67229                  |
| 50 | 33                         | 150  | 132   | 0,12               | 7,3                  | 0,8                                    | 5         | 17339                                 | 27339   | 67339                  |
|    | 47                         | 200  | 188   | 0,12               | 5,1                  | 0,5                                    | 6         | 17479                                 | 27479   | 67479                  |
|    | 2,2                        | 15   | 11  | 0,25               | 230                  | 20                                     | 1         | 18228                                 | 28228   | 68228                  |
|    | 4,7                        | 25   | 24  | 0,25               | 106                  | 10                                     | 2A        | 18478                                 | 28478   | 68478                  |
|    | 6,8                        | 35   | 34  | 0,25               | 74                   | 6                                      | 2A        | 18688                                 | 28688   | 68688                  |
|    | 15                         | 60   | 75  | 0,25               | 34                   | 4                                      | 4         | 18159                                 | 28159   | 68159                  |
| 33 | 22                         | 85   | 110   | 0,25               | 23                   | 3,2                                    | 5         | 18229                                 | 28229   | 68229                  |
|    | 33                         | 110  | 165   | 0,25               | 15,5                 | 2                                      | 6         | 18339                                 | 28339   | 68339                  |



\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.

\*\* Withstands severe shock and vibration.

**Capacitance**

Nominal capacitance values at 100 Hz  
and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

Tolerance on nominal capacitance at 100 Hz

see Table 2

$\pm 20\%$ ;  $\pm 10\%$  to  
special order

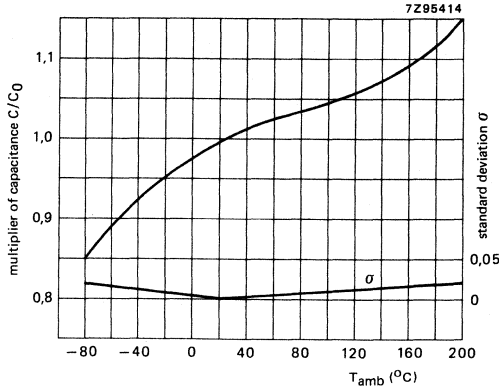


Fig. 3 Typical multiplier of capacitance as a function of ambient temperature.  
 $C_0$  = capacitance at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

**Rated voltage**

6,3 V to 40 V ranges = max. permissible voltage at  
 $T_{amb} \leq 125\text{ }^{\circ}\text{C}$

$U_R$

50 V range = max. permissible voltage at  
 $T_{amb} \leq 85\text{ }^{\circ}\text{C}$

$U_R^*$

**Derated voltage**

6,3 V to 40 V ranges = max. permissible voltage at  
 $T_{amb}$  from  $125\text{ }^{\circ}\text{C}$  to  $200\text{ }^{\circ}\text{C}$

$0,63 \times U_R$

50 V range = max. permissible voltage at  
 $T_{amb}$  from  $85\text{ }^{\circ}\text{C}$  to  $125\text{ }^{\circ}\text{C}$

40 V

**Ripple voltage**

Max. permissible a.c. voltage providing the  
following four conditions are met:

a) Max. a.c. voltage, with negative d.c. voltage applied

2 V

\* 63 V is permissible for max. 500 h at  $T_{amb} = 85\text{ }^{\circ}\text{C}$ .

- b) Max. peak a.c. voltage, without d.c. voltage applied  
 at  $f \leq 0,1$  Hz  
 at  $0,1 \text{ Hz} < f \leq 1$  Hz  
 at  $1 \text{ Hz} < f \leq 10$  Hz  
 at  $10 \text{ Hz} < f \leq 50$  Hz  
 at  $f > 50$  Hz
- c) Momentary value of applied voltage, with positive d.c. voltage applied

| $T_{amb} \leq 85 \text{ }^\circ\text{C}$ | $85 \text{ }^\circ\text{C} < T_{amb} \leq 125 \text{ }^\circ\text{C}^*$ |
|--|---|
| $0,30 \times U_R$                        | $0,15 \times U_R$   |
| $0,45 \times U_R$                        | $0,22 \times U_R$   |
| $0,60 \times U_R$                        | $0,30 \times U_R$   |
| $0,65 \times U_R$                        | $0,32 \times U_R$   |
| $0,80 \times U_R$                        | $0,40 \times U_R$   |

between  $U_R$  (in the positive half wave) and the limits mentioned under b) (in the negative half wave)

- d) Ripple voltage limits are not applicable if the maximum ripple current is exceeded. In that case the ripple current is decisive. Whichever is in practice decisive, depends on the actual impedance of the capacitor. Table 3 should be considered as an aid only in establishing whether the ripple voltage or the ripple current is decisive.

Table 3

| frequency                              | decisive factor   |   |
|--|---|---|
|  | at $T_{amb} \leq 85 \text{ }^\circ\text{C}$   | $T_{amb} > 85 \text{ }^\circ\text{C}$   |
| $f \leq 50 \text{ Hz}$                 | voltage   | voltage, if actual capacitor impedance is high; current, if actual capacitor impedance is low |
| $50 \text{ Hz} < f \leq 1 \text{ kHz}$ | voltage, if actual capacitor impedance is high; current, if actual capacitor impedance is low | current   |
| $f > 1 \text{ kHz}$                    | current   | current   |

Surge voltage  
 6,3 V to 40 V ranges = max. permissible voltage for short periods (see also "Tests and requirements")  
 50 V range = max. permissible voltage for max. 500 h

| $T_{amb} \leq 85 \text{ }^\circ\text{C}$ | $85 \text{ }^\circ\text{C} < T_{amb} \leq 125 \text{ }^\circ\text{C}$ |
|--|---|
|  | $1,15 \times U_R$   |
| 63 V                                     | 45 V  |

\* For 50 V range,  $U_R = 40 \text{ V}$ .

Reverse voltage

6,3 V to 40 V ranges = max. d.c. voltage continuously (2000 h) applied in the reverse polarity,  
 at  $T_{amb} \leq 85\text{ }^{\circ}\text{C}$   
 at  $85\text{ }^{\circ}\text{C} < T_{amb} \leq 125\text{ }^{\circ}\text{C}$   
 50 V range = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods (see also "Tests and requirements")

| $T_{amb} \leq 85\text{ }^{\circ}\text{C}$ | $85\text{ }^{\circ}\text{C} < T_{amb} \leq 125\text{ }^{\circ}\text{C}$ |
|---|---|
|   | $0,30 \times U_R$<br>$0,15 \times U_R$                                  |
| 7,5 V                                     | 6 V   |

Ripple current

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 125\text{ }^{\circ}\text{C}$

see Table 2

Maximum permissible r.m.s. ripple current at other frequencies, temperatures and conditions

see Table 4 to 6, and Fig. 4

**Table 4** Temperature multiplier of ripple current ( $\sqrt{k}$ ), at 100 Hz

| $T_{amb}$<br>$^{\circ}\text{C}$ | $\sqrt{k}$ |
|---------------------------------|------------|
| 25                              | 2,6        |
| 35                              | 2,5        |
| 45                              | 2,4        |
| 55                              | 2,25       |
| 65                              | 2,2        |
| 70                              | 2,15       |
| 75                              | 2,1        |
| 80                              | 2,05       |
| 85                              | 2,0        |
| 90                              | 1,9        |
| 95                              | 1,8        |
| 100                             | 1,7        |
| 105                             | 1,6        |
| 110                             | 1,45       |
| 115                             | 1,35       |
| 120                             | 1,2        |
| 125                             | 1,0        |

**Table 5** Frequency multiplier of ripple current ( $\sqrt{r}$ ) at 25  $^{\circ}\text{C}$

| frequency<br>kHz | $\sqrt{r}$ |
|------------------|------------|
| 0,05             | 0,8        |
| 0,1              | 1,0        |
| 0,2              | 1,2        |
| 0,5              | 1,4        |
| 1                | 1,55       |
| 2                | 1,70       |
| 5                | 1,80       |
| 10               | 1,95       |
| 20               | 2,05       |
| 50               | 2,15       |
| 100              | 2,20       |
| 200              | 2,25       |
| 500              | 2,30       |
| 1000             | 2,35       |



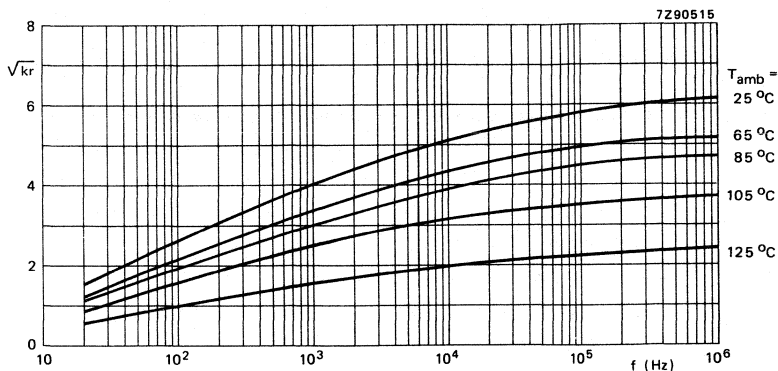


Fig. 4 Combined temperature/frequency multiplier of ripple current ( $\sqrt{kr}$ ) as a function of frequency.  
 $I_{r \max} = I_{r0} \sqrt{kr}$ .

Table 6 Multiplier of ripple current for various application conditions

| condition   | multiplier                                      |
|---|---|
| A. Capacitor insulated with a blue sleeve, mounted horizontally on a thermally non-conducting printed-circuit board, in free flowing air and in a surrounding that allows the absorption of radiation heat. | 1,0   |
| B. As under A but capacitor is not insulated  | 0,9   |
| C. As under A but capacitor is mounted vertically.  | 0,7   |
| D. As under A but capacitor is mounted on a good thermally conducting printed-circuit board.  | 1,25  |
| E. As under A but the surrounding walls etc. have a temperature higher than 125 °C and therefore prevent the absorption of heat by radiation.   | 0,6   |
| F. Capacitor has an ESR value lower than the maximum ESR.   | $\sqrt{\frac{ESR_{\max}}{ESR_{\text{actual}}}}$ |
| G. As under A but capacitor is epoxy-filled (for severe shock and vibration resistance).  | 1,05  |
| H. As under G but capacitor is mounted on a good thermally conducting printed-circuit board.  | 1,5   |

Note: Neither the maximum permissible ripple current nor the maximum permissible ripple voltage values are to be exceeded. Refer to Table 3 to find whichever factor will be decisive.

*Calculation of ripple currents*

The maximum permissible ripple current ( $I_{r \max}$ ) is a function of temperature and frequency:

$$I_{r \max} = I_{r0} \sqrt{kr},$$

where  $I_{r0}$  = max. ripple current at 100 Hz and 125 °C (see Table 2);

$$\sqrt{k} = \text{temperature multiplier (neglecting the frequency dependence)} = \sqrt{P_{\max}/P_{125}};$$

$$\sqrt{r} = \text{frequency multiplier (neglecting the temperature dependence)} = \sqrt{ESR_{100}/ESR_{\max}};$$

(for  $\sqrt{k}$  and  $\sqrt{r}$ , see Tables 4 and 5, for  $\sqrt{kr}$ , see Fig. 4);

while  $P_{\max}$  = max. permissible power dissipation, temperature dependent;

$$P_{125} = \text{max. permissible power dissipation at 125 °C} = I_{r0}^2 ESR_{100};$$

$ESR_{\max}$  = max. equivalent series resistance, frequency dependent;

$ESR_{100}$  = max. equivalent series resistance at 100 Hz.

The formula is derived for any temperature and frequency as follows:

$$\begin{aligned} I_{r \max}^2 &= P_{\max}/ESR_{\max} \\ &= kr P_{125}/ESR_{100} \\ &= kr I_{r0}^2 ESR_{100}/ESR_{100} \end{aligned}$$

$$\text{Thus } I_{r \max} = I_{r0} \sqrt{kr}.$$

The values of the temperature multiplier  $\sqrt{k}$  and of  $P_{125}$  have been calculated allowing a capacitor temperature of 138 °C and assuming the values of  $ESR_{\max}$  at 138 °C to be 0,8 times the  $ESR_{\max}$  at 25 °C at all frequencies.

The values of the frequency multiplier  $\sqrt{r}$  have been measured at 25 °C assuming it to be the same at all temperatures.

The power dissipation ( $P_{\max}$ ) has been calculated assuming it to be governed by the simplified relation:

$$P_{\max} = \beta \times S \times \Delta T,$$

where  $\beta$  = heat transfer coefficient, taken as 9,0 W/m<sup>2</sup>K;

$S$  = capacitor outer surface;

$\Delta T$  = temperature difference between capacitor surface and the ambient atmosphere, taken as 13 °C at  $T_{\text{amb}} = 125$  °C.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$ ,  
at  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2 (max. 0,1 CU)

D.C. leakage current during continuous operation at  $U_R$ ,  
at  $T_{amb} = 25\text{ }^\circ\text{C}$   
at  $T_{amb} = 85\text{ }^\circ\text{C}$   
at  $T_{amb} = 125\text{ }^\circ\text{C}$

approx. 0,5 x value stated in Table 2  
approx. 2 x value stated in Table 2  
approx. 7 x value stated in Table 2

D.C. leakage current during continuous operation at 40 V,  
 $T_{amb} = 125\text{ }^\circ\text{C}$  (only applicable to 50 V range)

approx. 2 x value stated in Table 2

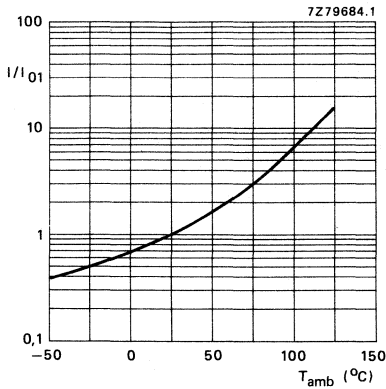


Fig. 5 Multiplier  $I/I_{01}$  as a function of ambient temperature.  $I_{01}$  = d.c. leakage current during continuous operation at  $U_R$ ,  $T_{amb} = 25\text{ }^\circ\text{C}$ .

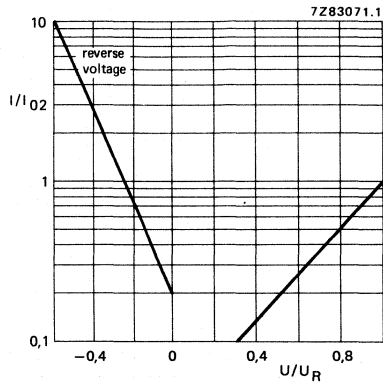


Fig. 6 Multiplier  $I/I_{02}$  as a function of  $U/U_R$ .  $I_{02}$  = d.c. leakage current at  $U_R$  at a discrete constant temperature.

**Tan  $\delta$  (dissipation factor)**

Maximum  $\tan \delta$  at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Typical  $\tan \delta$  at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$

approx. 0,6 x value stated in Table 2

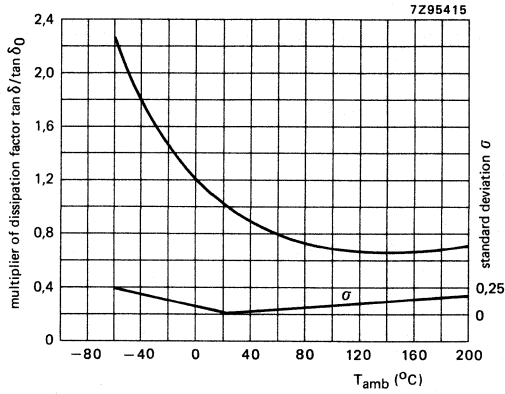


Fig. 7 Multiplier of dissipation factor as a function of ambient temperature;  $\tan \delta_0$  = dissipation factor at  $25 \text{ }^\circ\text{C}$ , 100 Hz.

**Equivalent series resistance ( $ESR = \tan \delta / \omega C$ )**

Maximum ESR at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$  (calculated from maximum  $\tan \delta$  and 0,8 x nominal capacitance)

see Table 2

**Impedance**

Maximum impedance at 100 kHz, and  $T_{amb} = 25 \text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

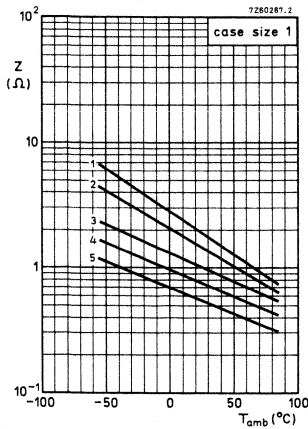


Fig. 8 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 2,2  $\mu\text{F}$ , 40 V;  
 curve 2 = 4,7  $\mu\text{F}$ , 25 V;  
 curve 3 = 10  $\mu\text{F}$ , 16 V;  
 curve 4 = 15  $\mu\text{F}$ , 10 V;  
 curve 5 = 22  $\mu\text{F}$ , 6,3 V.

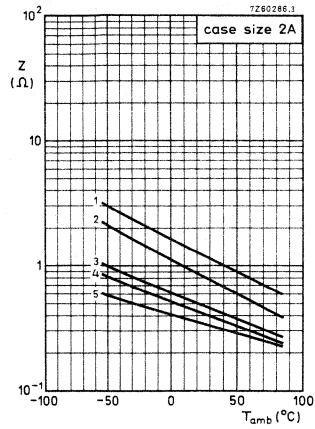


Fig. 9 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 4,7  $\mu\text{F}$ , 40 V;  
 curve 2 = 10  $\mu\text{F}$ , 25 V;  
 curve 3 = 15  $\mu\text{F}$ , 16 V;  
 curve 4 = 33  $\mu\text{F}$ , 10 V;  
 curve 5 = 47  $\mu\text{F}$ , 6,3 V.

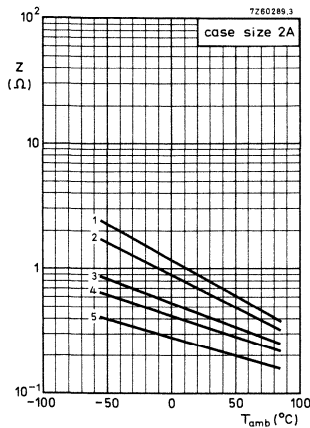


Fig. 10 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 10  $\mu\text{F}$ , 40 V;  
 curve 2 = 22  $\mu\text{F}$ , 25 V;  
 curve 3 = 33  $\mu\text{F}$ , 16 V;  
 curve 4 = 47  $\mu\text{F}$ , 10 V;  
 curve 5 = 68  $\mu\text{F}$ , 6,3 V.

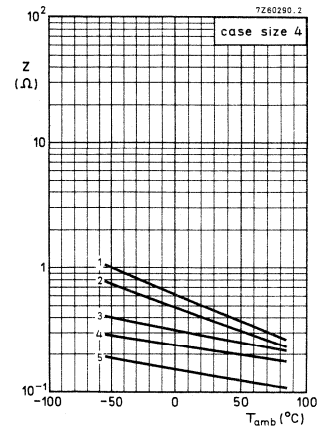


Fig. 11 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 22  $\mu\text{F}$ , 40 V;  
 curve 2 = 33  $\mu\text{F}$ , 25 V;  
 curve 3 = 47  $\mu\text{F}$ , 16 V;  
 curve 4 = 100  $\mu\text{F}$ , 10 V;  
 curve 5 = 150  $\mu\text{F}$ , 6,3 V.

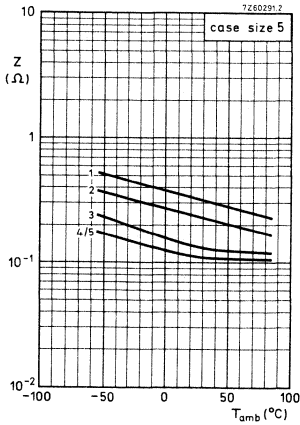


Fig. 12 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 33  $\mu$ F, 40 V;  
 curve 2 = 47  $\mu$ F, 25 V;  
 curve 3 = 68  $\mu$ F, 16 V;  
 curve 4 = 150  $\mu$ F, 10 V;  
 curve 5 = 220  $\mu$ F, 6,3 V.

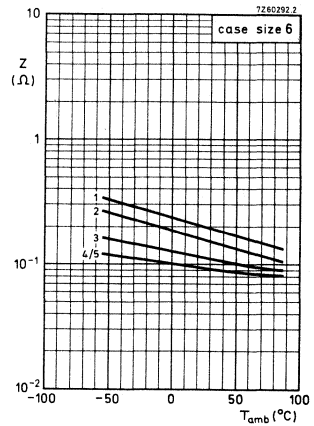


Fig. 13 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 47  $\mu$ F, 40 V;  
 curve 2 = 68  $\mu$ F, 25 V;  
 curve 3 = 100  $\mu$ F, 16 V;  
 curve 4 = 220  $\mu$ F, 10 V;  
 curve 5 = 330  $\mu$ F, 6,3 V.

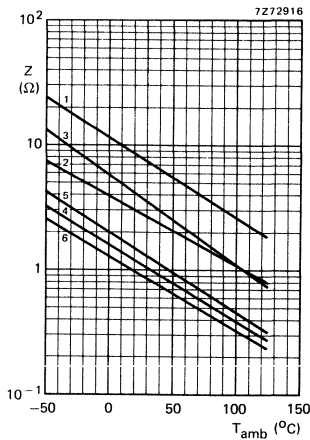


Fig. 14 Typical impedance as a function of temperature at 100 kHz.

Curve 1 = 2,2  $\mu$ F, 50 V;  
 curve 2 = 4,7  $\mu$ F, 50 V;  
 curve 3 = 6,8  $\mu$ F, 50 V;  
 curve 4 = 15  $\mu$ F, 50 V;  
 curve 5 = 22  $\mu$ F, 50 V;  
 curve 6 = 33  $\mu$ F, 50 V.

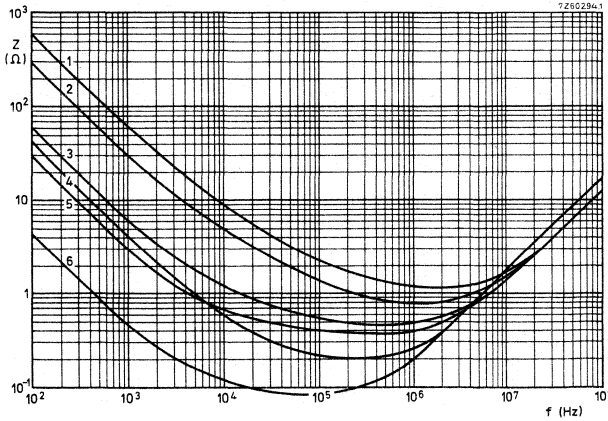


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

- |  |   |
|--|---|
| Curve 1 = $2,2\text{ }\mu\text{F}$ , 40 V; | curve 4 = $47\text{ }\mu\text{F}$ , 40 V;   |
| curve 2 = $4,7\text{ }\mu\text{F}$ , 40 V; | curve 5 = $47\text{ }\mu\text{F}$ , 6,3 V;  |
| curve 3 = $22\text{ }\mu\text{F}$ , 6,3 V; | curve 6 = $330\text{ }\mu\text{F}$ , 6,3 V. |

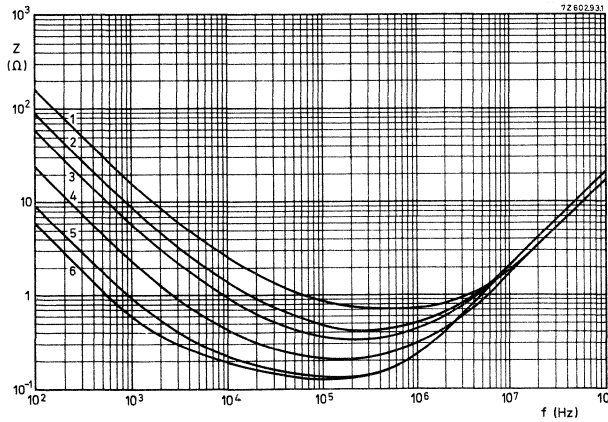


Fig. 16 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

- |   |   |
|---|---|
| Curve 1 = $10\text{ }\mu\text{F}$ , 40 V; | curve 4 = $68\text{ }\mu\text{F}$ , 6,3 V;  |
| curve 2 = $22\text{ }\mu\text{F}$ , 40 V; | curve 5 = $150\text{ }\mu\text{F}$ , 6,3 V; |
| curve 3 = $33\text{ }\mu\text{F}$ , 40 V; | curve 6 = $220\text{ }\mu\text{F}$ , 6,3 V. |

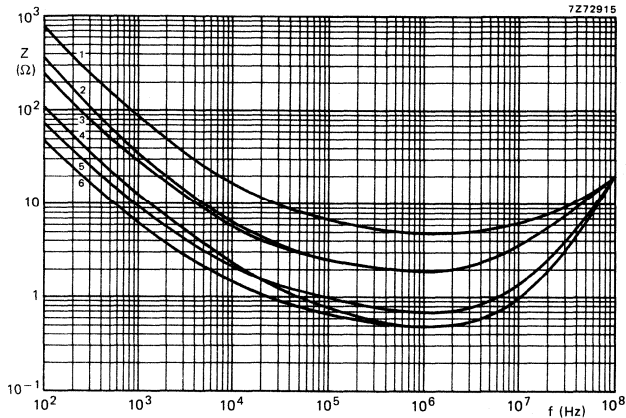


Fig. 17 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

- Curve 1 = 2,2  $\mu\text{F}$ , 50 V;
- Curve 2 = 4,7  $\mu\text{F}$ , 50 V;
- Curve 3 = 6,8  $\mu\text{F}$ , 50 V;
- Curve 4 = 15  $\mu\text{F}$ , 50 V;
- Curve 5 = 22  $\mu\text{F}$ , 50 V;
- Curve 6 = 33  $\mu\text{F}$ , 50 V.

**Equivalent series inductance (ESL)**

Equivalent series inductance, measured by means of a four-terminal circuit (Thomson circuit), at 10 MHz; the capacitor leads bent to the pitch as indicated

|              | pitch   | max. ESL | typ. ESL    |
|--------------|---------|----------|-------------|
| case size 1  | 20,3 mm | 30 nH    | 15 to 23 nH |
| case size 2A | 25,4 mm | 30 nH    | 16 to 24 nH |
| case size 4  | 27,9 mm | 35 nH    | 20 to 27 nH |
| case size 5  | 35,6 mm | 40 nH    | 26 to 33 nH |
| case size 6  | 35,6 mm | 55 nH    | 41 to 49 nH |



**OPERATIONAL DATA**

|   |                         |
|---|-------------------------|
| Category temperature range, 6,3 V to 40 V ranges                              | -55 to + 125 °C         |
| Category temperature range, 50 V range<br>for rated voltage                   | -55 to + 85 °C          |
| for derated voltage (40 V)  | -55 to + 125 °C         |
| Usable temperature range  | -80 to + 200 °C         |
| Typical life time, 6,3 V to 40 V ranges                                       |                         |
| at $T_{amb} = 125\text{ °C}$ and $U_R$  | > 20 000 h              |
| at $T_{amb} = 150\text{ °C}$ and $U_R$  | > 5 000 h               |
| at $T_{amb} = 175\text{ °C}$ and $U_R$  | > 2 000 h               |
| Typical life time, 50 V range   |                         |
| at $T_{amb} = 85\text{ °C}$ and $U_R$   | > 10 000 h              |
| at $T_{amb} = 125\text{ °C}$ and derated voltage (40 V)                       | > 10 000 h              |
| Field failure rate  | $< 1 \times 10^{-9}/h$  |
| Typical parameter change after endurance<br>test at $T_{amb} = 125\text{ °C}$ | see Figs. 18, 19 and 20 |

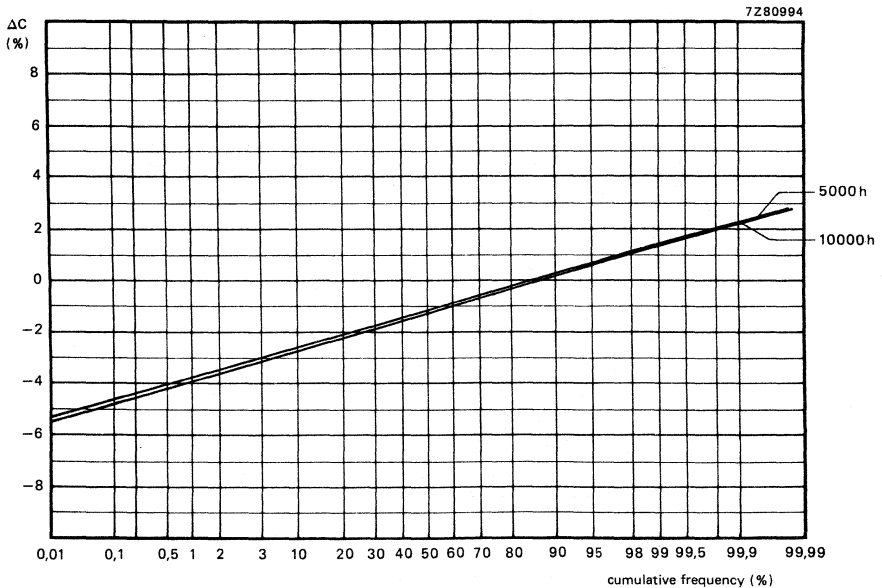


Fig. 18 Change of capacitance after endurance test.

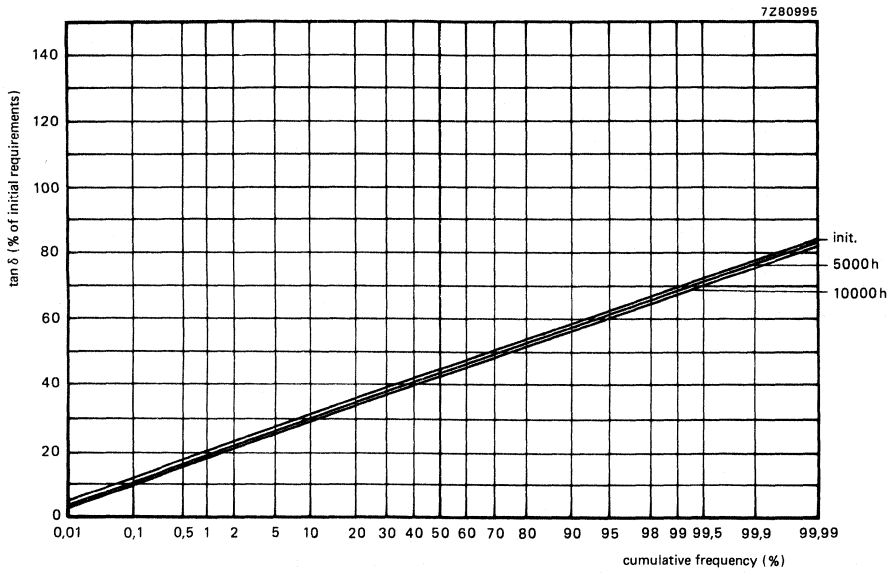


Fig. 19  $\tan \delta$  after endurance test.

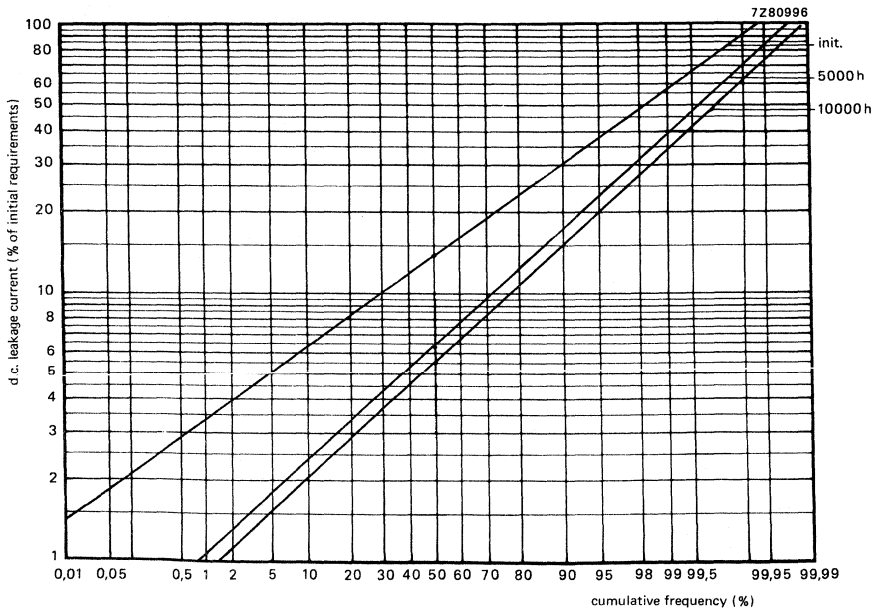


Fig. 20 D.C. leakage current after endurance test.

**PACKING**

The capacitors are supplied on bandoliers in boxes or on reels, (according to IEC 286-1).  
The number of capacitors per box or per reel is shown in Table 7.

**Table 7**

| case size | number of capacitors |          |
|-----------|----------------------|----------|
|           | per box              | per reel |
| 1         | 100                  | 1000     |
| 2A        | 100                  | 1000     |
| 4         | 100                  | 500      |
| 5         | 100                  | 500      |
| 6         | 100                  | 400      |

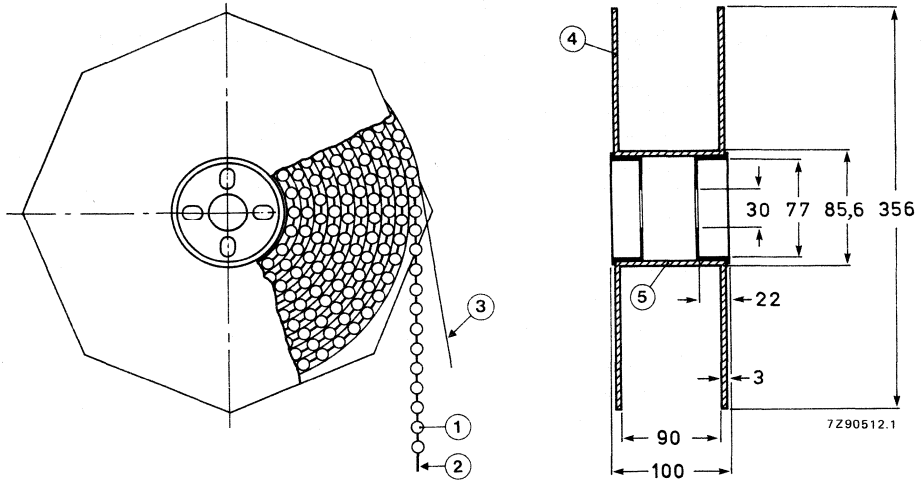


Fig. 21 Capacitors on bandoliers on reel.

- 1 = capacitor
- 2 = bandolier
- 3 = paper
- 4 = flange
- 5 = cylinder

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under solid aluminium capacitors, with the addition of the following tests.

*Severe rapid change of temperature test:* 100 cycles of 15 min at  $-40\text{ }^{\circ}\text{C}$  and  $+125\text{ }^{\circ}\text{C}$ .

Requirements: d.c. leakage current  $\leq$  stated limit,  
 $\tan \delta \leq 1,6 \times$  stated limit,  
 impedance  $\leq 1,6 \times$  stated limit,  
 $\Delta C/C \leq 10\%$ .

*Solvent resistance tests:*

Severity 1, according to MIL-STD-202, method 215, including brushing of all portions of the specimens.

Solvents: – deionized water ( $50 \pm 5\text{ }^{\circ}\text{C}$ );  
 – 1.1.1. trichloro-ethane;  
 – mixture of 25 vol.% 2-propanol (isopropanol) and 75 vol.% mineral spirits.

Severity 2, according to IEC 68-2-45, and IEC 653, test XA with the following details and additions.

Conditions: immersion time of samples 5 min., at ambient temperature, at boiling temperature, in vapour of boiling solvent, and ultrasonic (40 kHz).

Solvents: – deionized water ( $50 \pm 5\text{ }^{\circ}\text{C}$ );  
 – calgonite solution (20 g/l,  $70 \pm 5\text{ }^{\circ}\text{C}$ ), a dishwasher detergent;  
 – mixture of 4,5% 2-butoxyethanol, 4,5% 2-amino-ethanol, and 91% water ( $70 \pm 5\text{ }^{\circ}\text{C}$ );  
 – 1.1.1. trichloro-ethane;  
 – mixtures of 1.1.2-trichloro- 1.2.2-trifluoro-ethane (fluorocarbon 113) and the following solvents in the respective mass percentage ratios of these solvents to fluorocarbon:  
 ● 2-propanol (isopropanol), 25%: 75% (Arklone K\*); up to the ratio 35%: 65%;  
 ● ethanol, 4,5%: 95,5% (e.g. Arklone A\*, Freon TE\*\*);  
 ● methanol and nitromethane, 5,7%: 0,3%: 94% (Freon TMS\*\*).

Requirement: visual appearance not affected.

Note: Tests are carried out using non-contaminated solvents.

\* Trade mark of I.C.I.

\*\* Trade mark of Dupont de Nemours.

*Severe vibration tests (for epoxy-filled version only):* according to IEC68-2-6 and MIL-STD-202, method 204, letters E and F, with the following details and additions.

- a. Method of mounting: clamping both the body and the leads.
- b. Severity:
- |                    |                 |
|--------------------|-----------------|
| 1. frequency range | : 10 - 3000 Hz; |
| temperature        | : 20 - 25 °C;   |
| 2. frequency range | : 50 - 2000 Hz; |
| temperature        | : 125 °C.       |
- 1 and 2. vibration amplitude: 50g or 3,5 mm, whichever is less.
- c. Direction and duration motion:
- |              |  |
|--------------|--|
| Severity 1 : | 1 octave/min, 3 directions (mutually perpendicular), 20 sweeps per direction (total 60 sweeps or 18 h);    |
| Severity 2:  | 1 octave/min, 2 directions (longitudinal and transversal), 3 sweeps per direction (total 6 sweeps or 1 h). |
- d. Functioning:
- |            |                          |
|------------|--------------------------|
| severity 1 | : rated voltage applied; |
| severity 2 | : no voltage applied.    |
- e. Requirements:
- |                      |  |
|----------------------|--|
| $\Delta C/C$         | : $\leq 10\%$  |
| $\tan \delta$        | : $\leq 1,2 \times$ stated limit   |
| impedance            | : $\leq 1,4 \times$ stated limit   |
| d.c. leakage current | : $\leq$ stated limit  |
| general              | : no intermittent contacts;<br>no indication of breakdown;<br>no open circuiting;<br>no evidence of mechanical damage. |
- f. Typical capability: up to 80g at 10 to 3000 Hz (also at 125 °C).

*Severe shock tests (for epoxy-filled version only):* according to IEC68-2-27 and MIL-STD-202, method 213, letter F, with the following details and additions.


- a. Method of mounting: clamping both the body and the leads.
- b. Pulse shape: half-sine or sawtooth.
- c. Severity:
- |            |   |
|------------|---|
| 1. 1500g,  | 0,5 ms (MIL-STD-202, method 213, letter F); |
| 2. 3000g,  | 0,2 ms;                                     |
| 3. 10000g, | 0,1 ms;                                     |
- d. Direction and number of shocks:
- |                   |   |
|-------------------|---|
| severity 1 and 2: | 3 successive shocks in each direction of 3 mutually perpendicular axes (total 18 shocks); |
| severity 3:       | 1 shock, any direction.   |
- e. Functioning: rated voltage applied.
- f. Requirements: see "Severe vibration tests" par. e.
- g. Typical capability:  $\geq 100000g$ ; these shock tests can be preceded by severe vibration tests on the same samples.



## SOLID ALUMINIUM CAPACITORS



- Miniature type
- Single ended
- Resin dipped
- Long life
- No derating at maximum temperature
- General and industrial applications



## QUICK REFERENCE DATA

Nominal capacitance range (E6 series)

0,1 to 68  $\mu\text{F}$ 

Tolerance on nominal capacitance

 $\pm 20\%$  ( $\pm 10\%$  to special order)Rated voltage range,  $U_R$  (R5 series)

6,3 to 40 V

Category temperature range

 $-55$  to  $+125$   $^{\circ}\text{C}$ 

Usable temperature range

 $-55$  to  $+175$   $^{\circ}\text{C}$ 

Endurance test

at 85  $^{\circ}\text{C}$ 

5000 h

at 125  $^{\circ}\text{C}$ 

2000 h

Basic specification

IEC 384-4, long-life grade

Climatic category, IEC 68

DIN 40040

NF C20-600

55/125/56

FKD/KQ/SV

434

Approvals

CECC 30 302-002

Liste LNZ 44-04 COS-B

Gam-t-1

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |     |
|-----------------------------------|-----------|----|----|----|----|-----|
|                                   | 6,3       | 10 | 16 | 25 | 35 | 40* |
| 0,1                               |           |    |    |    |    | 1   |
| 0,15                              |           |    |    |    |    | 1   |
| 0,22                              |           |    |    |    |    | 1   |
| 0,33                              |           |    |    |    |    | 1   |
| 0,47                              |           |    |    |    |    | 2   |
| 0,68                              |           |    |    | 1  |    | 2   |
| 1                                 |           |    |    | 1  | 2  | 3   |
| 1,5                               |           |    |    | 1  |    | 4   |
| 2,2                               |           |    | 1  | 2  |    | 4   |
| 3,3                               |           |    | 1  | 2  |    |     |
| 4,7                               |           | 1  | 2  | 3  |    |     |
| 6,8                               |           | 1  | 2  | 4  |    |     |
| 10                                | 1         | 2  | 3  | 4  |    |     |
| 15                                | 2         | 2  | 4  |    |    |     |
| 22                                | 2         | 3  |    |    |    |     |
| 33                                | 3         | 4  |    |    |    |     |
| 47                                | 4         |    |    |    |    |     |
| 68                                | 4         |    |    |    |    |     |

| case size | maximum dimensions (mm) |
|-----------|-------------------------|
| 1         | 12,5 x 8 x 3,5          |
| 2         | 12,5 x 8 x 4,5          |
| 3         | 12,5 x 8 x 5            |
| 4         | 12,5 x 8 x 6            |

\* Up to 85  $^{\circ}\text{C}$ ; from 85 to 125  $^{\circ}\text{C}$  this value is 25 V.

**APPLICATION**

Especially for filtering, smoothing, coupling and decoupling purposes in general and industrial applications. These capacitors utilize advanced technology to achieve long life, high reliability, high stability and low temperature dependence.

The capacitors have a very low and stable leakage current, small dimensions and a fixed pitch of 5 mm.

→ The taped versions are suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

This capacitor is of a construction with a highly etched aluminium plate anode, aluminium oxide as a dielectric and a solid cathode. The capacitor is coated with an orange synthetic resin. The terminal leads are brought out on one side.

→ The capacitor is available in four styles, all with soldered-copper leads:

style 1: with short leads,


style 2: with long leads of which the anode lead has a flattened area at the end,

style 3: with long leads (without flattened area) on tape on reel, positive leading,

style 4: with long leads (without flattened area) on tape in ammunition pack.

**MECHANICAL DATA**

Dimensions in mm\*

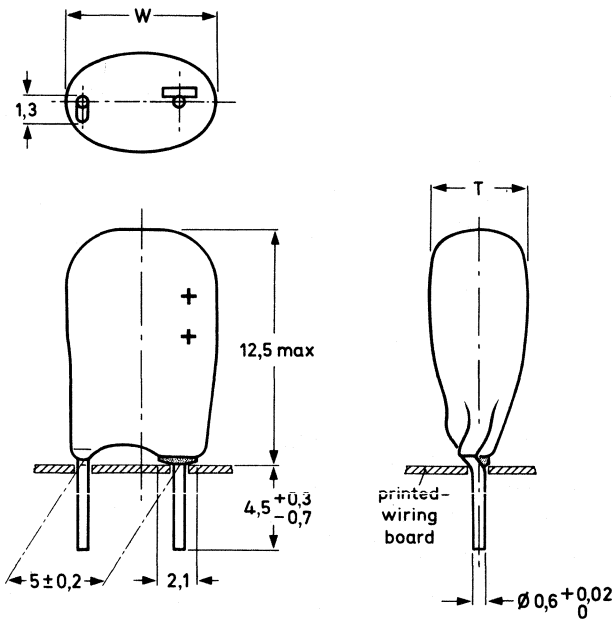

7268430.6

Fig. 1 Style 1; see Table 1a for dimensions T and W.

Note: Capacitors with other lead lengths are available to special order.

\* Measured according to IEC 717.




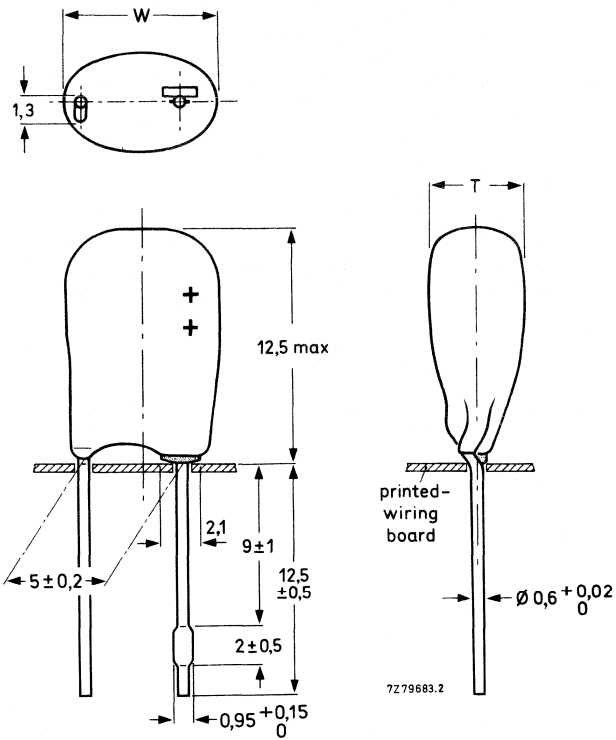


Fig. 2 Style 2; see Table 1a for dimensions T and W.

Table 1a

| case size | $T_{max}$ | $W_{max}$ | mass g |
|-----------|-----------|-----------|--------|
| 1         | 3,5       | 8         | 0,30   |
| 2         | 4,5       | 8         | 0,35   |
| 3         | 5         | 8         | 0,50   |
| 4         | 6         | 8         | 0,60   |

Note: A kink in the cathode lead avoids solder wetting problems of the lacquer dipped leads. The lacquer is so applied that it cannot pass beyond the centre of the kink, thus ensuring a clean surface of the part of the lead in the printed-wiring board hole. (Also suitable for use in plated-through holes).

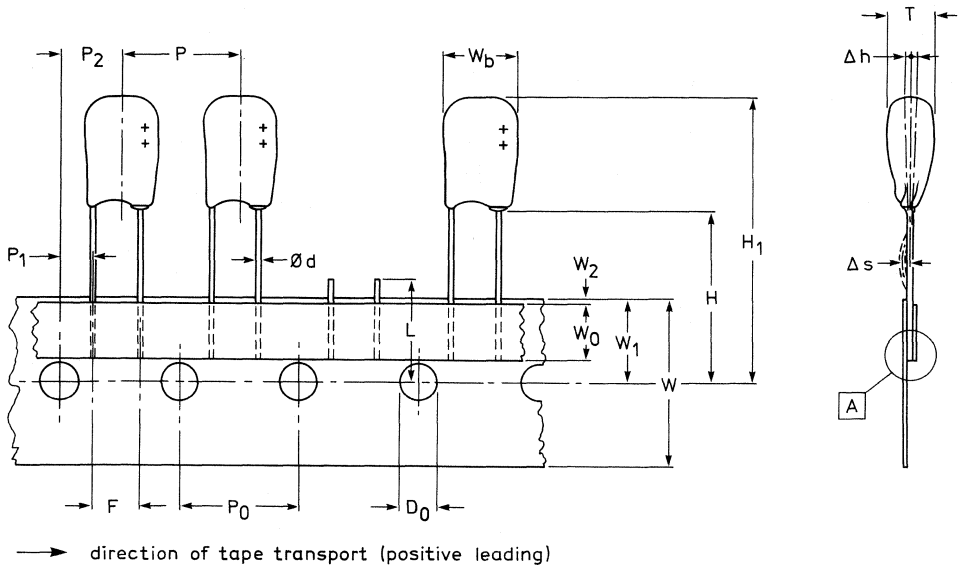

→ Fig. 3 Styles 3 and 4; see Table 1b for dimensions.

7285985.2




Table 1b

|                                      | symbol     | value       | tolerance    | remarks                                   |
|--------------------------------------|------------|-------------|--------------|---|
| Body thickness                       | T          | 3,5-4,5-5-6 | max.         | for case sizes 1, 2, 3 and 4 respectively |
| Body width                           | $W_b$      | 8           | max.         |   |
| Component alignment                  | $\Delta h$ | 0           | $\pm 1$      |   |
| Lead-wire diameter                   | d          | 0,6         | $+ 0,02/-0$  |   |
| Lead straightness                    | $\Delta s$ | 0           | $\pm 0,2$    |   |
| Length of snipped leads              | L          | 11          | max.         |   |
| Lead-to-lead distance                | F          | 5           | $+ 0,4/-0,2$ |   |
| Pitch of components                  | P          | 12,7        | $\pm 1$      |   |
| Feed-hole pitch                      | $P_0$      | 12,7        | $\pm 0,2$    | *   |
| Feed-hole centre to lead             | $P_1$      | 3,85        | $\pm 0,5$    |   |
| Feed-hole centre to component centre | $P_2$      | 6,35        | $\pm 1$      |   |
| Feed-hole diameter                   | $D_0$      | 4           | $\pm 0,2$    |   |
| Height of component from tape centre | H          | 18,5        | $\pm 0,5$    |   |
| Component height                     | $H_1$      | 32          | max.         |   |
| Tape width                           | W          | 18          | $\pm 0,5$    |   |
| Hold-down tape width                 | $W_0$      | 6           | $\pm 0,5$    | Feed hole shall be free                   |
| Hole position                        | $W_1$      | 9           | $+ 0,5/-0,2$ |   |
| Hold-down tape position              | $W_2$      | 0,5         | $+ 0,5/-0,2$ |   |
| Total tape thickness                 | t          | 0,9         | max.         |   |

\* Cumulative pitch error:  $\pm 0,5$  mm/4 pitches, and  $\pm 1$  mm/20 pitches.

**Marking**

The capacitors are marked with: nominal capacitance, rated voltage, "+" signs to identify the anode terminal, tolerance code (M =  $\pm 20\%$ , K =  $\pm 10\%$ ), date code (year and month) and name of manufacturer.

**Mounting**





The diameter of the mounting holes in the printed-wiring board is  $0,8 \pm 0,1$  mm, except that of the hole for the anode lead of style 2 capacitors: 1,3–0,2 mm.

When bending, cutting or straightening the leads, ensure that the capacitor body is relieved of stress.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 93 to 106 kPa and a relative humidity of 45 to 75%. See also the corresponding paragraphs.

**Table 2**

| UR* | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 125\text{ }^\circ\text{C}$ , no d.c. voltage applied mA | max. d.c. leakage current ( $\mu\text{A}$ )** at UR after |       | max. $\tan \delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz** $\Omega$ | case size | catalogue number 2222 122 followed by   |   |   |  |
|-----|-------------------------|---|---|-------|--------------------|-------------------|--------------------------------------|-----------|---|---|---|--|
|     |                         |   | 15 s  | 1 min |                    |                   |                                      |           | style 1  | style 2  | on reel style 3  | in ammpack style 4  |
| 6,3 | 10                      | 9   | 1,6   | 0,6   | 0,15               | 30                | 5                                    | 1         | 53109   | 73109   | 23109   | 33109  |
|     | 15                      | 13  | 2,4   | 0,9   | 0,15               | 20                | 3                                    | 2         | 53159   | 73159   | 23159   | 33159  |
|     | 22                      | 20  | 3,5   | 1,4   | 0,15               | 14                | 1,3                                  | 2         | 53229   | 73229   | 23229   | 33229  |
|     | 33                      | 30  | 5,2   | 2,1   | 0,15               | 9                 | 0,9                                  | 3         | 53339   | 73339   | 23339   | 33339  |
|     | 47                      | 42  | 7,4   | 3,0   | 0,15               | 6,4               | 0,7                                  | 4         | 53479   | 73479   | 23479   | 33479  |
|     | 68                      | 61  | 10,7  | 4,3   | 0,15               | 4,4               | 0,5                                  | 4         | 53689   | 73689   | 23689   | 33689  |
| 10  | 4,7                     | 7   | 1,2   | 0,5   | 0,15               | 64                | 7                                    | 1         | 54478   | 74478   | 24478   | 34478  |
|     | 6,8                     | 10  | 1,7   | 0,7   | 0,15               | 44                | 5                                    | 1         | 54688   | 74688   | 24688   | 34688  |
|     | 10                      | 14  | 2,5   | 1,0   | 0,15               | 30                | 1,5                                  | 2         | 54109   | 74109   | 24109   | 34109  |
|     | 15                      | 21  | 3,8   | 1,5   | 0,15               | 20                | 1                                    | 2         | 54159   | 74159   | 24159   | 34159  |
|     | 22                      | 31  | 5,5   | 2,2   | 0,15               | 14                | 0,7                                  | 3         | 54229   | 74229   | 24229   | 34229  |
|     | 33                      | 47  | 8,3   | 3,3   | 0,15               | 9                 | 0,5                                  | 4         | 54339   | 74339   | 24339   | 34339  |
| 16  | 2,2                     | 5   | 0,9   | 0,4   | 0,10               | 91                | 10                                   | 1         | 55228   | 75228   | 25228   | 35228  |
|     | 3,3                     | 8   | 1,3   | 0,5   | 0,10               | 61                | 7                                    | 1         | 55338   | 75338   | 25338   | 35338  |
|     | 4,7                     | 11  | 1,9   | 0,8   | 0,10               | 43                | 2                                    | 2         | 55478   | 75478   | 25478   | 35478  |
|     | 6,8                     | 16  | 2,7   | 1,1   | 0,10               | 29,5              | 1,5                                  | 2         | 55688   | 75688   | 25688   | 35688  |
|     | 10                      | 23  | 4,0   | 1,6   | 0,10               | 20                | 1                                    | 3         | 55109   | 75109   | 25109   | 35109  |
|     | 15                      | 34  | 6,0   | 2,4   | 0,10               | 13,5              | 0,7                                  | 4         | 55159   | 75159   | 25159   | 35159  |

\* Up to  $T_{\text{amb}} = 125\text{ }^\circ\text{C}$ .

\*\* Versions with lower values of max. d.c. leakage current or max. impedance are available to special order.

| UR*  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$ , no d.c. voltage applied | max. d.c. leakage current ( $\mu\text{A}$ )** |       | max. tan $\delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz** $\Omega$ | case size | catalogue number 2222 122 followed by |         |                 |                    |       |
|------|-------------------------|--|---|-------|-------------------|-------------------|--------------------------------------|-----------|---------------------------------------|---------|-----------------|--------------------|-------|
|      |                         |  | 15 s  | 1 min |                   |                   |                                      |           | style 1                               | style 2 | on reel style 3 | in ammpack style 4 |       |
| 25   | 0,68                    | 2  | 0,4   | 0,2   | 0,10              | 295               | 30                                   | 1         | 56687                                 | 76687   | 26687           | 36687              |       |
|      | 1,0                     | 4  | 0,6   | 0,3   | 0,10              | 200               | 20                                   | 1         | 56108                                 | 76108   | 26108           | 36108              |       |
|      | 1,5                     | 5  | 0,9   | 0,4   | 0,10              | 135               | 15                                   | 1         | 56158                                 | 76158   | 26158           | 36158              |       |
|      | 2,2                     | 8  | 1,4   | 0,6   | 0,10              | 91                | 10                                   | 2         | 56228                                 | 76228   | 26228           | 36228              |       |
|      | 3,3                     | 12   | 2,1   | 0,8   | 0,10              | 61                | 7                                    | 2         | 56338                                 | 76338   | 26338           | 36338              |       |
|      | 4,7                     | 17   | 2,9   | 1,2   | 0,10              | 43                | 5                                    | 3         | 56478                                 | 76478   | 26478           | 36478              |       |
|      | 6,8                     | 24   | 4,2   | 1,7   | 0,10              | 29,5              | 3                                    | 4         | 56688                                 | 76688   | 26688           | 36688              |       |
|      | 10                      | 35   | 6,2   | 2,5   | 0,15              | 20                | 2                                    | 4         | 56109                                 | 76109   | 26109           | 36109              |       |
|      | 35                      | 3  | 0,9   | 0,4   | 0,10              | 200               | 15                                   | 2         | 50108                                 | 70108   | 20108           | 30108              |       |
|      | 40▲                     | 0,1  | 0,4   | 0,1   | 0,04              | 0,10              | 1990                                 | 70        | 1                                     | 57107   | 77107           | 27107              | 37107 |
|      |                         | 0,15   | 0,5   | 0,15  | 0,06              | 0,10              | 1330                                 | 50        | 1                                     | 57157   | 77157           | 27157              | 37157 |
|      |                         | 0,22   | 0,8   | 0,22  | 0,88              | 0,10              | 910                                  | 30        | 1                                     | 57227   | 77227           | 27227              | 37227 |
| 0,33 |                         | 1  | 0,33  | 0,13  | 0,10              | 610               | 30                                   | 1         | 57337                                 | 77337   | 27337           | 37337              |       |
| 0,47 |                         | 2  | 0,5   | 0,2   | 0,10              | 430               | 20                                   | 2         | 57477                                 | 77477   | 27477           | 37477              |       |
| 0,68 |                         | 2  | 0,7   | 0,3   | 0,10              | 295               | 15                                   | 2         | 57687                                 | 77687   | 27687           | 37687              |       |
| 1,0  | 4                       | 1,0  | 0,4   | 0,10  | 200               | 10                | 3                                    | 57108     | 77108                                 | 27108   | 37108           |                    |       |
| 1,5  | 5                       | 1,5  | 0,6   | 0,10  | 135               | 7                 | 4                                    | 57158     | 77158                                 | 27158   | 37158           |                    |       |
| 2,2  | 8                       | 2,2  | 0,9   | 0,10  | 91                | 5                 | 4                                    | 57228     | 77228                                 | 27228   | 37228           |                    |       |

\* Up to  $T_{\text{amb}} = 125\text{ }^{\circ}\text{C}$ .

\*\* Versions with lower values of max. d.c. leakage current or max. impedance are available to special order.

▲ Up to  $T_{\text{amb}} = 85\text{ }^{\circ}\text{C}$ ; at  $T_{\text{amb}}$  from 85  $^{\circ}\text{C}$  to 125  $^{\circ}\text{C}$  this value is 25 V.

**Capacitance**

Nominal capacitance values at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$  ( $\pm 10\%$  to special order)

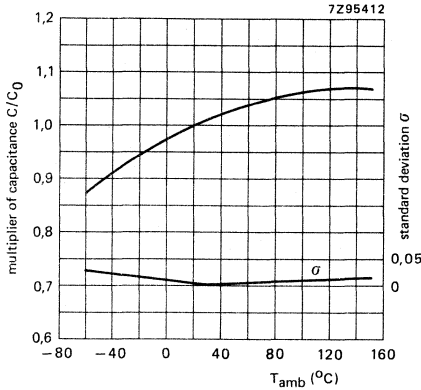


Fig. 4 Typical multiplier of capacitance as a function of ambient temperature.  $C_0$  = capacitance at 25 °C, 100 Hz.

**Voltage**

Rated voltage

6,3 V to 25 V ranges = max. permissible voltage at  $T_{amb} \leq 125\text{ }^{\circ}\text{C}$

$U_R$

40 V range = max. permissible voltage at  $T_{amb} \leq 85\text{ }^{\circ}\text{C}$

$U_R$

Derated voltage

6,3 V to 25 V ranges = max. permissible voltage at  $T_{amb}$  from 125 °C to 175 °C

$0,63 \times U_R$

40 V range = max. permissible voltage at  $T_{amb}$  from 85 °C to 175 °C

$0,63 \times U_R$

Surge voltage = max. permissible voltage for short periods (see also Tests and requirements)

$$1,15 \times U_R$$

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature for short periods (see also Tests and requirements)

$$0,30 \times U_R$$

**Ripple voltage**

Max. permissible a.c. voltage providing the following four conditions are met:

a) Max. a.c. voltage, with negative d.c. voltage applied

$$2 \text{ V}$$

b) Max. peak a.c. voltage, without d.c. voltage applied

| $T_{amb} \leq 85 \text{ }^\circ\text{C}$ | $85 \text{ }^\circ\text{C} < T_{amb} \leq 125 \text{ }^\circ\text{C}$ |
|--|---|
| $0,30 \times U_R$                        | $0,15 \times U_R$   |
| $0,45 \times U_R$                        | $0,22 \times U_R$   |
| $0,60 \times U_R$                        | $0,30 \times U_R$   |
| $0,65 \times U_R$                        | $0,32 \times U_R$   |
| $0,80 \times U_R$                        | $0,40 \times U_R$   |

- at  $f \leq 0,1 \text{ Hz}$
- at  $0,1 \text{ Hz} < f \leq 1 \text{ Hz}$
- at  $1 \text{ Hz} < f \leq 10 \text{ Hz}$
- at  $10 \text{ Hz} < f \leq 50 \text{ Hz}$
- at  $f > 50 \text{ Hz}$

c) Momentary value of applied voltage, with positive d.c. voltage applied

between  $U_R$  (in the positive half wave) and the limits mentioned under b) (in the negative half wave)

d) Ripple voltage limits are not applicable if the maximum ripple current is exceeded. In that case the ripple current is decisive. Whichever is in practice decisive, depends on the actual impedance of the capacitor. In the survey at the end of this data sheet the ripple current and ripple voltage limits can be found for each capacitor.

**Ripple current**

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 125 \text{ }^\circ\text{C}$

see Table 2

Maximum permissible r.m.s. ripple current at other frequencies and temperatures

see survey at the end of this data sheet

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 125 \text{ }^\circ\text{C}$  for capacitors with lower ESR value than the maximum ESR

$$\sqrt{ESR_{max}/ESR_{actual}} \times \text{value stated in Table 2}$$

*Calculation of ripple currents*

The maximum permissible ripple current ( $I_{r \max}$ ) is a function of temperature and frequency:

$$I_{r \max} = I_{r0} \sqrt{kr},$$

where  $I_{r0}$  = max. ripple current at 100 Hz and 125 °C (see Table 2);  
 $\sqrt{k}$  = temperature multiplier (neglecting the frequency dependence) =  $\sqrt{P_{\max}/P_{125}}$ ;  
 $\sqrt{r}$  = frequency multiplier (neglecting the temperature dependence) =  $\sqrt{ESR_{100}/ESR_{\max}}$ ;

while  $P_{\max}$  = max. permissible power dissipation, temperature dependent;  
 $P_{125}$  = max. permissible power dissipation at 125 °C =  $I_{r0}^2 ESR_{100}$ ;  
 $ESR_{\max}$  = max. equivalent series resistance, frequency dependent;  
 $ESR_{100}$  = max. equivalent series resistance at 100 Hz.

The formula is derived for any temperature and frequency as follows:

$$I_{r \max}^2 = P_{\max}/ESR_{\max}$$

$$= kr P_{125}/ESR_{100}$$

$$= kr I_{r0}^2 ESR_{100}/ESR_{100}$$

Thus  $I_{r \max} = I_{r0} \sqrt{kr}$ .

The values of the temperature multiplier  $\sqrt{k}$  and of  $P_{125}$  have been calculated allowing a capacitor temperature of 138 °C and assuming the values of  $ESR_{\max}$  at 138 °C to be 0,8 x or 1,05 x the  $ESR_{\max}$  at 25 °C at all frequencies for case sizes 1 to 3 or case size 4 respectively.

The values of the frequency multiplier  $\sqrt{r}$  have been measured at 25 °C assuming it to be the same at all temperatures.

The power dissipation ( $P_{\max}$ ) has been calculated assuming it to be governed by the simplified relation:

$$P_{\max} = \beta \times S \times \Delta T,$$

where  $\beta$  = heat transfer coefficient, taken as 18 W/m<sup>2</sup>K (capacitor mounted on a thermally well-conducting printed-circuit board, in free flowing air, the board being in vertical position);  
 $S$  = capacitor outer surface;  
 $\Delta T$  = temperature difference between capacitor surface and the ambient atmosphere, taken as 13 °C at  $T_{\text{amb}} = 125$  °C.

→ For case sizes 1 to 3  $P_{125} = 45$  mW, for case size 4  $P_{125} = 65$  mW.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit. (See also Tests and Requirements).



**D.C. leakage current**

Maximum d.c. leakage current 15 s after application of  $U_R$ , at  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2 (0,025 CU or 0,1  $\mu\text{A}$  whichever is greater)

Maximum d.c. leakage current 1 min after application of  $U_R$ , at  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2 (0,01 CU or 0,04  $\mu\text{A}$  whichever is greater)

Typical d.c. leakage current 15 s or 1 min after application of  $U_R$ , at  $T_{amb} = 25\text{ }^\circ\text{C}$   
 6,3 V to 16 V ranges  
 25 V to 40 V ranges

approx. 0,2 x value stated in Table 2  
 approx. 0,1 x value stated in Table 2

Typical d.c. leakage current during continuous operation at  $U_R$   
 at  $T_{amb} = 25\text{ }^\circ\text{C}$   
 at  $T_{amb} = 85\text{ }^\circ\text{C}$   
 at  $T_{amb} = 125\text{ }^\circ\text{C}$

approx. 0,02 x 15 s-value stated in Table 2  
 approx. 0,1 x 15 s-value stated in Table 2  
 approx. 0,3 x 15 s-value stated in Table 2

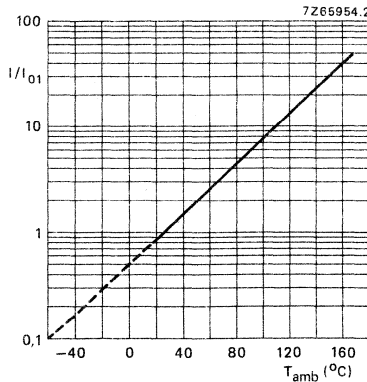


Fig. 5 Typical multiplier  $I/I_{01}$  as a function of ambient temperature;  $I_{01}$  = d.c. leakage current during continuous operation at  $U_R$ ,  $T_{amb} = 25\text{ }^\circ\text{C}$ .

**Tan  $\delta$  (dissipation factor)**

Maximum  $\tan \delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Typical  $\tan \delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

0,05

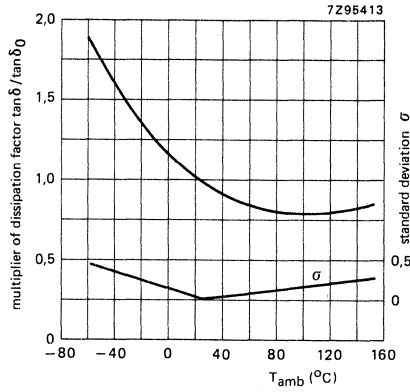


Fig. 6 Typical multiplier of dissipation factor as a function of temperature;  $\tan \delta_0$  = dissipation factor at  $T_{amb} = 25\text{ }^\circ\text{C}$ , 100 Hz.

Equivalent series resistance ( $ESR = \tan \delta / \omega C$ )

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$  (calculated from maximum  $\tan \delta$  and 0,8 x nominal capacitance)

Maximum ESR at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

equal to values of max. impedance at 100 kHz, see Table 2 ←

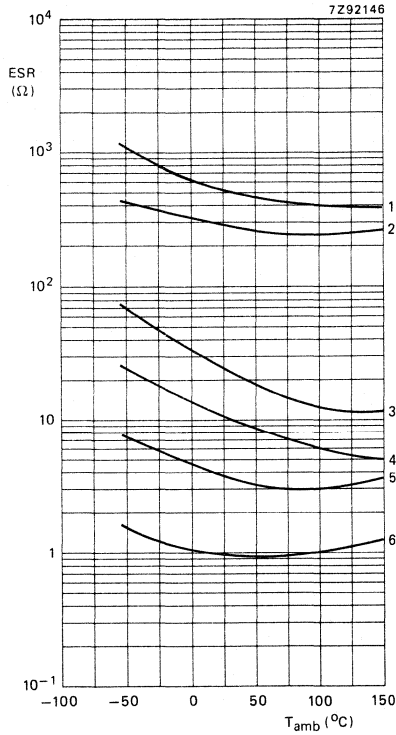


Fig. 7 Typical ESR as a function of ambient temperature at 100 Hz.

Curve 1 = 0,1 μF, 40 V;

curve 2 = 1,5 μF, 40 V;

curve 3 = 3,3 μF, 25 V;

curve 4 = 10 μF, 6,3 V;

curve 5 = 22 μF, 10 V;

curve 6 = 68 μF, 6,3 V.



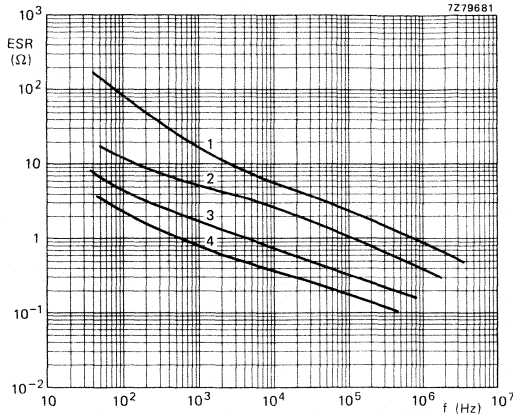


Fig. 10 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 3.  
Curve 1 = 1  $\mu\text{F}$ , 40 V; curve 3 = 10  $\mu\text{F}$ , 16 V;  
curve 2 = 4,7  $\mu\text{F}$ , 25 V; curve 4 = 33  $\mu\text{F}$ , 6,3 V.

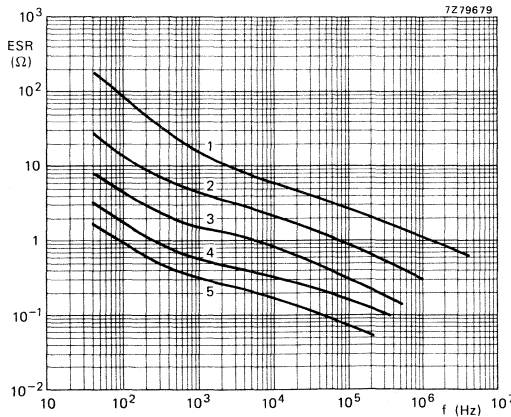


Fig. 11 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 4.  
Curve 1 = 1,5  $\mu\text{F}$ , 40 V; curve 4 = 33  $\mu\text{F}$ , 10 V;  
curve 2 = 6,8  $\mu\text{F}$ , 25 V; curve 5 = 68  $\mu\text{F}$ , 6,3 V;  
curve 3 = 15  $\mu\text{F}$ , 16 V;

**Impedance**

Maximum impedance at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

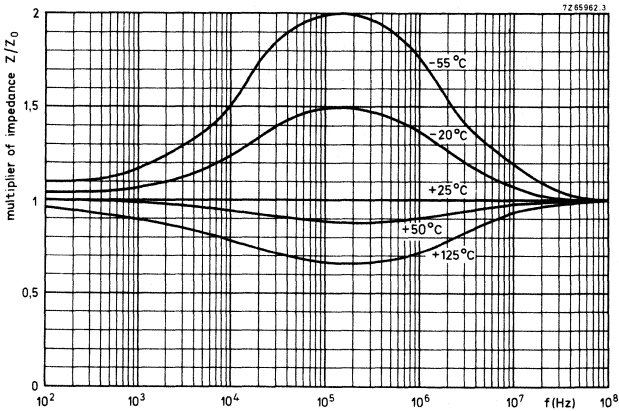


Fig. 12 Typical multiplier of impedance  $Z/Z_0$  as a function of frequency at different temperatures;  $Z_0$  = impedance initial value at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

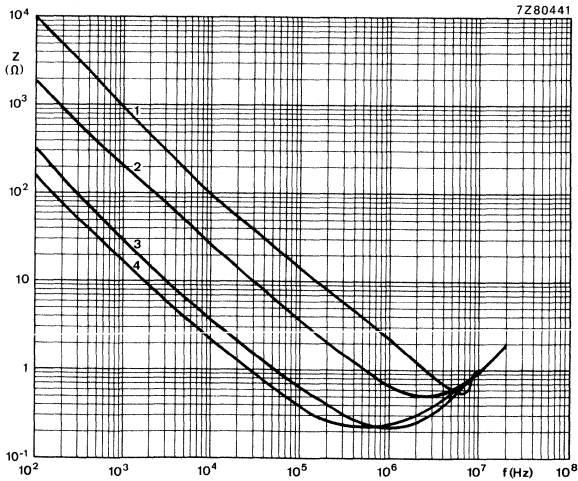


Fig. 13 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 1.

Curve 1 =  $0,15\ \mu\text{F}$ ,  $40\ \text{V}$ ;  
 curve 2 =  $0,68\ \mu\text{F}$ ,  $25\ \text{V}$ ;

curve 3 =  $4,7\ \mu\text{F}$ ,  $10\ \text{V}$ ;  
 curve 4 =  $10\ \mu\text{F}$ ,  $6,3\ \text{V}$ .

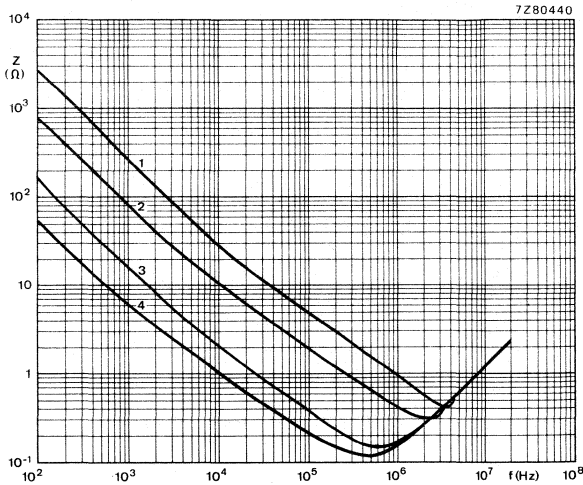


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 2.

Curve 1 =  $0,47\text{ }\mu\text{F}$ , 40 V;  
 curve 2 =  $2,2\text{ }\mu\text{F}$ , 25 V;

curve 3 =  $10\text{ }\mu\text{F}$ , 10 V;  
 curve 4 =  $22\text{ }\mu\text{F}$ , 6,3 V.

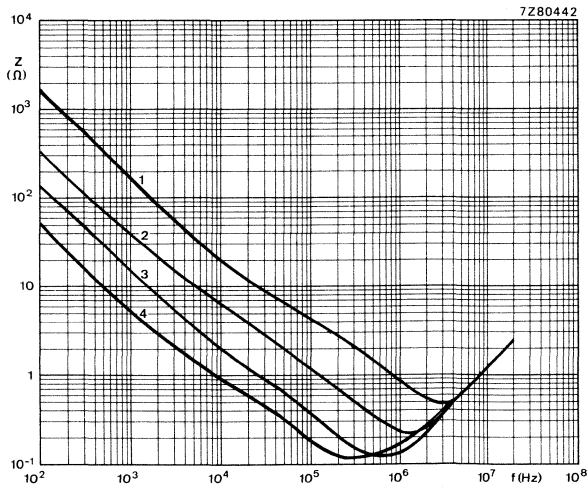


Fig. 15 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 3.

Curve 1 =  $1\text{ }\mu\text{F}$ , 40 V;  
 curve 2 =  $4,7\text{ }\mu\text{F}$ , 25 V;

curve 3 =  $10\text{ }\mu\text{F}$ , 16 V;  
 curve 4 =  $33\text{ }\mu\text{F}$ , 6,3 V.

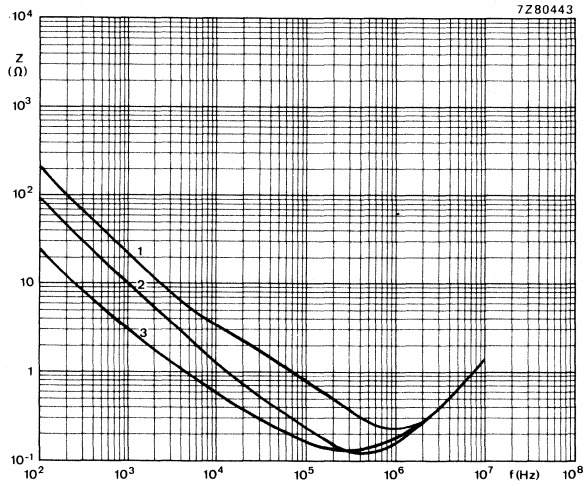


Fig. 16 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; **case size 4.**

Curve 1 =  $6,8\ \mu\text{F}$ ,  $25\ \text{V}$ ;  
 curve 2 =  $15\ \mu\text{F}$ ,  $16\ \text{V}$ ;

curve 3 =  $68\ \mu\text{F}$ ,  $6,3\ \text{V}$ .

**Equivalent series inductance (ESL)**

Equivalent series inductance, measured by means of a four-terminal circuit (Thomson circuit), at 10 MHz;

- capacitor leads bent to a pitch of 5,1 mm
- case sizes 1 and 2
- case sizes 3 and 4

max. 20 nH; typ. 9 to 14 nH  
 max. 20 nH; typ. 11 to 16 nH



**OPERATIONAL DATA**

**Category temperature range**

|  |                 |
|--|-----------------|
| for rated voltage, 6,3 V to 25 V range | -55 to + 125 °C |
| for rated voltage, 40 V range          | -55 to + 85 °C  |
| for derated voltage, 40 V range        | -55 to + 125 °C |

**Usable temperature range**

-55 to + 175 °C

**Typical life time**

|                              |            |
|------------------------------|------------|
| at $T_{amb} = 85\text{ °C}$  | > 20 000 h |
| at $T_{amb} = 125\text{ °C}$ | > 10 000 h |
| at $T_{amb} = 175\text{ °C}$ | > 2 000 h  |

**Field failure rate**

$< 1 \times 10^{-8}/h$

**Typical parameter change after endurance test at  $T_{amb} = 125\text{ °C}$**

see Figs. 17, 18 and 19

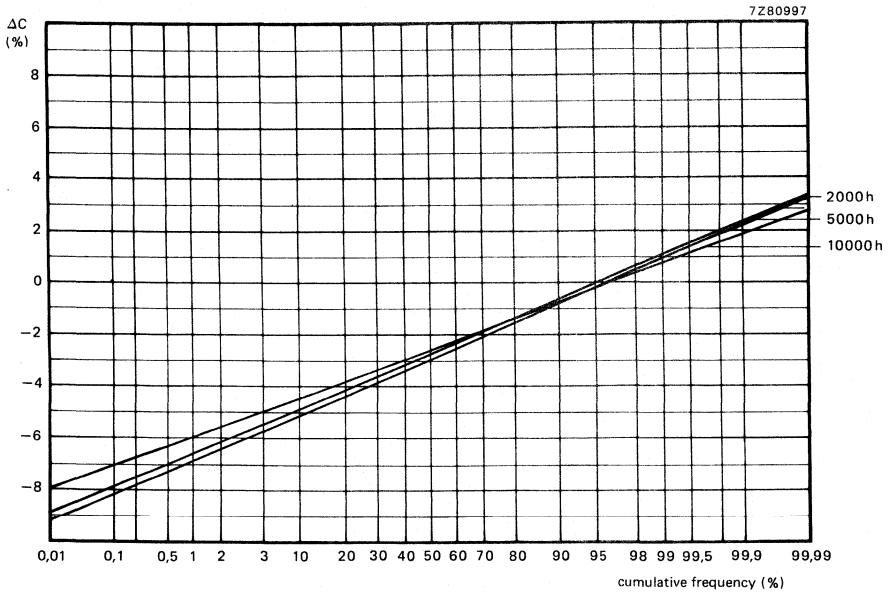


Fig. 17 Change of capacitance after endurance test.

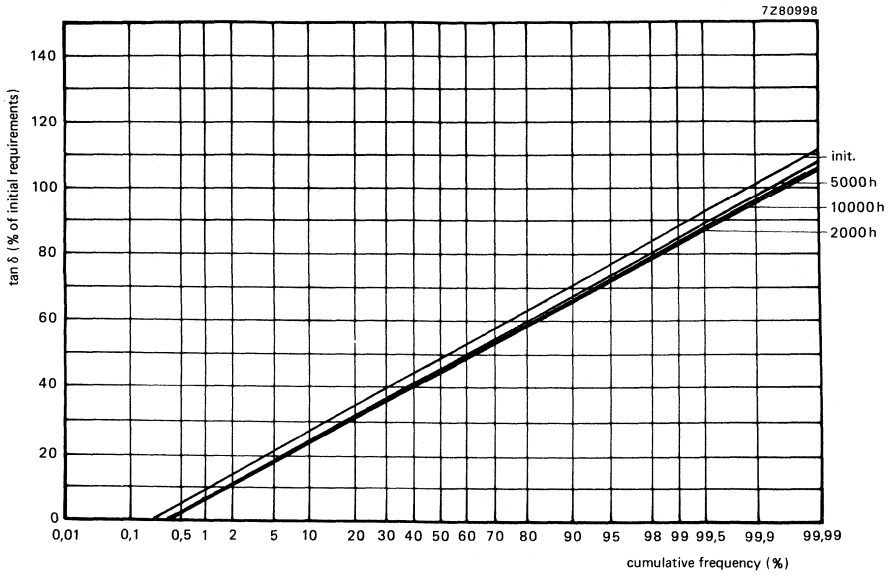


Fig. 18 Tan  $\delta$  after endurance test.

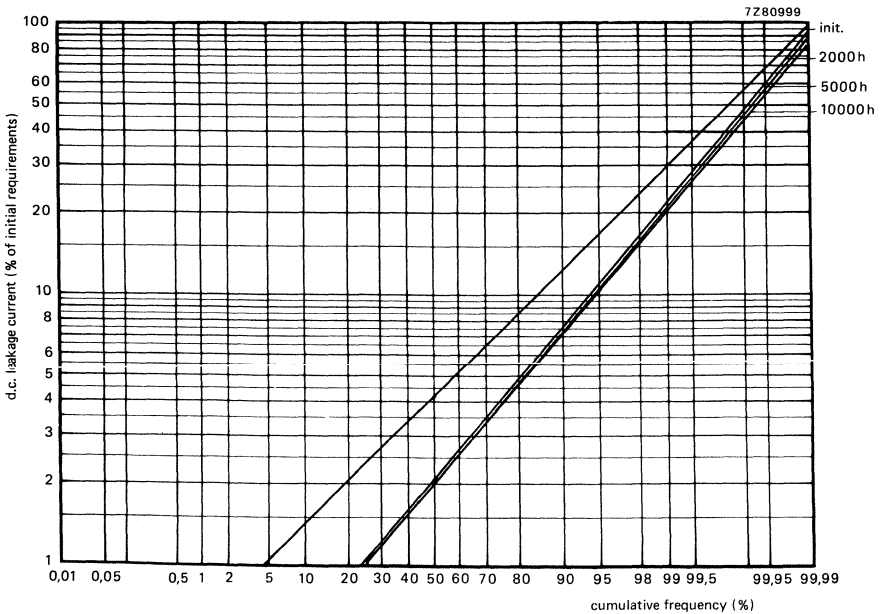


Fig. 19 D.C. leakage current after endurance test.

**PACKING**

Capacitors of styles 1 and 2 are supplied in boxes, those of styles 3 and 4 on tape on reel and in ammunition packing resp. The number of capacitors per box, per reel or per ammunition packing is:

- style 1, all case sizes : 1000 capacitors per box; 200 per plastic bag, 5 bags per box;
- style 2, case sizes 1, 2 and 3 : 1000 capacitors per box, 200 per plastic bag, 5 bags per box;
- style 2, case size 4 : 800 capacitors per box, 200 per plastic bag, 4 bags per box;
- style 3, case sizes 1 and 2 : 2000 capacitors per reel;
- style 3, case sizes 3 and 4 : 1000 capacitors per reel;
- style 4, case sizes 1 and 2 : 2000 capacitors per ammunition packing;
- style 4, case sizes 3 and 4 : 1000 capacitors per ammunition packing.

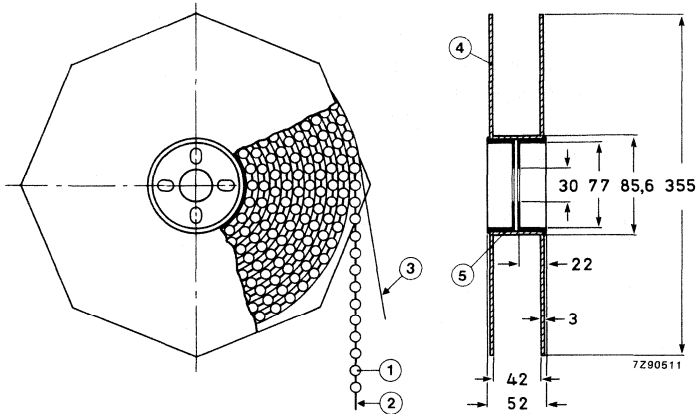


Fig. 20 Style 3 capacitors on tape on reel.  
 1 = capacitor                      4 = flange  
 2 = tape                              5 = cylinder  
 3 = paper

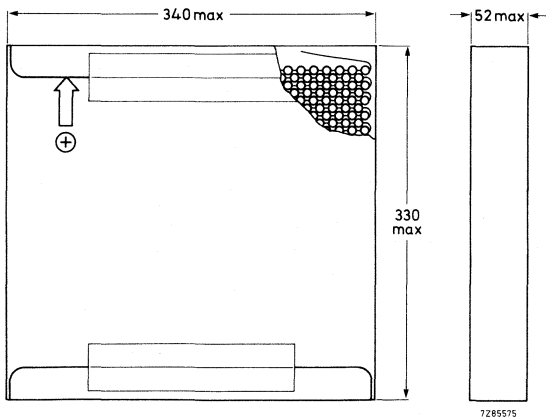


Fig. 21 Style 4 capacitors on tape in ammunition packing.

## → TESTS AND REQUIREMENTS

See Introduction, section 9, under solid aluminium capacitors, with the addition of the following tests.

### *Solvent resistance tests:*

Severity 1, according to MIL-STD-202, method 215, including brushing of all portions of the specimens.

- Solvents:
- deionized water ( $50 \pm 5$  °C);
  - 1.1.1. trichloro-ethane;
  - mixture of 25 vol. % 2-propanol (isopropanol) and 75 vol. % mineral spirits.
  - mixture of 50,5 mass % 1.1.2-trichloro-1.2.2-trifluoroethane (fluorocarbon 113) and 49,5 mass % dichloromethane (methylene chloride, Freon TMC\*\*).

Severity 2, according to IEC 68-2-45, and IEC 653, test XA with the following details and additions.

Conditions: immersion time of samples 5 min., at ambient temperature, at boiling temperature, in vapour of boiling solvent, and ultrasonic (40 kHz).

- Solvents:
- deionized water ( $50 \pm 5$  °C);
  - calgonite solution (20 g/l,  $70 \pm 5$  °C);
  - mixture of 4,5% 2-butoxyethanol, 4,5% 2-amino-ethanol, and 91% water ( $70 \pm 5$  °C);
  - 1.1.1. trichloro-ethane;
  - mixtures of 1.1.2-trichloro-1.2.2-trifluoro-ethane (fluorocarbon 113) and the following solvents in the respective mass percentage ratios of these solvents to fluorocarbon;
    - 2-propanol (isopropanol), 25%: 75% (Arklone K\*); up to the ratio 35%: 65%;
    - dichloromethane (methylene chloride), 49,5%: 50,5% (Freon TMC\*\*);
    - ethanol, 4,5%: 95,5% (e.g. Arklone A\*, Freon TE\*\*);
    - methanol and nitromethane, (5,7%: 0,3%: 94% (Freon TMS\*\*).

Requirement: visual appearance not affected.

Note: Tests are carried out using non-contaminated solvents.

*Extended vibration test*, according to IEC 68-2-6, test Fc: 10 to 2000 Hz, 1,5 mm or 20 g (whichever is less), 1 octave/min, 3 directions (mutually perpendicular), 1 sweep per direction, no voltage applied.

Requirements: no intermittent contacts; no breakdown; no open circuiting; no mechanical damage;  
 $\Delta C/C \leq 5\%$ ;  
 $\tan \delta$  and h.f. impedance  $\leq 1,2$  x stated limit;  
 d.c. leakage current  $\leq 1,5$  x stated limit;  
 typical capability: up to 50 g (clamping both the body and the leads).

*Shock test*, according to IEC 68-2-27, test Ea: half sine or sawtooth pulse shape, 50 g, 11 ms, 3 successive shocks in each direction of 3 mutually perpendicular axes, no voltage applied.

Requirements: no intermittent contacts; no breakdown; no open circuiting; no mechanical damage;  
 $\Delta C/C \leq 5\%$ ;  
 $\tan \delta$  and h.f. impedance  $\leq 1,2$  x stated limit;  
 d.c. leakage current  $< 1,5$  x stated limit;  
 typical capability: up to 100 g, also in combination with extended vibration test.

*Passive flammability test*, according to IEC 695-2-2, capacitor mounted to a vertical printed-wiring board, one flame on capacitor body,  $T_{amb} = 20$  to 25 °C, test duration = 20 s.

Requirements: after removing the test flame from the capacitor, the capacitor must not continue to burn for more than 15 s; no burning particles must drop from the sample.

\* Trade mark of I.C.I.

\*\* Trade mark of Dupont de Nemours.

### Survey of maximum permissible ripple voltage and ripple current values at various ambient temperatures and frequencies

#### Notes

- Zero d.c. voltage is assumed; at non-zero d.c. voltage the values in the tables can be adapted according to paragraphs "Ripple voltage" and "Ripple current".
- If the limiting current value given in the tables is applied, the voltage limit mentioned in "Ripple voltage, b", is not exceeded; if the limiting voltage value given in the tables is applied, the current limit calculated as in "Calculation of ripple currents" is not exceeded.

| C<br>μF                | T <sub>amb</sub><br>°C | frequency (Hz)        |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
|------------------------|------------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
|                        |                        | 1                     |                     | 50                    |                     | 100                   |                     | 300                   |                     | 600                   |                     | 1500                  |                     | 10 <sup>4</sup>       |                     | 10 <sup>5</sup>       |                     | 10 <sup>6</sup>       |                     |
|                        |                        | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V | I <sub>ac</sub><br>mA | V <sub>p</sub><br>V |
| U <sub>R</sub> = 6,3 V |                        |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
| 10                     | 25                     | 0,1                   | 3                   | 9                     | 5                   | 18                    | 5                   | 54                    | 5                   | 108                   | 5                   | 166                   | 3                   | 203                   | 0,6                 | 229                   | 0,1                 | 244                   | 0                   |
|                        | 45                     | 0,1                   | 3                   | 9                     | 5                   | 18                    | 5                   | 54                    | 5                   | 108                   | 5                   | 154                   | 3                   | 187                   | 0,5                 | 211                   | 0,1                 | 226                   | 0                   |
|                        | 65                     | 0,1                   | 3                   | 9                     | 5                   | 18                    | 5                   | 54                    | 5                   | 108                   | 5                   | 141                   | 2,5                 | 172                   | 0,5                 | 194                   | 0,1                 | 207                   | 0                   |
|                        | 85                     | 0,1                   | 3                   | 9                     | 5                   | 18                    | 5                   | 54                    | 5                   | 108                   | 5                   | 128                   | 2,5                 | 156                   | 0,4                 | 176                   | 0,1                 | 188                   | 0                   |
|                        | 125                    | 0                     | 1,5                 | 5                     | 2,5                 | 9                     | 2,5                 | 27                    | 2,5                 | 54                    | 2,5                 | 64                    | 1                   | 78                    | 0,2                 | 88                    | 0                   | 94                    | 0                   |
| 15                     | 25                     | 0,2                   | 3                   | 13                    | 5                   | 27                    | 5                   | 81                    | 5                   | 161                   | 5                   | 208                   | 2,5                 | 254                   | 0,5                 | 286                   | 0,1                 | 306                   | 0                   |
|                        | 45                     | 0,2                   | 3                   | 13                    | 5                   | 27                    | 5                   | 81                    | 5                   | 161                   | 5                   | 192                   | 2,5                 | 234                   | 0,4                 | 264                   | 0,1                 | 282                   | 0                   |
|                        | 65                     | 0,2                   | 3                   | 13                    | 5                   | 27                    | 5                   | 81                    | 5                   | 160                   | 5                   | 176                   | 2                   | 215                   | 0,4                 | 242                   | 0                   | 259                   | 0                   |
|                        | 85                     | 0,2                   | 3                   | 13                    | 5                   | 27                    | 5                   | 81                    | 5                   | 145                   | 4,5                 | 160                   | 2                   | 195                   | 0,4                 | 220                   | 0                   | 235                   | 0                   |
|                        | 125                    | 0,1                   | 1,5                 | 7                     | 2,5                 | 13                    | 2,5                 | 40                    | 2,5                 | 73                    | 2,5                 | 80                    | 1                   | 98                    | 0,2                 | 110                   | 0                   | 118                   | 0                   |
| 22                     | 25                     | 0,2                   | 3                   | 20                    | 5                   | 39                    | 5                   | 118                   | 5                   | 226                   | 5                   | 250                   | 2                   | 304                   | 0,4                 | 343                   | 0                   | 367                   | 0                   |
|                        | 45                     | 0,2                   | 3                   | 20                    | 5                   | 39                    | 5                   | 118                   | 5                   | 209                   | 4,5                 | 230                   | 2                   | 281                   | 0,4                 | 317                   | 0                   | 338                   | 0                   |
|                        | 65                     | 0,2                   | 3                   | 20                    | 5                   | 39                    | 5                   | 118                   | 5                   | 191                   | 4                   | 211                   | 2                   | 257                   | 0,3                 | 290                   | 0                   | 310                   | 0                   |
|                        | 85                     | 0,2                   | 3                   | 20                    | 5                   | 39                    | 5                   | 118                   | 5                   | 174                   | 3,5                 | 192                   | 1,5                 | 234                   | 0,3                 | 264                   | 0                   | 282                   | 0                   |
|                        | 125                    | 0,1                   | 1,5                 | 10                    | 2,5                 | 20                    | 2,5                 | 59                    | 2,5                 | 87                    | 2                   | 96                    | 0,8                 | 117                   | 0,2                 | 132                   | 0                   | 141                   | 0                   |
| 33                     | 25                     | 0,3                   | 3                   | 30                    | 5                   | 59                    | 5                   | 177                   | 5                   | 283                   | 4                   | 312                   | 2                   | 380                   | 0,3                 | 429                   | 0                   | 458                   | 0                   |
|                        | 45                     | 0,3                   | 3                   | 30                    | 5                   | 59                    | 5                   | 177                   | 5                   | 261                   | 3,5                 | 288                   | 1,5                 | 351                   | 0,3                 | 396                   | 0                   | 423                   | 0                   |
|                        | 65                     | 0,3                   | 3                   | 30                    | 5                   | 59                    | 5                   | 177                   | 5                   | 239                   | 3,5                 | 264                   | 1,5                 | 322                   | 0,3                 | 363                   | 0                   | 388                   | 0                   |
|                        | 85                     | 0,3                   | 3                   | 30                    | 5                   | 59                    | 5                   | 177                   | 5                   | 218                   | 3                   | 240                   | 1,5                 | 293                   | 0,2                 | 330                   | 0                   | 353                   | 0                   |
|                        | 125                    | 0,2                   | 1,5                 | 15                    | 2,5                 | 30                    | 2,5                 | 89                    | 2,5                 | 109                   | 1,5                 | 120                   | 0,7                 | 146                   | 0,1                 | 165                   | 0                   | 176                   | 0                   |
| 47                     | 25                     | 0,5                   | 3                   | 42                    | 5                   | 84                    | 5                   | 253                   | 5                   | 358                   | 3,5                 | 395                   | 1,5                 | 482                   | 0,3                 | 543                   | 0                   | 581                   | 0                   |
|                        | 45                     | 0,5                   | 3                   | 42                    | 5                   | 84                    | 5                   | 253                   | 5                   | 331                   | 3,5                 | 365                   | 1,5                 | 445                   | 0,3                 | 502                   | 0                   | 536                   | 0                   |
|                        | 65                     | 0,5                   | 3                   | 42                    | 5                   | 84                    | 5                   | 253                   | 5                   | 303                   | 3                   | 334                   | 1,5                 | 408                   | 0,2                 | 460                   | 0                   | 491                   | 0                   |
|                        | 85                     | 0,5                   | 3                   | 42                    | 5                   | 84                    | 5                   | 247                   | 5                   | 276                   | 2,5                 | 304                   | 1                   | 371                   | 0,2                 | 418                   | 0                   | 447                   | 0                   |
|                        | 125                    | 0,2                   | 1,5                 | 21                    | 2,5                 | 42                    | 2,5                 | 124                   | 2,5                 | 138                   | 1,5                 | 152                   | 0,6                 | 185                   | 0,1                 | 209                   | 0                   | 223                   | 0                   |
| 68                     | 25                     | 0,7                   | 3                   | 61                    | 5                   | 122                   | 5                   | 365                   | 5                   | 434                   | 3                   | 478                   | 1,5                 | 583                   | 0,2                 | 658                   | 0                   | 703                   | 0                   |
|                        | 45                     | 0,7                   | 3                   | 61                    | 5                   | 122                   | 5                   | 359                   | 5                   | 400                   | 3                   | 442                   | 1                   | 538                   | 0,2                 | 607                   | 0                   | 649                   | 0                   |
|                        | 65                     | 0,7                   | 3                   | 61                    | 5                   | 122                   | 5                   | 329                   | 4,5                 | 367                   | 2,5                 | 405                   | 1                   | 493                   | 0,2                 | 557                   | 0                   | 595                   | 0                   |
|                        | 85                     | 0,7                   | 3                   | 61                    | 5                   | 122                   | 5                   | 266                   | 4                   | 334                   | 2,5                 | 368                   | 1                   | 449                   | 0,2                 | 506                   | 0                   | 541                   | 0                   |
|                        | 125                    | 0,3                   | 1,5                 | 31                    | 2,5                 | 61                    | 2,5                 | 150                   | 2                   | 167                   | 1                   | 184                   | 0,5                 | 224                   | 0,1                 | 253                   | 0                   | 270                   | 0                   |

| C<br>$\mu\text{F}$            | $T_{\text{amb}}$<br>$^{\circ}\text{C}$ | frequency (Hz)        |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
|-------------------------------|--|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
|                               |  | 1                     |                     | 50                    |                     | 100                   |                     | 300                   |                     | 600                   |                     | 1500                  |                     | $10^4$                |                     | $10^5$                |                     | $10^6$                |                     |
|                               |  | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V |
| $U_{\text{R}} = 10 \text{ V}$ |  |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
| 4,7                           | 25                                     | 0,1                   | 4,5                 | 7                     | 8                   | 13                    | 8                   | 40                    | 8                   | 80                    | 8                   | 125                   | 5                   | 152                   | 0,9                 | 172                   | 0,1                 | 183                   | 0                   |
|                               | 45                                     | 0,1                   | 4,5                 | 7                     | 8                   | 13                    | 8                   | 40                    | 8                   | 80                    | 8                   | 115                   | 4,5                 | 140                   | 0,8                 | 158                   | 0,1                 | 169                   | 0                   |
|                               | 65                                     | 0,1                   | 4,5                 | 7                     | 8                   | 13                    | 8                   | 40                    | 8                   | 80                    | 8                   | 106                   | 4                   | 129                   | 0,8                 | 145                   | 0,1                 | 155                   | 0                   |
|                               | 85                                     | 0,1                   | 4,5                 | 7                     | 8                   | 13                    | 8                   | 40                    | 8                   | 80                    | 8                   | 96                    | 4                   | 117                   | 0,7                 | 132                   | 0,1                 | 141                   | 0                   |
|                               | 125                                    | 0                     | 2                   | 3                     | 4                   | 7                     | 4                   | 20                    | 4                   | 40                    | 4                   | 48                    | 2                   | 59                    | 0,4                 | 66                    | 0                   | 71                    | 0                   |
| 6,8                           | 25                                     | 0,1                   | 4,5                 | 10                    | 8                   | 19                    | 8                   | 58                    | 8                   | 116                   | 8                   | 146                   | 4                   | 178                   | 0,7                 | 200                   | 0,1                 | 214                   | 0                   |
|                               | 45                                     | 0,1                   | 4,5                 | 10                    | 8                   | 19                    | 8                   | 58                    | 8                   | 116                   | 8                   | 134                   | 3,5                 | 164                   | 0,7                 | 185                   | 0,1                 | 197                   | 0                   |
|                               | 65                                     | 0,1                   | 4,5                 | 10                    | 8                   | 19                    | 8                   | 58                    | 8                   | 112                   | 7,5                 | 123                   | 3,5                 | 150                   | 0,6                 | 169                   | 0,1                 | 181                   | 0                   |
|                               | 85                                     | 0,1                   | 4,5                 | 10                    | 8                   | 19                    | 8                   | 58                    | 8                   | 102                   | 7                   | 112                   | 3                   | 137                   | 0,6                 | 154                   | 0,1                 | 165                   | 0                   |
|                               | 125                                    | 0,1                   | 2                   | 5                     | 4                   | 10                    | 4                   | 29                    | 4                   | 51                    | 3,5                 | 56                    | 1,5                 | 68                    | 0,3                 | 77                    | 0                   | 82                    | 0                   |
| 10                            | 25                                     | 0,2                   | 4,5                 | 14                    | 8                   | 28                    | 8                   | 85                    | 8                   | 151                   | 7                   | 166                   | 3                   | 203                   | 0,6                 | 229                   | 0,1                 | 244                   | 0                   |
|                               | 45                                     | 0,2                   | 4,5                 | 14                    | 8                   | 28                    | 8                   | 85                    | 8                   | 139                   | 6,5                 | 154                   | 3                   | 187                   | 0,5                 | 211                   | 0,1                 | 226                   | 0                   |
|                               | 65                                     | 0,2                   | 4,5                 | 14                    | 8                   | 28                    | 8                   | 85                    | 8                   | 128                   | 6                   | 141                   | 2,5                 | 172                   | 0,5                 | 194                   | 0,1                 | 207                   | 0                   |
|                               | 85                                     | 0,2                   | 4,5                 | 14                    | 8                   | 28                    | 8                   | 85                    | 8                   | 116                   | 5,5                 | 128                   | 2,5                 | 156                   | 0,4                 | 176                   | 0,1                 | 188                   | 0                   |
|                               | 125                                    | 0,1                   | 2                   | 7                     | 4                   | 14                    | 4                   | 43                    | 4                   | 58                    | 2,5                 | 64                    | 1                   | 78                    | 0,2                 | 88                    | 0                   | 94                    | 0                   |
| 15                            | 25                                     | 0,2                   | 4,5                 | 21                    | 8                   | 43                    | 8                   | 128                   | 8                   | 189                   | 6                   | 208                   | 2,5                 | 254                   | 0,5                 | 286                   | 0,1                 | 306                   | 0                   |
|                               | 45                                     | 0,2                   | 4,5                 | 21                    | 8                   | 43                    | 8                   | 128                   | 8                   | 174                   | 5,5                 | 192                   | 2,5                 | 234                   | 0,4                 | 264                   | 0,1                 | 282                   | 0                   |
|                               | 65                                     | 0,2                   | 4,5                 | 21                    | 8                   | 43                    | 8                   | 128                   | 8                   | 160                   | 5                   | 176                   | 2                   | 215                   | 0,4                 | 242                   | 0                   | 259                   | 0                   |
|                               | 85                                     | 0,2                   | 4,5                 | 21                    | 8                   | 43                    | 8                   | 128                   | 8                   | 145                   | 4,5                 | 160                   | 2                   | 195                   | 0,4                 | 220                   | 0                   | 235                   | 0                   |
|                               | 125                                    | 0,1                   | 2                   | 11                    | 4                   | 21                    | 4                   | 64                    | 4                   | 73                    | 2,5                 | 80                    | 1                   | 98                    | 0,2                 | 110                   | 0                   | 118                   | 0                   |
| 22                            | 25                                     | 0,4                   | 4,5                 | 31                    | 8                   | 63                    | 8                   | 188                   | 8                   | 116                   | 5                   | 250                   | 2                   | 304                   | 0,4                 | 343                   | 0                   | 367                   | 0                   |
|                               | 45                                     | 0,4                   | 4,5                 | 31                    | 8                   | 63                    | 8                   | 187                   | 8                   | 209                   | 4,5                 | 230                   | 2                   | 281                   | 0,4                 | 317                   | 0                   | 338                   | 0                   |
|                               | 65                                     | 0,4                   | 4,5                 | 31                    | 8                   | 63                    | 8                   | 172                   | 7,5                 | 191                   | 4                   | 211                   | 2                   | 257                   | 0,3                 | 290                   | 0                   | 310                   | 0                   |
|                               | 85                                     | 0,4                   | 4,5                 | 31                    | 8                   | 63                    | 8                   | 156                   | 6,5                 | 174                   | 3,5                 | 192                   | 1,5                 | 234                   | 0,3                 | 264                   | 0                   | 282                   | 0                   |
|                               | 125                                    | 0,2                   | 2                   | 16                    | 4                   | 31                    | 4                   | 78                    | 3,5                 | 87                    | 2                   | 96                    | 0,8                 | 117                   | 0,2                 | 132                   | 0                   | 141                   | 0                   |
| 33                            | 25                                     | 0,5                   | 4,5                 | 47                    | 8                   | 94                    | 8                   | 270                   | 7,5                 | 302                   | 4,5                 | 333                   | 2                   | 406                   | 0,3                 | 458                   | 0                   | 489                   | 0                   |
|                               | 45                                     | 0,5                   | 4,5                 | 47                    | 8                   | 94                    | 8                   | 250                   | 7                   | 278                   | 4                   | 307                   | 1,5                 | 374                   | 0,3                 | 422                   | 0                   | 451                   | 0                   |
|                               | 65                                     | 0,5                   | 4,5                 | 47                    | 8                   | 94                    | 8                   | 229                   | 6,5                 | 255                   | 3,5                 | 282                   | 1,5                 | 343                   | 0,3                 | 387                   | 0                   | 414                   | 0                   |
|                               | 85                                     | 0,5                   | 4,5                 | 47                    | 8                   | 94                    | 8                   | 208                   | 6                   | 232                   | 3,5                 | 256                   | 1,5                 | 312                   | 0,3                 | 352                   | 0                   | 376                   | 0                   |
|                               | 125                                    | 0,3                   | 2                   | 24                    | 4                   | 47                    | 4                   | 104                   | 3                   | 116                   | 1,5                 | 128                   | 0,7                 | 156                   | 0,1                 | 176                   | 0                   | 188                   | 0                   |

| C<br>$\mu\text{F}$            | $T_{\text{amb}}$<br>$^{\circ}\text{C}$ | frequency (Hz)        |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
|-------------------------------|--|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
|                               |  | 1                     |                     | 50                    |                     | 100                   |                     | 300                   |                     | 600                   |                     | 1500                  |                     | $10^4$                |                     | $10^5$                |                     | $10^6$                |                     |
|                               |  | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V | $I_{\text{ac}}$<br>mA | $V_{\text{P}}$<br>V |
| $U_{\text{R}} = 16 \text{ V}$ |  |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
| 2,2                           | 25                                     | 0,1                   | 7                   | 5                     | 13                  | 10                    | 13                  | 30                    | 13                  | 60                    | 13                  | 104                   | 9                   | 127                   | 1,5                 | 143                   | 0,2                 | 153                   | 0                   |
|                               | 45                                     | 0,1                   | 7                   | 5                     | 13                  | 10                    | 13                  | 30                    | 13                  | 60                    | 13                  | 96                    | 8                   | 117                   | 1,5                 | 132                   | 0,2                 | 141                   | 0                   |
|                               | 65                                     | 0,1                   | 7                   | 5                     | 13                  | 10                    | 13                  | 30                    | 13                  | 60                    | 13                  | 88                    | 7,5                 | 107                   | 1,5                 | 121                   | 0,2                 | 129                   | 0                   |
|                               | 85                                     | 0,1                   | 7                   | 5                     | 13                  | 10                    | 13                  | 30                    | 13                  | 60                    | 13                  | 80                    | 7                   | 98                    | 1                   | 110                   | 0,1                 | 118                   | 0                   |
|                               | 125                                    | 0                     | 3,5                 | 3                     | 6,5                 | 5                     | 6,5                 | 15                    | 6,5                 | 30                    | 6,5                 | 40                    | 3,5                 | 49                    | 0,6                 | 55                    | 0,1                 | 59                    | 0                   |
| 3,3                           | 25                                     | 0,1                   | 7                   | 8                     | 13                  | 15                    | 13                  | 45                    | 13                  | 90                    | 13                  | 125                   | 7                   | 152                   | 1,5                 | 172                   | 0,1                 | 183                   | 0                   |
|                               | 45                                     | 0,1                   | 7                   | 8                     | 13                  | 15                    | 13                  | 45                    | 13                  | 90                    | 13                  | 115                   | 6,5                 | 140                   | 1                   | 158                   | 0,1                 | 169                   | 0                   |
|                               | 65                                     | 0,1                   | 7                   | 8                     | 13                  | 15                    | 13                  | 45                    | 13                  | 90                    | 13                  | 106                   | 6                   | 129                   | 1                   | 145                   | 0,1                 | 155                   | 0                   |
|                               | 85                                     | 0,1                   | 7                   | 8                     | 13                  | 15                    | 13                  | 45                    | 13                  | 87                    | 12,5                | 96                    | 5,5                 | 117                   | 1                   | 132                   | 0,1                 | 141                   | 0                   |
|                               | 125                                    | 0                     | 3,5                 | 4                     | 6,5                 | 8                     | 6,5                 | 23                    | 6,5                 | 44                    | 6                   | 48                    | 2,5                 | 59                    | 0,5                 | 66                    | 0,1                 | 71                    | 0                   |
| 4,7                           | 25                                     | 0,1                   | 7                   | 11                    | 13                  | 21                    | 13                  | 64                    | 13                  | 128                   | 13                  | 146                   | 6                   | 178                   | 1                   | 200                   | 0,1                 | 214                   | 0                   |
|                               | 45                                     | 0,1                   | 7                   | 11                    | 13                  | 21                    | 13                  | 64                    | 13                  | 122                   | 12                  | 134                   | 5,5                 | 164                   | 1                   | 185                   | 0,1                 | 197                   | 0                   |
|                               | 65                                     | 0,1                   | 7                   | 11                    | 13                  | 21                    | 13                  | 64                    | 13                  | 112                   | 11                  | 123                   | 5                   | 150                   | 0,9                 | 169                   | 0,1                 | 181                   | 0                   |
|                               | 85                                     | 0,1                   | 7                   | 11                    | 13                  | 21                    | 13                  | 64                    | 13                  | 102                   | 10                  | 112                   | 4,5                 | 137                   | 0,8                 | 154                   | 0,1                 | 165                   | 0                   |
|                               | 125                                    | 0,1                   | 3,5                 | 5                     | 6,5                 | 11                    | 6,5                 | 32                    | 6,5                 | 51                    | 5                   | 56                    | 2                   | 68                    | 0,4                 | 77                    | 0                   | 82                    | 0                   |
| 6,8                           | 25                                     | 0,2                   | 7                   | 16                    | 13                  | 31                    | 13                  | 93                    | 13                  | 151                   | 10,5                | 166                   | 4,5                 | 203                   | 0,8                 | 229                   | 0,1                 | 244                   | 0                   |
|                               | 45                                     | 0,2                   | 7                   | 16                    | 13                  | 31                    | 13                  | 93                    | 13                  | 139                   | 9,5                 | 154                   | 4                   | 187                   | 0,8                 | 211                   | 0,1                 | 226                   | 0                   |
|                               | 65                                     | 0,2                   | 7                   | 16                    | 13                  | 31                    | 13                  | 93                    | 13                  | 128                   | 9                   | 141                   | 4                   | 172                   | 0,7                 | 194                   | 0,1                 | 207                   | 0                   |
|                               | 85                                     | 0,2                   | 7                   | 16                    | 13                  | 31                    | 13                  | 93                    | 13                  | 116                   | 8                   | 128                   | 3,5                 | 156                   | 0,6                 | 176                   | 0,1                 | 188                   | 0                   |
|                               | 125                                    | 0,1                   | 3,5                 | 8                     | 6,5                 | 16                    | 6,5                 | 46                    | 6,5                 | 58                    | 4                   | 64                    | 2                   | 78                    | 0,3                 | 88                    | 0                   | 94                    | 0                   |
| 10                            | 25                                     | 0,3                   | 7                   | 23                    | 13                  | 46                    | 13                  | 137                   | 13                  | 189                   | 9                   | 208                   | 4                   | 254                   | 0,7                 | 286                   | 0,1                 | 306                   | 0                   |
|                               | 45                                     | 0,3                   | 7                   | 23                    | 13                  | 46                    | 13                  | 137                   | 13                  | 174                   | 8                   | 192                   | 3,5                 | 234                   | 0,7                 | 264                   | 0,1                 | 282                   | 0                   |
|                               | 65                                     | 0,3                   | 7                   | 23                    | 13                  | 46                    | 13                  | 137                   | 13                  | 160                   | 7,5                 | 176                   | 3,5                 | 215                   | 0,6                 | 242                   | 0,1                 | 259                   | 0                   |
|                               | 85                                     | 0,3                   | 7                   | 23                    | 13                  | 46                    | 13                  | 130                   | 12                  | 145                   | 7                   | 160                   | 3                   | 195                   | 0,5                 | 220                   | 0,1                 | 235                   | 0                   |
|                               | 125                                    | 0,1                   | 3,5                 | 11                    | 6,5                 | 23                    | 6,5                 | 65                    | 6                   | 73                    | 3,5                 | 80                    | 1,5                 | 98                    | 0,3                 | 110                   | 0                   | 118                   | 0                   |
| 15                            | 25                                     | 0,4                   | 7                   | 34                    | 13                  | 68                    | 13                  | 205                   | 13                  | 245                   | 7,5                 | 270                   | 3,5                 | 330                   | 0,6                 | 372                   | 0,1                 | 397                   | 0                   |
|                               | 45                                     | 0,4                   | 7                   | 34                    | 13                  | 68                    | 13                  | 203                   | 12,5                | 226                   | 7                   | 250                   | 3                   | 304                   | 0,6                 | 343                   | 0,1                 | 367                   | 0                   |
|                               | 65                                     | 0,4                   | 7                   | 34                    | 13                  | 68                    | 13                  | 186                   | 11,5                | 207                   | 6,5                 | 229                   | 3                   | 279                   | 0,5                 | 315                   | 0,1                 | 336                   | 0                   |
|                               | 85                                     | 0,4                   | 7                   | 34                    | 13                  | 68                    | 13                  | 169                   | 10,5                | 189                   | 6                   | 208                   | 2,5                 | 254                   | 0,5                 | 286                   | 0,1                 | 306                   | 0                   |
|                               | 125                                    | 0,2                   | 3,5                 | 17                    | 6,5                 | 34                    | 6,5                 | 85                    | 5,5                 | 94                    | 3                   | 104                   | 1,5                 | 127                   | 0,2                 | 143                   | 0                   | 153                   | 0                   |

| C<br>μF               | T <sub>amb</sub><br>°C | frequency (Hz)        |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
|-----------------------|------------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
|                       |                        | 1                     |                     | 50                    |                     | 100                   |                     | 300                   |                     | 600                   |                     | 1500                  |                     | 10 <sup>4</sup>       |                     | 10 <sup>5</sup>       |                     | 10 <sup>6</sup>       |                     |
|                       |                        | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V |
| U <sub>R</sub> = 25 V |                        |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
| 0,68                  | 25                     | 0                     | 11                  | 2                     | 20                  | 5                     | 20                  | 15                    | 20                  | 29                    | 20                  | 58                    | 16                  | 71                    | 3                   | 80                    | 0,3                 | 86                    | 0                   |
|                       | 45                     | 0                     | 11                  | 2                     | 20                  | 5                     | 20                  | 15                    | 20                  | 29                    | 20                  | 54                    | 15                  | 66                    | 2,5                 | 74                    | 0,3                 | 79                    | 0                   |
|                       | 65                     | 0                     | 11                  | 2                     | 20                  | 5                     | 20                  | 15                    | 20                  | 29                    | 20                  | 49                    | 13,5                | 60                    | 2,5                 | 68                    | 0,3                 | 72                    | 0                   |
|                       | 85                     | 0                     | 11                  | 2                     | 20                  | 5                     | 20                  | 15                    | 20                  | 29                    | 20                  | 45                    | 12,5                | 55                    | 2,5                 | 62                    | 0,3                 | 66                    | 0                   |
|                       | 125                    | 0                     | 5,5                 | 1                     | 10                  | 2                     | 10                  | 7                     | 10                  | 15                    | 10                  | 22                    | 6                   | 27                    | 1                   | 31                    | 0,1                 | 33                    | 0                   |
| 1                     | 25                     | 0                     | 11                  | 4                     | 20                  | 7                     | 20                  | 21                    | 20                  | 43                    | 20                  | 67                    | 12,5                | 81                    | 2,5                 | 92                    | 0,3                 | 98                    | 0                   |
|                       | 45                     | 0                     | 11                  | 4                     | 20                  | 7                     | 20                  | 21                    | 20                  | 43                    | 20                  | 61                    | 11,5                | 75                    | 2                   | 85                    | 0,2                 | 90                    | 0                   |
|                       | 65                     | 0                     | 11                  | 4                     | 20                  | 7                     | 20                  | 21                    | 20                  | 43                    | 20                  | 56                    | 10,5                | 69                    | 2                   | 77                    | 0,2                 | 83                    | 0                   |
|                       | 85                     | 0                     | 11                  | 4                     | 20                  | 7                     | 20                  | 21                    | 20                  | 43                    | 20                  | 51                    | 9,5                 | 62                    | 2                   | 70                    | 0,2                 | 75                    | 0                   |
|                       | 125                    | 0                     | 5,5                 | 2                     | 10                  | 4                     | 10                  | 11                    | 10                  | 21                    | 10                  | 26                    | 5                   | 31                    | 0,9                 | 35                    | 0,1                 | 38                    | 0                   |
| 1,5                   | 25                     | 0,1                   | 11                  | 5                     | 20                  | 11                    | 20                  | 32                    | 20                  | 64                    | 20                  | 83                    | 10,5                | 101                   | 2                   | 114                   | 0,2                 | 122                   | 0                   |
|                       | 45                     | 0,1                   | 11                  | 5                     | 20                  | 11                    | 20                  | 32                    | 20                  | 64                    | 20                  | 77                    | 9,5                 | 94                    | 2                   | 106                   | 0,2                 | 113                   | 0                   |
|                       | 65                     | 0,1                   | 11                  | 5                     | 20                  | 11                    | 20                  | 32                    | 20                  | 64                    | 20                  | 70                    | 9                   | 86                    | 1,5                 | 97                    | 0,2                 | 103                   | 0                   |
|                       | 85                     | 0,1                   | 11                  | 5                     | 20                  | 11                    | 20                  | 32                    | 20                  | 58                    | 18                  | 64                    | 8                   | 78                    | 1,5                 | 88                    | 0,2                 | 94                    | 0                   |
|                       | 125                    | 0                     | 5,5                 | 3                     | 10                  | 5                     | 10                  | 16                    | 10                  | 29                    | 9                   | 32                    | 4                   | 39                    | 0,7                 | 44                    | 0,1                 | 47                    | 0                   |
| 2,2                   | 25                     | 0,1                   | 11                  | 8                     | 20                  | 16                    | 20                  | 47                    | 20                  | 94                    | 20                  | 104                   | 9                   | 127                   | 1,5                 | 143                   | 0,2                 | 153                   | 0                   |
|                       | 45                     | 0,1                   | 11                  | 8                     | 20                  | 16                    | 20                  | 47                    | 20                  | 87                    | 18,5                | 96                    | 8                   | 117                   | 1,5                 | 132                   | 0,2                 | 141                   | 0                   |
|                       | 65                     | 0,1                   | 11                  | 8                     | 20                  | 16                    | 20                  | 47                    | 20                  | 80                    | 17                  | 88                    | 7,5                 | 107                   | 1,5                 | 121                   | 0,2                 | 129                   | 0                   |
|                       | 85                     | 0,1                   | 11                  | 8                     | 20                  | 16                    | 20                  | 47                    | 20                  | 73                    | 15,5                | 80                    | 7                   | 98                    | 1                   | 110                   | 0,1                 | 118                   | 0                   |
|                       | 125                    | 0                     | 5,5                 | 4                     | 10                  | 8                     | 10                  | 24                    | 10                  | 36                    | 7,5                 | 40                    | 3,5                 | 49                    | 0,6                 | 55                    | 0,1                 | 59                    | 0                   |
| 3,3                   | 25                     | 0,1                   | 11                  | 12                    | 20                  | 24                    | 20                  | 70                    | 20                  | 113                   | 16                  | 125                   | 7                   | 152                   | 1,5                 | 172                   | 0,1                 | 183                   | 0                   |
|                       | 45                     | 0,1                   | 11                  | 12                    | 20                  | 24                    | 20                  | 70                    | 20                  | 104                   | 15                  | 115                   | 6,5                 | 140                   | 1                   | 158                   | 0,1                 | 169                   | 0                   |
|                       | 65                     | 0,1                   | 11                  | 12                    | 20                  | 24                    | 20                  | 70                    | 20                  | 96                    | 13,5                | 106                   | 6                   | 129                   | 1                   | 145                   | 0,1                 | 155                   | 0                   |
|                       | 85                     | 0,1                   | 11                  | 12                    | 20                  | 24                    | 20                  | 70                    | 20                  | 87                    | 12,5                | 96                    | 5,5                 | 117                   | 1                   | 132                   | 0,1                 | 141                   | 0                   |
|                       | 125                    | 0,1                   | 5,5                 | 6                     | 10                  | 12                    | 10                  | 35                    | 10                  | 44                    | 6                   | 48                    | 2,5                 | 59                    | 0,5                 | 66                    | 0,1                 | 71                    | 0                   |
| 4,7                   | 25                     | 0,2                   | 11                  | 17                    | 20                  | 33                    | 20                  | 100                   | 20                  | 132                   | 13                  | 146                   | 6                   | 178                   | 1                   | 200                   | 0,1                 | 214                   | 0                   |
|                       | 45                     | 0,2                   | 11                  | 17                    | 20                  | 33                    | 20                  | 100                   | 20                  | 122                   | 12                  | 134                   | 5,5                 | 164                   | 1                   | 185                   | 0,1                 | 197                   | 0                   |
|                       | 65                     | 0,2                   | 11                  | 17                    | 20                  | 33                    | 20                  | 100                   | 20                  | 112                   | 11                  | 123                   | 5                   | 150                   | 0,9                 | 169                   | 0,1                 | 181                   | 0                   |
|                       | 85                     | 0,2                   | 11                  | 17                    | 20                  | 33                    | 20                  | 91                    | 18                  | 102                   | 10                  | 112                   | 4,5                 | 137                   | 0,8                 | 154                   | 0,1                 | 165                   | 0                   |
|                       | 125                    | 0,1                   | 5,5                 | 8                     | 10                  | 17                    | 10                  | 46                    | 9                   | 51                    | 5                   | 56                    | 2                   | 68                    | 0,4                 | 77                    | 0                   | 82                    | 0                   |
| 6,8                   | 25                     | 0,3                   | 11                  | 24                    | 20                  | 48                    | 20                  | 145                   | 20                  | 170                   | 11,5                | 187                   | 5                   | 228                   | 0,9                 | 257                   | 0,1                 | 275                   | 0                   |
|                       | 45                     | 0,3                   | 11                  | 24                    | 20                  | 48                    | 20                  | 140                   | 19,5                | 157                   | 11                  | 173                   | 5                   | 211                   | 0,9                 | 238                   | 0,1                 | 254                   | 0                   |
|                       | 65                     | 0,3                   | 11                  | 24                    | 20                  | 48                    | 20                  | 129                   | 17,5                | 144                   | 10                  | 158                   | 4,5                 | 193                   | 0,8                 | 218                   | 0,1                 | 233                   | 0                   |
|                       | 85                     | 0,3                   | 11                  | 24                    | 20                  | 48                    | 20                  | 117                   | 16                  | 131                   | 9                   | 144                   | 4                   | 176                   | 0,7                 | 198                   | 0,1                 | 212                   | 0                   |
|                       | 125                    | 0,1                   | 5,5                 | 12                    | 10                  | 24                    | 10                  | 59                    | 8                   | 65                    | 4,5                 | 72                    | 2                   | 88                    | 0,4                 | 99                    | 0                   | 106                   | 0                   |




| C<br>μF               | T <sub>amb</sub><br>°C | frequency (Hz)        |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
|-----------------------|------------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|-----------------------|---------------------|
|                       |                        | 1                     |                     | 10                    |                     | 100                   |                     | 300                   |                     | 600                   |                     | 1500                  |                     | 10 <sup>4</sup>       |                     | 10 <sup>5</sup>       |                     | 10 <sup>6</sup>       |                     |
|                       |                        | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V | I <sub>ac</sub><br>mA | V <sub>P</sub><br>V |
| U <sub>R</sub> = 40 V |                        |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |                       |                     |
| 0,1                   | 25                     | 0                     | 18                  | 0,6                   | 32                  | 1                     | 32                  | 3                     | 32                  | 7                     | 32                  | 17                    | 32                  | 25                    | 7                   | 29                    | 0,8                 | 31                    | 0,1                 |
|                       | 45                     | 0                     | 18                  | 0,6                   | 32                  | 1                     | 32                  | 3                     | 32                  | 7                     | 32                  | 17                    | 32                  | 23                    | 6,5                 | 26                    | 0,7                 | 28                    | 0,1                 |
|                       | 65                     | 0                     | 18                  | 0,6                   | 32                  | 1                     | 32                  | 3                     | 32                  | 7                     | 32                  | 17                    | 32                  | 22                    | 6                   | 24                    | 0,7                 | 26                    | 0,1                 |
|                       | 85                     | 0                     | 18                  | 0,6                   | 32                  | 1                     | 32                  | 3                     | 32                  | 7                     | 32                  | 16                    | 30                  | 20                    | 5,5                 | 22                    | 0,6                 | 24                    | 0,1                 |
|                       | 125                    | 0                     | 9                   | 0,2                   | 10                  | 0,4                   | 10                  | 1                     | 10                  | 2                     | 10                  | 5                     | 10                  | 10                    | 3                   | 11                    | 0,3                 | 12                    | 0                   |
| 0,15                  | 25                     | 0                     | 18                  | 0,9                   | 32                  | 2                     | 32                  | 5                     | 32                  | 10                    | 32                  | 25                    | 31,5                | 30                    | 5,5                 | 34                    | 0,6                 | 37                    | 0,1                 |
|                       | 45                     | 0                     | 18                  | 0,9                   | 32                  | 2                     | 32                  | 5                     | 32                  | 10                    | 32                  | 23                    | 29                  | 28                    | 5,5                 | 32                    | 0,6                 | 34                    | 0,1                 |
|                       | 65                     | 0                     | 18                  | 0,9                   | 32                  | 2                     | 32                  | 5                     | 32                  | 10                    | 32                  | 21                    | 26,5                | 26                    | 5                   | 29                    | 0,5                 | 31                    | 0,1                 |
|                       | 85                     | 0                     | 18                  | 0,9                   | 32                  | 2                     | 32                  | 5                     | 32                  | 10                    | 32                  | 19                    | 24                  | 23                    | 4,5                 | 26                    | 0,5                 | 28                    | 0,1                 |
|                       | 125                    | 0                     | 9                   | 0,3                   | 10                  | 0,5                   | 10                  | 2                     | 10                  | 3                     | 10                  | 8                     | 10                  | 12                    | 2                   | 13                    | 0,2                 | 14                    | 0                   |
| 0,22                  | 25                     | 0                     | 18                  | 1                     | 32                  | 3                     | 32                  | 8                     | 32                  | 15                    | 32                  | 33                    | 28,5                | 41                    | 5                   | 46                    | 0,6                 | 49                    | 0,1                 |
|                       | 45                     | 0                     | 18                  | 1                     | 32                  | 3                     | 32                  | 8                     | 32                  | 15                    | 32                  | 31                    | 26                  | 37                    | 5                   | 42                    | 0,5                 | 45                    | 0,1                 |
|                       | 65                     | 0                     | 18                  | 1                     | 32                  | 3                     | 32                  | 8                     | 32                  | 15                    | 32                  | 28                    | 24                  | 34                    | 4,5                 | 39                    | 0,5                 | 41                    | 0,1                 |
|                       | 85                     | 0                     | 18                  | 1                     | 32                  | 3,3                   | 32                  | 8                     | 32                  | 15                    | 32                  | 26                    | 22                  | 31                    | 4                   | 35                    | 0,5                 | 38                    | 0                   |
|                       | 125                    | 0                     | 9                   | 0,4                   | 10                  | 0,8                   | 10                  | 2                     | 10                  | 5                     | 10                  | 12                    | 10                  | 16                    | 2                   | 18                    | 0,2                 | 19                    | 0                   |
| 0,33                  | 25                     | 0                     | 18                  | 2                     | 32                  | 4                     | 32                  | 11                    | 32                  | 23                    | 32                  | 42                    | 23,5                | 51                    | 4,5                 | 57                    | 0,5                 | 61                    | 0,1                 |
|                       | 45                     | 0                     | 18                  | 2                     | 32                  | 4                     | 32                  | 11                    | 32                  | 23                    | 32                  | 38                    | 22                  | 47                    | 4                   | 53                    | 0,5                 | 56                    | 0                   |
|                       | 65                     | 0                     | 18                  | 2                     | 32                  | 4                     | 32                  | 11                    | 32                  | 23                    | 32                  | 35                    | 20                  | 43                    | 3,5                 | 48                    | 0,4                 | 52                    | 0                   |
|                       | 85                     | 0                     | 18                  | 2                     | 32                  | 4                     | 32                  | 11                    | 32                  | 23                    | 32                  | 32                    | 18                  | 39                    | 3,5                 | 44                    | 0,4                 | 47                    | 0                   |
|                       | 125                    | 0                     | 9                   | 0,6                   | 10                  | 1                     | 10                  | 4                     | 10                  | 7                     | 10                  | 16                    | 9                   | 20                    | 1,5                 | 22                    | 0,2                 | 24                    | 0                   |
| 0,47                  | 25                     | 0                     | 18                  | 3                     | 32                  | 5                     | 32                  | 16                    | 32                  | 32                    | 32                  | 50                    | 20                  | 61                    | 3,5                 | 69                    | 0,4                 | 73                    | 0                   |
|                       | 45                     | 0                     | 18                  | 3                     | 32                  | 5                     | 32                  | 16                    | 32                  | 32                    | 32                  | 46                    | 18,5                | 56                    | 3,5                 | 63                    | 0,4                 | 68                    | 0                   |
|                       | 65                     | 0                     | 18                  | 3                     | 32                  | 5                     | 32                  | 16                    | 32                  | 32                    | 32                  | 42                    | 17                  | 52                    | 3                   | 58                    | 0,3                 | 62                    | 0                   |
|                       | 85                     | 0                     | 18                  | 3                     | 32                  | 5                     | 32                  | 16                    | 32                  | 32                    | 32                  | 38                    | 15,5                | 47                    | 3                   | 53                    | 0,3                 | 56                    | 0                   |
|                       | 125                    | 0                     | 9                   | 0,8                   | 10                  | 2                     | 10                  | 5                     | 10                  | 10                    | 10                  | 19                    | 7,5                 | 23                    | 1,5                 | 26                    | 0,2                 | 28                    | 0                   |
| 0,68                  | 25                     | 0                     | 18                  | 4                     | 32                  | 8                     | 32                  | 23                    | 32                  | 46                    | 32                  | 58                    | 16                  | 71                    | 3                   | 80                    | 0,3                 | 86                    | 0                   |
|                       | 45                     | 0                     | 18                  | 4                     | 32                  | 8                     | 32                  | 23                    | 32                  | 46                    | 32                  | 54                    | 15                  | 66                    | 2,5                 | 74                    | 0,3                 | 79                    | 0                   |
|                       | 65                     | 0                     | 18                  | 4                     | 32                  | 8                     | 32                  | 23                    | 32                  | 45                    | 31                  | 49                    | 13,5                | 60                    | 2,5                 | 68                    | 0,3                 | 72                    | 0                   |
|                       | 85                     | 0                     | 18                  | 4                     | 32                  | 8                     | 32                  | 23                    | 32                  | 41                    | 28                  | 45                    | 12,5                | 55                    | 2,5                 | 62                    | 0,3                 | 66                    | 0                   |
|                       | 125                    | 0                     | 9                   | 1                     | 10                  | 2                     | 10                  | 7                     | 10                  | 15                    | 10                  | 22                    | 6                   | 27                    | 1                   | 31                    | 0,1                 | 33                    | 0                   |
| 1                     | 25                     | 0,1                   | 18                  | 6                     | 32                  | 11                    | 32                  | 34                    | 32                  | 60                    | 28,5                | 67                    | 12,5                | 81                    | 2,5                 | 92                    | 0,3                 | 98                    | 0                   |
|                       | 45                     | 0,1                   | 18                  | 6                     | 32                  | 11                    | 32                  | 34                    | 32                  | 56                    | 26                  | 61                    | 11,5                | 75                    | 2                   | 85                    | 0,2                 | 90                    | 0                   |
|                       | 65                     | 0,1                   | 18                  | 6                     | 32                  | 11                    | 32                  | 34                    | 32                  | 51                    | 24                  | 56                    | 10,5                | 69                    | 2                   | 77                    | 0,2                 | 83                    | 0                   |
|                       | 85                     | 0,1                   | 18                  | 6                     | 32                  | 11                    | 32                  | 34                    | 32                  | 46                    | 22                  | 51                    | 9,5                 | 62                    | 2                   | 70                    | 0,2                 | 75                    | 0                   |
|                       | 125                    | 0                     | 9                   | 2                     | 10                  | 4                     | 10                  | 11                    | 10                  | 21                    | 10                  | 26                    | 5                   | 31                    | 0,9                 | 35                    | 0,1                 | 38                    | 0                   |
| 1,5                   | 25                     | 0,1                   | 18                  | 9                     | 32                  | 17                    | 32                  | 51                    | 32                  | 75                    | 23,5                | 83                    | 10,5                | 101                   | 2                   | 114                   | 0,2                 | 122                   | 0                   |
|                       | 45                     | 0,1                   | 18                  | 9                     | 32                  | 17                    | 32                  | 51                    | 32                  | 70                    | 22                  | 77                    | 9,5                 | 94                    | 2                   | 106                   | 0,2                 | 113                   | 0                   |
|                       | 65                     | 0,1                   | 18                  | 9                     | 32                  | 17                    | 32                  | 51                    | 32                  | 64                    | 20                  | 70                    | 9                   | 86                    | 1,5                 | 97                    | 0,2                 | 103                   | 0                   |
|                       | 85                     | 0,1                   | 18                  | 9                     | 32                  | 17                    | 32                  | 51                    | 32                  | 58                    | 18                  | 64                    | 8                   | 78                    | 1,5                 | 88                    | 0,2                 | 94                    | 0                   |
|                       | 125                    | 0                     | 9                   | 3                     | 10                  | 5                     | 10                  | 16                    | 10                  | 29                    | 9                   | 32                    | 4                   | 39                    | 0,7                 | 44                    | 0,1                 | 47                    | 0                   |
| 2,2                   | 25                     | 0,1                   | 18                  | 13                    | 32                  | 25                    | 32                  | 75                    | 32                  | 94                    | 20                  | 104                   | 9                   | 127                   | 1,5                 | 143                   | 0,2                 | 153                   | 0                   |
|                       | 45                     | 0,1                   | 18                  | 13                    | 32                  | 25                    | 32                  | 75                    | 32                  | 87                    | 18,5                | 96                    | 8                   | 117                   | 1,5                 | 132                   | 0,2                 | 141                   | 0                   |
|                       | 65                     | 0,1                   | 18                  | 13                    | 32                  | 25                    | 32                  | 72                    | 30,5                | 80                    | 17                  | 88                    | 7,5                 | 107                   | 1,5                 | 121                   | 0,2                 | 129                   | 0                   |
|                       | 85                     | 0,1                   | 18                  | 13                    | 32                  | 25                    | 32                  | 65                    | 27,5                | 73                    | 15,5                | 80                    | 7                   | 98                    | 1                   | 110                   | 0,1                 | 118                   | 0                   |
|                       | 125                    | 0,1                   | 9                   | 4                     | 10                  | 8                     | 10                  | 24                    | 10                  | 36                    | 7,5                 | 40                    | 3,5                 | 49                    | 0,6                 | 55                    | 0,1                 | 59                    | 0                   |



## SOLID ALUMINIUM CAPACITORS

- Enhanced capacitance
- Small type
- Axial leads; metal case; ceramic seal
- Long life
- High reliability
- Industrial and military applications



### QUICK REFERENCE DATA

Nominal capacitance range (E6 series)  
 Tolerance on nominal capacitance  
 Rated voltage range,  $U_R$   
 Category temperature range  
 Usable temperature range  
 Endurance test

Basic specification  
 Climatic category, IEC 68

DIN 40040  
 NF C20-600

Approval

2,2 to 2200  $\mu\text{F}$   
 $\pm 20\%$  ( $\pm 10\%$  to special order)  
 4 to 40 V  
 $-55$  to  $+125$   $^{\circ}\text{C}$   
 $-80$  to  $+200$   $^{\circ}\text{C}$   
 5000 h at  $125$   $^{\circ}\text{C}$   
 2000 h at  $150$   $^{\circ}\text{C}$   
 IEC 384-4, long-life grade  
 55/125/56  
 EHC/JQ/TW  
 434  
 Liste LNZ 44-04 COS-C  
 gam-t-1

Selection chart for  $C_{\text{nom}} \cdot U_R$  and relevant case sizes.

| $C_{\text{nom}}$ | $U_R$ (V) |     |    |    |    |     |    |    |
|------------------|-----------|-----|----|----|----|-----|----|----|
|                  | 4         | 6,3 | 10 | 16 | 20 | 25  | 35 | 40 |
| 2,2              |           |     |    |    |    |     | 1  | 1  |
| 3,3              |           |     |    |    |    |     | 1  | 1  |
| 4,7              |           |     |    |    |    |     | 1  | 1  |
| 6,8              |           |     |    |    |    |     | 1  | 1  |
| 10               |           |     |    | 1  | 1  | 1   | 2A | 2A |
| 15               |           |     |    | 1  | 1  | 1   | 2A | 2A |
| 22               |           |     |    | 1  |    | 2A  | 2A | 4  |
| 33               |           |     | 1  | 2A |    | 2A  | 4  | 4  |
| 47               |           | 1   | 1  | 2A | 2A | 2A* | 4  | 5  |
| 68               | 1         | 1   | 2A | 2A |    | 4   | 5  | 5  |
| 100              | 1         |     | 2A | 4  | 4  | 4   | 6  | 6  |
| 150              |           | 2A  | 4  | 4  | 5  | 5   | 6* |    |
| 220              | 2A        |     | 4  | 5  | 5  | 6   |    |    |
| 330              |           | 4   | 5  | 5  | 6  | 6   |    |    |
| 470              | 4         |     | 5  | 6  | 6  |     |    |    |
| 680              |           | 5   | 6  | 6  |    |     |    |    |
| 1000             | 5         | 6   | 6  |    |    |     |    |    |
| 1500             | 6         | 6   |    |    |    |     |    |    |
| 2200             | 6         |     |    |    |    |     |    |    |

| case size | nominal dimensions (mm)   |
|-----------|---------------------------|
| 1         | $\varnothing$ 6,5 x 15    |
| 2A        | $\varnothing$ 7,5 x 20    |
| 4         | $\varnothing$ 9 x 22,5    |
| 5         | $\varnothing$ 10 x 31,5   |
| 6         | $\varnothing$ 12,5 x 31,5 |

\* Available to special order.

## APPLICATION

These capacitors with high CU-product per unit volume, utilize advanced technology to achieve long life, high stability, excellent reliability, high ripple current rating and low temperature dependence.

The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

The taped versions are suitable for automatic insertion and for cutting and forming equipment.

## DESCRIPTION

The capacitors have highly etched aluminium foil electrodes separated by a layer of glass fabric and filled with solid, semiconductive, pyrolytically formed manganese dioxide. The capacitors are housed in an aluminium case and are sealed by a ceramic disc. The cathode lead is welded to the case.

The capacitors are available in 4 styles, all with soldered-copper leads;

style 1: axial leads, case insulated with a blue transparent plastic sleeve; supplied on bandoliers in box;

style 2: as style 1, however supplied on bandoliers on reel;

style 3: single-ended, case insulated with a blue transparent plastic sleeve;

style 4: single-ended, case fitted in a yellow plastic foot; available to special order.

Note: A special version is available, which is partly epoxy-filled, withstanding severe shock and vibration tests; see also paragraph "Tests and requirements".

## MECHANICAL DATA

Dimensions in mm

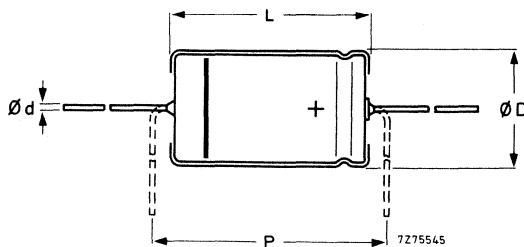


Fig. 1a Styles 1 and 2; for dimensions d, D, L and P, see Table 1a.

Table 1a

| case size | d*  |         | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> | mass** approx. g |
|-----------|-----|---------|------------------|------------------|------------------|------------------|------------------|------------------|
| 1         | 0,6 | } +0,06 | 6,5              | 15               | 6,7              | 15,3             | 20               | 1,2              |
| 2A        | 0,6 |         | 7,5              | 20               | 7,6              | 20,4             | 22,5             | 2,4              |
| 4         | 0,6 | } -0,05 | 9                | 22,5             | 9,3              | 23,3             | 25               | 3,3              |
| 5         | 0,8 |         | 10               | 31,5             | 10,3             | 32               | 35               | 4,5              |
| 6         | 0,8 | } -0,05 | 12,5             | 31,5             | 12,9             | 32               | 35               | 6,3              |

\* Tolerance according to IEC 301; not applicable to a length of 2 mm from the lead ends, which is covered by the bandoliers.

\*\* Add 10% for epoxy-filled version.





Fig. 1b Style 3; for dimensions d, D and L see Table 1a. Available to special order.

Fig. 1c Style 4; for dimensions d, D, L and P see Table 1a. Available to special order.

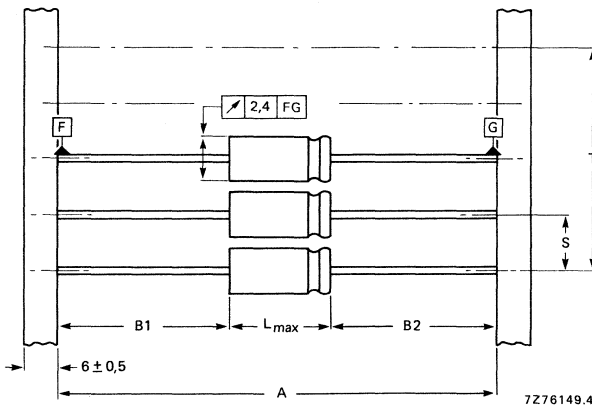


Fig. 2 Capacitors (style 1 and 2) on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 1b for dimensions A, S, T and  $L_{max}$ .  $|B1 - B2| = 1,4 + (L_{max} - L)$  mm max.

Table 1b

| case size | A            | S             | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|--------------|---------------|--------------------------------|------------------|-----------|
|           |              |               | $n < 50$                       | $50 < n < 100$   |           |
| 1         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 15,3      |
| 2A        | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 20,4      |
| 4         | $73 \pm 1,6$ | $10 \pm 0,4$  | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 23,3      |
| 5         | $73 \pm 1,6$ | $15 \pm 0,75$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 32        |
| 6         | $73 \pm 1,6$ | $15 \pm 0,75$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 32        |

**Marking**

The capacitors are marked with: group number (123), capacitance, tolerance, rated voltage at corresponding maximum temperature, date code, a band to identify the negative terminal, "+" signs for the positive terminal and name of manufacturer.

**Mounting**


No special provisions are required for soldering to the tinned leads.  
(2 mm of the anode lead nearest the body are not solderable).

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.  
See also the corresponding paragraphs.

**Table 2**

| UR*  | nom. cap.<br>µF | max. r.m.s. ripple current at T <sub>amb</sub> = 125 °C, no d.c. voltage applied<br>mA | max. d.c. leakage current at UR after 1 min**<br>µA | max. tan δ | max. ESR<br>Ω | max. impedance at 100 kHz**<br>Ω | case size | catalogue number ▲ 2222 123 followed by |         |
|------|-----------------|--|---|------------|---------------|----------------------------------|-----------|---|---------|
|      |                 |  |   |            |               |                                  |           | style 1                                 | style 2 |
| 4    | 68              | 53   | 19  | 0,25       | 7,3           | 1,2                              | 1         | 12689                                   | 22689   |
|      | 100             | 77   | 28  | 0,25       | 5,0           | 1,2                              | 1         | 12101                                   | 22101   |
|      | 220             | 160  | 60  | 0,25       | 2,3           | 1,0                              | 2A        | 12221                                   | 22221   |
|      | 470             | 300  | 130   | 0,25       | 1,1           | 0,4                              | 4         | 12471                                   | 22471   |
|      | 1000            | 630  | 280   | 0,25       | 0,50          | 0,3                              | 5         | 12102                                   | 22102   |
|      | 1500            | 950  | 420   | 0,25       | 0,33          | 0,2                              | 6         | 12152                                   | 22152   |
| 6,3  | 2200            | 1250   | 610   | 0,25       | 0,23          | 0,2                              | 6         | 12222                                   | 22222   |
|      | 47              | 58   | 21  | 0,18       | 7,6           | 1,2                              | 1         | 13479                                   | 23479   |
|      | 68              | 83   | 30  | 0,18       | 5,3           | 1,2                              | 1         | 13689                                   | 23689   |
|      | 150             | 160  | 65  | 0,18       | 2,4           | 1,0                              | 2A        | 13151                                   | 23151   |
|      | 330             | 330  | 150   | 0,18       | 1,1           | 0,4                              | 4         | 13331                                   | 23331   |
|      | 680             | 680  | 300   | 0,18       | 0,55          | 0,3                              | 5         | 13681                                   | 23681   |
| 1000 | 940             | 940  | 440   | 0,18       | 0,36          | 0,2                              | 6         | 13102                                   | 23102   |
|      | 1500            | 1220   | 660   | 0,18       | 0,24          | 0,2                              | 6         | 13152                                   | 23152   |




epoxy-filled version

\* Up to T<sub>amb</sub> = 125 °C.

\*\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.

▲ Catalogue numbers are given for capacitors with tolerance ± 20%; for ± 10% tolerance replace the first digits in the columns by 4 (style 1), 7 (epoxy-filled version) or 8 (epoxy-filled version, level S certified).

| UR* | nom. cap. $\mu F$ | max. r.m.s. ripple current at $T_{amb} = 125\text{ }^{\circ}C$ , no d.c. voltage applied | max. d.c. leakage current at $U_R$ after 1 min** | max. $\tan \delta$ | max. ESR | max. impedance at 100 kHz** | case size | catalogue number▲ 2222 123 followed by |         | epoxy-filled version |
|-----|-------------------|--|--|--------------------|----------|-----------------------------|-----------|--|---------|----------------------|
|     |                   |  |  |                    |          |                             |           | style 1                                | style 2 |                      |
| 10  | 33                | 63   | 23   | 0,18               | 11       | 1,2                         | 1         | 14339                                  | 24339   | 64339                |
|     | 47                | 83   | 35   | 0,18               | 7,6      | 1,2                         | 1         | 14479                                  | 24479   | 64479                |
|     | 68                | 110  | 50   | 0,18               | 5,3      | 1,0                         | 2A        | 14689                                  | 24689   | 64689                |
|     | 100               | 160  | 70   | 0,18               | 3,6      | 1,0                         | 2A        | 14101                                  | 24101   | 64101                |
|     | 150               | 240  | 100  | 0,18               | 2,4      | 0,4                         | 4         | 14151                                  | 24151   | 64151                |
|     | 220               | 350  | 150  | 0,18               | 1,7      | 0,4                         | 4         | 14221                                  | 24221   | 64221                |
|     | 330               | 490  | 230  | 0,18               | 1,1      | 0,3                         | 5         | 14331                                  | 24331   | 64331                |
|     | 470               | 570  | 330  | 0,18               | 0,8      | 0,3                         | 5         | 14471                                  | 24471   | 64471                |
|     | 680               | 760  | 480  | 0,18               | 0,55     | 0,2                         | 6         | 14681                                  | 24681   | 64681                |
|     | 1000              | 1000   | 700  | 0,18               | 0,36     | 0,2                         | 6         | 14102                                  | 24102   | 64102                |
| 16  | 10                | 31   | 16   | 0,14               | 28       | 2,5                         | 1         | 15109                                  | 25109   | 65109                |
|     | 15                | 47   | 24   | 0,14               | 19       | 2,5                         | 1         | 15159                                  | 25159   | 65159                |
|     | 22                | 63   | 35   | 0,14               | 13       | 2,5                         | 1         | 15229                                  | 25229   | 65229                |
|     | 33                | 89   | 55   | 0,14               | 8,4      | 2,0                         | 2A        | 15339                                  | 25339   | 65339                |
|     | 47                | 120  | 75   | 0,14               | 5,9      | 2,0                         | 2A        | 15479                                  | 25479   | 65479                |
|     | 68                | 180  | 110  | 0,14               | 4,1      | 2,0                         | 2A        | 15689                                  | 25689   | 65689                |
|     | 100               | 260  | 160  | 0,14               | 2,8      | 0,8                         | 4         | 15101                                  | 25101   | 65101                |
|     | 150               | 310  | 240  | 0,16               | 2,1      | 0,8                         | 4         | 15151                                  | 25151   | 65151                |
|     | 220               | 420  | 350  | 0,16               | 1,5      | 0,6                         | 5         | 15221                                  | 25221   | 65221                |
|     | 330               | 510  | 500  | 0,16               | 1,0      | 0,6                         | 5         | 15331                                  | 25331   | 65331                |
| 470 | 680               | 750  | 0,16   | 0,7                | 0,4      | 6                           | 15471     | 25471                                  | 65471   |                      |
| 680 | 850               | 870  | 0,16   | 0,5                | 0,4      | 6                           | 15681     | 25681                                  | 65681   |                      |




\* Up to  $T_{amb} = 125\text{ }^{\circ}C$ .

\*\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.

▲ Catalogue numbers are given for capacitors with tolerance  $\pm 20\%$ ; for  $\pm 10\%$  tolerance replace the first digits in the columns by 4 (style 1), 7 (epoxy-filled version) or 8 (epoxy-filled version, level S certified).



| U <sub>R</sub> *                  | nom. cap. $\mu\text{F}$ | max. r. m.s. ripple current at T <sub>amb</sub> = 125 °C, no d.c. voltage applied mA | max. d.c. leakage current at U <sub>R</sub> after 1 min** $\mu\text{A}$ | max. tan $\delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz** $\Omega$ | case size | catalogue number $\blacktriangle$ 2222 123 followed by  |   |              |
|-----------------------------------|-------------------------|--|---|-------------------|-------------------|--------------------------------------|-----------|---|---|--------------|
| V                                 | $\mu\text{F}$           | mA   | $\mu\text{A}$   |                   | $\Omega$          | $\Omega$                             |           | <br>style 1                      style 2                      epoxy-filled version |   |              |
| 20                                | 10                      | 39   | 20  | 0,14              | 28                | 2,5                                  | 1         | see Table 2a  |   |              |
|                                   | 15                      | 52   | 30  | 0,14              | 19                | 2,5                                  | 1         |   |   |              |
|                                   | 47                      | 150  | 95  | 0,14              | 5,9               | 2,0                                  | 2A        |   |   |              |
|                                   | 100                     | 270  | 200   | 0,14              | 2,8               | 0,8                                  | 4         |   |   |              |
|                                   | 150                     | 350  | 300   | 0,16              | 2,1               | 0,6                                  | 5         |   |   |              |
|                                   | 220                     | 420  | 440   | 0,16              | 1,5               | 0,6                                  | 5         |   |   |              |
|                                   | 330                     | 570  | 660   | 0,16              | 1,0               | 0,4                                  | 6         |   |   |              |
|                                   | 470                     | 720  | 940   | 0,16              | 0,7               | 0,4                                  | 6         |   |   |              |
|                                   | 25                      | 10   | 43  | 25                | 0,14              | 28                                   | 5         |   | 1 | see Table 2a |
|                                   |                         | 15   | 60  | 35                | 0,14              | 19                                   | 5         |   | 1 |              |
| 22                                |                         | 88   | 55  | 0,14              | 13                | 2,5                                  | 2A        |   |   |              |
| 33                                |                         | 130  | 85  | 0,14              | 8,4               | 2,5                                  | 2A        |   |   |              |
| 47 $\blacktriangle\blacktriangle$ |                         | 160  | 100   | 0,14              | 5,9               | 2,5                                  | 2A        |   |   |              |
| 68                                |                         | 230  | 170   | 0,14              | 4,1               | 1,0                                  | 4         |   |   |              |
| 100                               |                         | 250  | 250   | 0,16              | 3,1               | 1,0                                  | 4         |   |   |              |
| 150                               |                         | 350  | 400   | 0,16              | 2,1               | 0,8                                  | 5         |   |   |              |
| 220                               |                         | 460  | 550   | 0,16              | 1,5               | 0,6                                  | 6         |   |   |              |
| 330                               |                         | 600  | 800   | 0,16              | 1,0               | 0,6                                  | 6         |   |   |              |

\* Up to T<sub>amb</sub> = 125 °C.


\*\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.

$\blacktriangle$  Catalogue numbers are given for capacitors with tolerance  $\pm 20\%$ ; for  $\pm 10\%$  tolerance replace the first digits in the columns by 4 (style 1),

$\blacktriangle\blacktriangle$  7 (epoxy-filled version) or 8 (epoxy-filled version, level S certified).

$\blacktriangle\blacktriangle$  Available to special order.

| U <sub>R</sub> * | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at T <sub>amb</sub> = 125 °C, no d.c. voltage applied mA | max. d.c. leakage current at U <sub>R</sub> after 1 min** $\mu\text{A}$ | max. tan $\delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz** $\Omega$ | case size | catalogue number ▲ 2222 123 followed by |                              |       |       |
|------------------|-------------------------|---|---|-------------------|-------------------|--------------------------------------|-----------|---|------------------------------|-------|-------|
|                  |                         |   |   |                   |                   |                                      |           | style 1                                 | style 1 epoxy-filled version |       |       |
| 35               | 2,2                     | 10  | 5   | 0,12              | 109               | 7,5                                  | 1         | 97228                                   | 20228                        | 60228 |       |
|                  | 3,3                     | 14  | 7   | 0,12              | 73                | 7,5                                  | 1         | 97338                                   | 20338                        | 60338 |       |
|                  | 4,7                     | 20  | 10  | 0,12              | 51                | 7,5                                  | 1         | 97478                                   | 20478                        | 60478 |       |
|                  | 6,8                     | 27  | 15  | 0,12              | 35                | 7,5                                  | 1         | 97688                                   | 20688                        | 60688 |       |
|                  | 10                      | 37  | 20  | 0,12              | 24                | 2,5                                  | 2A        | 97109                                   | 20109                        | 60109 |       |
|                  | 15                      | 53  | 30  | 0,12              | 16                | 2,5                                  | 2A        | 97159                                   | 20159                        | 60159 |       |
|                  | 22                      | 78  | 45  | 0,12              | 11                | 2,5                                  | 2A        | 97229                                   | 20229                        | 60229 |       |
|                  | 33                      | 120   | 65  | 0,12              | 7,2               | 1,0                                  | 4         | 97339                                   | 20339                        | 60339 |       |
|                  | 47                      | 140   | 95  | 0,12              | 5,1               | 1,0                                  | 4         | 97479                                   | 20479                        | 60479 |       |
|                  | 68                      | 170   | 135   | 0,16              | 4,7               | 0,8                                  | 5         | 97689                                   | 20689                        | 60689 |       |
|                  | 100                     | 220   | 200   | 0,16              | 3,2               | 0,6                                  | 6         | 97101                                   | 20101                        | 60101 |       |
|                  | 150▲▲                   | 290   | 300   | 0,16              | 2,1               | 0,6                                  | 6         | 97151                                   | 20151                        | 60151 |       |
|                  | 40                      | 2,2   | 11  | 9                 | 0,12              | 109                                  | 7,5       | 1                                       | 17228                        | 27228 | 67228 |
|                  |                         | 3,3   | 16  | 13                | 0,12              | 73                                   | 7,5       | 1                                       | 17338                        | 27338 | 67338 |
|                  |                         | 4,7   | 22  | 19                | 0,12              | 51                                   | 7,5       | 1                                       | 17478                        | 27478 | 67478 |
|                  |                         | 6,8   | 28  | 27                | 0,12              | 35                                   | 7,5       | 1                                       | 17688                        | 27688 | 67688 |
|                  |                         | 10  | 41  | 40                | 0,12              | 24                                   | 2,5       | 2A                                      | 17109                        | 27109 | 67109 |
| 15               |                         | 61  | 60  | 0,12              | 16                | 2,5                                  | 2A        | 17159                                   | 27159                        | 67159 |       |
| 22               |                         | 89  | 90  | 0,12              | 11                | 1,5                                  | 4         | 17229                                   | 27229                        | 67229 |       |
| 33               |                         | 120   | 130   | 0,12              | 7,2               | 1,0                                  | 4         | 17339                                   | 27339                        | 67339 |       |
| 47               |                         | 160   | 190   | 0,12              | 5,1               | 1,0                                  | 5         | 17479                                   | 27479                        | 67479 |       |
| 68               |                         | 170   | 270   | 0,16              | 4,7               | 0,8                                  | 5         | 17689                                   | 27689                        | 67689 |       |
| 100              | 220                     | 400   | 0,16  | 3,2               | 0,6               | 6                                    | 17101     | 27101                                   | 67101                        |       |       |



\* Up to T<sub>amb</sub> = 125 °C.  
 \*\* Capacitors with lower values of max. d.c. leakage current or max. impedance are available to special order.  
 ▲ Catalogue numbers are given for capacitors with tolerance  $\pm 20\%$ ; for  $\pm 10\%$  tolerance replace the first digits in the columns by 4 (style 1), 7 (epoxy-filled version) or 8 (epoxy-filled version, level S certified).  
 ▲▲ Available to special order.

Table 2a

| U <sub>R</sub> * | case size | catalogue number 2222 123 followed by |            |            |            |                      |            |                   |
|------------------|-----------|---------------------------------------|------------|------------|------------|----------------------|------------|-------------------|
|                  |           | style 1                               |            | style 2    |            | epoxy-filled version |            |                   |
| V                |           | tol. ± 20%                            | tol. ± 10% | tol. ± 20% | tol. ± 10% | tol. ± 20%           | tol. ± 10% | level S certified |
| 20               | 1         | 90037                                 | 90137      | 90057      | 90157      | 90077                | 90177      | 90277             |
|                  | 1         | 90038                                 | 90138      | 90058      | 90158      | 90078                | 90178      | 90278             |
|                  | 2A        | 90042                                 | 90142      | 90062      | 90162      | 90082                | 90182      | 90282             |
|                  | 4         | 90044                                 | 90144      | 90064      | 90164      | 90084                | 90184      | 90284             |
|                  | 5         | 90045                                 | 90145      | 90065      | 90165      | 90085                | 90185      | 90285             |
|                  | 5         | 90046                                 | 90146      | 90066      | 90166      | 90086                | 90186      | 90286             |
|                  | 6         | 90047                                 | 90147      | 90067      | 90167      | 90087                | 90187      | 90287             |
|                  | 6         | 90048                                 | 90148      | 90068      | 90168      | 90088                | 90188      | 90288             |

\* Up to T<sub>amb</sub> = 125 °C.

**Capacitance**

Nominal capacitance values at 100 Hz  
and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$  ( $\pm 10\%$  to special order)

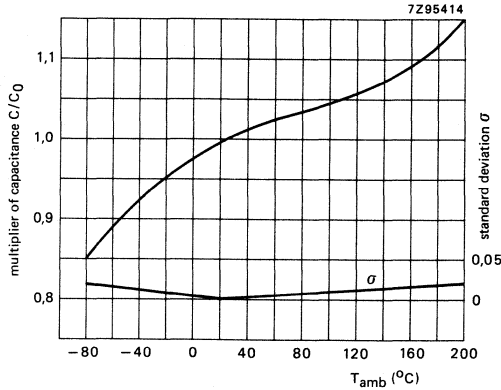


Fig. 3 Typical multiplier of capacitance as a function of ambient temperature.  
 $C_0$  = capacitance at  $25\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

Rated voltage =

max. permissible voltage

$$U_R$$

Derated voltage =

max. permissible voltage at  
 $T_{amb}$  from  $125\text{ }^{\circ}\text{C}$  to  $200\text{ }^{\circ}\text{C}$

$$0,63 \times U_R$$

Surge voltage =

max. permissible voltage for short periods at  $T_{amb} = 125\text{ }^{\circ}\text{C}$   
(see also "Test and requirements")

$$1,15 \times U_R$$

Reverse voltage =

max. d.c. voltage continuously (2000 h)  
applied in the reverse polarity,  
at  $T_{amb} \leq 85\text{ }^{\circ}\text{C}$   
at  $85\text{ }^{\circ}\text{C} < T_{amb} \leq 125\text{ }^{\circ}\text{C}$

$$0,30 \times U_R$$

$$0,15 \times U_R$$

Ripple voltage =

max. permissible a.c. voltage providing the following four conditions are met:

- a) Max. a.c. voltage, with negative d.c. voltage applied
- b) Max. peak a.c. voltage, without d.c. voltage applied

2 V

$$U_R \times M_F \times M_T$$

$M_F$  = frequency multiplier, see Table below,  
 $M_T$  = capacitor core temperature multiplier;  
 $M_T = 1$  for core temperatures  $\leq 85$  °C,  
 $M_T = 1100 / (T_{\text{core}} + 273) - 2,06$  for core temperatures  $> 85$  °C.

| frequency (Hz) | $M_F$             |
|----------------|-------------------|
| $\leq 0,1$     | $0,30 \times U_R$ |
| $> 0,1$ to 1   | $0,45 \times U_R$ |
| $> 1$ to 10    | $0,60 \times U_R$ |
| $> 10$ to 50   | $0,65 \times U_R$ |
| $> 50$         | $0,80 \times U_R$ |

- c) Momentary value of applied voltage, with positive d.c. voltage applied

between  $U_R$  (in the positive half wave) and the limits mentioned under b) (in the negative half wave)

- d) Ripple voltage limits are not applicable if the maximum ripple current is exceeded. In that case the ripple current is decisive. Whichever is in practice decisive, depends on the actual impedance of the capacitor. In the Survey at the end of this data sheet the ripple current and ripple voltage limits can be found for each capacitor.

### Ripple current

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{\text{amb}} = 125$  °C

see Table 2

Maximum permissible r.m.s. ripple current at other frequencies and temperatures, at standard condition\*

see Survey at the end of this data sheet

Maximum permissible r.m.s. ripple current at various application conditions

see Table 3

\* See Table 3, condition A.

**Table 3** Multiplier of ripple current for various application conditions

| condition   | multiplier  |
|---|---|
| A. Standard condition: capacitor insulated with a blue sleeve, mounted horizontally on a vertical printed-circuit board with thermal conductivity of $0,4 \text{ Wm}^{-1}\text{K}^{-1}$ , in free flowing air and in a surrounding that allows the absorption of radiation heat at $125 \text{ }^\circ\text{C}$ . | 1,0   |
| B. As under A but capacitor is not insulated.   | 0,83  |
| C. As under A but capacitor is mounted horizontally at the bottom of a horizontal printed-circuit board   | 0,96  |
| D. As under A but capacitor is mounted on a thermally well-conducting printed-circuit board.  | 1,08  |
| E. As under A but capacitor is mounted on a thermally non-conducting printed-circuit board.   | 0,90  |
| F. As under A but the surrounding walls etc. have a temperature higher than $125 \text{ }^\circ\text{C}$ and therefore prevent the absorption of heat by radiation  | 0,86  |
| G. Capacitor has an ESR value lower than the maximum ESR.   | $\sqrt{\frac{\text{ESR}_{\text{max}}}{\text{ESR}_{\text{actual}}}}$ |
| H. As under A but capacitor is applied in low-density air, in particular at 10 km height.   | 0,94  |
| J. As under A but capacitor is epoxy-filled (for severe shock and vibration resistance).  | 1,16  |

**Notes**

- If required the various multiplying factors can be multiplied together, e.g. if conditions B and C apply the multiplier is  $0,83 \times 0,96$ .
- Neither the maximum permissible ripple current nor the maximum permissible ripple voltage values are to be exceeded. Refer to the Tables at the end of this data sheet to find whether a current increase is permissible by the voltage limits.

*Calculation of ripple currents*

The maximum permissible ripple current ( $I_{r \max}$ ) is a function of temperature and frequency:

$$I_{r \max} = I_{r0} \sqrt{kr}$$

where  $I_{r0}$  = max. ripple current at 100 Hz and 125 °C (see Table 2);  
 $\sqrt{k}$  = temperature multiplier (neglecting the frequency dependence) =  $\sqrt{P_{\max}/P_{125}}$ ;  
 $\sqrt{r}$  = frequency multiplier (neglecting the temperature dependence) =  $\sqrt{ESR_{100}/ESR_{\max}}$ ;

while  $P_{\max}$  = max. permissible power dissipation, temperature dependent;  
 $P_{125}$  = max. permissible power dissipation at 125 °C =  $I_{r0}^2 ESR_{100}$ ;  
 $ESR_{\max}$  = max. equivalent series resistance, frequency dependent;  
 $ESR_{100}$  = max. equivalent series resistance at 100 Hz.

The formula is derived for any temperature and frequency as follows:

$$I_{r \max}^2 = P_{\max}/ESR_{\max}$$

$$= kr P_{125}/ESR_{100}$$

$$= kr I_{r0}^2 ESR_{100}/ESR_{100}$$

Thus  $I_{r \max} = I_{r0} \sqrt{kr}$ .

The values of the temperature multiplier  $\sqrt{k}$  and  $P_{125}$  have been calculated allowing a capacitor core temperature of 145 °C and assuming the values of  $ESR_{\max}$  to be independent of temperature at all frequencies.

The values of the frequency multiplier  $\sqrt{r}$  have been measured at 25 °C and 125 °C assuming to be the same at all temperatures.

The power dissipation ( $P_{\max}$ ) has been calculated assuming it to be governed by the simplified relation:

$$P_{\max} = (\beta S + \gamma) \Delta T$$

where  $\beta$  = total heat transfer coefficient, comprising internal and external heat transfer, with exception of case ends and leads;  
 $S$  = capacitor outer surface;  
 $\gamma$  = correction factor covering the heat conduction through case end and leads;  
 $\Delta T$  = temperature difference between capacitor core and the ambient atmosphere, taken as 20 °C at  $T_{\text{amb}} = 125$  °C.

For this calculation the standard condition (A, Table 3) has been assumed; in that case the following numerical values apply:

| case         | $\beta$ (Wm <sup>-2</sup> K <sup>-1</sup> ) | $\gamma$ (WK <sup>-1</sup> ) | $P_{\max}$ (W) = $P_{125}$ |
|--------------|---|------------------------------|----------------------------|
| 1            | 6,2   | 0,0042                       | 0,13                       |
| 2A           | 7,2   | 0,0042                       | 0,16                       |
| 4            | 8,5   | 0,0042                       | 0,21                       |
| 5            | 8,0   | 0,0042                       | 0,26                       |
| 6, low cap.  | 7,7   | 0,0042                       | 0,32                       |
| 6, high cap. | 9,2   | 0,0042                       | 0,36                       |

The results for all combinations of ESR and case size are shown in Fig. 4.

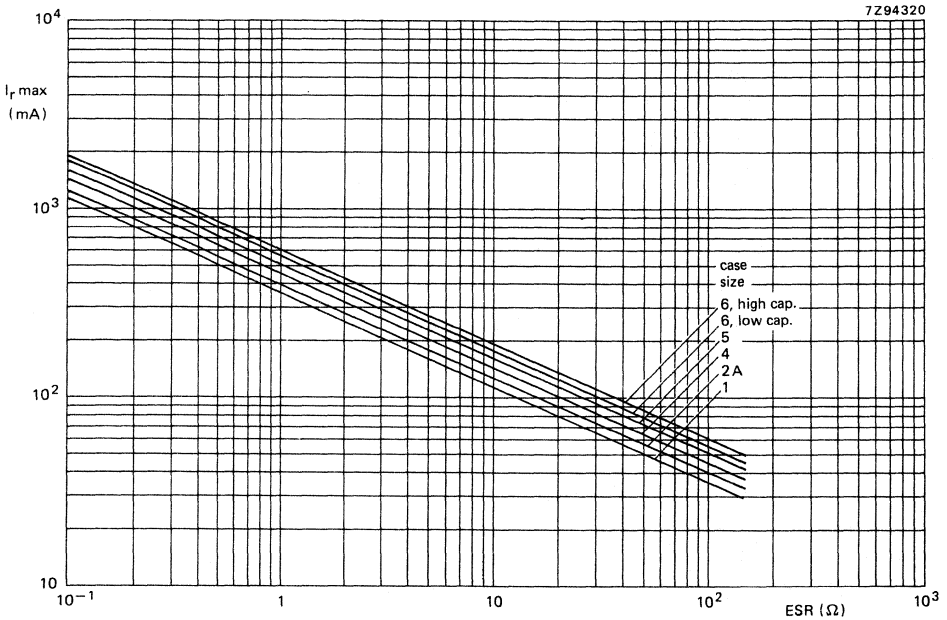


Fig. 4 Maximum permissible r.m.s. ripple current at  $T_{amb} = 125\text{ }^{\circ}\text{C}$  as a function of ESR, at standard condition (A, Table 3).

As the ripple current and the ripple voltage depend on the capacitor impedance, which has a certain spread, one of the following situations occur:

- only the current is limiting;
- only the voltage is limiting;
- both current and voltage are limiting.

The tables at the end of this data sheet show the worst-case calculation: if the limiting current value given in the tables is applied, the voltage limit mentioned in "Ripple voltage, b", is not exceeded; if the limiting voltage value given in the tables is applied, the current limit calculated as in "Calculation of ripple currents" is not exceeded.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.



**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$ ,  
at  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2 (max. 0,1 CU)

Maximum d.c. leakage current during continuous operation  
at  $U_R$ ,

at  $T_{amb} = 25\text{ }^\circ\text{C}$

at  $T_{amb} = 85\text{ }^\circ\text{C}$

at  $T_{amb} = 125\text{ }^\circ\text{C}$

approx. 0,5 x value stated in Table 2

approx. 2 x value stated in Table 2

approx. 7 x value stated in Table 2

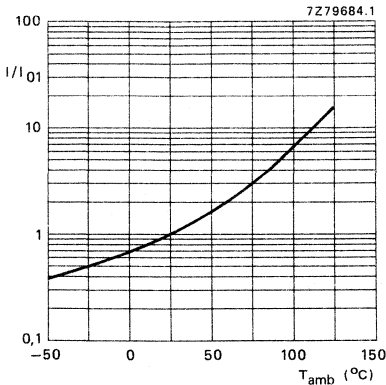


Fig. 5 Multiplier  $I/I_{01}$  as a function of temperature.  $I_{01}$  = d.c. leakage current during continuous operation at  $U_R$ ,  $T_{amb} = 25\text{ }^\circ\text{C}$ .

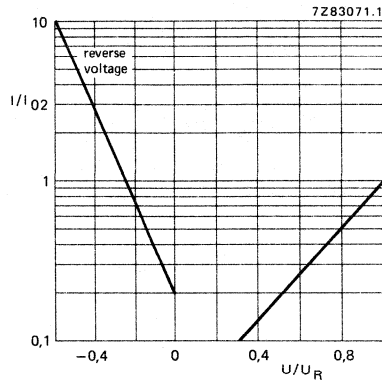


Fig. 6 Multiplier  $I/I_{02}$  as a function of  $U/U_R$ .  $I_{02}$  = d.c. leakage current at  $U_R$  at a discrete constant temperature

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Typical tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

0,6 x value stated in Table 2

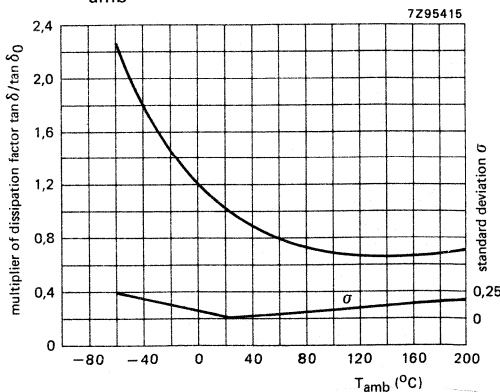


Fig. 7 Multiplier of dissipation factor as a function of ambient temperature;  $\tan \delta_0$  = dissipation factor at  $25\text{ }^\circ\text{C}$ , 100 Hz.

**Equivalent series resistance (ESR =  $\tan \delta / \omega C$ )**

Maximum ESR at 100 Hz and  $T_{amb} = 25 \text{ }^\circ\text{C}$  (calculated from maximum  $\tan \delta$  and  $0,8 \times$  nominal capacitance)


Maximum ESR at 100 kHz and  $T_{amb} = 25 \text{ }^\circ\text{C}$

Typical ESR

see Table 2


equal to values of max. impedance at 100 kHz, see Table 2

see graphs below; the standard deviation is 20% of each value

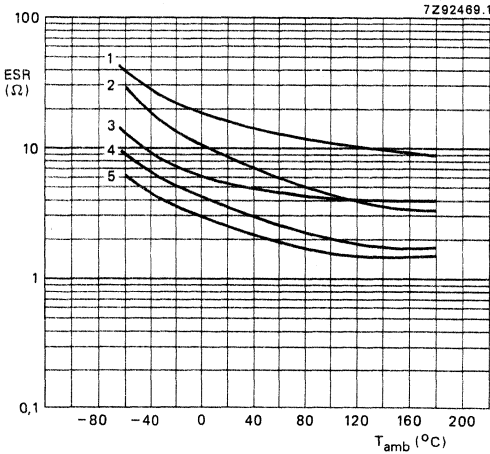

- Curve 1 = 10  $\mu\text{F}$ , 20 V and 25 V, and 6,8  $\mu\text{F}$ , 35 V and 40 V;
- curve 2 = 10  $\mu\text{F}$ , 16 V;
- curve 3 = 22  $\mu\text{F}$ , 16 V;
- curve 4 = 33  $\mu\text{F}$ , 10 V;
- curve 5 = 47  $\mu\text{F}$ , 6,3 V and 10 V, and 68  $\mu\text{F}$ , 4 V and 6,3 V.

Fig. 8 Typical ESR as a function of ambient temperature at 100 Hz, case size 1.

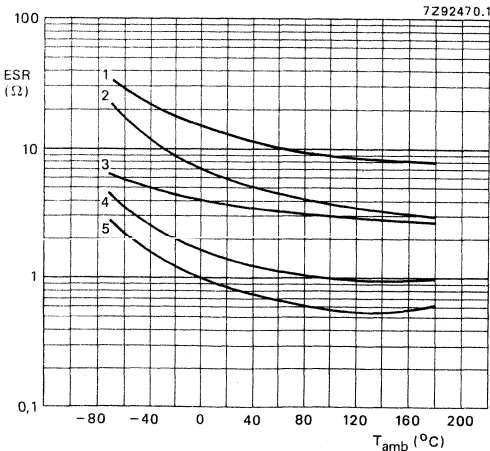

- Curve 1 = 10  $\mu\text{F}$ , 35 and 40 V;
- curve 2 = 33  $\mu\text{F}$ , 25 V;
- curve 3 = 47  $\mu\text{F}$ , 20 V and 25 V;
- curve 4 = 68  $\mu\text{F}$ , 10 V and 150  $\mu\text{F}$ , 6,3 V;
- curve 5 = 100  $\mu\text{F}$ , 10 V.

Fig. 9 Typical ESR as a function of ambient temperature at 100 Hz, case size 2A.

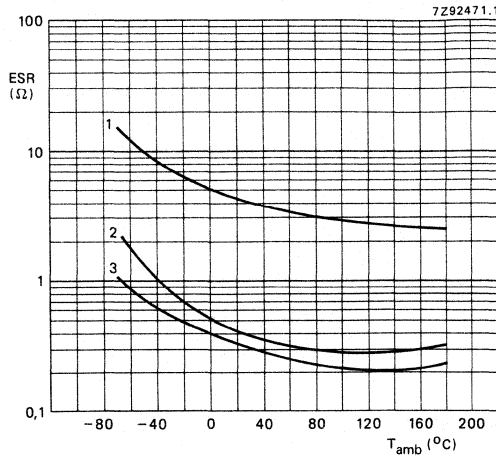


Fig. 10 Typical ESR as a function of ambient temperature at 100 Hz, case size 4.

Curve 1 = 33  $\mu$ F, 35 V and 40 V;

curve 3 = 470  $\mu$ F, 4 V.

curve 2 = 220  $\mu$ F, 10 V and 330  $\mu$ F, 6,3 V;

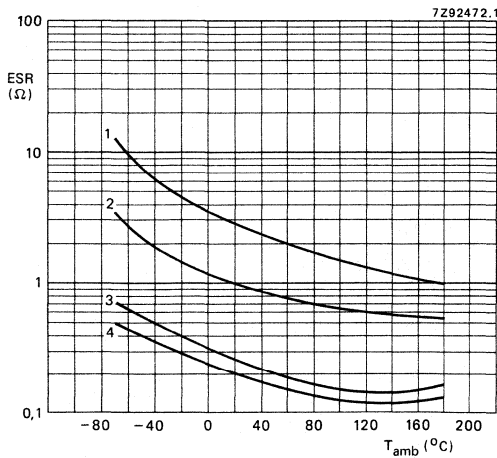


Fig. 11 Typical ESR as a function of ambient temperature at 100 Hz, case size 5.

Curve 1 = 68  $\mu$ F, 35 V and 40 V;

curve 3 = 330  $\mu$ F, 10 V;

curve 2 = 150  $\mu$ F, 20 V and 25 V;

curve 4 = 470  $\mu$ F, 10 V.

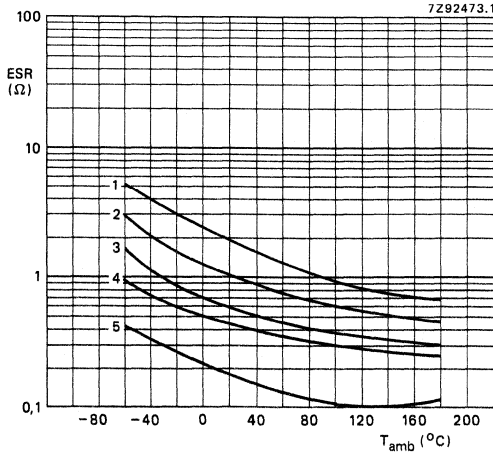


Fig. 12 Typical ESR as a function of ambient temperature at 100 Hz, case size 6.

Curve 1 = 100  $\mu$ F, 35 and 40 V;

curve 2 = 150  $\mu$ F, 35 V;

curve 3 = 220  $\mu$ F, 25 V;

curve 4 = 470  $\mu$ F, 16 V;

curve 5 = 1000  $\mu$ F, 6,3 V and

680  $\mu$ F, 10 V.

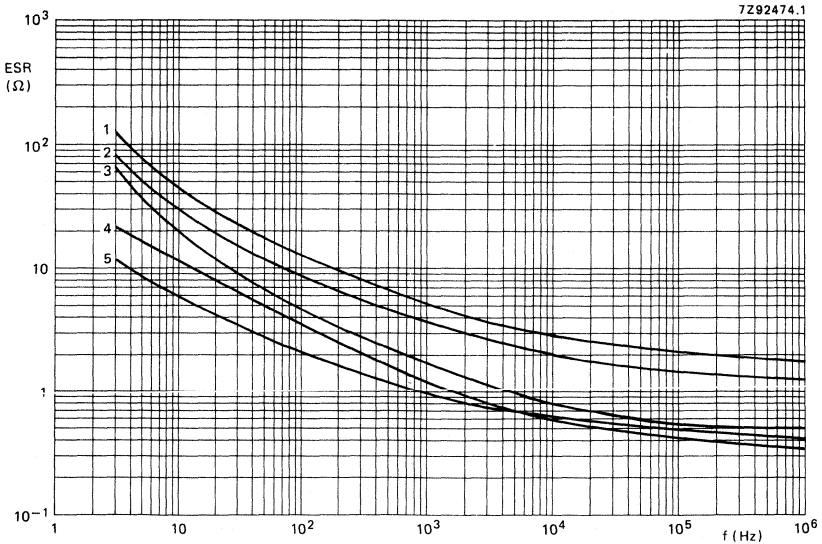


Fig. 13 Typical ESR as a function of frequency at  $T_{amb} = 25$  °C, case size 1.

Curve 1 = 10  $\mu$ F, 20 V and 25 V, and

6,8  $\mu$ F, 35 V and 40 V;

curve 2 = 10  $\mu$ F, 16 V;

curve 3 = 22  $\mu$ F, 16 V;

curve 4 = 33  $\mu$ F, 10 V;

curve 5 = 68  $\mu$ F, 4 V and 6,3 V, and  
47  $\mu$ F, 6,3 V and 10 V.

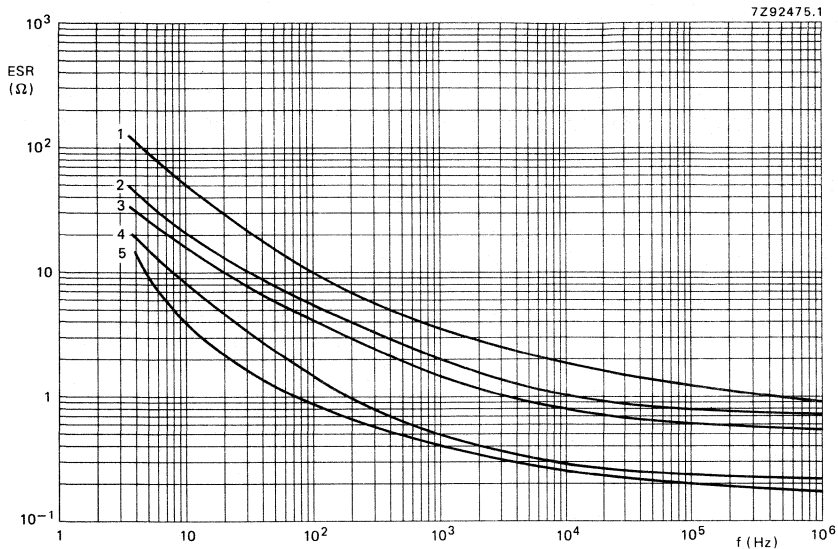


Fig. 14 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 2A.

Curve 1 = 10  $\mu\text{F}$ , 35 V and 40 V;

curve 4 = 68  $\mu\text{F}$ , 10 V, and

curve 2 = 33  $\mu\text{F}$ , 25 V;

150  $\mu\text{F}$ , 6,3 V;

curve 3 = 47  $\mu\text{F}$ , 20 V and 25 V;

curve 5 = 100  $\mu\text{F}$ , 10 V.

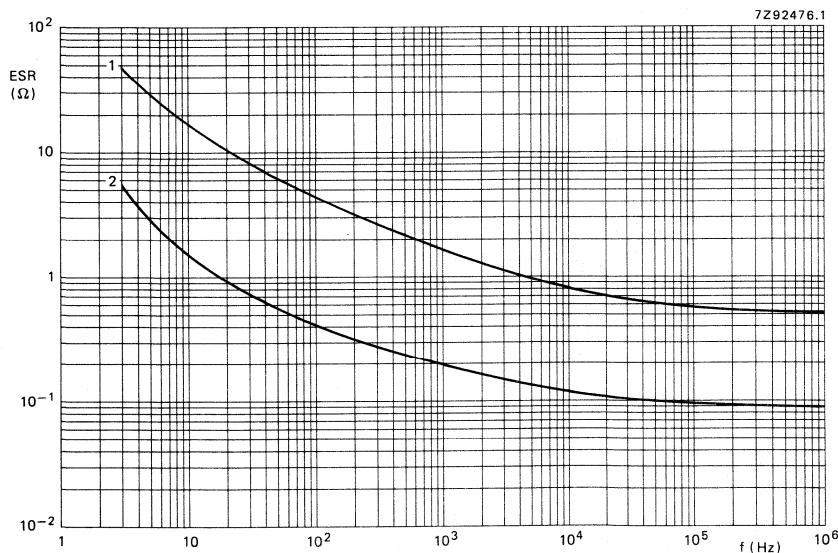


Fig. 15 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 4.

Curve 1 = 33  $\mu\text{F}$ , 35 V and 40 V;

curve 2 = 220  $\mu\text{F}$ , 10 V, 330  $\mu\text{F}$ , 6,3 V and 470  $\mu\text{F}$ , 4 V.

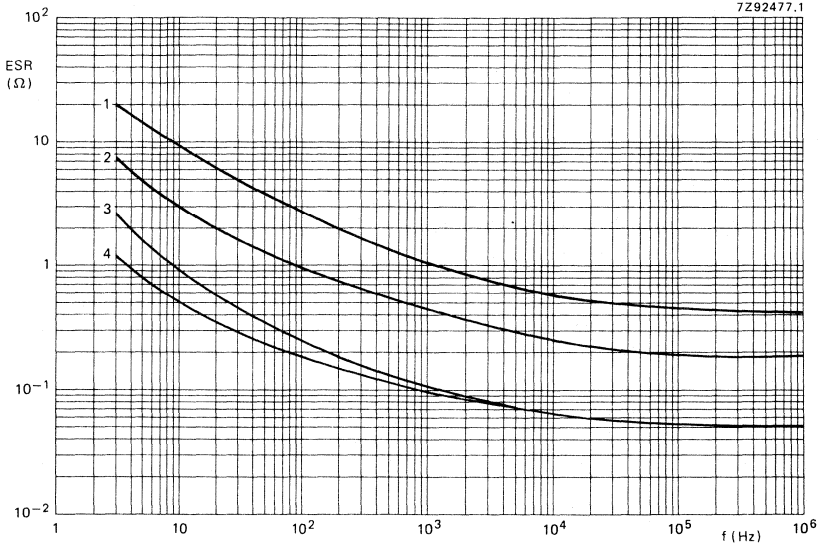


Fig. 16 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 5.

Curve 1 = 68  $\mu\text{F}$ , 35 V and 40 V;  
 curve 2 = 150  $\mu\text{F}$ , 20 V and 25 V;

curve 3 = 330  $\mu\text{F}$ , 10 V;  
 curve 4 = 470  $\mu\text{F}$ , 10 V.

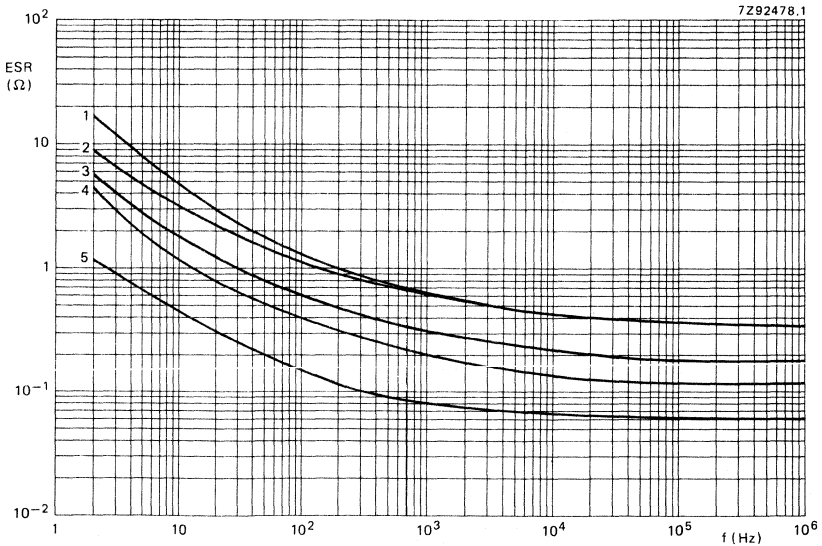


Fig. 17 Typical ESR as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 6.

Curve 1 = 100  $\mu\text{F}$ , 35 V and 40 V;  
 curve 2 = 150  $\mu\text{F}$ , 35 V;  
 curve 3 = 220  $\mu\text{F}$ , 25 V;

curve 4 = 470  $\mu\text{F}$ , 16 V;  
 curve 5 = 1000  $\mu\text{F}$ , 6,3 V and  
 680  $\mu\text{F}$ , 10 V.

**Impedance**

Maximum impedance at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ,  
 measured by means of a four-terminal circuit  
 (Thomson circuit)

see Table 2

Typical impedance at 100 kHz, and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

0,5 x value stated in Table 2

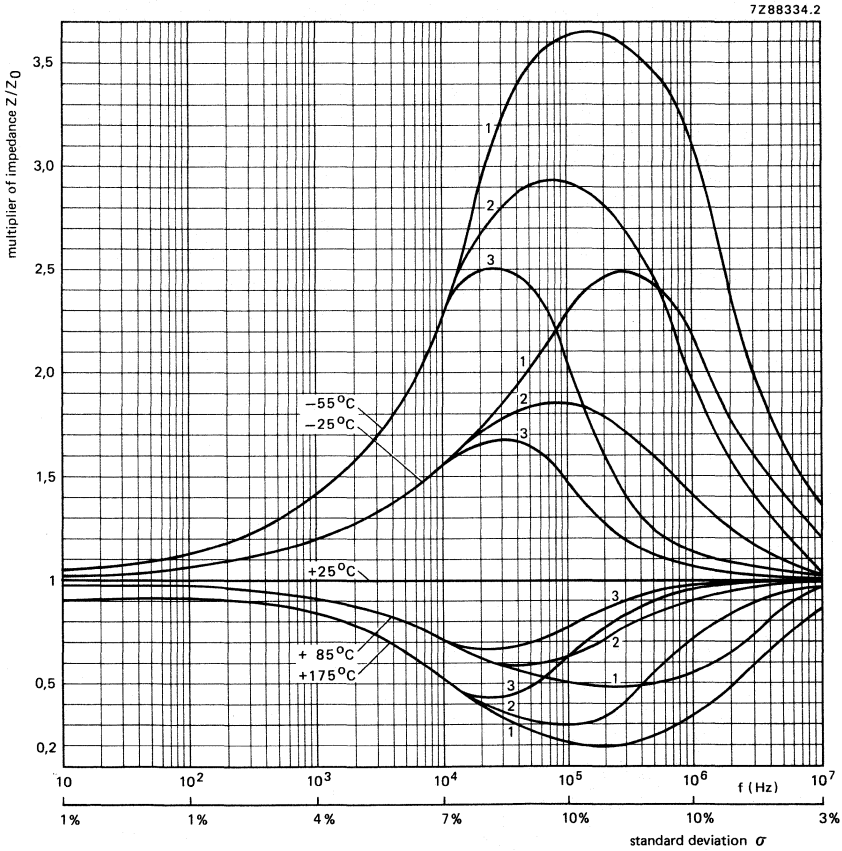


Fig. 18 Typical multiplier of impedance as a function of frequency at different ambient temperatures;  $Z_0$  = initial impedance value at any frequency and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

- Curves 1 = case sizes 1 and 2A, 16 to 40 V;
- curves 2 = case sizes 1 and 2A, 4 to 10 V;
- curves 3 = case sizes 4, 5 and 6.

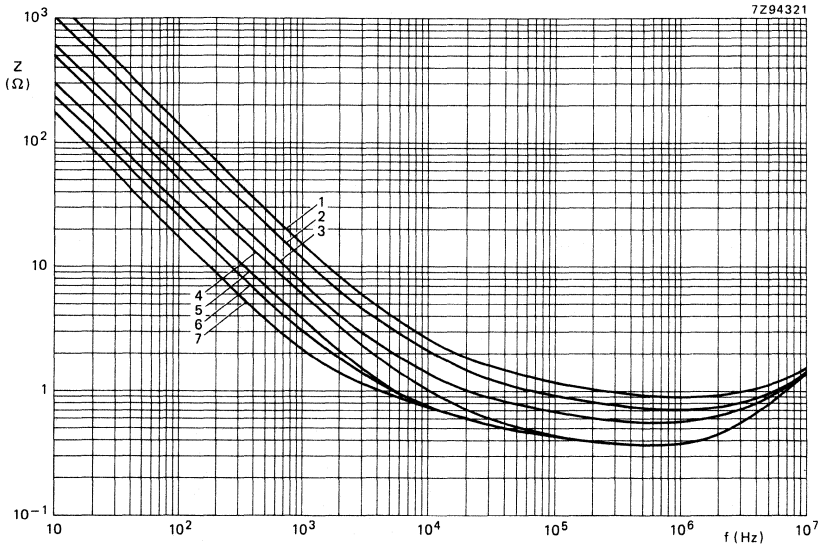


Fig. 19 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 1,  $U_R = 4$  to 16 V.  
 Curve 1 = 10  $\mu\text{F}$ ; 16 V;  
 curve 2 = 15  $\mu\text{F}$ ; 16 V;  
 curve 3 = 22  $\mu\text{F}$ ; 16 V;  
 curve 4 = 33  $\mu\text{F}$ ; 10 V;  
 curve 5 = 47  $\mu\text{F}$ , 6,3 V and 10 V;  
 curve 6 = 68  $\mu\text{F}$ , 4 V and 6,3 V;  
 curve 7 = 100  $\mu\text{F}$ , 4 V.

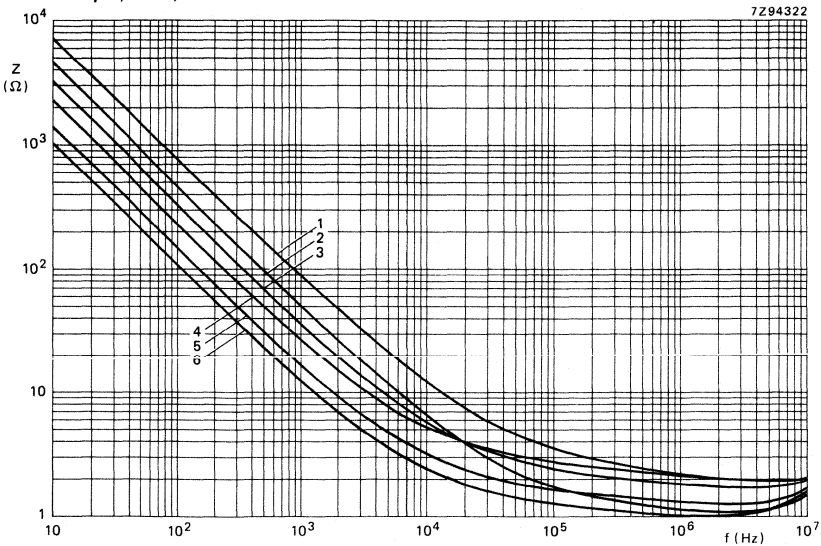


Fig. 20 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 1,  $U_R = 20$  to 40 V.  
 Curve 1 = 2,2  $\mu\text{F}$ , 35 V and 40 V;  
 curve 2 = 3,3  $\mu\text{F}$ , 35 V and 40 V;  
 curve 3 = 4,7  $\mu\text{F}$ , 35 V and 40 V;  
 curve 4 = 6,8  $\mu\text{F}$ , 35 V and 40 V;  
 curve 5 = 10  $\mu\text{F}$ , 20 V and 25 V;  
 curve 6 = 15  $\mu\text{F}$ , 20 V and 25 V.



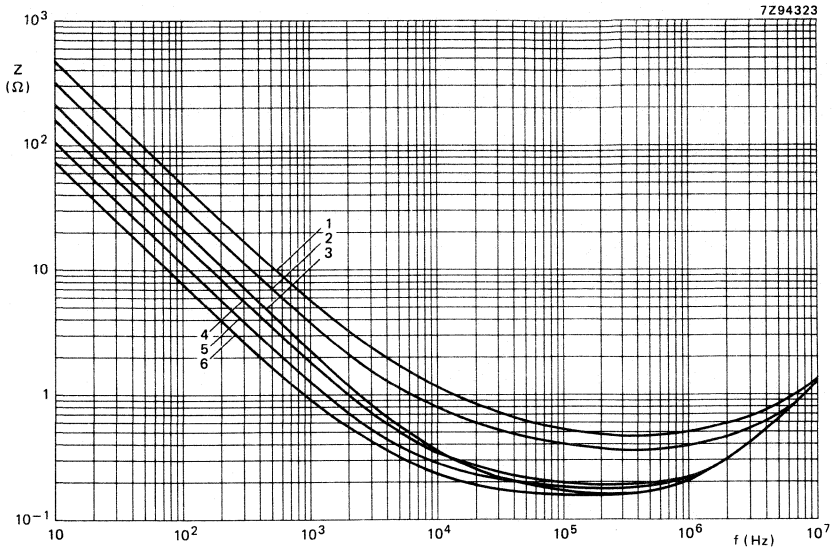


Fig. 21 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 2A,  $U_R = 4$  to 16 V.  
 Curve 1 = 33  $\mu\text{F}$ , 16 V; curve 4 = 100  $\mu\text{F}$ , 10 V;  
 curve 2 = 47  $\mu\text{F}$ , 16 V; curve 5 = 150  $\mu\text{F}$ , 6,3 V;  
 curve 3 = 68  $\mu\text{F}$ , 10 V; curve 6 = 220  $\mu\text{F}$ , 4 V.

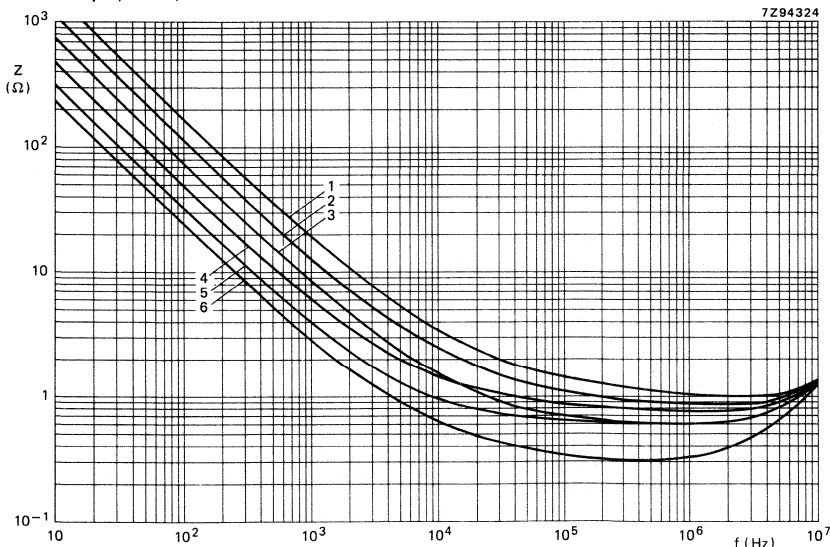


Fig. 22 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 2A,  $U_R = 16$  to 40 V.  
 Curve 1 = 10  $\mu\text{F}$ , 35 V and 40 V; curve 4 = 33  $\mu\text{F}$ , 25 V;  
 curve 2 = 15  $\mu\text{F}$ , 35 V and 40 V; curve 5 = 47  $\mu\text{F}$ , 20 V and 25 V;  
 curve 3 = 22  $\mu\text{F}$ , 25 V and 35 V; curve 6 = 68  $\mu\text{F}$ , 16 V.

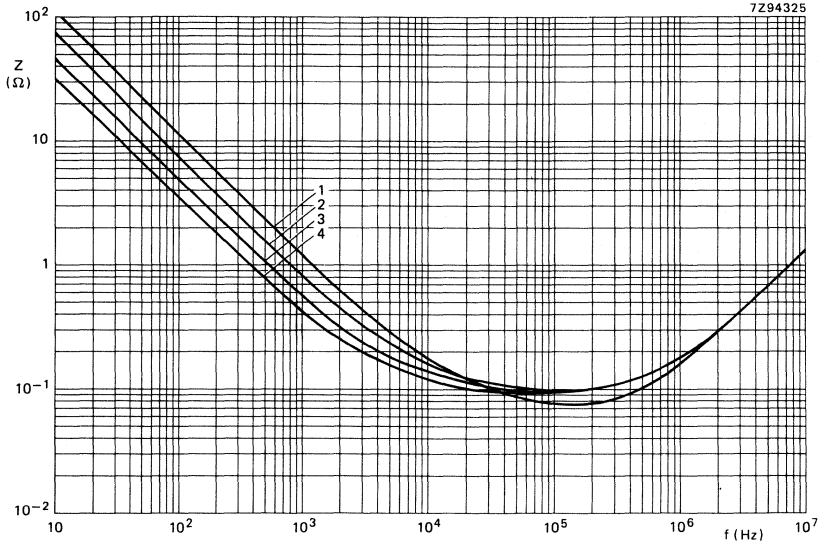


Fig. 23 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 4,  $U_R = 4$  to  $10\text{ V}$ .  
 Curve 1 =  $150\text{ }\mu\text{F}$ ,  $10\text{ V}$ ; curve 3 =  $330\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ ;  
 curve 2 =  $220\text{ }\mu\text{F}$ ,  $10\text{ V}$ ; curve 4 =  $470\text{ }\mu\text{F}$ ,  $4\text{ V}$ .

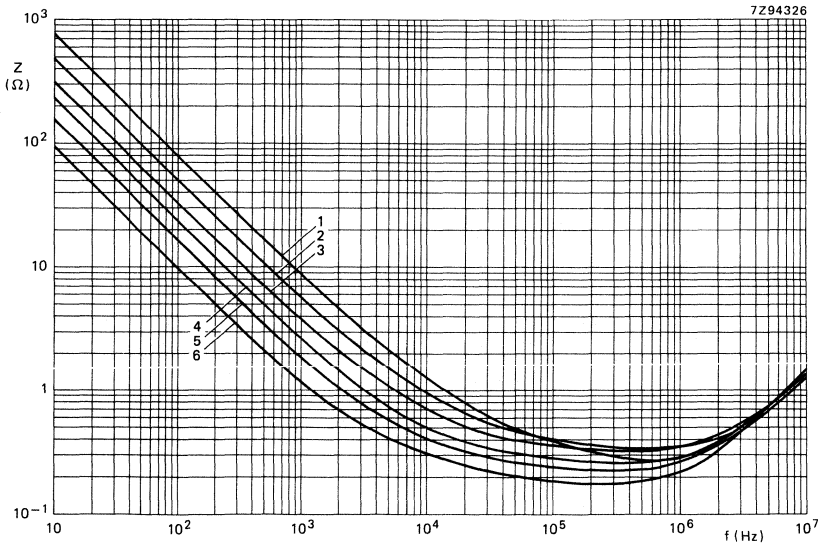


Fig. 24 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 4,  $U_R = 16$  to  $40\text{ V}$ .  
 Curve 1 =  $22\text{ }\mu\text{F}$ ,  $40\text{ V}$ ; curve 4 =  $68\text{ }\mu\text{F}$ ,  $25\text{ V}$ ;  
 curve 2 =  $33\text{ }\mu\text{F}$ ,  $35\text{ V}$  and  $40\text{ V}$ ; curve 5 =  $100\text{ }\mu\text{F}$ ,  $16\text{ V}$ ,  $20\text{ V}$  and  $25\text{ V}$ ;  
 curve 3 =  $47\text{ }\mu\text{F}$ ,  $35\text{ V}$ ; curve 6 =  $150\text{ }\mu\text{F}$ ,  $16\text{ V}$ .

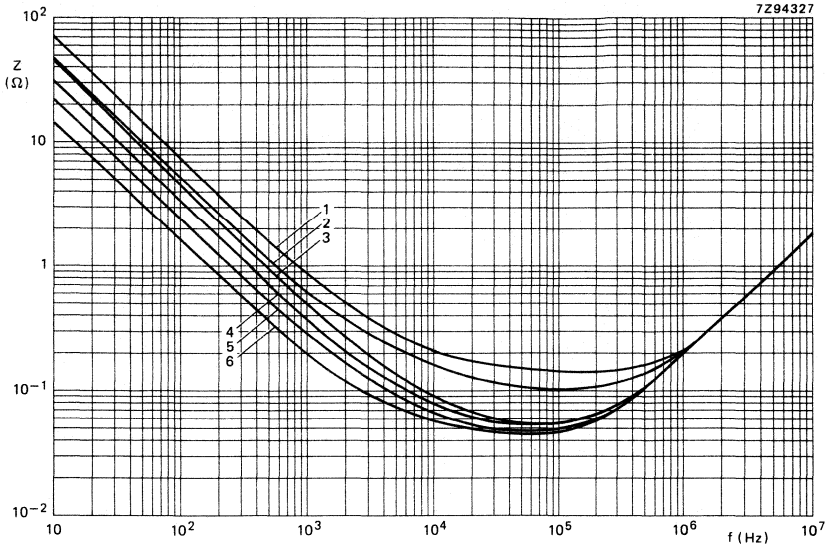


Fig. 25 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 5,  $U_R = 4$  to 16 V.  
 Curve 1 = 220  $\mu\text{F}$ , 16 V; curve 4 = 470  $\mu\text{F}$ , 10 V;  
 curve 2 = 330  $\mu\text{F}$ , 16 V; curve 5 = 680  $\mu\text{F}$ , 6,3 V;  
 curve 3 = 330  $\mu\text{F}$ , 10 V; curve 6 = 1000  $\mu\text{F}$ , 4 V.

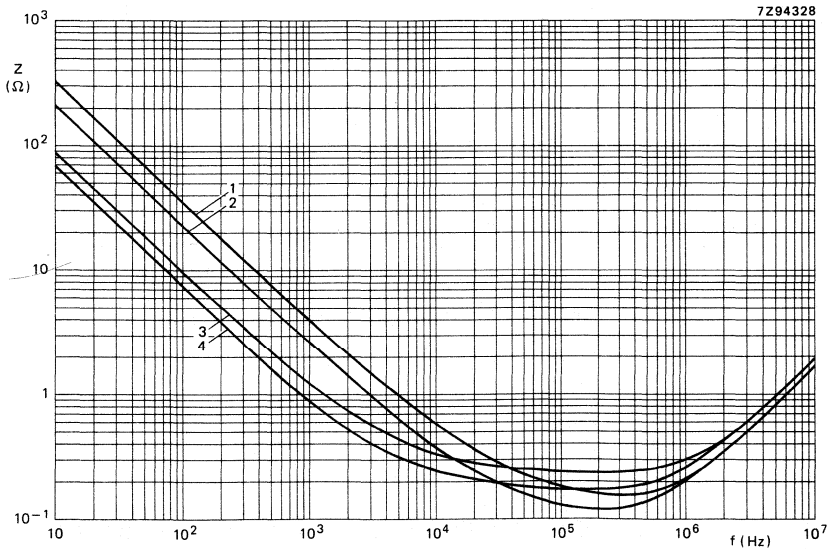


Fig. 26 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 5,  $U_R = 20$  to 40 V.  
 Curve 1 = 47  $\mu\text{F}$ , 40 V; curve 3 = 150  $\mu\text{F}$ , 20 V and 25 V;  
 curve 2 = 68  $\mu\text{F}$ , 35 V and 40 V; curve 4 = 220  $\mu\text{F}$ , 20 V.

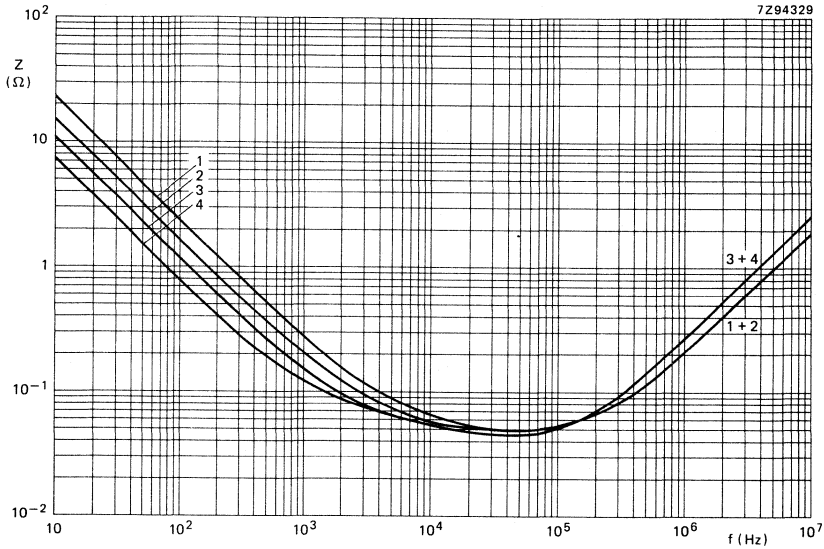


Fig. 27 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 6,  $U_R = 4$  to  $10\text{ V}$ .  
 Curve 1 =  $680\text{ }\mu\text{F}$ ,  $10\text{ V}$ ; curve 3 =  $1500\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ ;  
 curve 2 =  $1000\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ ; curve 4 =  $2200\text{ }\mu\text{F}$ ,  $4\text{ V}$ .

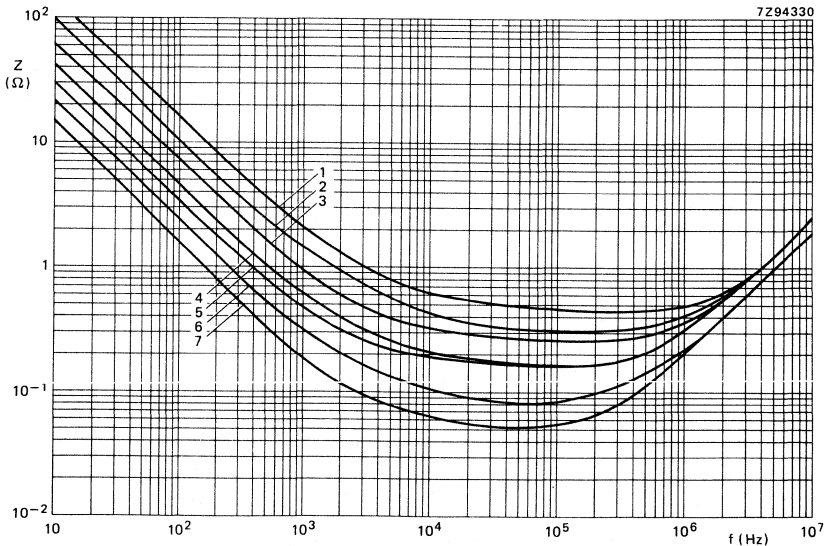


Fig. 28 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 6,  $U_R = 10$  to  $40\text{ V}$ .  
 Curve 1 =  $100\text{ }\mu\text{F}$ ,  $35\text{ V}$  and  $40\text{ V}$ ; curve 5 =  $470\text{ }\mu\text{F}$ ,  $16\text{ V}$  and  $20\text{ V}$ ;  
 curve 2 =  $150\text{ }\mu\text{F}$ ,  $35\text{ V}$ ; curve 6 =  $680\text{ }\mu\text{F}$ ,  $16\text{ V}$ ;  
 curve 3 =  $220\text{ }\mu\text{F}$ ,  $25\text{ V}$ ; curve 7 =  $1000\text{ }\mu\text{F}$ ,  $10\text{ V}$ .  
 curve 4 =  $330\text{ }\mu\text{F}$ ,  $20\text{ V}$ ;

**Equivalent series inductance (ESL)**

Equivalent series inductance, measured by means of a four-terminal circuit (Thomson circuit), at 10 MHz; the capacitor leads bent to the pitch as indicated

|                                 | pitch   | max. ESL | typ. ESL    |
|---------------------------------|---------|----------|-------------|
| case size 1                     | 20,3 mm | 30 nH    | 15 to 23 nH |
| case size 2A                    | 25,4 mm | 30 nH    | 16 to 24 nH |
| case size 4                     | 27,9 mm | 35 nH    | 20 to 27 nH |
| case size 5                     | 35,6 mm | 40 nH    | 26 to 33 nH |
| case size 6, lower capacitance  | 35,6 mm | 55 nH    | 41 to 49 nH |
| case size 6, higher capacitance | 35,6 mm | 50 nH    | 32 to 42 nH |

**OPERATIONAL DATA**

|   |                         |
|---|-------------------------|
| Category temperature range                        | -55 to + 125 °C         |
| Usable temperature range                          | -80 to + 200 °C         |
| Typical life time at $T_{amb} = 125$ °C and $U_R$ | > 20 000 h              |
| Field failure rate                                | < $1 \times 10^{-9}$ /h |

**PACKING**

Capacitors of style 1 are supplied on bandoliers in boxes, those of style 2 are on bandoliers on reels (according to IEC 286-1).

The number of capacitors per box or per reel is shown in Table 4.

**Table 4**

| case size | number of capacitors |                     |
|-----------|----------------------|---------------------|
|           | style 1<br>per box   | style 2<br>per reel |
| 1         | 100                  | 1000                |
| 2A        | 100                  | 1000                |
| 4         | 100                  | 500                 |
| 5         | 100                  | 500                 |
| 6         | 100                  | 400                 |

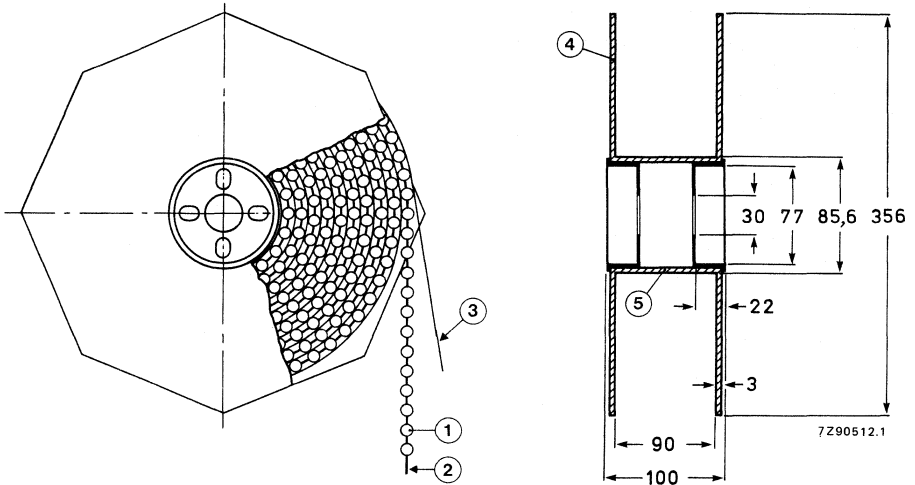


Fig. 29 Style 2 capacitors on bandoliers on reel.

- |               |              |
|---------------|--------------|
| 1 = capacitor | 4 = flange   |
| 2 = bandolier | 5 = cylinder |
| 3 = paper     |              |

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under solid aluminium capacitors, with the addition of the following tests.

*Severe rapid change of temperature test:* 100 cycles of 15 min at -40 °C and + 125 °C.

- Requirements: d.c. leakage current  $\leq$  stated limit,  
 $\tan \delta \leq 1,6 \times$  stated limit,  
 impedance  $\leq 1,6 \times$  stated limit,  
 $\Delta C/C \leq 10\%$ .

*Solvent resistance tests:*

Severity 1, according to MIL-STD-202, method 215, including brushing of all portions of the specimens.

- Solvents: — deionized water (50  $\pm$  5 °C);  
 — 1.1.1. trichloro-ethane;  
 — mixture of 25 vol. % 2-propanol (isopropanol) and 75 vol. % mineral spirits.

Severity 2, according to IEC 68-2-45, and IEC 653, test XA with the following details and additions.

Conditions: immersion time of samples 5 min., at ambient temperature, at boiling temperature, in vapour of boiling solvent, and ultrasonic (40 kHz).

- Solvents:
- deionized water ( $50 \pm 5$  °C);
  - calgonite solution (20 g/l,  $70 \pm 5$  °C), a dishwasher detergent;
  - mixture of 4,5% 2-butoxyethanol, 4,5% 2-amino-ethanol, and 91% water ( $70 \pm 5$  °C);
  - 1.1.1. trichloro-ethane;
  - mixtures of 1.1.2-trichloro-1.2.2-trifluoro-ethane (fluorocarbon 113) and the following solvents in the respective mass percentage ratios of these solvents to fluorocarbon:
    - 2-propanol (isopropanol), 25%: 75% (Arklone K\*); up to the ratio 35%: 65%;
    - ethanol, 4,5%: 95,5% (e.g. Arklome A\*, Freon TE\*\*);
    - methanol and nitromethane, 5,7%: 0,3%: 94% (Freon TMS\*\*).

Requirement: visual appearance not affected.

Note: Tests are carried out using non-contaminated solvents.

*Severe vibration tests (for epoxy-filled version only):* according to IEC 68-2-6 and MIL-STD-202, method 204, letters E and F, with the following details and additions.

- a. Method of mounting: clamping both the body and the leads.
- b. Severity 1: frequency range temperature: 10 – 3000 Hz; 20 – 25 °C;  
 2: frequency range temperature: 50 – 2000 Hz; 125 °C.  
 1 and 2: vibration amplitude: 50g or 3,5 mm, whichever is less.
- c. Direction and duration of motion:  
 severity 1: 1 octave/min, 3 directions (mutually perpendicular), 20 sweeps per direction (total 60 sweeps or 18 h);  
 2: 1 octave/min, 2 directions (longitudinal and transversal), 3 sweeps per direction (total 6 sweeps or 1 h).
- d. Functioning:  
 severity 1: rated voltage applied;  
 2: no voltage applied.
- e. Requirements:  
 $\Delta C/C$ :  $\leq 10\%$   
 $\tan \delta$ :  $\leq 1,2 \times$  stated limit  
 impedance:  $\leq 1,4 \times$  stated limit  
 d.c. leakage current:  $\leq$  stated limit  
 general: no intermittent contacts;  
 no indication of breakdown;  
 no open circuiting;  
 no evidence of mechanical damage.
- f. Typical capability: up to 80g at 10 to 3000 Hz (also at 125 °C).

*Severe shock tests (for epoxy-filled version only):* according to IEC 68-2-27 and MIL-STD-202, method 213, letter F, with the following details and additions.

- a. Method of mounting: clamping both body and the leads.
- b. Pulse shape: half-sine or sawtooth.
- c. Severity 1: 1500g, 0,5 ms (MIL-STD-202, method 213, letter F);  
 2: 3000g, 0,2 ms;  
 3: 10 000g, 0,1 ms.
- d. Direction and number of shocks:  
 severity 1 and 2: 3 successive shocks in each direction of 3 mutually perpendicular axes (total 18 shocks);  
 3: 1 shock, any direction.
- e. Functioning: rated voltage applied.
- f. Requirements: see "Severe vibration tests" par. e.
- g. Typical capability:  $\geq 100000g$ ; these shock tests can be preceded by severe vibration tests on the same samples.

→ **Survey of maximum permissible ripple voltage and ripple current values at various ambient temperatures and frequencies**

**Notes**

- Zero d.c. voltage is assumed; at non-zero d.c. voltage the values in the tables can be adapted according to paragraphs "Ripple voltage" and "Ripple current".
- If the limiting current value given in the tables is applied, the voltage limit mentioned in "Ripple voltage, b", is not exceeded; if the limiting voltage value given in the tables is applied, the current limit calculated as in "Calculation of ripple currents" is not exceeded.
- 1E + 04 to be read as 10<sup>4</sup> Hz;  
1E + 05 to be read as 10<sup>5</sup> Hz;  
1E + 06 to be read as 10<sup>6</sup> Hz.

**68 μF – 4 V – case size 1**

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 1.80       | 0          | 1.80       | 0          | 1.80       | 0          | 1.80       | 0          | 1.50       | 0          | 1.30       |
| 10         | 6          | 2.40       | 6          | 2.40       | 6          | 2.40       | 6          | 2.40       | 5          | 2.00       | 4          | 1.70       |
| 50         | 32         | 2.60       | 32         | 2.60       | 32         | 2.60       | 32         | 2.60       | 27         | 2.20       | 22         | 1.80       |
| 100        | 75         | 3.20       | 75         | 3.20       | 75         | 3.20       | 75         | 3.20       | 63         | 2.70       | 53         | 2.20       |
| 300        | 230        | 3.20       | 230        | 3.20       | 210        | 3.00       | 180        | 2.60       | 150        | 2.10       | 130        | 1.50       |
| 600        | 330        | 2.20       | 270        | 2.00       | 250        | 1.80       | 250        | 1.50       | 250        | 1.30       | 190        | 0.89       |
| 1000       | 360        | 1.70       | 360        | 1.50       | 360        | 1.40       | 360        | 1.20       | 290        | 0.97       | 210        | 0.68       |
| 1500       | 520        | 1.20       | 470        | 1.10       | 420        | 0.96       | 370        | 0.83       | 300        | 0.68       | 210        | 0.48       |
| 1E+04      | 630        | 0.28       | 580        | 0.26       | 520        | 0.23       | 450        | 0.20       | 370        | 0.16       | 260        | 0.12       |
| 1E+05      | 710        | 0.12       | 650        | 0.11       | 580        | 0.10       | 500        | 0.09       | 410        | 0.07       | 290        | 0.05       |
| 1E+06      | 760        | 0.13       | 700        | 0.12       | 620        | 0.11       | 540        | 0.09       | 440        | 0.08       | 310        | 0.05       |

**100 μF – 4 V – case size 1**

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 1.80       | 1          | 1.80       | 1          | 1.80       | 1          | 1.80       | 1          | 1.50       | 0          | 1.30       |
| 10         | 9          | 2.40       | 9          | 2.40       | 9          | 2.40       | 9          | 2.40       | 7          | 2.00       | 6          | 1.70       |
| 50         | 47         | 2.60       | 47         | 2.60       | 47         | 2.60       | 47         | 2.60       | 40         | 2.20       | 33         | 1.80       |
| 100        | 110        | 3.20       | 110        | 3.20       | 110        | 3.20       | 110        | 3.20       | 93         | 2.70       | 77         | 2.20       |
| 300        | 330        | 3.00       | 300        | 2.80       | 260        | 2.50       | 220        | 2.10       | 190        | 1.70       | 190        | 1.20       |
| 600        | 370        | 1.80       | 370        | 1.60       | 370        | 1.50       | 370        | 1.30       | 320        | 1.00       | 230        | 0.73       |
| 1000       | 530        | 1.40       | 530        | 1.30       | 500        | 1.10       | 430        | 0.97       | 350        | 0.79       | 250        | 0.56       |
| 1500       | 630        | 0.97       | 570        | 0.89       | 510        | 0.79       | 440        | 0.69       | 360        | 0.56       | 260        | 0.40       |
| 1E+04      | 760        | 0.23       | 700        | 0.21       | 620        | 0.19       | 540        | 0.16       | 440        | 0.13       | 310        | 0.10       |
| 1E+05      | 860        | 0.15       | 790        | 0.13       | 700        | 0.12       | 610        | 0.10       | 500        | 0.08       | 350        | 0.06       |
| 1E+06      | 920        | 0.16       | 840        | 0.14       | 750        | 0.13       | 650        | 0.11       | 530        | 0.09       | 380        | 0.06       |



220  $\mu\text{F}$  - 4 V - case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 1.80       | 1          | 1.80       | 1          | 1.80       | 1          | 1.80       | 1          | 1.50       | 1          | 1.30       |
| 10         | 19         | 2.40       | 19         | 2.40       | 19         | 2.40       | 19         | 2.40       | 16         | 2.00       | 13         | 1.70       |
| 50         | 100        | 2.60       | 100        | 2.60       | 100        | 2.60       | 100        | 2.60       | 88         | 2.20       | 73         | 1.80       |
| 100        | 240        | 3.20       | 240        | 3.20       | 240        | 3.20       | 240        | 3.20       | 200        | 2.70       | 160        | 2.20       |
| 300        | 580        | 2.30       | 480        | 2.10       | 420        | 1.80       | 420        | 1.60       | 420        | 1.30       | 330        | 0.93       |
| 600        | 820        | 1.30       | 820        | 1.20       | 750        | 1.10       | 650        | 0.95       | 530        | 0.77       | 370        | 0.55       |
| 1000       | 1000       | 1.00       | 910        | 0.94       | 820        | 0.84       | 710        | 0.73       | 580        | 0.60       | 410        | 0.42       |
| 1500       | 1030       | 0.73       | 940        | 0.66       | 840        | 0.59       | 730        | 0.51       | 600        | 0.42       | 420        | 0.30       |
| 1E+04      | 1260       | 0.17       | 1150       | 0.16       | 1030       | 0.14       | 890        | 0.12       | 730        | 0.10       | 510        | 0.07       |
| 1E+05      | 1420       | 0.14       | 1300       | 0.13       | 1160       | 0.11       | 1010       | 0.10       | 820        | 0.08       | 580        | 0.06       |
| 1E+06      | 1520       | 0.16       | 1390       | 0.14       | 1240       | 0.13       | 1070       | 0.11       | 880        | 0.09       | 620        | 0.06       |

470  $\mu\text{F}$  - 4 V - case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 3          | 1.80       | 3          | 1.80       | 3          | 1.80       | 3          | 1.80       | 3          | 1.50       | 2          | 1.30       |
| 10         | 40         | 2.40       | 40         | 2.40       | 40         | 2.40       | 40         | 2.40       | 34         | 2.00       | 28         | 1.70       |
| 50         | 220        | 2.60       | 220        | 2.60       | 220        | 2.60       | 220        | 2.60       | 190        | 2.20       | 150        | 1.80       |
| 100        | 520        | 3.20       | 520        | 3.20       | 520        | 3.20       | 480        | 3.00       | 390        | 2.40       | 300        | 1.70       |
| 300        | 900        | 1.80       | 900        | 1.60       | 900        | 1.40       | 900        | 1.20       | 760        | 1.00       | 540        | 0.72       |
| 600        | 1510       | 1.00       | 1380       | 0.94       | 1230       | 0.84       | 1070       | 0.73       | 870        | 0.60       | 620        | 0.42       |
| 1000       | 1650       | 0.80       | 1510       | 0.73       | 1350       | 0.65       | 1170       | 0.56       | 950        | 0.46       | 670        | 0.33       |
| 1500       | 1700       | 0.56       | 1560       | 0.51       | 1390       | 0.46       | 1210       | 0.40       | 980        | 0.32       | 700        | 0.23       |
| 1E+04      | 2080       | 0.13       | 1900       | 0.12       | 1700       | 0.11       | 1470       | 0.10       | 1200       | 0.08       | 850        | 0.06       |
| 1E+05      | 2340       | 0.10       | 2140       | 0.09       | 1910       | 0.08       | 1660       | 0.07       | 1350       | 0.06       | 960        | 0.04       |
| 1E+06      | 2500       | 0.13       | 2290       | 0.12       | 2040       | 0.11       | 1770       | 0.09       | 1450       | 0.08       | 1020       | 0.05       |

1000  $\mu\text{F}$  - 4 V - case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 6          | 1.80       | 6          | 1.80       | 6          | 1.80       | 6          | 1.80       | 5          | 1.50       | 4          | 1.30       |
| 10         | 85         | 2.40       | 85         | 2.40       | 85         | 2.40       | 85         | 2.40       | 72         | 2.00       | 60         | 1.70       |
| 50         | 470        | 2.60       | 470        | 2.60       | 470        | 2.60       | 470        | 2.60       | 400        | 2.20       | 330        | 1.80       |
| 100        | 1100       | 3.20       | 1060       | 3.10       | 940        | 2.70       | 820        | 2.40       | 670        | 1.90       | 630        | 1.40       |
| 300        | 1910       | 1.40       | 1910       | 1.30       | 1800       | 1.10       | 1560       | 0.97       | 1270       | 0.79       | 900        | 0.56       |
| 600        | 2530       | 0.81       | 2310       | 0.74       | 2060       | 0.66       | 1790       | 0.57       | 1460       | 0.47       | 1030       | 0.33       |
| 1000       | 2760       | 0.62       | 2520       | 0.57       | 2250       | 0.51       | 1950       | 0.44       | 1590       | 0.36       | 1130       | 0.25       |
| 1500       | 2850       | 0.44       | 2600       | 0.40       | 2330       | 0.36       | 2010       | 0.31       | 1640       | 0.25       | 1160       | 0.18       |
| 1E+04      | 3470       | 0.11       | 3170       | 0.10       | 2830       | 0.09       | 2450       | 0.07       | 2000       | 0.06       | 1420       | 0.04       |
| 1E+05      | 3920       | 0.11       | 3570       | 0.10       | 3200       | 0.09       | 2770       | 0.08       | 2260       | 0.06       | 1600       | 0.05       |
| 1E+06      | 4030       | 0.19       | 3820       | 0.17       | 3420       | 0.16       | 2960       | 0.13       | 2410       | 0.11       | 1710       | 0.08       |

1500  $\mu$ F – 4 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 10         | 1.80       | 10         | 1.80       | 10         | 1.80       | 10         | 1.80       | 8          | 1.50       | 7          | 1.30       |
| 10         | 130        | 2.40       | 130        | 2.40       | 130        | 2.40       | 130        | 2.40       | 110        | 2.00       | 90         | 1.70       |
| 50         | 710        | 2.60       | 710        | 2.60       | 710        | 2.60       | 710        | 2.60       | 590        | 2.20       | 480        | 1.80       |
| 100        | 1460       | 3.00       | 1490       | 2.80       | 1280       | 2.50       | 1100       | 2.10       | 950        | 1.70       | 950        | 1.20       |
| 300        | 2870       | 1.20       | 2730       | 1.10       | 2440       | 1.00       | 2110       | 0.88       | 1730       | 0.72       | 1220       | 0.51       |
| 600        | 3430       | 0.73       | 3130       | 0.67       | 2800       | 0.60       | 2420       | 0.52       | 1980       | 0.42       | 1400       | 0.30       |
| 1000       | 3740       | 0.66       | 3410       | 0.60       | 3050       | 0.54       | 2640       | 0.47       | 2160       | 0.38       | 1530       | 0.27       |
| 1500       | 3860       | 0.53       | 3520       | 0.49       | 3150       | 0.44       | 2730       | 0.38       | 2230       | 0.31       | 1580       | 0.22       |
| 1E+04      | 4700       | 0.14       | 4290       | 0.12       | 3840       | 0.11       | 3330       | 0.10       | 2720       | 0.08       | 1920       | 0.06       |
| 1E+05      | 5310       | 0.15       | 4840       | 0.14       | 4330       | 0.12       | 3750       | 0.11       | 3060       | 0.09       | 2170       | 0.06       |
| 1E+06      | 3240       | 0.32       | 3240       | 0.29       | 3240       | 0.26       | 3240       | 0.23       | 3240       | 0.18       | 2310       | 0.13       |

2200  $\mu$ F – 4 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 14         | 1.80       | 14         | 1.80       | 14         | 1.80       | 14         | 1.80       | 12         | 1.50       | 10         | 1.30       |
| 10         | 190        | 2.40       | 190        | 2.40       | 190        | 2.40       | 190        | 2.40       | 160        | 2.00       | 130        | 1.70       |
| 50         | 1040       | 2.60       | 1040       | 2.60       | 1040       | 2.60       | 1030       | 2.60       | 850        | 2.10       | 640        | 1.60       |
| 100        | 2290       | 2.60       | 1920       | 2.40       | 1620       | 2.10       | 1410       | 1.90       | 1390       | 1.50       | 1250       | 1.10       |
| 300        | 3800       | 1.10       | 3470       | 0.98       | 3100       | 0.88       | 2690       | 0.76       | 2190       | 0.62       | 1550       | 0.44       |
| 600        | 4350       | 0.63       | 3970       | 0.58       | 3550       | 0.52       | 3080       | 0.45       | 2510       | 0.37       | 1780       | 0.26       |
| 1000       | 4750       | 0.57       | 4340       | 0.52       | 3880       | 0.47       | 3360       | 0.40       | 2740       | 0.33       | 1940       | 0.23       |
| 1500       | 4900       | 0.46       | 4480       | 0.42       | 4000       | 0.38       | 3470       | 0.33       | 2830       | 0.27       | 2000       | 0.19       |
| 1E+04      | 5980       | 0.12       | 5460       | 0.11       | 4880       | 0.10       | 4230       | 0.08       | 3450       | 0.07       | 2440       | 0.05       |
| 1E+05      | 6470       | 0.19       | 6150       | 0.17       | 5500       | 0.16       | 4770       | 0.13       | 3890       | 0.11       | 2750       | 0.08       |
| 1E+06      | 3470       | 0.38       | 3470       | 0.35       | 3470       | 0.31       | 3470       | 0.27       | 3470       | 0.22       | 2940       | 0.15       |

47  $\mu$ F – 6,3 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 2.80       | 1          | 2.80       | 1          | 2.80       | 1          | 2.80       | 0          | 2.40       | 0          | 2.00       |
| 10         | 6          | 3.80       | 6          | 3.80       | 6          | 3.80       | 6          | 3.80       | 5          | 3.20       | 4          | 2.60       |
| 50         | 35         | 4.10       | 35         | 4.10       | 35         | 4.10       | 35         | 4.10       | 30         | 3.50       | 25         | 2.90       |
| 100        | 83         | 5.00       | 83         | 5.00       | 83         | 5.00       | 83         | 5.00       | 70         | 4.30       | 58         | 3.50       |
| 300        | 250        | 5.00       | 240        | 4.70       | 210        | 4.20       | 180        | 3.60       | 150        | 3.00       | 140        | 2.10       |
| 600        | 300        | 3.00       | 280        | 2.80       | 280        | 2.50       | 280        | 2.10       | 260        | 1.80       | 180        | 1.20       |
| 1000       | 390        | 2.30       | 390        | 2.10       | 390        | 1.90       | 350        | 1.70       | 280        | 1.30       | 200        | 0.95       |
| 1500       | 510        | 1.60       | 460        | 1.50       | 420        | 1.30       | 360        | 1.20       | 290        | 0.95       | 210        | 0.67       |
| 1E+04      | 620        | 0.40       | 570        | 0.36       | 510        | 0.32       | 440        | 0.28       | 360        | 0.23       | 250        | 0.16       |
| 1E+05      | 700        | 0.12       | 640        | 0.11       | 570        | 0.10       | 490        | 0.08       | 400        | 0.07       | 290        | 0.05       |
| 1E+06      | 750        | 0.13       | 680        | 0.12       | 610        | 0.10       | 530        | 0.09       | 430        | 0.07       | 300        | 0.05       |

68  $\mu\text{F}$  — 6,3 V — case size 1

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 1                      | 2.80                   | 1                      | 2.80                   | 1                      | 2.80                   | 1                      | 2.80                   | 1                      | 2.40                   | 1                      | 2.00                   |
| 10         | 9                      | 3.80                   | 9                      | 3.80                   | 9                      | 3.80                   | 9                      | 3.80                   | 8                      | 3.20                   | 6                      | 2.60                   |
| 50         | 51                     | 4.10                   | 51                     | 4.10                   | 51                     | 4.10                   | 51                     | 4.10                   | 43                     | 3.50                   | 36                     | 2.90                   |
| 100        | 120                    | 5.00                   | 120                    | 5.00                   | 120                    | 5.00                   | 120                    | 5.00                   | 100                    | 4.30                   | 83                     | 3.50                   |
| 300        | 350                    | 4.30                   | 290                    | 3.90                   | 250                    | 3.50                   | 220                    | 3.00                   | 210                    | 2.50                   | 190                    | 1.70                   |
| 600        | 400                    | 2.50                   | 400                    | 2.30                   | 400                    | 2.10                   | 380                    | 1.80                   | 310                    | 1.50                   | 220                    | 1.00                   |
| 1000       | 570                    | 1.90                   | 540                    | 1.80                   | 480                    | 1.60                   | 420                    | 1.40                   | 340                    | 1.10                   | 240                    | 0.79                   |
| 1500       | 610                    | 1.40                   | 560                    | 1.20                   | 500                    | 1.10                   | 430                    | 0.97                   | 350                    | 0.79                   | 250                    | 0.56                   |
| 1E+04      | 740                    | 0.33                   | 680                    | 0.30                   | 610                    | 0.27                   | 520                    | 0.23                   | 430                    | 0.19                   | 300                    | 0.13                   |
| 1E+05      | 840                    | 0.14                   | 760                    | 0.13                   | 680                    | 0.12                   | 590                    | 0.10                   | 480                    | 0.08                   | 340                    | 0.06                   |
| 1E+06      | 890                    | 0.15                   | 820                    | 0.14                   | 730                    | 0.13                   | 630                    | 0.11                   | 520                    | 0.09                   | 370                    | 0.06                   |

150  $\mu\text{F}$  — 6,3 V — case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 2.80                   | 2                      | 2.80                   | 2                      | 2.80                   | 2                      | 2.80                   | 1                      | 2.40                   | 1                      | 2.00                   |
| 10         | 20                     | 3.80                   | 20                     | 3.80                   | 20                     | 3.80                   | 20                     | 3.80                   | 17                     | 3.20                   | 14                     | 2.60                   |
| 50         | 110                    | 4.10                   | 110                    | 4.10                   | 110                    | 4.10                   | 110                    | 4.10                   | 96                     | 3.50                   | 79                     | 2.90                   |
| 100        | 260                    | 5.00                   | 260                    | 5.00                   | 260                    | 5.00                   | 260                    | 5.00                   | 220                    | 4.20                   | 160                    | 3.10                   |
| 300        | 530                    | 3.20                   | 470                    | 2.90                   | 460                    | 2.60                   | 460                    | 2.30                   | 450                    | 1.90                   | 320                    | 1.30                   |
| 600        | 890                    | 1.90                   | 820                    | 1.70                   | 730                    | 1.50                   | 640                    | 1.30                   | 520                    | 1.10                   | 370                    | 0.77                   |
| 1000       | 980                    | 1.50                   | 890                    | 1.30                   | 800                    | 1.20                   | 690                    | 1.00                   | 570                    | 0.84                   | 400                    | 0.60                   |
| 1500       | 1010                   | 1.00                   | 920                    | 0.94                   | 830                    | 0.84                   | 720                    | 0.73                   | 580                    | 0.59                   | 410                    | 0.42                   |
| 1E+04      | 1230                   | 0.25                   | 1130                   | 0.23                   | 1010                   | 0.20                   | 870                    | 0.17                   | 710                    | 0.14                   | 500                    | 0.10                   |
| 1E+05      | 1390                   | 0.14                   | 1270                   | 0.13                   | 1140                   | 0.11                   | 980                    | 0.10                   | 800                    | 0.08                   | 570                    | 0.06                   |
| 1E+06      | 1490                   | 0.15                   | 1360                   | 0.14                   | 1210                   | 0.12                   | 1050                   | 0.11                   | 860                    | 0.09                   | 610                    | 0.06                   |

330  $\mu\text{F}$  — 6,3 V — case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 3                      | 2.80                   | 3                      | 2.80                   | 3                      | 2.80                   | 3                      | 2.80                   | 3                      | 2.40                   | 2                      | 2.00                   |
| 10         | 45                     | 3.80                   | 45                     | 3.80                   | 45                     | 3.80                   | 45                     | 3.80                   | 38                     | 3.20                   | 31                     | 2.60                   |
| 50         | 250                    | 4.10                   | 250                    | 4.10                   | 250                    | 4.10                   | 250                    | 4.10                   | 210                    | 3.50                   | 170                    | 2.90                   |
| 100        | 580                    | 5.00                   | 580                    | 5.00                   | 560                    | 4.90                   | 490                    | 4.20                   | 400                    | 3.40                   | 330                    | 2.40                   |
| 300        | 1010                   | 2.50                   | 1010                   | 2.20                   | 1010                   | 2.00                   | 930                    | 1.70                   | 760                    | 1.40                   | 540                    | 1.00                   |
| 600        | 1510                   | 1.40                   | 1380                   | 1.30                   | 1230                   | 1.20                   | 1070                   | 1.00                   | 870                    | 0.84                   | 620                    | 0.59                   |
| 1000       | 1650                   | 1.10                   | 1510                   | 1.00                   | 1350                   | 0.91                   | 1170                   | 0.79                   | 950                    | 0.64                   | 670                    | 0.46                   |
| 1500       | 1700                   | 0.79                   | 1560                   | 0.72                   | 1390                   | 0.64                   | 1210                   | 0.56                   | 980                    | 0.45                   | 700                    | 0.32                   |
| 1E+04      | 2080                   | 0.19                   | 1900                   | 0.17                   | 1700                   | 0.15                   | 1470                   | 0.13                   | 1200                   | 0.11                   | 850                    | 0.08                   |
| 1E+05      | 2340                   | 0.10                   | 2140                   | 0.09                   | 1910                   | 0.08                   | 1660                   | 0.07                   | 1350                   | 0.06                   | 960                    | 0.04                   |
| 1E+06      | 2500                   | 0.13                   | 2290                   | 0.12                   | 2040                   | 0.11                   | 1770                   | 0.09                   | 1450                   | 0.08                   | 1020                   | 0.05                   |

680  $\mu$ F – 6,3 V – case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 7          | 2.80       | 7          | 2.80       | 7          | 2.80       | 7          | 2.80       | 6          | 2.40       | 5          | 2.00       |
| 10         | 93         | 3.80       | 93         | 3.80       | 93         | 3.80       | 93         | 3.80       | 78         | 3.20       | 65         | 2.60       |
| 50         | 510        | 4.10       | 510        | 4.10       | 510        | 4.10       | 510        | 4.10       | 430        | 3.40       | 340        | 2.70       |
| 100        | 1200       | 4.60       | 1050       | 4.20       | 900        | 3.80       | 780        | 3.30       | 680        | 2.70       | 680        | 1.90       |
| 300        | 2070       | 1.90       | 1920       | 1.70       | 1720       | 1.60       | 1490       | 1.30       | 1210       | 1.10       | 860        | 0.78       |
| 600        | 2410       | 1.10       | 2200       | 1.00       | 1970       | 0.92       | 1700       | 0.79       | 1390       | 0.65       | 980        | 0.46       |
| 1000       | 2630       | 0.86       | 2400       | 0.79       | 2150       | 0.71       | 1860       | 0.61       | 1520       | 0.50       | 1070       | 0.35       |
| 1500       | 2720       | 0.61       | 2480       | 0.56       | 2220       | 0.50       | 1920       | 0.43       | 1570       | 0.35       | 1110       | 0.25       |
| 1E+04      | 3310       | 0.15       | 3020       | 0.13       | 2700       | 0.12       | 2340       | 0.10       | 1910       | 0.08       | 1350       | 0.06       |
| 1E+05      | 3730       | 0.11       | 3410       | 0.10       | 3050       | 0.09       | 2640       | 0.07       | 2160       | 0.06       | 1520       | 0.04       |
| 1E+06      | 3990       | 0.18       | 3640       | 0.17       | 3260       | 0.15       | 2820       | 0.13       | 2300       | 0.10       | 1630       | 0.07       |

1000  $\mu$ F – 6,3 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 10         | 2.80       | 10         | 2.80       | 10         | 2.80       | 10         | 2.80       | 9          | 2.40       | 7          | 2.00       |
| 10         | 140        | 3.80       | 140        | 3.80       | 140        | 3.80       | 140        | 3.80       | 120        | 3.20       | 95         | 2.60       |
| 50         | 750        | 4.10       | 750        | 4.10       | 750        | 4.10       | 750        | 4.10       | 630        | 3.40       | 480        | 2.60       |
| 100        | 1730       | 4.30       | 1440       | 3.90       | 1220       | 3.50       | 1060       | 3.00       | 1010       | 2.50       | 940        | 1.80       |
| 300        | 2860       | 1.80       | 2610       | 1.60       | 2340       | 1.40       | 2020       | 1.20       | 1650       | 1.00       | 1170       | 0.72       |
| 600        | 3280       | 1.00       | 2990       | 0.95       | 2680       | 0.85       | 2320       | 0.73       | 1890       | 0.60       | 1340       | 0.42       |
| 1000       | 3580       | 0.93       | 3270       | 0.85       | 2920       | 0.76       | 2530       | 0.66       | 2070       | 0.54       | 1460       | 0.38       |
| 1500       | 3700       | 0.76       | 3370       | 0.69       | 3020       | 0.62       | 2610       | 0.53       | 2130       | 0.44       | 1510       | 0.31       |
| 1E+04      | 4500       | 0.19       | 4110       | 0.18       | 3680       | 0.16       | 3180       | 0.14       | 2600       | 0.11       | 1840       | 0.08       |
| 1E+05      | 5080       | 0.14       | 4640       | 0.13       | 4150       | 0.12       | 3590       | 0.10       | 2930       | 0.08       | 2070       | 0.06       |
| 1E+06      | 5100       | 0.31       | 4950       | 0.28       | 4430       | 0.25       | 3840       | 0.22       | 3130       | 0.18       | 2220       | 0.13       |

1500  $\mu$ F – 6,3 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 15         | 2.80       | 15         | 2.80       | 15         | 2.80       | 15         | 2.80       | 13         | 2.40       | 11         | 2.00       |
| 10         | 200        | 3.80       | 200        | 3.80       | 200        | 3.80       | 200        | 3.80       | 170        | 3.20       | 140        | 2.60       |
| 50         | 1130       | 4.10       | 1130       | 4.10       | 1130       | 4.10       | 1070       | 3.90       | 880        | 3.20       | 650        | 2.30       |
| 100        | 2210       | 3.70       | 1820       | 3.40       | 1590       | 3.00       | 1510       | 2.60       | 1510       | 2.10       | 1220       | 1.50       |
| 300        | 3720       | 1.50       | 3400       | 1.40       | 3040       | 1.20       | 2630       | 1.10       | 2150       | 0.88       | 1520       | 0.62       |
| 600        | 4260       | 0.90       | 3890       | 0.82       | 3480       | 0.73       | 3010       | 0.63       | 2460       | 0.52       | 1740       | 0.37       |
| 1000       | 4650       | 0.81       | 4240       | 0.74       | 3800       | 0.66       | 3290       | 0.57       | 2680       | 0.47       | 1900       | 0.33       |
| 1500       | 4800       | 0.65       | 4380       | 0.60       | 3920       | 0.53       | 3390       | 0.46       | 2770       | 0.38       | 1960       | 0.27       |
| 1E+04      | 5850       | 0.17       | 5340       | 0.15       | 4780       | 0.14       | 4140       | 0.12       | 3380       | 0.10       | 2390       | 0.07       |
| 1E+05      | 6600       | 0.19       | 6020       | 0.17       | 5390       | 0.15       | 4670       | 0.13       | 3810       | 0.11       | 2690       | 0.08       |
| 1E+06      | 5470       | 0.37       | 5470       | 0.34       | 5470       | 0.30       | 4990       | 0.26       | 4070       | 0.21       | 2880       | 0.15       |

33  $\mu$ F – 10 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 3.80       | 0          | 3.20       |
| 10         | 7          | 6.00       | 7          | 6.00       | 7          | 6.00       | 7          | 6.00       | 6          | 5.10       | 5          | 4.20       |
| 50         | 39         | 6.50       | 39         | 6.50       | 39         | 6.50       | 39         | 6.50       | 33         | 5.50       | 28         | 4.60       |
| 100        | 92         | 8.00       | 92         | 8.00       | 92         | 8.00       | 92         | 8.00       | 78         | 6.70       | 63         | 5.50       |
| 300        | 240        | 6.10       | 200        | 5.60       | 170        | 5.00       | 160        | 4.30       | 160        | 3.50       | 130        | 2.50       |
| 600        | 310        | 3.60       | 310        | 3.30       | 310        | 2.90       | 270        | 2.50       | 220        | 2.10       | 150        | 1.50       |
| 1000       | 410        | 2.80       | 370        | 2.50       | 330        | 2.30       | 290        | 2.00       | 240        | 1.60       | 170        | 1.10       |
| 1500       | 420        | 2.00       | 390        | 1.80       | 350        | 1.60       | 300        | 1.40       | 240        | 1.10       | 170        | 0.80       |
| 1E+04      | 520        | 0.47       | 470        | 0.43       | 420        | 0.38       | 360        | 0.33       | 300        | 0.27       | 210        | 0.19       |
| 1E+05      | 580        | 0.10       | 530        | 0.09       | 470        | 0.08       | 410        | 0.07       | 340        | 0.06       | 240        | 0.04       |
| 1E+06      | 620        | 0.11       | 570        | 0.10       | 510        | 0.09       | 440        | 0.08       | 360        | 0.06       | 250        | 0.04       |

47  $\mu$ F – 10 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 3.80       | 1          | 3.20       |
| 10         | 10         | 6.00       | 10         | 6.00       | 10         | 6.00       | 10         | 6.00       | 9          | 5.10       | 7          | 4.20       |
| 50         | 56         | 6.50       | 56         | 6.50       | 56         | 6.50       | 56         | 6.50       | 48         | 5.50       | 39         | 4.60       |
| 100        | 130        | 8.00       | 130        | 8.00       | 130        | 8.00       | 130        | 8.00       | 110        | 6.60       | 83         | 5.00       |
| 300        | 270        | 5.10       | 230        | 4.70       | 230        | 4.20       | 230        | 3.60       | 230        | 3.00       | 160        | 2.10       |
| 600        | 440        | 3.00       | 410        | 2.80       | 370        | 2.50       | 320        | 2.10       | 260        | 1.80       | 180        | 1.20       |
| 1000       | 490        | 2.30       | 450        | 2.10       | 400        | 1.90       | 350        | 1.70       | 280        | 1.30       | 200        | 0.95       |
| 1500       | 510        | 1.60       | 460        | 1.50       | 420        | 1.30       | 360        | 1.20       | 290        | 0.95       | 210        | 0.67       |
| 1E+04      | 620        | 0.40       | 570        | 0.36       | 510        | 0.32       | 440        | 0.28       | 360        | 0.23       | 250        | 0.16       |
| 1E+05      | 700        | 0.12       | 640        | 0.11       | 570        | 0.10       | 490        | 0.08       | 400        | 0.07       | 290        | 0.05       |
| 1E+06      | 750        | 0.13       | 680        | 0.12       | 610        | 0.10       | 530        | 0.09       | 430        | 0.07       | 300        | 0.05       |

68  $\mu$ F – 10 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 4.50       | 1          | 3.80       | 1          | 3.20       |
| 10         | 15         | 6.00       | 15         | 6.00       | 15         | 6.00       | 15         | 6.00       | 12         | 5.10       | 10         | 4.20       |
| 50         | 81         | 6.50       | 81         | 6.50       | 81         | 6.50       | 81         | 6.50       | 69         | 5.50       | 57         | 4.60       |
| 100        | 190        | 8.00       | 190        | 8.00       | 190        | 8.00       | 190        | 7.80       | 150        | 6.40       | 110        | 4.70       |
| 300        | 350        | 4.80       | 330        | 4.30       | 330        | 3.90       | 330        | 3.40       | 300        | 2.70       | 220        | 1.90       |
| 600        | 600        | 2.80       | 550        | 2.60       | 490        | 2.30       | 430        | 2.00       | 350        | 1.60       | 250        | 1.10       |
| 1000       | 660        | 2.20       | 600        | 2.00       | 540        | 1.80       | 470        | 1.50       | 380        | 1.20       | 270        | 0.88       |
| 1500       | 680        | 1.50       | 620        | 1.40       | 560        | 1.20       | 480        | 1.10       | 390        | 0.88       | 280        | 0.62       |
| 1E+04      | 830        | 0.37       | 760        | 0.33       | 680        | 0.30       | 590        | 0.26       | 480        | 0.21       | 340        | 0.15       |
| 1E+05      | 940        | 0.09       | 850        | 0.08       | 760        | 0.08       | 660        | 0.07       | 540        | 0.05       | 380        | 0.04       |
| 1E+06      | 1000       | 0.10       | 910        | 0.09       | 820        | 0.08       | 710        | 0.07       | 580        | 0.06       | 410        | 0.04       |

100  $\mu$ F – 10 V – case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 4.50                   | 2                      | 4.50                   | 2                      | 4.50                   | 2                      | 4.50                   | 1                      | 3.80                   | 1                      | 3.20                   |
| 10         | 22                     | 6.00                   | 22                     | 6.00                   | 22                     | 6.00                   | 22                     | 6.00                   | 18                     | 5.10                   | 15                     | 4.20                   |
| 50         | 120                    | 6.50                   | 120                    | 6.50                   | 120                    | 6.50                   | 120                    | 6.50                   | 100                    | 5.50                   | 83                     | 4.50                   |
| 100        | 280                    | 8.00                   | 280                    | 8.00                   | 270                    | 7.80                   | 230                    | 6.70                   | 190                    | 5.50                   | 160                    | 3.90                   |
| 300        | 480                    | 3.90                   | 480                    | 3.60                   | 480                    | 3.20                   | 450                    | 2.80                   | 370                    | 2.30                   | 260                    | 1.60                   |
| 600        | 730                    | 2.30                   | 670                    | 2.10                   | 600                    | 1.90                   | 520                    | 1.60                   | 420                    | 1.30                   | 300                    | 0.95                   |
| 1000       | 800                    | 1.80                   | 730                    | 1.60                   | 650                    | 1.50                   | 570                    | 1.30                   | 460                    | 1.00                   | 330                    | 0.73                   |
| 1500       | 830                    | 1.30                   | 750                    | 1.10                   | 670                    | 1.00                   | 580                    | 0.89                   | 480                    | 0.73                   | 340                    | 0.51                   |
| 1E+04      | 1010                   | 0.30                   | 920                    | 0.28                   | 820                    | 0.25                   | 710                    | 0.21                   | 580                    | 0.17                   | 410                    | 0.12                   |
| 1E+05      | 1140                   | 0.11                   | 1040                   | 0.10                   | 930                    | 0.09                   | 800                    | 0.08                   | 660                    | 0.06                   | 460                    | 0.05                   |
| 1E+06      | 1210                   | 0.12                   | 1110                   | 0.11                   | 990                    | 0.10                   | 860                    | 0.09                   | 700                    | 0.07                   | 500                    | 0.05                   |

150  $\mu$ F – 10 V – case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 4.50                   | 2                      | 4.50                   | 2                      | 4.50                   | 2                      | 4.50                   | 2                      | 3.80                   | 2                      | 3.20                   |
| 10         | 32                     | 6.00                   | 32                     | 6.00                   | 32                     | 6.00                   | 32                     | 6.00                   | 27                     | 5.10                   | 23                     | 4.20                   |
| 50         | 180                    | 6.50                   | 180                    | 6.50                   | 180                    | 6.50                   | 180                    | 6.50                   | 150                    | 5.50                   | 130                    | 4.50                   |
| 100        | 420                    | 8.00                   | 420                    | 8.00                   | 380                    | 7.20                   | 330                    | 6.30                   | 270                    | 5.10                   | 240                    | 3.60                   |
| 300        | 730                    | 3.70                   | 730                    | 3.30                   | 730                    | 3.00                   | 630                    | 2.60                   | 520                    | 2.10                   | 370                    | 1.50                   |
| 600        | 1020                   | 2.20                   | 930                    | 2.00                   | 840                    | 1.80                   | 720                    | 1.50                   | 590                    | 1.20                   | 420                    | 0.88                   |
| 1000       | 1120                   | 1.70                   | 1020                   | 1.50                   | 910                    | 1.40                   | 790                    | 1.20                   | 650                    | 0.96                   | 460                    | 0.68                   |
| 1500       | 1150                   | 1.20                   | 1050                   | 1.10                   | 940                    | 0.96                   | 820                    | 0.93                   | 670                    | 0.68                   | 470                    | 0.48                   |
| 1E+04      | 1410                   | 0.28                   | 1280                   | 0.26                   | 1150                   | 0.23                   | 990                    | 0.20                   | 810                    | 0.16                   | 570                    | 0.11                   |
| 1E+05      | 1590                   | 0.07                   | 1450                   | 0.06                   | 1300                   | 0.05                   | 1120                   | 0.05                   | 920                    | 0.04                   | 650                    | 0.03                   |
| 1E+06      | 1690                   | 0.09                   | 1550                   | 0.08                   | 1380                   | 0.07                   | 1200                   | 0.06                   | 980                    | 0.05                   | 690                    | 0.04                   |

220  $\mu$ F – 10 V – case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 4                      | 4.50                   | 4                      | 4.50                   | 4                      | 4.50                   | 4                      | 4.50                   | 3                      | 3.80                   | 2                      | 3.20                   |
| 10         | 48                     | 6.00                   | 48                     | 6.00                   | 48                     | 6.00                   | 48                     | 6.00                   | 40                     | 5.10                   | 33                     | 4.20                   |
| 50         | 260                    | 6.50                   | 260                    | 6.50                   | 260                    | 6.50                   | 260                    | 6.50                   | 220                    | 5.50                   | 170                    | 4.30                   |
| 100        | 610                    | 7.20                   | 530                    | 6.60                   | 450                    | 5.90                   | 390                    | 5.10                   | 350                    | 4.20                   | 350                    | 3.00                   |
| 300        | 1060                   | 3.00                   | 970                    | 2.70                   | 870                    | 2.40                   | 750                    | 2.10                   | 610                    | 1.70                   | 430                    | 1.20                   |
| 600        | 1220                   | 1.70                   | 1110                   | 1.60                   | 990                    | 1.40                   | 860                    | 1.20                   | 700                    | 1.00                   | 500                    | 0.71                   |
| 1000       | 1330                   | 1.30                   | 1210                   | 1.20                   | 1080                   | 1.10                   | 940                    | 0.95                   | 770                    | 0.78                   | 540                    | 0.55                   |
| 1500       | 1370                   | 0.95                   | 1250                   | 0.87                   | 1120                   | 0.78                   | 970                    | 0.67                   | 790                    | 0.55                   | 560                    | 0.39                   |
| 1E+04      | 1670                   | 0.23                   | 1530                   | 0.21                   | 1360                   | 0.19                   | 1180                   | 0.16                   | 960                    | 0.13                   | 680                    | 0.09                   |
| 1E+05      | 1880                   | 0.08                   | 1720                   | 0.07                   | 1540                   | 0.07                   | 1330                   | 0.06                   | 1090                   | 0.05                   | 770                    | 0.03                   |
| 1E+06      | 2010                   | 0.11                   | 1840                   | 0.10                   | 1640                   | 0.09                   | 1420                   | 0.07                   | 1160                   | 0.06                   | 820                    | 0.04                   |

330  $\mu\text{F}$  – 10 V – case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 5          | 4.50       | 5          | 4.50       | 5          | 4.50       | 5          | 4.50       | 5          | 3.80       | 4          | 3.20       |
| 10         | 71         | 6.00       | 71         | 6.00       | 71         | 6.00       | 71         | 6.00       | 60         | 5.10       | 50         | 4.20       |
| 50         | 390        | 6.50       | 390        | 6.50       | 390        | 6.50       | 390        | 6.50       | 330        | 5.40       | 250        | 4.10       |
| 100        | 900        | 6.80       | 750        | 6.20       | 640        | 5.50       | 550        | 4.80       | 530        | 3.90       | 490        | 2.80       |
| 300        | 1490       | 2.80       | 1360       | 2.50       | 1210       | 2.30       | 1050       | 2.00       | 860        | 1.60       | 610        | 1.10       |
| 600        | 1700       | 1.60       | 1560       | 1.50       | 1390       | 1.30       | 1200       | 1.20       | 980        | 0.94       | 700        | 0.67       |
| 1000       | 1860       | 1.30       | 1700       | 1.10       | 1520       | 1.00       | 1320       | 0.89       | 1070       | 0.73       | 760        | 0.51       |
| 1500       | 1920       | 0.89       | 1750       | 0.81       | 1570       | 0.72       | 1360       | 0.63       | 1110       | 0.51       | 780        | 0.36       |
| 1E+04      | 2340       | 0.21       | 2140       | 0.19       | 1910       | 0.17       | 1650       | 0.15       | 1350       | 0.12       | 960        | 0.09       |
| 1E+05      | 2640       | 0.07       | 2410       | 0.07       | 2160       | 0.06       | 1870       | 0.05       | 1520       | 0.04       | 1080       | 0.03       |
| 1E+06      | 2820       | 0.13       | 2570       | 0.12       | 2300       | 0.10       | 1990       | 0.09       | 1630       | 0.07       | 1150       | 0.05       |

470  $\mu\text{F}$  – 10 V – case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 8          | 4.50       | 8          | 4.50       | 8          | 4.50       | 8          | 4.50       | 6          | 3.80       | 5          | 3.20       |
| 10         | 100        | 6.00       | 100        | 6.00       | 100        | 6.00       | 100        | 6.00       | 86         | 5.10       | 71         | 4.20       |
| 50         | 560        | 6.50       | 560        | 6.50       | 560        | 6.50       | 510        | 5.90       | 420        | 4.80       | 320        | 3.50       |
| 100        | 1010       | 5.60       | 840        | 5.10       | 750        | 4.50       | 750        | 3.90       | 750        | 3.20       | 570        | 2.30       |
| 300        | 1740       | 2.30       | 1590       | 2.10       | 1420       | 1.90       | 1230       | 1.60       | 1010       | 1.30       | 710        | 0.93       |
| 600        | 2000       | 1.30       | 1820       | 1.20       | 1630       | 1.10       | 1410       | 0.95       | 1150       | 0.78       | 820        | 0.55       |
| 1000       | 2180       | 1.00       | 1990       | 0.95       | 1780       | 0.85       | 1540       | 0.73       | 1260       | 0.60       | 890        | 0.42       |
| 1500       | 2250       | 0.73       | 2060       | 0.67       | 1840       | 0.60       | 1590       | 0.52       | 1300       | 0.42       | 920        | 0.30       |
| 1E+04      | 2740       | 0.18       | 2500       | 0.16       | 2240       | 0.14       | 1940       | 0.12       | 1580       | 0.10       | 1120       | 0.07       |
| 1E+05      | 3100       | 0.09       | 2830       | 0.08       | 2530       | 0.07       | 2190       | 0.06       | 1790       | 0.05       | 1260       | 0.04       |
| 1E+06      | 3310       | 0.15       | 3020       | 0.14       | 2700       | 0.12       | 2340       | 0.11       | 1910       | 0.09       | 1350       | 0.06       |

680  $\mu\text{F}$  – 10 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 11         | 4.50       | 11         | 4.50       | 11         | 4.50       | 11         | 4.50       | 9          | 3.80       | 8          | 3.20       |
| 10         | 150        | 6.00       | 150        | 6.00       | 150        | 6.00       | 150        | 6.00       | 120        | 5.10       | 100        | 4.20       |
| 50         | 810        | 6.50       | 810        | 6.50       | 790        | 6.30       | 680        | 5.50       | 560        | 4.40       | 460        | 3.20       |
| 100        | 1260       | 5.10       | 1110       | 4.70       | 1090       | 4.20       | 1090       | 3.60       | 1080       | 3.00       | 760        | 2.10       |
| 300        | 2320       | 2.10       | 2110       | 1.90       | 1890       | 1.70       | 1640       | 1.50       | 1340       | 1.20       | 950        | 0.85       |
| 600        | 2650       | 1.20       | 2420       | 1.10       | 2170       | 1.00       | 1880       | 0.87       | 1530       | 0.71       | 1080       | 0.50       |
| 1000       | 2900       | 1.10       | 2640       | 1.00       | 2360       | 0.91       | 2050       | 0.78       | 1670       | 0.64       | 1180       | 0.45       |
| 1500       | 2990       | 0.90       | 2730       | 0.82       | 2440       | 0.73       | 2110       | 0.64       | 1730       | 0.52       | 1220       | 0.37       |
| 1E+04      | 3640       | 0.23       | 3330       | 0.21       | 2970       | 0.19       | 2580       | 0.16       | 2100       | 0.13       | 1490       | 0.09       |
| 1E+05      | 4110       | 0.12       | 3750       | 0.11       | 3360       | 0.09       | 2910       | 0.08       | 2370       | 0.07       | 1680       | 0.05       |
| 1E+06      | 4390       | 0.25       | 4010       | 0.23       | 3590       | 0.20       | 3100       | 0.18       | 2530       | 0.14       | 1790       | 0.10       |

1000  $\mu$ F – 10 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 16         | 4.50       | 16         | 4.50       | 16         | 4.50       | 16         | 4.50       | 14         | 3.80       | 11         | 3.20       |
| 10         | 220        | 6.00       | 220        | 6.00       | 220        | 6.00       | 220        | 6.00       | 180        | 5.10       | 150        | 4.20       |
| 50         | 1200       | 6.50       | 1160       | 6.30       | 1040       | 5.60       | 900        | 4.90       | 730        | 4.00       | 680        | 2.80       |
| 100        | 1600       | 4.60       | 1600       | 4.20       | 1600       | 3.70       | 1600       | 3.20       | 1410       | 2.60       | 1000       | 1.90       |
| 300        | 3040       | 1.90       | 2770       | 1.70       | 2480       | 1.50       | 2150       | 1.30       | 1750       | 1.10       | 1240       | 0.76       |
| 600        | 3480       | 1.10       | 3180       | 1.00       | 2840       | 0.90       | 2460       | 0.78       | 2010       | 0.63       | 1420       | 0.45       |
| 1000       | 3800       | 0.99       | 3470       | 0.90       | 3100       | 0.81       | 2680       | 0.70       | 2190       | 0.57       | 1550       | 0.40       |
| 1500       | 3920       | 0.80       | 3580       | 0.73       | 3200       | 0.65       | 2770       | 0.57       | 2260       | 0.46       | 1600       | 0.33       |
| 1E+04      | 4780       | 0.20       | 4360       | 0.19       | 3900       | 0.17       | 3380       | 0.14       | 2760       | 0.12       | 1950       | 0.08       |
| 1E+05      | 5390       | 0.15       | 4920       | 0.14       | 4400       | 0.12       | 3810       | 0.11       | 3110       | 0.09       | 2200       | 0.06       |
| 1E+06      | 5760       | 0.30       | 5250       | 0.28       | 4700       | 0.25       | 4070       | 0.21       | 3320       | 0.18       | 2350       | 0.12       |

10  $\mu$ F – 16 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 7.20       | 0          | 7.20       | 0          | 7.20       | 0          | 7.20       | 0          | 6.10       | 0          | 5.00       |
| 10         | 3          | 9.60       | 3          | 9.60       | 3          | 9.60       | 3          | 9.60       | 3          | 8.10       | 2          | 6.70       |
| 50         | 19         | 10.40      | 19         | 10.40      | 19         | 10.40      | 19         | 10.40      | 16         | 8.80       | 13         | 7.30       |
| 100        | 45         | 12.80      | 45         | 12.80      | 45         | 12.80      | 45         | 12.80      | 38         | 10.80      | 31         | 8.90       |
| 300        | 140        | 12.50      | 130        | 11.40      | 110        | 10.20      | 94         | 8.80       | 78         | 7.20       | 78         | 5.10       |
| 600        | 150        | 7.40       | 150        | 6.70       | 150        | 6.00       | 150        | 5.20       | 140        | 4.30       | 96         | 3.00       |
| 1000       | 210        | 5.70       | 210        | 5.20       | 210        | 4.60       | 180        | 4.00       | 150        | 3.30       | 100        | 2.30       |
| 1500       | 260        | 4.00       | 240        | 3.70       | 220        | 3.30       | 190        | 2.80       | 150        | 2.30       | 110        | 1.60       |
| 1E+04      | 320        | 0.96       | 290        | 0.88       | 260        | 0.79       | 230        | 0.68       | 190        | 0.56       | 130        | 0.39       |
| 1E+05      | 360        | 0.13       | 330        | 0.12       | 300        | 0.11       | 260        | 0.09       | 210        | 0.07       | 150        | 0.05       |
| 1E+06      | 390        | 0.14       | 360        | 0.13       | 320        | 0.11       | 280        | 0.10       | 220        | 0.08       | 160        | 0.06       |

15  $\mu$ F – 16 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 7.20       | 0          | 7.20       | 0          | 7.20       | 0          | 7.20       | 0          | 6.10       | 0          | 5.00       |
| 10         | 5          | 9.60       | 5          | 9.60       | 5          | 9.60       | 5          | 9.60       | 4          | 8.10       | 4          | 6.70       |
| 50         | 29         | 10.40      | 29         | 10.40      | 29         | 10.40      | 29         | 10.40      | 24         | 8.80       | 20         | 7.30       |
| 100        | 68         | 12.80      | 68         | 12.80      | 68         | 12.80      | 68         | 12.80      | 57         | 10.80      | 47         | 8.80       |
| 300        | 190        | 10.10      | 150        | 9.20       | 130        | 8.30       | 120        | 7.20       | 120        | 5.90       | 100        | 4.10       |
| 600        | 230        | 6.00       | 230        | 5.50       | 230        | 4.90       | 200        | 4.20       | 160        | 3.50       | 120        | 2.40       |
| 1000       | 310        | 4.60       | 280        | 4.20       | 250        | 3.80       | 220        | 3.30       | 180        | 2.70       | 130        | 1.90       |
| 1500       | 320        | 3.20       | 290        | 3.00       | 260        | 2.70       | 230        | 2.30       | 190        | 1.90       | 130        | 1.30       |
| 1E+04      | 390        | 0.78       | 360        | 0.71       | 320        | 0.64       | 280        | 0.55       | 230        | 0.45       | 160        | 0.32       |
| 1E+05      | 440        | 0.16       | 400        | 0.14       | 360        | 0.13       | 310        | 0.11       | 260        | 0.09       | 180        | 0.06       |
| 1E+06      | 470        | 0.17       | 430        | 0.15       | 390        | 0.14       | 330        | 0.12       | 270        | 0.10       | 190        | 0.07       |



22  $\mu\text{F}$  – 16 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 6.10       | 0          | 5.00       |
| 10         | 8          | 9.60       | 8          | 9.60       | 8          | 9.60       | 8          | 9.60       | 6          | 8.10       | 5          | 6.70       |
| 50         | 42         | 10.40      | 42         | 10.40      | 42         | 10.40      | 42         | 10.40      | 36         | 8.80       | 30         | 7.30       |
| 100        | 99         | 12.80      | 99         | 12.80      | 99         | 12.80      | 99         | 12.70      | 82         | 10.60      | 63         | 8.10       |
| 300        | 210        | 8.40       | 180        | 7.60       | 170        | 6.80       | 170        | 5.90       | 170        | 4.80       | 120        | 3.40       |
| 600        | 330        | 4.90       | 320        | 4.50       | 280        | 4.00       | 240        | 3.50       | 200        | 2.80       | 140        | 2.00       |
| 1000       | 380        | 3.80       | 340        | 3.50       | 310        | 3.10       | 270        | 2.70       | 220        | 2.20       | 150        | 1.60       |
| 1500       | 390        | 2.70       | 360        | 2.40       | 320        | 2.20       | 270        | 1.90       | 220        | 1.50       | 160        | 1.10       |
| 1E+04      | 470        | 0.64       | 430        | 0.59       | 390        | 0.53       | 340        | 0.45       | 270        | 0.37       | 190        | 0.26       |
| 1E+05      | 530        | 0.19       | 490        | 0.17       | 440        | 0.15       | 380        | 0.13       | 310        | 0.11       | 220        | 0.08       |
| 1E+06      | 570        | 0.20       | 520        | 0.18       | 470        | 0.17       | 400        | 0.14       | 330        | 0.12       | 230        | 0.08       |

33  $\mu\text{F}$  – 16 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 6.10       | 1          | 5.00       |
| 10         | 11         | 9.60       | 11         | 9.60       | 11         | 9.60       | 11         | 9.60       | 10         | 8.10       | 8          | 6.70       |
| 50         | 64         | 10.40      | 64         | 10.40      | 64         | 10.40      | 64         | 10.40      | 54         | 8.80       | 45         | 7.30       |
| 100        | 150        | 12.80      | 150        | 12.80      | 150        | 12.80      | 150        | 12.50      | 120        | 10.40      | 89         | 7.60       |
| 300        | 270        | 7.70       | 260        | 7.10       | 260        | 6.30       | 260        | 5.50       | 240        | 4.50       | 170        | 3.20       |
| 600        | 480        | 4.60       | 440        | 4.20       | 390        | 3.70       | 340        | 3.20       | 280        | 2.60       | 200        | 1.90       |
| 1000       | 520        | 3.50       | 480        | 3.20       | 430        | 2.90       | 370        | 2.50       | 300        | 2.00       | 210        | 1.40       |
| 1500       | 540        | 2.50       | 490        | 2.30       | 440        | 2.00       | 380        | 1.80       | 310        | 1.40       | 220        | 1.00       |
| 1E+04      | 660        | 0.60       | 600        | 0.54       | 540        | 0.49       | 470        | 0.42       | 380        | 0.34       | 270        | 0.24       |
| 1E+05      | 740        | 0.16       | 680        | 0.14       | 610        | 0.13       | 530        | 0.11       | 430        | 0.09       | 300        | 0.06       |
| 1E+06      | 790        | 0.17       | 730        | 0.16       | 650        | 0.14       | 560        | 0.12       | 460        | 0.10       | 320        | 0.07       |

47  $\mu\text{F}$  – 16 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 7.20       | 1          | 6.10       | 1          | 5.00       |
| 10         | 16         | 9.60       | 16         | 9.60       | 16         | 9.60       | 16         | 9.60       | 14         | 8.10       | 11         | 6.70       |
| 50         | 91         | 10.40      | 91         | 10.40      | 91         | 10.40      | 91         | 10.40      | 77         | 8.80       | 63         | 7.20       |
| 100        | 210        | 12.80      | 210        | 12.80      | 210        | 12.80      | 180        | 11.10      | 150        | 9.10       | 120        | 6.50       |
| 300        | 370        | 6.50       | 370        | 5.90       | 370        | 5.30       | 350        | 4.60       | 290        | 3.70       | 200        | 2.60       |
| 600        | 570        | 3.80       | 520        | 3.50       | 470        | 3.10       | 410        | 2.70       | 330        | 2.20       | 230        | 1.60       |
| 1000       | 630        | 2.90       | 570        | 2.70       | 510        | 2.40       | 440        | 2.10       | 360        | 1.70       | 260        | 1.20       |
| 1500       | 650        | 2.10       | 590        | 1.90       | 530        | 1.70       | 460        | 1.50       | 370        | 1.20       | 260        | 0.85       |
| 1E+04      | 790        | 0.50       | 720        | 0.46       | 640        | 0.41       | 560        | 0.35       | 450        | 0.29       | 320        | 0.20       |
| 1E+05      | 890        | 0.15       | 810        | 0.14       | 720        | 0.12       | 630        | 0.11       | 510        | 0.09       | 360        | 0.06       |
| 1E+06      | 950        | 0.16       | 870        | 0.15       | 770        | 0.13       | 670        | 0.12       | 550        | 0.09       | 390        | 0.07       |

68  $\mu\text{F}$  – 16 V – case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 7.20                   | 2                      | 7.20                   | 2                      | 7.20                   | 2                      | 7.20                   | 2                      | 6.10                   | 1                      | 5.00                   |
| 10         | 24                     | 9.60                   | 24                     | 9.60                   | 24                     | 9.60                   | 24                     | 9.60                   | 20                     | 8.10                   | 17                     | 6.70                   |
| 50         | 130                    | 10.40                  | 130                    | 10.40                  | 130                    | 10.40                  | 130                    | 10.40                  | 110                    | 8.80                   | 90                     | 7.20                   |
| 100        | 310                    | 12.80                  | 290                    | 12.00                  | 260                    | 10.70                  | 220                    | 9.20                   | 180                    | 7.60                   | 180                    | 5.40                   |
| 300        | 530                    | 5.40                   | 530                    | 4.90                   | 490                    | 4.40                   | 420                    | 3.80                   | 350                    | 3.10                   | 240                    | 2.20                   |
| 600        | 690                    | 3.20                   | 630                    | 2.90                   | 560                    | 2.60                   | 490                    | 2.20                   | 400                    | 1.80                   | 280                    | 1.30                   |
| 1000       | 750                    | 2.40                   | 680                    | 2.20                   | 610                    | 2.00                   | 530                    | 1.70                   | 430                    | 1.40                   | 310                    | 1.00                   |
| 1500       | 770                    | 1.70                   | 710                    | 1.60                   | 630                    | 1.40                   | 550                    | 1.20                   | 450                    | 1.00                   | 320                    | 0.70                   |
| 1E+04      | 940                    | 0.41                   | 860                    | 0.38                   | 770                    | 0.34                   | 670                    | 0.29                   | 540                    | 0.24                   | 390                    | 0.17                   |
| 1E+05      | 1060                   | 0.18                   | 970                    | 0.16                   | 870                    | 0.15                   | 750                    | 0.13                   | 610                    | 0.10                   | 430                    | 0.07                   |
| 1E+06      | 1140                   | 0.20                   | 1040                   | 0.18                   | 930                    | 0.16                   | 800                    | 0.14                   | 660                    | 0.11                   | 460                    | 0.08                   |

100  $\mu\text{F}$  – 16 V – case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 3                      | 7.20                   | 3                      | 7.20                   | 3                      | 7.20                   | 3                      | 7.20                   | 2                      | 6.10                   | 2                      | 5.00                   |
| 10         | 35                     | 9.60                   | 35                     | 9.60                   | 35                     | 9.60                   | 35                     | 9.60                   | 29                     | 8.10                   | 24                     | 6.70                   |
| 50         | 190                    | 10.40                  | 190                    | 10.40                  | 190                    | 10.40                  | 190                    | 10.40                  | 160                    | 8.80                   | 130                    | 7.10                   |
| 100        | 450                    | 12.30                  | 410                    | 11.30                  | 350                    | 10.10                  | 310                    | 8.70                   | 260                    | 7.10                   | 260                    | 5.00                   |
| 300        | 780                    | 5.00                   | 760                    | 4.60                   | 680                    | 4.10                   | 590                    | 3.60                   | 480                    | 2.90                   | 340                    | 2.10                   |
| 600        | 950                    | 3.00                   | 870                    | 2.70                   | 770                    | 2.40                   | 670                    | 2.10                   | 550                    | 1.70                   | 390                    | 1.20                   |
| 1000       | 1030                   | 2.30                   | 940                    | 2.10                   | 840                    | 1.90                   | 730                    | 1.60                   | 600                    | 1.30                   | 420                    | 0.94                   |
| 1500       | 1070                   | 1.60                   | 980                    | 1.50                   | 870                    | 1.30                   | 760                    | 1.10                   | 620                    | 0.93                   | 440                    | 0.66                   |
| 1E+04      | 1300                   | 0.39                   | 1190                   | 0.35                   | 1060                   | 0.32                   | 920                    | 0.27                   | 750                    | 0.22                   | 530                    | 0.16                   |
| 1E+05      | 1470                   | 0.17                   | 1340                   | 0.15                   | 1200                   | 0.14                   | 1040                   | 0.12                   | 850                    | 0.10                   | 600                    | 0.07                   |
| 1E+06      | 1570                   | 0.18                   | 1430                   | 0.17                   | 1280                   | 0.15                   | 1110                   | 0.13                   | 910                    | 0.11                   | 640                    | 0.08                   |

150  $\mu\text{F}$  – 16 V – case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 4                      | 7.20                   | 4                      | 7.20                   | 4                      | 7.20                   | 4                      | 7.20                   | 3                      | 6.10                   | 3                      | 5.00                   |
| 10         | 52                     | 9.60                   | 52                     | 9.60                   | 52                     | 9.60                   | 52                     | 9.60                   | 44                     | 8.10                   | 36                     | 6.70                   |
| 50         | 290                    | 10.40                  | 290                    | 10.40                  | 290                    | 10.40                  | 270                    | 9.90                   | 230                    | 8.10                   | 160                    | 5.90                   |
| 100        | 570                    | 9.50                   | 470                    | 8.70                   | 410                    | 7.80                   | 390                    | 6.70                   | 390                    | 5.50                   | 310                    | 3.90                   |
| 300        | 960                    | 3.90                   | 870                    | 3.60                   | 780                    | 3.20                   | 680                    | 2.80                   | 550                    | 2.20                   | 390                    | 1.60                   |
| 600        | 1090                   | 2.30                   | 1000                   | 2.10                   | 890                    | 1.90                   | 770                    | 1.60                   | 630                    | 1.30                   | 450                    | 0.94                   |
| 1000       | 1190                   | 1.80                   | 1090                   | 1.60                   | 980                    | 1.40                   | 840                    | 1.30                   | 690                    | 1.00                   | 490                    | 0.72                   |
| 1500       | 1230                   | 1.20                   | 1130                   | 1.10                   | 1010                   | 1.00                   | 870                    | 0.88                   | 710                    | 0.72                   | 500                    | 0.51                   |
| 1E+04      | 1500                   | 0.30                   | 1370                   | 0.27                   | 1230                   | 0.24                   | 1060                   | 0.21                   | 870                    | 0.17                   | 610                    | 0.12                   |
| 1E+05      | 1700                   | 0.19                   | 1550                   | 0.18                   | 1380                   | 0.16                   | 1200                   | 0.14                   | 980                    | 0.11                   | 690                    | 0.08                   |
| 1E+06      | 1810                   | 0.21                   | 1650                   | 0.19                   | 1480                   | 0.17                   | 1280                   | 0.15                   | 1050                   | 0.12                   | 740                    | 0.09                   |

220  $\mu$ F – 16 V – case size 5

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 6                      | 7.20                   | 6                      | 7.20                   | 6                      | 7.20                   | 6                      | 7.20                   | 5                      | 6.10                   | 4                      | 5.00                   |
| 10         | 76                     | 9.60                   | 76                     | 9.60                   | 76                     | 9.60                   | 76                     | 9.60                   | 65                     | 8.10                   | 53                     | 6.70                   |
| 50         | 420                    | 10.40                  | 420                    | 10.40                  | 420                    | 10.40                  | 370                    | 9.20                   | 300                    | 7.50                   | 240                    | 5.40                   |
| 100        | 720                    | 8.70                   | 610                    | 7.90                   | 560                    | 7.10                   | 560                    | 6.10                   | 560                    | 5.00                   | 420                    | 3.50                   |
| 300        | 1270                   | 3.50                   | 1160                   | 3.20                   | 1040                   | 2.90                   | 900                    | 2.50                   | 740                    | 2.00                   | 520                    | 1.40                   |
| 600        | 1460                   | 2.10                   | 1330                   | 1.90                   | 1190                   | 1.70                   | 1030                   | 1.50                   | 840                    | 1.20                   | 600                    | 0.85                   |
| 1000       | 1590                   | 1.60                   | 1450                   | 1.50                   | 1300                   | 1.30                   | 1130                   | 1.10                   | 920                    | 0.93                   | 650                    | 0.66                   |
| 1500       | 1640                   | 1.10                   | 1500                   | 1.00                   | 1340                   | 0.93                   | 1160                   | 0.80                   | 950                    | 0.66                   | 670                    | 0.46                   |
| 1E+04      | 2000                   | 0.27                   | 1830                   | 0.25                   | 1640                   | 0.22                   | 1420                   | 0.19                   | 1160                   | 0.16                   | 820                    | 0.11                   |
| 1E+05      | 2260                   | 0.13                   | 2060                   | 0.12                   | 1850                   | 0.10                   | 1600                   | 0.09                   | 1310                   | 0.07                   | 920                    | 0.05                   |
| 1E+06      | 2410                   | 0.16                   | 2200                   | 0.15                   | 1970                   | 0.13                   | 1710                   | 0.11                   | 1390                   | 0.09                   | 990                    | 0.07                   |

330  $\mu$ F – 16 V – case size 5

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 9                      | 7.20                   | 9                      | 7.20                   | 9                      | 7.20                   | 9                      | 7.20                   | 7                      | 6.10                   | 6                      | 5.00                   |
| 10         | 110                    | 9.60                   | 110                    | 9.60                   | 110                    | 9.60                   | 110                    | 9.60                   | 97                     | 8.10                   | 80                     | 6.70                   |
| 50         | 630                    | 10.40                  | 600                    | 9.80                   | 530                    | 8.80                   | 460                    | 7.60                   | 380                    | 6.20                   | 360                    | 4.40                   |
| 100        | 850                    | 7.10                   | 850                    | 6.50                   | 850                    | 5.80                   | 850                    | 5.00                   | 730                    | 4.10                   | 510                    | 2.90                   |
| 300        | 1560                   | 2.90                   | 1420                   | 2.60                   | 1270                   | 2.40                   | 1100                   | 2.00                   | 900                    | 1.70                   | 640                    | 1.20                   |
| 600        | 1790                   | 1.70                   | 1630                   | 1.60                   | 1460                   | 1.40                   | 1260                   | 1.20                   | 1030                   | 0.99                   | 730                    | 0.70                   |
| 1000       | 1950                   | 1.30                   | 1780                   | 1.20                   | 1590                   | 1.10                   | 1380                   | 0.93                   | 1130                   | 0.76                   | 800                    | 0.54                   |
| 1500       | 2010                   | 0.93                   | 1840                   | 0.85                   | 1640                   | 0.76                   | 1420                   | 0.66                   | 1160                   | 0.54                   | 820                    | 0.38                   |
| 1E+04      | 2450                   | 0.22                   | 2240                   | 0.20                   | 2000                   | 0.18                   | 1740                   | 0.16                   | 1420                   | 0.13                   | 1000                   | 0.09                   |
| 1E+05      | 2770                   | 0.16                   | 2530                   | 0.14                   | 2260                   | 0.13                   | 1960                   | 0.11                   | 1600                   | 0.09                   | 1130                   | 0.06                   |
| 1E+06      | 2960                   | 0.20                   | 2700                   | 0.18                   | 2410                   | 0.16                   | 2090                   | 0.14                   | 1710                   | 0.11                   | 1210                   | 0.08                   |

470  $\mu$ F – 16 V – case size 6

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 12                     | 7.20                   | 12                     | 7.20                   | 12                     | 7.20                   | 12                     | 7.20                   | 10                     | 6.10                   | 9                      | 5.00                   |
| 10         | 160                    | 9.60                   | 160                    | 9.60                   | 160                    | 9.60                   | 160                    | 9.60                   | 140                    | 8.10                   | 110                    | 6.70                   |
| 50         | 900                    | 9.90                   | 820                    | 9.10                   | 700                    | 8.10                   | 610                    | 7.00                   | 520                    | 5.70                   | 520                    | 4.10                   |
| 100        | 1210                   | 6.50                   | 1210                   | 6.00                   | 1210                   | 5.30                   | 1170                   | 4.60                   | 960                    | 3.80                   | 680                    | 2.70                   |
| 300        | 2050                   | 2.70                   | 1870                   | 2.40                   | 1680                   | 2.20                   | 1450                   | 1.90                   | 1190                   | 1.50                   | 840                    | 1.10                   |
| 600        | 2350                   | 1.60                   | 2150                   | 1.40                   | 1920                   | 1.30                   | 1660                   | 1.10                   | 1360                   | 0.91                   | 960                    | 0.64                   |
| 1000       | 2570                   | 1.40                   | 2340                   | 1.30                   | 2100                   | 1.20                   | 1820                   | 1.00                   | 1480                   | 0.82                   | 1050                   | 0.58                   |
| 1500       | 2650                   | 1.10                   | 2420                   | 1.00                   | 2160                   | 0.94                   | 1870                   | 0.81                   | 1530                   | 0.66                   | 1080                   | 0.47                   |
| 1E+04      | 3230                   | 0.29                   | 2950                   | 0.27                   | 2640                   | 0.24                   | 2280                   | 0.21                   | 1860                   | 0.17                   | 1320                   | 0.12                   |
| 1E+05      | 3640                   | 0.21                   | 3330                   | 0.19                   | 2970                   | 0.17                   | 2580                   | 0.15                   | 2100                   | 0.12                   | 1490                   | 0.08                   |
| 1E+06      | 3890                   | 0.29                   | 3550                   | 0.27                   | 3180                   | 0.24                   | 2750                   | 0.21                   | 2250                   | 0.17                   | 1590                   | 0.12                   |

680  $\mu$ F – 16 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 18         | 7.20       | 18         | 7.20       | 18         | 7.20       | 18         | 7.20       | 15         | 6.10       | 12         | 5.00       |
| 10         | 240        | 9.60       | 240        | 9.60       | 240        | 9.60       | 240        | 9.60       | 200        | 8.10       | 160        | 6.70       |
| 50         | 1240       | 8.60       | 1040       | 7.90       | 880        | 7.00       | 760        | 6.10       | 750        | 5.00       | 680        | 3.50       |
| 100        | 1740       | 5.70       | 1740       | 5.20       | 1700       | 4.60       | 1470       | 4.00       | 1200       | 3.30       | 850        | 2.30       |
| 300        | 2580       | 2.30       | 2350       | 2.10       | 2100       | 1.90       | 1820       | 1.60       | 1490       | 1.30       | 1050       | 0.95       |
| 600        | 2950       | 1.40       | 2690       | 1.20       | 2410       | 1.10       | 2090       | 0.97       | 1700       | 0.79       | 1200       | 0.56       |
| 1000       | 3220       | 1.20       | 2940       | 1.10       | 2630       | 1.00       | 2280       | 0.87       | 1860       | 0.71       | 1320       | 0.50       |
| 1500       | 3330       | 1.00       | 3040       | 0.91       | 2720       | 0.81       | 2350       | 0.71       | 1920       | 0.58       | 1360       | 0.41       |
| 1E+04      | 4050       | 0.26       | 3700       | 0.23       | 3310       | 0.21       | 2870       | 0.18       | 2340       | 0.15       | 1650       | 0.10       |
| 1E+05      | 4570       | 0.19       | 4170       | 0.18       | 3730       | 0.16       | 3230       | 0.14       | 2640       | 0.11       | 1870       | 0.08       |
| 1E+06      | 4880       | 0.30       | 4460       | 0.27       | 3990       | 0.24       | 3450       | 0.21       | 2820       | 0.17       | 1990       | 0.12       |

10  $\mu$ F – 20 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.00       | 0          | 9.00       | 0          | 9.00       | 0          | 9.00       | 0          | 7.60       | 0          | 6.30       |
| 10         | 4          | 12.00      | 4          | 12.00      | 4          | 12.00      | 4          | 12.00      | 4          | 10.20      | 3          | 8.40       |
| 50         | 24         | 13.00      | 24         | 13.00      | 24         | 13.00      | 24         | 13.00      | 20         | 11.00      | 17         | 9.10       |
| 100        | 56         | 16.00      | 56         | 16.00      | 56         | 16.00      | 56         | 16.00      | 47         | 13.50      | 39         | 11.00      |
| 300        | 150        | 12.50      | 130        | 11.40      | 110        | 10.20      | 98         | 8.90       | 98         | 7.20       | 84         | 5.10       |
| 600        | 190        | 7.40       | 190        | 6.70       | 190        | 6.00       | 170        | 5.20       | 140        | 4.30       | 96         | 3.00       |
| 1000       | 260        | 5.70       | 230        | 5.20       | 210        | 4.60       | 180        | 4.00       | 150        | 3.30       | 100        | 2.30       |
| 1500       | 260        | 4.00       | 240        | 3.70       | 220        | 3.30       | 190        | 2.80       | 150        | 2.30       | 110        | 1.60       |
| 1E+04      | 320        | 0.96       | 290        | 0.88       | 260        | 0.79       | 230        | 0.68       | 190        | 0.56       | 130        | 0.39       |
| 1E+05      | 360        | 0.13       | 330        | 0.12       | 300        | 0.11       | 260        | 0.09       | 210        | 0.07       | 150        | 0.05       |
| 1E+06      | 390        | 0.14       | 360        | 0.13       | 320        | 0.11       | 280        | 0.10       | 220        | 0.08       | 160        | 0.06       |

15  $\mu$ F – 20 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 9.00       | 1          | 9.00       | 1          | 9.00       | 1          | 9.00       | 0          | 7.60       | 0          | 6.30       |
| 10         | 7          | 12.00      | 7          | 12.00      | 7          | 12.00      | 7          | 12.00      | 6          | 10.20      | 5          | 8.40       |
| 50         | 36         | 13.00      | 36         | 13.00      | 36         | 13.00      | 36         | 13.00      | 31         | 11.00      | 25         | 9.10       |
| 100        | 84         | 16.00      | 84         | 16.00      | 84         | 16.00      | 84         | 15.90      | 70         | 13.20      | 52         | 9.90       |
| 300        | 170        | 10.10      | 150        | 9.20       | 150        | 8.30       | 150        | 7.20       | 140        | 5.90       | 100        | 4.10       |
| 600        | 280        | 6.00       | 260        | 5.50       | 230        | 4.90       | 200        | 4.20       | 160        | 3.50       | 120        | 2.40       |
| 1000       | 310        | 4.60       | 280        | 4.20       | 250        | 3.80       | 220        | 3.30       | 180        | 2.70       | 130        | 1.90       |
| 1500       | 320        | 3.20       | 290        | 3.00       | 260        | 2.70       | 230        | 2.30       | 190        | 1.90       | 130        | 1.30       |
| 1E+04      | 390        | 0.78       | 360        | 0.71       | 320        | 0.64       | 280        | 0.55       | 230        | 0.45       | 160        | 0.32       |
| 1E+05      | 440        | 0.16       | 400        | 0.14       | 360        | 0.13       | 310        | 0.11       | 260        | 0.09       | 180        | 0.06       |
| 1E+06      | 470        | 0.17       | 430        | 0.15       | 390        | 0.14       | 330        | 0.12       | 270        | 0.10       | 190        | 0.07       |

47  $\mu\text{F}$  – 20 V – case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 9.00                   | 2                      | 9.00                   | 2                      | 9.00                   | 2                      | 9.00                   | 1                      | 7.60                   | 1                      | 6.30                   |
| 10         | 20                     | 12.00                  | 20                     | 12.00                  | 20                     | 12.00                  | 20                     | 12.00                  | 17                     | 10.20                  | 14                     | 8.40                   |
| 50         | 110                    | 13.00                  | 110                    | 13.00                  | 110                    | 13.00                  | 110                    | 13.00                  | 95                     | 11.00                  | 78                     | 8.90                   |
| 100        | 260                    | 15.80                  | 250                    | 14.50                  | 210                    | 12.90                  | 180                    | 11.20                  | 150                    | 9.10                   | 150                    | 6.50                   |
| 300        | 460                    | 6.50                   | 460                    | 5.90                   | 410                    | 5.30                   | 350                    | 4.60                   | 290                    | 3.70                   | 200                    | 2.60                   |
| 600        | 570                    | 3.80                   | 520                    | 3.50                   | 470                    | 3.10                   | 410                    | 2.70                   | 330                    | 2.20                   | 230                    | 1.60                   |
| 1000       | 630                    | 2.90                   | 570                    | 2.70                   | 510                    | 2.40                   | 440                    | 2.10                   | 360                    | 1.70                   | 260                    | 1.20                   |
| 1500       | 650                    | 2.10                   | 590                    | 1.90                   | 530                    | 1.70                   | 460                    | 1.50                   | 370                    | 1.20                   | 260                    | 0.85                   |
| 1E+04      | 790                    | 0.50                   | 720                    | 0.46                   | 640                    | 0.41                   | 560                    | 0.35                   | 450                    | 0.29                   | 320                    | 0.20                   |
| 1E+05      | 890                    | 0.25                   | 810                    | 0.23                   | 720                    | 0.20                   | 630                    | 0.18                   | 510                    | 0.14                   | 360                    | 0.10                   |
| 1E+06      | 950                    | 0.27                   | 870                    | 0.25                   | 770                    | 0.22                   | 670                    | 0.19                   | 550                    | 0.16                   | 390                    | 0.11                   |

100  $\mu\text{F}$  – 20 V – case size 4

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 3                      | 9.00                   | 3                      | 9.00                   | 3                      | 9.00                   | 3                      | 9.00                   | 3                      | 7.60                   | 2                      | 6.30                   |
| 10         | 44                     | 12.00                  | 44                     | 12.00                  | 44                     | 12.00                  | 44                     | 12.00                  | 37                     | 10.20                  | 30                     | 8.40                   |
| 50         | 240                    | 13.00                  | 240                    | 13.00                  | 240                    | 13.00                  | 230                    | 12.60                  | 190                    | 10.40                  | 140                    | 7.60                   |
| 100        | 500                    | 12.30                  | 410                    | 11.30                  | 350                    | 10.10                  | 320                    | 8.70                   | 320                    | 7.10                   | 270                    | 5.00                   |
| 300        | 830                    | 5.00                   | 760                    | 4.60                   | 680                    | 4.10                   | 590                    | 3.60                   | 480                    | 2.90                   | 340                    | 2.10                   |
| 600        | 950                    | 3.00                   | 870                    | 2.70                   | 770                    | 2.40                   | 670                    | 2.10                   | 550                    | 1.70                   | 390                    | 1.20                   |
| 1000       | 1030                   | 2.30                   | 940                    | 2.10                   | 840                    | 1.90                   | 730                    | 1.60                   | 600                    | 1.30                   | 420                    | 0.94                   |
| 1500       | 1070                   | 1.60                   | 980                    | 1.50                   | 870                    | 1.30                   | 760                    | 1.10                   | 620                    | 0.93                   | 440                    | 0.66                   |
| 1E+04      | 1300                   | 0.39                   | 1190                   | 0.35                   | 1060                   | 0.32                   | 920                    | 0.27                   | 750                    | 0.22                   | 530                    | 0.16                   |
| 1E+05      | 1470                   | 0.17                   | 1340                   | 0.15                   | 1200                   | 0.14                   | 1040                   | 0.12                   | 850                    | 0.10                   | 600                    | 0.07                   |
| 1E+06      | 1570                   | 0.18                   | 1430                   | 0.17                   | 1280                   | 0.15                   | 1110                   | 0.13                   | 910                    | 0.11                   | 640                    | 0.08                   |

150  $\mu\text{F}$  – 20 V – case size 5

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 5                      | 9.00                   | 5                      | 9.00                   | 5                      | 9.00                   | 5                      | 9.00                   | 4                      | 7.60                   | 3                      | 6.30                   |
| 10         | 65                     | 12.00                  | 65                     | 12.00                  | 65                     | 12.00                  | 65                     | 12.00                  | 55                     | 10.20                  | 46                     | 8.40                   |
| 50         | 360                    | 13.00                  | 360                    | 13.00                  | 360                    | 13.00                  | 310                    | 11.40                  | 260                    | 9.30                   | 210                    | 6.70                   |
| 100        | 610                    | 10.70                  | 520                    | 9.80                   | 480                    | 8.80                   | 480                    | 7.60                   | 480                    | 6.20                   | 350                    | 4.40                   |
| 300        | 1080                   | 4.40                   | 980                    | 4.00                   | 880                    | 3.60                   | 760                    | 3.10                   | 620                    | 2.50                   | 440                    | 1.80                   |
| 600        | 1230                   | 2.60                   | 1130                   | 2.40                   | 1010                   | 2.10                   | 870                    | 1.80                   | 710                    | 1.50                   | 500                    | 1.10                   |
| 1000       | 1350                   | 2.00                   | 1230                   | 1.80                   | 1100                   | 1.60                   | 950                    | 1.40                   | 780                    | 1.20                   | 550                    | 0.81                   |
| 1500       | 1390                   | 1.40                   | 1270                   | 1.30                   | 1130                   | 1.10                   | 980                    | 0.99                   | 800                    | 0.81                   | 570                    | 0.57                   |
| 1E+04      | 1690                   | 0.34                   | 1550                   | 0.31                   | 1380                   | 0.28                   | 1200                   | 0.24                   | 980                    | 0.19                   | 690                    | 0.14                   |
| 1E+05      | 1910                   | 0.16                   | 1740                   | 0.15                   | 1560                   | 0.13                   | 1350                   | 0.11                   | 1100                   | 0.09                   | 780                    | 0.07                   |
| 1E+06      | 2040                   | 0.19                   | 1860                   | 0.17                   | 1670                   | 0.15                   | 1440                   | 0.13                   | 1180                   | 0.11                   | 830                    | 0.08                   |

220  $\mu$ F – 20 V – case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 7          | 9.00       | 7          | 9.00       | 7          | 9.00       | 7          | 9.00       | 6          | 7.60       | 5          | 6.30       |
| 10         | 95         | 12.00      | 95         | 12.00      | 95         | 12.00      | 95         | 12.00      | 81         | 10.20      | 67         | 8.40       |
| 50         | 530        | 13.00      | 500        | 12.00      | 430        | 10.70      | 380        | 9.30       | 310        | 7.60       | 300        | 5.40       |
| 100        | 710        | 8.70       | 710        | 7.90       | 710        | 7.10       | 710        | 6.10       | 590        | 5.00       | 420        | 3.50       |
| 300        | 1270       | 3.50       | 1160       | 3.20       | 1040       | 2.90       | 900        | 2.50       | 740        | 2.00       | 520        | 1.40       |
| 600        | 1460       | 2.10       | 1330       | 1.90       | 1190       | 1.70       | 1030       | 1.50       | 840        | 1.20       | 600        | 0.85       |
| 1000       | 1590       | 1.60       | 1450       | 1.50       | 1300       | 1.30       | 1130       | 1.10       | 920        | 0.93       | 650        | 0.66       |
| 1500       | 1640       | 1.10       | 1500       | 1.00       | 1340       | 0.93       | 1160       | 0.80       | 950        | 0.66       | 670        | 0.46       |
| 1E+04      | 2000       | 0.27       | 1830       | 0.25       | 1640       | 0.22       | 1420       | 0.19       | 1160       | 0.16       | 820        | 0.11       |
| 1E+05      | 2260       | 0.19       | 2060       | 0.18       | 1850       | 0.16       | 1600       | 0.14       | 1310       | 0.11       | 920        | 0.08       |
| 1E+06      | 2410       | 0.22       | 2200       | 0.20       | 1970       | 0.18       | 1710       | 0.16       | 1390       | 0.13       | 990        | 0.09       |

330  $\mu$ F – 20 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 11         | 9.00       | 11         | 9.00       | 11         | 9.00       | 11         | 9.00       | 9          | 7.60       | 8          | 6.30       |
| 10         | 140        | 12.00      | 140        | 12.00      | 140        | 12.00      | 140        | 12.00      | 120        | 10.20      | 100        | 8.40       |
| 50         | 790        | 11.80      | 690        | 10.80      | 590        | 9.70       | 510        | 8.40       | 450        | 6.80       | 450        | 4.80       |
| 100        | 1060       | 7.80       | 1060       | 7.10       | 1060       | 6.40       | 980        | 5.50       | 800        | 4.50       | 570        | 3.20       |
| 300        | 1720       | 3.20       | 1570       | 2.90       | 1400       | 2.60       | 1210       | 2.30       | 990        | 1.80       | 700        | 1.30       |
| 600        | 1970       | 1.90       | 1800       | 1.70       | 1610       | 1.50       | 1390       | 1.30       | 1140       | 1.10       | 800        | 0.77       |
| 1000       | 2150       | 1.70       | 1960       | 1.50       | 1750       | 1.40       | 1520       | 1.20       | 1240       | 0.98       | 880        | 0.69       |
| 1500       | 2220       | 1.40       | 2020       | 1.30       | 1810       | 1.10       | 1570       | 0.97       | 1280       | 0.79       | 910        | 0.56       |
| 1E+04      | 2700       | 0.35       | 2470       | 0.32       | 2210       | 0.29       | 1910       | 0.25       | 1560       | 0.20       | 1100       | 0.14       |
| 1E+05      | 3050       | 0.17       | 2780       | 0.16       | 2490       | 0.14       | 2160       | 0.12       | 1760       | 0.10       | 1240       | 0.07       |
| 1E+06      | 3260       | 0.24       | 2970       | 0.22       | 2660       | 0.20       | 2300       | 0.17       | 1880       | 0.14       | 1330       | 0.10       |

470  $\mu$ F – 20 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 15         | 9.00       | 15         | 9.00       | 15         | 9.00       | 15         | 9.00       | 13         | 7.60       | 11         | 6.30       |
| 10         | 200        | 12.00      | 200        | 12.00      | 200        | 12.00      | 200        | 12.00      | 170        | 10.20      | 140        | 8.40       |
| 50         | 1050       | 10.50      | 870        | 9.60       | 740        | 8.60       | 640        | 7.40       | 640        | 6.10       | 570        | 4.30       |
| 100        | 1510       | 6.90       | 1510       | 6.30       | 1430       | 5.70       | 1240       | 4.90       | 1010       | 4.00       | 720        | 2.80       |
| 300        | 2180       | 2.80       | 1990       | 2.60       | 1780       | 2.30       | 1540       | 2.00       | 1260       | 1.60       | 890        | 1.20       |
| 600        | 2490       | 1.70       | 2280       | 1.50       | 2040       | 1.40       | 1760       | 1.20       | 1440       | 0.97       | 1020       | 0.68       |
| 1000       | 2720       | 1.50       | 2490       | 1.40       | 2220       | 1.20       | 1930       | 1.10       | 1570       | 0.87       | 1110       | 0.61       |
| 1500       | 2810       | 1.20       | 2570       | 1.10       | 2290       | 1.00       | 1990       | 0.86       | 1620       | 0.70       | 1150       | 0.50       |
| 1E+04      | 3430       | 0.31       | 3130       | 0.28       | 2800       | 0.25       | 2420       | 0.22       | 1980       | 0.18       | 1400       | 0.13       |
| 1E+05      | 3860       | 0.22       | 3530       | 0.20       | 3160       | 0.18       | 2730       | 0.15       | 2230       | 0.13       | 1580       | 0.09       |
| 1E+06      | 4130       | 0.30       | 3770       | 0.27       | 3370       | 0.24       | 2920       | 0.21       | 2380       | 0.17       | 1690       | 0.12       |

10  $\mu\text{F}$  – 25 V – case size 1

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 0                      | 11.20                  | 0                      | 11.20                  | 0                      | 11.20                  | 0                      | 11.20                  | 0                      | 9.50                   | 0                      | 7.90                   |
| 10         | 5                      | 15.00                  | 5                      | 15.00                  | 5                      | 15.00                  | 5                      | 15.00                  | 5                      | 12.70                  | 4                      | 10.50                  |
| 50         | 30                     | 16.20                  | 30                     | 16.20                  | 30                     | 16.20                  | 30                     | 16.20                  | 25                     | 13.80                  | 21                     | 11.40                  |
| 100        | 70                     | 20.00                  | 70                     | 20.00                  | 70                     | 20.00                  | 70                     | 19.80                  | 58                     | 16.50                  | 43                     | 12.30                  |
| 300        | 140                    | 12.50                  | 120                    | 11.40                  | 120                    | 10.20                  | 120                    | 8.90                   | 120                    | 7.20                   | 84                     | 5.10                   |
| 600        | 240                    | 7.40                   | 210                    | 6.70                   | 190                    | 6.00                   | 170                    | 5.20                   | 140                    | 4.30                   | 96                     | 3.00                   |
| 1000       | 260                    | 5.70                   | 230                    | 5.20                   | 210                    | 4.60                   | 180                    | 4.00                   | 150                    | 3.30                   | 100                    | 2.30                   |
| 1500       | 260                    | 4.00                   | 240                    | 3.70                   | 220                    | 3.30                   | 190                    | 2.80                   | 150                    | 2.30                   | 110                    | 1.60                   |
| 1E+04      | 320                    | 0.96                   | 290                    | 0.88                   | 260                    | 0.79                   | 230                    | 0.68                   | 190                    | 0.56                   | 130                    | 0.39                   |
| 1E+05      | 360                    | 0.26                   | 330                    | 0.24                   | 300                    | 0.21                   | 260                    | 0.18                   | 210                    | 0.15                   | 150                    | 0.11                   |
| 1E+06      | 390                    | 0.28                   | 360                    | 0.25                   | 320                    | 0.22                   | 280                    | 0.19                   | 220                    | 0.16                   | 160                    | 0.11                   |

15  $\mu\text{F}$  – 25 V – case size 1

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 9.50                   | 0                      | 7.90                   |
| 10         | 8                      | 15.00                  | 8                      | 15.00                  | 8                      | 15.00                  | 8                      | 15.00                  | 7                      | 12.70                  | 6                      | 10.50                  |
| 50         | 45                     | 16.20                  | 45                     | 16.20                  | 45                     | 16.20                  | 45                     | 16.20                  | 38                     | 13.80                  | 31                     | 11.30                  |
| 100        | 110                    | 20.00                  | 110                    | 20.00                  | 110                    | 20.00                  | 91                     | 17.30                  | 75                     | 14.10                  | 60                     | 10.10                  |
| 300        | 180                    | 10.10                  | 180                    | 9.20                   | 180                    | 8.30                   | 180                    | 7.20                   | 140                    | 5.90                   | 100                    | 4.10                   |
| 600        | 290                    | 6.00                   | 260                    | 5.50                   | 230                    | 4.90                   | 200                    | 4.20                   | 160                    | 3.50                   | 120                    | 2.40                   |
| 1000       | 310                    | 4.60                   | 280                    | 4.20                   | 250                    | 3.80                   | 220                    | 3.30                   | 180                    | 2.70                   | 130                    | 1.90                   |
| 1500       | 320                    | 3.20                   | 290                    | 3.00                   | 260                    | 2.70                   | 230                    | 2.30                   | 190                    | 1.90                   | 130                    | 1.30                   |
| 1E+04      | 390                    | 0.78                   | 360                    | 0.71                   | 320                    | 0.64                   | 280                    | 0.55                   | 230                    | 0.45                   | 160                    | 0.32                   |
| 1E+05      | 440                    | 0.31                   | 400                    | 0.29                   | 360                    | 0.26                   | 310                    | 0.22                   | 260                    | 0.18                   | 180                    | 0.13                   |
| 1E+06      | 470                    | 0.33                   | 430                    | 0.31                   | 390                    | 0.27                   | 330                    | 0.24                   | 270                    | 0.19                   | 190                    | 0.14                   |

22  $\mu\text{F}$  – 25 V – case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 11.20                  | 1                      | 9.50                   | 1                      | 7.90                   |
| 10         | 12                     | 15.00                  | 12                     | 15.00                  | 12                     | 15.00                  | 12                     | 15.00                  | 10                     | 12.70                  | 8                      | 10.50                  |
| 50         | 66                     | 16.20                  | 66                     | 16.20                  | 66                     | 16.20                  | 66                     | 16.20                  | 56                     | 13.80                  | 46                     | 11.30                  |
| 100        | 150                    | 20.00                  | 150                    | 20.00                  | 140                    | 18.50                  | 120                    | 16.00                  | 100                    | 13.10                  | 88                     | 9.30                   |
| 300        | 270                    | 9.30                   | 270                    | 8.50                   | 270                    | 7.60                   | 240                    | 6.60                   | 190                    | 5.40                   | 140                    | 3.80                   |
| 600        | 390                    | 5.50                   | 350                    | 5.00                   | 320                    | 4.50                   | 270                    | 3.90                   | 220                    | 3.20                   | 160                    | 2.20                   |
| 1000       | 420                    | 4.20                   | 380                    | 3.90                   | 340                    | 3.50                   | 300                    | 3.00                   | 240                    | 2.50                   | 170                    | 1.70                   |
| 1500       | 430                    | 3.00                   | 400                    | 2.70                   | 360                    | 2.40                   | 310                    | 2.10                   | 250                    | 1.70                   | 180                    | 1.20                   |
| 1E+04      | 530                    | 0.72                   | 480                    | 0.66                   | 430                    | 0.59                   | 370                    | 0.51                   | 310                    | 0.42                   | 220                    | 0.29                   |
| 1E+05      | 600                    | 0.21                   | 550                    | 0.19                   | 490                    | 0.17                   | 420                    | 0.15                   | 350                    | 0.12                   | 240                    | 0.09                   |
| 1E+06      | 640                    | 0.23                   | 580                    | 0.21                   | 520                    | 0.18                   | 450                    | 0.16                   | 370                    | 0.13                   | 260                    | 0.09                   |

33  $\mu$ F — 25 V — case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 11.20      | 1          | 11.20      | 1          | 11.20      | 1          | 11.20      | 1          | 9.50       | 1          | 7.90       |
| 10         | 18         | 15.00      | 18         | 15.00      | 18         | 15.00      | 18         | 15.00      | 15         | 12.70      | 13         | 10.50      |
| 50         | 99         | 16.20      | 99         | 16.20      | 99         | 16.20      | 99         | 16.20      | 83         | 13.60      | 67         | 11.00      |
| 100        | 230        | 18.90      | 210        | 17.30      | 180        | 15.40      | 150        | 13.30      | 130        | 10.90      | 130        | 7.70       |
| 300        | 400        | 7.70       | 380        | 7.10       | 340        | 6.30       | 300        | 5.50       | 240        | 4.50       | 170        | 3.20       |
| 600        | 480        | 4.60       | 440        | 4.20       | 390        | 3.70       | 340        | 3.20       | 280        | 2.60       | 200        | 1.90       |
| 1000       | 520        | 3.50       | 480        | 3.20       | 430        | 2.90       | 370        | 2.50       | 300        | 2.00       | 210        | 1.40       |
| 1500       | 540        | 2.50       | 490        | 2.30       | 440        | 2.00       | 380        | 1.80       | 310        | 1.40       | 220        | 1.00       |
| 1E+04      | 660        | 0.60       | 600        | 0.54       | 540        | 0.49       | 470        | 0.42       | 380        | 0.34       | 270        | 0.24       |
| 1E+05      | 740        | 0.26       | 680        | 0.24       | 610        | 0.21       | 530        | 0.19       | 430        | 0.15       | 300        | 0.11       |
| 1E+06      | 790        | 0.28       | 730        | 0.26       | 650        | 0.23       | 560        | 0.20       | 460        | 0.16       | 320        | 0.11       |

47  $\mu$ F — 25 V — case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 2          | 11.20      | 2          | 11.20      | 2          | 11.20      | 2          | 11.20      | 2          | 9.50       | 1          | 7.90       |
| 10         | 26         | 15.00      | 26         | 15.00      | 26         | 15.00      | 26         | 15.00      | 22         | 12.70      | 18         | 10.50      |
| 50         | 140        | 16.20      | 140        | 16.20      | 140        | 16.20      | 140        | 16.00      | 110        | 13.20      | 84         | 9.70       |
| 100        | 300        | 15.80      | 250        | 14.50      | 210        | 12.90      | 190        | 11.20      | 190        | 9.10       | 160        | 6.50       |
| 300        | 500        | 6.50       | 460        | 5.90       | 410        | 5.30       | 350        | 4.60       | 290        | 3.70       | 200        | 2.60       |
| 600        | 570        | 3.80       | 520        | 3.50       | 470        | 3.10       | 410        | 2.70       | 330        | 2.20       | 230        | 1.60       |
| 1000       | 630        | 2.90       | 570        | 2.70       | 510        | 2.40       | 440        | 2.10       | 360        | 1.70       | 260        | 1.20       |
| 1500       | 650        | 2.10       | 590        | 1.90       | 530        | 1.70       | 460        | 1.50       | 370        | 1.20       | 260        | 0.85       |
| 1E+04      | 790        | 0.50       | 720        | 0.46       | 640        | 0.41       | 560        | 0.35       | 450        | 0.29       | 320        | 0.20       |
| 1E+05      | 890        | 0.31       | 810        | 0.29       | 720        | 0.26       | 630        | 0.22       | 510        | 0.18       | 360        | 0.13       |
| 1E+06      | 950        | 0.34       | 870        | 0.31       | 770        | 0.27       | 670        | 0.24       | 550        | 0.19       | 390        | 0.14       |

68  $\mu$ F — 25 V — case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 3          | 11.20      | 3          | 11.20      | 3          | 11.20      | 3          | 11.20      | 2          | 9.50       | 2          | 7.90       |
| 10         | 37         | 15.00      | 37         | 15.00      | 37         | 15.00      | 37         | 15.00      | 31         | 12.70      | 26         | 10.50      |
| 50         | 200        | 16.20      | 200        | 16.20      | 200        | 16.20      | 200        | 15.60      | 160        | 12.80      | 120        | 9.30       |
| 100        | 410        | 15.00      | 340        | 13.70      | 290        | 12.20      | 270        | 10.60      | 270        | 8.70       | 230        | 6.10       |
| 300        | 680        | 6.10       | 620        | 5.60       | 560        | 5.00       | 480        | 4.30       | 390        | 3.50       | 280        | 2.50       |
| 600        | 780        | 3.60       | 720        | 3.30       | 640        | 3.00       | 550        | 2.60       | 450        | 2.10       | 320        | 1.50       |
| 1000       | 860        | 2.80       | 780        | 2.50       | 700        | 2.30       | 600        | 2.00       | 490        | 1.60       | 350        | 1.10       |
| 1500       | 880        | 2.00       | 810        | 1.80       | 720        | 1.60       | 620        | 1.40       | 510        | 1.10       | 360        | 0.80       |
| 1E+04      | 1080       | 0.47       | 980        | 0.43       | 880        | 0.39       | 760        | 0.33       | 620        | 0.27       | 440        | 0.19       |
| 1E+05      | 1210       | 0.17       | 1110       | 0.16       | 990        | 0.14       | 860        | 0.12       | 700        | 0.10       | 500        | 0.07       |
| 1E+06      | 1300       | 0.19       | 1180       | 0.17       | 1060       | 0.15       | 920        | 0.13       | 750        | 0.11       | 530        | 0.08       |



100  $\mu\text{F}$  - 25 V - case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 4          | 11.20      | 4          | 11.20      | 4          | 11.20      | 4          | 11.20      | 3          | 9.50       | 3          | 7.90       |
| 10         | 54         | 15.00      | 54         | 15.00      | 54         | 15.00      | 54         | 15.00      | 46         | 12.70      | 38         | 10.50      |
| 50         | 300        | 16.20      | 300        | 16.00      | 260        | 14.30      | 230        | 12.40      | 190        | 10.10      | 170        | 7.20       |
| 100        | 410        | 11.60      | 400        | 10.60      | 400        | 9.40       | 400        | 8.20       | 360        | 6.70       | 250        | 4.70       |
| 300        | 770        | 4.70       | 710        | 4.30       | 630        | 3.90       | 550        | 3.30       | 450        | 2.70       | 320        | 1.90       |
| 600        | 890        | 2.80       | 810        | 2.50       | 720        | 2.30       | 630        | 2.00       | 510        | 1.60       | 360        | 1.10       |
| 1000       | 970        | 2.20       | 880        | 2.00       | 790        | 1.80       | 680        | 1.50       | 560        | 1.20       | 400        | 0.88       |
| 1500       | 1000       | 1.50       | 910        | 1.40       | 820        | 1.20       | 710        | 1.10       | 580        | 0.88       | 410        | 0.62       |
| 1E+04      | 1220       | 0.36       | 1110       | 0.33       | 990        | 0.30       | 860        | 0.26       | 700        | 0.21       | 500        | 0.15       |
| 1E+05      | 1370       | 0.19       | 1250       | 0.18       | 1120       | 0.16       | 970        | 0.14       | 790        | 0.11       | 560        | 0.08       |
| 1E+06      | 1470       | 0.21       | 1340       | 0.19       | 1200       | 0.17       | 1040       | 0.15       | 850        | 0.12       | 600        | 0.09       |

150  $\mu\text{F}$  - 25 V - case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 6          | 11.20      | 6          | 11.20      | 6          | 11.20      | 6          | 11.20      | 5          | 9.50       | 4          | 7.90       |
| 10         | 81         | 15.00      | 81         | 15.00      | 81         | 15.00      | 81         | 15.00      | 69         | 12.70      | 57         | 10.50      |
| 50         | 450        | 16.20      | 420        | 14.90      | 370        | 13.30      | 320        | 11.50      | 260        | 9.40       | 260        | 6.70       |
| 100        | 600        | 10.70      | 600        | 9.80       | 600        | 8.80       | 600        | 7.60       | 500        | 6.20       | 350        | 4.40       |
| 300        | 1080       | 4.40       | 980        | 4.00       | 880        | 3.60       | 760        | 3.10       | 620        | 2.50       | 440        | 1.80       |
| 600        | 1230       | 2.60       | 1130       | 2.40       | 1010       | 2.10       | 870        | 1.80       | 710        | 1.50       | 500        | 1.10       |
| 1000       | 1350       | 2.00       | 1230       | 1.80       | 1100       | 1.60       | 950        | 1.40       | 780        | 1.20       | 550        | 0.81       |
| 1500       | 1390       | 1.40       | 1270       | 1.30       | 1130       | 1.10       | 980        | 0.99       | 800        | 0.81       | 570        | 0.57       |
| 1E+04      | 1690       | 0.34       | 1550       | 0.31       | 1380       | 0.28       | 1200       | 0.24       | 980        | 0.19       | 690        | 0.14       |
| 1E+05      | 1910       | 0.22       | 1740       | 0.20       | 1560       | 0.18       | 1350       | 0.15       | 1100       | 0.12       | 780        | 0.09       |
| 1E+06      | 2040       | 0.24       | 1860       | 0.22       | 1670       | 0.20       | 1440       | 0.17       | 1180       | 0.14       | 830        | 0.10       |

220  $\mu\text{F}$  - 25 V - case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 9          | 11.20      | 9          | 11.20      | 9          | 11.20      | 9          | 11.20      | 8          | 9.50       | 6          | 7.90       |
| 10         | 120        | 15.00      | 120        | 15.00      | 120        | 15.00      | 120        | 15.00      | 100        | 12.70      | 84         | 10.50      |
| 50         | 660        | 14.50      | 570        | 13.20      | 480        | 11.80      | 420        | 10.20      | 380        | 8.40       | 370        | 5.90       |
| 100        | 880        | 9.50       | 880        | 8.70       | 880        | 7.80       | 800        | 6.70       | 650        | 5.50       | 460        | 3.90       |
| 300        | 1400       | 3.90       | 1280       | 3.60       | 1150       | 3.20       | 990        | 2.80       | 810        | 2.30       | 570        | 1.60       |
| 600        | 1610       | 2.30       | 1470       | 2.10       | 1310       | 1.90       | 1140       | 1.60       | 930        | 1.30       | 660        | 0.94       |
| 1000       | 1750       | 2.10       | 1600       | 1.90       | 1430       | 1.70       | 1240       | 1.50       | 1010       | 1.20       | 720        | 0.84       |
| 1500       | 1810       | 1.70       | 1650       | 1.50       | 1480       | 1.40       | 1280       | 1.20       | 1050       | 0.97       | 740        | 0.68       |
| 1E+04      | 2210       | 0.43       | 2010       | 0.39       | 1800       | 0.35       | 1560       | 0.30       | 1270       | 0.25       | 900        | 0.18       |
| 1E+05      | 2490       | 0.21       | 2270       | 0.19       | 2030       | 0.17       | 1760       | 0.15       | 1440       | 0.12       | 1020       | 0.09       |
| 1E+06      | 2660       | 0.26       | 2430       | 0.24       | 2170       | 0.21       | 1880       | 0.18       | 1540       | 0.15       | 1090       | 0.11       |

330  $\mu$ F – 25 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 13         | 11.20      | 13         | 11.20      | 13         | 11.20      | 13         | 11.20      | 11         | 9.50       | 9          | 7.90       |
| 10         | 180        | 15.00      | 180        | 15.00      | 180        | 15.00      | 180        | 15.00      | 150        | 12.70      | 120        | 10.50      |
| 50         | 870        | 12.50      | 720        | 11.50      | 620        | 10.20      | 570        | 8.90       | 570        | 7.20       | 480        | 5.10       |
| 100        | 1320       | 8.30       | 1320       | 7.50       | 1200       | 6.70       | 1040       | 5.80       | 850        | 4.80       | 600        | 3.40       |
| 300        | 1820       | 3.40       | 1660       | 3.10       | 1490       | 2.80       | 1290       | 2.40       | 1050       | 2.00       | 740        | 1.40       |
| 600        | 2090       | 2.00       | 1910       | 1.80       | 1700       | 1.60       | 1480       | 1.40       | 1200       | 1.20       | 850        | 0.81       |
| 1000       | 2280       | 1.80       | 2080       | 1.60       | 1860       | 1.50       | 1610       | 1.30       | 1320       | 1.00       | 930        | 0.73       |
| 1500       | 2350       | 1.50       | 2150       | 1.30       | 1920       | 1.20       | 1660       | 1.00       | 1360       | 0.84       | 960        | 0.59       |
| 1E+04      | 2870       | 0.37       | 2620       | 0.34       | 2340       | 0.30       | 2030       | 0.26       | 1650       | 0.21       | 1170       | 0.15       |
| 1E+05      | 3230       | 0.18       | 2950       | 0.17       | 2640       | 0.15       | 2290       | 0.13       | 1870       | 0.11       | 1320       | 0.07       |
| 1E+06      | 3450       | 0.25       | 3150       | 0.23       | 2820       | 0.20       | 2440       | 0.18       | 1990       | 0.14       | 1410       | 0.10       |

2,2  $\mu$ F – 35 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 8.40       | 0          | 6.90       |
| 10         | 1          | 13.20      | 1          | 13.20      | 1          | 13.20      | 1          | 13.20      | 1          | 11.20      | 1          | 9.30       |
| 50         | 6          | 14.30      | 6          | 14.30      | 6          | 14.30      | 6          | 14.30      | 5          | 12.10      | 4          | 10.00      |
| 100        | 14         | 17.60      | 14         | 17.60      | 14         | 17.60      | 14         | 17.60      | 12         | 14.90      | 10         | 12.40      |
| 300        | 41         | 17.60      | 41         | 17.60      | 39         | 16.50      | 34         | 14.30      | 27         | 11.60      | 24         | 8.30       |
| 600        | 60         | 12.00      | 50         | 10.90      | 46         | 9.80       | 46         | 8.50       | 46         | 6.90       | 34         | 4.90       |
| 1000       | 65         | 9.20       | 65         | 8.40       | 65         | 7.50       | 65         | 6.50       | 53         | 5.30       | 38         | 3.80       |
| 1500       | 95         | 6.50       | 87         | 6.00       | 78         | 5.30       | 67         | 4.60       | 55         | 3.80       | 39         | 2.70       |
| 1E+04      | 120        | 1.60       | 110        | 1.40       | 95         | 1.30       | 82         | 1.10       | 67         | 0.90       | 47         | 0.64       |
| 1E+05      | 130        | 0.14       | 120        | 0.13       | 110        | 0.11       | 92         | 0.10       | 75         | 0.08       | 53         | 0.06       |
| 1E+06      | 140        | 0.15       | 130        | 0.14       | 110        | 0.12       | 99         | 0.10       | 81         | 0.09       | 57         | 0.06       |

3,3  $\mu$ F – 35 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 8.40       | 0          | 6.90       |
| 10         | 2          | 13.20      | 2          | 13.20      | 2          | 13.20      | 2          | 13.20      | 1          | 11.20      | 1          | 9.30       |
| 50         | 9          | 14.30      | 9          | 14.30      | 9          | 14.30      | 9          | 14.30      | 7          | 12.10      | 6          | 10.00      |
| 100        | 21         | 17.60      | 21         | 17.60      | 21         | 17.60      | 21         | 17.60      | 17         | 14.90      | 14         | 12.30      |
| 300        | 62         | 16.60      | 56         | 15.10      | 48         | 13.50      | 41         | 11.70      | 36         | 9.60       | 36         | 6.80       |
| 600        | 69         | 9.80       | 69         | 8.90       | 69         | 8.00       | 69         | 6.90       | 59         | 5.60       | 42         | 4.00       |
| 1000       | 98         | 7.50       | 98         | 6.90       | 92         | 6.10       | 79         | 5.30       | 65         | 4.30       | 46         | 3.10       |
| 1500       | 120        | 5.30       | 110        | 4.80       | 95         | 4.30       | 82         | 3.80       | 67         | 3.10       | 47         | 2.20       |
| 1E+04      | 140        | 1.30       | 130        | 1.20       | 120        | 1.00       | 100        | 0.90       | 82         | 0.74       | 58         | 0.52       |
| 1E+05      | 160        | 0.17       | 150        | 0.15       | 130        | 0.14       | 110        | 0.12       | 92         | 0.10       | 65         | 0.07       |
| 1E+06      | 170        | 0.18       | 160        | 0.17       | 140        | 0.15       | 120        | 0.13       | 98         | 0.10       | 70         | 0.07       |

4,7  $\mu\text{F}$  – 35 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 8.40       | 0          | 6.90       |
| 10         | 2          | 13.20      | 2          | 13.20      | 2          | 13.20      | 2          | 13.20      | 2          | 11.20      | 2          | 9.30       |
| 50         | 13         | 14.30      | 13         | 14.30      | 13         | 14.30      | 13         | 14.30      | 11         | 12.10      | 9          | 10.00      |
| 100        | 29         | 17.60      | 29         | 17.60      | 29         | 17.60      | 29         | 17.60      | 25         | 14.90      | 20         | 12.20      |
| 300        | 80         | 13.90      | 67         | 12.70      | 57         | 11.30      | 51         | 9.80       | 51         | 8.00       | 44         | 5.70       |
| 600        | 98         | 8.20       | 98         | 7.50       | 98         | 6.70       | 87         | 5.80       | 71         | 4.70       | 50         | 3.40       |
| 1000       | 130        | 6.30       | 120        | 5.80       | 110        | 5.20       | 95         | 4.50       | 78         | 3.70       | 55         | 2.60       |
| 1500       | 140        | 4.50       | 130        | 4.10       | 110        | 3.60       | 98         | 3.20       | 80         | 2.60       | 57         | 1.80       |
| 1E+04      | 170        | 1.10       | 150        | 0.98       | 140        | 0.87       | 120        | 0.76       | 98         | 0.62       | 69         | 0.44       |
| 1E+05      | 190        | 0.20       | 170        | 0.18       | 160        | 0.17       | 130        | 0.14       | 110        | 0.12       | 78         | 0.08       |
| 1E+06      | 200        | 0.22       | 190        | 0.20       | 170        | 0.18       | 140        | 0.15       | 120        | 0.12       | 83         | 0.09       |

6,8  $\mu\text{F}$  – 35 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 8.40       | 0          | 6.90       |
| 10         | 3          | 13.20      | 3          | 13.20      | 3          | 13.20      | 3          | 13.20      | 3          | 11.20      | 2          | 9.30       |
| 50         | 18         | 14.30      | 18         | 14.30      | 18         | 14.30      | 18         | 14.30      | 15         | 12.10      | 13         | 10.00      |
| 100        | 42         | 17.60      | 42         | 17.60      | 42         | 17.60      | 42         | 17.60      | 35         | 14.70      | 27         | 11.30      |
| 300        | 89         | 11.60      | 77         | 10.60      | 73         | 9.50       | 73         | 8.20       | 73         | 6.70       | 53         | 4.70       |
| 600        | 140        | 6.80       | 140        | 6.30       | 120        | 5.60       | 110        | 4.80       | 86         | 4.00       | 61         | 2.80       |
| 1000       | 160        | 5.30       | 150        | 4.80       | 130        | 4.30       | 110        | 3.70       | 94         | 3.00       | 66         | 2.20       |
| 1500       | 170        | 3.70       | 150        | 3.40       | 140        | 3.00       | 120        | 2.60       | 97         | 2.10       | 68         | 1.50       |
| 1E+04      | 200        | 0.89       | 190        | 0.82       | 170        | 0.73       | 140        | 0.63       | 120        | 0.52       | 83         | 0.36       |
| 1E+05      | 230        | 0.24       | 210        | 0.22       | 190        | 0.20       | 160        | 0.17       | 130        | 0.14       | 94         | 0.10       |
| 1E+06      | 250        | 0.26       | 220        | 0.24       | 200        | 0.21       | 170        | 0.18       | 140        | 0.15       | 100        | 0.11       |

10  $\mu\text{F}$  – 35 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 9.90       | 0          | 8.40       | 0          | 6.90       |
| 10         | 5          | 13.20      | 5          | 13.20      | 5          | 13.20      | 5          | 13.20      | 4          | 11.20      | 3          | 9.30       |
| 50         | 27         | 14.30      | 27         | 14.30      | 27         | 14.30      | 27         | 14.30      | 23         | 12.10      | 19         | 10.00      |
| 100        | 62         | 17.60      | 62         | 17.60      | 62         | 17.60      | 61         | 17.30      | 51         | 14.30      | 37         | 10.50      |
| 300        | 110        | 10.70      | 110        | 9.70       | 110        | 8.70       | 110        | 7.50       | 100        | 6.20       | 72         | 4.40       |
| 600        | 200        | 6.30       | 180        | 5.70       | 160        | 5.10       | 140        | 4.40       | 120        | 3.60       | 82         | 2.60       |
| 1000       | 220        | 4.80       | 200        | 4.40       | 180        | 4.00       | 160        | 3.40       | 130        | 2.80       | 89         | 2.00       |
| 1500       | 230        | 3.40       | 210        | 3.10       | 180        | 2.80       | 160        | 2.40       | 130        | 2.00       | 92         | 1.40       |
| 1E+04      | 280        | 0.82       | 250        | 0.75       | 230        | 0.67       | 200        | 0.58       | 160        | 0.47       | 110        | 0.34       |
| 1E+05      | 310        | 0.11       | 280        | 0.10       | 250        | 0.09       | 220        | 0.08       | 180        | 0.06       | 130        | 0.04       |
| 1E+06      | 330        | 0.12       | 300        | 0.11       | 270        | 0.10       | 230        | 0.08       | 190        | 0.07       | 140        | 0.05       |

15  $\mu$ F – 35 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 8.40       | 0          | 6.90       |
| 10         | 7          | 13.20      | 7          | 13.20      | 7          | 13.20      | 7          | 13.20      | 6          | 11.20      | 5          | 9.30       |
| 50         | 40         | 14.30      | 40         | 14.30      | 40         | 14.30      | 40         | 14.30      | 34         | 12.10      | 28         | 10.00      |
| 100        | 93         | 17.60      | 93         | 17.60      | 91         | 17.20      | 79         | 14.90      | 64         | 12.20      | 53         | 8.70       |
| 300        | 160        | 8.70       | 160        | 7.90       | 160        | 7.10       | 150        | 6.20       | 120        | 5.00       | 88         | 3.60       |
| 600        | 250        | 5.10       | 220        | 4.70       | 200        | 4.20       | 170        | 3.60       | 140        | 3.00       | 100        | 2.10       |
| 1000       | 270        | 4.00       | 250        | 3.60       | 220        | 3.20       | 190        | 2.80       | 160        | 2.30       | 110        | 1.60       |
| 1500       | 280        | 2.80       | 250        | 2.50       | 230        | 2.30       | 200        | 2.00       | 160        | 1.60       | 110        | 1.10       |
| 1E+04      | 340        | 0.67       | 310        | 0.61       | 280        | 0.55       | 240        | 0.47       | 200        | 0.39       | 140        | 0.27       |
| 1E+05      | 380        | 0.13       | 350        | 0.12       | 310        | 0.11       | 270        | 0.10       | 220        | 0.08       | 160        | 0.05       |
| 1E+06      | 410        | 0.14       | 370        | 0.13       | 330        | 0.12       | 290        | 0.10       | 230        | 0.08       | 170        | 0.06       |

22  $\mu$ F – 35 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 8.40       | 1          | 6.90       |
| 10         | 11         | 13.20      | 11         | 13.20      | 11         | 13.20      | 11         | 13.20      | 9          | 11.20      | 7          | 9.30       |
| 50         | 59         | 14.30      | 59         | 14.30      | 59         | 14.30      | 59         | 14.30      | 49         | 12.10      | 40         | 9.80       |
| 100        | 140        | 17.50      | 130        | 16.00      | 110        | 14.30      | 96         | 12.40      | 78         | 10.10      | 78         | 7.10       |
| 300        | 240        | 7.20       | 240        | 6.50       | 210        | 5.80       | 180        | 5.10       | 150        | 4.10       | 110        | 2.90       |
| 600        | 300        | 4.20       | 270        | 3.90       | 240        | 3.40       | 210        | 3.00       | 170        | 2.40       | 120        | 1.70       |
| 1000       | 320        | 3.30       | 300        | 3.00       | 260        | 2.70       | 230        | 2.30       | 190        | 1.90       | 130        | 1.30       |
| 1500       | 330        | 2.30       | 310        | 2.10       | 270        | 1.90       | 240        | 1.60       | 190        | 1.30       | 140        | 0.94       |
| 1E+04      | 410        | 0.55       | 370        | 0.50       | 330        | 0.45       | 290        | 0.39       | 240        | 0.32       | 170        | 0.22       |
| 1E+05      | 460        | 0.16       | 420        | 0.15       | 380        | 0.13       | 320        | 0.11       | 270        | 0.09       | 190        | 0.07       |
| 1E+06      | 490        | 0.17       | 450        | 0.16       | 400        | 0.14       | 350        | 0.12       | 280        | 0.10       | 200        | 0.07       |

33  $\mu$ F – 35 V – case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 9.90       | 1          | 8.40       | 1          | 6.90       |
| 10         | 16         | 13.20      | 16         | 13.20      | 16         | 13.20      | 16         | 13.20      | 13         | 11.20      | 11         | 9.30       |
| 50         | 88         | 14.30      | 88         | 14.30      | 88         | 14.30      | 88         | 14.30      | 74         | 12.00      | 59         | 9.60       |
| 100        | 210        | 16.40      | 180        | 15.00      | 160        | 13.40      | 130        | 11.60      | 120        | 9.50       | 120        | 6.70       |
| 300        | 360        | 6.70       | 330        | 6.10       | 300        | 5.50       | 260        | 4.80       | 210        | 3.90       | 150        | 2.70       |
| 600        | 420        | 4.00       | 380        | 3.60       | 340        | 3.20       | 300        | 2.80       | 240        | 2.30       | 170        | 1.60       |
| 1000       | 460        | 3.10       | 420        | 2.80       | 370        | 2.50       | 320        | 2.20       | 260        | 1.80       | 190        | 1.20       |
| 1500       | 470        | 2.20       | 430        | 2.00       | 380        | 1.80       | 330        | 1.50       | 270        | 1.20       | 190        | 0.88       |
| 1E+04      | 570        | 0.52       | 520        | 0.47       | 470        | 0.42       | 410        | 0.37       | 330        | 0.30       | 230        | 0.21       |
| 1E+05      | 650        | 0.09       | 590        | 0.08       | 530        | 0.07       | 460        | 0.06       | 370        | 0.05       | 260        | 0.04       |
| 1E+06      | 690        | 0.10       | 630        | 0.09       | 560        | 0.08       | 490        | 0.07       | 400        | 0.06       | 280        | 0.04       |

47  $\mu\text{F}$  - 35 V - case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 2          | 9.90       | 2          | 9.90       | 2          | 9.90       | 2          | 9.90       | 1          | 8.40       | 1          | 6.90       |
| 10         | 23         | 13.20      | 23         | 13.20      | 23         | 13.20      | 23         | 13.20      | 19         | 11.20      | 16         | 9.30       |
| 50         | 130        | 14.30      | 130        | 14.30      | 130        | 14.30      | 120        | 14.00      | 100        | 11.50      | 73         | 8.40       |
| 100        | 260        | 13.70      | 220        | 12.50      | 190        | 11.20      | 170        | 9.70       | 170        | 7.90       | 140        | 5.60       |
| 300        | 430        | 5.60       | 400        | 5.10       | 350        | 4.60       | 310        | 4.00       | 250        | 3.20       | 180        | 2.30       |
| 600        | 500        | 3.30       | 450        | 3.00       | 410        | 2.70       | 350        | 2.30       | 290        | 1.90       | 200        | 1.40       |
| 1000       | 540        | 2.50       | 490        | 2.30       | 440        | 2.10       | 380        | 1.80       | 310        | 1.50       | 220        | 1.00       |
| 1500       | 560        | 1.80       | 510        | 1.60       | 460        | 1.50       | 400        | 1.30       | 320        | 1.00       | 230        | 0.73       |
| 1E+04      | 680        | 0.43       | 620        | 0.39       | 560        | 0.35       | 480        | 0.31       | 390        | 0.25       | 280        | 0.18       |
| 1E+05      | 770        | 0.11       | 700        | 0.10       | 630        | 0.09       | 540        | 0.08       | 440        | 0.06       | 310        | 0.04       |
| 1E+06      | 820        | 0.12       | 750        | 0.11       | 670        | 0.10       | 580        | 0.08       | 470        | 0.07       | 340        | 0.05       |

68  $\mu\text{F}$  - 35 V - case size 5

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 2          | 9.90       | 2          | 9.90       | 2          | 9.90       | 2          | 9.90       | 2          | 8.40       | 2          | 6.90       |
| 10         | 33         | 13.20      | 33         | 13.20      | 33         | 13.20      | 33         | 13.20      | 28         | 11.20      | 23         | 9.30       |
| 50         | 180        | 14.30      | 180        | 14.30      | 170        | 13.80      | 150        | 11.90      | 120        | 9.70       | 100        | 6.90       |
| 100        | 270        | 11.20      | 240        | 10.20      | 240        | 9.10       | 240        | 7.90       | 240        | 6.50       | 170        | 4.60       |
| 300        | 510        | 4.60       | 460        | 4.20       | 420        | 3.70       | 360        | 3.20       | 290        | 2.60       | 210        | 1.90       |
| 600        | 580        | 2.70       | 530        | 2.50       | 480        | 2.20       | 410        | 1.90       | 340        | 1.60       | 240        | 1.10       |
| 1000       | 640        | 2.10       | 580        | 1.90       | 520        | 1.70       | 450        | 1.50       | 370        | 1.20       | 260        | 0.85       |
| 1500       | 660        | 1.50       | 600        | 1.30       | 540        | 1.20       | 460        | 1.00       | 380        | 0.85       | 270        | 0.60       |
| 1E+04      | 800        | 0.35       | 730        | 0.32       | 650        | 0.29       | 570        | 0.25       | 460        | 0.20       | 330        | 0.14       |
| 1E+05      | 900        | 0.09       | 820        | 0.08       | 740        | 0.07       | 640        | 0.06       | 520        | 0.05       | 370        | 0.04       |
| 1E+06      | 960        | 0.10       | 880        | 0.09       | 790        | 0.08       | 680        | 0.07       | 560        | 0.06       | 390        | 0.04       |

100  $\mu\text{F}$  - 35 V - case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 4          | 9.90       | 4          | 9.90       | 4          | 9.90       | 4          | 9.90       | 3          | 8.40       | 3          | 6.90       |
| 10         | 48         | 13.20      | 48         | 13.20      | 48         | 13.20      | 48         | 13.20      | 41         | 11.20      | 34         | 9.30       |
| 50         | 260        | 14.30      | 260        | 14.00      | 230        | 12.50      | 200        | 10.80      | 160        | 9.90       | 150        | 6.30       |
| 100        | 360        | 10.10      | 350        | 9.30       | 350        | 8.30       | 350        | 7.20       | 320        | 5.90       | 220        | 4.10       |
| 300        | 680        | 4.20       | 620        | 3.80       | 550        | 3.40       | 480        | 2.90       | 390        | 2.40       | 280        | 1.70       |
| 600        | 780        | 2.40       | 710        | 2.20       | 640        | 2.00       | 550        | 1.70       | 450        | 1.40       | 320        | 1.00       |
| 1000       | 850        | 2.20       | 780        | 2.00       | 690        | 1.80       | 600        | 1.60       | 490        | 1.30       | 350        | 0.90       |
| 1500       | 880        | 1.80       | 800        | 1.60       | 720        | 1.50       | 620        | 1.30       | 510        | 1.00       | 360        | 0.73       |
| 1E+04      | 1070       | 0.46       | 970        | 0.42       | 870        | 0.37       | 760        | 0.32       | 620        | 0.26       | 440        | 0.19       |
| 1E+05      | 1200       | 0.10       | 1100       | 0.09       | 980        | 0.08       | 850        | 0.07       | 700        | 0.06       | 490        | 0.04       |
| 1E+06      | 1290       | 0.13       | 1180       | 0.12       | 1050       | 0.10       | 910        | 0.09       | 740        | 0.07       | 530        | 0.05       |

150  $\mu$ F – 35 V – case size 6

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 5          | 9.90       | 5          | 9.90       | 5          | 9.90       | 5          | 9.90       | 5          | 8.40       | 4          | 6.90       |
| 10         | 72         | 13.20      | 72         | 13.20      | 72         | 13.20      | 72         | 13.20      | 61         | 11.20      | 50         | 9.30       |
| 50         | 400        | 13.50      | 360        | 12.30      | 300        | 11.00      | 260        | 9.50       | 230        | 7.80       | 230        | 5.50       |
| 100        | 530        | 8.90       | 530        | 8.10       | 530        | 7.20       | 510        | 6.30       | 410        | 5.10       | 290        | 3.60       |
| 300        | 890        | 3.60       | 810        | 3.30       | 730        | 3.00       | 630        | 2.60       | 510        | 2.10       | 360        | 1.50       |
| 600        | 1020       | 2.10       | 930        | 2.00       | 830        | 1.70       | 720        | 1.50       | 590        | 1.20       | 420        | 0.87       |
| 1000       | 1110       | 1.90       | 1010       | 1.80       | 910        | 1.60       | 790        | 1.40       | 640        | 1.10       | 450        | 0.78       |
| 1500       | 1150       | 1.60       | 1050       | 1.40       | 940        | 1.30       | 810        | 1.10       | 660        | 0.90       | 470        | 0.64       |
| 1E+04      | 1400       | 0.40       | 1280       | 0.36       | 1140       | 0.33       | 990        | 0.28       | 810        | 0.23       | 570        | 0.16       |
| 1E+05      | 1580       | 0.13       | 1440       | 0.12       | 1290       | 0.11       | 1120       | 0.09       | 910        | 0.08       | 640        | 0.05       |
| 1E+06      | 1690       | 0.16       | 1540       | 0.15       | 1380       | 0.13       | 1190       | 0.11       | 970        | 0.09       | 690        | 0.07       |

2,2  $\mu$ F – 40 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 11.30      | 0          | 11.30      | 0          | 11.30      | 0          | 11.30      | 0          | 9.60       | 0          | 7.90       |
| 10         | 1          | 15.10      | 1          | 15.10      | 1          | 15.10      | 1          | 15.10      | 1          | 12.80      | 1          | 10.60      |
| 50         | 7          | 16.40      | 7          | 16.40      | 7          | 16.40      | 7          | 16.40      | 6          | 13.90      | 5          | 11.50      |
| 100        | 16         | 20.20      | 16         | 20.20      | 16         | 20.20      | 16         | 20.20      | 13         | 17.10      | 11         | 14.10      |
| 300        | 47         | 20.20      | 44         | 18.60      | 39         | 16.50      | 34         | 14.30      | 28         | 11.70      | 27         | 8.30       |
| 600        | 55         | 12.00      | 53         | 11.00      | 53         | 9.80       | 53         | 8.50       | 49         | 6.90       | 34         | 4.90       |
| 1000       | 75         | 9.20       | 75         | 8.40       | 75         | 7.50       | 65         | 6.50       | 53         | 5.30       | 38         | 3.80       |
| 1500       | 95         | 6.50       | 87         | 6.00       | 78         | 5.30       | 67         | 4.60       | 55         | 3.80       | 39         | 2.70       |
| 1E+04      | 120        | 1.60       | 110        | 1.40       | 95         | 1.30       | 82         | 1.10       | 67         | 0.90       | 47         | 0.64       |
| 1E+05      | 130        | 0.14       | 120        | 0.13       | 110        | 0.11       | 92         | 0.10       | 75         | 0.08       | 53         | 0.06       |
| 1E+06      | 140        | 0.15       | 130        | 0.14       | 110        | 0.12       | 99         | 0.10       | 81         | 0.09       | 57         | 0.06       |

3,3  $\mu$ F – 40 V – case size 1

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 0          | 11.30      | 0          | 11.30      | 0          | 11.30      | 0          | 11.30      | 0          | 9.60       | 0          | 7.90       |
| 10         | 2          | 15.10      | 2          | 15.10      | 2          | 15.10      | 2          | 15.10      | 2          | 12.80      | 1          | 10.60      |
| 50         | 10         | 16.40      | 10         | 16.40      | 10         | 16.40      | 10         | 16.40      | 8          | 13.90      | 7          | 11.50      |
| 100        | 23         | 20.20      | 23         | 20.20      | 23         | 20.20      | 23         | 20.20      | 20         | 17.00      | 16         | 14.00      |
| 300        | 67         | 16.60      | 56         | 15.10      | 48         | 13.50      | 41         | 11.70      | 41         | 9.60       | 37         | 6.80       |
| 600        | 79         | 9.80       | 79         | 8.90       | 79         | 8.00       | 73         | 6.90       | 59         | 5.60       | 42         | 4.00       |
| 1000       | 110        | 7.50       | 100        | 6.90       | 92         | 6.10       | 79         | 5.30       | 65         | 4.30       | 46         | 3.10       |
| 1500       | 120        | 5.30       | 110        | 4.80       | 95         | 4.30       | 82         | 3.80       | 67         | 3.10       | 47         | 2.20       |
| 1E+04      | 140        | 1.30       | 130        | 1.20       | 120        | 1.00       | 100        | 0.90       | 82         | 0.74       | 58         | 0.52       |
| 1E+05      | 160        | 0.17       | 150        | 0.15       | 130        | 0.14       | 110        | 0.12       | 92         | 0.10       | 65         | 0.07       |
| 1E+06      | 170        | 0.18       | 160        | 0.17       | 140        | 0.15       | 120        | 0.13       | 98         | 0.10       | 70         | 0.07       |

4,7  $\mu\text{F}$  – 40 V – case size 1

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 9.60                   | 0                      | 7.90                   |
| 10         | 3                      | 15.10                  | 3                      | 15.10                  | 3                      | 15.10                  | 3                      | 15.10                  | 2                      | 12.80                  | 2                      | 10.60                  |
| 50         | 14                     | 16.40                  | 14                     | 16.40                  | 14                     | 16.40                  | 14                     | 16.40                  | 12                     | 13.90                  | 10                     | 11.50                  |
| 100        | 33                     | 20.20                  | 33                     | 20.20                  | 33                     | 20.20                  | 33                     | 20.20                  | 28                     | 16.90                  | 22                     | 13.40                  |
| 300        | 77                     | 13.90                  | 64                     | 12.70                  | 58                     | 11.40                  | 58                     | 9.80                   | 58                     | 8.00                   | 44                     | 5.70                   |
| 600        | 110                    | 8.20                   | 110                    | 7.50                   | 100                    | 6.70                   | 87                     | 5.80                   | 71                     | 4.70                   | 50                     | 3.40                   |
| 1000       | 130                    | 6.30                   | 120                    | 5.80                   | 110                    | 5.20                   | 95                     | 4.50                   | 78                     | 3.70                   | 55                     | 2.60                   |
| 1500       | 140                    | 4.50                   | 130                    | 4.10                   | 110                    | 3.60                   | 98                     | 3.20                   | 80                     | 2.60                   | 57                     | 1.80                   |
| 1E+04      | 170                    | 1.10                   | 150                    | 0.98                   | 140                    | 0.87                   | 120                    | 0.76                   | 98                     | 0.62                   | 69                     | 0.44                   |
| 1E+05      | 190                    | 0.20                   | 170                    | 0.18                   | 160                    | 0.17                   | 130                    | 0.14                   | 110                    | 0.12                   | 78                     | 0.08                   |
| 1E+06      | 200                    | 0.22                   | 190                    | 0.20                   | 170                    | 0.18                   | 140                    | 0.15                   | 120                    | 0.12                   | 83                     | 0.09                   |

6,8  $\mu\text{F}$  – 40 V – case size 1

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 9.60                   | 0                      | 7.90                   |
| 10         | 4                      | 15.10                  | 4                      | 15.10                  | 4                      | 15.10                  | 4                      | 15.10                  | 3                      | 12.80                  | 3                      | 10.60                  |
| 50         | 21                     | 16.40                  | 21                     | 16.40                  | 21                     | 16.40                  | 21                     | 16.40                  | 18                     | 13.90                  | 14                     | 11.50                  |
| 100        | 48                     | 20.20                  | 48                     | 20.20                  | 48                     | 20.20                  | 46                     | 19.30                  | 38                     | 15.90                  | 28                     | 11.50                  |
| 300        | 85                     | 11.60                  | 84                     | 10.60                  | 84                     | 9.50                   | 84                     | 8.20                   | 75                     | 6.70                   | 53                     | 4.70                   |
| 600        | 150                    | 6.80                   | 140                    | 6.30                   | 120                    | 5.60                   | 110                    | 4.80                   | 86                     | 4.00                   | 61                     | 2.80                   |
| 1000       | 160                    | 5.30                   | 150                    | 4.80                   | 130                    | 4.30                   | 110                    | 3.70                   | 94                     | 3.00                   | 66                     | 2.20                   |
| 1500       | 170                    | 3.70                   | 150                    | 3.40                   | 140                    | 3.00                   | 120                    | 2.60                   | 97                     | 2.10                   | 68                     | 1.50                   |
| 1E+04      | 200                    | 0.89                   | 190                    | 0.82                   | 170                    | 0.73                   | 140                    | 0.63                   | 120                    | 0.52                   | 83                     | 0.36                   |
| 1E+05      | 230                    | 0.24                   | 210                    | 0.22                   | 190                    | 0.20                   | 160                    | 0.17                   | 130                    | 0.14                   | 94                     | 0.10                   |
| 1E+06      | 250                    | 0.26                   | 220                    | 0.24                   | 200                    | 0.21                   | 170                    | 0.18                   | 140                    | 0.15                   | 100                    | 0.11                   |

10  $\mu\text{F}$  – 40 V – case size 2A

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 11.30                  | 0                      | 9.60                   | 0                      | 7.90                   |
| 10         | 6                      | 15.10                  | 6                      | 15.10                  | 6                      | 15.10                  | 6                      | 15.10                  | 5                      | 12.80                  | 4                      | 10.60                  |
| 50         | 30                     | 16.40                  | 30                     | 16.40                  | 30                     | 16.40                  | 30                     | 16.40                  | 26                     | 13.90                  | 21                     | 11.50                  |
| 100        | 71                     | 20.20                  | 71                     | 20.20                  | 71                     | 20.20                  | 64                     | 18.20                  | 52                     | 14.80                  | 41                     | 10.60                  |
| 300        | 120                    | 10.70                  | 120                    | 9.70                   | 120                    | 8.70                   | 120                    | 7.50                   | 100                    | 6.20                   | 72                     | 4.40                   |
| 600        | 200                    | 6.30                   | 180                    | 5.70                   | 160                    | 5.10                   | 140                    | 4.40                   | 120                    | 3.60                   | 82                     | 2.60                   |
| 1000       | 220                    | 4.80                   | 200                    | 4.40                   | 180                    | 4.00                   | 160                    | 3.40                   | 130                    | 2.80                   | 89                     | 2.00                   |
| 1500       | 230                    | 3.40                   | 210                    | 3.10                   | 180                    | 2.80                   | 160                    | 2.40                   | 130                    | 2.00                   | 92                     | 1.40                   |
| 1E+04      | 280                    | 0.82                   | 250                    | 0.75                   | 230                    | 0.67                   | 200                    | 0.58                   | 160                    | 0.47                   | 110                    | 0.34                   |
| 1E+05      | 310                    | 0.11                   | 280                    | 0.10                   | 250                    | 0.09                   | 220                    | 0.08                   | 180                    | 0.06                   | 130                    | 0.04                   |
| 1E+06      | 330                    | 0.12                   | 300                    | 0.11                   | 270                    | 0.10                   | 230                    | 0.08                   | 190                    | 0.07                   | 140                    | 0.05                   |

15  $\mu$ F – 40 V – case size 2A

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 9.60       | 0          | 7.90       |
| 10         | 8          | 15.10      | 8          | 15.10      | 8          | 15.10      | 8          | 15.10      | 7          | 12.80      | 6          | 10.60      |
| 50         | 46         | 16.40      | 46         | 16.40      | 46         | 16.40      | 46         | 16.40      | 38         | 13.80      | 32         | 11.40      |
| 100        | 110        | 20.20      | 100        | 19.40      | 92         | 17.30      | 79         | 15.00      | 65         | 12.20      | 61         | 8.70       |
| 300        | 180        | 8.70       | 180        | 7.90       | 180        | 7.10       | 150        | 6.20       | 120        | 5.00       | 88         | 3.60       |
| 600        | 250        | 5.10       | 220        | 4.70       | 200        | 4.20       | 170        | 3.60       | 140        | 3.00       | 100        | 2.10       |
| 1000       | 270        | 4.00       | 250        | 3.60       | 220        | 3.20       | 190        | 2.80       | 160        | 2.30       | 110        | 1.60       |
| 1500       | 280        | 2.80       | 250        | 2.50       | 230        | 2.30       | 200        | 2.00       | 160        | 1.60       | 110        | 1.10       |
| 1E+04      | 340        | 0.67       | 310        | 0.61       | 280        | 0.55       | 240        | 0.47       | 200        | 0.39       | 140        | 0.27       |
| 1E+05      | 380        | 0.13       | 350        | 0.12       | 310        | 0.11       | 270        | 0.10       | 220        | 0.08       | 160        | 0.05       |
| 1E+06      | 410        | 0.14       | 370        | 0.13       | 330        | 0.12       | 290        | 0.10       | 230        | 0.08       | 170        | 0.06       |

22  $\mu$ F – 40 V – case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 9.60       | 1          | 7.90       |
| 10         | 12         | 15.10      | 12         | 15.10      | 12         | 15.10      | 12         | 15.10      | 10         | 12.80      | 8          | 10.60      |
| 50         | 67         | 16.40      | 67         | 16.40      | 67         | 16.40      | 67         | 16.40      | 56         | 13.80      | 46         | 11.20      |
| 100        | 160        | 19.90      | 150        | 18.20      | 130        | 16.20      | 110        | 14.00      | 89         | 11.50      | 89         | 8.10       |
| 300        | 270        | 8.20       | 270        | 7.50       | 240        | 6.70       | 210        | 5.80       | 170        | 4.70       | 120        | 3.30       |
| 600        | 340        | 4.80       | 310        | 4.40       | 280        | 3.90       | 240        | 3.40       | 200        | 2.80       | 140        | 2.00       |
| 1000       | 370        | 3.70       | 340        | 3.40       | 300        | 3.00       | 260        | 2.60       | 210        | 2.10       | 150        | 1.50       |
| 1500       | 380        | 2.60       | 350        | 2.40       | 310        | 2.10       | 270        | 1.90       | 220        | 1.50       | 160        | 1.10       |
| 1E+04      | 460        | 0.63       | 420        | 0.57       | 380        | 0.51       | 330        | 0.44       | 270        | 0.36       | 190        | 0.26       |
| 1E+05      | 520        | 0.11       | 480        | 0.10       | 430        | 0.09       | 370        | 0.08       | 300        | 0.06       | 210        | 0.05       |
| 1E+06      | 560        | 0.12       | 510        | 0.11       | 460        | 0.10       | 400        | 0.08       | 320        | 0.07       | 230        | 0.05       |

33  $\mu$ F – 40 V – case size 4

| Freq<br>Hz | T 25 degC  |            | T 45 degC  |            | T 65 degC  |            | T 85 degC  |            | T 105 degC |            | T 125 degC |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|            | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V | Irms<br>mA | Vpeak<br>V |
| 1          | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 11.30      | 1          | 9.60       | 1          | 7.90       |
| 10         | 18         | 15.10      | 18         | 15.10      | 18         | 15.10      | 18         | 15.10      | 15         | 12.80      | 13         | 10.60      |
| 50         | 100        | 16.40      | 100        | 16.40      | 100        | 16.40      | 99         | 16.20      | 83         | 13.50      | 62         | 10.00      |
| 100        | 220        | 16.40      | 180        | 15.00      | 160        | 13.40      | 130        | 11.60      | 130        | 9.50       | 120        | 6.70       |
| 300        | 370        | 6.70       | 330        | 6.10       | 300        | 5.50       | 260        | 4.80       | 210        | 3.90       | 150        | 2.70       |
| 600        | 420        | 4.00       | 380        | 3.60       | 340        | 3.20       | 300        | 2.80       | 240        | 2.30       | 170        | 1.60       |
| 1000       | 460        | 3.10       | 420        | 2.80       | 370        | 2.50       | 320        | 2.20       | 260        | 1.80       | 190        | 1.20       |
| 1500       | 470        | 2.20       | 430        | 2.00       | 380        | 1.80       | 330        | 1.50       | 270        | 1.20       | 190        | 0.88       |
| 1E+04      | 570        | 0.52       | 520        | 0.47       | 470        | 0.42       | 410        | 0.37       | 330        | 0.30       | 230        | 0.21       |
| 1E+05      | 650        | 0.09       | 590        | 0.08       | 530        | 0.07       | 460        | 0.07       | 370        | 0.05       | 260        | 0.04       |
| 1E+06      | 690        | 0.10       | 630        | 0.09       | 560        | 0.08       | 490        | 0.07       | 400        | 0.06       | 280        | 0.04       |



47  $\mu\text{F}$  – 40 V – case size 5

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 2                      | 11.30                  | 2                      | 11.30                  | 2                      | 11.30                  | 2                      | 11.30                  | 2                      | 9.60                   | 1                      | 7.90                   |
| 10         | 26                     | 15.10                  | 26                     | 15.10                  | 26                     | 15.10                  | 26                     | 15.10                  | 22                     | 12.80                  | 18                     | 10.60                  |
| 50         | 140                    | 16.40                  | 140                    | 16.40                  | 140                    | 16.40                  | 140                    | 15.90                  | 110                    | 13.10                  | 83                     | 9.50                   |
| 100        | 290                    | 15.40                  | 240                    | 14.10                  | 210                    | 12.60                  | 190                    | 10.90                  | 190                    | 8.90                   | 160                    | 6.30                   |
| 300        | 490                    | 6.30                   | 450                    | 5.80                   | 400                    | 5.20                   | 350                    | 4.50                   | 280                    | 3.60                   | 200                    | 2.60                   |
| 600        | 560                    | 3.70                   | 510                    | 3.40                   | 460                    | 3.00                   | 400                    | 2.60                   | 320                    | 2.20                   | 230                    | 1.50                   |
| 1000       | 610                    | 2.90                   | 560                    | 2.60                   | 500                    | 2.30                   | 430                    | 2.00                   | 350                    | 1.70                   | 250                    | 1.20                   |
| 1500       | 630                    | 2.00                   | 580                    | 1.80                   | 510                    | 1.70                   | 450                    | 1.40                   | 360                    | 1.20                   | 260                    | 0.83                   |
| 1E+04      | 770                    | 0.49                   | 700                    | 0.44                   | 630                    | 0.40                   | 540                    | 0.34                   | 440                    | 0.28                   | 310                    | 0.20                   |
| 1E+05      | 870                    | 0.09                   | 790                    | 0.08                   | 710                    | 0.07                   | 610                    | 0.06                   | 500                    | 0.05                   | 350                    | 0.04                   |
| 1E+06      | 930                    | 0.10                   | 850                    | 0.09                   | 760                    | 0.08                   | 650                    | 0.07                   | 530                    | 0.06                   | 380                    | 0.04                   |

68  $\mu\text{F}$  – 40 V – case size 5

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 3                      | 11.30                  | 3                      | 11.30                  | 3                      | 11.30                  | 3                      | 11.30                  | 2                      | 9.60                   | 2                      | 7.90                   |
| 10         | 37                     | 15.10                  | 37                     | 15.10                  | 37                     | 15.10                  | 37                     | 15.10                  | 31                     | 12.80                  | 26                     | 10.60                  |
| 50         | 210                    | 16.40                  | 200                    | 15.50                  | 170                    | 13.80                  | 150                    | 12.00                  | 120                    | 9.80                   | 120                    | 6.90                   |
| 100        | 270                    | 11.20                  | 270                    | 10.20                  | 270                    | 9.10                   | 270                    | 7.90                   | 240                    | 6.50                   | 170                    | 4.60                   |
| 300        | 510                    | 4.60                   | 460                    | 4.20                   | 420                    | 3.70                   | 360                    | 3.20                   | 290                    | 2.60                   | 210                    | 1.90                   |
| 600        | 580                    | 2.70                   | 530                    | 2.50                   | 480                    | 2.20                   | 410                    | 1.90                   | 340                    | 1.60                   | 240                    | 1.10                   |
| 1000       | 640                    | 2.10                   | 580                    | 1.90                   | 520                    | 1.70                   | 450                    | 1.50                   | 370                    | 1.20                   | 260                    | 0.85                   |
| 1500       | 660                    | 1.50                   | 600                    | 1.30                   | 540                    | 1.20                   | 460                    | 1.00                   | 380                    | 0.85                   | 270                    | 0.60                   |
| 1E+04      | 800                    | 0.35                   | 730                    | 0.32                   | 650                    | 0.29                   | 570                    | 0.25                   | 460                    | 0.20                   | 330                    | 0.14                   |
| 1E+05      | 900                    | 0.08                   | 820                    | 0.07                   | 740                    | 0.06                   | 640                    | 0.05                   | 520                    | 0.04                   | 370                    | 0.03                   |
| 1E+06      | 960                    | 0.09                   | 880                    | 0.08                   | 790                    | 0.07                   | 680                    | 0.06                   | 560                    | 0.05                   | 390                    | 0.04                   |

100  $\mu\text{F}$  – 40 V – case size 6

| Freq<br>Hz | T 25 degC              |                        | T 45 degC              |                        | T 65 degC              |                        | T 85 degC              |                        | T 105 degC             |                        | T 125 degC             |                        |
|------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
|            | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V | I <sub>rms</sub><br>mA | V <sub>peak</sub><br>V |
| 1          | 4                      | 11.30                  | 4                      | 11.30                  | 4                      | 11.30                  | 4                      | 11.30                  | 3                      | 9.60                   | 3                      | 7.90                   |
| 10         | 55                     | 15.10                  | 55                     | 15.10                  | 55                     | 15.10                  | 55                     | 15.10                  | 46                     | 12.80                  | 38                     | 10.60                  |
| 50         | 300                    | 15.40                  | 270                    | 14.10                  | 230                    | 12.60                  | 200                    | 10.90                  | 170                    | 8.90                   | 170                    | 6.30                   |
| 100        | 400                    | 10.10                  | 400                    | 9.30                   | 400                    | 8.30                   | 390                    | 7.20                   | 320                    | 5.90                   | 220                    | 4.10                   |
| 300        | 680                    | 4.20                   | 620                    | 3.80                   | 550                    | 3.40                   | 480                    | 2.90                   | 390                    | 2.40                   | 280                    | 1.70                   |
| 600        | 780                    | 2.40                   | 710                    | 2.20                   | 640                    | 2.00                   | 550                    | 1.70                   | 450                    | 1.40                   | 320                    | 1.00                   |
| 1000       | 850                    | 2.20                   | 780                    | 2.00                   | 690                    | 1.80                   | 600                    | 1.60                   | 490                    | 1.30                   | 350                    | 0.90                   |
| 1500       | 880                    | 1.80                   | 800                    | 1.60                   | 720                    | 1.50                   | 620                    | 1.30                   | 510                    | 1.00                   | 360                    | 0.73                   |
| 1E+04      | 1070                   | 0.46                   | 970                    | 0.42                   | 870                    | 0.37                   | 760                    | 0.32                   | 620                    | 0.26                   | 440                    | 0.19                   |
| 1E+05      | 1200                   | 0.10                   | 1100                   | 0.09                   | 980                    | 0.08                   | 850                    | 0.07                   | 700                    | 0.06                   | 490                    | 0.04                   |
| 1E+06      | 1290                   | 0.13                   | 1180                   | 0.12                   | 1050                   | 0.10                   | 910                    | 0.09                   | 740                    | 0.07                   | 530                    | 0.05                   |




# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

2222 124

## SOLID ALUMINIUM CAPACITORS

- Miniature type
- Single ended
- Epoxy potted
- Long life
- General and industrial applications



### QUICK REFERENCE DATA

|   |   |
|---|---|
| Nominal capacitance range (E6 series)   | 0,1 to 68 $\mu\text{F}$                   |
| Tolerance on nominal capacitance        | $\pm 20\%$ ( $\pm 10\%$ to special order) |
| Rated voltage range, $U_R$ (R5 series)  | 6,3 to 40 V                               |
| Category temperature range              | $-55$ to $+85$ $^{\circ}\text{C}$         |
| Endurance test at 85 $^{\circ}\text{C}$ | 5000 h                                    |
| Basic specification                     | IEC 384-4, long-life grade                |
| Climatic category, IEC 68               | 55/085/56                                 |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |    |    |    |    |    |
|-----------------------------------|-----------|----|----|----|----|----|
|                                   | 6,3       | 10 | 16 | 25 | 35 | 40 |
| 0,1                               |           |    |    |    |    | 1  |
| 0,15                              |           |    |    |    |    | 1  |
| 0,22                              |           |    |    |    |    | 1  |
| 0,33                              |           |    |    |    |    | 1  |
| 0,47                              |           |    |    |    |    | 1  |
| 0,68                              |           |    |    |    |    | 1  |
| 1                                 |           |    |    | 1  | 1  | 2* |
| 1,5                               |           |    |    | 1  |    | 2  |
| 2,2                               |           |    |    | 1  |    | 2  |
| 3,3                               |           |    | 1  | 1* |    |    |
| 4,7                               |           |    | 1  | 2* |    |    |
| 6,8                               |           |    | 1  | 2  |    |    |
| 10                                |           | 1  | 2  | 2* |    |    |
| 15                                |           | 1  | 2  |    |    |    |
| 22                                | 1         | 2  |    |    |    |    |
| 33                                |           | 2  |    |    |    |    |
| 47                                | 2         |    |    |    |    |    |
| 68                                | 2         |    |    |    |    |    |

| case size | maximum dimensions (mm) |
|-----------|-------------------------|
| 1         | 12,5 x 8,5 x 4,5        |
| 2         | 12,5 x 8,5 x 6          |

\* Available to special order.

**APPLICATION**

These capacitors are for filtering, smoothing, coupling and decoupling purposes in general and industrial applications. They utilize advanced technology to achieve long life, high reliability, high stability and low temperature dependence.

The capacitors have a very low and stable leakage current, small dimensions and a fixed pitch of 5 mm. Thanks to the potted execution they are particularly suited to withstand severe shock and vibration tests.

The taped version is suitable for automatic insertion and for cutting and forming equipment.

**DESCRIPTION**

The capacitor is of a construction with a highly etched aluminium plate anode, aluminium oxide as a dielectric and a solid cathode. The capacitor is potted with epoxy resin in a blue case.

The capacitor is available in three styles, all with soldered-copper radial leads:

- style 1 : with short leads;
- style 2 : with long leads of which the anode lead has a flattened area at the end;
- style 3 : with long leads (without flattened area) on tape on reel, positive leading.

**MECHANICAL DATA**

Dimensions in mm

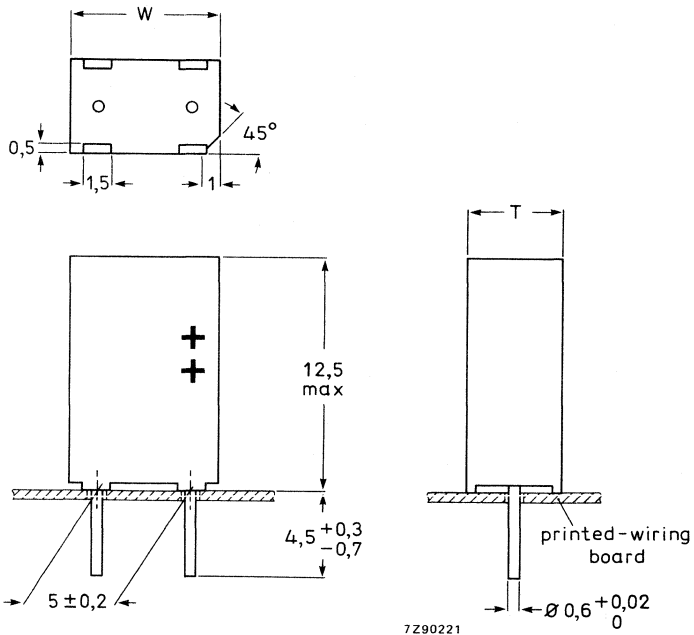


Fig. 1 Style 1; see Table 1a for dimensions T and W.

Note: Capacitors with other lead lengths are available to special order.

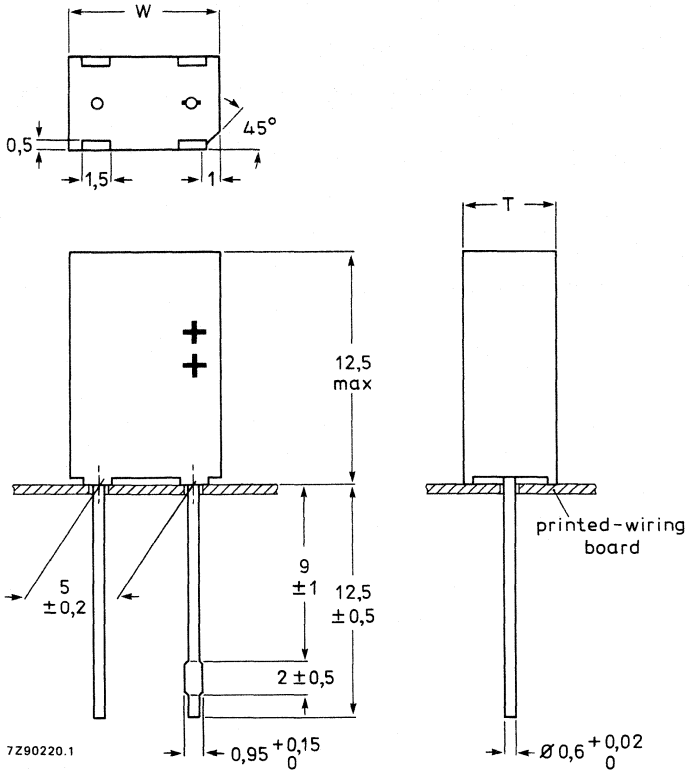


Fig. 2 Style 2; see Table 1a for dimensions T and W.

DEVELOPMENT DATA

Table 1a

| case size | $T_{\text{max}}$ | $W_{\text{max}}$ | mass g |
|-----------|------------------|------------------|--------|
| 1         | 4,5              | 8,5              | 0,4    |
| 2         | 6                | 8,5              | 0,7    |

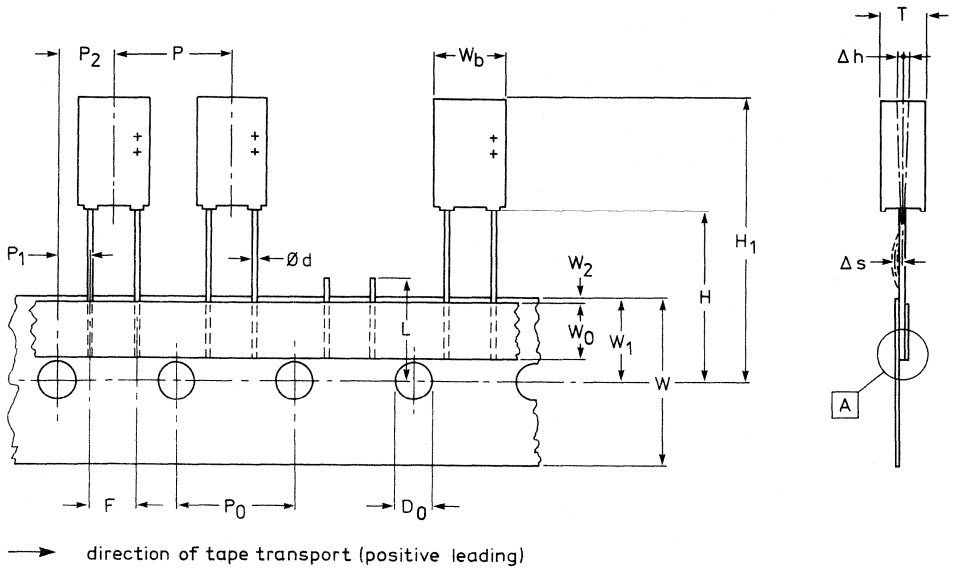


Fig. 3 Style 3 ; see Table 1b for dimensions.

7285986.2




Table 1b

|                                      | symbol     | value | tolerance | remarks                      |
|--------------------------------------|------------|-------|-----------|------------------------------|
| Body thickness                       | T          | 4,5-6 | max.      | for case sizes 1 and 2 resp. |
| Body width                           | $W_b$      | 8     | max.      |                              |
| Component alignment                  | $\Delta h$ | 0     | $\pm 1$   |                              |
| Lead-wire diameter                   | d          | 0,6   | +0,02/-0  |                              |
| Lead straightness                    | $\Delta s$ | 0     | $\pm 0,5$ |                              |
| Length of snapped leads              | L          | 11    | max.      |                              |
| Lead-to-lead distance                | F          | 5     | +0,4/-0,2 |                              |
| Pitch of components                  | P          | 12,7  | $\pm 1$   |                              |
| Feed-hole pitch                      | $P_0$      | 12,7  | $\pm 0,2$ | *                            |
| Feed-hole centre to lead             | $P_1$      | 3,85  | $\pm 0,5$ |                              |
| Feed-hole centre to component centre | $P_2$      | 6,35  | $\pm 1$   |                              |
| Feed-hole diameter                   | $D_0$      | 4     | $\pm 0,2$ |                              |
| Height of component from tape centre | H          | 18,5  | $\pm 0,5$ |                              |
| Component height                     | $H_1$      | 32    | max.      |                              |
| Tape width                           | W          | 18    | $\pm 0,5$ |                              |
| Hold-down tape width                 | $W_0$      | 6     | $\pm 0,5$ | Feed hole shall be free      |
| Hole position                        | $W_1$      | 9     | +0,5/-0,2 |                              |
| Hold-down tape position              | $W_2$      | 0,5   | +0,5/-0,2 |                              |
| Total tape thickness                 | t          | 0,9   | max.      |                              |

\* Cumulative pitch error:  $\pm 0,5$  mm/4 pitches, and  $\pm 1$  mm/20 pitches.

**Marking**

The capacitors are marked with: nominal capacitance, rated voltage, "+" signs to identify the anode terminal, tolerance code (M =  $\pm 20\%$ , K =  $\pm 10\%$ ), date code (year and month) and name of manufacturer.




**Mounting**

The diameter of the mounting holes in the printed-wiring boards is  $0,8 \pm 0,1$  mm, except that of the hole for the anode lead of style 2 capacitors: 1,3–0,2 mm.

**ELECTRICAL DATA**

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 93 to 106 kPa and a relative humidity of 45 to 75%. See also the corresponding paragraphs.

**Table 2**




| UR  | nom. cap. $\mu\text{F}$ | max. r.m.s. ripple current at $T_{\text{amb}} = 85\text{ }^{\circ}\text{C}^*$ mA | max. d.c. leakage current ( $\mu\text{A}$ ) ** at UR after |       | max. $\tan \delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz ** $\Omega$ | case size | catalogue number 2222 124 followed by   |   |   |
|-----|-------------------------|--|--|-------|--------------------|-------------------|---------------------------------------|-----------|---|---|---|
|     |                         |  | 15 s   | 1 min |                    |                   |                                       |           | style 1   | style 2   | style 3   |
| 6,3 | 22                      | 20   | 3,5  | 1,4   | 0,15               | 14                | 1,3                                   | 1         |  |  |  |
|     | 47                      | 42   | 7,4  | 3,0   | 0,15               | 6,4               | 0,7                                   | 2         | 53229   | 73229   | 23229   |
|     | 68                      | 61   | 10,7   | 4,3   | 0,15               | 4,4               | 0,5                                   | 2         | 53479   | 73479   | 23479   |
| 10  | 10                      | 14   | 2,5  | 1,0   | 0,15               | 30                | 1,5                                   | 1         | 53689   | 73689   | 23689   |
|     | 15                      | 21   | 3,8  | 1,5   | 0,15               | 20                | 1                                     | 1         | 54109   | 74109   | 24109   |
|     | 22                      | 31   | 5,5  | 2,2   | 0,15               | 14                | 0,7                                   | 2         | 54159   | 74159   | 24159   |
| 16  | 33                      | 47   | 8,3  | 3,3   | 0,15               | 9                 | 0,5                                   | 2         | 54229   | 74229   | 24229   |
|     | 3,3                     | 8  | 1,3  | 0,5   | 0,10               | 61                | 7                                     | 1         | 54339   | 74339   | 24339   |
|     | 4,7                     | 11   | 1,9  | 0,8   | 0,10               | 43                | 2                                     | 1         | 55338   | 75338   | 25338   |
| 25  | 6,8                     | 16   | 2,7  | 1,1   | 0,10               | 29,5              | 1,5                                   | 1         | 55478   | 75478   | 25478   |
|     | 10                      | 23   | 4,0  | 1,6   | 0,10               | 20                | 1                                     | 2         | 55688   | 75688   | 25688   |
|     | 15                      | 34   | 6,0  | 2,4   | 0,10               | 13,5              | 0,7                                   | 2         | 55109   | 75109   | 25109   |
| 25  | 1                       | 4  | 0,6  | 0,3   | 0,10               | 200               | 20                                    | 1         | 55159   | 75159   | 25159   |
|     | 1,5                     | 5  | 0,9  | 0,4   | 0,10               | 135               | 15                                    | 1         | 56108   | 76108   | 26108   |
|     | 2,2                     | 8  | 1,4  | 0,6   | 0,10               | 91                | 10                                    | 1         | 56158   | 76158   | 26158   |
| 25  | 3,3 $\blacktriangle$    | 12   | 2,1  | 0,8   | 0,10               | 61                | 7                                     | 1         | 56228   | 76228   | 26228   |
|     | 4,7 $\blacktriangle$    | 17   | 2,9  | 1,2   | 0,10               | 43                | 5                                     | 2         | 56338   | 76338   | 26338   |
|     | 6,8                     | 24   | 4,2  | 1,7   | 0,10               | 29,5              | 3                                     | 2         | 56478   | 76478   | 26478   |
| 25  | 10 $\blacktriangle$     | 35   | 6,3  | 2,5   | 0,15               | 20                | 2                                     | 2         | 56688   | 76688   | 26688   |

\* For calculation of the max. ripple current at these and other frequencies and temperatures, see paragraphs "Voltage" and "Ripple current".  
 \*\* Versions with lower values of max. d.c. leakage current or max. impedance are available to special order.  
 $\blacktriangle$  Available to special order.



DEVELOPMENT DATA

Table 2 (continued)

| UR | nom. cap. $\mu F$    | max. r.m.s. ripple current at $T_{amb} = 85^{\circ}C^{*}$ mA | max. d.c. leakage current ( $\mu A$ ) ** |       | max. tan $\delta$ | max. ESR $\Omega$ | max. impedance at 100 kHz** $\Omega$ | case size | catalogue number 2222 124 followed by   |   |   |
|----|----------------------|--|--|-------|-------------------|-------------------|--------------------------------------|-----------|---|---|---|
|    |                      |  | 15 s                                     | 1 min |                   |                   |                                      |           | style 1   | style 2   | style 3   |
| 35 | 1                    | 3  | 0,9                                      | 0,4   | 0,10              | 200               | 15                                   | 1         |  |  |  |
| 40 | 0,1                  | 0,4  | 0,1                                      | 0,04  | 0,10              | 1990              | 70                                   | 1         | 50108   | 70108   | 20108   |
|    | 0,15                 | 0,5  | 0,15                                     | 0,06  | 0,10              | 1330              | 50                                   | 1         | 57107   | 77107   | 27107   |
|    | 0,22                 | 0,8  | 0,22                                     | 0,08  | 0,10              | 910               | 30                                   | 1         | 57157   | 77157   | 27157   |
|    | 0,33                 | 1  | 0,33                                     | 0,13  | 0,10              | 610               | 30                                   | 1         | 57227   | 77227   | 27227   |
|    | 0,47                 | 2  | 0,5                                      | 0,2   | 0,10              | 430               | 20                                   | 1         | 57337   | 77337   | 27337   |
|    | 0,68                 | 2  | 0,7                                      | 0,3   | 0,10              | 295               | 15                                   | 1         | 57477   | 77477   | 27477   |
|    | 1,0 $\blacktriangle$ | 4  | 1,0                                      | 0,4   | 0,10              | 200               | 10                                   | 1         | 57687   | 77687   | 27687   |
|    | 1,5                  | 5  | 1,5                                      | 0,6   | 0,10              | 135               | 7                                    | 2         | 57108   | 77108   | 27108   |
|    | 2,2                  | 8  | 2,2                                      | 0,9   | 0,10              | 91                | 5                                    | 2         | 57158   | 77158   | 27158   |
|    |                      |  |  |       |                   |                   |                                      | 2         | 57228   | 77228   | 27228   |

\* For calculation of the max. ripple current at these and other frequencies and temperatures, see paragraphs "Voltage" and "Ripple current".

\*\* Versions with lower values of max. d.c. leakage current or max. impedance are available to special order.

$\blacktriangle$  Available to special order.

**Capacitance**

Nominal capacitance values at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$  ( $\pm 10\%$  to special order)

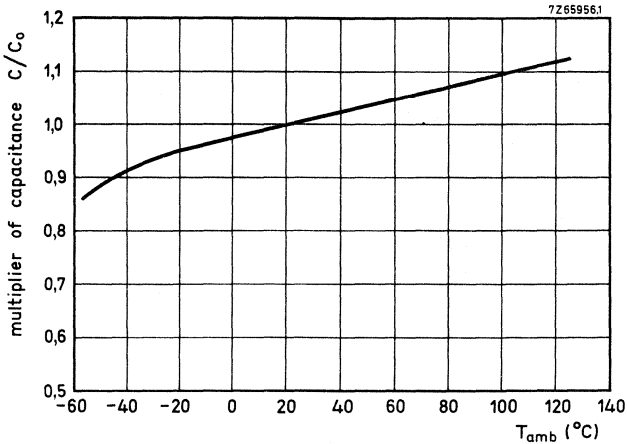


Fig. 4 Multiplier of capacitance as a function of temperature;  $C_0$  = capacitance at  $T_{amb} = 25\text{ }^\circ\text{C}$ , 100 Hz.

**Voltage**

Rated voltage =

max. permissible voltage at  $T_{amb} \leq 85\text{ }^\circ\text{C}$

$U_R$

Ripple voltage =

max. permissible a.c. voltage providing the following four conditions are met:

- a) Max. a.c. voltage, with negative d.c. voltage applied
- b) Max. peak a.c. voltage, without d.c. voltage applied
  - at  $f \leq 0,1\text{ Hz}$
  - at  $0,1\text{ Hz} < f \leq 1\text{ Hz}$
  - at  $1\text{ Hz} < f \leq 10\text{ Hz}$
  - at  $10\text{ Hz} < f \leq 50\text{ Hz}$
  - at  $f > 50\text{ Hz}$
- c) Momentary value of applied voltage, with positive d.c. voltage applied

2 V

$0,15 \times U_R$

$0,22 \times U_R$

$0,30 \times U_R$

$0,32 \times U_R$

$0,40 \times U_R$

between  $U_R$  (in the positive half wave) and the limits mentioned under b) (in the negative half wave)

- d) Ripple voltage limits are not applicable if the maximum ripple current is exceeded. In that case the ripple current is decisive. Whichever is in practice decisive, depends on the actual impedance of the capacitor. Table 3 should be considered as an aid only in establishing whether the ripple voltage or the ripple current is decisive.

Table 3

| frequency                              | decisive factor  |
|--|--|
| $f \leq 50 \text{ Hz}$                 | voltage  |
| $50 \text{ Hz} < f \leq 1 \text{ kHz}$ | voltage, if actual capacitor impedance is high;<br>current, if actual capacitor impedance is low |
| $f > 1 \text{ kHz}$                    | current  |

Surge voltage =

max. permissible voltage for short periods  
(see also Tests and requirements)

$$1,15 \times U_R$$

Reverse voltage =

max. d.c. voltage applied in the reverse polarity  
at the maximum category temperature for short  
periods( see also Tests and requirements)

$$0,30 \times U_R$$

**Ripple current**

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$

see Table 2

Maximum permissible r.m.s. ripple current at other frequencies and temperatures

see Tables 4 and 5, and Fig. 5

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$  for capacitors with lower ESR value than the maximum ESR

$\sqrt{\text{ESR}_{max}/\text{ESR}_{actual}}$  x value stated in Table 2

**Table 4** Temperature multiplier of ripple current ( $\sqrt{k}$ ), at 100 Hz

| $T_{amb}$<br>$^{\circ}\text{C}$ | $\sqrt{k}$ |
|---------------------------------|------------|
| 25                              | 2,2        |
| 30                              | 2,15       |
| 35                              | 2,1        |
| 40                              | 2,05       |
| 45                              | 2,0        |
| 50                              | 1,9        |
| 55                              | 1,8        |
| 60                              | 1,7        |
| 65                              | 1,6        |
| 70                              | 1,45       |
| 75                              | 1,35       |
| 80                              | 1,2        |
| 85                              | 1,0        |

**Table 5** Frequency multiplier of ripple current ( $\sqrt{f}$ ) at 25  $^{\circ}\text{C}$

| frequency<br>kHz | $\sqrt{f}$ |
|------------------|------------|
| 0,05             | 0,8        |
| 0,1              | 1,0        |
| 0,2              | 1,2        |
| 0,5              | 1,4        |
| 1                | 1,55       |
| 2                | 1,70       |
| 5                | 1,80       |
| 10               | 1,95       |
| 20               | 2,05       |
| 50               | 2,15       |
| 100              | 2,20       |
| 200              | 2,25       |
| 500              | 2,30       |
| 1000             | 2,35       |

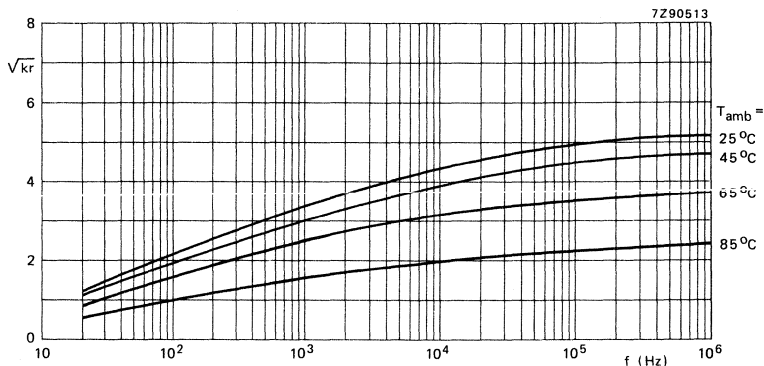


Fig. 5 Combined temperature/frequency multiplier of ripple current ( $\sqrt{kr}$ ) as a function of frequency.  
 $I_{r\ max} = I_{r0} \sqrt{kr}$ .

Note: Neither the maximum permissible ripple current nor the maximum permissible ripple voltage values are to be exceeded. Refer to Table 3 (paragraph "Voltage") to find whichever factor will be decisive.

*Calculation of ripple currents*

The maximum permissible ripple current ( $I_{r \max}$ ) is a function of temperature and frequency:

$$I_{r \max} = I_{r0} \sqrt{kr}$$

- where  $I_{r0}$  = max. ripple current at 100 Hz and 85 °C (see Table 2);
- $\sqrt{k}$  = temperature multiplier (neglecting the frequency dependence) =  $\sqrt{P_{\max}/P_{85}}$ ;
- $\sqrt{r}$  = frequency multiplier (neglecting the temperature dependence) =  $\sqrt{ESR_{100}/ESR_{\max}}$ ;
- (for  $\sqrt{k}$  and  $\sqrt{r}$ , see Tables 4 and 5, for  $\sqrt{kr}$ , see Fig. 5);

- while  $P_{\max}$  = max. permissible power dissipation, temperature dependent;
- $P_{85}$  = max. permissible power dissipation at 85 °C =  $I^2_{r0} ESR_{100}$ ;
- $ESR_{\max}$  = max. equivalent series resistance, frequency dependent;
- $ESR_{100}$  = max. equivalent series resistance at 100 Hz.

The formula is derived for any temperature and frequency as follows:

$$\begin{aligned} I^2_{r \max} &= P_{\max}/ESR_{\max} \\ &= kr P_{85}/ESR_{100} \\ &= kr I^2_{r0} ESR_{100}/ESR_{100} \end{aligned}$$

$$\text{Thus } I_{r \max} = I_{r0} \sqrt{kr}.$$

The values of the temperature multiplier  $\sqrt{k}$  and of  $P_{85}$  have been calculated allowing a capacitor temperature of 98 °C and assuming the values of  $ESR_{\max}$  at 98 °C to be 0,8 times the  $ESR_{\max}$  at 25 °C at all frequencies.

The values of the frequency multiplier  $\sqrt{r}$  have been measured at 25 °C assuming it to be the same at all temperatures.

The power dissipation ( $P_{\max}$ ) has been calculated assuming it to be governed by the simplified relation:

$$P_{\max} = \beta \times S \times \Delta T,$$

- where  $\beta$  = heat transfer coefficient, taken as 18 W/m<sup>2</sup>K (capacitor mounted on a thermally well-conducting printed-circuit board, in free flowing air, the board being in vertical position);
- $S$  = capacitor outer surface;
- $\Delta T$  = temperature difference between capacitor surface and the ambient atmosphere, taken as 13 °C at  $T_{\text{amb}} = 85$  °C.

**Charge and discharge current**

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

DEVELOPMENT DATA

→ D.C. leakage current

Maximum d.c. leakage current 15 s after application of  $U_R$ ,  
at  $T_{amb} = 25\text{ °C}$

see Table 2 (0,025 CU or 0,1  $\mu A$  whichever is greater)

Maximum d.c. leakage current 1 min after application of  $U_R$ ,  
at  $T_{amb} = 25\text{ °C}$

see Table 2 (0,01 CU or 0,04  $\mu A$  whichever is greater)

Typical d.c. leakage current during continuous operation  
at  $U_R$ ,

at  $T_{amb} = 25\text{ °C}$

approx. 0,02 x 15 s-value stated in Table 2

at  $T_{amb} = 85\text{ °C}$

approx. 0,1 x 15 s-value stated in Table 2

at  $T_{amb} = 125\text{ °C}$

approx. 0,3 x 15 s-value stated in Table 2

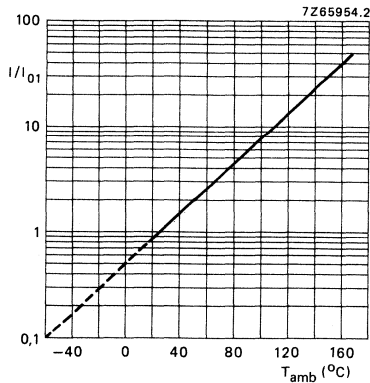


Fig. 6 Multiplier  $I/I_{01}$  as a function of ambient temperature;  $I_{01}$  = d.c. leakage current during continuous operation at  $U_R$ ,  $T_{amb} = 25\text{ °C}$ .

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

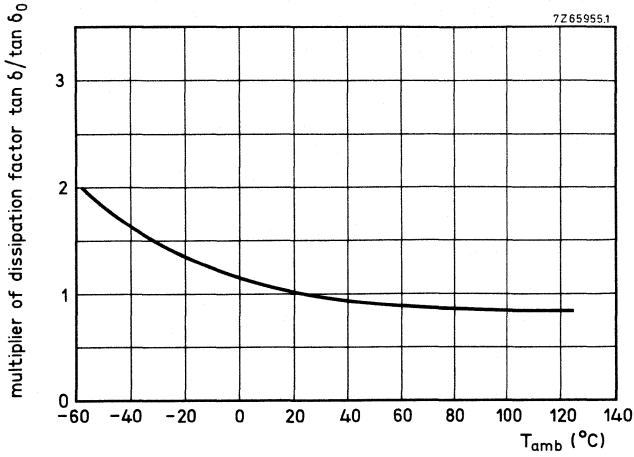


Fig. 7 Typical multiplier of dissipation factor as a function of temperature;  $\tan \delta_0$  = dissipation factor at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , 100 Hz.

Equivalent series resistance ( $ESR = \tan \delta / \omega C$ )

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$  (calculated from maximum  $\tan \delta$  and  $0,8 \times$  nominal capacitance)

→ Maximum ESR at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

equal to values of max. impedance at 100 kHz, see Table 2

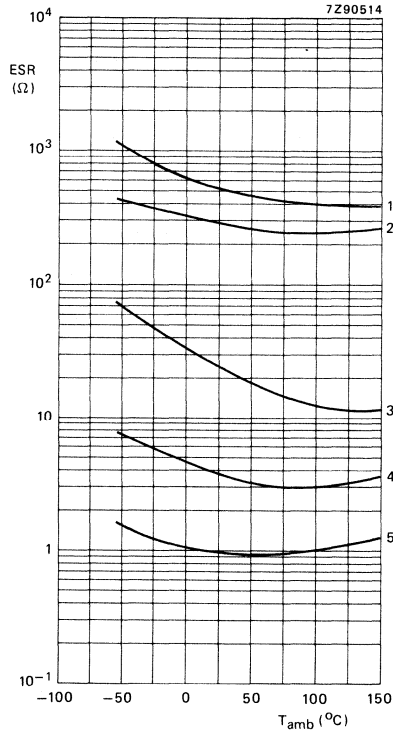


Fig. 8 Typical ESR as a function of ambient temperature at 100 Hz.

Curve 1 =  $0,1\text{ }\mu\text{F}$ , 40 V;

curve 2 =  $1,5\text{ }\mu\text{F}$ , 40 V;

curve 3 =  $3,3\text{ }\mu\text{F}$ , 25 V;

curve 4 =  $22\text{ }\mu\text{F}$ , 10 V;

curve 5 =  $68\text{ }\mu\text{F}$ , 6,3 V.



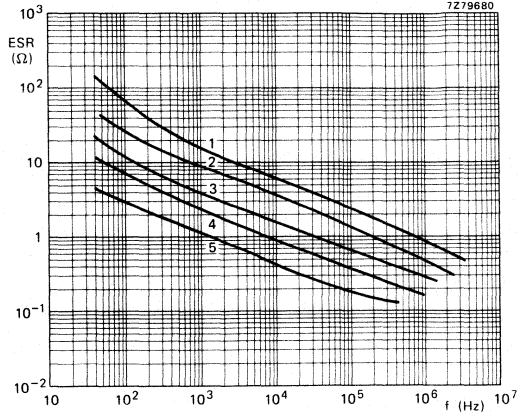


Fig. 9 Typical ESR as a function of frequency at  $T_{\text{amb}} = 25\text{ }^{\circ}\text{C}$ ; case size 1.

Curve 1 =  $0,47\text{ }\mu\text{F}$ ,  $40\text{ V}$ ;

curve 2 =  $2,2\text{ }\mu\text{F}$ ,  $25\text{ V}$ ;

curve 3 =  $4,7\text{ }\mu\text{F}$ ,  $16\text{ V}$ ;

curve 4 =  $10\text{ }\mu\text{F}$ ,  $10\text{ V}$ ;

curve 5 =  $22\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ .

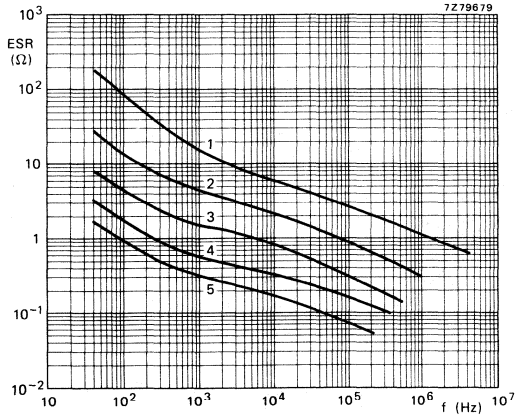


Fig. 10 Typical ESR as a function of frequency at  $T_{\text{amb}} = 25\text{ }^{\circ}\text{C}$ ; case size 2.

Curve 1 =  $1,5\text{ }\mu\text{F}$ ,  $40\text{ V}$ ;

curve 2 =  $6,8\text{ }\mu\text{F}$ ,  $25\text{ V}$ ;

curve 3 =  $15\text{ }\mu\text{F}$ ,  $16\text{ V}$ ;

curve 4 =  $33\text{ }\mu\text{F}$ ,  $10\text{ V}$ ;

curve 5 =  $68\text{ }\mu\text{F}$ ,  $6,3\text{ V}$ .

**Impedance**

Maximum impedance at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

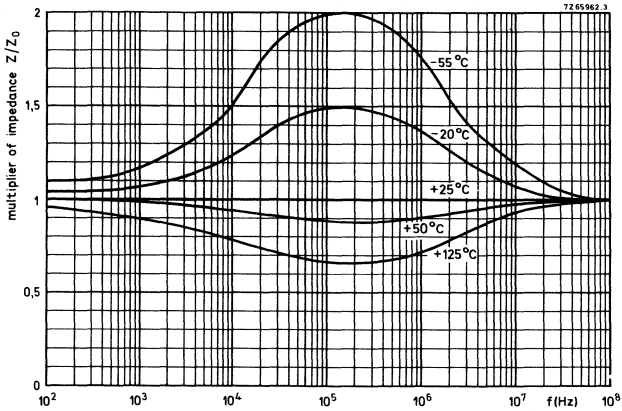


Fig. 11 Typical multiplier of impedance  $Z/Z_0$  as a function of frequency at different temperatures;  $Z_0$  = impedance initial value at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

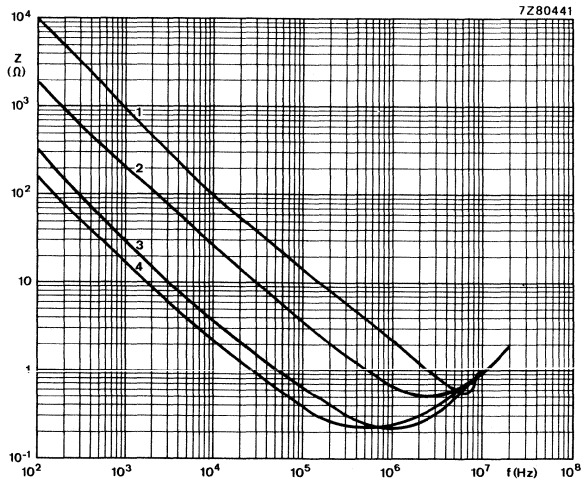


Fig. 12 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , case size 1.

Curve 1 =  $0,47\text{ }\mu\text{F}$ , 40 V;  
 curve 2 =  $2,2\text{ }\mu\text{F}$ , 25 V;

curve 3 =  $10\text{ }\mu\text{F}$ , 10 V;  
 curve 4 =  $22\text{ }\mu\text{F}$ , 6,3 V.

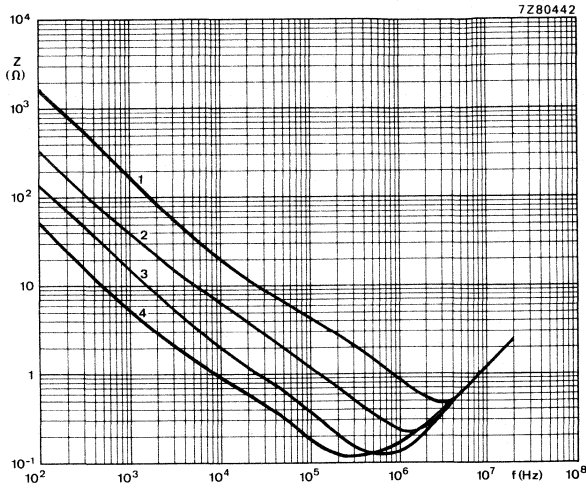


Fig. 13. Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 2.

Curve 1 = 1  $\mu\text{F}$ , 40 V;  
 curve 2 = 4,7  $\mu\text{F}$ , 25 V;

curve 3 = 10  $\mu\text{F}$ , 16 V;  
 curve 4 = 47  $\mu\text{F}$ , 6,3 V.

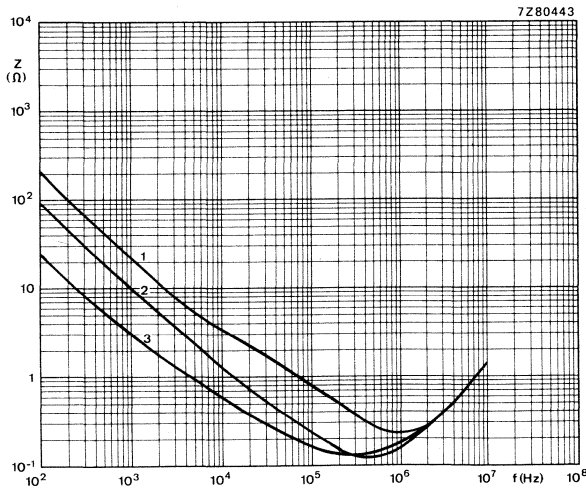


Fig. 14 Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ; case size 2.

Curve 1 = 6,8  $\mu\text{F}$ , 25 V;  
 curve 2 = 15  $\mu\text{F}$ , 16 V;

curve 3 = 68  $\mu\text{F}$ , 6,3 V.

DEVELOPMENT DATA

→ Equivalent series inductance (ESL)

Equivalent series inductance, measured by means of a four-terminal circuit (Thomson-circuit), at 10 MHz;  
 capacitor leads bent to a pitch of 5,1 mm  
 case size 1  
 case size 2

max. 20 nH; typ. 9 to 14 nH  
 max. 20 nH; typ. 11 to 16 nH

OPERATIONAL DATA

Category temperature range

-55 to +85 °C

Typical life time at  $T_{amb} = 85\text{ °C}$

> 20 000 h

PACKING

Capacitors of styles 1 and 2 are supplied in boxes, those of style 3 on tape on reel.  
 The number of capacitors per box or per reel is:

- styles 1 and 2 : 500 capacitors per box; 100 per plastic bag, 5 bags per box;
- style 3 : 1000 capacitors per reel.

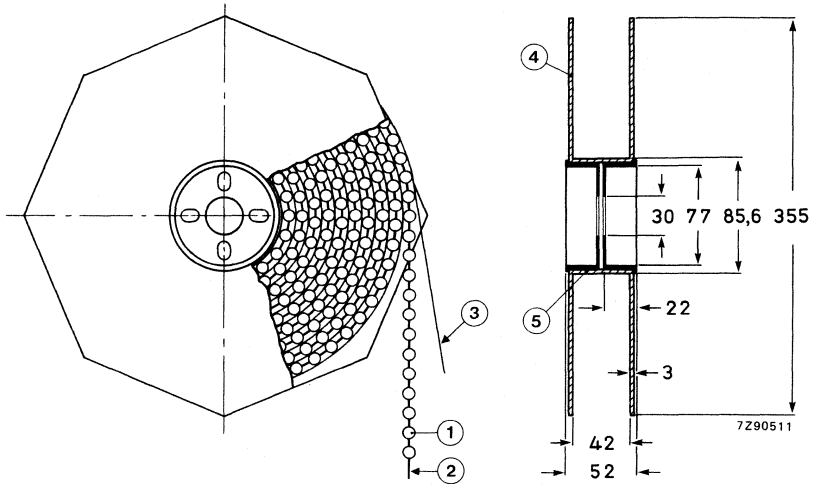


Fig. 15 Style 3 capacitors on tape on reel.

- 1 = capacitor
- 2 = tape
- 3 = paper
- 4 = flange
- 5 = cylinder

## TESTS AND REQUIREMENTS

See Introduction, section 9, under solid aluminium capacitors, with the addition of the following tests.

*Solvent resistance tests:* immersion time of samples 5 min., at ambient temperature, at boiling temperature, in vapour of boiling solvent, and ultrasonic (40 kHz).

- Solvents :
- deionized water ( $50 \pm 5$  °C);
  - calgonite solution (20 g/l,  $70 \pm 5$  °C);
  - mixture of 4,5% 2-butoxyethanol, 4,5% 2-amino-ethanol, and 91% water ( $70 \pm 5$  °C);
  - 1.1.1. trichloro-ethane;
  - mixtures of 1.1.2-trichloro-1.2.2-trifluoro-ethane (fluorocarbon 113) and the following solvents in the respective mass percentage ratios of these solvents to fluorocarbon:
    - 2-propanol (isopropanol), 25%: 75% (Arklone K\*); up to ratio 35% : 65%;
    - dichloromethane (methylene chloride), 49,5%: 50,5% (Freon TMC\*\*);
    - ethanol, 4,5%: 95,5% (e.g. Arklone A\*, Freon TE\*\*);
    - methanol and nitromethane, (5,7%: 0,3%: 94% (Freon TMS\*\*).

Requirement : visual appearance not affected.

Note: Tests are carried out using non-contaminated solvents.

*Extended vibration test*, according to IEC 68-2-6, test FC: 10 to 2000 Hz, 1,5 mm or 10 g (whichever is less), 1 octave/min, 3 directions (mutually perpendicular), 1 sweep per direction, no voltage applied. ←

Requirements : no intermittent contacts; no breakdown; no open circuiting; no mechanical damage;  
 $\Delta C/C \leq 5\%$ ;  
 $\tan \delta$  and h.f. impedance  $\leq 1,2$  x stated limit;  
 d.c. leakage current  $\leq 1,5$  x stated limit;  
 typical capability: up to 50 g.

*Shock test*, according to IEC 68-2-27, test Ea: half sine or sawtooth pulse shape, 50g, 11 ms, 3 successive shocks in each direction of 3 mutually perpendicular axes, no voltage applied. ←

Requirements : no intermittent contacts; no breakdown; no open circuiting; no mechanical damage;  
 $\Delta C/C \leq 5\%$ ;  
 $\tan \delta$  and h.f. impedance  $\leq 1,2$  x stated limit;  
 d.c. leakage current  $\leq 1,5$  x stated limit;  
 typical capability: up to 100 g, also in combination with extended vibration test.

\* Trade mark of I.C.I.

\*\* Trade mark of Dupont de Nemours.




# DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

2222 125

## SOLID ALUMINIUM CAPACITORS

- Enhanced CU-product per unit volume
- Miniature type, equivalent to solid tantalum types
- Axial leads; metal case; epoxy seal
- Long life
- High reliability
- Industrial and military applications
- Pitch equal to that of tantalum case sizes A and B



### QUICK REFERENCE DATA

|  |                                    |
|--|------------------------------------|
| Nominal capacitance range (E6 series)    | 0,22 to 68 $\mu\text{F}$           |
| Tolerance on nominal capacitance         | $\pm 20\%$                         |
| Rated voltage range, $U_R$               | 4 to 35 V                          |
| Category temperature range               | $-55$ to $+125$ $^{\circ}\text{C}$ |
| Endurance test at 125 $^{\circ}\text{C}$ | 2000 h                             |
| Basic specification                      | IEC 384-4, long-life grade         |
| Climatic category, IEC 68                | 55/125/56                          |

Selection chart for  $C_{\text{nom}}-U_R$  and relevant case sizes.

| $C_{\text{nom}}$<br>$\mu\text{F}$ | $U_R$ (V) |      |      |      |      |      |      |
|-----------------------------------|-----------|------|------|------|------|------|------|
|                                   | 4         | 6,3  | 10   | 16   | 20   | 25   | 35   |
| 0,22                              |           |      |      |      |      |      | A2   |
| 0,33                              |           |      |      |      |      |      | A2   |
| 0,47                              |           |      |      |      |      |      | A2   |
| 0,68                              |           |      |      |      |      |      | A2   |
| 1,0                               |           |      |      |      |      |      | A2   |
| 1,5                               |           |      |      |      |      |      | A2   |
| 2,2                               |           |      |      |      |      |      | A2   |
| 3,3                               |           |      |      |      |      |      | A2   |
| 4,7                               |           |      |      |      |      | A2   | A3/B |
| 6,8                               |           |      |      |      | A2   |      | A3/B |
| 10                                |           |      |      | A2   |      | A3/B |      |
| 15                                |           |      | A2   |      | A3/B |      |      |
| 22                                |           | A2   |      | A3/B |      |      |      |
| 33                                | A2        |      | A3/B |      |      |      |      |
| 47                                |           | A3/B |      |      |      |      |      |
| 68                                | A3/B      |      |      |      |      |      |      |

| case size | nominal dimensions (mm)     |
|-----------|-----------------------------|
| A2        | $\varnothing 5,0 \times 10$ |
| A3        | $\varnothing 6,0 \times 10$ |
| B         | $\varnothing 5,0 \times 15$ |

### APPLICATION

These capacitors with high CU-product per unit volume, utilize advanced technology to achieve long life, high stability and reliability, high ripple current rating and low temperature dependence.

The capacitors are not subject to a limitation on charge or discharge currents and they will function in circuits where voltage reversal may occur.

The minimum pitch corresponds to that of tantalum capacitors, case sizes A and B. The capacitors are on bandoliers; they are extremely suitable for automatic insertion and for cutting and forming equipment.

### DESCRIPTION

The capacitors have etched and oxidized aluminium foil electrodes separated by a layer of semiconductive material. The electrolyte is pyrolytically formed manganese dioxide. The capacitors are housed in an aluminium case with axial leads and are sealed with epoxy resin. The cathode lead is welded to the case, which is insulated with a blue transparent plastic sleeve.

The capacitors are supplied on bandoliers in boxes and on reels.

### MECHANICAL DATA

Dimensions in mm

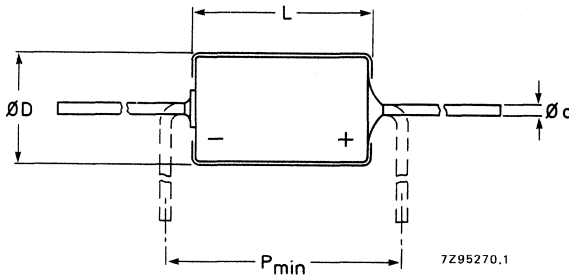


Fig. 1 For dimensions d, D, L and P, see Table 1.

Table 1

| case size | d          | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> | mass approx. g |
|-----------|------------|------------------|------------------|------------------|------------------|------------------|----------------|
| A2        | 0,6 ± 0,05 | 5                | 10               | 5,1              | 10,2             | 12,5             | 0,55           |
| A3        | 0,6 ± 0,05 | 6                | 10               | 6,3              | 10,2             | 12,5             | 0,75           |
| B         | 0,6 ± 0,05 | 5                | 15               | 5,1              | 15,3             | 17,5             | 0,8            |

### Marking

The capacitors are marked with: group number (125), capacitance, tolerance, rated voltage, date code, a band to identify the negative terminal, and name of manufacturer.

### Mounting

No special provisions are required for soldering to the tinned leads. (2 mm of the anode lead nearest the body are not solderable).



## ELECTRICAL DATA

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%. See also the corresponding paragraphs.

Table 2

| DEVELOPMENT DATA | $U_R$ | nom. cap.     | max. r.m.s. ripple current at $T_{amb} = 125\text{ °C}$ | max. d.c. leakage current at $U_R$ after 1 min | max. $\tan \delta$ | max. ESR | max. impedance at 100 kHz | case size | catalogue number 2222 125 followed by |        |
|------------------|-------|---------------|---|--|--------------------|----------|---------------------------|-----------|---------------------------------------|--------|
|                  | V     | $\mu\text{F}$ | mA  | $\mu\text{A}$                                  |                    | $\Omega$ | $\Omega$                  |           | on reel                               | in box |
|                  |       |               |   |  |                    |          |                           |           |                                       |        |
| 4                | 33    |               | 40  | 9,6  | 0,25               | 15       | 5                         | A2        | 22339                                 | 32339  |
|                  | 68    |               | 70  | 17   | 0,25               | 7,3      | 2,5                       | A3        | 90502                                 | 90503  |
|                  | 68    |               | 70  | 17   | 0,25               | 7,3      | 2,5                       | B         | 22689                                 | 32689  |
| 6,3              | 22    |               | 40  | 9,9  | 0,18               | 16,5     | 5                         | A2        | 23229                                 | 33229  |
|                  | 47    |               | 70  | 18   | 0,18               | 7,6      | 2,5                       | A3        | 90504                                 | 90505  |
|                  | 47    |               | 70  | 18   | 0,18               | 7,6      | 2,5                       | B         | 23479                                 | 33479  |
| 10               | 15    |               | 35  | 11   | 0,16               | 21       | 5                         | A2        | 24159                                 | 34159  |
|                  | 33    |               | 60  | 20   | 0,16               | 9,6      | 2,5                       | A3        | 90506                                 | 90507  |
|                  | 33    |               | 60  | 20   | 0,16               | 9,6      | 2,5                       | B         | 24339                                 | 34339  |
| 16               | 10    |               | 30  | 11   | 0,14               | 28       | 10                        | A2        | 25109                                 | 35109  |
|                  | 22    |               | 50  | 21   | 0,14               | 12,5     | 5                         | A3        | 90508                                 | 90509  |
|                  | 22    |               | 50  | 21   | 0,14               | 12,5     | 5                         | B         | 25229                                 | 35229  |
| 20               | 6,8   |               | 25  | 9,8  | 0,14               | 41       | 10                        | A2        | 90511                                 | 90512  |
|                  | 15    |               | 40  | 18   | 0,14               | 18,5     | 5                         | A3        | 90513                                 | 90514  |
|                  | 15    |               | 40  | 18   | 0,14               | 18,5     | 5                         | B         | 90515                                 | 90516  |
| 25               | 4,7   |               | 20  | 8,9  | 0,12               | 51       | 10                        | A2        | 26478                                 | 36478  |
|                  | 10    |               | 35  | 16   | 0,12               | 24       | 5                         | A3        | 90518                                 | 90519  |
|                  | 10    |               | 35  | 16   | 0,12               | 24       | 5                         | B         | 26109                                 | 36109  |
| 35               | 0,22  |               | 5   | 3,4  | 0,09               | 810      | 30                        | A2        | 20227                                 | 30227  |
|                  | 0,33  |               | 6   | 3,6  | 0,09               | 540      | 25                        | A2        | 20337                                 | 30337  |
|                  | 0,47  |               | 7   | 3,8  | 0,09               | 380      | 20                        | A2        | 20477                                 | 30477  |
|                  | 0,68  |               | 8,5   | 4,2  | 0,09               | 260      | 10                        | A2        | 20687                                 | 30687  |
|                  | 1     |               | 10  | 4,8  | 0,09               | 180      | 10                        | A2        | 20108                                 | 30108  |
|                  | 1,5   |               | 13  | 5,6  | 0,09               | 120      | 10                        | A2        | 20158                                 | 30158  |
|                  | 2,2   |               | 15  | 6,9  | 0,12               | 110      | 10                        | A2        | 20228                                 | 30228  |
|                  | 3,3   |               | 19  | 8,8  | 0,12               | 72       | 10                        | A2        | 20338                                 | 30338  |
|                  | 4,7   |               | 25  | 11   | 0,12               | 51       | 5                         | A3        | 90522                                 | 90523  |
|                  | 4,7   |               | 25  | 11   | 0,12               | 51       | 5                         | B         | 20478                                 | 30478  |
|                  | 6,8   |               | 30  | 15   | 0,12               | 35       | 5                         | A3        | 90524                                 | 90525  |
|                  | 6,8   |               | 30  | 15   | 0,12               | 35       | 5                         | B         | 20688                                 | 30688  |

**Capacitance**

Nominal capacitance values at 100 Hz  
and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

Tolerance on nominal capacitance at 100 Hz

$\pm 20\%$

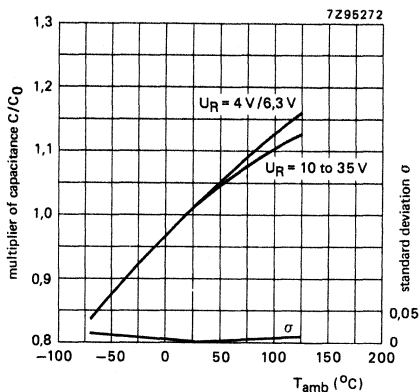


Fig. 2 Typical capacitance as a function of ambient temperature.  
 $C_0$  = capacitance at  $25\text{ }^{\circ}\text{C}$ , 100 Hz.

**Voltage**

Rated voltage =  
max. permissible voltage

$U_R$

Ripple voltage =  
max. permissible a.c. voltage providing the  
following four conditions are met:

- a) Max. a.c. voltage, with negative d.c. voltage applied
- b) Max. peak a.c. voltage, without d.c. voltage applied
- c) Momentary value of applied voltage, with positive d.c. voltage applied

| 2 V                                       |   |
|---|---|
| $T_{amb} \leq 85\text{ }^{\circ}\text{C}$ | $85\text{ }^{\circ}\text{C} < T_{amb} \leq 125\text{ }^{\circ}\text{C}$ |
| $0,30 \times U_R$                         | $0,15 \times U_R$   |
| $0,45 \times U_R$                         | $0,22 \times U_R$   |
| $0,60 \times U_R$                         | $0,30 \times U_R$   |
| $0,65 \times U_R$                         | $0,32 \times U_R$   |
| $0,80 \times U_R$                         | $0,40 \times U_R$   |

between  $U_R$  (in the positive half wave)  
and the limits mentioned under b) (in the  
negative half wave)

- d) Ripple voltage limits are not applicable if the maximum ripple current is exceeded. In that case the ripple current is decisive. Whichever is in practice decisive, depends on the actual impedance of the capacitor. Table 3 should be considered as an aid only in establishing whether the ripple voltage or the ripple current is decisive.

Table 3

| frequency                              | decisive factor  |  |
|--|--|--|
|  | at $T_{amb} \leq 85 \text{ }^{\circ}\text{C}$  | $T_{amb} > 85 \text{ }^{\circ}\text{C}$  |
| $f \leq 50 \text{ Hz}$                 | voltage  | voltage, if actual capacitor impedance is high;<br>current, if actual capacitor impedance is low |
| $50 \text{ Hz} < f \leq 1 \text{ kHz}$ | voltage, if actual capacitor impedance is high;<br>current, if actual capacitor impedance is low | current  |
| $f > 1 \text{ kHz}$                    | current  | current  |

Surge voltage =

max. permissible voltage for short periods  
(see also "Test and requirements")

$$1,15 \times U_R$$

Reverse voltage =

max. d.c. voltage continuously (2000 h)  
applied in the reverse polarity,  
at  $T_{amb} \leq 85 \text{ }^{\circ}\text{C}$   
at  $85 \text{ }^{\circ}\text{C} < T_{amb} \leq 125 \text{ }^{\circ}\text{C}$

$$0,30 \times U_R$$

$$0,15 \times U_R$$

**Ripple current**

Maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 125\text{ }^{\circ}\text{C}$

see Table 2

Maximum permissible r.m.s. ripple current at other frequencies, temperatures and conditions

see Tables 4 to 6, and Fig. 3

**Table 4** Temperature multiplier of ripple current ( $\sqrt{k}$ ), at 100 Hz

**Table 5** Frequency multiplier of ripple current ( $\sqrt{r}$ ) at 25  $^{\circ}\text{C}$

| $T_{amb}$<br>$^{\circ}\text{C}$ | $\sqrt{k}$ |
|---------------------------------|------------|
| 25                              | 2,6        |
| 35                              | 2,5        |
| 45                              | 2,4        |
| 55                              | 2,25       |
| 65                              | 2,2        |
| 70                              | 2,15       |
| 75                              | 2,1        |
| 80                              | 2,05       |
| 85                              | 2,0        |
| 90                              | 1,9        |
| 95                              | 1,8        |
| 100                             | 1,7        |
| 105                             | 1,6        |
| 110                             | 1,45       |
| 115                             | 1,35       |
| 120                             | 1,2        |
| 125                             | 1,0        |

| frequency<br>kHz | $\sqrt{r}$ |
|------------------|------------|
| 0,05             | 0,8        |
| 0,1              | 1,0        |
| 0,2              | 1,2        |
| 0,5              | 1,4        |
| 1                | 1,55       |
| 2                | 1,70       |
| 5                | 1,80       |
| 10               | 1,95       |
| 20               | 2,05       |
| 50               | 2,15       |
| 100              | 2,20       |
| 200              | 2,25       |
| 500              | 2,30       |
| 1000             | 2,35       |

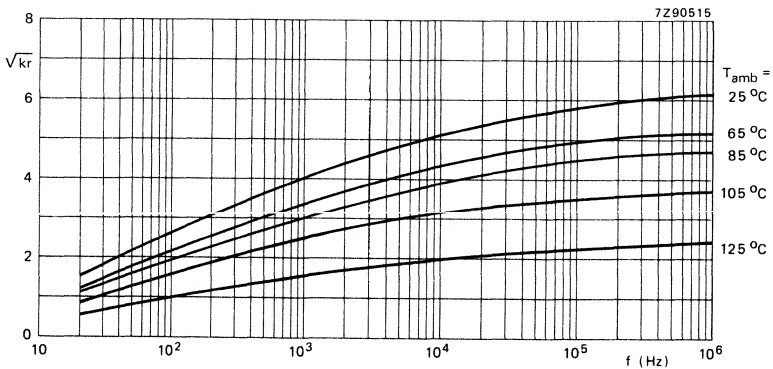


Fig. 3 Combined temperature/frequency multiplier of ripple current ( $\sqrt{kr}$ ) as a function of frequency.  $I_{r\ max} = I_{r0}\sqrt{kr}$ .

**Table 6** Multiplier of ripple current for various application conditions

| condition   | multiplier                              |
|---|---|
| A. Capacitor insulated with a blue sleeve, mounted horizontally on a thermally non-conducting printed-circuit board, in free flowing air and in a surrounding that allows the absorption of radiation heat. | 1,0                                     |
| B. As under A but capacitor is not insulated.   | 0,9                                     |
| C. As under A but capacitor is mounted vertically   | 0,7                                     |
| D. As under A but capacitor is mounted on a thermally well-conducting printed-circuit board.  | 1,25                                    |
| E. As under A but the surrounding walls etc. have a temperature higher than 125 °C and therefore prevent the absorption of heat by radiation  | 0,6                                     |
| F. Capacitor has an ESR value lower than the maximum ESR.   | $\sqrt{\frac{ESR_{max}}{ESR_{actual}}}$ |
| G. As under A but capacitor is epoxy-filled (for severe shock and vibration resistance).  | 1,05                                    |
| H. As under G but capacitor is mounted on a thermally well-conducting printed-circuit board.  | 1,5                                     |

DEVELOPMENT DATA

Note: Neither the maximum permissible ripple current nor the maximum permissible ripple voltage values are to be exceeded. Refer to Table 3 (paragraph "Voltage") to find whichever factor will be decisive.

*Calculation of ripple currents*

The maximum permissible ripple current ( $I_r \text{ max}$ ) is a function of temperature and frequency:

$$I_r \text{ max} = I_{r0} \sqrt{k} r,$$

whre  $I_{r0}$  = max. ripple current at 100 Hz and 125 °C (see Table 2);

$$\sqrt{k} = \text{temperature multiplier (neglecting the frequency dependence) = } \sqrt{P_{max}/P_{125}};$$

$$\sqrt{r} = \text{frequency multiplier (neglecting the temperature dependence) = } \sqrt{ESR_{100}/ESR_{max}};$$

(for  $\sqrt{k}$  and  $\sqrt{r}$ , see Tables 4 and 5, for  $\sqrt{kr}$ , see Fig. 3);

while  $P_{max}$  = max. permissible power dissipation, temperature dependent;

$P_{125}$  = max. permissible power dissipation at 125 °C =  $I_{r0}^2 ESR_{100}$ ;

$ESR_{max}$  = max. equivalent series resistance, frequency dependent;

$ESR_{100}$  = max. equivalent series resistance at 100 Hz.

The formula is derived for any temperature and frequency as follows:

$$\begin{aligned} I_{r \max}^2 &= P_{\max}/ESR_{\max} \\ &= kr P_{125}/ESR_{100} \\ &= kr I_{r0}^2 ESR_{100}/ESR_{100} \end{aligned}$$

$$\text{Thus } I_{r \max} = I_{r0} \sqrt{kr}.$$

The values of the temperature multiplier  $\sqrt{k}$  and of  $P_{125}$  have been calculated allowing a capacitor temperature of 138 °C and assuming the values of  $ESR_{\max}$  at 138 °C to be 0,8 times the  $ESR_{\max}$  at 25 °C at all frequencies.

The values of the frequency multiplier  $\sqrt{r}$  have been measured at 25 °C assuming it to be the same at all temperatures.

The power dissipation ( $P_{\max}$ ) has been calculated assuming it to be governed by the simplified relation:

$$P_{\max} = \beta \times S \times \Delta T,$$

where  $\beta$  = heat transfer coefficient, taken as 9,0 W/m<sup>2</sup>K;

$S$  = capacitor outer surface;

$\Delta T$  = temperature difference between capacitor surface and the ambient atmosphere, taken as 13 °C at  $T_{\text{amb}} = 125$  °C.

### Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting. If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r.m.s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

**D.C. leakage current**

Maximum d.c. leakage current 1 min after application of  $U_R$ ,  
at  $T_{amb} = 25\text{ }^\circ\text{C}$

see Table 2 (max. 0,05 CU + 3  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ ,  
at  $T_{amb} = 25\text{ }^\circ\text{C}$   
at  $T_{amb} = 85\text{ }^\circ\text{C}$   
at  $T_{amb} = 125\text{ }^\circ\text{C}$

approx. 0,5 x value stated in Table 2  
approx. 2 x value stated in Table 2  
approx. 7 x value stated in Table 2

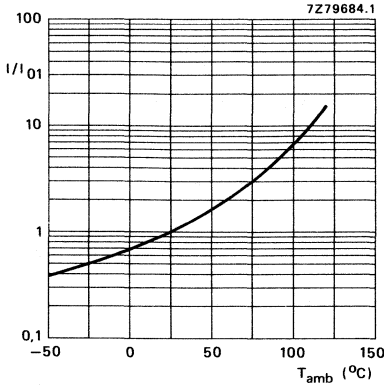


Fig. 4 Multiplier  $I/I_{01}$  as a function of temperature.  $I_{01}$  = d.c. leakage current during continuous operation at  $U_R$ ,  $T_{amb} = 25\text{ }^\circ\text{C}$ .

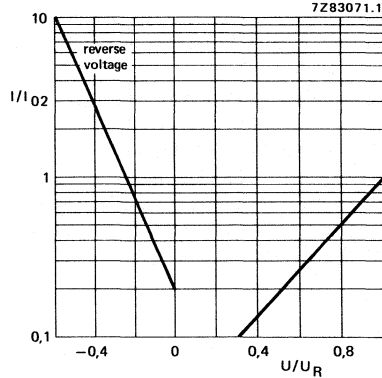


Fig. 5 Multiplier  $I/I_{02}$  as a function of  $U/U_R$ .  $I_{02}$  = d.c. leakage current at  $U_R$  at a discrete constant temperature.

**Tan  $\delta$  (dissipation factor)**

Maximum tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Typical tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^\circ\text{C}$

0,6 x value stated in Table 2

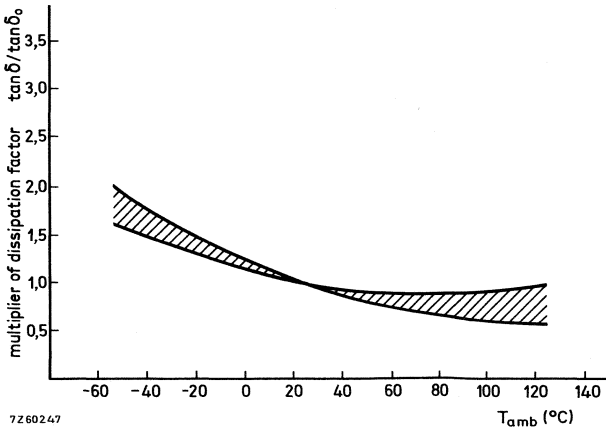


Fig. 6 Multiplier of dissipation factor as a function of ambient temperature;  $\tan \delta_0$  = dissipation factor at  $25\text{ }^\circ\text{C}$ , 100 Hz.

**Equivalent series resistance (ESR =  $\tan \delta / \omega C$ )**

Maximum ESR at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$  (calculated from maximum  $\tan \delta$  and 0,8 x nominal capacitance)

see Table 2

Maximum ESR at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

equal to values of max. impedance at 100 kHz, see Table 2

**Impedance**

Maximum impedance at 100 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured by means of a four-terminal circuit (Thomson circuit)

see Table 2

Typical impedance at 100 kHz, and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

0,5 x value stated in Table 2

**Equivalent series inductance (ESL)**

Equivalent series inductance, measured by means of a four-terminal circuit (Thomson circuit), at 10 MHz; the capacitor leads bent to the pitch as indicated

case size A2

case size A3

case size B

| pitch   | typ. ESL |
|---------|----------|
| 12,5 mm | 12 nH    |
| 12,5 mm | 25 nH    |
| 17,5 mm | 15 nH    |

**OPERATIONAL DATA**

Category temperature range

-55 to + 125  $^{\circ}\text{C}$

Typical life time at  $T_{amb} = 125\text{ }^{\circ}\text{C}$  and  $U_R$

> 5000 h

**PACKING**

The capacitors are supplied on bandoliers in boxes and on reels. The number of capacitors per box and per reel is 1000.



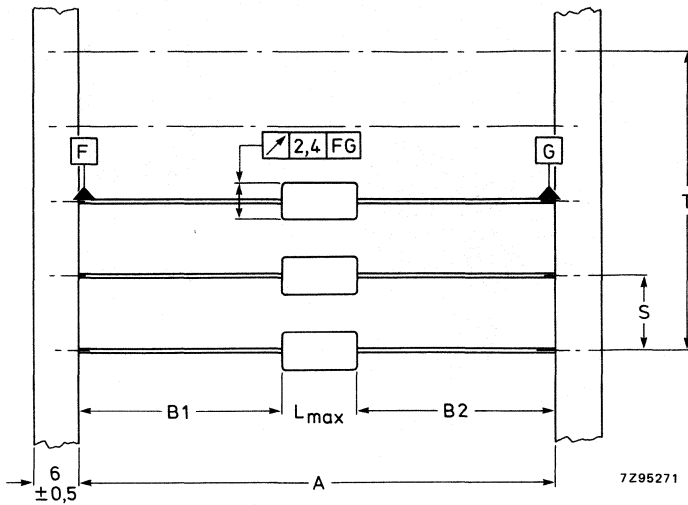


Fig. 7 Capacitors on bandoliers; the bandolier to which the negative capacitor terminals are connected is blue. See Table 7 for dimensions A, S, T and  $L_{max}$ .  
 $|B1 - B2| = 1,4 + (L_{max} - L)$  mm max.

**Table 7** (Dimensions in mm)

| case size | A              | S            | T for number (n) of capacitors |                  | $L_{max}$ |
|-----------|----------------|--------------|--------------------------------|------------------|-----------|
|           |                |              | $n < 50$                       | $50 < n < 100$   |           |
| A2        | $63,5 \pm 1,5$ | $10 \pm 0,4$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 10,2      |
| A3        | $63,5 \pm 1,5$ | $10 \pm 0,4$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 10,2      |
| B         | $63,5 \pm 1,5$ | $10 \pm 0,4$ | $10 (n-1) \pm 2$               | $10 (n-1) \pm 4$ | 15,3      |

DEVELOPMENT DATA

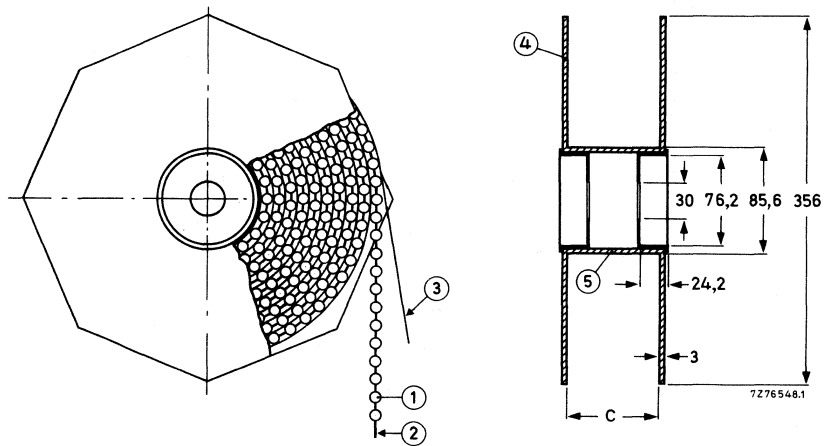


Fig. 8 Capacitors on bandoliers on reel; dimension C = 83,5 mm; the overall width of the reel is 94,5 mm.

- 1 = capacitor
- 2 = bandolier
- 3 = paper
- 4 = flange
- 5 = cylinder

**TESTS AND REQUIREMENTS**

See Introduction, section 9, under solid aluminium capacitors 123, with deviations of requirements of the following tests:

- Climatic sequence*
- Damp heat, steady state*
- Surge*
- Storage at upper category temperature*

$\Delta C/C \leq 10\%$ ; 1 min value of d.c. leakage current measured after 5 min.

Additional test:

*Severe rapid change of temperature test*: 100 cycles of 15 min at  $-40\text{ }^{\circ}\text{C}$  and  $+125\text{ }^{\circ}\text{C}$ .


- Requirements: d.c. leakage current  $\leq$  stated limit,
- $\tan \delta \leq 1,6 \times$  stated limit,
- impedance  $\leq 1,6 \times$  stated limit,
- $\Delta C/C \leq 10\%$ .

## MAINTENANCE TYPES



## ALUMINIUM ELECTROLYTIC CAPACITORS

- Small type
- Bipolar
- Long life
- General and industrial applications



### QUICK REFERENCE DATA

|   |  |
|---|--|
| Nominal capacitance range (E6 series)         | 1 to 47 $\mu\text{F}$  |
| Tolerance on nominal capacitance              | -20 to +20%  |
| Rated voltage $U_R$ (a.c.), frequency > 15 Hz | 63 V peak (40 V r.m.s.), provided ripple current remains within specified limits |
| Rated voltage $U_R$ (d.c.)                    | 63 V (in both directions)  |
| Category temperature range                    | -40 to +85 $^{\circ}\text{C}$  |
| Endurance test at 85 $^{\circ}\text{C}$       | 5000 h   |
| Shelf life at 0 V, 85 $^{\circ}\text{C}$      | 500 h  |
| Basic specification                           | IEC384-4, long-life grade  |
| Climatic category, IEC68                      | 40/085/56  |

Selection chart for C- $U_R$  and relevant case sizes

| $U_R$<br>V | $C_{\text{nom}}$<br>$\mu\text{F}$ | case<br>size | nom. dimensions<br>mm |
|------------|-----------------------------------|--------------|-----------------------|
| 63         | 1                                 | 00           | $\phi$ 10 x 30        |
|            | 1,5                               | 00           | $\phi$ 10 x 30        |
|            | 2,2                               | 00           | $\phi$ 10 x 30        |
|            | 3,3                               | 00           | $\phi$ 10 x 30        |
|            | 4,7                               | 00           | $\phi$ 10 x 30        |
|            | 6,8                               | 00           | $\phi$ 10 x 30        |
|            | 10                                | 01           | $\phi$ 12,5 x 30      |
|            | 15                                | 01           | $\phi$ 12,5 x 30      |
|            | 22                                | 02           | $\phi$ 15 x 30        |
|            | 33                                | 02           | $\phi$ 15 x 30        |
|            | 47                                | 03           | $\phi$ 18 x 30        |

### APPLICATION

These capacitors are especially designed for those applications where a low impedance, small dissipation and an excellent temperature constancy over the audio frequency range is required such as crossover filters in loudspeaker boxes and intercom systems.

## DESCRIPTION

The capacitor has etched aluminium-foil electrodes rolled up with a porous paper spacer which separates the two anodes. The spacer is impregnated with an electrolyte which is the electrical connection between the two anode foils and retains its good characteristics both at low and at high temperatures. The capacitor is housed in an aluminium case. It has soldered-copper leads.

## MECHANICAL DATA

Dimensions in mm

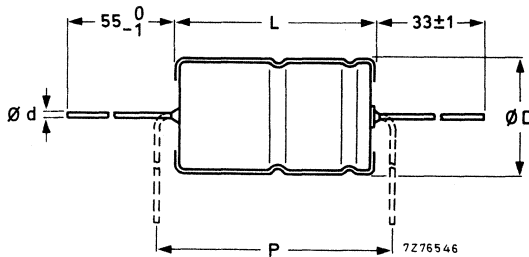


Fig. 1 For dimensions d, D, L and P, see Table 1.

Table 1

| case size | d   | D <sub>nom</sub> | L <sub>nom</sub> | D <sub>max</sub> | L <sub>max</sub> | P <sub>min</sub> | mass approx. g |
|-----------|-----|------------------|------------------|------------------|------------------|------------------|----------------|
| 00        | 0,8 | 10               | 30               | 10,5             | 30,5             | 35               | 4,0            |
| 01        | 0,8 | 12,5             | 30               | 13,0             | 30,5             | 35               | 6,3            |
| 02        | 0,8 | 15               | 30               | 15,5             | 30,5             | 35               | 8,2            |
| 03        | 0,8 | 18               | 30               | 18,5             | 30,5             | 35               | 10,9           |

## Marking

The capacitors are marked with:  
 nominal capacitance;  
 tolerance on nominal capacitance;  
 rated voltage;  
 group number 039;  
 name of manufacturer;  
 date code (year and month) according to IEC62;  
 bipolar.

## Mounting

The diameter of the mounting holes in the printed-wiring board is  $1 + 0,1$  mm.

**Minimum atmospheric pressure** 8,5 kPa

## PRODUCT SAFETY

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

## ELECTRICAL DATA

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 93 to 106 kPa and a relative humidity of 45 to 75%.

| $U_R$ | nom. cap.     | max r.m.s. ripple current at $T_{amb} = 85\text{ °C}$ | max. d.c. leakage current at $U_R$ after 5 min | typ ESR    | max ESR    | case size | catalogue number |
|-------|---------------|---|--|------------|------------|-----------|------------------|
| V     | $\mu\text{F}$ | $\text{mA}^*$   | $\mu\text{A}^*$                                | $\Omega^*$ | $\Omega^*$ |           |                  |
| 63    | 1             | 14  | 57   | 260        | 570        | 00        | 2222 039 18108   |
|       | 1,5           | 19  | 57   | 140        | 290        | 00        | 18158            |
|       | 2,2           | 25  | 57   | 80         | 135        | 00        | 18228            |
|       | 3,3           | 35  | 60   | 38         | 85         | 00        | 18338            |
|       | 4,7           | 42  | 65   | 26         | 59         | 00        | 18478            |
|       | 6,8           | 51  | 71   | 18         | 41         | 00        | 18688            |
|       | 10            | 70  | 81   | 12         | 28         | 01        | 18109            |
|       | 15            | 84  | 97   | 8,5        | 19         | 01        | 18159            |
|       | 22            | 121   | 111  | 5          | 11         | 02        | 18229            |
|       | 33            | 147   | 132  | 3,1        | 7          | 02        | 18339            |
|       | 47            | 213   | 159  | 1,9        | 4,3        | 03        | 18479            |

## Capacitance

The nominal capacitance values at 100 Hz are given in Table 2. The tolerance on nominal capacitance at 100 Hz is  $-20$  to  $+20\%$ .

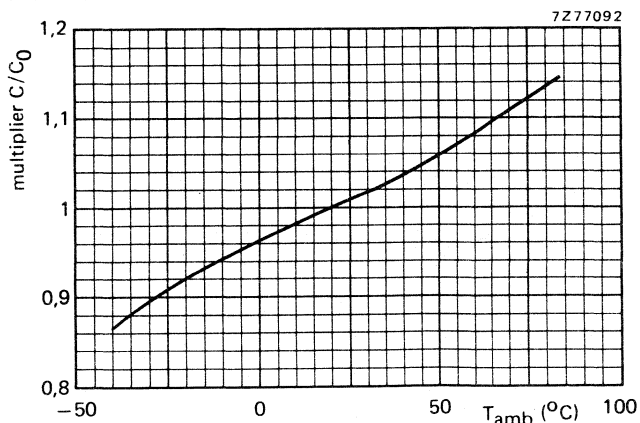


Fig. 2 Typical capacitance as a function of ambient temperature;  $C_0$  = capacitance at 20 °C and 100 Hz.

\* See also corresponding paragraph.

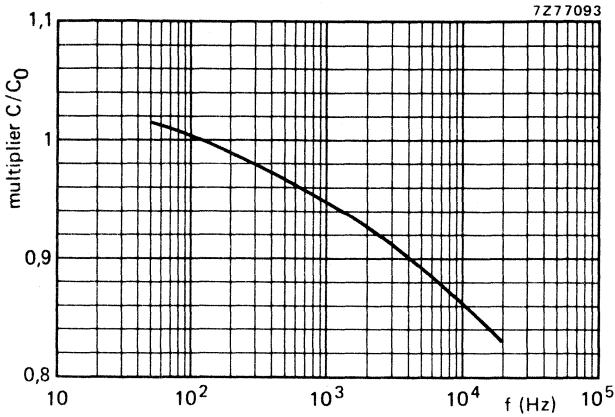


Fig. 3 Typical capacitance as a function of frequency;  $C_0$  = capacitance at 20 °C and 100 Hz.

**Voltage**

The rated voltage  $U_R$  (a.c.) in the temperature range  $-40$  to  $+85$  °C is 63 V peak (40 V r.m.s.), provided the ripple current remains below the specified values in Table 2.

The rated voltage  $U_R$  (d.c.) in the temperature range  $-40$  to  $+85$  °C is 63 V, independent of polarity.

**Ripple current**

The maximum permissible r.m.s. ripple current at 100 Hz and  $T_{amb} = 85$  °C is given in Table 2.

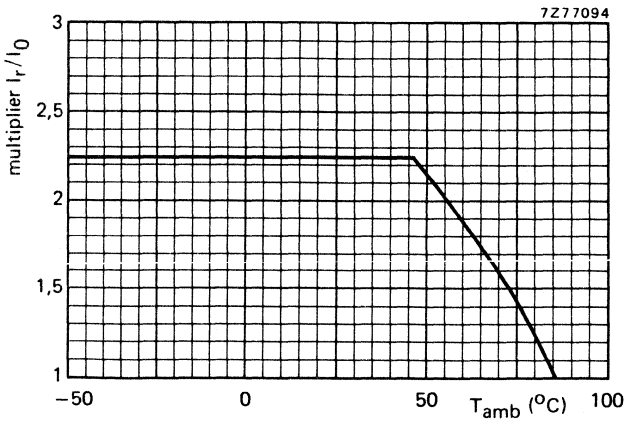


Fig. 4 Typical ripple current as a function of ambient temperature;  $I_0$  = ripple current at 85 °C and 100 Hz.



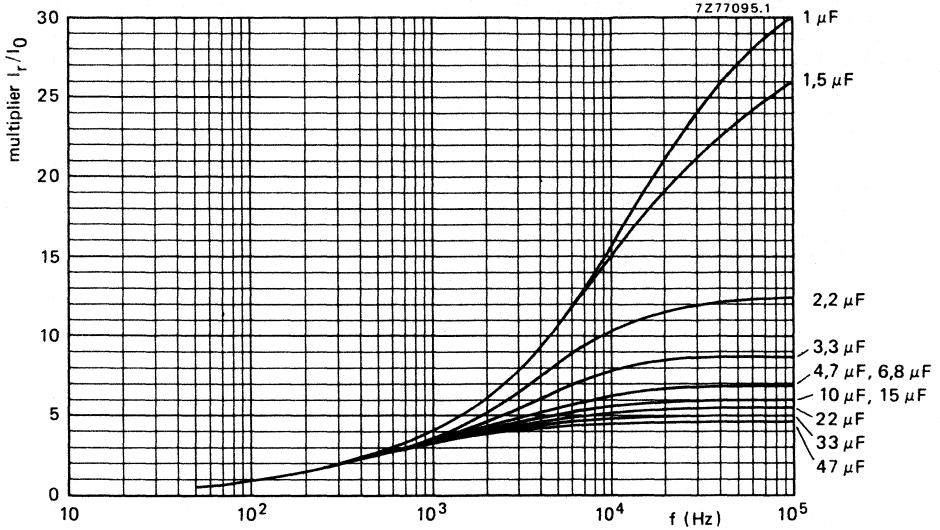


Fig. 5 Typical ripple current as a function of frequency;  $I_0$  = ripple current at 85 °C and 100 Hz.

**D.C. leakage current**

The maximum d.c. leakage current, when the case is at negative potential with respect to the other connection, 5 min after application of the rated voltage at  $T_{amb} = 20$  to 25 °C is given in Table 2.

The maximum d.c. leakage current, when the case is at positive potential with respect to the other connection, may be up to 50 μA higher than the values given in Table 2.

If the d.c. leakage current is too high, owing to prolonged storage and/or storage at an excessive temperature, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

**Equivalent series resistance (ESR)**

The ESR at 100 Hz and  $T_{amb} = 25$  °C, measured by means of a four-terminal circuit (Thomson circuit) is given in Table 2.

For ESR at different frequencies, see graphs on the next page.

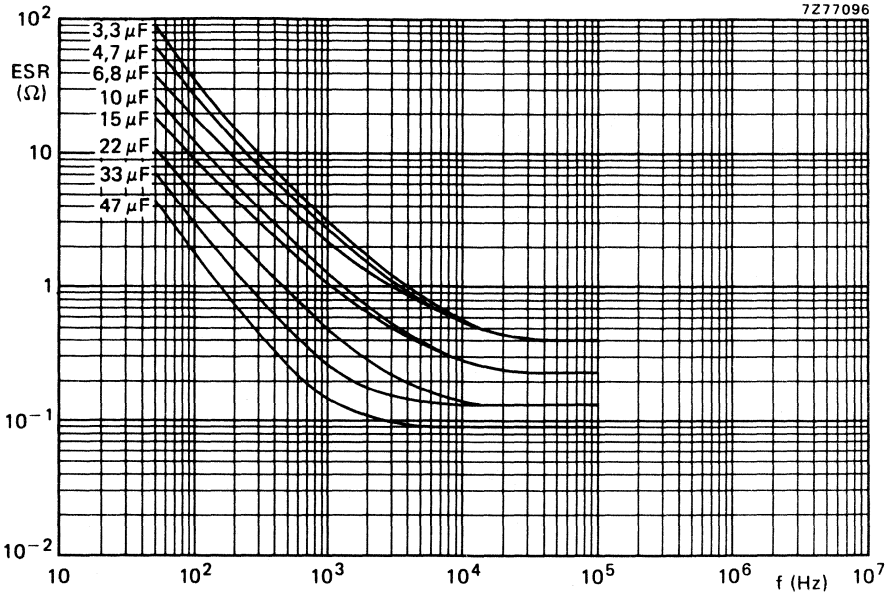


Fig. 6 Typical ESR as a function of frequency at 25 °C.

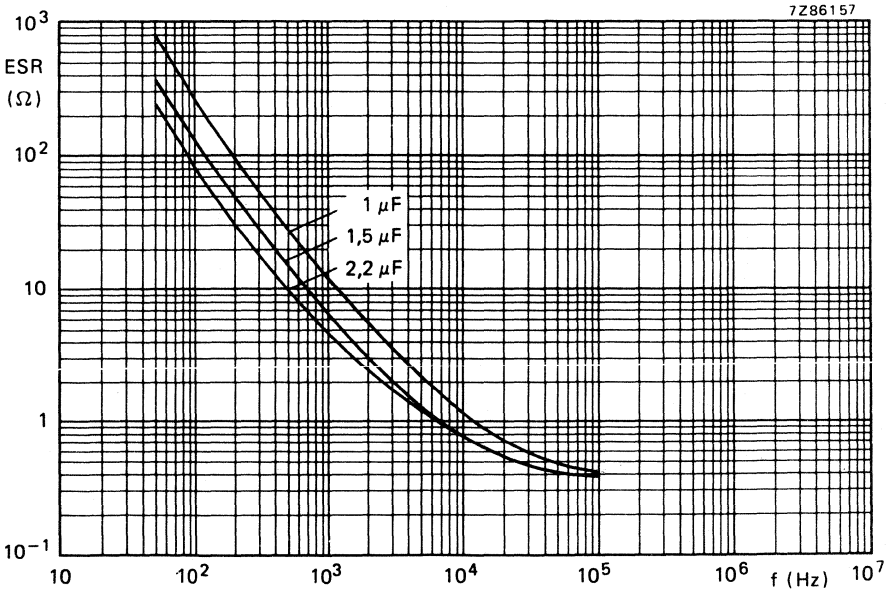


Fig. 7 Typical ESR as a function of frequency at 25 °C.

Impedance

Impedance at  $T_{amb} = 25\text{ }^{\circ}\text{C}$  measured by means of a four-terminal circuit (Thomson circuit).

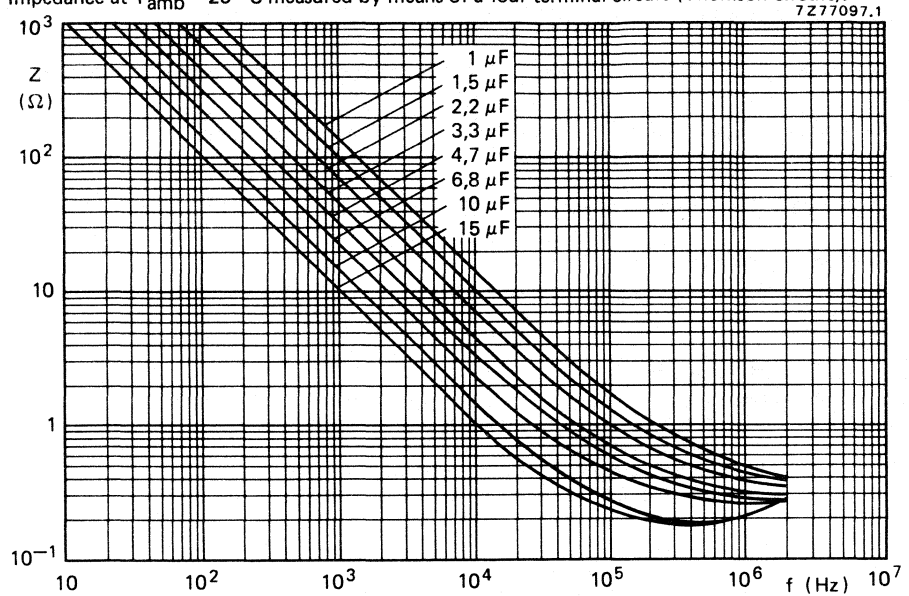


Fig. 8 Typical impedance as a function of frequency at  $25\text{ }^{\circ}\text{C}$ .

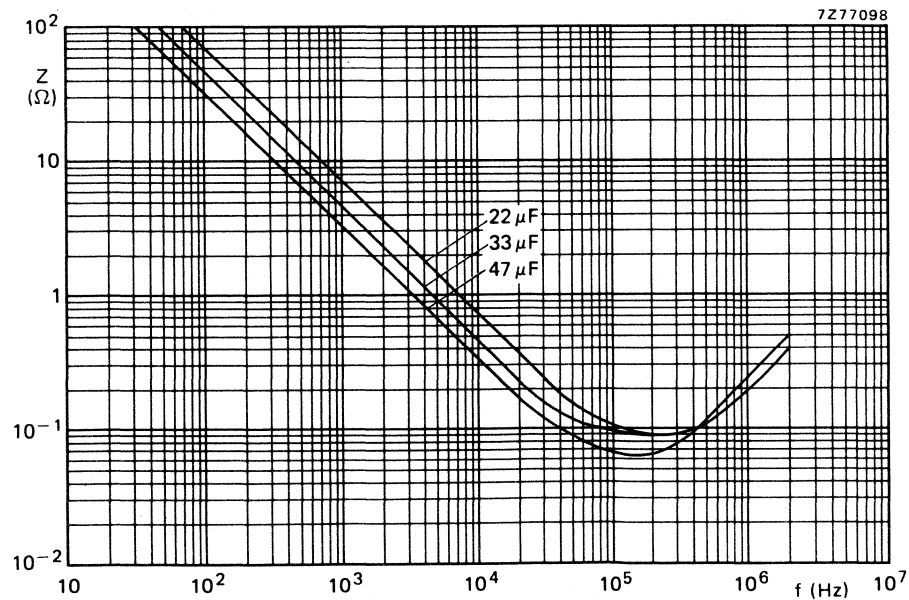


Fig. 9 Typical impedance as a function of frequency at  $25\text{ }^{\circ}\text{C}$ .

**OPERATIONAL DATA**

|  |                |
|--|----------------|
| Category temperature range                     | -40 to + 85 °C |
| Typical life time                              |                |
| at $T_{amb} = 85\text{ °C}$                    | 10 000 h       |
| at $T_{amb} = 40\text{ °C}$                    | > 200 000 h    |
| Shelf life at 0 V and $T_{amb} = 85\text{ °C}$ | 500 h          |

**PACKING**

The capacitors are packed in boxes of 200.

**TEST AND REQUIREMENTS**

See Introduction, section 9, under aluminium electrolytic capacitors, with the exception of IEC384-4 sub clause 9.14, and the figures of  $\tan \delta$ , for which the following is valid.

IEC384-4 sub clause 9.14.

IEC68-2 test method: no reference.

Name of test: Endurance

Procedure a: 5000 h at 85 °C, rated d.c. voltage applied in anv direction.

Requirements: no visible damage, no leakage of electrolyte, d.c. leakage current at applied d.c. voltage in applied direction  $\leq$  stated limit, ESR  $\leq 1,3$  x stated limit,  $\Delta C/C \leq 15\%$ , ratio of impedances at 10 kHz before and after test  $\leq 2$ , insulation resistance > 100 M $\Omega$ , no breakdown or flashover.

Procedure b: 5000 h at 85 °C, rated ripple current applied, no d.c. voltage applied.

Requirements: no visible damage, no leakage of electrolyte, ESR  $\leq 2$  x stated limit,  $\Delta C/C \leq 15\%$ , ratio of impedances at 10 kHz before and after test  $\leq 2$ , insulation resistance > 100 M $\Omega$ , no breakdown or flashover.

After *shelf life test*, 500 h, 85 °C, the capacitors meet the same requirements as after endurance test. The rated voltage shall be applied to the capacitors for minimum 30 min., at least 24 h and not more than 48 h before measurements.

In this data sheet no value is given for  $\tan \delta$ ; where in the tests and requirements  $\tan \delta$  is mentioned, ESR must be read instead.

Note: Capacitors 2222 039 are small types, long-life grade.

## ALUMINIUM ELECTROLYTIC CAPACITORS

- Large type with screw terminals
- Long life
- Military and industrial applications



### QUICK REFERENCE DATA

|  |   |
|--|---|
| Nominal capacitance range (E6 series)  | 1500 to 150 000 $\mu$ F   |
| Tolerance on nominal capacitance       | -10 to +50%   |
| Rated voltage range, $U_R$ (R5 series) | 6,3 to 100 V  |
| Category temperature range             |   |
| 2222 106                               | -40 to +85 $^{\circ}$ C   |
| 2222 107                               | -25 to +85 $^{\circ}$ C   |
| Typical life time at 85 $^{\circ}$ C   | >5000 h   |
| Basic specification                    | IEC 384-4, long-life grade  |
| Climatic category                      |   |
| IEC 68                                 | 40/085/56   |
| DIN 40040                              | GPF (56 days)   |
| NF C93-001                             | 554   |
| IEC 68                                 | 25/085/56   |
| DIN 40040                              | GPF (56 days)   |
| NF C93-001                             | 654   |
| Approvals                              | U.K. Post Office D 2186<br>Ministry of Defence (Navy) DEF5134-1<br>FOA/FTL (Sweden) |

Selection chart for  $C_{nom}$ - $U_R$  and relevant case sizes.

| $C_{nom}$<br>$\mu$ F | $U_R$ (V) |    |    |    |    |    |     |
|----------------------|-----------|----|----|----|----|----|-----|
|                      | 6,3       | 10 | 16 | 25 | 40 | 63 | 100 |
| 1500                 |           |    |    |    |    |    | 11  |
| 2200                 |           |    |    |    |    | 11 | 12  |
| 3300                 |           |    |    |    |    | 12 | 14  |
| 4700                 |           |    |    |    | 11 | 14 | 15  |
| 6800                 |           |    |    | 11 | 12 | 15 |     |
| 10 000               |           |    | 11 | 12 | 14 |    | 16  |
| 15 000               |           | 11 | 12 | 14 | 15 | 16 |     |
| 22 000               | 11        | 12 | 14 | 15 |    |    |     |
| 33 000               | 12        | 14 | 15 |    | 16 |    |     |
| 47 000               | 14        | 15 |    | 16 |    |    |     |
| 68 000               | 15        |    | 16 |    |    |    |     |
| 100 000              |           | 16 |    |    |    |    |     |
| 150 000              | 16        |    |    |    |    |    |     |

| case size | nominal dimensions (mm) |
|-----------|-------------------------|
| 11        | $\varnothing$ 35 x 80   |
| 12        | $\varnothing$ 35 x 112  |
| 14        | $\varnothing$ 50 x 80   |
| 15        | $\varnothing$ 50 x 112  |
| 16        | $\varnothing$ 65 x 112  |

**APPLICATION**

Because of their high reliability and long service life these capacitors are recommended not only for industrial but also for military applications. Their extremely low resistance and inductance values and high resistance to shock and vibration render them very suitable for applications such as :


- switched-mode power supplies;
- power supplies in digital equipment;
- energy storage in pulse systems;
- filters in measuring and control apparatus.

**DESCRIPTION**

The low values of impedance and inductance are achieved by a special construction with multiple internal anode and cathode connections.  
The high resistance to shock and vibration is achieved by the longitudinal rills and special internal construction.  
The capacitors are completely cold-welded and charge/discharge proof.  
The aluminium cases are fully insulated and sealed by a synthetic resin disc with a vent.  
In the case of over-pressure the vent releases this pressure and closes again; the proper operation of the capacitor remains guaranteed.  
The capacitors are delivered with screws and washers.

**MECHANICAL DATA**

Dimensions in mm

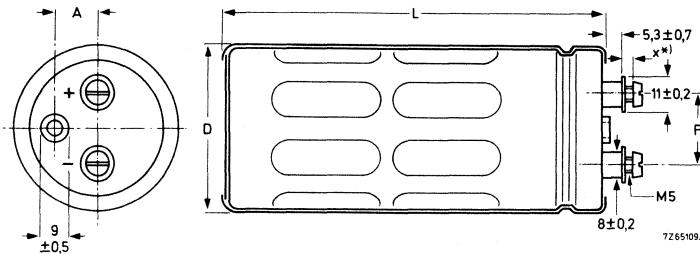

See Table 1 for dimensions D, L, P and A.

\*) Maximum permissible torque which may be applied to the termination screws at various heights (X in drawing) :

| 2   | 4 | 6   | X (mm)                       |
|-----|---|-----|------------------------------|
| 1,5 | 1 | 0,5 | max. permissible torque (Nm) |

Table 1

| case size | D + 1,5 | L + 3 | P ± 0,1 | A ± 0,2 | approx.<br>mass<br>(g) |
|-----------|---------|-------|---------|---------|------------------------|
| 11        | 35      | 80    | 15      | 8,4     | 105                    |
| 12        | 35      | 112   | 15      | 8,4     | 140                    |
| 14        | 50      | 80    | 22      | 14,3    | 200                    |
| 15        | 50      | 112   | 22      | 14,3    | 280                    |
| 16        | 65      | 112   | 31      | 19,0    | 480                    |

**Marking**

The capacitors are marked with: nominal capacitance, tolerance on nominal capacitance, rated voltage, temperature range, IEC type, maximum permissible ripple current at 50 °C, catalogue number and date code.

**Mounting**

The capacitor may be mounted vertically or horizontally, with or without mounting clamp. For proper functioning the vent should be on the upper side, whether the capacitor is mounted horizontally or vertically. When a number of capacitors are connected in a bank, they must not be closer than 15 mm when no derating of ripple current and/or temperature is applied. See also Mounting Accessories, at the end of this data sheet.

**Minimum atmospheric pressure**

8,5 kPa

**PRODUCT SAFETY**

Non-solid electrolytic capacitors may contain chemicals which can be regarded as hazardous if incorrectly handled. Caution is necessary should the outer case be fractured.

**ELECTRICAL DATA**

Table 2

Unless otherwise specified all electrical values in Table 2 apply at an ambient temperature of 20 to 25 °C, a frequency of 100 Hz, an atmospheric pressure of 86 to 106 kPa and a relative humidity of 45 to 75%.

| U <sub>R</sub><br>(V) | nom. cap.<br>(μF) | max. r. m. s. ripple current at T <sub>amb</sub> = 85 °C<br>(A) <sup>1)</sup> | max. d.c. leakage current at U <sub>R</sub> after 5 min<br>(mA) <sup>1)</sup> | typ. ESR<br>(mΩ) <sup>1)</sup> | max. tan δ | impedance at 20 kHz<br>(mΩ) <sup>1)</sup> |      | case size | catalogue number |       |
|-----------------------|-------------------|---|---|--------------------------------|------------|---|------|-----------|------------------|-------|
|                       |                   |   |   |                                |            | typ.                                      | max. |           |                  |       |
| 6,3                   | 22000             | 5,5   | 0,9   | 13,0                           | 0,32       | 8,5                                       | 13,0 | 11        | 2222 106 33223   |       |
|                       | 33000             | 7,9   | 1,3   | 8,5                            | 0,32       | 7,0                                       | 10,5 | 12        |                  | 33333 |
|                       | 47000             | 9,4   | 1,8   | 6,5                            | 0,35       | 5,5                                       | 8,0  | 14        |                  | 33473 |
|                       | 68000             | 13,2  | 2,6   | 4,5                            | 0,35       | 4,0                                       | 6,0  | 15        |                  | 33683 |
|                       | 150000            | 21,3  | 5,7   | 2,5                            | 0,45       | 3,5                                       | 5,5  | 16        |                  | 33154 |
| 10                    | 15000             | 5,3   | 0,9   | 14,0                           | 0,23       | 8,5                                       | 13,0 | 11        | 34153            |       |
|                       | 22000             | 7,5   | 1,4   | 9,5                            | 0,23       | 7,0                                       | 10,5 | 12        | 34223            |       |
|                       | 33000             | 9,1   | 2,0   | 7,0                            | 0,25       | 5,5                                       | 8,0  | 14        | 34333            |       |
|                       | 47000             | 12,8  | 2,9   | 5,0                            | 0,25       | 4,0                                       | 6,0  | 15        | 34473            |       |
|                       | 100000            | 20,5  | 6,0   | 2,5                            | 0,27       | 3,5                                       | 5,5  | 16        | 34104            |       |
| 16                    | 10000             | 5,0   | 1,0   | 16,0                           | 0,16       | 8,5                                       | 13,0 | 11        | 35103            |       |
|                       | 15000             | 7,1   | 1,5   | 10,5                           | 0,16       | 7,0                                       | 10,5 | 12        | 35153            |       |
|                       | 22000             | 8,6   | 2,2   | 8,0                            | 0,18       | 5,5                                       | 8,0  | 14        | 35223            |       |
|                       | 33000             | 12,4  | 3,2   | 5,0                            | 0,18       | 4,0                                       | 6,0  | 15        | 35333            |       |
|                       | 68000             | 19,7  | 6,6   | 2,5                            | 0,19       | 3,5                                       | 5,5  | 16        | 35683            |       |
| 25                    | 6800              | 4,7   | 1,1   | 18,0                           | 0,12       | 8,5                                       | 13,0 | 11        | 36682            |       |
|                       | 10000             | 6,7   | 1,5   | 12,0                           | 0,12       | 7,0                                       | 10,5 | 12        | 36103            |       |
|                       | 15000             | 8,2   | 2,3   | 8,5                            | 0,13       | 5,5                                       | 8,0  | 14        | 36153            |       |
|                       | 22000             | 11,6  | 3,3   | 6,0                            | 0,13       | 4,0                                       | 6,0  | 15        | 36223            |       |
|                       | 47000             | 18,7  | 7,1   | 3,0                            | 0,14       | 3,5                                       | 5,5  | 16        | 36473            |       |
| 40                    | 4700              | 4,3   | 1,2   | 21,0                           | 0,10       | 11,5                                      | 17,0 | 11        | 37472            |       |
|                       | 6800              | 6,0   | 1,7   | 14,5                           | 0,10       | 8,5                                       | 13,0 | 12        | 37682            |       |
|                       | 10000             | 7,4   | 2,4   | 10,5                           | 0,10       | 6,0                                       | 9,0  | 14        | 37103            |       |
|                       | 15000             | 10,6  | 3,6   | 7,0                            | 0,10       | 4,5                                       | 7,0  | 15        | 37153            |       |
|                       | 33000             | 17,6  | 8,0   | 3,5                            | 0,11       | 3,5                                       | 5,5  | 16        | 37333            |       |
| 63                    | 2200              | 3,6   | 0,9   | 30,0                           | 0,065      | 11,5                                      | 17,0 | 11        | 38222            |       |
|                       | 3300              | 5,2   | 1,3   | 20,0                           | 0,065      | 8,5                                       | 13,0 | 12        | 38332            |       |
|                       | 4700              | 6,3   | 1,8   | 14,5                           | 0,070      | 6,0                                       | 9,0  | 14        | 38472            |       |
|                       | 6800              | 8,8   | 2,6   | 10,0                           | 0,070      | 4,5                                       | 7,0  | 15        | 38682            |       |
|                       | 15000             | 14,8  | 5,7   | 5,0                            | 0,075      | 3,5                                       | 5,5  | 16        | 38153            |       |
| 100                   | 1500              | 3,1   | 0,9   | 270                            | 0,40       | 200                                       | 300  | 11        | 2222 107 30152   |       |
|                       | 2200              | 4,5   | 1,4   | 180                            | 0,40       | 130                                       | 200  | 12        |                  | 30222 |
|                       | 3300              | 5,4   | 2,0   | 120                            | 0,40       | 90  | 140  | 14        |                  | 30332 |
|                       | 4700              | 7,7   | 2,9   | 80                             | 0,40       | 60  | 90   | 15        |                  | 30472 |
|                       | 10000             | 12,6  | 6,0   | 40                             | 0,40       | 40  | 60   | 16        |                  | 30103 |


1) See also corresponding paragraph.



Capacitance

Nominal capacitance values at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$  see Table 2

Tolerance on nominal capacitance at 100 Hz -10 to +50%

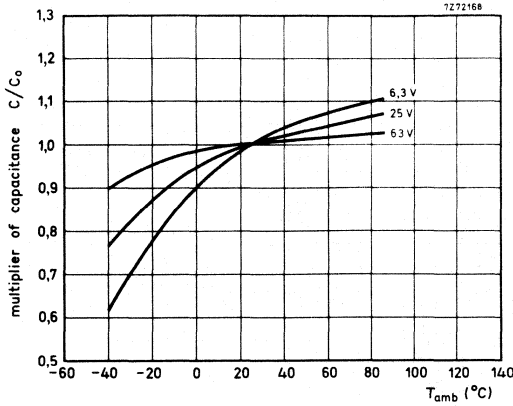

Typical capacitance as a function of ambient temperature;  
 $C_0$  = capacitance at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , 100 Hz.

Voltage

Rated voltage = max. permissible voltage

Ripple voltage\*\* = max. permissible a.c. voltage providing the following three conditions are met:

- a) max. (d.c. + peak a.c.) voltage
- b) max. peak a.c. voltage, with d.c. voltage applied
- c) max. peak a.c. voltage, without d.c. voltage applied

Surge voltage = max. permissible voltage for short periods (see also "Tests and requirements")

Reverse voltage = max. d.c. voltage applied in the reverse polarity at the maximum category temperature (for short periods)

core temperature\*  
< 60 °C | 60 to 95 °C

1,1 x  $U_R$  |  $U_R$

1,1 x  $U_R$  |  $U_R$

applied d.c. voltage + 1 V

1 V

1,15 x  $U_R$

1 V

\* See Introduction, section 5, "Ripple current".

\*\* Ripple voltages are not applicable if the maximum permissible ripple current is exceeded. In that case the ripple current is decisive.

Ripple current

Maximum permissible r. m. s. ripple current  
at 100 Hz and  $T_{amb} = 85\text{ }^{\circ}\text{C}$

see Table 2

at  $T_{amb} = 80\text{ }^{\circ}\text{C}$


1,4 x values stated in Table 2

at  $T_{amb} = 75\text{ }^{\circ}\text{C}$

1,7 x values stated in Table 2 <sup>1)</sup>

at  $T_{amb} \leq 65\text{ }^{\circ}\text{C}$

2,2 x values stated in Table 2 <sup>1)</sup>

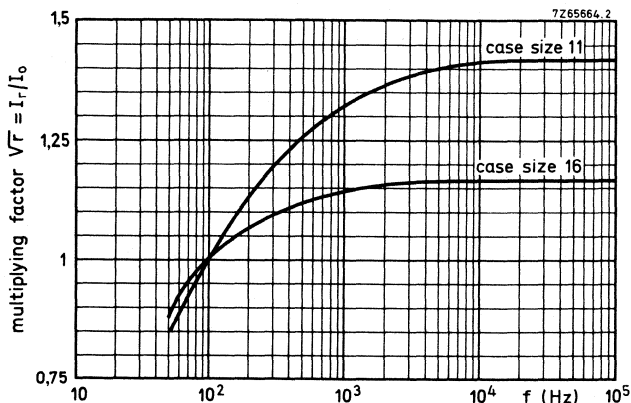

Multiplying factor as a function of frequency, for calculation of max. ripple current <sup>1)</sup>.  
 $I_0$  = maximum ripple current at 85 °C, 100 Hz.

Non-sinusoidal ripple currents have to be analyzed into a number of sinusoidal currents and the following requirements shall then be satisfied:

$$\sum_n \frac{I_n^2}{r_n} \leq I_r^2 \text{ max.}$$

$I_r \text{ max}$  = max. ripple current at 100 Hz and applicable ambient temperature;

$I_n$  = ripple current at a certain frequency;

$\sqrt{r_n}$  = multiplying factor at same frequency.

Note

Ripple currents are not applicable if the maximum permissible ripple voltage is exceeded. In that case the ripple voltage is decisive.

<sup>1)</sup> With a maximum of 30 A.

Charge and discharge current

The capacitors may be charged from a source without internal resistance and they may be discharged by short-circuiting.

If the capacitors are charged and discharged continuously at a rate of several times per minute, the charge and discharge currents have to be considered as ripple currents flowing through the capacitor. The r. m. s. value of these currents should be determined and the value thus found must not exceed the applicable limit.

D.C. leakage current

Maximum d.c. leakage current 5 min after application  
of the rated voltage at  $T_{amb} = 20\text{ }^{\circ}\text{C}$

see Table 2 (0,006 CU + 4  $\mu\text{A}$ )

D.C. leakage current during continuous operation at  $U_R$ ,  
at  $T_{amb} = 20\text{ }^{\circ}\text{C}$

approx. 0,125 of value stated in  
Table 2

at  $T_{amb} = 85\text{ }^{\circ}\text{C}$

$\leq$  value stated in Table 2

If owing to prolonged storage and/or storage at an excessive temperature the d.c. leakage current is too high, application of the rated voltage for some hours will cause the d.c. leakage current to fall to a value lower than specified in Table 2.

Tan  $\delta$  (dissipation factor)


Tan  $\delta$  at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured by means  
of a four-terminal circuit (Thomson circuit)

see Table 2


Impedance

Impedance at 20 kHz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , measured


by means of a four-terminal circuit (Thomson circuit) see Table 2

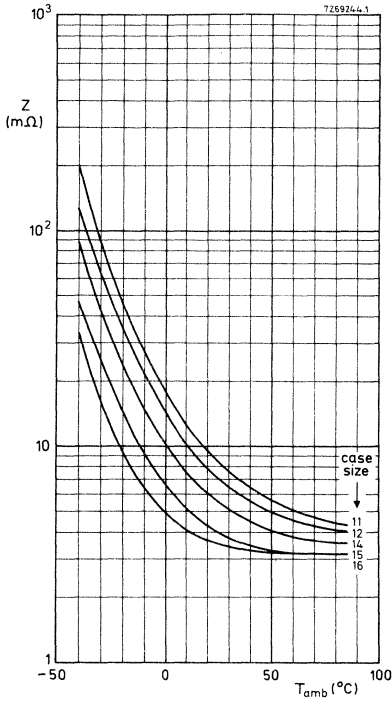

Typical impedance as a function of temperature at 20 kHz for 6, 3 V to 25 V types.

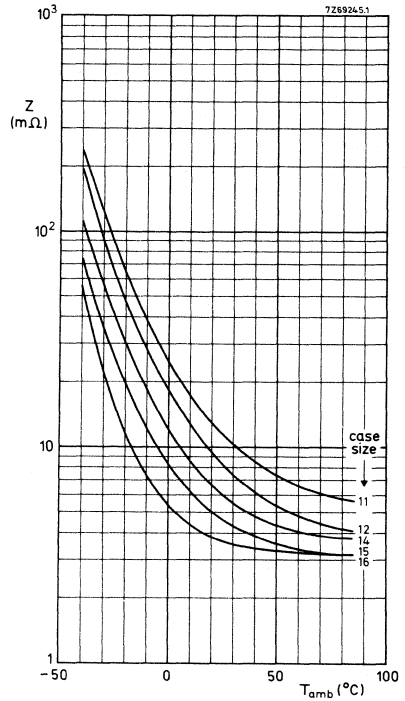


Typical impedance as a function of temperature at 20 kHz for 40 V and 63 V types.

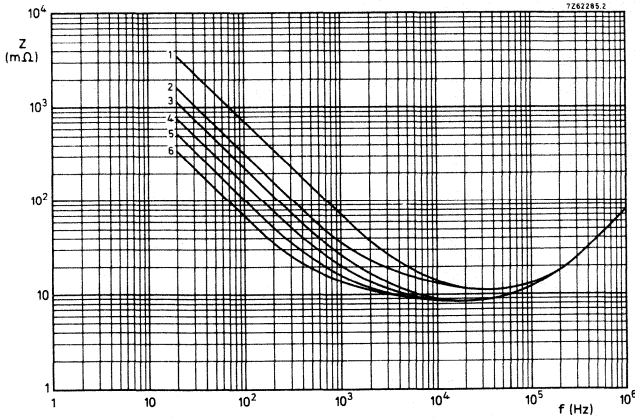

Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

case size 11


- curve 1 = 2200  $\mu\text{F}$ , 63 V
- 2 = 4700  $\mu\text{F}$ , 40 V
- 3 = 6800  $\mu\text{F}$ , 25 V
- 4 = 10 000  $\mu\text{F}$ , 16 V
- 5 = 15 000  $\mu\text{F}$ , 10 V
- 6 = 22 000  $\mu\text{F}$ , 6,3 V

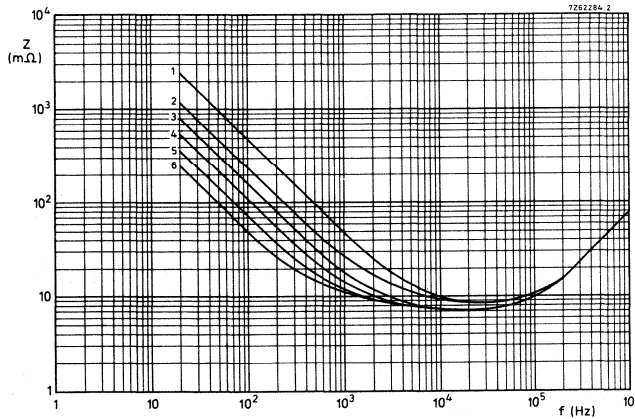

Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

case size 12


- curve 1 = 3300  $\mu\text{F}$ , 63 V
- 2 = 6800  $\mu\text{F}$ , 40 V
- 3 = 10 000  $\mu\text{F}$ , 25 V
- 4 = 15 000  $\mu\text{F}$ , 16 V
- 5 = 22 000  $\mu\text{F}$ , 10 V
- 6 = 33 000  $\mu\text{F}$ , 6,3 V

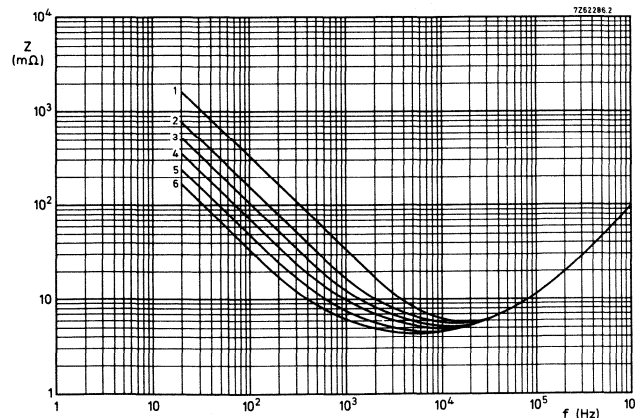

Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

case size 14


- curve 1 = 4700  $\mu\text{F}$ , 63 V
- 2 = 10 000  $\mu\text{F}$ , 40 V
- 3 = 15 000  $\mu\text{F}$ , 25 V
- 4 = 22 000  $\mu\text{F}$ , 16 V
- 5 = 33 000  $\mu\text{F}$ , 10 V
- 6 = 47 000  $\mu\text{F}$ , 6,3 V

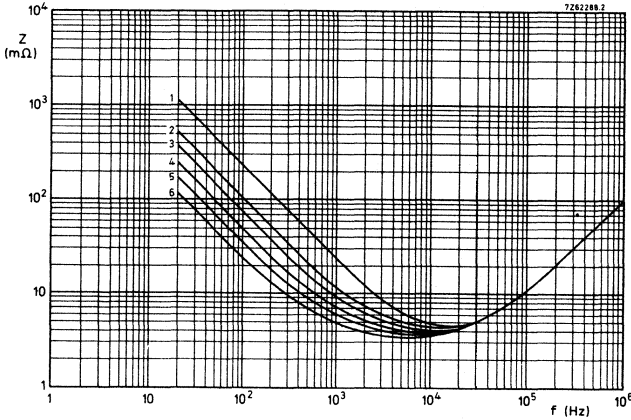

Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .

case size 15

- curve 1 = 6800  $\mu\text{F}$ , 63 V
- 2 = 15 000  $\mu\text{F}$ , 40 V
- 3 = 22 000  $\mu\text{F}$ , 25 V
- 4 = 33 000  $\mu\text{F}$ , 16 V
- 5 = 47 000  $\mu\text{F}$ , 10 V
- 6 = 68 000  $\mu\text{F}$ , 6,3 V

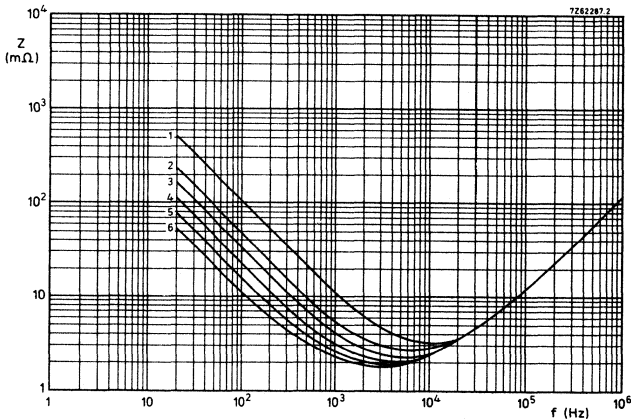

Typical impedance as a function of frequency at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ .


case size 16

- curve 1 = 15 000  $\mu\text{F}$ , 63 V
- 2 = 33 000  $\mu\text{F}$ , 40 V
- 3 = 47 000  $\mu\text{F}$ , 25 V
- 4 = 68 000  $\mu\text{F}$ , 16 V
- 5 = 100 000  $\mu\text{F}$ , 10 V
- 6 = 150 000  $\mu\text{F}$ , 6,3 V


Equivalent series resistance ( $\text{ESR} = \tan \delta / \omega C$ )

ESR at 100 Hz and  $T_{amb} = 25\text{ }^{\circ}\text{C}$

see Table 2

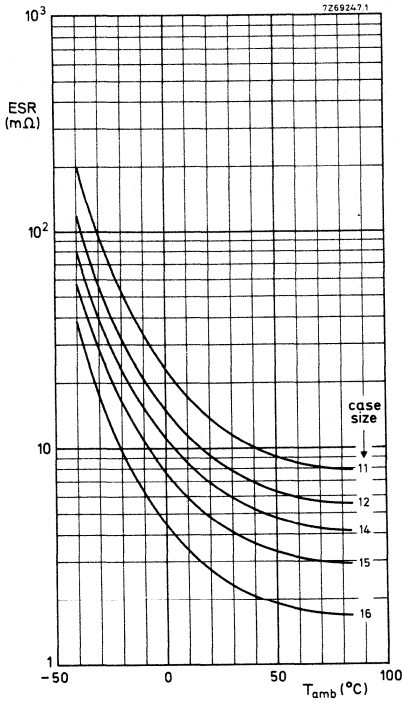

Typical ESR as a function of temperature at 100 Hz for 6,3 V types.

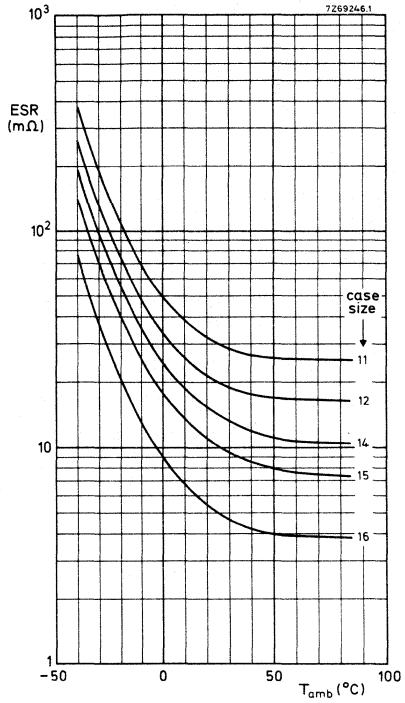

Typical ESR as a function of temperature at 100 Hz for 63 V types.

**Inductance**

| case size | typical inductance |
|-----------|--------------------|
| 11 and 12 | 12 nH              |
| 14 and 15 | 15 nH              |
| 16        | 18 nH              |

2222 106  
2222 107

#### OPERATIONAL DATA

##### Category temperature range

for rated voltage, 2222 106  
for rated voltage, 2222 107

-40 to +85 °C  
-25 to +85 °C

##### Life expectancy

##### Typical lifetime

at  $T_{amb} = 85\text{ °C}$   
at  $T_{amb} = 25\text{ °C}$

>5000 h  
>15 years

#### PACKING

Case sizes 11, 12, 14 and 15: 50 pieces per box.  
Case size 16: 25 pieces per box.

#### TESTS AND REQUIREMENTS

See Introduction, section 9, under aluminium electrolytic capacitors.


Note: Capacitors 2222 106 and 2222 107 belong to the large types with screw terminals, long-life grade.






**MOUNTING ACCESSORIES**

Clamps


To facilitate vertical mounting, a series of rigid clamps made of cadmium-plated steel are available. They can easily be slid over the capacitor and then fixed to it with a nut and bolt. They are provided with two or three mounting lugs. Three types are available, one for each case diameter of the capacitor range. They are delivered without nuts or or bolts.

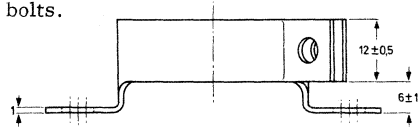

Clamp for case diameter of 35 mm.  
Catalogue number : 4322 043 04272.

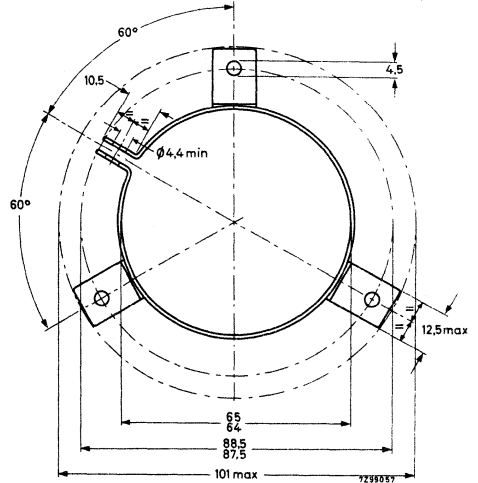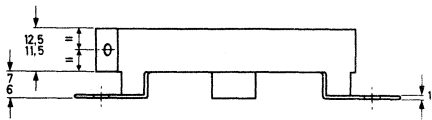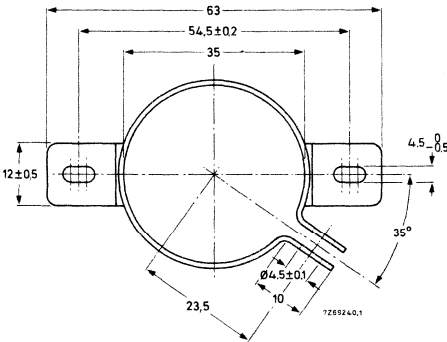

Clamp for case diameter of 65 mm.  
Catalogue number 4322 043 04291.

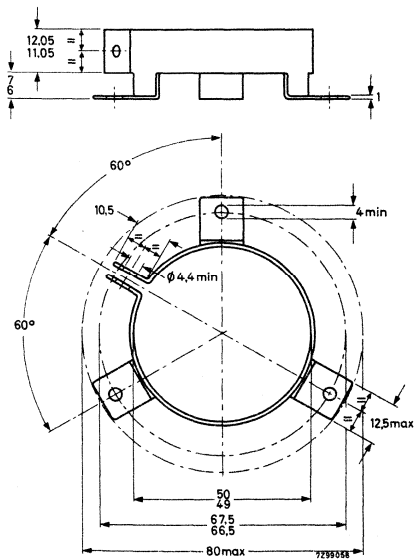

Clamp for case diameter of 50 mm.  
Catalogue number 4322 043 04281.

NOTES

# STANDARD SERIES OF VALUES IN A DECADE

for resistances and capacitances

according to IEC publication 63

| E192 | E96 | E48 | E192 | E96 | E48 | E192 | E96 | E48 | E192 | E96 | E48 | E192 | E96 | E48 |    |
|------|-----|-----|------|-----|-----|------|-----|-----|------|-----|-----|------|-----|-----|----|
| 100  | 100 | 100 | 169  | 169 | 169 | 287  | 287 | 287 | 487  | 487 | 487 | 825  | 825 | 825 |    |
| 101  |     |     | 172  |     |     | 291  |     |     | 493  |     |     | 835  |     |     |    |
| 102  | 102 |     | 174  | 174 |     | 294  | 294 |     | 499  | 499 |     | 845  | 845 |     |    |
| 104  |     |     | 176  |     |     | 298  |     |     | 505  |     |     | 856  |     |     |    |
| 105  | 105 | 105 | 178  | 178 | 178 | 301  | 301 | 301 | 511  | 511 | 511 | 866  | 866 | 866 |    |
| 106  |     |     | 180  |     |     | 305  |     |     | 517  |     |     | 876  |     |     |    |
| 107  | 107 |     | 182  | 182 |     | 309  | 309 |     | 523  | 523 |     | 887  | 887 |     |    |
| 109  |     |     | 184  |     |     | 312  |     |     | 530  |     |     | 898  |     |     |    |
| 110  | 110 | 110 | 187  | 187 | 187 | 316  | 316 | 316 | 536  | 536 | 536 | 909  | 909 | 909 |    |
| 111  |     |     | 189  |     |     | 320  |     |     | 542  |     |     | 920  |     |     |    |
| 113  | 113 |     | 191  | 191 |     | 324  | 324 |     | 549  | 549 |     | 931  | 931 |     |    |
| 114  |     |     | 193  |     |     | 328  |     |     | 556  |     |     | 942  |     |     |    |
| 115  | 115 | 115 | 196  | 196 | 196 | 332  | 332 | 332 | 562  | 562 | 562 | 953  | 953 | 953 |    |
| 117  |     |     | 198  |     |     | 336  |     |     | 569  |     |     | 965  |     |     |    |
| 118  | 118 |     | 200  | 200 |     | 340  | 340 |     | 576  | 576 |     | 976  | 976 |     |    |
| 120  |     |     | 203  |     |     | 344  |     |     | 583  |     |     | 988  |     |     |    |
| 121  | 121 | 121 | 205  | 205 | 205 | 348  | 348 | 348 | 590  | 590 | 590 |      |     |     |    |
| 123  |     |     | 208  |     |     | 352  |     |     | 597  |     |     |      |     |     |    |
| 124  | 124 |     | 210  | 210 |     | 357  | 357 |     | 604  | 604 |     | E24  | E12 | E6  | E3 |
| 126  |     |     | 213  |     |     | 361  |     |     | 612  |     |     |      |     |     |    |
| 127  | 127 | 127 | 215  | 215 | 215 | 365  | 365 | 365 | 619  | 619 | 619 | 10   | 10  | 10  | 10 |
| 129  |     |     | 218  |     |     | 370  |     |     | 626  |     |     | 11   |     |     |    |
| 130  | 130 |     | 221  | 221 |     | 374  | 374 |     | 634  | 634 |     | 12   | 12  |     |    |
| 132  |     |     | 223  |     |     | 379  |     |     | 642  |     |     | 13   |     |     |    |
| 133  | 133 | 133 | 226  | 226 | 226 | 383  | 383 | 383 | 649  | 649 | 649 | 15   | 15  | 15  |    |
| 135  |     |     | 229  |     |     | 388  |     |     | 657  |     |     | 16   |     |     |    |
| 137  | 137 |     | 232  | 232 |     | 392  | 392 |     | 665  | 665 |     | 18   | 18  |     |    |
| 138  |     |     | 234  |     |     | 397  |     |     | 673  |     |     | 20   |     |     |    |
| 140  | 140 | 140 | 237  | 237 | 237 | 402  | 402 | 402 | 681  | 681 | 681 | 22   | 22  | 22  | 22 |
| 142  |     |     | 240  |     |     | 407  |     |     | 690  |     |     | 24   |     |     |    |
| 143  | 143 |     | 243  | 243 |     | 412  | 412 |     | 698  | 698 |     | 27   | 27  |     |    |
| 145  |     |     | 246  |     |     | 417  |     |     | 706  |     |     | 30   |     |     |    |
| 147  | 147 | 147 | 249  | 249 | 249 | 422  | 422 | 422 | 715  | 715 | 715 | 33   | 33  | 33  |    |
| 149  |     |     | 252  |     |     | 427  |     |     | 723  |     |     | 36   |     |     |    |
| 150  | 150 |     | 255  | 255 |     | 432  | 432 |     | 732  | 732 |     | 39   | 39  |     |    |
| 152  |     |     | 258  |     |     | 437  |     |     | 741  |     |     | 43   |     |     |    |
| 154  | 154 | 154 | 261  | 261 | 261 | 442  | 442 | 442 | 750  | 750 | 750 | 47   | 47  | 47  | 47 |
| 156  |     |     | 264  |     |     | 448  |     |     | 759  |     |     | 51   |     |     |    |
| 158  | 158 |     | 267  | 267 |     | 453  | 453 |     | 768  | 768 |     | 56   | 56  |     |    |
| 160  |     |     | 271  |     |     | 459  |     |     | 777  |     |     | 62   |     |     |    |
| 162  | 162 | 162 | 274  | 274 | 274 | 464  | 464 | 464 | 787  | 787 | 787 | 68   | 68  | 68  |    |
| 164  |     |     | 277  |     |     | 470  |     |     | 796  |     |     | 75   |     |     |    |
| 165  | 165 |     | 280  | 280 |     | 475  | 475 |     | 806  | 806 |     | 82   | 82  |     |    |
| 167  |     |     | 284  |     |     | 481  |     |     | 816  |     |     | 91   |     |     |    |

**Argentina:** PHILIPS ARGENTINA S.A., Div. Elcoma, Vedia 3892, 1430 BUENOS AIRES, Tel. 541-7141/7242/7343/7444/7545.

**Austria:** PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division, 11 Waltham Street, ARTARMON, N.S.W. 2064, Tel. (02)439 3322.

**Austria:** ÖSTERREICHISCHE PHILIPS BAUELEMENTE INDUSTRIE G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 62 91 11.

**Belgium:** N.V. PHILIPS & MBLÉ ASSOCIATED, 9 rue du Pavillon, B-1030 BRUXELLES, Tel. (02) 2427400.

**Brazil:** IBRAPE, Caixa Postal 7383, Av. Brigadeiro Faria Lima, 1735 SAO PAULO, SP, Tel. (011) 211-2600.

**Canada:** PHILIPS ELECTRONICS LTD., Elcoma Division, 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. 292-5161.

**Chile:** PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. 39-4001.

**Colombia:** IND. PHILIPS DE COLOMBIA S.A., c/o IPRELENCO LTD., Cra. 21, No. 56-17, BOGOTA, D.E., Tel. 2 497624.

**Denmark:** MINIWATT A/S, Strandlovsvej 2, P.O. Box 1919, DK 2300 COPENHAGEN S, Tel. (01) 54 11 33.

**Finland:** OY PHILIPS AB, Elcoma Division, Kaiwokatu 8, SF-00100 HELSINKI 10, Tel. 1 7271.

**France:** R.T.C. LA RADIOTECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 338 80-00.

**Germany (Fed. Republic):** VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-0.

**Greece:** PHILIPS S.A. HELLENIQUE, Elcoma Division, 52, Av. Syngrou, ATHENS, Tel. 921511L.

**Hong Kong:** PHILIPS HONG KONG LTD., Elcoma Div., 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0)-2451 21.

**India:** PEICO ELECTRONICS & ELECTRICALS LTD., Elcoma Dept., Band Box Building, 254-D Dr. Annie Besant Rd., BOMBAY - 400 025, Tel. 4220387/4220311.

**Indonesia:** P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Panim Bank Building, 2nd Fl., Jl. Jend. Sudirman, P.O. Box 223, JAKARTA, Tel. 716 131.

**Ireland:** PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 693355.

**Italy:** PHILIPS S.p.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2-6752-1.

**Japan:** NIHON PHILIPS CORP., Shwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611.  
(IC Products) SIGNETICS JAPAN LTD., 8-7 Sanbancho Chiyoda-ku, TOKYO 102, Tel. (03) 230-1521.

**Korea (Republic of):** PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Haewon-dong, Yongsan-ku, SEOUL, Tel. 794-4202.

**Malaysia:** PHILIPS MALAYSIA SDN. BERHAD, No. 4 Persiaran Barat, Petaling Jaya, P.O. B. 2163, KUALA LUMPUR, Selangor, Tel. 77 44 11.

**Mexico:** ELECTRONICA, S.A. de C.V., Carr. México-Toluca km. 62.5, TOLUCA, Edo. de México 50140, Tel. Toluca 91 (721) 613-00.

**Netherlands:** PHILIPS NEDERLAND, Marktgroep Elconco, Postbus 90050, 5600 PB EINDHOVEN, Tel. (040) 79 3333.

**New Zealand:** PHILIPS HONG ZEALAND LTD., Elcoma Division, 110 Mt. Eden Road, C.P.O. Box 1041, AUCKLAND, Tel. 605-914.

**Norway:** NORSK A/S PHILIPS, Electronica Dept., Sandstuveien 70, OSLO 6, Tel. 68 02 00.

**Peru:** CADESA, Av. Alfonso Ugarte 1268, LIMA 5, Tel. 326070.

**Philippines:** PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tamo, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. 86-89-51 to 59.

**Ireland:** PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 693355.

**Portugal:** PHILIPS PORTUGUESA S.A.R.L., Av. Eng. Duarte Pacheco 6, 1009 LISBOA Codex, Tel. 683121.

**Singapore:** PHILIPS PROJECT DEV. (Singapore) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 3502000.

**South Africa:** EDAC (PTY.) LTD., 3rd Floor Rainer House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001, Tel. 614-2362/9.

**Spain:** MINIWATT S.A., Balmes 22, BARCELONA 7, Tel. 301 63 12.

**Sweden:** PHILIPS KOMPONENTER A.B., Lidingövägen 50, S-11584 STOCKHOLM 27, Tel. 08/7821000.

**Switzerland:** PHILIPS A.G., Elcoma Dept., Allmendstrasse 140-142, CH-8027 ZÜRICH, Tel. 01-488 22 11.

**Taiwan:** PHILIPS TAIWAN LTD., 3rd Fl., San Min Building, 57-1, Chung Shan N. Rd, Section 2, P.O. Box 22978, TAIPEI, Tel. (02)-5631717.

**Thailand:** PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Silom Road, P.O. Box 961, BANGKOK, Tel. 233-6330-9.

**Turkey:** TÜRK PHILIPS TICARET A.Ş., Elcoma Department, İnönü Cad. No. 78-80, ISTANBUL, Tel. 43 59 10.

**United Kingdom:** MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-5806633.

**United States:** (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000.  
(Passive Devices) MEPCO/ELECTRA INC., Columbia Rd., MORRISTOWN, N.J. 07960, Tel. (201) 539-2000.  
(Passive Devices & Electromechanical Devices) CENTRALAB INC., 5855 N. Glen Park Rd., MILWAUKEE, WI 53201, Tel. (414)228-7380.  
(IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 739-7700.

**Uruguay:** LUZILETRON S.A., Avda Uruguay 1287, P.O. Box 907, MONTEVIDEO, Tel. 91 43 21.

**Venezuela:** IND. VENEZOLANAS PHILIPS S.A., c/o MAGNETICA S.A., Calle 6, Ed. Las Tres Jotas, App. Post. 78117, CARACAS, Tel. (02) 239 39 31

**For all other countries apply to:** Philips Electronic Components and Materials Division, International Business Relations, Building BAE, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Tel. +31 4072 33 04, Telex 35000 phtcl