



FIELD TELEPHONE, LB OPERATION, TA-312/PT

DISTRIBUTION: US Army Training Aids Centers.

HEADQUARTERS, DEPARTMENT OF THE ARMY
FEBRUARY 1981

A

OPERATION USING PHONE

1. When making call, turn hand crank
2. Pick up handset
3. Press to talk & release to listen
4. After completing conversation, replace handset
5. Turn crank (to signal "end of call")

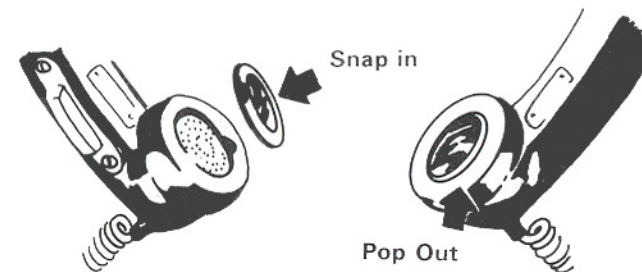
B

DAILY CHECKS

1. Clean unit (dust cloth or soft brush)
2. Check battery compartment for corrosion (brush or scrape)
3. Test batteries

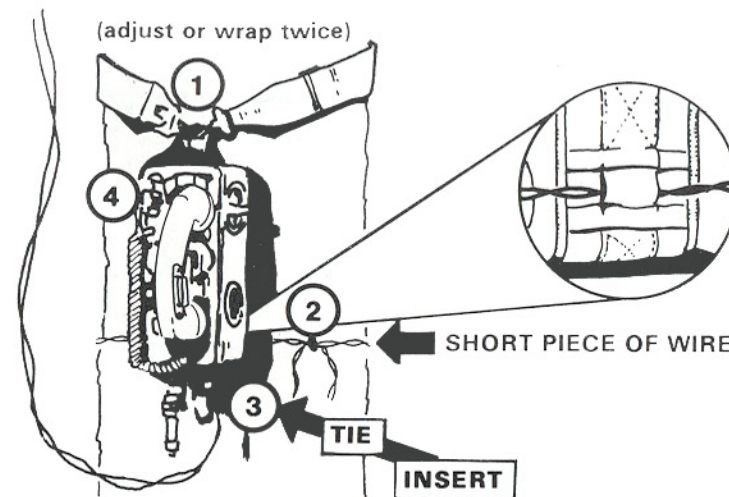
C

DEICING SCREEN



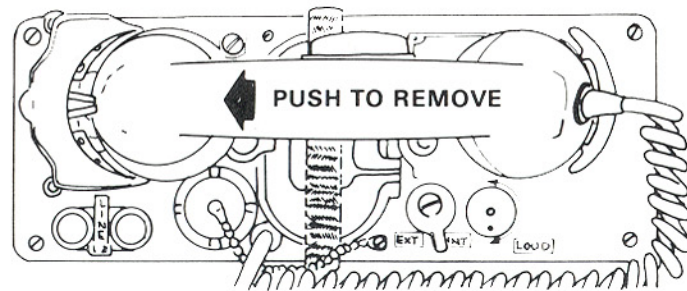
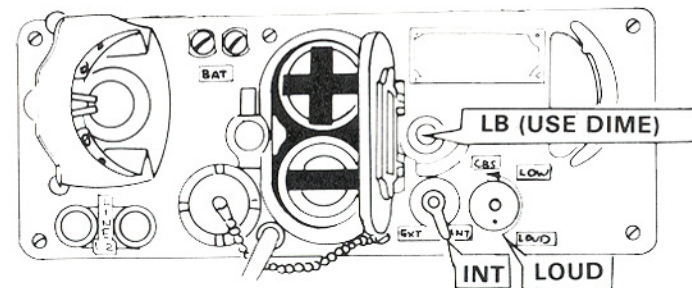
D

TREE OR POST INSTALLATION

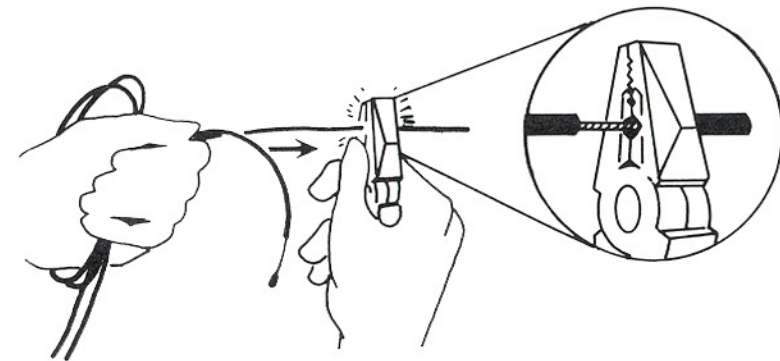
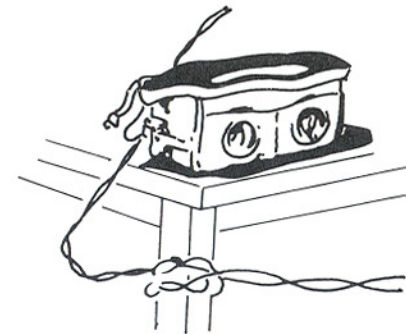


REFERENCES: CM/SM
36K1/2

TASK NO:
113-600-1001
113-600-2001

STEP ①**REMOVE
HANDSET****STEP ②****SET THE 3 SWITCHES
AND INSTALL BATTERIES****STEP ③****TEST BATTERIES
AND HANDSET**

1. Close battery cover.
2. Press switch on side of handset
3. Say into handset. "TEST-TEST"
4. If you do not hear yourself, install new batteries
5. If still not working, tell supervisor.

STEP ④**PREPARE WIRE****STEP ⑤****SECURE AND
ATTACH LINE**

1. **SECURE** to table leg (or stake)
2. **TIE** to D-ring
3. **INSERT** wire through hole in case under zipper (continued)

STEP ⑥**TEST GENERATOR
AND BUZZER**

1. Turn crank on side several times
2. Pick up handset and listen for operator
3. Say "RING BACK" and replace handset
4. Listen for buzzer