

PHILIPS

Data handbook



Electronic
components
and materials

Components and materials

Book C3

1986

Loudspeakers

LOUDSPEAKERS

	<i>page</i>
General	
Introduction	2
Choice of type	3
Selection tables	4
Conversion list	9
Terms and definitions	13
Test method and measurements	15
Procedure for inspecting	21
Type number system	24
Device data	25

DATA HANDBOOK SYSTEM

Our Data Handbook System comprises more than 60 books with specifications on electronic components, subassemblies and materials. It is made up of four series of handbooks:

ELECTRON TUBES	BLUE
SEMICONDUCTORS	RED
INTEGRATED CIRCUITS	PURPLE
COMPONENTS AND MATERIALS	GREEN

The contents of each series are listed on pages iv to viii.

The data handbooks contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

When ratings or specifications differ from those published in the preceding edition they are indicated with arrows in the page margin. Where application information is given it is advisory and does not form part of the product specification.

Condensed data on the preferred products of Philips Electronic Components and Materials Division is given in our Preferred Type Range catalogue (issued annually).

Information on current Data Handbooks and on how to obtain a subscription for future issues is available from any of the Organizations listed on the back cover.

Product specialists are at your service and enquiries will be answered promptly.

ELECTRON TUBES (BLUE SERIES)

The blue series of data handbooks comprises:

- T1 Tubes for r.f. heating**
- T2a Transmitting tubes for communications, glass types**
- T2b Transmitting tubes for communications, ceramic types**
- T3 Klystrons**
- T4 Magnetrons for microwave heating**
- T5 Cathode-ray tubes**
Instrument tubes, monitor and display tubes, C.R. tubes for special applications
- T6 Geiger-Müller tubes**
- T8 Colour display systems**
Colour TV picture tubes, colour data graphic display tube assemblies, deflection units
- T9 Photo and electron multipliers**
- T10 Plumbicon camera tubes and accessories**
- T11 Microwave semiconductors and components**
- T12 Vidicon and Newvicon camera tubes**
- T13 Image intensifiers and infrared detectors**
- T15 Dry reed switches**
- T16 Monochrome tubes and deflection units**
Black and white TV picture tubes, monochrome data graphic display tubes, deflection units

SEMICONDUCTORS (RED SERIES)

The red series of data handbooks comprises:

- S1 Diodes**
Small-signal silicon diodes, voltage regulator diodes ($< 1,5 \text{ W}$), voltage reference diodes, tuner diodes, rectifier diodes
- S2a Power diodes**
- S2b Thyristors and triacs**
- S3 Small-signal transistors**
- S4a Low-frequency power transistors and hybrid modules**
- S4b High-voltage and switching power transistors**
- S5 Field-effect transistors**
- S6 R.F. power transistors and modules**
- S7 Surface mounted semiconductors**
- S8a Light-emitting diodes**
- S8b Devices for optoelectronics**
Optocouplers, photosensitive diodes and transistors, infrared light-emitting diodes and infrared sensitive devices, laser and fibre-optic components
- S9 Power MOS transistors**
- S10 Wideband transistors and wideband hybrid IC modules**
- S11 Microwave transistors**
- S12 Surface acoustic wave devices**
- S13 Semiconductor sensors**

INTEGRATED CIRCUITS (PURPLE SERIES)

The purple series of data handbooks comprises:

EXISTING SERIES

Superseded by:

IC1	Bipolar ICs for radio and audio equipment	IC01N
IC2	Bipolar ICs for video equipment	IC02Na and IC02Nb
IC3	ICs for digital systems in radio, audio and video equipment	IC01N, IC02Na and IC02Nb
IC4	Digital integrated circuits CMOS HE4000B family	
IC5	Digital integrated circuits – ECL ECL10 000 (GX family), ECL100 000 (HX family), dedicated designs	IC08N
IC6	Professional analogue integrated circuits	IC03N and Supplement to IC11N
IC7	Signetics bipolar memories	
IC8	Signetics analogue circuits	IC11N
IC9	Signetics TTL logic	IC09N and IC15N
IC10	Signetics Integrated Fuse Logic (IFL)	IC13N
IC11	Microprocessors, microcomputers and peripheral circuitry	IC14N

NEW SERIES

IC01N	Radio, audio and associated systems Bipolar, MOS	(published 1985)
IC02Na	Video and associated systems Bipolar, MOS Types MAB8031AH to TDA1524A	(published 1985)
IC02Nb	Video and associated systems Bipolar, MOS Types TDA2501 to TEA1002	(published 1985)
IC03N	Integrated circuits for telephony	(published 1985)
IC04N	HE4000B logic family CMOS	
IC05N	HE4000B logic family – incased ICs CMOS	(published 1984)
IC06N*	High-speed CMOS; PC74HC/HCT/HCU Logic family	(published 1986)
IC07N	High-speed CMOS; PC54/74HC/HCT/HCU – uncased ICs Logic family	
IC08N	ECL 10K and 100K logic families	(published 1984)
IC09N	TTL logic series	(published 1984)
IC10N	Memories MOS, TTL, ECL	
IC11N	Linear LSI	(published 1985)
Supplement to IC11N	Linear LSI	(published 1986)
IC12N	Semi-custom gate arrays & cell libraries ISL, ECL, CMOS	
IC13N	Semi-custom Integrated Fuse Logic	(published 1985)
IC14N	Microprocessors, microcontrollers & peripherals Bipolar, MOS	(published 1985)
IC15N	FAST TTL logic series	(published 1984)

Note

Books available in the new series are shown with their date of publication.

* Supersedes the IC06N 1985 edition and the Supplement to IC06N issued Autumn 1985.

COMPONENTS AND MATERIALS (GREEN SERIES)

The green series of data handbooks comprises:

- C1 Programmable controller modules**
PLC modules, PC20 modules
- C2 Television tuners, coaxial aerial input assemblies, surface acoustic wave filters**
- C3 Loudspeakers**
- C4 Ferroxcube potcores, square cores and cross cores**
- C5 Ferroxcube for power, audio/video and accelerators**
- C6 Synchronous motors and gearboxes**
- C7 Variable capacitors**
- C8 Variable mains transformers**
- C9 Piezoelectric quartz devices**
- C10 Connectors**
- C11 Non-linear resistors**
- C12 Potentiometers, encoders and switches**
- C13 Fixed resistors**
- C14 Electrolytic and solid capacitors**
- C15 Ceramic capacitors**
- C16 Permanent magnet materials**
- C17 Stepping motors and associated electronics**
- C18 Direct current motors**
- C19 Piezoelectric ceramics**
- C20 Wire-wound components for TVs and monitors**
- C21* Assemblies for industrial use**
HNIL FZ/30 series, NORbits 60-, 61-, 90-series, input devices
- C22 Film capacitors**

* To be issued shortly

GENERAL

INTRODUCTION

The data are presented -whenever possible- according to a "format", in which the following items may be stated:

Title

- APPLICATION
- TECHNICAL DATA
- DIMENSIONS IN MM
- AVAILABLE VERSIONS
- FREQUENCY RESPONSE CURVES

Besides APPLICATION other particulars may be stated, relating to frame, cone, surround (suspension or rim), gaskets, magnetic compensation and recommended enclosure.

TECHNICAL DATA include:

version

.....

Rated impedance	Ω
Voice coil resistance	Ω
Rated frequency range	Hz
Resonance frequency	Hz
Cross-over frequency (. . dB/octave slope)	Hz
Distortion	%
Power handling capacity, measured without filter, loudspeaker unmounted	W
Max. power on loudspeaker	W
Operating power (sound level . . . dB, . . . m)	W
Sweep voltage (. . . to Hz)	V
Filter	
Characteristic sensitivity	dB
Energy in air gap	mJ
Flux density	T
Force factor (B x l) at 1 A	Wb/m
Piston diameter	m
Piston area	m ²
Total moving mass	kg
Compliance, loudspeaker unmounted	m/N
Equivalent box-volume	l
Quality factor, loudspeaker unmounted or mounted in recommended volume,	
mechanical	
electrical	
total	
Air-gap height	mm
Air-gap length	mm
Voice-coil height	mm
Rated core diameter	mm
Rated coil diameter	mm
Magnet material	
diameter	mm
mass	kg
Mass of loudspeaker	kg
Magnetic stray field according to	mT
Connection	

DIMENSIONS, in mm (unless otherwise indicated), are shown in a drawing giving the front or rear view of the speaker and a side view, the upper half of which is usually drawn as a cross section.

AVAILABLE VERSIONS include the type number (AD . . .), and the catalogue number which is to be used for ordering. Where applicable the standard packing quantity is also mentioned.

FREQUENCY RESPONSE CURVES of the loudspeakers, mounted on an IEC baffle show the sound pressure as a function of frequency. These frequency response curves are reproduced in such a way that they can be directly compared with Bruel & Kjaer recording charts QP1124.

CHOICE OF TYPE

It is essential to choose the correct loudspeaker for adequate acoustic results from electro-acoustic equipment.

The following factors should be considered when choosing a loudspeaker:

- shape, size and attachment with reference to the available space;
- quality and sensitivity, a compromise between fidelity of reproduction and price;
- the frequency response characteristic in relation to the kind of application;
- impedance and power handling capacity, which should be adapted to the output stage of the equipment.
- appearance and finish.

To assist customers in making their choice, our loudspeakers have been divided into the following groups:

- tweeter loudspeakers
- squawker loudspeakers
- woofer loudspeakers
- full range loudspeakers

A further selection may be made on the basis of operating power or characteristic sensitivity. High power speakers include top quality woofers, squawkers and tweeters for use in special combinations with appropriate filters and enclosures. Their excellent sound reproduction conforms in every respect to the high-fidelity standards IEC 268 and DIN 45 500. The system power handling capacity is from 10 to 250 W, the latter for theatre and outdoor applications. Full range high power loudspeakers are also available. These speakers also conform to IEC 268 and DIN 45 500 but have been designed to meet somewhat less stringent requirements. They are specially for juke boxes, musical instruments, monitoring and public address systems.

Medium power loudspeakers can be subdivided according to the application into round and oval versions, usually for radio, audio and television. For the latter application types with screened and/or compensated magnet systems are available.

Low power types are mainly used in small radios, intercoms and portable television.

SELECTION TABLES

The loudspeakers are divided into groups as shown in the survey below. *Conversion of catalogue number to type number is given in the list following this survey.* All loudspeakers are equipped with ceramic magnets unless otherwise indicated in the column "core diameter".

TWEETER LOUDSPEAKERS

basic part of type number	impedance Ω	resonance frequency Hz	core diameter mm	power handling capacity W	max. dimensions			page
					flange		mounting depth mm	
					inch	mm		
AD00972/T4	4	2100	18 RE	10	3/4	35 ϕ	11	25
AD01700/T8	8	2000	10	20	2	54 ϕ	13	28
AD11700/T8						64 \square		
AD11400/T.	4/8	1500	25	6	1	82 \square	27,7	77
AD11410/T.								
AD11430/T.	4/8	1000	25	3,5	1	82 \square	40,1	81
AD11600/T.	4/8	1300	25	6	1	96 \square	33,6	84
AD11610/T.	4/8	1300	25	6	1	96 \square	33,6	87
AD11800/T.	4/8	1700	25	4	1	75 \square	25	90
AD11810/T.	4/8	1600	25	4	1	75 \square	25	93
AD11830/T.	4/8	1000	25	4	1	75 \square	37,4	96
AD20303/T.	4/8/15	2500	14,5	4	2	55 ϕ	21	123
AD22303/T.						66 \square	23	123
AD20311/T.	4/8/15	2500	14,5	4	2	55 ϕ	30	127
AD22311/T.						66 \square	32	127
AD20851/T.	4/8/15	2400	14,5	4	2	55 ϕ	24	135
AD22851/T.						66 \square	26	135
AD21600/RT8	8	—	—	10	—	134/118	44	139

RE = rare earth; ϕ = diameter; \square = square.

SQUAWKER LOUDSPEAKERS

basic part of type number	impedance Ω	resonance frequency Hz	core diameter mm	power handling capacity W	max. dimensions			page
					flange		mounting depth mm	
					inch	mm		
AD02110/Sq.	4/8	340/360	50	30	2	134 □	103	41
AD02150/Sq.	4/8	340/360	50	30	2	134 □	98	44
AD02170/Sq8	8	640	50	25	3	134 □	88	47
AD33303/Sq.	4/8/15	950	14,5	5	3	97 □	32	154
AD33851/Sq.	4/8	950	14,5	5	3	97 □	34	157
AD50600/Sq.	4/8	260	25	20	5	129	107	277
AD50800/Sq.	4/8	280	18	15	5	129	107	289

WOOFER LOUDSPEAKERS

AD10202/W8	8	26	50	80	10	258	116	65
AD10252/W6	6	27	50	100	10	258	118,5	68
AD10602/W8	8	31	25	40	10	258	105	71
AD10672/W8	8	27	35	60	10	258	109,5	74
AD12202/W8	8	24	50	80	12	311	118,6	105
AD12252/W8	8	27	50	100	12	311	120	113
AD12672/W8	8	26	35	60	12	311	114,5	119
AD36510/W4	4	68	18	15	3 x 6	80 x 160	62,4	181
AD36900/P.	4/8/15	95	18	8	3 x 6	80 x 160	59	196
AD36900/W.	4/8	75	18	8	3 x 6	80 x 160	59	199
AD38903/P.	8/15	95	18	8	3 x 8	81,6 x 204,6	61	206
AD40501/W.	4/8	72	25	20	4	102 ϕ	59,5	212
AD44900/P.	4/8/15	110	18	8	4	102 □	56	237
AD44900/W4	4	65	18	8	4	102 □	56	240
AD44901/W4								
AD51502/W4M	4	70	25	20	5 1/4	130 □	68,5	295
AD51610/W.	4/8	62	25	30	5 1/4	130 □	57,7	298
AD51800/W4	4	85	18	15	5 1/4	130 □	56,1	301
AD70400/W8	8	74	18	30	7	165,2 ϕ	58	311
AD70604/W4	4	48	25	40	7	165,2 ϕ	60	314
AD70804/W.	4/8	86	18	20	7	166 ϕ	66,5	329
AD70805/W8	8	74	18	25	7	165,2 ϕ	66,5	333
AD80110/W.	6/8	40	35	60	8	204 ϕ	94	345
AD80400/W8	8	62	18	40	8	205 ϕ	75,6	349
AD80405/W8	8	50	25	35	8	204 ϕ	81	352
AD80602/W.	4/8	42	25	50	8	204 ϕ	85,6	355
AD80605/W6	6	50	25	40	8	204 ϕ	79	358
AD80606/W.	4/6/8	36/40/38	25	50	8	204 ϕ	84	361
AD80609/W6	6	43	25	50	8	204 ϕ	88,5	364
AD80612/W8	8	47	25	50	8	204 ϕ	88,5	367
AD80652/W.	4/8	39	25	50	8	204 ϕ	87,6	370
AD80680/W8	8	35	35	55	8	204 ϕ	91	373
AD80681/W.	4/8	48/47	35	50	8	200	90	376
AD80800/W4	4	52	18	25	8	194 ϕ	77,6	384

ϕ = diameter; □ = square.

GENERAL

FULL RANGE LOUDSPEAKERS

basic part of type number	impedance Ω	resonance frequency Hz	core diameter mm	power handling capacity W	max. dimensions			page
					flange		mounting depth mm	
					inch	mm		
AD01750/Y.	8	430	10	0,3	1½	38 ϕ	7,3	31
AD01980/Y.	8/15/25	600	14,5 RE	0,3	1,33	34 ϕ	5	34
AD01985/Y.	8/15/25	600	14,5 RE	0,3	1,5	36 ϕ	5	37
AD2071/Z.	4/8/15/25/150	360	10	1	2,5	64 ϕ	19,7	50
AD3071/Y.	4/8/15/25/150	250	10	2	3	81 ϕ	23	53
AD3371/Y.						81 \square		
AD4072/X.								
AD4472/X.	4/8/15/25	170	10	3	4	105 ϕ	30,5	57
AD4074/X.	4/8/15/25	170	10	2,5	4	105 ϕ	44	61
AD4474/X.								
AD12202/M.	4/8	45	35	100	12	312,4 ϕ	135	99
AD12202/P8	8	45	35	100	12	312,4 ϕ	135	102
AD12252/HP.	4/8	55	50	150	12	312,4 ϕ	152	109
AD12672/MP.	4/8	45	35	60	12	311	137,8	115
AD20750/Y8	8	350	10	0,3	2	50	15,6	131
AD24370/X15	15	165	12	4	2 x 3,5	56 x 96	47	142
AD26313/X25	25	155	14,5	5	2 x 6	57 x 160	48	145
AD26921/X.	4/8/15/25	155	14,5	5	2 x 6	57 x 160	50	148
AD26951/X25	25	155	14,5	5	2 x 6	57 x 160	45,5	151
AD33910/X4	4	85	18	12	3	87,2 \square	43,3	160
AD35720/X.	4/8/15/25	160	10	3	3 x 5	75 x 130	35	163
AD35740/X.							47	
AD35721/X.							35	
AD35741/X1	4/8/15/25	160	10	2,5	3 x 5	75 x 130	47	166
AD35722/X.	4/8/15/25	160	10	3	3 x 5	75 x 130	35	169
AD35741/X.							47	
AD35725/X.							35	
AD35746/X.	4/8/15/25	160	10	5	3 x 5	75 x 130	47	172
AD35726/X.	4/8/15/25	160	10	5	3 x 5	75 x 130	35	175
AD35747/X.							47	
AD35727/X.							35	
AD35748/X.	4/8/15/25	160	10	5	3 x 5	75 x 130	47	178
AD36720/X.	4/8/15/25	130	10	3	3 x 6	80 x 160	45	184
AD36740/X.							55	
AD36722/X.							45	
AD36742/X.	4/8/15/25	130	10	3	3 x 6	80 x 160	55	187
AD36725/X.	4/8/15/25	130	10	5	3 x 6	80 x 160	45	190
AD36746/X.							55	
AD36727/X.							45	
AD36748/X.	4/8/15/25	130	10	4,5	3 x 6	80 x 160	55	193
AD36901/X.	8/15	95	18	8	3 x 6	80 x 160	57,6	203
AD38903/X.	418	95	18	8	3 x 8	80 x 204	61	210

RE = rare earth; ϕ = diameter.

FULL RANGE LOUDSPEAKERS

basic part of type number	impedance Ω	resonance frequency Hz	core diameter mm	power handling capacity W	max. dimensions			page
					flange		mounting depth mm	
					inch	mm		
AD40725/X.	4/8/15/25	170	10	5	4	105 ϕ	30,5	215
AD40745/X.							44	
AD40880/X.	4/8	150	14,5	6	4	102 ϕ	40,5	218
AD44322/X.	4/8/15	170	14,5	4	4	102 \square	39,1	221
AD44400/M4	4	110	18	15	4	102 \square	52,2	224
AD44401/M4								
AD44725/X.	4/8/15/25	170	10	5	4	105 ϕ	30,5	227
AD44745/X.							44	
AD44830/X.	4/8	140	18	8	4	102 \square	42,7	231
AD44880/X.	4/8	150	14,5	6	4	102 \square	40,5	234
AD44900/X.	4/8/15/25	90	18	8	4	102 \square	56	243
AD44901/X.								
AD46720/X.	4/8/15/25	130	10	4	4 x 6	102 x 154	44	246
AD46740/X.							56	
AD46721/X.	4/8/15/25	130	10	5	4 x 6	102 x 154	44	249
AD46741/X.							56	
AD46722/X.	4/8/15/25	130	10	5	4 x 6	102 x 154	44	252
AD46742/X.							56	
AD46725/X.	4/8/15/25	130	10	5	4 x 6	102 x 154	44	255
AD46746/X.							56	
AD46726/X.	4/8/15/25	130	10	5	4 x 6	102 x 154	44	258
AD46747/X.							56	
AD46727/X.	4/8/15/25	130	10	5	4 x 6	102 x 154	44	261
AD46748/X.							56	
AD46801/X4	4	120	18	8	3,5 x 6	96 x 155	49,8	264
AD46810/X4	4	140	18	6	3,5 x 6	96 x 155	38	267
AD46900/M.	4/8/15	150	18	6	4 x 6	102 x 154	54	271
AD46951/X.	8/15/25	130	14,5	6	4 x 6	102 x 154	52	274
AD50720/X.	4/8/15/25	130	10	3	5,¼	131 ϕ	43	280
AD50740/X.							55	
AD50725/X.	4/8/15/25	130	10	5	5,¼	131 ϕ	43	283
AD50745/X.							55	
AD50800/X.M	4/8	140	18	6	5	120 ϕ	48,5	286
AD51410/M4	4	90	18	15	5,¼	130 ϕ	57	292
AD55720/X.	4/8/15/25	130	10	3	5,¼	131 ϕ	43	304
AD55740/X.							55	
AD55725/X.	4/8/15/25	130	10	5	5,¼	131	43	307
AD55745/X.							55	
AD70631/M4	4	60	25	15	7	156 ϕ	67,5	317

Table continues on next page.

ϕ = diameter; \square = square.

GENERAL

FULL RANGE LOUDSPEAKERS (continued)

basic part of type number	impedance Ω	resonance frequency Hz	core diameter mm	power handling capacity W	max. dimensions			page
					flange		mounting depth mm	
					inch	mm		
AD70720/X. AD70740/X.)	4/8/15/25	100	10	5	7	160 ϕ	46	320
58								
AD70725/X. AD70745/X.)	4/8/15/25	100	10	5	7	160 ϕ	46	323
58								
AD70800/X,M	4/8	100/105	18	12/13	7	165 Δ	63,5	326
AD70850/X,M	4/8	105	14,5	7	7	165 Δ	61,5	325
AD77720/X. AD77740/X.)	4/8/15/25	100	10	5	7	160 ϕ	46	339
58								
AD77725/X. AD77745/X.)	4/8/15/25	100	10	5	7	160 ϕ	46	342
58								
AD80800/MP. 9710/M8	4/8 8	85/75 50	18 34	10/13 20	8 8½	205 Δ 217 ϕ	73,6 94	379 386

Note

Loudspeakers are ordered by their 12 digit catalogue number, such as e.g. 2422 257 53135. (type AD33851/Sq4). The type number is explained on page 24; the 12 digit numbers cannot be "read" since they are fixed in a numerical order. However the 11th digit refers to the packing of the loudspeakers. It can either be 0, 1, 2 or 3. The figures 0 and 1 are only applicable for **unpacked** loudspeakers 2 and 3 are for bulk-packed loudspeakers. Since we do not deliver unpacked speakers there will always be a 2 or 3 on the box and on the invoices etc. whilst the individual speakers will be stamped 0 or 1 respectively. So, referring to the above example, the individual loudspeakers will be marked 2422 257 53115 and on the box 2422 257 53135 (AD33851/Sq4).

To easify the conversion from "unpacked" 12 digit number to type number please consult the following table.

ϕ = diameter, Δ = octagonal.

CONVERSION LIST

Conversion of catalogue number stamped on loudspeaker to type number. See relevant data sheet for ordering number.

catalogue number	type number	page
2403 256 12401	AD01985/Y25	38
12402	Y15	38
12403	Y8	38
12501	AD01980/Y25	35
12502	Y15	35
12503	Y8	35
2403 257 20001	AD35720/X4	164
20002	X8	164
20003	X15	164
20004	X25	164
20101	AD35740/X4	164
20102	X8	164
20103	X15	164
20104	X25	164
20201	AD35721/X4	167
20202	X8	167
20203	X15	167
20204	X25	167
20301	AD35741/X4	167
20302	X8	167
20303	X15	167
20304	X25	167
20401	AD35722/X4	170
20402	X8	170
20403	X15	170
20404	X25	170
20501	AD35742/X4	170
20502	X8	170
20503	X15	170
20504	X25	170
23501	AD3371/Y4	54
23502	Y8	54
23503	Y15	54
23504	Y25	54
23505	Y50	54
23506	Y150	54
23601	AD3071/Y4	54
23602	Y8	54
23603	Y15	54
23604	Y25	54
23605	Y50	54
23606	Y150	54
23801	AD2071/Z4	51
23802	Z8	51
23803	Z15	51
23804	Z25	51
23805	Z150	51
23806	Z50	51

catalogue number	type number	page
2403 257 24205	AD4072/X4	59
24206	X8	59
24207	X15	59
24208	X25	59
24305	AD4074/X4	63
24306	X8	63
24307	X15	63
24308	X25	63
24705	AD4474/X4	63
24706	X8	63
24707	X15	63
24708	X25	63
24805	AD4472/X4	59
24806	X8	59
24807	X15	59
24808	X25	59
25101	AD50720/X4	281
25102	X8	281
25103	X15	281
25104	X25	281
25201	AD50740/X4	281
25202	X8	281
25203	X15	281
25204	X25	281
25801	AD55740/X4	305
25802	X8	305
25803	X15	305
25804	X25	305
25901	AD55720/X4	305
25902	X8	305
25903	X15	305
25904	X25	305
26001	AD36720/X4	185
26002	X8	185
26003	X15	185
26004	X25	185
26101	AD36740/X4	185
26102	X8	185
26103	X15	185
26104	X25	185
26401	AD36722/X4	188
26402	X8	188
26403	X15	188
26404	X25	188
26501	AD36742/X4	188
26502	X8	188
26503	X15	188
26504	X25	188

GENERAL

catalogue number	type number	page
2403 257 27101	AD70720/X4	321
	X8	321
	X15	321
	X25	321
	AD70740/X4	321
	X8	321
	X15	321
	X25	321
	AD77740/X4	340
	X8	340
	X15	340
	X25	340
	AD77720/X4	340
	X8	340
	X15	340
	X25	340
	AD46720/X4	247
	X8	247
	X15	247
	X25	247
	AD46740/X4	247
	X8	247
	X15	247
	X25	247
	AD46721/X4	250
	X8	250
	X15	250
	X25	250
	AD46741/X4	250
	X8	250
	X15	250
	X25	250
	AD46722/X4	253
	X8	253
	X15	253
	X25	253
	AD46742/X4	253
	X8	253
	X15	253
	X25	253
	AD01700/T8	28
	AD11700/T8	28
	AD35725/X4	173
	X8	173
	X15	173
	X25	173
	AD35746/X4	173
	X8	173
	X15	173
	X25	173
	AD35726/X4	176
	X8	176
	X15	176
	X25	176

catalogue number	type number	page
2403 257 50301	AD35747/X4	176
	X8	176
	X15	176
	X25	176
	AD35727/X4	179
	X8	179
	X15	179
	X25	179
	AD35748/X4	179
	X8	179
	X15	179
	X25	179
	AD40725/X4	216
	X8	216
	X15	216
	X25	216
	AD40745/X4	216
	X8	216
	X15	216
	X25	216
	AD44745/X4	228
	X8	228
	X15	228
	X25	228
	AD44725/X4	228
	X8	228
	X15	228
	X25	228
	AD50725/X4	284
	X8	284
	X15	284
	X25	284
	AD50745/X4	284
	X8	284
	X15	284
	X25	284
	AD55745/X4	308
	X8	308
	X15	308
	X25	308
	AD55725/X4	308
	X8	308
	X15	308
	X25	308
	AD36725/X4	191
	X8	191
	X15	191
	X25	191
	AD36746/X4	191
	X8	191
	X15	191
	X25	191

catalogue number	type number	page
2403 257 56401	AD36727/X4	194
56402	X8	194
56403	X15	194
56404	X25	194
56501	AD36748/X4	194
56502	X8	194
56503	X15	194
56504	X25	194
57101	AD70725/X4	324
57102	X8	324
57103	X15	324
57104	X25	324
57201	AD70745/X4	324
57202	X8	324
57203	X15	324
57204	X25	324
57801	AD77745/X4	343
57802	X8	343
57803	X15	343
57804	X25	343
57901	AD77725/X4	343
57902	X8	343
57903	X15	343
57904	X25	343
59001	AD46725/X4	256
59002	X8	256
59003	X15	256
59004	X25	256
59101	AD46746/X4	256
59102	X8	256
59103	X15	256
59104	X25	256
59201	AD46726/X4	259
59202	X8	259
59203	X15	259
59204	X25	259
59301	AD46747/X4	259
59302	X8	259
59303	X15	259
59304	X25	259
59401	AD46727/X4	262
59402	X8	262
59403	X15	262
59404	X25	262
59501	AD46748/X4	262
59502	X8	262
59503	X15	262
59504	X25	262
2404 257 32402	AD02170/Sq8	47
2422 256 35502	AD00972/T4	26

catalogue number	type number	page
2422 257 20201	AD46810/X4	268
20211	AD46801/X4	265
20406	AD46951/X8	275
20407	X15	275
20408	X25	275
20411	AD46900/M4	272
20412	M8	272
20413	M15	272
24413	AD24370/X15	144
24711	AD44322/X4	222
24712	X8	222
24713	X15	222
25101	AD50800/X4	287
25102	X8	287
25105	M4	287
25106	M8	287
27202	AD70400/W8	313
27901	AD70804/W4	330
27902	W8	330
27904	AD70805/W8	334
28102	AD80405/W8	353
28202	AD80400/W8	
28204	AD80400/W8	351
29001	AD36510/W4	182
29005	AD36900/W4	200
29006	W8	200
29101	AD36900/P4	197
29102	P8	197
29103	P15	197
29202	AD36901/X8	204
29203	X15	204
29309	AD26951/X25	152
29311	AD26921/X4	149
29312	X8	149
29313	X15	149
29314	X25	149
29404	AD26313/X25	146
31404	AD12672/W8	121
31508	AD12202/W8	107
31606	AD10602/W8	73
31704	AD10672/W8	76
31807	AD10202/W8	67
31906	AD10252/W6	70
32201	AD02110/Sq4	41
32202	Sq8	41
32301	AD02150/Sq4	44
32302	Sq8	44
32605	AD20303/T4	125
32606	T8	125
32607	T15	125

GENERAL

catalogue number	type number	page
2422 257 32615	AD22303/T4	125
32616	T8	125
32617	T15	125
32705	AD20311/T4	129
32706	T8	129
32707	T15	129
32715	AD22311/T4	129
32716	T8	129
32717	T15	129
34512	AD33910/X4	161
34703	AD40501/W4	213
34704	W8	213
35801	AD51610/W4	299
35802	W8	299
35806	AD51800/W4	303
35913	AD51502/W4M	296
38705	AD80800/M4	380
38706	M8	380
38715	P4	380
38805	AD80800/W4	385
40401	AD38903/X4	210
40402	X8	210
40404	AD38903/P8	207
40405	P15	207
41104	AD12672/M4	116
41105	M8	116
41106	P4	116
42005	AD20851/T4	137
42006	T8	137
42007	T15	137
42015	AD22851/T4	137
42016	T8	137
42017	T15	137
43301	AD11800/T4	91
43302	T8	91
43304	AD11810/T4	94
43305	T8	94
43307	AD11830/T4	97
43308	T8	97
43401	AD11400/T4	78
43402	T8	78
43404	AD11410/T4	78
43405	T8	78
43407	AD11430/T4	82
43408	T8	82
43501	AD11600/T4	85
43502	T8	85
43504	AD11610/T4	88
43505	T8	88
44111	AD44401/M4	225
44201	AD44900/X4	245
44205	AD44900/W4	241
44211	AD44901/X4	245
44215	AD44901/W4	241

catalogue number	type number	page
2422 257 44305	AD44900/P4	238
44306	P8	238
44307	P15	238
44401	AD40880/X4	219
44402	X8	219
44411	AD44880/X4	235
44412	X8	235
44511	AD44380/X4	232
44512	X8	232
45001	AD50600/Sq4	278
45002	Sq8	278
45101	AD50800/Sq4	290
45102	Sq8	290
45501	AD51410/M4	294
47106	AD70631/M4	319
47113	AD70604/W4	316
47301	AD70850/X4	336
47302	X8	336
47311	AD70850/M4	336
47312	M8	336
47401	AD70800/X4	327
47402	X8	327
47405	M4	327
47406	M8	327
48101	9710/M8	387
48211	AD80606/W4	362
48212	W8	362
48218	W6	362
48305	AD80605/W6	359
48311	AD80602/W4	356
48312	W8	356
48314	AD80609/W6	365
48318	AD80612/W8	369
48511	AD80652/W4	371
48512	W8	371
48802	AD80110/W8	346
48804	W6	346
48902	AD80680/W8	374
50001	AD80681/W8	377
50003	W4	377
51103	AD12252/HP4	110
51104	HP8	110
51201	AD12202/M4	100
51202	M8	100
51204	P8	103
52002	AD21600/RT8	139
53111	AD33303/Sq4	156
53112	Sq8	156
53115	AD33851/Sq4	159
53116	Sq8	159
61004	AD12252/W8	114

TERMS AND DEFINITIONS

Unmounted: The loudspeaker is clamped in a set-up that does not influence its radiation characteristics.

Mounted in enclosure: The loudspeaker is front mounted in an enclosure of the dimensions specified on the data sheet.

Baffle: The loudspeaker is fitted to a baffle of the dimensions specified on the data sheet (flush mounted or front mounted).

Half free field: The acoustic conditions on the forward side approach those of free space.

Anechoic room: The acoustic conditions approach those of free space (IEC Publication 268, Part 5, Section 1).

Operating power: This is the sinewave power input to the loudspeaker which corresponds with a sound level

- of 74 dB at a microphone distance of 0,5 m for small low power speakers;
- of 90 dB at a microphone distance of 0,5 m for standard low power speakers;
- of 96 dB at a microphone distance of 1 m for medium and high power loudspeakers.

This sound level is the average level over the rated frequency range of the loudspeaker. 0 dB corresponds with 2×10^{-5} N/m².

Maximum power: The power of a continuous sinusoidal signal within the rated frequency range that the loudspeaker element or system can handle at an ambient temperature of 25 °C for ten minutes without any damage, e.g. either thermal or mechanical deformation.

Characteristic sensitivity: The sound pressure (level) in a stated frequency range referred to an input power of 1 W at a distance of 1 m on the reference axis. This characteristic sensitivity of 1W/1 m cannot be given for small low power speakers.

Compliance: The reciprocal of the axial stiffness of the total suspension.

TEST METHODS AND MEASUREMENTS

The atmospheric conditions for measurement are:

Temperature :	15 to 35 °C
Relative humidity :	45 to 75 %
Pressure :	860 to 1060 hPa

1 Impedance

The impedance is the modulus of the lowest value of the electrical impedance in the frequency range above the bass resonance frequency of the loudspeaker as determined by the method specified in 3 below.

1.1 Measuring apparatus

See under 3. In Fig. 1, $R = 1 \Omega$.

1.2 Conditions

- The loudspeaker is unmounted.
- The power input to the loudspeaker must not exceed 0,1 x the power-handling capacity as determined in 4 below.

1.3 Measuring result

Rated impedance is stated in the data sheets. The measured impedance should not be lower than 20% of the rated impedance.

2 Voice coil resistance

The voice coil resistance is the d.c. resistance of the voice coil.

2.1 Measuring apparatus

Low current d.c. ohmmeter.

2.2 Conditions

The d.c. power input to the loudspeaker must not exceed 0,1 x the power-handling capacity.

2.3 Measuring result

The rated resistance is given in the data sheets, tolerance $\pm 20\%$.

3 Resonance frequency

The resonance frequency is the frequency at which the modulus of the electrical impedance has its first principal maximum in an ascending scale, the electrical input being such as to have no significant effect on the resonance frequency.

3.1 Measuring apparatus

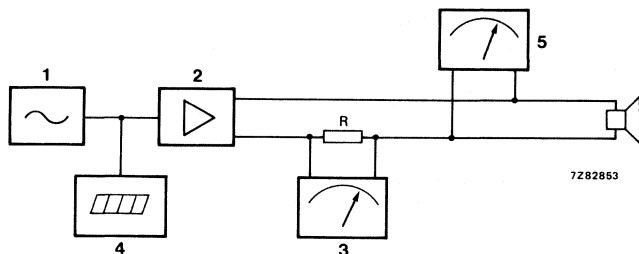


Fig. 1.

- | | |
|--|------------------|
| (1) Sinewave generator, Philips PM5126. | } or equivalents |
| (2) Power amplifier. | |
| (3) and (5) a.c. mV meter, Philips PM2454. | |
| (4) Frequency counter, Philips PM6620. | |

$R = 0,1 \Omega$.

3.2 Conditions

- the loudspeaker is unmounted.
- Resonance frequency is measured at least 24 hours after fabrication of the loudspeaker.
- No measurements or tests are carried out before measurement of the resonance frequency.
- Power on the loudspeaker: 1 W; for small low power speakers $0,1 \times$ the power handling capacity.

3.3 Measuring result

The resonance frequency is that frequency at which the voltmeter indicates the first minimum deflection as the frequency is swept slowly from 0 Hz.

The resonance frequency is stated in the data sheets, tolerance $\pm 15\%$.

4 Power handling capacity

The power handling capacity is the nominal power that the loudspeaker will satisfactorily handle as checked by an accelerated life test.

4.1 Measuring apparatus

- Generator supplying test signal in accordance with IEC Publication 268, Part 5, Section 9.3.
- Power amplifier with an output impedance not greater than $1/3$ of the rated impedance of the loudspeaker.
- Voltmeter indicating the r.m.s. value of the voltage.

4.2 Conditions

- A test voltage is applied to the loudspeaker for an uninterrupted period of 100 h. The r.m.s. value of this voltage corresponds to the specified power handling capacity of the loudspeaker.
- The test voltage has a frequency distribution corresponding to that of the output of a filter as specified in IEC Publication 268, Part 5, Section 9.3 when fed from a white noise source.
- If the loudspeaker is designed to operate in a restricted frequency range, the corresponding network (filter) connected to the loudspeaker during the test, is specified in the data sheet. The test voltage is measured at the input terminals of the network.

— The method of mounting is as specified in the data sheet.

4.3 Measuring result

To pass this test the loudspeaker has to function properly at the end of the test period. Deviation from the specified resonance frequency is allowed. Refer to 11 (Life test).

5. Total non-linear distortion

This is the ratio between the r.m.s. value of the harmonic content of the sound pressure to the total sound pressure over the frequency range of the loudspeaker.

The difference in dB between fundamentals and harmonics can be converted into a distortion percentage with the aid of following nomogram.

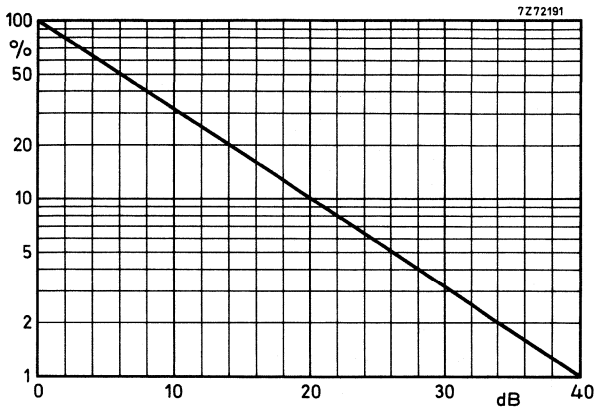


Fig. 2 Difference in dB converted into % distortion.

5.1 Measuring apparatus

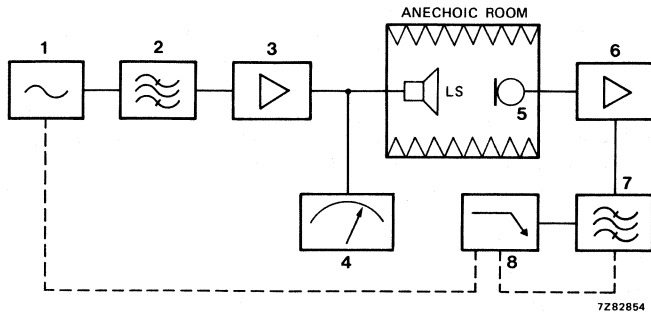


Fig. 3.

- | | |
|---|------------------|
| <ul style="list-style-type: none"> (1) Sinewave generator, Bruel & Kjaer, type 1027. (2) Bandpass filter, Krohn - Hite, type 3700. (3) Power amplifier, Bruel & Kjaer, type 2706. (4) Electronic voltmeter, Bruel & Kjaer, type 2425. (5) Microphone, Bruel & Kjaer, type 4145. (6) Measuring amplifier, Bruel & Kjaer, type 2608. (7) Bandpass filter set, Bruel & Kjaer, type 1615. (8) Level recorder, Bruel & Kjaer, type 2307. | } or equivalents |
|---|------------------|

5.2 Conditions

- The loudspeaker is mounted as specified in the data sheet.
- The power input to the loudspeaker is the operating power (see under Terms and Definitions).
- The microphone distance is 1 m unless otherwise specified in the data sheet.

5.3 Measuring result

The distortion curve for high power loudspeakers is given in the data sheet.

6 Sweep voltage

The sweep voltage test involves the loudspeaker receiving a sinusoidal test signal of specified constant amplitude. The frequency of this signal is swept through the specified frequency range.

6.1 Measuring apparatus

- Audio-frequency sinewave generator with a constant output voltage over the range from 0 to 20 000 Hz.
- Linear amplifier with an output power appropriate to the loudspeaker under test and an output impedance not greater than $1/3 \times$ the rated loudspeaker impedance. For power see 6.2.
- An electronic voltmeter with high input impedance.

6.2 Conditions

- The loudspeaker is unmounted.
- The input voltage is:
 - (a) for the *medium and low power range* such that the power input to the loudspeaker is 0,5 x the specified power handling capacity.
 - (b) for the *high power range* as specified in the data sheets.
- If the loudspeaker is designed to operate in a restricted frequency range, the corresponding network (filter) is connected to the loudspeaker during the test, is specified in the data sheet. The test voltage is measured at the input terminals of the network.

6.3 Measuring result

The sound reproduction must be correct and undistorted. (The faults can be classified according to the fault list mentioned in 'Procedure of inspection for loudspeakers').

7 Flux density

This is the magnetic flux density measured in the air gap.

7.1 Measuring apparatus

- Differential search coil pair.
- Galvanometer.

7.2 Conditions

- The distance between the centres of the two coils is equal to the air-gap height minus 1 mm.
- The two coils are put into the air gap symmetrical with respect to the pole plate.

7.3 Measuring result

The minimum flux density as measured on production samples is stated in the data sheet.

8 Frequency response

The frequency response is the graph representing the sound pressure as a function of frequency when a constant sinewave signal is applied to the loudspeaker.

8.1 Measuring apparatus

- Microphone, Bruel & Kjaer, type 4131, 4145.
 - Microphone amplifier, Bruel & Kjaer, type 2606, 2607, 2608.
 - Cathode follower, Bruel & Kjaer, type 2619.
 - Sinewave random generator, Bruel & Kjaer, type 1024.
 - Level recorder, Bruel & Kjaer, type 2305, 2307.
- } or equivalents

The apparatus is set as follows:

- Writing speed, 125 mm/s
- Paper speed, 3 mm/s
- Range potentiometer, 50 dB
- Lower limiting frequency, 10 Hz
- Rectifier response, r.m.s.
- Writing width, 100 mm
- Compressor speed, 300 dB/s

8.2 Conditions

- Sinewave signal $V = \sqrt{P \cdot Z_r}$,

where:

for anechoic room measurements $P = 50$ mW, unless otherwise stated in the data sheets.

V = test voltage,

Z_r = rated impedance as specified in the data sheet.

- Microphone position: in axis of loudspeaker at a distance of 0,5 m for anechoic room measurements.

8.3 Measuring result

A description of the sensitivity and the frequency response curve(s) are given in the data sheet.

9 Direction of magnetization

The magnet is so magnetized that the centre-pole is *south* for systems with a ring magnet, and *north* for systems with a slug magnet.

10 Polarity

The cone of the loudspeaker will move outwards when a d.c. voltage is applied to the terminals so that the red terminal or + sign is positive. The voltage applied must not exceed the "sweep voltage".

11 Life test

11.1 Measuring apparatus

- Pink noise generator, Bruel & Kjaer, type 1405 or equivalent.
- Filter and limiting circuit.
- Emitter follower.
- Power amplifier.
- Electronic r.m.s. voltmeter, Bruel & Kjaer, type 2425 or equivalent.

For tests on tweeters and squawkers a high-pass filter, as mentioned in the data sheet for power handling capacity measurement, must be used between amplifier and speaker.

11.2 Conditions

The output of the generator must be adjusted so that the output peak voltage of the limiter is twice the r.m.s. value.

Voltage on the loudspeaker:

$$V_{rms} = \sqrt{P \cdot Z_r}$$

P = power handling capacity of the relevant loudspeaker.

Z_r = rated impedance as specified in the data sheet.

The loudspeaker will have been tested mounted in an enclosure, if it is mentioned in the relevant data sheet.

11.3 Measuring result

After 100 hours the speaker must still meet the requirements stated in the data sheet, except for the resonance frequency, which may be fall to 85% of its zero-hour value.

12 Climatic tests

test	procedure	recovery time	requirements
dry heat	7 days at + 70 °C, loudspeaker unloaded	4 h	no important changes in electrical, mechanical and acoustical properties, except for the resonance frequency
change of temperature	24 h at -25 °C loudspeaker 8 - 12 h at + 25 °C unloaded 24 h at + 70 °C 4 h at + 25 °C	—	
humidity cycle	12 h at + 45 °C, 85% R.H. 12 h at + 25 °C, 100% R.H., 21 days	4 h	
endurance	100 h at + 45 °C loudspeaker loaded with P.H.C. ref. IEC publ. 268-5-9	4 h	

PROCEDURE FOR INSPECTION

This procedure applies:

- for measuring the quality of loudspeakers lots, packed and ready for dispatch to a receiver/user.
- for batch acceptance.

It provides the specification of defects on loudspeakers after inspection by attributes. The types of inspection are: visual inspection, auditory inspection and several measurements. If necessary additional information can be laid down in the Specific Conditions of the Quality Agreement regarding to the deliveries between supplier and customer.

A *defect* is any non-conformance of the loudspeaker with its specified requirements.

A *major defect* is a defect that is likely to result in failure or to reduce materially the usability of the loudspeaker.

A *minor defect* is a defect that is not likely to reduce materially the usability of the loudspeaker, or is a departure from established standards having little bearing on the effective operation of the loudspeaker.

Main rules

All independent defects found during inspection must be used for quality evaluation. All epidemic defects must be taken into account.

When more defects appear from the same cause, only the most serious defect must be taken into account.

The evaluation must be within the limits of the specification of the loudspeaker and for unspecified characteristics must be related to an approval model or limit samples.

Expression of non-conformance

The extent of non-conformance can be expressed in one or more figures:

- one major and one minor figure for visual and auditory inspection together.
- separate major and minor figures for visual inspection, auditory inspection and measurements.

Acceptability of lots or batches

The AQLs, inspection level(s) and batch sizes are selected according to the specific conditions of the Quality Agreement between supplier and customer.

GENERAL

Visual inspection (workmanship and appearance)

Defects concerning packaging, labelling, and loose dirt or unusual material between the loudspeakers are not classified but reported separately.

Incorrect type or not identifiable type.

(Partly) missing, incorrect or unreadable marking.

Missing parts.

Missing plating/coating.

Partly missing plating/coating, or corrosion.

Missing connection/joint (soldering, gluing, screwing, riveting, pinning, sealing).

Missing or double polarity marking; incorrect polarity indication.

Short-circuit or chance of short-circuit

Tag terminal having poor solderability or plugability

Mounting in application impossible due to incorrect mechanical dimensions.

Dirt, stains, spots (glue, tin, ink, paint), incorrect plating/coating or damaging on car radio boxes or on that part of the loudspeaker which is visible in an open box.

Damaged or wrong parts, or incorrectly mounted parts.

Incorrect or bad connection/joint (soldering, gluing, etc.).

Dirt, stains, spots (glue, tin, ink, paint) or incorrect plating/coating which is not visible in the application.

Auditory inspection

Inoperative or interruptions

Audible low level

Dissonance

Grating or rattling

Rustling

Shrilling

Distortion


	defects	
	major	minor
Incorrect type or not identifiable type.	X	
(Partly) missing, incorrect or unreadable marking.		X
Missing parts.	X	
Missing plating/coating.	X	
Partly missing plating/coating, or corrosion.		X
Missing connection/joint (soldering, gluing, screwing, riveting, pinning, sealing).	X	
Missing or double polarity marking; incorrect polarity indication.	X	
Short-circuit or chance of short-circuit	X	
Tag terminal having poor solderability or plugability	X	
Mounting in application impossible due to incorrect mechanical dimensions.	X	
Dirt, stains, spots (glue, tin, ink, paint), incorrect plating/coating or damaging on car radio boxes or on that part of the loudspeaker which is visible in an open box.	X	X
Damaged or wrong parts, or incorrectly mounted parts.	X	X
Incorrect or bad connection/joint (soldering, gluing, etc.).	X	X
Dirt, stains, spots (glue, tin, ink, paint) or incorrect plating/coating which is not visible in the application.		X
Auditory inspection		
Inoperative or interruptions	X	
Audible low level	X	
Dissonance		
Grating or rattling	X	
Rustling	X	X
Shrilling	X	X
Distortion	X	X

Measurements

(only for loudspeakers in approved hi-fi applications)

	defects	
	major	minor
<i>Resonance frequency</i>		
Deviation more than 30% from nominal value.	X	
Deviation outside tolerance.		X
<i>Voice coil resistance</i>		
Outside twice tolerance.	X	
Outside tolerance.		X
<i>Frequency response curve</i>		
<i>Sensitivity:</i>		
Deviation more than 2 dB from nominal value.	X	
<i>Shape:</i>		
Curve over a bandwidth more than one octave outside tolerance.	X	
Curve over a bandwidth more than 1/3 octave outside tolerance.		X
<i>Distortion</i>		
Outside the requirements according to DIN 45 500.	X	
<i>Incorrect polarity</i>	X	
<i>P.H.C. test</i>		
Damaged parts, loose connection/joint or any other defect mentioned under auditory inspection or measurements (except resonance frequency) appeared at the life test in a period of maximum 100 hours.	X	

TYPE NUMBER SYSTEM

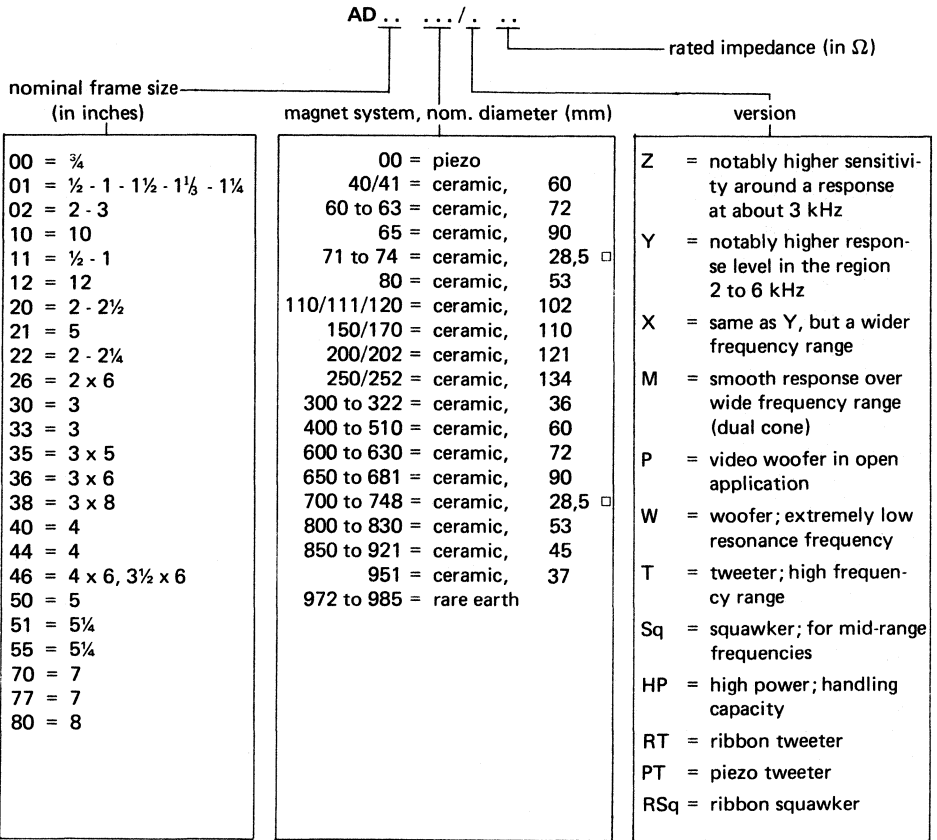

3/4 inch HI-FI DOME TWEETER LOUDSPEAKER

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3 Ω
Rated frequency range	1500 to 15 000 Hz
Resonance frequency	max. 2100 Hz
Power handling capacity, measured with filter 4,7 μ V	10 W
Maximum power on loudspeaker	1 W
Operating power (sound level 90 dB, 1m)	4 W
Sweep voltage (1 to 20 kHz)	2 V
Filter	4,7 μ F
Energy in air gap	17,15 mJ
Flux density	0,8 T
Air-gap height	1,8 mm
Voice coil height	2 mm
Core diameter	18,11 mm
Magnet material	anisotropic cobalt samarium
diameter	17,45 mm
mass	0,005 kg
Mass of loudspeaker	0,035 kg
Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.	

Dimensions in mm

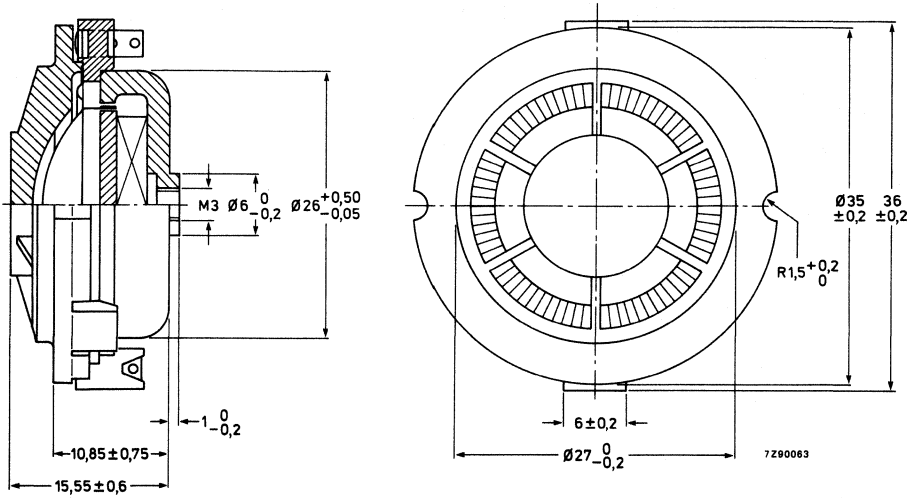


Fig. 1.

AVAILABLE VERSIONS

AD00972/T4 catalogue number 2422 256 35522. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2: 2nd harmonic distortion.

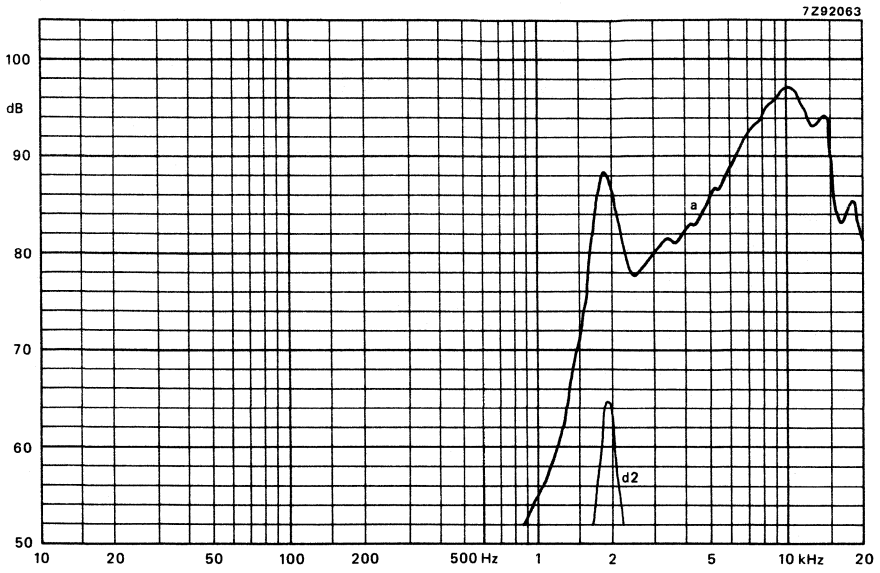


Fig. 2.

2 inch DOME TWEETERS

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7 Ω
Rated frequency range	2 to 20 kHz
Resonance frequency	2000 Hz
Power handling capacity, measured with C = 5 μ F	20 W
Operating power (sound level 90 dB, 1 m)	1,3 W
Sweep voltage (1 to 20 kHz)	t.b.e. V
Filter	none
Energy in air gap	9,5 mJ
Flux density	1,05 T
Air-gap height	1,5 mm
Voice coil height	2 mm
Core diameter	10 mm
Magnet material	ceramic
diameter	ϕ 28,5 mm
mass	18 g
Mass of loudspeaker	65 g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

One tag has a \oplus mark to facilitate phase matching.

AVAILABLE VERSIONS

AD01700/T8 catalogue number 2403 257 32122

AD11700/T8 catalogue number 2403 257 32922

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power.

Dimensions in mm

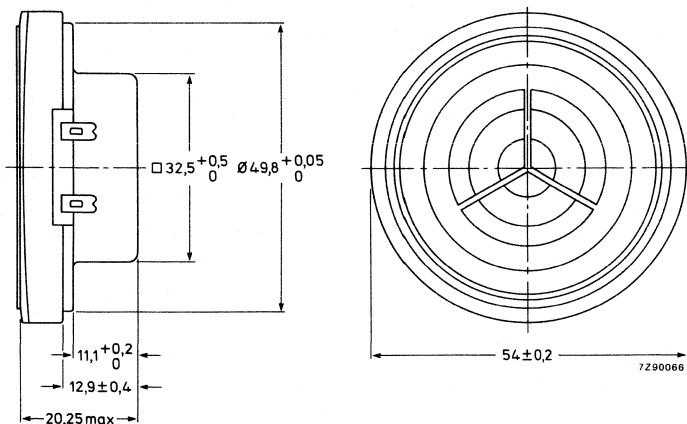


Fig. 1a Round flange type AD01700/T8.

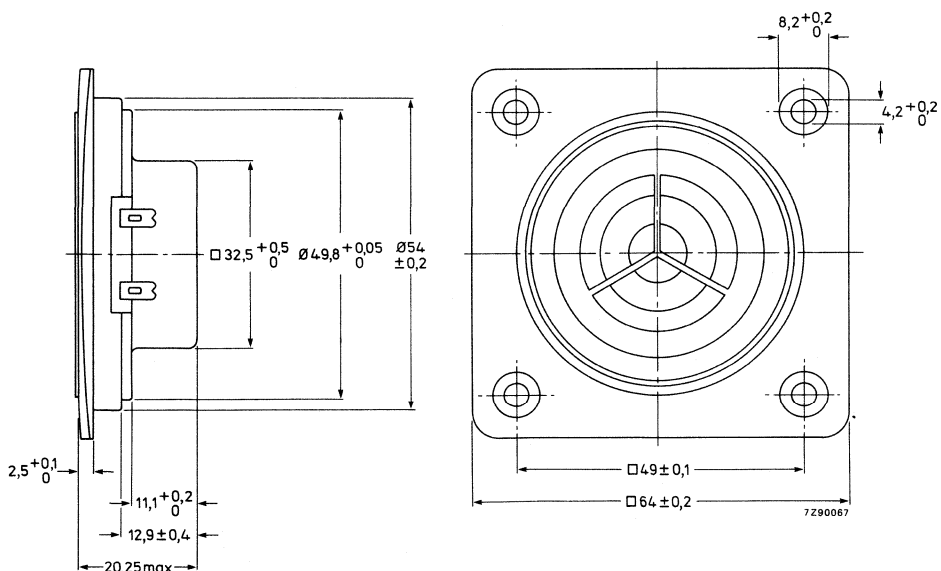


Fig. 1b Square flange type AD11700/T8.

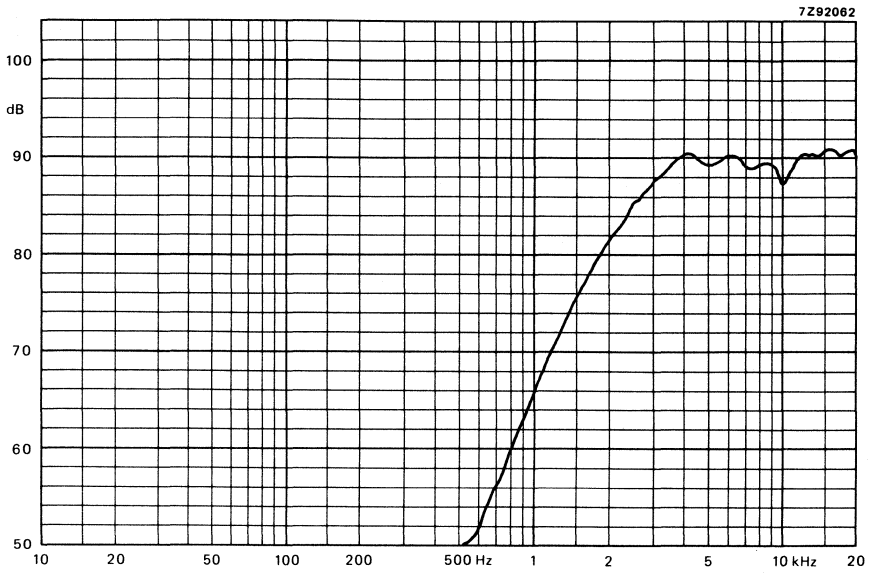


Fig. 2.

DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

AD01750/Y8

1½ inch LOW POWER LOUDSPEAKER

- frame: plastic
- cone: polycarbonate
- surround: polycarbonate
- application: telecommunication
- gaskets: none
- magnetic compensation: none

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7,2 Ω
Rated frequency range	500 to 5000 Hz
Sensitivity	dB
Resonance frequency	430 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	0,3 W
Operating power (sound level 74 dB, 0,5 m)	55 mW
Sweep voltage (400 to 15 000 Hz)	1,1 V
Filter	none
Energy in air gap	5 mJ
Flux density	0,6 T
Air-gap height	2 mm
Air-gap length	mm
Voice coil height	3,6 mm
Rated core diameter	10 mm
Magnet material	ceramic
diameter	26 mm
mass	8 g
Mass of loudspeaker	26 g

Dimensions in mm

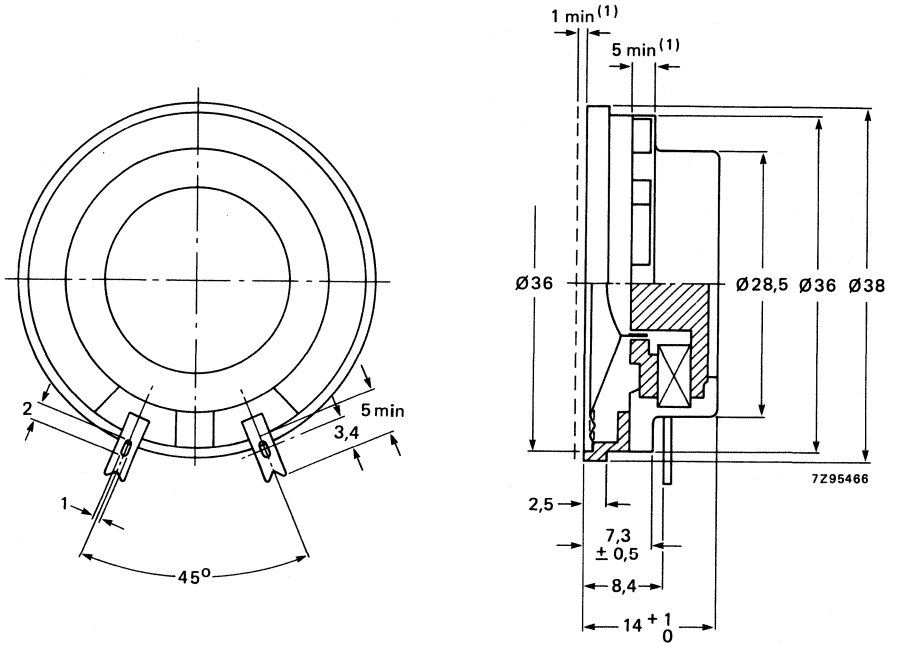


Fig. 1.

(1) Recommended baffle opening (ϕ 35 mm) and mounting clearance (1 mm front and min 5 mm rear) are required for cone movement at the specified power handling capacity. One tag has a \oplus mark to facilitate phase matching.

AVAILABLE VERSION

→ AD01750/Y8 catalogue number 2403 255 00022 } This number is for bulk packed loudspeakers.

FREQUENCY RESPONSE CURVE (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

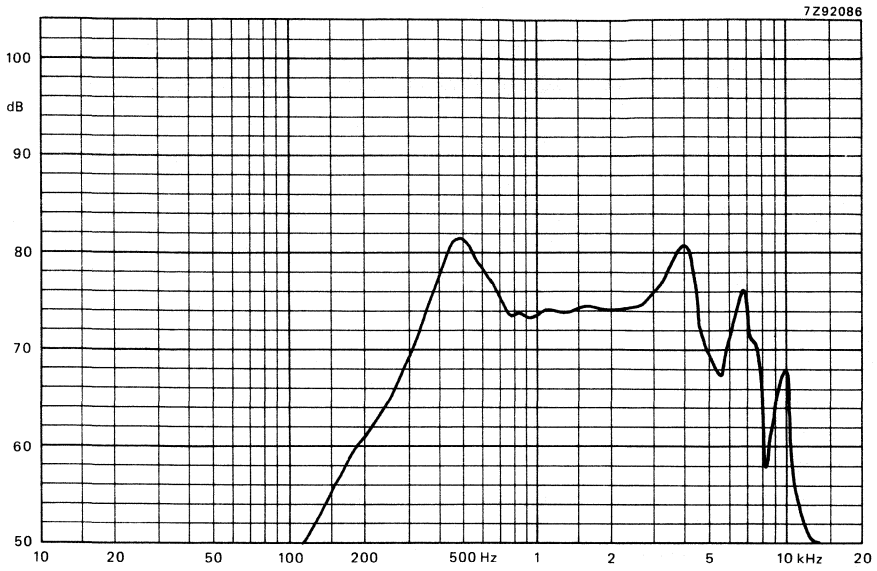


Fig. 2.

1/3 inch LOW POWER LOUDSPEAKER

APPLICATION

Extremely thin loudspeaker for personal agenda intercoms, telephones, and many other professional purposes.

TECHNICAL DATA

	version		
	8	15	25
Rated impedance	8	15	25 Ω
Voice coil resistance	6,9	13,5	20,5 Ω
Rated frequency range	400 to 10 000		Hz
Resonance frequency	600		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	0,3		W
Operating power (sound level 74 dB, 1 m)	55		mW
Sweep voltage (40 to 15 000 Hz)	1,1	1,5	1,9 V
Characteristic sensitivity	53		dB
Energy in air gap	3,4		mJ
Flux density	0,55		T
Air-gap height	0,8		mm
Voice coil height	2,7	2,7	2,9 mm
Core diameter	14,5		mm
Magnet material	rare earth		
mass	1,5		g
Mass of loudspeaker	7		g

Connection is by soldering (max. 350 °C for 3,5 s). The loudspeaker has a plastic frame and a polycarbonate membrane.

Dimensions in mm

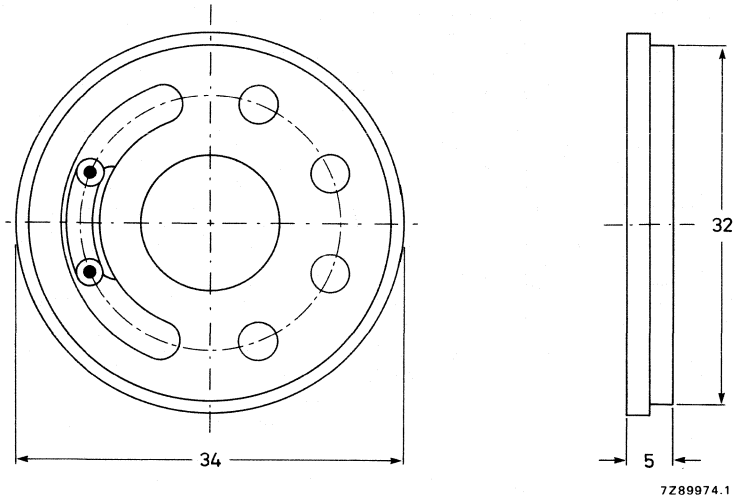


Fig. 1.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: ϕ 29 mm.

AVAILABLE VERSIONS

AD01980/Y8 catalogue number 2403 256 12523

AD01980/Y15 catalogue number 2403 256 12522

AD01980/Y25 catalogue number 2403 256 12521

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Curve of sound pressure, measured in anechoic room at the operating power.

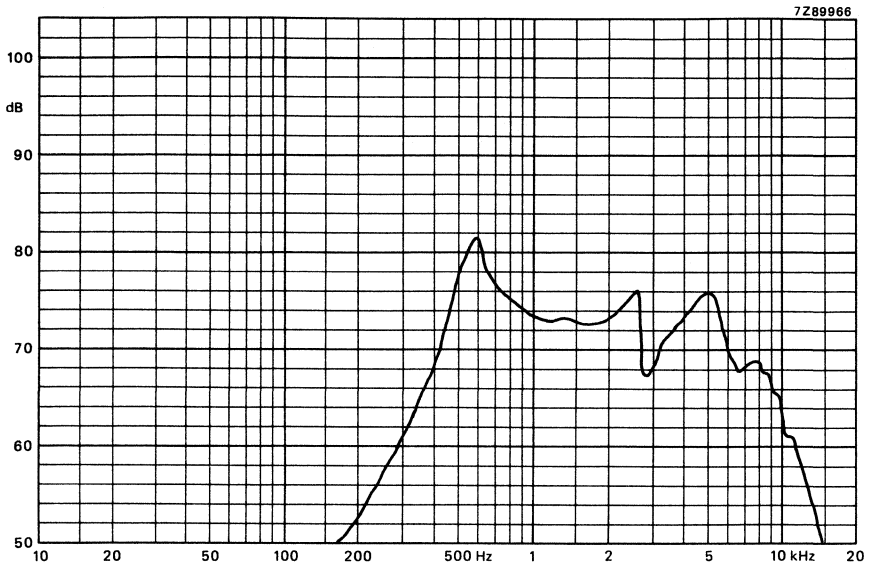


Fig. 2.

1½ inch LOW POWER LOUDSPEAKER

APPLICATION


Extremely thin loudspeaker for personal agenda intercoms, telephones, and many other professional purposes.

TECHNICAL DATA

	version		
	8	15	25
Rated impedance	8	15	25 Ω
Voice coil resistance	6,9	13,5	20,5 Ω
Rated frequency range	400 to 10 000		Hz
Resonance frequency	600		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	0,3		W
Operating power (sound level 74 dB, 1 m)	50		mW
Sweep voltage (40 to 15 000 Hz)	1,1	1,5	1,9 V
Characteristic sensitivity	54		dB
Energy in air gap	3,4		mJ
Flux density	0,55		T
Air-gap height	0,8		mm
Voice coil height	2,7	2,7	2,9 mm
Core diameter	14,5		mm
Magnet material	rare earth		
mass	1,5		g
Mass of loudspeaker	7,5		g

Connection is by soldering (max. 350 °C, for 3,5 s). The loudspeaker has a plastic frame and a polycarbonate membrane.

Dimensions in mm

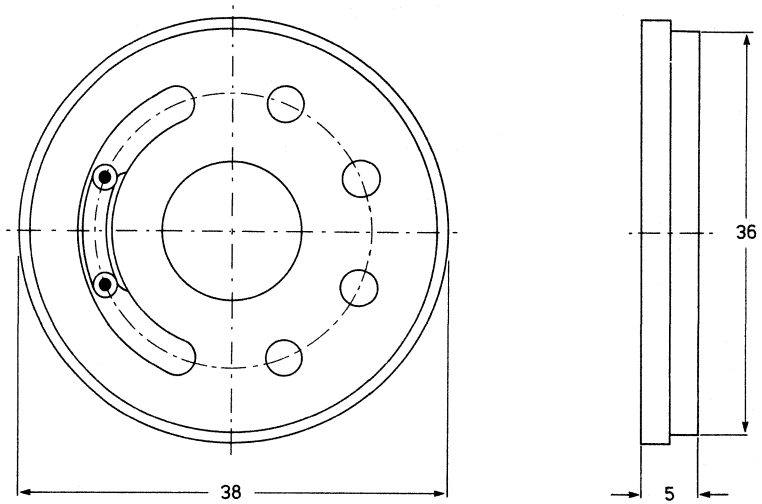

7289975

Fig. 1.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: ϕ 33 mm.

AVAILABLE VERSIONS

- AD01985/Y8 catalogue number 2403 256 12423
 - AD01985/Y15 catalogue number 2403 256 12422
 - AD01985/Y25 catalogue number 2403 256 12421
- } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Curve of sound pressure, measured in anechoic room at the operating power.

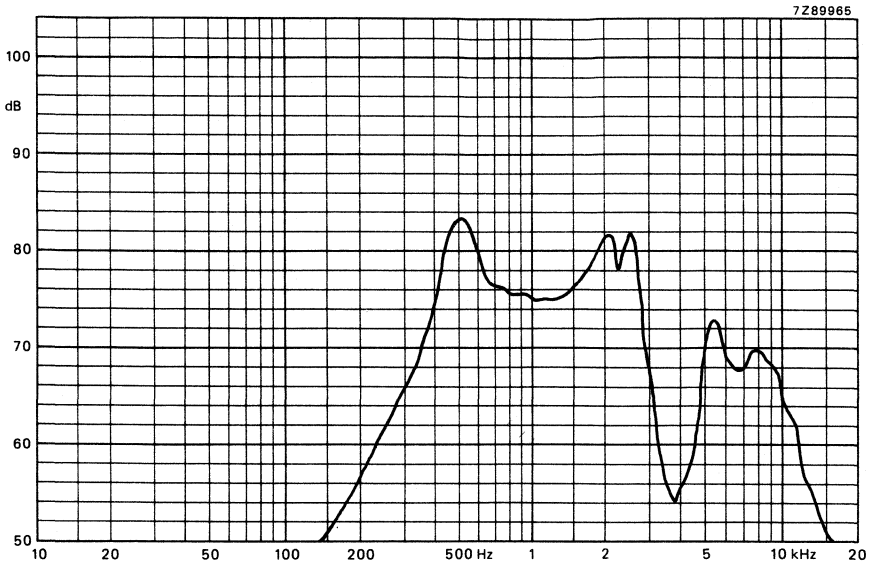


Fig. 2.

2 inch HIGH POWER DOME SQUAWKER LOUDSPEAKER

APPLICATION

For use in hi-fi enclosures. This loudspeaker has a very wide radiating pattern due to its nearly flat conical front.

TECHNICAL DATA

	version	
	Sq4	Sq8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,9 Ω
Resonance frequency	340	360 Hz
Rated frequency range	550 to 5000 Hz	
Power handling capacity, * loudspeaker mounted on IEC baffle, measured with filter		
36 μ F – 1,2 mH	30	W
18 μ F – 2,4 mH		30 W
Maximum power on loudspeaker		60 W
Operating power		4 W
Sweep voltage (100 to 10 000 Hz, filter 36 μ F – 1,2 mH 18 μ F – 2,4 mH)	4	V 5,6 V
Energy in air gap	205	mJ
Flux density	0,9	T
Air-gap height	3	mm
Voice coil height	3,3	mm
Core diameter	50	mm
Magnet material	ceramic	
diameter	102	mm
mass	0,35	kg
Mass of loudspeaker	1	kg

The loudspeaker has a textile dome and an acoustically sealed pot. No isolation is required. Connection to the squawker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

AVAILABLE VERSIONS

AD02110/Sq4, catalogue number 2422 257 32221 | these numbers apply to bulk packed loudspeakers,
AD02110/Sq8, catalogue number 2422 257 32222 | minimum packing quantity 8 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room, loudspeaker mounted on IEC baffle at operating power. Above 500 Hz the sound pressure may not deviate more than ± 1 dB.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

* Measuring according to DIN 45573 par. 3.2.

Dimensions in mm

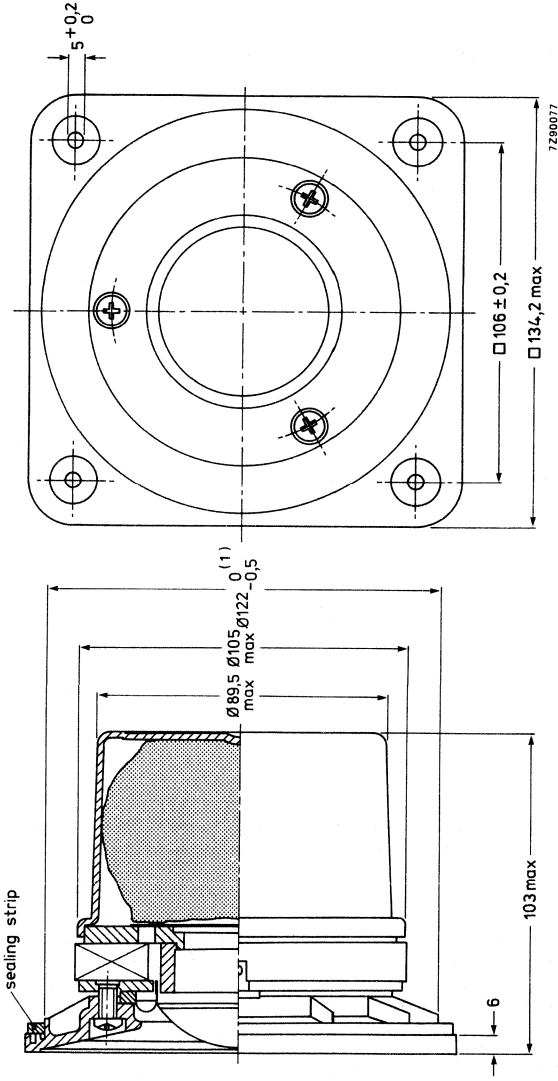


Fig. 1.

(1) Baffle hole diameter 122 mm.
One tag is indicated by a red mark for in-phase connection.

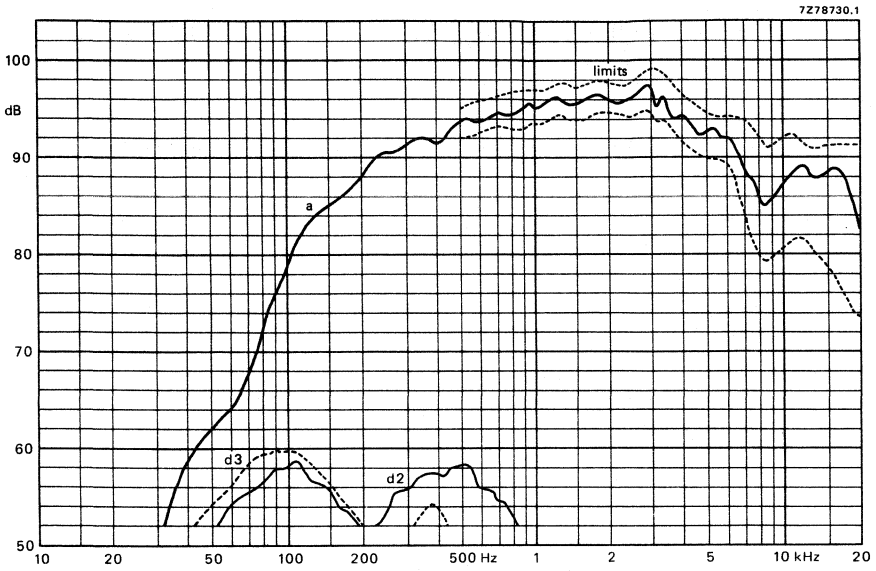


Fig. 2.

2 inch HIGH POWER DOME SQUAWKER LOUDSPEAKER

APPLICATION

For use in hi-fi enclosures. This loudspeaker has a very wide radiating pattern due to its nearly flat conical front.

TECHNICAL DATA

	version	
	Sq4	Sq8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,9 Ω
Resonance frequency	340	360 Hz
Rated frequency range	550 to 5000 Hz	
Power handling capacity, * loudspeaker mounted on IEC baffle measured with filter		
36 μ F – 1,2 mH	30	W
18 μ F – 2,4 mH		30 W
Maximum power on loudspeaker	60	W
Operating power	2,5	W
Sweep voltage (100 to 10 000 Hz, filter 36 μ F – 1,2 mH 18 μ F – 2,4 mH)	3,1	V
		4,4 V
Energy in air gap	288	mJ
Flux density	1,1	T
Air-gap height	3	mm
Voice coil height	3,3	mm
Core diameter	50	mm
Magnet material	ceramic	
diameter	110	mm
mass	0,65	kg
Mass of loudspeaker	1,5	kg

The loudspeaker has a textile dome and an acoustically sealed pot. No isolation is required. Connection to the squawker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

AVAILABLE VERSIONS

AD02150/Sq4, catalogue number 2422 257 32321 } these numbers apply to bulk packed loudspeakers,
AD02150/Sq8, catalogue number 2422 257 32322 } minimum packing quantity 8 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room, loudspeaker mounted on IEC baffle at operating power. Above 500 Hz the sound pressure may not deviate more than ± 1 dB.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

* Measured according to DIN 45573 par. 3.2.

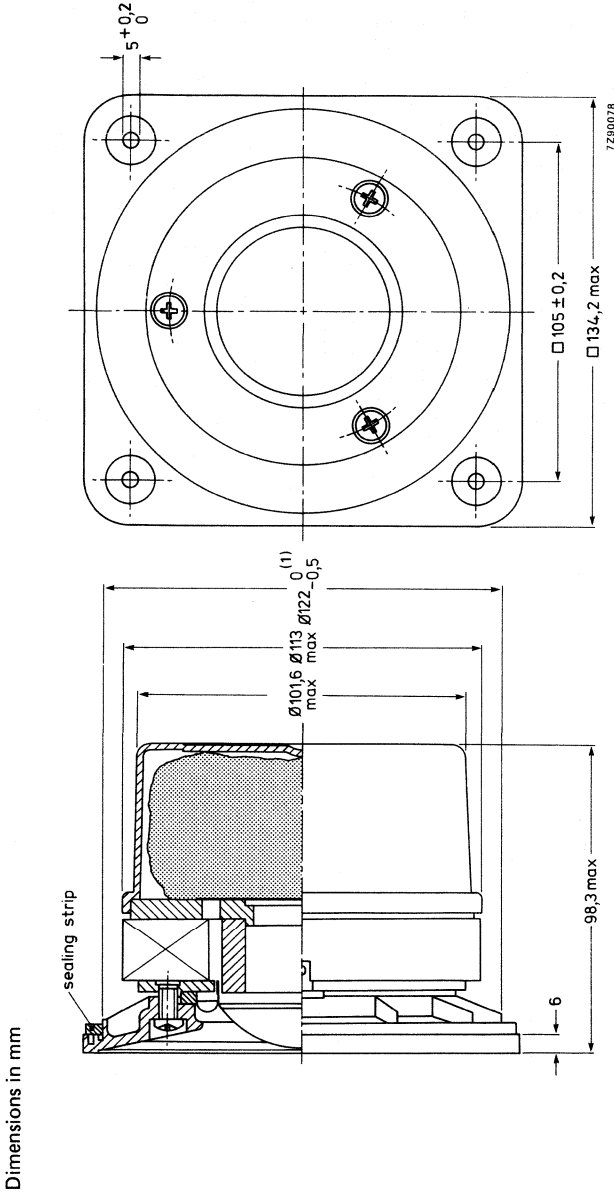


Fig. 1.

(1) Baffle hole diameter 122 mm.
One tag is indicated by a red mark for in-phase connection.

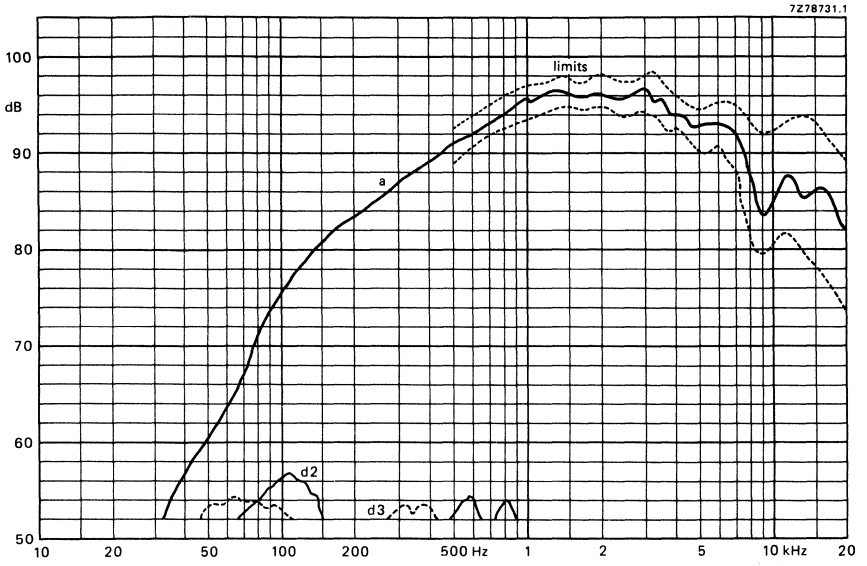


Fig. 2.

3 inch HIGH POWER FLAT MEMBRANE SQUAWKER LOUDSPEAKER

APPLICATION

For use in hi-fi enclosures. This loudspeaker has a very wide radiating pattern due to its flat front.

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,9 Ω
Resonance frequency	640 Hz
Rated frequency range	750 to 5000 Hz
Power handling capacity,* loudspeaker mounted on IEC baffle, measured with filter 18 μ F – 2,4 mH	25 W
Maximum power on loudspeaker	50 W
Operating power	3 W
Sweep voltage (100 to 10 000 Hz, filter 18 μ F – 2,4 mH)	4,9 V
Energy in air gap	288 mJ
Flux density	1,1 T
Air-gap height	3 mm
Voice coil height	3,3 mm
Core diameter	50 mm
Magnet material	ceramic
diameter	110 mm
mass	0,65 kg
Mass of loudspeaker	1,5 kg

The loudspeaker has a flat membrane and an accoustically sealed pot. No isolation is required. Connection to the squawker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

AVAILABLE VERSIONS

AD02170/Sq catalogue number 2404 257 32422; this number applies to bulk packed loudspeakers, minimum packing quantity 8 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room, loudspeaker mounted on IEC baffle at operating power. Above 500 Hz the sound pressure may not deviate more than ± 1 dB.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

* Measured according to DIN 45573 par. 3.2.

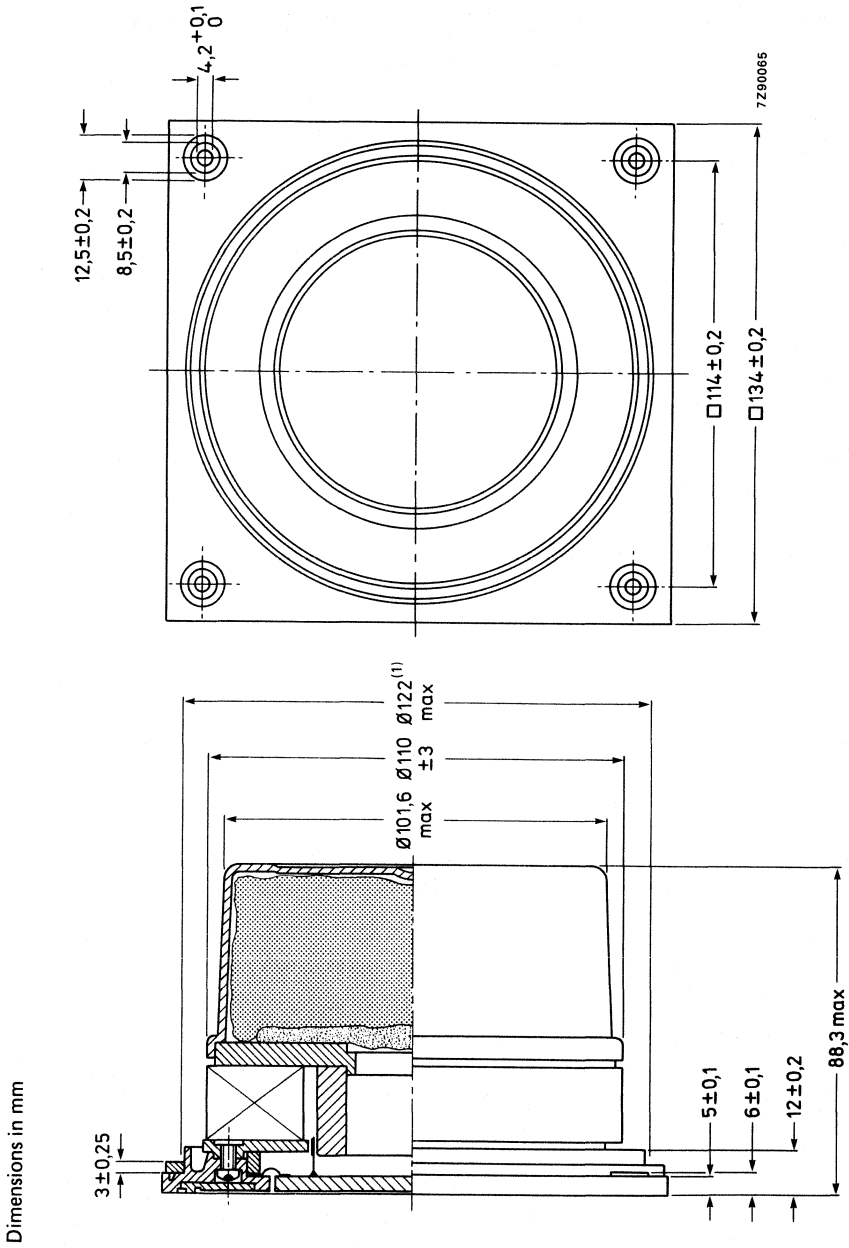


Fig. 1.

(1) Baffle hole diameter 122 mm.
One tag is indicated by a red mark for in-phase connection.

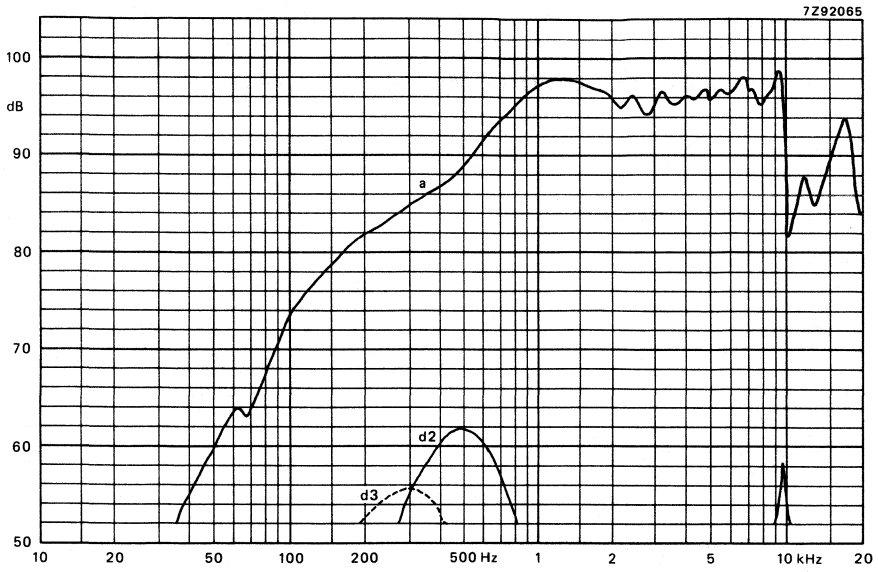


Fig. 2.

2½ inch LOW POWER LOUDSPEAKER

APPLICATION

For portable receivers and intercoms.

TECHNICAL DATA

	version					
	Z4	Z8	Z15	Z25	Z50	Z150
Rated impedance	4	8	15	25	50	150 Ω
Voice coil resistance	3,5	7,1	13,7	22,8	37	127 Ω
Rated frequency range	180 to 4000					Hz
Resonance frequency	360					Hz
Power handling capacity, loudspeaker unmounted, measured without filter	1					W
Operating power (sound level 90 dB, 0,5 m)	0,55					W
Sweep voltage (frequency range: 240 to 15000 Hz)	1	1,4	1,9	2,5	5	8,7 V
Energy in air gap	12,7					mJ
Flux density	0,74					T
Air-gap height	2,5					mm
Voice coil height	2,7	2,2	3,0	3,6	3,9	3,5 mm
Core diameter	10					
Magnet material	ceramic					
square	28,5					mm
mass	0,018					kg
Mass of loudspeaker	0,05					kg

The loudspeaker has a plastic frame, and a paper cone and surround. Connection to the loudspeaker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions (mm)

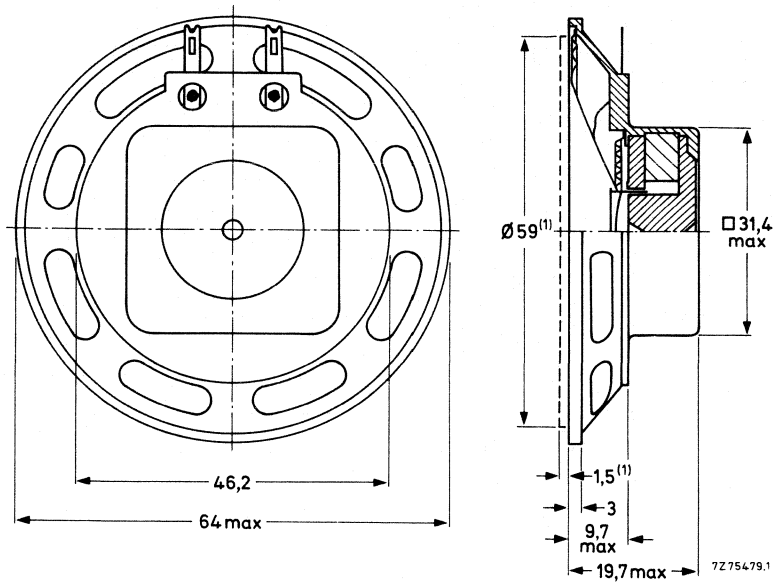


Fig.1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by + sign for in-phase connection.

AVAILABLE VERSIONS

- AD2071/Z4, catalogue number 2403 257 23821
- AD2071/Z8, catalogue number 2403 257 23822
- AD2071/Z15, catalogue number 2403 257 23823
- AD2071/Z25, catalogue number 2403 257 23824
- AD2071/Z50, catalogue number 2403 257 23826
- AD2071/Z150, catalogue number 2403 257 23825

these numbers apply to bulk packed loudspeakers, minimum packing quantity 125 per unit.

FREQUENCY RESPONSE CURVE (see Fig. 2)

Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

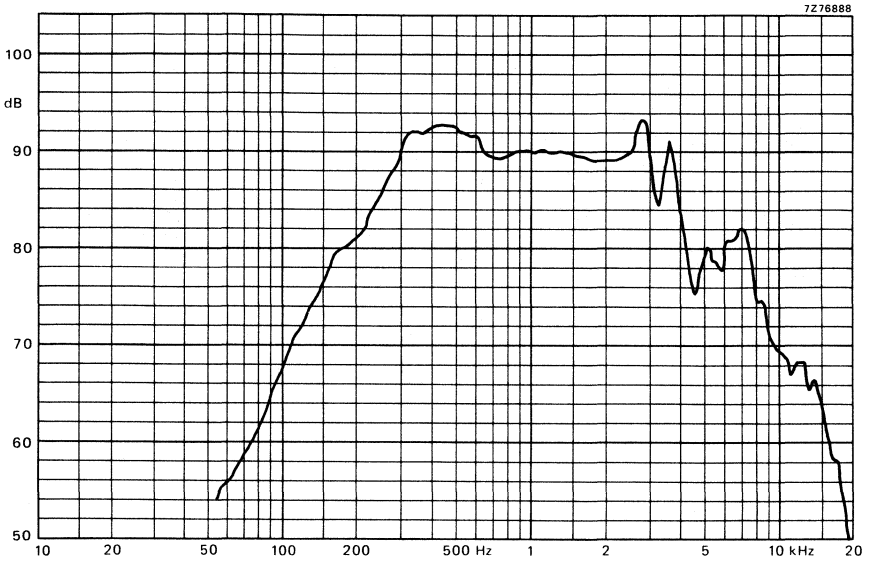


Fig.2.

3 inch LOW POWER LOUDSPEAKERS

APPLICATION

For portable receivers and intercoms.

TECHNICAL DATA

	version						
	Y4	Y8	Y15	Y25	Y50	Y150	
Rated impedance	4	8	15	25	50	150	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	45	127	Ω
Rated frequency range	100 to 6000						Hz
Resonance frequency	250						Hz
Power handling capacity, loudspeaker unmounted, measured without filter	2						W
Operating power (sound level 90 dB, 0,5 m)	0,6						W
Sweep voltage (frequency range 170 to 15 000 Hz)	2	2,8	3,9	5	7,1	12,2	V
Energy in air gap	12,7						mJ
Flux density	0,74						T
Air-gap height	2,5						mm
Voice coil height	2,7	2,2	3,0	3,6	4,7	3,5	mm
Core diameter	10						mm
Magnet material	ceramic						
square	28,5						mm
mass	0,018						kg
Mass of loudspeaker	0,059						kg

The loudspeakers have a plastic frame, and a paper cone and surround. Type AD3371/Y. is provided with 4 mounting ears (dotted in Fig. 1). Connection to the loudspeakers by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

AD3071/Y.
AD3371/Y.

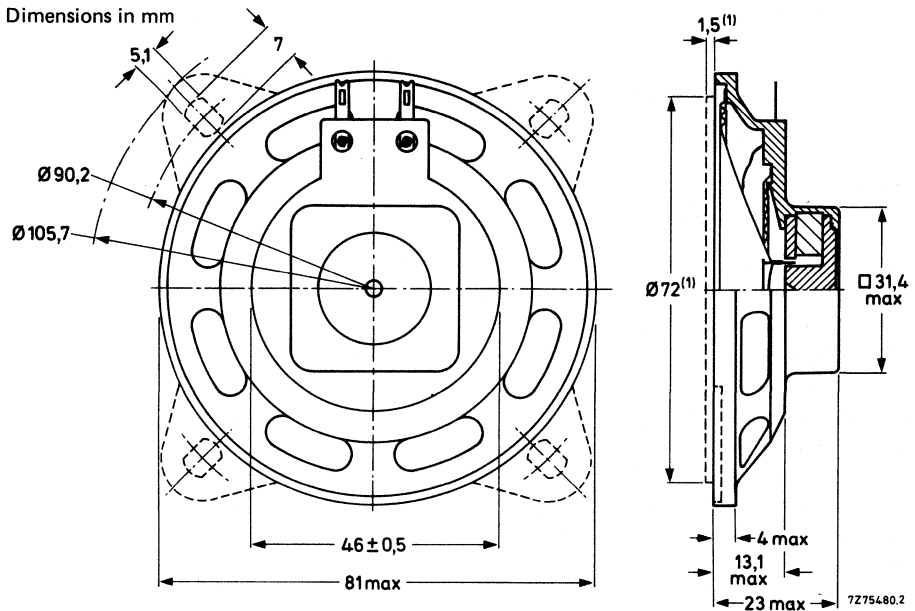


Fig. 1 Dotted mounting ears for type AD3371/Y.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD3071/Y4,	catalogue number 2403 257 23621
AD3071/Y8,	catalogue number 2403 257 23622
AD3071/Y15,	catalogue number 2403 257 23623
AD3071/Y25,	catalogue number 2403 257 23624
AD3071/Y50,	catalogue number 2403 257 23625
AD3071/Y150,	catalogue number 2403 257 23626
AD3371/Y4,	catalogue number 2403 257 23521
AD3371/Y8,	catalogue number 2403 257 23522
AD3371/Y15,	catalogue number 2403 257 23523
AD3371/Y25,	catalogue number 2403 257 23524
AD3371/Y50,	catalogue number 2403 257 23525
AD3371/Y150,	catalogue number 2403 257 23526

these numbers apply to bulk packed loudspeakers, minimum packing quantity 50 per unit.

FREQUENCY RESPONSE CURVE (see Fig. 2)

Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

7278889

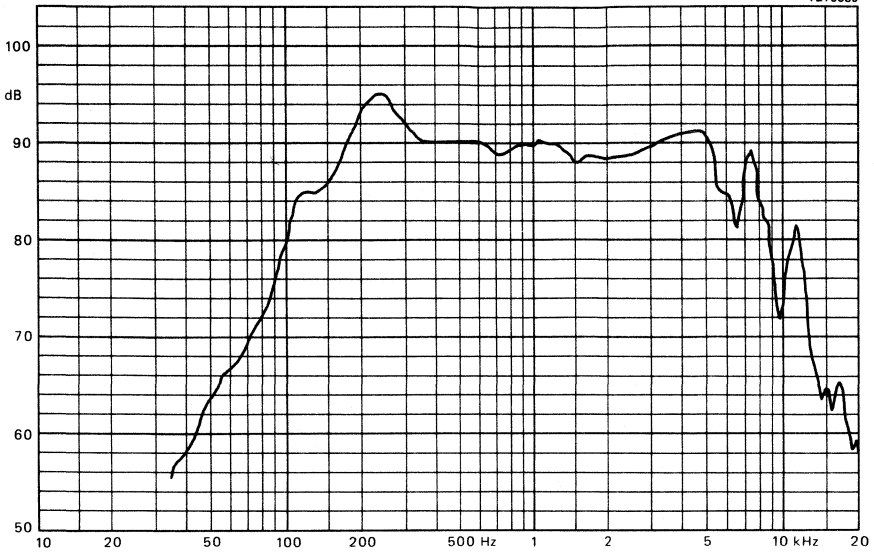


Fig. 2.

4inch LOW POWER LOUDSPEAKERS

APPLICATION

For portable receivers and intercoms.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	80 to 15 000				Hz
Resonance frequency	170				Hz
Power handling capacity, loudspeaker unmounted, measured without filter	3				W
Operating power (sound level 90 dB, 0,5 m)	0,45				W
Sweep voltage (frequency range 100 to 20 000 Hz)	2,4	3,5	4,7	6,1	V
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm ←
mass	0,018				kg
Mass of loudspeaker, round flange version	0,067				kg
square flange version	0,069				kg

The loudspeakers have a plastic frame, and a paper cone and surround. Connection to the loudspeakers is by means of 2,8 mm (0,11 inch) tag connectors or soldering.

AD4072/X.
AD4472/X.

Dimensions in mm

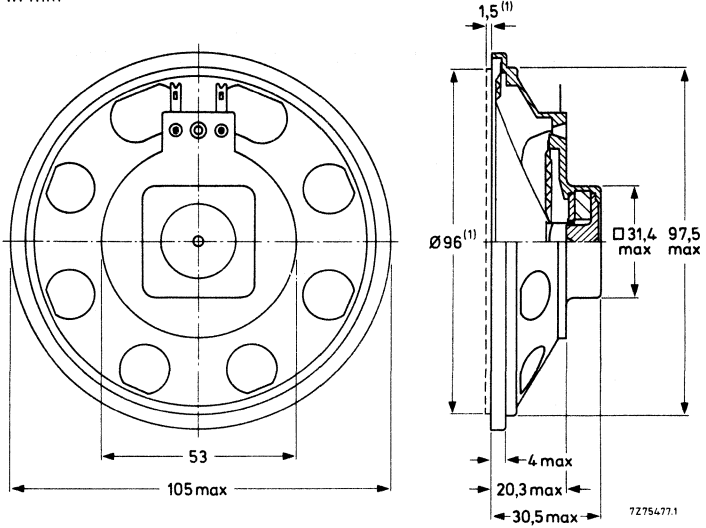


Fig. 1a.

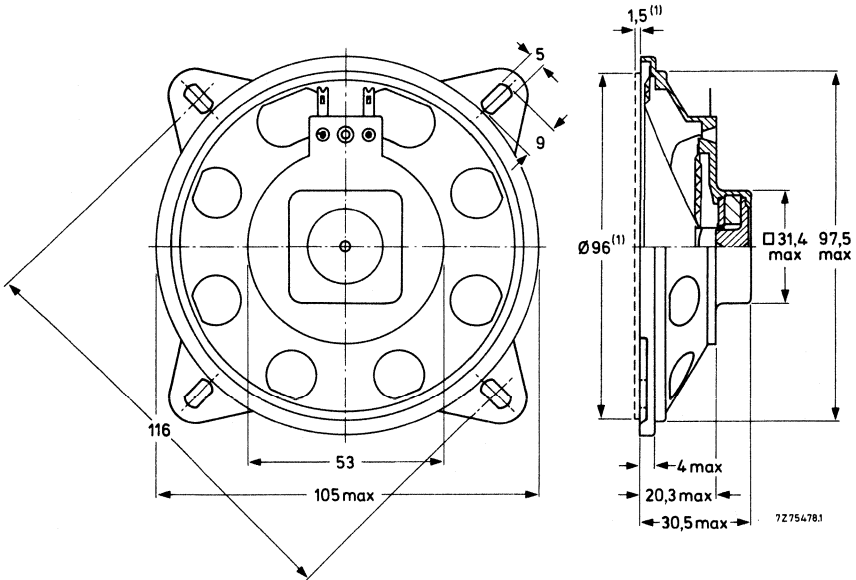


Fig. 1b.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

type according to Fig. 1a.

- AD4072/X4, catalogue number 2403 257 24225
- AD4072/X8, catalogue number 2403 257 24226
- AD4072/X15, catalogue number 2403 257 24227
- AD4072/X25, catalogue number 2403 257 24228

type according to Fig. 1b.

- AD4472/X4, catalogue number 2403 257 24825
- AD4472/X8, catalogue number 2403 257 24826
- AD4472/X15, catalogue number 2403 257 24827
- AD4472/X25, catalogue number 2403 257 24828

these numbers apply to bulk
packed loudspeakers, minimum
packing quantity 50 per unit.

FREQUENCY RESPONSE CURVE (see Fig.2)

Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

AD4072/X.
AD4472/X.

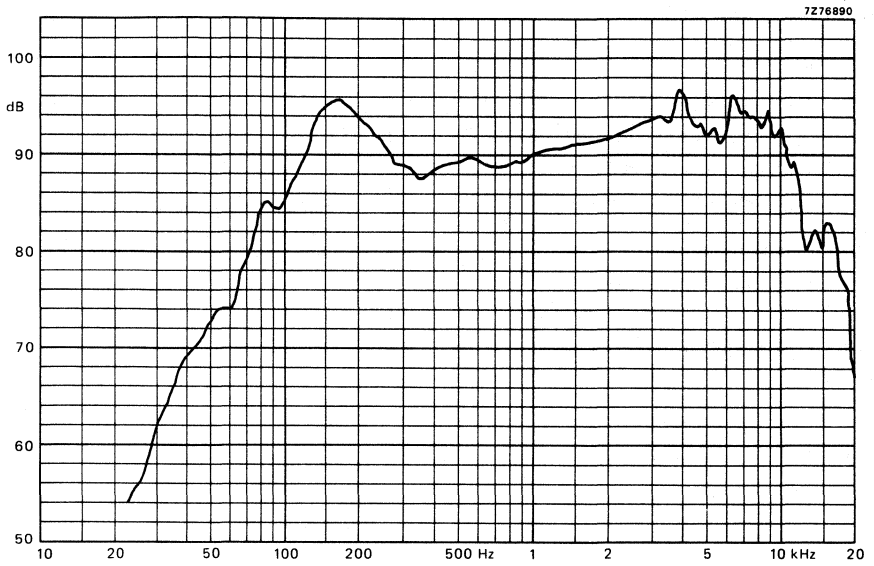


Fig. 2.

4inch LOW POWER LOUDSPEAKERS

APPLICATION

Very suitable for portable black and white, and colour television sets, because these loudspeakers are provided with a magnetic shield.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	80 to 15 000			Hz
Resonance frequency	170			Hz
Power handling capacity, loudspeaker unmounted, measured without filter	2,5			W
Operating power (sound level 90 dB, 0,5 m)	0,45			W
Sweep voltage (frequency range 100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	0,02			kg
Mass of loudspeaker,				
round flange version	0,067			kg
square flange version	0,069			kg

The loudspeakers have a plastic frame, and a paper cone and surround. Connection to the loudspeakers is by means of 2,8 mm (0,11 inch) tag connectors or soldering.

AD4074/X.
AD4474/X.

Dimensions in mm

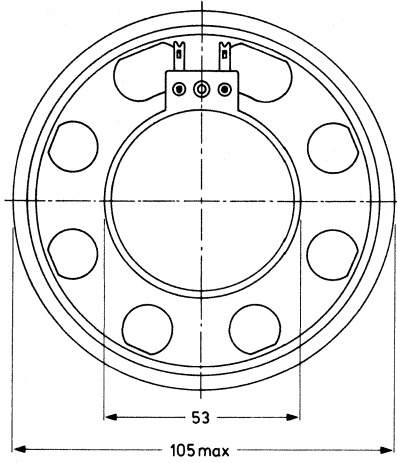


Fig. 1a.



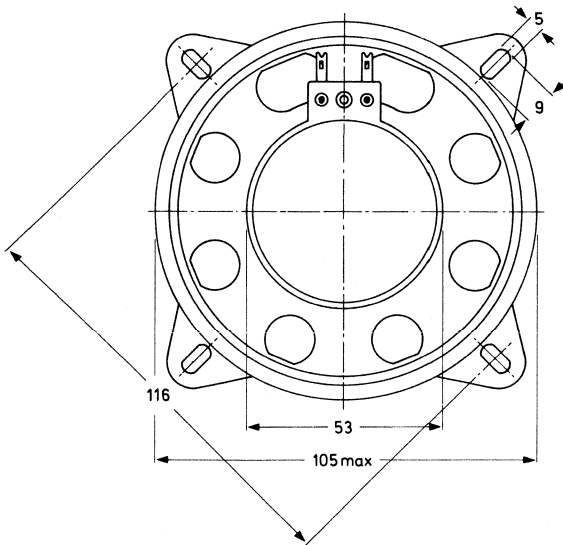


Fig. 1b.

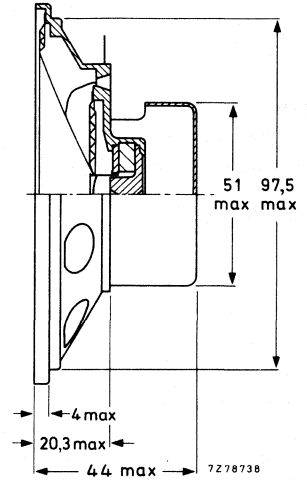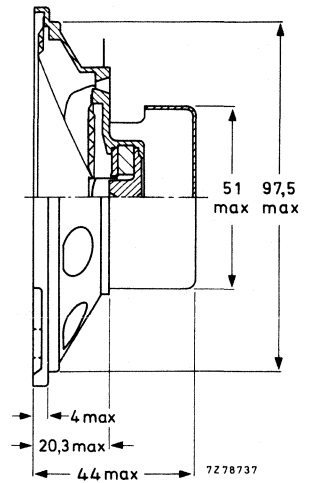

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

type according to Fig. 1a.

AD4074/X4, catalogue number 2403 257 24325

AD4074/X8, catalogue number 2403 257 24326

AD4074/X15, catalogue number 2403 257 24327

AD4074/X25, catalogue number 2403 257 24328

type according to Fig. 1b.

AD4474/X4, catalogue number 2403 257 24725

AD4474/X8, catalogue number 2403 257 24726

AD4474/X15, catalogue number 2403 257 24727

AD4474/X25, catalogue number 2403 257 24728

these numbers apply to bulk
packed loudspeakers, minimum
packing quantity 40 per unit.

FREQUENCY RESPONSE CURVE (see Fig. 2)

Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

AD4074/X.
AD4474/X.

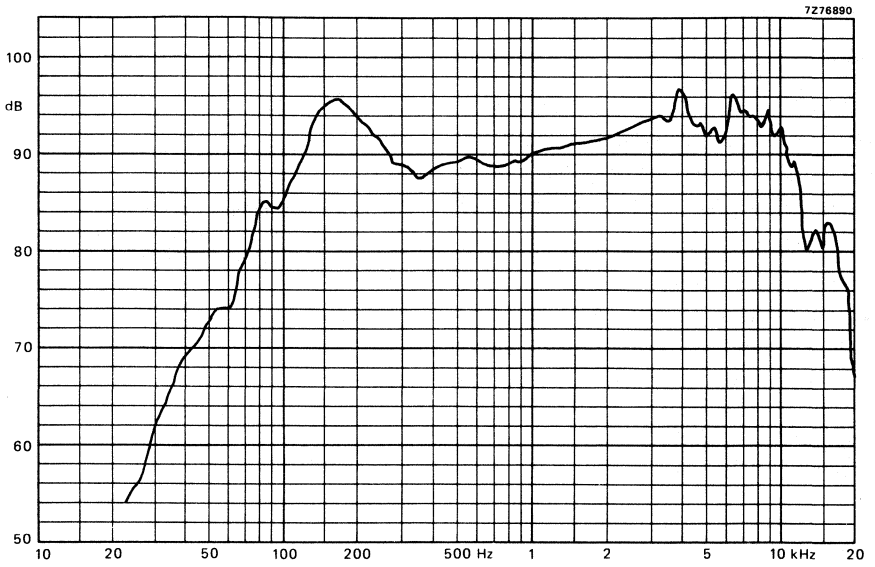


Fig. 2.

10 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,7 Ω
Rated frequency range	up to 1000 Hz
Resonance frequency	26 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	80 W
Max. power on loudspeaker	150 W
Operating power (sound level 96 dB, 1 m)	7 W
Sweep voltage (20 to 2000 Hz)	10 V
Filter	none
Characteristic sensitivity	88 \pm 2 dB
Energy in air gap	508 mJ
Flux density	0,72 T
Force factor (Bxl) at 1A	13 Wb/m
Piston area	314 cm ²
Total moving mass	0,049 kg
Compliance, loudspeaker unmounted	0,8 x 10 ⁻³ m/N
Equivalent box volume	95 l
Quality factor, loudspeaker unmounted	
mechanical	3,8
electrical	0,3
total	0,28
Air-gap height	7 mm
Air-gap length	2,15 mm
Voice coil height	17 mm
Rated coil diameter	50 mm
Magnet material	ceramic
diameter	121 mm
mass	0,88 kg
Mass of loudspeaker	2,7 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

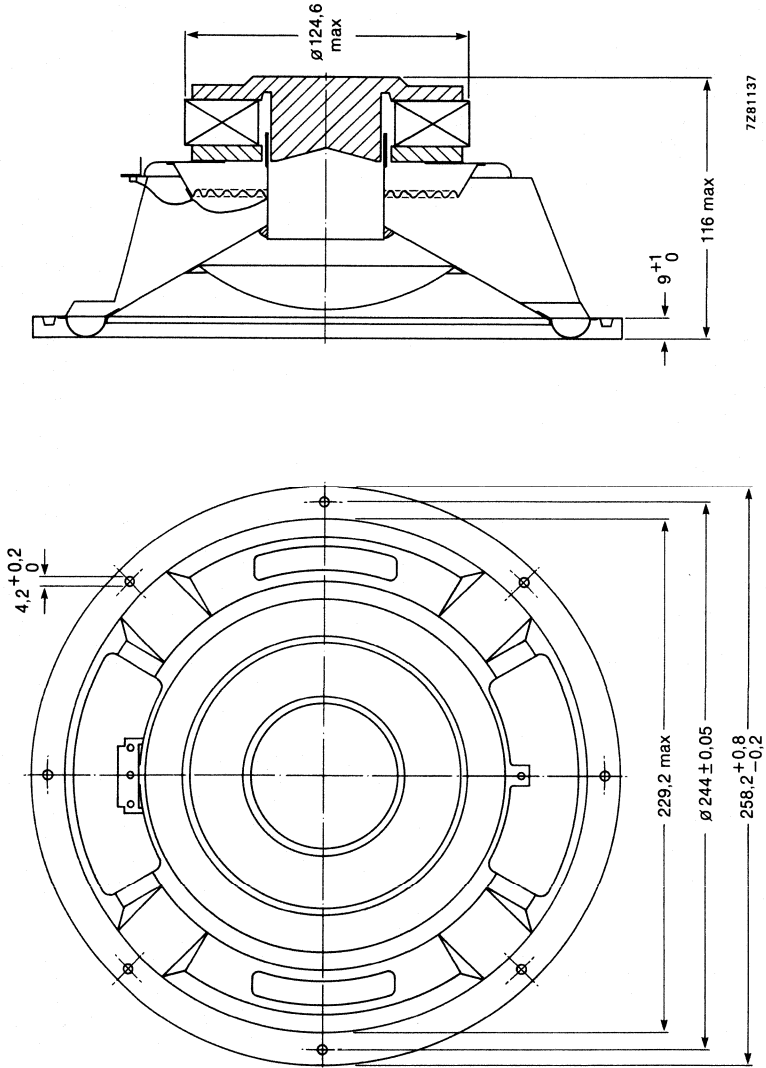


Fig. 1. Recommended baffle opening ($\varnothing 226,5$ mm) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

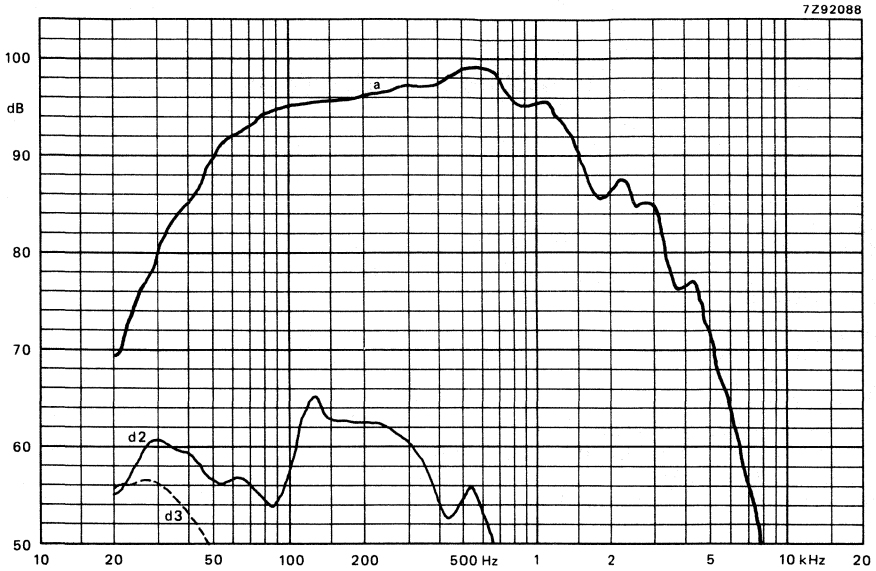


Fig. 2.

AVAILABLE VERSIONS

AD10202/W8. catalogue number 2422 257 31827 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

10 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	6 Ω
Voice coil resistance	4,5 Ω
Rated frequency range	up to 1000 Hz
Resonance frequency	27 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	100 W
Max. power on loudspeaker	150 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (20 to 2000 Hz)	8,5 V
Filter	none
Characteristic sensitivity	90 \pm 2 dB
Energy in air gap	803 mJ
Flux density	1,02 T
Force factor (Bxl) at 1A	11,5 Wb/m
Piston area	314 cm ²
Total moving mass	0,0385 kg
Compliance, loudspeaker unmounted	0,97 x 10 ⁻³ m/N
Equivalent box volume	115 l
Quality factor, loudspeaker unmounted	
mechanical	2,61
electrical	0,23
total	0,21
Air-gap height	7 mm
Air-gap length	1,5 mm
Voice coil height	17 mm
Rated coil diameter	50 mm
Magnet material	ceramic
diameter	134 mm
mass	1,15 kg
Mass of loudspeaker	3,45 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

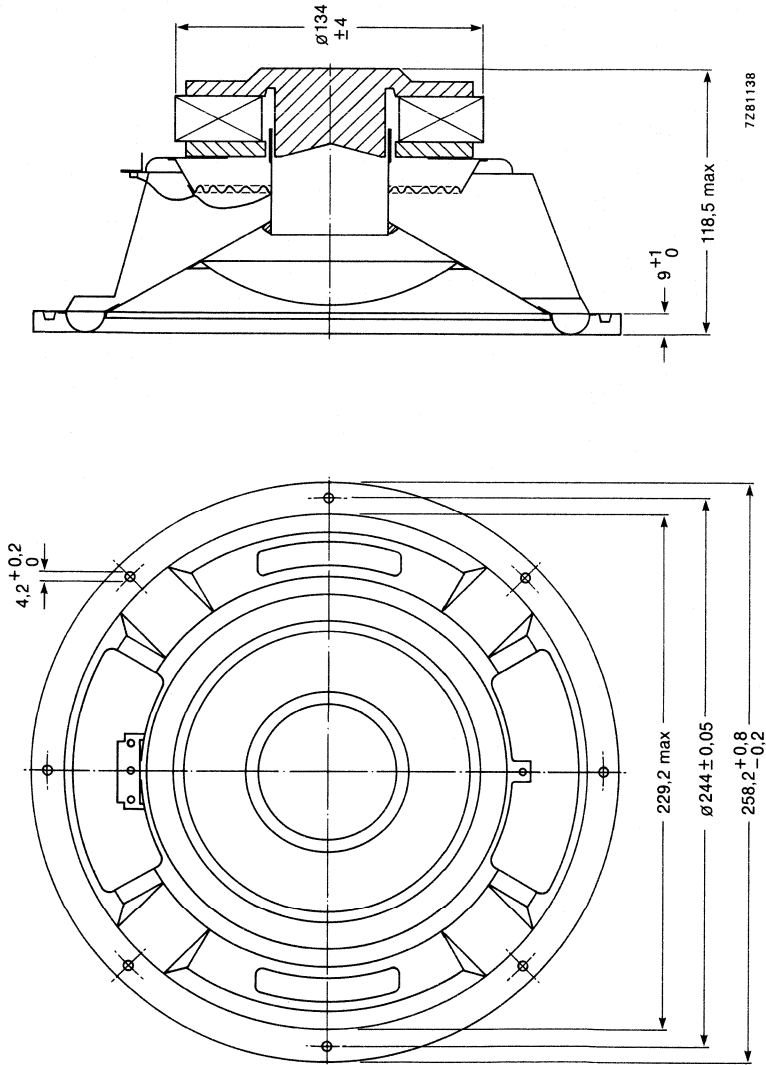


Fig. 1.

Recommended baffle opening ($\varnothing 226.5$ mm) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

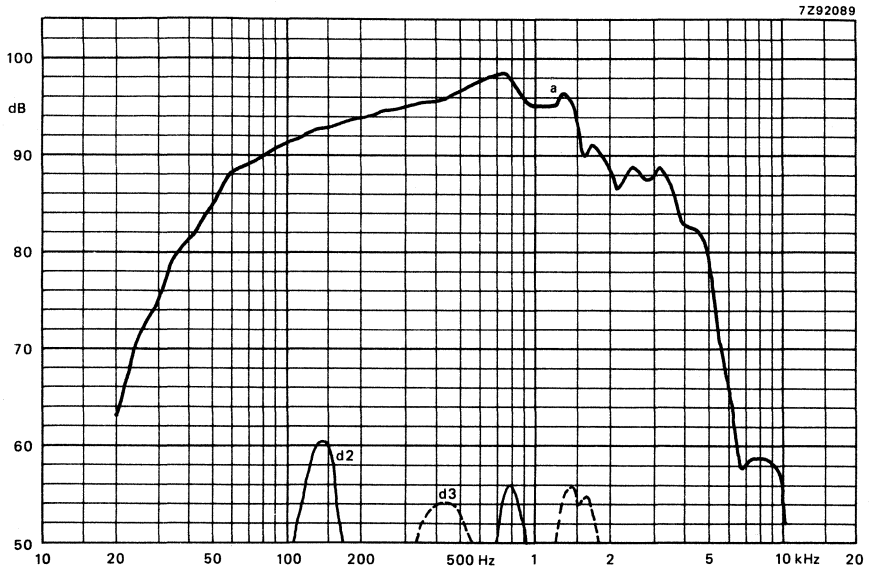


Fig. 2.

AVAILABLE VERSION

AD10252/W6. catalogue number 2422 257 31926 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

10 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,3 Ω
Rated frequency range	up to 2500 Hz
Resonance frequency	31 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	40 W
Max. power on loudspeaker	60 W
Operating power (sound level 96 dB, 1 m)	5 W
Sweep voltage (20 to 2500 Hz)	7 V
Filter	none
Characteristic sensitivity	89 \pm 2 dB
Energy in air gap	123 mJ
Flux density	0,62 T
Force factor (Bxl) at 1 A	5,9 Wb/m
Piston area	314 cm ²
Total moving mass	0,0285 kg
Compliance, loudspeaker unmounted	1,1 \times 10 ⁻³ m/N
Equivalent box volume	118 l
Quality factor, loudspeaker unmounted	
mechanical	4,76
electrical	1
total	0,83
Air-gap height	5 mm
Air-gap length	1,9 mm
Voice coil height	12 mm
Rated coil diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,285 kg
Mass of loudspeaker	1,1 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

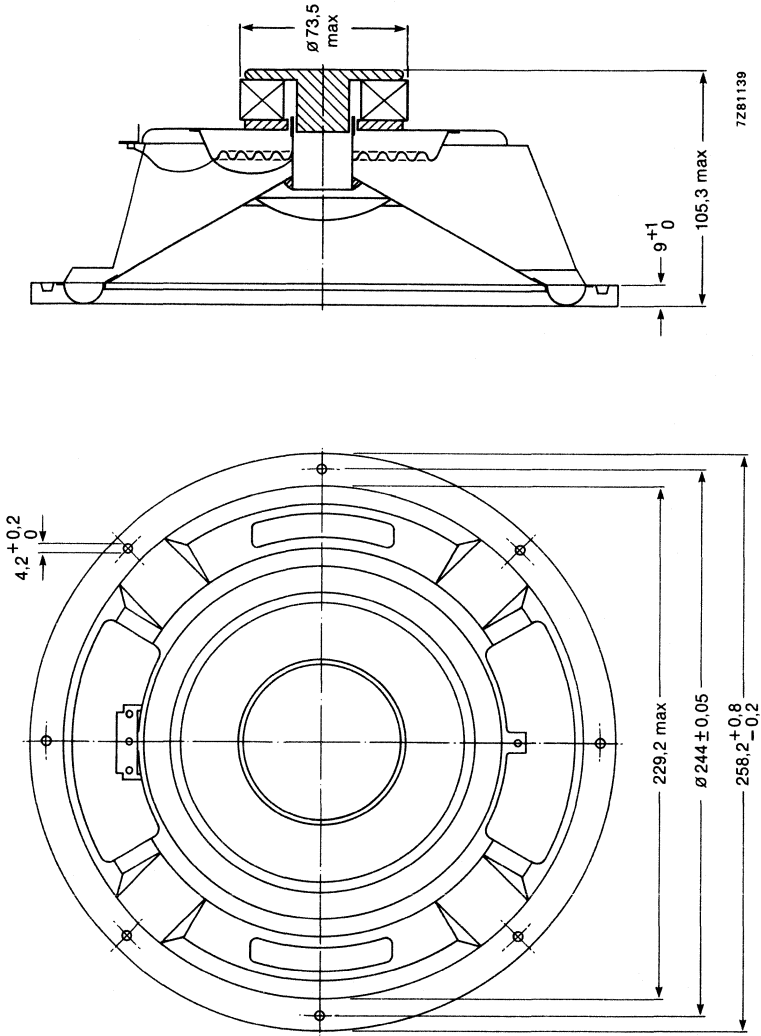


Fig. 1.

Recommended baffle opening ($\phi 226,5$ mm) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

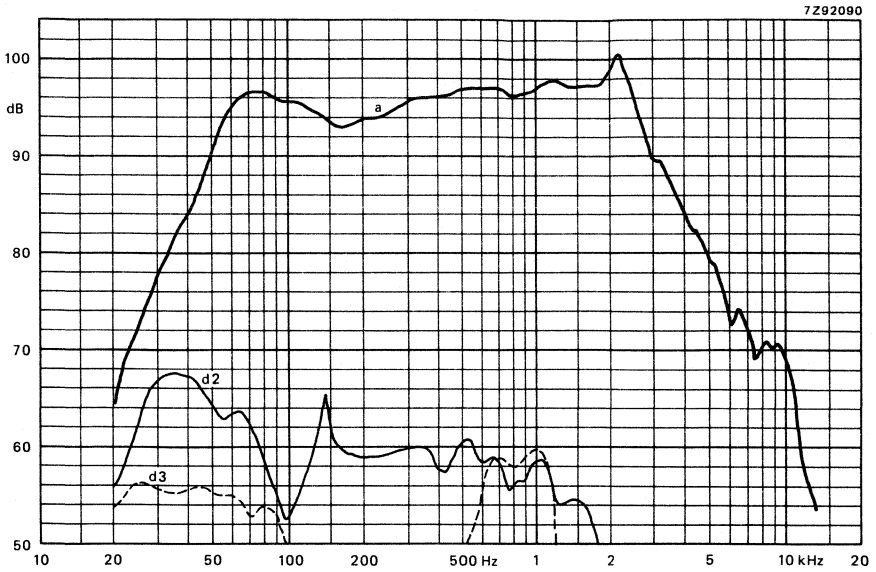


Fig. 2.

AVAILABLE VERSIONS

AD10602/W8. catalogue number 2422 257 31626 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

10 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,4 Ω
Rated frequency range	up to 1500 Hz
Resonance frequency	27 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	60 W
Max. power on loudspeaker	100 W
Operating power (sound level 96 dB, 1 m)	5 W
Sweep voltage (20 to 2000 Hz)	8 V
Filter	none
Characteristic sensitivity	89 \pm 2 dB
Energy in air gap	233 mJ
Flux density	0,96 T
Force factor (Bxl) at 1 A	6,2 Wb/m
Piston area	314 cm ²
Total moving mass	0,0315 kg
Compliance, loudspeaker unmounted	1,2 x 10 ⁻³ m/N
Equivalent box volume	142 l
Quality factor, loudspeaker unmounted	
mechanical	2,8
electrical	0,8
total	0,62
Air-gap height	5 mm
Air-gap length	1,15 mm
Voice coil height	18 mm
Rated coil diameter	35 mm
Magnet material	ceramic
diameter	90 mm
mass	0,445 kg
Mass of loudspeaker	1,6 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

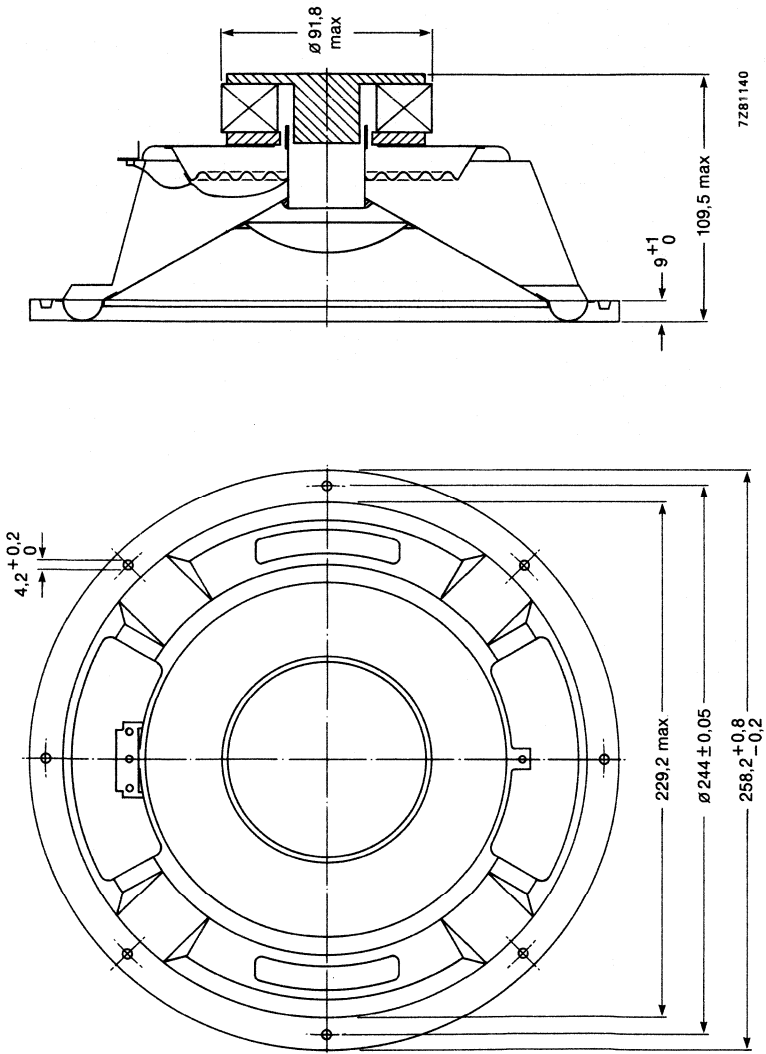


Fig. 1.

Recommended baffle opening ($\varnothing 226,5 \text{ mm}$) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

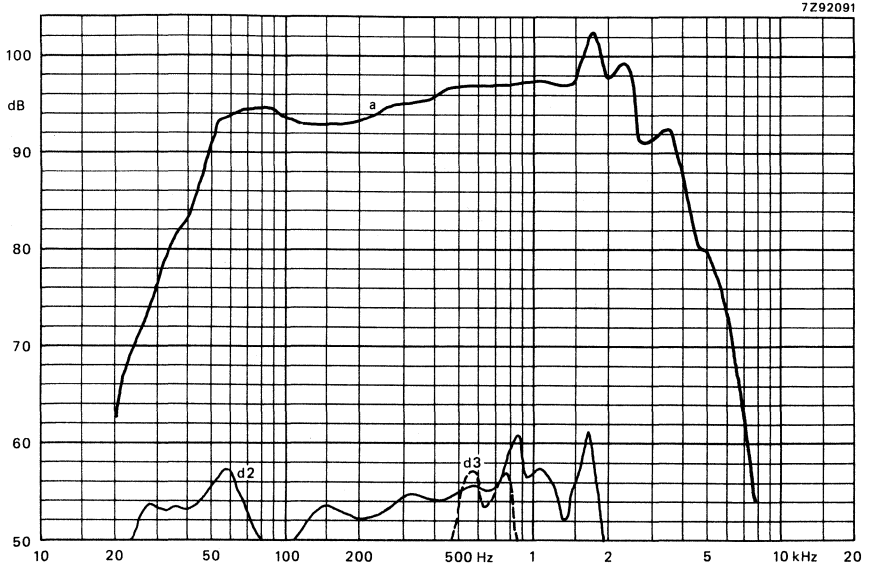


Fig. 2.

AVAILABLE VERSIONS

AD10672/W8. catalogue number 2422 257 31724 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure


Curves d2 and d3: 2nd and 3rd harmonic distortion.

1 inch HI-FI DOME TWEETER LOUDSPEAKERS

TECHNICAL DATA

	version		
	T4	T8	
Rated impedance	4	8	Ω
Voice coil resistance	3,4	6,3	Ω
Resonance frequency		1500	Hz
Power handling capacity, a/b, measured with filter, see Fig. 1			
2000 Hz	12 μ F – 0,35 mH	20/4	W
	8 μ F – 0,5 mH	20/4	W
4000 Hz	5 μ F – 0,2 mH	50/6	W
	3,2 μ F – 0,35 mH	50/6	W
Operating power (sound level 90 dB, 1 m)		3	W
Sweep voltage (500 to 20 000 Hz); filter:			
12 μ F – 0,35 mH	1,5		V
8 μ F – 0,5 mH		2,1	V
Energy in air gap		66,78	mJ
Flux density		0,98	T
Air-gap height		2,5	mm
Voice coil height	2,2	2,8	mm
Core diameter		25	mm
Magnet material		ceramic	
diameter		60	mm
mass		0,1	kg
Mass of loudspeaker		0,29	kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers AD11400/T. have a textile dome; AD11410/T. have a polycarbonate dome.

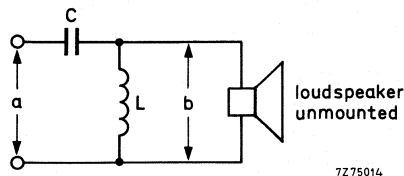

7Z75014

Fig. 1 Measuring circuit.
a = system power handling capacity.
b = loudspeaker power handling capacity.

Dimensions in mm

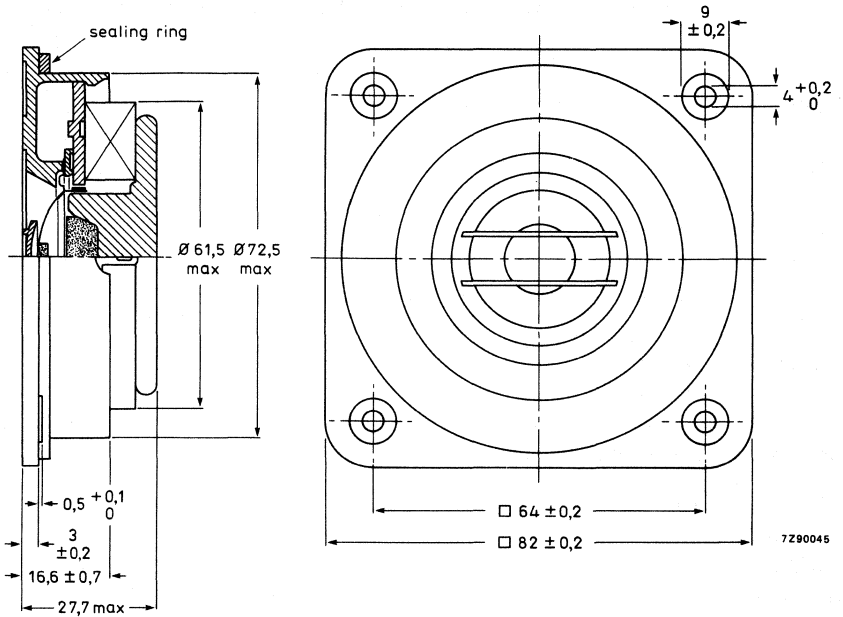


Fig. 2.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD11400/T4 catalogue number 2422 257 43421
- AD11400/T8 catalogue number 2422 257 43422
- AD11410/T4 catalogue number 2422 257 43424
- AD11410/T8 catalogue number 2422 257 43425

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 3)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

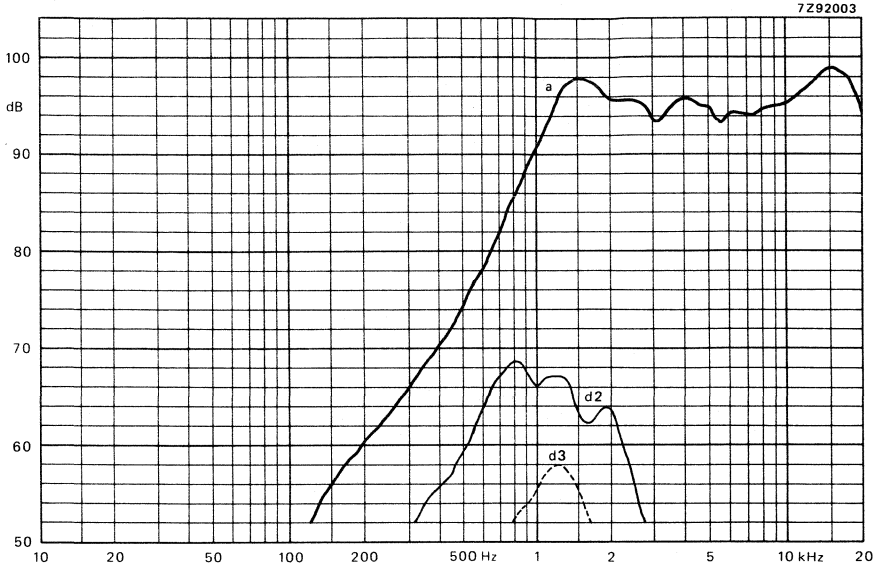


Fig. 3.

1 inch HI-FI DOME TWEETER LOUDSPEAKER

TECHNICAL DATA

	version		
	T4	T8	
Rated impedance	4	8	Ω
Voice coil resistance	3,4	6,3	Ω
Resonance frequency	1000		Hz
Power handling capacity, loudspeaker mounted on IEC baffle, measured with filter			
10 μ F	3,5		W
5 μ F		3,5	W
Operating power (sound level 90 dB, 1 m)		3	W
Sweep voltage (500 to 20 000 Hz); filter:			
10 μ F	1,5		V
5 μ F		2,1	V
Energy in air gap	66,78		mJ
Flux density	0,98		T
Air-gap height	2,5		mm
Voice coil height	2,2	2,8	mm
Core diameter	25		mm
Magnet material	ceramic		
diameter	60		mm
mass	0,1		kg
Mass of loudspeaker	0,29		kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a textile dome.

Dimensions in mm

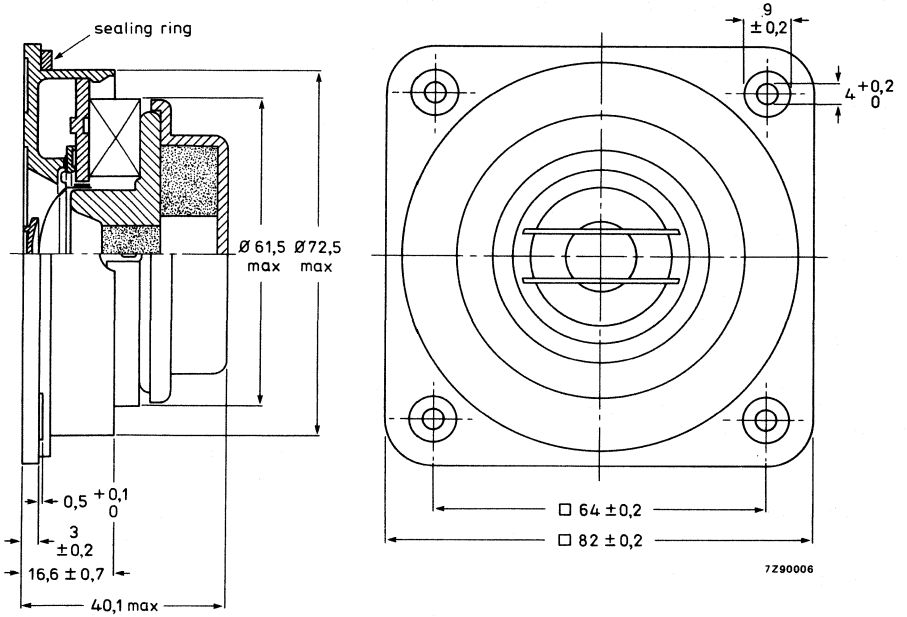


Fig. 1.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11430/T4 catalogue number 2422 257 43427

AD11430/T8 catalogue number 2422 257 43428

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle.

Curve a: Sound pressure.

Curve d2: 2nd harmonic distortion.

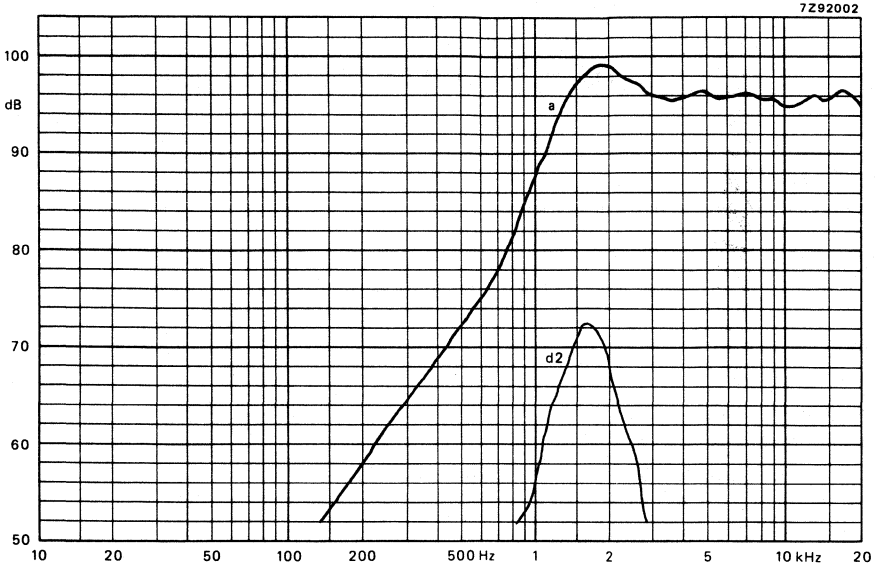


Fig. 2.

1 inch HIGH POWER DOME TWEETER

APPLICATION

For reproduction of high frequencies up to 20 kHz.

TECHNICAL DATA

	version	
	T4	T8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,3 Ω
Rated frequency range	2500 to 20 000 Hz	
Resonance frequency	1300	Hz
Power handling capacity, a/b, measured with filter, see Fig. 1, at 2000 Hz, C = 12 μF, L = 0,35 mH	20/4	W
at 2000 Hz, C = 8 μF, L = 0,5 mH		20/4
at 4000 Hz, C = 5 μF, L = 0,2 mH	50/6	
at 4000 Hz, C = 3,2 μF, L = 0,35 mH		50/6
Operating power (sound level 90 dB, 1 m)	1,2	W
Sweep voltage (500 to 20 000 Hz) with filter 12 μF – 0,35 mH	1,1	V
with filter 5 μF – 0,2 mH		1,5 V
Energy in air gap	117,5	mJ
Flux density	1,3	T
Air-gap height	2,5	mm
Voice coil height	2,2	2,7 mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	72	mm
mass	0,24	kg
Mass of loudspeaker	0,6	kg

The loudspeaker has a textile dome. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

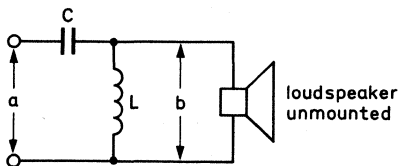


Fig. 1 Measuring circuit.

a = system power handling capacity.
b = loudspeaker power handling capacity.

7275014

Dimensions in mm

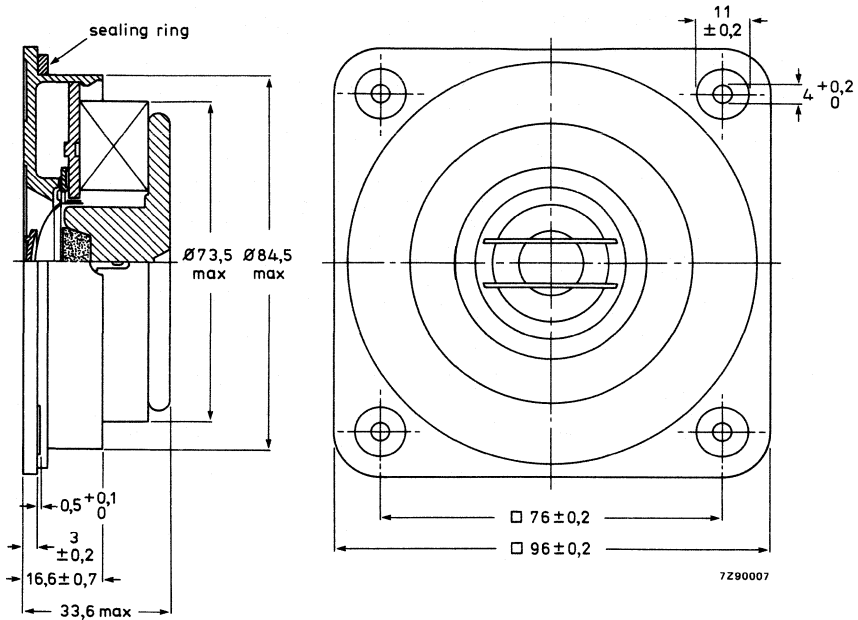


Fig. 2.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11600/T4 catalogue number 2422 257 43521

AD11600/T8 catalogue number 2422 257 43522

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 3)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curve d2: 2nd harmonic distortion.

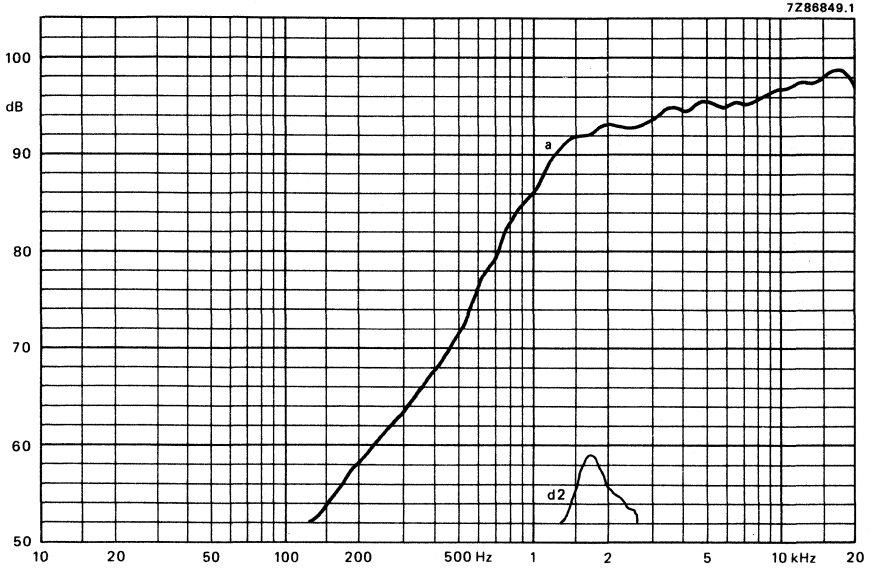



Fig. 3.

1 inch HIGH POWER DOME TWEETER

TECHNICAL DATA

	version	
	T4	T8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,3 Ω
Resonance frequency		1300 Hz
Power handling capacity, a/b, measured with filter, see Fig. 1		
2000 Hz 12 μ F – 0,35 mH	20/4	W
2000 Hz 8 μ F – 0,5 mH		20/4 W
4000 Hz 5 μ F – 0,2 mH	50/6	W
4000 Hz 3,2 μ F – 0,35 mH		50/6 W
Operating power (sound level 90 dB, 1 m)		1,2 W
Sweep voltage (500 to 20 000 Hz); filter:		
12 μ F – 0,35 mH	1,1	V
8 μ F – 0,5 mH		1,5 V
Energy in air gap	117,5	mJ
Flux density	1,38	T
Air-gap height	2,5	mm
Voice coil height	2,2	2,7 mm
Core diameter		25 mm
Magnet material		ceramic
diameter		72 mm
mass		0,24 kg
Mass of loudspeaker		0,57 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers AD11400/T. have a polycarbonate dome.

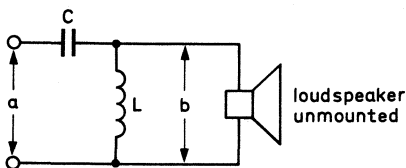

7275014

Fig. 1 Measuring circuit.

a = system power handling capacity.

b = loudspeaker power handling capacity.

Dimensions in mm

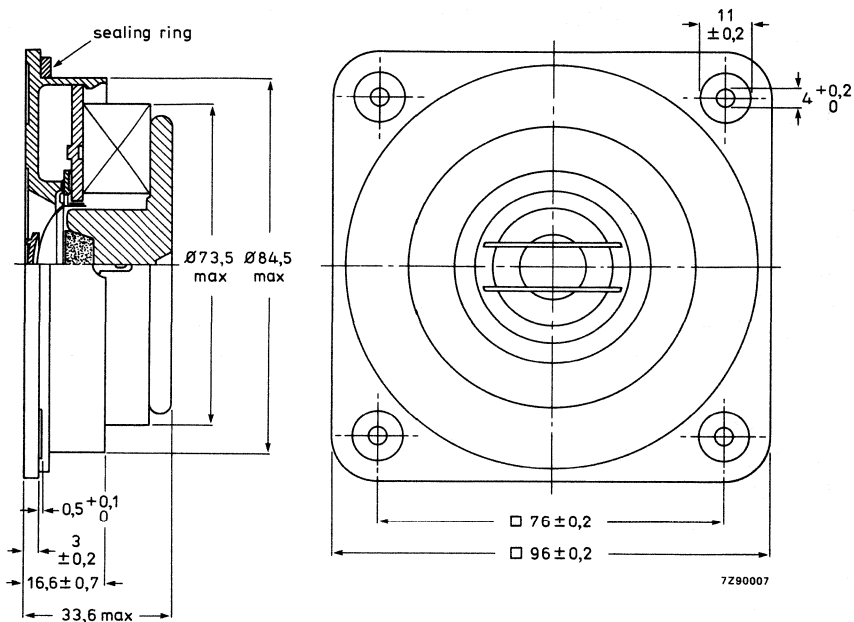


Fig. 2.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11610/T4 catalogue number 2422 257 43524
 AD11610/T8 catalogue number 2422 257 43525) These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle.

Curve a: Sound pressure.

Curve d2: 2nd harmonic distortion.

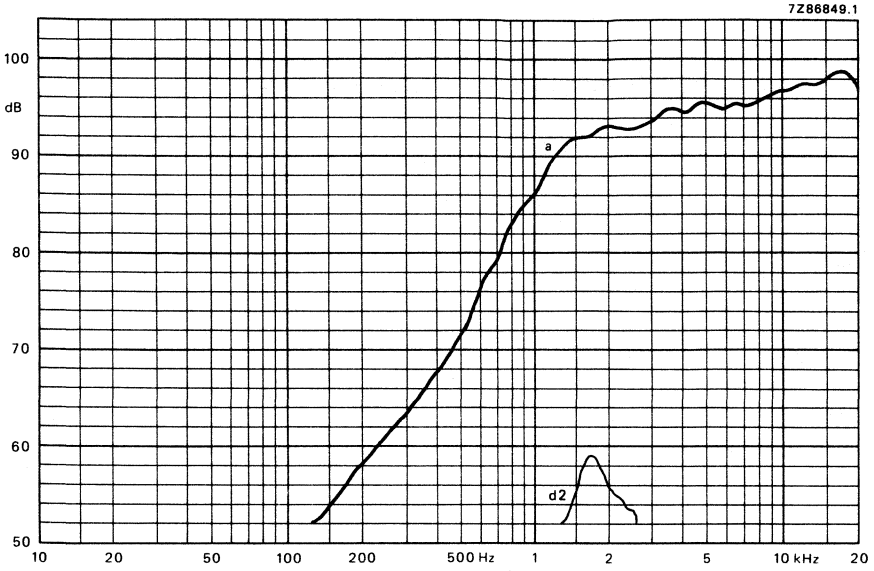


Fig. 3.

1 inch HIGH POWER DOME TWEETER

APPLICATION

For reproduction of high frequencies up to 20 kHz.

TECHNICAL DATA

	version	
	T4	T8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,3 Ω
Rated frequency range	3300	to 20 000 Hz
Resonance frequency		1700 Hz
Power handling capacity, loudspeaker mounted on IEC baffie, measured with filter: C = 10 μ F, L = 0,3 mH C = 5 μ F, L = 0,16 mH	4	W 4 W
Operating power (sound level 90 dB, 1 m)		6 W
Sweep voltage (500 to 20 000 Hz), with filter	2,1	3 V
Energy in air gap		37 mJ
Flux density		0,73 T
Air-gap height		2,5 mm
Voice coil height	2,2	2,7 mm
Core diameter		25 mm
Magnet material		ceramic
diameter		53 mm
mass		0,06 kg
Mass of loudspeaker		0,2 kg

The loudspeaker has a textile dome. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

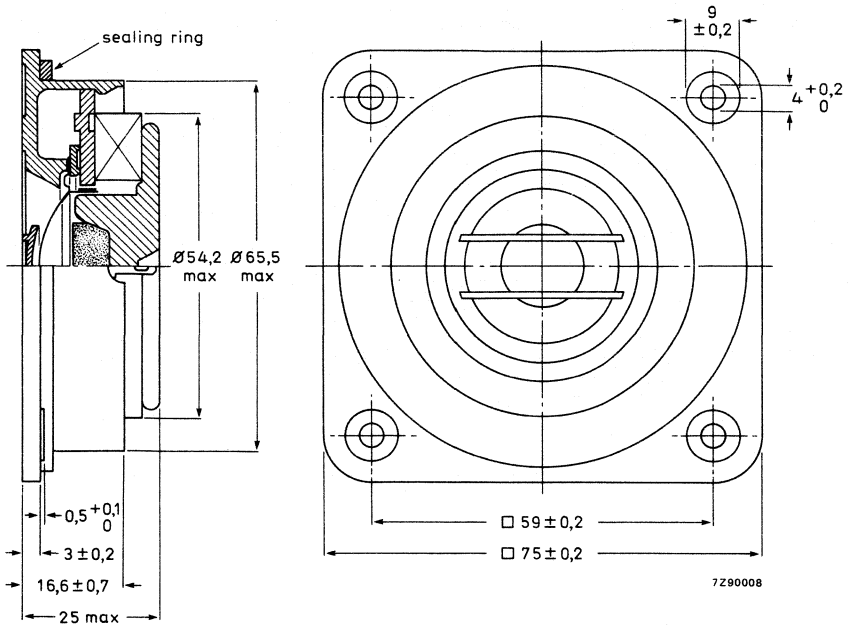


Fig. 1.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11800/T4 catalogue number 2422 257 43321
 AD11800/T8 catalogue number 2422 257 43322 } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

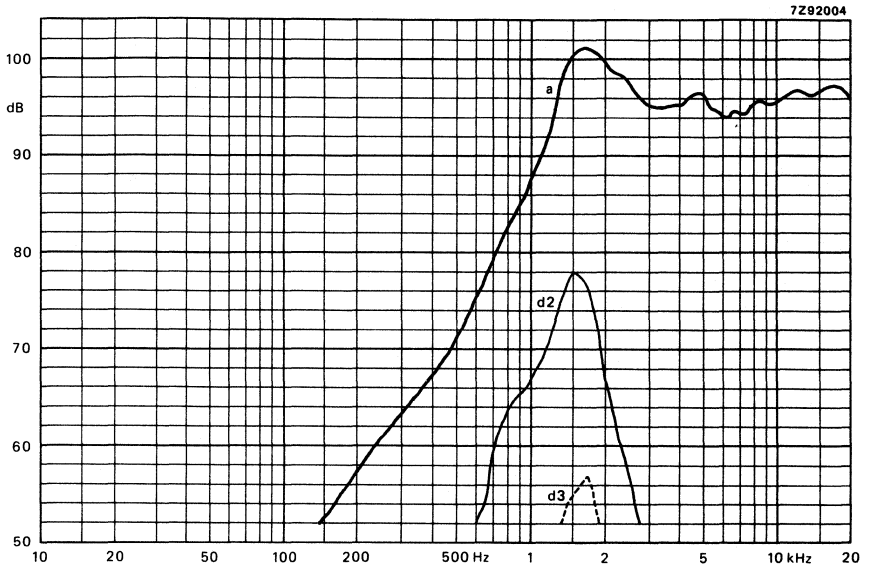


Fig. 2.

1 inch HI-FI DOME TWEETER LOUDSPEAKER

TECHNICAL DATA

	version	
	T4	T8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,3 Ω
Resonance frequency	1600 Hz	
Power handling capacity, loudspeaker mounted on IEC baffle, measured with filter:		
10 μ F – 0,35 mH	4	W
5 μ F – 0,6 mH		4 W
Operating power (sound level 96 dB, 1 m)		3 W
Sweep voltage (500 to 20 000 Hz); filter:		
10 μ F – 0,35 mH	2,1	V
5 μ F – 0,6 mH		3 V
Energy in air gap		37 mJ
Flux density	0,73	T
Air-gap height	2,5	mm
Voice coil height	2,2	2,7 mm
Core diameter		25 mm
Magnet material	ceramic	
diameter		53 mm
mass		0,06 kg
Mass of loudspeaker		0,2 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a polycarbonate dome.

Dimensions in mm

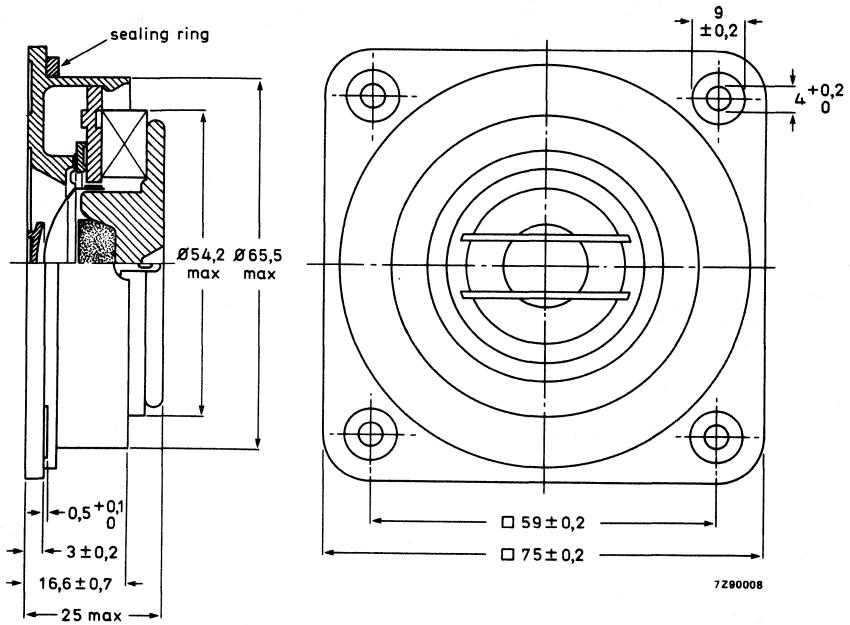


Fig. 1.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11810/T4 catalogue number 2422 257 43324

AD11810/T8 catalogue number 2422 257 43325

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and d3 harmonic distortion.

7Z92005

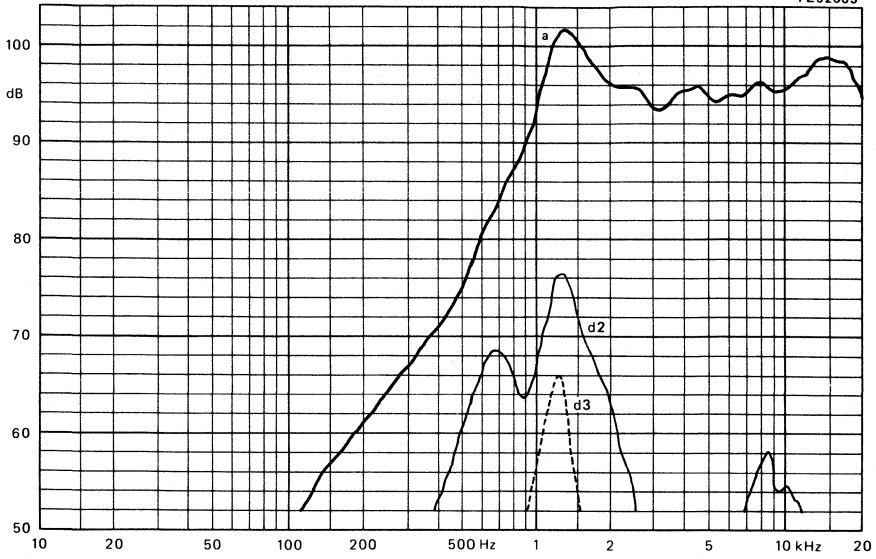


Fig. 2.

1 inch HI-FI DOME TWEETER LOUDSPEAKER

TECHNICAL DATA

	version	
	T4	T8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,3 Ω
Resonance frequency	1000 Hz	
Power handling capacity, loudspeaker mounted on IEC baffle, measured with filter		
10 μ F	4	W
5 μ F		4 W
Operating power (sound level 96 dB, 1 m)		6 W
Sweep voltage (500 to 20 000 Hz); filter:		
10 μ F	2,1	V
5 μ F		3 V
Energy in air gap	37	mJ
Flux density	0,73	T
Air-gap height	2,5	mm
Voice coil height	2,2	2,7 mm
Core diameter	25	mm
Magnet material	ceramic	
→ diameter	53	mm
mass	0,06	kg
Mass of loudspeaker	0,21	kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a textile dome.

Dimensions in mm

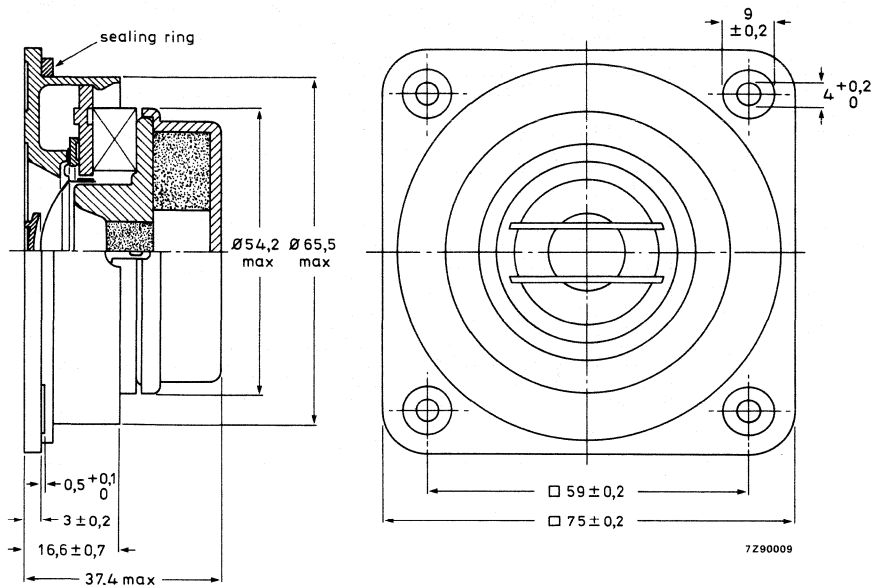


Fig. 1.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD11830/T4 catalogue number 2422 257 43327
 AD11830/T8 catalogue number 2422 257 43328 } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

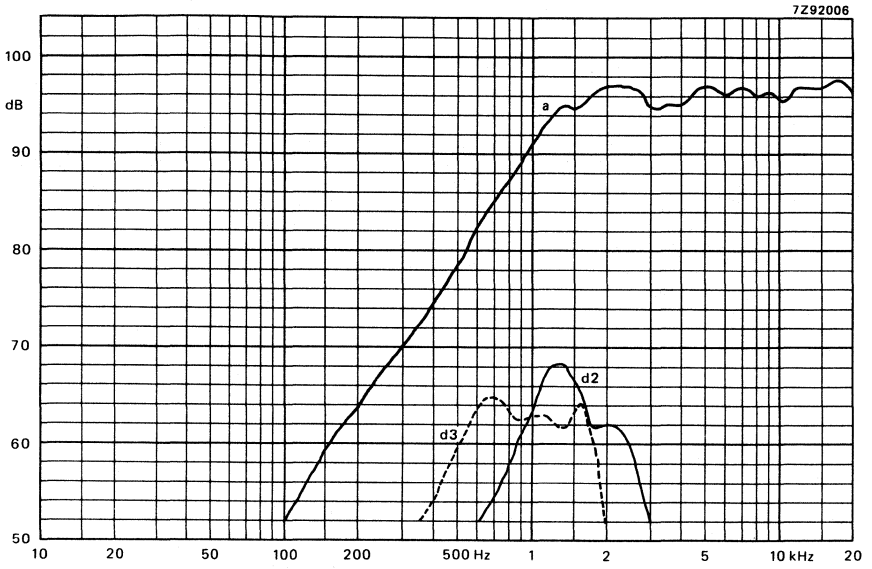


Fig. 2.

12 inch HIGH POWER FULL RANGE LOUDSPEAKERS

APPLICATION

A dual-cone loudspeaker with extremely high sensitivity for power applications such as public address systems, discotheques and other enclosed with recommended volume of 80 litres, or open baffles.

TECHNICAL DATA

	version	
	M4	M8
Rated impedance	4	8 Ω
Voice coil resistance	3,5	6 Ω
Rated frequency range	50 to 12 000 Hz	
Resonance frequency	45	Hz
Power handling capacity, loudspeaker unmounted measured without filter	100	W
Maximum power on loudspeaker	150	W
Operating power	0,78	0,5 W
Characteristic sensitivity	t.b.a.	98 dB
Sweep voltage, frequency: 35 to 20 000 Hz	6,3	9 V
Energy in air gap	499	498 mJ
Flux density	1,10	1,11 T
Force factor (B x l) at 1 A	9,4	9,3 Wb/m
Total moving mass	32 g	
Compliance, loudspeaker unmounted	0,46	0,4 mm/N
Quality factor, loudspeaker mounted in 80 l enclosure		
mechanical	4,14	4,29
electrical	0,57	0,97
total	0,50	0,80
Air-gap length	1,15	mm
Air-gap height	8	mm
Voice coil height	9,7	mm
Core diameter	35	mm
Piston diameter	0,25	m
Piston area	0,049	m ²
Magnet material	ceramic	
diameter	121	mm
mass	0,99	kg
Mass of loudspeaker	1,65	kg
Equivalent box volume	122	l

The loudspeaker has a paper dual cone, a textile rim and a foam gasket on the flange.

Connection to the loudspeaker by means of 5,1 mm (0,2 inch) or 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

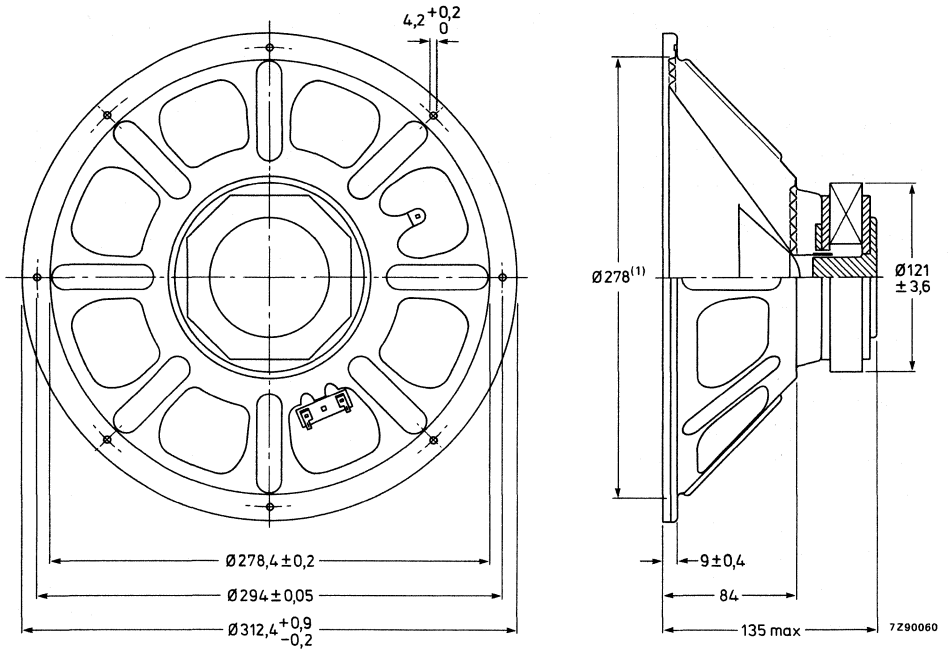


Fig. 1.

(1) Baffle hole-diameter.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD12202/M4 catalogue number 2422 257 51221 | These numbers are for bulk-packed loudspeakers,

AD12202/M8 catalogue number 2422 257 51222 | minimum packing quantity 4 per unit.

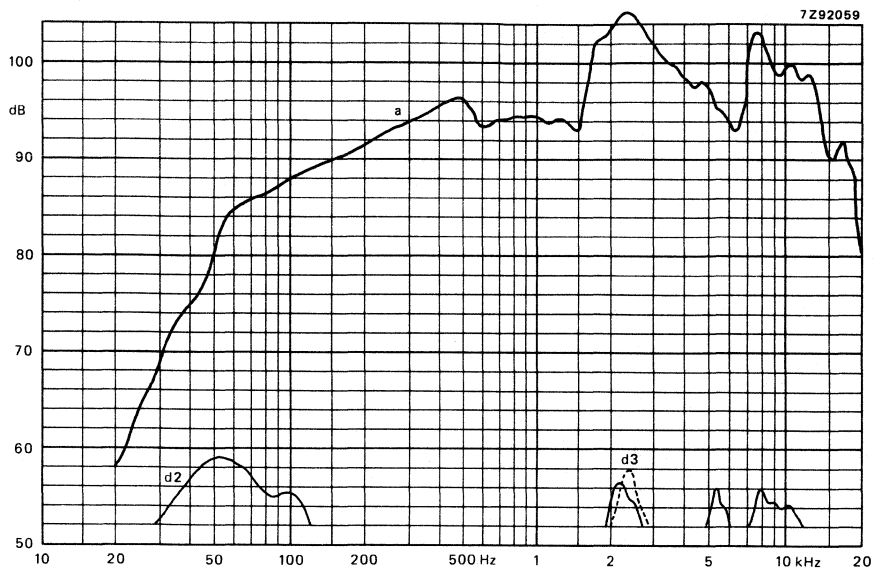


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted in sealed 80 l enclosure.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

12 inch FULL RANGE LOUDSPEAKER

- frame: metal, black lacquered
- come: paper black
- surround: textile
- magnetic compensation: none
- recommended enclosure: 80 l

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6 Ω
Rated frequency range	60 – 6000 Hz
Sensitivity, 1 W/1 m	98 dB
Resonance frequency	45 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	100 W
Maximum power on loudspeaker	150 W
Operating power (sound level 96 dB, 1 m)	0,8 W
Sweep voltage (20 to 20 000 Hz)	9 V
Filter	none
Characteristic sensitivity	dB
Energy in air gap	498 mJ
Flux density	1,11 T
Force factor (Bxl) at 1 A	9,3 Wb/m
Piston diameter	0,25 m
Piston area	0,049 m ²
Total moving mass	32 x 10 ⁻³ kg
Compliance, loudspeaker unmounted	0,4 x 10 ⁻³ m/N
Equivalent boxvolume	112 l
Quality factor, loudspeaker mounted in recommended volume	
mechanical	4,83
electrical	0,98
total	0,81
Air-gap height	8 mm
Air-gap length	1,15 mm
Voice coil height	9,7 mm
Rated core diameter	35 mm
Rated coil diameter	35 mm
Magnet material	ceramic
diameter	121 mm
mass	0,99 kg
Mass of loudspeaker	1,65 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

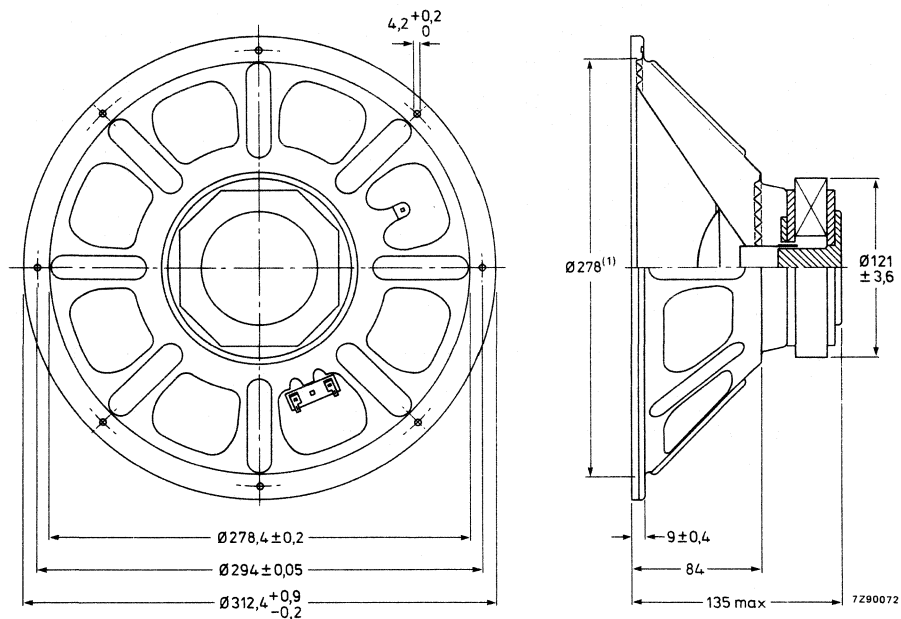


Fig. 1.

- (1) Recommended baffle opening ($\varnothing 278$ mm) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD12202/P8, catalogue number 2422 257 51224

This number is for bulk-packed loudspeakers. Minimum packing quantity: 4 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

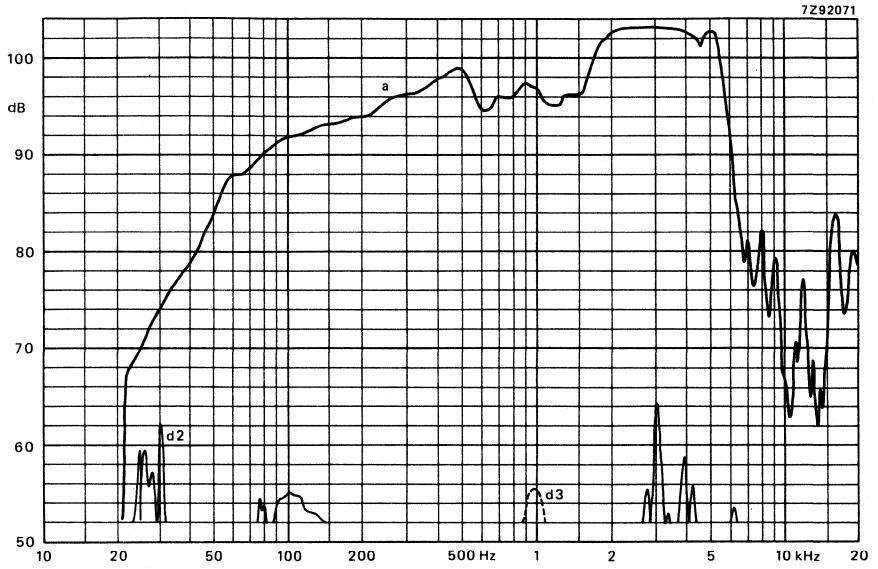


Fig. 2.

12 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,7 Ω
Rated frequency range	up to 1500 Hz
Resonance frequency	24 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	80 W
Max. power on loudspeaker	150 W
Operating power (sound level 96 dB, 1 m)	5 W
Sweep voltage (20 to 2000 Hz)	10 V
Filter	none
Characteristic sensitivity	89 \pm 2 dB
Energy in air gap	508 mJ
Flux density	0,72 T
Force factor (Bxl) at 1A	13 Wb/m
Piston area	490 cm ²
Total moving mass	0,062 kg
Compliance, loudspeaker unmounted	0,76 x 10 ⁻³ m/N
Equivalent box volume	219 l
Quality factor, loudspeaker unmounted	
mechanical	3,77
electrical	0,36
total	0,33
Air-gap height	7 mm
Air-gap length	2,15 mm
Voice coil height	17 mm
Rated coil diameter	50 mm
Magnet material	ceramic
diameter	121 mm
mass	0,850 kg
Mass of loudspeaker	3,0 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

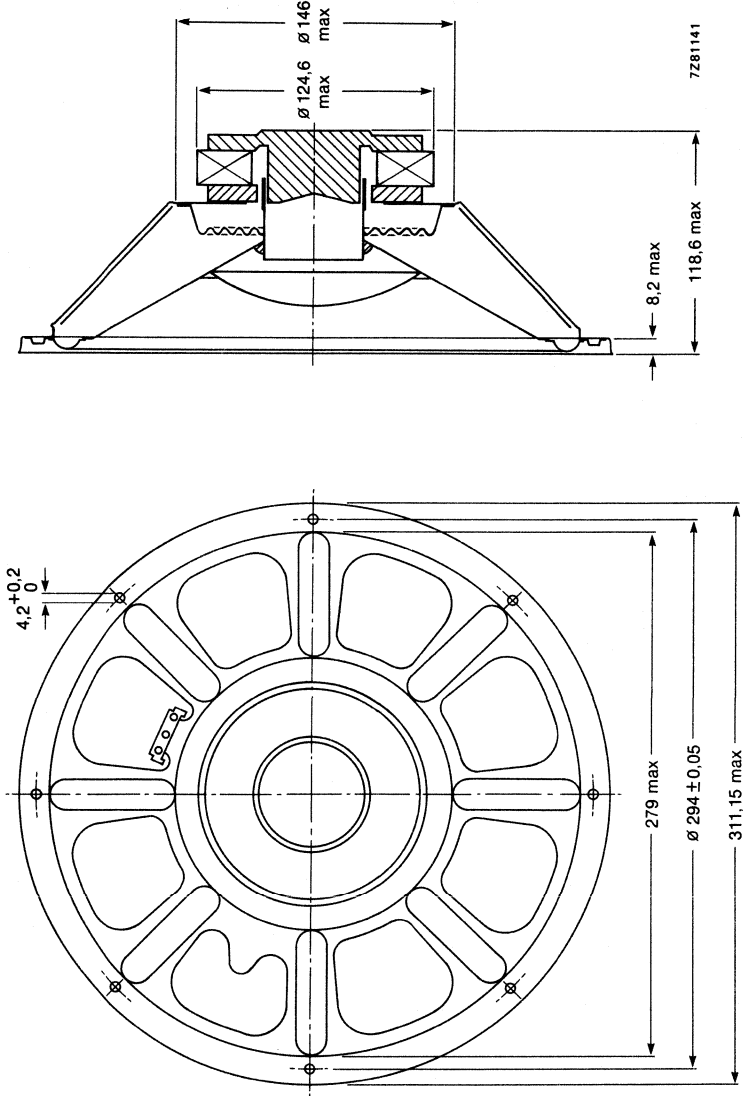


Fig. 1.

Recommended baffle opening ($\varnothing 279$ mm) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

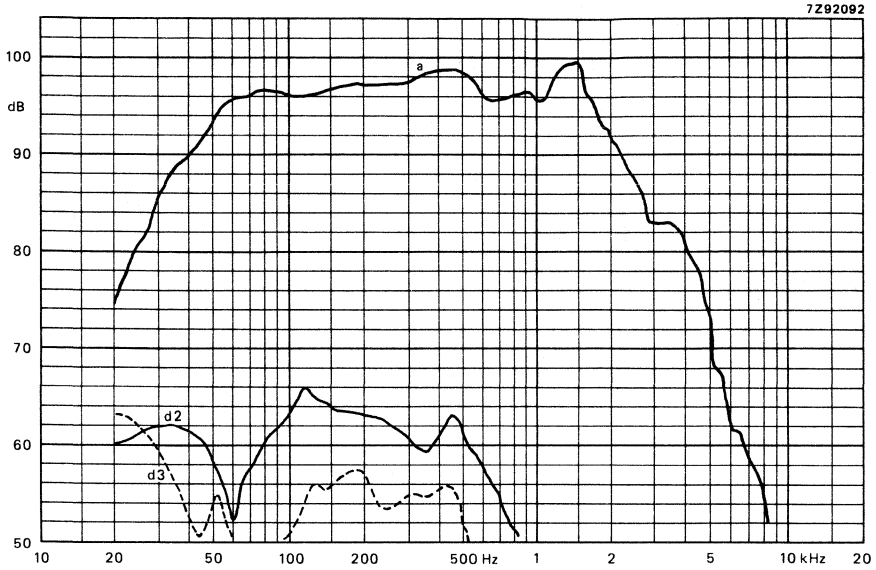


Fig. 2.

AVAILABLE VERSIONS

AD12202/W8 catalogue number 2422 257 31528 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

12 inch HIGH POWER FULL RANGE LOUDSPEAKER

- frame : metal, black lacquered
- cone : paper, black
- rim : textile
- application : public address
- gaskets : PVC profile
- magnetic compensation : none
- recommended enclosure : 80 l

TECHNICAL DATA

	version		
	HP4	HP8	
Rated impedance	4	8	Ω
Voice coil resistance	3,6	7,2	Ω
Rated frequency range	50 to 7000		Hz
Resonance frequency	55		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	150		W
Max. power on loudspeaker	200		W
Operating power (sound level 96 dB, 1 m)	1,1		W
Sweep voltage (20 to 20000 Hz)	10	14	V
Filter	none		
Characteristic sensitivity	t.b.e.		dB
Energy in gap	848		mJ
Flux density	1,12		T
Force factor (Bxl) at 1 A	10,2	12,8	Wb/m
Piston diameter	0,25		m
Piston area	0,049		m ²
Total moving mass	42 x 10 ⁻³		kg
Compliance, loudspeaker unmounted	0,4 x 10 ⁻³		m/N
Equivalent boxvolume	111		l
Quality factor, loudspeaker mounted in recommended volume			
mechanical	4,61	4,62	
electrical	0,65	0,81	
total	0,57	0,69	
Air-gap height	7		mm
Air-gap length	1,5		mm
Voice coil height	13,7		mm
Nominal coil diameter	50		mm
Magnet material	ceramic		
diameter	134		mm
mass	1,15		kg
Mass of loudspeaker	3,65		kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

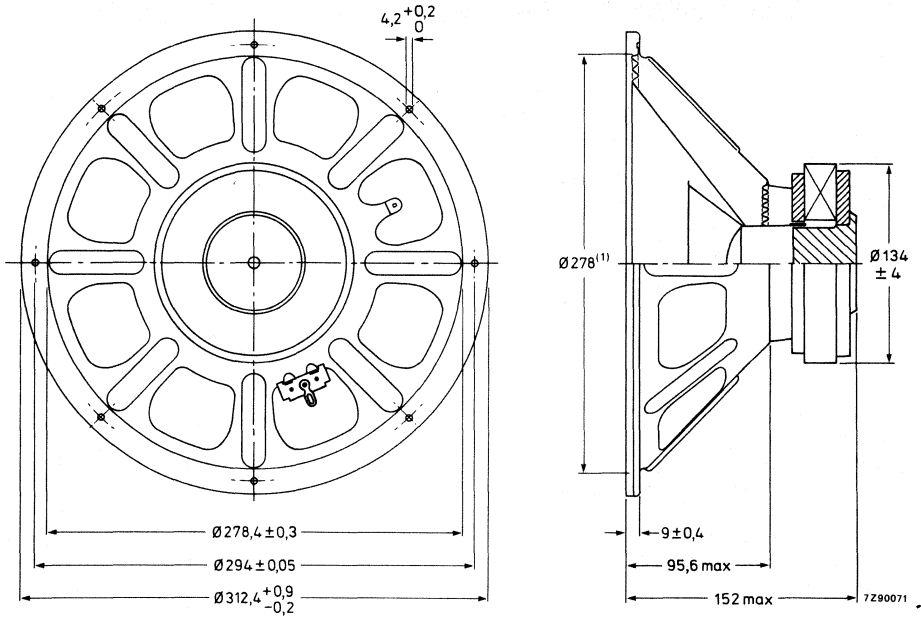


Fig. 1.

Recommended baffle opening ($\varnothing 278 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD12252/HP4 catalogue number 2422 257 51123 | These number are for bulkpacked loudspeakers,
AD12252/HP8 catalogue number 2422 257 51124 | minimum packing quantity: 4 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curve d3: 3rd harmonic distortion.

7292069

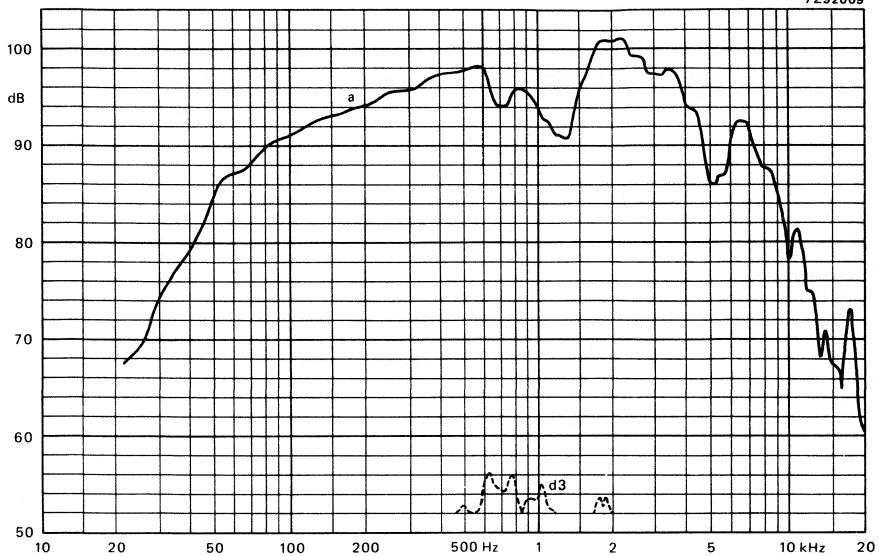


Fig. 2.

12 inch WOOFER LOUDSPEAKER

- frame steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,4 Ω
Rated frequency range	up to 2000 Hz
Resonance frequency	27 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	100 W
Max. power on loudspeaker	150 W
Operating power (sound level 96 dB, 1 m)	2,9 W
Sweep voltage (20 to 2000 Hz)	10 V
Filter	none
Characteristic sensitivity	91 \pm 2 dB
Energy in air gap	803 mJ
Flux density	1,02 T
Force factor (Bxl) at 1A	13,5 Wb/m
Piston area	490 cm ²
Total moving mass	0,052 kg
Compliance, loudspeaker unmounted	0,7 x 10 ⁻³ m/N
Equivalent box volume	201 l
Quality factor, loudspeaker unmounted	
mechanical	3,2
electrical	0,3
total	0,27
Air-gap height	7 mm
Air-gap length	1,5 mm
Voice coil height	17 mm
Rated coil diameter	50 mm
Magnet material	ceramic
diameter	134 mm
mass	1,150 kg
Mass of loudspeaker	3,8 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

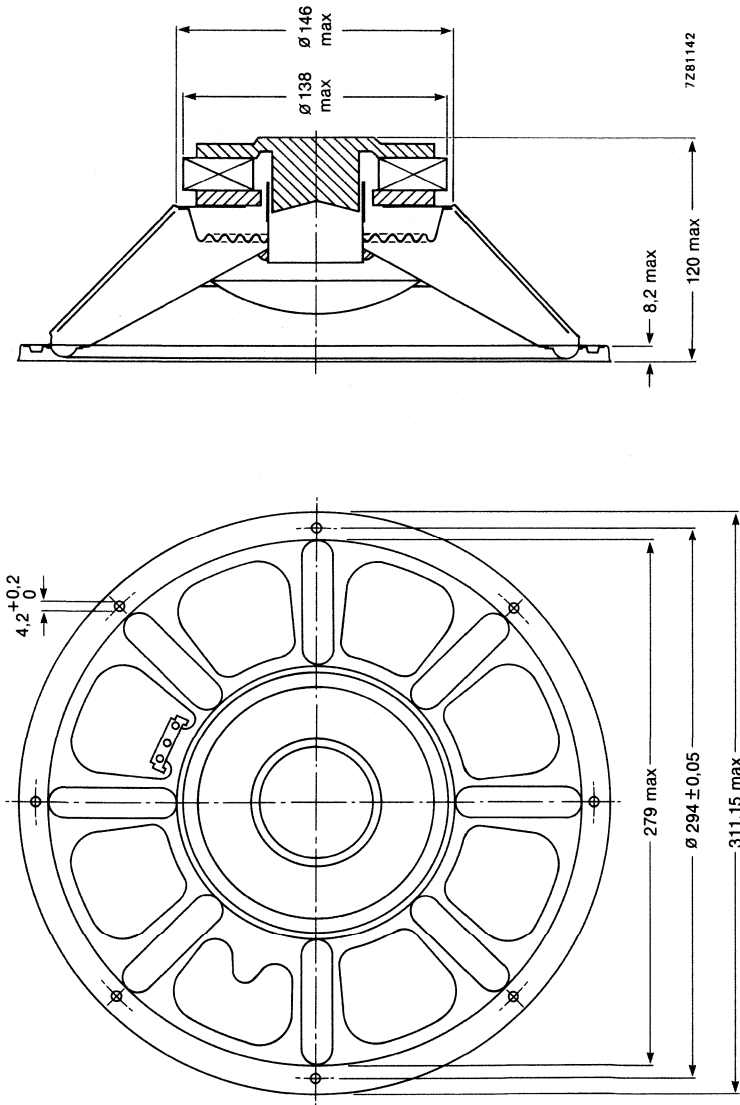


Fig. 1.

Recommended baffle opening ($\varnothing 279$ mm) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

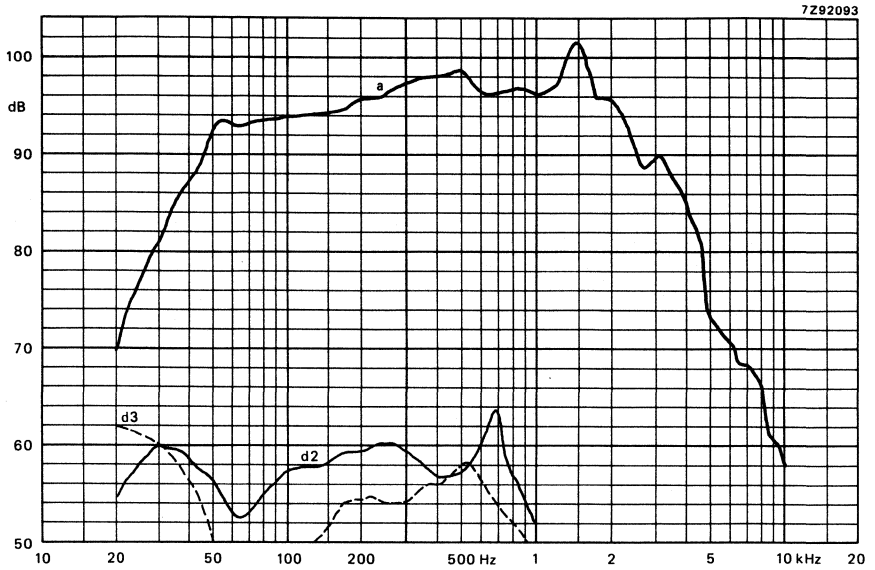


Fig. 2.

AVAILABLE VERSIONS

AD12252/W8 catalogue number 2422 257 61024 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

12 inch LOUDSPEAKERS

- frame: steel, black laquered
- cone: paper, black
- surround: textile
- gaskets: PVC profile
- magnetic compensation: none
- recommended enclosure: 80 l

TECHNICAL DATA

	version			
	M4	M8	P4	
Rated impedance	4	8	4	Ω
Voice coil resistance	3,5	6,6	3,5	Ω
Rated frequency range	50 to 12 000	12 000	5 000	Hz
Sensitivity		93		dB
Resonance frequency		45		Hz
Power handling capacity, measured without filter, loudspeaker unmounted		60		W
Max. power on loudspeaker		100		W
Operating power (sound level 96 dB, 1 m)		2		W
Sweep voltage (20 to 20 000 Hz)	6,4	9	6,4	V
Filter		none		
Energy in air gap		251		mJ
Flux density		0,887		T
Force factor (Bxl) at 1 A	5,6	6,85	5,6	Wb/m
Piston diameter		0,25		m
Piston area		0,049		m ²
Total moving mass		0,032		kg
Compliance, loudspeaker unmounted	0,4	0,4	$0,48 \times 10^{-3}$	m/N
Equivalent box volume		113		l
Quality factor, loudspeaker mounted in recommended volume				
mechanical	5,54	5,54	5,15	
electrical		1,57		
total		1,22		
Air-gap height		5		mm
Air-gap length		1,15		mm
Voice coil height		9,7		mm
Rated coil diameter		35		mm
Magnet material		ceramic		
diameter		90		mm
mass		0,415		kg
Mass of loudspeaker		1,8		kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

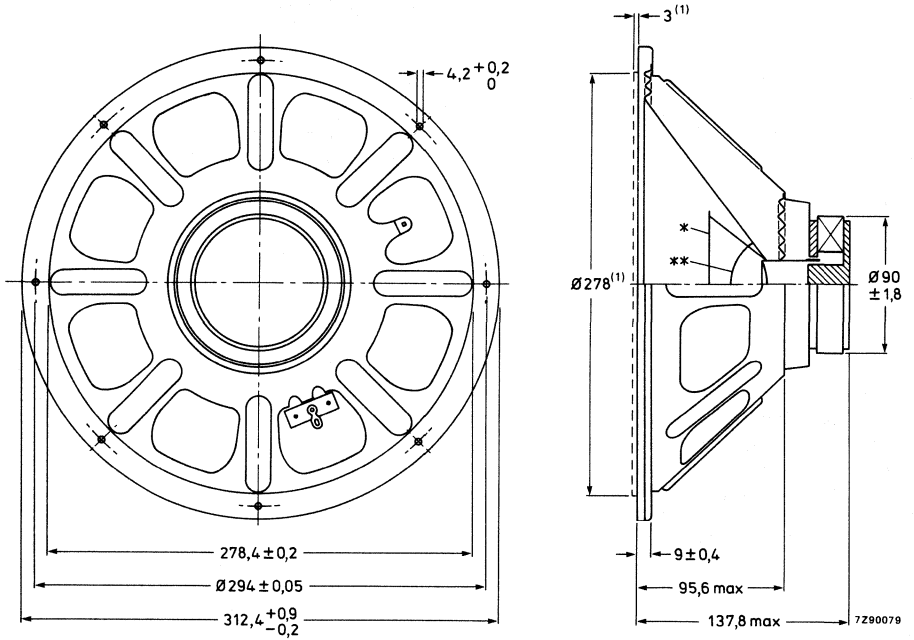


Fig. 1.

* Double cone for M versions.

** P version only.

- (1) Recommended baffle opening ($\varnothing 278 \text{ mm}$) and mounting clearance (3 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD12672/M4	catalogue number	2422 257 41124	} These numbers are for bulk-packed loudspeakers.
AD12672/M8	catalogue number	2422 257 41125	
AD12672/P4	catalogue number	2422 257 41126	

FREQUENCY RESPONSE CURVES (see Figs 2 and 3)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

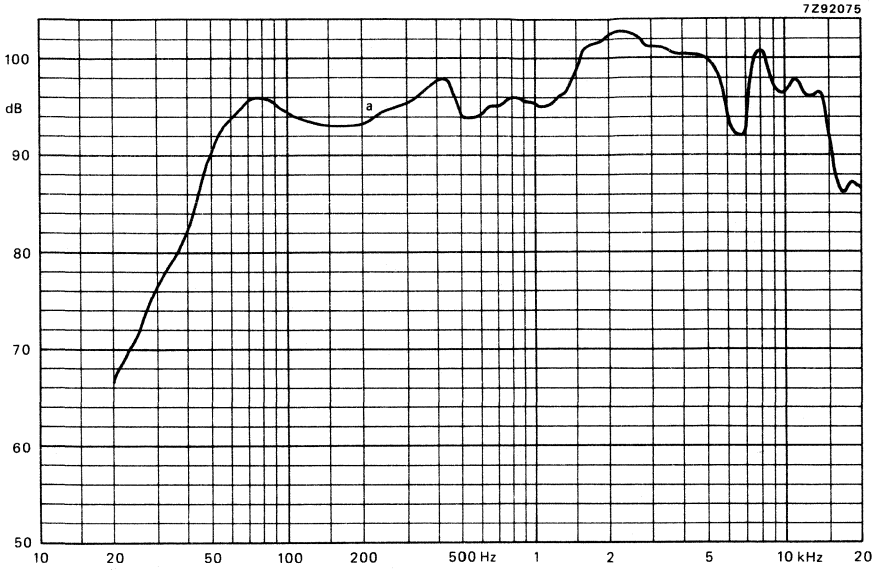


Fig. 2 AD12672/M..

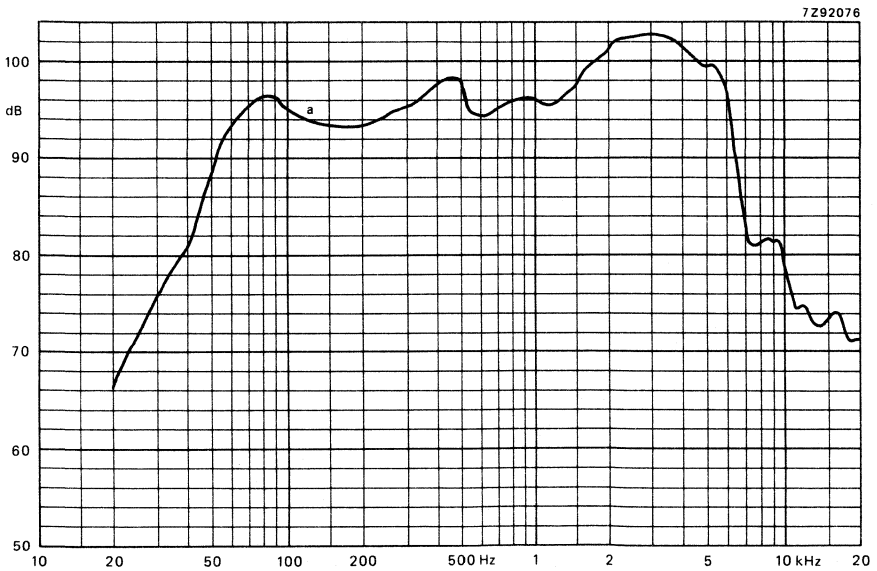


Fig. 3 AD12672/P4.

12 inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: foam, grey
- dust cap: textile, black

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	5,9 Ω
Rated frequency range	up to 1800 Hz
Resonance frequency	26 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h, continuous	60 W
Max. power on loudspeaker	100 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (20 to 2000 Hz)	8,5 V
Filter	none
Characteristic sensitivity	90 \pm 2 dB
Energy in air gap	248 mJ
Flux density	0,72 T
Force factor (Bxl) at 1 A	7,7 Wb/m
Piston area	490 cm ²
Total moving mass	0,049 kg
Compliance, loudspeaker unmounted	0,85 x 10 ⁻³ m/N
Equivalent box volume	245 l
Quality factor, loudspeaker unmounted	
mechanical	5,67
electrical	0,75
total	0,66
Air-gap height	5 mm
Air-gap length	2,15 mm
Voice coil height	16 mm
Rated coil diameter	35 mm
Magnet material	ceramic
diameter	90 mm
mass	0,530 kg
Mass of loudspeaker	1,8 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

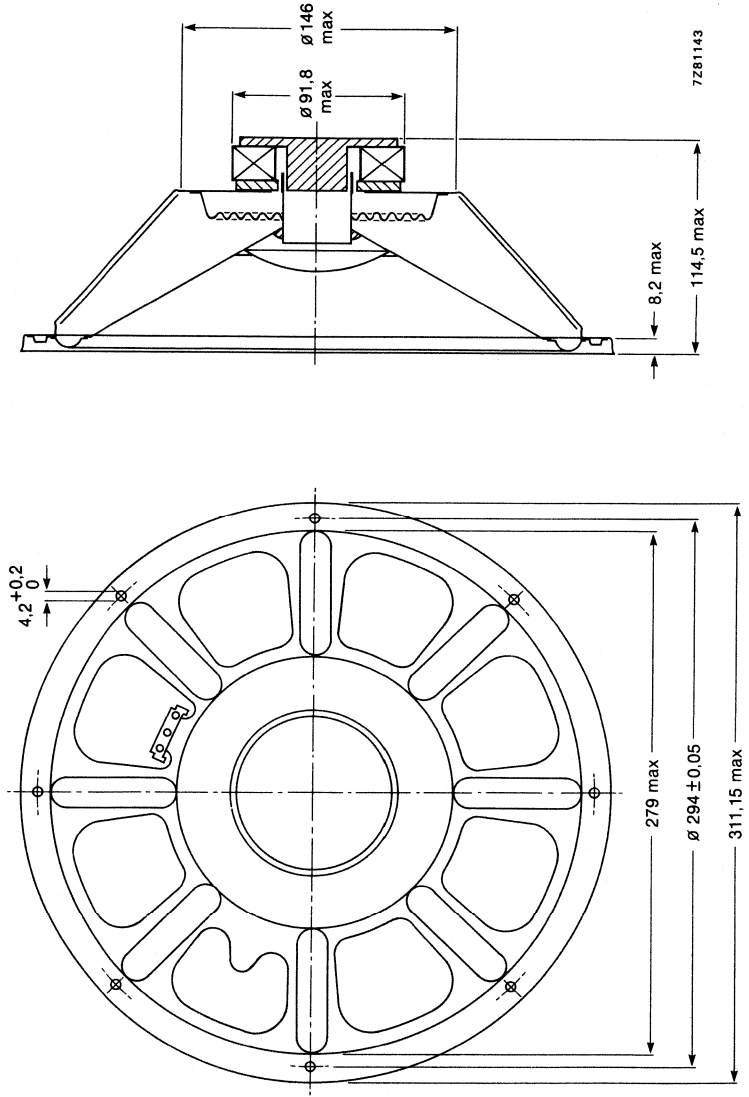


Fig. 1.

Recommended baffle opening ($\phi 278 \text{ mm}$) and mounting clearance (8 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

7Z92094

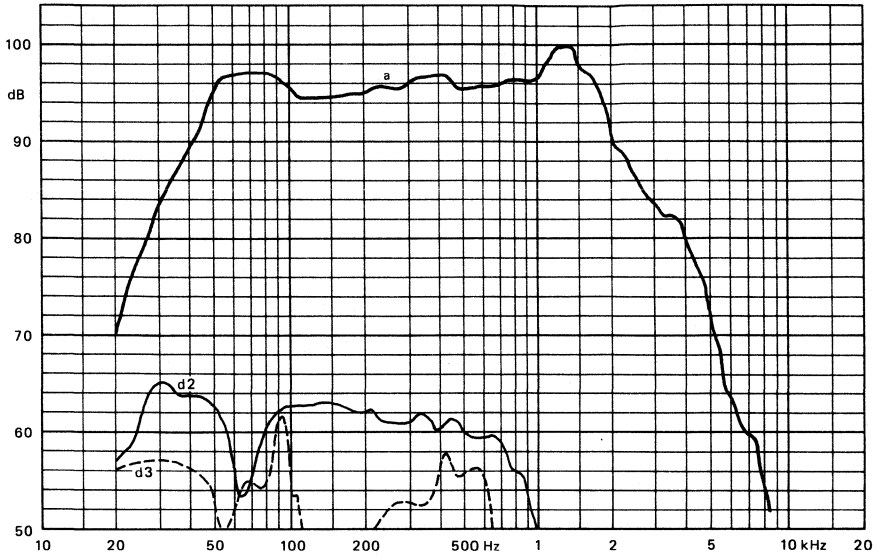


Fig. 2.

AVAILABLE VERSIONS

AD12672/W8 catalogue number 2422 257 31424 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

2 inch HI-FI TWEETER LOUDSPEAKERS

TECHNICAL DATA

	version			
	T4	T8	T15	
Rated impedance	4	8	15	Ω
Voice coil resistance	3,4	6,3	12,5	Ω
Rated frequency range		3 000 to 20 000		Hz
Sensitivity		88		dB
Resonance frequency		2 500		Hz
Cross-over frequency (6 dB/octave slope)		3 000		Hz
Power handling capacity, measured with filter, loudspeaker unmounted, 1 min on, 2 min off		4		W
Max. power on loudspeaker		8		W
Sweep voltage (600 to 20 000 Hz)	3,4	4,9	6,7	V
Filter, in series	12	4,7	2,7	μ F
Energy in air gap		21,5		mJ
Flux density		0,8		T
Air-gap height		2,5		mm
Voice coil height	2,8	2,9	2,9	mm
Rated core diameter		14,5		mm
Magnet material		ceramic		
diameter		36		mm
mass		0,029		kg
Mass of loudspeaker		0,093		kg

Connection is by 2,8 mm x 0,8 mm tag connectors or by soldering.
One tag has a \oplus mark to facilitate phase matching.

AD20303/T.
AD22303/T.

Dimensions in mm

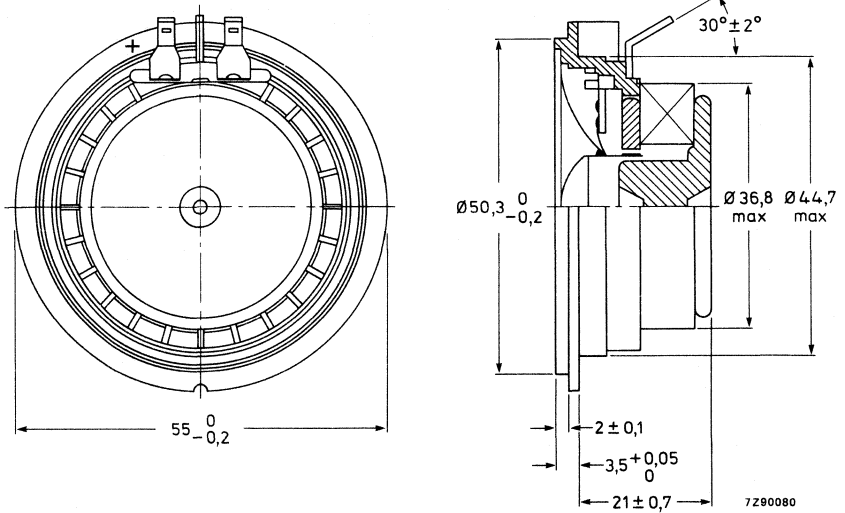


Fig. 1a Round flange type AD20303/T..

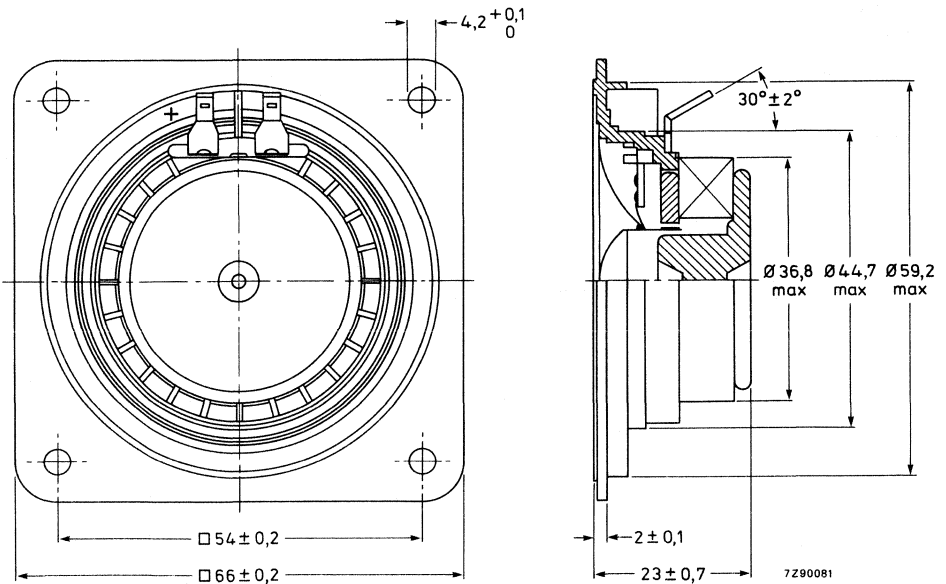


Fig. 1b Square flange type AD22303/T.

AVAILABLE VERSIONS

AD20303/T4	catalogue number	2422 257 32625
AD20303/T8	catalogue number	2422 257 32626
AD20303/T15	catalogue number	2422 257 32627
AD22303/T4	catalogue number	2422 257 32635
AD22303/T8	catalogue number	2422 257 32636
AD22303/T15	catalogue number	2422 257 32637

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

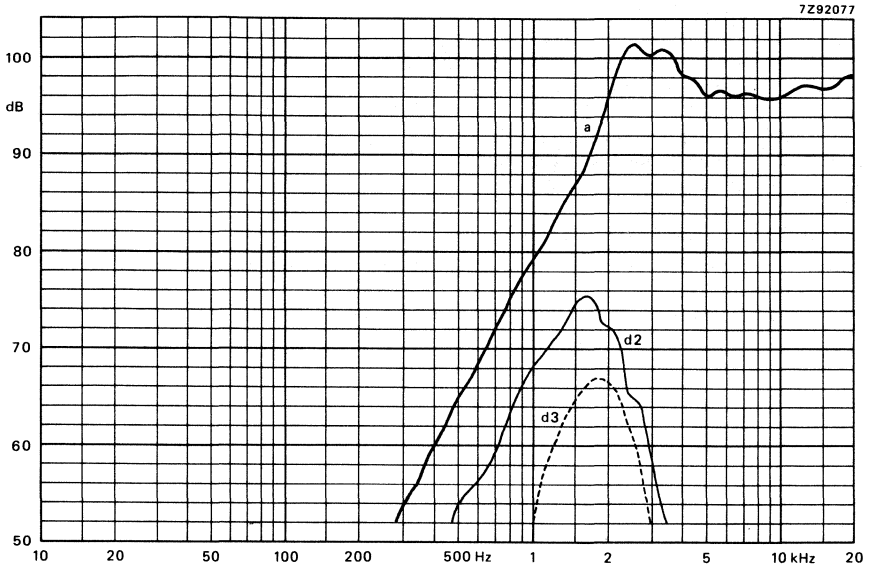


Fig. 2.

2 inch HI-FI TWEETER LOUDSPEAKERS

- for hi-fi video application
- screened magnetic system

TECHNICAL DATA

	version			
	T4	T8	T15	
Rated impedance	4	8	15	Ω
Voice coil resistance	3,4	6,3	12,5	Ω
Rated frequency range		3 000 to 20 000		Hz
Sensitivity		88		dB
Resonance frequency		2 500		Hz
Cross-over frequency (6 dB/octave slope)		3 000		Hz
Power handling capacity, measured with filter, loudspeaker unmounted, 1 min on, 2 min off		4		W
Max. power on loudspeaker		8		W
Sweep voltage (600 to 20 000 Hz)	3,4	4,9	6,7	V
Filter, in series	12	4,7	2,7	μ F
Characteristic sensitivity				dB
Energy in air gap		21,5		mJ
Flux density		0,8		T
Air-gap height		2,5		mm
Voice coil height	2,8	2,9	2,9	mm
Rated core diameter		14,5		mm
Magnet material		ceramic		
diameter		36		mm
mass		0,029		kg
Mass of loudspeaker		0,093		kg

Connection is by 2,8 mm x 0,8 mm tag connectors or by soldering.
One tag has a \oplus mark to facilitate phase matching.

AD20311/T.
AD22311/T.

Dimensions in mm

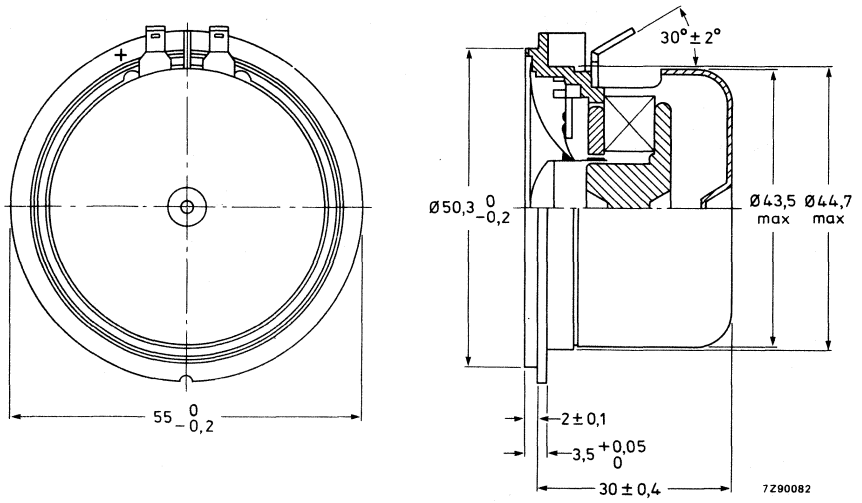


Fig. 1a Round flange type AD20311/T..

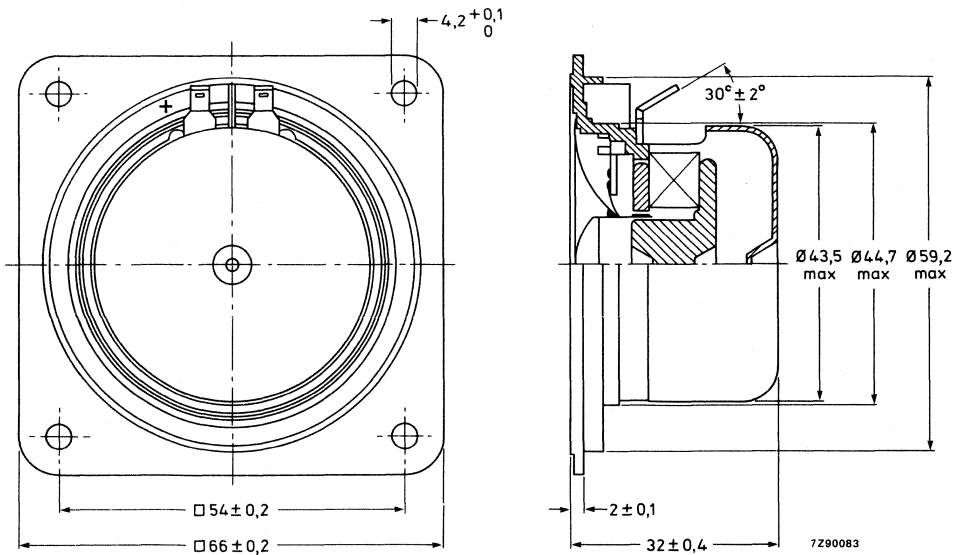


Fig. 1b Square flange type AD22311/T.

AVAILABLE VERSIONS

AD20311/T4 catalogue number 2422 257 32725
AD20311/T8 catalogue number 2422 257 32726
AD20311/T15 catalogue number 2422 257 32727

AD22311/T4 catalogue number 2422 257 32735
AD22311/T8 catalogue number 2422 257 32736
AD22311/T15 catalogue number 2422 257 32737

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

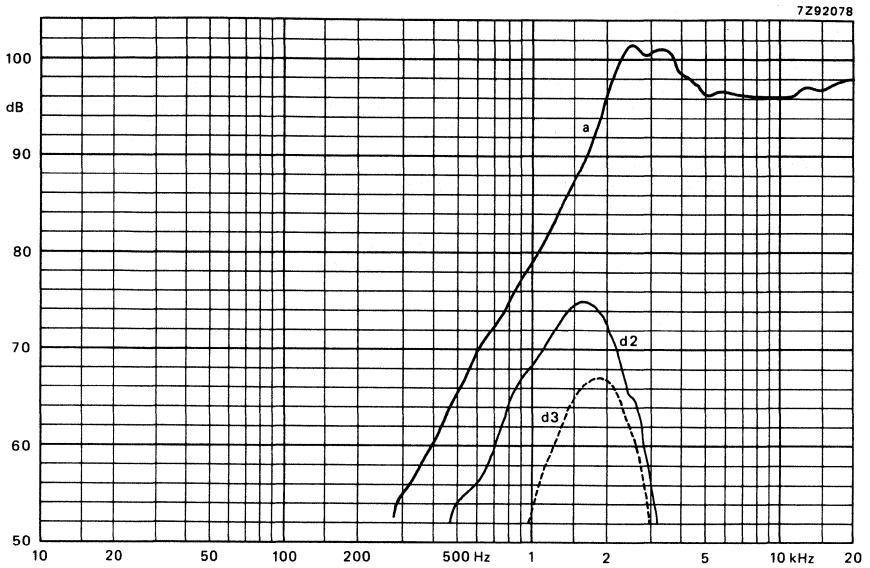


Fig. 2.

DEVELOPMENT DATA

This data sheet contains advance information and specifications are subject to change without notice.

AD20750/Y8

2 inch LOW POWER LOUDSPEAKER

- frame: plastic
- cone: polycarbonate
- surround: polycarbonate
- application: telecommunication
- gaskets: none
- magnetic compensation: none
- recommended enclosure: — —

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7,2 Ω
Rated frequency range	300 to 5000 Hz
Sensitivity	dB
Resonance frequency	350 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	0,3 W
Operating power (sound level 74 dB, 0,5 m)	45 mW
Sweep voltage (300 to 15 000 Hz)	1,1 V
Filter	none
Energy in air gap	5 mJ
Flux density	0,6 T
Air-gap height	2 mm
Air-gap length	mm
Voice coil height	3,6 mm
Rated core diameter	10 mm
Magnet material	ceramic
diameter	26 mm
mass	8 g
Mass of loudspeaker	28,5 g

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

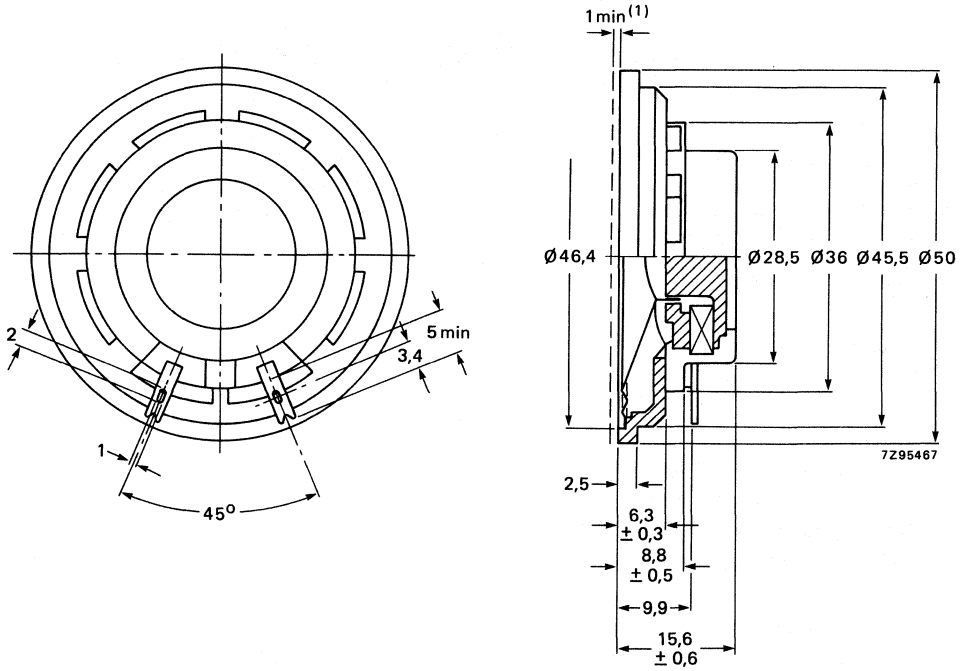


Fig. 1.

(1) Recommended baffle opening (ϕ 45 mm) and mounting clearance (1 mm) are required for cone movement at the specified power handling capacity. One tag has a Θ mark to facilitate phase matching.

AVAILABLE VERSION

→ AD20750/Y8 catalogue number 2403 255 10022 } This number is for bulk packed loudspeakers

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

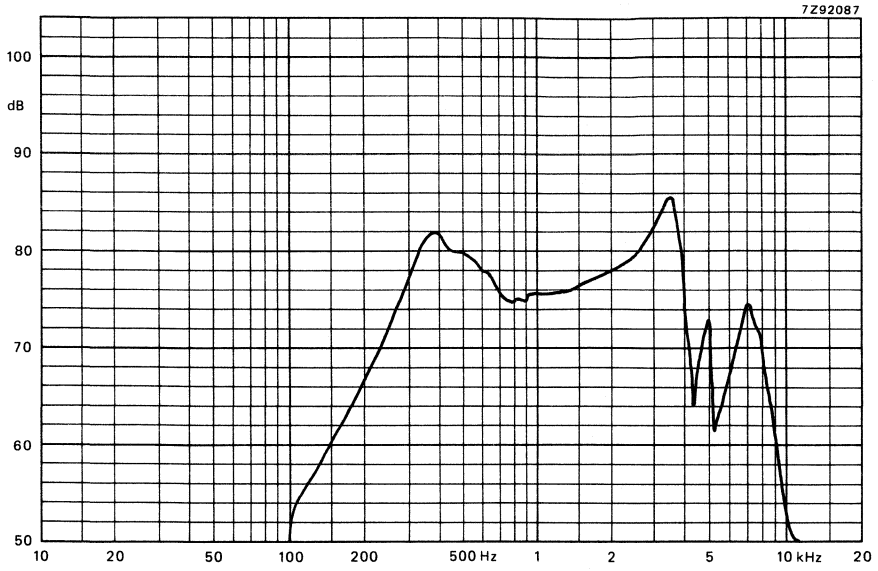


Fig. 2.

2 inch HI-FI TWEETER LOUDSPEAKERS

- high sensitivity

TECHNICAL DATA

	version		
	T4	T8	T15
Rated impedance	4	8	15 Ω
Voice coil resistance	3,4	6,3	12,5 Ω
Rated frequency range	3 000 to 20 000 Hz		
Sensitivity	91		dB
Resonance frequency	2 400		Hz
Cross-over frequency (6 dB/octave slope)	3 000		Hz
Power handling capacity, measured with filter, loudspeaker unmounted, 1 min on, 2 min off	4		W
Max. power on loudspeaker	8		W
Sweep voltage (600 to 20 000 Hz)	2,4	3,4	4,7 V
Filter, in series	12	4,7	2,7 μ F
Energy in air gap	40		mJ
Flux density	1,1		T
Air-gap height	2,5		mm
Air-gap length	2,5		mm
Voice coil height	2,8	2,9	2,9 mm
Rated core diameter	14,5		mm
Magnet material	ceramic		
diameter	46		mm
mass	0,053		kg
Mass of loudspeaker	0,13		kg

Connection is by 2,8 mm x 0,8 mm tag connectors or by soldering.
One tag has a \oplus mark to facilitate phase matching.

Dimensions in mm

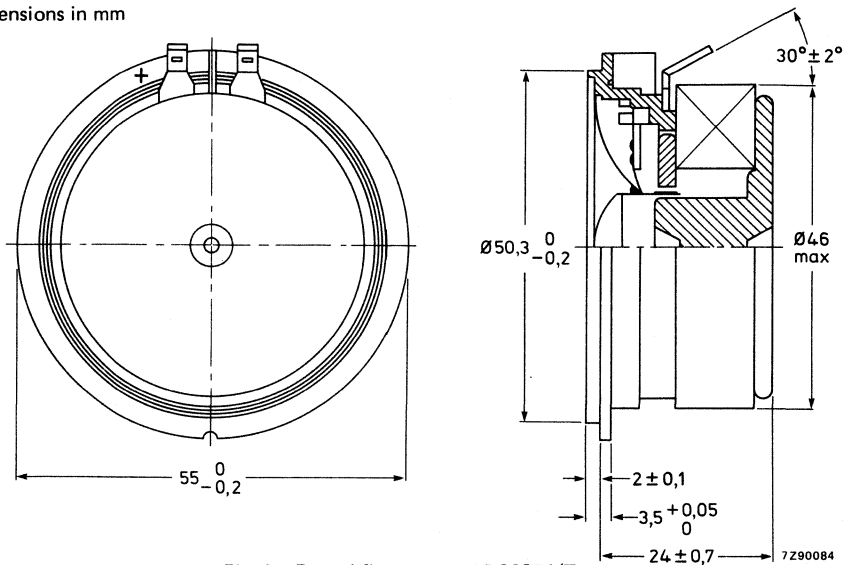


Fig. 1a Round flange type AD20851/T..

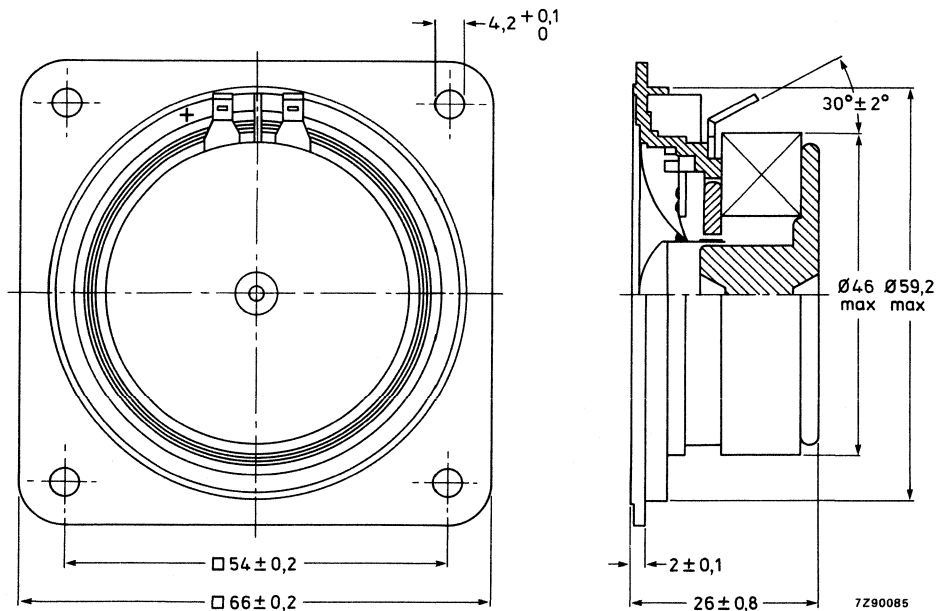


Fig. 1b Square flange type AD22851/T.

AVAILABLE VERSIONS

AD20851/T4 catalogue number 2422 257 42025
AD20851/T8 catalogue number 2422 257 42026
AD20851/T15 catalogue number 2422 257 42027

AD22851/T4 catalogue number 2422 257 42035
AD22851/T8 catalogue number 2422 257 42036
AD22851/T15 catalogue number 2422 257 42037

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

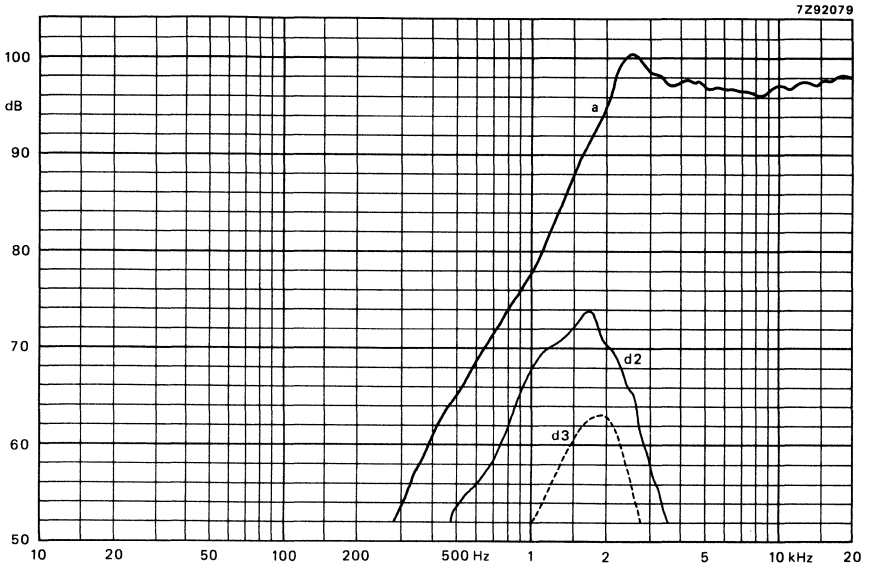


Fig. 2.

RIBBON TWEETER

for very high frequency reproduction

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7 \pm 0,7 Ω
Rated frequency range	2000 to 60 000 Hz
Resonance frequency	not relevant
Power handling capacity, measured with filter: 3,3 μ F – 0,35 mH (1 minute on, 2 minutes off)	10 W
Operating power (sound level 90 dB, 1 m)	2 W
Sweep voltage (1 to 20 kHz) with filter: 3,3 μ F – 0,35 mH	2 V
Flux density	0,36 T
Voice coil height	9 mm
Magnet material	ceramic
dimensions	62 x 62 mm
mass	0,38 kg
Mass of loudspeaker	0,77 kg


Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD21600/RT8 catalogue number 2422 257 52022. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVE (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

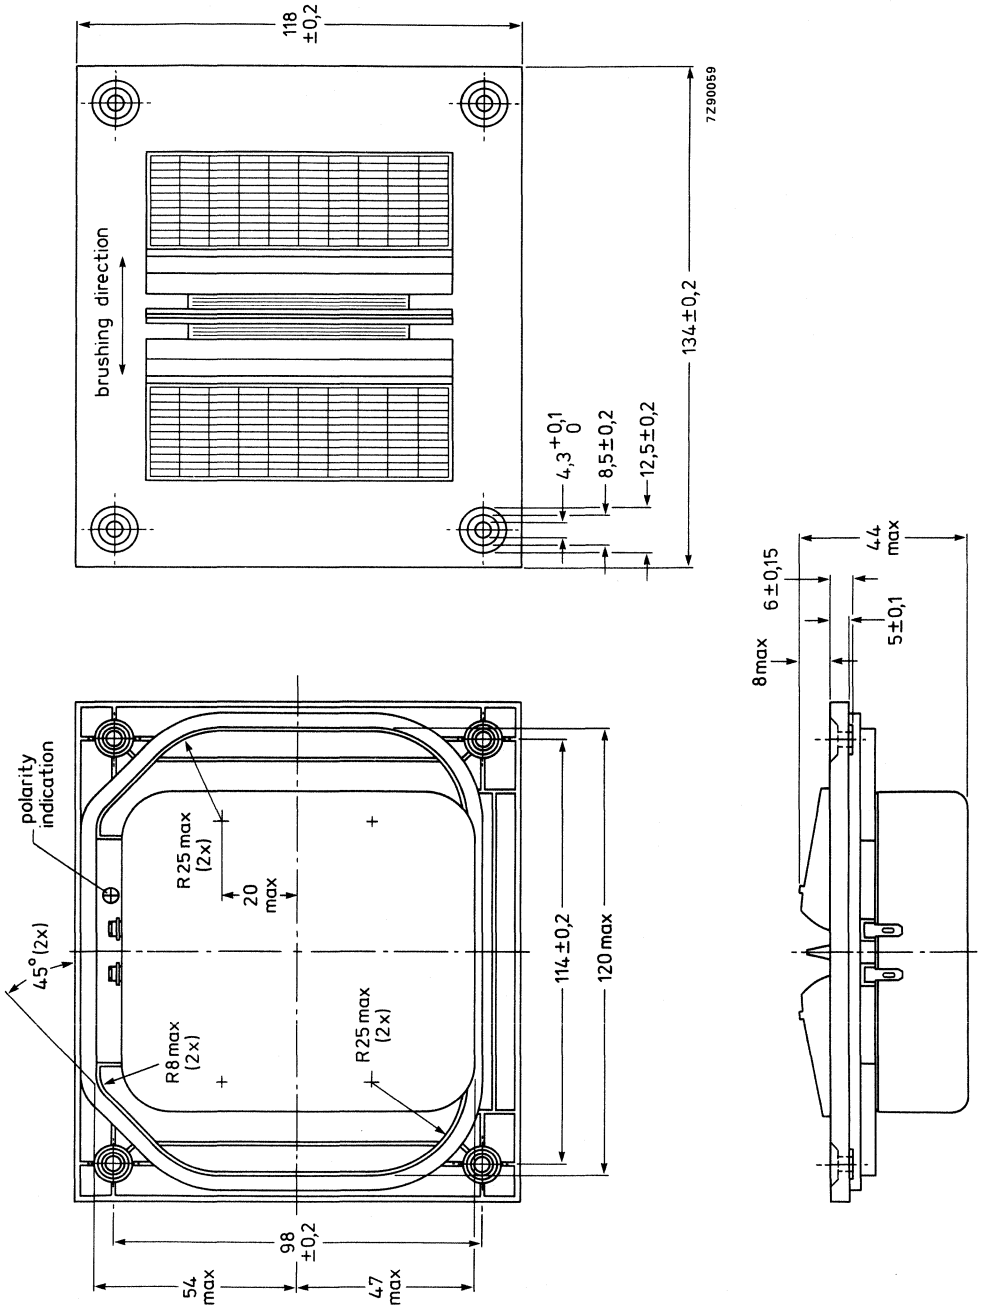

7292058

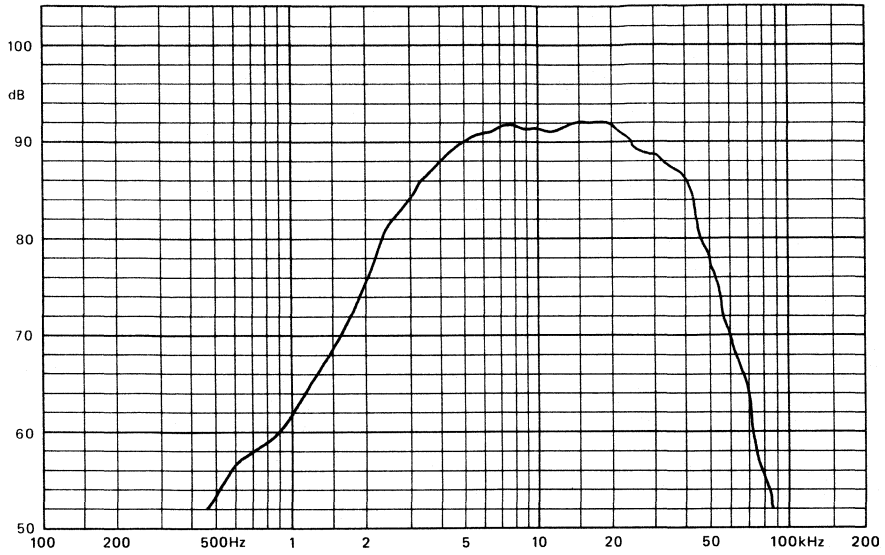


Fig. 2.

2 x 3½ inch FULL RANGE LOUDSPEAKER

- frame: plastic
- cone: paper
- surround: foam
- dust cap: black
- magnetic shielding: DIN 45578

TECHNICAL DATA

Rated impedance	15 Ω
Voice coil resistance	13,2 Ω
Sensitivity	82 dB
Resonance frequency	165 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	4 W
Max. power on loudspeaker	10 W
Operating power (sound level 86 dB, 1 m)	4 W
Sweep voltage (80 to 1000 Hz)	5,4 V
Filter	none
Energy in air gap	15 mJ
Flux density	0,64 T
Air-gap height	2 mm
Voice coil height	3,4 mm
Rated core diameter	11,96 mm
Magnet material	ceramic
square	30 mm
mass	0,0175 kg
Mass of loudspeaker	0,074 kg
Magnetic stray field according to DIN 45578 par. 2.2.5	35 mT

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Screened and compensated versions can be supplied on request.

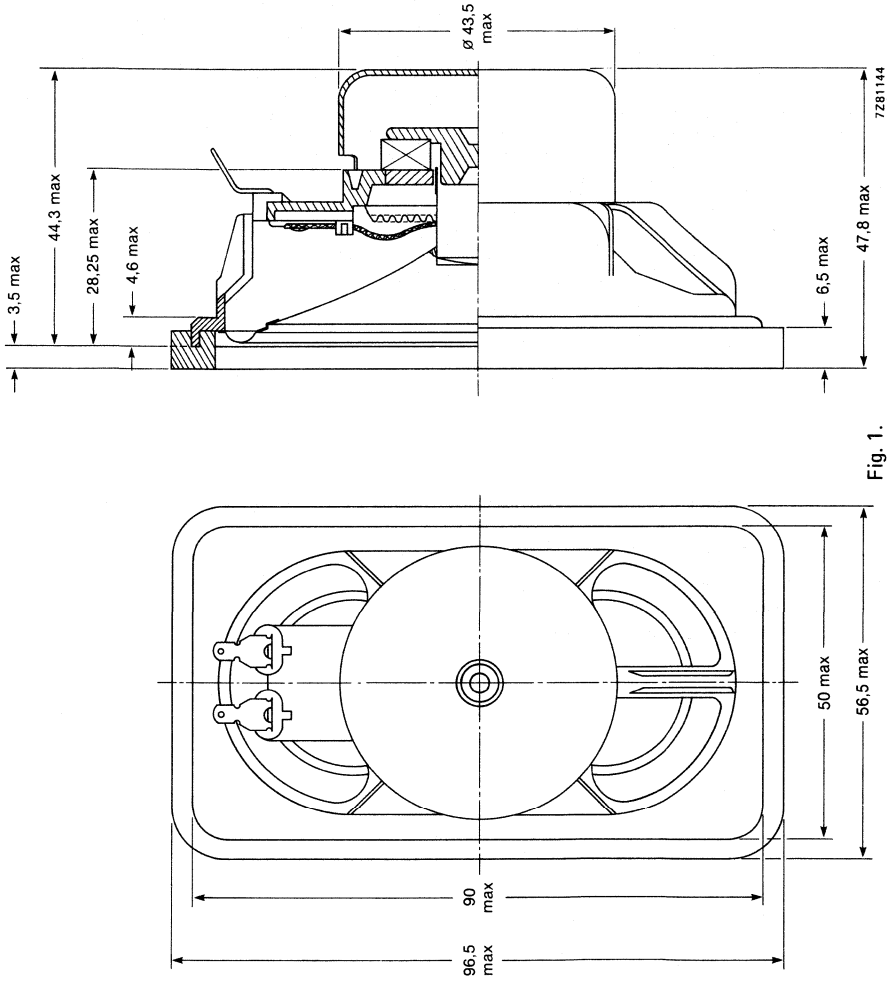


Fig. 1.

Recommended baffle opening (82 mm x 42 mm, with R=21 mm rounded ends) is required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

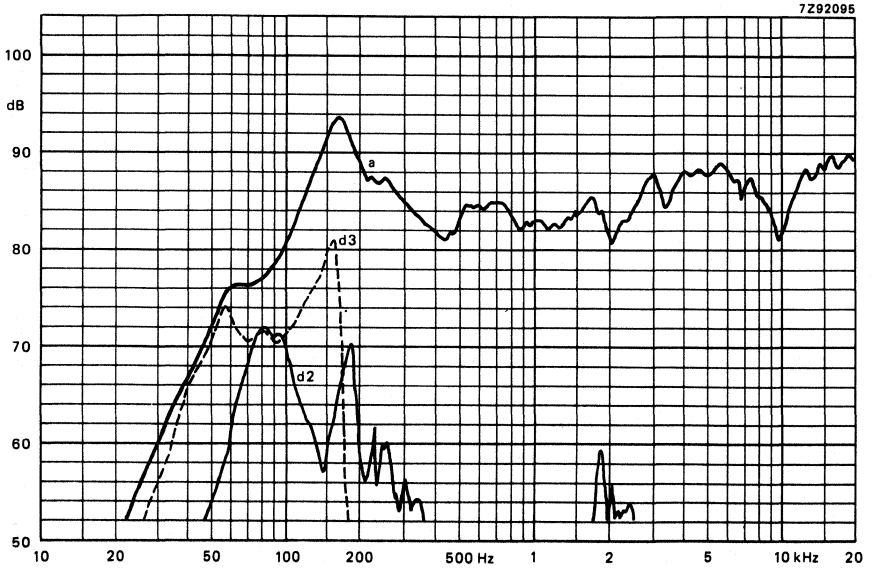


Fig. 2.

AVAILABLE VERSIONS

AD24370/X15S catalogue number 2422 257 24433 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

2 x 6 inch FULL RANGE LOUDSPEAKER

- frame: steel
- cone: paper, black dustcap
- surround: textile
- application: colour television
- gaskets: none
- recommended enclosure: open

TECHNICAL DATA

Rated impedance	25 Ω
Voice coil resistance	22 Ω
Rated frequency range	100 to 15 000 Hz
Sensitivity	80 dB
Resonance frequency	155 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5 W
Max. power on loudspeaker	10 W
Operating power (sound level 86,5 dB, 1 m)	5 W
Sweep voltage (80 to 1 000 Hz)	7,9 V
Filter	none
Energy in air gap	20,5 mJ
Flux density	0,75 T
Air-gap height	2,5 mm
Voice coil height	5,1 mm
Rated core diameter	14,5 mm
Magnet material	ceramic
diameter	36 mm
mass	0,029 kg
Mass of loudspeaker	0,160 kg
Magnetic stray field according to DIN 45578	max. 35 mT

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

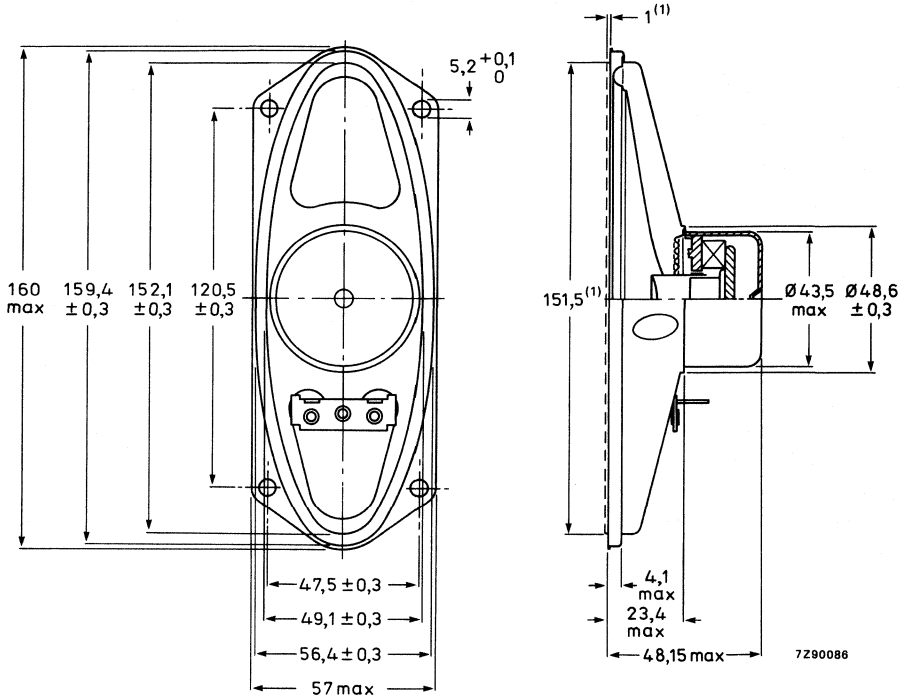


Fig. 1.

(1) Recommended baffle opening (ellipse, 48,5 x 151,5 mm) and mounting clearance (1 mm) are required for cone movement at the specified power handling capacity.
 One tag has a ⊕ mark to facilitate phase matching.

AVAILABLE VERSION

AD26313/X25 catalogue number 2422 257 29424 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

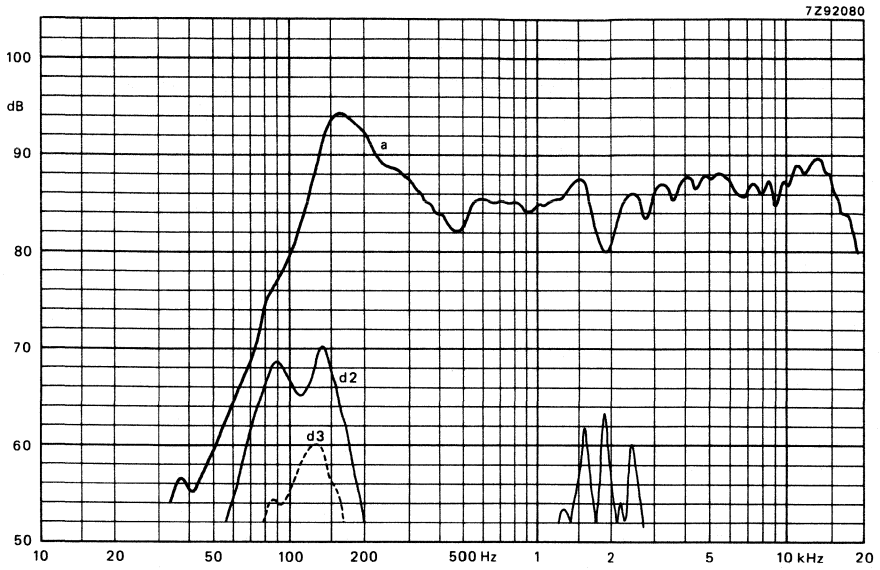


Fig. 2.

2 × 6 inch FULL RANGE LOUDSPEAKERS

APPLICATION

For television and other applications where a low magnetic stray field is essential.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,4	7	15	22 Ω
Resonance frequency		155		Hz
Power handling capacity, measured without filter, loudspeaker unmounted		5		W
Maximum power on loudspeaker		10		W
Operating power (sound level 90 dB, 1 m)	1,35	1,5	1,6	1,6 W
Sweep voltage (60 to 10 000 Hz)	3,2	4,5	6,1	7,9 V
Filter	none			
Characteristic sensitivity	89	88,5	88	88 dB/W/m
Energy in air gap		56		mJ
Flux density		1,25		T
Air-gap height		2,5		mm
Voice coil height	4,2	4,2	4,2	5,1 mm
Core diameter		14,5		mm
Magnet material		ceramic		
diameter		45		mm
mass		0,095		kg
Mass of loudspeaker		0,289		kg
Magnetic stray field according to DIN 45578	max.	35		mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a textile rim.

Dimensions in mm

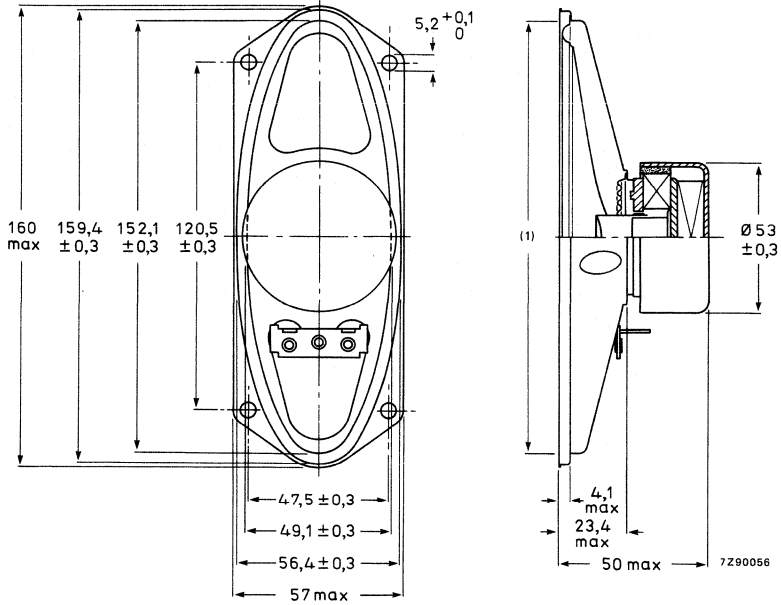


Fig. 1.

(1) Recommended baffle opening oval of 151,5 x 48,5 mm. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD26921/X4 catalogue number 2422 257 29331
- AD26921/X8 catalogue number 2422 257 29332
- AD26921/X15 catalogue number 2422 257 29333
- AD26921/X25 catalogue number 2422 257 29334

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

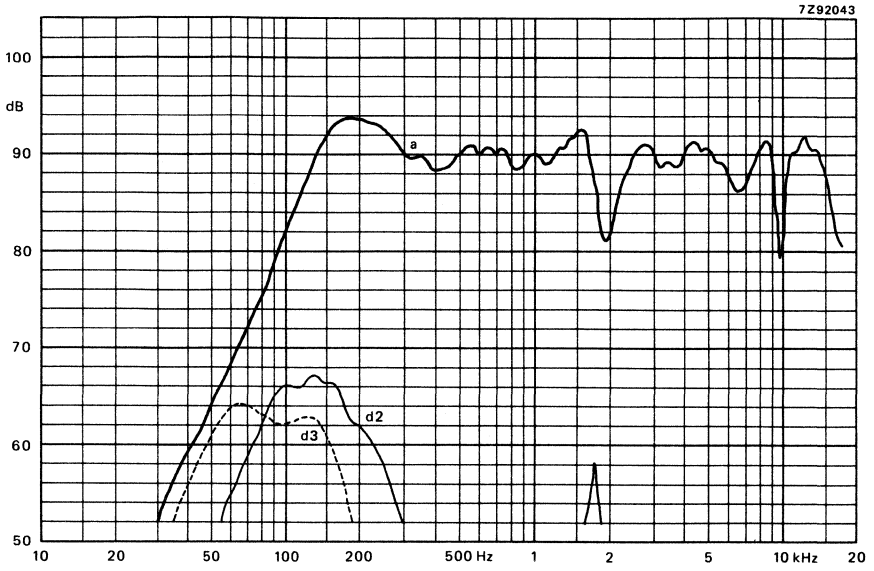


Fig. 2.

2 x 6 inch FULL RANGE LOUDSPEAKER

- frame: metal
- coil former: paper
- rim: textile
- application: colour television
- magnetic compensation: DIN 45578
- dustcap: black

TECHNICAL DATA

Rated impedance		25 Ω
Voice coil resistance		22 Ω
Rated frequency range		60 to 10 000 Hz
Characteristic sensitivity		845 dB/W/m
Resonance frequency		155 Hz
Power handling capacity, measured without filter, loudspeaker unmounted		5 W
Max. power on loudspeaker		10 W
Operating power (sound level 90 dB, 1 m)		3,5 W
Sweep voltage (60 to 1 000 Hz)		7,9 V
Filter	none	
Energy in air gap		34,5 mJ
Flux density		0,95 T
Air-gap height		2,5 mm
Air-gap length		2,5 mm
Voice coil height		5,1 mm
Rated core diameter		14,5 mm
Magnet material	ceramic	
diameter		36 mm
mass		0,082 kg
Mass of loudspeaker		0,289 kg
Magnetic stray field according to DIN 45578 at a distance of 7 cm	max.	0,35 mT

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

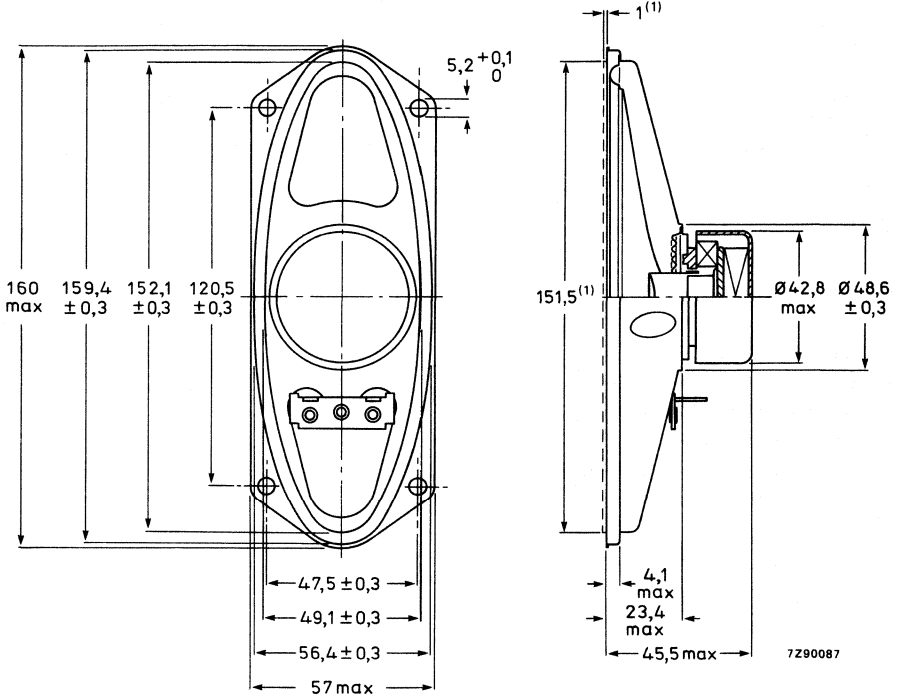


Fig. 1.

(1) Recommended baffle opening (48,5 x 151,5 mm oval) and mounting clearance (1 mm) are required for cone movement at the specified power handling capacity.
 One tag has a + mark to facilitate phase matching.

AVAILABLE VERSIONS

AD26951/X25 catalogue number 2422 257 29329 This number is for balk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

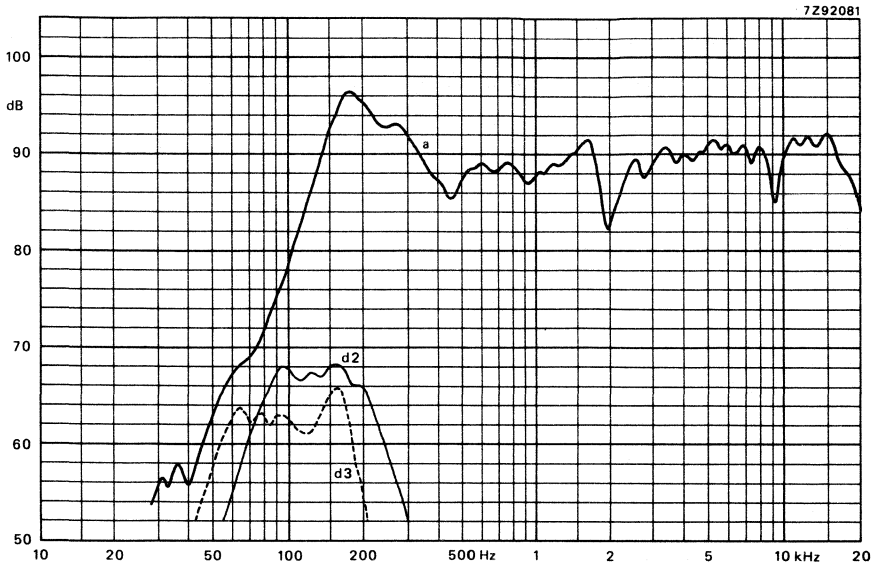


Fig. 2.

3 inch SQUAWKER LOUDSPEAKER

- frame: plastic, black
- cone: paper
- surround: paper

TECHNICAL DATA

	version	
	4	8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7,0 Ω
Rated frequency range	1800 to 10 000 Hz	
Resonance frequency	950	Hz
Power handling capacity, measured with filter, 1 min. on/ 1 min. off	5	W
Filter, in series	6,8	μ F
Max. power on loudspeaker	10	W
Operating power (sound level 96 dB, 1 m)	4	W
Sweep voltage (500 to 10 000 Hz)	2,5	3,5 V
Characteristic sensitivity	91	dB
Energy in air gap	21,5	mJ
Flux density	1,1	T
Air-gap height	2,5	mm
Voice coil height	4,2	mm
Rated core diameter	14,5	mm
Magnet material	ceramic	
diameter	36	mm
mass	0,029	kg
Mass of loudspeaker	0,11	kg

Connection is by 2,8 mm x 0,8 mm tag connectors or by soldering.

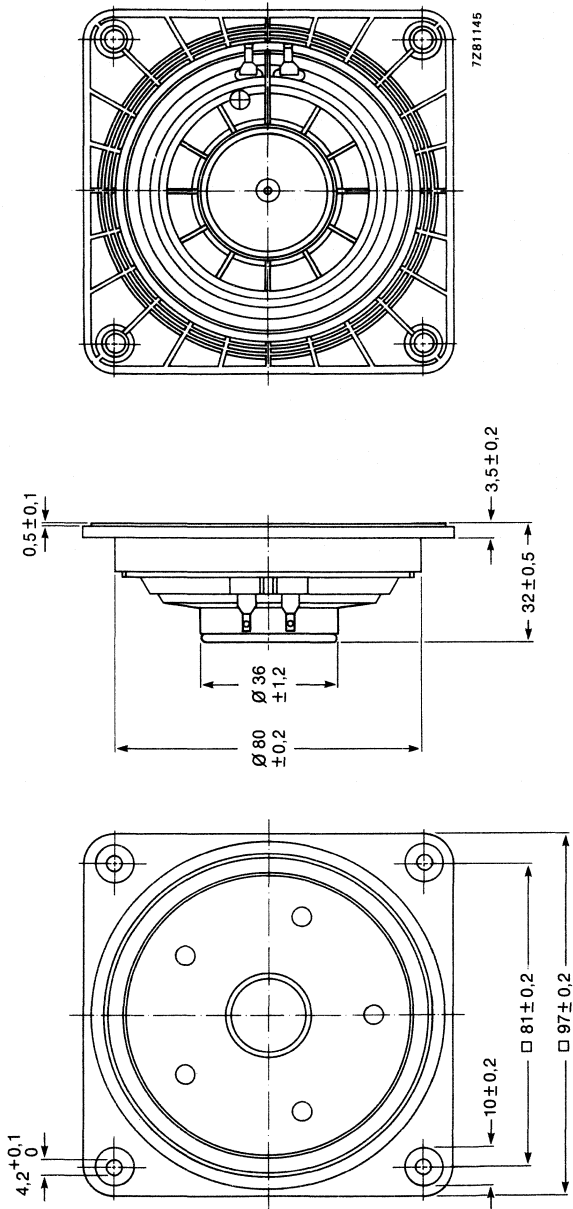


Fig. 1.

One tag has a + mark to facilitate phase matching.

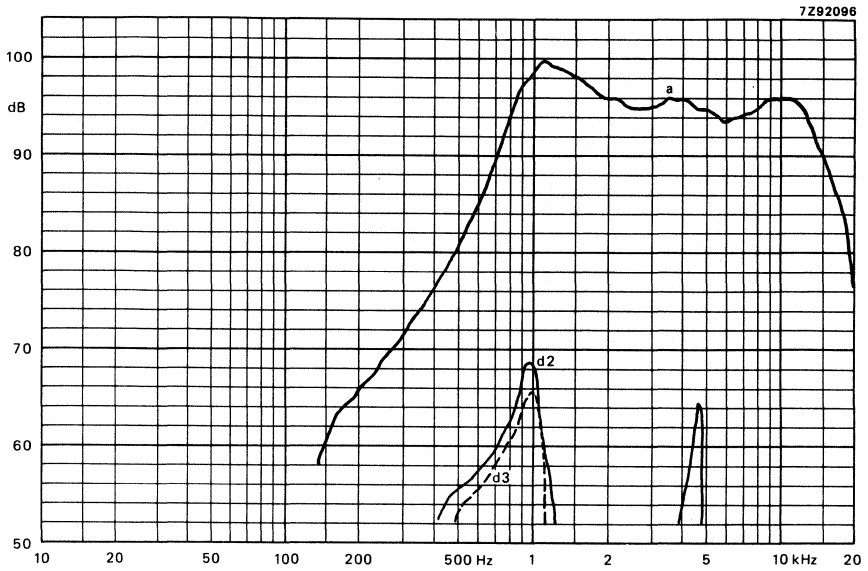


Fig. 2.

AVAILABLE VERSIONS

AD33303/Sq4	catalogue number 2422 257 53131		These numbers are for bulk-packed
AD33303/Sq8	catalogue number 2422 257 53132		loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

3 inch SQUAWKER LOUDSPEAKER

- frame: plastic, black
- cone: paper
- surround: paper

TECHNICAL DATA

	versions	
	Sq4	Sq8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7 Ω
Rated frequency range		Hz
Resonance frequency	950	Hz
Cross-over frequency (dB/octave slope)		
Power handling capacity, measured with filter 1 min. on/ 2 min. off		W
Filter, in series	6,8	μ F
Max. power on loudspeaker	10	W
Operating power (sound level 96 dB, 1 m)	2	W
Sweep voltage (500 to 10 000 Hz)	2	2,5 V
Characteristic sensitivity	93	dB
Energy in air gap	40	mJ
Flux density	1,1	T
Air-gap height	2,5	mm
Voice coil height	4,2	mm
Rated core diameter	14,5	mm
Magnet material	ceramic	
diameter	45	mm
mass	0,053	kg
Mass of loudspeaker	0,15	kg

Connection is by 2,8 mm x 0,8 mm tag connectors or by soldering.

Dimensions in mm

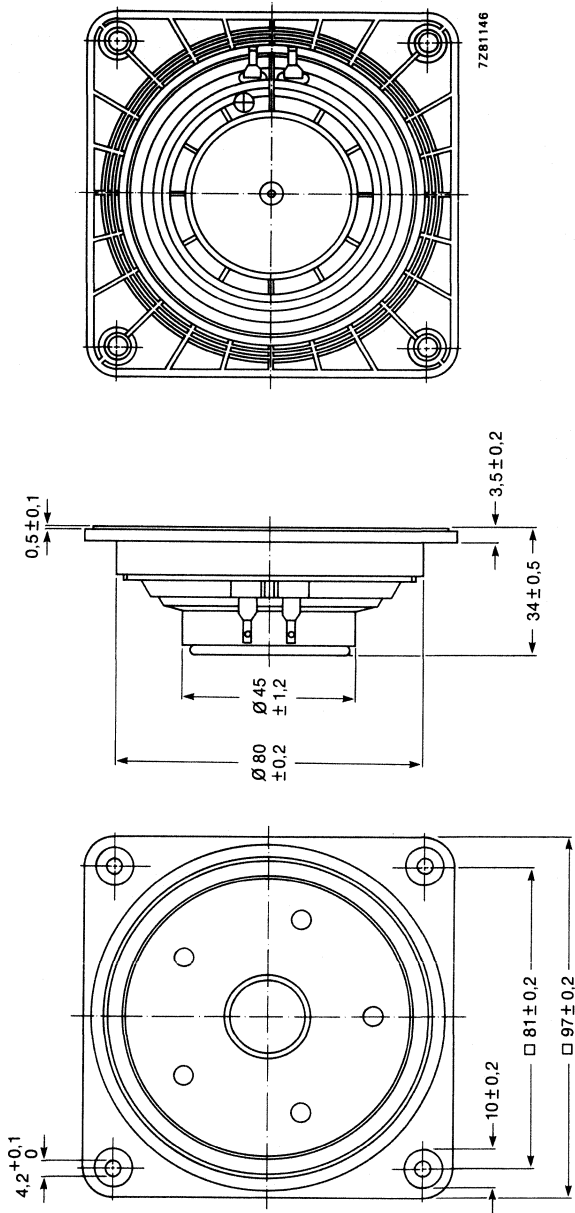


Fig. 1.

One tag has a + mark to facilitate phase matching.

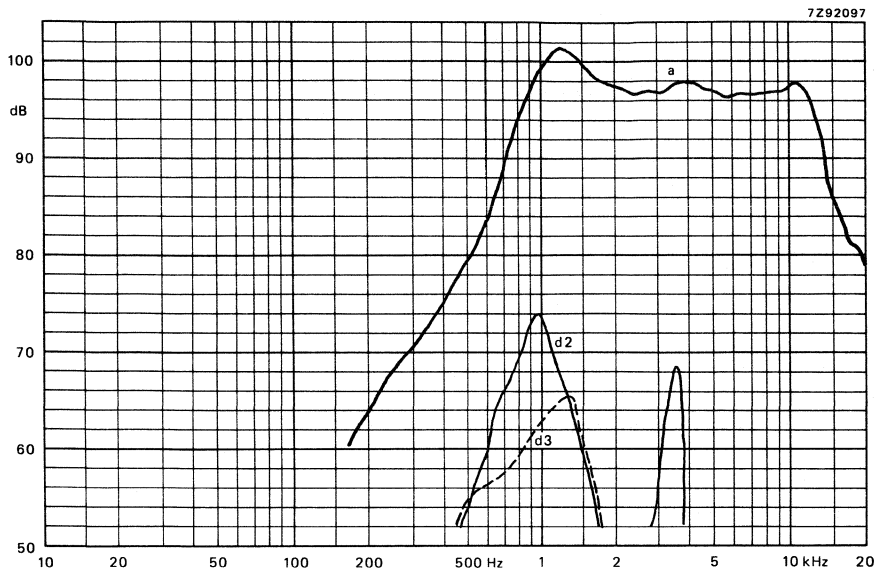


Fig. 2.

AVAILABLE VERSIONS

AD33851/Sq4 catalogue number 2422 257 53135 | These numbers are for bulk-packed
AD33851/Sq8 catalogue number 2422 257 53136 | loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

3 inch FULL RANGE LOUDSPEAKER

APPLICATION

For hi-fi video applications.

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	200 to 20 000 Hz
Resonance frequency	85 Hz
Power handling capacity, measured without filter; loudspeaker mounted in 1 litre enclosure	12 W
loudspeaker unmounted	6 W
Maximum power on loudspeaker	20 W
Operating power (sound level 90 dB, 1 m)	2,25 W
Sweep voltage (45 to 20 000 Hz)	9 W
Energy in air gap	60,5 mJ
Flux density	1 T
Air-gap height	3 mm
Voice coil height	4,4 mm
Core diameter	18 mm
Magnet material	ceramic
diameter	45 mm
mass	53 g
Mass of loudspeaker	0,3 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

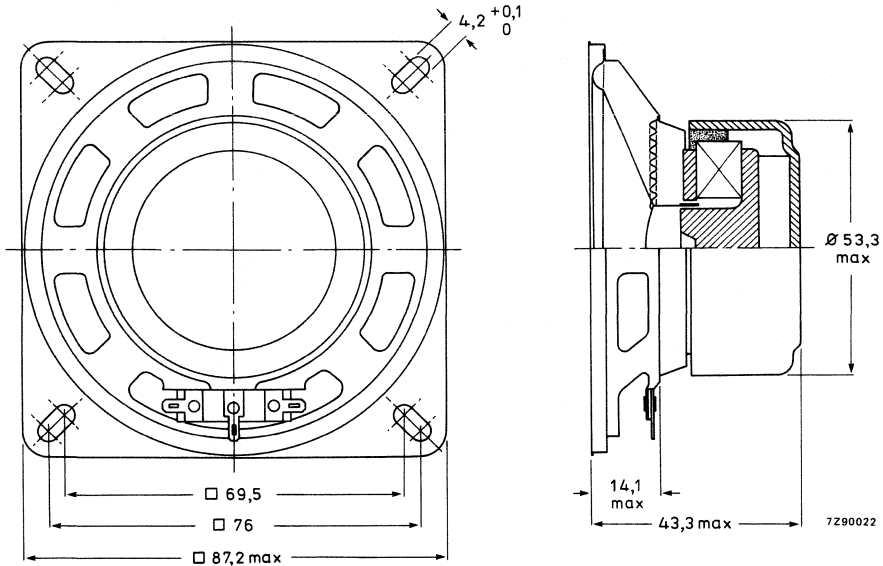


Fig. 1.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: ϕ 79 mm.

AVAILABLE VERSION

AD33910/X4 catalogue number 2422 257 34532. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

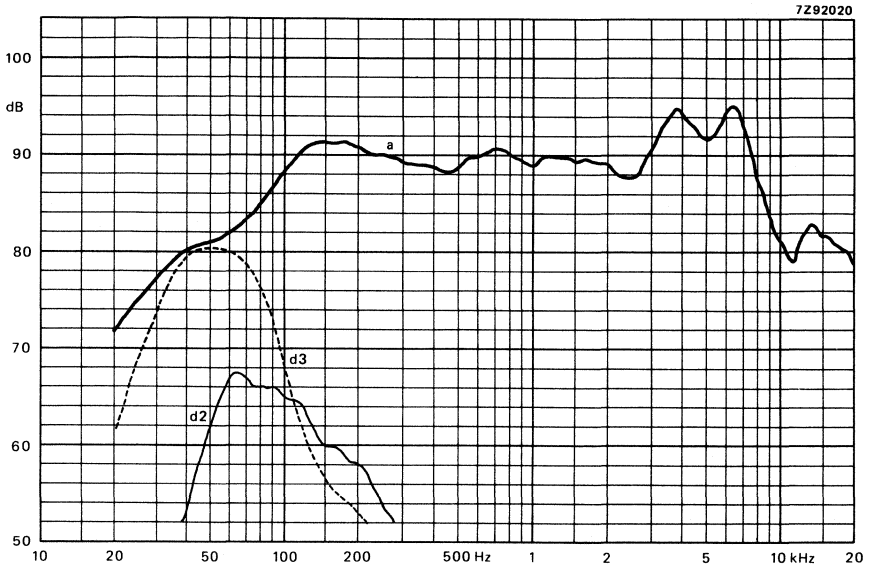


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	75 to 16 000			Hz
Resonance frequency	160			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	3			W
Maximum power on loudspeaker	5			W
Operating power (sound level 90 dB, 0,5 m)	650			mW
Sweep voltage (100 to 20 000 Hz)	to be established			V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	3,6			mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	0,018			kg
Mass of loudspeaker	0,09			kg

The loudspeakers have a plastic frame and a paper cone. AD35740/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request. ←

**AD35720/X.
AD35740/X.**

Dimensions in mm

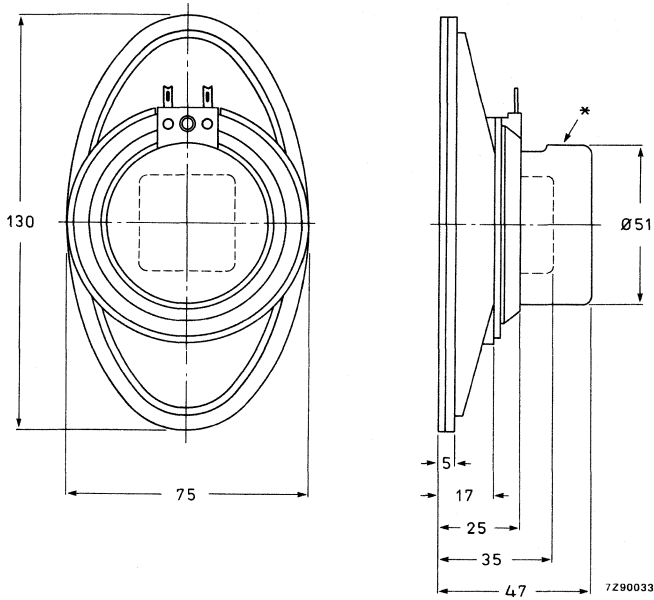


Fig. 1.

* Screening for AD35740/X only.

One tag has a ⊕ mark to facilitate phase matching. Recommended baffle hole: ellipse, 63 x 118 mm.

AVAILABLE VERSIONS

- AD35720/X4 catalogue number 2403 257 20021
- AD35720/X8 catalogue number 2403 257 20022
- AD35720/X15 catalogue number 2403 257 20023
- AD35720/X25 catalogue number 2403 257 20024
- AD35740/X4 catalogue number 2403 257 20121
- AD35740/X8 catalogue number 2403 257 20122
- AD35740/X15 catalogue number 2403 257 20123
- AD35740/X25 catalogue number 2403 257 20124

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

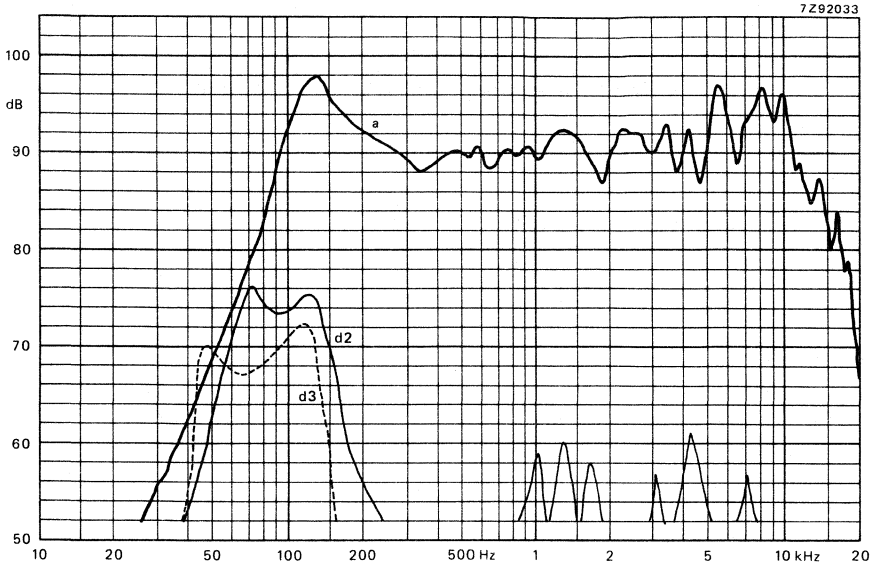


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range		75 to 16 000		Hz
Resonance frequency		160		Hz
Power handling capacity, measured without filter, loudspeaker unmounted		2,5		W
Maximum power on loudspeaker		5		W
Operating power (sound level 90 dB, 0,5 m)		650		mW
Sweep voltage (100 to 20 000 Hz)		t.b.a.		V
Filter		none		
Energy in air gap		12,7		mJ
Flux density		0,74		T
Air-gap height		2,5		mm
Voice coil height		3,6		mm
Core diameter		10		mm
Magnet material		ceramic		
square		28,5		mm
mass		0,018		kg
Mass of loudspeaker		0,09		kg

The loudspeakers have a plastic frame and a paper cone. AD35741/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

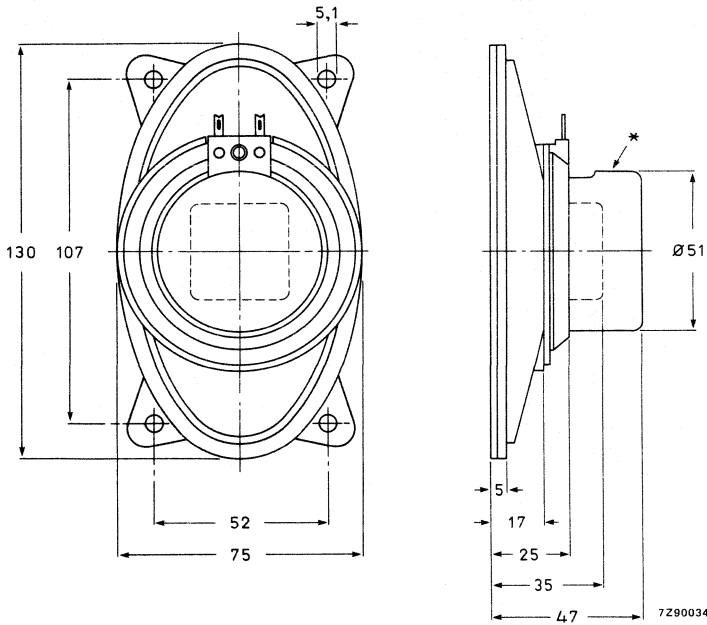


Fig. 1.

* Screening for AD35741 only.

One tag has a \oplus mark to facilitate phase matching. Recommended baffle hole: oval, 63 x 118 mm.

AVAILABLE VERSIONS

- AD35721/X4 catalogue number 2403 257 20221
- AD35721/X8 catalogue number 2403 257 20222
- AD35721/X15 catalogue number 2403 257 20223
- AD35721/X25 catalogue number 2403 257 20224
- AD35741/X4 catalogue number 2403 257 20321
- AD35741/X8 catalogue number 2403 257 20322
- AD35741/X15 catalogue number 2403 257 20323
- AD35741/X25 catalogue number 2403 257 20324

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

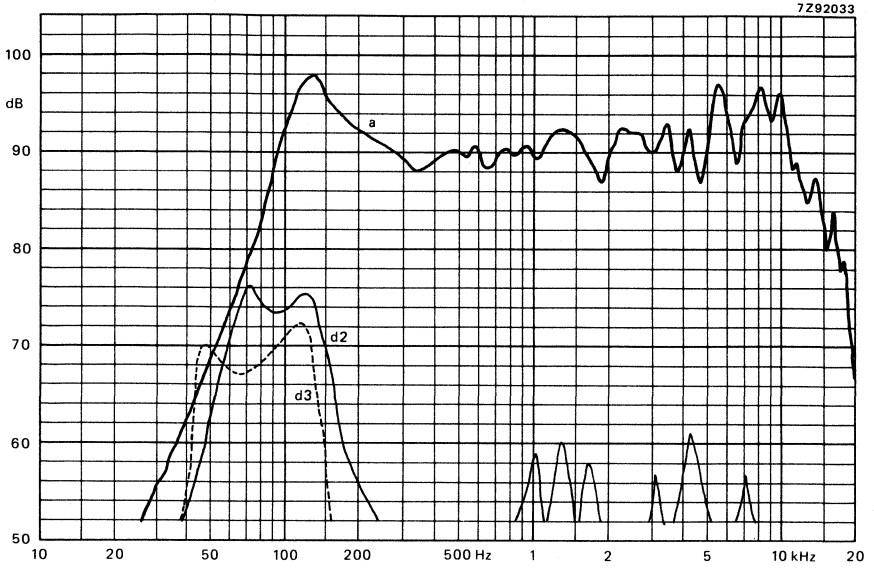


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD35742 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	100 to 20 000			Hz
Resonance frequency	160			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	3			W
Operating power (sound level 90 dB, 0,5 m)	650			mW
Sweep voltage (100 to 20 000 Hz)	to be established			V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	3,6			mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	0,018			kg
Mass of loudspeaker	0,091			kg

Magnetic stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request. ←

**AD35722/X.
AD35742/X.**

Dimensions in mm

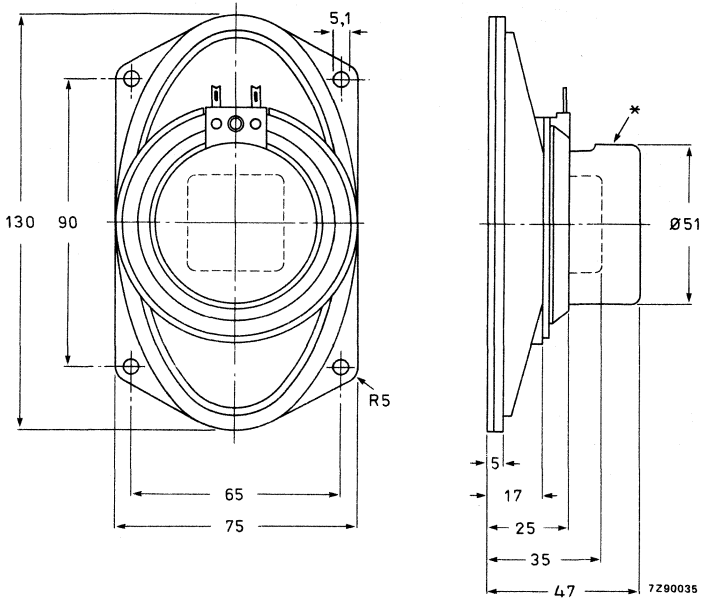


Fig. 1.

* Screening for AD35742/X only.

One tag has a \oplus mark to facilitate phase mounting. Recommended baffle hole: ellipse, 63 x 118 mm.

AVAILABLE VERSIONS

- | | | |
|-------------|---------------------------------|---|
| AD35722/X4 | catalogue number 2403 257 20421 | } These numbers are for bulk-packed loudspeakers. |
| AD35722/X8 | catalogue number 2403 257 20422 | |
| AD35722/X15 | catalogue number 2403 257 20423 | |
| AD35722/X25 | catalogue number 2403 257 20424 | |
| AD35742/X4 | catalogue number 2403 257 20521 | |
| AD35742/X8 | catalogue number 2403 257 20522 | |
| AD35742/X15 | catalogue number 2403 257 20523 | |
| AD35742/X25 | catalogue number 2403 257 20524 | |

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92033

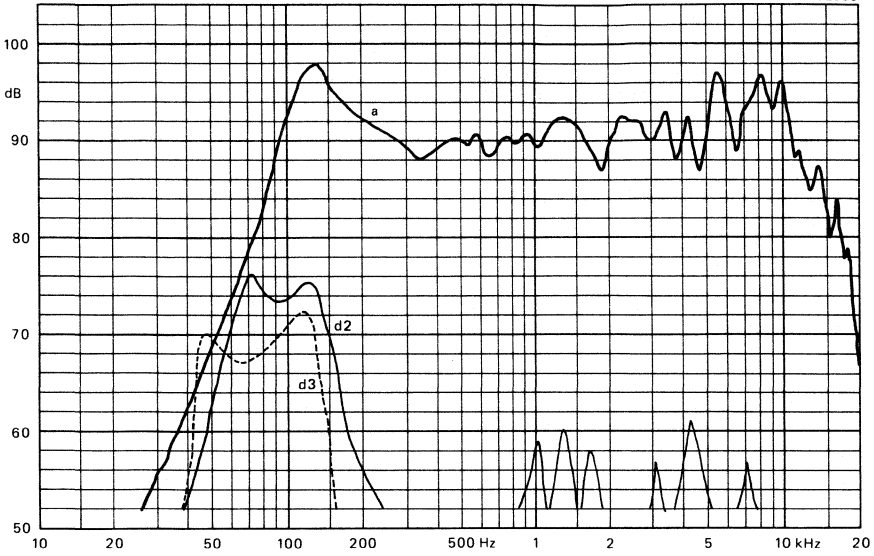


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD35746 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	75 to 16 000				Hz
Resonance frequency	160				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	650				mW
Sweep voltage (100 to 20 000 Hz)	to be established				V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	3,6				mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD35725	70				g
AD35746	90				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeakers have a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

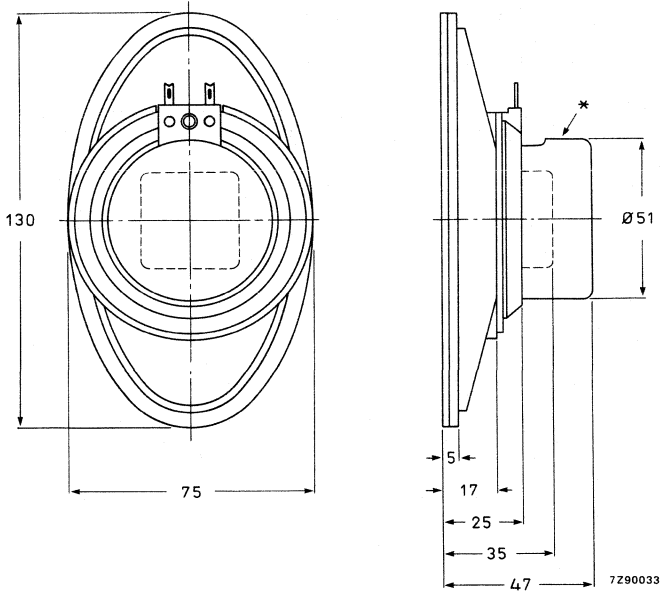


Fig. 1.

* Screening for AD35746 only.

One tag has a ⊕ mark to facilitate phase matching. Recommended baffle hole: ellipse, 63 x 118 mm.

AVAILABLE VERSIONS

AD35725/X4	catalogue number 2403 257 50021
AD35725/X8	catalogue number 2403 257 50022
AD35725/X15	catalogue number 2403 257 50023
AD35725/X25	catalogue number 2403 257 50024
AD35746/X4	catalogue number 2403 257 50121
AD35746/X8	catalogue number 2403 257 50122
AD35746/X15	catalogue number 2403 257 50123
AD35746/X25	catalogue number 2403 257 50124

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

AD35725/X.
AD35746/X.

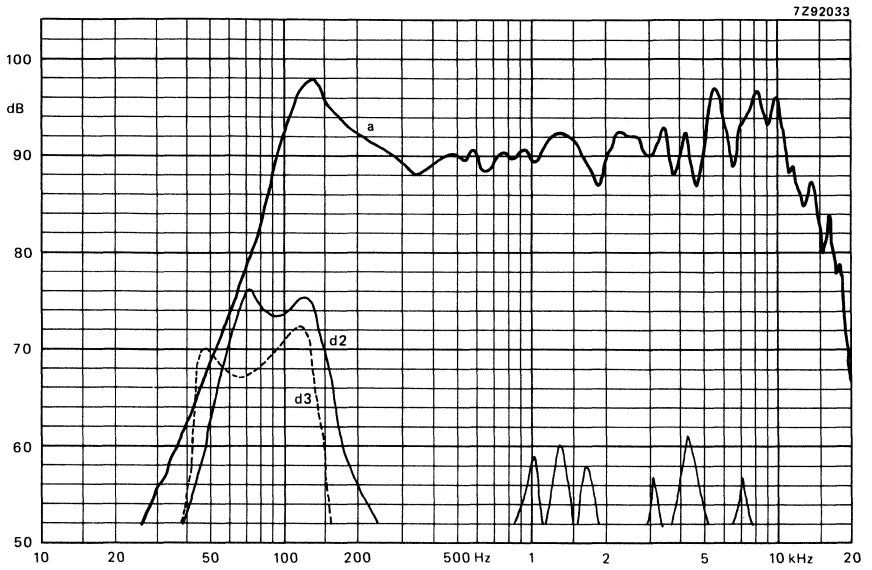


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD35747 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	75 to 16 000				Hz
Resonance frequency	160				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	650				mW
Sweep voltage (100 to 20 000 Hz)	t.b.a.				V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	3,6				mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD35726	70				g
AD35747	90				g

The loudspeakers have a plastic frame and a paper cone.

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request.



AD35726/X.
AD35747/X.

Dimensions in mm

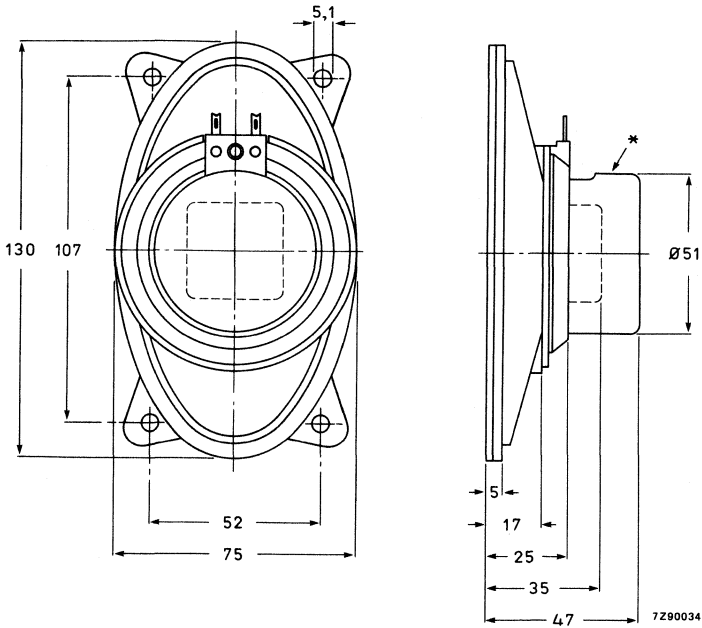


Fig. 1.

* Screening for AD35747 only.

One tag has a ⊕ mark to facilitate phase matching. Recommended baffle hole: oval, 63 x 118 mm.

AVAILABLE VERSIONS

AD35726/X4	catalogue number 2403 257 50221
AD35726/X8	catalogue number 2403 257 50222
AD35726/X15	catalogue number 2403 257 50223
AD35726/X25	catalogue number 2403 257 50224
AD35747/X4	catalogue number 2403 257 50321
AD35747/X8	catalogue number 2403 257 50322
AD35747/X15	catalogue number 2403 257 50323
AD35747/X25	catalogue number 2403 257 50324

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

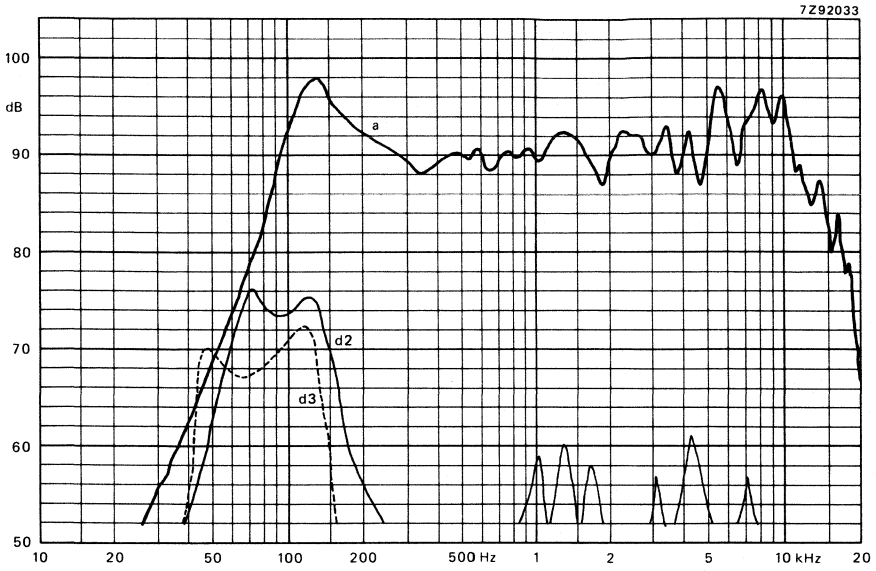


Fig. 2.

3 x 5 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD35748 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	100 to 20 000				Hz
Resonance frequency	160				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	650				mW
Sweep voltage (100 to 20 000 Hz)	to be established				V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	3,6				mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD35727	70				g
AD35748	90				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeakers have a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

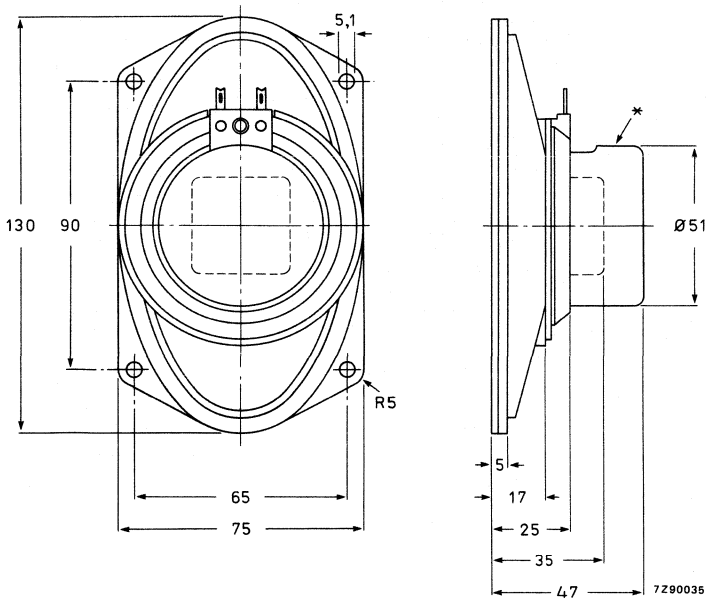


Fig. 1.

* Screening for AD35748 only.

One tag has a \oplus mark to facilitate phase mounting. Recommended baffle hole: ellipse, 63 x 118 mm.

AVAILABLE VERSIONS

AD35727/X4	catalogue number 2403 257 50421
AD35727/X8	catalogue number 2403 257 50422
AD35727/X15	catalogue number 2403 257 50423
AD35727/X25	catalogue number 2403 257 50424
AD35748/X4	catalogue number 2403 257 50521
AD35748/X8	catalogue number 2403 257 50522
AD35748/X15	catalogue number 2403 257 50523
AD35748/X25	catalogue number 2403 257 50524

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2).

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

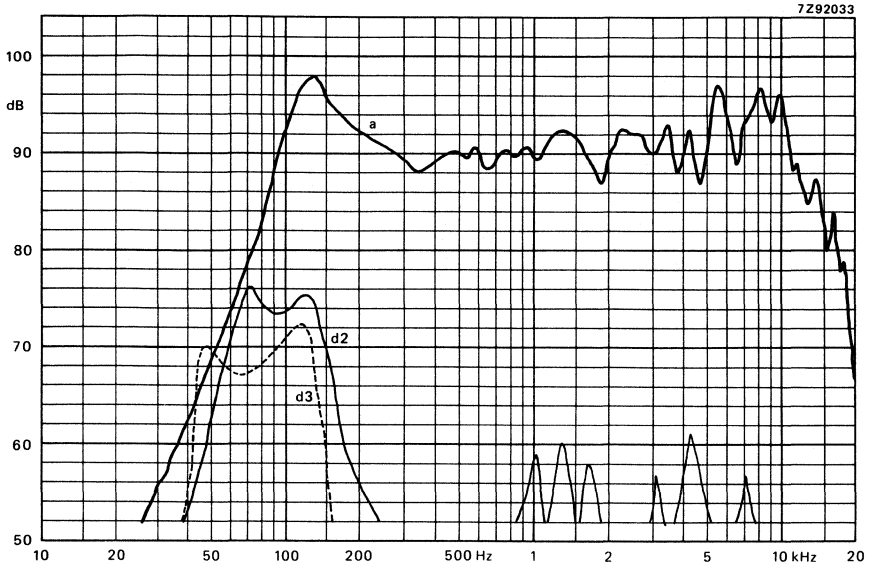


Fig. 2.

3 x 6 inch OVAL WOOFER LOUDSPEAKER

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	60 to 13000 Hz
Resonance frequency	68 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	15 W
Max. power on loudspeaker	33 W
Operating power (sound level 90 dB, 1 m)	7,5 W
Sweep voltage (40 to 1000 Hz)	5 V
Filter	none
Energy in air gap	97,5 mJ
Flux density	1,24 T
Air-gap height	3 mm
Voice coil height	6,5 mm
Core diameter	18 mm
Magnet material	ceramic
diameter	60 mm
mass	0,190 kg
Mass of loudspeaker	0,475 kg
Magnetic stray field according to DIN 45578, max.	35 mT

Connection by 2,8 mm (0,11 inch) tag connectors or by soldering.
The loudspeaker has a paper cone, an aluminium coil-former and a textile surround.

Dimensions in mm

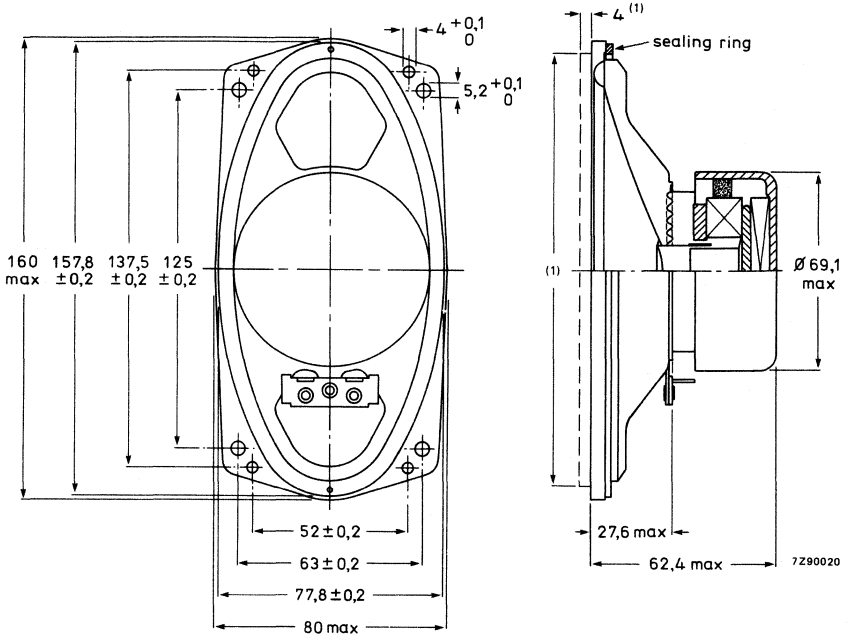


Fig. 1.

(1) Recommended baffle hole (oval, 151 mm x 71 mm) and clearance depth (4 mm) are required for cone movement at the specified power handling capacity.

AVAILABLE VERSION

AD36510/W4 catalogue number 2422 257 29021

This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92017

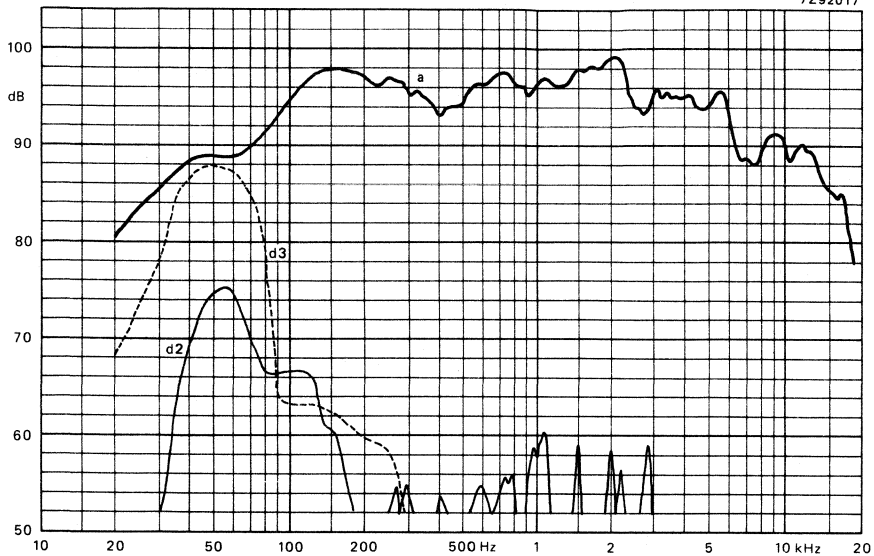


Fig. 2.

3 x 6 inch FULL RANGE LOUDSPEAKERS

- for audio and video, 3 W
- plastic frame, oval, for clip mounting
- paper cone

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Sensitivity		69		dB
Resonance frequency		130		Hz
Power handling capacity				
AD36720		3		W
AD36740		2,5		W
Maximum power on loudspeaker		6		W
Operating power (sound level 90 dB, 0,5 m)		450		mW
Sweep voltage (100 to 20 000 Hz)				
AD36720		2,4		V
AD36740		2,2		V
Filter		none		
Energy in air gap		12,7		mJ
Flux density		0,74		T
Air-gap height		2,5		mm
Voice coil height		4		mm
Core diameter		10		mm
Magnet material		ceramic		
square		23		mm
mass		0,018		kg
Mass of loudspeaker				
AD36720		83		g
AD36740		104		g

AD36740/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

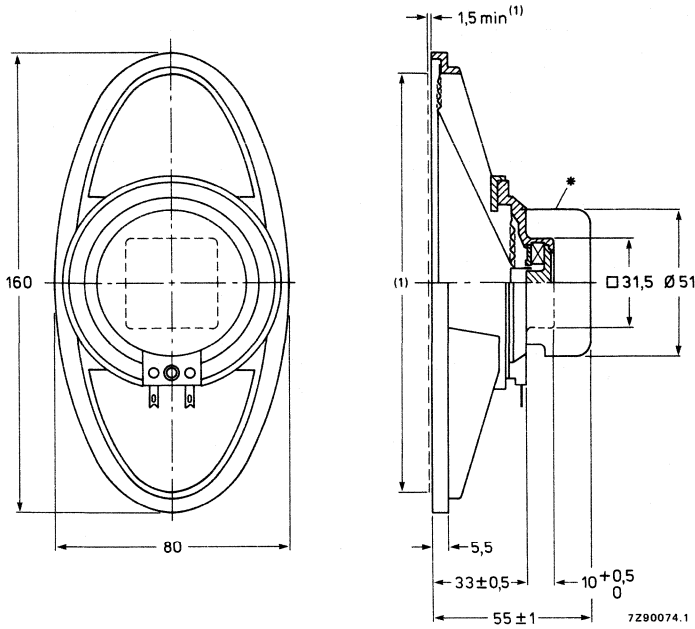


Fig. 1.

* Screening for AD36740/X only.

(1) Recommended baffle hole (ellipse, 66 x 146 mm) and mounting clearance (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD36720/X4 catalogue number 2403 257 26021
- AD36720/X8 catalogue number 2403 257 26022
- AD36720/X15 catalogue number 2403 257 26023
- AD36720/X25 catalogue number 2403 257 26024

- AD36740/X4 catalogue number 2403 257 26121
- AD36740/X8 catalogue number 2403 257 26122
- AD36740/X15 catalogue number 2403 257 26123
- AD36740/X25 catalogue number 2403 257 26124

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Crue a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

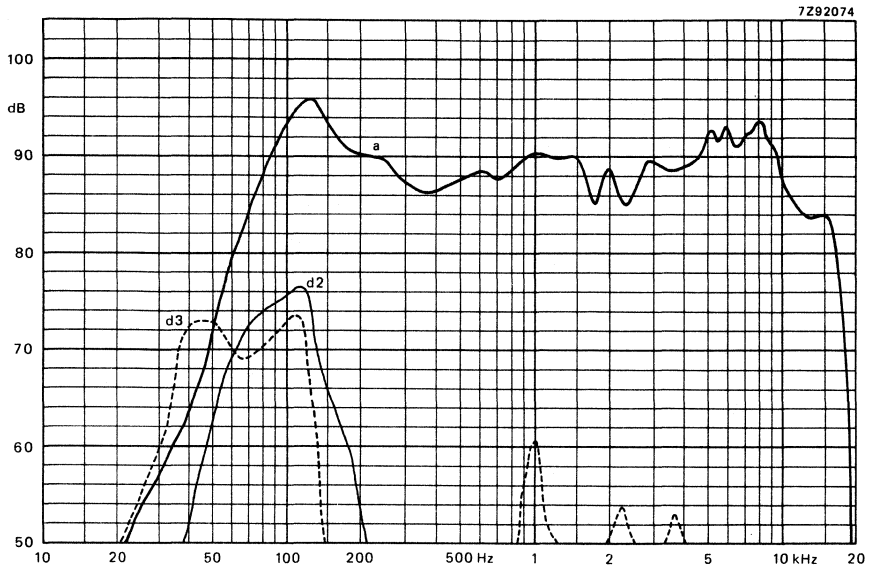


Fig. 2.

3 x 6 inch FULL RANGE LOUDSPEAKERS

- for audio and video
- plastic frame, semi rectangular, 4 hole mounting
- paper cone

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Sensitivity		69		dB
Resonance frequency		130		Hz
Power handling capacity				
AD36722		3		W
AD36742		2,5		W
Maximum power on loudspeaker		6		W
Operating power (sound level 90 dB, 0,5 m)		450		mW
Sweep voltage (100 to 20 000 Hz)				
AD36722		2,4		V
AD36742		2,2		V
Filter		none		
Energy in air gap		12,7		mJ
Flux density		0,74		T
Air-gap height		2,5		mm
Voice coil height		4		mm
Core diameter		10		mm
Magnet material		ceramic		
square		23		mm
mass		0,018		kg
Mass of loudspeaker				
AD36722		83		g
AD36742		104		g

AD36742/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request.



AD36722/X.
AD36742/X.

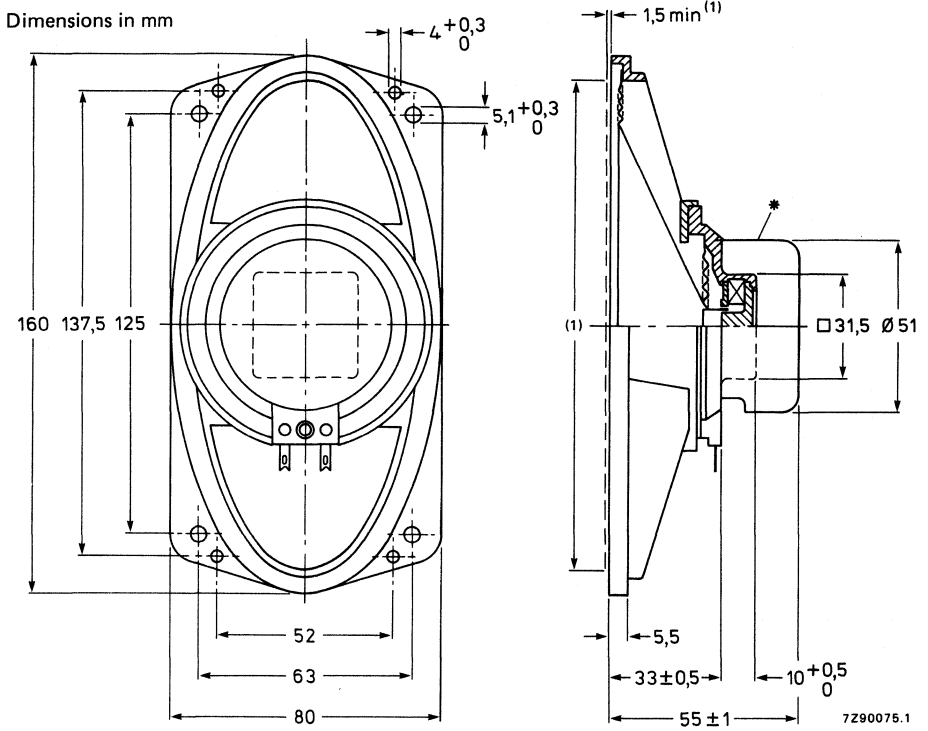


Fig. 1.

* Screening for AD36742/X only.

(1) Recommended baffle hole (ellipse, 66 x 146 mm) and mounting clearance (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD36722/X4 catalogue number 2403 257 26421
- AD36722/X8 catalogue number 2403 257 26422
- AD36722/X15 catalogue number 2403 257 26423
- AD36722/X25 catalogue number 2403 257 26424
- AD36742/X4 catalogue number 2403 257 26521
- AD36742/X8 catalogue number 2403 257 26522
- AD36742/X15 catalogue number 2403 257 26523
- AD36742/X25 catalogue number 2403 257 26524

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92074

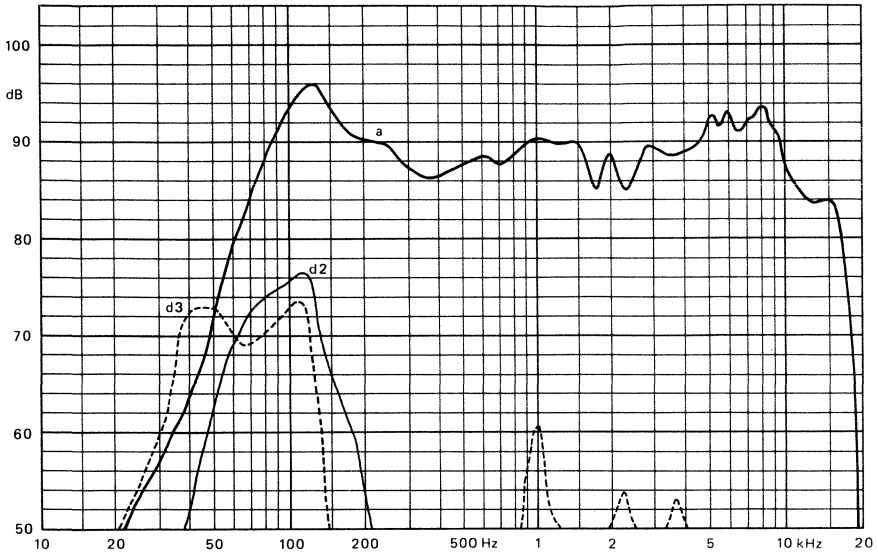


Fig. 2.

AD36725/X.
AD36746/X.

3 × 6 inch FULL RANGE LOUDSPEAKERS

- for audio and video, 5 W
- plastic frame, oval for clip mounting
- paper cone

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Sensitivity			69	dB
Resonance frequency			130	Hz
Power handling capacity, AD36725			5	W
AD36746			4,5	W
Maximum power on loudspeaker			7	W
Operating power (sound level 90 dB, 0,5 m)			450	mW
Sweep voltage (100 to 20 000 Hz)				
AD36725			3,16	V
AD36746			2,64	V
Filter			none	
Energy in air gap			12,7	mJ
Flux density			0,74	T
Air-gap height			2,5	mm
Voice coil height			4	mm
Core diameter			10	mm
Magnet material			ceramic	
square			23	mm
mass			0,018	kg
Mass of loudspeaker				
AD36725			83	g
AD36746			104	g

AD36746/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

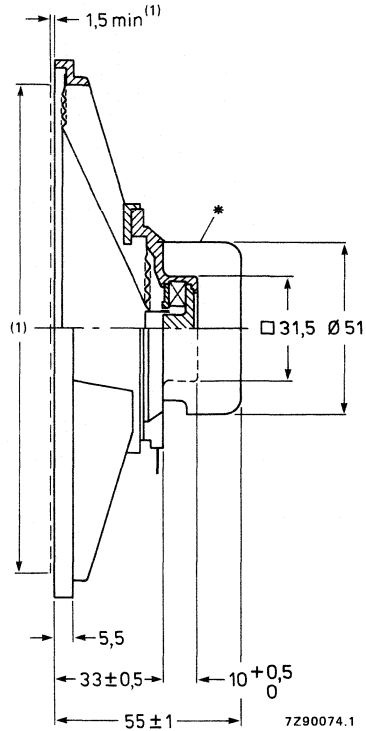
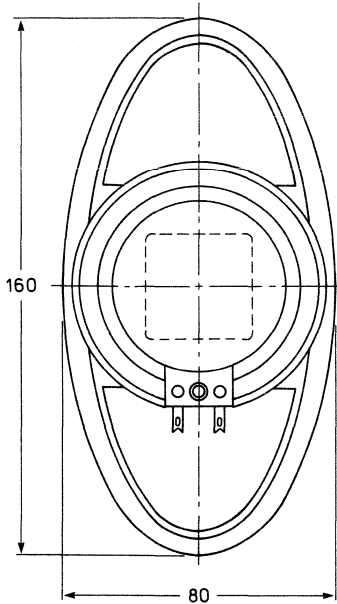


Fig. 1.

* Screening for AD36746/X only.

(1) Recommended baffle hole (ellipse, 66 x 146 mm) and mounting clearance (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD36725/X4 catalogue number 2403 257 56021
- AD36725/X8 catalogue number 2403 257 56022
- AD36725/X15 catalogue number 2403 257 56023
- AD36725/X25 catalogue number 2403 257 56024
- AD36746/X4 catalogue number 2403 257 56121
- AD36746/X8 catalogue number 2403 257 56122
- AD36746/X15 catalogue number 2403 257 56123
- AD36746/X25 catalogue number 2403 257 56124

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

AD36725/X.
AD36746/X.

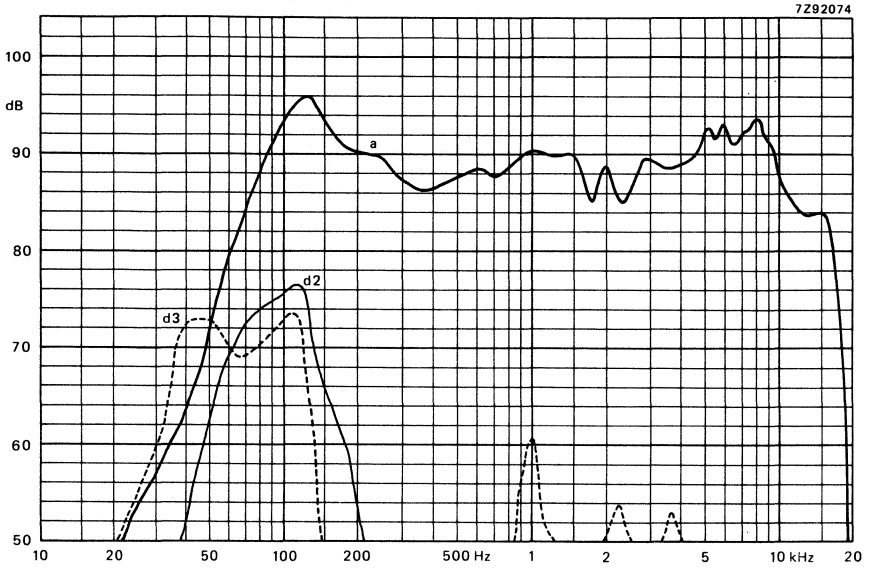


Fig. 2.

3 x 6 inch FULL RANGE LOUDSPEAKERS

- for audio and video, 5 W
- plastic frame, semi rectangular, 4 hole mounting
- paper cone

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Sensitivity		69		dB
Resonance frequency		130		Hz
Power handling capacity, AD36727		5		W
AD36748		4,5		W
Maximum power on loudspeaker		7		W
Operating power (sound level 90 dB, 0,5 m)		450		mW
Sweep voltage (100 to 20 000 Hz) AD36727		3,16		V
AD36748		2,64		V
Filter		none		
Energy in air gap		12,7		mJ
Flux density		0,74		T
Air-gap height		2,5		mm
Voice coil height		4		mm
Core diameter		10		mm
Magnet material		ceramic		
square		23		mm
mass		0,018		kg
Mass of loudspeaker				
AD36727		83		g
AD36748		104		g

AD36748/X. have a screened magnet system; stray field according to DIN 45578. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request.



AD36727/X.
AD36748/X.

Dimensions in mm

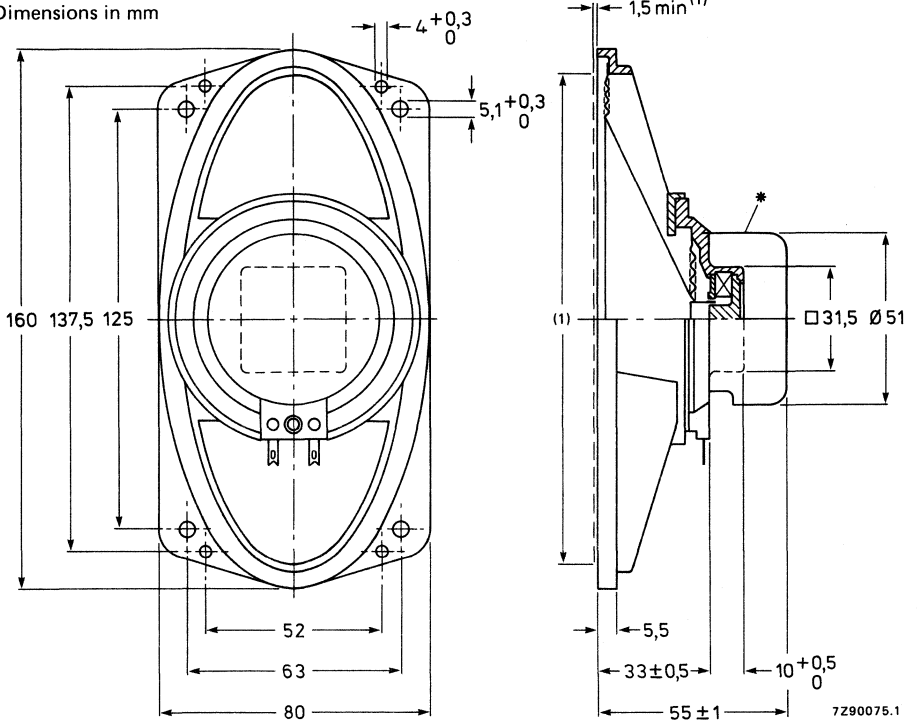


Fig. 1.

* Screening for AD36748/X only.

(1) Recommended baffle hole (ellipse, 66 x 146 mm) and mounting clearance (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD36727/X4 catalogue number 2403 257 56421
- AD36727/X8 catalogue number 2403 257 56422
- AD36727/X15 catalogue number 2403 257 56423
- AD36727/X25 catalogue number 2403 257 56424
- AD36748/X4 catalogue number 2403 257 56521
- AD36748/X8 catalogue number 2403 257 56522
- AD36748/X15 catalogue number 2403 257 56523
- AD36748/X25 catalogue number 2403 257 56524

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92074

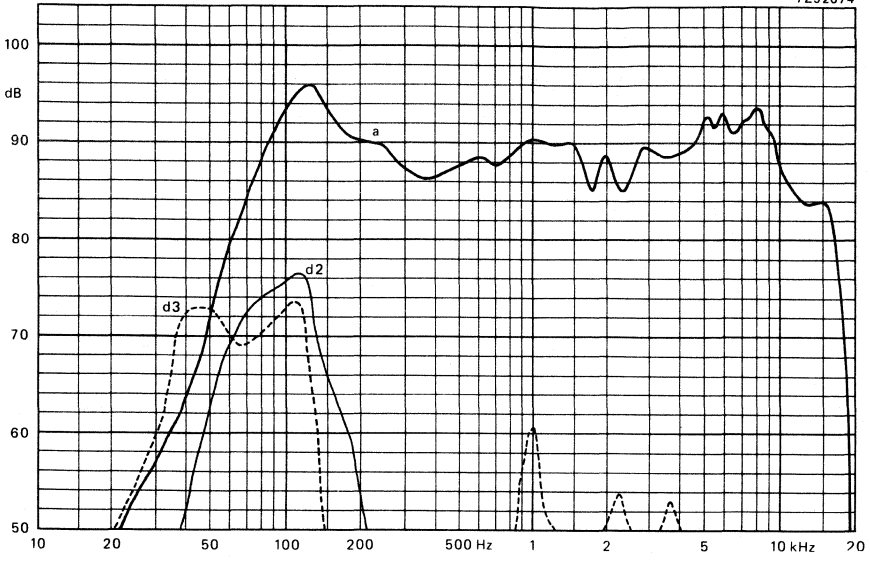


Fig. 2.

3 x 6 inch OVAL WOOFER LOUDSPEAKER

APPLICATION

For hi-fi video in open applications.

TECHNICAL DATA

	version		
	P4	P8	P15
Rated impedance	4	8	15 Ω
Voice coil resistance	3,4	7	13,2 Ω
Rated frequency range		65 to 18 000	Hz
Resonance frequency		95	Hz
Power handling capacity, measured without filter, loudspeaker unmounted		8	W
Maximum power on loudspeaker		15	W
Operating power (sound level 90 dB, 1 m)	1,6	1,6	1,7 W
Sweep voltage (50 to 1000 Hz)	4	5,6	7,75 V
Filter		none	
Energy in air gap		52	mJ
Flux density		0,97	T
Air-gap height		3	mm
Voice coil height	3,9	4,5	4,5 mm
Core diameter		18	mm
Magnet material		ceramic	
diameter		45	mm
mass		0,093	kg
Mass of loudspeaker		0,303	kg
Magnetic stray field to DIN 45578, at 70 mm	max.	0,35	mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone, a textile rim and a screened magnet system.

Dimensions in mm

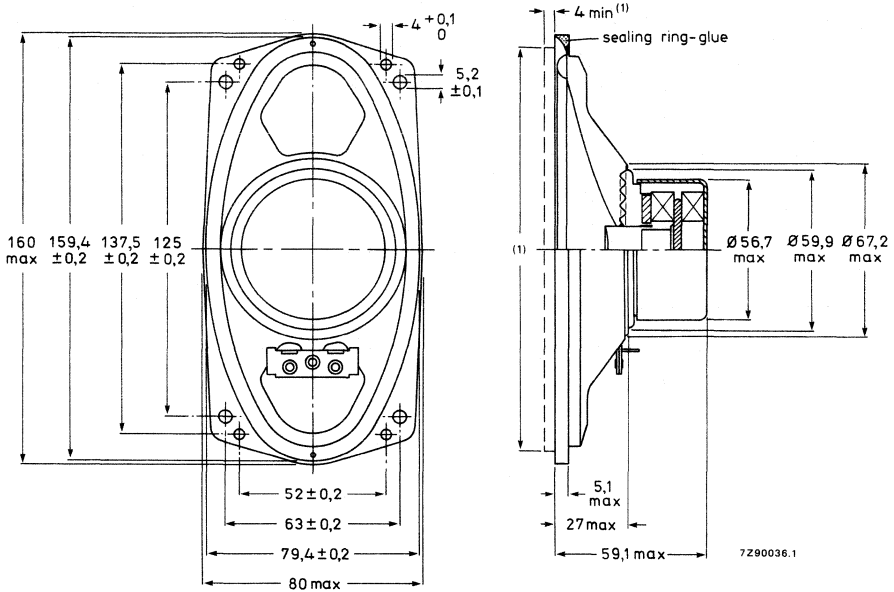


Fig. 1.

(1) Recommended baffle hole (oval, 71 x 152 mm) and clearance depth (4 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD36900/P4 catalogue number 2422 257 29121

AD36900/P8 catalogue number 2422 257 29122

AD36900/P15 catalogue number 2422 257 29123

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker unmounted.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

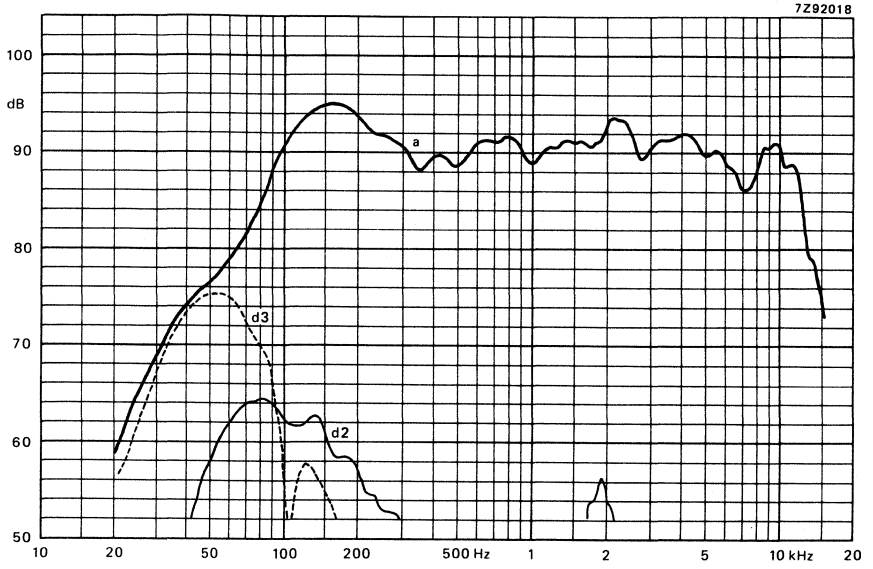


Fig. 2.

3 x 6 inch OVAL WOOFER LOUDSPEAKER

APPLICATION

For hi-fi video in open applications.

TECHNICAL DATA

	version		
	W4	W8	
Rated impedance	4	8	Ω
Voice coil resistance	3,4	7	Ω
Rated frequency range		65 to 18 000	Hz
Resonance frequency		75	Hz
Power handling capacity, measured without filter, loudspeaker unmounted		8	W
Maximum power on loudspeaker		20	W
Operating power (sound level 90 dB, 1 m)	3,1	3,9	W
Sweep voltage (50 to 1000 Hz)	4,5	6,3	V
Filter		none	
Energy in air gap		60,5	mJ
Flux density		1,008	T
Air-gap height		3	mm
Voice coil height	3,9	4,5	mm
Core diameter		18	mm
Magnet material		ceramic	
diameter		45	mm
mass		0,093	kg
Mass of loudspeaker		0,347	kg
Magnetic stray field to DIN 45578, at 70 mm	max.	0,35	mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone, a textile rim and a screened magnet system.

Dimensions in mm.

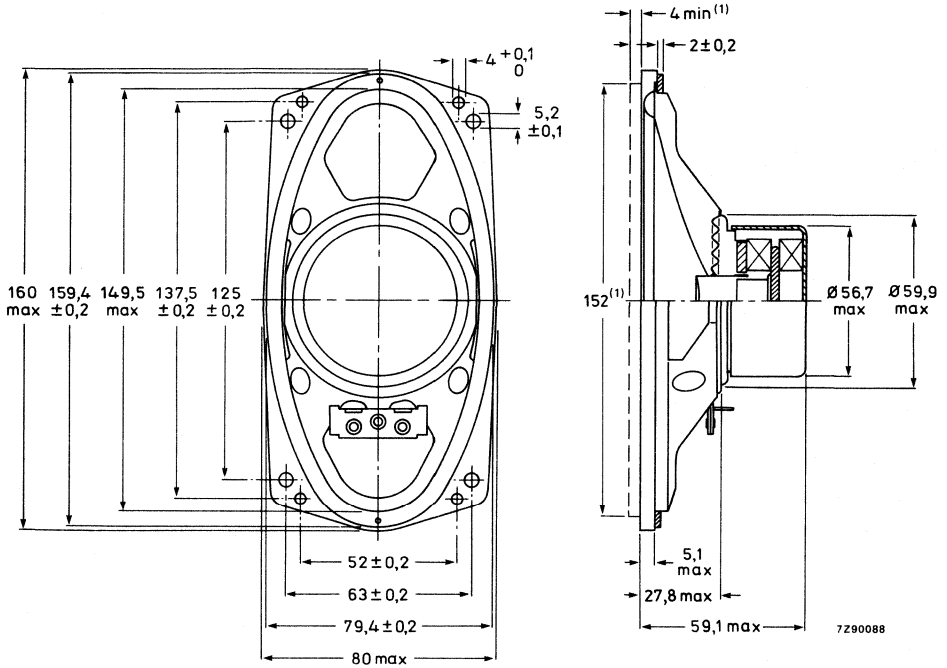


Fig. 1.

- (1) Recommended baffle opening (oval, 71 x 152 mm) and mounting clearance (4 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD36900/W4 catalogue number 2422 257 29025) These numbers are for bulk-packed loudspeakers.
AD36900/W8 catalogue number 2422 257 29026)

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

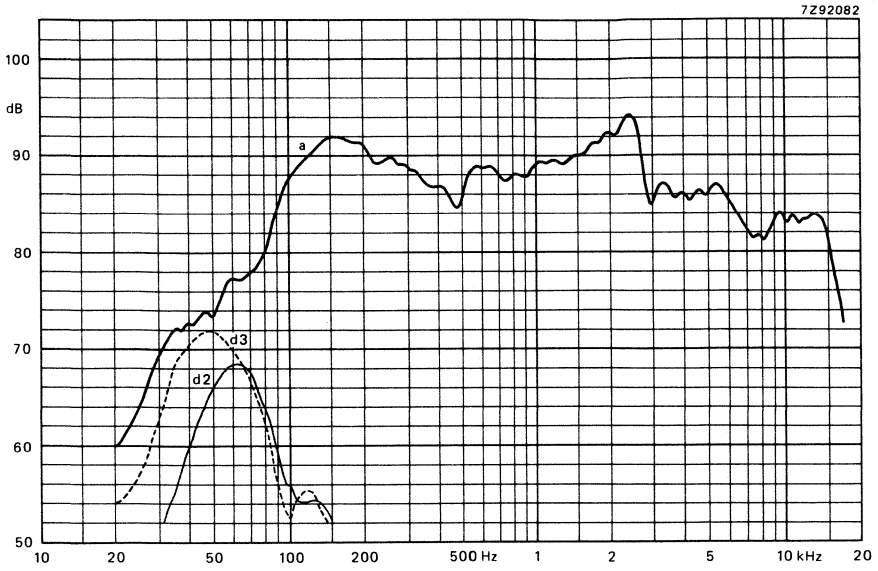


Fig. 2.

3 x 6 inch MEDIUM POWER FULL RANGE LOUDSPEAKER

APPLICATION

For video applications.

TECHNICAL DATA

	version		
	X8	X15	
Rated impedance	8	15	Ω
Voice coil resistance	7	13,2	Ω
Rated frequency range	65 to 18 000		Hz
Resonance frequency	95		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8		W
Maximum power on loudspeaker	15		W
Operating power (sound level 90 dB, 1 m)	1,6	1,7	W
Sweep voltage (50 to 1000 Hz)	5,6		V
Filter	none		
Energy in air gap	52		mJ
Flux density	0,97		T
Air-gap height	3		mm
Voice coil height	4,5		mm
Core diameter	18		mm
Magnet material	ceramic		
diameter	45		mm
mass	0,093		kg
Mass of loudspeaker	0,303		kg
Magnetic stray field to DIN 45578, at 70 mm max	0,35		mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone, a textile rim and a screened magnet system.

Dimensions in mm

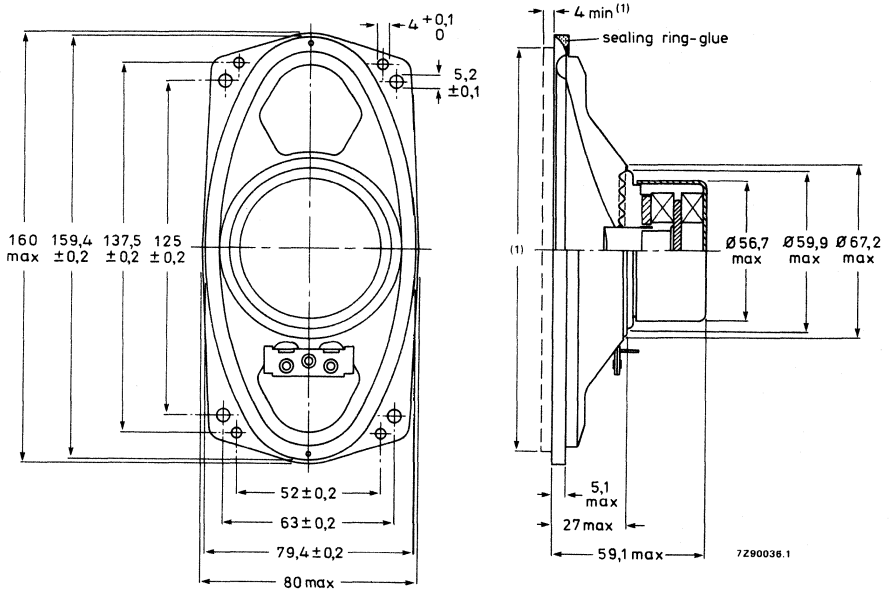


Fig. 1.

(1) Recommended baffle hole (oval of 71 x 152 mm) and clearance depth (4 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD36901/X8 catalogue number 2422 257 29222

AD36901/X15 catalogue number 2422 257 29223

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker unmounted.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92034

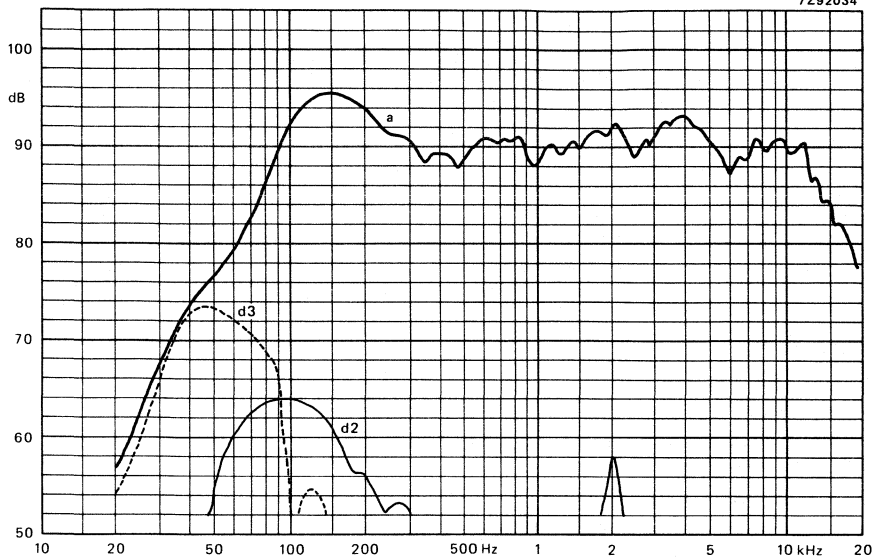


Fig. 2.

3 x 8 inch WOOFER LOUDSPEAKER

- for open video applications

TECHNICAL DATA

	version		
	P8	P15	
Rated impedance	8	15	Ω
Voice coil resistance	7	13,2	Ω
Resonance frequency	95		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8		W
Maximum power on loudspeaker	15		W
Operating power (sound level 90 dB, 1 m)	1,3		W
Sweep voltage (50 to 1000 Hz)	5,6		V
Filter	none		
Energy in air gap	60,5		mJ
Flux density	1,008		T
Air-gap height	3		mm
Voice coil height	4,5		mm
Core diameter	18		mm
Magnet material	ceramic		
diameter			mm
mass	0,093		kg
Mass of loudspeaker	0,367		kg
Magnetic stray field according to DIN 45578 max.	35		mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a textile rim.

Dimensions in mm

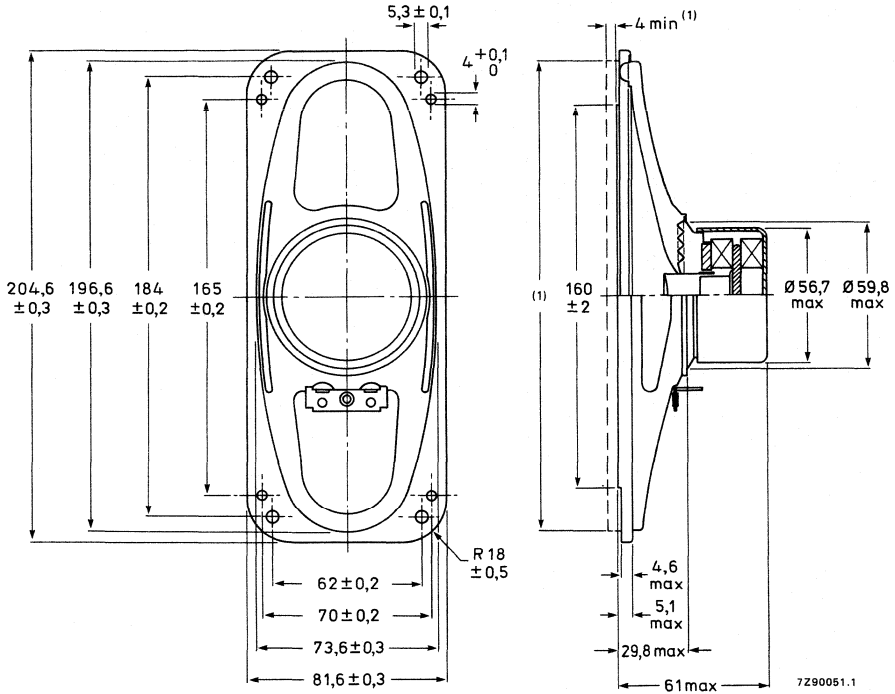


Fig. 1.

(1) Recommended baffle hole (oval, $75,5 \times 198 \text{ mm}$) and mounting clearance (4 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD38903/P8	catalogue number 2422 257 40424	} These numbers are for bulk-packed loudspeakers.
AD38903/P15	catalogue number 2422 257 40425	

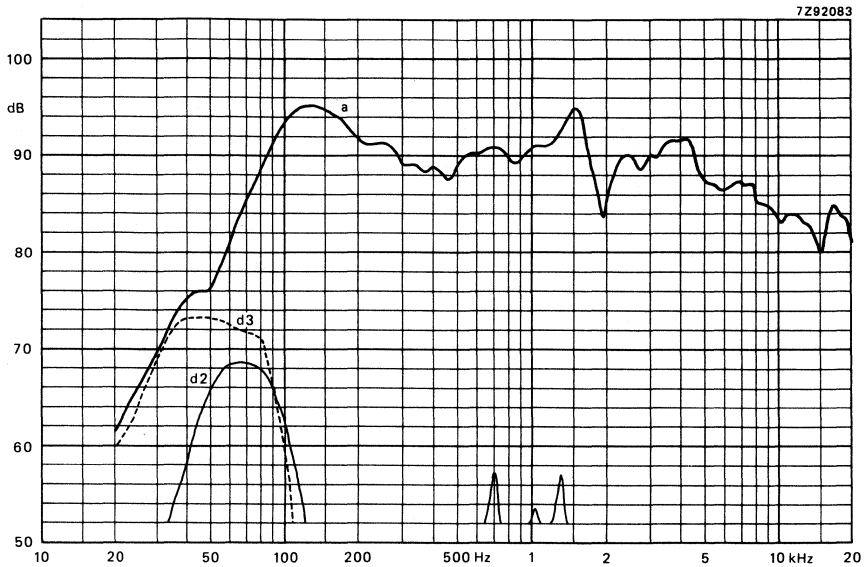


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

3 x 8 inch FULL RANGE LOUDSPEAKER

- frame: steel
- cone: paper
- surround: textile
- coil former: aluminium
- magnetic compensation: DIN 45578
- dustcap: black

TECHNICAL DATA

	version	
	X4	X8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7 Ω
Rated frequency range	60 to 20 000 Hz	
Resonance frequency	95	Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8	W
Max. power on loudspeaker	15	W
Operating power (sound level 90 dB, 1 m)	1,95	2 W
Sweep voltage (50 to 1000 Hz)	4	5,6 V
Filter	none	
Characteristic sensitivity	87,5	87 dB/W/m
Energy in air gap	60	mJ
Flux density	1,0	T
Air-gap height	3	mm
Voice coil height	3,9	4,5 mm
Rated core diameter	18	mm
Magnet material	ceramic	
diameter	45	mm
mass	0,093	kg
Mass of loudspeaker	0,367	kg
Magnetic stray field according to DIN 45578 (distance 7 cm)	35	mT

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

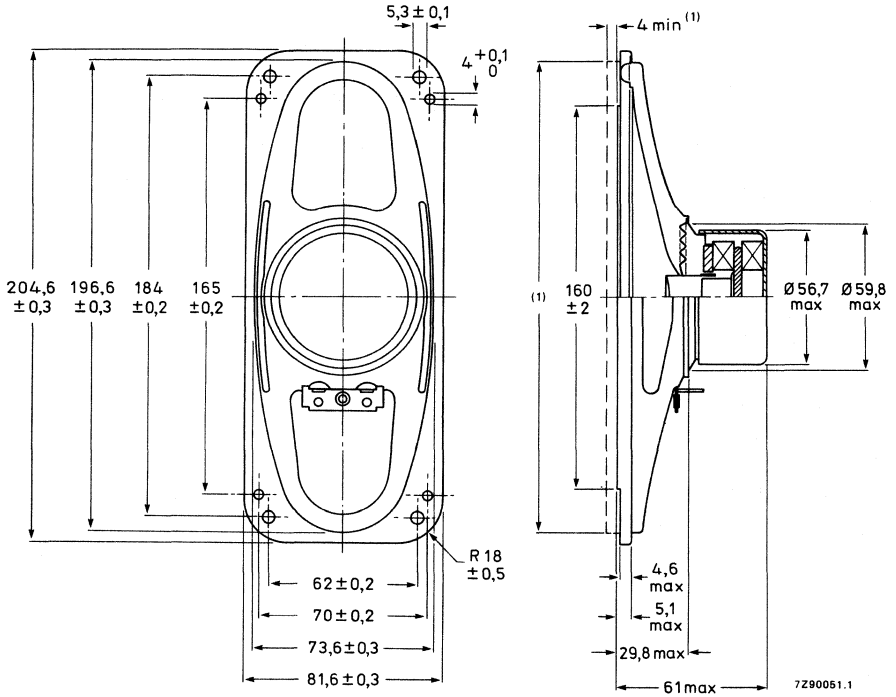


Fig. 1.

- (1) Recommended baffle opening (oval, $198,5 \times 75,5 \text{ mm}$) and mounting clearance (4 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD38903/X4 catalogue number 2422 257 40421)
AD38903/X8 catalogue number 2422 257 40422) These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92085

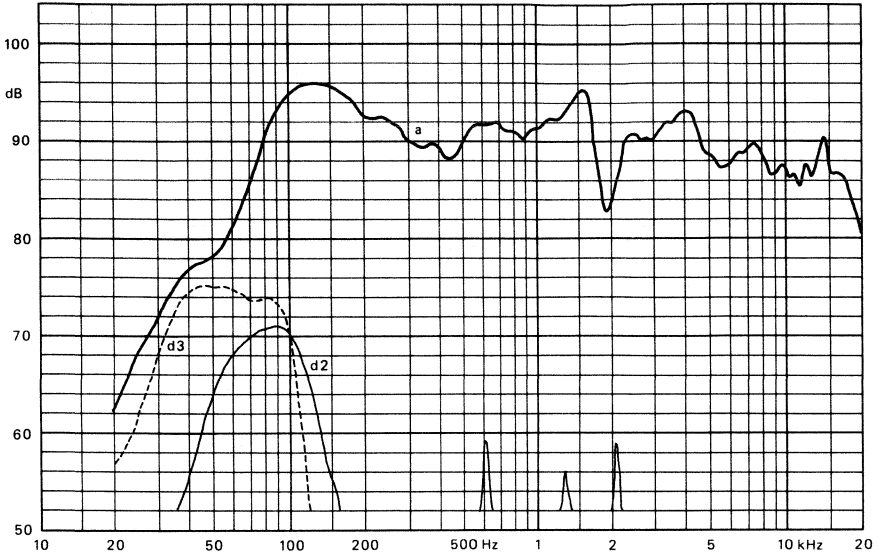


Fig. 2.

4 inch HIGH POWER WOOFER LOUDSPEAKER

APPLICATION

For high-fidelity bass reproduction in bass reflex enclosures specially for video applications. Recommended volume of enclosure 7 litres. The loudspeaker has a very low distortion, and a very low stray magnetic field.

TECHNICAL DATA

	version	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,2	7 Ω
Rated frequency range	70 to 10 000	Hz
Resonance frequency	72	Hz
Power handling capacity, mounted in 7 l bass reflex enclosure, measured without filter	20	W
Maximum power on loudspeaker	30	W
Operating power	7	8 W
Sweep voltage, frequency range: 30 to 6000 Hz	5,5	7,75 V
Energy in air gap	154	mJ
Flux density	0,96	T
Stray magnetic field according to DIN 45578 par. 2.2.5, distance 70 mm	0,35	T
Air-gap height	5	mm
Voice coil height	6	6,6 mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	60	mm
mass	0,225	kg
Mass of loudspeaker	0,68	kg

The loudspeaker has a paper cone and a rubber surround. Two tinned 2,8 mm (0,11 inch) tag connectors permit connection to the woofer by plugging or soldering.

Dimensions in mm

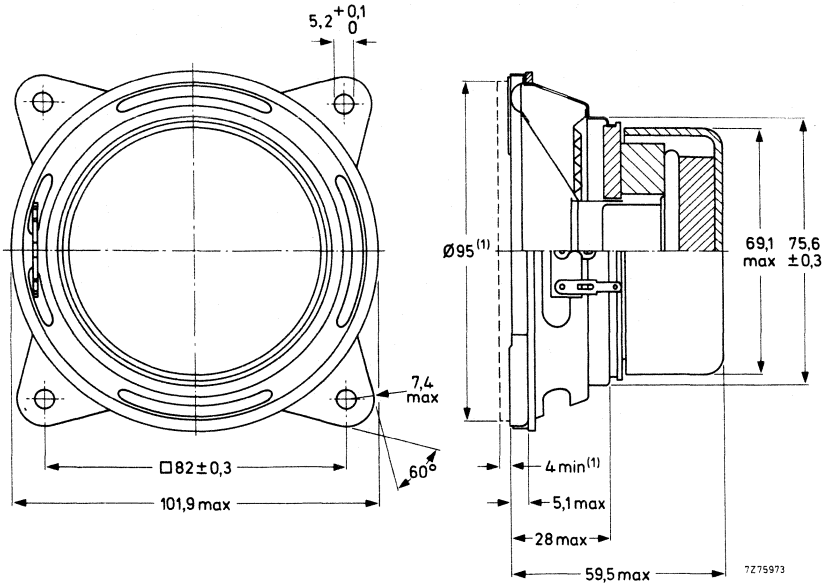


Fig. 1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD40501/W4, catalogue number 2422 257 34723

AD40501/W8, catalogue number 2422 257 34724

these numbers apply to bulk packed loudspeakers, minimum packing quantity 16 per unit.

FREQUENCY RESPONSE CURVES (See Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle according to IEC 268-5 par. 4-4.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

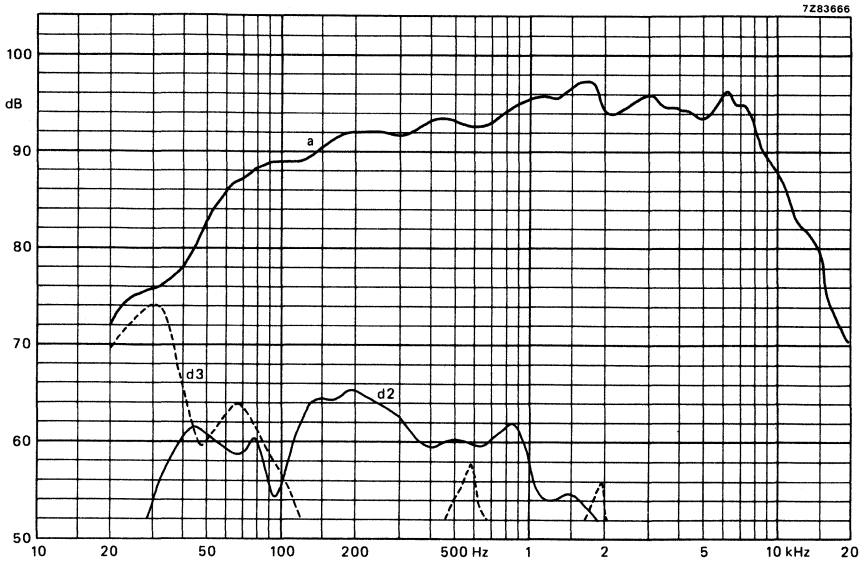


Fig. 2.

4 inch LOW POWER LOUDSPEAKERS

APPLICATION

For portable receivers and intercoms. AD40745 has a screened magnet system and is specially suitable for portable television sets.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	80 to 15 000			Hz
Resonance frequency	170			Hz
Power handling capacity, loudspeaker unmounted, measured without filter	5			W
Maximum power on loudspeaker	7			W
Operating power (sound level 90 dB, 0,5 m)	0,45			W
Sweep voltage (frequency range 100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker				
AD40725	70			g
AD40745	90			g

Connection is by means of 2,8 mm (0,11 inch) tag connectors or soldering.

The loudspeakers have a plastic frame, and a paper cone and surround.

AD40725/X.
AD40745/X.

Dimensions in mm

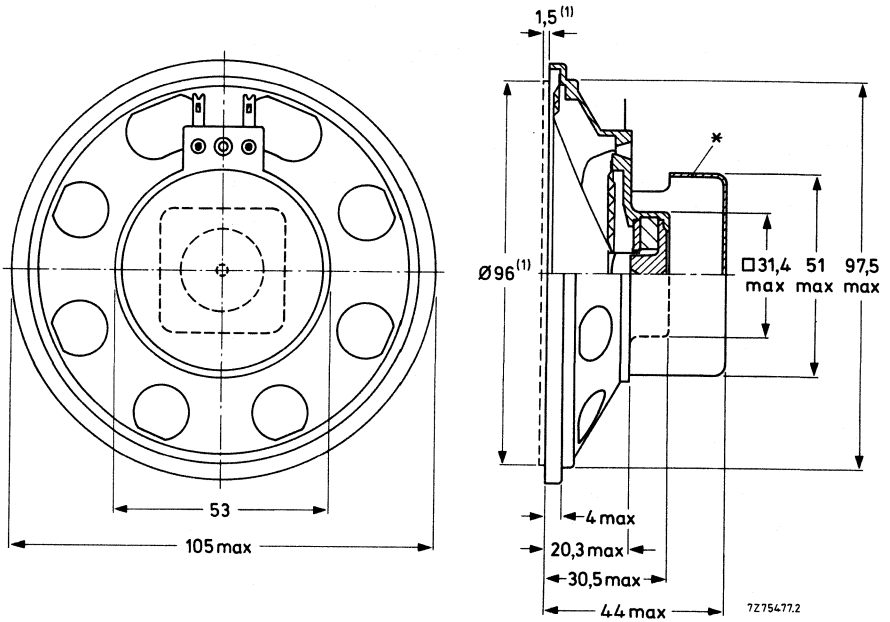


Fig. 1.

* Screening for AD40745 only.

(1) Recommended baffle opening ($\varnothing 96$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity.

AVAILABLE VERSIONS

AD40725/X4	catalogue number 2403 257 54225
AD40725/X8	catalogue number 2403 257 54226
AD40725/X15	catalogue number 2403 257 54227
AD40725/X25	catalogue number 2403 257 54228
AD40745/X4	catalogue number 2403 257 54325
AD40745/X8	catalogue number 2403 257 54326
AD40745/X15	catalogue number 2403 257 54327
AD40745/X25	catalogue number 2403 257 54328

These numbers apply to bulk packed loudspeakers, minimum packing quantity 50 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

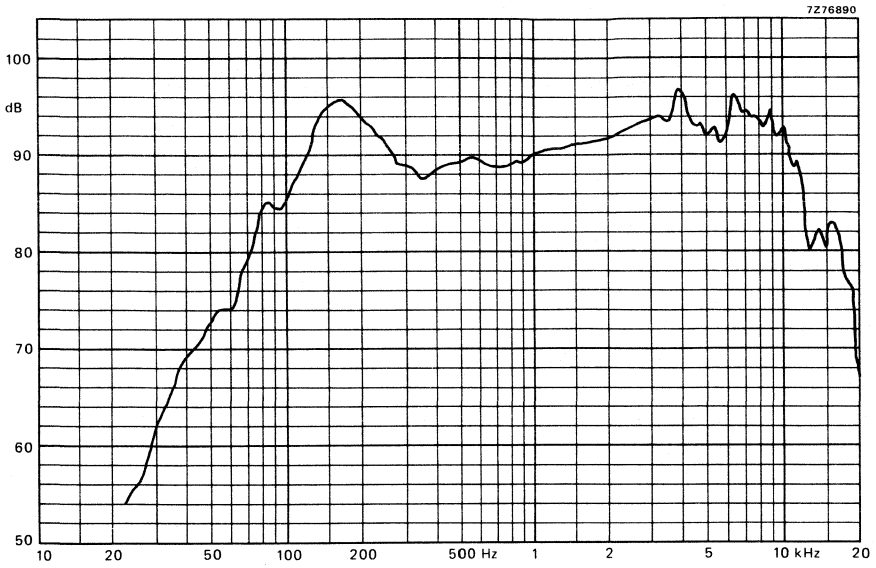


Fig. 2.

4 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version	
	4	8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7 Ω
Resonance frequency		150 Hz
Power handling capacity, measured without filter, loudspeaker unmounted		6 W
Maximum power on loudspeaker		10 W
Operating power (sound level 91 dB, 1 m)		0,85 W
Sweep voltage (80 to 20 000 Hz)	3,4	4,9 V
Filter		none
Energy in air gap		38 mJ
Flux density		1,1 T
Air-gap height		2,5 mm
Voice coil height		4,2 mm
Core diameter		14,5 mm
Magnet material		ceramic
diameter		45 mm
mass		0,053 kg
Mass of loudspeaker		0,175 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

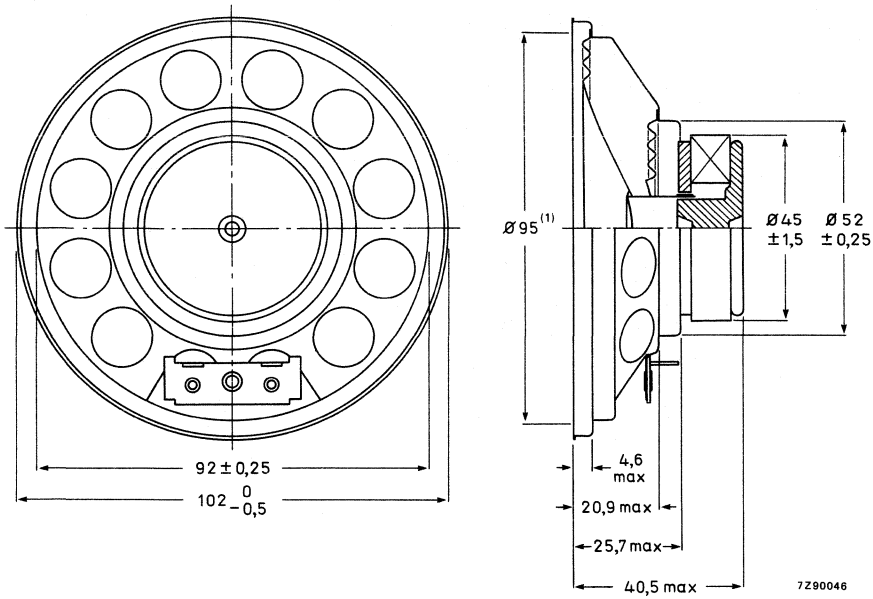


Fig. 1.

(1)
Recommended baffle hole: $\varnothing 95$ mm. The surround of the cone is specially treated. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD40880/X4 catalogue number 2422 257 44421 }
 AD40880/X8 catalogue number 2422 257 44422 } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

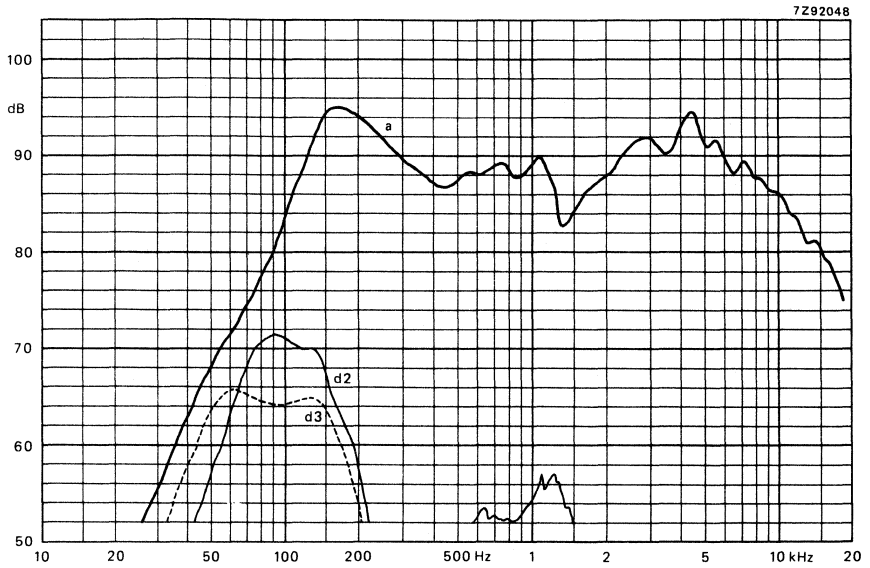


Fig. 2.

4 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version		
	X4	X8	X15
Rated impedance	4	8	15 Ω
Voice coil resistance	3,8	7	13 Ω
Rated frequency range	2000 to 16 000		Hz
Resonance frequency	170		Hz
Power handling capacity, measured without filter, loudspeaker unmounted	4		W
Maximum power on loudspeaker	8		W
Operating power (sound level 90 dB, 1m)	2,4		W
Sweep voltage (70 to 20 000 Hz)	2,8	4	5,4 V
Filter	none		
Energy in air gap	12,08		mJ
Flux density	0,57		T
Air-gap height	2,5		mm
Voice coil height	4	4,3	4,2 mm
Core diameter	14,5		mm
Magnet material	ceramic		
diameter	36		mm
mass	0,030		kg
Mass of loudspeaker	0,17		kg
Magnetic stray field according to DIN 45576	max.	0,35	mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

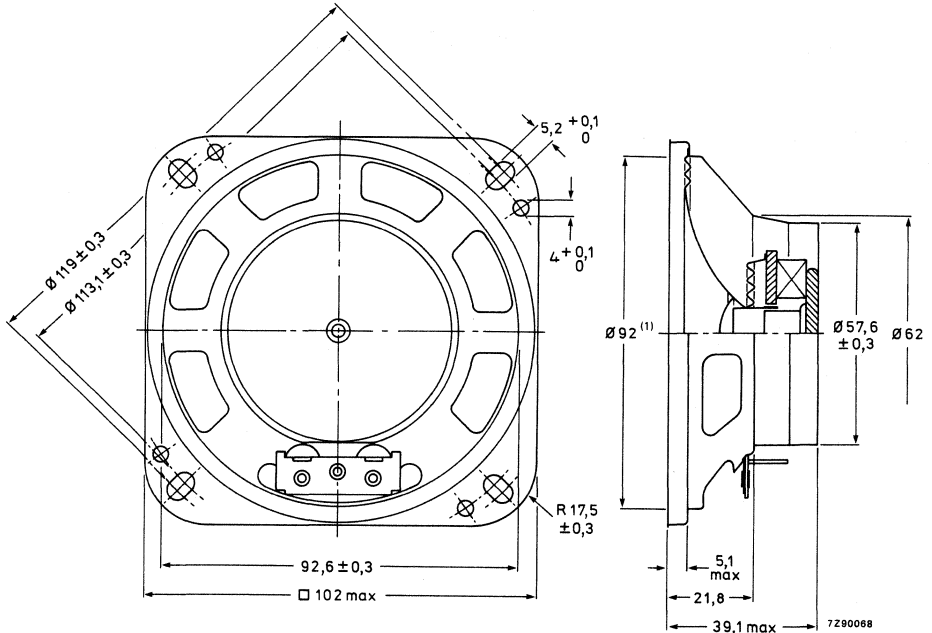


Fig. 1.

(1) Recommended baffle opening ($\varnothing 92 \text{ mm}$) and mounting clearance (2 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD44322/X4 catalogue number 2422 257 24731
 - AD44322/X8 catalogue number 2422 257 24732
 - AD44322/X15 catalogue number 2422 257 24733
- } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7292066

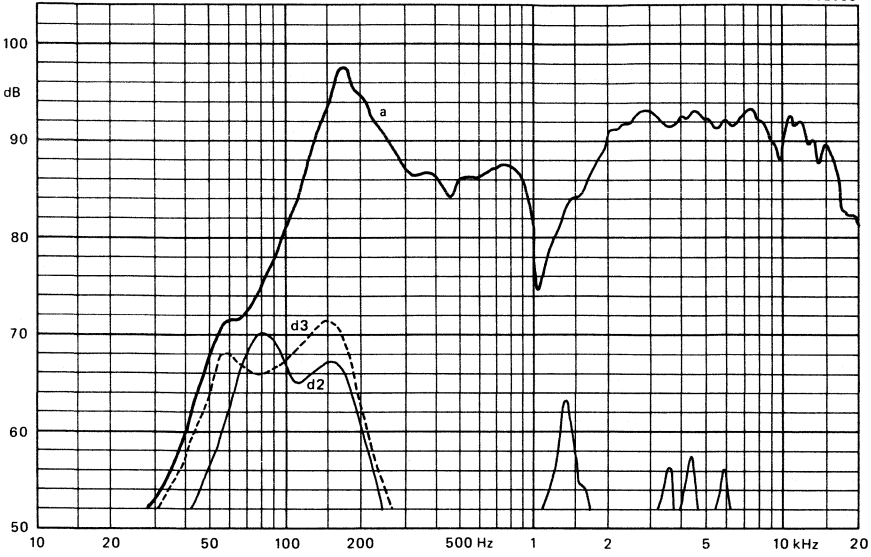


Fig. 2.

4 inch FULL RANGE ROUND LOUDSPEAKER

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Resonance frequency	110 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	15 W
Maximum power on loudspeaker	25 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (60 to 20 000 Hz)	5,5 V
Filter	none
Energy in air gap	78 mJ
Flux density	1,15 T
Air-gap height	3 mm
Voice coil height	4 mm
Core diameter	18 mm
Magnet material	ceramic
→ diameter	60 mm
mass	0,154 kg
Mass of loudspeaker	0,350 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a textile rim and an aluminium coil former.

Dimensions in mm

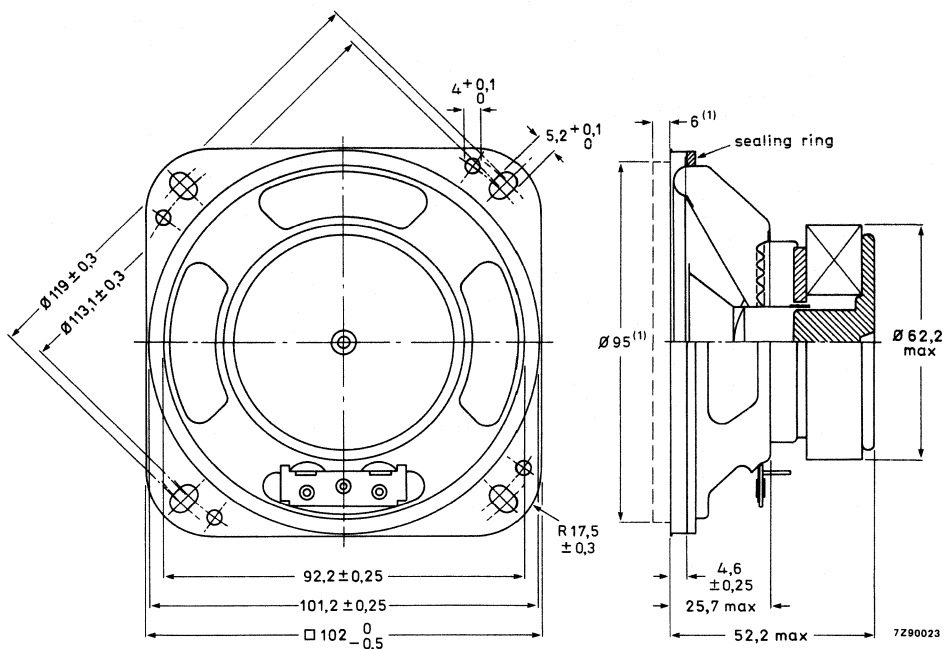


Fig. 1.

(1) Recommended baffle hole ($\varnothing 95$ mm) and clearance (6 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD44401/M4 catalogue number 2422 257 44131 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

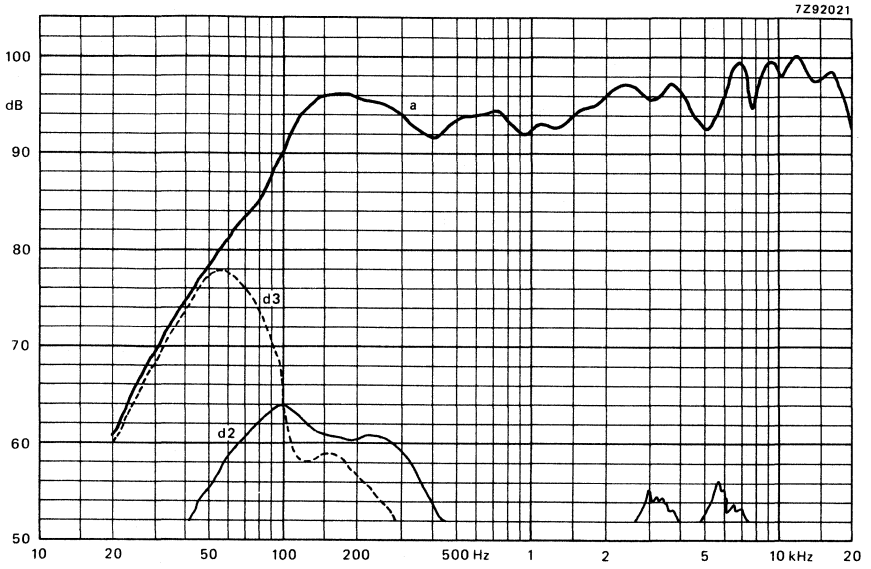


Fig. 2.

4 inch LOW POWER LOUDSPEAKERS

APPLICATION

For portable receivers and intercoms. AD44745 has a screened magnet system and is specially suitable for portable television sets.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	80 to 15 000				Hz
Resonance frequency	170				Hz
Power handling capacity, loudspeaker unmounted, measured without filter	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	0,45				W
Sweep voltage (frequency range 100 to 20 000 Hz)	2,4	3,5	4,7	6,1	V
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker,					
AD44725	70				g
AD44745	90				g

Connection is by means of 2,8 mm (0,11 inch) tag connectors or soldering.

The loudspeakers have a plastic frame, and a paper cone and surround.

Screened and compensated loudspeakers are available on request.



Dimensions in mm

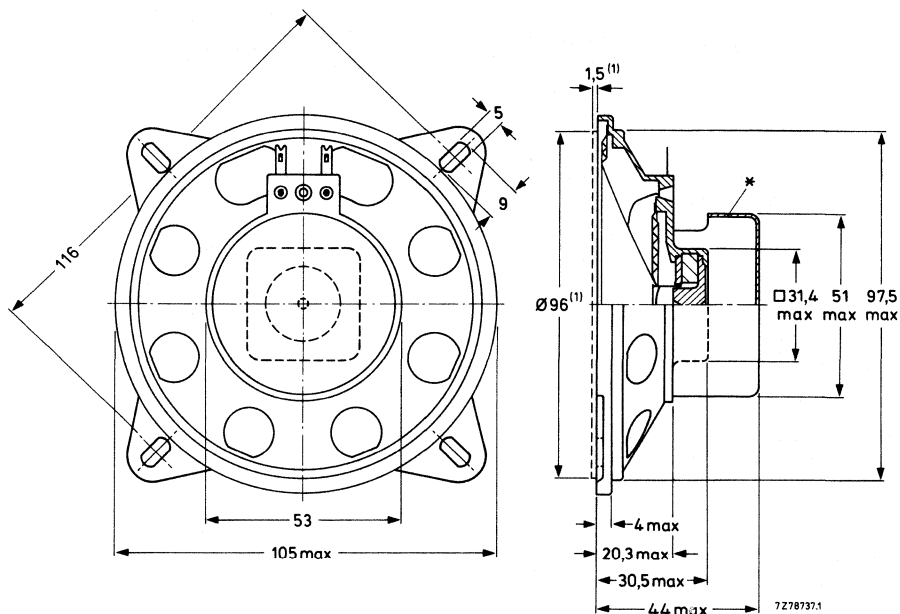


Fig. 1.

* Screening for AD44745 only.

(1) Recommended baffle opening ($\varnothing 96$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity.

AVAILABLE VERSIONS

type according to Fig. 1a.

AD44725/X4	catalogue number 2403 257 54825
AD44725/X8	catalogue number 2403 257 54826
AD44725/X15	catalogue number 2403 257 54827
AD44725/X25	catalogue number 2403 257 54828
AD44745/X4	catalogue number 2403 257 54725
AD44745/X8	catalogue number 2403 257 54726
AD44745/X15	catalogue number 2403 257 54727
AD44745/X25	catalogue number 2403 257 54728

These numbers apply to bulk packed loudspeakers, minimum packing quantity 50 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

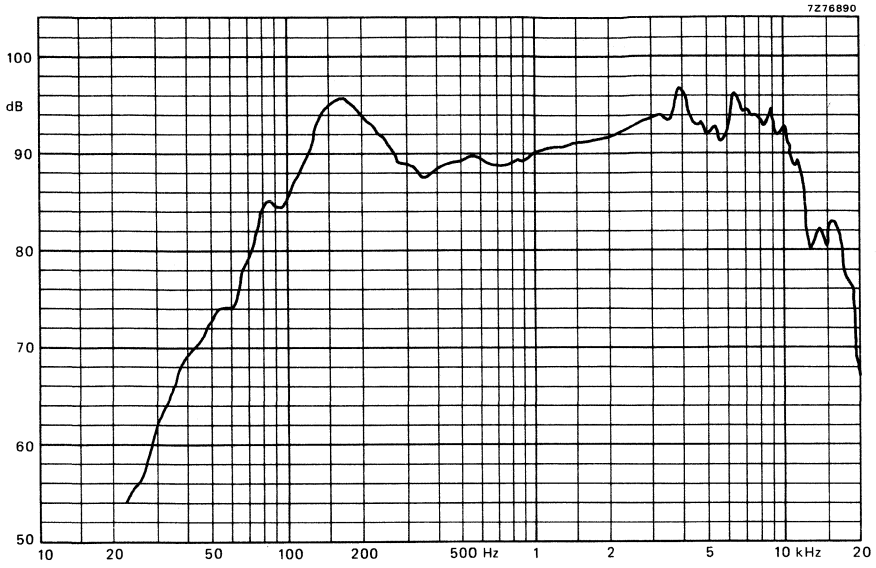


Fig. 2.

4 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version	
	X4	X8
Rated impedance	4	8 Ω
Voice coil resistance	3,2	7 Ω
Resonance frequency	140	Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8	W
Maximum power on loudspeaker	12	W
Operating power (sound level 90 dB, 1 m)	1	W
Sweep voltage (80 to 20 000 Hz)	4	5,6 V
Filter	none	
Characteristic sensitivity	90	dB/W/m
Energy in air gap	50	mJ
Flux density	0,95	T
Air-gap height	3	mm
Voice coil height	4	4,5 mm
Core diameter	18	mm
Magnet material	ceramic	
diameter	53	mm
mass	0,1	kg
Mass of loudspeaker	0,26	kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeakers have a textile rim.

Dimensions in mm

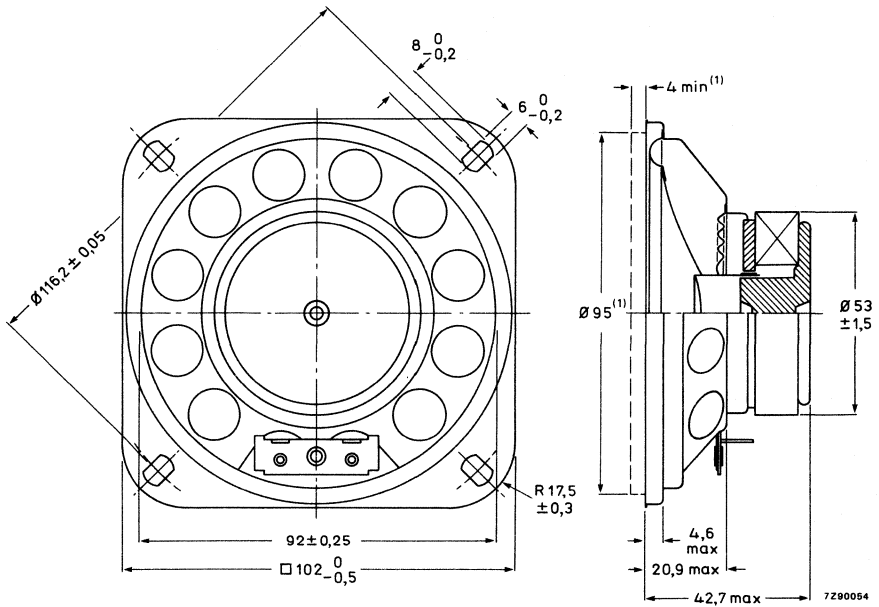


Fig. 1.

(1) Recommended baffle hole ($\phi 95$ mm) and clearance depth (4 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD44830/X4 catalogue number 2422 257 44531 |
 AD44830/X8 catalogue number 2422 257 44532 | These numbers are for bulk-packed loudspeakers.

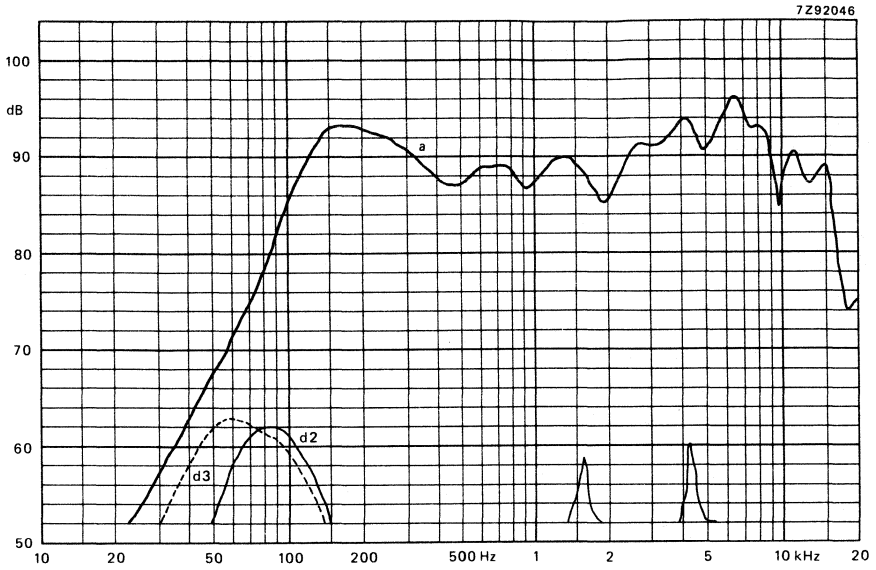


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

4 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version	
	X4	X8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7 Ω
Resonance frequency	150	Hz
Power handling capacity, measured without filter, loudspeaker unmounted	6	W
Maximum power on loudspeaker	10	W
Operating power (sound level 92 dB, 1 m)	0,85	W
Sweep voltage (80 to 20 000 Hz)	3,4	4,9 V
Filter	none	
Characteristic sensitivity	91	dB/W/m
Energy in air gap	38	mJ
Flux density	1,1	T
Air-gap height	2,5	mm
Voice coil height	4,2	mm
Core diameter	14,5	mm
Magnet material	ceramic	
diameter	45	mm
mass	0,053	kg
Mass of loudspeaker	0,185	kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

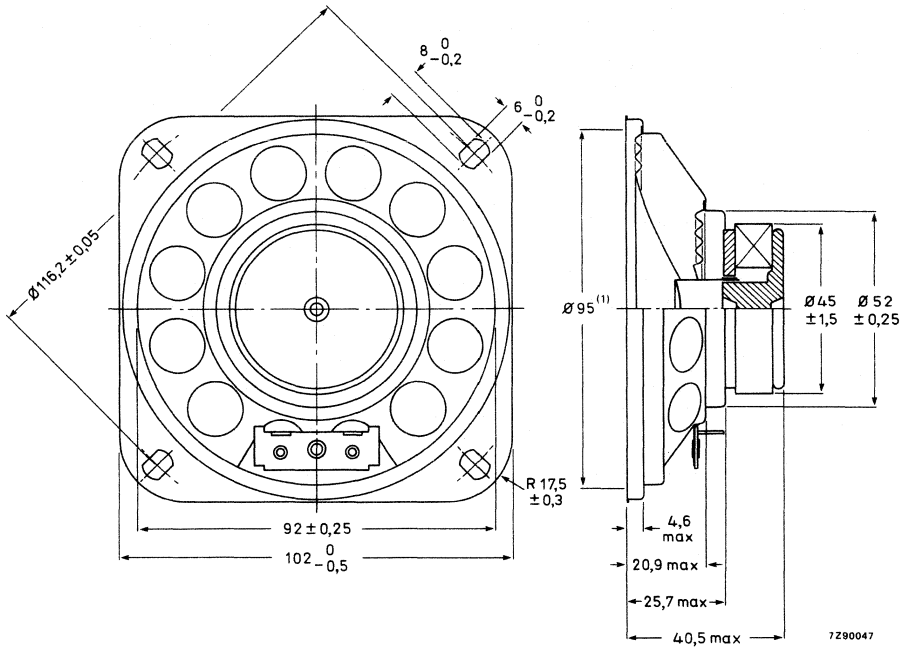


Fig. 1.

Recommended baffle opening $\varnothing 95$ mm. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD44880/X4 catalogue number 2422 257 44431

AD44880/X8 catalogue number 2422 257 44432

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

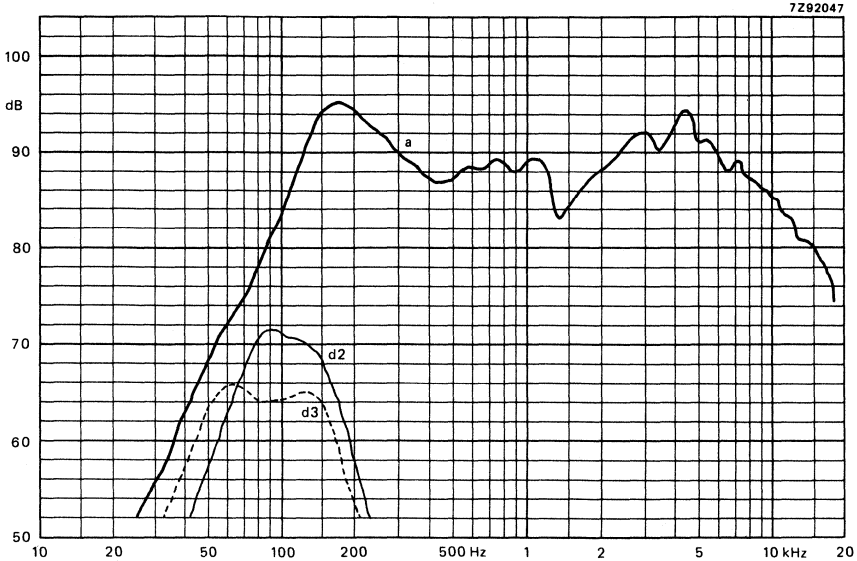


Fig. 2.

4 inch WOOFER LOUDSPEAKER

APPLICATION

The loudspeakers are particularly suitable for use in television because of the screened loudspeaker system.

TECHNICAL DATA

	version		
	P4	P8	P15
Rated impedance	4	8	15 Ω
Voice coil resistance	3,4	7,1	13,5 Ω
Resonance frequency		110	Hz
Power handling capacity, measured without filter, loudspeaker unmounted		8	W
Operating power (sound level 96 dB, 1 m)		1,5	W
Sweep voltage (35 to 20 000 Hz)		7,7	V
Filter		none	
Energy in air gap		60,5	mJ
Flux density		1,008	T
Air-gap height		3	mm
Voice coil height		4,5	mm
Core diameter		18	mm
Magnet material		ceramic	
diameter		45	mm
mass		0,093	kg
Mass of loudspeaker		0,35	kg
Magnetic stray field according to DIN 45578 max.		0,35	mT
Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.			

Dimensions in mm

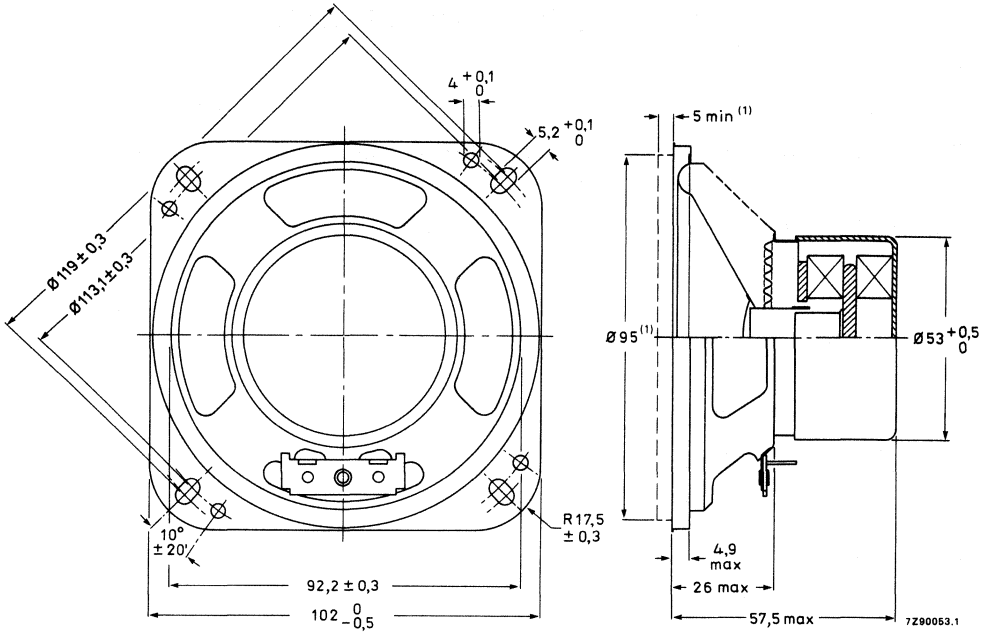


Fig. 1.

(1) Recommended baffle hole ($\phi 95 \text{ mm}$) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD44900/P4 catalogue number 2422 257 44325
- AD44900/P8 catalogue number 2422 257 44326
- AD44900/P15 catalogue number 2422 257 44327

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92049

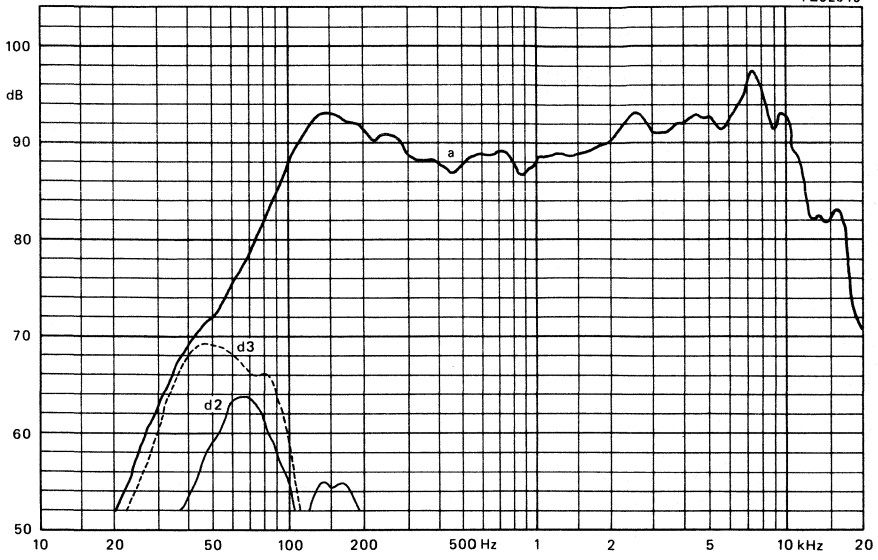


Fig. 2.

4 inch HIGH POWER WOOFER LOUDSPEAKERS

APPLICATION

For video applications.

TECHNICAL DATA

	version	
	W4	
Rated impedance	4	Ω
Voice coil resistance	3,2	Ω
Rated frequency range	40 – 10 000	Hz
Resonance frequency	65	Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8	W
Operating power (sound level 90 dB, 1 m)	2,25	W
Energy in air gap	60,5	mJ
Flux density	1,008	T
Air-gap height	3	mm
Voice coil height	3,9	mm
Core diameter	18	mm
Magnet material	ceramic	
diameter	45	mm
mass	0,093	kg
Mass of loudspeaker	0,35	kg

The loudspeaker has a paper cone and a foam surround, the magnet system is screened and compensated. Version AD44900W has a raised rim; version AD44901W is equipped with a flat rim.

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

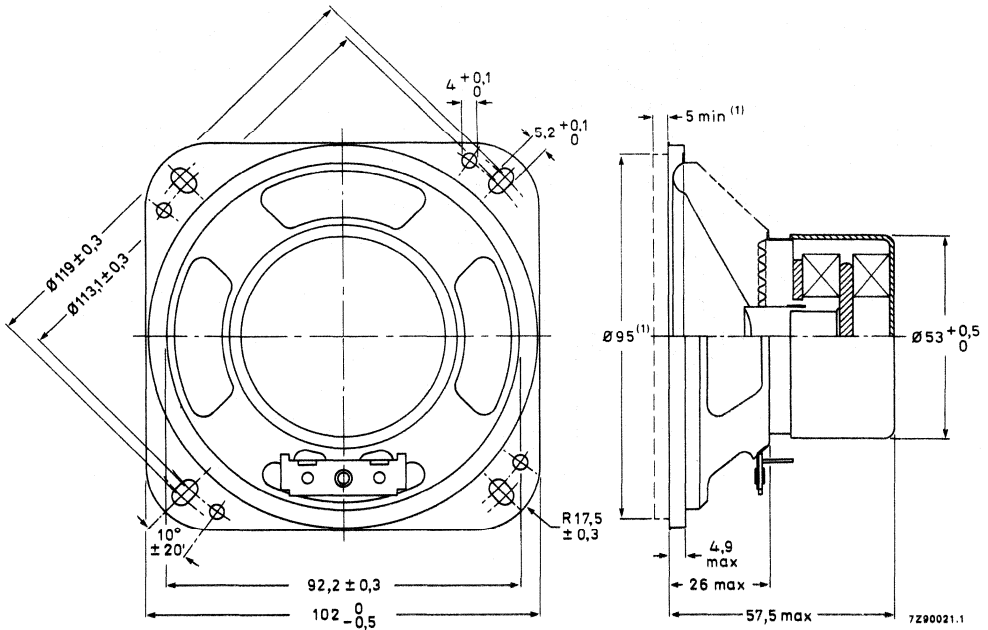


Fig. 1.

(1) Recommended baffle hole opening (ϕ 95 mm) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD44900/W4 catalogue number 2422 257 44225
AD44901/W4 catalogue number 2422 257 44235

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

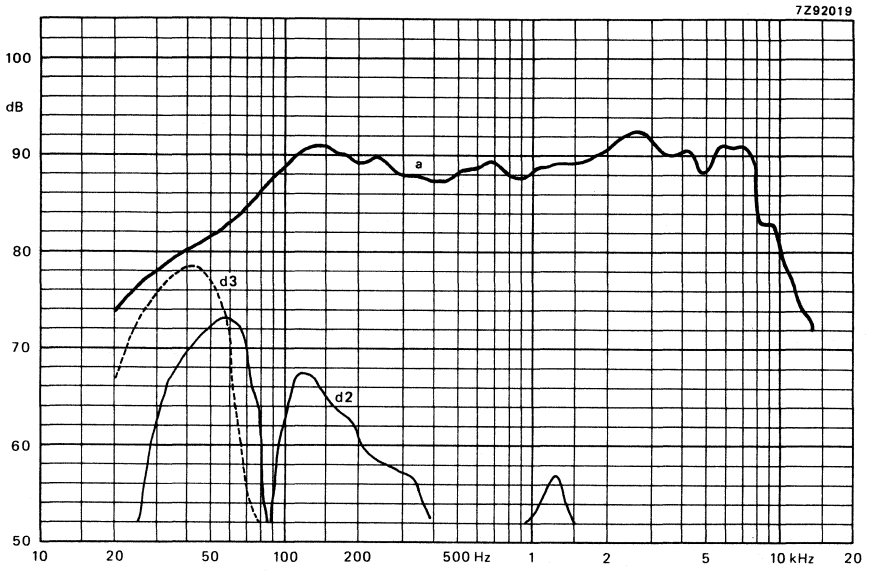


Fig. 2.

4 inch FULL RANGE LOUDSPEAKERS

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	50 to 20 000 Hz
Resonance frequency	100 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8 W
Operating power (sound level 86 dB, 1 m)	1,5 W
Sweep voltage (35 to 20 000 Hz)	4 V
Energy in air gap	60,5 mJ
Flux density	1,008 T
Air-gap height	3 mm
Voice coil height	3,9 mm
Core diameter	18 mm
Magnet material	ceramic
diameter	45 mm
mass	0,093 kg
Mass of loudspeaker	0,35 kg

The loudspeaker has a paper cone and a foam surround, the magnet system is screened and compensated. Version AD44900/X has a raised rim; version AD44901/X is equipped with a flat rim.

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

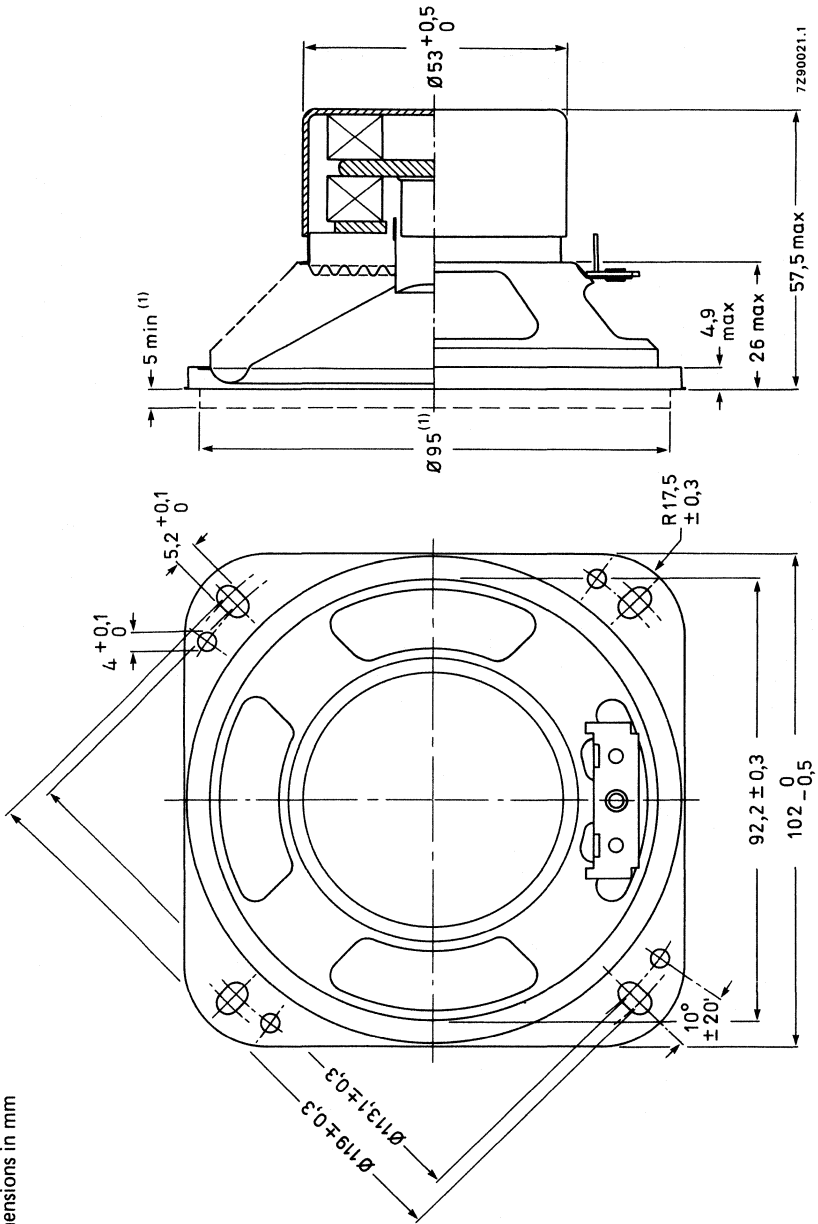


Fig. 1.

(1) Recommended baffle hole opening ($\phi 95 \text{ mm}$) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

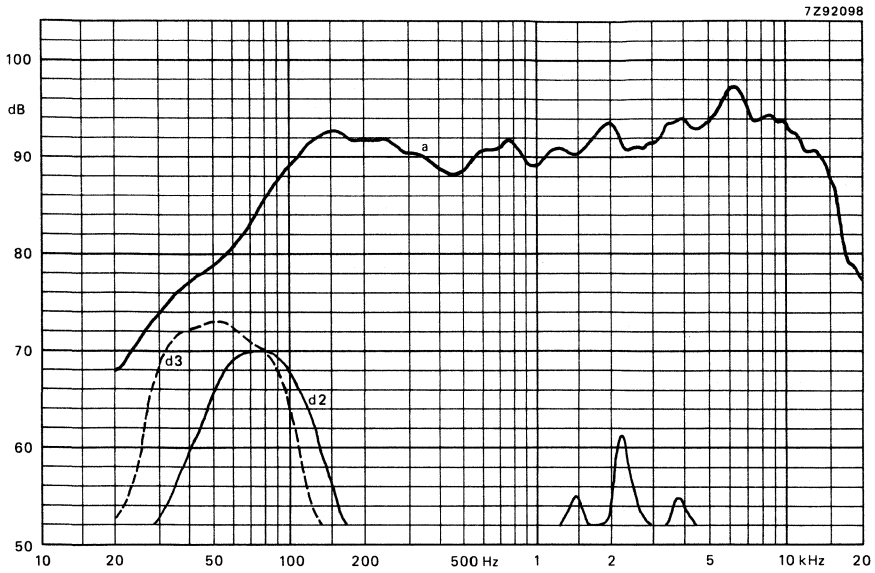


Fig. 2.

AVAILABLE VERSIONS

AD44900/X4	catalogue number 2422 257 44221		These numbers are for bulk-packed loudspeakers.
AD44901/X4	catalogue number 2422 257 44231		

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

4 x 6 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46740 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	100 to 15 000			Hz
Resonance frequency	130			Hz
Power handling capacity, according to DIN 45573, measured without filter, loudspeaker unmounted	4			W
Maximum power on loudspeaker	6			W
Operating power (sound level 90 dB, 1 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4			V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker				
AD46720	82			g
AD46740	103			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

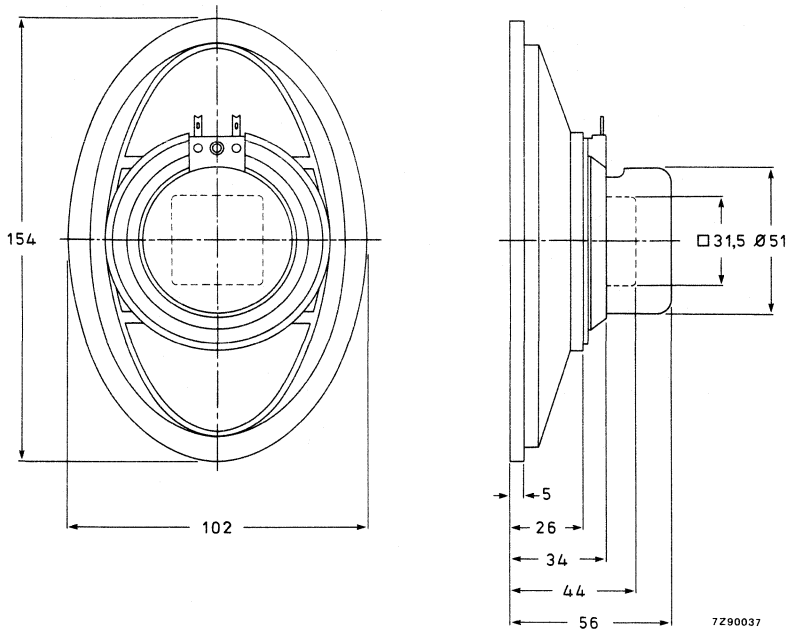


Fig. 1.

* Screening for AD46740 only.
Recommended baffle hole: 88 x 140, oval.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46720/X4 catalogue number 2403 257 29021
- AD46720/X8 catalogue number 2403 257 29022
- AD46720/X15 catalogue number 2403 257 29023
- AD46720/X25 catalogue number 2403 257 29024
- AD46740/X4 catalogue number 2403 257 29121
- AD46740/X8 catalogue number 2403 257 29122
- AD46740/X15 catalogue number 2403 257 29123
- AD46740/X25 catalogue number 2403 257 29124

These numbers are for
bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.
Curve a: Sound pressure.
Curves d2 and d3: 2nd and 3rd harmonic distortion.

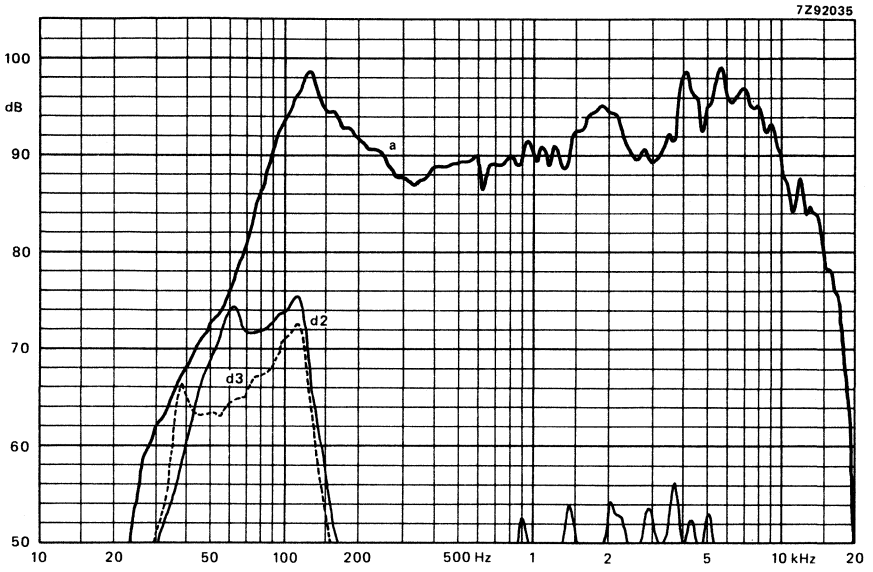


Fig. 2.

4 x 6 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46741 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	100 to 15 000				Hz
Resonance frequency	130				Hz
Power handling capacity, according to DIN 45573, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	6				W
Operating power (sound level 90 dB, 1 m)	400				mW
Sweep voltage (100 to 20 000 Hz)	2,4				V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD46721	82				g
AD46742	103				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Screened and compensated loudspeakers are available on request.



AD46721/X.
AD46741/X.

Dimensions in mm

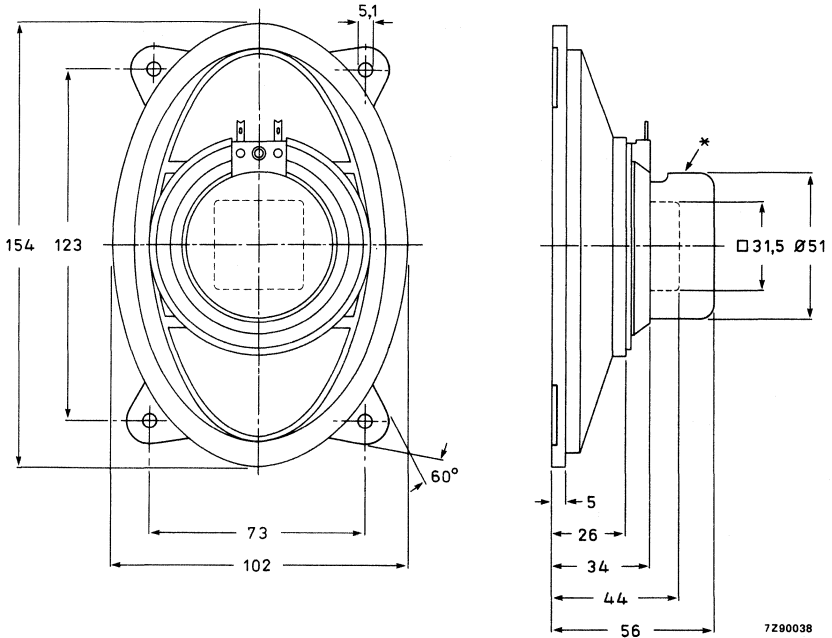


Fig. 1.

* Screening for AD46741 only.

Recommended baffle hole: 88 x 140 mm, oval.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46721/X4 catalogue number 2403 257 29221
- AD46721/X8 catalogue number 2403 257 29222
- AD46721/X15 catalogue number 2403 257 29223
- AD46721/X25 catalogue number 2403 257 29224

- AD46741/X4 catalogue number 2403 257 29321
- AD46741/X8 catalogue number 2403 257 29322
- AD46741/X15 catalogue number 2403 257 29323
- AD46741/X25 catalogue number 2403 257 29324

These numbers are for
bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

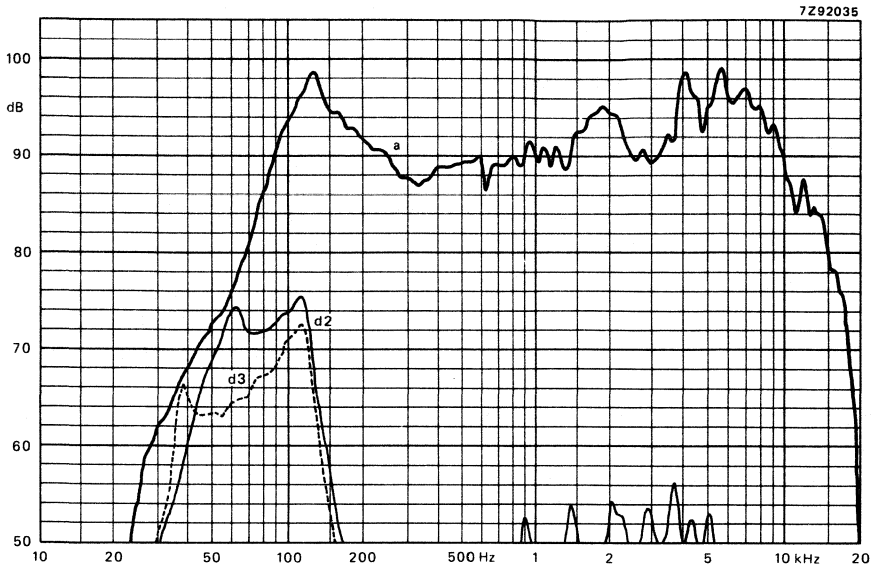


Fig. 2.

4 x 6 inch OVAL MEDIUM POWER LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46742 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	100 to 15 000			Hz
Resonance frequency	130			Hz
Power handling capacity, according to DIN 45573, measured without filter, loudspeaker unmounted	5			W
Maximum power on loudspeaker	6			W
Operating power (sound level 90 dB, 1 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Characteristic sensitivity	71			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker	103			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

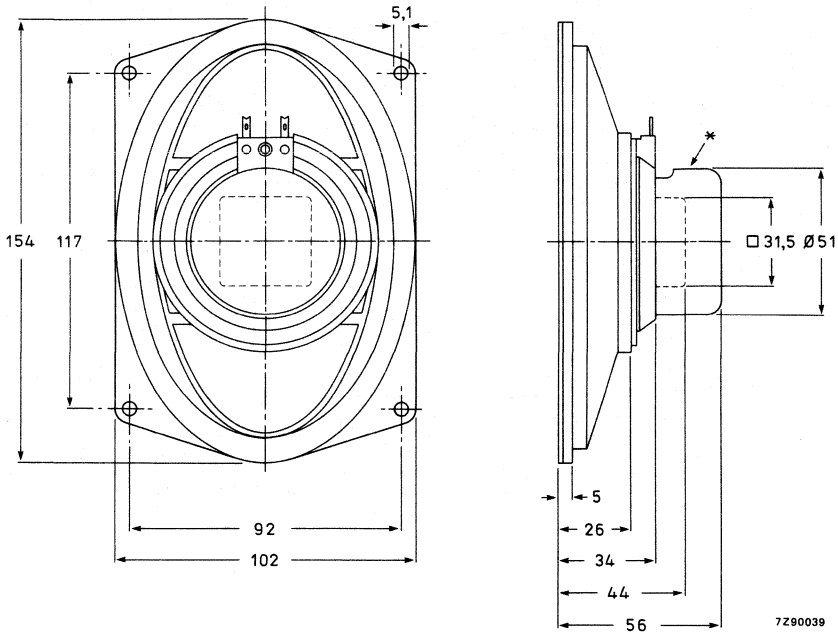


Fig. 1.

* Screening for AD46742 only.
Recommended baffle hole: 88 mm x 140 mm (oval).
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46722/X4 catalogue number 2403 257 29421
- AD46722/X8 catalogue number 2403 257 29422
- AD46722/X15 catalogue number 2403 257 29423
- AD46722/X25 catalogue number 2403 257 29424

- AD46742/X4 catalogue number 2403 257 29521
- AD46742/X8 catalogue number 2403 257 29522
- AD46742/X15 catalogue number 2403 257 29523
- AD46742/X25 catalogue number 2403 257 29524

These numbers are for
bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.
Curve a: Sound pressure.
Curves d2 and d3: 2nd and 3rd harmonic distortion.

AD46722/X.
AD46742/X.

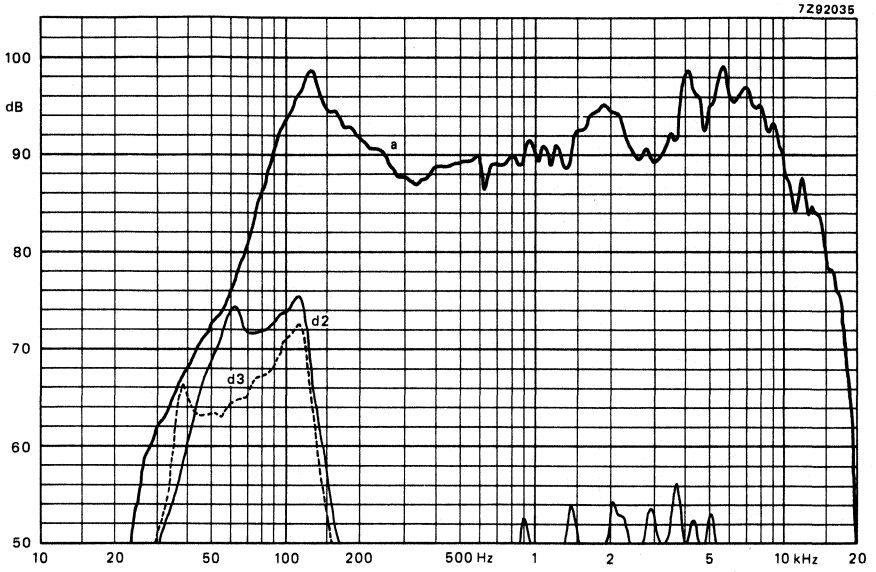


Fig. 2.

4 x 6 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46746 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	100 to 15 000				Hz
Resonance frequency	130				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	400				mW
Sweep voltage (100 to 20 000 Hz)	2,4				V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD46725	80				g
AD46746	100				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeakers have a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request.



AD46725/X.
AD46746/X.

Dimensions in mm

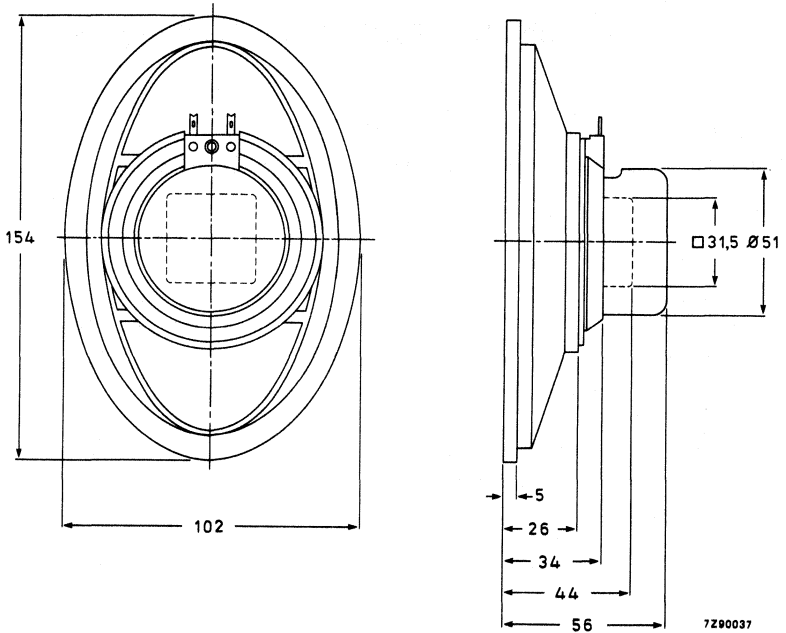


Fig. 1.

* Screening for AD46746 only.

Recommended baffle hole: 88 x 140, oval. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD46725/X4	catalogue number 2403 257 59021
AD46725/X8	catalogue number 2403 257 59022
AD46725/X15	catalogue number 2403 257 59023
AD46725/X25	catalogue number 2403 257 59024
AD46746/X4	catalogue number 2403 257 59121
AD46746/X8	catalogue number 2403 257 59122
AD46746/X15	catalogue number 2403 257 59123
AD46746/X25	catalogue number 2403 257 59124

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

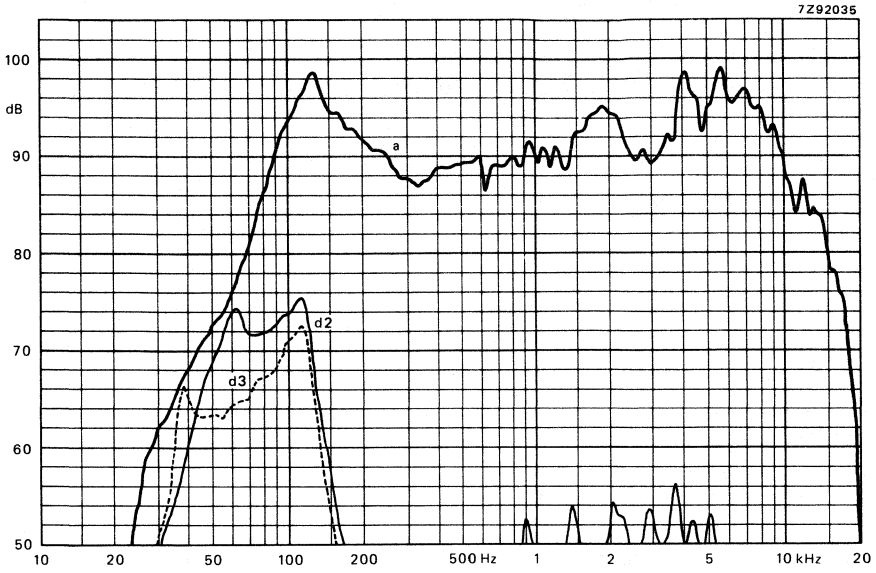


Fig. 2.

4 x 6 inch FULL RANGE LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46747 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	100 to 15 000			Hz
Resonance frequency	130			Hz
Power handling capacity measured without filter, loudspeaker unmounted	5			W
Maximum power on loudspeaker	7			W
Operating power (sound level 90 dB, 0,5 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4			V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker				
AD46726	80			g
AD46747	100			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeakers have a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm


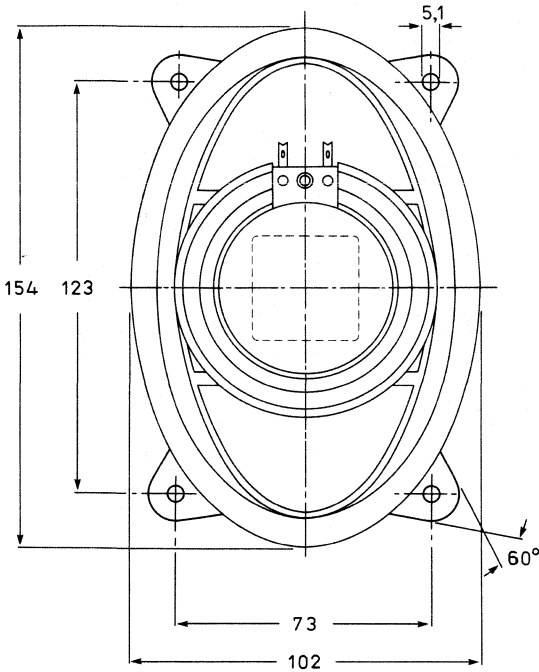


Fig. 1.

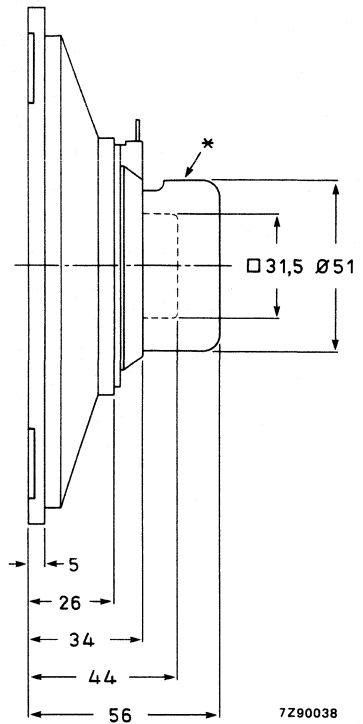

7290038

* Screening for AD46747 only.
Recommended baffle hole: 88 x 140 mm, oval.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46726/X4 catalogue number 2403 257 59221
- AD46727/X8 catalogue number 2403 257 59222
- AD46726/X15 catalogue number 2403 257 59223
- AD46726/X25 catalogue number 2403 257 59224

- AD46747/X4 catalogue number 2403 257 59321
- AD46747/X8 catalogue number 2403 257 59322
- AD46747/X15 catalogue number 2403 257 59323
- AD46747/X25 catalogue number 2403 257 59324

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

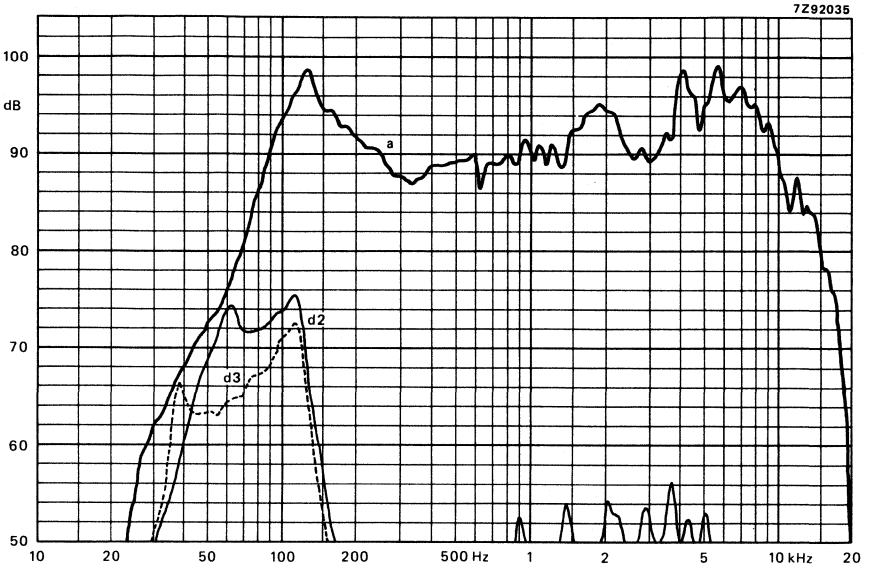


Fig. 2.

4 x 6 inch OVAL MEDIUM POWER LOUDSPEAKERS

APPLICATION

Oval loudspeaker for audio and video applications. AD46748 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,1	22,8 Ω
Rated frequency range	100 to 15 000			Hz
Resonance frequency	130			Hz
Power handling capacity measured without filter, loudspeaker unmounted	5			W
Maximum power on loudspeaker	7			W
Operating power (sound level 90 dB, 0,5 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Characteristic sensitivity	71			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker				
AD46727	80			g
AD46748	100			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeakers have a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request.



Dimensions in mm

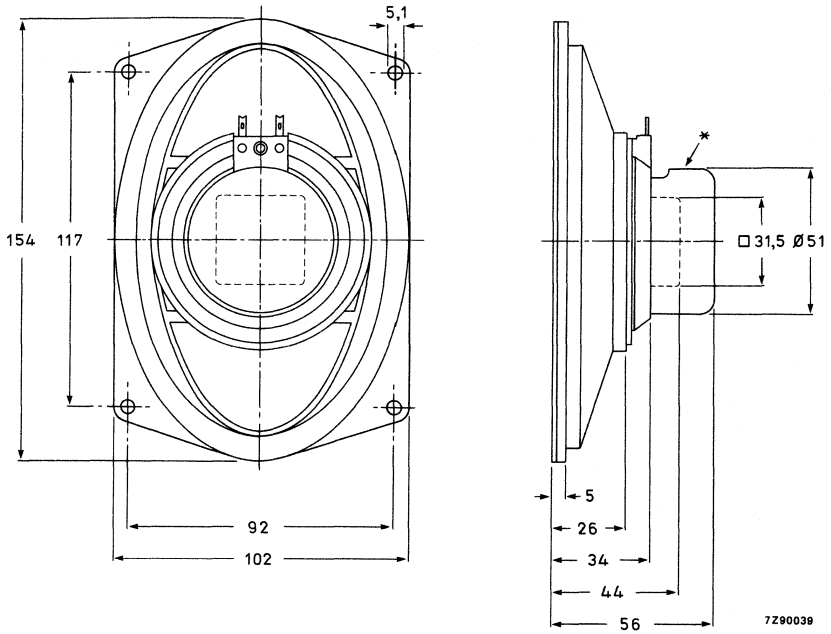


Fig. 1.

* Screening for AD46748 only.

Recommended baffle hole: 88 mm x 140 mm (oval). One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD46727/X4	catalogue number 2403 257 59421	} These number are for bulk-packed loudspeakers
AD46727/X8	catalogue number 2403 257 59422	
AD46727/X15	catalogue number 2403 257 59432	
AD46727/X25	catalogue number 2403 257 59424	
AD46748/X4	catalogue number 2403 257 59521	
AD46748/X8	catalogue number 2403 257 59522	
AD46748/X15	catalogue number 2403 257 59523	
AD46748/X25	catalogue number 2403 257 59524	

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7292035

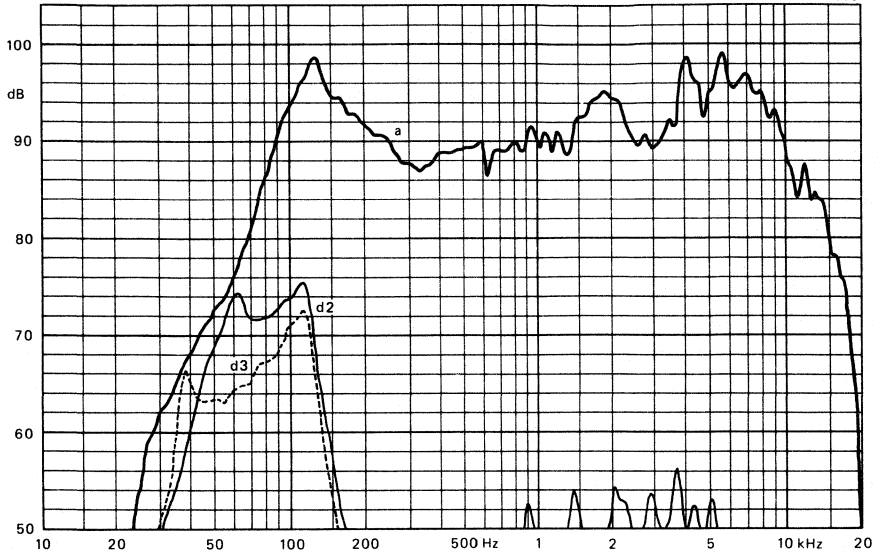


Fig. 2.

3½ × 6 inch FULL RANGE OVAL LOUDSPEAKER**TECHNICAL DATA**

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Resonance frequency	120 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	8 W
Operating power (sound level 90 dB, 1 m)	1,2 W
Sweep voltage (60 to 20 000 Hz)	4 V
Filter	none
Flux density	1 T
Air-gap height	3 mm
Voice coil height	4 mm
Core diameter	18 mm
Magnet material	ceramic
→ diameter	53 mm
mass	0,1 kg
Mass of loudspeaker	0,27 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

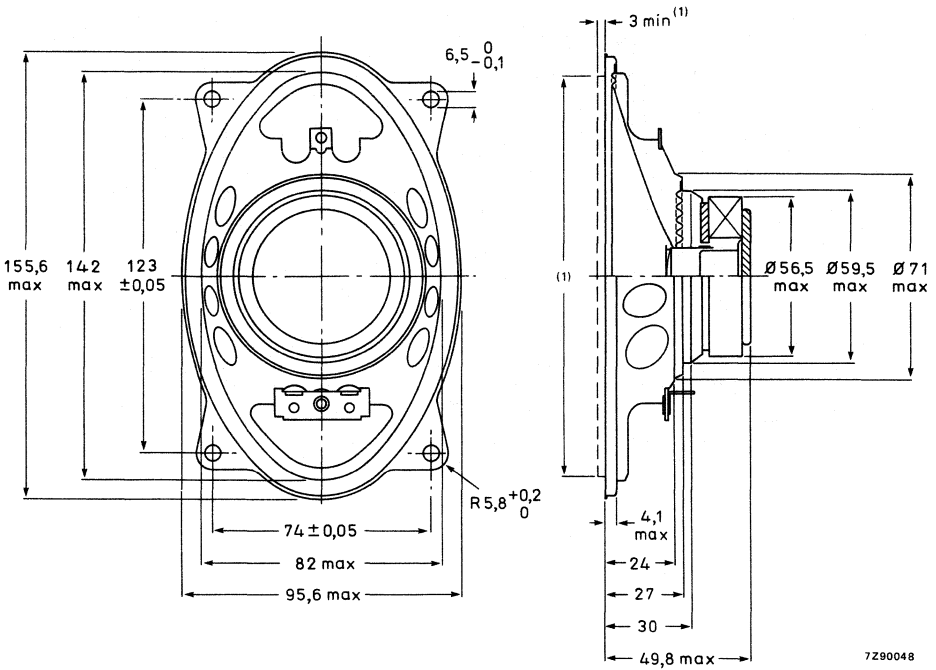


Fig. 1.

(1) Recommended baffle hole (oval of 142 mm x 82 mm) and clearing depth (3 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD46801/X4 catalogue number 2422 257 20231. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

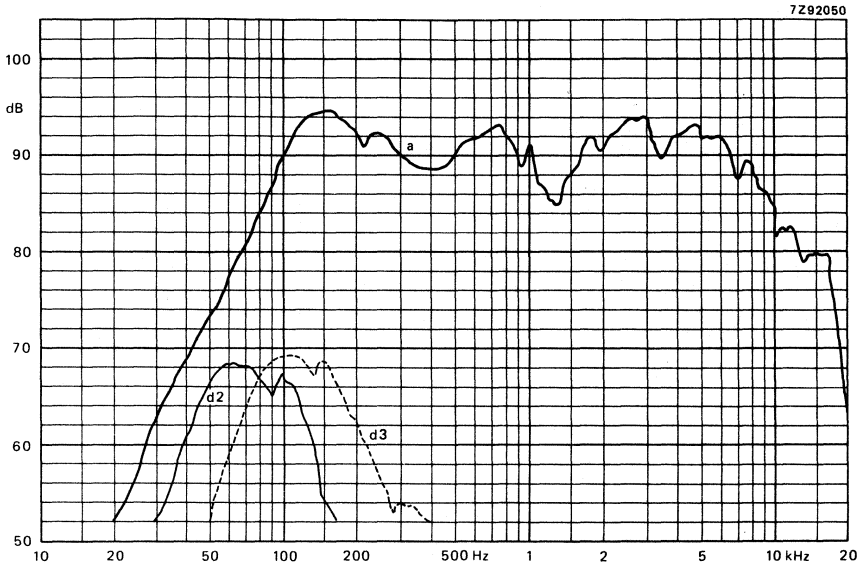


Fig. 2.

3½ × 6 inch FULL RANGE OVAL LOUDSPEAKER**TECHNICAL DATA**

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Resonance frequency	140 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	6 W
Operating power (sound level 90 dB, 1 m)	1,2 W
Sweep voltage (70 to 20000 Hz)	3 V
Filter	none
Flux density	0,74 T
Air-gap height	3 mm
Voice coil height	4 mm
Core diameter	18 mm
Magnet material	ceramic
diameter	53 mm ←
mass	0,07 kg
Mass of loudspeaker	0,23 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

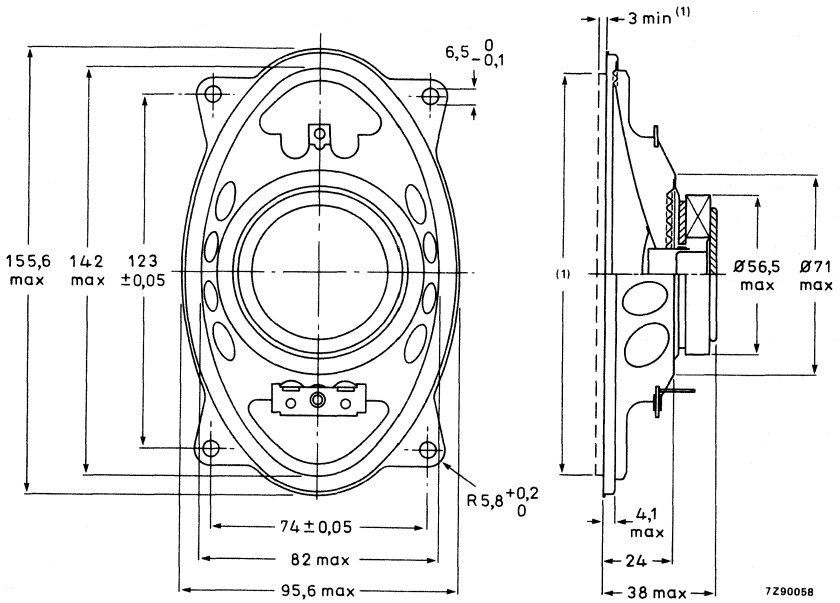


Fig. 1.

(1) Recommended baffle (oval of 142 mm x 82 mm) and clearing depth (3 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD46810/X4; catalogue number 2422 257 20221. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z92051

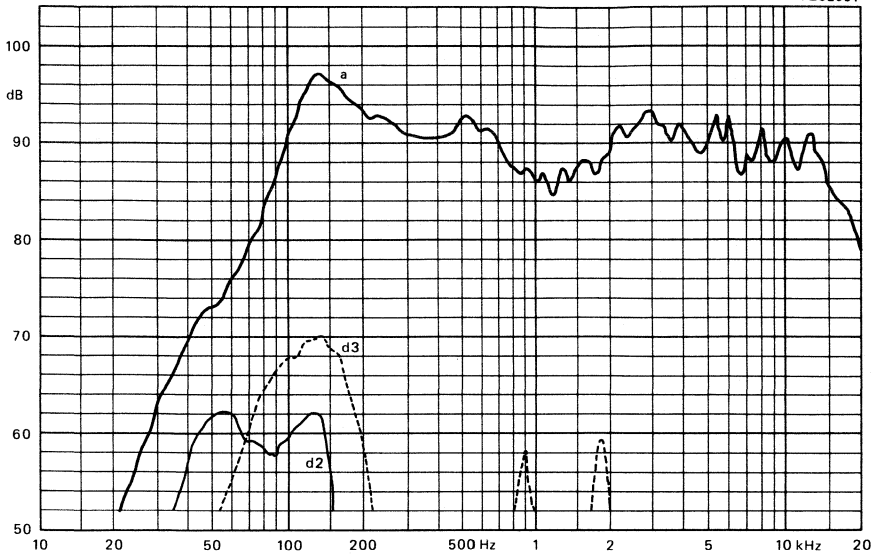


Fig. 2.



4 x 6 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version		
	M4	M8	M15
Rated impedance	4	8	15 Ω
Voice coil resistance	3,4	7	13,2 Ω
Resonance frequency		150	Hz
Power handling capacity, measured without filter, loudspeaker unmounted		6	W
Maximum power on loudspeaker		12	W
Operating power (sound level 90 dB, 1 m)		1	W
Sweep voltage (35 to 20 000 Hz)	3,5	4,9	6,7 V
Filter		none	
Energy in air gap		60,5	mJ
Flux density		1,008	T
Air-gap height		3	mm
Voice coil height	4	4,5	4,4 mm
Core diameter		18	mm
Magnet material		ceramic	
diameter		45	mm
mass		0,093	kg
Mass of loudspeaker		0,31	kg
Magnetic stray field according to DIN 45578 max		35	mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a screened magnet system.

Dimensions in mm

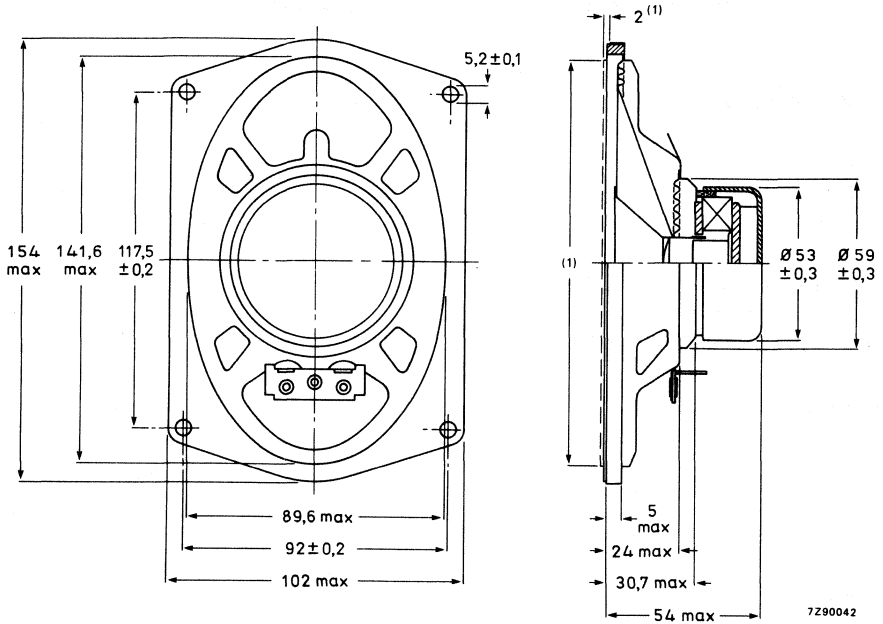


Fig. 1.

(1) Recommended baffle hole (oval of 141 mm x 89 mm) and clearing depth (2 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46900/M4 catalogue number 2422 257 20431
- AD46900/M8 catalogue number 2422 257 20432
- AD46900/M15 catalogue number 2422 257 20433

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

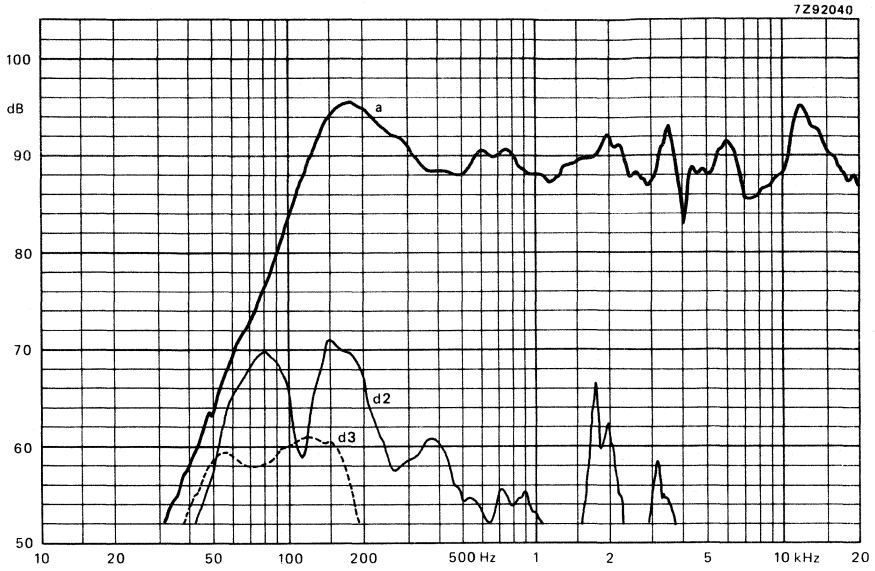


Fig. 2.

4 x 6 inch FULL RANGE LOUDSPEAKER

TECHNICAL DATA

	version		
	X8	X15	X25
Rated impedance	8	15	25 Ω
Voice coil resistance	7	13	22 Ω
Resonance frequency		130	Hz
Power handling capacity, measured without filter, loudspeaker unmounted		6	W
Maximum power on loudspeaker		12	W
Operating power (sound level 90 dB, 1 m)		1	W
Sweep voltage (70 to 20 000 Hz)	4,9	6	8,7 V
Filter		none	
Energy in air gap		34,5	mJ
Flux density		0,95	T
Air-gap height		2,5	mm
Voice coil height	4,3	4,2	5 mm
Core diameter		14,5	mm
Magnet material		ceramic	
diameter		37	mm
mass		0,057	kg
Mass of loudspeaker	0,2	0,2	0,2 kg
Magnetic stray field according to DIN 45578 max		35	mT

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a screened magnet system and a paper cone with a treated surround.

Dimensions in mm

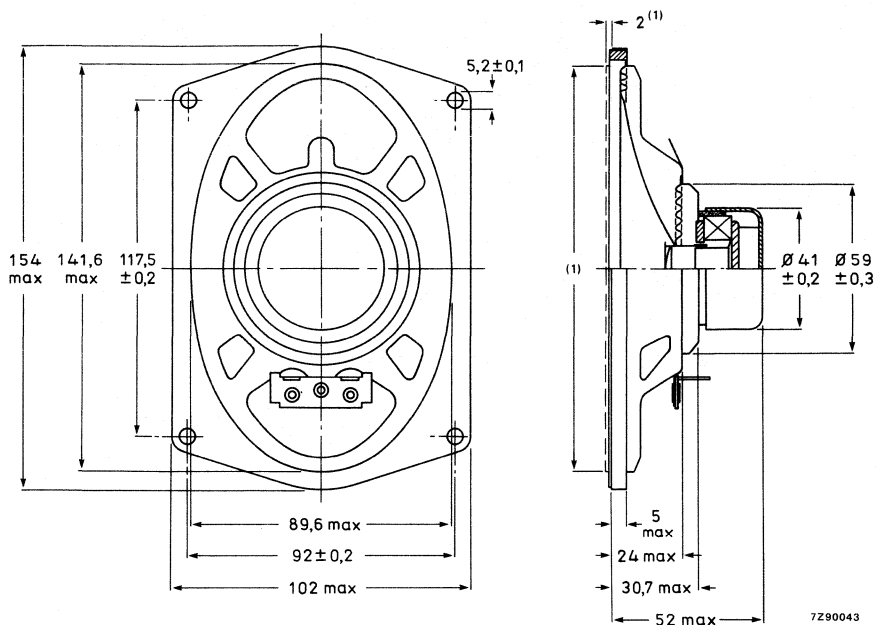


Fig. 1.

(1) Recommended baffle hole (oval of 141 mm x 89 mm) and clearing depth (2 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD46951/X8 catalogue number 2422 257 20426
- AD46951/X15 catalogue number 2422 257 20427
- AD46951/X25 catalogue number 2422 257 20428

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

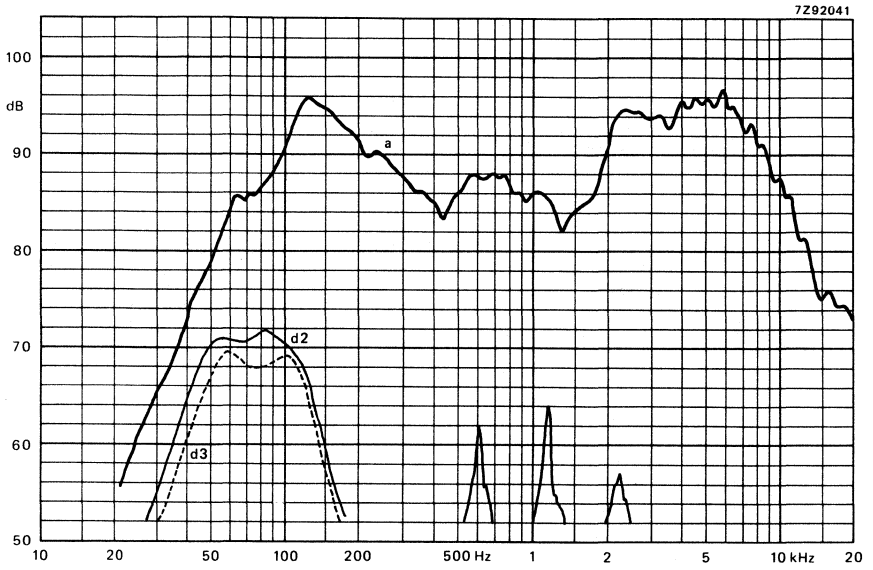


Fig. 2.

5 inch HIGH POWER SQUAWKER LOUDSPEAKER

APPLICATION

For the reproduction of audio frequencies from 400 to 5000 Hz with very low distortion in multi-way high-fidelity loudspeaker systems in accordance with DIN 45500. The loudspeaker has an excellent spherical radiation pattern.

TECHNICAL DATA

	version	
	Sq4	Sq8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	7 Ω
Rated frequency range	400 to 5000 Hz	
Resonance frequency	260 Hz	
Power handling capacity of system, measured with filter:		
72 μ F – 2,1 mH	20	W
36 μ F – 4,5 mH		20 W
Operating power	4 W	
Sweep voltage, frequency range: 400 – 5000 Hz, high-pass filter:		
72 μ F – 2,1 mH	4	V
36 μ F – 4,5 mH		5,6 V
Energy in air gap	140	mJ
Flux density	0,93	T
Air-gap height	5	mm
Voice coil height	6,8	mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	53	mm
mass	0,23	kg
Mass of loudspeaker	0,7	kg

The loudspeaker has a paper cone, a textile surround and a sealed pot; no acoustic isolation required. Two tinned 2,8 mm (0,11 inch) tag connectors permit connection to the loudspeaker by plugging or soldering.

Dimensions in mm

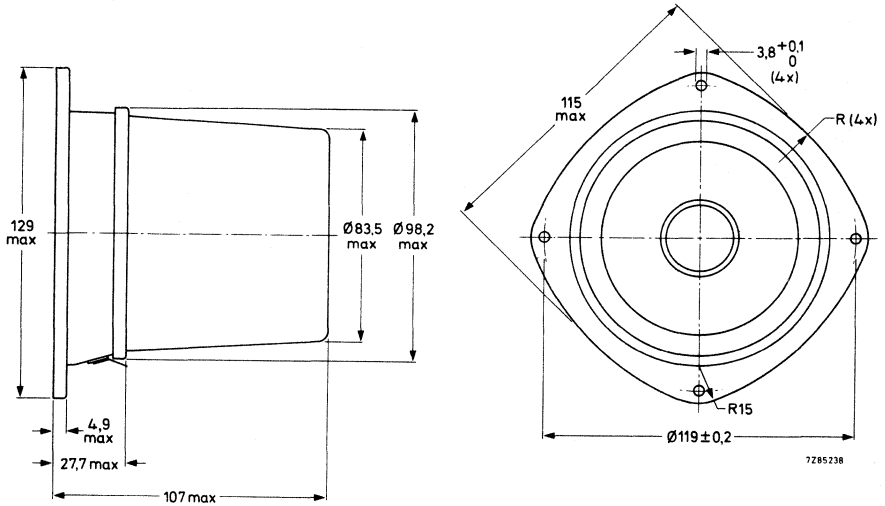


Fig. 1.

Baffle hole diameter minimum 100 mm.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD50600/Sq4, catalogue number 2422 257 45021

AD50600/Sq8, catalogue number 2422 257 45022

these numbers apply to bulk packed loudspeakers, minimum packing quantity 24 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle according to IEC 268-5 par. 4.4.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7Z83700

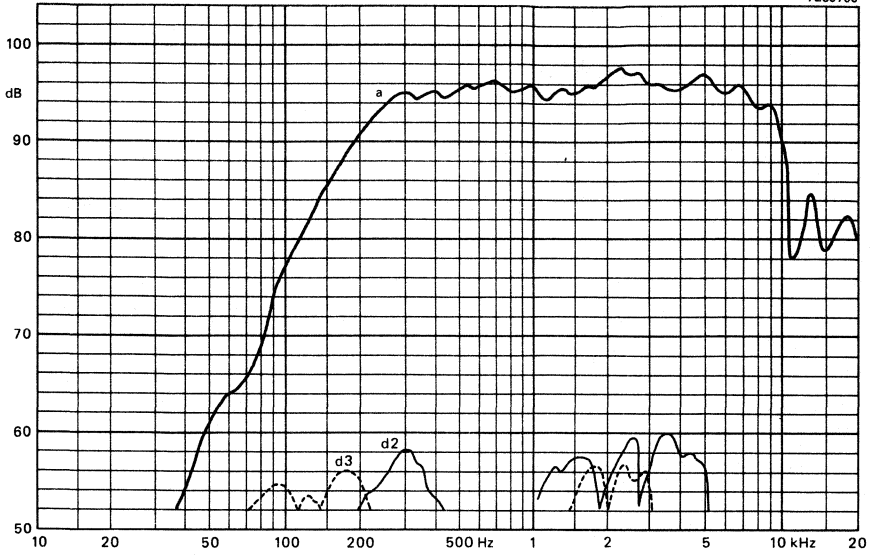


Fig. 2.

5¼ inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker for audio and video applications. AD50740 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25 Ω	
Voice coil resistance	3,5	7,1	13,7	22,8 Ω	
Rated frequency range		80 to 13 000		Hz	
Resonance frequency		130		Hz	
Power handling capacity, measured without filter, loudspeaker unmounted			3	W	
Maximum power on loudspeaker			5	W	
Operating power (sound level 90 dB, 0,5 m)			300	mW	
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V	
Filter		none			
Energy in air gap		12,7		mJ	
Flux density		0,74		T	
Air-gap height		2,5		mm	
Voice coil height	2,7	2,2	3,0	3,6 mm	
Core diameter		10			mm
Magnet material		ceramic			
square		28,5		mm	
mass		0,018		kg	
Mass of loudspeaker		0,088		kg	

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

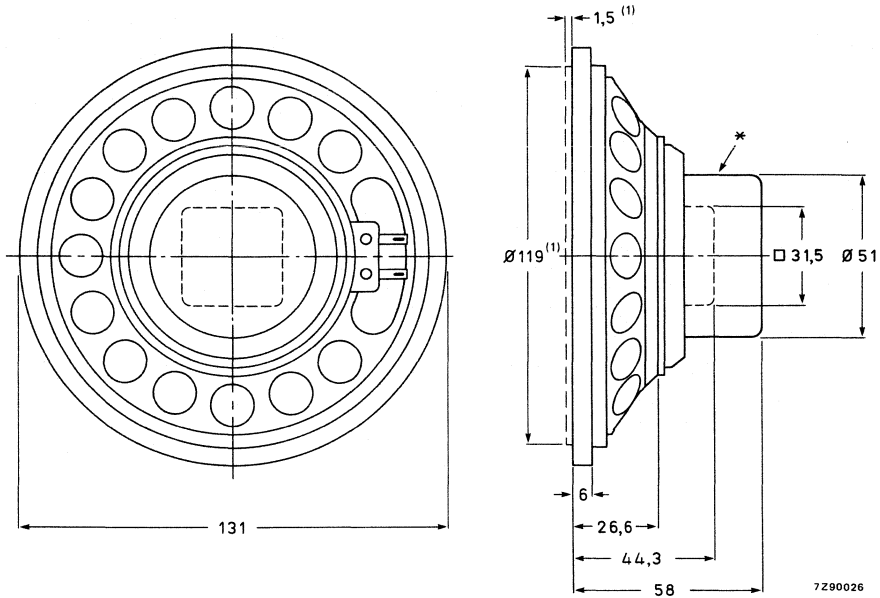


Fig. 1.

* Screening for AD50740/X only.

(1) Recommended baffle opening (ϕ 119 mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: 119 mm diameter.

AVAILABLE VERSIONS

- AD50720/X4 catalogue number 2403 257 25121
- AD50720/X8 catalogue number 2403 257 25122
- AD50720/X15 catalogue number 2403 257 25123
- AD50720/X25 catalogue number 2403 257 25124

- AD50740/X4 catalogue number 2403 257 25221
- AD50740/X8 catalogue number 2403 257 25222
- AD50740/X15 catalogue number 2403 257 25223
- AD50740/X25 catalogue number 2403 257 25224

These numbers are for bulk-packed loudspeakers.

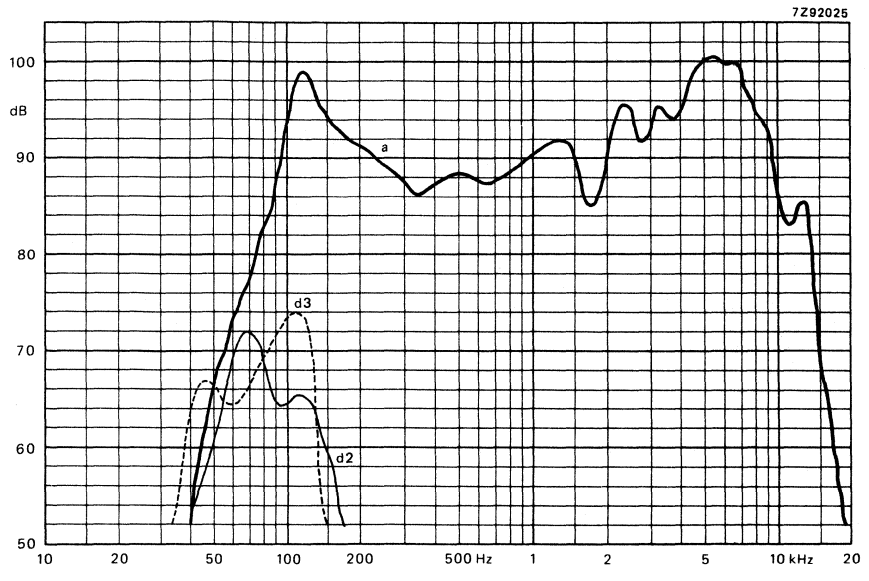


Fig. 2.

5¼ inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker for audio and video applications. AD50745 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	80 to 13 000				Hz
Resonance frequency	130				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	300				mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1	V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD50725	90				g
AD50745	110				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeaker has a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request.



Dimensions in mm

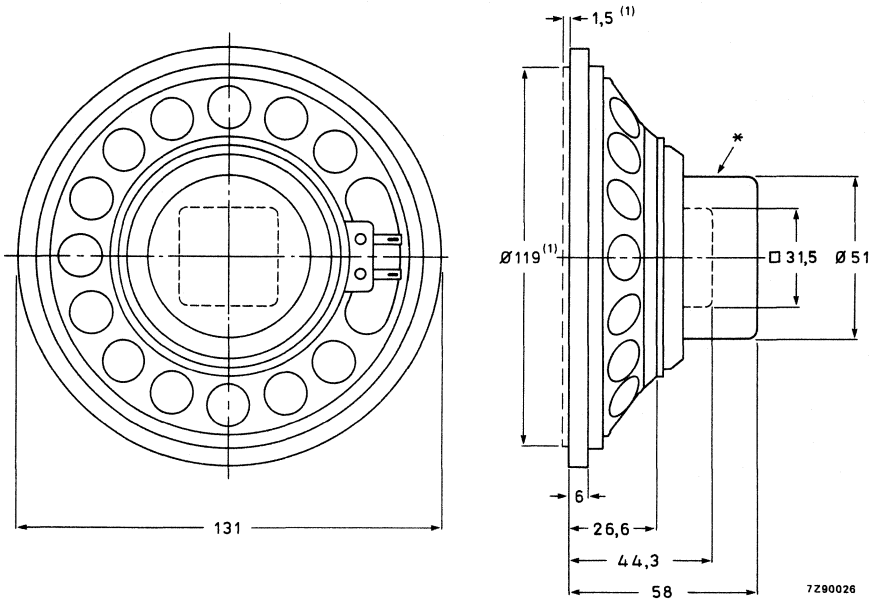


Fig. 1.

* Screening for AD70745/X only.

(1) Recommended baffle opening ($\phi 142$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD50725/X4	catalogue number 2403 257 55121
AD50725/X8	catalogue number 2403 257 55122
AD50725/X15	catalogue number 2403 257 55123
AD50724/X25	catalogue number 2403 257 55124
AD50745/X4	catalogue number 2403 257 55221
AD50745/X8	catalogue number 2403 257 55222
AD50745/X15	catalogue number 2403 257 55223
AD50745/X25	catalogue number 2403 257 55224

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

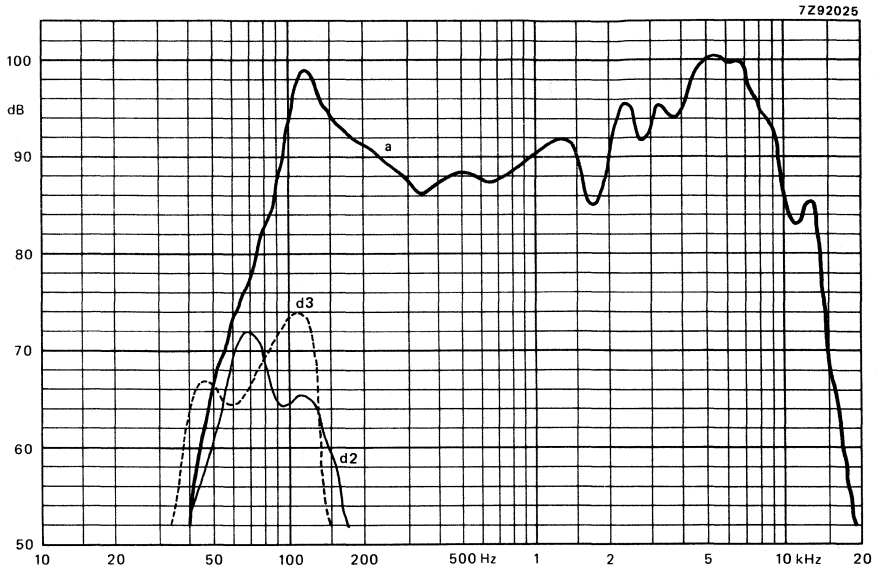


Fig. 2.

5 inch FULL RANGE LOUDSPEAKERS

TECHNICAL DATA

	version				
	X4	X8	M4	M8	
Rated impedance	4	8	4	8	Ω
Voice coil resistance	3,2	7	3,2	7	Ω
Resonance frequency			140		Hz
Power handling capacity, measured without filter, loudspeaker unmounted			6		W
Maximum power on loudspeaker			10		W
Sweep voltage (80 to 20 000 Hz)	3,4	4,9	4	4,9	V
Filter			none		
Characteristic sensitivity			91		dB/W/m
Energy in air gap			55		mJ
Flux density			1		T
Air-gap height			3		mm
Voice coil height	4	4,5	4	4,5	mm
Core diameter			18		mm
Magnet material			ceramic		
→ diameter			53		mm
mass			0,1		kg
Mass of loudspeaker			0,26		kg

Connections is by 2,8 mm (0,11 inch) tag connectors or by soldering. The M-versions have a double cone.

Dimensions in mm

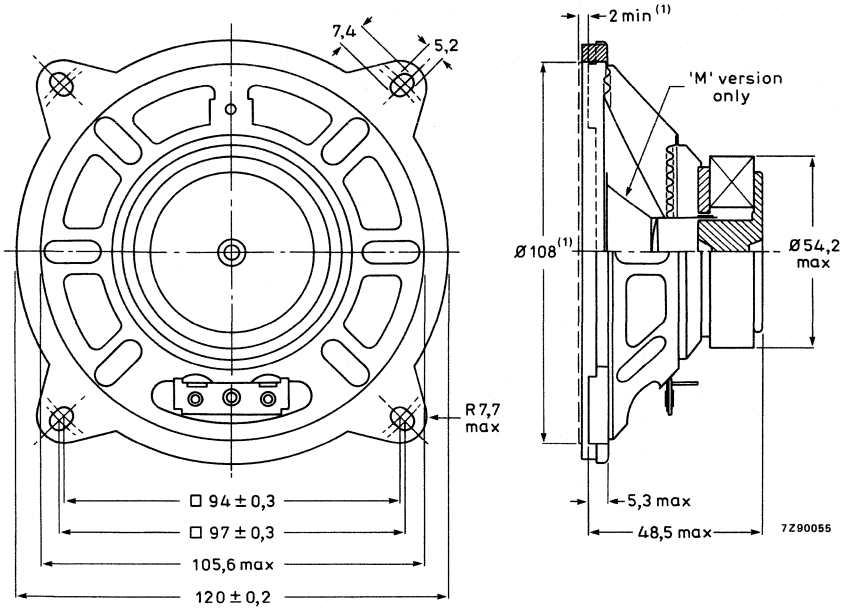


Fig. 1.

(1) Recommended baffle hole (ϕ 108 mm) and mounting clearance (2 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD50800/X4 catalogue number 2422 257 25121
- AD50800/X8 catalogue number 2422 257 25122
- AD50800/M4 catalogue number 2422 257 25125
- AD50800/M8 catalogue number 2422 257 25126

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.
 Curve a: Sound pressure.
 Curves d2 and d3: 2nd and 3rd harmonic distortion.

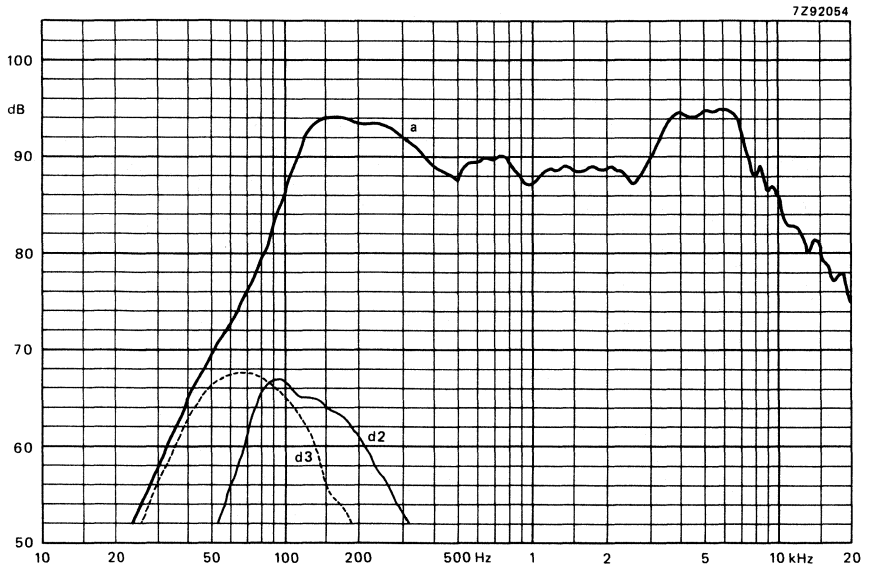


Fig. 2a AD50800/X.

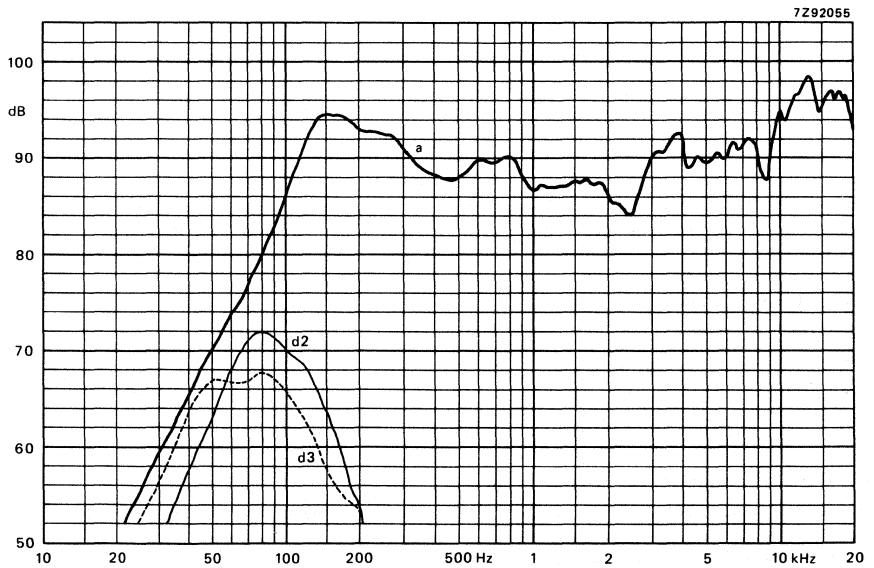


Fig. 2b AD50800/M.

5 inch HIGH POWER SQUAWKER LOUDSPEAKER

APPLICATION

For the reproduction of audio frequencies from 400 to 5000 Hz with very low distortion in multi-way high-fidelity loudspeaker systems in accordance with DIN 45500. The loudspeaker has an excellent spherical radiation pattern.

TECHNICAL DATA

	version	
	Sq4	Sq8
Rated impedance	4	8 Ω
Voice coil resistance	3,2	6,8 Ω
Rated frequency range	400 to 5000 Hz	
Resonance frequency	280 Hz	
Power handling capacity of system, measured with filter:		
72 μ F – 2,1 mH	15	W
36 μ F – 4,5 mH		15 W
Operating power	6	W
Sweep voltage, frequency range: 400 – 5000 Hz, high-pass filter:		
72 μ F – 2,1 mH	5	V
36 μ F – 4,5 mH		6,9 V
Energy in air gap	55	mJ
Flux density	0,93	T
Air-gap height	3	mm
Voice coil height	4,4	mm
Core diameter	18	mm
Magnet material	ceramic	
diameter	53	mm
mass	0,1	kg
Mass of loudspeaker	0,4	kg

The loudspeaker has a paper cone, a textile surround and a sealed pot; no acoustic isolation required. Two tinned 2,8 mm (0,11 inch) tag connectors permit connection to the loudspeaker by plugging or soldering.

Dimensions in mm

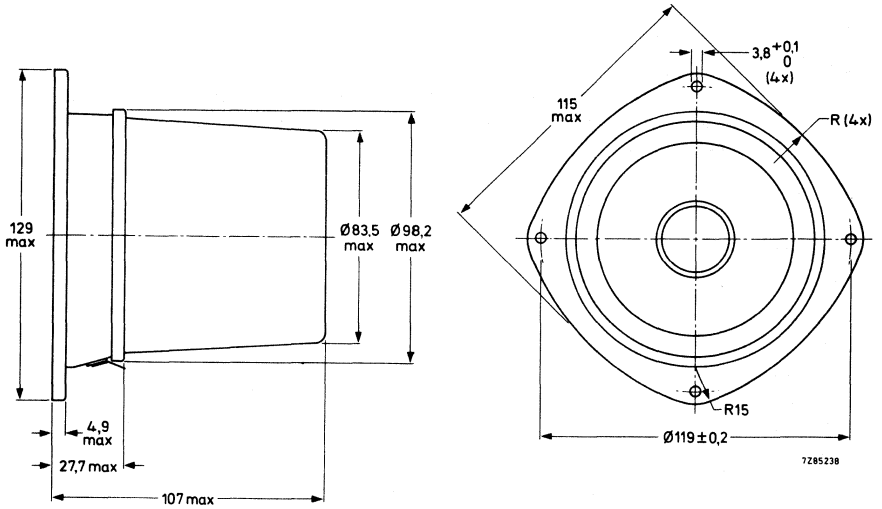


Fig. 1.

Baffle hole diameter minimum 100 mm.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD50800/Sq4, catalogue number 2422 257 45121

AD50800/Sq8, catalogue number 2422 257 45122

these numbers apply to bulk packed loudspeakers, minimum packing quantity 24 per unit.

FREQUENCY RESPONSE CURVE (See Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted on IEC baffle according to IEC 268-5 par. 4-4.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

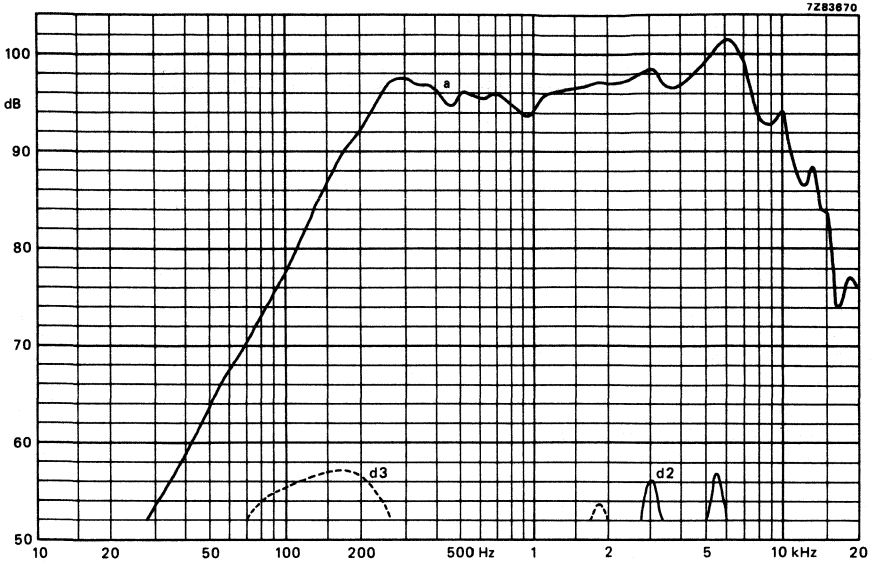


Fig. 2.

5¼ inch FULL RANGE LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: textile

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	up to 20 000 Hz
Sensitivity	91 dB
Resonance frequency	90 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	15 W
Max. power on loudspeaker	25 W
Operating power (sound level 96 dB, 1 m)	3,5 W
Sweep voltage (60 to 20 000 Hz)	5,5 V
Filter	none
Energy in air gap	78 mJ
Flux density	1,15 T
Air-gap height	3 mm
Voice coil height	4,2 mm
Rated core diameter	18 mm
Magnet material	ceramic
diameter	60 mm
mass	0,229 kg
Mass of loudspeaker	0,357 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

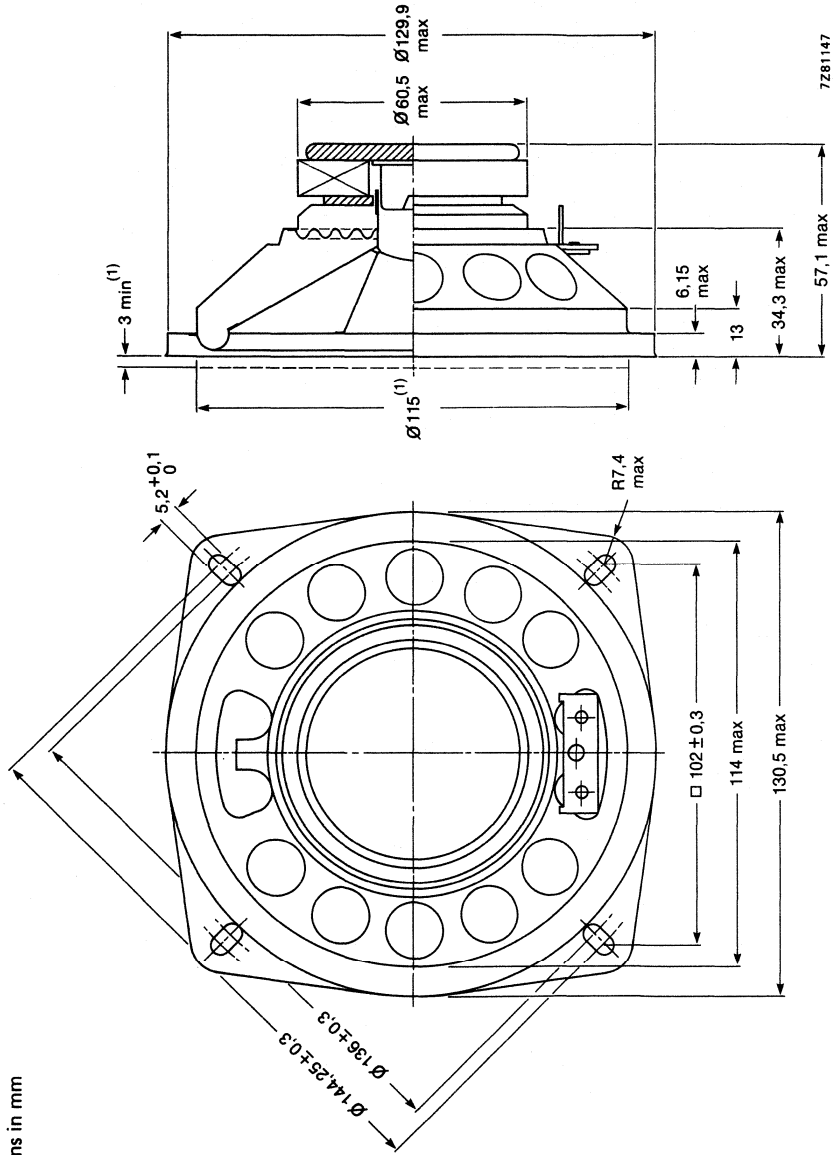


Fig. 1.

One tag has a + mark to facilitate phase matching.

Dimensions in mm

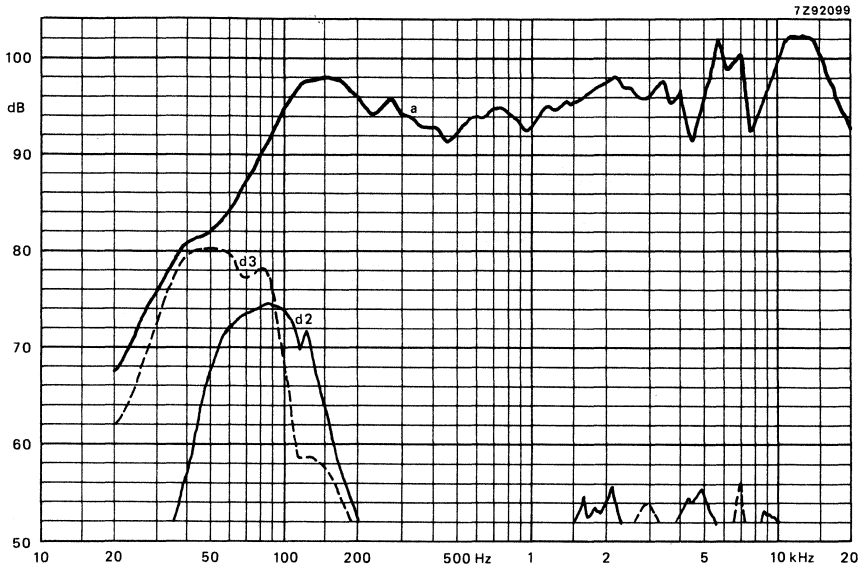


Fig. 2.

AVAILABLE VERSIONS

AD51410/M4 catalogue number 2422 257 45521 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

5¼ inch WOOFER LOUDSPEAKER

- frame: metal
- cone: paper
- rim: foam
- screened magnet
- aluminium coil former
- for video applications

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,8 Ω
Rated frequency range	100 to 4000 Hz
Resonance frequency	70 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	20 W
Maximum power on loudspeaker, in bass-reflex box of 10 l	40 W
Operating power (sound level 87 dB, 1m)	W
Sweep voltage (50 to 1000 Hz)	5 V
Filter	none
Energy in air gap	127,3 mJ
Flux density	0,8 T
Air-gap height	5 mm
Voice coil height	10 mm
Core diameter	25 mm
Magnet material	ceramic
diameter	60 mm
mass	0,213 kg
Mass of loudspeaker	0,630 kg
Magnetic stray field according to DIN 45578	max. 0,35 mT
Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.	

Dimensions in mm

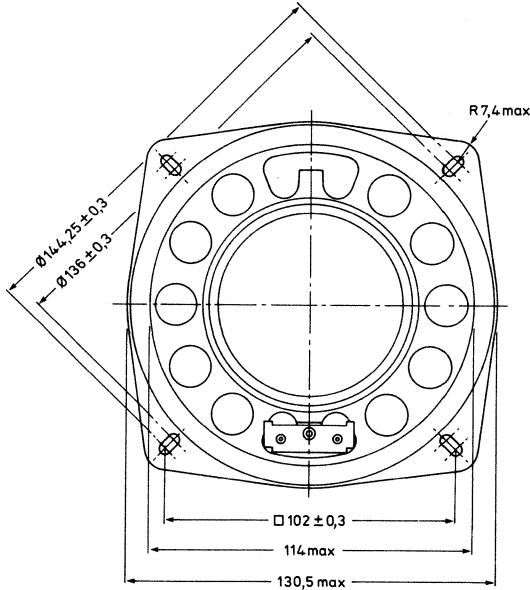


Fig. 1.

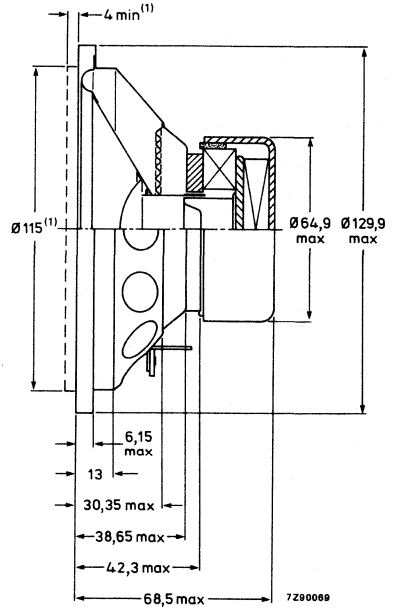


Fig. 2.

AVAILABLE VERSION

AD51502/W4M catalogue number 2422 257 35933. This number is for bulk packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

- (1) Recommended baffle opening (ϕ 115 mm) and mounting clearance (4 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

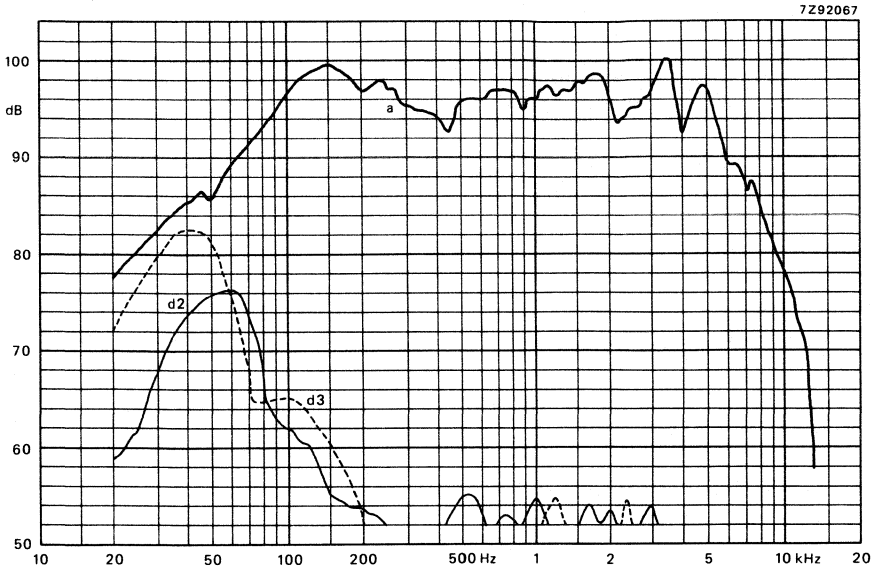


Fig. 3.

5¼ inch HIGH POWER WOOFER LOUDSPEAKER

TECHNICAL DATA

	version	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,8	7 Ω
Rated frequency range	60 – 9000	Hz
Resonance frequency	62	Hz
Power handling capacity, measured in a sealed box of 4 l, with 50 g damping material	30	W
Maximum power on loudspeaker	50	W
Operating power (sound level 96 dB, 1 m)	5	W
Sweep voltage (35 to 6000 Hz)	4,9	7 V
Filter	none	
Energy in air gap	135	mJ
Flux density	0,38	0,93 T
Air-gap height	5	mm
Voice coil height	10	mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	72	mm
mass	0,26	kg
Mass of loudspeaker	0,64	kg

The loudspeaker has a paper cone and a foam surround, paper dust cap and an aluminium coil former. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

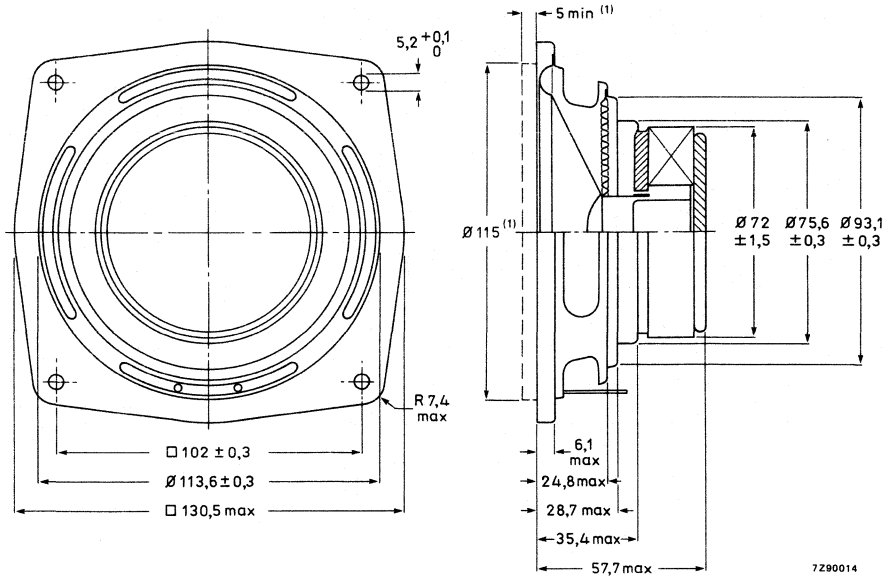


Fig. 1.

(1) Recommended baffle hole ($\varnothing 115 \text{ mm}$) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD51610/W4 catalogue number 2422 257 35821 }
 AD51610/W8 catalogue number 2422 257 35822 } These numbers are for bulk-packed loudspeakers.

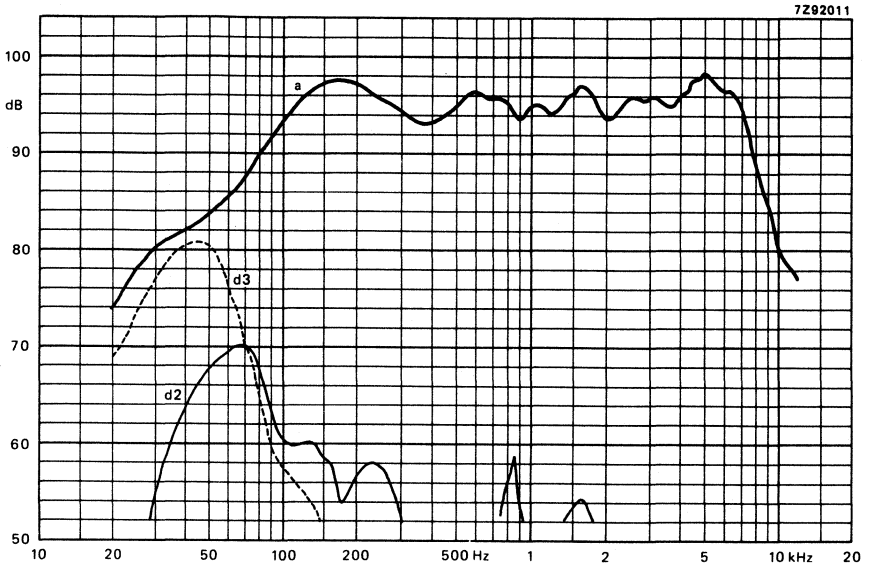


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

5¼ inch WOOFER LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: textile
- dust cap: metallook
- recommended volume: 5 litre box

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	up to Hz
Sensitivity	90 dB
Resonance frequency	85 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	15 W
Max. power on loudspeaker	25 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (40 to 1000 Hz)	5 V
Filter	none
Energy in air gap	53 mJ
Flux density	0,98 T
Air-gap height	3 mm
Voice coil height	6 mm
Rated core diameter	18 mm
Magnet material	ceramic
diameter	53 mm
mass	0,190 kg
Mass of loudspeaker	0,307 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

7294563

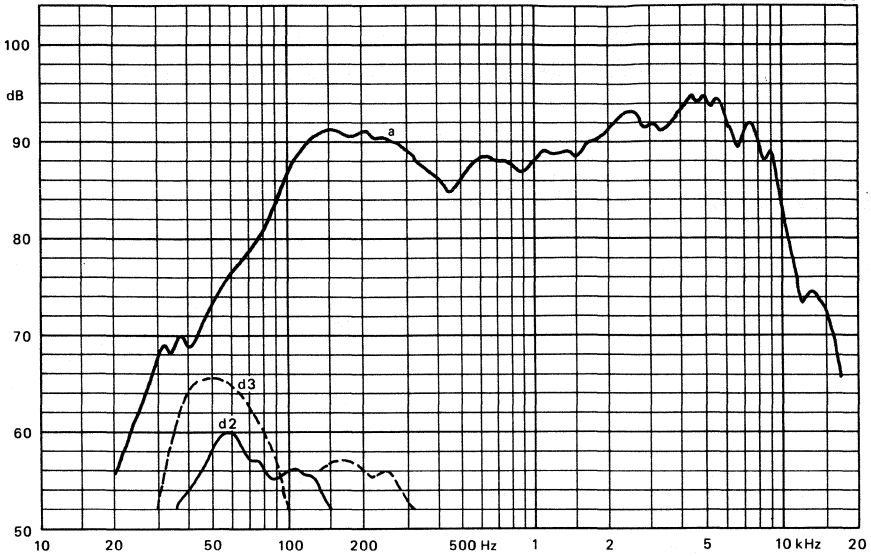


Fig. 2.

AVAILABLE VERSIONS

AD51800/W4 catalogue number 2422 257 35826 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

5¼ inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker with 4 mounting lugs for audio and video applications. AD55740 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range		80 to 13 000		Hz
Resonance frequency		130		Hz
Power handling capacity, measured without filter, loudspeaker unmounted		3		W
Maximum power on loudspeaker		5		W
Operating power (sound level 90 dB, 1 m)		300		mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter		none		
Energy in air gap		12,7		mJ
Flux density		0,74		T
Air-gap height		2,5		mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter		10		mm
Magnet material		ceramic		
square		28,5		mm
mass		0,018		kg
Mass of loudspeaker		0,088		kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

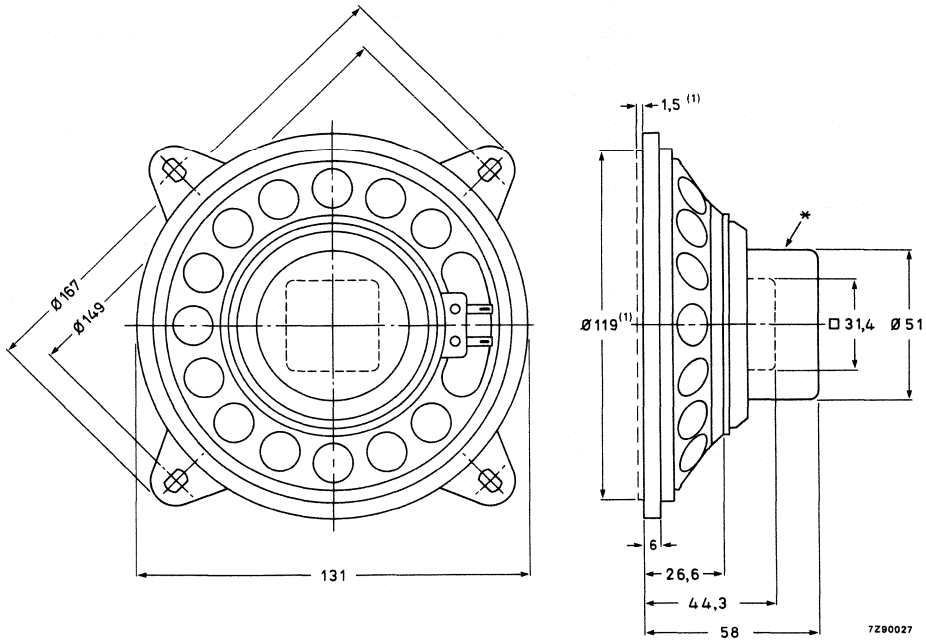


Fig. 1.

* Screening for AD55740/X only.

(1) Recommended baffle hole ($\varnothing 119$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: 119 mm diameter.

AVAILABLE VERSIONS

- | | |
|-------------|---------------------------------|
| AD55720/X4 | catalogue number 2403 257 25921 |
| AD55720/X8 | catalogue number 2403 257 25922 |
| AD55720/X15 | catalogue number 2403 257 25923 |
| AD55720/X25 | catalogue number 2403 257 25924 |
| AD55740/X4 | catalogue number 2403 257 25821 |
| AD55740/X8 | catalogue number 2403 257 25822 |
| AD55740/X15 | catalogue number 2403 257 25823 |
| AD55740/X25 | catalogue number 2403 257 25824 |

} These number are for bulk-packed loudspeakers.

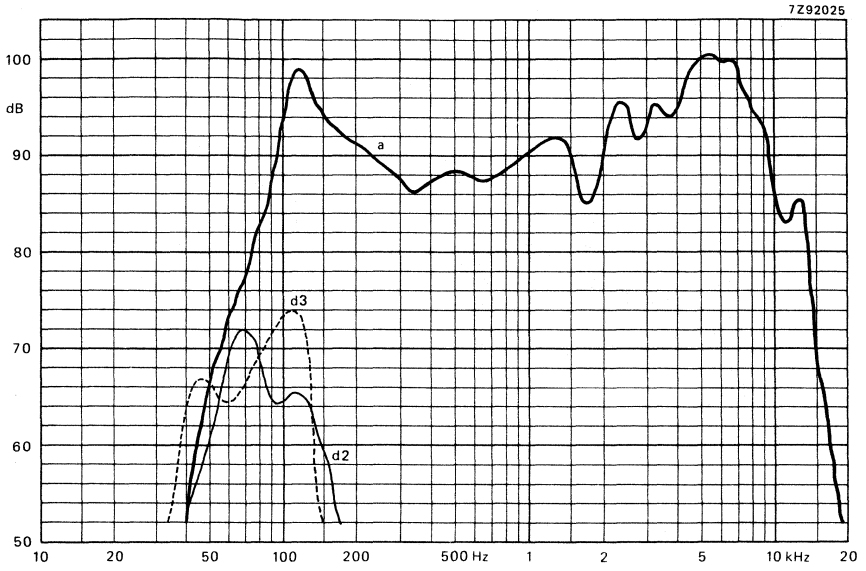


Fig. 2.

5¼ inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker with 4 mounting lugs for audio and video applications. AD55745 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	80 to 13 000			Hz
Resonance frequency	130			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5			W
Maximum power on loudspeaker	7			W
Operating power (sound level 90 dB, 0,5 m)	300			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square mass	28,5			mm
	18			g
Mass of loudspeaker				
AD55725	50			g
AD55745	110			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeaker has a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request.



AD55725/X.
AD55745/X.

Dimensions in mm

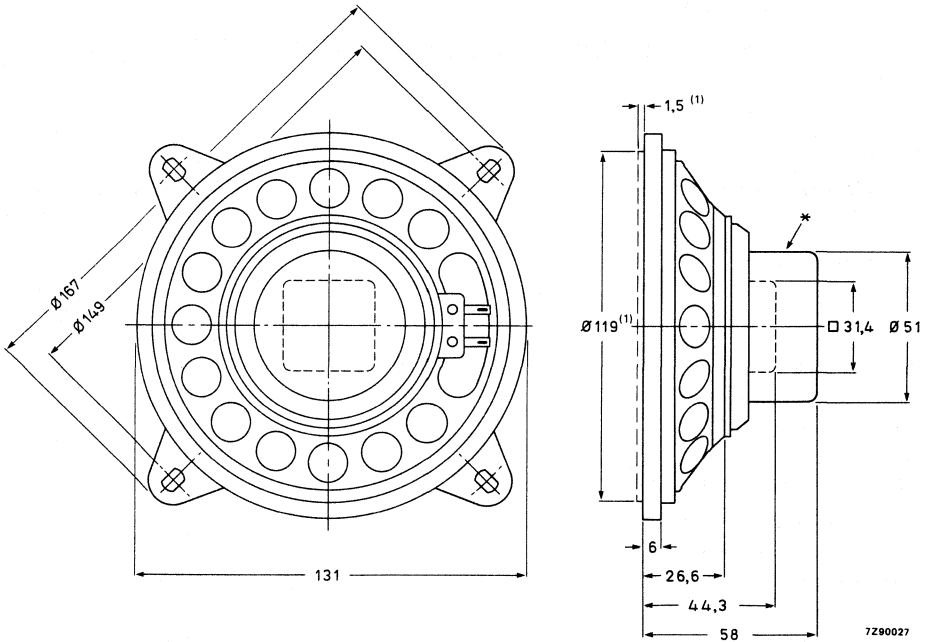


Fig. 1.

* Screening for AD55745 only.

(1) Recommended baffle hole ($\phi 119$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity.

One tag has a red mark to facilitate phase matching. Recommended baffle hole: 119 mm diameter.

AVAILABLE VERSIONS

AD55725/X4	catalogue number 2403 257 55921
AD55725/X8	catalogue number 2403 257 55922
AD55725/X15	catalogue number 2403 257 55923
AD55725/X25	catalogue number 2403 257 55924
AD55745/X4	catalogue number 2403 257 55821
AD55745/X8	catalogue number 2403 257 55822
AD55745/X15	catalogue number 2403 257 55823
AD55745/X25	catalogue number 2403 257 55824

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

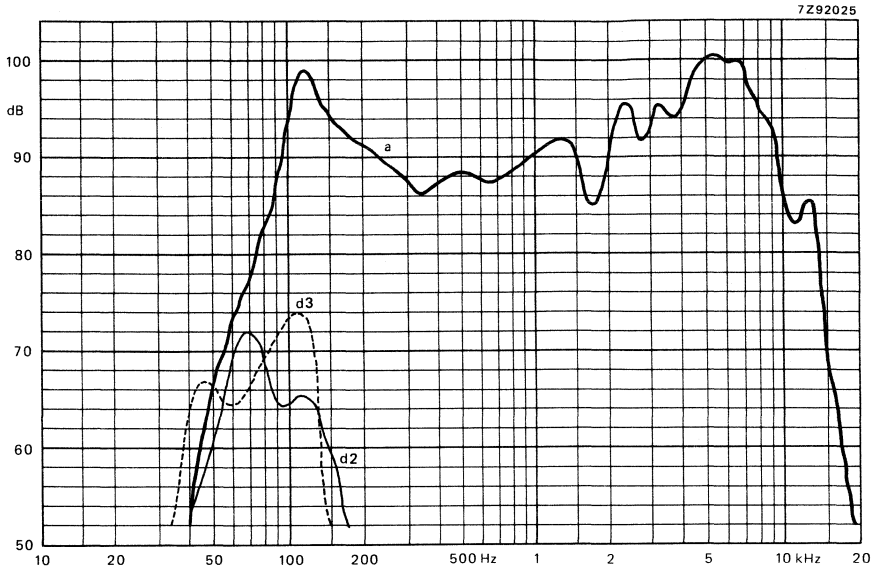


Fig. 2.

7 inch WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: textile
- application:
- gaskets: none
- magnetic compensation: none
- recommended enclosure: 15 litre

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,9 Ω
Rated frequency range	up to 8000 Hz
Resonance frequency	74 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	30 W
Max. power on loudspeaker	45 W
Operating power (sound level 96 dB, 1 m)	8 W
Sweep voltage (20 to 20 000 Hz)	5,5 V
Filter	none
Characteristic sensitivity	87 dB
Energy in air gap	75 mJ
Flux density	1,17 T
Force factor (Bxl) at 1A	3,7 Wb/m
Piston area	0,0123 m ²
Total moving mass	6,3 x 10 ⁻³ kg
Compliance, loudspeaker unmounted	0,81 x 10 ⁻³ m/N
Equivalent box volume	14,7 l
Quality factor, loudspeaker mounted in recommended volume	
mechanical	4,12
electrical	2,07
total	1,37
Air-gap height	3 mm
Air-gap length	0,845 mm
Voice coil height	6,5 mm
Rated coil diameter	18 mm
Magnet material	ceramic
diameter	60 mm
mass	0,15 kg
Mass of loudspeaker	0,39 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

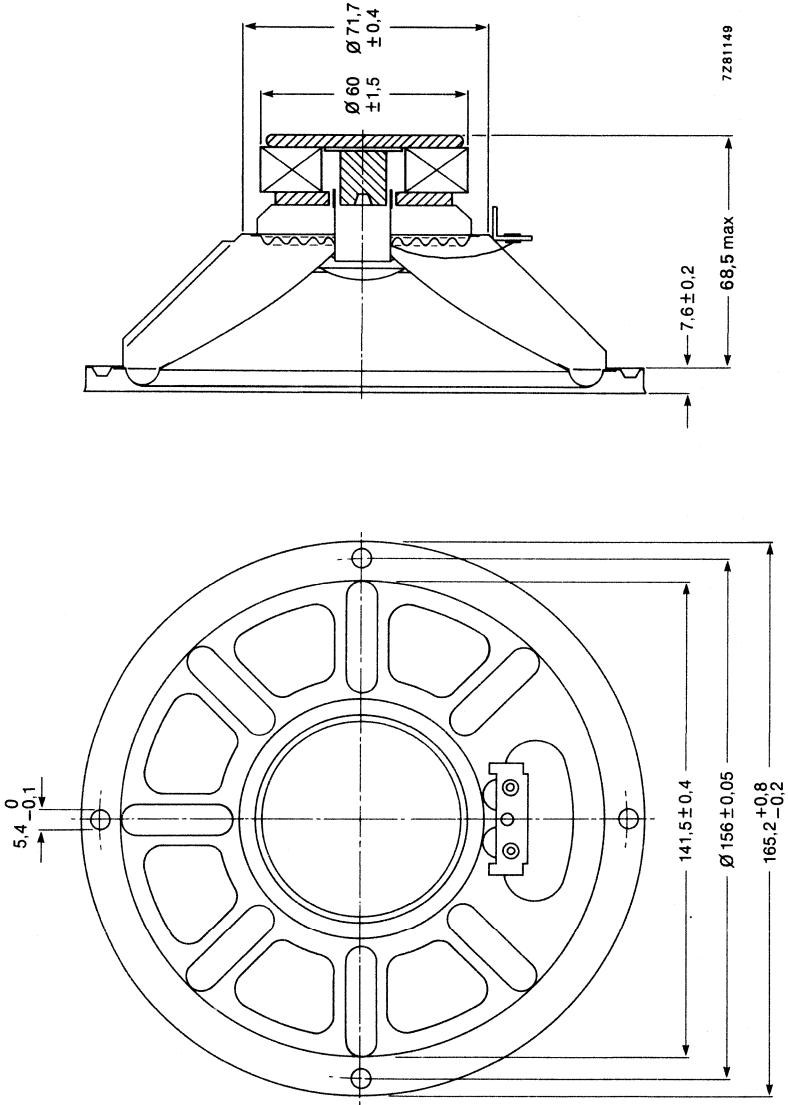


Fig. 1.

* Recommended baffle opening (ϕ 144 mm) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a mark to facilitate phase matching.

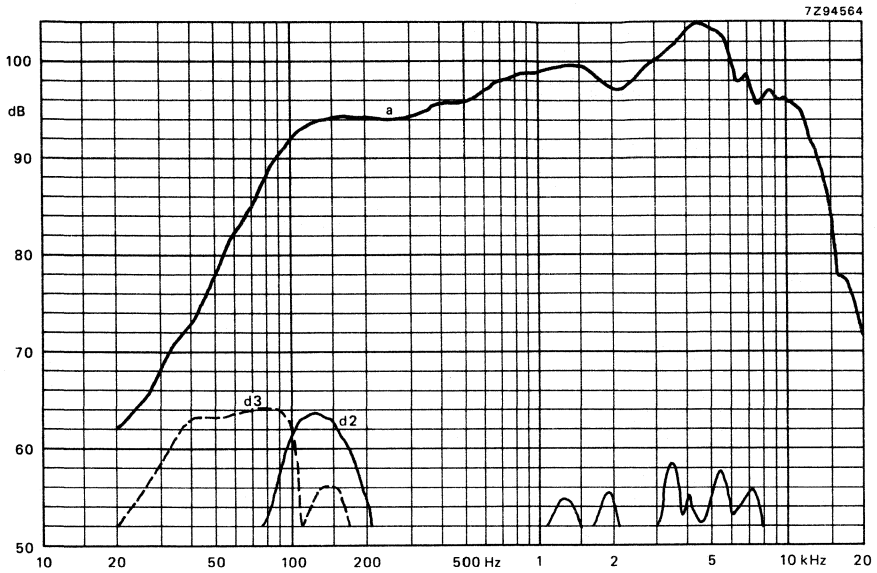


Fig. 2.

AVAILABLE VERSION

AD70400/W8. catalogue number 2422 257 27222 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7 inch WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: foam
- gaskets: none
- magnetic compensation: none
- recommended enclosure: 15 litre

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,5 Ω
Rated frequency range	up to 5000 Hz
Resonance frequency	48 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, 100 h continuous	40 W
Max. power on loudspeaker	80 W
Operating power (sound level 96 dB, 1 m)	10 W
Sweep voltage (20 to 6000 Hz)	6,3 V
Filter	none
Characteristic sensitivity	86 dB
Energy in air gap	137 mJ
Flux density	0,72 T
Force factor (Bxl) at 1 A	4,7 Wb/m
Piston area	133 cm ²
Total moving mass	13 g
Compliance, loudspeaker unmounted	0,84 x 10 ⁻³ m/N
Equivalent box volume	17,8 l
Quality factor, loudspeaker unmounted	
mechanical	4,2
electrical	1,16
total	1,15
Air-gap height	5 mm
Air-gap length	1,6 mm
Voice coil height	7 mm
Rated coil diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,24 kg
Mass of loudspeaker	0,75 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

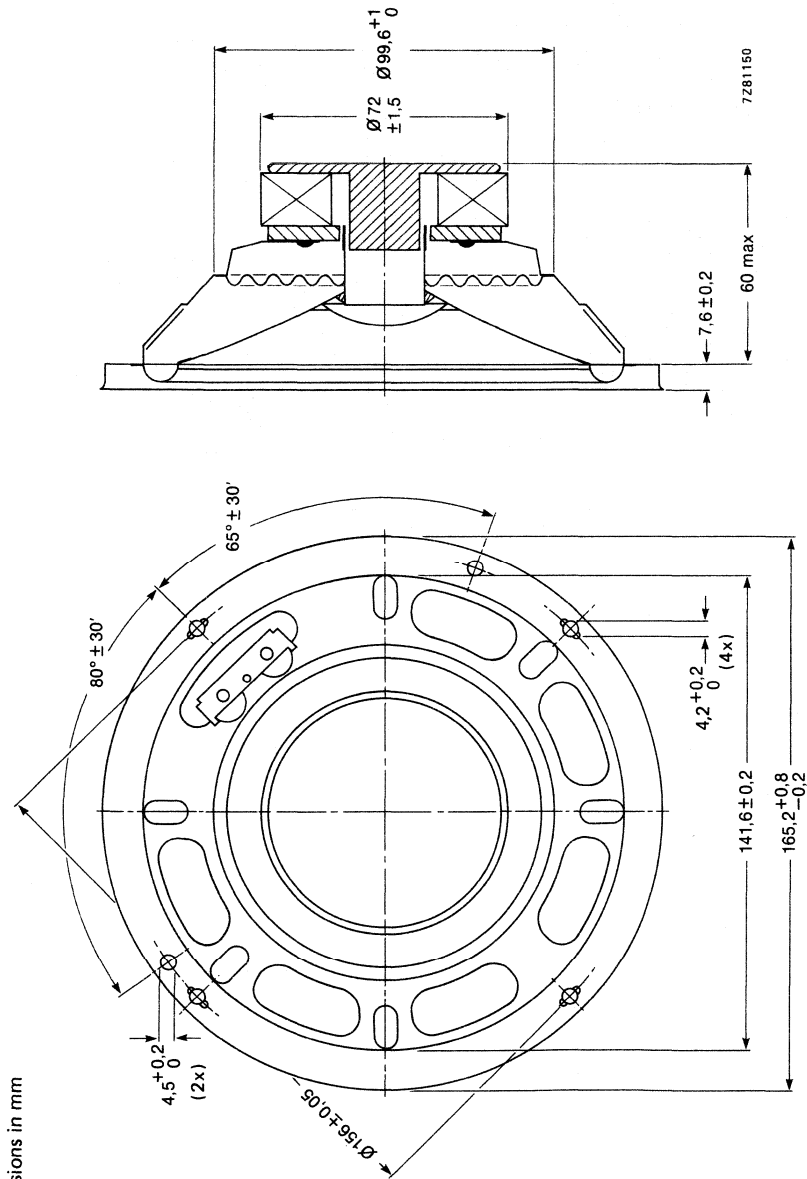


Fig. 1.

Recommended baffle opening ($\phi 144 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a mark to facilitate phase matching.

Dimensions in mm

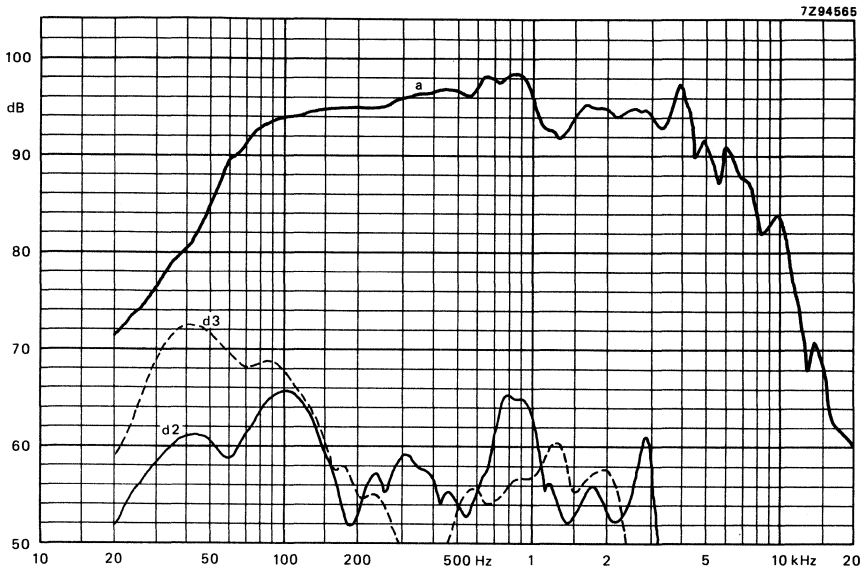


Fig. 2.

AVAILABLE VERSION

AD70604/W4. catalogue number 2422 257 47133 This number is for bulk packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7 inch HIGH EFFICIENCY LOUDSPEAKER

- frame: steel, black
- cone: paper, black
- surround: textile

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,2 Ω
Rated frequency range	up to 20 000 Hz
Sensitivity	91 dB
Resonance frequency	60 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	15 W
Max. power on loudspeaker	25 W
Operating power (sound level 96 dB, 1 m)	3 W
Sweep voltage (35 to 20 000 Hz)	5,5 V
Filter	none
Energy in air gap	127 mJ
Flux density	0,87 T
Air-gap height	5 mm
Voice coil height	6 mm
Rated core diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,26 kg
Mass of loudspeaker	0,652 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

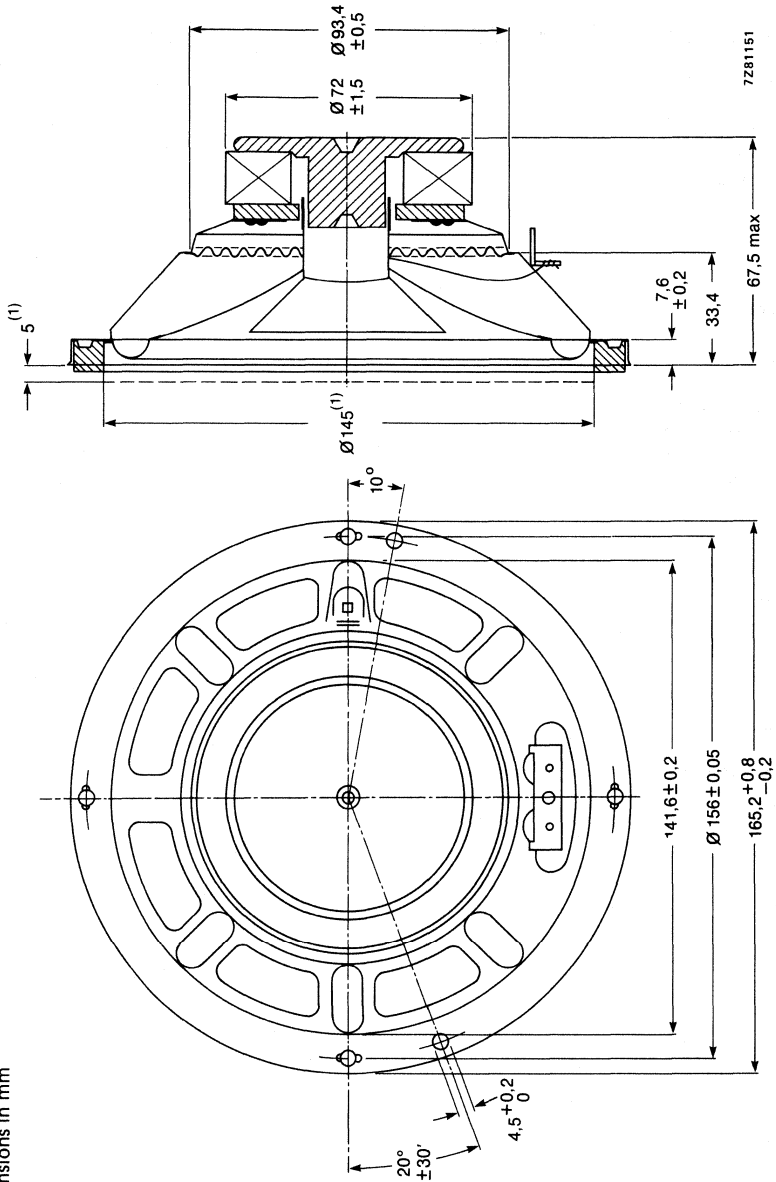


Fig. 1.

Recommended baffle opening ($\varnothing 145 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a + mark to facilitate phase matching.

7294566

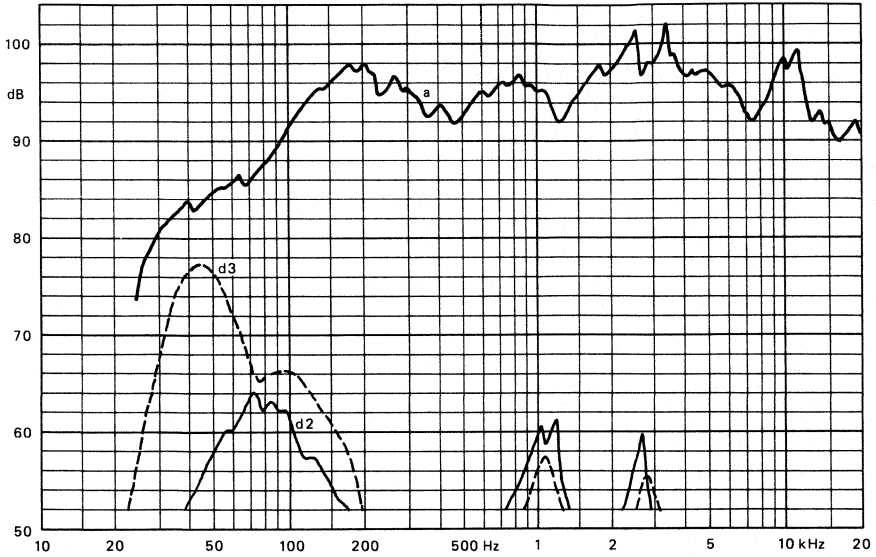


Fig. 2.

AVAILABLE VERSIONS

AD70631/M4 catalogue number 2422 257 47126 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7 inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker for audio and video applications. AD70740 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	70 to 13 000			Hz
Resonance frequency	100			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5			W
Operating power (sound level 90 dB, 1 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker	106			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

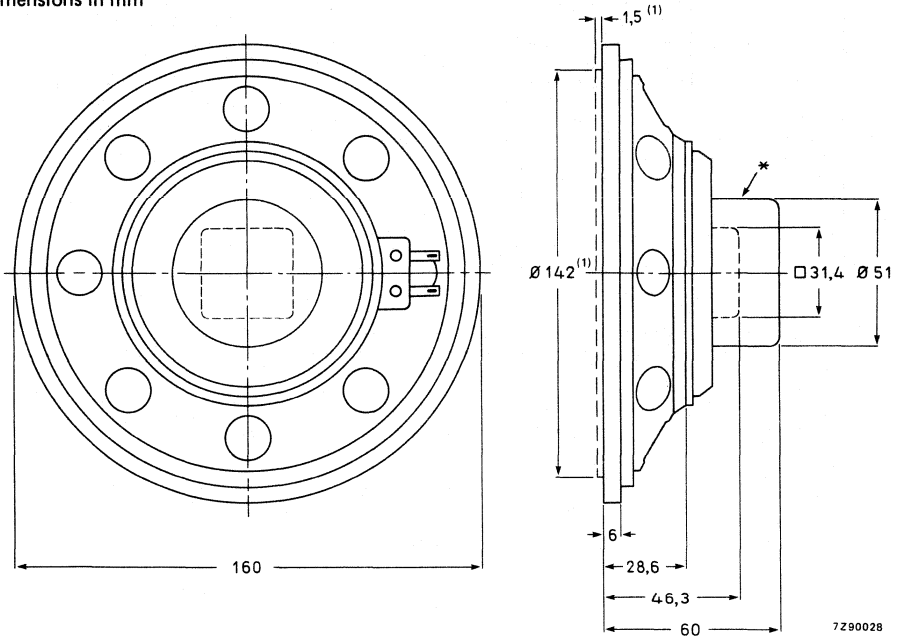


Fig. 1.

* Screening for AD70740/X only.

(1) Recommended baffle opening ($\varnothing 142$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD70720/X4 catalogue number 2403 257 27121
- AD70720/X8 catalogue number 2403 257 27122
- AD70720/X15 catalogue number 2403 257 27123
- AD70720/X25 catalogue number 2403 257 27124
- AD70740/X4 catalogue number 2403 257 27221
- AD70740/X8 catalogue number 2403 257 27222
- AD70740/X15 catalogue number 2403 257 27223
- AD70740/X25 catalogue number 2403 257 27224

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

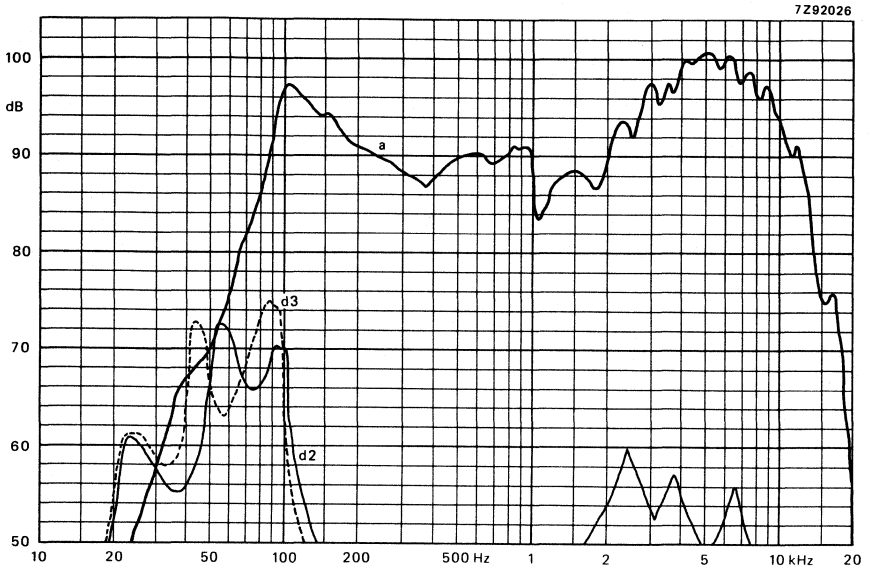


Fig. 2.

7 inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker for audio and video applications. AD70745 has a screened magnet system.

TECHNICAL DATA

	version				
	X4	X8	X15	X25	
Rated impedance	4	8	15	25	Ω
Voice coil resistance	3,5	7,1	13,7	22,8	Ω
Rated frequency range	70 to 13 000				Hz
Resonance frequency	100				Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5				W
Maximum power on loudspeaker	7				W
Operating power (sound level 90 dB, 0,5 m)	400				mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1	V
Filter	none				
Energy in air gap	12,7				mJ
Flux density	0,74				T
Air-gap height	2,5				mm
Voice coil height	2,7	2,2	3,0	3,6	mm
Core diameter	10				mm
Magnet material	ceramic				
square	28,5				mm
mass	18				g
Mass of loudspeaker					
AD70725	100				g
AD70745	120				g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeaker has a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request.



Dimensions in mm

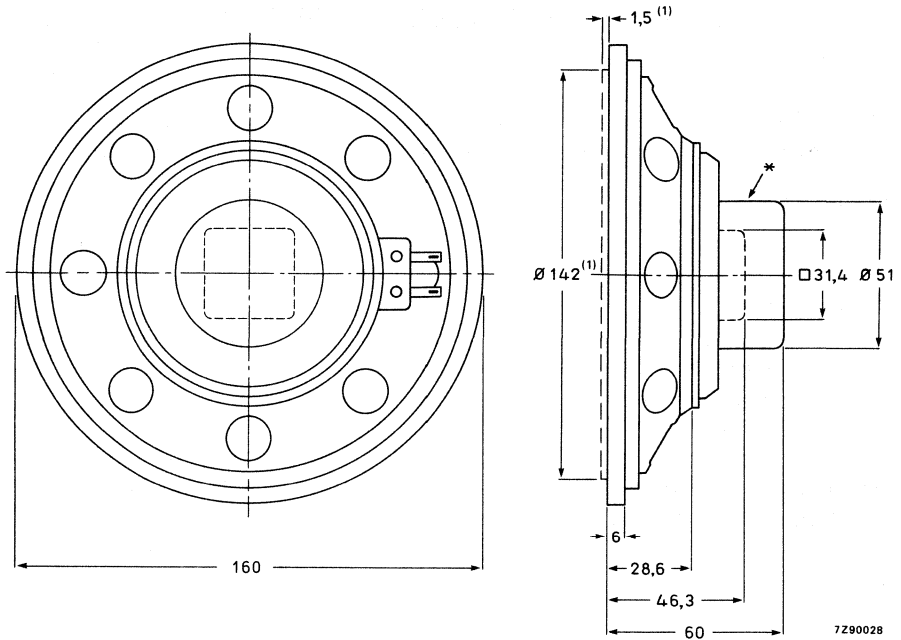


Fig. 1.

* Screening for AD70745/X only.

(1) Recommended baffle opening ($\varnothing 142$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD70725/X4	catalogue number 2403 257 57121	} These numbers are for bulk-packed loudspeakers
AD70725/X8	catalogue number 2403 257 57122	
AD70725/X15	catalogue number 2403 257 57123	
AD70725/X25	catalogue number 2403 257 57124	
AD70745/X4	catalogue number 2403 257 57221	
AD70745/X8	catalogue number 2403 257 57222	
AD70745/X15	catalogue number 2403 257 57223	
AD70745/X25	catalogue number 2403 257 57224	

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

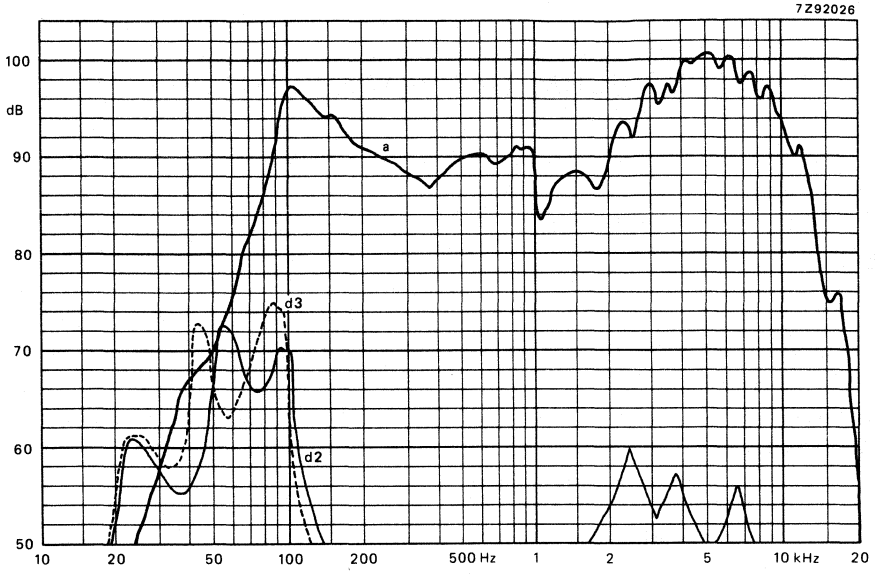


Fig. 2.

7 inch OCTAGONAL HIGH POWER LOUDSPEAKER

APPLICATION

A full range loudspeaker for all audio applications.

TECHNICAL DATA

	version			
	X4	X8	M4	M8
Rated impedance	4	8	4	8 Ω
Voice coil resistance	3,4	7	3,4	7 Ω
Rated frequency range	50 to 10 000		60 to 16 000 Hz	
Resonance frequency	105		100	105 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	12		13	W
Operating power (sound level 90 dB, 1 m)	0,7		0,75	0,65 W
Sweep voltage (50 to 20 000 Hz)	4,9	6,9	5,1	7,2 V
Energy in air gap	53		53	mJ
Flux density	0,98		0,98	T
Air-gap height	3		3	mm
Voice coil height	3,9	4,5	3,9	4,5 mm
Core diameter	18		18	mm
Magnet material	ceramic			
diameter	53		53	mm
mass	0,1		0,1	kg
Mass of loudspeaker	0,3		0,3	kg

The loudspeaker has a paper cone and a treated rim. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

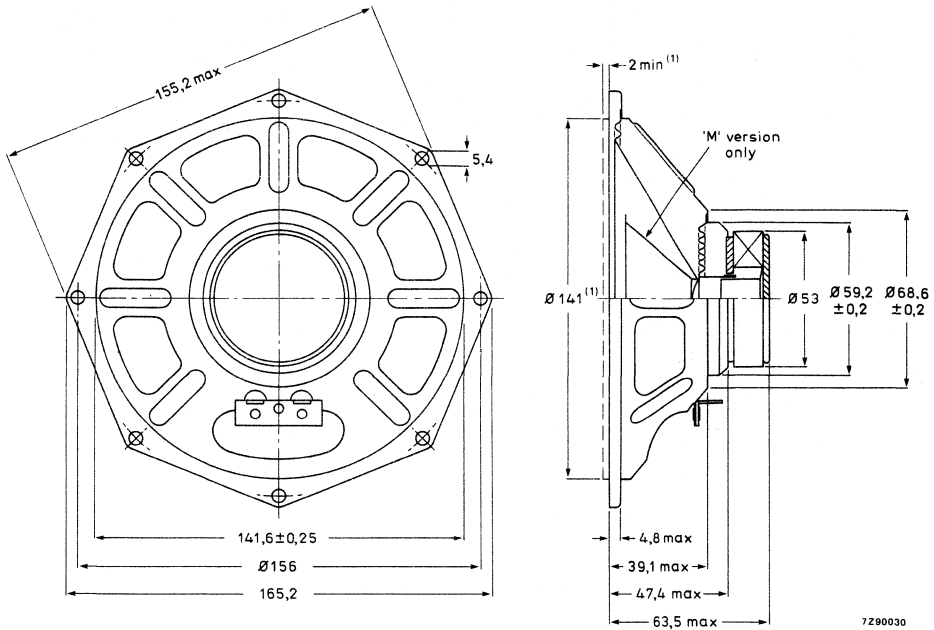


Fig. 1.

(1) Recommended baffle opening (ϕ 141 mm) and clearance depth (2 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS .

AD70800/X4	catalogue number 2422 257 47421	} These numbers are for bulk-packed loudspeakers.
AD70800/X8	catalogue number 2422 257 47422	
AD70800/M4	catalogue number 2422 257 47425	
AD70800/M8	catalogue number 2422 257 47426	

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

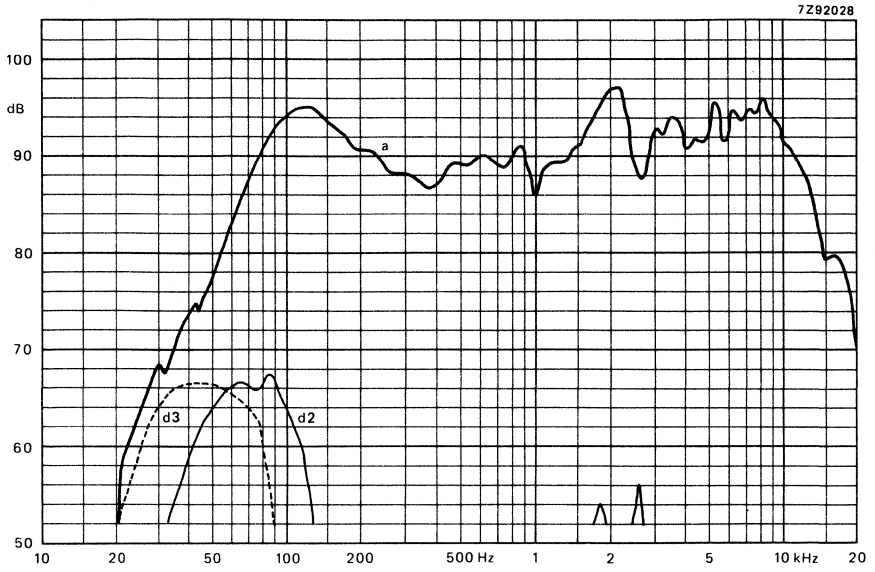


Fig. 2a AD70800/M.

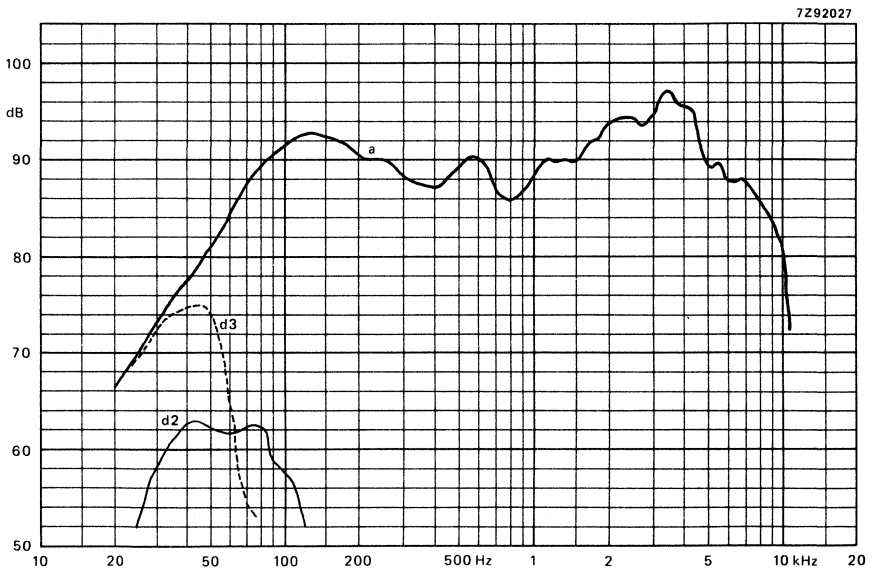


Fig. 2b AD70800/X.

7 inch WOOFER LOUDSPEAKER

economic version

- frame: zinc plated steel, yellow
- cone: paper, black
- surround: treated paper
- gaskets: foam, grey
- magnetic compensation: none
- recommended enclosure: 15 l

TECHNICAL DATA

	version	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,4	6,9 Ω
Rated frequency range	8000 Hz	
Resonance frequency	86 Hz	
Power handling capacity, measured without filter, loudspeaker unmounted	20	W
Maximum power on loudspeaker	35	W
Operating power (sound level 96 dB, 1 m)	8	W
Sweep voltage (20 to 20 000 Hz)	3,9	5,5 W
Filter	none	
Characteristic sensitivity	to be fixed dB	
Energy in air gap	53	mJ
Flux density	0,98	T
Force factor (Bxl) at 1A	2,63	2,9 Wb/m
Piston diameter	125 x 10 ⁻³ m	
Piston area	12,3 x 10 ⁻³ m ²	
Total moving mass	6,3 x 10 ⁻³ kg	
Compliance, loudspeaker unmounted	0,6 x 10 ⁻³ m/N	
Equivalent boxvolume	10,9 l	
Quality factor, loudspeaker mounted in recommended volume		
mechanical, Q _M	4,2	4,2
electrical, Q _E	2,0	3,4
total, Q _T	1,35	1,9
Air-gap height	3	mm
Air-gap length	0,845	mm
Voice coil height	6,5	mm
Rated coil diameter	18	mm
Magnet material	ceramic	
diameter	72	mm
mass	0,1	kg
Mass of loudspeaker	0,3	kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

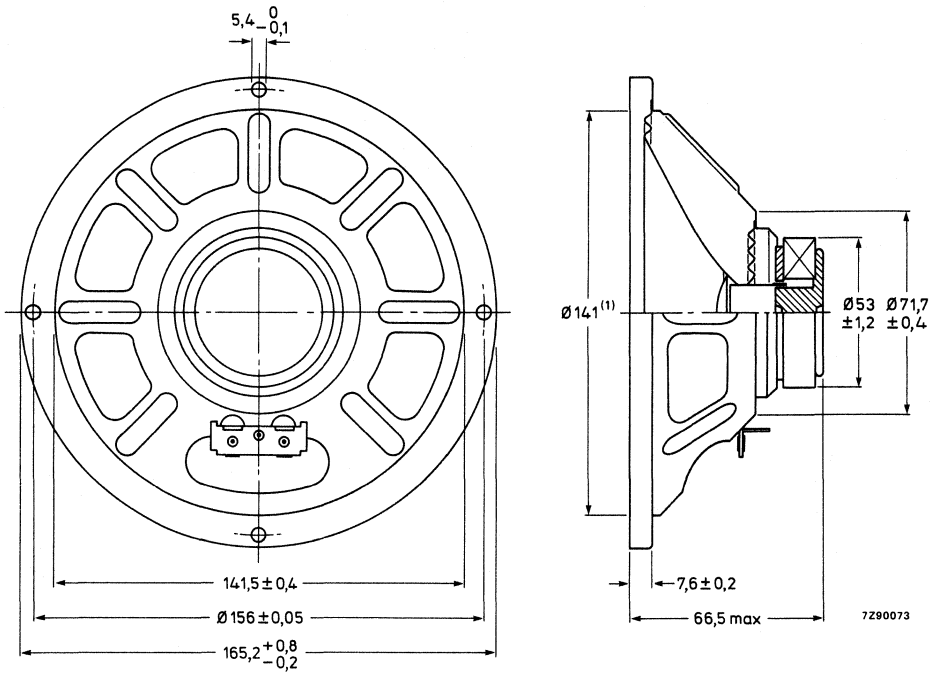


Fig. 1.

→ (1) Recommended baffle hole (141 mm) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD70804/W4 catalogue number 2422 257 27921 }
 AD70804/W8 catalogue number 2422 257 27922 } These numbers are for bulk-packed loudspeakers.

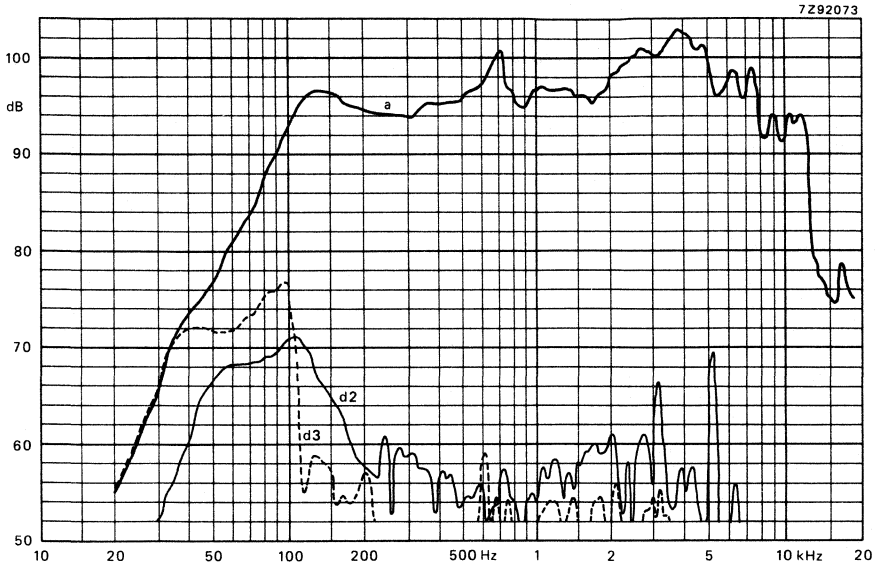


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7 inch WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: textile
- gaskets: foam
- magnetic compensation: none
- recommended enclosure: 15 litre

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,9 Ω
Rated frequency range	up to 5000 Hz
Resonance frequency	74 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	25 W
Max. power on loudspeaker	40 W
Operating power (sound level 96 dB, 1 m)	8 W
Sweep voltage (20 to 20 000 Hz)	5,5 V
Filter	none
Characteristic sensitivity	87 dB
Energy in air gap	53 mJ
Flux density	0,98 T
Force factor (Bxl) at 1A	2,9 Wb/m
Piston diameter	0,125 m
Piston area	0,0123 m ²
Total moving mass	6,3 g
Compliance, loudspeaker unmounted	0,81 x 10 ⁻³ m/N
Equivalent box volume	15 l
Quality factor, loudspeaker unmounted	
mechanical	3,33
electrical	2,16
total	1,31
Air-gap height	3 mm
Air-gap length	0,845 mm
Voice coil height	6,5 mm
Rated coil diameter	18 mm
Magnet material	ceramic
diameter	53 mm
mass	0,1 kg
Mass of loudspeaker	0,3 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

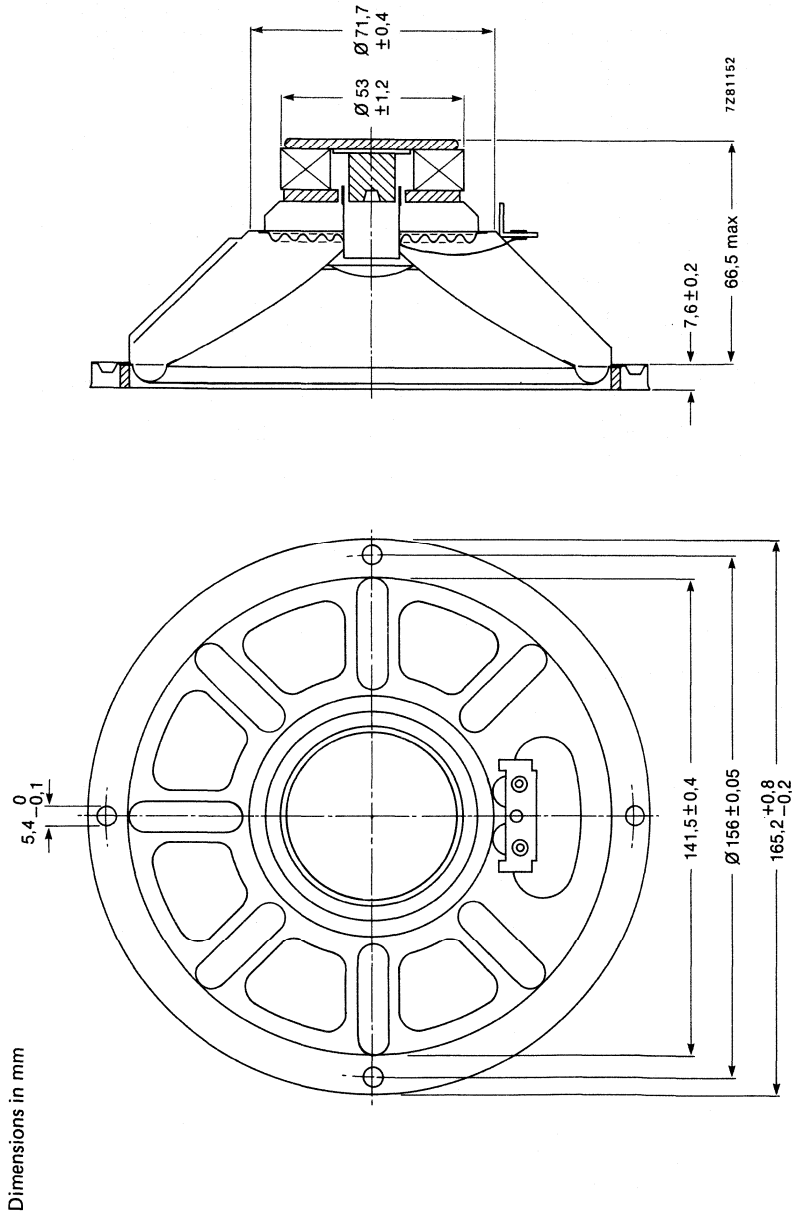


Fig. 1.

Recommended baffle opening ($\varnothing 141 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a mark to facilitate phase matching.

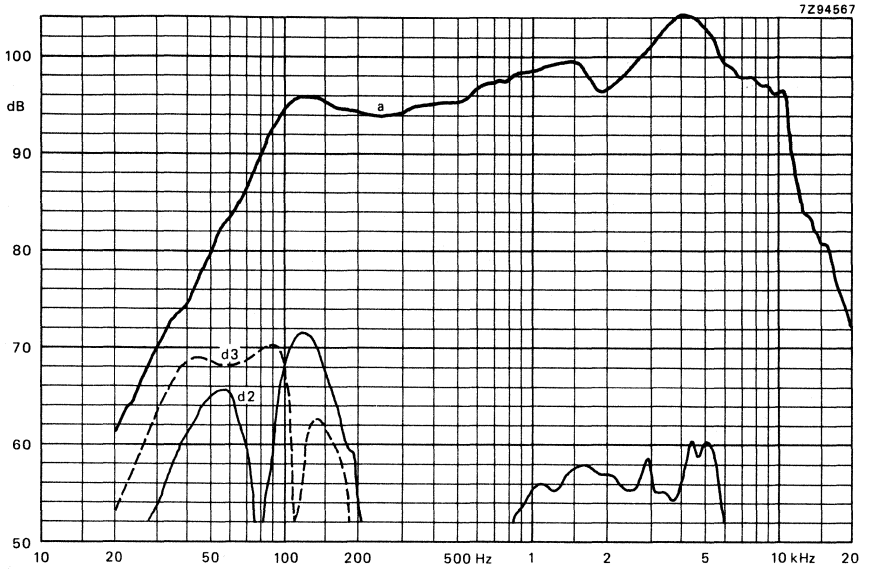


Fig. 2.

AVAILABLE VERSION

AD70805/W8. catalogue number 2422 257 27924 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.



7 inch OCTAGONAL MEDIUM POWER LOUDSPEAKER

APPLICATION

A full range loudspeaker for all audio applications.

TECHNICAL DATA

	version			
	X4	X8	M4	M8
Rated impedance	4	8	4	8 Ω
Voice coil resistance	3,4	7	3,4	7 Ω
Rated frequency range	16 to 15 000		60 to 20 000 Hz	
Resonance frequency	105			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	7			W
Operating power (sound level 90 dB, 1 m)	0,65	0,6	0,75	0,65 W
Sweep voltage (50 to 20 000 Hz)	3,8	5,3	3,8	5,3 V
Energy in air gap	38			mJ
Flux density	1,1			T
Air-gap height	2,5			mm
Voice coil height	4	4,3	4	4,3 mm
Core diameter	14,5			mm
Magnet material	ceramic			
diameter	45			mm
mass	0,05			kg
Mass of loudspeaker	0,217			kg

The loudspeaker has a paper cone. Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

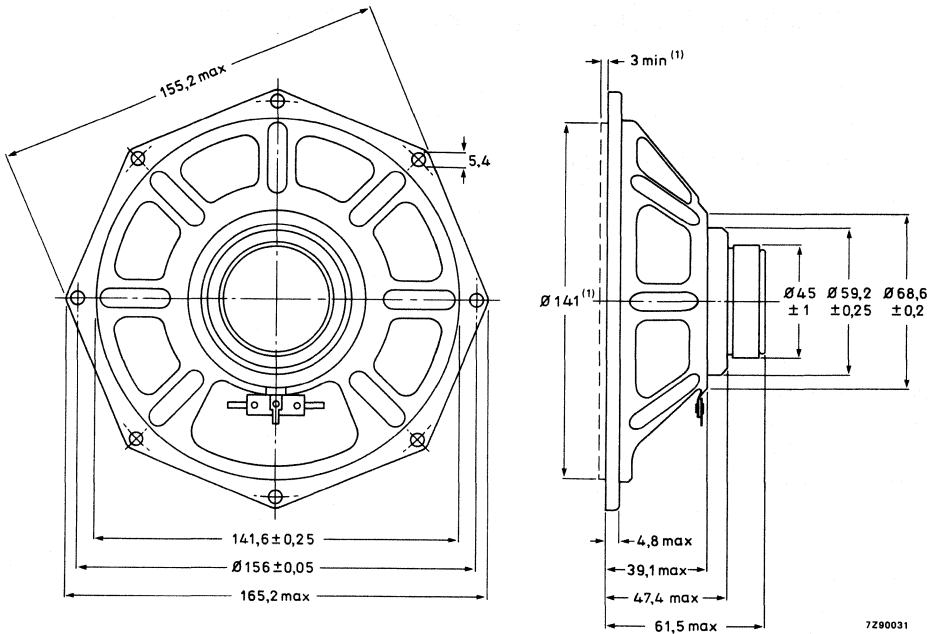


Fig. 1.

(1) Recommended baffle opening (ϕ 141 mm) and clearance depth (3 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD70850/X4 catalogue number 2422 257 47321
- AD70850/X8 catalogue number 2422 257 47322
- AD70850/M4 catalogue number 2422 257 47331
- AD70850/M8 catalogue number 2422 257 47332

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

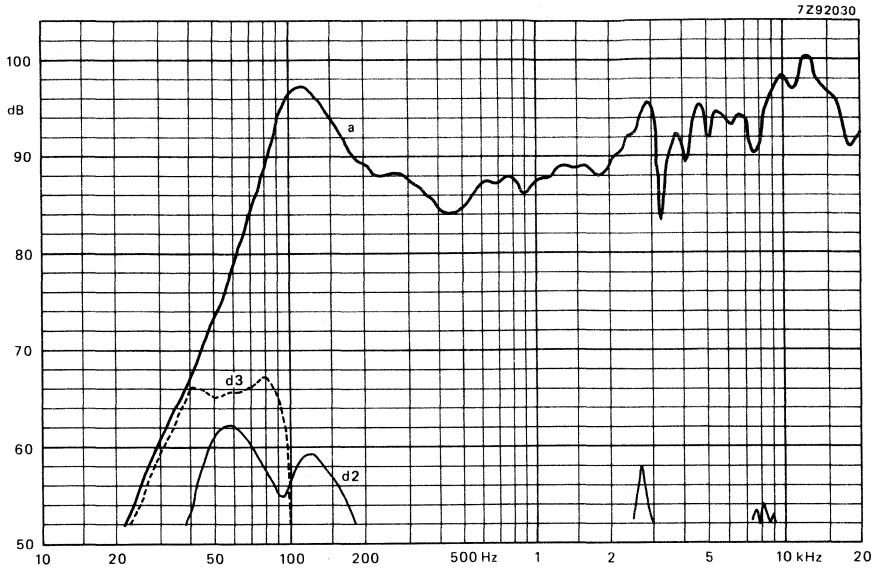


Fig. 2a AD70850/M.

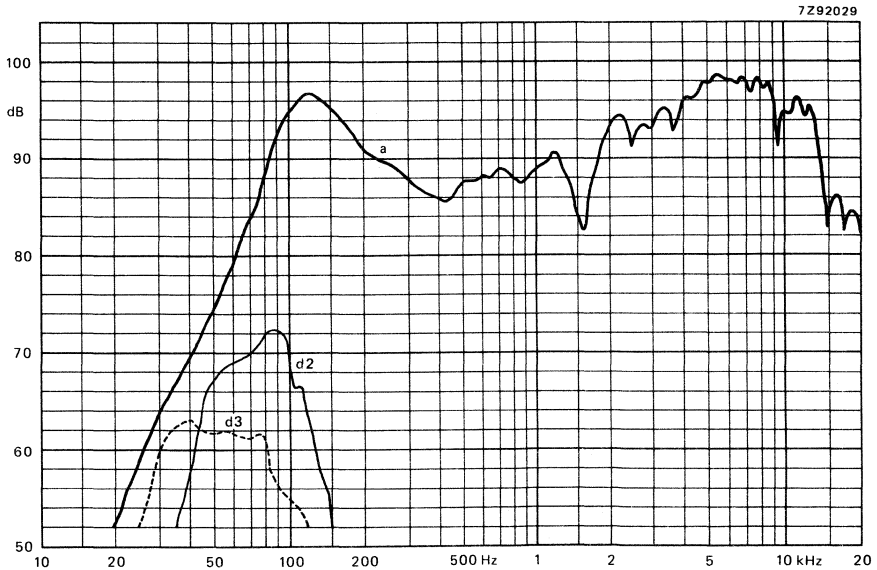


Fig. 2b AD70850/X.

7 inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker with 4 mounting lugs for audio and video applications. AD77740 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	70 to 13 000			Hz
Resonance frequency	100			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5			W
Operating power (sound level 90 dB, 1 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker	106			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a plastic frame and a paper cone.

Screened and compensated loudspeakers are available on request. ←

AD77720/X.
AD77740/X.

Dimensions in mm

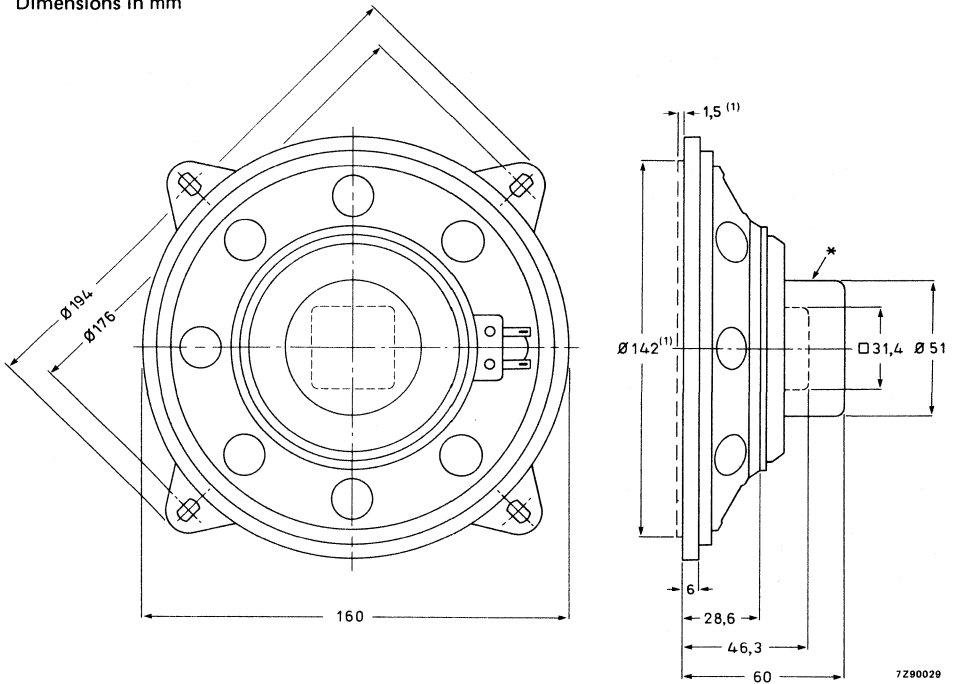


Fig. 1.

(1) Recommended baffle opening ($\phi 142$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD77720/X4 catalogue number 2403 257 27921
- AD77720/X8 catalogue number 2403 257 27922
- AD77720/X15 catalogue number 2403 257 27923
- AD77720/X25 catalogue number 2403 257 27924
- AD77740/X4 catalogue number 2403 257 27821
- AD77740/X8 catalogue number 2403 257 27822
- AD77740/X15 catalogue number 2403 257 27823
- AD77740/X25 catalogue number 2403 257 27824

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7292026

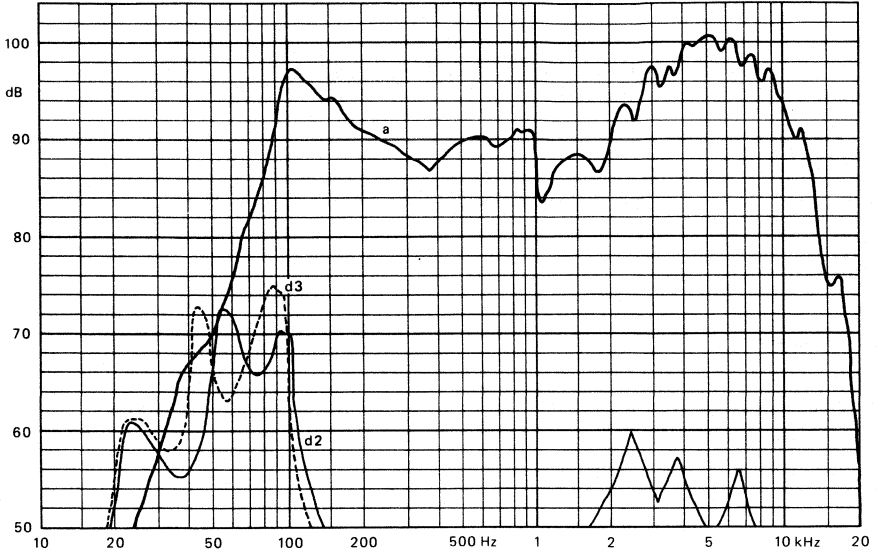


Fig. 2.

7 inch LOW POWER LOUDSPEAKERS

APPLICATION

Round loudspeaker with 4 mounting lugs for audio and video applications. AD77745 has a screened magnet system.

TECHNICAL DATA

	version			
	X4	X8	X15	X25
Rated impedance	4	8	15	25 Ω
Voice coil resistance	3,5	7,1	13,7	22,8 Ω
Rated frequency range	70 to 13 000			Hz
Resonance frequency	100			Hz
Power handling capacity, measured without filter, loudspeaker unmounted	5			W
Maximum power on loudspeaker	7			W
Operating power (sound level 90 dB, 0,5 m)	400			mW
Sweep voltage (100 to 20 000 Hz)	2,4	3,5	4,7	6,1 V
Filter	none			
Energy in air gap	12,7			mJ
Flux density	0,74			T
Air-gap height	2,5			mm
Voice coil height	2,7	2,2	3,0	3,6 mm
Core diameter	10			mm
Magnet material	ceramic			
square	28,5			mm
mass	18			g
Mass of loudspeaker				
AD77725	100			g
AD77745	120			g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering.

The loudspeaker has a plastic frame and a paper cone.

→ Screened and compensated loudspeakers are available on request.

Dimensions in mm

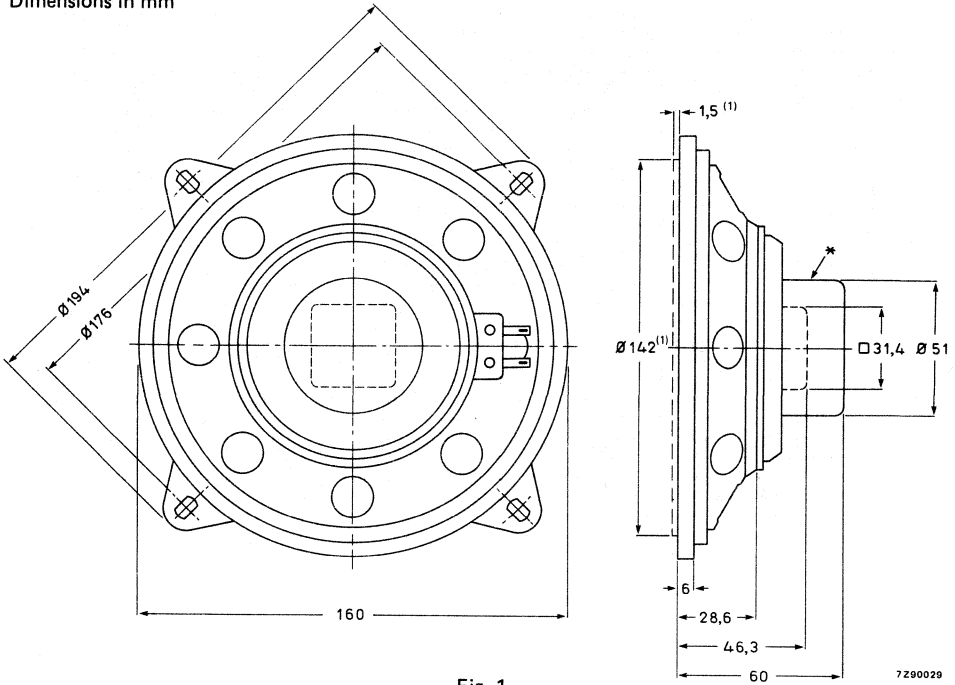


Fig. 1.

* Screening for AD77745 only.

(1) Recommended baffle opening ($\varnothing 142$ mm) and clearance depth (1,5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD77725/X4	catalogue number 2403 257 57921
AD77725/X8	catalogue number 2403 257 57922
AD77725/X15	catalogue number 2403 257 57923
AD77725/X25	catalogue number 2403 257 57924
AD77745/X4	catalogue number 2403 257 57821
AD77745/X8	catalogue number 2403 257 57822
AD77745/X15	catalogue number 2403 257 57823
AD77745/X25	catalogue number 2403 257 57824

These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

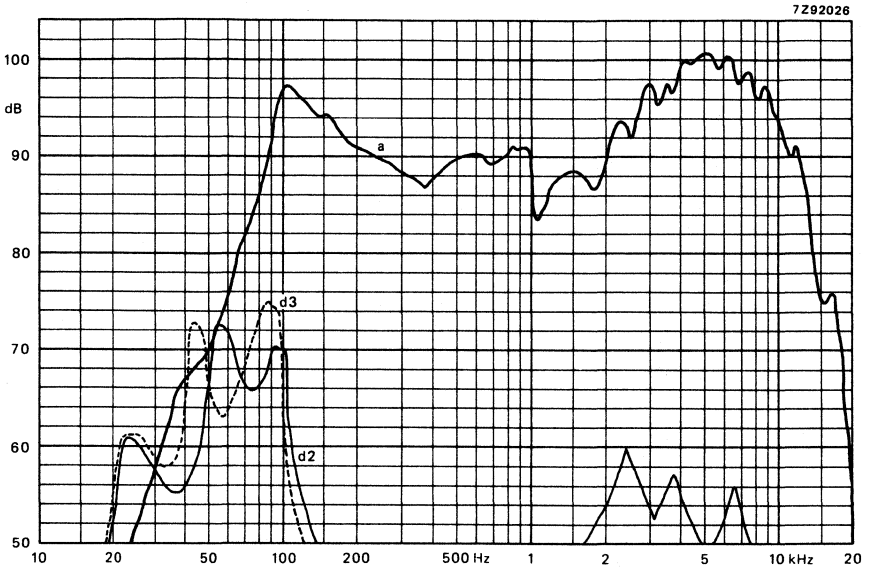


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKER

TECHNICAL DATA

	version	
	W6	W8
Rated impedance	6	8 Ω
Voice coil resistance	5,1	6 Ω
Rated frequency range	20 to 2000	Hz
Resonance frequency	40	Hz
Power handling capacity, measured without filter, loudspeaker mounted in 25 l sealed box	60	W
Maximum power on loudspeaker	120	W
Operating power (sound level 96 dB, 1 m)	3,2	W
Sweep voltage (20 to 2000 Hz)	7,5	9 V
Filter	none	
Energy in air gap	435	mJ
Flux density	0,89	T
Force factor (b x l) at 1 A	8,8	9 Wb/m
Total moving mass	15,5	16,5 g
Compliance, loudspeaker unmounted	1,05	1,03 mm/N
Air-gap height		9 mm
Voice coil height	13	16 mm
Core diameter		35 mm
Magnet material	ceramic	
diameter	102	mm
mass	0,58	kg
Mass of loudspeaker	1,8	kg

Connection is by 2,8 mm (0,11 inch) or by 5,1 mm (0,2 inch) tag connectors or by soldering. The loudspeaker has a paper cone and a foam plastic surround.

Dimensions in mm

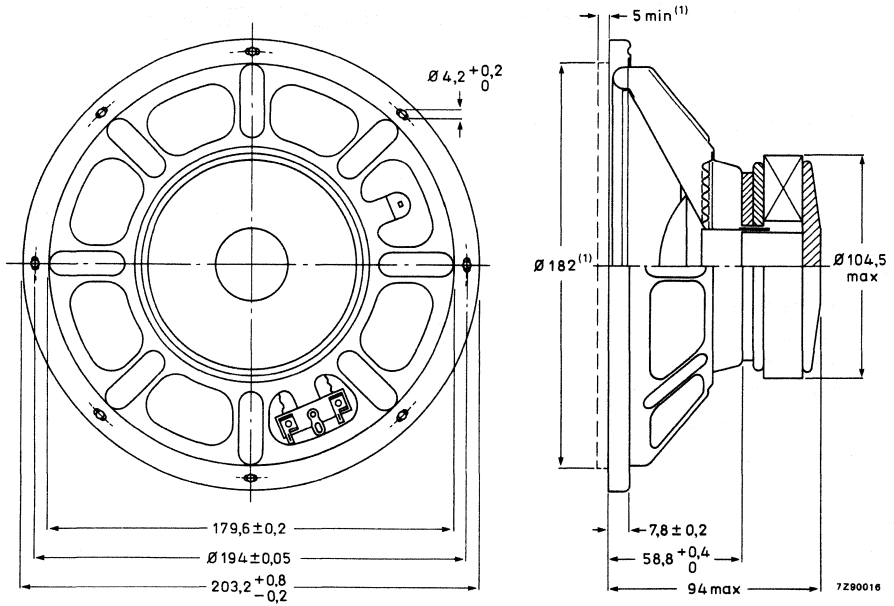


Fig. 1.

(1) Recommended baffle hole ($\phi 182 \text{ mm}$) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. Recommended box enclosure: 25 l . One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD80110/W6 catalogue number 2422 257 48824

AD80110/W8 catalogue number 2422 257 48822

} These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted in a sealed 25 l enclosure.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

7292013

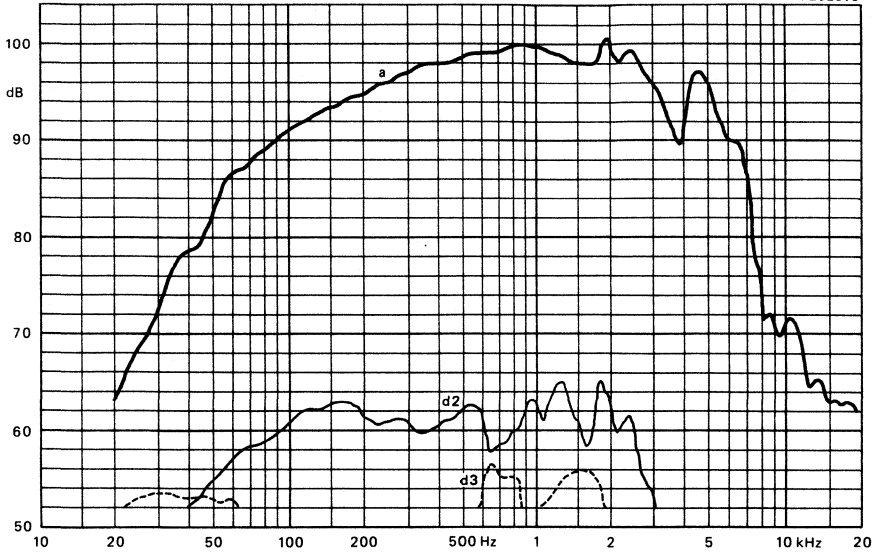


Fig. 2.

8 inch WOOFER LOUDSPEAKER

with smooth roll-off

- frame: octagonal, zinc plated, yellow
- cone: paper black
- surround: textile
- gaskets: none
- magnetical compensation: none
- recommended enclosure: 25 l

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	13,3 Ω
Rated frequency range	60 to 8000 Hz
Resonance frequency	50 Hz
Power handling capacity (1 min. on, 2 min. out: 300 h)	30 W
Maximum power on loudspeaker	60 W
Operating power (sound level 96 dB, 1 m)	5 W
Sweep voltage (20 to 20 000 Hz)	55 V
Filter	none
Characteristic sensitivity	1 dB
Energy in air gap	80,3 mJ
Flux density	0,85 T
Force factor (B x l) at 1 A	4,5 Wb/m
Piston diameter	160 x 10 ⁻³ m
Piston area	20 x 10 ⁻³ m ²
Total moving mass	10,45 x 10 ⁻³ kg
Compliance, loudspeaker unmounted	1,095 x 10 ⁻³ m/N
Equivalent box volume	52,25 l
Quality factor, loudspeaker unmounted	
Q mechanical	4,9
Q electrical	1,20
Q total	0,96
Air-gap height	3 mm
Air-gap length	1,525 mm
Voice coil height	6,5 mm
Coil diameter	18 mm
Magnet material	ceramic
diameter	60 mm
mass	0,15 kg
Mass of loudspeaker	0,47 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

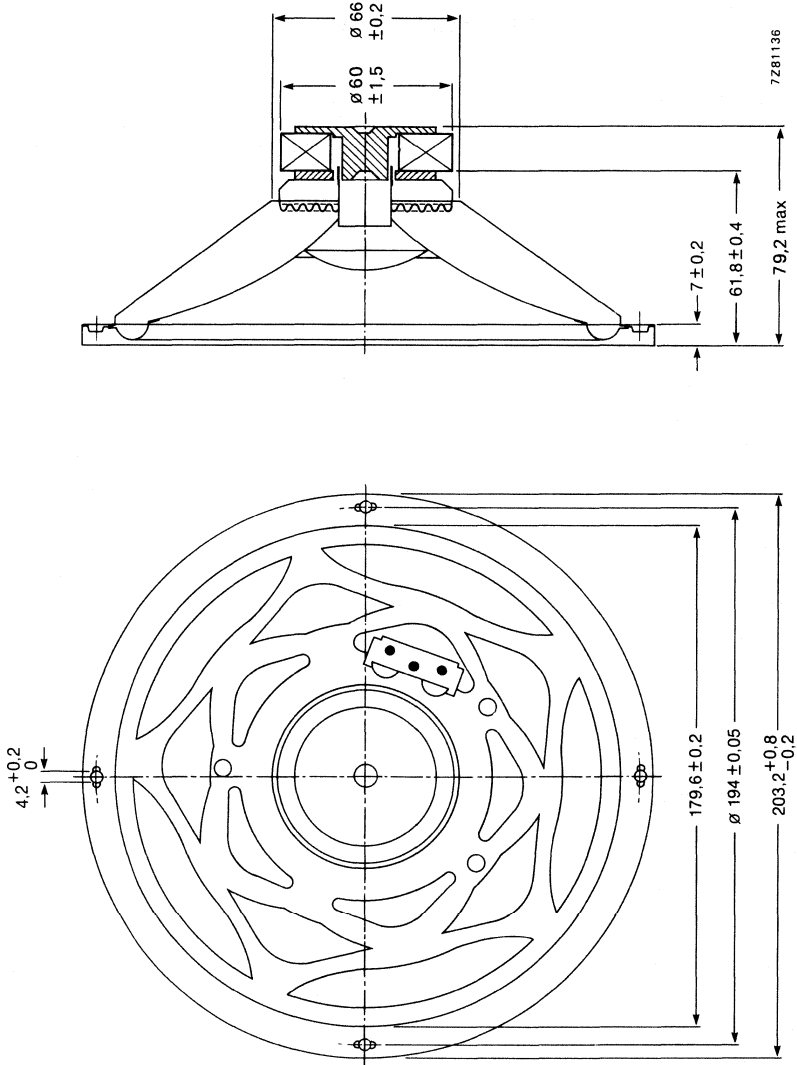


Fig. 1.

Recommended baffle opening ($\varnothing 182 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag (+ side) has a red mark to facilitate phase matching.

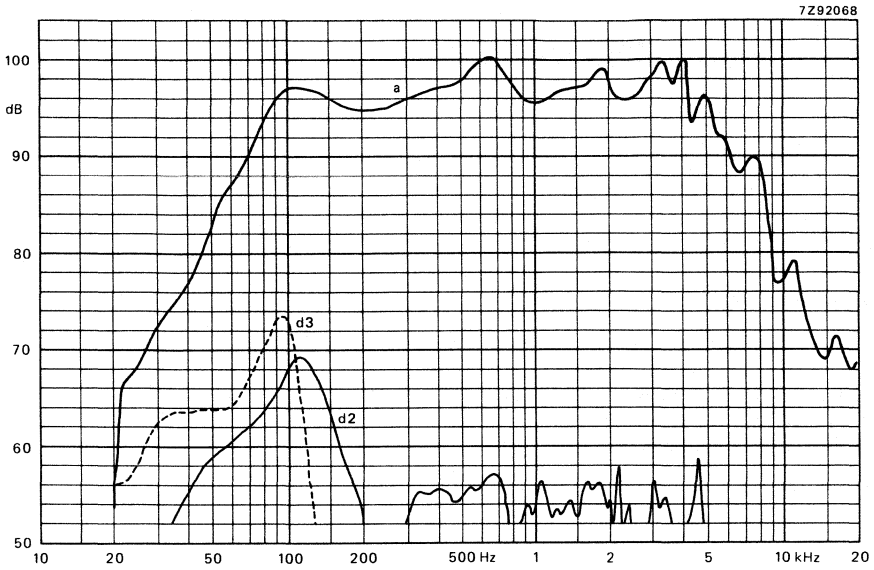


Fig. 2.

AVAILABLE VERSION

AD80400/W8 catalogue number 2422 257 28224. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

8 inch HIGH POWER WOOFER LOUDSPEAKER

APPLICATION

For hi-fi enclosures, recommended box volume 25 l.

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,8 Ω
Rated frequency range	45 to 7000 Hz
Resonance frequency	50 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	35 W
Maximum power on loudspeaker	70 W
Operating power (sound level 96 dB, 1 m)	7 W
Sweep voltage (20 to 4000 Hz)	7,5 V
Filter	none
Energy in air gap	81,7 mJ
Flux density	0,55 T
Force factor (b x l) at 1 A	4,2 Wb/m
Total moving mass, loudspeaker mounted	13,4 g
Compliance, loudspeaker unmounted	0,83 mm/N
Air-gap height	5 mm
Voice coil height	7 mm
Coil diameter	25 mm
Magnet material	ceramic
diameter	60 mm
mass	100 g
Mass of loudspeaker	680 g

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone and a foam rim.

Dimensions in mm

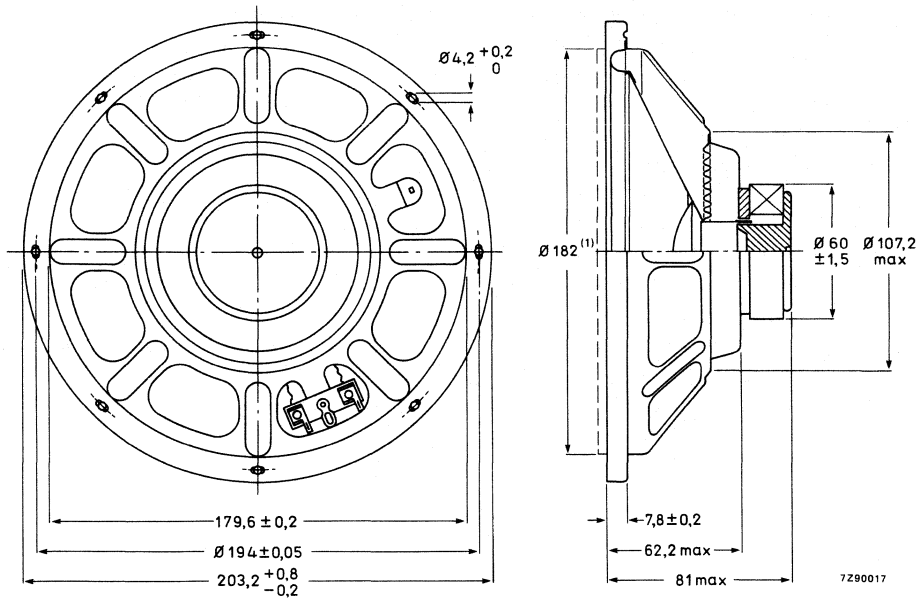


Fig. 1.

(1) Recommended baffle hole ($\varnothing 182$ mm) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD80405/W8 catalogue number 2422 257 28122. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

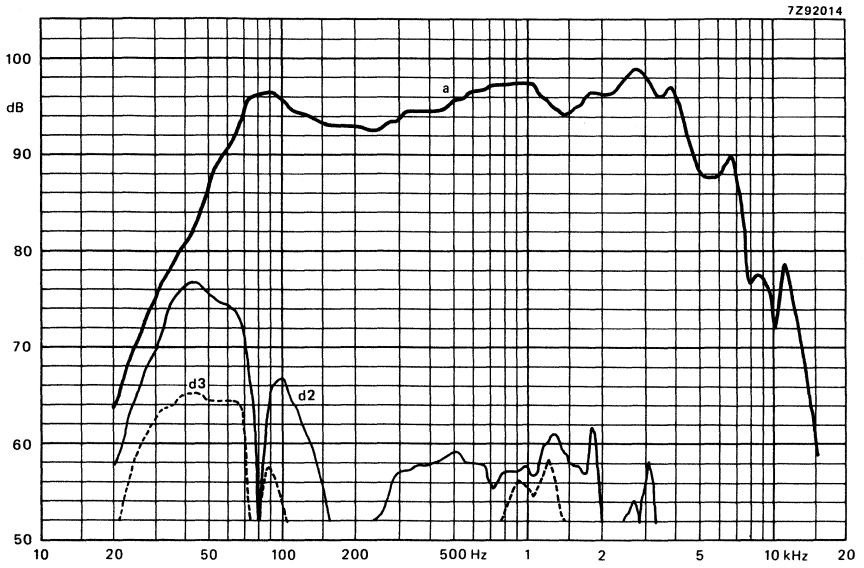


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKERS

APPLICATION

For high-fidelity reproduction in sealed acoustic enclosures. Maximum enclosure volume 25 litres. Maximum recommended crossover frequency 2000 Hz.

TECHNICAL DATA

	version	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,6	7 Ω
Rated frequency range	50 to 2000 Hz	
Resonance frequency	42	Hz
Power handling capacity, measured without filter, mounted in 25 l sealed enclosure	50	W
Maximum power on loudspeaker	100	W
Operating power	5	W
Sweep voltage (frequency range 35 to 3000 Hz)	5	6,3 V
Maximum excursion voltage at 20 Hz	7	V
Characteristic sensitivity	to be established *	
Energy in air gap	135	mJ
Flux density	0,87	T
Force factor (B x l) at 1 A	4	5,5 Wb/m
Total moving mass	14	g
Compliance, loudspeaker unmounted	1,12	mm/N
Air-gap height	5	mm
Voice coil height	10	mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	72	mm
mass	0,26	kg
Mass of loudspeaker	0,8	kg

The loudspeaker has a polyester surround. Connection to the loudspeaker by means of 5,1 mm (0,2 inch) or 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

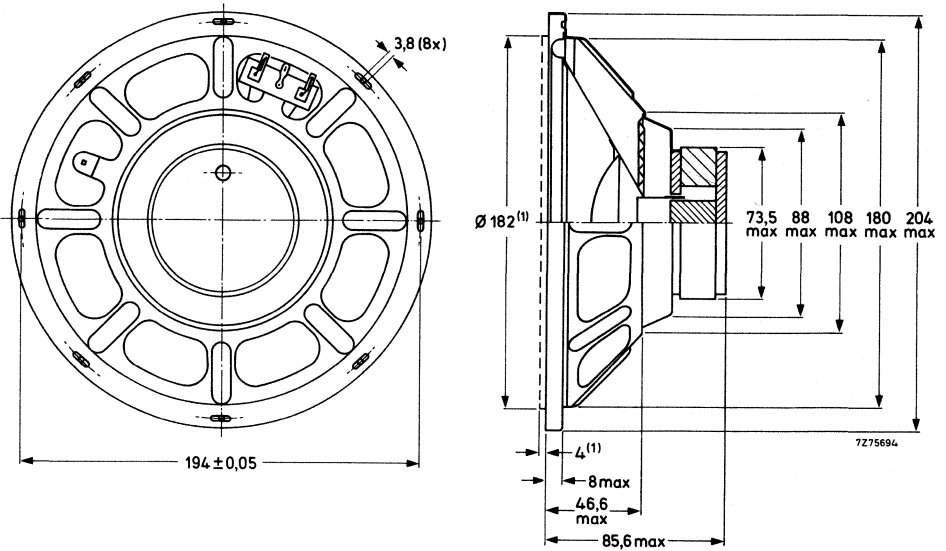


Fig. 1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD80602/W4, catalogue number 2422 257 48331
 AD80602/W8, catalogue number 2422 257 48332

} these numbers apply to bulk packed loudspeakers, minimum packing quantity 12 per unit.

FREQUENCY RESPONSE CURVES (See Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted in sealed 25 l enclosure, filled with 1 kg of glasswool.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

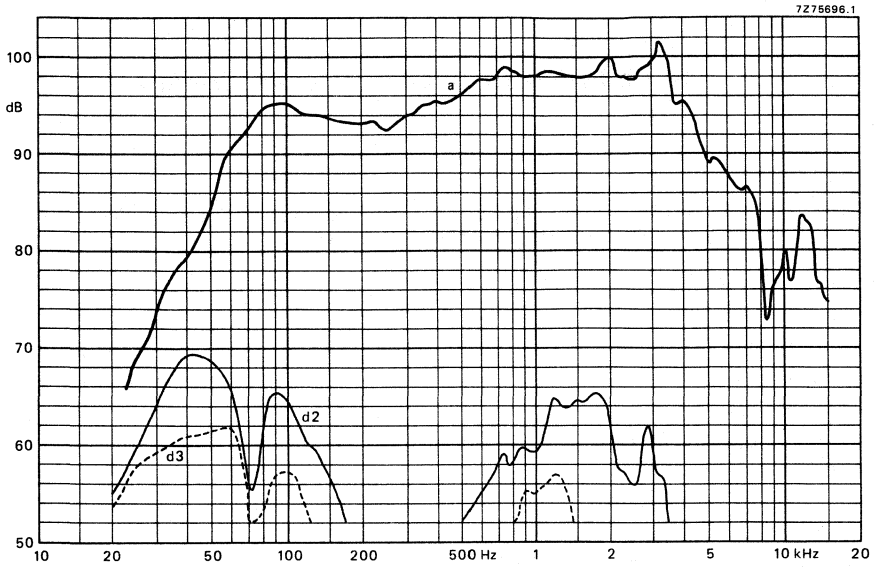


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKER

APPLICATION

For bass reproduction in high economy enclosures. Recommended volume enclosure 25 litres. The loudspeaker has a smooth roll-off allowing a 6 dB per octave filter.

TECHNICAL DATA

Rated impedance	6 Ω
Voice coil resistance	4,9 Ω
Rated frequency range	60 to 4000 Hz
Resonance frequency	50 Hz
Power handling capacity, mounted in 25 l sealed enclosure, measured without filter	40 W
Maximum power on loudspeaker	60 W
Operating power	4 W
Sweep voltage, frequency range: 35 to 4000 Hz	6 V
Quality factor	
mechanical	6,2
electrical	1,5
total	1,2
Characteristic sensitivity	to be established
Energy in air gap	166 mJ
Flux density	0,66 T
Force factor (B x l) at 1 A	4,6 Wb/m
Total moving mass	13,4 g
Compliance, loudspeaker unmounted	0,83 mm/N
Air-gap length	1,6 mm
Air-gap height	5 mm
Voice coil height	6,5 mm
Core diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,16 kg
Mass of loudspeaker	0,65 kg

The loudspeaker has a paper cone and a foam rubber surround. Connection to the loudspeaker by means of 5,1 mm (0,2 inch) or 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

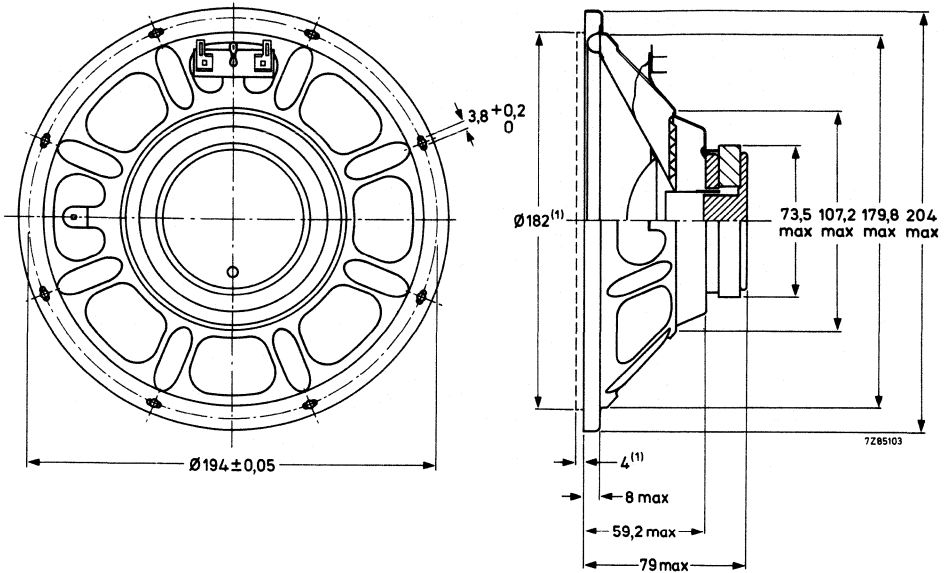


Fig. 1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSION

AD80605/W6, catalogue number 2422 257 48325

{ this number applies to bulk packed loudspeakers, minimum packing quantity 12 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in half free field at the operating power. Loudspeaker mounted in sealed 25 l enclosure.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

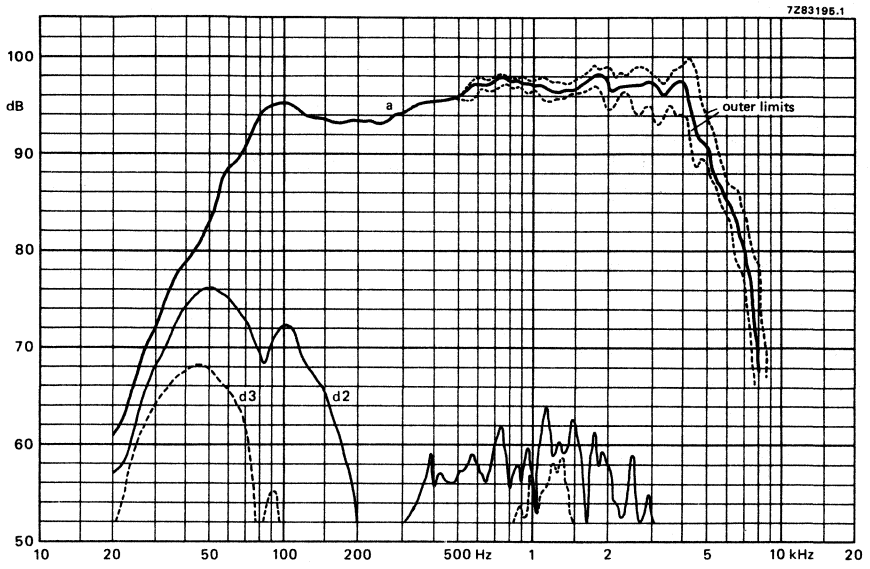


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: foam

TECHNICAL DATA

	version		
	W4	W6	W8
Rated impedance	4	6	8 Ω
Voice coil resistance	3,4	4,6	6,3 Ω
Resonance frequency	36	40	38 Hz
Power handling capacity, measured without filter, loudspeaker unmounted		50	W
Maximum power on loudspeaker		100	W
Operating power (sound level 96 dB, 1 m)		6	W
Sweep voltage (35 to 3500 Hz)	4	4,8	5,5 V
Filter		none	
Excursion voltage at 20 Hz	6		8,5 V
Energy in air gap		134	mJ
Flux density		0,64	T
Force factor (b x l) at 1 A	4,9	6	6 Wb/m
Total moving mass	18	18,9	16 g
Compliance, loudspeaker unmounted	1,16	0,93	1,18 mm/W
Air-gap length		1,9	mm
Air-gap height		5	mm
Voice coil height		12	mm
Coil diameter		25	mm
Magnet material		ceramic	
diameter		72	mm
mass		0,26	kg
Mass of loudspeaker		0,81	kg
Recommended box volume		25	l

A second connecting plate permits support of a filter capacitor.

Connection is by 5,1 mm (0,2 inch) or 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone and a foam plastic surround.

Dimensions in mm

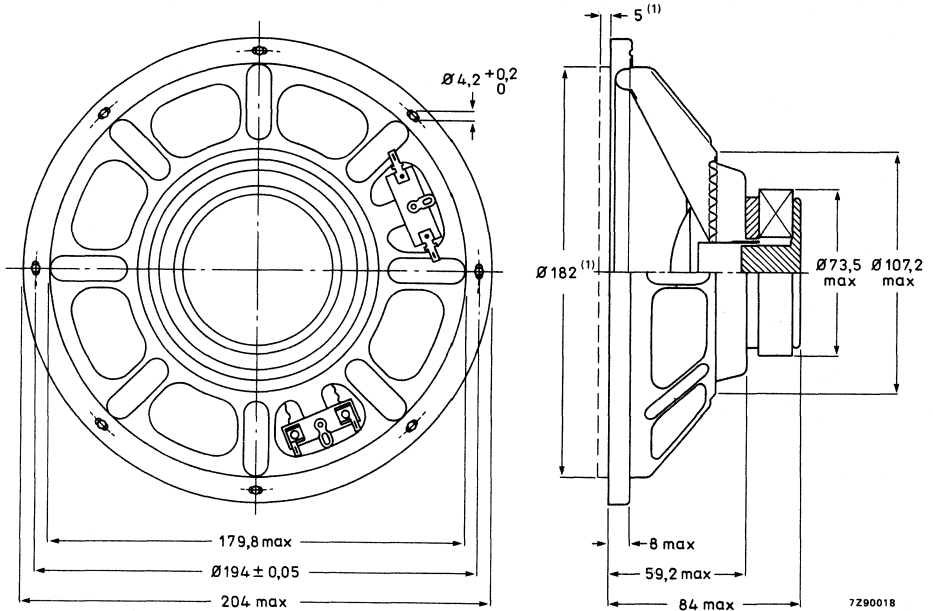


Fig. 1.

(1) Recommended baffle hole (\varnothing 182 mm) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. Recommended box enclosure: 25 l. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

AD80806/W4	catalogue number 2422 257 48231	} These numbers are for bulk-packed loudspeakers, minimum packing quantity 8 per unit.
AD80606/W6	catalogue number 2422 257 48238	
AD80606/W8	catalogue number 2422 257 48232	

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted in 25 l enclosure.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

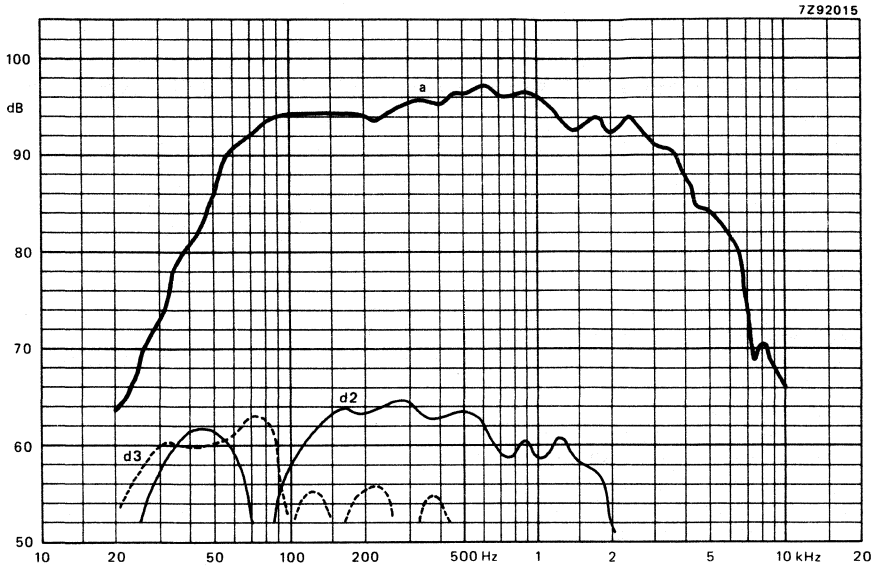


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: foam
- gaskets: none
- magnetic compensation: none
- recommended enclosure: 26 l

TECHNICAL DATA

Rated impedance	6 Ω
Voice coil resistance	5 Ω
Rated frequency range	50 to 4 000 Hz
Sensitivity	t.b.f. dB
Resonance frequency	43 Hz
Cross-over frequency (6 dB/octave slope)	2000 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	50 W
Max. power on loudspeaker	t.b.f. W
Sweep voltage (20 to 20 000 Hz)	7,5 V
Filter	none
Energy in air gap	166 mJ
Flux density	0,66 T
Force factor (Bxl) at 1 A	5,8 Wb/m
Piston diameter	0,16 m
Piston area	0,02 m ²
Total moving mass	14,4 x 10 ⁻³ kg
Compliance, loudspeaker unmounted	1,04 x 10 ⁻³ m/N
Equivalent box volume	49,9 l
Quality factor, loudspeaker mounted in recommended volume	
mechanical	4,59
electrical	1
total	0,82
Air-gap height	5 mm
Air-gap length	1,6 mm
Voice coil height	7 mm
Rated coil diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,26 kg
Mass of loudspeaker	0,765 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

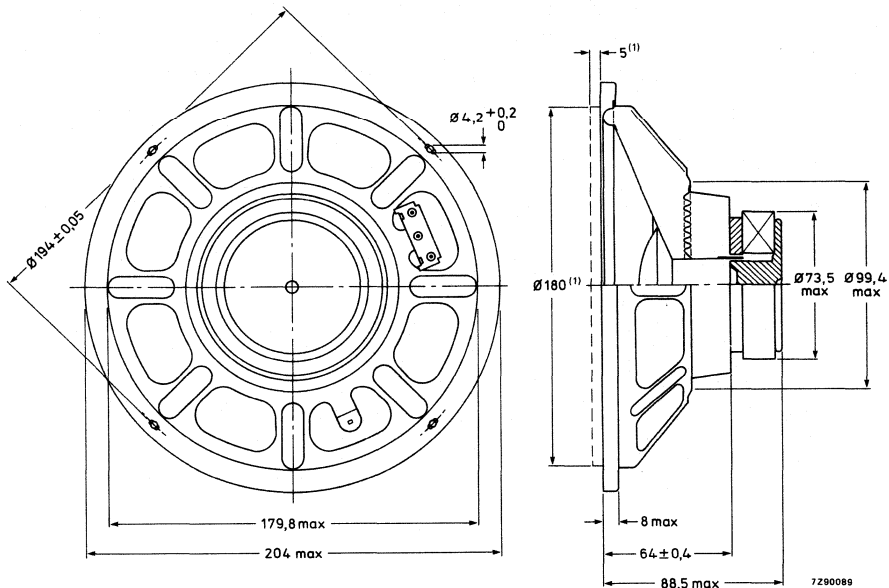


Fig. 1.

(1) Recommended baffle opening ($\varnothing 180$ mm) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity.
One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD80609/W6. catalogue number 2422 257 48334 This number is for bulk-packed loudspeakers.

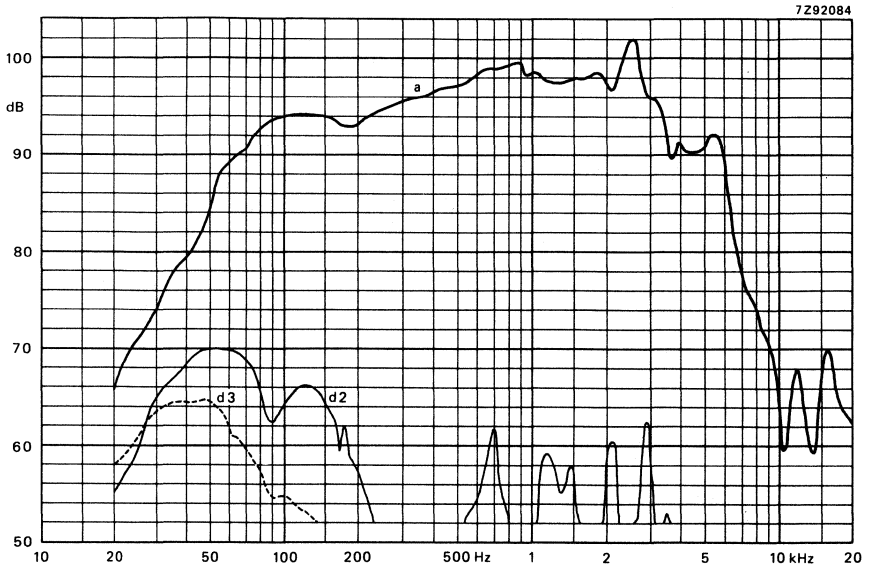


Fig. 2.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

8 inch WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: textile

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7,2 Ω
Rated frequency range	up to 5000 Hz
Resonance frequency	47 Hz
Power handling capacity, measured without filter, loudspeaker unmounted, continuous 100 h	50 W
Max. power on loudspeaker	100 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (20 to 5000 Hz)	6,3 V
Filter	none
Characteristic sensitivity	89,5 dB
Energy in air gap	140 mJ
Flux density	0,93 T
Force factor (Bxl) at 1A	5 Wb/m
Piston diameter	m
Piston area	200 cm ²
Total moving mass	12,3 g
Compliance, loudspeaker unmounted	1,03 x 10 ⁻³ m/N
Equivalent box volume	49,44 l
Quality factor, loudspeaker unmounted	
mechanical	3,36
electrical	1,08
total	0,82
Air-gap height	5 mm
Air-gap length	1 mm
Voice coil height	11 mm
Rated coil diameter	25 mm
Magnet material	ceramic
diameter	72 mm
mass	0,260 kg
Mass of loudspeaker	0,75 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

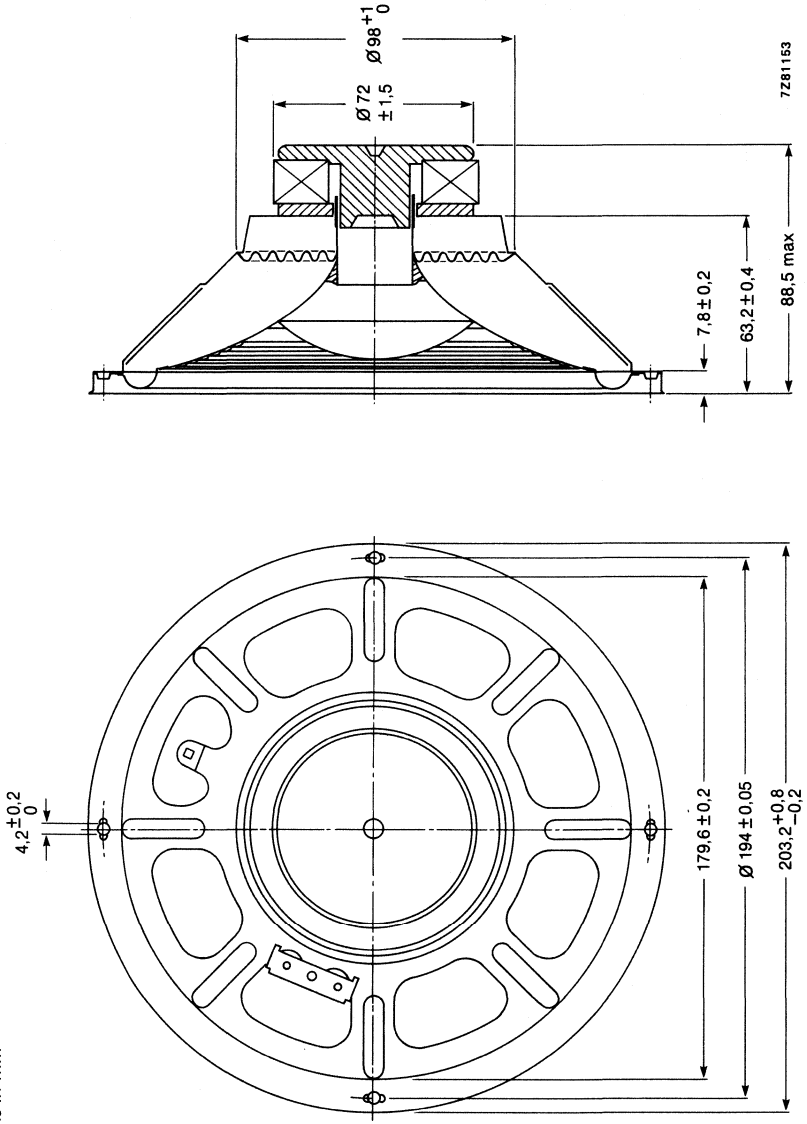


Fig. 1.

Recommended baffle opening ($\text{Ø } 182$ mm) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a mark to facilitate phase matching.

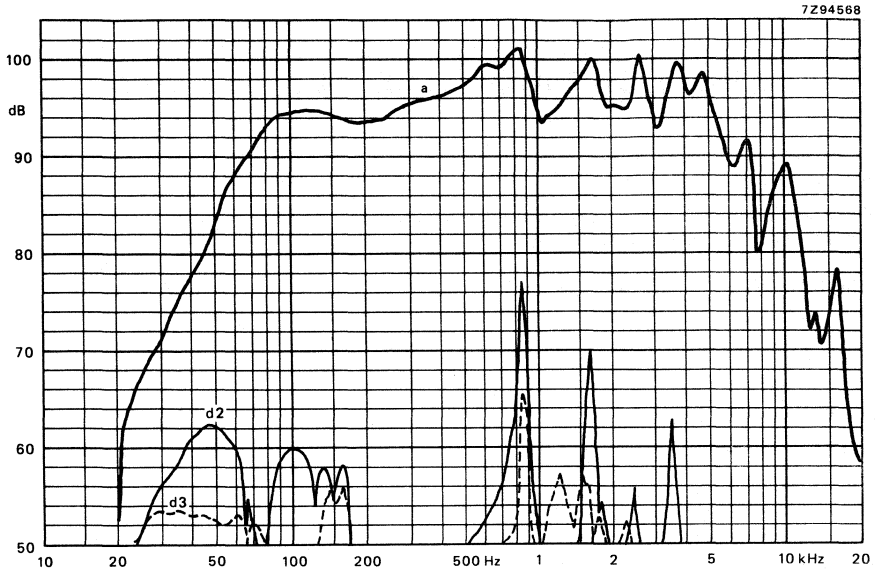


Fig. 2.

AVAILABLE VERSION

AD80612/W8 catalogue number 2422 257 48338 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

8 inch HIGH POWER WOOFER LOUDSPEAKER

APPLICATION

For high-fidelity reproduction in sealed acoustic enclosures. Maximum enclosure volume 25 litres.
Maximum recommended crossover frequency 2500 Hz.

TECHNICAL DATA

	version	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,8	7 Ω
Rated frequency range	50 to 4000 Hz	
Resonance frequency	39	Hz
Power handling capacity, measured without filter, mounted in 25 l sealed enclosure	50	W
Maximum power on loudspeaker	100	W
Operating power	3,8	W
Sweep voltage (frequency range 35 to 3000 Hz)	5	6,3 V
Energy in air gap	229	240 mJ
Flux density	1,1	1,2 T
Force factor (B x l) at 1 A	5,4	6,5 Wb/m
Total moving mass	17,5	g
Compliance, loudspeaker unmounted	1,02	mm/N
Air-gap height	5	mm
Voice coil height	10	mm
Core diameter	25	mm
Magnet material	ceramic	
diameter	90	mm
mass	0,45	kg
Mass of loudspeaker	1,15	kg

The loudspeaker has a paper cone and a polyester surround. Connection to the loudspeaker by means of 5,1 mm (0,2 inch) or 2,8 mm (0,11 inch) tag connectors or by soldering.

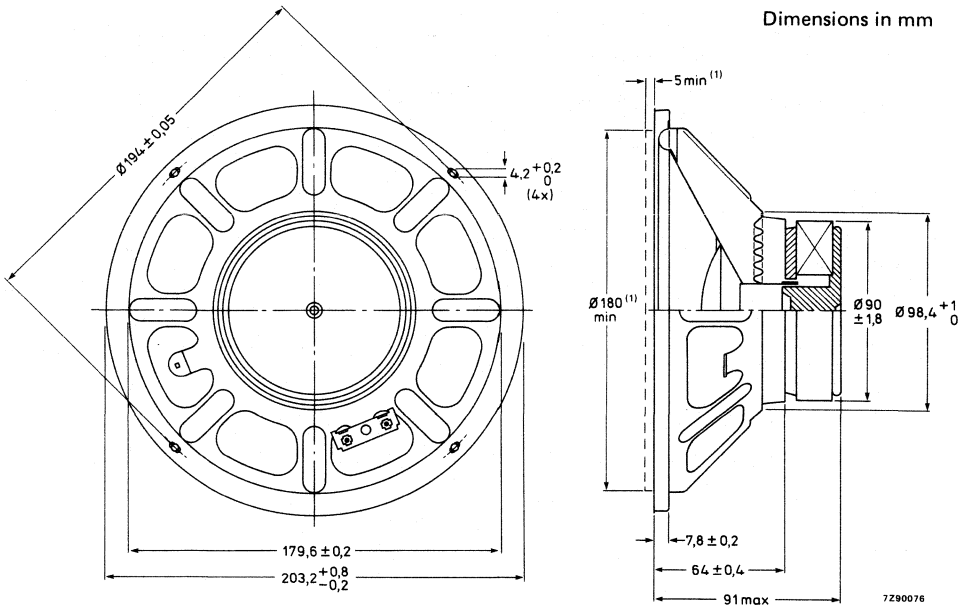


Fig. 1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSIONS

AD80652/W4, catalogue number 2422 257 48531
 AD80652/W8, catalogue number 2422 257 48532

} these numbers apply to bulk
 packed loudspeakers, minimum
 packing quantity 10 per unit.

FREQUENCY RESPONSE CURVES (See Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker mounted in sealed 25 l enclosure, filled with 1 kg of glasswool.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

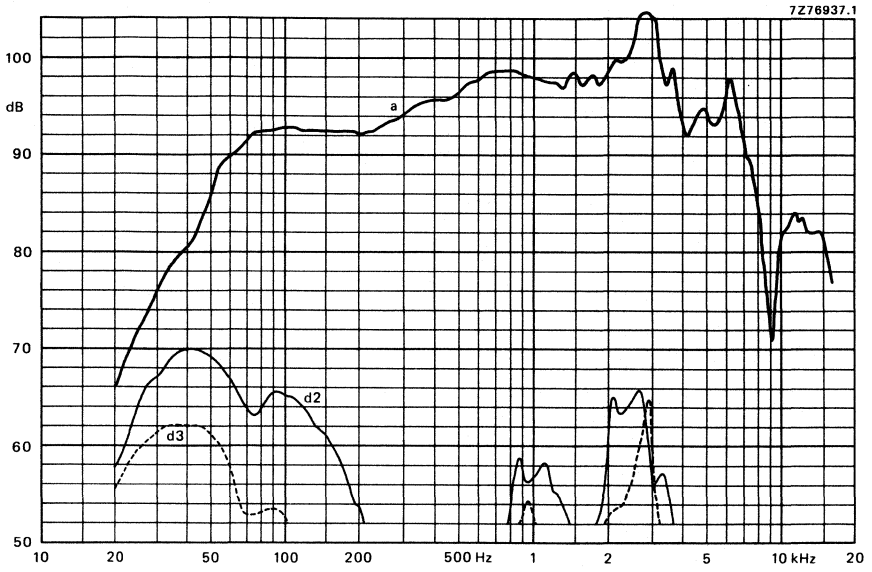


Fig. 2.

8 inch HIGH POWER WOOFER LOUDSPEAKER

APPLICATION

For hi-fi enclosures, recommended box volume 25 l.

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6 Ω
Rated frequency range	50 to 7000 Hz
Resonance frequency	35 Hz
Power handling capacity, measured without filter, loudspeaker unmounted	55 W
Maximum power on loudspeaker	110 W
Operating power (sound level 96 dB, 1 m)	4 W
Sweep voltage (20 to 3500 Hz)	8,5 V
Filter	none
Energy in air gap	249 mJ
Flux density	0,99 T
Force factor (b x l) at 1 A	6,7 Wb/m
Total moving mass, loudspeaker mounted	18,5 g
Compliance, loudspeaker unmounted	1,19 mm/N
Air-gap height	5 mm
Voice coil height	16 mm
Coil diameter	35 mm
Magnet material	ceramic
diameter	90 mm
mass	0,51 kg
Mass of loudspeaker	1,35 kg

Connection is by 2,8 mm (0,11 inch) tag connectors or by soldering. The loudspeaker has a paper cone and a foam rim.

Dimensions in mm

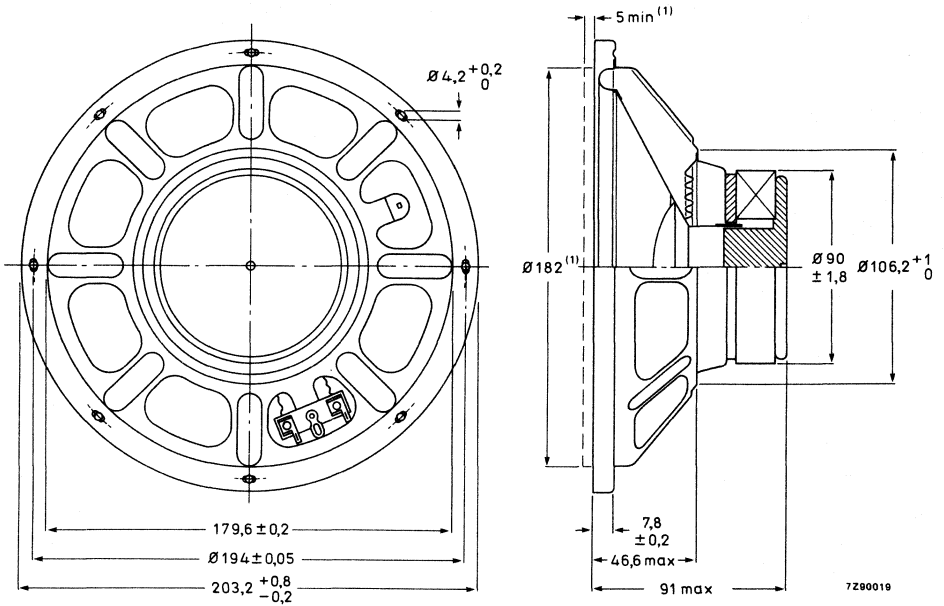


Fig. 1.

(1) Recommended baffle hole ($\phi 182 \text{ mm}$) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. Recommended box enclosure: 25 l . One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD80680/W8 catalogue number 2422 257 48922. This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

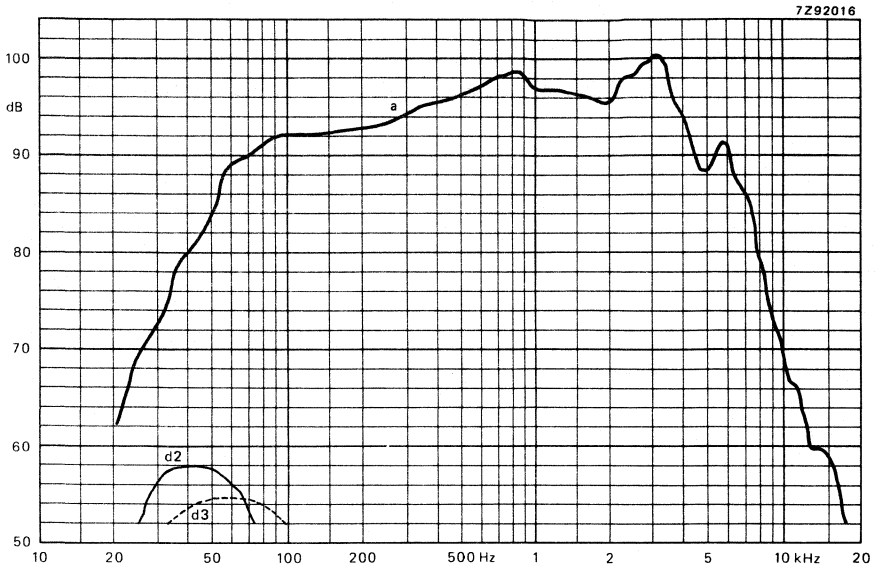


Fig. 2.

8 inch FLAT DIAPHRAGM WOOFER LOUDSPEAKER

TECHNICAL DATA

	versions	
	W4	W8
Rated impedance	4	8 Ω
Voice coil resistance	3,6	6 Ω
Rated frequency range	20 to 2000 Hz	
Resonance frequency	48	47 Hz
Power handling capacity, loudspeaker unmounted	50 W	
Max. power on loudspeaker	100 W	
Operating power (sound level 96 dB, 1 m)	8 W	
Sweep voltage (20 to 3500 Hz)	9	8 V
Filter	none	
Energy in air gap	210	249 mJ
Flux density	0,88	0,99 T
Force factor (B x l) at 1 A	5,4	6,1 Wb/m
Total moving mass, loudspeaker mounted	20 g	
Compliance, loudspeaker unmounted	0,58	0,61 mm/N
Air-gap height	5 mm	
Air-gap length	1,4 mm	
Voice coil height	9 mm	
Coil diameter	35 mm	
Piston diameter	0,163 m	
Piston area	0,021 m ²	
Magnet material	ceramic	
diameter	90 mm	
mass	0,415 kg	
Mass of loudspeaker	1,25 kg	
Equivalent box volume	30,7	32,2 l
Recommended box volume	25 l	
Rim material	rubber	

Connection is by 2,8 mm x 0,5 mm tag connectors by soldering.

Dimensions in mm

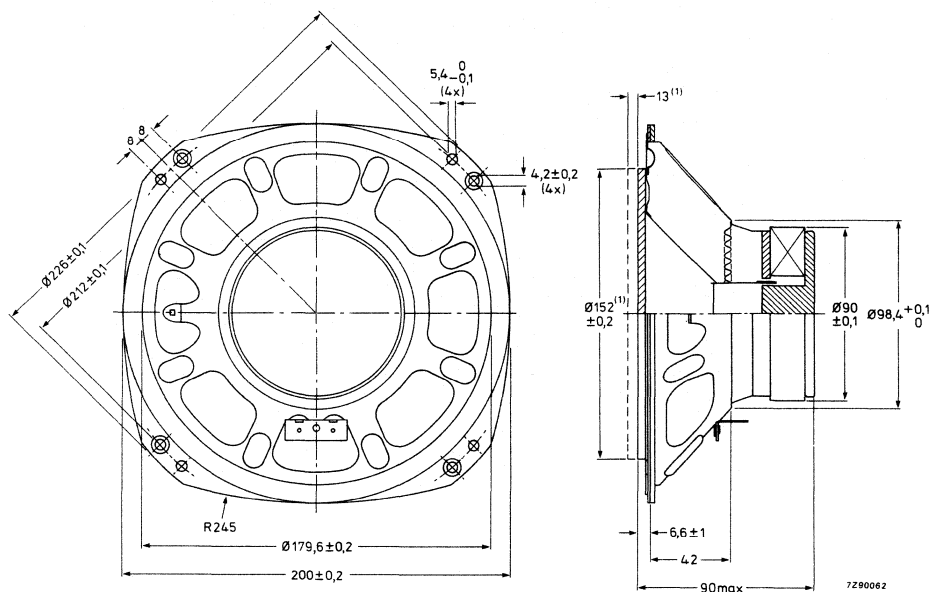


Fig. 1.

Recommended baffle opening (ϕ 152 mm) and mounting clearance (13 mm) are required for cone movement at the specified power handling capacity.

One tag has a red mark to facilitate phase matching.

AVAILABLE VERSION

AD80681/W4 catalogue number 2422 257 50023 } These numbers are for bulk-packed loudspeakers.
AD80681/W8 catalogue number 2422 257 50021 }

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted in recommended box volume.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

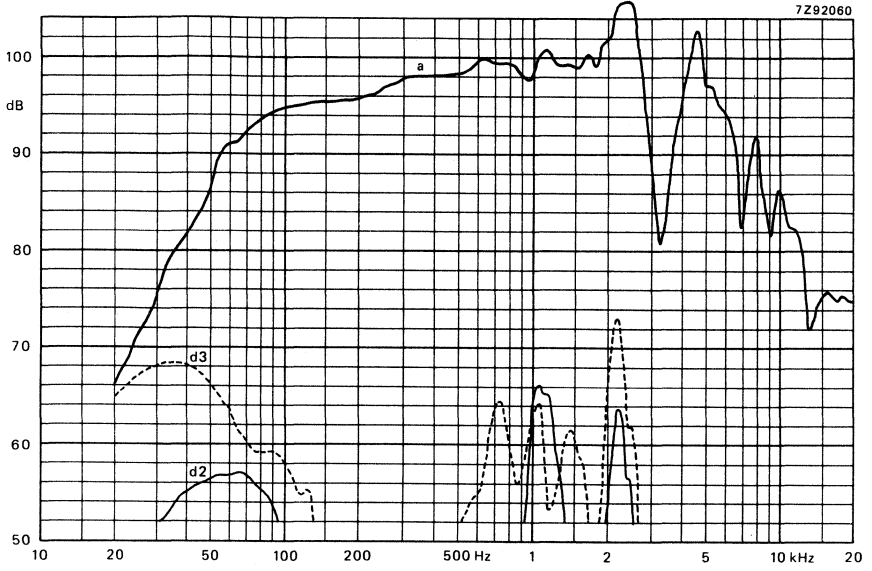


Fig. 2.

8 inch OCTAGONAL HIGH POWER LOUDSPEAKER

- frame: metal
- cone: paper
- surround: treated
- coil former: aluminium

TECHNICAL DATA

	version		
	P4	M4	M8
Rated impedance	4	4	8 Ω
Voice coil resistance	3,4	3,4	7 Ω
Rated frequency range	55 to 6000	55 to 20 000 Hz	
Resonance frequency	75	85	Hz
Power handling capacity, measured without filter, loudspeaker unmounted	10	10	W
Maximum power on loudspeaker	20	27	W
Operating power (sound level 90 dB, 1 m)	0,81	0,75	0,65 W
Sweep voltage (50 to 20 000 Hz)	4,5	5,5	7,75 V
Characteristic sensitivity	91		dB/W/m
Energy in air gap	52	53	mJ
Flux density	0,68	0,98	T
Air-gap height	3	3	mm
Voice coil height	6,5	3,9	4,5 mm
Core diameter	18	18	mm
Magnet material	ceramic	ceramic	
diameter	53	53	mm
mass	0,1	0,1	kg
Mass of loudspeaker	0,37	0,36	kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

Dimensions in mm

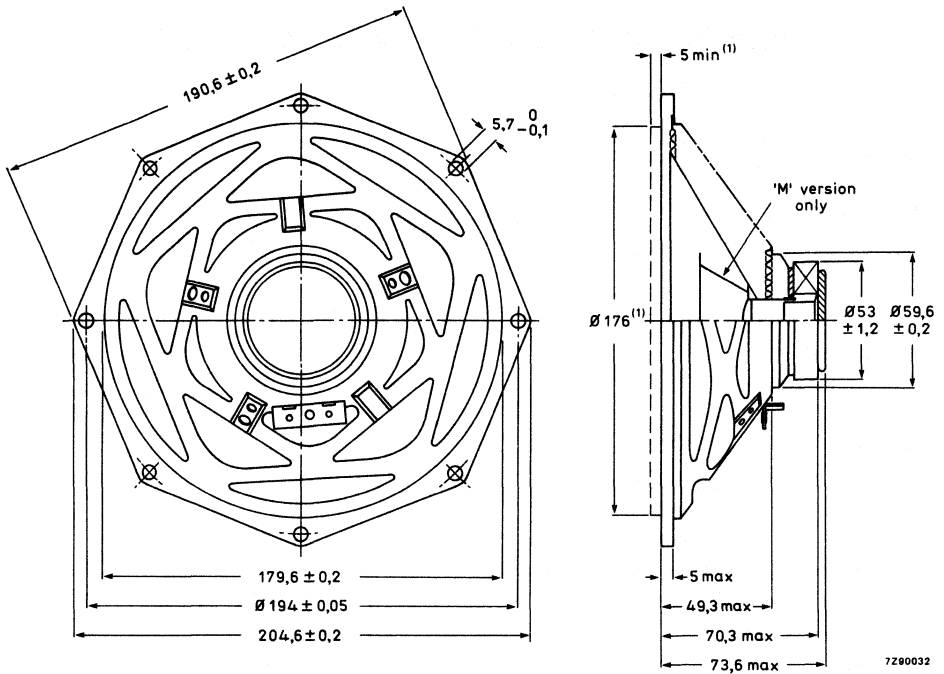


Fig. 1.

(1) Recommended baffle opening ($\emptyset 176$ mm) and clearance depth (5 mm) are required for cone movement at the specified power handling capacity. One tag has a red mark to facilitate phase matching.

AVAILABLE VERSIONS

- AD80800/M4 catalogue number 2422 257 38725
 - AD80800/M8 catalogue number 2422 257 38726
 - AD80800/P4 catalogue number 2422 257 38735
- } These numbers are for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure.

Curves d2 and d3: 2nd and 3rd harmonic distortion.

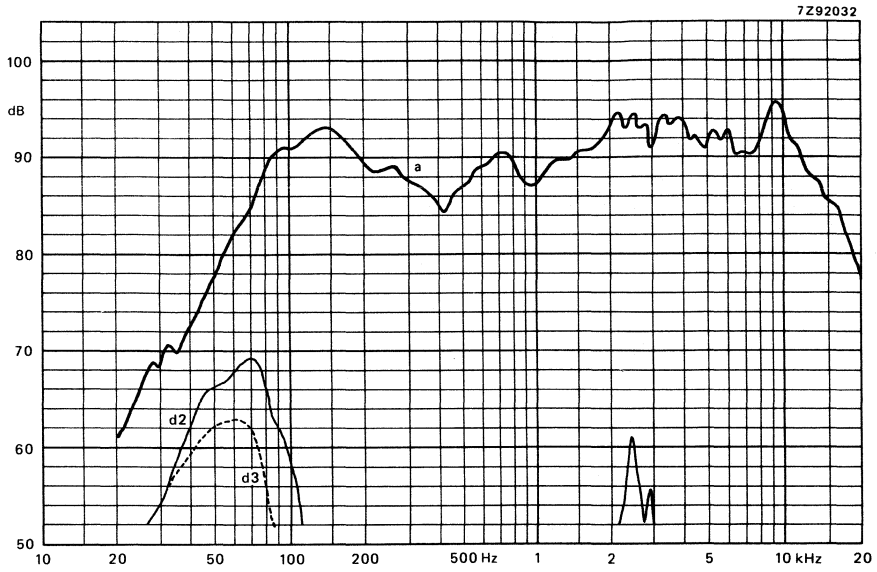


Fig. 2a AD80800/M.

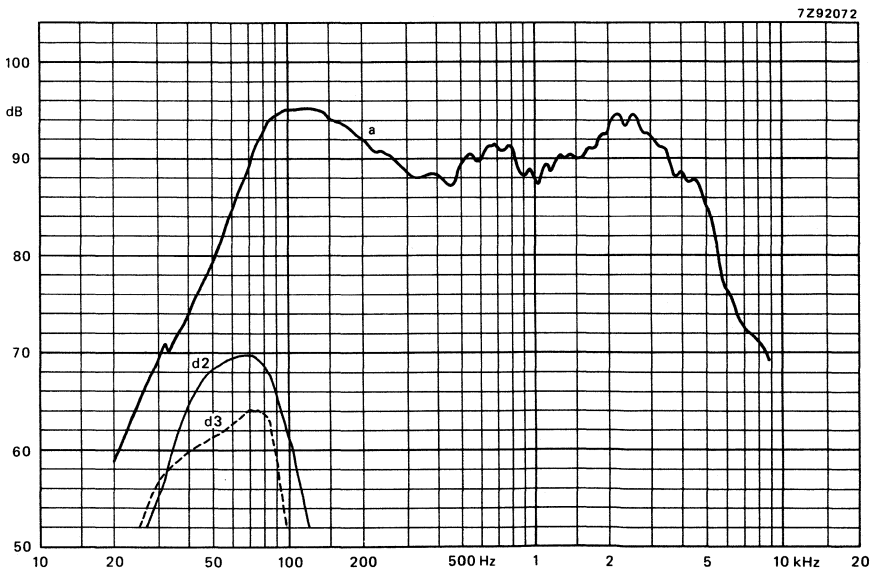


Fig. 2b AD80800/P.

8 inch WOOFER LOUDSPEAKER

- frame: steel, zinc plated, yellow
- cone: paper, black
- surround: textile

TECHNICAL DATA

Rated impedance	4 Ω
Voice coil resistance	3,4 Ω
Rated frequency range	up to 5000 Hz
Resonance frequency	52 Hz
Power handling capacity, measured without filter, loudspeaker unmounted; 1 min. on/ 2 min. off, 300 h	25 W
Max. power on loudspeaker	50 W
Operating power (sound level 96 dB, 1 m)	5 W
Sweep voltage (20 to 5000 Hz)	3,9 V
Filter	none
Characteristic sensitivity	89 dB
Energy in air gap	140 mJ
Flux density	0,52 T
Force factor (Bxl) at 1 A	3,35 Wb/m
Piston diameter	m
Piston area	200 cm ²
Total moving mass	10,6 g
Compliance, loudspeaker unmounted	0,991 x 10 ⁻³ m/N
Equivalent box volume	47,57 l
Quality factor, loudspeaker unmounted	
mechanical	5,4
electrical	0,97
total	0,82
Air-gap height	3 mm
Air-gap length	1,525 mm
Voice coil height	6,5 mm
Rated coil diameter	18 mm
Magnet material	ceramic
diameter	53 mm
mass	0,150 kg
Mass of loudspeaker	0,4 kg

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

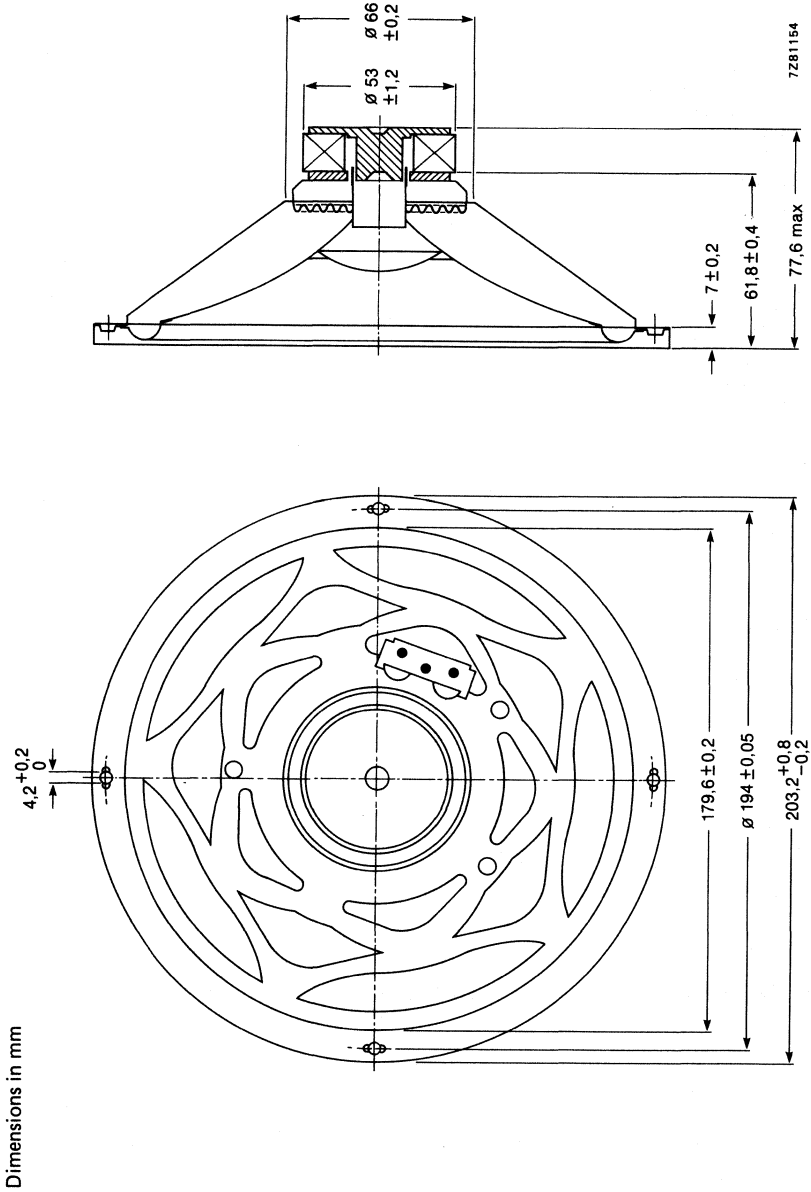


Fig. 1. Recommended baffle opening ($\varnothing 182 \text{ mm}$) and mounting clearance (5 mm) are required for cone movement at the specified power handling capacity. One tag has a mark to facilitate phase matching.

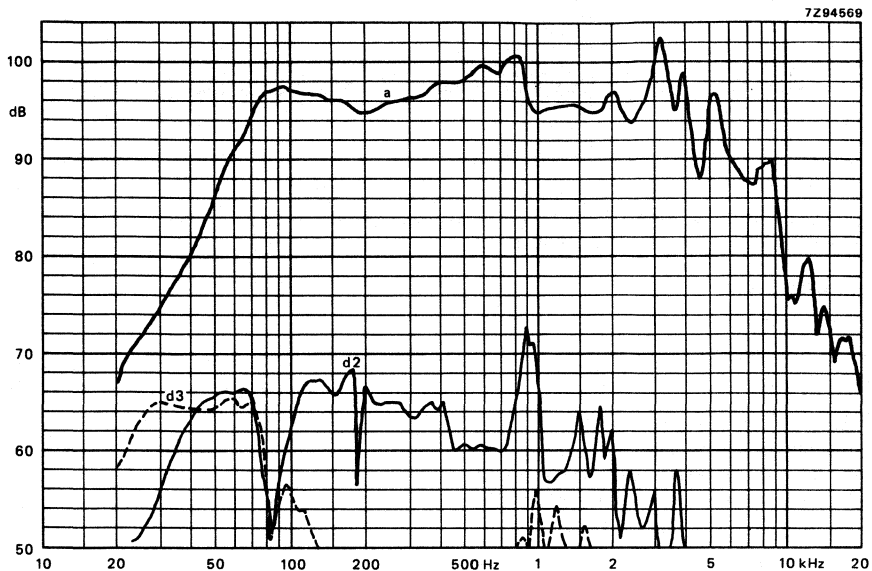


Fig. 2.

AVAILABLE VERSION

AD80800/W4 catalogue number 2422 257 38825 This number is for bulk-packed loudspeakers.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Measured in anechoic room at the operating power. Loudspeaker front mounted on IEC baffle.

Curve a: Sound pressure

Curves d2 and d3: 2nd and 3rd harmonic distortion.

8½ inch HIGH POWER FULL RANGE LOUDSPEAKER

APPLICATION

A full range loudspeaker for studio monitoring equipment and domestic bass reflex enclosures for high fidelity reproduction from 45 Hz to 19 kHz.

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,4 Ω
Frequency range	45 to 19 000 Hz
Resonance frequency	50 Hz
Power handling capacity measured without filter	
loudspeaker mounted in sealed enclosure < 30 l	20 W
loudspeaker mounted in sealed enclosure > 30 l	10 W
Operating power	1,3 W
Sweep voltage, frequency range: 35 to 20 000 Hz	6,3 V
Energy in air gap	203 mJ
Flux density	0,9 T
Air-gap height	6 mm
Voice coil height	8,9 mm
Core diameter	34 mm
Magnet material	ceramic
→ diameter	90 mm
mass	0,4 kg
Mass of loudspeaker	1,32 kg

The loudspeaker has a paper dual cone and surround and a cork gasket on the flange.

Connection to the loudspeaker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

Dimensions in mm

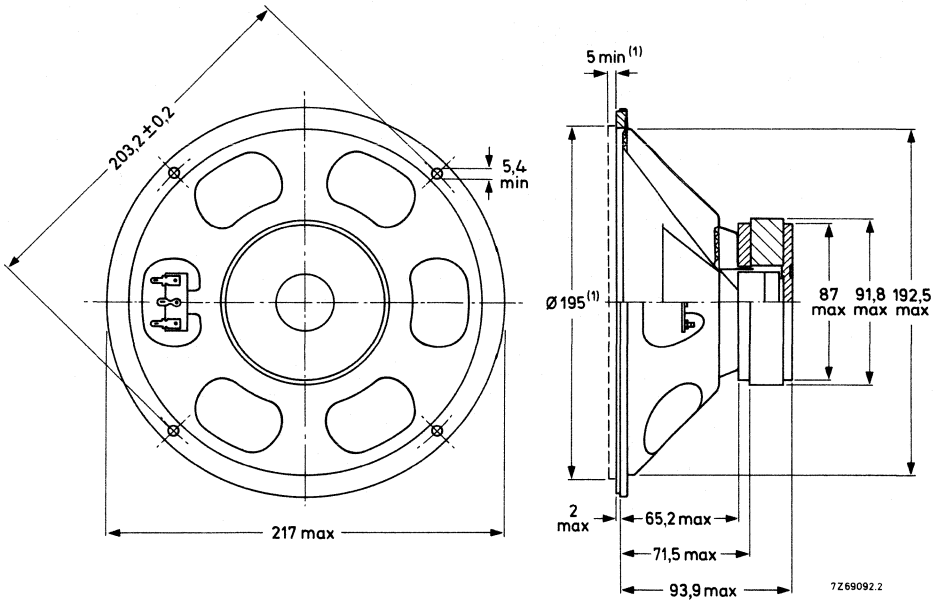


Fig. 1.

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSION

9710/M8, catalogue number 2422 257 48121

this number applies to bulk packed loudspeakers, minimum packing quantity 8 per unit.

FREQUENCY RESPONSE CURVES (see Fig. 2)

Curve a: Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

Curves d2 and d3: 2nd and 3rd harmonic distortion, measured at the operating power of 1,3 W in anechoic room, loudspeaker mounted in sealed 80 l enclosure, filled with 1 kg of glass wool.

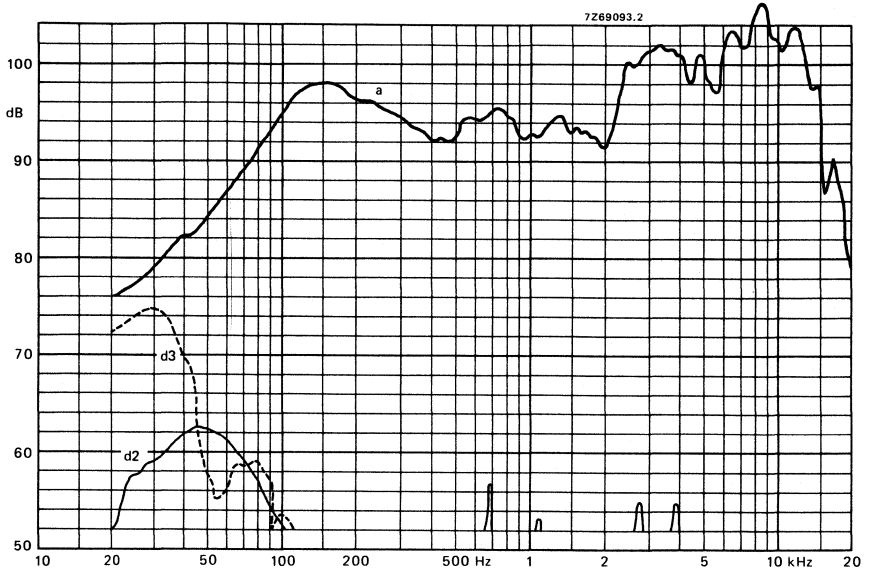


Fig. 2.

Argentina: PHILIPS ARGENTINA S.A., Div. Elcoma, Vedia 3892, 1430 BUENOS AIRES, Tel. 541-7141/7242/7343/7444/7545.
Australia: PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division, 11 Waltham Street, ARTARMON, N.S.W. 2064, Tel. (02)439 3322.
Austria: ÖSTERREICHISCHE PHILIPS BAUELEMENTE INDUSTRIE G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 6291 11.
Belgium: N.V. PHILIPS & MBE ASSOCIATED, 9 rue du Pavillon, B-1030 BRUXELLES, Tel. (02) 242 74 00.
Brazil: IBRAPE, Caixa Postal 7383, Av. Brigadeiro Faria Lima, 1735 SAO PAULO, SP, Tel. (011) 211-2600.
Canada: PHILIPS ELECTRONICS LTD., Elcoma Division, 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. 292-5161.
Chile: PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. 39-4001.
Colombia: IND. PHILIPS DE COLOMBIA S.A., c/o IPRELENZO LTD., Cra. 21, No. 56-17, BOGOTA, D.E., Tel. 2 49 76 24.
Denmark: MINIWATT A/S, Strandlodsvej 2, P.O. Box 1919, DK 2300 COPENHAGEN S, Tel. (01) 54 11 33.
Finland: OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. 1 72 71.
France: R.T.C. LA RADIODIETECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 43 38 80 00.
Germany (Fed. Republic): VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-0.
Greece: PHILIPS HELLENIQUE S.A., Elcoma Division, 54, Syngrou Av., ATHENS 11742, Tel. 9215311/319.
Hong Kong: PHILIPS HONG KONG LTD., Elcoma Div., 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG, Tel. (0)-245211.
India: PEICO ELECTRONICS & ELECTRICALS LTD., Elcoma Dept., Band Box Building, 254-D Dr. Annie Besant Rd., BOMBAY - 400025, Tel. 4930311/4930590.
Indonesia: P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Div., Setiabudi II Building, 6th Fl., Jalan H.R. Rasuna Said (P.O. Box 223/KBY) Kuningan, JAKARTA - Selatan, Tel. 512572.
Ireland: PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 693355.
Italy: PHILIPS S.p.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2-6752.1.
Japan: NIHON PHILIPS CORP., Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611. (IC Products) SIGNETICS JAPAN LTD., 8-7 Sanbancho Chiyoda-ku, TOKYO 102, Tel. (03) 230-1521.
Korea (Republic of): PHILIPS ELECTRONICS (KOREA) LTD., Elcoma Div., Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL, Tel. 794-5011.
Malaysia: PHILIPS MALAYSIA SDN. BERHAD, No. 4 Persiaran Barat, Petaling Jaya, P.O.B. 2163, KUALA LUMPUR, Selangor, Tel. 77 44 11.
Mexico: ELECTRONICA, S.A. de C.V., Carr. México-Toluca km. 62.5, TOLUCA, Edo. de México 50140, Tel. Toluca 91 (721) 613-00.
Netherlands: PHILIPS NEDERLAND, Marktgroep Elonco, Postbus 90050, 5600 PB EINDHOVEN, Tel. (040) 79 33 33.
New Zealand: PHILIPS NEW ZEALAND LTD., Elcoma Division, 110 Mt. Eden Road, C.P.O. Box 1041, AUCKLAND, Tel. 605-914.
Norway: NORSK A/S PHILIPS, Electronica Dept., Sandstuveien 70, OSLO 6, Tel. 6802 00.
Peru: CADESA, Av. Alfonso Ugarte 1268, LIMA 5, Tel. 326070.
Philippines: PHILIPS INDUSTRIAL DEV. INC., 2246 Pasong Tarno, P.O. Box 911, Makati Comm. Centre, MAKATI-RIZAL 3116, Tel. 86-89-51 to 59.
Portugal: PHILIPS PORTUGUESA S.A.R.L., Av. Eng. Duarte Pacheco 6, 1009 LISBOA Codex, Tel. 68 31 21.
Singapore: PHILIPS PROJECT DEV. (Singapore) PTE LTD., Elcoma Div., Lorong 1, Toa Payoh, SINGAPORE 1231, Tel. 3502 000.
South Africa: EDAC (PTY.) LTD., 3rd Floor Rainer House, Upper Railway Rd. & Ove St., New Doornfontein, JOHANNESBURG 2001, Tel. 614-2362/9.
Spain: MINIWATT S.A., Balmes 22, BARCELONA 7, Tel. 301 63 12.
Sweden: PHILIPS KOMPONENTER A.B., Lidingsvägen 50, S-11584 STOCKHOLM 27, Tel. 08/7821000.
Switzerland: PHILIPS A.G., Elcoma Dept., Alimendstrasse 140-142, CH-8027 ZÜRICH, Tel. 01-48822 11.
Taiwan: PHILIPS TAIWAN LTD., 150 Tun Hua North Road, P.O. Box 22978, TAIPEI, Taiwan, Tel. 7120500.
Thailand: PHILIPS ELECTRICAL CO. OF THAILAND LTD., 283 Sitom Road, P.O. Box 961, BANGKOK, Tel. 233-6330-9.
Turkey: TÜRK PHILIPS TICARET A.Ş., Elcoma Department, İnönü Cad. No. 78-80, P.K.504, 80074 İSTANBUL, Tel. 43 59 10.
United Kingdom: MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-5806633.
United States: (Active Devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000. (Passive Devices) MPECO/ELECTRICA INC., Columbia Rd., MORRISTOWN, N.J. 07960, Tel. (201) 539-2000. (Passive Devices & Electromechanical Devices) CENTRAL LAB INC., 5855 N. Glen Park Rd., MILWAUKEE, WI 53201, Tel. (414)228-7380. (IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 991-2000.
Uruguay: LUZILECTRON S.A., Avda Uruguay 1287, P.O. Box 907, MONTEVIDEO, Tel. 91 43 21.
Venezuela: IND. VENEZOLANAS PHILIPS S.A., c/o MAGNETICA S.A., Calle 6, Ed. Las Tres Jotas, App. Post. 78117, CARACAS, Tel. (02) 239 39 31.

For all other countries apply to: Philips Electronic Components and Materials Division, International Business Relations, Building BAE, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Tel. +31 40 72 33 04, Telex 35000 phctnl