
TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
FOR
CONVERTER, FREQUENCY SHIFT CV-305/U
(NSN 5815-00-503-2599)



**DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
FOR
CONVERTER, FREQUENCY SHIFT CV-305/U
(NSN 5815-00-503-2599)**

Current as of 22 June 1978

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703. In either case a reply will be furnished direct to you.

Table of Contents

	Page	Illus Figure
SECTION I. Introduction.....	1	
II. Repair parts list.....	5	
GROUP 00 CV-305/U.....	5	1-5
01 Ammeter (No parts authorized).....		
SECTION III. Special tools list (Not applicable)		
IV. National stock number and part number index	16	

*This manual supersedes TM 11 -5815-258-34P, 20 July 1976.

**SECTION I
INTRODUCTION**

1. Scope

This manual lists repair parts and special tools required for performance of direct support and general support maintenance of the CV-305/U.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numerical sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III. Special Tools list.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in ascending National item identification number (NIIN, last 9 digits) sequence, of all National stock numbers appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock number and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

The following provides an explanation of columns found in the tabular listings:

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration in which the item is shown.

(2) *Item number.* The number used to identify each item called out in the illustration.

b. *Source, Maintenance, and Recoverability Codes (SMR).*

(1) *Source code.* Source codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA-	Item procured and stocked for anticipated or known usage.
XD-	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA, XD, and aircraft support items as restricted by AR70042.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O-	Support item is removed, replaced, used at the organizational level
F-	Support item is removed, replaced, used at the direct support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
D-	The lowest maintenance level capable of complete repair of the support item is the depot level.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability/ codes</i>	<i>Definition</i>
Z-	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
L-	Reparable item. Repair, condemnation, and disposal not authorized below depot/ specialized repair activity level.

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications standards, and inspection requirements, to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc.). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

The following publications pertain to the CV-305/U and its components:

TM 11-5105, Frequency Shift Converter CV-305/U

TM 11-5815-258-20P, Converter, Frequency Shift CV-305/U

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the repair part belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the repair part belongs.

(3) *Third.* Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in ascending NIIN sequence followed by a list of part numbers in ascending alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)

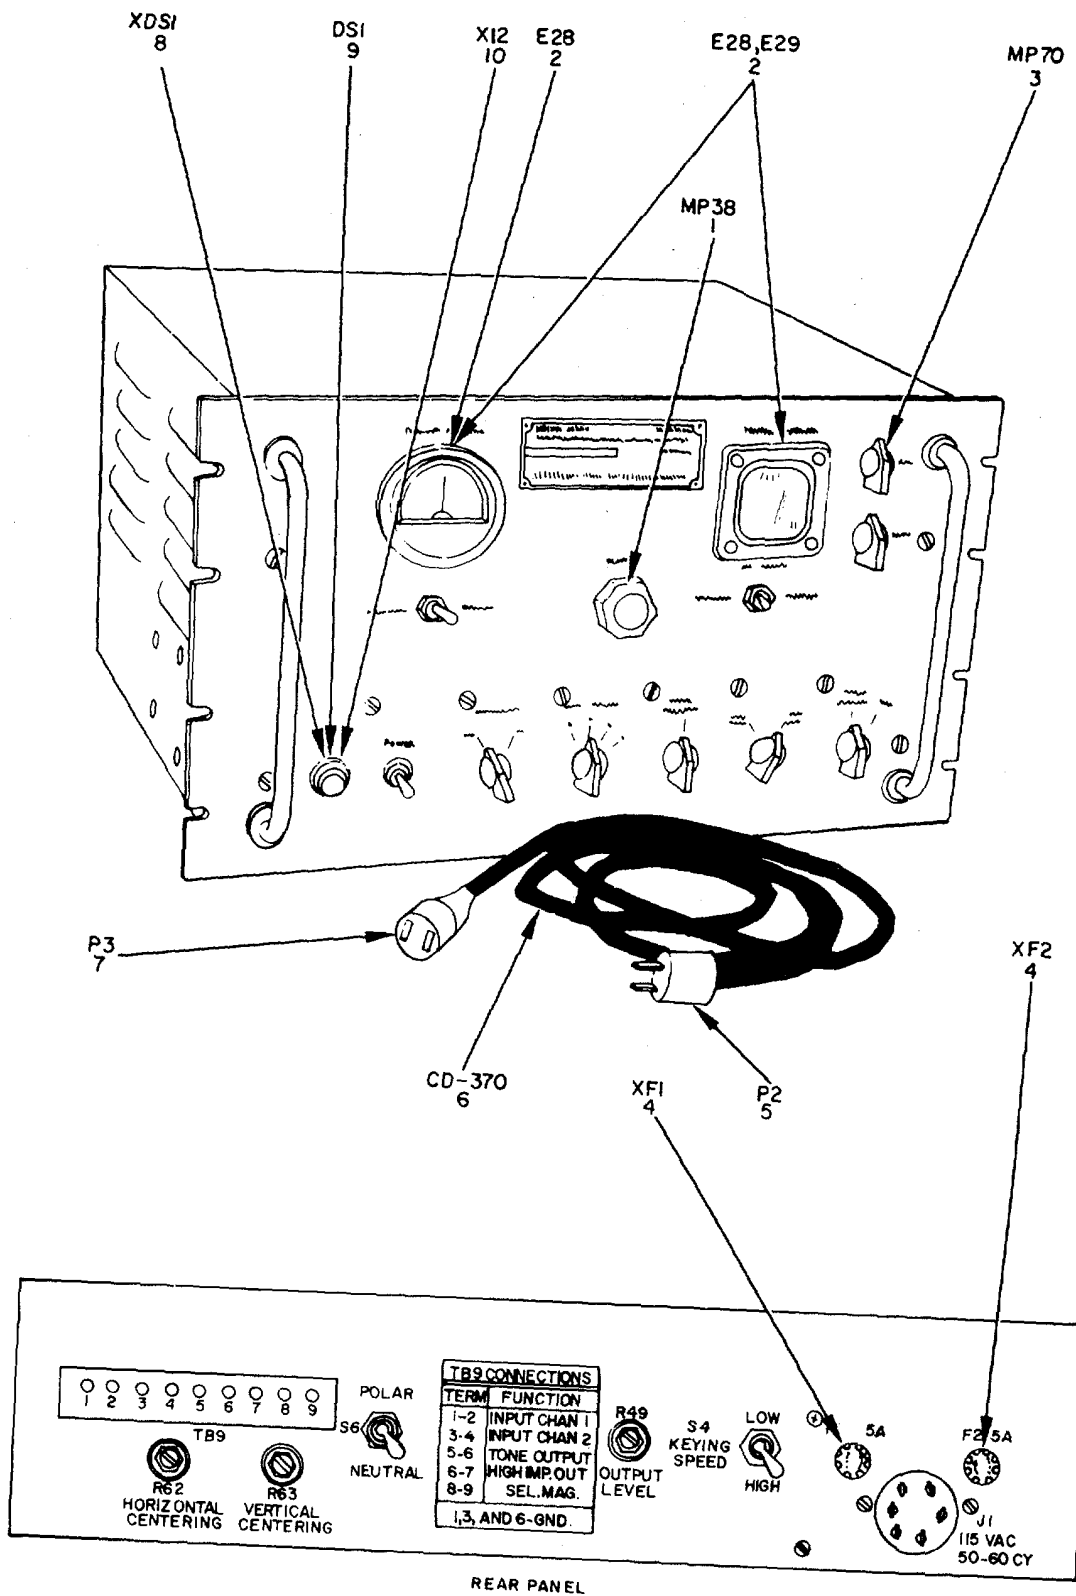


Figure 1. CV-305/U Converter.

SECTION II

TM 11-5815-258-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 00 CV-305/U CONVERTER		
1	1	PAOZZ	5355-00-545-7586	S385-388	75376	KNOB.....	EA	1
1	2	XDOZZ	5999-00-283-7178	342003-2	75915	CAP,ELECTRICAL	EA	2
1	3	PAOZZ	5355-00-341-2477	S292-3LBB	75376	KNOB.....	EA	7
1	4	PAFZZ	5920-00-556-0144	342003	75915	FUSEHOLDER	EA	2
1	5	PAFZZ	5935-00-149-4013	K7057	75454	CONNECTOR,PLUG,ELECTRLCAL	EA	1
1	6	PAFZZ	6145-00-284-0063	3930	81349	CABLE,POWER,ELECTRICAL.....	EA	1
1	7	PAFZZ	5935-00-295-5361	7259	74545	CONNECTOR,PLUG,ELECTRICAL	EA	1
1	8	PAFZZ	6210-00-510-7518	81410-431	72619	LAMPHOLDER	EA	1
1	9	PAOZZ	6240-00-155-8706	47	24446	LAMP INCANDESCENT CLEAR.....	EA	1
1	10	PAOZZ	6210-00-299-3916	431	72619	LENS,LAMP	EA	1

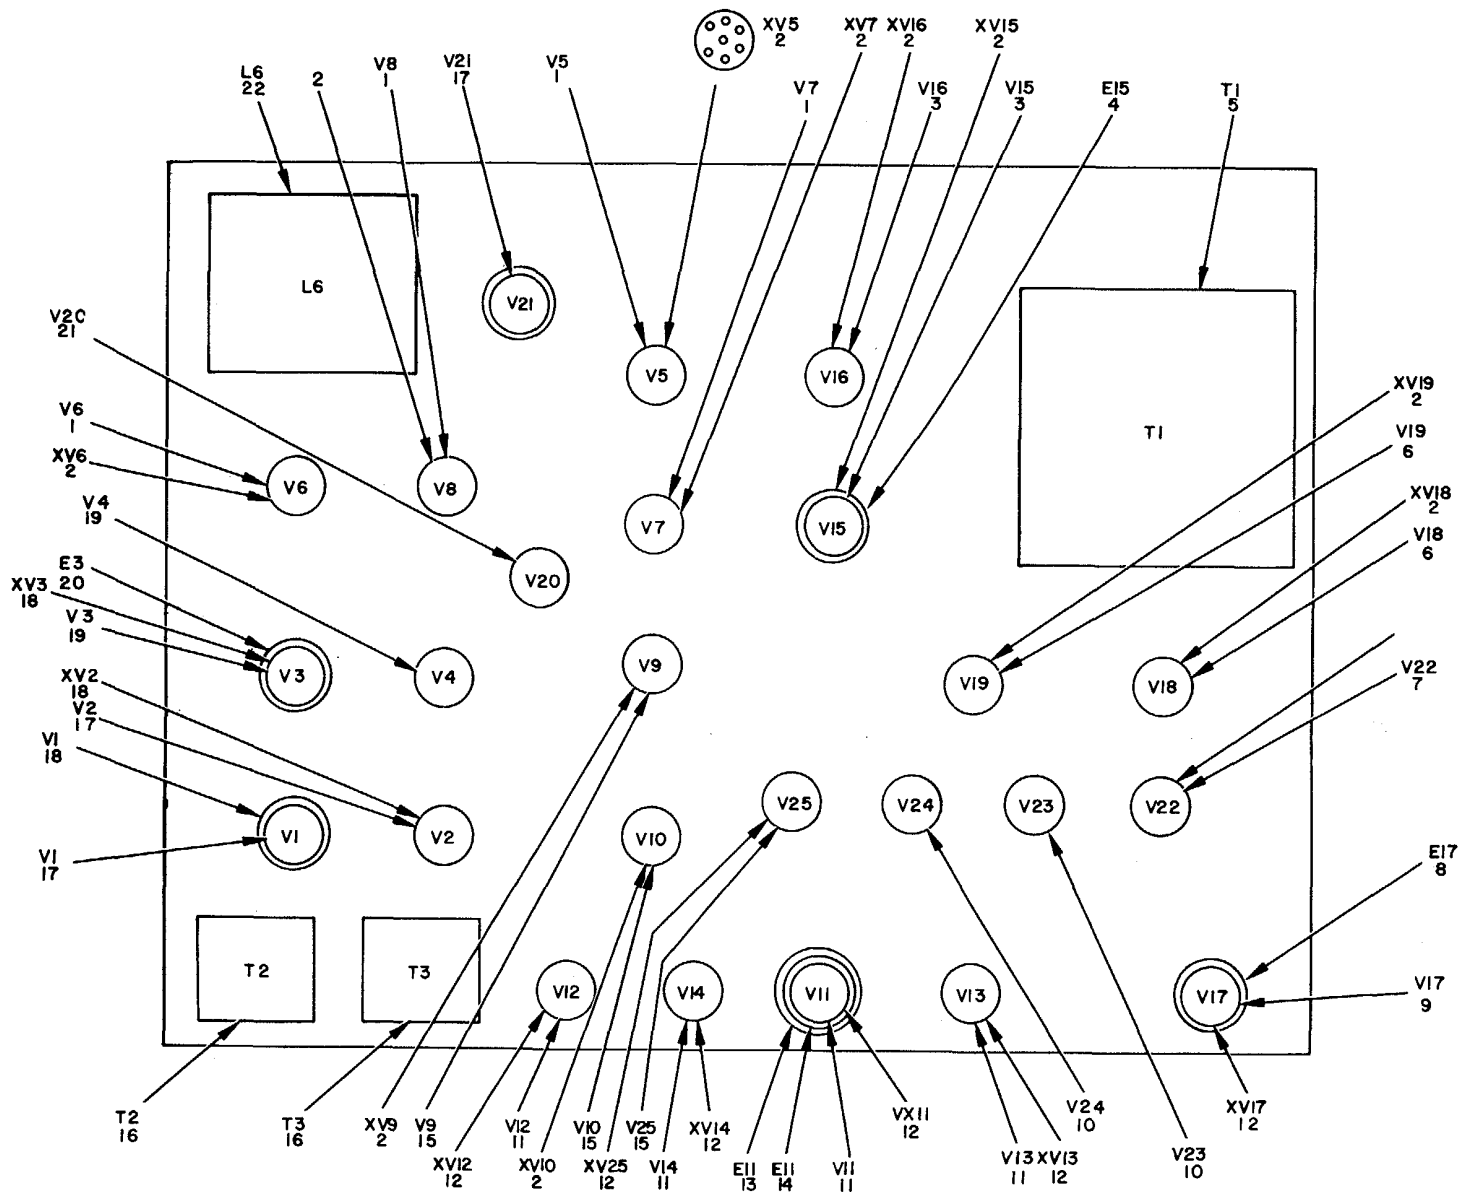


Figure 2. CV-305/U Converter, tubes and transformers.

ELOHNO02

SECTION II

TM 11-5815-258-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
2	1	PAOZZ	5960-00-879-5078	5726-6AL5W	81349	ELECTRON TUBE	EA	4
2	2	PAFZZ	5935-00-260-0516	TS102P01	81349	SOCKET,ELECTRON TUBE	EA	12
2	3	PAOZZ	5960-00-272-9182	6X4WA	81349	ELECTRON TUBE	EA	2
2	4	PAOZZ	5960-00-264-3004	TS103V02	81349	SHIELD,ELECTRON TUBE	EA	7
2	5	PAFZZ	5950-00-543-0521	SMC106933	80063	TRANSFORMER,POWER,STEP DOWN AND STEP UP	EA	1
2	6	PAOZZ	5960-00-624-4718	082WA	81349	ELECTRON TUBE	EA	2
2	7	PAOZZ	5960-00-262-0152	6AU6WA	81349	ELECTRON TUBE	EA	1
2	8	PAOZZ	5960-00-264-9506	4VT	97983	RETAINER,ELECTRON TUBE	EA	1
2	9	PAOZZ	5960-00-262-1703	SR4WGA	81349	ELECTRON TUBE	EA	1
2	10	PAOZZ	5960-00-166-7664	12AX7	81349	ELECTRON TUBE	EA	2
2	11	PAOZZ	5960-00-E14-3808	6Y6C	81349	ELECTRON TUBE	EA	4
2	12	PAFZZ	5935-ao-063-5789	TS101P01	81349	SOCKET,ELECTRON TUBE	EA	5
2	13	PAOZZ	5960-00-273-2432	4Y	97983	RETAINER,ELECTRON TUBE	EA	4
2	14	PADZZ	5960-00-729-8150	MS24233-3	96906	SHIELD,ELECTRON TUBE	EA	4
2	15	PAFZZ	5960-00-262-0160	6J6WA	81349	ELECTRON TUBE	EA	3
2	16	PAFZZ		130016	82066	TRANSFORMER,AUDIO FREQUENCY	EA	2
2	17	PAOZZ	5960-00-166-7663	12AU7	81349	ELECTRON TUBE	EA	3
2	18	PAFZZ	5935-00-222-9828	TS103P01	81349	SOCKET,ELECTRON TUBE	EA	7
2	19	PAOZZ	5960-00-262-0167	12ATTWA	81349	ELECTRON TUBE	EA	2
2	20	XDOZZ	5960-00-860-7709	TS102U32	81349	SHIELD,ELECTRON TUBE	EA	2
2	21	PAOZZ	5960-00-170-4573	2BP1	81349	ELECTRON TUBE	EA	1
2	22	PAFZZ	5950-00-645-7663	SMC106934	80063	REACTOR.....	EA	1

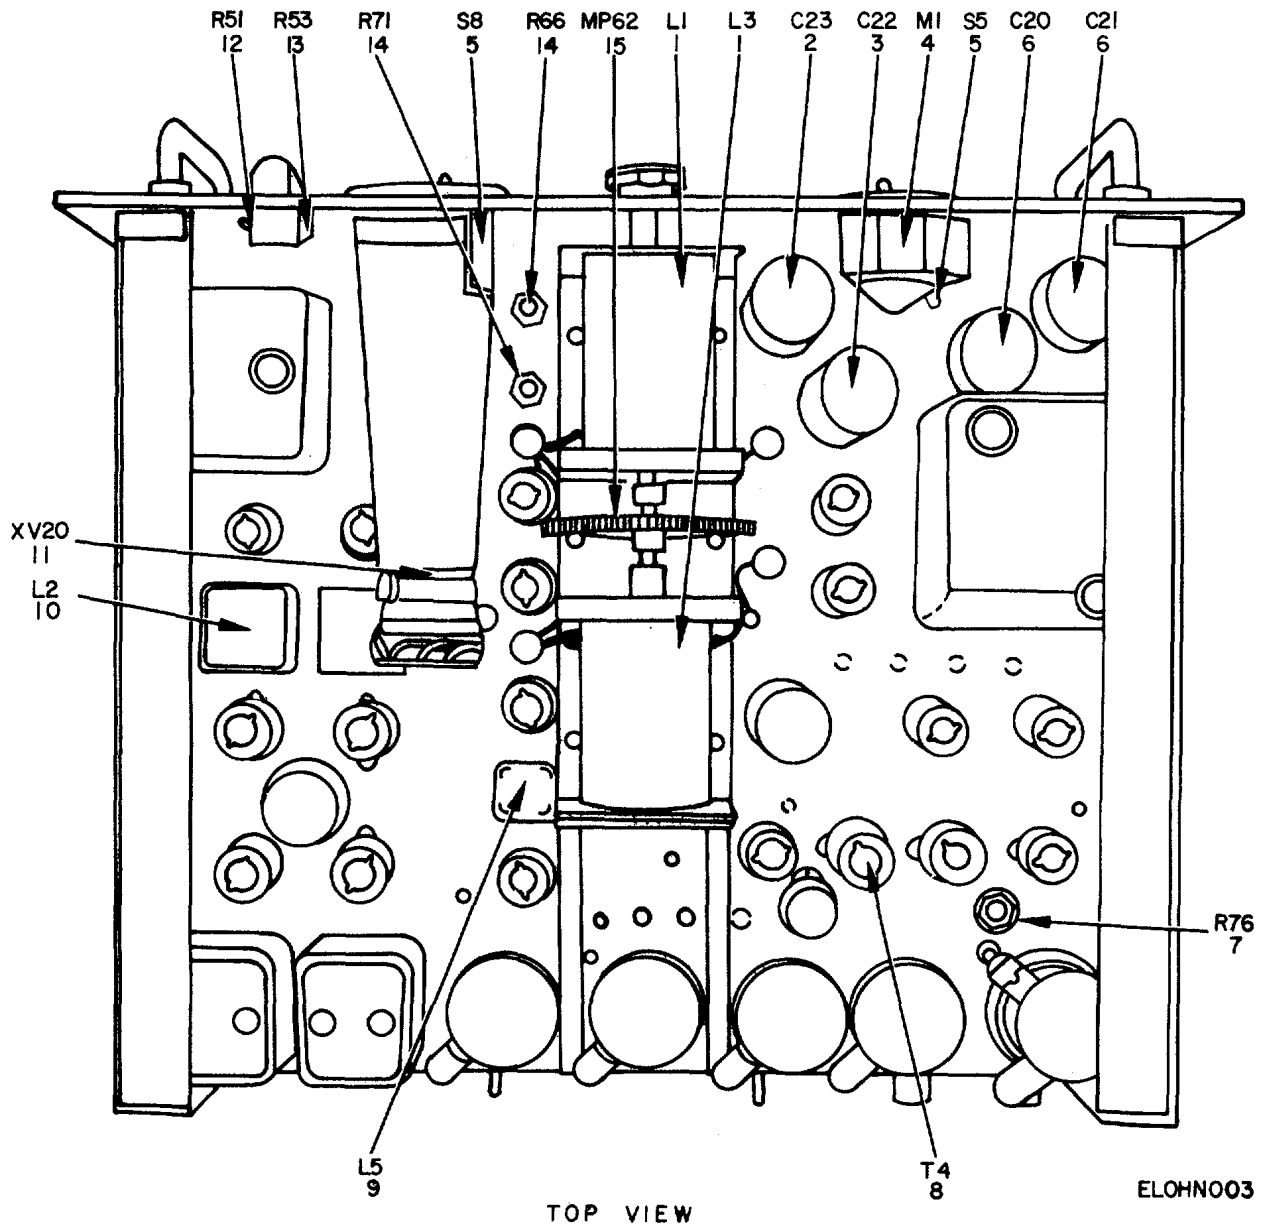


Figure 3. CV-305/U Converter, top view.

SECTION II

TM 11-5815-258-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
3	1	PAFZZ		SMC1069372	80063	REACTOR	EA	2
3	2	PAFZZ	5910-00-854-6853	CE42C3508	81349	CAPACITOR, FIXED, ELECTROLYTIC	EA	1
3	3	PAFZZ	5910-00-543-9476	CE41C900Q	81349	CAPACITOR, FIXED, ELECTROLYTIC	EA	1
3	4	PAFOL	6625-00-682-4665	MR26W1H1 DCMA	81349	AMMETER	EA	1
3	5	PAFZZ	5930-00-254-9289	ST52N	80058	SWITCH, TOGGLE	EA	2
3	6	PAFZZ	5910-00-858-512	CE4P1F100R	81349	CAPACITOR, FIXED, ELECTROLYTIC	EA	2
3	7	PAFZZ	5905-00-665-4992	RV4LAYS 104A	81349	RESISTOR, VARIABLE	EA	1
3	8	PAFZZ	5950-00-645-5162	TFIA13YY	81349	TRANSFORMER, AUDIO FREQUENCY	EA	1
3	9	PAFZZ	5950-00-645-9115	SM8106938	80063	REACTOR	EA	1
3	10	PAFZZ	5915-00-889-4441	SMC106936	80063	REACTOR TRANSFORMER	EA	2
3	11	PAFZZ	5935-00-240-8166	9470-12	71785	SOCKET, ELECTRON TUBE	EA	1
3	12	PAFZZ	5905-00-552-2265	RV4NAYSD 105A	81349	RESISTOR, VARIABLE	EA	1
3	13	PAFZZ	5905-00-552-5476	RV4NAYSD 254A	81349	RESISTOR, VARIABLE	EA	1
3	14	PAFZZ	5905-00-518-5593	RV4NAYSA 504A	81349	RESISTOR, VARIABLE	EA	2
3	15	PAFZZ	3020-00-251-1047	G186	71041	GEAR BRASS	EA	1


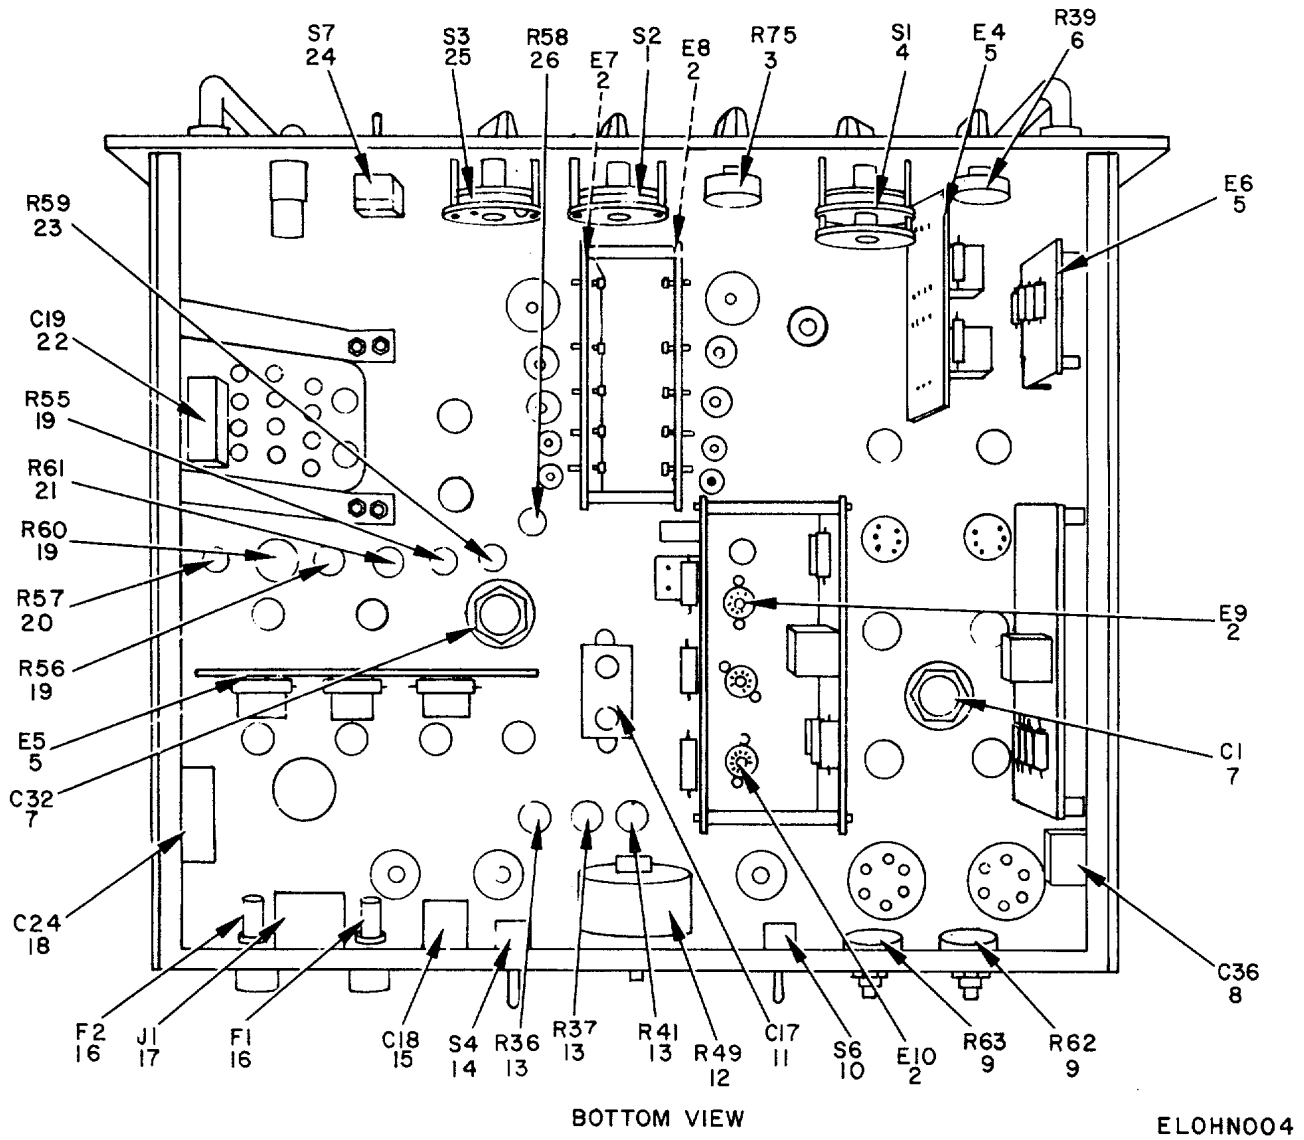


Figure 4. CV-305/U Converter, bottom view.

SECTION II

TM 11-5815-258-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
4	1	PAFZZ	5930-00-503-3589	221206H2C	76854	SWITCH,ROTARY.....	EA	1
4	2	PAOZZ		TS102U00	81349	SHIELD,ELECTRON TUBE	EA	4
4	3	PAFZZ	5905-00-643-5626	RV4NAYD5052A	81349	RESISTCR,VARIABLE	EA	1
4	4	PAFZZ	5930-00-503-3589	221207HIC	76854	SWITCH,ROTARY.....	EA	1
4	5	XDOZZ		TS102U32	81349	SHIELD,ELECTRON TU8E	EA	2
4	6	PAFZZ	5905-00-665-4899	RV4NAYSD154A	81349	RESISTOR,VARIA8LE	EA	1
4	7	PAFZZ	5910-00-927-0778	CE42C100Q	81349	CAPACITOR,FIXED,ELECTROLYTIC	EA	2
4	8	PAFZZ	5910-00-270-5121	CP5481EB10SK	81349	CAPACITOR,FIXED,PAPER DIELECTRIC	EA	1
4	9	PAFZZ	5905-00-889-0207	RV4NAYSA10SA	81349	RESISTOR,VARIABLE.....	EA	2
4	10	PAFZZ	5930-00-655-1515	MS35058-23	81349	SWITCH,TOGGLE.....	EA	1
4	11	PAFZZ	5910-00-112-6794	CP54BIEF104K	81349	CAPACITOR,FIXED,PAPER DIELECTRIC	EA	1
4	12	PAFZZ	5905-00-553-2497	RP201SA103KK	81349	RESISTOR,VARIABLE.....	EA	1
4	13	PAFZZ	5905-00-665-6340	RW33V102	81349	RESISTOR,FIXED,WIRE WOUND	EA	3
4	14	PAFZZ	5930-00-254-9289	ST52N	80058	SWITCH,TCGGLE.....	EA	1
4	15	PAFZZ	5910-00-126-9170	CP54BIEF504K	81349	CAPACITOR,FIXED,PAPER DIELECTRIC	EA	1
4	16	PAOZZ	5920-00-060-2424	F02G5ROOA	81349	FUSE,CARTRIDGE.....	EA	2
4	17	PAFZZ	5935-00-241-1979	4897	74545	CCNNECTOR,RECEPTACLE,ELECTRICAL.....	EA	1
4	18	PAFZZ	5910-00-112-7260	CP5384EF504V	81349	CAPACITOR,FIXEO,PAPER DIELECTRIC	EA	1
4	19	PAFZZ	5905-00-812-9627	RW33V802	81349	RESISTOR,FIXED,WIRE WOUND	EA	3
4	20	PAFZZ	5905-00-2843609	RW32V103	81349	RESISTCR,FIXEC,WIRE WOUND.....	EA	1
4	21	PAFZZ	5905-00-642-3768	RW33V252	81349	RESISTOR,FIXED,WIRE WOUND	EA	1
4	22	PAFZZ	5910-00-280-7686	CP54BIEG504K	81349	CAPACITOR,FIXED,PAPER DIELECTRIC	EA	1
4	23	PAFZZ	5905-00-279-2019	RC20GF502J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
4	24	PAFZZ	5930-00-655-1575	MS35059-22	81349	SWITCH,TOGGLE.....	EA	1
4	25	PAFZZ		221206H1C	76854	SWITCH,ROTARY.....	EA	1
4	26	PAFZZ	5905-00-107-8925	0377	02642	RESISTOR,ADJUSTABLE.....	EA	1

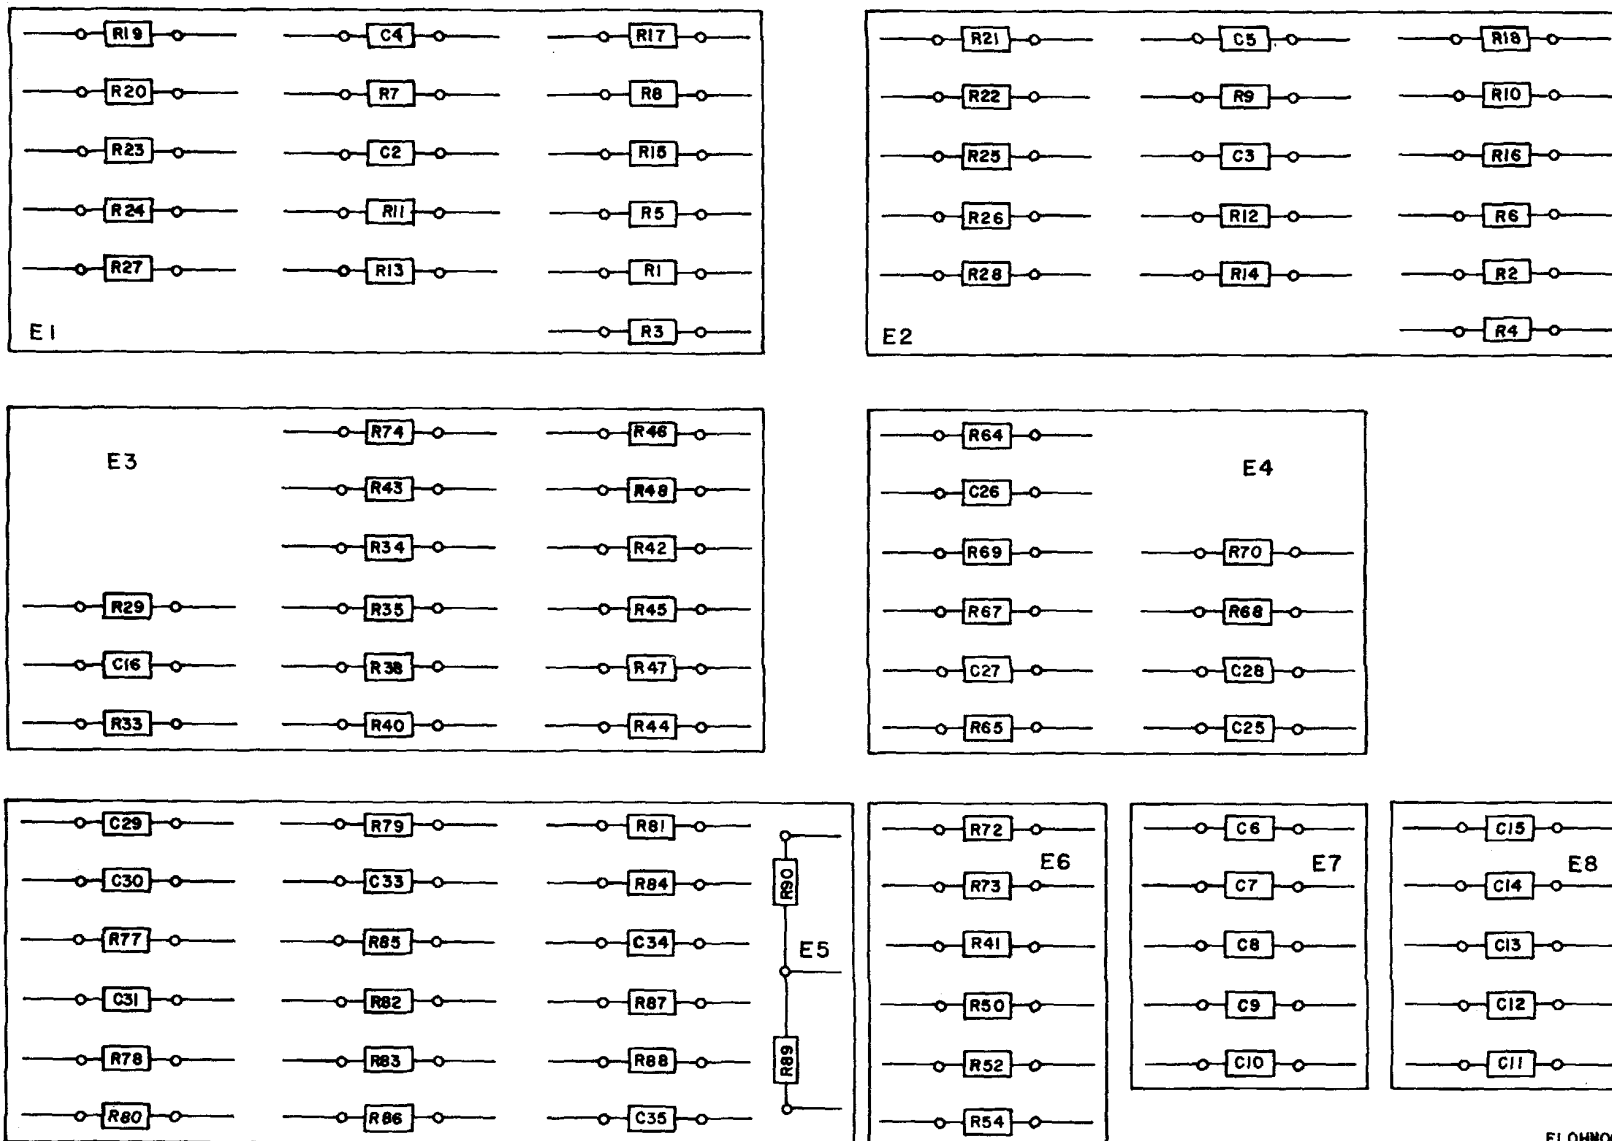

ELOHNO05

Figure 5. CV-305/U Converter, capacitors and resistors (Sheet 1 of 2).

REF DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C2	1	C29	8	R14	11	R38	13	R72	25
C3	1	C30	8	R15	12	R40	13	R73	26
C4	1	C31	9	R16	12	R41	13	R74	27
C5	1	C33	7	R17	13	R42	19	R77	28
C6	2	C34	7	R18	13	R43	19	R78	29
C7	3	C35	7	R19	15	R44	13	R79	30
C8	4	R1	10	R20	16	R45	20	R80	31
C9	5	R2	11	R21	15	R46	20	R81	32
C10	6	R3	11	R22	16	R47	21	R82	33
C11	2	R4	11	R23	11	R48	22	R83	13
C12	3	R5	12	R24	11	R50	23	R84	34
C13	4	R6	12	R25	11	R52	11	R85	35
C14	5	R7	13	R26	11	R54	13	R86	35
C15	6	R8	14	R27	17	R64	23	R87	11
C16	7	R9	13	R28	17	R65	23	R88	11
C25	7	R10	14	R29	13	R67	13	R89	36
C26	7	R11	15	R33	13	R68	24	R90	15
C27	7	R12	15	R34	18	R69	13		
C28	7	R13	11	R35	13	R70	24		

ELOHN006

Figure 5. CV-305/U Converter, capacitors and resistors (Sheet 2 of 2).

SECTION II

TM 11-5815-258-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
5	1	PAFZZ	5910-00-101-4676	CM35B562K	81349	CAPACITOR, FIXED, MICA DIELECTRIC.....	EA	4
5	2	PAFZZ	5910-00-084-0823	SM8106962-1	80063	CAPACITOR, FIXED, PLASTIC DIELECTRIC.....	EA	2
5	3	PAFZZ	5910-00-084-0822	SMB106962-2	80063	CAPACITOR, FIXED, PLASTIC DIELECTRIC.....	EA	2
5	4	PAFZZ	5910-00-0B4-0821	SMB106962-3	80063	CAPACITOR, FIXED, PLASTIC DIELECTRIC.....	EA	2
5	5	PAFZZ	5910-00-084-3279	SMB106962-4	80063	CAPACITOR, FIXED, PLASTIC DIELECTRIC.....	EA	2
5	6	PAFZZ	5910-00-084-3278	SMB106962-5	80063	CAPACITOR, FIXED, PLASTIC DIELECTRIC.....	EA	2
5	7	PAFZZ	5910-00-712-6166	CM35C103K	81349	CAPACITOR, FIXED, MICA DIELECTRIC.....	EA	8
5	8	PAFZZ	5910-00-101-4906	CM20C431J	81349	CAPACITOR, FIXED, MICA DIELECTRIC.....	EA	2
5	9	PAFZZ	5910-00-101-5616	CM20C101J	81349	CAPACITOR, FIXED, MICA DIELECTRIC.....	EA	1
5	10	PAFZZ	5905-00-192-3981	RC20GF124J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	11	PAFZZ	5905-00-279-2516	RC20GF514J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	12
5	12	PAFZZ	5905-00-279-1887	RC20GF242K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	4
5	13	PAFZZ	5905-00-192-3987	RC20GF104K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	15
5	14	PAFZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	15	PAFZZ	5905-00-409-7616	RC20GF105K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	5
5	16	PAFZZ	5905-00-249-3661	RC2GGF683J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	17	PAFZZ	5905-00-279-2593	RC20GF241J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	18	PAFZZ	5905-00-171-1977	RC42GF303J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	19	PAFZZ	5905-00-254-7708	RC42GF513J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	20	PAFZZ	5905-00-299-2003	RC32GF104J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	21	PAFZZ	5905-00-254-7100	RC20GF913J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	22	PAFZZ	5905-00-299-2005	RC32GF823J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	23	PAFZZ	5905-00-279-2512	RC20GF245J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	3
5	24	PAFZZ	5905-00-245-0023	RC20GF682K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	25	PAFZZ	5905-00-192-0651	RC07GF203K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	26	PAFZZ	5905-00-192-0651	RC42GF203J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	27	PAFZZ	5905-00-279-2019	RC20GF512T	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	28	PAFZZ	5905-00-279-3495	RC20GF753J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	29	PAFZZ	5905-00-114-5378	RC20GF164J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	30	PAFZZ	5905-00-400-4482	RC32GF333K	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	31	PAFZZ	5905-00-190-8880	RC20GF122J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	32	PAFZZ	5905-00-299-1999	RC32GF154J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	33	PAFZZ	5905-00-279-2652	RC32GF1SSJ	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	34	PPAFZZ	5905-00-171-2004	RC20GF223J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1
5	35	PAFZZ	5905-00-279-3504	RC20GF472J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	2
5	36	PAFZZ	5905-00-121-9B61	RC32GF102J	81349	RESISTOR, FIXED, COMPOSITION.....	EA	1

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5920-00-060-2424	4	16	5960-00-272-9182	2	3
5935-00-063-5789	2	12	5960-00-273-2432	2	13
5910-00-084-0821	5	4	5905-00-279-1887	5	12
5910-00-084-0822	5	3	5905-00-279-2019	5	27
5910-00-084-0823	5	2	5905-00-279-2512	5	23
5910-00-084-3278	5	6	5905-00-279-2516	5	11
5910-00-084-3279	5	5	5905-00-279-2593	5	17
5910-00-101-5616	5	9	5905-00-279-2652	5	33
5905-00-107-8925	4	26	5905-00-279-3495	5	28
5910-00-112-6794	4	11	5905-00-279-3504	5	35
5910-00-112-7260	4	18	5910-00-280-7686	4	22
5960-00-114-3808	2	11	6145-00-284-0063	1	6
5910-00-126-9170	4	15	5905-00-284-3609	4	20
5935-00-149-4013	1	5	5935-00-295-5361	1	7
6240-00-155-8706	1	9	5905-00-299-1999	5	32
5960-00-166-7663	2	17	5905-00-299-2003	5	20
5960-00-166-7664	2	10	5905-00-299-2005	5	22
5960-00-170-4573	2	21	6210-00-299-3916	1	10
5905-00-171-1977	5	18	5355-00-341-2477	1	3
5905-00-171-2004	5	34	5905-00-409-7616	5	15
5905-00-185-8518	5	14	5930-00-503-3589	4	1
5905-00-190-8880	5	31	5930-00-503-3589	4	4
5905-00-192-0651	5	25	6210-00-510-7518	1	8
5905-00-192-0651	5	26	5905-00-518-5593	3	14
5905-00-192-3981	5	10	5950-00-543-0521	2	5
5905-00-192-3987	5	13	5905-00-552-2265	3	12
5935-00-222-9828	2	18	5905-00-552-5476	3	13
5935-00-240-8166	3	11	5960-00-624-4718	2	6
5935-00-241-1979	4	17	5905-00-643-5626	4	3
5905-00-245-0023	5	24	5950-00-645-5162	3	8
5905-00-249-3661	5	16	5950-00-645-9115	3	9
5905-00-254-7100	5	21	5930-00-655-1515	4	10
5905-00-254-7708	5	19	5930-00-655-1575	4	24
5935-00-260-0516	2	2	5905-00-665-4899	4	6
5960-00-262-0152	2	7	5905-00-665-4992	3	7
5960-00-262-0160	2	15	5905-00-665-6340	4	13
5960-00-262-0167	2	19	6625-00-682-4665	3	4
5960-00-262-1703	2	9	5960-00-729-8150	2	14
5960-00-264-3004	2	4	5905-00-812-9627	4	19
5960-00-264-9506	2	8	5915-00-889-4441	3	10
5910-00-270-5121	4	8			

PART NUMBER	FSCM	FIG. NO.	ITEM. NO.	PART NUMBER	FSCM	FIG. NO.	ITEM. NO.
CE4IC900Q	81349	3	3	RC20GF682K	81349	5	24
CE41F1ODR	81349	3	6	RC20GF683J	81349	5	16
CE42C1OOQ	81349	4	7	RC20GF753J	81349	5	28
CE42C350Q	81349	3	2	RC20GF913J	81349	5	21
CM20CLOIJ	81349	5	9	RC32GF102J	81349	5	36
CM2OC431J	81349	5	8	RC32GF104J	81349	5	20
CM35B562K	81349	5	1	RC32GF154J	81349	5	32
CM35CI03K	81349	5	7	RC32GF155J	81349	5	33
CP53B4EF504V	81349	4	18	RC32GF333K	81349	5	30
CP54BiEBIOSK	81349	4	8	RC32GF823J	81349	5	22
CP54BIEF104K	81349	4	11	RC42GF203	81349	5	26
CP54BIEF504K	81349	4	15				
CP54BIEG504K	81349	4	22	RC42GF303J	81349	5	18
F02G5ROOA	81349	4	16	RC42GF513J	81349	5	19
G186	71041	3	15	RP201SA103KK	81349	4	12
K7057	75454	1	5	RV4LAYSAL04A	81349	3	7
MR26WIHIDCMA	81349	3	4	RV4NAYSA105A	81349	4	9
MS35058-23	81349	4	10	RV4NAYSA504A	81349	3	14
MS35059-22	81349	4	24	RV4NAYSALO5A	81349	3	12
				RV4NAYS154A	81349	4	6
				RV4NAYS254A	81349	3	13
				RV4NAYS502A	81349	4	3
RC07GF203K	81349	5	25	RW32ViO3	81349	4	20
RC20GF103K	81349	5	14	RW33V102	81349	4	13
RC20GF104K	81349	5	13	RW33V252	81349	4	21
RC20GF105K	81349	5	15	RW33V802	81349	4	19
RC20GF122J	81349	5	31	SMB106938	80063	3	9
RC20GF124J	81349	5	10	SMB106962-1	80063	5	2
RC20GF164J	81349	5	29	SMB106962-2	80063	5	3
RC20GF223J	81349	5	34	SMB106962-3	80063	5	4
RC20GF241J	81349	5	17	SMB106962-4	80063	5	5
RC20GF242K	81349	5	12	SMB106962-5	80063	5	6
RC20GF245J	81349	5	23	SMC106933	80063	2	5
RC20GF472J	81349	5	35	SMC106934	80063	2	22
RC20GF502J	81349	4	23				
RC20GF512J	81349	5	27				
RC20GF514J	81349	5	11				

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMC106936	80063	3	10	2BP1	81349	2	21
SMC1069372	80063	3	1	221206H1C	76854	4	25
ST52N	80058	3	5	221206H2C	76854	4	1
ST52N	80058	4	14	221207H1C	76854	4	4
S292-3LBB	75376	1	3	342003	75915	1	4
S385-3BB	75376	1	1	342003-2	75915	1	2
TF1A13YY	81349	3	8	393C	81349	1	6
TS101P01	81349	2	12	4VT	97983	2	8
TS102P01	81349	2	2	4Y	97983	2	13
TS102U01	81349	4	2	431	72619	1	10
				47	24446		9
TS102U32	81349	2	20	4897	74545	4	17
TS102U32	81349	4	5	5R4WGA	81349	2	9
TS103P01	81349	2	18	5726-6AL5W	81349	2	1
TS103V02	81349	2	4	6AU6WA	81349	2	7
0B2WA	81349	2	6	6JEWA	81349	2	15
0377	02642	4	26	6Y4WA	81349	2	3
12ATTWA	81349	2	19	6Y6C	81349	2	11
12AU7	81349	2	17	7259	74545	1	7
12AX7	81349	2	10	81410-431	72619	1	8
130016	82066	2	16	9470-12	71785	3	11

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-101-4676	5	1
5910-00-101-4906	5	8
5905-00-114-5378	5	29
5905-00-121-9861	5	36
3020-00-251-1047	3	15
5930-00-254-9289	3	5
5930-00-254-9289	4	14
5905-00-279-2019	4	23
5999-00-283-7178	1	30
5910-00-543-9476	3	3
5355-00-545-7586	1	1
5905-00-553-2497	4	12
5920-00-556-0144	1	4
5905-00-642-3768	4	21
5950-00-645-7663	2	22
5910-00-712-6166	5	7
5910-00-854-6853	3	2
5910-00-858-5128	3	
5960-00-860-7709	2	20
5960-00-879-5078	2	1
5905-oQ7s9-0Q20	4	9
5910-00-927-0778	4	7

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG NO	ITEM NO
MS24233-3	96906	2	14

By Order of the Secretary of the Army:

Official:

J. C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Distribution:

Active Army:

HISA (Ft Monmouth) (26)
USAINSCOM (2)
COE (1)
TSG (1)
USAARENBD (1)
DARCOM (1)
TRADOC (2)
OS Maj Comd (4)
TECOM (2)
USACC (4)
MDW (1)
Armies (2)
Corps (2)
Svc Colleges (1)
USASIGS (5)
USAADS (2)
USAFAS (2)
USAARMS (2)
USAES (2)
USAIS (2)
USAICS (2)

ARNG: NONE

USAR: NONE

For explanation of abbreviations used, See AR 310-50.

MAAG 9 (1)
USARMIS (1)
USAERDAA (1)
USAERDAW (1)
Ft Carson (5)
Ft Gordon (10)
Ft Gillem (10)
Ft Huachuca (10)
Ft Richardson (CERCOM Ofc) (2)
Army Dep (1) except
LBAD (14)
SAAD (30)
SHAD (3)
TOAD (14)
USA Dep (1)
Sig Sec USA Dep (1)
Units Org Under Fol TOE:
29-207
29-610 (2 copies each)
29-134
29-136 (1 copy each)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



*THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS FORM.
CAREFULLY TEAR IT OUT, FOLD IT
AND DROP IT IN THE MAIL.*

SOMETHING WRONG WITH PUBLICATION

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

PUBLICATION DATE

PUBLICATION TITLE

BE EXACT PIN-POINT WHERE IT IS

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

IN THIS SPACE, TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT.

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

PIN: 010046