

TM 11-6125-258-34P

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE

REPAIR PARTS AND SPECIAL TOOLS LISTS

FOR

INVERTER, STATIC, POWER PP-7274B/A

(NSN 6125-00-148-8342)

HEADQUARTERS, DEPARTMENT OF THE ARMY

JUNE 1980

TECHNICAL MANUAL }
 No. 11-6125-258-34P }

HEADQUARTERS
 DEPARTMENT OF THE ARMY
 WASHINGTON, DC, 25 June 1980

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE
 REPAIR PARTS AND SPECIAL TOOLS LISTS
 FOR
 INVERTER, STATIC, POWER PP-7274B/A
 (NSN 6125-00-148-8342)
 Current as of 4 February 1980

REPORTING OF ERRORS

You can help improve this manual. If you find any mistakes or know of a way to improve the procedures, please let us know. Mail your DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications and Electronics Materiel Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703.

In either case, a reply will be furnished direct to you.

SECTION		Page	Illus Figure
	I. INTRODUCTION	1	
	II. Repair Parts List	5	
GROUP	00 Inverter, Static, Power PP-7274B/A		
	Inverter Power Supply, Final Assembly.	5	1
	Pulser Assembly A1	9	2
	Capacitor Assembly A12	11	3
	Inverter Assembly A2	15	4
	Resistor Assembly A23, Capacitor Assembly A27B, and Capacitor Assembly A27A or A27C.	19	5
	Printed Circuit Assembly A25	21	6
	Printed Circuit Assembly A26	25	7
	Regulator Assembly A28 and Capacitor Assembly A29	29	8
SECTION	III. Special Tools List (Not applicable)		
	IV. National Stock Number and Part Number Index	30	

SECTION I INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of direct support and general support maintenance of the PP-7274B/A. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage.
AH	Item to be assembled at general support maintenance level.
XA	Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.
XB	Item is not procured or stocked. If not available through salvage, requisition.
XD	A support item that is not stocked. When required,

Code

Definition

item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
H	Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
H	The lowest maintenance level capable of complete repair of the support item is the general support level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability codes</i>	<i>Definition</i>
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
H	Reparable item, When uneconomically repairable, condemn and dispose at the general support level.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design

and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM).

The FSCM is a 5-digit numeric code listed in SB 708-41-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisition.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

a. Detailed assembly instructions for items source coded to be assembled are found in TM 11-6125-258-34. Assembly components are listed immediately following the item to be assembled.

b. The following publications pertain to the PP-7274B/A and its components:

TM 11-6125-258-34, Inverter, Static, Power PP-7274B/A.

c. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will

be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-MM, Fort Monmouth, New Jersey 07703 for the part required to support your equipment.

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for fictional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4.)


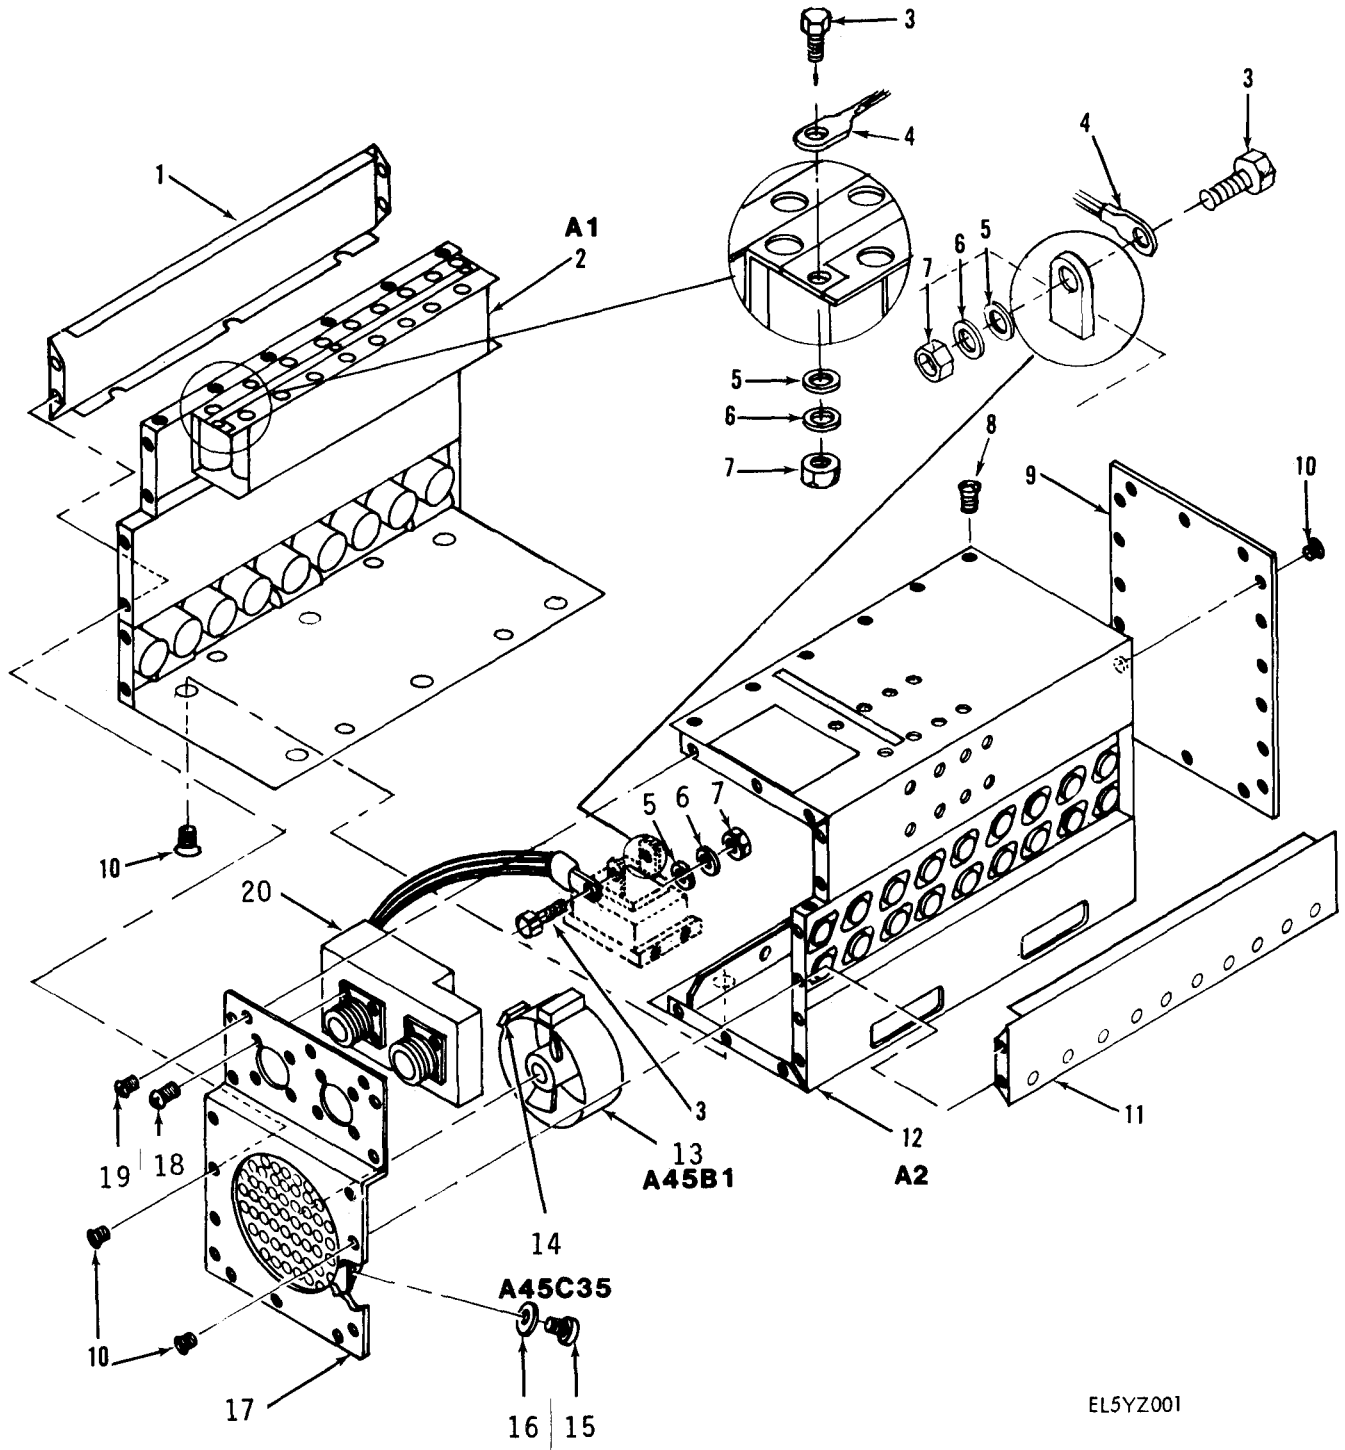


Figure 1. Inverter, Static, Power PP-7274B/A, Inverter Power Supply, Final Assembly

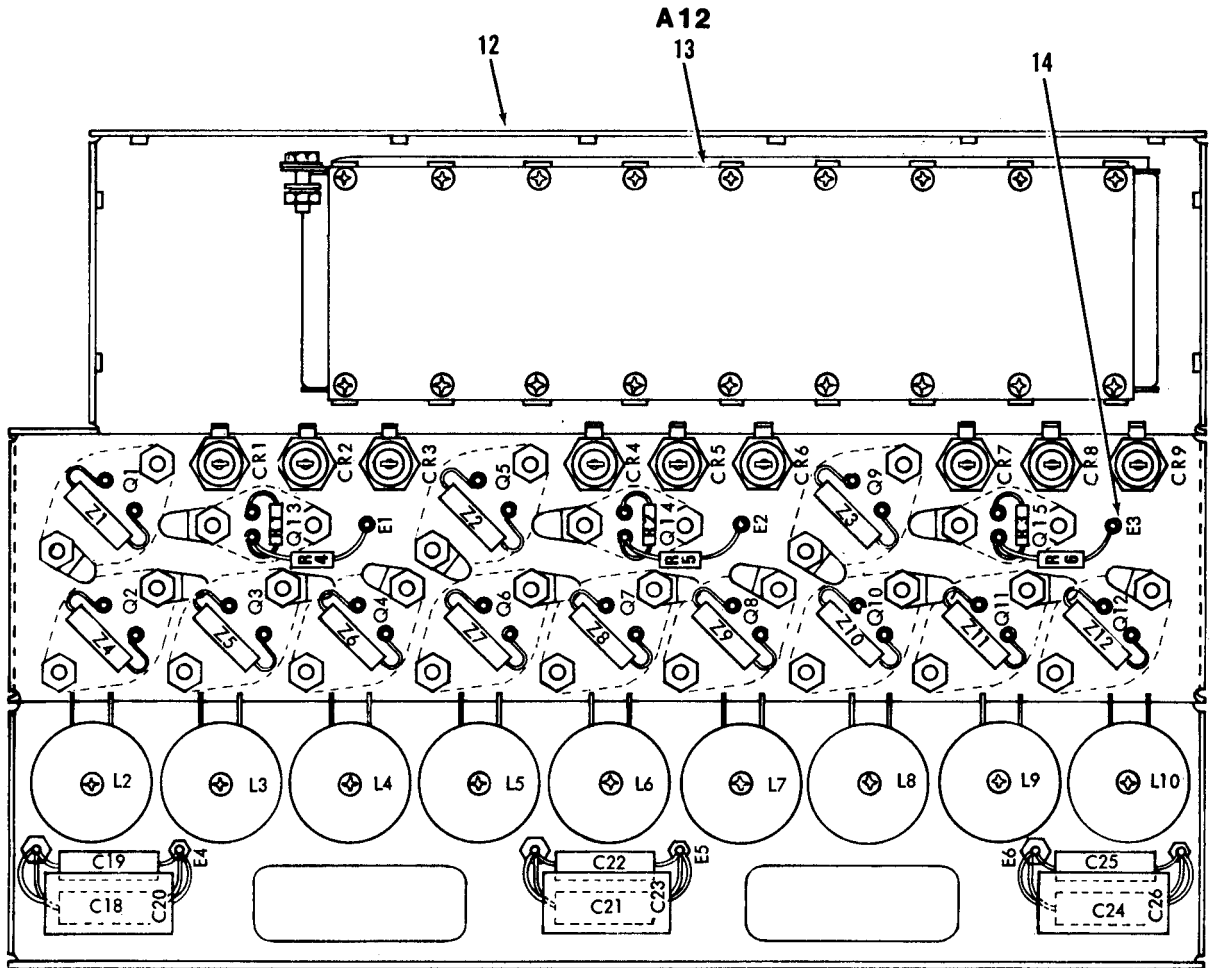

LEGEND

REF DES	ITEM NO.	REF DES	ITEM NO.	REF DES	ITEM NO.	REF DES	ITEM NO.
C18	1	CR7	3	Q4	6	R4	9
C19	1	CR8	3	Q5	5	R5	9
C20	2	CR9	3	Q6	6	R6	9
C21	1	L2	4	Q7	6	Z1	10
C22	1	L3	4	Q8	6	Z2	10
C23	2	L4	4	Q9	5	Z3	10
C24	1	L5	4	Q10	6	Z4	11
C25	1	L6	4	Q11	6	Z5	11
C26	2	L7	4	Q12	6	Z6	11
CR1	3	L8	4	Q13	7	Z7	11
CR2	3	L9	4	Q14	7	Z8	11
CR3	3	L10	4	Q15	7	Z9	11
CR4	3	Q1	5	R1	8	Z10	11
CR5	3	Q2	6	R2	8	Z11	11
CR6	3	Q3	6	R3	8	Z12	11

EL5YZ002

NOTE: PREFIX ALL REFERENCE DESIGNATORS WITH AI

Figure 2. Pulsar Assembly A1 (Sheet 1 of 2)


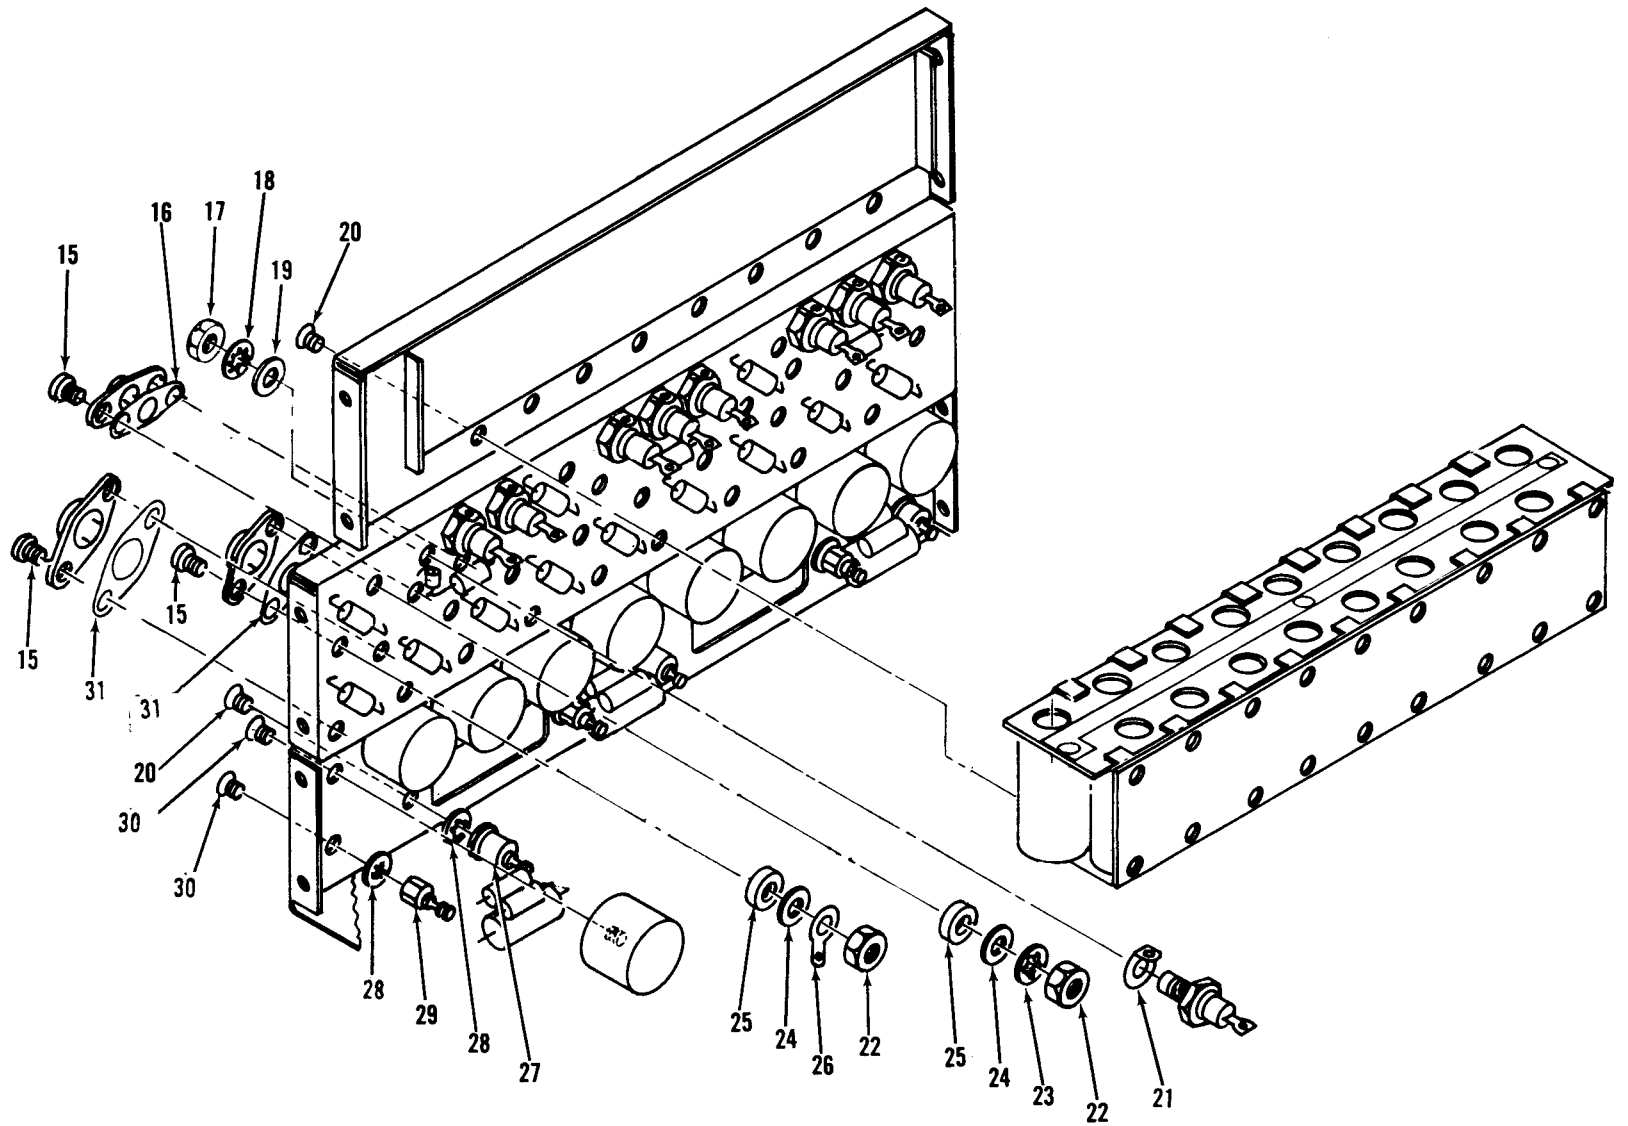


Figure 2. Pulsar Assembly A1 (Sheet 2 of 2)


SECTION II						TM11-6125-258-34P		
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION								
(a)	(b)	NATIONAL			DESCRIPTION		QTY.	
FIG.	ITEM	STOCK	PART				INC.	
NO.	NO.	NUMBER	NUMBER	FSCM		USABLE ON CODE	IN	
							UNIT	
2	1	PAHZZ	600D126F075KD4	56289	CAP FIXED ELECT		EA	6
2	2	XDHZZ	61404-1133	10109	CAP FIXED PLASTIC		EA	3
2	3	PAHZZ	1N3900R	03508	SEMICON DEV DIODE		EA	9
2	4	XDHZZ	4072090-01	10109	INDUCTOR PWR PLSR		EA	9
2	5	PAHZZ	2N4906	04713	TRANSISTOR		EA	3
2	6	PAHZZ	63301-96302	10109	TRANSISTOR		EA	9
2	7	PAHZZ	2N4900	07263	TRANSISTOR		EA	3
2	8	XDHZZ	5905-00-111-4845	RCR07G201JS	81349	RESISTOR FIXED COMP	EA	3
2	9	XDHZZ	5905-00-228-6088	RCR32G331JS	81349	RESISTOR FIXED COMP	EA	3
2	10	PAHZZ	4069018-PO	10109	IMPEDANCE ELEMENT		EA	3
2	11	PAHZZ	4069018-KL	10109	IMPEDANCE ELEMENT		EA	9
2	12	XDHZZ	277B1100	10109	CHASSIS RIGHT		EA	1
2	13	XDHHD	277B1200	10109	CAPACITOR ASSY PLSR		EA	1
2	14	XDHZZ	011-2012-49-9	98291	TERM INSUL FDTHRU		EA	3
2	15	PAHZZ	5305-00-054-6654	MS51957-30	96906	SCREW MACHINE	EA	30
2	16	PAHZZ	5970-00-023-6246	TA2402A	21921	INSULATOR PLATE	EA	3
2	17	PAHZZ	5310-00-400-5503	MS35650-3254	96906	NUT PLAIN HEX	EA	9
2	18	PAHZZ		MS35333-74	96906	WASHER LOCK	EA	9
2	19	PAHZZ	5310-00-764-9564	NAS620C416L	80205	WASHER FLAT	EA	9
2	20	PAHZZ	5305-00-777-6039	MS51959-12	96906	SCREW MACHINE	EA	19
2	21	XDHZZ	5940-00-849-8394	520-196	79963	TERMINAL LUG	EA	9
2	22	PAHZZ	5310-00-616-8660	NAS671C6	80205	NUT PLAIN HEX	EA	30
2	23	PAHZZ	5310-00-616-3555	MS35333-71	96906	WASHER, LOCK	EA	30
2	24	PAHZZ	5310-00-880-5976	MS15795-806	96906	WASHER, FLAT	EA	30
2	25	PAHZZ		722200-018	10109	INSULATOR BUSHING	EA	30
2	26	XDHZZ	5940-00-156-7344	1961	73734	TERMINAL LUG LOCK	EA	15
2	27	XDHZZ		572-4814-1-0516	71279	TERMINAL INSULATED	EA	3
2	28	PAHZZ	5310-00-550-3715	MS35333-70	96906	WASHER LOCK	EA	6
2	29	XDHZZ		170-2345-3-05	71279	TERMINAL GROUNDING	EA	3
2	30	PAHZZ	5305-00-770-2533	MS51959-13	96906	SCREW MACHINE	EA	12
2	31	PAHZZ	5970-00-756-4801	DM123	08289	INSULATOR PLATE	EA	12

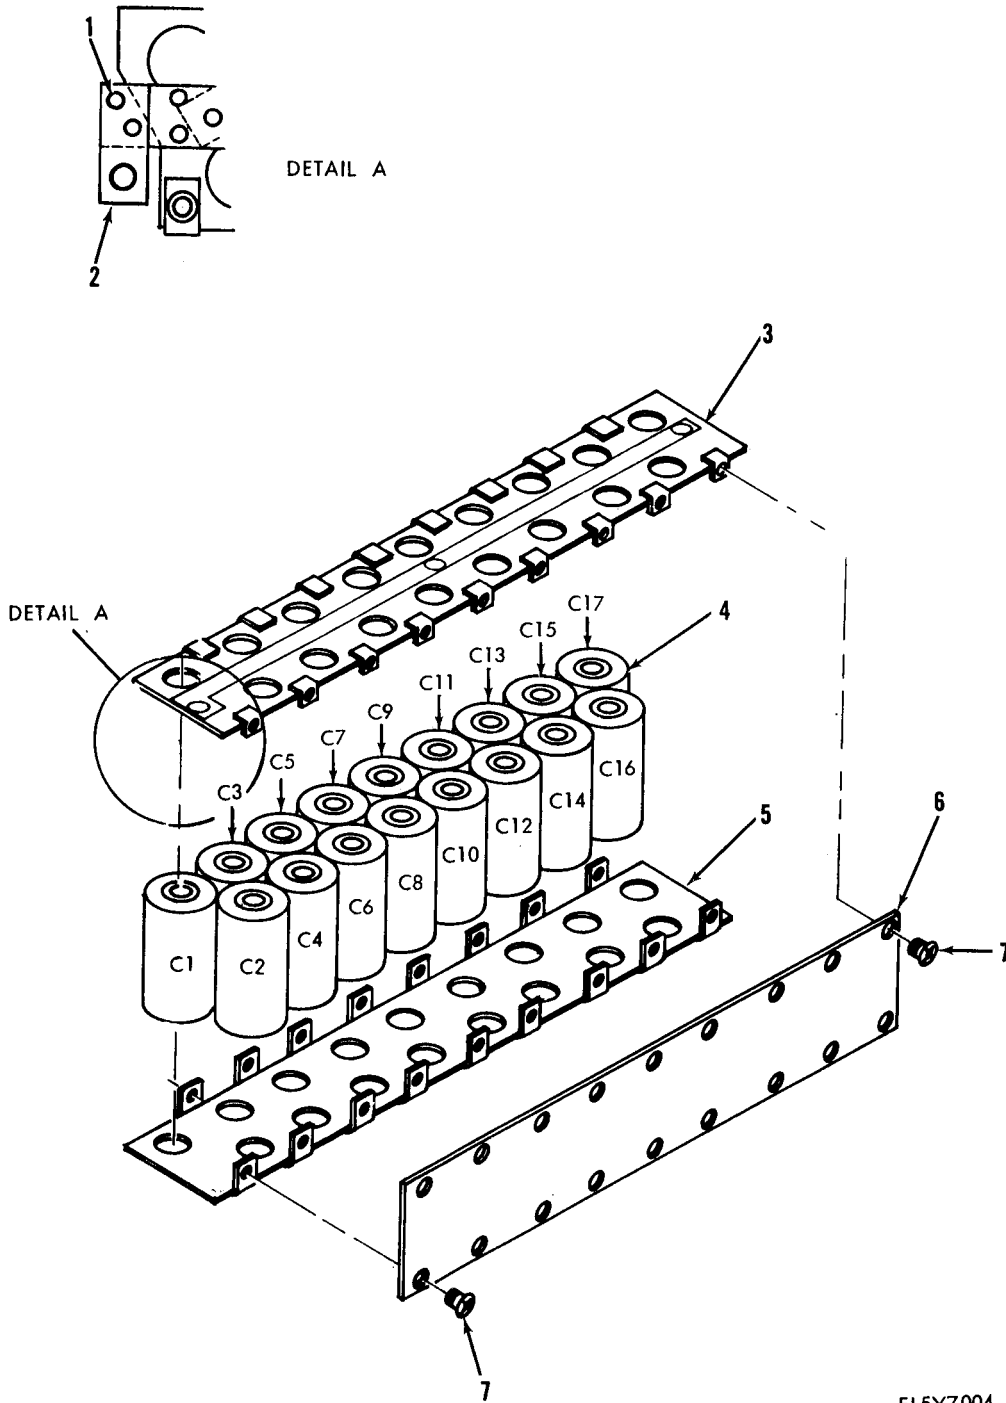

EL5YZ004

Figure 3. Capacitor Assembly A12


SECTION II				TM11-6125-258-34P			
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
ILLUSTRATION				DESCRIPTION			
(a)	(b)	NATIONAL	PART				QTY.
FIG.	ITEM	STOCK	NUMBER	FSCM	USABLE ON CODE	U/M	INC.
NO.	NO.	NUMBER					IN
							UNIT
3	1	XDHZZ	MS20615-3C03	96906		EA	2
3	2	XDHZZ	277D1223	10109	TERMINAL LUG	EA	1
3	3	XDHZZ	277C1210	10109	INS ASSY LOWER	EA	1
3	4	PAHZZ	UHA10029	07793	CAP FIXED ELECT	EA	17
3	5	XDHZZ	277C1220	10109	INS ASSY UPPER	EA	1
3	6	XDHZZ	277C1230	10109	RETAINER CAPACITOR	EA	1
3	7	PAHZZ	5305-00-054-5646 MS51957-12	96906	SCREW MACHINE	EA	18

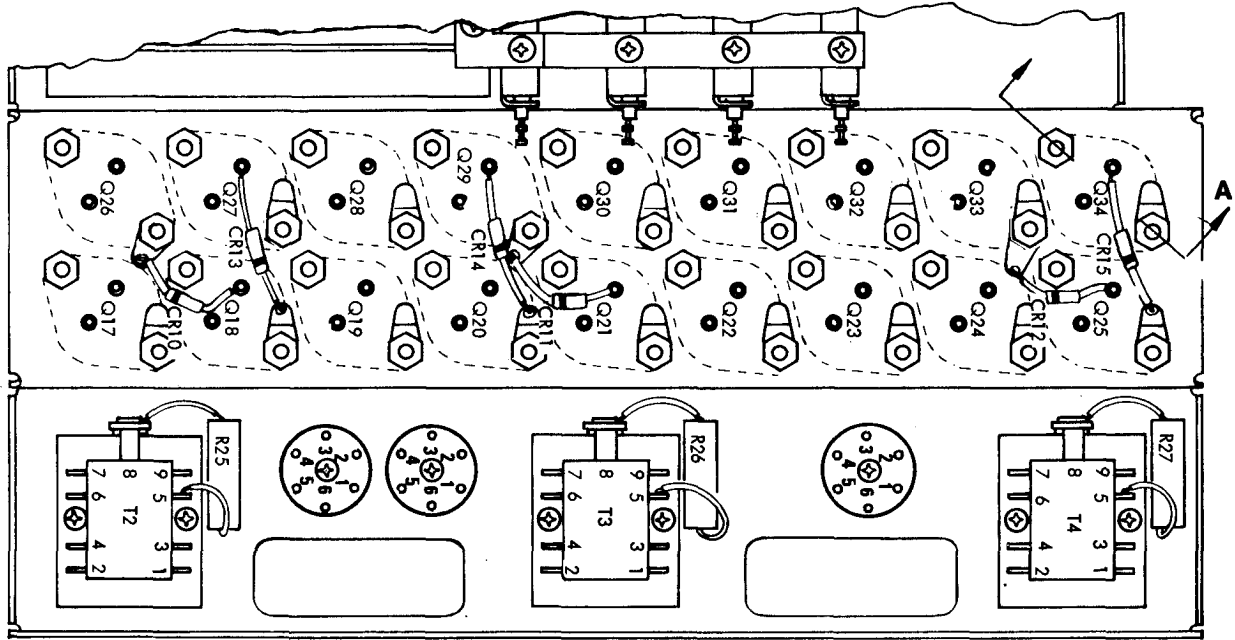

NOTE: TRANSFORMER SECTION REMOVED FOR CLARITY. SEE SHEET 2 FOR COMPLETE ASSEMBLY DETAILS.

LEGEND

REF DES	ITEM NO	REF DES	ITEM NO
CR10	1	Q26	2
CR11	1	Q27	2
CR12	1	Q28	2
CR13	1	Q29	2
CR14	1	Q30	2
CR15	1	Q31	2
Q17	2	Q32	2
Q18	2	Q33	2
Q19	2	Q34	2
Q20	2	R25	3
Q21	2	R26	3
Q22	2	R27	3
Q23	2	T2	4
Q24	2	T3	4
Q25	2	T4	4

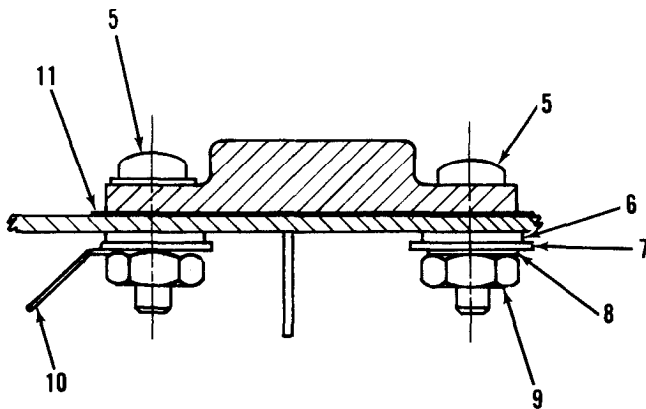


SECTION A-A
12 PLACES

NOTES

1. PREFIX ALL REFERENCE DESIGNATORS WITH A2.
2. ITEM # 12 NOT USED.

EL5YZ005

Figure 4. Inverter Assembly A2 (Sheet 1 of 2)

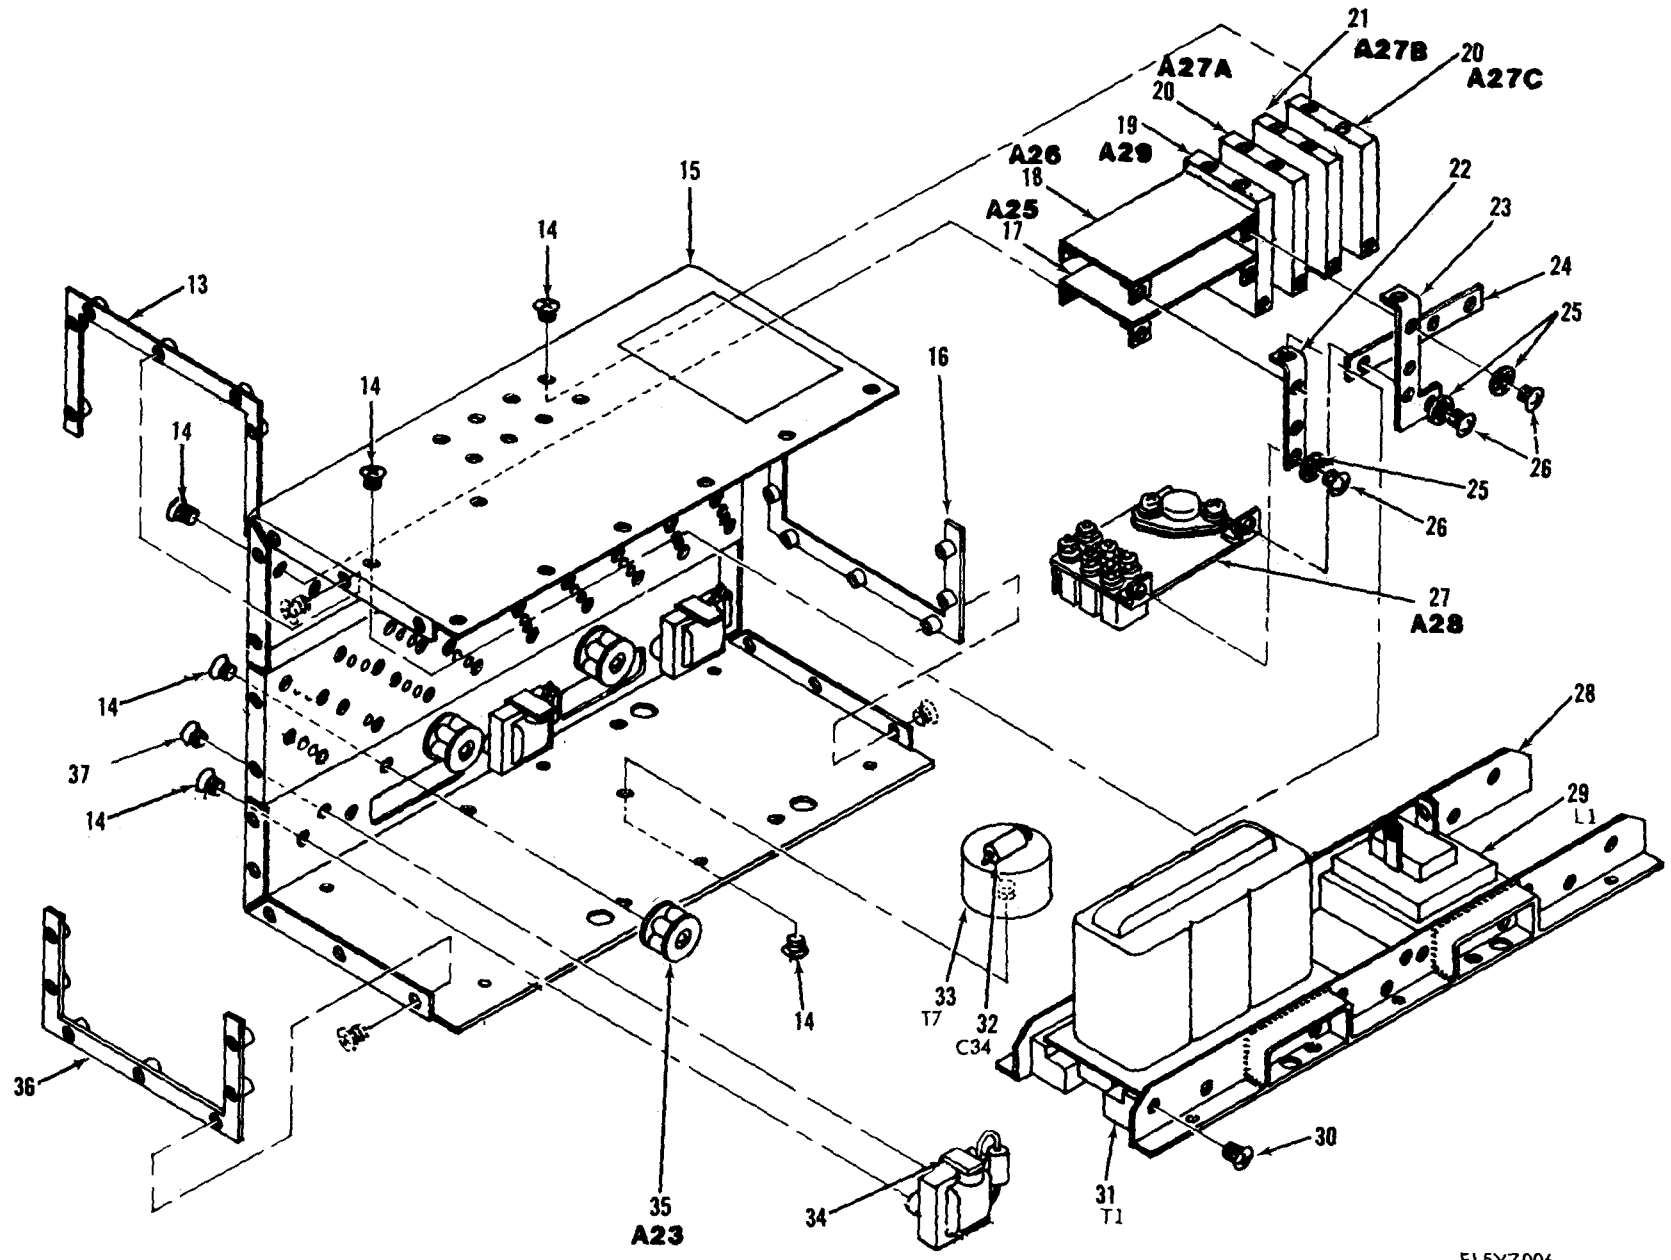

EL5YZ006

Figure 4. Inverter Assembly A2 (Sheet 2 of 2)

SECTION II		TM11-6125-258-34P					(7)	(8)
(1)	(2)	(3)	(4)	(5)	(6)			
ILLUSTRATION							QTY.	
(a)	(b)	NATIONAL	PART		DESCRIPTION		INC.	
FIG. NO.	ITEM NO.	STOCK NUMBER	NUMBER	FSCM		USABLE ON CODE	IN	
							UNIT	
4	1	PAHZZ	JANIN5550	81350	SEMICON DEV DIODE		EA 6	
4	2	PAHZZ	2N5302	07263	TRANSISTOR		EA 18	
4	3	XDHZZ	5905-00-993-7514	RW67VR15	81349	RESISTOR FIXED W/W	EA 3	
4	4	XDHZZ		4071005-01	10109	TRANSFORMER PULSE	EA 3	
4	5	PAHZZ	5305-00-054-6654	MS51957-30	96906	SCREW,MACHINE	EA 36	
4	6	PAHZZ		722200-018	10109	INSULATOR BUSHING	EA 36	
4	7	PAHZZ	5310-00-880-5976	MS15795-806	96906	WASHER,FLAT	EA 36	
4	8	PAHZZ	5310-00-616-3555	MS35333-71	96906	WASHER LOCK	EA 37	
4	9	PAHZZ	5310-00-934-9761	MS35649-264	96906	NUT PLAIN HEX	EA 37	
4	10	XDHZZ	5940-00-156-7344	1961	73734	TERMINAL LUG	EA 10	
4	11	PAHZZ	5970-00-756-4801	DM123	08289	INSULATOR PLATE	EA 18	
4	13	XDHZZ		277A1003	10109	RETAINER FLOATING	EA 1	
4	14	PAHZZ	5305-00-770-2533	MS51959-13	96906	SCREW,MACHINE	EA 35	
4	15	XDHZZ		27782100	10109	CHASSIS ASSY LEFT	EA 1	
4	16	XDHZZ		277A1001	10109	RETAINER FLOATING	EA 1	
4	17	PAHHD		27782500	10109	CIRCUIT CARD ASSY	EA 1	
4	18	PAHHD		277B2600	10109	CIRCUIT CARD ASSY	EA 1	
4	19	XDHHH		277B2900	10109	CAPACITOR ASSY	EA 1	
4	20	XDHHH		277B2701	10109	CAPACITOR ASSY	EA 2	
4	21	XDHHH		277B2701-4	10109	CAPACITOR ASSY	EA 1	
4	22	XDHZZ		277B2703	10109	RETAINER BRKT FRONT	EA 1	
4	23	XDHZZ		277B2704	10109	RETAINER BRKT REAR	EA 1	
4	24	XDHZZ		277B2702	10109	RETAINER CAP ASSY	EA 1	
4	25	PAHZZ	5310-00-550-3715	MS35333-70	96906	WASHER LOCK	EA 10	
4	26	XDHZZ	5305-00-054-5647	6MS51957-13	89690	SCREW MACHINE	EA 10	
4	27	XDHHH		277B2800	10109	REGULATOR ASSY	EA 1	
4	28	XDHZZ		277B2001	10109	FRAME ASSY BASE	EA 2	
4	29	XDHZZ		4071033-00	10109	INDUCTOR POWER FLTR	EA 1	
4	30	PAHZZ	5305-00-763-6963	MS51959-28	96906	SCREW MACHINE	EA 18	
4	31	XDHZZ		4071034-01	10109	XFMR POWER STEPUP	EA 1	
4	32	XDHZZ		61404-3121	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.47UF,150VAC	EA 1	
4	32	XDHZZ		61404-3113	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.10UF,150VAC	EA 1	
4	32	XDHZZ		61404-3115	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.15UF,150CAC	EA 1	
4	32	XDHZZ		61404-3117	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.22UF,150VAC	EA 1	
4	32	XDHZZ		61404-3118	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.27UF,150VAC	EA 1	
4	32	XDHZZ		61404-3119	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.33UF,150VAC	EA	
4	32	XDHZZ		61404-3120	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.39UF,150VAC	EA 1	
4	32	XDHZZ		61404-3122	10109	CAP FIXED PLASTIC SELECT AT TEST 0.56UF 150VAC	EA 1	
4	32	XDHZZ		61404-3123	10109	CAP FIXED PLASTIC SELECT AT TEST, 0.68UF,150VAC	EA 1	
4	33	XDHZZ		4071057-01	10109	TRANSFORMER CURRENT	EA 1	

SECTION II		TM11-6125-258-34P							
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)		
ILLUSTRATION		DESCRIPTION							
(a)	(b)	NATIONAL	PART	FSCM	USABLE ON CODE	U/M	QTY.		
FIG.	ITEM	STOCK	NUMBER				INC.		
NO.	NO.	NUMBER					IN		
							UNIT		
4	34	XDHZZ		277B2200	10109		TERMINAL STRIP GRND	EA	3
4	35	AHHHH		277B2300	10109		RESISTOR ASSY	EA	3
4	36	XDHZZ		277A1002	10109		RETAINER FLOATING	EA	1
4	37	PAHZZ	5305-00-777-6039	MS51959-12	96906		SCREW, MACHINE	EA	6



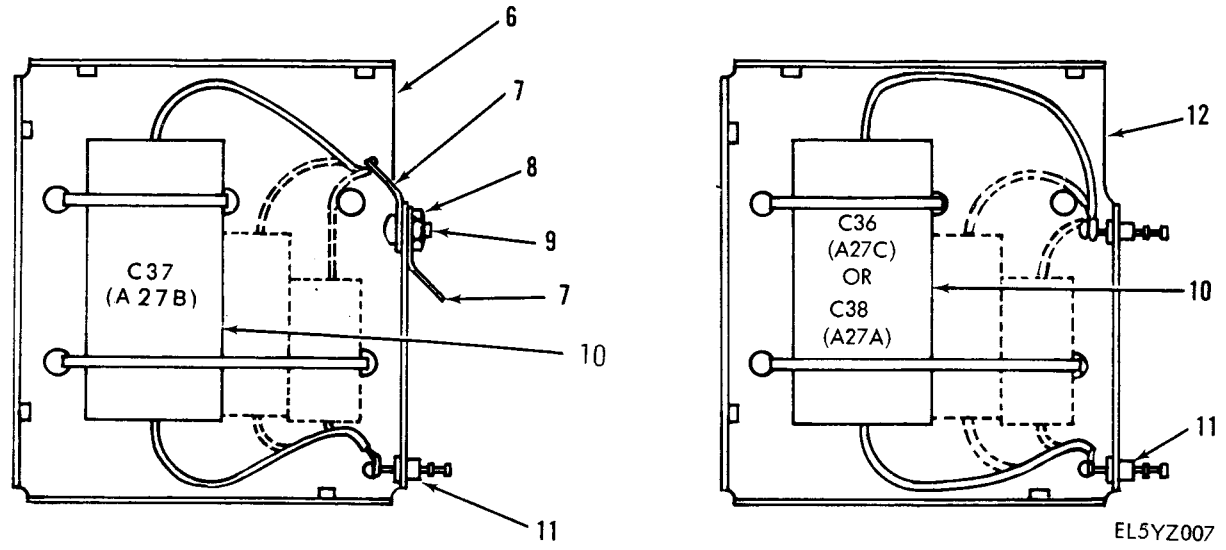


Figure 5. Resistor Assembly A23, Capacitor Assembly A27B, and Capacitor Assembly A27A or A27C

SECTION II				TM11-6125-258-34P				
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION				DESCRIPTION				
(a)	(b)	NATIONAL	PART				QTY.	
FIG.	ITEM	STOCK	NUMBER	FSCM	USABLE ON CODE	U/M	INC.	
NO.	NO.	NUMBER	NUMBER				IN	
							UNIT	
5	1	XDHZZ	SP440H8C	07757	SPACER HEX	EA	1	
5	2	PAHZZ	MS51957-13	96906	SCREW MACHINE	EA	1	
5	3	XDHZZ	277C2301	10109	DISC MOUNTING RESIS	EA	2	
5	4	PAHZZ	5905-00-954-3506	RW69VR39	81349	RESISTOR FIXED W/W	EA	6
5	5	XDHZZ		HMF440C6C	07757	STANDOFF HEX M/F	EA	1
5	6	XDHZZ		9277C2701-4	10109	MNTG BRKT ASSY	EA	1
5	7	XDHZZ	5940-00-682-2477	1960	73734	TERMINAL, LUG	EA	2
5	8	XDHZZ	5310-00-934-9748	MS35649-244	96906	NUT, PLAIN, HEXAGON	EA	1
5	9	XDHZZ	5305-00-054-5649	MS51957-15	96906	SCREW, MACHINE	EA	1
5	10	XDHZZ		61404-3133	10109	CAP FXD PLASTIC SELECT AT TEST, 10.0UF, 150VAC	EA	1
5	10	XDHZZ		61404-3121	10109	CAP FIXED PLASTIC SELECT AT TEST 0.47UF 150VAC	EA	1
5	10	XDHZZ		61404-3125	10109	CAP FIXED PLASTIC SELECT AT TEST 1.0UF 150VAC	EA	1
5	10	XDHZZ		61404-3126	10109	CAP FIXED PLASTIC SELECT AT TEST 1.5UF 150VAC	EA	1
5	10	XDHZZ		61404-3127	10109	CAP FIXED PLASTIC SELECT AT TEST 2.0UF 150VAC	EA	1
5	10	XDHZZ		61404-3127	10109	CAP FIXED CERAMIC SELECT AT TEST 4.0UF 150VAC	EA	1
5	11	XDHZZ		012-2001-499	98291	TERMINAL	EA	1
5	12	XDHZZ		9277C2701	10109	MNTG BRKT ASSY	EA	1

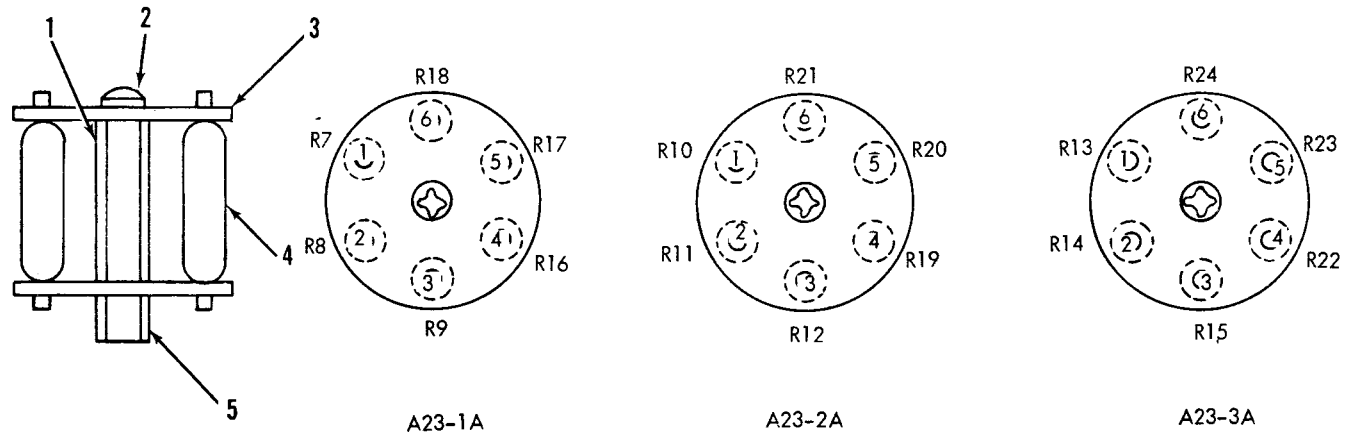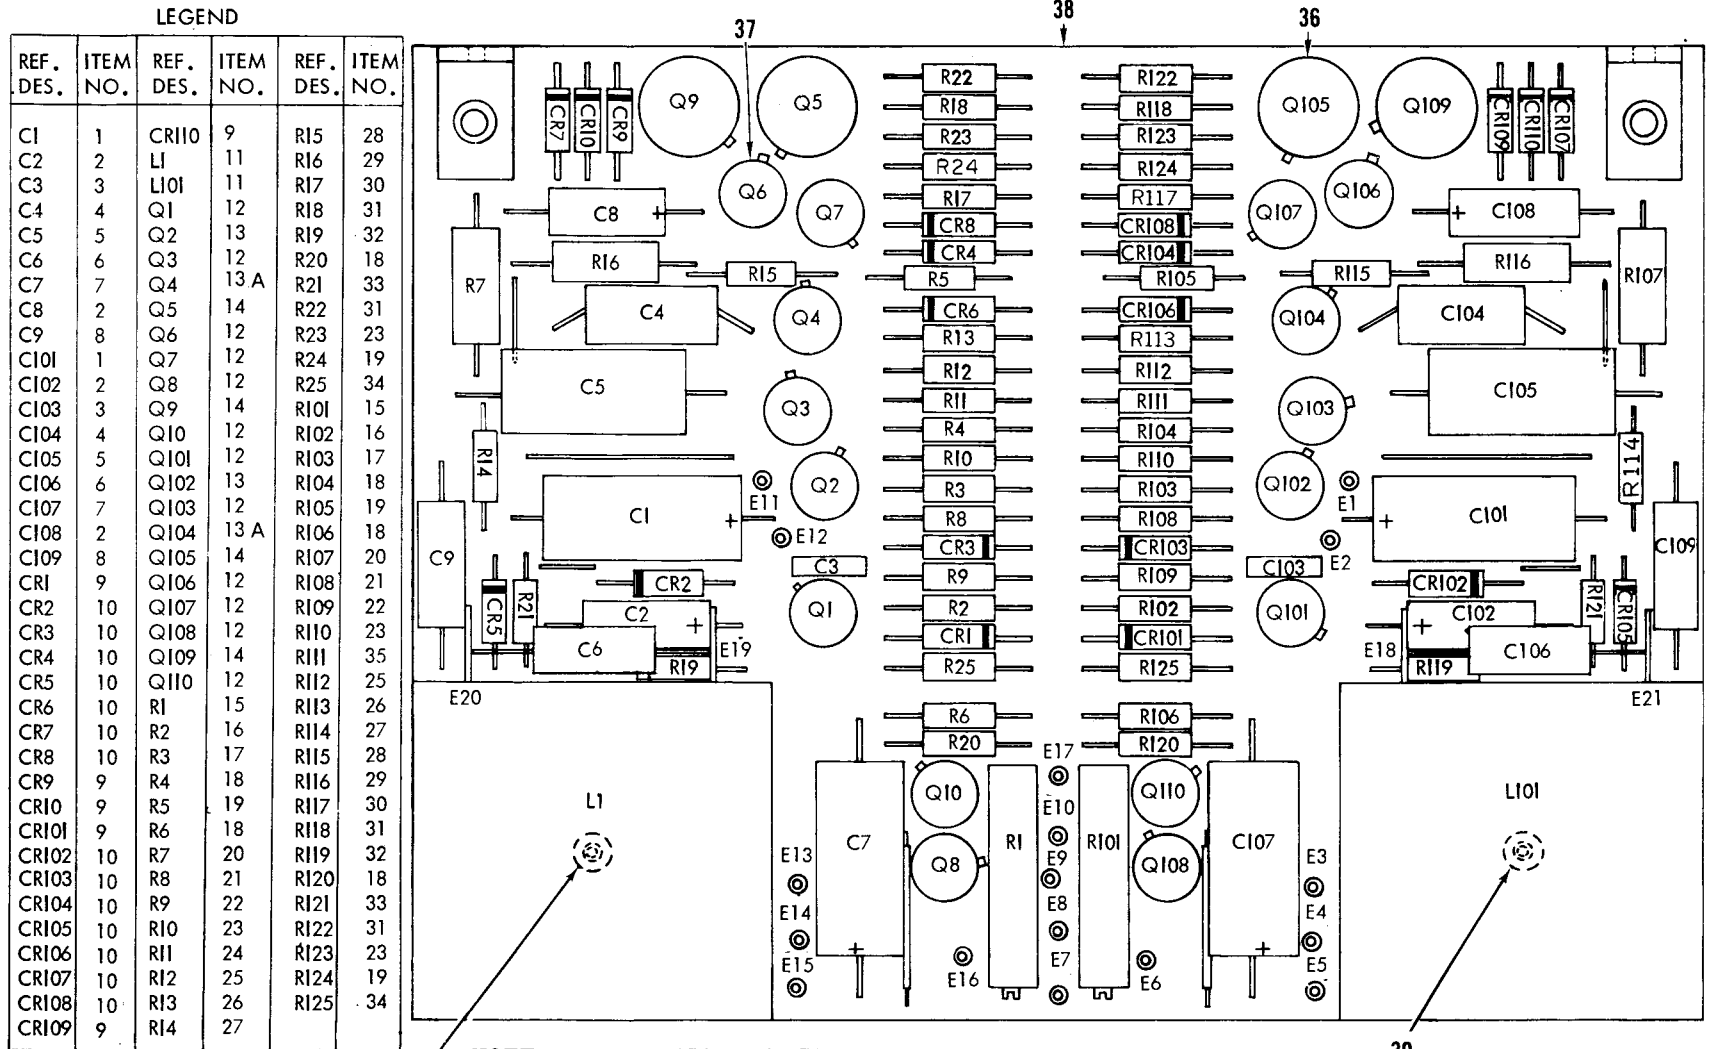

NOTE: PREFIX ALL REFERENCE DESIGNATIONS WITH A25

EL5YZ008


Figure 6. Printed Circuit Assembly A25

SECTION II				TM11-6125-258-34P				
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION							QTY.	
(a)	(b)	NATIONAL	PART		DESCRIPTION		INC.	
FIG. NO.	ITEM NO.	STOCK NUMBER	NUMBER	FSCM		USABLE ON CODE	IN	
							UNIT	
							U/M	
6	1	XDHZZ	M39006-09-6360	81349	CAP FIXED ELECT		EA	2
6	2	PAHZZ	5910-00-138-5393	81349	CAP FIXED ELECT		EA	4
6	3	XDHZZ	5910-01-028-7835	81349	CAP FXD CERAMIC DIE		EA	2
6	4	XDHZZ	61404-2111	10109	CAP FIXED PLASTIC		EA	2
6	5	XDHZZ	61404-1222	10109	CAP FIXED PLASTIC		EA	2
6	6	XDHZZ	61404-2101	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.010UF,75VAC	EA	2
6	6	XDHZZ	61404-2103	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.015UF,75VAC	EA	2
6	6	XDHZZ	61404-2105	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.22UF,75VAC	EA	2
6	6	XDHZZ	61404-2106	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.027UF,75VAC	EA	2
6	6	XDHZZ	61404-2107	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.033UF,75VAC	EA	2
6	6	XDHZZ	61404-2108	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.039UF,75VAC	EA	2
6	6	XDHZZ	61404-2109	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.047UF,75VAC	EA	2
6	6	XDHZZ	61404-2111	10109	CAP FXD PLASTIC	SELECT AT TEST, 0.068UF,75VAC	EA	2
6	6	XDHZZ	61404-2112	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.082UF,75VAC	EA	2
6	6	XDHZZ	61404-2113	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.10UF,75VAC	EA	2
6	7	XDHZZ	5910-00-113-5689	81349	CAP FIXED ELECT		EA	2
6	8	XDHZZ	61404-2105	10109	CAP FXD PLASTIC		EA	2
6	9	PAHZZ	JAN1N645	81349	SEMICON DEV DIODE		EA	6
6	10	PAHZZ	5961-00-085-0326	1N444B	03508	SEMICON DEV DIODE	EA	14
6	11	XDHZZ	4070175-00	10109	INDUCTOR POWER DSC		EA	2
6	12	PAHZZ	5961-00-226-8584	JAN2N2222	81349	TRANSISTOR	EA	12
6	13	PAHZZ	5961-00-949-6560	JAN2N720A	81349	TRANSISTOR	EA	2
6	13A	PAHZZ	5961-00-925-3777	JAN2N2907A	81349	TRANSISTOR	EA	2
6	14	PAHZZ	2N4239	04713	TRANSISTOR		EA	4
6	15	XDHZZ	3009P-1-501	80294	RESISTOR VAR		EA	2
6	16	XDHZZ	5905-00-003-7717	RNC55H6040FS	81349	RESISTOR FIXED FILM	EA	2
6	17	XDHZZ	5905-00-153-0135	RNC55H1212FS	81349	RESISTOR FIXED FILM	EA	2
6	18	PAHZZ	5905-00-480-5196	RNC55H1501FS	81349	RESISTOR FIXED FILM	EA	6
6	19	PAHZZ	5905-00-110-0388	RCR07G104JS	81349	RESISTOR FIXED COMP	EA	4
6	20	XDHZZ	5905-00-997-8076	EB20G5	01121	RESISTOR FIXED COMP	EA	2
6	21	XDHZZ	5905-00-240-7954	RLR07C153GR	81349	RESISTOR FIXED FILM	EA	2
6	22	XDHZZ	5905-00-106-1356	RCR07G152JS	81349	RESISTOR FIXED COMP	EA	2
6	23	PAHZZ	5905-00-114-0711	RCR07G472JS	81349	RESISTOR FIXED COMP	EA	4
6	24	XDHZZ	5905-00-119-3505	RCR07G683JS	81349	RESISTOR FIXED COMP	EA	2
6	25	XDHZZ	5905-00-468-3019	RNC55H2671FS	81349	RESISTOR FIXED FILM	EA	2
6	26	XDHZZ	RLR07C332GR	81349	RESISTOR FIXED FILM		EA	2
6	27	XDHZZ	5905-00-437-6299	RLR07C201GR	81349	RESISTOR FIXED FILM	EA	2
6	28	XDHZZ	5905-00-131-1255	RCR07G122JS	81349	RESISTOR FIXED COMP	EA	2

SECTION II		TM11-6125-258-34P						
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION							QTY.	
(a)	(b)	NATIONAL	PART		DESCRIPTION		INC.	
FIG. NO.	ITEM NO.	SMR CODE	STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	IN	
							UNIT	
							U/M	
6	29	XDHZZ	5905-00-106-1280	RCR20G6R8JS	81349	RESISTOR FIXED COMP	EA	2
6	30	XDHZZ	5905-00-119-8812	RCR07G121JS	81349	RESISTOR FIXED COMP	EA	2
6	31	PAHZZ	5905-00-114-0710	RCR07G331JS	81349	RESISTOR FIXED COMP	EA	4
6	32	XDHZZ	5905-00-758-2917	RLR07C511GR	81349	RESISTOR FIXED FILM	EA	2
6	33	XDHZZ	5905-00-438-0506	RLR07C512GR	81349	RESISTOR FIXED FILM	EA	2
6	34	XDHZZ	5905-00-111-4727	RCR07G272JS	81349	RESISTOR FIXED COMP	EA	2
6	35	XDHZZ	5905-00-106-1357	RCR07G563JS	81349	RESISTOR, FIXED, COMP SELECT AT TEST	EA	1
6	35	XDHZZ	5905-00-136-3890	RCR07G513JS	81349	RESISTOR, FIXED, COMP SELECT AT TEST	EA	1
6	35	XDHZZ	5905-00-141-0717	RCR07G473JS	81349	RESISTOR FIXED COMP SELECT AT TEST	EA	1
6	36	XDHZZ		10240-N	07047	PAD MNING TRANSISTO	EA	4
6	37	XDHZZ		7717-7 DAP	13103	PAD MNING TRANSISTO	EA	16
6	38	XAHZZ		327B1100	10109	PRINTED WIRING BD	EA	1
6	39	PAHZZ	5305-00-054-5646	MS51957-12	96906	SCREW MACHINE	EA	2

LEGEND

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C101	1	Q115	19
C102	2	R101	21
C103	3	R102	22
C104	4	R103	21
C105	2	R104	23
C106	5	R105	24
C107	6	R106	24
C108	7	R107	25
C109	8	R108	26
C110	9	R109	27
C111	10	R110	26
C112	11	R111	28
C113	1	R112	29
C114	11	R113	30
CRI01	12	R114	24
CRI02	13	R115	31
CRI03	13	R116	32
CRI04	14	R117	33
CRI05	15	R118	32
CRI06	15	R119	29
CRI07	15	R120	34
CRI08	15	R121	35
CRI09	15	R122	36
CRI10	12	R123	37
CRI11	12	R124	38
CRI12	15	R125	39
CRI13	15	R126	40
CRI14	12	R127	41
L101	16	R128	28
Q101	17	R129	42
Q102	18	R130	43
Q103	19	R131	29
Q104	19	R132	29
Q105	20	R133	44
Q106	19	R134	29
Q107	19	R135	23
Q108	19	R136	45
Q109	17	R137	46
Q110	18	R138	47
Q111	18	R139	48
Q112	19	R140	48
Q113	19	R141	48
Q114	19	R142	49

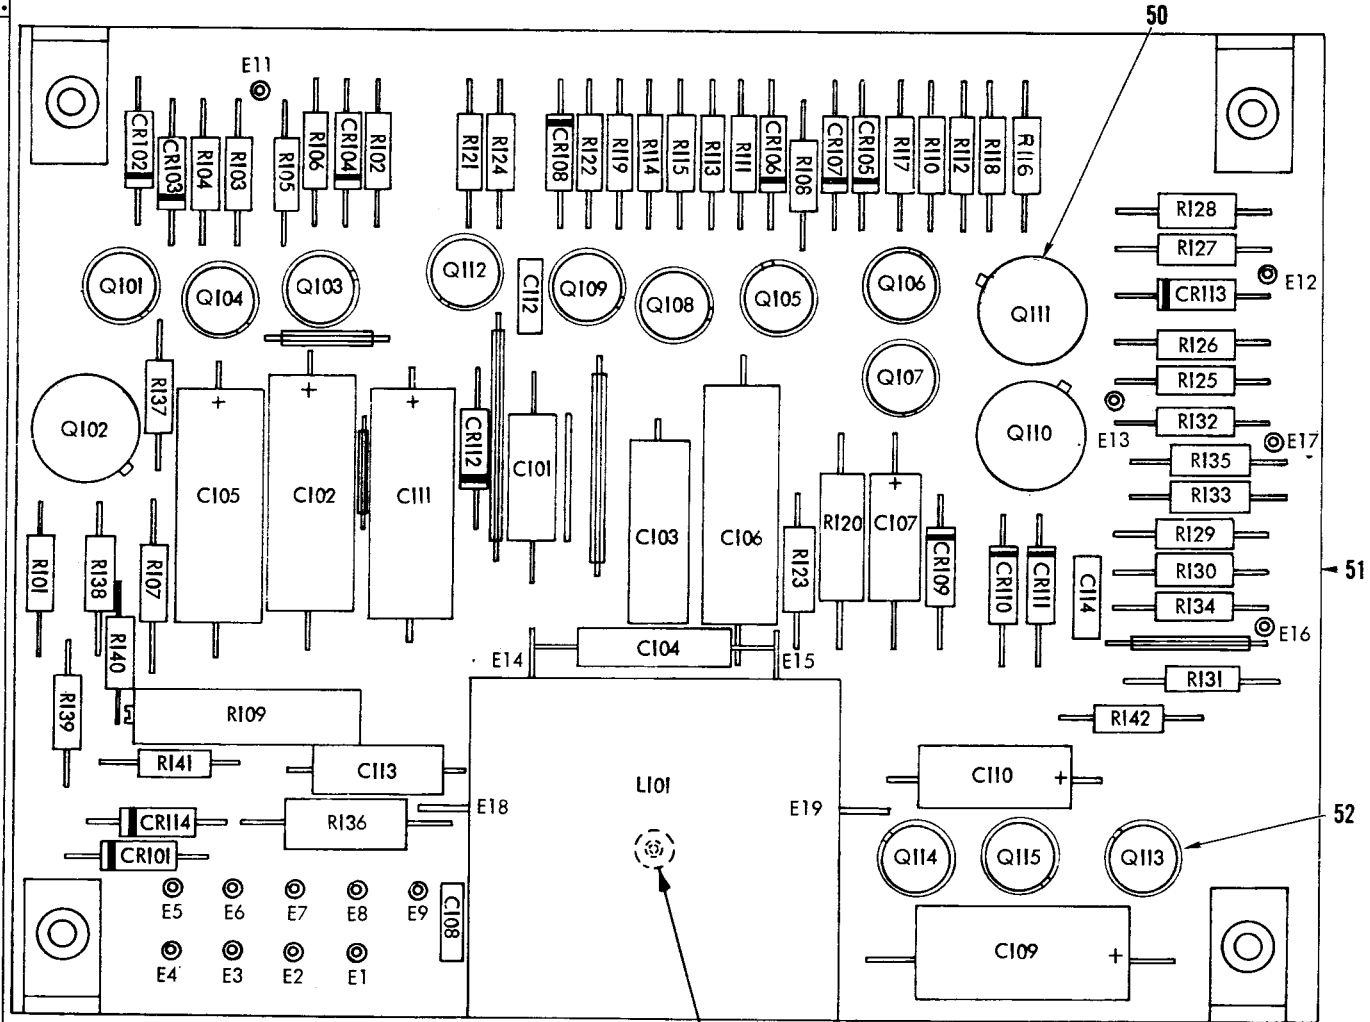


NOTE: PREFIX ALL REFERENCE DESIGNATIONS WITH A26

EL5YZ009


Figure 7. Printed Circuit Assembly A26

SECTION II						TM11-6125-258-34P		
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION							QTY.	
(a)	(b)	NATIONAL	PART		DESCRIPTION		INC.	
FIG. NO.	ITEM NO.	STOCK NUMBER	NUMBER	FSCM		USABLE ON CODE	IN	
							UNIT	
							U/M	
7	1	XDHZZ	M39003-01-2366	81349	CAP FIXED ELECT		EA	2
7	2	XDHZZ	5910-00-113-5689	M39003-01-2296	81349	CAP FIXED ELECT	EA	2
7	3	XDHZZ	61404-2111	10109	CAP FIXED PLASTIC		EA	1
7	4	XDHZZ	61404-2101	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.010UF,75VAC	EA	1
7	4	XDHZZ	61404-2103	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.015UF,75VAC	EA	1
7	4	XDHZZ	61404-2105	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.022UF,75VAC	EA	1
7	4	XDHZZ	61404-2106	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.027UF,75VAC	EA	1
7	4	XDHZZ	61404-2107	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.033UF,75VAC	EA	1
7	4	XDHZZ	61404-2108	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.039UF,75VA	EA	1
7	4	XDHZZ	61404-2109	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.047UF,75VAC	EA	1
7	4	XDHZZ	61404-2111	10109	CAP FXD PLASTIC	SELECT AT TEST, 0.068UF,75VAC	EA	2
7	4	XDHZZ	61404-2112	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.082UF,75VAC	EA	1
7	4	XDHZZ	61404-2113	10109	CAP FIXED PLASTIC	SELECT AT TEST, 0.10UF,75VAC	EA	1
7	5	XDHZZ	61404-1222	10109	CAP FIXED PLASTIC		EA	1
7	6	XDHZZ	5910-00-138-5393	M39003-01-2305	81349	CAP FIXED ELECT	EA	1
7	7	XDHZZ	61404-2105	10109	CAP FXD PLASTIC		EA	1
7	8	XDHZZ	5910-00-147-4754	M39003-01-2275	81349	CAP FIXED ELECT	EA	1
7	9	XDHZZ	5910-00-146-4072	M39003-01-2363	81349	CAP FIXED ELECT	EA	1
7	10	XDHZZ	M39006-09-6360	81349	CAP FIXED ELECT		EA	1
7	11	XDHZZ	5910-01-028-7835	M39014-01-1237	81349	CAP FIXED CERAMIC	EA	2
7	12	PAHZZ	5961-00-087-6047	JAN1N645	81349	SEMICON DEV DIODE	EA	4
7	13	PAHZZ	5961-00-990-3049	JAN1N9358	81349	SEMICON DEV DIODE	EA	2
7	14	PAHZZ	5961-00-852-7549	JAN1N754A	81349	SEMICON DEV DIODE	EA	1
7	15	PAHZZ	5961-00-085-0326	1N4448	01139	SEMICON DEV DIODE	EA	7
7	16	XDHZZ	4070175-01	10109	INDUCTOR PRECISION		EA	1
7	17	PAHZZ	5961-00-949-6560	JAN2N720A	81349	TRANSISTOR	EA	2
7	18	PAHZZ	5961-00-400-5973	2N4239	04713	TRANSISTOR	EA	3
7	19	PAHZZ	5961-00-226-8584	JAN2N2222	81349	TRANSISTOR	EA	9
7	20	XDHZZ	5961-00-925-3777	JAN2N2907A	81349	TRANSISTOR	EA	1
7	21	XDHZZ	5905-00-114-5343	RCR07G182JS	81349	RESISTOR FIXED COMP	EA	2
7	22	XDHZZ	5905-00-477-9176	RNC55H2001FS	81349	RESISTOR FIXED FILM	EA	1
7	23	XDHZZ	5905-00-111-4727	RCR07G272JS	81349	RESISTOR, FIXED, COMP	EA	2
7	24	XDHZZ	5905-00-480-5196	RNC55H1501FS	81349	RESISTOR FIXED FILM	EA	3
7	25	XDHZZ	5905-00-240-7980	RLR07C561GR	81349	RESISTOR FIXED FILM	EA	1
7	26	XDHZZ	5905-00-110-0388	RCR07G104JS	81349	RESISTOR, FIXED, COMP	EA	2
7	27	XDHZZ	3009P-1-202	80294	RESISTOR VARIABLE		EA	1
7	28	XDHZZ	5905-00-438-0505	RLR07C472GR	81349	RESISTOR FIXED FILM	EA	2
7	29	XDHZZ	5905-00-114-0711	RCR07G472JS	81349	RESISTOR, FIXED, COMP	EA	5
7	30	XDHZZ	5905-00-468-3019	RNC55H2671FS	81349	RESISTOR FIXED FILM	EA	1
7	31	XDHZZ	5905-00-119-3505	RCR07G683JS	81349	RESISTOR, FIXED, COMP	EA	1


SECTION II		TM11-6125-258-34P							
(1)	(2)	(3)	(4)	(5)	(6)		(7)	(8)	
ILLUSTRATION								QTY.	
(a)	(b)	NATIONAL			DESCRIPTION			INC.	
FIG. NO.	ITEM NO.	SMR CODE	STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	IN UNIT	
7	32	XDHZZ	5905-00-114-0710	RCR07G331JS	81349	RESISTOR, FIXED, COMP	EA	2	
7	33	XDHZZ	5905-00-119-8812	RCR07G121JS	81349	RESISTOR, FIXED, COMP	EA	1	
7	34	XDHZZ	5905-00-126-6705	RCR20G4R7JS	81349	RESISTOR FIXED COMP	EA	1	
7	35	XDHZZ	5905-00-106-1356	RCR07G152JS	81349	RESISTOR, FIXED, COMP	EA	1	
7	36	XDHZZ	5905-00-153-0135	RNC55H1212FS	81349	RESISTOR FIXED FILM	EA	1	
7	37	XDHZZ	5905-00-119-8768	RCR07G821JS	81349	RESISTOR FIXED COMP	EA	1	
7	38	XDHZZ	5905-00-240-7954	RLR07C153GR	81349	RESISTOR FIXED FILM	EA	1	
7	39	XDHZZ	5905-00-438-0506	RLR07C512GR	81349	RESISTOR FIXED FILM	EA	1	
7	40	XDHZZ	5905-00-437-6299	RLR07C201GR	81349	RESISTOR FIXED FILM	EA	1	
7	41	XDHZZ	5905-00-436-8557	RLR07C124GR	81349	RESISTOR FIXED FILM	EA	1	
7	42	XDHZZ		RLR07C104GR	81349	RESISTOR FIXED FILM	EA	1	
7	43	XDHZZ		RLR07C473GR	81349	RESISTOR FIXED FILM	EA	1	
7	44	XDHZZ	5905-00-135-6046	RCR07G681JS	81349	RESISTOR FIXED COMP	EA	1	
7	45	XDHZZ	5905-00-994-6676	EB10G5	01121	RESISTOR FIXED COMP	EA	1	
7	46	XDHZZ	5905-00-141-1183	RCR07G101JS	81349	RESISTOR FIXED COMP	EA	1	
7	47	XDHZZ	5905-00-104-8368	RCR07G470JS	81349	RESISTOR FIXED COMP	EA	1	
7	48	XDHZZ		RLR07C102GR	81349	RESISTOR FIXED FILM	EA	3	
7	49	XDHZZ	5905-00-111-1678	RCR07G564JS	81349	RESISTOR FIXED COMP SELECT AT TEST	EA	1	
7	49	XDHZZ	5905-00-485-4648	RCR07G244JS	81349	RESISTOR FIXED COMP SELECT AT TEST	EA	1	
7	50	XDHZZ		10240-N	07047	PAD MNTNG TRANSISTO	EA	3	
7	51	XAHZZ		283B1100	10109	PRINTED WIRING BD	EA	1	
7	52	XDHZZ	5970-00-927-3694	7717-7 DAP	13103	PAD MNTNG TRANSISTO	EA	12	
7	53	PAHZZ	5305-00-054-5646	MS51957-12	96906	SCREW, MACHINE	EA	1	

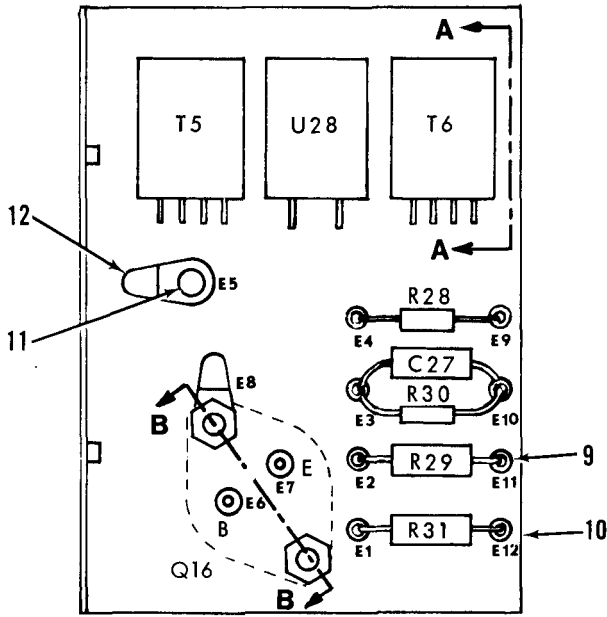


REF DES	ITEM NO.
C27	1
Q16	2
R28	3
R29	4
R30	5
R31	6
T5	7
T6	7
U28	8



SECTION A - A

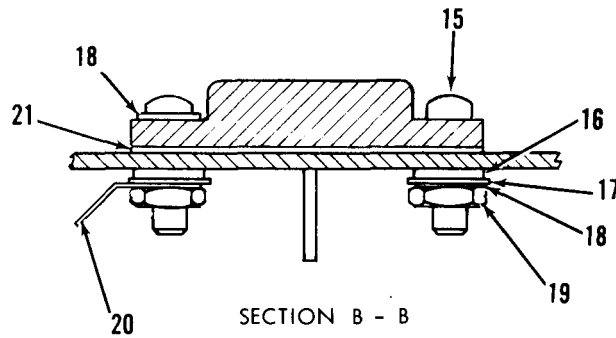

SECTION B - B

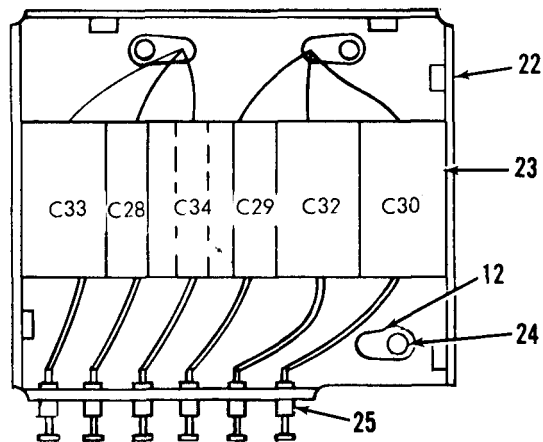

EL5YZ010

Figure 8. Regulator Assembly A28 and Capacitor Assembly A29

SECTION II						TM11-6125-258-34P		
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION								
(a)	(b)	NATIONAL			DESCRIPTION		QTY.	
FIG.	ITEM	STOCK	PART				INC.	
NO.	NO.	NUMBER	NUMBER	FSCM	USABLE ON CODE	U/M	IN	
							UNIT	
8	1	XDHZZ	61404-2115	10109	CAP FIXED PLASTIC	EA	1	
8	2	PAHZZ	2N5302	34148	TRANSISTOR	EA	1	
8	3	XDHZZ	5905-00-114-5489	RCR20G823JS	81349	RESISTOR FIXED COMP	EA	1
8	4	XDHZZ		RW69V472	81349	RESISTOR FIXED WRWO	EA	1
8	5	XDHZZ	5905-00-104-8348	RCR20G332JS	81349	RESISTOR FIXED COMP	EA	1
8	6	XDHZZ		RW69V432	81349	RESISTOR FIXED WRWD	EA	1
8	7	XDHZZ		4071065-00	10109	TRANSFORMER	EA	2
8	8	XDHHH		277C2820	10109	MODULE COMPENSATION	EA	1
8	9	XDHZZ		014-2001-499	98291	TERMINAL INSULATED	EA	8
8	10	XDHHH		277C2810	10109	BRACKET ASSY REGUL	EA	1
8	11	XDHZZ	5320-00-879-6606	MS16535-154	96906	RIVET, TUBULAR	EA	3
8	12	XDHZZ	5940-00-682-2477	1960	73734	TERMINAL, LUG	EA	1
8	13	XDHZZ	5310-00-543-4652	MS35333-69	96906	WASHER LOCK	EA	6
8	14	XDHZZ	5310-00-938-2013	MS35649-224	96906	NUT PLAIN HEX	EA	6
8	15	XDHZZ	5305-00-054-6654	MS51957-30	96906	SCREW, MACHINE	EA	2
8	16	XDHZZ		722200-018	10109	INSULATOR BUSHING	EA	2
8	17	XDHZZ	5310-00-880-5976	MS15795-806	96906	WASHER, FLAT	EA	2
8	18	XDHZZ	5310-00-616-3555	MS35333-71	96906	WASHER, LOCK	EA	2
8	19	XDHZZ	5310-00-934-9761	MS35649-264	96906	NUT PLAIN HEX	EA	2
8	20	XDHZZ	5940-00-156-7344	1961	73734	TERMINAL LUG	EA	1
8	21	XDHZZ	5970-00-756-4801	DM123	08289	INSULATOR PLATE	EA	1
8	22	XDHHH		277C2910	10169	MNTNG BRKT ASSY	EA	1
8	23	PAHZZ		DA2B106	27556	CAP FIXED	EA	6
8	24	XDHZZ	5320-00-721-5239	MS16535-153	96906	RIVET, TUBULAR	EA	3
8	5	XDHZZ		011-2012-499	98291	TERM INSUL SEE-THRU	EA	6

NATIONAL STOCK NUMBER AND PART NUMBER INDEX
 NOTE: LATEST PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-003-7717	6	16	5310-00-400-5503	2	17
5970-00-023-6246	2	16	5961-00-400-5973	7	18
5305-00-054-5646	1	15	5905-00-436-8557	7	41
5305-00-054-5646	3	7	5905-00-437-6299	6	27
5305-00-054-5646	6	39	5905-00-437-6299	7	40
5305-00-054-5646	7	53	5905-00-438-0505	7	28
5305-00-054-5647	1	19	5905-00-438-0506	6	33
5305-00-054-5647	4	26	5905-00-438-0506	7	39
5305-00-054-5649	1	18	5905-00-468-3019	6	25
5305-00-054-5649	5	9	5905-00-468-3019	7	30
5305-00-054-6654	2	15	5905-00-477-9176	7	22
5305-00-054-6654	4	5	5905-00-480-5196	6	18
5305-00-054-6654	8	15	5905-00-480-5196	7	24
5961-00-085-0326	6	10	5905-00-485-4648	7	49
5961-00-085-0326	7	15	5310-00-543-4652	8	13
5961-00-087-6047	7	12	5310-00-550-3715	2	28
5905-00-104-8348	8	5	5310-00-550-3715	4	25
5905-00-104-8368	7	47	5310-00-616-3555	1	6
5905-00-106-1280	6	29	5310-00-616-3555	2	23
5905-00-106-1356	6	22	5310-00-616-3555	4	8
5905-00-106-1356	7	35	5310-00-616-3555	8	18
5905-00-106-1357	6	35	5310-00-616-8660	2	22
5905-00-110-0388	6	19	5940-00-682-2477	5	7
5905-00-110-0388	7	26	5940-00-682-2477	8	12
5905-00-111-1678	7	49	5320-00-721-5239	8	24
5905-00-111-4727	6	34	5970-00-756-4801	2	31
5905-00-111-4727	7	23	5970-00-756-4801	4	11
5905-00-111-4845	2	8	5970-00-756-4801	8	21
5910-00-113-5689	6	7	5905-00-758-2917	6	32
5910-00-113-5689	7	2	5305-00-763-6963	4	30
5905-00-114-0710	6	31	5305-00-763-7822	1	10
5905-00-114-0710	7	32	5310-00-764-9564	2	19
5905-00-114-0711	6	23	5305-00-770-2533	2	30
5905-00-114-0711	7	29	5305-00-770-2533	4	14
5905-00-114-5343	7	21	5305-00-777-6039	1	8
5905-00-114-5489	8	3	5305-00-777-6039	2	20
5905-00-119-3505	6	24	5305-00-777-6039	4	37
5905-00-119-3505	7	31	5940-00-849-8394	2	21
5905-00-119-8768	7	37	5961-00-852-7549	7	14
5905-00-119-8812	6	30	5320-00-879-6606	8	11
5905-00-119-8812	7	33	5310-00-880-5976	1	5
5905-00-126-6705	7	34	5310-00-880-5976	2	24
5905-00-131-1255	6	28	5310-00-880-5976	4	7
5905-00-135-6046	7	44	5310-00-880-5976	8	17
5905-00-136-3890	6	35	5961-00-925-3777	6	13
5910-00-138-5393	6	2	5961-00-925-3777	7	20
5910-00-138-5393	7	6	5970-00-927-3694	7	52
5905-00-141-0717	6	35	5310-00-934-9748	5	8
5905-00-141-1183	7	46	5310-00-934-9761	1	7
5910-00-146-4072	7	9	5310-00-934-9761	4	9
5910-00-147-4754	7	8	5310-00-934-9761	8	19
5905-00-153-0135	6	17	5310-00-938-2013	8	14
5905-00-153-0135	7	36	5961-00-949-6560	6	13
5940-00-156-7344	2	26	5961-00-949-6560	7	17
5940-00-156-7344	4	10	5905-00-954-3506	5	4
5940-00-156-7344	8	20	5961-00-990-3049	7	13
5961-00-226-8584	6	12	5905-00-993-7514	4	3
5961-00-226-8584	7	19	5905-00-994-6676	7	45
5905-00-228-6088	2	9	5905-00-997-8076	6	20
5905-00-240-7954	6	21	5910-01-028-7835	6	20
5905-00-240-7954	7	38	5910-01-028-7835	7	11
5905-00-240-7980	7	25			

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
DA2B106	27556	8	23	JAN2N2222	81349	7	19
DM123	08289	2	31	JAN2N2907A	81349	6	13
DM123	08289	4	11	JAN2N2907A	81349	7	20
DM123	08289	8	21	JAN2N720A	81349	6	13
EB10G5	01121	7	45	JAN2N720A	81349	7	17
EB20G5	01121	6	20	MS15795-806	96906	1	5
HMF440C6C	07757	5	5	MS15795-806	96906	2	24
JANIN5550	81350	4	1	MS15795-806	96906	4	7
JANIN645	81349	6	9	MS15795-806	96906	8	17
JANIN645	81349	7	12	MS16535-153	96906	8	24
JANIN754A	81349	7	14	MS16535-154	96906	8	11
JANIN935B	81349	7	13	MS20615-3CU3	96906	3	1
JAN2N2222	81349	6	12	MS35333-69	96906	8	13

SECTION IV PART NUMBER	NATIONAL STOCK NUMBER AND PART NUMBER INDEX FSCM	FIG. NO.	ITEM NO.	PART NUMBER	TM11-6125-258-34P FSCM	FIG. NO.	ITEM NO.
MS35333-70	96906	2	28	RLR07C201GR	81349	6	27
MS35333-70	96906	4	25	RLR07C201GR	81349	7	40
MS35333-71	96906	1	6	RLR07C332GR	81349	6	26
MS35333-71	96906	2	23	RLR07C472GR	81349	7	28
MS35333-71	96906	4	8	RLR07C473GR	81349	7	43
MS35333-71	96906	8	18	RLR07C511GR	81349	6	32
MS35333-74	96906	2	18	RLR07C512GR	81349	6	33
MS35649-224	96906	8	4	RLR07C512GR	81349	7	39
MS35649-244	96906	5	8	RLR07C561GR	81349	7	25
MS35649-264	96906	1	7	RNC55H1212FS	81349	6	17
MS35649-264	96906	4	9	RNC55H1212FS	81349	7	36
MS35649-264	96906	8	19	RNC55H1501FS	81349	6	18
MS35650-3254	96906	2	17	RNC55H1501FS	81349	7	24
MS51957-12	96906	1	15	RNC55H2001FS	81349	7	22
MS51957-12	96906	3	7	RNC55H2671FS	81349	6	25
MS51957-12	96906	6	39	RNC55H2671FS	81349	7	30
MS51957-12	96906	7	53	RNC55H6040FS	81349	6	16
MS51957-13	96906	1	19	RW67VR15	81349	4	3
MS51957-13	96906	5	2	RW69VR39	81349	5	4
MS51957-15	96906	1	18	RW69V432	81349	8	6
MS51957-15	96906	5	9	RW69V472	81349	8	4
MS51957-30	96906	2	15	SP440H8C	07757	5	1
MS51957-30	96906	4	5	TA2402A	21921	2	16
MS51957-30	96906	8	15	UHA10029	07793	3	4
MS51959-12	96906	1	8	011-2012-49-9	98291	2	14
MS51959-12	96906	2	20	011-2012-499	98291	8	25
MS51959-12	96906	4	37	014-2001-499	98291	8	9
MS51959-13	96906	2	30	IN3900R	03508	2	3
MS51959-13	96906	4	14	1N4448	01139	7	15
MS51959-14	96906	1	10	1N4448	03508	6	10
MS51959-28	96906	4	30	10240-N	07047	6	36
M39003-01-2275	81349	7	8	10240-N	07047	7	50
M39003-01-2296	81349	6	7	170-2345-3-05	71279	2	29
M39003-01-2296	81349	7	2	1960	73734	5	7
M39003-01-2305	81349	9	2	1960	73734	8	12
M39003-01-2305	81349	7	6	1961	73734	2	26
M39003-01-2363	81349	7	9	1961	73734	4	10
M39003-01-2366	81349	7	1	1961	73734	8	20
M39006-09-6360	81349	6	1	2N4239	04713	6	14
M39006-09-6360	81349	7	10	2N4239	04713	7	18
M39014-01-1237	81349	6	3	2N4900	07263	2	7
M39014-01-1237	81349	7	11	2N4906	04713	2	5
NAS620C416L	80205	2	19	2N5302	07263	4	2
NAS671C6	80205	2	22	2N5302	34148	8	2
RCR07G101JS	81349	7	46	277A1000-4	10109	1	2
RCR07G104JS	81349	6	19	277A1001	10109	4	16
RCR07G104JS	81349	7	26	277A1002	10109	4	36
RCR07G121JS	81349	6	30	277A1003	10109	4	13
RCR07G121JS	81349	7	33	277A2000-3	10109	1	12
RCR07G122JS	81349	6	28	277A3000	10109	1	9
RCR07G152JS	81349	6	22	277A4000	10109	1	17
RCR07G152JS	81349	7	35	277A5000-1	10109	1	20
RCR07G182JS	81349	7	21	277A6000	10109	1	1
RCR07G201JS	81349	2	8	277A7000	10109	1	11
RCR07G244JS	81349	7	49	277B1100	10109	2	12
RCR07G272JS	81349	6	34	277B1200	10109	2	13
RCR07G272JS	81349	7	23	277B2001	10109	4	28
RCR07G331JS	81349	6	31	277B2100	10109	4	15
RCR07G331JS	81349	7	32	277B2200	10109	4	34
RCR07G470JS	81349	7	47	277B2300	10109	4	35
RCR07G472JS	81349	6	23	277B2500	10109	4	17
RCR07G472JS	81349	7	29	277B2600	10109	4	18
RCR07G473JS	81349	6	35	277B2701	10109	4	20
RCR07G513JS	81349	6	35	277B2701-4	10109	4	21
RCR07G563JS	81349	6	35	277B2702	10109	4	24
RCR07G564JS	81349	7	49	277B2703	10109	4	22
RCR07G681JS	81349	7	44	277B2704	10109	4	23
RCR07G683JS	81349	6	24	277B2800	10109	4	27
RCR07G683JS	81349	7	31	277B2900	10109	4	19
RCR07G821JS	81349	7	37	277B4400	10109	1	16
RCR20G332JS	81349	8	5	277B4500	10109	1	13
RCR20G4R7JS	81349	7	34	277C1210	10109	3	3
RCR20G6R8JS	81349	6	29	277C1220	10109	3	5
RCR20G823JS	81349	8	3	277C1230	10109	3	6
RCR32G331JS	81349	2	9	277C2301	10109	5	3
RLR07C102GR	81349	7	48	277C2810	10109	8	10
RLR07C104GR	81349	7	42	277C2820	10109	8	8
RLR07C124GR	81349	7	41	277C2910	10169	8	22
RLR07C153GR	81349	6	21	277D1223	10109	3	2
RLR07C153GR	81349	7	38	28210	73734	1	3

SECTION IV PART NUMBER	NATIONAL STOCK NUMBER AND PART NUMBER INDEX			TM11-6125-258-34P			
	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
283B1100	10109	7	51	61404-2109	10109	6	6
3009P-1-202	80294	7	27	61404-2109	10109	7	4
3009P-1-501	80294	6	15	61404-2111	10109	6	4
327B1100	10109	6	38	61404-2111	10109	6	6
4069018-KL	10109	2	11	61404-2111	10109	7	3
4069018-PO	10109	2	10	61404-2111	10109	7	4
4070175-00	10109	6	11	61404-2112	10109	6	6
4070175-01	10109	7	16	61404-2112	10109	7	4
4071005-01	10109	4	4	61404-2113	10109	6	6
4071033-00	10109	4	29	61404-2113	10109	7	4
4071034-01	10109	4	31	61404-2115	10109	8	1
4071057-01	10109	4	33	61404-3113	10109	4	32
4071065-00	10109	8	7	61404-3115	10109	1	14
4072090-01	10109	2	4	61404-3115	10109	4	32
520-196	79963	2	21	61404-3117	10109	4	32
572-4814-1-0516	71279	2	27	61404-3118	10109	4	32
6MS51957-13	89690	4	26	61404-3119	10109	4	32
600D126F075KD4	56289	2	1	61404-3120	10109	4	32
61404-1133	10109	2	2	61404-3121	10109	4	32
61404-1222	10109	6	5	61404-3121	10109	5	10
61404-1222	10109	7	5	61404-3122	10109	4	32
61404-2101	10109	6	6	61404-3123	10109	4	32
61404-2101	10109	7	4	61404-3125	10109	5	10
61404-2103	10109	6	6	61404-3126	10109	5	10
61404-2103	10109	7	4	61404-3127	10109	5	10
61404-2105	10109	6	8	61404-3127	10109	5	10
61404-2105	10109	6	6	61404-3133	10109	5	10
61404-2105	10109	7	4	63301-96302	10109	2	6
61404-2105	10109	7	7	722200-018	10109	2	25
61404-2106	10109	6	6	722200-018	10109	4	6
61404-2106	10109	7	4	722200-018	10109	8	16
61404-2107	10109	6	6	7717-7 DAP	13103	6	37
61404-2107	10109	7	4	7717-7 DAP	13103	7	52
61404-2108	10109	6	6				
61404-2108	10109	7	4	9277C2701-4	10109	5	6

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
012-2001-499	98291	5	11
277A8000	10109	1	4
9277C2701	10109	5	12

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
 Commander
 Stateside Army Depot
 ATTN: AMSTA-US
 Stateside, NJ 07703

DATE SENT
 10 July 1975

PUBLICATION NUMBER
 TM 11-5840-340-20P

PUBLICATION DATE
 23 Jan 78

PUBLICATION TITLE
 Radar Set AN/PRC-76

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above.

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirito 999-1776

SIGN HERE:

SSG I. M. DeSpirito

DA FORM 2028-2
 1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300


POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



SOMETHING WRONG WITH THIS PUBLICATION?

THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6125-258-34P

PUBLICATION DATE

25 Jun 80

PUBLICATION TITLE

Inverter, Static PP-7274B/A

BE EXACT. PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO	

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG PERFORATED LINE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300


POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



SOMETHING WRONG WITH THIS PUBLICATION?

THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6125-258-34P

PUBLICATION DATE

25 Jun 80

PUBLICATION TITLE

Inverter, Static PP-7274B/A

BE EXACT. PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO	

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG PERFORATED LINE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

E. C. MEYER
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON

Major General, United States Army
The Adjutant General

Distribution:

Active Army:

HISA (Ft Monmouth) (21)
USAINSCOM (2)
COE (1)
TSG (1)
USAARENBD (1)
DARCOM (1)
TRADOC (2)
OS Maj Cmd (4)
TECOM (2)
USACC (4)
MDW (1)
Armies (2)
Corps (2)
Svc Colleges (1)
USASIGS (5)
USAADS (2)
USAFAS (2)
USAARMS (2)
USAIS (2)

USAES (2)
USAICS (3)
MAAG (1)
USARMIS (1)
USAERDAA (1)
USAERDAW (1)
Ft Gordon (10)
Ft Carson (5)
Army Dep (1) except
SAAD (30)
TOAD (14)
SHAD (2)
Ft Gillem (10)
USA Dep (1)
Sig Sec USA Dep (1)
Ft Richardson (CERCOM Ofc) (2)
Units org under fol TOE:
29-207 (2)
29-610 (2)

NG: None

USAR: None

For explanation of abbreviations used, see AR 310-50.

