

**TECHNICAL MANUAL**

**GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS  
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)**

**FOR**

**BRIDGE, CAPACITANCE-INDUCTANCE-RESISTANCE ZM-70/U  
(NSN 6625-00-404-1592)**

---

**HEADQUARTERS, DEPARTMENT OF THE ARMY**  
**JUNE 1980**



**GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS  
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)**

FOR

**BRIDGE, CAPACITANCE-INDUCTANCE-RESISTANCE ZM-70/U  
(NSN 6625-00-404-1592)**

*Current as of 14 December 1979*

**REPORTING OF ERRORS**

You can help improve this manual. If you find any mistakes or know of a way to improve the procedures, please let us know. Mail your DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703.

In either case a reply will be furnished direct to you.

**TABLE OF CONTENTS**

	Page	Illus. Figure
SECTION I. Introduction . . . . .	1	
II. Repair parts list . . . . .	5	
GROUP 00 Bridge, Capacitance-Inductance-Resistance ZM-70/U . . . . .	5	1
Bridge, Capacitance-Inductance-Resistance ZM-70/U, Front Panel Back View, Additional Parts . . . . .	7	2
Bridge, Capacitance-Inductance-Resistance ZM-70/U, Back View and Additional Parts . . . . .	9	3
SECTION III. Special Tools List (Not applicable )		
IV. National stock number and part number index . . . . .	10	



## SECTION I

### INTRODUCTION

#### 1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of general support maintenance of the ZM-70/U. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

#### 2. General

This Repair Parts and Special Tools List is divided into the following sections:

*a. Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

*b. Section III. Special Tools List.* Not applicable.

*c. Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NHN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

#### 3. Explanation of Columns

*a. Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

*b. Source, Maintenance, and Recoverability (SMR) Codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage,

<i>Code</i>	<i>Definition</i>
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

#### NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O	Support item is removed, replaced, used at the organizational level.

H	Support item is removed, replaced, used at the general support level.
---	---

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions), This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
H	The lowest maintenance level capable of complete repair of the support item is the general support level,
D	The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability codes</i>	<i>Definition</i>
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.

Recoverability  
codes

Definition

H — Repairable item. When uneconomically repairable, condemn and dispose at the general support level.

L — Repairable item. Repair, condemnation, and disposal not authorized below depot/specialized repair activity level.

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

**NOTE**

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM).* The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description.* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit.* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

#### 4. Special Information

The following publications pertain to the ZM-70/U and its components:

TM 11-6625-2597-12. Bridge. Capacitance-Inductance-Resistance ZM-70/U

TM 11-6625-2597-40, Bridge, Capacitance-Inductance-Resistance ZM-70/U.

#### 5. How to Locate Repair Parts

a. When National stock number or part number is unknown,

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration,

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alpha-merit sequence, cross-referenced to the illustration figure number and item number.


(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

#### 6. Abbreviations

Not applicable.

(Next printed page is 4.)



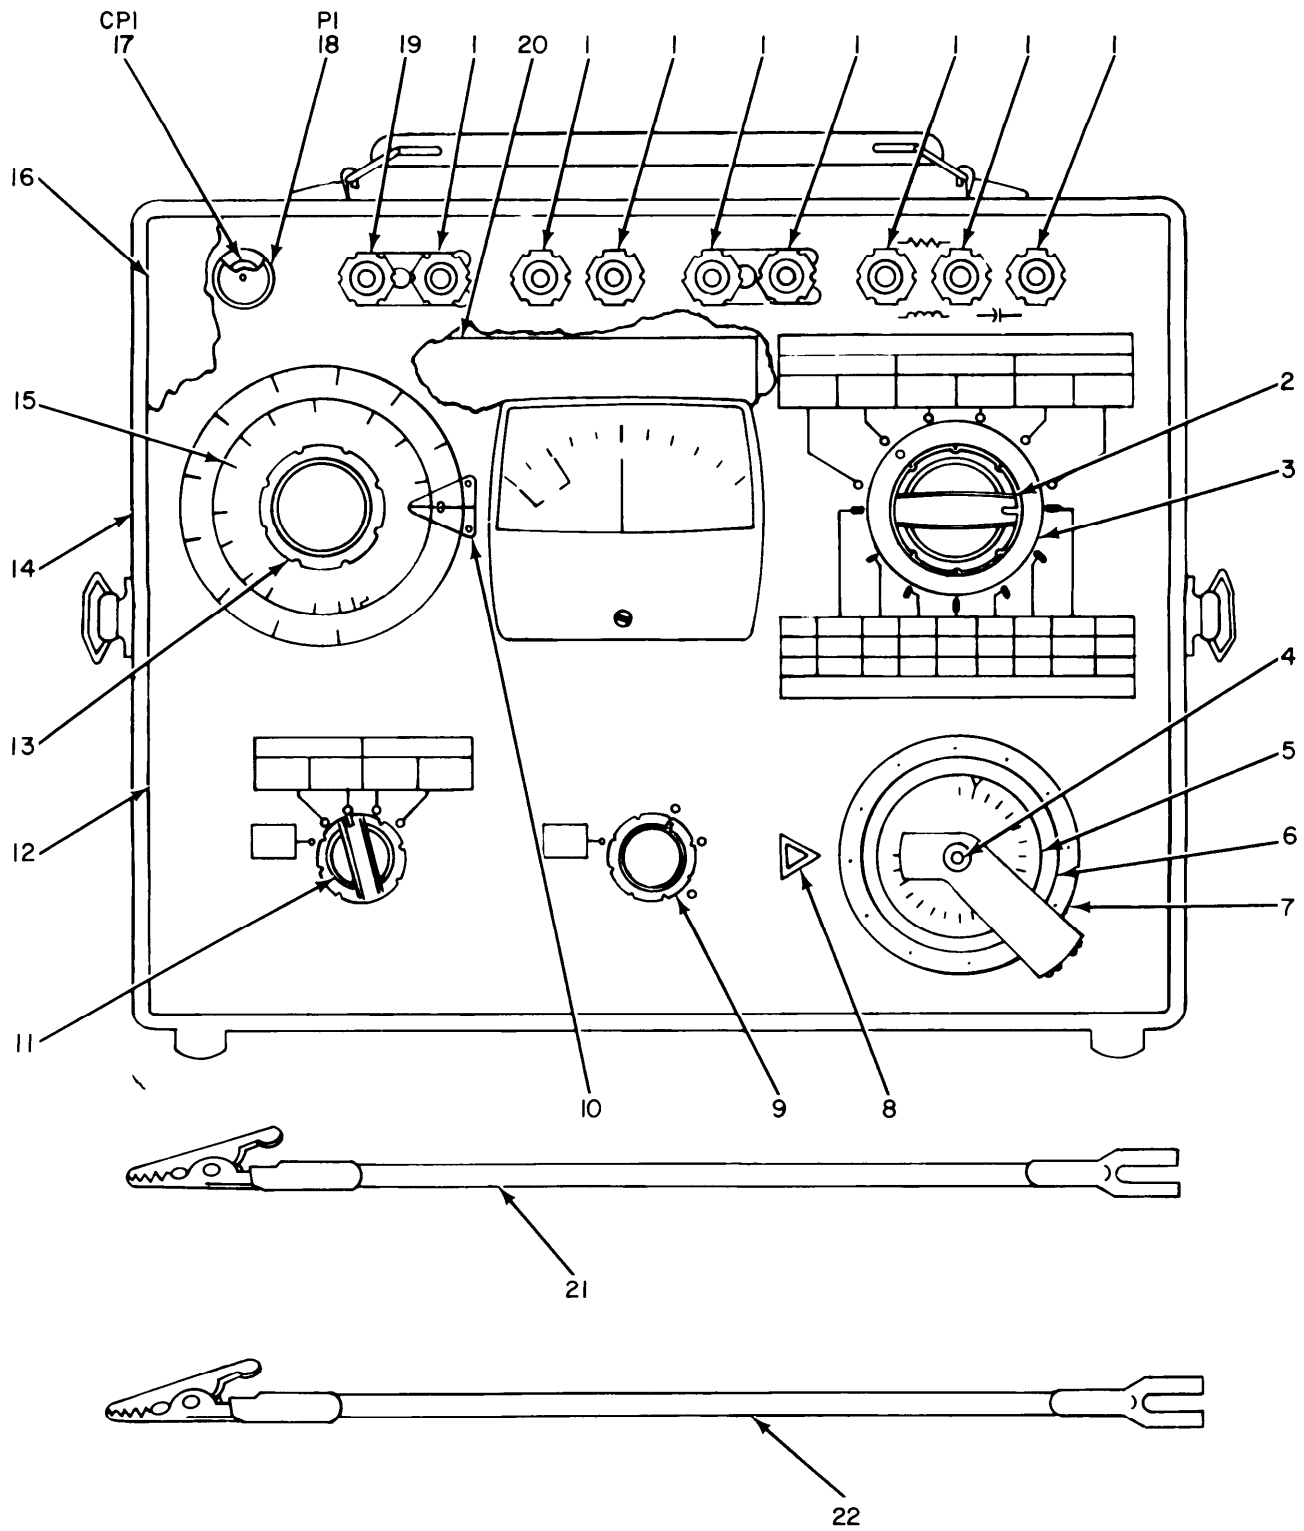

ELIJX001

Figure 1. Bridge, Capacitance-Inductance-Resistance ZM-70/U.



SECTION II		TM11-6625-2597-40P						
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION					DESCRIPTION		QTY	
(A)	(B)	NATIONAL	PART	FSCM		USABLE ON CODE	INC	
FIG	ITEM	STOCK	NUMBER			U/M	IN	
NO.	NO.	NUMBER					UNIT	
GROUP 00 BRIDGE,CAPACITANCE-INDUCTANCE-								
RESISTANCE ZM-70/U								
1	1	PAHZZ 4935-00-761-8900	1170	11837	CAP,BDG POST	EA	8	
1	2	PAHZZ 5355-00-953-8880	1266	11837	KNOB	EA	1	
1	3	XDHZZ	4880	11837	DIAL,PLATE	EA	1	
1	4	XDHZZ	73016	11837	BUSHING,SLEEVE	EA	1	
1	5	XDHZZ	4970	11837	DIAL,CONTROL	EA	1	
1	6	XDHZZ	4775	11837	DIAL,CONTROL	EA	1	
1	7	XDHZZ	75292	11837	DIAL,CONTROL	EA	1	
1	8	XDHZZ	73019	11837	POINTER,DIAL	EA	1	
1	9	PAHZZ 5355-00-933-5677	1268	11837	KNOB	EA	1	
1	10	XDHZZ	13196	11837	POINTER,DIAL	EA	1	
1	11	XDHZZ	1270	11837	KNOB	EA	1	
1	12	XDHZZ	13206	11837	PANEL,BRIDGE	EA	1	
1	13	PAHZZ 5355-00-960-7462	1271	11837	KNOB	EA	1	
1	14	XDHZZ	13251	11837	CASE,BRIDGE	EA	1	
1	15	XDHZZ	13197	11837	DIAL,CONTROL	EA	1	
1	16	XDHZZ	13252	11837	COVER,BRIDGE	EA	1	
1	17	XDHZZ	13279	11837	ADPTR,CONNECTOR	EA	1	
1	18	PAOZZ 5935-00-892-9035	13255	11837	CONNECTOR,PLUG	EA	1	
1	19	PAHZZ 4935-00-073-3112	1172	11837	CAP,BDG POST	EA	1	
1	20	XDHZZ	6589	11837	CLIP,ELECTRICAL	EA	1	
1	21	XDHZZ 6625-00-894-2590	4148	11837	LEAD,TEST	EA	1	
1	22	XDHZZ 6625-00-894-2589	4160	11837	LEAD,TEST	EA	1	

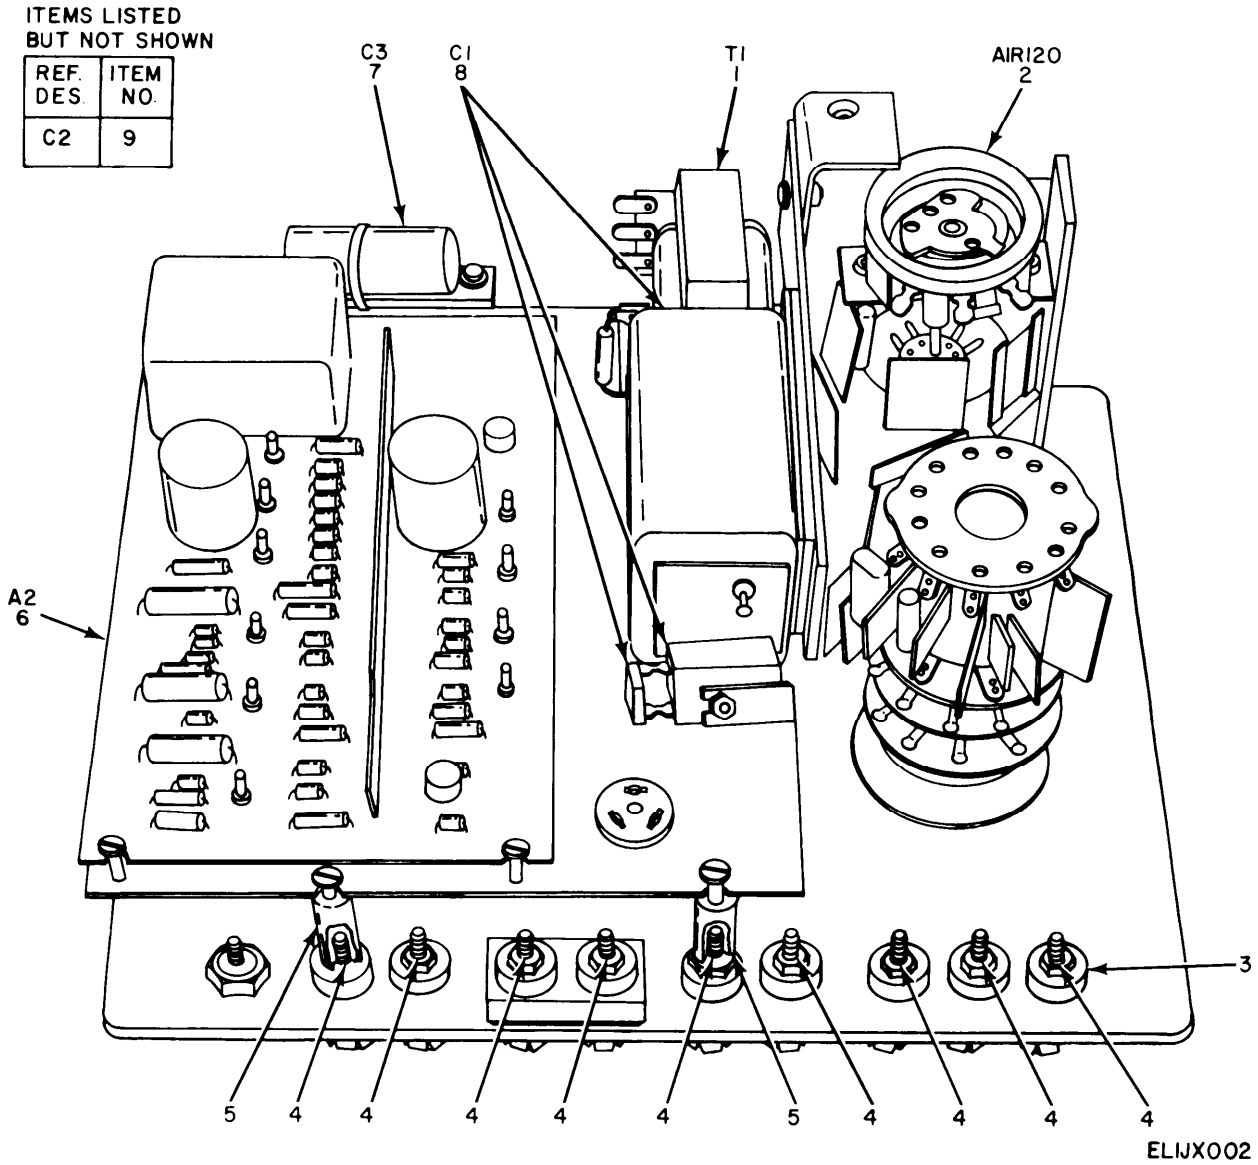


Figure 2. Bridge, Capacitance-Inductance-Resistance ZM-70/U, Front Panel Back View, Additional Parts.

SECTION II					TM11-6625-2597-40P			
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	
ILLUSTRATION								
(A)	(B)	NATIONAL			DESCRIPTION		QTY	
FIG	ITEM	STOCK	PART	FSCM		USABLE ON CODE	INC	
NO.	NO.	NUMBER	NUMBER				IN	
							UNIT	
2	1	PAHZZ 5950-00-007-0848	13273	11837	XFMR, POWER		EA	1
2	2	PAHZZ 5905-00-007-7345	4969	11837	RHEOSTAT		EA	1
2	3	PAHZZ 4935-00-789-7542	8823	11837	INSULATOR, WSHR		EA	8
2	4	PAHZZ 4935-00-073-3113	1393	11837	POST, BINDING		EA	9
2	5	PAHZZ 5940-00-450-6887	3247	11837	TERMINAL, LUG		EA	2
2	6	XDHDL	13216	11837	GENERATOR-DET		EA	1
2	7	PAHZZ 5910-00-622-0017	109D108X0010T2	56289	CAP, FXD, ELCTLT		EA	1
2	8	PAHZZ 5910-00-948-3009	4197	11837	CAPACITOR ASSY		EA	1
2	9	PAHZZ 5910-00-998-5450	CSR13B187KM	81349	CAP, FXD, ELCTLT		EA	1

ITEMS LISTED BUT NOT SHOWN


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C4	14	R7	23
C5	15	R8	24
C6	16	R9	25
C7	17	RI0	26
C8	18	RI1	23
C9	19	RI2	24
R4	20	S2	27
R5	21	S4	28
R6	22	S5	29

NOTE: PREFIX REF. DES. WITH S3

ITEMS LISTED BUT NOT SHOWN

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
RI00	10	RI10	12
RI01	11	RI11	13
RI02	11	RI12	13
RI03	11	RI13	13
RI04	11	RI14	13
RI05	11	RI15	13

NOTE: PREFIX REF. DES. WITH A1

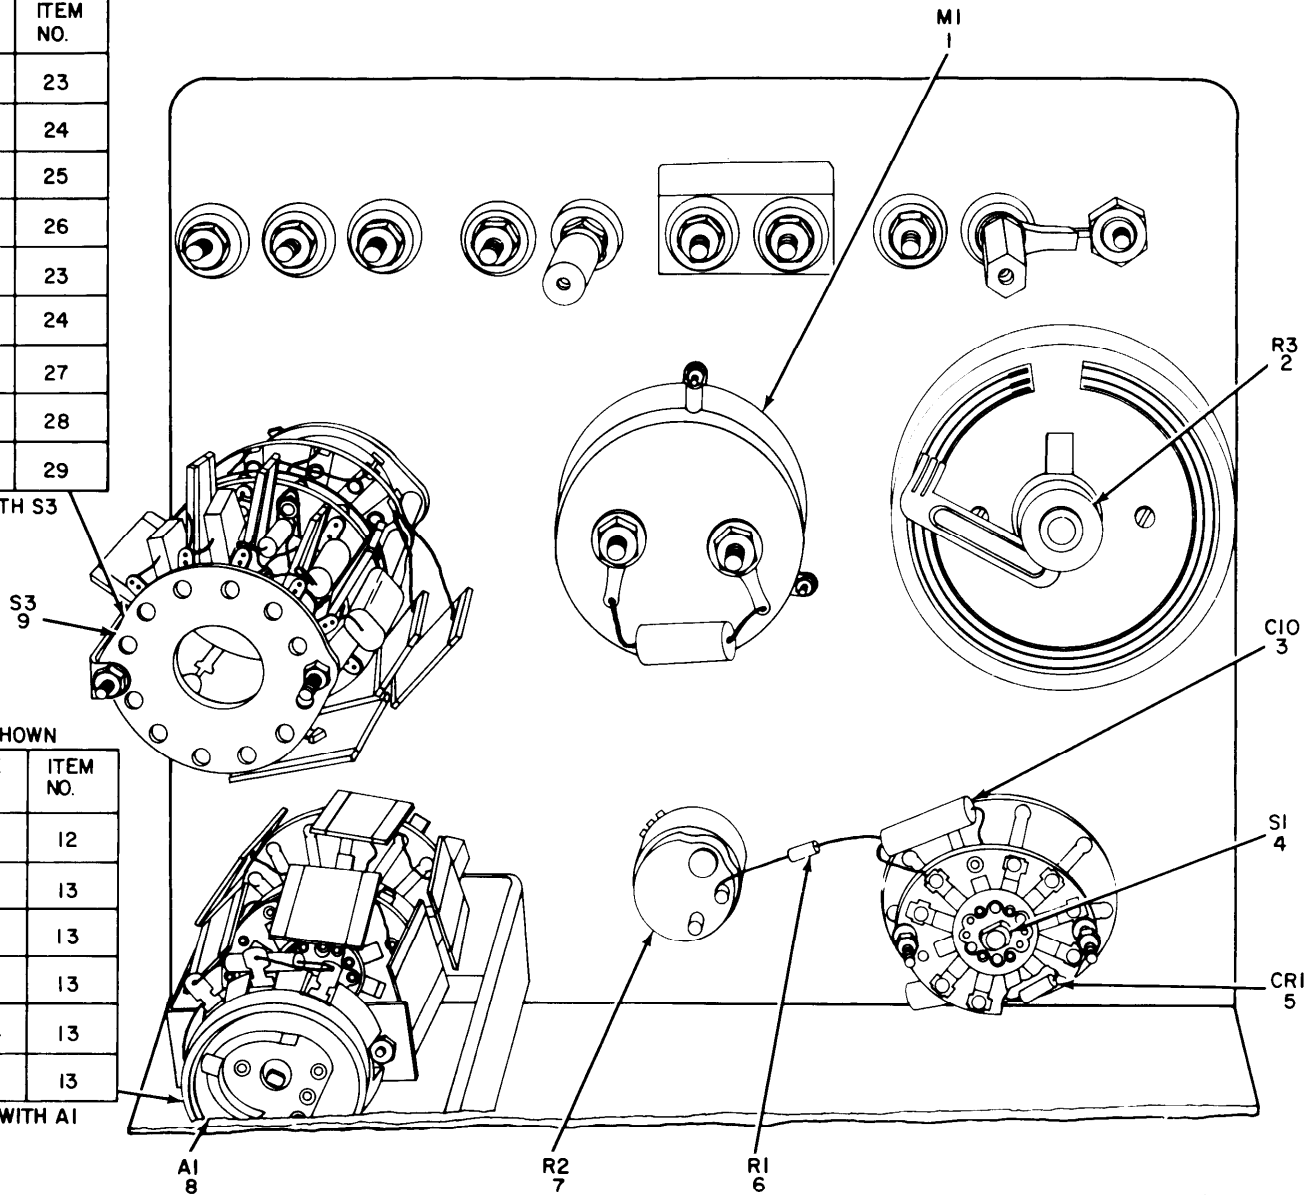

ELIJX003

Figure 3. Bridge, Capacitance-Inductance-Resistance ZM-70/U, Back View and Additional Parts.

SECTION II (1) ILLUSTRATION		(2)	(3)	(4)	(5)	TM11-6625-2597-40P (6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	U/M IN UNIT
3	1	XDHZZ		13194	11837	METER, NULL		EA 1
3	2	XDHZZ		13249	11837	RHEOSTAT ASSY		EA 1
3	3	XDHZZ		WMF1S1-10	14655	CAP, FXD, PLASTIC		EA 1
3	4	PAHZZ	5930-00-006-7239	13207	11837	SWITCH ASSY		EA 1
3	5	PAHZZ	5961-00-615-0095	1N276	81349	SEMICONDUCTOR DEVIC		EA 1
3	6	XDHZZ		1631	11837	RES, FXD, FILM		EA 1
3	7	XDHZZ		13253	11837	RESISTOR, VAR		EA 1
3	8	XDHHH		13248	11837	RESISTOR, DECADE		EA 1
3	9	PAHHH	5930-00-006-7240	13250	11837	SWITCH ASSY		EA 1
3	10	XDHZZ		4890	11837	RES, FXD, WW		EA 1
3	11	XDHZZ		4889	11837	RES, FXD, WW		EA 5
3	12	PAHZZ	5905-00-930-0568	4884	11837	RES, FXD, WW		EA 1
3	13	PAHZZ	5905-00-930-0567	4883	11837	RES, FXD, WW		EA 5
3	14	XDHZZ		B1L474K	12406	CAP, FXD, PLASTIC		EA 1
3	5	XDHZZ		WMF1P47-10	14655	CAP, FXD, PLASTIC		EA 1
3	16	XDHZZ		WMF1D47-10	14655	CAP, FXD, PLASTIC		EA 1
3	17	XDHZZ		CM15CD511J03	81349	CAP, FXD, MICA		EA 1
3	18	XDHZZ		CM15CD510J03	81349	CAP, FXD, MICA		EA 1
3	19	XDHZZ		DM15C040F0500WV4 CR	84171	CAP, FXD, MICA		EA 1
3	20	XDHZZ		13296	11837	RES, FXD, WW		EA 1
3	21	XDHZZ		13297	11837	RES, FXD, WW		EA 1
3	22	XDHZZ		13261	11837	RES, FXD, WW		EA 1
3	23	XDHZZ		13274	11837	RES, FXD, WW		EA 2
3	24	XDHZZ		13276	11837	RES, FXD, WW		EA 2
3	25	XDHZZ		13298	11837	RES, FXD, WW		EA 1
3	26	PAHZZ	5905-00-007-9114	RN65E9902B	81349	RES, FXD, FILM		EA 1
3	27	PAHZZ	5930-00-006-7242	13257	11837	SWITCH SECTION		EA 1
3	28	PAHZZ	5930-00-006-7241	13256	11837	SWITCH SECTION		EA 1
3	29	PAHZZ	5930-00-006-7243	2221	11837	SWITCH SECTION		EA 1

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX.

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5930-00-006-7239	3	4	5910-00-622-0017	2	7
5930-00-006-7240	3	9	4935-00-761-8900	1	1
5930-00-006-7241	3	28	5935-00-892-9035	1	18
5930-00-006-7242	3	27	6625-00-894-2589	1	22
5930-00-006-7243	3	29	6625-00-894-2590	1	21
5950-00-007-0848	2	1	5905-00-930-0567	3	13
5905-00-007-7345	2	2	5905-00-930-0568	3	12
5905-00-007-9114	3	26	5910-00-948-3009	2	8
5940-00-450-6887	2	5	5910-00-998-5450	2	9
5961-00-615-0095	3	5			

PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
				13255	11837	1	18
B1L474K	12406	3	14	13256	11837	3	28
CM15CD510J03	81349	3	18	13257	11837	3	27
CM15CD511J03	81349	3	17	13261	11837	3	22
CSR13B187KM	81349	2	9	13273	11837	2	1
DM15C040F0500WV4CR	84171	3	19	13274	11837	3	23
RN65E9902B	81349	3	26	13276	11837	3	24
WMF1D47-10	14655	3	16	13279	11837	1	17
WMF1P47-10	14655	3	15	13296	11837	3	20
WMF1S1-10	14655	3	3	13297	11837	3	21
1N276	81349	3	5	13298	11837	3	25
109D108X0010T2	56289	2	7	1631	11837	3	6
1170	11837	1	1	2221	11837	3	29
1172	56289	1	19	3247	11837	2	5
1266	11837	1	2	4148	11837	1	21
1268	11837	1	9	4160	11837	1	22
1270	11837	1	11	4197	11837	2	8
1271	11837	1	13	4775	11837	1	6
13194	11837	3	1	4880	11837	1	3
13196	11837	1	10	4883	11837	3	13
13197	11837	1	15	4884	11837	3	12
13206	11837	1	12	4889	11837	3	11
13207	11837	3	4	4890	11837	3	10
13216	11837	2	6	4969	11837	2	2
13248	11837	3	8	4970	11837	1	5
13249	11837	3	2	6589	11837	1	20
13250	11837	3	9	73016	11837	1	4
13251	11837	1	14	73019	11837	1	8
13252	11837	1	16	75292	11837	1	7
13253	11837	3	7	8823	11837	2	3

## LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
4935-00-073-3112	1	19	5355-00-953-8880	1	2
4935-00-073-3113	2	4	5355-00-960-7462	1	13
4935-00-789-7542	2	3			

## LATEST PART NUMBER ASSIGNMENT

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
1393	11837	2	4

## ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENT

STOCK NUMBER	FIG. NO.	ITEM NO.
5355-00-933-5677	1	9

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

Commander  
Stateside Army Depot  
ATTN: AMSTA-US  
Stateside, NJ 07703

DATE SENT

10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.  
Reason: Accuracy.

Identify the cover on the junction box (item no 5)  
Reason: It is a separate item as is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.  
Reason: Same as above.

SAMPLE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I.M. DeSpirito 999-1776

SIGN HERE:

*SSG I.M. DeSpirito*

DA FORM 2028-2  
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

\_\_\_\_\_  
\_\_\_\_\_

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE



RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

**SOMETHING WRONG WITH THIS PUBLICATION?**

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-2597-40P

PUBLICATION DATE

11 Jun 80

PUBLICATION TITLE

Bridge, Capacitance-Inductance Resistance ZM-70/U

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG PERFORATED LINE

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

\_\_\_\_\_  
\_\_\_\_\_

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL!

**SOMETHING WRONG WITH THIS PUBLICATION?**

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-2597-40P

PUBLICATION DATE

11 Jun 80

PUBLICATION TITLE

Bridge, Capacitance-Inductance Resistance ZM-70/U

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO

PARA-GRAPH

FIGURE NO

TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

\_\_\_\_\_  
\_\_\_\_\_

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL -ME-MQ  
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

**SOMETHING WRONG WITH THIS PUBLICATION?**

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-2597-40P

PUBLICATION DATE

11 Jun 80

PUBLICATION TITLE

Bridge, Capacitance-Inductance Resistance ZM-70/U

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
---------	------------	-----------	----------

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

FILL IN YOUR  
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

\_\_\_\_\_  
\_\_\_\_\_

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL -ME-MQ  
Fort Monmouth, New Jersey 07703

TEAR ALONG PERFORATED LINE

By Order of the Secretary of the Army:

E. C. MEYER  
*General, United States Army*  
*Chief of Staff*

Official:

J. C. PENNINGTON  
*General, United States Army*  
*The Adjutant General*

DISTRIBUTION :

*Active Army:*

USAINSCOM (2)  
DARCOM (1)  
OS Maj Comd (3)  
TECOM (2)  
USACC (5)  
USACC Sig Gp Okinawa (10)  
USACC Sig Gp Taiwan (10)  
USACC-PAC (2)  
USACC Sig Bde, Korea (2)  
Eighth USA (3)  
I Corps (2)  
USAICS (3)  
USASIGS (5)  
HISA (Ft Monmouth) (26)  
DCA, Japan Rqn (1)  
DCA (1)            Depots (1) except

Depots (1) except  
SAAD (20)  
TOAD (14)  
LBAD (5)  
USA Dep (PAC) (2)  
MAAG, Republic of China (2)  
USACSA (3)  
JUSMAG, Korea (1)  
USA Camp Carroll Depot (2)  
Units org under fol TOE:  
11-302 (1)  
29-134 (1)  
29-136 (1)  
29-207 (2)  
29-610 (2)

NG: None

USAR: None

For explanation of abbreviations used see, AR 310-50.

DEPARTMENT OF THE ARMY  
US ARMY AG PUBLICATIONS CENTER  
1655 WOODSON ROAD  
ST. LOUIS, MISSOURI 63114

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314

