

DEPARTMENT OF THE ARMY TECHNICAL MANUAL

**DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS (INCLUDING
DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
TEST OSCILLATOR SET AN/PRM-10
FSN 6625-521-6807**

**Headquarters, Department of the Army, Washington, D.C.
28 September 1973**

Current *as of* February 1973

	Paragraph	Page
Section I. INTRODUCTION		
Scope	1-1	2
General	1-2	2
Explanation of columns	1-3	2
Special information	1-4	4
Location of repair parts	1-5	4
Abbreviations (Not applicable)	1-6	4
Reporting of equipment publication improvements	1-7	4
II. REPAIR PARTS LIST		6-10
III. SPECIAL TOOLS, TEST AND SUPPORT EQUIPMENT (Not applicable)		
IV. INDEX -FEDERAL STOCK NUMBER AND REFERENCE NUMBER CROSS-REFERENCE TO FIGURE AND ITEM NUMBER		11

*This manual supersedes TM 11-6625-276-35P, 3 July 1962.

SECTION I

INTRODUCTION

1-1. Scope

This manual lists repair parts and special tools required for the performance of direct support, general support, and depot maintenance of the AN/PRM-10. The PCCN for the AN/PRM-10 is GTEAAV for all models.

1-2. General

This repair parts and special tools list is divided into the following sections:

a. **Repair Parts** list - Section II. A list of repair parts authorized for the performance of maintenance at the direct support, general support, and depot level. This **repair** parts list is arranged in alphabetical order.

b. **Special Tools, Test and Support Equipment** - Section III. Not applicable.

c. **Index-Federal Stock Number, and Reference Number Cross-Reference to Figure and Item Number**-Section IV. A list, in ascending numerical sequence, of all Federal stock numbers appearing in the listings, followed by a list, in alphabetic sequence, of all reference numbers appearing in the listings. Federal stock number and reference numbers are cross-referenced to each illustration figure and item

1-3. Explanation of columns

The following provides an explanation of columns found in the tabular list.

a. **Source, Maintenance, and Recoverability Codes (SMP).**

(1) **Source Code.** Indicates the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are—

<i>Code</i>	<i>Explanation</i>
PA	Item procured and stocked for anticipated or known usage.
PB	Item procured and stocked for insurance purposes because essentiality dictates that a minimum quantity be available in the supply systems.
PC	Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature.
PD	Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.

<i>Code</i>	<i>Explanation</i>
PE	Support equipment procured and stocked for initial issue or outfitting to specified maintenance repair activities.
PF	Support equipment which will not be stocked but which will be centrally procured on demand.
PG	Item procured and stocked to provide for sustained support for the life of the equipment. It is applied to an item peculiar to the equipment which because of probable discontinuance or shutdown of production facilities would prove uneconomical to reproduce at a later time.
KD	An item of depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items required at the time of overhaul or repair.
KF	An item of a maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or direct support or general support levels of maintenance.
KB	Item included in both a depot overhaul/repair kit and a maintenance kit.
MO	Item to be manufactured or fabricated at organizational level.
MF	Item to be manufactured or fabricated at direct support maintenance level.
MH	Item to be manufactured or fabricated at general support maintenance level.
MD	Item to be manufactured or fabricated at depot maintenance level.
AO	Item to be assembled at organizational level.
AF	Item to be assembled at direct support maintenance level.
AH	Item to be assembled at general support maintenance level.
AD	Item to be assembled at depot maintenance level.
XA	Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.
XB	Item is not procured or stocked. If not available through salvage, requisition.
XC	Installation drawing, diagram instruction sheet, field service drawing, that is identified by manufacturers' part number.
XD	Support items can be requisitioned with justification.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) **Maintenance code.** Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code Format as follows:

(a) Use (**third** position). The maintenance code entered in the third position indicates the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position indicates one of the following levels of maintenance.

code	<i>Application/Explanation</i>
O -	Support item is removed, replaced, used at the organizational level of maintenance.

NOTE

A code "C" may be used in this position to denote crew or operator maintenance performed within organizational maintenance.

F -	Support item is removed, replaced, used at the direct support maintenance level.
H -	Support item is removed, replaced, used at the general support maintenance.
D -	Support items that are removed, replaced, used at depot only.

(b) Repair (**fourth** position). The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). When a maintenance code is not used a dash (-) sign is entered. For multiservice equipment/systems or when a code is entered, this position will contain one of the following maintenance codes as assigned by the service(s) that require the code:

Code	<i>Application/Explanation</i>
O -	The lowest maintenance level capable of complete repair of the support item is the organizational level.
F -	The lowest maintenance level capable of complete repair of the support item is direct support.
H -	The lowest maintenance level capable of complete repair of the support item is general support.
D -	The lowest maintenance level capable of com-

Code	<i>Application/Explanation</i>
	plete repair of the support item is the depot level.
L -	Repair restricted to designated Specialized Repair Activity.
Z -	Non-repairable. No repair is authorized.
B -	No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item.

(3) **Recoverability code.** Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the uniform SMR Code Format as follows:

Code	<i>Explanation</i>
Z -	Nonrepairable item. When unserviceable, condemn and dispose at the level indicated in the first digit of the maintenance code.
O -	Repairable item. When uneconomically repairable, condemn and dispose at organizational level.
F -	Repairable item. When uneconomically repairable, condemn and dispose at the direct support level.
H -	Repairable item. When uneconomically repairable, condemn and dispose at the general support level.
D -	Repairable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
L -	Repairable item. Repair, condemnation, and disposal not authorized below depot/Specialized Repair Activity level.
A -	Item requires special handling or condemnation procedures because of specific reasons (Le., precious metal content, high dollar value, critical material or hazardous material).

b. **Federal Stock Number.** Indicates the Federal stock number assigned to the item and will be used for requisitioning purposes.

c. **Description** Indicates the Federal item name and a minimum description required to identify the item. **The last line indicates the reference number followed by the applicable Federal Supply Code for Manufacturer (FSCM) in parentheses. The FSCM is used as an element in item identification to designate manufacturer or distributor or Government agency, etc., and is identified in SB 708-42.**

d. **Unit of Measure (U/M).** Indicates the standard or basic quantity by which the listed item is used in per-

forming the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation: e.g., ea, in, pr, etc., and is the basis used to indicate quantities and allowances in subsequent columns. When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

e. Quantity Incorporated in Unit. This column indicates the quantity of the item used in the equipment. Subsequent appearances of the same item in the same assembly are indicated by the letters "REF".

f. 30-Day DS/GS Maintenance Allowances.

NOTE

Allowances in GS column are for GS maintenance only.

(1) The repair parts indicated by asterisk entries in separate allowance columns for DS and GS represent those authorized for use at that category of maintenance to be requisitioned on an "as required" basis, until stockage is based on demand in accordance with AR 710-2.

(2) Allowance quantities are indicated in the special tool lists section for special tools, TMDE, and other support equipment.

g. 1-Year Allowances Per 100 Equipments/Contingency Planning Purposes. Column intentionally left blank.

h. Depot Maintenance Allowance Per 100 Equipments. This column indicates opposite the first appearance of each item the total quantity authorized for depot maintenance of 100 equipments.

i. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown in TM 11-6625-276-24.

(2) *Item number.* Indicates the item number or reference designation used to reference the item in the illustration.

1-4. Special Information

a. Usable on codes are included in column 3. **Uncoded items are applicable to all models. Identification of the usable on codes used in this publication are—**

<i>Code</i>	<i>Used on</i>
AGE	AN/PRM-10

b. The following publications pertain to the AN/PRM-10 and its components:

TM 11-6625-276-10 Operator's Manual: Test Oscillator Set AN/PRM-10.

TM 11-6625-276-20P Organizational Maintenance

Repair Parts and Special Tools List; Test Oscillator Set AN/PRM-10.

TM 11-6625-276-24 Organizational and Field Maintenance Manual: Test Oscillator Set AN/PRM-10.

TM 11-6625-276-50 Depot Maintenance Manual: Test Oscillator Set AN/PRM-10.

1-5. Location of Repair Parts

a. This manual contains one cross-reference index (sec IV) to be used to locate a repair part when either the Federal stock number or reference number (manufacturer's part number) is known. The first column in the index is prepared in numerical or alphanumeric sequence in ascending order. The reference numbers (manufacturer's part numbers) are listed immediately following the last listed Federal stock number in the index of Federal stock numbers.

b. When the Federal stock number or reference number is known, follow the procedures given in (1) and (2) below.

(1) Refer to the index of Federal stock numbers (sec IV) and locate the Federal stock number or reference number. The FSN and reference number are cross-referenced to the applicable figure and item number or reference designation.

(2) **Refer to the repair parts list (sec II) and locate the figure number (col 10a) and item number or reference designation (col 10b) as noted in the FSN index.**

c. **When the figure and item number or reference designation are known, scrutinize columns 10a and 10b of the repair parts list (sec II) until the item is located.**

d. When the FSN, reference number, figure number, item number and reference designation are not known, scrutinize column 3 of the repair parts list (sec II) which is arranged in alphabetical order.

1-6. Abbreviations

Not applicable.

1-7. Reporting of Equipment Publication

I m p r o v e m e n t s

The reporting of errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to Publications) and forwarded direct to Commander, US Army Electronics Command, ATTN: AMSEL-MA-CRA, Fort Monmouth, N.J., 07703.

(Next printed page is 6)

SECTION II

T M 1 1 - 6 6 2 5 - 2 7 6 - 3 4 P

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE			(7) 30-DAY GS MAINT ALLOWANCE			(8) 1-YR ALW PER 100 EQUIP CNTGCT	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATION	
					(a)	(b)	(c)	(a)	(b)	(c)			(a)	(b)
					1-20	21-50	51-100	1-20	21-50	51-100			FIGURE NO.	ITEM NO.
PAHZZ	6145-548-1258	ABLE, POWER, ELECTRICAL W101 P/O POWER. SUPPLY GROUP :002MGF2-18-0310 (81349)	FT	7				*	*	*		70	4-1	W101
PAHZZ	6145-542-6125	ABLE, SPECIAL PURPOSE ELECTRICAL W102... P/O POWER SUPPLY GROUP :154M7172 (81849)	FT	6				*	*	*		60	4-1	W102
PAOZZ	5920-542-8711	AP, ELECTRICAL NO-REF-DESIG FUSEHOLDER. AP P/O POWER SUPPLY GROUP :1758-1-2 (71400)	EA	2	*	*	*	*	*	*		3	1-2	8
PAHZZ	5910-270-5185	APACITOR, FIXED, PAPER DIELECTRIC C101... :1000 UUF PORM10PCT P/O POWER SUPPLY GROUP :P7081E-805K (81349)	EA	1				*	*	*		3	7-2	C101
PAHZZ	5910-101-4884	APACITOR, FIXED MICA DIELECTRIC C103.... :1000 UUF PORM5PCT P/O POWER SUPPLY GROUP :M20B511J (81349)	EA	1				*	*	*		3	7-2	C103
PAHZZ	5910-101-4023	APACITOR, FIXED, MICA DIELECTRIC C104.... :1000 UUF PORM10PCT P/O POWER SUPPLY GROUP :M30B102K (81349)	EA	1				*	*	*		3	7-2	C104
PAHZZ	5910-101-5781	APACITOR, FIXED, MICA DIELECTRIC C102.... :1000 UUF PORM5PCT P/O POWER SUPPLY GROUP :M30D202J (81349)	EA	2				*	*	*		3	7-2	C102
PAHZZ		APACITOR, FIXED, MICA DIELECTRIC C105.... :1000 UUF PORM5PCT P/O POWER SUPPLY GROUP :M30D202J (81349)	EA	2				*	*	*		3	7-2	C105
PAOZZ	5935149-4013	CONNECTOR, PLUG, ELECTRICAL P101 P/O.... POWER SUPPLY GROUP :7057 (83315)	EA	1	*	*	*	*	*	*		3	7-1	P101
PAOZZ	6625510-4682	COVER, TEST SET A102 P/O POWER SUPPLY... GROUP :154D7200 (81849)	EA	1	*	*	*	*	*	*		2		A102
PAOZZ	5960-503-4880	ELECTRON TUBE V102 P/O POWER SUPPLY..... GROUP :JA2 (81349)	EA	1	*	*	*	*	*	*		100	5-2	V102
PAOZZ	5960-188-0873	ELECTRON TUBE V103 P/O POWER SUPPLY..... GROUP :JAV6 (81349)	EA	1	*	*	*	*	*	*		100	5-2	V103
PAOZZ	5930-272-9182	ELECTRON TUBE V101 P/O POWER SUPPLY..... GROUP :JX4W (81349)	EA	1	*	*	*	*	*	*		100	5-2	V101
PAOZZ	5960-669-6861	ELECTRON TUBE V104 P/O POWER SUPPLY..... GROUP :J005-6AQ5W (81349)	EA	1	*	*	*	*	*	*		100	5-2	V104
PAOZZ	5920-235-8362	FUSE, CARTRIDGE F1J1 P/O POWER SUPPLY... GROUP :MDL3-10 (71400)	EA	2	*	*	*	*	*	*		50	1-2	F101
PAOZZ	590-235-8362	FUSE, CARTRIDGE F1J2 P/O POWER SUPPLY... GROUP :MDL3-10 (71400)	EA	2	*	*	*	*	*	*		50	1-2	F102
PAHZZ	5920-285-0755	FUSEHOLDER W101 LESS CAP P/O POWER..... SUPPLY GROUP :JJM (71400)	EA	2				*	*	*		3		W101

SECTION II

TM11-6625-276-34P

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE			(7) 30-DAY GS MAINT ALLOWANCE			(8) 1-YR ALW PER 100 EQUIP CNTGCT	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATION	
					(a)	(b)	(c)	(a)	(b)	(c)			(a)	(b)
					1-20	21-50	51-100	1-20	21-50	51-100			FIGURE NO.	ITEM NO.
AHZZ	5920-285-0755	FUSEHOLDER H102 LESS CAP P/O POWER..... SUPPLY GROUP HJM (71400)	EA	2				*	*	*		3		H102
AHZZ	5935-192-4789	JACK, TELEPHONE J101 P/O POWER SUPPLY... GROUP JJC89 (81350)	EA	2				*	*	*		3	7-2	J101
AHZZ	5935-192-4789	JACK, TELEPHONE J102 P/O POWER SUPPLY... GROUP JJC89 (81350)	EA	2				*	*	*		3	7-2	J102
AOZZ	6240-155-8706	LAMP, INCANDESCENT E101 P/O POWER SUPPLY GROUP 47 (24446)	EA	1	*	*	*	*	*	*		50		E101
AOZZ	6210-188-8779	LENS, INDICATOR LIGHT NO-REF-DESIG P/O.. FREQ METER GROUP 810B121 (72619)	EA	1	*	*	*	*	*	*		5		
AHZZ	6210-299-4099	LIGHT, INDICATOR I101 P/O POWER SUPPLY.. GROUP 810B-12 (72619)	EA	1				*	*	*		5	7-2	I101
AHZZ	5905-195-6806	RESISTOR, FIXED, COMPOSITION R207 1000.. OHM PORM5PCT 1-2 W P/O FREQ METER GROUP RC20GF102J (81349)	EA	1				*	*	*		3	7-2	R207
AHZZ	5905-192-0390	RESISTOR, FIXED, COMPOSITION R103 1 MEG.. PORM10PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF105K (81349)	EA	2				*	*	*		3	7-2	R103
AHZZ	5905-192-0390	RESISTOR, FIXED, COMPOSITION R104 1 MEG.. PORM10PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF105K (81349)	EA	2				*	*	*		3	7-2	R104
AHZZ	5905-192-9260	RESISTOR, FIXED, COMPOSITION R136 150... 000 OHM PORM10PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF154K (81349)	EA	1				*	*	*		3	7-2	R106
AHZZ	5905-279-1875	RESISTOR, FIXED, COMPOSITION R105 2 MEG.. PORM5PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF205J (81349)	EA	1				*	*	*		3	7-2	R105
AHZZ	5905-279-3497	RESISTOR, FIXED, COMPOSITION R109 39,000 OHM PORM5PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF393J (81349)	EA	1				*	*	*		3	7-2	R109
AHZZ	5905-537-6439	RESISTOR, FIXED, COMPOSITION R107 4700.. OHM PORM10PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF472K (81349)	EA	1				*	*	*		3	7-2	R107
AHZZ	5905-279-3495	RESISTOR, FIXED, COMPOSITION R108 75,000 OHM PORM5PCT 1-2 W P/O POWER SUPPLY GROUP RC20GF753J (81349)	EA	1				*	*	*		3	7-2	R108
AHZZ	5905-192-0626	RESISTOR, FIXED, COMPOSITION R101 12,000 OHM PORM10PCT 2 W P/O POWER SUPPLY GROUP RC42GF123K (81349)	EA	2				*	*	*		3	7-2	R101
AHZZ	5905-192-0626	RESISTOR, FIXED, COMPOSITION R102 12,000 OHM PORM10PCT 2 W P/O POWER SUPPLY GROUP CONTINUED	EA	REF				*	*	*		3	7-2	R102

SECTION II

TM11-6625-276-34P

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE		(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE			(7) 30-DAY GS MAINT ALLOWANCE			(8) 1-YR ALW PER 100 EQUIP CNTGCT	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATION		
						(a)	(b)	(c)	(a)	(b)	(c)			(a)	(b)	
						1-20	21-50	51-100	1-20	21-50	51-100			FIGURE NO.	ITEM NO.	
		CONTINUED														
PAOZZ	5960-272-9094	RC42GF123K (81349)	E105 P/O POWER....	EA	1	*	*	*	*	*	*		10		E105	
		SHIELD, ELECTRON TUBE SUPPLY GROUP														
PAOZZ	5960-295-7652	TS102U02 (81350)	E102 P/O POWER....	EA	3	*	*	*	*	*	*		10		E102	
		SHIELD, ELECTRON TUBE SUPPLY GROUP														
PAOZZ	5963-295-7652	TS102U03 (81350)	E103 P/O POWER....	EA	2	*	*	*	*	*	*		10		E103	
		SHIELD, ELECTRON TUBE SUPPLY GROUP														
PAOZZ	5963-295-7652	TS102U03 (81350)	E104 P/O POWER....	EA	2	*	*	*	*	*	*		10		E104	
		SHIELD, ELECTRON TUBE SUPPLY GROUP														
PAHZZ	5935-260-0516	TS102U03 (81350)	XV101 THRU XV104 .	EA	4				*	*	*		3	7-2	XV101	
		SOCKET, ELECTRON TUBE P/O POWER SUPPLY GROUP														
PAHZZ	5935-260-0516	TS102P01 (81350)	XV101 THRU XV104 .	EA	4				*	*	*		3	7-2	XV102	
		SOCKET, ELECTRON TUBE P/O POWER SUPPLY GROUP														
PAHZZ	5935-260-0516	TS102P01 (81350)	XV101 THRU XV104 .	EA	4				*	*	*		3	7-2	XV103	
		SOCKET, ELECTRON TUBE P/O POWER SUPPLY GROUP														
PAHZZ	5935-260-0516	TS102P01 (81350)	XV101 THRU XV104 .	EA	4				*	*	*		3	7-2	XV104	
		SOCKET, ELECTRON TUBE P/O POWER SUPPLY GROUP														
PAHZZ	5930-615-7896	MS25098-22 (81349)	S101 P/O POWER SUPPLY....	EA	2				*	*	*		5	7-2	S101	
		SWITCH, TOGGLE GROUP														
PAHZZ	5930-615-7896	MS25098-22 (81349)	S102 P/O POWER SUPPLY....	EA	2				*	*	*		5	7-2	S102	
		SWITCH, TOGGLE GROUP														
PAHZZ	5930-669-7317	MS25098-22 (81349)	S103 P/O POWER SUPPLY....	EA	1				*	*	*		5	7-2	S103	
		SWITCH, TOGGLE GROUP														
PAHZZ	5950-510-4619	MS25098-23 (81349)	T101 P/O POWER SUPPLY GROUP	EA	1				*	*	*		3	7-2	T101	
		TRANSFORMER, POWER STEP-DOWN AND STEP-UP.. 7661 (56857)														
PAHZZ	6625-539-8152	MR26W100DCUAR (81349)	M201 P/O FREQ METER GROUP	EA	1				*	*	*		3	7-2	M201	
		AMMETER														
PAHZZ	5910-537-5253	483D5625 (58923)	C201 P/O FREQ METER GROUP	EA	1				*	*	*		2	7-2	C201	
		CAPACITOR, VARIABLE, AIR DIELECTRIC P/O FREQ METER GROUP														
PAHZZ	5915-577-9165	483A5575 (58923)	NO-REF-... DESIG P/O FREQ METER GROUP	EA	1				*	*	*		3			
		COIL ASSEMBLY, RADIO FREQUENCY 483A5575 (58923)														
PAOZZ	5950-571-2437	A1044-48389000 (58923)	Z101 2-5 MC P/O..	EA	1	*	*	*	*	*	*		3	1-2	Z101	
		COIL, RADIO FREQUENCY FREQ METER GROUP														
PAOZZ	5950-647-9154	T15407186 (81849)	Z202 5-10 MC P/O..	EA	1	*	*	*	*	*	*		3	1-2	Z202	
		COIL, RADIO FREQUENCY FREQ METER GROUP														

SECTION II

TM11-6625-276-34P

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE	(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE			(7) 30-DAY GS MAINT ALLOWANCE			(8) 1-YR ALW PER 100 EQUIP CNTGCTY EQUIP	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATION	
					(a)	(b)	(c)	(a)	(b)	(c)			(a)	(b)
					1-20	21-50	51-100	1-20	21-50	51-100			FIGURE NO.	ITEM NO.
PAOZZ	5950-545-5512	COIL, RADIO FREQUENCY Z203 10-22 MC P/O FREQ METER GROUP A1042 (58179)	EA	1	*	*	*	*	*	*	3	1-2	Z203	
PAOZZ	5955-647-9510	COIL, RADIO FREQUENCY Z204 22-45 MC P/O FREQ METER GROUP T15407188 (81849)	EA	1	*	*	*	*	*	*	3	1-2	Z204	
PAOZZ	5950-647-9509	COIL, RADIO FREQUENCY Z205 45 TO 100 MC P/O FREQ METER GROUP T15407185 (81849)	EA	1	*	*	*	*	*	*	3	1-2	Z205	
PAOZZ	5953-646-3383	COIL, RADIO FREQUENCY Z206 10J TO 250... MC P/O FREQ METER GROUP A1037 (58179)	EA	1	*	*	*	*	*	*	3	1-2	Z206	
PAOZZ	5953-346-5981	COIL, RADIO FREQUENCY Z207 25J TO 430... MC P/O FREQ METER GROUP A1061 (58179)	EA	1	*	*	*	*	*	*	3	1-2	Z207	
PAHZZ	5913-523-9959	CONTACT, ELECTRICAL E201 P/O FREQ METER. GROUP T15407149 (81849)	EA	1				*	*	*	3	7-2	E201	
PAHZZ	5910-537-4373	CONTACT, ELECTRICAL E202 P/O FREQ METER. GROUP T15407161 (81849)	EA	1				*	*	*	3		E202	
PAHZZ	6625-510-4683	DIAL, SCALE I201 P/O FREQ METER GROUP .. T154M7211 (81849)	EA	1				*	*	*	3		I201	
PAOZZ	5960-116-9978	ELECTRON TUBE V201 P/O FREQ METER GROUP 955 (81349)	EA	1	*	*	*	*	*	*	100	7-2	V201	
PAHZZ	5823-699-5455	GEAR, SPUR Q202 P/O FREQ METER GROUP ... T154M717 (81849)	EA	1				*	*	*	3		Q202	
PAHZZ	3020-540-4248	GEAR, SPUR Q203 P/O FREQ METER GROUP ... T154M7148 (81849)	EA	1				*	*	*	3		Q203	
PAOZZ	5355-668-9157	KNOB H201 P/O FREQ METER GROUP S619-640C88 (75376)	EA	2	*	*	*	*	*	*	3		H201	
PAOZZ	5355-668-9157	KNOB H202 P/O FREQ METER GROUP S619-640C88 (75376)	EA	2	*	*	*	*	*	*	3		H202	
PAHZZ	5905-195-6761	RESISTOR, FIXED, COMPOSITION R204 100... Q30 OHM PORM5PCT 1-2 W P/O FREQ METER GROUP RC20GF104J (81349)	EA	1				*	*	*	3	7-2	R204	
PAHZZ	5935-279-2669	RESISTOR, FIXED, COMPOSITION R201 13,000 OHM PORM5PCT 1-2 W P/O FREQ METER GROUP RC20GF133J (81349)	EA	1				*	*	*	3	7-2	R201	
PAHZZ	5905190-8876	RESISTOR, FIXED, COMPOSITION R206 15,000 OHM PORM10PCT 1-2 W P/O FREQ METER GROUP RC20GF153K (81349)	EA	1				*	*	*	3	7-2	R206	
PAHZZ	5915-192-3973	RESISTOR, FIXED, COMPOSITION R202 470... 4 PORM5PCT 1-2 W P/O FREQ METER GROUP 20GF471J (81349)	EA	1				*	*	*	3	7-2	R202	
PAHZZ	5935-279-2516	RESISTOR, FIXED, COMPOSITION R203 510... J00 OHM PORM5PCT 1-2 W P/O FREQ METER GROUP RC20GF514J (81349)	EA	1				*	*	*	3	7-2	R203	
PAHZZ	5935-108-6176	RESISTOR, VARIABLE R205 P/O FREQ METER... CONTINUED	EA	2				*	*	*	3	7-2	R205	

SECTION II

TM11-6625-276-34P

(1) SMR CODE	(2) FEDERAL STOCK NUMBER	(3) DESCRIPTION REFERENCE NUMBER & MFR. CODE USABLE ON CODE		(4) UNIT OF MEAS	(5) QTY INC IN UNIT	(6) 30-DAY DS MAINT ALLOWANCE			(7) 30-DAY GS MAINT ALLOWANCE			(8) 1-YR ALW PER 100 EQUIP CNTGCT	(9) DEPOT MAINT ALW PER 100 EQUIP	(10) ILLUSTRATION	
						(a)	(b)	(c)	(a)	(b)	(c)			(a)	(b)
						1-20	21-50	51-100	1-20	21-50	51-100			FIGURE NO.	ITEM NO.
PAHZZ	5935-108-6176	CONTINUED RC20GF104J (81349) RA20A1FD103AK (81349) RESISTOR, VARIABLE R208 P/O FREQ METER.. GROUP RA20A1FD103AK (81349)		EA	REF				*	*	*		3	7-2	R208

INDEX - FEDERAL STOCK NUMBER AND REFERENCE NUMBER
CROSS-REFERENCE TO FIGURE AND ITEM NUMBER

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5020-540-4248		Q203	5920-542-8711	7-2	
5355-668-9157		H201	5930-615-7896	7-2	S101
5355-668-9157		H202	5930-615-7896	7-2	S102
5820-699-5455		Z02	5930-669-7317	7-2	S103
5905-108-8176	7-2	R205	5935-149-4013	7-1	P101
5905-108-8176	7-2	R208	5935-192-4789	7-2	J101
5905-190-8876	7-2	R206	5935-192-4789	7-2	J102
5905-192-0390	7-2	R103	5935-260-0516		
5905-192-0390	7-2	R104	5950-346-5981	1-2	Z207
5905-192-0626	7-2	R101	5950-510-4619	7-2	F101
5905-192-0626	7-2	R102	5950-545-5512	1-2	Z203
5905-192-3973	7-2	R202	5950-571-2437	1-2	Z101
5905-192-9260	7-2	R106	5950-646-3383	1-2	Z206
5905-195-6761	7-2	R204	5950-647-9154	1-2	Z202
5905-195-6806	7-2	R207	5950-647-9509	1-2	Z205
5905-279-1875	7-2	R105	5950-447-9510	1-2	Z204
5905-279-2516	7-2	R203	5960-116-9978	7-2	V201
5905-279-2669	7-2	R201	5960-168-0873	5-2	V103
5905-279-3495	7-2	R108	5960-272-9094		F105
5905-279-3497	7-2	R109	5960-272-9182	5-2	V101
5905-537-6439	7-2	R107	5960-295-7652		F102
5910-101-4023	7-2	C104	5960-295-7652		F103
5910-101-4884	7-2	C103	5960-295-7652		E104
5910-101-5781	7-2	C120	5960-503-4880	5-2	V102
5910-101-5781	7-2	C105	5960-669-6861	5-2	V104
5910-270-5185	7-2	C101	6145-542-6125	4-1	W102
59410-523-9959	7-2	E201	6145-548-1258	4-1	W101
5910-537-4373		E202	6210-188-8779		
5910-537-5253	7-2	U201	6210-299-4099	7-2	I101
45915-517-9165			6240-355-8706		E101
5920-233-8362	1-2	F101	625-510-4682		A102
5920-235-8362	1-2	F102	6625-510-4683		I201
5920-285-0755		H'01	6625-539-8152	7-2	M201
5920-285-0755		H10			

REFERENCE NO.	MFR CODE	FIG. NO.	ITEM NO.	REFERENCE NO.	MFR CODE	FIG. NO.	ITEM NO.
A1037	98179	1-2	Z206	RC20GF753J	81349	7-2	R108
A1042	98179	1-2	Z203	RC42GF123K	81349	7-2	R101
A1044-403b9000	58923	1-2	Z101	RC42GF123K	81349	7-2	R102
A1061	98179	1-2	Z207	SA19-64DC8B	75376		H201
CM206511J	81349	7-2	C103	S619-64DC8B	75376		H202
CM308102K	81349	7-2	C104	TS102P01	81350		
CM300202J	81349		C120	TS102U02	81350		E105
CM300202J	81349	7-2	C105	TS102U03	81350		E102
CO02MGF2-18-031J	81349	4-1	W101	TS102U03	81350		E103
CP10B1EF805K	81349	7-2	C101	TS102U03	81350		E104
HJM	71400		H101	T15407149	81849	7-2	E201
HJM	71400		H102	T15407161	81849		E202
JJ089	81350	7-2	J101	T15407186	81849	1-2	Z202
JJ089	81350	7-2	J102	T15407188	81849	1-2	Z204
MDL3-1J	71400	1-2	F101	T15407189	81849	1-2	Z205
MDL3-10	71400	1-2	F102	T15407200	81849		A102
MR26W100DC1AR	81349	7-2	M201	T154M7148	81849		Q203
MS25098-22	81349	7-2	S101	T154M717	81849		Z02
MS25098-22	81349	7-2	S102	T154M7172	81849	4-1	W102
MS25098-23	81349	7-2	S103	T154M7211	81849		I201
RA20A1FD103AK	81349	7-2	R205	0A2	81349	5-2	V102
RA20A1FD103AK	81349	7-2	R208	47	24446		E101
RC20GF102J	81349	7-2	R207	483A5975	58923		
RC20GF104J	81349	7-2	R204	483C5625	58923	7-2	C201
RC20GF105K	81349	7-2	R103	6AV6	81349	5-2	V103
RC20GF105K	81349	7-2	R104	6X4W	81349	5-2	V101
RC20GF133J	81349	7-2	R201	6005-6A25W	81349	5-2	V104
RC20GF153K	81349	7-2	R206	7057	83315	7-1	P101
RC20GF154K	81349	7-2	R106	7661	96857	7-2	T101
RC20GF205J	81349	7-2	R105	81081	72619	7-2	I101
RC20GF393J	81349	7-2	R109	8108121	72619		
RC20GF471J	81349	7-2	R202	955	81349	7-2	V201
RC20GF472K	81349	7-2	R107	9758-1-2	71400		
RC20GFS14J	81349	7-2	R203				

By Order of the Secretary of the Army:

CREIGHTON W. ABRAMS
General, United States Army
Chief of Staff

Official:

VERNE L. BOWERS
Major General, United States Army
The Adjutant General

Distribution:

Active Army:

USASA (2)
CNGB (1)
ACSC-E (2)
USAARENBD(2)
USAMB (10)
AMC(1)
FORSCOM (5)
ARADCOM (2)
ARADCOM Rgn (2)
OS Maj Comd (4)
LOGCOMDS (5)
MICOM (2)
TECOM (2)
USASTRATCOM (4)
HISA (ECOM (21)
MDW (1)
Armies (2)
Corps (2)
Svc Colleges (2)
USASESS (5)
USAADS (2)
USAFAS (2)
USAARMS (2)
USAIS (2)
USAES (2)
USAINTS (3)
USACDCEC (5)

Instl (2) except
Fort Carson (10)
Fort Huachuca (10)
Fort Gordon (10)
Ft Richardson (ECOM Ofc, (2)
WSMR (2)
Army Dep (2) except
LBAD(14)
SAAD (30)
TOAD (14)
ATAD (10)
LEAD (7)
USA Dep (2)
Sig Sec USA Dep (2)
Sin Dep (5)
Sig FLDMS (1)
USAERDAA (1)
USAERDAW (1)
MAAG (1)
USARMIS (1)
WRAMC (1)
Units org under for TOE
(1 copy each unit):
11-158
29-134
B-136

USNG: None.

USAR: None.

For explanation of abbreviations used. see AR 310-50.


*U.S. GOVERNMENT PRINTING OFFICE: 1973-768109/310

END




12-25-82

DATE



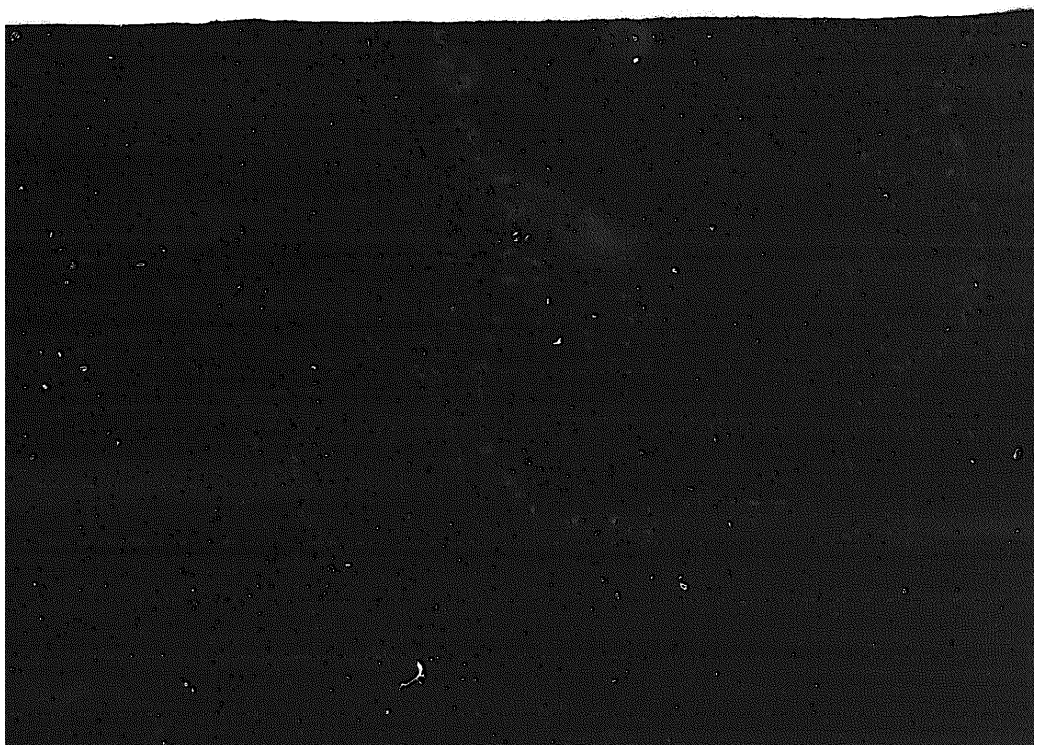

DEPARTMENT OF THE ARMY
MICROFORM
TEST TARGET

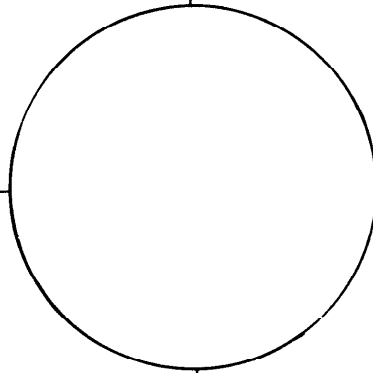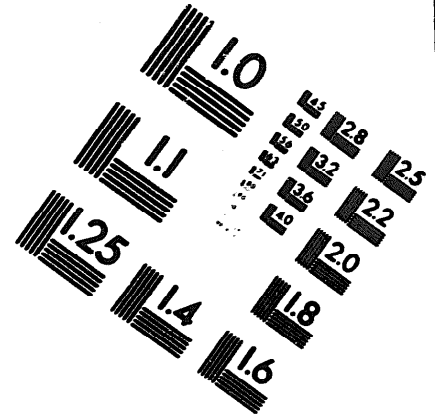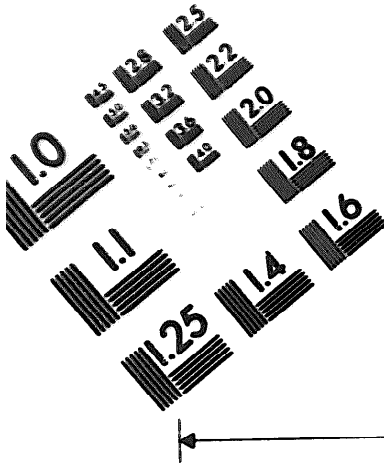

150 MM

1.0 mm (e = 81 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.5 mm (e = 1.09 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.0 mm (e = 1.37 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.5 mm (e = 1.77 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.0 mm (e = 81 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

1.5 mm (e = 1.09 mm)



ABCDEFGHIJKLMN OPQRSTUVWXYZ 1234567890
abcdefghijklmnopqrstuvwxyz \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.0 mm (e = 1.37 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

2.5 mm (e = 1.77 mm)

ABCDEFGHIJKLMN OPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 \$%& /%# 1/2 1/4 3/4 ---+ x&@*

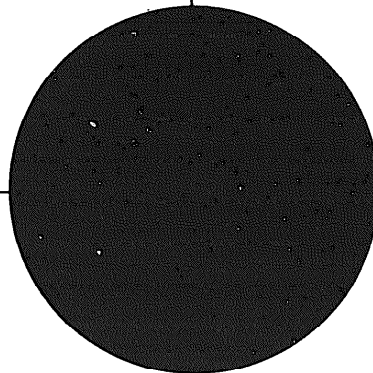

200 MM

250 MM

