

TECHNICAL MANUAL

**ORGANIZATIONAL, DIRECT SUPPORT, AND
GENERAL SUPPORT MAINTENANCE REPAIR
PARTS AND SPECIAL TOOLS LIST
(INCLUDING DEPOT MAINTENANCE REPAIR
PARTS AND SPECIAL TOOLS)
FOR
WATTMETER ME-497/U
(NSN 6625-01-064-3555)**

TECHNICAL MANUAL }
 No. 11-6625-3018-24P }

HEADQUARTERS
 DEPARTMENT OF THE ARMY
 WASHINGTON, DC 28 March 1983

**ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT
 MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST
 (INCLUDING DEPOT MAINTENANCE REPAIR PARTS
 AND SPECIAL TOOLS)
 FOR
 WATTMETER ME-497/U
 (NSN 6625-01-064-3555)**

Current as of 15 October 1982

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS
 You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: DRSEL-ME-MP, Fort Monmouth, NJ 07703.
 In either case, a reply will be furnished direct to you.

Table of Contents

		Page	Illus Figure
SECTION	I. Introduction	1	
	II. Repair Parts List	5	
GROUP	00 Wattmeter ME-497/U	5	1
	01 Meter Housing	7	2
	0101 Switch Assembly	9	3
	02 Radiator Assembly	11	4
	02 Radiator Pre-Assembly	13	5
	03 Block Assembly, Voltmeter (See Group 00 for parts)		
SECTION	III. Special Tools List (Nonapplicable)		
	IV. National Stock Number and Part Number Index	14	

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support, and general support maintenance of the ME-497/U. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphameric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code

Definition

PA—Item procured and stocked for anticipated or known usage.

XA—Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.

XB—Item is not procured or stocked. If not available through salvage, requisition.

XD—A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code

Application/Explanation

H—Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code

Application/Explanation

H—The lowest maintenance level capable of complete repair of the support item is the general support level.

Z—Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes

are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability
codes

Definition

Z—Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.

H—Reparable item. When uneconomically reparable, condemn and dispose at the general support level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-41/42 which is used to identify the manufacturer, distributor, or Government agency, etc.

e. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned the repair part received may have a different part number than the part being replaced.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc).

4. Special Information

a. The following publication pertains to the ME-497/U and its components:

TM 11-6625-3018-14, -Wattmeter ME-497/U

b. National stock numbers (NSN'S) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: DRSEL-MM, Fort Monmouth, NJ 07703 for the part required to support your equipment.

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.


b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

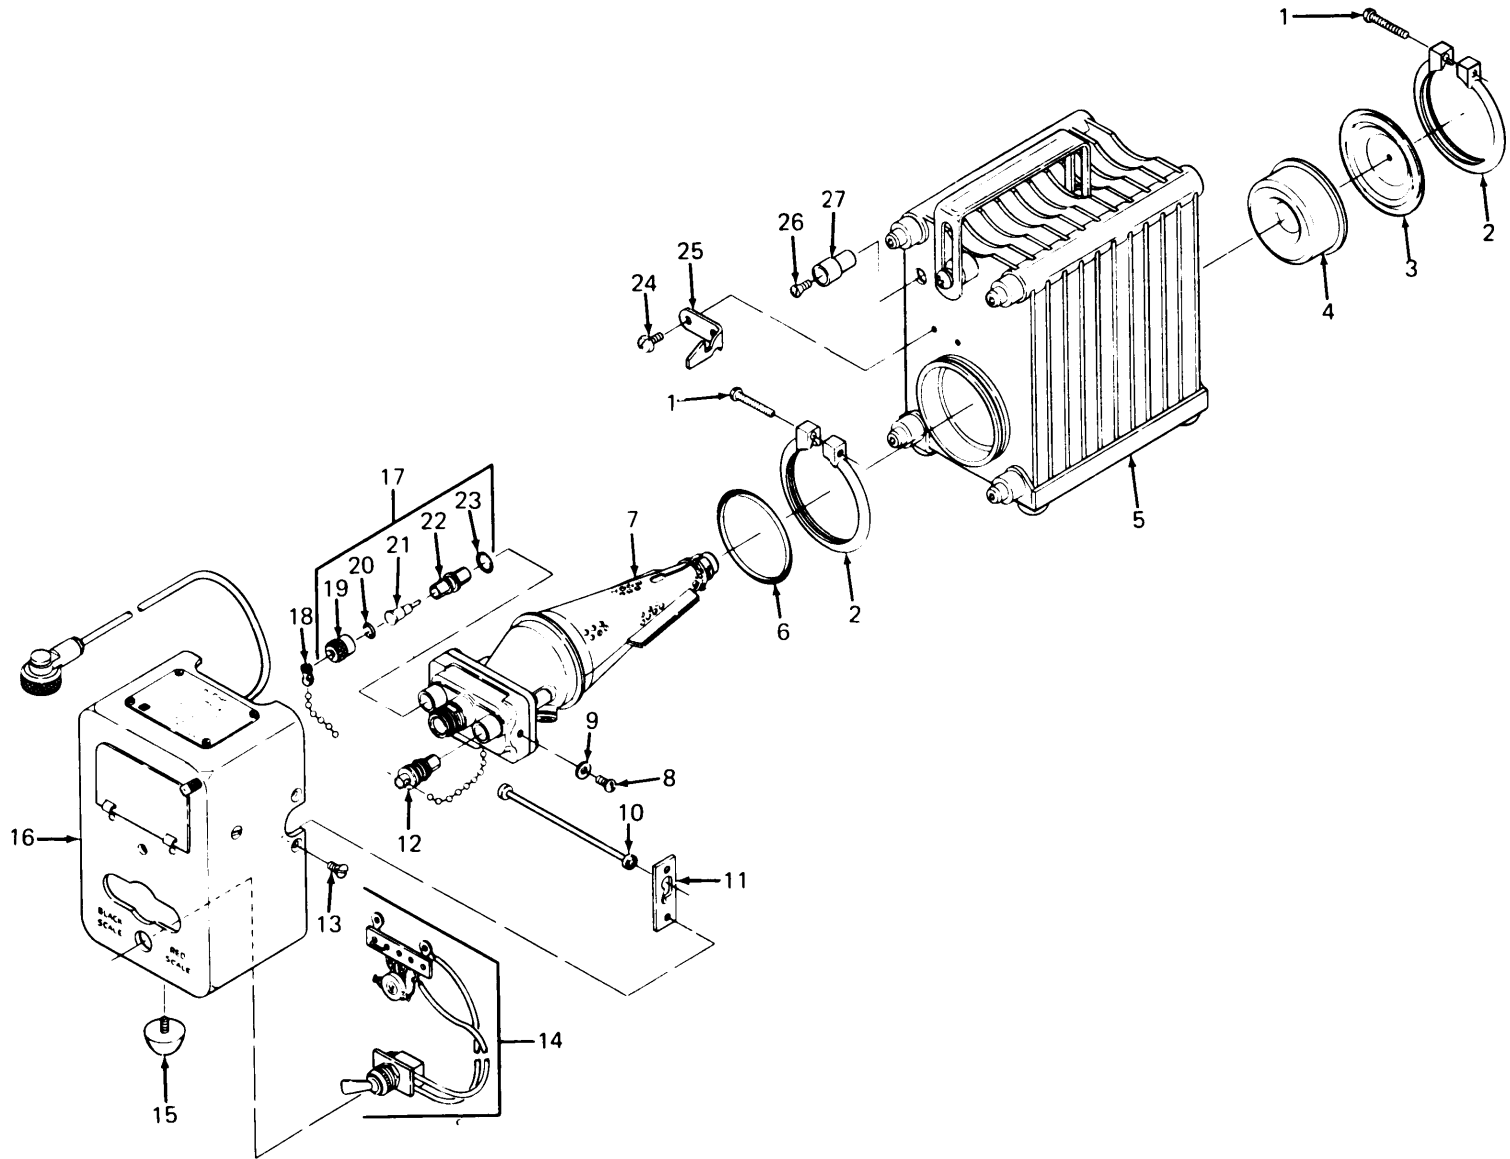


EL8AQ001

Figure 1. Wattmeter ME-497/U.

SECTION II

TM 11-6625-3018-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	USABLE ON CODE	U-M	QTY INC IN UNIT
						GROUP UJ WATIMETER ME-497/U		
1	1	XDHZZ		70998	1118-1501-00	SCREW MACH RND HD.....	EA	4
1	2	PAHZZ	5340-01-108-2911	70998	7500-047	CLAMP, LOOP.....	EA	4
1	3	PAHZZ	6625-00-401-5366	70998	2400-050	CAP, DIAPHRAGM RETAL.....	EA	1
1	4	PAHZZ	6625-00-401-5365	70998	2400-015	DIAPHRAGM, TEST SET.....	EA	4
1	5	PAHHH	6625-01-122-4509	70998	2400-058	RADIATOR ASSEMBLY.....	EA	1
1	6	XBHZZ		96169	2V999P2B1000PC4	PACKING PREFORMED.....	EA	4
1	7	PAHHH	6625-01-122-4508	70998	6104-002	BLOCK ASSEMBLY VOL.....	EA	1
1	8	PAHZZ	5305-00-193-1118	70998	1120-0301-12	SCREW, MACHINE.....	EA	4
1	9	PAHZZ	5330-00-350-9694	70998	7500-153	GASKET.....	EA	4
1	10	PAHZZ	6625-00-401-5368	70998	7500-029	LATCH ASSEMBLY, TEST.....	EA	1
1	11	PAHZZ	6625-00-401-5369	70998	7500-032	PLATE, LATCH ASSEMBL.....	EA	4
1	12	PAHZZ	5985-00-762-8502	70998	7500-223	MIXER, CRYSTAL, COAXI.....	EA	1
1	13	XBHZZ		70998	5-092	SCR MACH UNDERCUT.....	EA	4
1	14	PAHHH	5930-01-122-4588	70998	6154-012	SWITCH ASSEMBLY.....	EA	1
1	15	PAHZZ	5340-00-431-1114	70485	513A	BUMPER, RUBBER.....	EA	1
1	16	XAMHH		70998	6104-003	HOUSING METER ASSY.....	EA	1
1	17	PAHZZ	5961-00-961-7819	70998	7500-147	SEMICONDUCTOR DEVIC.....	EA	2
1	18	XAHZZ		70998	7500-152	END RING, BEAD CHAIN.....	EA	1
1	19	XAHZZ		70998	7500-145	CAP, ELECTRICAL.....	EA	4
1	20	XAHZZ		02690	568-011	PACKING PREFORMED.....	EA	2
1	21	XAHZZ		70998	7500-180	SEMICONDUCTOR DEVI.....	EA	4
1	22	XAHZZ		70998	7500-144	HOLDER, CRYSTAL UNIT.....	EA	2
1	23	XAHZZ		81168	11-009	PACKING PREFORMED.....	EA	2
1	24	XRHZZ		70998	1120-0504-00	SCREW MACH BDR HD.....	EA	4
1	25	PAHZZ	6625-00-401-5371	70998	7500-046	HOLDER, CASE, METER.....	EA	1
1	26	XRHZZ		70998	1116-0505-00	SCREW MACHINE FLH.....	EA	1
1	27	PAHZZ	5935-00-479-6465	70998	8180-036	SOCKET, ELECTRICAL.....	EA	1

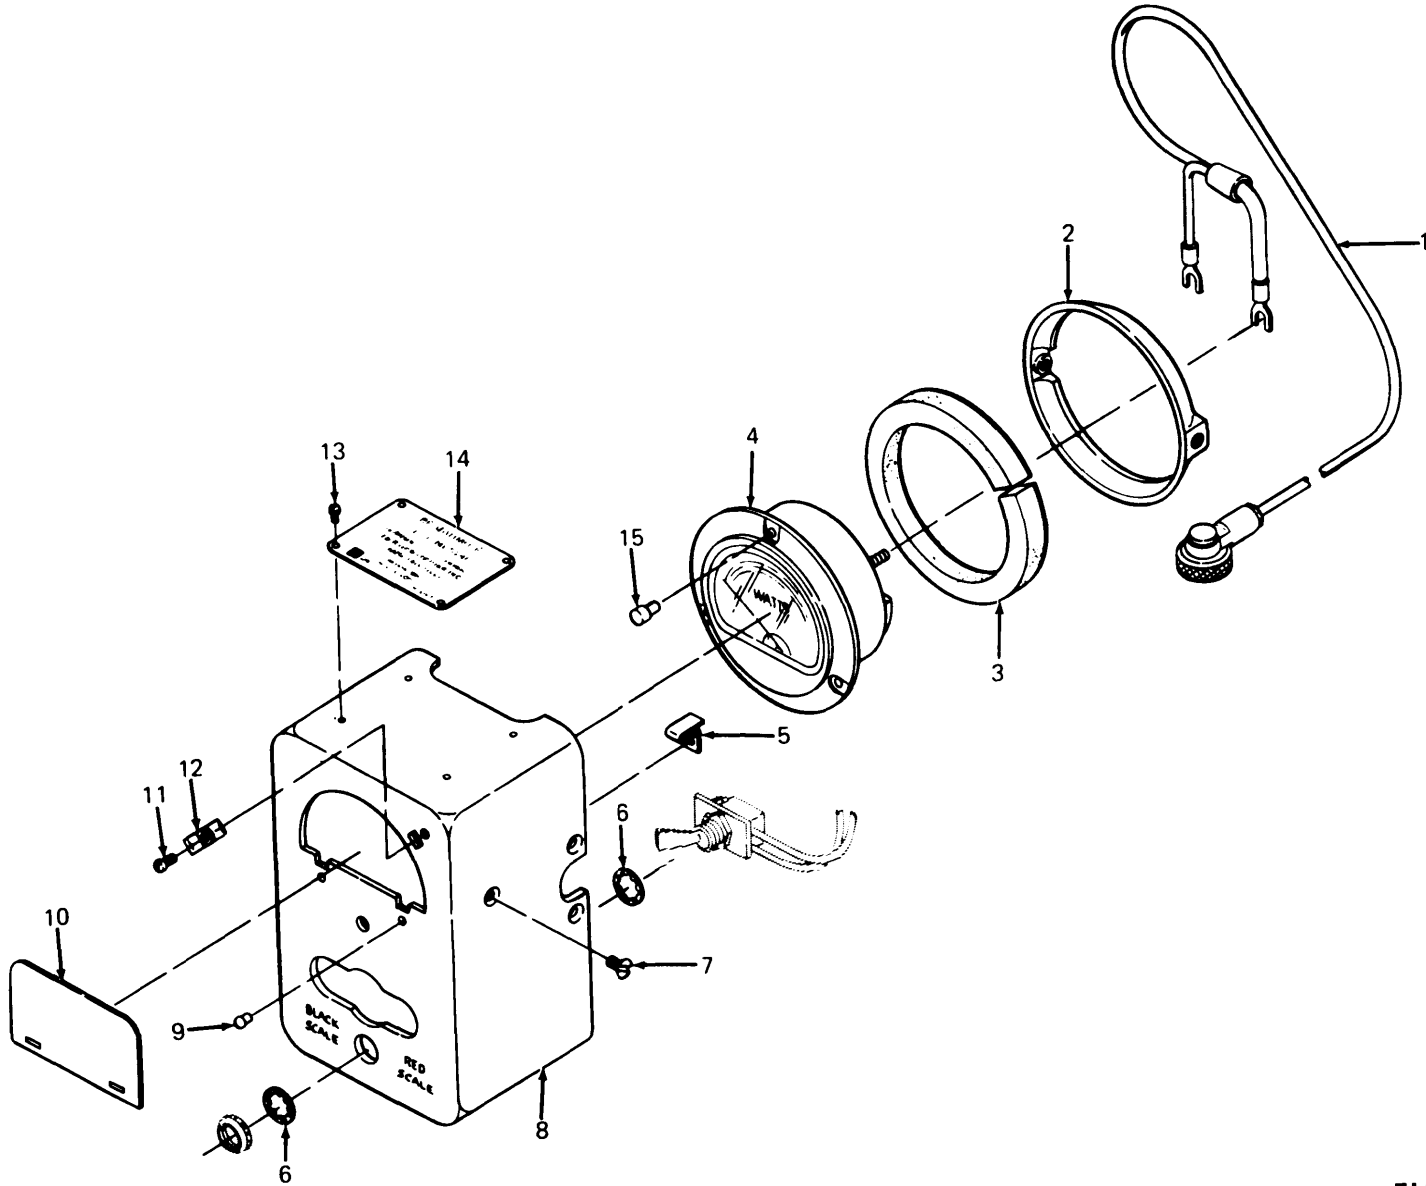


EL8AQ002

Figure 2. Meter housing.

SECTION 11

TM 11-6625-3018-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
						GROUP 01 METER HOUSING		
2	1	PAHZZ	5995-00-932-0443	70998	4220-097-2	CABLE ASSEMBLY, SPEC.....	EA	1
2	2	PAHZZ	6625-00-531-4273	70998	4220-087	SHOCK MOUNT ASSEMBL.....	EA	1
2	3	XBHZZ		70998	5-1066	STRIP SHOCK.....	EA	1
2	4	PAHZZ	6625-01-108-6611	70998	2080-034	WATTMETER.....	EA	1
2	5	XBHZZ		70998	7500-037	HINGE.....	EA	2
2	6	XBHZZ		70998	5-1319	LK WASH IT 15/32 SST.....	EA	2
2	7	XBHZZ		70998	1120-0505-00	SCR MACH FLM.....	EA	4
2	8	XBHZZ		70998	6154-004	HOUSING METER.....	EA	1
2	9	XBHZZ		70998	5-256-2	RIVET.....	EA	2
2	10	XBHZZ		70998	6154-011	COVER METER.....	EA	1
2	11	XBHZZ		70998	1112-0100-00	SCR MACH PHD SST.....	EA	1
2	12	PAHZZ	5340-00-411-9214	70998	7500-038	CLIP, SPRING TENSION.....	EA	1
2	13	XBHZZ		70998	5-1320	SCR MACH PHD NO 2 B.....	EA	4
2	14	XBHZZ		70998	6104-004	PLATE IDENT.....	EA	1
2	15	PAHZZ	5340-00-255-0273	70998	4220-098	BUMPER, RUBBER.....	EA	3

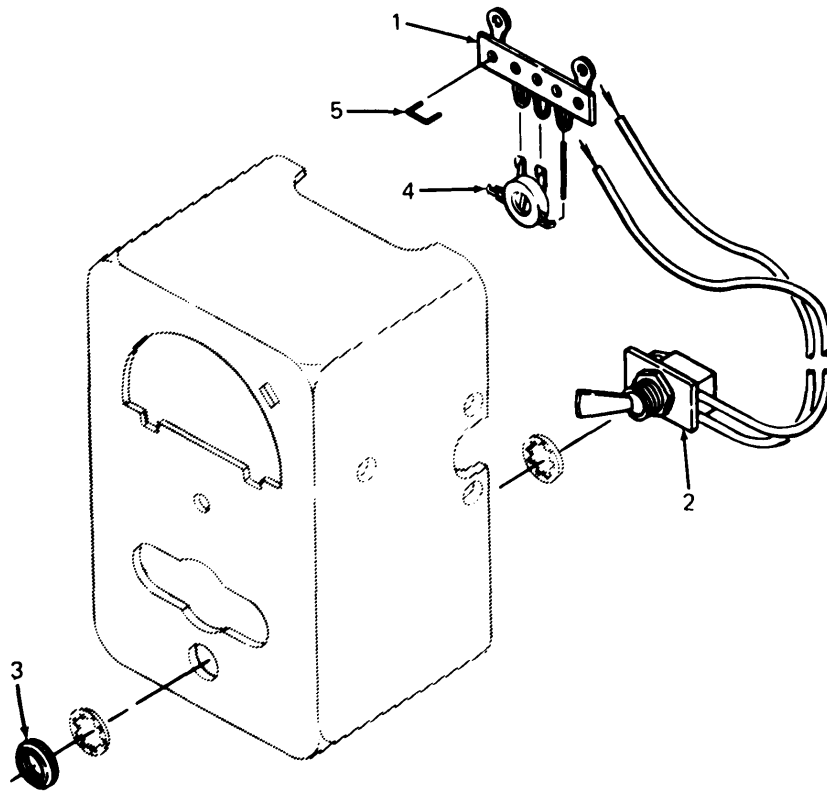


EL8AQ005

Figure 3. Switch Assembly

SECTION II

TM 11-6625-3018-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
						GROUP UIOI SWITCH ASSEMBLY		
3	1	XBHZZ		70998	6154-015	TERMINAL STRIP ELEC.....	EA	1
3	2	PAHZZ	5930-00-542-9436	27193	329UK27C	SWITCH, TOGGLE.....	EA	1
3	3	PAHZZ	5310-01-006-5022	27193	15-1049-3	NUT, PLAIN, RCUND.....	EA	1
3	4	XBHZZ		14514	298	WIRE COPPER TINNED.....	EA	1
3	5	PAHZZ	5905-01-107-6579	54869	P115L02.5K	RESISTOR, VARIABLE, N.....	EA	1

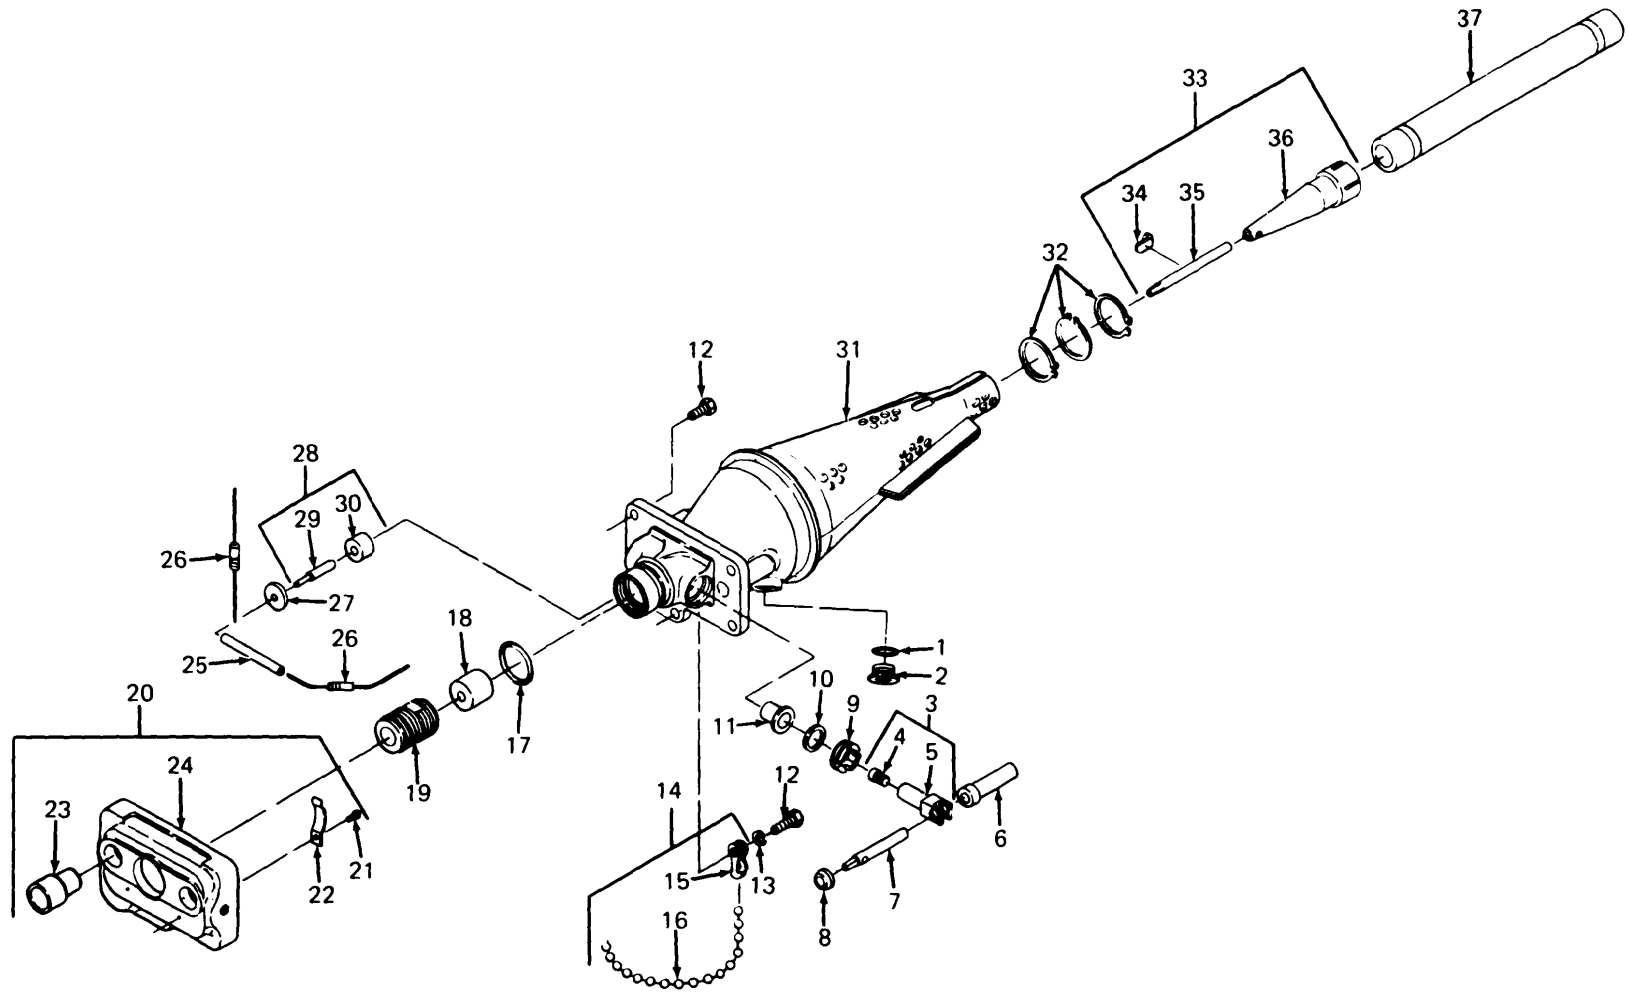


EL8AQ003

Figure 4. Radiator Assembly.

SECTION II

TM 11-6625-3018-24P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) FSCM	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO	(b) ITEM NO							
GROUP 02 RADIATOR ASSEMBLY								
4	1	PAHZZ	5330-00-297-6308	81168	11-012	PACKING, PREFORMED.....	EA	1
4	2	PAHZZ	5365-00-194-5570	70998	7500-040	PLUG, MACHINE THREAD.....	EA	1
4	3	XBHZZ		70998	7500-271	SLV AND PKGBE ASSY.....	EA	2
4	4	XBHZZ		70998	7500-115	PROBE LOW RANGE.....	EA	1
4	5	XBHZZ		70998	7500-112	SLEEVE HIGH RANGE.....	EA	1
4	6	XBHZZ		70998	7500-111	SPACER SLEEVE.....	EA	2
4	7	XBHZZ		70998	7500-113	STUB LOW RANGE.....	EA	2
4	8	XBHZZ		70998	7500-110	SPACER RING.....	EA	2
4	9	XBHZZ		70998	7500-119	SCREW SEAL PROBE.....	EA	2
4	10	XBHZZ		70998	8180-013	WASHER SEAL PROBE.....	EA	2
4	11	PAHZZ	6625-01-107-5439	70998	7500-126	COVER, TEST PRD.....	EA	2
4	12	XBHZZ		70998	1118-0607-00	SCREW MACH HEX HD.....	EA	4
4	13	XBHZZ		70998	5-1318	LKWASH NU 8 SST.....	EA	1
4	14	XBHZZ		70998	6700-021	CH AND FSTR ASSY.....	EA	1
4	15	PAHZZ	4030-00-585-2110	70998	7500-152	END RING, BEAD CHAIN.....	EA	1
4	16	XBHZZ		70998	7500-108	CHAIN HOLDER.....	EA	1
4	17	XBHZZ		96169	54-66-2114	PACKING, PREFORMED.....	EA	1
4	18	XAHZZ		70998	7500-139	INSULATOR CONNECTOR.....	EA	1
4	19	XAHZZ		70998	7500-138	CUNN BODY RCPT ELEC.....	EA	1
4	20	XBHZZ		70998	7500-141	COVER VM ASSY.....	EA	1
4	21	XBHZZ		70998	5-1321	SCR DR NU 00 1/8 IN.....	EA	4
4	22	XAHZZ		70998	7500-143	CONTACT SPRING.....	EA	2
4	23	XAHZZ		70998	7500-104	SOCKET CRYSTAL.....	EA	2
4	24	XAHZZ		70998	7500-101	CASE CRYSTAL VM.....	EA	1
4	25	XBHZZ		70998	5-028-1	INSUL SLVG ELEC.....	EA	1
4	26	PAHZZ		70998	5-097-2	RESISTOR FIXED CUM.....	EA	2
4	27	PAHZZ	5910-01-107-4633	70998	7500-116	CAPACITOR, FIXED, MIC.....	EA	1
4	28	XAHZZ		70998	7500-232	CONTACT ASSY ELEC.....	EA	1
4	29	XAHZZ		70998	7500-121	CONTACT ELECTRICAL.....	EA	1
4	30	PAHZZ	5970-01-106-8242	70998	7500-123	INSULATOR, BUSHING.....	EA	2
4	31	XBHZZ		70998	7500-216	CASE VM AND RES.....	EA	1
4	32	PAHZZ	5365-00-298-6563	79136	5100-62	RING, RETAINING.....	EA	3
4	33	XBHZZ		70998	7500-257	FITTING ASSY RES.....	EA	1
4	34	XAHZZ		70998	7500-128	PLATE CAPACITOR.....	EA	1
4	35	XAHZZ		70998	7500-130	SLEEVE CONTACT.....	EA	1
4	36	XAHZZ		70998	7500-256	FITTING RESISTOR.....	EA	1
4	37	PAHZZ	5905-01-107-8715	70998	8130-008-1	RESISTOR, FIXED, FILM.....	EA	1

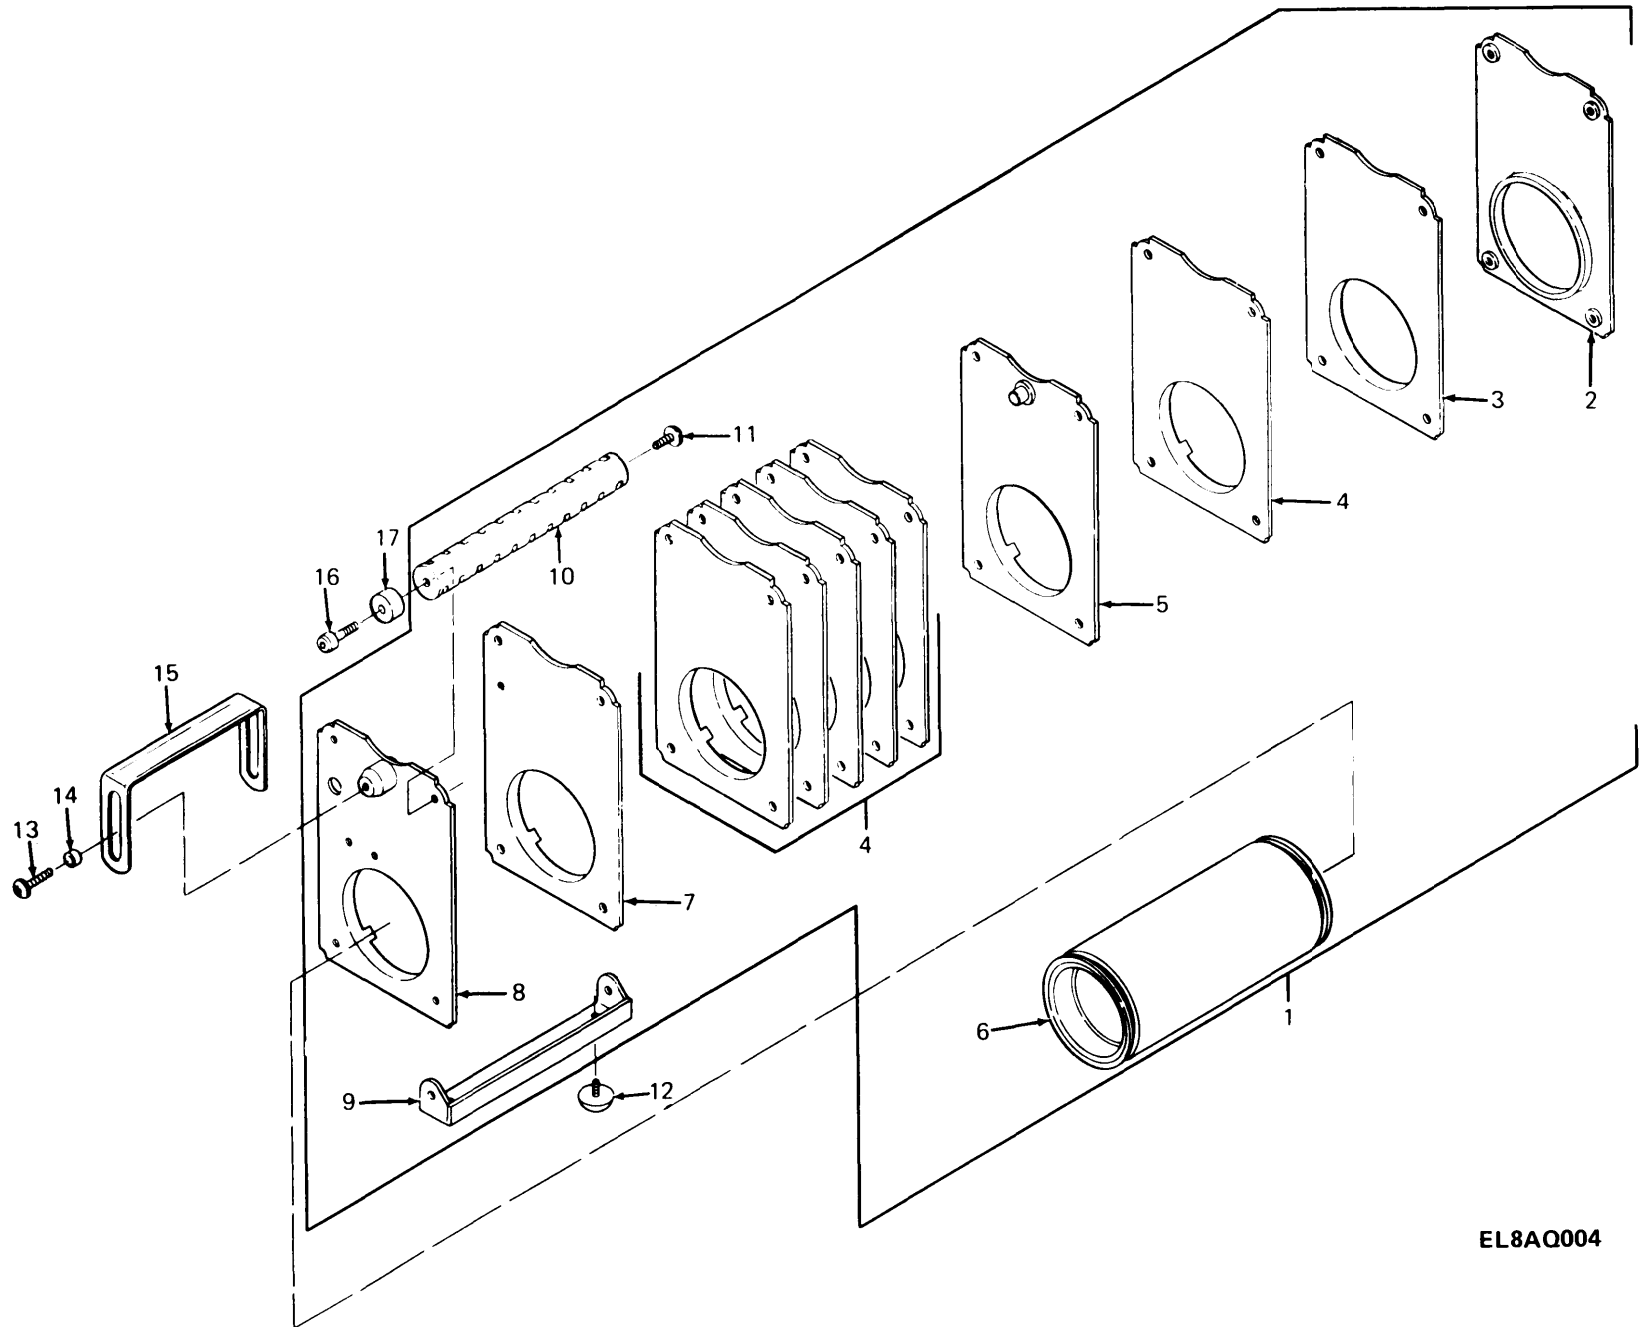

EL8AQ004

Figure 5. Radiator Pre-assembly.

SECTION II

TM 11-6625-3018-24P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO	(B) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	FSCM	PART NUMBER	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
RADIATOR PRE-ASSEMBLY								
5	1	XAHZZ		70998	2400-001	RADIATOR PRE-ASSY.....	EA	1
5	2	XAHZZ		70998	2400-008	FIN END.....	EA	1
5	3	XAHZZ		70998	2400-007	FIN NO 10.....	EA	1
5	4	XAHZZ		70998	2400-005	FIN RADIATING.....	EA	6
5	5	XAHZZ		70998	2400-006	FIN NO 8.....	EA	1
5	6	XAHZZ		70998	2400-002	CYLINDER.....	EA	1
5	7	XAHZZ		70998	2400-004	FIN NO 2.....	EA	1
5	8	XAHZZ		70998	2400-003	FIN FRONT.....	EA	1
5	9	XAHZZ		70998	2400-009	RAIL CORNER.....	EA	2
5	10	XAHZZ		70998	2400-010	RIB SPACING.....	EA	2
5	11	XAHZZ		70998	1120-0506-00	SCR MACH PH TRH.....	EA	8
5	12	PAHZZ	5330-01-074-0265	70485	225	PACKING, PREFORMED.....	EA	4
5	13	XBHZZ		70998	1120-1206-00	SCR MACH PH TRH.....	EA	1
5	14	XBHZZ		70998	2400-069	SPACER SUPPORT.....	EA	1
5	15	PAHZZ	5340-00-224-1565	70998	2400-017	HANDLE, BAIL.....	EA	1
5	16	PAHZZ	5305-00-224-1311	70998	7500-071	SCREW, CAP, SOCKET HE.....	EA	4
5	17	PAHZZ	5365-00-224-9379	70998	7500-070	SPACER, SLEEVE.....	EA	4

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5305-00-193-1118	1	8	5930-00-542-9436	3	2
5365-00-194-5570	4	2	4030-00-585-2110	4	15
5305-00-224-1311	5	16	5985-00-762-8502	1	12
5340-00-224-1565	5	15	5995-00-932-0443	2	1
5365-00-224-9379	5	17	5961-00-961-7819	1	17
5340-00-255-0273	2	15	5310-01-006-5022	3	3
5330-00-297-6308	4	1	5330-01-074-0265	5	12
5365-00-298-6563	4	32	5970-01-106-8242	4	30
5330-00-350-9694	1	9	5910-01-107-4633	4	27
6625-00-401-5365	1	4	6625-01-107-5439	4	11
6625-00-401-5366	1	3	5905-01-107-6579	3	5
6625-00-401-5368	1	10	5905-01-107-8715	4	37
6625-00-401-5369	1	11	5340-01-108-2911	1	2
6625-00-401-5371	1	25	6625-01-108-6611	2	4
5340-00-411-9214	2	12	6625-01-122-4508	1	7
5340-00-431-1114	1	15	6625-01-122-4509	1	5
5935-00-479-6465	1	27	5930-01-122-4588	1	14
6625-00-531-4273	2	2			

FSCM	PART NUMBER	FIGURE NO.	ITEM NO.	FSCM	PART NUMBER	FIGURE NO.	ITEM NO.
54869	PT15LD2.5K	3	5	70998	6154-004	2	8
81168	11-009	1	23	70998	6154-011	2	10
81168	11-012	4	1	70998	6154-012	1	14
70998	1112-0100-00	2	11	70998	6154-015	3	1
70998	1116-0505-00	1	26	70998	6700-021	4	14
70998	1118-0607-00	4	12	70998	7500-029	1	10
70998	1118-1501-00	1	1	70998	7500-032	1	11
70998	1120-0301-12	1	8	70998	7500-037	2	5
70998	1120-0504-00	1	24	70998	7500-038	2	12
70998	1120-0505-00	2	7	70998	7500-040	4	2
70998	1120-0506-00	5	11	70998	7500-046	1	25
70998	1120-1206-00	5	13	70998	7500-047	1	2
27193	15-1049-3	3	3	70998	7500-070	5	17
96169	2V999P281000PC4	1	6	70998	7500-071	5	16
70998	2080-034	2	4	70998	7500-101	4	24
70485	225	5	12	70998	7500-104	4	23
70998	2400-001	5	1	70998	7500-108	4	16
70998	2400-002	5	6	70998	7500-110	4	8
70998	2400-003	5	8	70998	7500-111	4	6
70998	2400-004	5	7	70998	7500-112	4	5
70998	2400-005	5	4	70998	7500-113	4	7
70998	2400-006	5	5	70998	7500-115	4	4
70998	2400-007	5	3	70998	7500-116	4	27
70998	2400-008	5	2	70998	7500-119	4	9
70998	2400-009	5	9	70998	7500-121	4	29
70998	2400-010	5	10	70998	7500-123	4	30
70998	2400-015	1	4	70998	7500-126	4	11
70998	2400-017	5	15	70998	7500-128	4	34
70998	2400-050	1	3	70998	7500-130	4	35
70998	2400-058	1	5	70998	7500-138	4	19
70998	2400-069	5	14	70998	7500-139	4	18
14514	298	3	4	70998	7500-141	4	20
70998	4220-087	2	2	70998	7500-143	4	22
70998	4220-097-2	2	1	70998	7500-144	1	22
70998	4220-098	2	15	70998	7500-145	1	19
70998	5-028-1	4	25	70998	7500-147	1	17
70998	5-092	1	13	70998	7500-152	1	18
70998	5-097-2	4	26	70998	7500-152	4	15
70998	5-1066	2	3	70998	7500-153	1	9
70998	5-1318	4	13	70998	7500-180	1	21
70998	5-1319	2	6	70998	7500-216	4	31
70998	5-1320	2	13	70998	7500-223	1	12
70998	5-1321	4	21	70998	7500-232	4	28
70998	5-256-2	2	9	70998	7500-256	4	36
79136	5100-62	4	32	70998	7500-257	4	33
70485	513A	1	15	70998	7500-271	4	3
96169	54-66-2114	4	17	70998	8130-008-1	4	37
02690	568-011	1	20	70998	8180-013	4	10
70998	6104-002	1	7	70998	8180-036	1	27
70998	6104-003	1	16	27193	8290K27C	3	2
70998	6104-004	2	14				

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS PUBLICATION?

FROM (PRINT YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE SENT

10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

PUBLICATION DATE

23 Jan 78

PUBLICATION TITLE

Radar Set AN/PRC-76

BE EXACT... PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER

SSG I. M. DeSpirit of 999-1776

SIGN HERE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-3018-24P

PUBLICATION DATE

28 MAR 1983

PUBLICATION TITLE

Wattmeter ME-497/U

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.

PARA-GRAPH

FIGURE NO.

TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 2028-2
1 JUL 79

PREVIOUS EDITIONS ARE OBSOLETE

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: DRSEL-ME-MP
Fort Monmouth, New Jersey 07703

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-3018-24P

PUBLICATION DATE

28 MAR 1983

PUBLICATION TITLE

Wattmeter ME-497/U

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.

PARA-GRAPH

FIGURE NO.

TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: DRSEL-ME-MP
Fort Monmouth, New Jersey 07703

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-6625-3018-24P

PUBLICATION DATE

28 MAR 1983

PUBLICATION TITLE

Wattmeter ME-497/U

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.

PARA-GRAPH

FIGURE NO.

TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: DRSEL-ME-MP
Fort Monmouth, New Jersey 07703

By Order of the Secretary of the Army:

E. C. MEYER
General, United States Army
Chief of Staff

Official:
Robert M. Joyce
Major General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with Special Mailing List.

