

*TB 9-6680-284-24

DEPARTMENT OF THE ARMY TECHNICAL BULLETIN

CALIBRATION PROCEDURE FOR STROBOSCOPES, GENERAL RADIO, MODELS 1531-A AND 1531-AB

Headquarters Department of the Army, Washington, DC
11 June 2008

Distribution Statement A: Approved for public release; distribution is unlimited.

REPORTING OF ERRORS AND RECOMMENDING IMPROVEMENTS

You can improve this manual. If you find any mistakes or if you know of a way to improve these procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) directly to: Commander, U.S. Army Aviation and Missile Command, ATTN: AMSAM-MMC-MA-NP, Redstone Arsenal, AL 35898-5000. A reply will be furnished to you. You may also send in your comments electronically to our E-mail address: 2028@redstone.army.mil or by fax 256-842-6546/DSN 788-6546. For the World Wide Web use: <https://amcom2028.redstone.army.mil>. Instructions for sending an electronic 2028 can be found at the back of this manual.

SECTION		Paragraph	Page
	I. IDENTIFICATION AND DESCRIPTION		
	Test instrument identification	1	2
	Forms, records, and reports	2	2
	Calibration description	3	2
	II. EQUIPMENT REQUIREMENTS		
	Equipment required	4	2
	Accessories required	5	2
	III. CALIBRATION PROCESS		
	Preliminary instructions	6	3
	Equipment setup	7	3
	Frequency	8	4
	Final procedure	9	6

*This bulletin supersedes TB 9-6680-284-35, dated 7 July 2004.

**SECTION I
IDENTIFICATION AND DESCRIPTION**

1. Test Instrument Identification. This bulletin provides instructions for the calibration of Stroboscope, General Radio, Models 1531-A and 1531-AB. The manufacturer's manual and TM 9-6625-2465-15 were used as the prime data sources in compiling these instructions. The equipment being calibrated will be referred to as the TI (test instrument) throughout this bulletin.

a. Model Variations. Variations among models are described in text.

b. Time and Technique. The time required for this calibration is approximately 1 hour, using the dc and low frequency technique.

2. Forms, Records, and Reports

a. Forms, records, and reports required for calibration personnel at all levels are prescribed by TB 750-25.

b. Adjustments to be reported are designated (R) at the end of the sentence in which they appear. When adjustments are in tables the (R) follows the designated adjustment. Report only those adjustments made and designated with (R).

3. Calibration Description. TI parameters and performance specifications which pertain to this calibration are listed in table 1.

Table 1. Calibration Description

Test instrument parameters	Performance specifications
Frequency	Range: 110 to 25,000 flashes per minute (fpm) Accuracy: ±1% of reading

**SECTION II
EQUIPMENT REQUIREMENTS**

4. Equipment Required. Table 2 identifies the specific equipment to be used in this calibration procedure. This equipment is issued with Secondary Transfer Calibration Standards Set AN/GSM-286, AN/GSM-287 and AN/GSM-705. Alternate items may be used by the calibrating activity. The items selected must be verified to perform satisfactorily prior to use and must bear evidence of current calibration. The equipment must meet or exceed the minimum use specifications listed in table 2. The accuracies listed in table 2 provide a four-to-one ratio between the standard and TI. Where the four-to-one ratio cannot be met, the actual accuracy of the equipment selected is shown in parenthesis.

5. Accessories Required. The accessories required for this calibration are common usage accessories, issued as indicated in paragraph 4 above, and are not listed in this calibration procedure. The following peculiar accessory is also required for this calibration: Motional Pickup Transducer (consisting of photo pickup, power supply, and magnetic holder), P/N 7913463 (6695-00-302-6923).

Table 2. Minimum Specifications of Equipment Required

Common name	Minimum use specifications	Manufacturer and model (part number)
AUTOTRANSFORMER	Range: 105 to 125 V ac Accuracy: $\pm 1\%$	Ridge, Model 9020A (9020A)
FREQUENCY COUNTER	Range: 2.3 to 551 ms period Accuracy: 0.25% (period)	Fluke, Model PM6681/656 (PM6681/656)

SECTION III CALIBRATION PROCESS

6. Preliminary Instructions

a. The instructions outlined in paragraphs 6 and 7 are preparatory to the calibration process. Personnel should become familiar with the entire bulletin before beginning the calibration.

b. Items of equipment used in this procedure are referenced within the text by common name as listed in table 2.

c. Unless otherwise specified, verify the result of each test and, whenever the test requirement is not met, take corrective action before continuing with the calibration. Adjustments required to calibrate the TI are included in this procedure. Additional maintenance information is contained in the manufacturer's manual for this TI.

d. Unless otherwise specified, all controls and control settings refer to the TI.

7. Equipment Setup

WARNING

HIGH VOLTAGE is used or exposed during the performance of this calibration. DEATH ON CONTACT may result if personnel fail to observe safety precautions. REDUCE OUTPUT(S) to minimum after each step within the performance check where applicable.

a. Connect autotransformer to 115 V ac source and adjust for 115 V ac output.

b. Connect TI to autotransformer.

c. Set TI **POWER** switch to **ON** and allow 15 minutes for equipment to warm-up and stabilize.

d. Set range function control to 670-4170 and adjust **RPM** control to **3600**.

e. Adjust **HIGH CAL** trimmer (screwdriver control on front panel below and to left of RPM control) until **CAL** indicator is either on or off (stops blinking).

f. Adjust **RPM** control to **900**.

g. Adjust **LOW CAL** trimmer (screwdriver control on front panel below and to right of RPM control) until **CAL** indicator is either on or off (stops blinking).

h. Repeat **d** through **g** above until **CAL** indicator stops blinking with **RPM** control set to **900** and **3600**.

8. Frequency

a. Performance Check

- (1) Connect motional transducer to frequency counter.
- (2) Connect motional transducer to 115 V ac source and press pushbutton **POWER**.
- (3) Set range function control to **4000-25000** and adjust **RPM** control to **25000**.
- (4) Direct light from TI strobotron into motional pickup. If frequency counter does not indicate between 2.376 and 2.424 ms, perform **b** below.
- (5) Vary autotransformer from 105 to 125 V ac. Indication on frequency counter will remain within the limits stated in (4) above. Set autotransformer to 115 V ac.
- (6) Repeat technique of (3) and (4) above for control settings listed in table 3. If frequency counter does not indicate within the limits specified, perform **b** below.

Table 3. Frequency Accuracy

Test instrument		Frequency counter indications	
RANGE FUNCTION control	RPM control	Min	Max
4000-25000	15000	3.960 ms	4.040 ms
4000-25000	4000	14.851 ms	15.151 ms
670-4170	4170	14.246 ms	14.533 ms
670-4170	2000	29.702 ms	30.303 ms
670-4170	670	88.665 ms	90.456 ms
110-690	690	86.095 ms	87.834 ms
110-690	400	148.514 ms	151.515 ms
110-690	110	540.054 ms	550.964 ms

b. Adjustments

WARNING

Before removing TI from its case, turn **POWER** switch to **OFF** and disconnect TI from the ac power source (autotransformer). Then rotate the **RPM RANGE** switch at least one position in either direction, to discharge the capacitor to prevent contact with 800 volts.

NOTE

For access to R7 and R8 (potentiometers located on each side of **RANGE** switch), the TI must be removed from the case. Remove the four screws from the side of the case opposite the panel and pull TI out of case. After removing TI from case, connect to power source, turn **POWER** switch to **ON** and allow TI to warm-up for at least one hour.

- (1) Set range function control to **4000-25000**.
- (2) Adjust **RPM** control to **21600**.
- (3) Adjust **HIGH CAL** trimmer (screwdriver control on front panel) for 2.78 ms indication on frequency counter.
- (4) Adjust **RPM** control to **5400**.
- (5) Adjust **LOW CAL** trimmer (screwdriver control on front panel) for 11.11 ms indication on frequency counter.
- (6) Repeat (2) through (5) above to compensate for interaction of adjustments.
- (7) Set range function control to **670-4170** and adjust **RPM** control to **3600**.
- (8) Adjust R7 (fig. 1) for 16.66 ms indication on frequency counter (R).
- (9) Adjust **RPM** control to **900**. If frequency counter does not indicate between 66.00 and 67.340, repeat (1) through (8) above.
- (10) Set range function control to **110-690** and adjust **RPM** control to **600**.
- (11) Adjust R8 (fig. 1) for 100.0 ms indication on frequency counter (R).
- (12) Adjust **RPM** control to **150**. If frequency counter does not indicate between 396.03 and 404 ms, repeat (1) through (6), (10), and (11) above.
- (13) Repeat **a** above.

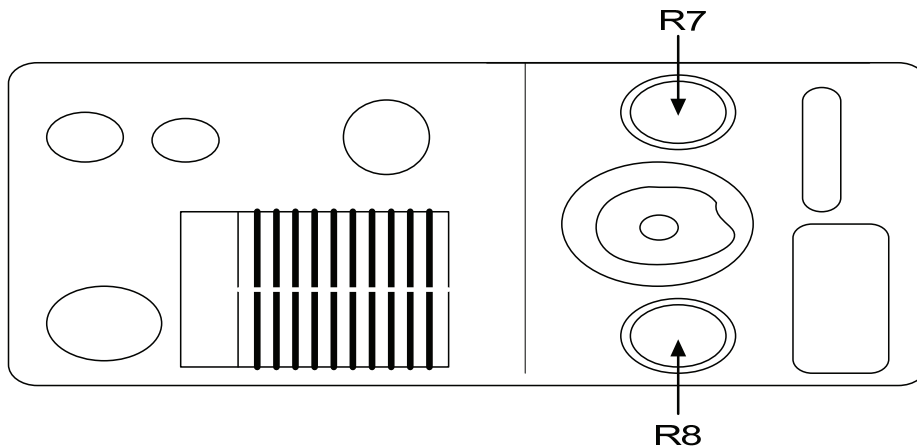


Figure 1. Frequency adjustment locations.

9. Final Procedure

- a.** Deenergize and disconnect all equipment.
- b.** Annotate and affix DA label/form in accordance with TB 750-25.

By Order of the Secretary of the Army:

Official:



JOYCE E. MORROW
*Administrative Assistant to the
Secretary of the Army*

0810110

GEORGE W. CASEY, JR.
*General, United States Army
Chief of Staff*

Distribution:

To be distributed in accordance with the initial distribution number (IDN) 343098, requirements for calibration procedure TB 9-6680-284-24.

Instructions for Submitting an Electronic 2028

The following format must be used if submitting an electronic 2028. The subject line must be exactly the same and all fields must be included; however, only the following fields are mandatory: 1, 3, 4, 5, 6, 7, 8, 9, 10, 13, 15, 16, 17, and 27.

From: "Whomever" whomever@redstone.army.mil

To: <2028@redstone.army.mil

Subject: DA Form 2028

1. **From:** Joe Smith
2. **Unit:** home
3. **Address:** 4300 Park
4. **City:** Hometown
5. **St:** MO
6. **Zip:** 77777
7. **Date Sent:** 19-OCT-93
8. **Pub no:** 55-2840-229-23
9. **Pub Title:** TM
10. **Publication Date:** 04-JUL-85
11. **Change Number:** 7
12. **Submitter Rank:** MSG
13. **Submitter FName:** Joe
14. **Submitter MName:** T
15. **Submitter LName:** Smith
16. **Submitter Phone:** 123-123-1234
17. **Problem:** 1
18. **Page:** 2
19. **Paragraph:** 3
20. **Line:** 4
21. **NSN:** 5
22. **Reference:** 6
23. **Figure:** 7
24. **Table:** 8
25. **Item:** 9
26. **Total:** 123
27. **Text**

This is the text for the problem below line 27.

