

NI PXI-2530 Specifications

128-Channel Reed Relay Multiplexer/Matrix

This document lists specifications for the NI PXI-2530 multiplexer/matrix module. All specifications are subject to change without notice. Visit ni.com/manuals for the most current specifications.

Configurations..... 128x1 1-wire multiplexer
64x1 2-wire multiplexer
32x1 4-wire multiplexer
4x32 1-wire matrix
8x16 1-wire matrix
4x16 2-wire matrix



Note The NI PXI-2530 has eight interconnected banks of 16x1, 1-wire multiplexers. These can be used in any combination with the Independent topology.

Input Characteristics

All input characteristics are DC, AC_{rms} , or a combination unless otherwise specified.

Maximum switching voltage..... 60 VDC, 30 VAC_{rms}, CAT I
(channel-to-channel and channel-to-ground)

Maximum current..... 0.4 A
(per terminal or internal path)

Maximum switching power 10 W
(per channel, resistive)

Typical DC path resistance
(channel-to-common)

Initial.....<2 Ω
End of life \geq 3 Ω

Path resistance is a combination of relay contact resistance and trace resistance. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance may rise rapidly above 1 Ω .

Typical thermal EMF.....<50 μ V
(1-wire configuration, channel-to-common)

RF Performance Characteristics

Typical bandwidth
(50 Ω system, 1-wire configuration referenced to 1WREF)

16x1>15 MHz
128x1>3 MHz

Typical channel-to-channel isolation
(50 Ω system, 1-wire configuration referenced to 1WREF)

200 kHz>60 dB
1 MHz.....>40 dB

Dynamic Characteristics

Maximum scan rate900 channels/s

Simultaneous drive limit.....64 relays

Typical relay life

Mechanical1,000,000,000 cycles

Electrical (resistive)

10 V, 100 mA100,000,000 cycles

25 V, 400 mA5,000,000 cycles

60 V, 160 mA1,000,000 cycles



Note Reed relays are highly susceptible to damage from in-rush currents. Switching capacitive loads without resistive or inductive protection may weld the relay contacts in less than 1,000,000 cycles.

Trigger Characteristics

Input trigger

Sources PXI trigger lines 0–7,
Front panel

Minimum pulse width 150 ns

Front panel input voltage

Minimum –0.5 V

V_{IL} maximum +0.7 V

V_{IH} minimum +2.0 V

Nominal +3.3 V

Maximum +5.5 V

Output trigger

Destinations PXI trigger lines 0–7,
Front panel

Pulse width Programmable (1 μ s to 62 μ s)

Front panel nominal voltage +3.3 V TTL, 8 mA

Physical Characteristics

Relay types Reed

Contact material Rhodium

Front panel connector 176-pin docking station plug

Dimensions (W \times H \times D) 2.0 cm \times 10.0 cm \times 16.3 cm
(0.8 in. \times 3.9 in. \times 6.4 in.)

Weight 400 g
(14 oz)

Environment

Operating temperature0 °C to 55 °C

Storage temperature–20 °C to 70 °C

Relative humidity5% to 85% noncondensing

Pollution Degree2

Approved at altitudes up to 2,000 m.

Indoor use only.

Accessories

Visit ni.com for more information about the following accessories.

Table 1. Accessories Available for the NI PXI-2530

Accessory	Part Number
NI TB-2630 Terminal Block (multiplexer)	778733-01
NI TB-2631 Terminal Block (4x32 1-wire matrix, 4x16 2-wire matrix)	778734-01
NI TB-2632 Terminal Block (8x16 1-wire matrix)	778735-01

Table 2. Third-Party Accessories for the NI PXI-2530

Accessory	Manufacturer	Manufacturer Part Number
Mating front panel connector, right-angle	Molex	52755-1760

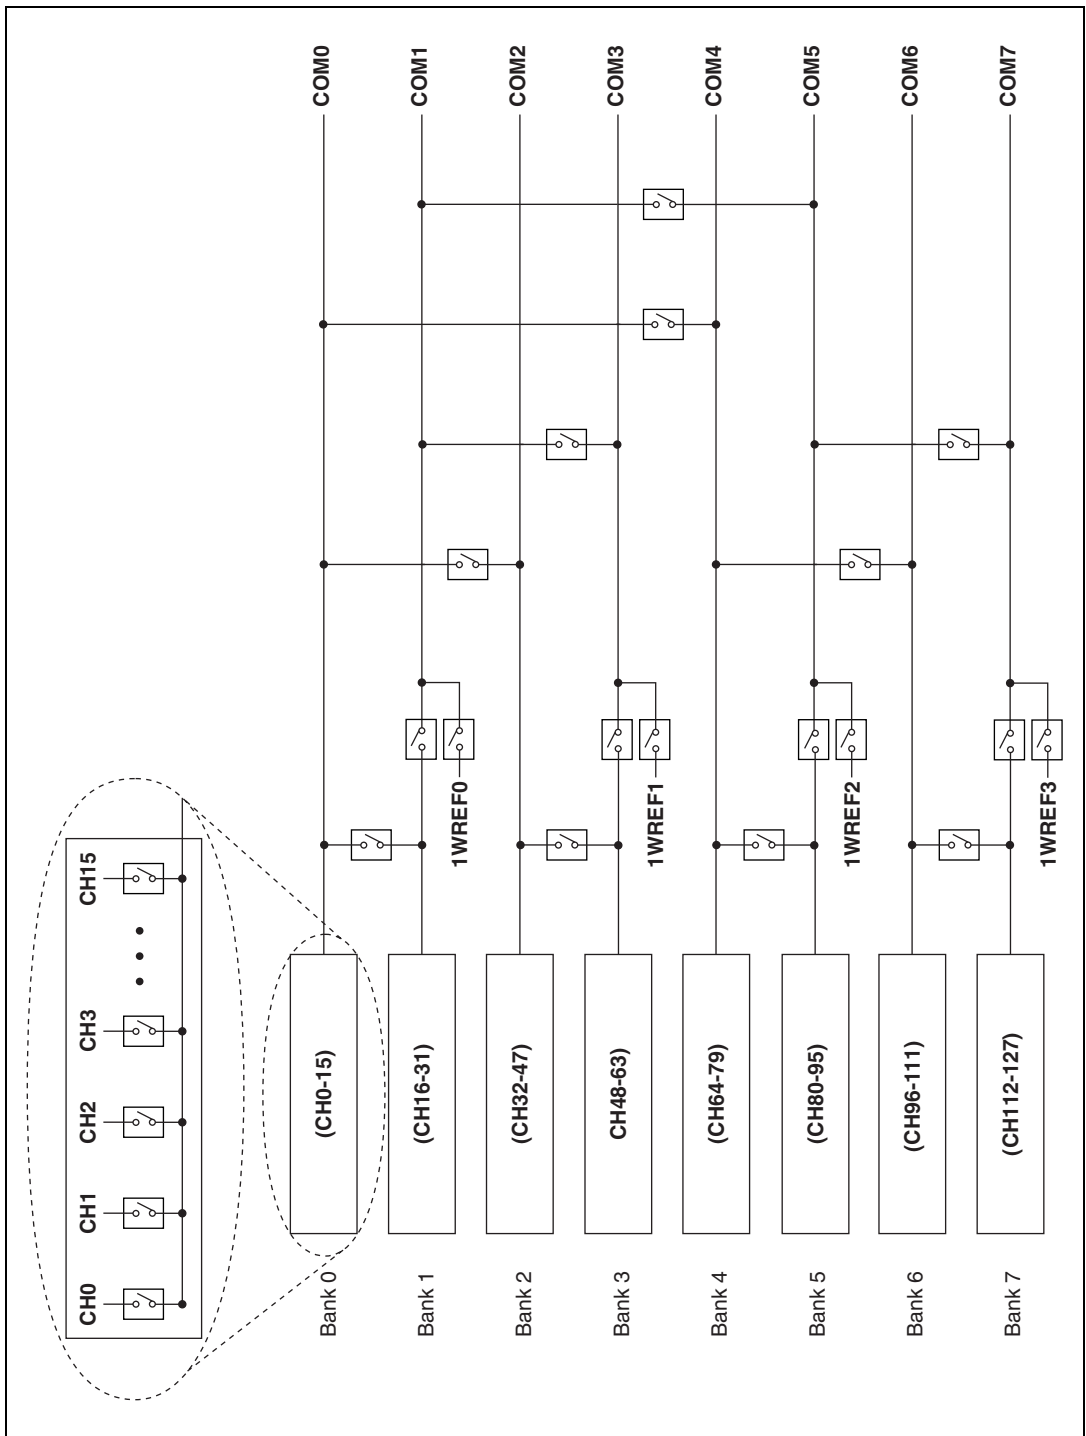


Figure 1. NI PXI-2530 Power On State (All Relays Open)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1



Note For UL and other safety certifications, refer to the product label or visit ni.com/hardref.nsf, search by model number or product line, and click the appropriate link in the Certification column.

Electromagnetic Compatibility

Emissions.....EN 55011 Class A at 10 m
FCC Part 15A above 1 GHz

ImmunityEN 61326:1997 + A2:2001,
Table 1

CE, C-Tick, and FCC Part 15 (Class A) Compliant



Note For EMC compliance, you *must* operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

Low-Voltage Directive (safety).....73/23/EEC

Electromagnetic Compatibility
Directive (EMC)89/336/EEC



Note Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/hardref.nsf, search by model number or product line, and click the appropriate link in the certification column.

National Instruments™, NI™, and ni.com™ are trademarks of National Instruments Corporation. Product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or ni.com/patents.

© 2003 National Instruments Corp. All rights reserved.



323467B-01

Oct03