

Low Cost Multi-Chemistry Battery Charger Controller

The ISL6252, ISL6252A is a highly integrated battery charger controller for Li-ion/Li-ion polymer batteries and NiMH batteries. High Efficiency is achieved by a synchronous buck topology and the use of a MOSFET, instead of a diode, for selecting power from the adapter or battery. The low side MOSFET emulates a diode at light loads to improve the light load efficiency and prevent system bus boosting.

The constant output voltage can be selected for 2-, 3- and 4-series Li-ion cells with 0.5% accuracy over-temperature. It can be also programmed between 4.2V +5%/cell and 4.2V -5%/cell to optimize battery capacity. When supplying the load and battery charger simultaneously, the input current limit for the AC adapter is programmable to within 3% accuracy to avoid overloading the AC adapter, and to allow the system to make efficient use of available adapter power for charging. It also has a wide range of programmable charging current. The ISL6252, ISL6252A provides outputs that are used to monitor the current drawn from the AC adapter, and monitor for the presence of an AC adapter. The ISL6252, ISL6252A automatically transitions from regulating current mode to regulating voltage mode.

Ordering Information

| PART NUMBER (Note) | PART MARKING | TEMP RANGE (°C) | PACKAGE (Pb-Free) | PKG. DWG. # |
|--------------------|--------------|-----------------|-------------------|-------------|
| ISL6252HRZ* | ISL 6252HRZ | -10 to +100 | 28 Ld 5x5 QFN | L28.5x5 |
| ISL6252AHRZ* | ISL6252 AHRZ | -10 to +100 | 28 Ld 5x5 QFN | L28.5x5 |

*Add "-T" suffix for tape and reel. Please refer to TB347 for details on reel specifications.

NOTE: These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate PLUS ANNEAL - e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

Features


- ±0.5% Charge Voltage Accuracy (-10°C to +100°C)
- ±3% Accurate Input Current Limit
- ±3% Accurate Battery Charge Current Limit
- ±25% Accurate Battery Trickle Charge Current Limit (ISL6252A)
- Programmable Charge Current Limit, Adapter Current Limit and Charge Voltage
- Fixed 300kHz PWM Synchronous Buck Controller with Diode Emulation at Light Load
- Output for Current Drawn from AC Adapter
- AC Adapter Present Indicator
- Fast Input Current Limit Response
- Input Voltage Range 7V to 25V
- Support 2-, 3- and 4-Cell Battery Pack
- Up to 17.64V Battery-Voltage Set Point
- Thermal Shutdown
- Support Pulse Charging
- Less than 10µA Battery Leakage Current
- Charge Any Battery Chemistry: Li-Ion, NiCd, NiMH, etc.
- Pb-Free (RoHS Compliant)

Applications

- Notebook, Desknote and Sub-notebook Computers
- Personal Digital Assistant)

Pinout

ISL6252, ISL6252A
(28 LD QFN)
TOP VIEW

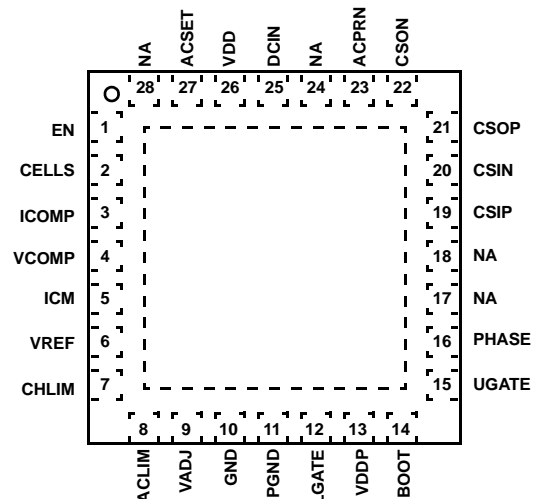

What's Inside

This Evaluation Board Kit contains the following materials:

- Qty(1) ISL625xEVAL1Z Evaluation Board
- Qty(1) ISL6252EVAL1Z Setup Procedure

What is Needed

The following materials are recommended to perform testing:

- One adjustable 25V 6A power supply
- Two adjustable electronic loads with constant current mode and constant voltage mode
- Two DVMs
- One 500MHz four channel oscilloscope
- Four passive oscilloscope voltage probes
- Two 10ADC Current Probes
- One signal generator

Jumper Selection Guide

Step 1: Select the Number of Cells (Table 1)

The CELLS pin chooses the correct output voltage clamp for a given number of cells series-connected in the battery pack. Select the output voltage by placing a shunt jumper across the appropriate pins of JP1.

TABLE 1. JUMPER JP1 FUNCTIONS

| SHUNT JUMPER LOCATION | CELLS PIN CONNECTED TO: | NUMBER OF CELLS CONNECTED IN SERIES | 100% CONSTANT OUTPUT VOLTAGE |
|-----------------------|-------------------------|-------------------------------------|------------------------------|
| 1-2 | VDD | 4 | 16.8 |
| 2-3 | GND | 3 | 12.6 |
| Removed | Floating | 2 | 8.4 |

Step 2: Select the Cell Trim Voltage (Table 2)

The VADJ pin trims the battery charger output voltage limit. Preset battery charger output voltage limits are selected by placing a shunt jumper across the appropriate pins of JP6. For other battery charger output voltage limits install a shunt jumper across pins 3 and 4 which connects the wiper of potentiometer R24 to VADJ. Potentiometer R24 may be removed and replaced with resistors R₁₉ and R₂₁. Resistor R₂₀ limits the trim increase to 1%. Shorting R₂₀ allows the trim to increase 5%. Decreasing trim range is unaffected.

TABLE 2. JUMPER JP6 FUNCTIONS

| SHUNT JUMPER LOCATION | VADJ PIN | BATTERY VOLTAGE CHANGE PER CELL |
|-----------------------|---|---------------------------------|
| 1-3 | To VREF | +5% |
| 3-5 | To GND | -5% |
| 5-6 | Floating | None |
| 3-4 | R24 Wiper or R ₁₉ /R ₂₁ | Adjustable between -5% to +5% |

Step 3: Select the Battery Charger Current Limit (Table 3)

The CHLIM pin chooses the desired battery charger current limit threshold. Preset battery charger current limit thresholds are selected by placing a shunt jumper across the appropriate pins of JP4. For other battery charger current limit thresholds, install a shunt jumper across pins 3 and 4, which connects the wiper of potentiometer R22 to CHLIM. Potentiometer R22 may be removed and replaced with resistors R₆ and R₇.

TABLE 3. JUMPER JP4 FUNCTIONS

| SHUNT JUMPER LOCATION | CHLIM PIN CONNECTED TO: | 100% CURRENT FEEDBACK CSOP TO CSON | 100% CONSTANT CURRENT |
|-----------------------|---------------------------------------|------------------------------------|-----------------------|
| 1-3 | VREF | 120mV | 4.80A |
| Removed | Floating | 0V | 0A |
| 3-5 | GND | 0V | 0A |
| 3-4 | R22 or R ₆ /R ₇ | 0mV to 120mV | 0A to 4.8A |

Step 4: Select the AC Adapter Current Limit (Table 4)

The ACLIM pin chooses the desired AC adapter current limit threshold. Preset AC adapter current limit thresholds are selected by placing a shunt jumper across the appropriate pins of JP5. For other AC adapter current limit thresholds install a shunt jumper across pins 3 and 4 which connects the wiper of potentiometer R23 to ACLIM. Potentiometer R23 may be removed and replaced with resistors R₁₇ and R₁₈.

TABLE 4. JUMPER JP5 FUNCTIONS


| SHUNT JUMPER LOCATION | ACLIM PIN CONNECTED TO: | 100% CURRENT FEEDBACK CSIP TO CSIN | 100% ADAPTER CURRENT |
|-----------------------|---|------------------------------------|----------------------|
| 1-3 | VREF | 100mV | 5.15A |
| Removed | Floating | 75mV | 3.90A |
| 3-5 | GND | 50mV | 2.65A |
| 3-4 | R23 or R ₁₇ /R ₁₈ | 50mV to 100mV | 2.65A to 5.15A |

Interface Connections

TABLE 5.

| HEADER | PIN# | CONNECT TO |
|------------------------------|------|----------------------------|
| H1 Input Power | 1 | "+" INPUT POWER |
| | 2 | "+" SENSE (if used) |
| | 3 | "-" SENSE (if used) |
| | 4 | "-" INPUT POWER |
| H2 System Load Output | 1 | "+" SYSTEM LOAD OUTPUT |
| | 2 | "+" SENSE (if used) |
| | 3 | "-" SENSE (if used) |
| | 4 | "-" SYSTEM LOAD OUTPUT |
| H3 Battery Charger Output | 1 | "+" BATTERY CHARGER OUTPUT |
| | 2 | "+" SENSE (if used) |
| | 3 | "-" SENSE (if used) |
| | 4 | "-" BATTERY CHARGER OUTPUT |

ISL6252AEVAL1Z Schematic

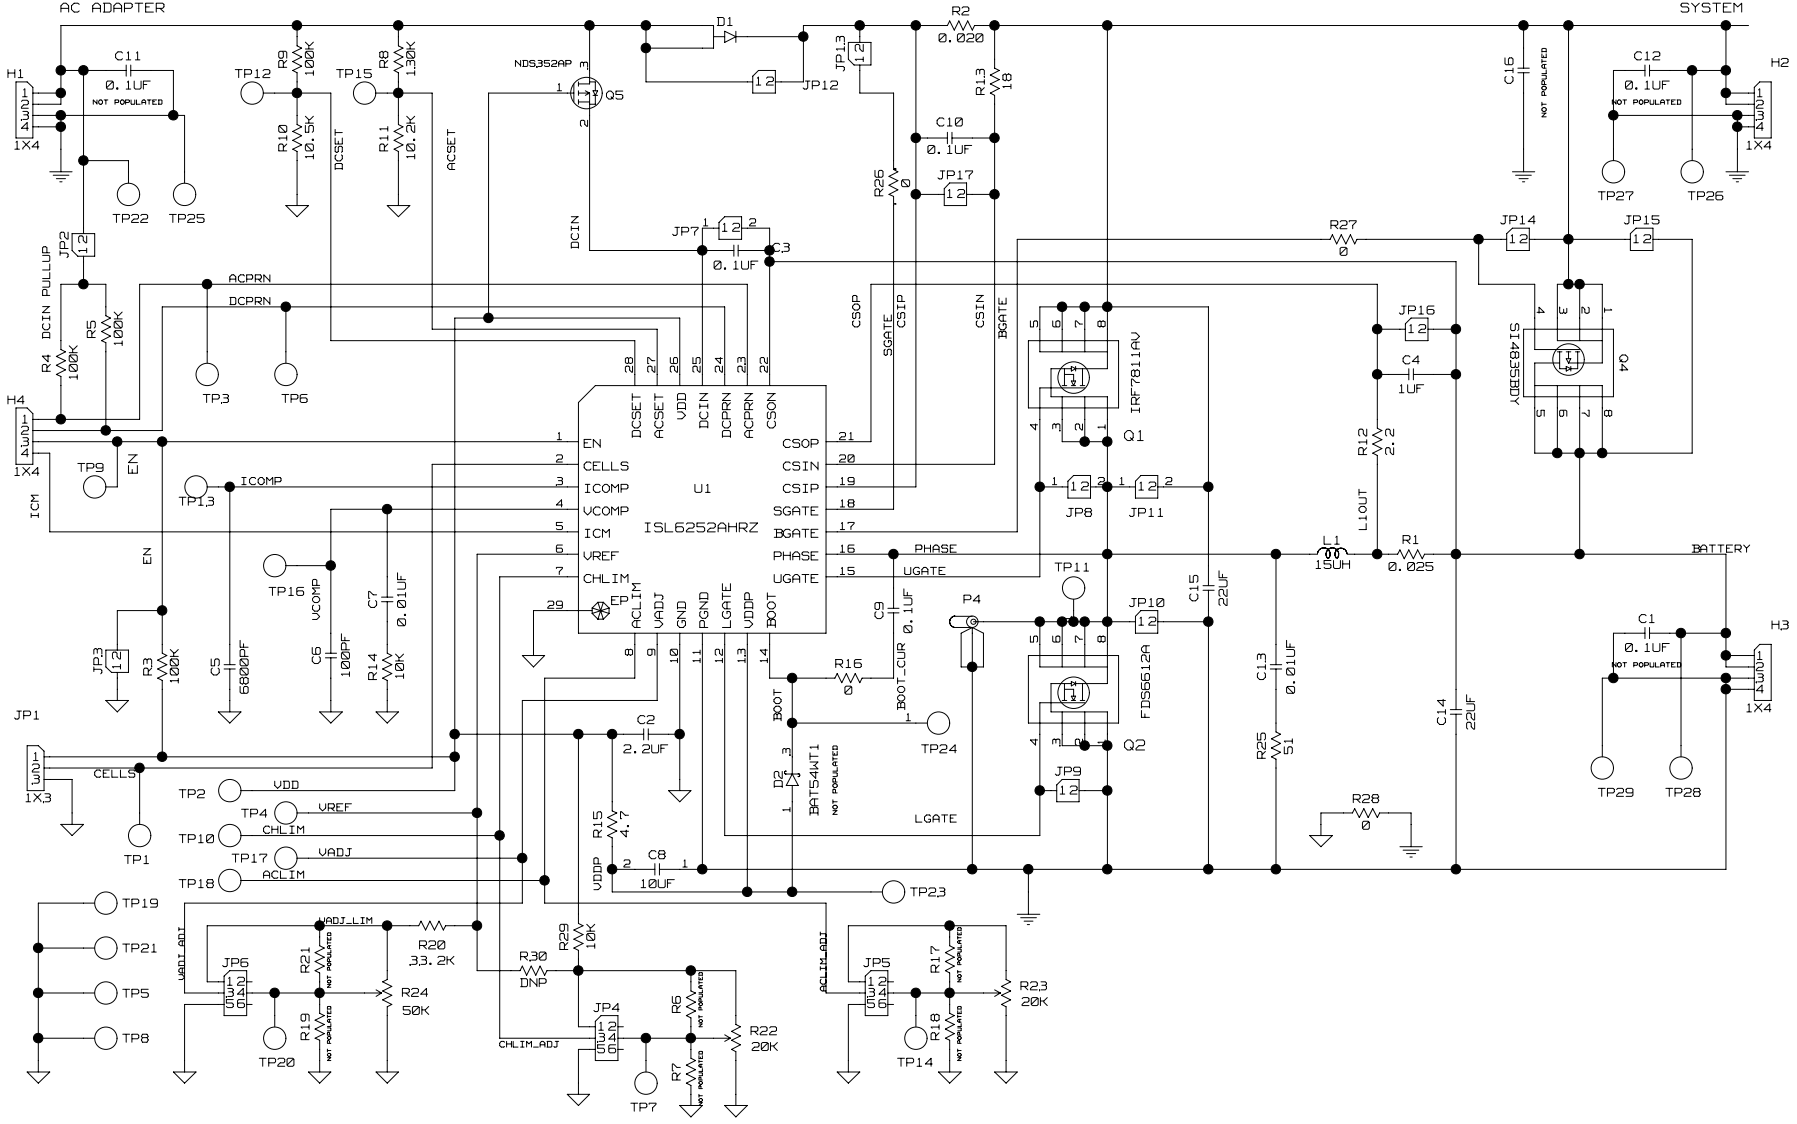

Application Note 1361

TABLE 6. BILL OF MATERIALS

| QTY | REF DES | DESCRIPTION | MFG NAME | PART NUMBER |
|-----|-------------|--|-------------|-----------------------|
| 1 | C6 | Capacitor, SMD, 0603, 100pF, 50V, 5%, COG | TDK | C1608COG1H101J |
| 1 | C7 | Capacitor, SMD, 0805, 0.01μF, 50V, 5%, COG | TDK | C2012COG1H103J |
| 1 | C5 | Capacitor, SMD, 0805, 6800pF, 50V, 5%, COG | TDK | C2012COG1H682J |
| 3 | C2, C4, C8 | Capacitor, SMD, 0805, 1.0μF, 16V, 20%, X7R | TDK | C2012X7R1C105M |
| 3 | C3, C9, C10 | Capacitor, SMD, 0805, 0.1μF, 50V, 10%, X7R | TDK | C2012X7R1H104K |
| 2 | C14, C15 | Capacitor, SMD, 1812, 22μF, 25V, 20%, X5R | TDK | C4532X5R1E226M |
| 1 | D2 | SURFACE MOUNT SCHOTTKY BARRIER DIODE | Diodes Inc. | BAT54WT1 |
| 1 | L1 | CHOKER, SMD, 8MM, 4.6μH, 9.1A, SHIELDED | Sumida | CDRH127/LD-4R6NC |
| 1 | U1 | IC, Battery Charger, 28P, QFN, -10°C to +100°C | Intersil | ISL6252HR |
| 1 | Q2 | MOSFET, N-CH, 8P, SOIC, 30V, 8.4A, 0.022Ω | Fairchild | FDS6612A |
| 1 | Q1 | MOSFET, N-CH, 8P, SOIC, 30V, 10.8A, 0.011Ω | IR | IRF7811AV |
| 1 | Q5 | MOSFET, P-CH, 3P, SOT23, -30V, -0.9A, 0.5Ω | Fairchild | NDS352AP |
| 2 | D1 | POWER SCOTTKY DIODE, 10A, 40V | Diodes Inc. | PDS1040 |
| 1 | D2 | SURFACE MOUNT SCHOTTKY BARRIER DIODE | Diodes Inc. | BAT54WT1 |
| 1 | R2 | Resistor, Shunt, SMD, 2010, 0.020Ω, 1W, 1% | IRC | LRC-LRF2010-01-R020-F |
| 1 | R1 | Resistor, Shunt, SMD, 2010, 0.025Ω, 1W, 1% | IRC | LRC-LRF2010-01-R025-F |
| 1 | R13 | Resistor, SMD, 0805, 18Ω, 0.125W, 5% | KOA | RK73B2AT180J |
| 1 | R12 | Resistor, SMD, 0805, 2.2Ω, 0.125W, 5% | KOA | RK73B2AT2R2J |
| 1 | R15 | Resistor, SMD, 0805, 4.7Ω, 0.125W, 5% | KOA | RK73B2AT4R7J |
| 1 | R14 | Resistor, SMD, 0805, 10kΩ, 0.125W, 1% | KOA | RK73H2AT1002F |
| 1 | R11 | Resistor, SMD, 0805, 7.87kΩ, 0.125W, 1% | KOA | RK73H2AT7871F |
| 3 | R3, R4, R8 | Resistor, SMD, 0805, 100kΩ, 0.125W, 1% | KOA | RK73H2AT1003F |
| 1 | R20 | Resistor, SMD, 0805, 33.2kΩ, 0.125W, 1% | KOA | RK73H2AT3322F |
| 2 | R10, R16 | Resistor, SMD, 0805, 0Ω, 2A, 50mΩ Max | KOA | RK73Z2AT |

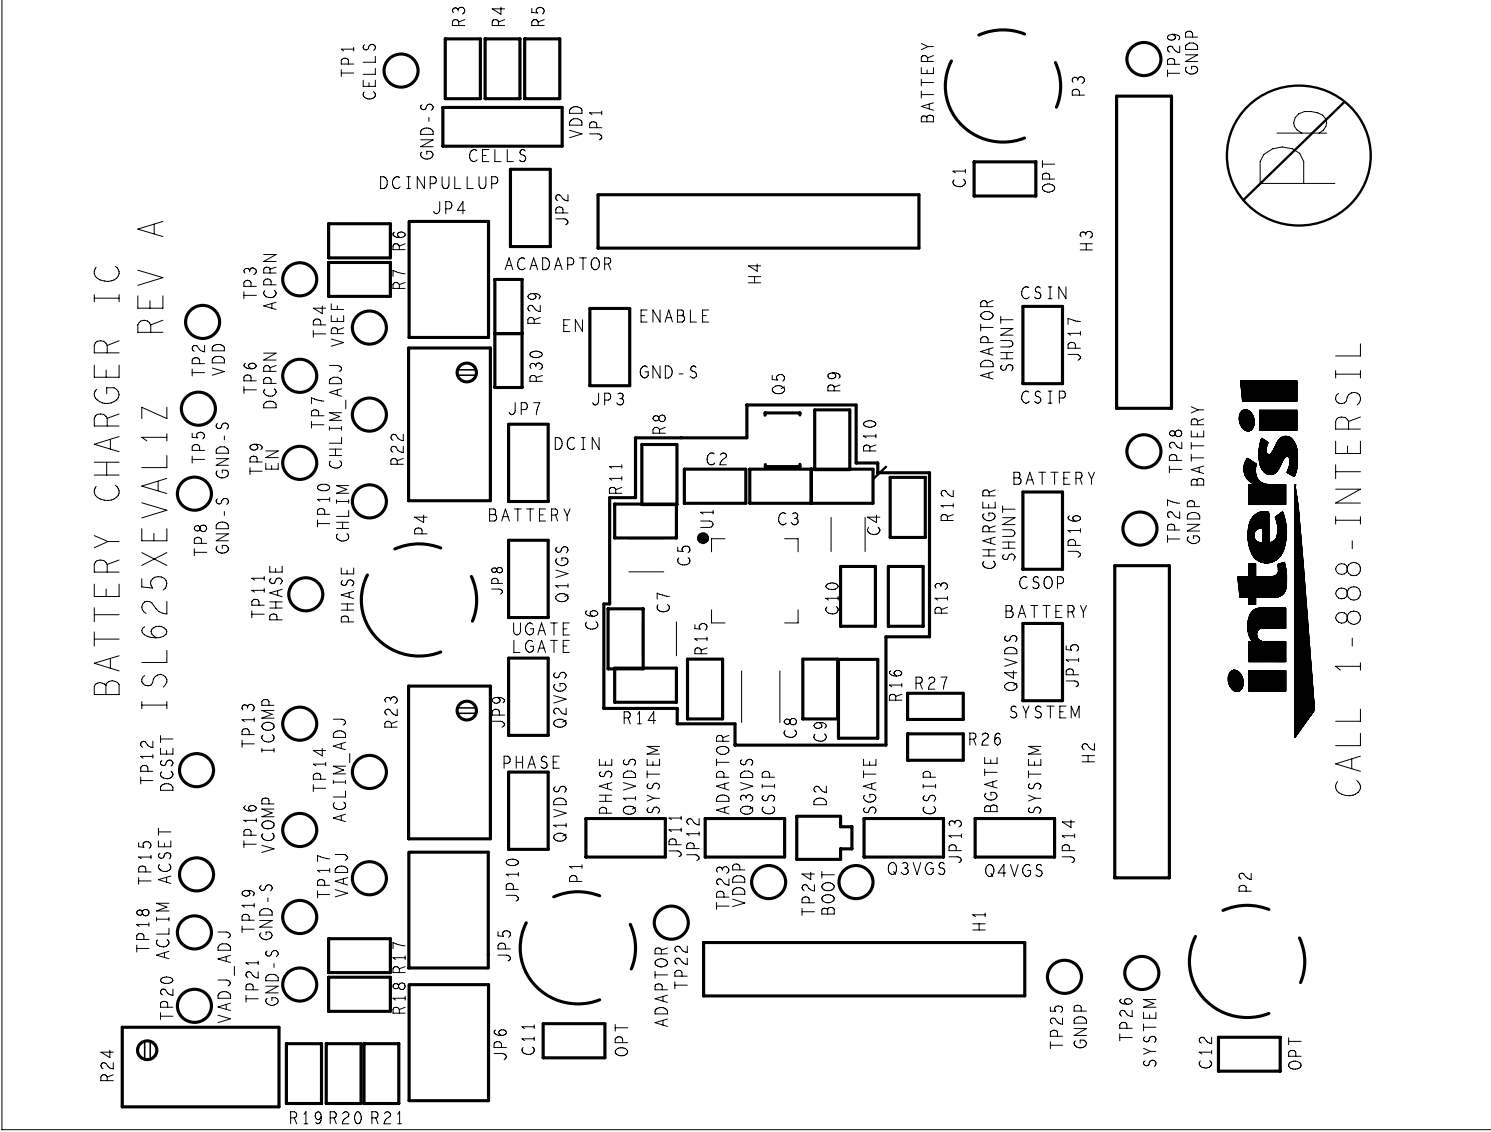


FIGURE 1. TOP SILK

intersil

CALL 1-888-INTERSIL

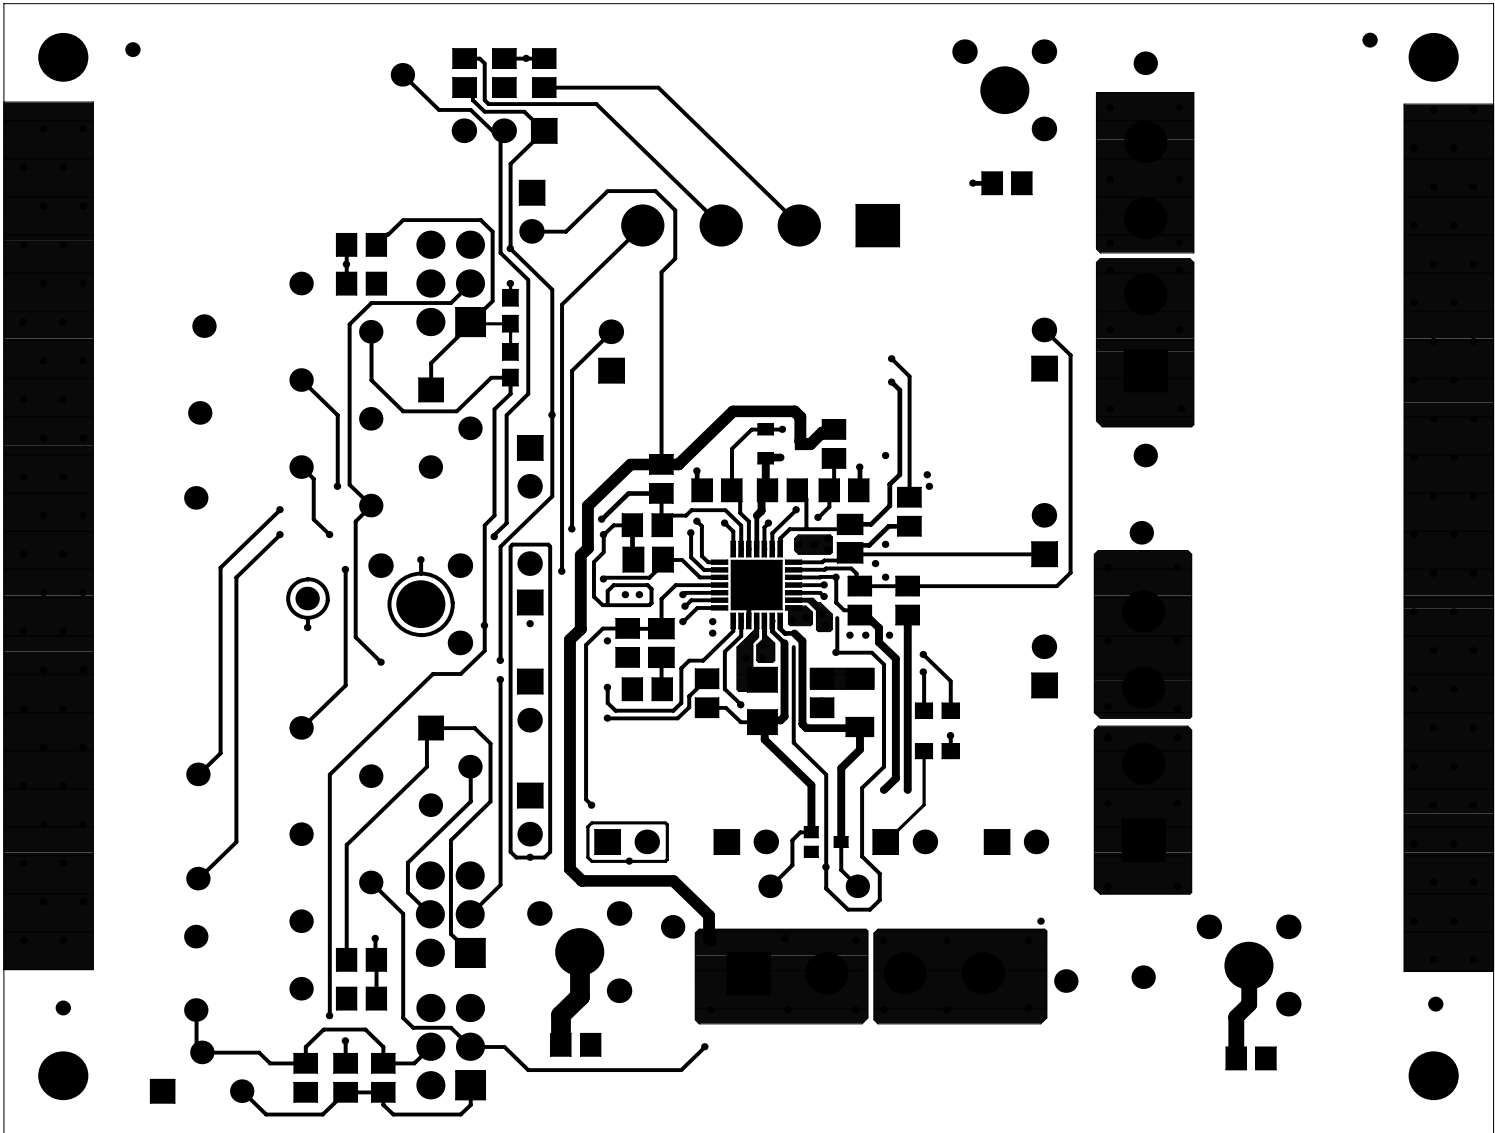


FIGURE 2. TOP LAYER

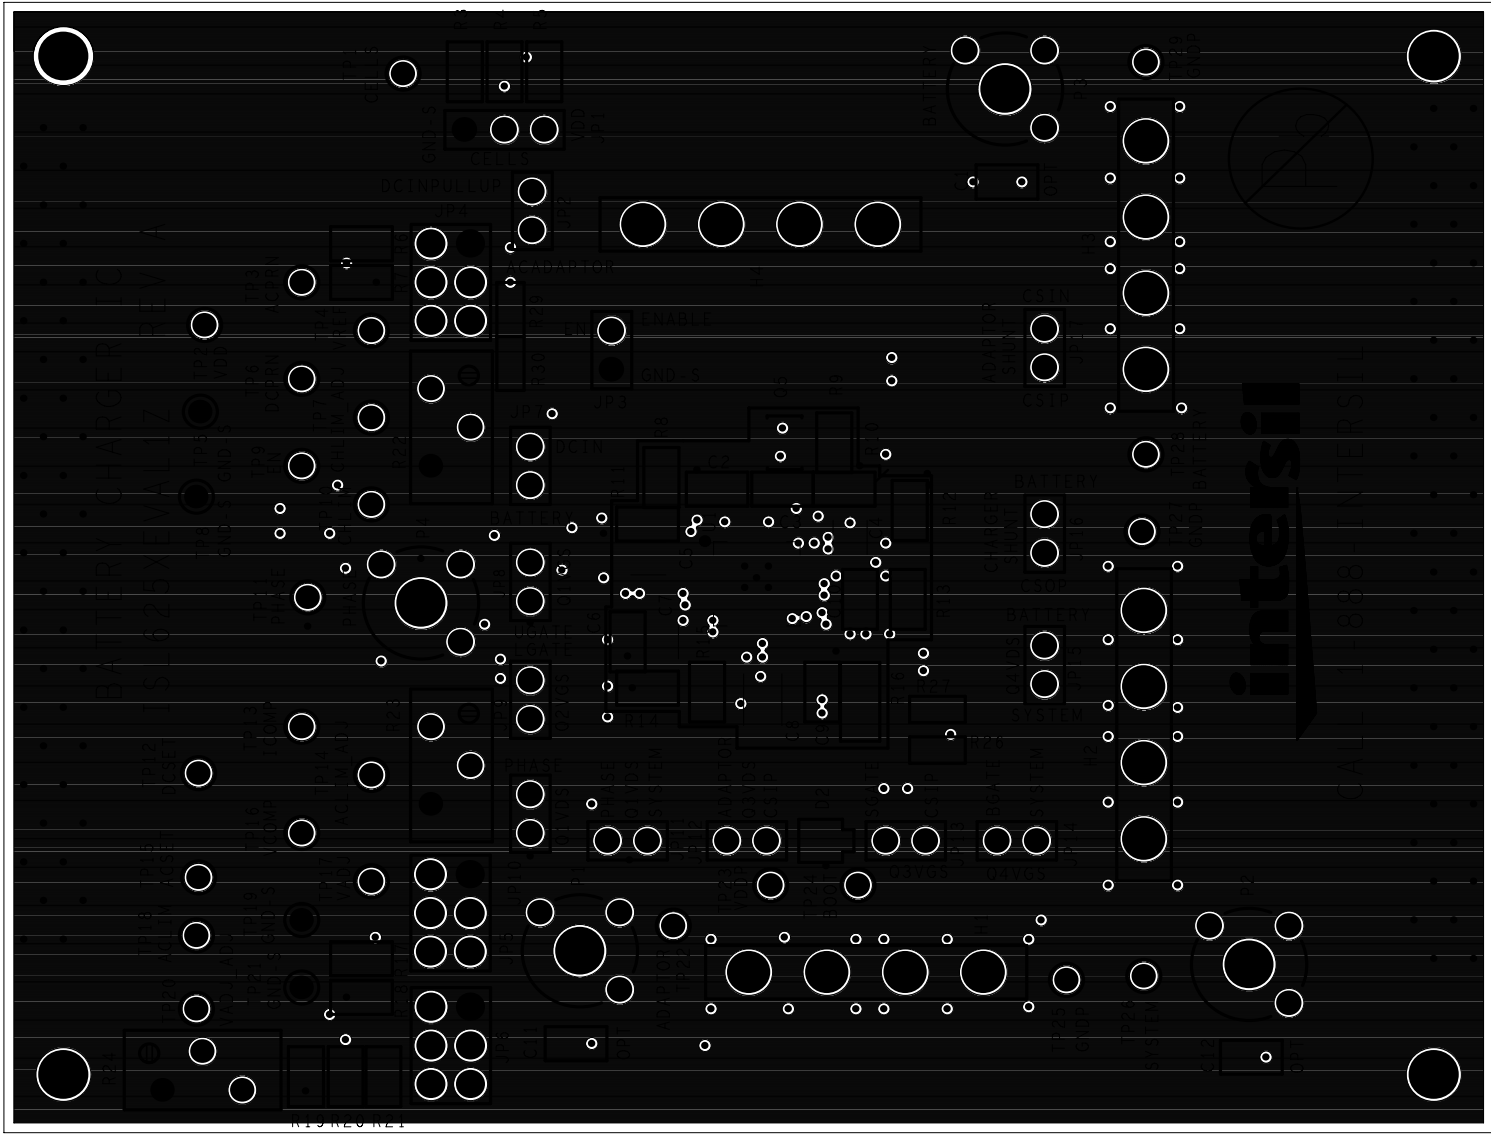


FIGURE 3. LAYER 2 GROUND (TOP VIEW)

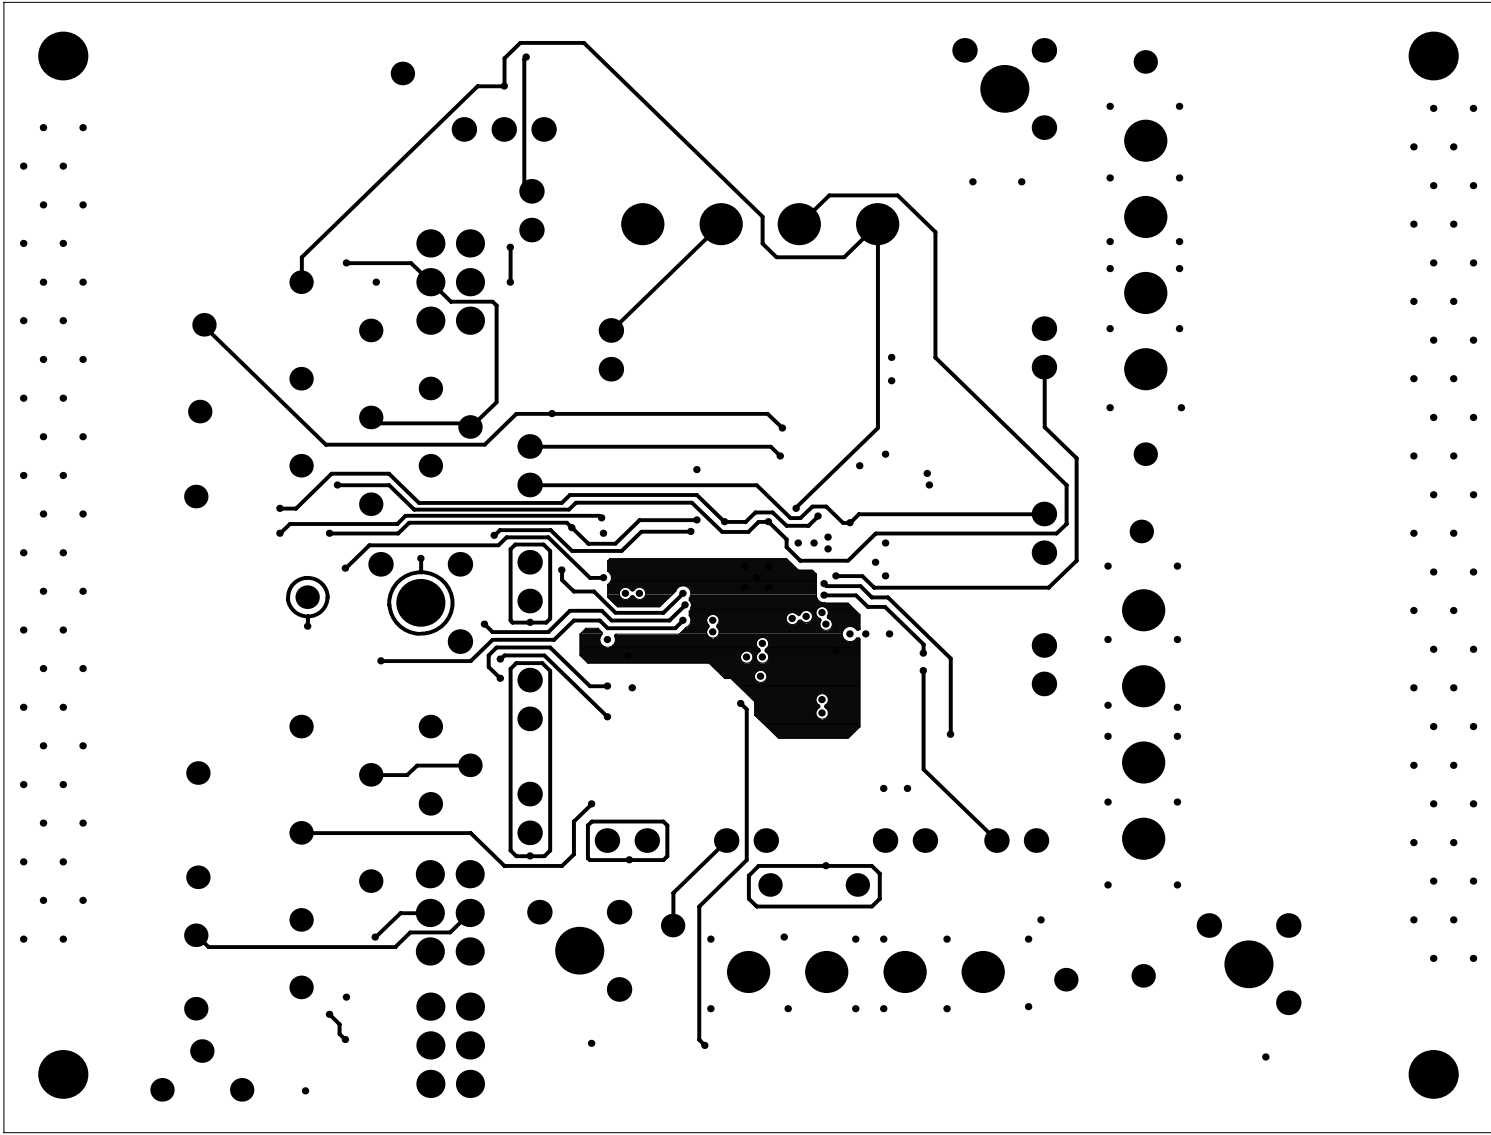


FIGURE 4. LAYER 3 SIGNAL (TOP VIEW)

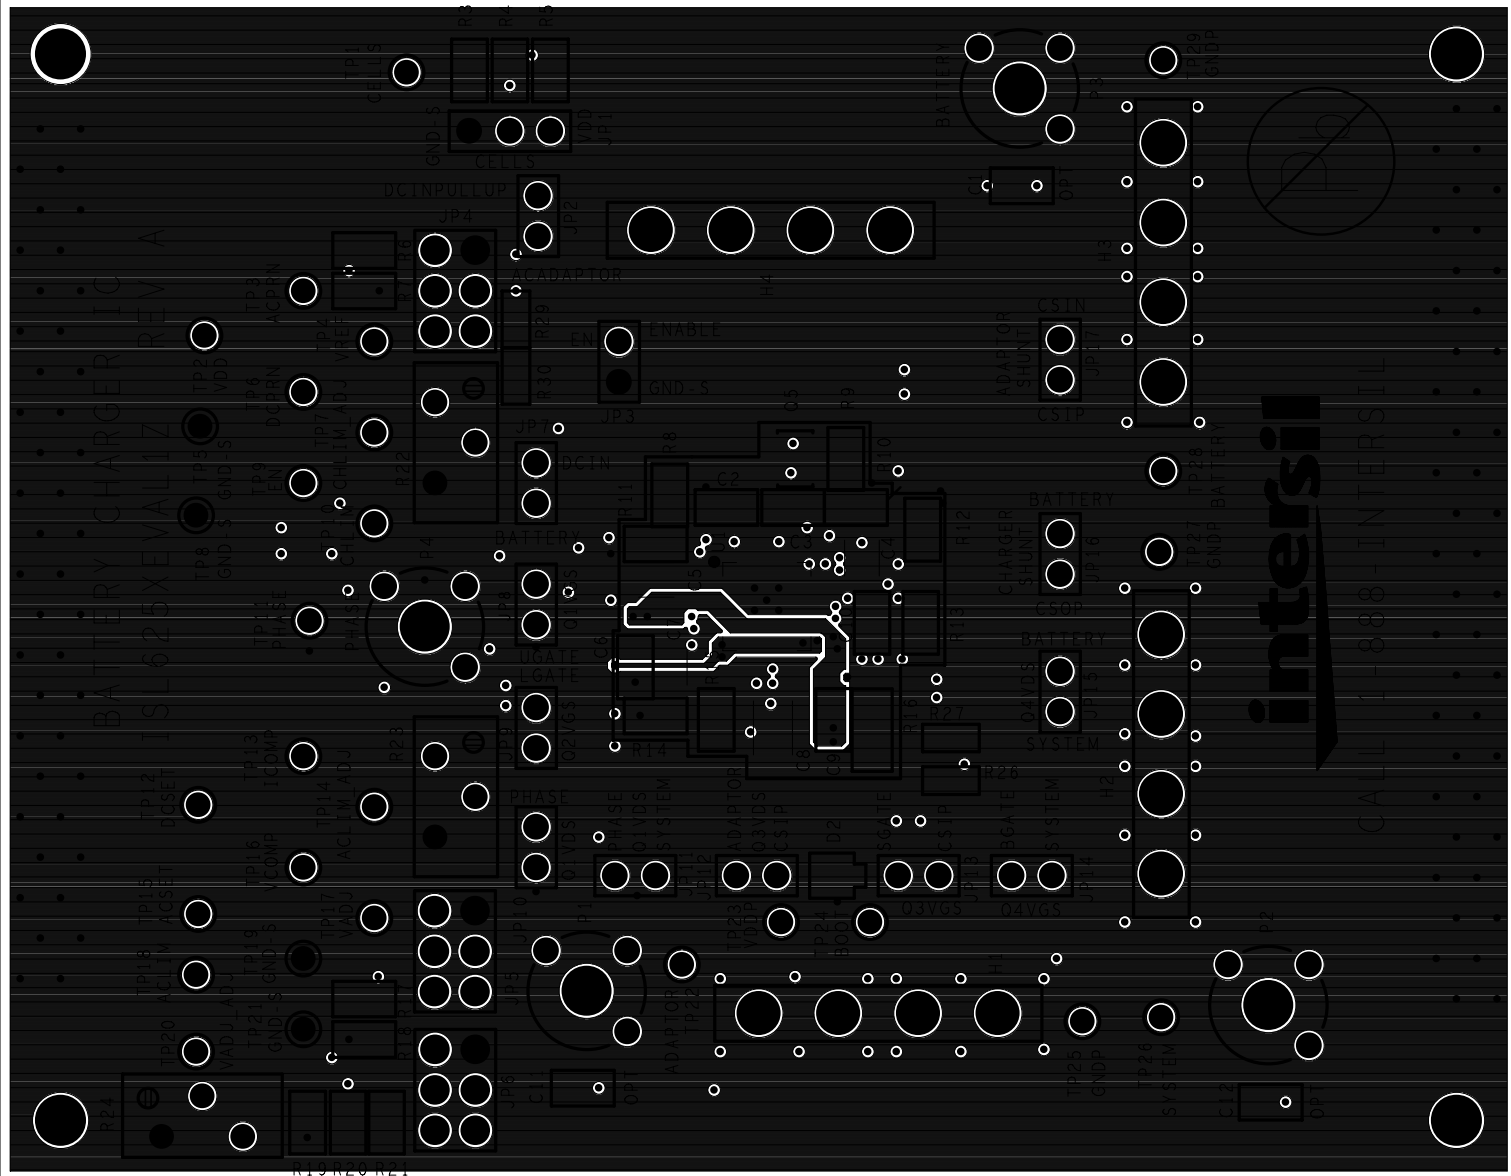


FIGURE 5. LAYER 4 GROUND (TOP VIEW)

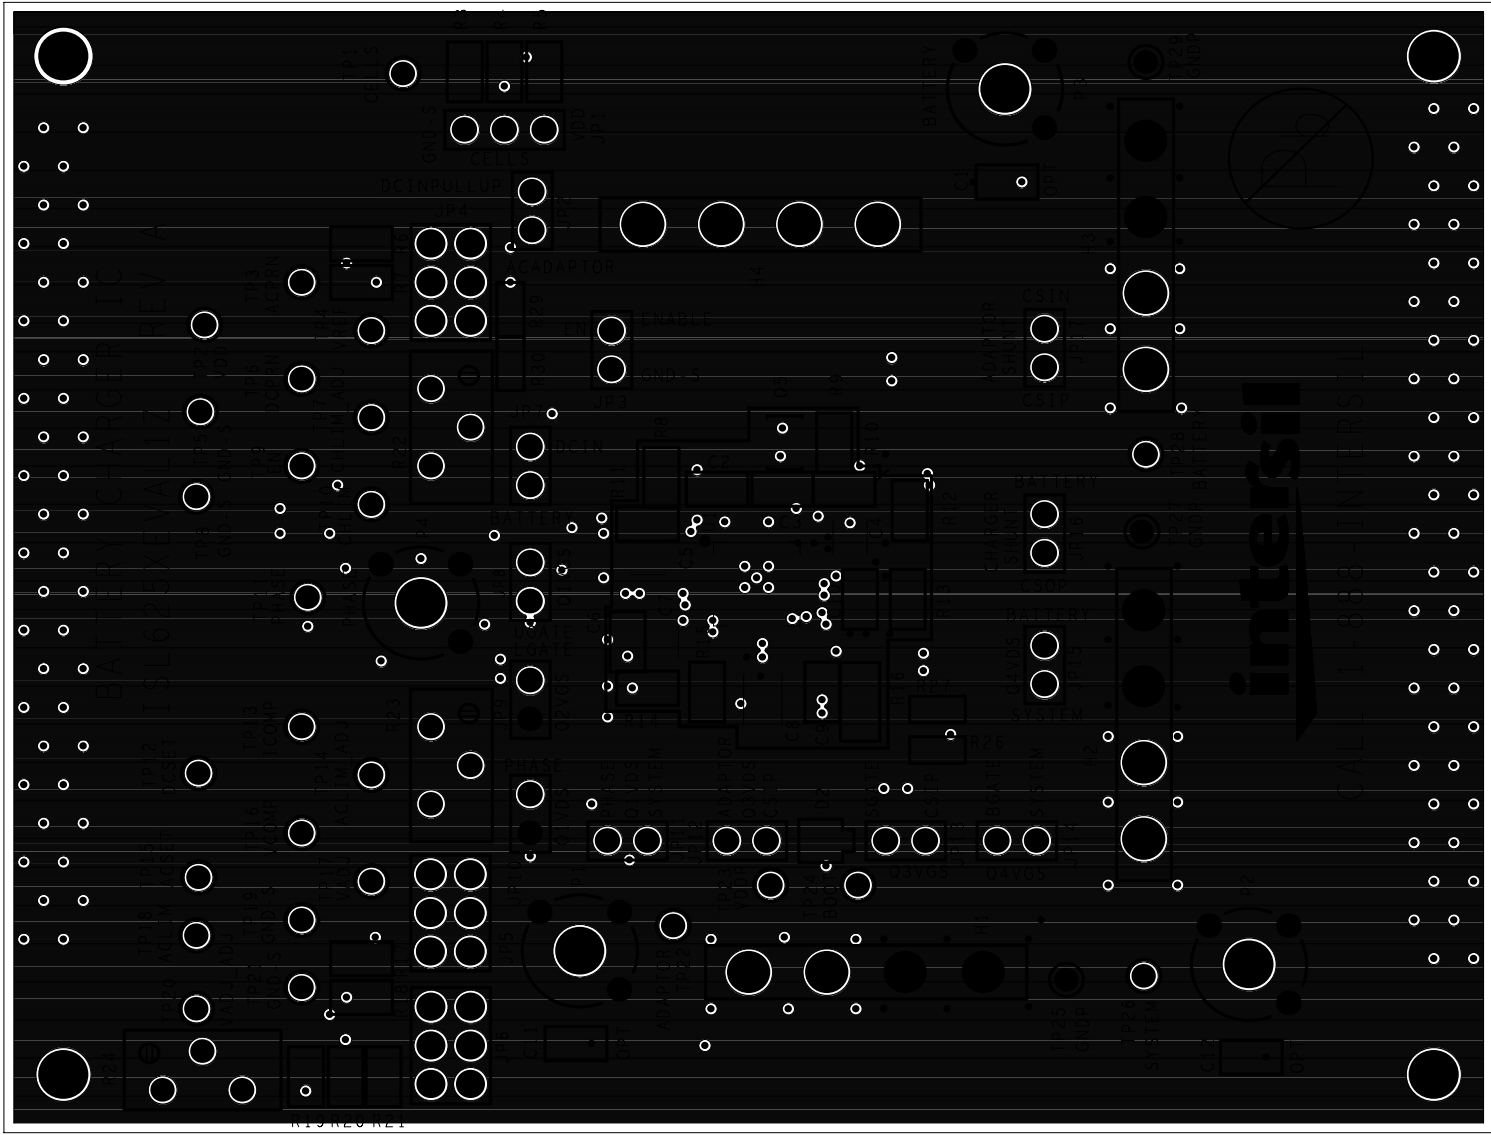


FIGURE 6. LAYER 5 GND (TOP VIEW)

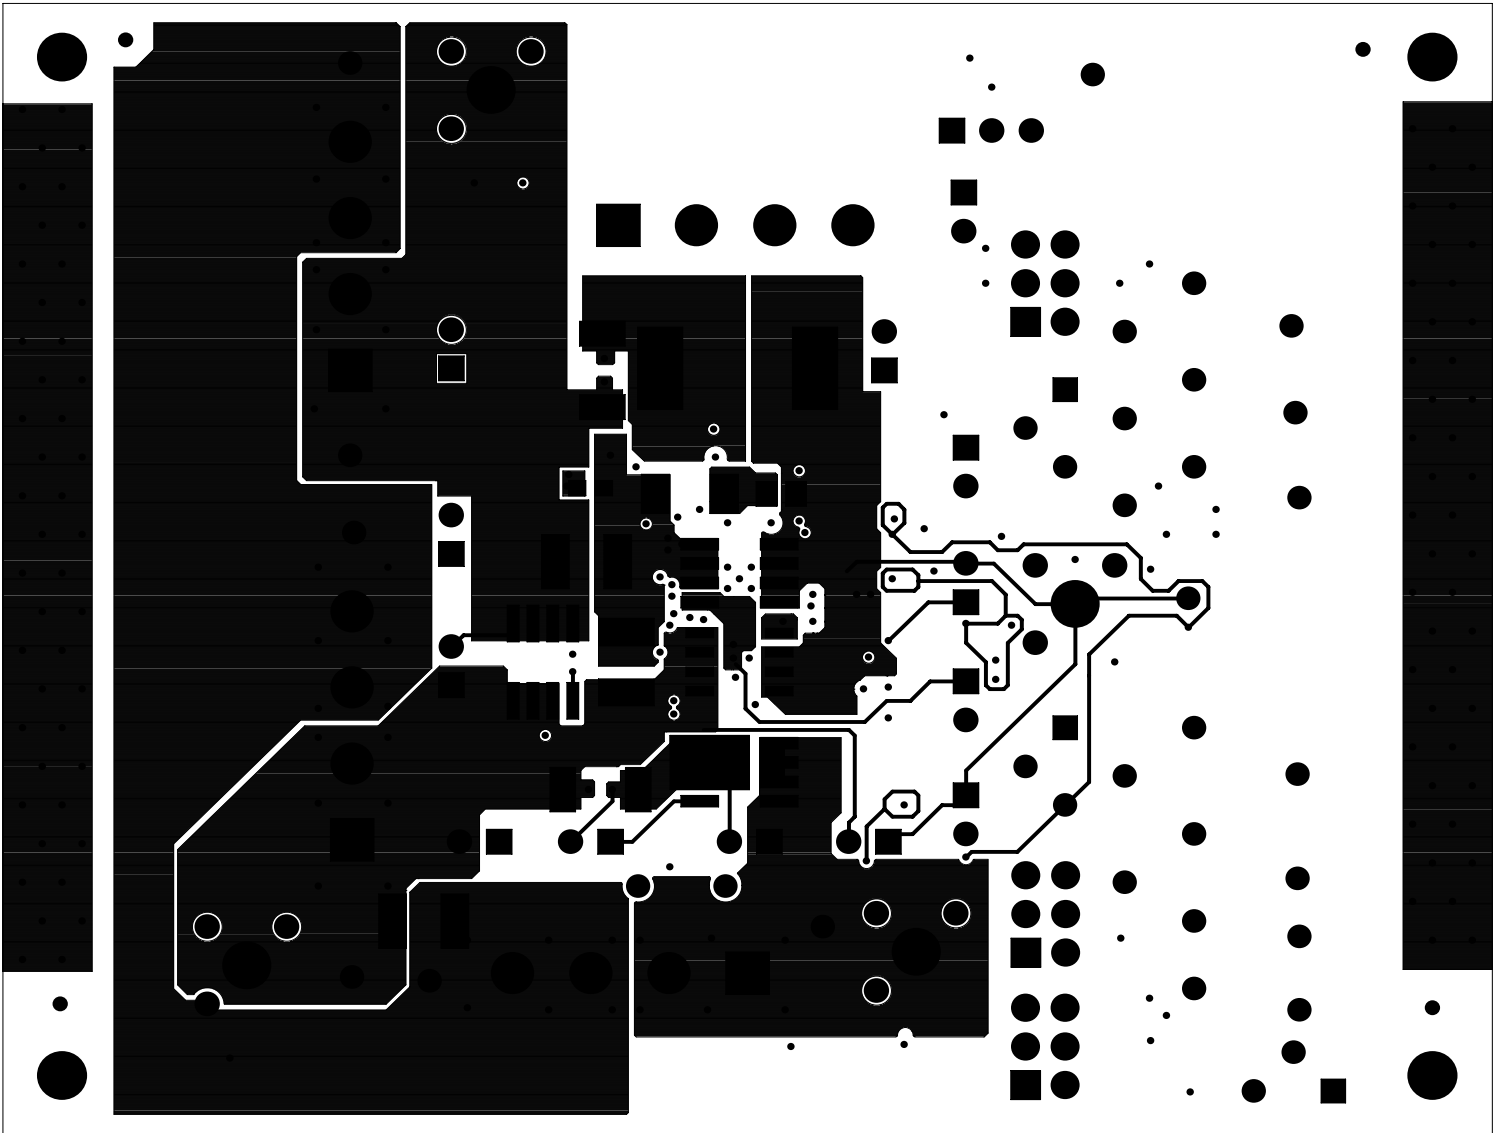


FIGURE 7. BOTTOM COPPER (BOTTOM VIEW)

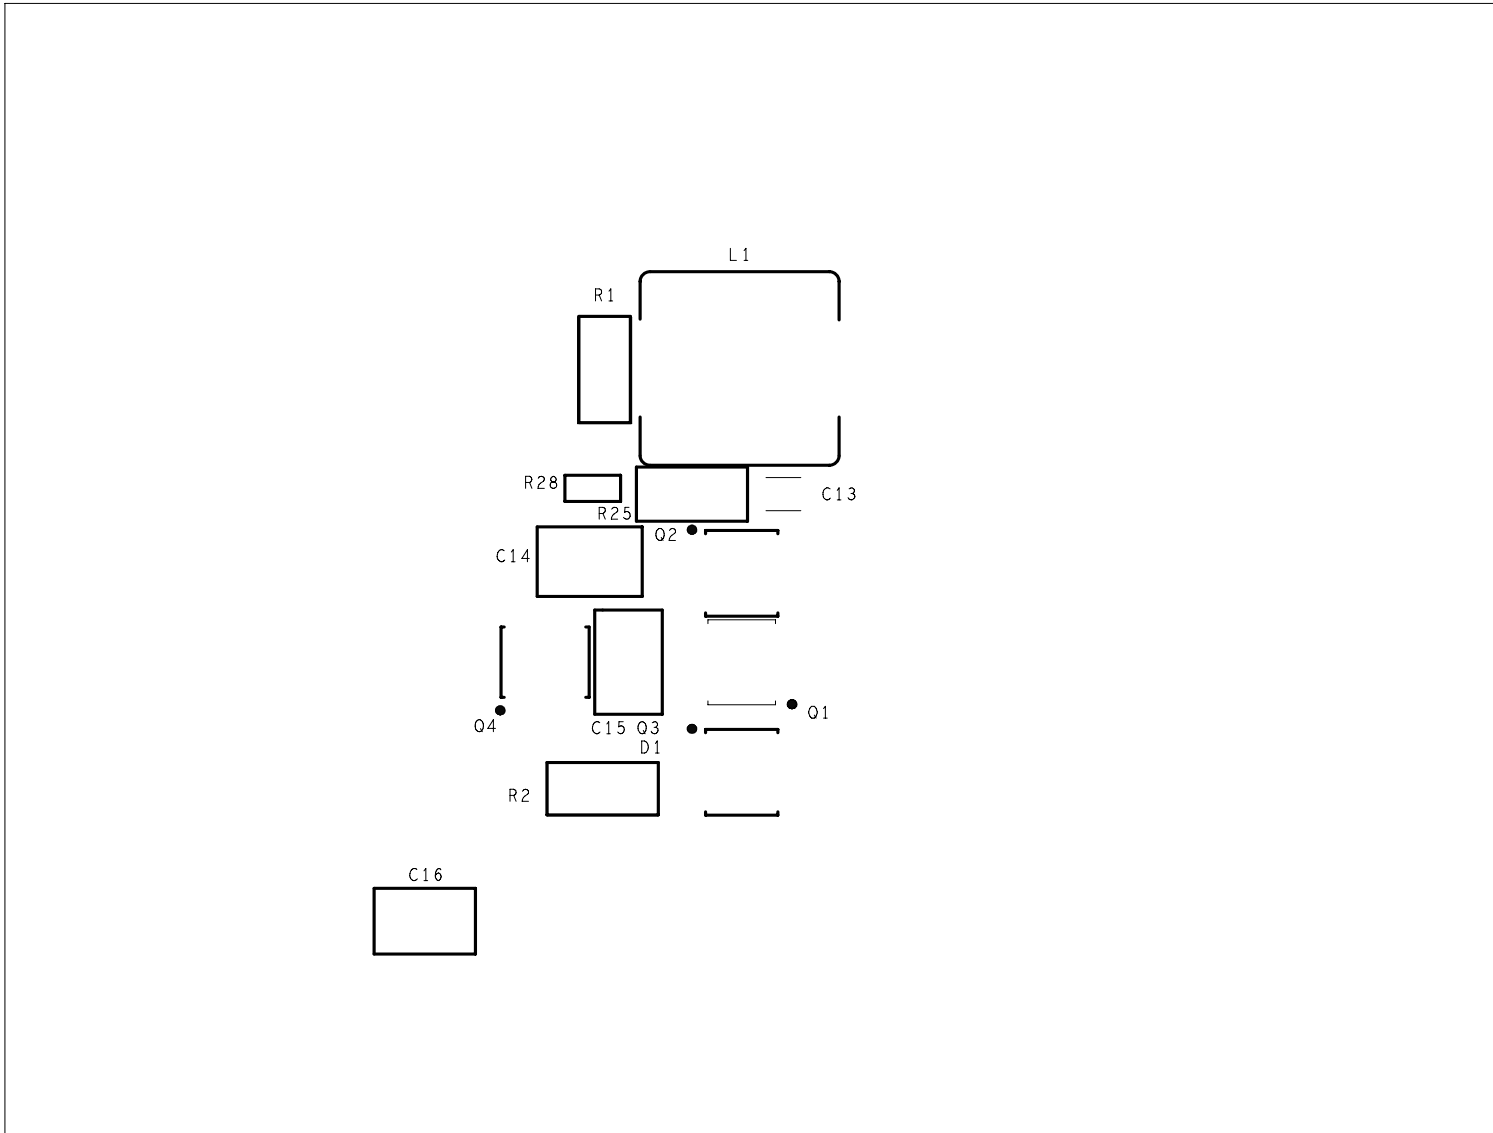


FIGURE 8. BOTTOM SILK (BOTTOM VIEW)

Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that the Application Note or Technical Brief is current before proceeding.

For information regarding Intersil Corporation and its products, see www.intersil.com