

JAEGER ELEKTRONIK


SEMICON 1997

Original	Fabric.	Constr.	Info	(Compl. Fig.)	JAEGER	Fig.	International
K 427-800A.B	Phi	MOS-N-FET-e	VFET, 600/30V, 45W, 80/275ns(2.8A) A: 4.3/17A, $\lt;1\Omega(6.5A)$, B: 3.9/16A, $\lt;1.2\Omega(6.5A)$	16c	SOT-199		BUK 727-600, 2SK1463, 2SK1684, 2SK1859
K 428-500A.B	Phi	MOS-N-FET-e	VFET, 500/30V, 45W, 120/410ns(2.9A) A: 6.8/27A, $\lt;0.4\Omega(8A)$, B: 6.1/24A, $\lt;0.5\Omega(8A)$	16c	SOT-199		2SK1206, 2SK1523, 2SK1696, 2SK1832
K 428-800A.B	Phi	MOS-N-FET-e	VFET, 800/30V, 45W, 160/450ns(2.6A) A: 3.4/14A, $\lt;1.5\Omega(4A)$, B: 3/12A, $\lt;2\Omega(4A)$	16c	SOT-199		2SK809A, 2SK1463, 2SK1684, 2SK1859
K 428-1000A.B	Phi	MOS-N-FET-e	VFET, 1000/30V, 45W, 160/450ns(2.5A) A: 2.9/12A, $\lt;2\Omega(3.5A)$, B: 2.6/10A, $\lt;2.6\Omega(3.5A)$	16c	SOT-199		BUK 426-1000, 2SK1770
K 436-50A.B	Phi	MOS-N-FET-e	=BUK 426-50A.B: A=50/200A, B=46/184A, 125W	18p	TO-3P		BUZ 346, 2SK1297, 2SK1379, 2SK1514
K 436-60A.B	Phi	MOS-N-FET-e	=BUK 426-60A.B: A=50/200A, B=46/184A, 125W	18p	TO-3P		2SK1297, 2SK1379, 2SK1514, 2SK2096
K 436-100A.B	Phi	MOS-N-FET-e	=BUK 426-100A.B: A=33/132A, B=31/124A, 125W	18p	TO-3P		BUZ 345, 2SK850, 2SK906, 2SK1429, ++

Original	Fabric.	Constr.	Info	(Compl. Fig.)	JAEGER	Fig.	International
KSV 3100 ACN.....	Sam	A/D-D/A-IC	8-Bit A/D- + 10-Bit D/A-Converter		40-DIP		
KSV 3110(CN.....)	Sam	A/D-D/A-IC	8 Bit A/D- + 10 Bit D/A-Conv., Video, TTL In/Out		40-DIP		
KSV 3208(CN.....)	Sam	A/D-IC	8 Bit, hi-speed, TV, Video, 20MSPS, TTL In/Out		28-DIP		
KSV 3310	Sam	D/A-IC	10 Bit, TV, Video, 20MHz		28-DIP		
KSV 3404	Sam						
KSY 13	Sie						

Original	Fabric.	Constr.	Info	(Compl. Fig.)	JAEGER	Fig.	International
KT							
KT 208(A...V)	GUS						
KT 209(A...V)	GUS						
KT 814 A.B.G.V	GUS						
KT 815 A.B.G.V	GUS						
KT 816 A.B.G.V	GUS						
KT 817 A.B.G.V	GUS						
KT 818 A.B.G.V	GUS						
KT 819 A.B.G.V	GUS						

Original	Fabric.	Constr.	Info	(Compl. Fig.)	JAEGER	Fig.	International
BU 806	Phi,Sgs,Tix	Si-N-Darl+Di	TV-HA, 400/200V, 8/15A, 60W, sat<1.5V(5A)	17j	TO-220	BU 806	17j
BU 806 AF		Si-N-Darl+Di	=BU 806 Iso	17c			
BU 806 FI	Tho	Si-N-Darl+Di	=BU 806 Iso, 30W	17c	TO-220Iso		
BU 807	Phi,Sgs,Tix	Si-N-Darl+Di	=BU 806: 330/150V	17j	TO-220	BU 806	17j
BU 807 FI	Tho	Si-N-Darl+Di	=BU 807: Iso, 30W	17c			
BU 808 DFI (SGS)	Sgs	Si-N-Darl+Di	=BU 808FI: Integr. Damper-Diode	18c	TO-3P Iso		
BU 808 FI (SGS)	Sgs	Si-N-Darl	CTV-HA, 1400/700V, 5/10A, 50W, hFE>25 sat<1.6V(5A)	18c	TO-3P Iso		
BU 808 (Philips)	Phi	Si-N	3Ph.-Motor Drv, 1500/700V, 12/20A, 160W,sat<1V(9V)	23a	TO-3		BUX 86
BU 810	Sgs	Si-N-Darl+Di	S P, 600/400V, 7/10A, 75W, hFE>325, sat<3V(7A)	17j	TO-220	2SD798	17j
BU 824	Phi	Si-N-Darl+Di	S P, 650/375V, 0.5/1A, 12.5W, hFE>325, $\lt;1/2.5\mu$s	13h	TO-202		2SC35
BU 826	Phi	Si-N-Darl+Di	S P, 800/375V, 6/8A, 125W, $\lt;1.3/2.2\mu$s,sat<2.5V(4A)	18j	TO-3P	BU 826	18j
BU 826 A		Si-N-Darl+Di	=BU 826: 1000/400V	18j	TO-3P		
BU 900	Tho	Si-N-Darl	Tripletton, 650/400V, 8A, 70W, hFE>7000, sat<4V(3A) El. Zündung/Ignition, Z-Diode, P...	17j	TO-220		
BU 902	Aeg	Si-N	S P, TV-SMPD	18j	TO-3P	BU 908	18j
BU 902 F		Si-N	=BU 902			BU 508 AF	16c
BU 903	Aeg Phi	Si-N			TO-3P	BU 903	18j
BU 903 F		Si-N				BU 508 AF	16c
BU 908	Aeg	Si-N				BU 908	18j
BU 908 AF		Si-N				BU 508 AF	16c
BU 910	Sgs					BU 806	17j
BU 911	Sgs					2SD798 ²	17j
BU 912						2SD798 ²	17j
BU 920	Sgs						
BU 920 P							
BU 920 PFI							
BU 920 T							
BU 921	S						
BU 921 P							
BU 921 PFI							
BU 921 T							
BU 921 ZP							
BU 921 ZPFI							
BU 921 ZT							
BU 921 ZTFI							
BU 922							
BU 922 P							
BU 922 PFI							
BU 922 T							
BU 926	Tho						
BU 930	Sgs						
BU 930 P							
BU 930 Z							
BU 930 ZP	Sgs						

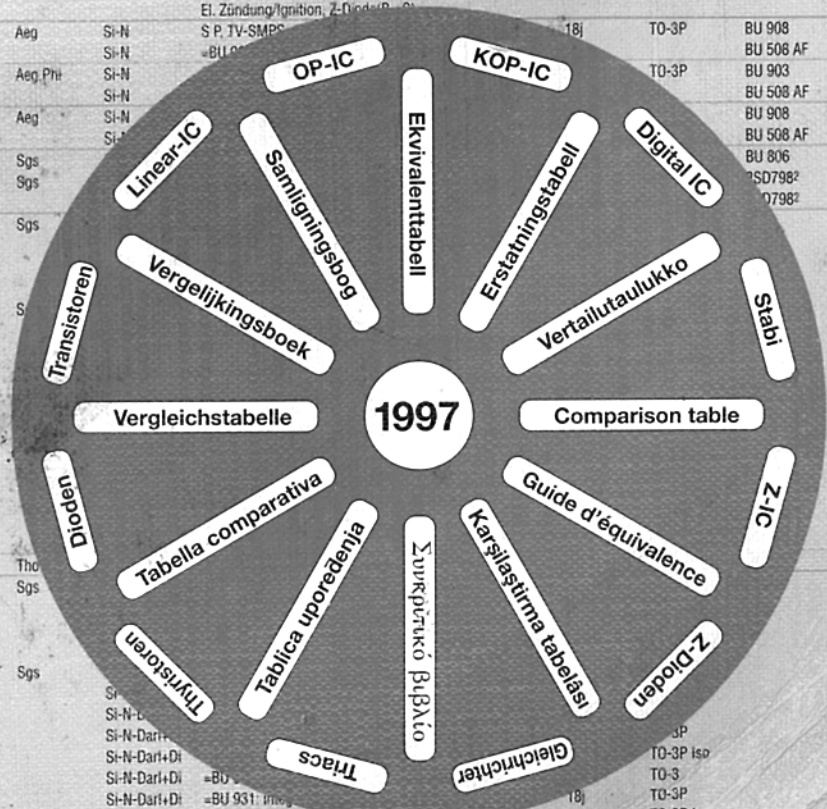

80.000 types

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
BZY 94/C10...75	Phi	Z-Di	10...75V, 5%, 0,4W	31a	DO-7	Z-Diode ...V	31a BZX55/..., BZX79/..., ZPD..., 1N5240...67,++
BZY 95/C10...75	Aeg.Phi	Z-Di	10...75V, 5%, 1,5W	34a	DO-1	Z-Diode ...V	31a BZW22/..., BZX61/..., ZY..., 2N5925...46
BZY 96/C4V7...10	Phi	Z-Di	4,7...10V, 5%, 1,5W	34a	DO-1	Z-Diode ...V	31a BZW22/..., BZX61/..., ZY..., 1N5917...25,++
BZY 97/C3V3...200	Sie,Tho	Z-Di	3,3...200V, 5%, 1,5W	31a	SOD-22	Z-Diode ...V	31a BZW22/..., BZX61/..., ZY..., 1N5913...56,++
BZZ							
BZZ 10	Phi	Z-Di	6,15V, 10%, 0,28W	31a	DO-7	Z-Diode 6,2V	31a BZX55/..., BZX79/..., ZPD..., 1N5233...,++
BZZ 11	Phi	Z-Di	=BZZ 10: 6,55V	31a	DO-7	Z-Diode 6,8V	31a +BZZ 10
BZZ 12	Phi	Z-Di	=BZZ 10: 7,25V	31a	DO-7	Z-Diode 7,5V	31a +BZZ 10
BZZ 13	Phi	Z-Di	=BZZ 10: 8,05V	31a	DO-7	Z-Diode 8,2V	31a +BZZ 10
BZZ 14	Phi	Z-Di	5,6V, 5%, 10W(Tc=50°)	32a	DO-4		BZX 98/C5V6
BZZ 15	Phi	Z-Di	=BZZ 14: 6,2V	32a	DO-4		BZX 98/C6V2
BZZ 16	Phi	Z-Di	=BZZ 14: 6,8V	32a	DO-4		BZX 98/C6V8
BZZ 17	Phi	Z-Di	=BZZ 14: 7,5V	32a	DO-4		BZX 98/C7V5
BZZ 18	Phi	Z-Di	=BZZ 14: 8,2V	32a	DO-4		BZX 98/C8V2
BZZ 19	Phi	Z-Di	=BZZ 14: 9,1V	32a	DO-4		BZX 98/C9V1
BZZ 20	Phi	Z-Di	=BZZ 14: 10V	32a	DO-4		BZX 98/C10
BZZ 21	Phi	Z-Di	=BZZ 14: 11V	32a	DO-4		BZX 98/C11
BZZ 22	Phi	Z-Di	=BZZ 14: 12V	32a	DO-4		BZX 98/C12
BZZ 23	Phi	Z-Di	=BZZ 14: 13V	32a	DO-4		BZX 98/C13
BZZ 24	Phi	Z-Di	=BZZ 14: 15V	32a	DO-4		BZX 98/C15
BZZ 25	Phi	Z-Di	=BZZ 14: 16V	32a	DO-4		BZX 98/C16
BZZ 26	Phi	Z-Di	=BZZ 14: 18V	32a	DO-4		BZX 98/C18
BZZ 27	Phi	Z-Di	=BZZ 14: 20V	32a	DO-4		BZX 98/C20
BZZ 28	Phi	Z-Di	=BZZ 14: 22V	32a	DO-4		BZX 98/C22
BZZ 29	Phi	Z-Di	=BZZ 14: 24V	32a	DO-4		BZX 98/C24
C							
C....	JAP	...-N	*2SC..., z.B./e.g. "C1398"=2SC1398	Japantypen			
C....	Sam	...-N	*KSC..., z.B./e.g. "C1009"=KSC1009	Samsung			
C....	Nec	IC	*µPC..., (NEC !)				
C		N-FET	=2SK1375 (SMD-Marking)	35(2mm)	SOT-323		+2SK1375
C		GaAs-N-FET	=2SK649 (Marking)	51			+2SK649
C		C-Di	=HVR 17 (SMD-Marking)	71(2,7mm)	SOD-123		+HVR 17
C		Si-Di	=MA 2S784 (SMD-Marking)	71(1,7mm)	SOD-323		+MA 784
C 1		Si-Di	=HSM 88(A)S (SMD-Marking)	35	SOT-23		+HSM 88(A)S
C 1		Si-Di	=HSM 88(A)SR(SMD-Marking)	35	SOT-23		+HSM 88(A)SR
C 1		Si-Di	=1SS352 (SMD-Marking)	71(1,7mm)	SOD-323		+1SS352
C 1		Si-Di	=1SS368 (SMD-Marking)	71(1,3mm)			+1SS368
C 1(p)		Si-P	=BCW 29 (SMD-Marking)	35	SOT-23		+BCW 29
C 1		Si-N	=BFS 38A (SMD-Marking)	35(2mm)	SOT-323		+BFS 38A
C 1 G		Si-N	=KSC 1632-G (SMD-Marking)	35	SOT-23		+KSC 1632
C 1 G		Si-N	=HN 1C01F-GR (SMD-Marking)	46	SOT-163		+HN 1C01F
C 1 G		Si-N	=HN 1C01FU-GR (SMD-Marking)	46(2mm)	SOT-363		+HN 1C01FU
C 1 L		Si-N	=KSC 1632-L (SMD-Marking)	35	SOT-23		+KSC 1632
C 1 O		Si-N	=KSC 1632-O (SMD-Marking)	35	SOT-23		+KSC 1632
C 1 Y		Si-N	=KSC 1632-Y (SMD-Marking)	35	SOT-23		+KSC 1632
C 1 Y		Si-N	=HN 1C01F-Y (SMD-Marking)	46	SOT-163		+HN 1C01F
C 1 Y		Si-N	=HN 1C01FU-Y (SMD-Marking)	46(2mm)	SOT-363		+HN 1C01FU
C 2		Si-P	=BFQ 32C (Marking)	51			+BFQ 32C
C 2(p)		Si-P	=BCW 30 (SMD-Marking)	35	SOT-23		+BCW 30
C 2		Si-P	=BFQ 32C (Marking)	51			+BFQ 32C
C 2		Si-N	=BFS 38 (SMD-Marking)	35(2mm)	SOT-323		+BFS 38
C 2		Si-Di	=HSM 276S (SMD-Marking)	35	SOT-23		+HSM 276S
C 3		Si-N	=BFS 39 (SMD-Marking)	35(2mm)	SOT-323		+BFS 39
C 3		Si-P	=MMBT 4126 (SMD-Marking)	35	SOT-23		+MMBT 4126
C 3		Si-Di	=1SS226 (SMD-Marking)	35	SOT-23		+1SS226
C 3		Si-Di	=1SS302 (SMD-Marking)	35(2mm)	SOT-323		+1SS302
C 3		Si-Di	=1SS362 (SMD-Marking)	35(1,6mm)	SS Mini		+1SS362
C 3 A		Si-N	=HN 1C03F-A (SMD-Marking)	46	SOT-163		+HN 1C03F
C 3 B		Si-N	=HN 1C03F-B (SMD-Marking)	46	SOT-163		+HN 1C03F
C 3 T		Si-Di	=1PS226 (SMD-Marking)	35	SOT-23		+1PS226
C 4		Si-P	=2SA811 (SMD-Marking)	35	SOT-23		+2SA811
C 4		Si-P	=BCW 29R (SMD-Marking)	35	SOT-23		+BCW 29R
C 4		Si-P	=BFS 40A (SMD-Marking)	35(2mm)	SOT-323		+BFS 40A
C 4		Si-Di	=HSM 88WK (SMD-Marking)	35	SOT-23		+HSM 88WK
C 4		Si-Di	=MC 804 (SMD-Marking)	35	SOT-23		+MC 804
C 5		Si-P	=2SA811-C5 (SMD-Marking)	35	SOT-23		+2SA811
C 5		Si-P	=BCW 30R (SMD-Marking)	35	SOT-23		+BCW 30R
C 5		Si-P	=BFS 40 (SMD-Marking)	35(2mm)	SOT-323		+BFS 40
C 5		GaAs-N-FET-d	=CFY 25-17 (Marking)	51			+CFY 25
C 5		Si-Di	=HSM 107S (SMD-Marking)	35	SOT-23		+HSM 107S
C 5		Si-P	=MMBA 811C5 (SMD-Marking)	35	SOT-23		+MMBA 811
CF 5R		GaAs-FET	=CF 930R (SMD-Marking)	44	SOT-143		+CF 930R
C 6		Si-P	=2SA811-C6 (SMD-Marking)	35	SOT-23		+2SA811
C 6		Si-P	=BFS 41 (SMD-Marking)	35(2mm)	SOT-323		+BFS 41
C 6		GaAs-N-FET-d	=CFY 25-20 (Marking)	51			+CFY 25
C 6		Si-Di	=HSM 198S (SMD-Marking)	35	SOT-23		+HSM 198S
C 6		Si-P	=MMBA 811C6 (SMD-Marking)	35	SOT-23		+MMBA 811
C 7		Si-P	=2SA811-C7 (SMD-Marking)	35	SOT-23		+2SA811
C 7(p)		Si-P	=BCF 29 (SMD-Marking)	35	SOT-23		+BCF 29
C 7		GaAs-N-FET-d	=CFY 25-23 (Marking)	51			+CFY 25
C 7		Si-Di	=HSM 88WA (SMD-Marking)	35	SOT-23		+HSM 88WA
C 7		Si-P	=MMBA 811C7 (SMD-Marking)	35	SOT-23		+MMBA 811
C 8		Si-P	=2SA811-C8 (SMD-Marking)	35	SOT-23		+2SA811
C 8(p)		Si-P	=BCF 30 (SMD-Marking)	35	SOT-23		+BCF 30
C 8		Si-P	=MMBA 811C8 (SMD-Marking)	35	SOT-23		+MMBA 811
C 9		Si-P	=BCF 30R (SMD-Marking)	35	SOT-23		+BCF 30R
C 10	old	C-Di	=BA 101	31a			+BA 101
C 15	old	C-Di	=BA 102	31a			+BA 102
C 15		Si-P	=2SA1612-C15 (SMD-Marking)	35(2mm)	SOT-323		+2SA1612
C 15		Si-P	=2SA811A-C15(SMD-Marking)	35	SOT-23		+2SA811A
C 16		Si-P	=2SA1612-C16 (SMD-Marking)	35(2mm)	SOT-323		+2SA1612

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
C 16		Si-P	=2SA811A-C16(SMD-Marking)	35	SOT-23		-2SA811A	
C 17		Si-P	=2SA1612-C17 (SMD-Marking)	35(2mm)	SOT-323		-2SA1612	
C 17		Si-P	=2SA811A-C17(SMD-Marking)	35	SOT-23		-2SA811A	
C 18		Si-P	=2SA1612-C18 (SMD-Marking)	35(2mm)	SOT-323		-2SA1612	
C 18		Si-P	=2SA811A-C18(SMD-Marking)	35	SOT-23		-2SA811A	
C 20	old	C-Di	=BA 102	31a			-BA 102	
C 20		N-FET	=2SK595-20 (SMD-Marking)	35	SOT-23		-2SK595	
C 21		N-FET	=2SK595-21 (SMD-Marking)	35	SOT-23		-2SK595	
C 22		N-FET	=2SK595-22 (SMD-Marking)	35	SOT-23		-2SK595	
C 23		N-FET	=2SK595-23 (SMD-Marking)	35	SOT-23		-2SK595	
C 24		N-FET	=2SK595-24 (SMD-Marking)	35	SOT-23		-2SK595	
C 25		Si-P	=2SA1247-C25(SMD-Marking)	35	SOT-23		-2SA1247	
C 26		Si-P	=2SA1247-C26(SMD-Marking)	35	SOT-23		-2SA1247	
C 27		Si-P	=2SA1247-C27(SMD-Marking)	35	SOT-23		-2SA1247	
C 28		Si-P	=2SA1247-C28(SMD-Marking)	35	SOT-23		-2SA1247	
C 71		Si-P	=BCW 61A (SMD-Marking)	35	SOT-23		-BCW 61A	
C 72		Si-P	=BCW 61B (SMD-Marking)	35	SOT-23		-BCW 61B	
C 73		Si-P	=BCW 61C (SMD-Marking)	35	SOT-23		-BCW 61C	
C 74		Si-P	=BCW 61D (SMD-Marking)	35	SOT-23		-BCW 61D	
C 77		Si-P	=BCF 29R (SMD-Marking)	35	SOT-23		-BCF 29R	
C 91		Si-P	=BCV 62 (SMD-Marking)	44	SOT-143		-BCV 62	
C 92		Si-P	=BCV 62A (SMD-Marking)	44	SOT-143		-BCV 62A	
C 93		Si-P	=BCV 62B (SMD-Marking)	44	SOT-143		-BCV 62B	
C 94		Si-P	=BCV 62C (SMD-Marking)	44	SOT-143		-BCV 62C	
C 95		Si-P	=BCV 64 (SMD-Marking)	44	SOT-143		-BCV 64	
C 96		Si-P	=BCV 64B (SMD-Marking)	44	SOT-143		-BCV 64B	
C 106 A	Gen.Mot.Rca	50Hz-Thy	100V, 2.2A(Tc=45°), 4A-, Igt/Ih<0,2/<3mA Mot: Fig. 14e (TO-126)	13e	TO-202	TIC 106 M ⁴	17e	TAG 106A, X 0403B, TAG 108A, C 108A, ++
C 106 B		50Hz-Thy	=C 106A: 200V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106B, X 0403B, TAG 108B, C 108B, ++
C 106 C		50Hz-Thy	=C 106A: 300V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106C, X 0403D, TAG 108C, C 108C, ++
C 106 D		50Hz-Thy	=C 106A: 400V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106D, X 0403D, TAG 108D, C 108D, ++
C 106 E		50Hz-Thy	=C 106A: 500V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106E, X 0403M, TAG 108E, C 108E, ++
C 106 F		50Hz-Thy	=C 106A: 50V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106F, X 0403B, TAG 108F, C 108F, ++
C 106 G		50Hz-Thy	=C 106A: 150V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106G, X 0403B, TAG 108G, C 108G, ++
C 106 H		50Hz-Thy	=C 106A: 600V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106M, X 0403M, TAG 108M, C 108M, ++
C 106 I		50Hz-Thy	=C 106A: 15V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106Q, X 0403B, TAG 108Q, C 108Q, ++
C 106 J		50Hz-Thy	=C 106A: 30V	13e	TO-202	TIC 106 M ⁴	17e	TAG 106Y, X 0403B, TAG 108Y, C 108Y, ++
C 107 A	Gen.Rca	50Hz-Thy	100V, 2A(Tc=45°), 4A-, Igt/Ih<0,5/<3mA	13e	TO-202	TIC 106 M ⁴	17e	TAG 107A, X 0403B, C 108A, TAG 108A, ++
C 107 B		50Hz-Thy	=C 107A: 200V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107B, X 0403B, C 108B, TAG 108B, ++
C 107 C		50Hz-Thy	=C 107A: 300V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107C, X 0403D, C 108C, TAG 108C, ++
C 107 D		50Hz-Thy	=C 107A: 400V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107D, X 0403D, C 108D, TAG 108D, ++
C 107 E		50Hz-Thy	=C 107A: 500V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107E, X 0403M, C 108E, TAG 108E, ++
C 107 F		50Hz-Thy	=C 107A: 50V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107F, X 0403B, C 108F, TAG 108F, ++
C 107 G		50Hz-Thy	=C 107A: 150V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107G, X 0403B, C 108G, TAG 108G, ++
C 107 H		50Hz-Thy	=C 107A: 600V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107M, X 0403M, C 108M, TAG 108M, ++
C 107 I		50Hz-Thy	=C 107A: 15V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107Q, X 0403B, C 108Q, TAG 108Q, ++
C 107 J		50Hz-Thy	=C 107A: 30V	13e	TO-202	TIC 106 M ⁴	17e	TAG 107Y, X 0403B, C 108Y, TAG 108Y, ++
C 108 A	Gen.Rca	50Hz-Thy	100V, 3.3A(Tc=45°), 5A-, Igt/Ih<0,2/<3mA	13e	TO-202	TIC 106 M ⁴	17e	TAG 108A, (TIC 106A, TAG 623-100) ⁴
C 108 B		50Hz-Thy	=C 108A: 200V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108B, (TIC 106B, TAG 623-200) ⁴
C 108 C		50Hz-Thy	=C 108A: 300V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108C, (TIC 106C, TAG 623-300) ⁴
C 108 D		50Hz-Thy	=C 108A: 400V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108D, (TIC 106D, TAG 623-400) ⁴
C 108 E		50Hz-Thy	=C 108A: 500V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108E, (TIC 106E, TAG 623-500) ⁴
C 108 F		50Hz-Thy	=C 108A: 50V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108F, (TIC 106F, TAG 623-100) ⁴
C 108 G		50Hz-Thy	=C 108A: 150V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108G, (TIC 106G, TAG 623-200) ⁴
C 108 H		50Hz-Thy	=C 108A: 600V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108M, (TIC 106M, TAG 623-600) ⁴
C 108 I		50Hz-Thy	=C 108A: 15V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108Q, (TIC 106Q, TAG 623-100) ⁴
C 108 J		50Hz-Thy	=C 108A: 30V	13e	TO-202	TIC 106 M ⁴	17e	TAG 108Y, (TIC 106Y, TAG 623-100) ⁴
C 116 A	Gen	50Hz-Thy	100V, 8A-, Igt/Ih<25/<30mA	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-100, C122A, TIC116A, CS6-02,++) ⁴
C 116 B		50Hz-Thy	=C 116A: 200V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-200, C 122B, TIC116B, CS6-02,++) ⁴
C 116 C		50Hz-Thy	=C 116A: 300V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-300, C 122C, TIC116C, CS6-04,++) ⁴
C 116 D		50Hz-Thy	=C 116A: 400V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-400, C 122D, TIC116D, CS6-04,++) ⁴
C 116 E		50Hz-Thy	=C 116A: 500V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-500, C 122E, TIC116E, CS6-06,++) ⁴
C 116 F		50Hz-Thy	=C 116A: 50V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-100, C 122F, TIC116F, CS6-02,++) ⁴
C 116 G		50Hz-Thy	=C 116A: 600V	13e	TO-202	TAG 626-600 ⁴	17e	(TAG625-600, C 122M, TIC116M, CS6-06,++) ⁴
C 118 A	Gen	50Hz-Thy	100V, 8A-, Igt/Ih<0,2/<6mA	13e	TO-202	TIC 106 M ⁴	17e	(TAG628-100, S 4060A) ⁴
C 118 B		50Hz-Thy	=C 118A: 200V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-200, S 4060B, MCR 72-4) ⁴
C 118 C		50Hz-Thy	=C 118A: 300V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-300, S 4060C, MCR 72-5) ⁴
C 118 D		50Hz-Thy	=C 118A: 400V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-400, S 4060D, MCR 72-6) ⁴
C 118 E		50Hz-Thy	=C 118A: 500V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-500, S 4060E, MCR 72-7) ⁴
C 118 F		50Hz-Thy	=C 118A: 50V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-100, S 4060F, MCR 72-2) ⁴
C 118 G		50Hz-Thy	=C 118A: 600V	13e	TO-202	TIC 106 M ⁴	17e	(TAG 628-600, S 4060M, MCR 72-8) ⁴
C 122 A	Mot.Rca	50Hz-Thy	100V, 5A(Tc=75°), 8A-, Igt/Ih<25/<30mA	17e	TO-220	TAG 626-600	17e	TIC116A, BSIC1026M, CS6-02, TAG660-100++
C 122 B		50Hz-Thy	=C 122A: 200V	17e	TO-220	TAG 626-600	17e	TIC116B, BSIC1026M, CS6-02, TAG660-200++
C 122 C		50Hz-Thy	=C 122A: 300V	17e	TO-220	TAG 626-600	17e	TIC116C, BSIC1026M, CS6-04, TAG660-400++
C 122 D		50Hz-Thy	=C 122A: 400V	17e	TO-220	TAG 626-600	17e	TIC116D, BSIC1026M, CS6-04, TAG660-400++
C 122 E		50Hz-Thy	=C 122A: 500V	17e	TO-220	TAG 626-600	17e	TIC116E, BSIC1033M, CS6-06, TAG660-500++
C 122 F		50Hz-Thy	=C 122A: 50V	17e	TO-220	TAG 626-600	17e	TIC116F, BSIC1026M, CS6-02, TAG660-100++
C 122 G		50Hz-Thy	=C 122A: 600V	17e	TO-220	TAG 626-600	17e	TIC116M, BSIC1040M, CS6-02, TAG660-600++
C 203 A	Gen	F-Thy	100V, 0.8A(Tc=25°), Igt/Ih<0,2/<5mA	7n	TO-92	BRX 49	7a	BRX 46...49, BRX 51...56, BRY55/...S
C 203 B		F-Thy	=C 203A: 200V	7n	TO-92	BRX 49	7a	BRX 47...49, BRX 52...56, BRY55/...S
C 203 C		F-Thy	=C 203A: 300V	7n	TO-92	BRX 49	7a	BRX 48...49, BRX 53...56, BRY55/...S
C 203 D		F-Thy	=C 203A: 400V	7n	TO-92	BRX 49	7a	BRX 49, BRX 54...56, BRY55/...S
C 203 Y		F-Thy	=C 203A: 30V	7n	TO-92	BRX 49	7a	BRX 44...49, BRX 50...56, BRY55/...S
C 203 YY		F-Thy	=C 203A: 60V	7n	TO-92	BRX 49	7a	BRX 45...49, BRX 51...56, BRY55/...S
C 205 A	Gen.Mof	F-Thy	100V, 1.2A-, Igt/Ih<0,2/<5mA	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 61...66) ⁴
C 205 B		F-Thy	=C 205A: 200V	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 62...66) ⁴
C 205 C		F-Thy	=C 205A: 300V	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 63...66) ⁴
C 205 D		F-Thy	=C 205A: 400V	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 64...66) ⁴
C 205 Y		F-Thy	=C 205A: 30V	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 60...66) ⁴
C 205 YY		F-Thy	=C 205A: 60V	7n	TO-92	(TIC 106 M) ⁶	17e	(BRX 61...66) ⁴
C 228 A	Gen.Mot	50Hz-Thy	100V, 35A-, Igt/Ih<40/<75mA	21b	-TO-48			2N3896...3899, MCR3935-3, C35A, TAG35-100
C 228 B		50Hz-Thy	=C 228A: 200V	21b	-TO-48			2N3897...3899, MCR3935-4, C35B, TAG35-200
C 228 C		50Hz-Thy	=C 228A: 300V	21b	-TO-48			2N3898...3899, MCR3935-5, C35C, TAG35-300

Original	Fabric.	Constr.	Info	[Compl. Fig.	JAEGER	Fig.	International
C 228 D		50Hz-Thy	=C 228A: 400V	21b		-TO-48	2N3898...3899, MCR3935-6, C35D, TAG35-400
C 228 E		50Hz-Thy	=C 228A: 500V	21b		-TO-48	2N3899, MCR3935-7, C35E, TAG35-500
C 228 F		50Hz-Thy	=C 228A: 50V	21b		-TO-48	2N3896...3899, MCR3935-2, C35F, TAG35-100
C 228 M		50Hz-Thy	=C 228A: 600V	21b		-TO-48	2N3899, MCR3935-8, C35M, TAG35-600
C 228 U		50Hz-Thy	=C 228A: 25V	21b		-TO-48	2N3896...3899, MCR3935-1, C35U, TAG35-100
C 228 A...U 3		50Hz-Thy	=C228 A...U:	54b		-TO-48	-
C 229 A...U	Gen.Mot	50Hz-Thy	=C228 A...U:	29b		TO-203	2N3870...3873, MCR3835..., MCR63...
C 230 A	Gen.Mot	50Hz-Thy	100V, 25A...; Igt/Ih<25/<50mA	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 B		50Hz-Thy	=C 230A: 200V	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 C		50Hz-Thy	=C 230A: 300V	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 D		50Hz-Thy	=C 230A: 400V	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 E		50Hz-Thy	=C 230A: 500V	21b		-TO-48	BSIE4133N, BSIE4133MN
C 230 F		50Hz-Thy	=C 230A: 50V	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 M		50Hz-Thy	=C 230A: 600V	21b		-TO-48	BSIE4140N, BSIE4140MN
C 230 U		50Hz-Thy	=C 230A: 25V	21b		-TO-48	BSIE4126N, BSIE4126MN
C 230 A...U 3		50Hz-Thy	=C230 A...U:	54b		-TO-48	-
C 231 A...U	Gen.Mot	50Hz-Thy	=C230 A...U: Igt/Ih<9/<50mA	21b		-TO-48	-
C 231 A...U 3		50Hz-Thy	=C230 A...U: Igt/Ih<9/<50mA	54b		-TO-48	-
C 232 A...U	Gen.Mot	50Hz-Thy	=C230 A...U:	29b		TO-203	BSIE40...N, BSIE40...MN
C 233 A...U	Gen.Mot	50Hz-Thy	=C231 A...U:	29b		TO-203	-
C 500 D	Hfo	LIN-IC	Analogprocessor f. A/D-Converter, 14 Bit	18-DIP			TL 500C
C 501 D	Hfo	LIN-IC	Analogprocessor f. A/D-Converter, 11 Bit	18-DIP			TL 501C
C 502 D	Hfo	LIN-IC	Digitalprocessor, 4,5-Digit Display Driver	20-DIP			TL 502C
C 504 D	Hfo	LIN-IC	Digitalprocessor, 3,5/4,5-Digit Display Driver	28-DIP			-
C 520 D	Hfo	A/D-IC	3-Digit A/D-Converter, Dual-Slope	16-DIP			AD 2020
C 560 D	Hfo	D/A-IC	8-Bit D/A-Converter	16-DIC			(AD 558 JD)
C 565 D	Hfo	D/A-IC	12-Bit D/A-Converter, -C 5650D	24-DIC			AD 565 JN, µA 565...
C 570 D	Hfo	A/D-IC	8-Bit A/D-Converter	18-DIC			AD 570
C 571 D	Hfo	A/D-IC	10-Bit A/D-Converter	18-DIC			AD 571, µA 571...
C 574 C	Hfo	A/D-IC	12-Bit A/D-Converter, µP-Interface	28-DIP			-
C 670 C,CGn	Hfo	A/D-IC	8-Bit A/D-Converter	18-DIC			-
C 1398		Si-N	=BC 237		BC 546	7a	-BC 237
C 1406(G)		Si-Br	Br Rr, 100V, 3,2...4,8A	33	B80C5000	31a	B40C3700/2200, etc
(SSI) C 1710	Sie	Si-Di	-SSI C 1710	27c			BY 255
(SSI) C 1720	Sie	Si-Di	-SSI C 1720	27c			BY 255
(SSI) C 1740	Sie	Si-Di	-SSI C 1740	27c			BY 255
(SSI) C 1760	Sie	Si-Di	-SSI C 1760	27c			BY 255
(SSI) C 1780	Sie	Si-Di	-SSI C 1780	27c			BY 255
(SSI) C 2620	Sie	Si-Di	-SSI C 2620	31a			RGP 30 M
(SSI) C 2630	Sie	Si-Di	-SSI C 2630	31a			RGP 30 M
C 4160		Si-N	=BC 237	7e	BC 546	7a	-BC 237
(SSI) C 4610	Sie	Si-Di	-SSI C 4610		RGP 30 M	31a	
(SSI) C 4620	Sie	Si-Di	-SSI C 4620		RGP 30 M	31a	
C 5650 D	Hfo	D/A-IC	10-Bit D/A-Converter, -C 5650D	24-DIC			-
C 5658 D	Hfo	D/A-IC	8-Bit D/A-Converter	24-DIP			-
C 7136 D	Hfo	A/D-IC	3,5-Digit A/D-Converter	40-DIP			ICL 7136
CA							
CA		Si-N	=2SC3645 (SMD-Marking)	39	SOT-89		-2SC3645
CA		Si-N	=2SD1368-CA (SMD-Marking)	39	SOT-89		-2SD1368
CA		C-Di	=BB 510 (SMD-Marking)	35	SOT-23		-BB 510
CA		Si-N	=BCP 68 (SMD-Marking)	-39°	SOT-223		-BCP 68
CA		Si-P	=BCW 61RA (SMD-Marking)	35	SOT-23		-BCW 61RA
CA		Si-N	=BCX 68 (SMD-Marking)	39	SOT-89		-BCX 68
CA		Si-N	=BFS 18 (SMD-Marking)	35	SOT-23		-BFS 18
CA		Si-N/P+R	=XN 4314 (SMD-Marking)	46	SOT-363		-XN 4314
CA		Si-N/P+R	=XP 4314 (SMD-Marking)	46(2mm)	SOT-363		-XP 4314
CA		MOS-P-FET-e	=µPA503T (SMD-Marking)	45	SOT-153		-µPA503T
CA 080(A,B)E	Rca	BiMOS-OP-IC	=CA 080...S.T. Fig. *		8-DIP		TL 080...
CA 080(A,B,C)S,T	Rca	BiMOS-OP-IC	MOS In/Out, ±18V, InOffset=<15...<3mV(A,B,C)		TO-99		TL 080...
CA 081(A,B)E	Rca	BiMOS-OP-IC	=CA 081...S.T. Fig. *		8-DIP		TL 081...
CA 081(A,B,C)S,T	Rca	BiMOS-OP-IC	MOS In/Out, ±18V, InOffset=<15...<3mV(A,B,C)		TO-99		TL 081...
CA 082(A,B)E	Rca	BiMOS-OP-IC	=CA 082...S.T. Fig. *		8-DIP		TL 082...
CA 082(A,B,C)S,T	Rca	BiMOS-OP-IC	Dual, MOS In/Out, ±18V, InOffset=<15...<3mV(A,B,C)		TO-99		TL 082...
CA 083(A,B)E	Rca	BiMOS-OP-IC	Dual, MOS In/Out, ±18V, InOffset=<15...<3mV(A,B)		14-DIP		TL 083...
CA 084(A,B)E	Rca	BiMOS-OP-IC	Quad, MOS In/Out, ±18V, InOffset=<15...<3mV(A,B)		14-DIP		TL 087...
CA 101 (A)E,G	Rca	OP-IC	Uni, Serie 101, ±22V, -55...+125°, A=10V/µs		8-DIP,DIC		... 101...
CA 101 (A)S,T	Rca	OP-IC	=CA 101E,G, Fig. *		TO-99		... 101...
CA 107 E,G	Rca	OP-IC	Uni, Serie 107, ±22V, -55...+125°		8-DIP,DIC		... 107...
CA 107 S,T	Rca	OP-IC	=CA 107...: Fig. *		TO-99		... 107...
CA 108(A)S,T	Rca	OP-IC	Uni, Serie 108, ±20V, -55...+125°, Offs=0,7(A=0,3)mV		TO-99		... 108...
CA 111 E,G	Rca	KOP-IC	Uni, Serie 111, ±18V, -55...+125°		8-DIP,DIC		... 111...
CA 111 S,T	Rca	KOP-IC	=CA 111E,G, Fig. *		TO-99		... 111...
CA 124 E,G	Rca	OP-IC	Quad, Serie 124, ±16V, -55...+125°		14-DIP,DIC		... 124...
CA 139(A)E,G	Rca	KOP-IC	Quad, Serie 139, ±18V, -55...+125°, Offs<5mV(A<2mV)		14-DIP,DIC		... 139...
CA 158(A)E,G	Rca	OP-IC	Dual, Serie 158, ±16V, -55...+125°, A=Impdv. Vers.		8-DIP,DIC		... 158... 1558... 2904...
CA 158(A)S,T	Rca	OP-IC	=CA 158E,G: -25...+85°		TO-99		... 158... 1558...
CA 201 (A)E,G	Rca	OP-IC	=CA 101...: -25...+85°		8-DIP,DIC		... 101... 201...
CA 201 (A)S,T	Rca	OP-IC	=CA 101...: -25...+85°		TO-99		... 101... 201...
CA 207 E,G	Rca	OP-IC	=CA 107...: -25...+85°		8-DIP,DIC		... 107... 207...
CA 207 S,T	Rca	OP-IC	=CA 107...: -25...+85°		TO-99		... 107... 207...
CA 208 (A)S,T	Rca	OP-IC	=CA 108...: -25...+85°		TO-99		... 108... 208...
CA 211 E,G	Rca	KOP-IC	=CA 111...: -25...+85°		8-DIP,DIC		... 111... 211...
CA 211 S,T	Rca	KOP-IC	=CA 111...: -25...+85°		TO-99		... 111... 211...
CA 224 E,G	Rca	OP-IC	=CA 124...: -25...+85°		14-DIP,DIC	(LM 324 N) ¹⁶	... 124... 224...
CA 239(A)E,G	Rca	KOP-IC	=CA 139...: -25...+85°		14-DIP	(LM 339 N) ¹⁶	... 139... 239...
CA 258 E,G	Rca	OP-IC	=CA 158...: -25...+85°		8-DIP,DIC	(4558/8-D) ¹⁶	... 158... 258... 1558... 2904...
CA 258 S,T	Rca	OP-IC	=CA 158...: -25...+85°		TO-99		... 158... 258... 1558...
CA 270	Rca	LIN-IC	TV, Sync. Dem., Video-Verst./Amp., AGC(+), Ucc=12V		16-QIP		TCA 270 S
CA 301 AS,AT	Rca	OP-IC	=CA 101...: 0...+70°		TO-99		... 101... 201... 301...
CA 301 (A)E,G	Rca	OP-IC	=CA 101...: 0...+70°		8-DIP,DIC		... 101... 201... 301...
CA 307 E,G	Rca	OP-IC	=CA 107...: 0...+70°		8-DIP,DIC		... 107... 207... 307...
CA 307 S,T	Rca	OP-IC	=CA 107...: 0...+70°		TO-99		... 107... 207... 307...

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
CA 308 E	Rca	OP-IC	=CA 108... 0...+70°	8-DIP			... 108... 208... 308...	
CA 308(A)S.T	Rca	OP-IC	=CA 108... 0...+70°	TO-99			... 108... 208... 308...	
CA 311 E.G	Rca	KOP-IC	=CA 111... 0...+70°	8-DIP,DIC			... 111... 211... 311...	
CA 311 S.T	Rca	KOP-IC	=CA 111... 0...+70°	TO-99			... 111... 211... 311...	
CA 324 E.G	Rca	OP-IC	=CA 124... 0...+70°	14-DIP,DIC	LM 324 N	14-DIP	... 124... 224... 324...	
CA 339(A)E.G	Rca	KOP-IC	=CA 139... 0...+70°	14-DIP	LM 339 N	14-DIP	... 139... 239... 339...	
CA 358 E.G	Rca	OP-IC	=CA 158... 0...+70°	8-DIP,DIC	4558/8D	8-DIP	... 158... 258... 358... 1458...	
CA 358 S.T	Rca	OP-IC	=CA 158... 0...+70°	TO-99			... 158... 258... 358... 1458...	
CA 555(C)E	Rca	LIN-IC	Timer, Ucc=4.5... 18V, Iout=0,2A	8-DIP	NE 555 N	8-DIP	*NE 555N	
CA 555 S.T	Rca	LIN-IC	=CA 555(C)E Fig. *	TO-99			*NE 555N	
CA 723(C)E	Rca	Z-IC	+2...37V, 0,15A, -55...+125°	14-DIP	723/14-D	14-DIP	... 723...	
CA 723(C)T	Rca	Z-IC	=CA 723(C)E Fig. *	TO-100	723/TO	TO-100	... 723...	
CA 741 E.F.G.M	Rca	OP-IC	Uni, Serie 741, ±22V, -55...+125°	8-DIP,DIC			... 741...	
CA 741 S.T	Rca	OP-IC	=CA 741E.F.G.# Fig. *	TO-99			... 741...	
CA 741 CE.CF.CG.M	Rca	OP-IC	=CA 741E.F.G.M: ±18V, 0...+70°	8-DIP,DIC	741/8-D	8-DIP	... 741C...	
CA 741 CS.CT	Rca	OP-IC	=CA 741E.F.G.M: ±18V, 0...+70°	TO-99	741/TO	TO-99	... 741C...	
CA 747 E.F.G	Rca	OP-IC	Dual, Serie 747, ±22V, -55...+125°	14-DIP,DIC			... 747...	
CA 747 T	Rca	OP-IC	=CA 747E.F.G. Fig. *	TO-100			... 747...	
CA 747 CE.CF.CG	Rca	OP-IC	=CA 747E.F.G: ±18V, 0...+70°	14-DIP,DIC	747/14-D	14-DIP	... 747C...	
CA 747 CT	Rca	OP-IC	=CA 747E.F.G: ±18V, 0...+70°	TO-100			... 747C...	
CA 748 E.F.G	Rca	OP-IC	Uni, Serie 748, ±22V, -55...+125°	8-DIP,DIC			... 748...	
CA 748 S.T	Rca	OP-IC	=CA 748E.F.G. Fig. *	TO-99			... 748...	
CA 748 CE.CF.CG	Rca	OP-IC	=CA 748E.F.G: ±18V, 0...+70°	8-DIP,DIC	748/8-D	8-DIP	... 748C...	
CA 748 CT	Rca	OP-IC	=CA 748E.F.G: ±18V, 0...+70°	TO-99	748/TO	TO-99	... 748C...	
CA 758(E)	Rca	LIN-IC	PLL FM MPX Stereo-Decoder, Ucc=10...16V	16-DIP	(TCA 4500 A)	16-DIP	LM 1800, MC 1311, ULX 2244, µA 758 C	
CA 920(A)E	Rca	LIN-IC	TV, HA Sync., HA-Os	16-DIP	TBA 920 S	16-DIP	TBA 920 S	
CA 1190(Q)	Rca	LIN-IC	TV, Sound IF, LF Out	12-DIP+b	TDA 3190	16-DIP	TDA 1190, TDA 3190	
CA 1191(E)	Rca	LIN-IC	TV, Sound IF, LF Out	16-DIP	TDA 3190	16-DIP	TDA 1190, TDA 3190	
CA 1310(A)E	Rca	LIN-IC	PLL FM MPX Stereo-Decoder, Ucc=8...16V	14-DIP			A 2900, LM 1310, MC 1310, SN 76115	
CA 1352	Rca	LIN-IC	TV, Video(pos./neg.) IF, AGC(neg.)	14-DIP			MC 1352	
CA 1391 E	Rca	LIN-IC	TV, HA Sync. Processor, pos. Signal Input	8-DIP			MC 1391	
CA 1394 E	Rca	LIN-IC	=CA 1391: neg. Signal Input	8-DIP			MC 1394	
CA 1398 E	Rca	LIN-IC	CTV, Chroma Processor	14-DIP			-	
CA 1458 E.G.M	Rca	OP-IC	Dual, Serie 158, ±18V, 0...+70°	8-DIP,DIC	4558/8-D	8-DIP	... 158... 1458... 1558... 4558...	
CA 1458 S.T	Rca	OP-IC	=CA 1458E.G.M Fig. *	TO-99	4558/8-D	8-DIP	... 158... 1458... 1558... 4558...	
CA 1524(E)	Rca	LIN-IC	SMPS/PWM Controller, 100mA, -25...+125°	16-DIP			*SG 1524	
CA 1558 E.G.M	Rca	OP-IC	Dual, Serie 158, ±22V, -55...+125°	8-DIP,DIC			... 158... 1558...	
CA 1558 S.T	Rca	OP-IC	=CA 1558E.G.M Fig. *	TO-99			... 158... 1558...	
CA 1724	Rca	Si-N	4x NPN Trans., 40V, 1A, 38/185ns, Usat<0.5V(0.5A)	14-DIP			DH 3724, FPQ 3724, MPQ 3724, SP 3724	
CA 1725	Rca	Si-N	=CA 1724: 50V	14-DIP			DH 3725, FPQ 3725, MPQ 3725, SP 3725	
CA 2002	Rca	LIN-IC	LF Out, 28V, 3.5A, 8W(14.4V/2Ω)	17/5Pin	TO-220/5V	TDA 2003	17/5Pin	TDA 2002 V
CA 2002 M	Rca	LIN-IC	=CA 2002:	17/5Pin	TO-220/5H	TDA 2003	17/5Pin	TDA 2002 H
CA 2004	Rca	LIN-IC	LF Out, 28V, 3.5A, 12W(24V/4Ω)	17/5Pin	TO-220/5			-
CA 2004 M	Rca	LIN-IC	=CA 2004:	17/5Pin	TO-220/5			-
CA 2111(A)E	Rca	LIN-IC	TV, FM Sound IF, Quadratur Detector	14-DIP			LM 2111, MC 1357(P), ULN 2111(A)	
CA 2111(A)Q	Rca	LIN-IC	=CA 2111(A)E:	14-DIP			LM 2111, MC 1357(P), ULN 2111(A)	
CA 2136 A	Rca	LIN-IC	FM/TV, Sound IF, Quadratur Detector	14-DIP			LM 1841, ULN 2136A	
CA 2524(E)	Rca	LIN-IC	=CA 1524: -40...+85°	16-DIP			*SG 2524	
CA 2904 E.G	Rca	OP-IC	Dual, Serie 158, ±13V, -55...+125°	8-DIP			... 158... 1558... 2904...	
CA 3000	Rca	LIN-IC	Diff.-Verst./DC Amp., ±6V, -55...+125°	TO-100			-	
CA 3001	Rca	LIN-IC	Video-, Breitband-/Wideband/Verst./Amplifier, ±6V	TO-101			HA 1110	
CA 3002	Rca	LIN-IC	IF-, Video-Verst./Amp., ±8V, -55...+125°	TO-100			-	
CA 3004	Rca	LIN-IC	HF-Verst./RF Amp., ±6V, -55...+125°	TO-101			-	
CA 3005	Rca	LIN-IC	HF-Verst./RF Amp., ±6V, -55...+125°	TO-101			-	
CA 3006	Rca	LIN-IC	HF-Verst./RF Amp., ±6V, -55...+125°	TO-101			-	
CA 3007	Rca	LIN-IC	Audio-Verst./Amp., ±6V, -55...+125°	TO-101			-	
CA 3008(A)	Rca	OP-IC	=CA 3029(A): -55...+125°	14-FLP			-	
CA 3010(A)	Rca	OP-IC	=CA 3029(A): -55...+125°	TO-101			-	
CA 3011	Rca	LIN-IC	TV/CATV, Breitbandverst./Wideband Amp., ...20MHz	TO-100			LM 3011	
CA 3012	Rca	LIN-IC	TV/CATV, Breitbandverst./Wideband Amp., ...20MHz	TO-100			-	
CA 3013	Rca	LIN-IC	TV/CATV, Breitbandverst./Wideband Amp., ...20MHz	TO-100			-	
CA 3014	Rca	LIN-IC	TV/CATV, Breitbandverst./Wideband Amp., ...20MHz	TO-100			-	
CA 3015(A)	Rca	OP-IC	=CA 3030(A): -55...+125°	TO-101			-	
CA 3016(A)	Rca	OP-IC	=CA 3030(A): -55...+125°	14-FLP			-	
CA 3018	Rca	Si-N	2x NPN + 1x NPN Darl. Trans., 20V, 0.05A, >300MHz	TO-101			-	
CA 3018 A	Rca	Si-N	=CA 3018: 30V	TO-101			-	
CA 3019	Rca	LIN-IC	6-Di-Array(2xDi + 1xDi-Br), S, 25mA, 1.8pF(2V)	TO-100			-	
CA 3020	Rca	LIN-IC	Breitband-/Wideband Amp., PQ=0.5W(9V)	TO-101			-	
CA 3020 A	Rca	LIN-IC	=CA 3020: PQ=1W(12V)	TO-101			-	
CA 3021	Rca	OP-IC	Wideband, Video, AM/FM IF, 2.4MHz, +18V, -55...+125°	TO-101			CA 3022, CA 2023	
CA 3022	Rca	OP-IC	Wideband, Video, AM/FM IF, 7.5MHz, +18V, -55...+125°	TO-101			CA 3023	
CA 3023	Rca	OP-IC	Wideband, Video, AM/FM IF, 16MHz, +18V, -55...+125°	TO-101			-	
CA 3026	Rca	LIN-IC	=CA 3054: Fig. *	TO-101			-	
CA 3028 AF,BF	Rca	LIN-IC	Diff.-Verst./Amp., ...120MHz, -55...125°	8-DIC			-	
CA 3028 S.T	Rca	LIN-IC	=CA 3028AF,BF: Fig. *	TO-99			-	
CA 3029(A)	Rca	OP-IC	Uni, ±10V, 0...+70°, A=verbess./improved Version	14-DIP			CA 3037	
CA 3030(A)	Rca	OP-IC	Uni, ±20V, 0...+70°, A=verbess./improved Version	14-DIP			CA 3038	
CA 3031	Rca	OP-IC	Uni, Serie 712, +14/-7V, -55...+125°	TO-99			... 702... MC 1712...	
CA 3032	Rca	OP-IC	=CA 3031: 0...+70°	TO-99			... 702... MC 1712...	
CA 3033(A)	Rca	OP-IC	Uni, ±13V, -55...+125°, A=verbess./improved Version	14-DIP			-	
CA 3035(V1)	Rca	LIN-IC	Breitb./Wideb. Amp., 129dB(40kHz), V1=Formed Leads	TO-100			-	
CA 3036	Rca	Si-N	2x Darl.-Trans., 30V, 0.05A, >150MHz, hFE>1000	TO-100			-	
CA 3037(A)	Rca	OP-IC	=CA 3029(A): -55...+125°	14-DIC			-	
CA 3038(A)	Rca	OP-IC	=CA 3030(A): -55...+125°	14-DIC			-	
CA 3039	Rca	LIN-IC	6-Di-Array, S, 5V, 25mA, 1ns, 0.65pF(2V)	TO-101			-	
CA 3040	Rca	LIN-IC	Video-, Breitband-/Wideband/Verst./Amp., ...200MHz	TO-101			-	
CA 3041	Rca	LIN-IC	FM/TV, Sound IF, Dem., LF Amp. f. Röhren-/Tube Out	14-QIP			-	
CA 3042	Rca	LIN-IC	FM/TV, Sound IF, Dem., LF Amp. f. Transistor Out	14-QIP			-	
CA 3045(F)	Rca	LIN-IC	5x NPN Trans., 20/15V, 0.05A, ...120MHz, -55...+125°	14-DIC			HA 1127, LM 4045	
CA 3046	Rca	LIN-IC	=CA 3045: -40...+85°	14-DIP			LM 3046, TBA 331, µA 3046	
CA 3047(A)	Rca	OP-IC	Uni, ±13V, 0...+70°	14-DIP			-	
CA 3048	Rca	LIN-IC	Quad, Uni AC Verst./Amp., 16V, 300kHz	16-DIP			-	
CA 3049 T	Rca	LIN-IC	=CA 3102E: Fig. *	TO-101			-	

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
CA 3050	Rca	LIN-IC	Dual Diff.-Verst./Amp., 20V, 0,05A, -55...+125°				-
CA 3051	Rca	LIN-IC	=CA 3050: -40...+85°				-
CA 3052	Rca	LIN-IC	Quad, Uni AC Verst./Amp., LF In, +16V, 300kHz				-
CA 3053 F	Rca	LIN-IC	Diff.-Verst./Amp., ...120MHz, -55...+125°				-
CA 3053 S,T	Rca	LIN-IC	=CA 3053F: Fig. →				-
CA 3054	Rca	LIN-IC	Dual, Breitband/Wideband Diff. Amp., ...120MHz				TBA 341
CA 3058	Rca	LIN-IC	Nullspg.-/Zero-Voltage Sw. f. 50/60/400Hz Thy Ctrl				-
CA 3059	Rca	LIN-IC	Nullspg.-/Zero-Voltage Sw. f. 50/60/400Hz Thy Ctrl				-
CA 3060 AD,BD	Rca	OP-IC	=CA 3060D: ±18V				-
CA 3060 D	Rca	OP-IC	3x Transconductance OP (OTA), ±7V, -55...+125°				-
CA 3060 E	Rca	OP-IC	=CA 3060D: ±18V, -40...+85°				-
CA 3064	Rca	LIN-IC	TV, Autom. Feinabstimmung/Fine Tuning				-
CA 3064 E	Rca	LIN-IC	=CA 3064: Fig. →				-
CA 3065(E)	Rca	LIN-IC	TV Sound IF, FM IF, Dem, LF Drv				AN 241, HA 1125, KA 2101, LA 1365, LM 3065, MC 1358, TA 7176, ULN 2165
CA 3068	Rca	LIN-IC	TV, Video IF, Sound IF, Video Amp., AGC				-
CA 3070	Rca	LIN-IC	CTV, Chroma-System, VCO, Hue Control				-
CA 3071	Rca	LIN-IC	CTV, Chroma-System, Chroma Verst./Amp.				-
CA 3072	Rca	LIN-IC	CTV, Chroma-System, Color Matrix				-
CA 3075	Rca	LIN-IC	HiFi, FM IF Limiter, Demodulator, LF Preamp.				LM 3075
CA 3076	Rca	LIN-IC	Breitband/Wideband FM IF Limiter				-
CA 3078 A(E,S,T)	Rca	OP-IC	=CA 3078E: ±18V, -55...+125°				-
CA 3078 E	Rca	OP-IC	Uni, lo-power, ±7V, 0...+70°			8-DIP	-
CA 3078 S,T	Rca	OP-IC	=CA 3078(A)E: Fig. →			TO-99	-
CA 3079	Rca	LIN-IC	Nullspg.-/Zero-Voltage Sw. f. 50/60/400Hz Thy Ctrl				-
CA 3080(S)	Rca	OP-IC	=CA 3080E: Fig. →			TO-99	-
CA 3080 A, AS	Rca	OP-IC	=CA 3080E: -55...+125°				-
CA 3080 E	Rca	OP-IC	Transconductance OP(OTA), ±18V, 75V/μs, 0...+70°			8-DIP	-
CA 3081(F)	Rca	LIN-IC	7xNPN Trans.-Array, Common Emit., 20V, 0,1A, 0,75W			16-DIP,DIC	-
CA 3082(F)	Rca	LIN-IC	7xNPN Trans.-Array, Common Coll., 20V, 0,1A, 0,75W			16-DIP,DIC	-
CA 3083	Rca	LIN-IC	5x NPN Trans. Array, 20/15V, 0,1A, 450MHz				MB 5331
CA 3084(E)	Rca	LIN-IC	PNP-Trans.-Array, 40V, 10mA				-
CA 3085(S)	Rca	Z-IC	1,8...26V, 12mA, -55...+125°			TO-99	-
CA 3085 A(S)	Rca	Z-IC	=CA 3085(S): 1,7...36V, 100mA			TO-99	-
CA 3085 B(S)	Rca	Z-IC	=CA 3085(S): 1,7...46V, 100mA			TO-99	-
CA 3085(A,B)E,F	Rca	Z-IC	=CA 3085(A,B)(S): Fig. →			8-DIP,DIC	-
CA 3086(F)	Rca	LIN-IC	5xNPN Trans. Array, 20/15V, 0,05A, 550MHz, F-Keram			14-DIP,DIC	LM 3086, TBA 331, μA 3086
CA 3088 E	Rca	LIN-IC	AM Radio, Ucc=6...16V				-
CA 3089(E,N)	Rca	LIN-IC	TV, Sound IF, FM IF, AGC, AFC				LM 3089, TCA 3089, TDA 1200(A)
CA 3090(A)	Rca	LIN-IC	FM MPX Stereo-Decoder, Ucc=10...16V				-
CA 3090 (A)Q	Rca	LIN-IC	=CA 3090(A)				-
CA 3091 D	Rca	LIN-IC	4-Quadrant Multiplier, 18V, -55...+125°				-
CA 3093 E	Rca	LIN-IC	3x NPN-Trans., 2x Z-Diode, 1x Diode				-
CA 3094 AE	Rca	OP-IC	=CA 3094E: ±18V			8-DIP	-
CA 3094 BE	Rca	OP-IC	=CA 3094E: ±22V			8-DIP	-
CA 3094 E	Rca	OP-IC	S, hi-power, progr., ±12V, -55...+125°			8-DIP	-
CA 3094 S,T	Rca	OP-IC	=CA 3094(A,B)E: Fig. →			TO-99	-
CA 3096 AE,E	Rca	LIN-IC	3x NPN(45/35V)/-2x PNP(40/40V)-Trans., AE=Uusat				-
CA 3096 CE	Rca	LIN-IC	=CA 3096AE: E: 24/24V				-
CA 3097 E	Rca	LIN-IC	Thyristor/PUT/NPN-/PNP-Trans.-Array				-
CA 3098 E	Rca	KOP-IC	Dual Input Schmitt Trigger, progr, 16V, -55...+125°			8-DIP	-
CA 3098 S,T	Rca	KOP-IC	=CA 3098E: Fig. →			TO-99	-
CA 3099 E	Rca	KOP-IC	progr., Flip-Flop Memory, 16V, -55...+125°			14-DIP	-
CA 3100 E	Rca	OP-IC	Wideband, Video, hi-speed, 38MHz, +18V, -40...+85°			8-DIP	-
CA 3100 S,T	Rca	OP-IC	=CA 3100E: -55...+125°			TO-99	-
CA 3102 E	Rca	LIN-IC	Dual, Breitband/Wideband Diff. Amp., ...500MHz				-
CA 3105(M)	Rca	OP-IC	Power-OP, 28V, 3,5A, 15W, 0...+125°, M=Horiz. Mount			17/5Pin	TO-220/5
CA 3118 AT	Rca	LIN-IC	=CA 3118T: 50/40V				TO-101
CA 3118 T	Rca	LIN-IC	4x NPN Trans. Array, 40/30V, 0,05A, >300MHz				TO-101
CA 3120 E	Rca	LIN-IC	TV, Signal Processor				-
CA 3121 E	Rca	LIN-IC	CTV, Chroma-Verst./Amp., Chroma Demodulator				-
CA 3123 E	Rca	LIN-IC	AM Radio, Ucc=9V				-
CA 3125 E	Rca	LIN-IC	CTV, Chroma Demodulator				-
CA 3126 Q	Rca	LIN-IC	CTV, Chroma Processor				-
CA 3127 E	Rca	LIN-IC	5x NPN-Trans.-Array, VHF, 20/15V, 20mA, >1GHz				-
CA 3128 Q	Rca	LIN-IC	CTV, PAL Chroma Processor				-
CA 3130(A,B)E	Rca	BIMOS-OP-IC	MOS In/Out, +16V, -55...+125°, InOffs<15(A<5, B<2mV)				8-DIP
CA 3130(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3130(A,B)E: Fig. →				TO-99
CA 3134 EM	Rca	LIN-IC	TV Sound IF, Dem, LF Out, 5W(30V/16Ω)				16-DIP+d
CA 3134 QM	Rca	LIN-IC	=CA 3134EM:				16-QIP+d
CA 3135 E	Rca	LIN-IC	CTV, Luminance Processor				-
CA 3136 P	Rca	LIN-IC	CTV, Video PLL Synchron Demodulator				16-DIP+c
CA 3137 E	Rca	LIN-IC	CTV, Chroma Demodulator				-
CA 3138 AE	Rca	Si-N	=CA 3138: 25V				14-DIP
CA 3138 E	Rca	Si-N	4x NPN Trans., 20V, 1A, 106/857ns, Usat<0,4V(0,5A)				14-DIP
CA 3139 E	Rca	LIN-IC	TV, Autom. Feinabstimmung/Fine Tuning				-
CA 3139 Q	Rca	LIN-IC	=CA 3139E: Fig. →				14-QIP
CA 3140(A,B)E	Rca	BIMOS-OP-IC	MOS In, ±18(B=±22)V, -55...+125°, Offs<15(A<5, B<2mV)				8-DIP
CA 3140(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3140(A,B)E: Fig. →				TO-99
CA 3141 E	Rca	LIN-IC	10-Di-Array, 30V, 25mA, 50ns(2mA), UF<1V(1mA)				16-DIP
CA 3142 E	Rca	LIN-IC	TV, Signal Processor				-
CA 3143 E	Rca	LIN-IC	CTV, Luminance Processor				-
CA 3144 E	Rca	LIN-IC	CTV, Luminance Processor				-
CA 3145 E	Rca	LIN-IC	CTV, Chroma-Verst./Amp., Chroma Demodulator				-
CA 3146 AE	Rca	LIN-IC	=CA 3146E: 50/40V				-
CA 3146 E	Rca	LIN-IC	5x NPN-Trans.-Array, 40/30V, 0,05A, >300MHz				-
CA 3151 E	Rca	LIN-IC	CTV, Chroma Processor, Demodulator				-
CA 3152 E	Rca	BIMOS-OP-IC	MOS In, TV Tuning Band Select, 4xKOP, 18V, 0...+70°				-
CA 3153 E	Rca	LIN-IC	TV, Video IF, Dem., Video-Verst./Amp., AGC				-
CA 3154 E	Rca	LIN-IC	TV, HA Sync. Signal Processor, AGC				-
CA 3156 E	Rca	LIN-IC	CTV, Video/Chroma Processor				-
CA 3157 E	Rca	LIN-IC	TV, HA/VA Digital Sync.-System				-
CA 3158 E	Rca	LIN-IC	CTV, Chroma-System, VCO, Hue Control				-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
CA 3159 E	Rca	LIN-IC	TV, HA Processor, AGC Detector	16-DIP			-
CA 3160(A,B)E	Rca	BIMOS-OP-IC	MOS In/Out, ±18V, -55...+125°, InOffs<15(A<5, B<2mV)	8-DIP			-
CA 3160(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3160(A,B)E: Fig. *	TO-99			-
CA 3161 E	Rca	LIN-IC	BCD →7-Segment Decoder, +7V	16-DIP			-
CA 3162 E	Rca	A/D-IC	Dual Slope, 3-Digit MPX BCD Display Output, 7V	16-DIP			-
CA 3163 E	Rca	LIN-IC	VHF/UHF-Teiler/Prescaler, ...1GHz, 1:256, 1:64	14-DIP			-
CA 3164 E	Rca	BIMOS-IC	Detector, Alarm System, Ucc=7...11V	14-DIP			-
CA 3165 E	Rca	LIN-IC	Näherungsschalter/Proximity Detector, 2 Outputs	8-DIP			-
CA 3165 E1	Rca	LIN-IC	=CA 3165E: 5 Outputs	14-DIP			-
CA 3166 E	Rca	BIMOS-OP-IC	MOS In, TV Tuning Band Select, AFT Mode Switch,35V	18-DIP			-
CA 3168 E	Rca	LIN-IC	2-Digit BCD →7-Segment Decoder, +6V	24-DIP			-
CA 3169(M)	Rca	LIN-IC	Solenoid/Motor Driver, 17V, 2.5/3A, M=Horiz. Mount	17/5Pin	TO-220/5		-
CA 3170 E	Rca	LIN-IC	CTV, Chroma-System, VCO, Hue Control	16-DIP			-
CA 3172 E	Rca	LIN-IC	CTV, Chroma Demodulator	14-DIP			-
CA 3179 E	Rca	ECL-IC	VHF/UHF-Teiler/Prescaler, 1,25GHz, 1:256, 1:64	14-DIP			-
CA 3183 AE	Rca	LIN-IC	=CA 3183E: 50/40V	16-DIP			-
CA 3183 E	Rca	LIN-IC	5x NPN-Trans.-Array, 40/30V, 0,075A	16-DIP			-
CA 3189 E	Rca	LIN-IC	HiFi, FM IF, Dem., LF Inp, AFC, AGC(prog.)	16-DIP			TCA 3189, LM 3189N
CA 3190 E	Rca	LIN-IC	TV, HA/VA Digital Sync.-System	14-DIP			-
CA 3191 E	Rca	LIN-IC	TV, Video IF, Sync. Separator, AGC(pos./neg.)	16-DIP			-
CA 3192 E	Rca	LIN-IC	TV, Video IF, Dem., Video-Verst./Amp., AFT	16-DIP			-
CA 3193 AE,AS,AT	Rca	BIMOS-OP-IC	=CA 3193E: ±18V, -25...+85°	-			-
CA 3193 BE,BS,BT	Rca	BIMOS-OP-IC	=CA 3193E: ±22V, -55...+125°	-			-
CA 3193 E	Rca	BIMOS-OP-IC	Bipolar In/Out, hi-prec, ±18V, 0...+70°	8-DIP			-
CA 3193 S,T	Rca	BIMOS-OP-IC	=CA 3193E: Fig. *	TO-99			-
CA 3194 E	Rca	LIN-IC	CTV, PAL Luminance/Chroma Processor	24-DIP			-
CA 3195	Rca	LIN-IC	PLL FM MPX Stereo-Decoder, Ucc=10...16V	16-DIP			-
CA 3199 E	Rca	ECL-IC	VHF/UHF-Teiler/Prescaler, 1,3GHz, 1:4	8-DIP			-
CA 3201 E	Rca	LIN-IC	CTV, Chroma Processor, Demodulator	24-DIP			-
CA 3202 E	Rca	LIN-IC	TV, HA/VA Digital Sync.-System	14-DIP			-
CA 3207 E	Rca	BIMOS-IC	Sequencer Driver f. FLT, Ucc=55V	22-DIP			-
CA 3208 E	Rca	BIMOS-IC	Segment Latch-Driver f. FLT, Ucc=55V	22-DIP			-
CA 3209 E	Rca	LIN-IC	HiFi, FM IF, Demodulator, AGC(prog.)	16-DIP			-
CA 3210 E	Rca	LIN-IC	TV, HA/VA Digital Sync.-System	24-DIP			-
CA 3211 E	Rca	LIN-IC	VHF/UHF-Teiler/Prescaler, 1GHz, 1:256	18-DIP			-
CA 3215 E	Rca	LIN-IC	Video Disk, FM IF, PLL Detector Limiter	16-DIP			-
CA 3216 E	Rca	LIN-IC	CTV, Chroma Processor	24-DIP			-
CA 3217 E	Rca	LIN-IC	CTV, Chroma/Luminance Processor	28-DIP			-
CA 3219 E	Rca	LIN-IC	Quad Power NAND Driver, Logic Interface	16-DIP			-
CA 3221 E	Rca	LIN-IC	CTV, Chroma-Verst./Amp., Demodulator (NTSC)	16-DIP			-
CA 3223 E	Rca	LIN-IC	TV, HA/VA Digital Sync.-System	24-DIP			-
CA 3227 E	Rca	LIN-IC	5x NPN-Trans.-Array, VHF, 12/8V, 20mA, >3GHz	16-DIP			-
CA 3228(E)	Rca	LIN-IC	Speed-Control System	24-DIP			-
CA 3240(A)E	Rca	BIMOS-OP-IC	=CA 3140(A)E: Dual	8-DIP			-
CA 3240(A)E1	Rca	BIMOS-OP-IC	=CA 3140(A)E: Dual	14-DIP			-
CA 3246 E	Rca	LIN-IC	5x NPN-Trans.-Array, VHF, 12/8V, 20mA, >3GHz	14-DIP			-
CA 3260(A,B)E	Rca	BIMOS-OP-IC	=CA 3160(A,B)E: Dual	8-DIP			-
CA 3260(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3160(A,B)E: Dual	TO-99			-
CA 3280	Rca	OP-IC	Dual, Variable, ±18V, InOffset<3mV, 0...+70°	16-DIP			-
CA 3280 A	Rca	OP-IC	=CA 3280: InOffset<0,5mV, -55...+125°	16-DIP			-
CA 3290(A,B)E	Rca	BIMOS-OP-IC	MOS In, ±18(B=±22)V, -55...+125°, Offs<20(A<10, B<6mV)	8-DIP			-
CA 3290(A)E1	Rca	BIMOS-OP-IC	=CA 3290(A,B)E: Fig. *	14-DIP			-
CA 3290(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3290(A,B)E: Fig. *	TO-99			-
CA 3300(D)	Rca	CMOS-A/D-IC	6 Bit, hi-speed, Video, 15MHz	18-DIP			-
CA 3302...	Rca	KOP-IC	=LM 3302...	14-DIP			•LM 3302...
CA 3308(D)	Rca	CMOS-A/D-IC	8 Bit, hi-speed, Video, 15MHz	24-DIP			-
CA 3401 E,G	Rca	OP-IC	Quad, +18V, 5MHz, -55...+125°	14-DIP,DIC			MC 3401...
CA 3420 E,AE,BE	Rca	BIMOS-OP-IC	PMOS In, 22V, -55...+125°, InOffs.<10mV(A<5, B<2mV)	8-DIP			-
CA 3420(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3420E...: Fig. *	TO-99			-
CA 3440 E,AE,BE	Rca	BIMOS-OP-IC	PMOS In(10pA), lo-power, ±12,5V, -55...+125° InOffs.<10mV (A<5mV, B<2mV)	8-DIP			-
CA 3440(A,B)S,T	Rca	BIMOS-OP-IC	=CA 3440E...: Fig. *	TO-99			-
CA 3493 AE,AS,AT	Rca	BIMOS-OP-IC	=CA 3493E: ±18V, -25...+85°	-			-
CA 3493 BE,BS,BT	Rca	BIMOS-OP-IC	=CA 3493E: ±22V, -55...+125°	-			-
CA 3493 E	Rca	BIMOS-OP-IC	Bipolar In/Out, hi-prec, ±18V, 0...+70°	8-DIP			-
CA 3493 S,T	Rca	BIMOS-OP-IC	=CA 3493E: Fig. *	TO-99			-
CA 3524(E)	Rca	LIN-IC	=CA 1524: 0...+70°	16-DIP			•SG 3524
CA 3600 E	Rca	MOS-IC	6x N-FET/3x P-FET, 15V, 10mA	14-DIP			-
CA 6078 AS,AT	Rca	OP-IC	lo-power, lo-volt(>±0,75V), ±18V, -55...+125°	TO-99			-
CA 6741 CS,CT	Rca	OP-IC	=CA 6741S,T: ±18V, 0...+70°	TO-99			... 741C...
CA 6741 S,T	Rca	OP-IC	Serie 741, lo-noise, ±22V, -55...+125°	TO-99			... 741...
CA 7607 E	Rca	LIN-IC	TV, Video IF System 1.SAW Filter, AGC(f.FET Tuner)	16-DIP			-
CA 7611 E	Rca	LIN-IC	TV, Video IF System 1.SAW Filter, AGC(f.NPN Tuner)	16-DIP			-
CAC	Si-N		=BC 868 (SMD-Marking)	39	SOT-89		•BC 868

CB...CC

CB	Si-N	=2SC3646 (SMD-Marking)	39	SOT-89			•2SC3646
CB	Si-N	=2SD1368-CB (SMD-Marking)	39	SOT-89			•2SD1368
CB	Si-P	=BCW 61RB (SMD-Marking)	35	SOT-23			•BCW 61RB
CB	Si-N	=BCX 68-10 (SMD-Marking)	39	SOT-89			•BCX 68-10
CB	Si-N	=BFS 19 (SMD-Marking)	35	SOT-23			•BFS 19
CB	Si-N/P+R	=XN 4315 (SMD-Marking)	46	SOT-163			•XN 4315
CB	Si-N/P+R	=XP 4315 (SMD-Marking)	46(2mm)	SOT-363			•XP 4315
CB	MOS-P-FET-e	=µPA573T (SMD-Marking)	45(2mm)	SOT-353			•µPA573T
CBC	Si-N	=BC 868-... (SMD-Marking)	39	SOT-89			•BC 868
CBG	Si-N	=2SC3324-GR (SMD-Marking)	35	SOT-23			•2SC3324
CBL	Si-N	=2SC3324-BL (SMD-Marking)	35	SOT-23			•2SC3324
CBN	Si-N	=2SC4132-N (SMD-Marking)	39	SOT-89			•2SC4132
CBP	Si-N	=2SC4132-P (SMD-Marking)	39	SOT-89			•2SC4132
CBQ	Si-N	=2SC4132-Q (SMD-Marking)	39	SOT-89			•2SC4132
CBR	Si-N	=2SC4132-R (SMD-Marking)	39	SOT-89			•2SC4132
CC	Si-P	=2SA1122-C (SMD-Marking)	35	SOT-23			•2SA1122
CC	Si-P	=2SA1364-C (SMD-Marking)	39	SOT-89			•2SA1364

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
CC		Si-N	=2SC3647 (SMD-Marking)	39	SOT-89		*2SC3647
CC		Si-N	=2SD1368-CC (SMD-Marking)	39	SOT-89		*2SD1368
CC		Si-P	=BCW 61RC (SMD-Marking)	35	SOT-23		*BCW 61RC
CC		Si-N	=BCX 68-16 (SMD-Marking)	39	SOT-89		*BCX 68
CC		Si-N	=BF 544 (SMD-Marking)	35	SOT-23		*BF 544
CC 6168 F		Si-N	=BF 254			BF 255 7d	*BF 254
CC 6168 G		Si-N	=BC 239			BC 550 7a	*BC 239
CC 6225(F)		Si-N	=BF 255			BF 255 7d	*BF 255
CC 6227(F)		Si-N	=BF 254			BF 255 7d	*BF 254
CC 62266		Si-N	=BF 254			BF 255 7d	*BF 254
CC 62276		Si-N	=BF 254			BF 255 7d	*BF 254
CC A		Si-N	=2SC3326A (SMD-Marking)	35	SOT-23		*2SC3326A
CC B		Si-N	=2SC3326B (SMD-Marking)	35	SOT-23		*2SC3326B
CCC		Si-N	=BC 868-... (SMD-Marking)	39	SOT-89		*BC 868
CCS 2001(G)		Si-N	=BF 254			BF 255 7d	*BF 254
CCS 2004(B,D)		Si-N	=BC 238			BC 546 7a	*BC 238
CCS 2006(G)		Si-N	=BF 255			BF 255 7d	*BF 255
CCS 2008(G,GF)		Si-N	=BF 254			BF 255 7d	*BF 254
CCS 2053(EFG)		Si-N	=BC 337			BC 337 7a	*BC 338
CCU-06A		MOS-IC	FB	40-DIP			
CCU 2000...200x	Itt	HMOS- μ C-IC	TV, 8 Bit, 96x8 Bit RAM, 3,875kB ROM	40-DIP			-
CCU 2030...203x	Itt	HMOS- μ C-IC	TV, 8 Bit, 120x8 Bit RAM, 6,5kB ROM	40-DIP			-
CCU 2050...205x ...	Itt	HMOS- μ C-IC	TV, 8 Bit, 256x8 Bit RAM, 8kB ROM	40-DIP			-
CCU 2070...207x ...	Itt	HMOS- μ C-IC	TV, 8 Bit, 256x8 Bit RAM, 16kB ROM	40-DIP			-
CCU 3000 ...	Itt	CMOS-IC	TV, Zentralprozessor/Central Processor				-
CCU-N6 10CR525		MOS-IC	FB	40-DIP			-
CD							
CD 0000		Ge-Di	=1N34	31a	AA 133, 1N4148	31a	*1N34
CD		Si-P	=2SA1122-D (SMD-Marking)	35	SOT-23		*2SA1122
CD		Si-P	=2SA1364-D (SMD-Marking)	39	SOT-89		*2SA1364
CD		Si-P	=2SA1366-D (SMD-Marking)	35	SOT-23		*2SA1366
CD		Si-N	=2SC3648 (SMD-Marking)	39	SOT-89		*2SC3648
CD		Si-P	=BCW 61RD (SMD-Marking)	35	SOT-23		*BCW 61RD
CD		Si-N	=BCX 68-25 (SMD-Marking)	39	SOT-89		*BCX 68-25
CD(s)		Si-N	=BSS 81B (SMD-Marking)	35	SOT-23		*BSS 81B
CD 0014		Si-Di	=BAV 20			BA 159 31a	*BAV 20
CD 0014 N(NA,NG)		Si-N	=BC 337			BC 337 7a	*BC 337
CD 021		Si-Di	=BA 127	31a	1N4148	31a	*BA 127
CD 0089		Si-Di	=BA 100	31a	1N4148	31a	*BA 100
CD 0099		Si-Di	=BA 100	31a	1N4148	31a	*BA 100
CD 0140		Z-Di	7,5V	31a	Z-Diode 7,5V	31a	BZW22/... BZX61/... ZYP... 1N5236,++
CD 624		Si-Di	=RGP 30	31a	BYW 96 E	31a	*RGP 30 G...M
CD 951		Si-P	=BC 309	7e	TO-92	BC 560 7a	*BC 309
CD 1602		Si-P	=BC 309			BC 560 7a	*BC 309
CD 3226 E	Rca	CMOS-IC	μ Comp. -Video Disk Interface Digital Buffer(DAXI)	14-DIP			
CD 4000...4599	Rca	CMOS-Logic	Standard CMOS-Logic 4000-Serie		*4xxx (C-MOS)		... 4000 ... 4xxx (CMOS)
CD 5000 D		Si-N	=BF 255	2a	BF 255	7d	*BF 255
CD 9000		Si-P	=BC 307	2a	BC 556	7a	*BC 307
CD 15000 C,D		Si-N	=BC 237	2a	BC 546	7a	*BC 237
CD 15000 E		Si-N	=BF 254	2a	BF 255	7d	*BF 254
CDC		Si-N	=BC 868-... (SMD-Marking)	39	SOT-89		*BC 868
CDC 8002		Si-N	=BC 639			BC 639 7c	*BC 639
CDC 9002		Si-P	=BC 640			BC 640 7c	*BC 640
DDD 5000		Ge-Di	=AA 119	31a	AA 119	31a	*AA 119
CDG 00		Si-Di	=BA 216	31a	1N4148	31a	*BA 216
CDG 20		Si-Di	=1N4148	31a	1N4148	31a	*1N4148
CDG 21		Ge-Di	=AA 119	31a	AA 119	31a	*AA 119
CDG 22		Ge-Di	=AA 119	31a	AA 119	31a	*AA 119
CDG 23		Si-Di	=BA 127	31a	1N4148	31a	*BA 127
CDG 24		Si-Di	=BA 216	31a	1N4148	31a	*BA 216
CDG 25		Si-Di	=BA 127	31a	1N4148	31a	*BA 127
CDG 26		Si-Di	=BA 127	31a	1N4148	31a	*BA 127
CDG 27		Si-Di	=BA 216	31a	1N4148	31a	*BA 216
CDT 1310	Itt	Ge-P	LFS P, 40/35/35V, 5A, 45W	23a	TO-3		AL 102, AUY 28, 2N1539...43, 2N1544...48
CDT 1311	Itt	Ge-P	=CDT 1310: 60/55/30V	23a	TO-3		AL 102, AUY 28, 2N1540...43, 2N1545...48
CDT 1312	Itt	Ge-P	=CDT 1310: 80/65/35V	23a	TO-3		AL 102, AUY 28, 2N1541...43, 2N1546...48
CDT 1313	Itt	Ge-P	=CDT 1310: 100/80/50V	23a	TO-3		AL 102, AUY 37, 2N1542...43, 2N1547...48
CDT 1315	Stc	Ge-P	LFS P, 100/75V, 8A, 45W	23a	TO-3		AL 100, AUY 37, 2N2290, 2N2293
CDT 1319	Stc	Ge-P	LFS P, 40/35/35V, 5A, 45W	23a	TO-3		AL 102, AUY 28, 2N1539...43, 2N1544...48
CDT 1320	Stc	Ge-P	=CDT 1319: 60/50/35V	23a	TO-3		AL 102, AUY 28, 2N1540...43, 2N1545...48
CDT 1321	Stc	Ge-P	=CDT 1319: 80/65/35V	23a	TO-3		AL 102, AUY 28, 2N1541...43, 2N1546...48
CDT 1322	Stc	Ge-P	=CDT 1319: 100/75/35V	23a	TO-3		AL 102, AUY 37, 2N1542...43, 2N1547...48
CDT 1349(A)	Clv	Ge-P	=2N2063...2064	23a	TO-3		*2N2063...2064
CDT 1350(A)	Clv	Ge-P	=2N2065...2066	23a	TO-3		*2N2065...2066
CE...CK							
CE		Si-P	=2SA1122-E (SMD-Marking)	35	SOT-23		*2SA1122
CE		Si-P	=2SA1364-E (SMD-Marking)	39	SOT-89		*2SA1364
CE		Si-P	=2SA1366-E (SMD-Marking)	35	SOT-23		*2SA1366
CE		Si-N	=2SC3649 (SMD-Marking)	39	SOT-89		*2SC3649
CE		Si-P	=BCP 69 (SMD-Marking)	~39°	SOT-223		*BCP 69
CE		Si-P	=BCX 69 (SMD-Marking)	39	SOT-89		*BCX 69
CE(s)		Si-N	=BSS 79B (SMD-Marking)	35	SOT-23		*BSS 79B
CE 1 A3Q	Nec	Si-N+Di+R	Rb=1k, Rbe=10k Ω , Z-Di(C -B), 60/60 \pm 10V, \pm 2/3A, 1W hi-hFE>1000	9b	(SP-8)		
CE 1 F3P	Nec	Si-N+Di+R	=CE 1A3Q: Rb=2,2k, Rbe=10k Ω	9b	(SP-8)		
CE 1 N2R	Nec	Si-N+Di+R	=CE 1A3Q: Rb=0,68k, Rbe=10k Ω	9b	(SP-8)		
CE 2 A3Q...N2R	Nec	Si-N+Di+R	=CE 1A3Q...N2R: ohne/without. Z-Di	9b	(SP-8)		
CEC		Si-P	=BC 869 (SMD-Marking)	39	SOT-89		*BC 869
CEN		Si-N	=2SC4505-N (SMD-Marking)	39	SOT-89		*2SC4505
CEO		Si-N	=2SC3325-O (SMD-Marking)	35	SOT-23		*2SC3325
CEP		Si-N	=2SC4505-P (SMD-Marking)	39	SOT-89		*2SC4505

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
CEQ		Si-N	=2SC4505-Q (SMD-Marking)	39	SOT-89		+2SC4505
CEY		Si-N	=2SC3325-Y (SMD-Marking)	35	SOT-23		+2SC3325
CF		Si-P	=2SA1366-F (SMD-Marking)	35	SOT-23		+2SA1366
CF		Si-N	=2SC3650 (SMD-Marking)	39	SOT-89		+2SC3650
CF		Si-P	=BCX 69-10 (SMD-Marking)	39	SOT-89		+BCX 69-10
CF(s)		Si-N	=BSS 79C (SMD-Marking)	35	SOT-23		+BSS 79C
CF 1		GaAs-FET	=CF 910 (SMD-Marking)	44	SOT-143		+CF 910
CF 3		GaAs-FET	=CF 912 (SMD-Marking)	44	SOT-143		+CF 912
CF 4		GaAs-FET	=CF 922 (SMD-Marking)	44	SOT-143		+CF 922
CF 5		GaAs-FET	=CF 930 (SMD-Marking)	44	SOT-143		+CF 930
CF 100	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=21dB(800M)	25g	SOT-103		-
CF 121	Aeg	GaAs-N-FET-d	=CF 100: integr. Gateschutz-Dioden/Gate Protection	25g	SOT-103		-
CF 221	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=17dB(800M)	25o	SOT-103		-
CF 300	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=23dB(800M)	25g	SOT-103		-
CF 400	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=17dB(800M)	25o	SOT-103		-
CF 739	Sie	GaAs-N-FET-d	SMD, Dual-Gate, VHF/UHF/SATV, 10/6V, 80mA Idss=6...60ma, Up<2.5V, F=1.8/Gp=17dB(1750MHz)	44g	SOT-143		-
CF 750	Sie	GaAs-N-FET	Dual-Gate, Wideband, 8/5V, 80mA, 0.4...3GHz Idss=50mA, F=1.9/Gp=9dB(1800MHz)	44	SOT-143		-
CF 910	Aeg	GaAs-N-FET-d	=CF 100: SMD	44g	SOT-143		-
CF 912	Aeg	GaAs-N-FET-d	=CF 121: SMD	44g	SOT-143		-
CF 922	Aeg	GaAs-N-FET-d	=CF 221: SMD	44g	SOT-143		-
CF 930	Aeg	GaAs-N-FET-d	=CF 300: SMD	44g	SOT-143		-
CF 930R	Aeg	GaAs-N-FET-d	=CF 300: SMD	44-?	SOT-143		-
CF 940	Aeg	GaAs-N-FET-d	=CF 400: SMD	44g	SOT-143		-
CF 2386	Tdy	N-FET	Uni, 25V, 0.5W, Idss<9mA, Up<-8V	2a	TO-5		BF 244...245, BFW 10, 2N3819, 2N4222, ++
CFK 10	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 50mA, Gp=21dB(800M)	51(G2DSG1)	SOT-173		-
CFK 12	Aeg	GaAs-N-FET-d	=CFK 10: integr. Gateschutz-Dioden/Gate Protection	51(G2DSG1)	SOT-173		-
CFK 22	Aeg	GaAs-N-FET-d	=CFK 10: int. Gateschutz/protect., Gp=17dB(800MHz)	51(G2DG1S)	SOT-173		-
CFK 30	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=30dB(800M)	51(G2DSG1)	SOT-173		-
CFK 40	Aeg	GaAs-N-FET-d	Dual-Gate, UHF, ... 2GHz, 10/6V, 80mA, Gp=17dB(800M)	51(G2DG1S)	SOT-173		-
CFM 13026	Tsc	N-FET	Uni, 40V, Idss<50mA, Up<-7V	2a	TO-18		BF 348, BFT 10, 2N4091...4092
CFQ		Si-N	=2SD2150-Q (SMD-Marking)	39	SOT-89		+2SD2150
CFR		Si-N	=2SD2150-R (SMD-Marking)	39	SOT-89		+2SD2150
CFS		Si-N	=2SD2150-S (SMD-Marking)	39	SOT-89		+2SD2150
CFX 13	Phi	GaAs-FET	Mikro-W., 5/6V, 100mA, F<3dB/Gp=6.5dB(12GHz)	52 (SGSD)	SOT-100		-
CFX 14	Phi	GaAs-FET	=CFX 13: F<3dB/Gp=6dB(16GHz)	52 (SGSD)	SOT-100		-
CFX 21	Phi	GaAs-FET	Mikro-W., 8/6V, 110mA, Up=-4V, Gp>11dB(11GHz)	52 (SGSD)	SOT-100		-
CFX 30	Phi	GaAs-FET	Mikro-W., 15/12V, 130mA, Up=-2.5V, Gp>7dB(11GHz)	62f	(11x3,4mm)		-
CFX 31	Phi	GaAs-FET	Mikro-W., 15/12V, 250mA, Up=-4V, Gp>7dB(11GHz)	62f	(11x3,4mm)		-
CFX 32	Phi	GaAs-FET	Mikro-W., 15/12V, 500mA, Up=-4V, Gp>7dB(8,5GHz)	62f	(11x3,4mm)		-
CFX 33	Phi	GaAs-FET	Mikro-W., 15/12V, 600mA, Up=-4V, Gp>5dB(8,5GHz)	62f	(11x3,4mm)		-
CFY 10	Sie	GaAs-N-FET-d	Mikro-W., 5/5V, 100mA, F<1,8dB/Gp>9,5dB(6GHz)	52 (SDSG)	SOT-100		-
CFY 11	Sie	GaAs-FET	Mikro-W., 5/5V, 100mA, Up=-2.5V, F<2,2/Gp>9dB(6GHz)	52 (SDSG)	SOT-100		-
CFY 12	Sie	GaAs-FET	Mikro-W., 5/5V, 100mA, Up=-2.5V, F<2,7/Gp>7,5dB(6G)	52 (SDSG)	SOT-100		-
CFY 13	Sie	GaAs-FET	=CFY 11:	51 (SDSG)	SOT-173		-
CFY 14	Sie	GaAs-FET	=CFY 12:	51 (SDSG)	SOT-173		-
CFY 15	Sie	GaAs-FET	=CFY 10	52 (SDSG)	SOT-100		-
CFY 16	Sie	GaAs-FET	=CFY 10	52 (SDSG)	SOT-100		-
CFY 17	Sie	GaAs-FET	=CFY 10:	51 (SDSG)	SOT-173		-
CFY 18	Sie	GaAs-FET	=CFY 10: F<1,2dB/Gp>10dB(6GHz)	51 (SDSG)	SOT-173		-
CFY 19	Sie	GaAs-N-FET-d	Mikro-W., 5/5V, 100mA, F<1,8dB/Gp>9,5dB(6GHz)	51 (SDSG)	SOT-173		-
CFY 20	Sie	GaAs-FET	Dual-Gate, F=1,8dB/Gp=16,5dB(4GHz)	52	SOT-100		-
CFY25(-17,-20,-25)	Sie	GaAs-N-FET-d	Mikro-W., 7/5V, 80mA, Idss=15...60mA, Up=0,3...3V -17: F<1,7/Gp>9dB(12GHz), -20: F<2/Gp>8,5dB(12GHz) -25: F<2,3/Gp>8,5dB(12GHz)	51 (SDSG)	SOT-173		-
CFY 30	Sie	GaAs-N-FET-d	SMD, Mikro-W., 7/5V, 80mA, Idss=20...80mA Up=0,5...4V, F<1,6(4GHz), Gp=8,9dB(6GHz)	44 (GSDS)	SOT-143		-
CFY 35(-20,-23)	Sie	GaAs-N-FET-d	Mikro-W., 6/5V, 60mA, Idss=10...45mA, Up=0,2...2,5V -20: F<2/Gp>8dB(12GHz), -23: F<2,3dB(12GHz)	-44(GSDS)			-
CFY 65(-12,-14)	Sie	GaAs-N-FET-d	Min, Mikro-W.(HEMT), 5,5/4V, 70mA, Idss=10...70mA Up<2,5V, -12: F<1,2/Gp>10dB, -14: F<1,4dB(12GHz)	51 (SDSG)	SOT-173		-
CFY 66	Sie	GaAs-N-FET	Min, Mikro-W., 3,5/3V, 60mA, F=0,7/Gp=10,5dB(12GHz)	51 (SDSG)	SOT-173		-
CFY 75(-13,-15)	Sie	GaAs-N-FET-d	SMD, UHF Inp ... 20GHz, 5/4V, 70mA, Idss=10...70mA Up=0,2...2,5V, -13: F<1,3/Gp>9,5dB(12GHz) -15: F<1,5/Gp>9dB(12GHz)	-44 (GSDS)			-
CFY 76-08	Sie	GaAs-N-FET	SMD, Mikro-W.(HEMT-FET), 3,5/3V, 60mA F=0,7/Gp=10,5dB(12GHz)	-44 (GSDS)			-
CFY 77(-08,-10)	Sie	GaAs-N-FET-d	SMD, Mikro-W.(HEMT), 3,5/3V, 60mA, Idss=10...60mA Up=0,2...2V, -08: F<0,8/Gp>10dB(12GHz) -10: F<1/Gp>9,5dB(12GHz)	-44			-
CG		Si-P	=2SA1163-GR (SMD-Marking)	35	SOT-23		+2SA1163
CG		Si-P	=2SA1587-GR (SMD-Marking)	35	SOT-23		+2SA1587
CG		Si-N	=2SC3651 (SMD-Marking)	39	SOT-89		+2SC3651
CG		Si-P	=BCX 69-16 (SMD-Marking)	39	SOT-89		+BCX 69-16
CG		Si-P	=BCX 71RG (SMD-Marking)	35	SOT-23		+BCX 71RG
CG(s)		Si-N	=BSS 81C (SMD-Marking)	35	SOT-23		+BSS 81C
CG 1	Gie	Si-Di	TV Damper-Di, 1400V, 1,5A, Uf<1,1V(1A), <15µs	31a	SOD-57	BY 228	BY 228, BY 448
CG 2	Gie	Si-Di	=CG 1: 2A, Uf<1,1V(2A)	31a	SOD-57	BY 228	BY 228, BY 448
CG 3	Gie	Si-Di	=CG 1: 3A, Uf<1,2V(3A)	31a	SOD-64	BY 228	BY 228
CG 61 H		Ge-Di	=AA 133	31a	AA 133	31a	+AA 133
CG 64 H		Ge-Di	=1N34		AA 133	31a	+1N34
CGC		Si-P	=BC 869-... (SMD-Marking)	39	SOT-89		+BC 869
CGG		Si-N	=2SC3426-GR (SMD-Marking)	35	SOT-23		+2SC3426
CGL		Si-N	=2SC3426-BL (SMD-Marking)	35	SOT-23		+2SC3426
CGP		Si-N	=2SC5053-P (SMD-Marking)	39	SOT-89		+2SC5053
CGQ		Si-N	=2SC5053-Q (SMD-Marking)	39	SOT-89		+2SC5053
CGR		Si-N	=2SC5053-R (SMD-Marking)	39	SOT-89		+2SC5053
CGY		Si-N	=2SC3426-Y (SMD-Marking)	35	SOT-23		+2SC3426
CGY 10...14	Aeg	(GaAs)-Di	Gunn Di., UHF		SOD-31		-
CGY 20...50	Sie	GaAs-FET	UHF, Breitbandverst./Wideband Amplifier				-
CH		Si-Di	=1SS351 (SMD-Marking)	35	SOT-23		+1SS351
CH		Si-P	=2SB1002-CH (SMD-Marking)	39	SOT-89		+2SB1002

Original	Fabric.	Constr.	Info	(Compl.	Fig.	JAEGER	Fig.	International	
CH		Si-N	=2SC4272 (SMD-Marking)		39	SOT-89		-2SC4272	
CH		Si-P	=BCX 69-25 (SMD-Marking)		39	SOT-89		-BCX 69	
CH(s)		Si-P	=BSS 80B (SMD-Marking)		35	SOT-23		-BSS 80B	
CHC		Si-P	=BC 869-... (SMD-Marking)		39	SOT-89		-BC 869	
CHO		Si-N	=2SC3437-O (SMD-Marking)		35	SOT-23		-2SC3437	
CHO		Si-N	=2SC4667-O (SMD-Marking)		35(2mm)	SOT-323		-2SC4667	
CHR		Si-N	=2SC3437-R (SMD-Marking)		35	SOT-23		-2SC3437	
CHR		Si-N	=2SC4667-R (SMD-Marking)		35(2mm)	SOT-323		-2SC4667	
CHY		Si-N	=2SC3437-Y (SMD-Marking)		35	SOT-23		-2SC3437	
CHY		Si-N	=2SC4667-Y (SMD-Marking)		35(2mm)	SOT-323		-2SC4667	
CI		Si-N	=2SC4080 (SMD-Marking)		39	SOT-89		-2SC4080	
CI		Si-N	=2SD1777 (SMD-Marking)		44	SOT-143		-2SD1777	
CIC 7641		LIN-IC	-TA 7641BP		16-DIP			-TA 7641BP	
CIC 9185		LIN-IC	-KA 2412A		14-DIP			KA 2412A, LS 285A	
CJ		Si-P	=2SB1002-CJ (SMD-Marking)		39	SOT-89		-2SB1002	
CJ		Si-N	=2SC4390 (SMD-Marking)		39	SOT-89		-2SC4390	
CJ		MOS-N-FET-d	=2SK1067 (SMD-Marking)		35(2mm)	SOT-323		-2SK1067	
CJ		MOS-N-FET-d	=2SK543 (SMD-Marking)		35	SOT-23		-2SK543	
CJ(s)		Si-P	=BSS 80C (SMD-Marking)		35	SOT-23		-BSS 80C	
CK		Si-N	=2SC4520 (SMD-Marking)		39	SOT-89		-2SC4520	
CK		Si-N	=2SD999-CK (SMD-Marking)		39	SOT-89		-2SD999	
CK		Si-P	=BCX 71RK (SMD-Marking)		35	SOT-23		-BCX 71RK	
CK		Si-P+R	=XN 6114 (SMD-Marking)		46	SOT-163		-XN 6114	
CK		Si-P+R	=XP 6114 (SMD-Marking)		46(2mm)	SOT-363		-XP 6114	
CK 300		IC	Digital-Uhr/Digital Clock		28-DIP			-	
CL...CR									
CL		Si-P	=2SA1163-BL (SMD-Marking)		35	SOT-23		-2SA1163	
CL		Si-P	=2SA1342 (SMD-Marking)		35	SOT-23		-2SA1342	
CL		Si-P	=2SA1587-BL (SMD-Marking)		35(2mm)	SOT-323		-2SA1587	
CL		Si-P	=2SA1677 (SMD-Marking)		35(2mm)	SOT-323		-2SA1677	
CL		Si-N	=2SC4521 (SMD-Marking)		39	SOT-89		-2SC4521	
CL		Si-N	=2SD999-CL (SMD-Marking)		39	SOT-89		-2SD999	
CL(s)		Si-P	=BSS 82B (SMD-Marking)		35	SOT-23		-BSS 82B	
CL 055(A...D)	Mic	Si-P	LF Drv25/20V, 1/1.5A, 0.625W, 120MHz	ICL066	7e	TO-92	BC 327	7a	BC 327...328, BC 636, BC 638, 2SB1116,++
CL 055...P		Si-P	=CL 055... : 0,75W		30e	TO-237	(2SA1593) ⁵	30j	2SB968, 2SB1181...82, (BD 506, BD 508),+ ⁶
CL 066(A...D)	Mic	Si-N	LF Drv, 25/20V, 1/1.5A, 0.625W, 120MHz	ICL055	7e	TO-92	BC 337	7a	BC 337...338, BC 635, BC 637, 2SD1616,++
CL 066...P		Si-N	=CL 066... : 0,75W		30e	TO-237	(2SC4135) ⁵	30j	2SD1078, 2SD1295, (BD 505, BD 507),+ ⁶
CL 116 P		Si-P	=BC 307		7a	TO-92	BC 556	7a	-BC 307
CL 151-3(A...C)	Mic	Si-N	Min, Uni, -/10V, 0.1A, 0.1W	ICL152	=36b				BC 122...123, BC 146
CL 151-4(A...C)		Si-N	=CL 151-3:		7c	SOT-42			BC 122...123, BC 146
CL 152-3(A...C)	Mic	Si-P	Min, Uni, -/10V, 0.1A, 0.1W	ICL151	=36b				BC 200, BC 202...203
CL 152-4(A...C)		Si-P	=CL 152-3:		7c	SOT-42			BC 200, BC 202...203
CL 155(A...D)	Mic	Si-P	LF Drv, 30/25V, 1.5/2.2A, 0.625W, 120MHz	ICL166	7e	TO-92	2SB892	7c(9mm)	MPS 650...51, 2SC2236, 2SD1146, 2SD1207
CL 155...P		Si-P	=CL 155... : 0,75W		30e	TO-237	(2SA1593) ⁵	30j	2SB968, 2SD1181...82, (BD 506, BD 508),+ ⁶
CL 166(A...D)	Mic	Si-N	LF Drv, 30/25V, 1.5/2.2A, 0.625W, 120MHz	ICL155	7e	TO-92	2SD1207	7c	MPS 750...51, 2SA966, 2SA1315, 2SA1382
CL 166...P		Si-N	=CL 166... : 0,75W		30e	TO-237	(2SC4135) ⁵	30j	2SD1078, 2SD1295, (BD 505, BD 507),+ ⁶
CL 168	Mic	Si-N	LF Drv,Out, -/7V, 3A, 0.625W, 120MHz		7c	TO-92	2SD1347	7c(9mm)	2SD879, 2SD1347, 2SD1507, 2SD1617, ++
CL 169	Mic	Si-N	LF Drv,Out, -/9V, 3A, 0.625W, 100MHz		7c	TO-92	2SD1347	7c(9mm)	2SD879, 2SD1347, 2SD1507, 2SD1617, ++
CL 266	Mic	Si-N	LF Drv,Out, -/60V, 2A, 0.625W		7c	TO-92	(2SD1207) ⁷	7c	MPS 651, 2SC3328, 2SC3669, 2SC4145
CL 266 P		Si-N	=CL 266: 0,75W		30e	TO-237	(2SC4135) ⁵	30j	2SD1079, 2SD1281...82, (BD 519, BD 527)+ ⁶
CL 855(A...C)	Mic	Si-P	LF Drv, 70/60V, 1/1.5A, 0.625W, 150MHz	ICL866	7e	TO-92	BC 640	7c	BC 640, 2SA1708, 2SB984, 2SB1116A,++
CL 866(A...C)	Mic	Si-N	LF Drv, 70/60V, 1/1.5A, 0.625W, 150MHz	ICL855	7e	TO-92	BC 639	7c	BC 639, 2SC4488, 2SD1768, 2SD1616A,++
CLK 5010	Itt	CMOS-IC	Kfz-Quarzuhr/Car Quartz Clock			16-DIP			-
CLK 5011	Itt	CMOS-IC	Kfz-Quarzuhr/Car Quartz Clock			16-DIP			-
CLY 5	Sie	GaAs-N-FET	UHF, 8/6V, 1.2A, Gp=9.5dB(1,8GHz)		=39°	SOT-223			-
CLY 10	Sie	GaAs-N-FET	UHF, 8/6V, 2A, Gp=9dB(1,8GHz)		=39°	SOT-223			-
CM		Si-N	=2SC4504 (SMD-Marking)		39	SOT-89			-2SC4504
CM		Si-N	=2SD999-CM (SMD-Marking)		39	SOT-89			-2SD999
CM(s)		Si-P	=BSS 82C (SMD-Marking)		35	SOT-23			-BSS 82C
CM 4-482 B		Opto							-
CMY 90	Sie	GaAs-FET	UHF, Wideband Amp, Ucc=3...6V, F=5,4/Gp=12dB(1845M)						-
CN		Si-N	=2SC4548 (SMD-Marking)		39	SOT-89			-2SC4548
CN 515 T	Fer	OP-IC	=µA 709: -55...+125°						-µA 709
CNX 62	Phi	Opto	Optokoppler, Riso>10GΩ		6-DIP		CNX 62 A	6-DIP	-
CNX 62 A	Phi	Opto	=CNX62: VDE-, SEMKO-, NEMKO-, DEMKO-Spec.		6-DIP		CNX 62 A	6-DIP	-
CNX 82	Phi	Opto	=CNX 83: ohne Basisanschl./no base conn. (Pin 6)		6-DIP		CNX 83 A	6-DIP	-
CNX 82 A	Phi	Opto	=CNX82: VDE-, SEMKO-, NEMKO-, DEMKO-Spec.		6-DIP		CNX 83 A	6-DIP	-
CNX 83	Phi	Opto	Optokoppler, Basis-Anschluß/base connect.(Pin 6)		6-DIP		CNX 83 A	6-DIP	-
CNX 83 A	Phi	Opto	=CNX62: VDE-, SEMKO-, NEMKO-, DEMKO-Spec.		6-DIP		CNX 83 A	6-DIP	-
CNY....		Opto							-
CO		Si-N	=2SC2881-O (SMD-Marking)		39	SOT-89			-2SC2881
CO		Si-N	=2SC4209-O (SMD-Marking)		35	SOT-23			-2SC4209
CO		Si-N	=2SC5087-O (SMD-Marking)		44	SOT-143			-2SC5087
CO		Si-N	=KTC4373-O (SMD-Marking)		39	SOT-89			-KTC 4373
CP		Si-P	=2SB767-P (SMD-Marking)		39	SOT-89			-2SB767
CP		Si-N	=2SC2411-CP (SMD-Marking)		=35	(MMT)			-2SC2411
CP		Si-N	=2SC2411K-P (SMD-Marking)		35	SOT-23			-2SC2411K
CP		Si-N	=2SC4097-P (SMD-Marking)		35(2mm)	SOT-323			-2SC4097
CP		Si-N	=HC 1L2N (SMD-Marking)		39	SOT-89			-HC 1...
CP 8 C...G	Hit	50Hz-Thy	200...600V, 30A(Tc=85°), 47A~, Igt/Ih<50/60mA Ca=200, D=300, E=400, F=500, G=600V		21b	TO-48			BTW48/..., CS23-..., MCR64-..., TAG35-...
CP 9 C...G	Hit	50Hz-Thy	=CP 8 C...G: TO-48 Flat Base		=21b				-
CP 1600	Itt	µC-IC	µComp., 8x16 Bit RAM		40-DIC				-
CQ		Si-P	=2SB1219-Q (SMD-Marking)		35(2mm)	SOT-323			-2SB1219
CQ		Si-P	=2SB1582-Q (SMD-Marking)		=35	(T Mini)			-2SB1582
CQ		Si-P	=2SB710-Q (SMD-Marking)		35	SOT-23			-2SB710
CQ		Si-P	=2SB767-Q (SMD-Marking)		39	SOT-89			-2SB767
CQ		Si-N	=2SC2411-CQ (SMD-Marking)		=35	(MMT)			-2SC2411
CQ		Si-N	=2SC2411K-Q (SMD-Marking)		35	SOT-23			-2SC2411K

Original	Fabric.	Constr.	Info	{Compl.	Fig.	JAEGER	Fig.	International	
CO		Si-N	=2SC4097-Q (SMD-Marking)		35(2mm)	SOT-323		2SC4097	
CO		Si-N	=HC 1A3M (SMD-Marking)		39	SOT-89		+HC 1...	
COX....		Opto							
COY....		Opto							
CR		Si-P	=2SB1219-R (SMD-Marking)		35(2mm)	SOT-323		2SB1219	
CR		Si-P	=2SB1582-R (SMD-Marking)		-35	(T Mini)		2SB1582	
CR		Si-P	=2SB710-R (SMD-Marking)		35	SOT-23		2SB710	
CR		Si-P	=2SB767-R (SMD-Marking)		39	SOT-89		2SB767	
CR		Si-N	=2SC2411-CR (SMD-Marking)		-35	(MMT)		2SC2411	
CR		Si-N	=2SC2411K-R (SMD-Marking)		35	SOT-23		2SC2411K	
CR		Si-N	=2SC4097-R (SMD-Marking)		35(2mm)	SOT-323		2SC4097	
CR		Si-N	=2SC4422 (SMD-Marking)		39	SOT-89		2SC4422	
CR		Si-N	=HC 1F3M (SMD-Marking)		39	SOT-89		+HC 1...	
CR		Si-N	=XP 6210 (SMD-Marking)		46(2mm)	SOT-363		+XP 6210	
CR 02 AM....		Thy	=BRX 49		7b	TO-92	BRX 49	7a	+BRX 49
CRT 1544	litt	Ge-P	L.F.S P, 60/40V, 25A, 90W		23a	TO-3		2N1651...1653, 2N2285...2287	
CRT 1545	litt	Ge-P	L.F.S P, 80/60V, 25A, 90W		23a	TO-3		2N1652...1653, 2N2286...2287	
CRT 1552	litt	Ge-P	L.F.S P, 40/30V, 25A, 90W		23a	TO-3		2N1651...1653, 2N2285...2287	
CRT 1553	litt	Ge-P	L.F.S P, 100/75V, 25A, 90W		23a	TO-3		2N1652...1653, 2N2286...2287	
CRT 1592	litt	Ge-P	L.F.S P, 80/60V, 35A		23a	TO-3		2N5693...5696	
CS									
CS		Si-N	=HC 1F3P (SMD-Marking)		39	SOT-89		+HC 1...	
CS		Si-P	=2SA1682 (SMD-Marking)		35	SOT-23		2SA1682	
CS		Si-P	=2SB1219-S (SMD-Marking)		35(2mm)	SOT-323		2SB1219	
CS		Si-P	=2SB1582-S (SMD-Marking)		-35	(T Mini)		2SB1582	
CS		Si-P	=2SB710-S (SMD-Marking)		35	SOT-23		2SB710	
CS		Si-P	=2SB767-S (SMD-Marking)		39	SOT-89		2SB767	
CS		Si-N	=2SD1870 (SMD-Marking)		39	SOT-89		2SD1870	
CS 0,6-0,2...12	Bbc	50Hz-Thy	200...1200V, 1.5A(Tc=85°C), 5A-, Igt/Ih<10mA		27n				
CS 0,8-0,2...07	Bbc	50Hz-Thy	200...700V, 0,8A(Ta=45°C), 8A-, Igt/Ih<10/20mA		30b	(TO-220MF)	TAG 626-600 ⁴	17e	BS1A30...M, (TAG 632-..., TAG 621-...)4
CS 1-02...12	Bbc	50Hz-Thy	200...1200V, 2A(Tc=85°C), 7A-, Igt/Ih<15/40mA		27n		TAG 626-...4	17e	BS1D36...
CS 1,2-02...07	Bbc	50Hz-Thy	200...700V, 0,3A(Ta=45°C), 10A-, Igt/Ih<15/25mA		30b	(TO-220MF)	TAG 626-600 ⁴	17e	BS1C07..., (TAG 630-..., TAG 620-...)4
CS 2,5-04...06	Bbc	50Hz-Thy	200...600V, 3,2A(Tc=85°C), 5A-, Igt/Ih<15/25mA		17e	TO-220	TAG 626-600	17e	TAG 620-..., BS1C10..., TIC 116... ++
CS 3-02...07	Bbc	50Hz-Thy	200...700V, 5A(Tc=85°C), 8A-, Igt/Ih<10/20mA		17e	TO-220	TAG 626-600	17e	T 3,5N..., TAG 661-..., TAG 662-... ++
CS 3,5-02...07	Bbc	50Hz-Thy	200...700V, 6A(Tc=85°C), 10A-, Igt/Ih<15/25mA		17e	TO-220	TAG 626-600	17e	S 2800..., TAG 665-..., TIC 126... ++
CS 3,5-05F22	Bbc	50Hz-Thy			13e	TO-202	TAG 626-600 ⁴	17e	S 2800D, TY 4004, 17122
CS 6-02...08	Bbc	50Hz-Thy	200...800V, 6A(Tc=85°C), Igt/Ih<15/25mA		17e	TO-220			S 2800..., TAG 665-..., TIC 126... ++
CS 10-02...08	Bbc	50Hz-Thy	200...800V, 10A(Tc=85°C), Igt/Ih<25/100mA		17e	TO-220			T 9,5N..., BS1D10...M
CS 0014		Si-Di	=BA 100		31a		1N4148	31a	+BA 100
CS 15-02...08	Bbc	50Hz-Thy	200...800V, 15A(Tc=85°C), Igt/Ih<25/100mA		17e	TO-220			
CS 0080		Si-Di	=BA 100		31a		1N4148	31a	+BA 100
CS 1245(F...T)		Si-N	=BC 337				BC 337	7a	+BC 337
CS 1250(E,F)		Si-N	=BC 639				BC 639	7c	+BC 639
CS 1251(E,F)		Si-P	=BC 640				BC 640	7c	+BC 640
CS 1303		Si-P	=BC 640				BC 640	7c	+BC 640
CS 1312 FG		Si-P	=BF 450		2a		BF 324	7a	+BF 450
CS 1312 H		Si-P	=BC 309		2a		BC 560	7a	+BC 309
CS 1312 I		Si-P	=BC 307		2a		BC 560	7a	+BC 307
CS 1506 F,G		Si-P	=BC 307		2a		BC 556	7a	+BC 307
CS 1508 E,G		Si-N	=BF 255		2a		BF 255	7d	+BF 255
CS 1509 E,F		Si-N	=BF 254		2a		BF 255	7d	+BF 254
CS 1655		Si-N	=BF 494		7c	TO-92	BF 255	7d	+BF 494
CS 1659		Si-N	=BC 338		7c	TO-92	BC 337	7a	+BC 338
CS 1660		Si-P	=BC 328		7c	TO-92	BC 327	7a	+BC 328
CS 1702		Si-N	=BC 337				BC 337	7a	+BC 337
CS 1774		Si-N	=BC 548		7c	TO-92	BC 546	7a	+BC 548
CS 1909		Si-N	=BC 337		2a		BC 337	7a	+BC 337
CS 1910		Si-P	=BC 327		2a		BC 327	7a	+BC 327
CS 1914(H)		Si-P	=BC 307		2a		BC 556	7a	+BC 307
CS 1978(A)		Si-N	=BC 337		7e	TO-92	BC 337	7a	+BC 337
CS 5609		Si-N	=BC 337				BC 337	7a	+BC 337
CS 5610		Si-P	=BC 327				BC 327	7a	+BC 327
CS 6203 H,I		Si-P	=BC 309		7e	TO-92	BC 560	7a	+BC 309
CS 6208		Si-N	=BC 337		2a		BC 337	7a	+BC 337
CS 6209		Si-P	=BC 327		2a		BC 327	7a	+BC 327
CS 6305(A)		Si-P	=BC 307		2a		BC 556	7a	+BC 307
CS 8204	Chy	LIN-IC	+KA 2410		8-DIP				KA 2410, ML 8204, TA 31001
CS 8205	Chy	LIN-IC	+KA 2411		8-DIP				KA 2411, ML 8205, TA 31002
CS 9003		Si-N	=BC 547		7e	TO-92	BC 546	7a	+BC 547
CS 9010		Si-N	=BC 547		7e	TO-92	BC 546	7a	+BC 547
CS 9011(D....I)		Si-N	=SS 9011		7e	TO-92	-SS 9011		+SS 9011
CS 9012(D....I)		Si-P	=SS 9012		7e	TO-92	-SS 9012		+SS 9012
CS 9013(D....I)		Si-N	=SS 9013		7e	TO-92	-SS 9013		+SS 9013
CS 9014(A....C)		Si-N	=SS 9014		7e	TO-92	-SS 9014		+SS 9014
CS 9015(A....C)		Si-P	=SS 9015		7e	TO-92	-SS 9015		+SS 9015
CS 9016(D....H)		Si-N	=SS 9016		7e	TO-92	-SS 9016		+SS 9016
CS 9017		Si-N	AM/FM, -/18V		7e	TO-92	BF 255	7d	BF 225, BF 255, BF 314, BF 495, BF 595++
CS 9018(D....H)		Si-N	=SS 9018		7e	TO-92	-SS 9018		+SS 9018
CS 9020(G,H)		Si-P	=BF 450		7e	TO-92	BF 324	7a	+BF 450
CS 9021		Si-N	=BF 495		7	TO-92	BF 255	7d	+BF 495
CS 9022		Si-N	=BC 547		7	TO-92	BC 546	7a	+BC 547
CS 9102(B)		Si-P	=BC 640				BC 640	7c	+BC 640
CS 9103(B,C)		Si-N	=BC 639				BC 639	7c	+BC 639
CS 9126		Si-N	=BC 548		7e	TO-92	BC 546	7a	+BC 548
CS 9127		Si-P	=BC 558		7e	TO-92	BC 556	7a	+BC 558
CSF....CW									
CSF 0,7-0,4	Bbc	F-Thy	400V, 3A(Tc=85°C), 4,7A-, Igt/Ih<50/<200mA		17e	TO-220			BT153, TAG650S-400, TAG655S-400
CSF 02 AM 1	Bbc	F-Thy	50V, 0,26A(Ta=45°C), 0,47A-, Igt/Ih<0,25/<2,3mA		7b	TO-92	BRX 49	7a	BRX45...46, BRX 50...51, TAG60F, TAG62F
CSF 02 AM 2		F-Thy	=CSF02AM1: 100V		7b	TO-92	BRX 49	7a	BRX46...47, BRX 50...51, TAG60A, TAG 62A
CSF 02 AM 4		F-Thy	=CSF02AM1: 200V		7b	TO-92	BRX 49	7a	BRX47...48, BRX 52...54, BRY55S/200

Original	Fabric.	Constr.	Info	{ Compl. Fig.	JAEGER	Fig.	International	
CSF 02 AM 8		F-Thy	=CSF02AM1: 400V	7b	TO-92	BRX 49	7a	BRX49, BRX 54...56, BRY55S/400
CSF 02 AM 10		F-Thy	=CSF02AM1: 500V	7b	TO-92	(TAG 626-600) ⁶	17e	BRX 55...56, BRY55S/500
CSF 7.9-04...08	Bbc	F-Thy	400...800V, 14A(Tc=50°), 58A-, Igt/Ih<100/<100mA	21b	TO-64			-
CSF 11-02...08	Bbc	F-Thy	200...800V, 10A(Tc=85°C), Igt/Ih<35/<80mA	17e	TO-220			-
CSM 2B2	Hit	50Hz-Thy	200V, 2A(Tc=71°), Igt/Ih=1/1,5mA	13b	TO-202	(TIC 106M) ⁴	17e	C 107..., TAG 107..., C 106..., TAG 106...
CSM 2B4		50Hz-Thy	=CSM2B2: 400V	13b	TO-202	(TIC 106M) ⁴	17e	C 107..., TAG 107..., C 106..., TAG 106...
CSM 3B2	Hit	50Hz-Thy	200V, 3A(Tc=63°), Igt/Ih=1/1,5mA	13b	TO-202	(TIC 106M) ⁴	17e	C 107..., TAG 107..., C 106..., TAG 106...
CSM 3B4		50Hz-Thy	=CSM3B2: 400V	13b	TO-202	(TIC 106M) ⁴	17e	C 107..., TAG 107..., C 106..., TAG 106...
CSM 5B2	Hit	50Hz-Thy	200V, 5A(Tc=101°), Igt/Ih=30/25mA	17b	TO-220			TAG 651..., TAG 656..., (CS 2.5..., +) ³
CSM 5B4		50Hz-Thy	=CSM5B2: 400V	17b	TO-220			TAG 651..., TAG 656..., (CS 2.5..., +) ³
CT		Si-N-Darl+Di	=2SD1472 (SMD-Marking)	39	SOT-89			*2SD1472
CT		Si-N	=2SD1935 (SMD-Marking)	35	SOT-23			*2SD1935
CT		Si-N	=HC 1L2Q (SMD-Marking)	39	SOT-89			*HC 1...
CT 1010	Pls	DIG-IC	TV, Frequ.-Teiler/Prescaler, :64					-
CT 1011	Pls	DIG-IC	TV, Frequ. Synthesizer					-
CT 1117	Pls	DIG-IC	TV, Synthesizer Tuning Interface, Band Switch					-
CT 1133	Pls	DIG-IC	TV, Synthesizer Tuning, Prog. Divider, 100-Ch. ROM					-
CT 1134	Pls	DIG-IC	TV, 100-Channel Control Logic f. CT 1133					-
CT 1650	Pls	DIG-IC	TV, μ P-Synthesizer Control, 32 Progr./100 Channels					-
CT 2010	Pls	DIG-IC	TV, Frequ.-T./Prescaler, 1GHz : 380/400, ECL Out	8-DIP				-
CT 2012	Pls	MOS-IC	TV, PLL Frequ. Synthesizer	24-DIP				-
CT 2014	Pls	DIG-IC	TV, Synthesizer Tuning Control, 32 Progr., 400 Ch.	40-DIP				-
CT 2015	Pls	DIG-IC	TV, Synthesizer Tuning Control, 32 Progr., 400 Ch.	24-DIP				-
CT 2017	Pls	DIG-IC	TV, Synthesizer Tuning Interface					-
CT 2030	Pls	ROM-IC	TV, ROM f. 100Kanäle/Channel(Name & Frequ.) (PAL)	16-DIP				-
CT 2031	Pls	ROM-IC	=CT 2030: f. Frankr./French Standard	16-DIP				-
CT 2032	Pls	ROM-IC	=CT 2030: f. USA	16-DIP				-
CT 2033	Pls	ROM-IC	=CT 2030: f. England/British Isles	16-DIP				-
CT 2200	Pls	NMOS-IC	5-Bit * 13-Segment Decoder, Driver	24-DIP				-
CT 7004		IC	Digital-Uhr/Digital Clock					-
CTP 1104	Ilt	Ge-P	LF P, 40/40/10V, 3A, 40W	23a	TO-3			AD 149, AL 102, AUY 19...20, 2SB449
CTP 1108	Ilt	Ge-P	=2N2061	23a	TO-3			*2N2061
CTP 1109	Ilt	Ge-P	=2N2062	23a	TO-3			*2N2062
CTP 1111	Ilt	Ge-P	LF P, 80/50/40V, 3A, 45W	23a	TO-3			AL 102, AUY 20, 2N1541...43, 2N1546...48
CTP 1500	Ilt	Ge-P	LF, S P, 100/60/80V, 15A, 50W(Tc=45°)	23a	TO-3			AUY 37, 2N1552, 2N1556, 2N1560
CTP 1503	Ilt	Ge-P	=CTP 1500: 80/50/60V	23a	TO-3			2N1551...52, 2N1555...56, 2N1559...60
CTP 1504	Ilt	Ge-P	=CTP 1500: 60/35/40V	23a	TO-3			2N1550...52, 2N1554...56, 2N1558...60
CTP 1508	Ilt	Ge-P	LF, S P, 40/20/20V, 15A, 50W(Tc=45°)	23a	TO-3			2N1549...52, 2N1553...56, 2N1557...60
CTP 1544	Ilt	Ge-P	LF, S P, 60/30/30V, 25A, 50W(Tc=45°)	23a	TO-3			2N1651...1653, 2N2285...2287
CTP 1545	Ilt	Ge-P	=CTP 1544: 80/40/30V	23a	TO-3			2N1652...1653, 2N2286...2287
CTP 1552	Ilt	Ge-P	LF, S P, 40/20/30V, 25A, 50W(Tc=45°)	23a	TO-3			2N1651...1653, 2N2285...2287
CTP 1553	Ilt	Ge-P	=CTP 1552: 100/50/30V	23a	TO-3			2N1652...1653, 2N2286...2287
CV		Si-N	=HC 1F2Q (SMD-Marking)	39	SOT-89			*HC 1...
CV		PIN-Di	=1SV234 (SMD-Marking)	35	SOT-23			*1SV234
CV		PIN-Di	=1SV246 (SMD-Marking)	35(2mm)	SOT-323			*1SV246
CV		Si-P	=XN 4404 (SMD-Marking)	46	SOT-163			*XN 4404
CV 12(B...E)		Thy	100...500V, 2A, Igt/Ih<1,5/<1mA	13e	TO-202	TAG 626-600 ⁴	17e	BT 100A/300R, BT 100/02
CVPU 2210	Ilt	NMOS-IC	CTV, NTSC Kammfilter-/Comb Filter Video-Processor	40-DIP				-
CVPU 2233	Ilt	NMOS-IC	CTV, NTSC Kammfilter-/Comb Filter Video-Processor	40-DIP				-
CVPU 2235	Ilt	NMOS-IC	CTV, NTSC Kammfilter-/Comb Filter Video-Processor	40-DIP				-
CVPU 2270	Ilt	NMOS-IC	CTV, NTSC Kammfilter-/Comp Filter Video-Processor	40-DIP				-
CW		Si-N/P+R	=XN 4381 (SMD-Marking)	46	SOT-163			*XN 4381
CW 01 B	Hit	Thy	100V, 0,2A(Tc=57°), 0,3A-, Igt/Ih=1/5mA	9b	(5x6x3mm)	(BRX 49) ⁴	7a	MCR 1906..., 2N1595...1599, TAG 2...
CW 01 C		Thy	=CW01B: 200V	9b	(5x6x3mm)	(BRX 49) ⁴	7a	MCR 1906..., 2N1595...1599, TAG 2...
CW 12 B	Hit	50Hz-Thy	100V, 0,2A(Tc=57°), Igt/Ih=1/5mA	7b	TO-92L	BRX 49	7a	MCR 1906..., 2N1595...1599, TAG 2...
CW 12 C		50Hz-Thy	=CW12C: 200V	7b	TO-92L	BRX 49	7a	MCR 1906..., 2N1595...1599, TAG 2...
CX...CZ								
CX		MOS-N-FET-d	=3SK227 (SMD-Marking)	44	SOT-143			*3SK227
CX		MOS-N-FET-d	=3SK271 (SMD-Marking)	44(2mm)	SOT-343			*3SK271
CX		Si-N	=HC 1A4A (SMD-Marking)	39	SOT-89			*HC 1...
CX 701	Mic	Si-N	TV-VA, 150/120V, 2/4A, 25W	17j	TO-220	2SD1138	17j	BD 239D, 2SD578, 2SD608(A), 2SD1138
CX 701 A		Si-N	=CX 701: 180/150V	17j	TO-220	2SD1138	17j	BD 239E, 2SD578, 2SD608A, 2SD1138
CX 702	Mic	Si-N	TV-HA, 160/80V, 5/8A, 40W	17j	TO-220	BU 406	17j	BU 104P, BU 406...408, 2SD823
CX 702 A		Si-N	=CX 702: 200/100V	17j	TO-220	BU 406	17j	BU 104P, BU 406...408, 2SD823
CX 703	Mic	Si-N	Vid, 160/160V, 0,1A, 0,625W, >50MHz	7e	TO-92	BF 420 A	7c	BF 422A, BF 420A, BFR 87...89, BFT 57...59
CX 703 A		Si-N	=CX 703: 200/200V	7e	TO-92	BF 420 A	7c	BF 420A, BF 422A, BFR 88...89, BFT 58...59
CX 703 B		Si-N	=CX 703: 250/250V	7e	TO-92	BF 420 A	7c	BF 420A, BF 422A, BFR 88, BFT 58
CX 704(A...C)	Mic	Si-N	LF, S P, 60/50V, 4/7A, 30W, >3MHz (CX754)	17j	TO-220	BD 243 C	17j	BD 243A, BD 535, BD 539A, BD 949
CX 705	Mic	Si-N	LF, S P, 55/45V, 7A, 75W, >0,5MHz	23a	TO-3	BD 245 C	18j	BD 245A, BC 311, BDV 91, 2N5873, ++
CX 705 A		Si-N	=CX 705: 70/60V	23a	TO-3	BD 245 C	18j	BD 245A, BD 313, BDV 93, 2N5874, ++
CX 754(A...C)	Mic	Si-P	LF, S P, 60/50V, 4/7A, 30W, >3MHz (CX704)	17j	TO-220	BD 244 C	17j	BD 244A, BD 536, BD 540A, BD 950
CX 901	Mic	Si-N	LF, Z-Diode (Ube=6,7...7,7V)	7e	TO-92			-
CX 904(B...E)	Mic	Si-N	Uni, ln, 45/40V, 0,1A, 0,3W, 200MHz (CX954)	7e	TO-92	BC 550	7a	BC 184, BC 413...414, BC 550, 2SC2675, ++
CX 906(A...D)	Mic	Si-N	LF Drv, 45/40V, 0,5A, 0,5W, 200MHz (CX956)	7e	TO-92	BC 337	7a	BC 337, BC 635, BC 637, BC 639, 2SC3377+
CX 908(B...D)	Mic	Si-N	LF Drv, 45/40V, 1A, 0,625W, 150MHz (CX958)	7e	TO-92	BC 337	7a	BC 337, BC 635, BC 635, BC 639, 2SD1225+
CX 917	Mic	Si-N	AM Inp, FM IF, 40V, 50mA, 0,25W, 330MHz	7e	TO-92	BF 255	7d	BF 240...241, BF 254, BF 494, BF 594, ++
CX 918	Mic	Si-N	FM/VHF, TV IF, 30V, 50mA, 620MHz, Gp=28dB(45MHz)	7e	TO-92	BF 198	7d	BF 198, BF 225, BF 310, BF 367, BF 596++
CX 954(B...E)	Mic	Si-P	Uni, ln, 45/40V, 0,1A, 0,3W, 200MHz (CX904)	7e	TO-92	BC 560	7a	BC 214, BC 415...416, BC 560, 2SA1137, ++
CX 956(A...D)	Mic	Si-P	LF Drv, 45/40V, 0,5A, 0,5W, 200MHz (CX906)	7e	TO-92	BC 327	7a	BC 327, BC 636, BC 638, BC 640, 2SA1515+
CX 958(B...D)	Mic	Si-P	LF Drv, 45/40V, 1A, 0,625W, 150MHz (CX908)	7e	TO-92	BC 327	7a	BC 327, BC 636, BC 638, BC 640, 2SB909++
CX 20026	Son	LIN-IC	TV, Stereo MPX-Decoder f. Japan, Ucc=8,5...9,5V	28-DIP				-
CX 20060	Son	LIN-IC	VC, Video Signal Switch, Ucc=9V	6-DIP				-
CX 20061	Son	LIN-IC	=CX 20060: Fig. *	8-SIP				-
CX 20095 A	Son	LIN-IC	Video Line Driver/Receiver, Ucc=4,8...5,2V	14-MDIP				-
CX 20100	Son	LIN-IC	CTV, RGB Interface	28-DIP				-
CX 20106 A	Son	LIN-IC	IR-FB, Empfängervorverst./Receiver Preamp., Ucc=5V	8-SIP				KA 2184
CX 20125	Son	LIN-IC	Video, Lumin. Proc., Dynamic Picture, Ucc=12V	8-SIP				-
CX 20126	Son	LIN-IC	TV, Stereo MPX-Decoder f. Japan, Ucc=8,5...9,5V	28-DIP				-
CX 20158	Son	LIN-IC	Video 2-Input Signal Switch, Buffer, Ucc=±5V	14-MDIP				-
CX 20159	Son	LIN-IC	TV, Stromversorgung/Power Supply, Ucc=3,8...10V	16-MDIP				-
CX 20183	Son	LIN-IC	SMD, TV, Video IF, Sound IF, Ucc=3...6V	24-MDIP				-
CX 23038	Son	CMOS-IC	Digital Video, progr. Shift Register, Udd=5V	28-DIP				-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
CXA 1011 M		LIN-IC	=CXA 1011P: SMD				-
CXA 1011 P	Son	LIN-IC	dbx-TV, Noise Reduction Decoder, Ucc=5...15V				16-MDIP
CXA 1012 AS	Son	LIN-IC	CTV, Y, Chroma, Sync. Signal Processor(NTSC, Japan)				16-DIP
CXA 1013 AS	Son	LIN-IC	CTV, Y, Chroma, Sync. Signal Processor(NTSC, USA)				48-SDIP
CXA 1019		LIN-IC	AM Radio, LF Inp/Out, Ucc=6(2...8.5)V				28-SDIP
CXA 1024 S	Son	LIN-IC	CTV, RGB Interface, Automatic White Balance				48-SDIP
CXA 1034 P		LIN-IC	Recorder, 2x LF Amp.				-
CXA 1044 BP	Son	LIN-IC	hi-res Display(820x700), RGB Predriver, Ucc=12V				18-DIP+g
CXA 1081(Q)	Son	LIN-IC	=KA 9201				KA 9201
CXA 1082(Q)	Son	MOS-IC	=KA 8309				48-MP
CXA 1101 P	Son	LIN-IC					KA 8309
CXA 1102	Son	LIN-IC					KA 2271
CXA 1110 BS	Son	LIN-IC	SMD, CTV, VC, Video IF, Sound IF, Ucc=8.5...9.5V				KA 22712
CXA 1113 AS	Son	LIN-IC	TV, Stereo MPX-Decoder, AF Ctrl., f. Japan, Ucc=9V				-
CXA 1114 M		LIN-IC	=CXA 1114P: SMD				-
CXA 1114 P	Son	LIN-IC	Audio/Video Switch, 4x In, 3x Out, I ² C-Bus, Ucc=9V				28-DIP
CXA 1124 BQ	Son	LIN-IC	=CXA 1124BS: Fig. →				48-MP
CXA 1124 BS	Son	LIN-IC	dbx-TV, MTS-Decoder, USA Standard, Ucc=4.7...10V				42-SDIP
CXA 1125 P	Son	LIN-IC	TV, CATV Tuner, VHF Os, Mx, TV IF, Ucc=5V				14-DIP
CXA 1126 S	Son	LIN-IC	TV, Stereo MPX-Decoder f. Japan, Ucc=8.5...9.5V				28-SDIP
CXA 1138 AM	Son	LIN-IC	=CXA 1138AS: SMD				28-MDIP
CXA 1138 AS	Son	LIN-IC	TV, VC, Stereo MPX-Decoder f. EIAJ, Ucc=4.5...9.5V				CXA 1438M
CXA 1145 M	Son	LIN-IC	=CXA 1145P: SMD				CXA 1438S
CXA 1145 P	Son	LIN-IC	Video, RGB-Encoder (NTSC/PAL), Ucc=5V				-
CXA 1158 P	Son	LIN-IC	Display, Deflection/Synchr. Generator, Ucc=±5V				24-DIP
CXA 1163	Son	LIN-IC					28-DIP
CXA 1165 AL	Son	LIN-IC	TV, CATV Tuner, VHF Os, Mx, TV IF, Ucc=7...9.5V				KA 22711
CXA 1165 M	Son	LIN-IC	=CXA 1165P: SMD				-
CXA 1165 P	Son	LIN-IC	TV, CATV Tuner, VHF Os, Mx, TV IF, Ucc=6.5...9.5V				16-SQP
CXA 1209 P	Son	LIN-IC	hi-res Display(1024x800), RGB Predriver, Ucc=12V				14-MDIP
CXA 1211 M	Son	LIN-IC	2x Wideband VCA, 0,1...20MHz, Ucc=4.5...5.5V				14-DIP
CXA 1213 AS,BS	Son	LIN-IC	CTV, Y, Chroma, Sync. Signal Processor (PAL/NTSC)				18-DIP+g
CXA 1214 P	Son	LIN-IC	CTV, SECAM-Decoder				8-MDIP
CXA 1218 S	Son	LIN-IC	TV++, NTSC/PAL-Decoder, Ucc=5V				48-SDIP
CXA 1219 M		LIN-IC	=CXA 1219P: SMD				24-DIP
CXA 1219 P	Son	LIN-IC	NTSC/PAL-Encoder, 75Ω-Drv, Audio Buffer, Ucc=5V				28-SDIP
CXA 1227 Q	Son	LIN-IC	TV++, SECAM-Decoder, Ucc=5V				24-MDIP
CXA 1228 S	Son	LIN-IC	TV++, NTSC/PAL-Decoder, Ucc=5V				24-DIP
CXA 1229 M		LIN-IC	=CXA 1229P: SMD				32-MP
CXA 1229 P	Son	LIN-IC	NTSC/PAL-Encoder, 75Ω-Drv, Audio Buffer, Ucc=5V				28-SDIP
CXA 1261 M	Son	LIN-IC	SMD, IR-FB, Empf.-Vorverst./Receiver Preamp., Ucc=5V				24-MDIP
CXA 1264 AS	Son	LIN-IC	dbx-TV, Zenith Audio-Decoder, US Standard, Ucc=9V				24-DIP
CXA 1268 P	Son	LIN-IC	Display, Deflection/Synchr. Generator, Ucc=±5V				8-MDIP
CXA 1271	Son	LIN-IC	=KA 9201Q				42-SDIP
CXA 1272	Son	MOS-IC	=KA 9221				28-DIP
CXA 1279 AS	Son	LIN-IC	TV, Sound Processor (Volume, Balance, Tone)				KA 9201Q
CXA 1299 P	Son	LIN-IC	hi-res Display(1280x1024), RGB Predriver, Ucc=12V				KA 9221
CXA 1314 P	Son	LIN-IC	Audio/Video Switch, 3x In, 2x Out, I ² C-Bus, Ucc=9V				-
CXA 1315 M		D/A-IC	=CXA 1315P: SMD				-
CXA 1315 P	Son	D/A-IC	TV, 8 Bit, 5 Channel, 4 I/O Ports, I ² C-Bus				22-SDIP
CXA 1355 L	Son	LIN-IC	TV, VHF/UHF/CATV Tuner, Ucc=8,1...9.9V				18-DIP+g
CXA 1365 S	Son	LIN-IC	Display, HA/VA Sync. Discrimination, Ucc=8.5...9.5V				16-DIP
CXA 1366 S	Son	LIN-IC	Display, HA/VA Deflection Correction, Ucc=±5V				16-MDIP
CXA 1385 Q	Son	LIN-IC	LCD CTV, Y, Chroma, Sync. Signal Processor				16-SQP
CXA 1387 S	Son	LIN-IC	CTV, Monitor, Aperture Compensation				28-SDIP
CXA 1401 M	Son	LIN-IC	SMD, DBS-Tuner, SAT PLL FM-Demodulation, 2. IF				28-SDIP
CXA 1403 AM	Son	LIN-IC	SMD, DBS-Tuner, SAT 4-Phase PSK Demodulation				32-MP
CXA 1409 AQ	Son	LIN-IC	VC++, Video Signal Driver, Buffer, Ucc=5V				30-SDIP
CXA 1410 M	Son	LIN-IC	VC, Video 5-Input Signal Selector, Ucc=5...9V				24-MDIP
CXA 1413 L	Son	LIN-IC	TV, VC, Vertical Correlator f. Dynamic Comb Filter				20-MDIP
CXA 1414 P	Son	LIN-IC	Audio/Video Switch, 3x In, 2x Out, I ² C-Bus, Ucc=9V				32-MP
CXA 1420 P	Son	LIN-IC	CTV, Aperture Compensation, Dyn. Picture, I ² C-Bus				24-MDIP
CXA 1434 P	Son	LIN-IC	Audio/Video Switch, 4x In, 3x Out, I ² C-Bus, Ucc=9V				8-SIP
CXA 1438 M	Son	LIN-IC	=CXA 1438S: SMD				16-DIP
CXA 1438 S	Son	LIN-IC	TV, VC, Stereo MPX-Decoder f. EIAJ, Ucc=8.5...9.5V				24-DIP
CXA 1450 M	Son	LIN-IC	VC, Video Signal Switch, Ucc=4...6V				28-DIP
CXA 1451 M	Son	LIN-IC	VC, Video 2-Input Signal Switch, Driver, Ucc=4...6V				28-MDIP
CXA 1464 AS	Son	LIN-IC	CTV, Y, Chroma, Sync. Signal Proc.(Japan Standard)				8-MDIP
CXA 1465 AS	Son	LIN-IC	=CXA 1464AS: USA Standard				16-MDIP
CXA 1470 AM		LIN-IC	=CXA 1470AS: SMD				48-SDIP
CXA 1470 AS	Son	LIN-IC	Display, HA/VA Deflection Compensation, Ucc=±5V				48-SDIP
CXA 1477 AS	Son	BiMOS-IC	CTV, Y, Chroma, Sync. Signal Processor, I ² C-Bus				28-MDIP
CXA 1485 Q	Son	LIN-IC	LCD CTV, RGB Driver f. TFT LCD Display, Ucc=14V				28-SDIP
CXA 1490 M	Son	LIN-IC	=CXA 1490S: SMD				32-MP
CXA 1490 S	Son	LIN-IC	TV, VC, Stereo MPX-Decoder f. EIAJ, Ucc=8.5...9.5V				28-MDIP
CXA 1518 Q		LIN-IC	=CXA 1518S: Fig. →				22-SDIP
CXA 1518 S	Son	LIN-IC	TV, Stereo MPX-Decoder, EIAJ Standard, Ucc=5V				32-MP
CXA 1519 M		LIN-IC	=CXA 1519S: SMD				22-SDIP
CXA 1519 S	Son	LIN-IC	=CXA 1438S: integr. D-FAX Elimination Filter				28-MDIP
CXA 1520 M		LIN-IC	=CXA 1520S: SMD				22-SDIP
CXA 1520 S	Son	LIN-IC	=CXA 1490S: integr. D-FAX Elimination Filter				28-MDIP
CXA 1521 M	Son	LIN-IC	Wideband(20MHz) Video Gain Control Amp., Ucc=4...6V				22-SDIP
CXA 1526 P	Son	LIN-IC	CTV, Dynamic Convergence, I ² C-Bus, Ucc=12V				8-MDIP
CXA 1534 Q	Son	LIN-IC	=CXA 1124BS: Fig. →				16-DIP
CXA 1534 S	Son	LIN-IC	dbx-TV, MTS-Decoder, USA Standard, Ucc=4.7...10V				48-MP
CXA 1545 AS	Son	LIN-IC	Audio/Video Switch, 5x In, 3x Out, I ² C-Bus, Ucc=9V				42-SDIP
CXA 1558 L	Son	LIN-IC	VC, Video 4-Input Signal Switch, Driver, Ucc=±5V				48-SDIP
CXA 1585 Q	Son	LIN-IC	TV++, RGB-Decoder (NTSC/PAL), Ucc=5V				16-SQP
CXA 1587 S	Son	LIN-IC	CTV, Y, Chroma, RGB Signal Processor (PAL/NTSC)				32-MP
CXA 1686 A	Son	LIN-IC	SMD, Digital TV, Clock Signal Generator, Ucc=5V				48-SDIP
CXA 1727 Q	Son	LIN-IC	TV, Camera, Wide TV ID Signal Additional/Detecting				30-MDIP
CXB 1010 G	Son	LIN-IC	Digital Video, 16x16 Bit Multiplier/Accumulator				32-MP
CXD 1050 A	Son	CMOS-IC	CRT, Screen Display, 128 Characters(12x16Dots)				85-PGA

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
CXD 1161	Son	CMOS-D/A-IC	=KDA 0316	20-DIP			KDA 0316
CXD 1167(O)	Son	MOS-IC	=KS 9210	80-MP			KS 9210
CXD 1229 Q	Son	CMOS-IC	Digital Video, Sync. Separation, AFC	48-MP			-
CXD 2011 Q	Son	CMOS-IC	Digital TV/VC, Digital Comb Filter (NTSC/PAL)	80-MP			-
CXD 2012 Q	Son	CMOS-IC	DBS-Tuner, Audio PCM Demodulator	80-MP			-
CXD 2018 Q	Son	CMOS-IC	CTV, VA Processor, Multi-Standard, HDTV, I ² C-Bus	48-MP			-
CXD 2020 Q	Son	CMOS-IC	Signal Processor f. MUSE-NTSC Converter	100-MP			-
CXD 2021 Q	Son	CMOS-IC	Time Conversion Processor f. MUSE-NTSC Converter	100-MP			-
CXD 2023 Q	Son	CMOS-IC	Digital TV/VC, Digital Comb Filter (NTSC)	80-MP			-
CXD 2024 Q	Son	CMOS-IC	Digital TV/VC, Digital Comb Filter (NTSC/PAL)	80-MP			-
CXD 2105 AQ	Son	CMOS-IC	Digital VC, Digital Comb Filter (NTSC/PAL/SECAM)	80-MP			-
CXD 2122 AQ	Son	CMOS-IC	TV/Camera, Video Aspect Ratio ID Signal De/Encoder	32-MP			-
CXD 2305 Q	Son	CMOS-D/A-IC	hi-res Display, 10 Bit, 50 Msps, RGB 3 Channel	100-MP			-
CXK 1202 Q	Son	CMOS-IC	Digital TV/VC, Digital Delay Line (NTSC/PAL/SECAM)	32-MP			-
CXK 1202 S		CMOS-IC	=CXK 1202Q: Fig. *	28-SDIP			-
CXK 1203 Q,R	Son	CMOS-IC	Digital TV/VC, Digital Line Memory(NTSC/PAL/SECAM) Q=12x12mm, R=7x7mm	48-MP			-
CXK 1206 AM,ATM	Son	CMOS-VRAM-IC	3-Port Dig. Video Signal Field Memory (NTSC/PAL)	38-SMDIP	(20x14mm)		-
CXD 1206 ATM		CMOS-VRAM-IC	=CXK 1206AM:	44-SSDIP	(18x10mm)		-
CXK 1207 M	Son	CMOS-VRAM-IC	3-Port Dig. Video Signal Field Memory (NTSC/PAL)	38-SMDIP			-
CXK 5864 AP/BP		sRAM-IC	MOS, 8k x 8Bit				-
CXK 48324 Q	Son	CMOS-VRAM-IC	3-Port Dig. Video Signal Field Memory (NTSC/PAL)	64-MP	(20x14mm)		-
CXK 48324 R		CMOS-VRAM-IC	=CXK 48324Q: Fig. *	80-MP	(12x12mm)		-
CXL 5509 M		CMOS-CCD-IC	=CXL 5509P: SMD	16-MDIP			-
CXL 5509 P	Son	CMOS-CCD-IC	Video, CCD Delay Line (NTSC)	16-DIP			-
CY		Si-N	=2SC2881-Y (SMD-Marking)	39	SOT-89		*2SC2881
CY		Si-N	=2SC3396 (SMD-Marking)	35	SOT-23		*2SC3396
CY		Si-N	=2SC4209-Y (SMD-Marking)	35	SOT-23		*2SC4209
CY		Si-N	=2SC4397 (SMD-Marking)	35(2mm)	SOT-323		*2SC4397
CY		Si-N	=2SC5087-Y (SMD-Marking)	44	SOT-143		*2SC5087
CY		MOS-P-FET-e	=2SJ186 (SMD-Marking)	39	SOT-89		*2SJ186
CY		Si-N	=BFS 18R (SMD-Marking)	35	SOT-23		*BFS 18R
CY		Si-N	=KTC4373-Y (SMD-Marking)	39	SOT-89		*KTC 4373
CYQ		Si-N	=2SC4661-Q (SMD-Marking)	35(2mm)	SOT-323		*2SC4661
CYR		Si-N	=2SC4661-R (SMD-Marking)	35(2mm)	SOT-323		*2SC4661
CYS		Si-N	=2SC4661-S (SMD-Marking)	35(2mm)	SOT-323		*2SC4661
CZ		Si-N	=BFS 19R (SMD-Marking)	35	SOT-23		*BFS 19R
D							
D....	JAP	...-N	*2SD....., z.B./e.g. "D731" = 2SD731 *	Japantypen			
D....	Sam	...-N	*KSD....., z.B./e.g. "D1616"=KSD1616 *	Samsung			
D....	Nec	IC	*µPD.... (NEC !)				
D		Si-P	=2SA1687 (SMD-Marking)	35(2mm)	SOT-323		*2SA1687
D 1	Hfo	Se-Di	Blitzschutz/Lightning Protection, Ubr=75V(400mA)	12	(17x20x6)		-
D 01		Si-Di	=SD 914 (SMD-Marking)	35	SOT-23		*SD 914
D 1		Si-Di	=BAW 63 (SMD-Marking)	35(2mm)	SOT-323		*BAW 63
D 1(p)		Si-N	=BCW 31 (SMD-Marking)	35	SOT-23		*BCW 31
D 1 G		Si-P	=KSA 812-G (SMD-Marking)	35	SOT-23		*KSA 812
D 1 G		Si-P	=HN 1A01F-GR (SMD-Marking)	46	SOT-163		*HN 1A01F
D 1 G		Si-P	=HN 1A01FU-GR (SMD-Marking)	46(2mm)	SOT-363		*HN 1A01FU
D 1 L		Si-P	=KSA 812-L (SMD-Marking)	35	SOT-23		*KSA 812
D 10		Si-P	=KSA 812-O (SMD-Marking)	35	SOT-23		*KSA 812
D 1 Y		Si-P	=KSA 812-Y (SMD-Marking)	35	SOT-23		*KSA 812
D 1 Y		Si-P	=HN 1A01F-Y (SMD-Marking)	46	SOT-163		*HN 1A01F
D 1 Y		Si-P	=HN 1A01FU-Y (SMD-Marking)	46(2mm)	SOT-363		*HN 1A01FU
D 2		Si-Di	=BAW 63A (SMD-Marking)	35(2mm)	SOT-323		*BAW 63A
D 2(p)		Si-N	=BCW 32 (SMD-Marking)	35	SOT-23		*BCW 32
D2T 918	Tix	Si-N	Dual, 30/15V, 0.05A, >600MHz, (=2x2N918)	TO-77	(CBE-EBC-)		2N3423...3424
D2T 2218	Tix	Si-N	Dual, 60/30V, 0.8A, >250MHz, hFE>40, (=2x2N2218)	TO-77	(CBE-EBC-)		2N3409...3411
D2T 2218A		Si-N	=D2T 2218: 75/40V, >300MHz, (=2x2N2218A)	TO-77	(CBE-EBC-)		(2N3409...3411) ⁷
D2T 2219	Tix	Si-N	=D2T 2218: hFE>100, (=2x2N2219)	TO-77	(CBE-EBC-)		2N3409...3411
D2T 2219A		Si-N	=D2T 2218A: hFE>100, (=2x2N2219A)	TO-77	(CBE-EBC-)		(2N3409...3411) ⁷
D2T 2904(A)	Tix	Si-P	Dual, 60/40V, 0.6A, >200MHz, hFE>40, (=2x2N2904...)	TO-77	(CBE-EBC-)		2N4015...4016
D2T 2905(A)	Tix	Si-P	=D2T2904: hFE>100, (=2x2N2905...)	TO-77	(CBE-EBC-)		2N4015...4016
D 3		Si-Di	=1SS 187 (SMD-Marking)	35	SOT-23		*2SS 187
D 3		Si-Di	=BAW 63B (SMD-Marking)	35(2mm)	SOT-323		*BAW 63B
D 3(p)		Si-N	=BCW 33 (SMD-Marking)	35	SOT-23		*BCW 33
D 4		Si-P	=2SA1252-4 (SMD-Marking)	35	SOT-23		*2SA1252
D 4		Si-Di	=BAW 63B (SMD-Marking)	35(2mm)	SOT-323		*BAW 64
D 4		Si-N	=BCW 31R (SMD-Marking)	35	SOT-23		*BCW 31R
D 5		Si-P	=2SA1252-5 (SMD-Marking)	35	SOT-23		*2SA1252
D 5		Si-N	=2SC1622-D5 (SMD-Marking)	35	SOT-23		*2SC1622
D 5		Si-Di	=BAW 65 (SMD-Marking)	35(2mm)	SOT-323		*BAW 65
D 5		Si-N	=BCW 32R (SMD-Marking)	35	SOT-23		*BCW 32R
D 5 E29	Gen	UJT-P	Iv>25mA, Ip<25µA, η<0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 E35	Gen	UJT-P	Iv>10mA, η<0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 E36	Gen	UJT-P	Iv>10mA, η<0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 E37	Gen	UJT-P	35V, 50mA, Iv>4mA, Ip<25µA, η=0,47...0,85, Rbb<12kΩ	5a	TO-72		-
D 5 E43	Gen	UJT-P	35V, 50mA, Iv>6mA, Ip<2µA, η=0,68...0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 E44	Gen	UJT-P	35V, 50mA, Iv>4mA, Ip<5µA, η=0,68...0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 E45	Gen	UJT-P	35V, 50mA, Iv>8mA, Ip<2µA, η=0,68...0,82, Rbb<9,1kΩ	5a	TO-72		-
D 5 K1	Gen	UJT-N	30V, 150mA, Iv>1mA, Ip<5µA, η=0,58...0,6, Rbb<8,2kΩ	5a	TO-72		2N6114
D 5 K2	Gen	UJT-N	20V, 150mA, Iv>1mA, Ip<15µA, η=0,58...0,6, Rbb<15kΩ	5a	TO-72		2N6115
D 6		Si-P	=2SA1252-6 (SMD-Marking)	35	SOT-23		*2SA1252
D 6		Si-N	=2SC1622-D6 (SMD-Marking)	35	SOT-23		*2SC1622
D 6		Si-Di	=BAW 66 (SMD-Marking)	35(2mm)	SOT-323		*BAW 66
D 6		Si-N	=BCW 33R (SMD-Marking)	35	SOT-23		*BCW 33R
D 7		Si-P	=2SA1252-7 (SMD-Marking)	35	SOT-23		*2SA1252
D 7		Si-N	=2SC1662-D7 (SMD-Marking)	35	SOT-23		*2SC1662
D 7		Si-Di	=BAW 67 (SMD-Marking)	35(2mm)	SOT-323		*BAW 67
D 7(p)		Si-N	=BCF 32 (SMD-Marking)	35	SOT-23		*BCF 32
D 8		Si-N	=2SC1662-D8 (SMD-Marking)	35	SOT-23		*2SC1662
D 8		Si-Di	=BAW 68 (SMD-Marking)	35(2mm)	SOT-323		*BAW 68

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
D 8		Si-N	=BCF 33 (SMD-Marking)	35	SOT-23		*BCF 33
D 12 E026	Gen	Si-N	Dual, 45/30V, 0.03A, >30MHz	TO-77	(CBE-EBC-)		BFW 39...40, 2N2913...2918
D 12 E109	Gen	Si-N	Dual, 60V, 0.05A	TO-71	(CBE-EBC-)		(2N2919...2920) ⁶
D 12 E126	Gen	Si-N	=D12E026:	TO-71	(CBE-EBC-)		(BFW 39...40, 2N2913...2918) ⁶
D 13 H1	Gen	SAS	Ub=+7...+9/-14...-18V, Itsm=+1A/0.5A, Is<80µA	7n	TO-92		
			Igt/Ih<0.07/<0.25mA				
D 13 H2		SAS	=D 13 H1: Is<100µA	7n	TO-92		
D 13 K1	Gen	PUT	=2N6116	2a	TO-18		*2N6116
D 13 K2	Gen	PUT	=2N6117	2a	TO-18		*2N6117
D 13 K3	Gen	PUT	=2N6118	2a	TO-18		*2N6118
D 13 T1	Gen	PUT	=2N6027:	7a	TO-92		*2N6027
D 13 T2	Gen	PUT	=2N6028:	7a	TO-92		*2N6028
D 13 V	Gen	Z-IC	+10...40V, 40mA	2	TO-5		
D 15		Si-N	=2SC1622A-D15 (SMD-Marking)	35	SOT-23		*2SC1622A
D 15		Si-N	=2SC4180-D15 (SMD-Marking)	35(2mm)	SOT-323		*2SC4180
D 16		Si-N	=2SC1662A-D16 (SMD-Marking)	35	SOT-23		*2SC1662A
D 16		Si-N	=2SC4180-D16 (SMD-Marking)	35(2mm)	SOT-323		*2SC4180
D 16 E7	Gen	Si-N	25V, 0.2W, 135MHz	7	TO-98		-
D 16 E9	Gen	Si-N	30V, 0.2W, 135MHz	7	TO-98		-
D 16 G6	Gen	Si-N	UHF Os, 30V, 25mA, 0.2W, >500MHz	7c	TO-98		BF 377...78, BF 763, 2N2857, 2SC3776...77+
D 16 K1...K4	Gen	Si-N	VHF, 30V, 25mA, 0.2W, 580...650MHz	7c	TO-98		BF 225, BF 314, BF 496, BF 502...503, ++
D 16 P1...P4	Gen	Si-N-Darl	LF, 18...20V, 0.2/0.5A, 0.32W, >60MHz, hFE>2000	7c	TO-98		BC 517, BC 875, MPS-A25, 2SC4017, ++
D 17		Si-N	=2SC1662A-D17 (SMD-Marking)	35	SOT-23		*2SC1662A
D 17		Si-N	=2SC4180-D17 (SMD-Marking)	35(2mm)	SOT-323		*2SC4180
D 18		Si-N	=2SC1662A-D18 (SMD-Marking)	35	SOT-23		*2SC1662A
D 18		Si-N	=2SC4180-D18 (SMD-Marking)	35(2mm)	SOT-323		*2SC4180
D 21		N-FET	=2SK931-21 (SMD-Marking)	35	SOT-23		*2SK931
D 22		N-FET	=2SK931-22 (SMD-Marking)	35	SOT-23		*2SK931
D 23		N-FET	=2SK931-23 (SMD-Marking)	35	SOT-23		*2SK931
D 24		N-FET	=2SK931-24 (SMD-Marking)	35	SOT-23		*2SK931
D 24 A3391(A)	Gen	Si-N	Min, 25/25V, 0.1A, 120MHz	-24c			BC 122...123
D 24 A3392	Gen	Si-N	Min, 25/25V, 0.1A, 140MHz	-24c			BC 122...123
D 24 A3393	Gen	Si-N	Min, 25/25V, 0.1A, 140MHz	-24c			BC 122...123
D 24 A3394	Gen	Si-N	Min, 25/25V, 0.1A, 140MHz	-24c			BC 122...123
D 24 A3900(A)	Gen	Si-N	Min, 18/18V, 0.1A, 160MHz	-24c			BC 122...123
D 25		Si-N	=2SC3115-D25 (SMD-Marking)	35	SOT-23		*2SC3115
D 25		N-FET	=2SK931-25 (SMD-Marking)	35	SOT-23		*2SK931
D 26		Si-N	=2SC3115-D26 (SMD-Marking)	35	SOT-23		*2SC3115
D 26 B1...B2	Gen	Si-N	Min, S, 40V, <12/18ns	36b	(2mm0)		-
D 26 C1...C5	Gen	Si-N	Min, Uni, 25V, 0.09W	36b	(2mm0)		BC 122...123
D 26 E1...E7	Gen	Si-N	Min, LF, 18...45V, 0.09W	36b	(2mm0)		BC 123
D 26 G1	Gen	Si-N	Min, VHF/UHF, 30/15V, >600MHz, Gp>15dB(200MHz)	36b	(2mm0)		-
D 26 P1...P3	Gen	Si-N-Darl	Min, 18...25V, 0.09W, hFE>6000	36b	(2mm0)		-
D 27		Si-N	=2SC3115-D27(SMD-Marking)	35	SOT-23		*2SC3115
D 27 C1	Gen	Si-N	*D42C5				
D 27 C2	Gen	Si-N	*D42C4				
D 27 C3	Gen	Si-N	*D42C2				
D 27 C4	Gen	Si-N	*D42C1				
D 27 D1	Gen	Si-P	*D43C5				
D 27 D2	Gen	Si-P	*D43C4				
D 27 D3	Gen	Si-P	*D43C2				
D 27 D4	Gen	Si-P	*D43C1				
D 28		Si-N	=2SC3115-D28 (SMD-Marking)	35	SOT-23		*2SC3115
D 28 A5...A13	Gen	Si-N	LF Drv,Out, 35...50V, 0.5A	13	TO-202		BD 385, BD 415, BD 827, BD 841
D 28 B	Gen	Si-N	S,Vid, 150V, 0.1A	13	TO-202		BF 615, BF 617, BF 857...859
D 28 C1...C8	Gen	Si-N	*D40C1...C8				
D 28 D1...D10	Gen	Si-N	*D40D1...D10				
D 28 E	Gen	Si-N	*D40N3				
D 29 A4...A12	Gen	Si-P	Uni, 35...60V, 0.5A, 0.33W	7c	TO-98		BC 327, BC 638, BC 640
D 29 E1...E10(J1)	Gen	Si-P	LF Drv 35...70V, 0.75A, 0.5W	7c	TO-98		BC 327, BC 638, BC 640
D 29 F1...F7	Gen	Si-P	Uni, 40...60V, 0.1A, 0.36W, >90MHz	7c	TO-18		BC 212, BC 257, BC 307, BC 556, ++
D 30 A1...A5	Gen	Si-P	Min, Uni, 25V, 0.09W	36b	(2mm0)		BC 202...203
D 31 B	Gen	Si-P	*D40D				
D 32	Tag	Diac	Ub=28...36V, Ib<0.3mA, Itsm=1A	31I	DO-7		A 9903
D 32 H1...H9	Gen	Si-N	Uni, 60...100V, 0.5A, 0.5W	7a	SOT-30		BC 639, 2N3700...3701, 2SD667
D 32 K1...K2	Gen	Si-N	LFS Drv, 30...50V, 0.75A, 0.5W	7a	SOT-30		BC 337, BC 637, BC 639, 2N3700...3701, ++
D 32 L1...L6	Gen	Si-N-Darl	25...40V, 0.5A, >80MHz, hFE>2000	7a	SOT-30		BC 517, BC 875, BC 877, BC 879, MPS-A25
D 32 P1...P4	Gen	Si-N	AM/FM IF, 40V, 50mA, >120...>490MHz	7a	SOT-30		BF 240...241, BF 254, BF 494, BF 594, ++
D 32 S1...S10	Gen	Si-N	LF, 30...60V, 0.1A, 0.4W	7a	SOT-30		BC 174, BC 182, BC 190, BC 546, ++
D 32 W7...W14	Gen	Si-N	Uni, 100...120V, 0.1A, 0.4W, >75MHz	7a	SOT-30		2SC2240, 2SC2459, 2SC3245
D 33 D1...D6	Gen	Si-N	Uni, 40...50V, 0.5A, 0.4W	7c	TO-98		BC 337, BC 637, BC 639, 2N3700...01, ++
D 33 D21...D30(J1)	Gen	Si-N	LF Drv, 35...70V, 0.75A, 0.5W	7c	TO-98		BC 337, BC 637, BC 639, 2N3700...01, ++
D 33 K1...K3	Gen	Si-N	Uni, 50...80V, 1A, 0.33W	7c	TO-98		BC 637, BC 639, 2N3700...01, 2SD667, ++
D 34 C1...C6	Gen	Si-P-Darl	25...40V, 0.5A, >80MHz, hFE>2000	7a	SOT-30		BC 516, BC 876, BC 878, BC 880, MPS-A75
D 34 J1...J9	Gen	Si-P	Uni, 60...100V, 0.5A, 0.5W, >60MHz	7a	SOT-30		BC 640, 2SA965, 2SB647
D 38 H1...H9	Gen	Si-N	LF Drv, 60...100V, 0.5A, 0.5A, >80MHz	7e	TO-92		BC 637, BC 639, 2N3700...01, 2SD667, ++
D 38 L1...L6	Gen	Si-N-Darl	25...40V, 0.5A, >80MHz	7e	TO-92		BC 517, BC 875, BC 877, BC 879, MPS-A25
D 38 S1...S10	Gen	Si-N	Uni, 30...60V, 0.1A, 0.4W, 100MHz	7e	TO-92		BC 174, BC 182, BC 190, BC 546, ++
D 38 V1...V3	Gen	Si-N	S, Vid, 200...300V, 0.1A, 0.5W, >50MHz	7e	TO-92		BF 298...299, BFR 88...89, BFT 58...59, ++
D 38 W7...W14	Gen	Si-N	LFS, 100...120V, 0.1A, 0.4W, >75MHz	7e	TO-92		2SC2240, 2SC2459, 2SC3245
D 39 C1...C6	Gen	Si-P-Darl	25...40V, 0.5A, >80MHz, hFE>2000	7e	TO-92		BC 516, BC 876, BC 878, BC 880, MPS-A75
D 39 J1...J9	Gen	Si-P	LF Drv, 60...100V, 0.5A, 0.5W, >60MHz	7e	TO-92		BC 638, BC 640, 2SA965, 2SB647
D 40 C1...C8(U)	Gen	Si-N-Darl	LFS P, 30...50V, 0.5A, 6.25W, 75MHz	13m	TO-202		MPS-U45
D 40 D1...D14(U)	Gen	Si-N	LFS P, 45...90V, 1A, 6.25W, 200MHz	13m	TO-202	(2SC4135) ⁴	BD 419, BD 519, BD 529
D 40 E1...E7	Gen	Si-N	LFS P, 45...90V, 2A, 8W, 230MHz	13m	TO-202	(2SC4135) ⁴	BD 525, BD 527, BD 529
D 40 K1...K4	Gen	Si-N-Darl	LFS P, 30...50V, 2A, 10W, 75MHz, hFE>10k	13m	TO-202	(BD 679) ⁴	MPS-U45
D 40 N1...N5(U)	Gen	Si-N	S/Vid, 250...300V, 0.1A, 6.25W, 80MHz	13m	TO-202	MPS-U10	BF 382, BF 461...462, MPS-U10, 2SC1758, ++
D 40 P1...P5(U)	Gen	Si-N	Vid, 200...300V, 0.5A, 6.25W, >50MHz	13m	TO-202	MPS-U10	BF 382, BF 461...462, MPS-U10
D 40 V1...V6	Gen	Si-N	S/Vid, 300...400V, 0.1A, >50MHz	13m	TO-202	(MPS-U10)	BF 462, (BF 881) ⁵
D 41 D1...D14(U)	Gen	Si-P	LFS P, 45...90V, 1A, 6.25W, 150MHz	13m	TO-202	(2SA1593) ⁴	BD 420, BD 520, BD 530
D 41 E1...E7	Gen	Si-P	LFS P, 40...90V, 2A, 8W, 175MHz	13m	TO-202	(2SA1593) ⁴	BD 526, BD 528, BD 530
D 41 K1...K4	Gen	Si-P-Darl	LFS P, 30...50V, 2A, 10W, 100MHz, hFE>10k	13m	TO-202	(BD 680) ⁴	MPS-U95
D 42 C1...C12(J,U)	Gen	Si-N	LFS P, 40...90V, 3A, 12.5W, 50MHz	13j	TO-202	(BD 243 C) ⁴	(BDV 10...12) ⁶

Original	Fabric.	Constr.	Info	{Cmpl. Fig.	JAEGER	Fig.	International
D 42 D1...D6	Gen	Si-N-Darl	LFS P, 50...90V, 4A, 12W, 50MHz	13m			
D 42 R1...R2	Gen	Si-N	Vid P, 250...300V, 1A, 55MHz	13j			
D 42 T1...T8	Gen	Si-N	S/Vid P, 300...400V, 2A, 15W, 45MHz	13m, 13j			
D 43 C1...C12(J,U)	Gen	Si-P	LFS P, 40...90V, 3A, 12.5W, 40MHz	13j			
D 43 D1...D6	Gen	Si-P-Darl	LFS P, 50...90V, 4A, 12W, 50MHz, hFE=10k	13m			
D 44 C1...C12	Gen	Si-N	LFS P, 40...90V, 4A, 30W, 50MHz	17j			
D 44 D1...D6	Gen	Si-N-Darl+Di	LFS P, 50...90V, 6A, 30W, 50MHz, hFE>2k	17j			
D 44 E1...E3	Gen	Si-N-Darl	LFS P, 40...80V, 10A, 50W, hFE=1000	17j			
D 44 H1...H11	Gen	Si-N	LFS P, 30...80V, 10A, 50W, 50MHz	17j			
D 44 Q1...Q5	Gen	Si-N	S P, 200...300V, 4A, 31W, 50MHz	17j			
D 44 R1...R8	Gen	Si-N	LFS P, 400...500V, 1A, 31W, 40MHz	17j			
D 44 T1...T8	Gen	Si-N	S P, 300...400V, 2A, 45MHz	17j			
D 44 TD3...TD5	Gen	Si-N	S P, lo-sat, 400...600V, 2A, 50W	17j			
D 44 TE3...TE5	Gen	Si-N	LFS P, lo-sat, 400...600V, 4A, 75W	17j			
D 44 TQ1...TQ2	Gen	Si-N	S P, SMPS, 650...750V, 12A, 100W	17j			
D 44 VH1...VH10	Gen	Si-N	S P, lo-sat, 50...100V, 15A, 83W, 50MHz	17j			
D 44 VM1...VM10	Gen	Si-N	S P, lo-sat, 50...100V, 8A, 50W, 50MHz	17j			
D 45		Si-Di	=BA 170	31a			
D 45 C1...C12	Gen	Si-P	LFS P, 40...90V, 4A, 30W, 40MHz	17j			
D 45 D1...D6	Gen	Si-P-Darl+Di	LFS P, 50...90V, 6A, 30W, 50MHz, hFE>2k	17j			
D 45 E1...E3	Gen	Si-P-Darl	LFS P, 40...80V, 10A, 50W, hFE=1000	17j			
D 45 H1...H12	Gen	Si-P	LFS P, 30...80V, 10A, 50W, 40MHz	17j			
D 45 VH1...VH10	Gen	Si-P	S P, lo-sat, 40...100V, 15A, 83W, 50MHz	17j			
D 45 VM1...VM10	Gen	Si-P	S P, lo-sat, 50...100V, 8A, 50W, 50MHz	17j			
D 46 TQ1...TQ2	Gen	Si-N	S P, 650...750V, 12A, 110W	18j			
D 47		Z-Di	=BZX 84/C3V9 (SMD-Marking)	35			
D 48		Z-Di	=BZX 84/C4V3 (SMD-Marking)	35			
D 49		Si-Di	=BAY 84 (SMD-Marking)	35			
D 51		Si-N	=2SD780A-D51 (SMD-Marking)	35			
D 52		Si-Di	=BY 133	31a			
D 52		Si-N	=2SD780A-D52 (SMD-Marking)	35			
D 52		Thy	=SoBRY55/30 (SMD-Marking)	35			
D 53		Si-N	=2SD780A-D53 (SMD-Marking)	35			
D 53		Si-Di	=BAY 85 (SMD-Marking)	35			
D 54		Z-Di	=BZX 84/C3V3 (SMD-Marking)	35			
D 54		Si-N	=2SD780A-D54 (SMD-Marking)	35			
D 54 A7D	Gen	Si-N-Darl+Di	Hammer Drv, 100/100V, 7A, 30W, hFE=2...15k	17c			
D 54 D6D	Gen	Si-N-Darl+Di	S P, 600/400V, 6A, 25W, hFE>600	17c			
D 54 FY7D	Gen	Si-N-Darl+Di	Hammer Drv, 80/80V, 7A, 30W, hFE>2k...15k	17c			
D 54 H6D	Gen	Si-N-Darl	S P, 300/250V, 6A, 25W, hFE>2000	17c			
D 55		Si-N	=2SD780A-D55 (SMD-Marking)	35			
D 55 A7D	Gen	Si-N-Darl+Di	Hammer Drv, 100/100V, 7A, 30W, hFE>2k...15k	17c			
D 55 FY7D	Gen	Si-N-Darl+Di	Hammer Drv, 80/80V, 7A, 30W, hFE>2k...15k	17c			
D 56 W1...W2	Gen	Si-N	S P, 1400V, 5A, 78W	23a			
D 62		Si-Di	=BAT 53 (SMD-Marking)	35			
D 64		Z-Di	=BZX 84/C3V6 (SMD-Marking)	35			
D 64 DS5...DS7	Gen	Si-N-Darl+Di	S P, 500...700V, 20A, 125W, hFE>100	23a			
D 64 DV5...DV7	Gen	Si-N-Darl+Di	S P, 500...700V, 50A, 185W, hFE=100	23a			
D 64 ES5...ES7	Gen	Si-N-Darl+Di	=D64DS: integr. Speedup Diode	23a			
D 64 EV5...EV7	Gen	Si-N-Darl+Di	=D64DV: integr. Speedup Diode	23a			
D 64 TS3...TS5	Gen	Si-N	S P, 195W	23a			
D 64 VS3...VS5	Gen	Si-N	S P, 450...550V, 15A, 195W	23a			
D 65		Thy	=SoBRY55/30R (SMD-Marking)	35			
D 66 DS5...DS7	Gen	Si-N-Darl+Di	=D64DS5...7: Iso, 62.5W	66b			
D 66 DV5...DV7	Gen	Si-N-Darl+Di	=D64DV5...7: Iso, 125W	66b			
D 66 DW1...DW3	Gen	Si-N-Darl+Di	S P, 800...900V, 50A, 167W	66b			
D 66 ES5...ES7	Gen	Si-N-Darl+Di	=D64ES5...7: Iso, 62.5W	66b			
D 66 EV5...EV7	Gen	Si-N-Darl+Di	=D64EV5...7: Iso, 125W	66b			
D 66 EW1...EW3	Gen	Si-N-Darl+Di	=D66DW1...3: integr. Speedup Diode	66b			
D 66 GV5...GV7	Gen	Si-N-Darl+Di	S P, 600...700V, 50A, 125W, Speedup Diode	66b			
D 66		Thy	=SoBRY55/60 (SMD-Marking)	35			
D 67		Thy	=SoBRY55/60R (SMD-Marking)	35			
D 67 DE5...DE7	Gen	Si-N-Darl+Di	S P, 500...700V, 100A, 312W				
D 67 FP5...FP7	Gen	Si-N-Darl+Di	S P, 500...700V, 100A, 312W				
D 70 F2T1	Gen	Si-N	SMD, 50/50V, 2A, 100/1100ns, sat<0.5A(1A)	ID71F2T1 39b			
D 70 G.05T1	Gen	Si-N	SMD, S, 200/150V, 0.05A	ID71G.05T1 39b			
D 70 Y.8T1	Gen	Si-N	SMD, LF, 35/30V, 0.8A	ID71Y.8T1 39b			
D 70 Y1.5T1	Gen	Si-N	SMD, LF, 30/30V, 1.5A	ID71Y1.5T1 39b			
D 71		Si-N	=BCW 60A (SMD-Marking)	35			
D 71 F2T1	Gen	Si-P	SMD, 50/50V, 2A, 100/1100ns, sat<0.5V(1A)	ID70F2T1 39b			
D 71 G.05T1	Gen	Si-P	SMD, S, 150/150V, 0.05A	ID70G.05T1 39b			
D 71 Y.8T1	Gen	Si-P	SMD, LF, 35/30V, 0.8A	ID70Y.8T1 39b			
D 71 Y1.5T1	Gen	Si-P	SMD, LF, 30/30V, 1.5A	ID70Y1.5T1 39b			
D 72		Si-N	=BCW 60B (SMD-Marking)	35			
D 72 F5T1...2	Gen	Si-N	60/50V, 5A, 20W, sat<0.4V(3A), 100/1100ns	ID73F5T... 30j			
D 72 FY4D1...2	Gen	Si-N-Darl+Di	100/80V, 4A, 15W, hFE>2000, 200/2100ns	ID73FY4D... 30j			
D 72 K3D1...2	Gen	Si-N-Darl+Di	60/40V, 3A, 15W, hFE>2000, 100/1200ns	ID73K3D... 30j			
D 72 Y1.5D1...2	Gen	Si-N-Darl	Uni, 30V, 1.5A, 10W, hFE>4000, 180/900ns	30j			
D 73		PIN-Di	=BA 579A (SMD-Marking)	35			
D 73		Si-N	=BCW 60C (SMD-Marking)	35			
D 73 F5T1...2	Gen	Si-P	60/50V, 5A, 20W, 100/1100ns, sat<0.4V(3A)	ID72F5T... 30j			
D 73 FY4D1...2	Gen	Si-P-Darl+Di	100/80V, 4A, 15W, 150/1200ns, hFE>2000	ID72FY4D... 30j			
D 73 K3D1...2	Gen	Si-P-Darl+Di	60/40V, 3A, 15W, hFE>2000, 300/850ns	ID72K3D... 30j			
D 74		PIN-Di	=BA 579C (SMD-Marking)	35			
D 74		Si-N	=BCW 60D (SMD-Marking)	35			
D 74...D 78...	Gen	Si-N/P	General Electric: Transistor-Arrays				
D 75		PIN-Di	=BA 579S (SMD-Marking)	35			
D 76		Si-Di	=BAR 18 (SMD-Marking)	35			
D 77		Si-N	=BCF 32R (SMD-Marking)	35			
D 78		Si-Di	=1N4148	31a			
D 81		Si-Di	=BAR 43A (SMD-Marking)	35			
D 81		Si-N	=BCF 33R (SMD-Marking)	35			
D 82		Si-Di	=BAR 43C (SMD-Marking)	35			

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
D 83		Si-Di	=BB 503DK (SMD-Marking)	35		SOT-23	•BB 503DK
D 84		Si-Di	=BAT 18DK (SMD-Marking)	35		SOT-23	•BAT 18DK
D 85		Si-Di	=BAT 17DS (SMD-Marking)	35		SOT-23	•BAT 17DS
D 91		Si-N	=BCV 61 (SMD-Marking)	44		SOT-143	•BCV 61
D 92		Si-N	=BCV 61A (SMD-Marking)	44		SOT-143	•BCV 61
D 93		Si-N	=BCV 61B (SMD-Marking)	44		SOT-143	•BCV 61
D 94		Si-Di	=BAR 42 (SMD-Marking)	35		SOT-23	•BAR 42
D 94		Si-N	=BCV 61C (SMD-Marking)	44		SOT-143	•BCV 61
D 95		Si-Di	=BAR 43 (SMD-Marking)	35		SOT-23	•BAR 43
D 95		Si-N	=BCV 63 (SMD-Marking)	44		SOT-143	•BCV 63
D 96		Si-N	=BCV 63B (SMD-Marking)	44		SOT-143	•BCV 63
D 96		Si-Di	=BAS 70-04 (SMD-Marking)	35		SOT-23	•BAS 70-04
D 97		Si-Di	=BAS 70-05 (SMD-Marking)	35		SOT-23	•BAS 70-05
D 98		Si-Di	=BAS 70-06 (SMD-Marking)	35		SOT-23	•BAS 70-06
D 100 C,D	Hfo	TTL-Logic	=... 7400 (TTL)	14-DIC,DIP			... 7400... (TTL)
D 103 C,D	Hfo	TTL-Logic	=... 7403 (TTL)	14-DIC,DIP			... 7403... (TTL)
D 104 C,D	Hfo	TTL-Logic	=... 7404 (TTL)	14-DIC,DIP			... 7404... (TTL)
D 108 C,D	Hfo	TTL-Logic	=... 7408 (TTL)	14-DIC,DIP			... 7408... (TTL)
D 110 C,D	Hfo	TTL-Logic	=... 7410 (TTL)	14-DIC,DIP			... 7410... (TTL)
D 118		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 120 C,D	Hfo	TTL-Logic	=... 7420 (TTL)	14-DIC,DIP			... 7420... (TTL)
D 121 C,D	Hfo	TTL-Logic	=... 74121 (TTL)	14-DIC,DIP			... 74121... (TTL)
D 122 D	Hfo	LIN-IC	2-Kanal Leseverstärker/2-Channel Read Amp.	16-DIP			SN 7522N
D 123 D	Hfo	LIN-IC	2-Kanal Leseverstärker/2-Channel Read Amp.	16-DIP			SN 7523N
D 126 C,D	Hfo	TTL-Logic	=... 7426 (TTL)	14-DIC,DIP			... 7426... (TTL)
D 129		Si-Di	=BA 127	31a	1N4148	31a	•BA 127
D 130 C,D	Hfo	TTL-Logic	=... 7430 (TTL)	14-DIC,DIP			... 7430... (TTL)
D 140 C,D	Hfo	TTL-Logic	=... 7440 (TTL)	14-DIC,DIP			... 7440... (TTL)
D 146 C,D	Hfo	TTL-Logic	=... 7446 (TTL)	16-DIC,DIP			... 7446... (TTL)
D 147		C-Di	=BA 136	31a			•BA 136
D 147 C,D	Hfo	TTL-Logic	=... 7447 (TTL)	16-DIC,DIP			... 7447... (TTL)
D 150 C,D	Hfo	TTL-Logic	=... 7450 (TTL)	14-DIC,DIP			... 7450... (TTL)
D 151 C,D	Hfo	TTL-Logic	=... 7451 (TTL)	14-DIC,DIP			... 7451... (TTL)
D 153 C,D	Hfo	TTL-Logic	=... 7453 (TTL)	14-DIC,DIP			... 7453... (TTL)
D 154 C,D	Hfo	TTL-Logic	=... 7454 (TTL)	14-DIC,DIP			... 7454... (TTL)
D 160 C,D	Hfo	TTL-Logic	=... 7460 (TTL)	14-DIC,DIP			... 7460... (TTL)
D 172 C,D	Hfo	TTL-Logic	=... 7472 (TTL)	14-DIC,DIP			... 7472... (TTL)
D 174 C,D	Hfo	TTL-Logic	=... 7474 (TTL)	14-DIC,DIP			... 7474... (TTL)
D 175 C,D	Hfo	TTL-Logic	=... 7475 (TTL)	16-DIC,DIP			... 7475... (TTL)
D 181 C,D	Hfo	TTL-Logic	=... 7481 (TTL)	14-DIC,DIP			... 7481... (TTL)
D 191 C,D	Hfo	TTL-Logic	=... 7491 (TTL)	14-DIC,DIP			... 7491... (TTL)
D 192 C,D	Hfo	TTL-Logic	=... 74192 (TTL)	16-DIC,DIP			... 74192... (TTL)
D 193 C,D	Hfo	TTL-Logic	=... 74193 (TTL)	16-DIC,DIP			... 74193... (TTL)
D 195 C,D	Hfo	TTL-Logic	=... 7495 (TTL)	14-DIC,DIP			... 7495... (TTL)
D 200 C,D	Hfo	TTL-Logic	=... 74H00 (TTL)	14-DIC,DIP			... 74H00... (TTL)
D 201 C,D	Hfo	TTL-Logic	=... 74H01 (TTL)	14-DIC,DIP			... 74H01... (TTL)
D 204 C,D	Hfo	TTL-Logic	=... 74H04 (TTL)	14-DIC,DIP			... 74H04... (TTL)
D 210 C,D	Hfo	TTL-Logic	=... 74H10 (TTL)	14-DIC,DIP			... 74H10... (TTL)
D 220 C,D	Hfo	TTL-Logic	=... 74H20 (TTL)	14-DIC,DIP			... 74H20... (TTL)
D 228		Si-Di	=BA 159	31a	BA 159	31a	•BA 159
D 230 C,D	Hfo	TTL-Logic	=... 74H30 (TTL)	14-DIC,DIP			... 74H30... (TTL)
D 232		Si-Di	=BA 159	31a	BA 159	31a	•BA 159
D 240 C,D	Hfo	TTL-Logic	=... 74H40 (TTL)	14-DIC,DIP			... 74H40... (TTL)
D 251 C,D	Hfo	TTL-Logic	=... 74H51 (TTL)	14-DIC,DIP			... 74H51... (TTL)
D 254 C,D	Hfo	TTL-Logic	=... 74H54 (TTL)	14-DIC,DIP			... 74H54... (TTL)
D 274 C,D	Hfo	TTL-Logic	=... 74H74 (TTL)	14-DIC,DIP			... 74H74... (TTL)
D 335		Ge-Di	=AA 119	31a	AA 119	31a	•AA 119
D 336		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 345 D	Hfo	TTL-Logic	BCD •7-Segment Decoder, 0...+70°	16-DIP			-
D 346 D	Hfo	TTL-Logic	BCD •7-Segment Decoder, 0...+70°	16-DIP			-
D 347 D	Hfo	TTL-Logic	BCD •7-Segment Decoder, 0...+70°	16-DIP			74LS247 (TTL)
D 348 D	Hfo	TTL-Logic	BCD •7-Segment Decoder, 0...+70°	16-DIP			74LS247 (TTL)
D 351 D	Hfo	TTL-Logic	Teiler/Divider, 0...+75°	14-DIP			-
D 352		Si-Di	=BA 282	31a			•BA 282
D 355 D	Hfo	TTL-Logic	Timer, 12L	18-DIP			-
D 356 D	Hfo	TTL-Logic	Timer, 12L	18-DIP			-
D 377		Si-Di	=FDH 600	31a	1N4148	31a	•FDH 600
D 380		Se-Di	Dual-Rr		(2x AA 133)	31a	M40C4
D 394 D	Hfo	LIN-IC	Schrittmotorsteuerung/Stepper Motor Control	18-DIP			-
D 395 D	Hfo	TTL-Logic	Schrittmotorsteuerung/Stepper Motor Control	18-DIP			-
D 410 D	Hfo	TTL-Logic	3x Treiber/Driver (AND-Gates)	16-DIP			SAA 1029
D 461 D	Hfo	TTL-Logic	Dual-Treiber/Driver f. MOS-Memory	14-DIP			SN 75361
D 473		Si-Di	=BA 127	31a	1N4148	31a	•BA 127
D 474		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 475		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 491 D	Hfo	TTL-Logic	4-Segment-Treiber/Driver	14-DIP			-
D 492 D	Hfo	TTL-Logic	6x Digit-Treiber/Driver	14-DIP			SN 75492
D 716 X	Hfo	LIN-IC	Thermo Printer Control				-
D 718 D	Hfo	LIN-IC	16-Bit Ser/Par. Converter				(UAA 2022)
D 764 A		Si-Di	=BAV 45	31a	(1N4148)	31a	•BAV 45
D 797		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 837(A)		Si-Di	=1N4148	31a	1N4148	31a	•1N4148
D 838		Si-Di	=BA 159	31a	BA 159	31a	•BA 159
D 1201 A	Rca	Si-Di	=1N4002	31a	DO-15	1N4007	•1N4002
D 1201 B	Rca	Si-Di	=1N4003	31a	DO-15	1N4007	•1N4003
D 1201 D	Rca	Si-Di	=1N4004	31a	DO-15	1N4007	•1N4004
D 1201 F	Rca	Si-Di	=1N4001	31a	DO-15	1N4007	•1N4001
D 1201 M	Rca	Si-Di	=1N4005	31a	DO-15	1N4007	•1N4005
D 1201 N	Rca	Si-Di	=1N4006	31a	DO-15	1N4007	•1N4006
D 1201 P	Rca	Si-Di	=1N4007	31a	DO-15	1N4007	•1N4007
D 1300 A...D	Rca	Si-Di	Uni, 150...525V, 0.25A, Uf<1(0.25A), 30µs A=100/150V, B=200/300V, D=400/525V	2c	TO-1	BA 159	BA 157...159, BA 199/..., BY 204/..., ++
D 2101(S)	Rca	Si-Di	TV Clamp Diode, 600V, 1A~, Uf<1.5V(4A), <700ns	34b	DO-1	BYD 33 M	BYX 55/600, MR 816...818, RGP 10J...M, ++

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
D 2103 S.SF	Rca	Si-Di	TV Damper Diode, 750V, 3A _r , Uf<1.4V(4A), <500ns S: Rücklauf/Retrace, SF: Hinlauf/Trace	34b	DO-1	BYW 96 E BY 329/1200 ⁴	31a 17k BY 399, RGP 30K...M, (BY 229/800...1000) ⁶
D 2201 A...N	Rca	Si-Di	FRr, 50...800V, 1A, Uf<1.9V(4A), <500ns A=100, B=200, D=400, F=50, M=600, N=800V	31a	DO-15	BYD 33 M	31a BY 218/..., BY 258/..., RGP 15A...M, ++
D-2240 A		Hybrid-IC	LF Out, +25V, >20W(±22V/8Ω)				-
D 2406 A...M	Rca	Si-Di	P FRr, 100...600V, 6A(Tc=100°), Uf<1.4V(6A), <350ns A=100, B=200, C=300, D=400, F=50, M=600	32a	DO-4		BYX 50/...
D 2406 A-R...M-R		Si-Di	=D 2406A...M:	32b	DO-4		BYX 50/...R
D 2412 A...M	Rca	Si-Di	P FRr, 100...600V, 12ATc=100°, Uf<1.4(12A), <350ns	32a	DO-4		BYT 61/..., BYX 62/..., BYV 24/..., ++
D 2412 A-R...M-R		Si-Di	=D 2412A...M:	32b	DO-4		BYT 61/...R, BYX 62/...R, BYV 24/...R, ++
D 2520 A...M	Rca	Si-Di	P FRr, 100...600V, 20A(Tc=100°), Uf<1.4V(20A), <350ns	32a	DO-5		BYT 65/..., BYX 63/..., BYX 64/..., ++
D 2520 A-R...M-R		Si-Di	=D 2520A...M:	32b	DO-5		BYT 65/...R, BYX 63/...R, BYX 64/...R, ++
D 2540 A...M	Rca	Si-Di	P FRr, 100...600, 40A(Tc=100°), Uf<1.8V(100A), <350ns	32a	DO-5		BYW 25/..., MR 861...866, MR 871...876
D 2540 A-R...M-R		Si-Di	=D 2540A...M:	32b	DO-5		BYW 25/...R, MR 861R...866R, MR 871R...876R
D 2600 EFM	Rca	Si-Di	TV Clamp Di, 550...600V, 0.5A, Uf<2V(4A), <700ns EF=550V, M=600V	31a		BYD 33 M	31a BY 407, BY 208/600, BY 201/6, RGP 10J, ++
D 2601 A...N	Rca	Si-Di	TV Damper Di, 100...800V, 1/6A, Uf<1.9V(4A), <500ns A=100, B=200, D=400, DF=450, E=500, EF=550V, M=600, N=800V	31a	DO-26	BYD 33 M	31a BY 258/..., BYV 12...16, RGP 15B...M, ++
D-2950 A		Hybrid-IC	LF Out, 50V, >20W(44V/8Ω)				-
D 3202 U	Rca	Diac	Ub=25...40V, 0.19A, Itsm=2A, Ib<25μA	311	DO-15		1N5760, N 413L
D 3202 Y		Diac	=D 3202 U: Ub=29...35V	311			1N5761, N 413M, BR 100, DO 201YR
D 3702	Pls	LIN-IC	Telecom, 5x Relay Driver, 65V Output, Ucc=5V, 50mA	-DIC			-
D 4042	Pls	NMOS-IC	Telecom, Dual 1008-Bit Shift Register, 5V, 28mA	14-DIC			-
D 4803 DC	Hfo	LIN-IC	8-Bit Treiber/Driver	16-DIP			-
D-4902		Hybrid-Z-IC	Z-IC, +5V, 1.5A				-
D-4903		Hybrid-Z-IC	Z-IC, +12V, 1.8A				-
D-4904		Hybrid-Z-IC	Z-IC, +24V, 1.5A				-
D 6221 VC	Hfo	LIN-IC	4x Darl.-Schalter/Switch, 50V, 1.8A	15-SQL			L 6221N
DA...DM							
DA		Si-N	=2SD1418-DA (SMD-Marking)	39	SOT-89		-2SD1418
DA		Si-N	=2SD1618 (SMD-Marking)	39	SOT-89		-2SD1618
DA		Si-N	=2SD1664 (SMD-Marking)	39	SOT-89		-2SD1664
DA(s)		Si-P	=BCW 67A (SMD-Marking)	35	SOT-23		-BCW 67A
DA		Si-N	=BF 622 (SMD-Marking)	39	SOT-89		-BF 622
DA		Si-N	=BF 722 (SMD-Marking)	~39	SOT-223		-BF 722
DA		MOS-N-FET-e	=μPA502T (SMD-Marking)	45	SOT-153		-μPA502T
DA 2		Si-Di	=SD BAX 12 (SMD-Marking)	35	SOT-23		-SD BAX 12
DA 3	Tho	Diac	Ub=28...36V, Ib<0.3mA, Itsm=1A	311	DO-7		A 9903, D 32
DA 4	Tho	Diac	Ub=35...45V, Ib<0.15mA, Itsm=2A	311	DO-7		1N5762, N 413N, D 3202U
DA 5		Si-Di	=BAR 43S (SMD-Marking)	35	SOT-23		-BAR 43S
DA 6		Z-Di	=BZV 53A (SMD-Marking)	35	SOT-23		-BZV 53A
DA 7		Z-Di	=BZV 53B (SMD-Marking)	35	SOT-23		-BZV 53B
DA 8		Z-Di	=BZV 54A (SMD-Marking)	35	SOT-23		-BZV 54A
DA 9		Z-Di	=BZV 54B (SMD-Marking)	35	SOT-23		-BZV 54B
DA 0601	Hit	LIN-IC	6x Si-Dioden Array, gemeinsame/common Cathode	7-SIP			-
DA 0602	Hit	LIN-IC	6x Si-Dioden Array, gemeinsame/common Anode	7-SIP			-
DAC-08...FN,DC,PC		Fch,Mot,Phi	D/A-IC	8 Bit, multiplying, hi-speed	16-DIC,DIP		NE 5007...5008, SE 5008, DAC 0800...0802
DAC 0800 ...	Nsc	CMOS-A/D-IC	8 Bit, Settling 100ns, ±18V	16-DIC,DIP			-
DAC 0801 ...	Nsc	CMOS-A/D-IC	8 Bit, Settling 100ns, ±18V	16-DIC,DIP			-
DAC 0802 ...	Nsc	CMOS-A/D-IC	8 Bit, Settling 100ns, ±18V	16-DIC,DIP			-
DAC 0806 D	Tho	D/A-IC	=DAC 0806LCN: SMD	16-MDIP			-
DAC 0806 LCJ	Nsc,Tho	D/A-IC	=DAC 0806LCN: Fig. -	16-DIC			MC 1408L6
DAC 0806 LCN	Nsc,Tho	D/A-IC	8 Bit, multiplying, hi-speed(150ns Sett.),0...+75°	16-DIP			MC 1408P6
DAC 0807 D	Tho	D/A-IC	=DAC 0807LCN: SMD	16-MDIP			-
DAC 0807 LCJ	Nsc,Tho	D/A-IC	=DAC 0807LCN: Fig. -	16-DIC			MC 1408L7
DAC 0807 LCN	Nsc,Tho	D/A-IC	8 Bit, multiplying, hi-speed(150ns Sett.),0...+75°	16-DIP			MC 1408P7
DAC 0808 D	Tho	D/A-IC	=DAC 0808LCN: SMD	16-MDIP			-
DAC 0808 LCJ	Nsc,Tho	D/A-IC	=DAC 0808LCN: Fig. -	16-DIC			MC 1408L8
DAC 0808 LCN	Nsc,Tho	D/A-IC	8 Bit, multiplying, hi-speed(150ns Sett.),0...+75°	16-DIP			MC 1408P8
DAC 0808 LJ,LD	Nsc,Tho	D/A-IC	=DAC 0808LCN: -55...+125°	16-DIC			MC 1508L8
DAC 0830 LCD	Nsc	CMOS-D/A-IC	8 Bit, 0.05% Linearity, 1μs Settling, -40...+85°	20-DIC			-
DAC 0831 LCD	Nsc	CMOS-D/A-IC	8 Bit, 0.1% Linearity, 1μs Settling, -40...+85°	20-DIC			-
DAC 0832 LCD	Nsc	CMOS-D/A-IC	8 Bit, 0.2% Linearity, 1μs Settling, -40...+85°	20-DIC			-
DAC 0830...832 LCN	Nsc	CMOS-D/A-IC	=DAC 0830LCD...0832LCD: 0...+70°	20-DIP			-
DAC 0830...832 LD	Nsc	CMOS-D/A-IC	=DAC 0830LCD...0832LCD: -55...+125°	20-DIC			-
DAC 1000 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.05% Linearity, 500ns Settling, -40...+85°	24-DIC			-
DAC 1001 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.1% Linearity, 500ns Settling, -40...+85°	24-DIC			-
DAC 1002 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.2% Linearity, 500ns Settling, -40...+85°	24-DIC			-
DAC 1000...1002 LCN	Nsc	CMOS-D/A-IC	=DAC 1000LCD...1002LCD: 0...+70°	24-DIP			-
DAC 1000...1002 LD	Nsc	CMOS-D/A-IC	=DAC 1000LCD...1002LCD: -55...+125°	24-DIC			-
DAC 1006 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.05% Linearity, 500ns Settling, -40...+85°	20-DIC			-
DAC 1007 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.1% Linearity, 500ns Settling, -40...+85°	20-DIC			-
DAC 1008 LCD	Nsc	CMOS-D/A-IC	10 Bit, 0.2% Linearity, 500ns Settling, -40...+85°	20-DIC			-
DAC 1006...1008 LCN	Nsc	CMOS-D/A-IC	=DAC 1006LCD...1008LCD: 0...+70°	20-DIP			-
DAC 1006...1008 LD	Nsc	CMOS-D/A-IC	=DAC 1006LCD...1008LCD: -55...+125°	20-DIC			-
DAC 1020 LCD	Nsc	D/A-IC	10 Bit, 0.05% Linearity, 500ns Settling, -40...+85°	16-DIC			-
DAC 1021 LCD	Nsc	D/A-IC	10 Bit, 0.1% Linearity, 500ns Settling, -40...+85°	16-DIC			-
DAC 1022 LCD	Nsc	D/A-IC	10 Bit, 0.2% Linearity, 500ns Settling, -40...+85°	16-DIC			-
DAC 1020...1022 LCN	Nsc	D/A-IC	=DAC 1020LCD...1022LCD: 0...+70°	16-DIP			-
DAC 1020...1022 LD	Nsc	D/A-IC	=DAC 1020LCD...1022LCD: -55...+125°	16-DIC			-
DAC 1200 HCD	Nsc	D/A-IC	12 Bit, 0.012% Linearity, 15V/μs, -40...+85	24-DIC			-
DAC 1201 HCD	Nsc	D/A-IC	12 Bit, 0.049% Linearity, 15V/μs, -40...+85	24-DIC			-
DAC 1200...1201 HD	Nsc	D/A-IC	=DAC 1200HCD...1201HCD: -55...+125°	24-DIC			-
DAC 1208 LCD	Nsc	D/A-IC	12 Bit, 0.012% Linearity, 1μs Settling, -40...+85°	24-DIC			-
DAC 1209 LCD	Nsc	D/A-IC	12 Bit, 0.024% Linearity, 1μs Settling, -40...+85°	24-DIC			-
DAC 1210 LCD	Nsc	D/A-IC	12 Bit, 0.05% Linearity, 1μs Settling, -40...+85°	24-DIC			-
DAC 1218 LCD	Nsc	D/A-IC	12 Bit, 0.012% Linearity, 1μs Settling, -40...+85°	18-DIC			-
DAC 1219 LCD	Nsc	D/A-IC	12 Bit, 0.024% Linearity, 1μs Settling, -40...+85°	18-DIC			-
DAC 1218...1219 LD	Nsc	D/A-IC	=DAC 1218LCD...1219LCD: -55...+125°	18-DIC			-
DAC 1220 LCD	Nsc	D/A-IC	12 Bit, 0.05% Linearity, 500ns Settling, -40...+85°	18-DIC			-
DAC 1221 LCD	Nsc	D/A-IC	12 Bit, 0.1% Linearity, 500ns Settling, -40...+85°	18-DIC			-

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
DAC 1222 LCD	Nsc	D/A-IC	12 Bit, 0,2% Linearity, 500ns Settling, -40...+85°	18-DIC			-
DAC 1220...1222 LCN	Nsc	D/A-IC	=DAC 1220LCD...1222LCD: 0...+70°	18-DIP			-
DAC 1220...1222 LD	Nsc	D/A-IC	=DAC 1220LCD...1222LCD: -55...+125°	18-DIC			-
DAC 1230 LCD	Nsc	D/A-IC	12 Bit, 0,012% Linearity, 1µs Settling, -40...+85°	20-DIC			-
DAC 1231 LCD	Nsc	D/A-IC	12 Bit, 0,024% Linearity, 1µs Settling, -40...+85°	20-DIC			-
DAC 1232 LCD	Nsc	D/A-IC	12 Bit, 0,05% Linearity, 1µs Settling, -40...+85°	20-DIC			-
DAC 1280 ACD	Nsc	D/A-IC	12 Bit, 0,012% Linearity, 0...+70°	24-DIC			-
DAC 1280 CD	Nsc	D/A-IC	12 Bit, 0,024% Linearity, 0...+70°	24-DIC			-
DAC 1280...I	Nsc	D/A-IC	=DAC 1280(A): -25...+85°	24-DIC			-
DAC 1285 ACD,HCD	Nsc	D/A-IC	12 Bit, 0,012% Linearity, -25...+85°	24-DIC			-
DAC 1285 AD	Nsc	D/A-IC	=DAC 1285ADC,HDC: -55...+125°	24-DIC			-
DAC1408(A...C)DC,PC	Fch	D/A-IC	8 Bit, multiplying, hi-speed(85ns Sett.), 0...+70° A<±0,19%, B<±0,39%, C<±0,78% Accuracy =DAC 1408...: ±0,19% Accuracy, -55...+125°	16-DIC,DIP			AM 1408... MC 1408...
DAC 1508 DM	Fch	D/A-IC	=DAC 1408...: ±0,19% Accuracy, -55...+125°	16-DIC			AM 1508... MC 1508...
DAN 801	Rhm	Si-Di	=DAN 401: 8 Di, Common Cathode	9-SIP			-
DAN 803	Rhm	Si-Di	=DAN 401: 8 Di, Common Cathode	9-SIP			-
DAP 801	Rhm	Si-Di	=DAN 401: 8 Di, Common Anode	9-SIP			-
DAP 803	Rhm	Si-Di	=DAN 401: 8 Di, Common Anode	9-SIP			-
DB		Si-N	=2SD1418-DB (SMD-Marking)	39	SOT-89		-2SD1418
DB		Si-N	=2SD1619 (SMD-Marking)	39	SOT-89		-2SD1619
DB		Si-N	=2SD1766 (SMD-Marking)	39	SOT-89		-2SD1766
DB(s)		Si-P	=BCW 67B (SMD-Marking)	35	SOT-23		-BCW 67B
DB		Si-P	=BF 623 (SMD-Marking)	39	SOT-89		-BF 623
DB		Si-P	=BF 723 (SMD-Marking)	-39°	SOT-223		-BF 723
DB		MOS-N-FET-e	=µPA572T (SMD-Marking)	45(2mm)	SOT-353		-µPA572T
DB 1		Si-Di	=BAR 43A (SMD-Marking)	35	SOT-23		-BAR 43A
DB 1 A...P	Gen,Rca	Si-Br	Br Rr, 50...1000V, 1A, Uf<1,1V(1A) A=50, B=200, D=400, F=50, M=600, N=800, P=1000V	4-DIP	(+---)		A 0503...0580, DF 01...10
DB 2		Si-Di	=BAR 43B (SMD-Marking)	35	SOT-23		-BAR 43B
DB 3	Tho	Diac	Ub=28...36V, Ib<0,3mA	311	DO-7,DO-41		-
DB 3+35		Diac	Ub=28...36V, Ib<0,05mA	311	DO-7		-
DB 4	Tho	Diac	=DB 3: Ub=35...45V	311	DO-7		-
DB 6	Tho	Diac	=DB 3: Ub=56...70V	311	DO-7		-
DB 6		Si-Di	=BAY 85S (SMD-Marking)	35	SOT-23		-BAY 85S
DBC 146-4(A...C)		Si-N	=BC 146:	36b			-BC 146
DBC 201		Si-P	=BC 201:	36b			-BC 201
DBC 202		Si-P	=BC 202:	36b			-BC 202
DBC 203		Si-P	=BC 203:	36b			-BC 203
DBP		Si-N	=2SD1766-P (SMD-Marking)	39	SOT-89		-2SD1766
DBQ		Si-N	=2SD1766-Q (SMD-Marking)	39	SOT-89		-2SD1766
DBR		Si-N	=2SD1766-R (SMD-Marking)	39	SOT-89		-2SD1766
DC		Ge-P	=AF 137		AF 239 S	5g	-AF 137
DC		Si-N	=2SC3444-C (SMD-Marking)	39	SOT-89		-2SC3444
DC		Si-N	=2SD1418-DC (SMD-Marking)	39	SOT-89		-2SD1418
DC		Si-N	=2SD1620 (SMD-Marking)	39	SOT-89		-2SD1620
DC		Si-N	=2SD1767 (SMD-Marking)	39	SOT-89		-2SD1767
DC(s)		Si-P	=BCW 67C (SMD-Marking)	35	SOT-23		-BCW 67C
DC		Si-N	=BF 620 (SMD-Marking)	39	SOT-89		-BF 620
DC		Si-N	=BF 720 (SMD-Marking)	-39°	SOT-223		-BF 720
DC		Si-N	=BFN 20 (SMD-Marking)	39	SOT-89		-BFN 20
DC 018	Digital E.	I/O-IC	Ser.-Par./Par.-Ser. Converter	40-DIP			DS 8609DC
DC 021	Digital E.	DIG-IC	8-Bit Bustreiber/Bus Driver, bidirectional	20-DIP			DS 8638DC
DC 34	Tho	Diac	Ub=30...38V, Ib<50µA	311	DO-35		-
DC 38	Tho	Diac	Ub=34...42V, Ib<50µA	311	DO-35		-
DC 42	Tho	Diac	Ub=39...45V, Ib<50µA	311	DO-35		-
DCP		Si-N	=2SD1767-P (SMD-Marking)	39	SOT-89		-2SD1767
DCQ		Si-N	=2SD1767-Q (SMD-Marking)	39	SOT-89		-2SD1767
DCR		Si-N	=2SD1767-R (SMD-Marking)	39	SOT-89		-2SD1767
DD		Si-N	=2SC2463-D (SMD-Marking)	35	SOT-23		-2SC2463
DD		Si-N	=2SC3441-D (SMD-Marking)	35	SOT-23		-2SC3441
DD		Si-N	=2SC3444-D (SMD-Marking)	39	SOT-89		-2SC3444
DD		Si-N	=2SD1419-DD (SMD-Marking)	39	SOT-89		-2SD1419
DD		Si-N	=2SD1621 (SMD-Marking)	39	SOT-89		-2SD1621
DD		Si-N	=BFN 16 (SMD-Marking)	39	SOT-89		-BFN 16
DD		Z-Di	=SM 6T 6V8 (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T....
DD 7661		LIN-IC	TV Tuning Processor	40-DIP			-
DD 7662		LIN-IC	TV-Tuning Processor	16-DIP			-
DE		Si-P	=2SA1037KLN-E (Typ-Code/Stempel/mark.)	35	SOT-23		-2SA1037KLN
DE		Si-N	=2SC2463-E (SMD-Marking)	35	SOT-23		-2SC2463
DE		Si-N	=2SC3441-E (SMD-Marking)	35	SOT-23		-2SC3441
DE		Si-N	=2SC3444-E (SMD-Marking)	39	SOT-89		-2SC3444
DE		Si-N	=2SD1419-DE (SMD-Marking)	39	SOT-89		-2SD1419
DE		Si-N	=2SD1622 (SMD-Marking)	39	SOT-89		-2SD1622
DE		Si-N-Darl	=2SD1834 (SMD-Marking)	39	SOT-89		-2SD1834
DE		Si-N	=BFN 18 (SMD-Marking)	39	SOT-89		-BFN 18
DE		Z-Di	=SM 6T 6V8A (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T....
DF		Si-N	=2SC2463-F (SMD-Marking)	35	SOT-23		-2SC2463
DF		Si-N	=2SC3441-F (SMD-Marking)	35	SOT-23		-2SC3441
DF		Si-N	=2SD1623 (SMD-Marking)	39	SOT-89		-2SD1623
DF(s)		Si-P	=BCW 68F (SMD-Marking)	35	SOT-23		-BCW 68F
DF		Si-P	=BF 621 (SMD-Marking)	39	SOT-89		-BF 621
DF		Si-P	=BF 721 (SMD-Marking)	-39°	SOT-223		-BF 721
DF		Si-P	=BFN 21 (SMD-Marking)	39	SOT-89		-BFN 21
DF		Z-Di	=SM 6T 7V5 (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T....
DF 01		C-Di	AFC	31a			-
DF 01(M.S)	Gie	Si-Br	Br Rr, 100V, 1A, Uf<1,1V(1A)	4-DIP			A 0526, DB 1B
DF 02(M.S)	Gie	Si-Br	=DF 01(M), 200V	4-DIP			A 0553, DB 1B
DF 04(M.S)	Gie	Si-Br	=DF 01(M): 400V	4-DIP			A 0580, DB 1D
DF 005(M.S)	Gie	Si-Br	=DF 01(M): 50V	4-DIP			A 0506, DB 1A
DF 06(M.S)	Gie	Si-Br	=DF 01(M): 600V	4-DIP			DB 1M
DF 08(M.S)	Gie	Si-Br	=DF 01(M): 800V	4-DIP			DB 1N
DF 10(M.S)	Gie	Si-Br	=DF 01(M): 1000V	4-DIP			DB 1P

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
DF 320(DJ,DP)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				MV 4320	
DF 321	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 322(DJ,DP)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 323(DJ,DP)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 820(DJ,DK)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 821(DJ,DK)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 822(DJ,DK)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 823(DJ,DK)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DF 824(DJ,DK)	Itt	CMOS-IC	Telecom, Tastwahl/Digital Dialing				-	
DFA 007		Ge-Di	=AA 143	31a	AA 138	31a	=AA 143	
DG		Si-N	=2SC2713-GR (SMD-Marking)	35	SOT-23		=2SC2713	
DG		Si-N	=2SC4117-GR (SMD-Marking)	35(2mm)	SOT-323		=2SC4117	
DG		Si-N	=2SD1624 (SMD-Marking)	39	SOT-89		=2SD1624	
DG(s)		Si-P	=BCW 68G (SMD-Marking)	35	SOT-23		=BCW 68G	
DG		Si-P	=BFN 17 (SMD-Marking)	39	SOT-89		=BFN 17	
DG		Z-Di	=SM 6T 7V5A (SMD-Marking)	71a(6x4mm)	SOD-6		=SM 6T....	
DG 1	Gie	Si-Di	=CG 1	31a	SOD-57	BY 228	=CG 1	
DG 2	Gie	Si-Di	=CG 2	31a	SOD-57	BY 228	=CG 2	
DG 3	Gie	Si-Di	=CG 3	31a	SOD-57	BY 228	=CG 3	
DG 13	Say	Ge-Di	TV Damper-Di, 120V, 3/10A, Uf<1V(10A)	23p	TO-3		AY 102, AY 106	
DG 14	Say	Ge-Di	=DG 13: 250V	23p	TO-3		AY 102	
DG 130	Say	Ge-Di	TV Damper-Di, 120V, 3/10A, Uf<1V(10A)	23(AAK)	TO-3		AY 102, AY 106	
DG 140	Say	Ge-Di	=DG 130: 250V	23(AAK)	TO-3		AY 102	
DG 182...	Six	Bi-MOS-IC	=TL 182...	14-DIC,DIP			=TL 182...	
DG 185...	Six	Bi-MOS-IC	=TL 185...	16-DIC,DIP			=TL 185...	
DG 188...	Six	Bi-MOS-IC	=TL 188...	14-DIC,DIP			=TL 188...	
DG 191...	Six	Bi-MOS-IC	=TL 191...	16-DIC,DIP			=TL 191...	
DGO		Si-N	=2SD1963-Q (SMD-Marking)	39	SOT-89		=2SD1963	
DGR		Si-N	=2SD1963-R (SMD-Marking)	39	SOT-89		=2SD1963	
DGS		Si-N	=2SD1963-S (SMD-Marking)	39	SOT-89		=2SD1963	
DH		Si-P	=2SB1025-DH (SMD-Marking)	39	SOT-89		=2SB1025	
DH		Si-N	=2SD1625 (SMD-Marking)	39	SOT-89		=2SD1625	
DH(s)		Si-P	=BCW 68H (SMD-Marking)	35	SOT-23		=BCW 68H	
DH		Si-P	=BFN 19 (SMD-Marking)	39	SOT-89		=BFN 19	
DI		Si-N	=2SC3867 (SMD-Marking)	35	SOT-23		=2SC3867	
DI		Si-N	=2SD1626 (SMD-Marking)	39	SOT-89		=2SD1626	
DJ		Si-P	=2SB1025-DJ (SMD-Marking)	39	SOT-89		=2SB1025	
DJ		Si-N	=2SD1627 (SMD-Marking)	39	SOT-89		=2SD1627	
DJ 4		N-FET	=3SK180-4 (SMD-Marking)	44	SOT-143		=3SK180	
DJ 5		N-FET	=3SK180-5 (SMD-Marking)	44	SOT-143		=3SK180	
DJ 6		N-FET	=3SK180-6 (SMD-Marking)	44	SOT-143		=3SK180	
DJQ		Si-N	=2SD2098-Q (SMD-Marking)	39	SOT-89		=2SD2098	
DJR		Si-N	=2SD2098-R (SMD-Marking)	39	SOT-89		=2SD2098	
DJS		Si-N	=2SD2098-S (SMD-Marking)	39	SOT-89		=2SD2098	
DK		Si-P	=2SB1025-DK (SMD-Marking)	39	SOT-89		=2SB1025	
DK		Si-P	=2SB798-DK (SMD-Marking)	39	SOT-89		=2SB798	
DK		Si-N	=2SD1628 (SMD-Marking)	39	SOT-89		=2SD1628	
DK(s)		Si-P	=BCX 42 (SMD-Marking)	35	SOT-23		=BCX 42	
DKP		Si-N	=2SC4672-P (SMD-Marking)	39	SOT-89		=2SC4672	
DKQ		Si-N	=2SC4672-Q (SMD-Marking)	39	SOT-89		=2SC4672	
DKS 21	Sam	Si-N-Darl	LF, 30/25V, 0,5A, 0,6W, 200MHz, hFE=2k...15k	{DKS23 7e	TO-92	BC 879	7c	BC 517, BC 617, BC 875, MPS-A25...29, ++
DKS 22	Sam	Si-N-Darl	=DKS 21: hFE=10k...40k	{DKS24 7e	TO-92	(BC 879) ¹³	7c	BC 517, BC 617, MPS-A25...29, ++
DKS 23	Sam	Si-P-Darl	LF, 30/25V, 0,5A, 0,6W, 175MHz, hFE=2k...15k	{DKS21 7e	TO-92	BC 880	7c	BC 516, BC 876, MPS-A63...64, MPS-A75...77
DKS 24	Sam	Si-P-Darl	=DKS 23: hFE=10k...40k	{DKS22 7e	TO-92	(BC 880) ¹³	7c	BC 516, MPS-A63...64, MPS-A75...77
DL		Si-P	=2SA1343 (SMD-Marking)	35	SOT-23		=2SA1343	
DL		Si-P	=2SB1026-DL (SMD-Marking)	39	SOT-89		=2SB1025	
DL		Si-P	=2SB798-DL (SMD-Marking)	39	SOT-89		=2SB798	
DL		Si-N	=2SC2713-BL (SMD-Marking)	35	SOT-23		=2SC2713	
DL		Si-N	=2SC4117-BL (SMD-Marking)	35(2mm)	SOT-323		=2SC4117	
DL		Si-N	=2SD2099 (SMD-Marking)	39	SOT-89		=2SD2099	
DL 000 D,DG	Hfo	TTL-Logic	=... 74LS00		14-DIP		... 74LS00... (TTL)	
DL 000 SC	Hfo	TTL-Logic	=DL 000D,DG: SMD		14-MDIP			
DL 002 D,DG	Hfo	TTL-Logic	=... 74LS02		14-DIP		... 74LS02... (TTL)	
DL 002 SC	Hfo	TTL-Logic	=DL 002D,DG: SMD		14-MDIP			
DL 003 D,DG	Hfo	TTL-Logic	=... 74LS03		14-DIP		... 74LS03... (TTL)	
DL 003 S,SC	Hfo	TTL-Logic	=DL 003D: SMD		14-MDIP			
DL 004 D,DG	Hfo	TTL-Logic	=... 74LS04		14-DIP		... 74LS04... (TTL)	
DL 005 DC	Hfo	TTL-Logic	=... 74LS05		14-DIP		... 74LS05... (TTL)	
DL 008 D,DG	Hfo	TTL-Logic	=... 74LS08		14-DIP		... 74LS08... (TTL)	
DL 008 SC	Hfo	TTL-Logic	=DL 008D,DG: SMD		14-MDIP			
DL 010 D,DG	Hfo	TTL-Logic	=... 74LS10		14-DIP		... 74LS10... (TTL)	
DL 010 SC	Hfo	TTL-Logic	=DL 010D,DG: SMD		14-MDIP			
DL 011 D	Hfo	TTL-Logic	=... 74LS11		14-DIP		... 74LS11... (TTL)	
DL 011 SC	Hfo	TTL-Logic	=DL 011D,DG: SMD		14-MDIP			
DL 014 D	Hfo	TTL-Logic	=... 74LS14		14-DIP		... 74LS14... (TTL)	
DL 016 DC	Hfo	TTL-Logic	=... 74LS16		14-DIP		... 74LS16... (TTL)	
DL 020 D,DG	Hfo	TTL-Logic	=... 74LS20		14-DIP		... 74LS20... (TTL)	
DL 020 SC	Hfo	TTL-Logic	=DL 020D,DG: SMD		14-MDIP			
DL 021 D	Hfo	TTL-Logic	=... 74LS21		14-DIP		... 74LS21... (TTL)	
DL 021 SC	Hfo	TTL-Logic	=DL 021D,DG: SMD		14-MDIP			
DL 026 DC	Hfo	TTL-Logic	=... 74LS26		14-DIP		... 74LS26... (TTL)	
DL 030 D,DG	Hfo	TTL-Logic	=... 74LS30		14-DIP		... 74LS30... (TTL)	
DL 030 SC	Hfo	TTL-Logic	=DL 030D,DG: SMD		14-MDIP			
DL 032 D	Hfo	TTL-Logic	=... 74LS32		14-DIP		... 74LS32... (TTL)	
DL 032 SC	Hfo	TTL-Logic	=DL 032D,DG: SMD		14-MDIP			
DL 037 D	Hfo	TTL-Logic	=... 74LS37		14-DIP		... 74LS37... (TTL)	
DL 038 D	Hfo	TTL-Logic	=... 74LS38		14-DIP		... 74LS38... (TTL)	
DL 040 D	Hfo	TTL-Logic	=... 74LS40		14-DIP		... 74LS40... (TTL)	
DL 051 D	Hfo	TTL-Logic	=... 74LS51		14-DIP		... 74LS51... (TTL)	
DL 074 D	Hfo	TTL-Logic	=... 74LS74		14-DIP		... 74LS74... (TTL)	
DL 083 D	Hfo	TTL-Logic	=... 74LS83		16-DIP		... 74LS83... (TTL)	
DL 086 D	Hfo	TTL-Logic	=... 74LS86		14-DIP		... 74LS86... (TTL)	
DL 090 D	Hfo	TTL-Logic	=... 74LS90		14-DIP		... 74LS90... (TTL)	

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
DL 093 D	Hfo	TTL-Logic	=... 74LS93				... 74LS93... (TTL)
DL 112 D	Hfo	TTL-Logic	=... 74LS112				... 74LS112... (TTL)
DL 123 D	Hfo	TTL-Logic	=... 74LS123				... 74LS123... (TTL)
DL 132 D	Hfo	TTL-Logic	=... 74LS132				... 74LS132... (TTL)
DL 155 D	Hfo	TTL-Logic	=... 74LS155				... 74LS155... (TTL)
DL 164 D	Hfo	TTL-Logic	=... 74LS164				... 74LS164... (TTL)
DL 175 D	Hfo	TTL-Logic	=... 74LS175				... 74LS175... (TTL)
DL 192 D	Hfo	TTL-Logic	=... 74LS192				... 74LS192... (TTL)
DL 193 D	Hfo	TTL-Logic	=... 74LS193				... 74LS193... (TTL)
DL 194 D	Hfo	TTL-Logic	=... 74LS194				... 74LS194... (TTL)
DL 251 D	Hfo	TTL-Logic	=... 74LS251				... 74LS251... (TTL)
DL 253 D	Hfo	TTL-Logic	=... 74LS253				... 74LS253... (TTL)
DL 257 D	Hfo	TTL-Logic	=... 74LS257				... 74LS257... (TTL)
DL 259 D	Hfo	TTL-Logic	=... 74LS259				... 74LS259... (TTL)
DL 295 D	Hfo	TTL-Logic	=... 74LS295				... 74LS295... (TTL)
DL 299 D	Hfo	TTL-Logic	=... 74LS299				... 74LS299... (TTL)
DL 374 D	Hfo	TTL-Logic	=... 74LS374				... 74LS374... (TTL)
DL 540 D	Hfo	TTL-Logic	=... 74LS540				... 74LS540... (TTL)
DL 541 D	Hfo	TTL-Logic	=... 74LS541				... 74LS541... (TTL)
DL 2631 D	Hfo	I/O-IC	Leitungstreiber/Line Driver, CCITT V.11.				AM 26LS31
DL 2632 D	Hfo	LIN-IC	Leitungsempfänger/Line Receiver f. DL 2631D				AM 26LS32
DL 8121 D	Hfo	LIN-IC	8-Bit Komparator				AmZ 8121
DL 8127 D	Hfo	TTL-IC	System Clock f. 16-Bit µComp.				AmZ 8127
DL 8640 DC	Hfo	TTL-IC	Bus-Empfänger/Bus Receiver				DS 8640N
DL 8641 DC	Hfo	TTL-IC	Bus-Empfänger/Treiber, Bus Receiver/Driver				DS 8641N
DL 60278	Sgs	LIN-IC	=TDA 7270 S				*TDA 7270S
DL 75113 DC	Hfo	TTL-IC	Leitungssender/Line Driver				SN 75113N
DLN		Si-N	=2SD2167-N (SMD-Marking)	39	SOT-89		*2SD2167
DLP		Si-N	=2SD2167-P (SMD-Marking)	39	SOT-89		*2SD2167
DLQ		Si-N	=2SD2167-Q (SMD-Marking)	39	SOT-89		*2SD2167
DM		Si-P	=2SB1026-DM (SMD-Marking)	39	SOT-89		*2SB1025
DM		Si-P	=2SB798-DM (SMD-Marking)	39	SOT-89		*2SB798
DM		Si-N	=2SD1998 (SMD-Marking)	39	SOT-89		*2SD1998
DM		Si-N-Darl	=2SD2170 (SMD-Marking)	39	SOT-89		*2SD2170
DM 133		Si-Di	=2x 1N4007		2x 1N4007	31a	*1N4007
DM 513	Tho	Si-Di	kV-Rr, 1600V, 1/10A, Uf<1.3V(2A)	31a	DO-15	BY 228	BY 228, EM 516, GP 10Y, RGP 15-16...-20
DM 516	Tho	Si-Di	=DM 513: 1800V	31a	SOD-15		RGP 15-18...-20
DM 2502(C)J.N	Nsc	TTL-IC	8-Bit Successive Approximation TTL Register f. A/D				-
DM 2503(C)J.N	Nsc	TTL-IC	8-Bit Successive Approximation TTL Register f. A/D				-
DM 2504(C)J.N	Nsc	TTL-IC	12-Bit Successive Approximation TTL Register f. A/D				-
DMA 2270	itt	MOS-IC	CTV, D2-MAC Decoder				-
DMA 2275	itt	CMOS-IC	CTV, MAC Descrambling Processor				-
DN...DR							
DN		Si-N	=2SD1999 (SMD-Marking)	39	SOT-89		*2SD1999
DN		Z-Di	=SM 6T 10 (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....
DN 74 LSxx...	Mat	TTL-Logic	Standard TTL-Logic 74LS-Serie				... 74LSxx... (TTL)
DN 811	Mat	LIN-IC	12/16-Zähler/Counter				-
DN 819	Mat	LIN-IC	12L Frequenzteiler/Divider				-
DN 834	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 835	Mat	LIN-IC	Hall-Element, linear				-
DN 837	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 838	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 839	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 850	Mat	LIN-IC	Multivibrator, monostab.				-
DN 851	Mat	LIN-IC	4-Bit Zähler/Counter, reversibel				-
DN 852	Mat	LIN-IC	Binary -Octal Decoder				-
DN 6835	Mat	LIN-IC	Hall-Element, linear				-
DN 6836	Mat	LIN-IC	Hall-Element, linear				-
DN 6837	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 6838	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 6839	Mat	LIN-IC	Hall-Element, Schalter/Switch				-
DN 6844 S	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 6845 S	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 6846 S	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 6847(S,SE,TE)	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DN 6848(S,SE,TE)	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DN 6849(S,SE,TE)	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DN 6851	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 6852	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 6853	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=3.6...16V				-
DN 8640 S	Mat	MOS-IC	3-Bit Shift Register Latch Driver				-
DN 8643 S	Mat	MOS-IC	24-Bit Shift Register Latch Driver				-
DN 8646 FBP	Mat	MOS-IC	4x8-Bit Shift Register Latch Driver				-
DN 8648 FBP	Mat	MOS-IC	32-Bit Shift Register Latch Driver				-
DN 8650	Mat	MOS-IC	Darlington Driver Array, 5V, 0,5A				-
DN 8661	Mat	MOS-IC	Darlington Driver Array, 50V, 0,5A				-
DN 8680	Mat	MOS-IC	Darlington Driver Array, 50V, 1,5A				-
DN 8690	Mat	MOS-IC	Darlington Driver Array, 60V, 1,5A				-
DN 8695	Mat	MOS-IC	Darlington Driver Array, 50V, 1,5A				-
DN 8897(S,SE,TE)	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DN 8898 SE,TE	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DN 8899(S,SE,TE)	Mat	LIN-IC	Hall-Verstärker/Amplifier, Ucc=4.5...16V				-
DNE		Si-N	=2SD2153-E (SMD-Marking)	39	SOT-89		*2SD2153
DNV		Si-N	=2SD2153-U (SMD-Marking)	39	SOT-89		*2SD2153
DNV		Si-N	=2SD2153-V (SMD-Marking)	39	SOT-89		*2SD2153
DNW		Si-N	=2SD2153-W (SMD-Marking)	39	SOT-89		*2SD2153
DO		Si-P	=2SA1201-0 (SMD-Marking)	39	SOT-89		*2SA1201
DO		Si-P	=2SA1620-0 (SMD-Marking)	35	SOT-23		*2SA1620
DO		Si-N	=2SC5092-0 (SMD-Marking)	44	SOT-143		*2SC5092
DO		Si-N	=2SD1997 (SMD-Marking)	39	SOT-89		*2SD1997
DO		Si-P	=KTA1661-0 (SMD-Marking)	39	SOT-89		*KTA 1661

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
DO 201 YR	Tag	Diac	Ub=26...32V, Ib<50µA, Itsm=2A	311	DO-35		1N5761, N 413M, BR 100, D 3202Y
DP		Si-P	=2SB789-P (SMD-Marking)	39	SOT-89		-2SB789
DP		Si-N	=2SD2100 (SMD-Marking)	39	SOT-89		-2SD2100
DP		Si-N-Darl	=2SD2195 (SMD-Marking)	39	SOT-89		-2SD2195
DP		Si-P	=HQ 1L2N (SMD-Marking)	39	SOT-89		-HQ 1...
DP		Z-Di	=SM 6T 10A (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T...
DPU 2500	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor	40-DIP			-
DPU 2540	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor	40-DIP			-
DPU 2543	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor	40-DIP			-
DPU 2544	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor	40-DIP			-
DPU 2545	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor	40-DIP			-
DPU 2553	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor, normal-scan	40-DIP	DPU 2553	40-DIP	-
DPU 2554	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor, double-scan	40-DIP			-
DPU 2555	Itt	NMOS-IC	CTV, Ablenk-/Deflection Processor, normal-scan	40-DIP			-
DO		Si-P	=2SB1219A-Q (SMD-Marking)	35(2mm)	SOT-323		-2SB1219A
DO		Si-P	=2SB710A-Q (SMD-Marking)	35	SOT-23		-2SB710A
DO		Si-P	=2SB789-Q (SMD-Marking)	39	SOT-89		-2SB789
DO		Si-N-Darl+Di	=2SD2176 (SMD-Marking)	39	SOT-89		-2SD2176
DO		Si-P	=HQ 1A3M (SMD-Marking)	39	SOT-89		-HQ 1...
DOQ		Si-N	=2SD2211-N (SMD-Marking)	39	SOT-89		-2SD2211
DOQ		Si-N	=2SD2211-P (SMD-Marking)	39	SOT-89		-2SD2211
DOQ		Si-N	=2SD2211-Q (SMD-Marking)	39	SOT-89		-2SD2211
DR		Si-P	=2SA1037KLN-R (SMD-Marking)	35	SOT-23		-2SA1037KLN
DR		Si-P	=2SB1219A-R (SMD-Marking)	35(2mm)	SOT-323		-2SB1219A
DR		Si-P	=2SB710A-R (SMD-Marking)	35	SOT-23		-2SB710A
DR		Si-P	=2SB789-R (SMD-Marking)	39	SOT-89		-2SB789
DR		Si-N	=2SC4643 (SMD-Marking)	39	SOT-89		-2SC4643
DR		Si-N	=2SC5092-R (SMD-Marking)	44	SOT-143		-2SC5092
DR		Si-N-Darl	=2SD2212 (SMD-Marking)	39	SOT-89		-2SD2212
DR		Si-P	=HQ 1F3M (SMD-Marking)	39	SOT-89		-HQ 1...
DRA 01 B...E	Say	50Hz-Thy	100...400V, 0,1A(Ta=55°), 0,15A-, Igt/Ih<0,2/=3mA B=100V, C=200V, E=400V	7b	TO-92	BRX 49	7a BRX51...56, BRY55/..., MCR100-..., TAG06...
DRA 2 TB...TG	Say	50Hz-Thy	100...600V, 2A(Tc=45°), Igt/Ih<0,2/=3mA TB=100V, TC=200V, TE=400V, TG=600V	13e	TO-202	(TIC 106 M) ⁴	17e C 106-..., TAG 106-...
DRA 03 TB...TG	Say	50Hz-Thy	100...600V, 0,3A(Ta=30°), 0,45A-, Igt/Ih<0,2/=4mA TB=100V, TC=200V, TE=400V, TG=600V	7b	TO-92	BRX 49	7a BRX51...56, BRY55/..., MCR100-..., TAG06...
DRA 5 B...G	Say	50Hz-Thy	100...600V, 5A(Tc=91°), 7,8A-, Igt/Ih<40/<60mA B=100V, C=200V, E=400V, G=600V	17e	TO-220	TAG 626-600	17e MCR 218-..., TAG 625-..., TIC 116-..., ++
DRA 8 B...G	Say	50Hz-Thy	100...600V, 8A(Tc=83°), 12,6A-, Igt/Ih<40/<60mA B=100V, C=200V, E=400V, G=600V	17e	TO-220		TAG 680-..., TIC 122-..., TIC 126-..., ++
DRB 2 B...E	Say	F-Thy	100...400V, 2A(Tc=35°), Igt/Ih<1,5/=12mA, tq<15µs B=100V, C=200V, E=400V	13e	TO-202		S 3060...
DRC 2 E	Say	50Hz-Thy	400V, 2A(Tc=30°), 3A-, Igt/Ih<50/<120mA	30e	(10x8x5)		-
DRC 3 E	Say	50Hz-Thy	400V, 3A(Tc=65°), 4,7A-, Igt/Ih<50/<120mA	17e	TO-220	TAG 626-600	17e BSIC10..., TAG 620-...
DRD 3 B...G	Say	50Hz-Thy	100...600V, 3A, 4,5A-, Igt/Ih<15/=60mA B=100V, C=200V, E=400V, G=600V	17e	TO-220	TAG 626-600	17e TAG 620-...
DRE 3 B...G	Say	50Hz-Thy	100...600V, 3A(Tc=90°), 4,7A-, Igt/Ih<0,2/=4mA B=100V, C=200V, E=400V, G=600V	13e	TO-202	(TIC 106 M) ⁴	17e C 108-..., TAG 108-...
DRR 114		Si-Di	=BA 159		BA 159	31a	-BA 159
DS...DV							
DS		Si-P	=2SA1037KLN-S (SMD-Marking)	35	SOT-23		-2SA1037KLN
DS		Si-P	=2SA1728 (SMD-Marking)	35	SOT-23		-2SA1728
DS		Si-P	=2SB1219A-S (SMD-Marking)	35(2mm)	SOT-323		-2SB1219A
DS		Si-P	=2SB710A-S (SMD-Marking)	35	SOT-23		-2SB710A
DS		Si-P	=2SB789-S (SMD-Marking)	39	SOT-89		-2SB789
DS		Si-N	=2SD1946 (SMD-Marking)	39	SOT-89		-2SD1946
DS		Si-P	=BCX 42R (SMD-Marking)	35	SOT-23		-BCX 42R
DS		Si-P	=HQ 1F3P (SMD-Marking)	39	SOT-89		-HQ 1...
DS 0,8-04B...16B	Bbc	Si-Di	Rr, 400...1600V, 1A, 4,5A-, Uf<1,2V(3A)		BY 255	31a	BY 133...134, BY 126...127, GP 106...Y, ++
DS 0,9-04A...16A	Bbc	Si-Di	Rr, 400...1600V, 1,2A, 5A-, Uf<1,2V(3A)	12c	(10x9x4)	BY 255, BYD 33M	31a BY 226...228, BY 252...255, BY 350/..., ++
DS 1-04B...16B	Bbc	Si-Di	Rr, 400...1600V, 1,2A, 5A-, Uf<1,2V(6A)		BY 255, BYD 33M	31a	BY 226...228, BY 252...255, BY 350/..., ++
DS 1 H...P	Fjd	Si-Di	Rr, 300...1800V-, 1,1A, Uf<1,1V(2A) H=1800, K=1500, M=1000, N=500, P=300V	34a	(13x9mm0)	BY 228, BYD 33M	31a BY 226...228, BY 251...255, GP 15B...M, ++
DS 1,2-04A...16A	Bbc	Si-Di	Rr, 400...1600V, 1,7A, 7A-, Uf<1,3V(6A)	31a	(16x6mm0)	BY 255	31a BY 228, BY 252...255, BY 448, GP 20G...M++
DS 1,8-04A...16A	Bbc	Si-Di	Rr, 400...1600V, 1,7A, 7A-, Uf<1,3V(6A)	12c	(12x14x5)	BY 255	31a BY 228, BY 252...255, BY 448, GP 20G...M++
DS 2-04A...16A	Bbc	Si-Di	Rr, 400...1600V, 1,8A, 7A-, Uf<1,25V(7A)	34b	DO-13	BY 228	31a BY 228, BY 251...255, BYW 52...56, ++
DS 2 H...P	Fjd	Si-Di	=DS 1H...P: 1,65A, Uf<1,1V(4A)	34a	(13x9mm0)	BY 228	31a BY 228, BY 251...255, BYW 52...56, ++
DS 2 S		Si-Di	=BA 100	31a	1N4148	31a	-BA 100
DS 5 S(R)		Si-Di	Dual, Rr		2x 1N4007	31a	2xBY126...127, 2xBY133...135, 2x1N4002...07
DS 6-04A...16A	Bbc	Si-Di	P Rr, 400...1600V, 10A(Tc=131°), 16A-, Uf<1,6V(30A)	32b			BYX 42/...R, BYX 98/...R, SSI D04... ++
DS 8-04A...16A	Bbc	Si-Di	P Rr, 400...1600V, 11A(Tc=150°), 18A-, Uf<1,4V(36A)	32b			BYW 88/...R, BYX 99/...R, SSI E20... ++
DS 10-01B...05B	Bbc	Si-Di	P Rr, 100...500V, 12A(Tc=150°), 19A-, Uf<1,2V(30A)	32b	DO-4		BYW 88/...R, BYX 99/...R, SSI E20... ++
DS 13 A,B	Say	Si-Di	Rr, A=350/500, B=210/300V, 1,5A, Uf<1,1V(2A)	31a	(6x13mm0)	BY 255	31a BY 226...227, BY 252...255, GP 20G...M, ++
DS 13 C...J	Hit	Si-Di	P Rr, 200...800V, 20A, Uf<1,2V(20A) C=200V, E=400V, G=600V, J=800V	32a	DO-5		1N3765...3768, 1N4525...4530
DS 14 C...J	Hit	Si-Di	=DS 13 C...J:	32b	DO-5		D 24/...C, 1N3765...3768R
DS 14 C88	Nsc	CMOS-IC	=KS 5788		14-DIP		KS 5788
DS 14 C89(A)	Nsc	CMOS-IC	=KS 5789		14-DIP		KS 5789
DS 15 A,B	Say	Si-Di	Rr, A=600, B=800V, 0,3A, Uf<1,2V(0,5A), <1,5µs	31a	DO-27	BA 159	31a BA 158...159, BY 126...127, BY 204/..., ++
DS 15 C,E,G	Say	Si-Di	Rr, C=300, E=500, G=800V, 0,2/0,6A, Uf<1,2V(0,2A)	12		BA 159	31a BA 157...159, BY 126...127, BY 204/..., ++
DS 16(N)A... (N)E	Say	Si-Di	Rr, 50...800V, 0,5A, Uf<1V(0,5A) A=800V, B=600V, C=300V, D=100V, E=50V	31a	DO-27	BY 133	31a BY 133...135, 1N4001...07, ++
DS 17	Say	Si-Di	Dual, 70/100V, 2x0,5A, Uf<1,1V(0,5A)	12e	(10x7x4)	2x 1N4007	31a 2xBY126...127, 2xBY133...135, 2x1N4002...07
DS 18	Say	Si-Di	=DS 17:	12h	(10x7x4)	2x 1N4007	31a 2xBY126...127, 2xBY133...135, 2x1N4002...07
DS 19	Say	Si-Di	=DS 17:	12r	(10x7x4)	2x 1N4007	31a 2xBY126...127, 2xBY133...135, 2x1N4002...07
DS 20		Si-Di	=BA 127		1N4148	31a	-BA 127
DS 23		Si-St	=BZX 75/C2V1		Z-Diode, 2,1V	31a	-BZX 75/C2V1
DS 26 LS 31...32...	Nsc	I/O-IC	=AM 26LS31...32...				-AM 26LS31...32...
DS 38	Say	Si-Di	Uni, 50/70V, 0,15/5A, Uf<1V(0,15A)	31a	(4,5x40)	1N4148	31a BA 188...190, BAY 19...21, 1N4148, ++
DS 113 A...C	Say	Si-Di	TV Damp-Di, 1,5/5A, Uf<1,2V(1,5A), <1µs A=1000V, B=1300V, C=1500V	34b	DO-1	BY 228	31a BY 228, BY 328, BY 448

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
DS 118 A...E	Say	Si-Di	Rr, 200...1000V, 1,5A, Uf<0,93V(1,5A) A=200V, B=400V, C=600V, D=800V, E=1000V	34	DO-1	BY 255, BYD 33M	31a BY 226...227, BY 251...255, GP 208...M, ++
DS 130 A...E	Say	Si-Di	Rr, 100...800V, 1A, Uf<1V(1A) A=800V, B=600V, C=400V, D=200V, E=100V	31a	DO-27	1N4007	31a BY 126...127, BY 133...135, 1N4002...07, ++
DS 130 NA...NE		Si-Di	=DS 130 A...E	31a	DO-27	1N4007	31a -DS 130 A...E
DS 130 TA...TE		Si-Di	=DS 130 A...E	31a	DO-15	1N4007	31a -DS 130 A...E
DS 130 YA...YE		Si-Di	=DS 130 A...E	31a	DO-21	1N4007	31a -DS 130 A...E
DS 131 A.B	Say	Si-Di	Dual, A=100, B=200V, 2x0,9A, Uf<1V(0,9A)	12e	(12x9x5)	2x BY 255	31a 2xBY251...255, 2xBY259/..., 2xGP208...M, ++
DS 132 A.B	Say	Si-Di	=DS 131 A.B	12h	(12x9x5)	2x BY 255	31a -DS 131 A.B
DS 133 A.B	Say	Si-Di	=DS 131 A.B	12r	(12x9x5)	2x BY 255	31a -DS 131 A.B
DS 135 C...F	Say	Si-Di	Rr, 50...400V, 1/15A, Uf<1V(1A) C=400V, D=200V, E=100V, F=50V	31a	SOD-22	1N4007	31a BY 126...127, BY 133...135, 1N4001...07, ++
DS 140	Say	Si-Di	TV Damper, 700/750V, -/13A, Uf<1,2V(1,5A), <360ns	34b	DO-1	BY 228	31a BY 399, BYW 14...16/..., BYW 96/...
DS 140 DC	Hfo	TTL-Logic	Schottky Interface, Power Driver	14-DIP			SN 74S140
DS 150 A...C	Say	Si-Di	Rr, 200...600V, 1,5A, Uf<0,93V(1,5A) A=200, B=400, C=600V	31a	(7x6mm0)	BYD 33 M	31a BY 226...227, BY 251...255, GP 20D...M, ++
DS 157 DC	Hfo	TTL-Logic	Schottky Interface, Multiplexer	16-DIP			SN 74S157
DS 160 A.B	Say	Si-Di	kV-Rr, A=9kV, B=12kV, 0,55A				-
DS 185 D...F	Say	Si-Br	Br Rr, 50...200V, 1,3A, Uf<0,9V(0,65A) D=200V, E=100V, F=50V	33(--+--)	(20x22x6)	B250C1500	B30C1500...B150C1500, etc.
DS 230 A...D	Say	Si-Di	Frr, 300...1000V, 0,3A, Uf<1,5V(0,5A), <300ns A=300V, B=600V, C=800V, D=1000V	31a	DO-27	BA 159	31a BA 157...159, BY 204/..., BY 208/..., ++
DS 330 A...D	Say	Si-Di	Frr, 400...1000V, 0,13A, Uf<2,5V(0,1A), <300ns A=400V, B=600V, C=800V, D=1000V	31a	DO-27	BA 159	31a BA 157...159, BY 204/..., BY 208/..., ++
DS 410		Si-Di	=BA 127	31a		1N4148	31a -BA 127
DS 430	Say	Si-St	20mA, 0,55...0,8V(1,5mA)	31a	SOD-17	(1N4148)	31a BA 216, BA 314...315
DS 441	Say	Si-Di	Uni, 30/35V, 0,1/0,3A, Uf<1,3V(0,1A)	31a	DO-35	1N4148	31a BA 127, BA 147/50, BA 187...190, 1N4148++
DS 442	Say	Si-Di	SS, 30/35V, 0,12/0,36V, Uf<0,65V(1,5mA), <4ns	31a	DO-35	1N4148	31a BAW 62, BAW 76, BAX 95, 1N4148...49, ++
DS 442 X	Say	Si-Di	=DS 442: 50/55V, 0,13/0,4A, <2ns	31a	DO-35	1N4148	31a BAW 62, BAW 76, BAX 95, 1N4148...49, ++
DS 446	Say	Si-Di	SS, 100/105V, 0,2/0,5A, Uf<0,65V(1,5mA), 2<4ns	31a	DO-35	(1N4148)	31a BAV 14
DS 448	Say	Si-Di	SS, 30/35V, 0,12/0,36A, Uf<1V(50mA), <4ns	31a	DO-35	1N4148	31a BAW 62, BAW 76, BAX 95, 1N4148...49, ++
DS 452	Say	Si-Di	Uni, 200/220V, 0,1/0,3A, Uf<1V(0,1A)	31a	DO-35	BA 159	31a BAY 20, BAY 46, BAY 88, BA 157...159
DS 454	Say	Si-Di	=DS 452: 300/320V	31a	DO-35	BA 159	31a BA 157...159, BAY 46, BAY 88, BA 157...159, ++
DS 462	Say	Si-Di	Uni, S, 200/250V, 0,2/0,6A, Uf<1,2V(0,1A), <60ns	31a	DO-35	BA 159	31a BAY 21, BAY 46, BAY 88, BA 157...159
DS 464	Say	Si-Di	=DS 462: 250/300V	31a	DO-35	BA 159	31a BAY 21, BAY 46, BAY 88, BA 157...159
DS 1488	Nsc	I/O-IC	4x Leitungstreiber/Line Driver f. RS232	14-DIP			MC 1488, SN 75188, XR 1488, μ A 1488
DS 1489(A)	Nsc	I/O-IC	4x Leitungsempfänger/Line Receiver f. RS232	14-DIP			MC1489(A), SN75189(A), XR1489(A), μ A1489(A)
DS 2510 DC	Hfo	TTL-IC	Schottky Interface, 4-Bit Shifter	16-DIP			Am 25S10N
DS 2610 DC	Hfo	TTL-IC	Schottky Interface, 4x Bus-I/O	16-DIP			Am 26S10N
DS 3486	Mot	I/O-IC	=MC 3486L,P	16-DIC/DIP			-MC 3486
DS 3487	Mot	I/O-IC	=MC 3487L,P	16-DIC/DIP			-MC 3487
DS 8205 D	Hfo	TTL-IC	Schottky, 1/8-Binärdecoder/Binary Decoder	16-DIP			i 8205
DS 8212 D	Hfo	TTL-IC	Schottky, 8-Bit Bustreiber/Bus Driver	24-DIP			i 8212
DS 8216 D	Hfo	TTL-IC	Schottky, 4-Bit Bustreiber/Bus Driver	16-DIP			i 8216
DS 8282 D	Hfo	TTL-IC	Schottky, 8-Bit Bustreiber/Bus Driver	20-DIP			i 8282
DS 8283 D	Hfo	TTL-IC	Schottky, 8-Bit Bustreiber/Bus Driver	20-DIP			i 8283
DS 8286 D	Hfo	TTL-IC	Schottky, 8-Bit Bustreiber/Bus Driver	20-DIP			i 8286
DS 8287 D	Hfo	TTL-IC	Schottky, 8-Bit Bustreiber/Bus Driver	20-DIP			i 8287
DS 8601 DC	Hfo	I/O-IC	DMA-Logic	20-DIP			-
DS 8609 DC	Hfo	I/O-IC	Ser.-Par./Par.-Ser. Converter	40-DIP			DC 018
DS 8638 DC	Hfo	DIG-IC	8-Bit Bustreiber/Bus Driver, bidirectional	20-DIP			DC 021
DS 8640 N	Nsc	TTL-IC	Bus-Empfänger, Bus Receiver	14-DIP			DL 8640DC
DS 8641 N	Nsc	TTL-IC	Bus-Empfänger/Treiber, Bus Receiver/Driver	16-DIP			DL 8641DC
DS 75107...	Nsc	I/O-IC	μ A 75107...				μ A 75107...
DS 75108...	Nsc	I/O-IC	μ A 75108...				μ A 75108...
DS 75150...	Nsc	I/O-IC	μ A 75150...				μ A 75150...
DS 75154...	Nsc	I/O-IC	μ A 75154...				μ A 75154...
DS 75450...	Nsc	I/O-IC	μ A 75450...				μ A 75450...
DS 75491...	Nsc	I/O-IC	μ A 75491...				μ A 75491...
DS 80612 DC	Hfo	DIG-IC	Taktgenerator/Clock Generator	18-DIP			-
DT							
DT		Si-N	=2SC4112 (SMD-Markung)	35	SOT-23		-2SC4112
DT		Si-N-Darl	=2SD1471-DT (SMD-Markung)	39	SOT-89		-2SD1471
DT		Si-P	=BCW 67RA (SMD-Markung)	35	SOT-23		-BCW 67RA
DT		Si-P	=HQ 1L20 (SMD-Markung)	39	SOT-89		-HQ 1...
DT		Si-N	=XN 6A554 (SMD-Markung)	46	SOT-163		-XM 6A554
DT 1-02...12	Tho	50Hz-Thy	200...1200V, 1,3A(Tc=135°C), Igt/Ih=15/<40mA	27n	(10x9x5)		B5A30...M, B5C07...
DT 5 A114E	Nec	Si-P+R	5xPNP, common Emitter, Rb=Rbe=10k Ω , 50V, 50mA	12-SQP			-
DT 5 A124E	Nec	Si-P+R	5xPNP, common Emitter, Rb=Rbe=22k Ω , 50V, 30mA	12-SQP			-
DT 5 A143E	Nec	Si-P+R	5xPNP, common Emitter, Rb=Rbe=4,7k Ω , 50V, 100mA	12-SQP			-
DT 5 A143X	Nec	Si-P+R	5xPNP, common Emit., Rb=4,7k Ω , Rbe=10k Ω , 50V, 100mA	12-SQP			-
DT 5 A144E	Nec	Si-P+R	5xPNP, common Emitter, Rb=Rbe=47k Ω , 50V, 30mA	12-SQP			-
DT 5 C114E	Nec	Si-N+R	5xNPN, common Emitter, Rb=Rbe=10k Ω , 50V, 50mA	12-SQP			-
DT 5 C124E	Nec	Si-N+R	5xNPN, common Emitter, Rb=Rbe=22k Ω , 50V, 30mA	12-SQP			-
DT 5 C143E	Nec	Si-N+R	5xNPN, common Emitter, Rb=Rbe=4,7k Ω , 50V, 100mA	12-SQP			-
DT 5 C144E	Nec	Si-N+R	5xNPN, common Emitter, Rb=Rbe=47k Ω , 50V, 30mA	12-SQP			-
DT 06-02...10	Tho	50Hz-Thy	200...1000V, 0,8A(Tc=125°C), Igt/Ih=10/<20mA	2a	T0-5		TAG 612-..., S 2600..., TAG 613-..., ++
DTA							
DTA 1 C...E	Say	Triac	200...400V, 1A-(Tc=74°C), Igt/Ih=10/<10mA C=200V, E=400V	7p	T0-92		Z 0101..., Z 0104..., Z 0106
DTA1D3R(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=2,7k, Rbe=1k Ω , 50V, 70/100mA, 0,3W, 250MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA....(A): 100mA Version Serie/Series	9c, 41c			-
DTA 1 D3RE		Si-P+R	=DTA 1D3R... SMD	35a(1,6mm)	SS Mini		-
DTA 1 D3RK(A)		Si-P+R	=DTA 1D3R... SMD	35a(2,9mm)	SOT-23		-
DTA 1 D3RU(A)		Si-P+R	=DTA 1D3R... SMD	35a(2mm)	SOT-323		-
DTA 2 B...E	Say	Triac	100...400V, 2A-(Tc=70°C), Igt/Ih<15/<25mA B=100V, C=200V, E=400V	13j	T0-202		TAG 137-..., TAG 138-...
DTA 3 E...G	Say	Triac	400...600V, 3A-(Tc=77°C), Igt/Ih<45/<25mA E=400V, F=500V, G=600V	13j	T0-202	(TAG 232-600) ⁴	17j Z 0409..., Z 0410...

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
DTA 05 B...E	Say	Triac	100...400V, 0.5A-(Ta=20°), Igt/Ih<15/<25mA B=100V, C=200V, E=400V	7l	TO-92		MAC 94(A)-..., MAC 95(A)-...
DTA 6 C...G(-N)	Say	Triac	200...600V, 6A-(Tc=104°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17j	TO-220		MAC 216A-..., T 2500..., TAG 220-...
DTA 08 E	Say	Triac	400V, 0.8A-(Tc=60°), Igt/Ih<10/<10mA	7p	TO-92		MAC 94(A)-..., MAC 95(A)-..., MAC 96(A)-...
DTA 10 E...G	Say	Triac	400...600V, 10A-(Tc=91°), Igt/Ih<80/<30mA E=400V, F=500V, G=600V	17j	TO-220		BTA 22-..., TAG 250-..., TAG 251-...
DTA 25 C...G	Say	Triac	200...600V, 25A-(Tc=73°), Igt/Ih<50/<70mA C=200V, E=400V, G=600V	65l			MAC 525(A)-...
DTA113Z(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=1k, Rbe=10kΩ, 50V, 100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c			AN 1A3Q, UN 4119
DTA 113 ZE		Si-P+R	=DTA 113Z...: SMD	35a(1,6mm)	SS Mini		-
DTA 113 ZK(A)		Si-P+R	=DTA 113Z...: SMD	35a(2,9mm)	SOT-23		FN 1A3Q, UN 2119
DTA 113 ZU(A)		Si-P+R	=DTA 113Z...: SMD	35a(2mm)	SOT-323		-
DTA114E(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=Rbe=10kΩ, 50V, 50/100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c	(BC 556) ¹⁸	7a	AN 1A4M, RN 2002, UN 4111, 2SA1348,++
DTA 114 EE		Si-P+R	=DTA 114E...: SMD	35a(1,6mm)	SS Mini		-
DTA 114 EK(A)		Si-P+R	=DTA 114E...: SMD	35a(2,9mm)	SOT-23		FN 1A4M, RN 2402, UN2111, 2SA1344,++
DTA 114 EU(A)		Si-P+R	=DTA 114E...: SMD	35a(2mm)	SOT-323		2SA1678
DTA114G(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=..., Rbe=10kΩ, 50/50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	-
DTA 114 GE		Si-P+R	=DTA 114G...: SMD	35a(1,6mm)	SS Mini		-
DTA 114 GK(A)		Si-P+R	=DTA 114G...: SMD	35a(2,9mm)	SOT-23		-
DTA 114 GU(A)		Si-P+R	=DTA 114G...: SMD	35a(2mm)	SOT-323		-
DTA114T(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=10kΩ, Rbe=..., 50/50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1A4Z, RN 2011, UN 4115, 2SA1497,++
DTA 114 TE		Si-P+R	=DTA 114T...: SMD	35a(1,6mm)	SS Mini		-
DTA 114 TK(A)		Si-P+R	=DTA 114T...: SMD	35a(2,9mm)	SOT-23		FN 1A4Z, RN 2411, UN 2115, 2SA1496,++
DTA 114 TU(A)		Si-P+R	=DTA 114T...: SMD	35a(2mm)	SOT-323		-
DTA114W(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=10k, Rbe=4,7kΩ, 50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	UN 411K
DTA 114 WE		Si-P+R	=DTA 114W...: SMD	35a(1,6mm)	SS Mini		-
DTA 114 WK(A)		Si-P+R	=DTA 114W...: SMD	35a(2,9mm)	SOT-23		-
DTA 114 WU(A)		Si-P+R	=DTA 114W...: SMD	35a(2mm)	SOT-323		-
DTA114Y(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=10k, Rbe=47kΩ, 50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1A4P, RN 2007, UN 4114, 2SA1564,++
DTA 114 YE		Si-P+R	=DTA 114Y...: SMD	35a(1,6mm)	SS Mini		-
DTA 114 YK(A)		Si-P+R	=DTA 114Y...: SMD	35a(2,9mm)	SOT-23		FN 1A4P, RN 2407, UN 2114, 2SA1563,++
DTA 114 YU(A)		Si-P+R	=DTA 114Y...: SMD	35a(2mm)	SOT-323		-
DTA115E(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=Rbe=100kΩ, 50V, 20/100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c			-
DTA 115 EE		Si-P+R	=DTA 115E...: SMD	35a(1,6mm)	SS Mini		-
DTA 115 EK(A)		Si-P+R	=DTA 115E...: SMD	35a(2,9mm)	SOT-23		-
DTA 115 EU(A)		Si-P+R	=DTA 115E...: SMD	35a(2mm)	SOT-323		-
DTA115G(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=..., Rbe=100kΩ, 50/50V, 100mA, 0.3W, 250MHz	9c, 41c			-
DTA 115 GE		Si-P+R	=DTA 115G...: SMD	35a(1,6mm)	SS Mini		-
DTA 115 GK(A)		Si-P+R	=DTA 115G...: SMD	35a(2,9mm)	SOT-23		-
DTA 115 GU(A)		Si-P+R	=DTA 115G...: SMD	35a(2mm)	SOT-323		-
DTA115T(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=100kΩ, Rbe=..., 50/50V, 100mA, 0.3W, 250MHz	9c, 41c			-
DTA 115 TE		Si-P+R	=DTA 115T...: SMD	35a(1,6mm)	SS Mini		-
DTA 115 TK(A)		Si-P+R	=DTA 115T...: SMD	35a(2,9mm)	SOT-23		-
DTA 115 TU(A)		Si-P+R	=DTA 115T...: SMD	35a(2mm)	SOT-323		-
DTA123E(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=Rbe=2,2kΩ, 50V, 100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c			-
DTA 123 EE		Si-P+R	=DTA 123E...: SMD	35a(1,6mm)	SS Mini		-
DTA 123 EK(A)		Si-P+R	=DTA 123E...: SMD	35a(2,9mm)	SOT-23		-
DTA 123 EU(A)		Si-P+R	=DTA 123E...: SMD	35a(2mm)	SOT-323		-
DTA123J(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=2,2k, Rbe=47kΩ, 50V, 100mA, 0.3W, 250MHz	9c, 41c			RN 2005
DTA 123 JE		Si-P+R	=DTA 123J...: SMD	35a(1,6mm)	SS Mini		-
DTA 123 JK(A)		Si-P+R	=DTA 123J...: SMD	35a(2,9mm)	SOT-23		RN 2405
DTA 123 JU(A)		Si-P+R	=DTA 123J...: SMD	35a(2mm)	SOT-323		-
DTA123Y(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=2,2k, Rbe=10kΩ, 50V, 100mA, 0.3W, 250MHz	9c, 41c			UN 411H, 2SA1503
DTA 123 YE		Si-P+R	=DTA 123Y...: SMD	35a(1,6mm)	SS Mini		-
DTA 123 YK(A)		Si-P+R	=DTA 123Y...: SMD	35a(2,9mm)	SOT-23		UN 211H, 2SA1502
DTA 123 YU(A)		Si-P+R	=DTA 123Y...: SMD	35a(2mm)	SOT-323		2SA1722
DTA124E(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=22k, Rbe=22kΩ, 50V, 100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c	(BC 556) ¹⁸	7a	AN 1F4M, RN 2003, UN 4112, 2SA1346,++
DTA 124 EE		Si-P+R	=DTA 124E...: SMD	35a(1,6mm)	SS Mini		-
DTA 124 EK(A)		Si-P+R	=DTA 124E...: SMD	35a(2,9mm)	SOT-23		FN 1F4M, RN 2403, UN 2112, 2SA1342,++
DTA 124 EU(A)		Si-P+R	=DTA 124E...: SMD	35a(2mm)	SOT-323		2SA1677
DTA124G(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=..., Rbe=22kΩ, 50/50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	2SA1574
DTA 124 GE		Si-P+R	=DTA 124G...: SMD	35a(1,6mm)	SS Mini		-
DTA 124 GK(A)		Si-P+R	=DTA 124G...: SMD	35a(2,9mm)	SOT-23		2SA1573
DTA 124 GU(A)		Si-P+R	=DTA 124G...: SMD	35a(2mm)	SOT-323		-
DTA124T(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=22kΩ, Rbe=..., 50/50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1F4Z, KSR 2011, UN 4117, 2SA1590
DTA 124 TE		Si-P+R	=DTA 124T...: SMD	35a(1,6mm)	SS Mini		-
DTA 124 TK(A)		Si-P+R	=DTA 124T...: SMD	35a(2,9mm)	SOT-23		FN 1F4Z, KSR 2111, UN 2117, 2SA1598
DTA 124 TU(A)		Si-P+R	=DTA 124T...: SMD	35a(2mm)	SOT-323		-
DTA124X(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=22k, Rbe=47kΩ, 50V, 100mA, 0.3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1F4N, KSR 2007, RN 2008
DTA 124 XE		Si-P+R	=DTA 124X...: SMD	35a(1,6mm)	SS Mini		-
DTA 124 XK(A)		Si-P+R	=DTA 124X...: SMD	35a(2,9mm)	SOT-23		FN 1F4N, KSR 2107, RN 2408
DTA 124 XU(A)		Si-P+R	=DTA 124X...: SMD	35a(2mm)	SOT-323		-
DTA125T(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=200kΩ, Rbe=..., 50/50V, 100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c			-
DTA 125 TK		Si-P+R	=DTA 125T...: SMD	35a(2,9mm)	SOT-23		-
DTA 125 TU		Si-P+R	=DTA 125T...: SMD	35a(2mm)	SOT-323		-
DTA143E(A,F.L.S.V) (A)	Rhm	Si-P+R	S, Rb=Rbe=4,7kΩ, 50V, 100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c			AN 1L3M, RN 2001, UN 411L, 2SA1656,++
DTA 143 EE		Si-P+R	=DTA 143E...: SMD	35a(1,6mm)	SS Mini		-
DTA 143 EK(A)		Si-P+R	=DTA 143E...: SMD	35a(2,9mm)	SOT-23		FN 1L3M, RN 2401, UN 211L, 2SA1655,++

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
DTA 143 EU(A)		Si-P+R	=DTA 143E... SMD	35a(2mm)	SOT-323		-
DTA143T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=4,7kΩ, Rbe=-, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			AN 1L3Z, RN 2010, UN 4116, 2SA1511,++
DTA 143 TE		Si-P+R	=DTA 143T... SMD	35a(1,6mm)	SS Mini		-
DTA 143 TK(A)		Si-P+R	=DTA 143T... SMD	35a(2,9mm)	SOT-23		FN 1L3Z, RN 2410, UN 2116, 2SA1510,++
DTA 143 TU(A)		Si-P+R	=DTA 143T... SMD	35a(2mm)	SOT-323		-
DTA143X(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=4,7k, Rbe=10kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c			AN 1L3N, KSR 2005, UN 411F, 2SA1654
DTA 143 XE		Si-P+R	=DTA 143X... SMD	35a(1,6mm)	SS Mini		-
DTA 143 XK(A)		Si-P+R	=DTA 143X... SMD	35a(2,9mm)	SOT-23		FN 1L3N, KSR 2105, UN 211F, 2SA1653
DTA 143 XU(A)		Si-P+R	=DTA 143X... SMD	35a(2mm)	SOT-323		-
DTA143Z(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=4,7k, Rbe=47kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c			RN 2006, 2SA1591, 2SA1616
DTA 143 ZE		Si-P+R	=DTA 143Z... SMD	35a(1,6mm)	SS Mini		-
DTA 143 ZK(A)		Si-P+R	=DTA 143Z... SMD	35a(2,9mm)	SOT-23		RN 2406, 2SA1597
DTA 143 ZU(A)		Si-P+R	=DTA 143Z... SMD	35a(2mm)	SOT-323		-
DTA144E(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=Rbe=47kΩ, 50V, 30/100mA, 0,3W, 250MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTA...(...):A: 100mA Version Serie/Series	9c, 41c	(BC 556) ¹⁸	7a	AN 1L4M, RN 2004, UN 4113, 2SA1345,++
DTA 144 EE		Si-P+R	=DTA 144E... SMD	35a(1,6mm)	SS Mini		-
DTA 144 EK(A)		Si-P+R	=DTA 144E... SMD	35a(2,9mm)	SOT-23		FN 1L4M, RN 2404, UN 2113, 2SA1341,++
DTA 144 EU(A)		Si-P+R	=DTA 144E... SMD	35a(2mm)	SOT-323		2SA1676
DTA144G(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=-, Rbe=47kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	2SA1572
DTA 144 GE		Si-P+R	=DTA 144G... SMD	35a(1,6mm)	SS Mini		-
DTA 144 GK(A)		Si-P+R	=DTA 144G... SMD	35a(2,9mm)	SOT-23		2SA1571
DTA 144 GU(A)		Si-P+R	=DTA 144G... SMD	35a(2mm)	SOT-323		-
DTA144T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=47kΩ, Rbe=-, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1L4Z, KSR 2012, UN 4110, 2SA1509
DTA 144 TE		Si-P+R	=DTA 144T... SMD	35a(1,6mm)	SS Mini		-
DTA 144 TK(A)		Si-P+R	=DTA 144T... SMD	35a(2,9mm)	SOT-23		FN 1L4Z, KSR 2112, UN 2210, 2SA1508
DTA 144 TU(A)		Si-P+R	=DTA 144T... SMD	35a(2mm)	SOT-323		-
DTA124V(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=47k, Rbe=10kΩ, 50V, 30/100mA, 0,3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	UN 411D
DTA 144 VE		Si-P+R	=DTA 144V... SMD	35a(1,6mm)	SS Mini		-
DTA 144 VK(A)		Si-P+R	=DTA 144V... SMD	35a(2,9mm)	SOT-23		UN 211D
DTA 144 VU(A)		Si-P+R	=DTA 144V... SMD	35a(2mm)	SOT-323		-
DTA144W(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=47k, Rbe=22kΩ, 50V, 30/100mA, 0,3W, 250MHz	9c, 41c	(BC 556) ¹⁸	7a	AN 1L4L, RN 2009, UN 411E, 2SA1347,++
DTA 144 WE		Si-P+R	=DTA 144W... SMD	35a(1,6mm)	SS Mini		-
DTA 144 WK(A)		Si-P+R	=DTA 144W... SMD	35a(2,9mm)	SOT-23		FN 1L4L, RN 2409, UN 211E, 2SA1343,++
DTA 144 WU(A)		Si-P+R	=DTA 144W... SMD	35a(2mm)	SOT-323		-
DTB							
DTB 3 B...G	Say	Triac	100...600V, 3A-(Tc=71°), Igt/Ih<30/<25mA B=100V, C=200V, E=400V, G=600V	13j	TO-202		TAG 136-..., TAG 137-...
DTB113E(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=Rbe=1kΩ, 50V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 2221
DTB 113 EK		Si-P+R	=DTB 113E... SMD	35a(2,9mm)	SOT-23		-
DTB113Z(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=1kΩ, Rbe=10kΩ, 50V, 500mA, 0,6W, 200MHz	9c, 41c			RN 2226
DTB 113 ZK		Si-P+R	=DTB 113Z... SMD	35a(2,9mm)	SOT-23		-
DTB114E(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=Rbe=10kΩ, 50V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 2224, UN 4123, 2SA1522, 2SA1526
DTB 114 EK		Si-P+R	=DTB 114E... SMD	35a(2,9mm)	SOT-23		UN 2123, 2SA1518
DTB114G(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=-, Rbe=10kΩ, 50/50V, 500mA, 0,6W, 200MHz	9c, 41c			-
DTB 114 GK		Si-P+R	=DTB 114G... SMD	35a(2,9mm)	SOT-23		-
DTB114T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=10kΩ, Rbe=-, 50/40V, 500mA, 0,6W, 200MHz	9c, 41c			-
DTB 114 TK		Si-P+R	=DTB 114T... SMD	35a(2,9mm)	SOT-23		-
DTB122J(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=220Ω, Rbe=4,7kΩ, 50V, 500mA, 0,6W, 250MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			-
DTB 122 JK		Si-P+R	=DTB 122J... SMD	35a(2,9mm)	SOT-23		-
DTB123E(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=Rbe=2,2kΩ, 50V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 2222, UN 4121, 2SA1525, 2SA1529
DTB 123 EK		Si-P+R	=DTB 123E... SMD	35a(2,9mm)	SOT-23		UN 2121, 2SA1521
DTB123T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=2,2kΩ, Rbe=-, 50/40V, 500mA, 0,6W, 200MHz	9c, 41c			-
DTB 123 TK		Si-P+R	=DTB 123T... SMD	35a(2,9mm)	SOT-23		-
DTB123Y(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=2,2k, Rbe=10kΩ, 50V, 500mA, 0,6W, 200MHz	9c, 41c			RN 2227, UN 4124, 2SA1524, 2SA1528
DTB 123 YK		Si-P+R	=DTB 123Y... SMD	35a(2,9mm)	SOT-23		UN 2124, 2SA1520
DTB133H(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=3,3k, Rbe=10kΩ, 50V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			-
DTB 133 HK		Si-P+R	=DTB 133H... SMD	35a(2,9mm)	SOT-23		-
DTB143E(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=Rbe=4,7kΩ, 50V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 1223, UN 4122, 2SA1523, 2SA1527
DTB 143 EK		Si-P+R	=DTB 143E... SMD	35a(2,9mm)	SOT-23		UN 2122, 2SA1519
DTB143T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=4,7kΩ, Rbe=-, 50/40V, 500mA, 0,6W, 200MHz	9c, 41c			-
DTB 143 TK		Si-P+R	=DTB 143T... SMD	35a(2,9mm)	SOT-23		-
DTB163T(A,F,L,S,V)	Rhm	Si-P+R	S, Rb=6,8kΩ, Rbe=-, 50/40V, 500mA, 0,6W, 200MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			-
DTB 163 TK		Si-P+R	=DTB 163T... SMD	35a(2,9mm)	SOT-23		-
DTC							
DTC1D3R(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=2,7k, Rbe=1kΩ, 50V, 70/100mA, 0,3W, 250MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(...):A: 100mA Version Serie/Series	9c, 41c			-
DTC 1 D3RE		Si-N+R	=DTC 1D3R... SMD	35a(1,6mm)	SS Mini		-
DTC 1 D3RK(A)		Si-N+R	=DTC 1D3R... SMD	35a(2,9mm)	SOT-23		-
DTC 1 D3RU(A)		Si-N+R	=DTC 1D3R... SMD	35a(2mm)	SOT-323		-
DTC 8 C...G(-N)	Say	Triac	200...600V, 8A=(Tc=105°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17j	TO-220		T 2800-..., T 2850-..., TAG 224-...
DTC 10 C-N...G-N	Say	Triac	200...600V, 10A=(Tc=98°), Igt/Ih<50/<50mA C-N=200V, E-N=400V, G-N=600V	17j	TO-220		BTA 22-..., TAG 250-..., TAG 251-...
DTC 12 C...G(-N)	Say	Triac	200...600V, 12A=(Tc=98°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17j	TO-220		BTA23-..., BT138-..., TAG255-..., TAG256-...
DTC113Z(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=1k, Rbe=10kΩ, 50V, 100mA, 0,3W, 250MHz A,F,L,V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(...):A: 100mA Version Serie/Series	9c, 41c			AA 1A3Q, UN 4219
DTC 113 ZE		Si-N+R	=DTC 113Z... SMD	35a(1,6mm)	SS Mini		-
DTC 113 ZK(A)		Si-N+R	=DTC 113Z... SMD	35a(2,9mm)	SOT-23		FA 1A3Q, UN 2219
DTC 113 ZU(A)		Si-N+R	=DTC 113Z... SMD	35a(2mm)	SOT-323		-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
DTC114E(A,F,L,S,V) (A)	Rhm	Si-N+R	S, Rb=Rbe=10kΩ, 50V, 50/100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(A): 100mA Version Serie/Series	9c, 41c	(BC 546) ¹⁸	7a	AA 1A4M, RN 1002, UN 4211, 2SC3402,++
DTC 114 EE		Si-N+R	=DTC 114E... SMD	35a(1,6mm) SS Mini			-
DTC 114 EK(A)		Si-N+R	=DTC 114E... SMD	35a(2,9mm) SOT-23			FA 1A4M, RN 1402, UN 2211, 2SC3398,++
DTC 114 EU(A)		Si-N+R	=DTC 114E... SMD	35a(2mm) SOT-323			2SC4398
DTC114G(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=, Rbe=10kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	-
DTC 114 GE		Si-N+R	=DTC 114G... SMD	35a(1,6mm) SS Mini			-
DTC 114 GK(A)		Si-N+R	=DTC 114G... SMD	35a(2,9mm) SOT-23			-
DTC 114 GU(A)		Si-N+R	=DTC 114G... SMD	35a(2mm) SOT-323			-
DTC114T(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=10kΩ, Rbe=, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	AA 1A4Z, RN 1011, UN 4215, 2SC3860,++
DTC 114 TE		Si-N+R	=DTC 114T... SMD	35a(1,6mm) SS Mini			-
DTC 114 TK(A)		Si-N+R	=DTC 114T... SMD	35a(2,9mm) SOT-23			FA 1A4Z, RN 1411, UN 2215, 2SC3859,++
DTC 114 TU(A)		Si-N+R	=DTC 114T... SMD	35a(2mm) SOT-323			-
DTC114W(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=10k, Rbe=4,7kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	UN 421K
DTC 114 WE		Si-N+R	=DTC 114W... SMD	35a(1,6mm) SS Mini			-
DTC 114 WK(A)		Si-N+R	=DTC 114W... SMD	35a(2,9mm) SOT-23			-
DTC 114 WU(A)		Si-N+R	=DTC 114W... SMD	35a(2mm) SOT-323			-
DTC114Y(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=10k, Rbe=47kΩ, 50V, 70/100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	AA 1A4P, RN 1007, UN 4214, 2SC4048,++
DTC 114 YE		Si-N+R	=DTC 114Y... SMD	35a(1,6mm) SS Mini			-
DTC 114 YK(A)		Si-N+R	=DTC 114Y... SMD	35a(2,9mm) SOT-23			FA 1A4P, RN 1407, UN 2214, 2SC4047,++
DTC 114 YU(A)		Si-N+R	=DTC 114Y... SMD	35a(2mm) SOT-323			-
DTC115E(A,F,L,S,V) (A)	Rhm	Si-N+R	S, Rb=Rbe=100kΩ, 50V, 20/100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(A): 100mA Version Serie/Series	9c, 41c			-
DTC 115 EE		Si-N+R	=DTC 115E... SMD	35a(1,6mm) SS Mini			-
DTC 115 EK(A)		Si-N+R	=DTC 115E... SMD	35a(2,9mm) SOT-23			-
DTC 115 EU(A)		Si-N+R	=DTC 115E... SMD	35a(2mm) SOT-323			-
DTC115G(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=, Rbe=100kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			-
DTC 115 GE		Si-N+R	=DTC 115G... SMD	35a(1,6mm) SS Mini			-
DTC 115 GK(A)		Si-N+R	=DTC 115G... SMD	35a(2,9mm) SOT-23			-
DTC 115 GU(A)		Si-N+R	=DTC 115G... SMD	35a(2mm) SOT-323			-
DTC115T(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=100kΩ, Rbe=, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			-
DTC 115 TE		Si-N+R	=DTC 115T... SMD	35a(1,6mm) SS Mini			-
DTC 115 TK(A)		Si-N+R	=DTC 115T... SMD	35a(2,9mm) SOT-23			-
DTC 115 TU(A)		Si-N+R	=DTC 115T... SMD	35a(2mm) SOT-323			-
DTC115U(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=100k, Rbe=10kΩ, 50V, 20/100mA, 0,3W, 250MHz	9c, 41c			-
DTC 115 UK		Si-N+R	=DTC 115U... SMD	35a(2,9mm) SOT-23			-
DTC 115 UU		Si-N+R	=DTC 115U... SMD	35a(2mm) SOT-323			-
DTC123E(A,F,L,S,V) (A)	Rhm	Si-N+R	S, Rb=Rbe=2,2kΩ, 50V, 100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(A): 100mA Version Serie/Series	9c, 41c			-
DTC 123 EE		Si-N+R	=DTC 123E... SMD	35a(1,6mm) SS Mini			-
DTC 123 EK(A)		Si-N+R	=DTC 123E... SMD	35a(2,9mm) SOT-23			-
DTC 123 EU(A)		Si-N+R	=DTC 123E... SMD	35a(2mm) SOT-323			-
DTC123J(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=2,2k, Rbe=47kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c			RN 1005
DTC 123 JE		Si-N+R	=DTC 123J... SMD	35a(1,6mm) SS Mini			-
DTC 123 JK(A)		Si-N+R	=DTC 123J... SMD	35a(2,9mm) SOT-23			BCR 108, RN 1405
DTC 123 JU(A)		Si-N+R	=DTC 123J... SMD	35a(2mm) SOT-323			-
DTC123Y(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=2,2k, Rbe=10kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c			UN 421H, 2SC3864
DTC 123 YE		Si-N+R	=DTC 123Y... SMD	35a(1,6mm) SS Mini			-
DTC 123 YK(A)		Si-N+R	=DTC 123Y... SMD	35a(2,9mm) SOT-23			UN 221H, 2SC3863
DTC 123 YU(A)		Si-N+R	=DTC 123Y... SMD	35a(2mm) SOT-323			2SC4498
DTC124E(A,F,L,S,V) (A)	Rhm	Si-N+R	S, Rb=Rbe=22kΩ, 50V, 30/100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(A): 100mA Version Serie/Series	9c, 41c	(BC 546) ¹⁸	7a	AA 1F4M, RN 1003, UN 4212, 2SC3400,++
DTC 124 EE		Si-N+R	=DTC 124E... SMD	35a(1,6mm) SS Mini			-
DTC 124 EK(A)		Si-N+R	=DTC 124E... SMD	35a(2,9mm) SOT-23			FA 1F4M, RN 1403, UN2212, 2SC3396,++
DTC 124 EU(A)		Si-N+R	=DTC 124E... SMD	35a(2mm) SOT-323			2SC4397
DTC124G(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=, Rbe=22kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	2SC4070
DTC 124 GE		Si-N+R	=DTC 124G... SMD	35a(1,6mm) SS Mini			-
DTC 124 GK(A)		Si-N+R	=DTC 124G... SMD	35a(2,9mm) SOT-23			2SC4069
DTC 124 GU(A)		Si-N+R	=DTC 124G... SMD	35a(2mm) SOT-323			-
DTC124T(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=22kΩ, Rbe=, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	AA 1F4Z, KSR 1011, UN 4217, 2SC4121,++
DTC 124 TE		Si-N+R	=DTC 124T... SMD	35a(1,6mm) SS Mini			-
DTC 124 TK(A)		Si-N+R	=DTC 124T... SMD	35a(2,9mm) SOT-23			FA 1F4Z, KSR 1111, UN 2217, 2SC4120
DTC 124 TU(A)		Si-N+R	=DTC 124T... SMD	35a(2mm) SOT-323			-
DTC124X(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=22k, Rbe=47kΩ, 50V, 100mA, 0,3W, 250MHz	9c, 41c	(BC 546) ¹⁸	7a	AA 1F4N, KSR 1007, RN 1008
DTC 124 XE		Si-N+R	=DTC 124X... SMD	35a(1,6mm) SS Mini			-
DTC 124 XK(A)		Si-N+R	=DTC 124X... SMD	35a(2,9mm) SOT-23			FA 1F4N, KSR 1107, RN 1408
DTC 124 XU(A)		Si-N+R	=DTC 124X... SMD	35a(2mm) SOT-323			-
DTC125T(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=200kΩ, Rbe=, 50/50V, 100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			-
DTC 125 TK		Si-N+R	=DTC 125T... SMD	35a(2,9mm) SOT-23			-
DTC 125 TU		Si-N+R	=DTC 125T... SMD	35a(2mm) SOT-323			-
DTC143E(A,F,L,S,V) (A)	Rhm	Si-N+R	S, Rb=4,7k, Rbe=4,7kΩ, 50V, 100mA, 0,3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(A): 100mA Version Serie/Series	9c, 41c			AA 1L3M, RN 1001, UN 421L, 2SC4363,++
DTC 143 EE		Si-N+R	=DTC 143E... SMD	35a(1,6mm) SS Mini			-
DTC 143 EK(A)		Si-N+R	=DTC 143E... SMD	35a(2,9mm) SOT-23			FA 1L3M, RN 1401, UN 221L, 2SC5362,++
DTC 143 EU(A)		Si-N+R	=DTC 143E... SMD	35a(2mm) SOT-323			-
DTC143T(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=4,7kΩ, Rbe=, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			AA 1L3Z, RN 1010, UN 4216, 2SC3901,++
DTC 143 TE		Si-N+R	=DTC 143T... SMD	35a(1,6mm) SS Mini			-
DTC 143 TK(A)		Si-N+R	=DTC 143T... SMD	35a(2,9mm) SOT-23			FA 1L3Z, RN 1410, UN 2216, 2SC3900,++
DTC 143 TU(A)		Si-N+R	=DTC 143T... SMD	35a(2mm) SOT-323			-
DTC143X(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=4,7k, Rbe=10kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			AA 1L3N, KSR 1005, UN 421F, 2SC4361
DTC 143 XE		Si-N+R	=DTC 143X... SMD	35a(1,6mm) SS Mini			-
DTC 143 XK(A)		Si-N+R	=DTC 143X... SMD	35a(2,9mm) SOT-23			FA 1L3N, UN 221F, 2SC4360
DTC 143 XU(A)		Si-N+R	=DTC 143X... SMD	35a(2mm) SOT-323			-
DTC143Z(A,F,L,S,V)	Rhm	Si-N+R	S, Rb=4,7k, Rbe=47kΩ, 50/50V, 100mA, 0,3W, 250MHz	9c, 41c			RN 1006, 2SC4133, 2SC4195
DTC 143 ZE		Si-N+R	=DTC 143Z... SMD	35a(1,6mm) SS Mini			-
DTC 143 ZK(A)		Si-N+R	=DTC 143Z... SMD	35a(2,9mm) SOT-23			RN 1406, 2SC4146
DTC 143 ZU(A)		Si-N+R	=DTC 143Z... SMD	35a(2mm) SOT-323			-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
DTC144E(A.F.L.S.V) (A)	Rhm	Si-N+R	S, Rb=Rbe=47kΩ, 50V, 30/100mA, 0.3W, 250MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c DTC...(...):A: 100mA Version Serie/Series	9c, 41c			AA 1L4M, RN 1004, UN 4213, 2SC3399,++	
DTC 144 EE		Si-N+R	=DTC 144E...: SMD	35a(1,6mm)	SS Mini		-	
DTC 144 EK(A)		Si-N+R	=DTC 144E...: SMD	35a(2,9mm)	SOT-23		FA 1L4M, RN 1404, UN 2213, 2SC3395,++	
DTC 144 EU(A)		Si-N+R	=DTC 144E...: SMD	35a(2mm)	SOT-323		2SC4396	
DTC144G(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=, Rbe=47kΩ, 50/50V, 100mA, 0.3W, 250MHz	9c, 41c			2SC4067	
DTC 144 GE		Si-N+R	=DTC 144G...: SMD	35a(1,6mm)	SS Mini		-	
DTC 144 GK(A)		Si-N+R	=DTC 144G...: SMD	35a(2,9mm)	SOT-23		2SC4066	
DTC 144 GU(A)		Si-N+R	=DTC 144G...: SMD	35a(2mm)	SOT-323		-	
DTC144T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=47kΩ, Rbe=, 50/50V, 100mA, 0.3W, 250MHz	9c, 41c			AA 1L4Z, KSR 1012, UN 4210, 2SC3899	
DTC 144 TE		Si-N+R	=DTC 144T...: SMD	35a(1,6mm)	SS Mini		-	
DTC 144 TK(A)		Si-N+R	=DTC 144T...: SMD	35a(2,9mm)	SOT-23		FA 1L4Z, KSR 1112, UN 2210, 2SC3898	
DTC 144 TU(A)		Si-N+R	=DTC 144T...: SMD	35a(2mm)	SOT-323		FA 1L4Z, KSR 1112, UN 2210, 2SC3898	
DTC144V(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=47k, Rbe=10kΩ, 50V, 30/100mA, 0.3W, 250MHz	9c, 41c			UN 421D	
DTC 144 VE		Si-N+R	=DTC 144V...: SMD	35a(1,6mm)	SS Mini		-	
DTC 144 VK(A)		Si-N+R	=DTC 144V...: SMD	35a(2,9mm)	SOT-23		UN 221D	
DTC 144 VU(A)		Si-N+R	=DTC 144V...: SMD	35a(2mm)	SOT-323		-	
DTC144W(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=47k, Rbe=22kΩ, 50V, 30/100mA, 0.3W, 250MHz	9c, 41c			AA 1L4L, RN 1009, UN 421E, 2SC3401,++	
DTC 144 WE		Si-N+R	=DTC 144W...: SMD	35a(1,6mm)	SS Mini		-	
DTC 144 WK(A)		Si-N+R	=DTC 144W...: SMD	35a(2,9mm)	SOT-23		FA 1L4L, RN 1409, UN 221E, 2SC3397,++	
DTC 144 WU(A)		Si-N+R	=DTC 144W...: SMD	35a(2mm)	SOT-323		-	
DTC314T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=10kΩ, Rbe=, 30/15V, 600mA, 0.3W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			DTD 114T...	
DTC 314 TK		Si-N+R	=DTC 314T...: SMD	35a(2,9mm)	SOT-23		DTD 114TK	
DTC323T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=2.2kΩ, Rbe=, 30/15V, 600mA, 0.3W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			DTD 123T...	
DTC 323 TK		Si-N+R	=DTC 323T...: SMD	35a(2,9mm)	SOT-23		DTD 123TK	
DTC343T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=4.7kΩ, Rbe=, 30/15V, 600mA, 0.3W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			DTD 143T...	
DTC 343 TK		Si-N+R	=DTC 343T...: SMD	35a(2,9mm)	SOT-23		DTD 143TK	
DTC363E(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=Rbe=6.8kΩ, 20V, 600mA, 0.3W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			2SD1676	
DTC 363 EK		Si-N+R	=DTC 363E...: SMD	35a(2,9mm)	SOT-23		-	
DTC363T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=6.8kΩ, Rbe=, 30/15V, 600mA, 0.3W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			DTD 163T...	
DTC 363 TK		Si-N+R	=DTC 363T...: SMD	35a(2,9mm)	SOT-23		DTD 163TK	
DTD								
DTD113E(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=Rbe=1kΩ, 50V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 1221	
DTD 113 EK		Si-N+R	=DTD 113E...: SMD	35a(2,9mm)	SOT-23		-	
DTD113Z(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=1kΩ, Rbe=10kΩ, 50V, 500mA, 0.6W, 200MHz	9c, 41c			RN 1226	
DTD 113 ZK		Si-N+R	=DTD 113Z...: SMD	35a(2,9mm)	SOT-23		-	
DTD114E(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=Rbe=10kΩ, 50V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 1224, UN 4223, 2SC3916, 2SC 3920	
DTD 114 EK		Si-N+R	=DTD 114E...: SMD	35a(2,9mm)	SOT-23		UN 2223, 2SC3912	
DTD114G(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=, Rbe=10kΩ, 50/50V, 500mA, 0.6W, 200MHz	9c, 41c			-	
DTD 114 GK		Si-N+R	=DTD 114G...: SMD	35a(2,9mm)	SOT-23		-	
DTD114T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=10kΩ, Rbe=, 50/40V, 500mA, 0.6W, 200MHz	9c, 41c			DTC 314T...	
DTD 114 TK		Si-N+R	=DTD 114T...: SMD	35a(2,9mm)	SOT-23		DTC 314TK	
DTD122J(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=220Ω, Rbe=4.7kΩ, 50V, 500mA, 0.6W, 250MHz	9c, 41c			-	
DTD 122 JK		Si-N+R	=DTD 122J...: SMD	35a(2,9mm)	SOT-23		-	
DTD123E(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=Rbe=2.2kΩ, 50V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 1222, UN 4221, 2SC3919, 2SC 3923	
DTD 123 EK		Si-N+R	=DTD 123E...: SMD	35a(2,9mm)	SOT-23		UN 2221, 2SC3915	
DTD123T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=2.2kΩ, Rbe=, 50/40V, 500mA, 0.6W, 200MHz	9c, 41c			DTC 323T...	
DTD 123 TK		Si-N+R	=DTD 123T...: SMD	35a(2,9mm)	SOT-23		DTC 323TK	
DTD123Y(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=2.2k, Rbe=10kΩ, 50V, 500mA, 0.6W, 200MHz	9c, 41c			RN 1227, UN 4224, 2SC3918, 2SC3922	
DTD 123 YK		Si-N+R	=DTD 123Y...: SMD	35a(2,9mm)	SOT-23		UN 2224, 2SC3914	
DTD133H(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=3.3k, Rbe=10kΩ, 50V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			-	
DTD 133 HK		Si-N+R	=DTD 133H...: SMD	35a(2,9mm)	SOT-23		-	
DTD143E(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=Rbe=4.7kΩ, 50V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			RN 1223, UN 4222, 2SC3917, 2SC 3921	
DTD 143 EK		Si-N+R	=DTD 143E...: SMD	35a(2,9mm)	SOT-23		UN 2222, 2SC3913	
DTD143T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=4.7kΩ, Rbe=, 50/40V, 500mA, 0.6W, 200MHz	9c, 41c			DTC 343T...	
DTD 143 TK		Si-N+R	=DTD 143T...: SMD	35a(2,9mm)	SOT-23		DTC 343TK	
DTD163T(A.F.L.S.V)	Rhm	Si-N+R	S, Rb=6.8kΩ, Rbe=, 50/40V, 500mA, 0.6W, 200MHz A.F.L.V(ATR,FTR,FTL,ATV): Fig.9c, S(SPT): Fig.41c	9c, 41c			DTC 363T...	
DTD 163 TK		Si-N+R	=DTD 163T...: SMD	35a(2,9mm)	SOT-23		DTC 363TK	
DTE...DV								
DTE 16 E	Say	Triac	400V, 16A=(Tc=75°), Igt/Ih<80/=30mA	65I			MAC 515A-..., MAC 525A-...	
DTF 16 C...G	Say	Triac	200...600V, 16A=(Tc=78°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	65I			MAC 515(A)-..., MAC 525(A)-...	
DTI 2222	Itt	NMOS-IC	CTV, Color Processor	40-DIP			-	
DTI 2223	Itt	NMOS-IC	CTV, digital Color Processor	40-DIP	DTI 2223	40-DIP	-	
DTM 6 C...G(-N)	Say	Triac	200...600V, 6A=(Tc=70°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17I	SOT-186		TAG 420-..., (MAC 216-..., T 2500-...) ³	
DTM 8 C...G(-N)	Say	Triac	200...600V, 8A=(Tc=83°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17I	SOT-186		TAG425-..., TAG451-..., (T2800-..., T2850-...) ³	
DTM 10 C-N...G-N	Say	Triac	200...600V, 10A=(Tc=83°), Igt/Ih<50/<50mA C-N=200V, E-N=400V, G-N=600V	17I	SOT-186		TAG 456-..., TAG 457-..., (BTA 22-...) ³	
DTM 12 C...G(-N)	Say	Triac	200...600V, 12A=(Tc=73°), Igt/Ih<50/<50mA C=200V, E=400V, G=600V	17I	SOT-186		TAG480-..., TAG481-..., (BTA23-..., BT138-...) ³	
DTP		Si-N	=2SD2391-P (SMD-Marking)	39	SOT-89		+2SD2391	
DTQ		Si-N	=2SD2391-Q (SMD-Marking)	39	SOT-89		+2SD2391	
DTS 401	Del	Si-N	TV-VA, -/400V, 2A, 75W(Tc=75°)	23a	TO-3	BUW 11 A	18j	2SC1101, 2SC3151, 2SC3533
DTS 402	Del	Si-N	TV-HA, 700/400V, 3.5A, 100W(Tc=75°)	23a	TO-3	BUW 11 A	18j	BU 706, 2SC3484, 2SD1098, 2SD1495,++
DTS 403	Del	Si-N	S P, 400/400V, 3.5A, 100W(Tc=75°)	23a	TO-3	(BUW 11A)	18j	BUW 71, BUX 45, TIP 54, 2SC3083,++
DTS 409	Del	Si-N	S P, 400/400V, 3.5A, 100W(Tc=75°)	23a	TO-3	(BUW 11A)	18j	BUW 71, BUX 45, TIP 54, 2SC3083,++
DTS 410	Del	Si-N	S P, 200/200V, 3.5A, 100W(Tc=75°), 250/750ns	23a	TO-3	(BUW 11A)	18j	BUW 71, BUX 16(A...C), 2SC2908, 2SD1018++

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
DTS 411	Del	Si-N	S P, 300/300V, 3.5A, 100W(Tc=75°), 250/750ns	23a	TO-3	(BUW 11A)	18j	BUW 71, BUX 16A...C, TIP 52, 2SC4799,++
DTS 413	Del	Si-N	S P, /400V, 2A, 75W(Tc=75°), 250/750ns	23a	TO-3	(BUW 11A)	18j	BUX 46(A), BUX 82, 2SC3151, 2SC3533,++
DTV 32-1000A	Tho	Si-Di	CRT-HA, Damper-Di, 1000/1000V, 3A, <72ns	31a	DO-27A	(BYW 96 E)	31a	BYT 56M, (BYW 96E)
DTV 32-1200A	Tho	Si-Di	CRT-HA, Damper-Di, 1000/1200V, 6A(Tc=130°), <600ns	17k	TO-220	BY 329/1200	17k	BY 329/1200, BY 359/1500
DTV 32-1500A		Si-Di	=DTV 32-1200A: 1350/1500V	17k	TO-220	BY 359/1500	17k	BY 359/1500
DTV 32(F)-...B		Si-Di	=DTV 32(F)-...: <175ns	17k	TO-220			-
DTV 32F-...		Si-Di	=DTV 32-...: Iso	17d	TO-220 Iso			-
DTV 64-1200C	Tho	Si-Di	CRT-HA, Damper-Di, 1000/1200V, 6A(Tc=130°), <600ns	17k	TO-220			-
DTV 64F-1200C		Si-Di	=DTV 64-1200C: Iso	17d	TO-220 Iso			-
2.0...36...	Rhm	Z-Di	SMD, 2.0...36V, 0.2W	71(1,7mm)	SOD-323			HZU ... RD ...S
DU		GaAs-N-FET-d	=3SK241 (SMD-Marking)	44	SOT-143			-3SK241
DU		GaAs-N-FET-d	=3SK272 (SMD-Marking)	44(2mm)	SOT-343			-3SK272
DU		Si-P	=BCW 67RB (SMD-Marking)	35	SOT-23			-BCW 67RB
DU		Si-P	=HQ 1F2Q (SMD-Marking)	39	SOT-89			-HQ 1...
DV 1		Si-N	=2SD596-DV1 (SMD-Marking)	35	SOT-23			-2SD596
DV 2		Si-N	=2SD596-DV2 (SMD-Marking)	35	SOT-23			-2SD596
DV 3		Si-N	=2SD596-DV3 (SMD-Marking)	35	SOT-23			-2SD596
DV 4		Si-N	=2SD596-DV4 (SMD-Marking)	35	SOT-23			-2SD596
DV 5		Si-N	=2SD596-DV5 (SMD-Marking)	35	SOT-23			-2SD596
DV 07	Fui	Hybrid-IC	Kabeltreiber/Cable Driver					-
DV 08	Fui	Hybrid-IC	Kabeltreiber/Cable Driver					-
DV 24	Fui	Hybrid-IC	Hammertreiber/Hammer Driver					-
DVP		Si-N	=2SC4755-P (SMD-Marking)	35(2mm)	SOT-323			-2SC4755
DVP		Si-N	=2SC4782-P (SMD-Marking)	35	SOT-23			-2SC4782
DVQ		Si-N	=2SC4755-Q (SMD-Marking)	35(2mm)	SOT-323			-2SC4755
DVQ		Si-N	=2SC4782-Q (SMD-Marking)	35	SOT-23			-2SC4782
DVR		Si-N	=2SC4755-R (SMD-Marking)	35(2mm)	SOT-323			-2SC4755
DVR		Si-N	=2SC4782-R (SMD-Marking)	35	SOT-23			-2SC4782
DW								
DW		Si-P	=BCW 67RC (SMD-Marking)	35	SOT-23			-BCW 67RC
DW		Z-Di	=SM 6T 15 (SMD-Marking)	71a(6x4mm)	SOD-6			-SM 6T....
DW 1		Si-N	=2SD780-DW1 (SMD-Marking)	35	SOT-23			-2SD780
DW 2		Si-N	=2SD780-DW2 (SMD-Marking)	35	SOT-23			-2SD780
DW 3		Si-N	=2SD780-DW3 (SMD-Marking)	35	SOT-23			-2SD780
DW 4		Si-N	=2SD780-DW4 (SMD-Marking)	35	SOT-23			-2SD780
DW 5		Si-N	=2SD780-DW5 (SMD-Marking)	35	SOT-23			-2SD780
DW 542/....		Si-Di	=SKE 4F2/04			SKE 4F2/06	33a	-SKE 4F2/04
DW 6089		Si-P	=BC 154	8a	TO-106	BC 560	7a	-BC 154
DW 6170		Si-N	=BC 237	8a	TO-106	BC 546	7a	-BC 237
DW 6208		Si-N	=BC 237	8a	TO-106	BC 546	7a	-BC 237
DW 6335		Si-N	=BC 237	8a	TO-106	BC 546	7a	-BC 237
DW 6577		Si-N	=BF 199	8a	TO-106	BF 199	7d	-BF 199
DW 6618		Si-N	=BC 337	8a	TO-106	BC 337	7a	-BC 337
DW 6619		Si-P	=BC 327	8a	TO-106	BC 327	7a	-BC 327
DW 6737		Si-N	=BC 237	2a	TO-106	BC 546	7a	-BC 237
DW 6969		Si-P	=BC 307	2a	TO-106	BC 556	7a	-BC 307
DW 7000		Si-N	=BF 198	2a	TO-106	BF 198	7d	-BF 198
DW 7035		Si-N	=BC 237	8a	TO-106	BC 546	7a	-BC 237
DW 7039		Si-N	=BSX 24	2a	TO-105	BF 259	2a	-BSX 24
DW 7050		Si-N	=BF 199	8a	TO-106	BF 199	7d	-BF 199
DW 7975		Si-P	=BC 154	8a	TO-106	BC 560	7a	-BC 154
DX...DZ								
DX		Si-P	=BCW 68RF (SMD-Marking)	35	SOT-23			-BCW 68RF
DX		Si-P	=HQ 1A4A (SMD-Marking)	39	SOT-89			-HQ 1...
DX		Z-Di	=SM 6T 15A (SMD-Marking)	71a(6x4mm)	SOD-6			-SM 6T....
DX 0038 CE		Si-Di	=RGP 30M			BYW 96 E	31a	-RGP 30M
DX 0048 CE		Si-Di	=1N4148			1N4148	31a	-1N4148
DX 0055 CE		Si-Di	=RGP 30M			BYW 96 E	31a	-RGP 30M
DX 0073 CE		Si-Di	=BA 159			BA 159	31a	-BA 159
DX 0081 TA		Si-Di	=RGP 30A...M			RGP 30 M	31a	-RGP 30A...M
DX 0086 TA		Si-Di	=RGP 30G...M			RGP 30 M	31a	-RGP 30G...M
DX 0101 CE		Si-Di	=BA 157			BA 159	31a	-BA 157...159
DX 0107 TA		Si-Br	Br Rr	33		B380C5000	33	B380C2200, etc.
DX 0113 TA		Si-Di	=BA 176			BA 159	31a	-BA 176
DX 0115 CE		Si-Di	=RGP 30M			BYW 96 E	31a	-RGP 30M
DX 0117 TA		Si-Di	=RGP 30M			RGP 30 M	31a	-RGP 30M
DX 0118 CE		Si-Br	Br Rr	33		B40C3700	33	B40C3300, etc.
DX 0124 TA		Si-Di	=BY 255			BY 255	31a	-BY 255
DX 0125 CE		Si-Di	=RGP 30M			BYD 33 M	31a	-RGP 30M
DX 0128 CE		Si-Di	=RGP 30M	31a		BYW 96 E	31a	-RGP 30M
DY		Si-P	=2SA1201-Y (SMD-Marking)	39	SOT-89			-2SA1201
DY		Si-P	=2SA1620-Y (SMD-Marking)	35	SOT-23			-2SA1620
DY		Si-N	=2SC3397 (SMD-Marking)	35	SOT-23			-2SC3397
DY		Si-P	=BCW 68RG (SMD-Marking)	35	SOT-23			-BCW 68RG
DY		Si-P	=KTA1661-Y (SMD-Marking)	39	SOT-89			-KTA 1661
DZ....		Z-Di		31a		Z-Diode ...V	31a	
DZ		Si-P	=BCW 68RH (SMD-Marking)	35	SOT-23			-BCW 68RH
DZ		Si-N	=XN 4505 (SMD-Marking)	46	SOT-163			-XN 4505
DZB 6.2...30(C)	Say	Z-Di	6.2...30V, ±10%, C=±5%, 1W	31a	DO-15	Z-Diode ...V	31a	BZW 22/..., BZX 61/..., BZX 85/..., ZPY...,+
DZD 2.0...24(X,Y,Z)	Say	Z-Di	SMD, 2.0...24V, ±5%, X=-5...0%, Y=±2.5%, Z=0...+5%	35p	SOT-23			BZX 84/...
E								
E		Si-P	=2SA1688 (SMD-Marking)	35	SOT-23			-2SA1688
E 1		Si-P	=2SA1737 (SMD-Marking)	39	SOT-89			-2SA1737
E 1(p)		Si-N	=BFS 17 (SMD-Marking)	35	SOT-23			-BFS 17
E 1		Si-N	=BFS 17W (SMD-Marking)	35(2mm)	SOT-323			-BFS 17W
E 2		Si-P	=2SA1226-2 (SMD-Marking)	35	SOT-23			-2SA1226
E 2		Si-Di	=BAL 99 (SMD-Marking)	35	SOT-23			-BAL 99
E 2(p)		Si-N	=BFS 17A (SMD-Marking)	35	SOT-23			-BFS 17A
E 3		Si-Di	=1SS190 (SMD-Marking)	35	SOT-23			-1SS190

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
E 3		Si-P	=2SA1226-3 (SMD-Marking)	35	SOT-23		•2SA1226
E 3		Si-P	=2SA1256-3 (SMD-Marking)	35	SOT-23		•2SA1256
E 3		Si-Di	=BAR 99 (SMD-Marking)	35	SOT-23		•BAR 99
E 4		Si-P	=2SA1226-4 (SMD-Marking)	35	SOT-23		•2SA1226
E 4		Si-P	=2SA1256-4 (SMD-Marking)	35	SOT-23		•2SA1256
E 4		Si-N	=BFS 17R (SMD-Marking)	35	SOT-23		•BFS 17R
E 5		Si-P	=2SA1256-5 (SMD-Marking)	35	SOT-23		•2SA1256
E 5		Si-N	=BFS 17AR (SMD-Marking)	35	SOT-23		•BFS 17AR
E 6		Si-Di	=ZC 2800E (SMD-Marking)	35	SOT-23		•ZC 2800E
E 7		Si-Di	=ZC 2810E (SMD-Marking)	35	SOT-23		•ZC 2810E
E 8		Si-Di	=ZC 2811E (SMD-Marking)	35	SOT-23		•ZC 2811E
E 9		Si-Di	=ZC 5800E (SMD-Marking)	35	SOT-23		•ZC 5800E
E 15		Si-P	=BF 747 (SMD-Marking)	35	SOT-23		•BF 747
E 16		Si-N	=BF 547W: (SMD-Marking)	35(2mm)	SOT-323		•BF 547W
E 21		N-FET	=2SK932-21 (SMD-Marking)	35	SOT-23		•2SK932
E 22		N-FET	=2SK932-22 (SMD-Marking)	35	SOT-23		•2SK932
E 23		N-FET	=2SK932-23 (SMD-Marking)	35	SOT-23		•2SK932
E 24		N-FET	=2SK932-24 (SMD-Marking)	35	SOT-23		•2SK932
E 100 C,D	Hfo	TTL-Logic	=... 8400 (TTL)	14-DIC,DIP			... 8400... (TTL)
E 0100 AD	Tag	F-Thy	100V, 0.5A(Tc=40°C), 0.8A-, Igt/Ih=0,02/-5mA	2a	TO-18		-
E 0100 FD		F-Thy	=E 0100AD: 60V	2a	TO-18		-
E 0100 YD		F-Thy	=E 0100AD: 30V	2a	TO-18		-
E 0102 AA	Tag	F-Thy	100V, 0.5A(Tc=40°C), 0.8A-, Igt/Ih=0,2/5mA	7n	TO-92	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 FA		F-Thy	=E 0102AA: 60V	7n	TO-92	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 YA		F-Thy	=E 0102AA: 30V	7n	TO-92	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 AB	Tag	F-Thy	100V, 0.5A(Tc=40°C), 0.8A-, Igt/Ih=0,2/5mA	7a	SOT-30	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 FB		F-Thy	=E 0102AB: 60V	7a	SOT-30	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 YB		F-Thy	=E 0102AB: 30V	7a	SOT-30	BRX 49	7a BRX 46...47, BRX 51...52, TAG 62...
E 0102 AD	Tag	F-Thy	100V, 0.5A(Tc=40°C), 0.8A-, Igt/Ih=0,2/5mA	2a	TO-18	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 FD		F-Thy	=E 0102AD: 60V	2a	TO-18	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 YD		F-Thy	=E 0102AD: 30V	2a	TO-18	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 AG	Tag	F-Thy	100V, 0.65A(Tc=85°C), 1A-, Igt/Ih=0,2/5mA	2a	TO-39	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 FG		F-Thy	=E 0102AG: 60V	2a	TO-39	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 YG(9004)		F-Thy	=E 0102AG: 30V	2a	TO-39	TAG 103 X	2a BRX 46...47, BRX 51...52, TAG 62...
E 0102 YB	Tag	F-Thy	=BR 103	7a	SOT-30	BRX 49	7a •BR 103
E 103 C,D	Hfo	TTL-Logic	=... 8403 (TTL)	14-DIC,DIP			... 8403... (TTL)
E 104 C,D	Hfo	TTL-Logic	=... 8404 (TTL)	14-DIC,DIP			... 8404... (TTL)
E 108 C,D	Hfo	TTL-Logic	=... 8408 (TTL)	14-DIC,DIP			... 8408... (TTL)
E 110 C,D	Hfo	TTL-Logic	=... 8410 (TTL)	14-DIC,DIP			... 8410... (TTL)
E 120 C,D	Hfo	TTL-Logic	=... 8420 (TTL)	14-DIC,DIP			... 8420... (TTL)
E 121 C,D	Hfo	TTL-Logic	=... 84121 (TTL)	14-DIC,DIP			... 84121... (TTL)
E 126 C,D	Hfo	TTL-Logic	=... 8426 (TTL)	14-DIC,DIP			... 8426... (TTL)
E 130 C,D	Hfo	TTL-Logic	=... 8430 (TTL)	14-DIC,DIP			... 8430... (TTL)
E 140 C,D	Hfo	TTL-Logic	=... 8440 (TTL)	14-DIC,DIP			... 8440... (TTL)
E 146 C,D	Hfo	TTL-Logic	=... 8446 (TTL)	16-DIC,DIP			... 8446... (TTL)
E 147 C,D	Hfo	TTL-Logic	=... 8447 (TTL)	16-DIC,DIP			... 8447... (TTL)
E 150 C,D	Hfo	TTL-Logic	=... 8450 (TTL)	14-DIC,DIP			... 8450... (TTL)
E 151 C,D	Hfo	TTL-Logic	=... 8451 (TTL)	14-DIC,DIP			... 8451... (TTL)
E 153 C,D	Hfo	TTL-Logic	=... 8453 (TTL)	14-DIC,DIP			... 8453... (TTL)
E 154 C,D	Hfo	TTL-Logic	=... 8454 (TTL)	14-DIC,DIP			... 8454... (TTL)
E 160 C,D	Hfo	TTL-Logic	=... 8460 (TTL)	14-DIC,DIP			... 8460... (TTL)
E 172 C,D	Hfo	TTL-Logic	=... 8472 (TTL)	14-DIC,DIP			... 8472... (TTL)
E 174 C,D	Hfo	TTL-Logic	=... 8474 (TTL)	14-DIC,DIP			... 8474... (TTL)
E 175 C,D	Hfo	TTL-Logic	=... 8475 (TTL)	16-DIC,DIP			... 8475... (TTL)
E 181 C,D	Hfo	TTL-Logic	=... 8481 (TTL)	14-DIC,DIP			... 8481... (TTL)
E 191 C,D	Hfo	TTL-Logic	=... 8491 (TTL)	14-DIC,DIP			... 8491... (TTL)
E 192 C,D	Hfo	TTL-Logic	=... 84192 (TTL)	16-DIC,DIP			... 84192... (TTL)
E 193 C,D	Hfo	TTL-Logic	=... 84193 (TTL)	16-DIC,DIP			... 84193... (TTL)
E 195 C,D	Hfo	TTL-Logic	=... 8495 (TTL)	14-DIC,DIP			... 8495... (TTL)
E 204 C,D	Hfo	TTL-Logic	=... 84H04 (TTL)	14-DIC,DIP			... 84H04... (TTL)
E 274 D	Hfo	TTL-Logic	=... 84H74 (TTL)	14-DIP			... 84H74... (TTL)
E 300	Nsc,Six	N-FET	HF, 25V, Idss=6...30mA, Up=1...6V	8b	TO-106	(BF 245)	7f BF 256B...C, BF 348, BFT 10A, 2N5397
E 304	Nsc,Six	N-FET	VHF, 30V, Idss=5...15mA, Up=2...6V	8b	TO-106		BFS 80, BF 11, 2N4416, 2N5245
E 305	Nsc,Six	N-FET	=E 304: Idss=1...8mA, Up=0,5...3V	8b	TO-106		2N5457, 2SK246, 2SK330
E 308	Nsc	N-FET	VHF, 25V, Idss=12...60mA, Up=1...6,5V	8b	TO-106		BFT 10B...C, 2SK125
E 309	Nsc	N-FET	=E 308: Idss=12...30mA, Up=1...4V	8b	TO-106		-
E 310	Nsc	N-FET	=E 308: Idss=24...60mA, Up=2...6,5V	8b	TO-106		BFT 10C, 2SK125
E 310 D	Hfo	LIN-IC	Kfz-Blinkgeber/Car Blinking Generator	16-DIP			-
E 311	Nsc	N-FET	=E 308: Idss<30mA, Up<4V	8b	TO-106		-
E 312	Nsc	N-FET	=E 308: Idss<60mA, Up<6,5V	8b	TO-106		BFT 10C, 2SK125
E 345 D	Hfo	TTL-Logic	=D 345D: -25...+85°	16-DIP			-
E 346 D	Hfo	TTL-Logic	=D 346D: -25...+85°	16-DIP			-
E 347 D	Hfo	TTL-Logic	=D 347D: -25...+85°	16-DIP			84LS247 (TTL)
E 348 D	Hfo	TTL-Logic	=D 348D: -25...+85°	16-DIP			84LS247 (TTL)
E 351 D	Hfo	TTL-Logic	=D 351D: -25...+85°	14-DIP			-
E 355 D	Hfo	TTL-Logic	=D 355D: -25...+85°	18-DIP			-
E 356 D	Hfo	TTL-Logic	=D 356D: -25...+85°	18-DIP			-
E 412 D	Hfo	LIN-IC	3x AND-Gate, Treiber/Driver, Tri-State Out	18-DIP			-
E 435 E	Hfo	LIN-IC	Leistungstreiber/Power Driver				(FZL 135S)
E 1007	Aeg	LIN-IC	=TEA 1007	8-DIP			•TEA 1007
E 1156/1201		MOS-IC	Analogarmbanduhr/Analogic Watch	Chip			U 117(X)
E 1617		Si-N	=BD 115	2a	TO-39	BF 259	2a •BD 115
E 1694		Si-P	=BC 143	2a		BC 161	2a •BC 143
E 5429		UJT		7d	TO-92		BSV 57B
E 5565		N-FET	=MPF 111	7e	TO-92	BF 245	7f •MPF 111
E 6008		Si-P	=BC 154			BC 560	7a •BC 154
E 7133		Si-P	=BF 506			BF 324	7a •BF 506
E 7134		Si-P	=BF 969			BF 979(S)	24e •BF 969
E 7140		MOS-N-FET-d	=BF 960	25g		BF 960	25g •BF 960
E 7142		Si-P	=BF 506				•BF 506
E 7150		Si-P	=BF 970			BF 979(S)	24e •BF 970
E 7359		MOS-N-FET-d	=BF 966	25g		BF 960	25g •BF 966
E 7606		Ge-Di	=2x AA 119			2x AA 119	31a •AA 119

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
E:		Si-P	=2SA1688 (SMD-Marking)	35	SOT-23		-2SA1688	
EA....EC								
EA		Si-P/N	=µPA504T (SMD-Marking)	45	SOT-153		-µPA504T	
EA		Si-P/N	=µPA574T (SMD-Marking)	45(2mm)	SOT-353		-µPA574T	
EA		Si-P	=2SA1022-A (SMD-Marking)	35	SOT-23		-2SA1022	
EA		Si-P	=2SA1532-A (SMD-Marking)	35(2mm)	SOT-323		-2SA1532	
EA		Si-P	=2SA1790-A (SMD-Marking)	35(1,6mm)	SS Mini		-2SA1790	
EA		Si-N	=2SD1420-EA (SMD-Marking)	39	SOT-89		-2SD1420	
EA(s)		Si-N	=BCW 65A (SMD-Marking)	35	SOT-23		-BCW 65A	
EA		Si-N	=HC 2A4A (SMD-Marking)	39	SOT-89		-HC 2...	
EA 961		Si-P	=2SB681	23a	TO-3	2SA1294	18j	-2SB681
EA 7316	Tos	MOS-IC	Digitaluhr/Digital Clock					
EA 7317 B	Tos	MOS-IC	Digitaluhr/Digital Clock & Datum/Date					
EB		Si-P	=2SA1022-B (SMD-Marking)	35	SOT-23		-2SA1022	
EB		Si-P	=2SA1532-B (SMD-Marking)	35(2mm)	SOT-323		-2SA1532	
EB		Si-P	=2SA1790-B (SMD-Marking)	35(1,6mm)	SS Mini		-2SA1790	
EB		Si-P	=2SA1888-B (SMD-Marking)	=35	(T Mini)		-2SA1888	
EB		Si-N	=2SD1420-EB (SMD-Marking)	39	SOT-89		-2SD1420	
EB(s)		Si-N	=BCW 65B (SMD-Marking)	35	SOT-23		-BCW 65B	
EB P		N-FET	=2SK1842-P: (SMD-Marking)	35	SOT-23		-2SK1842	
EB Q		N-FET	=2SK1842-Q: (SMD-Marking)	35	SOT-23		-2SK1842	
EB R		N-FET	=2SK1842-R: (SMD-Marking)	35	SOT-23		-2SK1842	
EB S		N-FET	=2SK1842-S: (SMD-Marking)	35	SOT-23		-2SK1842	
EC		Si-P	=2SA1022-C (SMD-Marking)	35	SOT-23		-2SA1022	
EC		Si-P	=2SA1368-C (SMD-Marking)	39	SOT-89		-2SA1368	
EC		Si-P	=2SA1532-C (SMD-Marking)	35(2mm)	SOT-323		-2SA1532	
EC		Si-P	=2SA1790-C (SMD-Marking)	35(1,6mm)	SS Mini		-2SA1790	
EC		Si-P	=2SA1888-C (SMD-Marking)	=35	(T Mini)		-2SA1888	
EC		Si-N	=2SC2732 (SMD-Marking)	35	SOT-23		-2SC2732	
EC		Si-N	=2SC4462 (SMD-Marking)	35(2mm)	SOT-323		-2SC4422	
EC		Si-N	=2SD1420-EC (SMD-Marking)	39	SOT-89		-2SD1420	
EC		MOS-N-FET-d	=3SK247 (SMD-Marking)	44	SOT-143		-3SK247	
EC(s)		Si-N	=BCW 65C (SMD-Marking)	35	SOT-23		-BCW 65C	
EC 961		Si-N	=2SD551	23a	TO-3	2SC3263	18j	-2SD551
ECO 0100...9999	Ntn	Si-Di, Z-Di	=0100...9999			-0100...9999		
ED								
ED		Si-P	=2SA1368-D (SMD-Marking)	39	SOT-89		-2SA1368	
ED		Si-N	=2SD1421-ED (SMD-Marking)	39	SOT-89		-2SD1421	
ED		Si-P	=BCV 28 (SMD-Marking)	39	SOT-89		-BCV 28	
ED		Z-Di	=SM 6T 18 (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T....	
ED		Si-N/P	=XP 4654 (SMD-Marking)	46(2mm)	SOT-363		-XP 4654	
ED 592		Si-N	=BF 254	7d	TO-92	BF 255	7d	-BF 254
ED 1401(A...E)	Nsc	Si-N	=TED 1402	7e	TO-92	=ED 1402		-TED 1402
ED 1402(A...E)	Nsc	Si-N	=TED 1402	7e	TO-92	=TED 1402		-TED 1402
ED 1501(A...E)	Nsc	Si-N	=TED 1502	7e	TO-92	=TED 1502		-TED 1502
ED 1502(A...E)	Nsc	Si-N	=TED 1502	7e	TO-92	=TED 1502		-TED 1502
ED 1601(A...E)	Nsc	Si-P	=TED 1602	7e	TO-92	=TED 1602		-TED 1602
ED 1602(A...E)	Nsc	Si-P	=TED 1602	7e	TO-92	=TED 1602		-TED 1602
ED 1701(K...N)	Nsc	Si-N	=TED 1702	7e	TO-92	=TED 1702		-TED 1702
ED 1702(K...N)	Nsc	Si-N	=TED 1702	7e	TO-92	=TED 1702		-TED 1702
ED 1801(K...N)	Nsc	Si-P	=TED 1802	7e	TO-92	=TED 1802		-TED 1802
ED 1802(K...N)	Nsc	Si-P	=TED 1802	7e	TO-92	=TED 1802		-TED 1802
ED 2502		Si-N	=BF 255	7a	TO-92	BF 255	7d	-BF 255
ED 8050		Si-N	=SS 8050	IED8550	7e	TO-92	=SS 8050	-SS 8050
ED 8550		Si-P	=SS 8550	IED8050	7e	TO-92	=SS 8550	-SS 8550
EE		Si-P	=2SA1368-E (SMD-Marking)	39	SOT-89		-2SA1368	
EE		Si-N	=2SD1421-EE (SMD-Marking)	39	SOT-89		-2SD1421	
EE		Si-P	=BCV 48 (SMD-Marking)	39	SOT-89		-BCV 48	
EE		Z-Di	=SM 6T 18A (SMD-Marking)	71a(6x4mm)	SOD-6		-SM 6T....	
EF								
EF		Si-N	=BCV 29 (SMD-Marking)	39	SOT-89		-BCV 29	
EF(s)		Si-N	=BCW 66F (SMD-Marking)	35	SOT-23		-BCW 66F	
EF 68HC...	Tho	µC-IC	µComp, Serie 6800...					
EF 4440	Tho	NMOS-IC	µComp, Peripherie Interface (ARINC)	28-DIP				
EF 4442	Tho	NMOS-IC	µComp, Peripherie(ARINC) f.6800,6802µC	28-DIP				
EF 4443 DP	Tho	NMOS-IC	Drehzahlregler/Motor Speed Control	16-DIP				
EF 6800...6854	Tho	µC-IC	µComp, Serie 6800..., Peripherie etc.					
EF 6843	Tho	I/O-IC	Floppy Disk Controller	40-DIP				
EF 6844	Tho	I/O-IC	DMA Controller, 1MByte/s, 4 Channel	40-DIP				
EF 6845	Tho	I/O-IC	CRT Controller, 1MByte/s, 4 Channel	40-DIP				
EF 6846(C1)	Tho	MOS-IC	Combo Chip, 2k ROM, Timer	40-DIP				
EF 6862	Tho	I/O-IC	Digital Modulator, ser., 1200/2400bps	24-DIP				
EF 7331	Tho	NMOS-IC	Telecom, Zeitmatrix, Register etc.	28-DIP				
EF 7332	Tho	NMOS-IC	Telecom, Taktgenerierung/Clock Generator, 2,048MHz	16-DIP				
EF 7333	Tho	NMOS-IC	Telecom, Communication, 2,048MHz	24-DIP				
EF 7442	Tho	NMOS-IC	Telecom, Zeitbasis/Time Base, Multiplexer	16-DIP				
EF 7445	Tho	NMOS-IC	Telecom, Encoder/Decoder Controller	24-DIP				
EF 7910	Tho	NMOS-IC	Telecom, Modem, AMD 7910 kompatibel/compatible	28-DIP				
EF 8307	Tho	A/D-IC	Telecom, A/D Converter, 7 Bit, 20MHz	24-DIP				
EF 8308	Tho	A/D-IC	Telecom, A/D Converter, 8 Bit, 20MHz	24-DIP				
EF 8408	Tho	D/A-IC	Telecom, A/D Converter, 8 Bit, 20MHz	16-DIP				
EF 9241	Tho	NMOS-IC	Demultiplexer (CEEFAX, DIDON, ANTIOPE)	40-DIP				
EF 9340	Tho	MOS-IC	Semigraphic Display Processor	40-DIP				
EF 9341	Tho	MOS-IC	Zeichengenerator/Character Generator	40-DIP				
EF 9345 FN	Tho	MOS-IC	=EF 9345P:	44-PLCC				
EF 9345 P	Tho	HMOS-IC	Semigraphic Display Processor	40-DIP				
EF 9364 A	Tho	I/O-IC	Video Controller, 50Hz/625 Zeilen/Lines	24-DIP				
EF 9364 B	Tho	I/O-IC	=EF 9364A: 60Hz/525 Zeilen/Lines	24-DIP				
EF 9365	Tho	MOS-IC	Graphic Display Processor	40-DIP				
EF 9366	Tho	MOS-IC	Graphic Display Processor	40-DIP				

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
EF 9367 P, P3	Tho	MOS-IC	Graphic Display Processor				-
EF 9368	Tho	MOS-IC	Graphic Display Processor				-
EF 9369 FN	Tho	MOS-IC	=EF 9369P:				-
EF 9369 P	Tho	MOS-IC	Color Palette Decoder				-
EF 68000...68901	Tho	µC-IC	µComp, Serie 6800... Peripherie etc.				-
EF 84108	Tho	D/A-IC	Telecom, A/D Converter, 8 Bit, 5MHz				-
EFB 4443	Tho	NMOS-IC	Drehzahlregler/Motor Speed Control				-
EFB 7189	Tho	CMOS-IC	Telecom, Frequ.-Generator, µComp, Interface				-
EFB 7303	Tho	CMOS-IC	Telecom, ser./par. Converter, 8/8 Bit				-
EFB 7310	Tho	CMOS-IC	Telecom, 4x4x1 Matrix f. analog Signal				-
EFB 7334	Tho	CMOS-IC	Telecom, Demultiplexer f. 8x EF7331, EF7333				-
EFB 7335	Tho	CMOS-IC	Telecom, 1 Kanal/Channel Signalling Controller				-
EFB 7336	Tho	CMOS-IC	Telecom, 8-Kanal/Channel Controller				-
EFB 7356	Tho	CMOS-IC	Telecom, 1 Kanal/Channel Codec				-
EFB 7360	Tho	CMOS-IC	Telecom, 1 Kanal/Channel Codec, Filter				-
EFB 7441	Tho	CMOS-IC	Telecom, Zeitbasis/Time Base, Multiplexer				-
EFB 7443	Tho	CMOS-IC	Telecom, Encoder, TMS 3863 kompatibel/compatible				-
EFB 7444	Tho	CMOS-IC	Telecom, Decoder, A-Law				-
EFB 7446	Tho	CMOS-IC	Telecom, Binary → HDB3 Transcoder				-
EFB 7447	Tho	CMOS-IC	Telecom, 1/16-Multiplexer				-
EFB 7510	Tho	CMOS-IC	Telecom, FSK-Modem, 75/1200Baud, V.23				-
EFB 7512	Tho	CMOS-IC	Telecom, FSK-Modem, 75/1200Baud, V.23				-
EFB 7513	Tho	CMOS-IC	Telecom, FSK-Modem, 75/1200Baud, V.23				-
EFB 7910	Tho	NMOS-IC	Telecom, FSK-Modem, CCITT, Bell				-
EFB 7912	Tho	CMOS-IC	Telecom, Filter f. 1 Kanal/Channel Codec				-
EFB 8305 A	Tho	CMOS-IC	Telecom, Programm. Timer				-
EFB 9151	Tho	CMOS-IC	Telecom, Tastwahl/Key Dialing				-
EFB 9158	Tho	CMOS-IC	Telecom, Tastwahl/Key Dialing				-
EFD 108		Ge-Di	=SFD 108		AA 133	31a	=SFD 108
EFD 7130	Tho	PMOS-IC	Telecom, Telefonnummernbeschränkung, Number Limit.				-
EFG ...0	Tho	CMOS-IC	Gate-Arrays, kundenspezifisch/customized				-
EFG 850 XY	Tho	CMOS-IC	Telecom, Switched Capacitor Filter				-
EFG 7189(PD)	Tho	CMOS-IC	Telecom, DTMF, ser. Interface				-
EFG 7515	Tho	CMOS-IC	Telecom, DPSK-Modem, V.22, Bell 212A				-
EFG 71891(PD)	Tho	CMOS-IC	Telecom, DTMF, par. Interface				-
EFV 1		Si-Di	=BY 228		BY 228	31a	=BY 228
EFZ	Tho	ECL/TTL-IC	Gate-Arrays, kundenspezifisch/customized				-
EG...EK							
EG		Si-N	=BCV 49 (SMD-Marking)	39	SOT-89		=BCV 49
EG(s)		Si-N	=BCW 66G (SMD-Marking)	35	SOT-23		=BCW 66G
EG 01	Sak	Si-Di	FRr, 400V, 0,7A, Uf<2V(0,7A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36B...E, RGP 10G...M,++
EG 01 A	Sak	Si-Di	FRr, 600V, 0,5A, Uf<2V(0,5A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26C...E, BYV 36C...E, RGP 10J...M,++
EG 01 C	Sak	Si-Di	FRr, 1000V, 0,5A, Uf<3,3V(0,5A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26E, BYV 36E, BYT 52M, RGP 10M,++
EG 01 Y	Sak	Si-Di	FRr, 70V, 1A, Uf<1,2V(1A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36A...E, RGP 10A...M,++
EG 01 Z	Sak	Si-Di	FRr, 200V, 0,7A, Uf<1,9V(0,7A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36A...E, RGP 10D...M,++
EG 1	Sak	Si-Di	FRr, 400V, 0,8A, Uf<1,2V(0,8A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36B...E, RGP 10G...M,++
EG 1 A	Sak	Si-Di	FRr, 600V, 0,6A, Uf<2V(0,6A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26C...E, BYV 36C...E, RGP 10J...M,++
EG 1 Y	Sak	Si-Di	FRr, 70V, 1,1A, Uf<1,2V(1,1A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36A...E, RGP 10A...M,++
EG 1 Z	Sak	Si-Di	FRr, 200V, 0,8A, Uf<1,7V(0,8A), 100ns	31a	SOD-22	BYD 33 M 31a	BYV 26B...E, BYV 36A...E, RGP 10D...M,++
EGL 27 A...G	Gie	Si-Di	=BYM 32/....				=BYM 32/...
EGL 34 A...G	Gie	Si-Di	=BYM 07/....				=BYM 07/...
EGL 41 A...G	Gie	Si-Di	=BYM 12/....				=BYM 12/...
EGP 10 A...G	Gie	Si-Di	FRr, 50...400V, 1A, Uf<0,95V(1A), <50ns A=50, B=100, C=150, D=200, F=300, G=400V	31a	DO-41	BYV 27/200 f. EGP 10A...D	31a BYV 26B...E, FE 1A...D
EGP 20 A...G	Gie	Si-Di	FRr, 50...400V, 2A, Uf<0,95V(2A), <50ns A=50, B=100, C=150, D=200, F=300, G=400V	31a	DO-15	BYV 27/200 f. EGP 20A...D	31a BYD 74A...G, BYV 27/..., FE 2A...D
EGP 30 A...G	Gie	Si-Di	FRr, 50...400V, 3A, Uf<0,95V(3A), <50ns A=50, B=100, C=150, D=200, F=300, G=400V	31a	DO-27A	BYV 28/200 f. EGP 30A...D	31a BYV 28/..., FE 3A...D
EGP 50 A...G	Gie	Si-Di	FRr, 50...400V, 5A, Uf<0,95V(5A), <50ns A=50, B=100, C=150, D=200, F=300, G=400V	31a	DO-27A		31a BYV 61...63, FE 5A...D, FE 6A...D
EH		Si-P	=2SB1027-EH (SMD-Marking)	39	SOT-89		=2SB1027
EH(s)		Si-N	=BCW 66H (SMD-Marking)	35	SOT-23		=BCW 66H
EH		Z-Di	=SM 6T 22 (SMD-Marking)	71a(6x4mm)	SOD-6		=SM 6T....
EH 1(A,Z)	Sak	Si-Di	Rr, 200...600V, 0,6A, Uf<1,35V(0,6A), 4µs EH 1=400V, A=600V, Z=200V	31a	SOD-22	1N4007 31a	BY 126...127, BY 133...134, 1N4003...07,++
EHD-RD 3053 N,NA	Mat	Hybrid-Z-IC	-5V, 1A				-
EHD-RD 3053 PA	Mat	Hybrid-Z-IC	+5V, 1A				-
EHD-RD 3053 R,RA	Mat	Hybrid-Z-IC	+5V, 1A				-
EHD-RD 3053 S	Mat	Hybrid-Z-IC	+5V, 1A				-
EHD-RD 3053 V	Mat	Hybrid-Z-IC	+5V, 3A				-
EHD-RD 3093 PA	Mat	Hybrid-Z-IC	+9V, 1A				-
EHD-RD 3093 R,RA	Mat	Hybrid-Z-IC	+9V, 1A				-
EHD-RD 3093 S	Mat	Hybrid-Z-IC	+9V, 1A				-
EHD-RD 3123 N,NA	Mat	Hybrid-Z-IC	-12V, 1A				-
EHD-RD 3123 PA	Mat	Hybrid-Z-IC	+12V, 1A				-
EHD-RD 3123 R,RA	Mat	Hybrid-Z-IC	+12V, 1A				-
EHD-RD 3123 S	Mat	Hybrid-Z-IC	+12V, 1A				-
EHD-RD 3123 V	Mat	Hybrid-Z-IC	+12V, 3A				-
EHD-RD 3153 N,NA	Mat	Hybrid-Z-IC	-15V, 1A				-
EHD-RD 3153 PA	Mat	Hybrid-Z-IC	+15V, 1A				-
EHD-RD 3153 R,RA	Mat	Hybrid-Z-IC	+15V, 1A				-
EHD-RD 3153 S	Mat	Hybrid-Z-IC	+15V, 1A				-
EHD-RD 3183 PA	Mat	Hybrid-Z-IC	+18V, 1A				-
EHD-RD 3183 R,RA	Mat	Hybrid-Z-IC	+18V, 1A				-
EHD-RD 3183 S	Mat	Hybrid-Z-IC	+18V, 1A				-
EHD-RD 3243 N,NA	Mat	Hybrid-Z-IC	-24V, 1A				-
EHD-RD 3243 PA	Mat	Hybrid-Z-IC	+24V, 1A				-
EHD-RD 3243 R,RA	Mat	Hybrid-Z-IC	+24V, 1A				-
EHD-RD 3243 S	Mat	Hybrid-Z-IC	+24V, 1A				-
EI		MOS-N-FET-d	=3SK182 (SMD-Marking)	44	SOT-143		=3SK182
EI		Si-P+R	=UN 211M (SMD-Marking)	35	SOT-23		=UN 211M
EI		Si-P+R	=UN 511M (SMD-Marking)	35(2mm)	SOT-323		=UN 511M

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
EJ		Si-P	=2SB1027-EJ (SMD-Marking)	39	SOT-89		*2SB1027	
EJ 4		N-FET	=3SK181-4 (SMD-Marking)	44	SOT-143		*3SK181	
EJ 5		N-FET	=3SK181-5 (SMD-Marking)	44	SOT-143		*3SK181	
EJ 6		N-FET	=3SK181-6 (SMD-Marking)	44	SOT-143		*3SK181	
EJ 5027		Si-N	=2N3055	23a	TO-3	2N3055	*2N3055	
EK		Si-P	=2SB1027-EK (SMD-Marking)	39	SOT-89		*2SB1027	
EK		Si-N	=2SD1001-EK (SMD-Marking)	39	SOT-89		*2SD1001	
EK(s)		Si-N	=BCX 41 (SMD-Marking)	35	SOT-23		*BCX 41	
EK		Z-Di	=SM 6T 22A (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....	
EK		Si-P+R	=XN 111M (SMD-Marking)	45	SOT-153		*XN 111M	
EK 03	Sak	Si-Di	Schottky FRr, 30V, 1A, Uf<0.55V(1.5A), 200ns	31a	SOD-22	1N5822	31a	BYV 10-30, SB 130...160, 1N5818...19
EK 04	Sak	Si-Di	Schottky FRr, 40V, 1A, Uf<0.55V(1.5A), 200ns	31a	SOD-22	1N5822	31a	BYS 21-45, BYV 10-40, SB140...160, 1N5819
EK 06	Sak	Si-Di	Schottky FRr, 60V, 0.7A, Uf<0.62V(0.7A), 100ns	31a	SOD-22			BYS 21-90, BYV 10-60, SB 160, MBR 160
EK 09	Sak	Si-Di	Schottky FRr, 90V, 0.7A, Uf<0.81V(0.7A), 100ns	31a	SOD-22			BYS 21-90, HRP 32
EK 13	Sak	Si-Di	Schottky, FRr, 30V, 1.5A, Uf<0.55V(2A), 200ns	31a	SOD-22	1N5822	31a	BYS 22-45, BYS 26-45, 1N5821...22
EK 14	Sak	Si-Di	Schottky, FRr, 40V, 1.5A, Uf<0.55V(2A), 200ns	31a	SOD-22	1N5822	31a	BYS 22-45, BYS 26-45, 1N5822
EK 16	Sak	Si-Di	Schottky, FRr, 60V, 1.5A, Uf<0.62V(1.5A), 100ns	31a	SOD-22			BYS 22-90, BYS 26-90, HRP 34, MBR 360
EK 19	Sak	Si-Di	Schottky, FRr, 90V, 1.5A, Uf<0.81V(1.5A), 100ns	31a	SOD-22			BYS 22-90, BYS 26-90
EL								
EL		Si-P	=2SA1344 (SMD-Marking)	35	SOT-23		*2SA1344	
EL		Si-P	=2SA1678 (SMD-Marking)	35(2mm)	SOT-323		*2SA1678	
EL		Si-P	=2SB1028-EL (SMD-Marking)	39	SOT-89		*2SB1028	
EL		Si-N	=2SD1001-EL (SMD-Marking)	39	SOT-89		*2SD1001	
EL		Z-Di	=SM 6T 24 (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....	
EL		Si-N+R	=UN 221M (SMD-Marking)	35	SOT-23		*UN 221M	
EL		Si-N+R	=UN 521M (SMD-Marking)	35(2mm)	SOT-323		*UN 521M	
EL 1 Z	Sak	Si-Di	FRr, 200V, 1.5A, Uf<0.98V(1.5A), 50ns	31a	SOD-22	BYV 27/200	31a	BYD 73D...G, EGP 100, FE 1D
EL 133		N-FET	=BF 245	7f	TO-92	BF 245	7f	*BF 245
EL 220/7128		Si-N	=2N3856			BC 546	7a	*2N3856
EL 692		Si-P	=BC 393			MPS-U60	13m	*BC 393
EM								
EM		Si-P	=2SB1028-EM (SMD-Marking)	39	SOT-89		*2SB1028	
EM		Si-N	=2SD1001-EM (SMD-Marking)	39	SOT-89		*2SD1001	
EM		Z-Di	=SM 6T 24A (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....	
EM		Si-N+R	=XN 121M (SMD-Marking)	45	SOT-153		*XN 121M	
EM 01(A,Y,Z)	Sak	Si-Di	Rr, 100...600V, 1A, Uf<0.97V(1A) EM 01=400V, A=600V, Y=100V, Z=200V	31a	SOD-22	1N4007	31a	BY 126...127, BY 133...134, 1N4002...07,++
EM 1(A,B,C,Y,Z)	Sak	Si-Di	Rr, 100...1000V, 1A, Uf<0.97V(1A) EM 1=400V, A=600V, B=800V, C=1000V, Y=100V, Z=200V	31a	SOD-22	1N4007	31a	BY 126...127, BY 133...134, 1N4002...07,++
EM 2(A,B)	Sak	Si-Di	Rr, 400...800V, 1.2A, Uf<0.92V(1.2A) EM 2=400V, A=600V, B=800V	31a	SOD-22	BYD 33 M	31a	BY 226...227, BYW 53...56, GP 15G...M,++
EM 502	Itt	Si-Di	=1N4003	31a	DO-15	1N4007	31a	*1N4003
EM 504	Itt	Si-Di	=1N4004	31a	DO-15	1N4007	31a	*1N4004
EM 506	Itt	Si-Di	=1N4005	31a	DO-15	1N4007	31a	*1N4005
EM 508	Itt	Si-Di	=1N4006	31a	DO-15	1N4007	31a	*1N4006
EM 510	Itt	Si-Di	=1N4007	31a	DO-15	1N4007	31a	*1N4007
EM 513	Itt,Tho	Si-Di	=1N4007: Itt: 1300V, Tho: 1600V	31a	DO-15	BY 228	31a	BY 228, BY 231/1500, DM 513, GP 10Y
EM 516	Itt	Si-Di	=1N4007: Itt: 1600V, Tho: 1800V	31a	DO-15	(BY 228) ⁷	31a	RGF 15-18, (BY 228, DM 516, GP 10Y) ⁷
EN								
EN		Z-Di	=SM 6T 27 (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....	
EN		Si-N	=XN 4506 (SMD-Marking)	46	SOT-163		*XN 4506	
EN 697	Fch,Nsc	Si-N	=2N697: 0.3W	8a	TO-106		*2N697	
EN 706	Fch	Si-N	=2N706: 0.2W	8a	TO-106		*2N706	
EN 708	Fch	Si-N	=2N708: 0.2W	8a	TO-106		*2N708	
EN 718 A	Fch	Si-N	=2N718A: 0.22W	8a	TO-106		*2N718 A	
EN 722	Fch,Nsc	Si-P	=2N722: 0.2W	8a	TO-106		*2N722	
EN 744	Fch	Si-N	=2N744: 0.2W	8a	TO-106		*2N744	
EN 870	Fch	Si-N	=2N870: 0.22W	8a	TO-106		*2N870	
EN 871	Fch	Si-N	=2N871: 0.22W	8a	TO-106		*2N871	
EN 914	Fch	Si-N	=2N914: 0.2W	8a	TO-106		*2N914	
EN 915	Fch	Si-N	=2N915: 0.2W	8a	TO-106		*2N915	
EN 916	Fch	Si-N	=2N916: 0.2W	8a	TO-106		*2N916	
EN 918	Fch,Nsc	Si-N	=2N918: 0.2W	8a	TO-106		*2N918	
EN 930	Fch,Nsc,Mic	Si-N	=2N930: 0.2W	8a	TO-106		*2N930	
EN 956	Fch,Nsc	Si-N	=2N956: 0.22W	8a	TO-106		*2N956	
EN 1132	Fch,Nsc	Si-P	=2N1132: 0.3W	8a	TO-105		*2N1132	
EN 1613	Fch	Si-N	=2N1613: 0.3W	8a	TO-105		*2N1613	
EN 1711	Fch	Si-N	=2N1711: 0.3W	8a	TO-105		*2N1711	
EN 2218	Fch	Si-N	=2N2218: 0.35W	8a	TO-105		*2N2218	
EN 2219	Fch	Si-N	=2N2219: 0.35W	8a	TO-105		*2N2219	
EN 2221	Fch	Si-N	=2N2221: 0.2W	8a	TO-106		*2N2221	
EN 2222	Fch,Nsc	Si-N	=2N2222: 0.2W	8a	TO-106		*2N2222	
EN 2369 A	Fch	Si-N	=2N2369A: 0.2W	8a	TO-106		*2N2369A	
EN 2484	Fch,Nsc	Si-N	=2N2484: 0.2W	8a	TO-106		*2N2484	
EN 2894 A	Fch	Si-P	=2N2894A: 0.2W	8a	TO-106		*2N2894A	
EN 2904	Fch	Si-P	=2N2904: 0.3W	8a	TO-105		*2N2904	
EN 2905	Fch,Nsc	Si-P	=2N2905: 0.3W	8a	TO-105		*2N2905	
EN 2906	Fch	Si-P	=2N2906: 0.2W	8a	TO-106		*2N2906	
EN 2907	Fch,Nsc	Si-P	=2N2907: 0.2W	8a	TO-106		*2N2907	
EN 3009	Fch	Si-N	=2N3009: 0.2W	8a	TO-106		*2N3009	
EN 3011	Fch	Si-N	=2N3011: 0.2W	8a	TO-106		*2N3011	
EN 3013	Fch	Si-N	=2N3013: 0.2W	8a	TO-106		*2N3013	
EN 3014	Fch	Si-N	=2N3014: 0.2W	8a	TO-106		*2N3014	
EN 3250	Fch	Si-P	=2N3250: 0.2W	8a	TO-106		*2N3250	
EN 3502	Fch,Nsc	Si-P	=2N3502: 0.3W	8a	TO-105		*2N3502	
EN 3504	Fch,Nsc	Si-P	=2N3504: 0.2W	8a	TO-106		*2N3504	
EN 3903	Fch	Si-N	=2N3903: 0.31W	8a	TO-106		*2N3903	
EN 3904	Fch	Si-N	=2N3904: 0.31W	8a	TO-106		*2N3904	
EN 3905	Fch	Si-P	=2N3905: 0.31W	8a	TO-106		*2N3905	
EN 3906	Fch	Si-P	=2N3906: 0.31W	8a	TO-106		*2N3906	

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
EN 3962	Fch	Si-P	=2N3962: 0,2W	8a	TO-106		•2N3962	
EN 4123	Fch	Si-N	=2N4123: 0,2W	8a	TO-106		•2N4123	
EN 4124	Fch	Si-N	=2N4124: 0,2W	8a	TO-106		•2N4124	
EN 4125	Fch	Si-P	=2N4125: 0,2W	8a	TO-106		•2N4125	
EN 4126	Fch	Si-P	=2N4126: 0,2W	8a	TO-106		•2N4126	
EN 5172	Fch	Si-N	=2N5172: 0,2W	8a	TO-106		•2N5172	
EO		Si-N	=2SC2882-O (SMD-Marking)	39	SOT-89		•2SC2882	
EO		Si-N	=2SC3265-O (SMD-Marking)	35	SOT-23		•2SC3265	
EO		Si-N	=2SC5097-O (SMD-Marking)	44	SOT-143		•2SC5097	
EO		Si-N	=KTC4374-O (SMD-Marking)	39	SOT-89		•KTC 4374	
EP		Si-P	=2SB789A-P (SMD-Marking)	39	SOT-89		•2SB789A	
EP		Z-Di	=SM 6T 27A (SMD-Marking)	71a(6x4mm)	SOD-6		•SM 6T....	
EP		Si-N	=XN 4556 (SMD-Marking)	46	SOT-163		•XN 4556	
EP 01 C	Sak	Si-Di	FRr, 1000V, 0,2A, Uf<4V(0,2A), 200ns	31a	SOD-22	BA 159	31a	BA 159, BYT 11/1000, BYT 52M, BYV 26E
EQ								
EQ		Si-P	=2SB789A-Q (SMD-Marking)	39	SOT-89		•2SB789A	
EQ		Z-Di	=SM 6T 30 (SMD-Marking)	71a(6x4mm)	SOD-6		•SM 6T....	
EQ		N-FET	=XP 1D874 (SMD-Marking)	45(2mm)	SOT-353		•XP 1D874	
EQA 01-05....35	Fjd	Z-Di	5...35V, 0,5W	31a	SOD-22	Z-DiodeV	31a	BZX55/... BZX83/... ZPD... 1N5231...58,++
EQB 01-05....35	Fjd	Z-Di	5...35V, 1W	31a	(7,5x4mm)0	Z-DiodeV	31a	BZW22/... BZX61/... ZPY... 1N5918...38,++
ER								
ER 0082		EAROM-IC	128x1 Bit		18-DIP			MN 1213
ER		Si-P	=2SB789A-R (SMD-Marking)	39	SOT-89			•2SB789A
ER		Si-N	=2SC5097-R (SMD-Marking)	44	SOT-143			•2SC5097
ER		Z-Di	=SM 6T 30A (SMD-Marking)	71a(6x4mm)	SOD-6			•SM 6T....
ER		Si-N/P	=XP 4683 (SMD-Marking)	46(2mm)	SOT-363			•XP 4683
ER 900	Tra	Diac	=BDW 32	31l				A 9903, D 32
ER 1400	Gie	EAROM-IC	100x14 Bit		14-DIP			M5G1400, PCB 1400
ERB 06-13	Aeg.Sie	Si-Di	TV-Rr, 1300, 1A, Uf<1,5V(4A), <4µs	31a	DO-15	BY 228	31a	BY 231/1400, BY 350/1300, BY 400, ++
ERB 12-01....10		Si-Di	Rr, Uni, 100...1000V, 1A	31a		1N4007	31a	BY 126...127, BY 133...135, 1N4002...07, ++
ERB 24-04C....06C		Si-Di	FRr, 400...600V, 1A, <700ns	31a		BYD 33 M	31a	BYX 55/600, MR 814...818, RGP 10G...M, ++
ERB 24-04D....06D		Si-Di	FRr, 400...600V, 0,7A, <1µs	31a		BYD 33 M	31a	BYX 55/600, MR 814...818, RGP 10G...M, ++
ERC 01-06	Aeg.Sie	Si-Di	Rr, Uni, 600V, 1,5A, Uf<1,1V(4A)	31a	(7,5x6mm)0	BYD 33 M	31a	BYD 13J...M, BY 227...227, GP 15J...M, ++
ERC 01-10		Si-Di	=ERC 01-06: 1000V	31a		BYD 33 M	31a	BYD 13M, BY 227, GP 15M, RGP 15M, ++
ERC 05-08	Aeg.Sie	Si-Di	Rr, Uni, 800V, 1,2A, Uf<1V(4A)	31a	(7,5x4mm)0	BYD 33 M	31a	BYD 13K...M, BY 227, GP 15K...M, ++
ERC 06-13	Aeg.Sie	Si-Di	Rr, Uni, 1300V, 1,5A, Uf<1,5V(4A), <4µs	31a	(7,5x6mm)0	BY 228	31a	BY 231/1400, BY 350/1300, BY 400, ++
ERC 06-15		Si-Di	=ERC 06-13: 1500V	31a	(7,5x6mm)0	BY 228	31a	BY 231/1500, BY 350/1500, BY 448, ++
ERD 29-06	Aeg.Sie	Si-Di	TV-Rr, 600, 2,5A, <400ns	31a	(10x7,5)0	BYW 95 C	31a	BYW 14/600, BYW 95C, RGP 30J...M, ++
ES								
ES		Si-P	=2SA1745 (SMD-Marking)	35(2mm)	SOT-323			•2SA1745
ES		Si-P	=2SA1753 (SMD-Marking)	35	SOT-23			•2SA1753
ES		Si-P	=2SB789A-S (SMD-Marking)	39	SOT-89			•2SB789A
ES		Si-N+Di	=2SD1974 (SMD-Marking)	39	SOT-89			•2SD1974
ES		Si-N	=BCX 41R (SMD-Marking)	35	SOT-23			•BCX 41R
ES		Z-Di	=SM 6T 33 (SMD-Marking)	71a(6x4mm)	SOD-6			•SM 6T....
ES 1,01(A,Z)	Sak	Si-Di	Rr, 200...600V, 0,7A, Uf<2,5V(0,8A), 1,5µs ES 1,01=400V, A=600V, Z=200V	31a	SOD-22	1N4007	31a	BY 126...127, BY 133...134, 1N4003...07, ++
ES 1 F	Sak	Si-Di	FRr, 1500V, 0,5A, Uf<2V(0,5A), <400ns	31a	SOD-22	BY 228	31a	BY 269, BY 231/1500, RGP 15-16
ESAB 01-....		Si-Di	Dual, 100V, 1,5A			2x 1N4007	31a	-
ESAB 03-....		Si-Br				B250C1500	8	-
ESK 1/....		Si-Di		27c		BY 255	31a	-
ESM								
ESM 22-100...600(N)	Tho	Triac	100...600V, 2,5A=(Tc=75°), Igt/Ih<40/<30mA	2m	TO-39			T 2303... TAG 208...
ESM 23-100...600	Tho	Triac	100...600V, 6A=(Tc=75°), Igt<80mA	22m	TO-66			TAG 260... TAG 265... T 4700...
ESM 28	Tho	Si-N	LF P, 30/30V, 4A, 25W, 3MHz	(ESM29 17j)	TO-220	BD 243 C	17j	BD 243, BD 533, BD 539, BD 947, ++
ESM 29	Tho	Si-P	LF P, 30/30V, 4A, 25W, 3MHz	(ESM28 17j)	TO-220	BD 244 C	17j	BD 244, BD 534, BD 540, BD 948, ++
ESM 168	Tho	LIN-IC	Prellschutz-Fliptlop/Chatter Suppressor, 3...30V	5	TO-72			-
ESM 188M/450...750	Tho	F-Thy	TV-HA, 450...750V, 5A=(Tc=60°), Igt<60mA, <2,7µs	22a	TO-66	170881*	17f	S 3703... (BSiCC01...H, TD3F...H)¹
ESM 189M/450...750	Tho	F-Thy	TV-HA, 450...750V, 5A=(Tc=60°), Igt<60mA, <5µs	22a	TO-66	170891*	17f	S 60800... (BSiCC01...R, TD3F...R)¹
ESM 206 EV	Tho	CMOS-IC	Schrittmotorsteuerung/Stepper Motor Control, 4 Ph.	14-DIP				-
ESM 217	Tho	Si-N-Darl	LF P, 60/60V, 10A, 70W, >4MHz, hFE>1000	(ESM261 17j)	TO-220	BDW 93 C	17j	BDT 63(A...C), BDW 93A...C, BDX 33A...D, ++
ESM 218	Tho	Si-N-Darl	=ESM 217: 80/80V	(ESM262 17j)	TO-220	BDW 93 C	17j	BDT 63A...C, BDW 93B...C, BDX 33B...D, ++
ESM 222 R	Tho	LIN-IC	=TDA 1042: profess. Version	23/8Pin	=TO-3			-
ESM 227(A)	Tho	LIN-IC	Motorregler/Speed Ctrl., 3,8...18V, 1,8A	14-QIP				UL 1901
ESM 227 N	Tho	LIN-IC	=ESM 227: Fig. →	14-QIP+d				-
ESM 228M/450...750	Tho	F-Thy+Di	TV-HA, 450...750V, 5A, Igt<60mA, <2,7µs	22a	TO-66	17088*	17f	BSiCC01...H, TD3F...H, TD4F...H
ESM 229M/450...750	Tho	F-Thy+Di	TV-HA, 450...750V, 5A, Igt<60mA, <5µs	22a	TO-66	17089*	17f	BSiCC01...R, TD3F...R, TD4F...R
ESM 231(N)	Tho	LIN-IC	LF Out, 15W(18V/4Ω)	14-QIP+d				TBA 790, TCA 150, TDA 1042
ESM 249R/500	Tho	F-Thy+Di	500V, 5A, Igt<60mA, <25µs	22a	TO-66	TD 3FP 800H*	17f	TD3F500H, TD4F500H, S 60878
ESM 261	Tho	Si-P-Darl	LF P, 60/60V, 10A, 70W, >4MHz, hFE>1000	(ESM217 17j)	TO-220	BDW 94 C	17j	BDT 62(A...C), BDW 94A...C, BDX 34A...D, ++
ESM 262	Tho	Si-P-Darl	=ESM 261: 80/80V	(ESM218 17j)	TO-220	BDW 94 C	17j	BDT 62A...C, BDW 94B...C, BDX 34B...D, ++
ESM 273	Tho	LIN-IC	=TDA 1104(SP)	17-SQL				TDA 1104(SP)
ESM 302 EV	Tho	CMOS-IC	Rhythmus-Generator/Rhythm Generator	16-DIP				-
ESM 303	Tho	LIN-IC	Motor Control					-
ESM 310(BP)	Tho	LIN-IC	=TDA 1100(SP)	11-SIL				TDA 1100(SP)
ESM 312	Tho	LIN-IC	Motorregler/Speed Control, 3...18V, 1A	8-DIP+b				-
ESM 313/....R	Tho	F-Thy	100...600V, 40A, Igt/Ih<150/<200mA, <5µs	23a	TO-3			-
ESM 352	Tho	LIN-IC	=TEA 1000	14-DIP				TEA 1000
ESM 374	Tho	Z-IC	+12V, 140mA	7c	TO-92	78L12/TO-92	7b	-
ESM 375....	Tho	LIN-IC	=TEA 1035....-DIP				TEA 1035....
ESM 400(A)	Tho	Si-N	TV-VA, 170V, 1,5A, 20W, 1MHz	17j	TO-220	2SD1138	17j	BD 239E, 2SD386, 2SD578, 2SD1138, ++
ESM 416	Tho	LIN-IC	=SAY 115: Fig. →	14-DIP				(SAY 115)
ESM 427	Tho	LIN-IC	Ionisations-Rauchmelder/Smoke Detector	14-DIP				-
ESM 432	Tho	LIN-IC	=ESM 432C: Fig. →	14-QIP				-
ESM 432 C	Tho	LIN-IC	=ESM 532 C: 30V, 3,5A, 20W(28V/4Ω)	11-SIL				ESM 532 C, TDA 1111
ESM 432 N	Tho	LIN-IC	=ESM 432C: Fig. →	14-QIP+d				-
ESM 463	Tho	LIN-IC	=TEA 1001	17-SOL				TEA 1001
ESM 504/....	Tho	50Hz-Thy	50...600V, 4A=(Tc=75°), Igt/Ih<20/<50mA, 25µs	17e	TO-220	TAG 626-600	17e	TAG 630-.... TAG 620-.... TIC 116.... ++
ESM 508/....	Tho	50Hz-Thy	50...600V, 8A=(Tc=75°), Igt/Ih<40/<60mA	17e	TO-220	TAG 626-600	17e	TAG 655-.... 2N6394...6399, BSiD10.... ++

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
ESM 509/....	Tho	50Hz-Thy	50...600V, 10A-(Tc=75°), Igt/Ih<40/<60mA	17e	TO-220		2N6394...6399, BS1D10.... BT 152/...., ++	
ESM 532	Tho	LIN-IC	=ESM 532C: Fig. *	14-QIP			-	
ESM 532 C	Tho	LIN-IC	LF Out, 32V, 3.5A, 20W(28V/4s)	11-SIL			TDA 1111(SP)	
ESM 532 N	Tho	LIN-IC	=ESM 532C: Fig. *	14-QIP+d			-	
ESM 566	Tho	LIN-IC	=TEB 1013: ohne Basisvorwrdst./wo. Base Resistor	11-SIL			(L 702SP, TEB 1013)	
ESM 567	Tho	LIN-IC	=TEA 1034	16-DIP			TEA 1034	
ESM 568 A	Tho	LIN-IC	=TEA 2015A	13-SQL			TEA 2015A	
ESM 573 C	Tho	LIN-IC	=TEA 1020(SP)	17-SQL			TEA 1020(SP)	
ESM 585	Tho	IC	Teletext-Demodulator (Antiope)				-	
ESM 586	Tho	IC	Teletext-Demodulator (Antiope)				-	
ESM 620	Tho	LIN-IC	=TDA 1099	11-SIL			TDA 1099	
ESM 621	Tho	LIN-IC	=TDA 1098	14-DIP			TDA 1098	
ESM 631 CM	Tho	LIN-IC	Näherungsschalter/Proximity Detector, 4...35V	TO-99			-	
ESM 631 DP	Tho	LIN-IC	=ESM 631CM: Fig. *	8-DIP			-	
ESM 631 FP	Tho	LIN-IC	=ESM 631CM: SMD	8-MDIP			-	
ESM 632 C	Tho	LIN-IC	=ESM 532 C: 26V, 3.5A, 14W(24V/4s)	11-SIL			ESM 532 C, TDA 1111	
ESM 700	Tho	Z-IC	=TCA 700	14d			-TCA 700	
ESM 707	Tho	LIN-IC	Tacho-Generator	8-DIP			-	
ESM 732 C	Tho	LIN-IC	=ESM 532 C: 18V, 3.5A, 8W(14V/4s)	11-SIL			ESM 532 C, TDA 1111	
ESM 740(G)	Tho	Thy	asym. -5...300V, 10A, Igt<50mA, <15µs	30b	(TO-220MF)	ESM 740*	30b	-
ESM 900	Tho	LIN-IC	=TCA 900: Fig. *	5	TO-72		-	
ESM 901	Tho	LIN-IC	=TCA 900: Fig. *	4-DIP+b			-	
ESM 910	Tho	LIN-IC	=TCA 910: Fig. *	5	TO-72		-	
ESM 911	Tho	LIN-IC	=TCA 910: Fig. *	4-DIP+b			-	
ESM 1231 C	Tho	LIN-IC	=TDA 1103(SP)	11-SIL			TDA 1103(SP)	
ESM 1350 P	Tho	LIN-IC	TV IF, AM/FM IF	8-DIP			MC 1350	
ESM 1406	Tho	Z-IC	+6V, 0,78A	14b	TO-126	7806/TO-220	17b	... 78N06 (TO-126)
ESM 1410	Tho	Z-IC	+10V, 0,68A	14b	TO-126	7810/TO-220	17b	... 78N10 (TO-126)
ESM 1532 C	Tho	LIN-IC	=TDA 1102(SP)	11-SIL			TDA 1102(SP), TDA 1111(SP)	
ESM 1600 B	Tho	KOP-IC	Quad, Pegelumsetzer/Level Shift	14-DIP			-	
ESM 1600 BFP	Tho	KOP-IC	=ESM 1600B: SMD	14-MDIP			-	
ESM 1601	Tho	LIN-IC	=TDE 1064, TDF 1064				TDE 1064, TDF 1064	
ESM 1602 B	Tho	KOP-IC	Quad, Pegelumsetzer/Level Shift	14-DIP			-	
ESM 1631 CM	Tho	LIN-IC	=ESM 631CM: 4...20V	TO-99			ESM 631CM	
ESM 1631 DP	Tho	LIN-IC	=ESM 631DP: 20V	8-DIP			ESM 631DP	
ESM 1631 FP	Tho	LIN-IC	=ESM 631FP: 20V	8-MDIP			ESM 631FP	
ESM 1637	Tho	KOP-IC	50V, 1A	TO-99/6Pin			-	
ESM 2633	Tho	Si-N	=2N3055	23a	TO-3	2N3055	23a	*2N3055
ESM 2666	Tho	Si-N	S P, 1500/600V, 6A, 75W(Tc=95°), sat<5V(5A)	23a	TO-3	BU 508 A	18j	BU 508A, 2SD350A, 2SD649, 2SD821,++
ESM 2667	Tho	Si-N	=ESM2666: 1500/700V	23a	TO-3	BU 508 A	18j	BU 508A, 2SD350A, 2SD821, 2SD649,++
ESM 2668	Tho	Si-N	=BU 526	23a	TO-3	-BU 526		*BU 526
ESM 2725	Tho	Si-N	=BF 459			BF 459	14h	*BF 459
ESM 2731	Tho	Si-N	=BU 526	23a	TO-3	-BU 526		*BU 526
ESM 2808	Tho	Si-N+Di	=BU 800	23a	TO-3	BU 208 D	23a	*BU 800
ESM 4629	Tho	Thy		17	TO-220			-
ESM 7040	Tho	MOS-IC	8x Latch & Driver, 50V, 0,5A	24-DIP				-
ET....EZ								
ET		Si-N	=2SC4120 (SMD-Marking)	35	SOT-23			*2SC4120
ET		Si-N-Darl	=2SD1471-ET (SMD-Marking)	39	SOT-89			*2SD1471
ET		GaAs-N-FET-d	=3SK273 (SMD-Marking)	44	SOT-143			*3SK273
ET		Si-N	=BCW 65RA (SMD-Marking)	35	SOT-23			*BCW 65RA
ET		Z-Di	=SM 6T 33A (SMD-Marking)	71a(6x4mm)	SOD-6			*SM 6T....
ET 2128(J,N)....	Tho	sRAM-IC	2k x 8Bit, 150...200ns	24-DIP				... 4016...
ET 2147 H....	Tho	sRAM-IC	4k x 1Bit, 35...70ns	18-DIP				... 2147...
ET 2716 Q....	Tho	EPROM-IC	2k x 8Bit, 350...450ns, 525/132mW	24-DIP				... 2716...
ET 2764 Q....	Tho	EPROM-IC	8k x 8Bit, 150...450ns, 525/132mW	28-DIP				... 2764...
ET 4116 J.N....	Tho	dRAM-IC	16k x 1Bit, 150...200ns	16-DIP				... 4116...
ET 4164 J.N....	Tho	dRAM-IC	64k x 1Bit, 150...200ns	16-DIP				... 4164...
ET 93....	Tho	µC-IC	8-Bit µComp.					-
ET 94....	Tho	µC-IC	4-Bit µComp.					-
ET 27128 Q....	Tho	EPROM-IC	16k x 8Bit, 150...450ns, 525/105mW	28-DIP				... 27128...
ET 90400	Tho	µC-IC	4-Bit µComp.					-
ETC 2716 Q....	Tho	EPROM-IC	2k x 8Bit, 350...450ns	24-DIP				... 2716...
ETC 2732 Q....	Tho	EPROM-IC	4k x 8Bit, 350...450ns	24-DIP				... 2732...
ETC 5040	Tho	CMOS-IC	Telecom, PCM Codec-Filter	16-DIP				M 5912, KT 3040, TP 3040, µA 5912, 2912
ETC 5051	Tho	CMOS-IC	Telecom, 1-Kanal/Channel µ-Law Par.-Combo	20-DIP				-
ETC 5054	Tho	CMOS-IC	Telecom, 1-Kanal/Channel µ-Law Ser.-Combo	16-DIP				-
ETC 5054	Tho	CMOS-IC	*KT 3030, KT 8554	16-DIC				KT 3030, TP 3054, µA 3054, 2916
ETC 5056	Tho	CMOS-IC	Telecom, 1-Kanal/Channel A-Law Par.-Combo	20-DIP				-
ETC 5057	Tho	CMOS-IC	Telecom, A-Law Combo Codec	16-DIP				KT 3032, TP 3057, µA 3057, 2917
ETC 5064	Tho	CMOS-IC	Telecom, µ-Law Combo Codec	20-DIP				KT 3031, KT 3064, TP 3064
ETC 5067	Tho	CMOS-IC	Telecom, A-Law Combo Codec	20-DIP				KT 3033, TP 3067
ETC 92....	Tho	µC-IC	16-Bit µComp.					-
ETC 93....	Tho	µC-IC	8-Bit µComp.					-
ETC 94....	Tho	µC-IC	4-Bit µComp.					-
ETL 2128(J,N)....	Tho	sRAM-IC	2k x 8Bit, 150...200ns	24-DIP				... 4016...
ETL 2147 H....	Tho	sRAM-IC	4k x 1Bit, 55...70ns	18-DIP				... 2147...
ETL 93....	Tho	µC-IC	8-Bit µComp.					-
ETL 94....	Tho	µC-IC	4-Bit µComp.					-
EU		Si-N	=BCW 65RB (SMD-Marking)	35	SOT-23			*BCW 65RB
EU		Z-Di	=SM 6T 36 (SMD-Marking)	71a(6x4mm)	SOD-6			*SM 6T....
EU (0)1(A,Z)	Sak	Si-Di	FRr, 200...600V, 0,25A, Uf<2,5V(0,25A), 400ns EU(0)1=400V, A=600V, Z=200V	31a	SOD-22	BA 159	31a	BA 157...159, BY 204/...., BYX 57/...
EU (0)2(A,Z)	Sak	Si-Di	FRr, 200...600V, 1A, Uf<1,4V(1A), 400ns EU(0)2=400V, A=600V, Z=200V	31a	SOD-22	BYD 33 M	31a	BYD 33J...M, BYT 11/600, BYT 52J...M,++
EU 2 YX	Sak	Si-Di	FRr, 100V, 1,2A, Uf<0,9V(1,2A), 200ns	31a	SOD-22	BYD 33 M	31a	BYD 33D...M, BYT 11/600, BYT 52B...M,++
EV		PIN-Di	=1SV241 (SMD-Marking)	45	SOT-153			*1SV241
EV		Z-Di	=SM 6T 36A (SMD-Marking)	71a(6x4mm)	SOD-6			*SM 6T....
EW		Si-N	=BCW 65RC (SMD-Marking)	35	SOT-23			*BCW 65RC
EW		Z-Di	=SM 6T 39 (SMD-Marking)	71a(6x4mm)	SOD-6			*SM 6T....
EX		Si-N	=2SD2402-EX (SMD-Marking)	39	SOT-89			*2SD2402
EX		Si-N	=BCW 66RF (SMD-Marking)	35	SOT-23			*BCW 66RF

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
EX		Z-Di	=SM 6T 39A (SMD-Marking)	71a(6x4mm)	SOD-6		*SM 6T....
EX 0022 TA		Z-Di	11,5V	31a	Z-Diode 11V	31a	
EX 0048 CE		Z-Di	6,2V	31a	Z-Diode 6,2V	31a	
EX 0074 CE		Z-Di	115V	31a	Z-Diode 110V	31a	
EXB 919	Fjd	Hybrid-Z-IC	Z-IC, +100V, 0,2A				
EY		Si-N	=2SC2882-Y (SMD-Marking)	39	SOT-89		*2SC2882
EY		Si-N	=2SC3265-Y (SMD-Marking)	35	SOT-23		*2SC3265
EY		Si-N	=2SC3398 (SMD-Marking)	35	SOT-23		*2SC3398
EY		Si-N	=2SC4398 (SMD-Marking)	35(2mm)	SOT-323		*2SC4398
EY		Si-N	=2SD2402-EY (SMD-Marking)	39	SOT-89		*2SD2402
EY		Si-N	=BCW 66RG (SMD-Marking)	35	SOT-23		*BCW 66RG
EY		Si-N	=KTC3265-Y (SMD-Marking)	35	SOT-23		*KTC 3265
EY		Si-N	=KTC4374-Y (SMD-Marking)	39	SOT-89		*KTC 4374
EYV-320(D)		Si-Di	=BA 127	31a		1N4148	31a
EZ		Si-N	=2SD2402-EZ (SMD-Marking)	39	SOT-89		*2SD2402
EZ		Si-N	=BCW 66RH (SMD-Marking)	35	SOT-23		*BCW 66RH
EZ-055....-372	Njr	Z-Di	5...37V, 0,4W	31a	DO-41	Z-Diode ...V	31a
							BZX55/... BZX83/... ZPD... 1N5231...58,++
F							
F		Si-N	=2SC4399 (SMD-Marking)	35(2mm)	SOT-323		*2SC4399
F 1		Si-N	=2SC1009-F1 (SMD-Marking)	35	SOT-23		*2SC1009
F 1(p)		Si-N	=BFS 18 (SMD-Marking)	35	SOT-23		*BFS 18
F 1 E23	Shi	MOS-N-FET-e	=2SK1195				
F 1 E50	Shi	MOS-N-FET-e	=2SK1672				
F 1 E90	Shi	MOS-N-FET-e	=2SK1533				
F10		Si-P	=KSA 1182-O (SMD-Marking)	35	SOT-23		*KSA 1182
F1Y		Si-P	=KSA 1182-Y (SMD-Marking)	35	SOT-23		*KSA 1182
F 2		Si-N	=2SC1009-F2 (SMD-Marking)	35	SOT-23		*2SC1009
F 2		Si-N	=2SC2814-F2 (SMD-Marking)	35	SOT-23		*2SC2814
F 2(p)		Si-N	=BFS 19 (SMD-Marking)	35	SOT-23		*BFS 19
F02		N-FET	=SO 4091 (SMD-Marking)	35	SOT-23		*SO 4091
F 3		Si-Di	=1SS193 (SMD-Marking)	35	SOT-23		*1SS193
F 3		Si-N	=2SC1009-F3 (SMD-Marking)	35	SOT-23		*2SC1009
F 3		Si-N	=2SC2814-F3 (SMD-Marking)	35	SOT-23		*2SC2814
F 3		Si-N	=BF 840 (SMD-Marking)	35	SOT-23		*BF 840
F03		N-FET	=SO 4391 (SMD-Marking)	35	SOT-23		*SO 4391
F 3 T		Si-Di	=1PS193 (SMD-Marking)	35	SOT-23		*1PS193
F 3 V50	Shi	MOS-N-FET-e	=2SK1244				
F 3 V90	Shi	MOS-N-FET-e	=2SK1534				
F 3 W90	Shi	MOS-N-FET-e	=2SK1536				
F 4		Si-N	=2SC1009-F4 (SMD-Marking)	35	SOT-23		*2SC1009
F 4		Si-N	=2SC2814-F4 (SMD-Marking)	35	SOT-23		*2SC2814
F 4		Si-N	=BFS 18R (SMD-Marking)	35	SOT-23		*BFS 18R
F 5		Si-Di	=1SS250 (SMD-Marking)	35	SOT-23		*1SS250
F 5		Si-Di	=1SS370 (SMD-Marking)	35(2mm)	SOT-323		*1SS370
F 5		Si-N	=2SC1009-F5 (SMD-Marking)	35	SOT-23		*2SC1009
F 5		Si-N	=2SC2814-F5 (SMD-Marking)	35	SOT-23		*2SC2814
F 5		Si-N	=BFS 19R (SMD-Marking)	35	SOT-23		*BFS 19R
F 05 E23	Shi	MOS-N-FET-e	=2SK1194				
F 5 V50	Shi	MOS-N-FET-e	=2SK1246				
F 5 W50	Shi	MOS-N-FET-e	=2SK1537				
F 6		Si-N	=2SC2223-F6 (SMD-Marking)	35	SOT-23		*2SC2223
F 6 V25	Shi	MOS-N-FET-e	=2SK1391				
F 7		Si-Di	=HSM 83 (SMD-Marking)	35	SOT-23		*HSM 83
F07		N-FET	=SO 4392 (SMD-Marking)	35	SOT-23		*SO 4392
F 7 W90	Shi	MOS-N-FET-e	=2SK1538				
F 8(p)		Si-P	=BF 824 (SMD-Marking)	35	SOT-23		*BF 824
F08		N-FET	=SO 4393 (SMD-Marking)	35	SOT-23		*SO 4393
F 9		Si-Di	=1SS321 (SMD-Marking)	35	SOT-23		*1SS321
F09		N-FET	=SO 3966 (SMD-Marking)	35	SOT-23		*SO 3966
F10		N-FET	=SO 4092 (SMD-Marking)	35	SOT-23		*SO 4092
F 10 V25	Shi	MOS-N-FET-e	=2SK1393				
F 10 W50	Shi	MOS-N-FET-e	=2SK1248				
F 10 W90	Shi	MOS-N-FET-e	=2SK1539				
F 11		N-FET	=SO 4093 (SMD-Marking)	35	SOT-23		*SO 4093
F 12		Si-N	=2SC2223-F12(SMD-Marking)	35	SOT-23		*2SC2223
F 12		Si-N	=2SC4178-F12 (SMD-Marking)	35(2mm)	SOT-323		*2SC4178
F 12		N-FET	=SO 245B (SMD-Marking)	35	SOT-23		*SO 245
F 13		Si-N	=2SC2223-F13(SMD-Marking)	35	SOT-23		*2SC2223
F 13		Si-N	=2SC4178-F13 (SMD-Marking)	35(2mm)	SOT-323		*2SC4178
F 13		N-FET	=BFR 30R (SMD-Marking)	35	SOT-23		*BFR 30R
F 14		N-FET	=BFR 31R (SMD-Marking)	35	SOT-23		*BFR 31R
F 14		Si-N	=2SC2223-F14(SMD-Marking)	35	SOT-23		*2SC2223
F 14		Si-N	=2SC4178-F14 (SMD-Marking)	35(2mm)	SOT-323		*2SC4178
F 14 A...J	Nec	Si-Di	Rr, Uni, 100...1000V, 1A, Uf<1V(1A), A=100, B=200V, C=300, D=400, E=500, F=600, H=800, J=1000V	31a	SOD-57	1N4007	31a
							BY 126...127, BY 133...135, 1N4002...07, ++
F15		N-FET	=SO 5432 (SMD-Marking)	35	SOT-23		*SO 5432
F 15 W50	Shi	MOS-N-FET-e	=2SK1249				
F16		N-FET	=SO 5432R (SMD-Marking)	35	SOT-23		*SO 5432R
F17		N-FET	=SO 5433 (SMD-Marking)	35	SOT-23		*SO 5433
F18		N-FET	=SO 5433R (SMD-Marking)	35	SOT-23		*SO 5433R
F19		N-FET	=SO 5434 (SMD-Marking)	35	SOT-23		*SO 5433R
F20		N-FET	=SO 245BR (SMD-Marking)	35	SOT-23		*SO 245
F 20 W25	Shi	MOS-N-FET-e	=2SK1395				
F 20 W50	Shi	MOS-N-FET-e	=2SK1250				
F21		N-FET	=SO 245A (SMD-Marking)	35	SOT-23		*SO 245
F22		N-FET	=SO 4091R (SMD-Marking)	35	SOT-23		*SO 4091R
F23		N-FET	=SO 4391R (SMD-Marking)	35	SOT-23		*SO 4391R
F24		N-FET	=SO 245AR (SMD-Marking)	35	SOT-23		*SO 245AR
F25		N-FET	=SO 245C (SMD-Marking)	35	SOT-23		*SO 245C
F26		N-FET	=SO 245CR (SMD-Marking)	35	SOT-23		*SO 245CR
F27		N-FET	=SO 4392R (SMD-Marking)	35	SOT-23		*SO 4392R
F28		N-FET	=SO 4393R (SMD-Marking)	35	SOT-23		*SO 4393R