


# JAEGER ELEKTRONIK

## SEMICON 1997

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
BUK 427-800A,B	Phi	MOS-N-FET-e	VFET, 600/30V, 45W, 80/275ns(2,8A) A: 4.3/17A, <1Ω(6.5A), B: 3.9/16A, <1.2Ω(6.5A)	16c	SOT-199		BUK 727-600, 2SK1463, 2SK1684, 2SK1859
BUK 428-500A,B	Phi	MOS-N-FET-e	VFET, 500/30V, 45W, 120/410ns(2,9A) A: 6.8/27A, <0.4Ω(8A), B: 6.1/24A, <0.5Ω(8A)	16c	SOT-199		2SK1206, 2SK1523, 2SK1696, 2SK1832
BUK 428-800A,B	Phi	MOS-N-FET-e	VFET, 800/30V, 45W, 160/450ns(2,6A) A: 3.4/14A, <1.5Ω(4A), B: 3/12A, <2Ω(4A)	16c	SOT-199		2SK809A, 2SK1463, 2SK1684, 2SK1859
BUK 428-1000A,B	Phi	MOS-N-FET-e	VFET, 1000/30V, 45W, 160/450ns(2,5A) A: 2.9/12A, <2Ω(3.5A), B: 2.6/10A, <2.6Ω(3.5A)	16c	SOT-199		BUK 426-1000, 2SK1770
BUK 436-50A,B	Phi	MOS-N-FET-e	=BUK 426-50A,B: A=50/200A, B=46/184A, 125W	18p	TO-3P		BUZ 346, 2SK1297, 2SK1379, 2SK1514
BUK 436-60A,B	Phi	MOS-N-FET-e	=BUK 426-60A,B: A=50/200A, B=46/184A, 125W	18p	TO-3P		2SK1297, 2SK1379, 2SK1514, 2SK2096
BUK 436-100A,B	Phi	MOS-N-FET-e	=BUK 426-100A,B: A=33/132A, B=31/124A, 125W	18p	TO-3P		BUZ 345, 2SK850, 2SK906, 2SK1429, ++

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
KSV 3100 ACN-....	Sam	A/D-D/A-IC	8-Bit A/D- + 10-Bit D/A-Converter		40-DIP		
KSV 3110(CN-....)	Sam	A/D-D/A-IC	8 Bit A/D- + 10 Bit D/A-Conv., Video, TTL In/Out		40-DIP		
KSV 3208(CN)	Sam	A/D-IC	8 Bit, hi-speed, TV, Video, 20MSPS, TTL In/Out		28-DIP		
KSV 3310	Sam	D/A-IC	10 Bit, TV, Video, 20MHz		28-DIP		
KSV 3404	Sam						
KSY 13	Sie						

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
KT							
KT							
KT 208(A...V)	GUS				TO-220	BU 806	17j
KT 209(A...V)	GUS						
KT 814 A,B,G,V	GUS				TO-220Iso		
KT 815 A,B,G,V	GUS				TO-220	BU 806	17j
KT 816 A,B,G,V	GUS				TO-220Iso		
KT 817 A,B,G,V	GUS				TO-3P Iso		
KT 818 A,B,G,V	GUS				TO-3P Iso		
KT 819 A,B,G,V	GUS				TO-3		
KT 3030	Sam				TO-220	2SD798	17j
KT 3031	Sam						
KT 3032	Sam						
KT 3033	Sam						
KT 3040 J	Sam						
KT 3054 J	Sam						
KT 3064 J	Sam						
KT 3107(A...V)	GUS						
KT 3170 J,N	Sam						
KT 5116 J	Sam						
KT 8518	Sam						
KT 8520	Sam						
KT 8521	Sam						
KT 8554(J)	Sam						
KT 8555(J)	Sam						
KT 8557(J)	Sam						
KT 8592(N)	Sam						
KT 8593(N)	Sam						
KTA 200	Kec						
KTA 473	Kec						
KTA 940	Kec						
KTA 950	Kec						
KTA 968(A)	Kec						
KTA 1001	Kec						
KTA 1015	Kec						
KTA 1021	Kec						
KTA 1023	Kec						
KTA 1024	Kec						
KTA 1070	Kec						
BU 806	Phi,Sgs,Tix	Si-N-Darl+Di	TV-HA, 400/200V, 8/15A, 60W, sat<1,5V(5A)	17j	TO-220	BU 806	17j
BU 806 AF		Si-N-Darl+Di	=BU 806: Iso	17c			
BU 806 FI	Tho	Si-N-Darl+Di	=BU 806: Iso, 30W		TO-220Iso		
BU 807	Phi,Sgs,Tix	Si-N-Darl+Di	=BU 806: 330/150V	17j	TO-220	BU 806	17j
BU 807 FI	Tho	Si-N-Darl+Di	=BU 807: Iso, 30W	17c			
BU 808 DFI [SGS]	Sgs	Si-N-Darl+Di	=BU 808FI: integr. Damper-Diode	18c	TO-3P Iso		
BU 808 FI [SGS]	Sgs	Si-N-Darl	CTV-HA, 1400/700V, 5/10A, 50W, hFE>25 sat<1,6V(5A)	18c	TO-3P Iso		
BU 808 [Philips]	Phi	Si-N	3Ph.-Motor Drv, 1500/700V, 12/20A, 160W, sat<1V(9V)	23a	TO-3		
BU 810	Sgs	Si-N-Darl+Di	S P, 600/400V, 7/10A, 75W, <0.6/2µs, sat<3V(7A)	17j	TO-220	2SD798	17j
BU 824	Phi	Si-N-Darl+Di	S P, 650/375V, 0.5/1A, 12.5W, hFE>325, <1/2,5µs	13h	TO-202		
BU 826	Phi	Si-N-Darl+Di	S P, 800/375V, 6/8A, 125W, <1,3/2,2µs, sat<2.5V(4A)	18j	TO-3P	BU 826	18j
BU 826 A		Si-N-Darl+Di	=BU 826: 1000/400V	18j	TO-3P		
BU 900	Tho	Si-N-Darl	Tripletion, 650/400V, 8A, 70W, hFE>7000, sat<4V(3A) Et. Zündung/Ignition, Z-Diode	17j	TO-220		
BU 902	Aeg	Si-N	S P, TV-SMPS	18j	TO-3P	BU 908	18j
BU 902 F		Si-N	=BU 902			BU 508 AF	16c
BU 903	Aeg,Phi	Si-N			TO-3P	BU 903	18j
BU 903 F		Si-N				BU 508 AF	16c
BU 908	Aeg	Si-N				BU 908	18j
BU 908 AF		Si-N				BU 508 AF	16c
BU 910	Sgs					BU 806	17j
BU 911	Sgs					2SD798	17j
BU 912						2SD798	17j
BU 920	Sgs						
BU 920 P							
BU 920 PFI							
BU 920 T							
BU 921							
BU 921 P							
BU 921 PFI							
BU 921 T							
BU 921 ZP							
BU 921 ZPF							
BU 921 ZT							
BU 921 ZTFI							
BU 922							
BU 922 P							
BU 922 PFI							
BU 922 T							
BU 926	Tho						
BU 930	Sgs						
BU 930 P							
BU 930 Z							
BU 930 ZP							

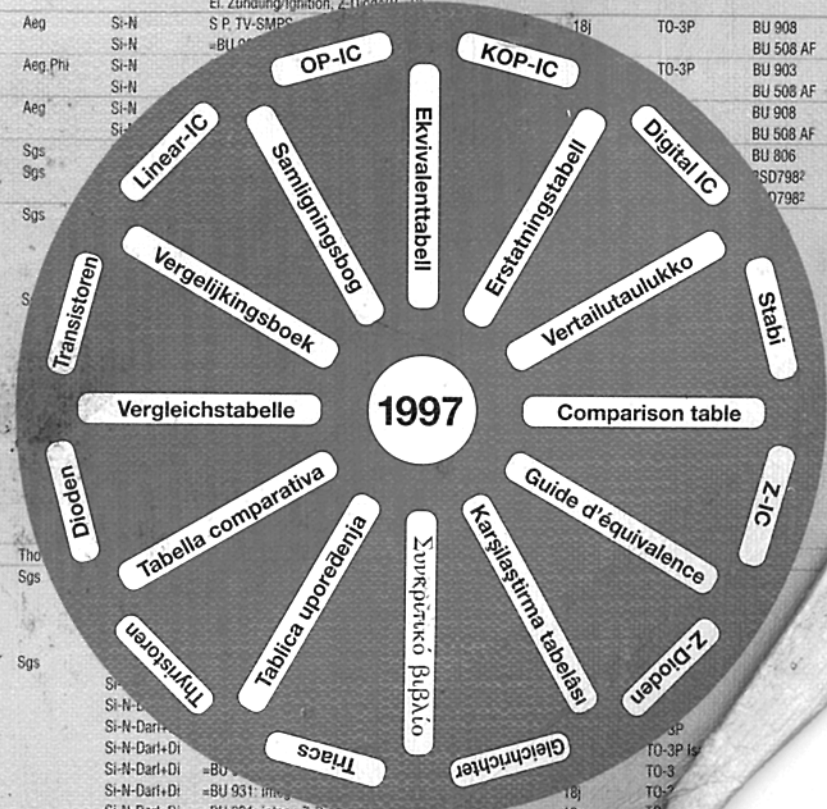

80.000 types

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
2 SD 2463	Nec	Si-N-Darl+Di	int. Z-Di(C -B), 31/31(±4)V, ±2/3A, 1W hFE=2k...30k, 0.5/4µs	9b	(SP-8)			
2 SD 2464	Mat	Si-N	15/10/10V, 5/8A, 0.75W, 170MHz, lo-sat<0.5V(3A)	7c	TO-92	2SD2179	7c(9mm)	2SC4482, 2SD1145
2 SD 2472	Mat	Si-N	SMD, 10/10V, 0.5/0.6A, 120MHz, lo-sat<0.17V(0.25A)	35d	-SOT-23			2SC4577
2 SD 2473	Mat	Si-N	SMD, 20/20V, 0.5/0.6A, lo-sat<0.2V(0.25A)	35d	-SOT-23			2SC4519, 2SC4577
2 SD 2474	Mat	Si-N	SMD, 10/10V, 2/2.4A, 180MHz, sat<0.25V(1A)	2SD2474	39b	SOT-89		2SC3443, 2SC2982, 2SD1621
2 SD 2478	Rhm	Si-N-Darl	P, 80/80V, 4/6A, 30W, 40MHz, hFE=1k...10k	17c	SOT-186	(2SD1415) <sup>8</sup>	17c	2SD1788, (BDT 61BF, 2SD1414, 2SD1589++) <sup>8</sup>
2 SD 2482	Mat	Si-N	=2SD2472:	35a(2mm)	SOT-323			2SC4555
2 SD 2483	Mat	Si-N	=2SD2473:	35a(2mm)	SOT-323			2SC4555
2 SD 2484	Hit	Si-N	50/50V, 2/3A, 0.9W, lo-sat<0.2V(1A)	7c(9mm)	TO-92L	2SD1207	7c(9mm)	2SC3726, 2SD1207, 2SD2069, 2SD2177,++
2 SD 2485	Hit	Si-N	=2SD2484: 80/80V	7c(9mm)	TO-92L			2SC3328, 2SC4489, 2SD2182
2 SD 2488	Sak	Si-N-Darl	P, 200/200V, 15A, 130W, 70MHz, hFE=5k...30k	2SD1620	18j	TO-3P		
2 SD 2489	Sak	Si-N-Darl	=2SD2488: 17A, 200W	2SD1621	20j	TO-3P		
2 SD 2490	Sak	Si-N-Darl	=2SD2488: Iso, 85W	2SD1622	18c	(FM100)		
2 SD 2491	Hit	Si-N	Vid Out, 160/160V, 0.1A, 8W, 140MHz	14b	TO-126 Iso	(2SC3601) <sup>3</sup>	14h	2SC3788, 2SC3955...56
2 SD 2492	Hit	Si-N	=2SD2491: 200/200V	14b	TO-126 Iso	(2SC3601) <sup>3</sup>	14h	2SC3788, 2SC3955...56
2 SD 2493	Sak	Si-N-Darl	P, 110/110V, 6A, 60W, 60MHz, hFE=5k...30k	2SD1624	18j	TO-3P		2SD2221, 2SD2255, 2SD2340, 2SD2386
2 SD 2494	Sak	Si-N-Darl	=2SD2493: Iso	2SD1625	18c	(FM100)		2SD1893...94, 2SD2438
2 SD 2495	Sak	Si-N-Darl	=2SD2493: Iso, 30W	2SD1626	17c	TO-220 Iso		2SD2025
2 SD 2496	Mat	Si-N	=2SD601A:	35d	-SOT-23			*2SD601A
2 SD 2497	Hit	Si-N	40/20V, 5/8A, 0.75W, lo-sat<0.3V(3A)	7c	TO-92	(2SD2179) <sup>17</sup>	9c	2SC4482, 2SD1145, 2SD2243, (2SD2249++) <sup>17</sup>
2 SD 2504	Mat	Si-N	=2SD2464: 5/9A	7c	TO-92	2SD2179	7c(9mm)	2SC4482, 2SD1145
2 SD 2529	Mat	Si-N	=2SD1938:	35d	-SOT-23			*2SD1938
2 SD 2532	Hit	Si-N	=2SD2484: SMD	39b	SOT-89			2SC4409, 2SC4541, 2SD1623...24
2 SD 2533	Hit	Si-N	=2SD2485: SMD	39b	SOT-89			2SC4409, 2SC4541
2 SD 2540	Hit	Si-N	=2SD2497: SMD	39b	SOT-89			2SD1628
2 SF 1168(A)	Mat	50Hz-Thy	200(A=400)V, 6A, Igt/Ih<25/15mA, toff=30µs	22a	TO-66			MCR 218... TAG 625... TAG 651...++
2 SF 1188	Say	F-Thy	TV-HA, +650/-12V, 3.2A(Tc=60°), Igt<30mA, tq<2.5µs (Hinlauf/Trace)	22a	TO-66	TD 3FP 800H <sup>1</sup> *	17f	S 3703, (TD 3F700H, TD 4F700H,++) <sup>1</sup>
2 SF 1189	Say	F-Thy	TV-HA, +600/-6V, 3.2A(Tc=60°), Igt<40mA, tq<4.3µs (Rücklauf/Retrace)	22a	TO-66	TD 3FP 800R <sup>1</sup> *	17f	S 3702, (TD 3F800R, TD 4F800R,++) <sup>1</sup>
2 SF 1418 C...G	Say	F-Thy	200...600V, 3.2A(Tc=60°), 7.5A-, Igt<35mA, tq<4.3µs C=200, D=300, E=400, F=500, G=600V	22a	TO-66	(TAG 626-600) <sup>5</sup>	17e	BTW 27S/..., T 3S..., TAG 670...671S...
2 SF 1420 D...G	Say	F-Thy	300...700V, 3.2A(Tc=75°), 5A-, Igt/Ih<35/<30mA D=300, E=400, F=500, G=600, H=700V	22a	TO-66	(TAG 626-600) <sup>5</sup>	17e	BTW 27S/..., T 3S..., TAG 670...671S...
2 SF 1450-200...600	Hit	50Hz-Thy	=CP 8 C...G					*CP 8...
2 SF 1451-200...600	Hit	50Hz-Thy	=CP 9 C...G					*CP 9...
<b>2SH</b>								
2 SH 11	Nec,Tho	UJT-P	35/30V, 50mA, iEM=2A, 0.45W, Ip<12µA, Iv>7mA, η=0.58...0.75, Rbb=4.5kΩ	2b	TO-5			-
2 SH 12	Nec,Tho	UJT-P	=2SH11: η=0.47...0.62	2b	TO-5			-
2 SH 13	Tos	UJT-P	55/60V, 50mA, iEM=2A, 0.45W, Ip<6µA, Iv>11mA, η=0.47...0.75, Rbb=4.7...10kΩ	2b	TO-5			-
2 SH 14	Tos	UJT-P	=2SH13: Ip<8µA, Iv>8mA, η=0.45...77, Rbb=4.3...12kΩ	2b	TO-5			-
2 SH 15	Tos	UJT-P	25/30V, 50mA, iEM=2A, 0.45W, Ip<12µA, Iv>7mA, η=0.47...0.67, Rbb>4.5kΩ	2b	TO-5			-
2 SH 16(A)	Nec,Tho	UJT-P	30/30V, 50mA, iEM=1A, 0.25W, Ip<12µA, Iv>4mA, η=0.5...0.84, Rbb=4...9kΩ	7g	TO-92			2N2646P
2 SH 17	Nec,Tho	UJT-P	=2SH16: Ip<4µA, Iv>2mA, η=0.5...0.67	7g	TO-92			-
2 SH 18	Gen.Mot	UJT-P	=2SH16: 0.3W	2b,5e	TO-18, -72			-
2 SH 19	Gen.Mot	UJT-P	=2SH17: 0.3W	2b,5e	TO-18, -72			-
2 SH 20	Tos	UJT-P	55/60V, 50mA, iEM=1A, 0.25W, Ip<3.5µA, Iv>6mA, η=0.7...0.85, Rbb=4...12kΩ	2b	TO-18			-
2 SH 21	Tos	UJT-P	=2SH20: Ip<4µA, Iv>4mA	2b	TO-18			-
2 SH 22	Tos	UJT-P	25/30, 50mA, iEM=1A, 0.25W, Ip<4µA, Iv>4mA, η=0.65...0.85, Rbb>4kΩ	2b	TO-18			2SH21
2 SH 23	Nec	UJT-P	25/30V, 100mA, Ifm=2A, 0.45W, Ip<4µA, Iv>7mA, η=0.58...0.64, Rbb=8...20kΩ	2b	TO-5			2SH20
2 SH 24	Nec	UJT-P	=2SH23: Ip<12µA	2b	TO-5			-
2 SH 25	Nec	UJT-P	=2SH23: 75mA, Ifm=1A, 0.3W	7b	TO-92			-
<b>2SJ</b>								
2 SJ 11	Tos	P-FET	Uni, 20V, Idss=0.05...0.9mA, Up=0.7...5V	5n	TO-17			2N2606, 2N5797
2 SJ 12	Tos	P-FET	=2SJ11: Idss=0.09...0.9mA	5n	TO-17			2N2606, 2N5797
2 SJ 13	Tos	P-FET	Uni, 20V, Idss=1...12mA, Up=1...6V	2a(G=case)	TO-5			-
2 SJ 15	Fui	P-FET	Uni, 18V, Idss=1.5mA, Up=6V	2a(G=case)	TO-18			2N5460, 2N5463, 2SJ103, 2SJ105
2 SJ 16	Fui	P-FET	Uni, 18V, Idss=1.5mA, Up=6V	2a(G=case)	TO-18			2N5460, 2N5463, 2SJ103, 2SJ105
2 SJ 17	Son	P-FET	LF, In, 20V, Idss>0.11mA	40d				-
2 SJ 18	Son	P-FET	VFET, 170V, 5A, 63W, 16Ω	2SK60	23a	TO-3		-
2 SJ 19	Nec	P-FET	VFET, LF, 140/30V, 0.1A, 0.8W	2SK69	2a	TO-5		-
2 SJ 20	Nec	P-FET	VFET, 100/40V, 10A, 100W, on=10Ω 2SK70	23a	TO-3			-
2 SJ 21	Nec	P-FET	VFET, 160/30V, 15W, Idss=30...300	2SK71	22a	TO-66		-
2 SJ 22	Son	P-FET	LF, In, 80V, Idss=0.3...0.7mA	2d	TO-18			-
2 SJ 29	Hit	P-FET	VFET, 140V, 10A, 100W, on=15Ω	23a	TO-3			-
2 SJ 32	Shi	P-FET	LF.S, 150V, 0.6W, on=350Ω					-
2 SJ 33	Shi	P-FET	=2SJ32: 200V					-
2 SJ 39	Mit	P-FET	Dual, 50V, 20mA, Idss=1...12mA, Up=6V	7-SIP	(DGSsDGS)			-
2 SJ 40	Mit	P-FET	Analog-S, 50V, Idss=0.6...12mA, Up=0.3...6V	2SK381	41a			-
2 SJ 43	Mat	P-FET	Uni, 50V, 20mA, Idss=0.5...12mA, Up=0.2...3V	2SK127	7a	TO-92		2SJ129
2 SJ 44	Nec	P-FET	Uni In, 40V, 30mA, Idss=1...18mA, Up=0.2...1.5V Urc<20mV	2SK163	7a	TO-92		2N5021, 2SJ74
2 SJ 45	Nec	P-FET	=2SK44: Urc<50mV	7a	TO-92			2N5021, 2SJ74
2 SJ 47	Hit	MOS-P-FET-e	VFET, 100/14V, 7A, 100W, on<1.7Ω, 25/24ns	2SK132	23e	TO-3		2SJ55...56, 2SJ160...162
2 SJ 48	Hit	MOS-P-FET-e	=2SJ47: 120/14V	2SK133	23e	TO-3		2SJ55...56, 2SJ160...162
2 SJ 49	Hit	MOS-P-FET-e	=2SJ47: 140/14V	2SK134	23e	TO-3		2SJ55...56, 2SJ161...162
2 SJ 50	Hit	MOS-P-FET-e	=2SJ47: 160/14V	2SK135	23e	TO-3		2SJ55...56, 2SJ162
2 SJ 51	Hit	P-FET	S,LF In, 40V, 200mA, Idss=6...50mA, Up<1.1V	2SK151	7a(9mm)	TO-92L		2SJ70
2 SJ 55	Hit	MOS-P-FET-e	VFET, 180/20V, 8A, 125W, on=1<1.7Ω	2SK175	23e	TO-3		-
2 SJ 56	Hit	MOS-P-FET-e	=2SJ55: 200/20V	2SK176	23e	TO-3		-
2 SJ 68	Hit	P-FET	S,LF In, 40V, 30mA, Idss=1.6...12mA, Up=0.13...1.5V	7a	TO-92			2SJ104, 2SJ107...108
2 SJ 69	Hit	P-FET	S,LF In, 40V, 30mA, Idss=2.5...20mA, Up=0.13...1.5V	7a	TO-92			2SJ104, 2SJ107...108
2 SJ 70	Hit	P-FET	S,LF In, 40V, 200mA, Idss=6...50mA, Up=0.13...1.5V	7a(9mm)	TO-92L			2SJ51

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SJ 72	Tos	P-FET	Uni, 25V, Idss=5...30mA, Up=0.3...2V	I2SK147	7a(9mm)	TO-92L	2SJ110...111
2 SJ 73	Tos	P-FET	=2SJ72: Matched Pair	I2SK146	2x7a(9mm)	2xTO-92L	(2x2SJ110...111)
2 SJ 74	Tos	P-FET	LF In, MC, 25V, Idss=1...20mA, Up=0.5...2V	I2SK170	7a	TO-92	2N5021, 2SK108
2 SJ 75	Tos	P-FET	=2SJ74: Matched Pair	I2SK240	2x7a	2xTO-92	(2x2N5021)
2 SJ 76	Hit	MOS-P-FET-e*	VFET, 140/15V, 0.5A, 30W, on=10 $\Omega$ , 20/30ns	I2SK213	17d	TO-220	-
2 SJ 77	Hit	MOS-P-FET-e*	=2SJ76: 160/15V	I2SK214	17d	TO-220	-
2 SJ 78	Hit	MOS-P-FET-e*	=2SJ76: 180/15V	I2SK215	17d	TO-220	-
2 SJ 79	Hit	MOS-P-FET-e*	=2SJ76: 200/15V	I2SK216	17d	TO-220	-
2 SJ 81	Hit	MOS-P-FET-e	VFET, 120/15V, 7A, 100W, <1.7 $\Omega$ , 230/110ns	I2SK225	20d	-	(2SJ99...100) <sup>5</sup>
2 SJ 82	Hit	MOS-P-FET-e	=2SJ81: 140/15V	I2SK226	20d	-	(2SJ99...100) <sup>5</sup>
2 SJ 83	Hit	MOS-P-FET-e	=2SJ81: 160/15V	I2SK227	20d	-	(2SJ100) <sup>5</sup>
2 SJ 84	Mat	P-FET	SMD, Uni, 15V, Idss=0.5...12mA, Up=0.2...3	35f	-	SOT-23	-
2 SJ 85	Hit	MOS-P-FET-e	=2SJ76	-	-	-	-
2 SJ 86	Hit	MOS-P-FET-e	=2SJ76	-	-	-	-
2 SJ 87	Hit	MOS-P-FET-e	=2SJ76	-	-	-	-
2 SJ 90	Tos	P-FET	Dual, 30V, Idss=2.6...20mA, Up=0.2...2V	-	7-SIP	(DGSsSGD)	-
2 SJ 91	Tos	MOS-P-FET-e	VFET P, 140V, 8A, 120W	I2SK271	23a	TO-3	2SJ114...115, 2SJ118...119, (2SJ55...56) <sup>5</sup>
2 SJ 92	Tos	MOS-P-FET-e	=2SJ91: 7A, 100W	I2SK272	18p	TO-3P	2SJ114...115, 2SJ118...119
2 SJ 96	Hit	MOS-P-FET-e	VFET, 60/20V, 8A, 100W, on<0.8 $\Omega$ , 100/250ns	I2SK286	20d	-	2SJ81...83, (2SJ99...100) <sup>5</sup>
2 SJ 99	Hit	MOS-P-FET-e	VFET, 140/20V, 8A, 100W, on<0.5 $\Omega$ , 100/90ns	I2SK343	20p	-	(2SJ82...83) <sup>5</sup>
2 SJ 100	Hit	MOS-P-FET-e	=2SJ99: 160/20V	I2SK344	20p	-	(2SJ83) <sup>5</sup>
2 SJ 101	Hit	MOS-P-FET-e	VFET, 40/20V, 5A, 30W, on<0.4 $\Omega$ , 60/100ns	I2SK345	17p	TO-220	BUZ 172, IRF 9521, IRF 9523, 2SJ153,++
2 SJ 102	Hit	MOS-P-FET-e	=2SJ101: 60/20V	I2SK346	17p	TO-220	BUZ 172, IRF 9521, IRF 9523, 2SJ153,++
2 SJ 103	Tos	P-FET	Analog-S, 50V, Idss=1.2...14mA, Up=0.3...6V	I2SK246	7e	TO-92	2N5460, 2N5463, 2SJ105
2 SJ 104	Tos	P-FET	Analog-S, 25V, Idss=2.6...20mA, Up=0.2...2V	I2SK364	7a	TO-92	2SJ107...108
2 SJ 105	Tos	P-FET	=2SJ103:	I2SK330	41e	-	2N5460, 2N5463, 2SJ103
2 SJ 106	Tos	P-FET	=2SJ103: SMD	35f	-	SOT-23	-
2 SJ 107	Tos	P-FET	=2SJ104:	I2SK366	41a	-	2SJ104, 2SJ108
2 SJ 108	Tos	P-FET	LF In, MC, 25V, Idss=1...20mA, Up=0.15...2V	I2SK370	41a	-	2N5021, 2SJ74, 2SJ104, 2SJ107
2 SJ 109	Tos	P-FET	Dual, 30V, Idss=2.6...20mA, Up=0.2...2V	I2SK389	7-SOP	(DGSsSGD)	-
2 SJ 110	Tos	P-FET	Analog-S, Uni, 25V, Idss=5...30, Up=0.2...2V	I2SK363	7a	TO-92	2SJ72
2 SJ 111	Tos	P-FET	LF.S, In, 25V, Idss=5...30, Up=0.3...2V	I2SK369	7a	TO-92	2SJ72
2 SJ 112	Hit	MOS-P-FET-e	VFET, 100/20V, 10/15A, 100W, on<0.35 $\Omega$ (5A), 70/160ns	I2SK398	23a	TO-3	2SJ131, 2SJ200
2 SJ 113	Hit	MOS-P-FET-e	=2SJ112:	I2SK399	18p	TO-3P	2SJ131, 2SJ200
2 SJ 114	Hit	MOS-P-FET-e	=2SJ112: 200/20V, 8/12A	I2SK400	18p	TO-3P	-
2 SJ 115	Tos	MOS-P-FET-e	VFET, LF P, 160/20V, 8A, 100W, on<1.4 $\Omega$	I2SK405	18p	TO-3P	2SJ114, 2SJ119
2 SJ 116	Hit	MOS-P-FET-e	VFET, 400/20V, 8A, 125W, on<2.25 $\Omega$ , 60/220ns	23a	-	TO-3	-
2 SJ 117	Hit	MOS-P-FET-e	VFET, 400/20V, 2/4A, 40W, on<7 $\Omega$ (1A), 35/80ns	I2SK310	17p	TO-220	-
2 SJ 118	Hit	MOS-P-FET-e	VFET, 140/20V, 8A, 100W, on<0.5 $\Omega$ (4A), 70/160ns	I2SK413	18p	TO-3P	2SJ114...115
2 SJ 119	Hit	MOS-P-FET-e	=2SJ118: 160/20V	I2SK414	18p	TO-3P	2SJ114...115
2 SJ 120(L.S)	Hit	MOS-P-FET-e	VFET, 40/20V, 2/4A, 10W, <1.5 $\Omega$ (1A), 35/40ns	I2SK416	30p	TO-251,252	2SJ128, 2SJ133, 2SJ191, 2SJ194, 2SJ223
2 SJ 122	Hit	MOS-P-FET-e	VFET, 60/20V, 10A, 50W, on<0.2 $\Omega$ , 80/200ns	I2SK428	17p	TO-220	IRF 9531, IRF 9533, 2SJ136, 2SJ169,++
2 SJ 123	Tos	MOS-P-FET-e	VFET, 70/20V, 10A, 30W, on<0.4 $\Omega$	I2SK442	17p	TO-220	IRF 9530, IRF 9532, 2SJ170, 2SJ138
2 SJ 125	Mit	P-FET	SMD, Uni, 50V, Idss=1...12mA, Up=0.3...6V	35f	-	SOT-23	-
2 SJ 126	Tos	MOS-P-FET-e	VFET, 60/20V, 10A, 40W, on<0.4 $\Omega$ (5A)	17c	-	SOT-186	2SJ137, 2SJ147, 2SJ175, 2SJ236, 2SJ390
2 SJ 127	Hit	MOS-P-FET-e*	VFET, 120/20V, 10/40A, 50W, <0.25 $\Omega$ (5A), 110/240ns	I2SK551	17p	TO-220	IRF 9640, IRF 9641
2 SJ 128(Z)	Nec	MOS-P-FET-e	VFET, 100/20V, $\pm$ 2/8A, 20W, on<1 $\Omega$ (1A), 60/150ns	30p	-	TO-251 Z: TO-252	2SJ194
2 SJ 129	Mat	P-FET	LF Inp, 50V, 20mA, Idss=0.5...14mA, Up=0.2...3V	40e	-	-	2N5021, 2SJ74
2 SJ 130(L.S)	Hit	MOS-P-FET-e*	VFET, 300/20V, 1/2A, 20W, on<8.5 $\Omega$ (0.5A), 35/80ns	30p	-	TO-251,252	-
2 SJ 131	Son	MOS-P-FET-e	VFET, 170/20V, 10A, 100W	I2SK722	18c(p)	TO-3P	2SJ200
2 SJ 132(Z)	Nec	MOS-P-FET-e	VFET, 30/20V, $\pm$ 2/8A, 20W, on<0.4 $\Omega$ (1A), 60/150ns	30p	-	TO-251/252	2SJ120, 2SJ191, 2SJ223, 2SJ326
2 SJ 133(Z)	Nec	MOS-P-FET-e	=2SJ132: 60/20V, on<0.8 $\Omega$ (1A), Z: TO-252	30p	-	TO-251/252	2SJ191, 2SJ223, 2SJ326
2 SJ 134	Nec	MOS-P-FET-e	VFET, 100/20V, $\pm$ 6/24A, 40W, on<0.6 $\Omega$ (3.5A), 45/95ns	17p	-	TO-220	IRF 9630...9633
2 SJ 135	Nec	MOS-P-FET-e	=2SJ134: Iso, $\pm$ 5/20A, 30W	17c	-	SOT-186	2SJ154, 2SJ158, 2SJ272
2 SJ 136	Nec	MOS-P-FET-e	VFET, 60/20V, $\pm$ 12/48A, 40W, <0.3 $\Omega$ (6.5A), 70/165ns	17p	-	TO-220	IRF 9541, IRF 9543, 2SJ140, 2SJ172...03
2 SJ 137	Nec	MOS-P-FET-e	=2SJ136: Iso, $\pm$ 10/40A, 30W	17c	-	SOT-186	2SJ147, 2SJ175, 2SJ236
2 SJ 138	Nec	MOS-P-FET-e	VFET, 100/20V, $\pm$ 12/48A, 60W, <0.3 $\Omega$ (6.5A), 85/155ns	17p	-	TO-220	IRF 9540, IRF 9542, 2SJ127
2 SJ 139	Nec	MOS-P-FET-e	=2SJ138: Iso, $\pm$ 10/40A, 35W	17c	-	SOT-186	2SJ274
2 SJ 140	Nec	MOS-P-FET-e	VFET, 60/20V, $\pm$ 19/76A, 60W, <0.2 $\Omega$ (10A), 180/170ns	17p	-	TO-220	2SJ174, 2SJ221, 2SJ291, 2SJ328
2 SJ 141	Nec	MOS-P-FET-e	=2SJ140: Iso, $\pm$ 13/52A, 35W	17c	-	SOT-186	2SJ176, 2SJ237, 2SJ293, 2SJ321, 2SJ329
2 SJ 142	Nec	MOS-P-FET-e	VFET, 100/20V, $\pm$ 13/52A, 35W, <0.2 $\Omega$ (10A), 120/190ns	17c	-	SOT-186	2SJ222
2 SJ 143	Nec	MOS-P-FET-e	VFET, 60/20V, $\pm$ 16/64A, 35W, <0.15 $\Omega$ (10A), 190/180ns	17c	-	SOT-186	2SJ176...177, 2SJ240, 2SJ293, 2SJ329,++
2 SJ 144	Tos	P-FET	SMD, Analog-S, 50V, Idss=1.2...14mA, Up=0.3...6V	35f(2mm)	-	SOT-323	-
2 SJ 145	Mit	P-FET	=2SJ125:	35f(2mm)	-	SOT-323	-
2 SJ 146	Mat	MOS-P-FET-e	SMD, S, 50/8V, 0.1/0.2A, on<150 $\Omega$ (10mA), <40/60ns	35a	-	SOT-23	BSS 84, 2SJ185, 2SJ209...210
2 SJ 147	Tos	MOS-P-FET-e	VFET, 60/20V, 12/48A, 40W, on<0.2 $\Omega$ (6A), 65/160ns	17c	-	SOT-186	2SJ141, 2SJ175...176, 2SJ265, 2SJ303,++
2 SJ 148	Tos	MOS-P-FET-e	Interface.S, 60/20V, 0.2/0.8A, 0.4W, on<2 $\Omega$ (50mA)	7c	-	TO-92	BST 100
2 SJ 151	Nec	MOS-P-FET-e*	VFET, 100/15V, $\pm$ 3/6A, 35W, on<1.2 $\Omega$ (1.5A), 30/70ns	17p	-	TO-220	IRF 9510, IRF 9620...9623
2 SJ 152	Nec	MOS-P-FET-e*	=2SJ151: Iso, 30W	17c	-	SOT-186	2SJ135, 2SJ157...159, 2SJ272
2 SJ 153	Nec	MOS-P-FET-e*	VFET, 60/15V, $\pm$ 6/12A, 40W, on<0.6 $\Omega$ (3.5A), 60/95ns	17p	-	TO-220	2SJ122...123
2 SJ 154	Nec	MOS-P-FET-e*	=2SJ153: Iso, $\pm$ 5/10A, 30W	17c	-	SOT-186	2SJ137, 2SJ147, 2SJ175, 2SJ263, 2SJ390,++
2 SJ 155	Mat	MOS-P-FET-e	VFET, 50/20V, 3A, 30W, <0.65 $\Omega$ (2A)	17c	-	SOT-186	2SJ152
2 SJ 156	Mat	MOS-P-FET-e	VFET, 50/20V, 5A, 30W, on<0.22 $\Omega$ (3A)	17c	-	SOT-186	2SJ135, 2SJ154, 2SJ272
2 SJ 157	Mat	MOS-P-FET-e	VFET, 100/20V, 3A, 30W, on<1.6 $\Omega$ (2A)	17c	-	SOT-186	2SJ135, 2SJ152, 2SJ272
2 SJ 158	Mat	MOS-P-FET-e	VFET, 100/20V, 5A, 30W, on<0.55 $\Omega$ (3A)	17c	-	SOT-186	2SJ135, 2SJ154, 2SJ272
2 SJ 159	Mat	MOS-P-FET-e	VFET, 160/20V, 3A, 30W, on<1 $\Omega$ (2A)	17c	-	SOT-186	2SJ306
2 SJ 160	Hit	MOS-P-FET-e*	VFET, 120/15V, 7A, 100W, 230/110ns	I2SK1056	18d,p(?)	TO-3P	(2SJ115, 2SJ118...119)
2 SJ 161	Hit	MOS-P-FET-e*	=2SJ160: 140/15V	I2SK1057	18d,p(?)	TO-3P	(2SJ115, 2SJ118...119)
2 SJ 162	Hit	MOS-P-FET-e*	=2SJ160: 160/15V	I2SK1058	18d,p(?)	TO-3P	(2SJ115, 2SJ119)
2 SJ 163	Mat	P-FET	=2SJ164: SMD	35f	-	SOT-23	-
2 SJ 164	Mat	P-FET	65V, 20mA, Idss=0.2...6mA, Up=1.5...3.5V	I2SK1104	40a	-	2N5020
2 SJ 165	Nec	MOS-P-FET-e*	VFET, 50V, $\pm$ 0.1/0.2A, <50 $\Omega$ (20mA), 98/124ns	I2SK1132	40c	(SST)	BSS 110, 2SJ148, 2SJ184
2 SJ 166	Nec	MOS-P-FET-e*	=2SJ165: SMD	I2SK1133	35a	SOT-23	BSS 84, 2SJ185, 2SJ210
2 SJ 167	Tos	MOS-P-FET-e	=2SJ148: 0.3W	I2SK1061	41c	-	BST 100
2 SJ 168	Tos	MOS-P-FET-e	=2SJ148: SMD	I2SK1062	35a	SOT-23	2SJ209...211
2 SJ 169	Hit	MOS-P-FET-e	VFET, 60/20V, 12A, 50W, on<0.35 $\Omega$ (6.5A), 122/100ns	17p	-	TO-220	IRF 9531, 2SJ122...123, 2SJ172
2 SJ 170	Hit	MOS-P-FET-e	VFET, 80/20V, 12A, 50W, on<0.35 $\Omega$ (6.5A), 122/100ns	17p	-	TO-220	2SJ127, 2SJ138
2 SJ 171	Hit	MOS-P-FET-e	VFET, 50/20V, 9.7A, 40W, on<0.28 $\Omega$ (5.6A), 212/70ns	17p	-	TO-220	BUZ 171, 2SJ122...123, 2SJ136, 2SJ172

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SJ 172	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 40W, <0.18 $\Omega$ (5A), 73/275ns	17p		TO-220	2SJ290, 2SJ302
2 SJ 173	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 50W, <0.11 $\Omega$ (8A), 135/380ns	17p		TO-220	2SJ221, 2SJ290, 2SJ302
2 SJ 174	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 20/80A, 75W, <0.085 $\Omega$ (10A), 140/580ns	17p		TO-220	2SJ221, 2SJ291, 2SK328
2 SJ 175	Hit	MOS-P-FET-e*	=2SJ172: Iso, 25W	17c		SOT-186	2SJ236, 2SJ390
2 SJ 176	Hit	MOS-P-FET-e*	=2SJ173: Iso, 30W	17c		SOT-186	2SJ293, 2SJ303, 2SJ321, 2SJ329
2 SJ 177	Hit	MOS-P-FET-e*	=2SJ174: Iso, 35W	17c		SOT-186	2SJ294, 2SJ322, 2SJ330, 2SJ374
2 SJ 178	Nec	MOS-P-FET-e*	VFET, S, 30/20V, $\pm$ 1/2A, 0.75W, <1 $\Omega$ (0.5A), 105/580ns	7b		TO-92	2SJ196
2 SJ 179	Nec	MOS-P-FET-e*	=2SJ178: SMD, $\pm$ 1.5/3A	39b		SOT-89	2SJ190, 2SJ193, 2SJ197, 2SJ238
2 SJ 180	Nec	MOS-P-FET-e*	=2SJ178: 1W	9c		(SP-8)	2SJ196
2 SJ 181(L,S)	Hit	MOS-P-FET-e*	VFET, 600/15V, 0.5/1A, 20W, 15<25 $\Omega$ (0.3A), 27/70ns	30p		L: TO-251 S: TO-252	-
			(2SK1327)				
2 SJ 182(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 3/12A, 20W, <0.4 $\Omega$ (2A), 35/245ns	30p		L: TO-251 S: TO-252	2SJ192, 2SJ235, 2SJ327
2 SJ 183	Tos	MOS-P-FET-e*	VFET, 60/20V, 5/20A, 20W, <0.35 $\Omega$ (2.5A), 50/120ns	30p		TO-251/252	2SJ192, 2SJ239, 2SJ245, 2SK279, 2SJ327
2 SJ 184	Nec	MOS-P-FET-e*	VFET, S, 50/7V, $\pm$ 0.1/0.2A, 0.25W, on<40 $\Omega$ (1mA)	40c		(SST)	BSS 110, 2SJ148
			310/110ns				
			(2SK1398)				
2 SJ 185	Nec	MOS-P-FET-e*	=2SJ184: SMD	35a		SOT-23	BSS 84, 2SJ210
2 SJ 186	Hit	MOS-P-FET-e*	VFET, 200/15V, 0.5/1A, <12 $\Omega$ (0.25A), 12/32ns	39b		SOT-89	-
			(2SK1334)				
2 SJ 187	Say	MOS-P-FET-e*	SMD, VFET, LogL, 30/15V, 1/4A, <0.75 $\Omega$ (0.5A), 23/100ns	39b		SOT-89	2SJ190, 2SJ278
2 SJ 188	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 2/8A, 20W, <0.3 $\Omega$ (1A), 37/180ns	30c		TO-251/252	2SJ191, 2SJ194, 2SJ326
2 SJ 189	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 4/16A, 30W, <0.12 $\Omega$ (2A), 65/290ns	30c		TO-251/252	2SJ192, 2SJ245, 2SJ279, 2SJ327
2 SJ 190	Say	MOS-P-FET-e*	SMD, VFET, LogL, 60/15V, 1/4A, <1.2 $\Omega$ (0.5A), 23/100ns	39b		SOT-89	2SJ193, 2SJ278
2 SJ 191	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 2/8A, 20W, <0.45 $\Omega$ (1A), 30/140ns	30c		TO-251/252	2SJ235, 2SJ326
2 SJ 192	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 4/16A, 30W, <0.2 $\Omega$ (2A), 50/210ns	30c		TO-251/252	2SJ245, 2SJ279, 2SJ327
2 SJ 193	Say	MOS-P-FET-e*	SMD, VFET, LogL, 100/15V, 1/4A, <2.4 $\Omega$ (0.5A), 23/100ns	39b		SOT-89	-
2 SJ 194	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 2/8A, 20W, <0.95 $\Omega$ (1A), 26/115ns	30c		TO-251/252	2SJ195
2 SJ 195	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 4/16A, 30W, <0.4 $\Omega$ (2A), 40/160ns	30c		TO-251/252	-
2 SJ 196	Nec	MOS-P-FET-e*	VFET, 60/20V, $\pm$ 1/2A, 0.75W, <1 $\Omega$ (0.5A), 115/550ns	7b		TO-92	2SJ353
			(2SK1482)				
2 SJ 197	Nec	MOS-P-FET-e*	=2SJ196: SMD	39b		SOT-89	2SJ190, 2SJ238, 2SJ278
2 SJ 198	Nec	MOS-P-FET-e*	VFET, 100/20V, $\pm$ 0.5/1A, 0.75W, <2 $\Omega$ (0.5A), 81/450ns	7b		TO-92	2SJ231
			(2SK1484)				
2 SJ 199	Nec	MOS-P-FET-e*	=2SJ198: SMD	39b		SOT-89	2SJ213
2 SJ 200	Tos	MOS-P-FET-e*	VFET, LF Out, 180/20V, 10A, 120W	18p		TO-3P	-
2 SJ 201	Tos	MOS-P-FET-e*	VFET, LF Out, 200V, 12A, 150W	77p		TOP-3L	-
2 SJ 202	Nec	MOS-P-FET-e*	SMD, VFET, 16/7V, $\pm$ 0.1/0.2A, <30 $\Omega$ (1mA), 100/160ns	35a(2mm)		SOT-323	-
			(2SK1580)				
2 SJ 203	Nec	MOS-P-FET-e*	SMD, VFET, 16/7V, $\pm$ 0.2/0.4A, <10 $\Omega$ (1mA), 600/300ns	35a		SOT-23	BSS 84, 2SJ185, 2SJ210
			(2SK1581)				
2 SJ 204	Nec	MOS-P-FET-e*	SMD, VFET, 30/20V, $\pm$ 0.2A, on<8 $\Omega$ (10mA), 360/345ns	35a		SOT-23	BSS 84, 2SJ185, 2SJ210
			(2SK1582)				
2 SJ 205	Nec	MOS-P-FET-e*	SMD, VFET, 16/16V, $\pm$ 0.5/1A, <3 $\Omega$ (0.3A), 1085/175ns	39b		SOT-89	2SJ212, 2SJ288
2 SJ 206	Nec	MOS-P-FET-e*	SMD, VFET, 30/16V, $\pm$ 0.5/1A, <3 $\Omega$ (0.3A), 540/215ns	39b		SOT-89	2SJ212, 2SJ288
2 SJ 207	Nec	MOS-P-FET-e*	SMD, VFET, 16/16V, $\pm$ 1/2A, <1.5 $\Omega$ (0.5A), 680/370ns	39b		SOT-89	2SJ190, 2SJ197, 2SJ238, 2SJ278
2 SJ 208	Nec	MOS-P-FET-e*	SMD, VFET, 16/16V, $\pm$ 2/4A, on<1 $\Omega$ (1A), 715/430ns	39b		SOT-89	2SJ356
2 SJ 209	Nec	MOS-P-FET-e*	SMD, VFET, 100/16V, $\pm$ 0.1/0.2A, <60 $\Omega$ (10mA), 120/105ns	35a		SOT-23	2SJ211
2 SJ 210	Nec	MOS-P-FET-e*	SMD, VFET, 60/20V, $\pm$ 0.2/0.4A, <10 $\Omega$ (10mA), 310/330ns	35a		SOT-23	BSS 84, 2SJ185
2 SJ 211	Nec	MOS-P-FET-e*	SMD, VFET, 100/20V, $\pm$ 0.2/0.4A, <20 $\Omega$ (10mA), 260/310ns	35a		SOT-23	-
2 SJ 212	Nec	MOS-P-FET-e*	SMD, VFET, 60/20V, $\pm$ 0.5/1A, <3 $\Omega$ (0.5A), 510/235ns	39b		SOT-89	2SJ199, 2SJ213, 2SJ288
2 SJ 213	Nec	MOS-P-FET-e*	SMD, VFET, 100/20V, $\pm$ 0.5/1A, <4.2 $\Omega$ (0.3A), 430/230ns	39b		SOT-89	2SJ186, 2SJ193, 2SJ199
2 SJ 214(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 40W, <0.18 $\Omega$ (5A), 73/275ns	30p		(TO-220MF)	2SJ219, 2SJ296
2 SJ 215	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 35/140A, 125W, on<0.06 $\Omega$ (18A)	18p		TO-3P	2SJ217, 2SJ331
2 SJ 216	Hit	MOS-P-FET-e*	=2SJ215: Iso, 50W	=18c		(TO-3PFM)	2SJ218
2 SJ 217	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 45/180A, 150W, on<0.042 $\Omega$ (20A)	18p		TO-3P	-
2 SJ 218	Hit	MOS-P-FET-e*	=2SJ217: Iso, 60W	=18c		(TO-3PFM)	-
2 SJ 219(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 50W, on<0.11 $\Omega$ (8A)	30p		(TO-220MF)	2SJ268, 2SJ296, 2SJ384
2 SJ 220(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 20/80A, 75W, on<0.085 $\Omega$ (10A)	30p		(TO-220MF)	2SJ297, 2SJ409
2 SJ 221	Hit	MOS-P-FET-e*	VFET, LogL, 100/20V, 20/80A, 75W, on<0.16 $\Omega$ (10A)	17p		TO-220	-
2 SJ 222	Hit	MOS-P-FET-e*	=2SJ221: Iso, 15/60A, 35W	17c		SOT-186	-
2 SJ 223(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 2/8A, 10W, <0.7 $\Omega$ (1A), 24/140ns	30p		TO-251, 252	2SJ191, 2SJ326
2 SJ 224	Tos	MOS-P-FET-e*	VFET, 60/20V, 12/48A, 80W, on<0.2 $\Omega$ (6A), 65/160ns	30p		(TO-220MF)	2SJ219, 2SJ296
2 SJ 225	Say	MOS-P-FET-e*	VFET, 30/15V, 1/4A, 1W, on<0.75 $\Omega$ (0.5A), 23/100ns	9c		(NMP)	2SJ196, 2SJ353
2 SJ 226	Say	MOS-P-FET-e*	VFET, 30/15V, 2/5A, 1.5W, on<0.3 $\Omega$ (1A), 37/180ns	=12b		(FLP)	-
2 SJ 227	Say	MOS-P-FET-e*	VFET, 30/15V, 3/12A, 1.5W, <0.13 $\Omega$ (1.5A), 60/305ns	=12b		(FLP)	-
2 SJ 228	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 0.8/3.2A, 1W, on<1.2 $\Omega$ (0.4A)	9c		(NMP)	2SJ353
2 SJ 229	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 1.6/6.4A, 1.5W, on<0.45 $\Omega$ (0.8A)	=12b		(FLP)	-
2 SJ 230	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 2.5/10A, 1.5W, on<0.21 $\Omega$ (1.5A)	=12b		(FLP)	-
2 SJ 231	Say	MOS-P-FET-e*	VFET, 100/15V, 0.5/2A, 1W, <2.4 $\Omega$ (0.25A), 22/120ns	9c		(NMP)	-
2 SJ 232	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 1.2/4.8A, 1.5W, <0.95 $\Omega$ (0.6A)	=12b		(FLP)	-
2 SJ 233	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 1.8/7.2A, 1.5W, on<0.4 $\Omega$ (1A)	=12b		(FLP)	-
2 SJ 234(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 30/20V, 2.5/10A, 10W, on<0.4 $\Omega$ (1.5A)	30p		L: TO-251 S: TO-252	2SJ191, 2SJ326
			32/157ns				
2 SJ 235(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 3/12A, 20W, on<0.4 $\Omega$ (2A)	30p		L: TO-251 S: TO-252	2SJ182
			4.2/24 $\mu$ s				
2 SJ 236	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 25W, on<0.18 $\Omega$ (5A)	17c		SOT-186	2SJ176, 2SJ390
2 SJ 237	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 30W, on<0.11 $\Omega$ (8A)	17c		SOT-186	2SJ177, 2SJ265, 2SJ293, 2SJ329
2 SJ 238	Tos	MOS-P-FET-e*	SMD, VFET, 60/20V, 1/3A, <0.85 $\Omega$ (0.5A), 90/80ns	39b		SOT-89	2SJ190, 2SJ193, 2SJ197
2 SJ 239	Tos	MOS-P-FET-e*	VFET, 60/20V, 5/20A, 20W, <0.25 $\Omega$ (2.5A), 130/200ns	30p		TO-251	2SJ183, 2SJ192, 2SJ195
2 SJ 240	Tos	MOS-P-FET-e*	VFET, 60/20V, 20/80A, 45W, <0.045 $\Omega$ (10A), 50/180ns	17c		SOT-186	2SJ177, 2SJ294, 2SJ322
2 SJ 241	Tos	MOS-P-FET-e*	=2SJ240: 100W	30p		(TO-220MF)	-
2 SJ 243	Nec	MOS-P-FET-e*	SMD, VFET, 30/7V, $\pm$ 0.1/0.2A, on<25 $\Omega$ (10mA)	35(1.6mm)		SS Mini	-
2 SJ 244	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 12/V, $\pm$ 2/4A, on<0.9 $\Omega$ (0.5A)	39b		SOT-89	2SJ317
2 SJ 245(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 5/20A, 20W, <0.25 $\Omega$ (3A), 57/260ns	30p		TO-251, 252	2SJ192, 2SJ279, 2SJ327
2 SJ 246(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 30/20V, 7/28A, 20W, <0.17 $\Omega$ (4A), 65/270ns	30p		TO-251, 252	2SJ333, 2SJ389
2 SJ 247	Hit	MOS-P-FET-e*	VFET, LogL, 100/20V, 8/32A, 40W, <0.3 $\Omega$ (4A), 59/225ns	17p		TO-220	-
2 SJ 248	Hit	MOS-P-FET-e*	=2SJ247: Iso, 25W	17c		SOT-186	2SJ350
2 SJ 250	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 12W, <0.19 $\Omega$ (5A), 73/275ns	14b		TO-126 Iso	-
2 SJ 251	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 10/40A, 50W, on<0.12 $\Omega$	17p		TO-220	2SJ172
2 SJ 252	Say	MOS-P-FET-e*	VFET, LogL, 30/25V, 12/48A, 60W, on<95m $\Omega$	17p		TO-220	2SJ173, 2SJ290
2 SJ 253	Say	MOS-P-FET-e*	VFET, LogL, 30/25V, 20/80A, 70W, on<55m $\Omega$	17p		TO-220	2SJ174, 2SJ291, 2SJ328
2 SJ 254	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 8/32A, 25W, on<0.12 $\Omega$ (5A)	17c		TO-220 Iso	2SJ175, 2SJ236, 2SJ390
2 SJ 255	Say	MOS-P-FET-e*	VFET, LogL, 30/20V, 10/40A, 25W, on<95m $\Omega$ (6A)	17c		TO-220 Iso	2SJ175, 2SJ236, 2SJ390
2 SJ 256	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 18/72A, 30W, on<55m $\Omega$ (10A)	17c		TO-220 Iso	2SJ177, 2SJ294, 2SJ322, 2SJ330, 2SJ374

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SJ 257	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 10/40A, 50W, on<0,12Ω(5A)	30p	(TO-220MF)		2SJ214, 2SJ277
2 SJ 258	Say	MOS-P-FET-e*	VFET, LogL, 30/20V, 12/48A, 60W, on<95mΩ(6A)	30p	(TO-220MF)		2SJ214, 2SJ277
2 SJ 259	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 20/80A, 70W, on<55mΩ(10A)	30p	(TO-220MF)		2SJ409
2 SJ 260	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 8/32A, 50W, on<0,21Ω	17p	TO-220		2SJ172
2 SJ 261	Say	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 60W, on<0,15Ω	17p	TO-220		2SJ172
2 SJ 262	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 18/72A, 70W, on<0,08Ω	17p	TO-220		2SJ174, 2SJ291, 2SJ328
2 SJ 263	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 6/24A, 25W, on<0,21Ω(4A)	17c	TO-220 Iso		2SJ175, 2SJ236, 2SJ390
2 SJ 264	Say	MOS-P-FET-e*	VFET, LogL, 60/20V, 8/32A, 25W, on<0,15Ω(5A)	17c	TO-220 Iso		2SJ175, 2SJ236, 2SJ390
2 SJ 265	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 15/60A, 30W, on<0,11Ω(9A)	17c	TO-220 Iso		2SJ176, 2SJ237, 2SJ293, 2SJ329
2 SJ 266	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 8/32A, 50W, on<0,21Ω(4A)	30p	(TO-220MF)		2SJ214, 2SJ277
2 SJ 267	Say	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 60W, on<0,15Ω(5A)	30p	(TO-220MF)		2SJ214, 2SJ277
2 SJ 268	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 18/72A, 70W, on<0,08Ω(9A)	30p	(TO-220MF)		2SJ409
2 SJ 269	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 6/24A, 50W, on<0,4Ω	17p	TO-220		-
2 SJ 270	Say	MOS-P-FET-e*	VFET, LogL, 100/20V, 8/32A, 60W, on<0,3Ω	17p	TO-220		2SJ247
2 SJ 271	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 15/60A, 70W, on<0,16Ω	17p	TO-220		2SJ221
2 SJ 272	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 4/16A, 25W, on<0,4Ω(3A)	17c	TO-220 Iso		2SJ248
2 SJ 273	Say	MOS-P-FET-e*	VFET, LogL, 100/20V, 6/24A, 25W, on<0,3Ω(4A)	17c	TO-220 Iso		2SJ248, 2SJ350
2 SJ 274	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 12/48A, 30W, on<0,16Ω(8A)	17c	TO-220 Iso		2SJ222
2 SJ 275	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 6/24A, 50W, on<0,4Ω(3A)	30p	(TO-220MF)		-
2 SJ 276	Say	MOS-P-FET-e*	VFET, LogL, 100/20V, 8/32A, 50W, on<0,3Ω(4A)	30p	(TO-220MF)		-
2 SJ 277	Say	MOS-P-FET-e*	VFET, LogL, 100/15V, 15/60A, 70W, on<0,16Ω(8A)	30p	(TO-220MF)		2SJ409
2 SJ 278	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 60/20V, 1/4A, <0,83Ω(0,5A), 15/55ns	39b	SOT-89		-
2 SJ 279(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 5/20A, 20W, <0,2Ω(3A), 50/200ns	30p	TO-251,252		2SJ245
2 SJ 280(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 35/120A, 75W, on<0,04Ω(15A)	30p	(TO-220MF)		-
2 SJ 281	Say	MOS-P-FET-e*	VFET, LogL, 250V, 3A, 30W, on<2,6Ω	30p	TO-251		-
2 SJ 282	Say	MOS-P-FET-e*	VFET, LogL, 250/30V, 3/12A, 50W, on<2Ω	17p	TO-220		-
2 SJ 284	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 0,3/0,5A, <2,2Ω(0,15A), 17/70ns	35a	SOT-23		-
2 SJ 285	Say	MOS-P-FET-e*	VFET, LogL, 60/15V, 0,25/0,4A, <3Ω(0,15A), 17/75ns	35a	SOT-23		2SJ210...211
2 SJ 286	Say	MOS-P-FET-e*	VFET, LogL, 100V, 0,15/0,25A, on<7Ω	35a	SOT-23		2SJ209, 2SJ211
2 SJ 287	Say	MOS-P-FET-e*	VFET, LogL, 30/15V, 0,5/2A, on<2,2Ω(0,25A), 17/55ns	39b	SOT-89		2SJ190, 2SJ278
2 SJ 288	Say	MOS-P-FET-e*	SMD, VFET, LogL, 60/15V, 0,5/2A, <3Ω(0,25A), 17/55ns	39b	SOT-89		2SJ190, 2SJ278
2 SJ 289	Say	MOS-P-FET-e*	VFET, LogL, 100V, 0,5/1A, on<7,5Ω	39b	SOT-89		2SJ193
2 SJ 290	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 50W, on<95mΩ(8A)	17p	TO-220		2SJ173, 2SJ221
2 SJ 291	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 20/80A, 60W, on<65mΩ(10A)	17p	TO-220		2SJ174, 2SJ221
2 SJ 292	Hit	MOS-P-FET-e*	=2SJ280:	17p	TO-220		-
2 SJ 293	Hit	MOS-P-FET-e*	=2SJ290: Iso, 30W	17c	SOT-186		2SJ176, 2SJ321
2 SJ 294	Hit	MOS-P-FET-e*	=2SJ291: Iso, 35W	17c	SOT-186		2SJ177, 2SJ322
2 SJ 295	Hit	MOS-P-FET-e*	=2SJ280: Iso, 35W	17c	SOT-186		2SJ323
2 SJ 296(L,S)	Hit	MOS-P-FET-e*	=2SJ290:	-30p	(TO-220MF)		2SJ219
2 SJ 297(L,S)	Hit	MOS-P-FET-e*	=2SJ290:	30p	(TO-220MF)		2SJ220
2 SJ 298	Hit	MOS-P-FET-e*	VFET, LogL, 20/20V, 5/20A, 12W, <0,12Ω(3A), 90/190ns	14b	TO-126		2SJ250
2 SJ 299	Hit	MOS-P-FET-e*	=2SJ298:	30p	TO-251,252		2SJ245, 2SJ279, 2SJ318
2 SJ 300	Hit	MOS-P-FET-e*	VFET, LogL, 20/20V, 10/40A, 12W, <0,08Ω(5A), 146/335ns	14b	TO-126 Iso		2SJ250
2 SJ 302	Nec	MOS-P-FET-e*	VFET, 60/20V, 16/64A, 75W, on<0,1Ω(8A), 200/280ns	17p	TO-220		2SJ173, 2SJ221, 2SJ290
2 SJ 302 Z		MOS-P-FET-e*	=2SJ302:	30p	(TO-220MF)		2SJ268, 2SJ384
2 SJ 303	Nec	MOS-P-FET-e*	VFET, 60/20V, 14/56A, 35W, on<0,1Ω(7A), 140/280ns	17c	TO-220 Iso		2SJ143, 2SJ176, 2SJ265, 2SJ304, 2SJ329
2 SJ 304	Tos	MOS-P-FET-e*	VFET, LogL, 60/20V, 14A, 40W, <0,12Ω(7A), 30/100ns	17c	TO-220 Iso		2SJ176, 2SJ265, 2SJ303, 2SJ329
2 SJ 305	Say	MOS-P-FET-e*	VFET, 30/20V, 0,2A, <4Ω(0,05A), 60/150ns	35a	SOT-23		2SJ210...211
2 SJ 306	Say	MOS-P-FET-e*	VFET, 250/30V, 3/12A, 25W, on<2Ω(1,5A), 32/140ns	17c	TO-220 Iso		2SJ307
2 SJ 307	Say	MOS-P-FET-e*	VFET, 250/30V, 6/24A, 30W, on<3Ω(3A), 61/285ns	17c	TO-220 Iso		2SJ308, 2SJ320
2 SJ 308	Say	MOS-P-FET-e*	VFET, 250/30V, 9/36A, 40W, on<0,48Ω(5A), 115/580ns	17c	TO-220 Iso		-
2 SJ 312	Tos	MOS-P-FET-e*	=2SJ304:	30p	(TO-220MF)		2SJ268, 2SJ384
2 SJ 313	Tos	MOS-P-FET-e*	V-MOS, LogL, 180/20V, 1A	17c	SOT-186		-
2 SJ 314-01(L,S)	Fjd	MOS-P-FET-e*	VFET, LogL, 60/20V, 5A, 20W, <0,03Ω(2,5A), 35/180ns	30p	TO-251,252		2SJ192, 2SJ245, 2SJ279, 2SJ327
2 SJ 315	Tos	MOS-P-FET-e*	VFET, LogL, 60/20V, 5A, 20W, <0,25Ω(2,5A), 30/140ns	30p	TO-251,252		2SJ192, 2SJ245, 2SJ279, 2SJ327
2 SJ 316	Tos	MOS-P-FET-e*	VFET, LogL, 12/15V, 1/4A, <0,42Ω(0,5A), 24/110ns	39b	SOT-89		2SJ190, 2SJ278
2 SJ 317	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 12/7V, ±2/4A, <0,7Ω(0,5A)	39b	SOT-89		2SJ244
2 SJ 318(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 20/20V, 5/20A, 20W, <0,13Ω(3A), 70/150ns	30p	TO-251,252		2SJ245, 2SJ279, 2SJ299
2 SJ 319(L,S)	Hit	MOS-P-FET-e*	VFET, 200/20V, 3/12A, 20W, on<2,3Ω(2A), 40/70ns	30p	TO-251,252		-
2 SJ 320	Say	MOS-P-FET-e*	VFET, LogL, 250/30V, 4/16A, 25W, <1,3Ω(2A), 40/175ns	17c	TO-220 Iso		-
2 SJ 321	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 30W, on<95mΩ(8A)	17c	TO-220 Iso		2SJ176, 2SJ237, 2SJ265, 2SJ293, 2SJ329
2 SJ 322	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 20/80A, 35W, on<65mΩ(10A)	17c	TO-220 Iso		2SJ177, 2SJ294, 2SJ330
2 SJ 323	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 30/120A, 35W, on<43mΩ(15A)	17c	TO-220 Iso		2SJ295, 2SJ334
2 SJ 324(Z)	Nec	MOS-P-FET-e*	VFET, LogL, 30/20V, ±2/8A, 20W, on<0,25Ω(1A)	30p	TO-251		2SJ191, 2SJ326
			42/70ns		Z: TO-252		
2 SJ 325(Z)	Nec	MOS-P-FET-e*	VFET, LogL, 30/20V, ±4/16A, 20W, on<0,11Ω(2A)	30p	TO-251		2SJ192, 2SJ245, 2SJ279, 2SJ327
			80/145ns		Z: TO-252		
2 SJ 326(Z)	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±2/8A, 20W, on<0,37Ω(1A)	30p	TO-251		2SJ191, 2SJ194
			20/65ns		Z: TO-252		
2 SJ 327(Z)	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±4/16A, 20W, on<0,17Ω(2A)	30p	TO-251		2SJ192, 2SJ195, 2SJ245, 2SJ279
			45/130ns		Z: TO-252		
2 SJ 328	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±20/80A, 60W, on<65mΩ(10A)	17p	TO-220		2SJ174, 2SJ221, 2SJ291
2 SJ 328 Z		MOS-P-FET-e*	=2SJ328:	30p	(TO-220MF)		2SJ409
2 SJ 329	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±15/60A, 35W, on<0,06Ω(8A)	17c	TO-220 Iso		2SJ176, 2SJ237, 2SJ265, 2SJ293, 2SJ321
2 SJ 330	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±20/80A, 35W, on<0,05Ω(10A)	17c	TO-220 Iso		2SJ177, 2SJ294, 2SJ322, 2SJ374
2 SJ 331	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, ±30/120A, 150W, on<0,03Ω(15A)	18p	TO-3P		2SJ215, 2SJ217
2 SJ 332(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 20/20V, 10A, 20W, <0,08Ω(5A), 123/200ns	30p	TO-251,252		2SJ389
2 SJ 333(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 30/20V, 7/28A, 20W, <0,14Ω(4A), 62/240ns	30p	TO-251,252		2SJ246
2 SJ 334	Tos	MOS-P-FET-e*	VFET, LogL, 60/20V, 30A, 45W, <38mΩ(15A), 25/130ns	17c	TO-220 Iso		2SJ295, 2SJ323
2 SJ 335	Say	MOS-P-FET-e*	SMD, VFET, LogL, 12/15V, 0,5A, on<1,4Ω	39b	SOT-89		2SJ190, 2SJ278, 2SJ288
2 SJ 336	Say	MOS-P-FET-e*	VFET, LogL, 12/18V, 2A, 20W, on<0,21Ω	30p	TO-251		2SJ191, 2SJ326
2 SJ 337	Say	MOS-P-FET-e*	VFET, LogL, 12/18V, 8A, 30W, on<0,09Ω(4A)	30p	TO-251		2SJ246, 2SJ333, 2SJ389
2 SJ 339	Say	MOS-P-FET-e*	VFET, LogL, 60/20V, 25/100A, 40W, <40mΩ	17c	TO-220 Iso		2SJ295, 2SJ323, 2SJ334
2 SJ 340	Say	MOS-P-FET-e*	VFET, LogL, 60/20V, 25/120A, 70W, <40mΩ	30p	(TO-220MF)		2SJ280
2 SJ 341	Hit	MOS-P-FET-e*	VFET, LogL, 20/20V, 5/20A, 12W, <0,12Ω(3A), 70/150ns	14b	TO-126 Iso		2SJ250, 2SJ300
2 SJ 342	Tos	MOS-P-FET-e*	VFET, int.Di(G -S), 50/7V, 0,05A, 0,3W, <50Ω(10mA)	41f			-
			150/130ns		(2SK1825		
2 SJ 343	Tos	MOS-P-FET-e*	=2SJ342: SMD	35a	SOT-23		-
2 SJ 344	Tos	MOS-P-FET-e*	=2SJ342: SMD	(2SK1827	35a(2mm)	SOT-323	-
2 SJ 345	Tos	MOS-P-FET-e*	SMD, VFET, int.Di(G +S), 20/7V, 0,05A, <40Ω(10mA)	35a	SOT-23		-
			150/130ns		(2SK1828		
2 SJ 346	Tos	MOS-P-FET-e*	=2SJ345:	(2SK1829	35a(2mm)	SOT-323	-
2 SJ 347	Tos	MOS-P-FET-e*	=2SJ345:	(2SK1830	35a(1,6mm)	SS Mini	-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SJ 348	Say	MOS-P-FET-e	VFET, LogL, 60/20V, 30/120A, 70W, on<0.04 $\Omega$	17p		TO-220	2SJ292
2 SJ 349	Tos	MOS-P-FET-e*	VFET, LogL, 60/20V, 20A, 35W, <45m $\Omega$ (10A), 35/120ns	17c		TO-220 Iso	2SJ177, 2SJ294, 2SJ322, 2SJ330, 2SJ374
2 SJ 350	Hit	MOS-P-FET-e*	VFET, LogL, 120/20V, 6/12A, 20W, <0.7 $\Omega$ (4A), 56/250ns	17c		SOT-186	-
2 SJ 351	Hit	MOS-P-FET-e*	VFET, LF Out, 180/20V, 8A, 100W, 250/90ns	{2SK2220		TO-3P	-
2 SJ 352	Hit	MOS-P-FET-e*	=2SJ351: 200/20V	{2SK2221		TO-3P	-
2 SJ 353	Nec	MOS-P-FET-e*	VFET, LogL, 60/20V, $\pm$ 1.5/3A, 1W, on<0.7 $\Omega$ (1A)	9c		(SP-8)	-
2 SJ 355	Nec	MOS-P-FET-e*	SMD, VFET, LogL, 30/20V, $\pm$ 2/4A, on<0.35 $\Omega$ (1A)	39b		SOT-89	2SJ356, 2SJ363
2 SJ 356	Nec	MOS-P-FET-e*	SMD, VFET, LogL, 60/20V, $\pm$ 2/4A, on<0.5 $\Omega$ (1A)	39b		SOT-89	-
2 SJ 357	Nec	MOS-P-FET-e*	SMD, VFET, LogL, 30/20V, $\pm$ 3/6A, on<0.2 $\Omega$ (1.5A)	39b		SOT-89	2SJ358
2 SJ 358	Nec	MOS-P-FET-e*	SMD, VFET, LogL, 60/20V, $\pm$ 3/6A, on<0.3 $\Omega$ (1.5A)	39b		SOT-89	-
2 SJ 359	Tos	MOS-P-FET-e	VFET, LogL, 60/20V, 5A, on<0.25 $\Omega$ (2.5A), 130/200ns	=12		SOT-89	(2SJ266) <sup>4</sup>
2 SJ 360	Tos	MOS-P-FET-e	SMD, VFET, LogL, 60/20V, 1A, <0.73 $\Omega$ (0.5A), 20/100ns	39b		SOT-89	2SJ190, 2SJ278
2 SJ 361	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 20/20V, 2/4A, on<0.4 $\Omega$ (1A), 2/14 $\mu$ s integr. R-Gate	39b		SOT-89	-
2 SJ 362	Say	MOS-P-FET-e	VFET, LogL, 60V, 2A, 20W, on<0.4 $\Omega$	30p		TO-251	2SJ191, 2SJ194, 2SJ326
2 SJ 363	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 30/20V, 2/4A, on<0.45 $\Omega$ (1A)	39b		SOT-89	2SJ355...356
2 SJ 365	Shi	MOS-P-FET-e	VFET, 60/20V, 2A, 10W, <0.45 $\Omega$ , 60/160ns	{2SK2279		TO-251,252	2SJ191, 2SJ223, 2SJ326
2 SJ 366	Shi	MOS-P-FET-e	VFET, 60/20V, 5A, 15W, <0.25 $\Omega$ , 70/270ns	30p		TO-251,252	2SJ192, 2SJ245, 2SJ279, 2SJ327
2 SJ 367	Shi	MOS-P-FET-e	VFET, 60/20V, 5A, 15W, <0.25 $\Omega$ , 70/270ns	30p		(TO-220MF)	2SJ214, 2SJ275
2 SJ 368	Shi	MOS-P-FET-e	=2SJ367: 20W	17c		TO-220 Iso	2SJ248, 2SJ263
2 SJ 369	Shi	MOS-P-FET-e	VFET, 60/20V, 10A, 40W, <0.16 $\Omega$ , 100/320ns	30p		(TO-220MF)	2SJ214, 2SJ219, 2SJ296
2 SJ 370	Shi	MOS-P-FET-e	=2SJ369: 25W	17c		TO-220 Iso	2SJ236, 2SJ293, 2SJ321, 2SJ390
2 SJ 371	Shi	MOS-P-FET-e	VFET, 60/20V, 15A, 50W, <0.1 $\Omega$ , 130/460ns	{2SK2284		(TO-220MF)	2SJ219, 2SJ268, 2SJ296, 2SJ384
2 SJ 372	Shi	MOS-P-FET-e	=2SJ371:	{2SK2285		TO-220 Iso	2SJ237, 2SJ265, 2SJ293, 2SJ321, 2SJ329
2 SJ 373	Shi	MOS-P-FET-e	VFET, 60/20V, 20A, 60W, <0.07 $\Omega$ , 175/660ns	{2SK2286		(TO-220MF)	2SJ220, 2SJ297, 2SJ409
2 SJ 374	Shi	MOS-P-FET-e	=2SJ373:	{2SK2287		TO-220 Iso	2SJ294, 2SJ322, 2SJ330, 2SJ374
2 SJ 375	Shi	MOS-P-FET-e	VFET, 60/20V, 30A, 60W, <45m $\Omega$ , 270/1020ns	{2SK2288		(TO-220MF)	2SJ280
2 SJ 376	Shi	MOS-P-FET-e	=2SJ375:	{2SK2289		TO-220 Iso	2SJ295, 2SJ323, 2SJ334
2 SJ 377	Tos	MOS-P-FET-e	VFET, LogL, 60/20V, 5A, 20W, <0.19 $\Omega$ (2.5A), 45/200ns	30p		TO-251	2SJ192, 2SJ195, 2SJ245, 2SJ279, 2SJ327
2 SJ 378		MOS-P-FET-e	=2SJ377: 1,2W	=12			-
2 SJ 379	Tos	MOS-P-FET-e	VFET, LogL, 100/20V, 8A, 15W, <0.21 $\Omega$ (4A), 50/110ns	=30p			-
2 SJ 380	Tos	MOS-P-FET-e	VFET, LogL, 100/20V, 12A, 35W, <0.21 $\Omega$ (6A), 50/110ns	17c		TO-220 Iso	2SJ222
2 SJ 381	Say	MOS-P-FET-e	SMD, VFET, LogL, 12/10V, 2A, on<0.4 $\Omega$	39b		SOT-89	2SJ355...356
2 SJ 382	Say	MOS-P-FET-e	VFET, LogL, 12/10V, 4A, 20W, on<177m $\Omega$	30p		TO-251	2SJ192, 2SJ195, 2SJ245, 2SJ279, 2SJ327
2 SJ 383	Say	MOS-P-FET-e	VFET, LogL, 12/10V, 8A, 30W, on<82m $\Omega$	30p		TO-251	2SJ389
2 SJ 384(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 15/60A, 50W, on<0.1 $\Omega$ (8A)	30p		(TO-220MF)	2SJ268, 2SJ409
2 SJ 386	Hit	MOS-P-FET-e*	VFET, LogL, 30/20V, 3/5A, 0.9W, <0.4 $\Omega$ (2A), 36/105ns	7c(9mm)		TO-92L	-
2 SJ 387(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 20/10V, 10/40A, 20W, on<70m $\Omega$ (5A)	30p		TO-251/252	2SJ388...389
2 SJ 388(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 30/20V, 10/40A, 20W, on<80m $\Omega$ (5A)	30p		TO-251/252	2SJ389
2 SJ 389(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 20W, on<135m $\Omega$ (5A)	30p		TO-251/252	-
2 SJ 390	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 10/40A, 25W, on<0.12 $\Omega$ (5A)	17c		SOT-186	2SJ175...176, 2SJ236
2 SJ 399	Hit	MOS-P-FET-e*	SMD, VFET, LogL, 30/20V, 0.2/0.4A, on<7 $\Omega$ (10mA) 530/7640ns, integr. Rgate	35a		SOT-23	-
2 SJ 400	Say	MOS-P-FET-e	VFET, LogL, 30/20V, 35/140A, 70W, on<35m $\Omega$	30p		(TO-220MF)	2SJ280
2 SJ 403	Say	MOS-P-FET-e	VFET, LogL, 200/20V, 5/20A, 25W, on<1.1 $\Omega$	17c		TO-220 Iso	2SJ404...406
2 SJ 404	Say	MOS-P-FET-e	VFET, LogL, 200/20V, 6/24A, 25W, on<0.8 $\Omega$	17c		TO-220 Iso	2SJ405...406
2 SJ 405	Say	MOS-P-FET-e	VFET, LogL, 200/20V, 8/32A, 30W, on<0.5 $\Omega$	17c		TO-220 Iso	2SJ405
2 SJ 406	Say	MOS-P-FET-e	VFET, LogL, 200/20V, 12/48A, 40W, on<0.23 $\Omega$	17c		TO-220 Iso	-
2 SJ 408(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 60/20V, 50/200A, 100W, on<0.02 $\Omega$ (25A)	30p		(TO-3FM)	-
2 SJ 409(L,S)	Hit	MOS-P-FET-e*	VFET, LogL, 100/20V, 20/80A, 75W, on<0.16 $\Omega$ (10A)	30p		(TO-220MF)	(2SJ221) <sup>6</sup>
2 SJ 410(L,S)	Hit	MOS-P-FET-e*	VFET, 200/20V, 6/24A, 30W, on<0.85 $\Omega$ (3A), 57/130ns	17c		SOT-186	2SJ307...308
2 SJ 413	Say	MOS-P-FET-e	VFET, LogL, 60/20V, 50/200A, 70W, on<0.02 $\Omega$	18c		TO-3P	2SJ218
2 SJ 414	Say	MOS-P-FET-e	VFET, LogL, 60/20V, 15/72A, 50W, on<0.08 $\Omega$			(ZP)	-
2 SJ 415	Say	MOS-P-FET-e	VFET, LogL, 60/20V, 8/40A, 40W, on<0.15 $\Omega$			(ZP)	-
2 SJ 416	Say	MOS-P-FET-e	SMD, VFET, LogL, 30/20V, 2A, on<0.44 $\Omega$	39b		SOT-89	2SJ356
2 SJ 417	Say	MOS-P-FET-e	SMD, VFET, LogL, 30/20V, 4A, 20W, on<0.16 $\Omega$	30p		TO-251	2SJ192, 2SJ245, 2SJ279, 2SJ327
2 SJ 418	Say	MOS-P-FET-e	SMD, VFET, LogL, 30/20V, 8A, 30W, on<0.08 $\Omega$	30p		TO-251	2SJ467
2 SJ 419	Say	MOS-P-FET-e	SMD, VFET, LogL, 12/10V, 4A, on<82m $\Omega$	8-MDIP		(SOP8)	-
2 SJ 420	Say	MOS-P-FET-e	SMD, VFET, LogL, 12/10V, 5A, on<63m $\Omega$	8-MDIP		(SOP8)	-
2 SJ 421	Say	MOS-P-FET-e	SMD, VFET, LogL, 30/20V, 5A, on<58m $\Omega$	8-MDIP		(SOP8)	-
2 SJ 437	Say	MOS-P-FET-e	VFET, 30/20V, 35/120A, 50W, on<16m $\Omega$			(ZP)	-
2 SJ 454	Say	MOS-P-FET-e	FREDFET, 250/30V, 5/20A, 40W, <1.3 $\Omega$			(ZP)	-
2 SJ 455	Say	MOS-P-FET-e	FREDFET, 250/30V, 7/28A, 45W, <0.9 $\Omega$			(ZP)	-
2 SJ 456	Say	MOS-P-FET-e	FREDFET, 250/30V, 9/36A, 50W, <0.62 $\Omega$			(ZP)	-
2 SJ 457	Say	MOS-P-FET-e	FREDFET, 450/30V, 0.5/2A, 30W, <15 $\Omega$	30p		TO-251	-
2 SJ 458	Say	MOS-P-FET-e	FREDFET, 450/30V, 2/8A, 60W, <5.5 $\Omega$	30p		(TO-220MF)	-
2 SJ 459	Say	MOS-P-FET-e	FREDFET, 450/30V, 4/16A, 70W, <2.8 $\Omega$	30p		(TO-220MF)	-
2 SJ 466	Say	MOS-P-FET-e	VFET, LogL, 30/20V, 35/140A, 50W, on<0.03 $\Omega$			(ZP)	-
2 SJ 467	Say	MOS-P-FET-e	VFET, LogL, 30/25V, 8A, 30W, on<0.1 $\Omega$	30p		TO-251	2SJ418
2 SJ 468	Say	MOS-P-FET-e	VFET, LogL, 30/25V, 4A, on<0.1 $\Omega$			8-MDIP	(SOP8)
2 SJ 469	Say	MOS-P-FET-e	VFET, LogL, 30/25V, 5A, on<0.08 $\Omega$			8-MDIP	(SOP8)
<b>2SK</b>							
2 SK 11	Tos	N-FET	Uni, 20V, Idss=0.3...6.5mA, Up=0.5...6V	5n		TO-17	BFS 70, 2N3369, 2N3821, 2SK381, ++
2 SK 12	Tos	N-FET	Uni In, 20V, Idss=0.45...5mA, Up=0.65...4.5V	5n		TO-17	BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 13	Tos	N-FET	Uni In, 12V, Idss=0.45...5mA, Up=0.65...4.5V	5n		TO-17	BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 15	Tos	N-FET	Uni In, 20V, Idss=0.45...5mA, Up=0.65...5V	5n		TO-17	BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 16	Hit	N-FET	Uni In, 15V, Idss=0.5...7mA, Up=0.5...5V	5a		TO-72	BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 17	Tos	N-FET	Uni In, 20V, Idss=0.3...6.5mA, Up=0.5...6V	7e		TO-92	BFS 70, 2N3369, 2N3821, 2SK381, ++
2 SK 18	Tos	N-FET	Dual, S,VHF, 40V, Idss=0.45...2.8mA, Up=0.8...3.5V	TO-80		(SGD-DGS-)	-
2 SK 19(TM)	Tos, Mic	N-FET	FM/VHF, 18V, Idss=3...24mA, Up=3>1,2V F<3.5/Gp=20dB(100MHz)	7d		TO-98	BFS 71, BFS 80, BFW 11, 2N3822, 2N4416++
2 SK 22		MOS-N-FET					-
2 SK 23(A)-2...-9	Son	N-FET	FM/VHF, 18...40V, Idss=2.7...12mA, Up<4.9V	10a		(BF 245)	2SK107, 2SK192
2 SK 24	Say	N-FET	LFAM, 40V, Idss=0.6...24mA, Up<6V	=2a		=TO-18	BF 245
2 SK 25	Say	N-FET	AM/FM, 18V, Idss=0.6...24mA, Up<7.2V F=2.5/Gp=21dB(100MHz)	=2a		=TO-18	BF 245
2 SK 30(A,ATM)	Tos, Mic	N-FET	LF,Uni, In, 50V, Idss=0.3...6.5mA, Up=0.4...5V	7e		TO-92	BFS 70, 2N3821, 2SK40, 2SK46, 2SK59, ++
2 SK 32	Nec	N-FET	Uni, 35V, 20mA, Idss<10mA, Up<4V	7e		TO-92	BFS 70, 2N3821, 2SK40, 2SK46, 2SK59, ++
2 SK 33	Mit, Mic	N-FET	FM/VHF, 20V, Idss=2.5...20mA, Up=1...8V F=2.5/Gp=20dB(100MHz)	7d		TO-92	BF 245
2 SK 34	Mit, Mic	N-FET	LF,Uni, 30V, Idss=0.3...12mA, Up=0.3...6V	7e		TO-92	(BF 245)
2 SK 35	Son	N-FET	Uni, 20V, 20mA, Idss<16mA, Up<1.6V	10a		7f	BFS 70, 2N3369, 2N3821, 2SK381, ++ 2N5247, 2SK186...187, 2SK363...364, ++

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International	
2 SK 37	Nec	N-FET	AM/FM, 20V, 20mA, Idss=0.5...6mA, Up=0.3...4.5V	24e	=SOT-37	(BF 245)	7f	BFS 70, 2N3821, 2SK161
2 SK 38	Mit	N-FET	S, Uni, 20V, 20mA, Idss=0.4...5mA, Up=9V	=42				BFS 70, 2N3369, 2N3821, 2SK381, ++
2 SK 38A		N-FET	=2SK38: Idss=0.7...7mA, Up<5V	=42				BFS 70, 2N3369, 2N3821, 2SK381, ++
2 SK 39(A)	Son	N-FET	LF Inp In, 20V, Idss=35...564µA	10d				2SK92...93, 2SK103, 2SK692
2 SK 40	Hit	N-FET	LF In, 50V, Idss=0.3...6.5mA, Up=0.4...5V	9a, 7e	-, TO-92	(BF 245)	7f	BFS 70, 2N3369, 2N3821, 2SK46, 2SK59, ++
2 SK 41	Say, Mic	N-FET	FM, 18V, Idss=0.6...24mA, Up<5V, Gp=22dB(100MHz)	7d	TO-92			BFS 70, 2N3821, 2N5246, 2SK161, ++
2 SK 41 NP		N-FET	=2SK41:	7f	TO-92			
2 SK 42	Son	N-FET	AM/FM, 10V, Idss=1...5mA, Up>0.3V F<2.5/Gp>12dB(100MHz)	10d				2N5246, 2SK107, 2SK161
2 SK 43(S)	Son	N-FET	LF, Uni In, 30V, Idss=0.9...14.3mA, Up=0.18...1.49V	7d, 7e	TO-92			2SK121, 2SK163, 2SK170, 2SK186...187, ++
2 SK 44	Say	N-FET	LF, In, 20V, Idss=0.06...0.3mA, Up<4V	=7e	=TO-106			-
2 SK 44 SP		N-FET	=2SK44:	41b				-
2 SK 45	Nec	N-FET	LF, HF, 22V, 20mA, Idss=0.5...6mA, Up=0.3...4.5V	5m	TO-72			BFS 70, 2N3369, 2N3821, 2N4220, 2SK104, ++
2 SK 46	Mit	N-FET	LF Inp In, 30V, Idss=0.3...3mA, Up=0.3...5V	41e	(TO-92S)			BFS 70, 2N3369, 2N3821, 2N4220, 2SK59, ++
2 SK 47	Nec	N-FET	Uni, 20V, 20mA, Idss=0.5...6mA, Up<4.5V	7e	TO-92			BFS 70, 2N3369, 2N3821, 2N4220, 2SK104, ++
2 SK 48	Tos	N-FET	LF, In, 20V, Idss=0.3...3mA, Up=0.35...2.3V	5n	TO-17			BF 410A, 2N4339, 2N5358, 2SK193, 2SK195
2 SK 49	Nec	N-FET	AM/FM, 20V, Idss=0.5...6mA, Up<2.5V F<6/Gp=18dB(100MHz)	7f	TO-92	(BF 245)	7f	BF 410A, 2SK193, 2SK195, 2SK212
2 SK 50	Mat, Mic	N-FET	LF Inp In, 10V, Idss=0.07...1mA, Urc=4µV(1kHz)	7e	TO-92			2N3367, 2N4117...18, 2SK92...93, 2SK103, ++
2 SK 54	Hit	N-FET	LF Inp, Mx, 15V, Idss=0.8...5mA, Up=0.3...5.5V F<3.5/Gp=15dB(100MHz)	9f, 7f	-, TO-92	(BF 245)	7f	BF 410A, BFS 70, 2N3821, 2SK212, ++
2 SK 55	Hit	N-FET	FM Inp, Mx, 18V, Idss=3...14mA, Up=0.3...5.5V F<3.5/Gp=18dB(100MHz)	9f, 7f	-, TO-92	BF 245	7f	BF 244...245, BFS 71, 2N3822...23, 2SK107, ++
2 SK 56	Mat, Mic	N-FET	FM/VHF, 10V, 10mA, Idss=0.7...10mA, Up<4V F<4.5/Gp>18dB(100MHz)	7f	TO-92			BF 410A, BFS 70, 2N3821, 2SK161, ++
2 SK 57	Nec	N-FET	SMD, 20V, 20mA, Idss=0.5...6mA, Up=0.3...4V	35f	SOT-23			BF 510, 2SK160
2 SK 58	Son	N-FET	Dual, 27V, 20mA, Idss=1...16.5mA, Up=0.45...4.95V	6-DIP	(DGSSGD)			-
2 SK 59	Hit	N-FET	LF Inp In, 30V, Idss=0.3...1.4mA, Up=0.4...5V	9a	(SPAK)			BFS 70, 2N3821, 2N4220, 2SK46, 2SK104, ++
2 SK 60	Son	N-FET	VFET, 170V, 5A, 63W, on=16Ω	2(SJ)18	TO-3			-
2 SK 61	Tos	N-FET	FM/VHF, 18V, Idss=1...10mA, Up=0.4...4V F<3.5/Gp=18dB(100MHz)	7d	TO-92	BF 245	7f	BF 244A...245A, BFS 71, 2N3822...23, ++
2 SK 63	Son	N-FET	VFET, 120V, 0.2A, 0.47W, Up<9.5V	2a	TO-39			-
2 SK 65	Mat	N-FET	LF(Mic) Inp In, 12V, 2mA, Idss=0.04...0.8mA	9e				-
2 SK 66	Mat, Mic	N-FET	LF In, 55V, Idss=0.3...6.5mA, Up=0.4...5V, F<5dB(120Hz)	7e	TO-92			BFS 70, 2N3821, 2N4220, 2SK59, 2SK104, ++
2 SK 67(A)	Nec	N-FET	SMD, 20V, 10mA, Idss=0.02...1mA, Up<0.8V	=35b				-
2 SK 68(A)	Nec	N-FET	LF, 50V, 20mA, Idss=0.5...12mA, Up=0.13...1.5V	7a	TO-92			2SK106, 2SK121, 2SK163, 2SK170, 2SK184, ++
2 SK 69	Nec	N-FET	VFET, LF, 140/30V, 0.1A, 0.8W, Idss>1.8mA	2(SJ)19	2a			-
2 SK 70	Nec	N-FET	VFET, 100/40V, 10A, 100W, Idss=3...6A	2(SJ)20	23a			-
2 SK 71	Nec	N-FET	VFET, 160/30V, 15W, Idss=30...300	2(SJ)21	22a			-
2 SK 72	Tos	N-FET	Dual, VHF, 20V, Idss=0.6...6.5mA, Up=0.5...3.3V	TO-80	(SDG-SDG-)			-
2 SK 73	Mat	N-FET	LF P, 200V, 0.1A, 5W, Idss<100mA	14a	TO-126			-
2 SK 79	Son	N-FET	VFET, LF, 120/10V, 0.2A, 0.75W	7c(9mm)	TO-92L			-
2 SK 83	Mat, Mic	N-FET	FM/VHF, 25V, 10mA, Idss=0.5...12mA, Up<2.5V F<3.5/Gp>12dB(100MHz)	7f	TO-92			BF 410A, 2SK193, 2SK195, 2SK606, ++
2 SK 84	Mat	N-FET	LF, Uni, 55V, Idss=0.3...6.5mA, Up=0.4...5V	9e				BFS 70, 2N3821, 2N4220, 2SK59, 2SK104, ++
2 SK 85	Nec	GaAs-N-FET	UHF, 10V, 100mA, Idss=30...100mA, Up>1.5V F<4.5/Gp=11dB(8GHz)	52(SGSD)	=SOT-100			-
2 SK 87	Hit	N-FET	LF, Uni, 50V, Idss>0.3...6.5mA, Up=0.4...5V	2b	TO-18			BFS 70, 2N3821, 2N4220, 2SK59, 2SK104, ++
2 SK 92	Nec	N-FET	LF, HF Inp, 20V, 10mA, Idss=0.02...1mA, Up<0.8V	7e	TO-92			2SK93, 2SK103, 2SK692
2 SK 93	Son	N-FET	LF Inp, 20V, Idss=18...564µA	7e	TO-92			2SK92, 2SK103, 2SK692
2 SK 94	Nec	N-FET	SMD, 50V, 20mA, Idss=0.5...12mA, Up=0.13...1.5V	35f	SOT-23			2SK209, 2SK425
2 SK 95	Shi	N-FET	LFS, 150V, Idss<28mA, Up<9V					-
2 SK 96	Shi	N-FET	=2SK95: 200V					-
2 SK 97	Son	N-FET	Dual, 30V, Idss=0.9...14.3mA, Up=0.9...1.49V	6-DIP	(DGSSGD)			-
2 SK 103	Nec	N-FET	LF, HF Inp, 20V, 10mA, Idss=0.02...1mA, Up<0.8V					-
2 SK 104	Nec	N-FET	Uni, 30V, 20mA, Idss=0.5...12mA, Up=0.25...4.5V	7f	TO-92			BFS 70, 2N3821, 2N4220, 2N5359, 2SK104, ++
2 SK 105	Nec	N-FET	=2SK104: 50V	7a	TO-92			-
2 SK 106	Hit	N-FET	Uni, 50V, 20mA, Idss=0.5...12mA, Up=0.13...1.5V	7a	TO-92			2SK68, 2SK121, 2SK163, 2SK170, 2SK184
2 SK 107	Son	N-FET	FM/VHF, 27V, 20mA, Idss=2.7...12mA, Up=0.45...3.85V	7e	TO-92			BF 410B, 2SK192
2 SK 108	Mit	N-FET	Uni, In, 50V, 20mA, Idss=1...12mA, Up=0.1...3V	7e	TO-92			BF 410B, BFW 12, 2N4340, 2N5484, ++
2 SK 109(A)	Mit	N-FET	=2SK108: Dual	7-SIP	(DGSSGD)			-
2 SK 110	Mit	N-FET	Uni In, 30V, Idss=2.5...35mA, Up=0.1...2V, F<2dB(1k)	7a(9mm)	TO-92L			BC 264A...D, BF 410B...D, 2SK192, ++
2 SK 111	Mit	N-FET	=2SK110: Dual	7-SIP	(DGSSGD)			-
2 SK 112	Tos	N-FET	Uni In, 50V, Idss=1.2...9mA, Up=0.25...1.2V	2b(G=case)	TO-18			-
2 SK 113	Tos	N-FET	Uni, 50V, Idss=5...150mA, Up=0.3...10V	2b(G=case)	TO-18			-
2 SK 117	Tos	N-FET	LF, In, 50V, Idss=0.6...14mA, Up=0.2...1.5V	7a	TO-92			2SK68, 2SK106, 2SK121, 2SK163, 2SK184, ++
2 SK 118	Tos	N-FET	Uni, C-Mic, 50V, Idss=0.3...6.5mA, Up=0.4...1.5V	41e				2SK68, 2SK106, 2SK184
2 SK 119	Nec	N-FET	Uni, 30V, 20mA, Idss=0.5...12mA, Up=0.2...4.5V	2a(G=case)	TO-18			BFS 70, 2N3821, 2N4220, 2N5359, 2SK104, ++
2 SK 120	Son	N-FET	FM/VHF, 15V, 15mA, Idss=1...5mA, Up>0.3V F<2.5/Gp=16dB(100MHz)	7f	TO-92			BF 410A...B, 2N5484, 2SK192
2 SK 121	Son	N-FET	Uni In, 30V, Idss=0.9...14.3mA, Up=0.18...1.49V	7a, 7e	TO-92			BF 410A...B, 2N4340, 2SK121, 2SK163, ++
2 SK 123	Mat	N-FET	SMD, LF(Mic) Inp, 20V, 2mA, Idss=130...375µA	=35b				-
2 SK 124	Nec	GaAs-N-FET	UHF, X-Band, 8V, 100mA, Idss=30...100mA, Up=1...2.5V F<4/Gp=11dB(12GHz)	52(SGSD)	=SOT-100			-
2 SK 125	Son	N-FET	FM/VHF/UHF, 25V, 0.1A, Idss=40...75mA, Up=2...6V F<2.5/Gp=12.5dB(100MHz)	7e	TO-92			BFT 10C, 2SK582
2 SK 127	Mat	N-FET	LF In, 50V, 20mA, Idss=0.5...12mA	2(SJ)43	7a			-
2 SK 127 A		N-FET	=2SK127: 80V	7a	TO-92			-
2 SK 128	Mat	N-FET	LF In, 30V, 20mA, Idss=0.5...12mA, Up=0.1...1.5V	7a	TO-92			2SK68, 2SK106, 2SK184
2 SK 130(A)	Nec	N-FET	Uni, Analog-S, 30V, 50mA, Idss=5...30mA, Up<1.5V	7a	TO-92			2N5247, 2SK147, 2SK151, 2SK162, 2SK363
2 SK 131	Nec	N-FET	=2SK130: Dual	7e + 7a	2x =TO-92			-
2 SK 132	Hit	MOS-N-FET-e	VFET, 100/14V, 7A, 100W, on<1,7Ω, 18/14ns	2(SJ)47	23e			2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 133	Hit	MOS-N-FET-e	=2SK132: 120/14V	2(SJ)48	23e			2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 134	Hit	MOS-N-FET-e	=2SK132: 140/14V	2(SJ)49	23e			2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 135	Hit	MOS-N-FET-e	=2SK132: 160/14V	2(SJ)50	23e			2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 136	Mat	N-FET	Uni In, 30V, 20mA, Idss=0.5...20mA, Up=0.1...2V	7a	TO-92			2N4339, 2N5358, 2SK83
2 SK 137(A)	Mat	N-FET	S, LF In, 15V, 50mA, Idss=0.5...40mA	2f(G=case)	TO-39			-
2 SK 138	Nec	GaAs-FET	UHF, X-Band, 5V, 100mA, 8GHz, Idss=30...100mA Up=3.5>1.5V, F<3.5/Gp=12dB(8GHz)	52(SGSD)	SOT-100			-
2 SK 140	Nec	GaAs-FET	UHF, X-Band, 5V, 100mA, Idss=30...100mA, Up>1V F<3.5/Gp=11dB(12GHz)	52(SGSD)	SOT-100			-
2 SK 141(A)	Nec	N-FET	Uni, 50V, 20mA, Idss=0.5...12mA, Up=0.2...4.5V	2b	TO-18			BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 146	Tos	N-FET	=2SK147: Dual	2(SJ)73	7e + 7a			-

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 147	Tos	N-FET	Uni In, 40V, Idss=5...30mA, Up=0.3...1.2V	I2SJ72	7a(9mm)	TO-92L	2N5247, 2SK130, 2SK151, 2SK162, 2SK363
2 SK 148	Mat	N-FET	FM/VHF, 25V, 10mA, Idss<12mA, F=2.5dB(100MHz)	9e			-
2 SK 149	Nec	N-FET	UHF, 20V, 35mA, Idss=8...32mA, Up=0.35...2.2V F=2/Gp=12dB(400MHz)	5m		TO-72	-
2 SK 150	Tos	N-FET	Dual, 50V, Idss=1...14mA, Up=0.3...2V	7-SIP		(DGSSSGD)	-
2 SK 151	Hit	N-FET	S, LF In, 40V, 200mA, Idss=6...50mA, Up<1.1V	I2SJ51	7a(9mm)	TO-92L	2N5247
2 SK 152	Son	N-FET	FM/VHF, 15V, 50mA, Idss=9.5...42mA, Up=0.55...2V	7d		TO-92	BF 410D
2 SK 154	Mat	N-FET	FM/VHF, 20V, 30mA, Idss<18mA, F=1.5dB(100MHz)	7f		TO-92	-
2 SK 155	Mat	N-FET	Uni In, 20V, 30mA, Idss=0.5...30mA, Up=0.1...1.5V	7a		TO-92	2SK68, 2SK106, 2SK184
2 SK 156	Say	N-FET	LF(Mic) Inp, 20V, Idss=0.06...0.8mA, Zin>20MΩ	41e			-
2 SK 157	Hit	N-FET	SMD, 50V, 20mA, Idss=0.5...12mA, Up=0.13...1.5V	35f		SOT-23	2SK94
2 SK 158	Mat	N-FET	SMD, 55V, Idss<6.5mA, F<5dB(120Hz)	35b		SOT-23	-
2 SK 160	Nec	N-FET	SMD, VHF, 30V, 20mA, Idss=0.5...12mA, Up=0.25...4.5V	35f		SOT-23	-
2 SK 160 A		N-FET	=2SK160: 50V	35f		SOT-23	-
2 SK 161	Tos	N-FET	FM/VHF, 18V, Idss=1...10mA, Up=0.4...4V F<3.5/Gp=18dB(100MHz)	41d			2N5246, 2SK107
2 SK 162	Nec	N-FET	LF In, MC Inp, 40V, Idss=5...30mA, Up<1.2V	7a		TO-92	2SK147, 2SK151
2 SK 163	Nec	N-FET	Uni, In, 50V, 30mA, Idss=1...18mA, Up=0.2...1.2V	7a		TO-92	2SK43, 2SK121, 2SK170, 2SK186...187, ++
2 SK 165	Mat	N-FET	Video-Camera, 15V, 50mA, Idss=8...32mA, Up<3V	7e, 7d		TO-92	-
2 SK 168	Hit	N-FET	FM Inp, Mx, Os, 20mA, 30V, Idss=4...20mA, Up<3V F=1.7/Gp=27dB(100MHz)	7f		TO-92	BF 410C
2 SK 169	Mat	N-FET	LF In, 15V, 50mA, Idss<50mA	7		TO-92	-
2 SK 170	Tos	N-FET	Uni In, 40V, Idss=1...20mA, Up=0.2...1.5V	I2SJ74	7a	TO-92	2SK43, 2SK121, 2SK163, 2SK186...187, ++
2 SK 171	Mit	N-FET	Dual, 20V, 80mA, Idss=5...60mA, Up<2V, F<1dB(100Hz)	7-SIP		(DGSSSGD)	-
2 SK 173	Son	MOS-N-FET-e	VFET, 210/8V, 10A, 95W	23e		TO-3	(BUZ 35, 2SK401) <sup>5</sup>
2 SK 175	Hit	MOS-N-FET-e	VFET, 180/20V, 8A, 125W, on<1.7Ω, 250/90ns	I2SJ55	23e	TO-3	2SK258, (BUZ 33) <sup>5</sup>
2 SK 176	Hit	MOS-N-FET-e	=2SK175: 200/20V	I2SJ56	23e	TO-3	2SK258, (BUZ 33) <sup>5</sup>
2 SK 180	old	MOS-N-FET-e	VFET, 600V, 20A, 300W, on<1.5Ω, 200/250ns		68e		-
2 SK 181	old	MOS-N-FET-e	=2SK180: 800V		68e		-
2 SK 182	old	MOS-N-FET-e	VFET, 600V, 60A, 1000W, on<0.66Ω, 250/300ns				-
2 SK 183	old	MOS-N-FET-e	=2SK182: 800V				-
2 SK 184	Tos	N-FET	LF In, 50V, Idss=0.6...14mA, Up=0.2...1.5V	41a			2SK68, 2SK106
2 SK 185	Son	N-FET	Dual, 30V, 20mA, Idss=0.9...14.3mA, Up=0.18...1.49V	7e + 7a		2x =TO-92	-
2 SK 186	Hit	N-FET	Uni In, 40V, 30mA, Idss=1.6...12mA, Up=0.13...1.5V	7a		TO-92	2SK187, 2SK364, 2SK366
2 SK 187	Hit	N-FET	Uni In, 40V, 30mA, Idss=2.5...20mA, Up=0.13...1.5V	7a		TO-92	2SK186, 2SK364, 2SK366
		N-FET	=2SK190				-
2 SK 190	Hit	N-FET	LF In, 40V, 0.2A, Idss=6...50mA, Up=0.13...1.5V	7a(9mm)		TO-92L	-
2 SK 191	Hit	N-FET	LF, 15V, 0.5A, Idss=10...200mA, Up<3V, F=1.1dB(1k)	7a(9mm)		TO-92L	-
2 SK 192(A)	Tos	N-FET	FM/VHF, 18V, Idss=3...24mA, Up=1.2...3V F<3.5/Gp=20dB(100MHz), A: Gp=24dB(100MHz)	41d			BF 410B...C
2 SK 193	Nec	N-FET	FM Tuner, 20V, 10mA, Idss=0.5...8mA, Up<2.5V F<6/Gp=21dB(100MHz)	40f		(SST)	BF 410A, 2SK195, 2SK212
2 SK 194	Nec	N-FET	Dual, 40V, 50mA, Idss=5...24mA, Up<1.2V	7e + 7a		2x =TO-92	-
2 SK 195	Nec	N-FET	FM Tuner, 20V, 10mA, Idss=0.5...8mA, Up<2.5V F<6/Gp=21dB(100MHz)	7f		TO-92	BF 410A, 2SK193, 2SK212, 2SK606
2 SK 196	Hit	MOS-N-FET-e	VFET, 160/15V, 0.5A, 0.8W, on<15Ω, 20/30ns	2e(S=case)		TO-39	BSS 93
2 SK 197	Hit	N-FET	SMD, VHF, 18V, 20mA, Idss=2...14mA, Up=0.3...4V	35c		SOT-23	2SK210, 2SK217
2 SK 198	Mat	N-FET	SMD, LF In, 30V, 20mA, Idss=0.5...12mA, Up=0.1...1.5V	35f		SOT-23	-
2 SK 199	Mat	N-FET	SMD, HF, 15V, Idss=12mA	35c		SOT-23	-
2 SK 201	Nec	GaAs-N-FET	UHF, C...X-Band, 10V, 400mA, Idss=180...400mA Up=3...7V, F=3/Gp=9dB(8GHz)	52(SGSD)		SOT-100	-
2 SK 203	Nec	GaAs-N-FET	UHF, C...X-Band, 10V, 180mA, Idss=90...180 Up=3...7V, F=2.6/Gp=11dB(8GHz)	52(SGSD)		SOT-100	-
2 SK 208	Tos	N-FET	SMD, C-Mic, 50V, Idss=0.3...6.5mA, Up=0.4...5V	35f		SOT-23	-
2 SK 209	Tos	N-FET	SMD, Uni, 50V, Idss=0.6...14mA, Up=0.2...1.5V	35f		SOT-23	2SK94, 2SK425
2 SK 210	Tos	N-FET	SMD, FM/VHF, 18V, Idss=3...24mA, Up=1.2...3V F<3.5/Gp=24dB(100MHz)	35c		SOT-23	2SK217
2 SK 211	Tos	N-FET	SMD, FM/VHF, 18V, Idss=1...10mA, Up=0.4...4V F<3.5/Gp=18dB(100MHz)	35c		SOT-23	2SK197
2 SK 212	Say	N-FET	FM, 20V, 20mA, Idss=0.6...12mA, Up<2.5V F<6/Gp=21dB(100MHz)	41d			BF 410A, 2N5484
2 SK 213	Hit	MOS-N-FET-e*	VFET, 140/15V, 0.5A, 30W, on=8Ω, 20/30ns	I2SJ76	17d	TO-220	-
2 SK 214	Hit	MOS-N-FET-e*	=2SK213: 160/15V	I2SJ77	17d	TO-220	-
2 SK 215	Hit	MOS-N-FET-e*	=2SK213: 180/15V	I2SJ78	17d	TO-220	-
2 SK 216	Hit	MOS-N-FET-e*	=2SK213: 200/15V	I2SJ79	17d	TO-220	-
2 SK 217	Hit	N-FET	SMD, VHF, 30V, 20mA, Idss=2.5...12mA, Up<2.5V	35c		SOT-23	2SK210, 2SK217
2 SK 218	Mat	N-FET	Video-Camera, 15V, 50mA, Idss=5...42mA, Up<3V	7d		TO-92	-
2 SK 220	Hit	MOS-N-FET-e	VFET, 160/20V, 8A, 100W, on<1.5Ω, 25/45ns	23e		TO-3	2SK258, (BUZ 33) <sup>5</sup>
2 SK 221	Hit	MOS-N-FET-e	=2SK220: 200V	23e		TO-3	2SK258, (BUZ 33) <sup>5</sup>
2 SK 222	Say	N-FET	Uni, In, 40V, Idss=0.6...12mA, Up=0.5V, F<3dB(1kHz)	7e		TO-92	2SK68, 2SK102, 2SK184
2 SK 223	Say	N-FET	LF Drv, 80V, Idss=1.2...24mA, Up=0.75V	7e		TO-92	-
2 SK 225	Hit	MOS-N-FET-e	VFET, 120/15V, 7A, 100W, on<1.7Ω, 180/60ns	I2SJ81	20d		(2SK343...344) <sup>5</sup>
2 SK 226	Hit	MOS-N-FET-e	=2SK225: 140/15V	I2SJ82	20d		(2SK343...344) <sup>5</sup>
2 SK 227	Hit	MOS-N-FET-e	=2SK225: 160/15V	I2SJ83	20d		(2SK344) <sup>5</sup>
2 SK 238	Nec	N-FET	SMD, FM, 20V, Idss=0.5...12mA, Up<2.5V Gp=21dB(100MHz)	35e		SOT-23	BF 510
2 SK 240	Tos	N-FET	Dual, 40V, Idss=2.6...20mA, Up=0.2...1.5V, F<2dB(1k)	7e + 7a		2x =TO-92	-
2 SK 241	Tos	MOS-N-FET-d*	FM/VHF, 20V, 30mA, Idss=1.5...14mA, Up<2.5V F=1.7<3/Gp=28dB(100MHz)	41d			-
2 SK 242	Say	N-FET	=2SK212: SMD	35e		SOT-23	BF 510, 2SK238
2 SK 246	Tos	N-FET	Uni, 50V, Idss=1.2...14mA, Up=0.7...6V	I2SJ103	7e	TO-92	2N5457, 2SK330
2 SK 247	Mat	N-FET	SMD, HF, 15V, 200mA, Idss=0.5...12mA, Up<3V	35f		SOT-23	-
2 SK 258	Hit	MOS-N-FET-e	VFET, 250/20V, 8A, 125W, on<1.3Ω, 25/140ns	23e		TO-3	(2SK277...278, 2SK293, 2SK299) <sup>5</sup>
2 SK 259	Hit	MOS-N-FET-e	VFET, 350/20V, 5A, 125W, on<3Ω, 25/140ns	23e		TO-3	(BUZ 44, BUZ 46, BUZ 63) <sup>5</sup>
2 SK 260	Hit	MOS-N-FET-e	VFET, 400/20V, 5A, 125W, on<3Ω, 25/140ns	23e		TO-3	(BUZ 44, BUZ 46, BUZ 63) <sup>5</sup>
2 SK 261	Hit	N-FET	=2SK213				*2SK213
2 SK 262	Hit	N-FET	=2SK213				*2SK213
2 SK 263	Hit	N-FET	=2SK213				*2SK213
2 SK 264	Hit	N-FET	=2SK214				*2SK214
2 SK 266	Tos	N-FET	LF(Mic) Inp 15V, Zin>200MΩ				-
2 SK 270	Tos	N-FET	Dual, 40V, Idss=1...20mA, Up=0.2...2V, F<2dB(1kHz)	7-SIP		(DGSSSGD)	-
2 SK 271	Tos	MOS-N-FET-e	VFET, 140/8V, 8A, 120W	I2SJ91	23a	TO-3	2SK405, 2SK631, 2SK633, 2SK1529
2 SK 272	Tos	MOS-N-FET-e	=2SK271: 7A, 100W	I2SJ92	18p	TO-3P	2SK413...414, 2SK631, 2SK633, 2SK1529



Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 273	Mit	GaAs-N-FET	UHF, S...X-Band, 8V, 100mA, Idss=30...100mA Up=1...5V, F=4.5dB(12GHz)	52(SGSD)	SOT-100		-
2 SK 274	Mit	GaAs-N-FET	=2SK273: F=3dB(12GHz)	52(SGSD)	SOT-100		-
2 SK 275	Mit	GaAs-N-FET	=2SK273: F=0.8-1dB(4GHz)	52(SGSD)	SOT-100		-
2 SK 276	Mit	GaAs-N-FET	UHF, S...X-Band, 6V, 80mA, Idss=30...80mA Up=1...5V, F=2.8dB(18GHz)	52(SGSD)	SOT-100		-
2 SK 277	Nec	MOS-N-FET-e	VFET, 350/20V, 7A, 100W, <1.5 $\Omega$ , 40/60ns	23a	TO-3		BUZ 330...331, 2SK298, 2SK501, 2SK2361,++
2 SK 278	Nec	MOS-N-FET-e	=2SK277: 400/20V	23a	TO-3		BUZ 330...331, 2SK298, 2SK501, 2SK2361,++
2 SK 279	Mit	GaAs-N-FET	UHF, S...X-Band, 5V, 250mA, Idss=150...250mA Up=2...6V, Gp=9dB(8GHz)	52(SGSD)	SOT-100		-
2 SK 280	Nec	GaAs-N-FET	UHF, X...Ku-Band, 5V, 100mA, Idss=20...100mA Up=0.5...6V, F=2.3/Gp=8dB(15GHz)	52(SGSD)	SOT-100		-
2 SK 281	Nec	GaAs-N-FET	VHF, C-Band, 5V, 120mA, Idss=30...120mA, Up=0.8...6V F=2/Gp=10dB(8GHz)	52(SGSD)	SOT-100		-
2 SK 283	Say	N-FET	SMD, LF Drv, 80V, Idss=1.2...17mA, Up=0.75V	35f	SOT-23		-
2 SK 286	Hit	MOS-N-FET-e	VFET, 60/20V, 8A, 100W, on<0.8 $\Omega$ , 80/110ns	(2SJ96) 20d			2SK225...227, (2SK343...344) <sup>5</sup>
2 SK 287	Hit	MOS-N-FET-e	VFET, 60/20V, 8A, 100W, on<0.6 $\Omega$ , 25/350ns	20d			2SK225...227, (2SK343...344) <sup>5</sup>
2 SK 288	Hit	MOS-N-FET-e	=2SK287: 80/20V	20d			2SK225...227, (2SK343...344) <sup>5</sup>
2 SK 289	Hit	MOS-N-FET-e	VFET, 80/20V, 8A, 100W, 25/350ns	23e	TO-3		2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 290	Hit	MOS-N-FET-e	=2SK289: 100/20V	23e	TO-3		2SK175...176, (BUZ 33) <sup>5</sup>
2 SK 291	Hit	N-FET	Video-Camera, 15V, 50mA, Idss=6...50mA, Up<3V	7d	TO-92		-
2 SK 292	Nec	N-FET	FM Inp,Mx,Os, 20V, Idss=0.5...8mA, Up<2.5V F<6/Gp=21dB(100MHz)	40f	(SST)		BF 410A, 2SK193, 2SK195, 2SK212
2 SK 293(A)	Nec	MOS-N-FET-e	VFET, 300/20V, 7A, 100W, on<1.3 $\Omega$ (4A)	23a	TO-3		2SK277...278, 2SK298, 2SK501
2 SK 294	Hit	MOS-N-FET-e	VFET, 80/20V, 5A, 30W, on<0.4 $\Omega$ , 40/70ns	17p	TO-220		IRF 510...513, 2SK628, 2SK917, 2SK920,++
2 SK 295	Hit	MOS-N-FET-e	=2SK294: 100/20V	17p	TO-220		IRF510, IRF512, 2SK628, 2SK917, 2SK920++
2 SK 296	Hit	MOS-N-FET-e	VFET, 300/20V, 1A, 30W, on=2.5<4 $\Omega$ , 20/70ns	17p	TO-220		IRF 712
2 SK 298	Hit	MOS-N-FET-e	VFET, 400/20V, 8A, 100W, on<1.75 $\Omega$ , 50/120ns	(2SJ116) 23a	TO-3		BUZ 54, BUZ 94, 2SK512, 2SK724, 2SK2361+
2 SK 299	Hit	MOS-N-FET-e	=2SK298: 450/20V	(2SJ116) 23a	TO-3		BUZ 54, BUZ 94, 2SK512, 2SK724, 2SK2361+
2 SK 300	Son	N-FET	SMD, VHF, 15V, 50mA, Idss=9.5...42mA, Up=0.55...2V	35f	SOT-23		(BF 513) <sup>5</sup>
2 SK 301	Mat	N-FET	Uni, In, 55V, 30mA, Idss=0.5...20mA, Up<5V	7a	TO-92		BFS 70, 2N3821, 2N4220, 2SK104, ++
2 SK 302	Tos	MOS-N-FET-d	=2SK241: SMD	35c	SOT-23		-
2 SK 303	Say	N-FET	=2SK304: SMD	35f	SOT-23		2SK160
2 SK 304	Say	N-FET	Analog-S, 30V, 20mA, Idss=0.6...12mA, Up<4V	41e			BFS 70, 2N3821, 2N4220, 2SK104, 2SK301++
2 SK 308	Hit	MOS-N-FET-e	VFET, 120/20V, 10A, 100W, on<0.3 $\Omega$ , 60/160ns	23a	TO-3		BUZ 35, 2SK401, 2SK631, 2SK633, 2SK1529
2 SK 310	Hit	MOS-N-FET-e	VFET, 400/20V, 3A, 40W, on<4 $\Omega$ , 25/70ns	(2SJ117) 17p	TO-220	BUK 455/600A,B 17p	BUZ76, IRF720, IRF722, 2SK1244, 2SK1439+
2 SK 311	Hit	MOS-N-FET-e	=2SK310: 450/20V	17p	TO-220	BUK 455/600A,B 17p	BUZ76, 2SK1244, 2SK1439, 2SK1493...1494++
2 SK 312	Hit	MOS-N-FET-e	VFET, 400/20V, 12A, 125W, on<0.9 $\Omega$ , 70/200ns	23a	TO-3		BUZ45, BUZ64, 2SK512, 2SK724, 2SK2361,++
2 SK 313	Hit	MOS-N-FET-e	=2SK312: 450/20V	23a	TO-3		BUZ 45, 2SK512, 2SK724, 2SK2361...62,++
2 SK 314	Nec	N-FET	Uni, In, 40V, 50mA, Idss=5...30mA, Up=0.5...3V	2b	TO-18		BC 264, BF 410C, 2SK147, 2SK168
2 SK 315	Say	N-FET	FM Inp,Mx,Os, 20V, Idss=2.5...24mA, Up<3.5V F<4/Gp=23dB(100MHz)	41d			BF 410B, 2SK192
2 SK 316	Mat	N-FET	SMD, Video-Camera, 10V, 50mA, Idss=5...24mA, Up<3V	35f	SOT-23		2SK321
2 SK 317	Hit	MOS-N-FET-e*	VFET,VHF P, 180/20V, 8A, PQ-120W(100MHz),<1.5 $\Omega$ (4A)	57(SGSD)	SOT-119		-
2 SK 318	Hit	MOS-N-FET-e*	VFET, VHF P, 180/20V, 4A, PQ-90W(100MHz), <3 $\Omega$ (2A)	57(SGSD)	SOT-119		-
2 SK 319	Hit	MOS-N-FET-e	VFET, 400/20V, 5A, 50W, on<1.85 $\Omega$ , 50/120ns	17p	TO-220		BUZ 41A...42, 2SK893, 2SK1246, 2SK2355,++
2 SK 320	Hit	MOS-N-FET-e	=2SK319: 450/20V	17p	TO-220		BUZ 41A...42, 2SK893, 2SK1246, 2SK2355,++
2 SK 321	Mat	N-FET	SMD, Video-Camera, 15V, 50mA, Idss=5...42mA, Up<3V	35f	SOT-23		-
2 SK 322	Hit	N-FET	SMD, HF, 15V, 50mA, Idss=5...50mA, Up<3V	35f	SOT-23		-
2 SK 323	Hit	N-FET	SMD, Uni, 40V, 30mA, Idss=1.6...12mA, Up=0.13...1.5V	35f	SOT-23		2SK1576
2 SK 324	Tos	MOS-N-FET-e	VFET, 400/20V, 10A, 120W, on<0.6 $\Omega$ , 80/350ns	23a	TO-3		BUZ45, BUZ64, 2SK312...313, 2SK2361...62++
2 SK 325	Tos	MOS-N-FET-e	=2SK324: 450/20V, on<0.7 $\Omega$	23a	TO-3		BUZ45, BUZ339, 2SK313, 2SK724, 2SK2361++
2 SK 330	Tos	N-FET	Uni, 50V, Idss=1.2...14mA, Up=0.7...6V	(2SJ105) 41e			2N5457, 2SK246
2 SK 331	Say	N-FET	LF(Mic) Inp, 20V, Idss=0.06...0.8mA, Zin=20m $\Omega$				-
2 SK 332	Say	N-FET	Dual, 40V, 20mA, Idss=1.2...12mA, Up=0.5V				-
2 SK 333	Say	N-FET	Dual, 80V, 20mA, Idss=1.2...12mA, Up<3V				-
2 SK 334	Say	N-FET	=2SK331: SMD	=35f			-
2 SK 336	Say	MOS-N-FET-e	Uni, 50/12V, 0.4A, 0.6W, on=12 $\Omega$	7d	TO-92		-
2 SK 337	Nec	MOS-N-FET-e	VFET, 500/20V, $\pm$ 0.1A, 10W, on<100 $\Omega$ (20mA), 17/210ns	14j	TO-126		-
2 SK 338	Nec	MOS-N-FET-e	VFET, 400/20V, $\pm$ 5/7.5A, 40W, on<1.5 $\Omega$ (2A), 50/35ns	17c	TO-220		BUZ 41A...42, BUZ 60, IRF 830, 2SK1246,++
2 SK 339	Nec	MOS-N-FET-e	VFET, 100/20V, $\pm$ 5/7.5A, 40W, on<0.5 $\Omega$ (3A), 40/45ns	17c	TO-220		IRF510, IRF512, 2SK628, 2SK917, 2SK920
2 SK 343	Hit	MOS-N-FET-e	VFET, 140/20V, 8A, 100W, on<0.5 $\Omega$ , 100/90ns	(2SJ99) 20p			(2SK226...227) <sup>5</sup>
2 SK 344	Hit	MOS-N-FET-e	=2SK343: 160/20V	(2SJ100) 20p			(2SK227) <sup>5</sup>
2 SK 345	Hit	MOS-N-FET-e	VFET, 40/20V, 5A, 30W, on<0.4 $\Omega$ , 40/70ns	(2SJ101) 17p	TO-220		IRF510...13, 2SK463, 2SK917, 2SK920,++
2 SK 346	Hit	MOS-N-FET-e	=2SK345: 60/20V	(2SJ102) 17p	TO-220		IRF510...13, 2SK463, 2SK917, 2SK920,++
2 SK 347(L,S)	Hit	MOS-N-FET-e	VFET, 400/20V, 1A, 10W	30p	TO-251,252		2SK535, 2SK579...580, 2SK945, 2SK1151,++
2 SK 349	Hit	MOS-N-FET-e	VFET, 400/20V, 10A, 100W, on<0.9 $\Omega$ , 70/200ns	18p	TO-3P		BUZ 326, BUZ 351, 2SK1752, 2SK1785,++
2 SK 350	Hit	MOS-N-FET-e	=2SK349: 450/20V	18p	TO-3P		BUZ 339, 2SK896, 2SK1752, 2SK1785,++
2 SK 351	Hit	MOS-N-FET-e	VFET, 800/20V, 5A, 125W, on=1.7<3 $\Omega$ , 100/300ns	23a	TO-3		BUZ 54, BUZ 84, 2SK793, 2SK1213, 2SK1403
2 SK 352	Hit	MOS-N-FET-e	VFET, 250/15V, 0.3A, 8W, 30 $\Omega$	14b(j)	TO-126		BST 78, 2SK511
2 SK 353	Nec	GaAs-N-FET	UHF, C...Ku-Band, 5V, 120mA, Idss=20...120mA Up=0.5...6V, F=2.3/Gp=8dB(15GHz)	52(SGSD)	SOT-100		-
2 SK 354(A)	Nec	GaAs-N-FET	UHF, C-Band, 5V, 150mA, Idss=30...150mA, Up=0.8...6V F=2/Gp=10dB(8GHz)	52(SGSD)	SOT-100		-
2 SK 355	Tos	MOS-N-FET-e	VFET, 150/20V, 12/40A, 120W,<0.18 $\Omega$ (10A), 150/300ns	23a	TO-3		BUZ 35, 2N6765, 2SK401, 2SK1529
2 SK 356	Tos	MOS-N-FET-e	VFET, 250/20V, 12/30A, 120W,<0.25 $\Omega$ (10A), 130/320ns	23a	TO-3		BUZ 64, BUZ 325...26, 2SK401, 2SK412
2 SK 357	Tos	MOS-N-FET-e	VFET, 150/20V, 5/8A, 40W, on<0.9(3A), 40/60ns	17p	TO-220		BUZ60, IRF624, 2SK924, 2SK1391, 2SK1921
2 SK 358	Tos	MOS-N-FET-e	VFET, 250/20V, 5/8A, 40W, on<1 $\Omega$ (3A), 30/80ns	17p	TO-220		BUZ60, IRF624, 2SK924, 2SK1391, 2SK1921
2 SK 359	Hit	MOS-N-FET-d	VHF, 20/5V, $\pm$ 30mA, Idss=4...12mA, Up=0...2V F=2/Gp=30dB(100MHz)	7i	TO-92		-
2 SK 360	Hit	MOS-N-FET-d	=2SK359: SMD	35c, 35d	SOT-23		-
2 SK 362	Tos	N-FET	Uni, 50V, Idss=1.2...14mA, Up=0.25...1.5V	7a	TO-92		2SK163, 2SK365
2 SK 363	Tos	N-FET	Uni, 40V, Idss=5...30mA, Up=0.3...1.2V	(2SJ110) 7a	TO-92		2N5247, 2SK130, 2SK147, 2SK151, 2SK162
2 SK 364	Tos	N-FET	Uni, 40V, Idss=2.6...20mA, Up=0.2...1.5V	(2SJ104) 7a	TO-92		2SK187, 2SK366
2 SK 365	Tos	N-FET	=2SK362:	41a			2SK163, 2SK362
2 SK 366	Tos	N-FET	=2SK364:	(2SJ107) 41a			2SK187, 2SK364
2 SK 367	Tos	N-FET	Uni, In, 100V, Idss=0.6...6.5mA, Up=0.4...3.5V	41a			-
2 SK 368	Tos	N-FET	=2SK367: SMD	35e	SOT-23		-
2 SK 369	Tos	N-FET	=2SK363: In	(2SJ111) 7a	TO-92		=2SK363
2 SK 370	Tos	N-FET	=2SK364: In	(2SJ108) 41a			=2SK364
2 SK 371	Tos	N-FET	=2SK363: In	41a			=2SK363
2 SK 372	Tos	N-FET	=2SK363:	41a			=2SK363
2 SK 373	Tos	N-FET	=2SK367:	7a	TO-92		=2SK367

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 374	Mat	N-FET	SMD, Uni, 55V, 30mA, Idss=1...20mA, Up<5V	35f		SOT-23	2SK1682
2 SK 375	Hit	MOS-N-FET-e	VFET, 300/20V, 1A, 10W, on<4 $\Omega$ , 20/70ns	30c		TO-251,252	2SK535, 2SK945, 2SK1151, 2SK1672,++
2 SK 376	Say	N-FET	LF(Mic) Inp, 20V, Idss=0.06...0.8mA, Zin>18M $\Omega$	41e			-
2 SK 377	Say	N-FET	=2SK376				-
2 SK 378	Mat	GaAs-N-FET	UHF, 5V, 130mA, Idss=15...130mA, Up<4V F<3/Gp=10dB(800MHz)	24f		SOT-37	-
2 SK 379	Mat	MOS-N-FET-e	VFET, 400/20V, 8A, 100W, on<1.5 $\Omega$	23a		TO-3	IRF840, 2SK554...55, 2SK636, 2SK1495...96+
2 SK 380	Mat	MOS-N-FET-e	=2SK379: 450/20V, on<2 $\Omega$	23a		TO-3	IRF840, 2SK554...55, 2SK636, 2SK1495...96+
2 SK 381	Mit	N-FET	Uni, 50V, Idss=0.3...12mA, Up=0.3...6V	[2SJ40] 41a			2N3369
2 SK 382	Hit	MOS-N-FET-e	VFET, 500/20V, 2A, 30W, on<4 $\Omega$ , 25/70ns	17p		TO-220	BUZ 40, BUZ 74, IRF 820...821, 2SK892,++
2 SK 383	Hit	MOS-N-FET-e	VFET, 100/20V, 10A, 50W, on<0.18 $\Omega$ , 60/150ns	17p		TO-220	BUZ 20, BUZ 72, IRF 532, 2SK918, 2SK921+
2 SK 384	Hit	MOS-N-FET-e	VFET, 500/20V, 0.3A, 10W, on<50 $\Omega$ , 20/20ns	30p		TO-251,252	-
2 SK 385	Tos	MOS-N-FET-e	VFET, 400/20V, 10/15A, 120W, on<0.6 $\Omega$ (5A), 80/350ns	77p		TOP-3L	2SK693...694
2 SK 386	Tos	MOS-N-FET-e	=2SK385: 450/20V, on<0.7 $\Omega$ (5A)	77p		TOP-3L	2SK693...694
2 SK 387	Tos	MOS-N-FET-e	VFET, 150/20V, 12/40A, 150W, <0.18 $\Omega$ (10A), 150/300ns	77p		TOP-3L	2SK1530
2 SK 388	Tos	MOS-N-FET-e	=2SK387: 250/20V, on<0.25 $\Omega$ (10A)	77p		TOP-3L	2SK1530
2 SK 389	Tos	N-FET	Dual, 50V, Idss=2.6...20, Up=0.2...2V	[2SJ109] 7-5QP		(DGSsSGD)	-
2 SK 398	Hit	MOS-N-FET-e	VFET, 100/20V, 10/15A, 100W, <0.25 $\Omega$ (5A), 50/110ns	23a		TO-3	BUZ 23, 2SK631, 2SK633, 2SK1529
2 SK 399	Hit	MOS-N-FET-e	=2SK398: [2SJ112...113]	18p		TO-3P	2SK631, 2SK633, 2SK1529
2 SK 400	Hit	MOS-N-FET-e	VFET, 200/20V, 8/12A, 100W, on<0.7 $\Omega$ (4A), 40/110ns	18p		TO-3P	2SK412, 2SK633
			[2SJ114]				
2 SK 401	Hit	MOS-N-FET-e	VFET, 250/20V, 10A, 100W, on<0.4 $\Omega$ , 65/180ns	23a		TO-3	BUZ 64, 2SK312...313, 2SK573, 2SK1401
2 SK 402	Hit	MOS-N-FET-e	VFET, 400/20V, 8A, 100W, on<1.75 $\Omega$ , 50/120ns	18p		TO-3P	BUZ330...31, BUZ353...54, 2SK501, 2SK2361+
2 SK 403	Hit	MOS-N-FET-e	=2SK402: 450/20V	18p		TO-3P	BUZ330...31, BUZ353...54, 2SK557, 2SK2361+
2 SK 404	Say	N-FET	Uni, In, 20V, 20mA, Idss=1.2...12mA, Up<2V	40e			BC 264A, BFW 12, 2N4340, 2N5484, ++
2 SK 405	Tos	MOS-N-FET-e	VFET, 160/20V, 8A, 100W, on<1.4 $\Omega$ (5A)	[2SJ115] 18p		TO-3P	2SK1529
2 SK 406	Nec	GaAs-N-FET	UHF, C...Ku-Band, 5V, 120mA, Idss=20...120mA Up=0.5...3.5V, F=2,1/Gp=8.5dB(18GHz)	52(SGSD)		SOT-100	-
2 SK 407	Nec	GaAs-N-FET	=2SK406: F=1,9/Gp=8.5dB(18GHz)	52(SGSD)		SOT-100	-
2 SK 408	Hit	MOS-N-FET-e*	VFET, AM P, 180/20V, 2A, on<9 $\Omega$ , PQ>10W(28MHz)	17d		TO-220	-
2 SK 409	Hit	MOS-N-FET-e	=2SK408:	17f		TO-220	-
2 SK 410	Hit	MOS-N-FET-e	VFET, AM P, 180/20V, 8A, on<1.5 $\Omega$ , PQ>140W(28MHz)	57(SGSD)		SOT-119	-
2 SK 411	Hit	MOS-N-FET-e	VFET, 600/20V, 5A, 100W	23a		TO-3	BUZ 54, BUZ 84, 2SK351, 2SK793, 2SK1403+
2 SK 412	Hit	MOS-N-FET-e	VFET, 250/20V, 10A, 100W, on<0.4 $\Omega$ , 65/180ns	18p		TO-3P	BUZ 326, BUZ 351, 2SK573, 2SK1401
2 SK 413	Hit	MOS-N-FET-e	VFET, 140/20V, 8/12A, 100W, on<0.5 $\Omega$ (4A), 50/110ns	18p		TO-3P	2SK400, 2SK405, 2SK631, 2SK633, 2SK1529
2 SK 414	Hit	MOS-N-FET-e	=2SK413: 160/20V	[2SJ118...119] 18p		TO-3P	2SK400, 2SK405, 2SK633, 2SK1529
2 SK 415	Hit	MOS-N-FET-e	VFET, 800/20V, 3A, 100W, on<6 $\Omega$ , 50/120ns	18p		TO-3P	BUZ 307, 2SK603, 2SK726, 2SK954, 2SK1339
2 SK 416	Hit	MOS-N-FET-e	VFET, 40/20V, 2/4A, 10W, <0.8 $\Omega$ (1A), 25/35ns	[2SJ120] 30p		TO-251,252	2SK468, 2SK1282, 2SK1763, 2SK1973,++
2 SK 417	Tos	MOS-N-FET-e	VFET, 60/20V, 10A, 60W, on<0.14 $\Omega$ , 120/160ns	=15p			BUZ20, BUZ72, 2SK442, 2SK672, 2SK1114,++
2 SK 418	Tos	MOS-N-FET-e	VFET, 400/20V, 2A, 50W, on<2.2 $\Omega$ , 30/100ns	=15p			BUZ 40, IRF 710, IRF 820, 2SK382, 2SK892
2 SK 419	Tos	MOS-N-FET-e	=2SK418: 450/20V, <2.5 $\Omega$	=15p			BUZ 40, IRF 820, IRF 822, 2SK382, 2SK892
2 SK 420	Tos	MOS-N-FET-e	VFET, 400/20V, 5A, 60W, on<1.4 $\Omega$ , 40/140ns	=15p			BUZ 41A...42, 2SK1440, 2SK2355...56,++
2 SK 421	Tos	MOS-N-FET-e	=2SK420: 450/20V, <1.6 $\Omega$	=15p			BUZ 41A...42, 2SK1440, 2SK2355...56,++
2 SK 422	Tos	MOS-N-FET-e	VFET, 60/20V, 0.7/1A, 0.9W, <2.8 $\Omega$ (0.5A), 17/12ns	7c(9mm)		TO-92L	BST 70, 2SK940...941, 2SK975, 2SK1274,++
2 SK 423	Tos	MOS-N-FET-e	VFET, 100/20V, 0.5/0.8A, 0.9W, <4.5 $\Omega$ (0.3A), 15/20ns	7c(9mm)		TO-92L	BSS 296, 2SK941, 2SK1484, 2SK1729
2 SK 424	Nec	MOS-N-FET-e	VFET, 600/20V, 3/5A, 100W, on<1.5 $\Omega$ (2A), 20/150ns	23a		TO-3	BUZ 53, BUZ 83, BUZ 307, 2SK954
2 SK 425	Nec	N-FET	SMD, 50V, 30mA, Idss=1...18mA, Up=0.2...1.2V	35f		SOT-23	-
2 SK 426	Nec	N-FET	=2SK425: In	35f		SOT-23	-
2 SK 427	Say	N-FET	AM Inp, Mx, Os, 15V, 20mA, Idss=1.2...12mA, Up<1.5V	40e			2SK186
2 SK 428	Hit	MOS-N-FET-e	VFET, 60/20V, 10A, 50W, on<0.15 $\Omega$ , 60/120ns	[2SJ122] 17c		TO-220	BUZ 20, BUZ 72, IRF 533, 2SK442, 2SK672+
2 SK 429(L,S)	Hit	MOS-N-FET-e	VFET, 100/20V, 3/6A, 20W, on<0.7 $\Omega$ (2A), 35/50ns	30c		TO-251,252	2SK1113, 2SK1299, 2SK1254, 2SK1284
2 SK 430(L,S)	Hit	MOS-N-FET-e	=2SK429: 150/20V, on<1 $\Omega$ (2A)	30p		TO-251,252	2SK1335, 2SK2015
2 SK 431	Hit	N-FET	SMD, LF In, 40V, Idss=2.5...20mA, Up=0.13...1.5V	35f, 35a		SOT-23	-
2 SK 432	Nec	MOS-N-FET-e	VFET, 250/20V, $\pm$ 10/15A, 120W, <0.4 $\Omega$ (3A), 65/100ns	23a		TO-3	BUZ 45, BUZ 64, 2SK401, 2SK512, 2SK634
2 SK 433	Mit	N-FET	SMD, Analog-S, 50V, Idss=0.3...12mA, Up=0.3...6V	35f		SOT-23	-
2 SK 435	Hit	N-FET	LF, HF, 22V, 0.1A, Idss=6...40mA, Up<2.5V	7d		TO-92	2SK494
2 SK 436	Say	N-FET	=2SK427: SMD	35f		SOT-23	2SK425
2 SK 437	Mat	GaAs-N-FET	SHF Tuner, 6V, 150mA, Idss=20...120mA, Up<3.5V F<2,3/Gp=10.5dB(12GHz)	52(SGSD)		SOT-100	-
2 SK 438	Mat	GaAs-N-FET	SHF Tuner, 6V, 120mA, Idss=20...120mA, Up<3.5V Gp=10.5dB(12GHz)	52(SGSD)		SOT-100	-
2 SK 439	Hit	MOS-N-FET-d	FM/VHF, 20/5V, 30mA, Idss=4...12mA, Up=0...2V F=2/Gp=30dB(100MHz)	41f		(SPAK)	-
2 SK 440	Hit	MOS-N-FET-e	VFET, 200/20V, 6A, 40W, on<0.5 $\Omega$ , 40/110ns	17p		TO-220	BUZ 30, BUZ 73, 2SK741, 2SK1319...20,++
2 SK 441	Hit	MOS-N-FET-e	VFET, 500/20V, 0.3A, 0.75W, on<50 $\Omega$	2a		TO-39	(2SK384) <sup>4</sup>
2 SK 442	Tos	MOS-N-FET-e	VFET, 70/20V, 10A, 30W, on<0.4 $\Omega$	[2SJ123] 35f		TO-220	BUZ 20, BUZ 72, IRF 532, 2SK740, 2SK918
2 SK 443	Say	N-FET	=2SK444: SMD	35f		SOT-23	BF 512...513, 2SK322
2 SK 444	Say	N-FET	Uni, In, 15V, 50mA, Idss=5...38mA, Up<2V	40e			BC 264C...D, BF 410C...D, 2SK147, 2SK168
2 SK 445	Say	N-FET	=2SK444:	7d		TO-92	=2SK444
2 SK 446	Nec	MOS-N-FET-e	VFET, 20/20V, $\pm$ 2/4A, 20W, on<0.5 $\Omega$ (3A), 50/30ns	30p		TO-251/252	2SK416, 2SK973, 2SK1763, 2SK1973,++
2 SK 447	Tos	MOS-N-FET-e	VFET, 250/20V, $\pm$ 15/30A, 150W, <0.24 $\Omega$ (15A), 350/600ns	77p		TOP-3L	2SK678, 2SK693, 2SK1333
2 SK 448	Nec	MOS-N-FET-e	VFET, 250/20V, $\pm$ 10/15A, 120W, <0.5 $\Omega$ (3A), 65/100ns	23a		TO-3	BUZ 325, BUZ 64, 2SK312, 2SK401, 2SK412
2 SK 449	Nec	MOS-N-FET-e	VFET, 450/20V, $\pm$ 8/12A, 120W, <1.25 $\Omega$ (3A), 30/140ns	23a		TO-3	BUZ 45, BUZ 330...331, 2SK312, 2SK512
2 SK 453	Nec	MOS-N-FET-e	VFET, VHF P, 100/20V, 10A, PQ=120W(100MHz)	57(SGSD)		SOT-119	-
2 SK 454	Nec	MOS-N-FET-e	VFET, VHF P, 200/20V, 8A, PQ=140W(100MHz)	57(SGSD)		SOT-119	-
2 SK 455	Tos	N-FET	=2SK456: SMD	=35f			-
2 SK 456	Tos	N-FET	LF Inp, 20V, Idss=0.06...0.5mA, Up=0.15...0.8V				-
2 SK 457	Hit	GaAs-N-FET	UHF, 5V, 120mA, Idss=20...130mA, Up<5V, 3GHz F=2,1/Gp=10dB(3GHz)	25(GSDS)		SOT-103	-
2 SK 458	Nec	MOS-N-FET-e	VFET, 150/20V, $\pm$ 1/1.5A, 0.7W, 16W(Tc=25 $^{\circ}$ ) on<1.5 $\Omega$ (0.5A), 30/40ns	2a		TO-39	-
2 SK 459	Nec	MOS-N-FET-e	VFET, 200/20V, $\pm$ 10/15A, 60W, on<0.5 $\Omega$ (3A), 50/40ns	17p		TO-220	BUZ 31...32, 2SK890, 2SK925, 2SK1393,++
2 SK 462	Nec	MOS-N-FET-e	VFET, 60/20V, $\pm$ 2/3A, 20W, on<0.5 $\Omega$ (1A), 40/35ns	30p		TO-251/252	2SK468, 2SK612, 2SK973, 2SK1282, 2SK1973
2 SK 463	Nec	MOS-N-FET-e	VFET, 60/20V, $\pm$ 5/7.5A, 40W, on<0.3 $\Omega$ (3A), 35/35ns	17p		TO-220	IRF 511, IRF 513, 2SK628, 2SK917, 2SK991
2 SK 464	Nec	MOS-N-FET-e	VFET, 60/20V, $\pm$ 8/12A, 50W, <0.2 $\Omega$ (4A), 35/35ns	17p		TO-220	IRF 521, IRF 523, 2SK470, 2SK993
2 SK 468	Nec	MOS-N-FET-e	VFET, 100/20V, $\pm$ 2/3A, 20W, <1 $\Omega$ (1A), 40/35ns	30p		TO-251/252	2SK612, 2SK1113, 2SK1254, 2SK1299,++
2 SK 470	Nec	MOS-N-FET-e	VFET, 100/20V, $\pm$ 8A, 50W, on<0.3 $\Omega$ (4A), 35/35ns	17p		TO-220	BUZ 30, BUZ 73, IRF 520, IRF 522
2 SK 477	Nec	MOS-N-FET-e	VFET, 250/20V, $\pm$ 8/12A, 60W, on<0.8 $\Omega$ (3A), 50/30ns	17p		TO-220	IRF 634, 2SK1319...20, 2SK1400, 2SK1667
2 SK 479	Nec	MOS-N-FET-e	VFET, 250/20V, $\pm$ 15A, 100W, <0.4 $\Omega$ (6A), 55/60ns	16p		(MP-80)	BUZ323, 2SK559, 2SK573, 2SK1135, 2SK1401
2 SK 482	Nec	MOS-N-FET-e	VFET, 450/20V, $\pm$ 5/7.5A, 50W, on<2 $\Omega$ (2A), 35/35ns	17p		TO-220	BUZ 41A...42, IRF 830, 2SK1246, 2SK1440++
2 SK 484	Nec	MOS-N-FET-e	VFET, 450/20V, $\pm$ 8A, 100W, on<1 $\Omega$	16p		(MP-80)	BUZ 330...331, 2SK559, 2SK634, 2SK1488,++
2 SK 490	Nec	MOS-N-FET-e	VFET, 400/20V, $\pm$ 10A, 100W, on<0.8 $\Omega$	16p		(MP-80)	BUZ 325...326, 2SK559, 2SK634, 2SK1488,++
2 SK 492	Mit	N-FET	SMD, Uni, 50V, Idss=1...12mA, Up=0.1...2V	35f		SOT-23	-

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 493	Say	N-FET	Video-Camera, 15V, 50mA, Idss=5...38mA, Up<2.2V	7d		TO-92	BC 264C...D, BF 410C...D, 2SK147, 2SK168
2 SK 494	Hit	N-FET	=2SK435:	41a		(SPAK)	-2SK435
2 SK 495	Mat	MOS-N-FET-e	VFET, 60/20V, 5A, 40W, on<0.3 $\Omega$ , 30/40ns	17p		TO-220	IRF 511, IRF 513, 2SK917, 2SK920,++
2 SK 496	Mat	MOS-N-FET-e	=2SK495: Iso	17c		TO-220 Iso	BUK 441-60, 2SK499, 2SK705, 2SK1255
2 SK 497	Mat	MOS-N-FET-e	VFET, 50/20V, 5A, 40W, on<0.25 $\Omega$ , 30/40ns	17p		TO-220	IRF 511, IRF 513, 2SK917, 2SK920,++
2 SK 498	Mat	MOS-N-FET-e	=2SK497:	30		TO-251/252	2SK1112, 2SK1471, 2SK1719, 2SK2231,++
2 SK 499	Mat	MOS-N-FET-e	=2SK497: Iso	17c		TO-220 Iso	BUK 441-60, 2SK496, 2SK705, 2SK1255
2 SK 500	Mat	MOS-N-FET-e	VFET, 60/20V, 10A, 80W, on<0.12 $\Omega$ , 120/250ns	18p		TO-3P	2SK399, 2SK631
2 SK 501	Mat	MOS-N-FET-e	VFET, 400/20V, 8A, 80W, on<1.2 $\Omega$ , 55/40ns	18p		TO-3P	BUZ 330...331, BUZ 385
2 SK 502	Mat	MOS-N-FET-e	VFET, 400/20V, 3A, 40W, on<4 $\Omega$ , 35/15ns	17p		TO-220	BUZ 76, IRF 720, IRF 722, 2SK1244,++
2 SK 503	Mat	MOS-N-FET-e	=2SK502: Iso	17c		TO-220 Iso	BUK 445-450, 2SK1444, 2SK1862...63,++
2 SK 505	Nec	N-FET	Video, 15V, 50mA, Idss=10...50mA, Up=0...3.5V	7d		TO-92	2SK507
2 SK 507	Nec	N-FET	=2SK505:	40a		(SST)	2SK505
2 SK 508	Nec	N-FET	=2SK505: SMD	35f		SOT-23	-
2 SK 511	Hit	MOS-N-FET-e*	VFET, Vid Out, hi-res, 250/9V, 0.3A, 8W, <50 $\Omega$ (0.1A)	14b(j)		TO-126	-
2 SK 512	Hit	MOS-N-FET-e	VFET, 500/20V, 12A, 125W, on<0.65 $\Omega$ , 75/300ns	23a		TO-3	BUZ 45, 2SK1488, 2SK1753, 2SK1785,++
2 SK 513	Hit	MOS-N-FET-e	VFET, 800/20V, 3A, 60W, on<6 $\Omega$ , 50/120ns	17p		TO-220	BUK 456/800, 2SK1600...1601, 2SK1638,++
2 SK 514	Nec	N-FET	Analog-S, 50V, 20mA, Idss=1...12mA, Up=0.5...4.5V	40a		(SST)	-
2 SK 515	Nec	N-FET	=2SK514: SMD	35f		SOT-23	2SK1682
2 SK 518	Nec	N-FET	AM Tuner, 30V, 0.05A, Idss=30...110mA, Up=1.5...9V	7a		TO-92	BF 244C, BF 245C, 2SK519
2 SK 519	Nec	N-FET	=2SK518:	40a		(SST)	BD 244C, BF 245C, 2SK518
2 SK 520	Nec	N-FET	=2SK518: SMD	35f		SOT-23	BF 545C
2 SK 521	Hit	N-FET	FM/VHF Mx.Os, 18V, 20mA, Idss=2...14mA, Up=0.3...5.5V	41f		(SPAK)	2SK107, BFS 71, 2N3822
2 SK 522	Hit	N-FET	FM/VHF Mx.Os, 30V, 20mA, Idss=4...20mA, Up<3V	41f		(SPAK)	BF 410C
2 SK 523	Nec	N-FET	LF, In, 50V, 30mA, Idss=1...18mA, Up=0.2...1.2V	7d		TO-92	-
2 SK 525	Tos	MOS-N-FET-e	VFET, 150/20V, 10/15A, 40W, on<0.28 $\Omega$ (5A), 85/160ns	17c		SOT-186	2SK1035...1036, 2SK2212
2 SK 526	Tos	MOS-N-FET-e	VFET, 250/20V, 10/15A, 40W, on<0.6 $\Omega$ (5A), 70/160ns	17c		SOT-186	2SK1036, 2SK1762, 2SK2011, 2SK2426
2 SK 527	Tos	MOS-N-FET-e	VFET, 60/20V, 10A, 40W, on<0.14 $\Omega$ (5A), 120/160ns	17c		SOT-186	BUK 442/60, 2SK1033, 2SK1093, 2SK1974,++
2 SK 528	Tos	MOS-N-FET-e	VFET, 400/20V, 2/4A, 30W, on<2.2 $\Omega$ (1A), 30/100ns	17c		SOT-186	BUK 444-400, 2SK1833, 2SK1988...89,++
2 SK 529	Tos	MOS-N-FET-e	=2SK528: 450/20V, on<2.6 $\Omega$ (1A)	17c		SOT-186	BUK 444-450, 2SK1833, 2SK1988...89,++
2 SK 530	Tos	MOS-N-FET-e	VFET, 400/20V, 5/8A, 40W, on<1.4 $\Omega$ (3A), 40/140ns	17c		SOT-186	2SK1231...32, 2SK1608, 2SK1990...91,++
2 SK 531	Tos	MOS-N-FET-e	=2SK530: 450/20V, on<1.6 $\Omega$ (3A)	17c		SOT-186	2SK1231...32, 2SK1608, 2SK1990...91,++
2 SK 532	Tos	MOS-N-FET-e	VFET, 60/20V, 12/25A, 40W, <0.085 $\Omega$ (6A), 120/190ns	17c		SOT-186	BUK 445/100, 2SK1094, 2SK1419, 2SK1896,++
2 SK 533	Nec	N-FET	=2SK523: Igss<100pA	7d		TO-92	-
2 SK 534	Hit	MOS-N-FET-e	VFET, 800/20V, 5A, 100W, on<4 $\Omega$ , 75/220ns	18p		TO-3P	BUZ 355...358, 2SK793, 2SK1341, 2SK1794,++
2 SK 535(L.S)	Hit	MOS-N-FET-e	VFET, 400/20V, 1.5A, 20W, on<6 $\Omega$ , 20/45ns	30p		TO-251.252	2SK579...80, 2SK945, 2SK1151...52, 2SK1672
2 SK 536	Say	MOS-N-FET-e	SMD, Analog-S, 50V, 0.1/0.3A, on=20 $\Omega$	35e		SOT-23	-
2 SK 537	Tos	MOS-N-FET-e	VFET, 900/20V, 1/3A, 60W, on<9 $\Omega$ (0.5A), 45/150ns	17p		TO-220	BUZ 50, 2SK1199, 2SK1338, 2SK1324
2 SK 538	Tos	MOS-N-FET-e	VFET, 900/20V, 3/5A, 100W, on<4.5 $\Omega$ (1.5A), 70/280ns	18p		TO-3P	BUZ 357...358, 2SK794, 2SK1339, 2SK1794,++
2 SK 539	Tos	MOS-N-FET-e	VFET, 900/20V, 5/10A, 150W, on<2.5 $\Omega$ (3A), 130/480ns	77p		TOP-3L	-
2 SK 541	Hit	N-FET	SMD, Video-Camera, 12V, $\pm$ 50mA, Idss=14...42mA	35f		SOT-23	-
2 SK 542	Nec	MOS-N-FET-e	VFET, 150/20V, $\pm$ 2A, 25W, <1.5 $\Omega$ (1A), 30/40ns	17p		TO-220	IRF 612...613, 2SK923, 2SK2251
2 SK 543	Say	MOS-N-FET-d	=2SK544: SMD	35e		SOT-23	BF 511
2 SK 544	Say	MOS-N-FET-d	FM/VHF, 20V, 30mA, Idss=1.2...12mA, Up<2.5V	40e			2N5484, 2SK192
2 SK 545	Say	N-FET	=2SK546: SMD	35f		SOT-23	-
2 SK 546	Say	N-FET	hi-ohm, 40V, 1mA, Idss=0.03...0.3mA, Up<4V	40e			-
2 SK 549	Hit	MOS-N-FET-e	VFET, 60/15V, 10A, 50W, on<0.15 $\Omega$ , 55/100ns	17p		TO-220	BUZ 20, BUZ 72, IRF 532...33, 2SK1114,++
2 SK 550	Hit	MOS-N-FET-e	VFET, 60/15V, 25A, 75W, on<0.045 $\Omega$ , 115/245ns	17p		TO-220	BUZ 21, IRF 541, IRF 543, 2SK1115...16,++
2 SK 551	Hit	MOS-N-FET-e*	VFET, 120/15V, 10A, 50W, <0.2 $\Omega$ (5A), 55/100ns	12SJ127		TO-220	BUZ 31...32, 2SK459, 2SK720, 2SK890
2 SK 552	Hit	MOS-N-FET-e*	VFET, 450/15V, 5/20A, 50W, <1.4 $\Omega$ (2.5A), 45/115ns	17p		TO-220	BUZ 41...42, BUZ 90, IRF 830, 2SK1246,++
2 SK 553	Hit	MOS-N-FET-e*	=2SK552: 500/15V	17p		TO-220	BUK 455/600A.B 17p
2 SK 554	Hit	MOS-N-FET-e*	VFET, 450/15V, 7/28A, 60W, on<0.85 $\Omega$ (4A), 65/155ns	17p		TO-220	BUK 657-500, IRF 840, 2SK894, 2SK1496,++
2 SK 555	Hit	MOS-N-FET-e*	=2SK554: 500/15V, on<1 $\Omega$ (4A)	17p		TO-220	BUK 657-500, IRF 840, 2SK894, 2SK1496,++
2 SK 556	Hit	MOS-N-FET-e*	VFET, 450/15V, 12/48A, 100W, <0.55 $\Omega$ (6A), 110/230ns	18p		TO-3P	2SK725, 2SK899, 2SK1610, 2SK1745,++
2 SK 557	Hit	MOS-N-FET-e*	=2SK556: 500/15V, on<0.6 $\Omega$ (6A)	18p		TO-3P	2SK725, 2SK899, 2SK1610, 2SK1745,++
2 SK 558	Hit	MOS-N-FET-e	VFET, 500/20V, 12A, 100W, on=0.6 $\Omega$ , 85/300ns	18p		TO-3P	2SK560, 2SK1516, 2SK1753, 2SK1785,++
2 SK 559	Hit	MOS-N-FET-e	VFET, 450/15V, 15/60A, 100W, <0.36 $\Omega$ (8A), 145/320ns	18p		TO-3P	2SK725, 2SK899, 2SK1745, 2SK1757,++
2 SK 560	Hit	MOS-N-FET-e*	=2SK559: 500/15V, on<0.4 $\Omega$ (8A)	18p		TO-3P	2SK725, 2SK899, 2SK1745, 2SK1757,++
2 SK 561	Hit	MOS-N-FET-e	VFET, 100/15V, 30A, 150W, on<0.07 $\Omega$ , 110/240ns	23a		TO-3	BUZ 24, 2N6764, 2SK850, 2SK906, 2SK1303,++
2 SK 562	Fjd	MOS-N-FET-e	VFET, 50/20V, 39A, 125W, on<0.04 $\Omega$	18p		TO-3P	BUZ 347...348, 2SK857, 2SK905, 2SK1124,++
2 SK 564	Fjd	MOS-N-FET-e	VFET, 100/20V, 32A, 125W, on<0.06 $\Omega$	18p		TP-3P	BUZ 349, 2SK906, 2SK1303, 2SK1433
2 SK 565	Fjd	MOS-N-FET-e	VFET, 500/20V, 9.6A, 125W, on<0.6 $\Omega$	18p		TO-3P	2SK637, 2SK1516, 2SK1753, 2SK1785,++
2 SK 566	Fjd	MOS-N-FET-e	VFET, 800/20V, 2.9A, 78W, on<4 $\Omega$	18p		TO-3P	2SK415, 2SK538, 2SK603, 2SK762, 2SK1339,++
2 SK 568	Tos	MOS-N-FET	VFET, 450/20V, $\pm$ 8/16A, 150W, <0.75 $\Omega$ (8A), 250/600ns	77p		TOP-3L	-
2 SK 569	Nec	GaAs-N-FET-d	UHF, Ku-Band, 6V, 60mA, Idss=15...60mA, Up=0.5...2V	52(SGSD)		SOT-100	-
2 SK 570(S)	Nec	GaAs-N-FET-d	UHF, Ku-Band, 6V, 50mA, Idss=12...50mA, Up=0.5...2V	52(SGSD)		SOT-100	-
2 SK 572	Tos	MOS-N-FET-e	VFET, 150/20V, 15/30A, 100W, <0.18 $\Omega$ (10A), 130/300ns	18p		TO-3P	BUZ 350, 2SK622, 2SK1267, 2SK1491,++
2 SK 573	Tos	MOS-N-FET-e	VFET, 250/20V, 15/25A, 100W, <0.32 $\Omega$ (10A), 130/300ns	18p		TO-3P	BUZ 323, 2SK1401, 2SK1641, 2SK2058,++
2 SK 575	Son	GaAs-N-FET-d	UHF, Ku-Band, 5V, 80mA, Idss=5...60mA, Up=0.5...3V	52(SGSD)		SOT-100	-
2 SK 578	Tos	MOS-N-FET-e	VFET, 150/20V, $\pm$ 15A, 120W, <0.22 $\Omega$ (15A), 500/300ns	77p		TOP-3L	-
2 SK 579(L.S)	Hit	MOS-N-FET-e*	VFET, 450/15V, 1.5/6A, 20W, on<5.5 $\Omega$ (1A), 28/48ns	30p		TO-251.252	2SK1151...52, 2SK1672, 2SK2017
2 SK 580(L.S)	Hit	MOS-N-FET-e*	=2SK579: 500/15V, on<6 $\Omega$ (1A)	30p		TO-251.252	2SK1152, 2SK1672, 2SK2017
2 SK 581	Son	N-FET	HF, In, 30V, Idss=0.9...15mA, Up=0.18...1.49V	41e			-
2 SK 582	Son	N-FET	VHF/UHF, 30V, 100mA, Idss=40...75mA, Up=2...6V	41e			-
2 SK 583	Say	MOS-N-FET-e	VFET, Analog-S, 50/12V, 0.2/0.3A, 0.6W, on=20 $\Omega$	7d		TO-92	BSS 100, BST 72, 2SK1398
2 SK 585	Son	GaAs-N-FET-d	UHF, X-Band, 5V, Idss=20...120mA, Up=1...4V	25		-SOT-103	-
2 SK 586	Son	GaAs-N-FET-d	F<5/Gp=9dB(12GHz)				-
2 SK 587	Son	GaAs-N-FET-d	UHF, Ku-Band, 5V, Idss=2...80mA, Up=0.2...3V	52(SGSD)		SOT-100	-
2 SK 588	Son	GaAs-N-FET-d	F<2/Gp=10dB(12GHz)				-
2 SK 589	Son	GaAs-N-FET-d	UHF, X-Band, 5V, Idss=2...80mA, Up=0.2...3V	25		-SOT-103	-
2 SK 590	Tos	GaAs-N-FET-d	VHF/UHF, 10V, 80mA, Idss=20...80mA, Up<4V	25(SGSD)		-SOT-103	-
2 SK 591	Nec	MOS-N-FET-e	VFET, LogL, 60/20V, $\pm$ 15/60A, 35W, on<55m $\Omega$ (6A)	17c		SOT-186	2SK1094, 2SK1286

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 593	Mat	GaAs-N-FET-d	VHF/UHF, 5V, 50mA, Idss=15...50mA, Up<4V F<5/Gp=8dB(800MHz)	25(G-DS)			~SOT-103
2 SK 595	Say	N-FET	=2SK596: SMD	-35f			-
2 SK 596	Say	N-FET	C-Mic, 20V, Idss=0.1...0.8mA, Up<1.5V	41e			-
2 SK 597	Say	N-FET	=2SK596				-
2 SK 600	Hit	MOS-N-FET-e	VFET, 60/15V, 25A, 75W, on<0.055Ω	17p		TO-220	BUZ 21, IRF 540...543, 2SK942, 2SK1115, ++
2 SK 601	Mat	MOS-N-FET-e	SMD, VFET, 80/20V, 0.5/1A, 1W, <4Ω(0.5A), 15/20ns	39b		SOT-89	BST 80, 2SK1078...1079, 2SK1593, 2SK2110
2 SK 602	Mat	MOS-N-FET-e	VFET, 800/20V, 1A, 40W, on<8Ω	17c		SOT-186	BUZ 78, 2SK537
2 SK 603	Mat	MOS-N-FET-e	VFET, 800/20V, 3A, 80W, on<5Ω	16c(p)		(TOP-3F)	BUZ 307, 2SK726, 2SK954, 2SK1339, ++
2 SK 604	Mat	MOS-N-FET-e	VFET, 800/20V, 5A, 80W, on<3.5Ω	16c(p)		(TOP-3F)	BUZ355...57, 2SK695, 2SK793, 2SK1461, ++
2 SK 606	Mat	N-FET	FM Tuner, 30V, 20mA, Idss=0.5...20mA, Up<3V F<4/Gp=25dB(100MHz)	7f		TO-92	2SK193, 2SK195
2 SK 607	Mat	N-FET	=2SK606:	40d			2SK193, 2SK195
2 SK 608	Mat	N-FET	=2SK606: SMD	35c		SOT-23	2SK968
2 SK 609	Nec	GaAs-N-FET-d	UHF/C... Ku-Band, 6V, 120mA, Idss=20...120mA Up=0.5...3.5V, F<1.8/Gp=10dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 610	Mat	MOS-N-FET-e	VFET, 400/20V, 3A, 80W, on<4Ω	16c(p)		(TOP-3F)	BUZ 307, 2SK415, 2SK635, 2SK954
2 SK 611(Z)	Nec	MOS-N-FET-e	VFET, 100/20V, ±1/3A, 10W, on<5Ω(0.5A), 12/15ns	30p		TO-251	2SK468, 2SK2014
2 SK 612(Z)	Nec	MOS-N-FET-e	VFET, 100/20V, ±2/8A, 20W, on<0.45Ω(1A), 30/100ns	30p		Z: TO-252	2SK468, 2SK429...430, 2SK699, 2SK1283
2 SK 613	Son	N-FET	SMD, Camera, 15V, 50mA, Idss=13.4...42mA Up=0.65...2V, F=1.8/Gp=14dB(100MHz)	35f		SOT-23	-
2 SK 614	Mat	MOS-N-FET-e	VFET, 80/20V, 0.5/1A, 0.75W, on<4Ω(0.5A), 15/20ns	7c		TO-92	BST 70, 2SK423, 2SK940...941, 2SK1729, ++
2 SK 615	Mat	MOS-N-FET-e	=2SK614: 1W	9c			BST 70, 2SK423, 2SK940...941, 2SK1729, ++
2 SK 616	Fjd	MOS-N-FET-e	VFET, 200/20V, 22A, 125W, on<0.12Ω	18p		TO-3P	BUZ 350, 2SK1491, 2SK2007, 2SK2058, ++
2 SK 617	Mat	MOS-N-FET-e	VFET, 800/20V, 1A, 40W, on<8Ω				-
2 SK 618	Tos	GaAs-N-FET-d	SMD, VHF/UHF, 10V, 80mA, Idss=20...80mA, Up<4V F<2.5/Gp=19dB(1GHz)	35e		SOT-23	-
2 SK 619	Hit	MOS-N-FET-e*	VFET, HF, Video, 70/+9-6V, 0.3/0.5A, 10W	14f(S=case)		TO-126	-
2 SK 620	Mat	MOS-N-FET-e	SMD, VFET, int. Diode(S +G), 50/8V, 0.1/0.2A on<50Ω(20mA), 10/20ns	35a		SOT-23	-
2 SK 621	Mat	MOS-N-FET-e	SMD, VFET, int. Di+R(S +G), 20/8V, 0.1/0.2A, <1/1μs on<50Ω(20mA), Rg/Rgs=1/50	35a		SOT-23	-
2 SK 622	Hit	MOS-N-FET-e*	VFET, 150/20V, 20/80A, 120W, <75mΩ(10A), 225/360ns	18p		TO-3P	BUZ 350, 2SK1267, 2SK1491, 2SK2007, ++
2 SK 623	Hit	MOS-N-FET-e*	VFET, 250/20V, 20/80A, 120W, <0.15(10A), 225/360ns	18p		TO-3P	2SK1491, 2SK2007, 2SK2058, 2SK2075, ++
2 SK 624	Mat	N-FET	LF Inp In, C-Mic, 20V, 2mA, Idss=95...385μA	40e			-
2 SK 625	Tos	N-FET	SMD, C-Mic, 20V, Idss=0.06...0.5mA, Up=0.15...0.8V	35f		SOT-23	-
2 SK 626	Mat	MOS-N-FET-e	VFET, 30V, 20A, 80W, on<0.07Ω	16c(p)		(TOP-3F)	BUZ 350, 2SK1267
2 SK 627	Mat	MOS-N-FET-e	=2SK626: 50V	16c(p)		(TOP-3F)	BUZ 350, 2SK1267
2 SK 628	Mat	MOS-N-FET-e	VFET, 100V, 5A, 40W, on<0.4Ω	17c		SOT-186	BUK442-100, BUK542-100, 2SK992, 2SK1260+
2 SK 629	Mat	MOS-N-FET-e	VFET, 100V, 20A, 80W, on<0.1Ω	16c(p)		(TOP-3F)	2SK622, 2SK1267
2 SK 630	Mat	MOS-N-FET-e	VFET, S P, 160V, 5A, 40W, on<0.5Ω	16c(p)		(TOP-3F)	-
2 SK 631	Mat	MOS-N-FET-e	VFET, 160V, 10A, 80W, on<0.2Ω	16c(p)		(TOP-3F)	2SK633, 2SK1529
2 SK 632	Mat	MOS-N-FET-e	VFET, 200V, 5A, 40W, on<1.2Ω	16c(p)		(TOP-3F)	-
2 SK 633	Mat	MOS-N-FET-e	VFET, 200V, 10A, 80W, on<0.25Ω	16c(p)		(TOP-3F)	2SK412
2 SK 634	Mat	MOS-N-FET-e	VFET, 400V, 10A, 80W, on<0.7Ω	16c(p)		(TOP-3F)	BUZ 326, BUZ 351, 2SK559, 2SK1516
2 SK 635	Mat	MOS-N-FET-e	VFET, 500V, 3A, 40W, on<4.5Ω	16c(p)		(TOP-3F)	BUZ 307, 2SK415, 2SK954
2 SK 636	Mat	MOS-N-FET-e	VFET, 500V, 8A, 80W, on<1.4Ω	16c(p)		(TOP-3F)	BUZ 330...331, BUZ 353...354
2 SK 637	Mat	MOS-N-FET-e	VFET, 500V, 10A, 80W, on<1.4Ω	16c(p)		(TOP-3F)	2SK557, 2SK644, 2SK1488, 2SK1753, ++
2 SK 638	Mat	MOS-N-FET-e	VFET, 800V, 3A, 80W, on<5Ω	18p		TO-3P	BUZ 307, 2SK538, 2SK603, 2SK726, 2SK1339
2 SK 641	Hit	MOS-N-FET-e*	VFET, 450/15V, 10/30A, 100W, on<0.8Ω(5A), 70/160ns	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1752, ++
2 SK 642	Hit	MOS-N-FET-e*	=2SK641: 500/15V, on<1Ω(5A)	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1753, ++
2 SK 643	Tos	MOS-N-FET-e	VFET, 450/20V, 10/40A, 125W, on<0.8Ω(5A), 50/200ns	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1752, ++
2 SK 644	Tos	MOS-N-FET-e	=2SK643: 500/20V, <1Ω(5A)	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1753, ++
2 SK 645	Tos	N-FET*	C-Mic, 15V, Id=100...315μA, Zin=200MΩ, Ur<40mV				-
2 SK 646	Hit	MOS-N-FET-e	VFET, 1200/20V, 4A, 125W, on<4Ω, 80/350ns	23a		TO-3	2SK1835
2 SK 647	Mat	GaAs-N-FET	GaAsSB, UHF, 6V, 120mA, Idss=20...120mA Up=0.5...3.5V, F<1.8dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 648	Mat	GaAs-N-FET	GaAsSB, UHF, 6V, 120mA, Idss=20...120mA Up=0.5...3.5V, F<2.3dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 649	Mat	GaAs-N-FET	GaAsSB, Ku-Band, 6V, 0.1A, Idss=40...80mA Up=1.5<3.5V, F=4.5dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 650	Mat	GaAs-N-FET	GaAsSB, UHF, 6V, 120mA, Idss=20...120mA Up=0.3...3.5V, F<2dB(4GHz)	25(GSDS)		~SOT-103	-
2 SK 651	Mat	GaAs-N-FET	GaAsSB, UHF, 6V, 150mA, Idss=40...150mA Up=1...3.5V, F<4dB(4GHz)	25(GSDS)		~SOT-103	-
2 SK 652	Mat	N-FET	=2SK301:	40e			-2SK301
2 SK 653	Mat	GaAs-N-FET	GaAsSB, SMD, UHF, 5V, 70mA, Idss=15...70mA Up=0.5...3V, F<3dB(800MHz)	44		SOT-143	-
2 SK 654(Z)	Nec	MOS-N-FET-e	VFET, 100/15V, ±1/3A, 10W, on<3Ω(0.5A), 12/15ns	30p		TO-251 Z: TO-252	2SK468, 2SK611.. 612, 2SK2014
2 SK 655	Mat	MOS-N-FET-e	=2SK620:	40b			-
2 SK 656	Mat	MOS-N-FET-e	=2SK621:	40b			-
2 SK 657	Mat	MOS-N-FET-e	=2SK620:	9c			-
2 SK 658	Mat	MOS-N-FET-e	=2SK621:	9c			-
2 SK 659	Nec	MOS-N-FET-e	VFET, LogL, 60/20V, ±12/60A, 35W, on<75mΩ(6A)	17c		SOT-186	2SK1093, 2SK1256, 2SK1344, 2SK1895, ++
2 SK 660	Nec	N-FET	C-Mic, 20V, 10mA, Idss=0.06...0.5mA, Up<1V, Ur<3μA	40a		(SST)	-
2 SK 662	Mat	N-FET	=2SK198:	35e(2mm)		SOT-323	-
2 SK 663	Mat	N-FET	=2SK374:	35a(2mm)		SOT-323	-
2 SK 664	Mat	MOS-N-FET-e	=2SK620:	35a(2mm)		SOT-323	-
2 SK 665	Mat	MOS-N-FET-e	=2SK621:	35a(2mm)		SOT-323	-
2 SK 666	Hit	GaAs-N-FET	VHF/UHF, 4V, 150mA, Idss=20...80mA F<3.5/Gp=8dB(900MHz)	25(GSDS)		SOT-103	-
2 SK 667	Mat	MOS-N-FET-e	VFET, 400/20V, 8A, 80W, on<1.5Ω	16c(p)		(TOP-3F)	BUZ330...31, BUZ353...54, 2SK1488, 2SK2361
2 SK 668	Hit	GaAs-N-FET	=2SK457:	44(SDSG)		SOT-143	-
2 SK 669	Say	MOS-N-FET-e	VFET, Analog S, 50/12V, 0.1A, 0.2W, 20Ω	40e,d			BSS 100, 2SK1398
2 SK 671	Son	GaAs-N-FET	UHF, X-Band, 5.5V, 120mA, Idss=35...95mA, Up=1...3.5V F<3.5/Gp=9dB(12GHz)	25		~SOT-103	-
2 SK 672	Tos	MOS-N-FET-e	VFET, 60/20V, 10/40A, 40W, on<0.2Ω(5A), 35/55ns	17p		TO-220	BUZ 20, IRF 532...533, 2SK918, 2SK1114, ++
2 SK 673	Tos	MOS-N-FET-e	VFET, 60/20V, 15/60A, 75W, on<0.11Ω(8A), 45/100ns	17p		TO-220	BUZ 21, IRF 530...531, 2SK971, 2SK1416, ++
2 SK 674	Tos	MOS-N-FET-e	VFET, 60/20V, 25/100A, 100W, <60mΩ(15A), 100/165ns	17p		TO-220	BUK 555-60, 2SK1291, 2SK1296, 2SK2411
2 SK 676	Son	GaAs-N-FET	UHF, K-Band, 5V, 70mA, Idss=10...70mA, Up=0.2...3V F<1.4/Gp=11dB(12GHz)	52(SGSD)		SOT-100	-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 677	Son	GaAs-N-FET	UHF, K-Band, 5V, 100mA, Idss=15...100mA, Up=0.2...3V F<1.4/Gp=11dB(12GHz)	51(SGSD)	SOT-100		
2 SK 678	Tos	MOS-N-FET-e	VFET, 500/20V, 13/52A, 150W, <0.4Ω(7A), 100/350ns	77	TOP-3L		2SK1333
2 SK 679	Nec	MOS-N-FET-e	VFET, 30/20V, ±0.5/1.5A, 0.75W, <1Ω(0.5A), 240/950ns	7b	TO-92		BST 70, 2SK422, 2SK940, 2SK1727
2 SK 680(A)	Nec	MOS-N-FET-e*	=2SK681: SMD, ±1/2A	39b	SOT-89		2SK1485, 2SK1726, 2SK2111
2 SK 681(A)	Nec	MOS-N-FET-e*	=2SK679: ±1/2A, 1W	9c	(SP-8)		2SK975, 2SK1272, 2SK1274, 2SK1733
2 SK 682	Hit	MOS-N-FET-e*	FREDFET, 450/20V, 12A, 100W, <0.55Ω(6A), 110/230ns	18p	TO-3P		BUK 638-500
2 SK 683	Hit	MOS-N-FET-e*	=2SK682: 500/20V, on<0.6Ω(6A)	18p	TO-3P		BUK 638-500
2 SK 684	Hit	MOS-N-FET-e*	VFET, 800/20V, 7/20A, 100W, on<1.5Ω(4A), 250/440ns	18p	TO-3P		2SK1032, 2SK1358, 2SK1502, 2SK1614,++
2 SK 685	Hit	MOS-N-FET-e*	FREDFET, 1000/20V, 5/15A, 100W, <2Ω(3A), 265/450ns	18p	TO-3P		BUK 638-1000, BUZ 380...381
2 SK 686	Say	MOS-N-FET-e*	VFET, 60/20V, 5A, 40W, on<0.3Ω(2.5A), 35/55ns	17p	TO-220		IRF511, IRF513, 2SK346, 2SK463, 2SK917++
2 SK 687	Say	MOS-N-FET-e*	VFET, 60/20V, 10A, 60W, on<0.18Ω(5A), 70/95ns	17p	TO-220		IRF 533, 2SK549, 2SK672, 2SK970, 2SK1114
2 SK 688	Say	MOS-N-FET-e*	VFET, 60/20V, 15A, 60W, on<0.12Ω(8A), 90/110ns	17p	TO-220		BUK 552-60, IRF 531, 2SK1416, 2SK2175,++
2 SK 689	Mat	GaAs-N-FET	GaAsSB, UHF, 6V, 70mA, Idss=13...70mA, Up=5...35 F<0.6/Gp>12dB(4GHz)	51(SGSD)	SOT-173		
2 SK 690	Mat	GaAs-N-FET	GaAsSB, UHF, 2x int. Z-Di, 10V, 0.5/1A Idss=150...600mA, Up=0.5...6V, Gp=15dB(1GHz)	39f	SOT-89		
2 SK 691	Mat	GaAs-N-FET	GaAsSB, UHF Out, 20V, 6.3A, Idss=1...3A, Up=0.5...6V Gp>20dB(1GHz)				
2 SK 692	Nec	N-FET	C-Mic Inp., 20V, 10mA, Idss=0.06...0.3mA, Up<0.8V	40a	(SST)		
2 SK 693	Tos	MOS-N-FET-e	VFET, 450/20V, 13/52A, 150W, on<0.4Ω(7A), 100/350ns	77p	TOP-3L		2SK678, 2SK1029, 2SK1333, 2SK1544
2 SK 694	Tos	MOS-N-FET-e	VFET, 500/20V, 12/48A, 150W, on<0.5Ω(7A), 100/350ns	77p	TOP-3L		2SK678, 2SK1029, 2SK1333, 2SK1544
2 SK 695	Hit	MOS-N-FET-e*	VFET, 800/20V, 5/15A, 100W, on<3Ω(3A), 175/240ns	18p	TO-3P	2SK727	18p
2 SK 696	Hit	MOS-N-FET-e*	VFET, 1000/20V, 3/10A, 100W, on<4Ω(2A), 145/250ns	18p	TO-3P	2SK727	18p
2 SK 697	Mat	GaAs-N-FET	GaAsSB, HF, 5V, Idss=15...50mA, Up=0.2...2V F<3.5/Gp=15dB/50MHz	44	SOT-143		
2 SK 698	Nec	MOS-N-FET-e	VFET, 450/20V, ±10A, 120W, on<0.6Ω	16p	(MP-80)		2SK556...557, 2SK1488, 2SK1785, 2SK1561++
2 SK 699	Nec	MOS-N-FET-e	VFET, 100/20V, ±2/6A, 15W, on<1.2Ω(1A), 85/560ns	14j	TO-126		2SK1284...85
2 SK 700	Nec	MOS-N-FET-e	=2SK699: 80V, on<0.8Ω(1A)	14j	TO-126		2SK1284...85
2 SK 701	Nec	MOS-N-FET-e	=2SK699: 60V, on<0.6Ω(1A)	14j	TO-126		2SK1283
2 SK 702	Nec	MOS-N-FET-e	VFET, LogL, 100/20V, ±5/20A, 50W, on<0.45Ω(5A)	17p	TO-220		2SK991
2 SK 703	Nec	MOS-N-FET-e	=2SK702: Iso, 35W	17c	SOT-186		BUK 542-100, 2SK992, 2SK1260, 2SK1265
2 SK 704	Nec	MOS-N-FET-e	VFET, LogL, 60/20V, ±5/20A, 50W, on<0.25Ω(5A)	17p	TO-220		2SK702, 2SK991
2 SK 705	Nec	MOS-N-FET-e	=2SK704: Iso, 35W	17c	SOT-186		BUK 541-60, 2SK992, 2SK1255, 2SK1260
2 SK 707	Nec	MOS-N-FET-e	VFET, 250/20V, ±25/100A, 120W, on<0.15Ω(13A)	16p	(MP-80)		2SK623, 2SK901, 2SK944, 2SK1491, 2SK1641
2 SK 708	Tos	MOS-N-FET-e	VFET, 450/20V, ±10/20A, 200W, <0.6Ω(10A), 600/1000ns	77p	TOP-3L		2SK678, 2SK693, 2SK694, 2SK1029
2 SK 709	Tos	N-FET	HF, AM, 20V, 10mA, Idss=6...32mA, Up<2.5V	7d	TO-92		2SK1000
2 SK 710	Tos	N-FET	=2SK709:	41a			
2 SK 711	Tos	N-FET	=2SK709: SMD	35f	SOT-23		
2 SK 712	Hit	MOS-N-FET-e	VFET, 120V, 10A, 25W, on<0.2Ω	17c	=TO-220Iso		2SK1035, 2SK1230, 2SK2212
2 SK 713	Hit	MOS-N-FET-e	VFET, 450V, 4A, 25W, on<1.4Ω	17c	=TO-220Iso		2SK1231...32, 2SK1351, 2SK1608, 2SK1626++
2 SK 714	Hit	MOS-N-FET-e	=2SK713: 500V	17c	=TO-220Iso		2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 715	Say	N-FET	AM Tuner, 15V, 50mA, Idss=5...24mA, Up<1.4V	40e			
2 SK 719	Nec	MOS-N-FET-e	VFET, 900/20V, ±5/10A, 120W, on<4Ω(3A)	16p	(MP-80)	2SK727	18p
2 SK 720 A	Nec	MOS-N-FET-e	VFET, 250/20V, ±20/80A, 120W, <0.23Ω(10A), 75/160ns	16p	(MP-80)		2SK901, 2SK944, 2SK1641, 2SK1673...74,++
2 SK 722	Son	MOS-N-FET-e	VFET, S P, 170V, 10A, 100W	{2SJ131	18c(p)	TO-3P	2SK633, 2SK1529
2 SK 723	Fjd	MOS-N-FET-e	VFET, 500/20V, 7A, 125W, on<1.2Ω(3.5A), 65/260ns	18p	TO-3P		BUZ 330...331, BUZ 353...354, 2SK1925
2 SK 724	Fjd	MOS-N-FET-e	VFET, 500/20V, 10A, 100W, on<0.67Ω(5A), 130/440ns	18p	TO-3P	IRFPC 50	16p
2 SK 725	Fjd	MOS-N-FET-e	VFET, 500/20V, 15A, 125W, on<0.38Ω(8A), 130/440ns	18p	TO-3P		2SK683, 2SK1488, 2SK1753, 2SK1785,++
2 SK 726	Fjd	MOS-N-FET-e	VFET, 900/20V, 3A, 100W, on<5Ω(1.5A), 60/210ns	18p	TO-3P		BUZ338, 2SK788, 2SK899, 2SK1610, 2SK1757
2 SK 727	Fjd	MOS-N-FET-e	VFET, 900/20V, 5A, 125W, on<2.5Ω(2.5A), 110/420ns	18p	TO-3P	2SK727	18p
2 SK 732	Mit	MOS-N-FET-e	VFET, 450/30V, 10A, 45W, on<0.78Ω(5A), 100/150ns	17c	SOT-186		2SK696, 2SK1339
2 SK 733	Mit	MOS-N-FET-e	=2SK732: 120W	=18p	(TO-3PFM)		2SK685, 2SK1461, 2SK1760, 2SK1794,++
2 SK 734	Mit	MOS-N-FET-e	VFET, 450/30V, 15A, 150W, on<0.52Ω(8A), 160/250ns	=18p	(TO-3PFM)		2SK2363...64
2 SK 735	Nec	MOS-N-FET-e	VFET, 450/20V, ±10/30A, 100W, <0.8Ω(5A), 35/90ns	18p	TO-3P		BUZ 339, 2SK1488, 2SK1753, 2SK1785,++
2 SK 736	Nec	MOS-N-FET-e	VFET, LogL, 100/20V, ±15/60A, 35W, on<0.08Ω(6A)	17c	SOT-186		2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 737	Nec	MOS-N-FET-e	VFET, LogL, 100/20V, ±12/60A, 35W, on<0.15Ω(6A)	17c	SOT-186		BUZ 339, 2SK896, 2SK1488, 2SK1785,++
2 SK 738(Z)	Nec	MOS-N-FET-e	VFET, 30/20V, ±2/8A, 20W, on<0.17Ω(1A), 30/100ns	30p	TO-251		2SK1034, 2SK1306, 2SK1558, 2SK1288
					Z: TO-252		2SK1035, 2SK1305, 2SK1558, 2SK1904
2 SK 739(Z)	Nec	MOS-N-FET-e	=2SK738: 60V, <0.25Ω(1A)	30p	TO-251/252		2SK973...74, 2SK1763, 2SK1950, 2SK1973
2 SK 740	Hit	MOS-N-FET-e*	VFET, 150/20V, 10/40A, 50W, on<0.15Ω(5A), 70/110ns	17p	TO-220		BUZ 31...32, 2SK459, 2SK890, 2SK925,++
2 SK 741	Hit	MOS-N-FET-e*	VFET, 250/20V, 7/28A, 50W, on<0.55Ω(4A), 60/110ns	17p	TO-220		2SK477, 2SK1319...20, 2SK1400, 2SK1667,++
2 SK 742	Mat	MOS-N-FET-e	VFET, 50/20V, 5A, 30W, on<0.22Ω	17c	SOT-186		BUK 441-60, BUK 541-60, 2SK499, 2SK1255+
2 SK 743	Mat	MOS-N-FET-e	VFET, 50/20V, 8A, 40W, on<0.15Ω	17c	SOT-186		BUK 542-50, BUZ 72(A)F, 2SK1261, 2SK1556
2 SK 744	Mat	MOS-N-FET-e	VFET, 50/20V, 10A, 50W, on<0.12Ω	17c	SOT-186		BUZ 71(A)F, BUK 442-50, 2SK1033, 2SK1093
2 SK 745	Mat	MOS-N-FET-e	VFET, 50/20V, 20A, 100W, on<0.055Ω	18p	TO-3P		2SK1256, 2SK1344, 2SK1895, 2SK1974
2 SK 746	Mat	MOS-N-FET-e	VFET, 50/20V, 20A, 100W, on<0.055Ω	16c(p)	(TOP-3F)		2SK622, 2SK629, 2SK1267
2 SK 747	Mat	MOS-N-FET-e	VFET, 100/20V, 5A, 30W, on<0.55Ω	17c	SOT-186		BUK442-100, BUK542-100, 2SK1260, 2SK1265
2 SK 748	Mat	MOS-N-FET-e	VFET, 100/20V, 8A, 40W, on<0.22Ω	17c	SOT-186		BUK443-100, BUK543-100, 2SK1261, 2SK1556
2 SK 749	Mat	MOS-N-FET-e	VFET, 100/20V, 10A, 50W, on<0.18Ω	17c	SOT-186		BUK 545-100, 2SK1305, 2SK1430, 2SK1904++
2 SK 750	Mat	MOS-N-FET-e	VFET, 100/20V, 20A, 100W, on<0.08Ω	18p	TO-3P		2SK622, 2SK629, 2SK1267
2 SK 751	Mat	MOS-N-FET-e	VFET, 100/20V, 20A, 100W, on<0.08Ω	16c(p)	(TOP-3F)		2SK622, 2SK629, 2SK1267
2 SK 752	Mat	MOS-N-FET-e	VFET, 160/20V, 3A, 30W, on<1Ω	17c	SOT-186		BUZ73(A)F, BUK444-200, 2SK1264, 2SK2010
2 SK 753	Mat	MOS-N-FET-e	VFET, 160/20V, 5A, 40W, on<0.5Ω	17c	SOT-186		BUZ73(A)F, BUK444-200, 2SK1265, 2SK2010
2 SK 754	Mat	MOS-N-FET-e	VFET, 160/20V, 10A, 50W, on<0.22Ω	17c	SOT-186		2SK525, 2SK1035, 2SK2212
2 SK 755	Mat	MOS-N-FET-e	VFET, 200/20V, 5/10A, 40W, on<0.5Ω(3A), 30/145ns	17c	SOT-186		BUZ73(A)F, BUK444-200, 2SK2010, 2SK2108+
2 SK 756	Mat	MOS-N-FET-e	VFET, 200/20V, 8A, 40W, on<0.53Ω(3A)	17c	SOT-186		BUK445-200, BUK545-200, 2SK1478, 2SK1957
2 SK 757	Mat	MOS-N-FET-e	VFET, 200/20V, 10/20A, 50W, on<0.33Ω(5A), 60/210ns	17c	SOT-186		2SK526, 2SK1036, 2SK2212, 2SK2426,++
2 SK 758	Mat	MOS-N-FET-e	VFET, 250/20V, 5/10A, 40W, on<0.7Ω(3A), 30/135ns	17c	SOT-186		2SK2010, 2SK2108, 2SK2345
2 SK 759	Mat	MOS-N-FET-e	VFET, 250/20V, 8/16A, 50W, on<0.4Ω(5A), 55/200ns	17c	SOT-186		2SK1478, 2SK1568...69, 2SK1668, 2SK1987++
2 SK 760	Mat	MOS-N-FET-e	VFET, 250/20V, 15/30A, 100W, <0.22Ω(8A), 100/440ns	18p	TO-3P		2SK573, 2SK1135, 2SK1401
2 SK 761	Mat	MOS-N-FET-e	=2SK760: Iso	16c	(TOP-3F)		2SK2012
2 SK 762	Mat	MOS-N-FET-e	VFET, 400/20V, 3/6A, 40W, <3Ω(2A), 30/100ns	17c	SOT-186		BUK 445-450, 2SK1444, 2SK1862, 2SK2431++
2 SK 763	Mat	MOS-N-FET-e	VFET, S P, 400/20V, 5/10A, 50W, <1.4Ω(3A), 40/170ns	17c	SOT-186		2SK1231, 2SK1445, 2SK1992, 2SK2114...15,++
2 SK 764	Mat	MOS-N-FET-e	VFET, 400/20V, 10A, 100W, on<0.75Ω(5A), 70/90ns	18p	TO-3P		BUZ 339, 2SK1488, 2SK1753, 2SK1785,++
2 SK 765	Mat	MOS-N-FET-e	=2SK764: Iso	16c	(TOP-3F)		2SK1206, 2SK1225, 2SK1328, 2SK1831,++
2 SK 762A...765A			=2SK762...765: 450V				
2 SK 766	Mat	MOS-N-FET-e	VFET, 500/20V, 3/6A, 40W, on<3.6Ω(2A), 30/80ns	17c	SOT-186		BUK 445-500, 2SK1572, 2SK1767, 2SK1863
2 SK 767	Mat	MOS-N-FET-e	VFET, 500/20V, 5/10A, 50W, on<1.8Ω(3A), 40/170ns	17c	SOT-186		2SK1232, 2SK1351, 2SK1608, 2SK1627,
2 SK 768	Mat	MOS-N-FET-e	VFET, 500/20V, 10A, 100W, on<1Ω(5A), 70/90ns	18p	TO-3P		2SK1993, 2SK2115, 2SK2254, 2SK2358
2 SK 769	Mat	MOS-N-FET-e	=2SK768: Iso	16c	(TOP-3F)		2SK896, 2SK1488, 2SK1753, 2SK1785,++
							2SK1206, 2SK1523, 2SK1696, 2SK1832

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 770	Mat	MOS-N-FET-e	VFET, 600/20V, 2/4A, 40W, <5Ω(1A), 25/100ns	17c		SOT-186	BUK 445-600, 2SK1758, 2SK1953, 2SK2043++
2 SK 771	Say	N-FET	=2SK772: SMD	35f		SOT-23	-
2 SK 772	Say	N-FET	Analog-S, 40V, 20mA, Idss=1.2...12mA, Up=0.3...2.5V	40e			-
2 SK 773	Nec	MOS-N-FET-e	VFET, 500/20V, ±12/40A, 120W, <0.6Ω(6A), 75/165ns	16p		(MP-80)	BUK 637-500, 2SK896, 2SK1488, 2SK1785,++
2 SK 774	Nec	MOS-N-FET-e	VFET, 500/20V, ±18/60A, 120W, <0.45Ω(9A), 90/205ns	16p		(MP-80)	2SK870, 2SK1170, 2SK1518, 2SK1500,++
2 SK 775	Say	MOS-N-FET-e	VFET, 450/20V, 2A, 50W, on<3.5Ω(1A), 30775ns	17p		TO-220	BUZ 74, IRF 820, IRF 822, 2SK892
2 SK 776	Say	MOS-N-FET-e	VFET, 450/20V, 5A, 60W, <1.6Ω(2A), 40/150ns	17p		TO-220	BUZ 41A...42, 2SK1246, 2SK1440, 2SK2355++
2 SK 777	Say	MOS-N-FET-e	VFET, 450/20V, 10A, 120W, on<0.65Ω(5A), 120/330ns	18p		TO-3P	BUZ 339, 2SK683, 2SK1488, 2SK1785,++
2 SK 778	Say	MOS-N-FET-e	VFET, 250/20V, 0.5A, 10W, on<9Ω(0.25A), 25/60ns	17p		TO-220	IRF 712, 2SK296, 2SK1052
2 SK 779	Hit	GaAs-N-FET	SHF, 5V, 0.12A, 20...120mA, Up=0.5...3.5V F<1.6/Gp>8dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 780	Hit	GaAs-N-FET	=2SK779: F<2.1dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 782	Mat	MOS-N-FET-e	VFET, 200/20V, 5/10A, 40W, on<0.5Ω(3A), 30/145ns	30p		(TO-220MF)	(IRF 624, 2SK924, 2SK1391)¶
2 SK 783	Fjd	MOS-N-FET-e	VFET, 500/20V, 12A, 125W, <0.57Ω				-
2 SK 784	Nec	MOS-N-FET-e	VFET, 450/20V, ±20/80A, 150W, <0.35Ω(10A), 130/265ns	18p		TO-3P	2SK1497...1500, 2SK1517...18, 2SK1680,++
2 SK 785	Nec	MOS-N-FET-e	=2SK784: 500V, <0.4Ω(10A)	18p		TO-3P	2SK870, 2SK1500, 2SK1518, 2SK1680,++
2 SK 786	Nec	MOS-N-FET-e	VFET, 900/20V, ±3/6A, 60W, on<7.5Ω(1.5A), 20/50ns	17p		TO-220	BUK 456-1000, 2SK792, 2SK1638, 2SK1793
2 SK 787	Nec	MOS-N-FET-e	VFET, 900/20V, ±8/16A, 150W, on<1.6Ω(4A), 95/240ns	18p		TO-3P	2SK1358, 2SK1502, 2SK1614, 2SK1692
2 SK 788	Tos	MOS-N-FET-e	VFET, 500/20V, 13/52A, 150W, <0.5Ω(7A), 100/350ns	18p		TO-3P	2SK725, 2SK1610, 2SK1745, 2SK1757,++
2 SK 789	Tos	MOS-N-FET-e	VFET, 450/20V, 15/60A, 150W, <0.4Ω(7A), 100/350ns	18p		TO-3P	2SK725, 2SK1610, 2SK1745, 2SK1757,++
2 SK 790	Tos	MOS-N-FET-e	VFET, 500/20V, 15/60A, 150W, <0.4Ω(7A), 100/350ns	18p		TO-3P	2SK725, 2SK1610, 2SK1745, 2SK1757,++
2 SK 791	Tos	MOS-N-FET-e	VFET, 850/20V, 3/5A, 100W, on<4.5Ω(1.5A), 70/280ns	17p		TO-220	BUK456-1000, 2SK1456, 2SK1601, 2SK1638++
2 SK 792	Tos	MOS-N-FET-e	=2SK791: 900/20V	17p		TO-220	BUK456-1000, 2SK1456, 2SK1601, 2SK1638++
2 SK 793	Tos	MOS-N-FET-e	VFET, 850/20V, 5/10A, 150W, on<2.5Ω(3A), 130/480ns	18p		TO-3P	2SK727, 2SK1341, 2SK1649...50, 2SK1794,++
2 SK 794	Tos	MOS-N-FET-e	=2SK793: 900/20V	18p		TO-3P	2SK727, 2SK1341, 2SK1649...50, 2SK1794,++
2 SK 795	Mat	MOS-N-FET-e	=2SK770: 15W	-30c		(I Type)	-
2 SK 796	Mat	MOS-N-FET-e	VFET, 800/20V, 3A, 90W, on<5Ω(2A), 55/-ns	16c(p)		(TOP-3F)	BUZ 307, 2SK603, 2SK954, 2SK1339, ++
2 SK 796 A		MOS-N-FET-e	=2SK796: 900/20V	16c(p)		(TOP-3F)	2SK696, 2SK726, 2SK1339
2 SK 797	Nec	MOS-N-FET-e	VFET, LogL, 60/20V, ±40/160A, 150W, <18mΩ(20A)	18p		TO-3P	2SK1297, 2SK1514, 2SK1665, 2SK2096
2 SK 798	Nec	MOS-N-FET-e	=2SK797: 100V, <31mΩ(20A)	18p		TO-3P	2SK1122, 2SK1263, 2SK1304
2 SK 799	Nec	MOS-N-FET-e	=2SK773: 450V <0.5Ω(6A)	16p		(MP-80)	BUK 637-500, 2SK644, 2SK896, 2SK1488,++
2 SK 800	Nec	MOS-N-FET-e	=2SK774: 450V, <0.38Ω(9A)	16p		(MP-80)	2SK870, 2SK1497...1500, 2SK1518, 2SK1544++
2 SK 801	Nec	MOS-N-FET-e	VFET, 30/20V, ±2/8A, 12W, on<0.35Ω(1A), 120/650ns	30p		TO-251/252	2SK973...974, 2SK1282, 2SK1763
2 SK 802	Nec	MOS-N-FET-e	=2SK801: 15W	14j		TO-126	2SK1283
2 SK 803	Mat	MOS-N-FET-e	VFET, 160/20V, 8A, 40W, on<0.38Ω	17c		SOT-186	BUK445-200, BUK454-200, 2SK1957, 2SK2161
2 SK 804	Mat	MOS-N-FET-e	VFET, 150/20V, 20/40A, 100W, <0.12Ω(10A), 120/470ns	16c		(TOP-3F)	2SK822, 2SK1549, 2SK2008
2 SK 805	Mat	MOS-N-FET-e	VFET, 200/20V, 20/40A, 100W, <0.19Ω(10A), 100/420ns	16c		(TOP-3F)	2SK822, 2SK1549, 2SK2008
2 SK 806	Mat	MOS-N-FET-e	VFET, 600/20V, 3/6A, 50W, on<2.7Ω(2A), 35/160ns	17c		SOT-186	2SK1572, 2SK1767, 2SK2144
2 SK 807	Mat	MOS-N-FET-e	VFET, 600/20V, 5/10V, 100W, on<1.7Ω(3A), 60/300ns	16c		(TOP-3F)	BUK 427-600, 2SK1176, 2SK1463, 2SK1859
2 SK 808	Mat	MOS-N-FET-e	VFET, 800/20V, 1/3A, 45W, <7Ω(0.7A), 35/110ns	17c		SOT-186	BUK 444-800, 2SK1142, 2SK1611, 2SK1834++
2 SK 808 A		MOS-N-FET-e	=2SK808: 900/20V	17c		SOT-186	BUK 446-1000, 2SK1174, 2SK1459, 2SK1994
2 SK 809	Mat	MOS-N-FET-e	VFET, 800/20V, 5A, 100W, on<3Ω(3A), 60/-ns	16c		(TOP-3F)	2SK1176, 2SK1463, 2SK1684, 2SK1859
2 SK 809 A		MOS-N-FET-e	=2SK809: 900/20V	16c		(TOP-3F)	2SK1176, 2SK1463, 2SK1684, 2SK1859
2 SK 810	Nec	MOS-N-FET-e	VFET, LogL, 100/20V, ±14/56A, 60W, on<0.18Ω(8A)	17p		TO-220	2SK1301, 2SK1559, 2SK1561
2 SK 811	Nec	MOS-N-FET-e	=2SK810: Iso, ±12A, 35W	17c		SOT-186	BUK 545-100, 2SK1035, 2SK1305, 2SK1904
2 SK 812	Nec	MOS-N-FET-e	VFET, LogL, 60/20V, ±27/108A, 60W, on<85mΩ(15A)	17p		TO-220	2SK1291, 2SK1296, 2SK2411
2 SK 813	Nec	MOS-N-FET-e	=2SK810: Iso, ±21A, 35W	17c		SOT-186	2SK943, 2SK1214, 2SK1345...46, 2SK1897
2 SK 814	Nec	MOS-N-FET-e	VFET, LogL, 30/20V, ±15/60A, 35W, on<45mΩ(8A)	17c		SOT-186	2SK1034, 2SK1306, 2SK1558
2 SK 815	Nec	MOS-N-FET-e	VFET, LogL, 100/20V, ±21/84A, 35W, on<85mΩ(15A)	17c		SOT-186	2SK1266, 2SK1307, 2SK1348...49, 2SK1906
2 SK 817	Nec	MOS-N-FET-e	VFET, LogL, 50V, ±26/104A, 35W, on<55mΩ(15A)	17c		SOT-186	2SK1262
2 SK 818	Mat	MOS-N-FET-e	VFET, 800/20V, 5A, 100W, on<3Ω(3A), 60/-ns	18p		TO-3P	2SK727, 2SK1649...50, 2SK1760, 2SK1794,++
2 SK 818 A		MOS-N-FET-e	=2SK818: 900/20V	18p		TO-3P	2SK727, 2SK1649...50, 2SK1760, 2SK1794,++
2 SK 819	Nec	MOS-N-FET-e	VFET, 500/20V, ±10/30A, 100W, on<1Ω(5A), 35/90ns	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1785, ++
2 SK 820	Nec	MOS-N-FET-e	VFET, 250/20V, ±18/72A, 80W, <0.23Ω(10A), 75/160ns	18c		TO-3P Iso	2SK944, 2SK1641, 2SK1673, 2SK2058,++
2 SK 821	Nec	MOS-N-FET-e	VFET, 250/20V, ±20/80A, 150W, <0.23Ω(10A), 75/160ns	18p		TO-3P	2SK944, 2SK1641, 2SK1673, 2SK2058,++
2 SK 822	Nec	MOS-N-FET-e	VFET, 250/20V, ±22/88A, 90W, <0.15Ω(13A), 110/200ns	18c		TO-3P Iso	2SK1670, 2SK2008
2 SK 823	Nec	MOS-N-FET-e	VFET, 250/20V, ±25/100A, 150W, <0.15Ω(13A)	18p		TO-3P	2SK1492, 2SK1669, 2SK1671, 2SK1675
2 SK 824	Nec	MOS-N-FET-e	VFET, 450/20V, ±12/40A, 90W, <0.5Ω(7.5A), 60/140ns	18c		TO-3P Iso	2SK1268...69, 2SK1452...53, 2SK1524, 2SK1831
2 SK 825	Nec	MOS-N-FET-e	VFET, 450/20V, ±15/140A, 150W, <0.5Ω(7.5A), 55/135ns	18p		TO-3P	BUZ 338, 2SK899, 2SK1573, 2SK1610, ++
2 SK 826	Nec	MOS-N-FET-e	VFET, 450/20V, ±15/60A, 95W, <0.38Ω(9A), 60/175ns	18c		TO-3P Iso	2SK1268...69, 2SK1331, 2SK1453, 2SK1524
2 SK 827	Nec	MOS-N-FET-e	VFET, 450/20V, ±18/60A, 150W, <0.38Ω(9A), 60/175ns	18p		TO-3P	BUZ 338, 2SK899, 2SK1610, 2SK1680,++
2 SK 828	Nec	MOS-N-FET-e	VFET, 500/20V, ±12/40A, 90W, <0.6Ω(7.5A), 75/165ns	18c		TO-3P Iso	2SK1269, 2SK1331, 2SK1524, 2SK1696, ++
2 SK 829	Nec	MOS-N-FET-e	VFET, 500/20V, ±15/40A, 150W, <0.6Ω(7.5A), 75/165ns	18p		TO-3P	BUZ 338, 2SK899, 2SK1610, 2SK1757,++
2 SK 830	Nec	MOS-N-FET-e	VFET, 500/20V, ±15/60A, 95W, <0.45Ω(9A), 90/205ns	18c		TO-3P Iso	2SK1269, 2SK1331, 2SK1405, 2SK1524
2 SK 831	Nec	MOS-N-FET-e	VFET, 500/20V, ±18/60A, 150W, <0.45Ω(9A), 90/205ns	18p		TO-3P	BUZ 338, 2SK899, 2SK1500, 2SK1610,++
2 SK 832	Nec	MOS-N-FET-e	VFET, 900/20V, ±4/10A, 85W, on<4Ω(3A), 55/100ns	18c		TO-3P Iso	2SK809A, 2SK1463, 2SK1684, 2SK1859
2 SK 833	Nec	MOS-N-FET-e	VFET, 900/20V, ±5/10A, 150W, on<4Ω(3A), 55/100ns	18p		TO-3P	2SK794, 2SK1341, 2SK1461, 2SK1794,++
2 SK 834	Nec	MOS-N-FET-e	VFET, 900/20V, ±8A, 100W, on<1.6Ω(4A)	18c		TO-3P Iso	2SK1465, 2SK1685, 2SK1775
2 SK 839	Mat	MOS-N-FET	40/2V, 2A				-
2 SK 840	Mat	MOS-N-FET	40/20V, 2A				-
2 SK 841	Mat	MOS-N-FET	250/20V, 1A				-
2 SK 842	Mat	MOS-N-FET	400/20V, 0.5A				-
2 SK 843	Mit	MOS-N-FET-e	VFET, 60/30V, 10A, 40W, <0.1Ω(5A)	17c		SOT-186	BUK 442-60, 2SK1093, 2SK1895, 2SK1974,++
2 SK 844	Mit	MOS-N-FET-e	VFET, 100/30V, 8A, 40W, on<0.15Ω(4A)	17c		SOT-186	BUK443-100, BUZ72(A)F, 2SK1261, 2SK1556+
2 SK 845	Mit	MOS-N-FET-e	VFET, 450/30V, 5A, 40W, on<1.3Ω(3A), 70/100ns	17c		SOT-186	2SK1231...32, 2SK1351, 2SK1608, 2SK1626, 2SK1626...27, 2SK2114...15, 2SK2253...54,++
2 SK 846	Mit	MOS-N-FET-e	VFET, 900/30V, 3A, 45W, on<4Ω(1.5A), 70/140ns	17c		SOT-186	2SK1356, 2SK1460, 2SK1995
2 SK 847	Mit	MOS-N-FET-e	=2SK846: 120W	-18c		(TO-3PFM)	2SK726, 2SK1339
2 SK 848	Say	MOS-N-FET-e	VFET, SMD, 250/20V, 0.5/1A, <9Ω(0.25A), 25/60ns	39b		SOT-89	-
2 SK 849	Tos	MOS-N-FET-e	VFET, 60/20V, 40/160A, 150W, on<38mΩ(20A), 60/80ns	18p		TO-3P	2SK1124, 2SK1514, 2SK1665, 2SK2096
2 SK 850	Tos	MOS-N-FET-e	VFET, 100/20V, 35/140A, 150W, on<60mΩ(20A), 50/80ns	18p		TO-3P	2SK1122, 2SK1263, 2SK1304, 2SK1433
2 SK 851	Tos	MOS-N-FET-e	VFET, 200/20V, 30/120A, 150W, <85mΩ(16A), 55/90ns	18p		TO-3P	BUZ 341, 2SK1492, 2SK1669, 2SK1671,++
2 SK 852	Nec	N-FET	=2SK94:	35f(2mm)		SOT-323	-
2 SK 853(A)	Nec	N-FET	=2SK160:	35f(2mm)		SOT-323	-
2 SK 854	Nec	MOS-N-FET-e	VFET, 450/20V, ±5/20A, 50W, <1.4Ω(2.5A), 21/37ns	17p		TO-220	BUZ 41A...42, BUZ 90, 2SK893, 2SK1246,++
2 SK 855	Nec	MOS-N-FET-e	=2SK854: 500/20V, <1.5Ω(2.5A)	17p		TO-220	BUZ 41A...42, BUZ 90, 2SK893, 2SK1246
2 SK 856	Tos	MOS-N-FET-e	VFET, 60/20V, 45/180A, 125W, 0.03Ω(25A), 60/190ns	17p		TO-220	PRFZ 42, 2SK1418, 2SK1542, 2SK1911
2 SK 857	Tos	MOS-N-FET-e	=2SK856:	18p		TO-3P	2SK1124, 2SK1297, 2SK1665, 2SK2096,++
2 SK 858	Tos	MOS-N-FET-e	VFET, 600/20V, 2/8A, 40W, on<4Ω(1A), 35/110ns	17p		TO-220	BUZ 80, 2SK1323...24, 2SK1922
2 SK 859	Fjd	MOS-N-FET-e	VFET, 500/20V, 9A, 125W, on<0.8Ω(5A)	18c(p)		TO-3P	BUZ 330, BUZ 353, 2SK557, 2SK724, ++
2 SK 863	Mat	MOS-N-FET-e	=2SK1257				-2SK1257
2 SK 864	Mat	MOS-N-FET-e	=2SK1258				-2SK1258
2 SK 865	Mat	MOS-N-FET-e	=2SK1262				-2SK1262

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 866	Mat	MOS-N-FET-e	-2SK1263				-2SK1263
2 SK 867	Mat	MOS-N-FET-e	VFET, 400/20V, 15A, 120W, on<0.45Ω(8A), 120/-ns	18p		TO-3P	BUK 637-400, 2SK1610, 2SK1745, 2SK1757++
2 SK 867 A		MOS-N-FET-e	=2SK867: 450/20V	18p		TO-3P	BUK 638-500, 2SK1610, 2SK1745, 2SK1757++
2 SK 868	Mat	MOS-N-FET-e	VFET, 400/20V, 20/40A, 130W, <0.35Ω(10A), 150/670ns	18p		TO-3P	2SK1169...70, 2SK1517...18, 2SK1497...98,++
2 SK 868 A		MOS-N-FET-e	=2SK868: 450/20V	18p		TO-3P	2SK1169...70, 2SK1517...18, 2SK1497...98,++
2 SK 869	Mat	MOS-N-FET-e	VFET, 500/20V, 15A, 120W, on<0.5Ω(8A), 110/-ns	18p		TO-3P	BUZ 338, 2SK1610, 2SK1745, 2SK1757,++
2 SK 870	Mat	MOS-N-FET-e	VFET, 500/20V, 20/40A, 130W, <0.4Ω(10A), 150/620ns	18p		TO-3P	2SK1170, 2SK1498, 2SK1500, 2SK1518,++
2 SK 871	Nec	MOS-N-FET-e	VFET, 900/20V, ±4/8A, 120W, on<5.5Ω(2A), 30/80ns	18p	2SK727	18p	2SK727, 2SK1461, 2SK1649...50, 2SK1760,++
2 SK 872	Nec	MOS-N-FET-e	VFET, 900/20V, ±6A, 150W, on<2.5Ω(3A), 50/200ns	18p		TO-3P	2SK1358, 2SK1614, 2SK1692, 2SK1795...96++
2 SK 873	Nec	MOS-N-FET-e	VFET, 450/20V, ±8/32A, 100W, on<1.1Ω(4A), 70/150ns	18p		TO-3P	BUZ 330...331, BUZ 385, 2SK1753, 2SK1785++
2 SK 874	Nec	MOS-N-FET-e	=2SK873: 500/20V, on<1.2Ω(4A)	18p		TO-3P	BUZ 330...331, BUZ 385, 2SK1753, 2SK1785++
2 SK 875	Nec	MOS-N-FET-e	VFET, 450/20V, ±12/48A, 120W, <0.6Ω(6A), 80/150ns	18p		TO-3P	BUZ 339, BUK 637-500, 2SK1610, 2SK1785++
2 SK 876	Nec	MOS-N-FET-e	=2SK875: 500/20V, on<0.7Ω(6A)	18p		TO-3P	BUZ 339, BUK 637-500, 2SK1610, 2SK1785++
2 SK 879	Tos	N-FET	SMD, C-Mic, 50V, Idss=0.3...6.5mA, Up=0.4...5V	35f(2mm)		SOT-323	-
2 SK 880	Tos	N-FET	SMD, C-Mic, 50V, Idss=0.6...14mA, Up=0.2...1.5V	35f(2mm)		SOT-323	-
2 SK 881	Tos	N-FET	SMD, FM/VHF, 18V, Idss=1...10mA, Up=0.4...4V F<3.5/Gp=18dB(100MHz)	35c(2mm)		SOT-323	-
2 SK 882	Tos	MOS-N-FET-d	SMD, FM/VHF, 20V, 30mA, Idss=3...14mA, Up<2.5V F<3/Gp=28dB(100MHz)	35c(2mm)		SOT-323	-
2 SK 888	Tos	MOS-N-FET-e	VFET, 100/20V, 15/60A, 75W, on<0.18Ω(8A), 50/40ns	17p		TO-220	IRF640...643, 2SK919, 2SK1301, 2SK1559,++
2 SK 889	Tos	MOS-N-FET-e	VFET, 100/20V, 27/108A, 125W, on<85mΩ(15A), 45/55ns	17p		TO-220	BUK 456-100, 2SK1429, 2SK2050
2 SK 890	Tos	MOS-N-FET-e	VFET, 200/20V, 10/40A, 75W, on<0.4Ω(5A), 32/50ns	17p		TO-220	BUZ 31...32, 2SK925, 2SK1221, 2SK1393
2 SK 891	Tos	MOS-N-FET-e	VFET, 200/20V, 18/72A, 125W, on<0.18Ω(10A), 30/55ns	17p		TO-220	BUK 456-200, BUZ 30A, IRF 640
2 SK 892	Tos	MOS-N-FET-e	VFET, 500/20V, 2.5/10A, 40W, on<3Ω(1A), 23/80ns	17p		TO-220	BUZ 74, IRF 820, IRF 822, 2SK858,++
2 SK 893	Tos	MOS-N-FET-e	VFET, 500/20V, 5/20A, 75W, on<1.5Ω(2.5A), 30/40ns	17p		TO-220	BUZ 41A...42, IRF 830, IRF 832, 2SK1246++
2 SK 894	Tos	MOS-N-FET-e	VFET, 500/20V, 8/32A, 125W, on<0.85Ω(4A), 25/60ns	17p		TO-220	BUK 657-500, 2SK1496, 2SK1574, 2SK2408++
2 SK 895	Tos	MOS-N-FET-e	VFET, 450/20V, 12/48A, 125W, on<0.6Ω(6A), 90/380ns	18p		TO-3P	BUZ 339, 2SK1515...16, 2SK1610, 2SK1745++
2 SK 896	Tos	MOS-N-FET-e	=2SK895: 500/20V	18p		TO-3P	BUZ 339, 2SK1515, 2SK1610, 2SK1745,++
2 SK 897	Fjd	MOS-N-FET-e	VFET, 550/20V, 4A, 40W, on<1.5Ω(2A), 65/240ns	-15c			2SK1404, 2SK1637, 2SK2044, 2SK2118,++
2 SK 899	Fjd	MOS-N-FET-e	VFET, 500/20V, 18A, 125W, on<0.33Ω(8A), 130/140ns	18p		TO-3P	2SK725, 2SK1170, 2SK1518, 2SK1680,++
2 SK 900	Fjd	MOS-N-FET-e	VFET, 250/20V, 12A, 80W, on<0.3Ω(6A), 75/360ns	18p		TO-220	2SK925, 2SK1221, 2SK1393, 2SK1761,++
2 SK 901	Fjd	MOS-N-FET-e	VFET, 250/20V, 20A, 125W, on<0.15Ω(10A), 100/520ns	17p		TO-3P	2SK1641, 2SK1673, 2SK2058, 2SK2075,++
2 SK 902	Fjd	MOS-N-FET-e	VFET, 250/20V, 30A, 150W, on<0.1Ω(15A), 60/210ns	18p		TO-3P	2SK1492, 2SK1669, 2SK1671, 2SK1675...76
2 SK 903	Fjd	MOS-N-FET-e	VFET, 800/20V, 3A, 40W, on<4Ω(1.5A), 60/210ns	-15c			2SK1356, 2SK1460, 2SK1995
2 SK 904	Fjd	MOS-N-FET-e	=2SK903: 80W	17p		TO-220	BUK 456-800, 2SK1600...01, 2SK1638,++
2 SK 905	Fjd	MOS-N-FET-e	VFET, 50/20V, 45A, 125W, on<0.03Ω(22A), 160/550ns	18p		TO-3P	BUZ347...348, 2SK1124, 2SK1514, 2SK2096++
2 SK 906	Fjd	MOS-N-FET-e	VFET, 100/20V, 32A, 125W, on<0.06Ω(16A), 120/470ns	18p		TO-3P	BUZ 341, 2SK850, 2SK1303, 2SK1429
2 SK 917	Say	MOS-N-FET-e	VFET, 100/20V, 5A, 40W, on<0.5Ω	17p		TO-220	IRF 510, IRF 512, 2SK628, 2SK702
2 SK 918	Say	MOS-N-FET-e	VFET, 100/20V, 10A, 50W, on<0.3Ω	17p		TO-220	BUZ20, BUZ 72, IRF532, 2SK740, 2SK1427++
2 SK 919	Say	MOS-N-FET-e	VFET, 100/20V, 15A, 60W, on<0.15Ω	17p		TO-220	BUZ21, IRF 530, 2SK888, 2SK1301, 2SK1559
2 SK 920	Say	MOS-N-FET-e	VFET, 120/20V, 5A, 40W, on<0.6Ω	17p		TO-220	IRF 620, 2SK357
2 SK 921	Say	MOS-N-FET-e	VFET, 120/20V, 10A, 50W, on<0.35Ω	17p		TO-220	BUZ 31, 2SK740
2 SK 922	Say	MOS-N-FET-e	VFET, 120/20V, 15A, 60W, on<0.2Ω	17p		TO-220	IRF 641, IRF 643, 2SK1561
2 SK 923	Say	MOS-N-FET-e	VFET, 250/20V, 3A, 40W, on<1.4Ω	17p		TO-220	BUZ 76, IRF 720, IRF 722
2 SK 924	Say	MOS-N-FET-e	VFET, 250/20V, 5A, 50W, on<0.8Ω	17p		TO-220	BUZ 60, IRF 624, 2SK1391, 2SK1921
2 SK 925	Say	MOS-N-FET-e	VFET, 250/20V, 10A, 60W, on<0.45Ω	17p		TO-220	2SK926, 2SK1221, 2SK1393, 2SK1761
2 SK 926	Nec	MOS-N-FET-e	VFET, 250/20V, ±10/40A, 60W, on<0.5Ω(5A), 50/80ns	17p		TO-220	2SK925, 2SK1221, 2SK1393, 2SK1761
2 SK 928	Nec	MOS-N-FET-e	VFET, 450/20V, ±5/20A, 35W, on<1.4Ω(2.5A), 21/37ns	17c		=SOT-186	2SK1231...32, 2SK1351, 2SK1608, 2SK1626++
2 SK 929	Nec	MOS-N-FET-e	=2SK928: 500/20V, on<1.5Ω(2.5A)	17c		=SOT-186	2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 930	Mit	N-FET	=2SK433:	35f(2mm)		SOT-323	-
2 SK 931	Say	N-FET	SMD, Uni, 30V, 50mA, Idss=5...30mA, Up=0.3...2V	35f		SOT-23	-
2 SK 932	Say	N-FET	SMD, AM Tuner, 15V, 50mA, Idss=5...24mA, Up=0.2...1.4V	35f		SOT-23	2SK931
2 SK 933	Say	MOS-N-FET-e	VFET, 60/20V, ±15A, 35W, on<0.12Ω(8A), 90/100ns	17c		TO-220 Iso	2SK1094, 2SK1286, 2SK1419, 2SK1896
2 SK 934	Mit	MOS-N-FET-e	VFET, 250/30V, 8A, 40W, on<0.52Ω(4A), 70/100ns	17c		SOT-186	2SK1478, 2SK1568...69, 2SK1668, 2SK1987++
2 SK 935	Mit	MOS-N-FET-e	=2SK934: 300/30V, <0.6Ω(4A)	17c		SOT-186	2SK1566, 2SK1569
2 SK 936	Say	MOS-N-FET-e	VFET, 50/30V, 30A, 45W, <0.03Ω(15A)				-
2 SK 937	Say	N-FET	Uni, 40V, 0.1A, 0.3W, Idss=40...75mA, Up=2...5V	7e		TO-92	-
2 SK 940	Tos	MOS-N-FET-e*	VFET, LogL, 60/20V, 0.8A, 0.9W, <0.55Ω(0.4A), 9/55ns	7c(9mm)		TO-92L	2SK975, 2SK1274, 2SK1733
2 SK 941	Tos	MOS-N-FET-e*	VFET, LogL, 100/20V, 0.6A, 0.9W, <1.3Ω(0.3A), 9/75ns	7c(9mm)		TO-92L	2SK1729, 2SK1736, 2SK2085
2 SK 942	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 25A, 75W, <46mΩ(12A), 25/145ns	17p		TO-220	BUK 555-60, 2SK1115, 2SK1296, 2SK1910,++
2 SK 943	Tos	MOS-N-FET-e	=2SK942: Iso, 40W	17c		TO-220 Iso	2SK1345, 2SK1214, 2SK1290, 2SK1897,++
2 SK 944	Tos	MOS-N-FET-e	VFET, 250/20V, 22/88A, 150W, <0.15Ω(11A), 70/165ns	18p		TO-3P	2SK901, 2SK1641, 2SK1673, 2SK2075,++
2 SK 945	Tos	MOS-N-FET-e	VFET, 400/20V, 1/4A, 10W, <5Ω(0.5A), 40/135ns	30p		TO-251/252	2SK579...580, 2SK1151, 2SK1672, 2SK2017++
2 SK 946	Nec	MOS-N-FET-e	VFET, 900/20V, ±3/8A, 40W, on<5.5Ω(2A), 35/80ns	17c		=SOT-186	2SK1356, 2SK1460, 2SK1995
2 SK 947	Fjd	MOS-N-FET-e	VFET, 250/20V, 12A, 40W, on<0.3Ω(6A), 75/260ns	-15c			2SK1036, 2SK1762, 2SK2011, 2SK2426,++
2 SK 948	Fjd	MOS-N-FET-e	=2SK947: 10W	30p		=TO-252	-
2 SK 949	Fjd	MOS-N-FET-e	VFET, 500V, 6A, 40W, on<1.2Ω(3.5A), 65/260ns	-15c			2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 950	Fjd	MOS-N-FET-e	=2SK949: 80W	17p		TO-220	2SK893, 2SK1156, 2SK1246, 2SK1751,++
2 SK 951	Fjd	MOS-N-FET-e	VFET, 800/30V, 2.5A, 40W, on<7Ω(1A), 80/165ns	-15c			BUK 446-800, 2SK1142, 2SK1611, 2SK1834++
2 SK 952	Fjd	MOS-N-FET-e	VFET, 800/30V, 2.5A, 40W, on<7Ω(1A), 60/110ns	17p		TO-220	BUZ 80, 2SK1323...24, 2SK1456, 2SK1601,++
2 SK 953	Fjd	MOS-N-FET-e	=2SK952: 80W	18p		TO-3P	BUZ 307...308, 2SK954, 2SK1339
2 SK 954	Fjd	MOS-N-FET-e	VFET, 800/20V, 3A, 100W, on<4Ω(1.5A), 60/210ns	18p		TO-3P	BUZ 307, 2SK558, 2SK603, 2SK1339
2 SK 955	Fjd	MOS-N-FET-e	VFET, 800/20V, 5A, 125W, on<2Ω(2.5A), 110/420ns	18p	2SK727	18p	2SK727, 2SK793, 2SK1649...50, 2SK1794,++
2 SK 956	Fjd	MOS-N-FET-e	VFET, 800V, 9A, 150W, on<1.5Ω(4A), 280/460ns	18p		TO-3P	2SK1032, 2SK1796, 2SK1933
2 SK 957	Fjd	MOS-N-FET-e	VFET, 900/30V, 2A, 40W, on<8.5Ω(1A), 60/110ns	-15c			2SK1143, 2SK1275, 2SK1459, 2SK1994,++
2 SK 958	Fjd	MOS-N-FET-e	=2SK957: 45W	17p		TO-220	2SK1199, 2SK1338, 2SK1324
2 SK 959	Fjd	MOS-N-FET-e	=2SK957: 80W	18p		TO-3P	2SK726, 2SK1339
2 SK 960	Fjd	MOS-N-FET-e	VFET, 900/20V, 3A, 40W, on<5Ω(1.5A), 60/210ns	-15c			2SK1356, 2SK1460, 2SK1995
2 SK 961	Fjd	MOS-N-FET-e	=2SK960: 80W	17p		TO-220	2SK1601, 2SK1456, 2SK1638, 2SK1793,++
2 SK 962	Fjd	MOS-N-FET-e	VFET, 900/30V, 8A, 150W, on<2Ω(4A), 280/460ns	18p		TO-3P	2SK1358, 2SK1614, 2SK1502, 2SK1795,++
2 SK 963	Mat	MOS-N-FET-e	=2SK758: 15W	-30c		(I Type)	-
2 SK 968	Say	N-FET	SMD, FM, 20V, 20mA, Idss=0.6...12mA, Up=0.2...2.5V Gp=24dB(100MHz)	35c		SOT-23	2SK608
2 SK 969	Say	GaAs-N-FET	SMD, HF, 16V, 20mA, Idss=1.2...12mA	35c		SOT-23	-
2 SK 970	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 10A, 30W, <0.15Ω(5A), 60/230ns	17p		TO-220	2SK1114, 2SK1300
2 SK 971	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 15A, 40W, <65mΩ(8A), 80/300ns	17p		TO-220	BUK552-60, 2SK1115...16, 2SK1301, 2SK2175
2 SK 972	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 25A, 50W, <40mΩ(15A), 145/450ns	17p		TO-220	BUK 555-60, 2SK1115, 2SK1296, 2SK2411,++
2 SK 973(L.S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 2/8A, 10W, <0.35Ω(1A), 19/120ns	30p		TO-251, 252	2SK1763
2 SK 974(L.S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 3A, 20W, <0.18Ω(2A), 30/225ns	30p		TO-251, 252	2SK1113, 2SK1254, 2SK1282, 2SK1950,++
2 SK 975	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 1.5A, 0.9W, <0.4Ω(1A), 15/80ns	7c(9mm)		TO-92L	2SK1274, 2SK1733, 2SK2070, 2SK2085,++
2 SK 976	Hit	MOS-N-FET-e*	=2SK970: Iso, 20W	17c		TO-220 Iso	2SK1093, 2SK1895, 2SK1878, 2SK1904
2 SK 977	Hit	MOS-N-FET-e*	=2SK971: Iso, 25W	17c		TO-220 Iso	2SK1094, 2SK1286, 2SK1306, 2SK1896
2 SK 978	Hit	MOS-N-FET-e*	=2SK972: Iso, 30W	17c		TO-220 Iso	2SK1290, 2SK1897, 2SK1951, 2SK2346

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 979	Sak	MOS-N-FET-e	VFET, 450/20V, 10A, 120W, on=0.5 $\Omega$ (5A), <160/250ns	18p			2SK896, 2SK1488, 2SK1752...53, 2SK1785,++
2 SK 980	Hit	N-FET	SMD, Video-Frequ., 12V, 40mA, Idss=8...32mA Up=0.1...2.5V	35f			-
2 SK 981(A)	Mat	MOS-N-FET-e	=2SK762(A): 15W	=30c		(I Type)	-
2 SK 982	Tos	MOS-N-FET-e	Interface, S, 60/20V, 0.2/0.8A, 0.4W, on<1 $\Omega$ (50mA) 14/75ns	7c		TO-92	BS 170, BST 170, 2SK422...423, 2SK1336,++
2 SK 987	Mit	MOS-N-FET-e	VFET, 500/30V, 5A, 40W, on<1.6 $\Omega$ (3A)	17c			2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 988	Mit	MOS-N-FET-e	VFET, 500/30V, 10A, 45W, on<0.9 $\Omega$ (5A)	17c			2SK2364
2 SK 989	Mit	MOS-N-FET-e	VFET, 500/30V, 10A, 120W, on<0.9 $\Omega$ (5A), 100/150ns	=18p		(TO-3PFM)	2SK1488, 2SK1753, 2SK1785, 2SK2362,++
2 SK 990	Mit	MOS-N-FET-e	VFET, 500/30V, 15A, 150W, on<0.65 $\Omega$ (8A), 160/250ns	=18p		(TO-3PFM)	2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 991	Nec	MOS-N-FET-e*	VFET, LogL, 100/15V, $\pm$ 4/8A, 35W, <0.5 $\Omega$ (2A), 46/220ns	17p			2SK702, 2SK1474
2 SK 992	Nec	MOS-N-FET-e*	=2SK991: Iso, 30W	17c			BUK 542-100, 2SK703, 2SK1260, 2SK1265
2 SK 993	Nec	MOS-N-FET-e*	VFET, LogL, 60/15V, $\pm$ 8/16A, 35W, <0.25 $\Omega$ (4A), 80/230ns	17p			BUK 552-100, 2SK1114, 2SK2175
2 SK 994	Nec	MOS-N-FET-e*	=2SK993: Iso, $\pm$ 7/14A, 30W	17c			BUK 542-60, 2SK1033, 2SK1256, 2SK1344,++
2 SK 995	Mat	MOS-N-FET-e	FREDFET, 550/20V, 5/10A, 60W, <1.8 $\Omega$ (3A), 50/365ns	16c		(TOP-3F)	BUK 627-600
2 SK 996	Mat	MOS-N-FET-e	VFET, 600/20V, 4/8A, 50W, on<1.8 $\Omega$ (2A), 40/360ns	17c			2SK1118, 2SK1404, 2SK1637, 2SK2044,++
2 SK 997	Nec	N-FET	C-Mic Inp, 20V, 10mA, Idss=0.1...0.5mA, Up=0.1...1	40a		(SST)	-
2 SK 998	Nec	N-FET	UHF, 20V, 35mA, Idss=8...32mA, Up=0.35...2.2V	7d		TO-92	-
2 SK 1000	Nec	N-FET	AM Tuner, 22V, 50mA, Idss=10...50mA, Up<2.5V	40a		(SST)	-
2 SK 1001	Nec	N-FET	=2SK1000: SMD	35f		SOT-23	-
2 SK 1002	Nec	N-FET	C-Mic, 20V, 10mA, Idss=0.12...0.5mA, Up<1V, Ur<3 $\mu$ V	40a		(SST)	-
2 SK 1006	Fjd	MOS-N-FET-e	VFET, 450/30V, 5A, 40W, on<1.6 $\Omega$ (2.5A), 60/130ns	=15c			2SK1231...32, 2SK1351, 2SK1608, 2SK1626,++
2 SK 1007	Fjd	MOS-N-FET-e	=2SK1006: 60W	17p		TO-220	BUZ 41A...42, 2SK893, 2SK1156, 2SK1246,++
2 SK 1008	Fjd	MOS-N-FET-e	=2SK1006: 500/30V, 4.5A, 60W, on<2.2 $\Omega$ (2.5A)	17p		TO-220	BUZ 41A...42, 2SK893, 2SK1156, 2SK1246,++
2 SK 1009	Fjd	MOS-N-FET-e	VFET, 450/30V, 7A, 80W, on<1.3 $\Omega$ (3A), 70/130ns	17p		TO-220	IRF 840, IRF 842, 2SK894, 2SK1495...96,++
2 SK 1010	Fjd	MOS-N-FET-e	=2SK1009: 500/30V, 6A, on<1.6 $\Omega$ (3A), 70/130ns	17p		TO-220	IRF 840, IRF 842, 2SK894, 2SK1496,++
2 SK 1011	Fjd	MOS-N-FET-e	VFET, 450/30V, 10A, 100W, on<0.65 $\Omega$ (5A), 110/240ns	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1785,++
2 SK 1012	Fjd	MOS-N-FET-e	=2SK1011: 500/30V, on<0.9 $\Omega$ (5A)	18p		TO-3P	BUZ 339, 2SK896, 2SK1488, 2SK1785,++
2 SK 1013	Fjd	MOS-N-FET-e	VFET, 450/30V, 13A, 125W, on<0.6 $\Omega$ (6A), 140/240ns	18p		TO-3P	2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 1014	Fjd	MOS-N-FET-e	=2SK1013: 500/30V, 12A, on<0.74 $\Omega$ (6A)	18p		TO-3P	2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 1015	Fjd	MOS-N-FET-e	VFET, 450/30V, 18A, 125W, <0.45 $\Omega$ (8A), 170/230ns	18p		TO-3P	2SK1517...18, 2SK1499...1500, 2SK2057,++
2 SK 1016	Fjd	MOS-N-FET-e	=2SK1015: 500/30V, 15A, on<0.55 $\Omega$ (8A)	18p		TO-3P	2SK899, 2SK1678, 2SK1745, 2SK1757,++
2 SK 1017	Fjd	MOS-N-FET-e	VFET, 450/30V, 20A, 150W, on<0.35 $\Omega$ (10A), 250/490ns	18p		TO-3P	2SK1517...18, 2SK1409, 2SK1680, 2SK2057,++
2 SK 1018	Fjd	MOS-N-FET-e	=2SK1017: 500/30V, 18A, on<0.45 $\Omega$ (10A), 250/490ns	18p		TO-3P	2SK1518, 2SK1498, 2SK1680, 2SK2057,++
2 SK 1019	Fjd	MOS-N-FET-e	VFET, 450/30V, 35A, 300W, on<0.2 $\Omega$ (15A), 360/900ns	77p		TOP-3L	2SK1519...20, 2SK1628...29, 2SK1971,++
2 SK 1020	Fjd	MOS-N-FET-e	=2SK1019: 500/30V, 30A, on<0.25 $\Omega$ (15A)	77p		TOP-3L	2SK1520, 2SK1629, 2SK1971
2 SK 1021	Fjd	MOS-N-FET-e	VFET, 800/30V, 3A, 60W, on<6 $\Omega$ (1.5A), 85/160ns	17p		TO-220	BUZ 81, 2SK1501, 2SK1639, 2SK1643,++
2 SK 1022	Fjd	MOS-N-FET-e	=2SK1021: 900/30V, 2.5A, on<7.3 $\Omega$ (1.5A)	17p		TO-220	BUK 456-1000, 2SK1601, 2SK1638, 2SK1793,++
2 SK 1023	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 60W, on<4.5 $\Omega$ (2A), 95/170ns	17p		TO-220	BUZ 81, 2SK1501, 2SK1639, 2SK1643,++
2 SK 1024	Fjd	MOS-N-FET-e	=2SK1023: 900V, 3.5A	17p		TO-220	2SK1457, 2SK1501, 2SK1639, 2SK1643,++
2 SK 1025	Mit	MOS-N-FET-e	VFET, 50/30V, 20A, 45W, on<0.08 $\Omega$ (10A)	17c		SOT-186	BUK 445-50, BUZ 11F, 2SK1095, 2SK1420,++
2 SK 1026	Mit	MOS-N-FET-e	VFET, 250/30V, 20A, 150W, on<0.26 $\Omega$ (10A)	=18p		(TO-3PFH)	2SK944, 2SK1641, 2SK1673...74, 2SK2075,++
2 SK 1027	Mit	MOS-N-FET-e	=2SK1026: 300/30V, on<0.29 $\Omega$ (10A)	=18p		(TO-3PFH)	2SK1409, 2SK1517, 2SK1674, 2SK1680,++
2 SK 1029	Tos	MOS-N-FET-e	VFET, 500/20V, $\pm$ 10/20A, 200W, <0.5 $\Omega$ (10A), 450/400ns	77p		TOP-3L	2SK694
2 SK 1030	Mat	MOS-N-FET-e	VFET, 800/20V, 3A, 50W, on<5 $\Omega$ (2A), 55/40ns	17c		SOT-186	2SK1356, 2SK1460, 2SK1995
2 SK 1030 A	Mat	MOS-N-FET-e	=2SK1030: 900/20V	17c		SOT-186	2SK1356, 2SK1460, 2SK1995
2 SK 1031	Hit	N-FET	SMD, LF, 50V, 10mA, Idss=0.6...6.5mA, Up=0.4...5V	35f		SOT-23	-
2 SK 1032	Mat	MOS-N-FET-e	VFET, 800/20V, 8A, 120W, on<1.7 $\Omega$ (5A), 110/120ns	18p		TO-3P	2SK684, 2SK1342, 2SK1358, 2SK1502,++
2 SK 1032 A	Mat	MOS-N-FET-e	=2SK1032: 900/20V	18p		TO-3P	2SK1342, 2SK1358, 2SK1462, 2SK1614,++
2 SK 1033	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 12A, 45W, <0.1 $\Omega$ (6A), 90/540ns	17c		SOT-186	2SK1093, 2SK1256, 2SK1305...06, 2SK1344,++
2 SK 1034	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 15A, 45W, <0.18 $\Omega$ (6A), 50/385ns	17c		SOT-186	2SK1288, 2SK1306, 2SK1558
2 SK 1035	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 12A, 45W, <0.35 $\Omega$ (6A), 50/420ns	17c		SOT-186	-
2 SK 1036	Mat	MOS-N-FET-e	VFET, 250/20V, 10/20A, 50W, on<0.3 $\Omega$ (5A), 60/320ns	17c		SOT-186	2SK1762, 2SK2011, 2SK2426
2 SK 1037	Mat	MOS-N-FET-e	VFET, 250/20V, 50W	17c		SOT-186	-
2 SK 1038	Mat	MOS-N-FET-e	VFET, 400/20V, 5A, 50W, on<1.8 $\Omega$ (3A)	17c		SOT-186	BUK 445-400, 2SK530, 2SK1377, 2SK1990,++
2 SK 1039	Mat	MOS-N-FET-e	VFET, 400/20V, 8A, 50W, on<1.4 $\Omega$ (5A)	17c		SOT-186	2SK1566...67, 2SK1609, 2SK2116...17,++
2 SK 1040	Mat	MOS-N-FET-e	VFET, 400/20V, 10A, 100W, on<1 $\Omega$ (5A)	16c(p)		(TOP-3F)	BUZ 326, BUZ 351, 2SK1488, 2SK1785,++
2 SK 1041	Mat	MOS-N-FET-e	VFET, 400/20V, 15A, 120W, on<0.55 $\Omega$ (8A)				BUK 637-400, BUZ 323
2 SK 1042	Mat	MOS-N-FET-e	VFET, 400/20V, 20A, 130W, on<0.45 $\Omega$ (10A)				2SK868
2 SK 1043	Nec	GaAs-N-FET-d	UHF, X...K-Band, 4V, Idss=12...60mA, Up=0.3...2V F<1.4/Gp=10dB(12GHz)	51(SGSD)		=SOT-173	-
2 SK 1044	Mit	MOS-N-FET-e	VFET, 800/30V, 5A, 150W, on<1.7 $\Omega$ (2.5A), 80/270ns	=18c		(TO-3PFM) 2SK727	2SK727, 2SK793, 2SK1461, 2SK1649...50,++
2 SK 1045	Mit	MOS-N-FET-e	=2SK1044: 900/30V, on<2 $\Omega$ (2.5A)	=18c		(TO-3PFM) 2SK727	2SK727, 2SK1341, 2SK1649...50, 2SK1794,++
2 SK 1046	Nec	GaAs-N-FET-d	UHF, C...K-Band, 4V, 70mA, Idss=15...70mA, Up=0.3...2V F<1.4/Gp=10dB(12GHz)	51(SGSD)		=SOT-173	-
2 SK 1047	Mit	MOS-N-FET-e	VFET, 250/30V, 20A, 150W, on<0.26 $\Omega$ (10A)	=18c		(TO-3PFM)	2SK944, 2SK1673...74, 2SK1641, 2SK2075,++
2 SK 1048	Mit	MOS-N-FET-e	=2SK1047: 300/30V, on<0.29 $\Omega$ (10A)	=18c		(TO-3PFM)	2SK868(A), 2SK1674
2 SK 1049	Mit	MOS-N-FET-e	VFET, 450/30V, 15A, 150W, on<0.65 $\Omega$ (8A), 160/250ns	=18c		(TO-3PFM)	2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 1050	Mit	MOS-N-FET-e	=2SK1050: 500/30V, on<0.78 $\Omega$ (8A)	=18c		(TO-3PFM)	2SK1610, 2SK1678, 2SK1745, 2SK1757,++
2 SK 1051	Mit	MOS-N-FET-e	VFET, 50/30V, 40A, 120W, on<0.03 $\Omega$ (20A)	=18c		(TO-3PFM)	BUZ 347...348, 2SK1124, 2SK2096, 2SK2233,++
2 SK 1052	Say	MOS-N-FET-e	VFET, 450/20V, 0.5/2A, 30W, on<7 $\Omega$ (0.3A), 18/100ns	17p		TO-220	-
2 SK 1053	Say	MOS-N-FET-e	VFET, 450/20V, 1/4A, 40W, on<4.5 $\Omega$ (0.5A), 19/95ns	17p		TO-220	-
2 SK 1056	Hit	MOS-N-FET-e*	VFET, 120/15V, 7A, 100W, 180/60ns	{2SJ160 18d,p(?)		TO-3P	(2SK405, 2SK413...414)
2 SK 1057	Hit	MOS-N-FET-e*	=2SK1056: 140/15V	{2SJ161 18d,p(?)		TO-3P	(2SK405, 2SK413...414)
2 SK 1058	Hit	MOS-N-FET-e*	=2SK1056: 160/15V	{2SJ162 18d,p(?)		TO-3P	(2SK400)
2 SK 1059(Z)	Nec	MOS-N-FET-e	VFET, 60/20V, $\pm$ 5/20A, 20W, on<0.135 $\Omega$ (3A), 50/140ns	30p		TO-251	2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 1060(Z)	Nec	MOS-N-FET-e	=2SK1059: 100/20V, on<0.27 $\Omega$ (3A)	30p		Z: TO-252	-
2 SK 1061	Tos	MOS-N-FET-e	=2SK982: 0.3W	{2SJ167 41c			2SK1474, 2SK1804, 2SK2016
2 SK 1062	Tos	MOS-N-FET-e	=2SK982: SMD	{2SJ168 35a			BS 170, BST 170, 2SK422...423, 2SK1336
2 SK 1063	Hit	MOS-N-FET-e*	=2SK559: 125W	23a		TO-3	BST 82, 2SK1848
2 SK 1064	Hit	MOS-N-FET-e*	=2SK560: 125W	23a		TO-3	2SK788, 2SK899, 2SK1610, 2SK1678,++
2 SK 1065	Say	N-FET	=2SK968:	35e(2mm)		SOT-323	2SK788, 2SK899, 2SK1610, 2SK1678,++
2 SK 1066	Say	N-FET	=2SK436:	35f(2mm)		SOT-323	-
2 SK 1067	Say	MOS-N-FET-d	=2SK543:	35e(2mm)		SOT-323	-
2 SK 1068	Say	N-FET	=2SK546: SMD	35f(2mm)		SOT-323	-
2 SK 1069	Say	N-FET	=2SK771: SMD	35f(2mm)		SOT-323	-
2 SK 1070	Hit	N-FET	=2SK435: SMD	35f		SOT-23	-
2 SK 1073	Mit	MOS-N-FET-e	=2SK1074: Iso, 45W	17c		SOT-186	2SK1356, 2SK1460, 2SK1995
2 SK 1074	Mit	MOS-N-FET-e	VFET, 800V, 3A, 120W, on<3.6 $\Omega$ (1.5A), 70/140ns	=18p		(TO-3PFM)	2SK603, 2SK726, 2SK954, 2SK1339
2 SK 1078	Tos	MOS-N-FET-e	=2SK940: SMD	39b		SOT-89	2SK1697, 2SK1727, 2SK2109, 2SK2111,++
2 SK 1079	Tos	MOS-N-FET-e	=2SK941: SMD	39b		SOT-89	2SK1079, 2SK1485, 2SK1728, 2SK2112
2 SK 1081	Fjd	MOS-N-FET-e	VFET, 800/30V, 7A, 125W, on<2.2 $\Omega$ (3A), 145/250ns	18p		TO-3P	BUK 638-800, 2SK684, 2SK1032, 2SK1502,++



Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 1082	Fjd	MOS-N-FET-e	=2SK1081: 6A, on<2.8Ω(3A)	18p	TO-3P		BUK 638-800, 2SK684, 2SK1032, 2SK1502,++
2 SK 1083	Fjd	MOS-N-FET-e	VFET, 60/20V, 8A, 20W, on<0.22Ω(4A), 37/70ns	-15c			BUK 542-60, 2SK1261, 2SK1556, 2SK2161
2 SK 1084	Fjd	MOS-N-FET-e	VFET, 100/20V, 5A, 20W, on<0.5Ω(2.5A), 35/55ns	-15c			BUK 542-100, 2SK1260, 2SK1265
2 SK 1085	Fjd	MOS-N-FET-e	VFET, 150/20V, 3A, 20W, on<0.9Ω(1.5A), 33/80ns	-15c			2SK1264...1265
2 SK 1086	Fjd	MOS-N-FET-e	VFET, 60/20V, 20A, 35W, on<0.07Ω(10A), 50/200ns	-15c			2SK1214, 2SK1345, 2SK1951, 2SK2346,++
2 SK 1087	Fjd	MOS-N-FET-e	VFET, 100/20V, 12A, 35W, on<0.17Ω(6A), 62/210ns	-15c			2SK1034, 2SK1306, 2SK1558, 2SK2131
2 SK 1088	Fjd	MOS-N-FET-e	VFET, 150/20V, 9A, 35W, on<0.13Ω(4.5A), 50/180ns	-15c			BUK 545-200, 2SK1035, 2SK2160...61
2 SK 1089	Fjd	MOS-N-FET-e	VFET, 60/20V, 35A, 80W, on<0.035Ω(17.5A), 66/500ns	18p	TO-3P		2SK1297, 2SK1303, 2SK1514, 2SK1665
2 SK 1090	Fjd	MOS-N-FET-e	VFET, 100/20V, 20A, 80W, on<0.08Ω(10A), 55/450ns	18p	TO-3P		2SK1267
2 SK 1091	Fjd	MOS-N-FET-e	VFET, 150/20V, 15A, 80W, on<0.15Ω(7.5A), 55/500ns	18p	TO-3P		2SK1267
2 SK 1092	Hit	GaAs-N-FET	=2SK666: SMD	44(SD-G)	SOT-143		-
2 SK 1093	Hit	MOS-N-FET-e*	=2SK970: Iso, 20W	17c	SOT-186		2SK1033, 2SK1256, 2SK1305...06, 2SK1344
2 SK 1094	Hit	MOS-N-FET-e*	=2SK971: Iso, 25W	17c	SOT-186		2SK1034, 2SK1306, 2SK1345, 2SK1558
2 SK 1095	Hit	MOS-N-FET-e*	=2SK972: Iso, 30W	17c	SOT-186		2SK943, 2SK1345...46, 2SK1348...49
2 SK 1096	Fjd	MOS-N-FET-e	VFET, 60/20V, 13A, 30W, on<0.12Ω(7A), 40/130ns	-15c			2SK1286, 2SK1306, 2SK1558, 2SK1896,++
2 SK 1097	Fjd	MOS-N-FET-e	VFET, 100/20V, 8A, 30W, on<0.28Ω(4A), 40/120ns	-15c			BUK 543-100, 2SK1261, 2SK1556, 2SK2161
2 SK 1098	Fjd	MOS-N-FET-e	VFET, 150/20V, 6A, 30W, on<0.5Ω(3A), 50/120ns	-15c			BUK 545-200, 2SK2161
2 SK 1099	Fjd	MOS-N-FET-e	VFET, 500/20V, 10A, 80W, on<0.67Ω(5A), 130/140ns	18c(p)	TO-3P		2SK1206, 2SK1523, 2SK1696, 2SK1832
2 SK 1100	Mat	GaAs-N-FET	UHF, Ku-Band, 4V, 60mA, Idss=12...60mA, Up>3V Fc<1,1/Gp=11dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1101	Fjd	MOS-N-FET-e	VFET, 450/30V, 10A, 50W, on<0.65Ω(5A), 110/240ns	-15c			2SK2363...64
2 SK 1102	Fjd	MOS-N-FET-e	=2SK1101: 500/30V, on<0.9Ω(5A)	-15c			2SK2364
2 SK 1103	Mat	N-FET	=2SK1104: SMD	35f	SOT-23		-
2 SK 1104	Mat	N-FET	65V, 20mA, Idss=0.2...6mA, Up=1.5<3.5V	{2SJ164	40a		-
2 SK 1105	Fjd	MOS-N-FET-e	VFET, 800/20V, 3A, 80W, on<0.4Ω(1.5A), 60/210ns	18c(p)	TO-3P		BUZ 307, BUZ 360...61, 2SK603, 2SK1339
2 SK 1108	Nec	N-FET	C-Mic Imp, 20V, 10mA, Idss=0.04...0.6mA, Up=0.1...1V	40a	(SST)		-
2 SK 1109	Nec	N-FET	=2SK1108: SMD	-35b			-
2 SK 1112	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 5/20A, 20W, on<0.16Ω(2.5A)	30p	TO-251/252		2SK1471, 2SK1719, 2SK1949, 2SK2231
2 SK 1113	Tos	MOS-N-FET-e	VFET, LogL, 120/20V, 3/12A, 20W, on<0.4Ω(1.5A)	30p	TO-251/252		2SK1474, 2SK2099
2 SK 1114	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 12/48A, 40W, on<0.07Ω(6A)	17p	TO-220		BUK 552-60, 2SK970...971, 2SK1300
2 SK 1115	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 20/80A, 60W, on<0.055Ω(10A)	17p	TO-220		2SK942, 2SK972, 2SK1287, 2SK1910
2 SK 1116	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 25/100A, 100W, on<58mΩ(12A)	17p	TO-220		BUK 555-100, 2SK1347, 2SK1293, 2SK2050
2 SK 1117	Tos	MOS-N-FET-e	VFET, S-Reg, 600V, 6A, 100W	17p	TO-220	IRFBC 40	BUZ90, 2SK1402, 2SK1501, 2SK1639, 2SK1643
2 SK 1118	Tos	MOS-N-FET-e	=2SK1117: Iso, 45W	17c	TO-220 Iso	(IRFBC 40) <sup>3</sup>	2SK1404, 2SK1637, 2SK2044, 2SK2100...01++
2 SK 1119	Tos	MOS-N-FET-e	VFET, SMPS(240V-), 1000V, 4A, 100W, on<3.8Ω(2A)	17p	TO-220		2SK1986
2 SK 1120	Tos	MOS-N-FET-e	VFET, SMPS(240V-), 1000V, 8A, 150W, on<1.8Ω(4A)	18p	TO-3P		2SK1934
2 SK 1121	Mit	MOS-N-FET-e	VFET, 50/20V, 25A, 45W, on<0.03Ω(13A)	17c	SOT-186		BUK 545-50, 2SK943, 2SK1345, 2SK2346
2 SK 1122	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±40/160A, 100W, on<50mΩ(20A)	18p	TO-3P		2SK1263, 2SK1304
2 SK 1123	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±40/160A, 100W, on<27mΩ(20A)	18p	TO-3P		2SK1297, 2SK1514, 2SK1665, 2SK2096
2 SK 1124	Tos	MOS-N-FET-e	VFET, 60/20V, 45/180A, 125W, on<30mΩ(25A), 60/190ns	18p	TO-3P		BUK 439-60, 2SK857, 2SK1379, 2SK2096,++
2 SK 1131	Say	N-FET	Uni, 20V, Idss=0.15...0.8mA	41e			-
2 SK 1132	Nec	MOS-N-FET-e*	VFET, 50/7V, ±0.1/0.2A, 0.25W, <50Ω(20mA), 31/71ns	40c	(SST)		BSS 100, 2SK1398
2 SK 1133	Nec	MOS-N-FET-e*	=2SK1132: SMD	{2SJ165 {2SJ166	35a	SOT-23	BSS 123, 2SK1589, 2SK1591
2 SK 1134	Fjd	MOS-N-FET-e	VFET, 50/20V, 45A, 80W, on<0.03Ω(22A), 170/550ns	18c(p)	TO-3P		BUZ 347, 2SK1379, 2SK1514, 2SK2096,++
2 SK 1135	Hit	MOS-N-FET-e*	VFET, 250/20V, 15/60A, 100W, <0.22Ω(8A), 155/190ns	18p	TO-3P		2SK1401
2 SK 1136	Mit	MOS-N-FET-e	VFET, 50/20V, 10A, 30W, on<0.06Ω(5A)	17c	SOT-186		BUK 543-50, 2SK1256, 2SK1344, 2SK1895,++
2 SK 1137	Mit	MOS-N-FET-e	VFET, 50/20V, 16A, 40W, on<0.035Ω(8A)	17c	SOT-186		BUK 545-50, 2SK943, 2SK1214, 2SK1345...46
2 SK 1138	Mit	MOS-N-FET-e	VFET, 150/20V, 7A, 30W, on<0.3Ω(4A)	17c	SOT-186		BUK 545-200, 2SK2160...61
2 SK 1139	Mit	MOS-N-FET-e	VFET, 150/20V, 13A, 40W, on<0.08Ω(7A)	17c	SOT-186		2SK1266, 2SK2098
2 SK 1142	Mit	MOS-N-FET-e	VFET, 800/30V, 2A, 35W, on<5Ω(1A)	17c	SOT-186		BUK 446-800, 2SK1611, 2SK1834, 2SK1459
2 SK 1143	Mit	MOS-N-FET-e	=2SK1142: 900/30V, on<6Ω(1A)	17c	SOT-186		2SK1174, 2SK1275, 2SK1459
2 SK 1149	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±40/160A, 75W, on<0.05Ω(20A)	18c	TO-3P Iso		-
2 SK 1150	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±40/160A, 75W, on<27mΩ(20A)	18c	TO-3P Iso		2SK1298, 2SK1666, 2SK2203
2 SK 1151(L,S)	Hit	MOS-N-FET-e*	VFET, 450/30V, 1.5/6A, 20W, on<5.5Ω(1A), 15/30ns	30p	TO-251, 252		2SK579...80, 2SK1327, 2SK1672, 2SK2017
2 SK 1152(L,S)	Hit	MOS-N-FET-e*	=2SK1151: 500/30V, on<6Ω(1A)	30p	TO-251, 252		2SK580, 2SK1327, 2SK1672, 2SK2017
2 SK 1153	Hit	MOS-N-FET-e*	VFET, 450/30V, 3/12A, 30W, on<2.8Ω(2A), 27/50ns	17p	TO-220		BUZ 41A...42, 2SK1244, 2SK1493...94
2 SK 1154	Hit	MOS-N-FET-e*	=2SK1153: 500/30V, on<3Ω(2A)	17p	TO-220		BUZ 41A...42, 2SK1244, 2SK1494
2 SK 1155	Hit	MOS-N-FET-e*	VFET, 450/30V, 5/20A, 50W, on<1.4Ω(2.5A), 35/80ns	17p	TO-220		BUZ 41A...42, IRF 830, 2SK893, 2SK1246,++
2 SK 1156	Hit	MOS-N-FET-e*	=2SK1155: 500/30V, on<1.5Ω(2.5A)	17p	TO-220		BUZ 41A...42, IRF 830, 2SK893, 2SK1246,++
2 SK 1157	Hit	MOS-N-FET-e*	VFET, 450/30V, 7/28A, 60W, on<0.8Ω(4A), 70/135ns	17p	TO-220		IRF 840, 2SK894, 2SK1495...96, 2SK1574,++
2 SK 1158	Hit	MOS-N-FET-e*	=2SK1157: 500/30V, on<0.9Ω(4A)	17p	TO-220		IRF 840, 2SK894, 2SK1496, 2SK1574,++
2 SK 1159	Hit	MOS-N-FET-e*	VFET, 450/30V, 8/32A, 60W, on<0.7Ω(4A), 72/145ns	17p	TO-220		IRF 840, 2SK894, 2SK1495...96, 2SK1574,++
2 SK 1160	Hit	MOS-N-FET-e*	=2SK1159: 500/30V, on<0.8Ω(4A)	17p	TO-220		IRF 840, 2SK894, 2SK1496, 2SK1574,++
2 SK 1161	Hit	MOS-N-FET-e*	VFET, 450/30V, 10/30A, 100W, on<0.8Ω(5A), 75/135ns	18p	TO-3P		2SK724, 2SK896, 2SK1488, 2SK1752,++
2 SK 1162	Hit	MOS-N-FET-e*	=2SK1161: 500/30V, on<0.9Ω(5A)	18p	TO-3P		2SK724, 2SK896, 2SK1488, 2SK1753,++
2 SK 1163	Hit	MOS-N-FET-e*	VFET, 450/30V, 10/40A, 100W, on<0.7Ω(5A), 77/145ns	18p	TO-3P		2SK724, 2SK896, 2SK1488, 2SK1752,++
2 SK 1164	Hit	MOS-N-FET-e*	=2SK1163: 500/30V, on<0.8Ω(5A)	18p	TO-3P		2SK724, 2SK896, 2SK1488, 2SK1753,++
2 SK 1165	Hit	MOS-N-FET-e*	VFET, 450/30V, 12/48A, 100W, on<0.55Ω(6A), 90/180ns	18p	TO-3P		2SK899, 2SK1610, 2SK1678, 2SK1745,++
2 SK 1166	Hit	MOS-N-FET-e*	=2SK1165: 500/30V, on<0.6Ω(6A)	18p	TO-3P		2SK899, 2SK1610, 2SK1678, 2SK1745,++
2 SK 1167	Hit	MOS-N-FET-e*	VFET, 450/30V, 15/60A, 100W, <0.36Ω(8A), 140/220ns	18p	TO-3P		2SK899, 2SK1610, 2SK1678, 2SK1745,++
2 SK 1168	Hit	MOS-N-FET-e*	=2SK1167: 500/30V, on<0.4Ω(8A)	18p	TO-3P		2SK899, 2SK1610, 2SK1678, 2SK1745,++
2 SK 1169	Hit	MOS-N-FET-e*	VFET, 450/30V, 20/80A, 120W, <0.25Ω(10A), 147/290ns	18p	TO-3P		2SK870, 2SK1409, 2SK1411, 2SK1497...1500+
2 SK 1170	Hit	MOS-N-FET-e*	=2SK1169: 500/30V, on<0.27Ω(10A)	18p	TO-3P		2SK1411, 2SK1498, 2SK1500, 2SK2057,++
2 SK 1171	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 80W, <4.5Ω(2A), 95/170ns	18p	TO-3P	2SK727	2SK695, 2SK727, 2SK793...94, 2SK1649...50+
2 SK 1172	Fjd	MOS-N-FET-e	=2SK1171: 900/30V, 3.5A, <5.5Ω(2A)	18p	TO-3P	2SK727	2SK794, 2SK1341, 2SK1649...50, 2SK1760
2 SK 1173	Mat	MOS-N-FET-e	50V, 0.5A, 0.2W				-
2 SK 1174	Sak	MOS-N-FET-e	VFET, 900/20V, 2.5A, 40W, on<4Ω	17c	TO-220 Iso		2SK1459, 2SK1994
2 SK 1175	Sak	MOS-N-FET-e	VFET, 900/20V, 4.5A, 85W, on<2.5Ω	18c	TO-3P Iso		2SK809A, 2SK1463, 2SK1684, 2SK1859
2 SK 1176	Sak	MOS-N-FET-e	VFET, 900/20V, 6.5A, 85W, on<1.6Ω	18c	TO-3P Iso		2SK1464, 2SK1685, 2SK1775
2 SK 1177	Sak	MOS-N-FET-e	VFET, 500/20V, 2.5A, 30W, on<4Ω	17c	TO-220 Iso		BUK 444-500, 2SK1758, 2SK1989
2 SK 1178	Sak	MOS-N-FET-e	VFET, 500/20V, 4A, 35W, on<1.5Ω	17c	TO-220 Iso		2SK1232, 2SK1627, 2SK1993, 2SK2115
2 SK 1179	Sak	MOS-N-FET-e	VFET, 500/20V, 8.5A, 85W, on<0.85Ω	18c	TO-3P Iso		2SK1329, 2SK1523, 2SK1696, 2SK1832
2 SK 1180	Sak	MOS-N-FET-e	VFET, 500/20V, 10A, 85W, on<0.6Ω	18c	TO-3P Iso		2SK1329, 2SK1523, 2SK1696, 2SK1832
2 SK 1181	Sak	MOS-N-FET-e	VFET, 500/20V, 13A, 85W, on<0.4Ω	18c	TO-3P Iso		2SK1269, 2SK1331, 2SK1524
2 SK 1182	Sak	MOS-N-FET-e	VFET, 500/20V, 16A, 90W, on<0.27Ω	18c	TO-3P Iso		2SK1269, 2SK1331, 2SK1524
2 SK 1183	Sak	MOS-N-FET-e	VFET, 200/20V, 3A, 25W, on<1.5Ω	17c	TO-220 Iso		-
2 SK 1184	Sak	MOS-N-FET-e	VFET, 200/20V, 5A, 30W, on<0.8Ω	17c	TO-220 Iso		BUZ 73(A)F, 2SK2010
2 SK 1185	Sak	MOS-N-FET-e	VFET, 100/20V, 5A, 25W, on<0.54Ω	17c	TO-220 Iso		BUK 442-100, BUK 542-100, 2SK1260
2 SK 1186	Sak	MOS-N-FET-e	VFET, 100/20V, 9A, 30W, on<0.27Ω	17c	TO-220 Iso		BUK 443-100, BUK 543-100, 2SK1430,++
2 SK 1187	Sak	MOS-N-FET-e	VFET, 100/20V, 12A, 35W, on<0.16Ω	17c	TO-220 Iso		BUK 545-100, 2SK1430...31, 2SK1558,++
2 SK 1188	Sak	MOS-N-FET-e	VFET, 60/20V, 10A, 25W, on<0.2Ω	17c	TO-220 Iso		BUK 442-60, 2SK1033, 2SK1093, 2SK1974,++
2 SK 1189	Sak	MOS-N-FET-e	VFET, 60/20V, 15A, 30W, on<0.1Ω	17c	TO-220 Iso		BUK 445-60, 2SK1094, 2SK1286, 2SK1419

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 1190	Sak	MOS-N-FET-e	VFET, 60/20V, 22A, 35W, on<0,05Ω	17c			BUK 445-60, 2SK1095, 2SK1420, 2SK1951,++
2 SK 1191	Sak	MOS-N-FET-e	VFET, 60/20V, 30A, 40W, on<0,08Ω	17c			2SK1257, 2SK1421, 2SK1653, 2SK1952
2 SK 1192	Sak	MOS-N-FET-e	VFET, 60/20V, 40A, 90W, on<28mΩ	18c			2SK1298, 2SK1424, 2SK1666, 2SK2203
2 SK 1193	Sak	MOS-N-FET-e	VFET, 60/20V, 45A, 95W, on<20mΩ	18c			2SK1298, 2SK1424, 2SK1666, 2SK2203
2 SK 1194	Shi	MOS-N-FET-e	VFET, 230/20V, 0,5A, 6W, on<8Ω(0,5), 60/100ns	30c			2SK1838, 2SK2199
2 SK 1195	Shi	MOS-N-FET-e	VFET, 230/20V, 1,5A, 10W, <2Ω(1A), 75/110ns	30c			2SK375, 2SK535, 2SK945, 2SK1838
2 SK 1196	Mat	GaAs-N-FET	UHF, 6V, 70/200mA, Idss=20...70mA, Up=1<3V F<1,8dB(12GHz)	51(SGSD)		SOT-173	-
2 SK 1197	Hit	MOS-N-FET-e	VFET, HF Out, 100/9V, 0,5/1A, 20W, on<50Ω	14f			-
2 SK 1198	Nec	MOS-N-FET-e	VFET, 700/20V, ±2A, 35W, on<3,2Ω(1A), 70/80ns	17c		-SOT-186	BUK 446-800, 2SK1459, 2SK1611, 2SK1834++
2 SK 1199	Hit	MOS-N-FET-e	VFET, 900/20V, 2/6A, 50W, on<7Ω(1A), 70/125ns	17p			BUZ 50, 2SK1324, 2SK1338
2 SK 1200	Hit	MOS-N-FET-e	VFET, 900/20V, 3/7A, 80W, on<7Ω(1,5A), 80/120ns	18p			2SK726, 2SK794, 2SK1339, 2SK1341
2 SK 1201	Hit	MOS-N-FET-e	VFET, 900/20V, 4/107A, 80W, on<5,5Ω(2A), 95/160	18p		2SK727	BUZ 357...358, 2SK727, 2SK1341, 2SK1760++
2 SK 1202	Hit	MOS-N-FET-e	VFET, 900/20V, 5/12A, 100W, on<4Ω(3A), 125/220ns	18p		2SK727	BUZ 357...358, 2SK727, 2SK1341, 2SK1760++
2 SK 1203	Hit	MOS-N-FET-e	VFET, 900/20V, 6/15A, 100W, on<3Ω(3A), 155/250ns	18p			2SK1342, 2SK1358, 2SK1502, 2SK1614, ++
2 SK 1204	Hit	MOS-N-FET-e	VFET, 900/20V, 8/20A, 100W, on<1,6Ω(4A), 270/410ns	18p			2SK1342, 2SK1358, 2SK1502, 2SK1614, ++
2 SK 1205	Hit	MOS-N-FET-e	VFET, 1000/20V, 5/15A, 100W, on<2Ω(3A), 260/430ns	18p			BUZ 357...358, 2SK685, 2SK1359, 2SK1773
2 SK 1206	Hit	MOS-N-FET-e	=2SK557: Iso, 60W	=18c		(TO-3PFM)	2SK1331, 2SK1523...24
2 SK 1211	Fjd	MOS-N-FET-e	VFET, 800/20V, 2,5A, 40W, <7Ω(1A), 60/110ns	17p			BUZ 80, 2SK1199, 2SK1323...24, 2SK1338
2 SK 1212	Fjd	MOS-N-FET-e	VFET, 900/20V, 5A, 80W, <2,5Ω(2,5A), 110/420ns	17p			2SK1119, 2SK1501, 2SK1639, 2SK1643
2 SK 1213	Tos	MOS-N-FET-e	VFET, 600/20V, 6/24A, 125W, on<1,25Ω(3A), 40/85ns	18p			BUZ 332A, 2SK684, 2SK1032, 2SK1925
2 SK 1214	Mat	MOS-N-FET-e	VFET, LogL, 80/20V, 20/40A, 45W, <0,135Ω(6A)	17c			2SK1307, 2SK1348...49, 2SK1432, 2SK1906++
2 SK 1215	Hit	MOS-N-FET-d	=2SK359: SMD	35c(2mm)			-
2 SK 1216	Mat	N-FET	SMD, Video-Camera, 10V, 50mA, Idss=9,2...14mA, Up<3V	35f			-
2 SK 1217	Fjd	MOS-N-FET-e	VFET, 900/30V, 8A, 100W, on<2Ω(4A), 280/460ns	17c(p)			-
2 SK 1221	Fjd	MOS-N-FET-e	VFET, 250/30V, 10A, 80W, on<0,4Ω(5A), 60/150ns	17p			2SK925...26, 2SK1393, 2SK1761
2 SK 1222	Fjd	MOS-N-FET-e	VFET, 450/30V, 15A, 125W, on<0,55Ω(6A), 140/240ns	18p			2SK899, 2SK1610, 2SK1678, 2SK1757,++
2 SK 1223	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 50/100A, 130W, <45mΩ(13A)	77p			2SK1380
2 SK 1224	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 50W, on<4,5Ω(2A), 95/190ns	17c(p)			2SK1501, 2SK1639, 2SK1643, 2SK1807
2 SK 1225	Hit	MOS-N-FET-e	=2SK556: Iso, 60W	=18c		(TO-3PFM)	2SK1268...69, 2SK1328, 2SK1523...24
2 SK 1227	Tos	N-FET	C-Mic Inp, 15V, Zin>200MΩ, Ur<40mV	41a			-
2 SK 1228	Mat	MOS-N-FET-e	SMD, S, 50/10V, 50/100mA, <50Ω(10mA), 200/200ns	35a			BSS 138, BSS 145, BST 82, 2SK2158
2 SK 1229	Hit	GaAs-N-FET	SHF, 4V, 60mA, Idss=12...60mA, Up=0,3...2,5V F<1,3/Gp>9dB(12GHz)	51(SGSD)			-
2 SK 1230	Hit	MOS-N-FET-e*	=2SK551: Iso, 25W	17c			2SK525, 2SK1035
2 SK 1231	Hit	MOS-N-FET-e*	=2SK552: Iso, 30W	17c			2SK1351, 2SK1608, 2SK1626...27
2 SK 1232	Hit	MOS-N-FET-e*	=2SK553: Iso, 30W	17c			2SK1351, 2SK1608, 2SK1627
2 SK 1233	Say	GaAs-N-FET	UHF, 6V, 0,1A, Idss=20...90mA, Up=0,5...5V F=2dB(8GHz), Gp=11dB(4GHz)	51(SGSD)		-SOT-173	-
2 SK 1234	Say	GaAs-N-FET	UHF, 5V, 0,1A, Idss=20...80mA, Up=0,5...5V F=1,6dB(8GHz), Gp=13dB(4GHz)	51(SGSD)		-SOT-173	-
2 SK 1235	Say	GaAs-N-FET	UHF, 6V, 0,1A, Idss=20...90mA, Up=0,5...5V F<3/Gp>5dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1236	Say	GaAs-N-FET	UHF, 6V, 0,1A, Idss=20...90mA, Up=0,5...5V F<2,8/Gp>6,3dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1237	Say	GaAs-N-FET	UHF, 5V, 0,1A, Idss=20...80mA, Up=0,5...3V F=1,8/Gp>7dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1238	Say	GaAs-N-FET	UHF, 5V, 0,07A, Idss=20...60mA, Up=0,5...2,5V F=1,5/Gp>8dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1239	Say	GaAs-N-FET	=2SK1238: .	52(SGSD)		SOT-100	-
2 SK 1240	Say	GaAs-N-FET	UHF, X-Band, 0,06A, Idss=10...60mA, Up=0,5...2,5 F<1,4/Gp>9dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1241	Say	GaAs-N-FET	UHF, X-Band, 0,06A, Idss=10...60mA, Up=0,5...2,5V F<1,4/Gp>9dB(12GHz)	51(SGSD)		-SOT-173	-
2 SK 1242	Say	GaAs-N-FET	=2SK1240:	52(SGSD)		SOT-100	-
2 SK 1243	Say	GaAs-N-FET	=2SK1241:	52(SGSD)		SOT-100	-
2 SK 1244	Shi	MOS-N-FET-e	VFET, 500/30V, 3A, 40W, on<2,3Ω, 45/75ns	17p			2SK1154, 2SK1494
2 SK 1245	Shi	MOS-N-FET-e	=2SK1244: Iso	15c		(ITO-220)	BUK 445-500, 2SK1572, 2SK1767
2 SK 1246	Shi	MOS-N-FET-e	VFET, 500/30V, 5A, 50W, on<1,4Ω, 50/90ns	17p			BUZ 41A, BUZ 90, 2SK1156, 2SK1751,++
2 SK 1247	Shi	MOS-N-FET-e	=2SK1246: Iso	15c		(ITO-220)	2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 1248	Shi	MOS-N-FET-e	VFET, 500/30V, 10A, 100W, on<0,7Ω, 70/143ns	16p		(MTO-3P)	2SK724, 2SK896, 2SK1488, 2SK1753,++
2 SK 1249	Shi	MOS-N-FET-e	VFET, 500/30V, 15A, 130W, on<0,45Ω, 100/200ns	16p		(MTO-3P)	BUZ338, 2SK725, 2SK899, 2SK1610, 2SK1745
2 SK 1250	Shi	MOS-N-FET-e	VFET, 500/30V, 20A, 150W, on<0,35Ω, 130/260ns	16p		(MTO-3P)	2SK1169...70, 2SK1497...1500, 2SK1680, ++
2 SK 1251	Tos	MOS-N-FET-e*	VFET, 60/20V, 5/20A, 10W, <0,24Ω(2,5A), 13/200ns	=14c			-
2 SK 1252	Tos	MOS-N-FET-e*	VFET, 120/20V, 3/12A, 10W, <0,58Ω(1,5A), 11/120ns	=14c			SOT-82
2 SK 1253	Hit	MOS-N-FET-e*	VFET, LogL, 30/20V, 30A, 35W, <0,03Ω(15A), 155/700ns	17c			2SK1262
2 SK 1254(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 3/12A, 20W, <0,4Ω(2A), 25/195ns	30p			2SK1113, 2SK1284
2 SK 1255	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 5/10A, 30W, <0,3Ω(2A), 29/150ns	17c			BUK 541-60, BUK 542-100, 2SK1260
2 SK 1256	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 10A, 40W, <0,165Ω(3A), 46/330ns	17c			2SK1033, 2SK1093, 2SK1305, 2SK1344,++
2 SK 1257	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 40/80A, 45W, on<0,05Ω(10A)	17c			2SK1653, 2SK1952
2 SK 1258	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 50/100A, 100W, on<45mΩ(13A)	18p			2SK1379, 2SK1381
2 SK 1259	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 100/200A, 150W, on<23mΩ(25A)	77p			-
2 SK 1260	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 5/10A, 30W, <0,6Ω(2A), 26/120ns	17c			BUK 542-100, 2SK1265
2 SK 1261	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 8/16A, 40W, <0,3Ω(3A), 33/280ns	17c			BUK 543-100, 2SK1556
2 SK 1262	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 30/60A, 45W, on<85mΩ(10A)	17c			-
2 SK 1263	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 40/80A, 100W, on<75mΩ(13A)	18p			2SK1304, 2SK1381
2 SK 1264	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 3/6A, 30W, <1,3Ω(2A), 24/132ns	17c			BUK 545-200, 2SK1035
2 SK 1265	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 6/12A, 40W, <0,6Ω(3A), 29/300ns	17c			2SK2098
2 SK 1266	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 20/40A, 45W, on<135mΩ(10A)	17c			-
2 SK 1267	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 25/50A, 100W, on<0,13Ω(12A)	18p			-
2 SK 1268	Hit	MOS-N-FET-e*	=2SK559: Iso, 60W	=18c		(TO-3PFM)	2SK1331, 2SK1453, 2SK1524
2 SK 1269	Hit	MOS-N-FET-e*	=2SK560: Iso, 60W	=18c		(TO-3PFM)	2SK1331, 2SK1524
2 SK 1270	Hit	MOS-N-FET-e	=2SK975: 2A, 10W	14b			2SK1283
2 SK 1271	Nec	MOS-N-FET-e	VFET, 1400/20V, ±5A, 240W, <4Ω(3A), 55/260ns	18p			-
2 SK 1272	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±1/2A, 0,75W, on<0,65Ω(0,5A)	7b			2SK1274, 2SK1733
2 SK 1273	Nec	MOS-N-FET-e*	=2SK1272: SMD, ±2/4A	39b			2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 1274	Nec	MOS-N-FET-e*	=2SK1272: ±1,5/3A, 1W	9c		(SP-8)	2SK975, 2SK1733, 2SK1736
2 SK 1275	Hit	MOS-N-FET-e*	=2SK1199: Iso, 30W	17c			2SK1143, 2SK1459
2 SK 1276	Fjd	MOS-N-FET-e	VFET, 250/20V, 20A, 100W, on<0,2Ω(10A), 80/300ns	18p			2SK901, 2SK944, 2SK1641, 2SK1673...74
2 SK 1277	Fjd	MOS-N-FET-e	VFET, 250/20V, 30A, 150W, on<0,12Ω(15A), 175/600ns	18p			BUZ339, 2SK724, 2SK896, 2SK1488, 2SK1753
2 SK 1278	Fjd	MOS-N-FET-e	VFET, 500/20V, 10A, 100W, on<1,1Ω(5A), 85/290ns	18p			BUZ 338, 2SK1610, 2SK1678, 2SK1757,++
2 SK 1279	Fjd	MOS-N-FET-e	VFET, 500/20V, 15A, 125W, on<0,58Ω(8A), 130/560ns	18p			2SK1409, 2SK1411, 2SK1680, 2SK2057,++
2 SK 1280	Fjd	MOS-N-FET-e	VFET, 500/20V, 18A, 150W, on<0,5Ω(9A), 185/630ns	18p			-

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 1281	Nec	MOS-N-FET-e	VFET, 700/20V, ±4A, 120W, on<3,2Ω(2A), 30/80ns	18p		TO-3P	2SK695, 2SK727, 2SK793, 2SK1649...50, ++
2 SK 1282(Z)	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±3/12A, 20W, on<0,18Ω(2A)	30p		TO-251 Z: TO-252	2SK974
2 SK 1283	Nec	MOS-N-FET-e*	=2SK1282:	14j		TO-126	2SK1285
2 SK 1284(Z)	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±3/12A, 20W, on<0,32Ω(2A)	30p		TO-251/252	2SK1113, 2SK1254, 2SK1299, 2SK2015
2 SK 1285	Nec	MOS-N-FET-e*	=2SK1284:	14j		TO-126	
2 SK 1286	Nec	MOS-N-FET-e*	=2SK1287: Iso, ±15/60A, 30W	17c		TO-220 Iso	2SK943, 2SK1094, 2SK1214, 2SK1345...46
2 SK 1287	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±20/80A, 60W, on<0,07Ω(10A)	17c		TO-220	2SK972, 2SK942, 2SK1115, 2SK1910
2 SK 1288	Nec	MOS-N-FET-e*	=2SK1289: Iso, ±15/60A, 30W	17c		TO-220 Iso	2SK1034, 2SK1306, 2SK1292, 2SK1558, ++
2 SK 1289	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±20/80A, 60W, on<0,15Ω(10A)	17p		TO-220	BUK 555-100, 2SK1116, 2SK1302, 2SK1347
2 SK 1290	Nec	MOS-N-FET-e*	=2SK1291: Iso, ±25/100A, 35W	17c		TO-220 Iso	2SK943, 2SK1095, 2SK1345...46, 2SK1897
2 SK 1291	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±30/120A, 75W, on<45mΩ(15A)	17p		TO-220	2SK1296, 2SK2411
2 SK 1292	Nec	MOS-N-FET-e*	=2SK1293: Iso, ±20/80A, 35W	17c		TO-220 Iso	2SK1262, 2SK1307, 2SK1348...49, 2SK1906
2 SK 1293	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±30/120A, 75W, on<0,08Ω(15A)	17p		TO-220	2SK2050
2 SK 1294	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±40/160A, 35W, <27mΩ(20A)	17c		TO-220 Iso	2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 1295	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, ±30/120A, 75W, on<0,05Ω(15A)	17p		TO-220	2SK2050
2 SK 1296	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 30/120A, 75W, on<28mΩ(15A)	17p		TO-220	2SK1291, 2SK2411
2 SK 1297	Hit	MOS-N-FET-e	VFET, LogL, 60/20V, 40/160A, 100W, on<18mΩ(20A)	18p		TO-3P	2SK1514, 2SK1665, 2SK2096
2 SK 1298	Hit	MOS-N-FET-e*	=2SK1297: Iso, 50W	-18c		(TO-3PFM)	2SK1666, 2SK2203
2 SK 1299(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 3/12A, 20W, on<0,35Ω(2A)	30p		TO-251,252	2SK1113, 2SK1254, 2SK1284
2 SK 1300	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 10/40A, 40W, on<0,25Ω(5A)	17p		TO-220	2SK1559, 2SK1561
2 SK 1301	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 15/60A, 50W, on<0,13Ω(8A)	17p		TO-220	2SK1559, 2SK1561
2 SK 1302	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 20/80A, 50W, on<0,85mΩ(10A)	17p		TO-220	BUK 555-100, 2SK1116, 2SK1289, 2SK1347
2 SK 1303	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 30/120A, 100W, on<0,06Ω(15A)	18p		TO-3P	2SK1122, 2SK1263
2 SK 1304	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 40/160A, 100W, on<0,03Ω(20A)	18p		TO-3P	2SK1122, 2SK1263, 2SK1381
2 SK 1305	Hit	MOS-N-FET-e	=2SK1300: Iso, 25W	17c		SOT-186	BUK 545-100, 2SK1035, 2SK1904
2 SK 1306	Hit	MOS-N-FET-e	=2SK1301: Iso, 30W	17c		SOT-186	2SK1034, 2SK1288, 2SK1558, 2SK2131
2 SK 1307	Hit	MOS-N-FET-e	=2SK1302: Iso, 35W	17c		SOT-186	2SK1266, 2SK1292, 2SK1348...49, 2SK1906
2 SK 1308	Mat	MOS-N-FET-e	VFET, 400/20V, 5/10A, 40W, <1,4Ω(3A), 40/170ns	30c		(TO-220MF)	2SK1691, 2SK2355...56Z
2 SK 1308 A		MOS-N-FET-e	=2SK1308: 450/20V	30c		(TO-220MF)	2SK1691, 2SK2355...56Z
2 SK 1311	Mat	MOS-N-FET-e	SMD, VFET, LogL, 60/20V, 2/4A, <0,45Ω(1A), 16/56ns	39b		SOT-89	2SK1273, 2SK1470, 2SK1717, 2SK2315
2 SK 1313(L,S)	Hit	MOS-N-FET-e	VFET, 450/30V, 5/20A, 50W, on<1,4Ω(2,5A), 35/80ns	30p		(TO-220MF)	2SK1540...41, 2SK1722
2 SK 1314(L,S)	Hit	MOS-N-FET-e	=2SK1313: 500/30V, on<1,5Ω(2,5A)	30p		(TO-220MF)	2SK1541, 2SK1722
2 SK 1315(L,S)	Hit	MOS-N-FET-e*	VFET, 450/30V, 8/32A, 60W, on<0,7Ω(4A), 72/145ns	30p		(TO-220MF)	2SK1864, 2SK2187
2 SK 1316(L,S)	Hit	MOS-N-FET-e*	=2SK1540: 500/30V, on<0,8Ω(4A)	30p		(TO-220MF)	2SK1864, 2SK2187
2 SK 1317	Hit	MOS-N-FET-e	VFET, 1500/20V, 2,5/7A, 100W, on<12Ω(2A), 87/170ns	18p		TO-3P	2SK1835
2 SK 1318	Hit	MOS-N-FET-e	VFET, 120/20V, 20/80A, 35W, <0,12Ω(10A), 84/300ns	17c		SOT-186	2SK1266, 2SK2098
2 SK 1319	Mit	MOS-N-FET-e	VFET, 250/30V, 8A, 75W, on<0,52Ω(4A), 70/100ns	17p		TO-220	2SK741, 2SK1320, 2SK1400, 2SK1667
2 SK 1320	Mit	MOS-N-FET-e	=2SK1319: 300/30V	17p		TO-220	2SK1400
2 SK 1319...1320S		MOS-N-FET-e	=2SK1319...1322:	30p		(TO-220MF)	2SK1621(250V), 2SK2252(250V)
2 SK 1321	Mit	MOS-N-FET-e	VFET, 450/30V, 5A, 75W, on<1,3Ω(3A), 70/100ns	17p		TO-220	BUZ41A...42, 2SK1246, 2SK1751, 2SK2355...56
2 SK 1322	Mit	MOS-N-FET-e	=2SK1321: on<1,6Ω(3A)	17p		TO-220	BUZ41A...42, 2SK1246, 2SK1751, 2SK2355...56
2 SK 1321...1322S		MOS-N-FET-e	=2SK1321...1322:	30p		(TO-220MF)	2SK2355Z...66Z
2 SK 1323	Mit	MOS-N-FET-e	VFET, 800/30V, 2A, 75W, on<6,5Ω(1A), 45/75ns	17p		TO-220	BUZ 80, 2SK1199, 2SK1338
2 SK 1324	Mit	MOS-N-FET-e	=2SK1323: 900/30V	17p		TO-220	2SK1199, 2SK1338
2 SK 1323...1324S		MOS-N-FET-e	=2SK1323...1324:	30p		(TO-220MF)	2SK1647
2 SK 1325	Tos	GaAs-N-FET	UHF, 6V, 0,12A, Idss=40...120mA, Up=0,8...5 F<2,3(Gp>8dB)(12GHz)	51(SGSD)		=SOT-173	
2 SK 1326	Hit	N-FET	Min, Video-Frequ., 10/12V, 20mA, Idss=6...20mA Up=0,3...1,5V	35f		SOT-23	
2 SK 1327(L,S)	Hit	MOS-N-FET-e*	VFET, 600/20V, 1/2A, 20W, <9Ω(0,5A), 20/50ns	{2S}J181 30p		TO-251/252	2SK1533, 2SK1880
2 SK 1328	Hit	MOS-N-FET-e*	VFET, 450/30V, 12/48A, 60W, on<0,55Ω(6A), 90/180ns	=18c		(TO-3PFM)	2SK1206, 2SK1225, 2SK1268...69, 2SK1523++
2 SK 1329	Hit	MOS-N-FET-e*	=2SK1328: 500/30V, on<0,6Ω(6A)	=18c		(TO-3PFM)	2SK1206, 2SK1225, 2SK1269, 2SK1523, ++
2 SK 1330	Mat	MOS-N-FET-e	VFET, 800/20V, 8A, 100W, on<1,7Ω(5A), 110/-ns	16c(p)		(TOP-3F)	2SK1032, 2SK1358, 2SK1502, 2SK1692, ++
2 SK 1330 A	Mat	MOS-N-FET-e	=2SK1330: 900V	16c(p)		(TOP-3F)	2SK1358, 2SK1502, 2SK1692, 2SK1795, ++
2 SK 1331	Mat	MOS-N-FET-e	VFET, 500/20V, 15/30A, 100W, <0,5Ω(8A), 110/430ns	16c		(TOP-3F)	2SK1269, 2SK1524, 2SK1405
2 SK 1332	Say	N-FET	=2SK304: SMD	35f(2mm)		SOT-323	-
2 SK 1333	Tos	MOS-N-FET-e	VFET, 500/20V, ±15A, 200W, on<0,4Ω(15A), 500/350ns	77p		TOP-3L	2SK678, 2SK1544
2 SK 1334	Hit	MOS-N-FET-e*	VFET, 200/20V, 1/2A, <3,8Ω(0,5A), 13/17ns	{2S}J186 39b		SOT-89	-
2 SK 1335(L,S)	Hit	MOS-N-FET-e*	VFET, 200/20V, 3/12A, 20W, on<0,8Ω(2A), 37/50ns	30p		TO-251,252	-
2 SK 1336	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 0,3A, 0,4W, <1,7Ω(0,2A), 6/34ns	7c		TO-92	BST 70, BST 72, 2SK422...423
2 SK 1337	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 0,3A, 0,4W, <4,5Ω(0,2A), 6/32ns	7c		TO-92	BSS 89, BST 74, BST 76, 2SK423
2 SK 1338	Hit	MOS-N-FET-e*	VFET, 900/30V, 2/6A, 50W, on<7Ω(1A), 45/115ns	17p		TO-220	2SK1199, 2SK1324
2 SK 1339	Hit	MOS-N-FET-e*	VFET, 900/30V, 3/7A, 80W, on<7Ω(1,5A), 50/105ns	18p		TO-3P	2SK538, 2SK696, 2SK726...727, 2SK794, ++
2 SK 1340	Hit	MOS-N-FET-e*	VFET, 900/30V, 5/12A, 100W, on<4Ω(3A), 85/180ns	18p		TO-3P	BUZ 357...358, 2SK727, 2SK794, 2SK1760, ++
2 SK 1341	Hit	MOS-N-FET-e*	VFET, 900/30V, 6/15A, 100W, on<3Ω(3A), 100/225ns	18p		TO-3P	2SK1358, 2SK1462, 2SK1502, 2SK1614, ++
2 SK 1342	Hit	MOS-N-FET-e*	VFET, 900/30V, 8/20A, 100W, on<1,6Ω(1,5A), 160/315ns	18p		TO-3P	2SK1358, 2SK1462, 2SK1502, 2SK1614, ++
2 SK 1344	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 12/48A, 30W, on<0,07Ω(6A)	17c		TO-220 Iso	2SK1033, 2SK1094, 2SK1256, 2SK1895, ++
2 SK 1345	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 20/80A, 40W, on<0,055Ω(10A)	17c		TO-220 Iso	2SK1095, 2SK1214, 2SK1951, 2SK2232, ++
2 SK 1346	Tos	MOS-N-FET-e	VFET, 60/20V, 25/100A, 40W, <0,06Ω(15A), 30/110ns	17c		TO-220 Iso	2SK1095, 2SK1214, 2SK1420, 2SK2232, ++
2 SK 1347	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 20/80A, 75W, <85mΩ(10A)	17p		TO-220	BUK 555-100, 2SK1302, 2SK1116, 2SK2050
2 SK 1348	Tos	MOS-N-FET-e	=2SK1347: Iso, 40W	17c		TO-220 Iso	2SK1266, 2SK1307, 2SK1292, 2SK1906
2 SK 1349	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 25/100A, 45W, <58mΩ(12A)	17c		TO-220 Iso	2SK1262, 2SK1292, 2SK1906
2 SK 1350	Tos	MOS-N-FET-e	VFET, 200/20V, 15/60A, 45W, on<0,18Ω(10A), 45/70ns	17c		TO-220 Iso	2SK2012
2 SK 1351	Tos	MOS-N-FET-e	VFET, 500/30V, 5/20A, 40W, on<1,5Ω(2,5A), 30/40ns	17c		TO-220 Iso	2SK1232, 2SK1608, 2SK1627, 2SK1993, ++
2 SK 1352	Tos	MOS-N-FET-e	VFET, 500/30V, 7/28A, 45W, on<0,85Ω(4A), 25/60ns	17c		TO-220 Iso	2SK1567, 2SK1805, 2SK2117
2 SK 1356	Tos	MOS-N-FET-e	VFET, 900/30V, 3/5A, 40W, on<4,3Ω(1,5A), 70/280ns	17c		TO-220 Iso	2SK1460, 2SK1995
2 SK 1357	Tos	MOS-N-FET-e	VFET, 900/30V, 5/15A, 125W, on<2,8Ω(2A), 40/100ns	18p		TO-3P	2SK727, 2SK794, 2SK1341, 2SK1649...50, ++
2 SK 1358	Tos	MOS-N-FET-e	VFET, 900/30V, 9/27A, 150W, on<1,4Ω(4A), 40/100ns	18p		TO-3P	2SK1342, 2SK1502, 2SK1614, 2SK1796, ++
2 SK 1359	Tos	MOS-N-FET-e	VFET, 1000/30V, 5/15A, 125W, on<3,8Ω(2A), 30/70ns	18p		TO-3P	2SK1205, 2SK1773
2 SK 1362	Tos	MOS-N-FET-e	VFET, S-Reg, 900/20V, 5A, 85W, <2,5Ω(3A), 130/480ns	=18c(p)			2SK1463...65, 2SK1684...85, 2SK1859, ++
2 SK 1363	Tos	MOS-N-FET-e	VFET, S-Reg, 900/30V, 8A, 90W, <1,4Ω(4A), 40/100ns	=18c(p)			2SK1465, 2SK1685...86, 2SK1775
2 SK 1365	Tos	MOS-N-FET-e	VFET, S-Reg, 1000/20V, 7A, 90W, <1,8Ω(4A), 40/100ns	=18c(p)			{2SK1120, 2SK1934}³
2 SK 1371	Hit	MOS-N-FET-e	VFET, 450/30V, 20A, 125W, <0,25Ω(10A), 147/290ns	23a		TO-3	2SK1497, 2SK1499, 2SK1517, 2SK1680, ++
2 SK 1372	Hit	MOS-N-FET-e	=2SK1371: 500/30V	23			-
2 SK 1373	Hit	MOS-N-FET-e	VFET, 550/30V, 12A, 100W, <0,67Ω(6A), 90/180ns	18p		TO-3P	BUZ 334, 2SK1723, 2SK1968
2 SK 1374	Mat	MOS-N-FET-e	=2SK1228:	35a(2mm)		SOT-323	-
2 SK 1375	Say	N-FET	=2SK596: SMD	35f(2mm)		SOT-323	-
2 SK 1377	Tos	MOS-N-FET-e	VFET, 400/30V, 5,5/22A, 40W, <1,2Ω(3A), 40/140ns	17c		TO-220 Iso	2SK1231, 2SK1351, 2SK1608, 2SK1626...27, ++
2 SK 1378	Tos	MOS-N-FET-e	VFET, 400/30V, 10/40A, 125W, <0,55Ω(5A), 40/80ns	17p		TO-220	BUZ 61
2 SK 1379	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 50/200A, 150W, on<0,017Ω(25A)	18p		TO-3P	BUK 539-60, 2SK1258
2 SK 1380	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 60/240A, 200W, on<0,011Ω(30A)	77p		TOP-3L	2SK1259
2 SK 1381	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 50/200A, 150W, on<0,032Ω(25A)	18p		TO-3P	-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 1382	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 60/240A, 200W, on<0.02Ω(30A)	77p	TOP-3L	-	-
2 SK 1383		SIT-N-FET-e	Static Inductive Trans., 200/5V, 3A, 8W, <0.3Ω(1A)	2a	TO-39	-	-
2 SK 1384	Fjd	MOS-N-FET-e	VFET, 800/20V, 5A, 80W, on<2Ω(2.5A), 360/420ns	18c(p)	TO-3P	2SK2101	-
2 SK 1385	Fjd	MOS-N-FET-e	VFET, 800/30V, 9A, 100W, on<1.5Ω(4A), 280/460ns	18c(p)	TO-3P	2SK1686, 2SK2148	-
2 SK 1386	Fjd	MOS-N-FET-e	VFET, 450/30V, 7A, 100W, on<1.3Ω(3A), 70/130ns	18p	TO-3P	BUZ 330...331	-
2 SK 1387	Fjd	MOS-N-FET-e	VFET, 60/20V, 35A, 40W, on<35mΩ(17.5A), 66/500ns	=15c	-	2SK1653, 2SK2312	-
2 SK 1388	Fjd	MOS-N-FET-e	VFET, 30/20V, 35A, 60W, on<22mΩ(17.5A), 125/480ns	17p	TO-220	BUK 555-50, 2SK1291, 2SK1296, 2SK2411	-
2 SK 1389	Fjd	MOS-N-FET-e	VFET, 60/20V, 50A, 125W, on<0.025Ω(25A), 150/570ns	18p	TO-3P	2SK1258, 2SK1379, 2SK2121, 2SK2173	-
2 SK 1390	Fjd	MOS-N-FET-e	=2SK1389: 80W	18c(p)	TO-3P	2SK1298, 2SK1666, 2SK2203	-
2 SK 1391	Shi	MOS-N-FET-e	VFET, 250/30V, 6A, 40W, <0.84Ω, 65/80ns	17p	TO-220	2SK477, 2SK741, 2SK924, 2SK1319, 2SK1667	-
2 SK 1392	Shi	MOS-N-FET-e	=2SK1391: Iso, 25W	15c	(ITO-220)	2SK1478, 2SK1568, 2SK1668, 2SK1987, ++	-
2 SK 1393	Shi	MOS-N-FET-e	VFET, 250/30V, 10A, 50W, <0.5Ω, 75/100ns	17p	TO-220	2SK925...926, 2SK1221, 2SK1393, 2SK1762, ++	-
2 SK 1394	Shi	MOS-N-FET-e	=2SK1393: Iso, 30W	15c	(ITO-220)	2SK1036, 2SK1762, 2SK2011, 2SK2426, ++	-
2 SK 1395	Shi	MOS-N-FET-e	VFET, 250/30V, 20A, 100W, on<0.25Ω, 140/160ns	16p	(MT0-3P)	2SK623, 2SK901, 2SK944, 2SK1641, 2SK1673	-
2 SK 1396	Shi	MOS-N-FET-e	VFET, 250/30V, 30A, 120W, on<0.18Ω, 190/240ns	16p	(MT0-3P)	2SK902, 2SK1669, 2SK1671, 2SK1675	-
2 SK 1397	Shi	MOS-N-FET-e	VFET, 250/30V, 40A, 130W, on<0.13Ω, 260/300ns	16p	(MT0-3P)	-	-
2 SK 1398	Nec	MOS-N-FET-e*	VFET, S, 50/7V, ±0.1/0.2A, 0.25W, on<20Ω(10mA)	40c	(SST)	BS 170, BSS 98, 2SK1336	-
			115/63ns	{2SJ184			
2 SK 1399	Nec	MOS-N-FET-e*	=2SK1398: SMD	{2SJ185	35a	SOT-23	BSS 123, BSS 138, BSS 145, 2SK1590
2 SK 1400	Hit	MOS-N-FET-e*	VFET, 300/30V, 7/28A, 50W, on<0.7Ω(4A)	17p	TO-220	2SK554...555, 2SK1320	-
2 SK 1400 A		MOS-N-FET-e*	=2SK1400: 350/30V, on<0.8Ω(4A)	17p	TO-220	2SK554...555, 2SK1495...96	-
2 SK 1401	Hit	MOS-N-FET-e*	VFET, 300/30V, 15/60A, 100W, <0.35Ω(8A), 95/155ns	18p	TO-3P	BUZ 323	-
2 SK 1401 A		MOS-N-FET-e*	=2SK1401: 350/30V, on<0.4Ω(8A)	18p	TO-3P	BUZ 323	-
2 SK 1402	Hit	MOS-N-FET-e*	VFET, 600/30V, 4/16A, 50W, on<2.4Ω(2A), 38/95ns	17p	TO-220	BUZ 90, 2SK1117	-
2 SK 1402 A		MOS-N-FET-e*	=2SK1402: 650/30V, on<2.6Ω(2A)	17p	TO-220	-	-
2 SK 1403	Hit	MOS-N-FET-e*	VFET, 600/30V, 8/32A, 100W, on<1.3Ω(4A), 65/150ns	18p	TO-3P	2SK684, 2SK1032	-
2 SK 1403 A		MOS-N-FET-e*	=2SK1403: 650/30V, on<1.4Ω(4A)	18c	TO-3P	2SK684, 2SK1032	-
2 SK 1404	Hit	MOS-N-FET-e*	VFET, 600/30V, 5/20A, 35W, on<1.5Ω(2.5A), 57/160ns	17c	TO-220 Iso	2SK1118, 2SK1637	-
2 SK 1405	Hit	MOS-N-FET-e*	FREDFET, 600/30V, 15/60A, 60W, <0.5Ω(8A), 155/340ns	=18c	(TO-3PFM)	-	-
2 SK 1406	Mat	MOS-N-FET-e	VFET, 500/20V, 20/40A, 100W, <0.4Ω(10A), 150/620ns	16c	(TOP-3F)	2SK1525	-
2 SK 1407	Rhm	GaAs-N-FET	UHF Converter, 4V, 60mA, Idss=12...60mA, Up=0.2...2V F<1, 1/Gp=10.5dB(12GHz)	51(SGSD)	SOT-173	-	-
2 SK 1408	Mit	MOS-N-FET-e	VFET, 450/30V, 16A, 200W, on<0.31Ω(8A), 135/250ns	=18c	(TO-3PFM)	-	-
2 SK 1409	Mit	MOS-N-FET-e	VFET, 450/30V, 20A, 250W, on<0.25Ω(10A), 180/330ns	=18c	(TO-3PFM)	-	-
2 SK 1410	Mit	MOS-N-FET-e	=2SK1408: 500/30V	=18c	(TO-3PFM)	-	-
2 SK 1411	Mit	MOS-N-FET-e	=2SK1409: 500/30V	=18c	(TO-3PFM)	-	-
2 SK 1412(LS)	Say	MOS-N-FET-e	VFET, 1500/20V, 0.1/0.2A, 20W, <200Ω(50mA), 40/400ns	17c	TO-220 Iso	-	-
2 SK 1413	Say	MOS-N-FET-e	VFET, 1500/20V, 2/4A, 60W, on<11Ω(1A), 30/200ns	18c	TO-3P Iso	2SK2225	-
2 SK 1414	Say	MOS-N-FET-e	VFET, 1500/20V, 6/12A, 200W, <3.5Ω(3A), 110/250ns	77p	TOP-3L	-	-
2 SK 1415	Hit	GaAs-N-FET-d	SHF, 3.5V, 60mA, Idss=12...60mA, F=0.8/Gp=11dB(12G)	-	-	-	-
2 SK 1416	Say	MOS-N-FET-e	VFET, 60/20V, 15/60A, 40W, on<0.08Ω(10A), 55/150ns	17p	TO-220	BUK 552-60, 2SK971...72, 2SK1115	-
2 SK 1417	Say	MOS-N-FET-e	VFET, 60/20V, 25/100A, 60W, <45mΩ(15A), 120/220ns	17p	TO-220	BUK 555-60, 2SK1115, 2SK1296, 2SK1910	-
2 SK 1418	Say	MOS-N-FET-e	VFET, 60/20V, 40/160A, 70W, <26mΩ(25A), 190/380ns	17p	TO-220	BUK 556-60, 2SK1542, 2SK1911	-
2 SK 1419	Say	MOS-N-FET-e	VFET, 60/20V, 15/60A, 25W, on<0.08Ω(10A), 55/150ns	17c	TO-220 Iso	2SK943, 2SK1094, 2SK1345...46, 2SK1951	-
2 SK 1420	Say	MOS-N-FET-e	VFET, 60/20V, 25/100A, 30W, <0.045Ω(15A), 120/220ns	17c	TO-220 Iso	2SK943, 2SK1345...46, 2SK1897, 2SK1951	-
2 SK 1421	Say	MOS-N-FET-e	VFET, 60/20V, 40/160A, 40W, <26mΩ(25A), 190/380ns	17c	TO-220 Iso	2SK1257, 2SK1653, 2SK1952, 2SK2120	-
2 SK 1422	Say	MOS-N-FET-e	VFET, 60/20V, 50/200A, 100W, <26mΩ(25A), 190/380ns	18p	TO-3P	BUK539-60, 2SK1258, 2SK1379, 2SK2121	-
2 SK 1423	Say	MOS-N-FET-e	VFET, 60/20V, 80/320A, 150W, <16mΩ(50A), 400/850ns	18p	TO-3P	-	-
2 SK 1424	Say	MOS-N-FET-e	VFET, 60/20V, 40/160A, 60W, <26mΩ(25A), 190/380ns	18c	TO-3P Iso	2SK1298, 2SK1666, 2SK2203	-
2 SK 1425	Say	MOS-N-FET-e	VFET, 60/20V, 60/240A, 80W, <16mΩ(50A), 400/850ns	18c	TO-3P Iso	-	-
2 SK 1426	Say	MOS-N-FET-e	VFET, 60/20V, 100/400A, 200W, <12mΩ(60A), 700/1250ns	77p	TOP-3L	2SK1259	-
2 SK 1427	Say	MOS-N-FET-e	VFET, 100/20V, 10/40A, 40W, on<0.16Ω(6A), 50/140ns	17p	TO-220	2SK1300	-
2 SK 1428	Say	MOS-N-FET-e	VFET, 100/20V, 20/80A, 60W, on<0.1Ω(12A), 70/210ns	17p	TO-220	BUK 555-100, 2SK1302, 2SK1116, 2SK1347	-
2 SK 1429	Say	MOS-N-FET-e	VFET, 100/20V, 30/120A, 70W, <55mΩ(20A), 120/450ns	17p	TO-220	BUK 456-100, 2SK1293, 2SK1303	-
2 SK 1430	Say	MOS-N-FET-e	VFET, 100/20V, 10/40A, 25W, on<0.16Ω(6A), 50/140ns	17c	TO-220 Iso	BUK 545-100, 2SK1035, 2SK1305, 2SK1904	-
2 SK 1431	Say	MOS-N-FET-e	VFET, 100/20V, 15/60A, 30W, on<0.1Ω(12A), 70/210ns	17c	TO-220 Iso	BUK 445-100, 2SK1288, 2SK1306, 2SK1558	-
2 SK 1432	Say	MOS-N-FET-e	VFET, 100/20V, 25/100A, 40W, <55mΩ(20A), 120/450ns	17c	TO-220 Iso	2SK1292, 2SK1307, 2SK1348...49, 2SK1906	-
2 SK 1433	Say	MOS-N-FET-e	VFET, 100/20V, 30/120A, 100W, <55mΩ(20A), 120/450ns	18p	TO-3P	2SK1303	-
2 SK 1434	Say	MOS-N-FET-e	VFET, 100/20V, 60/240A, 150W, <35mΩ(40A), 240/800ns	18p	TO-3P	2SK1381	-
2 SK 1435	Say	MOS-N-FET-e	VFET, 100/20V, 30/120A, 60W, <55mΩ(20A), 120/450ns	18c	TO-3P Iso	2SK1149	-
2 SK 1436	Say	MOS-N-FET-e	VFET, 100/20V, 50/200A, 80W, <35mΩ(40A), 240/800ns	18c	TO-3P Iso	2SK1149	-
2 SK 1437	Say	MOS-N-FET-e	VFET, 100/20V, 70/280A, 200W, <26mΩ(45A), 350/1100ns	77p	TOP-3L	2SK1382	-
2 SK 1438	Say	MOS-N-FET-e	VFET, 450/30V, 0.3/1.2A, 20W, <12Ω(0.2A), 18/150ns	17p	TO-220	(2SK1052)	-
2 SK 1439	Say	MOS-N-FET-e	VFET, 450/30V, 3/12A, 50W, on<2.6Ω(1.5A), 32/115ns	17p	TO-220	2SK1154, 2SK1244, 2SK1493...94	-
2 SK 1440	Say	MOS-N-FET-e	VFET, 450/30V, 5/20A, 60W, on<1.4Ω(3A), 45/175ns	17p	TO-220	2SK1156, 2SK1246, 2SK1751, 2SK2355...56	-
2 SK 1441	Say	MOS-N-FET-e	VFET, 450/30V, 8/32A, 70W, on<0.8Ω(4A), 60/220ns	17p	TO-220	2SK1495...96, (2SK554...55, 2SK636, 2SK894)	-
2 SK 1442	Say	MOS-N-FET-e	VFET, 450/30V, 12/48A, 70W, on<0.6Ω(6A), 85/330ns	17p	TO-220	2SK1503, 2SK2365...66	-
2 SK 1443(LS)	Say	MOS-N-FET-e	VFET, 450/30V, 1/4A, 20W, on<4.5Ω(0.5A), 19/90ns	17c	TO-220 Iso	2SK1833, 2SK1988...89	-
			LS: lead short				
2 SK 1444(LS)	Say	MOS-N-FET-e	VFET, 450/30V, 3/12A, 25W, on<2.6Ω(1.5A), 32/115ns	17c	TO-220 Iso	BUK 445-450, 2SK1862...63, 2SK2431	-
2 SK 1445(LS)	Say	MOS-N-FET-e	VFET, 450/30V, 5/20A, 30W, on<1.4Ω(3A), 45/175ns	17c	TO-220 Iso	2SK1351, 2SK1608, 2SK1626, 2SK1990...93++	-
2 SK 1446(LS)	Say	MOS-N-FET-e	VFET, 450/30V, 7/28A, 35W, on<0.8Ω(4A), 60/220ns	17c	TO-220 Iso	2SK1352, 2SK1566...67, 2SK1609, 2SK2116++	-
2 SK 1447(LS)	Say	MOS-N-FET-e	VFET, 450/30V, 9/36A, 40W, on<0.6Ω(6A), 85/330ns	17c	TO-220 Iso	-	-
2 SK 1448	Say	MOS-N-FET-e	VFET, 450/30V, 8/32A, 100W, on<0.8Ω(4A), 60/220ns	18p	TO-3P	2SK1495...96, 2SK1574, (BUZ 330...331)	-
2 SK 1449	Say	MOS-N-FET-e	VFET, 450/30V, 12/48A, 120W, on<0.6Ω(6A), 85/330ns	18p	TO-3P	2SK1610, 2SK1745, 2SK1757, 2SK1785, ++	-
2 SK 1450	Say	MOS-N-FET-e	VFET, 450/30V, 20/80A, 150W, <0.3Ω(10A), 140/600ns	18p	TO-3P	2SK1169...70, 2SK1497...1500, 2SK1680, ++	-
2 SK 1451	Say	MOS-N-FET-e	VFET, 450/30V, 8/32A, 50W, on<0.8Ω(4A), 60/220ns	18c	TO-3P Iso	2SK1328...29, 2SK1523, 2SK1696, 2SK1831++	-
2 SK 1452	Say	MOS-N-FET-e	VFET, 450/30V, 10/40A, 60W, on<0.6Ω(6A), 85/330ns	18c	TO-3P Iso	2SK1328...29, 2SK1523, 2SK1696, 2SK1831++	-
2 SK 1453	Say	MOS-N-FET-e	VFET, 450/30V, 16/64A, 70W, <0.3Ω(10A), 140/600ns	18c	TO-3P Iso	2SK1268...69, 2SK1331, 2SK1524...25	-
2 SK 1454	Say	MOS-N-FET-e	VFET, 450/30V, 30/120A, 250W, on<0.16Ω(15A)	77p	TOP-3L	2SK1628...29, 2SK1681, 2SK1971	-
			195/1350ns				
2 SK 1455	Say	MOS-N-FET-e	VFET, 900/30V, 0.2/0.4A, 30W, <70Ω(0.1A), 25/210ns	17p	TO-220	-	-
2 SK 1456	Say	MOS-N-FET-e	VFET, 900/30V, 3/6A, 60W, on<6Ω(1.5A), 40/160ns	17p	TO-220	BUK 456-1000, 2SK1601, 2SK1638, 2SK1793	-
2 SK 1457	Say	MOS-N-FET-e	VFET, 900/30V, 5/10A, 70W, on<3.6Ω(2A), 50/265ns	17p	TO-220	2SK1501, 2SK1639, 2SK1643, 2SK1807	-
2 SK 1458(LS)	Say	MOS-N-FET-e	VFET, 900/30V, 0.2/0.4A, 20W, <70Ω(0.1A), 25/210ns	17c	TO-220 Iso	-	-
			LS: lead short				
2 SK 1459(LS)	Say	MOS-N-FET-e	VFET, 900/30V, 2.5/5A, 30W, on<6Ω(1.5A), 40/160ns	17c	TO-220 Iso	2SK1143, 2SK1174, 2SK1275, 2SK1994	-
2 SK 1460(LS)	Say	MOS-N-FET-e	VFET, 900/30V, 3.5/7A, 40W, on<3.6Ω(2A), 50/265ns	17c	TO-220 Iso	2SK1356, 2SK1995	-
2 SK 1461	Say	MOS-N-FET-e	VFET, 900/30V, 5/10A, 120W, on<3.6Ω(2A), 50/265ns	18p	TO-3P	2SK727	18p
2 SK 1462	Say	MOS-N-FET-e	VFET, 900/30V, 8/16A, 150W, on<1.6Ω(4A), 100/500ns	18p	TO-3P	2SK1341, 2SK1649...50, 2SK1760, 2SK1794	-
2 SK 1463	Say	MOS-N-FET-e	VFET, 900/30V, 4.5/9A, 60W, on<3.6Ω(2A), 50/265ns	18c	TO-3P Iso	2SK1358, 2SK1502, 2SK1614, 2SK1795, ++	-
2 SK 1464	Say	MOS-N-FET-e	VFET, 900/30V, 8/16A, 80W, on<1.6Ω(4A), 100/500ns	18c	TO-3P Iso	2SK1684, 2SK1859, 2SK1175...76	-
2 SK 1465	Say	MOS-N-FET-e	VFET, 900/30V, 8/16A, 200W, on<1.6Ω(4A), 100/500ns	77p	TOP-3L	2SK1685, 2SK1775	-
						2SK1489	-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 1466	Say	MOS-N-FET-e	VFET, 900/30V, 16/32A, 250W, <0.8Ω(8A), 155/1050ns	77p		TOP-3L	-
2 SK 1467	Say	MOS-N-FET-e*	SMD, VFET, LogL, 30/15V, 2/8A, on<0.3Ω(1A), 18/60ns	39b		SOT-89	2SK1311, 2SK1470, 2SK1717, 2SK2315, ++
2 SK 1468	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 4/16A, 20W, <0.12Ω(2A), 30/150ns	30c		TO-251/252	2SK1112, 2SK1471, 2SK1719, 2SK1949, ++
2 SK 1469	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 8/32A, 30W, <55mΩ(4A), 53/250ns	30c		TO-251/252	2SK1472, 2SK1748, 2SK2415
2 SK 1470	Say	MOS-N-FET-e*	SMD, VFET, LogL, 60/15V, 2/8A, <0.45Ω(1A), 16/80ns	39b		SOT-89	2SK1311, 2SK1717, 2SK1763, 2SK2315, ++
2 SK 1471	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 4/16A, 20W, <0.2Ω(2A), 25/120ns	30c		TO-251/252	2SK1112, 2SK1474, 2SK1719, 2SK1949, ++
2 SK 1472	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 8/32A, 30W, <80mΩ(4A), 43/190ns	30c		TO-251/252	2SK1475, 2SK1748, 2SK2415
2 SK 1473	Say	MOS-N-FET-e*	SMD, VFET, LogL, 100/15V, 2/8A, <0.95Ω(1A), 16/80ns	39b		SOT-89	2SK2055
2 SK 1474	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 4/16A, 20W, <0.4Ω(2A), 23/100ns	30c		TO-251/252	2SK1804, 2SK2016
2 SK 1475	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 8/32A, 30W, <0.16Ω(4A) 33/140ns	30c		TO-251/252	2SK1557, 2SK1560
2 SK 1476	Mit	MOS-N-FET-e	VFET, 450/30V, 12A, 150W, on<0.65Ω(6A), 90/140ns	=18p		(TO-3PFM)	2SK1488, 2SK1752, 2SK1785, 2SK2365...66++
2 SK 1477	Mit	MOS-N-FET-e	=2SK1476: 500/30V, on<0.78Ω(6A)	=18p		(TO-3PFM)	2SK1488, 2SK1753, 2SK1785, 2SK2366, ++
2 SK 1478	Mat	MOS-N-FET-e	VFET, 250/20V, 8/16A, 40W, on<0.6Ω(2A), 72/180ns	17c		SOT-186	2SK526, 2SK1036, 2SK1568...69, 2SK1987, ++
2 SK 1479	Hit	N-FET	SMD, Impedance Conv., 25V, 5mA, Idss=0.3...1.4mA Up=0...0.8V	35f		SOT-23	-
2 SK 1480	Nec	MOS-N-FET-d	SMD, FM/VHF, 20/10V, ±30mA, Idss=1...12mA, Up<2V F<3(Gp)-19dB(100MHz)	35e		SOT-23	-
2 SK 1482	Nec	MOS-N-FET-e*	VFET, 30/20V, ±1.5/3A, 0.75W, <0.4Ω(0.5A)	{2SJ196	7b	TO-92	2SK1272, 2SK1274, 2SK1733
2 SK 1483	Nec	MOS-N-FET-e*	=2SK1482: SMD, ±2A	{2SJ197	39b	SOT-89	2SK1273, 2SK1311, 2SK1470, 2SK2315
2 SK 1484	Nec	MOS-N-FET-e*	VFET, 100/20V, ±0.5/1A, 0.75W, <0.8Ω(0.5A)	{2SJ198	7b	TO-92	2SK1729
2 SK 1485	Nec	MOS-N-FET-e*	=2SK1484: SMD, ±1A	{2SJ199	39b	SOT-89	2SK1728, 2SK2112
2 SK 1486	Tos	MOS-N-FET-e*	VFET, 300/30V, 32/125A, 200W, <95mΩ(16A), 325/540ns	77p		TOP-3L	-
2 SK 1487	Tos	MOS-N-FET-e	VFET, 450/30V, 10/40A, 125W, on<1Ω(5A), 70/150ns	18p		TOP-3P	2SK896, 2SK1488, 2SK1723, 2SK1752, ++
2 SK 1488	Tos	MOS-N-FET-e	VFET, 500/30V, 10/40A, 125W, on<1Ω(5A), 60/100ns	18p		TO-3P	2SK896, 2SK1488, 2SK1723, 2SK1753, ++
2 SK 1489	Tos	MOS-N-FET-e	VFET, 1000/30V, 12/48A, 200W, on<1Ω(6A), 140/500ns	77p		TOP-3L	-
2 SK 1491	Nec	MOS-N-FET-e*	VFET, 250/30V, ±25/100A, 120W, <0.15Ω(13A)	18p		TO-3P	2SK1641, 2SK1673...74, 2SK2058, 2SK2075
2 SK 1492	Nec	MOS-N-FET-e*	VFET, 250/30V, ±35/140A, 140W, on<0.1Ω(18A)	18p		TO-3P	2SK902, 2SK1669, 2SK1671, 2SK1675...76
2 SK 1493	Nec	MOS-N-FET-e*	VFET, 450/30V, ±3/12A, 50W, on<2.8Ω(2A), 15/45ns	17p		TO-220	2SK1154, 2SK1244, 2SK1439
2 SK 1494	Nec	MOS-N-FET-e*	=2SK1493: 500/30V, on<3Ω(2A)	17p		TO-220	2SK1154, 2SK1244
2 SK 1493...1494Z	Nec	MOS-N-FET-e*	=2SK1493...1494:	30c		(TO-220MF)	2SK2356Z
2 SK 1495	Nec	MOS-N-FET-e*	VFET, 450/30V, ±7/28A, 70W, on<0.9Ω(4A), 50/90ns	17p		TO-220	IRF 840, IRF 842, 2SK1574
2 SK 1496	Nec	MOS-N-FET-e*	=2SK1495: 500/30V, on<1Ω(4A)	17p		TO-220	IRF 840, IRF 842, 2SK1574
2 SK 1493...1496Z	Nec	MOS-N-FET-e*	=2SK1493...1496:	30c		(TO-220MF)	2SK1540...41
2 SK 1497	Nec	MOS-N-FET-e*	VFET, 450/30V, ±20/80A, 120W, on<0.35Ω(10A)	18p		TO-3P	2SK1499...1500, 2SK1409, 2SK1411, 2SK1680
2 SK 1498	Nec	MOS-N-FET-e*	=2SK1497: 500/30V, on<0.4Ω(10A)	18p		TO-3P	2SK1170, 2SK1411, 2SK1500, 2SK1680
2 SK 1499	Nec	MOS-N-FET-e*	VFET, 450/30V, ±25/100A, 160W, on<0.25Ω(13A)	18p		TO-3P	2SK1169...70, 2SK1409, 2SK1411, 2SK1680
2 SK 1500	Nec	MOS-N-FET-e*	=2SK1499: 500/30V, on<0.27Ω(13A)	18p		TO-3P	2SK1170, 2SK1411, 2SK1680
2 SK 1501	Nec	MOS-N-FET-e*	VFET, 900/30V, ±4/8A, 70W, on<4Ω(2A), 37/105ns	17p		TO-220	2SK1457, 2SK1639, 2SK1643, 2SK1807
2 SK 1501 Z	Nec	MOS-N-FET-e*	=2SK1501:	30c		(TO-220MF)	2SK1528
2 SK 1502	Nec	MOS-N-FET-e*	VFET, 900/30V, ±7/14A, 120W, on<2Ω(2A), 55/190ns	18p		TO-3P	2SK1342, 2SK1614, 2SK1692, 2SK1795
2 SK 1503	Fjd	MOS-N-FET-e	VFET, 500/30V, 10A, 80W, on<0.9Ω(5A), 110/240ns	17p		TO-220	2SK2366
2 SK 1504(L,S)	Fjd	MOS-N-FET-e	=2SK1503:	30p		(TO-220MF)	2SK1865, 2SK2366Z
2 SK 1505	Fjd	MOS-N-FET-e	VFET, 30/20V, 35A, 40W, on<0.022Ω(17.5A)	=15c		-	-
2 SK 1506	Fjd	MOS-N-FET-e	VFET, 120/20V, 50A, 150W, <0.03Ω(25A), 230/1350ns	18p		TO-3P	-
2 SK 1507	Fjd	MOS-N-FET-e	VFET, 600/30V, 9A, 50W, <1Ω(5A), 110/240ns	17c		TO-220 Iso	-
2 SK 1508	Fjd	MOS-N-FET-e	VFET, 60/20V, 35A, 60W, <35mΩ(17.5A), 66/500ns	17p		TO-220	BUK 555-60, 2SK1291, 2SK1296, 2SK2411
2 SK 1509	Fjd	MOS-N-FET-e	VFET, 100/20V, 20A, 60W, <80mΩ(10A), 55/450ns	17p		TO-220	BUZ21, IRF540, IRF542, 2SK1116, 2SK1347+
2 SK 1510(L,S)	Fjd	MOS-N-FET-e	VFET, 900/30V, 3.5A, 60W, on<5.5Ω(2A), 95/170ns	30p		(TO-220MF)	2SK1528, 2SK1659
2 SK 1511	Fjd	MOS-N-FET-e	VFET, 1000V, 5A, 100W, on<3Ω	-		-	-
2 SK 1512	Fjd	MOS-N-FET-e	VFET, 900V, 10A, 150W, on<1.2Ω	-		-	-
2 SK 1513	Tos	MOS-N-FET-e	VFET, 500/20V, 8/16A, 150W, <0.75Ω(8A), 450/400ns	77p		TOP-3L	2SK1029
2 SK 1514	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 40/160A, 125W, on<0.03Ω(20A)	18p		TO-3P	2SK1297, 2SK1665
2 SK 1515	Hit	MOS-N-FET-e*	FREDFET, 450/30V, 10/30A, 100W, <0.8Ω(5A), 80/150ns	18c		TO-3P	BUK 637-450, 2SK683
2 SK 1516	Hit	MOS-N-FET-e*	=2SK1515: 500/30V, on<0.9Ω(5A)	18p		TO-3P	BUK 637-500, 2SK683
2 SK 1517	Hit	MOS-N-FET-e*	FREDFET, 450/30V, 20A, 125W, <0.25Ω(10A), 165/345ns	18p		TO-3P	-
2 SK 1518	Hit	MOS-N-FET-e*	=2SK1517: 500/30V, on<0.27Ω(10A)	18p		TO-3P	-
2 SK 1519	Hit	MOS-N-FET-e*	FREDFET, 450/30V, 30A, 200W, <0.15Ω(15A), 235/615ns	77p		TOP-3L	-
2 SK 1520	Hit	MOS-N-FET-e*	=2SK1519: 500/30V, on<0.16Ω(15A)	77p		TOP-3L	-
2 SK 1521	Hit	MOS-N-FET-e*	FREDFET, 450/30V, 50A, 250W, <0.1Ω(25A), 335/850ns	77p		TOP-3L	-
2 SK 1522	Hit	MOS-N-FET-e*	=2SK1521: 500/30V, on<0.11Ω(25A)	77p		TOP-3L	-
2 SK 1523	Shi	MOS-N-FET-e	=2SK1248: Iso	18c		TO-3P Iso	2SK1206, 2SK1329, 2SK1696, 2SK1832
2 SK 1524	Shi	MOS-N-FET-e	=2SK1249: Iso	18c		TO-3P Iso	2SK1269, 2SK1331, 2SK1405
2 SK 1525	Shi	MOS-N-FET-e	=2SK1250: Iso	18c		TO-3P Iso	2SK1406
2 SK 1526	Hit	MOS-N-FET-e*	VFET, 450/30V, 40A, 250W, on<0.15Ω(20A), 235/580ns	77p		TOP-3L	2SK1521...22
2 SK 1527	Hit	MOS-N-FET-e*	=2SK1526: 500/30V, on<0.16Ω(20A)	77p		TOP-3L	2SK1522
2 SK 1528(L,S)	Hit	MOS-N-FET-e*	VFET, 900/30V, 4/10A, 60W, on<4Ω(2A), 75/180ns	30p		(TO-220MF)	2SK2006
2 SK 1529	Tos	MOS-N-FET-e	VFET, LF Out, 180/20V, 10A, 120W	{2SJ200	18p	TO-3P	-
2 SK 1530	Tos	MOS-N-FET-e	VFET, LF Out, 200/20V, 12A, 150W	{2SJ201	77p	TOP-3L	-
2 SK 1531	Tos	MOS-N-FET-e	VFET, 500/30V, 15/60A, 150W, 0.45Ω(7A), 120/250ns	18p		TO-3P	2SK725, 2SK788, 2SK899, 2SK1745, 2SK1678
2 SK 1532	Hit	N-FET	=2SK1031:	35f(2mm)		SOT-323	-
2 SK 1533	Shi	MOS-N-FET-e	VFET, 900/30V, 1A, 10W, on<15Ω, 40/85ns	30p		TO-251/252	-
2 SK 1534	Shi	MOS-N-FET-e	VFET, 900/30V, 3A, 50W, on<5Ω, 45/110ns	17p		TO-220	2SK791...792, 2SK1456, 2SK1601, 2SK1638++
2 SK 1535	Shi	MOS-N-FET-e	=2SK1534: Iso, 30W	15c		(TO-220)	2SK1356, 2SK1460
2 SK 1536	Shi	MOS-N-FET-e	VFET, 900/30V, 3A, 70W, on<5Ω, 45/110ns	16p		(MTO-3P)	2SK726, 2SK1339
2 SK 1537	Shi	MOS-N-FET-e	VFET, 900/30V, 5A, 100W, on<3Ω, 65/145ns	16p		(MTO-3P)	2SK727, 2SK794, 2SK1649...50, 2SK1794, ++
2 SK 1538	Shi	MOS-N-FET-e	VFET, 900/30V, 7A, 130W, on<2Ω, 80/200ns	16p		(MTO-3P)	2SK1342, 2SK1358, 2SK1462, 2SK1795, ++
2 SK 1539	Shi	MOS-N-FET-e	VFET, 900/30V, 10A, 150W, on<1.4Ω, 115/290ns	16p		(MTO-3P)	2SK1796
2 SK 1540(L,S)	Hit	MOS-N-FET-e	VFET, 450/30V, 7/28A, 60W, on<0.9Ω(4A), 70/135ns	30p		(TO-220MF)	2SK1315...16, 2SK2187, 2SK1864
2 SK 1541(L,S)	Hit	MOS-N-FET-e	=2SK1540: 500/30V, on<0.9Ω(4A)	30p		(TO-220MF)	2SK1316, 2SK2187, 2SK1864
2 SK 1542	Tos	MOS-N-FET-e	VFET, LogL, 60V, 45A, 125W, <0.02Ω(20A), 60/210ns	17p		TO-220	BUK 556-60
2 SK 1544	Tos	MOS-N-FET-e	VFET, 500/30V, 25/100A, 200W, <0.2Ω(13A), 240/590ns	77p		TOP-3L	2SK1629
2 SK 1545	Fjd	MOS-N-FET-e	VFET, 800V, 3A, 40W, on<6Ω	-		-	-
2 SK 1546	Fjd	MOS-N-FET-e	VFET, 900V, 2.5A, 40W, on<7.3Ω	-		-	-
2 SK 1547	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 40W, <4.5Ω(2A), 95/170ns	17c		TO-220 Iso	2SK1404, 2SK1637, 2SK2044...45, 2SK2118++
2 SK 1548	Fjd	MOS-N-FET-e	VFET, 900/30V, 3.5A, 40W, <5.5Ω(2A), 95/170ns	17c		TO-220 Iso	2SK1356, 2SK1460, 2SK1995
2 SK 1549	Fjd	MOS-N-FET-e	VFET, 250/20V, 20A, 80W, <0.15Ω(10A), 100/520ns	18c		TO-3P Iso	2SK822, 2SK2008
2 SK 1550	Fjd	MOS-N-FET-e	VFET, 600V, 4A, 40W, on<1.8Ω	-		-	-
2 SK 1552(L,S)	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 60W, on<4.5Ω(2A), 95/170ns	30p		(TO-220MF)	2SK1528, 2SK2006
2 SK 1553	Fjd	MOS-N-FET-e	VFET, 650/20V, 5A, 40W, on<2.5Ω(2.5A), 55/185ns	17c		TO-220 Iso	2SK1404, 2SK1637, 2SK2044...45, 2SK2118++
2 SK 1554	Fjd	MOS-N-FET-e	VFET, 650V, 3A, 30W, on<4.5Ω	-		-	-
2 SK 1555	Mit	MOS-N-FET-e	VFET, LogL, 50/20V, 16A, 75W, <0.05Ω(8A), 75/500ns	17p		TO-220	BUK 552-50, 2SK971, 2SK1301
2 SK 1555 S	Mit	MOS-N-FET-e	=2SK1555:	30p		(TO-220MF)	2SK1648, 2SK1898, 2SK1908, 2SK2322

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 1556	Mit	MOS-N-FET-e	VFET, LogL, 100/20V, 8A, 30W, <0.2 $\Omega$ (4A), 45/200ns	17c	SOT-186		BUK 543-100, 2SK1261, 2SK1904
2 SK 1557	Mit	MOS-N-FET-e	=2SK1556: 45W	30p	TO-252		2SK1475
2 SK 1558	Mit	MOS-N-FET-e	VFET, LogL, 100/20V, 15A, 40W, <0.09 $\Omega$ (8A), 60/470ns	17c	SOT-186		2SK1034, 2SK1288, 2SK1306, 2SK1558
2 SK 1559	Mit	MOS-N-FET-e	=2SK1558: 75W	17p	TO-220		2SK1301, 2SK1561
2 SK 1559 S		MOS-N-FET-e	=2SK1558:	30p	(TO-220MF)		2SK1908
2 SK 1560	Mit	MOS-N-FET-e	VFET, LogL, 150/20V, 7A, 45W, <0.3 $\Omega$ (4A), 35/185ns	30p	TO-252		-
2 SK 1561	Mit	MOS-N-FET-e	VFET, LogL, 150/20V, 16A, 75W, <0.12 $\Omega$ (8A), 55/500ns	17p	TO-220		BUK 555-200
2 SK 1561 S		MOS-N-FET-e	=2SK1561:	30p	(TO-220MF)		-
2 SK 1562	Mit	MOS-N-FET-e	VFET, 450/30V, 12A, 150W, on<0.65 $\Omega$ (6A), 90/140ns	17p	TO-220		-
2 SK 1563	Mit	MOS-N-FET-e	=2SK1562: 500/30V, on<0.78 $\Omega$ (6A)	17p	TO-220		-
2 SK 1562...1563 S		MOS-N-FET-e	=2SK1562...1563:	30p	(TO-220MF)		2SK1865
2 SK 1564	Mit	MOS-N-FET-e	VFET, 800/30V, 3A, 150W, on<3.6 $\Omega$ (1.5A), 70/140ns	17p	TO-220		-
2 SK 1565	Mit	MOS-N-FET-e	=2SK1564: 900/30V, on<4 $\Omega$ (1.5A)	17p	TO-220		-
2 SK 1564...1565 S		MOS-N-FET-e	=2SK1564...1565:	30p	(TO-220MF)		2SK1510, 2SK1659, 2SK2069
2 SK 1566	Hit	MOS-N-FET-e	=2SK1157: Iso, 35W	17c	SOT-186		2SK1352, 2SK1609, 2SK1805, 2SK2116...17++
2 SK 1567	Hit	MOS-N-FET-e	=2SK1158: Iso, 35W	17c	SOT-186		2SK1352, 2SK1609, 2SK1805, 2SK2117, ++
2 SK 1568	Mit	MOS-N-FET-e	VFET, 250/30V, 8A, 40W, on<0.6 $\Omega$ (4A), 70/100ns	17c	SOT-186		2SK1478, 2SK1668, 2SK1987, 2SK2425
2 SK 1569	Mit	MOS-N-FET-e	=2SK1468: 300V, on<0.65 $\Omega$ (4A)	17c	SOT-186		-
2 SK 1570	Mit	MOS-N-FET-e	VFET, 450/30V, 12A, 150W, on<0.78 $\Omega$ (6A), 90/140ns	=18c	(TO-3PFM)		2SK1488, 2SK1516, 2SK1610, 2SK1785, ++
2 SK 1571	Mit	MOS-N-FET-e	=2SK1570: 500/30, on<0.9 $\Omega$ (6A)	=18c	(TO-3PFM)		2SK1488, 2SK1516, 2SK1610, 2SK1785, ++
2 SK 1572	Hit	MOS-N-FET-e*	VFET, 600/30V, 3/6A, 25W, on<5 $\Omega$ (1A), 33/95ns	17c	SOT-186		2SK1767, 2SK2044, 2SK2144
2 SK 1573	Hit	MOS-N-FET-e*	VFET, 600/30V, 15/60A, 125W, <0.5 $\Omega$ (8A), 140/340ns	18p	TO-3P		2SK1723
2 SK 1574	Tos	MOS-N-FET-e	VFET, 500/30V, 8/32A, 125W, on<0.85 $\Omega$ (4A), 60/100ns	17p	TO-220		IRF 840, 2SK894, 2SK1496, 2SK2360
2 SK 1575	Hit	MOS-N-FET-e*	VFET, Dual, VHF, 180V, 16A, PQ=180W(190MHz)	=			-
2 SK 1576	Son	N-FET	SMD, LF/HF, 30V, 20mA, Idss=2.5...14mA, Up=0.2...1.5V	35f	SOT-23		-
2 SK 1577	Son	N-FET	SMD, VHF/UHF, 35V, 100mA, Idss=30...80mA, Up=1.5...6V	35f	SOT-23		-
2 SK 1578	Say	N-FET	C-Mic, 20V, 10mA, Idss=0.1...0.8mA, Up=0.2...1.5V	40e			-
2 SK 1579	Hit	MOS-N-FET-e*	SMD, VFET, int. Rgate, 12V, $\pm$ 2A, <0.35 $\Omega$ , 500/1500ns	39b	SOT-89		-
2 SK 1580	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 0.1/0.2A, <10 $\Omega$ (1mA), 102/158ns	35a(2mm)	SOT-323		-
2 SK 1581	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 0.2/0.4A, <3 $\Omega$ (1mA), 400/450ns	35a	SOT-23		BSS 123, 2SK1589...91
2 SK 1582	Nec	MOS-N-FET-e*	SMD, VFET, 30/20V, $\pm$ 0.2/0.4A, <3 $\Omega$ (10mA), 255/430ns	35a	SOT-23		BSS 123, 2SK1589...91
2 SK 1583	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 0.5/1A, <1.5 $\Omega$ (0.3A), 455/320ns	39b	SOT-89		BST 80, 2SK1078, 2SK1592, 2SK2109
2 SK 1584	Nec	MOS-N-FET-e*	SMD, VFET, 30/20V, $\pm$ 0.5/1A, <1.5 $\Omega$ (0.3A), 350/210ns	39b	SOT-89		BST 80, 2SK1078, 2SK1592, 2SK2109
2 SK 1585	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 1/2A, on<1 $\Omega$ (0.5A), 340/295ns	39b	SOT-89		2SK1726, 2SK2111
2 SK 1586	Nec	MOS-N-FET-e*	SMD, VFET, 30/20V, $\pm$ 1/2A, on<0.6 $\Omega$ (0.5A), 270/440ns	39b	SOT-89		2SK1726, 2SK2111
2 SK 1587	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 2/4A, on<0.5 $\Omega$ (1A), 800/350ns	39a	SOT-89		2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 1588	Nec	MOS-N-FET-e*	SMD, VFET, 16/16V, $\pm$ 3/6A, on<0.3 $\Omega$ (1A), 790/280ns	39b	SOT-89		2SK2054
2 SK 1589	Nec	MOS-N-FET-e*	SMD, VFET, 100/20V, $\pm$ 0.1/0.2A, <25 $\Omega$ (10mA), 277/106ns	35a	SOT-23		BSS 123
2 SK 1590	Nec	MOS-N-FET-e*	SMD, VFET, 60/20V, $\pm$ 0.2/0.4A, <3 $\Omega$ (10mA), 190/390ns	35a	SOT-23		BST 82
2 SK 1591	Nec	MOS-N-FET-e*	SMD, VFET, 100/20V, $\pm$ 0.2/0.4A, <6.5 $\Omega$ (10mA), 160/320ns	35a	SOT-23		-
2 SK 1592	Nec	MOS-N-FET-e*	SMD, VFET, 60/20V, $\pm$ 0.5/1A, on<2 $\Omega$ (0.5A), 210/250ns	39b	SOT-89		BST 80, 2SK1078, 2SK1697, 2SK2109
2 SK 1593	Nec	MOS-N-FET-e*	SMD, VFET, 100/20V, $\pm$ 0.5/1A, <5 $\Omega$ (0.5A), 200/230ns	39b	SOT-89		2SK1079, 2SK1728, 2SK2110
2 SK 1594	Nec	MOS-N-FET-e*	VFET, LogL, 30/20V, 20/80A, 30W, on<45m $\Omega$ (10A)	17c	TO-220 Iso		BUK545-50, 2SK1214, 2SK1897, 2SK1345...46
2 SK 1595	Nec	MOS-N-FET-e*	VFET, LogL, 30/20V, $\pm$ 30/120A, 35W, on<0.03 $\Omega$ (15A)	17c	TO-220 Iso		2SK1262, 2SK1653, 2SK1952, 2SK2120
2 SK 1596	Nec	MOS-N-FET-e*	VFET, LogL, 30/20V, $\pm$ 40/160A, 35W, on<0.02 $\Omega$ (20A)	17c	TO-220 Iso		2SK1352, 2SK1653, 2SK1952, 2SK2120
2 SK 1600	Tos	MOS-N-FET-e	VFET, 800/30V, 3/9A, 75W, on<5 $\Omega$ (1.5A), 40/150ns	17p	TO-220		BUK 456-800, 2SK1456, 2SK1638
2 SK 1601	Tos	MOS-N-FET-e	=2SK1600: 900/30V, on<6.4 $\Omega$ (1.5A)	17p	TO-220		BUK 456-1000, 2SK1456, 2SK1638, 2SK1793
2 SK 1602	Tos	MOS-N-FET-e	=2SK1600: 2.8/8.4A, 40W	17c	TO-220 Iso		2SK1356, 2SK1460, 2SK1995
2 SK 1603	Tos	MOS-N-FET-e	=2SK1601: 2.5/7.5A, 40W	17c	TO-220 Iso		2SK1356, 2SK1460, 2SK1995
2 SK 1605	Mat	MOS-N-FET-e	VFET, 450/30V, 5/10A, 50W, on<1.3 $\Omega$ (4A), 70/115ns	17c	SOT-186		2SK1351, 2SK1626...27, 2SK2114...15, ++
2 SK 1606	Mat	MOS-N-FET-e	VFET, 450/30V, 8/16A, 50W, on<0.75 $\Omega$ (4A), 70/200ns	17c	SOT-186		2SK1352, 2SK1566...1567, 2SK2116...17, ++
2 SK 1607	Mat	MOS-N-FET-e	VFET, 450/30V, 13/26A, 120W, <0.45 $\Omega$ (7A), 110/310ns	18p	TO-3P		BUZ338, 2SK788, 2SK899, 2SK1678, 2SK1745
2 SK 1608	Mat	MOS-N-FET-e	VFET, 500/30V, 5/10A, 50W, on<1.7 $\Omega$ (3A), 60/120ns	17c	SOT-186		BUK 445-500, 2SK1351, 2SK1627, 2SK1863++
2 SK 1609	Mat	MOS-N-FET-e	VFET, 500/30V, 8/16A, 50W, on<1 $\Omega$ (4A), 100/200ns	17c	SOT-186		2SK1352, 2SK1567, 2SK2117, 2SK1805, ++
2 SK 1610	Mat	MOS-N-FET-e	VFET, 500/30V, 13/26A, 120W, <0.6 $\Omega$ (7A), 100/300ns	18p	TO-3P		BUZ338, 2SK788, 2SK899, 2SK1678, 2SK1757
2 SK 1611	Mat	MOS-N-FET-e	VFET, 800/30V, 3/6A, 50W, on<4 $\Omega$ (2A), 40/140ns	17c	SOT-186		2SK1356, 2SK1460, 2SK1995
2 SK 1612	Mat	MOS-N-FET-e	VFET, 900/30V, 3/6A, 50W, on<5 $\Omega$ (2A), 40/140ns	17c	SOT-186		2SK1356, 2SK1460, 2SK1995
2 SK 1613	Mat	MOS-N-FET-e	VFET, 900/30V, 5/10A, 120W, on<2.8 $\Omega$ (3A), 90/230ns	18p	TO-3P	2SK727	2SK685, 2SK727, 2SK1461, 2SK1649...50
2 SK 1614	Mat	MOS-N-FET-e	VFET, 900/30V, 8/16A, 120W, on<1.7 $\Omega$ (4A), 100/230ns	18p	TO-3P		2SK1120, 2SK1358, 2SK1502, 2SK1692, ++
2 SK 1615	Hit	GaAs-N-FET	SHF, 3.5V, 60mA, Idss=12...60mA, Up=0.3...2.5V	51(SGSD)	SOT-173		-
2 SK 1616	Hit	GaAs-N-FET	SHF, 3.5V, 70mA, Idss=12...70mA, Up=0.3...2.5V	52(SGSD)	SOT-100		-
2 SK 1617	Hit	GaAs-N-FET	SHF, 3.5V, 60mA, Idss=12...60mA, Up=0.3...2.5V	52(SGSD)	SOT-100		-
2 SK 1618	Hit	MOS-N-FET-e*	VFET, 600/30V, 3/6A, 30W, on<5 $\Omega$ (1A), 33/95ns	30p	(TO-220MF)		2SK1510, 2SK1624, 2SK1659, 2SK1858
2 SK 1619	Hit	GaAs-N-FET	UHF, 3V, 0.06A, Idss=15...60mA, Up=0.2...2V	52(SGSD)	=TO-100		-
2 SK 1620(L,S)	Hit	MOS-N-FET-e*	VFET, 150/20V, 10/40A, 50W, on<0.15 $\Omega$ (5A), 70/110ns	30p	(TO-220MF)		2SK1636, 2SK1741, 2SK1907
2 SK 1621(L,S)	Hit	MOS-N-FET-e*	VFET, 250/20V, 7/28A, 50W, on<0.55 $\Omega$ (4A), 60/120ns	30p	(TO-220MF)		2SK1636, 2SK2252
2 SK 1622(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 25/100A, 50W, on<0.04 $\Omega$ (15A)	30p	(TO-220MF)		2SK1918
2 SK 1623(L,S)	Hit	MOS-N-FET-e*	VFET, 100/20V, 20/80A, 50W, <85m $\Omega$ (10A), 112/450ns	30p	(TO-220MF)		2SK1813
2 SK 1624(L,S)	Hit	MOS-N-FET-e*	VFET, 600/30V, 4/16A, 50W, on<2.4 $\Omega$ (2A), 38/95ns	30p	(TO-220MF)		-
2 SK 1625(L,S)	Hit	MOS-N-FET-e*	VFET, 600/30V, 7/28A, 75W, on<1.3 $\Omega$ (4A), 65/150ns	30p	(TO-220MF)		-
2 SK 1626	Hit	MOS-N-FET-e*	=2SK1155: Iso, 35W	17c	SOT-186		2SK1231...2, 2SK1351, 2SK1608, 2SK2114...5
2 SK 1627	Hit	MOS-N-FET-e*	=2SK1156: Iso, 35W	17c	SOT-186		2SK1232, 2SK1351, 2SK1608, 2SK2115
2 SK 1628	Hit	MOS-N-FET-e*	VFET, 450/30V, 30/120A, 200W, <0.25 $\Omega$ (15A), 172/300ns	77p	TOP-3L		2SK1519...20
2 SK 1629	Hit	MOS-N-FET-e*	=2SK1628: 500/30V, on<0.27 $\Omega$ (15A)	77p	TOP-3L		2SK1520
2 SK 1630	Mit	MOS-N-FET-e	VFET, 700/30V, 3A, 75W, on<4.4 $\Omega$ (2A), 55/85ns	17p	TO-220		2SK1456, 2SK1600...01, 2SK1638, 2SK1793++
2 SK 1631	Mit	MOS-N-FET-e	=2SK1630: Iso, 35W	17c	SOT-186		2SK1356, 2SK1460, 2SK1995
2 SK 1632	Mit	MOS-N-FET-e	VFET, 700/30V, 5A, 100W, on<2.3 $\Omega$ (3A), 80/125ns	17p	TO-220		2SK1117, 2SK1402, 2SK1501, 2SK1807, ++
2 SK 1632 S		MOS-N-FET-e	=2SK1632:	30p	(TO-220MF)		2SK2089
2 SK 1633	Mit	MOS-N-FET-e	=2SK1632: Iso, 45W	17c	SOT-186		2SK1808, 2SK1985, 2SK2101
2 SK 1634	Mit	MOS-N-FET-e	=2SK1632: 150W	=18p	(TO-3PFM)		2SK1341, 2SK1461, 2SK1760, 2SK1794
2 SK 1635	Mat	MOS-N-FET-e	VFET, 60/20V, 50/100A, 130W, <23m $\Omega$ (25A), 380/730ns	77p	TOP-3L		2SK1223, 2SK1380, 2SK1382, 2SK1437
2 SK 1636(L,S)	Hit	MOS-N-FET-e*	VFET, 250/30V, 15/60A, 75W, <0.27 $\Omega$ (8A), 109/170ns	30p	(TO-220MF)		2SK2063, 2SK2133Z, 2SK2254
2 SK 1637	Hit	MOS-N-FET-e*	VFET, 600/30V, 4/16A, 35W, on<2.4 $\Omega$ (2A), 38/95ns	17c	SOT-186		2SK1118, 2SK1404, 2SK2097, 2SK2118
2 SK 1638	Hit	MOS-N-FET-e	VFET, 900/20V, 3A, 60W, on<5.5 $\Omega$ (2A), 95/160ns	17p	TO-220		BUK 456-1000, 2SK1456, 2SK1601, 2SK1793
2 SK 1639	Hit	MOS-N-FET-e	VFET, 900/20V, 4A, 75W, on<4 $\Omega$ (2A), 115/230ns	17p	TO-220		2SK1119, 2SK1501, 2SK1639, 2SK1643

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 1641	Tos	MOS-N-FET-e	VFET, 250/30V, 20/80A, 150W, <0.23Ω(10A), 150/350ns	18p	TO-3P		2SK623, 2SK901, 2SK944, 2SK1673...74
2 SK 1642	Tos	MOS-N-FET-e	VFET, 400/30V, 9/36A, 45W, on<0.55Ω(5A), 40/100ns	17c	TO-220 Iso		2SK1609
2 SK 1643	Tos	MOS-N-FET-e	VFET, 900/30V, 5/15A, 125W, on<2.8Ω(2A), 30/70ns	17p	TO-220		2SK1639, 2SK1501
2 SK 1647(L,S)	Hit	MOS-N-FET-e*	VFET, 900/30V, 2/6A, 50W, on<7Ω(1A), 45/110ns	30p	(TO-220MF)		2SK2005
2 SK 1648(L,S)	Hit	MOS-N-FET-e*	VFET, 60/20V, 15/60A, 40W, on<0.065Ω(8A), 80/300ns	30p	(TO-220MF)		2SK1622, 2SK1918, 2SK2284, 2SK2322
2 SK 1649	Tos	MOS-N-FET-e	VFET, 900/30V, 6/18A, 150W, on<2.5Ω(3A), 60/320ns	18p	TO-3P		2SK1358, 2SK1502, 2SK1614, 2SK1795, ++
2 SK 1650	Tos	MOS-N-FET-e	VFET, 900/30V, 4/12A, 125W, <4.3Ω(1.5A), 38/180ns	18p	TO-3P	2SK727	2SK727, 2SK1461, 2SK1760, 2SK94, ++
2 SK 1653	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45/180A, 45W, on<0.02Ω(20A)	17c	TO-220 Iso		2SK1257, 2SK1952, 2SK2120
2 SK 1654	Mit	MOS-N-FET	250V, 16A	17p	TO-220		-
2 SK 1655	Mit	MOS-N-FET	300V, 16A	17p	TO-220		-
2 SK 1656	Nec	MOS-N-FET-e*	VFET, 30/7V, ±0.1/0.2A, 0.25W, <25Ω(10mA), 73/77ns	40c	(SST)		BS 170, BSS 98, 2SK1398
2 SK 1657	Nec	MOS-N-FET-e*	=2SK1657: SMD	35a	SOT-23		BSS 123, 2SK1589...91
2 SK 1658	Nec	MOS-N-FET-e*	=2SK1657: SMD	35a(2mm)	SOT-323		-
2 SK 1659(L,S)	Fjd	MOS-N-FET-e	VFET, 900/20V, 3A, 80W, on<5Ω(1.5A), 60/210ns	30p	(TO-220MF)		2SK1510, 2SK1528
2 SK 1660	Fjd	MOS-N-FET-e	VFET, 450V, 10A, 80W, <0.65Ω				-
2 SK 1661	Fjd	MOS-N-FET-e	VFET, 200V, 20A, 80W, <0.17Ω				-
2 SK 1662	Fjd	MOS-N-FET-e	VFET, 700V, 3A, 40W, <5.5Ω				-
2 SK 1663(L,S)	Fjd	MOS-N-FET-e	VFET, 800/20V, 3A, 80W, on<4Ω(1.5A), 60/210ns	30p	(TO-220MF)		2SK1510, 2SK1528, 2SK1659
2 SK 1664	Nec	MOS-N-FET-e	VFET, 700/30V, ±2/8A, 30W, <0.6Ω(1A), 20/50ns	17c	TO-220 Iso		BUK 446-800, 2SK1142, 2SK1611, 2SK1834
2 SK 1665	Hit	MOS-N-FET-e	VFET, LogL, 60/20V, 45/180A, 125W, on<0.02Ω(20A)	18p	TO-3P		BUK 539-60, 2SK1379, 2SK1297, 2SK1514
2 SK 1666	Hit	MOS-N-FET-e	=2SK1665: Iso, 60W	-18c	(TO-3PFM)		2SK1298, 2SK1653
2 SK 1667	Hit	MOS-N-FET-e*	VFET, 250/30V, 7/28A, 50W, on<0.55Ω(4A), 68/102ns	17p	TO-220		2SK741, 2SK1319...20, 2SK1400
2 SK 1668	Hit	MOS-N-FET-e*	=2SK1667: Iso	17c	SOT-186		2SK1478, 2SK1568...69
2 SK 1669	Hit	MOS-N-FET-e*	FREDFET, 250/30V, 30A, 125W, <95mΩ(15A), 215/420ns	18p	TO-3P		-
2 SK 1670	Hit	MOS-N-FET-e*	=2SK1669: Iso, 60W	-18c	(TO-3PFM)		-
2 SK 1671	Hit	MOS-N-FET-e*	VFET, 250/30V, 30/120A, 125W, <95mΩ(15A), 215/380ns	18p	TO-3P		2SK902, 2SK1492, 2SK1675...76
2 SK 1672	Shi	MOS-N-FET-e	VFET, 500/30V, 1A, 10W, on<7Ω, 40/65ns	30p	TO-251/252		2SK580, 2SK1152, 2SK1327, 2SK2017
2 SK 1673	Mit	MOS-N-FET-e	VFET, 250/30V, 2/4A, 200W, on<0.17Ω(12A), 165/260ns	-18c	(TO-3PFM)		2SK1675, 2SK1676
2 SK 1674	Mit	MOS-N-FET-e	=2SK1673: 300/30V, on<0.2Ω(12A)	-18c	(TO-3PFM)		2SK1676
2 SK 1675	Mit	MOS-N-FET-e	VFET, 250/30V, 30A, 250W, on<0.13Ω(15A), 220/350ns	-18c	(TO-3PFM)		-
2 SK 1676	Mit	MOS-N-FET-e	=2SK1675: 300/30V, on<0.15Ω(15A)	-18c	(TO-3PFM)		-
2 SK 1677	Mit	MOS-N-FET-e	VFET, 450/30V, 16A, 200W, on<0.39Ω(8A), 135/230ns	-18c	(TO-3PFM)		2SK1409, 2SK1411
2 SK 1678	Mit	MOS-N-FET-e	=2SK1677: 500/30V, on<0.47Ω(8A)	-18c	(TO-3PFM)		2SK1411
2 SK 1679	Mit	MOS-N-FET-e	VFET, 450/30V, 20A, 250W, on<0.3Ω(10A), 180/320ns	-18c	(TO-3PFM)		2SK1409, 2SK1411
2 SK 1680	Mit	MOS-N-FET-e	=2SK1679: 500/30V, on<0.35Ω(10A)	-18c	(TO-3PFM)		2SK1411
2 SK 1681	Shi	MOS-N-FET-e	VFET, 500/30V, 30A, 300W, on<0.23Ω, 240/460ns	77p	TOP-3L		2SK1629
2 SK 1682	Son	N-FET	SMD, AM/FM, 30V, 20mA, Idss=1...10mA, Up=0.2...4V	35f	SOT-23		2SK374
2 SK 1683	Shi	MOS-N-FET-e	=2SK1536: Iso, 50W	18c	TO-3P Iso		2SK1463
2 SK 1684	Shi	MOS-N-FET-e	=2SK1537: Iso, 55W	18c	TO-3P Iso		2SK1463
2 SK 1685	Shi	MOS-N-FET-e	=2SK1538: Iso, 65W	18c	TO-3P Iso		2SK1464
2 SK 1686	Shi	MOS-N-FET-e	=2SK1539: Iso, 70W	18c	TO-3P Iso		-
2 SK 1687	Mat	GaAs-N-FET	UHF, X...Ku-Band, 4V, 60mA, Idss=12...60mA, Up<2V F<0.85/Gp=11dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1688	Mat	GaAs-N-FET	UHF, X...Ku-Band, 4V, 60mA, Idss=12...60mA, Up<2V F<0.75/Gp=11dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1689	Mat	GaAs-N-FET	UHF, X...Ku-Band, 6V, 70mA, Idss=12...70mA, Up<3V F<1.7/Gp=11dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1690	Say	MOS-N-FET-e	VFET, 450/30V, 3/12A, 50W, on<2.6Ω(1.5A), 32/115ns	30p	(TO-220MF)		2SK1691
2 SK 1691	Say	MOS-N-FET-e	VFET, 450/30V, 5/20A, 60W, on<1.4Ω(3A), 45/175ns	30p	(TO-220MF)		2SK2042
2 SK 1692	Tos	MOS-N-FET-e	VFET, 900/30V, 7/21A, 150W, on<2Ω(3.5A), 100/360ns	18p	TO-3P		2SK1342, 2SK1358, 2SK1614, 2SK1795, ++
2 SK 1693	Shi	MOS-N-FET-e	VFET, 500/30V, 8A, 60W, on<0.85Ω, 60/120ns	17p	TO-220		IRF 840, IRF 842, 2SK1496, 2SK1574, ++
2 SK 1694	Shi	MOS-N-FET-e	=2SK1693: Iso, 35W	15c	(ITO-220)		2SK1352, 2SK1567, 2SK1609, 2SK1805, ++
2 SK 1695	Shi	MOS-N-FET-e	VFET, 500/30V, 10A, 80W, on<0.85Ω, 60/120ns	16p	(MT0-3P)		2SK724, 2SK896, 2SK1488, 2SK1753, ++
2 SK 1696	Shi	MOS-N-FET-e	=2SK1695: Iso, 50W	18c	TO-3P Iso		2SK1206, 2SK1329, 2SK1523, 2SK1832
2 SK 1697	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, 0.5A, <1.7Ω(0.3A), 11/32ns	39b	SOT-89		2SK1079, 2SK2109
2 SK 1698	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, 0.3A, <4.5Ω(0.2A), 6/32ns	39b	SOT-89		2SK1079
2 SK 1699	Mit	MOS-N-FET-e	VFET, S-Reg, 450/30V, 5A, 75W, <1.8Ω(3A), 37/55ns	17p	TO-220		BUZ 41A...42, 2SK1246, 2SK1751, 2SK2356++
2 SK 1699 S	Mit	MOS-N-FET-e	=2SK1699:	30p	(TO-220MF)		2SK2356Z
2 SK 1700	Mit	MOS-N-FET-e	=2SK1699: Iso, 35W	17c	SOT-186		2SK1231...32, 2SK1351, 2SK1608, 2SK1626++
2 SK 1701	Mit	MOS-N-FET	450V, 8A	17p	TO-220		-
2 SK 1702	Mit	MOS-N-FET	450V, 8A	17c(p)	TO-220		-
2 SK 1703	Mit	MOS-N-FET-e	VFET, S-Reg, 500/30V, 5A, 75W, on<2.4Ω(3A), 45/80ns	17p	TO-220		BUZ 41A...42, 2SK1246, 2SK1751, 2SK2356++
2 SK 1703 S	Mit	MOS-N-FET-e	=2SK1703:	30p	(TO-220MF)		2SK2356Z
2 SK 1704	Mit	MOS-N-FET-e	=2SK1703: Iso, 35W	17c	SOT-186		2SK1232, 2SK1351, 2SK1608, 2SK1627, ++
2 SK 1705	Mit	MOS-N-FET	500V, 8A	17p	TO-220		-
2 SK 1706	Mit	MOS-N-FET	500V, 8A	17c(p)	TO-220		-
2 SK 1707	Mit	MOS-N-FET	600V, 4A	17p	TO-220		-
2 SK 1708	Mit	MOS-N-FET	600V, 4A	17c(p)	TO-220		-
2 SK 1709	Mit	MOS-N-FET	600V, 6A	17p	TO-220		-
2 SK 1710	Mit	MOS-N-FET	600V, 6A	17c(p)	TO-220		-
2 SK 1716	Tos	MOS-N-FET-e*	VFET, LogL, 60/20V, 2/6A, 20W, <0.37Ω(1A), 60/135ns	-15c			BUK 541-100, 2SK1255
2 SK 1717	Tos	MOS-N-FET-e*	=2SK1716: SMD	39b	SOT-89		2SK1311
2 SK 1718	Tos	MOS-N-FET-e*	VFET, LogL, 60/20V, 6A, 25W, <0.11Ω(3A), 60/300ns	-15c			BUK541-60, BUK542-100, 2SK1255, 2SK1260
2 SK 1719	Tos	MOS-N-FET-e*	VFET, LogL, 60/20V, 5/20A, 20W, on<0.11Ω(2.5A)	30p	TO-251/252		2SK1112, 2SK1804, 2SK1949
2 SK 1720	Tos	MOS-N-FET-e	VFET, 60/20V, 45/180A, 100W, <0.03Ω(25A), 60/190ns	30p	(TO-220MF)		2SK1792
2 SK 1721	Tos	MOS-N-FET-e	VFET, 500/30V, 3/12A, 40W, on<3Ω(1A), 30/80ns	30p	(TO-220MF)		2SK1314, 2SK1541, 2SK2066, 2SK2181, ++
2 SK 1722	Tos	MOS-N-FET-e	VFET, 500/30V, 5/20A, 60W, on<1.5Ω(2.5A), 30/40ns	30p	(TO-220MF)		2SK1316, 2SK2067, 2SK2184
2 SK 1723	Tos	MOS-N-FET-e	VFET, 600/30V, 12/48A, 150W, <0.65Ω(6A), 55/120ns	18p	TO-3P		2SK1968
2 SK 1724	Say	MOS-N-FET-e*	=2SK1725: SMD	39b	SOT-89		2SK1485, 2SK1726, 2SK2111
2 SK 1725	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 1/4A, 2W, <0.75Ω(0.5A), 15/50ns	9c	(NMP)		2SK1272, 2SK1274, 2SK1727, 2SK1733
2 SK 1726	Say	MOS-N-FET-e*	=2SK1727: SMD, 1A	9c	SOT-89		2SK1485, 2SK1728, 2SK2111
2 SK 1727	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 0.8/3.2A, 1W, on<1.2Ω(0.4A)	39b	(NMP)		2SK1272, 2SK1274, 2SK1729, 2SK1733
2 SK 1728	Say	MOS-N-FET-e*	=2SK1729: SMD, 1A	39b	SOT-89		2SK1334, 2SKJ1485, 2SK2112
2 SK 1729	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 0.5/2A, 1W, on<3.5Ω(0.25A)	9c	(NMP)		2SK2070, 2SK2085
2 SK 1730	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 1.8/4.2A, 1W, on<0.3Ω(1A)	9c	(NMP)		2SK1470, 2SK1717, 2SK1733, 2SK2315
2 SK 1731	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 3/12A, <0.14Ω(1.5A), 28/155ns	-12b	(FLP)		2SK1735, 2SK1738
2 SK 1732	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 4.5/18A, <65mΩ(2.5A), 48/260ns	-12b	(FLP)		2SK1735
2 SK 1733	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 1.5/6A, 1W, on<0.45Ω(0.75A)	9c	(NMP)		2SK1736
2 SK 1734	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 2.5/10A, <0.22Ω(1.5A), 25/125ns	-12b	(FLP)		2SK1738
2 SK 1735	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 4/16A, on<0.09Ω(2A), 38/210ns	-12b	(FLP)		-
2 SK 1736	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 1/4A, on<0.95Ω(0.5A), 16/85ns	9c	(NMP)		2SK2070, 2SK2085
2 SK 1737	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 1.8/7.2A, <0.4Ω(1A), 22/110ns	-12b	(FLP)		-
2 SK 1738	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 3/12A, <0.17Ω(1.5A), 31/165ns	-12b	(FLP)		-

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International	
2 SK 1740	Say	N-FET	SMD, Uni, 40V, 75mA, Idss=40...75mA, Up=2...5V	35e	SOT-23	-	-	
2 SK 1741	Say	MOS-N-FET-e	VFET, 100/20V, 10/40A, 40W, on<0.16 $\Omega$ (6A), 50/140ns	30p	(TO-220MF)	-	2SK1620, 2SK1636, 2SK1907	
2 SK 1745	Tos	MOS-N-FET-e	VFET, 500/30V, 18/72A, 150W, <0.36 $\Omega$ (9A), 120/210ns	18p	TO-3P	-	2SK870, 2SK1170, 2SK1498, 2SK1500, ++	
2 SK 1746	Tos	MOS-N-FET-e	VFET, 600/30V, 2/8A, 40W, on<4 $\Omega$ (1A), 23/80ns	30p	(TO-220MF)	-	2SK1624, 2SK1980	
2 SK 1747	Say	N-FET	Dual, Uni, 40V, Idss=40...75mA, Up=2...5V, =2x2SK937	-	-	-	-	
2 SK 1748(Z)	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, $\pm$ 8/24A, 20W, on<0.11 $\Omega$ (4A) 75/145ns	30p	TO-251 Z: TO-252	-	2SK1472	
2 SK 1749	Say	MOS-N-FET-e	VFET, 60/20V, $\pm$ 50/200A, 150W, <25m $\Omega$ (25A)	18p	TO-3P	-	BUK539-60, 2SK1258, 2SK1379, 2SK2121	
2 SK 1750	Nec	MOS-N-FET-e*	VFET, 450/30V, $\pm$ 5/20A, 50W, on<1.4 $\Omega$ (2.5A), 40/70ns	17p	TO-220	-	2SK1156, 2SK1246, 2SK1751, 2SK2355...56	
2 SK 1751	Nec	MOS-N-FET-e*	=2SK1750: 500/30V, on<1.5 $\Omega$ (2.5A)	17p	TO-220	-	2SK1156, 2SK1246, 2SK1751, 2SK2356	
2 SK 1750Z...1751Z	Nec	MOS-N-FET-e*	=2SK1750...51:	30p	(TO-220MF)	-	2SK2355Z...56Z	
2 SK 1752	Nec	MOS-N-FET-e*	VFET, 450/30V, $\pm$ 10/30A, 100W, on<0.9 $\Omega$ (5A), 80/90ns	18p	TO-3P	-	2SK724, 2SK1488, 2SK1516, 2SK1785, ++	
2 SK 1753	Nec	MOS-N-FET-e*	=2SK1752: 500/30V, on<1 $\Omega$ (5A)	18p	TO-3P	-	2SK724, 2SK1488, 2SK1516, 2SK1785, ++	
2 SK 1754	Mit	MOS-N-FET-e	VFET, LogL, 50/20V, 10A, 45W, <0.09 $\Omega$ (5A), 55/200ns	30p	TO-252	-	2SK2018, 2SK2329	
2 SK 1756	Nec	MOS-N-FET-e*	VFET, 450/30V, $\pm$ 15/60A, 120W, <0.5 $\Omega$ (8A), 80/120ns	18p	TO-3P	-	2SK1610, 2SK1678, 2SK1745, 2SK1757	
2 SK 1757	Nec	MOS-N-FET-e*	=2SK1756: 500/30V, on<0.6 $\Omega$ (8A)	18p	TO-3P	-	2SK1610, 2SK1678, 2SK1745, 2SK2257	
2 SK 1758	Nec	MOS-N-FET-e*	VFET, 600/30V, $\pm$ 2/8A, 30W, on<4.2 $\Omega$ (1A), 11/80ns	17c	TO-220 Iso	-	BUK 445-600, 2SK1142, 2SK1834, 2SK1953	
2 SK 1760	Nec	MOS-N-FET-e*	VFET, 900/30V, $\pm$ 5/10A, 100W, on<4 $\Omega$ (3A)	18p	TO-3P	2SK727	18p	2SK1341, 2SK1461, 2SK1649...50, 2SK1794++
2 SK 1761	Hit	MOS-N-FET-e*	VFET, 250/30V, 12/48A, 75W, on<0.35 $\Omega$ (6A), 85/144ns	17p	TO-220	-	2SK2133	
2 SK 1762	Hit	MOS-N-FET-e*	=2SK1761: Iso, 35W	17c	SOT-186	-	2SK2012	
2 SK 1763(LS)	Hit	MOS-N-FET-e*	VFET, LogL, 30/20V, 2.5/10A, 10W, on<0.35 $\Omega$ (1.5A)	30p	TO-251/252	-	2SK974, 2SK1282	
2 SK 1764	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, 2/4A, <0.45 $\Omega$ (1A), 18/80ns	39b	SOT-89	-	2SK1311, 2SK1717	
2 SK 1766	Tos	MOS-N-FET-e	VFET, 250/30V, 10A, 40W, on<0.6 $\Omega$ (5A), 70/100ns	17c	TO-220 Iso	-	2SK1036, 2SK1762, 2SK2011, 2SK2426	
2 SK 1767	Hit	MOS-N-FET-e	VFET, 600/30V, 3.5/14A, 40W, <2.5 $\Omega$ (2.5A), 60/120ns	17c	TO-220 Iso	(IRFBC 40) <sup>3</sup>	17p	2SK1572, 2SK2044, 2SK2144
2 SK 1768	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 12/48A, 15W, <0.07 $\Omega$ (8A), 25/220ns	=30c	(I Type)	-	-	
2 SK 1769	Tos	MOS-N-FET-e	VFET, 600/30V, 2/8A, 15W, on<4 $\Omega$ (1A), 23/80ns	=30c	(I Type)	-	-	
2 SK 1770	Hit	MOS-N-FET-e	=2SK1205: Iso, 60W	=18c	(TO-3PFM)	-	-	
2 SK 1771	Tos	MOS-N-FET-e	SMD, VFET, FM/VHF, 12.5V, 30mA, F=1/Gp=23dB(100MHz)	44(SD-G)	SOT-143	-	-	
2 SK 1772	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 30/20V, 1/2A, <0.6 $\Omega$ (0.5A), 25/70ns	39b	SOT-89	-	2SK1726, 2SK1728	
2 SK 1773	Hit	MOS-N-FET-e*	VFET, 1000/30V, 5/15A, 100W, on<2 $\Omega$ (3A), 135/345ns	18p	TO-3P	-	BUZ 357...358, 2SK1120, 2SK1205, 2SK1359	
2 SK 1774	Hit	MOS-N-FET-e	=2SK684: Iso, 60W	=18c	(TO-3PFM)	-	2SK1464, 2SK1685	
2 SK 1775	Hit	MOS-N-FET-e*	=2SK1342: Iso, 60W	=18c	(TO-3PFM)	-	2SK1464, 2SK1685...86	
2 SK 1776	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 10/40A, 20W, on<0.15 $\Omega$ (5A) 650/1700ns, int. Rgate=1.5k $\Omega$	17c	SOT-186	-	-	
2 SK 1777	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 15/60A, 25W, on<65m $\Omega$ (8A) 890/4700ns, int. Rgate=850 $\Omega$	17c	SOT-186	-	-	
2 SK 1778	Hit	MOS-N-FET-e*	VFET, LogL, 80/20V, 10/40A, 25W, on<65m $\Omega$ (8A) 410/3350ns, int. Rgate=880 $\Omega$	17c	SOT-186	-	-	
2 SK 1784	Nec	MOS-N-FET-e*	VFET, 450/30V, $\pm$ 12/48A, 100W, <0.6 $\Omega$ (6A), 70/115ns	18p	TO-3P	-	2SK1488, 2SK1723, 2SK1745, 2SK1757, ++	
2 SK 1785	Nec	MOS-N-FET-e*	=2SK1784: 500/30V, on<0.7 $\Omega$ (6A)	18p	TO-3P	-	2SK1488, 2SK1723, 2SK1745, 2SK1757, ++	
2 SK 1792	Tos	MOS-N-FET-e*	VFET, LogL, 60/20V, 45/180A, 100W, on<0.02 $\Omega$ (20A)	30p	(TO-220MF)	-	2SK2376	
2 SK 1793	Nec	MOS-N-FET-e*	VFET, 900/30V, $\pm$ 3/6A, 75W, on<7.5 $\Omega$ (2A), 25/50ns	17p	TO-220	-	BUK 456-1000, 2SK1456, 2SK1601, 2SK1638+	
2 SK 1793 Z	Nec	MOS-N-FET-e*	=2SK1793:	30p	(TO-220MF)	-	2SK1510, 2SK1659	
2 SK 1794	Nec	MOS-N-FET-e*	VFET, 900/30V, $\pm$ 6/12A, 100W, on<2.8 $\Omega$ (3A), 50/105ns	18p	TO-3P	-	2SK1358, 2SK1614, 2SK1502, 2SK1692, ++	
2 SK 1795	Nec	MOS-N-FET-e*	VFET, 900/30V, $\pm$ 8/16A, 140W, on<1.6 $\Omega$ (4A), 70/185ns	18p	TO-3P	-	2SK1358, 2SK1614, 2SK1502, 2SK1692, ++	
2 SK 1796	Nec	MOS-N-FET-e*	VFET, 900/30V, $\pm$ 10/20A, 150W, <1.2 $\Omega$ (5A), 90/230ns	18p	TO-3P	-	2SK1933	
2 SK 1803	Mat	MOS-N-FET-e	VFET, 900/30V, 8/16A, 100W, on<1.7 $\Omega$ (4A), 100/330ns	18c(p)	(TOP-3F)	-	2SK1358, 2SK1614, 2SK1502, 2SK1692, ++	
2 SK 1804	Tos	MOS-N-FET-e*	VFET, LogL, 100/20V, 5/20A, 20W, on<0.28 $\Omega$ (2.5A)	30c	TO-251, 252	-	2SK1474	
2 SK 1805	Tos	MOS-N-FET-e	VFET, 500/30V, 7/28A, 45W, on<0.85 $\Omega$ (4A)	17c	TO-220 Iso	-	2SK1352, 2SK1567, 2SK1609	
2 SK 1806	Say	N-FET	Uni, S, 30V, Idss=0.6...6mA, Up=0.2...2.5V	-	-	-	-	
2 SK 1807	Tos	MOS-N-FET-e*	VFET, 900/30V, 4/10A, 60W, on<4 $\Omega$ (2A), 75/180ns	17p	TO-220	-	2SK1639, 2SK1643, 2SK1501	
2 SK 1808	Tos	MOS-N-FET-e*	=2SK1807: Iso, 35W	17c	SOT-186	-	2SK1985	
2 SK 1809	Hit	MOS-N-FET-e*	=2SK1404: 60W	17p	TO-220	-	2SK1117, 2SK1402	
2 SK 1810	Shi	MOS-N-FET-e	VFET, 300/30V, 10A, 50W, on<0.7 $\Omega$ , 75/100ns	16p	(MTO-3P)	-	BUZ 325...326, 2SK634	
2 SK 1811	Shi	MOS-N-FET-e	VFET, 300/30V, 20A, 100W, on<0.35 $\Omega$ , 140/160ns	16p	(MTO-3P)	-	BUZ 323, 2SK1401	
2 SK 1812	Shi	MOS-N-FET-e	VFET, 300/30V, 30A, 120W, on<0.23 $\Omega$ , 190/240ns	16p	(MTO-3P)	-	2SK868, 2SK1674	
2 SK 1813	Say	MOS-N-FET-e	VFET, 100/20V, 30A, 70W, on<0.55 $\Omega$ (20A), 120/450ns	30p	(TO-220MF)	-	-	
2 SK 1814	Fjd	MOS-N-FET-e	VFET, 60/20V, 20A, 45W, <70m $\Omega$ (10A), 50/200ns	17p	TO-220	-	2SK1115, 2SK1296, 2SK1417, 2SK1910	
2 SK 1815	Fjd	MOS-N-FET-e	VFET, 60/20V, 35A, 50W, <35m $\Omega$ (17.5A), 66/500ns	18c	TO-3P Iso	-	2SK1424, 2SK1435...36, 2SK1666, 2SK2203	
2 SK 1816	Fjd	MOS-N-FET-e	100V, 5A, 20W	-	-	-	-	
2 SK 1817	Fjd	MOS-N-FET-e	VFET, 100/20V, 20A, 40W, <80m $\Omega$ (10A), 55/450ns	17c	TO-220 Iso	-	2SK1292, 2SK1307, 2SK1348...49, 2SK1906	
2 SK 1818	Fjd	MOS-N-FET-e	VFET, 250/20V, 20A, 50W, <0.25 $\Omega$ (10A), 80/300ns	17c	TO-220 Iso	-	-	
2 SK 1819	Fjd	MOS-N-FET-e	VFET, 450/25V, 5A, 35W, on<1.5 $\Omega$ (2.5A), 55/160ns	17c	TO-220 Iso	-	2SK1231...32, 2SK1608, 2SK2114...15, ++	
2 SK 1820(LS)	Fjd	MOS-N-FET-e	VFET, 500/30V, 6A, 80W, on<1.6 $\Omega$ (3A), 70/130ns	30p	(TO-220MF)	-	2SK2356Z	
2 SK 1821	Fjd	MOS-N-FET-e	VFET, 600/30V, 2A, 30W, on<6.5 $\Omega$ (1A), 16/45ns	17c	TO-220 Iso	-	BUK 445-600, 2SK1758, 2SK1953, 2SK2043	
2 SK 1822	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 20A, 35W, <0.07 $\Omega$ (10A), 37/170ns	17c	TO-220 Iso	-	2SK1214, 2SK1290, 2SK1345...46, 2SK1897	
2 SK 1823	Fjd	MOS-N-FET-e	V-MOS, LogL, 60/20V, 50A, 80W, <17m $\Omega$ (25A), 230/940ns	18c	TO-3P Iso	-	2SK1298, 2SK1653, 2SK1666, 2SK2203	
2 SK 1824	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 30/7V, $\pm$ 0.1/0.2A, <8 $\Omega$ (10mA)	35a(1.6mm)	SS Mini	-	-	
2 SK 1825	Tos	MOS-N-FET-e*	V-MOS, 50/10V, 0.05A, 0.3W, <50 $\Omega$ (10mA), 110/150ns int. Diode(S $\rightarrow$ G)	41c	-	-	-	
2 SK 1826	Tos	MOS-N-FET-e*	=2SK1825: SMD	{2SJ342 2SJ343	35a	SOT-23	-	
2 SK 1827	Tos	MOS-N-FET-e*	=2SK1825: SMD	{2SJ344	35a(2mm)	SOT-323	-	
2 SK 1828	Tos	MOS-N-FET-e*	V-MOS, LogL, 20/10V, 0.05A, <40 $\Omega$ (10mA), 140/140ns int. Diode(S $\rightarrow$ G)	{2SJ345 2SJ346	35a	SOT-23	2SK2033	
2 SK 1829	Tos	MOS-N-FET-e*	=2SK1828:	{2SJ346	35a(2mm)	SOT-323	2SK3034	
2 SK 1830	Tos	MOS-N-FET-e*	=2SK1828:	{2SJ347	35a(1.6mm)	SS Mini	2SK2035	
2 SK 1831	Hit	MOS-N-FET-e*	=2SK1161: Iso, 50W	=18c	(TO-3PFM)	-	2SK1225, 2SK1206, 2SK1328...29, 2SK1696++	
2 SK 1832	Hit	MOS-N-FET-e*	=2SK1162: Iso, 50W	=18c	(TO-3PFM)	-	2SK1206, 2SK1329, 2SK1523, 2SK1696	
2 SK 1833	Mat	MOS-N-FET-e	VFET, 500/30V, 2.5/6A, 40W, on<4 $\Omega$ (1.5A), 40/85ns	17c	SOT-186	-	BUK 444-500, 2SK1758	
2 SK 1834	Mat	MOS-N-FET-e	VFET, 800/30V, 2/4A, 40W, on<7 $\Omega$ (1A), 35/85ns	17c	SOT-186	-	BUK 446-800, 2SK1142, 2SK1459, 2SK1611++	
2 SK 1835	Hit	MOS-N-FET-e	VFET, 1500/20V, 4/10A, 125W, on<7 $\Omega$ (2A), 105/310ns	18p	TO-3P	-	-	
2 SK 1836	Hit	MOS-N-FET-e*	VFET, 450/30V, 50/200A, 250W, <0.1 $\Omega$ (25A), 330/770ns	77p	TOP-3L	-	2SK1521...22	
2 SK 1837	Hit	MOS-N-FET-e*	=2SK1836: 500/30V, on<0.11 $\Omega$ (25A)	77p	TOP-3L	-	2SK1522	
2 SK 1838(LS)	Hit	MOS-N-FET-e*	VFET, 250/30V, 1/2A, 10W, on<8 $\Omega$ (0.5A), 11/14.5ns	30p	TO-251/252	-	2SK945, 2SK1195	
2 SK 1839	Say	MOS-N-FET-e	=2SK1841: SMD	35d(2mm)	SOT-323	-	-	
2 SK 1840	Say	MOS-N-FET-e	=2SK1841: SMD	35f	SOT-23	-	-	
2 SK 1841	Say	MOS-N-FET-e	VFET, LogL, 30/12V, 0.1A, 0.2W, <25 $\Omega$ (10mA)	40f	(SPA)	-	2SK1590	
2 SK 1842	Mat	N-FET	SMD, Sensor, 40V, Idss=30...200 $\mu$ A, Up=1.3<3V	35f	SOT-23	-	2SK1398	
2 SK 1846	Mat	MOS-N-FET-e	VFET, 800/30V, 3/6A, 40W, on<4 $\Omega$ (2A), 40/140ns	30c	(TO-220MF)	-	2SK1528, 2SK2005	
2 SK 1847	Say	MOS-N-FET-e	SMD, VFET, LogL, 30/15V, 0.5A, <0.75 $\Omega$ (250mA), 15/55ns	35a	SOT-23	-	-	
2 SK 1848	Say	MOS-N-FET-e	SMD, VFET, LogL, 60/15V, 0.4A, <1.2 $\Omega$ (0.2A), 15/60ns	35a	SOT-23	-	-	
2 SK 1849	Say	MOS-N-FET-e	SMD, VFET, LogL, 100/15V, 0.25A, <3.5 $\Omega$ (0.15A), 15/75ns	35a	SOT-23	-	-	
2 SK 1850	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, $\pm$ 10/40A, 1.8W, <0.07 $\Omega$ (5A)	78c	(MP-10)	-	-	



Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 1851	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, ±15/60A, 1.8W, <45mΩ(8A)	78c	(MP-10)	-	-
2 SK 1852	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, ±10/40A, 1.8W, <0.15Ω(5A)	78c	(MP-10)	-	-
2 SK 1853	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, ±15/60A, 1.8W, <0.08Ω(8A)	78c	(MP-10)	-	-
2 SK 1854	Tos	MOS-N-FET-e	VFET, DC-DC, 400/30V, 6A, 40W, <1.2Ω(2.5A), 50/100ns	17c	TO-220 Iso	-	2SK1231, 2SK1351, 2SK1608, 2SK1627,++
2 SK 1855	Tos	MOS-N-FET-e	VFET, 500/30V, 12/48A, 125W, on<0.7Ω(6A), 90/140ns	18p	TO-3P	-	2SK1488, 2SK1753, 2SK1745, 2SK1785,++
2 SK 1858	Tos	MOS-N-FET-e	VFET, 800/30V, 3A, 60W, on<5Ω(1.5A), 40/150ns	30p	(TO-220MF)	-	2SK1510, 2SK1528, 2SK1659
2 SK 1859	Hit	MOS-N-FET-e*	=2SK1341: Iso, 60W	-18c	(TO-3PFM)	-	2SK1464, 2SK1684...85, 2SK1775
2 SK 1861	Shi	MOS-N-FET-e	VFET, 150/20, 4A, 10W, on<0.6Ω, 57/121ns	30p	TO-251/252	-	-
2 SK 1862	Hit	MOS-N-FET-e*	=2SK1153: Iso, 25W	17c	SOT-186	-	BUK 445-450...500, 2SK1572, 2SK1767,++
2 SK 1863	Hit	MOS-N-FET-e*	=2SK1154: Iso, 25W	17c	SOT-186	-	BUK 445-500, 2SK1572, 2SK1767,++
2 SK 1864	Tos	MOS-N-FET-e	VFET, 500/30V, 8A, 100W, on<0.85Ω(4A), 60/115ns	30p	(TO-220MF)	-	2SK1316, 2SK1541, 2SK2187
2 SK 1865	Tos	MOS-N-FET-e	VFET, 500/30V, 12A, 100W, on<0.7Ω(6A), 90/140ns	30p	(TO-220MF)	-	2SK2366Z
2 SK 1867	Mat	MOS-N-FET-e	VFET, 900/30V, 2/6A, 15W, on<4.85Ω(2A), 40/140ns	78c	(MT-4)	-	(2SK1143, 2SK1275, 2SK1459)†
2 SK 1868	Mat	MOS-N-FET-e	VFET, LogL, 60/20V, 3/5A, 15W, on<0.2Ω(3A), 29/150ns	78c	(MT-4)	-	(BUK 541-60, 2SK1255)†
2 SK 1869(L,S)(A)	Hit	MOS-N-FET-e*	=2SK1400: 50W	30p	(TO-220MF)	-	-
2 SK 1871	Say	MOS-N-FET-e	VFET, 15/60A, 40W, on<0.08Ω	30p	(TO-220MF)	-	-
2 SK 1875	Tos	MOS-N-FET-e	=2SK709: SMD	35f(2mm)	SOT-323	-	-
2 SK 1876	Fjd	MOS-N-FET-e	VFET, 450V, 10A, 80W	-	-	-	-
2 SK 1877	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 10/40A, 12W, on<75mΩ(5A)	14b	-TO-126	-	-
2 SK 1878	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 10/40A, 12W, on<0.14Ω(5A)	14b	-TO-126	-	-
2 SK 1879	Tos	MOS-N-FET-e	VFET, 60/20V, 45A, 125W, on<30mΩ(25A), 35/120ns	18p	TO-3P	-	BUK 439-60, 2SK1665, 2SK1514, 2SK2096,++
2 SK 1880(L,S)	Hit	MOS-N-FET-e*	VFET, 600/30V, 1.5/3A, 20W, <8Ω(1A), 35/65ns	30p	TO-251/252	-	(2SK1327)†
2 SK 1881(L,S)	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 20A, 45W, on<0.07Ω(10A), 50/200ns	30p	(TO-220MF)	-	2SK1622, 2SK1918
2 SK 1882	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 25A, 40W, on<0.05Ω(12A)	17c	TO-220 Iso	-	2SK1095, 2SK1214, 2SK1345, 2SK1897
2 SK 1883	Say	MOS-N-FET-e	VFET, LogL, 30/15V, 18/72A, 50W, on<0.055Ω	17p	TO-220	-	2SK972, 2SK1115, 2SK1287, 2SK1910
2 SK 1884	Say	MOS-N-FET-e	VFET, LogL, 30/20V, 22/88A, 60W, on<0.04Ω	17p	TO-220	-	2SK972, 2SK1115, 2SK1287, 2SK1910
2 SK 1885	Say	MOS-N-FET-e	VFET, LogL, 30/15V, 35/140A, 70W, on<0.025Ω	17p	TO-220	-	2SK1291, 2SK1296, 2SK2411
2 SK 1886	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 15/60A, 25W, on<55mΩ(9A)	17c	TO-220 Iso	-	2SK1094, 2SK1286
2 SK 1887	Say	MOS-N-FET-e*	VFET, LogL, 30/20V, 20/80A, 25W, on<40mΩ(11A)	17c	TO-220 Iso	-	2SK1345, 2SK1348...49, 2SK1882, 2SK1897
2 SK 1888	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 30/120A, 30W, on<25mΩ(18A)	17c	TO-220 Iso	-	2SK1345, 2SK1348...49, 2SK1882, 2SK1897
2 SK 1889	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 18/72A, 50W, on<55mΩ(9A)	30p	(TO-220MF)	-	2SK1648, 2SK1898, 2SK2322
2 SK 1890	Say	MOS-N-FET-e*	VFET, LogL, 30/20V, 22/88A, 60W, on<40mΩ(11A)	30p	(TO-220MF)	-	2SK1622, 2SK1918
2 SK 1891	Say	MOS-N-FET-e*	VFET, LogL, 30/15V, 35/140A, 70W, on<25mΩ(18A)	30p	(TO-220MF)	-	2SK1900
2 SK 1892	Say	MOS-N-FET-e	VFET, LogL, 60/15V, 15/60A, <80mΩ	17p	TO-220	-	BUK 552-60, 2SK1115, 2SK1347, 2SK1910,++
2 SK 1893	Say	MOS-N-FET-e	VFET, LogL, 60/20V, 18/72A, <70mΩ	17p	TO-220	-	BUK 552-60, 2SK1115, 2SK1347, 2SK1910,++
2 SK 1894	Say	MOS-N-FET-e	VFET, LogL, 60/15V, 30/120A, <40mΩ	17p	TO-220	-	2SK1291, 2SK1296, 2SK2411
2 SK 1895	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 12/48A, 25W, on<80mΩ(8A)	17c	TO-220 Iso	-	2SK1093, 2SK1256, 2SK1305...06, 2SK1344++
2 SK 1896	Say	MOS-N-FET-e*	VFET, LogL, 60/20V, 15/60A, 25W, on<70mΩ(9A)	17c	TO-220 Iso	-	2SK1094, 2SK1214, 2SK1286, 2SK1345
2 SK 1897	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 25/100A, 30W, on<0.04Ω(15A)	17c	TO-220 Iso	-	2SK1095, 2SK1214, 2SK1345, 2SK1882
2 SK 1898	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 15/60A, 50W, on<80mΩ(8A)	30p	(TO-220MF)	-	2SK1648, 2SK2322
2 SK 1899	Say	MOS-N-FET-e*	VFET, LogL, 60/20V, 18/72A, 60W, on<70mΩ(9A)	30p	(TO-220MF)	-	2SK1622, 2SK1918
2 SK 1900	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 30/120A, 70W, on<40mΩ(15A)	30p	(TO-220MF)	-	2SK1813, 2SK2411Z
2 SK 1901	Say	MOS-N-FET-e	VFET, LogL, 100/15V, 12/48A, 50W, on<0.16Ω	17p	TO-220	-	2SK1300...01, 2SK1559, 2SK1561
2 SK 1902	Say	MOS-N-FET-e	VFET, LogL, 100/20V, 15/60A, 60W, on<135mΩ	17p	TO-220	-	2SK1301, 2SK1559, 2SK1561
2 SK 1903	Say	MOS-N-FET-e	VFET, LogL, 100/15V, 25/100A, 70W, on<80mΩ	17p	TO-220	-	2SK1116, 2SK1293, 2SK1302, 2SK1347
2 SK 1904	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 10/40A, 25W, <0.16Ω(6A)	17c	TO-220 Iso	-	BUK 545-100, 2SK1305, 2SK1035
2 SK 1905	Say	MOS-N-FET-e*	VFET, LogL, 100/20V, 12/48A, 25W, <1356Ω(7A)	17c	TO-220 Iso	-	2SK1034, 2SK1288, 2SK1306, 2SK2131
2 SK 1906	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 20/80A, 30W, <0.08Ω(12A)	17c	TO-220 Iso	-	2SK1292, 2SK1307, 2SK1348...49
2 SK 1907	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 12/48A, 50W, <0.16Ω(6A)	30p	(TO-220MF)	-	2SK1623
2 SK 1908	Say	MOS-N-FET-e*	VFET, LogL, 100/20V, 15/60A, 60W, on<135mΩ(7A)	30p	(TO-220MF)	-	2SK1623, 2SK1813
2 SK 1909	Say	MOS-N-FET-e*	VFET, LogL, 100/15V, 25/100A, 70W, on<80mΩ(12A)	30p	(TO-220MF)	-	2SK1813
2 SK 1910	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 25/100A, 50W, on<0.04Ω(15A)	17p	TO-220	-	2SK942, 2SK972, 2SK1115, 2SK1287
2 SK 1911	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 40/160A, 75W, on<22mΩ(20A)	17p	TO-220	-	2SK1542
2 SK 1913	Tos	MOS-N-FET-e	VFET, 600/30V, 4A, 40W, on<1.8Ω(2.5A), 40/130ns	17c	TO-220 Iso	-	2SK1118, 2SK1637, 2SK2045, 2SK2097
2 SK 1915	Tos	MOS-N-FET-e	VFET, 600/30V, 6A, 100W, on<1.25Ω(3A), 40/85ns	30p	(TO-220MF)	-	-
2 SK 1916	Fjd	MOS-N-FET-e	VFET, 450/30V, 18A, 80W, on<0.45Ω(8A), 170/330ns	18c	TO-3P Iso	-	2SK1406, 2SK1453, 2SK1525
2 SK 1917 M	Fjd	MOS-N-FET-e	VFET, 250/30V, 10A, 50W, on<0.4Ω(5A), 60/150ns	17c	TO-220 Iso	-	2SK1036, 2SK1762, 2SK2011, 2SK2426
2 SK 1918(L,S)	Hit	MOS-N-FET-e*	=2SK1910:	30p	(TO-220MF)	-	2SK1622, 2SK2311
2 SK 1919(L,S)	Hit	MOS-N-FET-e*	=2SK1911:	30p	(TO-220MF)	-	2SK1792, 2SK2164, 2SK2266
2 SK 1920	Say	MOS-N-FET-e*	VFET, 250/30V, 4/16A, 30W, on<0.7Ω(2A), 27/120ns	30c	TO-251/252	-	2SK2099
2 SK 1921	Say	MOS-N-FET-e*	VFET, 250/30V, 4/16A, 50W, on<0.7Ω(2A), 27/120ns	17p	TO-220	-	IRF 624, 2SK924, 2SK1391
2 SK 1922	Say	MOS-N-FET-e*	VFET, 600/30V, 2/8A, 50W, on<4.3Ω(1A), 22/105ns	17p	TO-220	-	BUZ 80, 2SK858, 2SK1323...24
2 SK 1923	Say	MOS-N-FET-e	VFET, 600/30V, 4/16A, 60W, <1.8Ω(2A), 28/200ns	17p	TO-220	IRFBC 40	2SK1402, 2SK1501, 2SK1639, 2SK1643
2 SK 1924	Say	MOS-N-FET-e	VFET, 600/30V, 6/24A, 70W, <1.5Ω(3A), 43/300ns	17p	TO-220	IRFBC 40	2SK1117, 2SK1643, 2SK1809
2 SK 1925	Say	MOS-N-FET-e	VFET, 600/30V, 8/32A, 120W, <1.2Ω(4A), 45/450ns	18p	TO-3P	-	BUK 638-800, BUZ 332A, 2SK1032
2 SK 1927	Tos	MOS-N-FET-e	VFET, 100/30V, 15A, 60W, on<0.18Ω(8A), 50/40ns	30p	(TO-220MF)	-	2SK1623, 2SK1909
2 SK 1928	Tos	MOS-N-FET-e	VFET, 100/30V, 27A, 80W, on<85mΩ(15A), 45/55ns	30p	(TO-220MF)	-	2SK1813
2 SK 1929	Tos	MOS-N-FET-e	VFET, 900/30V, 5A, 100W, on<2.8Ω(2A), 30/70ns	30p	(TO-220MF)	-	2SK1528, 2SK2006
2 SK 1930	Tos	MOS-N-FET-e	VFET, 1000/20V, 4A, 80W, on<3.8Ω(2A), 30/70ns	30p	(TO-220MF)	-	-
2 SK 1931	Shi	MOS-N-FET-e	VFET, 200/30V, 5A, 20W, on<0.65Ω, 55/75ns	30p	TO-251/252	-	2SK1920
2 SK 1933	Hit	MOS-N-FET-e*	VFET, 900/30V, 10/30A, 150W, on<1.2Ω(5A), 170/455ns	18p	TO-3P	-	2SK1796
2 SK 1934	Hit	MOS-N-FET-e*	VFET, 1000/30V, 8/24A, 150W, on<1.6Ω(4A), 170/505ns	18p	TO-3P	-	2SK1120
2 SK 1936-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 10A, 100W, <0.76Ω(5A), 55/130ns	18p	TO-3P	-	2SK1488, 2SK1516, 2SK1753, 2SK1785, ++
2 SK 1937-01	Fjd	MOS-N-FET-e	V-FET, 500/30V, 15A, 125W, <0.48Ω(7.5A), 100/230ns	18p	TO-3P	-	2SK1610, 2SK1678, 2SK1745, 2SK1757
2 SK 1938-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 18A, 100W, <0.35Ω(9A), 115/310ns	18c	TO-3P Iso	-	2SK1406, 2SK1525
2 SK 1939-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 8A, 100W, <1.2Ω(4A), 50/140ns	18p	TO-3P	-	BUK 638-800, BUZ 332A, 2SK1032
2 SK 1940-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 12A, 125W, on<0.75Ω(6A), 90/220ns	18p	TO-3P	-	BUZ 334, 2SK1723
2 SK 1941-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 16A, 100W, <0.55Ω(8A), 105/280ns	18c	TO-3P Iso	-	2SK1405
2 SK 1942-01	Fjd	MOS-N-FET-e	VFET, 900/30V, 3A, 80W, on<4Ω(1.5A), 30/75ns	18p	TO-3P	-	2SK726...727, 2SK1341, 2SK1760, 2SK1794++
2 SK 1943-01	Fjd	MOS-N-FET-e	VFET, 900/30V, 5A, 80W, on<2.8Ω(2.5A), 50/130ns	17p	TO-220	-	2SK1501, 2SK1639, 2SK1643, 2SK1807
2 SK 1944-01	Fjd	MOS-N-FET-e	VFET, 900/30V, 5A, 100W, on<2.8Ω(2.5A), 50/130ns	18p	TO-220	-	2SK727, 2SK1341, 2SK1760, 2SK1794,++
2 SK 1945-01	Fjd	MOS-N-FET-e	VFET, 900/30V, 5A, 80W, on<2.8Ω(2.5A), 50/130ns	18c	TO-220	-	2SK1175...76, 2SK1463, 2SK1684, 2SK1859
2 SK 1946-01M	Fjd	MOS-N-FET-e	VFET, 60/20V, 45A, 45W, on<22mΩ(22.5A)	17c	TO-220 Iso	-	2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 1947	Hit	MOS-N-FET-e*	FREDFET, 250/30V, 50/200A, 200W, <60mΩ(25A)	77p	TOP-3L	-	-
2 SK 1948	Hit	MOS-N-FET-e*	VFET, 250/30V, 50/200A, 200W, <60mΩ(25A)	77p	TOP-3L	-	-
2 SK 1949(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20, 5/20A, 20W, on<0.15Ω(3A)	30p	TO-251/252	-	2SK1112, 2SK1471, 2SK1719
2 SK 1950(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20, 3/12A, 10W, on<0.25Ω(2A)	30p	TO-251/252	-	2SK974, 2SK1282, 2SK1254, 2SK1299,++
2 SK 1951	Hit	MOS-N-FET-e*	=2SK1910: Iso, 30W	17c	SOT-186	-	2SK943, 2SK1095, 2SK1345...46, 2SK1307,++
2 SK 1952	Hit	MOS-N-FET-e*	=2SK1911: Iso, 35W	17c	SOT-186	-	2SK1257, 2SK1653, 2SK2120
2 SK 1953	Nec	MOS-N-FET-e*	VFET, 600/30V, ±2/6A, 25W, on<5Ω(1A), 11/45ns	17c	TO-220 Iso	-	BUK 445-600, 2SK1142, 2SK1611, 2SK1834
2 SK 1954(Z)	Nec	MOS-N-FET-e	VFET, 180/20V, ±4/16A, 20W, on<0.65Ω(2A), 19/40ns	30p	TO-251	-	2SK1920
2 SK 1957	Hit	MOS-N-FET-e*	VFET, 200/20, 7/28A, 30W, on<0.45Ω(4A), 65/85ns	17c	SOT-186	-	BUK 545-200, 2SK1568...69, 2SK1668

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 1958	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 16/7V, ±0.1A, <12Ω(10mA), 85/210ns	35a(2mm)	SOT-323		-
2 SK 1959	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 16/7V, ±2/4A, <0.5Ω(1A), 235/390ns	39b	SOT-89		2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 1960	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 16/7V, ±3/6A, <0.2Ω(1.5A)	39b	SOT-89		2SK2054
2 SK 1961	Say	N-FET	UHF, 15V, Idss=40...75mA, Up=1.2...4.5V	7a	TO-92		-
2 SK 1962	Mat	GaAs-N-FET	UHF, 4V, 60mA, Idss=12...60mA, Up<2V, F=0.6dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1963	Mat	GaAs-N-FET	UHF, 4V, 60mA, Idss=12...60mA, Up<2V, F=0.5dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1964	Mat	GaAs-N-FET	UHF, 4V, 60mA, Idss=12...60mA, Up<2V, F=1.2dB(12GHz)	51(SGSD)	SOT-173		-
2 SK 1967	Mat	MOS-N-FET-e*	VFET, LogL, 60/20V, 20/40A, 45W, on<0.07Ω(10A)	30c	(TO-220MF)		2SK1622, 2SK1918
2 SK 1968	Hit	MOS-N-FET-e*	VFET, 600/30V, 12/48A, 100W, on<0.88Ω(6A), 95/210ns	18p	TO-3P		BUZ 334, 2SK1723
2 SK 1969-01	Fjd	MOS-N-FET-e*	VFET, LogL, 60/20V, 50A, 125W, on<1.7mΩ(25A)	18p	TO-3P		BUK539-60, 2SK1258, 2SK1379...80, 2SK2121
2 SK 1971	Hit	MOS-N-FET-e*	VFET, 500/30V, 35/140A, 200W, <0.23Ω(18A), 220/450ns	77p	TOP-3L		2SK1520, 2SK1629
2 SK 1973(F5)	Rhm	MOS-N-FET-e	VFET, 60/20V, 2/8A, 20W, on<0.35Ω(1A), 30/60ns	30c	TO-251		2SK462, 2SK973, 2SK1763
					F5: TO-252		
2 SK 1974	Rhm	MOS-N-FET-e	VFET, 60/20V, 10A, 30W, on<0.35Ω(1A)	17c	SOT-186		BUK 442-60, 2SK1093, 2SK1256, 2SK1344
2 SK 1975	Rhm	MOS-N-FET-e	VFET, 450/20V, 10A, 80W, on<0.35Ω(1A)	16c(p)	=TO-247		2SK724, 2SK899, 2SK1488, 2SK1757, ++
2 SK 1976	Rhm	MOS-N-FET-e	VFET, 450/30V, 5/20A, 30W, on<1.4Ω(1A)	17c	SOT-186		2SK1608, 2SK1626...27, 2SK2114...15, ++
2 SK 1981-01	Fjd	MOS-N-FET-e*	VFET, 500/30V, 10A, 80W, on<0.76Ω(5A), 55/130ns	17p	TO-220		2SK1503, 2SK2366
2 SK 1982-01M	Fjd	MOS-N-FET-e	=2SK1981: Iso, 50W	17c	TO-220 Iso		2SK1351, 2SK1608, 2SK1627, 2SK1993
2 SK 1983-01	Fjd	MOS-N-FET-e*	VFET, 900/30V, 3A, 60W, on<4Ω(1.5A), 30/75ns	17p	TO-220		BUK 456-1000, 2SK1601, 2SK1638, 2SK1793
2 SK 1984-01M	Fjd	MOS-N-FET-e	=2SK1983: Iso	17c	TO-220 Iso		2SK1356, 2SK1460, 2SK1995
2 SK 1985-01M	Fjd	MOS-N-FET-e	VFET, 900/30V, 5A, 50W, on<2.8Ω(2.5A), 35/105ns	17c	TO-220 Iso		2SK1808
2 SK 1986-01	Fjd	MOS-N-FET-e	VFET, 1000/30V, 4A, 80W, on<3.6Ω(2A), 35/105ns	17p	TO-220		2SK1119
2 SK 1987	Nec	MOS-N-FET-e*	VFET, 250/30V, ±7/28A, 30W, on<0.5Ω(4A), 50/80ns	17c	TO-220 Iso		2SK1478, 2SK1568...69, 2SK1668, 2SK2425
2 SK 1988	Nec	MOS-N-FET-e*	VFET, 450/30V, ±2.5/10A, 30W, <2.8Ω(1.5A), 20/40ns	17c	TO-220 Iso		BUK 444-450, 2SK1833
2 SK 1989	Nec	MOS-N-FET-e*	=2SK1988: 500/30V, on<3Ω(1.5A)	17c	TO-220 Iso		BUK 444-500, 2SK1833
2 SK 1990	Nec	MOS-N-FET-e*	VFET, 450/30V, ±4.5/18A, 30W, <1.4Ω(2.5A), 50/90ns	17c	TO-220 Iso		2SK1351, 2SK1445, 2SK1608, 2SK1626...27++
2 SK 1991	Nec	MOS-N-FET-e*	=2SK1990: 500/30V, on<1.5Ω(2.5A)	17c	TO-220 Iso		2SK1351, 2SK1232, 2SK1608, 2SK1627, ++
2 SK 1992	Nec	MOS-N-FET-e*	VFET, 450/30V, ±6/24A, 35W, on<0.9Ω(3A), 50/90ns	17c	TO-220 Iso		2SK1566...7, 2SK1609, 2SK1805, 2SK2116...7
2 SK 1993	Nec	MOS-N-FET-e*	=2SK1992: 500/30V, <1Ω(3A)	17c	TO-220 Iso		2SK1567, 2SK1609, 2SK1805, 2SK2117, ++
2 SK 1994	Nec	MOS-N-FET-e*	VFET, 900/30V, ±2/4A, 30W, on<7.5Ω(1A), 14/60ns	17c	TO-220 Iso		2SK1143, 2SK1174, 2SK1275, 2SK1459
2 SK 1995	Nec	MOS-N-FET-e*	VFET, 900/30V, ±3/6A, 35W, on<4Ω(2A), 29/128ns	17c	TO-220 Iso		2SK1356, 2SK1460, 2SK1808
2 SK 1997	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 36A, 40W, <30mΩ(18A), 40/130ns	17c	TO-220 Iso		2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 1998	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45A, 125W, <30mΩ(20A), 40/130ns	18p	TO-3P		BUK 539-60, 2SK1297, 2SK1379, 2SK1514
2 SK 1999	Hit	MOS-N-FET-e*	VFET, Dual, VHF, 120V, 12A, P<150W(200MHz)	=			
2 SK 2002-01M	Fjd	MOS-N-FET-e	VFET, 600/30V, 3A, 30W, on<4.5Ω(1.5A), 25/50ns	17c	TO-220 Iso		2SK1572, 2SK2044, 2SK2144
2 SK 2003-01M	Fjd	MOS-N-FET-e	VFET, 600/30V, 4A, 40W, on<2.4Ω(2A), 35/60ns	17c	TO-220 Iso		2SK1118, 2SK1404, 2SK2097, 2SK2118
2 SK 2004-01L,S	Fjd	MOS-N-FET-e	VFET, 1000/30V, 4A, 80W, on<3.6Ω(2A), 35/105ns	30p	(TO-220MF)		-
2 SK 2005	Shi	MOS-N-FET-e	VFET, 900/30V, 3A, 50W, on<5Ω, 45/110ns	30c	(TO-220MF)		2SK1510, 2SK1659
2 SK 2006	Shi	MOS-N-FET-e	VFET, 900/30V, 5A, 65W, on<3Ω, 65/145ns	30c	(TO-220MF)		2SK1528
2 SK 2007	Hit	MOS-N-FET-e*	VFET, 250/30V, 20/80A, 100W, <0.15Ω(10A), 155/315ns	18p	TO-3P		2SK901, 2SK944, 2SK1641
2 SK 2008	Hit	MOS-N-FET-e*	=2SK2007: Iso, 60W	=18c	(TO-3PFM)		2SK1406, 2SK1525, 2SK1670
2 SK 2009	Tos	MOS-N-FET-e*	SMD, VFET, 30/20V, 0.2A, <2Ω(50mA), 60/120ns (2SJ305)	35a	SOT-23		2SK1849
2 SK 2010	Say	MOS-N-FET-e*	VFET, 250/30V, 4/16A, 25W, on<0.7Ω(2A), 27/120ns	17c	TO-220 Iso		2SK1668, 2SK1987, 2SK2108, 2SK2425, ++
2 SK 2011	Say	MOS-N-FET-e*	VFET, 250/30V, 12/48A, 30W, on<0.35Ω(6A), 50/235ns	17c	TO-220 Iso		2SK1036, 2SK1762, 2SK2426
2 SK 2012	Say	MOS-N-FET-e*	VFET, 250/30V, 18/72A, 40W, <0.16Ω(12A), 100/445ns	17c	TO-220 Iso		2SK2255
2 SK 2013	Tos	MOS-N-FET-e	VFET, 180/20V, 1A, 25W	17c	TO-220 Iso		2SK528...529, 2SK1443
2 SK 2014	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 1/2A, 10W, on<0.95Ω(0.5A)	30c	TO-252		-
2 SK 2015	Mat	MOS-N-FET-e	VFET, LogL, 150/20V, 3/5A, 10W, on<1.1Ω(2A)	30c	TO-252		-
2 SK 2016	Mat	MOS-N-FET-e	VFET, LogL, 100/20V, 5/10A, 10W, on<0.47Ω(3A)	30c	TO-252		2SK1474, 2SK1804
2 SK 2017	Mat	MOS-N-FET-e	VFET, 550/30V, 1/2A, 10W, on<8Ω(0.6A), 30/90ns	30c	TO-252		2SK1327, 2SK1880
2 SK 2018-01(L,S)	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 10A, 20W, <0.1Ω(5A), 30/150ns	30p	TO-251/252		2SK2329, 2SK2414
2 SK 2019-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 3.5A, 40W, on<3Ω(1.5A), 35/55ns	17p	TO-220		2SK1154, 2SK1244, 2SK1494
2 SK 2020-01M	Fjd	MOS-N-FET-e	=2SK2019: Iso, 30W	17c	TO-220 Iso		BUK 445-500, 2SK1572, 2SK1767, 2SK2144++
2 SK 2021-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 5A, 60W, on<1.6Ω(2.5A), 35/65ns	17p	TO-220		2SK1156, 2SK1246, 2SK1751, 2SK2356
2 SK 2022-01M	Fjd	MOS-N-FET-e	=2SK2021: Iso, 40W	17c	TO-220 Iso		2SK1351, 2SK1608, 2SK1627, 2SK2115
2 SK 2023-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 3A, 50W, on<4.5Ω(1.5A), 25/50ns	17p	TO-220		BUK 456-800, 2SK1600
2 SK 2024-01	Fjd	MOS-N-FET-e	=2SK2023:	18p	TO-3P		BUZ 307, BUZ 360...361, 2SK603, 2SK954
2 SK 2025-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 4A, 60W, on<2.4Ω(2A), 35/60ns	17p	TO-220		BUZ 90, 2SK1117, 2SK1402, 2SK1809, ++
2 SK 2026-01	Fjd	MOS-N-FET-e	=2SK2025:	18p	TO-3P		2SK695, 2SK793, 2SK1213, 2SK1403
2 SK 2027-01	Fjd	MOS-N-FET-e	VFET, 600/30V, 8A, 80W, on<1.2Ω(4A), 50/140ns	17p	TO-220		BUK 657-600, BUZ 91, BUZ 305
2 SK 2028-01M	Fjd	MOS-N-FET-e	=2SK2027: Iso, 50W	17c	TO-220 Iso		-
2 SK 2029-01(L,S)	Fjd	MOS-N-FET-e	VFET, 900/30V, 3A, 60W, on<4Ω(1.5A), 30/75ns	30p	(TO-220MF)		2SK1510, 2SK1528, 2SK1659
2 SK 2030	Tos	MOS-N-FET-e	VFET, 60/20V, 5A, 20W, on<0.14Ω(2.5A), 65/70ns	30c	TO-251		2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 2032	Mat	MOS-N-FET-e	VFET, 450/30V, 13/26A, 100W, <0.45Ω(7A), 135/310ns	16c(p)	(TOP-3F)		2SK899, 2SK1678, 2SK1745, 2SK1757
2 SK 2033	Tos	MOS-N-FET-e	V-MOS, LogL, 20/10V, 0.1A, on<12Ω(10mA), 160/150ns int. Diode(S ·G)	35a	SOT-23		2SK1828
2 SK 2034	Tos	MOS-N-FET-e	=2SK2033:	35a(2mm)	SOT-323		2SK1829
2 SK 2035	Tos	MOS-N-FET-e	=2SK2033:	35a(1.6m)	SS Mini		2SK1830
2 SK 2036	Tos	MOS-N-FET-e	V-MOS, LogL, 20/10V, 0.1A, on<6Ω(10mA), 280/340ns int. Diode(S ·G)	35a	SOT-23		2SK2033
2 SK 2037	Tos	MOS-N-FET-e	=2SK2036:	35a(2mm)	SOT-323		2SK2034
2 SK 2038	Tos	MOS-N-FET-e	VFET, 800/30V, 5A, 125W, on<2.2Ω(3A), 70/165ns	18p	TO-3P	2SK727	2SK727, 2SK1341, 2SK1649...50, 2SK1794, ++
2 SK 2039	Tos	MOS-N-FET-e	VFET, 900/30V, 5A, 150W, on<2.5Ω(3A), 70/210ns	18p	TO-3P	2SK727	2SK727, 2SK1341, 2SK1649...50, 2SK1794, ++
2 SK 2040(Z)	Nec	MOS-N-FET-e*	VFET, 900/30V, ±2/6A, 20W, on<5Ω(1A), 11/45ns	30p	TO-251		-
					Z: TO-252		
2 SK 2041	Rhm	MOS-N-FET-e	VFET, LogL, 60/20V, 10/40A, 60W, on<95mΩ(5A)	30p	(TO-220MF)		2SK1907
2 SK 2042	Rhm	MOS-N-FET-e	VFET, 450/30V, 5/20A, 60W, on<1.4Ω(2.5A), 25/85ns	30p	(TO-220MF)		2SK1691
2 SK 2043(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 2/8A, 25W, on<4.3Ω(1A), 22/105ns LS: lead short	17c	TO-220 Iso		BUK 445-600, 2SK1142, 2SK1834, 2SK1953
2 SK 2044(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 4/16A, 30W, on<2.4Ω(2A), 28/200ns	17c	TO-220 Iso		2SK1637, 2SK1404, 2SK2097, 2SK2118, ++
2 SK 2045(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 5.5/22A, 35W, on<1.5Ω(3A), 43/300ns	17c	TO-220 Iso		2SK1118, 2SK1404, 2SK2118
2 SK 2046	Say	MOS-N-FET-e	VFET, LogL, 30/15V, 12A, 30W, <0.05Ω(4A), 53/250ns	30p	TO-251		2SK1754
2 SK 2047	Mat	MOS-N-FET-e	VFET, 550/30V, 1.2/3.6A, 15W, on<8Ω(0.6A), 35/100ns	-30c	(I Type)		-
2 SK 2048-01(L,S)	Fjd	MOS-N-FET-e	VFET, 30/20V, 35A, 60W, on<22mΩ(17.5A), 125/480ns	30p	(TO-220MF)		2SK1919
2 SK 2049	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 50A, 80W, <25mΩ(25A), 150/570ns	17p	TO-220		BUK 556-60, 2SK1542
2 SK 2050	Fjd	MOS-N-FET-e	VFET, LogL, 100/20V, 30A, 80W, <55mΩ(15A), 160/760ns	17p	TO-220		2SK1293
2 SK 2051-01(L,S)	Fjd	MOS-N-FET-e	VFET, 250/30V, 10A, 80W, <0.4Ω(5A), 60/150ns	30p	(TO-220MF)		2SK1636
2 SK 2052	Fjd	MOS-N-FET-e	VFET, 500/20V, 10A, 80W, <1.1Ω(5A), 85/290ns	18c	TO-3P Iso		2SK1329, 2SK1523, 2SK1696, 2SK1832
2 SK 2053	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 16/7V, ±5/10A, on<0.12Ω(2.5A)	39b	SOT-89		-
2 SK 2054	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, ±3/6A, on<0.2Ω(1.5A)	39b	SOT-89		-
2 SK 2055	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, ±2/4A, on<0.35Ω(1A)	39b	SOT-89		2SK1473
2 SK 2056	Tos	MOS-N-FET-e	VFET, 800/30V, 4A, 40W, <2.4Ω(2A)	17c	TO-220 Iso		2SK1808, 2SK1985
2 SK 2057	Tos	MOS-N-FET-e	VFET, 500/30V, 20A, 150W, <0.31Ω(12A), 60/280ns	18p	TO-3P		2SK1170, 2SK1411, 2SK1500, 2SK1680, ++

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 2058	Say	MOS-N-FET-e*	VFET, 250/30V, 25/100A, 120W, on<0,16 $\Omega$ (12A)	18p	TO-3P		2SK1491, 2SK1641, 2SK1673...74, 2SK2075
2 SK 2059(L,S)	Hit	MOS-N-FET-e*	VFET, 600/30V, 3/6A, 20W, on<5 $\Omega$ (2A), 33/95ns	30p	TO-251/252		-
2 SK 2062	Shi	MOS-N-FET-e	VFET, 250/30V, 10A, 50W, on<0,5 $\Omega$ , 75/100ns	30c	(TO-220MF)		2SK1636
2 SK 2063	Shi	MOS-N-FET-e	VFET, 250/30V, 20A, 60W, on<0,25 $\Omega$ , 140/160ns	30c	(TO-220MF)		2SK2254
2 SK 2064	Shi	MOS-N-FET-e	VFET, 300/30V, 10A, 50W, on<0,7 $\Omega$ , 75/100ns	30c	(TO-220MF)		-
2 SK 2065	Shi	MOS-N-FET-e	VFET, 300/30V, 20A, 60W, on<0,35 $\Omega$ , 140/160ns	30c	(TO-220MF)		-
2 SK 2066	Shi	MOS-N-FET-e	VFET, 500/30V, 3A, 40W, on<2,3 $\Omega$ , 45/75ns	30c	(TO-220MF)		2SK1314, 2SK1721
2 SK 2067	Shi	MOS-N-FET-e	VFET, 500/30V, 5A, 50W, on<1,4 $\Omega$ , 50/90ns	30c	(TO-220MF)		2SK1314, 2SK1541, 2SK1722
2 SK 2068	Shi	MOS-N-FET-e	VFET, 500/30V, 8A, 60W, on<0,85 $\Omega$ , 60/120ns	30c	(TO-220MF)		2SK1316, 2SK2187
2 SK 2069	Shi	MOS-N-FET-e	VFET, 500/30V, 10A, 60W, on<0,7 $\Omega$ , 70/143ns	30c	(TO-220MF)		2SK2187
2 SK 2070	Nec	MOS-N-FET-e*	VFET, LogL, 100/20V, $\pm$ 1,5/3A, 1W, on<0,35 $\Omega$ (1A)	9c	(SP-8)		-
2 SK 2071-01(L,S)	Fjd	MOS-N-FET-e	VFET, 600/30V, 2A, 20W, on<6,5 $\Omega$ (1A), 16/45ns	30p	TO-251/252		2SK2040
2 SK 2072-01(L,S)	Fjd	MOS-N-FET-e	VFET, 800/30V, 6A, 80W, on<2,1 $\Omega$ (3A), 50/130ns	-30p	(TO-3P o./ wo. Tab)		-
2 SK 2073	Say	N-FET	=2SK2074: SMD	35f	SOT-23		-
2 SK 2074	Say	N-FET	AM Tuner, 15V, Idss=6...20mA, Up=0,3...1,2V	40e			-
2 SK 2075	Hit	MOS-N-FET-e*	VFET, 250/30V, 20/80A, 100W, <0,13 $\Omega$ (10A), 140/315ns	18p	TO-3P		2SK1491, 2SK1641, 2SK2007, 2SK2058,++
2 SK 2076	Say	N-FET	SMD, Uni, 30V, Idss=0,4...1,1mA, Up=0,3...1,5V	35e,f	SOT-23		-
2 SK 2077	Tos	MOS-N-FET-e	VFET, 800/30V, 7A, 150W, on<1,7 $\Omega$ (3,5A), 190/570ns	18p	TO-3P		2SK1358, 2SK1502, 2SK1692, 2SK1795
2 SK 2078	Tos	MOS-N-FET-e	VFET, 800/30V, 9A, 150W, on<1,2 $\Omega$ (4A), 55/100ns	18p	TO-3P		2SK1796, 2SK1933
2 SK 2080-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 15A, 80W, on<0,55 $\Omega$ (8A), 170/330ns	18c	TO-3P Iso		2SK1269, 2SK1331, 2SK1405, 2SK1524
2 SK 2081-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 12A, 125W, on<0,6 $\Omega$ (6A), 80/170ns	18p	TO-3P		BUZ 339, 2SK1610, 2SK1745, 2SK1785
2 SK 2082-01	Fjd	MOS-N-FET-e	VFET, 900/30V, 8A, 150W, on<1,4 $\Omega$ (4,5A), 85/210ns	18p	TO-3P		2SK1614, 2SK1502, 2SK1692, 2SK1795,++
2 SK 2083	Say	MOS-N-FET-e	VFET, 900/30V, 5/10A, 70W, on<3,6 $\Omega$ (2A), 75/180ns	30p	(TO-220MF)		2SK1528, 2SK2006
2 SK 2084(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 20/20V, 7/28A, 20W, <53m $\Omega$ (4A), 75/180ns	30p	TO-251/252		2SK1472, 2SK1748, 2SK2415
2 SK 2085	Hit	MOS-N-FET-e*	VFET, LogL, 100/20V, 1/4A, 0,9W, on<0,9 $\Omega$ (0,5A)	7c(9mm)	TO-92L		2SK1736, 2SK2070
2 SK 2088	Tos	MOS-N-FET-e	VFET, 200/30V, 10A, 56W, on<0,4 $\Omega$ (5A), 32/50ns	30p	(TO-220MF)		2SK1636, 2SK2063
2 SK 2089	Tos	MOS-N-FET-e	VFET, 800/30V, 5A, 100W, on<2,4 $\Omega$ (2A), 75/165ns	30p	(TO-220MF)		-
2 SK 2090	Nec	MOS-N-FET-e*	SMD, V-MOS, LogL, 50/7V, $\pm$ 0,1/0,2A, <20 $\Omega$ (10mA)	35a(2mm)	SOT-323		-
2 SK 2091	Say	N-FET	=2SK2076:	35a(2mm)	SOT-323		-
2 SK 2094(L,S)	Rhm	MOS-N-FET-e	VFET, LogL, 60/20V, 2/8A, 20W, on<0,35 $\Omega$ (1A) 30/140ns	30p	TO-251 F5: TO-252		2SK1282, 2SK1763
2 SK 2095	Rhm	MOS-N-FET-e	VFET, LogL, 60/20V, 10/40A, 30W, on<95m $\Omega$ (5A)	17c	SOT-186		2SK1093, 2SK1256, 2SK1344, 2SK1895,++
2 SK 2096	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 45/180A, 100W, on<22m $\Omega$ (25A)	18p	TO-3P		2SK1297, 2SK1514, 2SK1665, 2SK1998
2 SK 2097	Hit	MOS-N-FET-e*	VFET, 600/30V, 4/16A, 35W, on<2,4 $\Omega$ (2A), 38/95ns	17c	TO-220 Iso		2SK1118, 2SK1404, 2SK1637, 2SK2118
2 SK 2098-01M	Fjd	MOS-N-FET-e	VFET, LogL, 150/20V, 20A, 50W, on<80m $\Omega$ (10A)	17c	TO-220 Iso		2SK1266
2 SK 2099-01(L,S)	Fjd	MOS-N-FET-e	VFET, 250/30V, 6A, 20W, on<0,85 $\Omega$ (3A), 40/50ns	30p	TO-251/252		2SK1920
2 SK 2100	Fjd	MOS-N-FET-e	VFET, 800/30V, 4A, 40W, on<3,3 $\Omega$ (2A), 30/75ns	17c	TO-220 Iso		2SK1808, 2SK1985
2 SK 2101-01M	Fjd	MOS-N-FET-e	VFET, 800/30V, 6A, 50W, on<2,1 $\Omega$ (3A), 50/130ns	17c	TO-220 Iso		-
2 SK 2103	Rhm	MOS-N-FET-e	SMD, VFET, LogL, 30/20V, 2/8A, <0,4 $\Omega$ (1A), 35/120ns	39b	SOT-89		2SK1311, 2SK1470, 2SK1717, 2SK2315,++
2 SK 2107	Tos	MOS-N-FET-e	VFET, 200/20V, 20A, 100W, <0,18 $\Omega$ (10A), 45/70ns	30p	(TO-220MF)		-
2 SK 2108	Say	MOS-N-FET-e*	VFET, LogL, 250/30V, 6/24A, 25W, <0,5 $\Omega$ (3A), 33/150ns	17c	TO-220 Iso		2SK1568...69, 2SK1668, 2SK1987, 2SK2425
2 SK 2109	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, $\pm$ 0,5/1A, on<0,8 $\Omega$ (0,3A)	39b	SOT-89		2SK1079, 2SK1697
2 SK 2110	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, $\pm$ 0,5/1A, on<1,2 $\Omega$ (0,3A)	39b	SOT-89		2SK1079, 2SK1728
2 SK 2111	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, $\pm$ 1/2A, on<0,45 $\Omega$ (0,5A)	39b	SOT-89		2SK1485, 2SK1726, 2SK1728
2 SK 2112	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 100/20V, $\pm$ 1/2A, on<0,8 $\Omega$ (0,5A)	39b	SOT-89		2SK1485, 2SK1728
2 SK 2113	Nec	GaAs-N-FET-d	SMD, HEMT, UHF, 3V, Idss=12...60mA, Up=0,3...2,5V F<1,2/Gp=18dB(900MHz)	44(SDSG)	SOT-343		-
2 SK 2114	Hit	MOS-N-FET-e*	VFET, 450/30V, 5/20A, 35W, on<1,4 $\Omega$ (2,5A), 35/80ns	17c	TO-220 Iso		2SK1231...32, 2SK1351, 2SK1608, 2SK1626,++
2 SK 2115	Hit	MOS-N-FET-e*	=2SK2114: 500/30V, on<1,5 $\Omega$ (2,5A)	17c	TO-220 Iso		2SK1232, 2SK1351, 2SK1608, 2SK1627,++
2 SK 2116	Hit	MOS-N-FET-e*	VFET, 450/30V, 7/28A, 35W, on<0,8 $\Omega$ (4A), 70/135ns	17c	TO-220 Iso		2SK1352, 2SK1566...67, 2SK1609, 2SK1805,++
2 SK 2117	Hit	MOS-N-FET-e*	=2SK2116: 500/30V, on<0,9 $\Omega$ (4A)	17c	TO-220 Iso		2SK1352, 2SK1567, 2SK1805
2 SK 2118	Hit	MOS-N-FET-e*	VFET, 600/30V, 5/20A, 35W, on<1,5 $\Omega$ (2,5A), 57/160ns	17c	TO-220 Iso		2SK1118, 2SK1404, 2SK1637, 2SK2097,++
2 SK 2119	Hit	MOS-N-FET-e*	=2SK1910: Iso, 30W	17c	TO-220 Iso		2SK943, 2SK1095, 2SK1345...46, 2SK1307,++
2 SK 2120	Hit	MOS-N-FET-e*	=2SK1911: Iso, 35W	17c	TO-220 Iso		2SK1257, 2SK1653, 2SK1952
2 SK 2121	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 50/200A, 100W, on<10m $\Omega$ (25A)	18p	TO-3P		BUK 539-60, 2SK1258, 2SK1379
2 SK 2122	Mat	MOS-N-FET-e	=2SK1478	17c	TO-220 Iso		2SK1478
2 SK 2123	Mat	MOS-N-FET-e	=2SK1605	17c	TO-220 Iso		2SK1605
2 SK 2124	Mat	MOS-N-FET-e	=2SK1606	17c	TO-220 Iso		2SK1606
2 SK 2125	Mat	MOS-N-FET-e	=2SK1833	17c	TO-220 Iso		2SK1833
2 SK 2126	Mat	MOS-N-FET-e	=2SK1608	17c	TO-220 Iso		2SK1608
2 SK 2127	Mat	MOS-N-FET-e	=2SK1609	17c	TO-220 Iso		2SK1609
2 SK 2128	Mat	MOS-N-FET-e	=2SK1834	17c	TO-220 Iso		2SK1834
2 SK 2129	Mat	MOS-N-FET-e	=2SK1846:	17c	TO-220 Iso		2SK1356, 2SK1460
2 SK 2130	Mat	MOS-N-FET-e	=2SK1612	17c	TO-220 Iso		2SK1612
2 SK 2131	Nec	MOS-N-FET-e*	VFET, 150/20V, $\pm$ 15/60A, 35W, <0,12 $\Omega$ (8A), 70/310ns	17c	TO-220 Iso		2SK1350
2 SK 2132	Nec	MOS-N-FET-e*	VFET, 180/20V, $\pm$ 4/16A, 1,8W, <0,65 $\Omega$ (2A), 19/40ns	78c	(MP-10)		-
2 SK 2133	Nec	MOS-N-FET-e	VFET, 250/30V, $\pm$ 16/64A, 75W, <0,26 $\Omega$ (8A), 60/80ns	17p	TO-220		BUZ 255
2 SK 2133 Z	Nec	MOS-N-FET-e	=2SK2133:	30p	(TO-220MF)		2SK1636, 2SK2063
2 SK 2134	Nec	MOS-N-FET-e	VFET, 200V, $\pm$ 13A, 70W, on<0,4 $\Omega$ (7A)	17p	TO-220		BUK 456-200, BUZ 255, IRF 640, IRF 642
2 SK 2135	Nec	MOS-N-FET-e	VFET, 200V, $\pm$ 14A, 35W, on<0,18 $\Omega$ (7A)	17c	TO-220 Iso		2SK1350
2 SK 2136	Nec	MOS-N-FET-e	VFET, 200V, $\pm$ 20A, 75W, on<0,18 $\Omega$ (10A)	17p	TO-220		BUZ 30A
2 SK 2137	Nec	MOS-N-FET-e	VFET, 600V, $\pm$ 4A, 30W, on<2,4 $\Omega$ (2A)	17c	TO-220 Iso		2SK1637, 2SK1404, 2SK2097, 2SK2118,++
2 SK 2138	Nec	MOS-N-FET-e	VFET, 600V, $\pm$ 5A, 70W, on<2,4 $\Omega$ (2,5A)	17p	TO-220		2SK1117, 2SK1402, 2SK1809, 2SK1923
2 SK 2139	Nec	MOS-N-FET-e	VFET, 600V, $\pm$ 5A, 35W, on<1,5 $\Omega$ (2,5A)	17c	TO-220 Iso		2SK1637, 2SK1404, 2SK2097, 2SK2118,++
2 SK 2140	Nec	MOS-N-FET-e	VFET, 600V, $\pm$ 7A, 75W, on<1,5 $\Omega$ (3,5A)	17p	TO-220		BUK 657-600, BUZ 91, BUZ 305, 2SK1924
2 SK 2141	Nec	MOS-N-FET-e	VFET, 600V, $\pm$ 6A, 35W, on<1,1 $\Omega$ (3A)	17c	TO-220 Iso		2SK1404, 2SK2045, 2SK2101, 2SK2118
2 SK 2142	Say	MOS-N-FET-e	VFET, 250/30V, 12/48A, 70W, <0,35 $\Omega$	17p	TO-220		BUZ 255, 2SK2133
2 SK 2144	Hit	MOS-N-FET-e*	=2SK2059: Iso, 25W	17c	TO-220 Iso		2SK1572, 2SK2044, 2SK1767
2 SK 2145	Tos	N-FET	SMD, Dual, 50V, Idss=1,2...14mA, Up=0,2...1,5V	45	SOT-153		-
2 SK 2146	Tos	MOS-N-FET-e	VFET, 250/30V, 2A, 25W, on<2 $\Omega$ (1A), 40/90ns	17c	TO-220 Iso		-
2 SK 2147	Fjd	MOS-N-FET-e	VFET, 900/30V, 6A, 80W, on<2,8 $\Omega$ (3A), 145/250ns	18c	TO-3P Iso		2SK1176, 2SK1464, 2SK1685, 2SK1859
2 SK 2148	Fjd	MOS-N-FET-e	VFET, 600/30V, 12A, 80W, <0,75 $\Omega$ (6A), 90/220ns	18c	TO-3P Iso		2SK1405
2 SK 2149	Tos	MOS-N-FET-e	VFET, 500/30V, 10A, 125W, on<2 $\Omega$ (1A), 45/120ns	18p	TO-3P		2SK1488, 2SK1516, 2SK1753, 2SK1785, ++
2 SK 2150	Tos	MOS-N-FET-e	VFET, 500/30V, 15A, 150W, <0,4 $\Omega$ (7A), 55/235ns	18p	TO-3P		BUZ 338, 2SK1516, 2SK1610, 2SK1745,++
2 SK 2151	Say	MOS-N-FET-e	SMD, VFET, LogL, 20/15V, 1A, <0,48 $\Omega$ (0,5A), 18/50ns	39b	SOT-89		2SK1485, 2SK1726, 2SK1728, 2SK2111
2 SK 2152	Say	MOS-N-FET-e	SMD, VFET, LogL, 20/15V, 2A, <0,18 $\Omega$ (1A), 22/85ns	39b	SOT-89		2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 2153	Say	MOS-N-FET-e	SMD, VFET, LogL, 20/18, 4A, 20W, on<90m $\Omega$	30p	TO-251		2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 2154	Say	MOS-N-FET-e	VFET, LogL, 20/18, 12A, 30W, on<42m $\Omega$	30p	TO-251		-
2 SK 2157	Nec	MOS-N-FET-e	SMD, VFET, LogL, 30/20, $\pm$ 5A, on<0,1 $\Omega$ (2,5A)	39b	SOT-89		-
2 SK 2158	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 50/7V, $\pm$ 0,1/0,2A, on<15 $\Omega$ (10mA)	35a	SOT-23		2SK1590...91
2 SK 2159	Nec	MOS-N-FET-e*	SMD, VFET, LogL, 60/14V, $\pm$ 2/4A, on<0,3 $\Omega$ (1A)	39b	SOT-89		2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 2160	Say	MOS-N-FET-e	VFET, LogL, 200/20V, 7/28A, 25W, on<0,45 $\Omega$ (3,5A)	17c	TO-220 Iso		BUK 545-200

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 SK 2161	Say	MOS-N-FET-e	VFET, LogL, 200/20V, 9/36A, 25W, on<0,35Ω(4,5A)	17c		TO-220 Iso	-
2 SK 2163	Say	MOS-N-FET-e	VFET, LogL, 60/20V, 40/160A, 40W, <20mΩ	17c		TO-220 Iso	2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 2164	Say	MOS-N-FET-e	VFET, LogL, 60/20V, 45/180A, 70W, <20mΩ	30p		(TO-220MF)	2SK1792, 2SK1919, 2SK2266
2 SK 2165	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 40A, 100W, <30mΩ(20A), 105/490ns	18p		TO-3P	BUK 539-60, 2SK1297, 2SK1514, 2SK2096
2 SK 2166	Fjd	MOS-N-FET-e	=2SK2165: Iso, 80W	18c		TO-3P	2SK1298, 2SK1666
2 SK 2167	Say	MOS-N-FET-e	SMD, VFET, 250/20V, 0,4A, <12Ω(0,2A), 20/80ns	39b		SOT-89	-
2 SK 2168	Say	MOS-N-FET-e	SMD, VFET, 250/20V, 0,8A, <5Ω(0,4A), 20/80ns	39b		SOT-89	-
2 SK 2169	Say	MOS-N-FET-e	VFET, 250/20V, 0,4A, 1W, <5Ω(0,2A), 20/105ns	9c		(NMP)	-
2 SK 2170	Say	N-FET	SMD, 30V, 20mA, Idss=1,2...4,5mA	35a(1,6mm)		SS Mini	-
2 SK 2171	Say	N-FET	SMD, 40V, 100mA, Idss=40...75mA	39b		SOT-89	-
2 SK 2173	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 50A, 125W, <17mΩ(25A), 55/180ns	18p		TO-3P	BUK 539-60, 2SK1258, 2SK1379, 2SK2121
2 SK 2174	Hit	MOS-N-FET-e*	VFET, 500/30V, 20/80A, 120W, <0,27Ω(10A), 147/290ns	=30c		(TO-3P / wo. Tab)	-
2 SK 2175	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 15/60A, 30W, on<0,13Ω(8A)	17p		TO-220	BUK 552-60, 2SK971...72, 2SK1115, 2SK1910
2 SK 2176	Rhm	MOS-N-FET-e	VFET, 500/30V, 5/20A, 30W, <1,5Ω(2,5A), 65/435ns	17c		SOT-186	2SK1231...2, 2SK1351, 2SK1608, 2SK2114...5
2 SK 2177	Shi	MOS-N-FET-e	VFET, 500/30V, 1A, 10W, on<7Ω, 35/60ns	30p		TO-251/252	2SK580, 2SK1152, 2SK1672, 2SK2017, ++
2 SK 2178	Shi	MOS-N-FET-e	VFET, 500/30V, 2A, 15W, on<4Ω, 40/70ns	30p		TO-251/252	-
2 SK 2179	Shi	MOS-N-FET-e	VFET, 500/30V, 3A, 20W, on<2,3Ω, 45/90ns	30p		TO-251/252	2SK2059
2 SK 2180	Shi	MOS-N-FET-e	VFET, 500/30V, 3A, 40W, on<2,3Ω, 45/90ns	17p		TO-220	2SK1154, 2SK1244, 2SK1494
2 SK 2181	Shi	MOS-N-FET-e	=2SK2180:	30c		(TO-220MF)	2SK1314, 2SK1721, 2SK2066
2 SK 2182	Shi	MOS-N-FET-e	=2SK2180: Iso, 25W	17c		TO-220 Iso	BUK 445-500, 2SK1863, 2SK1572, 2SK1767++
2 SK 2183	Shi	MOS-N-FET-e	VFET, 500/30V, 5A, 50W, on<1,5Ω, 55/110ns	17p		TO-220	BUZ 41...42, IRF 830, 2SK893, 2SK1246, ++
2 SK 2184	Shi	MOS-N-FET-e	=2SK2183:	30c		(TO-220MF)	2SK1314, 2SK1541, 2SK1722, 2SK2067
2 SK 2185	Shi	MOS-N-FET-e	=2SK2180: Iso, 30W	17c		TO-220 Iso	2SK1232, 2SK1351, 2SK1608, 2SK2115, ++
2 SK 2186	Shi	MOS-N-FET-e	VFET, 500/30V, 10A, 60W, on<1Ω, 70/140ns	17p		TO-220	2SK1503, 2SK2366
2 SK 2187	Shi	MOS-N-FET-e	=2SK2186:	30c		(TO-220MF)	2SK2069, 2SK2366Z
2 SK 2188	Shi	MOS-N-FET-e	=2SK2186: Iso, 40W	17c		TO-220 Iso	-
2 SK 2189	Shi	MOS-N-FET-e	=2SK2186: 70W	16p		(MTO-3P)	2SK724, 2SK896, 2SK1488, 2SK1753, ++
2 SK 2190	Shi	MOS-N-FET-e	=2SK2186: Iso, 40W	18c		(ITO-3P)	2SK1206, 2SK1329, 2SK1523, 2SK1696, ++
2 SK 2191	Shi	MOS-N-FET-e	VFET, 500/30V, 12A, 60W, on<0,7Ω, 90/190ns	30c		(TO-220MF)	-
2 SK 2192	Shi	MOS-N-FET-e	=2SK2191: 80W	16p		(MTO-3P)	2SK899, 2SK1678, 2SK1745, 2SK1757
2 SK 2193	Shi	MOS-N-FET-e	=2SK2186: Iso, 50W	18c		(ITO-3P)	2SK1269, 2SK1331, 2SK1524
2 SK 2194	Shi	MOS-N-FET-e	VFET, 500/30V, 15A, 110W, on<0,45Ω, 110/270ns	16p		(MTO-3P)	2SK725, 2SK899, 2SK1610, 2SK1745, ++
2 SK 2195	Shi	MOS-N-FET-e	=2SK2194: Iso, 60W	18c		(ITO-3P)	2SK1269, 2SK1331, 2SK1524
2 SK 2196	Shi	MOS-N-FET-e	VFET, 500/30V, 20A, 125W, on<0,35Ω, 135/340ns	16p		(MTO-3P)	2SK870, 2SK1170, 2SK1411, 2SK1498, ++
2 SK 2197	Shi	MOS-N-FET-e	=2SK2196: Iso, 70W	18c		(ITO-3P)	2SK1406, 2SK1525
2 SK 2198	Shi	MOS-N-FET-e	VFET, 500/30V, 30A, 220W, on<0,23Ω, 200/500ns	77p		TOP-3L	2SK1520, 2SK1629, 2SK1971
2 SK 2199	Tos	MOS-N-FET-e	VFET, 250/20V, 0,8A, 15W, on<5Ω(0,4), 20/95ns	30p		TO-251/252	2SK1838
2 SK 2200	Tos	MOS-N-FET-e	VFET, LogL, 100/20V, 3/12A, 20W, on<0,35Ω(2A)	30p		TO-252	2SK1113, 2SK1254, 2SK1284, 2SK1299
2 SK 2201	Tos	MOS-N-FET-e	=2SK2200:	30p		TO-251	=2SK2200
2 SK 2202	Hit	MOS-N-FET-e*	VFET, LogL, 120/20V, 7/14A, 20W, on<0,4Ω(4A)	17c		SOT-186	BUK 545-200, 2SK1957, 2SK2160...61
2 SK 2203	Hit	MOS-N-FET-e*	=2SK2121: Iso, 60W	=18c		(TO-3PFM)	2SK1298, 2SK1424, 2SK1666
2 SK 2204(LS)	Hit	MOS-N-FET-e*	=2SK2205:	30p		(TO-220MF)	2SK1792, 2SK1919, 2SK2164
2 SK 2205	Hit	MOS-N-FET-e*	VFET, LogL, 30/20V, 45/180A, 75W, on<15mΩ(25A)	17p		TO-220	2SK1542, 2SK1911
2 SK 2206	Hit	MOS-N-FET-e*	=2SK2205: Iso, 35W	17c		TO-220 Iso	2SK1257, 2SK1653, 2SK1952
2 SK 2207	Sak	MOS-N-FET-e	VFET, 900/30V, ±3A, 35W, on<5Ω(1,5A), 55/165ns				-
2 SK 2208	Sak	MOS-N-FET-e	VFET, 900/30V, ±5A, 75W, on<3Ω(2,5A), 60/155ns				-
2 SK 2212	Hit	MOS-N-FET-e*	VFET, 200/20V, 10/40A, 30W, on<0,3Ω(5A), 98/115ns	17c		SOT-186	2SK1036, 2SK1762, 2SK2011, 2SK2426
2 SK 2213-01(LS)	Fjd	MOS-N-FET-e	VFET, 500/30V, 10A, 80W, on<0,76Ω(5A), 55/130ns	30p		(TO-220MF)	2SK1865, 2SK2366Z
2 SK 2215-01(LS)	Fjd	MOS-N-FET-e	VFET, 600/30V, 8A, 80W, on<1,2Ω(4A), 50/140ns	30p		(TO-220MF)	-
2 SK 2218	Say	N-FET	SMD, 15V, 100mA, Idss=40...75mA	39b		SOT-89	-
2 SK 2219	Say	N-FET	SMD, C-Mic, 15V, Idss=0,14...0,5mA, U <sub>p</sub> =0,2...1,2V	35a(2mm)		SOT-323	-
2 SK 2220	Hit	MOS-N-FET-e*	VFET, LF Out, 180/20V, 8A, 100W, 250/90ns	{2SJ351		TO-3P	-
2 SK 2221	Hit	MOS-N-FET-e*	=2SK2220: 200/20V	{2SJ352		TO-3P	-
2 SK 2222	Tos	MOS-N-FET-e	VFET, LogL, 800/30V, 5A, 80W, <2,2Ω(3A), 70/165ns	16c(p)			-
2 SK 2223	Fjd	MOS-N-FET-e	VFET, 500/30V, 10A, 80W, <0,76Ω(5A), 55/130ns	18c		TO-3P Iso	2SK1329, 2SK1523, 2SK1696, 2SK1832
2 SK 2224	Fjd	MOS-N-FET-e	VFET, 900/30V, 3A, 50W, on<4Ω(1,5A), 30/75ns	18c		TO-3P Iso	2SK1463, 2SK1684, 2SK1859, 2SK2147, ++
2 SK 2225	Hit	MOS-N-FET-e*	VFET, 1500/20V, 2/7A, 50W, on<12Ω(1A), 67/200ns	16c		(TO-3PFM)	2SK1413
2 SK 2227	Say	MOS-N-FET-e	VFET, 600/30V, 4A, 60W, on<2,4Ω	30p		(TO-220MF)	2SK2089
2 SK 2228	Tos	MOS-N-FET-e	VFET, LogL, 60/20, 5A, 1,2W, <0,11Ω(2,5A), 60/300ns	=12c		(8x7mm)	(2SK1112, 2SK1471, 2SK1719, 2SK1949) <sup>+</sup>
2 SK 2229	Tos	MOS-N-FET-e	VFET, LogL, 60/20, 5A, 1,2W, <0,11Ω(2,5A), 25/170ns	=12c		(8x7mm)	(2SK1112, 2SK1471, 2SK1719, 2SK1949) <sup>+</sup>
2 SK 2230	Tos	MOS-N-FET-e	VFET, 250/30, 2A, 1,2W, <2Ω(1A), 30/85ns	=12c		(8x7mm)	(2SK2235, 2SK2250) <sup>+</sup>
2 SK 2231	Tos	MOS-N-FET-e	VFET, LogL, 60/20, 5/20A, 20W, on<0,16Ω(2,5A)	30p		TO-251	2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 2232	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 25A, 35W, <46mΩ(12A), 30/130ns	17c		TO-220 Iso	2SK1214, 2SK1345, 2SK1882, 2SK1897
2 SK 2233	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45A, 100W, <30mΩ(25A), 30/130ns	18p		TO-3P	2SK1297, 2SK1514, 2SK1665, 2SK1998, 2SK2096
2 SK 2234	Nec	MOS-N-FET-e	VFET, 500V, ±8A, 40W, on<0,6Ω(4A)	17c		TO-220 Iso	2SK1567, 2SK1609, 2SK1805, 2SK2117
2 SK 2235	Tos	MOS-N-FET-e	VFET, 250/30, 2A, 20W, on<2Ω(1,5A), 40/90ns	30p		TO-251	2SK2250
2 SK 2236	Tos	MOS-N-FET-e	VFET, 500/30V, 5A, 40W, on<1,6Ω(2,5A), 25/60ns	17c		TO-220 Iso	2SK1351, 2SK1608, 2SK1627, 2SK2115, ++
2 SK 2237	Tos	MOS-N-FET-e	VFET, 500/30V, 7A, 45W, on<0,8Ω(4A), 50/125ns	17c		TO-220 Iso	2SK1352, 2SK1567, 2SK1805, 2SK2117, ++
2 SK 2247	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, ±2/4A, <0,35Ω(1A), 8/37ns	39b		SOT-89	2SK1311, 2SK1717, 2SK1763, 2SK2315, ++
2 SK 2250-01(LS)	Fjd	MOS-N-FET-e	VFET, 250/30, 2A, 10W, on<2Ω(1A), 45/65ns	30p		TO-251/252	2SK2235
2 SK 2251-01	Fjd	MOS-N-FET-e	VFET, 250/30, 2A, 20W, on<2Ω(1A), 45/65ns	17p		TO-220	2SK923
2 SK 2252-01(LS)	Fjd	MOS-N-FET-e	VFET, 250/30V, 8A, 50W, on<0,5Ω(4A), 60/50ns	30p		(TO-220MF)	2SK1621
2 SK 2253-01M	Fjd	MOS-N-FET-e	VFET, 250/30V, 8A, 20W, on<0,5Ω(4A), 60/50ns	17c		TO-220 Iso	2SK1478, 2SK1568...69, 2SK1668, 2SK2425
2 SK 2254-01(LS)	Fjd	MOS-N-FET-e	VFET, 250/30V, 18A, 80W, <0,18Ω(9A), 80/150ns	30p		(TO-220MF)	2SK2063, 2SK2133Z
2 SK 2255-01M	Fjd	MOS-N-FET-e	=2SK2254: Iso	17c		TO-220 Iso	2SK2012
2 SK 2256-01	Fjd	MOS-N-FET-e	=2SK2254	17p		TO-220	2SK2133
2 SK 2257-01	Fjd	MOS-N-FET-e	VFET, 500/30V, 17A, 150W, on<0,4Ω(9A), 95/195ns	18p		TO-3P	2SK1610, 2SK1678, 2SK1745, 2SK1757
2 SK 2258-01	Fjd	MOS-N-FET-e	VFET, 1000/30V, 4A, 100W, on<3,6Ω(2A), 35/105ns	18p		TO-3P	BUZ 357...358, 2SK1205, 2SK1359, 2SK1773
2 SK 2259	Fjd	MOS-N-FET-e	VFET, LogL, 60/20V, 40A, 40W, <30mΩ(20A), 105/490ns	17c		TO-220 Iso	2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 2260	Say	MOS-N-FET-e	SMD, VFET, 150V, 1,2A, <2,2Ω	39b		SOT-89	2SK1334
2 SK 2264	Hit	MOS-N-FET-e*	VFET, 350/20V, 5/10A, 100W, on<2,8Ω(3A), 25/140ns	18p		TO-3P	BUZ 330...331, 2SK501
2 SK 2265	Hit	MOS-N-FET-e*	=2SK2264: 400/20V	18p		TO-3P	BUZ 330...331, 2SK501
2 SK 2266	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45A, 65W, <30mΩ(25A)	30p		(TO-220MF)	2SK1792, 2SK1919, 2SK2164
2 SK 2267	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 60A, 150W, <11mΩ(30A), 60/220ns	77p		TOP-3L	2SK1223, 2SK1259, 2SK1380
2 SK 2268	Say	N-FET	=2SK2270: SMD	35d(2mm)		SOT-323	-
2 SK 2269	Say	N-FET	=2SK2270: SMD	35i(3mm)		SOT-23	-
2 SK 2270	Say	N-FET	15V, 30mA, 0,3W, Idss=1,2...12mA	40f		(SPA)	-
2 SK 2273	Say	MOS-N-FET-e	SMD, VFET, LogL, 12/15V, 0,5A, <0,48Ω	35a		SOT-23	-
2 SK 2274	Tos	MOS-N-FET-e	VFET, 700/30V, 5A, 45W, on<1,7Ω(2A), 80/240ns	17c		TO-220 Iso	2SK1808, 2SK1985, 2SK2100
2 SK 2275	Nec	MOS-N-FET-e	VFET, 900V, ±3,5A, 35W, on<2,8Ω(2A)	17c		TO-220 Iso	2SK1356, 2SK1460, 2SK1808, 2SK1995

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 2278(L,S)	Hit	MOS-N-FET-e	=2SK1317:	-30p	(TO-3P o/w. Tab)	-	-
2 SK 2279	Shi	MOS-N-FET-e	VFET, 60/20V, 2A, 10W, on<0,35Ω, 20/80ns	(2SJ365	30p	TO-251	2SK973, 2SK1763, 2SK1973
2 SK 2280	Shi	MOS-N-FET-e	VFET, 60/20V, 5A, 10W, on<0,16Ω, 50/130ns		30p	TO-251	2SK1471, 2SK1719, 2SK1949
2 SK 2281	Shi	MOS-N-FET-e	VFET, 60/20V, 10A, 15W, on<0,1Ω, 70/250ns		30p	TO-251	2SK2018, 2SK2414
2 SK 2282	Shi	MOS-N-FET-e	VFET, 60/20V, 10A, 30W, on<0,1Ω, 70/250ns		30c	(TO-220MF)	2SK1620, 2SK2041
2 SK 2283	Shi	MOS-N-FET-e	=2SK2282: Iso, 20W		17c	TO-220 Iso	BUK 442-60, 2SK1033, 2SK1093, 2SK1344,++
2 SK 2284	Shi	MOS-N-FET-e	VFET, 60/20V, 15A, 40W, on<0,07Ω, 80/280ns	(2SJ371	30c	(TO-220MF)	2SK1648, 2SK1898, 2SK1967, 2SK2322
2 SK 2285	Shi	MOS-N-FET-e	=2SK2284: Iso, 25W	(2SJ372	17c	TO-220 Iso	2SK1094, 2SK1286, 2SK1419, 2SK1896
2 SK 2286	Shi	MOS-N-FET-e	VFET, 60/20V, 20A, 50W, on<45mΩ, 100/420ns	(2SJ373	30c	(TO-220MF)	2SK1622, 2SK1918, 2SK1967
2 SK 2287	Shi	MOS-N-FET-e	=2SK2286: Iso, 30W	(2SJ374	17c	TO-220 Iso	2SK1095, 2SK1345...46, 2SK1420, 2SK1951++
2 SK 2288	Shi	MOS-N-FET-e	VFET, 60/20V, 30A, 60W, on<30mΩ, 170/630ns	(2SJ375	30c	(TO-220MF)	2SK1792, 2SK1900
2 SK 2289	Shi	MOS-N-FET-e	=2SK2288: Iso, 40W	(2SJ376	17c	TO-220 Iso	2SK1421, 2SK1653, 2SK1952, 2SK2120
2 SK 2290	Shi	MOS-N-FET-e	VFET, 60/20V, 45A, 60W, on<18mΩ, 240/980ns		30c	(TO-220MF)	2SK1792, 2SK1919, 2SK2164, 2SK2266
2 SK 2291	Shi	MOS-N-FET-e	=2SK2290: Iso, 50W		17c	TO-220 Iso	2SK1421, 2SK1653, 2SK1952, 2SK2120
2 SK 2311	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 25A, 40W, <46mΩ(12A), 30/130ns		30p	(TO-220MF)	2SK1622, 2SK1918
2 SK 2312	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45A, 45W, <17mΩ(25A), 55/180ns		17c	TO-220 Iso	2SK1257, 2SK1653, 2SK1952, 2SK2120
2 SK 2313	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 60A, 150W, <11mΩ(30A), 60/220ns		18p	TO-3P	BUK 539-60, 2SK1258, 2SK1379, 2SK2121
2 SK 2315	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 60/20V, ±2/4A, <0,45Ω(1A), 21/85ns		39b	SOT-89	2SK1311, 2SK1470, 2SK1717, 2SK2055
2 SK 2316	Say	MOS-N-FET-e	SMD, VFET, LogL, 20/10V, 2A, on<0,2Ω		39b	SOT-89	2SK1311, 2SK1470, 2SK1717, 2SK2315
2 SK 2317	Say	MOS-N-FET-e	VFET, LogL, 20/10, 4A, 20W, on<85mΩ		30p	TO-251/252	2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 2318	Say	MOS-N-FET-e	VFET, LogL, 60/10V, 12A, 30W, on<38mΩ		30p	TO-251/252	2SK2018, 2SK2414
2 SK 2319	Tos	MOS-N-FET-e	VFET, 800/30V, 7A, 90W, on<1,7Ω(3.5A), 190/570ns		-18c(p)		BUK 638-800, 2SK1502, 2SK1795, 2SK1774++
2 SK 2320	Tos	MOS-N-FET-e	VFET, 800/30V, 8.5A, 90W, on<1,2Ω(4A), 55/100ns		-18c(p)		BUK 638-800, 2SK1358, 2SK1795, 2SK1775
2 SK 2321	Say	MOS-N-FET-e*	VFET, 250/30V, 12/48A, 70W, on<0,35Ω		30p	(TO-220MF)	2SK1636, 2SK2063, 2SK2133Z, 2SK2254
2 SK 2322(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 15/60A, 50W, on<50mΩ(8A)		30p	(TO-220MF)	2SK1648, 2SK1898, 2SK2322
2 SK 2328	Hit	MOS-N-FET-e*	=2SK1403A: 7/28A, 75W		17p	TO-220	-
2 SK 2329(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 30/20V, 10/40A, 20W, on<40mΩ(5A)		30p	TO-251/252	2SK2018, 2SK2414
2 SK 2330	Hit	MOS-N-FET-e*	=2SK1168:		-30p	(TO-3P o/w. Tab)	-
2 SK 2331	Tos	GaAs-N-FET-d	SHF, 3V, 120mA, Idss=25...120mA, Up=0,2...2V F<0,6/Gp=11dB(12GHz)		52(GSDS)		-
2 SK 2332	Tos	GaAs-N-FET-d	SHF, 3V, 80mA, Idss=20...80mA, Up=0,2...2V F<0,8/Gp=11dB(12GHz)		52(GSDS)		-
2 SK 2333	Shi	MOS-N-FET-e	VFET, 700/30V, 6A, 50W, on<2Ω, 70/160ns		17c	TO-220 Iso	-
2 SK 2334(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 20/80A, 30W, on<55mΩ(10A)		30p	TO-251/252	-
2 SK 2341	Nec	MOS-N-FET-e	VFET, 250V, ±11A, 35W, on<0,26Ω(6A)		17c	TO-220 Iso	2SK1036, 2SK1762, 2SK2011, 2SK2426
2 SK 2344	Say	MOS-N-FET-e	VFET, 20/12V, 7A, 2W, on<35mΩ(7A), 220/370ns		6-MDIP	(SOP8)	-
2 SK 2345	Hit	MOS-N-FET-e*	VFET, 350/30V, 6/24A, on<0,8Ω(5A), 50/95ns		17c	SOT-186	BUK 445-400, 2SK1351, 2SK1608, 2SK1627++
2 SK 2346	Hit	MOS-N-FET-e*	VFET, LogL, 60/20V, 20A, 25W, <50mΩ(10A), 105/310ns		17c	TO-220 Iso	2SK1214, 2SK1345, 2SK1882, 2SK1897
2 SK 2347	Say	MOS-N-FET-e	VFET, 1000/30V, 20/40A, 160W, on<0,8Ω		-77	(TO-3JML)	-
2 SK 2348	Say	MOS-N-FET-e	VFET, 1200/30V, 14/28A, 160W, on<1,5Ω		-77	(TO-3JML)	-
2 SK 2349	Say	MOS-N-FET-e	VFET, 1500/30V, 10/20A, 160W, on<2,5Ω		-77	(TO-3JML)	-
2 SK 2353	Nec	MOS-N-FET-e	=2SK2355: Iso, ±4,5A, 30W		17c	TO-220 Iso	2SK1231...2, 2SK1351, 2SK1608, 2SK2114...5
2 SK 2354	Nec	MOS-N-FET-e	=2SK2356: Iso, ±4,5A, 30W		17c	TO-220 Iso	2SK1232, 2SK1351, 2SK1608, 2SK2115
2 SK 2355	Nec	MOS-N-FET-e	VFET, 450/30V, ±5/20A, 50W, on<1,4Ω(2.5A), 19/48ns		17p	TO-220	2SK1156, 2SK1246, 2SK1440, 2SK1751
2 SK 2355	Nec	MOS-N-FET-e	=2SK2355: 500/30V, on<1,5Ω(2.5A)		17p	TO-220	2SK1156, 2SK1246, 2SK1751
2 SK 2355...2356 Z	Nec	MOS-N-FET-e	=2SK2355...2356:		30p	(TO-220MF)	2SK1540...1541
2 SK 2357	Nec	MOS-N-FET-e	=2SK2359: Iso, ±6A, 35W		17c	TO-220 Iso	2SK1566...7, 2SK1609, 2SK1805, 2SK2116...7
2 SK 2358	Nec	MOS-N-FET-e	=2SK2360: Iso, ±6A, 35W		17c	TO-220 Iso	2SK1567, 2SK1609, 2SK1805, 2SK2117,++
2 SK 2359	Nec	MOS-N-FET-e	VFET, 450/30V, ±7/28A, 75W, on<0,9Ω(4A), 23/70ns		17p	TO-220	2SK1495...96, 2SK1574, 2SK2408
2 SK 2360	Nec	MOS-N-FET-e	=2SK2359: 500/30V, on=1Ω(4A)		17p	TO-220	2SK1496, 2SK1574, 2SK2408
2 SK 2359...2360 Z	Nec	MOS-N-FET-e	=2SK2359...2360:		30p	(TO-220MF)	2SK1315...16, 2SK1540...1541, 2SK1864
2 SK 2361	Nec	MOS-N-FET-e	=2SK2365: 100W		18p	TO-3P	2SK1488, 2SK1516, 2SK1752...3, 2SK1784...5
2 SK 2362	Nec	MOS-N-FET-e	=2SK2366: 100W		18p	TO-3P	-
2 SK 2363	Nec	MOS-N-FET-e	=2SK2365: Iso, 35W		17p	TO-220 Iso	2SK1488, 2SK1516, 2SK1753, 2SK1785,++
2 SK 2364	Nec	MOS-N-FET-e	=2SK2366: Iso, 35W		17p	TO-220 Iso	-
2 SK 2365	Nec	MOS-N-FET-e	VFET, 450/30V, ±10/40A, 75W, on<0,5Ω(5A), 50/100ns		17p	TO-220	2SK1442, 2SK1503
2 SK 2366	Nec	MOS-N-FET-e	=2SK2365: 500/30V, on<0,6Ω(5A)		17p	TO-220	2SK1503
2 SK 2365...2366 Z	Nec	MOS-N-FET-e	=2SK2365...2366:		30p	(TO-220MF)	2SK1865
2 SK 2367	Nec	MOS-N-FET-e	VFET, 450V, ±15A, 120W, on<0,5Ω(8A)		18p	TO-3P	2SK1610, 2SK1678, 2SK1745, 2SK1757
2 SK 2368	Nec	MOS-N-FET-e	VFET, 500V, ±15A, 120W, on<0,6Ω(8A)		18p	TO-3P	2SK1610, 2SK1678, 2SK1745, 2SK1757
2 SK 2369	Nec	MOS-N-FET-e	VFET, 450V, ±20A, 120W, on<0,35Ω(10A)		18p	TO-3P	2SK1169...70, 2SK1497...1500, 2SK2057,++
2 SK 2370	Nec	MOS-N-FET-e	VFET, 500V, ±20A, 120W, on<0,4Ω(10A)		18p	TO-3P	2SK1169, 2SK1498, 2SK1500, 2SK2057,++
2 SK 2371	Nec	MOS-N-FET-e	VFET, 450V, ±25A, 160W, on<0,25Ω(13A)		18p	TO-3P	2SK1499...1500
2 SK 2372	Nec	MOS-N-FET-e	VFET, 500V, ±25A, 160W, on<0,27Ω(13A)		18p	TO-3P	2SK1500
2 SK 2373	Hit	MOS-N-FET-e*	SMD, VFET, LogL, 30/20V, ±0,2/0,4A, on<7Ω(10mA)		35a	SOT-23	2SK1590...91
2 SK 2376	Tos	MOS-N-FET-e	VFET, LogL, 60/20V, 45A, 100W, <20mΩ(25A)		30p	(TO-220MF)	2SK1792
2 SK 2378	Say	MOS-N-FET-e	VFET, 200/20V, 13/52A, 30W, on<0,21Ω		17c	TO-220 Iso	2SK1350
2 SK 2379	Say	MOS-N-FET-e	VFET, 200/20V, 20/80A, 40W, on<95mΩ		17c	TO-220 Iso	-
2 SK 2390	Say	MOS-N-FET-e*	VFET, LogL, 60/15V, 12/48A, 20W, on<90mΩ(6A)		17c	TO-220 Iso	2SK1093, 2SK1256, 2SK1305...06, 2SK1344++
2 SK 2393	Hit	MOS-N-FET-e*	VFET, 1500/20V, 8/20A, 200W, <2,8Ω(4A), 255/385ns		17c	TO-220 Iso	-
2 SK 2394	Say	N-FET	=2SK2395: SMD		35f	SOT-23	BF 513
2 SK 2395	Say	N-FET	HF, 15V, 50mA, Idss=6...32mA, Up=0,3...1,8V		40a	(SPA)	BC 264C...D
2 SK 2403	Say	MOS-N-FET-e	FREDFET, 450/30V, 3/12A, 50W, <3,2Ω		30p	(TO-220MF)	2SK2404
2 SK 2404	Say	MOS-N-FET-e	FREDFET, 450/30V, 5/20A, 60W, <1,6Ω		30p	(TO-220MF)	2SK2405
2 SK 2405	Say	MOS-N-FET-e	FREDFET, 450/30V, 10/40A, 70W, <0,75Ω		30p	(TO-220MF)	-
2 SK 2406	Say	MOS-N-FET-e	FREDFET, 450/30V, 1/4A, 30W, <4,5Ω		30p	TO-251/252	-
2 SK 2407	Say	MOS-N-FET-e	FREDFET, 450/30V, 10/40A, 70W, <0,75Ω		17p	TO-220	-
2 SK 2408	Hit	MOS-N-FET-e*	VFET, 500/30V, 7/21A, 60W, on<0,9Ω(4A), 70/148ns		17p	TO-220	2SK1496, 2SK1574, 2SK2360
2 SK 1411 Z	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±30/120A, 75W, on<40mΩ(15A)		17p	TO-220	2SK1291, 2SK1296
2 SK 1411 Z	Nec	MOS-N-FET-e*	=2SK2411:		30p	(TO-220MF)	2SK1900, 2SK1813
2 SK 2414(Z)	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±10/40A, 20W, on<0,07Ω(5A)		30p	TO-251	2SK2018, 2SK2329
2 SK 2415(Z)	Nec	MOS-N-FET-e*	VFET, LogL, 60/20V, ±8/32A, 20W, on<0,1Ω(4A)		30p	Z: TO-252	-
2 SK 2418(L,S)	Hit	MOS-N-FET-e*	VFET, LogL, 50/10V, 7/28A, 20W, on<50mΩ(4A)		30p	TO-251	2SK1472, 2SK1475, 2SK1748
2 SK 2422	Hit	MOS-N-FET-e*	VFET, 650/30V, 4/20A, 20W, on<2,6Ω(2A), 38/95ns		17c	SOT-186	2SK1637, 2SK1604, 2SK2097, 2SK2118,++
2 SK 2423	Hit	MOS-N-FET-e*	VFET, 450/30V, 7/28A, 35W, on<0,7Ω(4A), 72/143ns		17c	TO-220 Iso	2SK1352, 2SK1566...67, 2SK1609, 2SK1805++
2 SK 2424	Hit	MOS-N-FET-e*	VFET, 450/30V, 8/32A, 35W, on<0,55Ω(4A), 75/190ns		17c	TO-220 Iso	2SK1451, 2SK1447, 2SK1609, 2SK1805,++
2 SK 2425	Hit	MOS-N-FET-e*	VFET, 250/30V, 7/28A, 30W, on<0,55Ω(4A), 60/102ns		17c	TO-220 Iso	2SK1478, 2SK1568...69, 2SK1668, 2SK1987
2 SK 2426	Hit	MOS-N-FET-e*	VFET, 250/30V, 12/48A, 35W, on<0,35Ω(6A), 55/144ns		17c	TO-220 Iso	2SK1036, 2SK1762, 2SK2011
2 SK 2431	Hit	MOS-N-FET-e*	VFET, 450/30V, 3/12A, 25W, on<2,8Ω(3A), 27/50ns		17c	TO-220 Iso	BUK 445-450, 2SK1444, 2SK1862...63

Original	Fabric.	Constr.	Info	(Compl. Fig.	JAEGER	Fig.	International
2 SK 2432	Say	MOS-N-FET-e	VFET, LogL, 30/20V, 35/140A, 35W, on<25mΩ		(ZP)		-
2 SK 2433	Say	MOS-N-FET-e	VFET, LogL, 60/20V, 25/120A, 50W, on<40mΩ		(ZP)		-
2 SK 2434	Say	MOS-N-FET-e	VFET, 450/30V, 5/20A, 40W, on<1.4Ω		(ZP)		-
2 SK 2435	Say	MOS-N-FET-e	VFET, 800/30V, 3.5/10.5A, 40W, on<3.6Ω		(ZP)		-
2 SK 2436	Say	MOS-N-FET-e	VFET, 800/30V, 7/21A, 50W, on<1.8Ω		(ZP)		-
2 SK 2437	Say	MOS-N-FET-e	SMD, VFET, 30/20V, 2A, on<0.18Ω	39b	SOT-89		2SK1311, 2SK1717, 2SK1763, 2SK2315,++
2 SK 2438	Say	MOS-N-FET-e	VFET, 30/20, 4A, 20W, on<80mΩ	30p	TO-251/252		2SK1112, 2SK1471, 2SK1719, 2SK1949
2 SK 2439	Say	MOS-N-FET-e	VFET, 30/20V, 12A, 30W, on<40mΩ	30p	TO-251/252		2SK2018, 2SK2329, 2SK2414
2 SK 2440	Say	MOS-N-FET-e	VFET, 20/10V, 6A, 2W, on<38mΩ	8-MDIP	(SOP8)		-
2 SK 2441	Say	MOS-N-FET-e	VFET, 20/10V, 7A, 2W, on<32mΩ(7A), 220/370ns	8-MDIP	(SOP8)		-
2 SK 2442	Say	MOS-N-FET-e	VFET, 30/20V, 7A, 2W, on<48mΩ	8-MDIP	(SOP8)		-
2 SK 2464	Say	MOS-N-FET-e	VFET, 30/20V, 50/180A, 50W, on<12mΩ		(ZP)		-
2 SK 2530	Say	MOS-N-FET-e	VFET, 250V, 2A, 20W, on<2Ω	30p	TO-251/252		2SK2235, 2SK2250
2 SK 2531	Say	MOS-N-FET-e	FREDFET, 250/30V, 6/24A, 30W, on<0.8Ω		(ZP)		-
2 SK 2532	Say	MOS-N-FET-e	FREDFET, 250/30V, 10/40A, 40W, on<0.4Ω		(ZP)		-
2 SK 2533	Say	MOS-N-FET-e	FREDFET, 250/30V, 12/48A, 45W, on<0.28Ω		(ZP)		-
2 SK 2534	Say	MOS-N-FET-e	FREDFET, 250/30V, 16/64A, 50W, on<0.2Ω		(ZP)		-
2 SK 2539	Say	N-FET	SMD, 15V, 50mA, Idss=10...50mA	35f	SOT-23		-
2 SK 2552	Nec	N-FET	SMD, C-Mic, 20V, 10mA, Idss=40...600μA, Up=0,1...1V	35b(1,6mm)	SS Mini		-
2 SK 2555	Say	MOS-N-FET-e	VFET, 30/25V, 12A, 30W, on<46mΩ	30p	TO-251/252		2SK2018, 2SK2414
2 SK 2556	Say	MOS-N-FET-e	VFET, 30/25V, 6A, 2W, on<46mΩ	8-MDIP			-
2 SK 2557	Say	MOS-N-FET-e	VFET, 30/25V, 7A, 2W, on<37mΩ	8-MDIP			-
2 SK 2592	Say	MOS-N-FET-e	FREDFET, 250/30V, 13A, 60W, on<0.27Ω	30p	(TO-220MF)		-
2 SK 2616	Say	MOS-N-FET-e	VFET, 500/30V, 2/8A, 30W, on<4Ω	30p	TO-251/252		-
2 SK 2617	Say	MOS-N-FET-e	VFET, 500/30V, 4/16A, 25W, on<1.6Ω	17c	TO-220 Iso		2SK1351, 2SK1232, 2SK1608, 2SK1627,++
2 SK 2618(LS)	Say	MOS-N-FET-e	VFET, 500/30V, 5/20A, 30W, on<1.25Ω	17c	TO-220 Iso		2SK1351, 2SK1232, 2SK1608, 2SK1627,++
2 SK 2619	Say	MOS-N-FET-e	VFET, 500/30V, 6/24A, 70W, on<1.25Ω	30p	(TO-220MF)		2SK1540...1541, 2SK2356Z
2 SK 2620	Say	MOS-N-FET-e	VFET, 500/30V, 7/21A, 35W, on<0.8Ω	17c	TO-220 Iso		2SK1352, 2SK1567, 2SK1805, 2SK2117
2 SK 2621	Say	MOS-N-FET-e	VFET, 500/30V, 12/48A, 120W, on<0.6Ω	18p	TO-3P		2SK1488, 2SK1723, 2SK1745, 2SK1757,++
2 SK 2622	Say	MOS-N-FET-e	VFET, 500/30V, 14/56A, 125W, on<0.52Ω	18p	TO-3P		2SK1610, 2SK1678, 2SK1745, 2SK2257
2 SK 2623	Say	MOS-N-FET-e	VFET, 600/30V, 1.5/6A, 30W, on<5.5Ω	30p	TO-251/252		2SK1533, 2SK1880
2 SK 2624(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 3/12A, 25W, on<2.6Ω	17c	TO-220 Iso		2SK1572, 2SK1767, 2SK2044, 2SK2144
2 SK 2025(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 4/16A, 30W, on<2Ω	17c	TO-220 Iso		2SK1637, 2SK2044, 2SK2097, 2SK2118,++
2 SK 2626	Say	MOS-N-FET-e	VFET, 600/30V, 5/20A, 70W, on<2Ω	30p	(TO-220MF)		2SK1915, 2SK2089
2 SK 2627	Say	MOS-N-FET-e	VFET, 600/30V, 5/20A, 40W, on<2Ω		(ZP)		-
2 SK 2628(LS)	Say	MOS-N-FET-e	VFET, 600/30V, 6/24A, 35W, on<1.2Ω	17c	TO-220 Iso		2SK1118, 2SK1404, 2SK2045, 2SK2118
2 SK 2629	Say	MOS-N-FET-e	VFET, 600/30V, 10/40A, 120W, on<1Ω	18p	TO-3P		BUZ 334, 2SK1723, 2SK1968
2 SK 2630	Say	MOS-N-FET-e	VFET, 600/30V, 10/40A, 120W, on<1Ω	18p	TO-3P		BUZ 334, 2SK1573, 2SK1723, 2SK1968
2 SK 2631	Say	MOS-N-FET-e	VFET, 800/30V, 1/3A, 30W, on<10Ω	30p	TO-251/252		2SK1533
2 SK 2632(LS)	Say	MOS-N-FET-e	VFET, 800/30V, 2.5/7.5A, 25W, on<4.8Ω	17c	TO-220 Iso		BUK 445-600, 2SK1142, 2SK1834, 2SK1953
2 SK 2633(LS)	Say	MOS-N-FET-e	VFET, 800/30V, 3/9A, 30W, on<3.6Ω	17c	TO-220 Iso		2SK1356, 2SK1460, 2SK1808, 2SK1995
2 SK 2634	Say	MOS-N-FET-e	VFET, 800/30V, 3.5/10.5A, 70W, on<3.6Ω	30p	(TO-220MF)		2SK1510, 2SK1528, 2SK1659, 2SK1858
2 SK 2635	Say	MOS-N-FET-e	VFET, 800/30V, 5/13.5A, 100W, on<2.6Ω	18p	TO-3P		2SK1341, 2SK1461, 2SK1649...50, 2SK1794,++
2 SK 2636	Say	MOS-N-FET-e	VFET, 800/30V, 7/21A, 120W, on<1.8Ω	18p	TO-3P		2SK1358, 2SK1614, 2SK1502, 2SK1692, ++
2 SK 2637	Say	MOS-N-FET-e	VFET, 20/20V, 8A, 2W, on<25mΩ	8-MDIP			-
2 SM 148	Say	Triac	200V, 6A-(Tc=75°), Igt/Ih<45/10mA, Igt=2,2μs	22m	TO-66	(TAG 232-600) <sup>5</sup> 17j	T 2700B, TAG 261-200, TAG 266-200,++
2 SM 149	Say	Triac	=2SM148: 400V	22m	TO-66	(TAG 232-600) <sup>5</sup> 17j	T 2700D, TAG 261-400, TAG 266-400,++
2 SM 150	Say	Triac	=2SM148: 600V	22m	TO-66	(TAG 232-600) <sup>5</sup> 17j	T 2700M, TAG 261-600, TAG 266-600,++
2 SM 152	Mat	Triac	200V, 1A-, Igt<15mA	13j	TO-202		TAG 137..., TAG 138...
<b>2ST</b>							
2 ST 1396	Tho	Si-N+Di	=2SD1396	18j	TO-3P	-2SD1396	+2SD1396
2 ST 1651 FI	Tho	Si-N+Di	=2SD1651	18c	TO-3P Iso	-2SD1651	+2SD1651
2 ST 1877 FI	Tho	Si-N+Di	=2SD1877	18c	TO-3P Iso	-2SD1877	+2SD1877
2 ST 1942	Tho	Si-N	=2SC1942	23a	TO-3	-2SC1942	+2SC1942
2 ST 2000	Tho	Si-N	=S 2000	18j	TO-3P	-S 2000	+S 2000
2 ST 2000 FI	Tho	Si-N	=S 2000AF	18c	TO-3P Iso	-S 2000 AF	+S 2000AF
2 ST 3153	Tho	Si-N	=2SC3153: 1000V	18j	TO-3P	-2SC3153	+2SC3153
2 ST 3412	Tho	Si-N	=2SC3412	23a	TO-3	-2SC3412	+2SC3412
2 ST 3460	Tho	Si-N	=2SC3460: 1500V	18j	TO-3P	BU 508 A	BU 508A, BU 908, BU 2508A
2 ST 3461	Tho	Si-N	=2SC3461: 1500V	18j	TO-3P	BU 508 A	BU 508A, BU 908, BU 2508A
2 ST 3485	Tho	Si-N	=2SC3485	18j	TO-3P	-2SC3485	+2SC3485
2 ST 3485 FI	Tho	Si-N	=2SC3485: Iso	18c	TO-3P Iso	BU 2508 AF	2SC3884A, 2SC3894
2 ST 3552	Tho	Si-N	=2SC3552: 1200V	18j	TO-3P	-2SC3552	+2SC3552
2 ST 3642	Tho	Si-N	=2SC3642: 1200V	18j	TO-3P	-2SC3642	+2SC3642
2 ST 3679 FI	Tho	Si-N	=2SC3679: Iso, 1000V	18c	TO-3P Iso	(BUW 11 A) <sup>3</sup> 18j	BUW 11AF, 2SC4300, 2SC4427
<b>2T....2Z</b>							
2 T		Si-N	=HT 2 (SMD-Marking)	35	SOT-23		+HT 2
2 T		Si-P	=MMBT 4403 (SMD-Marking)	35	SOT-23		+MMBT 4403
2 T		Si-P	=SO 4403 (SMD-Marking)	35	SOT-23		+SO 4403
2 T 31	Son	Ge-P	+2SB48...50			-2SB48...59	
2 T 32	Son	Ge-P	+2SB51...52			-2SB51...52	
2 T 38	Son	Ge-P	+2SB53			-2SB53	
2 T 73	Son	Ge-N	+2SC73			-2SC73	
2 T 75	Son	Ge-N	+2SC75			-2SC75	
2 T 76	Son	Ge-N	+2SC76			-2SC76	
2 T 77	Son	Ge-N	+2SC77			-2SC77	
2 T 78	Son	Ge-N	+2SC78			-2SC78	
2 T 201	Son	Ge-P	+2SA121...123			-2SA121...123	
2 T 301	Son	Ge-P	+2SB140			-2SB140	
2 T 302	Son	Ge-P	+2SB141			-2SB141	
2 T 303	Son	Ge-P	+2SB142...144			-2SB142...144	
2 T 304	Son	Ge-P	+2SB145...146			-2SB145...146	
2 T 305	Son	Ge-P	+2SB27...29			-2SB27...29	
2 T 306	Son	Ge-P	+2SB30...31			-2SB30...31	
2 U		Si-P	=MMBTA 63 (SMD-Marking)	35	SOT-23		+MMBTA 63
2 V		Si-P	=MMBTA 64 (SMD-Marking)	35	SOT-23		+MMBTA 64
2 V 435	Sgs	Si-P	+2N3726				
2 W		Si-N	=2SC3704 (SMD-Marking)	35	SOT-23		+2SC3704

Original	Fabric.	Constr.	Info	{Compl. Fig.	JAEGER	Fig.	International
2 W		Si-N	=2SC3937 (SMD-Marking)	35(2mm)	SOT-323		+2SC3937
2 W		Si-P	=FMMT 3905 (SMD-Marking)	35	SOT-23		+FMMT 3905
2 W 01M...10M		Si-Br	50...1000V, 2A	8			B30...500C2200
2 X		Si-N	=2SC3707 (SMD-Marking)	35	SOT-23		+2SC3707
2 X		Si-N	=2SC4410 (SMD-Marking)	35(2mm)	SOT-323		+2SC4410
2 X		Si-N	=MMBT 4401 (SMD-Marking)	35	SOT-23		+MMBT 4401
2 X		Si-N	=SO 4401 (SMD-Marking)	35	SOT-23		+SO 4401
2 Y 4		Z-Di	=BZV 49/C2V4(SMD-Marking)	39	SOT-89		+BZV 49/C2V4
2 Y 7		Z-Di	=BZV 49/C2V7(SMD-Marking)	39	SOT-89		+BZV 49/C2V7
2 YQ		Si-N	=2SC3757-Q (SMD-Marking)	35	SOT-23		+2SC3757
2 YQ		Si-N	=2SC3938-Q (SMD-Marking)	35(2mm)	SOT-323		+2SC3938
2 YQ		Si-N	=2SC4691-Q (SMD-Marking)	35(1,6mm)	SS Mini		+2SC4691
2 YQ		Si-N	=2SC4969-Q (SMD-Marking)	-35	(T Mini)		+2SC4969
2 YR		Si-N	=2SC3757-R (SMD-Marking)	35	SOT-23		+2SC3757
2 YR		Si-N	=2SC3938-R (SMD-Marking)	35(2mm)	SOT-323		+2SC3938
2 YR		Si-N	=2SC4691-R (SMD-Marking)	35(1,6mm)	SS Mini		+2SC4691
2 YR		Si-N	=2SC4969-R (SMD-Marking)	-35	(T Mini)		+2SC4969
2 YS		Si-N	=2SC3757-S (SMD-Marking)	35	SOT-23		+2SC3757
2 YS		Si-N	=2SC3938-S (SMD-Marking)	35(2mm)	SOT-323		+2SC3938
2 YS		Si-N	=2SC4691-S (SMD-Marking)	35(1,6mm)	SS Mini		+2SC4691
2 Z		Si-N	=2SC4417 (SMD-Marking)	35(2mm)	SOT-323		+2SC4417
<b>2.1...3</b>							
2,1 St 10	old	Se-St	2,1V, 10mA			(Z-Diode 2,1V)	31a
2,8 St 10	old	Se-St	2,8V, 10mA			(Z-Diode 2,7V)	31a
3		C-Di	=HSU276,277 (SMD-Marking)	71(1,7mm)	SOD-323		+HSU 276, HSU 277
3		C-Di	=HVU 306(A) (SMD-Marking)	71(1,7mm)	SOD-323		+HVU 306(A)
3.0B		Z-Di	=HZF 3.0BP (SMD-Marking)	71(5mm)			+HZF 3.0BP
3.0C		Z-Di	=HZF 3.0CP (SMD-Marking)	71(5mm)			+HZF 3.0CP
3.3B		Z-Di	=HZF 3.3BP (SMD-Marking)	71(5mm)			+HZF 3.3BP
3.3C		Z-Di	=HZF 3.3CP (SMD-Marking)	71(5mm)			+HZF 3.3CP
3.6B		Z-Di	=HZF 3.6BP (SMD-Marking)	71(5mm)			+HZF 3.6BP
3.6C		Z-Di	=HZF 3.6CP (SMD-Marking)	71(5mm)			+HZF 3.6CP
3.9B		Z-Di	=HZF 3.9BP (SMD-Marking)	71(5mm)			+HZF 3.9BP
3.9C		Z-Di	=HZF 3.9CP (SMD-Marking)	71(5mm)			+HZF 3.9CP
3 A(p.s)		Si-P	=BC 856A (SMD-Marking)	35	SOT-23		+BC 856
3 A		Si-P	=BC 856AW (SMD-Marking)	35(2mm)	SOT-323		+BC 856W
3 A		Si-St	=MA 30-A (SMD-Marking)	71(1,7mm)	SOD-323		+MA 30-A
3 A		Si-N	=MMBT 24 (SMD-Marking)	35	SOT-23		+MMBT 24
3 A 16		N-FET	=2N3819	7e	TO-92	BF 245	7f
3 AG		Si-P	=2SA1324-GR (SMD-Marking)	35	SOT-23		+2SA1324
3 AO		Si-P	=2SA1324-O (SMD-Marking)	35	SOT-23		+2SA1324
3 AR		Si-P	=BC 856AR (SMD-Marking)	35	SOT-23		+BC 856R
3 AY		Si-P	=2SA1324-Y (SMD-Marking)	35	SOT-23		+2SA1324
3 B(p.s)		Si-P	=BC 856B (SMD-Marking)	35	SOT-23		+BC 856
3 B		Si-P	=BC 856BW (SMD-Marking)	35(2mm)	SOT-323		+BC 856W
3 B		Si-N	=FMMT 918 (SMD-Marking)	35	SOT-23		+FMMT 918
3 B		Si-St	=MA 30-B (SMD-Marking)	71(1,7mm)	SOD-323		+MA 30-B
3 B		Si-N	=MMBT 918 (SMD-Marking)	35	SOT-23		+MMBT 918
3 BG		Si-P	=2SA1325-GR (SMD-Marking)	35	SOT-23		+2SA1325
3 BL		Si-P	=2SA1325-BL (SMD-Marking)	35	SOT-23		+2SA1325
3 BP		MOS-N-FET-d	=3SK139-P (SMD-Marking)	44	SOT-143		+3SK139
3 BQ		MOS-N-FET-d	=3SK139-Q (SMD-Marking)	44	SOT-143		+3SK139
3 BR		Si-P	=BC 856BR (SMD-Marking)	35	SOT-23		+BC 856R
3 BZ 61		Si-Di		31a		BY 255	31a
3 C		Si-St	=MA 30W-A (SMD-Marking)	71(1,7mm)	SOD-323		+MA 30W-A
3 C 2		N-FET	=2N5245	7e	TO-92	BF 245	7f
3 C 2 P		N-FET	=2N5245	7f	TO-92	BF 245	7f
3 CO		Si-P	=2SA1326-O (SMD-Marking)	35	SOT-23		+2SA1326
3 CY		Si-P	=2SA1326-Y (SMD-Marking)	35	SOT-23		+2SA1326
3 D(p)		Si-P	=BC 856 (SMD-Marking)	35	SOT-23		+BC 856
3 D		Si-P	=BC 856W (SMD-Marking)	35(2mm)	SOT-323		+BC 856W
3 D		Si-St	=MA 30W-B (SMD-Marking)	71(1,7mm)	SOD-323		+MA 30W-B
3 D		Si-P	=MMBT 81 (SMD-Marking)	35	SOT-23		+MMBT 81
3 DO		MOS-N-FET-d	=3SK143-O (SMD-Marking)	44	SOT-143		+3SK143
3 DP		MOS-N-FET-d	=3SK143-P (SMD-Marking)	44	SOT-143		+3SK143
3 DQ		MOS-N-FET-d	=3SK143-Q (SMD-Marking)	44	SOT-143		+3SK143
3 E(p.s)		Si-P	=BC 857A(SMD-Marking)	35	SOT-23		+BC 857A
3 E		Si-P	=BC 857AW (SMD-Marking)	35(2mm)	SOT-323		+BC 857W
3 E		Si-N	=FMMT-A42 (SMD-Marking)	35	SOT-23		+FMMT-A42
3 E		Si-N	=MMBT 10 (SMD-Marking)	35	SOT-23		+MMBT 10
3 EQ		MOS-N-FET-d	=3SK144-Q (SMD-Marking)	44	SOT-143		+3SK144
3 ER		MOS-N-FET-d	=3SK144-R (SMD-Marking)	44	SOT-143		+3SK144
3 ER		Si-P	=BC 857AR (SMD-Marking)	35	SOT-23		+BC 857R
3 EZ 3.9...200 D...	Mot.Sie	Z-Di	3.9...200V, 3W, D1=1%, D2=2%, D10=10%	31a	DO-41		BZT03/..., BZV16/..., BZX40/..., BZV48/...
3 F(p.s)		Si-P	=BC 857B(SMD-Marking)	35	SOT-23		+BC 857
3 F		Si-P	=BC 857BW (SMD-Marking)	35(2mm)	SOT-323		+BC 857W
3 F		Si-N	=MMBT 6543 (SMD-Marking)	35	SOT-23		+MMBT 6543
3 FP		MOS-N-FET-d	=3SK169-P (SMD-Marking)	44	SOT-143		+3SK169
3 FO		MOS-N-FET-d	=3SK169-Q (SMD-Marking)	44	SOT-143		+3SK169
3 FR		Si-P	=BC 857BR (SMD-Marking)	35	SOT-23		+BC 857R
3 G		Si-P	=BC 857CW (SMD-Marking)	35(2mm)	SOT-323		+BC 857W
3 H(p)		Si-P	=BC 857 (SMD-Marking)	35	SOT-23		+BC 857
3 H		Si-P	=BC 857W (SMD-Marking)	35(2mm)	SOT-323		+BC 857W
3 J(p.s)		Si-P	=BC 858A(SMD-Marking)	35	SOT-23		+BC 858
3 J		Si-P	=BC 858AW (SMD-Marking)	35(2mm)	SOT-323		+BC 858W
3 Jp		Si-P	=BCV 62A (SMD-Marking)	44	SOT-143		+BCV 62
3 JR		Si-P	=BC 858AR (SMD-Marking)	35	SOT-23		+BC 858R
3 Js		Si-P	=BCV 62A (SMD-Marking)	44	SOT-143		+BCV 62
3 K(p.s)		Si-P	=BC 858B (SMD-Marking)	35	SOT-23		+BC 858
3 K		Si-P	=BC 858BW (SMD-Marking)	35(2mm)	SOT-323		+BC 858W
3 Kp		Si-P	=BCV 62B (SMD-Marking)	44	SOT-143		+BCV 62
3 KR		Si-P	=BC 858BR (SMD-Marking)	35	SOT-23		+BC 858R