

# **Hybrid Subscriber Line Interface Circuit (SLIC)**

**Preliminary Information** 


#### **Features**

- · Differential to single ended conversion
- · No transformers required
- Minimum installation space
- · Off-Hook detection and LED indicator drive
- Relay drive output
- Battery and ringing feed to line
- Logic interface: MUTE, OFHK, RC
- · Mute of incoming audio
- · Dial pulse detection
- Voltage surge protection

### **Applications**

Line Interface for:

- PABX
- Intercoms
- Key Systems

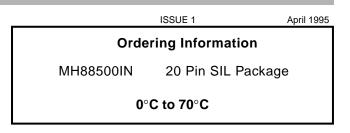

#### Description

The Mitel MH88500IN Subscriber Line Interface Circuit provides a complete interface between the telephone line and a speech switch requiring only single bidirectional switch per crosspoint. The functions provided by the MH88500IN include bidirectional differential to single ended conversion in the speech path, line battery feed, ringing feed and loop and dial pulse detection. The device is fabricated as a thick film hybrid in a 20-pin 'single-inline' package allowing optimum circuit board packing density.

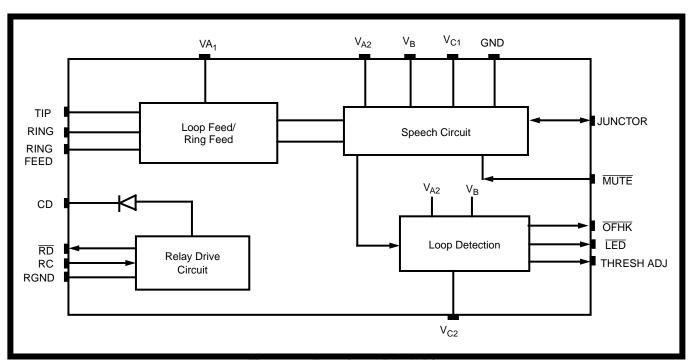


Figure 1 - Functional Block Diagram

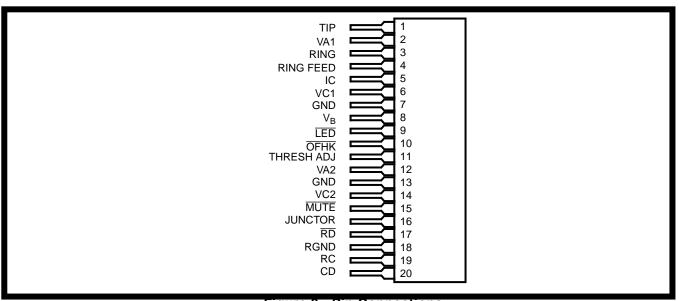


Figure 2 - Pin Connections

## **Pin Description**

Pin#	Name	Description				
1	TIP	Tip Lead. Connects to the "Tip" lead (A-wire) of the telephone line.				
2	V <sub>A1</sub>	Positive Line Feed Supply Voltage. Normally connected to V <sub>A2</sub> .				
3	RING	Ring Lead. Connects to the "Ring" lead (B-wire) of the telephone line.				
4	RING FEED	Negative Line Feed Voltage and Ringing Input. Normally connected to Ring Relay.				
5	IC	Internal Connection. Leave open circuit. Use for testing only.				
6	V <sub>C1</sub>	Sense Input. Normally connected to negative line feed voltage supply.				
7	GND	Analog ground (0V). Internally connected to pin 13.				
8	V <sub>B</sub>	Negative Analog Supply Voltage.				
9	LED	LED Drive Output. Drives an LED directly. Off-Hook condition, logic low.				
10	OFHK	Logic Low Output. Indicates closed loop condition (Off-Hook and dial pulsing).				
11	THRESH ADJ	Allows adjustment of OFHK detection threshold.				
12	V <sub>A2</sub>	Positive Power Supply Voltage. Normally connected to V <sub>A1</sub> .				
13	GND	Analog Ground (0V). Internally connected to pin 7.				
14	V <sub>C2</sub>	Loop Detector Voltage Supply. Connected to negative line feed voltages supply.				
15	MUTE	Input mutes the incoming audio. Active low.				
16	JUNCTOR	Receive/transmit audio speech path. (referenced to 0V GND)				
17	RD	Relay Drive Output. Open collector sinks current when RC high. Diode clamp protected.				
18	RGND	Ground for Relay Drive Circuit.				
19	RC	Ring Control Input. Active high.				
20	CD	Clamping Diode. Normally connected to relay positive voltage.				

### **Functional Description**

#### **Speech Circuit**

The speech circuit converts the bidirectional TIP and RING line pair to a bidirectional single ended junctor line. Figure 3 illustrates a typical connection between two SLIC's through two crosspoint switches. This configuration gives optimum transhybrid loss as seen from Figure 4 given that the output impedance of the Junctor line is  $604\Omega$ .

The MUTE input mutes signals coming from TIP and RING to the junctor line while allowing the signal from the junctor to the tip-ring pair to be transmitted.

#### **Loop Detection**

The loop detection circuit determines whether a low enough impedances is across TIP and RING to be recognized as an off-hook condition.

(Threshold impedance =  $5.4k\Omega$  with no adjustment) This threshold level can be adjusted by the use of external resistors as shown in Figure 6.  $\overline{OFHK}$  has low output drive capability so it may drive CMOS operating with different power supplies.

#### Line Feed/Ring Feed Circuit

The line feed circuit provides loop current and the ability to apply ringing onto TIP and RING. The impedance from RING FEED to GND is  $600\Omega$  which gives the loop current as:

IL = <u>Voltage at RING FEED pin</u> Amps Telephone Impedance + 600

The positive supply for the line feed circuit is  $V_{A1}$  through the loop current is determined from RING FEED and GND.

### **Relay Drive Circuit**

The relay drive circuit switches ringing onto RING FEED (Fig.7). The diode is present to suppress voltage transients during relay switches caused by the inductive coils of the relay. Ringing voltage includes AC ringing (90V typically) an dDC line feed voltage (-24V typically).

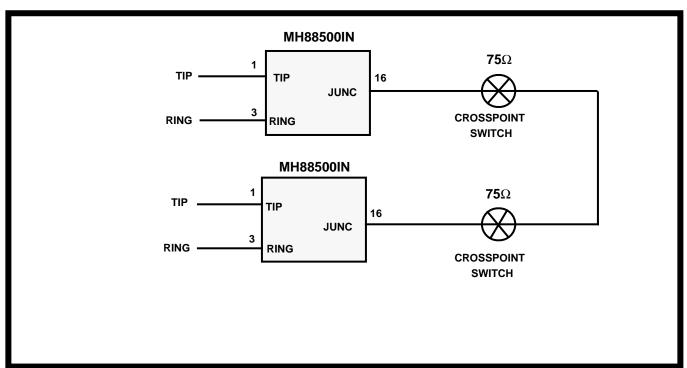


Figure 3 - SLIC Crosspoint Switch Connection

Absolute Maximum Ratings<sup>†</sup>

	Parameter	Symbol	Min	Max	Units
1	Voltage Supplies - V <sub>Ref</sub> to GND				V
		V <sub>B</sub>	-18	+18	V
		V <sub>C1</sub> , V <sub>C2</sub>	-35		V
2	Clamp Diode Breakdown Voltage-V <sub>Ref</sub> to RGND	V <sub>CD</sub>		+15	V
3	Operating Temperature	T <sub>AMB</sub>	0	+70	°C
4	Storage Temperature	T <sub>STG</sub>	-40	+100	°C
5	Power Dissipation	P <sub>D</sub>		1.2	Watt

<sup>†</sup> Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied.

## AC Electrical Characteristics<sup>†</sup>

Voltages are with respect to ground (V<sub>SS</sub>), TA = 25  $^{\circ}$ C, unless otherwise stated. Test conditions unless noted, V<sub>A1</sub>=V<sub>A2</sub>=+7V, V<sub>B</sub>=8V, V<sub>C2</sub>=-24V( $\pm$ 5%).

	Characteristics	Sym	Min	Typ <sup>‡</sup>	Max	Units	Test Conditions
1	Junctor to differential output (tip-ring) gain.	$A_{JL}$	0.8	1.0 0	1.2	V/V dB	1kHz, 400mV <sub>RMS</sub> source on pin 16. Note 2
2	Differential Input (tip-ring) to junctor gain	$A_{LJ}$	0.8	1.0 0	1.2	V/V dB	1kHz, 1V <sub>RMS</sub> Source on pins 1&3. Note 1,2
3	On/Off Hook Detection Threshold						
	Loop Resist Loop Current	R <sub>Thresh</sub> I <sub>Thresh</sub>	4.0 3.6	5.4 4.0	6.0 5.3	kΩ mA	Note 1 Note 1
4	Trans Hybrid Loss			55		dB	Notes 1,2. See Figure 2
5	Passband Linearity			<u>+</u> 1		dB	Notes 1,2
6	Power Supply Rejection Ratio (VC to Junctor)	PSRR		40		dB	Notes 1,2
7	Common Mode Rejection Ratio (Tip and Ring to Junctor)	CMRR		40		dB	Notes 1,2
8	Low Frequency Cutoff (3dB)  Junctor to Line  Line to Junctor	F <sub>LLJ</sub> F <sub>LJL</sub>		53 20		Hz Hz	Notes 1,2 Notes 1,2
9	High Frequency Cutoff (3dB) Line to Junctor Junctor to Line	F <sub>HLJ</sub> F <sub>HJL</sub>		800 500		kHz kHz	Notes 1,2 Notes 1,2
10	Longitudinal Balance			65		dB	Note 1
11	Tip (or Ring) to ground AC input impedance	Z <sub>I</sub>		300		Ω	
12	Junctor output impedance	Z <sub>OJ</sub>		604		Ω	

Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied. ‡ Typical figures are at 25°C with nominal  $\pm$ 5V supplies and are for design aid only: not guaranteed and not subject to production testing. Note 1: 754 $\Omega$  connected between JUNCTOR (pin 16) and 0V. Note 2: 604 $\Omega$  connected between TIP (pin 1) and RING (pin 3).

## **DC Electrical Characteristics**

		Characteristics	Sym	Min	Typ <sup>‡</sup>	Max	Units	Test Conditions
1	SUP	Operating Supply Voltages	V <sub>A1</sub> ,V <sub>A2</sub> V <sub>B</sub> V <sub>C1</sub> ,V <sub>A2</sub>	-13 -30	-24	+13	V V V	
2	PLY	Operating Supply Currents	I <sub>A1</sub> I <sub>A2</sub> I <sub>B</sub> I <sub>C1</sub> I <sub>C2</sub>		7 8 6 .2 .1		mA mA mA mA	
3		High Level Input Voltage  MUTE  RC	V <sub>IH</sub>	4.2 3			V V	
4	N P U	Low Level Input Voltage  MUTE  RC	V <sub>IL</sub>	.8 1			V	
5	S	High Level Input Current  MUTE  RC	I <sub>IH</sub>	-28 700			μΑ μΑ	
6		Low Level Input Current  MUTE  RC	I <sub>IL</sub>	100 1			μΑ μΑ	
7	C 0	Sink Current  LED  RD	I <sub>LED</sub>	2 65	6 100		mA mA	V <sub>OFHK</sub> ,-6V CD=RC=5V,RGD=0V V <sub>RRD</sub> <1.5V
8	T P	Diode Clamp Current	I <sub>RLY</sub>	65	100		mA	RC=RGND=0V, CD=5V V <sub>RRD</sub> <1.5V
9	U	High Level Output Voltage	V <sub>OH</sub>	6			V	LED Unconnected
10	S	Low Level Output Voltage OFHK	V <sub>OL</sub>	-6.5			V	LED Unconnected
11		High Level Output Current	I <sub>OH</sub>	10			μΑ	
12		Low Level Output Current	I <sub>OL</sub>	10			μΑ	

<sup>‡</sup> Typical figures are at 25°C with nominal± 5V supplies and are for design aid only: not guaranteed and not subject to production testing.

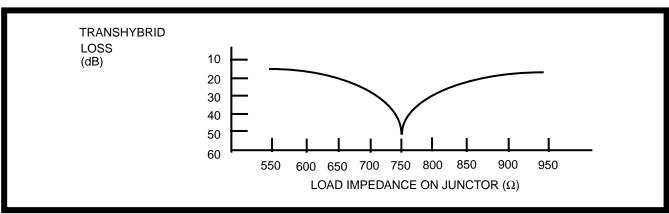


Figure 4 - Return Loss VS Junctor Load Impedance

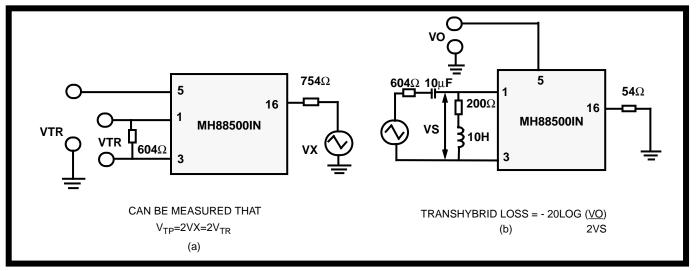


Figure 5 - Transhybrid Loss Test Circuit

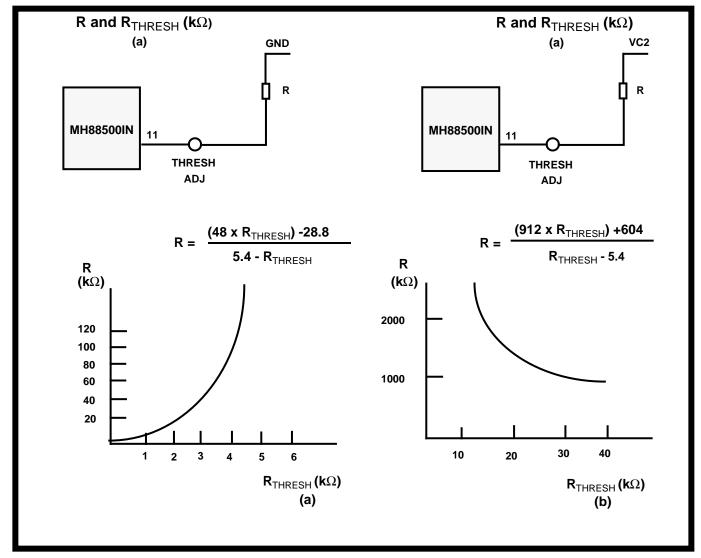


Figure 6 - Off-Hook Threshold Adjust

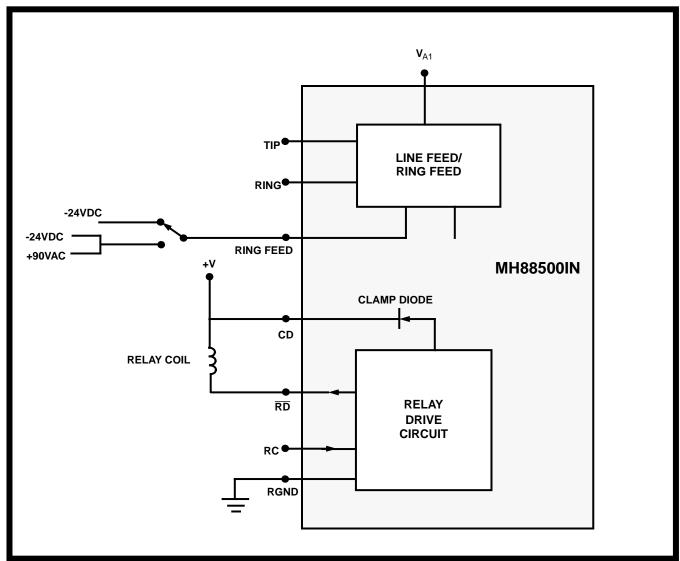


Figure 7 - Relay Drive Circuit

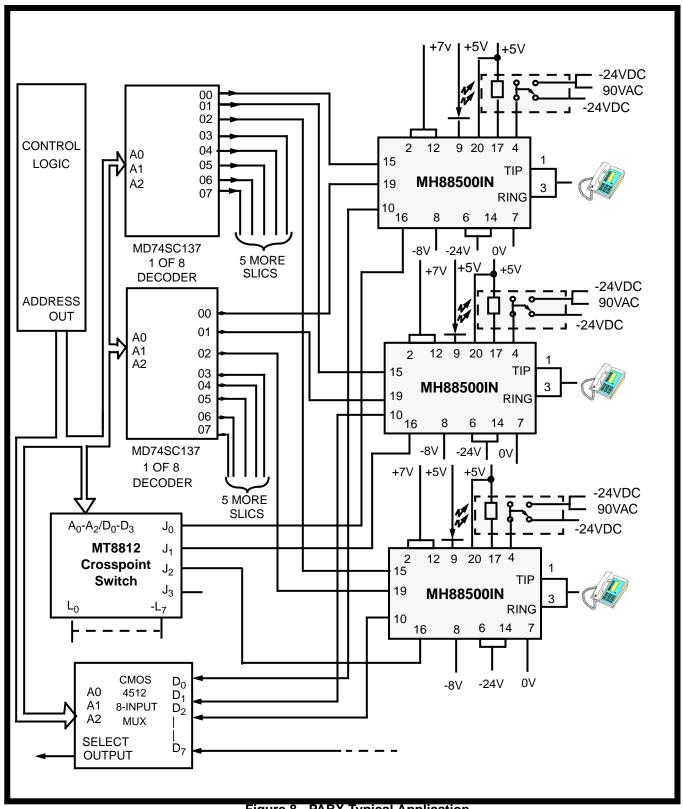


Figure 8 - PABX Typical Application

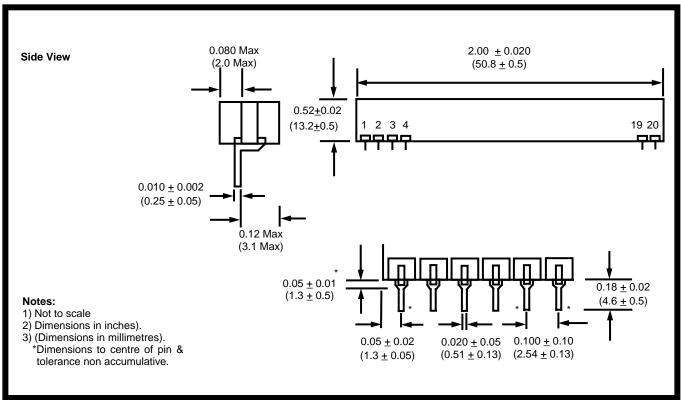


Figure 9 - Mechanical Data

Notes: