

GP2S40

Long Focal Distance, Ultra Compact **Type Photointerrupter**

■ Features

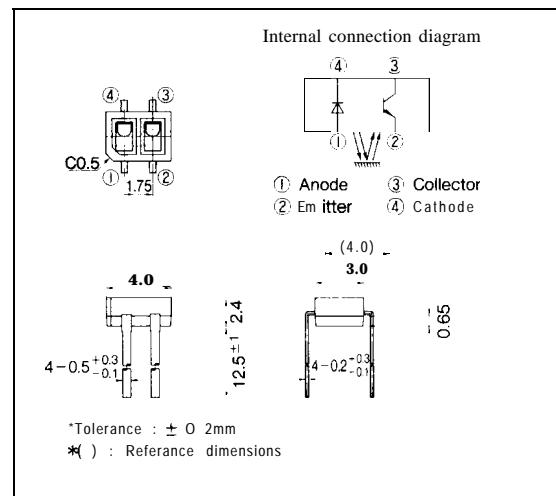
1. Ultra compact DIP package
(Volume : 1/3 of GP2S05)
2. Long focal distance type
(Detecting range : 3mm)
3. Effective detection distance : 1.5 to 6.5mm

■ Applications

1. Copiers
2. Facsimiles
3. Printers

■ Outline Dimensions

(Unit : mm)




■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	v
Output	Power dissipation	P _D	75	mW
	Collector-emitter voltage	V _{CEO}	35	v
	Emitter-collector voltage	V _{ECO}	6	v
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
	Total power dissipation	P _{tot}	100	mW
	operating temperature	T _{opr}	-25 to +85	°C
	Storage temperature	T _{sto}	-40 to +100	°C
	*! Soldering temperature	T _{sot}	260	°C

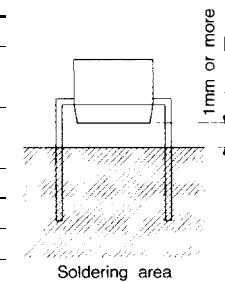*! For 5 seconds



■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =20mA		1.2	1.4	V
	Reverse current	I _R	V _R =3V		—	10	μA
Output	Collector dark current	I _{CEO}	V _{CE} =20V	—	1	100	nA
	Collector current	I _C	V _{CF} =5V, I _F =20mA	0.5	—	3.0	mA
Transfer characteristics	* ² Leak current	I _{LEAK}	V _{CE} =5V, I _F =20mA	—	—	500	nA
	* ³ Response time	t _r	V _{CE} =2V, I _C =100 μA		50	150	μs
		t _f	R _L =1000Ω, d=4mm		50	150	μs

*2 No reflective object

*3 "d" is glass thickness of reflective mirror.

Tact Arrangement of Collector Current

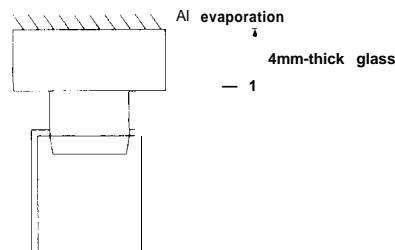


Fig. 1 Forward Current vs. Ambient Temperature

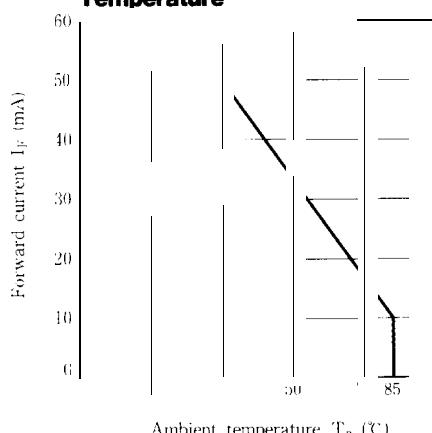


Fig. 2 Power Dissipation vs. Ambient Temperature

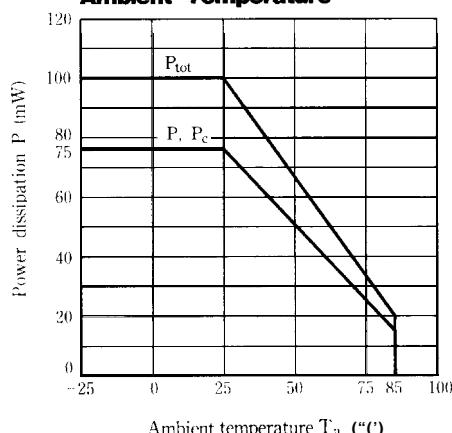



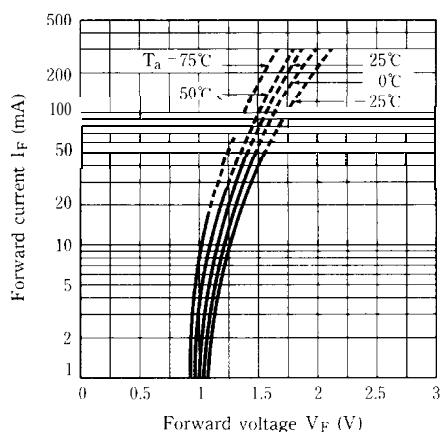
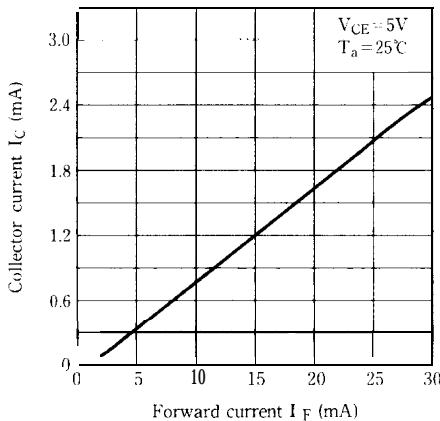
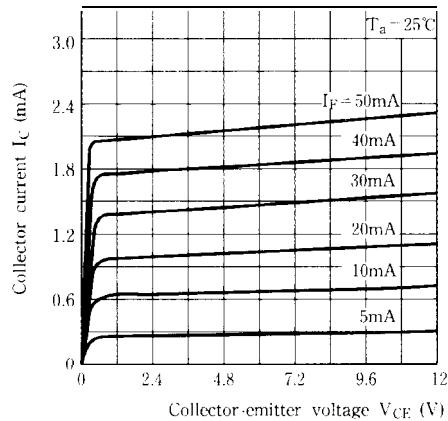
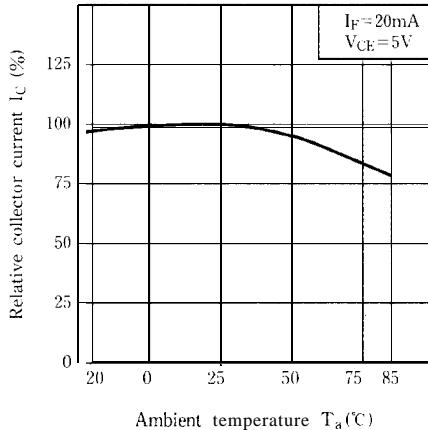
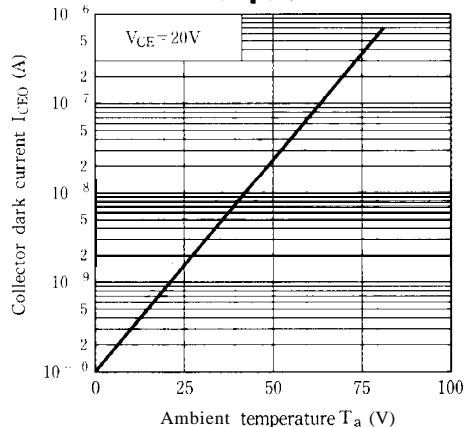
Fig. 3 Forward Current vs. **Forward** Voltage**Fig. 4** Collector current vs. Forward Current**Fig. 5** Collector Current vs. Collector-emitter Voltage**Fig. 6** Relative Collector Current vs. Ambient Temperature**Fig. 7** Collector Dark Current vs. Ambient Temperature

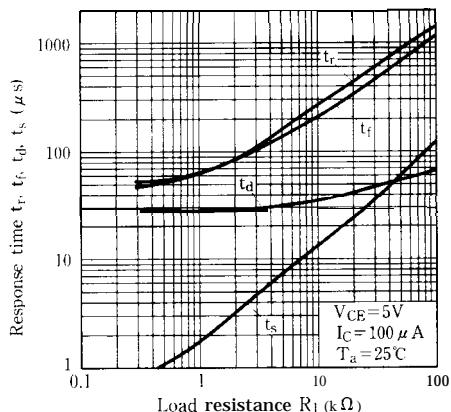Fig. 8 Response Time vs. Load Resistance



Test Circuit for Response Time

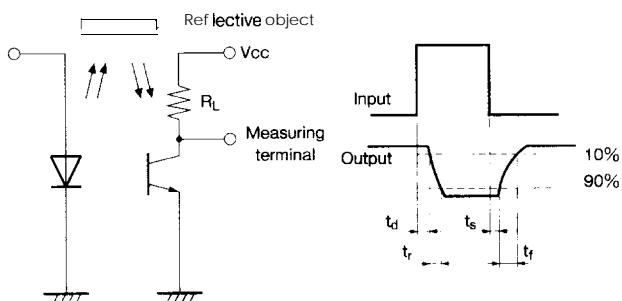


Fig. 9 Relative Collector Current vs. Shield Distance (1)


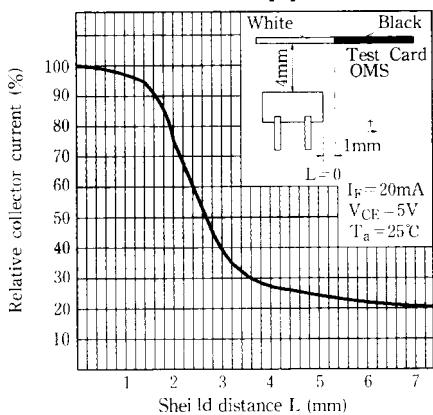


Fig.10 Relative Collector Current vs. Shield Distance (2)

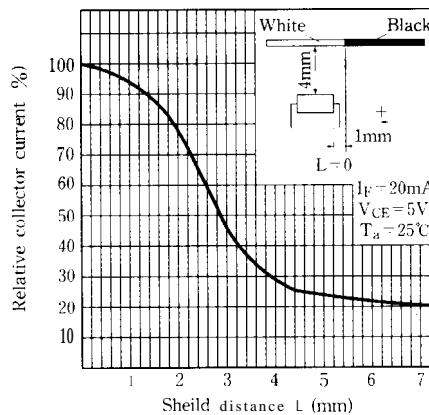

- Please refer to the chapter "Precautions for Use" (Page 78 to 93).