R-C Thermal Model Parameters

DESCRIPTION

The parametric values in the R-C thermal model have been derived using curve-fitting techniques. R-C values for the electrical circuit in the Foster/tank and Cauer/filter configurations are included. When implemented in P-SPICE, these values have matching characteristic curves to the single-pulse transient thermal impedance curves for the MOSFET.

These RC values can be used in the P-SPICE simulation to evaluate the thermal behavior of the MOSFET junction temperature under a defined power profile. These techniques are described in application note AN609, “Thermal Simulation of Power MOSFETs on the P-SPICE Platform”.

R-C THERMAL MODEL FOR TANK CONFIGURATION

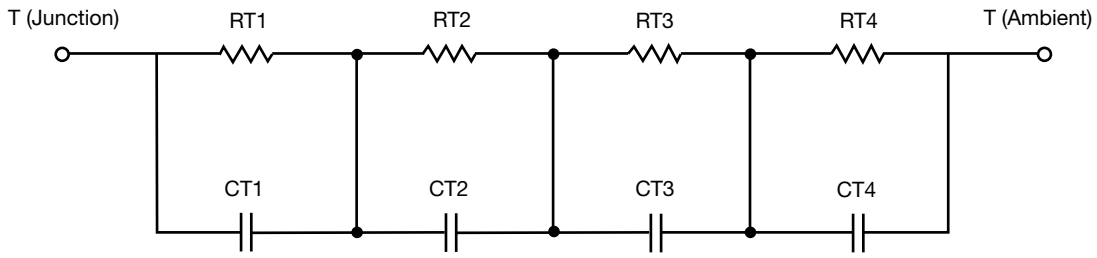

R-C VALUES FOR TANK CONFIGURATION			
THERMAL RESISTANCE (°C/W)			
Junction to	**Ambient**	**Case**	**Foot**
RT1	N/A	330.5306m	N/A
RT2	N/A	301.1065m	N/A
RT3	N/A	432.0500m	N/A
RT4	N/A	636.3129m	N/A
THERMAL CAPACITANCE (Joules/°C)			
Junction to	**Ambient**	**Case**	**Foot**
CT1	N/A	65.9304m	N/A
CT2	N/A	3.1082m	N/A
CT3	N/A	50.3095m	N/A
CT4	N/A	287.0807m	N/A

Note
N/A indicates not applicable

This document is intended as a SPICE modeling guideline and does not constitute a commercial product datasheet. Designers should refer to the appropriate datasheet of the same number for guaranteed specification limits.

R-C THERMAL MODEL FOR FILTER CONFIGURATION

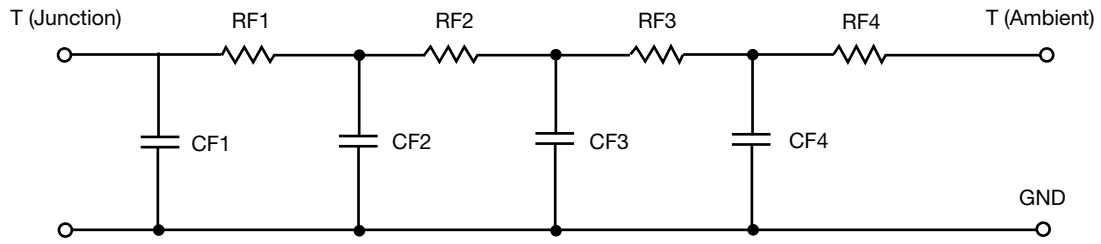

R-C VALUES FOR FILTER CONFIGURATION			
THERMAL RESISTANCE (°C/W)			
Junction to	**Ambient**	**Case**	**Foot**
RF1	N/A	210.4962m	N/A
RF2	N/A	584.9514m	N/A
RF3	N/A	422.4372m	N/A
RF4	N/A	482.1122m	N/A
THERMAL CAPACITANCE (Joules/°C)			
Junction to	**Ambient**	**Case**	**Foot**
CF1	N/A	1.6484m	N/A
CF2	N/A	12.8577m	N/A
CF3	N/A	30.7296m	N/A
CF4	N/A	329.2360m	N/A

Note
N/A indicates not applicable

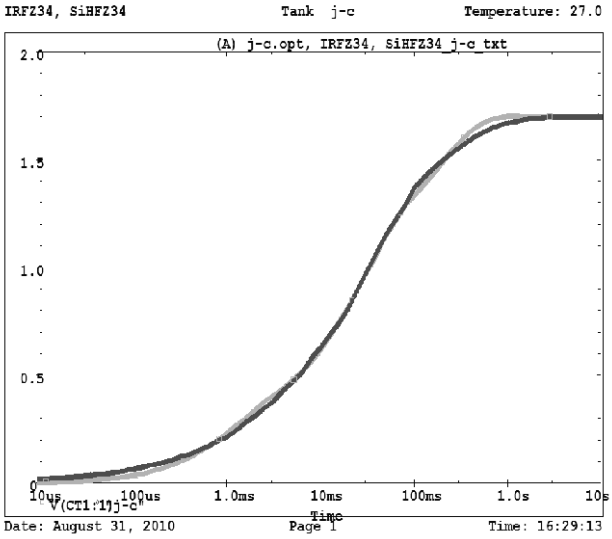
IRFZ34, SiHFZ34
Tank j-c
Temperature: 27.0
(A) j-c.opt, IRFZ34, SiHFZ34_j-c txt
2.0
1.5
1.0
0.5
0
10us
100us
1.0ms
10ms
100ms
1.0s
10s
V(CT1:1)j-c"
Time
Date: August 31, 2010
Page 1
Time: 16:29:13

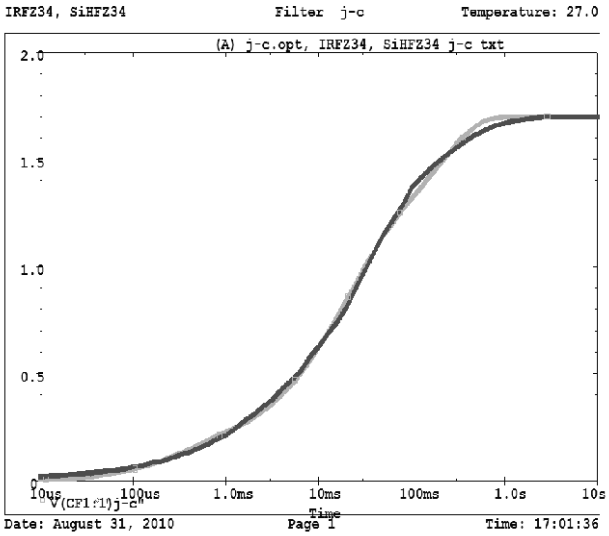
IRFZ34, SiHFZ34
Filter j-c
Temperature: 27.0
(A) j-c.opt, IRFZ34, SiHFZ34_j-c txt
2.0
1.5
1.0
0.5
0
10us
100us
1.0ms
10ms
100ms
1.0s
10s
V(CF1:1)j-c"
Time
Date: August 31, 2010
Page 1
Time: 17:01:36