

**MODEL:** GP605 / 555 / 605P


**SUBJECT:** Optional Counter for Large Size Counting

**Details: -**


The following parts can be obtained and fitted to enable A3 size copies/prints to be counted separately, thus enabling simple connection of computer accounting devices requiring an A3 pulse. Parts required:

- 1, Option Counter PCB FG2-5195-000
- 2, Cable FF2-8212-000
- 3, Counter FH6-3537-000
- 4, PCB mounts Available from RadioSpares.


(1) Mount the Option Counter PCB onto the door switch assembly as shown.

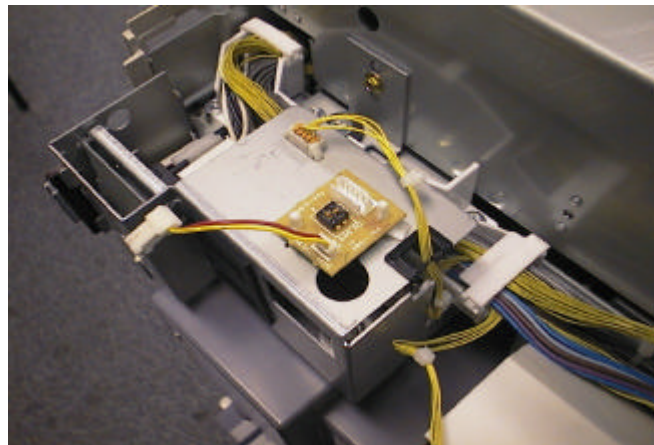

(2) Fit the option counter as shown.

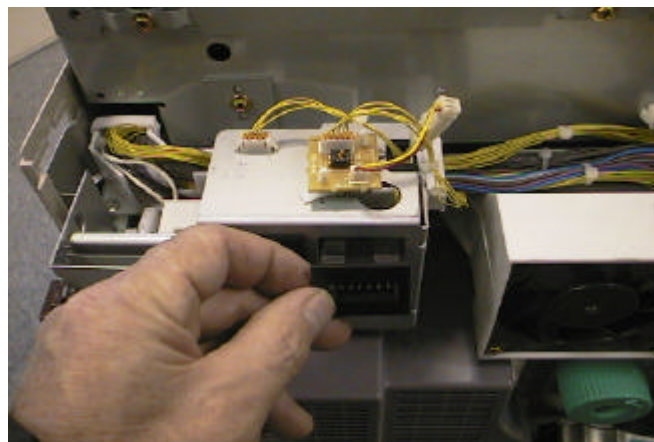

(3) Ensure that the switches are set as shown.

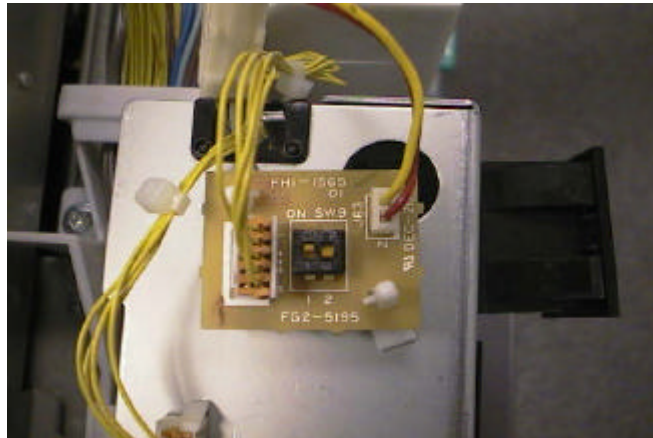

Refit control panel and covers and check operation of counter, large size copies or prints should now register on the option counter as well as the total counter.