

Icom IC PS-125 Service Manual

**Icom**  
**IC PS-125**  
**Service Manual**

Authors: Lawrence Young, K4LXV, Dick Knol PA3DUV

# Icom IC PS-125 Service Manual

## Brief operational description Of the Icom PS-125 power supply

### A. Primary DC supply

1. AC input voltage is applied through the AC switch, to input fuse F-1 and filters IF1, IF2, and associated capacitors C1-5, C24 & C25, through R-2 to the primary rectifier array D-1. Triac Q-1 which is connected across R-2 conducts once the switching supply starts, thus limiting the voltage drop across R-2. A movable jumper from D-1 to the junction of C-9 & C-10 configures the primary supply for 110 volt operation only. **For 220 volt operation this jumper is not connected.** The +310 volt DC output voltage of D1 is connected through L2, & D2 to series connected electrolytic capacitors C-9 & C-10 which filter the DC output voltage of D-1.

### B. Switching supply

1. The output of the primary 310V DC supply is now applied to series connected power FETs Q4 & Q5 and the primary of high frequency transformer T-1. The gates of Q4 & Q5 are driven by Switch mode controller IC, HC-1. Upon initial power application, Q4 or Q5 will conduct first, thus causing an ac output voltage on all secondary windings of T-1. The voltage of T-1 pins 7 & 8 is rectified by D-8, regulated by D-9 & Q-6 and applied to HC-1 pin 12(vcc) to operate HC-1. The voltage from T-1 pins 9 & 10 is rectified by D23, & filtered by C40 to supply voltage for all IC's and transistors except HC-1. HC-1 now begins operating and alternately drives Q4 & Q5 at a high AC frequency.

### C. Secondary DC supply


1. T-1 secondary windings pins 12 & 13, 16 & 17, 14 & 15, 10 & 11 and fast recovery diodes B 11, 12, & 13, 14, along with electrolytic capacitors C31, 32, 33, 34, & 35 form the 25 amp 13.8 volt DC output supply. The output is applied to the output terminals through L-12 & L-13.
2. The 13.8Volt DC output is sensed via R-58 to the base of Q-11, the collector of which drives opto- isolator PC-1. Adjustment of VR-11 adjusts the base voltage of Q-11 thus establishing via HC-1, the power supply DC output voltage.
3. IC-11 pins 1, 2, & 3 sense the voltage drop across R-31 & R-32 via VR-12 and R-44, to establish via the adjustment of VR-12, the maximum output current limit.
4. Zener diode D-26, Q13, R-48, R-49, PC-2 and associated components detect an over voltage condition of the 13.8 volt supply output.
5. IC-11, pins 5, 6, & 7, Q-14 & associated components sense temperature rise inside the supply and turn on the fan as appropriate.

## Icom IC PS-125 Service Manual

### PS-125 parts list


| Item         | Description                               | Qty ea. |
|--------------|---|---------|
| Q1           | TM1641S-L Triac                           | 1       |
| Q2           | 2SC4002 NPN transistor                    | 1       |
| Q3, 12       | DTC 114E digital transistor               | 2       |
| Q4, 5        | FS22SM-9 Power Mosfet transistor          | 2       |
| Q6           | 2SC3246                                   | 1       |
| Q13          | 2SA733 pnp transistor                     | 1       |
| Q11,14       | 2SC945 npn transistor                     | 2       |
| HC-1         | WB 2013A switching controller IC          | 1       |
| IC 1         | S80745                                    | 1       |
| IC 11        | LM2904 dip op amp                         | 1       |
| IC 12        | 431-                                      | 1       |
| PC 1, PC 2   | PS2561 opto isolators                     | 2       |
| D1           | RBV1506 Bridge rectifier                  | 1       |
| D2,3,25,26   | 15 volt ½ w zener diode                   | 4       |
| D4,5,6       | Iss 270A diode                            | 3       |
| D10,11       | Diode                                     | 2       |
| D23          | CRA91-D2 diode                            | 1       |
| D24          | 7 volt zener diode                        | 1       |
| B11,12,13,14 | D2ZKC060N04 fast recovery power diode     | 2       |
| Fuse F1      | 10A (120V) 5A (230V)                      | 1       |
| R2           | 6.5 ohm power resistor with build in fuse | 1       |

Icom IC PS-125 Service Manual

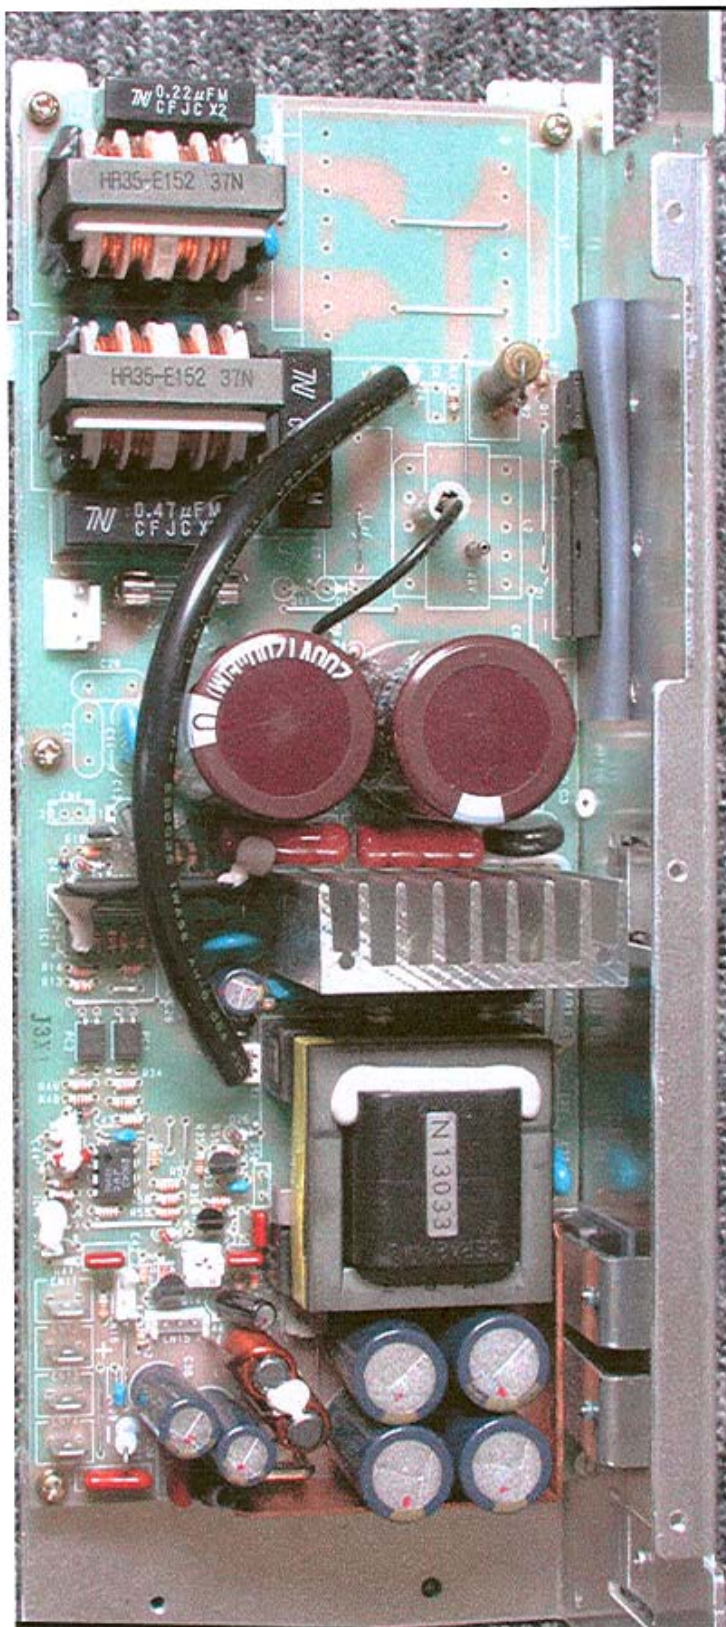


Authors: Lawrence Young, K4LXV, Dick Knol PA3DUV

# Icom IC PS-125 Service Manual

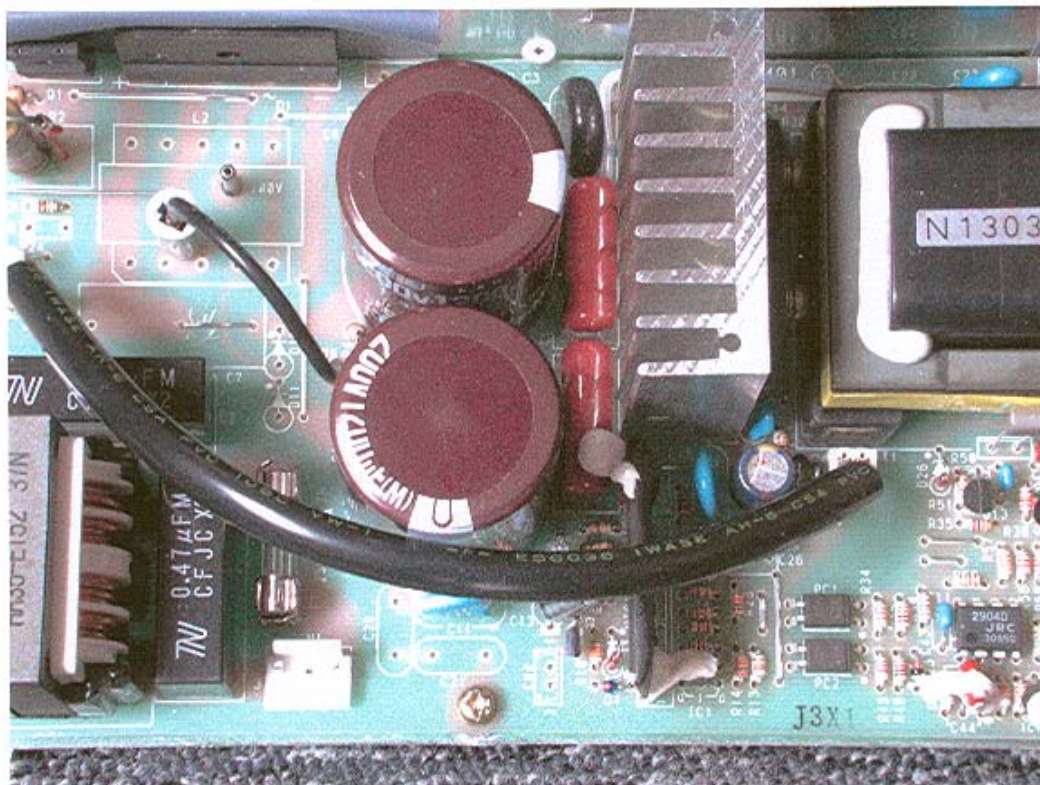


110-220 V jumper detail

Icom IC PS-125 Service Manual

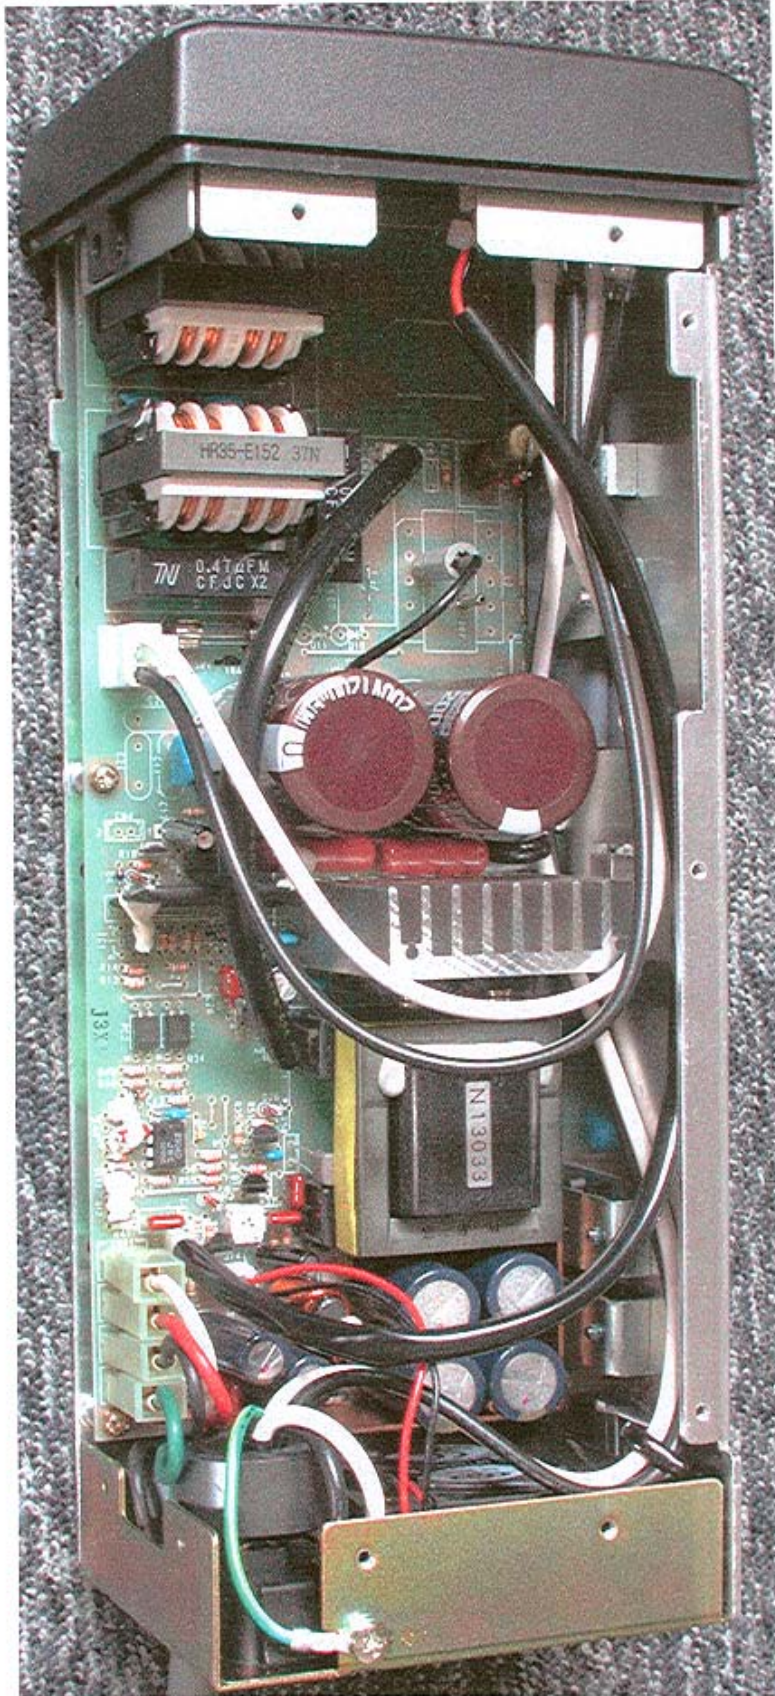

Authors: Lawrence Young, K4LXV, Dick Knol PA3DUV

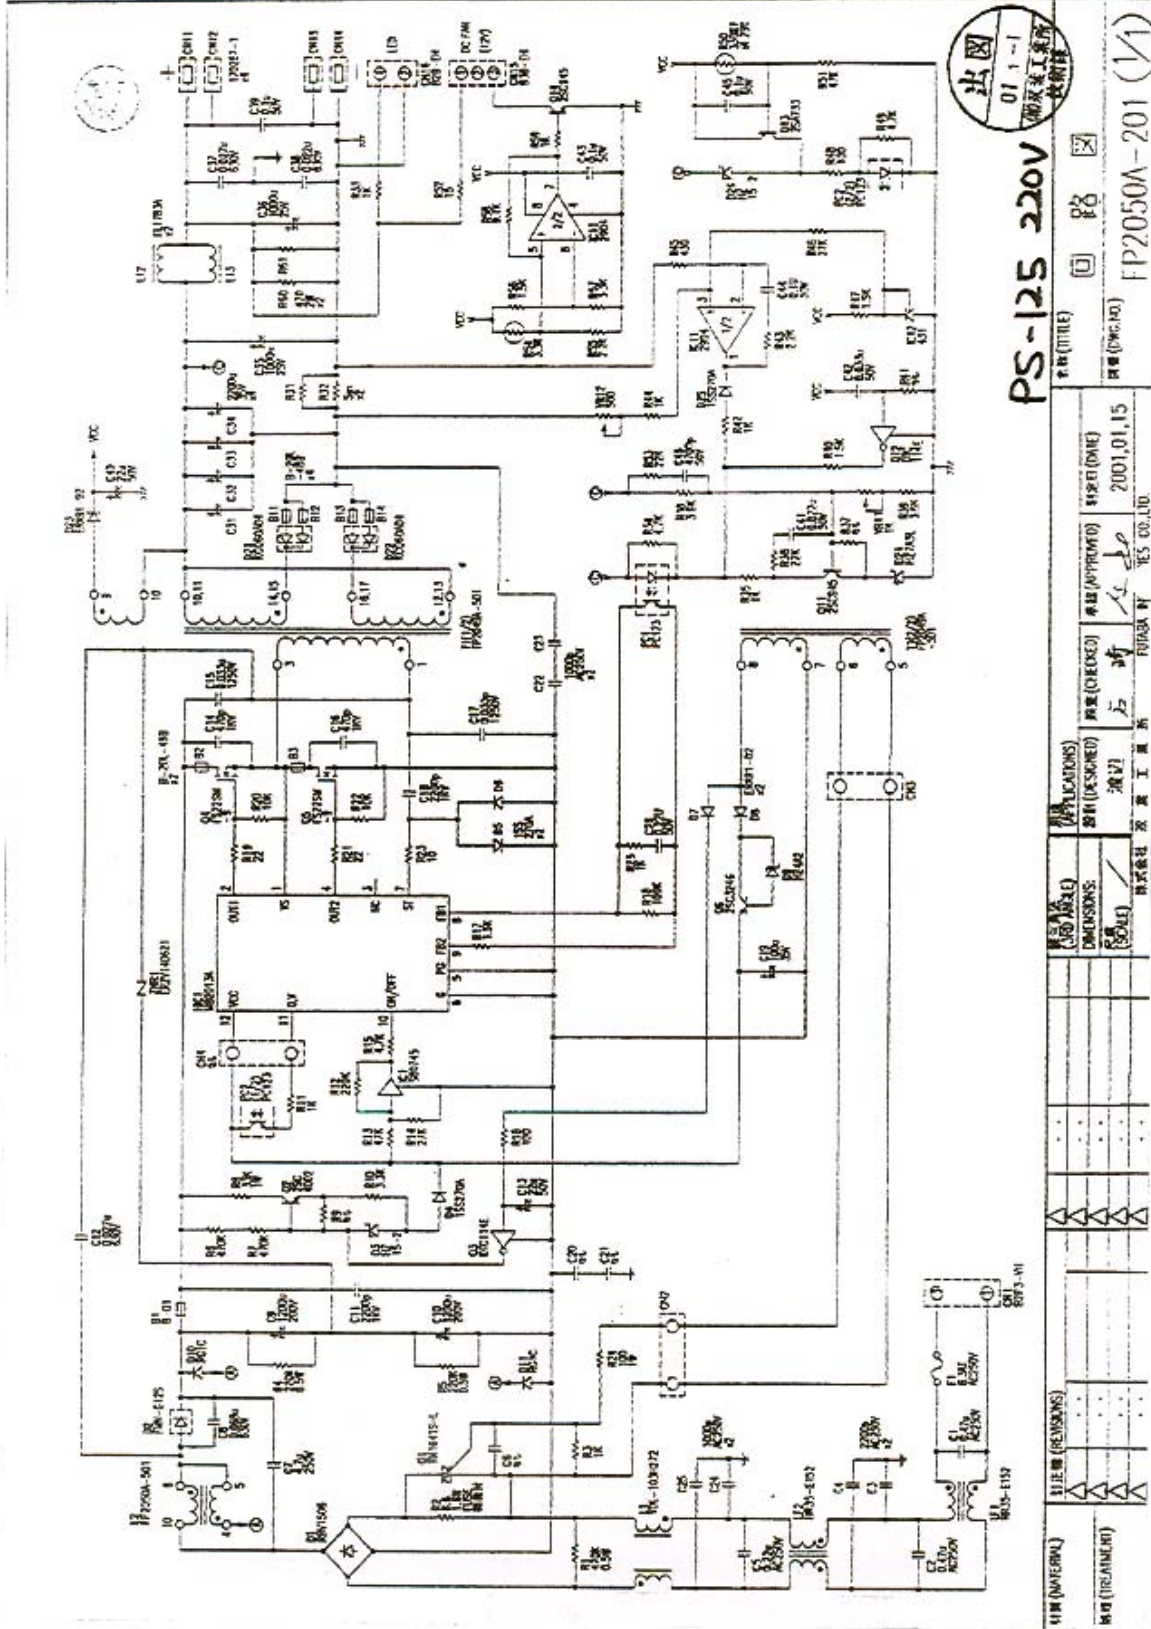

出図  
01-1-1  
7000系工業部  
技術課

PS-125 220V  
機種(型番): FP2050A-201 (1/1)

|                |                |                |                |                |                |                |                |                |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  | 仕様(REFERENCE)  |
| 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) | 寸法(DIMENSIONS) |
| 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   | 材料(MATERIAL)   |
| 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    | 製造(FACTORY)    |
| 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    | 検査(CHECKED)    |
| 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) | 承認(AUTHORIZED) |
| 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     | 設計(DESIGN)     |
| 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     | 2001.01.15     |
| 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      | 富士通工業株式会社      |

Authors: Lawrence Young, K4LXV, Dick Knol PA3DUV