

Technical Note

PROwatt

512-0037-01-01 Rev 1


Operating Air Conditioners or Refrigerator Compressors

Overview

We do not have specific model test data regarding compressors. However, it appears there is considerable variation in start surge from model to model of air conditioner or fridge compressors. In our experience the newer small rooftop-style air conditioners (5000–7000 BTU) used on RVs in some cases actually draw only 8 amps running (with moderate start surge), and can usually be operated by a PW1500. The older models may not be as efficient, and may draw a much higher surge, causing even a PW1500 to trip into overload. The PW2500 inverter in most cases can operate air conditioning units up to 11 A/10,000 BTU. The DC wiring and battery capacity must be optimal to provide the large start surge without starving the inverter of power during a surge.

A three-foot-high, bar-style fridge, which draws up to 2.5 A, in most cases can be run by a PROwatt 800. Full height fridge rated from 2.5–5 A can usually be operated by the PW1500. The PW2500 would be more suitable to operate compressors up to 5–8 A.

The compressor amp/watt rating does not tell the whole story. The compressor spec plate rating is usually the max running draw. The start surge can range far higher; the rule of thumb is 5–10 times the spec plate rating. If the compressor demands more surge than the inverter can provide, the inverter would go into overload and shut down the AC output until the overload is removed, and the inverter reset (switch off, then on again). In a borderline situation (i.e. inverter surge capacity is just short of compressor surge demand) the addition of an inductor, or filter choke of 5 mHenry/10–30 amp rating may be sufficient to buffer the surge spikes and get the compressor started. The inductor would be wired in series in the hot lead between inverter AC output and load/compressor (see diagram below). The start surge typically lasts less than two seconds until the motor's magnetic field and motor impedance rises, which lowers the current demand from the inverter to a manageable level for continuous running.

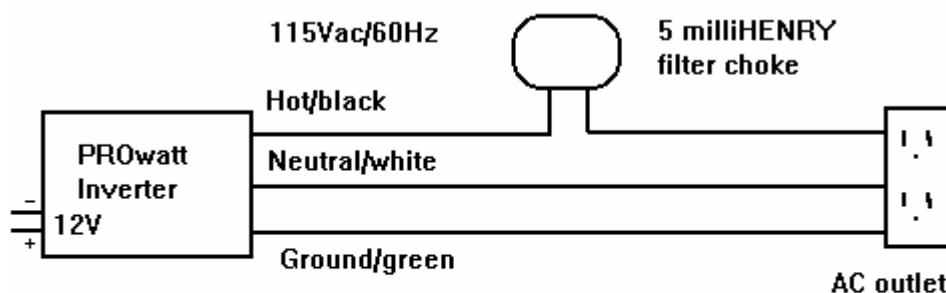

Hammond makes a 5milliHenry filter choke part number 195G20 available at Electrosonic (Canada) 1800 567 6642, or Newark Electronics (USA) 1800 463 9275.

PROwatt is a trademark of Xantrex International. Xantrex is a registered trademark of Xantrex International.
© 2001 Xantrex International. All rights reserved.

Technical Note: *Air Conditioner/Fridge Compressors - PROwatt*© September 1997 Xantrex International

UNLESS SPECIFICALLY AGREED TO IN WRITING, XANTREX TECHNOLOGY INC. ("XANTREX"):

(a) MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED IN ITS MANUALS OR OTHER DOCUMENTATION.

(b) ASSUMES NO RESPONSIBILITY OR LIABILITY FOR LOSS OR DAMAGE, WHETHER DIRECT, INDIRECT, CONSEQUENTIAL OR INCIDENTAL, WHICH MIGHT ARISE OUT OF THE USE OF SUCH INFORMATION. THE USE OF ANY SUCH INFORMATION WILL BE ENTIRELY AT THE USER'S RISK.

Part number: 512-0037-01-01 Rev 1

Contact information:

Phone: 1-800-670-0707 (toll-free in North America)

Phone: 1-604-422-2777 (direct)

Fax: 1-604-420-2145 (direct)

Email: CustomerService@xantrex.com

Web: www.xantrex.com