microwave JOURNAL
EURO-GLOBAL EDITION

APRIL 2000
VOL. 43, NO. 4

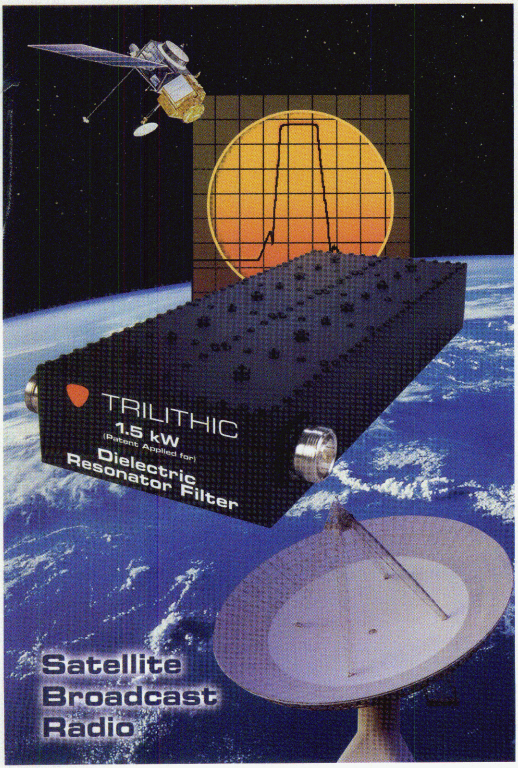


AMPLIFIERS AND OSCILLATORS

A 2.45 GHz Low Cost, High Performance VCO

Increasing Multitone Power Near Saturation

A Digitally Compensated TCXO with Low Phase Noise

CONTENTS, p. 10

horizon house




**Someone once said, "I want a cell phone that costs less." And you've been paying for it ever since.** They expect you to cut costs without cutting corners. Easy for them to say, right? Here's where Agilent Technologies can help. We've already designed the next-generation wireless mobile manufacturing test solutions. We call it doing our job. You'll call them a lifesaver.

Why? For starters, these solutions are from the industry leader in cellular manufacturing test. And they're faster than ever. So you can speed through test. Plus improve test margins and yield with greater accuracy. Which means you'll get more phones out the door—at a lower cost than ever before. Not to mention being able to reconfigure tests quickly and easily for all your new designs.

Want to start reducing your test costs right away? Visit our web site. Or give us a call at one of the numbers listed below. And we'll help make it happen. Suddenly that dream of cutting costs looks like a reality.

www.agilent.com/find/wireless

**Agilent Technologies**
Innovating the HP Way

Argentina (54 1) 787-7115 • Austria (01) 25000-7006 • Australia 1 800 629 485 • Belgium (32/2) 778-34-17 • Brazil (55-11) 7297-8600 • Canada 1-877-894-4414 • Czech Republic (420) 2 61307111 • Denmark (45) 45 99-10-09 • Finland (3589) 8872 2100 • France (01) 69 29 41 14 Germany (0180) 524-6330* • Greece (30/1) 7264045 • Hong Kong (852) 2599 7889 • Hungary (36) 1 4618111 • India (91 11) 690 6156 • Ireland (01) 615 8222 • Israel 972 (03) 538-00-80 • Italy (39 02) 92-122-241 • Japan (81/3) 3331-6111 • Korea (82 2) 769 0800 Malaysia 1 800 88 8848, (6 03) 291 0213 • Mexico 525-5-258-4294 • Netherlands (020) 547 7272 • Norway (47) 22 73 57 59 • Philippines (632) 814 1083 • Poland (48) (022) 6087700 • PRC 800 810 0189, (86 10) 6564 5238 • Singapore 1800 375 8100 Spain (34) 91 631 1323 Sweden (46/8) 444 22 77 • Switzerland (01) 735 72 36 • Taiwan 080 212 535, 0800 47866 press 1 • Thailand (66 2) 661 3999, (088) 225 802 • United Kingdom (01344) 366666 • Venezuela (58-2) 207-8357 * Telephone Charge per Unit Time = 0.24 DM/Min

©2000 Agilent Technologies TMSK0939/INTL

**CIRCLE 4 ON READER SERVICE CARD**

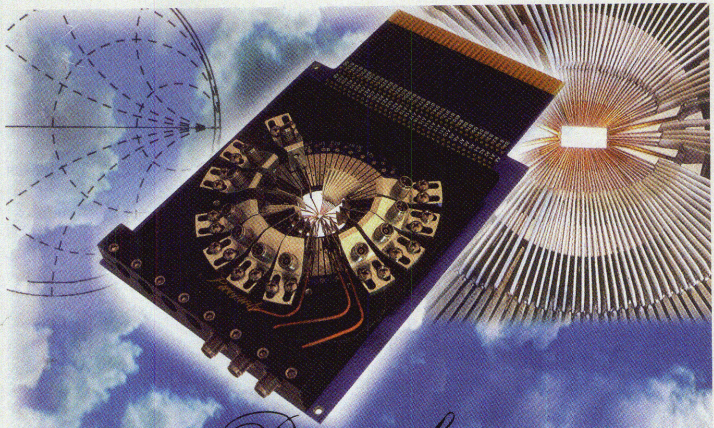

# Picoprobe®

## Picoprobe elevates probe cards to a higher level...

## (...110 GHz to be exact.)

For 17 years GGB Industries, Inc., has blazed the on-chip measurement trail with innovative designs, quality craftsmanship, and highly reliable products. Our line of custom microwave probe cards continues our tradition of manufacturing exceptional testing instruments.



Not only do you get all the attractive features mentioned, but you get personal, professional service, rapid response, and continuous product support--all at an affordable price so your project can be completed on time and within budget.

| Typical Specs | 10GHz | 20GHz | 40GHz |
|---|---|---|---|
| Insertion Loss | 0.6 dB | 0.8 dB | 1.3 dB |
| Return Loss | 22 dB | 18 dB | 15 dB |



Our patented probe structures provide the precision and ruggedness you require for both production and characterization testing. And, only Picoprobe® offers the lowest loss, best match, low inductance power supplies, and current sources on a single probe card.

Our proven probe card design technology allows full visibility with inking capability and ensures reliable contacts, even when probing non-planar structures.



Through unique modular design techniques, hundreds of low frequency probe needles and a variety of microwave probes with operating frequencies from DC to 40, 67, or even 110 GHz can be custom configured to your layout.

For technical assistance, custom product designs, or off-the-shelf delivery, call GGB Industries, Inc., at (941) 643-4400.

**GGB INDUSTRIES, INC. • P.O. BOX 10958 • NAPLES, FL 34101**

Telephone (941) 643-4400 • Fax (941) 643-4403 • E-mail email@ggb.com • www.picoprobe.com

# THE WORLD'S LARGEST SELECTION

# POWER SPLITTERS/ COMBINERS

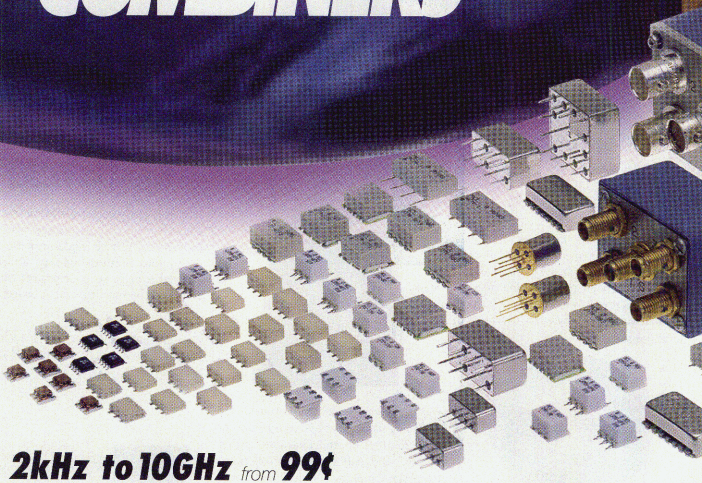

## 2kHz to 10GHz *from* 99¢

Choose from over 550 standard off-the-shelf models from 2way and 3way to 48way; 0°, 90°, and 180°; 50 and 75 ohms covering 2kHz to 10GHz. Mini-Circuits will also supply your special needs and custom designs such as wider bandwidths, higher isolation, lower insertion loss and phase matched ports...all at catalog prices with rapid turnaround time. Case styles include surface mount, plug-in, flat pack, and coaxial connectorized... and custom case styles are no problem! Super-miniature and ultra-low profile surface mount units provide excellent solutions in cellular communications, cable systems, and countless wireless applications. And all units come with a 1 year guarantee and skinny 4.5 sigma performance repeatability unit-to-unit and production run to production run. Add fast delivery, unsurpassed applications support and value pricing, and the decision is easy. Call Mini-Circuits today!

***Mini-Circuits...we're redefining what VALUE is all about!***

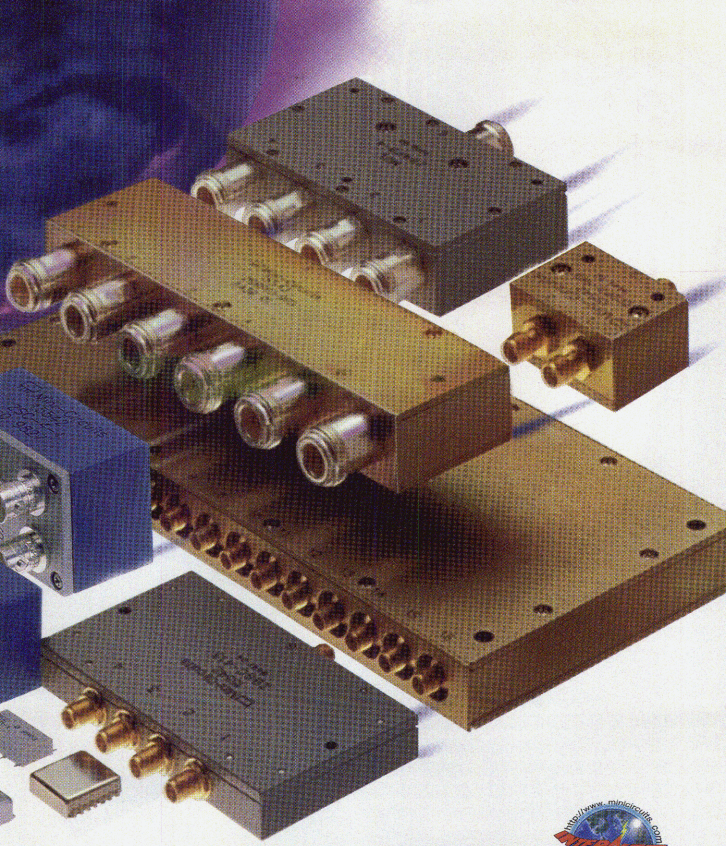

see us on the web
http://www.minicircuits.com




# Mini-Circuits®

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *INTERNET* http://www.minicircuits.com

US 82 INTL 83 CIRCLE READER SERVICE CARD

For detailed specs on all Mini-Circuits products refer to • 760- pg. HANDBOOK • INTERNET • THOMAS REGISTER • MICROWAVE PRODUCT DATA DIRECTORY • EEM

**ISO 9001** CERTIFIED

F 194 Rev B

# 3G Design In Build Out

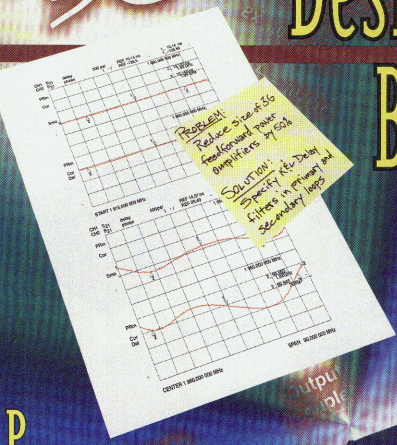





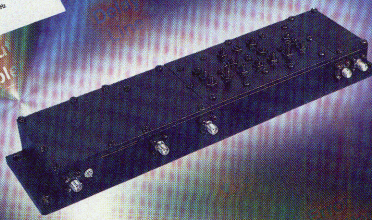

Primary loop delay filter assemblies integrate high power cavity delay filters, couplers and isolators into a single compact module for performance improvement, space savings and cost reduction.

Secondary loop miniature delay filters utilize a Patent Pending topology to provide delay equalization. The filters exhibit excellent delay and phase flatness in a miniature surface mount package. The 3G model measures a mere 1.5"L x 0.60"W x 0.4"H and can be mounted directly onto your PWB with pick and place machinery.






**Order On-Line**

New! Buy K&L Filters over the web

www.klmicrowave.com

**USA**
Phone: 410-749-2424
FAX: 410-749-2788

**EUROPE**
Phone: 44-(0)-1262 605500
FAX: 44-(0)-1262 605504

www.klmicrowave.com • E-mail: wireless@klmicrowave.com

K&L MICROWAVE INCORPORATED®

# NEW ERA AMPLIFIERS




**WOW!** **DC to 8GHz** *(up to +18.5dBm output)* From **$1.19** (1000 qty.)

Mini-Circuits ushers-in a new era of technology and economy with ERA monolithic GaAs amplifiers. Just check the specs! These surface mount and drop-in amplifiers cover your applications to 8GHz with higher gain, more output, and flatter response. Characterized with S-parameter data, these amplifiers are very easy to use. Simply sketch an interconnect layout, and the design is done. And ERA's are engineered with wider bandwidths to eliminate your need for costly compensation networks and extra gain stages. So, review your present design and replace with Mini-Circuits new ERA technology. Lower overall cost, wide bandwidth, and lots to...*gain!*

***Mini-Circuits...we're redefining what VALUE is all about!***

| Model | *Freq. (MHz) | Gain (dB) | Max. Power Out (dBm, @ 1dB Comp) | Dynamic Range NF(dB) | IP3(dBm) | @Device Current(mA) | $Price $ ea. (10 Qty.) |
|---|---|---|---|---|---|---|---|
| ERA-1 | DC-8000 | 11.8 | 11.7 | 5.3 | 26.0 | 40 | 1.90 |
| ERA-1SM | DC-8000 | 11.8 | 11.3 | 5.5 | 26.0 | 40 | 1.85 |
| ERA-2 | DC-6000 | 15.6 | 12.8 | 4.7 | 26.0 | 40 | 1.95 |
| ERA-2SM | DC-6000 | 15.2 | 12.4 | 4.6 | 26.0 | 40 | 2.00 |
| ERA-3 | DC-3000 | 20.8 | 12.1 | 3.8 | 23.0 | 35 | 2.10 |
| ERA-3SM | DC-3000 | 20.2 | 11.5 | 3.8 | 23.0 | 35 | 2.15 |
| ERA-4 | DC-4000 | 13.5 | ▲17.0 | 5.5 | ▲32.5 | 65 | 4.15 |
| ERA-4SM | DC-4000 | 13.5 | ▲16.8 | 5.2 | ▲33.0 | 65 | 4.20 |
| ERA-5 | DC-4000 | 18.6 | ▲18.4 | 4.5 | ▲33.0 | 65 | 4.15 |
| ERA-5SM | DC-4000 | 18.5 | ▲18.4 | 4.3 | ▲32.5 | 65 | 4.20 |
| ERA-6 | DC-4000 | 11.3 | ▲18.5 | 8.4 | ▲36.5 | 70 | 4.15 |
| ERA-6SM | DC-4000 | 11.3 | ▲17.9 | 8.4 | ▲36.0 | 70 | 4.20 |

Note: Specs typical at 2GHz, 25°C. Exception ▲ indicates typ. numbers tested at 1GHz.
* Low frequency cutoff determined by external coupling capacitors.
① Price (ea.) Qty.1000: ERA-1 $1.19, -2 $1.33, -3 $1.48, -4, -5 or -6 $2.95. SM option same price.

***DESIGNER'S AMPLIFIER KITS:***
K1-ERA: 10 of each ERA-1,-2,-3 (30 pieces) only $49.95
K1-ERASM: 10 of each ERA-1SM,-2SM,-3SM (30 pieces) only $49.95
K2-ERA: 10 of each ERA-4,-5 (20 pieces) only $69.95
K2-ERASM: 10 each ERA-4SM,-5SM (20 pieces) only $69.95
K3-ERASM: 10 each ERA-4SM,-5SM,-6SM (30 pieces) only $99.95

***Chip Coupling Capacitors at 1Ωs each (50 min.)***

| Size (mils) | Value |
|---|---|
| 80x50 | 10, 22, 47, 68, 100, 220, 470, 680, 1000, 2200, 4700, 6800, 10,000 pf |
| 120x50 | .002, .047, .068, .1 µf |




***Free User Guide!***
Packed with comprehensive technical support. Shipped with order, or call for your free copy today.







**Mini-Circuits®**

US 84 INT'L 85
CIRCLE READER SERVICE CARD

P.O Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718)332-4661 ***INTERNET*** http://www.minicircuits.com
For detailed specs on all Mini-Circuits products refer to • 760- pg. HANDBOOK • INTERNET • THOMAS REGISTER • MICROWAVE PRODUCT DATA DIRECTORY • EEM

ISO 9001 CERTIFIED

F 214 Rev E

# EXCELLENCE



# Innovation

JFW has designed and manufactures over 1200 different programmable attenuators. Features include wide attenuation ranges, optional step sizes, various package styles and connector options to provide system designers the flexibility required in today's global market.

- ***New*** DC-2500 MHz Low Cost/High Performance series
- Solid-State, wide band models
- Models with frequency ranges up to 5Ghz
- GPIB controlled models available
- 50 and 75 ohm impedances available


## JFW Industries, Inc.

5134 Commerce Square Drive • Indianapolis, Indiana 46237
***Tele.*** (317) 887-1340 ***Fax*** (317) 881-6790

***Internet–*** http://www.jfwindustries.com
***E-mail–*** sales@jfwindustries.com
***ISO 9001 Certified***


**CIRCLE 59 ON READER SERVICE CARD**

NEW FROM MAURY

# QT3.5mm™ Quick Test Connectors & Adapters*

- Excellent Repeatability/ Low VSWR
- Quick & Easy Push-On/ Pull-Off Design
- Guide Sleeve Design For Automated Applications
- Designed for Long Life

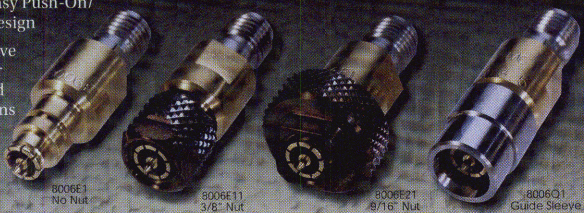


## ELECTRICAL SPECIFICATIONS

| MODEL | FROM | TO | FREQ RANGE (GHz) | VSWR (GHz) |
|---|---|---|---|---|
| 8006E1 | QT3.5mm™ (m) with no nut | 3.5mm (f) | DC — 26.5** | DC — 16.0 1.05<br>16.0 — 26.5 1.08 |
| 8006E11 | QT3.5mm™ (m) with 3/8" dia. nut | 3.5mm (f) | | |
| 8006E21 | QT3.5mm™ (m) with 9/16" dia. nut | 3.5mm (f) | | |
| 8006Q1 | QT3.5mm™ (m) with guide sleeve | 3.5mm (f) | | |

**Slightly reduced VSWR specifications to 34 GHz.

## REPEATABILITY

| REPEATABILITY | DC — 18.0 GHz | 18.0 — 26.5 GHz |
|---|---|---|
| Push-On Mode | > 45 dB | > 40 dB |
| Torque Mode | > 50 dB | > 50 dB |
| Hand Torque | > 50 dB | > 50 dB |

*Other available configurations include:*
- *7mm*
- *TYPE N (f & m)*
- *NMD3.5mm (f)*
- *NMD2.4mm (f)*

ALSO AVAILABLE FROM MAURY

# In-Series Precision Adapters

- Low VSWR / Low Loss
- DC to 50 GHz
- Minimize VNA Test Port Wear
- Phase Matched / Minimum Length
- Bulk Head & Panel Mount Configurations Available
- Between-Series Adapters Are Also Available




## ELECTRICAL SPECIFICATIONS

| MODEL | FROM | TO | FREQ RANGE & MAX. VSWR |
|---|---|---|---|
| 7921A | 2.4mm Q (f) | 2.4mm Q (f) | DC — 26.5 GHz, 1.06 |
| 7921B | 2.4mm Q (f) | 2.4mm Q (m) | 26.5 — 40.0 GHz, 1.10 |
| 7921C | 2.4mm Q (f) | 2.4mm Q (m) | 26.5 — 34.0 GHz, 1.15 |
| 8714A1 | 2.92mm K (f) | 2.92mm K (f) | DC — 4.0 GHz, 1.05 |
| 8714B1 | 2.92mm K (m) | 2.92mm K (m) | 4.0 — 20.0 GHz, 1.08 |
| 8714C1 | 2.92mm K (f) | 2.92mm K (m) | 20.0 — 40.0 GHz, 1.12 |
| 8021A2 | 3.5mm (f) | 3.5mm (f) | DC — 18.0 GHz, 1.05 |
| 8021B2 | 3.5mm (m) | 3.5mm (m) | 18.0 — 26.5 GHz, 1.08 |
| 8021C2 | 3.5mm (f) | 3.5mm (m) | 26.5 — 34.0 GHz, 1.12 |

*Between-Series configurations include:*
- *2.4mm to 2.92mm (K)*
- *2.4mm to 3.5mm*

*U.S. Patent Pending


MAURY MICROWAVE CORPORATION
2900 Inland Empire Blvd., Ontario, CA 91764 USA

For more information contact our SALES DEPARTMENT at
Tel: (909)987-4715 • Fax: (909) 987-1112
Email: maury@maurymw.com

Visit us on the World Wide Web at
http://www.maurymw.com

microwave JOURNAL®

APRIL 2000 • VOL. 43, NO. 4

# FEATURES

## TECHNICAL FEATURES

**22 A 2.45 GHz Low Cost, High Performance VCO**

*Jim Carlini, Detection Systems*

Performance and cost issues associated with voltage-controlled oscillator design

**70 A GSM EDGE Error Vector Magnitude Estimation Platform for RFIC/ASIC Evaluation**

*Ashkan Mashhour and Assaad Borjak, Nokia Networks*

Error vector magnitude measurements for Enhanced Data Rate for GSM Evolution (EDGE) designs and the need to perform such evaluations according to the standard specifications

**84 The Effect of Imperfect Antenna Cross-polar Performance on the Diversity Gain of a Polarization-diversity Receiving System**

*Brian S. Collins, CSA Wireless*

A statistical technique that simulates coupling between channels and quantifies the effect of cross-polar coupling as a function of the intrinsic correlation of received signals and the coupling introduced by an antenna

## TUTORIAL

**96 RF Ceramic Chip Capacitors in High RF Power Applications**

*Richard Fiore, American Technical Ceramics Corp.*

Some of the most essential elements required for selecting capacitor products suitable for high RF power applications that necessitate the use of high quality, specialized ceramic chip capacitors

## TECHNICAL FEATURES

**110 A Digitally Compensated TCXO with Low Phase Noise Characteristics**

*Eric Jacquet, Jean-Pierre Bardon and Olivier Bignon, Temex Components*

A digitally compensated technology that can be utilized to produce less expensive high performance quartz crystal oscillators compared to those built in application-specific ICs due to the lower cost of investment and more flexibility in component choice

**118 Selecting a Pedestal for Tracking LEO Satellites at Ka Band**

*Keith Willey, University of Technology, Sydney (UTS), Cooperative Research Centre for Satellite Systems*

The issues involved in selecting a pedestal for tracking low earth orbit (LEO) satellites

*[Continued on page 12]*




## ON THE COVER

A dielectric resonator filter capable of achieving very low passband insertion loss and high near-band rejection is featured on this month's cover

**Cover art courtesy of Trilithic**

**136**

*Microwave Journal* (USPS 396-250) (ISSN 0192-6225) is published monthly by Horizon House Publications Inc., 685 Canton St., Norwood, MA 02062. Periodicals postage paid at Norwood, MA 02062 and additional mailing offices.

**Photocopy Rights:** Permission to photocopy for internal or personal use, or the internal or personal use of specific clients, is granted by *Microwave Journal* for users through Copyright Clearance Center provided that the base fee of $5.00 per copy of the article, plus $1 per page, is paid directly to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923 USA (978) 750-8400. For government and/or educational classroom use, the Copyright Clearance Center should be contacted. The rate for this use is 0.03 cents per page. Please specify ISSN 0192-6225 *Microwave Journal* International or ISSN 0192-6217 *Microwave Journal* Euro-Global. *Microwave Journal* can also be purchased on 35 mm film from University Microfilms, Periodic Entry Department, 300 N. Zeeb Rd., Ann Arbor, MI 48106 (313) 761-4700. Reprints: For requests of 100 or more reprints, contact Kriston Deshuk at (781) 769-9750.

POSTMASTER: Send address corrections to *Microwave Journal*, PO Box 3256, Northbrook, IL 60065-3256. Subscription information (847) 291-5216. This journal is issued without charge upon written request to qualified persons working in that part of the electronics industry, including governmental and university installation, that deals with VHF through light frequencies. Other subscriptions are domestic, $110.00 per year, two-year subscriptions, $165.00; foreign, $150.00 per year, two-year subscriptions, $340.00; back issues (if available) and single copies, $10.00 domestic and $20.00 foreign.

**©2000 by Horizon House Publications, Inc.**

Horizon House also publishes *Telecommunications®* and *Journal of Electronic Defense*

Posted under Canadian international publications mail agreement #0738654



# INNOVATIVE MIXERS

**.smaller size .better performance .lower cost**

50kHz to 4200MHz from $1.99 (10-49)

WOW!

*innovative technology*™

Searching high and low for a better frequency mixer? Then take a closer look at the Innovative Technology built into Mini-Circuits ADE mixers. ***Smaller size*** is achieved using an ultra-slim, patent pending package with a profile as low as 0.080 inches (2mm) in height. Electrically, ADE mixers deliver ***better performance*** than previous generation mixers through all welded connections and unique assembly construction which reduces parasitic inductance. The result is dramatically improved high frequency and IP2-IP3 performance. Plus, ADE's innovative package design allows water wash to drain and eliminates the possibility of residue entrapment. Another ADE high point is the ***lower cost***...priced from only $1.99 each (qty.10-49). So, if you've been searching high and low for a mixer to exceed expectations...ADE is *it*™



ACTUAL SIZE

***ADE Mixers...Innovations Without Traditional Limitations!***

**ADE* TYPICAL SPECIFICATIONS:**

| Model | Height (mm) | Freq. (MHz) | LO (dBm) | Conv. Loss Midband (dB) | L-R Isol. Bandwidth (dB) | IP3 (dBm) & Midband | Price ($ea.) Qty. 10-49 |
|---|---|---|---|---|---|---|---|
| ADE-1L | 3 | 2-600 | +3 | 5.2 | 55** | 16 | 3.95 |
| ADE-3L | 4 | 0.2-400 | +3 | 5.3 | 47** | 10 | 4.25 |
| ADE-1 | 4 | 0.5-500 | +7 | 5.0 | 55** | 15 | 1.99 |
| ADE-1ASK | 3 | 2-500 | +7 | 5.3 | 50** | 16 | 3.95 |
| ADE-2ASK | 3 | 1-1000 | +7 | 5.4 | 45** | 12 | 4.25 |
| ADE-5 | 5 | 0.05-250 | +7 | 4.5 | 40 | 10 | 4.95 |
| ADE-12 | 2 | 50-1000 | +7 | 7.0 | 35 | 17 | 2.95 |
| ADE-4 | 3 | 200-1000 | +7 | 6.9 | 53** | 15 | 4.25 |
| ADE-14 | 2 | 800-1000 | +7 | 7.4 | 32 | 17 | 3.25 |
| ADE-9D1 | 3 | 800-1000 | +7 | 5.9 | 32 | 13 | 2.95 |
| ADE-5 | 3 | 5-1500 | +7 | 6.6 | 40** | 15 | 3.45 |
| ADE-13 | 2 | 50-1600 | +7 | 8.1 | 40** | 11 | 3.10 |
| ADE-2C | 3 | 1500-2000 | +7 | 5.4 | 31 | 14 | 4.95 |
| ADE-18 | 3 | 1700-2500 | +7 | 4.9 | 27 | 10 | 3.45 |
| ADE-30L | 2 | 2100-2600 | +7 | 6.0 | 34 | 17 | 4.95 |
| ADE-3G | 3 | 2300-2700 | +7 | 5.6 | 36 | 13 | 3.45 |
| ADE-2E | 3 | 1500-2800 | +7 | 5.1 | 30 | 8 | 5.95 |
| ADE-30 | 3 | 200-3000 | +7 | 4.5 | 36 | 14 | 6.95 |
| ADE-3Z | 3 | 2500-3200 | +7 | 5.4 | 29 | 15 | 6.95 |
| ADE-3E | 3 | 1600-3500 | +7 | 5.3 | 25 | 11 | 4.95 |
| ADE-18W | 3 | 1750-3650 | +7 | 5.4 | 33 | 11 | 3.95 |
| ADE-30W | 3 | 300-4000 | +7 | 6.8 | 35 | 12 | 8.95 |
| ADE-1LH | 4 | 0.5-500 | +10 | 5.0 | 55** | 15 | 2.99 |
| ADE-1LHW | 3 | 2-750 | +10 | 5.2 | 52** | 15 | 5.95 |
| ADE-1MH | 3 | 2-500 | +13 | 5.2 | 50** | 17 | 5.95 |
| ADE-1MHW | 3 | 0.5-600 | +13 | 5.2 | 53** | 17 | 6.45 |
| ADE-1QMH | 3 | 10-1200 | +13 | 6.3 | 45** | 22 | 6.45 |
| ADE-2QMH | 3 | 5-2200 | +13 | 6.9 | 34** | 17 | 6.95 |
| ADE-39MH | 3 | 5-3500 | +13 | 6.9 | 33** | 18 | 9.95 |
| ADE-42MH | 3 | 5-4200 | +13 | 7.5 | 29** | 17 | 14.95 |
| ADE-1H | 4 | 0.5-500 | +17 | 5.3 | 52** | 23 | 4.95 |
| ADE-1QH | 3 | 400-1000 | +17 | 7.0 | 39 | 20 | 7.95 |
| ADE-12H | 3 | 500-1200 | +17 | 6.7 | 34 | 28 | 8.95 |
| ADE-17H | 3 | 100-1700 | +17 | 7.2 | 36 | 25 | 8.95 |
| ADE-2IH | 3 | 1500-2000 | +17 | 5.2 | 29 | 14 | 8.95 |

Component mounting area on customer PC board is 0.320"x 0.290".
**Specified midband. ***Patent Pending.***


Mini-Circuits®

US 86 INTL 87
CIRCLE READER SERVICE CARD

P.O.Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

*The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: http://www.minicircuits.com*

ISO 9001 CERTIFIED

F 267 Rev J

microwave JOURNAL®

# FEATURES

## TECHNICAL FEATURE

**128 Increasing Multitone Power Near Saturation**

*Allen Katz, Linearizer Technology Inc.*

The relationship between single-tone and multitone saturated power of traveling-wave-tube amplifiers

## PRODUCT FEATURES

**156 High Performance, Low Cost, Surface-mount Microwave Mixers**

*Blue Cell Technology, a family member of Mini-Circuits*

A series of high performance passive mixers developed using patented Blue Cell™ technology that exhibit good conversion loss and excellent LO-to-RF and LO-to-IF isolation

**160 Klystron High Power Amplifiers for SATCOM Applications**

*Communications & Power Industries (CPI)*

C-, Ku- and direct broadcast satellite-band power amplifiers, which incorporate a unique multistage depressed-collector klystron that allows for a smaller, more efficient and cooler running amplifier

**170 A Web-based Test Equipment Locator**

*TestMart*

A new online service that lists more than 13,000 products from 200 manufacturers in more than 90 test equipment categories and provides a means for side-by-side comparisons

# DEPARTMENTS

**15 . . . . . Coming Events**
**20 . . . . . Workshops & Courses**
**41 . . . . . News from Washington**
**49 . . . . . International Report**
**55 . . . . . Commercial Market**
**58 . . . . . Around the Circuit**
**142 . . . . . Catalog Update**
**174 . . . . . New Products**
**202 . . . . . New Literature**
**203 . . . . . The Book End**
**204 . . . . . Ad Index**
**206 . . . . . Sales Reps**

**Press run for this issue is 58,494 copies** **Printed in the USA**

# STAFF

**PUBLISHER/EDITOR:** HARLAN HOWE, JR.
**ASSOCIATE PUBLISHER:** EDWARD JOHNSON
**MANAGING EDITOR:** AMY E. NORCROSS
**TECHNICAL EDITOR:** FRANK M. BASHORE
**STAFF EDITOR:** CHRISTINA M. SCIAMMACCO
**EDITORIAL SECRETARIES:** ALLISON GRECO, GAYL SANZI
**CONSULTING EDITOR:** HOWARD I. ELLOWITZ
**CONSULTING EDITOR:** THEODORE S. SAAD
**CONSULTING EDITOR:** PETER STAECKER
**INT'L CORRESPONDENT:** MARTIN STREETLY
**INT'L STAFF EDITOR:** STEVE MCCLELLAND
**ASSISTANT TO THE PUBLISHER:** KRISTEN DEDNAH
**TRAFFIC MANAGER:** EDWARD KIESSLING
**TRAFFIC ADMINISTRATOR:** MICHELLE CARLETTI
**PRODUCTION MANAGER:** ROBERT BASS
**PRODUCTION ASSISTANT:** JUDY WIKLUND
**DESIGN DIRECTOR:** R.A. PIKE
**ART DIRECTOR:** BILL HAFF
**DTP COORDINATOR:** JANET A. MACDONALD
**GRAPHIC DESIGNER:** SACHIKO STIGLITZ
**GRAPHIC DESIGN GROUP:** SANDRA DENEAULT • ANDREW ROSS, HILARY SCHMIDT

**EUROPE**

**DEPUTY PUBLISHER:** SAM BAIRD
**OFFICE MANAGER:** EUGENIE HARDY
**SALES MANAGER:** GARETH WATSON

**CORPORATE STAFF**

**CHAIRMAN & EXECUTIVE OFFICER:** WILLIAM BAZZY
**PRESIDENT:** WILLIAM M. BAZZY
**VP FINANCE & OPERATIONS:** CHARLES A. AYOTTE
**VP GROUP PUBLISHING:** WILLIAM WALLER
**CORPORATE VICE PRESIDENT:** JOAN B. ECAN

**EDITORIAL REVIEW BOARD:**

Dr. S.F. Adam
Dr. I.J. Bahl
Dr. R.C. Baird
D.K. Barton
Dr. E.F. Belohoubek
Dr. C.R. Boyd
K.J. Button
Dr. K.L. Carr
H.F. Chapell
N.R. Dietrich
G. DiPiazza
Dr. C. Galani
Dr. F.E. Gardiol
Dr. A. Gilardini
Dr. P. Goldsmith
Dr. M.A.K. Hamid
J.L. Heaton
E.E. Hollis
Dr. W.E. Hord
Dr. L. Lewin
Dr. J.C. Lin
Dr. Stephen Maas
Dr. R.J. Mailloux
S. March
Dr. G.L. Matthaei
W.G. Matthei
Dr. D.N. McQuiddy
Dr. R.L. Mettivier
C.K.S. Miller
Dr. F.R. Morgenthaler
Dr. N.S. Nahman
Dr. J.M. Osepchuk
S.M. Perlow
Dr. W.L. Pritchard
Dr. L.J. Ricardi
Dr. U. Rohde
Dr. G.F. Ross
Dr. J.A. Saloom
Dr. P. Staecker
H. Stinehelfer
Dr. H.E. Stockman
J.J. Taub
Dr. J.G. Tenedorio
G.D. Vendelin
Dr. W.A.G. Voss
Dr. B.O. Weinschel
Dr. P. Weissglas
Dr. J. Wiltse

**EXECUTIVE EDITORIAL OFFICE:**
685 Canton Street, Norwood, MA 02062
Tel: (781) 769-9750
Fax: (781) 769-5037
e-mail: mwj@mwjournal.com
**www.mwjournal.com**

**EUROPEAN EDITORIAL OFFICE:**
46 Gillingham Street, London SW1V 1HH, England
Tel: Editorial: +44 171 596 8730 Sales: +44 171 596 8740
FAX: +44 171 596 8749

## QMI Semi-Rigid Replacement Assemblies


Don't be so Rigid!

| Semi-Flex® | Semi-Flex Plus® (Jacketed - Polyurethane) | Semi-Flex II® (Aluminum) | Q-Flex® (Jacket FEP Blue) |
|---|---|---|---|
| Available in .047, .086, .141, .250 (Cable Types) | Available in .047, .086, .141, (Cable Types) | Available in .086, .141, (Cable Types) | Available in .086, .141, .250 (Cable Types) |

## Tensolite - QMI

Tensolite-QMI is an advanced manufacturer of 50Ω and 75Ω RF and Microwave Interconnects and Cable Assemblies. Including Flexible, phase matched, delay lines and cable harnesses.

Data sheets available at
**www.qmiinc.com**

**1-800-362-FLEX**

Tensolite
QMI® RF/Microwave Interconnects
A CARLISLE Company

Richardson Electronics
Engineered Solutions
1-800-RF-POWER

e low skew cable fibre channel mil-c coax cable microwave coax Q-flex coax Q-flex coax semi-rigid twisted pair ca
o miniature custom cable 2mm ... assemblies fpd assemblies cable ass
hm and 75 ohm RF and microwave ... bes 2mm HM 2mm HDM dela
e assemblies (dc to 40 ghz) cable ... oax ultrasound probes semi-fle
ectors - sma smb smc mcx mmcx tnc bnc type f type n 7/16 ssma ssmb 3.5mm 7mm 2.4mm type n type f

# Tensolite

**www.tensolite.com**




- Low Insertion Loss
- Optimized VSWR
- Excellent Shielding Effectiveness
- High Power Capability
- Excellent Phase Stability over Flex and Temperature

## RF/Microwave Coaxial Cables

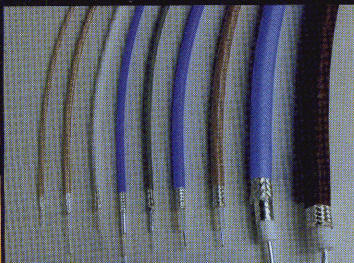

## Interconnect Solutions - DC to 40Ghz

Standard configuration and Custom applications Tensolite-QMI RF/Microwave has an engineering staff ready and able to provide an interconnect solution

CIRCLE 127 ON READER SERVICE CARD

# WIRELESS MARKET

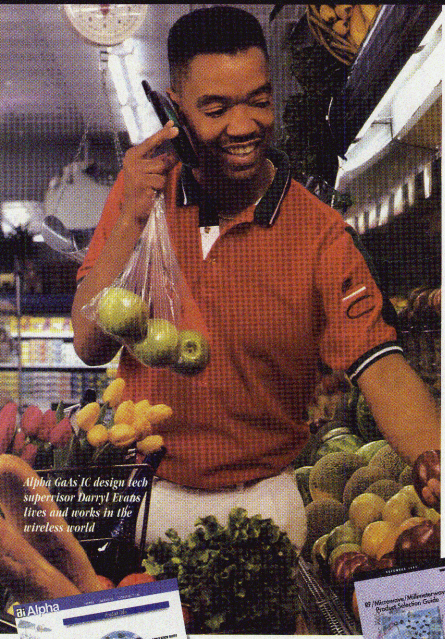

*Alpha GaAs IC design tech supervisor Darryl Evans lives and works in the wireless world*

## At Alpha...wireless is our expertise

- **GaAs RF ICs**
  - Power Amplifiers
  - Switches
  - Attenuators
  - Directional Couplers
  - Power Dividers
- **DISCRETE SEMICONDUCTORS**
  - Varactor Diodes
  - PIN Diodes
  - Receiving/Schottky Diodes
  - Attenuators
  - FETs
  - Chip Capacitors
- **MILLIMETERWAVE PRODUCTS**
  - Amplifiers (LNA, Power)
  - Mixers
  - Attenuators
  - Switches
  - Control Products




*For the latest new products & technology www.alphaind.com*




*GaAs RF ICs*
*Discrete Semiconductors*
*Millimeterwave Products*
*Register on our web site or call today for your Alpha catalogs!*

*Challenge Us Today...*

TDMA GSM CDMA BLUE TOOTH CATV LMDS WIRELESS LAN 3G WLL HOME RF DCS 1800 DBS WCDMA GSM CATV

## CALL OR SURF TODAY

781-935-5150 Dial "0" www.alphaind.com

20 Sylvan Road • Woburn, MA 01801 USA

ai Alpha

*from concept to solution....your wireless source*

CIRCLE 7 ON READER SERVICE CARD

*2000 International Conference on GaAs Manufacturing Technology (GaAs MANTECH)*
**May 1–4, 2000**
**Washington, DC**

Topics: Compound semiconductor manufacturing; 150 mm conversion; cycle time reduction; CIM tools for manufacturing environmental impact and cost management; processing; lithography; gate formation; low capacitance crossovers; high and low dielectric constant materials; failure mechanisms and module integration issues; test and reliability; high speed, high volume and low cost testing; device technologies; yield enhancement and thermal enhancement; optical devices; and materials and packaging. Contact: Wes Mickanin, TriQuint Semiconductor (503) 615-9253, fax (503) 615-8903 or e-mail: wesm@tqs.com. Additional information is available at www.gaasmantech.org/.

*Southern California's Regional IMAPS Symposium and Exhibition (SoCal 2000)*
**San Diego, CA**
**May 23, 2000**

Sponsors: San Diego Chapter of the International Microelectronics and Packaging Society (IMAPS). Topics: Low temperature co-fired ceramics, integrated passive components, flip-chip technology, quality management, telecommunications, chip-scale packaging and copper wire bonding. For registration information, contact Mike Grosse (858) 536-4733. For exhibition information, contact Marty Greenfield (619) 461-1060. Additional information is available at www.imaps.org/chapters/sandiego.htm.

*24th Workshop on Compound Semiconductor Devices and Integrated Circuits (WOCSDICE 2000)*
**May 29 - June 2, 2000**
**Aegean Sea, Greece**

Topics: Compound semiconductor devices and integrated circuits for microwave, millimeter-wave and opto-electronic applications; material growth and characterization; active device technology for MMIC applications (MESFET, HEMT and HBT); power devices; novel device technologies and quantum electronics; and reliability and characterization. Contact: Dimitris Pavlidis, University of Michigan, Department of Electrical Engineering and Computer Science, 1301 Beal Ave., Ann Arbor, MI 48109 (734) 647-1778 or e-mail: pavlidis@umich.edu. Additional information can be obtained at www.eecs.umich.edu/dp-group/Wocsdice.html.

*2000 IEEE Radio Frequency Integrated Circuits (RFIC) Symposium*
**June 11–13, 2000**
**Boston, MA**

Sponsor: IEEE MTT-S. Topics: Highly integrated ICs and system IC solutions in the RF/microwave frequency range (Si, SiGe, SOI, CMOS, BiCMOS, RFCMOS, GaAs and InP); mixed-signal, cellular/PCS/ISM, receiver, transmitter, and microwave and mm-wave ICs; multifunction ICs and multichip modules; RF/microwave subsystems; integrated filters and antennas; and packaging, testing and reliability. Contact: Christian Kermarrec, Analog Devices (781) 937-1217 or e-mail: christian.kermarrec@analog.com. Additional symposium information is available at www.ims2000.org.rfic.htm.

*2000 IEEE MTT-S International Microwave Symposium and Exhibition*
**June 11–16, 2000**
**Boston, MA**

Sponsor: IEEE MTT-S. Topics: Analysis and design; components and assemblies; passive and active microwave technology; frequencies greater than 30 GHz; fabrication, integration and test; phased array design and applications; quasi-optic techniques and systems; broadband terrestrial


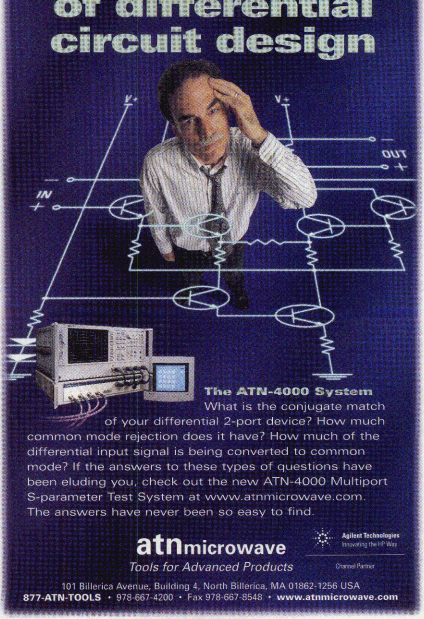




CIRCLE 28 ON READER SERVICE CARD

testmart
THE TEST & MEASUREMENT CENTER



# Show Me What You've Got

**[ I need impartial comparisons and a way to buy right away ]**





*Tough test and measurement equipment choices?* When you need to compare apples to apples to make a purchasing decision, TestMart–a unique Web-based service where you can buy or sell with confidence–is just a click away.

- Unbiased product comparisons with advanced parametric search tools
- 750,000 comprehensive specifications on over 12,000 products
- Application Engineers are available online or toll-free
- All of your test and measurement equipment requirements, 24/7

Gone are the hassles of piecing together inadequate information from one-dimensional sources. Our integrated Compare Specs tool and secure commerce areas allow you to determine whether to buy, lease or rent new and refurbished equipment and to sell your underutilized equipment online.

Finally, the power to make timely, cost-effective decisions is in your hands from research through delivery.

*Now, go try it. We're ready when you are.*

**www.testmart.com**

CIRCLE 161 ON READER SERVICE CARD

and satellite communication; biological and medical applications; wireless and cellular communications; and sensor and sensor systems. For symposium information, contact Peter Staecker, technical program chair (781) 861-7643, fax (781) 863-5751 or e-mail: pstaecker@ieee.org. For exhibition information, contact Kristen Dednah, Horizon House Publications, 685 Canton St., Norwood, MA 02062 (781) 769-9750 or e-mail: kdednah@mwjournal.com. Additional information is available at www.ims2000.org.

### *55th ARFTG Conference*
**June 15–16, 2000**
**Boston, MA**

Sponsors: Automatic Radio Frequency Techniques Group (ARFTG) and IEEE MTT-S. Topics: Coherent characterization, modeling and simulation techniques quantifying large-signal behavior of RF devices, circuits and systems; calibration of large-signal measurement systems; definition of large-signal network parameters; creation of large-signal models; and simulation and measurement of high frequency, large-signal behavior. For additional information, contact Michael Fennelly, Ross Instruments, 328 Forest St., North Andover, MA 01845 (978) 258-4101, fax (978) 258-4102 or e-mail: m.fennelly@ieee.org. Additional conference information is available at www.arftg.org.

### *Topical Meeting on MEMS for High Q Filters*
**July 17–18, 2000**
**University of Surrey, UK**

Sponsors: IEEE UK and Republic of Ireland MTT/AP/LEO/ED Joint Chapter Administrative Committee, University of Surrey and IEEE MTT-S. Topics: High Q filter design; micromachined electromechanical systems (MEMS); application-specific ICs; MMICS; flip-chip, hybrid and multichip module boards; ultraminiature transmit and receive systems; and commercial simulation tools. Contact: Steve Marsh, Marconi Caswell Ltd. +44 (0) 1327 356 426, fax +44 (0) 1327 356775 or e-mail: steve.marsh@ieee.org. Additional information is available at www.surrey.ac.uk/Where/index.html.

### *2000 IEEE International Symposium on Electromagnetic Compatibility*
**August 21–25, 2000**
**Washington, DC**

Sponsor: IEEE EMC Society. Topics: Electromagnetic compatibility management, certification and accreditation, testing, shielding and grounding, electrostatic discharge, spectrum efficiency and monitoring, product and environmental safety, international government standards and certification news, new product designs, commercial and military trends, new personnel and laboratory ideas for electromagnetic compatibility corporate management. For symposium information, contact William Duff, Computer Sciences Corp. (703) 914-8450 or e-mail: wduff@csc.com.

### *2000 IEEE-APS Conference on Antennas and Propagation for Wireless Communications (APWC 2000)*
**November 6–8, 2000**
**Waltham, MA**

Sponsors: IEEE Antenna and Propagation Society and IEEE Boston section. Topics: Military to commercial technology transition, architecture trends, base station and satellite antenna developments, adaptive and active wireless communications arrays, novel antennas and passive array configurations, multiband operation and polarization characteristics, mobile antennas and vehicle modeling, packaging integration and portable devices, antenna CAD, human interaction with antennas, MEMS, and indoor/outdoor propagation and channel models. For additional information, contact the conference office at (781) 890-5290, fax (781) 890-5294 or e-mail: bostonieee@aol.com. Additional information is available at www.ece.unm.edu/apwc2000/.


# Gunn Ho!

MDC is charging forward, and our customers are "Gunn Ho" about our line of high frequency Gunn oscillators. Applications include 18, 23, 38, and 50 GHz PCN radio frequencies as well as 60 and 76.5 collision avoidance bands.





Microwave Development Company, Inc. also offers filters, circulators, shutter switches, couplers and related waveguide components at competitive prices to help you be more competitive in today's commercial and military markets.



MICROWAVE DEVELOPMENT COMPANY, INC.

Forty One Northwestern Drive
Salem, New Hampshire 03079
Sales: (603)-870-6280 • Fax: (603)-870-6210
E-Mail: microwav@mdc.usa.com
www.mdc-inc.net

EST. 1981

MDC




CIRCLE 76 ON READER SERVICE CARD

# ULTRA-LOW NOISE AMPLIFIERS VHF TO V-BAND

| MODEL NUMBER | FREQUENCY RANGE (GHz) | GAIN (dB, Min.) | GAIN VARIATION (±dB, Max.) | NOISE FIGURE (dB, Max.) | VSWR IN | VSWR OUT | POWER OUT @ 1 dB COMPR. (dBm, Min.) | | DC POWER @ +15 V (mA, Nom.) |
|---|---|---|---|---|---|---|---|---|---|
| **OCTAVE BAND AMPLIFIERS** | | | | | | | | | |
| JS2-00500100-035-5A | 0.5 – 1 | 35 | 1 | 0.45 | 2:1 | 2:1 | 5 | | 250 |
| JS2-00500100-10-5A | 0.5 – 1 | 35 | 1.2 | 1 | 2:1 | 2:1 | 5 | | 250 |
| JS2-01000200-035-5A | 1 – 2 | 33 | 1 | 0.45 | 2:1 | 2:1 | 5 | $395 | 250 |
| JS2-01000200-10-5A | 1 – 2 | 33 | 1.2 | 1 | 2:1 | 2:1 | 5 | | 250 |
| JS2-02000400-035-5A | 2 – 4 | 28 | 1 | 0.45 | 2:1 | 2:1 | 5 | $450 | 175 |
| **JS2-02000400-10-5A** | **2 – 4** | **28** | **1.2** | **1** | **2:1** | **2:1** | **5** | | **175** |
| JS2-04000800-070-0A | 4 – 8 | 22 | 1 | 0.7 | 2:1 | 2:1 | 0 | $495 | 150 |
| **JS2-04000800-15-0A** | **4 – 8** | **22** | **1.2** | **1.5** | **2:1** | **2:1** | **0** | | **150** |
| JS3-04000800-060-5A | 4 – 8 | 30 | 1 | 0.6 | 2:1 | 2:1 | 5 | | 175 |
| JS3-04000800-15-5A | 4 – 8 | 30 | 1 | 1.5 | 2:1 | 2:1 | 5 | | 175 |
| JS2-08001200-095-5A | 8 – 12 | 15 | 1 | 0.9 | 2:1 | 2:1 | 5 | $495 | 150 |
| **JS2-08001200-15-5A** | **8 – 12** | **15** | **1.2** | **1.5** | **2:1** | **2:1** | **5** | | **150** |
| JS3-08001200-080-5A | 8 – 12 | 25 | 1 | 0.8 | 2:1 | 2:1 | 5 | | 175 |
| JS3-08001200-115-5A | 8 – 12 | 25 | 1 | 1.5 | 2:1 | 2:1 | 5 | | 175 |
| JS2-12001800-16-5A | 12 – 18 | 15 | 1 | 1.6 | 2:1 | 2:1 | 5 | $495 | 100 |
| **JS2-12001800-30-5A** | **12 – 18** | **15** | **1.5** | **3** | **2:1** | **2:1** | **5** | | **100** |
| JS3-12001800-16-5A | 12 – 18 | 23 | 1 | 1.6 | 2:1 | 2:1 | 5 | $495 | 175 |
| **JS3-12001800-30-5A** | **12 – 18** | **23** | **1** | **3** | **2:1** | **2:1** | **5** | | **175** |
| JS4-12001800-12-5A | 12 – 18 | 30 | 1 | 1.2 | 2:1 | 2:1 | 5 | | 200 |
| JS4-12001800-30-5A | 12 – 18 | 30 | 1 | 3 | 2:1 | 2:1 | 5 | | 200 |
| JS2-18002600-30-5A | 18 – 26 | 14 | 1 | 3 | 2:1 | 2:1 | 5 | | 100 |
| JS2-18002600-30-5A | 18 – 26 | 14 | 1 | 3 | 2:1 | 2:1 | 5 | | 100 |
| JS3-18002600-20-5A | 18 – 26 | 22 | 1 | 2 | 2:1 | 2:1 | 5 | | 175 |
| JS3-18002600-30-5A | 18 – 26 | 22 | 1 | 3 | 2:1 | 2:1 | 5 | | 175 |
| JS4-18002600-16-5A | 18 – 26 | 27 | 1 | 1.6 | 2:1 | 2:1 | 5 | | 200 |
| JS4-18002600-26-5A | 18 – 26 | 27 | 1 | 2.6 | 2:1 | 2:1 | 5 | | 200 |
| JS2-26004000-35-5A | 26 – 40 | 12 | 2 | 3.5 | 2:1 | 2:1 | 5 | | 100 |
| JS2-26004000-45-5A | 26 – 40 | 12 | 2 | 4.5 | 2:1 | 2:1 | 5 | | 100 |
| JS3-26004000-35-5A | 26 – 40 | 18 | 2 | 3.5 | 2.5:1 | 2.5:1 | 8 | | 175 |
| JS3-26004000-45-5A | 26 – 40 | 18 | 2 | 4.5 | 2.5:1 | 2.5:1 | 8 | | 175 |
| JS4-26004000-30-5A | 26 – 40 | 23 | 2.5 | 4 | 2:1 | 2:1 | 8 | | 200 |
| JS2-26004000-100-20A | 26 – 40 | 17 | 1.25 | 10 | 2.3:1 | 2.3:1 | 20 | | * |
| JS4-40006000-65-0A | 40 – 60 | 15 | 3 | 6.5 | 2.75:1 | 2.75:1 | 0 | | 175 |
| **MULTIOCTAVE BAND AMPLIFIERS** | | | | | | | | | |
| JS2-00500200-05-5A | 0.5 – 2 | 32 | 1 | 0.5 | 2:1 | 2:1 | 5 | | 250 |
| JS2-00500200-20-5A | 0.5 – 2 | 32 | 1 | 2 | 2:1 | 2:1 | 5 | | 250 |
| JS2-01000400-07-5A | 1 – 4 | 27 | 1 | 0.7 | 2:1 | 2:1 | 5 | | 200 |
| JS2-01000400-20-5A | 1 – 4 | 27 | 1 | 2 | 2:1 | 2:1 | 5 | | 200 |
| JS2-02000600-07-5A | 2 – 6 | 24 | 1 | 0.7 | 2:1 | 2:1 | 5 | | 125 |
| JS2-02000600-20-5A | 2 – 6 | 20 | 1 | 2 | 2:1 | 2:1 | 5 | | 125 |
| JS2-02000800-08-0A | 2 – 8 | 22 | 1 | 0.8 | 2:1 | 2:1 | 0 | | 125 |
| JS2-02000800-20-0A | 2 – 8 | 18 | 1 | 2 | 2:1 | 2:1 | 0 | | 125 |
| JS3-02001800-25-5A | 2 – 18 | 21 | 2 | 2.5 | 2.5:1 | 2.5:1 | 5 | | 150 |
| JS3-02001800-50-5A | 2 – 18 | 21 | 2 | 5 | 2.5:1 | 2.5:1 | 5 | | 150 |
| JS4-02001800-22-5A | 2 – 18 | 30 | 2 | 2.2 | 2.5:1 | 2.5:1 | 5 | | 200 |
| JS4-02001800-50-5A | 2 – 18 | 30 | 2 | 5 | 2.5:1 | 2.5:1 | 5 | | 200 |
| JS3-02002600-30-5A | 2 – 26 | 21 | 2 | 3 | 2:1 | 2:1 | 5 | | 150 |
| JS3-02002600-40-5A | 2 – 26 | 21 | 2 | 4 | 2:1 | 2:1 | 5 | | 150 |
| JS3-06001800-18-5A | 6 – 18 | 23 | 1.3 | 1.8 | 2:1 | 2:1 | 5 | | 125 |
| JS3-06001800-30-5A | 6 – 18 | 23 | 1.3 | 3 | 2:1 | 2:1 | 5 | | 125 |
| JS4-06001800-135-5A | 6 – 18 | 31 | 1 | 1.35 | 2:1 | 2:1 | 5 | | 200 |
| JS4-06001800-30-5A | 6 – 18 | 31 | 2 | 3 | 2:1 | 2:1 | 5 | | 200 |

* Noise figure is 0.35 dB available on a limited basis.

** This unit requires +8V @ 500 mA and -8V @ 90 mA.

# MITEQ's JS SERIES AMPLIFIERS

- High Performance/Price Ratio
- Superior, Rugged Technology
- Low Phase Distortion Design



Actual 18 to 40 GHz Design

| MODEL NUMBER | FREQUENCY RANGE (GHz) | GAIN (dB, Min.) | GAIN VARIATION (±dB, Max.) | NOISE FIGURE (dB, Max.) | VSWR IN | VSWR OUT | POWER OUT @ 1 dB COMPR. (dBm, Min.) | DC POWER @ +15 V (mA, Nom.) |
|---|---|---|---|---|---|---|---|---|
| **MULTIOCTAVE BAND AMPLIFIERS (Continued)** | | | | | | | | |
| JS3-08001800-17-5A | 8 – 18 | 24 | 1.2 | 1.7 | 2:1 | 2:1 | 5 | 125 |
| JS3-08001800-30-5A | 8 – 18 | 24 | 1.2 | 3 | 2:1 | 2:1 | 5 | 125 |
| JS4-08001800-13-5A | 8 – 18 | 32 | 1.5 | 1.3 | 2:1 | 2:1 | 5 | 200 |
| JS4-08001800-30-5A | 8 – 18 | 32 | 1.5 | 3 | 2:1 | 2:1 | 5 | 200 |
| JS3-08002600-30-5A | 8 – 26 | 21 | 2.2 | 3 | 2:1 | 2:1 | 5 | 150 |
| JS3-08002600-40-5A | 8 – 26 | 21 | 2 | 4 | 2:1 | 2:1 | 5 | 150 |
| JS3-12002600-25-5A | 12 – 26 | 22 | 2 | 2.5 | 2:1 | 2:1 | 5 | 150 |
| JS3-12002600-35-5A | 12 – 26 | 22 | 2 | 3.5 | 2:1 | 2:1 | 5 | 150 |
| JS4-12002600-22-5A | 12 – 26 | 30 | 1.7 | 2.2 | 2:1 | 2:1 | 5 | 200 |
| JS4-12002600-35-5A | 12 – 26 | 30 | 1.7 | 3.5 | 2:1 | 2:1 | 5 | 200 |
| JS3-18004000-38-5A | 18 – 40 | 16 | 2.5 | 3.8 | 2.5:1 | 2.5:1 | 5 | 150 |
| JS3-18004000-50-5A | 18 – 40 | 16 | 2.5 | 5 | 2.5:1 | 2.5:1 | 5 | 150 |
| JS4-18004000-30-5A | 18 – 40 | 23 | 2.5 | 3 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-18004000-50-5A | 18 – 40 | 23 | 2.5 | 5 | 2.5:1 | 2.5:1 | 5 | 200 |
| **ULTRAWIDE BAND AMPLIFIERS** | | | | | | | | |
| JS2-00100200-06-5A | 0.1 – 2 | 32 | 1 | 0.6 | 2:1 | 2:1 | 5 | 250 |
| JS2-00100200-15-5A | 0.1 – 2 | 32 | 1 | 1.5 | 2:1 | 2:1 | 5 | 250 |
| JS2-00100400-08-5A | 0.1 – 4 | 27 | 1 | 0.8 | 2:1 | 2:1 | 5 | 200 |
| JS2-00100400-12-5A | 0.1 – 4 | 27 | 1 | 1.2 | 2:1 | 2:1 | 5 | 200 |
| JS2-00100600-10-3A | 0.1 – 6 | 23 | 1.5 | 1 | 2:1 | 2:1 | 3 | 175 |
| JS2-00100800-20-5A | 0.1 – 8 | 23 | 1.5 | 2 | 2:1 | 2:1 | 5 | 175 |
| JS2-00100800-13-0A | 0.1 – 8 | 20 | 1.5 | 1.3 | 2:1 | 2:1 | 0 | 175 |
| JS2-00100800-25-0A | 0.1 – 8 | 20 | 1.5 | 2.5 | 2:1 | 2:1 | 0 | 175 |
| JS3-00101000-18-5A | 0.1 – 10 | 26 | 1.5 | 1.8 | 2:1 | 2:1 | 5 | 150 |
| JS3-00101000-35-5A | 0.1 – 10 | 26 | 1.5 | 3.5 | 2:1 | 2:1 | 5 | 150 |
| JS3-00101200-19-5A | 0.1 – 12 | 25 | 1.5 | 1.9 | 2:1 | 2:1 | 5 | 150 |
| JS3-00101200-35-5A | 0.1 – 12 | 25 | 1.5 | 3.5 | 2:1 | 2:1 | 5 | 150 |
| JS3-00101800-26-5A | 0.1 – 18 | 23 | 1.5 | 2.6 | 2.5:1 | 2.2:1 | 5 | 150 |
| JS3-00101800-40-5A | 0.1 – 18 | 23 | 1.5 | 4 | 2.5:1 | 2.2:1 | 5 | 150 |
| JS4-00101800-23-5A | 0.1 – 18 | 29 | 1.8 | 2.3 | 2.5:1 | 2.2:1 | 5 | 200 |
| JS4-00101800-40-5A | 0.1 – 18 | 29 | 1.8 | 4 | 2.5:1 | 2.2:1 | 5 | 200 |
| JS4-00102000-25-5A | 0.1 – 20 | 28 | 1.8 | 2.5 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-00102000-35-5A | 0.1 – 20 | 28 | 1.8 | 3.5 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS3-00102600-32-5A | 0.1 – 26 | 20 | 1.8 | 3.2 | 2.5:1 | 2.5:1 | 5 | 150 |
| JS3-00102600-42-5A | 0.1 – 26 | 20 | 1.8 | 4.2 | 2.5:1 | 2.5:1 | 5 | 150 |
| JS4-00102600-28-5A | 0.1 – 26 | 27 | 2 | 2.8 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-00102600-50-5A | 0.1 – 26 | 27 | 2 | 5 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-00103000-35-5A | 0.1 – 30 | 20 | 2.5 | 3.5 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-00103000-45-5A | 0.1 – 30 | 20 | 2.5 | 4.5 | 2.5:1 | 2.5:1 | 5 | 200 |
| JS4-00104000-65-5A | 0.1 – 40 | 14 | 3.5 | 6.5 | 2.75:1 | 2.75:1 | 5 | 200 |
| JS4-00104000-85-5A | 0.1 – 40 | 14 | 3.5 | 8.5 | 2.75:1 | 2.75:1 | 5 | 200 |

NOTE: Higher 1 dB compression levels are available on many designs.

**For additional information or technical support, please contact either Rosalie DeSousa at (516) 439-9458, e-mail rdesousa@miteq.com or Rizwan Syed at (516) 439-9267, e-mail rsyed@miteq.com.**

MITEQ
100 Davids Drive, Hauppauge, NY 11788
TEL: (516) 436-7400 • FAX: (516) 436-7430
http://www.miteq.com

CIRCLE 110 ON READER SERVICE CARD







# WORKSHOPS & COURSES

## Advanced Wireless and Microwave Techniques

■ **Topics:** Advanced RF and microwave design techniques, VCO and stable oscillator design, small antenna and filter limitations, and passive and active mixers. Fee: $1895.
■ **Site:** Mountain View, CA
■ **Date:** May 8–12, 2000
■ **Contact:** Besser Associates, 201 San Antonio Circle, Bldg. E, Mountain View, CA 94040 (650) 949-3300 or e-mail: info@bessercourse.com.

## Digital Signal Processing: Theory, Algorithms and Implementation

■ **Topics:** Core theory and algorithms of digital signal processing (DSP), and implementation of DSP strategies through laboratory sessions. Fee: $1695.
■ **Site:** Los Angeles, CA
■ **Date:** May 15–19, 2000
■ **Contact:** UCLA Extension, Dept. of Engineering, 10995 Le Conte Ave., Los Angeles, CA 90024 (310) 825-3344, fax (310) 206-2815 or e-mail: mhenness@unex.ucla.edu.

## CMOS Analog Integrated Circuits

■ **Topics:** CMOS and BiCMOS analog IC fabrication processing/design, large- and small-signal modeling, high performance operational amplifiers, comparator analysis design and analog-to-digital converters. Fee: $1295.
■ **Site:** Milpitas, CA
■ **Date:** May 15–19, 2000
■ **Contact:** Georgia Institute of Technology, Continuing Education, Atlanta, GA 30377 (404) 385-3501 or e-mail: conted@gatech.edu.

## Wideband CDMA Communications

■ **Topics:** Third-generation wideband CDMA and IMT2000 requirements, advanced signal processing techniques, wireless propagation channels and multipath channel mitigation techniques. Fee: $895.
■ **Site:** New York, NY
■ **Date:** May 18–19, 2000
■ **Contact:** Besser Associates, 201 San Antonio Circle, Bldg. E, Mountain View, CA 94040 (650) 949-3300 or e-mail: info@bessercourse.com.

## Fiber-optic Networks

■ **Topics:** Optical communications, access and transport technologies, optical fibers and fiber-optic amplifiers, SONET and SDH, wavelength division multiplexing, and network deployment and management.
■ **Site:** Cambridge, UK
■ **Date:** May 22–25, 2000
■ **Contact:** Continuing Education Institute (CEI)-Europe, PO Box 912, S-612 25 Finspong, Sweden +46 122 175 70 or e-mail: cei.europe@cei.se. Additional information can be obtained at www.cei.se.

## Antennas: Principles, Design and Measurements

■ **Topics:** Antenna fundamentals, arrays, wire and broadband antennas, horns, reflectors, systems antennas, electromagnetic compatibility topics and measurements.
■ **Site:** Orlando, FL
■ **Date:** May 22–25, 2000
■ **Contact:** Kelly Brown, Northeast Consortium for Engineering Education, 1101 Massachusetts Avenue, St. Cloud, FL 34769 (407) 892-6146, fax (407) 892-0406 or e-mail: stcloudofl@aol.com. Additional information is available at www.usit.com/antenna.

## Wireless Receivers, Signals and Noise

■ **Topics:** Communications theory; channels, signals and noise; error control and propagation; and spread spectrum and diversity techniques.
■ **Site:** Garmisch-Partenkirchen, Germany
■ **Date:** June 8–9, 2000
■ **Contact:** CEI-Europe, PO Box 912, S-612 25 Finspong, Sweden +46 122 175 70 or e-mail: cei.europe@cei.se. Additional information can be obtained at www.cei.se.

## Self-study Radar Course

■ **Topics:** Radar principles, functions and parameters, the radar equation, target detection, tracking and track-while-scan, radar hardware, signal processing and case studies. Textbook included. Fee: $384.
■ **Contact:** IEEE Customer Service Dept., 445 Hoes Lane, PO Box 1331, Piscataway, NJ 08855 (800) 678-4333 or e-mail: customer-service@ieee.org.

Specs are what you are given...

# brilliance is what you give back.

## begin with Ansoft HFSS

**Design microwave transitions, connectors, waveguides, IC packaging, on-chip components, antennas, antenna feed networks, and EMI compliance.**

Success is something that engineers, the world over, are realizing with Ansoft's High Frequency Structure Simulator (HFSS). They recognize that using 3D electromagnetic simulation to extract electrical parameters is the right solution for tough design challenges. Ansoft HFSS is preferred because the intuitive interface simplifies design entry, the field solving engine automatically converges to accurate solutions, and the powerful post-processor provides unprecedented insight into electrical performance.

And now with Optimetrics™, the new parametric analysis and optimization module, Ansoft HFSS is the most powerful electromagnetic design tool on the market.

For a free evaluation copy of Ansoft HFSS or any of the tools in Ansoft's Serenade Design Environment call 412-261-3200 or send e-mail to info@ansoft.com.



*Use Ansoft HFSS to calculate and optimize fields and s-parameters*

Amaze

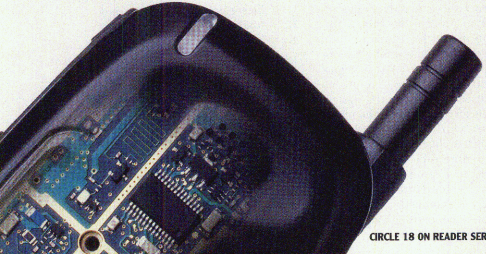

ANSOFT

high performance EDA

www.ansoft.com

CIRCLE 18 ON READER SERVICE CARD

# A 2.45 GHz Low Cost, High Performance VCO

*This article addresses performance and cost issues associated with voltage-controlled oscillator design. Although the example design is application specific, the methods demonstrated apply to microwave oscillator design in general. CAE and on-the-bench techniques are used for a comprehensive approach to the designing of microwave oscillators.*

Engineers are under constant pressure to reduce the cost of microwave designs without sacrificing their performance. At 100 K volumes, oscillators can be produced at a fraction of the cost when compared to that of small-quantity purchased oscillators. This article presents a design procedure along with a practical example. An attempt is made to clarify some of the concerns associated with low cost, high performance microwave oscillator design. Performance considerations include low phase noise, linear monotonic tuning, low harmonic emissions and adequate output power.

## INITIAL TOPOLOGY SELECTION

All oscillator circuits require a gain block and a feedback method. The topology used here is based on the Barkhausen criteria for oscillation. ***Figure 1*** shows that the design requires a network to provide the gain, a frequency selection network (resonator) and enough phase lag so that the overall phase for the loop is equal to $2\pi$ radians. A small-signal scattering parameter approach is used to evaluate the design. This method enables the use of a network analyzer for the bench evaluation.

*Fig. 1 A basic oscillator configuration.* ▼




Before proceeding with the design, Lesson's equation for single-sideband phase noise $\mathcal{L}_{PM}$ is examined.[1] The various factors concerning single-sideband phase noise can be considered using this equation:

$$\mathcal{L}_{PM}(\text{dBc / Hz}) = 10\log\left[\frac{1}{2}\left[\left[\left(\frac{F}{2Qfm}\right)^2+1\right]\bullet\left(\frac{C}{fm}+1\right)\bullet\left(\frac{NkT}{P}\right)\right]+\frac{2kTR_vK_v^2}{fm^2}\right]$$

where

k = Boltzmann's constant
T = temperature in Kelvin
F = frequency of oscillation
fm = offset frequency
Q = loaded Q
P = RF power at amplifier input
N = noise factor
C = flicker noise corner frequency
$R_v$ = tuning diode noise resistance
$K_v$ = tuning gain (MHz/V)

(The equation has been modified to include the effects of varactor tuning.) Practical reduction of the oscillator's noise sidebands is addressed by increasing the loaded Q and signal-to-noise ratio (SNR) and decreasing both the flicker and varactor modulation noise contributions.

*[Continued on page 24]*

JIM CARLINI
*Detection Systems*
*Fairport, NY*

# A Formal Invitation

## To Try RLC Filters

**Band Pass, Low Pass, High Pass, Band Reject & Diplexers • DC to 40 GHz**
**Spurious Free • Low Insertion Loss • Low VSWR • High Rejection**

*RLC Filters are ideal for Cellular, PCS, VSAT, Microwave Radio, LANs, and Wireless applications. Delivery responsive to your needs.*

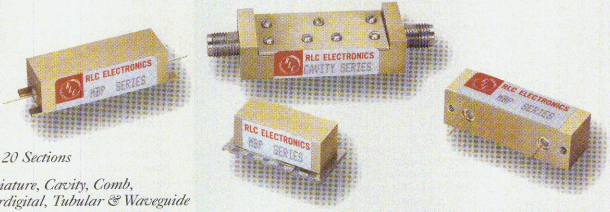


*2 to 20 Sections*

*Miniature, Cavity, Comb, Interdigital, Tubular & Waveguide*

*Chebychev, Bessel, Gaussian, Elliptic or Proprietary Response*

*Connectorized, Surface Mount, PCB Mount*

*Milliwatts to Kilowatts*

*50Ω or 75Ω*

*MIL-E-5400, Class 3*

*ISO-9002 Certified*

*NEW E-Z FILTER FINDER DISK*
*Complete Product Catalog to assist with selection and ordering*
*(Disk is DOS/Windows compatible)*



**RLC ELECTRONICS, INC.**

*83 Radio Circle, Mount Kisco, New York 10549 • Telephone: 914-241-1334 • Fax: 914-241-1753*
*e-mail: sales@rlcelectronics.com • www.rlcelectronics.com*

*RLC is your complete Microwave Component source...*
*Switches, Couplers, Power Dividers, Terminations, Attenuators, DC Blocks, Bias Tees & Detectors.*

CIRCLE 141 ON READER SERVICE CARD

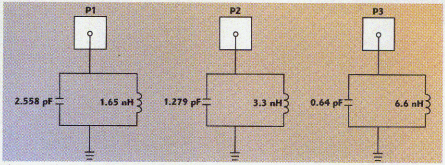


*Fig. 2 Three 2.45 GHz tank circuits used in the simulation.*


Microwave Sources

*Choose REMEC Magnum as part of your Total Microwave Solution*

From VCOs to synthesizers, REMEC Magnum offers Microwave Sources for communications systems and creates custom solutions to meet the challenging requirements of the rapidly evolving marketplace. REMEC has shipped thousands of VCOs and DROs for Point-to-Point Radio links, VSAT terminals, SONET and SDH clock recovery.

**NEW! 10 Gbit Optical Clock VCOs**

Take advantage of REMEC Magnum's 15 years experience producing highly reliable hybrid microcircuit VCOs for your SONET/SDH optical clock recovery circuit. Consistent low phase noise over a broad spectrum insures low jitter.

- Frequency 9.95328 GHz, 10.664 GHz, 12.4 GHz
- Tuning Range ± 100 MHz
- Power Output +9 to +13 dBm
- Phase Noise (100 KHz offset) -80 dBc/Hz

**NEW! LMDS Phase Locked Sources**

Whether you are using harmonic conversion, multiplying a PLDRO or need a fundamental oscillator for an LMDS ODU, REMEC Magnum has the solution. REMEC offers phase-locked DROs using an oven stabilized internal crystal oscillator or locking to your external reference. These units are designed for high production at low cost.

- Frequency Capability 8 GHz to 28 GHz
- Stability (internal reference) ± 4 ppm (optionally ± 2 ppm)
- Power Output +16 dBm
- Spurious -85 dBc
- Harmonics -40 dBc
- Phase Noise (12.4 GHz)

| | |
|---|---|
| 100 Hz | -70 dBc/Hz |
| 1 KHz | -95 dBc/Hz |
| 10 KHz | -105 dBc/Hz |
| 100 KHz | -110 dBc/Hz |
| 1 MHz | -130 dBc/Hz |

**The Total Microwave Solution**

*Email inquiries to sales@remecmagnum.com*
*Visit our website at www.remecmagnum.com*

**408-432-9898**

REMEC Magnum, Inc.
1990 Concourse Drive
San Jose, CA 95131
Fax 408.432.1551

REMEC
*Building solutions through teamwork.*


## RESONATOR DESIGN

The unloaded Q of the resonator ultimately limits the oscillator's loaded Q. The relationship between the loaded Q and noise sidebands can be written as $-10\log(Q_{loaded})^2$. This relationship holds true until the ratio of the loaded Q to unloaded Q exceeds 2/3. To achieve a high unloaded Q the design must maintain the lowest possible series resistance and achieve the lowest possible L/C ratio for the components used in the tank. A fast change in the reflection phase on either side of the resonant frequency indicates a high unloaded Q. ***Figure 2*** shows three 2.45 GHz tanks used in the simulation. The simulation results shown in ***Figure 3*** clearly indicate that the 1.65 nH || 2.558 pF tank circuit produces a rapid change in the reflection phase on either side of the resonant frequency, making it the best L/C combination for the proposed resonator.

A novel design approach was taken that uses a Coilcraft microspring air-core coil. (This coil is available at greatly reduced cost when compared to that of a typical distributed ceramic or Teflon resonator.) It was estimated that the 1.65 nH coil could maintain a Q of at least 180 at 2.5 GHz. This Q value was determined to be high enough for the intended resonator design. The air-core inductor is a primary component in lower frequency RF oscillator designs. The problem at microwave frequencies is that the inductor Q degrades with frequency, particularly as the coil approaches its self-resonant frequency (SRF). The SRF for the 1.65 nH inductor is greater than 10 GHz, thus eliminating this concern.




*Fig. 3 Simulation results for the three tank circuits.*

*[Continued on page 26]*

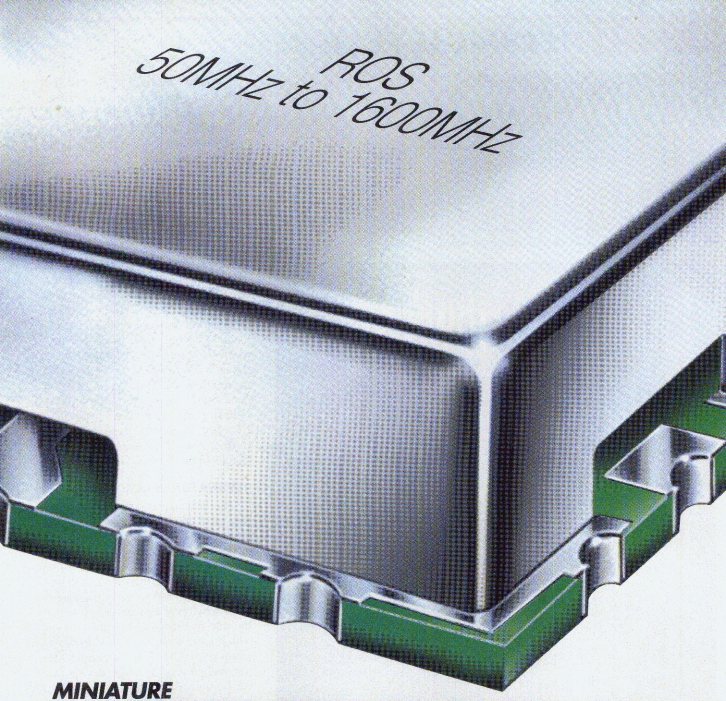


# MINIATURE SURFACE MOUNT VCO's

from $12.95 (qty. 5-49)

The big news is Mini-Circuits miniature family of **50 to 1600MHz** ROS voltage controlled oscillators! Each unit is housed in a shielded 0.5"x0.5"x0.18" non-hermetic industry standard package for highly efficient wash-thru capability, reliability, and cost effectiveness. Models with "PV" suffix typically operate from a 5 volt power supply and require 5V tuning voltage to cover the frequency range. This makes them ideal for integration with monolithic PLL chips and commercial synthesizers working within the 245 to 1600MHz band. The series also features wide band 12V models optimized for 50 to 1410MHz linear tuning, up to one octave band widths, and low phase noise. Support your customers demands for smaller size and better performance, switch to ROS VCO's today!



ACTUAL SIZE

***Mini-Circuits...we're redefining what VALUE is all about!***

ROS SPECIFICATIONS:

| Model | Freq. Range (MHz) | $V_{tune}$ (V) Max. | Phase Noise* (dBc/Hz) Typ. | Harmonics** (dBc) Typ. | Voltage V | Current (mA) Max. | Price $ea. (5-49) |
|---|---|---|---|---|---|---|---|
| ROS-285PV | 245-285 | 5 | -100 | -20 | 5 | 20 | 17.95 |
| ROS-900PV | 810-900 | 5 | -102 | -25 | 4.5 | 12 | 19.95 |
| ROS-960PV | 890-960 | 5 | -102 | -27 | 5 | 12 | 19.95 |
| ROS-1000PV | 900-1000 | 5 | -104 | -33 | 5 | 22 | 19.95 |
| ROS-1600PV | 1520-1600 | 5 | -100 | -26 | 5 | 25 | 18.95 |
| ROS-100 | 50-100 | 17 | -105 | -30 | 12 | 20 | 12.95 |
| ROS-150 | 75-150 | 18 | -103 | -23 | 12 | 20 | 12.95 |
| ROS-200 | 100-200 | 17 | -105 | -30 | 12 | 20 | 12.95 |
| ROS-300 | 150-280 | 16 | -102 | -28 | 12 | 20 | 14.95 |
| ROS-400 | 200-380 | 17 | -100 | -24 | 12 | 20 | 14.95 |
| ROS-535 | 300-525 | 17 | -98 | -20 | 12 | 20 | 14.95 |
| ROS-765 | 485-765 | 16 | -95 | -27 | 12 | 22 | 15.95 |
| ROS-1410 | 950-1410 | 11 | -99 | -8 | 12 | 25 | 19.95 |

*Phase Noise: SSB at 10kHz offset, dBc/Hz. **Specified to fourth.

**Mini-Circuits®**

US 88 INT'L 89
CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *INTERNET* http://www.minicircuits.com

For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE • EEM • MICROWAVE PRODUCT DATA DIRECTORY • WWW.RFGLOBALNET.COM

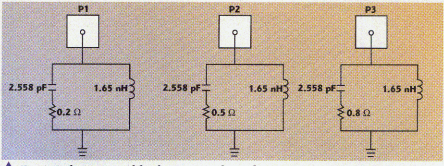


*Fig. 4 Tank circuits used for the Z-magnitude simulation.*

REMEC Nanowave

Choose REMEC Nanowave as part of your Total Microwave Solution

- LMDS Hub Transceivers / LMDS Roof Mounted Electronics
- Thin Film Substrates / Assemblies
- RF to Fiber Assemblies
- Custom MMIC Assembly and Test
- X-Band Commercial Radar Assemblies (30W - 120W)
- Satcom Power Amplifiers
- Passive Millimeterwave Devices
  - High Density Couplers
  - Multi-Way Combiner / Divider
  - Filter Structures

The Total Microwave Solution

Email inquiries to sales@remecnanowave.com
Visit our website at www.reniec.com
416-252-5602

REMEC Nanowave, Inc.
425 Horner Ave., Unit #1
Etobicoke, Ontario M8W4W3
Fax 416.252.7077

REMEC
Building solutions through teamwork.

Care must be used in the selection of the tank circuit's capacitive element. As the capacitor's reactance is reduced, its potential to reduce the unloaded Q of the intrinsic tank resonator is increased. A new line of high Q RF capacitors made by American Technical Ceramics was investigated. It was determined that these RF capacitors displayed an equivalent series resistance (ESR) similar to that of most microwave capacitors at 2.5 GHz but with a substantial reduction in cost. ***Figure 4*** shows the circuits used in the simulation. As the ESR of the capacitors used in the tank increases, the overall Q of the tank will decrease. As the tank's unloaded Q is reduced, its 3 dB bandwidth increases. This characteristic is shown in ***Figure 5*** using single-port Z parameters. The 0.707 point of the Z parameter's magnitude response represents the tank circuit's 3 dB bandwidth. Note how the band edges move out in frequency as the capacitor's ESR increases from 0.2 to 0.8 Ω.

## RESONATOR DECOUPLING

The resonator is now evaluated as a two-port network. Decoupling elements are used to improve the resonator's loaded Q. This configuration provides valuable insight concerning the design of the intended oscillator. One method used to study the loaded Q for a two-port network is to evaluate the rate of change in the phase slope, which can be expressed as dφ/dω or group delay GD. The group delay differentiation process eliminates the linear portion of the phase response and transforms the deviations from linear phase into deviations from constant group delay. It can be shown that the




*Fig. 5 Effects of the capacitor's ESR on the tank circuit's Q.*

*[Continued on page 28]*

# AMPLIFIERS

## for every application

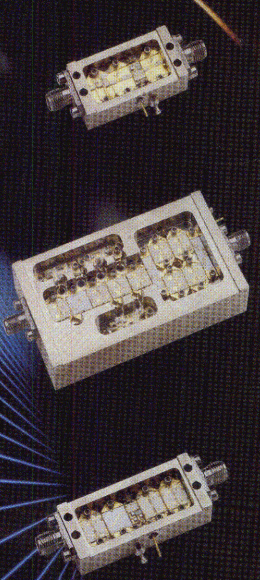

### ULTRA BROAD BAND

| Model | Freq. Range GHz | Gain dB min | N/F dB max | Gain Flat +/-dB | 1 dB Comp. pt. dBm min | 3rd Order ICP typ | VSWR In/Out max | DC Current mA |
|---|---|---|---|---|---|---|---|---|
| JCA018-203 | 0.5-18.0 | 20 | 5.0 | 2.5 | 7 | 17 | 2.0:1 | 250 |
| JCA018-204 | 0.5-18.0 | 25 | 4.0 | 2.5 | 10 | 20 | 2.0:1 | 300 |
| JCA218-506 | 2.0-18.0 | 35 | 5.0 | 2.5 | 15 | 25 | 2.0:1 | 400 |
| JCA218-507 | 2.0-18.0 | 35 | 5.0 | 2.5 | 18 | 28 | 2.0:1 | 450 |
| JCA218-407 | 2.0-18.0 | 30 | 5.0 | 2.5 | 21 | 31 | 2.0:1 | 500 |

### MULTI OCTAVE AMPLIFIERS

| Model | Freq. Range GHz | Gain dB min | N/F dB max | Gain Flat +/-dB | 1 dB Comp. pt. dBm min | 3rd Order ICP typ | VSWR In/Out max | DC Current mA |
|---|---|---|---|---|---|---|---|---|
| JCA04-403 | 0.5-4.0 | 27 | 5.0 | 1.5 | 17 | 27 | 2.0:1 | 550 |
| JCA08-417 | 0.5-8.0 | 32 | 4.5 | 1.5 | 17 | 27 | 2.0:1 | 550 |
| JCA28-305 | 2.0-8.0 | 22 | 5.0 | 1.0 | 20 | 30 | 2.0:1 | 350 |
| JCA212-503 | 2.0-12.0 | 32 | 5.0 | 3.0 | 14 | 24 | 2.0:1 | 550 |
| JCA618-406 | 6.0-18.0 | 20 | 6.0 | 2.0 | 25 | 35 | 2.0:1 | 600 |
| JCA618-507 | 6.0-18.0 | 25 | 6.0 | 2.0 | 27 | 37 | 2.0:1 | 800 |

### MEDIUM POWER AMPLIFIERS

| Model | Freq. Range GHz | Gain dB min | N/F dB max | Gain Flat +/-dB | 1 dB Comp. pt. dBm min | 3rd Order ICP typ | VSWR In/Out max | DC Current mA |
|---|---|---|---|---|---|---|---|---|
| JCA12-P01 | 1.35-1.85 | 35 | 4.0 | 1.0 | 33 | 41 | 2.0:1 | 1000 |
| JCA34-P02 | 3.1-3.5 | 40 | 4.5 | 1.0 | 37 | 45 | 2.0:1 | 2200 |
| JCA56-P01 | 5.9-6.4 | 30 | 5.0 | 1.0 | 34 | 42 | 2.0:1 | 1200 |
| JCA812-P03 | 8.0-12.0 | 40 | 5.0 | 1.5 | 33 | 40 | 2.0:1 | 1700 |
| JCA1218-P02 | 12.0-18.0 | 22 | 4.0 | 2.0 | 25 | 35 | 2.0:1 | 700 |

### LOW NOISE OCTAVE BAND LNA'S

| Model | Freq. Range GHz | Gain dB min | N/F dB max | Gain Flat +/-dB | 1 dB Comp. pt. dBm min | 3rd Order ICP typ | VSWR In/Out max | DC Current mA |
|---|---|---|---|---|---|---|---|---|
| JCA12-3001 | 1.0-2.0 | 40 | 0.8 | 1.0 | 10 | 20 | 2.0:1 | 200 |
| JCA24-3001 | 2.0-4.0 | 32 | 1.2 | 1.0 | 10 | 20 | 2.0:1 | 200 |
| JCA48-3001 | 4.0-8.0 | 40 | 1.3 | 1.0 | 10 | 20 | 2.0:1 | 200 |
| JCA812-3001 | 8.0-12.0 | 32 | 1.8 | 1.0 | 10 | 20 | 2.0:1 | 200 |
| JCA1218-800 | 12.0-18.0 | 45 | 2.0 | 1.0 | 10 | 20 | 2.0:1 | 250 |

### NARROW BAND LNA'S

| Model | Freq. Range GHz | Gain dB min | N/F dB max | Gain Flat +/-dB | 1 dB Comp. pt. dBm min | 3rd Order ICP typ | VSWR In/Out max | DC Current mA |
|---|---|---|---|---|---|---|---|---|
| JCA12-1000 | 1.2-1.6 | 25 | 0.75 | 0.5 | 10 | 20 | 2.0:1 | 80 |
| JCA23-302 | 2.2-2.3 | 30 | 0.8 | 0.5 | 10 | 20 | 2.0:1 | 80 |
| JCA34-301 | 3.7-4.2 | 30 | 1.0 | 0.5 | 10 | 20 | 2.0:1 | 90 |
| JCA56-401 | 5.4-5.9 | 40 | 1.0 | 0.5 | 10 | 20 | 2.0:1 | 120 |
| JCA78-300 | 7.25-7.75 | 27 | 1.2 | 0.5 | 13 | 23 | 2.0:1 | 120 |
| JCA910-3000 | 9.0-9.5 | 25 | 1.2 | 0.5 | 13 | 23 | 1.5:1 | 150 |
| JCA910-3001 | 9.5-10.0 | 25 | 1.2 | 0.5 | 13 | 23 | 1.5:1 | 150 |
| JCA1112-3000 | 11.7-12.2 | 27 | 1.1 | 0.5 | 13 | 23 | 1.5:1 | 150 |
| JCA1213-3001 | 12.2-12.7 | 25 | 1.3 | 0.5 | 10 | 20 | 2.0:1 | 200 |
| JCA1415-3001 | 14.4-15.4 | 35 | 1.4 | 1.0 | 14 | 24 | 2.0:1 | 200 |
| JCA1819-3001 | 18.1-18.6 | 25 | 1.8 | 0.5 | 10 | 20 | 2.0:1 | 200 |
| JCA2021-3001 | 20.2-21.2 | 25 | 2.0 | 0.5 | 10 | 20 | 2.0:1 | 200 |

JCA TECHNOLOGY

**DELIVERY IN 2-4 WEEKS ARO**

4000 Via Pescador, Camarillo, CA 93012
(805) 445-8688 Fax: (805) 987-6990
email: jca@jcatech.com • www.jcatech.com

**Features:**

- Removable SMA Connectors
- Competitive Pricing
- Compact Size

**Options:**

- Alternate Gain, Noise, Power, VSWR levels if required
- Temperature Compensation
- Gain Control

JCA's Catalog can now be downloaded from the Web at *www.jcatech.com*

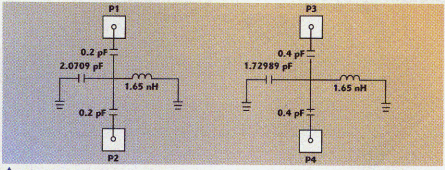


▲ *Fig. 6 The decoupled resonators.*

PCS Band Amplifier
QBH-8756




Choose REMEC Q-bit as part of your Total Microwave Solution

- High dynamic range
  - < 1.2 dB noise figure
  - > +36 dBm OIP3
- Surface mount
- Tinned copper heat spreader
- Tape and reel available

Frequency 1850 - 1910 MHz
Gain 22.5 ± 0.5 dB
Gain Flatness ≤ 0.7 dB p-p
Third OIP +36 dBm
VWSR In & Out 1.5:1
P1dB 22 dBm min
DC Power 15 Vdc, 200 mA typ
Temperature -20 to +85°C

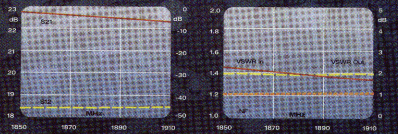


The Total Microwave Solution

Email inquiries to sales@remecq-bit.com
Visit our website at www.remecq-bit.com
1-800-226-1772

REMEC Q-bit, Inc.
2144 Franklin Drive
Palm Bay, FL 32905-4021
Fax 321.727.3729

REMEC
Building solutions through teamwork.

loaded Q is related to the group delay by $Q_{loaded} = \pi f_0 GD$. Group delay is the rate of change in the phase of the forward transmission coefficient vs. frequency. The nice thing about using group delay as a figure of merit in resonator design is that it can be evaluated with a simulator such as Microwave Harmonica and also measured on the bench with a network analyzer. Note that the end coupling capacitors used increase the capacitive loading on the tank resonator. This effect requires the capacitor(s) in the tank circuit to be tweaked in order to re-center the resonator's center frequency.

To examine the trade-offs concerning insertion loss and loaded Q, a swept display of several decoupled resonators is shown. Different degrees of decoupling were used, as shown in ***Figure 6***. The 1.65 nH inductor is held constant while the tank's capacitor is adjusted to center the frequency at 2.5 GHz. The simulation results shown in ***Figure 7*** clearly display the increase in both group delay and insertion loss as the amount of decoupling is increased. The degree of decoupling used in the final oscillator is a

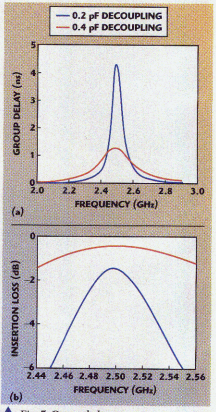


▲ *Fig. 7 Decoupled resonator performance; (a) group delay and (b) insertion loss.*

*[Continued on page 30]*

# a Wide Range of
# Quality Attenuators
## Step-Rotary / Continuously Variable / Fixed Coaxial

Designed by KMW for consistency and stability, these Attenuators will be your first choice for building wireless communication system applications



KAT2DO4SA000
KAT1DO4SA002

## Step-Rotary Attenuators

| Product Code No. | KAT2DO4SA000 | KAT1DO4SA002 |
|---|---|---|
| Operating Type | Make-Before-Break | |
| Frequency Range | DC ~ 3GHz | DC ~ 3GHz |
| Insertion Loss (Max.) | 0.2dB | 0.2dB |
| VSWR (Max.) | 1.15:1 | 1.15:1 |
| Incremental Attenuation Range (dB) | 0 ~ 1 | 0 ~ 10 |
| Attenuation Step (dB) | 0.2 | 1 |
| Nominal Impedance | 50 ohm | |
| I/O Port Connector | SMA(F) / Right Angle SMA(F) | |
| Average Power Handling | 1W @ 2GHz | |
| Temperature Range | -30˚C ~ +80˚C | |
| Dimension (inch) | 1.925*1.567*2.224 | |



KAT13O4CA000



KAT13O4CA001

## Continuously Variable Attenuators

| Product Code No. | A type : KAT13O4CA000<br>B type : KAT13O4CA001 | | |
|---|---|---|---|
| Frequency Range | DC ~ 1GHz | 1 ~ 2GHz | 2 ~ 3GHz |
| Insertion Loss (Max.) | 0.15dB | 0.3dB | 0.35dB |
| VSWR (Max.) | 1.25:1 | 1.25:1 | 1.25:1 |
| Attenuation Range (Min.) | 13dB @ 2GHz | | |
| Nominal Impedance | 50 ohm | | |
| I/O Port Connector | SMA(F) / SMA(F) | | |
| Average Power Handling | 2W @ 2GHz / 25˚C, without Heat-Sink | | |
| Temperature Range | -55˚C ~ +85˚C | | |
| Dimension (inch) | A type : 1.496*1.102*0.457<br>B type : 1.224*1.102*0.457 | | |

## Fixed Coaxial Attenuators are available

N-type, SMA-type Connectors



13131 East 166th Street, Cerritos, CA 90703-2202
1-800-8320-KMW • www.kmwinc.com
tel: 562-926-2033 • fax: 562-926-6133

KMW
RF & Microwave Products

trade-off between the goals of adequate start-up gain and maintaining the resonator's loaded Q.

## GAIN BLOCK DESIGN

Often a discrete transistor can provide a much more cost-effective solution than a MMIC. Although a little more work is involved in designing an oscillator using a discrete solution, it is well worth it if low cost is a primary design concern. It is also advisable (although not necessary) to use a device that presents a reasonable degree of match at the intended frequency of oscillation. The device's close match helps to ease the oscillator's gain requirements.

A network that can provide for good spurious suppression should surround the transistor and usually produces unconditional stability at low RF frequencies. At lower frequencies, simple resistor biasing can be used to accomplish this goal. As the frequency increases, it is advisable to use choke biasing networks in order to avoid degrading the gain of the transistor any more than need be. A useful method for preventing moding is to use resistive loading at out-of-band frequencies. This configuration is used so as not to degrade the gain at the desired frequency. A resistor in the DC biasing network also can be used for the prevention of spurious moding. This goal is accomplished using a 51 Ω resistor. ***Figure 8*** shows the intended gain block.




▲ *Fig. 8 The gain block's schematic.*

The required biasing current has a strong effect on the oscillator's close-in noise performance. As the bias current is increased, the close-in phase noise that results from the device transposing low frequency baseband noise is degraded. This low frequency AM and PM noise is converted into frequency fluctuations at the carrier by a nonlinear mixing process. This type of noise is referred to as 1/f noise. In addition, as the bias current is increased the device's noise figure also increases, further degrading the oscillator's noise performance. This result is due to a decrease in the oscillator's SNR. Contrasting the goals of minimizing the transistor's bias current to reduce noise is the fact that the signal portion of the oscillator's SNR is improved with increased bias current. This effect occurs because the absolute value for the noise sidebands does not vary with the signal level produced by the oscillator. It has been noted that both noise figure and low frequency 1/f noise (flicker noise) are not affected significantly by an increase in the bias voltage.

After evaluating cost and performance for various families of transistors, an NE6X6-type device was chosen. These transistors are reasonably priced, and data from the manufacturer show that the NE6X6 devices have both low noise figure and low 1/f noise characteristics. The transistor's $V_{CEO}$ (collector to emitter breakdown voltage with the base held open) is 6 V DC. With $V_{CE}$ set to 3 V, there is ample margin for peak-to-peak variations in the steady-state signal.




▲ *Fig. 9 The initial oscillator schematic.*

It was decided to use the simple biasing network shown previously to reduce circuit complexity and cost. A DC bias current of approximately 10 mA was used to determine a balance for the various noise-related bias concerns. In addition, S-parameter data with 10 mA bias are available from the manufacturer for the entire 6X6 family of transistors.

## SUBSTRATE CONSIDERATIONS

Since the design frequency is 2.45 GHz, the PCB material is a significant consideration. In this application it is considered preferable that the utilized material be very inexpensive and provide a well-controlled dielectric constant. This characteristic is required because the printed portion of the circuit is used to control the amount of phase lag between the transistor and resonator. Since the printed portion of the circuit exhibits only a relatively minimal effect on the resonator's loaded Q and loop gain, the attenuation resulting from the substrate's dielectric losses was not considered overly critical. After evaluating several options, including various sources of FR4 material, it was decided to use a low cost material available from GIL Technologies with a dielectric constant of 3.86 ±0.08. In addition, the substrate material is available for approximately the same price as FR4.

## THE FINAL CONFIGURATION

Having chosen the topology, a linear simulation was performed. This procedure allows for precise adjustments in the phase for the intended design. A 2 pF capacitor located at the collector is used to couple the signal to the 50 Ω load. The initial schematic for the oscillator is shown in ***Figure 9***. A break in the circuit is produced in order to enable a two-port analysis technique to be used. It is best to make the break at a point in the circuit where a reasonable degree of match exists. The goal is to adjust the decoupling capacitors C2 and C3 to allow enough gain for the start-up condition while minimizing the degradation to the loaded Q. The desired gain margin for the open loop in this design is between 3 and 4 dB. A minimum of 3 dB is suggested for adequate start-up gain. The 4 dB maximum is recommended to prevent the transistor from hard limiting any more than necessary. As the transistor is driven harder into limiting, it will tend to increase the production of undesired harmonics. Reducing the loop gain also helps reduce the change in the transmission phase during the oscilla-

*[Continued on page 32]*

# CRANK IT UP




## Need Higher Power? You need Watkins-Johnson's new AH11 amplifier.




**Ultra high IP3** is what our new **AH11** is all about. Combined with a very low noise figure, it's the perfect choice for today's multichannel wireless systems. Drawing only 600mA, the AH11 delivers 17dBm of linear output power with an IP3 of 50dBm. A great price combined with the outstanding linear efficiency makes this versatile amplifier perfect for multiple sockets, reducing overall part count.

**Need Lower Power?** Both the **AH1** and **AM1** offer low noise figures which, together with their inherent high IP3, deliver superior performance at the best price in the industry.

For more details, call our toll free number or fax us at 650-813-2447. Email us at wireless.info@wj.com to request data sheets and a complete catalog.

**WJ High Dynamic Range Amplifiers**

| Product | Frequency (MHz) | IP3 (dBm, typ.) | P1dB (dBm, typ.) | NF (dB, typ.) | Bias current (mA, typ.) |
|---|---|---|---|---|---|
| AH11 | 250-3000 | 47 | 27 | 3.7 | 900 |
| AH1 | 250-3000 | 41 | 21 | 2.9 | 150 |
| AM1 | 250-3000 | 36 | 18 | 2.6 | 75 |

*The Communications Edge*™

Visit us on the web at www.wj.com

**1-800-WJ1-4401**

WATKINS-JOHNSON

**Distributed In U.S.A. by Nu Horizons Electronics:** 888-747-6846; **Richardson Electronics:** 800-348-5580

**In Europe call WJ:** +44-1252-661761 or your local Richardson Electronics Office: **France:** (01) 55 66 00 30; **Germany:** (089) 890 214 0; **Italy:** (055) 420 10 30 **UK:** (01753) 733010

tor's transition from small-signal to large-signal conditions.

It is critical for the transmission phase to be 0° at the peak of the resonator magnitude response. It has been shown that degradation in the resulting noise sidebands due to nonoptimal transmission phase is related by $40\log(\cos\theta)$.[8] The microstrip transmission lines are used to adjust transmission phase. After simulating the intended oscillator design with various transistors from the NE6X6 family it was determined that the model NE696M01 device would produce the required start-up gain. The $f_t$ for the NE696M01 transistor is 14 GHz with a 3 V, 10 mA bias. This $f_t$ is somewhat higher than desired for a 2.45 GHz oscillator and is typical of the type of trade-offs involved in oscillator design. The simulation of the intended oscillation is shown in ***Figure 10***. A 50 Ω, 0.61 λ length of microstrip is used to bring the transmission phase to 0° at 2.45 GHz. The gain response is peaked at 2.45 GHz. A gain of 2.63 dB is a bit low but considered enough for start-up concerns. The simulator shows that the group delay is 4.67 ns. The loaded Q for the small-signal simulation is approximately 36. (This Q value shows the potential for low noise performance.) The goals for the initial simulation stage of the oscillator design have been achieved.




▲ *Fig. 10 The open-loop simulation.*

## TUNING CONSIDERATIONS

Tuning of the oscillator's center frequency is accomplished by using a varactor tuning diode. Since the cost of the components becomes a critical concern the tolerance used is often not as tight as that of more extensive components. As an example, a 0.2 pF capacitor nearly doubles in price as the component tolerance is increased from ±0.1 to ±0.05 pF. It is advisable to allow for deviation in the center frequency as a result of component variations when evaluating tuning options. This design is intended for use in security sensor applications and is required to tune from 2.435 to 2.465 GHz. The oscillator's tuning bandwidth must extend far enough on either side of these band edges to account for all of the component tolerance variations. This concern must be juggled with the fact that the tuning diode's noise contribution is magnified as its tuning gain is increased. The tuning gain is simply df/dV. The tuning diode is decoupled to reduce its tuning gain by using a capacitive series combination in the resonator tank circuit. One of these capacitors is the tuning diode.

The tuning diode's effect on the oscillator's phase noise performance can vary greatly depending on the type of tuning diode used, its tuning gain and its Q. The modulation noise produced by the tuning diode is summed with the noise sidebands of the oscillator and can degrade the oscillator's phase noise performance. Much of this noise is due to the modulation of the tuning diode junction capacitance by baseband noise. Reducing the baseband biasing resistance helps to reduce varactor modulation noise. In this design the varactor biasing resistor is only 200 Ω. In addition, using a varactor with a less abrupt tuning curve reduces the tuning diode's nonlinearity. However, as the tuning curve becomes less abrupt, tuning linearity may be sacrificed. Furthermore, the tuning diode's series resistance degrades the oscillator's loaded Q. It is suggested that samples of various tuning diodes be evaluated on the test bench prior to final selection.

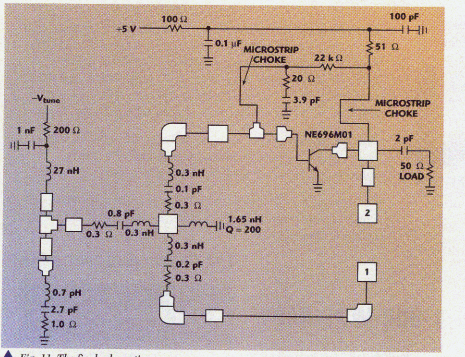


▲ *Fig. 11 The final schematic.*

## THE FINAL PROTOTYPE

The final schematic is shown in ***Figure 11***. The rest of the microstrip has been added, and provisions for the tuning diode have been made. The phase has been tweaked to adjust for various distributed discontinuities and parasitic reactances. Low inductance microwave grounding is maintained by using 31-mil-diameter vias to decouple all lumped components.

Having established a promising design with the simulator, the prototype VCO was constructed. An HP 8720B vector network analyzer (VNA) was used to evaluate the open-loop oscillator. The number of test frequency points determines the minimum resolution when recording group delay data on the VNA. This resolution is then increased from minimum by varying the VNA's smoothing aperture. In this way the best possible display of group delay is obtained. A display of the oscillator group delay and insertion loss is

*[Continued on page 36]*

innovation #5

# first C/N generator and Multi-Path Fading Simulator integrated into a one-box solution

**Simplified testing for CDMA.**

Until now: Testing noise and channel simulation for CDMA systems required 2 to 3 separate test instruments. Micronetics has changed all of that with the new CNG-FS. The CNG-FS takes the two most desired functions in CDMA communications equipment testing, guassian noise generation and multi-path fading, and integrates them into one, easy-to-use instrument. Today, it tests CDMA J-STD-018/019 for base stations and handsets, and it is ready to accommodate future 3G standards. The CNG-FS eliminates the hassle of setting amplitude levels between fading simulators and AWGN generators, and it simplifies calibration, resulting in reduced test time and development/ manufacturing costs. If you're looking for an alternative in noise and fading testing, take a look at Micronetics. For more information, call (603) 883-2900 ext. 312 or visit our web site, www.micronetics.com.

NEW!

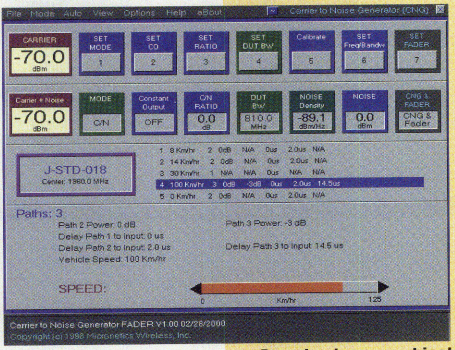


**Download our graphical user interface by going to www.micronetics.com.**

**innovation for the future™**

MICRONETICS
test equipment
26 Hampshire Drive, Hudson, NH 03051

CIRCLE 71 ON READER SERVICE CARD

# *Ericsson Delivers GOLDMOS™ FETs*

| Product Number | Frequency Mhz | $P_{OUT}$ Watts | Gain dB | Supply Voltage | Package Number | Internal Matching |
|---|---|---|---|---|---|---|
| **To 1.0 GHz — GOLDMOS FET** | | | | | | |
| PTF 10136 | 1000 | 6 | 18.0 | 28 | 20244 | N |
| PTF 10147 | 1000 | 10 | 15.0 | 26 | 20244 | N |
| PTF 10137 | 1000 | 12 | 13.0 | 28 | 20244 | N |
| PTF 10007 | 1000 | 35 | 12.0 | 28 | 20222 | N |
| PTF 10052 | 1000 | 35 | 12.0 | 28 | 20235 | N |
| PTF 10015 | 1000 | 50 | 12.0 | 28 | 20235 | N |
| PTF 10031 | 1000 | 50 | 12.0 | 28 | 20222 | N |
| PTF 10139* | 1000 | 60 | 12.0 | 28 | 20235 | N |
| PTF 10138* | 1000 | 60 | 12.0 | 28 | 20222 | N |
| PTF 10009 | 1000 | 85 | 12.0 | 28 | 20230 | N |
| PTF 10049 | 470–860 | 85 | 12.0 | 32 | 20240 | I |
| PTF 10159 | 470–860 | 120 | 12.0 | 32/28 | 20240 | I |
| PTF 10019 | 860–900 | 70 | 13.0 | 28 | 20237 | I |
| PTF 10133 | 860–900 | 85 | 13.0 | 28 | 20237 | I |
| PTF 10100 | 860–900 | 165 | 12.0 | 28 | 20250 | I |
| PTF 10162 | 860–960 | 18 | 14.0 | 26 | 20222 | N |
| PTF 10036 | 860–960 | 85 | 11.0 | 28 | 20240 | I |
| PTF 10160* | 860–960 | 85 | 15.0 | 26 | 20248 | I/O |
| PTF 10020 | 860–960 | 125 | 11.0 | 28 | 20240 | I |
| PTF 10149 | 921–960 | 70 | 15.0 | 26 | 20252 | I |
| **1.0–2.2 GHz — GOLDMOS FET** | | | | | | |
| PTF 10111 | 1500 | 6 | 15.0 | 28 | 20222 | N |
| PTF 10107 | 2000 | 5 | 11.0 | 26 | 20244 | N |
| PTF 10135 | 2000 | 5 | 11.0 | 26 | 20249 | N |
| PTF 10041* | 2000 | 12 | 10.0 | 26 | 20249 | N |
| PTF 10053 | 2000 | 12 | 10.0 | 26 | 20244 | N |
| PTF 10021 | 1400–1600 | 30 | 11.0 | 28 | 20237 | I/O |
| PTF 10125 | 1400–1600 | 135 | 11.5 | 28 | 20250 | I/O |
| PTF 10045 | 1600–1650 | 30 | 10.0 | 28 | 20222 | N |
| PTF 10112 | 1800–2000 | 60 | 11.0 | 28 | 20248 | I/O |
| PTF 10153* | 1800–2000 | 60 | 12.5 | 28 | 20248 | I/O |
| PTF 10120 | 1800–2000 | 120 | 10.0 | 28 | 20250 | I/O |
| PTF 10043 | 1900–2000 | 12 | 11.0 | 26 | 20222 | I |
| PTF 10035 | 1900–2000 | 30 | 11.0 | 28 | 20237 | I/O |
| PTF 10123* | 2100–2200 | 5 | 11.0 | 28 | 20244 | N |
| PTF 10119 | 2100–2200 | 12 | 10.0 | 28 | 20222 | I |
| PTF 10048 | 2100–2200 | 30 | 10.0 | 28 | 20237 | I/O |
| PTF 10122 | 2100–2200 | 50 | 10.0 | 28 | 20248 | I/O |
| PTF 10134* | 2100–2200 | 100 | 10.0 | 28 | 20250 | I/O |

Packages are not to scale.


20222


20230


20235


20237


20240


20244


20248


20249


20250


20252

Note: An "*" next to the product part number indicates the specifications are preliminary and subject to change without notice. Please contact your sales representative for further product information. Complete product information is available on our Website at: www.ericsson.com/rfpower.

# No tricks required to get your catalog.

# With Ericsson a simple request is all it takes to get the information you need.




*To receive your Ericsson catalog, short form or interactive CD-ROM, Visit our website at* ***www.ericsson.com/rfpower*** *or Email us at rfpower@ericsson.com.*

*Delivering Technology Choices*

Ericsson Microelectronics
*RF Power Products*
1-877 GOLDMOS (465-3667) United States
+46 8 757 4700 International

CIRCLE 44 ON READER SERVICE CARD

ERICSSON




*Fig. 12 The oscillator's (a) insertion loss and (b) group delay.*

*Fig. 13 The oscillator's (a) input and (b) output return losses.*




*Fig. 14 The oscillator's phase noise at 2.45 GHz in a 1 kHz RBW with 20 dB input attenuation.*




shown in ***Figure 12***. The magnitude of both transmission responses is peaked at the intended frequency of oscillation. The input and output return loss of the resonator is shown in ***Figure 13***. The low reflections measured at the resonant frequency validate the VNA analysis technique. Having analyzed the group delay, the actual loaded Q is determined to be 26. This value is 25 percent lower than the original simulated value and is attributed to slightly tighter coupling in the actual circuit. However, a loaded Q of 26 is considered respectable for such a low cost design and justifies the resonator selection.




*Fig. 15 The oscillator's harmonics.*

*Fig. 16 The oscillator's output frequency vs. tuning voltage.*




After evaluation of the oscillator with the network analyzer, the closed-loop analysis is performed and the complete circuit is assembled. The output power and phase noise were measured. ***Figure 14*** shows the phase noise to be –95 dBc at 10 kHz offset using a 1 kHz resolution bandwidth. This noise level is considered more than adequate for most communication receiver applications. The output power is 5.2 dBm at 2.45 GHz, which is a respectable signal level. The resulting RF-to-DC efficiency is greater than nine percent. The VCO's harmonics are shown in ***Figure 15***. It is apparent by the fact that the second harmonic is down by approximately 20 dB that the emission's performance is quite satisfactory. By varying the tuning voltage between 3.3 and 5.9 V the frequency changed linearly from 2.41 to 2.49 GHz. ***Figure 16*** shows the output frequency vs. applied tuning voltage. Across this tuning span the output power varied by only 1.3 dB and variations in phase noise were measured to be less than 2 dB. Tuning was accomplished using a low cost SMV1234-079 tuning diode from Alpha Industries. A second oscillator was built and tested in order to verify the design. (The test results were nearly identical.) Using typical high volume pricing this circuit was built for less than $1.30.

## CONCLUSION

A design technique for using a commercially available simulator (Microwave Harmonica) to evaluate low cost options for a 2.45 GHz oscillator has been demonstrated. The design was later analyzed on the bench using a VNA and spectrum analyzer and was shown to display low phase noise, linear tuning and low harmonic emissions. The output power was verified to be more than adequate for many applications. The only on-the-bench optimization was to the tuning diode used. A practical microwave oscillator design has been demonstrated.

## ACKNOWLEDGMENT

Thanks go to Walter Budziak and Steve Carlini for help in reviewing this article, and to Jayanti Venkataraman at the Rochester Institute of Technology for the use of the microwave laboratory. Thanks also go to Jerry Hiller of Alpha Industries, Rick Cory of M/A-COM and Olivier Bernard of California Eastern Labs for discussions concerning the various microwave semiconductor noise mechanisms, and to Bill Dipoala for encouraging new product development at Detection Systems. ■

## References:

1. D.B. Leeson, "A Simple Model of Feedback Oscillator Noise Spectrum," *Proceeding of the IEEE*, Vol. 54, February 1966, pp. 329–330.
2. Randall W. Rhea, *Oscillator Design and Computer Simulation*, Megraw Hill, 1995.
3. George Vendilin, Anthony M. Pavio and Uldrich L. Rohde, *Microwave Circuit Design Using Linear and Nonlinear Techniques*, John Wiley and Sons, 1990.
4. Application Note AN1026, *1f Noise Characteristics Influencing Phase Noise*, California Eastern Labs.
5. *Vector Measurements of High Frequency Networks*, Hewlett-Packard, April 1989.
6. Jeremy K.A. Everard, "Low Noise Oscillators," *IEEE Transactions on Microwave Theory and Techniques*, 1992, pp. 1077–1080.
7. M.J. Underhill, "The Need for Better Varactor Diodes in Low Phase Noise Tunable Oscillators," *IEE Colloquium*, December 1998, pp. 5/1–5/6.

***Jim Carlini** has been in the field of RF electronics since 1950 and is currently an RF design engineer at Detection Systems. He spent many years working on microwave receivers for the government and defense electronics industry, and now designs wireless UHF data links as well as S- and X-band microwave sensor products for security applications. One of his main responsibilities is the investigation of low cost design solutions. Carlini's primary interest is in microwave electronics.*

*Board layout issues, insertion loss optimizing and power handling challenges were as real in 1973 as they are today. That's when Sage patented Wireline technology. Originally created to provide jumper style board design flexibility, engineers found the balanced, twin conductor technique offered many other design performance and cost advantages. Its popularity flourished in the 1970's with many important programs employing it. The advent of surface mount technology and the push for automated assembly in the '80's tempered its use, as companies sacrificed performance for production speed. But next generation cellular and PCS applications are creating new design challenges. And today's professional is finding surface mount devices still can't match the insertion loss, power handling and flexibility of this proven technology. Packaging variations and enhanced automation capabilities are making it a born again staple of wireless design.*

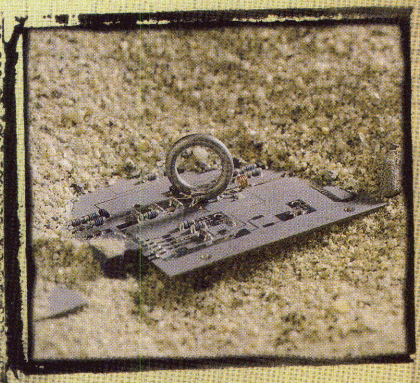



# REDISCOVERING THE CLASSIC PERFORMANCE OF THE TWISTED PAIR

**Wireline® and Wirepac®** hybrids and couplers are still the ideal solution for many of today's high performance amplifier designs. This proven 4-port technology offers insertion loss as low as 0.1 dB and isolation values as high as 30 dB. Average power handling is as high as 200 Watts for Wireline, and 500 Watts for Wirepac.

Wireline can be delivered in bulk lengths or cut to size in narrow or octave band versions with 2.7, 3 and 10 dB coupling values. Wirepac offers a variety of solid casing and flange mount options. Plus, premier power handling and varied coupling factors up to 18 GHz.

Log on to a classic discovery and get your free Wireline Kit — it includes a Designer's Guide, a useful slide rule, and a custom cut sample to your frequency.

**www.sagelabs.com**

sage LABORATORIES, INC.

*A Filtronic plc Company*

11 Huron Drive, Natick, MA 01760 • 508-653-0844 • Fax 508-653-5671

CIRCLE 143 ON READER SERVICE CARD

# PREPARE FOR THE NEXT GENESYS

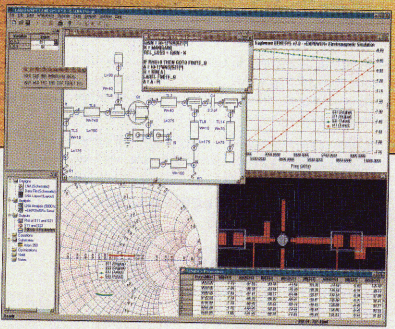

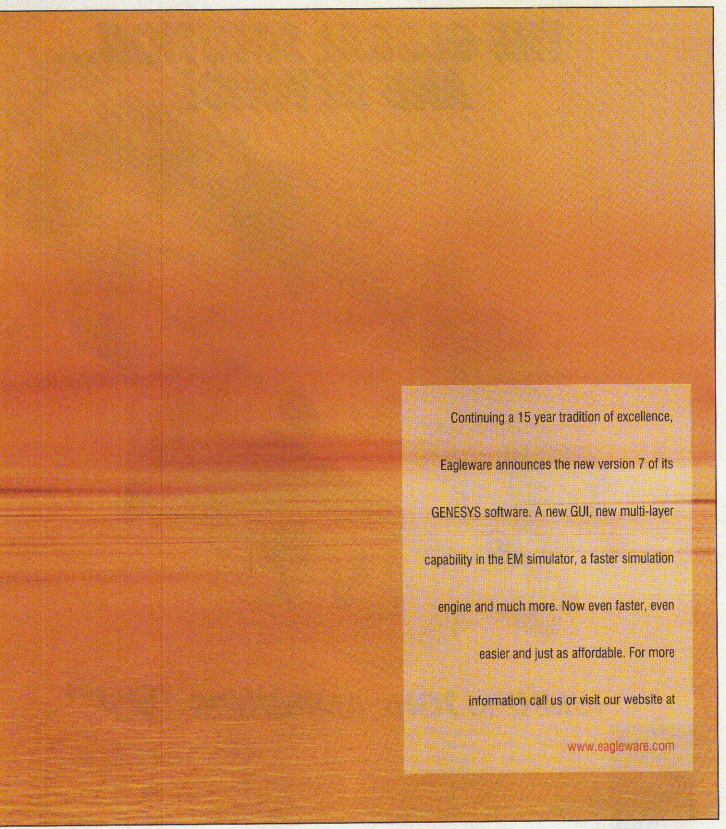


**fast, easy, affordable**

**EAGLEWARE**

**RF and Microwave Design Software**

tel: 770.939.0156 | fax: 770.939.0157

CIRCLE 41 ON READER SERVICE CARD

# THE GLOBAL SOLUTION... AND BEYOND!




## 10MHz to 7GHz AMPLIFIERS from $99.95 (1-9 qty.)



From amateur radio to cellular to satellite applications, with medium output power up to 17dBm, Mini-Circuits versatile ZJL and ZKL connectorized amplifiers offer the broad range of choices designers demand for achieving high system performance goals. Ultra-wideband models deliver **gain ranging from 9 to 40dB** and IP3 up to +32dBm. But beyond the performance and reliability built into these miniature 12V amplifiers lies another important feature, the low price...from only $99.95! Call now for fast delivery.

*Mini-Circuits...we're redefining what VALUE is all about!*

**SPECIFICATIONS**

| Model | Freq (MHz) | Gain (typ) Midband (dB) | Gain (typ) Flat (±dB) | Max. $P_{out}$[1] (dBm) | Dynamic Range (Typ @2GHz[2]) NF(dB) | Dynamic Range (Typ @2GHz[2]) IP3(dBm) | I(mA)[3] | Price Sea. (1-9) |
|---|---|---|---|---|---|---|---|---|
| ZJL-5G | 20-5000 | 9.0 | ±0.55 | 15.0 | 8.5 | 32.0 | 80 | 129.95 |
| ZJL-7G | 20-7000 | 10.0 | ±1.0 | 8.0 | 5.0 | 24.0 | 50 | 99.95 |
| ZJL-4G | 20-4000 | 12.4 | ±0.25 | 13.5 | 5.5 | 30.5 | 75 | 129.95 |
| ZJL-6G | 20-6000 | 13.0 | ±1.6 | 9.0 | 4.5 | 24.0 | 50 | 114.95 |
| ZJL-4H3 | 20-4000 | 17.0 | ±1.5 | 15.0 | 4.5 | 30.5 | 75 | 129.95 |
| ZJL-3G | 20-3000 | 19.0 | ±2.2 | 8.0 | 3.8 | 22.0 | 45 | 114.95 |
| ZKL-2R7 | 10-2700 | 24.0 | ±0.7 | 13.0 | 5.0 | 30.0 | 120 | 149.95 |
| ZKL-2R5 | 10-2500 | 30.0 | ±1.5 | 15.0 | 5.0 | 31.0 | 120 | 149.95 |
| ZKL-2 | 10-2000 | 33.5 | ±1.0 | 15.0 | 4.0 | 31.0 | 120 | 149.95 |
| ZKL-1R5 | 10-1500 | 40.0 | ±1.2 | 15.0 | 3.0 | 31.0 | 115 | 149.95 |

NOTES:
1. Typical at 1dB compression.
2. ZKL dynamic range specified at 1GHz.
3. All units at 12V DC.




**Mini-Circuits®**

US 90 INTL 91 CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718)332-4661 *INTERNET* http://www.minicircuits.com

For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE • EEM • MICROWAVE PRODUCT DATA DIRECTORY • WWW.RFGLOBALNET.COM

ISO 9001 CERTIFIED





## Pentagon Releases Leading US Military Contractor Rankings for 1999

According to a report issued by the Pentagon, Lockheed Martin Corp., manufacturer of the F-16 and other military aircraft and weapons systems, ranked first among US military contractors in 1999, receiving $12.7 B worth of prime contracts from the Department of Defense (DoD). Boeing Co., manufacturer of the F-15 fighter, placed second in the rankings with prime contracts totaling $10.9 B followed by Raytheon Corp., General Dynamics Corp., Northrop Grumman Corp. and United Technologies Corp. The top six 1999 defense contractors held the same positions in the 1998 rankings. Advanced electronic system provider Litton Industries Inc. jumped from eighth to seventh place with contracts totaling $2.1 B in 1999, compared to $1.6 B in 1998. General Electric Co. finished eighth ($1.7 B) followed by TRW Inc. and Textron Inc. who tied for ninth place with $1.4 B in contracts. Overall, DoD contracts awarded in 1999 to US contractors totaled $125 B, compared to $118.1 B in 1998.

## Space Mission to Produce New Topographical Earth Map

According to the Associated Press, the National Aeronautics and Space Administration (NASA) is attempting to produce new topographical maps of the earth by extending a radar antenna boom from the Endeavour space shuttle. The 197-foot radar antenna boom will be the longest rigid structure ever deployed in space, allowing scientists to measure the highs and lows of the earth's terrain with exceptional accuracy for environmental and military purposes. Once fully deployed, NASA expects that scientists will be able to map more than 70 percent of the earth's terrain, collecting enough data to occupy 13,500 compact discs. A 200-foot steel, titanium and plastic mast, with the radar antenna boom anchored to the shuttle's cargo bay, will be deployed to capture more complete global snapshots of the earth. The mast comprises a series of stiff, stacked cubes measuring 1.05 m (3.5 ft) in diameter and can be folded up inside a 2.7 m can. The radar equipment, including the billboard antenna, weighs 13 tons and will scan the earth in 225 km swaths with radar return signals received by the cargo bay and boom antennas. By combining images acquired 59 m apart in space, scientists expect to capture three-dimensional snapshots of the earth's surface, providing nine times more topographic data than currently available to scientists. Topographic measurements are expected to be taken every 29.4 m (98 ft) with elevation readings accurate to approximately 15.6 m (52 ft). A smaller, simpler version of the radar system was launched twice on the Endeavour in 1994.

## New Wireless Networking Technologies Demonstrated

Rockwell Science Center, Thousand Oaks, CA, has successfully demonstrated micromachined silicon relays and wireless networking technologies during the space flights of the two smallest satellites ever released into orbit. (The picosatellites weighed less than one-half pound each and measured 4.0" × 3.0" × 1.0".) The micro relays and networking technologies are expected to significantly reduce the size, power and cost of future satellites used for applications such as telecommunications and weather imaging. The picosatellites were launched into space from the Stanford University Orbiting Picosat Automated Launcher, a satellite platform that flew aboard an Air Force rocket launched from Vandenberg AFB on January 26. With funding from the Defense Advanced Research Projects Agency (DARPA), Aerospace Corp. acted as the system integrator for the picosatellite mission; DARPA also sponsored the creation of many of the underlying technologies.

As part of a series of unique experiments, the picosatellites communicated with each other via a low power RF link and a ground station to exchange information obtained from a series of simple onboard circuits. The circuits, which were developed with DARPA funding, tested the reliability of micro-electromechanical systems in space and probed the low earth orbit environment. The satellite networking technologies employed low cost digital cordless telephone technology modified for data communications and networking. Technologies derived from Rockwell's wireless integrated networked sensor (WINS) development programs also were utilized for the first time. WINS systems combine digital cordless telephone technology with data processing capabilities, multihopping networking protocols and actuation devices in order to achieve scalable networks for automation monitoring and control.

## US Navy Selects Motorola Digital Modular Radio

Motorola Inc. has been awarded a $48 M contract by the US Navy Space and Naval Warfare Command (SPAWAR) for the manufacture of an all-digital, software-programmable radio under the Digital Modular Radio (DMR) program. The Navy selected the Motorola DMR for shipboard and shore installations after the successful completion of competitive field trials at the Navy SPAWAR Systems Center in Charleston, SC. The Motorola units demonstrated the key features of reprogrammability, operation with existing radios and mechanical endurance for challenging environments aboard surface ships and sub-

# FEED LOOKING

## COMPONENTS
## SUPER COMPONENTS
## MULTI-FUNCTION MODULES

### DIRECTIONAL COUPLERS




- LOW LOSS
- HIGH DIRECTIVITY
- WIDE OR NARROW BAND
- WRAP AROUND GROUND

### DIVIDERS/COMBINERS




- IN PHASE DESIGNS
- 2 & 3 WAY
- LOW LOSS
- INTEGRATED RESISTORS

### INLINE MULTICOUPLERS




- LOW LOSS
- 3 TO 8 COUPLERS PER MODULE
- INTEGRATED COMPACT PACKAGE

# FORWARD TECHNOLOGY

## MULTI-MIX™
MICROTECHNOLOGY

### VECTOR MODULATORS




- WIDE DYNAMIC RANGE
- HIGH LINEARITY
- LOW NOISE FIGURE
- FLAT RESPONSE

### QUAD HYBRIDS




- LOW LOSS
- EXCELLENT PHASE & AMPLITUDE BALANCE
- WIDE OR NARROW BAND
- WRAP AROUND GROUND

GET THE COMPLETE STORY AT MERRIMACIND.COM

MERRIMAC

41 Fairfield Place
West Caldwell, NJ 07006
Tel: 973.575.1300
Fax: 973.575.0531
www.Merrimacind.com

QUALITY SYSTEM REGISTRATION FMRC

The MULTI-MIX™ MICROTECHNOLOGY GROUP

CIRCLE 69 ON READER SERVICE CARD





marines. Their fully software-reprogrammable capability enables radio operators to point and click via an interface that is similar to a commercial PC, allowing the setup and alteration of characteristics such as bandwidth, modulation, error control, security and waveforms.

The Motorola DMR will allow the Navy to train operators on one platform, replacing numerous existing systems that are designed specifically to communicate with other armed services, the US Coast Guard and NATO allies. Another key feature of the DMR is the embeddable Advanced INFOSEC Machine, which recently received Type 1 certification from the National Security Agency. An onboard Secure Operating System allows simultaneous operation on multiple channels using different algorithms, potentially replacing many standard encryption functions with a single device. The Motorola DMR also will offer the Navy the expanded capability of communicating with civilian public safety and law enforcement agencies by simply downloading and installing appropriate frequency and waveform software, and will be compliant with the DoD's Joint Tactical Radio System once the architecture is defined. The DMR is part of the Motorola Wireless Information Transfer System product line and employs commercial standard processors and software to ensure low cost of ownership and extended product life. The agreement is valued at approximately $368 M if the Navy exercises all of its options in the Indefinite Delivery Indefinite Quantity contract.

## Naval Solid-state Radar Development to be Examined

Lockheed Martin Corp. and Alenia Marconi Systems SpA of Italy have entered into a teaming agreement to study joint development of an active solid-state S/C-band phased-array radar for applications in the worldwide surface ship marketplace. The agreement is expected to initiate a four-month-long feasibility study in which the two companies will collaboratively identify top-level requirements and architectures for a single-faced active solid-state rotating phased-array radar and project a basic configuration for future development. In addition, the study will evaluate the use of S/C-band active solid-state phased-array radars for other applications. Pending the results of the study and subsequent extensions of the agreement to follow-on phases, the companies intend to explore potential domestic applications of the radar as well as its possible use by foreign navies. In addition, the feasibility of a four-fixed-face active solid-state S/C-band phased-array radar design to support the Anti-Air Warfare and theater ballistic missile defense missions will be examined. The joint study is considered the first step in the development and production of next-generation radars. ■



MULTI-MIX™
MICROTECHNOLOGY

# FEED FORWARD LOOKING TECHNOLOGY

# DIRECTIONAL COUPLERS

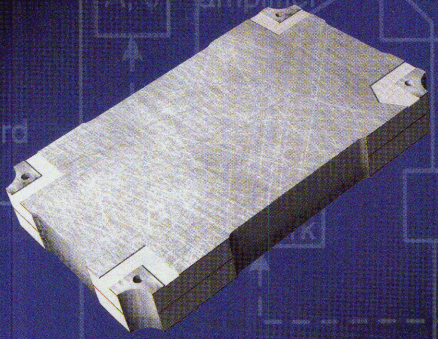

- LOW LOSS & VSWR
- HIGH DIRECTIVITY & ISOLATION
- WIDE OR NARROW BAND
- WRAP AROUND GROUND

The Multi-Mix™ CSD series provides cost effective directional couplers that are ideal for power amplifiers, signal distribution & processing and the full spectrum of wireless applications.

MERRIMAC

GET THE COMPLETE STORY AT MERRIMACIND.COM

41 Fairfield Place, West Caldwell, NJ 07006
Tel: 973.575.1300 / Fax: 973.575.0531

The MULTI-MIX™ MICROTECHNOLOGY GROUP

# TECHNOLOGY

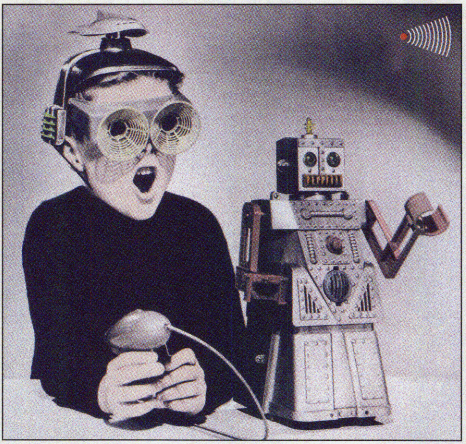

## CAPABILITIES

Get a grip on **technology**, and you're in **complete control**.

That's why we use **six advanced process technologies** to create RFMD's **communications components**. Si BJT, Si Bi-CMOS, GaAs HBT, SiGe HBT, GaAs MESFET, Si CMOS – we have what it takes to get your project rolling.

We invented **Optimum Technology Matching®** to pair application needs with process performance. That's why our chips feature the best possible combination of **power**, **efficiency** and **integrated function**.

Don't toy with **technology** – unless you're playing with **the very best**.

**TECHNOLOGY** – it sets us apart.

RF MICRO·DEVICES

Proprietary, State-Of-The-Art
RF Integrated Circuits℠

7628 Thorndike Road
Greensboro, NC 27409-9421

**Phone 336.664.1233**
Fax 336.931.7454

Mention technology when contacting us.



**www.rfmd.com**

TM & © 2000, RF Micro Devices, Inc.

# SURFACE MOUNT
# RF TRANSFORMERS

## Over 100 off-the-shelf models...




**4kHz to 2200MHz** from **$1.95** ea. (qty.1-9)

What makes Mini-Circuits your single source for surface mount RF transformers? Variety, availability, performance, and price! From wide band transformers with low droop and fast risetime capabilities for pulse applications, to a particular impedance ratio from 1:1 through 1:36 specified for a wide range of impedance coverage, we will work with you on your design challenges. Tangible benefits such as very high dielectric breakdown voltage, excellent amplitude and phase unbalance for balanced to unbalanced applications, and easy to use surface mount package styles make Mini-Circuits surface mount transformers a great value. Our new ADT transformers are changing the face of RF transformer design with patent pending it™ Innovative Technology delivering small size, low cost, and better performance. This same leading edge transformer expertise can also develop your custom designs at catalog prices. So, simplify your transformer search...Big Time! Capitalize on the quality, design know-how, and off-the-shelf variety from Mini-Circuits. Call today!

***Mini-Circuits...we're redefining what VALUE is all about!***

**Mini-Circuits®**

US 92 INTL 93
CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718)332-4661 *INTERNET* http://www.minicircuits.com
For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE • EEM • MICROWAVE PRODUCT DATA DIRECTORY • WWW.RFGLOBALNET.COM



# INTERNATIONAL REPORT

**Martin Streetly, International Correspondent**

## Earth Observation Efforts Advance

In unrelated moves, Franco-British contractor Matra Marconi Space (MMS) has acquired National Remote Sensing Centre Ltd. (NRSC) and US contractor Ball Aerospace and Technologies is expected to propose a free-flying, space-based synthetic aperture radar (SAR) to the US National Aeronautics and Space Administration (NASA). The NRSC business, with annual turnover of £6.5 M, is based in Farnborough, Hampshire and Barwell, Leicestershire. Considered one the world's largest commercial suppliers of aerial and satellite earth observation data and products, MMS's acquisition of NRSC is expected to complement its core business, improving the overall scope of the company's space services. (In related news, MMS is in the process of joining with DaimlerChrysler Aerospace to create the ASTRIUM organisation.)

The Ball Aerospace campaign kicks off in the wake of February's successful Shuttle Radar Topography Mission (SRTM) and will build upon the company's experience in producing SRTM antennas. Dubbed the LightSAR concept, the new proposal is a revision of a previous space-based radar mapping concept that was denied NASA funding in 1999 in favour of the Franco-American Pathfinder Instruments for Cloud and Aerosol Spaceborne Observations effort. The most recent LightSAR vehicle is expected to fly in a low earth orbit to collect earth science data in the areas of geology, geophysics and agricultural survey. When compared with the SRTM system, the LightSAR concept features a primary antenna that is larger than the outboard unit and electronics with lower volume and power requirements. Prior to SRTM, Ball Aerospace was responsible for the antennas used in the Spaceborne Imaging Radar-C system that was launched in 1994. For the SRTM radar, Ball Aerospace developed an auxiliary reception array that was mounted on a telescopic 60 m mast and used as part of the system's ability to generate necessary data for three-dimensional imagery.

## Australia Acquires Danish and Israeli EW Systems

The Royal Australian Air Force (RAAF) has awarded contracts valued at approximately $34 M to Danish contractor TERMA Elektronik and Israeli company Elta Electronics Industries for the installation of electronic warfare (EW) equipment aboard its F-111C strike aircraft. The TERMA contract, which is valued at $4.2 M, will cover the supply of the company's AN/ALQ-213(V) EW Management System (EWMS). Forming part of an interim defensive aids upgrade, the F-111C EWMS application will combine the aircraft's radar warning receiver, countermeasures dispensing system and newly procured Elta EL/L-8222 jamming pod into a single control architecture. The acquisition of the L-8222 pod composes the second segment of the F-111C effort and will be acquired in a $30 M programme that involves Australian company Vision Abell acting as Elta's in-country subcontractor. In addition to the acquisition of the radar jammers, the package includes logistical support, test equipment and software manipulation tools. On a global scale, Australia is the eighth customer to purchase the EWMS since its introduction into service in 1992.

The development of an interim EW fit for the RAAF's F-111C strike aircraft resulted partly from the suspension of the service's Echidna programme, which initially was supposed to develop a modular, integrated EW capability that could be applied across a range of Australian frontline aircraft. A major factor in the failure of the first Echidna iteration was the US State Department's restriction on access to US-sourced EW data, which, in turn, caused Australia to effectively preclude US industry from the bidding process. A resolution to the access problem emerged at an Australian-US Ministerial Acquisition Council meeting in January. Using EW interoperability as the lever, both countries are expected to establish a memorandum of understanding that covers the exchange of EW threat data and the development of an EW co-operation mechanism. Accordingly, US participation is expected when the Australian Department of Defence releases a restructuring plan of the Echidna effort.

## Siemens Showcases New Technologies for the Future

German contractor Siemens showcased the SIMpad wireless Web pad, the Internet-controlled C-LAB Pathfinder robot demonstrator, the Voice Butler voice recognition remote control capability, the Bluetooth multi-device automated voice and data exchange interface, and a prototype wireless local area network (WLAN) at the CeBIT 2000 exhibition held in February in Hanover, Germany. The SIMpad wireless Web pad allows users to access the Internet at any time from any location. The prototype weighs slightly more than two pounds and functions as a communications terminal with a graphical interface. The unit can be operated at ranges of up to 150 m from a base station that is connected to a telephone network or a local area network. The SIMpad demonstrator communicates via GMS with the possibility of using General Packet Radio Service or Universal Mobile Telecommunication System links in the future. Developed by Siemens Switzerland, the unit operates from a Windows CE, allowing existing communications capability to be supplemented by third-party software. The C-LAB Pathfinder demonstrator is a small robotic device capable of controlling equipment via commands input into an Internet Web page. Operator feedback takes the form of a

# ATC 100 SERIES

## HIGH Q RF CHIP CAPACITORS



## THE ENGINEERS' CHOICE FOR OVER 30 YEARS

- RUGGED PORCELAIN DESIGN
- ULTRA-HIGH Q (Q = 10,000) SUPPORTING CRITICAL RF APPLICATIONS
  - POWER AMPLIFIERS
  - FILTERS
  - OSCILLATORS

FOR ATC'S EUROPEAN SALES OFFICES, SEE OUR WEBSITE

FROM HANDLING EXTREME RF POWER LEVELS TO SUPER-SENSITIVE SMALL-SIGNAL APPLICATIONS...FROM HIGH POWER BASE-STATION AMPLIFIERS TO HIGH Q FILTER AND OSCILLATORS – ATC'S 100 SERIES CAPACITORS HAVE SUPPORTED THE RF AND MICROWAVE INDUSTRY FOR OVER 30 YEARS.

ATC'S SELF-ENCAPSULATED PORCELAIN CONSTRUCTION HAS EVOLVED AND IMPROVED TO OFFER AN UNPARALLELED LEVEL OF MATURITY, MAKING THEM THE MOST REQUESTED CAPACITORS THROUGHOUT THE RF/MICROWAVE INDUSTRY.

American Technical Ceramics

### SPECIFICATIONS

| SIZE | DIMENSIONS | ESR | MAX. CURRENT | WVDC |
|---|---|---|---|---|
| A CASE | .055 x .055 | 56MΩ(1) | 1.0 A | 150V |
| B CASE | .110 x .110 | 39MΩ(1) | 3.33 A | 500V |
| C CASE | .250 x .250 | 10MΩ(2) | 19.58 A | 1000V |
| E CASE | .380 x .380 | 18MΩ(2) | 16.71 A | 1000V |

(1) 10 pF, 1 GHz ESR

(2) 1000 pF, 30 MHz ESR

# CIRCUIT DESIGNER'S NOTEBOOK

## *Piezoelectric Effect in Ceramic Capacitors*

The Greek root of the word piezo means "to press". In 1880, Jacques and Pierre Curie discovered that pressure applied to a quartz crystal creates an electrical potential on the crystal. Likewise, they also discovered that an electrical potential impressed on the crystal creates a deformation of the crystal. They referred to this phenomenon as the piezoelectric effect.

The piezoelectric effect can be readily defined as the generation of an electrical potential as a result of applying pressure or by mechanically deforming a piezo crystal lattice structure. This deformation causes the molecules in the material to become electrical generating dipoles resulting in a potential difference across the crystal.

The piezoelectric effect occurs in crystals that have no center of symmetry. This lends itself to a net polarization of the crystal. The most widely known piezoelectric material is quartz. Others include various polycrystalline ceramics that are frequently used in capacitor dielectric formulations. One such group of materials is known as perovskites. Perovskites are one of the most abundant minerals on earth and are used in a large family of crystalline ceramic formulations such as barium titanate, calcium titanite and lead zirconate titanate. These crystals have some inherent piezoelectric properties that require careful processing to minimize the piezoelectric effect when used in capacitor fabrication.




*Example of a Perovskite Ceramic - Barium Titanate (BaTiO3)*

### Piezoelectric Ceramics:

Because of the anisotropic nature of many ceramics materials, piezoelectric effects are dependent on direction of mechanical excitation. This concept is illustrated by the ceramic element shown in the following figure. The axes labeled *x*, *y*, and *z* follow the classical right hand orthogonal axial set. The orthogonal coordinate system shown here is commonly used to describe piezoelectric properties. The reference direction is conventionally chosen as the *z* axis. A mechanical or electrical response in any of the three directions will produce a response in its corresponding orthogonal axis. For example, an electric field in the *z* direction causes a mechanical deformation in the *x* direction, and conversely a mechanical deformation in the *x* direction will result in an electric field in the *z* direction. The piezoelectric effect along any axis is dependent on a mechanical excitation of an orthogonal axis.




### Circuit Application Considerations:

Stability: Issues regarding the generation of microphonics due to the piezoelectric effect can lead to a myriad of performance issues in many circuit applications.

Some examples are:

- Production of extraneous (unwanted) signal voltages due to structure borne vibration that can de-tune high Q circuits.
- Oscillator instability, especially where tuning is accomplished with passive components.
- Ringing in pulsed circuit applications.
- Generation of erroneous data in digital circuits.

### Mechanical Stress:

Mechanical stress on the capacitor due to vibration can disrupt the termination-ceramic interface. The shear forces that exist in piezoelectric ceramics can lead to unreliable ceramic-termination interface. This condition may gradually reduce performance by progressively degrading the loss tangent (DF).

When RF voltage is applied to the capacitor, the microstructure will grow and shrink at the same frequency as that of the applied voltage. This can lead to shear forces that can cause deformations leading to reduced reliability or catastrophic failure.

### Phase Sensitive Applications:

Capacitors exhibiting piezoelectric effects should not be used in filter network designs. Phase shifters, filters, oscillators, or any design where phase stability is essential, should avoid the application of piezoelectric dielectric materials, because phase variations in accordance with the mechanical excitation may occur.

### Coupling Applications:

Interstage coupling applications are frequently sensitive to capacitors exhibiting piezoelectric effect. The designer should avoid using these capacitors in sensitive applications as they can pass along non-linear distortions to succeeding stages.

**Richard Fiore**
*Sr. RF Applications Engineer*
*American Technical Ceramics Corp.*

to learn more
Click here
www.atceramics.com

PHONE: 516-622-4700 • E-MAIL: SALES@ATCERAMICS.COM • WWW.ATCERAMICS.COM

ISO 9002 REGISTERED COMPANY

THE ENGINEERS' CHOICE™

CIRCLE 13 ON READER SERVICE CARD

video stream generated by an onboard camera. Potential applications include plant automation, home automation and telemedicine. The designation C-LAB is taken from the system's developer, Siemen's Innovation Centre at Paderborn University, and the prototype's interface with the Internet makes use of Apple's Quicktime 4 software. The Voice Butler prototype is a general-purpose, remote control capability that is based on voice recognition and designed to replace current household infrared remote control devices while providing voice activation for domestic lighting, heating and ventilation systems. The Voice Butler is capable of controlling up to 13 discrete devices, handles instructions from up to four different speakers and accepts commands in English, French, German, Italian, Portuguese and Spanish. The WLAN is designed to provide mobile access to personalised network services and information from any device anywhere in the world. Using WLAN technology, users can access personal e-mail accounts, centrally organised schedulers and/or addresses from any mobile terminal compatible with GSM, Bluetooth or similar technology. The Bluetooth interface is a joint effort by Siemens and Fujitsu Siemens Computers, which makes use of a plug-in, cordless communications module that works with a WLAN server. Bluetooth has the capability to seamlessly connect cellular phones, notebooks and desktop personal computers and is expected to be commercially available by this summer.

## Philips Introduces FlipChip Variant of DC-to-DC Converter IC

Netherlands contractor Philips Semiconductors has introduced a smaller-sized FlipChip variant of its model TEA1207 DC-to-DC converter IC. The 3.9 mm model TEA1207UK device's chip-scale package can be easily mounted on a PCB using existing surface-mount equipment. If secured to the PCB with solder bumps or balls, the TEA1207UK will eliminate the need for wire bonding and intermediate-level packaging. Other advantages of the FlipChip variant include improved thermal and electrical performance, the use of standard body sizes and pin counts, and the potential lower cost of ownership. The TEA1207UK is capable of downconverting to 1.25 V while maintaining a 90 percent conversion efficiency for output currents between a few milliamps and 0.5 A. In upconvert mode, the IC can generate an output voltage between 2.8 and 5.5 V from an input voltage greater than 1.8 V with a switching frequency from 220 to 330 kHz (275 kHz (typ)). Designed specifically for applications where low voltage, low power CMOS logic is used to minimise battery drain, the device also features a digital control circuit that uses output voltage level as its control input. ■





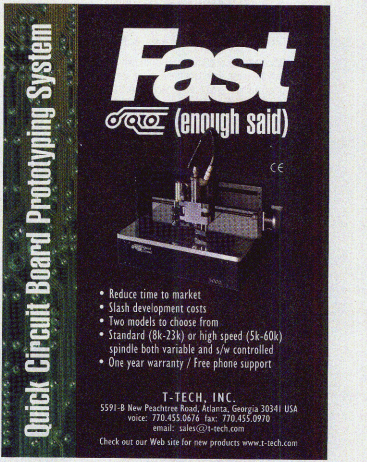


DO1607 Power Inductors


DO1608 Power Inductors


DO3308 Power Inductors


DO3316 Power Inductors


DO3316HC Power Inductors


DO3340 Power Inductors


DO5022 Power Inductors


DO5022HC Power Inductors


DS1608 Power Inductors


DS3316 Power Inductors


DS5022 Power Inductors


DT1608 Power Inductors


DT3316 Power Inductors


EE Power Transformers


Toroid Power Inductors


Custom Power Transformers


Custom Power Transformers


RS232/485 Isolation Transformers


M2022 EMI/RFI Filters


TTDLF EMI/RFI Filters


CCDLF EMI/RFI Filters


LC Filters

# The world's most powerful magnetic field


1812 Wideband Transformers


TTWB Wideband Transformers


WBSM Wideband Transformers


TTTRF Tip/Ring Filters


0603CS Chip Inductors


0805CS Chip Inductors


0805HS Chip Inductors


0805HT Chip Inductors


1008CS Chip Inductors


1008HS Chip Inductors


1008HT Chip Inductors


1008CT Chip Inductors


1008LS Chip Inductors


1206CS Chip Inductors


1812CS Chip Inductors


1812LS Chip Inductors


Micro Spring Inductors


Micro Spring Inductors


Mini Spring Inductors


Mini Spring Inductors


Midi Spring Inductors


Maxi Spring Inductors

From 0603 RF chip inductors to 16 Amp power inductors, only Coilcraft offers so many types of surface mount magnetics.

And only Coilcraft sells factory-direct and stocks most parts for immediate shipment.

For free evaluation samples or to order our handy Designer's Kits, visit our web site at **www.coilcraft.com.**

See why Coilcraft is your most attractive source for surface mount magnetics!

**ORDER DIRECT**
**800-322-2645**
OVERNIGHT DELIVERY! CALL BY 5 CST.

Coilcraft

Cary IL 60013 800/322-2645 Fax 847/639-1469
WWW http://www.coilcraft.com DATAFAX 800/551-0574

# Introducing an infinitely smarter and safer way to cross the road.

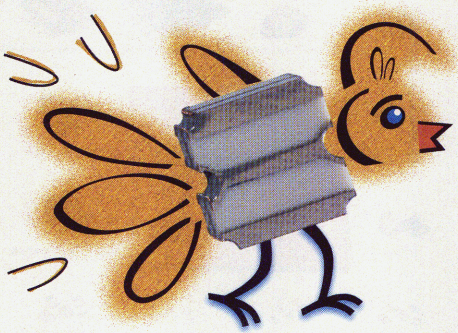

**Introducing the Xinger® Crossover from Anaren — a simple solution for the age-old problem of "getting to the other side."**

Xinger®

You can now cross any RF and DC line combination and avoid dangerous intersections within low- and high-frequency applications such as NMT, GSM, UMTS, MMDS and HiperLan.

The Xinger Crossover's multilayer-stripline packaging provides optimal line-to-line isolation to ease signal transmission and is a low-cost alternative to bulky, multilayer boards. RF-DC and RF-RF components are available — each with a tiny footprint of 0.2" x 0.2", a frequency range of 0 to 6GHz, and an insertion loss of less than 0.1dB and a return loss of less than 20dB at 6GHz. The RF-RF version also maintains an isolation higher than 25dB.

The Xinger Crossover is designed for surface mounting via tape or reel for quick circuit board assembly.

So, whether you want DC current capability or RF performance, the Xinger Crossover is the safest — and soundest — way to get to the other side.

Call today to find out more about the Crossover and the entire line of Xinger* products, including the balun and the mini-Xinger — exclusively from Anaren.

** Patent pending on the Crossover component and patent awarded on the Xinger packaging technology.*

**Questions? Contact Anaren at crossover@anaren.com**

**800-544-2414 > www.anaren.com**
**In Europe, call 44-2392-232392**
**Visa/MasterCard accepted (except in Europe)**

ISO 9001 certified

**Anaren**

**What'll we think of next?™**

**CIRCLE 16 ON READER SERVICE CARD**





## Global Fiber-optic Coupler Market to Reach $1.75 B by 2008

According to a recent report from ElectroniCast, the global consumption of fiber-optic couplers is projected to increase to $1.75 B by 2008 as a result of rising quantity growth (partially offset by a continuing decline of average prices). The report also predicts that global coupler consumption will be driven by the increasing demand for high capacity transport systems used in a variety of applications, including long-haul submarine networks, local loop networks, cable TV networks, test instruments and sensors. In 1999, North America led global coupler consumption with $149.7 M, followed by Europe with $108.9 M. (Germany, the UK, France and Italy represented the majority of fiber-optic deployment in Europe.) By 2008, global fiber-optic coupler consumption is expected to reach to $664.3 M in North America and $491.9 M in Europe.

Telecommunications fiber-optic coupler applications represented 59.3 percent of the global market consumption in 1999 with $233.5 M. The report predicts, however, that this consumption share is expected to decrease to 56 percent but increase in value to $980.1 M by 2008. Other applications for fiber-optic coupler consumption include cable TV, which represented 14.3 percent of the market share in 1999 with $56.3 M and is expected to increase to $143 M by 2008. The military/aerospace segment, which accounted for 11.6 percent with $45.6 M, is expected to increase to $273.5 M while specialty applications (including test instruments and automotive) are expected to increase to $249.8 M by 2008. Premise data networks, which consumed $19.1 M in 1999, are expected to increase to $103.8 M by 2008. For additional information, contact Theresa Hosking, ElectroniCast (650) 343-1398, fax (650) 343-1698.

## Intelligent Mobile Units to be Installed in Service Vehicle Fleets

HighwayMaster Communications Inc., a provider of wireless voice and data communications services to the commercial trucking and service vehicle industries, has been selected by SBC Communications Inc. to supply Ameritech and other SBC member companies with more than 28,000 HighwayMaster series 5005S intelligent mobile units as well as enhanced proprietary software and services. The systems will provide service vehicle fleets with event-based location tracking, mobile voice communications and a location-based panic alarm device using both terrestrial-based wireless communications capabilities and the Global Positioning System (GPS) satellite network, thereby increasing effective utilization of service fleets and providing a safer work environment for service technicians. Installations are expected to occur throughout this year. The enhanced cellular network utilizes more than 70 cellular providers in the US and Canada, offering coverage in essentially all of the available US markets and neighboring Canadian markets. The newest installations are expected to create one of the largest GPS-based fleet service management systems in the US. To date, HighwayMaster has installed more than 43,000 mobile units at various SBC companies.

## Ford to Bring Internet Features to the Automotive Industry

Ford Motor Co. has announced plans to equip next year's model vehicles with voice-activated telematics systems that offer advanced security features and information access. The systems will be standard on select Lincoln luxury vehicles and optional on Ford Focus vehicles in Europe. The telematics system will include a voice-activated access option to personalized Internet information including news, stock quotes and weather. Additional features that will enhance passenger safety and security include automatic collision notification, which sends a message identifying the vehicle and its location to an operator whenever the air bags are deployed; an emergency assistance button, which connects a vehicle to an operator when police, fire or medical assistance is needed; and a roadside assistance button, which provides information about nearby roadside assistance.

An optional satellite radio service that offers 100 channels of radio programming throughout the US will be available beginning in 2001. In the near future, optional equipment that enables passengers to surf the Web and download material and remotely monitor the vehicle's operating systems are expected to be made available. Passengers also can expect to control the onboard systems with their own computing equipment. The application of Bluetooth technology is predicted to permit wireless control of car systems from digital devices and, ultimately, provide communication of real-time traffic information between vehicles. The telematics systems are expected to be installed on most Ford vehicles over the next several years.

## Cellular Base Station Deployment in Europe Expected to Triple by 2005

The Strategis Group Inc.'s recent analysis, "Strategis dataBank™: European Cellular Network Infrastructure," projects that cellular base station deployment across Europe will nearly triple over the next five years, increasing from approximately 210,000 base stations in mid-1999 to more than 500,000 base stations in 2005. As subscriber growth and wireless phone usage continue to





grow significantly in Europe, wireless operators are scrambling to improve both population and territorial coverage to maintain and improve their competitive position in the European market. In mid-1999, Germany's T Mobil was the leader among European cellular operators with 18,500 base stations deployed. (E-plus, Mannesman, France Telecom and SFR (France) rounded out the list of top-five operators.) While Germany is predicted to maintain a high base station density (in terms of square kilometers), the Netherlands and Belgium are expected to lead the European market with a projected 450 base stations per 1000 square kilometers by 2005. The report projects that five markets will account for approximately 60 percent of Europe's base station deployment by 2005, including Germany (24 percent), Italy (10 percent), the UK and France (eight percent) and Spain (seven percent).

The report, which is a compilation of interviews with 123 cellular operators who represent 160 networks across 39 countries in Eastern and Western Europe, also provides data for base stations by country and technology from 1997 to 2005, population and territorial coverage, network launch dates (including launch dates for dual-band GSM 900/1800 networks), infrastructure vendors, infrastructure vendor market shares and average base station density and population penetration. For additional information, contact Elizabeth Harr Bricksin, The Strategis Group (202) 530-7505 or e-mail: ehbricksin@StrategisGroup.com.

## High Speed Internet Service to Reach 16.6 Million Subscribers by 2004

The Yankee Group has released a report, which forecasts that the US market for residential high speed Internet services will reach 3.3 million subscribers by the end of this year and 16.6 million subscribers by 2004. At the end of 1999, the installed base of domestic high speed Internet subscribers totaled 1.4 million with nearly 80 percent of these subscribers using cable modems for access. While the cable industry is expected to continue to lead the market over the next five years, its total share of high speed Internet subscribers is expected to shrink to 42 percent by the end of 2004 as local telephone companies make digital subscriber line (DSL) service more widely available. In addition, approximately 41 percent of US households are expected to have access to cable modem service by the end of this year, while only 24 percent will have DSL access. Nearly two-thirds of PC-equipped homes expressed interest in high speed Internet service and 40 percent of those indicated a willingness to pay up to $40 a month for service. For additional information, contact Kim Vranas, The Yankee Group (617)-880-0214 or e-mail: kvranas@yankeegroup.com. ■


Combline Filters

Designed to Your Specifications

MICJOUR0002_3



Foreign Distributors Sought

•For Frequencies of 500 MHz to 26.5 GHz
•2 to 17 Resonant Sections
•Bandwidth of 3 to 50%

800-448-1666 • 315-438-4700
Fax: 315-463-1467 • Toll Free Fax: 888-411-8860
E-Mail: mfcsales@microwavefilter.com
Visit our Web Site: http://www.microwavefilter.com

MFC MICROWAVE FILTER COMPANY, INC.

Quasar

Leaders in Microwave technology

For Microwave point to point radio, LMDS, UMTS & Satellite Communications

Quasar has developed a family of microwave waveguide components for communications applications where precision, quality and reliability are paramount.

- Directional Couplers, Splitters and Combiners
- Filters and Diplexers
- Power Combiners

Quasar can combine these products into single integrated assemblies which are ideally suited to "Hot stand by" or 1+1 applications this eliminates the need for flexible waveguide. Designs and prototypes for specific customer requirements can be made within weeks from Quasar's high quality factory in the UK. Whether you are designing the next point to point radio or a satellite transmitter/receiver Quasar can help you. *Call us today or take a look at our website.*



Quasar

Quasar Microwave Technology Limited
Battle Road, Heathfield, Newton Abbot,
Devon TQ12 6XU, England
Tel: +44 (0)1626 834222
Fax: +44 (0)1626 832994
Email: sales@qmtl.com

See our NEW WEBSITE www.qmtl.com

# Introducing High Power Linear Power Amplifier Modules

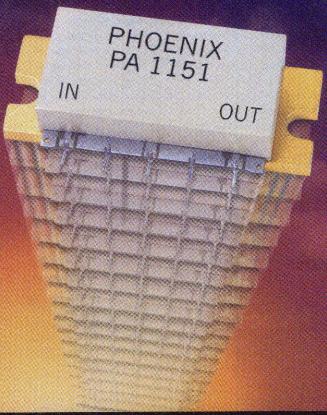


## 4 Watt PCS Linear Power Amplifiers

**Typical performance @ +25° C**

| Parameter | PA1162 | PA1163 | PA1151 | PA1157 | PA1159 |
|---|---|---|---|---|---|
| Frequency (MHz.) | 800-960 | 1810-1870 | 1930-1990 | 2000-2200 | 2300-2400 |
| Gain (dB.) | 35.0 | 27.0 | 26.5 | 24.5 | 23.5 |
| Gain Flatness (dB.) | ±0.4 | ±0.5 | ±0.5 | ±0.5 | ±0.5 |
| Pout @ 1 dB. comp. (dBm.) | +36.2 | +36.5 | +36.8 | +36.0 | +36.2 |
| IP3 (dBm.) | +52.0 | +52.0 | +54.0 | +50.0 | +52.0 |
| Noise Figure (dB.) | 2.3 | 2.4 | 2.4 | 3.0 | 3.2 |
| Vcc/Ic (v/mA.) | +10/1350 | +10/1350 | +10/1350 | +10/1350 | +10/1350 |
| VSWR | 2.1:1 | 2.0:1 | 2.0:1 | 2.0:1 | 2.0:1 |

** CDMA and TDMA test data available upon request*

In today's competitive wireless environment "Time to Market" is a very crucial factor for the success of a new product.

For Cellular, PCS, and WLL cell sites, Phoenix Microwave Corporation *offers the largest selection of linear amplifier modules* to accelerate your multi-carrier power amplifier designs.

With our *unmatched performance and delivery* you not only reduce your design time but also enhance your system's capability.

In addition, our application's staff is ready to develop new cost effective linear amplifier modules customized to your requirements.

So from your initial design concept to high volume production, make Phoenix Microwave your linear amplifier module partner.

**Call today: 215-723-6011 or**
**e-mail us at info@phnixmw.com**

PHOENIX MICROWAVE Corp.





## INDUSTRY NEWS

■ **Alcatel** has entered into a definitive agreement to acquire wide area networking solution designer and manufacturer **Newbridge Networks Corp.** The acquisition is subject to Newbridge shareholders' approval of a merger agreement that will allow for the ultimate conversion of each Newbridge share into 0.81 Alcatel ADS. The transaction is valued at $7.1 B. In related news, Alcatel has entered into an agreement with **STMicroelectronics Inc.** whereby Alcatel will adopt the STMicroelectronics ST100 digital signal processor core that is designed specifically for communications applications where a powerful, high end embedded core is required. Under the terms of the agreement, Alcatel intends to embed this core in a variety of system-on-chip solutions for digital subscriber line, voice-over-Internet protocol and other leading-edge technologies.

■ Specialty optical fiber and fiber-optic product designer and manufacturer **SpecTran Corp.** has been acquired by Lucent Technologies. Lucent's **Specialty Fiber Technologies** division will offer customers integrated solutions for industrial, telecommunications, medical, transportation, aerospace and geophysical applications.

■ **Telaxis Communications Corp.**, South Deerfield, MA, has completed the sale of its **Millitech Division** to **Millitech LLC**, an entity formed by private investors. In connection with the sale, Telaxis received $1.75 M in cash payment, a subordinated note and a minority equity interest in Millitech LLC as well as a seat on the Millitech management advisory board for at least three years. The purchase price is subject to post-closing adjustment.

■ **Varian Inc.**, Palo Alto, CA, has acquired the Poway, CA-based electronics manufacturing operation of **Inter-Tel Inc.** Under the terms of the acquisition, Varian is expected to receive inventory and fixed assets for a net book value of $6.6 M and the assumption of the lease for a 112,000-square-foot facility. In addition, Varian is assuming responsibility for the operation's computer telephony products as well as procurement, assembly, test and depot repair.

■ Electron tube manufacturer **Burle Industries** has created **Burle GmbH**, a new European subsidiary to market and support all of the company's power tube and electro-optic products, including high energy power tubes, silicon target imaging devices, scientific detectors and spectroscopy products.

■ **Wyle Electronics**, a member of the **VEBA Electronics Group**, has created **RF Vision**, a new subsidiary business unit that will provide technical distribution solutions to manufacturers in the wireless and electro-optics industries. The new company, which will be located at Wyle's Northern California facility in Silicon Valley, will specialize in advanced RF/microwave and fiber-optic technology.

■ Thermal management solution provider **Aavid Thermal Products Inc.**, a wholly owned subsidiary of **Aavid Thermal Technologies Inc.**, has changed its name to **Aavid Thermalloy LLC** to reflect its recent acquisition of Theramalloy Inc.

■ **Pulse**, a **Technitrol** company, San Diego, CA, has formed a group dedicated to developing and supporting a broad range of off-the-shelf electronic components for the cable market. The **Cable Products Group** will focus development efforts on products that support the accelerating deployment of hybrid fiber-coax networks as well as cable access equipment.

■ **Tektronix Inc.** has formed a new group within its **Measurement Business Division** to focus on meeting the ever-increasing customer desire to access information and conduct business online. The **Internet Business Group** is expected to develop a more interactive and collaborative Web environment with expanded information on products, applications, technologies and other services.

■ **Rockwell Collins**, Cedar Rapids, IA, has created an electronic business unit that will offer expanded e-business solutions to its customers. The company intends to consolidate its information technology, enterprise resource planning and e-commerce departments to form a strategic working group that brings together business unit, customer and supplier requirements.

■ **Taiyo Yuden Inc.** of Japan has announced plans to open **Taiyo Yuden (Guangdong) Company Ltd.**, a new 42,650-square-foot manufacturing plant located in the People's Republic of China, in an effort to upgrade existing manufacturing processes and dramatically increase production of high frequency, multilayer chip inductors and multilayer ceramic capacitors. The $8.4 M facility is expected to begin operations in July.

■ **EMP TrexCom** has moved to a new 85,000-square-foot facility located at 900 Enchanted Way, Simi Valley, CA 93065 (805) 581-7868, fax (805) 581-7821 or e-mail: info@emptrexcom.com. The new facility is equipped with state-of-the-art engineering, manufacturing and testing systems including near- and far-field test ranges for accommodating antennas up to 13 m in diameter.

■ **Emerson & Cuming Microwave Products** has opened a new 6000-square-foot, state-of-the-art processing center for carbon-loaded foam microwave absorber products in Randolph, MA. The new facility has the capacity to produce 10,000 to 20,000 square feet per week of both sprayed and dipped carbon foam products.

■ RFIC solution designer and manufacturer **ANADIGICS Inc.** has announced plans to expand its state-of-the-art six-inch InGaP HBT, pHEMT and MESFET manufacturing facility to include additional Class 10 cleanroom space and equipment installation. The $10 M expansion, which is scheduled for completion by the middle of this

[Continued on page 60]

# High Performance

## RF & Microwave Signal Processors

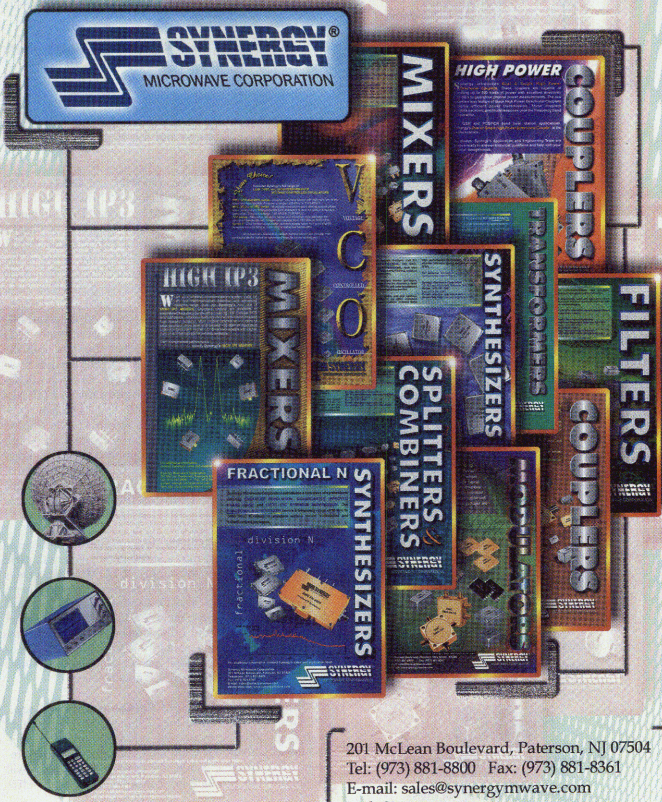


201 McLean Boulevard, Paterson, NJ 07504
Tel: (973) 881-8800 Fax: (973) 881-8361
E-mail: sales@synergymwave.com
Web Site: www.synergymwave.com

CIRCLE 157 ON READER SERVICE CARD




What do your specs demand? A standard connector? A cable assembly? How about a hard to find model? Or maybe something that doesn't even exist yet? We suggest you visit www.tru-con.com. There you'll find a complete line of connectors — even those models you just can't find anywhere else. And if a custom connector is what you're looking for, we encourage you try our innovative "Build Your Own Connector" page where you can order what you want right away.

So get connected to the ultimate connector resource.

**www.tru-con.com**

**TRU-CONNECTOR CORPORATION**
*It Pays to be Well Connected.*

245 Lynnfield Street, Peabody, MA 01960
1-800-COAX-TRU • 978-532-0775 • Fax: 978-531-6993




year, is expected to approximately double current production capacity. In related news, ANADIGICS has shipped high volumes of power amplifiers for use in Ericsson T-class, dual-band mobile phones. The amplifiers were designed specifically to meet Ericsson's requirements for a low cost device that combines the high performance and functionality of two power amplifiers in a single, small package.

■ **Brush Wellman Inc.'s Electronic Packaging Products Group**, Newburyport, MA, has formed a strategic partnership with **RJR Polymers**, Oakland, CA, to supply the wireless industry with a complete electronic packaging solution. The partnership is expected to reduce cycle times for the design of new packages and enable customers to have packages and lids that are optimized to work together.

■ **RF Micro Devices Inc. (RFMD)** and **QUALCOMM Inc.** have entered into an alliance to provide advanced power amplifiers for the CDMA market. The companies have agreed to cooperate on the development of CDMA power amplifiers for inclusion in existing and future QUALCOMM CDMA chipsets. Under the terms of the agreement, QUALCOMM will market and sell the jointly developed CDMA power amplifiers using RFMD's wafer foundry manufacturing process. In related news, QUALCOMM has entered into an agreement with **Ericsson Microelectronics** to jointly develop and market the world's first wireless technology solution that supports both the Bluetooth standard and the CDMA digital wireless standard. Under the terms of the agreement, Ericsson will develop a Bluetooth-compatible radio unit and QUALCOMM will develop the Bluetooth digital baseband processing to be integrated into its future Mobile Station Modem (MSM™) chipset and software solutions. Both companies will work together to optimize the RF and digital designs for operation within a CDMA handset environment to create the most complete, high performance solution available for CDMA-based wireless data applications.

■ RF power semiconductor designer and manufacturer **UltraRF** has entered into a strategic alliance with **GHz Technology Inc.** for the supply of LDMOS RF power transistor technology. Under the terms of the agreement, UltraRF will supply UltraGOLD silicon LDMOS wafers to GHz Technology for inclusion in devices that target avionics, broadcast and other nonwireless applications. The alliance is part of a strategy that will allow GHz Technology to reach an expanded market while building on its core design and manufacturing competencies.

■ **Chomerics**, a division of **Parker Hannifin Corp.**, Woburn, MA, and **Nypro Inc.**, Clinton, MA, have formed a strategic alliance to provide telecommunications customers with an efficient and integrated manufacturing resource for obtaining conductive gaskets. The alliance will streamline the production of insert-molded conductive

*[Continued on page 62]*

# HITTITE MIXERS!

69¢ ea @100,000 pcs




Actual Size!

PERFORMANCE

QUALITY

AVAILABILITY

SUPPORT

PRICE

- 1.7 TO 3 GHz RF & LO
- ULTRA SMALL MSOP8 SMT PACKAGE
- LO/RF ISOLATION: 35 dB
- NO EXTERNAL COMPONENTS
- IDEAL FOR MMDS & W-CDMA

HITTITE MICROWAVE OFFERS A FULL RANGE OF MMIC STANDARD & CUSTOM PRODUCTS COVERING RF TO 40 GHz FOR COMMERCIAL, MILITARY, AND SPACE APPLICATIONS. OUR CUSTOM ASIC & MIXED SIGNAL DESIGN/MANUFACTURING CAPABILITIES UTILIZE THE BEST, PRODUCTION READY MESFET, PHEMT, HBT, OR BiCMOS WAFER FOUNDRIES. WE CAN PROVIDE CREATIVE SOLUTIONS FOR YOUR UNIQUE MULTI-FUNCTION MMIC, MULTI-CHIP MODULE OR SUB-SYSTEM REQUIREMENTS.

## CHECK-OUT OUR LINE OF IN-STOCK, LOW COST PLASTIC IC MIXERS

| Part Number | Frequency RF & LO | Isolation LO/RF* | Input IP3* | Plastic SMT PKG | Price @10K pcs |
|---|---|---|---|---|---|
| HMC207S8 | 0.7 - 2.0 | 45 | +15 | SOIC8 | $ 3.78 |
| HMC208MS8 | 0.7 - 2.0 | 40 | +16 | MSOP8 | $ 2.74 |
| HMC216MS8 | 1.3 - 2.5 | 33 | +25 | MSOP8 | $ 1.93 |
| HMC213MS8 | 1.5 - 4.5 | 42 | +18 | MSOP8 | $ 2.95 |
| HMC272MS8 | 1.7 - 3.0 | 35 | +20 | MSOP8 | $ 0.98 |
| HMC175MS8 | 1.7 - 3.4 | 37 | +18 | MSOP8 | $ 2.85 |
| HMC218MS8 | 4.5 - 6.0 | 30 | +17 | MSOP8 | $ 2.19 |
| HMC219MS8 | 4.5 - 9.0 | 30 | +21 | MSOP8 | $ 5.13 |
| HMC220MS8 | 5.0 - 12.0 | 25 | +18 | MSOP8 | $ 6.27 |

** DATA IS MIDBAND TYPICAL*



Request Our 1999 Catalog/CD!

PRODUCT SPECIFICATIONS ARE GUARANTEED, -40 °C TO +85 °C...

Hittite MICROWAVE CORPORATION

NEW ADDRESS!

www.hittite.com

VISA MasterCard WE ACCEPT

PHONE: 978 250 3343 ◆ FAX: 978 250 3373
12 Elizabeth Drive, Chelmsford, MA 01824 USA

CIRCLE 54 ON READER SERVICE CARD

products against electromagnetic interference in cellular phones and other electronic devices. As a result, customers can expect simplified ordering, faster deliveries and better-quality parts. In related news, Chomerics' Hudson, NH facility has received QS-9000 certification. The Hudson, NH facility designs, develops and manufactures thermal interface materials, EMI shielding laminates and the SOFT-SHIELD™ 4000 and 5000 lines of EMI shielding gaskets.

■ **Agilent Technologies Inc.** has signed a licensing agreement with **SyntheSys Research Inc.** for its error-analysis technology, which enables engineers to locate the causes behind errors in digital components and system hardware. Under the terms of the licensing agreement, Agilent will develop and market bit error ratio products that incorporate Synthesys' BitAlyzer technology.

■ **Calibre Inc.**, San Jose, CA, has entered into an agreement with **Infineon Technologies Corp.** under which both companies will dual-source selected products in their IrDA-compatible data transceiver product lines. The companies initially are expecting to dual-source a fast infrared IrDA-compatible transceiver with an innovative power architecture that will prolong battery life in IR-enabled personal digital assistants, digital still cameras, portable printers and other battery-powered electronic applications.

■ **Mitel Semiconductor** (a division of **Mitel Corp.**), **Philsar Semiconductor** and **Matsushita Electronic Components Co. Ltd.** have entered into an agreement to co-develop a module for next-generation Bluetooth systems. The companies will combine a silicon chipset designed by Mitel and Philsar with Matsushita's Panasonic high density packaging and RF expertise to provide a high performance and power-efficient route to Bluetooth 1.0-compliant systems. The agreement is expected to accelerate the adoption of Bluetooth technology in personal wireless connectivity solutions.

■ **Microcosm Technologies Inc.**, Cary, NC, and **Cronos Integrated Microsystems Inc.**, Research Triangle Park, NC, have entered into an alliance to offer JumpStart™ a design kit that provides a low risk, inexpensive, efficient turnkey method for developing and prototyping microelectromechanical systems (MEMS) devices. The unique MEMS design solution will comprise Microcosm's Catapult™ MEMS design tool with integrated layout generators, an engineering design kit for the Cronos certified multi-user MEMS processes (MUMPᵀᴹ) and a reserved slot on a Cronos MUMPs fabrication run.

■ **KCA Electronics**, Anaheim, CA, has purchased a model 9098 universal double-density grid test system from **Everett Charles Technologies**, Pomona, CA. In related news, **Adaptive Circuits**, San Jose, CA, has purchased the A2/16 flying probe test system from Everett Charles Technologies. The A2/16 flying probe test system has the capability to load and test multiple boards at the same time.

*[Continued on page 64]*


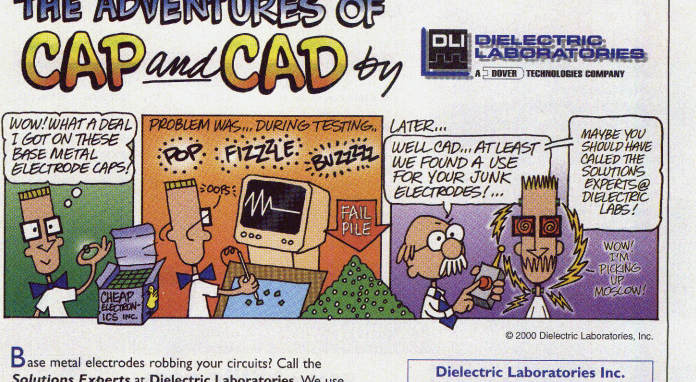


© 2000 Dielectric Laboratories, Inc.

Base metal electrodes robbing your circuits? Call the ***Solutions Experts*** at **Dielectric Laboratories.** We use high purity Palladium to form continuous electrodes to ensure the low ESR and high Q that you need.

**Dielectric Laboratories Inc.**
2777 Rte 20 E., Cazenovia, NY 13035
Phone: 315.655.8710 Fax: 315.655.8179
http://www.dilabs.com

# Contactless Phase Shifters:

## World-First 'Contactless' Brings Better Reliability under All Conditions

Designed by KMW for low insertion loss and good stability under hard environmental conditions, these Contactless Phase Shifter (:CPS) will provide the linear characteristic of phase and low IMD performance




KPH90OSCL000




KPH90OSCL001

## Standard Connectorized CPS

| Product Code No. | A type : KPH90OSCL000<br>B type : KPH90OSCL001 | | |
|---|---|---|---|
| Frequency Range | ~ 1GHz | 1 ~ 2GHz | 2 ~ 3GHz |
| Insertion Loss (Max.) | 0.15dB | 0.25dB | 0.35dB |
| VSWR (Max.) | 1.25:1 | 1.25:1 | 1.25:1 |
| Incremental Phase Shift | 90 degree min. @ 2GHz | | |
| Electrical Delay | 125 psec min. | | |
| Nominal Impedance | 50 ohm | | |
| I/O Port Connector | SMA(F) / SMA(F) | | |
| Average Power Handling | 20W @ 2GHz | | |
| Temperature Range | -30°C ~ +60°C | | |
| Dimension (inch) | A type : 1.496*1.102*0.457<br>B type : 1.225*1.102*0.457 | | |




KPH30OSCL000



KPH35OSCL000

## Miniature CPS

| Product Code No. | Drop-In type (KPH30OSCL000) | | | Connectorized type (KPH35OSCL000) | | |
|---|---|---|---|---|---|---|
| Frequency Range | ~ 1GHz | 1 ~ 2GHz | 2 ~ 2.5GHz | ~ 1GHz | 1 ~ 2GHz | 2 ~ 3GHz |
| Insertion Loss (Max.) | 0.15dB | 0.25dB | 0.35dB | 0.15dB | 0.25dB | 0.35dB |
| VSWR (Max.) | 1.3:1 | 1.3:1 | 1.3:1 | 1.25:1 | 1.25:1 | 1.25:1 |
| Incremental Phase Shift | 30 degree min. @ 2GHz | | | 35 degree min. @ 2GHz | | |
| Electrical Delay | 41.7 psec min. | | | 48.6 psec min. | | |
| Nominal Impedance | 50 ohm | | | 50 ohm | | |
| I/O Port Connector | Drop-In | | | SMA(F) / SMA(F) | | |
| Average Power Handling | 30W @ 2GHz | | | 30W @ 2GHz | | |
| Temperature Range | -30°C ~ +60°C | | | -30°C ~ +60°C | | |
| Dimension (inch) | 0.709*0.433*0.244 | | | 0.630*0.551*0.244 | | |



13131 East 166th Street, Cerritos, CA 90703-2202
1-800-8320-KMW • www.kmwinc.com
tel: 562-926-2033 • fax: 562-926-6133

KMW
RF & Microwave Products

## AROUND THE CIRCUIT

■ **EPCOS Inc.** (formerly **Siemens**), Iselin, NJ, has selected **Eastern Components Inc.**, West Conshohocken, PA, as an authorized distributor of the company's ferrites and accessories.

■ **Deltec Telesystems** has entered into a distribution agreement with **Huber + Suhner** of Switzerland. Under the terms of the agreement, Huber + Suhner will distribute Deltec's Teletilt™ and omni range of telecommunications antennas and antenna management systems throughout Europe.

■ Essential process management tool supplier **Electroglas Inc.** has licensed essential measurement technology from **Cascade Microtech Inc.** The licensing agreement is expected to reduce noise and measurement settling times in probers for wafer productions, thereby enabling faster and more accurate testing of advanced semiconductor devices, including high speed telecommunications and computing devices.

■ **Signal Technology Corp.'s Arizona Operation** has received ISO 9001 registration by AOQC Moody International Inc.

■ Digital video compression system provider **Enerdyne Technologies Inc.**, a subsidiary of **Advanced Remote Communication Solutions**, has received ISO 9002 certification.

■ **Times Microwave Systems** has announced that its LMR-900 LLPL series 50 Ω flexible, low loss plenum cables have qualified for in-building applications according to Underwriters Laboratories standards. The LMR-900 LLPL series complies with fire spread and smoke emission requirements, which allow cables to be installed within buildings directly in air-return plenum spaces such as dropped ceilings without the need to be installed in metal electrical conduit.

■ **ARINC Inc.** has received a Supplemental Type Certificate (STC) for its KC-10 aircraft, a DC-10-30 commercial airframe modified to a tanker and passenger-carrying aircraft for the US Air Force. The STC was issued by the Los Angeles Aircraft Certification Office for a series of safety-related modifications, which include an AlliedSignal Traffic Alert and Collision Avoidance System and an Enhanced Ground Proximity and Warning System.

■ RF component and subassembly manufacturer **RF Monolithics Inc. (RFM)**, Dallas, TX, has received the Delphi Automotive Systems Division Delphi-Delco Absolute Zero Defect Award. The award is presented to vendors who delivered units with zero failures or defects during the previous year. RFM is one of eight vendors out of 671 suppliers who received the award.

■ **Superconductor Technologies Inc. (STI)** has received a purchase order for 27 SuperFilter® systems from an unnamed cellular service provider, increasing its backlog to 56 systems. STI has shipped and delivered more than 200 SuperFilter systems during the past two years. The company is expected to announce a new line of SuperFilter products for third-generation high bandwidth networks for wireless communications and wireless Internet access.

■ **JDS Uniphase Corp.** has delivered its first shipment of 10 Gbps transmitter and receiver modules to meet the growing demand for higher functionality modules. The modules provide customers with a low cost solution for error-free data transmission for distances over 2 km.

■ **Crosspan**, a newly named telecommunications division of **Raytheon Commercial Electronics**, has announced that its active antennas, which are integrated into Ericsson's GSM Maxite™ 1900 system, were successfully deployed in Powertel's Jacksonville, FL PCS network. As the first North American PCS operator to use micro base stations with macro coverage capability, Powertel has 18 Maxite cell sites currently in operation.

■ The Center for the Study of Wireless Electromagnetic Compatibility (EMC) at the University of Oklahoma has announced that EMI gasketing solution provider **Instrument Specialties** has become a charter member of the center's Industry Advisory Board. The Oklahoma EMC Center is chartered to work with the wireless and medical device industries as well as government agencies to resolve inter-industry EMC issues.

## FINANCIAL NEWS

■ **Signal Technology Corp.** reports sales of $20.3 M for the fourth quarter, ended December 31, 1999, compared to $23.4 M for the same period in 1998. Net income was $1.6 M (20¢/diluted share), compared to $371 K (5¢/diluted share) for the same quarter in 1998.

■ **Ansoft Corp.** reports sales of $8.4 M for the third quarter, ended January 31, compared to $6.1 M for the same quarter last year. Net income was $458 K (4¢/diluted share), compared to a net loss of $356 K (3¢/diluted share) for the same period last year.

■ **Superconductor Technologies Inc.** reports sales of $2.2 M for the fourth quarter, ended December 31, 1999, compared to $1.8 M for the same period in 1998. Net loss was $3.0 M (42¢/share), compared to a net loss of $2.6 M (35¢/share) for the same quarter in 1998.

■ **Cascade Microtech Inc.** has completed a $10 M round of equity financing from the Teachers Insurance and Annuity Association of America. The funds will be used to accelerate the company's marketing and manufacturing capabilities in support of its new Pyramid Probe™ technology, which provides advanced testing capabilities for the development and production environments as well as today's sophisticated semiconductors.

■ **Iridium LLC** has secured interim financing in an effort to expedite the transition of its assets and personnel to a new operating company. The financing, which was approved by the US Bankruptcy Court for the Southern District of New York, is valued at $5 M with investments from Eagle Rivers

*[Continued on page 66]*

287 specs. 23 designers. 4 departments. 1 goal.

...is everybody on the same page?





**Ansoft HFSS**
3D electromagnetic structure simulation



**Harmonica**
linear & nonlinear circuit simulation



**Ensemble**
planar electromagnetic field simulator



**Symphony**
wireless & wired system simulation

## Interoperate

**Ansoft's Serenade Design Environment**

...delivering system, circuit, electromagnetic simulation, synthesis, and physical design in a single software suite. Streamline your product development process using integrated schematic capture, simulation, layout, IC package modeling, and links to third-party tools from companies such as Cadence®, Mentor Graphics and EEsof.

Handshaking between modules allows engineers to focus on critical components at any stage of development. Each simulator can be used as a powerful, stand-alone tool, or in concert with others for end-to-end high-frequency design. The Serenade Design Environment is built on Ansoft's core electromagnetics technology; and offers accuracy, an easy-to-use Windows® interface, advanced design utilities, and superior value.

For a free evaluation copy of any of the tools in Ansoft's Serenade Design Environment call 412-261-3200 or send e-mail to info@ansoft.com.

ANSOFT

high performance EDA

www.ansoft.com

CIRCLE 10 ON READER SERVICE CARD

## AROUND THE CIRCUIT

Investments LLC, Craig McCaw's investment company and Motorola. Iridium expected to file a motion to establish procedures for a sale under Section 363 of the Bankruptcy Code and to secure additional debtor-in-possession financing to cover the period extending until the middle of this month, when a sale was expected to be completed.

■ **RangeStar Wireless** has entered the final stages of its mezzanine round of financing. The private placement of funds will allow the company to fully capitalize on immediate marketing opportunities and generate additional embedded antenna technological developments. The investment is expected to accelerate the scheduled initial public offering date to early fall.

■ **REMEC Inc.** has filed a registration statement with the Securities and Exchange Commission for a public offering of 4.31 million shares of common stock. Of the offered shares, 3.5 million will be sold be the company; 250,000 will be held by one shareholder; and 562,000 shares will be held by certain selling shareholders, if the underwriters exercise their over-allotment option. A copy of the prospectus relating to the offering may be obtained from Needham & Company Inc., 445 Park Ave., New York, NY 10022.

## CONTRACTS

■ **REMEC Inc.** has entered into an agreement with a major mobile telecommunications network equipment manufacturer for the production of base station products, including integrated assemblies that provide signal conditioning and RF filtering functions. The agreement is valued at approximately $27 M with deliveries forecast over the next 12 months.

■ **Signal Technology Corp.**, Danvers, MA, has been awarded a contract by Raytheon Systems Co. for the supply of microwave oscillators in support of low rate initial production of the Brilliant Anti-armor (BAT) Submunition Program. The BAT Submunition Program employs passive acoustic and infrared sensors to locate, attack and destroy moving tanks and other armored vehicles deep in enemy territory. The contract is valued at $276 K. Future contracts for production hardware could exceed $4 M.

■ **Robinson Nugent Inc.** has received a contract to supply the backplane connector for the newly released MAX TNT multiprotocol wide area network access switch. The switch enables carriers, ISPs, corporations and major network providers to offer a variety of access services, including analog, integrated services digital network, leased T1/E1 and frame relay. Financial details of the contract were not released.

■ **EPI MBE Products Group**, St. Paul, MN, has received an order for a GEN2000 multiwafer production molecular beam epitaxy (MBE) system from RF Micro Devices. The GEN2000 will be utilized for mass production of epitaxial wafers used in the fabrication of high performance GaAs circuits. Financial terms of the contract were not disclosed.

## PERSONNEL

■ ANADIGICS Inc. has elected **Dennis F. Strigl** to the company's board of directors. Strigl is currently president and CEO of Bell Atlantic Mobile and Bell Atlantic Global Wireless.

■ American Microwave Technologies (AMT) has appointed **Pete Manno** president and CEO. Manno brings to the company more than 30 years of experience in the RF industry and, most recently, was an independent consultant. Also, **John Carollo** has been named VP and general manager of the company's Wireless Business Unit. Carollo was director of marketing at Hewlett-Packard Co.'s power amplifier division prior to joining AMT.



▲ *Ken Wadors*

■ **Ken Wadors** has been appointed president and CEO at RF Vision, a subsidiary of Wyle Electronics. Most recently, Wadors was senior VP and director of RF/small-signal business at Avnet Inc.

■ **Martin S. McDermut** has been named CFO and VP of finance and administration at Superconductor Technologies Inc. Most recently, McDermut was VP of finance and administration at International Remote Imaging Systems Inc.

■ **Edwin K. Walters** has been named CFO at Larus Corp. Walters brings to the company more than 19 years of management responsibility in financial services.



▲ *Guy Campbell*

■ Andrew Corp. has promoted **Guy Campbell** to president and director. Campbell joined the company one year ago as group president, Wireless and In-Building Products Group. Prior to that, he held numerous executive positions at Ericsson.

■ Rockwell Collins has appointed **John-Paul Besong** VP, Electronic Business. Besong has been with the company for 20 years and, most recently, was executive, enterprise resource planning.



▲ *John-Paul Besong*

■ STMicroelectronics Inc. has promoted **Enrico Villa** to corporate VP, director of European region and **Carmelo Papa** to corporate VP, region five. Most recently, Villa was corporate VP, region five and Papa was director of product marketing and customer service for transistors and standard ICs.

■ Cascade Microtech Inc. has appointed **Mark Olen** VP and general manager, Pyramid Probe Division and **Ken Smith** VP, corporate technology and Pyramid Probe operations. Most recently, Olen was VP of sales and marketing at Fluence Technology Inc. and Smith was director of operations at Cogent Research.

*[Continued on page 68]*

# SPACE QUALIFIED
# COMPONENTS

AMPLIFIERS • MIXERS • SYNTHESIZERS • SUPERCOMPONENTS

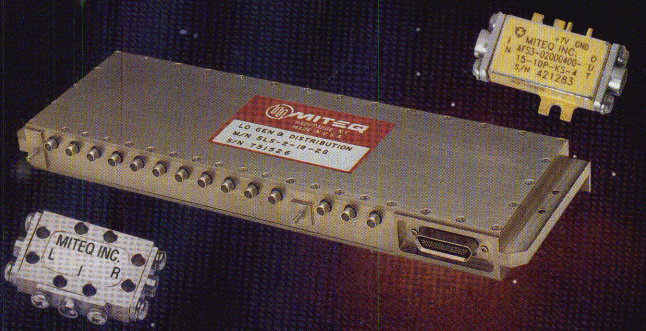


## OFFERING DESIGNS

- From 2 kHz to 60 GHz
- Optimized for Low Power Dissipation
- Meeting MIL-PRF-38534 or MIL-STD-883
- Capable of Withstanding the Rigorous Demands of Long Mission Life

## PRODUCT APPLICATIONS

- SATCOM LNAs
- Spaceborne Radar
- Transmitter Drivers
- Radiometric Sensors
- ELINT Receivers

NDH ISO 9001 REGISTERED COMPANY

MITEQ

100 Davids Drive, Hauppauge, NY 11788
TEL: (516) 436-7400 • FAX: (516) 436-7430
www.miteq.com

For further information, please contact David Krautheimer
at (516) 439-9413 or e-mail dkrautheimer@miteq.com

## AROUND THE CIRCUIT



▲ Adolph Cheung



▲ Garry Heverly

■ Trompeter Electronics Inc. has appointed **Adolf Cheung** VP, engineering and **Garry Heverly** regional sales manager for the eastern US. Most recently, Cheung was director of engineering at Dow-Key Microwave Corp. and Heverly was direct sales manager at Robinson Nugent Inc.

■ Tektronix Inc. has made several new personnel appointments, including **Bob Agnes** as VP and general manager, Video Business Unit; **Scott Bausback** as VP and general manager, Communications Business Unit; **Karsten Beutnagel** as VP, human resources; **David Churchill** as VP and general manager, Instrumentation Business Unit; **David Coreson** as VP, central operations; **Richard McBee** as VP, global marketing and strategic initiatives; and **Craig Overhage** as VP and general manager, Digital Systems Business Unit.

■ **Otis E. Hayes** has been named director of quality at CTS Corp. Most recently, Hayes was the director of quality assurance at Coto Technology.

■ Robinson Nugent Inc. has appointed **Dennis Frischkorn** district sales manager for the Pacific Northwest. Frischkorn brings to the company more than 20 years of sales experience and, most recently, was area sales manager for the San Francisco Bay area at FCI Berg Electronics.

## WEB SITES

■ **iMark.com Inc.**, a business-to-business Internet marketplace for used equipment, has added three new services to speed the buying and selling processes. ActiveSearch™ ActiveLead™ and ActiveTransfer™ allow customers to access more than 100,000 pieces of used equipment and complement the company's existing services, which include transportation, financing, spare parts, maintenance supplies, inventory, appraisal and data entry.

■ **Micro Networks Corp.**, Worcester, MA, has launched a new Web site that enables design engineers to search for products and information by product family, application, part number or keyword. The site, which is located at www.micronetworks.com, includes current product information, specifications, data sheets and the company's short-form catalog.

■ **SearchMil.com**, a **MaxBot.com** Internet search engine that covers US military Web sites, has reached the one millionth mark in the number of unique publicly accessible Web pages indexed. SearchMil.com specializes in military targeted searches, combining in-depth coverage of the .mil domain with powerful search engine technology that ranks results in order of popularity.


# How Well Protected Are You?

When T/R tubes degrade in your receiver protector applications, the consequences can be costly. Herley-MDI's Solid State Receiver Protectors are a direct replacement for traditional T/R tubes and deliver MTBF figures magnitudes higher. Our superior design is also capable of handling up to 10 KW of power. Plus, you can choose from any combination of passive limiting protection, sensitivity time control attenuation, gated transmitter pulse attenuation, built in test signals and detector monitoring. Additional features include exceptionally low insertion loss and typical VSWR of less than 1.5:1.

We're currently upgrading F-16 Fire Control, commercial weather, and shipboard radars. To give your current system maximum protection, call us or visit our web site today.

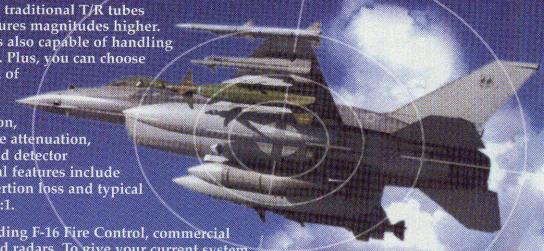



**HERLEY-MDI**

A HERLEY INDUSTRIES COMPANY

10 Sonar Drive Woburn, MA 01801

Tel: (781) 729-9450 • Fax: (781) 729-9547

**HERLEY Microwave Products Group**

www.herleympg.com

# Gore Fiber Optic Cables...
# When Things Get *Very* Close and *Very* Hot

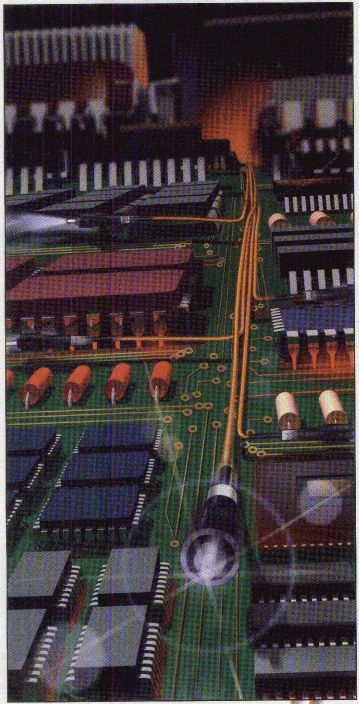

## FLEX-LITE™ Fiber Optic Cables - Continuous Performance Through 150°C Even in Tight Spaces.

Gore's FLEX-LITE™ fiber optic cables and assemblies provide unparalleled attenuation and phase stability under temperature extremes, and are available in small, extremely flexible constructions.

Gore's patented expanded PTFE buffer system differentiates us from traditional fiber cables. Our buffer effectively decouples the optical fiber from other cable elements such as jackets and braids. As a result, optical performance of a Gore cable closely approximates that of a bare optical fiber even under mechanical or thermal stresses. This significant improvement in reliability is common to all of Gore's products including: ribbon cables, high strength tether cables, hybrid round cables, and simplex cables.

**FLEX-LITE™ Cable Features:**

- Stable Attenuation from -55°C to +150°C
- Low shrinkage
- Small size for tight spaces (0.6 mm and 1.2 mm diameters)
- Easy-to-handle, small profile fiber ribbons (fiber counts of 8 and 12)
- Low skew (< 2.0 ps/m)

**Flex-Lite High Reliability Fiber Optic Laminate**




Mismatches in thermal expansion (CTE) and elasticity between a glass fiber and extruded jackets cause substantial stress, microbending losses, and reduced fiber life. Gore's expanded PTFE buffering system is 70% air, and effectively isolates the fiber, eliminating optical performance degradation caused by temperature changes, flexure,or bending.

**Signal Transmission Solutions**

Gore has applied its 40 year experience in high frequency microwave and digital signal transmission to develop the premier fiber cable for environmentally challenging applications. Diverse applications have benefited from Gore's buffering system including Industrial, Telecom, High Speed Computing, Space, and Defense. Call now for complete details.

©1998 W. L. Gore & Associates, Inc.
FLEXLITE & GORE are trademarks of GORE
CTPress

W. L. Gore & Associates, Inc.
1901 Barksdale Road
Newark, DE 19714
Fax (302) 738-5993

**www.flexliteoptics.com**

**1-800-445-4673**

GORE

*Creative Technologies Worldwide*

# A GSM EDGE Error Vector Magnitude Estimation Platform for RFIC/ASIC Evaluation

*The Enhanced Data Rates for GSM Evolution (EDGE) air interface requires new components in current CAD tools to evaluate the performance of the IF/RF system. Analog integrated circuit designers in particular need to assess the linearity of their designs, expressed by the error vector magnitude (EVM) specifications for EDGE. This article describes an implementation of such a platform using an analog circuit design simulator, and compares the results with a mathematical package.*

The evolution of GSM (EDGE) and the linear modulation used (8-PSK) with both amplitude and gain variations come with new specification requirements regarding system linearity. The relatively new standard means that current CAD tools lack libraries and blocks to support this recent specification. Although most major electronic design software players are actively working along with their customers to create those needed libraries, designers, in the meantime, must build their own to evaluate their designs. Such a need arises for integrated circuit designers who want to assess the performance of their circuits against EVM specifications in the European Telecommunication Standard Institute (ETSI) standards in addition to their usual device characterization parameters. The main hurdle for them is to incorporate baseband digital blocks (EDGE modulation, EVM calculation) into an analog circuit simulation environment that works at IF/RF frequencies.

## EVM

The calculation of the RMS EVM is described in the ETSI standards.[1] This quantity assesses the modulation accuracy of the transmitted signal, which gives an indication of the linearity of the transmitter. Such information is in addition to the spectrum due to modulation and wideband noise requirements, which do not necessarily provide information on the linearity of the system. Under specified measurement conditions, the EVM calculation determines the error vector between the transmitted waveform and the ideally transmitted waveform at time kT (where T is the symbol

*[Continued on page 72]*

Ashkan Mashhour and Assaad Borjak
*Nokia Networks*
*Camberley, Surrey, UK*




Only $36.95 ea.(qty 1-49)

# 2W SMA DC to 18GHz ATTENUATORS

How can you buy attenuators that combine world renowned engineering expertise with high quality stainless steel construction, low cost, and off-the-shelf availability? Specify Mini-Circuits fixed attenuators! Built tough to handle 2 watts average with 125 watts peak power, this attenuator series supplies precision accurate 1dB to 40dB attenuation values with high temperature stability and excellent phase linearity in the wide DC to 18GHz band. Call Mini-Circuits and capture this next generation of value for your system integration today!

***Mini-Circuits...we're redefining what VALUE is all about!***



| Model | Attenuation (dB) Nominal | Accuracy* | Length (Inches) |
|---|---|---|---|
| BW-S1W2 | 1 | ±0.40 | .85 |
| BW-S2W2 | 2 | ±0.40 | .85 |
| BW-S3W2 | 3 | ±0.40 | .85 |
| BW-S4W2 | 4 | ±0.40 | .85 |
| BW-S5W2 | 5 | ±0.40 | .85 |
| BW-S6W2 | 6 | ±0.40 | .85 |
| BW-S7W2 | 7 | ±0.60 | .85 |
| BW-S8W2 | 8 | ±0.60 | .85 |
| BW-S9W2 | 9 | ±0.60 | .85 |
| BW-S10W2 | 10 | ±0.60 | .85 |
| BW-S12W2 | 12 | ±0.60 | .85 |
| BW-S15W2 | 15 | ±0.60 | .99 |
| BW-S20W2 | 20 | ±0.60 | .99 |
| BW-S30W2 | 30 | ±0.85 | .99 |
| BW-S40W2 | 40 | ±0.85 | .99 |

Equipped with SMA male and female connectors.
.312" across hex flats.
*At 25°C includes power and frequency variations up to 12.4GHz. Above 12.4GHz add 0.5dB typ. to accuracy.

***ALL VALUES IN STOCK***

Mini-Circuits® Celebrates Year 2000!

**Buy 1 Get 1 Free!**

Buy Up To 25 Units Of Each Model At The Regular Price
*Get An Equal Amount FREE!*
Offer expires May 31, 2000

**Mini-Circuits®**

US 96 INT'L 99
CIRCLE READER SERVICE CARD

P.O.Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

*The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At:* ***http://www.minicircuits.com***

time k∈Z), as shown in ***Figure 1***, through the measuring receiver filter.

The standards specify the measuring receiver filter for EDGE as a 90 kHz single-sideband bandwidth raised-cosine filter with a 0.25 rolloff factor.[1] Its impulse response and transfer function are defined as

$$RC_\alpha(t) = \sin c\left(\frac{t}{T_m}\right)\frac{\cos\left(\frac{\pi\alpha t}{T_m}\right)}{1-4\alpha^2\frac{t^2}{T_m^2}}$$

$$RC_\alpha(f) = \begin{cases} T_m & \text{for } |f| \le \frac{1-\alpha}{2T_m} \\ \frac{T_m}{2}\left[1+\sin\left(\frac{\pi T_m}{\alpha}\left(\frac{1}{2T_m}-|f|\right)\right)\right] & \text{for } \frac{1-\alpha}{2T_m} \le |f| \le \frac{1+\alpha}{2T_m} \\ 0 & \text{elsewhere} \end{cases}$$

where

$\alpha$ = 0.25 (the rolloff factor)

$T_m = \frac{1}{180\ \text{kHz}}$

Note that the receiver measurement filter is intended solely for measurement purposes and does not allow constellation recovery.

The standards do not define a receiver filter for EDGE; hence, a measurement receiver filter must be selected such that its time and frequency domain characteristics match those of a practical receiver filter. The EVM measurement using such a measurement receiver filter will then reflect actual system performance. The 90 kHz single-sideband raised-cosine filter defined earlier is a good candidate and has presumably been selected for its passband characteristics, which are dictated by EDGE channel spacing (200 kHz). However, the infinite impulse response of such a filter is somewhat impractical and, hence, EVM results may vary from one measurement instrument to another (depending on the implemented length of the measurement filter). In addition, depending on the arbitrarily chosen length, this filter may settle beyond the tail symbols in a GSM burst and therefore artificially degrade the EVM at either end of the useful part of the burst. As a way to overcome these problems, several proposals and change requests have been submitted to the standards body in order to define a universal filter.[3]

Referring to the ETSI standard,[1] the RMS vector error is defined as

$$EVM = \sqrt{\frac{\sum_k |E(k)|^2}{\sum_k |S_{ideal}(k)|^2}}$$

where

$S_{ideal}(k)$ = ideal transmitted signal at symbol time kT

$E(k) = S_{tx}(k) - S_{ideal}(k)$ (the residual error on sample $S_{ideal}(k)$)

The current specifications define EVM measurements at symbol times only (k∈Z), that is, the error for other samples (between symbols) is not accounted for. Whether or not all samples should be used in the EVM computation is a controversial issue and remains so far an open question. Likewise, note that poor spectral performance far from the carrier may have little impact on the EVM.




▲ *Fig. 1 The error vector between ideal and transmitted signals.*

[Continued on page 75]

MICROWAVE CONNECTORS & CABLE ASSEMBLIES...
FROM STOCK
Connectors
SMA
SMP
TYPE N
TNC
BNC
MCX
Field Replaceable
Panel Mount
Bulkhead
Radius Right Angle
Hermetic
Adapters
Cable Assemblies
Reformable Semi Rigid
Standard Lengths
Flexible
Low Loss Test Cables
ATLANTIC Microwave Limited
the POWER to DELIVER
Tel +44 (0)1376 550220
Fax +44 (0)1376 552145
E mail sales@atlanticmicrowave.co.uk
PLEASE QUOTE REF: MJ101 WHEN YOU CONTACT US
Atlantic Microwave Ltd 40A Springwood Drive Braintree Essex CM7 2YN England

# Get wireless and OEM components without high-wire prices.

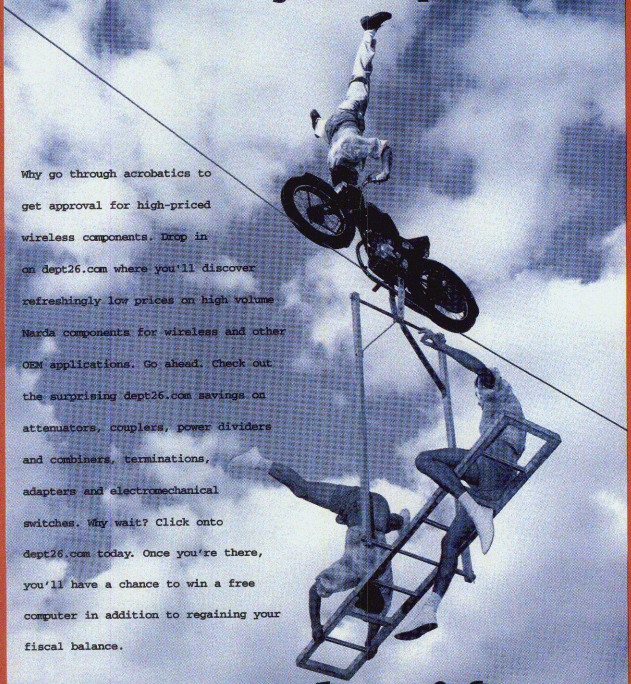

Why go through acrobatics to get approval for high-priced wireless components. Drop in on dept26.com where you'll discover refreshingly low prices on high volume Narda components for wireless and other OEM applications. Go ahead. Check out the surprising dept26.com savings on attenuators, couplers, power dividers and combiners, terminations, adapters and electromechanical switches. Why wait? Click onto dept26.com today. Once you're there, you'll have a chance to win a free computer in addition to regaining your fiscal balance.

## dept26.com

attenuators • couplers • power dividers

dept26
narda

switches • terminations • adapters

Narda Microwave-east, an L3 Communications Company

# Setting a New Standard of Excellence

## Rubidium Atomic Frequency Standards

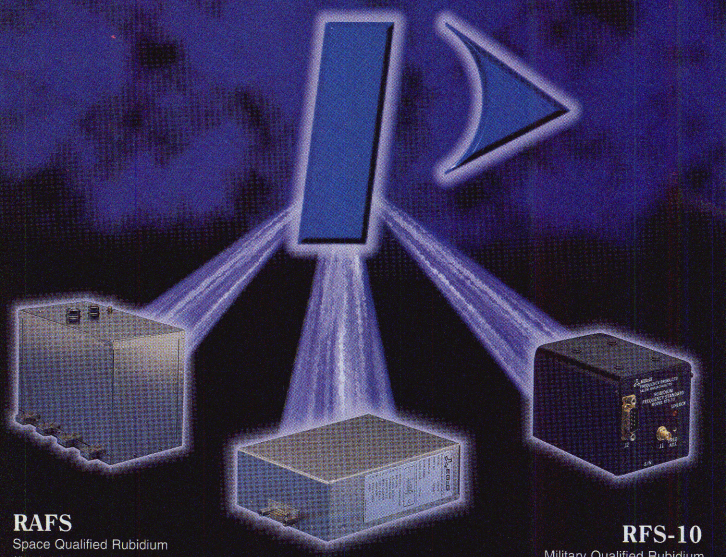

### RAFS
Space Qualified Rubidium

Allen deviation <3x10$^{-11}$/$\sqrt{\tau}$
Frequency drift <5x10$^{-13}$/day
High reliability: 458,000 Hr MTBF

### LPR10
Commercial Rubidium

Low profile (3.7"x5.0"x1.6")
Output frequency from 1Hz to 20MHz
Wide operating temperature range
Drift < 2x10$^{-11}$/year
Industry compatible footprint

### RFS-10
Military Qualified Rubidium

Fast warm-up
Qualified rugged design
Small Size (2.75"x2.75"x4")
Drift < 2x10$^{-11}$/year
Low drift option available
Low noise version available

Rubidium standards from PerkinElmer Optoelectronics (formerly EG&G) meet many of the challenges facing today's end user. From high performance space qualified clocks to low cost commercial models, our units provide exceptional short and long term stability while operating over wide temperature ranges. Readily available off-the-shelf products or custom models specifically tailored to meet your requirements make PerkinElmer Optoelectronics the logical choice for any rubidium standard application.

PerkinElmer
Optoelectronics

CIRCLE 122 ON READER SERVICE CARD

EVM is a digital domain characterisation parameter but it is used to evaluate analog circuits. The GSM EDGE standards, listed in ***Table 1***, indicate several EVM specifications for both mobile and base station use.

## SYSTEM IMPLEMENTATION

The platform described here is targeted at IC or board-level designs. Hence, widely used simulation packages have been chosen to perform the simulations. The analog circuit simulation environments are Affirma™ Analog Artist® and Spectre RF® Custom blocks are implemented using proprietary programming languages (Verilog-A (AHDL)); postprocessing uses OCEAN. The analog simulator's results are benchmarked with MATLAB®/Simulink® simulations.

The evaluation of EVM is paramount to IC designers who require both EDGE modulation generating blocks and EVM calculation blocks in their simulation environment. It is quite convenient to be able to perform all of the simulations in a single environment rather than simulating the circuits and exporting results data to another package for postprocessing. Integrating all the tools into the analog circuit simulator has been the driving idea behind the presented platform.

The system setup is shown in ***Figure 2***. The transmitted waveform path consists of a PRBS 8-level first block that generates a pseudorandom sequence of numbers ranging from 0 to 7. This configuration is followed by an offset 8-PSK block that generates the corresponding complex offset 8-PSK signal (rotated by $3\pi/8$). These two blocks are clocked by a reference clock set at the symbol rate for GSM EDGE ($T \approx 3.69\ \mu s$). The resulting complex waveform is then filtered by the Gaussian-like pulse shaping transmitter filter (EDGE pulse shaping filter) specified in the ETSI standard[2]. Next, the device under test (DUT) (here, a RFIC/ASIC) is placed in the path, and the output signal is fed through the receiver measurement filter (raised cosine). Optionally, an upconversion/downconversion stage with adequate filtering can be fitted to bring the baseband signal up to the DUT working frequencies. The ideal waveform path is identical without the DUT. It is essential to incorporate into this ideal transmitted path all the ideal

**TABLE I**

**BTS AND MS EVM SPECIFICATIONS**

| | Base Station | | Mobile Station | |
|---|---|---|---|---|
| | Nominal Conditions | Extreme Conditions | Nominal Conditions | Extreme Conditions |
| RMS EVM (%) | ≤ 7 | ≤ 8 | ≤ 9 | ≤ 10 |
| Peak EVM (%) | ≤ 22 | ≤ 22 | ≤ 30 | ≤ 30 |
| 95th percentile (%) | ≤ 11 | ≤ 11 | ≤ 15 | ≤ 15 |

*Fig. 2 Ideal and transmitted waveform paths for EVM measurement.*

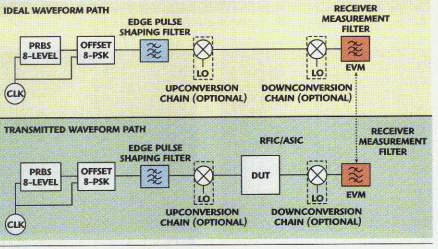


FOAM
microwave absorbers
www.arc-tech.com
978-388-2993
ARC TECHNOLOGIES, INC.



CIRCLE 22 ON READER SERVICE CARD

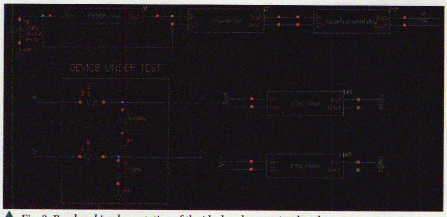


▲ *Fig. 3 Baseband implementation of the ideal and transmitted paths.*



▲ *Fig. 4 Ideal pulse-shaped GSM EDGE constellation diagram.*



▲ *Fig. 5 Transmitted constellation after FC filter DUT.*

characteristics of the DUT (such as gain, phase and delay) so that those characteristics are compensated for when compared to the transmitted path (calibration/normalization). In other words, only the nonidealities of the DUT will affect the EVM (gain compression, phase shift, nonconstant group delay, etc.).

The receiver measurement filter (referred to as the ETSI_Filter) block uses the raised-cosine filter described previously. However, a finite number of taps has been used to represent it (finite-duration impulse-response (FIR)), with $T_m$ = 1/180 ms, 10 samples/$T_m$ and FIR length of [$-10T_m$; + $10T_m$]. The output and input impedances of the blocks, respectively, at the input and output of the custom coded blocks should be carefully matched to the DUT.

## ANALOG SIMULATION ENVIRONMENT RESULTS

The simulation environment is shown in ***Figure 3***. The DUT is a simple RC network where R = 4 kΩ and C = 200 pF. The delay introduced is accounted for in the EVM calculation (reference signal delayed). However, it should be noted that the EVM calculation was performed on all sampled values as well as on samples spaced at every symbol time T. The source code for these blocks is given partially in ***Appendix A***; some simulation results are provided in ***Figures 4***, ***5***, ***6*** and ***7***.

The all_points (all samples) calculated error is EVM ≈ 6.61 percent. It is necessary to estimate the delay introduced by the DUT in order to compare the ideal and transmitted path waveforms. A first-order approximation of this delay is the average group delay over the frequency band of interest. A simple zero crossing method was used here; however, more accurate methods such as correlation can be used.

Mixing baseband and IF/RF signals in a simulation is computationally greedy and time consuming. In time domain simulation mode (transient + steady state), short time steps and long simulation times to represent both IF/RF and baseband signals, respectively, make the simulation inefficient timewise. However, there is no alternative to this approach.

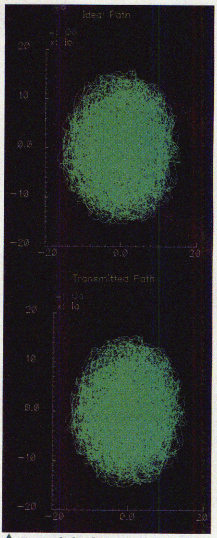


▲ *Fig. 6 Ideal and transmitted constellation diagrams after raised-cosine receiver measurement filter.*



▲ *Fig. 7 Delay introduced by the RD network DUT.*

## MATHEMATICAL SIMULATION ENVIRONMENT RESULTS

Benchmarking of the results produced by the analog simulator is achieved with MATLAB/Simulink. The simplicity of the DUT used here easily allowed it to be represented in Simulink. For a real IC, this easy representation may not be possible. The

*[Continued on page 78]*

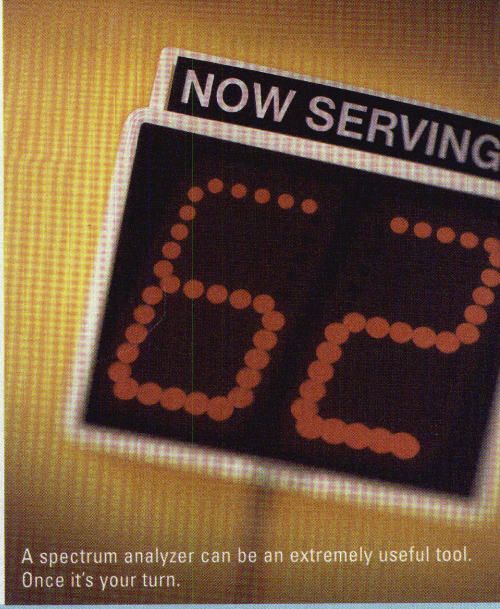


A spectrum analyzer can be an extremely useful tool. Once it's your turn.



Agilent's ESA-L Series Spectrum Analyzer

- 1.5, 3.0 & 26.5 GHz frequency coverage
- +/- 1.1 dB amplitude accuracy
- 5 ms sweep time
- 3 year warranty

**Affordable Spectrum Analysis for every bench.** Your days of sharing equipment are numbered. Agilent Technologies' ESA-L series of spectrum analyzers are affordable enough to have on every bench. And accurate enough to deserve the space. How accurate? The ESA-L series has background auto-alignment for continuous calibration. The frequency accuracy of a continuously phase-locked synthesizer. And a dynamic range wide enough for just about any distortion test. Not to mention best-in-class measurement speed. When you need product specs and application information, it's as easy as visiting our web site or giving us a call. All of this is done with one purpose in mind: helping you meet any challenge that comes along. Including making sure it's always your turn.

www.agilent.com/find/ESA-L

**Agilent Technologies**
Innovating the HP Way

©1999 Agilent Technologies ADSPP2021/INTL
Argentina (54 1) 787-7115 • Austria (81) 25006-7006 • Australia 1 800 629 485 • Belgium (32/2) 716-34-17 • Brazil (55-11) 7297-8600 • Canada 1-877-894-4414
Czech Republic (420) 2 61307111 • Denmark (45) 45 95-10-00 • Finland (358) 8872 2100 • France (81) 69 28 41 14 • Germany (0180) 524-6337 • Greece (30/1) 7264445
Hong Kong (852) 2599 7889 • Hungary (36) 1 4018311 • India (91 11) 690 6184 • Ireland (01) 615 8222 • Israel (972 03) 538-69-49 • Italy (39 02) 92 122 241 • Japan (0120) 333 4811
Korea (82 2) 769 0900 • Malaysia 1 800 80 3848, (6 03) 291 6213 • Mexico 525-5 228-4284 • Netherlands (020) 547 7222 • Norway (47) 22 73 57 59 • Philippines (632) 814 3882
Poland (48) (022) 6087200 • PRC 800 810 0189, (86 10) 6504 5200 • Singapore 1800 375 8100 • Spain (34) 91 631 1323 • Sweden (46)(8) 444 22 77 • Switzerland (01) 735 72 38
Taiwan (02) 212 535, 0800 47866 press 1 • Thailand (66 2) 661 3999, (088) 223 802 • United Kingdom (01344) 366666 • Venezuela (58-2) 207-8357
*Telephone Charge per Unit Time = 0.24 DM/Min

**CIRCLE 6 ON READER SERVICE CARD**

Simulink setup is shown in ***Figure 8***. The same results are obtained as with the analog simulator and are shown in ***Figures 9, 10*** and ***11***. The all_points (all samples) calculated error is EVM ≈ 6.73 percent. Note that the variation is a result of variable time steps taken in Simulink being different from those in Analog Artist.

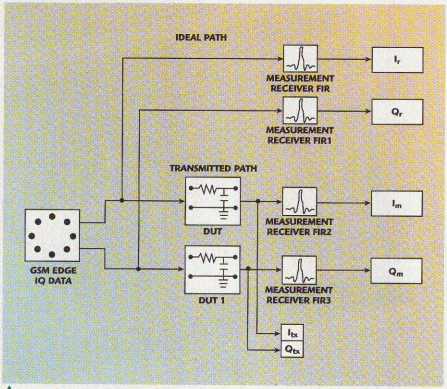


▲ *Fig. 8 The Simulink setup.*




▲ *Fig. 9 An ideal pulse-shaped GSM EDGE constellation.*




▲ *Fig. 10 The transmitted constellation after the DUT.*

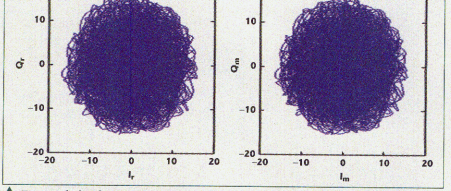


▲ *Fig. 11 Ideal and transmitted constellations after the receiver measurement filters.*

## CONCLUSION

This article has discussed EVM measurements for GSM EDGE designs and the need to perform such evaluations for analog RFIC/ASIC designers according to the standard specifications. It also described a simulation platform useful for evaluating EVM for analog ICs designed for GSM EDGE. Additional information on the presented material and source code can be obtained from the authors.

## ACKNOWLEDGMENT

The authors would like to thank Jason Drew and Eddie Riddington, both of Nokia Networks, for their useful advice and input on RFIC design requirements and GSM standards. Affirma Analog Artist and Spectre RF are registered trademarks of Cadence Design Systems. Simulink and MATLAB are registered trademarks of The Math Works Inc. ■

## References

1. "Draft GSM 05.05 V8.0.0 – Digital Cellular Telecommunications System (Phase 2+) Radio Transmission and Reception," *ETSI*, July 1999.
2. "GSM 05.04 V8.0.0 – Digital Cellular Telecommunications System (Phase 2+) Modulation," *ETSI*, March 1999.
3. Hewlett-Packard, "A New Measurement Filter for EDGE," *ETSI*, SMG2 WS #11, Austin, October 1999.
4. Ashkan Mashhour, "Understanding Offset 8-PSK Modulation for GSM EDGE," *Microwave Journal*, Vol. 42, No. 10, October 1999, pp. 78–92.

**Ashkan Mashhour** *received his Diplôme d'ingénieur from ENST, Bretagne, France, and his MSc from University College London, UK, both in 1997. He then joined Nokia Networks, Camberley, UK, where he currently works as an RF design engineer. He is involved in the development of new RF technologies and transceiver architectures for future-generation base stations. Mashhour can be reached via e-mail at Ashkan.Mshhour@nokia.com.*

**Assaad Borjak** *received his PhD from UMIST, UK in 1993. He has held numerous research and senior-level engineering positions at UCL, Nera Telecoms and, currently, Nokia Networks, Camberley, UK, and has several years of experience within the RF and microwave industries. His main interests are circuits and systems for wireless communications. He has published extensively in those fields and is a senior member of the IEEE. Borjak can be reached via e-mail at Assaad.Borjak@nokia.com.*

*[Continued on page 80]*

# Get Real.

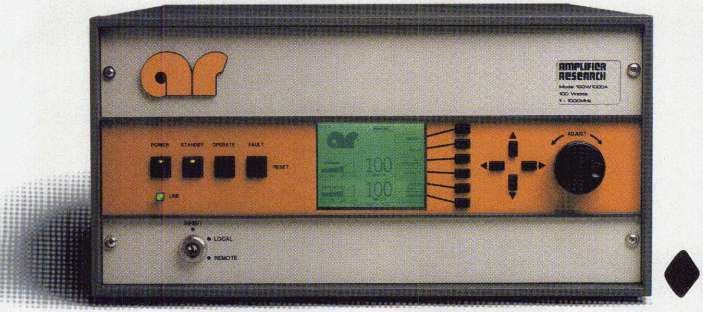


*Other amps can get you the power they promise. The numbers you see on the monitor match those on the spec sheet. Mismatch is low. VSWR 1:1.*

*Dream on.*

*Mismatch is reality in 99% of all test scenarios. Amps are routinely asked to output into really high VSWR ratios. And if they fold back (most do), well, you're out of luck and out of power.*

*AR amps to the rescue.*

*Delivering 100% rated power to the load, even in brutal VSWR. Built for the reality of really hostile test environments. Performance guaranteed.*

*Want to know more about the better brand of Class A amplifiers from the world class manufacturer of RF test instruments?*

***www.ar-amps.com/@/mj-real***

ISO 9001 Certified

Copyright© 1998 Amplifier Research. The orange stripe on AR products is Reg. U.S. Pat. & Tm. Off.

AMPLIFIER RESEARCH

*The Force Behind The Field.*

USA 215-723-8181 or 800-933-8181 for an applications engineer.
In Europe, call EMV– Munich: 89-614-1710 • London: 01908-566556 • Paris: 1-64-61-63-29 • Amsterdam: 31-172-423-000

## APPENDIX A

### SIMULATION FILES SOURCE CODE (ANALOG ARTIST):

**Verilog-A code for the PRBS8Level custom coded block**

```
// VerilogA for Aug4, PRBS8Level, veriloga

`include "constants.h"
`include "discipline.h"

module PRBS8Level(Iin,Iout);
input Iin;
electrical Iin;
output Iout;
electrical Iout;

parameter integer start_range = 0;

integer seed, end_range;
real rrandnum;
real rrandnum2;
integer rrandnum1;
integer count;
analog begin
    @(initial_step) begin
    seed = 0;
    end_range = 7;
    count = 0;
    end

    @(cross(V(Iin)-0.5,1,0.1n,1e-6))
    begin
    rrandnum = $dist_uniform(seed,start_range,end_range);
    rrandnum1 = rrandnum;
    rrandnum2 = rrandnum1;
    end

    V(Iout) <+ rrandnum2;
end

endmodule
```

**Verilog-A code for the Offset8PSK custom coded block**

```
// VerilogA for demo, Offset8PSK, veriloga

`include "constants.h"
`include "discipline.h"

module Offset8PSK(Iin,Iout,Qout,clk);
input Iin;
electrical Iin;
output Iout;
electrical Iout;
output Qout;
electrical Qout;
input clk;
electrical clk;

integer counter;

real DataIn1, DataIn2, edgetime;
parameter real pi = 3.14159265358979;

real iin_int;

analog begin

    @(initial_step)
    begin
        DataIn1 = pi/2;
        DataIn2 = 0;
    end

    @(cross(V(clk)-0.5,1,0.1n,1e-6))
    begin
        counter = counter + 1;
        edgetime = $realtime;
        iin_int = V(Iin);
        DataIn1 = 2*pi/8*iin_int+3*pi/8*counter;
        DataIn2 = 2*pi/8*iin_int+3*pi/8*counter;
    end

    if ($realtime > (edgetime+10e-9)) begin
        DataIn1 = pi/2;
        DataIn2 = 0;
    end

    V(Iout) <+ cos(DataIn1);
    V(Qout) <+ sin(DataIn2);

end
endmodule
```

**Verilog-A code for the EdgeTransmitFilter custom coded block**

```
// VerilogA for EdgeEVM, EdgeTransmitFilter, veriloga

`include "constants.h"
`include "discipline.h"

module EdgeTransmitFilter(Iin,Qin,Iout,Qout);
input Iin;
electrical Iin;
input Qin;
electrical Qin;
output Iout;
electrical Iout;
output Qout;
electrical Qout;

parameter real T = 1.846153846153846e-06;

real VIin, VQin;

analog begin
    VIin = V(Iin);
    VQin = V(Qin);

    if ($realtime < T) begin
        VIin = 0;
        VQin = 0;
    end

    V(Iout) <+ zi_nd(VIin,
    [0,7.1853e-4,0.03146,0.2604,0.70566,0.9268,0.70574,0.26052,
0.03155,7.50673e-4,3.85144e-6],
    [1],
    T,1e-8,1e-9);
    V(Qout) <+ zi_nd(VQin,
    [0,7.1853e-4,0.03146,0.2604,0.70566,0.9268,0.70574,0.26052,
0.03153,7.50673e-4,3.85144e-6],
    [1],
    T,1e-8,1e-9);

end

endmodule
```

**Verilog-A code for the ETSI_Filter custom coded block**

```
// VerilogA for Aug4, ETSI_Filter, veriloga
`include "constants.h"
`include "discipline.h"

module ETSI_Filter(Iin,Qin,Iout,Qout);
input Iin;
electrical Iin;
input Qin;
electrical Qin;
output Iout;
electrical Iout;
output Qout;
electrical Qout;

parameter real T = 5.5556e-07;

analog begin
    V(Iout) <+ zi_nd(V(Iin),
// Measurement filter coefficients, not included
    [.....],
    [1],T,1e-8,0);
```

*[Continued on page 82]*

# All the Leading Interconnect & Passive Brands. One Source. Richardson Electronics



Sourcing all your interconnect products can be confusing, but choosing the right supplier is easy.

Turn to Richardson Electronics for a complete line of interconnect products ranging from MMCX to 7/16 from the brands you trust.

Richardson's distribution and product value-added services enable them to handle your standard and custom requirements. They are committed to providing you:

- The widest range of microminiature connectors
- Every configuration of coaxial cable assemblies
- Bulk head receptacles, panel mount, pc board surface mount and 7/16 connectors
- EMP protectors
- Hard to find between-series adaptors

In addition to quality products, Richardson can provide technical support to assist you in identifying the right product for your application.

Wouldn't it be nice if all decisions were as easy as choosing Richardson Electronics? Call your local sales representative today with your interconnect requirements.




**More than 60 locations to serve you: Australia:** Castle Hill, ACN 089 808 108, +61 (2) 9894-7288, Bayswater, ACN 089 808 108, +61 (3) 9738-0733, **Brazil:** São Paulo, +55 (11) 820-6199, **China:** Shanghai, +86 (21) 6440-0807, **Colombia:** Santa Fe de Bogota, DC, (57-1) 636-1028, **France:** Colombes Cedex, +33 (1) 55.66.00.30, **Germany:** Puchheim, +49 (89) 890 214-0, Hamburg, +49 (40) 555 88 410, **Italy:** Sesto Fiorentino (FI), +39 (055) 420831, Agrate Brianza (MI), +39 (039) 653145, Roma, +39 (06) 41.73.37.51, **Japan:** Osaka, +81 (6) 6314-5597, Tokyo, +81 (3) 5215-1577, **Korea:** Seoul, +82 (2) 539-4731, **Mexico:** Mexico City, +52 (5) 674-2228, Guadalajara, +52 (3) 645-4641, **Netherlands:** Amsterdam, +31 (20) 446 7070, **Philippines:** 63-2-633-9480, **Singapore:** +65 487-5995, **Spain:** Madrid, +34 (91) 528 3700, Barcelona, +34 (93) 415 8303, **Sweden:** Stockholm, +46 8 564 705 90, **Taiwan:** Taipei, +886 (2) 88915238, **Thailand:** Bangkok, +66 (2) 749-4402, **Turkey:** Ideverit Istanbul, +90 212 264 3721, **United Kingdom:** Lincoln, +44 (1522) 542631, Slough, +44 (1753) 733010, **Vietnam:** Ho Chi Minh City, +84 8.811.1919, for other international inquires call (630) 208-2200. © 2000 Richardson Electronics. MK0328.

Richardson Electronics

Engineered Solutions

Visit our online catalog at catalog.rell.com

**1-800-RF POWER • 1-800-737-6937 • www.rfpowernet.com • ssc@rell.com**

## APPENDIX A (cont.)

```
V(Qout) <+ zi_nd(V(Qin),
// Measurement filter coefficients, not included
    [-----],
    [1],T,1e-8,0);
end
endmodule
```

### OCEAN script for EVM post-processing calculation

```
;;;
```

# NEW! SXH-1 High Linearity Power Amplifier













**As low as $4.25 in quantity**

**Stanford Microdevices** produces the highest performance products utilizing cutting edge technology at the lowest possible cost. All Stanford MMICs are 100% tested and qualified annually to ensure reliable field performance even under the harshest environments, making Stanford Microdevices a favorite among major OEMs worldwide. Over the past five years Stanford Microdevices has become the preeminent leader in the design and manufacturing of GaAs, LDMOS and SiGe amplifier and switch products.

Offering significant advantages over existing competitive MESFET technology, the SXH-1 is a highly efficient GaAs Heterojunction Bipolar Transistor power amplifier housed in a low-cost surface-mountable plastic package.

This GaAsHBT amplifier is fabricated using molecular beam epitaxial growth technology, which produces reliable and consistent performance from wafer to wafer and lot to lot. The SXH-1 was specifically designed for use as drivers stages for infrastructure equipment in the 50-2000MHz cellular, ISM and narrowband PCS bands. Operating at a stingy 95ma of current, the SXH-1 is an ideal choice for multi-carrier as well as digital applications.

**Performance Matrix**
SXH-1

| Freq. (MHz) | Gain (dB) Typ. | S11 Typ. | S22 Typ. | P1dB (dBm) | TOP (dBm) | Voltage | Current (mA) Typ. |
|---|---|---|---|---|---|---|---|
| 800-960 | 20.0 | 13.1 | 1.9:1 | 22.0 | 35.0 | 5.0 | 95.0 |
| 1800-2000 | 18.0 | 13.1 | 1.9:1 | 22.0 | 35.0 | 5.0 | 95.0 |

***For performance, reliability and value, turn to Stanford Microdevices.***

**ALSO COMING SOON!**
**SXL/SXT CELLULAR & PCS BAND POWER AMPLIFIERS.**

Stanford Microdevices

*We Deliver RF Innovation*
**1-800-764-6642**
***www.stanfordmicro.com***

All company and/or product names are trademarks and/or registered trademarks of their respective owners.

**CIRCLE 154 ON READER SERVICE CARD**

# THE EFFECT OF IMPERFECT ANTENNA CROSS-POLAR PERFORMANCE ON THE DIVERSITY GAIN OF A POLARIZATION-DIVERSITY RECEIVING SYSTEM

*The achievement of diversity gain relies on the realization of two signal branches with low signal correlation. A statistical technique is used to simulate the coupling between the channels and quantifies the effect of cross-polar coupling as a function of the intrinsic correlation of the received signals and the coupling introduced by the antenna. The definition of polarization orthogonality is examined, and both rigorous and approximate methods of measurement are described.*

The use of diversity reception in mobile radio systems relies on the realization of two receive signal paths in which the variation of signal level with time is to some extent uncorrelated. The dependence of the achieved diversity gain on the correlation existing between the two paths has been established by a number of investigators.[1] In polarization diversity systems the signal paths are differentiated by the use of two receiving antennas, which respond to orthogonally polarized components of the received signal. It is clear that imperfect cross-polar discrimination at the receiving antennas forms a mechanism that couples the polarization components and increases the correlation between the two branches of the diversity system. This imperfection will reduce the achieved diversity gain compared with that realized when using a perfect antenna. The diversity gain of the system is a function of the correlation between the signals presented to the receivers; their correlation is a function of the transmission path and the finite cross-polar coupling introduced by the receiving antennas.

## MODELING THE SIGNAL BRANCHES

The method used in this article utilizes two signal branches carrying uncorrelated pseudo-random signals with equal mean levels. Two mixing processes are then introduced, one

*[Continued on page 86]*

BRIAN S. COLLINS
*CSA Wireless*
*Elk Grove Village, IL*

# On the Frontier of Innovation

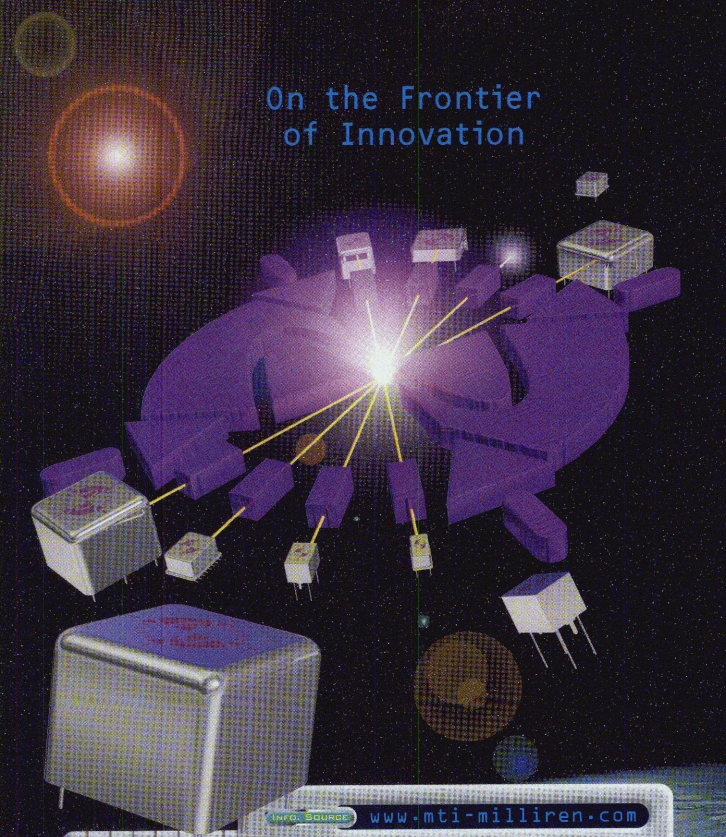

INFO SOURCE www.mti-milliren.com

MTI-Milliren Technologies, Inc. is committed to research and development that focuses on both product innovation and enhanced manufacturing techniques. We are today on the dawn of a new era, with the launch of several exciting products that will redefine the standard in Quartz Crystal Oscillator technology. We continue to push the boundaries of technical performance, packaging innovation and competitive pricing across our full OCXO, VCXO and TCXO product range. Visit our Web site or contact us directly for detailed product information or to discuss your frequency and timing application.

MTI
MTI-MILLIREN TECHNOLOGIES, INC.

Two New Pasture Road, Newburyport, MA 01950 USA • Tel: 978.465.4064 Fax: 978.465.6637

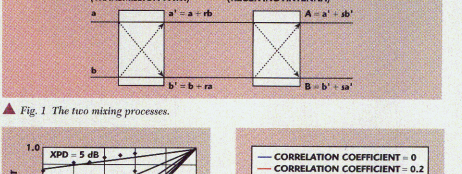


▲ *Fig. 1 The two mixing processes.*




▲ *Fig. 2 Correlation of incoming signals and the resulting output from a dual-polar antenna with finite XPD.*




▲ *Fig. 3 The relationship between diversity gain and signal path correlation.*




▲ *Fig. 4 The reduction in diversity gain as a function of antenna XPD and the correlation of the incoming orthogonal signal components.*




▲ *Fig. 5 The relationship between diversity gain and the relative levels and correlation of the signals in a two-branch diversity system with maximal-ratio combining.*[3]

corresponding to the transmission path and the other to the receiving antenna, as shown in ***Figure 1***. To model the arriving signals a mixing process is used to increase the correlation between channels to the extent required to model a real transmission environment. The objective is to create a pair of signals with a correlation $C_p$ that can be adjusted to accomodate values typical of a transmission path (not to model the actual processes in a real transmission path, which are entirely different).

For the purpose of simulation the two signal paths contain initial uncorrelated signals a and b. At the end of the first mixing process the signals have a correlation coefficient determined by the mixing fraction r, which is chosen to establish the required path correlation $C_p$. The second process represents the receiving antenna in which some fraction s of the orthogonal signal is coupled into the co-polar output. The parameter s is the cross-polar discrimination (XPD) of the antennas with respect to the orthogonal reference polarization pair and is assumed to have the same value for both channels — a correct assumption for any antenna with symmetrical elements for the two polarizations. (It would be simple to extend the present method to any chosen unsymmetrical pair of coupling factors.)

The simulation was run on a Microsoft Excel spreadsheet using two sets of 1000 pseudorandom numbers to represent the signals on each path and making use of the correlation function provided by the program. The mixing ratio for the first process was adjusted to achieve successive output correlations of 0.1, 0.2, 0.3... 0.7. For each of these values of the signal correlation over the transmission path the second mixing fraction was given values representing antenna XPDs of 5, 10, 15...30 dB. Each trial was run with 10 sets of 1000 random signal values. The values of path correlation, XPD and resulting output signal correlation were plotted, as shown in ***Figure 2***. The slight scatter of the data points results from the statistical nature of the approach used and can be reduced by increasing the number of trials or the number of data points in each trial.

## RESULTS

The dependence of output signal correlation on path correlation is essentially linear; the output correlation is always greater by an amount that depends on the XPD of the receiving antenna and the initial path correlation. The form of the result is not surprising since three lines could be drawn by examining extreme situations. If the input correlation is 1 then the resulting correlation will be 1 for any antenna XPD, establishing a point of convergence for all curves at 1,1. If the antenna has 0 XPD then the output correlation is 1 for any input correlation, establishing the line forming the top of the plot as the result for XPD = 0 dB. Finally, if the antenna has perfect XPD, then the resulting correlation of the output signals will be the same as the correlation of the signals in space. Given that all results will be contained within these straight lines, the simple dependence of input and output corre-

lation coefficients is not surprising. When the input signals have low correlation the effect of antenna XPD is large, but as the signal correlation increases the effect of finite antenna XPD diminishes.

The diversity gain of a two-branch system is not a linear function of the correlation of the signals in the two branches. For a signal reliability of 90 percent the diversity gain of a two-branch system begins to fall rapidly only when the branch signal correlation rises above approximately 0.7. To determine the effect of antenna XPD on diversity gain it is necessary to determine the diversity gain associated with each value of input and output correlation coefficient. This analysis has been done using the curves provided by Ling[1] as shown in ***Figure 3***, which displays two correlated paths for a matched filter used for quadrature phase-shift keying and biphase-shift keying applications. The coefficient of correlation $\eta = C_{ov}(x,y)/\sqrt{Var(x)Var(y)}$. The change in diversity gain for a signal reliability of 90 percent produced by the imperfect XPD of the receiving antenna is plotted as a function of the XPD and the incoming signal correlation shown in ***Figure 4***.

For the sake of completeness, the full relationship between signal branch amplitude inequality and correlation is shown in ***Figure 5***. In a situation in which there is a large signal in one channel and a small signal in the other, no effective loss of communication results if some of the large signal is mixed into the low amplitude channel, even if the result is complete cancellation of the lower signal. When the larger signal fades, the existence of channel coupling has little effect on the low level signal. For this reason, the consideration of the effect of finite XPD on diversity gain contained in this article concentrates on the situation in which comparable signal amplitudes are present in both diversity branches.

## THE EFFECT OF XPD ON DIVERSITY GAIN

The imperfect XPD of a practical dual-polar receiving antenna will cause a small reduction in the diversity gain, which could potentially be obtained by exploiting the partially uncorrelated nature of the signal components received with orthogonal polarizations. A typical loss of diversity gain of 0.5 dB is produced by an antenna XPD of approximately 17 dB, and a loss of 1 dB is produced by an antenna XPD of 12 dB. On boresight a typical dual-polar antenna will provide an XPD of 20 dB; at the sector edge (60° from boresight) the XPD will have fallen to approximately 12 dB. The consequent 0.5 dB decrease in diversity gain between the center and edge of the sector is comparable with that of a typical space-diversity system where the lateral spacing of the receiving antennas decreases as the received signal moves off the axis of the antennas.[3] The extent of lost diversity gain is only weakly dependent on the correlation of the incoming signal: As the signal correlation increases from 0 to 0.6, the effect of finite XPD typically reduces the available diversity gain by approximately 0.3 dB.








CIRCLE 46 ON READER SERVICE CARD




▲ *Fig. 6 The polarization components of an electromagnetic wave.*

## DEFINITIONS AND MEASUREMENT METHODS

In the previous analysis the term XPD was used without careful definition of its method of measurement. The polarization performance of a base station receiving antenna varies as a function of the angle of arrival of the received signal; an actual antenna radiates (or optimally receives) an elliptically polarized wave with a particular orientation and eccentricity. The polarization ellipse of the signal changes as a function of frequency and of direction in azimuth and elevation. For most types of slant-polar base station antennas the polarization angle is close to 45° on boresight. However, as the observer moves from boresight, the antenna polarization moves toward the vertical, thus the polarizations received by the two ports converge.

There are several different methods for measuring the polarization performance of a base station antenna. Complete characterization can be accomplished only by measuring the complex components of the field radiated/received by the antenna ($E_V$ and $E_H$) and computing the polarization ellipse for each spacial direction and frequency. Experiments conducted by others to establish the usefulness of polarization diversity have assumed that the receiving antenna responds to orthogonal linearly polarized signal components with polarization angles of +45° and –45°. For this reason — and because of the simplification of the required measurements — all measurements in this analysis are performed using plane-polar illumination with polarization angles of +45° and –45°. Measurements of radiation patterns in which the antenna under test is illuminated with these two orthogonal polarizations provide a description of polarization behavior that is sufficient to allow the effect of polarization performance on diversity gain to be defined. This method is simple to carry out and requires no complex assumptions or calculations.

The use of XPD in this article differs slightly from its general use. The reference polarizations are considered to be a fixed orthogonal pair of linear polarizations (not the exact co- and cross-polar planes for the two parts of the antenna under test as the two co-polar planes may not be mutually at right angles). The result is a simple and self-consistent set of definitions and parameters, which, as is demonstrated, relate easily to the propagation studies carried out by others.

Some antenna specifications include diversity gain as an antenna parameter. This specification is not appropriate since diversity gain is a function of the signal transmission path (and a defined level of signal reliability) as well as antenna performance and the combining method. Separate definitions of orthogonality are not required if the polarization behavior is measured using orthogonal fields as described previously. Measurements of radiation patterns using linear reference polarizations of +45° and –45° generally provide adequate data to characterize the cross-polar performance of base station antennas.

## THE PHENOMENON OF POLARIZATION

Most radio engineers are familiar with the concept of polarization as describing the plane of the electric field of an electromagnetic wave. In general, the waves are perceived as essentially linearly polarized (with a few special applications in which the wave is circularly polarized). By contrast, radio astronomers (and many HF radio engineers) deal with received signals with polarizations that are often entirely arbitrary and from which no single real antenna can abstract all of the energy incident on the effective aperture of the antenna.

Any electromagnetic wave can be envisioned as having polarization components, as shown in ***Figure 6***. (In the mobile radio environment the two field components are relatively independent of one another in amplitude and phase. In general, it is not possible to sum the vectors into a single direction containing the entire signal power because the vectors are not mutually in phase. The magnitude and phase relationship of the vectors changes rapidly with time, so the sum vector traces out an ellipse whose eccentricity and orientation depend on the relative magnitudes and phases of the components.) To simplify the notation imagine a wave traveling parallel with the surface of the ground and the electric field characterized by two components $E_V$ and $E_H$ mutually at right angles. These components have a phase difference $\theta$, which can be determined by measurement. Because of this phase difference the two field components cannot be summed simply by drawing the usual simple vector sum.

### Special Cases

There are two special cases of polarization state that are familiar to everyone. When describing polarization the standard convention is to look at the signal in the direction of propagation (as if the observer is standing behind the transmitting antenna). When $\theta = 0°$ the two components are in phase and the components can be summed in the usual way. This condition is the special case of linear polarization. The plane of polarization is determined by the relative magnitude of the two components $E_V$ and $E_H$ and a polarization angle is defined as $\phi = \tan^{-1}(E_V/E_H)$.

If $E_V = 0$, then the signal polarization is described only by $E_H$, thus the signal is horizontally polarized. Similarly, when $E_H = 0$ the signal is vertically polarized. If $E_V = E_H$ (and at the same time $\theta = 0°$), the signal is polarized at 45°; if $E_V = -E_H$ (that is, $\theta = 180°$), the polarization is –45°. If $E_V = E_H$ and the two vectors are in phase quadrature (±90°), the resulting signal is circularly polarized (CP). (The sense of rotation depends on the + or – sign.)

### The General Case

Apart from the linear and circularly polarized special cases, all other signals are elliptically polarized, hav-

*[Continued on page 90]*

## Designed for Ultimate Quality

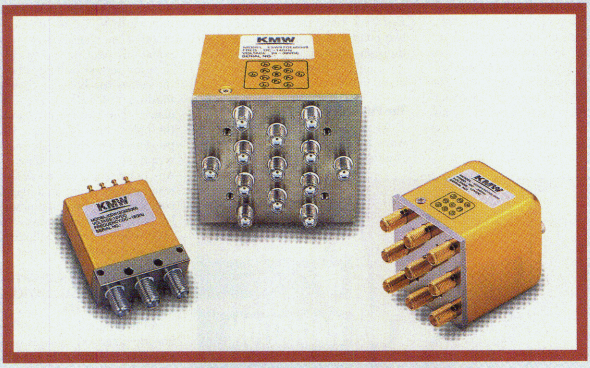


# Your Complete Switching Solution from KMW

■ 6P7T switch is designed for IMT2000 (6-sector Redundancy)

| Product Code No. | KSW12OI2S000 | KSW67O4AB001 | KSW45O48L000 |
|---|---|---|---|
| Switch Type | SPDT | 6P7T | 4P5T |
| Frequency Range | DC ~ 18GHz | DC ~ 3GHz | DC ~ 3GHz |
| Insertion Loss (Max.) | 0.2 ~ 0.5dB | 0.2dB | 0.2dB |
| VSWR (Max.) | 1.15:1 ~ 1.5:1 | 1.15:1 | 1.15:1 |
| Isolation (Min.) | 80 ~ 60dB | 80dB | 80dB |
| Operating Mode | TTL Latching with IND. | Latching with IND. | Latching |
| Actuating Voltage /Current (Max.) | 12Vdc ± 10% /240mA (@12Vdc, 25°C) | 20 ~ 30Vdc /95mA (@24Vdc, 25°C) | 24 ~ 30Vdc /85mA (@26Vdc, 25°C) |
| I/O Port Connector | SMA(F) / SMA(F) | SMA(F) / SMA(F) | SMA(F) / SMA(F) |
| RF Power Handling | 100W CW (@1GHz) | 200W CW (@1GHz) | 250W CW (@1GHz) |
| Dimension (inch) | 1.339*1.575*0.528 | 2.441*2.043*2.177 | 1.626*1.874*1.626 |

Higher Frequency available on Multi-Pole Multi-Throw, up to 18GHz
Power Handling capability of 4P5T Switch, up to 250W CW & 4Kw Peak @1GHz
Slim type 6P7T Switch, 2.409*1.417*2.216 (inch), also available.

■ Available Options

Internal Termination, Indicator Circuitry, Suppression Diode, TTL Logic,
Self De-Energizing Circuitry, Various I/O Connector type, Other Operating Voltage

■ 5 million life cycle SPDT switch is available now.



13131 East 166th Street, Cerritos, CA 90703-2202
1-800-8320-KMW • www.kmwinc.com
tel: 562-926-2033 • fax: 562-926-6133

KMW
RF & Microwave Products

ing some relation $E_V/E_H$ and phase $\theta$ between them, as shown in ***Figure 7***. As the wave propagates, the electric vector traces an ellipse around the axis of propagation having a maximum value $E_{max}$ and a minimum value $E_{min}$ one-quarter period later. The ellipse is inclined at a polarization angle $\psi$ to the vertical. When the sense of rotation of the electric vector is clockwise (viewed in the direction of propagation), the polarization is referred to as right-hand. It may be noted that the components $E_V$ and $E_H$ reach their maximum values at two points, which are not located on the same diameter of the ellipse; in this example they are approximately one-third of a period apart.

### The Polarization Ellipse

As an alternative to defining a wave by $E_V/E_H$ and $\theta$, an entirely equivalent description is obtained by specifying the polarization ellipse by its ellipticity — the ratio of major to minor axes — and the physical orientation of the major axis in space. The equations relating the two descriptions are set out in the textbooks and the conversion between them can be made graphically using a Carter chart.[4] The two representations of the polarization of a wave described previously are simply alternative descriptions of the same phenomenon. Any polarization can be described in terms of two superposed linear (H/V) components or two superposed circular (RH/LH) components, or by explicit reference to the ellipticity (axial ratio) and polarization angle.

### RECEIVING A SIGNAL WITH ARBITRARY POLARIZATION: ORTHOGONALITY

All that must be done to receive a linearly polarized signal is orient the receiving antenna so its polarization is aligned with that of the incoming wave. All of the energy in the wave (as defined by the Poynting vector) then will be received and nothing is wasted.

A CP signal is used in two ways. All the energy can be received using a CP antenna with the correct orientation. Alternatively, a randomly oriented linear antenna can be utilized and half the incident energy will be received. If a vertically polarized receiving antenna is placed in a horizontally polarized incident field nothing will be received. Similarly, a right-handed CP antenna placed in a left-hand CP field receives nothing (assuming in each case that the fields and antennas have pure polarization). The combinations of linear polarizations that are mutually at right angles in space (and left/right CP) are or-

*Fig. 7 The general case of elliptical polarization.*




*[Continued on page 92]*

Safe
RF
RADIATION
SYSTEMS
Worn on your belt like a beeper, the BADGE™ monitor provides audible and visual warnings when non-ionizing radiation in the 50 MHz to 40 GHz workplace exceeds alarm levels.
BE ON THE SAFE SIDE
200 kHz to 40 GHz
Be safe—Send for the BADGE™ today!
Send for our new brochure today!
From the people you trust...
GENERAL MICROWAVE
a herley company
General Microwave Corporation
425 Smith Street • Farmingdale, NY 11735-1198
TEL: 631-630-2000 • FAX: 631-630-2066
http://www.GeneralMicrowave.com

Synergy Microwave Corporation introduces a new line of Patent Pending I&Q Modulator/Demodulator with High Dynamic Range in a Miniature Package measuring 0.5 x 0.5 x 0.22 inch.

Being a passive device, it eliminates the need for external supporting circuitry, thus, simplifying the overall application design at reduced cost. These devices are specifically optimized for frequencies in the range of 800 to 2000 MHz.

**Miniature**
**Passive**
**Excellent Dynamic Range**
**Low Cost**

# modulator demodulator

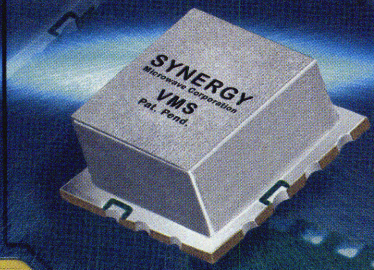




**VMS**
**Pat. Pnd.**

For additional information, contact our Sales and Application Team.

201 McLean Blvd., Paterson, NJ 07504
Tel: (973) 881-8800 Fax: (973) 881-8361
E-mail: sales@synergymwave.com
Web Site: www.synergymwave.com

SYNERGY®
MICROWAVE CORPORATION

CIRCLE 358 ON READER SERVICE CARD

thogonal, a mathematical term implying independence. Clearly, in the linearly polarized case this mathematical orthogonality is related to the spacial orthogonality of the two polarizations. In the CP example a spacial meaning of orthogonality is less obvious.

How is orthogonality defined in the general case of arbitrary elliptically polarized waves and antennas? A polarization-matched antenna can be designed using two crossed linearly polarized antennas such as dipoles feeding the two elements through an adjustable power divider and phase shifter. With the correct settings of the power divider and phase shifter, the polarization of any incoming wave can be matched exactly and all the power carried by it extracted; no power at all may be received by some other setting.[5,6]

When a signal is transmitted by one antenna and received by another, the ratio of the received signal to that which would be received by an antenna that is exactly polarization matched is given by the following equation in which all field components are complex quantities:

$$\frac{P}{P_{max}} = \frac{\left| E1_{+45}E2_{+45} + E1_{-45}E2_{-45} \right|}{\left(\sqrt{E1_{+45}E1^{*}_{+45} + E1_{-45}E1^{*}_{-45}}\right)\left(\sqrt{E2_{+45}E2^{*}_{+45} + E2_{-45}E2^{*}_{-45}}\right)} \quad (1)$$

where

$E1_{+45}$ = +45° field component from port 1
$E2_{+45}$ = +45° field component from port 2
$E1_{-45}$ = –45° field component from port 1
$E2_{-45}$ = –45° field component from port 2
$E^{*}$ = complex conjugate of E

This equation is essentially unchanged for any pair of orthogonal signal components whether H/V linear, ±45° linear or right/left CP. (For H/V, simply substitute $E_H$ for $E_{+45}$ and $E_V$ for $E_{-45}$; for CP, substitute $E_R$ for $E_{+45}$ and $E_L$ for $E_{-45}$.) In the special case in which the polarization of the receiving antenna is such that zero power is received, its polarization is said to be orthogonal to that of the incoming wave.

Care must be taken when referring to the polarizations radiated and received from any specific antenna. The sense of the polarization angle is reversed when the radiated wave is viewed from the position of the receiving antennas, so antennas transmit and receive signals with this sign change. Only in the special cases of vertical, horizontal and circular polarizations does this sign change not make a difference, so an antenna transmits and receives with the same polarization.

## APPLICATION TO MOBILE RADIO BASE STATION ANTENNAS

In the mobile radio base station environment the received signal is radiated by some (generally randomly oriented) linearly polarized antenna and scattered and reflected in transmission. The received signal has a time-varying polarization. Experiments have shown[7] that if the receiving antenna is arranged to respond to linear components of the field resolved in the ±45° planes, the two resulting signals will have sensibly equal mean amplitudes and a correlation that is low enough to provide useful diversity gain.

A measurement is required to show the quality of the polarization response of the receiving antenna. The antenna port labelled +45° must respond to the +45° field component and not (or at least substantially less) to the –45° field component. This independence must be maintained to a useful extent over the 120° azimuth sector covered by the antenna. The simplest test is to measure the response of the +45° antenna to the +45° component of the incoming wave and compare the result with its response to an incoming wave with –45° polarization. This measurement is effectively an XPD measurement in which the ±45° axes are fixed as the nominal polarization axes. It measures (correctly) the relative response of the antennas to two specific orthogonal field components but, especially off-axis, the ±45° test polarizations may not correspond to the matched polarizations of the antenna, so the result is less than the true orthogonality.




▲ *Fig. 8 A typical orthogonality measurement for a dual-polar base station antenna with a 65° azimuth 3 dB beamwidth.*

A more complex and rigorous measurement establishes the mathematical orthogonality of the responses of the two halves of the antenna using Equation 1. To obtain the data needed to calculate orthogonality at various bearings from the antenna, the relative phases and amplitudes of $E_{+45}$ and $E_{-45}$ must be measured for both ports of the antenna at various directions in space over the sector of coverage. This objective is most conveniently achieved using a near-field measurement system and the results are computed using a suitable spreadsheet. This method allows for the ellipticity of the polarization response of the antenna. In a typical dual-polar base station antenna, the elements for the two polarizations are generally mirror-symmetrical and have opposite orientation in their polarization responses. For this reason the numerical value of rigorously measured orthogonality is usually determined to be larger than the relative response measured by the simpler ±45° test.

***Figure 8*** shows a typical orthogonality measurement for a 65° sector antenna. The orthogonality exceeds 20 dB over much of the sector, falling to approximately 12 dB at ±60°. The two received polarizations fold slowly toward vertical polarization as the angle from boresight reaches 90° and the orthogonality tends toward zero.

## LESS ADEQUATE DEFINITIONS

Other definitions of polarization orthogonality have been encountered with correspondingly different results and methods of measurement. Some groups measure the angle between the major axes of the polarization ellipse characteristics of the two antennas. This technique is related to the simpler method previously described but is less direct and requires additional measurements to correctly

*[Continued on page 94]*

erlatone.com

www.w

ers | Combiners | Dividers | 90°/180° Hybrids

Directional Coupl



WERLATONE | SINCE 1965

Werlatone, Inc.
2095 Route 22
PO Box 47
Brewster, NY 10509
914.279.6187

define the resulting cross-polar coupling effects. Polarization orthogonality is a power ratio, not an angle. Definitions relating to the dot-product of simple time-invariant vectors are not correct because they do not account properly for the phase difference between the polarization components. The only complete expression is that shown in Equation 1 and equivalents derived from it in which the reference axes have been changed.

The discrimination of the receiving antenna to most other pairs of orthogonal polarizations will be less than that for the ±45° test polarizations described previously. For example, discrimination to orthogonal H and V signals is zero. (If the intention had been for the antenna to respond to and discriminate between H and V polarizations, its design would have been different.) The incoming real-world signal can be resolved into any chosen pair of orthogonal components, and it is the relative response of the receiving antenna to the best-resolved pair that is significant to system operation.

## CONCLUSION

The effects of imperfect polarization response of a dual-polar base station antenna typically cause a reduction in the diversity gain that could be achieved by a perfect antenna. In a typical environment the available diversity gain is reduced by 1 dB only as the orthogonality of the antennas falls below 10 dB. A full definition and measurement of polarization orthogonality requires measurements of four complex field components radiated/received by a typical ±45° base station antenna. Because of the relatively small effect of orthogonality on diversity gain, a simpler measurement of the relative response of a base station antenna to ±45° linearly polarized signals is usually adequate. ■


*State-of-the-art*

**Quality Crafted, Full Service — Cable Manufacturing**

A.) HCMC manufactures and stocks fully tested standard straight semi-rigid and flexible assemblies which can be hand formed. We also provide cable assemblies to customer specification.

B.) HCMC has design and engineering capabilities to produce custom delay lines to meet specific packaging and performance requirements.

C.) Utilizing our manufactured cable HCMC is providing miniature interconnect components to meet customer specified requirements for surface mount applications on printed circuits and microwave substrates.




**Haverhill Cable and Manufacturing Corp.**

HCMC

Semi-Rigid Coaxial Cable Specialists

**TEL (978) 372-6386 • FAX (978) 373-8024**

P. O. BOX 8222, Haverhill, MA 01835

www.haverhillcable.com


## References


1. B.S. Collins, "Polarization Diversity Antennas for Compact Base Stations," *Microwave Journal*, Vol. 43, No. 1, January 2000, pp. 76–88.
2. F.Y. Ling, "Matched Filter-bound for Time-discrete Multipath Rayleigh Fading Channels," *IEE Transactions Com.*, Vol. 43, No. 2/3/4, February/March/April 1995.
3. A.M.D. Turkmani, A.A. Arowojolu, P.A. Jefford and C.J. Kellett, "An Experimental Evaluation of the Performance of Two-branch Space Diversity Schemes at 1800 MHz," *IEEE Transactions Veh. Tech.*, Vol. VT-44, No. 2, May 1995, pp. 318–326.
4. R. Johnson (editor), *Antenna Engineering Handbook*, Third Edition, McGraw Hill Book Company, New York, 1991, pp. 23-1 to 23-10.
5. W. Sichak and S. Milazzo, "Antennas for Circular Polarization," *Proceedings of IRE*, Vol. 36, August 1948, pp. 997–1002.
6. L. Hatkin, "Elliptically Polarized Waves," *Proceedings of IRE*, Vol. 38, December 1950, p. 1455.
7. F. Adachi, M.T. Feeney, A.G. Williamson and J.D. Parsons, "Cross-correlation between the Envelopes of 900 MHz Signals Received at a Mobile Radio Base Station Site," *Proceedings of IEE*, Vol. 133, Pt. F, No. 6, October 1986, pp. 506–513.



**Brian Collins** *graduated from University College London in 1962 and has been the technical director of CSA Ltd. since 1978. His early work was on antenna systems for broadcast and military applications. During the last 10 years, he has been active in the mobile radio field where he has led the development of microstrip techniques for base station applications. Collins has been granted 12 UK patents for original contributions to antenna design. He can be reached via e-mail at briancollins@csauk.com.*

# The MPD Multi-Carrier Power Amplifier Solution. Creating A Whole New World Of Wireless Base Station Performance.








8 AMPS Carriers and 2 CDMA Carriers at 68 dBc IMD

Now you can have the best of both worlds. With MPD multi-carrier feed forward power amplifiers, you can add capacity and expand coverage – so you can handle traffic in the cities and go the distance in the suburbs.

The bottom line? Fewer dropped calls. Less churn. More revenue opportunities.

MPD power amplifiers are designed for just about any base station and they can be integrated seamlessly to easily upgrade your growing analog network to your growing digital network.

Thinking long-term? No problem. Just add digital carriers as needed. Even expand to 2.5G and 3G for the ultimate in flexibility.

Versatile MPD amplifiers can transmit multiple analog or digital signals simultaneously. And a single amplifier can produce 120 watts of output power. In addition, by combining multiple amplifiers you can achieve up to 400 watts.

For further information about increasing your capacity and coverage with high-performance MPD multi-carrier power amplifiers, call today.

CIRCLE 78 ON READER SERVICE CARD

**MPD TECHNOLOGIES, INC.** a subsidiary of Microwave Power Devices, Inc.

49 Wireless Boulevard, Hauppauge, NY 11788 • Phone: 516-231-1400 x452 • Fax: 516-434-1725 • E-mail: sales@mpd.com • Web site: www.mpd.com.
MPD is an EEO employer (M/F/D/V). For career opportunities, please visit our web site.





# RF CERAMIC CHIP CAPACITORS IN HIGH RF POWER APPLICATIONS

In today's world of wireless communications systems there are a myriad of high RF power applications that necessitate the use of high quality specialized ceramic chip capacitors. These demands require the designer to carefully account for factors such as device power dissipation and maximum current and voltage ratings as well as thermal resistance and temperature rise during normal circuit operation. This article highlights some of the most essential elements needed for selecting capacitor products suitable for these applications.

***"To ensure the highest level of reliability in high RF power design applications, factors such as maximum device power, maximum voltage and current ratings, thermal characteristics of all circuit devices and various ways that heat is removed should be taken into account before being incorporated into the end product design."***

## POWER DISSIPATION

In order to determine the device power dissipation of a ceramic capacitor operating in an RF power application the circuit designer must consider several critical factors. Among the most prominent are the equivalent series resistance (ESR) and maximum operating circuit current ($I_{max}$). The thermal resistance of the capacitor ($\theta_C$) as well as the thermal characteristics of the mounting surface are also key factors that should be taken into account while attempting to establish the power rating for a given capacitor. All of these areas are addressed in this article.

The actual power dissipated by a capacitor ($P_{CD}$) in an RF power application is readily determined by calculating the product of the rms circuit current squared ($I_C^2$) and ESR such that

$$P_{CD} = I_C^2 \bullet ESR$$

The ESR takes into account all of the losses incurred by the dielectric material, electrodes, terminations and termination to electrode interfaces. It is interesting to note that capacitors that exhibit ultra-low ESR as well as high voltage breakdown characteristics (such as porcelain types) are especially well suited for high RF power applications.

### A Capacitor Power Dissipation Example

Consider the following example consisting of a 51 pF RF porcelain chip coupling capacitor used in the power output stage of a cellu-

*[Continued on page 98]*

RICHARD FIORE
*American Technical Ceramics Corp. (ATC)*
*Huntington Station, NY*

# Get Your Hands On Some Serious Microwave Firepower.

Let's face it – technology waits for no one. Your alliance with strong microwave suppliers today will be critical to your success tomorrow. Through strategic acquisitions, and focused research and development, the Herley Microwave Products Group continues to meet the expanding requirements of large EW system integrators. But don't let our prominence in the defense/aerospace arena be misleading. We've proven ourselves in the global commercial marketplace too. Click on **www.herleympg.com** and learn more about our growing arsenal of components, MFAs, and subsystems.



HERLEY-MDI
A HERLEY INDUSTRIES COMPANY

GENERAL MICROWAVE
A HERLEY INDUSTRIES COMPANY

ROBINSON LABORATORIES, INC.
A HERLEY INDUSTRIES COMPANY

**HERLEY Microwave Products Group** www.herleympg.com




*Fig. 1 Current flow through a capacitor with series loss element.*

*Fig. 2 The relationship between current $I_C$, capacitance and frequency for an ATC series 100 case B capacitor.*




*Fig. 3 Voltage vs. dielectric thickness.*




lar base station operating at 900 MHz, as shown in ***Figure 1***. The RF power is 60 W in a 50 Ω system; the coupling capacitor has an ESR of 0.061 Ω at 900 MHz. The total RF current in this application is determined using

$$I_C = \sqrt{\frac{P}{Z}}$$

$$= \sqrt{\frac{60}{50}}$$

$$= 1.09\text{A}$$

Therefore, the total power dissipated in the capacitor is

$$P_{CD} = I_C^2 \bullet ESR$$

$$= (1.09)^2 \times (0.061)$$

$$= 0.072\text{ W (72 mW)}$$

This example illustrates the importance of the relationship between ESR and the total power dissipated by the capacitor. Here, the power dissipated by the capacitor due to its internal losses represents 72 mW or 0.12 percent of the total power applied to the capacitor. This low loss is achieved by utilizing low ESR RF ceramic capacitors in these applications. Recent advances in materials technology have enabled the realization of lower ESR, further reducing the power dissipated by the capacitor.

## CURRENT RATING

The maximum current rating assigned to a capacitor by the manufacturer is stated in one of two ways: voltage limited or power dissipation limited. The rating that applies depends on the capacitance value and operating frequency for a given application. If the capacitor's current rating ($I_C$) in a particular application is limited by voltage it can be calculated using the relationship between the rms voltage rating of the capacitor and the capacitive reactance. Accordingly, the maximum current for the voltage limited operating condition is directly proportional to the capacitor rms voltage rating and inversely proportional to its reactance:

$$I_{CV} = \frac{WVDC \bullet 0.701}{X_C}$$

where

$X_C = 1/2\pi fC$

Therefore, $I_{CV} = V_{rms} \bullet 2\pi fC$.

As the operating frequency or capacitance is increased, a region on the current curve is entered where the numerical value of the voltage limited current is equal to that of the current limited by power dissipation. This condition occurs at the intersection of the dotted and solid lines as shown in ***Figure 2***. At frequencies above this intersection point the current rating is determined solely by the power dissipation limit. In this region the maximum current is calculated using

$$I_{CP} = \sqrt{\frac{P_{d\,max}}{ESR}}$$

where

$P_{dmax}$ = maximum power dissipation of the device as defined in reference to a given mounting surface with known thermal characteristics

Hence, in this region the maximum current is now limited by the capacitor's power dissipation limit. Regardless of the specified power rating (a somewhat relative term), a capacitor exhibiting low ESR is always desirable for providing an optimum device current rating.

## VOLTAGE RATING

Maximum voltage ratings are determined predominantly by the dielectric strength or voltage breakdown characteristics of the dielectric material. As an example, porcelain dielectrics exhibit a breakdown voltage that typically exceeds 1000 V/mil of dielectric thickness and is virtually constant over the specified operating temperature range. Other dielectrics fabricated from barium titaniate ($BaTiO_3$)-based materials for example will exhibit lower breakdown voltage characteristics due to differences in their chemical and microstructural compositions, as shown in ***Figure 3***.

A voltage breakdown also may occur on the outside of the device package. In this instance, the applied voltage is large enough compared to the length of the external path (termination to termination) in air to produce a flashover. Other factors that may promote an external breakdown are surface contamination as well as environmental factors such as humidity and sharp edges, especially in the immediate areas of the terminations. One method of testing for dielectric strength is to submerse the test sample in an insulating oil bath, thereby eliminating the incidence of external flashover failure.

## THERMAL RESISTANCE

The thermal resistance of a ceramic capacitor operating in a given application is a key factor that must be known in order to establish the device power rating $P_{dmax}$. Knowing the length of the heat flow path, the thermal gradient and the perpendicular

*[Continued on page 100]*

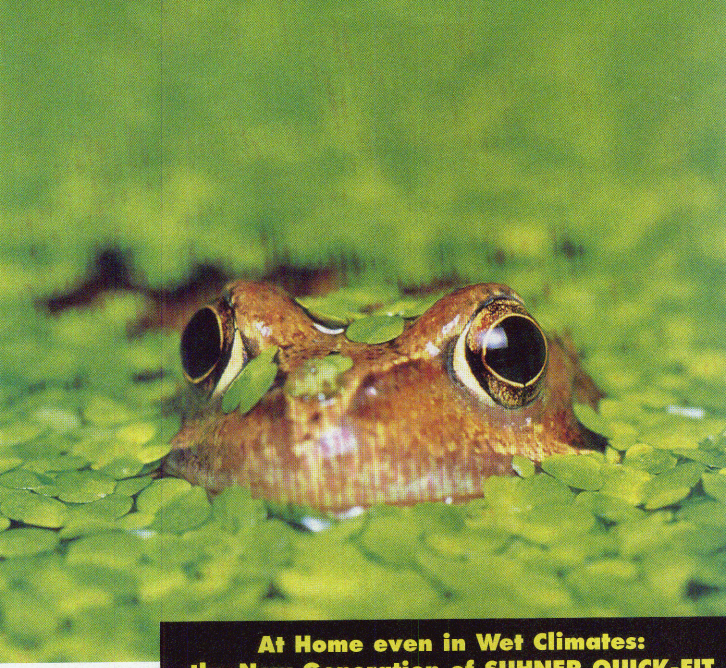

# At Home even in Wet Climates: the New Generation of SUHNER QUICK-FIT



**The new generation of SUHNER QUICK-FIT connectors: quick and easy assembly, absolutely watertight.**

- Absolutely watertight (IP 68) even under extreme conditions, thanks to our three-stage sealing concept
- Very easy, reliable and quick assembly
- Rugged mechanical design – stable electrical characteristics
- Excellent intermodulation performance, better than -155 dBc


HUBER+SUHNER

HUBER+SUHNER AG
RF Interconnection Division
9100 Herisau, Switzerland
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 44 44
www.hubersuhner.com



**AFFILIATED COMPANIES** (Phone-No): **Australia:** 0061 2 9905 0000; **América Latina:** 0055 12 323 4131; **Canada:** 00 613 271 9771; **China:** 00852 28 66 66 00; **Shanghai:** 0086 21 5298 5008; **France:** 0033 1 30 68 37 60, **Germany** 0049 89 6 12 01-0; **Singapore/Malaysia:** 0065 861 81 86; **Sweden:** 0046 8 447 5200; **United Kingdom:** 0044 1869 364 100, **USA:** 001 802 878 0555; **AGENTS: Austria:** Tonek-Electronics GmbH 0043 1 61003; **Belgium:** HUBER+SUHNEI 0032 2 735 51 61; **Denmark:** Crimp A/S 0045 48 100 500; **Finland:** Orbis Oy 00358 9 478 830; **India:** Rashmi Enterprise 0091 80 668 77 42; **Israel:** E.I.M. International Electronics ltd. 00972 3 921 30 01; **Italy:** AlHof di A. Hoffmann SRL 0039 0 261 62 500; **Japan:** Repic Corporation 0081 3 3918 5110; **Netherlands:** Sinoc Electronics B.V. 003 416 376 900; **New Zealand** INTELCOM SERVICES Ltd. 0064 4 801 6120; **Norway:** Bredengen AS. 0047 22 65 44 20; **Philippines:** New Globe Technologies Inc. 0063 2 812 3207; **South Africa:** Dartcom (Pty) ltd. 0027 11 907 9520; **Spain:** Kedialogar Internacional S.A 0034 91 413 91 11; **Taiwan:** King-Line Corporation 0088 62 2709 4520; **Turkey:** Elnox SA 0041 (0)24 466 54 61

area, as shown in ***Figure 4***, makes it possible to determine the thermal resistance θ.

The thermal resistance for a given capacitor structure with length L and cross-sectional area A can be expressed by the relationship

$$\theta = \frac{L}{4.186\lambda A} = \frac{0.2389L}{\lambda A}\left(\frac{^\circ C}{W}\right)$$

Thermal conductance λ is expressed as

$$\lambda = \frac{W}{(^\circ C)(cm)} = \frac{cal}{(^\circ C)(sec)(cm)}$$

where

λ = coefficient of thermal conductivity for the subject material
L = length of the thermal path (cm)
A = cross-section area perpendicular to the heat path ($cm^2$)

Note that multiplying [W/(°C)(cm)] by 0.2389 converts the units to cal/(°C)(sec)(cm). In addition, the thermal conductivity λ is essentially constant over the normal temperature range of 25° to 125°C.

From this expression it can be readily seen that the thermal resistance is proportional to the length of the heat flow path and inversely proportional to the thermal conductivity and the cross-sectional area perpendicular to the heat flow path. This relationship suggests that the aspect ratio of the capacitor, that is, the ratio between width and length, plays an important role in the determination of the thermal resistance. The power dissipation of the device can be determined from the thermal resistance

*Fig. 4 Heat flow path, thermal gradient and termination area of a ceramic capacitor.*




[Continued on page 102]

the FULL SPECTRUM



Select from the widest array of high-quality, high performance coaxial cables: Semi-Rigid, Conformable, Flexible Cables and Assemblies.

Certified High-Quality

Coaxial Cables SEMI-RIGID

- Copper, aluminum, stainless steel
- Impedances 10 to 100 ohms
- Diameters 0.020" to 0.500"
- Military qualified

NOW FEATURING Coaxi-Form Cables & Cable Assemblies

Coaxi-Form Coax, a hand-formable cable sweep tested to 20 GHz, is an alternative for semi-rigid coaxial cable.



To learn more, call us or visit our website.

PRECISION TUBE

COAXITUBE DIVISION

A Mueller Industries Company

620 Naylor Mill Rd., Salisbury, MD 21801
Tel: (410) 546-3911 • Fax: (410) 546-3913
www.precisiontube.com • coaxsale@voicenet.com



CIRCLE 126 ON READER SERVICE CARD

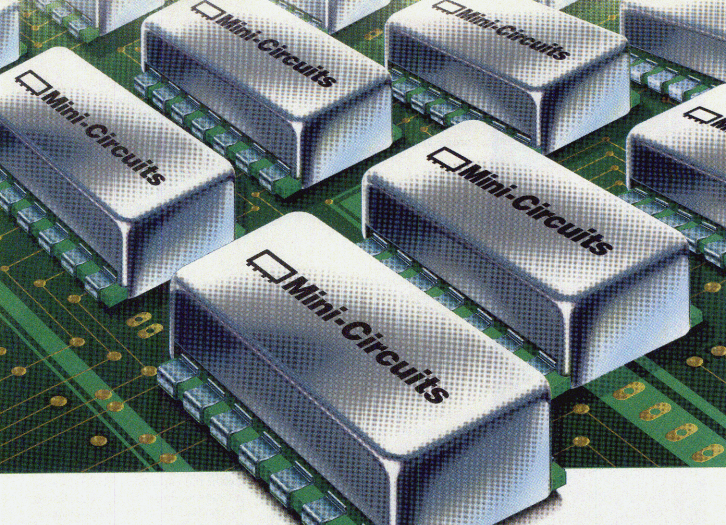


## 12.5 to 3000MHz

# SURFACE MOUNT VCO's from $13.95

Time after time, you'll find Mini-Circuits surface mount voltage controlled oscillators the tough, reliable, high performance solution for your wireless designs. JTOS broadband models span 12.5 to 3000MHz with linear tuning characteristics, low -120dBc/Hz phase noise (typ. at 100kHz offset), and excellent -25dBc (typ) harmonic suppression. JCOS low noise models typically exhibit -132dBc/Hz phase noise at 100kHz offset, and phase noise for all models is characterized up to 1MHz offset. Miniature J leaded surface mount packages occupy minimum board space, while tape and reel availability for high speed production can rocket your design from manufacturing to market with lightning speed. Soar to new heights...specify Mini-Circuits surface mount VCO's.




*Mini-Circuits...we're redefining what VALUE is all about!*

JTOS/JCOS SPECIFICATIONS

| Model | Freq. Range (MHz) | Phase Noise (dBc/Hz) SSB@ 10kHzTyp. | Harmonics (dBc) Typ. | $V_{tune}$ 1V to: | Current (mA) @+12V DC Max. | Price $ea. (5-49)* |
|---|---|---|---|---|---|---|
| JTOS-25 | 12.5-25 | -115 | -25 | 11V | 20 | 16.95 |
| JTOS-50 | 25-47 | -108 | -19 | 16V | 20 | 13.95 |
| JTOS-75 | 37.5-75 | -110 | -27 | 16V | 20 | 13.95 |
| JTOS-100 | 50-100 | -108 | -35 | 16V | 18 | 13.95 |
| JTOS-150 | 75-150 | -106 | -23 | 16V | 20 | 13.95 |
| JTOS-200 | 100-200 | -105 | -25 | 16V | 20 | 13.95 |
| JTOS-300 | 150-300 | -102 | -28 | 16V | 20 | 15.95 |
| JTOS-400 | 200-380 | -102 | -25 | 16V | 20 | 15.95 |
| JTOS-535 | 300-525 | -97 | -26 | 16V | 20 | 15.95 |
| JTOS-765 | 465-765 | -88 | -30 | 16V | 20 | 16.95 |
| JTOS-1000W | 500-1000 | -94 | -26 | 18V | 25 | 21.95 |
| JTOS-1025 | 695-1025 | -94 | -26 | 16V | 22 | 18.95 |
| JTOS-1300 | 900-1300 | -95 | -26 | 20V | 30 | 18.95 |
| JTOS-1550 | 1150-1550 | -101 | -20 | --- | 30 | 19.95 |
| JTOS-1650 | 1200-1650 | -95 | -20 | 12V | 30 | 19.95 |
| JTOS-1750 | 1350-1750 | -101 | -16 | 12V | 30 | 19.95 |
| JTOS-1910 | 1625-1910 | -91 | -23 | 12V | 20 | 19.95 |
| JTOS-1950 | 1550-1950 | -103 | -14 | --- | 30 | 19.95 |
| JTOS-2000 | 1370-2000 | -95 | -17 | 22V | 30 (@8V) | 19.95 |
| JTOS-3000 | 2300-3000 | -90 | -22 | --- | 25 (@5V) | 20.95 |
| JCOS-820WLN | 780-990 | -112 | -13 | --- | 25 (@6V) | 49.95 |
| JCOS-820BLN | 867-932 | -112 | -24 | 14V | 25 (@10V) | 49.95 |
| JCOS-1100LN | 1079-1114 | -110 | -12 | --- | 25 (@8V) | 49.95 |

Notes: *Prices for JCOS models are for 1 to 9 quantity. **Required to cover frequency range. ***Tuning Voltage for JTOS-3000 is 0.5 to 12V, JTOS-1550, JTOS-1750, and JTOS-1950 is 0.5 to 20V, and JCOS-820WLN and JCOS-1100LN is 0 to 20V. For additional spec information and details about 5V tuning models available, consult RF/IF Designer's Guide, our Internet Site, or call Mini-Circuits.

***DESIGNER'S KITS AVAILABLE***
K-JTOS1 $149.95 (Contains 1ea. all JTOS models except JTOS-25, -1900W, -1300 to -3000).
K-JTOS2 $99.95 (Contains 1ea. JTOS-50, -100, -200, -400, -535, -765, -1025).
K-JTOS3 $114.95 (Contains 2ea. JTOS-1300, -1650, -1910).

Mini-Circuits®

US 96 INT'L 97
CIRCLE READER SERVICE CARD

P.O.Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

*The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: http://www.minicircuits.com*

MICROWAVE TECHNOLOGY REACHING INTO THE NEXT MILLENNIUM



MCN/MPC
YOUR ONE SOURCE FOR MICROWAVE CIRCUITS

For Fine Line Etching with tolerances to .0003", Complex Plating/ Machining, Laser Cutting, Multilayer/Hybrids, or Metal-backed Boards including Plated thru Holes - Modular Components National/ Maryland MPC is your one source for Microwave Circuit Boards.

MODULAR COMPONENTS NATIONAL, INC.
2302 Industry Court, PO Box 453,
Forest Hill, MD 21050
410/879-6553 Fax: 410/838-7629
E-mail: sales@mcn-mmpc.com
http://www.mcn-mmpc.com

MARYLAND MPC LLC
81 Old Ferry Road, Lowell, MA 01854
978/452-9061 Fax: 978/441-0004
E-mail: sales@mcn-mmpc.com
http://www.mcn-mmpc.com



expression by establishing the temperature differential across the heat flow path and dividing by θ. Hence, the maximum power dissipation is expressed as

$$P_d = \frac{T2 - T1}{\theta_C} = \frac{\Delta T}{\theta} \text{ (W)}$$

where

$P_d$ = power dissipated at area A (W)
T2 = temperature of cross-section area A (perpendicular to heat flow) (°C)
T1 = temperature at a cross-section area at a distance L from area A (°C)
L = length of path between areas (cm)
$\theta_C$ = thermal resistance of path across capacitor length L (°C/W)

The thermal model used for calculating the maximum power dissipation of a ceramic capacitor typically takes into account the thermal resistance of the capacitor and its mounting surface. This model assumes that heat is removed mainly by conduction through the capacitor's terminations and external leads. Since heat removal by radiation and convection is disregarded in this model, a safety factor for maximum power dissipation therefore is established. The model further assumes that the thermal resistance of the capacitor's terminations is insignificant compared to the ceramic body and, hence, is disregarded. The effects of the mounting surface also are disregarded and an infinite heat sink is assumed for the temperature rise calculation shown in ***Figure 5***.

## TEMPERATURE RISE

The maximum change in temperature along the heat flow axis is referred to as the temperature rise or thermal gradient. The hypothetical determination of temperature rise as a function of RF current is not always straightforward. To get a reasonable handle on this value the designer must account for the ESR and thermal resistance of the capacitor as well as its mounting surface.

Given the ESR and current in an application, the capacitor's power dissipation $P_{CD}$ as well as the heat generated in the capacitor can be calculated. The thermal resistance of the capacitor and its external connections to a heat sink also can be ascertained and, hence, the temperature rise above the ambient can be established. Assuming an infinite heat sink and a capacitor with zero manufacturing flaws, the temperature rise can be calculated using

$$\Delta T = T1 - T2 = \theta\,(I_C^2 \bullet ESR) = \theta \bullet P_{CD}\ (°C)$$

***Figure 6*** shows the relationship between the capacitor's power dissipation and the change in the capacitor's case temperature.

## HEAT TRANSFER METHODS

Heat may transfer either to or from the boundaries of a ceramic capacitor structure in several ways. Heat transfer occurs only when a temperature difference exists between the capacitor and its immediate surroundings. Heat is transferred by conduction, convection and radiation, which may occur separately or in combination.




▲ *Fig. 5 The thermal model of a capacitor mounted on a heat sink.*




▲ *Fig. 6 $P_{CD}$ as a function of temperature.*

*[Continued on page 104]*

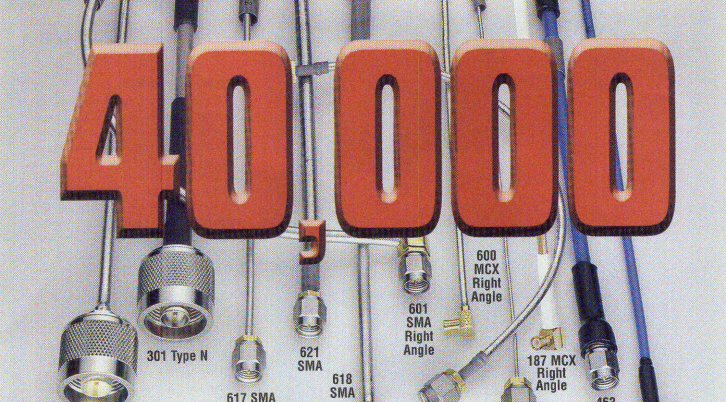


## Cable Assemblies now in stock at Richardson Electronics

lite low skew cable fibre channel coax cable microwave coax coax Q-flex coax semi-rigid twisted pair c
ro miniature custom cable 2mm ha assemblies fpd assemblies cable a
ohm and 75 ohm RF and microwave obes 2mm HM 2mm HDM de
le assemblies (dc to 40 ghz) cable coax ultrasound probes semi-f
nectors - sma smb smc mcx mmcx bnc bnc type f type n 7/16 sma smb 3.5mm 7mm 2.4mm type n type

# Tensolite

**In stock, fully specified cable assemblies with selected lengths and connector combinations.**

| | | Cable Code | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Flexible Low Loss 301 | Semi-Flex 600 | Semi-Flex Plus 620 | Semi-Flex II 617 | Semi-Flex 601 | Semi-Flex Plus 621 | Semi-Flex II 618 | Q-Flex 461 | Q-Flex 463 | Semi-Flex 604 | RG316 187 |
| | | .195 | .086 | .115 | .086 | .141 | .180 | .141 | .110 | .170 | .047 | .102 |
| Connectors | MCX Straight | | ✓ | | | | | | | | ✓ | ✓ |
| | MCX Right Angle | | ✓ | | | | | | | | ✓ | ✓ |
| | SMA | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SMA Right Angle | | ✓ | | | ✓ | | | | | ✓ | |
| | Type N | ✓ | | | | ✓ | | | | | | |

Data sheets available at **www.qmiinc.com**



MADE IN THE USA

Tensolite

QMI Microwave Interconnects

A CAMBLE Company

**1-800-362-FLEX**

301 Ballardvale St. Wilmington, MA 01887
FAX: (978) 988-9393 www.qmiinc.com Email: sales@qmiinc.com

"Do it Yourself" - call QMI for cable and connector price and availability. Selected options and lengths in stock for immediate delivery from QMI's Worldwide Distributor:

Richardson Electronics
Engineered Solutions
1-800-RF-POWER

CIRCLE 128 ON READER SERVICE CARD

Stealth Microwave™
The Linearized Amplifier Specialists

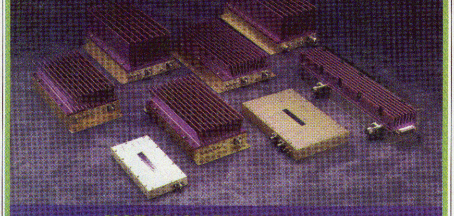

NOT ENOUGH CAPACITY ?
NEED MORE HEADROOM ?
NEED MULTICARRIER AMPLIFIERS ?
VISIT
www.ssbtech.com
For CDMA, TDMA, GSM applications, from 500 MHz to 14 GHz

Stealth Microwave™ is a division of SSB Technologies, Inc.
1007 Whitehead Road Ext., Trenton, NJ 08638
TEL: 1-888-SSB-7791 ▪ 609-538-8586 ▪ Fax: 609-538-8587
email: sales@ssbtech.com

CIRCLE 155 ON READER SERVICE CARD

First-class performance at coach-class prices.

Bias Passing Attenuators




| Model | Frequency | Impedance |
|---|---|---|
| 9093-N | 500 MHz - 2 GHz | 50Ω |
| 9093-SMA | 500 MHz - 2 GHz | 50Ω |
| 9093-TNC | 500 MHz - 2 GHz | 50Ω |
| 9093-F | 500 MHz - 2 GHz | 75Ω |

Inmet's DC bias passing attenuators attenuate RF signals and pass DC voltage and current. The maximum DC voltage is 100 volts and DC current is rated at 2 amps maximum. Units handle up to 2 watts average RF power. Several attenuation values are available up to 20dB.

25 YEARS GOOD INMET CORP.
inmet CORPORATION
An MCE Company

Manufacturer of Attenuators • Adapters • DC Blocks • Equalizers • Terminations
300 Dino Drive • Ann Arbor, MI 48103 USA • Phone 888-244-6638 or 734-426-5553 • FAX 734-426-5557
Visit us on the Web at www.inmetcorp.com

CIRCLE 57 ON READER SERVICE CARD



### Thermal Conduction

Heat energy transferred by conduction takes place in ceramic capacitor structures essentially at the termination areas. In this case, heat transfer takes place because there is physical contact between the capacitor terminations and the points of connection on the board surface. Energy transfer by conduction occurs in the direction of decreasing temperature and is due to the temperature gradient along the length of the heat flow path.

On the molecular level, conduction can be thought of as the transfer of energy from a more energetic thermal state to a less energetic thermal state. Therefore, as molecules collide with each other energy is transferred in the form of heat from the more energetic to the less energetic molecules. This heat transfer is due to the random movement of molecules and the interactions between them within the two thermal gradients. As the temperature increases, the activity or interaction between the molecules also increases. These molecules collide with each other and, hence, transfer energy in the form of heat.

From Fourier's law of heat conduction the conduction process can be quantified as a heat flux rate equation. The law states that the rate of heat flow through a solid homogeneous structure is directly proportional to the area of a section at right angles to the direction of heat flow path and to temperature differences per unit length along the path of heat flow, as shown in ***Figure 7***. Thus,

$$\frac{dQ}{dt} = -\frac{\lambda A dT}{dx}$$




▲ *Fig. 7 Heat flow through a solid homogeneous structure.*

*[Continued on page 106]*

# It's Time To Hang Up Your Old Technology.

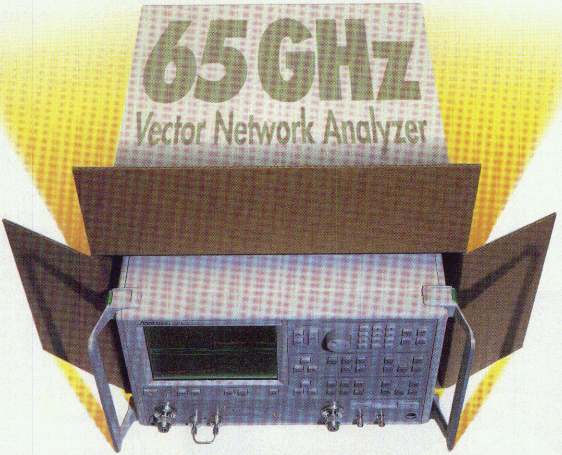


Introducing the millimeter wave Vector Network Analyzer designed to take you into the 21st century: the Lightning™ 65 GHz VNA from Anritsu. Unlike those large, low-performance mmW dinosaurs of the past, the Lightning 65 GHz features a sleek bench-top design. High, fully-leveled, output power and a wide dynamic range. And, of course, the Lightning family's proven track record for speed, accuracy and ease of use.

The new 65 GHz Lightning VNA also brings uncompromising performance to your millimeter wave measurements. With four sampler architecture and a four-channel color LCD display. Built-in hard and floppy drives. Gain compression software suites and an industry standard V-type coaxial connector, specified beyond 65 GHz.

Continuing the Lightning family's heritage for long-term reliability, the 65 GHz VNA also boasts Anritsu's unprecedented technical support. Featuring flexible on-site programs and complete upgrade plans.

To discover our entire line of newer, faster, leaner and meaner VNAs, call 1-800-ANRITSU or check out our website at www.global.anritsu.com.

Linking the World

Anritsu

**Lightning 65 GHz Vector Network Analyzer**

©1999 Anritsu Company Sales Offices: United States and Canada, 1-800-ANRITSU, Europe 44(01582)433200, Japan 81(03)3446-1111, Asia-Pacific 65-2822400, South America 55(21)527-6922, http://www.anritsu.com

**One world. One name. Anritsu.**

CIRCLE 17 ON READER SERVICE CARD

where

$dQ/dt$ = rate of heat flow per unit time
$A$ = cross-sectional area at right angle to the direction of heat flow path
$dT/dx$ = temperature gradient per unit length along heat flow path
$\lambda$ = thermal conductivity of the material

Note that the negative sign associated with $\lambda$ indicates that the heat flows conductively from high to low temperatures, or against the temperature gradient.

### Thermal Convection

Energy transfer between a solid surface and moving air in the immediate surroundings is commonly referred to as convection. The heat transfer due to convection is an interactive combination of diffusion or molecular motion in the dielectric material and the bulk movement of the surrounding air. There are basically two types of convection heat transfers: natural (free) and forced. Natural convection currents are induced by forces due to differences in variations between the device surface temperature and the surrounding ambient temperature; that is, heat is directly picked up by the air and transported away. Natural or free convection is caused by air movement due to thermal gradients between an object (in this case a ceramic capacitor) and its surrounding ambient environment.

Forced convection heat flow is induced by external means, such as a cooling fan. Heat transfer coefficients due to forced flow are generally greater than that of natural convection flow. In most cases the free convection may be neglected when there is forced airflow, hence forced convection provides the greater effect for convection cooling.

Newton's law of cooling is used to model the temperature change of an object that is at some initial elevated temperature placed in an environment of a lower temperature. The law states that the rate at which a warm body cools is approximately proportional to the temperature difference between the temperature of the warm object and the temperature of its immediate surroundings. Thus,

$$\frac{dT}{dt} = k(T - T_A)$$

where

$T$ = temperature of the object at time t
$T_A$ = temperature of the surrounding environment (ambient temperature)
$k$ = constant of proportionality
$t$ = time variable (s)

Solving the differential equation for T means placing T on one side and t on the other, such that

$$\frac{dT}{T - T_A} = k\,dt$$

Integrating both sides produces

$$\ln(T - T_A) = kt + C$$

and solving for T gives

$$T = e^{kt+C} + T_A$$

From this expression it can be seen that the cooling process is exponential, that is, rapid at first, then levels off. Hence, this characteristic may be thought of as the thermal time constant of an object. The temperature of the object T now can be directly expressed at time t (s). In Newton's law of cooling, t is the variable where $T_A$, k and C are constants. In order to determine the temperature of the object at a given time, all of the constants must have numerical values.

### Thermal Radiation

Thermal radiation is energy emitted by matter and transported by electromagnetic waves or photons. While the transfer of energy by convection or conduction requires the presence of a medium, electromagnetic waves do not require a medium to propagate and will transfer heat energy most efficiently in a vacuum. The total energy at which radiation may be emitted from a surface as photons per second by a square centimeter of an ideal black body radiator is equal to the temperature raised to the fourth power. This energy emission results from changes in the electron configurations of the atoms or molecules of the radiating object.

Stefan-Boltzmann's law gives the maximum heat flux at which radiation may be emitted from a surface. The

[Continued on page 108]

-165 dBc/Hz NOISE FLOOR
CRYSTAL OSCILLATOR!
40-120 MHz
Po +13dBm
0.5 cu. in.
CALL US!
Model XO2000
• Frequency Stability: ± 5 ppm over 0° to +50°C
• Supply Voltage: +12 VDC
• Aging: 1 ppm/year
• Phase Noise:
10 Hz - 85 dBc/Hz
100 Hz -122 dBc/Hz
1 KHz -152 dBc/Hz
10 KHz -165 dBc/Hz
100 KHz -165 dBc/Hz
• Size: 1.0" X 1.0" X 0.5" high
• VCXO version available
TCI
THE SOURCE SOURCE
Techtrol Cyclonetics Inc.
815 Market Street
New Cumberland, PA 17070
TEL: 717-774-2748 • FAX: 717-774-6799
e-mail: techtrol@paonline.com
Website: www.tci-ant.com

Application Profile

# How to make Cell Phones Smaller and Lighter? BGA with Integrated Components using DuPont Green Tape™.



National Semiconductor continues to lead the telecommunications industry in applying LTCC advantages to integrated wireless modules. National's latest designs have combined DuPont's line of Fodel® compositions, Green Tape™ and thick film conductor materials with National's LTCC manufacturing expertise to achieve smaller designs with enhanced performance at lower cost. These designs include high-density interconnect capability, integration of passive components, and passive functions with low-loss/high-stability performance.

## Challenge: To Increase Functionality and Improve Performance for Wireless Devices while Decreasing Size and Cost.

Integration of more embedded components in less space at lower cost is the driving model for success in portable wireless applications. Using fine line LTCC technology, National is meeting the need for the precision embedded components (inductors, filters, capacitors and resistors) required to fabricate advanced LTCC modules.

## Solution: Fodel® Conductor Embedded in Green Tape™ LTCC allows for a Complete System on a Module.

National's latest LTCC foundry technology offers support of design layouts of less than 2 mil lines and spaces. This affords the designer the opportunity to compress and embed more functionality in less space with improved predictability. Flip chip silicon and surface mount components can be co-designed into the module system. Line definition and process control are significantly improved over traditional thick film printing technology. This results in improved performance in the areas of higher-yielding DC interconnect; improved Q on edge-coupled, edge-sensitive structures; and more consistent electromagnetic results in RF structures. National offers a complete LTCC foundry service including fast-turn prototypes, high-volume LTCC substrate manufacturing, and assembly and test services supporting the full line of DuPont Green Tape™ products.

**National: Doing what we do best — prototype turns in 7 days; state-of-the-art technology; low-cost/high-volume manufacturing.**

**For more information, call National at (949) 380-2054 or visit the National LTCC website at http://www.national.com/ltcc.**

National Semiconductor®

DUPONT®

GREEN TAPE™ FODEL® BIROX® DIFFUSION PATTERNING™ LUXPRINT®

CIRCLE 30 ON READER SERVICE CARD




▲ *Fig. 8 Thermal radiation dispersion.*

law takes the form

$$E = \sigma T^4$$

where

T = temperature
σ = a constant

From this equation it can be seen that a small increase in temperature produces a very large increase in emitted radiation energy. If the temperature is doubled, the energy emitted increases by a factor of 16. The surface emissivity indicates how efficiently the surface of a given object will emit radiation energy relative to an ideal black body radiator. The ideal black body has an emissivity reference equal to 1.0. Just as surfaces emit energy, another surface can absorb a portion of that energy. The surface properties of various materials will affect the amount of heat radiated.

The intensity of radiation is defined as the rate of emitted energy per unit of surface area through a unit solid angle. The radiation from a surface has different intensities in different directions. The intensity of radiation along the normal to the surface is known as the intensity of normal radiation.

When thermal radiation strikes a solid object, portions of the energy can be absorbed, reflected or transmitted through the object. This energy is dispersed in various proportions depending on the surface emissivity and density of the material, as shown in ***Figure 8***. The portion of the incident radiation that is absorbed by the object is its absorptivity α. Another portion of the incident radiation energy will be reflected and is referred to as reflectivity ρ. Lastly, the portion of the radiated energy that is transmitted though the object is referred to as transmissivity τ. The sum of all of these portions of the radiated energy is unity and, therefore,

$$\alpha + \rho + \tau = 1$$

## APPLICATION CONSIDERATIONS

This article has highlighted several major factors to consider while designing circuit elements for high RF power applications. Some of the most important considerations relate directly to such things as ESR, thermal resistance of the device(s), mounting surface characteristics and heat removal. These factors are associated with the overall thermal management of the entire design and should necessitate careful assessment of all circuit elements and their contribution to the overall thermal load on the design. Some of the guidelines for these considerations are summarized below.

- It is always prudent to select capacitor products with ultra-low ESR and dissipation factor characteristics, especially concerning thermal

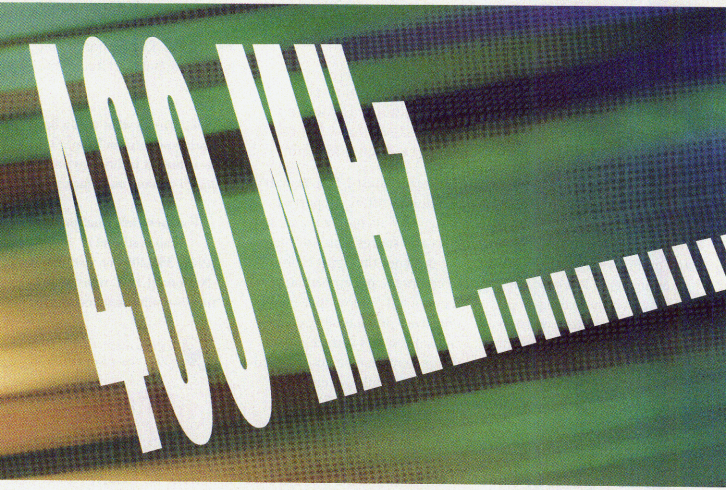

management considerations of high RF power designs. This choice will ensure the most efficient operation and minimize the amount of heat generated in the application.

- The thermal resistance of the capacitor's mounting surface and heat sink should be as low as possible. Since the heat is primarily conducted by the capacitor's terminations to the metallic contact points on the board, it is important to evaluate characteristics such as thermal conductivity of all materials involved as well as board trace dimensions and material thickness at the points of contact.
- Since the greater part of the heat transfer is predominantly through the terminations of the capacitor, the thermal path of a ceramic chip capacitor may be further improved by the use of external leads such as silver microstrip ribbon. The ribbon leads will serve to bleed heat away from the capacitor more efficiently. The leads also may serve as a mechanical strain relief, especially in situations where the coefficient of thermal expansion between the capacitor and the board material is significantly mismatched. The silver lead stock is tailored to the width of the capacitor body, making it suitable for this purpose.
- The overall thermal management of the entire design must be judiciously evaluated. Devices such as power FETs and active gain blocks as well as other passives in an application will provide additional sources of heat during operation and thereby add to the overall thermal load of the design module. Care must be taken to account for the impact of all of the heat sources in the final design.
- Using capacitor assemblies that employ several capacitors in parallel will serve to greatly extend the current and power rating over a single capacitor. Assemblies that utilize ruggedized porcelain capacitor building blocks in various combinations will greatly extend the capacitance, voltage and current handling capabilities. For example, two equal value capacitors in parallel will yield approximately one-half the ESR of one capacitor and thereby afford virtually twice the current handling capability, an advantage that is difficult to ignore.

## CONCLUSION

To ensure the highest level of reliability in high RF power design applications, factors such as maximum device power, maximum voltage and current ratings, thermal characteristics of all circuit devices and various ways that heat is removed should be taken into account before being incorporated into the end product design. In addition, when selecting ceramic chip capacitors for these applications it is prudent to first evaluate the ESR of the particular capacitor(s) at the application operating frequency. Knowing the ESR along with the network impedance will allow the designer to perform quick calculations of the power dissipated by the capacitor. This consideration is equally important for all other circuit elements in the application. Proper design with emphasis on thermal management will help to ensure efficient and trouble-free operation. ■




# A DIGITALLY COMPENSATED TCXO WITH LOW PHASE NOISE CHARACTERISTICS

*The phase noise level of a digitally compensated temperature-compensated crystal oscillator (DTCXO) is strongly degraded due to the numerical system of compensation. The requirements of high stability, low power consumption and low phase noise for these oscillators have increased during the last couple of years. This article explains which parameters must be taken into account and the methods required to reduce the noise induced by the quartz crystal design, layout, component choices and electrical configuration. The aim of this analysis is to provide a new high performance oscillator for satellite communications (SATCOM) applications and low phase noise instrumentation equipment and to demonstrate that digitally compensated technology can be utilized to produce potentially cheaper high performance oscillators compared to built-in application-specific ICs.*

The growing demand for portable applications and high performance oscillators such as in telecommunications or SATCOM applications leads to the design of DTCXOs with a very low phase noise that can replace oven-controlled crystal oscillators based on cost/consumption criteria. The main parameters are frequency stability and phase noise over the temperature range and aging.

The compensation of a TCXO can be either analog or digital. A DTCXO is an interesting compromise between stability, power consumption and low labor cost. The analog TCXO offers lower performance in terms of frequency stability over temperature range. The main feature of a TCXO is better phase noise when compared to the DTCXO, especially near the carrier and up to 10 kHz offset. The phase noise degradation of a standard DTCXO is mainly due to the digital compensation. ***Figures 1*** and ***2*** show the phase noise levels of both types of oscillators.

In order to achieve these noise performance goals, the different noise sources must be considered.[1] The various types of phase

*Fig. 1 Phase noise of an SMD TCXO.*







*Fig. 2 Phase noise of a standard DTCXO.*

*(Continued on page 113)*

ERIC JACQUET, JEAN-PIERRE BARDON AND OLIVIER BIGNON
*Temex Components*
*Pont Sainte Marie, France*

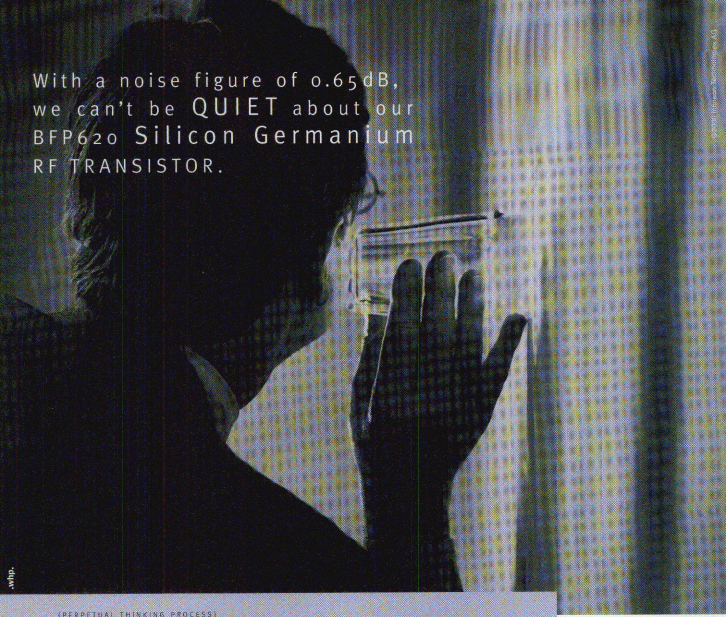

# With a noise figure of 0.65dB, we can't be QUIET about our BFP620 Silicon Germanium RF TRANSISTOR.

(PERPETUAL THINKING PROCESS)

INFINEON CYCLE

1970:
1st silicon RF transistor up to 1 GHz

1975:
1st SMT package from Siemens Semiconductors

1994:
SIEGET 25 = breakthrough in RF performance

1.4.99:
Siemens Semiconductors becomes Infineon Technologies

Today:
BFP620 RF transistor in Silicon Germanium technology hits the market with the lowest noise figure available

**BFP620 electrical characteristics @ 1.8 GHz; 2 V:**

| | |
|---|---|
| Noise Figure | 0.65 dB |
| Power Gain | 21 dB |
| Input IP3 capability (Ic = 6 mA) | 10 dBm |
| Ic max | 80 mA |
| $V_{CEO}$ | 2.8 V |

Quiet! The BFP620, Infineon's first Silicon Germanium RF transistor, features a Noise Figure of just 0.65 dB at 1.8 GHz – unique for bipolar transistors. Our latest innovation, assembled in a standard SOT-343 SMT package, delivers high linearity and high gain along with low power consumption. The BFP620 provides outstanding performance and cost advantages for a wide range of wireless applications: cellular and cordless phones to pagers and much more. Visit us at:

www.infineon.com/SiGe

Infineon technologies

Never stop thinking.



# ADVANTEST RACES BEYOND STATE-OF-THE-ART!

Advantest is one of the world's leading suppliers of wireless telecommunications measuring equipment. We make everything from spectrum and network analyzers to a wide range of other measurement instruments — including amplifiers and filters. We are constantly racing beyond state-of-the-art. Our latest spectrum analyzers, for example, can measure your wireless systems in conformance with third generation mobile telecommunications standards like IMT-2000. Which means they can also test leading-edge W-CDMA channels. And everything we make is supported worldwide through our own service network as well as through our partners Rohde & Schwarz in Europe and Tektronix in the U.S. If you supply wireless telecommunications systems, you need the best precision measuring equipment you can get. You'll find it at Advantest!



*R3267 Spectrum Analyzer*

***For IMT-2000 !***

The R3267 is a high performance spectrum analyzer designed to meet the needs of the new communication technologies like 3rd generation mobile (IMT-2000), microwave digital broadcast, high-speed multimedia mobile access (MMAC), and satellite-based services. It features a frequency span accuracy within ±1% and a dynamic range of -154dBc/Hz (typ.) in the 2GHz band.

noise associated with a low noise oscillator are shown in ***Figure 3***. The oscillator's resonator is the primary noise source close to the carrier; the oscillator circuitry is the primary source far away from the carrier. Frequency multiplication by N increases the phase noise by $N^2$ (20logN in decibels). In addition, vibration-induced noise can dominate all other sources of noise in many applications.

The oscillator's loaded Q affects noise when the oscillator circuitry is a significant noise source. The noise floor is limited by Johnson noise, that is, noise power kT = –174 dBm/Hz at 290 K. A higher signal level improves the noise floor but not the close-in noise. Thus, in this article, two ways to improve the performance of DTCXOs will be investigated. The target specifications are a frequency stability of ±0.2 ppm over –30° to +75°C, 1.5 ppm aging over 10 years and a noise floor phase noise of –150 dBc/Hz and –105 dBc/Hz at 10 Hz offset.

## CRITICAL ELEMENTS FOR NOISE GENERATION DUE TO THE QUARTZ RESONATOR

The theoretical phase noise parameters are

$$\frac{f_0}{2Q} = f$$

and

$$Q = \frac{f_0}{\Delta f}$$

where

$\Delta f$ = bandwidth at –3 dB points
Q = quality factor of the resonator

Slopes of –30 dB/decade at –105 dBc/Hz for 10 kHz offset and –20 dB/decade at –145 dBc/Hz for 1 kHz offset are typical. The intersection of the two lines dictates a resonator bandwidth of 200 Hz. In a numerical example,

$$Q = \frac{20}{200}10^6 = 10^5$$

$$\Rightarrow Q = 100,000$$




▲ *Fig. 3 Types of phase noise.*

The resonator Q is a critical factor and the optimization will be based on a Q >> 100 K.

The various possibilities of a quartz resonator design are listed in ***Table 1***. A third-overtone AT-cut crystal is chosen based on good aging and oscillator stability. The oscillator has been designed

**TABLE I**

**QUARTZ RESONATOR DESIGN COMPARISON**

| Main Parameters | AT Fundamental 10 MHz | AT Third Overtone 10 MHz | AT Fundamental 20 MHz | AT Third Overtone 20 MHz |
|---|---|---|---|---|
| Q (average value) | 150,000 to 200,000 | 350,000 to 500,000 | 75,000 to 100,000 | 175,000 to 250,000 |
| Oscillator stability | medium | good | low | good |
| Tendancy for external pulling (±5 ppm) | good | too low – no available compensation | good | good |
| Phase noise improvement | N/A | N/A | –6 dB | –6 dB |
| Aging | low | high | low | good |
| Best choice | | | 2 | 1 |

*[Continued on page 114]*

"I need a quiet, compact VCO for a PCS basestation project."




You need the V616ME05 from Z-COMM.

| Frequency | Output Power |
|---|---|
| 1543-1618 MHz | 0±3 dBm |
| **Phase Noise 10kHz** | **Vtune** |
| -105 dBc/Hz | 1.5-8 V |
| **Sensitivity** | **Package** |
| 25 MHz/V | MINI-16 |

Come to the source ... Z-COMM.

Z-Communications, Inc.
9939 Via Pasar
San Diego, CA 92126
(619) 621-2700 • Fax (619) 621-2722
http://www.zcomm.com/solutions.html

CIRCLE 177

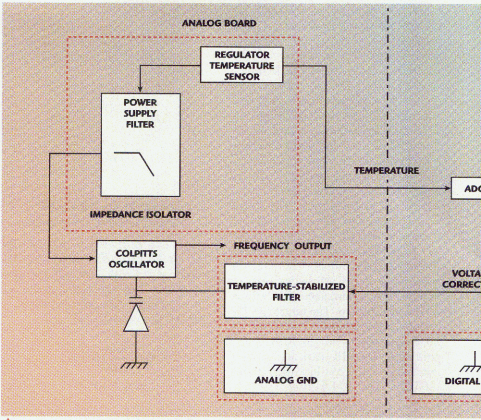


▲ *Fig. 4 The DTCXO's block diagram.*

to work with a third-overtone AT quartz resonator at 20 MHz, which increases the self-resonant frequency and the quality factor. The quartz resonator is fabricated using a high quality quartz with an optical quality > 2.4 million. The crystal blank then is polished to reduce the quartz resistance and to increase the quality factor. Gold metallization and a primary layout of chromium then are applied and manually finished to a high quality. A burn-in of the metallic layouts completes the crystal fabrication process. All of these procedures improve the electrode stability and, therefore, the long-term aging. Finally, a specific sealing paste is used that contributes to good aging; vacuum sealing reduces the quartz resistance in the final packaged resonator. A fast thermal cycling between –55° and +125°C over five days is utilized on the completed resonator.

## THE OSCILLATOR LAYOUT DESIGN

***Figure 4*** shows the DTCXO's block diagram and the ground separation. The power supply utilizes an integrated low band filter and isolation stages, which separate the impedance and amplify the current. The digital compensation section is isolated from the oscillator and output buffer.

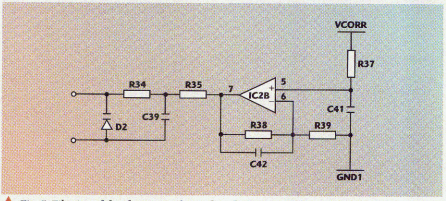


▲ *Fig. 5 Filtering of the phase noise due to digital compensation.*

SSI
Cable Corp.
Reliable Interconnections for Commercial and Military Applications
AN EXPLOSION OF OPTIONS
STAINLESS STEEL,
ALUMINUM,
COPPER &
FLEXIBLE CABLES.
PHASE MATCHED
DELAY LINES
WIRELESS PREPS
WIRE HARNESSES
LOW LOSS
SSI
Cable Corp.
E. 820 Hiawatha Blvd.
Shelton, WA 98584
(360) 426-5719
(360) 426-5912 fax
www.ssicable.com
sales@ssicable.com e-mail

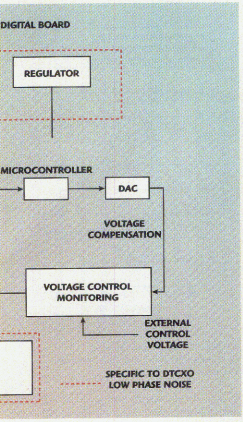


***Figure 5*** shows the integration of a low band filter prior to the varicap diode of the oscillator using temperature-stabilized components. This configuration strongly decreases the fast frequency variations due to the digital compensation and, therefore, decreases the noise. The low noise output thus is stabilized as a result of the temperature-stabilized components used for the filter. However, this filtering procedure has a strong influence on the start-up time of the DTCXO, which is calculated using

$$\tau = RC$$
$$= 4.7 \text{ s}$$

where

$R = 1\ M\Omega$
$C = 4.7\ \mu F$

## PERFORMANCE RESULTS

After manufacturing the 20 MHz AT third-overtone crystals in an HC46 cold weld package, a batch of 20 completed resonators was measured. The measurements indicated a crystal resistance of 15 Ω, an inductance of 28 mH and a capacitance of 2.3 fF with a Q of 206,000 to 252,000. The resonator's phase noise at 25°C is shown in ***Figure 6***. As a result, the actual experimental phase noise (green profile) is improved compared to the first theoretical approach (red profile). This conclusion can be verified using the formula

$$Q = \frac{f_0}{\Delta f}$$

where

$f_0 = 20$ MHz
$Q = 200{,}000$

The result is $\Delta f = 100$ Hz. If f represents the crossing point of the two slopes, the graph indicates approximately 45 Hz as the f value (45 Hz × 2 = 90 Hz, which is very close to 100 Hz).

Phase noise vs. temperature range is shown in ***Figures 7***, ***8*** and




▲ *Fig. 6 The resonator's phase noise vs. bandwidth.*

▼ *Fig. 7 Phase noise at –30°C.*




▼ *Fig. 8 Phase noise at 70°C.*




*[Continued on page 116]*

"Okay, what about a PCMCIA compatible VCO for a WLAN project?"




Get the SMV2165A from Z-COMM. Again.

| Frequency | Output Power |
|---|---|
| 2118-2218 MHz | 6±3 dBm |
| **Phase Noise 10kHz** | **Vtune** |
| -91 dBc/Hz | 0-3 V |
| **Sensitivity** | **Package** |
| 148 MHz/V | SUB-L |

Come to the source ... Z-COMM.

Z-Communications, Inc.
9939 Via Pasar
San Diego, CA 92126
(619) 621-2700 • Fax (619) 621-2722
http://www.zcomm.com/solutions.html

CIRCLE 178

Experience the Nexyn Innovation

QUIET!

Now Delivering and PRECISE

LMDS Phase Locked DRO's

13.2 GHz Phase Noise (HP E5500)







- Reliable and Rugged Design
- Extremely Low Microphonics
- 100-200 MHz External Reference
- Frequency: 4 to 18 GHz
- Power output: +13dBm
- Spurious: -80 dBc
- Harmonics: -20 dBc
- +12 V @ 160 mA
- -10 to +65 C
- Size: 2.25" x 2.25" x .65"

Phase Noise at 13.2 GHz (Typical)

| | |
|---|---|
| 100 Hz | - 86 dBc/Hz |
| 1 KHz | -106 dBc/Hz |
| 10 KHz | -118 dBc/Hz |
| 100 KHz | -122 dBc/Hz |
| 1 MHz | -135 dBc/Hz |



Nexyn Corporation
678 Bend Drive
Sunnyvale,CA 94087

Tel: (408) 732-0793
Fax: (408) 730-0378
Visit our website at www.nexyn.com

Excellent Technical Support
Guaranteed Performance and
Competitive Pricing
(Seeking Sales Reps)

116 CIRCLE 120







▲ *Fig. 9 Phase noise at 25°C.*

*Fig. 10 Typical capacitance change vs. temperature for a tantalum dielectric capacitor.* ▼







▲ *Fig. 11 Capacitance change vs. temperature for a multilayer ceramic Y5V capacitor.*

**9**. The technical problems relating to phase noise vs. temperature range were described at the beginning of this article. Raised noise close to the carrier was observed as shown on the three curves at +25°, +70° and –30°C. The excessive noise was due to the increased cutoff frequency of the filter used to reduce noise on the correction signal coming from the digital system.

The –40 dBc/Hz filter slope was shifted above 10 Hz and influenced the previous –30 dBc/Hz slope from 10 to 100 Hz. The implemented capacitors were responsible for this effect. Initially, Y5V-type capacitors were used; these components were subsequently replaced by tantalum dielectric types. Thus, capacitor stability vs. temperature range is an important criterion to take into account. ***Figures 10*** and ***11*** show the change in capacitor vs. temperature for both capacitor types.

As shown previously, the phase noise specification has been met. In addition, the use of a third-overtone AT-cut crystal has provided an aging of $\pm 2.10^{-7}$/year and the digital compensation has produced good results (±0.10 to ±0.15 ppm over the –30° to +75°C temperature range). The only detrimental effect seen on the oscillator is the start-up time slow down due to filters with high $\tau$ (a few seconds). However, for the applications addressed by this DTCXO this parameter is not a major consideration. In addition, a higher level of physical integration of such a device could be difficult considering the 20 MHz AT third-overtone crystal design. Lastly, care must be exercised in the phase noise measurement method. The bandwidth of the analysis filters on the test bench must be set up very tightly to observe the noise near the carrier.

## CONCLUSION

This article has described two important points that must be addressed to comply with the required DTCXO specification. The crystal unit's quality factor must be greater than 200,000 as a target to improve phase noise near the carrier and aging, and the electronic circuit design must reduce noise due to the power supply and implement active filters to reduce noise induced by digital compensation. ■

## Reference

1. John R. Vig, *Quartz Crystal Resonators and Oscillators for Frequency Control and Timing Applications*, CQE internal document, January 1993.

# Quick Connections

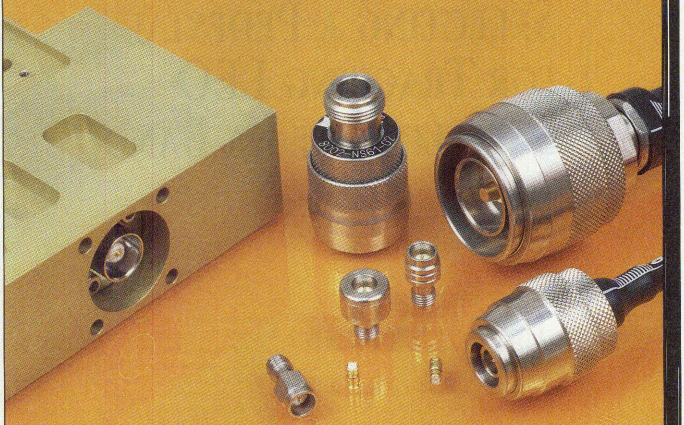

**THE PUSH-ON CONNECTORS AND CONNECTOR SAVERS WERE DEVELOPED TO ELEMINATE ALL THE TIME CONSUMING TIGHTENING, TORQUING AND LOOSENING OF CONNECTORS! 7/16 PUSH-ON, BMA, N PUSH-ON, SBX, SBY, SMA PUSH-ON, SMA REVERSE SEX PUSH-ON, SMP, TNC PUSH-ON .....**

**Spectrum** Elektrotechnik GmbH

80905 Munich, Germany
P.O. Box 45 05 33

Fax:{49}-(89)-354-804-90, Telephone:{49}-(89)-354-804-0
(country code - city code) (country code - city code)

e-mail: specelek @ CompuServe.com

quickconnections99adv.pm6

CIRCLE 150 ON READER SERVICE CARD

# SELECTING A PEDESTAL FOR TRACKING LEO SATELLITES AT KA BAND

This article discusses the issues involved in selecting a pedestal for tracking low earth orbit (LEO) satellites. LEO satellites offer several advantages over their geostationary earth orbit (GEO) cousins. Compared to a GEO, a LEO satellite has lower launch costs, reduced power requirements and a significantly reduced roundtrip transmission delay. While a constellation of GEOs can only see earth stations with latitudes less than 81°, the use of polar orbits allows a LEO constellation to communicate with all points on the globe.[1] The disadvantages of a LEO satellite are that the earth station must spatially track the satellite across the sky and compensate for Doppler frequencies that are quite large.

The popularity of LEO satellites is increasing rapidly. The advent of constellations such as Iridium (66 satellites), Teledesic (228 satellites), Skybridge (80 satellites) and Globalstar (48 satellites) suggests that LEO constellations could become the basis of future two-way wireless communications systems. This possibility makes the tracking of LEO satellites an important issue for today's earth station designer. Of the systems discussed here both Iridium and Teledesic use Ka-band links in some form.

The tracking of LEO satellites at Ka band provides new challenges in designing and manufacturing earth stations. The high frequencies of the Ka band mean even a medium-sized antenna produces a narrow beamwidth, resulting in stringent antenna pointing requirements. For example, a 1.2 m parabolic antenna has a 3 dB beamwidth of 0.58° at 30 GHz and 0.88° at 20 GHz. The combination of the uplink and downlink beamwidths requires a pointing accuracy on the order of 0.3° to minimize attenuation caused by pointing errors.

Only the fastest and most expensive azimuth-elevation pedestals are able to continuously track LEO satellites on high elevation passes. The problem occurs when the satellite approaches and departs from its highest elevation. At this point the pedestal must make high speed azimuth movements in order to track the satellite. Insufficient azimuth speed results in the earth station being unable to track the satellite continuously for passes that exceed a particular maximum elevation.

Several methods have been suggested to overcome this problem, including trajectory optimization where the antenna trajectory is modified to minimize antenna pointing losses on or near zenith passes.[2] However, a narrow

*[Continued on page 120]*

KEITH WILLEY
*University of Technology, Sydney (UTS), Cooperative Research Centre for Satellite Systems*
*Sydney, Australia*

# HIGH IP3 MIXERS

## +30dBm IP3




**5 to 2200MHz** from **$14.95** (1-24 qty.)

The popularity of wireless communication services is soaring, but when signal overcrowding creates intermodulation distortion... Mini-Circuits has the solution! Our full range of low distortion, high IP3 SYM mixers provide the muscle it takes to ***suppress noisy intermods*** and unwanted signals. At the same time, these affordable surface mount solutions achieve low conversion loss and excellent L-R, L-I isolation. Developed for both analog and digital use, applications include airphone, cellular and cordless phones, radar, satellite, FM Broadcast, ISM, PCS, and PCN. Achieve the high performance your customers expect. Specify low loss, high IP3 SYM mixers from Mini-Circuits. It's the *clear* choice!



TYPICAL SPECIFICATIONS:

| Model | Freq. (MHz) | IP3 Midband (dBm) | Isolation (dB) L-R | Isolation (dB) L-I | Conv. Loss Midband (dB) | Price $ea. Qty. 1-24 |
|---|---|---|---|---|---|---|
| SYM-18H | 5 -1800 | 30 | 45 | 40 | 5.75 | 16.85 |
| SYM-15VH | 10 -1500 | 31 | 45 | 35 | 6.5 | 27.95 |
| SYM-14H | 100-1370 | 30 | 36 | 30 | 6.5 | 14.95 |
| SYM-10DH | 800 -1000 | 31 | 45 | 29 | 7.6 | 17.80 |
| SYM-22H | 1500 -2200 | 30 | 33 | 38 | 5.6 | 18.75 |
| SYM-20DH | 1700-2000 | 32 | 35 | 34 | 6.7 | 14.95 |

*All models are surface mount and available in tape and reel.*
*LO=+17dBm except SYM-15VH LO=+23dBm*




***Mini-Circuits...we're redefining what VALUE is all about!***

**Mini-Circuits®**

US 106 INT'L 107
CIRCLE READER SERVICE CARD

P.O.Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

YONI™ ***The Design Engineers Search Engine*** *Provides ACTUAL Data Instantly From MINI-CIRCUITS At:* ***http://www.minicircuits.com***

**ISO 9001 CERTIFIED**

F 320 Rev Org

beamwidth precludes the use of this technique. Other solutions include the use of either an azimuth-elevation-tilt pedestal or an X-Y pedestal. Both of these pedestals allow zenith pass tracking.

## AZIMUTH-ELEVATION PEDESTALS

For azimuth-elevation pedestals, the pedestal's azimuth speed is usually the limiting factor that prevents zenith tracking of a LEO satellite, as shown in ***Figure 1***. For example, a pedestal with a maximum azimuth velocity of 4°/sec would be unable to continuously track a satellite with a 780 km sun-synchronous orbit (UoSAT-3) for passes with a maximum elevation greater than 82°. In the case of a zenith pass there would be a loss of communications with the satellite for a minimum of 45 seconds. This down time is significant when you consider that during an overhead pass a satellite of this type is only at elevations > 20° for approximately 7.4 minutes.

***Figure 2*** shows the minimum time lost in seconds for passes of a satellite with a 780 km orbit with different maximum elevations for an azimuth-elevation pedestal (which is azimuth limited) with maximum azimuth speeds of 2, 4, 6 and 8°/sec. The situation is even more critical when communication is via a single LEO satellite. In this case, it is not uncommon that during a significant period of time the only usable satellite pass may have a maximum elevation that requires azimuth movements in excess of the earth station's pedestal capability. This condition occurs because all of the other available passes may have low peak elevation angles. ***Figure 3*** shows an example of this scenario involving passes of a UoSAT-3 satellite over an earth station in May 1998. In an urban environment, K-band communications for such passes is almost impossible due to multipathing.[3] Even when communication is via a constellation of LEO satellites, these same urban environment restrictions may dictate the use of high elevation satellite passes.

It is important to utilize these high elevation passes as much as possible because they provide the best signal-to-noise ratio and, hence, allow communication at the highest possible data rates to take place. In addition, the maximum elevation of a particular pass is directly related to the amount of time that the satellite is visible to the earth station. The higher the maximum elevation the longer the satellite is visible.

An additional problem occurs if closed-loop tracking is being used to follow the satellite on a near-zenith pass and the pedestal approaches its velocity limits in either azimuth or el-




▲ *Fig. 1 The azimuth-elevation pedestal.*




▲ *Fig. 2 Time the pedestal will be unable to track a 780 km satellite for passes with different maximum elevations and pedestals with various azimuth speeds.*




▲ *Fig. 3 Passes of a UoSAT-3 satellite over an earth station at −33.9° lat/151.8° long on May 10, 1998.*

[Continued on page 123]

MILITARY MICROWAVE POWER AMPLIFIERS



CTT is delivering!
- Wideband
  - 1–2 GHz, 14 W
  - 2–4 GHz, 10 W
  - 4–8 GHz, 10 W
  - 6–18 GHz, 10 W
- Tx & TWT Replacements
  - S & C-Band, 150 W
  - X-Band, 100 W
  - Ku-Band, 40 W
- Pulse Power
  - 3 GHz, 1 kw
  - 10 GHz, 1 kw

3005 Democracy Way
Santa Clara, CA 95054
Phone: 408-988-8521 • FAX 408-986-9097
e-mail: sales@cttinc.com
Visit our web site: www.cttinc.com

CTT INC.

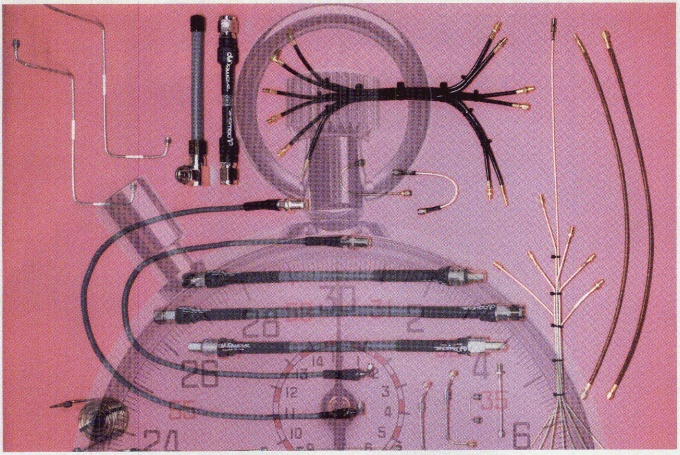

# WHEN YOU NEED YOUR CABLE ASSEMBLIES RIGHT AND RIGHT NOW, CALL THE LEADER.

To be more efficient and more competitive, call a company that's more efficient and competitive. Dynawave. For over ten years, we've been designing and manufacturing low cost, superior quality cable assemblies, delay lines, and harnesses for the wireless and military markets. Our on-demand and just-in-time delivery systems can satisfy the most stringent procurement requirements. And we can deliver prototypes, short runs, and high volume production with the same efficiency.




For high quality flexible, semi-rigid, delay lines, phase matched, and harnesses when you need them, call us today. Or send for a free brochure. Either way, it's time to switch to Dynawave.

dynawave®
INCORPORATED

135 Ward Hill Ave., P.O. Box 8224, Haverhill, MA 01835 U.S.A.
Tel: 978-469-0555 / Fax: 978-521-4589 / E-mail: connect@dynawave.com / Website: www.dynawave.com

CIRCLE 40 ON READER SERVICE CARD

# Technology of the Future - available today !



## One stop microwave components

**AMERICAN TECHNICAL CERAMICS**
UHF/Microwave high Q, low loss capacitors.
Multilayer & single-layer, Low ESR up to 1 MFd,
High volt HF/UHF power capacitors

**METCLAD**
PTFE/glass laminates
DK 2.17 to 10.4
Ultra high copper & metal back adhesion

**COMPONENT GENERAL INC**
High Power Resistors, Terminations, Attenuators &
Coaxial Terminations

**VOLTRONICS CORPORATION**
Sealed, non-rotating piston trimmer capacitors,
Sapphire, glass, air quartz & teflon, DRO & Microwave
Tuners, Miniature ceramics trimmers, 15KV trimmers

**NEW FROM ATC**
POWER CAPACITOR ASSEMBLIES
Up to 20 KVDC, 130A
Low ESR, High Q

ISO 9002:1994
APPROVED STOCKIST

**Phase Components Ltd.**

NQA ISO9002 REGISTERED COMPANY

Certificate No. 4311

CIRCLE 123 ON READER SERVICE CARD

**Tel: 01403 241862 Fax: 01403 241858**

evation. At such a point there is little or no spare capacity left to make off-boresight movements to track the satellite. Thus, the tracking process, should it be required, would have to be suspended until the satellite reached a lower elevation.

## AZIMUTH-ELEVATION-TILT PEDESTALS

An azimuth-elevation-tilt pedestal, shown in ***Figure 4***, is an azimuth-elevation pedestal with the addition of a third axis. The tilt axis is perpendicular to the elevation axis. This type of pedestal is sometimes called a three-axis pedestal. At high elevations the elevation and tilt axes are used together to allow full hemispherical tracking of the satellite (including zenith passes); that is, the required elevation-pointing angle is obtained using a combination of the elevation and tilt axes. This capability reduces the elevation axis component of the required pointing angle and, thus, allows sufficient time for the azimuth axis to rotate without exceeding its maximum azimuth drive velocity.[4]

While the azimuth-elevation-tilt pedestal allows full hemispherical tracking it does have some disadvantages. The addition of the third axis increases the unit's weight, complexity and manufacturing cost compared to either an X-Y or azimuth-elevation pedestal. In addition, the interaction of the elevation and tilt axes increases the complexity of the required control electronics. Premission orbit determination is required to predict whether the tilt axis will be needed to allow the satellite to be tracked for the entire pass.[5] In addition, prepositioning the tilt axis prior to a pass increases the setup time.[5] This increase may become significant if an earth station is being used to sequentially track more than one satellite.

## X-Y PEDESTALS

As shown in ***Figure 5***, an X-Y pedestal has two orthogonal axes: the first is a horizontal fixed primary axis; the second is perpendicular to and mounted on top of the first axis.[4] This configuration allows the pedestal to provide zenith pass tracking even




▲ *Fig. 4 The azimuth-elevation-tilt pedestal.*

▼ *Fig. 5 An X-Y pedestal.*




Ceramic Porcelain Capacitors & Trimmer Capacitors

You are looking for...

Small size
Low cost
Short lead time
Standard or custom design

Think TEMEX!

America: 1.623.780.1995
Europe: +33 1 49 88 49 32
www.temex-components.com

Only TEMEX makes it happen.

TEMEX MICROWAVE

Materials • Capacitors • Ferrites Devices • Diodes • VCO/PLL • Filters/Duplexers



CIRCLE 160 ON READER SERVICE CARD




▲ *Fig. 6 Pedestal velocity requirements for an 84° elevation pass of a UoSAT-3 satellite.*

with the use of relatively low speed motors. ***Figure 6*** shows the pedestal velocity requirements for an 84° elevation pass of a satellite with a 780 km sun-synchronous orbit over Sydney for both the X-Y and azimuth-elevation cases. An X-Y pedestal design offers several advantages over its azimuth-elevation-tilt and azimuth-elevation counterparts.

For an X-Y pedestal design the required angular velocities of both axes remain within a small range for all but the lowest elevation satellite passes. This condition is not the case for an azimuth-elevation pedestal where the required angular velocity in azimuth increases rapidly as the maximum elevation of a satellite pass approaches 90°. For an overhead pass of a LEO satellite with an 800 km orbit, the maximum angular velocity required by either axis is only a fraction of a degree per second. This low velocity produces improved pointing accuracy[5] compared to the three-axis system where the angular velocity required is significantly higher. Another advantage is that the X and Y axes are identical, which means that the required spare parts can be kept to a minimum.[6] In addition, the pedestal can be built from high quality, off-the-self components, which allow economical designs to be constructed[6] for a wide range of operating conditions and antenna sizes. Off-the-self components also mean low cost maintenance. The X-Y pedestal uses brushless DC motors, which eliminate the need for expensive rotary joints and slip rings.[6] Finally, the X-Y pedestal is a low cost solution where the simplicity of the design compared to a three-axis pedestal increases the mean time between failures (MTBF).[5]

A standard PC can be used to control the X-Y pedestal, allowing software adjustment of parameters such as tracking speed and tracking range to be set by the user. Two resolvers (one mounted on the shaft of each of the two motors) provide feedback on the antenna pointing angles. Note that an X-Y pedestal is still not capable of full hemispherical tracking but, unlike the azimuth-elevation pedestal that is unable to continuously track high elevation passes, the X-Y pedestal has its limitations at low elevation angles (< 2°) around 90° and 270° in azimuth. At these elevations the satellite moves slowly with respect to the earth station and even small capacity motors (6°/sec) are sufficient to minimize the tracking loss. In any event, it is difficult to imagine a practical application in which such low elevation passes would be required.

## CONCLUSION

Azimuth-elevation pedestals, with the exception of the fastest and most expensive, are unable to continuously track LEO satellites on high elevation passes. This drawback results in loss of communications with the satellite at high elevations, which is the time when the signal should have its highest signal-to-noise ratio. It also causes reduced capacity to perform closed-

### PEDESTAL DESIGN OF THE UTS KA-BAND EARTH STATION FOR TRACKING LEO SATELLITES

The Cooperative Research Centre for Satellite Systems in Australia is scheduled to launch the FedSat LEO satellite in November 2001. FedSat will have an 800 km sun-synchronous orbit at an inclination of 98.6°. Its communications payload includes a Ka-band segment that will allow communications at 30 GHz (uplink) and 20 GHz (downlink). UTS has designed an X-Y pedestal for use in its earth station. A standard PC controls the operation of the pedestal.

*[Continued on page 126]*



# One source

## TEMPERATURE COMPENSATED CRYSTAL OSCILLATORS

**Complete Range Of TCXO's...**

- Frequencies to 160 MHz
- Models From 2.5 ppm to 0.05 ppm
- Aging to 0.7 ppm for 10 Years
- Satcom TCXO's $\pm 1 \times 10^{-7}$ 0°C to + 70°C
- Phase Noise as low as -155 dBc offset @ 1 KHz offset
- Low Power Consumption
- Small Size, Low Profile Surface Mount Designs




STRATUM 3
SONET/SDH
SATCOM
ROUTERS
PICO CELLS
PCS
GSM
GPS
PCMCIA

**New Stratum 3 Design**

**We *are* the One!**

VECTRON INTERNATIONAL
A DOVER TECHNOLOGIES COMPANY

166 Glover Avenue, Norwalk, CT 06856
Tel. 1-88-VECTRON-1 • Fax. 1-888-FAX-VECTRON
e-mail: vectron@vectron.com
www.tcxo.com www.vectron.com

CIRCLE 173 ON READER SERVICE CARD

loop tracking at higher elevation and creates the possibility of having only limited ability to communicate with LEO satellites, especially when the earth station is located in an urban environment.

While an azimuth-elevation-tilt pedestal allows full hemispherical tracking, the addition of the third axis increases its manufacturing cost and the complexity of the required control electronics. The least expensive and most elegant solution to this problem is to use an X-Y pedestal. An X-Y pedestal allows zenith pass tracking even with relatively low speed motors. Additional advantages of an X-Y design include identical X and Y axes, which keep spare part requirements to a minimum,[6] and the ability to use high quality, off-the-self components, which allow significant savings.[6] In addition, the use of brushless DC motors eliminates the need for expensive rotary joints and slip rings.[6] The X-Y pedestal provides improved tracking accuracy for overhead passes compared to three-axis pedestals,[5] and offers an improved MTBF compared to other pedestals.[5]


## ACKNOWLEDGMENT

The author would like to thank Michael Eckert, UTS, who edited this article; Ray Clout, UTS, for his input; Ken Bone, Darius Ltd., for his comments regarding the limitations of X-Y pedestals; and Irene Stephens, Australian Broadcasting Corp., and Andrew Thoms, UTS, who created the drawings of the different pedestal types. While the pedestal design and construction are the result of input from several people on the project, Ray Clout performed the majority of the work. The project leader at UTS is Sam Reisenfeld. This work was carried out with financial support from the Commonwealth of Australia through the Cooperative Research Centres program. The UoSAT-3 satellite was built by SURREY Space Centre and launched on January 22, 1990. It has a 780 km sun-synchronous orbit at an inclination of 98°. ■


## References


1. T.S. Kelso, "Basics of the Geostationary Orbit," *Satellite Times*, May 1998.
2. P.S. Crawford, "Trajectory Optimization to Minimize Antenna Pointing Error," *Computing and Control Engineering Journal*, April 1995.
3. H. Wakana, "Fade Characteristics for K-band Land-mobile Satellite Channels in Tokyo Measured Using COMETS," *Electronics Letters*, Vol. 35, No.22, October 1999, pp. 1912–1913.
4. G. Marial and M. Bousquet, *Satellite Communications Systems*, Third Edition, Wiley, 1998.
5. C. Busch, P. Lancaster and E. Payne, "A Mobile 4.3 Metre Remote Sensing Ground Station Rapid Deployment and High Performance," *International Telemetering Conference Proceedings (33)*, October 27–30, 1997.
6. DARIUS, Darius Tracking Pedestal (DTP), www.darius.co.uk/products/antenna/index.htm.



**Keith Willey** *worked for 20 years in the television broadcast industry before receiving his BSEE from the University of Technology, Sydney (UTS) in 1997. As part of his PhD research, he joined the faculty of engineering at UTS' Cooperative Research Centre for Satellite Systems. Willey's research interests include the spatial acquisition and tracking of LEO satellites operating at Ka band. He is involved in the design of the Ka-band earth station being built by UTS.*



Complete Repeater Module

with all RF functions to build repeaters

Our Repeater Module with built-in PLL synthesizer delivers complete RF solution to building repeaters. Low cost, small size and more reliable.




We custom design without extra cost

For Cellular, GSM, PCS and WLL

Also Available: GaAs Up/Down Converter, LNA, Power Amplifier

Block Diagram




It is possible to change block diagram depending on the conditions.

Specifications

| Model Parameter | MRM-05-2222A Forward | MRM-05-2223A Reverse |
|---|---|---|
| Input/Output Frequency | 935 - 960 MHz | 880 - 915 MHz |
| IF Frequency | 70MHz | |
| Input Signal Level | -100 ~ -40dBm | |
| Band width | OPTION | |
| Noise Figure | 2.5dB(@ Gain 60dB) | |
| Conversion Gain | 80dB typ | |
| Gain Flatness | ±1.0dB | |
| 1dB Compression Point | 20dBm | |
| IMD (min.) | 50dBc @10dBm typ | |
| Phase Noise | -80 dBc/10KHz, -90 dBc/100KHz | |
| Attn Range(Optional) | 30dB/1dB step;2dB step | |
| Input/Output VSWR | 1.5 :1 typ | |
| Input/Output Impedance | 50 Ω | |
| SAW Filter Rejection | -50 dB BW. ± 10.6 MHz | |
| Spurious | -60 dBc @ fo ± 1.56 MHz | |
| LO Leakage of Output | -26 dBm | |
| Input Voltage | 9~12V @ 1300mA | |

mcc

Microwave Communications & Components, Inc.

Headquarters
14th Fl. Prime Center, 546-4, Guui-Dong, Kwangjin-Gu, Seoul, Korea
Tel : 82-2-3424-0800 Fax : 82-2-3424-0808

Website : www.mcck.com
E-Mail : sales @mcck.com

Distributor / Sales Representative Wanted

# You are on a power trip...

## you design amplifiers and every last dBm counts.

## rely on Harmonica

You don't want any surprises when the part that performed so well during simulation is built and tested. No shifted gain. No premature saturated power or unaccounted spectral regrowth...and certainly no oscillations.

Successful amplifier designs demand optimal ACPR, power, IP3, nonlinear stability and yield. That's why many engineers are turning to Harmonica, the most powerful high-frequency circuit design solution available for the PC desktop. With physics-based distributed models and a time-tested Harmonic Balance engine, Harmonica delivers superior speed, accuracy, power and functionality. And as a part of Ansoft's Serenade Design Environment, Harmonica offers seamless links to layout, system simulation, electromagnetics, and third-party tools.

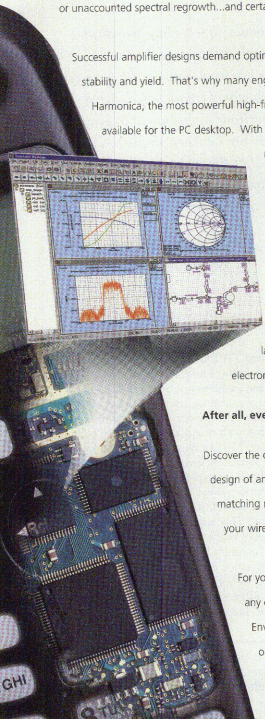

**After all, every dBm counts.**

Discover the difference Harmonica makes in the design of amplifiers, mixers, oscillators, filters, matching networks and other components in your wireless design.

For your free evaluation copy of Harmonica or any of the tools in Ansoft's Serenade Design Environment call 412-261-3200 or send e-mail to info@ansoft.com.

**CIRCLE 20 ON READER SERVICE CARD**

## Power Trip

ANSOFT

high performance EDA

www.ansoft.com

# INCREASING MULTITONE POWER NEAR SATURATION

*Microwave high power amplifiers (HPA), particularly traveling-wave-tube amplifiers (TWTA) and klystrons, are increasingly being used for the transmission of multitone signals. Such signals are frequently in the form of complex digitally modulated waveforms as orthogonal frequency division multiplex or CDMA. Some systems require multitone operation at or near saturation. This article investigates the relationship between single-tone and multitone saturated power. It is demonstrated that the two-tone and multitone ($\geq 4$) saturated power of TWTAs and similar amplifiers can be increased by more than 1 and 2 dB, respectively, through the use of a limiter-linearizer combination.*

The need to transmit greater amounts of information has greatly increased the use of microwave HPAs with multitone signals. Many of these systems require only moderate linearity. In some cases the HPA can be operated at or very near saturation and still provide the specified bit error rate and/or intermodulation distortion (IMD) performance. In such systems multitone saturated power becomes a key parameter.

The choice between solid-state and vacuum technology (TWTAs and klystrons) is often made by the required saturated power. At low power levels almost all factors favor a solid-state approach. However, as the required power increases, the trade-offs move to favor a TWTA and, eventually, a klystron solution. For example, at C-band a 400 W TWTA is approximately a quarter of the size, draws half the DC power and costs about 50 percent less than a comparable solid-state power amplifier (SSPA). SSPAs are considered to provide linearity superior to TWTAs, but modern linearized TWTAs (and klystrons) have comparable or better linearity.

One problem not solved by a linearizer is the issue of multitone saturated power. It is generally known that power amplifiers saturate at a lower level with multiple carriers than with a single carrier. TWTAs typically provide a lower multitone saturation level than SSPAs. However, little has been written to quantify these differences. Multitone power levels are frequently measured with a conventional power meter during HPA testing. This approach yields satisfactory results at higher output power backoff (OPBO), but can be in error by 1 dB or more near saturation. This discrepancy occurs because power meters respond to both carrier and IMD power. (A low-pass filter is commonly used to eliminate harmonic, but not IMD, power).

*[Continued on page 130]*

ALLEN KATZ
*Linearizer Technology Inc.*
*Hamilton, NJ*

# Thought you had to sacrifice performance for reliability?

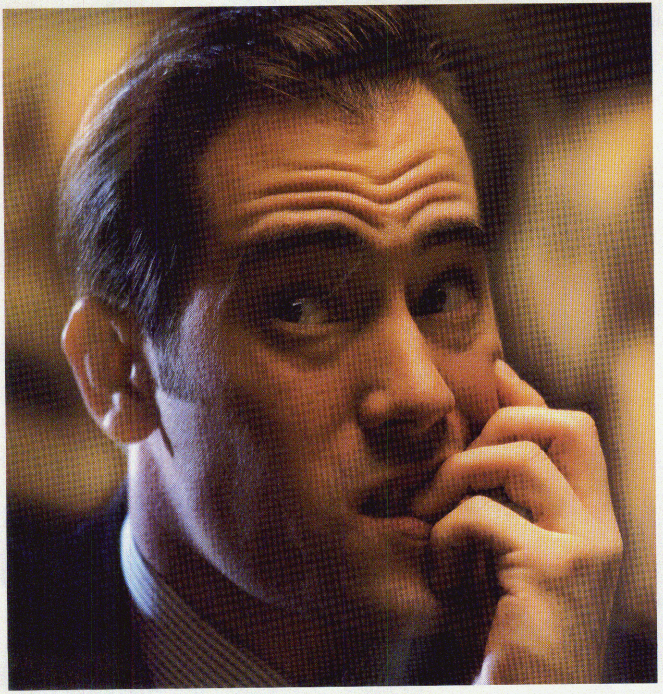

## Think again.

### Introducing PureSource. Lasting reliability at last.

Now there's PureSource. Engineered for maintenance-free performance and generating very little heat, these high performance sources are tweak-free for at least ten years. The PureSource lines are engineered to get the maxium performance out of your system with low microphonics, low phase jitter, low spurious products and low aging. For clean performance, low bit error rate, and maintenance-free reliability there's only one word to think about. PureSource.




PureSource
Lasting reliability at last.

A Microwave dB product • Tel: 805-499-0410
Fax: 805-498-0054 • **www.microwavedb.com**

CIRCLE 77 ON READER SERVICE CARD

## MULTITONE SATURATED POWER

The multitone (or carrier) saturated power ($P_{MTSAT}$) can be related to three factors

$$P_{MTSAT} = P_{STSAT} - \Delta P_{ENV} - P_{IMD} - \Delta P_{DP} \quad (1)$$

where

$P_{STSAT}$ = single-tone saturated power
$\Delta P_{ENV}$ = power loss due to the changing envelope of the multitone signal
$P_{IMD}$ = power converted to IMD
$\Delta P_{DP}$ = power loss due to any decrease in power as an amplifier is driven beyond saturation

TWTA output power decreases with input power beyond saturation as shown by the TWTA transfer curve in




▲ *Fig. 1 Input/output power transfer characteristics of a TWTA and L/TWTA showing the elimination of postsaturation power decrease using a limiter-L/TWTA combination.*

*Fig. 2 A vector network analyzer used as a tuned power meter to measure carrier power independent of IMD.* ▼

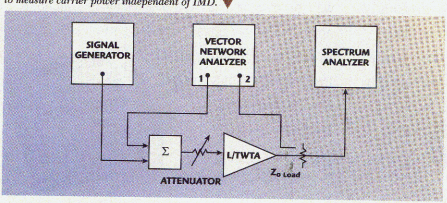


***Figure 1***. The $\Delta P_{DP}$ term is the principal cause for the lower $P_{MTSAT}$ displayed by TWTAs in comparison to SSPAs. Generally, SSPAs maintain a constant output level beyond saturation. (Some SSPAs also drop in power beyond saturation. In the SSPA case, the drop is usually due to thermal effects and not a result of inherent device physics.)

The value of $P_{MTSAT}$ was investigated both experimentally and by simulation. Special care was taken to measure only signal (carrier) power during testing. An HP 8720C vector network analyzer was used both as a signal source to generate one of the test carriers and as a tuned power meter to precisely measure carrier power, as shown in ***Figure 2***.

The amount of power loss depends not only on the transfer characteristics of the amplifier, but also on the characteristics of the signal. Generally, the greater the peak-to-average ratio of the signal, the greater the loss in power. ***Figure 3*** shows the envelope of a two-tone signal (3 dB peak-to-average power ratio), the same signal after passing through an SSPA-like amplifier (no power drop beyond saturation) driven to near saturation and the same signal after passing through a TWTA-like amplifier driven to near saturation. (Note the dimple in the third plot.) Even though the average power has not quite reached saturation, the instantaneous input power is at times well beyond the level for saturation and must cause a power drop at these times. As the peak power increases, the power drop becomes greater and the corresponding dimple becomes deeper.

The difference between $P_{MTSAT}$ and $P_{STSAT}$ in decibels can be expressed as

$$\Delta OPBO_{SAT} = 10\log\left(\frac{P_{MTSAT}}{P_{STSAT}}\right) \quad (2)$$

For a typical TWTA with two-tone excitation, $\Delta OPBO_{SAT}$ is approximately 1.6 dB.

## THE EFFECT OF LINEARIZATION ON $P_{MTSAT}$

Linearizers are used to increase amplifier linearity. They allow HPAs to operate closer to saturation for a given level of IMD. Predistortion-type (PD) linearizers have been used almost exclusively with TWTAs.[1,2] PD has been employed because of its excellent performance, relative simplicity and ability to be added to an existing amplifier as a separate, stand-alone module. PD linearizers generate a nonlinear transfer characteristic, which equalizes the amplifier's transfer characteristics in both magnitude and phase.

The gain of the linearizer must increase with input level to cancel the TWTA's corresponding decrease in gain. An increasingly greater change in gain is required for distortion compensation as saturation is approached. This gain increase should cease at the point where the TWTA is driven to saturation. However, such a response is very difficult to achieve in practice. Most linearizers cannot turn off their increasing gain immediately. Consequently, the TWTA is driven further into saturation by the linearizer, as il-




▲ *Fig. 3 Effect of amplification near saturation on the signal envelope; (a) two-tone signal envelope, (b) two-tone signal after passing through an SSPA-like amplifier driven into saturation and (c) two-tone signal after passing through a TWTA-like amplifier driven into saturation.*

[Continued on page 132]

# REACTEL, INC.

# will custom build

## AT NO EXTRA COST

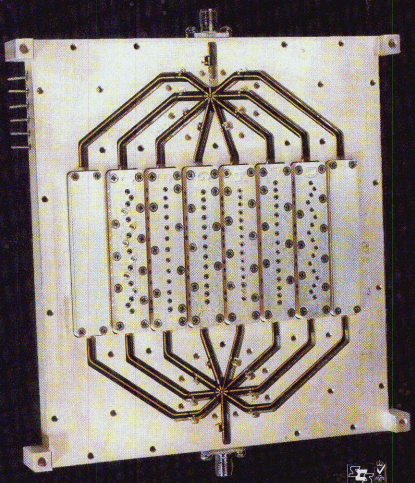

ISO 9001 Certified certification #960161

Any Switch Filter Bank in the smallest package, and **fastest solid-state switches in the industry,** covering the frequency range from 10 MHz. to 18 Ghz.

Our business is custom building of RF & microwave filters, diplexers, multiplexers, switch filter banks, and mixers at **no custom building prices.**

Talk to any of our experienced engineers about your requirements or **visit our web site**, and see some of the actual performance curves, and spec's for similar units.


**REACTEL, INC.**

Address > 8031 Cessna Ave. Gaithersburg, MD 20879

Phone > 301.519.3660 Fax > 301.519.2447

Email > reactel@reactel.com

Web Site > www.reactel.com


CIRCLE 133 ON READER SERVICE CARD




*Fig. 4 The loss in saturated power due to multicarrier excitation.*

*Fig. 5 PEP (overdrive) and $\Delta OPBO_{SAT}$ reduction by preceding the TWTA with a limiter.*




lustrated by the linearized TWTA (L/TWTA) curve shown previously. This growth in overdrive causes a further decrease in $P_{MTSAT}$. The resulting $\Delta OPBO_{SAT}$ for a L/TWTA can be greater than 2 dB.

***Figure 4*** shows how $\Delta OPBO_{SAT}$ varies with the instantaneous peak decrease in power, beyond saturation, due to overdrive for a typical TWTA. (This decrease can be obtained from the input/output power transfer characteristics by entering the peak envelope power (PEP) of the multitone signal.) The displayed curves were calculated and measured for a two-tone signal, but appear to also apply for cases involving a higher number of tones.

**TABLE I**

**$\Delta OPBO_{SAT}$ IMPROVEMENT ACHIEVED BY ADDING A LIMITER TO A TWTA AND L/TWTA**

| Excitation | $\Delta OPBO_{SAT}$ Reduction (dB) TWTA | L/TWTA |
|---|---|---|
| One-tone | 0 | 0 |
| One-tone QPSK | < 0.1 | < 0.1 |
| Two-tone | ~ 0.6 | ~ 1.0 |
| Four-tone | ~ 1.0 | ~ 2.0 |
| N-tone (NPR) | ~ 1.2 | ~ 2.3 |

*Fig. 6 The enhancement in C/I near saturation with the addition of a limiter to a L/TWTA.*




## THE ADVANTAGE OF LIMITING

Preceding the TWTA with a limiter can reduce the PEP overdrive. If the limiting point is made to coincide with the point of TWTA saturation, as shown in ***Figure 5***, overdrive and the consequent $\Delta P_{PD}$ can be prevented. Unfortunately, real limiters tend to have a soft transition into limiting. This gradual change in gain degrades TWTA linearity and increases IMD. Combining a limiter with a linearizer can produce a near-ideal transfer characteristic. The linearizer compensates for the limiter's gain change while the limiter prevents the linearizer from overdriving the TWTA. The input power/output power transfer characteristics of a limiter-L/TWTA combination with the limiter adjusted for different levels of PEP overdrive were displayed previously. The $\Delta OPBO_{SAT}$ of a two-tone signal can be reduced to less than 0.9 dB without any sacrifice in IMD performance at higher backoff levels when the limiter is set for a 0 dB PEP overdrive. Carrier-to-IMD (C/I) performance can actually improve close to




*Fig. 7 The increase in near-saturation carrier power and NPR with the addition of a limiter.*

saturation. The advantage of combining a L/TWTA with a soft limiter was first recognized by G. Satoh and T. Mizuno.[3] Actually, the more rapidly a limiter can switch from a constant gain to a constant power state, the more effective it will be in this application.

The effect of a limiter with a L/TWTA was also examined for single-tone (with and without quadrature phase-shift keying (QPSK) modulation), four-tone and infinite-tone (noise power ratio (NPR)) excitation. As expected, the use of a limiter was determined to not affect single-carrier saturated power. However, it should be noted that limiters can produce harmonics that may in some cases be phased to increase TWTA power and efficiency.[4] A lowpass filter was used to prevent harmonics from affecting carrier power measurements in these tests.

Interestingly, it was found that for a single-carrier QPSK modulated signal, the addition of the limiter had a negligible impact on the saturated power and L/TWTA-induced spectral regrowth (SR). Even very close to saturation, the advantage of adding a limiter to improve SR appears to be negligible. This result is likely an outcome of the relatively small amplitude ripple displayed by single-carrier QPSK in comparison to multicarrier and other higher PEP digitally modulated signals.

In general, the greater the number of carriers, the greater the advantage of adding a limiter. ***Table 1*** lists the improvement in $\Delta OPBO_{SAT}$ achieved by adding a limiter to a TWTA and L/TWTA for different forms of excitation. ***Figure 6*** shows the enhancement in C/I near saturation provided by the addition of a limiter to a L/TWTA for two- and four-tone signals. ***Figure 7*** shows the enhance-

[Continued on page 134]

# Why accept second best? We don't.

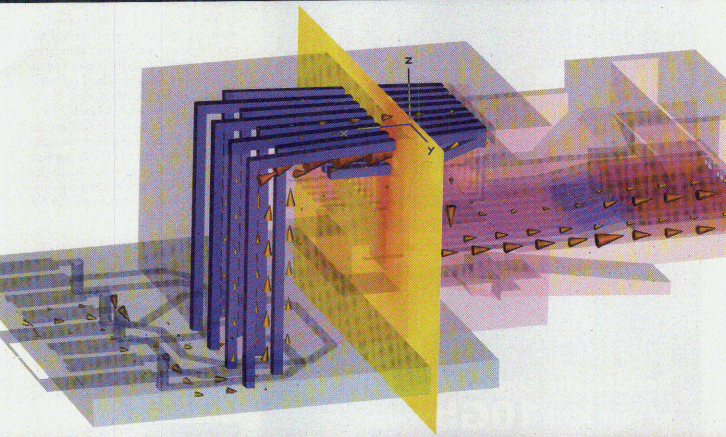


3D EM Simulation

→ Actually we have only modest needs. For example, bad quality is something we can't accept. This attitude ensures our technical leadership in the field of 3D EM simulation: The incorporation of the Perfect Boundary Approximation™ (PBA) technique allows an accurate modeling of curved surfaces while maintaining the unparalleled performance of the FI method in the time domain.
The applications of **CST MICROWAVE STUDIO™** include the simulation of waveguides, couplers, filters, power splitters, multiplexers, switches, planar structures, coax and multipin connectors, MMIC packages, all kinds of antennas, and many other structures.

**CST**
COMPUTER SIMULATION TECHNOLOGY

**CST. CHANGING THE STANDARDS.**
CST of America, Inc. · Cambridge, Massachusetts · **http://www.cst-america.com**
To request literature or a free demo CD, **617-576-5857**, or **info@cst-america.com**

ment for an infinite-tone signal (NPR). The two- and four-tone C/I values shown are based on the highest individual IMD term.[1] In the case of the NPR data, the equivalent carrier power cannot be measured directly because of the inability to separate the IMD from signal (noise) power. Consequently, the signal power was estimated from the NPR level and total noise power.

## CONCLUSION

The use of a limiter in conjunction with a L/TWTA (and some SSPAs) can increase multitone saturated power from 1 to 2 dB, depending on the number of carriers and postsaturation transfer characteristics. It can also provide several decibels of C/I improvement near saturation (at OPBO < 3 dB). However, the addition of a limiter to a L/TWTA appears too be of little or no value for single-carrier QPSK modulated signals, where no significant reduction in SR was observed. ■





CIRCLE 117 ON READER SERVICE CARD




CIRCLE 125 ON READER SERVICE CARD


### References


1. A. Katz, "TWTA Linearization," *Microwave Journal*, Vol. 39, No. 4, April 1996, pp. 839–843.
2. "SSPA Linearization," *Microwave Journal*, Vol. 42, No. 4, April 1999, pp. 22–44.
3. G. Satoh and T. Mizuno, "Impact of a New TWTA Linearizer upon QPSK/TDMA Transmission Performance," *IEEE Journal on Selected Areas in Communications*, Vol. SAC-1, No. 1, January 1983, pp. 39–45.
4. A.S. Gilman, *Principles of Traveling Wave Tube Amplifiers*, Artech House, Norwood, MA, 1994, pp. 324–325.




**Allen Katz** *is a professor of electrical engineering at The College of New Jersey and founder and president of Linearizer Technology Inc. He has more than 25 years of experience in the microwave and satellite industries. His work spans the frequency range from UHF through Ka band and has involved both hybrid and MMIC circuits, including the design of the first practical MMIC linearizer. Katz holds 14 patents and has written more than 50 technical publications. He is an IEEE Fellow as well as a member of the Eta Kappa Nu, Tau Beta Pi and Phi Kappa Phi Honor Societies.*

CHECK OUT THE NEW LEADNET™ READER SERVICE INFORMATION SYSTEM AT WWW.MWJOURNAL.COM AND GET THE INFORMATION YOU WANT FASTER.

# ACE YOUR TEST

## WITH A TOTAL INTERGRATED SYSTEM SOLUTION

# FROM DOW-KEY

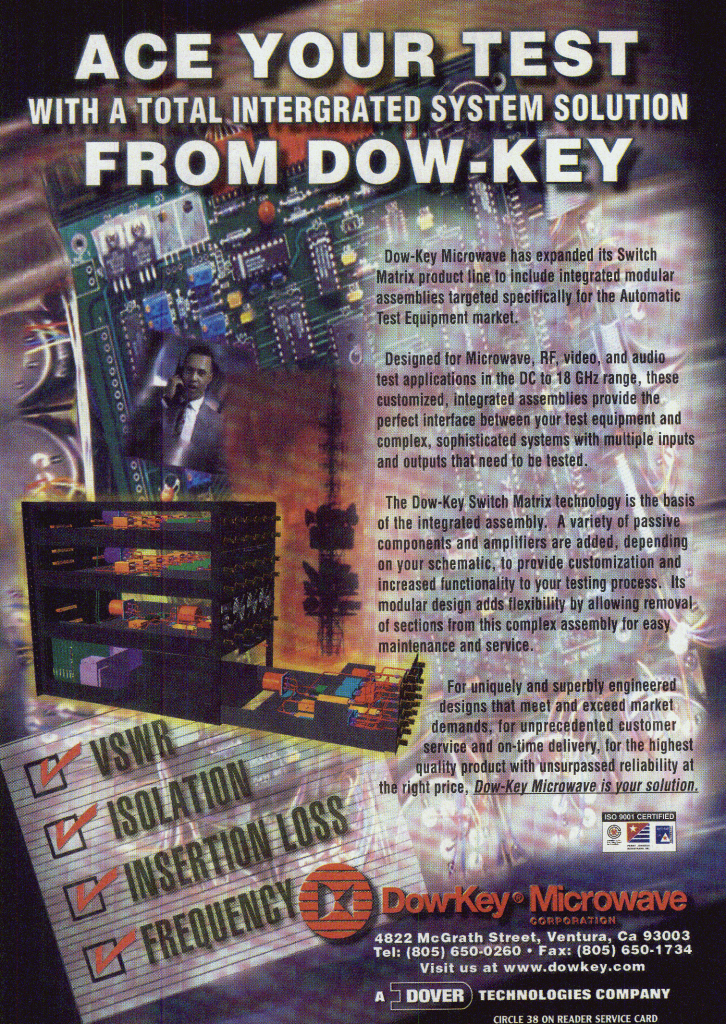

Dow-Key Microwave has expanded its Switch Matrix product line to include integrated modular assemblies targeted specifically for the Automatic Test Equipment market.

Designed for Microwave, RF, video, and audio test applications in the DC to 18 GHz range, these customized, integrated assemblies provide the perfect interface between your test equipment and complex, sophisticated systems with multiple inputs and outputs that need to be tested.

The Dow-Key Switch Matrix technology is the basis of the integrated assembly. A variety of passive components and amplifiers are added, depending on your schematic, to provide customization and increased functionality to your testing process. Its modular design adds flexibility by allowing removal of sections from this complex assembly for easy maintenance and service.

For uniquely and superbly engineered designs that meet and exceed market demands, for unprecedented customer service and on-time delivery, for the highest quality product with unsurpassed reliability at the right price, *Dow-Key Microwave is your solution.*

ISO 9001 CERTIFIED

- VSWR
- ISOLATION
- INSERTION LOSS
- FREQUENCY

**Dow-Key® Microwave**
CORPORATION

4822 McGrath Street, Ventura, Ca 93003
Tel: (805) 650-0260 • Fax: (805) 650-1734
Visit us at www.dowkey.com

A DOVER TECHNOLOGIES COMPANY

CIRCLE 38 ON READER SERVICE CARD




# A Low Loss Dielectric Resonator Filter for Cellular and PCS Applications

Because of the growing need for increased capacity in cellular and PCS networks, low insertion loss and high out-of-band rejection are critical parameters for service providers to deliver cost-effective coverage. The use of complex digital modulation schemes to increase capacity also requires that a transmit filter exhibit a wide dynamic range; that is, it must be capable of handling moderate to high power levels while simultaneously maintaining high near-band rejection. Dielectric resonator filters are attractive for their low passband insertion loss. Through careful design and fabrication, a dielectric resonator filter has been designed that is capable of achieving very low passband insertion loss and high near-band rejection.

At present, three types of bandpass filters are typically employed in cellular, PCS and satellite communications base stations: combline cavity/waveguide, high temperature superconducting (HTS) and dielectric resonator. Combline cavity filters are the most widely used in cellular base stations because they are relatively inexpensive and easy to manufacture. At cellular frequencies, these filters are capable of achieving unloaded quality factors (Q) between 2000 and 9000. The high unloaded Qs translate into highly selective frequency responses with low passband insertion loss and high rejection. Combline cavity filters, with fractional bandwidths of 0.5 to five percent (typ), exhibit typical insertion losses of 1 dB or less at cellular frequencies with out-of-band rejection of better than 60 dB and spurious performance of –60 dBc or better. Depending on the filter size and housing, it is not uncommon for a combline cavity filter to handle input power levels of 500 W (avg). Although a waveguide filter can be used for those applications requiring extremely low passband insertion loss, combline cavity filters can be housed in smaller enclosures (as increasingly required for PCS and microcellular applications).

HTS filters have been used for several years at both cellular and PCS frequencies. Fabricated with superconducting films on special substrates rather than with conventional metal conductors on ceramic or polytetrafluoroethylene (PTFE) substrates, these filters are capable of unloaded Qs exceeding 30,000. Originally developed by IBM for possible use in supercomputers, superconductors initially required extremely cold temperatures (typically the 4.2 K temperature of liquid helium) to achieve proper operation. Below a certain critical temperature ($T_c$) the resistance of a superconductor approaches zero. However, above that temperature, the resistance of the

[Continued on page 138]

TRILITHIC
*Indianapolis, IN*




At Trilithic, our engineers are thinking all the time. One of the things we've been thinking about lately is how to utilize recent advances in ceramic technology and its significant power handling capabilities. We thought it might be interesting to apply this technology to our advanced filter product line. Offering superior insertion loss and suppression performance, the Trilithic dielectric resonator filter configuration offers a variety of advantages. RF design engineers will now enjoy greater flexibility in meeting demanding spectral purity and interference requirements for specialized wireless communication systems. The result is an outstanding filter implementation, offering cryogenic performance for insertion loss and signal suppression even at high power levels at room temperatures (patent applied for). This technological creativity may seem alien to some. But then again, at Trilithic, we see the world a little differently.



**Call 1-800-TRILITHIC for more information & don't forget to ask for your free catalog.**

TRILITHIC

Hard Working Engineers–Like You

9202 East 33rd Street / Indianapolis, IN 46235

800TRILITHIC (800-874-5484) (317)895-3600 (317)895-3612 Fax

E-Mail: sales@trilithic.com / Internet:www.trilithic.com

superconductor tends to be even higher than that of conventional room-temperature conductors.

In recent years, improvements in HTS materials have made it possible for high performance HTS bandpass filters to operate at temperatures equal to that of liquid nitrogen (77 K) or higher using solid-state cryocoolers to maintain the critical temperature. Because of the limitations of HTS films for handling high current densities, the power-handling capabilities of HTS filters are generally confined to receiver applications. HTS bandpass filters are capable of impressive selectivity performance since their dielectric losses can be reduced to negligible levels by the use of low loss, single-crystal substrates.[1] Packaging losses and spurious coupling must be controlled; nonetheless, HTS bandpass filters have been realized with out-of-band rejection of better than 40 dB at cellular frequencies, spurious performance approaching –100 dBc and passband insertion loss of less than 0.5 dB. For receiver applications, HTS bandpass filters offer the best electrical performance of the three filter types with unloaded Qs approaching 50,000. These filters can be designed with fractional bandwidths ranging from 0.1 to two percent, although the power-handling capability is typically limited to a maximum of 25 W average power.

Dielectric resonator filters are constructed of resonators comprising cylindrical rods or tubes of dielectric material usually mounted on a dielectric substrate in the proximity of supporting microstrip circuitry. The size of the dielectric structure relative to the wavelength of the signal of interest determines the frequency coverage. As the number of resonators (or poles) in the filter increases, the skirts of the filter's frequency response become steeper and the out-of-band rejection increases. However, the passband insertion loss also increases with the number of resonators, especially in narrowband designs.

In a dielectric resonator, the EM field for a resonant mode is largely confined to the ceramic resonator material. The field strength outside the resonator falls off rapidly (approximately exponentially) at distances much shorter than the free-space wavelength of the resonator. The primary loss mechanism in a dielectric resonator is the friction loss of the electronic dipoles at each lattice of the dielectric material and is characterized by the dielectric resonator's loss tangent. Nevertheless, dielectric materials are currently available with unloaded Qs of several thousand for resonator frequencies up to and exceeding 20 GHz.

The new low loss dielectric resonator filter developed for cellular and PCS applications employs careful materials selection and circuit matching to achieve electrical performance approaching that of HTS filters, but without their power-handling limitations. With unloaded Qs between 5000 and 50,000, these dielectric resonator filters can be fabricated with fractional bandwidths between 0.1 and two percent at cellular and PCS frequencies.

*[Continued on page 140]*

JSM Electronics Inc.

PROVIDING INTERCONNECT SOLUTIONS

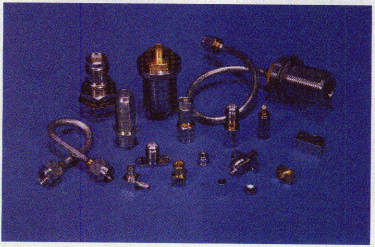

➢ From GPPO™ to 7/16 and every type in between — JSM Electronics stocks: SV Microwave, Telegärtner, Radiall & Gilbert Engineering.

➢ From RG-6 to RG-405 JSM Electronics stocks: EZ Form Cable & Belden.

➢ JSM Electronics also stocks: Fixed Attenuators GPO™, SMA and N Types, Terminations–GPO™, SMA and N Types, Adapters-In-Series and Between Series, Cable Assemblies–6" increments

980 NORTH COUNTY ROAD 427
LONGWOOD, FLORIDA 32750

PHONE: 888-FONEJSM
FAX: 407-831-0087

# All VCOs should be this good . . .



*Setting the standard for VCO performance.*

Designing today's advanced radios is tough enough when you have VCOs that don't give you the margin you need. Our CLV line of patented ultra-low noise VCOs will give you that margin ... and more!

| Part No: | Freq. Range: | $V_{tune}$ | $\Phi_n$ at 10kHz | $V_{supply}$ |
|---|---|---|---|---|
| CLV0769E | 734-804 | 1-4 | -112 | 5 |
| CLV0815E | 806-824 | 0.5-4.5 | -113 | 5 |
| CLV0945E | 936-953 | 0.5-4.5 | -114 | 5 |
| CLV1320E | 1295-1335 | 1-5 | -113 | 5 |
| CLV1525E | 1500-1550 | 0.3-4.7 | -110 | 5 |

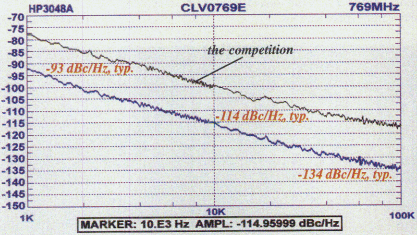


Learn more about Z-COMM's CLV product line by visiting our web site at http://www.zcomm.com/ for datasheets, outline drawings, tape and reel specifications, and application notes, as well as our complete product catalog and custom VCO inquiry form.

**Come to the source ... Z-COMM.**

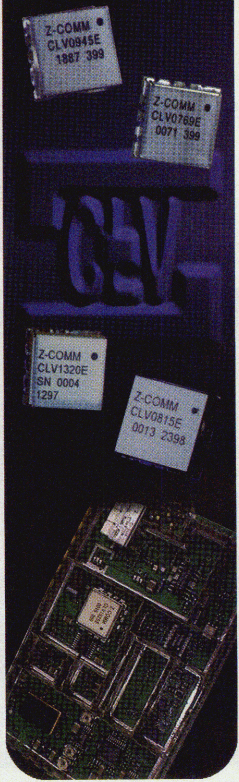



**Z-Communications, Inc.**
9939 Via Pasar • San Diego, CA 92126
(619) 621-2700 • Fax: (619) 621-2722
WWW: http://www.zcomm.com/


CIRCLE 179 ON READER SERVICE CARD




▲ *Fig. 1 The dielectric filter's frequency response.*

The new filters are designed for typical operating temperatures of –55° to +80°C and can handle average power levels exceeding 1 kW at room temperature. The measured insertion loss at 1900 MHz is less than 0.8 dB, as shown in ***Figure 1***, with rejection of better than 60 dB at 40 MHz from the carrier and spurious levels exceeding –100 dBc. A filter fabricated with 1.5 kW average power-handling capability at PCS frequencies exhibits a 3-to-60-dB shape factor of 1.4:1 and a fractional bandwidth of 0.2 percent, making it ideal for both receiver and transmitter applications. ***Table 1*** lists the dielectric resonator filter specifications.

**TABLE I**

**DIELECTRIC RESONATOR FILTER SPECIFICATIONS**

| | |
|---|---|
| Passband frequency (MHz) | 2300 |
| Bandwidth (%) | 0.2 |
| Passband insertion loss (dB) | 0.8 |
| Stopband rejection (dB) | 60 |
| Spurious levels (dBc) | –100 |
| Power-handling capability (avg) (kW) | 1.5 |
| Operating temperature range (°C) | –55 to +80 |
| Size (") | 13 × 7 × 3 |
| Weight (lb) | < 10 |

These dielectric resonator filters offer the performance of HTS filters with enhanced power-handling capability at a fraction of the cost. They are comparable in size to combline cavity filters and considerably smaller than HTS filters with the low insertion loss and high near-band rejection required by modern communications systems based on complex digital modulation schemes such as wideband code division multiple access. Additional information is available at the company's Web site at www.trilithic.com or via e-mail at sales@trilithic.com.

## References

1. Theodore Van Duzer and Charles W. Turner, *Principles of Superconductive Devices and Circuits*, Second Edition, Prentice-Hall, Upper Saddle River, NJ, 1999, pp. 150–151.
2. Charles A. Harper, *Passive Electronic Component Handbook*, Second Edition, McGraw-Hill, New York, 1997, pp. 556–561.

**Trilithic,**
**Indianapolis, IN (800) 344-2412**
**or (317) 895-3600.**

***Circle No. 302***



# FILTERS

## low pass, high pass, bandpass dc-3GHz from $11.45

• less than 1dB insertion loss • greater than 40dB stopband rejection • surface mount • BNC, Type N, SMA available
• 5-section, 30dB/octave rolloff • VSWR less than 1.7(typ.) • rugged hermetically sealed pin models • constant phase
• meets MIL-STD-202 tests • over 100 off-the-shelf models • immediate delivery



Mini-Circuits®

P.O Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718)332-4661 *INTERNET* http://www.minicircuits.com
For detailed specs on all Mini-Circuits products refer to • 760- pg. HANDBOOK • INTERNET • THOMAS REGISTER • MICROWAVE PRODUCT DATA DIRECTORY • EEM

US 100 INT'L 101
CIRCLE READER SERVICE CARD

# CATALOG UPDATE




### ▲ Precision RF and Microwave Component Catalog

This 40-page catalog details instrumentation-grade adapters, precision attenuators and terminations, and high return loss connectors as well as the K Connector® which offers coverage up to 40 GHz. Measurement components are also featured. Product photographs, specifications and application notes are provided.

***Anritsu Co., Microwave Measurement Division, Morgan Hill, CA (800) 267-4878.***

***Circle No. 310***




### ▲ Satellite Communications Component Brochure

This brochure highlights the company's output assemblies, filters, couplers, diplexers and multiplexers, circulators and isolators, terminations, switching and combining networks, and monitor and control systems. Customer service, support and partnership agreements also are discussed.

***Apollo Microwaves, Pointe-Claire, Quebec, Canada (514) 426-5959.***

***Circle No. 311***




### ▲ Waveform Generator Catalog

This 113-page catalog provides information on samplers, laser diode drivers, constant current pulsers, frequency dividers, transformers, power splitters, bias insertion units, scope probes and low impedance cables as well as pulse, impulse, monocycle, delay and function generators and pulse, CW and transimpedance amplifiers. Application notes, photographs and key specifications are included.

***Avtech Electrosystems Ltd., Ottawa, Ontario, Canada (800) 265-6681 or (613) 226-5772.***

***Circle No. 312***




### ▲ Aluminum Nitride Catalog

This catalog introduces Hi-Therm™ aluminum nitride, a high purity ceramic with superior microstructural and chemical uniformity that results in very consistent properties. Hi-Therm is best suited for heat sink, power transistor module, high frequency device and laser diode submount applications. Key specifications and a thermal conductivity graph are provided.

***Carborundum Corp., Sanborn, NY (716) 731-9200.***

***Circle No. 313***




### ▲ Digital Broadband Catalog

This six-page brochure contains information on the company's mixed-signal test sets, arbitrary waveform generators and digital vector generators, analog and digital recorders, microwave and RF distortion measurement test sets, and broadband signal analyzers. Key specifications also are included.

***Celerity Systems, a division of L-3 Communications, Cupertino, CA (888) 274-5604.***

***Circle No. 314***




### ▲ Vacuum Electron Device Catalog

This brochure contains information on the company's standard communication vacuum electron devices and traveling-wave tube products for satellite communication uplink amplifiers. A cross-reference guide is provided. Key specifications and graphs also are included.

***Communications & Power Industries (CPI), Palo Alto, CA (650) 846-3900.***

***Circle No. 315***

# AT AML, SIZE REALLY DOESN'T MATTER.

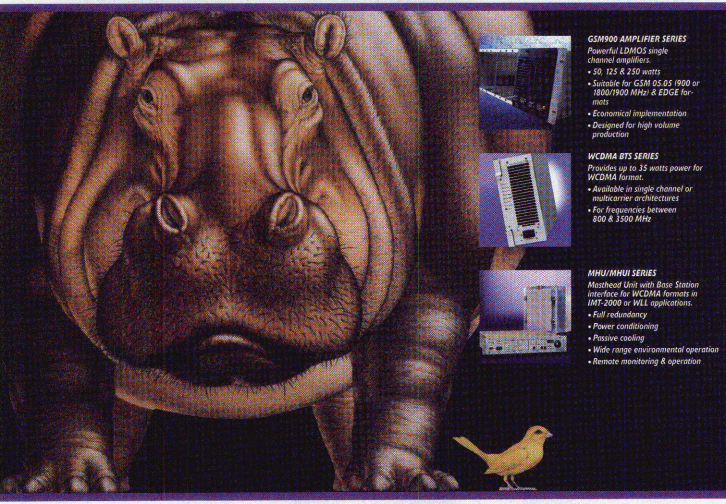

**GSM900 AMPLIFIER SERIES**
*Powerful LDMOS single channel amplifiers.*
- *50, 125 & 250 watts*
- *Suitable for GSM 05.05 (900 or 1800/1900 MHz) & EDGE formats*
- *Economical implementation*
- *Designed for high volume production*

**WCDMA BTS SERIES**
*Provides up to 35 watts power for WCDMA format.*
- *Available in single channel or multicarrier architectures*
- *For frequencies between 800 & 3500 MHz*

**MHU/MHUI SERIES**
*Masthead Unit with Base Station Interface for WCDMA formats in IMT-2000 or WLL applications.*
- *Full redundancy*
- *Power conditioning*
- *Passive cooling*
- *Wide range environmental operation*
- *Remote monitoring & operation*

## We have the capacity to handle product volume & design complexity requirements of any dimension... at astonishing speed.

AML Communications has an announcement of significant proportions. We are now re-engineered and specially equipped to accommodate the varying wireless production requirements of OEMs. By combining effective MRP with lean manufacturing techniques and unmatched technological innovation, we have the flexibility to handle custom and standard product runs . . . low and high volume run rates . . . and uneven delivery requirements. Partnering with AML Communications gives you the freedom to be highly responsive to continually changing market requirements. Plus you'll have the assurance of dealing with an ISO 9001 certified company.

ANSI-RAB QMS ACCREDITED ISO 9001 CERTIFIED

Whether your requirements are big or small – from a first article pilot run to large volume production – we're ready when you are.

Ask for our white paper, *Lean Manufacturing Optimized for Wireless Amplifier Production.* 805.388.1345
www.amlj.com • e-mail: sales@amlj.com

AML Communications

# CATALOG UPDATE




### ▲ RF and Electronic Specialist Brochure

This brochure provides information on the company's three divisions: RF Products, which manufactures adapters, connectors and cable assemblies; Fiber Optic, which supplies connectors, custom patchcords and accessories; and Distribution, which offers supply management, kitting, purchasing and stocking. A listing of products is included.

***Delaire USA,***
***Manasquan, NJ (732) 528-4520.***

**Circle No. 316**




### ▲ Product Reference Guide

This eight-page brochure describes RF and microwave silicon power transistors, transponders, cellular base stations and emitters for PCS/cellular, broadcast, SATCOM and radar applications. The company's capabilities in product design, wafer and die fabrication, assembly and test are discussed. A CD-ROM also is included.

***GHz Technology Inc.,***
***Santa Clara, CA (408) 986-8031.***

**Circle No. 317**




### ▲ Signal Processing Product Catalog

This 18-page catalog describes the company's analog-to-digital converters, function-specific digital signal processing and digital radios, RS-232 interface circuits, analog switches, RF building blocks transistor arrays and linear operation amplifiers. Key specifications and photographs are included.

***Intersil Corp.,***
***Melbourne, FL (888) 468-3774.***

**Circle No. 318**



### ▲ Microwave and RF Circuit Board Brochure

This six-page brochure describes the company's manufacturing capabilities in microwave and RF circuit board design as well as double-sided and multilayer PTFE laminates. Precision etching, chemical milling and drilling also are discussed.

***Micro-Chem Inc.,***
***Santa Clara, CA (408) 970-9777.***

**Circle No. 319**




### ▲ Telecommunication Solution Catalog

This 20-page catalog describes solutions for next-generation mobile phones; high performance, surface-mount diode technology; electrostatic effects on microchips and mitigation methods; personal digital assistants; and power management concepts for mobile phones. New products, application notes and a CD-ROM catalog are included.

***Microsemi Corp.,***
***Garden Grove, CA (800) 713-4113.***

**Circle No. 320**




### ▲ Filter and Diplexer Catalog

This 32-page catalog contains information on filters and diplexers from DC to 40 GHz, including L/C surface-mount and ceramic dielectric filters and cellular/GPS/PCS diplexers and filters. Key specifications, outline drawings and photographs are included.

***Microwave Circuits Inc.,***
***Washington, DC (800) 642-2587***
***or (202) 829-3030.***

**Circle No. 321**


everything you need to know about the RF/microwave industry...online
rfglobalnet.com gives people in the RF/microwave industry everything they need:
• Instant buying access to thousands of vendors and suppliers the world over
• Unlimited sales opportunities through customized Storefronts, E-Commerce Centers and other services
• Links to the world's largest business-to-business marketplace for electronics: NECX
www.rfglobalnet.com
• Breaking news—including regulatory info—and the latest technology
• Hot job postings and career opportunities
• And much, much more!
All delivered on time, on target, and totally FREE. Become a part of the online community that's 100% focused on the RF/microwave industry.
CIRCLE 137 ON READER SERVICE CARD
VerticalNet™
Leading Business to E-Business
© 10 E3030 MRU



Quality & Dependability

**VCO'S**

**0.2" x 0.2" x 0.075"**

**Super miniature VCO'S for existing and emerging wireless applications.**

- Over 300 standard models.
- 29 package styles to select from.
- No setup charges for custom VCO'S.
- Available on tape and reel.



Volume Production

**Modco, Inc.** offers a complete line of Voltage Controlled Oscillators, from 5 MHz to 7 GHz *at very low* competitive prices. Call the VCO hotline toll free at 1-800-672-4552.

**www.modcoinc.com**

*Modco, Inc.*

VCO'S For Wireless Communication

808 Packer Way - Sparks, Nevada 89431
Phone (775) 331-2442
Fax (775) 331-6266
Sales 1-800-672-4552
E-mail: sales@modcoinc.com
http://www.modcoinc.com


# CATALOG UPDATE




### ▲ High Volume Interconnect Solution Design Guide

This new design guide outlines an available toolkit for the design of cost-effective, high volume interconnect solutions. Substrate properties, standard metallization, solder mask and insulator parameters, and thick-film cross-under design parameters are provided. Capabilities and specifications are included.

***MIC Technology, an Aeroflex company, North Andover, MA (800) 746-4642 or (978) 687-9625.***

***Circle No. 322***




### ▲ Precision RF/Microwave Component Catalog

This 152-page catalog details power dividers, couplers, detectors, hybrids, adapters, terminations, attenuators, filters, isolators and circulators, oscillators, switches and amplifiers. Specifications and mechanical outlines are listed.

***Microwave Communications Laboratories Inc. (MCLI), St. Petersburg, FL (727) 344-6254.***

***Circle No. 338***




### ▲ Planar Scanner Brochure

The six-page brochure describes the company's MI-6900 planar scanners, which are designed to perform repeated measurements at critically accurate standards to match current and future RF and microwave measurement challenges. A custom scan area can be ordered to meet unique scanning requirements.

***Microwave Instrumentation Technologies LLC, Duluth, GA (800) 848-7921.***

***Circle No. 323***




### ▲ Component, Network and Instrument Catalog

This 648-page catalog contains information on couplers, power combiners and dividers, attenuators and terminations, adapters, stocked and matrix switches, hybrids, phase shifters, waveguide components, custom passive products, GaAs amplifiers, oscillators, and instruments and monitors. Product photographs and outline drawings are provided.

***Narda Microwave-East, a division of L-3 Communications, Hauppauge, NY (631) 231-1700.***

***Circle No. 324***

# Practice is over...

# it's time to perform.

In a modern era one company has been at the forefront of advanced electronics systems for the defense, aerospace, and communications industries: Zeta.

*Doing business for over 30 years!*

When your system calls for a level of performance that's beyond prevailing standards you need more than a product, you need a solution.

At Zeta we provide solutions that include a full range of microwave products and subsystems specifically designed for use in missile guidance, ground support equipment, radar, satellite communications, data links and other demanding applications. Our customers include United States government agencies, foreign governments, as well as major military and commercial contractors.

So, when you are called on to perform, place your trust in a name you know . . . Zeta.

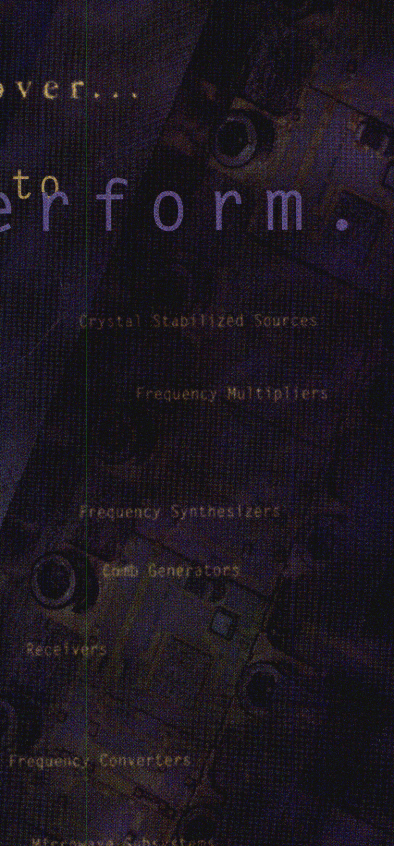


ZETA

an Integrated Defense Technologies Company

2811 Orchard Parkway • San Jose, CA 95134 • Phone 408.434.3600 • Fax 408.433.0205
http://www.zeta-idt.com • E-mail zeta@zeta-idt.com

*Building a brighter future in Communications with Limiters for protection from High Power Threats*



SMA Connectors and Mounting Holes



Type N Connectors Self Supporting

**L**imiters from Advanced Control Components are designed and built to handle higher power demands than any other available in the marketplace today!

Whether the application is Cellular/PCS, Military or Commercial... *Reliability* is our key ingredient in every component.

Contact one of our sales representatives with your specifications.

**Advanced Control Components**

20 Meridian Road, Eatontown, NJ 07724, U.S.A.

732/460-9212 FAX: 732/460-9214 www.advanced-control.com

# CATALOG UPDATE







### ▲ 2000 Measurement and Automation Catalog

This 880-page catalog features products for computer-based measurement and automation, including digitizers and oscilloscopes, digital multimeters, switches, waveform generators, dynamic signal analyzers, and temperature and voltage loggers. Tips are provided on how to build a system and select hardware/software as well as measurement and OEM solutions.
***National Instruments, Austin, TX (512) 794-0100.***
**Circle No. 325**

### ▲ Filter and Crystal Catalog

This 32-page catalog highlights LC, crystal, lumped element and dielectric resonator design products, including crystals, TCXOs and voltage-controlled TCXOs that cover the 450 kHz to 3 GHz frequency range. Products are offered in surface-mount and through-hole packages. Key specifications are included.
***Networks International Corp. (NIC), Overland Park, KS (913) 685-3400.***
**Circle No. 326**







### ▲ VCO Short-form Catalog

This four-page short-form catalog introduces the company's low noise 5 and 3 V VCOs, which offer –112 dBc/Hz at 10 kHz offset.
***Princeton Electronic Systems Inc. (PES), Princeton, NJ (609) 275-6500.***
**Circle No. 327**

### ▲ Product Catalog

This catalog provides information on cavity filters, duplexers, isolators and loads, and receive equipment and transmit combiners. Photographs, key specifications and ordering information also are included.
***REMEC, WACOM Products Inc., Waco, TX (254) 848-4435.***
**Circle No. 328**


"How about a **wideband VCO** for a cable modem project?"




**Try the V585ME05 from Z-COMM.**

| Frequency | Output Power |
|---|---|
| 1100-1900 MHz | 6.5±2.5 dBm |
| **Phase Noise 10kHz** | **Vtune** |
| -102 dBc/Hz | 0.8-20 V |
| **Sensitivity** | **Package** |
| 65 MHz/V | MINI-14S |

**Come to the source ... Z-COMM.**

Z-Communications, Inc.
9939 Via Pasar
San Diego, CA 92126
(619) 621-2700 • Fax (619) 621-2722
http://www.zcomm.com/solutions.html

CIRCLE 180

# Plain And Simple Fact .....

## High Q RF Capacitors Without The High Cost For Todays Consumer Driven RF / Microwave Wireless Designs

| Vendor: A | TEMEX COMPONENTS |
|---|---|
| Part Type : 100A | Part Type: CHA |
| Price @10pcs $ 1.83 | Price @10pcs $ 1.09 |
| Price @100pcs $ 1.23 | Price @100pcs $ 0.79 |
| Price @1,000pcs $ 0.66 | Price @1,000pcs $ 0.48 |
| Price @10,000pcs $ 0.46 | Price @10,000pcs $ 0.32 |

| Vendor: A | TEMEX COMPONENTS |
|---|---|
| Part Type : 100B | Part Type: CHB |
| Price @10pcs $ 2.19 | Price @10pcs $ 1.49 |
| Price @100pcs $ 1.62 | Price @100pcs $ 1.21 |
| Price @1000pcs $ 1.06 | Price @1,000pcs $ 0.82 |
| Price @10,000pcs $ 0.79 | Price @10,000pcs $ 0.54 |

## The Other Leading RF Amplifier Companies Have Already Made The Switch To TEMEX Components .....

## So What Are You Waiting For ?

**Call Today Toll Free In The USA And Canada**
**( 888 ) 588-3800**
**On The Web : http://www.hdcom.com/rfcaps.html**

**NEW** 0505 And 0603 High Q Series Products Now Also Available For Low Cost High Volume Applications

HD Communications Corp.
Connecting The Wireless World

HD Communications Corp.
Components Group
1 Comac Loop Ronkonkoma, N. Y.
11779

Partnership RF / Microwave
Technical Sales And Distribution

TEMEX COMPONENTS

Available From Stock In North And South America • Tel. ( 631 ) 588-3877 • Fax. ( 631 ) 588-3879

CIRCLE 50 ON READER SERVICE CARD

# CATALOG UPDATE




### ▲ RF and Microwave Device Catalog

This six-page brochure contains information on RF and microwave devices, power semiconductors and related components, including amplifiers, attenuators, up- and downconverters, interconnect and passive devices, and capacitors. Customer service and support capabilities also are discussed.

***Richardson Electronics,***
***LaFox, IL (800) 348-5580***
***or (630) 208-2200.***

**Circle No. 329**




### ▲ RF/Microwave and Fiber-optic Technology Catalog

This four-page catalog describes the company's manufacturing capabilities in small-signal components, RF power devices, RF/IF passives and interconnects, and fiber-optic components. Value-added services, including parametric testing, tape-and-reeling, solder dipping, screening and special cabling, are described.

***RF Vision,***
***Santa Clara, CA (877) 450-4441.***

**Circle No. 330**




### ▲ Short-form Catalog

The short-form catalog features high performance SMA, extended power SMA and 2.92 mm connectors for microstrip and stripline circuits up to 40 GHz. The low loss connectors are rugged enough to withstand severe environmental conditions such as high temperatures. All of the company's products are available off the shelf.

***Southwest Microwave Inc.,***
***Microwave Products Division,***
***Tempe, AZ (480) 783-0201.***

**Circle No. 331**




### ▲ RF and IF Signal Processing Capability Catalog

This eight-page catalog features IQ modulators and demodulators, voltage-variable phase shifters and attenuators, high dynamic range mixers, power splitters and combiners, and directional couplers. A listing of model numbers and key specifications is provided.

***SV Microwave,***
***Commercial Products Group,***
***Largo, FL (727) 541-5800.***

**Circle No. 332**


"Or a super low noise VCO for CDMA/TDMA?"




How about the CLV0769E You guessed it: from Z-COMM.

| Frequency | Output Power |
|---|---|
| 734-804 MHz | 2.5±2.5 dBm |
| **Phase Noise 10kHz** | **Vtune** |
| -112 dBc/Hz | 1-4 V |
| **Sensitivity** | **Package** |
| 40 MHz/V | MINI-16 |

Come to the source ... Z-COMM.

Z-Communications, Inc.
9939 Via Pasar
San Diego, CA 92126
(619) 621-2700 • Fax (619) 621-2722
http://www.zcomm.com/solutions.html

CIRCLE 181

# MICROWAVE SOLUTIONS
## Stocked Amplifiers

**Microwave Solutions is now offering the following amplifiers as stocked products. Same day shipment on orders received by 5PM EST, upon credit approval.**

**FEATURES:**
- ⇒ Voltage Regulation
- ⇒ Reverse Polarity Protection
- ⇒ RF Open/Short Circuit Protection
- ⇒ Unconditionally Stable
- ⇒ Competitive Pricing
- ⇒ Quick Delivery

**APPLICATIONS:**
- ⇒ Test and Setup Systems
- ⇒ Satellite Tracking
- ⇒ VSAT & ELI Systems
- ⇒ Radar or Point-to-Point Terrestrial
- ⇒ Communication Systems



| Model: | MSH-4573301-DI | MSH-5455402-DI |
|---|---|---|
| Freq.: | 2.0-6.0GHz | 4.0-8.0GHz |
| Gain: | 32.0dB min. | 26.0dB min. |
| N.F.: | 3.5dB max. 2.0 dB Typ. | 6.0 dB max. |
| Pout: | +12.0dBm min. | +20.0dBm min. |
| VSWR: | 2.0:1/2.0:1 | 2.0:1/2.0:1 |
| DC Pwr.: | +12VDC@150mA | +12 VDC@150mA |

| Model: | MSH-6343408-DI | MSH-7264401-DI |
|---|---|---|
| Freq.: | 8.0-12.0GHz | 8.0-18.0GHz |
| Gain: | 23.0dB min. | 16.0dB min. |
| N.F.: | 3.0dB max. 2.0dB Typ. | 5.0dB max. 3.5dB Typ. |
| Pout: | +18.0dBm min. | +16.0dBm min. |
| VSWR: | 2.0:1/2.0:1 | 2.0:1/2.0:1 |
| DC Pwr.: | +12 VDC@150mA | +12VDC@130mA |

| Model: | MSH-6546602 | MSD-3488601-TTL |
|---|---|---|
| Freq.: | 8.0-12.0GHz | .05-3.0GHz |
| Gain: | 34.0dB min. | 30.0dB min. |
| N.F.: | 4.0dB max. 3.0dB Typ. | 10.0dB max. |
| Pout: | +30.0dBm min. | +30.0dBm min. |
| VSWR: | 2.0:1/2.0:1 | 2.0:1/2.0:1 |
| DC Pwr.: | +15 VDC@1.13A | +15 VDC@1.0A |

⇒ Pout is measured at 1dB Compression Point.



To compete in today's Global market, MSI continues to offer affordable, highly reliable, military and commercial state-of-the-art-amplifiers. Today, our mission remains the same - To supply the highest quality microwave components at the lowest possible price.

Call us with your order today!

**Microwave Solutions, Inc.**
National City, CA 91950
1-800-9MSI-AMP Fax: (619) 474-7003
e-mail: sales@microwavesolutions.com
http://www.microwavesolutions.com


# CATALOG UPDATE




### ▲ Plenum Cable Catalog

This 20-page catalog covers the LMR® LLPL high performance, 50 Ω, low loss, flexible plenum coaxial cables, connectors, accessories and tools designed for indoor use in wireless systems. Technical information and specifications are provided.

*Times Microwave Systems,*
*Wallingford, CT (203) 949-8489.*

**Circle No. 333**




### ▲ Satellite Component and Integrated Microwave Assembly Brochure

This eight-page catalog highlights space-qualified ferrite circulators, isolators, waveguide switches and sources as well as high frequency synthesizers for the wireless communications and defense industries. An overview of the company's manufacturing capabilities and divisions is included.

*TRAK Communications Inc.,*
*Tampa, FL (888) 283-8444.*

**Circle No. 334**




### ▲ Product Selection Guide

This four-page product selection guide describes high performance RF components and integrated assemblies including amplifiers, mixers and repeaters for today's communications. Specifications and a listing of sales offices and distributors are included.

*Watkins-Johnson Co. (WJ),*
*Palo Alto, CA (800) 951-4401.*

**Circle No. 335**




### ▲ Coaxial Cable, Connector and Accessory Catalog

This 36-page catalog contains information on HELIAX® coaxial cable, assemblies, connectors and accessories. Product photographs and specifications are provided. A company history and description of the Andrew Institute are also included.

*Andrew Corp.,*
*Orland Park, IL (708) 349-3300.*

**Circle No. 351**

# DEMANDING ENVIRONMENT?

## MITEQ OUTDOOR CONVERTERS

Available in S-, C-, Ku-, DBS- and Ka-Bands



The 100 Series of synthesized frequency converters is designed for both single and redundant operation in an outdoor environment. An internal synthesizer provides frequency tuning. All units are fully compliant with INTELSAT requirements IESS 308/309.

In addition to an RS422/485 remote monitor and control port, each unit has an RS232 local control port. A robust feature set is provided with the local control software that communicates with the converter via a COM port on an IBM compatible PC.

FEATURES:

- Compact outdoor unit
- Low phase noise
- Dual conversion
- Low intermodulation distortion
- No spectral inversion
- Simple control via RS232 remote
- Monitoring of the SSPA detected DC output level (upconverter only)
- Monitoring of the supplied LNA power (downconverter only)
- Simple installation
- Temperature compensated gain
- Separate up/down converter summary alarm outputs
- Remote reference oscillator adjust
- Time stamped alarm history
- System temperature monitor
- Rack-Mount System Controller
- Hand-Held Outdoor System Controller

For additional information or technical assistance, please contact Chris Alfenito at (631) 439-9108, fax (631) 436-7431, or e-mail <calfenito@miteq.com>

MITEQ

100 Davids Drive, Hauppauge NY 11788 USA
TEL: (631) 436-7400 • FAX: (631) 436-7431
note: new area code www.miteq.com

CIRCLE 112 ON READER SERVICE CARD

# CATALOG UPDATE




### ▲ Commercial Diode Catalog

This catalog describes new diodes designed specifically for high volume commercial applications, including abrupt, hyperabrupt and wideband varactors; voltage-controlled crystal oscillator and temperature-compensated crystal oscillator hyperabrupts; SMT PINs; mixers/detectors; and ceramic MELFs. These direct Alpha replacements are available in a variety of surface-mount or standard MELF packages on tape and reel.

***Micrometrics Inc.,***
***Londonderry, NH (603) 641-3800.***

**Circle No. 347**




### ▲ Automatic Distortion Measurement System Brochure

This eight-page brochure describes the model CTS-1000 automatic distortion measurement system, a turnkey system for making accurate, repeatable measurements of any cable telecommunications frequency plan in minutes without limitation. Features are described. Screen shots illustrating the system's capabilities are provided.

***RDL Inc.,***
***Conshohocken, PA (610) 825-3750.***

**Circle No. 353**




### ▲ High Frequency Circuit Material Portfolio

This product folder includes product data sheets, physical property guides, electrical design data and fabrication guidelines on the company's complete line of circuit board materials for wireless communications over high frequencies, including microwave and RF.

***Rogers Corp.,***
***Microwave Materials Division,***
***Chandler, AZ (480) 961-1382.***

**Circle No. 350**




### ▲ High Quality, Low Cost Ceramic-based Component Brochure

This eight-page brochure decribes dielectric and magnetic materials and RF/microwave components. Company capabilities, including applications engineering assistance and state-of-the-art processing, are detailed.

***Trans-Tech Inc.,***
***a subsidiary of Alpha Industries,***
***Adamstown, MD (301) 695-9400.***

**Circle No. 352**




### ▲ High Voltage Coaxial Connector Catalog

This 12-page catalog describes the LC series RF coaxial connectors used in high voltage, high power applications. The connectors are designed to meet the LC interface standard per MIL-STD-348 and MIL-C-3650. Detail drawings of cable plugs, jacks, bulkhead or panel receptacles, and in- and between-series adapters are included.

***Tru-Connector Corp.,***
***Peabody, MA (800) 262-9878***
***or (978) 532-0775.***

**Circle No. 349**




### ▲ Signal Switching and Distribution Subsystem Catalog

This catalog contains information on new notch filters for enhancing a receiver's dynamic range. Switch matrices feature a full fan out, nonblocking architecture and can be designed with more than 100 inputs/outputs in a single chassis.

***Signal Technology Corp.,***
***Systems Operation,***
***Webster, MA (508) 943-7440.***

**Circle No. 348**

M/A-COM
RF & Microwave Products

# We're Shaping the Future of Wireless

**Since its founding in 1950 M/A-COM has led the world in developing and manufacturing RF and microwave devices, components and subsystems for wireless communications.**

**The M/A-COM years have been an era of explosive growth and change in communications technologies. Yet, through these changing times, M/A-COM has remained at the cutting edge, offering its customers innovative and creative products that help them to keep pace with the communications revolution.**

**We've held our lead by investing substantially in research and development of new products, and by employing the industry's most advanced manufacturing techniques. We've learned that just developing and marketing products that set the industry standard for quality and innovation isn't enough. You've also got to offer great customer service, backed by design and manufacturing support.**

**With this proud history behind us, our commitments to innovation, quality and service and our faith in the future of wireless are stronger than ever. Today, M/A-COM is helping to shape the future by laying the foundations for global wireless communications for the next fifty years. With our unmatched resources in research, manufacturing and people, we're prepared to remain the leader in wireless well into the new century.**

**If your company is seeking innovative solutions in cellular telephony, wireless local area networking, telemetry, remote data gathering, wireless transmission, interactive CATV, vehicle sensors and mobile communications, M/A-COM is the place to look. We're helping to shape the future of wireless.**



M/A-COM, headquartered in Lowell, MA, is a leading supplier of radio frequency (RF), microwave and millimeter wave semiconductors, components and IP Networks to the wireless telecommunications and defense-related industries. M/A-COM's products include semiconductor devices, RF integrated circuits, passive control devices, antennas, subsystems and systems. Employing more than 2,800 people, M/A-COM has offices and manufacturing facilities worldwide.

CIRCLE 67 ON READER SERVICE CARD

www.macom.com

tyco / Electronics / M/A-COM



# HIGH PERFORMANCE, LOW COST, SURFACE-MOUNT MICROWAVE MIXERS

As communication bandwidth requirements increase, industry is demanding higher performance in passive devices as well as smaller footprints. Although attempts are being made to utilize semiconductor technologies, they are capital intensive and, hence, the selection is limited. Blue Cell™ technology lends itself to low cost mixer designs for moderate to high volume markets and utilizes standard thick-film technology. A series of high performance passive mixers has been developed that uses patented Blue Cell technology. Each mixer exhibits good conversion loss from 2.5 to 6.7 GHz with excellent LO-to-RF and LO-to-IF isolation. The finished part has an ultra-low height of 0.07" and its footprint measures 0.25" × 0.30".

## THE MIXER DESIGN

The design for the mixer series was accomplished using the HP Momentum 2.5D electromagnetic simulator; the nonlinear analysis was performed with HP Microwave Design System software. Because the grounding is through inductive leads, the actual high end performance of the mixer was slightly lower than the computer predicted. However, excellent performance was achieved with just one design iteration.

## ASSEMBLY DETAILS

The mixer is fabricated in multilayer thick film using materials and processes chosen to optimize their high electrical performance. Strict controls are placed on both the materials and the processes to ensure repeatable performance from part to part. The diodes are attached using automatic die attach and assembled using automatic wire bonders. The package consists of 10 leads attached to the substrate with high temperature melting point solder. The leads are solder plated, have good solderability and are shaped to provide strain relief to account for variations in the temperature coefficient between the host PCB and the mixer. A proprietary epoxy cure process has been used to protect the diodes and traces, ensuring a part rugged enough to withstand repeated high temperature reflows while maintaining good moisture resistance.

## PERFORMANCE

The model MBA-671 mixer operates from 2400 to 6700 MHz. Typical conversion loss is

*[Continued on page 158]*

BLUE CELL TECHNOLOGY,
A FAMILY MEMBER OF MINI-CIRCUITS
*Brooklyn, NY*

# BLUE CELL MIXERS

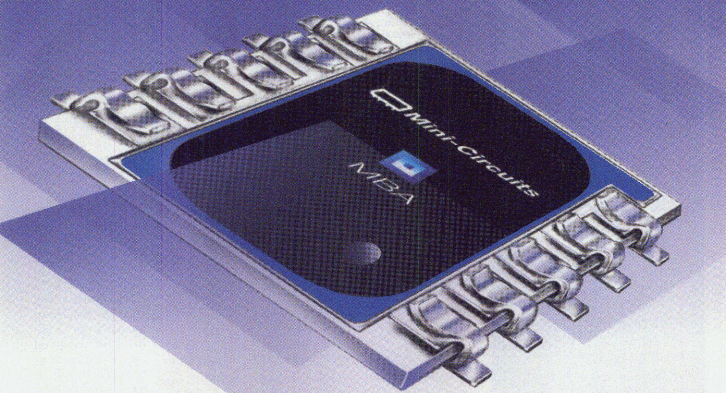


## 0.8 to 6.7GHz from $5.95 (10-49)

**•low conversion loss •thin profile •superb temperature stability •low cost**

Unleash extra performance from your higher frequency designs by upgrading now to Mini-Circuits level 0 to level 17 (LO) Blue Cell™ mixers. State-of-the-art automated manufacturing using multilayer thick film ceramic construction delivers superb temperature stability, low conversion loss, high repeatability, and very low cost per unit. This process also results in a phenomenally thin package standing only 0.070" high! Scoop the competition and upgrade to the next level of performance in your higher frequency products...contact Mini-Circuits for Blue Cell™ mixers today.

*Mini-Circuits...we're redefining what VALUE is all about!*

| Model No. | Level (LO) | Freq. (GHz) | Price $ea. |
|---|---|---|---|
| MBA-10VL | 0 | 0.8-1.0 | 5.95 |
| MBA-10L | +3 | 0.8-1.0 | 6.95 |
| MBA-15L | +4 | 1.2-2.4 | 6.95 |
| MBA-18L | +4 | 1.6-3.2 | 6.95 |
| MBA-25L | +4 | 2.0-3.0 | 6.95 |
| MBA-35L | +4 | 3.0-4.0 | 6.95 |
| MBA-9 | +7 | 0.8-1.0 | 5.95 |
| MBA-12 | +7 | 0.8-2.5 | 5.95 |
| MBA-26 | +7 | 2.2-2.7 | 5.95 |
| MBA-59† | +7 | 2.8-5.9 | 6.95 |
| MBA-67† | +7 | 2.4-6.7 | 8.95 |
| MBA-15LH | +10 | 1.2-2.4 | 6.95 |
| MBA-18LH | +10 | 1.6-3.2 | 6.95 |
| MBA-25LH | +10 | 2.2-3.6 | 6.95 |
| MBA-35LH | +10 | 3.0-4.0 | 6.95 |
| MBA-9MH | +13 | 0.8-1.0 | 7.95 |
| MBA-12MH | +13 | 0.8-2.5 | 7.95 |
| MBA-15MH | +13 | 1.4-2.4 | 7.95 |
| MBA-18MH | +13 | 1.6-3.2 | 7.95 |
| MBA-25MH | +13 | 2.0-3.0 | 7.95 |
| MBA-35MH | +13 | 3.0-4.0 | 7.95 |
| MBA-9H | +17 | 0.8-1.0 | 9.95 |
| MBA-12H | +17 | 0.8-2.5 | 9.95 |

BLUE CELL® TECHNOLOGY



ACTUAL SIZE

Protected by U.S. patents 5,534,830 5,640,132 5,640,134 5,640,699

## Mini-Circuits®

US 102 INT'L 103 CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

*The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: http://www.minicircuits.com*

F 314 Rev. Orig.

SPECIALTY ANTENNAS
IS OUR MIDDLE NAME
Microwave Specialty Corporation
has been in the business of producing quality custom antennas for over 30 years. Our 50,000 square foot manufacturing facility is equipped to handle all phases of development including design, fabrication and testing. MSC is capable of producing a wide variety of antenna types for various commercial and military applications.



- Reflector Antennas
- Radomes
- Horn Antennas
- Omni Antennas
- Helix Antennas
- Log Periodic Antennas
- Arrays (including microstrip)
- Auto-Tracking Antennas

For more information, call or visit our website at:
www.microwavespecialty.com

MICROWAVE SPECIALTY CORPORATION
Designers and Manufacturers of Microwave Antennas and Related Components
520 E. Carmel Street
San Marcos, CA 92069-4499
(760)744-1544
fax (760)744-1565








▲ *Fig. 1 The MBA-671 mixer's conversion loss at 30 MHz IF output.*




▲ *Fig. 2 The MBA-671 mixer's isolation at +7 dBm LO drive.*




▲ *Fig. 3 The MBA-671 mixer's SWR vs. frequency at +7 dBm LO drive; (a) RF and LO and (b) IF.*

**TABLE I**
**MIXER SPECIFICATIONS**

| | MBA-591 | MBA-671 |
|---|---|---|
| Frequency range (MHz) | | |
| LO/RF | 2800 to 5900 | 2400 to 6700 |
| IF | DC to 1000 | DC to 1000 |
| Average conversion loss at center band (dB) | 6.5 | 6.5 |
| LO-to-RF isolation (dB) | 36 (typ), 20 (min) | 36 (typ), 20 (min) |
| LO-to-IF isolation (dB) | 26 (typ), 17 (min) | 26 (typ), 17 (min) |
| IP3 at center of band (typ) (dBm) | 10 | 10 |
| Price (10 to 49 pieces) ($) | 6.95 | 8.95 |

less than 6.5 dB from 2600 to 5000 MHz and increases to 8.2 dB at 6700 MHz. LO-to-RF isolation is typically greater than 30 dB across the entire range, while LO-to-IF isolation is typically greater than 22 dB. ***Figure 1*** shows the mixer's conversion loss with a 4, 7 and 10 dBm LO drive. ***Figure 2*** shows the port-to-port isolations at a 7 dBm LO drive. ***Figure 3*** shows the RF, LO and IF port SWRs. Performance is dependent on the quality of the printed ceramic substrate. High performance materials with ground vias placed less than an eighth-wavelength apart are employed. A recommended footprint is provided in the mixer data sheet and can be downloaded from the company's Web site at www.minicircuits.com in the online catalog. ***Table 1*** shows the mixer's specifications.

## APPLICATIONS

The mixer is a standard double-balanced design and can be used both as an upconvertor and a downconvertor. The IF is DC coupled so the mixer can be utilized for balanced modulator applications. The broad IF range allows the mixer to be used in satellite applications for multichannel communications. The low conversion loss results in lower noise figure. For applications requiring higher dynamic range, higher level mixers that improve IP3 performance are offered.

## CONCLUSION

A new series of microwave high performance surface-mount mixers has been presented. These mixers are very low height and are suitable for Personal Computer Memory Card International Association computer card applications. The MBA-series products are designed for demanding low cost, high quality, high volume applications.

**Blue Cell Technology, a family member of Mini-Circuits, Brooklyn, NY (718) 934-4500.**

***Circle No. 303***

# Into the Millennium and beyond...
# A Stronger Signal

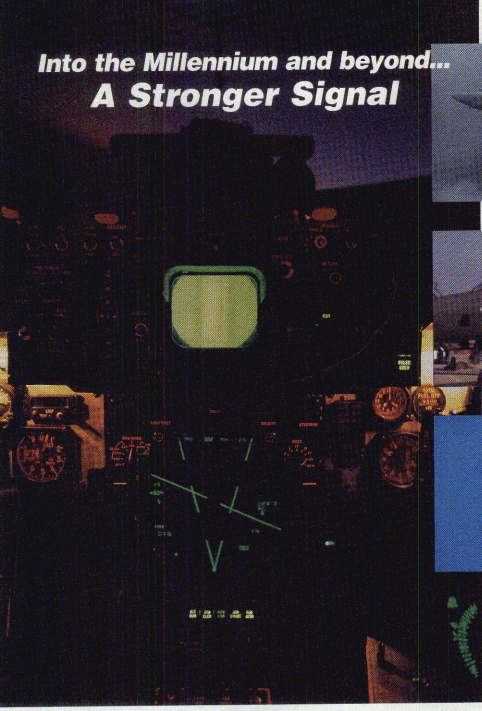







**MODEL 6458 SYNTHESIZER**

- *2-18 GHz Full Band Operation*
- *Low Phase Noise*
- *Fast Switching Speed*
- *Single Loop Design*
- *VME Compatible (6U/2Slot)*
- *VXI Convertible*

## First CD, DVD and now Synthesizers for Digital RWRs

Signal Technology, Arizona Operation has released its newest, full band, 2-18 GHz synthesizer for Electronic Warfare/Radar Warning Receiver upgrades requiring digital front ends. Our new standard synthesizer has been designed for production to exceed customer performance expectations at a remarkable low price. This synthesizer offers excellent switching speeds and low phase noise. Customization is available to meet our customers value expectations and special applications.

***To learn more about the Series 6458 synthesizer product line, visit our website at www.sigtech.com or call (480) 961-6230.***

SIGNAL TECHNOLOGY CORPORATION

ARIZONA OPERATION • 340 N. ROOSEVELT AVENUE • CHANDLER, AZ 85226 • TEL. 480.940.1655 • FAX 480.961.6297

CIRCLE 147 ON READER SERVICE CARD



# KLYSTRON HIGH POWER AMPLIFIERS FOR SATCOM APPLICATIONS

A new family of C-band, Ku-band and direct broadcast satellite (DBS)-band compact GEN IV klystron power amplifiers (KPA) has been introduced. The new amplifiers incorporate a multistage depressed-collector (MSDC) klystron that allows for a smaller, more efficient and cooler running amplifier than other KPAs on the market. The unique design translates into lower power costs and longer lifetime for the klystron and other electronic components. In addition, a built-in power saver function provides even greater power savings. The new amplifier family comprises the C-band series, Astra series (13.25 GHz), K4U64 series (14.5 GHz) and K4D62/4 series (18.4 GHz).

## KPA DESCRIPTION

The GEN IV series KPAs feature 2.4 kW of RF output power at the klystron, which is tunable over the 5.850 to 6.725, 12.75 to 13.25, 13.75 to 14.50 or 17.30 to 18.40 GHz frequency ranges, depending on the klystron used. Options exist for other frequency ranges as well. The amplifier's compact, two-drawer design provides state-of-the-art modularity for ease of use and maintainability.

The GEN IV KPA's RF chain is housed in the RF drawer and comprises a solid-state integrated power amplifier (IPA), the MSDC klystron, a high power output isolator, and associated couplers and isolators. The klystron blower, front control panel and embedded controller also are contained in this drawer. A mechanical channel tuner mechanism permits the operator to change any of up to 24 preset frequencies. An optional channel selector (< 1 s per change) with remote controllability is also available.

The power supply drawer houses the AC input filtering, monitoring and high voltage power supply. This supply provides regulated beam, heater and collector voltages for the klystron. The GEN IV amplifier is adaptable to all primary three-phase voltages available worldwide. The KPA is protected from damage caused by AC/DC/RF faults and insufficient cooling, and will automatically recycle after a prime power interruption or transient fault.

The control panel contains a large color thin-film technology liquid crystal display (TFT-LCD) with a wide viewing angle, light-emitting diodes and a long-lasting membrane-style keypad. The controls directly interface with the earth station computer system; a remote control panel with identical functions and configuration is available as an option.

*[Continued on page 162]*

COMMUNICATIONS & POWER INDUSTRIES (CPI),
SATCOM DIVISION
*Palo Alto, CA*

# As reliable as a sunrise,

# CPI always comes through.



Whether it's the shipment of a JETSAT™ klystron with guaranteed 24-hour on-site delivery, or a brand new design project, CPI's veteran klystron team is just a hot line phone call away.

Satcom uplink klystrons are our business. We are the world's largest and most experienced klystron manufacturer, and we're committed to be the best: In quality! And in customer service!

CPI offers the widest range of uplink klystrons in the world. Our design team responds to new application needs in incredibly short time frames—always the first to serve you and always with CPI's renowned klystron reliability and dependability. To top it off, we now give you subsecond channel changing with digital precision, for all our C- and Ku-band klystrons.

You can always count on us. Come to CPI for all your klystron needs.




**CPI the right source.**

CPI
Communications & Power Industries

**Communications & Power Industries Canada, Inc.**
45 River Drive | Georgetown, Ontario | Canada L7G 2J4
TEL: 1-905-877-0161 | FAX: 1-905-873-7416 | SERVICE: 1-800-267-JETSAT
E-MAIL: marketing@cmp.cpii.com | www.cpii.com/cmp
formerly varian

CIRCLE 31 ON READER SERVICE CARD

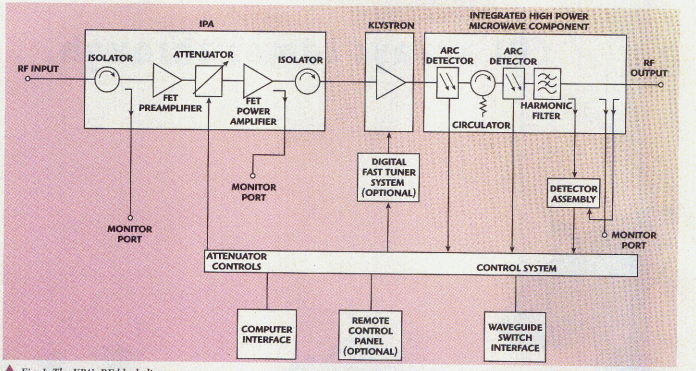


▲ *Fig. 1 The KPA's RF block diagram.*

## THE RF CIRCUIT

***Figure 1*** shows the RF circuit block diagram. The low level input signal is applied through an isolator to the IPA, which includes a voltage-controlled PIN diode attenuator, input and output isolators, and directional couplers. The attenuator permits the operator to

*[Continued on page 164]*


**RF/MICROWAVE**

**SOFTWARE DEVELOPERS**
**SALES AND MARKETING PROFESSIONALS**

**ATLANTA, GA**

Eagleware Corporation, located in NE Atlanta, is seeking experienced engineers, software developers, and marketing and sales professionals to accommodate the company's rapid growth. We offer a competitive salary and exceptional benefits.

***POSITIONS AVAILABLE:***

- **Application/Testing Engineer**
- **Model Engineer**
- **Electromagnetic Simulation Developer**
- **System Simulation Developer**
- **Windows Developer**
- **International Sales Manager**
- **Marketing Communications Manager**

Eagleware, founded in 1985, is a successful, entrepreneurial software firm that develops, distributes, and supports RF and microwave design software. Complete job descriptions are available on our web site, **www.eagleware.com**; or, send a resume to **jobs@eagleware.com**.

**EAGLEWARE**
**RF and Microwave Design Software**

4772 Stone Drive • Tucker, Georgia 30084
FAX: 770-939-0157
E-mail: jobs@eagleware.com

Right Brain Components.

# Our left brain figured you could use a totally passive attenuator that will compensate for changes in your amplifier gain over temperature.



# Our right brain created Thermopad.

***Our Thermopad® surface mount attenuators provide temperature compensation.*** Replace complicated active control circuits that are expensive, less reliable, produce distortion and eat up valuable PC board space. Thermopads can be used in place of a standard chip attenuator to combine level setting and temperature compensation in one chip, reducing your component count, increasing reliability and saving you money.

CIRCLE 42 ON READER SERVICE CARD

**Call us at 856-429-7800,**
and ask about Thermopad, another brainstorm from EMC.
Or visit **www.emct.com**

**EMC TECHNOLOGY, INC.**
*Right Brain Components.*

A Smiths Industries Company

QUINSTAR TECHNOLOGY, INC.

**Your Reliable Source**

For Millimeter-Wave Products and GaAs FET & MMIC Amplifiers



**Broadband Low-Noise Amplifiers**
0.5–60.0 GHz (octave/multi-octave)

**Narrowband Low-Noise Amplifiers**
From 0.5–110 GHz
Noise figure as low as 0.4 dB

**Broadband High Power Amplifiers**
0.8–29.0 GHz (octave/multi-octave)
Up to 20W output power @P1dB

**Narrowband Power Amplifiers**
0.5–110 GHz
Up to 20W output power @P1dB

**Active/Passive Frequency Multipliers**
0.5–110 GHz
Multiplication factors up to ×12

**Injection-Locked Amplifiers**
30–100 GHz
High millimeter wave power output

**Millimeter-Wave Sources**
Gunns, FETs, IMPATTs, PLOs, ILOs and VTOs

**Millimeter-Wave Receiver Products**
Harmonic Mixers, LOs, Up/Downconverters, PIN Switches, Detectors

**Antenna Products**
Horns, Feeds, Lens Reflectors, OMTs, Polarizers, Filters, Diplexers

**Ferrite and Waveguide Components**
Isolators, Circulators, Couplers, Power Dividers/Combiners, Waveguide Bends, Twists, Transitions

**Subsystems and Instruments**

**We always do the right things at the right price.**

**Call us today for a quotation!**

QuinStar Technology, Inc.
24085 Garnier Street, Torrance, CA 90505
Tel: (310) 320-1111/Fax: (310) 320-9968
sales@quinstar.com
www.quinstar.com



CIRCLE 131



**TABLE I**
**KPA SPECIFICATIONS**

| | |
|---|---|
| Frequency range (GHz) | 5.850 to 6.725<br>6.700 to 7.025<br>13.75 to 14.50<br>12.75 to 13.25<br>17.30 to 18.10<br>17.30 to 18.40 |
| Klystron rated power (min) (kW) | |
| C band | 3.35 |
| Ku band | 2.4 |
| Astra band | 2.2 |
| DBS band | 2.4 (17 for 18.4 GHz) |
| Preset channels | up to 24 |
| Gain (at rated output) (min) (dB) | |
| C, Ku and Astra band | 80 |
| DBS band | 75 |
| Power adjustability | 0 to –23 dB (of output) |
| Input SWR (max) | 1.20 (C, Ku, Astra)<br>1.25 (DBS) |
| Output SWR (typ) | 1.25 (C, Ku)<br>1.30 (DBS) |
| Residual AM* (max) (dBc) | 50 up to 400 Hz<br>60, 400 Hz to 2 kHz<br>80, 2 kHz to 500 kHz |
| AM/PM conversion (max) (°/dB) | 4 (at rated output) |
| Harmonic output (dBc) | |
| Ku and Astra band | –80 (–35 without harmonic filter) |
| DBS band | –70 (–30 without harmonic filter) |
| Phase noise* | exceeds requirements of IESS-308/309 by 10 dB<br>at 10 dB backoff;<br>C band meets INMARSAT requirements |
| Intermodulation (dBc) | –25 with two equal carriers at total output |
| Primary power (47 to 63 Hz, three-phase with neutral and ground) (VAC) | 208<br>380 to 415<br>480<br>200 w/o neutral (Japan) |
| Power consumption (max) (kW) | 8<br>8.5 (C band) |
| Ambient temperature (°C) | 10 to +50 operating<br>–40 to +80 nonoperating |
| RF input connection | Type N female (C, Ku, Astra)<br>SMA type female (DBS) |
| RF output connection | CPR 137F flange (C)<br>WR-75 grooved flange (Ku, Astra)<br>WR-62 grooved flange (DBS) |
| Dimensions (w × h × d) (") | |
| RF drawer | 19 × 17.5 × 25, not including fans |
| power supply drawer | 19 × 8.75 × 24, not including fans |

*Prime power AC line unbalance not to exceed three percent.

quickly adjust the RF drive level within a 25 dB linear range with a resolution of 0.1 dB. An internal memory function returns the amplifier to the previously set level in case of a power outage. The IPA also includes an RF inhibit function to remove the drive signal during faults, channel changes, transfer switch operations or external interlock actions.

The IPA is transparent to most final amplifier parameters and is temperature compensated to minimize drift. As a result, the overall KPA gain is stable to within 1 dB over a 20°C temperature change and within 2.5 dB over the 0° to +50°C operating range. ***Table 1*** lists the KPA's specifications.

*[Continued on page 166]*

# incredible!




## 1 watt amplifier family, 10 MHz to 4.2 GHz...from $895

Now is the time to rethink your design decisions—if you require up to 1 watt output for low-distortion intermodulation testing...broadband isolation...flat gain over wide bandwidth—or if you need much higher output level from your signal/sweep generator or frequency synthesizer—you can now specify Mini-Circuits' new ZHL Series, power amplifiers...from only $895.

Using ultra-linear Class A design, these state-of-the-art amplifiers provide up to 40 dB, flat (±1.0dB), are unconditionally stable, include overvoltage protection, and can be connected to any load impedance without amplifier damage or oscillation.

One week delivery...and, of course, one year guarantee.

| SPECIFICATIONS | ZHL-42 | ZHL-4240 | ZHL-42W | ZHL-W240W |
|---|---|---|---|---|
| Frequency, GHz | 0.7 to 4.2 | 0.7 to 4.2 | 0.01 to 4.2 | 0.01 to 4.2 |
| Gain, dB min. | 30 | 40 | 30 | 40 |
| Gain Flatness, dB | ±1.0 | ±1.5 | ±1.5 | ±1.5 |
| Power Out @ 1 dB CP, dBm min. | +29 | +29 | +29* | +29* |
| VSWR in/Out, max. | 2.5:1 | 2.5:1 | 2.5:1 | 2.5:1 |
| Noise Figure, dB typ | 10.0 | 4.0 | 8.0** | 8.0** |
| Power Supply, V/ma | +15/690 | +15/700 | +15/750 | +15/850 |
| Third Order Intercept, dBm min. | 38 | 38 | 38 | 38 |
| Second Order Intercept, dBm min. | 48 | 48 | 48 | 48 |
| Size, in | .7 x 3¼ x 2¼ h. | .7 x 3¼ x 2¼ h. | .7 x 3¼ x 2¼ h. | .7 x 3¼ x 2¼ h. |
| **Price** | **$895.00** | **$1395.00** | **$1095.00** | **$1495.00** |

* + 28 dBm, 10 MHz to 700 MHz, 3500 MHz to 4200 MHz
**Below 100 MHz increases to 15 dB at 10 MHz

**Mini-Circuits®**

US 104 INT'L 105
CIRCLE READER SERVICE CARD

P.O Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718)332-4661 *INTERNET* http://www.minicircuits.com
For detailed specs on all Mini-Circuits products refer to • 760-pg. HANDBOOK • INTERNET • THOMAS REGISTER • MICROWAVE PRODUCT DATA DIRECTORY • EEM

ISO 9001 CERTIFIED

### THE MSDC KLYSTRON

The klystrons used in the C-, Ku- and DBS-band GEN IV amplifiers incorporate an advanced design using MSPCs that deliver up to 2.4 kW (3.35 kW in C band) of output power across the specified frequency band. The instantaneous (–1 dB) bandwidth is 45 MHz (80 MHz optional) for C band, and 85 MHz (80 MHz for Astra) and 50 MHz (85 MHz optional up to 1.7 kW) in the Ku and DBS bands, respectively. A standard integral mechanical channel tuning mechanism provides precise tuning and retrieval of up to 24 channels and allows for manual frequency changing in the field. Preset frequencies are factory tuned in accordance with a standard frequency plan unless otherwise specified.

### THE OUTPUT CIRCUIT

The output of the klystron is fed to the integrated output waveguide assembly, which comprises two arc detector ports, a circulator and loads, a harmonic filter and a three-port directional coupler. The optical arc sensor is attached to a waveguide bend that is located near the output of the klystron. If an arc occurs in the waveguide, the light is detected and the protection circuit rapidly turns off the IPA to inhibit the RF drive, thereby quenching the arc.

The high power isolator provides a low SWR source to the external waveguide and antenna feed and protects the klystron from excessive reflected power resulting from external faults. The isolator will continuously dissipate the reflected power from a 2:1 load (11 percent of the rated power), and safely withstands reflected power equal to the full rated KPA output until the protection circuits shut off the RF signal. The optionally removable harmonic filter attenuates the second harmonic to levels at least 80 dB below the fundamental output.

The output directional coupler includes two forward ports and one reflected port. One forward port provides an RF sample at a nominal –50 dBc. The second forward port and the reflected power port are connected through the detector assembly to the controller. The metering signals are also used to activate the high/low RF power alarm and the high reflected power fault-protection circuit. The standard output RF interface is CPR-137F (C band), WR-75 (Ku band) or WR-62 (DBS band) waveguide with a grooved flange.

### THE POWER SUPPLY ASSEMBLY

The AC input power is routed through an EMI filter and main circuit breaker and passes through the step start circuit that is used to limit in-rush current to < 180 percent of steady state during high voltage turn on. The AC power is then converted to DC and passed to the power processor, which converts the DC voltage to a 50 kHz AC voltage that is applied to the high voltage transformer and rectifier. The rectified output is filtered and provides the cathode, heater and collector voltages for the klystron. Samples of the cathode and heater voltages are fed to the power processor as part of the regulation scheme. The embedded control system monitors cathode

[Continued on page 168]


INVESTIGATING DETECTORS?

Inspect Cougar's new line of analog and threshold detectors. On the strength of our engineering expertise, we developed a complete line of high performance detectors suitable to commercial and hi-rel applications.

- broad bandwidths (10 MHz - 6 GHz)
- low VSWR (1.4:1)
- ± 0.5 flatness
- high dynamic range



Signal Processing Components & Subsystems

COUGAR COMPONENTS

ISO 9001 & MIL-PRF-38534 Certified

384 Santa Trinita Avenue, Sunnyvale, CA 94086
408-522-3838 • fax: 408-522-3839 • web: www.cougarcorp.com
e-mail: cougar.amps3@cougarcorp.com




ite low skew cable fibre channel ax cable microwave coax oax Q-flex coax semi-rigid twisted pair ca
ro miniature custom cable 2mm mbles fpd assemblies cable as
ohm and 75 ohm RF and microwave obes 2mm HM 2mm HDM del
e assemblies (dc to 40 ghz) cable oax ultrasound probes semi-fl
nectors - sma smb smc mcx mmcx tnc bnc type n type h 7/16 ssma ssmb 1.0mm 7mm 2.4mm type n type

# Tensolite

## The Cable Assembly Standard for Connecting a Wireless World

QMI's proven **LOW LOSS "301"** assembly, ends the 3-way compromise users face when defining insertion loss for higher frequency, with flexible cable assemblies. Historically, low loss meant high price or reduced flexibility. **"301"** cable is a microporous PTFE design in .200" diameter that offers all three advantages: Low Loss, Low Price and Excellent Flexibility.

- Small/Weak Signals
- Transmit/ Receive Systems
- Performance Upgrades
- Cost Reduction
- Replacement for Semi-Rigid

**"301" LOW LOSS** assemblies help the designer achieve system performance goals while retaining the flexibility of braided cables. Alternatively, **"301"** cables may be used to replace .141" diameter semi-rigid or .250" diameter corrugated copper cables. And for those test applications that require low loss measurement, try our new **Low Loss Workhorse Test Cables.**






MADE IN THE USA

Tensolite

QMI® Microwave Interconnects

A GARLOCK Company

**1-800-362-FLEX**

301 Ballardvale St. Wilmington, MA 01887

FAX: (978) 988-9393 www.qmiinc.com Email: sales@qmiinc.com

MasterCard VISA AMERICAN EXPRESS

voltage, beam current, body current, heater voltage and heater current.

The cathode and heater voltages are microprocessor controlled and set for the particular klystron. The power saver function uses this flexibility to set the beam voltage when less than rated RF power is required. In addition, the klystron heater voltage is set accordingly to extend the klystron's life. A standby mode is available to allow extended klystron life when the amplifier is not used for long periods of time but is required to be available at a moment's notice.

## MONITORS AND CONTROLS

The control and monitor system is designed to assure correct amplifier operation and easy maintenance with minimal operator training and activity. A system of embedded controllers provides automatic sequencing and continuous monitoring of critical parameters. All operational information is clearly displayed on the large color TFT-LCD panel. The membrane keypad provides convenient control from the front panel.

Upon power on, the embedded controller self-tests the internal functions and begins heater warm-up. Once warm-up is complete, the transmit key initiates normal operation. Automatic leveling then can be keyed to maintain a set power output level against RF input variations. The amplifier's fault handling circuit is tolerant of transient faults, returning the amplifier to the state it was in when the fault occurred (if appropriate). In the event of a fault warranting a permanent shutdown, the fault will be clearly displayed with time and date stamps. The fault then must be cleared and the cancel key depressed in order to reset the amplifier. The standard KPA permits computer control and monitoring through an RS-422/485 (four-wire) serial data bus. This capability provides the operator with a convenient and reliable means to monitor and control the power amplifiers at a remote, unattended earth station.

## MECHANICAL DESIGN

The GEN IV KPA is packaged in two sturdy aluminum enclosures that offer convenient front access for service and maintenance. Both power supply and RF boxes are designed to be mounted in standard 19-inch racks using chassis slides. Within the RF box the klystron, RF components and RF control parts are mounted on a slide-out drawer.

Measuring 26.25" high (15 RU), the KPA is designed for space-constrained locations. All electrical interface connections and exhaust ducting for the klystron cooling air are located at the rear of the unit. Nearly all maintenance activities can be accomplished from the front of the equipment. Two independent cooling circuits are used in the KPA, one for the klystron collector and one for the power supply.

## OPTIONS AND ACCESSORIES

Among the available options and accessories are a digital fast-tuning system that provides an automatic channel selector comprising a motor drive and control unit as an integral part of the klystron. This motorized electronic channel changer achieves a maximum 1 s channel changing time. In addition, a peak power meter is available for use when the KPA is used in a TDMA system. The circuit responds to burst signals of 5 µs (min) pulse width and a maximum repetition of 100 ms. With this option the meter reads either peak or CW power in accordance with the signal being transmitted.

A remote control panel is available that duplicates all of the controls and indicators of the main panel and communicates with the KPA via the serial interface. Also available is a 1:1 switching subsystem that comprises an output waveguide switch and dummy load. The circuit provides 1:1 redundant protection with automatic transfer or manual operation. A power phase combiner consisting of a coaxial input divider network, phase shifter and output waveguide combining system provides four operating modes when two KPAs are used in combination. A linearizer is also available that provides an improvement in AM/PM, third-order intermodulation spectral regrowth and noise power ration performance.

**CPI, Satcom Division,**
**Palo Alto, CA (650) 846-3700.**

***Circle No. 301***

SEARCH
microwave JOURNAL®

Get a Free Subscription
Enter The Manufacturer Directory

HOME
DIRECTORY
ARCHIVES
BULLETIN BOARD
PRODUCTS
MTT-S
EVENTS
ABOUT MWJ

Visit the MWJ "Manufacturer's Directory" on our WebSite

⇒ Locate companies and products
⇒ Submit a Free Listing for your company
⇒ Find out about advertising opportunities in the directory

http://www.mwjournal.com

# MILLIMETER WAVE
# COMPONENTS
## AMPLIFIERS • MIXERS • MULTIPLIERS



### AMPLIFIERS

| Model Number | Frequency (GHz) | Gain (dB, Min.) | Gain Flatness (±dB, Max.) | Noise Figure (dB, Max.) | I/O VSWR (Max.) | Output Power at 1dB Comp.* (dBm, Typ.) |
|---|---|---|---|---|---|---|
| JSW4-18002600-18-5A | 18-26 | 28 | 1.0 | 1.8 | 2.0:1/2.0:1 | 5 |
| JSW4-26004000-25-5A | 26-40 | 25 | 2.5 | 2.5 | 2.0:1/2.0:1 | 5 |
| JSW4-18004000-32-8A | 18-40 | 21 | 2.0 | 3.2 | 2.0:1/2.5:1 | 8 |
| JSW4-30005000-45-5A | 30-50 | 21 | 2.5 | 4.5 | 2.5:1/2.5:1 | 5 |
| JSW4-40006000-65-0A | 40-60 | 16 | 2.5 | 6.5 | 2.5:1/2.5:1 | 0 |

* Higher output power options available



### MIXER/CONVERTER PRODUCTS

| Model Number | Frequency (GHz) | | | Conversion Gain/Loss (dB, Typ.) | Noise Figure (dB, Typ.) | Image Rejection (dB, Typ.) | LO-RF Isolation (dB, Typ.) |
|---|---|---|---|---|---|---|---|
| | RF | LO | IF | | | | |
| LNB-1826-30 | 18-26 | Internal | 2-10 | 42 | 2.5 | 20 | 45 |
| LNB-2640-40 | 26-40 | Internal | 2-16 | 42 | 3.5 | 20 | 45 |
| ARE3436LC1 | 34-36 | 15.5-16.5 | 2.7-3.3 | 25 | 4 | 20 | 60 |
| SBW3337LG2 | 33-37 | 33-37 | DC-4 | -7.5 | 8 | N/A | 25 |
| TB0440LW1 | 4-40 | 4-42 | .5-20 | -10 | 10.5 | N/A | 20 |
| DB0440LW1 | 4-40 | 4-40 | DC-2 | -9 | 9.5 | N/A | 25 |
| SBE0440LW1 | 4-40 | 2-20 | DC-1.5 | -10 | 10.5 | N/A | 20 |



### MULTIPLIERS

| Model Number | Frequency (GHz) | | Input Level (dBm, min.) | Output Power* (dBm, min.) | Fundamental Feed Through Level (dBc, min.) | DC current @+15VDC (mA, nom.) |
|---|---|---|---|---|---|---|
| | Input | Output | | | | |
| MAX2M260400 | 13-20 | 26-40 | 10 | 12 | 18 | 160 |
| MAX2M200380 | 10-19 | 20-38 | 6 | 14 | 18 | 200 |
| MAX2M300500 | 15-25 | 30-50 | 10 | 8 | 18 | 160 |
| MAX4M400480 | 10-12 | 40-48 | 10 | 8 | 18 | 250 |
| MAX3M300300 | 10 | 30 | 10 | 10 | 60 | 160 |
| MAX2M360500 | 18-25 | 36-50 | 10 | 8 | 18 | 160 |
| MAX2M200400 | 10-20 | 20-40 | 10 | 10 | 18 | 160 |
| TD0040LA2 | 2-20 | 4-40 | 10 | -3 | 30 | N/A |

* Higher output power options available

**MITEQ also offers custom designs to meet your specific requirements.**
**For further information, please contact David Krautheimer**
**at (516) 439-9413 or e-mail dkrautheimer@miteq.com**

ISO 9001

MITEQ

100 Davids Drive • Hauppauge, NY 11788
TEL.: (516) 436-7400 • FAX: (516) 436-7430
www.miteq.com

CIRCLE 113 ON READER SERVICE CARD




# A WEB-BASED TEST EQUIPMENT LOCATOR

One of the most frustrating jobs an engineer must face is selecting and locating a piece of test equipment to meet a specific demand among the myriad of offerings by hundreds of equipment manufacturers and the many varying performance specifications. It was inevitable that the now ubiquitous World Wide Web would ultimately provide the solution to this time-consuming problem. TestMart™ is a unique new online service that lists more than 13,000 products from 200 manufacturers in more than 90 categories of test equipment and provides a means for side-by-side comparison of their performance specifications, price and availability. The user can now use this information to determine whether to buy, rent or lease new, used or refurbished equipment in an extraordinarily efficient manner.

*Fig. 1 The TestMart home page.*

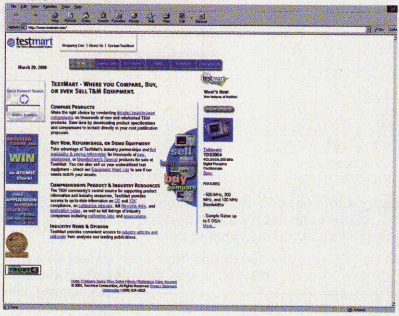


The TestMart site, shown in ***Figure 1***, provides answers in seconds to questions that previously required hours or even days to research. In addition, the service offers application assistance from experienced engineers to answer many of the user's questions. When the decision is made to acquire the sought-after equipment, the site provides information on which manufacturers make which equipment in side-by-side views and what price trade-offs are available. It

*[Continued on page 172]*

TESTMART
*San Bruno, CA*




# BIAS TEES

From $25.95




Easily combines RF+DC signals for your modulation or test requirements.

## Now up to 500mA DC current 100kHz-6GHz

With Mini-Circuits Bias-Tees, you can DC connect to the RF port of an active device without effecting its RF properties...modulate a laser, apply DC to an amplifier output, and more! Using statistical process control plus combining magnetics and microstrip, large DC currents may pass through the Bias-Tee without saturation and degradation of performance. At 1/3 to 1/4 the price of competitive units, these new Bias-Tees are available in surface mount, pin, and connectorized models. So why wait, solve your connection problems with Mini-Circuits Bias-Tees.




***Mini-Circuits...we're redefining what VALUE is all about!***

| Model | Freq (MHz) | Insertion Loss (dB Typ.) | | | Isolation (dB Typ.) | | | VSWR (Typ.) | Price $ ea |
|---|---|---|---|---|---|---|---|---|---|
| | F-F | L | M | U | L | M | U | U | 1-9 qty. |
| | 10-4250 | 0.15 | 0.6 | 0.6 | 32 | 40 | 50 | 1.13:1 | 59.95 |
| ▲ZFBT-4R2G | 10-6000 | 0.15 | 0.6 | 1.0 | 32 | 40 | 30 | 1.13:1 | 79.95 |
| ▲ZFBT-4R2GW | 0.1-4200 | 0.15 | 0.6 | 0.6 | 25 | 40 | 50 | 1.13:1 | 79.95 |
| ▲ZFBT-6GW | 0.1-6000 | 0.15 | 0.6 | 1.0 | 25 | 40 | 30 | 1.13:1 | 89.95 |
| ▲ZFBT-4R2G-FT | 10-4200 | 0.15 | 0.6 | 0.6 | N/A | N/A | N/A | 1.13:1 | 59.95 |
| ▲ZFBT-6G-FT | 10-6000 | 0.15 | 0.6 | 1.0 | N/A | N/A | N/A | 1.13:1 | 79.95 |
| ▲ZFBT-4R2GW-FT | 0.1-4200 | 0.15 | 0.6 | 0.6 | N/A | N/A | N/A | 1.13:1 | 79.95 |
| ▲ZFBT-6GW-FT | 0.1-6000 | 0.15 | 0.6 | 1.0 | N/A | N/A | N/A | 1.13:1 | 89.95 |
| ▲ZNBT-60-1W | 2.5-6000 | 0.2 | 0.6 | 1.6 | 75 | 45 | 35 | 1.35:1 | 82.95 |
| ■FBTC-1G | 10-1000 | 0.15 | 0.3 | 0.3 | 27 | 33 | 30 | 1.10:1 | 25.95 |
| ■FBTC-3G | 10-3000 | 0.15 | 0.3 | 1.0 | 27 | 30 | 35 | 1.60:1 | 35.95 |
| ■FBTC-1GW | 0.1-1000 | 0.15 | 0.3 | 0.3 | 25 | 33 | 30 | 1.10:1 | 35.95 |
| ■FBTC-3GW | 0.1-3000 | 0.15 | 0.3 | 1.0 | 25 | 30 | 35 | 1.60:1 | 45.95 |
| ▲JEBT-4R2G | 10-4200 | 0.15 | 0.6 | 0.6 | 32 | 40 | 40 | - | 39.95 |
| ▲JEBT-6G | 10-6000 | 0.15 | 0.7 | 1.3 | 32 | 40 | 40 | - | 59.95 |
| ▲JEBT-4R2GW | 0.1-4200 | 0.15 | 0.6 | 0.6 | 25 | 40 | 40 | - | 59.95 |
| ▲JEBT-6GW | 0.1-6000 | 0.15 | 0.7 | 1.3 | 25 | 40 | 30 | - | 69.95 |

L = Low Range M = Mid Range U = Upper Range

NOTE: Isolation dB applies to DC to (RF) and DC to (RF+DC) ports.

▲SMA Models, FT Models Have Feedthrough Terminal ●Type N, BNC Female at DC

■Pin Models •Surface Mount Models


**Mini-Circuits®**

US 98 INTL 99
CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

*The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: http://www.minicircuits.com*



ISO 9001 CERTIFIED

F 164 Rev B

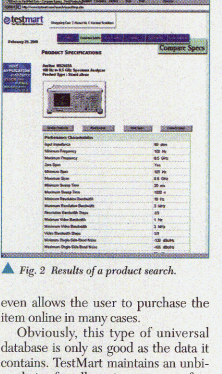

▲ *Fig. 2 Results of a product search.*

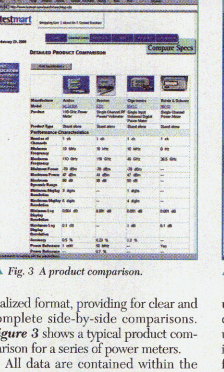

▲ *Fig. 3 A product comparison.*

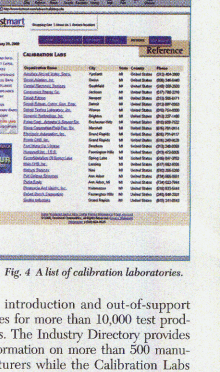

▲ *Fig. 4 A list of calibration laboratories.*

even allows the user to purchase the item online in many cases.

Obviously, this type of universal database is only as good as the data it contains. TestMart maintains an unbiased site for all equipment manufacturers. (TestMart covers the cost of maintaining the site by negotiating agreements with various manufacturers that allow the site to maintain neutrality. These agreements may include commissions, acting as a virtual distributor or warehousing some TestMart-owned stock. However, the cost is never passed on to the buyer.) The buyer is offered free membership and registration is not required until he or she makes the acquisition. Once membership has been established the user has the ability to search the data at will, request additional literature and quotes from listed manufacturers and even purchase online from participating suppliers. In many cases direct links are provided to the manufacturer's own Web site.

Maintaining such a comprehensive database is a daunting task. The database is constantly updated and expanded as new participating companies sign on and new data become available. Information is provided on products from all manufacturers whether or not they have chosen to affiliate. Powerful search engines enable the user to access all sources in the database and locate products that meet his or her specifications quickly. ***Figure 2*** shows the results of a search for a particular type of spectrum analyzer. Detailed specifications are presented in a normalized format, providing for clear and complete side-by-side comparisons. ***Figure 3*** shows a typical product comparison for a series of power meters.

All data are contained within the site, thus eliminating the time-consuming process of gathering and piecing together incomplete information in dissimilar formats from multiple sources. In addition, users can perform parametric searches specific to each product category. The CompareSpecs feature presents side-by-side product comparisons. TestMart's proprietary Similar Products search function, Find-Like, retrieves products that are engineering equivalents based on key technical parameters. The BuyOnLine function offers online shopping with secure transaction processing and order confirmation for new, demo and refurbished equipment. TestMart also acts as a distributor and sales representative for many manufacturers of new products and maintains a large inventory of refurbished test equipment. Customers can trade in or sell their unused equipment using TestMart's Sell Online function. The TestMart Equipment Want List guarantees customers a market price online in real time.

One of the added features of the site is the Active Partnership Program, which makes available full-text articles from leading publishers and industry analysts. In addition, exclusive test and measurement market reports from Frost & Sullivan appear on the site. The Web site also features comprehensive reference tools, including calibration interval information and product introduction and out-of-support dates for more than 10,000 test products. The Industry Directory provides information on more than 500 manufacturers while the Calibration Labs Directory, shown in ***Figure 4***, lists more than 1600 calibration laboratories worldwide. A searchable library of hundreds of application notes from major manufacturers is also available online. Finally, the Glossary contains thousands of definitions and acronyms.

In short, the TestMart Web site should be the first stop for anyone trying to select the proper piece of equipment from a long list of available choices or locate information pertaining to a specific piece of test equipment, its specifications, use, price and delivery. For test equipment manufacturers and vendors TestMart provides equal access to an efficient, neutral marketplace for their products that can augment their existing marketing efforts and Web initiatives. Using TestMart, manufacturers can increase their exposure while avoiding the costs traditionally associated with selling their products through direct means and through manufacturers' representatives.

TestMart is located on the Web at www.testmart.com and is offered free of charge for interested users. Locating and selecting test equipment have never been easier.

**TestMart,**
**San Bruno, CA (650) 624-0525.**

***Circle No. 305***

# HIGH IP3 MIXERS

When your wireless communications system calls for very low intermodulation distortion and enhanced dynamic range, look into **Synergy's** new line of ***HIGH IP3 MIXERS***. Standard models are available in specialized frequency bandwidths covering UHF, Cellular, PCS and ISM bands. Additional features are low conversion loss and high interport isolation. Most models operate at +17 dBm of local oscillator drive level and exceed +30 dBm of input third order intercept point. Higher L.O. drive level models with higher third order intercept points are also available.

Don't compromise performance...
specify **Synergy's *HIGH IP3 MIXERS***.

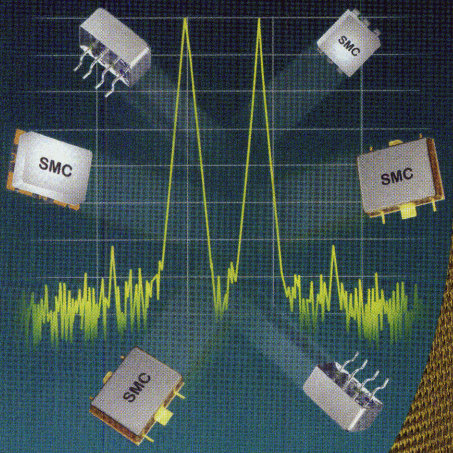


**For additional information, contact Synergy's sales and application team:**

**Synergy Microwave Corporation**
**201 McLean Boulevard, Paterson, NJ 07504**
**Tel: (973) 881-8800 ❖ Fax: (973) 881-8361**
**E-mail: sales@synergymwave.com**
**Web site: www.synergymwave.com**

SYNERGY® MICROWAVE CORPORATION

# COMPONENTS

## Chip on Board IC Control Switch

The model ASOO6M2-93 single-pole, double-throw switch is manufactured in small packages for greater freedom in layout and circuit design and features reduced parasitics, enabling the same package to be used for applications from DC to 6 GHz without degradation in performance. The switch offers higher isolation performance than traditional multiple plastic-packaged devices. Typical applications include low frequency, broadband test equipment, 5 to 6 GHz wireless data radios, electronic toll collection and wireless local loop systems operating above 2 GHz. Prices: start at $5.75 (1000). (Prices vary depending on product and quantity.)



***Alpha Industries,***
***Woburn, MA (800) 290-7200, ext. 306 or (508) 894-1904.***

**Circle No. 215**

## Miniature PIN Diode Switch

The model SW-2184-1 single-pole, single-throw driverless, reflective PIN diode switch operates over the 300 MHz to 20 GHz frequency range. At a bias voltage of –10 V, maximum insertion loss varies between 1.0 dB below 1 GHz and 2.5 dB at 20 GHz. At a bias current of +35 mA, minimum isolation varies between 45 dB below 1 GHz, 85 dB at 10 GHz and 70 dB at 20 GHz. The switch provides fast switching delay of 10 ns and SWR is 2.1 (max). Size: 0.79" × 0.88" × 0.48". Weight: 1.1 oz.



***American Microwave Corp.,***
***Frederick, MD (301) 662-4700.***

**Circle No. 216**

## Ultra-low ESR Microwave Capacitors

The 6000 series microwave capacitors offer a typical low equivalent series resistance (ESR) of 80 mΩ at 1 GHz with capacitance values ranging from 0.1 to 100 pF. Designed for cellular base station equipment, high Q frequency source and broadband wireless service applications, the NPO capacitor supports requirements where low loss and high performance are critical. Packaged in a 0603 case size, the capacitors are designed to meet and exceed requirements of EIA-198, MIL-C-55681 and MIL-C-123. All units are available laser marked and in tape-and-reel. Delivery: stock.



***American Technical Ceramics (ATC), Huntington Station, NY (613) 622-4700.***

**Circle No. 217**

## 869 - 894 MHz Circulator

The model BU122 circulator for multicarrier power amplifiers operates over the 869 to 894 MHz frequency range. The circulator provides –75 dBc (min) of intermodulation distortion performance at eight tones at 120 W average power level. Isolation is 23 dB (min), insertion loss is < 0.2 dB and SWR is 1.15 (max). Other power levels and frequency ranges also are available.



***Channel Microwave Corp.,***
***Camarillo, CA (805) 482-7280.***

**Circle No. 218**

## Miniature High Power Coaxial Remote Terminations

The model 12-5021 miniature high power coaxial remote terminations are designed specifically for applications where high power terminations are required to be remotely located and connected to an RF system via a coaxial cable. The terminations feature integral cable inputs and are well suited for isolator, coupler and dummy load applications. Average power handling is 150 W CW and operating temperature range is –55° to +100°C (full power). The units decrease the number of interconnections in systems at reduced costs over a discrete cable and termination approach. Coaxial cable lengths from 1" to 100" are available.



***Florida RF Labs Inc.,***
***Stuart, FL (800) 544-5594 or (561) 286-9300.***

**Circle No. 219**

## SP8T PIN Diode Switch

The F9180 series low cost, broadband SP8T PIN diode switches operate over the 1 to 18 GHz frequency range with a ±5 or +5 V DC and –12 to –15 V DC power supply. For the reflective design, insertion loss varies from 60 dB at 1 GHz to 50 dB at 18 GHz and corresponding values for the nonreflective designs are 2.0 and 4.2 dB, respectively. Isolation varies from 60 dB at 1 GHz to 50 dB at 18 GHz and SWR limit ranges from 1.7 to 2.0 depending on frequency. Switching speed is less than 200 ns and operating temperature range is –55° to +110°C withstanding power levels as high as 75 W (pk). Individual port TTL logic control and power supply connections are made by means of a DA15P connector. Size: 4.65" × 1.50" × 0.75". Weight: 8.5 oz.



***General Microwave Corp.,***
***Farmingdale, NY (631) 630-2000.***

**Circle No. 220**

## Parallel Board-to-board SMT Connectors

The FX10 series parallel board-to-board surface-mounted connectors offer increased transmission speeds at only 4 to 5 mm between boards via ground plenums on both mating assemblies. Ground stability is achieved with direct connection of the ground plenums to the board; signal contacts are 0.5 mm spacing with ground plenum contacts every 10 contact positions. (Additional stability is provided with board solder brackets.) Ground plenums and contacts have effective wipe lengths of 1 mm/min, thereby assuring a reliable interconnection. Designed specifically for portable and miniature electronic applications, the connectors are available in a variety of contact positions (with or without positioning posts) and sizes of 80, 100, 120 and 140. Price: $2.42 (100-position OEM lots). Delivery: six to eight weeks.



***Hirose Electric (USA) Inc.,***
***Simi Valley, CA (805) 522-7958.***

**Circle No. 221**

## Between Series Adapters

The GPO™/SMA between series adapters provide a convenient and efficient transition between two popular connector designs. The GPO is a popular push-on connection method where harsh mechanical environments of shock and vibration exist. The models 5190 through 5193 provide a maximum SWR of 1.20 from DC to 18 GHz.



***Inmet Corp.,***
***Ann Arbor, MI (888) 244-6638.***

**Circle No. 222**

## DCS Fullband Duplexer



The model WSD-00064 high performance, digital communication system (DCS) fullband duplexer is configured with a receive passband of 1710 to 1785 MHz and a transmit passband of 1805 to 1880 MHz. Insertion loss within the passband is 1.3 dB (max) and passband return loss is 15 dB (min). Antenna to receive rejection is 60 dB (min) from DC to 1620 MHz, 25 dB (min) from 1620 to 1690 MHz, 85 dB (min) from 1805 to 1880 MHz, 45 dB (min) from 1880 to 3800 MHz and 30 dB (min) from 3800 to 12,750 MHz. Transmit to antenna rejection is 85 dB (min) from DC to 1780 MHz, 60 dB (min) from 1970 to 3800 MHz and 30 dB (min) from 3800 to 12,750 MHz. Passband to passband isolation is 8 dB. The unit is well suited for macro or micro DCS base stations, repeaters and systems, or handset DCS test system applications. Operating temperature range is –20° to +70°C. Connectors are DIN 7/16 female at the antenna port and N-F at the receive/transmit ports. Size: 8.36" × 5.75" × 1.77", excluding connectors.

***K&L Microwave Inc.,***
***Salisbury, MD (410) 749-2424.***
**Circle No. 223**

## Contactless Phase Shifter

The models KPH900SCL000 and KPH900-SCL001 contactless phase shifters (CPS) cover frequency ranges up to 3 GHz and provide 90° of minimum incremental phase shifting at 2 GHz and maximum electrical delay of 125 picoseconds. Insertion loss is 0.15 dB at 1 GHz, 0.25 dB at 2 GHz and 0.35 dB at 3 GHz and SWR is 1.25. The model KPH200SCL000 drop-in type CPS provides 30° of minimum incremental phase shifting at 2 GHz and maximum electrical delay of 41.7 picoseconds. The phase shifters reduce time and complexity in production, making them well suited for applications that require phased signals.



***KMW Inc., Cerritos, CA (562) 926-2033.***
**Circle No. 224**

## Drop-in Isolators and Circulators

The model DNF1900-T0038A miniaturized isolator operates over the 935 to 960 MHz frequency band and minimizes printed circuit board space, lowering the overall cost of cellular base stations. (Miniaturized circulators also are available.) Available in either surface-mount (gull wing) or drop-in configurations, the units offer isolation of 23 dB, insertion loss of 0.4 dB and SWR of 1.15. The units are housed in 0.750-inch packages without jeopardizing performance, as compared to the standard one-inch packages. Operating temperature range is –40° to +85° with processing temperatures up to 235°. Delivery: stock to 30 days.



***Mica Microwave Corp.,***
***San Jose, CA (408) 363-9200.***
**Circle No. 226**

## Drop-in Isolator

The model DSW1042-A drop-in isolator for base station power amplifier applications is available in PCS 1900, DCS 1800, EDSM, AMPS and UMPTS frequencies. The isolator offers good performance specifications and includes integrated termination, reverse power detector with TTL output compatibility and high torque SMA connectors. The DSW1042-A is factory-configurable to meet custom specifications.



***TRAK Communications Ltd.,***
***a TRAK Communications company,***
***Dundee, Scotland +44 (0) 1382 833 411.***
**Circle No. 263**

## High Performance Cable Assemblies

These high performance, semi-rigid, preformed build-to-print cable assemblies maintain electric parameters, including SWR of < 1.25 to 18 GHz. Phase and amplitude matching are available. The company offers competitively priced products as well as a large connector inventory, reducing lead times.

***RFCircuits Inc.,***
***Hatboro, PA (215) 675-8003.***
**Circle No. 266**


THE FUTURE OF TUNERS IS PREMATCHING

See us at MTT-S 2000
Booth 304
June 13-15, Boston, MA



Prematching Tuners for High VSWR Load Pull Testing

PMT is a new family of programmable tuners, which uses two independent RF probes to generate very high VSWR (~200:1). PMT allows load pull testing of high power transistors without using quarter wavelength transformers.

Programmable Prematching offers several advantages, such as:

- Adjustable target tuning area
- High calibration accuracy
- High power handling
- High instantaneous bandwidth

Focus microwaves
970 Montee-de-Liesse, Ville St-Laurent, Quebec, H4T 1W7
Tel: (514) 335-6227 Fax: (514) 335-6287
E-mail: info@focus-microwaves.com
www.focus-microwaves.com

# NEW PRODUCTS

## AMPS Band Transmit Filter



The model AFB-21A-8689-01 AMPS band transmit filter provides highly selective receive band filtering while delivering more than 75 dB of isolation in the 824 to 849 receive band. Passband insertion loss is 1.0 dB (max) and 0.7 dB (typ). Designed to pass through the full 869 to 892 MHz AMPS transmit band, the filter has power ratings of 500 W CW, 10 kW (pk) with multicarrier power capabilities of 20 carriers at 25 W each. Type-N connectors are standard, and 7/16 DIN connectors are available as an option.

***Narda Microwave-West, a dicision of L-3 Communications, Folsom, CA (916) 351-4500.***

**Circle No. 231**


WHEN PRECISION COUNTS...



EMF Oscillators

EMF Systems, Inc. designs, develops, and manufactures Solid State Oscillators for both the military and commercial markets. Our expertise has been applied to some of the most advanced electronic systems in present use. Please call our engineers with your technical specifications in the area of Solid State Microwave and Associated Circuitry. At EMF, your call gets a quick response.

EMF Systems, Inc.

VCO's



Dielectric Resonator Osc.



Crystal Oscillators



Phase Locked Oscillators



Frequency Synthesizers



Combline Generators



**SPECIAL CUSTOM PRODUCTS** include:
Multiple Frequency Sources, Up/Down Convertors, Radar Simulators, Multipliers, Broadband Linearized VCO's, Receivers and More.

EMF SYSTEMS, INC.

120 SCIENCE PARK, STATE COLLEGE, PA 16803
PHONE 814-237-5738 • FAX 237-7876 • WEB emfsystems.com


## High Power Reactive Signal Sampler



The model HX-10N 500 W sampler-detector consists of a low loss coaxial transmission line to which a reactive probe is loosely coupled. A small portion of the RF energy in the main line is coupled by the probe loop to the auxiliary output via a detector diode. The coupling between the probe and the main line is continuously adjustable and can be locked at any convenient position. A common application is to connect the sampler-detector to the load port of the transmit isolator. When reflected power exceeds a predetermined level, the pre-set detected output will sound the alarm.

***Microlab/FXR, Livingston, NJ (973) 992-7700.***

**Circle No. 227**

## 1.0 - 18 GHz SPST Nonreflective Switch



This broadband 1.0 to 18 GHz SPST nonreflective switch features –60 dBm in band video transients, a 9-PIN mini D connector and two nonreflective ports with 1 W of hot switching. Switching speed is 30 ns and voltage supply is +5 V at 90 mA and –15 V at 70 mA. Isolation is 60 dB and insertion loss is 3.5 dB. The switch is best suited as a pulse modulator for test equipment, a robust bench-top switch for automatic testing equipment or a high linearity switch for electronic warfare applications. Size: 1.10" × 1.10" × 0.42".

***Micronetics Wireless Inc., Hudson, NH (603) 883-2900.***

**Circle No. 228**

## Channel Filter Assembly

The Merrimac 14 channel filter assembly operates over the 2.53 to 5.26 GHz frequency range and contains 14 seven-pole, stripline Chebyshev hairpin resonator filters. Phase match between odd and even filters is ±45° at ±50 MHz crossover points with a power supply of 1.0 W. Input/output return loss is 10 dB (min) and input/output impedance is 50 Ω (nom). Operating temperature range is –65° to +125°. Size: 1.50" × 2.90 × 0.13".

***Merrimac Industries Inc., West Caldwell, NJ (888) 434-6636.***

**Circle No. 225**

## Single-channel ENG Bandpass Filter

The model 12861 single-channel electronic news gathering (ENG) bandpass filter operates over the 1990 to 2110 MHz frequency range and has an 8 MHz bandwidth, providing less than 3.5 dB of insertion loss at center frequency. The unit offers greater than 25 dB of rejection at ±7 MHz from center frequency, thereby providing selectivity to remove undesired or interfering frequencies. (For greater out-of-band frequencies, the unit offers either 8 or 16 MHz bandwidths and additional sections.) Designed for indoor applications, the unit also can be modified for outdoor use. Connectors are 50 Ω type-N female, but other connectors are available upon request.

***Microwave Filter Company Inc. (MFC), East Syracuse, NY (800) 448-1666 or (315) 438-4747.***

**Circle No. 229**

## Ultraminiature Switch Connector

This ultraminiature SWD switch connector is designed specifically for use in testing wireless equipment and operates in the licensed or unlicensed DC to 6 GHz frequency bands. The switch connector employs an ultraminiature, surface-mountable receptacle with integrated mechanical switching functions and a choice of test probes, making it well suited for use in troubleshooting RF circuits or performing automated system checks in a high speed process in factories. Insertion loss is 0.1 dB (max) without adapter. Available on tape-and-reel, the unit offers the capability of easy measurement of radio board characteristics from outside of the portable device's case. Price: 45¢ to 55¢ in moderate quantities (10,000 to 25,000).



***Murata Electronics North America Inc. (MENA), Smyrna, GA (770) 433-5782.***

**Circle No. 230**

## Biphase Modulator/Shifter

The model PS-90-0612 miniature, single-balanced biphase modulator/shifter provides ±90° or 180° of phase shifting (±10) over the 6 to 12 GHz frequency range. (Double-balanced options also are available.) Other frequencies from 2 to 18 GHz are available in octave bandwidths. Insertion loss is 2.5 dB and SWR is 2.0 (typ). The biphase modulator/shifter operates from +5 V DC at +75 mA and –5 V DC at –20 mA (max), and offers rise and fall times of 20 ns and 10 ns, respectively, and 60 ns delay on and 45 ns delay off. (High speed 25 ns units also are available.) Output logic is TTL, but ECL also is available. Size: 2.00" × 0.79" × 0.54".



***Planar Monolithics Industries Inc. (PMI), Frederick, MD (301) 662-4700.***

**Circle No. 232**

## Microwave Assembly

The model MP4269 switch filter bank integrates seven switched bandpass filters that operate over the input frequency range of 0.45 to 20.1 GHz and a passband range of 0.45 to 8.05 GHz. Passband insertion loss is 5.5 dB (max), passband-to-passband variation is 1.5 dB (max) and differential group delay is 10 ns. Channel-to-channel isolation is 60 dB (min), SWR (at all ports) is 1.8 and input third-order intercept is +30 dBm (min). Logic is CMOS compatible. Operating temperature range is 0° to 70°C with power supply voltages of +5 or –15 V. Size: 5.00" × 4.00" × 0.50", excluding SMA field-replaceable connectors.

***Robinson Laboratories Inc., Nashua, NH (603) 880-7880.***

**Circle No. 233**

## Dual-band Quadrature Hybrid



The model FH6370-1 dual-band quadrature hybrid handles 200 W CW of power while operating over the 800 to 2400 MHz frequency


# Custom Diplexers

MDC offers a vast line of coaxial diplexers and filters for PCS base stations and other wireless applications.

Our extensive simulation and optimization tools, coupled with our state-of-the-art large volume manufacturing facility, allow MDC to produce the optimum in performance and price.

Let MDC customize your next diplexer requirement.



**MICROWAVE DEVELOPMENT COMPANY, INC.**

Forty One Northwestern Drive
Salem, New Hampshire 03079
Sales: (603)-870-6280 • Fax: (603)-870-6210
E-Mail: microwav@mdc.usa.com
www.mdc-inc.net

EST. 1961 MDC

# NEW PRODUCTS

range. Insertion loss is 0.2 dB (typ), SWR is 1.22 (max) and isolation is 20 dB (min). Typical applications for the quadrature hybrid include antenna feeds and amplifier combing in telecommunication base stations. Type-N female connectors are standard, but alternate connector requirements are available upon request. Size: 5.60" × 1.50" × 1.00".

***Sage Laboratories Inc.,***
***Natick, MA***
***(508) 653-0844.***

***Circle No. 234***

## DC - 3 GHz GaAs SPDT Switch

The model IS-2103 GaAs SPDT switch covers the DC to 3.0 GHz frequency range with isolation of 50 dB. Switching speed is 2 ns, insertion loss is 0.7 dB and typical third-order intercept is +49 dBm. The switch is well suited for next-generation applications where package size and performance are critical. Housed in a SOIC-8 plastic surface-mount package, the unit is available on tape-and-reel for automated assembly. Price: $1.48 (1000-2499).




***Signal Technology Corp., Olektron Operation, Beverly, MA (978) 524-7444.***

***Circle No. 235***

## Connector and Ground Kit Attachment



The LMR® flexible coaxial cables now include prep (strip) tools, which simplify preparation of the cable end for connector attachment by easily removing the cable jacket and exposing the center conductor to the exact dimensions required; deburring tools, which remove burrs or sharp edges remaining on the end of the center conductor; heavy duty precision crimp tools and interchangeable dies for years of reliable service; and midspan strip tools, which prepare the cable for attaching the ground kit by carefully removing the outer polyethylene jacket without damaging the underlying shield. The LMR cables are well suited for use as antenna feeders, system jumpers and interconnects.

***Times Microwave Systems, Wallingford, CT (203) 949-8489.***

***Circle No. 236***


**sspa** MICROWAVE CORPORATION (ISO 9001 registered)

"Solid State of the Art" *Satellite Microwave Technology*





SSPA MICROWAVE CORPORATION is a recognized leader in the microwave **solid state power amplifier** industry.

We have over 23 years experience in designing and manufacturing SSPAs for telecommunications, aerospace and military applications worldwide.

**SSPA Microwave Features**

✔ Available frequency range of 1 GHz to 18 GHz

✔ C-band SSPAs: Output power up to 300 W

✔ Ku-band SSPAs: Output power up to 125W

✔ Single or redundant systems.

✔ SSPAs available as modules, indoor rack-mount assemblies, or outdoor hub-mount assemblies.

✔ Standard product line or customized units for your particular specifications and needs

✔ Competitive prices!

Put our expertise and experience to work for you.
Call us today for a quotation!

**sspa MICROWAVE CORPORATION**
7420 Pacific Circle, Mississauga, Ontario, Canada L5T 2A4
Tel.: (905) 565-0558 ❖ Fax: (905) 565-0588
e-mail: marketing@sspamicrowave.com
Website: http://www.sspamicrowave.com


## Precision Trimmer Capacitors

The model V6152 sapphire dielectric has been added to the company's line of dual-tracking precision trimmer capacitors to work in the gigahertz range. The tuning screw of the split-stator style adjusts two capacitors at the same rate, and the capacitors have one common terminal. The V6152 measures 0.48" long, tunes from 0.5 to 3.5 pF and can be used over 2 GHz. At 250 MHz, Q is over 1500. The unit also can be fine-tuned with more than 10 full turns. Price: $16 (1000). Delivery: four weeks.



***Voltronics Corp., Denville, NJ (973) 586-8555.***

***Circle No. 238***

## Miniature 75 Ω SMB Edge-mount PCB Connectors

These 75 Ω SMB matched-impedance connectors feature an air-dielectric interface that allows the envelope dimensions to conform to the miniature size of MIL-PRF-39012 SMB series connectors. The convenient snap-on mating and small size make them ideal for use

in applications requiring dense packaging. The connectors fit on the edge of a PCB up to 0.062"" thick and are soldered directly to the board circuitry without drilling. The connectors also can replace more expensive conventional right-angle types, and are constructed with brass bodies and contacts and Teflon insulators. All metal parts are gold plated to meet MIL-PRF-39012 requirements.
***Applied Engineering Products (AEP), New Haven, CT (203) 776-2813.***
**Circle No. 270**

## RF Coaxial Panel Jack

The model 7-16 EL RF coaxial panel jack features a connector body that measures 1.25-inches from the flange to easily attach cables and a large center conductor access hole to simplify soldering. Available for 0.141-inch and 0.250-inch semi-rigid cable, the panel jack has a direct solder inner and outer center conductor with a solid outer ring. The panel jack is manufactured with silver-plated or Tru-Lustre™ tri-metal brass bodies, silver-plated beryllium copper female contacts, and silver- or gold-plated brass male contacts. Designed specifically for cellular base station antenna, telecommunication and related equipment applications, the 7-16 EL offers –155 dBc typical intermodulation and is rated up to 2700 V rms with 50 Ω impedance. Price: $12.95 (1000).
***Tru-Connector Corp., Peabody, MA (978) 532-0775.***
**Circle No. 237**



## Low Intermodulation 50 W Load

The model 50-T-FN 50 W load offers low intermodulation for cellular and PCS applications. Typical intermodulation for the cellular band is –116 dBc when tested at +43 dBm; typical intermodulation for the PCS band is –121 dBc when tested at +43 dBm. The load has a frequency range of DC to 4 GHz with SWRs of 1.10 (DC to 1 GHz) and 1.25 (DC to 4 GHz). Connector options are BNC, IEC 7/16, N type and TNC.
***BCP, Largo, FL (727) 547-8826.***
**Circle No. 271**



## Programmable Attenuators and Interfaces



The model 8210A SmartStep™ interface provides a flexible, low cost solution for the control and operation of electromechanical switches and programmable step attenuators using standard communications interfaces. The 8210A is designed specifically to interface with SmartStep programmable attenuators, providing a high level interface from various industry standard communications interfaces, including IEEE-488 and RS232/RS422/RS485. The SmartStep technology streamlines system design and device integration by providing a flexible bus interface as well as components that are simple to configure and control.
***Weinschel Corp., Frederick, MD (800) 638-2048 or (301) 846-9222.***
**Circle No. 239**

## Improved Cables

HELIAX® cables now provide enhanced electrical performance due to improvements in the closed cell foam dielectric design and refinements and advances in the company's cable manufacturing process. For example, at 894 MHz, HELIAX LDF7-50A (1-5/8") cable now has 0.71 dB/100 feet attenuation, a 0.6 dB improvement. At 2 GHz, the cable offers 1.17 dB/100 feet attenuation, a 0.08 dB improvement.
***Andrew Corp., Orland Park, IL (800) 255-1479.***
**Circle No. 269**



*[Continued on page 181]*




# Only Raltron has it all...

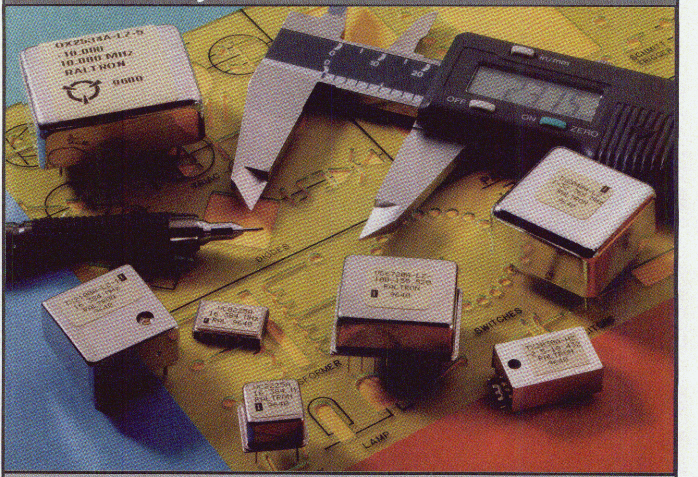


## CLOCKS

Frequency Range to 160 MHz
Tolerance and Stability to ± 10 PPM
Temperature Range -55°C to 125°C
+3.3 Volt Option (HCMOS)
Enable / Disable Option
Through Hole and SMD Configurations

## VCXO'S

Frequency Range to 2.48 GHz
Tolerance and Stability to ± 10 PPM
Temperature Range -55°C to 125°C
+3.3 Volt Option (HCMOS)
Enable / Disable Option
Through Hole and SMD Configurations

## TCXO'S

Frequency Range to 160 MHz and Higher
Stability to ± 0.3 PPM
Wide Temperature Range
Low Phase Noise
Through Hole and SMD Configurations

## OCXO'S

Frequency Range to 100 MHz
Frequency Stability to ± 1.0 PPB
Temperature Range -40°C to 85°C
Excellent Short and Long Term Stability
Enable / Disable Option
Through Hole and SMD Configurations

**RALTRON**

10651 NW 19th Avenue
Miami, Florida 33172 U.S.A
Tel: 305-593-6033
Fax: 305-594-3973
e-mail: sales@raltron.com
Internet: http://www.raltron.com

*A Worldwide Manufacturer of:*

√ Microprocessor Crystals
√ Oscillators
√ Crystal Filters
√ Ceramic Resonator
√ Saw Devices
√ VCO Products

# NEW PRODUCTS

## High Performance Transformers



These HDSL2 transformers are optimized for level one SK70740/-41/-42 and other 1IDSL2 transceiver chip sets. The model H27650-A and surface-mount model H27695-A transformers are among the smallest available with a footprint of 0.650" × 0.675" × 0.350" (16.5 × 17.2 × 8.0 mm). The company's HDSL2 magnetics are engineered for minimum DC resistance (1.5 to 5 Ω) and very low leakage inductance (15 µH, typ). Primary inductance with and without bias is stable from –40° to +85°C. Return loss is 13 to 15 dB at 320 kHz and typical longitudinal balance at 40 kHz is rated at 65 dB. All parts are designed to meet UL 1459 and UL1950 requirements. Price: $1.80 (10,000). Delivery: stock.

***Coilcraft, Cary, IL (847) 639-6400.***

***Circle No. 272***

## Coaxial Relay



The model 76A00 coaxial relay incorporates a built-in RF or video amplifier that is convenient when assembling nonblocking matrices or when a gain block is needed in conjunction with a coaxial relay. The module is self-terminating, allowing it to mate with power splitters (which always need to be terminated). In addition, the unit can be used independently or incorporated in the company's model 11600 controller chassis, which provides RS-232, RS-422, IEEE-488 and keypad control. The relay's frequency response of DC up to 800 MHz makes it ideal for switching wideband RF/IF or fast rise video/pulse signals.

***Matrix Systems,***
***Calabassas, CA (818) 222-2301.***

***Circle No. 275***

## Low Loss, High Linearity MOSFET Quad Mixer

The model PE4120 high linearity MOSFET quad mixer is a passive broadband device that performs functions ranging from frequency conversion to phase detection at up to 2.5 GHz. A conversion loss of only 6 dB across its entire operating frequency range of 500 MHz to 2.5 GHz makes the unit ideal for such applications as cellular/PCS telephone network base stations and cable modems. The device mixes a received RF signal without the output of a LO to produce an IF. Similarly, it mixes IF and LO signals to produce an RF output. Power loss during the conversion process is only 6 dB at any frequency, with a 20 dBm LO drive. Linearity is 36 dB and LO-RF isolation is 34 dB over the temperature range of –40° to +85°C. Price: $1.00 (10,000).

***Peregrine Semiconductor Corp., San Diego, CA (858) 455-0660.***

***Circle No. 278***

## 6 - 18 GHz I & Q Vector Modulator

The model M2L-68N-5 360°/20 dB PIN diode I & Q vector modulator operates from 6 to 18 GHz and offers simultaneous phase and amplitude control. Total phase error access across the entire band is < ±10° and amplitude error is < ±1.5 dB. SWR is better than 2 and insertion loss is < 12 dB. The device demonstrates a linear control input slope with output voltage and is packaged to form, fit and function as an industry-recognized standard. With monotonic performance, the device is digitally controlled via two sets (I & Q) of 12-bit, TTL-compatible, binary logic inputs and




SIVERSIMA

VCO 3-24 GHz

Ultra wide band oscillators

| Parameter | | | VCO3260S VCO3262S | VCO3260C VCO3262C | VCO3260X VCO3262X | VCO3260P VCO3262P | VCO3260K VCO3262K |
|---|---|---|---|---|---|---|---|
| Tuning range | * | GHz | 3 -5 | 5 - 8,4 | 8,4 - 13,5 | 13,5 - 20 | 20 - 24 |
| Tuning sensitivity | * | MHz/V | 50 -300 | 100 - 600 | 100 - 600 | 100 - 600 | 100 - 600 |
| Freq. vs temp. | * | MHz/C° | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 |
| FM noise@100kHz, max | * | dBc/Hz | - 90 | - 85 | - 65 | - 65 | - 65 |
| FM noise@1MHz, max | * | dBc/Hz | - 110 | - 105 | - 95 | - 95 | - 95 |
| Bias current@ 15V, max. | * | mA | | | | | |
| • VO3260 / 13 dBm | | | 200 | 200 | 250 | 200 | 200 |
| • VO3263/ 21 dBm | | | 300 | 300 | 300 | 300 | 300 |

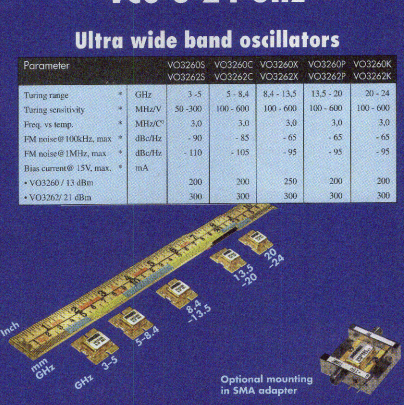


The oscillators cover the range within 3-24 GHz with a guaranteed frequency overlap. They are all fundamental frequency versions and have built-in regulators, buffers amplifiers and an output filter.

Typical applications are microwave instruments, cellular test instruments, measurements sensors, military EMC, mine detection sensors and special test set.

Sivers Ima AB
Box 1274
Torshamnsgatan 9
SE-164 29 Kista/Stockholm
Sweden

Phone: +46 (0)8 703 68 07
Fax: +46 (0)8 751 92 71

www.siversima.se

# NEW PRODUCTS

the switching speed is < 500 ns. A device with a frequency range of 2 to 18 GHz is also available.
***G.T. Microwave Inc., Randolph, NJ (973) 361-5700.***

***Circle No. 273***

## Low Cost SMT Directional Couplers

The GLSN series surface-mount directional couplers provide a selection of coupling values



from 6 to 16 dB and the compact design (5.7 × 5.7 × 4.0 mm) uses a dual-aperture ferrite core on a ceramic base. The model GLSN16D152 16 dB coupler offers a maximum loss at 20 MHz of 0.6 dB and 3 dB band limits of 0.5 to 1500 MHz. All models have an operating temperature range of –40° to +125°C. The couplers are suitable for automatic insertion into circuits assembled using reflow or vapor phase soldering. Terminals are formed from the ends of the coil windings, eliminating solder joints between the coil and the terminals that could open from the heat of circuit assembly. Price: 99¢ (production quantities). Delivery: eight to 10 weeks.
***Sprague-Goodman Electronics Inc., Westbury, NY (516) 334-8700.***

***Circle No. 280***

## 18 - 26.5 GHz Eight-way Power Divider/Combiner

The model PS8-116 eight-way power divider/combiner operates from 18 to 26.5 GHz and offers a high isolation of 17 dB (min) and low insertion loss of 2.8 dB (max) (over nominal loss). SWR is 1.6. The unit exhibits a ±0.5 dB amplitude and ±12° phase balance. It is housed in a rugged aluminum material with type SMA female connectors. Delivery: stock.



***Microwave Communications Laboratories Inc. (MCLI), St. Petersburg, FL (727) 344-6254.***

***Circle No. 276***






Wave goodbye to out of date software...

with CONCERTO

The most advanced package for 3D microwave design

Applications include

- Waveguide components
- Antennas
- Resonators
- Microstrips
- Microwave heating

For further information contact:

VECTOR FIELDS

SOFTWARE FOR ELECTROMAGNETIC DESIGN

Vector Fields Inc
1700 North Farnsworth Avenue, Aurora, Il 60505, USA
Tel: (630) 851 1734 Fax: (630) 851 2106
Email: info@vectorfields.com
Web: http://www.vectorfields.com


## Metal Oxide Varistors

These metal oxide varistor transient voltage surge suppressors are offered in seven model sizes from 5 to 20 mm (dia) and have a $V_M$ (AC/RMS) voltage range from 10 to 1000 V. Energy absorption capabilities are up to 560 joules. These radial leaded devices are ideally suited for operating continuously across the line (AC) for protecting expensive, sensitive electronic components. Prices (1000): 5¢, 5 mm size; 30¢, 20 mm size. Delivery: stock to eight weeks.



***Laube Technology, Camarillo, CA (888) 355-2823.***

***Circle No. 274***

## Surface-mount LC Filter



The model 8623 fully hermetic sealed surface-mount LC filter for wireless applications is capable of surviving high temperature reflow and aqueous cleaning requirements. The unit is centered at 6 MHz with a 1 dB passband of 300 kHz and a 40 dB stopband of ±1 MHz. The filter also features outstanding group delay performance and 50 Ω input/output resistance.
***Piezo Technology Inc. (PTI), Orlando, FL (407) 298-2000.***

***Circle No. 279***

## Lumped Element VHF Circulators

The models 3C100, 3C101 and 3C102 drop-in circulators are designed for 200 W CW input

*[Continued on page 185]*

# NEW PRODUCTS

NO.69

## RF/IF MICROWAVE COMPONENTS



FROM $4.45

### RF TRANSFORMERS HAVE 4:1 IMPEDANCE 200 TO 1400MHz

Broad band TCM4-14 surface mount RF transformers from Mini-Circuits operate in the 200 to 1400MHz band with 4:1 impedance ratio. Referenced to midband loss (0.8dB typ), insertion loss is 1dB from 800MHz to 1000MHz, 2dB in the 300 to 1300MHz range, and 3dB band wide when operated within -20°C to +85°C (max.). Open case design has plastic base with solder plated leads, and applications include impedance matching and baluns. RF power is 250mW (max.).

FEATURED PRODUCT



FROM $7.95

### 3000 TO 4000MHz MIXER IS TEMPERATURE STABLE

Higher frequency designs will benefit from Mini-Circuits patented family of MBA model Blue Cell™ mixers, which deliver a unique combination of low conversion loss, superb temperature stability, thin 0.07" profile, and low cost. This level 13 (LO) MBA-35MH model spans 3000MHz to 4000MHz with 22dB L-R, 14dB L-I isolation and low 5.1dB midband conversion loss (all typ). Operating temperature is -40°C to +85°C (max.) and applications include satellite and PCMCIA.



FROM $19.95

### 1550 TO 1720MHz VCO HAS LINEAR TUNING

The ROS-1720 voltage controlled oscillator from Mini-Circuits operates within the 1550MHz to 1720MHz band targeting PCS and DCS applications with low -141dBc/Hz SSB phase noise typical at 1MHz offset, wide 3dB modulation bandwidth typical at 18000kHz, and 28-34MHz/V (typ) linear tuning sensitivity. Housed in a miniature 0.5"x0.5"x0.18" industry standard package, typical power output is 7dBm.



FROM $12.95

### 50 TO 200MHz MAGIC-TEE OPERATES WITH LOW LOSS

Mini-Circuits has introduced a versatile 2way-0°/180° power splitter and combiner for the 50 to 200MHz band. Model AMT-2 typically has low insertion loss (0.25dB S-1 and S-2, 0.8dB J-1 and J-2), very good 1.10:1 input/1.12:1 output VSWR, plus excellent 0.1dB amplitude and 1 degree phase unbalance. Designed for 50 ohm systems, this 4 port hybrid covers IF receiver and satellite applications. Maximum power input as a splitter is 0.5W.

### 824 TO 849MHz COAXIAL AMPLIFIER FEATURES LOW NOISE

This 824 to 849MHz cellular band ZQL-900LN low noise amplifier from Mini-Circuits typically provides high 16.5dB gain (±0.2db flatness), ultra-low 1.0dB noise figure, and 22.5dBm maximum power output at 1dB compression. High +35dBm IP3 helps suppress noisy intermodulation products, and operating temperatures range from -40°C to +70°C maximum. Equipped with 50 ohm SMA-Female connectors.



FROM $229



6 pc. KIT $150

### 2W SMA ATTENUATORS AVAILABLE IN DESIGNER'S KIT

Six different DC to 18GHz fixed attenuators from Mini-Circuits "BW" series are now available at a special evaluation price in designer's kit form. Kit number K-BW2 contains units that display nominal attenuation values of 3dB, 6dB, 10dB, 20dB, 30dB, and 40dB. Built tough to handle 2W average, 125W peak power, these miniature stainless steel precision attenuators are ideal for matching, test set-ups, and instrumentation applications. Available from stock.


Mini-Circuits®

US 108 INT'L 109 CIRCLE READER SERVICE CARD

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: http://www.minicircuits.com

*WITH A LITTLE TLC ...*

# TLC "O" MMIC Chip

**The Worlds Most Versatile MMIC Chip**



- *2 to 79 GHz Operation*
- *MULTIPLIER, VCO, ILO, DRO, MIXER, AMP*
- *> 16 dBm @ 38 GHz*
- *8 dBm @ 77 GHz*
- *-100 dBc/Hz @ 100 KHz @ 77 GHz*

***The TLC "O" chip is a general purpose MMIC oscillator with an output buffer amplifier. The center frequency is voltage and mechanically tunable by plucking airbridges. Versatile option allows for higher Q restoration, injection locking, harmonic multiplication, sub-harmonic mix up and down.***

***The versatility of the TLCO01981 "O" chip oscillator makes it an excellent candidate for use in radar or communication systems from 2 to 79 GHz.***

***Patents Pending***

*... YOUR PRODUCT COMES TO LIFE*


***TLC PRECISION WAFER TECHNOLOGY, INC.***
***1618 WEST RIVER ROAD N.***
***MINNEAPOLIS, MN 55411***
***(612) 341-2795 FAX (612) 341-2799***
***Web: www.tlcprecision.com***
***E-mail: sales@tlcprecision.com***


*OUR MISSION IS TO GIVE OUR CUSTOMERS A COMPETITVE ADVANTAGE!*

CIRCLE 167 ON READER SERVICE CARD

# NEW PRODUCTS

power and operate over the 132 to 174 MHz, 132 to 154 MHz and 150 to 174 MHz frequency ranges, respectively. All models offer 18 dB (min) isolation, 0.6 dB (max) insertion loss and 1.3 (max) SWR. Return loss is 18 dB (min). Size: 1.99" × 2.54" × 0.75" (50 × 65 × 19 mm). Delivery: two weeks.
***Alcatel, Ferrocom Ferrite Products, San Jose, CA (408) 229-8171.***
**Circle No. 268**

## AMPLIFIERS

### ■ High Isolation Distribution Amplifiers



The model FE-7923A low cost,10-channel sinewave distribution amplifier operates from 1 through 10 MHz. Designed to meet stringent satellite ground station requirements, the amplifier offers low phase and amplitude noise bursts with isolation greater than 100 dB. The unit operates from a 115 V AC line or +15 V DC power supply. SWR of the input does not exceed 1.5 (referenced to 50 Ω). Various mechanical configurations and connector types are available, including 19-inch rack-mounting.
***FEI Communications Inc., a subsidiary of Frequency Electronics Inc., Mitchel Field, NY (516) 794-4500.***
**Circle No. 241**

### ■ GaAs MMIC Low Noise Amplifier



The models HMC262, HMC263, HMC281 and HMC282 low noise amplifiers (LNA) are well suited for microwave and millimeter-wave point-to-point radios, LMDS, VSAT and other SATCOM applications. The HMC262 features gain of 25 dB from 15 to 24 GHz, a single bias supply of +3 V at 36 mA with noise figure of 2 dB. The HMC263 provides gain of 23 dB from 24 to 36 GHz, a single bias supply of +3 V at 46 mA with noise figure of 2.3 dB. The HMC281 offers gain of 22 dB from an output P1dB of +9 dBm and noise figure of 2.5 dB. The HMC282 provides gain of 26 dB from 36 to 40 GHz and an output P1dB of +9 dBm with noise figure of 3.5 dB. Operating temperature range is –55° to +85°C.
***Hittite Microwave Corp., Chelmsford, MA (978) 250-3343.***
**Circle No. 242**

### ■ 40 W RF Power Amplifier



The model GRF2030DC high power, solid-state RF power amplifier utilizes linear power devices that provide good linearity, high gain and wide dynamic range. Designed for linear applications in the PCS frequency range, the amplifier also features a built-in, voltage-regulated bias supply and electromagnetic and RF interference filters. High efficiency operation is achieved by employing unique microstrip networks and advanced GaAs FET devices.
***Ophir RF, Los Angeles, CA (310) 306-5556.***
**Circle No. 243**

### ■ CDMA Amplifier

The model AMT-1930-016 class A/B amplifier is designed as a single carrier amplifier for use in base stations. The fully integrated amplifier features alarms and cooling while delivering 16 W of average power and 31 dB of gain. Size: 10.2" × 10.3" × 8.80".

*[Continued on page 187]*


A.R.A.
Antenna Research

Antennas and Accessories

100 Hz to 40 GHz

First in Line ..... for

Radio Monitoring, Radio Location



SIGINT, ELINT, DF, HF/VHF/UHF

Global Communication




TELECOM, PCS, GPS, PCN, DECT, WLAN



11317 Frederick Ave., Beltsville, MD 20705; Phone: 301-937-8888 * Fax: 301-937-2796
For a free brochure or a quote, please contact us at: **1-877-ARA-SALE** or **sales@ara-inc.com**
Visit our website at: **http://www.ara-inc.com**

**ALUMINUM DIP BRAZING**

COMPLEX WAVEGUIDE
ASSY, TUNING AND TESTING
PASSIVE W/G COMPONENTS
TEE, TWIST, TERMINATION
CUSTOM ENCLOSURES
LIGHTWEIGHT THIN WALL
EMI/RFI/PRESSURE SEALED
HEAT EXCHANGERS
THIN FIN, AIR & LIQUID

**TEXAS BRAZING INC.**
400 E. HWY 80
Forney, TX 75126
FAX 972-552-3706 PH 972-226-9724
E-mail: tbi.sales@usa.net

CIRCLE 162

**FILTERS**
*High Performance Filters and Diplexers*
*DC – 40 GHz*
Surface Mount • Combline • Miniature • Custom Ceramic
Low Pass • High Pass • Band Pass • Band Stop
*Call for your free filter catalog!*



**MICROWAVE CIRCUITS, INC.®**
6856 Eastern Avenue, NW Phone 202 829 3030
Washington, DC 20012 Fax 202 829 2639
e-mail: filters@mickts.com
Website: www.mickts.com
© 1998 MICROWAVE CIRCUITS, INC. ALL RIGHTS RESERVED

CIRCLE 72

**SSPA RADIO LINK**
**TWT REPLACEMENT KITS**



**Stealth Microwave**
A Division of SSB Technologies Inc.
1007 Whitehead Road Ext. Trenton, NJ 08638
Tel: 609-538-8585 • Fax: 609-538-8587
Email: sales@ssbtech.com
Visit us on the Web: www.ssbtech.com

CIRCLE 156

**Filtel MICROWAVE INC.**
*The RF and Microwave Solution*



**FILTERS AND DIPLEXERS**
**UP TO 40 GHz**
High Performance, High Quality at Low Cost
**FILTEL MICROWAVE INC.**
*342 Alain Vincent, Quebec, Canada, J7V5V5*
*TEL: (450) 455-6002/FAX: (450) 424-5819*

CIRCLE 45

**LABTECH**
**www.labtechcircuits.com**



leaders in high technology microwave PCBs
email: sales@labtechcircuits.com

CIRCLE 66

**LOW NOISE AMPLIFIERS**




**SATELLINK, INC.**
3525 MILLER PARK DR
GARLAND, TEXAS 75042
FAX (972) 487-1204 PH (972) 487-1434
E-mail: info@satellink.com

CIRCLE 145

**Microwave Filter Co., Inc.**




800-448-1666 • 315-438-4700
Fax: 315-463-1467
Toll Free Fax: 888-411-8860
http://www.microwavefilter.com
e-mail: mfcsales@microwavefilter.com

CIRCLE 77

**WAVEGUIDE & COAXIAL SWITCH SPECIALISTS**



**SWITCH OVER TO:**
**SECTOR MICROWAVE INDUSTRIES, INC.**
999 Grand Blvd., Deer Park, New York 117229
(516)242-2300 · Fax: 516-242-8158
Request your "R-F Switch slide Guide" today!

CIRCLE 146

**TSAT**
**Ku to L-band Transceiver, 2 W**



Completely Integrated, total weight 2 kg
- HPC, OMT, TRF, LNC.
- Microcontroller

Two cables Interface:
- Rx IF 10 MHz ref and 24 DC
- Tx, HPA on/off

For more information:
Tel: +47 23 03 73 60 • Fax: +47 23 03 73 61
e-mail: info@tsat.no
**www.tsat.no**

CIRCLE 170

# NEW PRODUCTS

*American Microwave Technologies (AMT), Anaheim, CA (714) 456-0777.*

Circle No. 240

## Medium Power GaAs FET Amplifiers

The models PA2010/SMP2010 low cost, medium power GaAs FET amplifiers operate in the 200 to 2000 MHz frequency range while generating up to +25.5 dBm for 1 dB compression point. Third-order intercept is +33 dB and small-signal gain is 10 dB. Hermetic packaging is available in both TO-8 and surface mount. An SMA connector version is available as an option.



*Stellex Microwave Systems Inc., Palo Alto, CA (800) 321-8075.*

Circle No. 244

## 36 – 40 GHz High Power Amplifier

The model CHA5094 high gain, three-stage monolithic high power amplifier is designed for a range of applications, including military and commercial communication systems. Available in chip form, the circuit is manufactured with a pHEMT process. 0.15 µm gate-length via holes through the substrate, air bridges and electron beam gate lithography. The backside of the chip is both RF and DC grounds, thereby simplifying the assembly process. Output power is 28 dBm with 11 dB ±1 gain. DC power consumption is 1.3 A at 3.5 V. Chip size: 4.51 mm × 2.60 mm × 0.05 mm.

*United Monolithic Semiconductors (UMS), Orsay, Cedex, France +33 (0) 1 69 33 03 35.*

Circle No. 265

## C-band and Ku-band Power Boosters

These C-band and Ku-band power boosters include control and protection functions and consist of three major subsystems: the RF amplifier, a power supply unit and a cooling system. The amplifier section contains all of the necessary DC power conditioning circuitry for bias and sequencing of the RF amplifier devices as well as over-temperature protection, RF power detection, mute control and gain drop detection. Gain flatness is ±1 dB (max) and SWR is 1.5 (max). Designed specifically for use in very small aperture terminal applications, the unit's innovative mechanical design features high thermal dissipation efficiency with 12° to 15°C rising temperature, resulting in a higher MTBF number.



*Wavesat Telecom Inc., Ville St-Laurent, Quebec, Canada (514) 956-6300.*

Circle No. 245

# ANTENNAS

## Millimeter-wave Sector Antennas

The WavShapr™ antennas are available for 24, 26, 28, 31 and 38 GHz operation with ultra-low cross-polarization. Designed using internally developed genetic optimization techniques that result in good antenna performance, the antennas offer extremely flat amplitude within the azimuth coverage region and extensive sidelobe suppression outside the sector. The WavShapr antennas are low profile, rugged and significantly outperform traditional sector antennas. Uniform power density is provided by a highly controlled cosecant elevation pattern throughout a 45° downtilt. Available in horizontal or vertical polarizations, the antennas offer SWR of 1.5 and maximum RF input power of 10 W.

*Endgate Corp., Sunnycale, CA (408) 737-7300.*

Circle No. 261

## 300 MHz – 3 GHz Log Periodic Dipole Array Antenna

The model EM-6946 log periodic dipole array antenna offers an exceptional combination of frequency coverage and high power handling capability without compromising the consistent performance vs. frequency that makes the log periodic antenna so desirable for test applications. The rugged antenna is powder coated,

[Continued on page 188]




# ...Your Career

***General Manager:*** Three hundred million dollar RFIC GaAs MMIC company has need for a GM to lead them into a IPO startup company. Individual must possess experiences leading a multi billion effort to spin off RFIC business into a separate company. Candidate must possess an aggressive, energetic, positive personality, management and technical understanding of the fastest growing wireless communication technology of RFIC business practices.

***Dir. of Business Dev. & Marketing:*** A leading RFIC commercial wireless technology division is a fortune 500 environment seeks an incentive motivated, technical expert with experience in business process plan to expand its existing presence in the RFIC GaAs and SiGe semiconductor industry. This individual will report directly to the division president/general manager. Your duties will include cutting edge leadership, implementation of strategies; ability to integrate existing team with new recruits, a clear understanding of purpose and implementation of your philosophies to motivate the existing three individual business centers to achieve individual successes in the commercial RF/Microwave wireless communications industry. Compensation package will be open to your abilities and successes. BSEE/MSE or equal experience. Individual must possess winning attitude and a motivational "hands-on" approach to succeed in this position.

***Project Leader/Project Manager:*** Project leader in charge of development of new node and amplifier products for the CATV market. Ability to lead in engineering environment dealing with marketing, application engineering and manufacturing. CATV/Amplifier development, RF, optical, and or digital design experience. Technical knowledge of CATV or Broadband HFC Systems. BSEE or MSEE. MBA a plus.

***RF Power Amp Design:*** Design and develop high-efficiency low-voltage SiGe power devices and amplifiers for cellular/PCS applications. Requirements include MS or PhD and experience in MMIC or RFIC design and test along with 5+ years experience in bipolar and GaAs power amp design.

***RFIC Designers:*** Hands-on engineers specializing in GaAs, SI, SiGe etc. circuit design. Design centers are located throughout the US and internationally. The companies we represent will sponsor citizenship. All our client companies are successful RFIC technology leaders. All levels of engineering technology positions are open. Design, applications, project engineering, manufacturing/production. BSEE or equal experience minimum.

***Applications Engineers:*** Responsible for providing customers with RF technical product support at the RF system and component level, participating with new standard and custom RFIC product development; developing application notes and data sheets. Requires BSEE/MSEE with minimum 3 years RF design/product experience, strong RF/Microwave measurement skills, design experience with analog and digital modulation schemes (AMPS, GSM, TDMA, CDMA); strong written and customer relation skills.

***Product Marketing Engineer:*** Responsible for new product development, coordinating the contributions of many departments including Design Engineering, Manufacturing, Marketing and Quality Assurance. Will prepare marketing plans that include new product objectives, competitive analyses, main user benefits, customer profiles and primary selling points. Requires BS degree in Engineering-related discipline and related experience, technical sales and marketing experience in RF/Wireless industry preferred.

***Key Account Manager:*** This position will work closely with key customers to implement standard product design-ins and custom IC development projects. Individual will manage all phases of project development: schedules, forecasts, resources and technical support. Requires engineering degree and experience with project management methods and tools. Account management of sales management experience is also a plus.

***Filter Design Engineer:*** MS. Minimum 3 years experience in the design and development of Broad Band, comb-line, strip-line, interdigital, low pass and high pass filters, multiplexers, diode switches (phase shifters) attenuators and microwave subsystems designs.

***Sr. MMIC Design:*** Design highly integrated GaAs MMICs for advanced cellular products. Circuits to be designed include: power amplifiers, driver amplifiers, LNAs, mixers, IF amplifiers, buffer amplifiers. RF frequencies are 900 and 1800 MHz. Circuitry will be designed for advance MMIC wafer process technologies.

***Regional Field Sales:*** Aggressive individuals to create and serve new accounts. Positions are located throughout the U.S.A. An engineer who wants to enter sales world is acceptable. Base salary, commission and car.

***Advanced Technology Development:*** Design and optimization of RFICs for high performance low-power wireless communications applications in a 60 GHz SiGe BiCMOS technology. Includes transceivers for cellular and PCS handsets and wireless communications devices at 900 MHz – 5.8 GHz. Ph.D./MS

With experience with one of the following: LNAs, VCOs, power amps, mixers and frequency synthesizers.

***Manager of Active Components:*** Lead the effort to develop the active component design competency and development strategy. BSEE with experience in designing discreet RF active components and managing design engineers required. Candidate must have experience in defining and recruiting associated disciplines required to successfully produce RF active components in high volume.

***Active Components Engineer:*** Design discreet RF active components for RF systems. BSEE with at least 2 years experience in designing LNAs required. Experience with high power amplifier design is a plus.

***Packaging Engineer:*** At least 3 years of relevant packaging experience. Experience with plastic packages or modules. Experience with PA specific problems an obvious plus. Job responsibilities to include: team with IC designers to develop optimal packaging solution for specific requirements, manage package qualification of any non-qualified package and manage/review any packaging related failure analyses specific to the product line.




***Design Engineer:*** Designs and develops passive RF and microwave components and systems including filters, couplers and related components, for release into manufacturing. A BSEE and minimum 2 years experience in RF/microwave circuit design and development required.

***Senior Electrical Engineer:*** Uses design synthesis and modeling tools to perform feasibility analysis and develop initial RF filter design. BSEE required. MSEE preferred; must have 5 years RF electronics and wireless communications experience with a minimum of 2 years RF filter design. Touchstone and HFSS preferred.

***RF Test Engineer:*** This position will support design engineering teams by designing and building automatic RF test systems for new and existing high volume production lines.

The individual in this position will also verify test system performance and develop documentation packages and troubleshooting guides for test system support and maintenance. Must also be able to design complex hardware interfaces to RF test equipment. Experience with CDMA, GSM and TDMA modulation formats a plus as is experience with VB and/or C++ programming and experience with device handles (pick and place or gravity fed). A BSEE or equivalent.


VISIT OUR WEBSITE AT WWW.MICSEARCH.COM

MICRO COMMUNICATIONS EXECUTIVE SEARCH

*We specialize in the placement of wireless, RF, microwave communications professionals both nationally and internationally*

800 Turnpike St. • North Andover, MA 01845
Call Collect: Tel: (978) 685-2272 • Fax: (978) 794-JOBS


# NEW PRODUCTS

not raw or painted aluminum, ensuring that the unit will not corrode or otherwise change its electrical characteristics over time. The wideband technology used in the unit allows the convenience of a single antenna for tests that previously would have required two or more antennas.
***Electro-Metrics, Johnstown, NY (518) 762-2600.***

***Circle No. 282***

## GPS Antennas

The GPS series antennas feature a low profile microstrip patch design and provide higher gain and versatility than previous GPS antennas supplied by the company. Two basic model are available according to the user's mounting requirements and can be ordered in 26 or 31 dBi versions. The models AGPS26 and AGPS31 antennas are available with magnetic, screw or adhesive tape mount options and feature a built-in ground plane. The M mount-compatible units provide 360° azimuth and 0° to 90° elevation coverage with right-hand circular polarization. A low profile housing and electrically shielded LNA PCB with burnout protection is provided. In addition, the antennas are supplied with 15 feet of RG174/U cable and various connector choices.



***MAXRAD Inc., Hanover Park, IL (800) 323-9122.***

***Circle No. 283***

## High Power Trihedral Corner Reflector

The model 9887-800 high power trihedral corner reflector consists of a high power radome-enclosed monopole element placed into a trihedral


DIRECTOR, SALES AND MARKETING

We are seeking a Sales and Marketing professional with experience in the passive electronic components field to join our Senior Management team. As a member of our team, the Director of Sales and Marketing will be responsible for sales and marketing of our existing thick and thin film high reliability resistive products. In addition, the Director will work closely with Engineering and R&D to develop and market new products.

This position will report directly to the President/CEO. Responsibilities will include the management of routine operations for the Sales and Marketing departments, contract negotiation and review, market research, selection of Manufacturers Representatives, and control of the distribution channel. The position will required extensive domestic and foreign travel.

Candidates should have a minimum of 10 years experience in Sales and Marketing of passive electronic components, a BS in business or engineering, strong communication skills, and a technical background. Experience in the military, medical or microwave markets is a plus.

State of the Art, Inc. is a small business with a casual work atmosphere. We offer excellent benefits, competitive salaries and opportunities for personal growth. For further information concerning State of the Art, visit our Website at resistor.com.

Résumés can be mailed to:

**Director, Sales and Marketing**
**State of the Art, Inc.**
**2470 Fox Hill Road**
**State College, PA 16803**
**or faxed to**
**814-355-2714**
*EOE*



corner reflector. The unit operates over the frequency range from 150 to 300 MHz and power handling is 325 kW at a 0.01 duty factor. Polarization is linear (rotatable for horizontal or vertical). Gain is 8 dBi (min); SWR is 2 (max); sidelobes are 13 dB (min), E and H planes; and cross polarization is 10 dB (min). The RF port os 3-1/8" 50 Ω coaxial line.

***Seavey Engineering Associates Inc., Pembroke, MA (781) 829-4740.***

**Circle No. 284**

# INTEGRATED CIRCUITS

## ■ Integrated Data Tuner Solution

This low power, high performance integrated data tuner solution consists of an integrated upconverter with a surface-acoustic wave filter and an integrated downconverter with a dual-synthesizer. The tuner conserves printed circuit board real estate while enabling high speed data, video and voice-over-cable and features the lowest power consumption for cable set-top, cable modem and cable telephony applications. Designed specifically to support the latest 256 quadrature amplitude modulation digital formats, the tuner solution reduces component count, minimizes power consumption and offers DOCSIS-compliant performance essential for next-generation cable devices. Price: $7.50 (10,000).

***ANADIGICS Inc., Warren, NJ (908) 668-5000.***

**Circle No. 246**

## ■ LNA/Mixer 900 MHz Downconverter

The model RF2461 low noise amplifier (LNA)/mixer 900 MHz downconverter is a complete receiver front-end that provides good noise figure and linearity performance for dual-mode CDMA/FM cellular applications. In addition to its digitally controlled LNA gain, mixer gain and power-down mode, the RF2461 also features adjustable IIP3 of the LNA and mixer bias current using an off-chip current-setting resistor. The unit can be digitally controlled between two levels, reducing current draw in CDMA standby and other situations that do not require high IIP3 while offering a 30 dB stepped gain control range as it amplifies and downconverts RF signals. Typical noise figure is 1.8 dB (RF2461), 1.8 dB (LNA) and 5.7 (mixer). Designed specifically for CDMA/FM cellular systems and general-purpose downconversion for various battery-powered equipment applications, the unit is housed in an LPCC-20 package that measures 4 mm × 4 mm. Price: $1.87 (in quantities exceeding 10,000).

***RF Micro Devices Inc. (RFMD), Greensboro, NC (336) 664-1233.***

**Circle No. 247**

## ■ Single-chip, Zero-IF, ISM-band Transceiver

The model NT2903 Chip-Ceiver™ is reportedly the world's first fully integrated, single-chip, FM/FSK transceiver utilizing a unique, direct-conversion, zero-IF architecture. This approach allows a 30 to 40 percent reduction in total component count compared to a super-heterodyne receiver. The Chip-Ceiver offers full duplex operation in any 26 MHz band from 400 to 1000 MHz on a 2.7 to 3.3 V supply and integrates on-chip, dial VCOs, dual phase-locked loops, a reference oscillator, a quadrature mixer, baseband filters, AGC and a patented tankless discriminator. In addition, the device utilizes a direct modulation scheme, which can accept either analog or digital signals. Tuning is accomplished via a three-wire serial interface. Power output is 1.5 dBm. The device is fabricated as a monolithic BiCMOS IC and is available in a TQFP-48 (7 mm) package. Price: $4.63 (10,000). A fully functional evaluation board is also available for $199.

***NUMA Technologies Inc., Naples, FL (941) 591-5008.***

**Circle No. 285**

# SOURCES

## ■ Dielectric Resonator Sources

The company's dielectric resonator sources are designed with the lowest phase noise at the

*[Continued on page 191]*


SHP

**SPECIAL HERMETIC PRODUCTS, INC.**

*Hi-Rel By Design*



FEEDTHRUS, RF, DC, CAPACITIVE



MICROMINIATURE CONNECTORS

***Provides*** 50 combined years of qualified Engineering Experience in glass to metal seal design, manufacturing and **Application**.

***Developed*** the "Aluminum Compatible" seal, which enjoys unprecedented reliability.

***Provides*** full review of your product to assure the optimum selection of feedthru design.

***Assures*** dependable delivery through a complete line of standard products that will be readily available when you need them.

***Supports*** your needs with ancillary items, such as: Solder Preforms, Fixtures, Dielectric Bushings and Capacitive Devices.



HEADERS, DC, CAPACITIVE, HYBRID



ANCILLARY PRODUCTS

Riverview Mill • P.O. Box 269 • Wilton, NH 03086
TEL: (603) 654-2002 • Fax: (603) 654-2533
url: www.shp-seals.com • e-mail: sales@shp-seals.com

# "We already make ~~1,786~~ 2107 standard connectors and cable assemblies...

**SMA Connectors:** cable types, microstripline, bulkhead, panel mount, field replaceables, hermetic, stripline and radius right angles.



**SMP and new SSMP Connectors:** subminiature and sub subminiature push-on connectors for up to 40 GHz and beyond.



**Type "N" Connectors:** cable types, bulkhead, panel mount and field replaceables.



**TNC Connectors:** cable types, bulkhead, panel mount, field replaceables and radius right angles.



**2.92mm "K" Connectors and Adapters:** cable types, field replaceables, radius right angles and in-series adapters.



**Adapters:** in and between series; SMA, TNC, Type "N", 7mm, 3.5mm, 2.4mm and "K"[SM]



**Special Connectors:** build to print, design to cost, high temperature, high power, special hermetics and special radius right angles.



**Cable Assemblies:** custom semi-rigid and flexible plus Handi-Form[SM] reformable cable assemblies.



"K" is a registered trademark of the Wiltron Company

## ...but if you need something special, let's talk."



**Walt Carpenter**
**CDI Sales Manager**

**Connecting Devices, Inc.**

(562) 498-0901 • FAX: (562) 494-0955 • E-mail: sales@connectingdevices.com • Homepage: http://www.connectingdevices.com

CIRCLE 142 ON READER SERVICE CARD

# NEW PRODUCTS



lowest cost. Internal reference models are available up to ±5 ppm stability. (Phase-locked sources over 27 GHz also are available.) Special options include two outputs and a separate reference module to minimize size. The company also offers special units and surface-mount synthesizers as well as voltage-controlled oscillators.

***RADITEK, San Jose, CA (408) 266-7404.***

***Circle No. 249***

## Crystal-controlled Oscillators



The XO2000 series crystal-controlled oscillators cover the output frequency range from 80 to 120 MHz with frequency stability of ±5 ppm. RF output power is 13 dBm (typ) with a power supply of +12 V DC at 35 mA. Phase noise at 10 Hz is –85 dBc/Hz and at 100 Hz is –122 dBc/Hz. Supply ripple sensitivity is 50 mV, –76 dBc at 400 MHz and vibration sensitivity is < $5 \times 10^{9}$/G. Operating temperature range is 0° to +50°C. Size: 1.00" × 1.00" × 0.50".

***Technology Cyclonetics Inc. (TCI), Cumberland, PA (717) 774-2746.***

***Circle No. 250***

## OCXOs



The OX-2000 series oven-controlled crystal oscillators (OCXO) are available in frequencies from 1 to 160 MHz with a center frequency of ±0.1 ppm (from 0° to 50°C). The oscillators meet ANSI Stratum-3 requirements, including ±4.6 ppm total stability over a lifetime and ±0.37 ppm over a holdover period as well as variations in temperature, supply voltage, load variations and 24 hours of aging. The oscillators utilize a contemporary semiconductor heating design, ensuring that the units reach thermal stability and specifications within 1.5 minutes (typ) and three minutes (max). The OCXOs consume less than 2.5 W during warm-up and less than 1 W steady-state at 25°C. The OX-2000 series are available in small 14-pin DIPs with package height of less than 10 mm from 1 to 60 MHz and less than 12.7 mm for frequencies up to 160 MHz, which include SONET and asynchronous transfer mode applications. Prices: start at $50 (10,000). Delivery: 12 weeks (ARO).

***Raltron Electronics Corp., Miami, FL (305) 593-6033.***

***Circle No. 264***

# PROCESSING EQUIPMENT

## Laser Stencil



The LPKF StencilLaser/Polymer enables the production of polymer SMD stencils while drastically reducing print rejects due to better paste release, especially in fine pitch technology. The SMD stencils offer superior board con-


MICROWAVE INSTRUMENTATION TECHNOLOGIES, LLC

Performance Counts.

**When it comes to testing your antenna products and systems,** *Microwave Instrumentation Technologies is the performance leader. More than forty-five years ago we helped define the concept of antenna measurement with the introduction of the first microwave antenna pattern recorder.*

*Over the years, as a division of Scientific-Atlanta, Inc., we became the leading global supplier of microwave measurement products and systems. We introduced the first commercial planar scanner, the first compact range, the first automatic measurement system and the first spherical near-field measurement system.*

*Today, we're an independent company – Microwave Instrumentation Technologies, LLC – and our performance as a global supplier of microwave measurement products and systems is still unsurpassed. We're continuing our leadership tradition with world-class products that offer unmatched accuracy, flexibility and speed for component, near field, far field, and compact range measurement applications.*

*And our customer service – whether for small repairs, turnkey installations, calibrations or range relocations – is second to none.*



***For more information on MI Technologies, call us at 1-800-848-7921, or visit our web site at www.mi-technologies.com***
*Phone: 678-475-8328*
*Fax: 678-475-8391*
*4500 River Green Parkway, Suite 200*
*Duluth, Georgia 30096-2580*

**For the best measurement performance you need the best performer.**

MI Technologies

# NEW PRODUCTS

tact during printing process as well as print speeds up to three times faster than metal stencils. The stencils also offer a longer lifespan and better memory effect of polymer stencils than metal stencils. In combination with the company's TurboCut, the StencilLaser is well suited

# SUBSYSTEMS

## High Power Pulse Modulator

The PowerMod™ HVPM solid-state, high power pulse modulator features fast rise and fall times of 5 µs for use in ion implantation, high energy physics, semiconductor



A) at up to 30 kHz and insertion loss of less than 0.2 dB. Nominal pulse width is 1 to 100 µs and nominal pulse frequency is 0 to 30 kHz. Offering full internal self-protection against over-voltage and over-current conditions, the PowerMod is well suited for upgrading switch tubes or thyratron/PFN systems. The 19-inch rack-mountable unit is fully air-cooled and insulated and measures 19.0" × 30.0" × 24.0". Price: $50,000.

***Diversified Technologies Inc., Bedford, MA (781) 275-9444***


**Technical Services Engineer**

Responsibilities will include providing on-site customer technical support, consulting on PCB fabrication inquiries, coordinating analytical services and assisting with sales and marketing efforts. To qualify, we require a Bachelor's degree in Science or Business (or the equivalent) and 3+ years of PCB facility experience in a technical service capacity. Familiarity with PCB processing is essential. Expertise investigating fabrication issues is also expected. Experience in Microwave or Wireless industry a definite plus. 50% or more travel required.

As a world leader, we can offer you an attractive compensation, benefits and relocation package as well as considerable

0.300 ins loss

100 MHz-19.5 GHz COAX/DROP-IN ISOLATOR / CIRCULATOR

Aerocomm Thailand

89 Intamara 41, Sutthisaran Rd. Dindang

# SYSTEMS

## Programmable Digital Downconverter




The CommLink™ HSP50216 programmable digital downconverter (PDC) for cellular base stations delivers multiple channel processing of high dynamic range cellular protocols. The PDC contains four channels that can support up to four different protocols simultaneously, including IS-136 TDMA, GSM, EDGE, IS-95 CDMA, 3G and legacy protocols such as AMPS, enabling cellular operators to efficiently support multiple transmission protocols within the confines of one base station. The unit features on-board digital automatic gain circuitry, which, when used in conjunction with on-board digital filtering, provides gain to a low level signal while simultaneously attenuating out-of-band interfering signals. A small outline BGA package that reduces required board space is included. Price: $60 (1000).
***Intersil Corp.,***
***Melbourne, FL (888) 468-3774, ext. 7976.***

**Circle No. 262**

## Spread Spectrum Data Transceiver

The model SS9600 spread spectrum data transceiver for use in point-to-point and point-to-multipoint systems features a built-in modem. Operating in the 2.4 GHz band and capable of 9600 bps over the air rate, the transceiver is a true frequency-hopper and can configure large systems with as many as 238 units. The transceiver is a true plug-and-play radio modem with built-in self-adjusting power control to ensure good communications.



***RF Neulink, a division of RF Industries, San Diego, CA (800) 233-1728 or (858) 549-6340.***

**Circle No. 253**

## 2 W Ku-band Transceiver

This 2 W transceiver comprises a solid-state power amplifier, a low noise amplifier, Ku-band to L-band converters and an orthogonal-mode transducer with waveguide filters. (An external reference oscillator is available.) Nominal input power is ±1 dB in the transmit section. The self-contained unit also features a micro controller and fault monitoring. Operating temperature range is –20° to +55°C.
***TSAT, +47 23 037360, fax +47 23 037361 or e-mail: info@tsat.com.***

**Circle No. 286**

# TEST EQUIPMENT

## Multiport Test System

The Agilent 87050E multiport test sets can dramatically improve throughput and accuracy when evaluating the performance of 50 Ω RF components on high volume production lines. The multiport test sets are designed to work with the Agilent 8712E series network analyzers to offer a complete solution up to 3 GHz for measuring devices with up to 12 ports. The Agilent 87050E allows all transmission paths and port reflection characteristics of a multiport device to be completely characterized with a single set of connections to a device's ports, substantially reducing typical test times by eliminating the need to constantly connect and re-connect components. An integrated local area network interface allows the measurement system to become part of a factory-wide Ethernet network using standard protocols. Prices: $8250 to $14,250 (87050E) and $9750 to $22,250 (8712E). Delivery: eight weeks (ARO).



***Agilent Technologies, Palo Alto, CA (800) 452-4844, ext. 6849.***

**Circle No. 254**

[Continued on page 199]






Want to know the secret of success in the land of Linux and Nokia? It's APLAC. An industrial-strength simulation technology that combines the functionality of Spice with the utility of an advanced RF simulator. APLAC, and only APLAC, provides the accurate IC- and board-level models and precise methods to analyze non-linear circuit behavior demanded by top RF and analog designers. The only approach up to the complex design challenges ahead: 3G, Bluetooth, and beyond.

APLAC gives you something unique - the freedom to do things right. All you do is supply the three ingredients mentioned above.

To learn more about APLAC, why not download a student version from our website www.aplac.com and contact us at APLAC Solutions.

APLAC

**APLAC Solutions Inc**
320 Decker Dr, Suite 100, Irving, TX 75062
tel. 972-719-2562
www.aplac.com e-mail: sales@aplac.com

**APLAC Solutions Corporation**
Tulkinkuja 3, FIN-02600 ESPOO, Finland
tel. +358-9-540 450 00
www.aplac.com e-mail: sales@aplac.com

**The Freedom To Do Things Right.**

CIRCLE 21 ON READER SERVICE CARD

# NEW PRODUCTS

## Manual Harmonic Tuner



The model MMT-4006-2H manual microwave tuner covers the 0.4 to 50 GHz frequency range in several medium and large bandwidth model types. Best suited for use in critical RF impedance matching operations, such as load-pull and noise measurements, the manual microwave tuner provides independent tuning of the harmonic impedance at 2 $f_o$. The tuner also allows for fundamental tuning at frequencies between 6 and 40 GHz and second harmonic tuning at any user-defined frequency between 12 and 44 GHz.

***Focus Microwaves Inc.,***
***St-Laurent, Quebec, Canada***
***(514) 335-6227.***

**Circle No. 256**

## Distortion Measurement Test Set



The model CS29010 fully integrated distortion measurement test set offers high performance arbitrary waveform generation, radio frequency up- and down-conversion and wideband recording capability with the deep memory via a 600 MHz Pentium II process with a Windows NT™ operating system. Designed specifically for test and measurement requirements of cellular, PCS, satellite, LMDS, wireless data and data link systems operating in complex multichannel and multisignal environments, the test set can determine key performance characteristics such as noise power ratio, third-order intermodulation distortion and adjacent-channel power ratio. The test set, which includes the company's unique and easy-to-use LabVIEW™ configured measurement and control software that provides initiation and scroll of test routines, is well suited for a variety of wideband, complex mixed-signal design and development for components, subsystems and systems.

***Celerity Systems,***
***a division of L-3 Communications,***
***Thousand Oaks, CA***
***(805) 523-7464.***

**Circle No. 255**

## Microwave Analyzer



The 6800 series microwave system analyzers now have expanded capabilities that include the addition of a high output power source option. The option provides a minimum +10 dBm of leveled power up to 24 GHz, allowing for local oscillator substitution in mixer and converter measurements. The increased output power also increases the dynamic range in scalar and tuned input modes by 5 dB, yielding up to 90 dB for filter and passive component testing. Other features of the 6800 series include frequency versions of 3, 8.4, 20 and 24 GHz, precision scalar network measurements, real-time transmission line fault location with 0.1 percent accuracy and modular design for rapid service. Price: $1620 to $4050, depending on series model. Delivery: four weeks (ARO).

***IFR Systems Inc.,***
***Wichita, KS (800) 835-2352***
***or (316) 522-4981.***

**Circle No. 257**

*[Continued on page 201]*


| | | |
|---|---|---|
| VA 936 R 12 / VKC 7936R12 | C Band | TH 2490 B |
| VA 936 R 24 / VKC 7936R24 | | TH 2450 CA |
| VA 936 L12 / VKC 7936L12 | | TH 2417 B |
| VA 936 L 24 / VKC 7936L24 | | TH 2417 CA |
| VTC 6361 B4 | | TH 3849 |
| VKC 7890 B | | TH 2454 B |
| VKU 7791 J 8 | Ku Band | TH 2426 D |
| VKU 7820 A 8 | | TH 2486 D |
| VKU 2455 B 12 | | TH 2488 B |
| VKU 2455 E 8 | | TH 2488 D |
| VTU 6392 B 2 | | TH 3759 A |
| VTU 6392 B 2 P | | TH 3759 R |
| VTU 6393 B 1 | | TH 3759 S |
| VKU 7791 Z 6 | DBS | TH 2485 A |
| VKU 7791 Z 12 | | TH 2485 B |

Announcing freedom of choice. Now you can refurbish or update your earth station by choosing a competitive tube. And we do mean competitive. Tubes from Thomson Components and Tubes are compatible with commercial standards. And they incorporate a whole

The table shows equivalents.

Some tubes are more equal than others. We give you a choice.

spectrum of key advantages. Including the latest technological advances in the field. All of which makes them the most cost-effective solution you can get. Which means now you've got a real choice. Make the most of it. For more information, e-mail us at: info@tctus.com

www.tctus.com

THOMSON COMPONENTS AND TUBES Corp.

You need it, we'll supply it

# HIGH POWER
## Microwave Amplifiers

GHz
10GHz
8
6
4
2
1GHz

Milmega's strength is the flexibility to design and build standard and custom products and systems for high quality solid state microwave amplifiers. This has created the Company's global reputation as being the experts in the field of high power microwave engineering.




**Milmega's capability to custom build for a comprehensive range of leading edge market applications include:**

**Physics research,** where amplifiers provide high levels of energy to pump electrons up into required energy orbits.

**For Electromagnetic Compatibility (EMC) testing,** where wide frequency ranges are essential, Milmega amplifiers can be found generating field strengths over 200V/m.

**For defence applications,** the ability to operate over wide temperature ranges with high reliability, allows Milmega amplifiers to be built into sophisticated jamming systems, operated from external pods suspended below aircraft wings.

**In hospitals,** microwave energy is used in many processes to eliminate unwanted tissue and many other specialised applications.

MILMEGA
A Thermo Voltek Company

Designers and Manufacturers
of High Power Microwave Amplifiers and Systems

**Milmega Ltd,** Ryde Business Park, Nicholson Road, Ryde, Isle of Wight, PO33 1BQ, UK
Tel: +44(0) 1983 616863 Fax: +44(0) 1983 616864
E-mail: sales@milmega.co.uk Web: www.milmega.co.uk

A division of Thermo Voltek, a Thermo Electron Company

**CIRCLE 81 ON READER SERVICE CARD**

Thermo Voltek CORPORATION · MILMEGA · KeyTek · PACIFIC · COMTEST · GLOBAL

# NEW PRODUCTS

## Interference Analyzer

The BaseStAR™ interference analyzer is designed to protect specific licensed uplink/reverse telecommunications channels (for example, 805 to 821 MHz, 824 to 849 MHz and 1850 to 1910 MHz) by simultaneously monitoring the protected band and potential interference sources located between 50 MHz and 2 GHz. The device can identify interference generated by a single emitter or the interaction of two independent emitters. The analyzer provides information about the source of emission, including the offending company's name and location, transmitter characteristics and the interference mechanism.



***Summitek Instruments, Englewood, CO (303) 768-8080.***

***Circle No. 287***

## Automated Noise Power Ratio Test Set

The model UFX-NPR-22 automated noise power ratio (NPR) test set is a single, self-contained unit that provides accurate NPR measurements and return path laser testing characterization, eliminating the need for a spectrum analyzer or other external hardware. At the push of a button or remote command via a general-purpose interface bus, the unit can perform up to 25 NPR measurements at different input levels, and store on-going measurement results in memory. Noise power output is –60 to 0 dBm and impedance is 50 or 75 Ω while operating over the 5 to 42 MHz frequency range. (The unit uses industry recommended test procedures for characterizing NPR over dynamic range.)

***Noise Com, Paramus, NJ (201) 261-8797.***

***Circle No. 258***

# DEVICE

## 4 W Plastic-packaged GaAs Power FET

The model AM144MX-TF plastic-packaged GaAs power FET has a total gate width of 14.4 mm and is designed for high power microwave applications up to 8 GHz. The plastic package is provided with straight leads in a drop-in mounting style. The bottom of the package serves simultaneously as DC ground, RF ground and thermal path. The unit features high gain and saturated power of 36.5 dBm at 2 GHz. Three heat sink paths are provided for effective heat removal.

***AMCOM Communications Inc., Clarksburg, MD (301) 353-8400.***

***Circle No. 281***

# TUBES

## EHF-band Traveling-wave Tubes



The models TH 3760 and TH 3971 traveling-wave tubes (TWT) are designed specifically for the military SATCOM market as well as emerging multimedia requirements in the 42.5 and 47.5 GHz band. The TH 3760 uses a helix delay line and conduction cooling while the TH 3971 utilizes a coupled cavity delay line and forced-air cooling. Designed for integration in ground transmitters handling satellite uplinks for military transmissions, the TH 3760 and TH 3971 generates 250 W of power, respectively, over the 43.5 to 45.5 GHz band.

***Thomson Tubes Electroniques, Meudon-La-Foret, France +33 (1) 30 70 36 43.***

***Circle No. 259***




microwave JOURNAL CALL FOR PAPERS

To see one's work in print is the rightful reward of every creative engineer and scientist. The editors of *Microwave Journal* invite you to submit your technical manuscripts for consideration to be published in one of our upcoming issues. Technical articles, application notes and tutorial articles based on the monthly editorial themes are encouraged. Editorial themes include wireless, radar and antennas; RF components and systems; test and measurement; amplifiers and oscillators; semiconductors and MMICs; commercial applications; IVHS and ITS; dual technologies; communications and PCN; passive components; and control devices, modulation and DSP.




Design features should contain new and innovative technical ideas of practical use and interest to our predominantly engineering readers. Papers should be 14 to 16 double-spaced pages and contain 8 to 12 visual aids in the form of sketches, graphs, photographs or tables.

Papers should be submitted to the attention of the Technical Editor and will be reviewed promptly by our Editorial Review Board prior to acceptance. Articles outside of the monthy themes also will be considered.

SEND ALL MATERIAL TO:
*Microwave Journal*
685 Canton Street
Norwood, MA 02062
(781) 769-9750
Fax (781) 769-5037



# NEW LITERATURE

## ■ Advanced Filter Solution Brochure

This four-page brochure contains information on the company's 300 to 3500 MHz ceramic or dielectric resonator filters, DC to 5 GHz LC filters and 500 MHz to 40 GHz cavity filters. An overview of the company's manufacturing capabilities and a facility description are included.
***Advanced Filter Solutions (AFS), Frederick, MD (301) 698-0114.***

**Circle No. 200**

## ■ Crystal Product Data Book 2000

This 284-page data book provides specifications for hundreds of standard and custom frequency control devices, including the CFPT-9100 Stratum III surface-mount TCXO and the CFPV-2365 low voltage VCXO. Customers can order components using the specifications and controlled issue numbers provided. A CD-ROM version also is available.
***C-MAC Frequency Products, Durham, NC (919) 941-0430.***

**Circle No. 201**

## ■ Frequency Distribution System Data Sheet

This two-page data sheet describes the company's frequency distribution system designed specifically for satellite ground station and shipboard, mobile and laboratory applications. Full technical specifications for primary and secondary models FE-798A and FE-799A are included.
***Frequency Electronics Inc., Mitchel Field, NY (516) 794-4500.***

**Circle No. 202**

## ■ Ultrawideband Personal Monitor Data Sheet

This data sheet introduces the company's 8846 and 8848 series Nardalert® RF personal monitors, which offer 300 kHz to 45 GHz of detection. Product descriptions, photographs and key specifications are provided.
***Narda Microwave-East, a division of L-3 Communications, Hauppauge, NY (631) 231-1700.***

**Circle No. 204**

## ■ High Power Microwave Amplifier Catalog

This 12-page catalog provides information on high power amplifiers that cover the 80 MHz to 10 GHz frequency ranges and an overview of the company's capabilities in communications testing, medical products, electronic warfare, EMC and high energy physics.
***Milmega Ltd., Ryde, Isle of Wight, UK +44 (0) 1983 616 863.***

**Circle No. 204**

## ■ DAQ Designer™ 2000 CD

This CD helps engineers and scientists interactively configure custom measurement systems by recommending real-time data acquisition and motion control hardware and software in addition to signal conditioning, computer-based instruments and instrument controllers, and image acquisition hardware and software.
***National Instruments, Austin, TX (800) 258-7022.***

**Circle No. 206**

## ■ Enclosure and Packaging Capability Brochure

This 20-page brochure highlights the company's range of standard, modified and custom enclosure solutions and packaging system capabilities for telecommunications, data communications, test and measurement, computer, broadband, military and aerospace applications. The company's Prototype to Production process also is described.
***Pentair Electronic Packaging, Plymouth, MN (888) 550-9543.***

**Circle No. 207**

## ■ Surface-mount Frequency Synthesizer Data Sheet

This four-page data sheet describes the company's surface-mount synthesizers, which consist of a miniature VCO integrated with a high performance PLL chip, resulting in a low phase noise programmable or fixed-frequency synthesizer for RF operation up to 2.5 GHz. Key specifications and outline drawings are included.
***Princeton Electronic Systems Inc. (PES), Princeton, NJ (609) 275-6500.***

**Circle No. 208**

## ■ 2000 Designer's Handbook

The 2000 Designer's Handbook features more than 150 products from the company's power amplifier, digital cellular, silicon system and broadband product lines. Technical information, performance test data, specifications, schematics and application notes also are provided.
***RF Micro Devices Inc. (RFMD), Greensboro, NC (336) 664-1233.***

**Circle No. 209**

## ■ RF and Microwave Solution Brochure

This four-page brochure describes the company's integrated microwave products, including oscillators, multipliers, comb generators, frequency synthesizers and microwave assemblies as well as ferrite isolators and frequency and timing systems. Product photographs are included. A company overview and a facility description also are provided.
***TRAK Microwave Corp., Tampa, FL (813) 901-7200.***

**Circle No. 211**

## ■ EMF Report

This 28-page report provides information on electromagnetic exposure and its potential negative effects as well as H-field measurements based on personal specialists' knowledge, organization background and national environment. Price: $20.
***Wandel & Goltermann GmbH & Co., Eningen, Germany +49 71 21 86 1616.***

**Circle No. 212**

## ■ Capability Brochure

This eight-page brochure describes the capabilities and product offerings of 10 specialized divisions of Vertex Communications Corp., a designer and manufacturer of satellite earth station subsystems. Photographs are included and a listing of sales offices is provided.
***Vertex Communications Corp., Kilgore, TX (903) 984-0555.***

**Circle No. 213**





## Feedback Control Systems

**Charles L. Phillips and Royce D. Harbor**
**Prentice Hall**
**658 pages; $100**
**ISBN: 0-13-949090-6**

This fourth edition has been updated to include the SIMULINK™ simulation program, a block diagram program used with MATLAB™ for the simulation of both continuous (analog) and discrete systems and nonlinear continuous systems. Most of the examples in the book now contain short MATLAB programs. The material has been organized into three principle areas: analog control systems, digital control systems and nonlinear analog control systems.

*"...practicing engineers will find this book very useful for reference and instruction."*

After a brief introduction, a short history of feedback control systems is presented and mathematical models of some common control system components are developed. The section on the analysis and design of linear analog systems (control systems with no sampling) begins by developing the transfer function and state-variable models of linear analog systems. Typical responses of linear analog systems, including the concept of frequency response, are presented. Important control system characteristics are developed and some applications of closed-loop systems derived from these characteristics are noted. The concept of system stability is presented along with the Routh-Hurwitz stability criterion. An analysis and design using root locus (time-response) procedures are presented next, and the equally important frequency response analysis and design procedures are described. Modern control system design is covered in the final chapter of this section. Pole-placement design is developed and the design of state estimators is introduced.

Digital control systems are covered in the next section. All of the previously presented techniques are developed again for digital systems. The final section deals with nonlinear system analysis. These methods include the describing-function analysis, linearization and state-plane analysis. Three appendices include reviews on matrices and Laplace transforms as well as a table of Laplace and z transforms.

Many examples are offered, primarily limited to illustrating one concept at a time for the benefit of the beginning students who use this text in course work. A solutions manual is available for teachers for classroom work using this text. Although written as a classroom textbook, practicing engineers will find this book very useful for reference and instruction.

**To order this book, contact: Prentice Hall, PO Box 11073, Des Moines, IA 50336 (800) 947-7700.**

## Wireless Technician's Handbook

**Andrew Miceli**
**Artech House Inc.**
**256 pages; $59, £41**
**ISBN: 1-58053-005-2**

A text aimed at technicians is somewhat unique. However, a book with information more detailed than needed for business professionals, but less complex than engineering texts without the baffling formulas and graphs can be quite refreshing. The primary purpose of this book is to train technicians in wireless system fundamentals. However, it is also a great reference text for those engineers who are not directly in the field and desire a cursory look at the subject.

As expected, the book begins with an introductory chapter on basic RF and digital principles, including RF propagation and modulation formats. Cellular radio concepts are covered next, with a review of the history of cellular radio communications and a discussion of cellular networks and multiple access techniques. The technical aspects of the AMPS system are also presented along with an explanation of the many terms and abbreviations associated with the service and its formats and standards. In addition, North American-TDMA (NA-TDMA) and CDMA-ONE dual-mode standards are explained. Separate chapters cover the details of NA-TDMA (strong in the Americas), GSM (primarily in Europe) and CDMA system architecture and operation.

*"...this book is useful for anyone seeking a simple understanding of today's wireless cellular and PCS communications systems."*

The basics of field testing are introduced next. This section is designed to give a technician and technical manager a basic understanding of many of the tools available as well as an overview of the primary tests that are performed in the field for each of the discussed technologies. The building blocks of a common cellular transceiver are presented and typical system measurements are discussed. The final three chapters are devoted to testing procedures for AMPS, TDMA and CDMA systems.

Much of the information in this book is useful for anyone seeking a simple understanding of today's wireless cellular and PCS communications systems. Technicians will find the sections on testing of particular interest.

**To order this book, contact: Artech House Inc., 685 Canton St., Norwood, MA 02062 (781) 0769-9750, ext. 4002; or 46 Gillingham St., London SW1V 1HH, UK +44 (0) 20 7596 8750.**

*Frank Bashore*

*Frank Bashore is a member of the* Microwave Journal *staff.*

# ADVERTISING INDEX

| Circle No. | Advertiser | Page No. | Phone | Fax | Web/E-Mail Address |
|---|---|---|---|---|---|
| 1 | Advanced Control Components Inc. | 148 | 732-460-0212 | 732-460-0214 | www.advanced-control.com |
| 24 | Advantest Corporation | 112 | +81-3-3342-7500 | | www.advantest.co.jp/index-e.html |
| 2 | Aerocomm Satellite Technology | 192 | +662-693-8300 | +662-693-8304 | www.aerocommthailand.com |
| 3,4,5,6 | Agilent Technologies | COV 2, 77 | 800-452-4844 | 415-857-5518 | www.agilent.com |
| 7 | Alpha Industries | 14 | 781-935-5150 | 617-824-4579 | www.alphaind.com |
| 8 | Amcom Communications Inc. | 52 | 301-353-8400 | 301-353-8401 | www.amcomusa.com |
| 13 | American Technical Ceramics | 50-51 | 516-622-4700 | 516-622-4748 | www.atceramics.com |
| 14 | AML Communications | 143 | 805-388-1345 | 805-484-2191 | www.amlj.com |
| 15 | Amplifier Research | 79 | 215-723-8181 | 215-723-5688 | www.ar-amps.com |
| 16 | Anaren Microwave | 54 | 800-544-2414 | 315-432-9121 | www.anaren.com |
| 17 | Anritsu Company | 105 | 800-ANRITSU | 972-671-1877 | www.us.anritsu.com |
| 18,19,20 | Ansoft Corporation | 21,65,127 | 412-261-3200 | 412-471-9427 | www.ansoft.com |
| 9 | Antenna Research Associates | 185 | 301-937-8888 | 301-937-2796 | www.ara-inc.com |
| 21 | Aplac | 194 | 972-719-2562 | | www.aplac.com |
| 22 | ARC Technologies Inc. | 75 | 978-388-2993 | 978-388-6866 | www.arc-tech.com |
| 23 | Artech House | 122 | 800-225-9977 | 781-769-6334 | www.artechhouse.com |
| 27 | Atlantic Microwave | 72-1* | +44-1376-550220 | +44-1376-552145 | e-mail: atlanticmicrowave.co.uk |
| 28 | ATN Microwave Inc. | 15 | 978-667-4200 | 978-667-8548 | www.atnmicrowave.com |
| 33,34 | Cascade Microtech | COV 4 | 503-601-1000 | 503-601-1002 | www.cascademicrotech.com |
| 29 | Coilcraft | 53 | 800-322-2645 | 847-639-1469 | www.coilcraft.com |
| 142 | Connecting Devices Inc. (CDI) | 190 | 562-498-0901 | 562-494-0955 | www.connectingdevices.com |
| 30 | Cougar Components | 166 | 408-522-3838 | 408-522-3839 | www.cougarcorp.com |
| 31 | CPI Canada | 161 | 905-877-0161 | 905-873-7416 | www.cpii.com/cmp |
| 32 | CST of America | 133 | 617-576-5857 | 617-576-5702 | www.cstamerica.com |
| 35 | CTT Inc. | 120 | 408-988-8521 | 408-986-9097 | www.cttinc.com |
| 10 | DB Products Inc. | 187 | 626-449-3790 | 626-449-7169 | www.dlbprod.com |
| 119 | Dept26.com | 108-109 | | | |
| 37 | Dielectric Laboratories | 62 | 315-655-8710 | 315-655-8179 | www.dilabs.com |
| 38 | Dow-Key Microwave Corp. | 135 | 805-650-0260 | 805-650-1734 | www.dowkey.com |
| 39 | Dupont | 107 | 800-284-3382 | 919-248-5770 | www.dupont.com/mcm/ |
| 40 | Dynawave | 121 | 978-469-0555 | 978-521-4589 | www.dynawave.com |
| 41 | Eagleware Corporation | 38-39,162 | 770-939-0136 | 770-939-0137 | www.eagleware.com |
| 42 | EMC Technology | 163 | 856-429-7800 | 856-429-6814 | www.emct.com |
| 43 | EMF Systems Inc. | 176 | 814-237-5738 | 814-237-7876 | www.emfsystems.com |
| 44 | Ericsson RF Power Products | 34-35,35ab | 1-877-GOLDMOS | | www.ericsson.com/rfpower |
| 45 | Filtel Microwave | 186 | 450-455-6082 | 450-424-5819 | |
| 46 | Florida RF Labs | 87 | 800-544-5594 | 888-544-5594 | www.rflabs.com |
| 47 | Focus Microwaves Inc. | 175 | 514-335-6227 | 514-335-6287 | www.focus-microwaves.com |
| 48 | General Microwave Corporation | 90 | 631-630-2000 | 631-630-2066 | www.generalmicrowave.com |
| 49 | GGB Industries Inc. | 3 | 941-643-4400 | 941-643-4403 | www.picoprobe.com |
| 50 | H.D. Communications | 150 | 631-588-3877 | 631-588-3879 | www.hdcom.com/rfeaps.html |
| 51 | Haverhill Cable | 94 | 978-372-6386 | 978-373-8024 | www.haverhillcable.com |
| 52,53 | Herley MDI | 68,97 | 781-729-9450 | 781-729-9547 | www.herleympg.com |
| 54 | Hittite Microwave | 61 | 978-250-3343 | 978-250-3373 | www.hittite.com |
| 55 | Huber + Suhner AG | 99 | +41-71-353-41-11 | +41-71-353-44-44 | www.hubersuhner.com |
| | IEEE MTT-S 2000 | 117 | | | www.ims2000.org |
| | Infineon Technologies | 111 | | | www.infineon.com/SiGe |
| 57 | Inmet Corporation | 104 | 888-244-6638 | 734-426-5557 | www.inmetcorp.com |
| 58 | JCA Technology | 27 | 805-445-9888 | 805-987-6990 | www.jcatech.com |
| 59 | JFW Industries Inc. | 8 | 317-887-1340 | 317-881-6790 | www.jfwindustries.com |
| 61 | JSM Electronics Inc. | 138 | 888-FONEJSM | 407-831-0087 | |
| 62 | K&L Microwave Inc. | 6 | 410-749-2424 | 410-749-2788 | www.klmicrowave.com |
| 63,64,65 | KMW | 29,63,89 | 562-926-2033 | 562-926-6133 | www.kmwinc.com |
| 66 | Labtech Ltd. | 186 | +44-1544-260033 | +44-1544-260033 | www.labtechcircuits.com |
| 67 | M/A-Com | 135 | 800-366-2266 | 800-618-8883 | www.macom.com |
| 68 | Maury Microwave Corporation | 9 | 909-987-4715 | 909-987-1112 | www.maurymw.com |
| 69,70 | Merrimac Industries | 42-43,45 | 973-575-1300 | 973-575-0531 | www.merrimacind.com |
| | Micro Comm | 188 | 978-685-2272 | 978-794-5627 | www.micsearch.com |
| 71 | Micronetics/Test Equipment | 33 | 603-883-2900 | 603-882-8987 | www.micronetics.com |
| 72 | Microwave Circuits | 186 | 202-829-3030 | 202-829-2639 | www.mcckts.com |
| 73 | Microwave Comm. Laboratories Inc. (MCLI) | 20 | 800-333-6254 | 727-381-6166 | www.mcli.com |
| 74 | Microwave Communications & Components | 126 | +82-2-3424-0800 | +82-2-3424-0808 | www.mcck.com |
| 75 | Microwave dB | 129 | 805-499-0410 | 805-498-0054 | www.microwavedb.com |

| Circle No. | Advertiser | Page No. | Phone | Fax | Web/E-Mail Address |
|---|---|---|---|---|---|
| 76,144 | Microwave Development Company Inc. | 17,177 | 603-870-6280 | 603-870-6210 | www.mdc-inc.net |
| 25,77 | Microwave Filter Company | 56,186 | 800-448-1666 | 315-463-1467 | www.microwavefilter.com |
| 12 | Microwave Instrumentation Technologies | 191 | 678-475-5328 | 678-475-5391 | www.mi-technologies.com |
| | *Microwave Journal* | 72,82,168,202 | 800-225-9977 | 781-769-5037 | www.mwjournal.com |
| 78 | Microwave Power Devices | 95 | 516-231-1400 | 516-434-1725 | www.mpd.com |
| 79 | Microwave Solutions Inc. | 152 | 800-967-4267 | 619-474-7003 | www.microwavesolutions.com |
| 80 | Microwave Specialty Corporation | 158 | 760-744-1544 | 760-744-1565 | www.microwavespecialty.com |
| 81 | Milmega | 200 | +44-0-1983-616863 | +44-0-1983-616864 | www.milmega.co.uk |
| 82,83, 84,85, 86,87, 88,89, 90,91, 92,93, 94,95, 96,97, 98,99, 100,101, 102,103, 104,105, 106,107, 108,109, | Mini Circuits Laboratory | 4–5, 7, 11, 25, 40, 48, 71, 101, 119, 141, 157, 165, 171, 183 | 718-934-4500 | 718-332-4661 | www.minicircuits.com |
| 110,111, 112,113 | MITEQ Inc. | 18–19,67, 153,169 | 631-436-7400 | 631-436-7431 | www.miteq.com |
| 114 | Modco | 146 | 775-331-2442 | 775-331-6266 | www.modcoinc.com |
| 115 | Modular Components National Inc. | 102 | 410-879-6533 | 410-838-7629 | www.mcn-mmpc.com |
| 116,117 | MTI-Milliren Technologies Inc. | 85,134 | 978-465-6064 | 978-465-6637 | www.mti-milliren.com |
| 118 | Narda Microwave-East, an L3 Communications Co. | 73 | 516-351-4500 | 516-231-1711 | www.nardamicrowave.com |
| 120 | Nexyn | 116 | 408-732-0783 | 408-730-0378 | www.nexyn.com |
| | Noisecom | 99ab | 201-261-8797 | 201-261-8339 | www.noisecom.com |
| 121 | Oscilloquartz SA | 179 | +41-32-722-5555 | +41-32-722-5556 | www.oscilloquartz.com |
| 122 | Perkin Elmer Optoelectronics | 74 | 978-745-3200 | 978-745-0894 | www.perkinelmer.com |
| 123 | Phase Components Ltd. | 122-1* | +01403-241862 | +01403-241858 | www.phasecomponents.co.uk |
| 124 | Phoenix Microwave Corp. | 57 | 215-723-6011 | 215-723-6015 | www.stellexms.com |
| 125 | Picosecond Pulse Labs Inc. | 134 | 303-443-1249 | 303-447-2236 | www.picosecond.com |
| 126 | Precision Tube/Coaxitube Division | 100 | 410-546-3911 | 410-546-3913 | www.precisiontube.com |
| 127,128,129 | QMI Tensolite | 13,103,167 | 800-362-FLEX | 978-988-9393 | www.qminc.com |
| 130 | Quasar Microwave Technology Ltd. | 56 | +44-1626-834222 | +44-1626-832994 | www.qmtl.com |
| 131 | Quinstar Technology Inc. | 164 | 310-320-1111 | 310-320-8968 | www.quinstar.com |
| 132 | Raltron | 180 | 305-593-6033 | 305-594-3973 | www.raltron.com |
| 133 | Reactel | 131 | 301-519-3660 | 301-519-2447 | www.reactel.com |
| 134 | Remec Inc. | 24 | 1-877-66-REMEC | 408-432-1551 | www.remecmagnum.com |
| 135 | Remec Inc. | 26 | 416-252-5602 | 416-253-7077 | www.remec.com |
| 136 | Remec Inc. | 28 | 800-226-1772 | 321-727-3729 | www.remecq-bit.com |
| 137 | RF Globalnet | 145 | | | www.rfglobalnet.com |
| 138 | RF Micro Devices | 46–47 | 336-664-1233 | 336-931-7454 | www.rfmd.com |
| 139 | Richardson Electronics | 81 | 1-800-RFPOWER | 630-208-2550 | www.rfpowernet.com |
| 140 | RJR Polymers | 44 | 510-638-5901 | | www.rjrpolymers.com |
| 141 | RLC Electronics Inc. | 23 | 914-241-1334 | 914-241-1753 | www.rlcelectronics.com |
| | Rogers Corporation | 192 | 480-961-1382 | 480-961-4533 | www.rogers-corp.com/mwu/info.htm |
| 143 | Sage Laboratories | 37 | 508-653-0844 | 508-653-5671 | www.sagelabs.com |
| 145 | Satellink | 186 | 972-487-1334 | 972-487-1204 | e-mail: info@satellink.com |
| 146 | Sector Microwave Industries Inc. | 186 | 516-242-2300 | 516-242-8158 | e-mail: sales@sectormicrowave.com |
| 147 | Signal Technology | 159 | 480-940-1655 | 480-961-6297 | www.sigtech.com |
| 148 | Sivers Ima AB | 181 | +46-8-7036807 | +46-8-7519271 | www.siversima.se |
| 11 | Special Hermetics Products Inc. | 189 | 603-654-2002 | 603-654-2533 | www.shp-seals.com |
| 150 | Spectrum | 117-1* | +49-89-354-8040 | +49-89-354-80490 | e-mail: speceiek@compuserve.com |
| 151 | Spinner North America | 124 | 770-263-6326 | 770-263-6329 | www.spinnerna.com |
| 152 | SSI Cable Corporation | 114 | 360-426-5719 | 360-426-5912 | www.ssicable.com |

ADVERTISING INDEX

# ADVERTISING INDEX

| Circle No. | Advertiser | Page No. | Phone | Fax | Web/E-Mail Address |
|---|---|---|---|---|---|
| 153 | SSPA Microwave | 178 | 905-565-0558 | 905-565-0588 | www.sspamicrowave.com |
| 154 | Stanford Microdevices | 83 | 800-764-6642 | | www.stanfordmicro.com |
| | State of the Art | 188 | 800-458-3401 | 814-355-2714 | www.resitor.com |
| 155,156 | Stealth Microwave | 104,186 | 609-538-8586 | 609-538-8587 | www.ssbtech.com |
| 157,158,159 | Synergy Microwave Corp. | 59,91,173 | 973-881-8800 | 973-881-8361 | www.synergymwave.com |
| 149 | Techtrol Cyclonetics Inc. | 106 | 717-774-2746 | 717-774-6799 | www.tci-ant.com |
| 160 | Temex Components | 123 | 1-623-780-1995 | +33-1-48-581046 | www.temex-components.com |
| 161 | Testmart | 16 | | | www.testmart.com |
| 162 | Texas Bruizing | 186 | 972-552-3706 | 972-226-9724 | e-mail: tbi.sales@usa.net |
| 163 | Thomson Microsonics | 140 | +33-0492-9640-00 | +33-0492-9630-25 | www.microsonics.<br>thomson-csf.com |
| 164,165,166 | Thomson Tubes | 193,199,201 | | | www.tctus.com |
| 167 | TLC Precision Wafer Tech. | 184 | 612-341-2795 | 612-341-2799 | www.tlcprecision.com |
| 168 | Trilithic Inc. | 137 | 800-874-5454 | 317-895-3612 | www.trilithic.com |
| 169 | Tru-Connector | 60 | 978-532-0775 | 978-531-6993 | www.tru-con.com |
| 170 | TSAT AS | 186 | +47-2303-73-60 | +47-2303-73-61 | www.tsat.no |
| 171 | T-Tech Inc. | 52 | | 770-455-0970 | www.t-tech.com |
| 36 | Vari-L | COV 3 | 303-371-1560 | 303-371-0845 | www.vari-l.com |
| 172 | Vectorfields | 182 | 630-851-1734 | 630-851-2106 | www.vectorfields.com |
| 173 | Vectron International | 125 | 1-88-VECTRON | 1888-FAX-VECTRON | www.vectron.com |
| 174 | W.L. Gore & Associates | 69 | 800-445-4673 | 302-738-5993 | www.goremicrowave.com |
| 175 | Watkins Johnson Co. | 31 | 800-951-4401 | 650-813-2447 | www.wj.com |
| 176 | Werlatone | 93 | 914-279-6187 | 914-279-7404 | www.werlatone.com |
| 177,178, | Z-Communications | 113,115 | 619-621-2700 | 619-621-2722 | www.zcomm.com/ |
| 179,180,181 | | 139,149,151 | | | |
| 182 | ZETA | 147 | 408-434-3600 | 408-433-0205 | www.zeta-idt.com |

*Euro-Global only

*Visit* Microwave Journal *on the Web at* **www.mwjournal.com**

microwave JOURNAL

**MAY 2000 ISSUE**

- **MTT-S IMS Technical Program**
- **Hynes Convention Center Floor Plan and Exhibitor List with Booth Numbers**
- **Things to Do and Places to Eat in Boston**

## SALES REPRESENTATIVES

*the microwave journal*


**Harlan Howe, Jr., Publisher**

**Eastern and Central Time Zones**

Carl Sheffres
*National Sales Mgr.*
685 Canton Street
Norwood, MA 02062
Tel: (781) 769-9750
FAX: (781) 769-5037
e-mail:
csheffres@mwjournal.com

Tim O'Callaghan
*Eastern Reg. Sales Mgr.*
685 Canton Street
Norwood, MA 02062
Tel: (781) 769-9750
FAX: (781) 769-5037
e-mail: tocallaghan
@mwjournal.com

**Eastern and Central Time Zones**

Ed Johnson
*Associate Publisher*
PO Box 5962
Ocala, FL 34478-5962
Tel: (352) 620-2442
FAX: (352) 620-2443

**Pacific and Mountain Time Zones**

Wynn Cook
*Western Reg. Sales Mgr.*
PO Box 23200
San Jose, CA 95153
Tel: (408) 224-9060
FAX: (408) 624-6106
e-mail:
wynncook@ix.netcom.com

**Ed Johnson, Associate Publisher**

**International Sales**

Sam Baird
*Manager – Europe*
Michel Zoghob
Gareth Watson
46 Gillingham Street
London SW1V 1HH,
England
Tel: +44 20 7596 8740
FAX: +44 20 7596 8749

**Australia**

James Tonkin
Tonkin Media Pty. Ltd.
300 Scenic Highway
Terrigal NSW 2260, Australia
Tel: +61 43 85 1746
FAX: +61 43 85 2017

**Germany, Austria, and Switzerland (German-speaking)**

Juergen Wissling
Wissling Marketing Services
Riedstrasse 5
72813 St. Johann-
Wuertingen
Germany
Tel: +49 7122 929310
FAX: +49 7122 929330

**Michelle Carletti, Traffic Administrator**

**Japan**

Konichi Takefusa
Ayumi Inc.
Arpias Hiroo, 2F, 5-17-11
Hiroo, Shibuya-ku,
Tokyo 150, Japan
Tel: +81 3 3443 0895
FAX: +81 3 3443 0871

**Korea**

Young-Seoh Chun
JES Media International
2nd Floor, ANA Bldg.
257-1, Myungil-Dong
Kangdong-Gu
Seoul, 134-070 Korea
Tel: +82 2 481-3411
FAX: +82 2 481-3414

**Taiwan**

Laura Chen
Arco Publications
4 F, No. 5, Sec. 1,
Pa-Te Road
Taipei, Taiwan ROC
Tel: +886-2 396 5128
FAX: +886-2 396 4511

**Israel**

Oreet Ben Yaacov
Oreet International Media
15 Kineret Street
51201 Bene-Berak, Israel
Tel: +972 3 570 6527
FAX: +972 3 570 6526



## Commercial Signal Sources

- High Performance Voltage Controlled Oscillator Modules
- High Performance PLL Synthesizer Modules



## Military Signal Sources

- Ruggedized High Performance Hybrid
- Voltage Controlled Oscillators



## Commercial Signal Processing

- High Performance Wideband RF Transformers
- High Performance Power Dividers and Couplers
- High Performance Double Balanced Mixers
- High Performance RF Chokes
- High Performance Bias Tees



## Military Signal Processing

- Ruggedized Double Balanced Mixers
- Ruggedized Wideband RF Transformers
- Ruggedized Power Dividers and Couplers
- Ruggedized I/Q Modulators and Demodulators



## Commercial Special Assemblies

- Special Frequency Conversion Modules
- Special Frequency Generation Modules



## Military Special Assemblies

- Ruggedized Special Frequency Generation Assemblies
- Ruggedized Special Frequency Conversion Assemblies
- Ruggedized Special RF Distribution Assemblies



## Subscriber Signal Sources

- Miniature Voltage Controlled Oscillator Modules
- Miniature PLL Synthesizer Modules

# VARI-L

*We Have A Part In Your Future*

CIRCLE 36 ON READER SERVICE CARD


4895 Peoria Street
Denver, Colorado 80239
☎ 303.371.1560
fax 303.371.0845
e-mail: sales @ vari-l.com


VARI-L is a precision manufacturer of RF components for a wide range of aerospace, commercial, military, space and subscriber applications.

At VARI-L, our continued focus on research and development and commitment to enhancing manufacturing technology is intended to ensure that "We have a part in your future."



PROUDLY MADE IN THE USA

Contact the VARI-L Sales Department for your special microwave and RF component assembly needs.

ISO 9001 Certified

VARI-L Company, Inc. www.vari-l.com

# CLEARLY THE BEST.

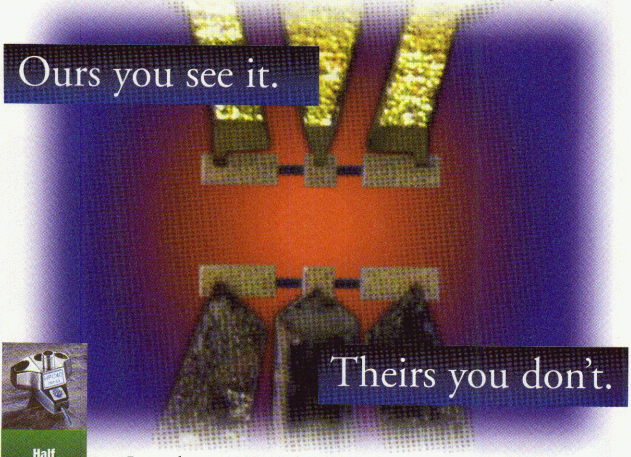




**Half the Insertion Loss**

**2x Better Crosstalk**

**Best Tip Visibility**

**Fully Deembedded Data**

## Introducing Cascade's New High Performance Characterization Probes

**Take a good look at our HPC Probe.**
Cascade Microtech's new High Performance Characterization probe is clearly ahead of the competition. The HPC40 has half the insertion loss, 2x better crosstalk, and the best tip visibility in the industry. That means you see better measurements. And that makes you look good.

**Probe Tip, Know Thyself.**
Unlike any other probe tip, each HPC Probe comes with its own individual set of fully deembedded data. Add our custom ISS and WinCal calibration software, and you can fine-tune your test environment and make high quality S-parameter measurements in record time.

**Don't just believe your eyes, here's our introductory FREE probe offer.**
For a limited time, when you buy a pair of HPC40 probes, you'll get your 3rd probe FREE! Visit the Cascade website for complete product specifications and offer details.

Cascade Microtech, Inc.
In the U.S. call us at 1-800-550-3279
Tel: (503) 601-1000 Fax: (503) 601-1002
E-mail: sales@cmicro.com
Japan: 03 5478-6100
Europe: +44 (0) 1295-812828
www.cascademicrotech.com

HEWLETT-PACKARD
Channel Partner

CASCADE® MICROTECH

*Partners with Hewlett-Packard in Innovative Measurement Solutions*

©1998, Cascade Microtech, Inc.

**CIRCLE 33: HAVE A SALES ENGINEER CONTACT ME**