

*Practical*

APRIL 1987 £1.10

ISSN 0141-0857

# Wireless

*The Radio Magazine*

**FREE INSIDE - DATACARD**

UK ONLY

**70cm Repeaters**

WORTH 50p

**Build The PW 'Itchen'  
LCR Bridge**



**New Series -  
Test Methods & Equipment**

**PLUS  
Simple Discriminating Continuity Tester**



# Reg Ward & Co. Ltd.

1 Western Parade, West Street, Axminster, Devon, EX13 5NY.

Telephone: Axminster (0297) 34918

## Yaesu

FT1	HF Transceiver	P.O.A. (—)
FT980	HF Transceiver	1750.00 (—)
SP980	Speaker	110.00 (2.50)
FT767	2m Module (767)	1550.50 (1.50)
FEX767(12)	70cm Module (767)	169.00 (2.50)
FEX767(10)	6m Module (767)	215.00 (2.50)
FEX767(16)	Speaker	169.00 (2.50)
SP102	Speaker	75.00 (2.00)
SFT290	MkII New Super 290	429.00 (—)
FT290	2m M-Mode Port/Transceiver	379.00 (—)
FT290	With Mutek front end fitted	409.00 (—)
MMB11	Mobile Bracket	37.50 (1.50)
NC11	Charger	10.50 (1.50)
CSC1	Carrying Case	6.50 (1.50)
YHA145	2m Helical	7.50 (1.50)
YHA44D	70cm 12watt	10.00 (1.50)
YMA9	Speaker Mike	22.00 (1.50)
MMB15	Mobile Bracket	14.55 (1.50)
FT23	2m Mini H/H	249.00 (2.50)
FT27	70cm Mini H/H	£269.00 (2.50)
FN89	Spare Battery Pack (23/73)	23.00 (1.50)
FN810	Spare Battery Pack (23/73)	25.00 (1.50)
FN811	Spare Battery Pack (23/73)	42.00 (1.50)
NC.18C	Charger (23/73)	10.50 (1.50)
NC.28	Charger (23/73)	11.00 (1.50)
NC.29	Base Charger (23/73)	49.00 (2.50)
PA6	Car Adap/Charger (23/73)	14.50 (1.50)
MH12A2B	Speaker Mic	22.00 (1.50)
FT27	2m/70cm H/H	425.00 (3.00)
FN83	Spare Battery Pack	40.00 (1.50)
FN84	Spare Battery Pack	45.00 (1.50)
FN85	Empty Cell Case	9.00 (1.50)
FT209R	70cm H/H	299.00 (—)
FT209R	70cm H/Held/CW FNB3	319.00 (—)
FT270R	2m 25W F.M.	399.00 (—)
FT270R	2m 45W F.M.	469.00 (—)
FT2700R	2m/70cm/25W/25W	499.00 (—)
FRG9600	60-905MHz Scanning RX	525.00 (—)
MMB10	Mobile Bracket	10.00 (1.50)
NC9C	Charger	10.35 (1.50)
PA3	Car Adaptor/Charger	20.50 (1.50)
FN82	Spare Battery Pack	25.00 (1.50)
YMA24R	Speaker Mike	27.00 (1.50)
FT272R	2m Base Station	999.00 (—)
430726	PTT Switch Box 290/790	349.00 (3.00)
FRG8800	HF Receiver	639.00 (—)
FRV8800	Converter 118-175 for above	100.00 (2.00)
FRT7700RX	A.T.U.	59.00 (2.00)
MH188	Hand 600 8pin mic	20.00 (1.50)
MD188	Desk 600 8pin mic	79.00 (1.50)
MF1A3B	Boom mobile mic	25.00 (1.50)
YH77	Lightweight phones	19.50 (1.50)
YH55	Padded phones	19.50 (1.50)
YH1	Lweight Mobile H/set-Boom mic	19.00 (1.50)
SB1	PTT Switch Box 208/708	21.00 (1.50)
SB2	PTT Switch Box 290/790	21.00 (1.50)
SB10	PTT Switch Box 270/2700	21.00 (1.50)
FF501DX	Low Pass Filter	37.50 (1.50)

## Linear Amps

<b>TOKYO HI POWER</b>		
HL 160V	2m, 10W in, 160W out	244.52 (2.50)
HL 82V	2m, 10W in, 85W out	144.50 (2.50)
HL 110V	2m, 10W in, 110W out	249.00 (2.50)
HL 35V	2m, 3W in, 30W out	16.00 (2.50)
HL 30	2m, 3W in, 30W out	54.00 (2.50)
HL 20U	70cms, 3W in, 20W out	122.50 (2.50)
<b>MICROWAVE MODULES</b>		
MML144/30-LS	inc preamp (1/3 w i/p)	96.90 (2.50)
MML144/50-S	inc preamp, switchable	106.95 (2.50)
MML144/100-S	inc preamp (10w i/p)	149.95 (3.00)
MML144/100-HS	inc preamp (25w i/p)	159.95 (3.00)
MML144/100-LS	inc preamp (1/3w i/p)	169.95 (3.00)
MML144/200S	inc preamp (3/10/25 i/p)	369.84 (3.00)
MML432/30L	inc preamp (1/3w i/p)	169.05 (3.00)
MML432/50	inc preamp (10w i/p)	149.50 (2.50)
MML432/100	linear (10w i/p)	334.65 (3.00)
<b>B.N.O.S.</b>		
LPM 144-1-100	2m, 1W in, 100W out, preamp	235.00 (3.00)
LPM 144-3-100	2m, 3W in, 100W out, preamp	235.00 (3.00)
LPM 144-10-100	2m, 10W in, 100W out, preamp	205.00 (3.00)
LPM 144-25-180	2m, 25W in, 180W out, preamp	305.00 (3.00)
LPM 144-3-180	2m, 3W in, 180W out, preamp	355.00 (3.00)
LPM 144-10-180	2m, 10W in, 180W out, preamp	355.00 (3.00)
LP 144-3-50	2MN 50W out, preamp	145.00 (3.00)
LP 144-10-50	2M 10W in, preamp	145.00 (3.00)
LPM 432-1-50	70cm, 1W in, 50W out, preamp	255.00 (3.00)
LPM 432-3-50	70cm, 3W in, 50W out, preamp	255.00 (3.00)
LPM 432-10-50	70cm, 10W in, 50W out, preamp	215.00 (3.00)
LPM 432-10-100	70cm, 10W in, 100W out, preamp	395.00 (3.00)
LPM 432-3-100	70cm, 3W in, 100W out, preamp	395.00 (3.00)

## SWR/PWR Meters

<b>HANSEN</b>		
FS50VP	50-150MHz 20/200 Interval PEP/SWR	106.70 (2.50)
FS300V	50-150MHz 20/200 PWR/SWR	53.50 (2.50)
FS300H	1.8-60MHz 20/200/10W	53.50 (2.50)
FS210	1.8-150MHz 20/200 Auto SWR	63.50 (2.50)
W720	140-430MHz 20/200W	41.50 (2.50)
<b>WELZ</b>		
SP10X	1.8-150MHz PWR/SWR	39.95 (2.50)
SP122	1.8-60MHz PWR/SWR/PEP	79.95 (2.50)
SP220	1.8-200MHz PWR/SWR/PEP	67.95 (2.50)
SP225	1.8-200MHz PWR/SWR/PEP	119.95 (2.50)
SP420	140-525MHz PWR/SWR/PEP	74.95 (2.50)
SP425	140-525MHz PWR/SWR/PEP	119.95 (2.50)
SP825	1.8-200-430-800-1240MHz	179.00 (2.50)
<b>TOYO</b>		
T430	144/432 120 W	52.50 (2.50)
T435	144/432 200 W	58.00 (2.50)

## Scanning Receivers

SMC8400	VHF/UHF Scanner	249.00 (3.00)
SX200	VHF/UHF Scanner	325.00 (3.00)
SX400	VHF/UHF Continuous Coverage	645.00 (3.00)
AOR2002	VHF/UHF Continuous Coverage	487.30 (3.00)
HX2000	H/H Scanner	269.00 (3.00)

## Icom Products

IC751A	HF Transceiver	1465.00 (—)
IC745	HF Transceiver	P.O.A. (—)
IC735	New HF Transceiver	949.00 (—)
AT100	100W ATU (75/745)	365.00 (3.50)
AT150	150W ATU (735)	315.00 (3.50)
PS55	Ext PSU (735)	185.00 (3.00)
IC505	50MHz multi-mode portable	459.00 (—)
IC290D	25W FM/Mode	542.00 (—)
IC28E	2m H/H	325.00 (—)
IC28H	2m 45W FM	399.00 (3.00)
IC28E	2m New Mini H/H	259.00 (3.00)
IC2E	2m The Original H/H	225.00 (3.00)
IC2E	2m H/H	299.00 (3.00)
IC275E	New 2m 25 Base Stn	1029.00 (—)
IC4E	70cm H/H	285.00 (3.00)
IC40E	70cm H/H	299.00 (3.00)
IC48E	70cm 25W FM Mobile	449.00 (3.00)
IC490	70cm 10W M/Mode	617.00 (—)
IC3200	2m/70 Dual Band FM Mobile	556.00 (—)
IC12E	23cm H/H	428.00 (3.00)
ICR71	Gen Cov RX	825.00 (—)
BP3	Battery Pack 8.4V (2/4E/02/04E)	957.00 (—)
L7000	VHF/UHF Scanner	957.00 (—)
AH7000	25-1300MHz Discone	82.00 (2.50)
SP3	Ext Speaker	61.00 (2.50)
CK70	DC Cable (R70/R71)	7.00 (1.50)
EX257	FM Board (R70/R71)	41.00 (1.50)
GC5	World Clock	43.00 (2.00)

## HAND HELD ACCESSORIES

AQ2	Waterproof Bag all Icom H/H	14.38 (1.50)
BC35	Desk Charger	70.15 (2.00)
BP3	Battery Pack 8.4V (2/4E/02/04E)	29.30 (1.50)
BP4	Empty Battery Case (2/4E/02/04E)	9.20 (1.50)
BP5	Battery Pack 10.8V	60.95 (2.00)
BP6	Battery Pack 13.2V (02/04E only)	74.75 (2.00)
BP8	Battery Pack 8.4V	71.30 (2.00)
CP1	12v Charge Lead BP3/7/8	10.00 (1.50)
DC1	DC/DC converter operate from 12v	17.25 (1.50)
FA2	2m Helical BNC	9.20 (1.50)
FA3	70cm Flexible 1/4 Antenna (BNC)	9.20 (1.50)
HV9	Speaker/Mic	21.85 (2.00)
HS10	Head set Boom Mike	20.70 (1.50)
HS10SA	Vox Unit HS10 (02/04E only)	25.30 (1.50)
HS10SB	PTT SW Box HS10	20.70 (1.50)
LC1	Leatherette Case 2E/4E + BP5	6.90 (1.50)
LC3	Leatherette Case 02E/04E + BP3	6.90 (1.50)
LC11	Leatherette Case 02E/04E + BP3	9.20 (1.50)
LC14	Leatherette Case 02E/04E + BP5/7/8	9.20 (1.50)
SS1	Shoulder Strap	10.35 (1.50)

## OTHER ACCESSORIES

SM6	800ohm 8P Base Mic	46.00 (2.00)
SM8	1.3K/600K 8P Base Mic	82.00 (2.00)
SM10	Comp/Graphic Mike	116.00 (2.50)

## Oscar Antennas

2QW	2m 1/4 wave element	3.15 (1.50)
2NE	2m 1/2 wave element	8.54 (2.00)
2V13	2m 1/2 wave element	16.13 (2.00)
78F	2m 1/8 wave element	21.15 (2.00)
88F	2m 1/8 wave element	24.10 (2.00)
258	70cm 2 x 1/8 wave element	29.37 (2.00)
358	70cm 3 x 1/8 wave element	33.73 (2.00)
70N2M	2m & 70cm Dual band element	24.95 (2.00)
70N2DX	2m & 70cm Dual band element	37.35 (2.00)
GCCA	2m & 70cm Duplexer	24.95 (2.00)
SOCCA	Gutter clamp 4m cable	14.25 (1.50)
TCMCA	5m Cable	6.00 (1.50)
SOMM	TRVHK Mount + 6m cable	12.75 (1.50)
SOWM	Mag. Mount	12.75 (1.50)
VHFL	Adjustable Wing Mount	6.00 (1.50)
GP144W	Discone 65-520MHz	22.50 (2.50)
GP432	2m 2 x 1/8 Colinear	42.00 (3.00)
70H2V	70cm 3 x 1/8 Colinear	47.50 (3.00)
	2m & 70cm Dual Band Colinear	47.00 (3.00)

## Datong Products

PC1	Gen. Cov. Con.	137.40 (2.00)
VLF	Very low frequency conv.	34.90 (2.00)
FL2	Multi-mode audio filter	95.70 (2.00)
FL3	Audio filter for receivers	129.00 (2.00)
ASBP	r.f. speech clipper for Trio	82.80 (2.00)
ASPA	r.f. speech clipper for Yaesu	82.80 (2.00)
ASP	As above with 8 pin conn	89.70 (2.00)
D75	Manual RF speech clipper	56.35 (2.00)
MK	Morse Tutor	56.35 (2.00)
RFA	Keyboard morse sender	137.40 (2.00)
AD270-MPU	RF switched pre-amp	36.00 (2.00)
AD270-MPU	Active dipole with mains p.s.u.	51.75 (2.00)
MPU	Active dipole with mains p.s.u.	69.00 (2.00)
DC144/28	Mains power unit	6.90 (2.00)
PTS1	2m converter	39.67 (2.00)
ANF	Tone squelch unit	46.00 (2.00)
SRB2	Automatic notch filter	67.85 (2.00)
	Auto Woodpecker blanker	86.25 (2.00)

## CW/RTTY Equipment

Tono 550	Reader	329.00 (3.00)
ICS/AEA PK64	Complete Packet/Amort terminal	239.00 (3.00)
PX232	Packet/RTTY Terminal	269.00 (3.00)
<b>BENCHER</b>		
BY1	Squeeze Key, Black base	67.42 (2.50)
BY2	Squeeze Key, Chrome base	76.97 (2.50)
<b>HI-MOUND MORSE KEYS</b>		
HK703	Up down keyer	38.35 (2.00)
HK704	Up down keyer	26.35 (2.00)
HK706	Up down keyer	21.80 (2.00)
HK707	Up down keyer	20.15 (2.00)
HK710	Up down keyer	39.95 (2.50)
HK802	Up down solid brass	109.00 (2.50)
HK808	Up down solid brass	104.50 (2.50)
HK703	Up down keyer	39.95 (2.00)
HK703	Twin paddle keyer metal base	34.50 (2.00)
HK706	Twin paddle keyer marble base	32.78 (2.00)
KEPRO KP200	Squeeze CMOS 230/13.8v	109.25 (3.00)
KEPRO KP200	Memory 4096 Multi Channel	234.55 (3.00)

## Trio

TS940S	9 Band TX General Cov RX	1995.00 (—)
AT940	Auto/ATU	258.23 (2.50)
SP940	Ext Speaker	92.32 (2.50)
TS930S	9 Band TX General Cov RX	1750.00 (—)
AT930	Auto/ATU	192.75 (2.50)
SP930	Ext Speaker	90.94 (2.50)
TS440	NEW 9 Band TX General Cov RX	1195.00 (—)
AT440	Auto/ATU	152.73 (2.50)
SP440	H/Duty PSU	234.63 (2.50)
TS830S	160-10m Transceiver 9 Bands	1095.00 (—)
AT230	All Band ATU/Power Meter	185.90 (2.50)
SP230	External Speaker Unit	70.12 (—)
TS530SP	160m-10m Transceiver	895.00 (—)
TS430S	160m-10m Transceiver	995.00 (—)
EB330	Matching Power Supply	183.26 (3.50)
SP430	Matching Speaker	43.00 (2.50)
MB430	Mobile Mounting Bracket	16.66 (2.50)
FM430	FM Board for TS430	50.68 (2.50)
SM220	Station Monitor	362.37 (3.50)
B55	Band Scope Unit (520/530)	72.05 (2.00)
B58	Band Scope Unit (830/940)	81.22 (2.00)
TL222	10/160 2K Linear	1495.00 (7.00)
TM201A	2M 25W Mobile FM	358.00 (3.00)
TM401A	70cm 12W Mobile FM	392.82 (3.00)
TH21	2M Mini H/H	228.00 (2.50)
TH41	70cm Mini H/H	268.00 (2.50)
TR51	2M 25W M/M Mobile	649.00 (—)
TS711	2M 25W Base Stn	991.29 (—)
TS811	70cm 25W Base Stn	1085.00 (—)
R2000	Gen Coverage HF/RX	637.26 (—)
VC10	118-174MHz Converter (R2000)	170.76 (2.00)
R5000	NEW General Coverage HF/RX	895.00 (—)
VC20	118-174MHz Converter (R5000)	176.32 (2.00)

## HAND HELD ACCESSORIES

BT2	Empty Battery Case TH21/41	12.50 (1.50)
DC21	DC Power Supply TH21/41	26.38 (1.50)
EB2	Ext. Battery Case TH21/41	17.85 (1.50)
HM1	Headset with Vox TH21/41	34.71 (1.50)
PM21	Nicad Pack TH21/41	25.68 (1.50)
BC6	Desk Charger TH21/41	106.21 (2.00)
SC8	Soft Case TH21/41	12.50 (1.50)
SMC30	Speaker/Mic TH21/4/2600	29.85 (1.50)

## ACCESSORIES

MC50	4P Desk Mic	48.59 (2.50)
MC60A	8P Desk Mic	93.02 (2.50)
MC80	Electric Desk Mic	56.35 (2.50)
MC85	Desk Mic Audio Level Comp	107.55 (2.50)
MC42	8P Fist Mic	22.22 (1.50)
MC35	4P Fist Mic	22.91 (1.50)
MC55	Mobile Mic (6br 8p)	55.53 (2.50)
LF30	HF Low Pass Filter	34.02 (2.00)
KX3	Receiver ATU (Mizuhou)	67.28 (2.50)
HS6	Lightweight H/phones	25.68 (2.00)
HS5	Deluxe H/phones	39.57 (2.00)
SW100A	SWR/Power Meter 1.8-150MHz	52.76 (2.00)
SW100B	SWR/Power Meter 140-450MHz	52.76 (2.00)
SW200A	SWR/Power Meter 1.8-150MHz	113.85 (2.50)
SW200B	SWR/Power Meter 140-450MHz	113.85 (2.50)
SW2000	SWR/Power Meter 1.8-54MHz 2K	123.57 (2.50)
SWT1	2m ATU	40.26 (2.00)



# Practical Wireless

The Radio Magazine

APRIL 1987 VOL. 63 NO. 4 ISSUE 961

## NEXT MONTH

Mods for the AR-2001

Versatile Signal Tracer

"I Have a Message For You"—The Case for Third Party Traffic

The Icom IC-28E 2m Mobile Rig Reviewed

and

Another PW Special Offer: Black Star 600MHz Frequency Counter

Don't miss it—place your order with your newsagent now!

**On sale April 9**

Contents subject to last-minute revision

### ★FREE WITH THIS ISSUE★ 70cm Repeater Dacard

- 24 Kit Construction—It's Easy**  
Spectrum FTX201/FM1000 Transmitter/Modulator  
*Elaine Richards G4LFM*
- 25 The Vin Plonk Special**  
*Richard Q. Marris*
- 26 PW "Blandford" Receive Converter—2**  
*Ray Howgego G4DTC*
- 30 Errors and Updates**  
Award Chasing on Satellites, Jan. 1987. Transceiver Power Unit, Sep. 1980 and Practical Power Supplies Reprint
- 32 Discriminating Continuity Tester**  
*M. P. Clarke*
- 34 Test Methods and Equipment—1**  
*Ray Steele*
- 38 PW "Itchen" LCR Bridge**  
*John Thornton Lawrence GW3JGA*
- 44 Antenna Radiation Patterns Computerised—3**  
*Dr L. W. Brown G0FFD and F. C. Judd G2BCX*
- 46 HF Band Antennas for Difficult Locations—3**  
*F. C. Judd G2BCX*
- 50 PW Review**  
The Lowe HF-125 HF Receiver, Part 2
- 52 Obituary**  
*Eric Dowdeswell G4AR*

### Regular Features

- |                       |                 |                  |
|-----------------------|-----------------|------------------|
| 72 Advert Index       | 19, 33 News     | 17 PW Services   |
| 30 Benny              | 53 On the Air   | 47, 69 Swap Spot |
| 48 Book Service       | 49 PCB Service  | 16 Write On      |
| 16 Comment            | 21, 52 Products |                  |
| 16 Laugh with Barthes | 43 PW Programs  |                  |

### Editorial and Advertisement Offices:

Practical Wireless  
Enefco House  
The Quay  
Poole, Dorset BH15 1PP

☎ Poole (0202) 678558 (Out-of-hours service by answering machine)  
Prestel 202671191

**Editor** Geoff Arnold T.Eng FSERT G3GSR  
**Assistant Editor** Dick Ganderton C.Eng. MIERE G8VFH  
**Art Editor** Steve Hunt  
**Technical Features Editor** Elaine Richards G4LFM  
**Technical Projects Sub-Editor** Richard Ayley G6AKG  
**Technical Artist** Rob Mackie  
**Advertisement Manager** Roger Hall G4TNT  
☎ 01-731 6222  
**Administration Manager** Kathy Moore  
**Clerical Assistant** Claire Horton  
**Accounts** Annette Martin

COPYRIGHT © PW Publishing Limited 1987. Copyright in all drawings, photographs, and articles published in *Practical Wireless* is fully protected and reproduction or imitation in whole or in part is expressly forbidden. All reasonable precautions are taken by *Practical Wireless* to ensure that the advice and data given to our readers are reliable. We cannot however guarantee it and we cannot accept legal responsibility for it. Prices are those current as we go to press.

*Practical Wireless, April 1987*

THIS MONTH

## LOWE SHOPS.

**In Glasgow,**  
the shop manager is Sim, GM3SAN,  
the address, 4/5 Queen Margaret Road,  
off Queen Margaret Drive, Glasgow,  
telephone 041-945 2626.

**In the North East,**  
the shop manager is Hank, G3ASM,  
the address, 56 North Road, Darlington,  
telephone 0325 486121.

**In Cambridge,**  
the shop manager is Tony, G4NBS,  
the address, 162 High Street, Chesterton, Cambridge,  
telephone 0223 311230.

**In Cardiff,**  
the shop manager is Carl, GWOCAB,  
the address, c/o South Wales Carpets, Clifton Street, Cardiff,  
telephone 0222 464154.

**In London,**  
the address, 223/225 Field End Road, Eastcote, Middlesex,  
telephone 01-429 3256.

**In Bournemouth,**  
the shop manager is Colin, G3XAS,  
the address, 27 Gillam Road, Northbourne, Bournemouth,  
telephone 0202 577760.

**Although not a shop,** there is on the South Coast a source of good advice and equipment, John, G3JYG. His address is Abbotsley, 14 Grovelands Road, Hailsham, East Sussex. An evening or weekend call will put you in touch with him. His telephone number 0323 848077.

**Lowe Electronic Shops** are open from 9.00 am to 5.30 pm, Tuesday to Friday and from 9.00 am to 5.00 pm on Saturday. Shop lunch hours vary and are timed to suit local needs. For exact details please telephone the shop manager.

## AR2002 receiver



**Frequency range of the AR2002** is from 25 to 550 and from 800 to 1300 MHz. Modes of operation are wide band FM, narrow band FM and AM. The receiver has 20 memories, memory scan and a search mode which checks frequencies between user designated limits.

The receiver has a push button keypad for easy frequency entry and operation.

A front panel knob allows the listener to quickly step up or down in either 5, 12.5 or 25 kHz steps from the frequency initially chosen.

The AR2002 has a front panel LED bar "S" meter.

There is a front panel 3.5 mm jack socket for headphone use.

A socket for the optional RS232 interface (RC PACK) is provided on the rear panel. The RC PACK consists of an 8 bit CPU with its own ROM and RAM and with your own computer acting as a dumb terminal many additional operating facilities become available. Of course, if you want to write your own programs using the RC PACK as an interface then "the sky's the limit".

**AR2002 Receiver . . . £487.30 inc VAT, carriage £7.00**

## from TRIO, a **new** short wave receiver, the **R5000**.



**The R5000 is a new general coverage receiver. It offers the dedicated short wave listener and radio amateur a receiver that will match the performance of the best transceivers available today.**

**The R5000's frequency range** is continuous from 100 kHz to 30 MHz and its modes of operation are USB, LSB, CW, AM, FM and FSK. An optional VHF converter (VC20) extends the frequency range to include 108 to 174 MHz.

**The R5000 uses** 2SK 125 junction-type FETs in the high sensitivity direct

balanced first mixer resulting in outstanding two signal characteristics and a substantially improved noise floor level.

**Operating from either 12 V DC or 240 V AC** the receiver can be used both in the home or whilst out in car, caravan or boat.

**The receiver has** two rates of tuning for each mode selected by a front panel switch. The frequency increments for SSB/CW/FSK are 10 Hz and 100 Hz, for AM 100 Hz and 1 kHz and for FM 2.5 kHz and 5 kHz.

**Both low (50 ohms) and high (500 ohms)**

aerial connections are provided on the rear panel of the R5000. The required aerial can be selected by means of a front panel switch. Information on which aerial to be used with a stored frequency can also be held in memory.

**The R5000 has 100 memory channels** which store frequency, mode and which of the two aerial connections has been selected.

Information is easily transferred from one VFO to the other, from memory to VFO and in order to quickly access your favourite station, from VFO to any of the memories. Both memory scan and frequency scan (between frequencies in memories 8 and 9) are included in the receiver. Halt on an occupied channel whilst scanning can either be timed or until the signal drops. The entire one hundred memories can also be quickly scrolled to check the data held and to find the location of an empty channel.

**To enhance reception,** IF shift and a tunable notch filter are part of the R5000 receiver. Filter selection according to mode is automatic when the front panel selectivity switch is set to AUTO. This automatic selection can, of course, be overridden. Additionally the introduction of optional SSB and CW filters (YK88SN for SSB and either YK88C or YK88CN for CW) will improve the already excellent signal to noise ratio and selectivity. The optional YK88A-1 AM filter will improve the shape factor and enhance reception even further.

**The R5000 general coverage receiver also** has keyboard frequency entry, dual mode noise blanker, two 24 hour clocks with timer, option VS1 voice synthesizer and CW tone mode indication for the blind operator, a large 100 mm diameter top mounted speaker, switchable AGC (fast or slow), RF attenuation (10, 20 or 30 dB steps) and a FLOCK switch which protects against frequency shift if the VFO knob is accidentally moved.

**R5000 Receiver . . . £895 inc VAT, carriage £7.00**

## LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 2817, 2430, 4057, 4995.

send £1 for complete mail order catalogue.





# the TRIO TS711E & TS811E, base station rigs for two & seventy.



**The TRIO TS711E two metre base station** is perfection epitomised; receiver sensitivity and the ability to reject unwanted adjacent signals is outstanding. For the serious operator, any other transceiver is unacceptable.

**Similar in specification and appearance** to the TS711E but operating on seventy centimetres is the TRIO TS811E. When used alongside the TS711E, the TS811E completes the ideal equipment line-up and provides the best possible access to the satellites for the VHF/UHF enthusiast.

**The TS711E (TS811E) covers the two metre (seventy centimetre) band from 144 to 146 MHz (430 to 440 MHz).** Operating modes are USB, LSB, CW and FM. When switched to the "auto" position the

transceiver correctly selects mode according to frequency, a great advantage for the blind operator. Simple up/down frequency shift is provided on the front panels and also on the microphones.

**Power output** on all modes is 25 watts. For QRP operation the output can be reduced using a front panel control.

**The TS711E (TS811E) has IF shift**, an essential feature when the band is crowded during a contest. To help work DX, speech processing is also available.

**The transceiver has two separate VFO's and forty memory channels.** Each memory stores frequency, operating mode, whether simplex or repeater shift and if the 1750 Hz tone burst is on or off. The VFO can be either free running as for SSB

or CW operation or electrically switched to a "click" stop for FM where it changes frequency in 12.5 or 5 kHz steps. Frequencies stored in memory can be readily transferred to either VFO A or B. Depending on how the VFO was set when the information was put into memory i.e. click stop or free running VFO, the rig is set the same when the memory information is transferred. It is therefore possible to have SSB frequencies transferred with a free running VFO and FM channels with click stop. A great aid to operating! The second VFO can also be quickly put on the same frequency as the one currently being used, ideal when checking the position of a strong adjacent signal whilst remaining on your operating frequency.

**Frequency scan** on VFO can either be between or outside user set limits. On memory the transceiver can either scan the entire memory content or be instructed to look at those frequencies of a particular mode. The TS711E (TS811E) has a timed hold on an occupied channel.

**Both priority channel** and the immediate recall of your local net frequency are possible with the TS711E (TS811E).

**For those with failing sight or a blind operator the TS711E (TS811E) is a dream come true;** not only is the operating mode identified by the appropriate CW letter sent in tone (F for FM, U for USB etc.) but when fitted with the VS1 optional board, a digitally encoded girl's voice will announce both frequency and, where applicable, whether the rig is switched to repeater shift.

**DCS (digital code squelch)** is also fitted to the TS711E (TS811E).

**TS711E two metre transceiver ... £991.29 inc VAT, carriage £7.00.**

**TS811E seventy centimetre transceiver ... £1095.00 inc VAT, carriage £7.00.**

**VS1 voice synthesizer ... £34.02 inc VAT, carriage £1.00.**

## DAIWA meters

**CN410M ...** Frequency range 3.5 to 150 MHz, forward power switchable 15/150 Watts, reflected 5/50 Watts, SO239 connectors.

**CN460M ...** Frequency range 140 to 450 MHz, forward power switchable 15/150 Watts, reflected 5/50 Watts, SO239 connectors.

**NS448 with remote head ...** Frequency range 900 to 1300 MHz, forward power switchable 5/20 Watts, reflected 1.6/6.6 Watts, N type connectors.

**NS660P ...** switchable meter reading (average, normal PEP and hold PEP) and provision for optional remote head (U66V), frequency range 1.8 to 150 MHz, forward power switchable 15/150/1500 Watts, SO239 connectors.

**U66V ...** remote head, frequency range 140/525 MHz, max 300 Watts, N type connectors.

**SC20 ...** extension cable for U66V, approx 20 metres long.

**CN410M ... £61.72 inc VAT, carriage £1.50.**



**NS660P ... £115.00 inc VAT, carriage £2.50.**

**CN460M ... £65.40 inc VAT, carr £1.50.**

**NS448 ... £86.60 inc VAT, carriage £2.50.**

## airband receivers

**R537S ...** a tunable airband receiver covering 118 to 136 MHz plus the facility for two crystal controlled channels (crystals not included).


**R537S ... £69.51 inc VAT, carriage £2.00. Crystals £4.60 each.**

**R552S ...** an airband receiver scanning four out of six crystal controlled channels (crystals not included). The R552S also has a manual channel selection switch.

**R528 ... £125.36 inc VAT, carriage £2.00. Crystals £4.60 each.**

**R532 ...** not needing crystals, the R532 is a synthesized receiver covering the airbands from 110 to 136 MHz and having 100 programmable memory channels (ten banks of ten). Operating on 12 volts DC, the R532 can be used either mobile or at home with the optional mains power supply. Add a nicad battery pack and carrying case and the R532 is also ideal for portable use.

**R532 ... £224.05 inc VAT, carriage £7.00.**

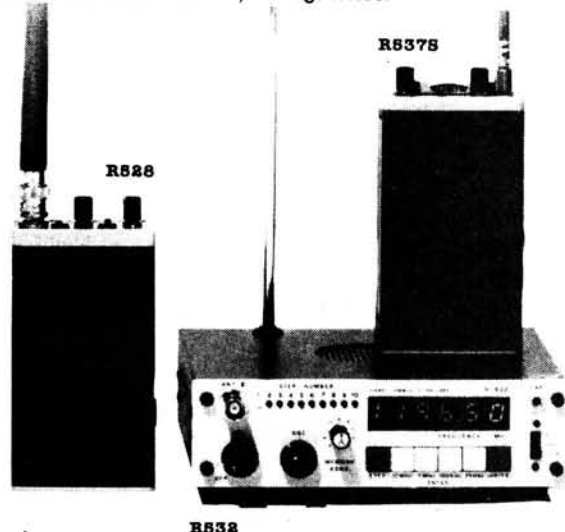

## LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 2817, 2430, 4057, 4995.

send £1 for complete mail order catalogue







**STOP PRESS**  
NEW YAESU SPARES  
DIRECT LINE  
0703 255119  
Mon-Fri 9.00-5.00

## SMC SATELLITE



**RECEIVING  
SYSTEM**

**FROM  
£861.35**

- ★ LNB (1.8dB) £189.75
- ★ Dishes From (1.2Mtr) £304.75

**SR7000  
RECEIVER  
£385.25**

**ANTENNA POSITIONER**



POSITION CONTROLLER AND  
12" JACK  
SUPPLIED AS A PAIR  
£216.20

12" MOTOR JACK

★ **RECEIVE ALL THESE  
EXTRA CHANNELS**

SAT 1 & SAT 3	TV5
Screensport	RAI
Premier	MTV
Filmnet	Superchannel
Childrens Channel	Sky
The Arts Channel	Teleclub
Lifestyle	

**ALL PRICES INCLUDE VAT. CARRIAGE EXTRA**

**SMC - YAESU - SMC**



**FT290R II  
THIS IS THE ONE!**

THE U.K.'S MOST POPULAR 2M PORTABLE BASE STATION HAS BEEN IMPROVED. YES, REALLY! YAESU HAVE DONE THE IMPOSSIBLE.

THE NEW MARK II VERSION OF YAESU'S FAMOUS MULTI-MODE HAS PUSH BUTTON CONTROL, SCANNING SPEAKER/MIC, FULL 144-146 MHZ COVERAGE.

SSB (LOWER OR UPPER), FM AND CW. OPTIONS INCLUDE CUSTOM NICAD BATTERY PACK OR 25W LINEAR AMP AND A HOST OF YAESU ACCESSORIES.

BRIEF SPEC. 2.5W RF OUTPUT ON FM 2 V.F.O.s, PROGRAMMABLE MEMORY SCAN OR MEMORY CHANNEL SCAN, NOISE BLANKER, FM STEPS 12.5/25/50 KHZ ON FM, 25/100/2500 HZ ON SSB AND CW.

**IN SHORT — IT'S A BEAUT! CALL IN AT YOUR NEAREST  
BRANCH AND GET YOUR HANDS ON THIS ONE NOW!**

**PRICE? TELEPHONE TODAY FOR OUR  
BEST PRICE — IN STOCK NOW!**

**SIX METRES? TRY THE FABULOUS  
FT690R II — IN STOCK NOW AT SMC**

**YOU KNOW IT MAKES SENSE! YOUR PASSPORT TO AMATEUR RADIO  
SMC 2 YEAR GUARANTEE\* — YAESU QUALITY**

\*ON YAESU FULL PRICED ITEMS

LEEDS  
SMC (Northern)  
Howell Lane Ind Estate  
Leeds LS9 6JE  
Leeds (0532) 350606

CHESTERFIELD  
SMC (Midlands)  
102 High Street  
New Whittington,  
Chesterfield  
Chest. (0246) 453340  
9.30-5.30 Tues-Sat

BUCKLEY  
SMC (TWP)  
Unit 27, Pinfold Lane  
Buckley, Clwyd  
Buckley (0244) 549563  
10-5 Tues, Weds, Fri  
10-4 Sat

JERSEY  
SMC (Jersey)  
1 Belmont Gardens  
St. Helier, Jersey  
Jersey (0534) 77067  
9-5 pm Mon-Sat  
Closed Wed

N. IRELAND  
SMC N. Ireland  
10 Ward Avenue  
Bangor  
County Down  
0247 271875

Southampton Showroom open 9.00-5.00 Monday to Friday, 9.00-1.00 Saturday. Service Dept open Mon-Fri 9.00-5.00.

AGENTS: JOHN DOYLE, TRANSWORLD COMMS, NEATH (0639) 52374 DAY (0639) 2942 EVE  
BOOTH HOLDINGS, SALTFOED, BRISTOL 02217 2402

DAVID STENNING, LOUTH 0507 604967  
JACK McVICAR, SCOTCOMMS, EDINBURGH 031 657 2430

# ! 2 Year Guarantee !

# South Midlands

**SCHOOL CLOSE, CHANDLERS FO**  
**TEL: 0703 255111** **TLX: 4**

SOUTH MIDLANDS COMMUNICATIONS HAVE NEW TELEPHONE AND FAX NUMBERS. FOR PROMPT DELIVERY OF ALL YAESU PRODUCTS PLEASE

NOTE OUR NEW NUMBERS:

TEL 0703 (SOUTHAMPTON) 255111

FAX 0703 (SOUTHAMPTON) 263507

TLX 477351 SMCOMM G

N.E.C. BIRMINGHAM 27th/28th MARCH.

We look forward to meeting old friends and new ones — come and see us. You'll be most welcome.

**SMC - YAESU - SMC**

**YAESU FT23R & FT73R**

**THE BEST GUARANTEE MONEY CAN BUY**

HEAR THE DIFFERENCE FOR YOURSELF — YAESU'S BABY GIANTS OUTPERFORM ALL THE OTHERS! SMALL — PERFECTLY FORMED — OUTSTANDING PERFORMANCE — A NICE LITTLE HANDFUL! THAT'S YAESU — THAT'S THE FT23 AND HIS 70CMs BROTHER FT73.

YAESU AND S.M.C. TOGETHER COMBINE TO BRING YOU THE LATEST FAMILY — TECHNOLOGY AND KNOWHOW FROM YAESU — EXPERT SALES ADVICE AND 1ST CLASS SERVICE BACK-UP FROM S.M.C.

PLUS OUR

**FREE FINANCE FREE DELIVERY FREE 2 YEAR GUARANTEE.\***

UNBEATABLE FT23 ON 2 METRES AND FT73 ON 70CMs

**NO PRICES GIVEN —**

**PRICE? TELEPHONE TODAY FOR OUR  
BEST PRICE — IN STOCK NOW!**

**SMC - YAESU - SMC - YAESU**

**INCREDIBLE!**

**THAT'S THE ONLY WORD FOR THE  
YAESU FT727R**

**FT727R**

**YAESU HAS COMBINED 2M AND 70CMs IN ONE  
NEAT MULTI-FUNCTION PACKAGE**

**LOOK AT THESE FEATURES!**

- ★ 5 WATTS O/P ON 2M AND 70CM (WITH FNB4A BATTERY)
- ★ ALL FUNCTIONS DISPLAYED ON L.C.D. — SEE AT A GLANCE WHICH FUNCTIONS ARE IN USE
- ★ CAT I/P AND O/P SOCKET GIVES S METER READ OUT AND ACCEPTS INPUT FROM COMPUTER FOR EXTERNAL CONTROL
- ★ CROSS BAND SEMI-DUPLEX OPERATION
- ★ 10 STANDARD MEMORIES
- ★ PROGRAMMABLE MEMORY SCAN PLUS 12.5KHZ OR 25KHZ STEP SELECTION ON VHF AND UHF
- ★ ALL THIS IN A HAND SIZE PACKAGE 71×201×38mm (WITH FNB4A BATTERY)

**NO PRICES GIVEN —**

**PRICE? TELEPHONE TODAY FOR OUR  
BEST PRICE — IN STOCK NOW!**

**SMC - YAESU - SMC - YAESU**





# Communications Ltd.

RD IND. EST., EASTLEIGH, HANTS. SO5 3BY

77351SMCOMM G

FAX: 0703 263507



## VERSATOWERS

SMC now have available ex-stock the new economical 40' Versatower especially designed for the radio amateur at a remarkable price of only £440 + carriage.

**Versatowers** - simply the best value, fully galvanised, easy to install and raise/lower, largest range 25-120ft; example:

Fixed Base 25'	£230.00
Post Mount 30'	£482.50
Post Mount 40'	£536.50
Post Mount 60'	£652.00

Save money on a complete system - phone/write for details

**NEW**

Once again SMC has searched the world for the best Rotators and have found the  
**KENPRO KR 800SDX and KR 1000SDX**

Two super new rotators with outstanding performance and specifications

Look at these features

- ★ Fully automatic rotor speed reduction before braking to reduce stress on braking components
- ★ Full 450 degree rotation - cover those countries you couldn't reach before
- ★ Faster rotation speed possible for the smaller antennas
- ★ Full slow speed control possible for the larger antennas giving precise adjustment
- ★ Full and precise adjustment of the reference needle and compass graticule possible manually



## KR 800 SDX

SMC - WE ONLY STOCK THE BEST

**ROTORS - FREE DELIVERY UK MAINLAND**

AR200X Offset	£59.95
KR250 Small Bell	£78.00
KR400 Popular Bell	£139.00
KR400RC D/L Bell	£169.00
KR600RC H/D Bell	£219.00
AR40 CDE Bell	£125.00
CD45 H/D Bell	£219.00
KR2000 H/D Bell	£445.00
KR2000RC H/D Bell	£445.00
T2X (T/Twister)	£449.00
KR500 Elevation	£149.95
KR5400 AZ + Elev	£279.00
KR5600 H/D AZ + Elev	£369.00
KR5600A Comput Cont AZ + Elev	£339.00
KR5400A H/D Comput Cont AZ + Elev	£389.00
KR010 Comput Int/Face	£275.00

**FREE DELIVERY UK MAINLAND ALL ROTATORS IN STOCK NOW**

## COAX CONNECTORS

### UHF COAX PLUGS

PL259M UHF67 7/16"	£0.71
PL259M UHF67 7/16" F4	£1.00
PL259A De Luxe UHF67 10MM	£1.49
PL259B De Luxe UHF67 7/16" NMM	£2.77
PL259C 1" NMM	£1.33
PL259H 5MM	£0.83
UG176 Reducer 5/8MM	£0.20
PL259PM PANMT 4 Hole	£1.77

### UHF COAX SOCKETS

SO259 4 Hole PANMT	£0.71
SO259N1 Nut Inner	£0.81
MS58 T. J. 1" 1M	£2.06
MS58 5/8" 1" 1M	£3.38

### N SERIES PLUGS 50R

UG175 5MM	£2.48
UG171 11MM	£2.44

### N SERIES SOCKETS 50R

UG58 4 Hole	£1.62
-------------	-------

### INTERSERIES CONNECTORS 50R

FULL RANGE AVAILABLE

### COAX RELAYS

CR120A Cable Entry	£17.75
CR140D 2 N + 2 BNC	£25.15
CR150D 2 N + 2 BNC	£23.50
CR160D 2 N + 2 BNC	£48.30
CR170D 2 N + 2 BNC	£48.30
CR180D 2 N + 2 BNC	£71.40
CR190D 2 N + 2 BNC	£71.40

### COAX SWITCHES

SMC52U 2 Way 50/259	£18.95
SMC52N 2 Way N	£23.50
CR120 2 Way 50/259	£23.50
AN2 2 Way Slide	£4.60
AN3 3 Way Slide	£5.00

Post and Packing £1.85

### COAX CABLE

LF1 250A 3/8 Heliax	£3.68
LF1 450A 1/2 Heliax	£4.43
UR43 50R 5MM Solid	£0.31
UR43 50R 5MM Stranded	£0.32
UR47 50R 10MM	£0.78
UR47 75R 1/2" Dury	£0.32
UR47 75R 1/2" Dury	£0.32
UR47 75R 1/2" Dury	£0.32
UR47 75R 1/2" Dury	£0.32

Above Prices are per Metre

Add Carriage £2.40 up to 20 METRES £3.20 over 20 METRES

### LOOK! SAVE MONEY!

100 MTR DRUMS 50R	£70.15 Carriage £4.75
UR47 100	£79.90 Carriage £2.55
UR47 100	£78.75 Carriage £2.55
100 MTR DRUMS 75R	
UR47 100	£20.70 Carriage £2.65
UR47 100	£29.90 Carriage £2.55
UR47 100	£52.90 Carriage £3.90
UR47 100	£67.85 Carriage £4.75

## TELOMASTS

TELESCOPIC 10ft SECTIONS - GUYED

IDEAL FOR AMATEUR USE WHERE LATTICE TOWERS ARE NOT SUITABLE

TMM40 40ft	£69.57 car £6.00
TMM50 50ft	£86.02 car £8.00
RIGGING KITS FOR ABOVE	
TMR40 40ft Kit	£64.80 car £5.00
TMR50 50ft Kit	£83.31 car £8.00

Additional Accessories Available - Please Phone for Details.

## BOOKS - BOOKS - BOOKS - BOOKS - BOOKS

### SMC LIBRARY - By far the best selection in Britain


1 Comp VHF/UHF Freq Guide	£5.25
2 HF Ants for all Locations	£6.10
3 Test Eq for Radio Amateurs	£6.00
4 Amateur Radio Software	£9.50
5 Guide to Amateur Radio	£3.50
6 Q & A Ref Manual	£6.80
7 Amateur Radio (Stokes & Bubb)	£10.25
8 Radio Date Ref Book	£9.50
9 Radio Am Exam Manual (11th Ed)	£3.75
10 Am Radio Oper Manual	£6.00
11 Satellite Exper H Book	£12.73
12 Morse Code for Radio Ams	£2.25
13 TV Interference Manual	£2.00
14 Out Of Thin Air (PW Pubs)	£2.00
15 Are The Voltages Correct (PW)	£2.00
16 VHF/UHF Manual	£10.50
17 VHF/UHF Airband List (2nd Ed)	£5.25
18 How to Pass the R A E	£3.40
19 World Press RTTY Freq	£7.20
20 Passport to AM Radio (PW)	£2.25
21 Wires & Waves (PW Pubs)	£3.90
22 Radio Communi H Book	£11.00
23 Introducing RTTY (PW pubs)	£1.50
24 YAESU Log Book	£2.00
25 QRA Map-Coated (Free with 0 Lay)	£1.00
26 QRA Overlay (50K rings)	£2.20
27 UK Confidential List	£5.25
28 JAYBEAM Logbook	£3.55
29 QRA Map 2 (Maidenhead)	
30 ARRL Handbook 1987 Edition	£1Tel

All above prices include Post & Packing

## SUPER AR 200XL AUTOMATIC ANTENNA ROTATOR

- ★ NEW AUTOMATIC ANTENNA ROTATOR
- ★ BUDGET PRICE SYSTEM
- ★ SAFE 18V A.C. OPERATING VOLTAGE
- ★ FULL 360° ROTATION
- ★ LIGHTWEIGHT - ONLY 4KG
- ★ OPTIONAL SUPPORT BEARING FOR HEAVY LOAD APPLICATIONS
- ★ IN STOCK NOW

**SPECIAL PRICE £59.95**



## JAYBEAM UK'S LARGEST STOCK

THIS MONTH'S BARGAINS - SAVE POUNDS

TB3 Mk3. 3 ele beam	£299.00
TB2 Mk3. 2 ele beam	£202.40
TB1 Mk3. rot dipole	£101.20
CK1-2 conv. kit TB1-2ss	£125.35
CK1-3 conv. kit TB1-3ss	£202.40
CK2-3 conv. kit TB2-3ss	£106.95
UGP/2m ground plane	£15.41
C5 2m Mk2 4.8dBd omni	£89.70
LR1 2m vert. 4.3dBd	£35.70
LR2 2m vert. omni	£28.18
LW5 2m 5 ele 7.8dBd	£17.30
LW8 2m 8 ele 9.5dBd	£21.85
LW10 2m 10 ele 10.5dBd	£28.23
LW16 2m 16 ele 13.4dBd	£42.43
PBM10/2 parabm 11.7dBd	£55.20
PMM14/2 parabm 13.7dBd	£68.08
Q4 2m qd 4 ele 9.4dBd	£35.30
Q6 2m qd 6 ele 10.9dBd	£46.28
Q8 2m qd 8 ele 11.9dBd	£57.80
D5 2m 5 over 5 10dBd	£30.82
D8 2m 8 over 8 11.1dBd	£42.38
5XY/2m 5 ele crossed	£33.40
8XY/2m 8 ele crossed	£43.00
10XY/2m 10 ele crossed	£53.94
10XY/137 Sat Xd yagi	£57.40
2XY/137C. h'ness 137	£35.88
6Y/2M/12Y/70cms d band	£49.45
C8/70 Mk2 G-fib omni	£95.68
D8/70 8 over 8 12.3dBd	£31.51
PBM18/70 parabm 13.1	£38.52
PBM24/70 parabm 15dBd	£51.40
LW24/70 24 ele 14.8dBd	£33.35
MBM28/70 multi 11.5dBd	£25.70
MBM48/70 multi 14dBd	£42.44
MBM88/70 multi 16.3dBd	£57.96
8XY/70 crossed 10dBd	£50.14
12XY/70 crossed 12dBd	£61.64
CR2/23cm cmr refl	£43.70

**DELIVERY FREE - UK MAINLAND ALL IN STOCK NOW!**

## SMC PX BAR SPECIAL PRICES - 3 MONTHS GUARANTEE BARGAINS - BARGAINS

	INC VAT		INC VAT
FT08E S.S. 100W HF	£1595.00	YC-1000B N.O.D.A. Logger	£399.00
FT980 S.S. HF Base 100W	£1399.00	FV9010M S.H. External 2nd VFO	£119.00
T9300 S.H. HF Base	£1195.00	FTV901R N.O.D.A. Speaker	£225.00
FT757GX S.H. HF Trans. Gen Cov	£845.00	SP901 S.S. 5W PSU 12V	£99.50
FT77 S.H. HF Transceiver 100W	£379.00	FP700 S.S. PSU 12V 20 Amp	£159.00
Discall S.S. 40 CH 10 Mtr Mobile	£35.00	S.S. PSU 12V 25 Amp	£159.00
Discall S.S. (CB) 40 CH CB	£45.00	BN55 12 12 S.H. 2Mtrs. 12V 12 Amp	£99.00
FT757GX S.H. HF Transceiver 100W	£110.00	FTV901R S.H. 2Mtrs. 12V 12 Amp	£149.00
FT726R S.S. Inc 2.6 Mtrs 70cm	£745.00	LPM144-10-180 S.S. 150W 10W/180W	£249.00
IC490E S.S. 70cm Multi 10W	£557.00	MML144-200S S.S. 1.25W in - 200W out	£334.65
FT290R S.S. (As new) 2 Mtr Multi	£329.00	FS800 S.S. 10W in - 50W out	£385.00
FT290R S.S. 2 Mtr Multi	£249.00	FS800 S.S. HF Dummy Load	£29.00
KDK FM-240 S.S. 2 Mtr 25W Mobile	£289.00	S.S. Meter 50-150MHz	£44.99
FT290R S.S. 2 Mtr 10W Multi	£310.00	S.S. Meter 3.5-150MHz	£34.95
FT290R S.S. 2 Mtr 10W Multi	£349.00	MU 168 S.S. Desk mic. Yaesu	£65.00
MM1144 2BR S.S. 25W Transceiver	£184.00	IMS 500KE S.S. 40m. 1U VDU	£159.00
FT270R S.S. 45W 2 Mtr Mobile	£359.00	SMC Decca A.S. Scope monitor	£85.00
TW 4000A S.H.D. band 2 Mtr 70cm	£325.00	FTV90 S.H. 2 Mtrs 10 watt	£129.00
TV144 S.H. 2 Mtr module	£135.00	Transverter S.S. Super 6 Single	£125.00
FT290R S.S. 2 Mtr H Port 3W	£249.00	SC-1 S.H. Station Consul PSU	£49.00
FT290R S.S. 2 Mtr H Port 3W	£269.00	FTV107/2 S.S. 2 Mtrs 10 watt	£179.00
FT290R S.S. 2 Mtr H Port 3W	£199.00	FTV107 2/0 S.H. 2 Mtrs and 70cm 10 watt	£359.00
FT290R S.S. 2 Mtr H Port 3W	£269.00	Setone S.S. FT90E Extender	£45.00
FT290R S.S. 2 Mtr H Port 3W	£269.00	HAL ST-5000 S.S. RTTY TU (SL 5 type)	£95.00
TH 41E S.H. 100m Port Multi	£339.00	ICS AM1.1 S.H. RTTY TU (SL 5 type)	£165.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	Glab Bag W.B.C.S. WARE	£7.95
FT290R S.S. 2 Mtr 45W Mobile	£339.00	Yaesu Shift New T. shirt	£2.50
FT290R S.S. 2 Mtr 45W Mobile	£339.00	Mutec TVF50 N.O.D. Mtr Transverter	£249.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	SP4 N.O.D. Speech	£39.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	UIM 211 N.O.D. Base Mtr Test	£24.95
FT290R S.S. 2 Mtr 45W Mobile	£339.00	YB044 N.O.D. Base Mtr Test	£24.95
FT290R S.S. 2 Mtr 45W Mobile	£339.00	MK 275I N.O.D. Mtr 1M VOX	£49.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	YK901 N.O.D. Keyboard	£89.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	VHF1 S.H. Discone ANT	£15.00
FT290R S.S. 2 Mtr 45W Mobile	£339.00	Various Morse Keys, shop sold, approx 25% off	POA
FT290R S.S. 2 Mtr 45W Mobile	£339.00	Key S.S. Shop sold, 12 months warranty, ex dem	POA
FT290R S.S. 2 Mtr 45W Mobile	£339.00	S.H. Secordhand, 3 months warranty	POA
FT290R S.S. 2 Mtr 45W Mobile	£339.00	AS As seen, nil warranty N.O. New Obsolete	POA

Prices subject to change

HIRE PURCHASE  
DETAILS ON  
REQUEST

FREE FINANCE \*

FREE DELIVERY \*

FREE SMC  
2 YR GUARANTEE  
ON FULL PRICED  
YAESU ITEMS

NEW INTERLINK  
SERVICE

LARGEST YAESU  
STOCK IN U.K.

NEW SHOWROOM  
FACILITIES

YAESU BACKED  
SERVICE

## INTERLINK

\* Free delivery on Yaesu Products

\* Free Finance available on Yaesu regularly priced items. Check with sales dept for details

# Free Finance!



**SITUATED AT SOUTHERN END OF M23 — EASY ACCESS TO M25 AND SOUTH LONDON**

HF RECEIVERS		£	(c&p)
Icom	ICR71	825.00	(—)
Trio	R2000	637.00	(—)
Trio	VC10 V.H.F. Converter	170.76	(2.00)
Yaesu	FRG8800	639.00	(—)
Yaesu	FRV8800 V.H.F. Converter	100.00	(2.00)

HF TRANSCEIVERS		£	(c&p)
Trio	TS940S	1995.00	(—)
Trio	TS930S	1750.00	(—)
Trio	TS440S	1195.00	(—)
Trio	TS430S	995.00	(—)
Trio	TS830S	1095.00	(—)
Trio	TS530SP	895.00	(—)
Yaesu	FT980	1750.00	(—)
Yaesu	FT757GX	969.00	(—)
Yaesu	FT767GX	1550.00	(—)
Icom	IC735	949.00	(—)

V.H.F. SCANNING RECEIVERS		£	(c&p)
Icom	ICR7000	957.00	(—)
Yaesu	FRG9600	525.00	(—)
A.O.R.	AR2002	487.30	(—)
Signal	R532 "Airband"	224.00	(—)

V.H.F. SCANNER ACCESSORIES		£	(c&p)
A.K.D.	HFC1 HF Converter	49.00	(1.00)
Revcone	Disccone Antenna 30-500MHz	31.50	(2.00)
Icom	AH7000 Antenna 25-1300MHz	82.00	(3.00)

ANTENNA TUNER UNITS		£	(c&p)
Yaesu	FRT7700 Short wave listening	59.00	(2.00)
Yaesu	FC757AT	349.00	(—)
Trio	AT230	220.00	(2.50)
Trio	AT250 auto	385.00	(—)
Daikwa	CNW518 High power	258.00	(—)

2.M. TRANSCEIVERS		£	(c&p)
Trio	TH21E Handheld	228.00	(—)
Trio	TR2600E Handheld	199.00	(—)
Trio	TM201A 25w F.M. mobile	358.00	(—)
Trio	TR751E 25w multimode	649.00	(—)
Trio	TS711E base station	991.00	(—)
Yaesu	FT290II Portable multimode	429.00	(—)
Yaesu	FT203R + FNB3 Handheld	255.00	(—)
Yaesu	FT209RH + FNB3 Handheld	309.00	(—)
Yaesu	FT270RH 45w F.M. mobile	469.00	(—)
Yaesu	FT276R base station (70cm optional)	999.00	(—)
Icom	IC2E Handheld	225.00	(—)
Icom	IC02E Handheld	299.00	(—)
Icom	IC27E 25w mobile	399.00	(—)
Icom	IC271E base station	835.00	(—)
Icom	IC3200E 2M/70cm F.M. mobile	556.00	(—)

70cm TRANSCEIVERS		£	(c&p)
Trio	TH41E Handheld	268.00	(—)
Trio	TR3600E Handheld	353.00	(—)
Trio	TS811E base station	1095.00	(—)
Yaesu	FT703R + FNB3 Handheld	289.00	(—)
Yaesu	FT709R + FNB3 Handheld	319.00	(—)
Yaesu	70cm module for FT726R	349.00	(—)
Icom	IC4E Handheld	285.00	(—)
Icom	IC04E Handheld	299.00	(—)
Icom	IC471E base station	927.00	(—)

OTHER BANDS		£	(c&p)
Yaesu	FT690R 6M portable	399.00	(—)
Yaesu	6M module for FT726R	249.00	(—)
Yaesu	21/24/28 H.F. module for FT726R	269.00	(—)
Icom	IC1271E 1.2 GHz	1140.00	(—)

STATION ACCESSORIES		£	(c&p)
Drac	V.H.F. wavemeter	27.50	(1.50)
A.K.D.	V.H.F. wavemeter	24.95	(1.50)
Yaesu	FF501DX low pass filter 30MHz 1kW	37.50	(2.00)
Trio	LF30A low pass filter 30MHz 1kW	34.00	(2.00)
Adonis	AM303G desk mic with pre-amp	53.00	(2.00)
Adonis	AM503G desk mic with compression	69.00	(2.00)
S.M.C.	Polar-phaser II 2 metre	49.00	(2.50)
S.M.C.	Polar-phaser II 70 cms	69.00	(2.50)

ANTENNA SWITCHES		£	(c&p)
Welz	CH20N 1300MHz N skts.	49.00	(1.50)
Welz	CH20A 900MHz SO239 skts.	29.95	(1.50)
SA 450N	2way diecast 500MHz N skts.	23.75	(1.00)
SA 450	as above but SO239 skts.	17.50	(1.00)
Drac	3way N skts.	19.90	(1.00)
Drac	3way SO239 skts.	15.40	(1.00)
CS 4	4way B.N.C. skts. 1500MHz	30.39	(2.00)

ANTENNA BITS		£	(c&p)
Hi-Q	Balun 1:1 5kW P.E.P.	11.95	(1.00)
Bricomm	Balun 4:1 1kW	11.20	(1.00)
Bricomm	7.1MHz Epoxy Traps (pair)	9.95	(1.50)
	Self Amalgamating Tape 10Mx25mm	3.95	(0.75)
	T-piece polyprop Dipole centre	1.60	(0.25)
	Small ceramic egg insulators	0.60	(0.20)
	Large ceramic egg insulators	0.85	(0.20)

CABLES ETC.		£	(c&p)
URM67	low loss coax 50 ohm	per metre	0.75 (0.25)
UR76	50 ohm coax dia. 5mm	per metre	0.30 (0.10)
UR70	70 ohm coax	per metre	0.35 (0.10)
UR95	50 ohm coax dia. 2.3mm	per metre	0.40 (0.10)
4mm	Polyester Guy Rope (400kg)	per metre	0.20 (0.10)
50mtrs.	16 swg hard drawn copper wire	6.95	(1.50)

GOODS NORMALLY DESPATCHED WITHIN 24 HRS  
— PRICES CORRECT AT TIME OF GOING TO PRESS  
— E&OE



MAIL ORDER  
AND RETAIL

**BREDHURST ELECTRONICS LTD HIGH ST, HANDCROSS, W. SX. RH17 6BW (0444) 400786**

## South Midlands Communications Ltd.

IS PLEASED TO ANNOUNCE THE APPOINTMENT OF  
**G4JA LINCOLNSHIRE COMMUNICATIONS**  
(DAVID STENNING)  
AS OUR AGENT IN LINCOLNSHIRE.

FOR ALL YOUR AMATEUR RADIO EQUIPMENT  
CHOOSE **YAESU** BY **SMC** FROM  
**G4JA LINCOLNSHIRE COMMUNICATIONS**  
'LAKEWOOD', TATHWELL, LOUTH, LINGS, LN11 9SR  
TEL: 0507 604967

Contact us for all these products:

YAESU — HY-GAIN — JAYBEAM — GWHIP — SMC  
ANTENNAS (MOBILE AND BASE) — JVL — DIAMOND  
D130 DISCONE — M.E.T. — VERSATOWER — HANSEN —  
SMC CONNECTORS (we have largest stocks in UK) —  
WELZ — ICOM — AOR — JIL-REGENCY — BNOS — SHURE —  
MICROWAVE MODULES — KENPRO ROTATORS —  
ICS PRODUCTS

**THE LARGEST AMATEUR RADIO WAREHOUSE  
IN THE UK IS AT YOUR FINGERTIPS**



The Communicators

## South Midlands Communications Ltd.

S.M. HOUSE, SCHOOL CLOSE,  
CHANDLERS FORD INDUSTRIAL ESTATE,  
EASTLEIGH, HAMPSHIRE SO5 3BY.  
TEL: 0703 255111 TLX: 477351 SMCMM G  
FAX 0703 263507



## SPECTRUM COMMUNICATIONS

MANUFACTURERS OF RADIO EQUIPMENT AND KITS

### NEW PRODUCT

**FOUNDATION TRANSMITTER**, ideal for the newly licensed amateur. 2 metre FM, crystal controlled unit with 6 crystal positions, nominal output 750mW. Complete system comprises RF generator board FTX201 with S20 crystal, £31, Frequency modulator board FM1000T £4.00, and Transmit Switching board TS25, £3.75.

**CB TO 10 FM CONVERSION BOARDS — THE FIRST COMMERCIALY AVAILABLE**, suits all UK FM CB rigs to give 29.31 to 29.70MHz. Size only 63x40x13mm. Built and aligned board SC29 £15. Or send your rig and we'll fit it. £28 inc. return P&P for mobiles. £31 inc. for base rigs.

**MULTIMODE CB CONVERSIONS**, send your 120 channel rig and we'll convert it to give 28.01 to 29.70MHz in straight sequences without gaps. Colt 1200DX, Cobra 148. Hy Gain 5. Multimode 2. Major M360, Tristar 747 & 777, Super Star 360, Concorde, etc., £62 inc. return P&P. Jumbo or Colt Excaltur 1200, £65. 80 Channel rigs such as Stalker 9 or Major M588 are modified to give 28.31 to 29.70MHz in straight sequence without gaps. £45.00 inc. return P&P. 200 Channel in 4 bands of 50 are converted to give 28.00 to 30.00MHz or 28.00 to 29.70MHz as required. Super Hy Gain 5, Lafayette 1800, Super Star 2000, £45.50 inc. return P&P. Nato 2000 £52.50, Super Star 2000-5x40CH £70. Colt 1600, 4x40CH, £65.50.

**FREQUENCY MODEM** adds FM to synthesized rigs with 455KHz IF. Type FM 455, PCB kit £6.50, PCB built £9.50.

**FREQUENCY DEMODULATOR** adds FM to receivers with 455KHz IF, suits R600, R1000, FRG7000. Type FD455, PCB kit £5.50, PCB built £7.50.

**FREQUENCY MODULATOR** adds FM to synthesized rigs or rigs with clarifier, Type FM1000, PCB kit £3.00, PCB built £4.00.

**RECEIVE CONVERTERS** 2, 4 or 6 Metre aerial input with 10 metre IF or 4, 6, 10 or 20 metre aerial input with 2 metre IF, 26dB gain, low noise with OSC output. Types RC2-10, RC4-10, RC6-10, RC4-2, RC6-2, RC10-2, RC20-2. PCB kit £17.25, PCB built and tested £24.50, Boxed kit £29.25, Boxed built and tested £41.00.

**TRANSCIVE CONVERTER**, single board version of receive & transmit converters, 500mW output, with repeater shift facility. Types TRC2-10, TRC4-10, TRC6-10, PCB kit £39, PCB built and tested £54, Boxed kit £54, Boxed built and tested £83.25.

**TRANSMIT AMPLIFIER**, unswitched, suitable for Transmit Converters, Transceiver Converters and MEON, 500mW in, 20W min output. Types TA2U2, TA4U2, TA6U2 PCB kit £40.50, PCB built & tested £48.75, Boxed kit £45.00, boxed, built and tested £53.00.

**RECEIVE PREAMPS** 2, 4, 6 or 10 metre. RF & DC switched, 0-20dB variable gain, low noise, 100W handling. Types RP2S, RP4S, RP6S, RP10S. Also masthead version DC coax fed, types RP2SM, RP4SM, RP6SM, PCB kit £12, PCB built and tested £16.75, Boxed kit £20.25, Boxed built and tested £27.00.

**NOISE SQUELCH** squelches rig when noise is high. Allows reception between noise bursts. Type NS1000, PCB kit £7.25, PCB built £10.25.

VAT & P&P INC PRICES

Delivery within 14 days subject to availability. 24 hr answering.



UNIT B6, MARABOUT INDUSTRIAL ESTATE,  
DORCHESTER, DORSET. TEL: 0305 62250





# DEWSBURY




# ELECTRONICS



TS930 WITH FM £1750



TS830S WITH FM £1095

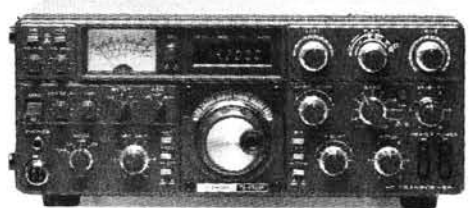

TS530SP WITH FM £895

APPROVED  
**TRIO**  
DEALER



TS4305 WITH FM £995

APPROVED  
**TRIO**  
DEALER

**NEW**

**TRIO R5000**

**£895<sup>00</sup>**

INC. VAT &  
CARRIAGE

**DEWSBURY ELECTRONICS** the first and last name in FM for HF amateur radio, offer FM for the TRIO TS930S, TS430S, TS830S, & TS530SP at no extra cost when your new transceiver is purchased through us. All Transceivers carriage paid to UK mainland. DEWSBURY ELECTRONICS can also offer the FM conversions for you to fit to your transceiver, or will happily fit it for you, for a modest charge. Please send SAE for full details. ALSO FITS FT101Z series.

**REPAIRS REPAIRS REPAIRS** DEWSBURY ELECTRONICS are delighted to be able to extend their renowned repair service to all, whether or not the equipment was sold by us or by others. Modest charges, guaranteed repairs. Equipment collected and delivered anywhere in the UK and fully insured. Please write or phone before dispatching equipment.

**MORSE = MORSE + MORSE + MORSE + MORSE + MORSE + MORSE**

In addition to the two Star Masterkeys, DEWSBURY ELECTRONICS are now able to supply the Range of Vibroplex Keys. S.A.E. for illustrated list and prices. Special deals for Star Masterkey and Vibroplex.



*"The Oldest Name In Amateur Radio"*

Stockists of: DAIWA = DATONG = ICS = AEA = BENCHER = VIBROPLEX = POCOM = MET ANTENNAE  
MICROWAVE MODULES = BNOS = TELEREADER = JRC = ICOM = YAESU

**Dewsbury Electronics, 176 Lower High Street, Stourbridge, West Midlands.**

**Telephone: Stourbridge (0384) 390063/371228**

**Telex: 337675 TELPES G**


Instant finance available subject to status. Written details on request.



# C.M.HOWES COMMUNICATIONS

139, Highview, Vigo,  
Meopham, Kent,  
DA13 0UT England.  
Fairseat(0732)823129

## FANFARE FOR NEW GOODIES!

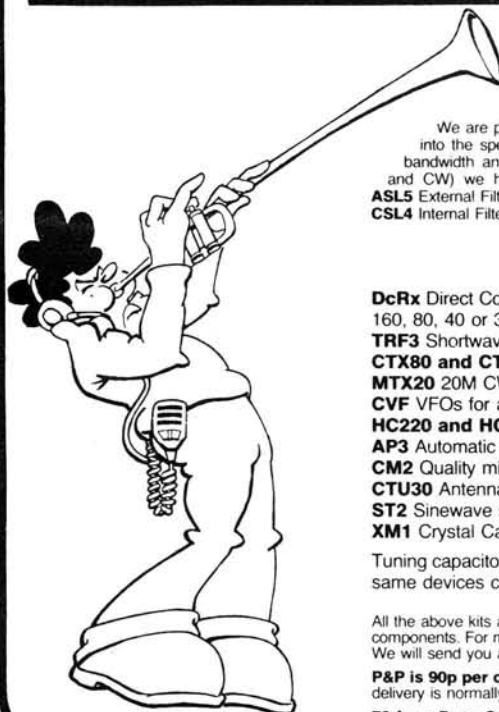

We are pleased to announce two new dual bandwidth filters to enable you to enhance your receiver. The **ASL5** simply plugs into the speaker or headphone socket of your radio, while the **CSL4** fits within the set, (ie DcRx). Both feature a 300Hz CW bandwidth and fast roll-off for sharp selectivity on speech modes. These filters give improvements with every radio (FM, SSB and CW) we have tested to date. So you can have some fun with a constructional project, and upgrade your station too!

**ASL5** External Filter kit: £14.90  
**CSL4** Internal Filter kit: £9.90

**Assembled PCB module: £22.50**  
**Assembled PCB module: £15.90**

**DcRx** Direct Conversion Receiver for CW and SSB reception, versions available for 160, 80, 40 or 30/20 Meters)  
**TRF3** Shortwave Broadcast receiver using TRF principle  
**CTX80 and CTX40** QRP CW Transmitter for 80M and 40M bands  
**MTX20** 20M CW Transmitter, adjustable power up to 10W RF  
**CVF** VFOs for above TXs (one version per band)  
**HC220 and HC280** 2M to 20M or 80M transverters, 10W RF  
**AP3** Automatic Speech Processor with VOGAD level control  
**CM2** Quality microphone kit with electret mic and VOGAD  
**CTU30** Antenna Tuner, with balun, all HF bands up to 30W  
**ST2** Sinewave side-tone/practice oscillator 1W audio.  
**XM1** Crystal Calibrator, 8 o/p markers, usable LF to UHF

Kit	Assembled PCB
£15.30	£20.90
£14.50	£19.90
£13.40	£19.40
£21.90	£27.70
£9.90	£15.90
£52.50	£83.50
£15.90	£22.80
£11.20	£15.20
£24.90	£29.90
£8.60	£12.90
£16.80	£21.90

Tuning capacitors for the DcRx receiver (except 160M version) are £1.50 each, you need two per receiver. One of the same devices can also be used for the CVF.

All the above kits are to build PCB modules. They include a circuit board, full instructions and all board mounted components. For more information on the above, or the rest of our range, simply drop us a line enclosing an SAE. We will send you a copy of our catalogue, and an information sheet on any kit you are particularly interested in.

**P&P is 90p per order.** Export prices are as above, but add £2.00 per kit for airmail delivery outside Europe. UK delivery is normally within 7 days.

73 from Dave G4KQH, Technical Manager.



## EASY TO BUILD KITS BY MAIL ORDER

### J. BIRKETT

RADIO COMPONENT SUPPLIERS

600 PIV 25 AMP THYRISTORS (SCR'S) (a £1.50.  
30 AMP STUD MOUNTING DIODES 100 Piv (a 50p, 400 Piv (a 60p, 400 Piv 15 Amp Thyristors (SCR'S) (a 60p each.  
1N4007 WIRE ENDED DIODES 1000 Piv 1 Amp (a 6 for 50p.  
BRIDGES 100 Piv 10 Amp (a 65p, 100 Piv 20 Amp (a £1.30.  
EURO CARD I.C. BOARD 6" x 3 1/4" 1 Holes with 10, 10 Pin Stackable I.C. DIL Sockets (a £1.30.  
MINIATURE WIRE ENDED RF CHOKES in UH 0.18, 0.47, 0.62, 0.56, 0.91, 1.5, 1.6, 1.8, 2.7, 3.6, 5.6, 39, 62, 82, 91, 150, 200uH All (a 10p each.  
LOW PASS FILTERS 10.7MHz (a 3 for £1.  
VERNITRON 10.7MHz CERAMIC FILTERS (a 6 for £1.  
TRANSMIT-RECEIVE SWITCHING PIN DIODES VHF 5 for 60p, UHF 5 for 75p.  
BFW16A LOW POWER VHF TRANSISTOR (a 75p.  
MULLARD FERRITE RING FX1594 (a 20p, MULLARD TWO HOLE FERRITE BLOCK FX2049 (a 20p, SIEMANS TWO HOLE FERRITE BLOCK (a 20p.  
MAINS TRANSFORMERS 240 Volt Input. Type 1 24 Volt Tapped At 14 Volt 1 Amp (a £1.50 (P.P. 75p), Type 2 6 Volt 5 Amp (a £2.50 (P.P. 75p), Type 3 12 Volt 1 Amp Twice (a £2.50 (P.P. 75p), Type 4 18 Volt 3 Amp (a £2.50 (P.P. £1).  
X BAND GUNN DIODE (a £1.65, X BAND SCHOTTKY DETECTOR Diode Like 1N23 (a 40p.  
X BAND TUNING VARIATORS 2p1 or 4p1. Both (a £1.65 each.  
FETS J304 (a 6 for £1, J230 (a 5 for 60p, BF256 (a 20p, 2N3819 (a 20p.  
RF POWER TRANSISTORS BLY55 (a £2.50, BLY97 (a £3., BFR64 (a £4.  
STRIPLINE 2GHz TRANSISTORS NPN (a 3 for £1.15.

WOOD AND DOUGLAS KITS AVAILABLE BY POST AND FOR CALLERS. ACCESS AND BARCLAY CARDS ACCEPTED. P.P. 60p UNDER £5, OVER FREE.

25 The Strait  
Lincoln, Tel. 20767  
(LN2 1JF)  
Partners J.H.Birkett.  
J.L.Birkett.



### WORLD RADIO TV HANDBOOK 1987 ★ 1987 EDITION NOW IN STOCK ★

Recognized as one of the most comprehensive, up-to-date publications on the world's long, medium and shortwave radio and TV stations, the 1987 edition of WRTV is completely revised for easier and quicker access. In minutes you can identify transmitting stations in each country, including frequencies, power, call signs, and locations. Whether you want to stay current with political events in Africa, cultural happenings in Europe, or music anywhere on earth, WRTV saves you hours of searching and gives you more time to listening. And to improve the quality of listening there is a careful survey of leading brand receivers.

Price £17.95 post & packing FREE

#### GUIDE TO UTILITY STATIONS 1987

Now lists 14,817 SW frequencies Aero, CW, Fixed, Commercial, RTTY, FAX, etc. stations, plus call signs and much more. The most comprehensive frequency book available. £19.95 + £1.65 p&p.

SCANNERS A VHF/UHF Listener's Guide with frequency lists. £7.95 p&p FREE.

A TV-DXers Handbook New edition of the leading book on the subject. £5.95 p&p FREE.

MARITIME RADIO HANDBOOK Tune into the world's shipping. Lists 100's of frequencies. £12.50 + 65p p&p.

COMMUNICATION SATELLITES Comprehensive and detailed book on all the satellite stations that can be received. £13.25 + £1.65 p&p.

Two or more books Post & Packing FREE (UK and Eire only).

Ask for our new 1987 free catalogue of all books.

Delivery normally from stock within 14 days.

INTERBOOKS

PWD21, Stanley, Perth PH1 4QQ.

Tel: (0738) 828575



## now, better than ever, the NEW TRIO TR751E

## 2 metre multimode!

£580.70 inc. VAT, Carriage £7.00



LOWE ELECTRONICS LIMITED Chesterfield Road, Matlock, Derbyshire DE4 5LE Telephone 0629 2817, 2430, 4057, 4995



THE LONDON AMATEUR EMPORIUM  
FOR EVERYTHING RADIO

191 FRANCIS ROAD  
LEYTON · E10 6NQ · LONDON  
TELEX 8953609 LEXTON G

PHONE  
01-558 0854  
01-556 1415

dressler  
FOR ICOM

OPEN MON -  
SAT 9AM - 5.30PM  
INTEREST FREE  
HP FACILITIES AVAILABLE  
ON MANY ITEMS  
PROMPT MAIL ORDER



dressler  
FOR YAESU

IC28E/IC48E

VERY LATEST MINI-MOBILE  
25/45 watts. RX 138-174MHz  
£££ unbelievable value.

ICOM R7000 25MHZ-2000MHZ  
SPECIAL OFFER!!



FREE  
ARA 500.  
ACTIVE ANTENNA  
WORTH £139.00  
£957

NEW

£425 - YAESU FT 290 MKII  
A NEW  
VERSION  
OF THIS  
POPULAR  
PORTABLE  
INC. NICAD  
& CHARGER



ICOM MICRO 2  
HANDHELD

ICOM IC-02E

ALSO  
AVAILABLE  
IC275E

ALL SONY UK SUPPLIED



£POA



£275



£854  
SPECIAL OFFER

SONY AIR 7

PORTABLE-AM-FM

144-174MHz  
108-136MHz  
150KHz-2194KHz

£249



DUAL BAND  
FT273  
£P.O.A.

FT23/  
FT73  
£P.O.A.



BUY A  
R71 FOR £825  
& RECEIVE AN ARA 30  
FREE  
WORTH £129

WIDE RANGE OF YAESU/ICOM,  
TRIO/KENWOOD, H.F., V.H.F., U.H.F.  
SCANNING RECEIVERS AND  
TRANSCIVERS IN STOCK ICOM ICA2 ALL  
CHANNELS TX/RX 5 WATTS, 108-135 AND  
175 MHz £450 - COMMERCIAL,  
PROFESSIONAL, MARINE, CELLULAR  
AND AMATEUR RADIO SALES AND  
SERVICE.

SONY ICF 200ID

76-108 MHz  
116-136 AIRBAND  
160KHz-2995MHz  
FM - AM - SSB 32 MEMORIES  
INC PSU

£325



SONY ICF 7600D

76-108MHz  
162kHz-2995MHz  
MEMORIES: FM, AM, S.



FRG 8800 £575



NEW

FT767 YAESU



FULL HF GENERAL  
COVERAGE TRANSCEIVER

£1395

FRG 9600 £475



## ACTIVE ANTENNAS

dressler - ara 30  
active antenn

200 kHz . . . 40 MHz

Professional electronic circuitry with very wide  
dynamic range. Meets professional demands  
both in electronics and mechanical ruggedness.  
120 cm long, fibreglass rod. Circuit is built into  
waterproof, 2.5 cm thick aluminium tube. Ideal  
for commercial and civil-receiving systems. £129.  
See Review in August Issue p.15

DRESSLER  
ARA 500  
ACTIVE ANTENNA

50MHz to 1300MHz

Gain 17dB Typical

TECHNICAL SPECIFICATIONS  
FOR ARA 500

Gain 17dB Typical (14-17dB)  
Frequency Range 50-1300MHz  
Noise Figure 1dB at 50-180MHz  
1.5dB below 300MHz  
2.0dB below 350MHz  
2.7dB below 400MHz  
3.0dB below 500MHz  
3.8dB below 650MHz

£139.00

Operation is possible up to 1300MHz  
with gain of 10dB  
Noise 4-6dB  
Intercept Point 3rd Order: +18dbm at Input  
Post £3.00 or Securicor £7.00 extra

## LINEARS

SPECIAL OFFER

10 ONLY D200S £925

D200 2 MTR 500W SSB

£858

D200S 2 MTR 750W SSB SEE PANEL ABOVE

D70 70 CMS 550W SSB

£1030

CARRIAGE FREE - SECURICOR



## PRE-AMPS - NEW MODELS

MODEL	FREQ.	NOISE	GAIN	POWER	PRICE
EVV1296C	1.25-1.3GHz	0.9-1.2	16-18dB	100W	£162
EVV700SMD	430-440MHz	0.5-0.9	15-18dB	500W PEP	£124
EVV2000SMD	144-146	0.6-0.9	16-18dB	1KW PEP	£124
EVV200VOX	144-146	0.6-0.9	16-18dB	700W PEP	£112
EV2GAAS	144-146	0.6-0.9	15-18dB	100W PEP	£75

VV INTERFACE FOR ABOVE PRE-AMPS

£31

## RECEIVE PRE-AMPS

MODEL	FREQUENCY	NOISE	GAIN	PRICE
EWPA 560	50-600-1GHz		16.5dB-1dB	£79
EWPA 560(N)	50-600-1GHz		16.5dB-1dB	£89
IP3 order	+18dBm			
ERPA 1296	1.25-1.30	0.8	17-18dB	£120
ERPA 435	430-440	0.5	15-18dB	£70
ERPA 144	144-146	0.7	16-18dB	£66
ASA 12	0-1GHz		Masthead Antenna Switch	£59

## TX-3 RTTY / CW / ASCII TRANSCIVE

All the features you've ever wanted in this really top class program. Some of the facilities are: Split-screen, type-ahead, receive screen unwrap, 24 large memories, clock, review store, call sign capture, RTTY auto CR/LF, CW software filtering and much more. Uses interface or T.U. For **BBC-B** and **CBM64**. Tape £20, disc £22. For **VIC20** we have our RTTY/CW transceive program. Tape £20.

## RX-4 RTTY / CW / SSTV / AMTOR RECEIVE

This is still a best-selling program and it's easy to see why. Superb performance on 4 modes, switch modes at a keypress to catch all the action. Text and picture store with output to screen, printer and tape/disc. An essential piece of software for trawling the bands. **SPECTRUM** needs no hardware, **BBC-B**, **CBM64** and **VIC20** need interface. Tape £25, BBC or CBM64 disc £27.

**TIF1 interface** has 2-stage RTTY and CW filters for improved reception and transmit outputs for MIC, PTT and KEY. Kit £15 (assembled PCB + cables and connectors) or ready-made £25 in a box with all connections. Extra MIC leads for extra rigs £3 each.

**BBC World map and locator** shows daylight and darkness zones and realtime clock updated as program runs. Accepts input of lat/long, QTH or Maidenhead locator, NGR or one of 245 place-names. Prints distance, bearing, VHF contest score and long patch details. Plots distant station and great circle path on map. Runs on **ELECTRON** also. Tape £7, disc £9.

For **CBM64**, **VIC20**, **SPECTRUM** we have our original locator program (no map, NGR or placenames) tape £7.

**Morse Tutor** is now fully revised with every feature to learn morse the quick and easy way. Graded learning for beginners and 40 plain language texts for test preparation. Tape £6 for **BBC-B**, **ELECTRON**, **CBM64**, **VIC20**, **SPECTRUM**. The original **ZX81-16K** program is still available at £6.

**Logbook** date, band, mode, call and remarks for all your contacts. Easy to use, printout to screen or printer, callsearch. For all the above computers, tape £8.

**RAE Maths** All the practice and testing you need for the exam. For all the above computers inc. **ZX81-61k**, tape £9.

All BBC and CBM64 programs are available on disc at £2 extra. All VIC20 programs (except locator) need expansion.

Prices include VAT and p&p, 1st class inland, airmail overseas, normally by return. Eire, C.I., BFPO deduct 13%.



**technical software (P.W.)**

Fron, Upper Llandwrog, Caernarfon LL54 7RF. Tel. 0286 881886

## AUDIO FILTERS MODELS FL2, FL3, FL2/A

Model FL3 represents the ultimate in audio filters for SSB and CW. Connected in series with the loudspeaker it gives variable extra selectivity better than a whole bank of expensive crystal filters. In addition it contains an automatic notch filter which can remove a "tuner-upper" all by itself.

Model FL2 is exactly the same but without the auto-notch. Any existing or new FL2 can be up-graded to an FL3 by adding Model FL2/A conversion kit, which is a stand-alone auto-notch unit. Datong filters frequently allow continued copy when otherwise a QSO would have to be abandoned.

Prices: FL2 £89.70, FL3 £129.37, FL2/A £39.67

## ACTIVE RECEIVING ANTENNAS

Datong active antennas are ideal for modern broadband communications receiver—especially where space is limited.

- highly sensitive (comparable to full-size dipoles).
- Broadband coverage (below 200 kHz to over 30 MHz).
- needs no tuning, matching or other adjustments.
- two versions AD270 for indoor mounting or AD370 (illustrated) for outdoor use
- very compact, only 3 metres overall length. ● professional performance standards.

Prices: Model AD270 (indoor use only) £51.75 Both prices include mains power unit. Model AD370 (for outdoor use) £69.00

## MORSE TUTOR

The uniquely effective method of improving and maintaining Morse Code proficiency. Effectiveness proven by thousands of users world-wide.

- Practise anywhere, anytime at your convenience.
- Generates a random stream of perfect Morse in five character groups.
- D70's unique "DELAY" control allows you to learn each character with its correct high speed sound. Start with a long delay between each character and as you improve reduce the delay. The speed within each character always remains as set on the independent "SPEED" control.
- Features: long life battery operation, compact size, built-in loudspeaker plus personal earpiece.

Price: £56.35

Our full catalogue plus further details of any product are available free on request. All prices include VAT and postage and packing. Goods normally despatched within 3 days subject to availability.

**DATONG  
ELECTRONICS  
LIMITED**

write to dept. P.W.  
Clayton Wood Close  
West Park  
LEEDS LS16 6QE  
Tel: (0532) 744822 (2 lines)

**H. F. Rx M118.** compact aircraft Rx tunes 150/510Kc & 2/18Mc/s in 4 bands reqs 28v DC or 28 & 220v DC as BFO. Cal. Crystal Filter. uses 12 min valves, film scale tuning, tested with circ. £85 **DISH AE 32"** dia 5" deep some perforations dual new. £24.50 **PRE SEL UNITS.** HF tunable 2/29Mc/s in 4 band direct cal with s.m. dial 75 ohm in/out on 19" panel. £24.50 **AERIAL AMP** provides 4 O/Ps from single I/P for use in freq range 162/174Mc/s as two stage transist amp on each O/P reqs 12/28v DC as N type connec approx size 6 1/2 x 6 1/2 x 2 1/2", these units were intended to operate sonar bouy Rxs can be adapted to other freqs. £16.50 **VHF AERIAL** 1/4 wave 29" long nom 125 Mc/s for aircraft mounting with insul base & connec for coax. £8.50 **VARIACS** 240v O/P 0 to 270v at 8 amps for int mount. £35 **ELEC MULTIMETERS** Services type CT371 see list for spec. £75 **Rx IF UNITS.** spare units for UHF Rxs self contained except for ext power I/P freq 23.975 as 1 stage at this freq & 3 at 1.975Mc/s inc L.O. crystal, as det & AF out uses 10 min valves. £17.50 **H.T. & L.T. POWER UNIT.** 240v I/P HTs 400v 300Ma & 350v 200Ma 150v stabie, 150v bias, 50v DC as two LTs 6.4v at 3.7 amps. size 16 x 8 x 9" new cond. £45 **ROT INV** 18v DC I/P gives 230v AC out at 180 watts sine wave new cond. £45 **PANEL METERS.** 500uA scale 0/500 2" dia. £2.50 1 Ma scale 0/10 1 1/4" dia. £3.50 100 uA scale 0 to 100 2 1/4" dia. £4.50 all new. **CRT IND UNIT** special purpose sonar ind with dual beam 5" sq tube P.7 trace as int EHT but reqs ext HT & LT modular construction approx 40 sub min valves with circs. £35 **TUNER HEAD** tunes 88/108Mc/s with 10.7 megs out reqs 12v Dc new. £6.50 **CAR AERIAL CB** type 27Mc/s approx 15" long rubber element with base coil and univ mount 13ft RG58 with plug new. £6.50. **CRYSTALS** mixed types & freq all new. 50 for £8.50 also on list High power photo flash equip inc conds & Flash Tubes. High power photo flash equip inc Caps, Flash tubes etc.

Above prices include Carr/Postage & VAT, goods new or in good cond. 2 x 18p stamps for List 39. Allow 14 days for delivery.

## A.H. SUPPLIES

122 Handsworth Rd, Sheff. S9 4AE. Phone: 444278 (0742).

## CRICKLEWOOD ELECTRONICS LTD

It's no secret!



that there is a real difference at Cricklewood Electronics. That's why you should never be without the **FREE CRICKLEWOOD ELECTRONICS COMPONENTS CATALOGUE**, for sheer variety, competitive prices and service from the U.K.'s number one 100% component shop. No gimmicks, no gadgets or computers, just components, millions of them, all easily available by mail order, calling or credit card telephone orders. Just pick up the phone (or a pen) to get your **FREE** copy now (no SAE required). You have nothing to lose.

**CRICKLEWOOD ELECTRONICS LTD.**  
40 Cricklewood Broadway NW2 3ET.  
01-450 0995 & 01-452 0161  
ALL MAJOR CREDIT CARDS ACCEPTED  
Telex 914977 Phone or write today



# Thinking of buying . . . . A Power Supply ?



The Power Supply. It's probably the most important bit of gear in the shack. It's the base that everything else is built on top of. As that base, obviously, any inadequacies in the power supply will be seen as a degradation in the performance of anything that's connected to it.

For example, a noisy power supply can cause both a horrible buzz on the transmitted audio and a reduced receiver sensitivity. Another example is when you connect a linear amplifier to a power supply that is just not man enough for the job – the power supply output voltage drops at peak transmit so you have less output power and a non-linear amplifier (more TVI).

Most radios are supplied without an integral power supply, the resultant savings in weight, bulk and cost make the radio more versatile and affordable. To use that radio at home you need a power supply of some sort and most radio amateurs cut corners when choosing this "accessory".

Don't think of it as an accessory. If you cut corners all of that expensive radio performance can be lost. You may even blow up your nice new radio. How many Hams can tell the story of the £500 radio that went up in a puff of smoke when they connected a twenty quid power supply to it. The repair bills can be horrendous (£14 an hour plus parts).

When choosing a power supply, check the specs. Just like you would if it were a radio or a linear. Protection, ripple, mains input voltage, shutdown, continuous versus peak. If you get confused by the terminology ask a friend – or better yet read the reviews.

When you see what's available then you'll probably be looking at one of three types (20 to 30 Amps is the most popular):

The BNOS 12/25A has a continuous output rating of 25 Amps (at 13.8V) yet can be used intermittently at thirty amps. In addition to this beefy output, it has a whole host of protection features.

Daiwa Power Supplies are imported from Japan. Their comparable model has a continuous output of only 20 Amps yet a rating of 30 Amps peak. As with all imported equipment check that the transformer is really rated for 240V not 220V, it makes a big difference when you look at Power Supplies.

BNOS's domestic competitor is Drae. Their top of range model – the unimetered 24A – has a maximum output of 24 Amps and a continuous rating of 18 Amps and, for some reason, a non-standard output voltage of 13.5 Volts.

As you can see from the table, the 12/25A is a comprehensively protected Power Supply Unit that is specifically designed for the radio amateur. **When you look at Power Supplies, don't compromise quality -- buy BNOS.**

## BNOS 12/25A SPECIFICATIONS


Input Requirements	240V AC 50 Hz ( $\pm 10\%$ )
Output Voltage	13.8V DC
Maximum Output Current	30 Amperes (at current shutdown)
Continuous Current Rating	25 Amperes
Regulation	0.1% for 10% change in input
Ripple	<20mV at max output (2mV typical)
Protection Features	Overvoltage, 100% Foldback Current, Radio Frequency Interference, Back EMF
Weight	9 Kilos
Dimensions	H 190mm x W 165mm x D 330mm

Buy **B.N.O.S.**  
Anything else is a compromise !

**B.N.O.S. ELECTRONICS LIMITED** Mill Lane, Stebbing, Dunmow, Essex, CM6 3SL.  
Tel: 0371-86681 Tlx: 817763 BNOS G

# GAREX THE SCANNER SPECIALISTS

## JIL SX-400 THE PROFESSIONAL SCANNER



- Basic coverage 26-520MHz
- AM, NFM & WFM
- Expandable from 100kHz to 1.4GHz with SSB and CW
- Computer control options
- IF output terminals
- Specifications set by professionals

£649

## AOR 2002

### THE WIDER RANGE SCANNER

- The receiver with the most Megahertz for your money
- Covers 25-550MHz, 800MHz-1.3GHz
- AM & NFM & WFM on all bands
- Computer interface socket
- 20 memories
- Compact size
- 12v dc operation
- Up/down step control



£487

## REVCO RS-2000E THE VERSATILE SCANNER



- Covers: 60-180MHz, 380-520MHz
- AM & NFM on all bands
- Search & store of active channels
- Channel activity counter
- 70 memories
- 12v dc & 240v ac

£279

## REVCON HX-850E THE SMALLER HANDY-SCANNER

- Covers: 25-100MHz or 60-90MHz plus 11.1MHz, 406-496MHz
- AM & NFM on all bands
- Full scan & search functions
- 20 memories
- ONLY 2.5" x 5.5" x 2"
- Nicads, charger & BNC whip antenna included

£279



## JIL SX-2000 THE SUPERIOR SCANNER



- The choice of the professionals
- Over reliability
- Covers: 26-88MHz, 108-180MHz, 380-514MHz
- AM & NFM on all bands
- Positive action keyboard
- 16 memories
- 12v dc & 240v ac

£325

## DON'T FORGET THE ANTENNA!


All receivers need a good antenna and the ideal one for a scanner is the REVCON, a 16 element discone. Made in Britain by Revco, a company that has been manufacturing quality antennas for the last 25 years, the REVCON covers 50-500MHz: is extremely well made and very good value at just £29.95

Also available - the RADAC dipole nest, 25-500MHz with extra performance designed for transmitting use. £69.95

## PRE-AMPLIFIERS

Broadband antennas usually have no gain, so pre-amps are often desirable. One mounted at the masthead amplifies the weak signals but not the noise generated in the feeder cable.

- ★ New range of high performance broadband amplifiers from REVCO now available. ASK FOR DETAILS ★



## GAREX ELECTRONICS

MAIN DISTRIBUTOR OF REVCO PRODUCTS. PRICES INCLUDE UK P&P and 15% VAT. Ask for details of our interest free credit. Extensive range of PYE radiotelephone spares - S.A.E. for list.

7 NORVIC ROAD, MARSWORTH, TRING, HERTS. HP23 4LS. Phone 0296 668684. Callers by appointment only.

Ask for details of our interest free credit.

Ask for our secondhand scanner bargain list.

## AMATEUR ELECTRONICS UK

G6XBH  
G1RAS  
G8UUS

R.A.S. (Nottingham)  
Radio Amateur Supplies  
Tel: 0602 280267



### Visit your Local Emporium

Large selection of New/Used Equipment on Show

#### AGENTS FOR:

F.D.K.  
AZDEN  
ICOM  
YAesu  
ALINCO  
KEMPRO

#### ACCESSORIES:

Welz Range  
Microwave Modules  
Adonis Mics  
Mutek Pre-Amps  
Barenco Mast Supports  
DRAE Products  
BNOS Linears & P.S.U.'s

AGENTS FOR CELLNET AND VODAFONE RADIOS

AERIALS, Tonna, Halbar, New Diamond Range of Mobile Whips, Jaybeam

BRING YOUR S/H EQUIPMENT IN FOR SALE

JUST GIVE US A RING

Monday: CLOSED Tuesday-Saturday: 10.00am to 5.00pm

3 Farndon Green, Wollaton Park, Nottingham NG8 1OU  
Off Ring Rd., between A52 (Derby Road) & A609 (Ilkeston Road)

Books for radio amateurs

**FDK**

AERIAL ACCESSORIES AND MASTS

**JAESU**

**ELLIOTT ELECTRONICS**

for the Radio Enthusiast

**THE 'HAM SHACK'**

APPOINTED DISTRIBUTOR

**JAYBEAM AMATEUR ANTENNAS**

OSY OLD MAN TO

**RIGS, ANTENNAS, SWR BRIDGES, POWER SUPPLIES, TEST GEAR, COMPONENTS, MORSE KEYS, COAXIAL CABLES, ROTATORS, MICS, PLUGS AND SOCKETS, SWITCHES**

Call us on (0533) 553293

OR COME AND LOOK AROUND AT

26/28 Braunstone Gate, Leicester

## FREQUENCY COUNTERS

HIGH PERFORMANCE  
HIGH RELIABILITY  
LOW COST

EX-STOCK  
DELIVERY

- ★ Measuring typically 2Hz - 1.5GHz
- ★ Sensitivity <50mV at 1500MHz
- ★ Setability 0.5ppm
- ★ High Accuracy
- ★ 3 Gate Times
- ★ Low Pass Filter
- ★ Battery or Mains
- ★ Factory Calibrated
- ★ 1-Year Guarantee
- ★ 0.5" L.E.D. Display

PRICES (Inc. adaptor/charger, P & P and VAT)

METEOR 100 (100MHz) £117.30 METEOR 1000 (1GHz) £204.70  
METEOR 600 (600MHz) £148.35 METEOR 1500 (1.5GHz) £232.30

ALSO: FUNCTION GENERATOR • COUNTER-TIMER • PAL PATTERN GENERATOR • DIGITAL MULTIMETERS



Designed and  
manufactured  
in Britain.



**Black Star**

BLACK STAR LTD, 4 Stephenson Road, St. Ives,  
Huntingdon, Cambs. PE17 4EB, England.  
Tel: (0480) 62440 Telex: 32762





# MICROWAVE MODULES LTD

## LINEAR AMPLIFIERS FOR EVERY OCCASION

**AVAILABLE NOW  
— THE NEW  
50MHz TRANSVERTERS  
WITH EITHER 144  
OR 28MHz IF's.  
ONLY £289.80 inc VAT.**



MML144/30-L



MML432/30-L



MML144/100-S

PRICES (incl VAT)

		£
MML144/30-LS	2m 30W Linear, 1 or 3W input	98.90 B
MML144/50-S	2m 50W Linear, 10W input	106.95 B
MML144/100-S	2m 100W Linear, 10W input	149.96 C
MML144/100-HS	2m 100W Linear, 25W input	159.85 C
MML144/100-LS	2m 100W Linear, 1 or 3W input	169.97 C
MML144/200-S	2m 200W Linear, 3, 10, 25W input	369.84 D
MML432/30-L	70cm 30W Linear, 1 or 3W input	169.05 C
MML432/50	70cm 50W Linear, 10W input	149.50 C
MML432/100	70cm 100W Linear, 10W input	334.65 D

Post/Packing: B = £4.91, C = £5.60, D = £6.98

CLUB SECRETARIES PLEASE NOTE . . .

FOR CLUB LECTURES IN 1987 RING MICK, G4EFO ON 0403 730767  
IF IT'S MICROWAVE MODULES IT'S GOT TO BE GOOD



MML432/100



MML144/200S



WELCOME

## MICROWAVE MODULES Ltd

BROOKFIELD DRIVE, AINTREE, LIVERPOOL L9 7AN, ENGLAND

Telephone: 051-523 4011 Telex: 628608 MICRO G

CALLERS ARE WELCOME, PLEASE TELEPHONE FIRST

**HOURS:**  
**MONDAY-FRIDAY**  
**9-12.30, 1-5.00**  
**E. & O. E.**



COMPACT

## Spacesaver ANTENNAS

AQ6 20, 2 El and Ele.

4 BAND, 6, 10, 15, 20 MHz

AQ40, 2 El and 40 M! NEW

**CLOSE COUPLED — HI'Q' — CAPACITIVELY LOADED YAGI**

### Special Features:

- Unique Altron fully sealed coils for maximum stability.
- Resonant length elements for improved SWR (1:1).
- Selectively detuned for optimum performance and gain. (No gimmick quad, needed).
- Easy trim spokes with lock nuts and spacers.
- Minimized wind load and weight.
- Double insulated elements.

**SEE REVIEW BY  
G4HCL IN APRIL  
HAM RADIO TODAY**

Typical Performance

ANTENNA MODEL	AQ6-2	AQ6-20/3E	AQ40/2E
Forward Gain Dbd	3.8 to 4.1	5.5 to 7.5	3.8
Front to Back Db	13 to 15	16 to 18	12
Side Null Db	75	25	20
VSWR (Typical)	1	1:1:1	1:1:1
Weight	5 lb	12 lb	12 lb
Wind Load	2ft <sup>2</sup> /0.18M <sup>2</sup>	3ft <sup>2</sup> /0.27M <sup>2</sup>	3ft <sup>2</sup> /0.27M <sup>2</sup>
Turning Radius	76"/1930mm	96"/2438mm	114"/2895mm

**PRICE + P&P £114.50 (£4.50) £169.00 (£7.00) £149.50 (£7.00)**

Prices exclusive of VAT, Terms C.W.O., Access, Visa.

**WE DESIGN — WE MAKE — WE SELL — DIRECT.**  
**You Get Best Value**

Callers welcome  
Open Mon-Fri 9am-5pm  
Sat Jan 10am-5pm

**ALLWELD ENGINEERING**  
UNIT 6, 232 SELSDON ROAD,  
S. CROYDON CP2 6PL.

Telephone: 01-680 2995 (24hr) 01-681 6734.

STOCK ITEMS NORMALLY DISPATCHED WITHIN 7 DAYS

# RST

MAIL ORDER CO.  
Langrex Supplies Ltd.,  
Climax House,  
159 Fallsbrook Road,  
Streatham, SW16 6ED.


## SPECIAL EXPRESS MAIL ORDER SERVICE

AZ31	2.75	EM81	2.50	PL519	6.00	6AK5	5.99	GKD6	8.00
CL33	4.00	EM87	2.50	PL802	6.00	6AL5	1.50	6LGC	5.00
DY867	1.50	EN91	6.50	PY33	2.50	6AM6	6.02	6LGC	5.75
DY802	1.50	EY51	2.75	PY81	1.50	6AN5	4.75	6L7	2.50
E88CC	10.33	EY86	1.75	PY82	1.50	6AN8A	3.50	6L06	7.50
E180F	12.05	EY88	1.75	PY83	1.25	6AQ5	3.25	6Q7	3.75
E810F	35.48	EY500A	3.00	PY88	2.00	6AR5	25.00	6RH8/6KN8	
EABC80	1.25	EZ80	1.50	PY500A	4.00	6AS6	8.86	6SA7	10.00
EB91	1.50	EZ81	1.50	PY800	1.50	6AS7G	8.75	6SC7	2.75
EBF80	1.50	EY501	3.00	PY801	1.50	6AUSGT	5.00	6SK7	3.25
EBF89	1.50	GZ32	4.00	QQV02-6	38.00	6AU6	2.50	6SK7	3.50
ECC91	8.00	GZ33	4.75	QQV03-10	26.25	6AW8A	3.75	6SL7GT	3.00
ECC33	4.50	GZ34	4.00	QQV03-20A	48.38	6B7	3.25	6SN7GT	3.00
ECC35	4.50	KT61	5.00	QQV06-40A	46.00	6B8	3.25	6SS7	2.75
ECC81	1.75	KT66	15.00			6BA6	1.50	6S57M	2.50
ECC82	1.75	KT77 GOLD	12.00			6BA7	5.00	6UBA	2.25
ECC83	1.75	KT88 LION	20.00			6B6E	1.50	6V6GT	4.25
ECC85	1.75	N78	15.00			6BH6	2.50	6X4	3.00
ECC88	3.50	OA2	3.25	SP41	6.00	6BU6	2.25	6X5GT	1.75
ECC91	8.93	OB2	4.35	SP61	4.00	6BN6	2.00	12AX7	1.75
ECC91	8.93	OC3	2.50	U19	13.75	6B07A	3.50	12BA6	2.50
ECC91	8.93	OD3	2.50	U25	2.50	6BR7	6.00	12BE6	2.50
ECC91	8.93	PC86	2.50	U26	2.50	6BR8A	3.50	12BY7A	3.00
ECC91	8.93	PC88	2.50	U37	12.00	6BS7	6.00	12E1	20.00
ECC91	8.93	PC92	1.75	UABC80	1.25	6BW6	6.00	12HGT	4.50
ECC91	8.93	PC97	1.75	UBF89	1.50	6BW7	1.50	30FL1/2	1.38
ECC91	8.93	PC98	1.75	UCH42	2.50	6BZ6	2.75	30P4	2.50
ECC91	8.93	PC99	1.75	UCH42	2.50	6C4	1.25	30P19	2.50
ECC91	8.93	PC100	1.75	UCH81	2.50	6C5	3.50	30PL13	1.80
ECC91	8.93	PC101	1.75	UCL82	1.75	6C6A	2.50	30PL14	1.80
ECC91	8.93	PC102	1.75	UCL83	2.75	6CD6GA	5.00	572B	55.00
ECC91	8.93	PC103	1.75	UCL84	2.75	6CL6	3.75	805	45.00
ECC91	8.93	PC104	1.75	UCL85	2.75	6CH6	13.00	807	3.75
ECC91	8.93	PC105	1.75	UCL86	2.75	6C4W	8.00	811A	18.33
ECC91	8.93	PC106	1.75	UCL87	2.75	6D6	3.50	812A	47.50
ECC91	8.93	PC107	1.75	UCL88	2.75	6D6S	7.50	813	65.00
ECC91	8.93	PC108	1.75	UCL89	2.75	6D6SB	4.75	866A	35.00
ECC91	8.93	PC109	1.75	UCL90	2.75	6EAS	3.00	872A	20.00
ECC91	8.93	PC110	1.75	UCL91	2.75	6EH5	1.85	931A	18.50
ECC91	8.93	PC111	1.75	UCL92	2.75	6F6	3.00	2050	7.50
ECC91	8.93	PC112	1.75	UCL93	2.75	6G6E	2.75	5763	4.50
ECC91	8.93	PC113	1.75	UCL94	2.75	6H6	3.50	5814A	4.00
ECC91	8.93	PC114	1.75	UCL95	2.75	6H6C	3.75	5842	12.00
ECC91	8.93	PC115	1.75	UCL96	2.75	6J5	4.50	6080	14.00
ECC91	8.93	PC116	1.75	UCL97	2.75	6J6	8.93	6146A	12.00
ECC91	8.93	PC117	1.75	UCL98	2.75	6J7	4.75	6146B	12.00
ECC91	8.93	PC118	1.75	UCL99	2.75	6J8A	6.50	6550	10.00
ECC91	8.93	PC119	1.75	UCL100	2.75	6J8C	7.50	6883B	12.50
ECC91	8.93	PC120	1.75	UCL101	2.75	6J8D	7.50	6813	7.50
ECC91	8.93	PC121	1.75	UCL102	2.75	6K6GT	2.75	7025	4.50
ECC91	8.93	PC122	1.75	UCL103	2.75	6K7	3.00	7027A	8.00
ECC91	8.93	PC123	1.75	UCL104	2.75	6K8	3.00	7360	10.00
ECC91	8.93	PC124	1.75	UCL105	2.75			7586	15.00
ECC91	8.93	PC125	1.75	UCL106	2.75			7587	23.00

Open daily to callers: Mon-Fri 9 a.m.-5 p.m.  
Valves, Tubes and Transistors - Closed Saturday  
Terms C.W.O. only, allow 7 days for delivery. Tel. 01-677 24247.  
Prices excluding VAT add 15%  
Quotations for any types not listed S.A.E.  
Post and packing £1.00 per order  
Telex 946708  
Prices correct when going to press

# Now from **AMCOMM** - ARE Carriage Free Nationwide Mail Order...

## UHF MOBILE




YAESU FT 770RH 70cm 25w FM high visibility display	495.00
YAESU FT 790R 70cm all mode	399.00
YAESU FT 2700RH 70cm 2m 25w each band full duplex	399.00
ICOM IC 490E all mode 70cms 10w/1w	617.00
ICOM 3200E 2m 70cm 25w each band	556.00
ICOM IC 47E 25w FM very small 9 memories	495.00

## HF EQUIPMENT



YAESU FT 767 1.8MHz-430MHz All mode gen cov rcvr	POA
YAESU FT ONE gen cov rcvr	1750.00
YAESU FT 980 gen cov rcvr inc AM/FM	949.00
YAESU FT 757GX gen cov rcvr inc AM/FM/Keyer	1465.00
ICOM IC 751A gen cov rcvr inc AM/FM/Keyer	925.00
ICOM IC 745 gen cov rcvr	929.00
ICOM 735 gen cov rcvr inc AM/FM	

## HF LINEAR AMPLIFIERS



YAESU FL 2100Z 160m to 10m	899.00
YAESU FL 7000 solid state integral PSU and ATU	1590.00
TOKYO HL 1K 1Kw amplifier	POA
TOKYO HL 1KGX new 1K linear	POA
TOKYO HL 2K new 2K linear	POA
TOKYO HL 3K 3Kw new linear	POA
ICOM IC 2KL LPS	1646.00

Plus the latest Ameritron range from the U.S. - see next page

## HANDHELD TRANSCEIVERS



FT 727 VHF UHF Hand held	425.00
YAESU FT 203R with FBA 5 battery case	225.00
YAESU FT 203R with FNB 3 nicad 2.7w	255.00
YAESU FT 203R with FNB 4 nicad 3.7w out	259.00
YAESU FT 209R with FBA 5 battery case 1.8w	269.00
YAESU FT 209R with FNB 3 nicad 2.7w	299.00
YAESU FT 209R with FNB 4 nicad 3.7w	305.00
YAESU FT 209R with FBA 5 battery case	275.00
YAESU FT 209RH with FNB 3 nicad 3.7w	309.00
YAESU FT 209TH with FNB 4 nicad 5w	315.00
YAESU FT 209RH with FNB 3 nicad 3.7w	225.00
ICOM IC 2E synthesised 1.5w 2m	289.00
ICOM IC 02E keypad entry lcd display	275.00
ICOM IC 4E synthesised 1.5w 70cm	289.00
ICOM IC 04E keypad entry lcd display 70cms	

FT 703R and FT 709R available same output spec as FT 203/209.

## RECEIVERS



YAESU FRG 8800 gen cov 150Khz-30Mhz large display, keyboard entry free tuning	609.00
ICOM IC R71 100 Hz to 30Mhz passband tuning/notch filter, variable tuning rate	789.00
YAESU FRV 8800 converter module 118-179 for FRG 8800 range extension	100.00
AOR 2002 UHF/VHF 25Mhz-550Mhz and 800 Mhz-1300Mhz	465.00
STAR BUY	
YAESU FRG 9600 UHF/VHF. Scanning receiver all mode 100 mem. Now up to 950Mhz	499.00
ICOM R700 Scanning rcvr 25-2000 Mhz 99 memories	919.00
all mode	189.00
FDK ATC 720 airband rcvr handheld 720 channels	159.00
FDK RX 40 141-180 Mhz handheld rcvr	598.00
JIL SX 400 UHF VHF rcvr inc PSU	

## RTTY/CW

TONO 5000E CW RTTY ASCII and AMTOR c/w 5" high res monitor	POA
--	-----


Range of 50 Mhz equipment both YAESU and ICOM in stock

## VHF MOBILE TRANSCEIVERS



YAESU FT 290R mob port 2m all mode c/w nicads, chgr. case, Mk II	POA
YAESU FT 290R as above with Mutek	POA
YAESU FT 270R 25w FM	379.00
YAESU FT 270RH 45w FM with fan	445.00
YAESU FT 2700RH 2m 70cms 25w each band full duplex	399.00
ICOM IC 290D 25w all mode	515.00
ICOM IC 27E 25w FM 9 mem	379.00
ICOM IC 27H 45w FM 9 mem	419.00
FDK M750XX 2m all mode 20w	449.00
FDK M725X 2m FM 25w	279.00

## VHF BASE STATIONS



YAESU FT 726R/2M all 726 options available	949.00
ICOM 271E multi mode 25w 32 mem	799.00
ICOM IC 271E/H multi mode 100w	979.00

## UHF BASE STATIONS

YAESU FT 726 70cms multimode — all 726 options	949.00
ICOM 471 E 25w multimode 70cms	889.00
ICOM 471 H high power multimode (75w) — 70cms	1099.00
ICOM 1271 E multimode 1240-1300 Mhz	1099.00

**CASH IN NOW, ON OUR HUGE BUYING POWER! ENORMOUS STOCKS WHERE A GOOD DEAL MORE COSTS A GOOD DEAL LESS!**

**AMCOMM** - ARE

373 Uxbridge Road, London W3 9RN, Tel: 01-992 5765. Telex: 24263

Showroom and Shop opening hours 9.30-5.00pm — Closed Mondays

PRICES CORRECT AT TIME OF GOING TO PRESS AND SUBJECT ONLY TO CURRENCY FLUCTUATION

Plus a full range of MARINE/PMR Communication Equipment. Carriage Free Nationwide Mail Order... SUPER H.P. TERMS AND TRADE-IN SERVICE





# Now from **AMCOMM** - ~~ARE~~ Carriage Free Nationwide Mail Order...

STOP PRESS... STOP PRESS...

## HF LINEAR AMPLIFIERS

**AL 84** 160M-10M, 600W P.E.P. 599  
**AL 80A** 160M-10M, 1000W P.E.P. 899  
**AL 1200** 160M-10M, 2000W P.E.P. 1599  
**AL 1500** 160M-10M, 2500W P.E.P. P.O.A.

## SOLE EUROPEAN AGENTS

STOP PRESS... STOP PRESS...

## VHF LINEAR AMPLIFIERS

### BNOS

LPM 144-1-100 2m c/w preamp 1w for 100w out 197.50  
 LPM 144-10-100 2m c/w preamp 10w for 100w out 175.00  
 LPM 144-3-100 2m c/w preamp 3w for 100w out 197.50  
 LPM 144-3-100 2m c/w preamp 3w for 160w out 250.00  
 LPM 144-25-160 2m c/w preamp 3w for 180w out 290.00  
 LPM 144-10-180 2m c/w preamp 10w for 180w out 125.00  
 LPM 144-3-180 2m c/w preamp 3w for 180w out 125.00  
 LPM 144-10-180 2m c/w preamp 10w for 50w out 230.00  
 LPM 144-3-50 2m c/w preamp 3w for 50w out 235.00  
 LPM 144-10-50 2m c/w preamp 10w for 50w out 195.00  
 LPM 432-1-50 70cm c/w preamp 1w for 50w out 329.00  
 LPM 432-3-50 70cm c/w preamp 3w for 50w out  
 LPM 432-10-50 70cm c/w preamp 10w for 50w out  
 LPM 432-10-100 70cm c/w preamp 10w for 100w out

MICROWAVE MODULES range also available, call for details or literature on above.

## ANTENNA COUPLERS

AMCOMM 9000 coax. random wire, tuned feeders 100w 89.00  
 CAPCO SPC 300C 1Kw antenna coupler 188.37  
 CAPCO SPC 3000C 3Kw antenna coupler 279.42  
 CAPCO SPC 300M 1Kw module only 103.09  
 CAPCO SPC 3000M 3Kw module only 132.18  
 CAPCO SPC 3000M 3Kw pep with SWR/power meter 115.00  
 TOKYO HC 200 8 band 200w pep with SWR/power meter 199.00  
 TOKYO HC 400 9 band 350w pep with SWR/power meter 399.00  
 TOKYO HC 2000 9 band 2Kw pep 85.00  
 TOKYO HC 2000 9 band 2Kw pep 345.00  
 WELZ AC 38 3.5-30Mhz 200w 485.00  
 ICOM AT 100 100w auto antenna coupler 339.00  
 ICOM AT 500 500w auto antenna coupler 59.0  
 YAESU FC 757GX auto antenna coupler  
 YAESU FRT 7700 receiver antenna tuner

## HEIL ACCESSORIES

HEIL HC3 Mic element Yaesu/Trio 22.85  
 HEIL HC5 Mic element Icom SM5/6 25.40  
 HEIL HM5 Desk Mic (300Hz-3KHz) cardioid 65.00  
 HEIL MM5 handheld Mic with HC3 29.00  
 HEIL SS2 Speaker special comms spkr 59.00  
 HEIL BM10 lightweight headset/boom mic 65.00

## POWER SUPPLIES

YAESU FP 757HD 20A 239.00  
 YAESU FP 757 GX 20A 169.00  
 YAESU FP 700 20A 195.00  
 BNOS 12/6amp 69.00  
 BNOS 12/12amp 115.00  
 BNOS 12/25amp 169.00  
 BNOS 12/40amp 340.00  
 BNOS professional range also available on request POA  
 ICOM IC PS 35 switch mode 193.00  
 ICOM IC PS 55 20amp 158.00  
 ICOM IC PS 55 20amp 185.00  
 ICOM IC2 KLPS to match IC2KL linear 429.00  
 ICOM IC PS 25 switch mode 112.00  
 SMC RS 12 4amp 5 amp peak 14.95  
 DRAE 4 amp 40.50  
 DRAE 6 amp 63.00  
 DRAE 12 amp 86.50  
 DRAE 24 amp 125.00

## HI-MOUND MORSE KEYS

HK 702 manual with marble base 42.50  
 HK 704 manual 28.50  
 HK 705 manual 22.50  
 HK 706 manual 23.00  
 HK 707 manual 22.25  
 HK 708 manual 21.50  
 HK 802 manual solid brass 99.00  
 HK 803 manual solid brass 99.00  
 MK 702 single lever paddle 29.95  
 MK 703 twin paddle squeeze heavy base 37.15  
 MK 704 twin lever without base 20.00  
 MK 705 twin paddle squeeze marble base 32.20  
 KENPRO KP 100 squeeze paddle/Cmos keyer 89.00  
 230v 13 8v  
 KENPRO KP 200 squeeze paddle/keyer multi memory 179.00  
 4096 bit

FIND OUT WHY WE'VE A REPUTATION FOR  
 FIRST CLASS VALUE & TOP QUALITY SERVICE...

where service and courtesy comes naturally...  
 373 Uxbridge Road, London W3 9RN, Tel: 01- 992 5765

Telex: 24263.

**AMCOMM** - ~~ARE~~ ORDER FORM

Please supply: ☐ by Cheque ☐ Barclaycard (Number Name Address Tel

I enclose payment for: £ ☐ Access (Number Call Sign

PW 4/87



## Public Service

**Sir:** Having just come through one of the coldest periods when many villages have been cut off from the rest of the country by deep snow, the thought has occurred as to whether amateurs really are providing a complete and proper service to the public.

What if a villager comes to an amateur in an isolated village and asks for a message that he is safe and well, to be passed to his family elsewhere, because the phones are not working and the mail can't get through? At present he has to be politely told although the amateur may be sitting in front of over £1000 worth of sophisticated

communications equipment, he cannot pass a simple message to give relief to the villager and his family because of licence restrictions.

None of the other major English speaking nations i.e. Canada, USA and Australia have these restrictions and, at a moments notice in any case of need or disaster, individual amateurs can swing into action and provide a much needed service of message handling for the public, via what are known as Third Party Traffic Networks.

In addition to the provision of much needed timely relief, public traffic handling is one of the best methods of

## LAUGH WITH BARTHES



"THERE'S SO MUCH NEEDS DIGGING IN THE GARDEN" - "YOU'RE RIGHT DEAR"



introducing the public to amateur radio and so showing that we are a service and not just an expensive hobby.

There is no doubt that a demonstration of satellite communication to the public can generate a lot of interest, but a member of the public who has just had a message confirming that his family is safe will have a much greater appreciation, and more important, understanding of what amateur radio is all about.

Special event call signs have been described as a

form of third party but are of no use for emergency traffic as most disasters do not give 28 days notice of when they are going to happen.

With increasing general pressure on spectrum, in future there will be a greater need for amateurs to justify the occupation of their bands. A full and strong tradition of public service would fill this need and provide a much improved public understanding of amateur radio.

**Mike J. R. Wade G80GO**  
**Rye, E Sussex**

## PW COMMENT

### The New PW

AS ANNOUNCED LAST MONTH, we shall be making some changes to *Practical Wireless*, commencing with the May issue. Some of our special features for DX listening and viewing enthusiasts will be transferring to the new *Short Wave Magazine*, and some of *SWM*'s regular columns aimed at readers (whether licensed or not) whose specific interest is amateur radio will be crossing over into *PW*.

The most sweeping changes in *PW* will be in *On the Air*. Reports of happenings on the h.f. amateur bands will be compiled by Paul Essery G3KFE, while those on v.h.f. and above will be the province of Norman Fitch G3FPK. The present *Amateur Bands* column written by John Fell GOAPI will disappear, though John will not be severing his connection with the magazine.

Ron Ham's column on RTTY will continue more or less unchanged in *PW*, but his present *VHF Bands* feature will be largely reorganised. The broadcast Band II DX reports will transfer to *SWM*, and the remainder of the feature, which is staying in *PW*, will deal with propagation reports from h.f. to u.h.f., including beacons, amateur, CB and broadcast bands, plus solar and barometric observations. Ron's TV column will be transferred more or less unchanged into *SWM*.

Amateur satellite happenings will continue to be reported in *PW* by Pat Gowen G3IOR, but his news of other satellites and space events will cross into *SWM*. Brian Oddy's comprehensive coverage of stations heard on the long, medium and short wave broadcast bands will also be moving into *SWM*, but a brand new feature in *PW* will give a brief round-up of the most important happenings on the broadcast bands.

*Short Wave Magazine*'s counterpart of *On the Air* will be called *Seen and Heard*. As already mentioned, it will include contributions by Brian Oddy, Pat Gowen and Ron Ham, but there will some new columns, too. These include *Amateur Bands Round-up* by Justin Cooper, and a data communications

column called *Decode*, covering RTTY, AMTOR, packet, FAX, etc, compiled by Mike Richards G4WNC.

Among other features to be found in the new *SWM* will be reviews and regular buyers' guides to receivers and scanners, news of broadcasting stations and studios, and a "Starting Out" series for newcomers to short wave listening. And there will be occasional simple constructional articles on antennas and receiver accessories, too. There are other ideas "in the pipeline", but more about those when they're fully developed.

And what other changes shall we be making to *Practical Wireless*? Well, in response to recent pleas from our readers, more constructional features are planned, plus more articles on repairs, renovation and fault-finding. Again, we have a few more ideas up our sleeves, but these are still being finalised at the moment.

As I said last month, these changes are bound to upset some readers, who would prefer things to remain as they were. We hope that you will find one or other of the two "new" magazines to your liking (or better still, both, but we appreciate very well that for many readers, money is pretty tight).

Subscribers to *PW* who would prefer to transfer the remainder of their current subscription to *SWM* can do so, and will receive the same number of issues, at no extra charge, despite the higher rate for that title. Subscribers to *SWM* who would rather transfer their subscription to *PW* can also do so, but for them the **money value** of the unexpired portion of the subscription will be credited, to allow for the higher rate at which they paid, and their subscription extended accordingly. For readers wishing to subscribe to both titles, a special rate for UK subscriptions of £27.00 will be offered, giving a 10 per cent discount on the normal rates (£13.00 for *PW*, £17.00 for *SWM*). For overseas readers, where the surface mail rates are £15.00 and £17.00 respectively, the special combined rate will be £29.00.

**Geoff Arnold G3GSR**



## Listening In

**Sir:** I feel I must support Mr Thomson (*PW* Feb '87) in his call for *Practical Wireless* to cover more than just Amateur Radio.

I for one would like to see some magazine deal with utility stations, though I realise that the listening to these stations is a rather grey legal area. Having said that, the multitude of weather stations provide interesting clues to propagation conditions and are no more illegal to listen to than WWV.

Listeners are obviously interested in these stations as the sale of scanners and frequency lists for both h.f. and v.h.f./u.h.f. proves, so perhaps they might deserve some space.

**Matthew Probert**  
Basingstoke

**Sir:** It's not very often that I decide to put pen to paper, but after reading M. Thompson's letter (*PW* Feb '87) I felt that I must write and chip in my two penn'orth. I would like to say how much I endorse the said

gentleman's comments regarding the lack of material in your magazine printed for the benefit of the Short Wave Listener.

I am a keen s.w.l. and, although I listen to the amateur bands, I have no wish to become a radio amateur.

I am fairly confident in saying that there are many more s.w.l.s in the four countries within the British Isles than radio amateurs. Whilst not wishing to incur the wrath of the amateur fraternity, I am raising this point because thousands of these unheard radio enthusiasts must surely buy *PW*, if only for the excellent "On the Air" feature.

What I am really suggesting is that you include a regular feature on the hobby of short wave listening, incorporating articles on antenna construction, how to get started, receiver alignment, hints and tips, the list is endless. Maybe even a *PW* Short Wave Listening Club?

**L Smart**  
Trelewis, Wales  
*Your wish is our command.—Ed.*

Send your letter to the Editorial Offices in Poole, the address is on our Contents page. Writer of the Star Letter each month will receive a voucher worth £10, to spend on items from our PCB or Book Services, or on *PW* back numbers, binders, reprints or computer program cassettes. And there's a £5 voucher for every other letter published.

Letters must be original, and not duplicated to other magazines. We reserve the right to edit or shorten any letter. Brief letters may be filed via our Prestel Mailbox number 202671191. The views expressed in letters are not necessarily those of *Practical Wireless*.



## Looking Back

**Sir:** I was delighted that you published G4NJP's response to my letter in your December issue as it amply illustrates the apathetic "live and let live" attitude of a number of RSGB members.

I received an enormous number of supportive letters from individual members, secretaries of affiliated clubs and even area representatives. None of these, I am happy to report, criticised the voluntary committees but rather the HQ organisation. Because one qualifies as a "volunteer" does not automatically mean that you are a qualified administrator.

The RSGB, I am told, represents only about 43 per cent of licensed amateurs. Let's improve on this.

The December AGM brought out the feelings I expressed about proxy votes and pressure from the attendees compelled the Council to abstain from exercising this undemocratic practice.

Had I insisted, in my business, that employees of less than five years' standing had no voice in management decisions I would have long since been bankrupt.

**Vic J. Copley-May G3AAG**  
Petersfield

**Sir:** Full marks for your feature "Trials of a New Licensee". Also full marks to G1SGB for his doggedness in getting started against such odds and the factual way in which he gives his sad but useful information.

What a contrast to 40 ▶

# OUR SERVICES

## QUERIES

We will always try to help readers having difficulties with a *Practical Wireless* project, but please observe the following simple rules:

1. We cannot give advice on modifications to our designs, nor on commercial radio, TV or electronic equipment.
2. We cannot deal with technical queries over the telephone.
3. All letters asking for advice **must** be accompanied by a stamped, self-addressed envelope (or envelope plus International Reply Coupons for overseas readers).
4. Write to the Editor, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, giving a clear description of your problem.
5. Only one project per letter, please.

## COMPONENTS, KITS AND PCB'S

Components for our projects are usually available from advertisers. For more difficult items, a source will be suggested in the article. Kits for most of our more recent projects are available from **CPL Electronics**, 8 Southdean Close, Hemlington, Middlesbrough, Cleveland TS8 9HE, telephone Middlesbrough (0642) 591157. The printed circuit boards are available from our **PCB SERVICE** (see page 1 of this issue).

## CONSTRUCTION RATING

Each constructional project is given a rating, to guide readers as to its complexity:

### Beginner

A project that can be tackled by a beginner who is able to identify components and handle a soldering iron fairly competently.

### Intermediate

A fair degree of experience in building electronic or radio projects is assumed, but only basic test equipment is needed to complete any tests and adjustments.

### Advanced

A project likely to appeal to an experienced constructor, and often requiring access to workshop facilities and test equipment for construction, testing and alignment. Definitely not recommended for a beginner to tackle on his own.

## BACK NUMBERS AND BINDERS

Limited stocks of most issues of *PW* for the past 18 years (plus a few from earlier years) are available at £1.25 each, including post and packing to addresses at home and overseas (by surface mail).

Binders, each taking one volume of *PW*, are available price £5.50 to UK addresses, £5.75 overseas, including post and packing. Please state the year and volume number for which the binder is required. Prices include VAT where appropriate.

## CLUB NEWS

If you want news of radio club activities, please send a stamped, self-addressed envelope to **Club News**, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, stating the area of the country you're interested in.

## ORDERING

Orders for p.c.b.s, back numbers and binders, *PW* computer program cassettes and items from our Book Service, should be sent to **Post Sales Department**, "Practical Wireless", Enefco House, The Quay, Poole, Dorset BH15 1PP, with details of your credit card or a cheque or postal order payable to Practical Wireless. Cheques with overseas orders **must** be drawn on a London Clearing Bank.

Credit card orders (Access, Mastercard, Eurocard or Visa) are also welcome by telephone to Poole (0202) 678558. An answering machine will accept your order out of office hours.

## SUBSCRIPTIONS

Subscriptions are available at £13 per annum to UK addresses and £15 overseas, from "Practical Wireless" Subscription Department, Competition House, Farndon Road, Market Harborough, Leicestershire LE16 9NR. Tel: (0858) 34567. Airmail rates for overseas subscriptions can be quoted on request.

► years ago when the newcomer was welcomed, helped and treated fairly by all concerned—even by the RSGB, when members were more important than their subscriptions. The cavalier treatment of G1SGB is not reserved for newcomers. It echoes, in close detail, a recent "hassle" of mine, when a "short deadline" member's ad achieved copy three months after payment.

I am struck by the irony (*PW*, same issue) of the wet letter by one G4NJP, who first tries to disparage the considered arguments of G3AAG in a snide and ill-mannered way and then exhorts the RSGB to "carry on the good work". I wonder what G1SGB makes of that? Then he mentions "democracy". Would the RSGB publish this letter?

**J. Leonard G3CUN**  
Birmingham B36

**Sir:** Here's some cheer to publish re the RSGB. When I sent my full subscription in December 1986 to RSGB I asked for a form to apply for reduced subscriptions the following year as I was 65 in November '86. Imagine my surprise (and joy!) when my cheque was returned and I was asked to send the **reduced** subscription this year.

**Don Owen G0ESR**  
Stourbridge

## A Trusty Steed

**Sir:** The true moral of Mr Clark's experiences (letter, *PW* February 1987) is obvious: stick to the mechanical craftsmanship of the trusty HRO rather than waste time, effort and money on the string and pulley system of a cheap Japanese receiver! I certainly know which one will survive beyond AD2000!

**Michael O'Beirne G8MOB**  
Esher, Surrey

## You Can't Please Them All?

**Sir:** Reference *PW* September '86, 50MHz Converter. Why choose a converter with 144MHz output when, as usual, most s.w.l.s use a 28–30MHz receiver as an i.f. strip. To

## Novice

**Sir:** How relieved I was to see that there was a response to my "star" letter in the September issue. I was beginning to think nobody had noticed it!

My reaction after reading Mr Davies's letter was of laughter. No doubt he will be phoning the National Tiddleywinks Association, the Luton Girls Choir and Alcoholics Anonymous for their views next.

Really Mr Davies, your logic is lamentable! CB operators and s.w.l.s may well be considered novices, but certainly not Novice Amateurs. Novice Amateurs are Amateurs, they pass exams, they are permitted to own and operate Yaesus etc., and they are issued with official call signs such as VK4VOK. So your 500 phone calls were not only a waste of money, they were

also a waste of time.

Prior to 1976, our system was exactly the same as yours! By putting two more steps in the ladder we not only encourage more beginners to have a go, we also made it easier for those halfway up to reach the top. The new system is an unqualified success. Had it not been a success, it would have been scrapped.

Another myth I would like to dispel, is the belief held by some of you that our Novice Amateurs are only capable of 5 w.p.m. Morse. Some of them can operate at over 30 w.p.m. The requirement for a Novice licence is a **minimum** of 5 w.p.m. Because our "B" licence amateurs can get Novice privileges on h.f. by passing 5 w.p.m. Morse, it provides them with an intermediate step to the "A" class licence. You don't have to be a genius to see

why we will never revert to your system, surely?

Please permit me to end this letter with an extract from a letter written by Richard Rhodes KH6IO of San Antonio, Texas to *CQ Amateur Radio*, Dec '85 issue:

"I strongly support the proposed expansion of (American) Novice privileges (to include phone). During the peak of the last sunspot cycle, I sat on the island paradise of Kauai, Hawaii and operated h.f. for 8–12 hours a day. Some of my nicest sideband QSOs were with Australian and Japanese Novices. Most of them were more gentlemanly and polished than many of the "lids" who thought 30 years in ham radio had turned them into radio royalty..."

**Tony Taylor VK4FOX**  
Innisfail, Queensland

## Time Signals

**Sir:** I was interested to read Old Timer's piece on 1920s Time Signal's in the Feb '87 issue. May I comment on one or two points.

The English radio buff at the beginning of the 1920s was not limited to listening to time signals only. The Co-optimists and the Roosters were indeed some years away but there were the regular "Hague Concerts" transmitted on 261kHz from station PCGG in Holland.

I believe there were more time signals from the Eiffel Tower than indicated in the article. By the early 1920s there were seven groups of time signals transmitted during the day, starting with a 9.26–9.30a.m. period and finishing with the 10.44–10.46 group. The groups were not all coded in the same way, some being in "International" code ending with a dash during the 60th second; and some


being in what was termed "Ordinary" code with dots marking the minutes as described in the article. The accompanying contemporary diagram shows the code.

Regarding time signals for East Germany, Nauhen (Y3S) has for many years been transmitting time signals on 452kHz. Does Old Timer mean that Radio Berlin International has announced that they are once more coming up on long wave to suit his splendid 1918-style

crystal set?

Finally, the "Tempus" crystal set of the early 1920s was not the first to be commercially produced for reception of Eiffel Tower and other time signals. The "Horphone" was manufactured for this purpose from 1913 by the Synchronome Co. of London. The Eiffel Tower time signal service had started three years earlier in 1913.

**Patrick Leggett**  
Farnham, Surrey

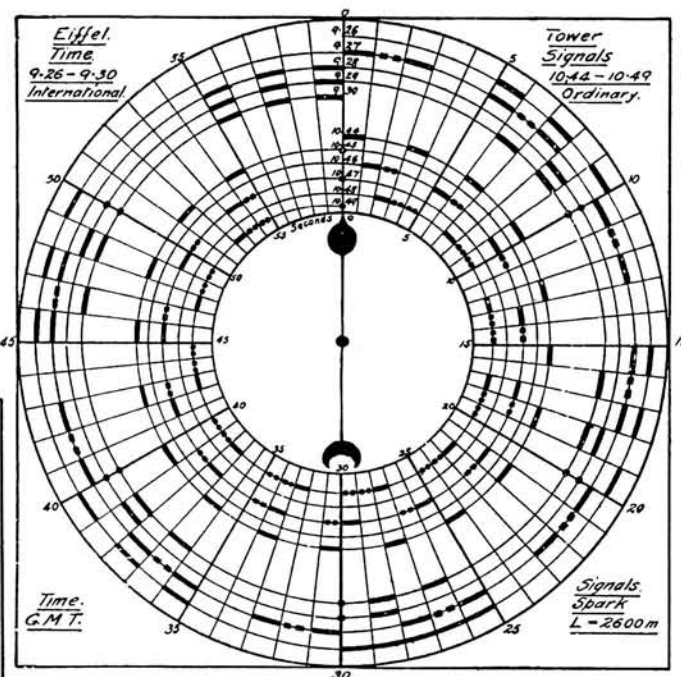

use this unit, I would have to have in my possession a 144MHz rig or receiver, both very costly when you are unemployed. A 28–30MHz output would be less noisy and easier to use (i.e. FRG-7).

**R. G. Williams**  
Borehamwood, Herts



## BARTG Awards

There are three awards awarded by BARTG that you can try for.

**Quarter Century Award.** This is for having worked or heard amateur radio stations in at least 25 different countries.

**Century Award.** This is for having worked or heard the required number of amateur stations on the v.h.f., u.h.f. and s.h.f. bands.

**Members Award.** This is for having worked or heard at least 25 different BARTG members on any band.

You can always get leaflets on any of these awards for an s.a.e. to the Awards Manager,  
**Ted Double G8CDW,**  
89 Linden Gardens,  
Enfield, Middlesex,  
England  
EN1 4DX.

Recently we reported a young lady taking her Morse test, nothing unusual you say. Well not normally, but this young lady was 10 years old at the time! So I thought I'd like to hear more.

Sarah J. Rutt is now eleven years old, but started studying the RAE in July 1985. Her story is best in her own words.

"I studied for about nine months, doing half an hour on my own and one hour or twenty minutes with Dad every day. I like the mathematical side of it, some of which was easy and some difficult. The regulations I didn't understand, didn't like and found extremely difficult.

... I took the exam on May 16. I was excited but nervous. I discovered that I

## Youngest YL?

had got some wrong in the first half from Dad during the break. It made me even more nervous.

... I waited for the results for three months. Then just as we were about to go on holiday a large envelope ... came through the door ... 'This is to certify ... has passed the RAE with the following:

Distinction  
Distinction'

... I had started studying for the Morse test as soon as I had taken the RAE ... I studied for three or four months in all.

... I took the Morse test on August 20 ... After sending and receiving lots of bits and pieces I got my ARC (No. 3644) a few days before Dad went to Israel, which meant that I only had

a few days to use the radio.

... I got in a muddle using the radio at first. Most of the time I ran out of things to say."

Sarah took the QRQ run at the HF Convention too! Now she is building a 7MHz band receiver from a kit.

At least we know that with youngsters like Sarah there will be another generation of radio amateurs to take our places. So if you hear a young person on the air don't assume they're all pirates, being sworn at when you're only young isn't fair. Without new blood into the hobby it will grow stale, old and die.

Sarah, the magazine wishes you all the best with both amateur radio and any other challenges you decide to take on.

## DXpedition

From Saturday March 21 to Saturday April 4, a party of three operators will activate the Universal Locator Squares of IO41, 42, 43, and 44 consecutively, each for a period of three days.

The station will operate on the 144MHz band using 144-244 u.s.b. whenever possible with a 70-element array and the maximum permitted p.e.p.

For further information and/or schedule arrangements contact: **Craig G6GRK QTHR or Leeds G38919.** Please enclose an s.a.e. with written enquiries.

## BAEC

The latest newsletter from the British Amateur Electronics Club has landed on my desk recently. It contains plenty of interesting reading, there's an article on Opto-electronics, part 8 of a series on computers, plenty of readers' letters as well as for sale and news, views and reminders.

Annual subscription is £7, and if you would like more details then write to: **Hon. Secretary, J. G. Margetts, 53 High Oaks Close, Locks Heath, Southampton SO3 6SX.**

## Silver Jubilee

On April 27 the Loughton & District ARS are celebrating their 25th anniversary. Although over the years they have lost a few members, some have moved away and others, sadly, 'now operating the big transceiver in the sky', they have gained new faces and are always looking for more.

They actually featured in *Practical Wireless* back in 1966, and Jack Atkinson G3OPA (then the club secretary) who was in the photograph then is still with the club today.

We wish the club all the best for the next 25 years when we look forward to mentioning their Golden Jubilee.

## Bristol FMTV Group

The Bristol FMTV Group is now well and truly established with over 30 paid-up members, the group's first project is therefore assured a good chance of success.

The first project being undertaken by the group is a 23cm FMTV repeater for Bristol. So far they have:

A full technical submission approved by the RSGB repeater management group that has been passed on to the DTI for the issue of a licence.

They have applied for

GB3ZZ, a frequency of operation of 1.249GHz input, 1.3185GHz output, f.m. operation, and 25 watts horizontally polarised.

The repeater will be capable of full colour high definition pictures with intercarrier sound over most of the Bristol areas as well as South Wales, Bath and the Cotswolds.

So far site tests have had good pictures received from Bath, Forest of Dean and South Wales.

Their AGM will be on March 24 so if you are interested in finding out more contact **Roger G4ZQF, QTHR.**

## Morsum Magnificent

If you don't get enough time to read novels but do like a book or magazines you can read snippets from, the *Morsum Magnificent* might appeal to you.

It is a quarterly magazine to provide international in-depth coverage of all aspects of Morse telegraphy, all for a £6 annual subscription.

The latest issue is full of interesting short articles, some about people and their collections of Morse keys, historical items of milestones in the story of Morse, personal reminiscences and anecdotes. All enjoyable reading.

For subscription to *Morsum Magnificent*, send your cheques payable to *Morsum Magnificent* to **Tony Smith G4FAI, 1 Tash Place, London N11 1PA.**

## Remote Imaging Group

This group are the ones to contact for lots of gen on getting into weather satellite watching. If you already watch these satellites then that is an even better reason for joining their ranks. Their newsletter (called *RIG*) is packed full of articles, with data for finding the satellites to projects for decoding etc.

For more details contact: **Des Watson G3YXO, Norton, Gote Lane, Ringmer, Nr Lewes, East Sussex BN8 5HX.**

## Radio Netherlands

On Monday April 20, Radio Netherlands are planning a documentary looking at 40 years with Radio Netherlands, including some of the famous personalities they have spoken with over 4 decades of broadcasting

# NEWS... compiled by G4LFM

## BRARS

In 1964 a small number of dedicated Railway Radio Amateurs formed an International Organisation called FIRAC—Federation Internationale des Radio Amateur Cheminots.

Since its inception the organisation has grown to over 2500 members of which British Rail ARS is a small cog.

This year BRARS is celebrating 21 years since its inception in 1966, and during the year the Society is arranging several radio stations from railway sites,

using either GB calls or the club callsign G4LMR.

The first planned event is May 8–10 at Ravensglass using the callsign G4LMR.

Other events during the year that they hope to be involved in are the 150th Anniversary of Crewe Railway Workshops, Didcot Steam Weekends and a special event station from one of London Transport's Tube Stations.

For more details of BRARS contact: **Geoff Sims G4GNQ, 85 Surrey Street, Glossop, Derbys SK13 9AJ.**

## SMC Phone Home?

South Midlands Communications have changed their telephone numbers. The new numbers are:

Tel: 0703 255111  
FAX: 0703 263507  
TLX: 477351 SMCMM G

## Can You Help?

Mr C. Edwards recently purchased a Grundig Satellit 1000, but there was no instruction booklet with the set. He would also like to listen to amateur radio using this set, but needs an s.s.b. adaptor unit. If you can help please contact: **C. Edwards, 3 Link Avenue, Bedlington, Northumberland.**

Mr McTernan has a Siemens Phonosuper K53 table top radiogram, which is working, but only just! He would like a copy of the wiring diagrams to enable him to get the set working properly. If you can help contact: **Mr P. McTernan, 13 Eastern Avenue, Pinner, Middx HA5 1NW.**

Mr Kirk has "a most beautiful reel-to-reel video recorder" which he wants to use with his SSTV gear. He needs a circuit, can anyone help? It was made by Internation Video Corporation of California, Model IVC801PSM, it also has a plate marked The Marconi Company recorder video 1430-99-537-4294 identity VA-49-0009-3.

If you can help contact **Mr N. Kirk G3IDK, 54 Allendale Road, Rotherham, Yorks S65 3BY.**

## Mid Lanark Open Day

The Mid Lanark ARS is holding its Open Day on June 14. They are hoping to run satellite operation, RTTY demos, h.f. working, DXing and QRO. That's in addition to the usual junk stand and car boot sale. They do say that as usual trade stands will be there too.

More details from the club sec: **David Williams GM1SSA. Tel: Holytown 732403.**

## Special Event Station

**GB2RCK:** The Rotary Club of Kirkwall are holding a Hobbies Exhibition in the Town Hall, Kirkwall, Orkney on March 14/15.

The exhibition will be open from 10am–4.30pm and again from 7–9pm on the Saturday, and 2–5pm on Sunday.

More details from **Bill BM3IBU, QTHR.**

## GB3SE

In early November 1986, GB3SE was granted a licence by the DTI. On November 21 at 2100 it was switched on into full repeater/beacon use in Stoke-on-Trent.

GB3SE can be found on 1.297075GHz, whilst it's receiver input frequency is on 1.291075GHz. When not in use the transmitter stays on the air for beacon purposes and identification is by frequency shift keying at a rate of one callsign every 35 seconds, each

eight callsign is transmitted using m.c.w.

Repeater use is obtained by the usual method of transmitting a 1.750kHz toneburst. To acknowledge the fact that GB3SE has switched from beacon to repeater use, a letter "T" in Morse code is transmitted, alternatively a letter "H" or "L" if the carrier frequency on the input is more than plus or minus 5kHz from the nominal input frequency, this is then followed by the repeater callsign in m.c.w. For an indication as to when the repeater mode has

finished, a tone of 1 second duration and 400Hz audio frequency is transmitted, the carrier will of course continue to radiate and the next identification callsign will be sent using f.s.k.

At the moment GB3SE is running 6 watts e.r.p., the antennas in use are two Alford slots (horizontal polarisation omnidirectional). During the first 24 hours of use, a total of 12 different callsigns were monitored.

More information can be obtained from: **G8DZJ, QTHR.**

## Rally Dates

**3 May:** The 4th Anglo-Scottish Rally will be held in Kelso's Tait Hall from 11am to 5pm.

There will be the usual talk-in on S22, traders' stands, club stands, hot and cold snacks, bar, raffles and Morse Tests, to mention but a few things.

Entrance is £1, but juniors and accompanying YLs and XYLs are most welcome and admitted free. For more information contact **Andre Saunders GM3VLB on 0573 24664** any evening.

**11 May:** The annual Drayton Manor Mobile Rally will be held at Drayton Manor Park and Zoo, Fazeley, near Tamworth.

The Park is on the A4091, 1m south of the A5/A4091 junction at Fazeley. Talk-in will be on both 144 and 430MHz using the callsign **G3MAR/A.**

**21 June:** The Denby Dale & District ARS will be holding their annual rally at Shelley High School. That's 8km south-east of Huddersfield.

Doors open at 11am (10.30 for the disabled). There is free parking, usual trade and club stands, lucky draw, bring and buy, children's entertainments, bar and the usual good food.

For more details contact **G3DSY, QTHR or Tel: 0484 602905.**

**19 July:** The fifth McMichael Rally is being held at the Haymill Centre, Burnham, near Slough. Doors open at 10.30am (10.15 for the disabled).

A large number of national and local traders are expected and a car boot sale has been arranged for those with only a few items to sell.

Other attractions will be many demonstrations, including a mini fairground, radio controlled models and a CAMRA beer tent.

Amateur TV will be in operation as will a special h.f. station **GB4MR**, all contacts will receive a special QSL card.

**5 April:** Pontefract & District ARS are holding a components fair for radio and electronic enthusiasts in the Carleton Community Centre, Carleton, nr Pontefract. Doors open from 11am to 4.30pm and admission is free.

Attractions are: trade stands, licensed bar, refreshments, bookstand and much more. For more details contact **C. A. Mills. Tel: 0977 43101.**

**5 April:** The Cambridgeshire Repeater Group are holding their 5th Junk Sale Extravaganza at Pye Telecom Canteen, St. Andrew's Road, Chesterton, Cambridge. Doors open at 10.30am for an all day event.

Trade stands will be there as well as the "monster" junk sale auction. More details from **G8KMS, QTHR. Tel: 022 023 3362.**

**24 May:** The 11th East Suffolk Wireless Revival is being held at the Civil Service Sportsground, Straight Road, Bucklesham, Ipswich.

Attractions are: traders, car boot sale, antenna testing range, childrens' play areas and model flying display to name but a few. Entrance and car parking costs £1. More details from **Jack Toothill G4IFF. Tel: 0473 464047.**



## 144MHz Colinear Antenna

Ant Products have sent me a copy of the first issue of the *Tiger Antenna Newsletter* which, as well as interesting articles and news items, has details of their latest Tiger colinear antenna for 144MHz operation.

It is claimed to have a gain of 7dB from the three half-wave configuration and that with a correctly matched and decoupled coaxial feeder no unwanted radiation occurs from the outer braid of the feeder. This ensures that all the r.f. energy is radiated by the antenna.

The matching and electrical connections are housed inside a polythene insulator which is moulded into a completely machined alloy body carrying a weather-proof SO239 socket.

An alloy ring is fitted to the lower part of the antenna and is secured by means of a 6mm grub screw. The ring supports five stainless steel spokes forming a quarter-wave choke and effectively insulating the lower part of the tubing used to mount the complete antenna. The position of this ring can be adjusted to tip the v.s.w.r. curve to either end of the band. A stainless steel Jubilee clip is used to secure the socket assembly into the lower half of the mast, providing good electrical and mechanical integrity for this part of the antenna.

The antenna will easily handle the maximum legal power and should be mounted as high as possible and in the clear.

For further details and a copy of the Newsletter contact **Ant Products, All Saints Industrial Estate, Baghill Lane, Pontefract, West Yorkshire. Tel: (0977) 785274.**

## FRG-9600 Mods

After months of development R. Withers Communications have released details of their latest h.f. mods for the Yaesu FRG-9600. The mods give coverage from 100kHz to 950MHz, improved S meter and a typical receiver sensitivity of better than 2µV p.d. at h.f. At frequencies of 60 to 950MHz the sensitivity improves to better than 1µV (12dB SINAD).

RWC fit a high performance h.f. front end made for them by AKD. This is fitted internally with switching circuits and a small toggle switch on the rear apron to enable band changing with the display reading actual frequency (100kHz to 60MHz).

The standard SO239 connector is replaced by an

"N" type for coverage from 60 to 950MHz and an SO239 fitted for h.f. coverage.

The fitting of an "N" type connector means that it is now possible to use a wide-band discone antenna such as the Icom AH7000 which is fitted with low-loss cable and "N" type connectors as standard. A dipole or long wire antenna can be used for the h.f. coverage.

New FRG-9600s are available from RWC in two versions. Option 1 is an FRG-9600 Mk2 series 2 with 60 to 950MHz "N" type connector for £519.00 plus £5.00 carriage. Your standard FRG-9600 can be modified by RWC for £40.00 inc. VAT and return insured carriage.

Option 2 is an FRG-9600 Mk3 with internal switchable h.f. mods (100kHz to

950MHz), actual frequency readout, "N" type connector for 60 to 950MHz and SO239 for h.f. This costs £625.00 plus £5.00 carriage. Modifying your own set will cost you £129.00 inc. VAT and return carriage. In this case the 950MHz extended coverage will be fitted at the same time. If you already have the Mk2 then fitting the new h.f. mod will set you back £99.00 inc. return carriage.

All mods are fully guaranteed for twelve months from purchase or modification providing RWC's seals are unbroken.

Further details are available from **R. Withers Communications Ltd., 584 Hagley Road West, Oldbury, Warley, Birmingham B68 0BS. Tel: 021-421 8201.**

## Mobile Microphone

With the new *Highway Code* recommendations effectively banning hand-held microphones in cars, some form of vehicle mounted microphone is essential.

For some months Waters & Stanton have been experimenting with various types of mics in an effort to find one suitable for mobile use and which neither obstructed the driver's vision or was attached to his body. The result is the Adonis FX-8.

This unit is capable of being mounted away from the operator, on the dash board or sun visor for instance. The highly directional microphone unit is fitted with back-to-back electret capsules and comes with all the hardware for fitting onto the dash or sun visor. Unlike normal noise

cancelling mics, the output of each capsule is fed into separate amplifiers that are driven back-to-back and only the difference signal—the operator's voice—is fed to the transceiver. Ambient noise is virtually eliminated. A gearstick mounted control box with UP/DOWN buttons completes the system and has a level control to match the mic to the rig. The only extra required is a suitable mic plug for the rig.

Tests carried out in an old and noisy Range Rover with the mic at least a metre away from the operator showed very good results, with extremely low background noise and an audio quality similar to a conventional fist mic.

The Adonis FX-8 costs £69.95 inc. VAT from **Waters & Stanton Electronics, 18-20 Main Road, Hockley, Essex SS5 4QS. Tel: (0702) 206835.**

## 1296MHz ATV Antenna

If you are into 1296MHz ATV and want to help the construction of GB3ZZ, Bristol's proposed 1296MHz f.m. TV repeater, this antenna is just the job for you.

Manufactured exclusively for the Bristol FMTV Group, this 18-element Yagi provides a compact and inexpensive "starter" or portable antenna for ATV enthusiasts.

The antenna is supplied assembled, needing only one screw to fix the rear reflector element.

According to the details sent to me by the Group the gain is about 10dB with an s.w.r. of 1.5 across the band. Length is 920mm and it weighs in at 300g. The clamp supplied fits masts up to 55mm diameter and a waterproof terminal box is fitted.

At a cost of £12.50 collected or £14.75 posted to a UK address, all proceeds after manufacturing costs have been deducted, will go to Group funds. Group members can have a 20 per cent discount.

Orders to **Bristol FMTV Group, 15 Witney Close, Saltford, Bristol BS18 3DX.**

## Kit Cat

Greenweld have just sent me a copy of their latest catalogue. This is a single source for an extensive range of electronic kits covering all abilities and interests.

Amplifiers, pre-amps, transmitters, power supplies and other interesting projects are included together with a range of interfaces for popular computers. Also listed are

kits utilising plug-in breadboards.

For your free copy contact **Greenweld Electronics Ltd., 443 Millbrook Road, Southampton SO1 0HX. Tel: (0703) 772501.**

# R. WITHERS COMMUNICATIONS LTD



Manufacturers, importers and suppliers of world famous communications products

584 HAGLEY ROAD WEST OLDBURY, WARLEY, BIRMINGHAM B68 0BS

021-421 8201/2/3. CELLNET 0860 323056. PRESTEL MBX 214218216 FAX 0214212868

Amateur Radio. Business Radio. Radio Telephones. Sales. Service Accessories and antenna systems.



**YAESU**



**THE TECHNICALLY ORIENTATED  
RADIO COMMUNICATIONS  
SPECIALISTS**

**RWC. We offer the best Available  
Products and Prices. Call now!!**

## YAESU full range stocked

CSC11	£9.50
CSC19	£6.50
FAS14R	£79.00
FBA5	£8.50
FC700	£179.00
FC757AT	£339.00
FEX767-2	£159.00
FIF232C	£69.00
FL2025	£99.00
FNB11	£39.00
FNB2	£24.00
FNB3	£37.50
FNB4	£42.50
FP700	£189.00
FP757GX	£179.00
FP757HD	£229.00
FRA7700	£47.50
FRG8800	£599.00
FRG9600/RWC	£499.00
FRT7700	£52.00
FRV7700A-D	£48.50
FRV8800	£95.00
FT203R-FBA5	£220.00
FT203R-FNB3	£249.00
FT203R-FNB4	£255.00
FT209RH-FBA5	£265.00
FT209RH-FNB3	£289.00
FT209RH-FNB4	£299.00
FT23R	£235.00
FT2700RH	£399.00
FT270RH	£339.00
FT290R-MK1	£369.00
FT290R-MK2	£399.00
FT690R	£299.00
FT703R-FBA5	£249.00
FT703R-FNB3	£279.00
FT703R-FNB4	£285.00
FT709R-FBA5	£275.00
FT709R-FNB4	£319.00
FT726R/2MTR	£979.00
FT727R	£399.00
FT73R	£259.00
FT757GX/RWC	£949.00
FT767GX	£1499.00
FT790R	£379.00
FT980	£1699.00
FVS1	£25.00
LOG BOOK	£2.00
MD1B8	£75.00
MH12A2B	£20.00
MH1B8	£19.25
MMB11	£35.00
NC26	£10.00
NTSC UNIT	£25.00
PA3	£19.50
PA4C	£15.00
PA6	£13.50
QTR24D	£37.50
SAT726	£125.00
SB1	£19.50
SB2	£19.50
SB3	£18.50
SP55	£17.50
YH1	£17.50
YH2	£17.50
YH55	£18.50
YH77	£17.50
YHA15	£7.25
YM24A	£25.00
YM49	£19.50

## ICOM full range stocked

AH7000	£79.00
BC35E	£69.50
BP3	£28.50
BP4	£8.75
BP5	£59.50
CK-70	£6.50
DC1	£16.25
EX243	£56.00
EX257	£39.50
EX310	£42.50
HP1	£32.50
HS10	£19.50
HS10/SB	£19.50
HS15/SB	£49.00
IC-AT150	£299.00
IC-CP1	£6.50
IC-HM9	£20.50
IC-PS15	£149.00
IC-PS25	£99.00
IC-PS30	£335.00
IC-PS35	£189.00
IC-PS55	£169.00
IC-UT16	£27.50
IC02E	£289.00
IC120	£549.00
IC271E	£699.00
IC27E	£379.00
IC28E	£349.00
IC28H	£379.00
IC290D	£499.00
IC2E	£219.00
IC3200E	£525.00
IC471E	£899.00
IC471H	£999.00
IC48E	£439.00
IC4E	£269.00
IC505	£425.00
IC735	£899.00
IC745E	£799.00
IC751E	£1399.00
IC04E	£279.00
ICR7000E	£925.00
ICR71E	£799.00
LC11/14	£8.99
LC12/3	£6.50
MICRO-2E	£252.50
RC11	£59.00
RC12	£59.00
SM6	£42.50
SP4	£25.00

## KENPRO UK Distributor

KCS200	£16.50
KT200EE/DCP	£159.00
KT200EE/NC/CHR	£179.00
KT220EE/NC/CHR	£249.99
KT220EE/DCP	£229.99
KT400EE/NC/CHR	£229.00
KT400EE/DCP	£199.00
KTBA	£9.00
KTBA/2	£9.00
KTBC	£7.50
KTBM	£5.50
KTBP	£25.00
KTBP(H)	£47.50
KTLC	£9.95
KTLC/2	£10.50
KTPA	£16.50
KTSM1	£22.95

**SEE YOU AT NEC '87  
STAND E7-E9 FOR THE  
BEST BARGAINS AND THE  
LATEST EXCITING PRODUCTS!**

## RAYCOM PRODUCTS Exclusive Distributor

1/1 G5RV multi band ant	£14.95
1/2 G5RV multi band ant	£13.95
1/4 WAVE 259 2m whip assy	£2.99
1303-PSU 3-5A psu	£19.25
1305-PSU 5-7A psu	£28.50
1308/M-PSU 8-10A psu	£45.00
1312-PSU 10-12A psu	£59.00
2MTR HB9CV 2E directional ant	£8.50
7.1MHZ TRAPS HF amateur band	£8.95
70CM HB9CV 2E directional ant	£6.50
757 MODKIT See display ad	£20.00
DAV175 6E Discone	£17.50
DISCONE 16E 60-400MHz	£27.50
FBX-RWC MOD See display ad	£22.50
GP900/BASE 800-950MHz ant	£19.50
LCL/DNT MOD CB-10m FM conversion	£14.95
SWR-7000 Raycom 1.6-160MHz	£16.50
TRAP-DIPOLE	£29.95
VHF-DIPOLE	£12.50
V15F-145	£39.50
V25F-145	£48.50
V35L-145	£59.50
V45F-145	£62.50
V15L-145	£49.50

SEE  
DISPLAY AD  
(State Frequency Required)

## SPECIAL OFFERS while stocks last

YAESU FT209RH FNB4 5W 2MTR H/HELD	£275.00
YAESU FT690R 2.5W 6MTR MULTIMODE	£299.00
ICOM IC271E 25W 2MTR M/MODE BASE	£699.00
ALINCO ALM203E 3W 2MTR HANDHELD	£249.00
ALINCO ALR206E 25W 2MTR MOBILE	£259.00
KENPRO KT220EE LCD 5W 2MTR H/HELD	£249.00
KENPRO KT400EE 3W 70CM H/HELD (IC4E)	£199.00
REGENCY HX850 MINI H/HELD SCANNER	£239.00
TRIO TH21E MINI 2W 2MTR H/HELD	£169.00
CTE1600 3W 2MTR HANDHELD (IC2E)	£159.00

## NEW MODELS

**Call for best prices, NOW!**

ICOM IC275E 25W 2MTR BASE STATION  
ICOM MICRO 2E MINI HANDHELD  
YAESU FT767 ALL BAND HF/V-UHF BASE  
YAESU FT727 DUAL BAND 5W H/HELD  
YAESU FT290R/2 2.5W 2MTR MULTIMODE  
YAESU FT23 2MTR 5W MINI H/HELD  
YAESU FT73 70CM 5W MINI H/HELD  
YAESU FRG9600 MK3 HF/UHF SCANNER  
REGENCY HX850 MINI H/HELD SCANNER  
BJ200 HANDHELD AM/FM SCANNER

**Tel: 021 421 8201 (24hr answerphone)**

**Telex: 334303 G TXAGWM**





# RWC PRESENT A WORLD FIRST! YAESU FRG9600/RWC MK3/HF-UHF 100KHz-950MHz.

We now offer the NEW FRG9600's in two versions:

Option [1]: FRG9600 Mk2 series 2 60-950MHz 'N' Connector. @ £519.00 Plus £5.00 carriage, or we will modify a standard unit for £40.00 inc. VAT (Inc £5.00) return insured carriage.

Option [2]: FRG9600 Mk3 100KHz-950MHz HF switchable, actual frequency readout, (no external units) 'N' connector for V-UHF and SO239 fitted for HF in. £625.00 Plus £5.00 carriage, or we will modify an existing unit for £129.50 inc return carriage, which will have the 950MHz extended coverage fitted at the same time. (existing MK2 owners can have the New HF mod fitted for £99.00 inc. return carriage).

All modifications are Fully Guaranteed for twelve months from date of purchase/modification providing our modifications seals are unbroken.

\*OPTIONS: We are able to supply RWC modified Video units (PAL, 6MHz I.F.) @ £27.50 (fitted free during modification) and PA4 AC-DC Power units plus CAT interface units, Etc.

**NOW WITH  
HF COVERAGE**



## OTHER PRODUCTS

ADONIS AM303G	£53.00
ADONIS AM503G	£59.00
AKD WA1	£24.95
ALINCO ALM-203E	£269.00
ALINCO ALR-206E	£249.00
ALINCO EDC1	£29.00
ALINCO EDH-25	£15.00
ALINCO EMS-20	£22.00
ALINCO ESC-3	£16.00
AOI-MIC DM300	£6.50
AOI-MIC DM301N	£7.50
ARM-ANT MULTIP-6	£38.50
BEARCAT BC100XL	£229.00
BEARCAT BC175XL	£260.00
BEARCAT DX1000	£379.00
CAPCO ACK-1	£5.30
CAPCO B1-1	£15.50
CAPCO B4-1	£15.50
CAPCO SPC3000D	£325.00
CAPCO SPC3000	£225.00
CRITON LS88B	£6.60
CTE1600	£179.00
DAIWA SA450M	£17.50
DAIWA SA450N	£23.75
DATONG 4096	£38.90
DATONG AD270	£51.75
DATONG AD370	£69.00
DATONG ANF	£57.85
DATONG D70	£56.35
DATONG FL2	£89.70
DATONG FL3	£129.37
DNT M40FM	£59.00
DNT M40FM-RWC	£49.95
DRAE 12A PSU	£86.50
DRAE 24A PSU	£125.00
DRAE 3W COAX SW	£15.40
DRAE 3W COAX SW	£19.90
DRAE WAVEMETER	£27.50
FDK BJ200	£269.00
FDK J25X	£225.00
FDK J50XX	£489.00
GAMMA 2MTR-S-JIM	£12.50
GREENPAR N PLUG RG58	£2.75
GREENPAR N PLUG RG58	£2.99
GREENPAR BNC PLUG	£1.75
HI-MOUND HK702	£42.50
HI-MOUND HK704	£28.50
HI-MOUND HK708	£21.50
HI-MOUND MK703	£37.15
HI-MOUND MK705	£32.20
HI-Q COIL	£5.50
HQXIN 70N20X	£37.75
HQXIN 70N2M	£24.95
HQXIN 70N2V	£47.00
HQXIN HS-358	£33.73
HQXIN HS-770	£22.95
HQXIN HS-78F	£21.15
HQXIN HS-88F	£24.10
HQXIN SMC15SE	£16.85
JAYBEAM BXY-2M	£43.00
JAYBEAM LR1-2M	£35.70
JAYBEAM LW10-2M	£28.23
JAYBEAM MBM48	£42.45
JAYBEAM PBM14-2M	£46.50
JAYBEAM Q4-2M	£35.50
JAYBEAM TB1MK3	£99.00
JAYBEAM TB2MK3	£199.00
JAYBEAM TB3MK3	£299.00
JAYBEAM VR3MK3	£69.96
KING ROTATOR2	£47.50
KOPEK AR1002	£49.95
M-MODULES MMG114V	£29.95
M-MODULES MML144/100HS	£159.85
M-MODULES MML144/100LS	£169.95
M-MODULES MML144/100S	£149.95
M-MODULES MML144/200S	£334.65
M-MODULES MML144/30LS	£94.30
M-MODULES MML432/100	£334.65
M-MODULES MML432/30L	£169.00
M-MODULES MML432/50	£149.50
MuTek BBA500u	£37.50
REGENCY HX2000E	£279.00
REGENCY HX850E	£259.00
REGENCY MX5000	£329.00
REGENCY MX7000	£399.00
REGENCY MX8000/AOR2002	£485.00
REVCO 20456	£69.00
REVCO REVCON	£29.95
SAGANT S-ROD2	£11.95
SAGANT S-ROD7	£11.96
SAGANT SLIM2	£8.95
SAGANT SLIM7	£9.95
SUN PL259/6	£0.75
SUN PL259/9	£0.75
SUN-ANT KG208SE10	£14.50
SUN-ANT KG208SE2	£16.50
SUN-ANT KG209SE2	£15.95
SUN-ANT KG309SE2	£15.50
SUN-ANT SGIM235	£15.00
SUN-ANT SO239-CGM	£4.75
TONNA 20089N	£33.50
TONNA 20199	£40.25
TONNA 20624	£20.25
TONNA 20809N	£30.86
TONNA 20813N	£46.00
TONNA 20817N	£61.53
TONNA 20818N	£31.85
TONNA 20921	£45.62
TONNA 20922	£44.57
TONO 2M-40G	£69.00
TONO 2M-90G	£139.00
TOSHIBA 128Y7A	£5.65
TOSHIBA 6K06	£8.50
TOSHIBA BSJ6C	£7.90
TOYO SWR171	£14.50
WELZ AC38M	£85.00
WELZ SP10X	£42.95
WELZ SP122	£98.00
WELZ SP220	£99.96
WELZ SP825	£189.00

**EXPORT DEALER  
ENQUIRIES INVITED**

## NEW STORNO CQM713/P3 2MTR MODIFICATION KIT

This new kit of parts enables conversion of the Storno 55ch Radiophone to the amateur 2mtr band. The end result is a 80ch 25KHz steps 25W transceiver with repeater shift and option of local or remote control BCD or Binary channels. The unit renders the ideal basis for a cost-effective mobile or Packet Radio transceiver or even Raynet emergency repeater! The kit comprises of two pcbs 2x adder chips, components (excluding external switches and pots) and 2x 7th overtone crystals and instructions and should present the average amateur with some constructional experience the minimum of difficulty. Why not have a go! Many parts available. Storno Mod Kit. £29.50 Inc post.

Again we improve a fine HF transceiver by fitting our FAST TUNE FACILITY. The mod is "free of charge" at normal retail price, or send your rig, carriage paid and payment of £34.50 and we'll fit it for you. Can be fitted by experienced constructors. Built and tested kit at £20 Inc p&p.

FT-757 GX-RWC £925.00 with MOD fitted carriage inc.



**INSIST THAT YOUR  
NEW 757 HAS OUR  
"FAST TUNE" MOD....**



## NEW UK MADE New Raycom 13.8 VDC Power Units (All AC 240V).

UK MADE	13.8V 12 Amp Max	10A 12A MAX	13.8V 5 Amp Max	13.8V 3 Amp Max
1312	£59.00	£59.00	£28.50	£19.25
1308M	£59.00	£45.00	£28.50	£19.25
1305	£59.00	£45.00	£28.50	£19.25
1303	£59.00	£45.00	£28.50	£19.25

Please ask for our colour brochure



Model shown is 1308M  
13.8V 6a metered  
**BUILT & TESTED**




## RAYCOM RF AMPLIFIERS

All 1-3 Watts input SSB & FM options (FM only can be used for CW)  
VHF UNITS (144-175MHz) Special models & boards available to order  
BUILT AND TESTED

	ORDER CODE	PRICE
45 FM/CW	V15F	£62.30
35 FM/CW-SSB/AM	V35L	£59.50
25 FM/CW	V25F	£48.50
15 FM/CW-SSB/AM	V15L	£49.50
15 FM-CW	V15F	£39.50

Post and Packing £2.50

All units use Mitsubishi or Toshiba power modules.



**UK  
MADE**

## 10 Mtr MOD BOARD - Remember who did it first!

This is a complete modification board designed to fit all CB radios that incorporate a modification board designed to fit all CB radios that have the SANYO LC7137 series of synth chip. The unit comprises of a small pcb with six microchips and fits almost all current legal (CB27/81) radios. The unit is supplied with full fitting instructions and can be fitted easily by most enthusiasts, with the current upsurge in interest in this band demand has been high as this means that over 90% of current CB radios can now be used on 10mtr amateur band.

PRICE £22.50 x £1.00 Post and packing (built & tested).

Works excellent in Cybernet, Benetton, Lowe TX40G etc. Check if your radio has the Sanyo chip fitted. We will fit unit for you £40.00 inclusive P & P.

\* Only suitable for experienced constructors.

KIT OF PARTS AVAILABLE £17.50 x £1 P & P

\*Only available from FRG9600 date 13/05/85 for full circuit description etc.



## Better and "extended Range mods" (RX only for UK market) available for the following Models. ONLY available at RWC.

YAESU FT23	ICOM MICRO 2E
YAESU FT73	ALINCO ALM203E
ICOM IC28E/H	KENPRO KT220EE
ICOM IC48E	REVCO RS2000E

Most of these latest models can be modified for up to 20MHz, extended coverage - call now for details some we modify free.

Remember who did it First!

## SCANNING RECEIVERS

We stock the most extensive range of HF to UHF scanning receivers available in the UK. We also stock matching antennas and accessories and offer generous part exchange on new and used models. Why not take this opportunity to upgrade now?

## UNIDEN-BEARCAT UK Distributor

BC 100XL VHF-UHF/Held C/W Nicads	£229.00
BC 175XL VHF-UHF Desktop C/W PSU	£209.00
DX1000 Digital HF Receiver 10kHz-30MHz	£379.00

Please ask for a colour brochure

UK Mainland POST/CARRIAGE Transceivers/Receivers/mobiles: £7.50, Handhelds £5.00, Accessories £2.50-£5.00, DATAPOST £10.00, Next Day Carrier £12.50. Or at Cost. Send £1.00 for Raycom Product catalogue (£2.00 refundable over £100.00 Cat Orders) Leaflets/Specifications available on all Main lines. Also Free Bi-Weekly Used list.

## EXPORT & DEALER ENQUIRIES WELCOME

We supply Worldwide, Overseas customers may order at 10% Inc Post. Send Bankers cheque in £ Sterling AIR-MAIL EXTRA

## RWC AGENTS

Northern Ireland: Tom & Norma Greer. Tel. 0231-25-045

North-West: DW Electronics. Tel. 051-320-2550

East-Midlands: AJH Electronics, Rugby. Tel. 0785-76473

If you are a Radio-Radio Electronics Dealer Contact Martin, Andy or Ray NOW!

Isle of Man: Alan St Electrical. Tel. 0624-75779  
South-West: Agnitors Radio Centre. Tel. 08053-200

Ask your local dealer or call us direct

# Kit Construction— It's Easy

*If you have just passed the RAE and are looking for a cheap way of getting on 144MHz, Elaine Richards G4LFM looks at the Spectrum Communications answer for you.*

## Spectrum Communications FTX-201 & FM-1000

The two kits reviewed here are the FTX-201 Foundation transmitter and the FM-1000 Frequency Modulator from Spectrum Communications. As the name implies the Foundation transmitter has been designed as a simple no frills, low-cost unit with an r.f. output of up to 0.5W. Simplicity is assured by using a crystal oscillator followed by 5 stages of r.f. amplification. The techniques used are all fairly standard and hence easy to set-up and fault, if necessary.

## Construction

The review kit was a pre-production prototype and the p.c.b. layout and components list weren't quite a typical Spectrum Communications kit. By the time you buy a kit all should be OK on the production versions.

The components supplied were of good quality and adequate for the task. All inductors were supplied ready wound and were a mixture of Japanese and Spectrum's own manufacture. The p.c.b. was good quality single sided glass fibre and all holes were of the correct size and spacing.

Construction time for an experienced constructor is about 3 hours. The supplied instructions were adequate for an inexperienced constructor but the beginner may need some help.

## Foundation FTX-201 Circuit Description

The crystal oscillator is conventional Colpitts circuit using a parallel mode crystal operating at its fundamental frequency (12-12.1667MHz).

Frequency (phase actually) modulation is achieved by closely coupling the modulator transistor to the oscillator to create a Waikato modulator. Provision has been made on the p.c.b. for switching up to 6 different crystals.

The 12MHz output is applied to a common emitter doubler to 24MHz. The residual 12MHz is filtered out by a second 24MHz tuned circuit. Next stage is a common base tripler to 72MHz the output of which is again filtered to attenuate any remaining 12 and 24MHz components. The final frequency changing stage is a common base doubler to 144MHz with a double tuned output to reduce out of band signals.

The final two stages are tuned common emitter amplifiers producing 200mW and 800mW respectively in the tested kit. In line with good r.f. practice the final r.f. output is passed via a two-stage low-pass filter to reduce harmonic output to better than 50dB below the carrier.

## FM-1000 Modulator Circuit Description

This unit is a simple microphone amplifier and speech processor. Gain is provided by a 741 op-amp and limiting is achieved with a simple diode clipping circuit. The modulator interfaces directly with the FTX-201 and should be capable of operation with the majority of low impedance communication microphones.

## General

The basic FTX-201 kit contains no microphone amplifier or antenna switching but these items are available separately from Spectrum. The Kit comes supplied with an S20 crystal but others are easily obtained as standard 12MHz parallel resonance units are required. To calculate the required crystal frequency simply divide the final 145MHz frequency by 12.

## Uses


With a matching receiver and power amplifier this unit would be ideal for the mobile operator who only needs one or two repeater channels and doesn't need the expense of a synthesised rig. Another potential use for such a combination would be as a dedicated Packet Radio rig again with perhaps one or two channels. All in all a good simple design which, if constructed carefully, would be ideal for the practically minded newcomer.

## Setting-up

The supplied setting-up instructions for the FTX-201 were very detailed and very cleverly avoided using any test equipment that would not normally be available in the shack. The only items required are a d.c. voltmeter, d.c. ammeter (up to about 200mA), s.w.r./power meter and a dummy load. Each stage is peaked up in turn and then finally trimmed for maximum output. The setting-up instructions included typical measurement values for each stage of alignment which is a great help in the event of a problem. The output power on the review sample was 800mW throughout the 144MHz band.

## On the Air

When driven with a low impedance communications microphone and the FM-1000 mic amplifier and clipper the modulation level and quality was very good. The only problem on the original set-up was a tendency to instability which was due to poor layout on the author's part! It is very important to ensure that the mic amplifier and mic leads are well screened to prevent any r.f. getting back into the system. **PW**

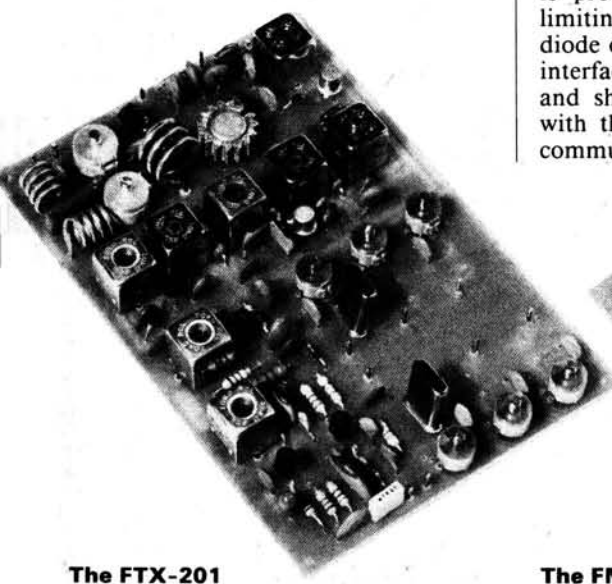

The FTX-201



The FM-1000



# The Vin-Plonk Special

*The Vin-Plonk Special is a simple 14MHz band transmit/receive antenna based on the principle of "electrovineology". As this word does not appear in 1987 dictionaries, it can be defined as "the science of using wine bottles as indoor and portable mini-tower transmit/receive erections" says Richard Q. Maris G2BZQ.*

It is a matter of fact; good, bad or indifferent—depending on your point of view—that if you have £X00 then you can go out and buy a "super duper commercial h.f. antenna" and erect it in your garden. For a further £X000 a black box h.f. transceiver can be attached to the antenna; and if you "press the key" or "switch on the mic" then you will work the world. This goes on for a year or two. You have done the lot! Bearing in mind that amateur radio is a hobby, then what can you do next? How about a bit of experimentation with antennas?

The *ARRL Antenna Book* states that a h.f. TX can be used to load up just about anything, as an antenna, such as bedsprings, gutters, downpipes, tin roofs, metal flagpoles, TV antennas, wire reinforced plastics clothes line, wire fences and even a tree trunk (if you have one). Unfortunately they then rather smartly proceed to the next chapter—without giving very many actual details as to how this act should be performed!

The Vin-Plonk is a **fun project!** It works! It uses:

- 1½ litre wine bottle (empty)
- coffee jar
- biscuit tin lid
- wire
- piece of wood
- length of coaxial feeder
- junk box variable capacitor with knob.

Some (many?) readers will say "the man is crazy—he must be joking!"

Believe it, or not, it resonates excellently as an indoor 14MHz band RX antenna, and it can also be loaded with the transmitter. The QSO, which

proved the latter point was with a DJ on 14MHz c.w., during the middle of one morning. The distance? Well, 800/950km! Maybe not a DX antenna, but it does prove that just about anything can be "TX loaded" with a bit of ingenuity. Incidentally, for some time the author has had his beady eye on a large metal-framed window 4m x 1.5m.

The circuit is shown in Fig. 1a. It consists of L1 wound around the bottle, L2 is the loading/matching coil around the coffee jar with a 150pF air-spaced receiver type variable capacitor of unknown parentage, it could easily be 100pF. At the top is a "top hat", which is a biscuit tin lid.

Construction is shown in Fig. 1b. a 180mm diameter biscuit tin lid is glued to the blunt end of the wine bottle, the "instant" type glue is best. Onto the bottle body, as shown, is wound 11m of 1 x 0.6 pvc covered wire, but no doubt any thin pvc covered wire or flex would do. The wine bottle "body" is 100m diameter. Solder the top end of L1 to the top hat.

The bottle is then glued to a 60mm coffee jar, as shown. This is a tricky job as the glue sets instantly so that you don't get a second chance. The prototype looks a bit like the Leaning Tower of Pisa, as the glue set while still doing the vertical alignment of the bottle and coffee jar!

Inductor L2 is 3½ turns of 20 s.w.g. tinned copper wire, spaced about 6mm between turns, with the wire anchored in place with glue.

The base of the unit is a piece of 25mm thick wood. The coffee jar/bottle contraption is glued to one end of

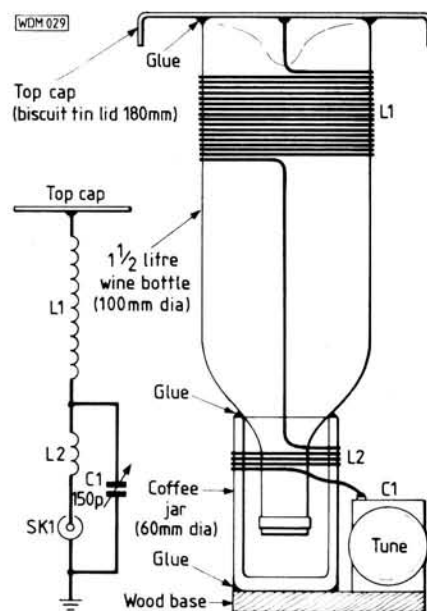


Fig. 1a

Fig. 1b

the base. The 150pF capacitor is mounted down the other end on a small bracket. Though the coaxial socket is shown, in the circuit, the author dispensed with this and went straight into a length of coaxial feedline, which was cleated to the base board.

Tuning? If you have a transceiver, then resonate C1 for maximum signal on receive, and it does not have to be adjusted on transmit. At least, that's what happened to the author.


A few simple connections, with bits of wire and a soldering iron and you have the Vin-Plonk Special! And the thing didn't cost anything—it was all lying around somewhere in the house or garage.

PW

## HAVING DIFFICULTY GETTING YOUR COPY OF PRACTICAL WIRELESS?

Then place a regular order with your newsagent  
**NOW!**

Distributed by Comag

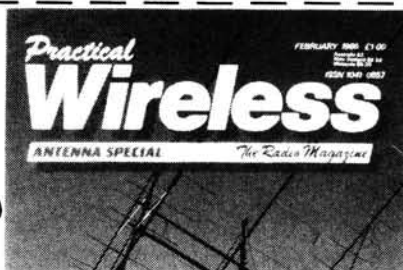

Dear Newsagent,  
please reserve/deliver  
my monthly copy of  
PRACTICAL WIRELESS

Name \_\_\_\_\_

Address \_\_\_\_\_

Signed \_\_\_\_\_

# The PW "Blandford" Receive Converter PART 2

In this, the final part, Ray Howgego BSc G4DTC describes the construction

## Construction and Layout

Before construction is undertaken, some thought should be given to the final layout and enclosure of the separate modules. The oscillator module, and possibly the u.h.f. tuner will be mounted in diecast or heavy gauge tinplate boxes, the tuner being rigidly bolted to the mainframe. The mixer module and TV rejection filter need not be additionally screened, but on no account should they be placed within the oscillator box. The three v.h.f. amplifiers may be constructed on a single sheet of plain copper-clad board, or as three separate modules, and are best bolted directly to the external enclosure via the variable capacitor shafts which then protrude through the front panel. Sufficient space should be allowed for the intended reduction drive of the main tuning control and for its calibrated scale, which will need to have a diameter of at least 200mm if it is to be marked with any accuracy. It might be significant to mention here that some u.h.f. tuners, notably the Mullard type, require rotation through slightly more than 180°. The front panel will also need to take the gain control R13 and the amplifier selector switch S1. If the mains power supply is to be enclosed within the finished unit, the transformer is best mounted as remotely as possible from the u.h.f. TV tuner to prevent induced 50Hz currents and possible transformer vibration which can produce an f.m. ripple on all received signals.

To facilitate adjustment of the oscillator module the r.f. "sniffer" shown in

Fig. 2.1 is recommended and may be quickly soldered up on a small tagstrip or piece of Veroboard. The meter may be any sensitive analogue movement of about 200µA f.s.d., or a multimeter on its most sensitive voltage range. The loop at the end of the twisted flex should be held coaxially with the inductance in the circuit under test and preferably not so close as to detune it. Readings of about 100µA or a few tenths of a volt will generally be registered.

## Oscillator Construction

If you intend to make your own p.c.b., note that in order to stop short-circuits occurring between component legs and ground, all holes on the ground-plane side of the p.c.b. should,


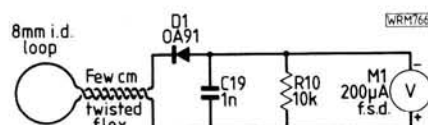


Fig. 2.1: Circuit diagram of r.f. alignment aid

after etching, be lightly countersunk with a suitable twist drill. Holes taking inductors and trimmers need to be slightly enlarged.

Next construct a small rectangular enclosure measuring 85 × 18mm, with a depth of about 18mm, it may be pre-formed out of tinplate salvaged from a used soup can. The base of the enclosure should be soldered directly to the p.c.b. ground-plane. A hole will need to be drilled in the enclosure 9mm above the ground-plane to take the connection to L5 and another, on the opposite side, to accommodate the coaxial cable

© PW Publishing Ltd 1987 WR227a

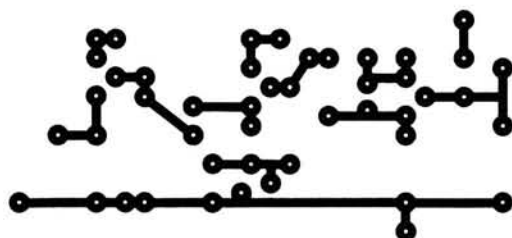

Tr1 BSX26  
Tr2 2N2369  
Tr3 2N3866


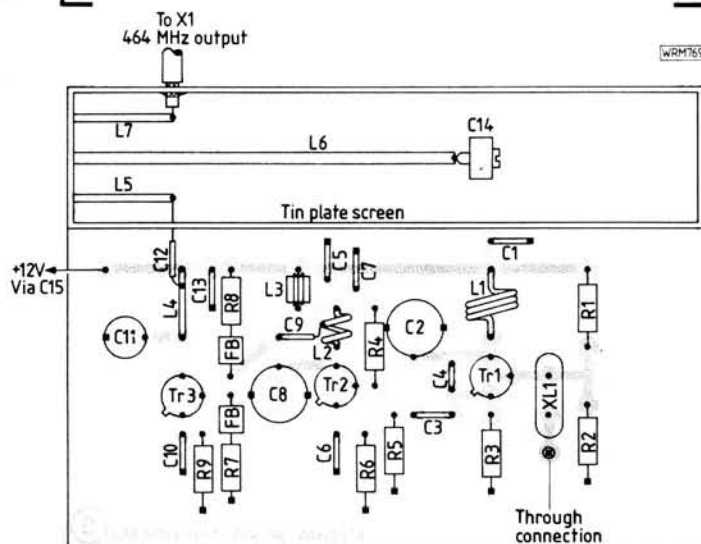


Fig. 2.2: Double-sided track pattern (shown full size) and component overlay of oscillator module



which connects to L7. A third hole is required at the far end to facilitate the insertion of a trimming tool for adjustment of C14.

While working in this area, the three short lengths of heavy gauge wire which form L5, L6 and L7 may be soldered into position, see Table 2 and Fig. 2.3 for full details. The trimmer C14 is soldered with its rotor plate to the ground-plane and is mounted vertically so that its stator plate tag supports the end of L6.

All other components may now be inserted as indicated in Fig. 2.2. Due to the rather high density of components, it is wiser to solder devices in order of decreasing size, trimmers first, then inductors, as smaller components might need to be routed around them. All components having a return to the "earthy" side of the circuit are soldered directly to the ground-plane with the shortest possible lead length. This applies, in particular, to all ceramic plate decoupling capacitors, which should be soldered right up against the capacitor body. These very small capacitors disintegrate rather easily under physical strain, particularly when hot, and their lead should be pre-formed before soldering. There is only one link between opposite sides of the board, that returning the crystal to the ground-plane. Don't forget the two ferrite beads on R8 and R7, also ensure that the rotor plate of the trimmer C11 is soldered to ground. Do not be too concerned about the exact dimensions of the inductors; the large tuning range of the trimmers will accommodate a wide margin of error.

### Commissioning the Oscillator

Connect a stable 12 volt supply between the positive rail and the ground-plane and adjust the trimmers so that their plates are fully unmeshed.

TABLE 2: COIL WINDING DATA				
Coil No	Turns	Wire s.w.g.	Coil Form Dia (mm)	Remarks
L1	3	22 e.c.w.	7	Close wound self supporting
L2	2	22 e.c.w.	4	Extend to 5mm tapped at $\frac{1}{2}$ turn
L3	3	26 e.c.w.	—	Wound on ferrite bead
L4	—	20 t.c.w.	—	5 x 9mm loop, see Fig. 2.3
L5	—	20 t.c.w.	—	13mm long height as L6, see Fig. 2.3
L6	—	16 t.c.w.	—	50mm long 9mm above ground plane supported by C14, see Fig. 2.3
L7	—	20 t.c.w.	—	13mm long height as L6, see Fig. 2.3
L8-10	3	24 e.c.w.	3	Spaced wire thickness
L11	—	—	—	6-8µH inductor 34-48689 <sup>(2)</sup>
L12	—	— t.c.w.	—	See Table 1

e.c.w. = enamelled copper wire, t.c.w. = tinned copper wire

Place the loop of the r.f. sniffer close to L1 and very slowly adjust trimmer C2 until, when its plates are about one third meshed, a sharp increase in meter deflection is observed. Move the loop as far as possible from L1 consistent with obtaining a usable meter reading and re-adjust C2 for maximum deflection. This highly critical tuning point coincides with fifth-overtone oscillation, a second, much broader, deflection will be observed when C2 is at nearly maximum capacitance; this is the third overtone and must be rejected. Switch the supply voltage on and off several times to ensure that the oscillator starts up each time; if not, de-tune C2 slightly until it does. If for some reason, fifth overtone operation cannot be excited, the components C3 and R1 may need to be selected on test, starting with the values stated and then deviating either side of this with the next preferred values.

Now introduce the loop of the sniffer to L2 and slowly increase the capacitance of C8. One or two weak resonance might be identified followed by a third which gives a substantial meter deflection, this coincides with 232MHz operation. It should not be possible to accidentally set this stage to 116MHz as it falls outside the tuning range of C8. Next move the sniffer loop close to L4, C11 being adjusted

until a similarly large meter deflection is obtained. If two resonant peaks can be tuned with C11, the one corresponding to the higher capacitance setting should be accepted. Since this stage cannot be tuned to 232MHz, the correct frequency must have been selected. If the required resonance occurs when C11 is set at maximum or minimum capacitance, the dimensions of L4 should be decreased or increased respectively.

Next, solder the required length of coaxial cable to the coupling inductor L7, as indicated in Fig. 2.3, then place the sniffer loop inside the trough enclosure. Tune C14 for maximum meter deflection; this should require C14 to be set at about half maximum capacitance. With the loop still within the enclosure, all trimmers can then be adjusted slightly and peaked to give a maximum meter deflection. A volt-meter across R9 should show about 0.7V, indicating a d.c. input to Tr3 of around 120mW, and both transistors, Tr2 and Tr3, should run slightly warm to the touch.

The module may now be installed in its box. If a u.h.f. TV receiver is available, a very strong carrier should be observed just below channel 21 (464MHz), with the receiver lightly coupled to the oscillator module's output. Trimmers C8, C11 and C14 may be given a final tweak to produce maximum darkening of the raster, there should be no patterning on the raster. A carrier will also be observed at 696MHz (near channel 49) but should be comparatively weak, other 116MHz harmonics should be barely discernable.


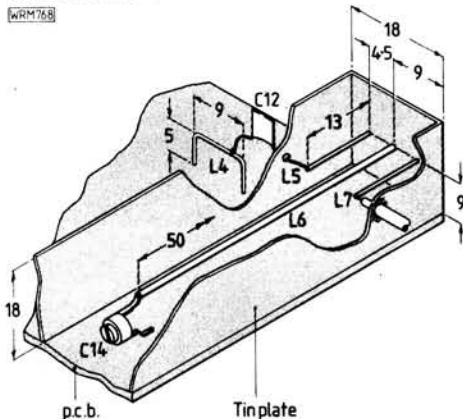


Fig. 2.3: Plan of trough-line filter including dimensions for linear inductors L4-7

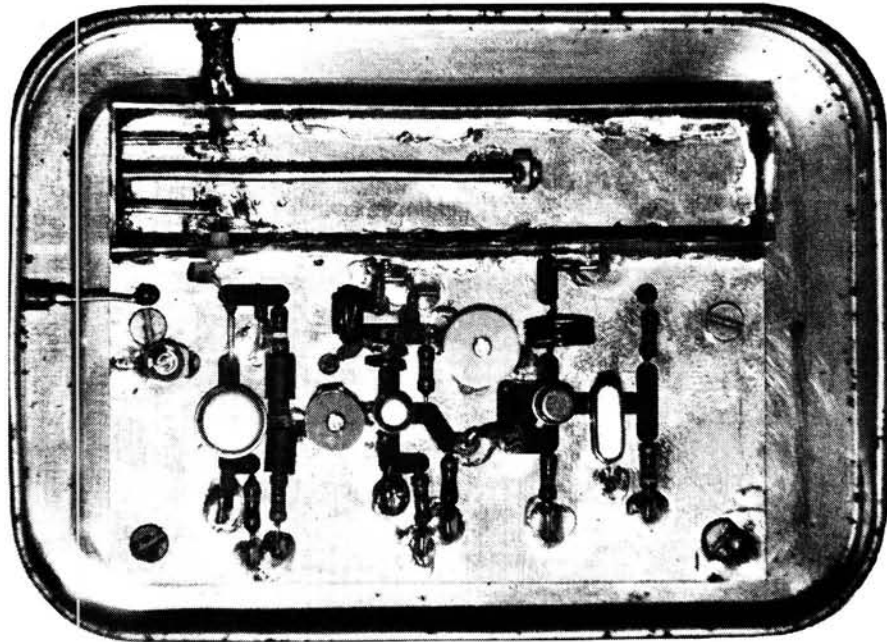

TV Tuner

The u.h.f. TV tuner should be considered next. If a tuner is to be removed from a redundant receiver, a note of its connections should be made before removal. Details of the Mullard four-button type tuner are shown in Fig. 2.4. There are basically only six connections: antenna, i.f. output (both coaxial), two supply lines, and the a.g.c. connection discussed earlier. The tuner should be stripped of any switch mechanisms and its side cover removed for inspection. A coaxial lead is then connected from the i.f. output directly to the antenna socket of an h.f. receiver tuned to 29.5MHz, not forgetting the isolating capacitor C23 which prevents any d.c. potential at the i.f. output being grounded via the receiver. The a.g.c. connection will require a fixed d.c. bias for maximum gain, best derived from a potential divider network across the 12 volt supply rail. The network shown in Fig. 2.4 will deliver the 3 volts required to bias the r.f. amplifier, the overall gain of the converter is controlled from R13. Other types of tuner will require some experimentation in this area.

When a 12 volt supply is connected

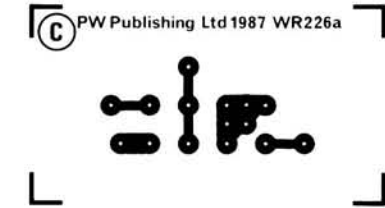
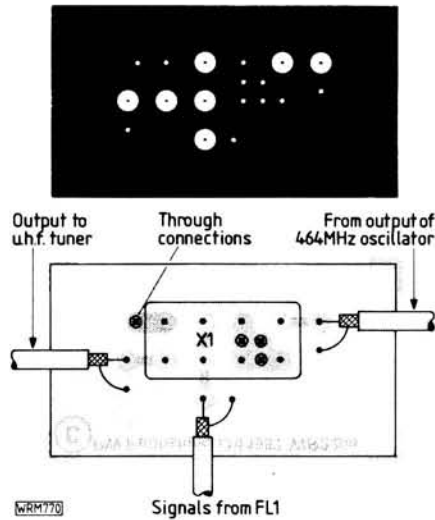


Fig. 2.5: Double-sided track pattern (shown full size) and component overlay of mixer module

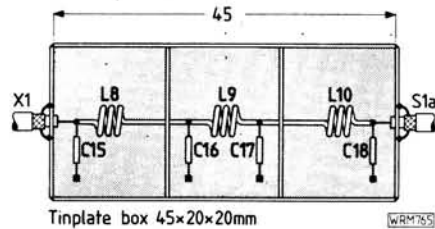


Fig. 2.6: Constructional details of FL1, 420MHz low pass filter

to the tuner, a higher noise level should emanate from the receiver and, by slowly tuning the unit, local TV signals should be heard. The small i.f. coil, normally set around 32MHz, should then be adjusted by moving its core into the coil former until a peak in the noise is heard. This is usually within the tuning range of the coil; if not, a small capacitor (a few picofarads) can be connected across the coil.

The 464MHz oscillator must now be fired up and the tuner checked to ensure that it will tune this frequency with its variable capacitor sections fully meshed. If this is not possible, the widest rotor plates in the oscillator compartment of the tuner should be carefully, and very slightly, bent inwards to increase the maximum capacitance. It is inadvisable to use the oscillator trimmer because increasing its capacitance will severely restrict the upper frequency limit. Any modification to the tuning capacitor should be reproduced as closely as possible in all other capacitor sections so that tracking is maintained. With the side cover replaced, the oscillator trimmer should be adjusted so that the tuner just tunes the 464MHz carrier at its lower frequency limit. Due to the slight change in intermediate frequency, the three remaining trimmers will need to be peaked for maximum noise, preferably near the upper frequency limit where system gain will be at its lowest. Tracking between circuits is usually excellent and no dead spots should be apparent when the unit is swept across the band. The matching between the tuner output and the receiver input might be improved, with the inclusion of capacitor Cx, typically 100–200pF, as shown in Fig. 2.4.

Mixer and Filter Construction

The mixer module and TV rejection filter FL1 are constructed as separate units, their installation, whether with-



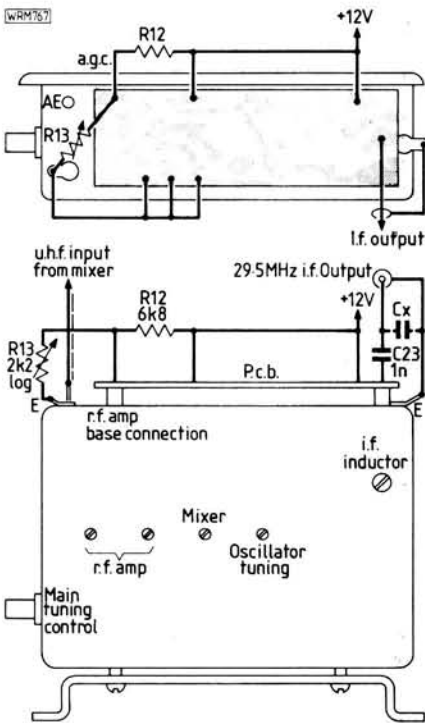


Fig. 2.4: External connections to u.h.f. TV tuner


in a box containing the tuner or as outboard units bolted to the main-frame, being left to the discretion of the constructor. The mixer itself requires some special attention. You will notice, referring to Fig. 2.5, that there are several unaccounted-for holes drilled around pins 2, 5, 6 and 7. Through these holes are threaded short lengths of wire, which are soldered on both sides of the p.c.b. They provide a non-inductive return to the upper side ground-plane. Any excess solder should be carefully filed down so that when the mixer is installed, it is not raised more than one millimetre or so above the surface of the p.c.b. Take care to insert the mixer correctly; pin 2 lies immediately below the letter M of "MCL". Alternatively, more recent devices may have pin 1 colour-coded. The metal case of the mixer should not



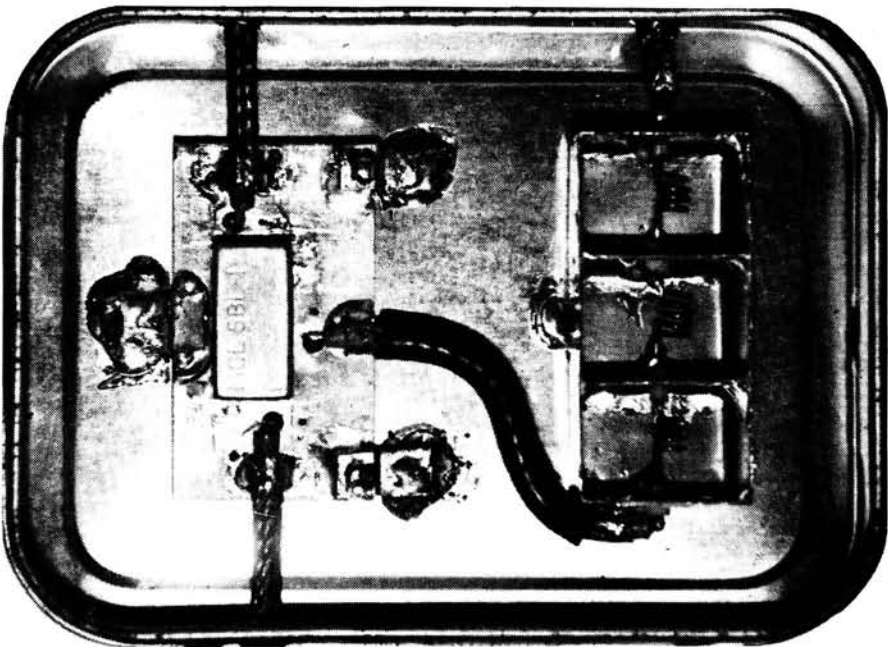

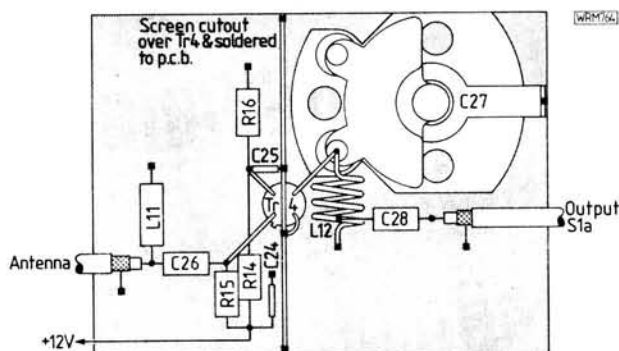

**Fig. 2.7: Component layout of v.h.f. pre-amplifier, one of three (shown full size)**

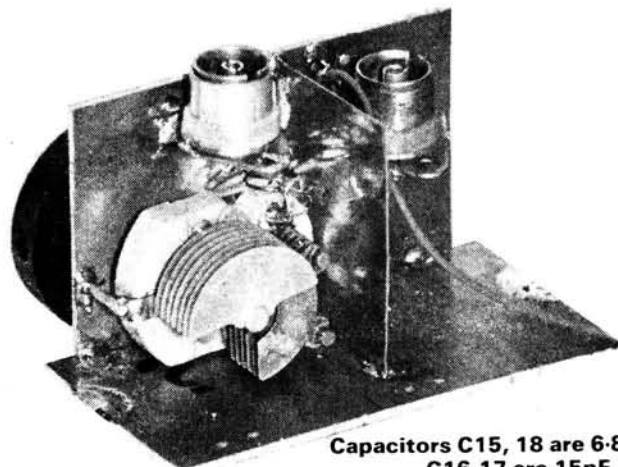

**Capacitors C15, 18 are 6-8pF, and C16,17 are 15pF**

make casual contact with the ground-plane and is best left floating. Coaxial cables from the tuner, filter and oscillator are connected as shown in Fig. 2.5, and should be stripped so as to reveal the barest minimum of unscreened lead.

The TV rejection filter FL1 is constructed in a  $45 \times 20 \times 20$ mm tinplate box. It is divided internally into three sections by two tinplate bulkheads, each being drilled to take a connection from one filter section to another. All the seams of FL1 will need soldering along their entire length. The internal construction, shown in Fig. 2.6, is a job for nimble fingers and some thought should be given to the best plan of attack. The three coils, which should be identical, are wound separately and insulated where they pass through the internal screens. The holes in the screens should be as narrow as possible and capacitor leads kept short.

## Pre-Amplifier Construction

There are three amplifiers to construct, and they can be built separately or together on a single board. All follow the same basic design shown in Fig. 2.7 and components that differ from one band to another are shown in Table 1.

A small tinplate screen with a cut-out at its base just large enough to take the transistor body, is soldered across the ground-plane. All components are supported by their leads on one side of the board. The decoupling capacitor C25 must be soldered directly between the transistor base lead and the screen with virtually no lead length.

Variable air-spaced capacitors are expensive devices, and if other values are to hand it may be more cost-effective to design the amplifiers around them, even if it means constructing a fourth amplifier. Some experimenting with inductors will be

needed to give a small overlap in band coverage: exact reproducibility cannot be guaranteed in such circuits. In the prototype, each amplifier was provided with its own antenna socket, but antenna switching could be incorporated if the constructor is willing to tolerate a small loss. The amplifier cannot be tested until the entire converter has been wired, the objective being then to ensure that at least one of the amplifiers will produce a noise peak at any frequency tuned. Any instability, although none was apparent in the prototype, can be cured by judicious placing of small supplementary screens around the inductors.

## Power Supply


The Mullard tuner recommended for this project is reasonably tolerant of supply voltage changes, shifting by less than  $20\text{kHz/V}$ , which is exceptionally good for a free-running oscillator at such high frequencies. A 7812 regulator provides more than adequate stabilisation and will accept an applied p.d. anywhere between 15V and 30V, allowing the use of any mains transformer having a loaded secondary output of between 11V and 22V r.m.s. If the regulator is bolted directly to the chassis, no further heatsinking will be necessary.

## Testing and Calibration


A main tuning scale of 200mm diameter will allow graduation at 1MHz intervals and will be very nearly linear over the entire spectrum, each MHz occupying approximately  $\frac{1}{2}$  degree on the scale. A reduction drive of 400:1 or better, without backlash, is essential if signals are to be tuned directly on the converter itself. A cord drive, of the type common to most domestic receiver, is recommended, the drum being

mounted on the TV tuner shaft, and can easily be arranged to provide a 40:1 reduction without allowing vibration from the front panel being passed through to the tuner. The cord itself may then be driven by a small epicyclic 10:1 reducer or a second cord drive. Precise details are left to the ingenuity of the constructor.

Although the constructor might eventually invest in a wide-band v.h.f. antenna, a simple horizontal dipole of 3 or 4 metres total length will bring in all of the more obvious signals from 10kHz to 400MHz. It will possess a number of resonances in the v.h.f. band and, while not being over-receptive to signals below 30MHz, is unlikely to cause unmanageable cross-modulation. The antenna should initially be connected to the low frequency antenna socket, that is, directly into the mixer without amplification. If each module has been tested after construc-

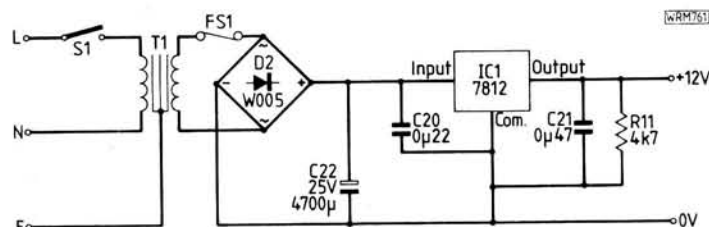

**Fig. 2.8: Circuit diagram of p.s.u.**

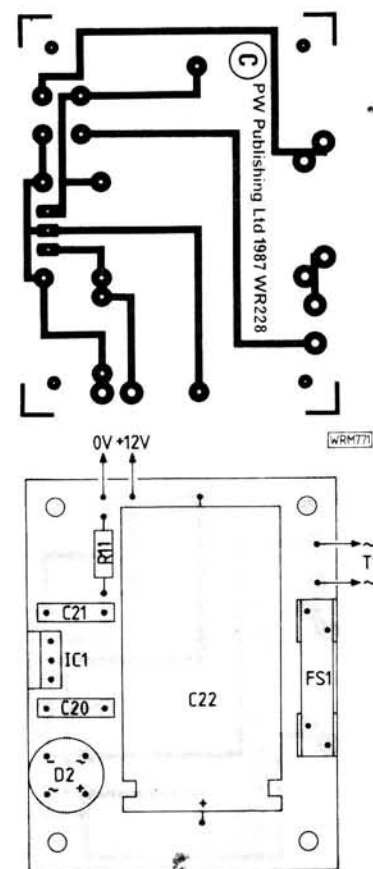


**Fig. 2.9: Full size track pattern and component overlay of p.s.u.**

tion there is no reason why the completed unit should not work immediately.

If an accurate 1MHz squarewave oscillator is available, calibration points may be established right across the band compared with the internally generated carriers which appear at 116, 232 and 348MHz on the dial. In fact, the scale is sufficiently linear to allow reasonably accurate calibration by simply interpolating between these markers. Once the scale has been calibrated, the v.h.f. amplifiers may be switched in and their inductors adjusted, resulting in very much improved sensitivity and rejection of spurious.

For tuning above 30MHz the gain control R13 may be held near maximum, while below 30MHz it will require backing off until the mush between stations, caused by intense cross-modulation, becomes virtually inaudible. Also, if the tuner is to be used in conjunction with a transistorised receiver, it should be appreciated that this complaint might lie with the receiver itself and that some measure of post-converter attenuation could be beneficial.

There is considerable variation in the upper frequency limit of u.h.f. TV tuners and some might take in the 430MHz amateur band. This would necessitate the removal, or switched by-pass, of FL1 which would otherwise introduce appreciable attenuation. In addition, it is, of course, possible to switch the antenna direct to the TV tuner, while at the same time removing the supply voltage from the oscillator module, to introduce a second band tuning the spectrum from 464MHz to

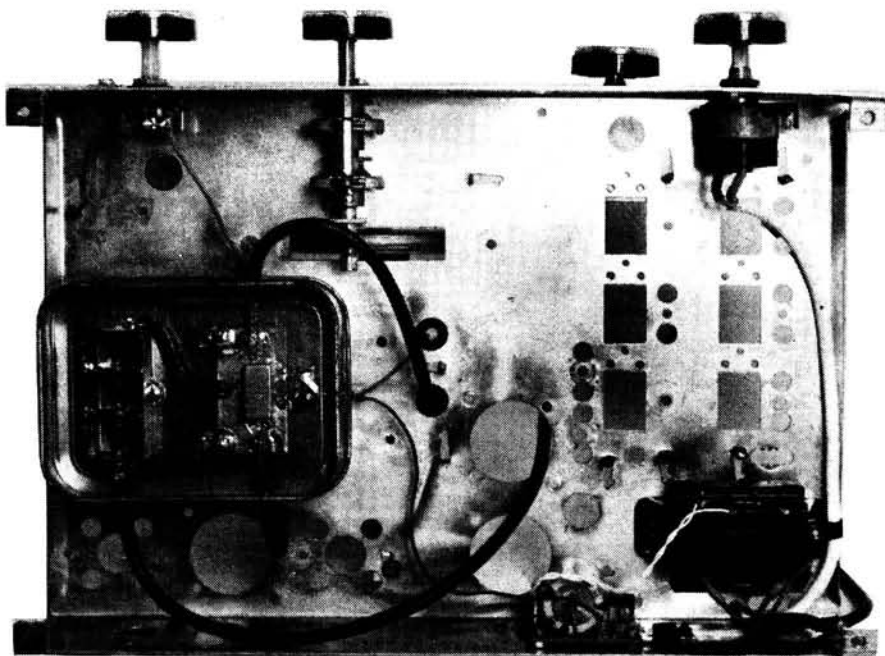

Underside view of "Blandford" test rig showing reduction drives and mounting of screened enclosures

nearly 900MHz. A third band tuning 938MHz to 1300MHz, using subtractive mixing, might also be contemplated but would almost certainly require the more expensive SBL 1-X mixer and a large measure of selective pre-amplification.

The possible use of Varicap tuned units has been largely ignored in the foregoing account, partly because those tested exhibited insufficient thermal and mechanical stability (this defect could be overcome in practice with the application of a.f.c.). However, voltage controlled tuning would be

more convenient in that it would allow the tuning range to be split into any number of small segments, a single variable resistor being connected in series with an arrangement of switched preset resistors which would define the width of each segment. Further experimentation might be directed towards the application of (a.f.c.) automatic frequency control, a luxury rejected by the author on account of the intermittent nature of most v.h.f. signals, or towards a fully-fledged scanning receiver for about a tenth of the cost of its commercial counterparts. **PW**

## ERRORS & UPDATES

### Award Chasing on Satellites January '87

A typographical error crept into the first paragraph of the article. Line 7-8 stated "... the use of satellites is specifically proscribed ...". It should have read "... the use of satellites is specifically proscribed ...". We apologise for any embarrassment this has caused.

### Transceiver Power Unit Sept 1980

#### also in Practical Power Supplies

We have now located a supplier of the 78HG 5 amp variable regulator i.e., Greenweld Electronic Components, 443 Millbrook Road, Southampton SO1 0HX. Tel: (0703) 77250.

## BENNY







"It seems they do read  
our ads in Tokyo,  
Bernie"

# A.R.E. Communications Ltd.

38 BRIDGE STREET,  
EARLESTOWN,  
NEWTON-LE-WILLOWS,  
MERSEYSIDE WA12 9BA.  
TEL: 09252-29881



"Yes, 'lo and behold' no  
more TRIO rigs, only  
KENWOOD in the UK"

ONCE AGAIN BERNIE & BRENDA WILL BE AT NEC BIRMINGHAM WITH SOME VERY SPECIAL OFFERS. JUST A HINT OF THESE ARE SHOWN BELOW; AND OF COURSE WE'LL BE PLEASED TO WELCOME ALL OUR MANY FRIENDS TO OUR STAND WHICH IS LOCATED IN THE CENTRE OF THE MAIN EXHIBITION HALL — STAND No. C8/D9

## SPECIALS FOR NEC

**FT767 HF TRANSCEIVER**  
*with free 2 metre Module*  
**FT757 HF TRANSCEIVER**  
*with free Yaesu Power Supply*  
**FRG9600 VHF/UHF SCANNER**  
*with free Discone & HF Converter*

**KENWOOD front panel badges to fix to your discontinued TRIO equipment. 5p.**  
**De-Luxe version (autographed by Brenda & Bernie) 10p.**

## A.R.E. SEVEN-DAY EXCHANGE PLAN

**IF AT NEC YOU ARE UNDECIDED WHICH RIG TO BUY THEN BERNIE & BRENDA WILL OFFER YOU A 7-DAY EXCHANGE PLAN.**

**RETURN YOUR PURCHASE WITHIN 7 DAYS IN ORIGINAL CONDITION AND WE WILL EXCHANGE IT FOR AN ALTERNATIVE OF YOUR CHOICE.**

**SUBJECT TO AVAILABILITY.**

Phone 09252-29881 for all mail order — Access & Barclaycard accepted

Trade enquiries welcome

All prices include VAT and are correct as we go to press

Opening hours: Monday-Saturday  
10am-5pm

# AKD

TEL.  
0438 351710

Unit 5  
Parsons Green Estate  
Boulton Road  
Stevenage  
Herts SG1 4QG

**MAIL ORDER DEPT.**  
Stock Items Normally  
Despatched within 48 hours,  
21 days latest.

**NEW**

## Unifilter 'CLAMP-ON' RADIO-FREQUENCY CHOKE

PHONE OR SAE FOR PRODUCT SPECIFICATION & APPLICATION NOTES

Allows leads to be torridially protected without the need to cut or remove plugs or connectors. Ideally suited for moulded plugs, leads, ribbon, and large diameter cables. Can easily be fitted and stacked in multiples to increase rejection. 'UNIFILTER' works by suppressing the interference currents that flow along the outside of cables without affecting the signals or power flowing inside. This means that you don't need to worry about upsetting normal operation or invalidating guarantees. Suitable for both reducing the emission of, or rejecting the effect of, 'common mode' interference as experienced on computer, hi-fi & speaker leads, as well as the normal mains & aerial cables.

**UF 4 KIT (SUITABLE FOR SMALLER INSTALLATIONS) £9.89**

**UF 8 KIT (FOR MULTI INSTALLATIONS) £19.55**

### WA1 WAVEMETER

£24.95

### HFC1 CONVERTER

£49.00

### GPA1

### PRE-AMP

£24.95



Our Waveabsorption meter for 2 Mtre transmitters meets licensing requirements range 120Mhz to 450Mhz, very sensitive, can also be used as field strength meter within its range. Requires PP3 type battery (not supplied).



For the FRG 9600/965 our new HF Converter, connects to the aerial socket, and powered direct from the 8 Volt o/p of the FRG 9600. Tune from 100, 1Mhz to 160Mhz, gives tuning range of 100Khz to 60Mhz, uses double balanced mixer, with low pass filter on input.

★ Can be supplied with BNC termination for other scanners ★

2 Mtre RF Pre-amp using BF961 dual gate FET 18 db gain; Low noise, 2Mhz Bandwidth SO 239 termination 25 watts through power. Failsafe switching, can be left in line when not required, auto RF sensing even at 1/2 watt, can be factory tuned between 28-170Mhz.

★ Can also be tuned for 6-4 mtrs ★

## A SELECTION OF OUR MOST POPULAR FILTERS (PHONE OR SEND SAE FOR FULL RANGE DATA SHEET)

### RBF1

A range of UHF notch filters (for inner only) stocked at the following frequencies: 435MHz (70cms) channel 36 (for radar blips), 846MHz (RAF Boulmer interference) can be factory tuned from 420MHz to 890MHz. £6.75 each

### HPF1

Low insertion loss high pass filter with capacitive braid breaker for use with UHF TV, VIDEO & PRE-AMPS. £6.75 each

### HPFS

High pass filter with transformer braid breaker, better performance than HPF1 but the insertion loss is a little higher. 1-2db best for severe problems for UHF only. £7.00 each

### TNF2

A range of notch filters specifically tuned for the frequency of interference on inner and outer bandwidth >1Mhz (2Mhz above 100Mhz). VERY LOW INSERTION LOSS TYPICALLY <0.5db. Stocked for the following frequencies: 14Mhz, 21Mhz, 27.5Mhz (CB), 29Mhz, 50Mhz, 71Mhz, 145Mhz. Also spot tuned at any frequency to 300Mhz. £7.75 each

To order quote TNF2/ and the frequency.

### BB1

Transformer braid breaker >25db at 30Mhz, often used with other filters in our range for very severe interference. Ideal at the input of VCR and PRE-AMPS. £6.75 each

## IDEAL FOR CLUBS OR EMC GROUPS FOR EVALUATION OF INDIVIDUAL SITUATIONS DK1 FILTER KIT

Kit of all filters in our range (11 in all) except for RBF1/ 846Mhz. £41.70

WE ALSO STOCK TORROID RINGS @ £2.50 PER PAIR.

★ EMC PROBLEMS ★

PHONE OUR TECHNICAL HELPLINE ON THE ABOVE PHONE NO. BETWEEN 10am & 12 NOON ANY WEEKDAY.

ALL PRODUCTS ARE AVAILABLE FROM US DIRECT MAIL ORDER OR C.O.D. ALSO AVAILABLE FROM LEADING AMATEUR RADIO DEALERS

ALL OUR PRODUCTS CARRY THE USUAL AKD 2 YEAR GUARANTEE. PRICES QUOTED ARE CORRECT AT TIME OF GOING TO PRESS AND INCLUDE VAT, POSTAGE & PACKING

RSGB NOW STOCK OUR FILTERS AND MEMBERS CAN OBTAIN THEM AT A DISCOUNT FROM RSGB HQ.

Props: RT & VEL Wagstaffe. Technical Adviser: John Armstrong

*M. P. Clarke originally designed this continuity tester to help when ringing out long lengths of cable on radar sites. For the amateur it also has its uses.*

# Simple Discriminating Continuity Tester



What distinguishes this continuity tester from many others is its ability to discriminate between the normal resistance in a circuit or cable and the slightly higher resistance of a poor connection.

The circuit of the continuity tester is shown in Fig. 1, it comprises two distinct sections,

- 1: the oscillator and
- 2: the probe sensor

The oscillator section employs a conventional multivibrator circuit using Tr1 and Tr2 with a free-running frequency of about 1.5kHz. This output is directly coupled to a medium-impedance telephone earpiece which produces a suitably loud tone.

The probe sensor is required to control the tone output, which it does by switching the power supply on and off as required. Another feature of the probe sensor in this circuit is the ability to indicate the presence of any excess resistance in the circuit under test.

The sensor is very simple and is comprised of Tr3, D1 and R5. When the probes are shorted together, Tr3 is driven into saturation and the oscillator supply current (approximately 30mA) is split via two paths. The first path is D1 and the collector-emitter junction of Tr3, and the second path is the test probes, R5 and the base-emitter junction of Tr3.

If R5 is set to about 25Ω the current is equally divided between these two paths and the l.e.d. is illuminated. Any increase in the resistance of R5, or the circuit under test, will make the l.e.d. brighter and conversely any decreases will dim the l.e.d. If R5 is adjusted so that the l.e.d. is just extinguished with the probes connected to the circuit under test, the l.e.d. lighting will indicate the presence of excess resistance in the circuit.

One added bonus of this probe sensor is that it eliminates the need for an on/off switch. Providing the probes are kept apart the supply current, when the unit is not in use, is reduced to the leakage current through D1 which is minimal.


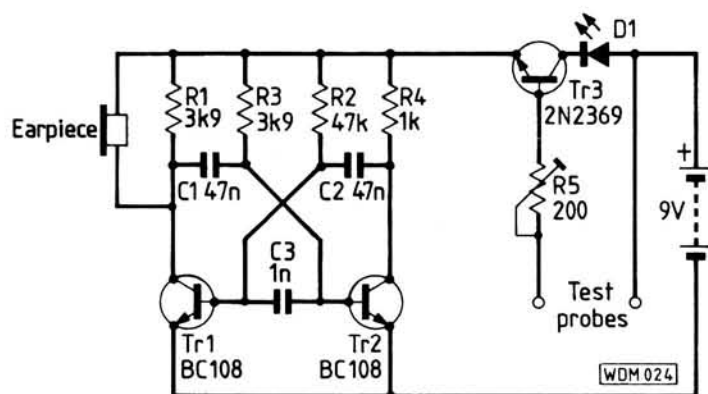


Fig. 1

## In Use

When checking equipment wiring or short cable runs it is sufficient to short the probes together and adjust R5 so that the l.e.d. just extinguishes. To check the wiring the probes are connected, one to each end of the circuit. If all is well with the circuit the tone will sound and the l.e.d. will remain extinguished. If the tone doesn't sound then the circuit is probably open, or very high resistance. If the tone sounds and the l.e.d. lights then there is some excess resistance which may be due to a poor connection.

When testing long cable runs it is obviously impractical to connect one probe to each end of the circuit. The technique here is to either loop pairs of wires at the distant end or to bunch

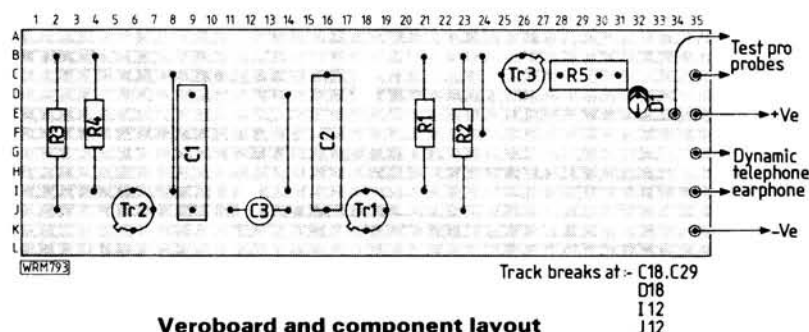

Veroboard and component layout



all the wires at the distant end. If the "looping" system is employed, the probes are connected one to each leg of the looped pair. If the "bunching" system is used then one wire is nominated as the "master" and one probe is connected to this wire and the other probe is moved sequentially around the remaining wires.

To set R5 on long cable runs the probes are connected to the first circuit under test and R5 is adjusted until the l.e.d. just extinguishes. The indications given by the tone and l.e.d. are the same as for testing short cable runs, as described earlier.

One word of warning about this unit is the current applied to the circuit under test is between 15 and 30mA. So it should **not** be connected directly to semiconductor circuitry. **PW**

## SHOPPING LIST

### Resistors

$\frac{1}{4}$ W 5% Carbon film		
1k $\Omega$	1	R4
3.9k $\Omega$	2	R1,3
47k $\Omega$	1	R2

### Potentiometers

Cermet trimmer		
200 $\Omega$	1	R5

### Capacitors

Polycarbonate		
47nF	2	C1,2
Sub-min Ceramic plate		
1nF	1	C3

(1) Cricklewood Electronics Ltd. Tel: 01-450 0995.

(2) J&N Bull Electrical. Tel: 0273 734648.

### Semiconductors

Diodes		
red l.e.d.	1	D1

Transistors		
BC108	2	Tr1,2
2N2369 <sup>(1)</sup>	1	Tr3

### Miscellaneous

Veroboard 30 holes x 6 tracks; 4T telephone earpiece<sup>(2)</sup>; PP3 battery; Battery connector; pvc covered wire; Crocodile clips (2).



## NEWS

### Engineering Details

#### Hooke & Toller Porcorum:

A new relay station has been built 17km north-west of Dorchester. The channels are:

- Ch. 40—BBC1 South West
- Ch. 43—ITV TSW
- Ch. 46—BBC2
- Ch. 50—Channel 4

Viewers will need horizontal group B antennas.

**Bristol:** The v.h.f. f.m. Radio 4 service from the Bristol relay transmitting station (Ilchester Crescent) has

changed to 93.7MHz. Also the v.h.f. f.m. service for Radio Bristol will change frequency:

- Bath — 104.6MHz
- Ilchester Cres — 94.9MHz

**Chilfrome:** A new relay station has been built 15km north-west of Dorchester.

The channels are:

- Ch. 39 — BBC1 West
- Ch. 45 — ITV HTV West
- Ch. 49 — BBC2
- Ch. 52 — Channel 4

Viewers will need horizontal group B antennas.

### Club Changes

The Armagh & Dungannon District ARC have moved their meeting place and evening. The new details are:

County Armagh Golf Club  
Newry Road  
Armagh City  
2nd Wednesdays.

The Felixstowe & District club have moved. The new address is:

The Scout Hut  
Bath Road  
Felixstowe

Welwyn/Hatfield ARC have changed their main meeting venue: The new address is: Lemsford Village Hall  
Brocket Road  
Lemsford

### Reunion Dinner

Saturday May 2 is the date for the Cambridge University Wireless Society and Oxford University Radio Society Reunion Dinner for 1987.

This dinner is the main social event for the two societies and is intended to allow both past and present members to meet and talk in conjunction with a first class formal dinner.

It will be held in Selwyn College, Cambridge. The cost is £15 and some limited accommodation is available. Applications should be sent to **Dr James Keeler G4EZN, Selwyn College.**

### RAYNET News

During the wintery weather of January 13–17, conditions caused a number of RAYNET groups to be called out.

**Leicestershire:** Members operated their "snowdesk" travelling info service for the benefit of mobile radio amateurs and the community at large in collaboration with their CEPO. They worked for 40 hours over 3 days with over 3000 messages.

**West Midlands:** Groups were placed on a listening

watch by their CEPO to gather road info for the Fire Service. They ran from Tuesday to Thursday.

**Norfolk:** RAYNET were called out by the Police and CEPO (for use with the Ambulance Service, Health Authority, Social Services and Highways Dept). They were involved with getting patients and consultants to hospitals, transporting urgent drugs, babies' milk, fuel and even a search for a missing person. Total activity exceeded 6000 RAYNET manhours.

**Strathclyde:** RAYNET was called out by their EPO to help the Social Services Dept. The Army were also involved and there developed a friendly rivalry between groups e.g. Jan 14 Army 23, RAYNET 22 jobs completed.

We all should say a big thank you to those mentioned here (and those unmentioned) for all their work and all the unsung heroes who helped by keeping frequencies clear throughout the emergency. Amateur radio at its best.

### Commonwealth Games Award Certificate

Any person who has not to date received their certificate is requested to contact the originators and organisers of the Award—The Lothian Radio Society, QTHR, who used the callsign GB8CG for the event.

PO Box 20 Motherwell, The Post Office box of the Mid-Lanark ARS was used for both stations taking part as a clearing house for mail for the Lothian Club.

### Can We Help You?

**Do you have any forthcoming rallies, special events or exciting news—tell us and we'll tell others.**

# Test Methods and Equipment Part 1

*In this series, Ray Steele takes a look at all kinds of test measurements, standards of measurement and test equipment.*

## Metric Units

The French Academy of Science was instructed, in 1790, by the French Government to invent a new system of units.

Since all measurements are based on observations in one's environment, they chose their unit of length as one tenmillionth of the distance from the North Pole to the equator, along the latitude through Paris. This they called the metre and the decimal system was born. Decimal multiples and their symbols are shown in Table 1.1.

The unit of time was adopted without change from the existing units as 1/86 400 of the mean solar day. The unit of mass chosen was the gram which is 1cc of distilled water at 4°C and 760mm of Mercury (atmospheric pressure).

The above centimetre-gram-second (CGS) system was adopted by the British Association for the Advancement of Science since the metre-kilogram-second (MKS) system is unwieldy for laboratory use.

Giorgi, an Italian engineer, introduced the Ampere to the MKS system which was modified to the MKSA system in 1935.

The original MKS system was in use in France by 1795, five years after the French Government commissioned the French Academy. It was also adopted at the metre convention of 1875, by seventeen countries, 80 years after it was adopted by France. But the USA and Britain are only just starting to implement these on a scale outside the laboratory, even though there was an international agreement in 1960

**Table 1.1**  
**Decimal Multiples**

Tera	T	10 <sup>12</sup>
Giga	G	10 <sup>9</sup>
Mega	M	10 <sup>6</sup>
Kilo	k	10 <sup>3</sup>
Hecto	h	10 <sup>2</sup>
Deca	da	10
Deci	d	10 <sup>-1</sup>
Centi	c	10 <sup>-2</sup>
Milli	m	10 <sup>-3</sup>
Micro	μ	10 <sup>-6</sup>
Nano	n	10 <sup>-9</sup>
Pico	p	10 <sup>-12</sup>
Femto	f	10 <sup>-15</sup>
Atto	a	10 <sup>-18</sup>



**This is how the original PW lab looked**

accepting these as System International d'Unites (SI units).

Some common SI units and their symbols are shown in Table 1.2.

The Imperial system (foot-pound-second) is a legacy of the Roman occupation. The conversion between the two units is shown in Table 1.3. The biggest advantage of the metric system is that it goes up or down in steps of ten, making calculations easy. Some quantities have unique names honouring scientists: Watt, Joule, Coulomb, Newton, Hertz etc.

Units are either fundamental or derived. Length and mass are fundamental units but force has dimensions of kg m/s and is a derived unit since it contains more than one fundamental unit.

**Table 1.2**  
**Some common SI units**

Quantity	Symbol	Unit
Potential Difference	V	volt
Current	A	ampere
Resistance	Ω	ohm
Quantity of Electricity	C	coulomb
Power	W	watt
Frequency	Hz	hertz
Inductance	H	henry
Magnetic Flux	Wb	weber
Density	T	tesla
Capacitance	F	farad
Temperature	K	kelvin
Time	s	second
Mass	kg	kilogram
Length	m	metre
Force	N	newton
Work	J	joule
Velocity	m/s or m·s <sup>-1</sup>	metre/second

## Standard of Measurement

Standards of measurement are maintained at four levels:

- International standards
- Primary standards
- Secondary standards
- Working standards

Working standards are used for calibrating laboratory instruments and secondary standards are calibrated by industrial laboratories using primary standards.

Primary standards are compared to provide an average figure. Primary standards are kept in national laboratories like the National Physical Laboratory (UK) and National Bureau of Standards (USA). The International standards are kept near Paris at the International Bureau of Weights and Measures and checked occasionally.

**Table 1.3**  
**Metric to Imperial Conversion**

	Metric	Imperial
Mass	kilogram	2.205 pounds
Length	metre	39.37 inches
Velocity	metre/second	3.2808 feet per second
Temperature	degrees centigrade	(9/5)C + 32° Fahrenheit
Work	joule	23.75 foot-pounds
Power	watt	0.00134 horse power
Force	newton	7.23 poundals



## Voltage, Current and Resistance Standards

Voltage standards employ Weston cells of the saturated or unsaturated variety. A saturated cell employing cadmium sulphate as the electrolyte is shown in Fig. 1.1. The positive electrode is mercury and the negative electrode is an amalgam of cadmium consisting of 10 per cent cadmium.

At 20°C, the voltage is 1.0185V with an internal resistance of between 500 and 800Ω. Therefore the voltage drop across the internal resistance becomes important if the current increases above 100μA.

The voltage of the cell drops 40μV for each degree (Centigrade) rise in temperature and the cell is immersed in a bath of oil to keep the temperature constant.

The saturated cell reproduces the voltage fairly accurately and is used as a primary standard. The unsaturated cell is used as a secondary standard since it is rugged and stable at room temperatures.

A standard resistor is made from manganin, an alloy of high resistance so that only a small piece is necessary to represent one ohm. This source is kept in a glass jar with double walls so that the temperature and humidity are constant. The other feature of manganin is its low temperature coefficient i.e. its resistance changes in small amounts with changes in temperature.

The ampere was defined as the current which produced a force of  $2 \times 10^{-7}$  newton per metre in two parallel conductors one metre apart. The ampere was also defined as that current which would deposit 1.118mg of silver out of a silver nitrate solution in one second.

In 1948 the definition of the ampere was changed to that current producing the required force between two coils of defined size. This is easier to reproduce than either of the previous two definitions.



▲ A typical digital multimeter and handbook

What a digital multimeter looks like inside ►

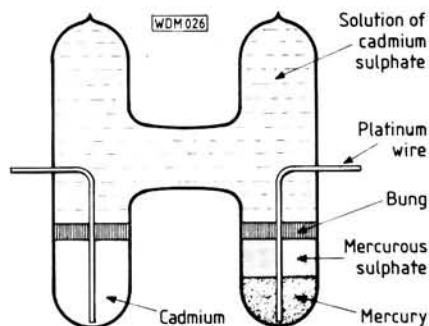


Fig. 1.1

## Magnetic Flux, Inductors and Capacitors

One method of generating a standard magnetic flux is shown in Fig. 1.2. A hollow brass cylinder is wound with insulated copper wire. When a catch releases the cylinder, it drops into a soft iron container.

A permanent magnet is located in the centre of the container and the windings on the cylinder cut the field of the permanent magnet. This causes a current to be induced in the windings which is proportional to the field (flux). The cylinder drops at a constant rate under gravitational pull.

Standard inductors come in sizes from 100μH to 10μH and standard capacitors with solid dielectrics or air as a dielectric. Silver-mica is a stable solid dielectric and is used in the larger value capacitors.

## Time and Frequency

If we can derive one, the other follows since one is the reciprocal of the other i.e.

$$t = 1/f$$

When electrons fall from a higher to lower energy level, light is emitted in giving up this energy. The relationship is:

$$hf = E_2 - E_1$$

where:  $E_2$  is the higher energy level

$E_1$  is the lower energy level

$f$  is the frequency

$h$  is Planck's constant

This relationship is explained in Fig. 1.3. Caesium emits a frequency of 8 192 631 770Hz and has been used in atomic clocks since 1955. This is much

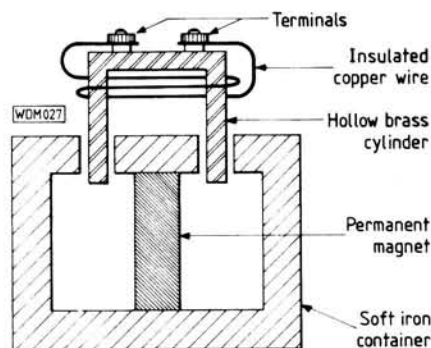
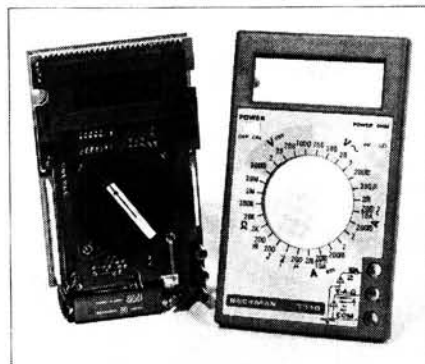


Fig. 1.2




Fig. 1.3

more accurate than relying on the earth's rotation.

## Standard Mass

The International Bureau of Weights and Measures near Paris keeps the International kilogram which is accurate to 1 part in  $10^8$ . Laboratory standards are accurate to 1 part in  $10^6$  and working standards to 5 parts in  $10^6$ . The term weight is not used since the weight of an object will vary with its distance from the earth.

## Standard Length

Since 1960 this has been based on radiation from a krypton lamp. Before this the metre was defined as the distance between two marks on a platinum-iridium bar. This is accurate to 1 in  $10^5$  but the krypton lamp method is more accurate. The wavelength of the orange-red discharge is multiplied by 1 650 763.73 to arrive at one metre. Steel blocks with faces flat to within 0.25 to 0.5 in  $10^{-6}$  metre are used as working standards.

## Temperature and Luminous Intensity

The primary temperature standard is the platinum thermometer and temperature is measured in kelvin (absolute temperature).


Platinum solidifies at 2042 kelvin and a black body at this temperature is used as the standard of luminous intensity. A candela is one sixtieth of this intensity per square centimetre.

Tungsten lamps are used as secondary standards and by operating at the required temperature, the radiation is the same as that of the primary standard. This is in the visible region.


These are the standards and units in use at present. No doubt there will be improvements in the standards if not in the units.

PART 2 NEXT MONTH

# COME ON DOWN & MEET THE TEAM

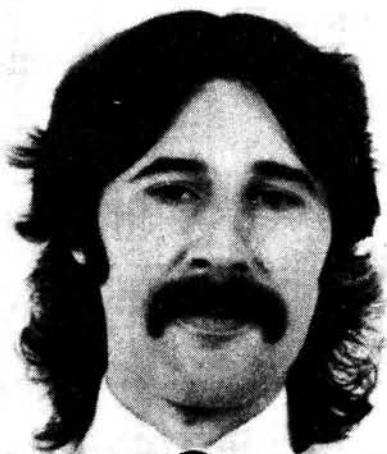

**Pete Hizzey/G6YLO**  
Engineer.

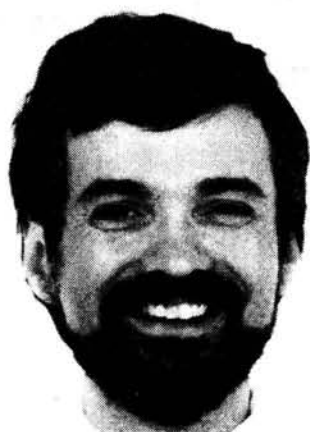

**Chris Lambert/G4PCN**  
Land mobile sales.



**Andy Stockley/G8ELP**  
Ham sales.



**Phil Hadler/G4CZU**  
Sales Director.




At this years RSCB exhibition you will be able to see and buy ICOM equipment direct from us, Thanet Electronics Ltd, sole ICOM importers in the U.K.

Our sales team will be ready to discuss and recommend the ICOM set to suit your requirements. New radios will be on show underlining ICOM's constantly improving range.

Some models will have a special exhibition price so make a point of visiting the ICOM stand No. A20 at the RSCB Exhibition, N.E.C., Birmingham on March 27th. and 28th. 1987 or

**For all enquiries regarding ICOM Amateur Radio Equipment contact: ICOM/Thanet**



**The Work**



# OWN TO N.E.C. THE TEAM.



**Andy Rudd/G6MRI**  
Retail shop manager.

**Ian Kuypers**  
Marine sales.

**Dennis Goodwin/G4SOT**  
Ham sales.

**Fraser Stuart/G8FEZ**  
Technical Director.

**COM**  
**d System**

you may miss a bargain.

All equipment bought on our stand can be paid for with cash, cheque, Access and Barclaycard, Interest-free credit can also be arranged. This could be your chance to own the ICOM radio you have always dreamed of.

Should any items have to be sent on to you we now operate a full Datapost service giving next day delivery. Come on down to N.E.C., meet the team and see why ICOM is going up in the world.

Electronics Ltd. Dept PW, Sea Street, Herne Bay, Kent CT6 8LD. Tel: (0227) 363859.



# PW "Itchen" LCR Bridge

The d.c. Wheatstone bridge is historically the basic circuit for measuring resistance and comparing resistors accurately. This self contained LCR component bridge, which is based on the Wheatstone circuit, can measure resistance ( $10\Omega$ – $10M\Omega$ ), also capacitance ( $10pF$ – $10\mu F$ ) and inductance ( $100\mu H$ – $1H$ ). Usable indications can also be obtained for values up to a factor of ten above and below the ranges quoted. The bridge will find many uses in the service department and experimenter's workshop says J. Thornton Lawrence GW3JGA.

The d.c. Wheatstone bridge is a very simple and accurate arrangement for measuring resistance, the circuit of which is shown in Fig. 1a. It consists of a battery to drive current through the resistor bridge network and a centre zero meter or null detector to detect the balance condition. The unknown resistor to be measured,  $R_x$ , is connected in one arm of the bridge and the remaining three calibrated resistance arms of the bridge,  $R_a$ ,  $R_b$  and  $R_s$  are adjusted in value to give zero indication on the meter. In this condition the value of  $R_x$  is given by:

$$R_x = R_s \times (R_a/R_b)$$

In Fig. 1b the same circuit has been redrawn to show graphically that if  $R_a$  and  $R_b$  are equal, balance or zero reading will be obtained when  $R_s = R_x$ .

In Fig. 1c the same circuit is shown with  $R_a$  and  $R_b$  replaced with a variable potentiometer control in which the ratio of  $R_a$  to  $R_b$  can be varied by rotating the control. If the control is fitted with a knob, scale and pointer then the scale can be calibrated directly in terms of  $R_a/R_b$ —this method is used in the PW "Itchen".

In theory the ratio  $R_a/R_b$  provided by the potentiometer is infinite, but in practice ratios of up to 10:1 are quite satisfactory, with indications of lesser accuracy up to 100:1. To cover a wider range of values of  $R_x$  the value of  $R_s$  (the range or standard resistor) can be switched in decade ranges—100, 1000, 10 000 etc. This allows the value of  $R_x$  to be measured directly by selecting an appropriate value of  $R_s$ , adjusting the potentiometer for null indication,

reading the ratio indicated on the dial and multiplying this by the value of  $R_s$ . For example, with the unknown resistor connected, an attempt to find a null point would be made by rotating the potentiometer and, if necessary, switching the value of  $R_s$  to bring the null point within the 10:1 range on the potentiometer dial. If a null was obtained at a dial reading of 2.5 and  $R_s$  was set to 1000 $\Omega$  then the value of  $R_x$  could be read off as:

$$2.5 \text{ (dial)} \times 1000 \text{ (Rs)} = 2500\Omega$$

A feature of the Wheatstone bridge is that the measurement is not affected by the supply voltage. In practice, if the bridge volts are reduced then it may require a more sensitive null detector to locate the null point with the same certainty, but the resistance measurement would be unaffected.

## AC Wheatstone Bridge

The d.c. version can be made to work on a.c. simply by replacing the battery with an a.c. voltage source, at say audio frequency, and the null detector by a headphone or a.c. millivoltmeter. In addition to being able to measure resistors the bridge will now be able to measure reactive components, capacitors and inductors. Because of the relative simplicity of the circuit the bridge is unable to isolate and measure separately the reactive and resistive parts of a complex impedance. However, for checking components and making the usual workshop measurements, this is unlikely to be a serious limitation.

## Circuit Description

The circuit of the PW "Itchen" is shown in Fig. 2. It comprises a Wien bridge oscillator running at 1.6kHz, a Wheatstone bridge circuit with a




Fig. 1a: DC Wheatstone bridge




Fig. 1b: Wheatstone bridge redrawn to show balance



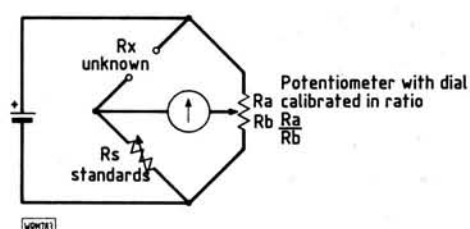


Fig. 1c: Wheatstone bridge with ratio dial and standard

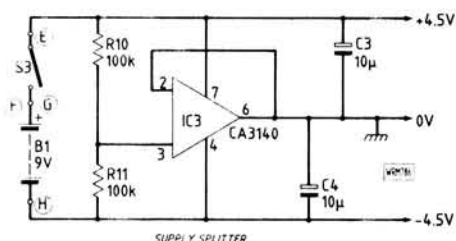

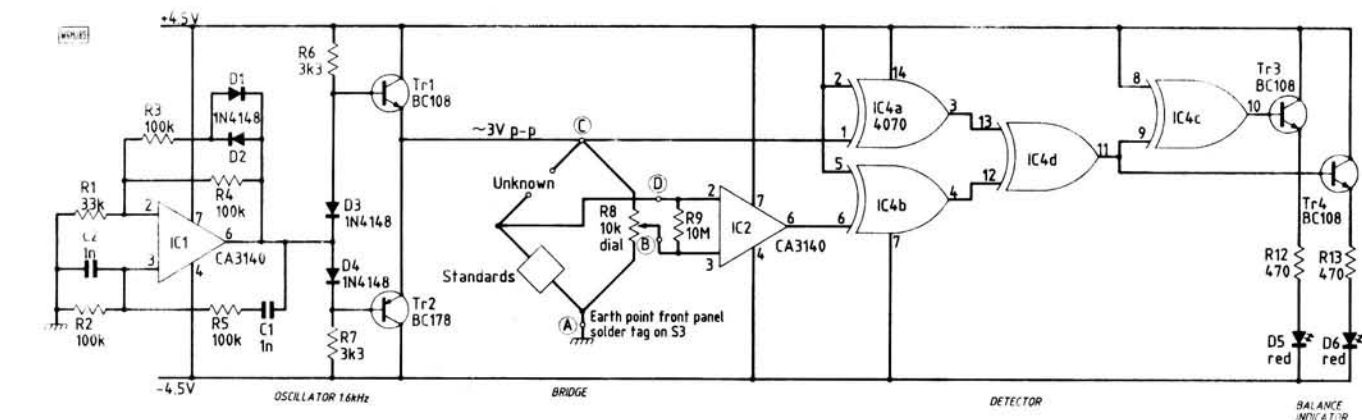

**Fig. 2: LCR bridge circuit diagram**

potentiometer and dial calibrated in ratio and a sensitive null detector incorporating a phase sensitive rectifier with l.e.d. balance indicator. Most a.c. bridge circuits require a special transformer either to drive the bridge or to feed the null detector. An alternative is to exploit the common mode rejection characteristic of an op-amp. The *PW* "Itchen" uses a CA 3140 f.e.t. op-amp for this purpose.

## Oscillator

The 1.6kHz oscillator consists of an op-amp IC1 with positive feedback through a Wien bridge network R5, C1, R2, C2 which determines the frequency of oscillation. Amplitude stabilisation is provided by the negative feedback network R1, R4 and R3

and D1 and D2. The sine wave output is fed to a push-pull amplifier consisting of Tr1 and Tr2; this stage has a low output impedance and provides a 3V peak-to-peak signal to drive the Wheatstone bridge network.

## Bridge Network


The bridge network is built on the front panel and comprises the ratio potentiometer and the "standards" (resistors Rs, inductors Ls, and capacitors Cs) which are switched into circuit by two rotary switches S1 and S2. These are shown in Fig. 3 and the scale is shown in Fig. 4. It will be noticed that there is a forward reading scale for R and L and a reciprocal scale for C. The scale is calibrated for the 10kΩ 1watt wire-wound potentiometer, RS Components type 173-237. If any other type of potentiometer is used, having differing degrees of rotation, then a different scale will be required and details for making this are given at the end of the article.

Ideally all the "standards" should have a tolerance of no greater than  $\pm 1\%$ . Unfortunately, not all the values required are available to as close a tolerance as this. However, the follow-


ing components are readily available and were used successfully in the prototype.

### List of "Standards"

- Rs1 1MΩ 0.25W metal film 1% RS 149-228
- Rs2 100k 0.25W metal film 1% RS 148-972
- Rs3 10k 0.25W metal film 1% RS 148-736
- Rs4 1kΩ 0.25W metal film 1% RS 148-506
- Rs5 100Ω 0.25W metal film 1% RS 148-269
- Cs1 1μF 0.25W Polyester 10% RS 115-152
- Cs2 100n Polyester 20% 20% RS 115-102
- Cs3 10n Polystyrene 2.5% RS 113-409
- Cs4 1000p Silvered Mica 1% RS 124-948
- Cs5 68p Silvered Mica 1% RS 124-752
- in parallel with 5-65p Trimmer RS 125-660
- Ls1 1mH Toko 181LY-102 5/10%
- Ls2 10mH Toko 181LY-103 5/10%
- Ls3 100mH Toko 181LY-104 5/10%

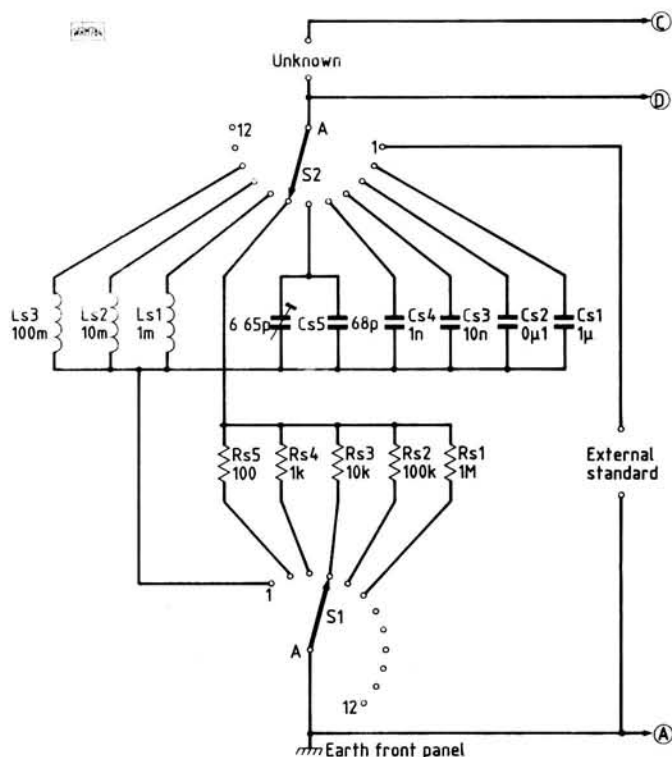

**Fig. 3: Switched L,C&R standards**

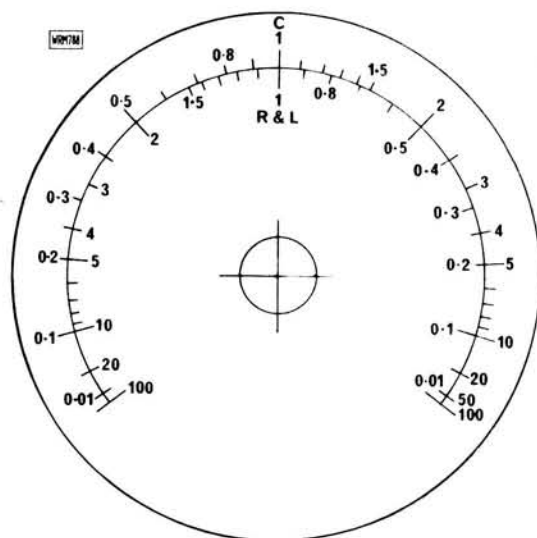

**Fig. 4: Front panel scale (full size) for LCR ratios**

The range switches are arranged so that one covers the resistance ranges and the other the capacitance and inductance ranges. An EXT (external) position is provided which allows an external standard to be connected to the EXT terminals. This is a useful feature as the bridge can be used to match components or to measure differences between two similar components connected to the UNKNOWN and EXT terminals respectively. Note that Cs5 consists of two components, a fixed capacitor with a trimmer connected in parallel. The trimmer is set during calibration to compensate for the few picofarads of unavoidable stray capacitance existing within the bridge and ensures that the low capacitance (100pF) range reads correctly.

### Detector

The null detector consists of an op-amp IC2 whose excellent common mode rejection and high gain are used

to isolate and amplify difference signals appearing between points (D) and (B) on the bridge network. The output from IC2 is compared with the oscillator signal in a phase-sensitive detector circuit using an exclusive OR gate IC4d. The output of this is fed to Tr4 and its associated l.e.d. and to IC4c connected as an inverter and so to Tr3 and its l.e.d. In use, the bridge is balanced when both l.e.d.s display the same brightness. The phase method of balance detection gives a sharper, clearer indication than that from the usual null detector.

### Supply Splitter

The op-amps require both positive and negative supplies and to avoid the need for two separate batteries the incoming single 9 volt supply is "centre tapped" using IC3. The centre voltage is determined by R10 and R11 and IC3 is connected as a voltage follower to provide a 0 volt connection for the derived +4.5V and -4.5V lines.

### Construction

The construction is conveniently divided into two parts: (1) the front panel which carries the ratio potentiometer, and the range switches with their "standard" components, as shown by the photograph and (2) the printed circuit board containing the active circuits and components, as shown in Fig. 5. The front panel and the p.c.b. are the same size (173mm x 84mm) and drop into slots in the Vero 202-21039N case, as shown in the photograph.

The first stage is to mark out and drill the front panel as shown in Fig. 6. This is best done by covering the front of the panel with masking tape, marking the hole positions on the tape and centre punching through it on to the panel. The tape may then be removed before drilling. Lettering is done using press-on lettering (I used Letraset Sheet 208) as shown in the photograph. The scale shown in Fig. 4 is full size

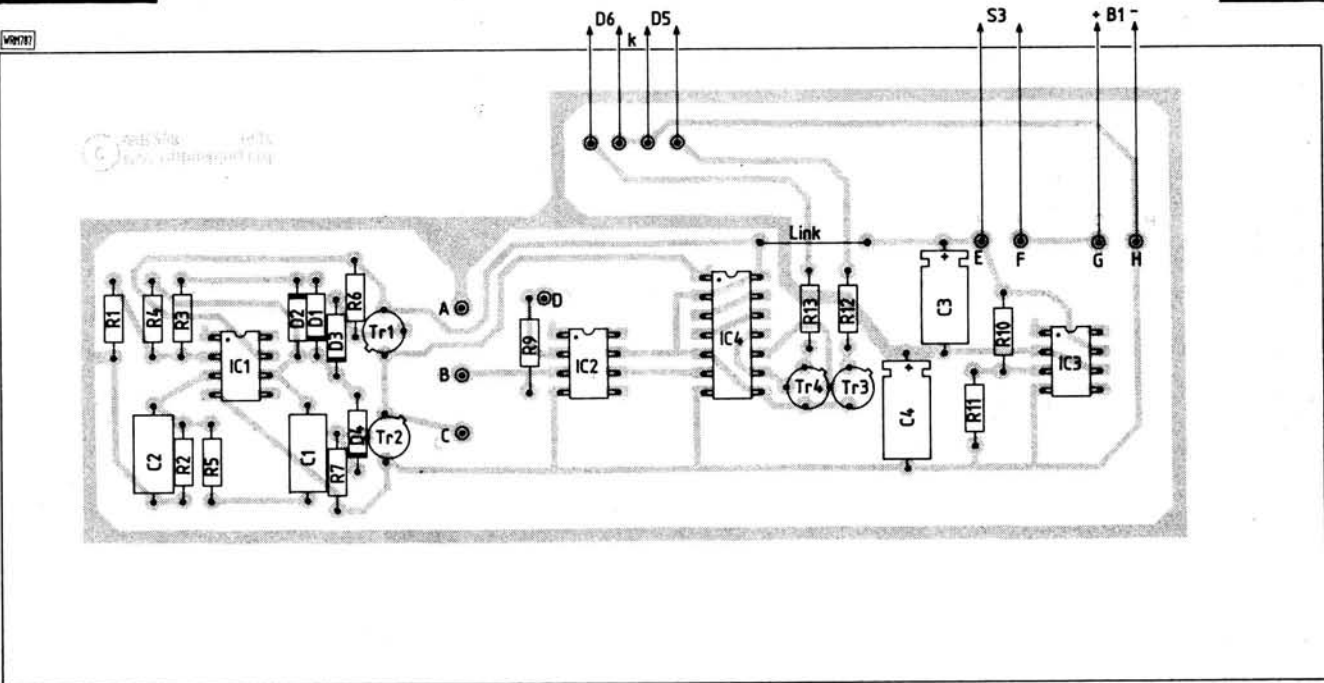
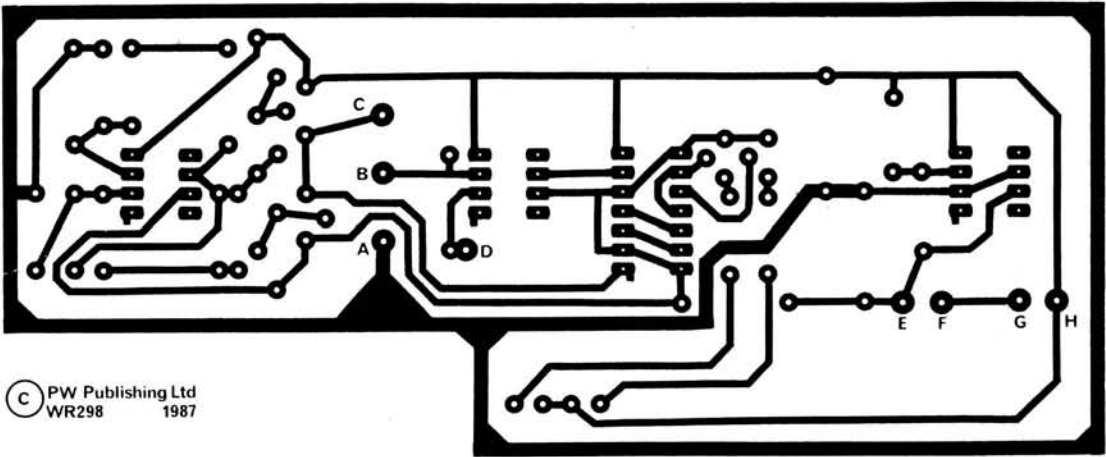


Fig. 5: Copper track pattern and component layout shown full-size

and may be photocopied, cut to size and fixed to the front panel using Cow Gum or Pritt Stick adhesive. Make sure that it is centred over the potentiometer hole and that the centre line is vertical.

## Range Switches

The spindles of the rotary switches S1 and S2 should first be cut to length to suit the type of knob being used. The easiest way to wire each switch is to clamp it in a vice, by the spindle, keeping the tags uppermost. The switch can then be rotated to the most convenient position for soldering. It can be seen that the tags around the edge of the switch are numbered 1 to 12 and the tag near the centre is labelled "A".

Start by wiring S1 as this is the simplest. Cut the resistor leads (Rs1 to Rs5) to a length of 35mm. Bend one end of each resistor lead to hook through the appropriate switch tag and solder it in position. Repeat for all resistors. Cut a 75mm length of 20 s.w.g. tinned copper wire and bend it into a circle of diameter 22–23mm, overlap the ends and solder to form a ring. Carefully bend the end of each resistor lead over the ring, adjust and position the leads as necessary, then solder into position. This completes the assembly of S1.

The switches S1 and S2 have an adjustable rotation limit stop fitted so that the number of positions can be defined. To set the stop, remove the fixing nut and shakeproof washer completely and lift off the stop ring. Check the hole locations and, for S1, replace the stop ring with the leg in hole 6 (the 5th one going clockwise). For S2 use hole 10 (the 9th one going clockwise). The switch should be fitted to the front panel immediately, to avoid the stop ring accidentally slipping out and be-

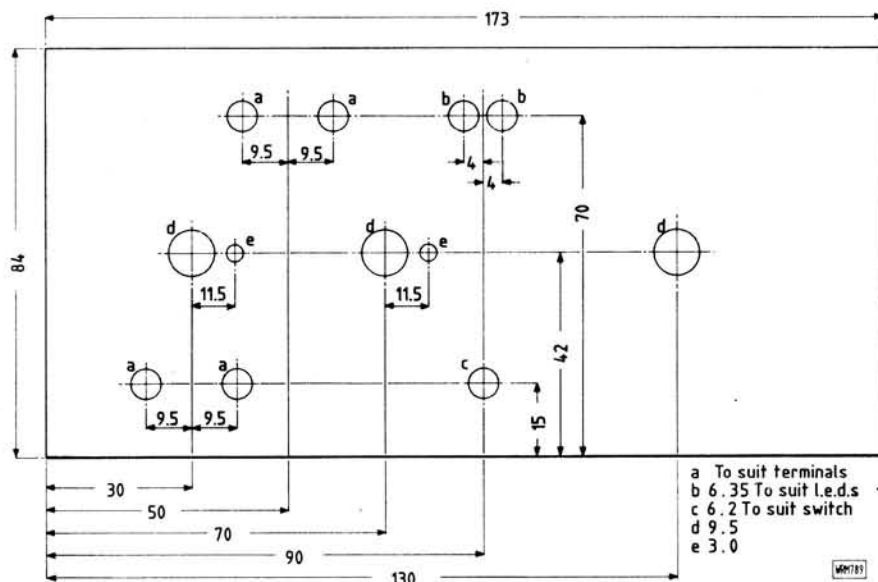


Fig. 6: Front panel drilling pattern

coming misplaced. It is important that the switch is correctly positioned with the locating peg immediately below the mounting hole before fitting the shakeproof washer and nut.

Repeat the above assembly procedure for S2. It will be necessary to solder mounting wires to each of the three inductors, these can then be mounted in the same way as the capacitors. Cut the leads to length and make another ring of wire to support the components as with S1. The trimmer capacitor may be soldered directly to the ring by its rotor tags and a lead taken from its stator tag to the switch, along with the 68pF capacitor, the parallel combination forming Cs5. Set the switch rotation stop to 10 and fit the switch to the front panel.

Next fit the UNKNOWN and EXT terminals, using insulated bushes. Take the on/off switch S3 and fit a large earth tag on the bush before fitting it to the panel. This tag provides


the main earth connection for the front panel and should not be omitted. The remaining wiring is then completed using 20 s.w.g. tinned copper wire. To make a neat job it is helpful to pre-stretch the wire—just clamp the end of a 1 metre length in a vice and with a pair of pliers pull the other end until the wire just stretches and work-hardens to give a nice straight length ready for wiring.

## The Printed Circuit Board

The p.c.b. is loaded with components in the usual way and double-ended pins are inserted and soldered at the points where leads are taken to the front panel and battery. The front panel and p.c.b. are fitted in the case in the positions shown in the photograph and the connections between the p.c.b. and the panel are made using lengths of insulated wire, as straight and direct as possible. The l.e.d.s have their leads lengthened by soldering on pieces of insulated wire and are then mounted through the holes in the front panel, the leads cut to length and soldered to the pins on the p.c.b. The PP3 battery connector leads are connected to pins G and H as shown in Fig. 5.

## Pointer Knob

Some improvisation may be needed here depending on the tools and materials you have to hand. The prototype instrument used an RS moulded knob, Style SK (RS 499-087), as this has a large flat flange on which to glue the pointer. The pointer is made from clear Perspex which may be obtained from a local sign manufacturer or cut from a sandwich box lid. The pointer is filed to shape and a cursor line scribed on the underside and filled with black drawing ink. A hole is drilled in the knob end, to clear the potentiometer spindle bush and the completed pointer is centred on the underside of the knob and fixed to the flange using Evostik impact adhesive.

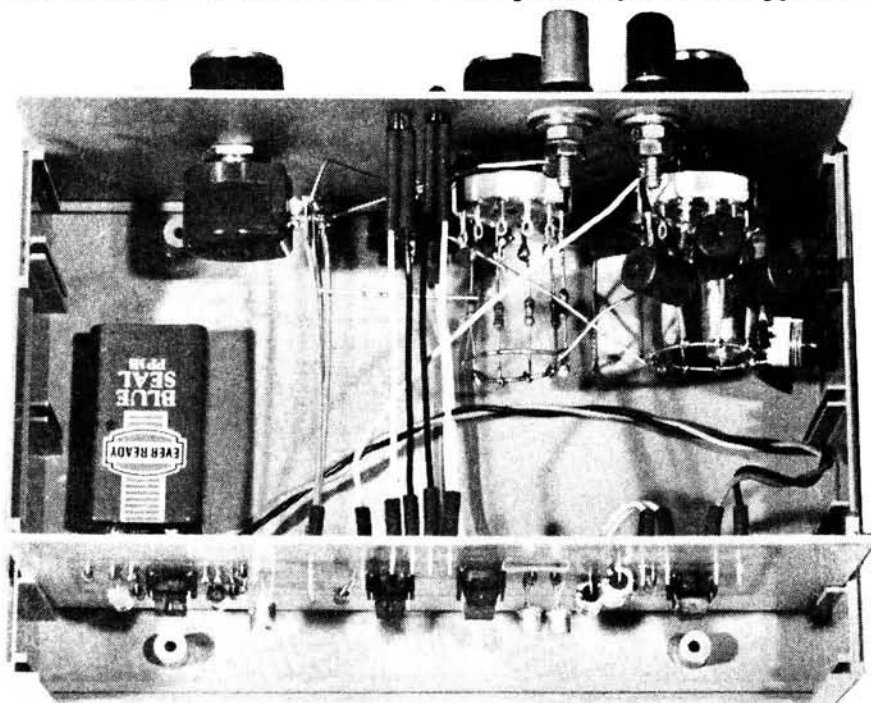

Interior view showing range of switch wiring and layout



## Calibration

The calibration depends on the pointer knob being in the correct position on the potentiometer spindle. The easiest way to achieve this is to take two 1% 10kΩ resistors and connect one to the UNKNOWN terminals and the other to the EXT terminals. Switch S1 to L&C and S2 to EXT. Adjust the ratio potentiometer R8 for balance, loosen the pointer knob and re-tighten so that the pointer is on "1". Change over the two 10kΩ resistors and if necessary readjust the potentiometer for balance. If there is a slight difference then reset the pointer to a position midway between this position and "1". The knob setting is now complete.

To calibrate the 100pF range, switch S1 to L&C and S2 to 100pF. Connect a 100pF 1% (silvered mica) capacitor to the UNKNOWN terminals and set the ratio potentiometer to "1". Using an insulated trimming tool adjust the trimming capacitor (part of Cs5) for balance. This completes the calibration.

## Using the PW "Itchen"

In normal use, the component to be tested is connected to the UNKNOWN terminals. It should be free of all other connections and the connecting leads kept as short as possible, particularly when measuring small values of capacitance. Set the Range switches to R or L&C as required (for R the L&C knob must be set to the "3 o'clock" position and for L&C the R knob to the "9 o'clock" position) and search for a balance point by rotating the ratio control over the whole of its range. If the balance is at one end, try changing the decade range to bring the balance point to within the 0.1 to 10 part of the scale. Note the scale reading at balance and multiply this by the range switch position to obtain the value of the component. If the component under test contains both reactive and resistive components, e.g. a very leaky capacitor, then, depending on the actual values, the balance of the bridge may become less sharp and there may also be some error in the reading.

The EXT terminals may be used by switching the L&C switch to EXT. In this position an external standard may be connected, the scale then indicates the ratio of the UNKNOWN to the external standards. It should be borne in mind that the oscillator, driving the bridge, has only a limited amount of power available and will become distorted should the external standard have a resistance or reactance of less than about 100Ω at 1.6kHz.

An additional use for the EXT facility is in matching components. Two components are connected to the EXT and UNKNOWN terminals and the difference can be read from the ratio scale. Differences of less than 0.5 per cent can easily be measured by this method.

## Computer Generation of the Ratio Scale

The calibration of the ratio scale for the PW "Itchen" was calculated on a BBC B using the program given here.

```
100 REM WHEATSTONE BRIDGE
110 REM RATIO DIAL
CALIBRATOR
120 REM GW3JGA
130 RESTORE
140 INPUT "INPUT TOTAL
```

```
DEGREES" T
150 DATA
.01,.05,1,.15,2,.25,3,4,5,6,7,8,9
160 DATA
1,0,1,1,1,2,1,3,1,4,1,5,2,2,5,
3,4,5,6,7,8
170 DATA 9,10,15,20,50,100,-1
180 PRINT "RATIO", "DEGREES"
190 READ R
200 IF R=-1 THEN END
210 LET A=((T/(1+R))*R)-(T/2)
220 LET A=INT(A*10)/10
230 PRINT R,A
240 GOTO 190
```

Typical results:

INPUT TOTAL DEGREES ? 300

RATIO	DEGREES
1E-2	-147.1
5E-2	-135.8
0.1	-122.8
0.15	-110.9
0.2	-100.1
0.25	-90
0.3	-80.8
0.4	-64.3
0.5	-50
0.6	-37.5
0.7	-26.5
0.8	-16.7
0.9	-7.9
1	0
1.1	7.1

RATIO	DEGREES
1.2	13.6
1.3	19.5
1.4	25
1.5	30
2	50
2.5	64.2
3	75
4	90
5	100
6	107.1
7	112.5
8	116.6
9	120
10	122.7
15	131.2
20	135.7
50	144.1
100	147

## SHOPPING LIST

### Resistors

0.25W 5% Carbon Film

470R	2	R12,13
3.3k	2	R6,7
33k	1	R1
100k	6	R2,3-5,10,11
10MΩ	1	R9

0.25W 1% Metal Film

100R	1	Rs5
1kΩ	1	Rs4
10k	1	Rs3
100k	1	Rs2
1MΩ	1	Rs1

1W Wire-wound Potentiometer

10k	1	R8 (RS 173-237)
-----	---	-----------------

### Capacitors

Silvered Mica

68pF	1	Cs5 (part)
100pF	1	for calibration purposes
1nF	1	Cs4

Polystyrene 2.5%

10nF	1	Cs3
------	---	-----

Polyester Film 5/10%

1nF	2	C1,2
100nF	1	Cs2 (5% preferred)
1μF	1	Cs1 (5% preferred)

Axial Electrolytic 16V

10μF	2	C3,4
------	---	------

Miniature Foil Trimmer

5.5-65pF	1	Cs5 (part) (RS 125-660)
----------	---	-------------------------

### Inductors

5/10% (5% preferred)

1mH	1	Ls1 Toko
		181LY-102
10mH	1	Ls2 Toko
		181LY-103
100mH	1	Ls3 Toko
		181LY-104

### Semiconductors

Diodes

Red l.e.d	2	D5,6
1N4148	4	D1-4

Transistors

BC108	8	Tr1,3,4
BC178	1	Tr2

Integrated Circuits

CA3140	3	IC1-3
4070	1	IC4

### Miscellaneous

Cabinet Vero 202-21039N (Maplin Verobox 216 Order Code LQ09K) (1); p.c.b. (1); double ended pins (12); insulated 4mm terminals (4); knobs (3); battery connector (1); PP3 battery (1); 20 s.w.g. tinned copper wire; S1,2 1p 12w rotary (2); S3 s.p.s.t. min toggle (1).

Toko Inductors from Bonex Ltd., 102 Churchfield Road, Acton, London W3 6DH.

The method may be of use to constructors who wish to use an alternative type of wire-wound potentiometer having a different number of degrees of electrical rotation.


1. Determine the number of degrees of electrical rotation by mounting the potentiometer on a flat panel or piece of card and fitting it with a knob and pointer. Connect an ohmmeter between the slider connection and one end of the resistive track and determine the point at which the resistance is at zero—this is usually a few degrees before the mechanical limit of rotation. Mark this position on the panel. Repeat for the other end of the track and mark the panel again.

2. Using a protractor, measure the number of degrees of electrical rotation.

3. Load and run the program, enter the total number of degrees when requested.

4. The program prints a list of ratios from "0.01 to 1" through unity and up to "10 to 1" with their degree positions relative to the electrical centre of rotation.

5. Now comes the tedious bit! Draw a circle on a sheet of paper the same size as the scale arc and, using a protractor, mark in all the ratio points working both ways from the top centre position. If you have access to a photocopier that can reduce originals, then it

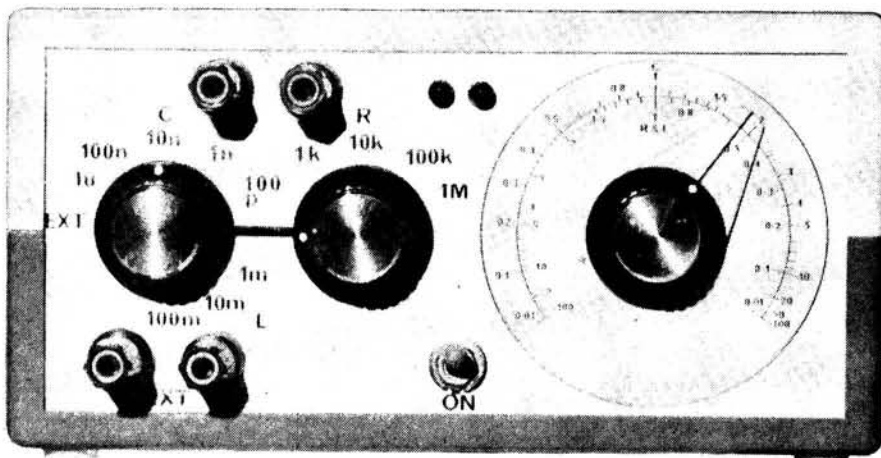

is easier to work to twice the required size and reduce it afterwards.

6. Place a sheet of drafting film over the drawing and draw, using black ink, the arc and ratio points. Label the tracing using press-on lettering and photocopy on to plain paper (reducing if necessary). cut out and mount the scale as described previously.

### References

*Electronic Measurements*, Terman & Pettit, McGraw Hill. (a.c. Wheatstone Bridges). p.69.

*A Capacitance and Resistance Bridge*, J. T. Lawrence, *Practical Wireless*, Nov. 1970, p.548.

Completed instrument showing front panel markings



# The SHORT WAVE Magazine

## MARCH 87 ISSUE

### FEATURED ARTICLES

#### 50 years of SWM

George Dobbs G3RJV Describes the SWM-50 All-Wave Receiver

Transmitting Antennas for Small Gardens by D. Pritchard

### REGULAR FEATURES

Practically Yours – Oblast Corner – SWL – Club Round-up  
Communications and DX News – VHF Bands plus Index to Vol. 44

**ORDER YOUR COPY NOW FROM YOUR LOCAL NEWSAGENT  
ON SALE 27 FEBRUARY**

# Antenna Radiation Patterns Computerised-3

by Dr. L. W. Brown G0FFD and F. C. Judd G2BCX.

The first two parts of this series have included about a dozen different radiation patterns produced by the computer and another selection will be featured in the fourth part. In this part we will deal with the "mathematical" formation of antenna radiation patterns and how the computer can be programmed to draw these patterns for us.

It does not require lengthy and difficult programs to get the computer to draw antenna radiation patterns. Indeed some of the programs consist of only a few entries as will be illustrated. It should be mentioned that the radiation pattern print-outs shown so far in these articles have been graphically enhanced so the programs for producing them were a little more complex.

To show how a computer can be used to draw antenna polar diagrams we take the familiar example of the radiation in the horizontal plane from a vertical dipole with a reflector spaced a quarter-wavelength away as shown in Fig. 3.1. A wave arriving at the reflector from the driven element will, because it has travelled a distance of  $\lambda/4$ , be 90 degrees out of phase with its incident radiation. Thus the re-radiation from the reflector is, in total,  $90 + 180 = 270$  degrees out of phase with that being radiated by the driven element.

At a large distance from the driven element and reflector (such that the signals from both can be regarded as

parallel), the radiation from the reflector has travelled the extra distance  $d$  as shown in Fig. 3.1, and therefore suffers a further phase delay of a fraction of  $d/\lambda$  of one cycle, i.e.  $360 \times d/\lambda$ . From the geometry of Fig. 3.1,  $d$  evidently equals  $\lambda/4 \times \cos(A)$ . This further phase delay thus becomes:

$360 \times d/\lambda = 90 \times \cos(A)$  degrees and the total phase difference at the distant point between the radiation from the driven element and its reflector is the above 270 degrees plus this further quantity i.e.

$$270 + 90\cos(A) \text{ degrees.}$$

The net effect at the distant receiving antenna is the algebraic sum of two radiations having this phase difference.

Reference to books on trigonometry will reveal that the sum of two signals of the same amplitude ( $E$ ) and frequency, but with this phase difference, results in a net signal amplitude of

$$E \cos(\frac{1}{2}(270 + 90\cos(A)))$$

The polar diagram is the graphical plot of the variation of this quantity with the angle  $A$ .

## The Computer Program

The listing below is a very simple program which causes the computer to plot a polar diagram resulting from the above in a matter of seconds. In fact it

takes only a few moments to actually enter the listing.

```
10 CLS : DEG : ORIGIN 320,100
20 FOR A=0 TO 360
30 R=ABS(E*COS(135+45*COS(A)))
40 PLOT R*SIN(A), R*COS(A)
50 NEXT
```

Line 10 clears the screen, sets the computer to "degrees" and puts the polar diagram in a suitable position on the v.d.u. The "loop", Lines 20 to 50, then plots the polar pattern on the screen. The listing shown is for the Amstrad CPC464 BASIC, but with very little change can be readily adapted for BBC, Commodore and Sinclair users. The Amstrad screen is 640 pixels wide  $\times$  400 pixels deep, hence the numerical values given to the origin. So ( $E$ ) in Line 30 should be given a numerical value to suit the size of the screen. A print-out from this program is shown in Fig. 3.2.

By itself the vertical dipole in the above example radiates equally in all directions in the horizontal plane, i.e. it is omni-directional. If, instead of the vertical dipole and reflector we were using a horizontal dipole and reflector, as in Fig. 3.3, then the program for a polar diagram for this will need to be modified to take into account the fact that the dipole no longer radiates equally in all directions as it does when vertical. This is done by multiplying the polar diagram of the combination by the polar diagram of the dipole alone, the latter being the well known cosine (figure-of-eight) pattern. The listing for a horizontal dipole and reflector thus becomes;

```
10 CLS : DEG : ORIGIN 320,100
20 FOR A=0 TO 360
30 R=ABS(E*COS(A)*COS
(135+45*COS(A)))
40 PLOT R*SIN(A), R*COS(A)
50 NEXT
```

in which ( $E$ ) of the previous listing has been replaced by  $E \times \cos(A)$  to cater for the polar diagram of the dipole alone. It may be seen from the print-

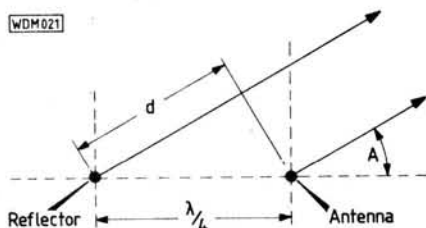


Fig. 3.1




Fig. 3.2

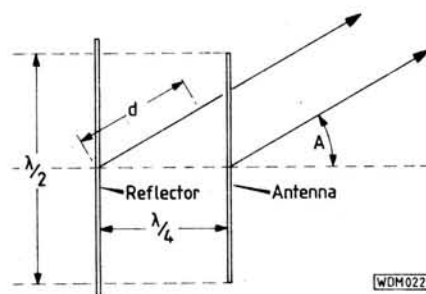


Fig. 3.3





# HF Band Antenna for Difficult Locations Part 3

*In the final part of this series F. C. Judd G2BCX looks at discreet antennas and loops and suggests some further reading.*

A reasonable proposition if you have a detached two-storey house or the same semi-detached house and are prevented by local restrictions from putting up masts is a wire "loop" all round the house as high as possible—part way round with a semi-detached house, of course. Close proximity to walls, behind which are bound to be electric light cables and water pipes, may have some detrimental effects but better a not-quite-so-good antenna than a very poor one, or none at all. The general idea is illustrated in Fig. 3.1a and 3.1b. To make the antenna as inconspicuous as possible, the wire need be only 18 or 20s.w.g. or equivalent. Good insulation on entry to the shack is essential especially if the antenna is to be operated harmonically and will, therefore, be voltage fed.

The same idea could well be applied to a bungalow, Fig. 3.1c by placing the antenna support brackets upward instead of outward. For the benefit of the curious it could be described as a special lightning conductor, or a device to break up snow falling from the roof in winter!

## A Discreet Antenna

This is just a simple practical idea that offers the possibility of a temporary arrangement that probably won't excite the neighbours or the local planning authorities. It would at least suffice until some permanent arrangement could be established. The "discreet antenna" may be about 40m long and consist of a very thin gauge wire strung between a tree, or a self-supporting mast and a high point on the house. End fed from a suitable a.t.u. it could be made to operate on a number of bands harmonically. This would mean voltage fed at high impedance for 3.5MHz and above, so good insulation will be necessary at the point of entry to the shack and at the far end. At 1.8MHz the antenna would be current fed and behave more or less as a quarter-wave tuned against ground, so once again a good earthing system is required. It would be advisable to tie some corks, or pieces of coloured plastics ribbon at intervals along the wire to prevent birds flying into it and suffering damage to themselves. This will, of course, make the

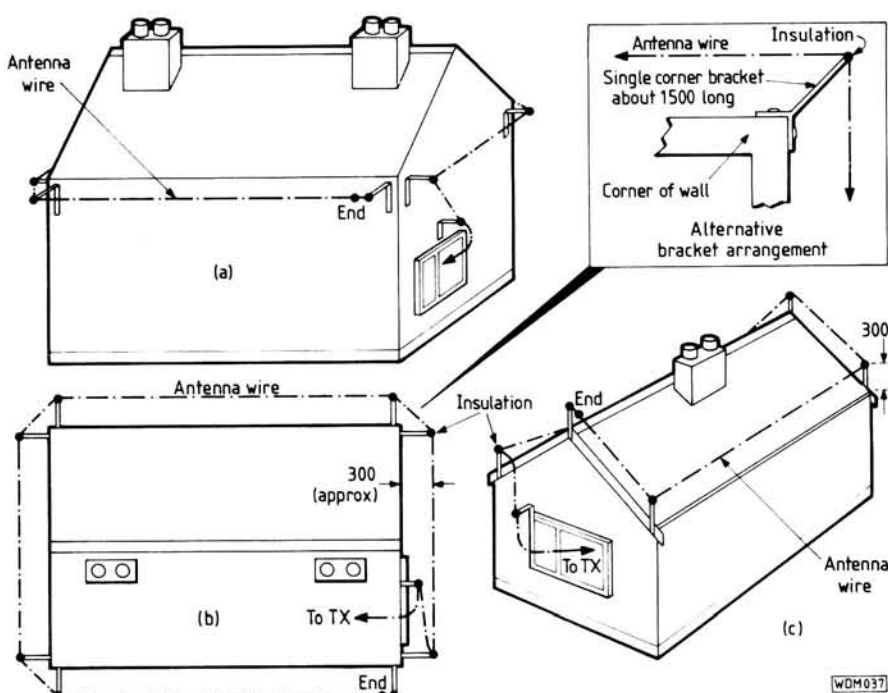


Fig. 3.1: How to loop an antenna around the house

neighbours aware that something is suspended across your garden but may keep them guessing for a while, at least until the planning authorities say "yea or ney" to a fully fledged antenna system.

## Small Loop Antennas

These are intended for use on the higher frequencies, e.g. 21 and 28MHz, and could be accommodated in a fairly large loft.

A complete loop antenna is, in effect, a closed circuit using a single conductor of one or more turns looped so that its two ends meet. Loop antennas may take two different forms.

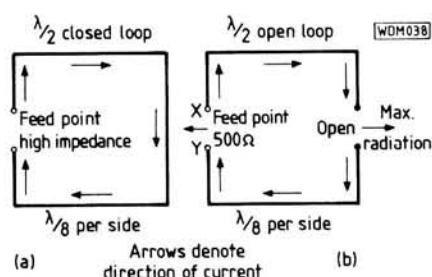


Fig. 3.2: A suitable loop for 21 or 28MHz

One where the total conductor length and maximum linear dimensions of a turn are small compared with the wavelength, and the other where these become comparable with the wavelength. Unfortunately such loops are large at the lower frequencies and are also directional. About the smallest practical loop, which is also the basis of the "quad" antenna, is a square with sides  $\lambda/4$  long.

Loop antennas of this nature are more suited to 21 or 28MHz but could be accommodated in a loft. The smallest that might be considered has a total conductor length of  $\lambda/2$  making each side  $\lambda/8$  long. Unfortunately a completely closed loop of this size (Fig. 3.2a) has a very high impedance input but can be fed as a low impedance device providing it is open at the top as shown in Fig. 3.2b. The radiation resistance at a current anti-node, as at X-Y, which is also the impedance, is approximately 50 ohms. Maximum radiation is in either direction parallel to the plane of the loop as in Fig. 3.2c. The small size results in a loss of about 1dB with reference to a dipole when the field from such a loop is compared with maximum radiation from a dipole in either of its two directions.

## One Wavelength Loops


Loops in which the conductor length is one wavelength— $\lambda/4$  per side if square—have characteristics that are different to those of half-wave loops. Three different loop systems are shown in Fig. 3.3 with (a) and (b) having a square format whilst (c) is triangular, an upturned delta, and with each side  $\lambda/3$ . The directional characteristics of these loops are opposite to those of a small loop, i.e. the radiation is maximum perpendicular to the plane of the loop. If the loops (a) and (b) are mounted vertically, with the feed point at the bottom, the radiation is horizontally polarised. If the loop is orientated so that the feed point is on one side then the radiation will be vertically polarised.

The total electrical length of a one wavelength loop is shorter than an equivalent straight wire for the same wavelength. For loops operating in the region of 28 to 30MHz, and where the ratio of the conductor length to wire diameter is large, the loop resonance will be:

$$\text{Length (metres)} = 306.3/f \text{ (MHz)}.$$

The radiation resistance of a resonant one wavelength is approximately 100 ohms so a matching device would be needed with a 50 ohm feed. Maximum radiation is broadside to the plane of the loop and about 2dB greater than that from a dipole.

The upturned delta loop Fig. 3.3c has a slightly lower feed impedance than the square loops but similar radiation characteristics. It can be com-

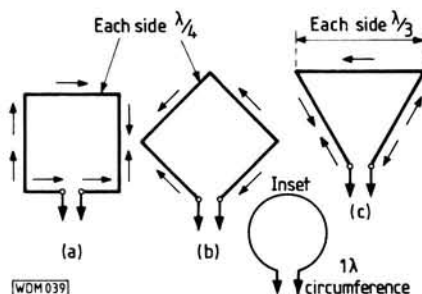


WDM039

Fig. 3.3: Three different loop systems

pared with another to provide a two-band arrangement, e.g. for 21 and 28MHz. Radiation patterns (horizontal mode) for these loop antennas are shown in Fig. 3.4.

## Other Antennas for Restricted Space

In this part most emphasis has been placed on the "harmonic" type of antenna which lends itself to installation where space is limited because it can be made to operate on a number of h.f. bands. Multi-band verticals have been mentioned although planning permission may be needed to put one up in a garden. Loop antennas as in

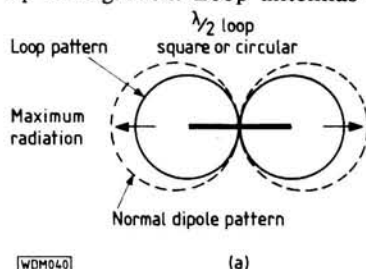

WDM040

(a)

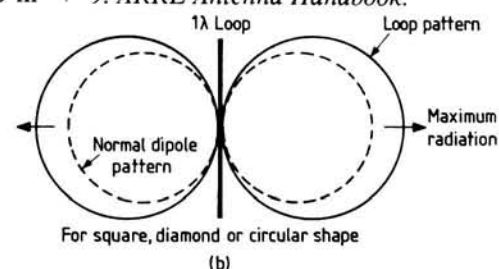


Fig. 3.4

Fig. 3.2 and 3.3 that could be used indoors in a large loft space, offer possibilities for the highest h.f. bands only. However, there are many more that might be better suited to particular situations, far too many to include in this series. References to publications containing details of antennas for restricted spaces, as well as other relative information are listed below.

PW

## Further Reading

1. Delta Beams for 10 & 15 Metres. GW2DDX, PW, March 81.
2. DX Dipole for Restricted Sites. G3XAA, PW, March 82.
3. Mini-X Beam for 10 Metres. GW2DDX, PW, March 82.
4. Antennas, Part 5. G2BCX, PW, 83. (General information. Harmonic Antennas.)
5. An ATU for Low Power. (1.8 to 30MHz). G4FAI, PW, April 83.
6. Aerial Tuner. G3OGR. *Out of Thin Air*, PW Publishing. (All h.f. Bands.)
7. Aerials for 160 Metres. G3WVR. *Out of Thin Air*. (Fair amount of space needed but interesting possibilities.)
8. *HF Antennas for All Locations*. G6XN. RSGB.
9. *ARRL Antenna Handbook*.

## SWAP SPOT

Got a camera, want a receiver? Got a v.h.f. rig, want some h.f. gear to go with your new G-zero? In fact, have you got anything to trade radio-wise?

If so, why not advertise it FREE here. Send details, including what equipment you're looking for, to "SWAP SPOT", *Practical Wireless*, Enefco House, The Quay, Poole, Dorset BH15 1PP, for inclusion in the first available issue of the magazine.

A FEW SIMPLE RULES: Your ad. should follow the format of those appearing below, it must be typed or written in block letters; it must be not more than 40 words long including name and address/telephone number. Swaps only—no items for sale—and one of the items MUST be radio related. Adverts for ILLEGAL CB equipment will not be accepted.

The appropriate licence must be held by anyone installing or operating a radio transmitter.

Have Sharp GF-780D double deck tape hi-fi, detachable speaker with search system and five band graphic equaliser, Dolby. As new boxed worth £285. Would exchange for FRG-7700 receiver, must be in good condition. Tel: 08357 314. C240

Have Epson PX-8 CP/M B4K portable computer with software; BASIC, Cardbox and Kermit—hardly used. Would exchange for Yaesu FT-101ZD or any other h.f. transceiver. If not any h.f. RX like Trio R2000 or FRG-7700 or even an AR2002 scanning RX. S. Jacob, YMCA, Stockwell Road, London SW9 9ES. Tel: 01-274 3901 or 8560. C241

Have communications receiver, 75kHz–18.5MHz, R1155, mains operated, b.f.o., audio filter etc., working well and worth £48. Would exchange for signal generator or Sinclair computer. G4FFO. Tel: Cambridge 860150. C246a

Have QRO 10GHz klystron, 74mW. Would exchange for signal generator. G4FFO. Tel: Cambridge 860150. C246

Have JVC radio-TV-cassette recorder; f.m., s.w., m.w., TV-v.h.f., TV-u.h.f. In good condition, suitable for TV DX. Would exchange for

CR100 communications receiver, must be unmodified and in good condition. Tel: 08357 314. C278

Have FT-230R. Would exchange with cash adjustment for FT-757GX or TS-130S. Declan Farnan, 230 Castle Park, Galway, Eire. C322

Have two Pye Westminster radio sets, 25 watts. Would exchange for any decent airband radio (preferably handheld). Tel: Tony, 061-969 2693. C323

Have Marconi V2A long range model. Would exchange for B2 spy set. Tel: Medway 253056 evenings. C342

Have personal hi-fi, valves, book, u.h.f. and v.h.f. antennas for your area, would exchange for "Crown" (Japanese) 5in b/w portable TV radio. Preferably working model 5TV 65R. Rob Mannion GM3XFD. Badcaul House, Dundonnell, Ross-shire IV23 2QY. C364

Have 22in racing frameset, Raleigh Prestige, 531C Reynolds tubing throughout Campagnolo lugs, dropouts and forkends. Would exchange for old type h.f. transceiver or Belcom LS102 or w.h.y. Paul, Canterbury 455052. C365

Have Blaupunkt "New York" car radio cassette system, including six speakers, graphic equaliser and 80 watt amplifier, superb finest top quality system, cost over £900. Also have 9in monitor as new. Would exchange for h.f. linear or any amateur radio equipment. McCallum G4VNG. Tel: 0733 231639. C370



# Practical Wireless BOOK SERVICE

The books listed have been selected as being of special interest to our readers.  
They are supplied from our editorial address direct to your door.

## DATA & REFERENCE

### DIGITAL IC EQUIVALENTS AND PIN CONNECTIONS

A. Michaels

Shows equivalents and pin connections of a popular selection of European, American and Japanese digital i.c.s. Also includes details of packaging, families, functions, manufacturer and country of origin.  
256 pages **Order code BP140 £5.95**

### LINEAR IC EQUIVALENTS AND PIN CONNECTIONS

A. Michaels

Shows equivalents and pin connections of a popular selection of European, American and Japanese linear i.c.s. Also includes details of functions, manufacturer and country of origin.  
320 pages **Order code BP141 £5.95**

### INTERNATIONAL TRANSISTOR EQUIVALENTS GUIDE

A. Michaels

Helps the reader to find possible substitutes for a popular selection of European, American and Japanese transistors. Also shows material type, polarity, manufacturer and use.  
320 pages **Order code BP85 £3.50**

### INTERNATIONAL DIODE EQUIVALENTS GUIDE

A. Michaels

Designed to help the user in finding possible substitutes for a large selection of the many different types of semiconductor diodes that are available. Besides simple rectifier diodes, also included are Zener diodes, i.e.d.s, diacs, triacs, thyristors, o.c.i.s, photo and display diodes  
144 pages **Order code BP108 £2.25**

### NEWNES RADIO AND ELECTRONICS ENGINEER'S POCKET BOOK

Keith Brindley

This 16th edition gives a wealth of useful data covering maths, abbreviations, codes, symbols, frequency bands and allocations, UK broadcasting stations, transistors, diodes and i.c.s, time, components, and much more.  
(Hardback)  
170 pages **Order Code HN01 £5.50**

## PROJECT CONSTRUCTION

### HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s

R. A. Penfold

Chapter 1 deals with the simple methods of copying printed circuit board designs from magazines and books and covers all aspects of simple p.c.b. construction as comprehensively as possible.

Chapter 2 covers photographic methods of producing p.c.b.s and Chapter 3 deals with most aspects of designing your own printed circuit board layouts.  
80 pages **Order code BP121 £1.95**

### INTRODUCING QRP

Collected Articles from PW 1983-1985

An introduction to low-power transmission, including constructional details of designs by Rev. George Dobbs G3RJV for transmitters and transceivers from Top Band to 14MHz, and test equipment by Tony Smith G4FAL.  
64 pages **Order Code QRP £1.50**

### PRACTICAL POWER SUPPLIES

Collected Articles from PW 1978-1985

Characteristic features of batteries, transformers, rectifiers, fuses and heatsinks, plus practical designs for a wide variety of mains-driven power supplies, from a small battery eliminator to the PW "Marchwood", a fully stabilised and protected unit giving a nominal 12V d.c. output at up to 30 amps continuous.

48 pages **Order Code PPS £1.25**

## RADIO

### COMMUNICATION

(Elements of Electronics—Book 5)

F. A. Wilson

Looking at electronics fundamentals over the whole of the communication scene, this book aims to teach the important elements of each branch of the subject in an interesting and practical style. Line, microwave, submarine, satellite, digital multiplex, radio and telegraphy systems are covered, without getting involved in the more complicated theory or mathematics.

This is not an expert's book, neither is it for those looking for the easy way—it aims to leave the reader knowledgeable and with a good technical understanding of this extensive subject.

256 pages **Order code BP89 £2.95**

### AN INTRODUCTION TO RADIO DXING

R. A. Penfold

Anyone can switch on a short-wave receiver and play with the controls until they pick up something, but to find a particular station, country or type of broadcast and to receive it as clearly as possible requires a little more skill and knowledge. The object of this book is to help the reader do just that, which in essence is the fascinating hobby of radio DXing.

112 pages **Order code BP91 £1.95**

### INTERNATIONAL RADIO STATIONS GUIDE

Completely revised and updated in 1985, this book is an invaluable aid in helping all those who have a radio

receiver to obtain the maximum entertainment value and enjoyment from their sets.

Clearly shown are the station site, country, frequency and/or wavelength, and the effective radiated power of the transmitter. The book covers Europe, the Near East and N. Africa, the USA, Canada, Latin America and the Caribbean, plus short-wave stations worldwide. There is also a list of English language broadcasts.  
128 pages **Order code BP155 £2.95**

### A TV-DXERS HANDBOOK

R. Bunney

A fully revised and updated version of this popular "bible" for TV enthusiasts, whether established or beginners. Includes information on transmission standards, propagation, receivers including multi-standard, colour, satellites, antennas, photography, station identification, interference, etc.  
87 pages **Order Code BP176 £5.95**

### QUESTIONS & ANSWERS AMATEUR RADIO

F. C. Judd G2BCX

Revised in 1986, this little book tells how amateur radio developed and what it has to offer. It then describes the form of the Radio Amateurs' Examination and Licence, the technology, equipment, antennas, operating procedure and codes used by amateurs, rounding off with a chapter on radio wave propagation and an appendix of useful information.  
122 pages **Order Code HN02 £2.95**

### QUESTIONS & ANSWERS RADIO

Eugene Trundle

This book describes for the beginner, in simple question and answer format, the basics of electrical theory, radio and semiconductors, then looks at radio receivers, CB and amateur radio, and test equipment.  
110 pages **Order Code HN03 £2.95**

### FOUNDATIONS OF WIRELESS AND ELECTRONICS (10th Edition)

M. G. Scroggie and S. W. Amos

For the serious student, this latest edition of a famous volume covers d.c. and a.c. circuits, inductance, capacitance, tuned circuits and selectivity, valves, semiconductors, transmission lines, antennas, radiation, oscillation, modulation, detection, amplification, superhet receivers, cathode ray tubes, waveform generators and switches, computers and power supplies. Useful appendices on algebra, graphs, technical terms, symbols, abbreviations and decibels complete the book.  
551 pages **Order Code HN04 £8.95**

### PASSPORT TO AMATEUR RADIO

Reprinted from PW 1981-1982

Many thousands of successful RAE candidates have used this series, written by John Thornton-Lawrence GW3JGA, as an aid to their studies. Reprinted here along with a collection of other useful articles for students of amateur radio.  
96 pages **Order Code PPAR £1.50**

### INTRODUCING MORSE

Collected Articles from PW 1982-1985

This collection of articles looks at ways of learning the Morse Code, followed by constructional details of a variety of keys including lambic, Triambic, and an Electronic Bug with a 528-bit memory.  
48 pages **Order Code MORSE £1.25**

### INTRODUCING RTTY

Collected Articles from PW 1980-1983

A series of articles by Jeff Maynard G4EJA explains what RTTY is, and describes various methods of generating and decoding it. Then follows constructional details of how to use a Sinclair 16K ZX81 as a simple and inexpensive way of getting going on RTTY. Definitely not a state-of-the-art system, but enough to let you find out whether the mode appeals to you, without first spending a fortune.  
33 pages **Order Code RTTY £1.00**

## ANTENNAS (AERIALS)

### AERIAL PROJECTS

R. A. Penfold

The performance of any receiver will ultimately depend on the aerial to which it is connected. This book considers practical designs including active, loop and ferrite aerials which give good performance and are relatively simple and inexpensive to build. The complex theory and mathematics of the subject have been avoided.

Also included are constructional details of accessories including a preselector, attenuator, filters and a tuning unit.

96 pages **Order code BP105 £1.95**

### SIMPLE AMATEUR BAND AERIALS

E. M. Noll

This concise book describes how to build 25 simple and inexpensive aerials, ranging from a simple dipole through beam and triangle designs to a mini-rhombic made from four TV masts and about 120 metres of wire.

Tables of dimensions are given to design aerials for specific spot frequencies, including the WARC bands.  
80 pages **Order code BP125 £1.95**

### 25 SIMPLE SHORT WAVE BROADCAST BAND AERIALS

E. M. Noll

Fortunately good aerials can be erected at low cost, and for a small fraction of the cost of your receiving equipment. This book describes 25 different aerials,

ranging from a simple dipole through helical designs to a multi-band umbrella.

80 pages **Order code BP132 £1.95**

### 25 SIMPLE INDOOR AND WINDOW AERIALS

E. M. Noll

Written for people who live in flats or have no gardens, or who have other space-limiting restrictions which prevent them from constructing a conventional aerial system. The 25 aerials included in this book give surprisingly good results considering their limited dimensions.  
64 pages **Order code BP136 £1.75**

### 25 SIMPLE TROPICAL AND MW BAND AERIALS

E. M. Noll

Shows you how to build 25 simple and inexpensive aerials for operation on the medium wave broadcast band and on the 60, 75, 90 and 120 metre Tropical bands. Designs for the 49 metre band are included as well.

64 pages **Order code BP145 £1.75**

### OUT OF THIN AIR

Collected Antenna Articles from PW 1977-1980  
Including such favourites as the ZL Special and '2BCX 16-element beams for 2m, and the famous 'Slim Jim', designed by Fred Judd G2BCX. Also features systems for Top Band, medium wave/long wave loop designs and a v.h.f. direction finding loop. Plus items on propagation, accessories and antenna design.  
80 pages **Order Code QOTA O/S**

### WIRES & WAVES

Collected Antenna Articles from PW 1980-1984  
Antenna and propagation theory, including NBS Yagi design data, and constructional details on a variety of antennas from medium waves to microwaves, plus accessories such as a.t.u.s., s.w.r. and power meters, and a noise bridge. Advice on tracing and curing interference both to and from TV receivers.  
160 pages **Order Code W & W £3.00**

## AUDIO FREQUENCIES

### AUDIO

(Elements of Electronics—Book 6)

F. A. Wilson

This book studies sound and hearing, and examines the operation of microphones, loudspeakers, amplifiers, oscillators, and both disc and magnetic recording. Intended to give the reader a good understanding of the subject without getting involved in the more complicated theory and mathematics.

320 pages **Order code BP111 £3.50**

## THEORY & CALCULATIONS

### PRACTICAL ELECTRONICS CALCULATIONS AND FORMULAE

F. A. Wilson

A book for the workbench, covering units and constants, d.c. and a.c. theory, passive components, networks, theorems and measurements. Its aim is to bridge the gap between complicated theory and the "cut-and-try" methods which may bring success in design but leave the experimenter unfulfilled.

Tedious higher mathematics have been avoided where possible. Instead there is a strong practical bias with many tables included to save calculation whilst giving greater intimacy with the design process.  
256 pages **Order code BP53 £2.95**

### THE SIMPLE ELECTRONIC CIRCUIT AND COMPONENTS

(Elements of Electronics—Book 1)

F. A. Wilson

The first book to appear in this excellent series which aims to fill the divide between the simpler basic textbook and the more advanced treatise steeped in higher mathematics.

This volume contains all the fundamental theory necessary to lead to a full understanding of the simple electronic circuit and its main components.  
224 pages **Order code BP62 £2.95**

## COMPUTING

### MICROPROCESSING SYSTEMS AND CIRCUITS

(Elements of Electronics—Book 4)

F. A. Wilson

A truly comprehensive guide to the elements of micro-processing systems which really starts at the beginning. Teaches the reader the essential fundamentals that are so important for a sound understanding of a subject which is becoming ever more involved in radio systems and equipment.  
256 pages **Order code BP77 £2.95**

### AN INTRODUCTION TO COMPUTER PERIPHERALS

J. W. Penfold

Covers such items as monitors, printers, disk drives, cassette recorders, modems, etc., explaining what they are, how to use them and the various types and standards. Helps you to make sure that the peripherals you buy will work with your computer and with each other.  
80 pages **Order code BP170 £2.50**

## AN INTRODUCTION TO COMPUTER COMMUNICATIONS

R. A. Penfold

Provides details of the various types of modem and their suitability for specific applications, plus details of connecting various computers to modems, and modems to the telephone system. Also information on common networking systems and RTTY.

96 pages Order code BP177 £2.95

## FAULT-FINDING

### TRANSISTOR RADIO FAULT-FINDING CHART

C. E. Miller

Used properly, should enable most common faults to be traced reasonably quickly. Selecting the appropriate fault description at the head of the chart, the reader is led through a sequence of suggested checks until the fault is cleared.

635 x 455mm approx. Order code BP70 £0.95

## HOW TO ORDER

O/S = Out of Stock

## ARE THE VOLTAGES CORRECT?

Reprinted from PW 1982-1983

Used by many individuals and training schools in the UK and overseas, this series teaches how to use a multi-meter to check through and fault-find on electronic and radio equipment, from simple resistive dividers through circuits using diodes, transistors, integrated circuits and valves.

44 pages Order Code ATVC £1.50

## QUESTIONS & ANSWERS

### RADIO REPAIR

Les Lawry-Johns

Repairing radio sets can be both a frustrating and rewarding occupation. The aspiring newcomer is first led gently through each stage of a selection of typical transistorised receiver circuits, followed by a more detailed look at car radios, noisy operation, valved radios and unit audio equipment. General notes on fault-finding and lists of tools and spare parts are also included.

106 pages Order Code HN05 £2.95

## OSCILLOSCOPES

### HOW TO USE THEM, HOW THEY WORK

Ian Hickman

Revised and updated in 1986, this book describes oscilloscopes ranging from basic to advanced models and the accessories to go with them. It then looks at how to use oscilloscopes, and some designed for special applications. Finally, how oscilloscopes work, dealing separately with the c.r.t. and the surrounding circuitry.

124 pages Order Code HN06 O/S

## SERVICING RADIO, HI-FI AND TV EQUIPMENT

Gordon J King

Intended for the more bridged student of radio repair, this book looks first at the characteristics of semiconductor devices from diodes to digital and analogue i.c.s. Then follow methods for d.c. and signal tests. Fault-finding techniques for audio, video, r.f. and oscillator stages and their application to transistor radios and hi-fi amplifiers, and servicing practice make up the remainder of this very practical book.

205 pages Order Code HN07 £7.95

## PRACTICAL HANDBOOK OF VALVE RADIO REPAIR

Chas E Miller


Despite the dominance of the "tranny" portable, many enthusiasts like to repair, restore and listen to the old valved broadcast receivers. This excellent book first describes the basic principles and development of valved radios, and then deals with practical repair work stage by stage on sets originating from the 1930s to the 60s. Appendices list intermediate frequencies used in a comprehensive list of receivers, and valve characteristic data and base connections.

230 pages Order Code HN08 £15.95 (Hardback)

## International Radio Stations Guide

EDITORIAL DEPT

## An Introduction to Computer Communications



## NEWNES RADIO and ELECTRONICS ENGINEER'S POCKET BOOK

## Audio

## Digital IC Equivalents and Pin Connections

ADRIAN MITCHELL

Add 75p per order postage (overseas readers add £1.50 for surface mail postage) and send a postal order, cheque or international money order payable to PW Publishing Ltd (quoting order code and quantities) to **Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP**. Payment by Access, Mastercard, Eurocard or Visa also accepted on telephone orders to Poole (0202) 678558. Books normally despatched by return of post but please allow 28 days for delivery.



0202 678558

Practical Wireless

0202 678558

# PCB SERVICE

Printed circuit boards for recent PW constructional projects are now available from the PW PCB SERVICE. The boards are fabricated in 1.5mm glass-fibre, and are fully drilled and roller tinned. All prices include VAT and postage and packing for UK orders. Add £2.00 per order for despatch to overseas addresses.

Orders and remittances should be sent to: **PCB Service, Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP**. Cheques should be crossed and made payable to Practical Wireless.

When ordering, please state the Project Title and Issue Month as well as the Order Code. Please print your name and address clearly in block capitals, and do not send any other correspondence with your order. You may phone your order using Access or Visa. A telephone answering machine will accept your order outside office hours.

Please allow 28 days for delivery. Always check the latest issue of PW for the current details of price and availability. Please enquire for earlier p.c.b.s.

PROJECT TITLE (Issue)	ORDER CODE	PRICE
PW Marchwood (7/83)	WR161	£3.32
Bug Key with Memory (10/84)	WR189/WR192	£10.35
PW Teme—TX (11/84)	WR196	£4.83
PW Teme—VFO/Doubler (12/84)	WA001	£3.76
PW Teme—RX (1/85)	WA002	£5.46
PW Triambic Keyer (2/85)	WAD280*	£4.26
FRG-7 BFO Mod (2/85)	WAD249	£4.00
PW Colne (4/85)	A004	£4.14
	A005	£4.08
PW Colne (5/85)	WR198	£5.01
PW Colne (6/85)	WR197	£4.97

Battery Charge Control (6/85)	WAD302	£3.94
Crystal Tester (7/85)	WR200	£3.43
Add-on BFO (8/85)	WR201	£3.42
UHF Prescaler (9/85)	WR202	£4.76
PW Meon 50MHz Transverter (10/85)	WR199	£8.28
Capacitance Meter (10/85)	WR203	£3.74
WQ MW Loop (11/85)	WR204	£3.45
RTTY/Morse Modem (1/86)	WR205	£6.73
	WR206	£3.78
Crystal Calibrator (1/86)	WR207	£2.90
Simple Audio Oscillator (3/86)	WR209	£5.50
RF Speech Processor (3/86)	WR208	£5.21
PW Meon Filter (4/86)	WR211	£4.04
PW Arun Parametric Filter (5/86)	WR210	£9.87
FRG-7 CIO Mod (6/86)	WR213	£3.61
Simple 50MHz Converter (9/86)	WR215	£4.86
NiCad Charger (10/86)	WR217	£3.30
Active Antenna (11/86)	WR216	£3.24
PW Taw VLF Converter (11/86)	WR222	£3.82
High Impedance MOSFET Voltmeter (12/86)	WR223	£3.82
Modifying the SRX-300 (12/86)	WR214	£3.99
Basic Wobulator (1/87)	WR224	£4.52
2m Mast-head Pre-amp (2/87)	WR218	£5.33
	WR219	£3.37
PW "Woodstock" (3/87)	WR225	£5.28
PW "Blandford" (4/87)	WR227a	£11.11
	WR226a	
	WR228	
PW "Itchen" (4/87)	WR298	£4.49



# PW REVIEW

*In the first part of his review of the Lowe HF-125 communications receiver, Geoff Arnold G3GSR looked at the background to the design, and at the circuit techniques employed. This month, he describes the controls in more detail, and also reports on how the receiver performed on an antenna and on the bench in the PW Test lab.*

Regular readers of my reviews will know that one thing which I always look for in a piece of radio equipment, particularly a receiver, is the ability to operate it in its basic form without having to read the handbook first. The HF-125 has been designed in such a way that this is perfectly possible.

Switch on, set the MODE switch according to the sort of station you want to listen to, turn the main tuning knob to give the required frequency on the l.c.d. readout (using the MHz UP/DOWN buttons as a band switch for large changes in frequency), set the VOLUME and TONE controls as desired. That's all there is to it! The MODE switch selects the optimum filter bandwidth automatically: c.w. and s.s.b. 2.5kHz; a.m. 7kHz; a.m.s. (synchronous a.m.) 4kHz; f.m. 12kHz. These are what a computer buff would call the default settings. You can select other filter bandwidths manually if you want to. The options are 2.5, 4, 7 or 10kHz on s.s.b. and a.m.; 400Hz or 2.5kHz on c.w. The button marked FILTER SELECT steps through the options at each push. If the MODE switch is moved to another position, the bandwidth returns to the default setting. On f.m., where the bandwidth is fixed, the FILTER SELECT button is used to switch the squelch circuit on and off.

Incidentally, in talking about the Detector option last month, a gremlin got at my w.p. keyboard. Synchronous a.m. and e.c.s.s. are **not** the same thing, as was implied there. In synchronous a.m., a carrier replacement oscillator in the receiver is phase-locked to the incoming carrier, and stays in lock for quite deep fades. In e.c.s.s., on the other hand, the normal carrier insertion oscillator provided for s.s.b. is used, and the operator has to adjust the receiver tuning to give exact zero-beat between the c.i.o. and the incoming carrier to achieve clear demodulation.

Using e.c.s.s. has the advantage that the receiver operates in the s.s.b. mode, and either sideband can be selected, for maximum freedom from interference. The accuracy achieved with manual tuning is satisfactory for speech reception, where the phasing between the carrier at the transmitter and at the receiver demodulator is not critical, and in fact frequency errors of up to around 100Hz are barely detectable unless you know the speaker at the distant transmitter. For the reception of music it's a different matter, as



anyone who's ever tried to listen to music on an s.s.b. receiver will know. The phasing between the various harmonic and non-harmonic component parts of a musical sound must be preserved if it is not to sound entirely different. To maintain that phasing, the carrier oscillator input to the receiver demodulator must be in phase with the transmitter carrier oscillator. The phase-locked oscillator in the synchronous a.m. detector option for the HF-125 ensures that this happens.

## Memories

To get back to the receiver controls, besides the FILTER SELECT and MHz UP/DOWN buttons already mentioned, there is a button which switches a 20dB r.f. attenuator into circuit in the receiver front end, and a MEMORY SELECT button. The FILTER, ATTENUATOR and MEMORY SELECT buttons operate in a similar way, in that the first push converts the l.c.d. frequency readout into a status display for the button, and subsequent pushes cycle the particular function through its options. In each case the l.c.d. reverts to displaying tuned frequency if no buttons are pressed for three seconds.

The MEMORY SELECT button allows the operator to review the contents of the fifteen memories in the primary bank (in other words, what frequencies they are storing) whilst still listening to the frequency selected with the main tuning knob. One disadvantage of using a rotary switch, rather than push-buttons, for the MODE control is that the mode cannot be controlled elec-

tronically, and therefore the memories cannot store the mode along with the frequency. The rotary switch was chosen by the designers because it is cheaper, being self-indicating.

To retune the receiver to one of the memory channels, one simply presses the RECALL button whilst the appropriate memory contents are being displayed. The receiver can then be tuned manually away from that frequency without altering the memory contents. To replace the current memory contents by the new frequency being displayed, press the MHz UP and DOWN buttons simultaneously to give the STORE function. The receiver can be returned from a memory channel to the original manually tuned frequency by pressing the RESTORE button.

Four special operating functions are available on the HF-125 by pressing **and holding** the MEMORY SELECT button whilst pressing one of the other buttons. These functions are:

1. Select alternate memory bank (memories A.01 to A.15)—press MEMORY SELECT and FILTER SELECT.
2. Revert to standard memory bank (memories 01 to 15)—press MEMORY SELECT and RF ATTEN.
3. Front panel control lock (disables tuning control and functions)—press MEMORY SELECT and MHz DOWN.
4. Control unlock (reverses above operation)—press MEMORY SELECT and MHz UP.

The front panel can also be unlocked by changing mode.

The optional Technical Manual for the HF-125 details yet another set of functions for the front panel controls which provide a self-diagnostic test



procedure, testing the m.p.u. system and its associated connections, providing alignment setting up signals, and testing the memories by filling them with alignment test frequencies. This feature means, according to the designers, that the initial alignment of the receiver can be completed in approximately three minutes, using a 50MHz frequency meter, a d.c. d.v.m., an h.f. signal generator and a SINAD meter.

The keypad option provides direct entry of tuned frequency in 1kHz steps, in addition to the standard tuning arrangements. The 12-button pad includes a \* (star) key to cancel incorrect entries, and a # (hash) key to enter or action the selected frequency when it is below 3MHz. The receiver is retuned automatically when the last digit is pressed for frequencies above 3MHz.

## Performance

The table of results of our laboratory tests shows that the pre-production model tested corresponded very closely with the manufacturer's specifications given in Part 1 of this review.

On-air testing of the receiver over all modes and bands gave generally very good results. The keyboard option for frequency entry is very useful, and is certainly something I would recommend. The automatic tuning rate ad-

justment for the main tuning knob I am less happy about.

To quote the User Manual: "The rate at which the receiver tunes when the tuning knob is rotated depends on the mode selected and on the speed of rotation of the knob . . . when the tuning knob is rotated rapidly the tuning rate increases. This allows a slow tuning rate for precise signal resolution coupled with the ability to reach the required frequency quickly. You may find at first that the receiver apparently 'jumps' in frequency when you are trying to tune a signal. This is because you have moved the tuning control quickly or in a jerky fashion and the receiver has increased its tuning rate. A smooth action will cure the problem . . .".

Well, I tried; believe me, I tried! The difficulty I found was that when searching a band, I would tune through a station, then stop and reverse towards the optimum point, whereupon the receiver tended to go to its high rate setting and shoot several kilohertz back past the wanted station. The tuning rate detector seems to be at its most sensitive when the direction of rotation of the tuning knob has just reversed. I very definitely feel that the detector needs to be made less sensitive, and I hope that the necessary change to the software can be made in the production models. It may then be

necessary to fit a heavier flywheel tuning knob than at present used.

The synchronous a.m. detector option gives a noticeable improvement in the quality and consistency of audio output from broadcast station signals suffering some types of selective fading, but for others the benefit is less marked.

Spurious signals did not prove a problem. The User Manual lists six frequencies which are "slightly stronger" than the receiver background noise, of which only one falls within a broadcast band (21.587MHz) and one within an amateur band (28.800MHz). I found one more, on 29.695MHz.

The receiver case is coated with a heavy-duty epoxy paint finish, and the front panel is made from a scratch-resistant polycarbonate material, with the panel legends printed on the reverse of the polycarbonate so that they won't wear off in use. The case is fitted with a retractable tilt-bail foot, to raise the front panel level, but I found that this was rather too high for convenient use.

The quality of the audio output, though not "hi-fi", is certainly good enough to warrant the use of a reasonable quality 4Ω external loudspeaker for broadcast band listening.

When operating the HF-125 from a mains p.s.u., it is essential to have an earth connected to the receiver

## ★ OUR LAB TESTS

**Sensitivity:** (10dB s/n)

c.w./s.s.b.		a.m. (70% mod.)		f.m. (3kHz deviation)	
Freq. (MHz)	Input (μV)	Freq. (MHz)	Input (μV)	Freq. (MHz)	Input (μV)
0.5	0.25	1.0	0.72	29.5	0.2
1.9	0.22	2.5	0.59	for 12dB SINAD	
3.6	0.23	4.0	0.59		
7.1	0.23	5.0	0.59		
10.1	0.22	6.1	0.59		
14.1	0.26	7.1	0.54		
18.1	0.26	9.5	0.77		
21.1	0.26	12.0	0.54		
24.1	0.26	13.7	0.60		
28.1	0.28	15.1	0.65		
		17.7	0.67		
		21.5	0.67		
		26.0	0.82		

**S-Meter calibration:** (At 14.2MHz u.s.b.)

Reading	Input required	
	dBm	μV
S1	—	55
S2	-107	
S3	-102	
S4	-99	
S5	-95	
S6	-89	
S7	-83	
S8	-77	
S9	-72	
S9+10	-62	
S9+30	-40	
S9+50	-18	

**Audio output:** 1.25W into 4Ω with 1.8% t.h.d.

**Record output:** 35–40mV

**AGC threshold:** 3μV (s.s.b./c.w.)

**Dynamic range:**

Signal separation from carrier (kHz)	Dynamic range (dB)
20/40	82
50/100	92

**Frequency stability:** Drift +55Hz in first 15 minutes; +25Hz in next hour at 14.2MHz

**I.F. Rejection:** >78dB

**Image rejection:** >89dB

**Attenuator:** 19dB at 14.2MHz

Selectivity:	Filter (kHz)	Bandwidth (kHz)	
		-6dB	-60dB
	2.5	2.8	3.7
	4	6.0	9.5
	7	8.2	12.2
	10	11.4	36.6
	400Hz (c.w.)	400Hz	—


**Test equipment used:**

Marconi Instruments 2017 and 2019 signal generators, TF2163S attenuator, 2435 frequency meter, TF2304 modulation/SINAD meter, TF893A power meter. Hatfield Instruments 3159 signal combiner.

GROUND terminal or the negative power supply rail. If this connection is omitted, the audio output suffers from a very strong "buzz" on all frequencies up to about 3MHz. It is understood that Lowe Electronics are modifying the design of the supplied mains adaptor to include an earth connection back to the third pin of the mains plug. In some situations, where the mains earth connection is noisy, it may be better to disconnect this third lead from the plug (taping it safely out of the way) and run a separate connection to a quieter earth point such as a buried rod or plate, if available.

The excellent User Manual comprises 24 pages in all, covering antenna and earth arrangements, power supplies, audio outputs, characteristics of the various signal modulation modes, controls and connections, operation, care of the receiver, optional units, a brief circuit description with block and circuit diagrams, and finally h.f. band plans for the amateur and broadcast bands. For anyone wanting more details of the HF-125, copies of the User Manual are available from Lowe Electronics, price £2.50, refundable against the purchase of a receiver.

A 41-page Technical Manual is also produced for the HF-125. This includes a full technical description of the receiver, semiconductor data, test and alignment procedures, parts list, p.c.b. layouts and circuit diagrams.

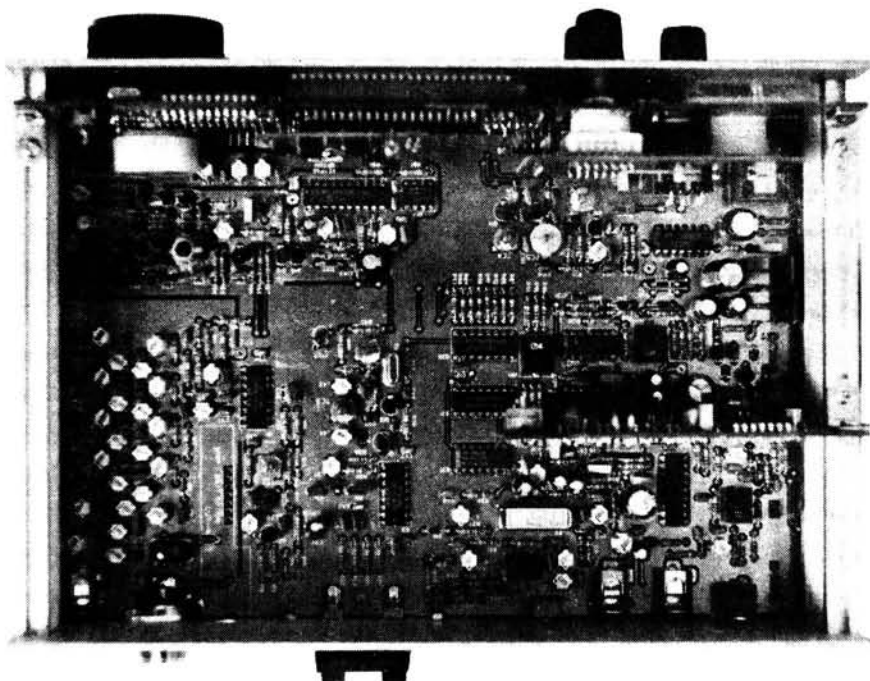

## Prices

The HF-125 in its basic form, including the full complement of i.f. filters and an a.c. mains adaptor, is priced at £375.00. The Keypad Option K-125 (keypad and interface) is £59.50 including fitting. The Detector Option D-125 (f.m. and synchronous a.m.) is

also £59.50. The Portable Option P-125 (NiCad pack, charger and active whip antenna) is £69.50.

Our thanks go to Lowe Electronics Ltd., Chesterfield Road, Matlock, Derbyshire DE4 5LE, telephone 0629 2817 for the loan of the review receiver. **PW**

# PRODUCTS

EXTRA

## Computer Control for the Yaesu FRG-9600

We have just received news of a new product that brings computerised scanning within the reach of everyone. Called the Yaesu Controller, it consists of an eprom and a cable and it allows you to control all of the functions of the FRG-9600 from a BBC computer without using any sort of interface. The chip is inserted into one of the ROM sockets inside the BBC and the cable is plugged into the Analogue to Digital converter on the back of the computer and into the CAT socket on the scanner. Then, by simply typing \*YAESU on the keyboard, the computer takes complete control and gives you all of the extra facilities that are usually only available when an expensive interface is used. We have not had time to fully evaluate this product but here are just some of the features that we think are noteworthy; 9 Pri-

ority channels, 255 active memory channels, memory storage on disc, step sizes infinitely variable between 0.1kHz and 99999kHz, on-screen S-meter, labelling of memories, Search and Store, direct access to spot frequencies by label or from the keyboard, new Osword calls, an attractive screen display with useful prompts and well thought-out menus.

The Yaesu Controller will also work with the FT-757GX and we believe that it will be compatible with the FT-767 and the FRG-8800.

We hope to be able to bring you a full review in the near future but until then, further details of this interesting new product, which retails at £40 plus £1 p+p, are available from Alan Hooker of **Alan Hooker Electronics, 42 Nether Hall Road, Doncaster DN1 2PZ. (Tel: 0302 25690).**

## OBITUARY

### Eric Dowdeswell G4AR

Established readers of *Practical Wireless* will be saddened to hear of the death on February 2 of Eric Dowdeswell, who had been associated with *PW* for many years.

Eric, who confessed to being of "1918 vintage", was introduced to the mysteries of radio at an early age by his father, and had become a licensed radio amateur by 1939. This, plus his work on mechanical TV projection systems, led him into war service in army wireless workshops around the Middle East.

In Istanbul, he met and married a Greek girl, Christine, bringing her home when demob came in 1946. After working for a while on wideband amplifiers and oscilloscopes with Nagard, Eric became a Flight Radio Officer, and spent 14 years with Sudan Airways, based in Khartoum. There, as ST2AR, he gained over 200 certificates of achievement in working 273 countries on c.w. or s.s.b.

Returning to the UK in 1967, Eric became General Manager of the RSGB for a while, then joined the Editorial staff of *Practical Wireless*. When the magazine's offices were relocated to Poole in 1977, domestic reasons forced him to stay in London, and he became Technical Editor of *Electrical and Radio Trader*, an IPC Business Press publication, where he remained until his retirement in 1983. Eric's association with *PW* did not end when it left London, however, and he continued to write the *Amateur Bands* column each month, only giving up that task last autumn.

I shall remember Eric with great affection, for the kind way in which he initiated me into the mysteries of journalism when I joined *Practical Wireless* from industry in 1973, and for his meticulous attention to detail at all times. His former colleagues on the magazine join me in offering condolences to all his family. **G3GSR**



# ON THE AIR

## AMATEUR BANDS

Reports to John Fell G0API, 14 Rectory Avenue, Corfe Mullen, Wimborne, Dorset BH21 3EZ



by John Fell G0API

As I commence this month's report the much "media hyped" big freeze has given way to a period of relatively warm stable high pressure, which whilst producing plenty of thick fog has also resulted in some useful v.h.f./u.h.f. propagation affects.

For the v.h.f. and above minded amateur such "anomalous" propagation is vital to sustain contacts at distances in excess of "line of sight" limitations, created by the natural obstacle of the earth's curvature and resulting "bulge" block. A short review of the available propagation modes seems appropriate at this point so let's first consider unobstructed line-of-sight paths.

Radio waves, like light, travel in relatively straight lines so if the transmitting and receiving antenna heights are known the available workable distance can be calculated. The distance from each end of the link to the horizon is obtained from the formula:

$$D \text{ (km)} = \sqrt{12.75H}$$

where H is the antenna height in metres. Because of changes in air pressure, temperature and humidity along the path, the refractive index of the atmosphere can be modified leading to bending or refraction of the signal, allowing an extension to the true line of sight path. On average a figure for this extension amounts to a path length increase of 33 per cent or a modified refractive index figure of 1.33. The "practical" rule of thumb formula now becomes:

$$D \text{ (km)} = \sqrt{17H}$$

If you do the sums it will be clear that many contacts made exceed this figure by a very large amount and point to the existence of other extended range mechanisms. Signal strength decreases with distance and the loss or attenuation over a given path follows the so called "inverse square law"—each time you double the path length you attenuate the received signal by 6dB or four times. Path loss also varies with frequency—an unobstructed path of 16km would result in a signal attenuation of 90dB at 50MHz, 109dB at 432MHz or 137dB at 10GHz.

Tropospheric related signal enhancement can take place between high power/large antenna systems utilising *tropospheric scatter*, involving both stations focusing their signals onto a specific area in the troposphere, between 300–15 000m above sea level. Path losses are much greater than simple line-of-sight but by elevating high gain directional antennas and maintaining a low angle of radiation signals can be scattered from a common mid-path point by reflections off dust particles, clouds and refractive index variations that occur at these heights. The main drawback is the high effective radiated power requirements—e.m.e. stations or near equivalents.

*Tropospheric bending* is a mechanism that relates to weather conditions and

allows much enhanced DX contacts, this time with even QRP stations.

Normally air temperature decreases with increasing height but during abnormal conditions an abrupt increase in temperature at a particular height can occur causing a very large increase in refractive index. Slowly declining high pressure systems are ideal times to watch for this situation—if you have a really good elevated location this phenomena can also block the DX at such times if you happen to be above the active layer height!

*Tropo ducting* is a related form of propagation and together with *super refraction* occurs most frequently over sea paths. In this case two distinct temperature changes are present at different heights producing a duct effect which behaves in the same ultra low-loss manner as a waveguide. The duct height (distance between temperature change boundaries) determines the lowest frequency that may be propagated and frequently allows contacts over several thousand km well into the middle microwave regions. Super refractive ducting over the Mediterranean has pushed the world 10GHz DX record well beyond the 1000km mark with equipment that is now modest in e.r.p. terms for amateur stations.

Other "natural" scatter modes include those caused by lightning and rain, the former can produce enhancement over 800km paths, due to localised ionisation near the strike, but please ensure your station is well away from this point. I would always recommend *total* disconnection of *all* station antenna feeds when there is the remotest possibility of lightning activity in the area. Rain scatter is usable with large cumulo-nimbus formations and allow extended contacts at 10GHz, where individual rain drops resemble significant portions of the wavelength in use. The recovered signals sound similar to the randomly scattered auroral signals at lower frequencies—weak and watery!

I have talked about F2, Sporadic-E, Transequatorial, meteor and auroral propagation effects in previous issues which really only leaves the more esoteric propo-

gation enhancing agents such as man-made satellites, aircraft reflections and artificial auroras, with the principle exception of e.m.e. (earth moon earth). This is traditionally a technique that can only be utilised by above average equipped stations and to be fully exploited demands high power and highly directional/high gain antenna systems. Over the last 25 years several amateur stations worldwide have held contacts by back scattering radio signals from the Moon's surface. As this natural satellite is on average some 33 000km distance, with a surface resembling dusty concrete you can well imagine the requirements for extremely sensitive/low-noise receivers coupled to very narrow beamwidth antenna systems.

Multiple bays of Yagi antennas are common on 144 and 432MHz, with parabolic dishes dominating at 1.3GHz and above. Signals are randomly rotated in polarisation by the interactions with the earth's atmosphere, reducing the returned signals by anything up to the full cross-polarised amount of 30dB (1000 times)—not helpful when the signal is only a few dB above the background noise produced by the remnants of the "big bang" and other celestial r.f. noise sources.

Circular polarisation with ready control of sense (right or left hand) is now common on 1.3GHz and above, virtually illuminating the effects of polarisation shift. A 4m parabolic dish on 1.3GHz will have a gain of some 30dB over a dipole and can be readily built, fitted to a rotatable and elevatable mount and in conjunction with a reasonable GaAs-f.e.t. pre-amplifier will allow "backyard" e.m.e. receive capability.

A pair of 2C39 coaxial triode valves in a suitable cavity layout will produce some 150W of r.f. and will allow two-way contacts. If you really want to work DX above 50MHz e.m.e. is the *only* natural phenomena that will produce a WAC award for your shack wall—Have fun. I hope to contact some of you later on this year via the Moon, at least on 1.3GHz.


## To the Band

Back to earth, but gently I hope, and several of you have taken the trouble to put pen to paper once again, plus some newcomers!

No top band offerings this month but judging by the reaction to a homebrew 1.8MHz project at my local amateur radio society there is certainly plenty of activity present and pending—a.m. is alive and kicking in 1987!

**Bill Stevenson G4KKI**, Swinton, Manchester sent in details of his "all homebrew" QRP 3.5MHz station which is based on the DSB80, Z match a.t.u. + accessories and loaded dipole antenna. Being ex-Royal Signals it's not surprising that the main activity involved c.w. contacts at the 2W level with amongst others GB2ALC, G6PJ, G3US, G3FBN, G4VDJ, GM30XX/A, GM3MXN and G0AHW. Bill even makes his own QSL cards!

**Angie Sitton BRS 88639** (but not for long) Stevenage has produced another detailed log, the result of countless hours of careful listening, an activity we could all

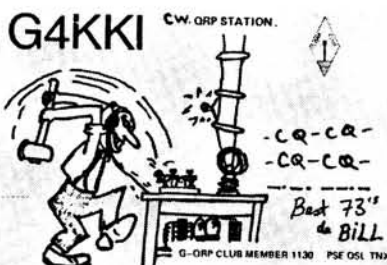

All equipment used at the QTH of Bill Stevenson G4KKI (RSARS 1596), including his QSL card, is homebrew



profit from. First of all the really good news that the RAE results came eventually and hopefully by the time you are reading this several of you may well have worked Angie as a brand new GO—well done indeed! Logged on January 5 was K2MGR on c.w. at 2358. Newcomer s.w.l. **Leighton Smart**, Trelew is sent in details of loggings across the h.f. bands which include several 3-5MHz band contacts. Using a 25m long wire or his inverted V feeding a Grundig 1400SL RX, Leighton noted K1DQV/KP4 in QSO with LA60J at 2317 on Jan 9 together with NU4Q, W10QQ, K9CAN and W1GNE—all s.s.b. The 11th produced N1CKU in QSO with G14VKS with VE3RP working into DL on the 12th. To round things off VO1HN was heard working into G/El on the 14th. Leighton is currently in the process of setting up a local s.w.l. club and has decided upon SWL 259 as his personal identification. If you live in the Trelew area why not make contact, the address is 33 Nantgwyn CF46 6DB.

The 7MHz produced a fair crop of DX for Angie Sitton with VK2LA, LU2DIO and HI1KHA (Dominican Republic) heard during late December on c.w. January 1 found HV3SJ, Vatican City, on s.s.b. (QSL via I0DUD) and K4FU on c.w. January 3 featured 8P6RE (Barbados), J87CD (St. Vincent QSL via Sue GWOANT) and YX5D (Venezuela QSL Tony, Box 2289, Caracas). A final South American was HK3JZD, Columbia at 0042 on the 18th. Leighton Smart heard S79LJ at 2239 on the 10th,

4N7ZZ(?) at 2206 on the 12th, with JA5AQC deep in the noise, and UP2BAY at 2121 on the 13th. Leighton asks if s.s.b. is permitted on 10MHz and whilst he has logged stations using this mode, the band is designated for narrow band modes i.e. c.w. Stepping up to 14MHz, we once again find the bulk of the activity with 13 stations listed by Angie Sitton including HF6ABH and close neighbour VP8LP on January 1. ZS1RR, 5U7IL, 5A6XF and 7X2LS showed up on the 4th. Israeli special call 4Z7T was logged on the 11th with ZF6AD and Seychelles Islanders S79SHW and S79V on the 11th and 13th. Bill Stevenson had a solitary contact on 14MHz with YL of OH6LC. Leighton Smart also listened on 14MHz, with N7 CSJ/MM (Indian Ocean) observed at 1436 on 13 January. AA4AH, logged at 1236 on 15 January, provided a new US prefix and Leighton wonders if this was a special event station?

21MHz opened up for Angie Sitton with Brazilian special call ZX2U on 4 January, 9J2BO Zambia on the 11th together with ZS1JW. The 18th produced a very weak VU2SMN at 1124, SC0IH (QTH Rhodes) at 1246 and YCOMCA with YB0ZA at 1124 and 1133 respectively.

28MHz saw some decline from the levels of October/November but none the less produced some interesting traffic. Angie heard SV1VR at 1133 on 1 January. Phil Dykes G4XYX, Poole, completed several QSOs at the 10W p.e.p. (max) level in conjunction with his 2-element

cubical quad. Amongst the total DJ1ZU was worked on 19 November EA2PZ on 25 November, HG4XX plus IU0UWS (Sardinia Special call) on 14 December.

SM5DYC exchanged on 27 December, UA6ADC on 4th, WD8IXE/J6L (St. Lucia) on 2nd and YU3HR on the 14th.

50MHz continues to provide activity and it is hoped that the DTI will soon clarify the further development of the band in the UK and allow general access to all licence categories. The UK 6m group has been actively promoting the band and has been instrumental in providing equipment for amateur activity in Malta. It is hoped to install a beacon and have stations active from the island during the coming months. Finland is also thought to be considering licencing amateur operations on 50MHz

#### From Now On . . .

This is the last "Amateur Bands" written by John Fell. We would like to thank him for his past efforts, and to thank all those who sent reports to him.

Future h.f. band reports should be sent to **Paul Essery G3KFE, c/o Practical Wireless, Enefco House, The Quay, Poole, Dorset BH15 1PP**, for inclusion in "On the HF Bands".

Reports of activity at v.h.f. and above should be sent to **Norman Fitch G3FPK, 40 Eskdale Gardens, Purley, Surrey CR2 1EZ**.

All reports should reach their destinations by March 27.

# RTTY

Reports: as for VHF Bands, but please keep separate.

Thanks to the help from members of the Gilwell Park Scout Amateur Radio Group, **Steve Beazley**, Chingford, has been able to add RTTY to his s.w.l. station. Steve has been active for about 9 years and currently uses a Trio R300, with a Datong converter for 144MHz, with a full size G5RV antenna for the h.f. bands, a long wire for 3-5MHz and a Slim Jim for the v.h.f. band. "During the past two months, I have logged over 70 RTTY stations on 144MHz, including F6 and PE1 on November 29," wrote Steve on January 18. He uses a Commodore 64 computer and Scarab software for RTTY and the 4 countries he copied on 3-5MHz and the 17 on 14MHz, between January 15 and 18 have been included, along with Len Fennelows and mine, in the list of RTTY prefixes logged throughout this period, Fig. 1.

The majority of amateur stations do send QSL cards to confirm contacts or in reply to a meaningful reception report and these cards are normally accepted as proof for the number of achievement certificates, which are offered by various organisations. RTTY enthusiasts wishing to know more about the availability of national and international awards, can look forward to the publication of a new book entitled, **RTTY AWARDS**, written by Ted Double G8CDW, the Awards Manager of the British Amateur Radio Teleprinter Group. Ted has listed the qualifications required to earn a certificate from radio societies in Belgium, France, Germany, Holland, Japan, Scandinavia, UK, USA and the USSR and has included the address of the organiser to contact. Enquiries about the price and delivery of this book should go to Peter Adams G6LZB, 464 Whippen-dell Rd., Watford, Herts WD1 7PT.

"There is always something interesting to be found on 14MHz," wrote **Len Fennelows G4ODH**, Wisbech. He logged RTTY signals from 47 countries, ranging over all continents on 14MHz during the month prior to January 18, and that included a



by Ron Ham BR515744

new one 9X5 Rwanda. He also copied RTTY from 7 countries on 3-5MHz, 11 on 7MHz and 3 on 21MHz. Activity on 21MHz has been sparse to say the least. "The African QSO was interesting, it was in German between and emigrant Swiss and a fellow national in Berne," said Len.

Although I received RTTY from 25 countries, around 14-090MHz, during this period, the majority were European. The exceptions were Sri-Lanka copied at 1532 on January 17 and Guatemala, a new one for me on 21MHz at 1636 on the 25th. I was lucky to read this one because of QSB, however, I left my R2000 receiver

Fig. 1: The RTTY chart

Country (Prefix)	Frequency (MHz)				
	3-5	7	14	21	28
Australia (VK)			X		
Austria (OE)	X		X		
Balearic Is (EA6)			X		
Belgium (ON)	X				
Brazil (PY)			X		
Bulgaria (LZ)			X		
Canada (VE)			X		
Canary Is (EA8)			X		
Ceuta & Melilla (EA9)			X		
Cuba (C02)			X		
Czechoslovakia (OK)		X	X		
Denmark (OZ)	X	X	X		
East Germany (Y2)	X	X	X		
England (G)	X	X	X		
Finland (OH)		X	X		
France (FE)	X	X	X		
Gozo & Comino (9H4)			X		
Greece (SV)			X	X	
Guatemala (TG)			X	X	
Guernsey (GU)		X			
Holland (PA)	X	X			
Hungary (HA)			X		
India (VU)			X		
Indonesia (YB)			X		
Israel (4X)			X		
Italy (I, IK, IT)	X	X	X		
Kenya (5Z)		X			
Lebanon (OD)		X			

Country (Prefix)	Frequency (MHz)				
	3-5	7	14	21	28
Luxembourg (LX)			X		
Moldavia (U0)			X		
Morocco (CN8)			X		
Nigeria (5N)				X	
Northern Ireland (GI)			X		
Norway (LA)	X	X	X		
Oman (A4X)			X		
Poland (SP)	X	X	X		
Portugal (CT)			X		
Rhodes (SV5)			X		
Rumania (Y0)			X		
Rwanda (9X5)			X		
San Marino (T7)			X		
Sardinia (IS)			X		
Scotland (GM)	X		X		
Sicily (IT9)		X	X		
South Africa (ZS)			X		
Spain (EA)		X	X		
Sri Lanka (4S)			X		
Sweden (SM)	X	X	X	X	
Switzerland (HB)			X		
Ukraine (UT)			X		
USA (W)			X	X	
USSR (UA, UB)			X		
Wales (GW)			X		
West Germany (DF, DJ, DL)	X	X	X		
Yugoslavia (YU)			X		

Country (Prefix)	Frequency (MHz)			
	3-5	7	14	21
Australia (VK)			X	
Austria (OE)			X	
Bulgaria (LZ)			X	
Canada (VE)			X	
England (G)			X	
Finland (OH)			X	
France (FE)			X	X
Hungary (HA)			X	
Italy (I, IK, IT)		X	X	
New Zealand (ZL)			X	
Norway (LA)			X	
Poland (SP)			X	
Portugal (CT)			X	
Scotland (GM)		X	X	
Sicily (IT9)			X	
Spain (EA)			X	
Sudan (ST)			X	
Sweden (SM)	X			
Switzerland (HB)		X	X	
Tanzania (5H3)				X
USA (W)			X	
West Germany (DF, DJ, DL)	X	X	X	

tuned to his frequency and when he returned to a Brazilian station his country and callsign, TV9VT, came during the upward peak of the fading.

At 0837 on December 30, I logged strong signals from SK6SA sending "MAILBOX LITHEBURG AMATEUR RADIO GROUP". Some text that amused me early on January 14 was, "THAT IS MY 'WEAPONS' HI HI," said an OH9 to an LX after describing his equipment.

"AMTOR traffic has been rather more frequent this time," said Len, whose consistency and patience rewarded him with the 22 prefixes listed in Fig. 2.

Fig. 2: The AMTOR chart

**BRITISH  
AMATEUR  
RADIO  
TELEPRINTER  
GROUP**



**Details of subscriptions from  
John Beedie, Ffynnonlas,  
Salem, Llandeilo SA19 7NP**

**This column is remaining unchanged,  
so keep your reports coming to Ron—  
by March 27 this month.**

## SPACE & SATELLITE

Reports to: Pat Gowen G3IOR, 17 Heath Crescent, Hellesdon, Norwich, Norfolk NR6 6XD.



by Pat Gowen G3IOR

### OSCAR-10

Despite all of the problems of failure to accept commands into the now almost completely depleted IHU memory, AM-SAT-OSCAR-10 seems to have failed into the ideal mode. The transponder is now fixed in the high-power mode of Mode "B" (435MHz up, 145MHz down) and excellent two-way QSOs are being effected.

The beacon is on low power, but with a plain unmodulated carrier only, this giving no indication of the battery state, temperature, attitude, spin rate, or any other parameter. The spare battery pack is locked in, and should last for a considerable time. Unless the power supply is badly depleted, and a switch mode effected (there being no way to revert) by a high power station using the transponder during an eclipse period, there is no reason to believe other than that the satellite may continue to give good two way communication for a considerable period. To quote **Peter Guzelow DB2OS** "The last command I sent was the RESET command, so the IHU is stopped. The output ports are reset, which turns the transponder and beacon on. There is no danger that further memory errors will change this status. In other words, the IHU is out of operation... the transponders will be on for ever... if the battery holds".

As no means is left to turn the satellite to effect optimum earth pointing of the antennas, there will naturally be periods when severe spin modulation will disrupt the QSO quality. Already in late January it would appear from observational behaviour that precession (a "wobble") is beginning to occur, and this will additionally mean a gradual slowing of the spin rate.

The impossibility of commanding the magno-torquers to re-orientate the satellite to steer the solar panels to face the sun will additionally mean that there will be times when even if out of eclipse the satellite should not be used. At the time of writing, all users are urgently requested not to run more than 100W e.r.p. and not to use the transponder at all when the satellite is in shadow. All these periods will be advised on the AMSAT nets and by AMSAT observers via the satellite itself to

update the bad sun angles and mean anomaly periods at which the eclipses begin and end.

Already the command team consisting of ZL1AOX, VK5AGR and DB2OS have calculated when these periods might be, and the following schedule is implored to maintain the life of the satellite.

#### PERIOD MA for use Reason

1987 from/to

Jan/Feb 20-220 Avoids eclipses  
Mar/Apr DO NOT USE Low to zero solar illumination

May/Jun 30-220 Avoids eclipses  
Jul/Aug 40-220 Avoids eclipses  
Sep/Oct DO NOT USE Low to zero solar illumination

Nov/Dec Await further information nearer to the date.

**Jim Miller G3RUH**, has kindly sent us in a fully detailed forecast which is produced as Fig. 1.

On the user side, an interesting report is sent to us by **Paul Thompson G6MEN**, of the Civil Service Amateur Radio Society. To celebrate the 25th anniversary of the launch of OSCAR-1, GB1CSR was activated on OSCAR-10 and the RS satellites, and worked over 200 stations. On RS-5 and 7 prefixes included EA1, EA6, YU, LA, DL, SM, ON, OZ, CT, F, PA, UA3, UA4, UB5, UA9, HB9, W1, and VE1. Using OSCAR-10 they worked I, OZ, ON, OE, DL, LU, W3, W9, ZS6, PT2, VK6, and the best of all V85GA in Brunei. Fuji-OSCAR-12 was monitored, but the system was not felt to give a good enough downlink to attempt QSOs as, in particular, an ear-splitting local thermostat was giving regular 2 minute bursts of S9 noise across the entire radio spectrum!

### "RS" Satellites

RS-1 is still being heard sending "55" and "5015" on 29.402MHz whilst in sunlight. The transponders are on from time to time on RS-5 and 7 to permit loading and battery charge status, but no official schedule for use is given this

eclipse period. A new period of six weeks of full time operation will commence in the third week of March. At the time of writing, RS-9 and 10 are still awaited, the latest word from UA3CR indicating a further slight non-technical delay.

### Fuji

FO-12 maintained its provisional schedule for about one week, and then reverted to a week's full time Mode "JA". It is understood that the new satellite has still to be officially handed over to the user community, and that experiments are still proceeding to load the digital software and to evaluate the charge/discharge cycle optimum ratio.

### UoSATs

To provide the optimum coverage of space news and up-to-date Keplerian elements, Uo-9 will transmit a Keplerian data bulletin each alternate Friday through Sunday, whilst Uo-11 will provide a news bulletin each week. To experiment with the possibilities of magno-torquing and gravity gradient, Uo-11 will be de-spun and commanded to invert, that is to go "upside down". This will undoubtedly upset the signal, and may produce QSB. The TLM and WOD will indicate the satellite position. Normally, although the deviation is far greater, Uo-11 is some 3dB weaker than its older brother, as it is higher and hence the path loss is greater.

### MIR

In addition to our news in "What goes up" we have word that a large scientific Astrophysics Laboratory package is being prepared to send up to MIR, to dock onto one of the ports in the same manner as the COSMOS satellite was united with SAL-YUT-7. Whether we shall have a new powerful h.f. beacon is yet to be known.

### Views of ARSENE

In the February issue, we gave some details of the progress of the "ARSENE" AMSAT-F satellite and its control station, now being developed by CNES for a future *Ariane* launch. Thanks to **Bernard Decaunes HB9AYX**, we now have been sent some photographs that he took re-



1987 Date Monthday	Arg Peri Ref	Sun's Position RA DEC	Spacecraft Altitude Alt. Alt. Alt.	Best Alt. Alt. Alt.	Solar Illum. Illum. Illum.	Eclipse Data RA DEC Dur	Recommended Use Ref-Ref		
1987 Jan 5	174	72	2	154	15	75	7 99	220 240 54	Jan/Feb ----- 20 - 220
1987 Jan 12	174	78	4	154	14	73	15 97	224 242 50	
1987 Jan 19	178	84	6	153	14	72	22 93	227 244 45	
1987 Jan 26	180	90	8	152	13	70	29 88	231 246 42	
1987 Feb 2	181	96	10	151	13	69	36 81	235 247 39	
1987 Feb 9	183	102	11	150	12	68	43 73	236 249 36	Mar/Apr ----- N O T U S E
1987 Feb 16	185	109	12	150	12	66	50 64	238 250 34	
1987 Feb 23	187	115	13	149	12	65	57 54	240 251 32	
1987 Mar 2	189	121	13	148	11	64	64 44	241 252 31	
1987 Mar 9	191	128	14	147	11	63	71 33	243 253 30	
1987 Mar 16	193	134	15	146	10	61	78 21	244 254 29	May/Jun ----- 30 - 220
1987 Mar 23	195	140	15	145	10	60	84 10	245 255 29	
1987 Mar 30	196	147	12	144	9	59	86 7	246 0 28	
1987 Apr 6	198	153	11	144	9	58	80 17	247 1 28	
1987 Apr 13	200	159	10	143	8	57	74 28	248 2 28	
1987 Apr 20	202	165	9	142	8	56	67 39	249 3 28	Jul/Aug ----- 40 - 220
1987 Apr 27	204	171	8	141	7	54	60 50	250 4 28	
1987 May 4	206	177	6	140	7	53	54 59	250 5 28	
1987 May 11	208	183	5	139	6	52	47 68	251 5 28	
1987 May 18	210	189	3	138	6	51	40 77	252 6 28	
1987 May 25	211	194	2	138	5	50	33 84	253 7 28	Sep/Oct ----- D O N O T U S E
1987 Jun 1	213	200	1	137	5	49	27 89	253 8 29	
1987 Jun 8	215	206	-1	136	4	48	20 94	254 9 29	
1987 Jun 15	217	212	-2	135	4	47	13 97	255 10 30	
1987 Jun 22	219	217	-3	134	3	46	7 99	0 11 30	
1987 Jun 29	221	223	-4	133	3	45	0 100	1 12 31	Nov/Dec ----- Further notice.
1987 Jul 6	223	229	-4	132	2	44	-7 99	2 13 32	
1987 Jul 13	225	235	-5	131	2	44	-13 97	2 15 33	
1987 Jul 20	227	241	-5	131	1	43	-20 94	2 16 34	
1987 Jul 27	228	247	-5	130	1	42	-27 89	2 18 36	
1987 Aug 3	230	252	-5	129	0	41	-33 85	6 19 37	Further notice.
1987 Aug 10	232	258	-5	128	0	40	-40 76	7 21 39	
1987 Aug 17	234	264	-4	127	-1	39	-47 68	8 23 42	
1987 Aug 24	236	270	-4	126	-1	39	-54 59	10 26 44	
1987 Aug 31	238	276	-3	125	-2	38	-60 50	12 29 47	
1987 Sep 7	240	282	-2	124	-2	37	-67 39	14 32 51	Further notice.
1987 Sep 14	242	288	-1	124	-3	36	-74 28	16 36 54	
1987 Sep 21	243	294	0	123	-3	36	-80 17	19 40 59	
1987 Sep 28	245	300	1	122	-4	35	-86 7	22 45 63	
1987 Oct 5	247	306	2	121	-4	34	-94 10	26 51 68	
1987 Oct 12	249	312	2	120	-5	34	-98 21	30 57 73	Further notice.
1987 Oct 19	251	318	3	119	-5	33	-104 32	34 64 77	
1987 Oct 26	253	324	4	118	-6	32	-108 43	38 72 81	
1987 Nov 2	255	330	4	118	-6	32	-108 54	42 85 84	
1987 Nov 9	257	336	5	117	-7	31	-114 61	46 93 88	
1987 Nov 16	258	342	5	116	-7	31	-120 73	50 106 88	Further notice.
1987 Nov 23	260	349	5	115	-8	30	-126 80	54 119 90	
1987 Nov 30	262	355	5	114	-8	30	-132 87	58 132 90	
1987 Dec 7	264	1	4	113	-9	29	-138 93	62 145 96	
1987 Dec 14	266	8	4	112	-9	29	-144 99	66 158 99	
1987 Dec 21	268	14	2	112	-10	28	-150 99	70 171 101	Further notice.
1987 Dec 28	270	20	2	111	-10	28	-156 100	74 184 99	

Fig. 1

cently on a visit to F8FV in Toulouse, which show the achievements to date.

A section of the control room at Toulouse "Sup Aero" Technical High School, with the terminal computer used as a simulator for the command coding and decoding between the ground control (called 'Stella') and the ARSENE satellite is shown in Fig. 2. The upright panel is a seven segment I.e.d. indicator for visual indication warning of channels, such as the U batteries, the Solar Panel current, the spin rate, etc. and with status points for the repeater, temperature, motor, battery, and the p.a.s. on 145MHz and 2.4GHz.

The pair of Intel consoles (microprocessors), the drawing desk, and the console of the forthcoming "Stella" ground control, which will house an Icom transceiver, and already contains a functional az-el antenna command control system is shown in Fig. 3.

A partial view of the ARSENE construction room, also at the Technical High School "Sup Aero" in Toulouse, with a central wrapped prototype section under investigation is shown in Fig. 4.

The photographs in Figs. 5, 6, and 7 are self obvious, as they have captions that are easily understandable in French or English.

A model of the ARSENE satellite itself, in the solar panels deployed configuration, but with prototype antennas is shown in Fig. 8.

The present project status has:

The pyrotechnical deployment of the solar cells functioning.

The specialist pneumatic attitude building control underway

The Apogee kick motor (called "MARS") already received from "SEP" (the Societe Europeenne de Propulsion)

Numerous modules in the final stages, and even the p.c.b.s tested, with only the components to be mounted and soldered to the space-quality standard required.

## Moonbounce in 1987

Moonbounce is normally a very "hit and miss" form of communications for the radio amateur, as the limitations of power and antennas imposed by the depth of



Fig. 2

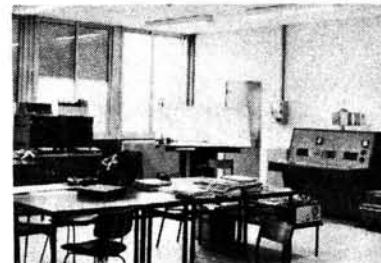


Fig. 3

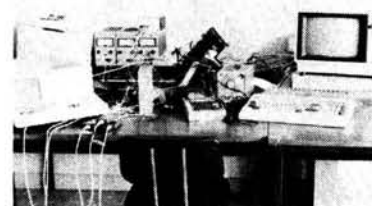


Fig. 4

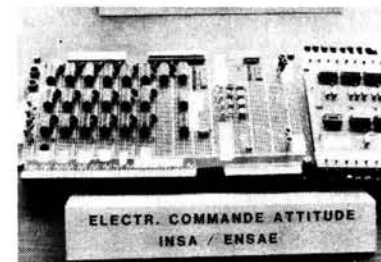


Fig. 5



Fig. 6

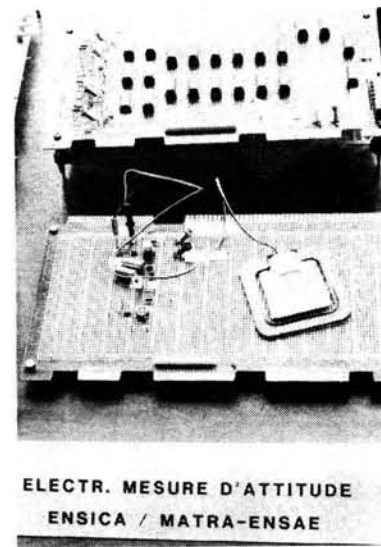


Fig. 7

one's pocket and the area of real estate available for large antennas mean that most QSO are very marginal at the best of times. EME stations speak of "good" and "bad" conditions, in the same manner that h.f. operators refer to the variables caused by the ionosphere, or v.h.f. terrestrial users speak of tropospheric changes affecting their activities.

At first sight, the e.m.e. path would not appear to change very much, apart from the 2dB enhancement of the returned signal created when the moon is at perigee, brought about by the inverse square law advantage when the moon is closer to earth. All e.m.e. operators know that this is not the only factor, as often the moon will be at optimum perigee, yet echoes are absent, and the reverse case, when the moon is at outmost apogee, yet good returns result.

Another factor affecting those with linear antennas is the Faraday rotation of the signal brought about by its dual passage through the ionosphere, when the received polarisation can be twisted through 90 degrees, giving severe attenuation unless the antenna can be matched to the incoming angle. This is invariably worse when the lunar angle is low, when the signal has to traverse a low angle of ionospheric incidence.

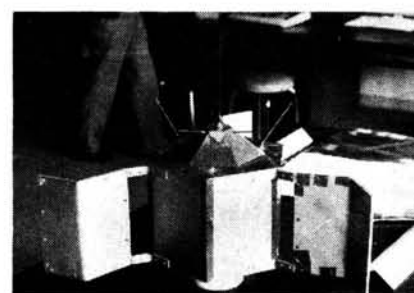


Fig. 8

An opportunity for investigating advantageous propagation will present itself this year, and has been pointed out to us by John Branegan GM4IHJ. John indicates that the orbit of the moon about earth is subject to cyclic variation every 18.6 years, and that 1987 features one of the cycle peaks. This cycle takes the moon 5 degrees above and below the mean line around earth every 27 days, as every 18.6 years there is a period when this 5 degree cycle adds to the 23.5 degree cycle of the earth around the sun, the arc that produces our winters and summers. When the two cycles add this year, the moon is said to have a very high declination at one part of its 27 day cycle and a very low declination



14 days later in the bottom half of this cycle.

This cycle peaks in September this year, and on 15/16 September 1987 the lunar declination will maximise at nearly 29 degrees, this meaning both high and more Northerly lunar positions, this giving short paths through the ionosphere, and hopefully excellent e.m.e. results. As a comparator, allowing for an improving perigee, fourteen days later the cycle gives maximum negative declination. The moon will now be very low in the south, seen through a very thick oblique incidence ionosphere and atmosphere, which should give very poor results. Our Fig. 9 comes from GM4IHJ's "ALMANAC" program for the Spectrum, and shows the lunar data for the relative period in September. The columns read date, the time of transit (maximum elevation), the actual angle of elevation, the rise time, the set time, and the angular diameter of the moon. These are from the G3IOR QTH, and need adjustment for more distant locations.

EME ALMANAC DATA					
Date	Time of Transit	Angle of Elevation	Rise Time	Set Time	Angular Diameter
15-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
16-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
17-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
18-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
19-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
20-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
21-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
22-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
23-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
24-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
25-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
26-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
27-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
28-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
29-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
30-09-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
01-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
02-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
03-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
04-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
05-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
06-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
07-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
08-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
09-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
10-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
11-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
12-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
13-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
14-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
15-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
16-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
17-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
18-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
19-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
20-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
21-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
22-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
23-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
24-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
25-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
26-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
27-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
28-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
29-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
30-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00
31-10-87	00:00:00	00:00:00	00:00:00	00:00:00	00:00:00

Fig. 9

## IARU moves

Region 2 of the International Amateur Radio Union has now backed Region 1 in recognising the damage being done to satellite communications by terrestrial users in the sub-bands allocated to space communications.

At their latest meeting, they considered that the majority of the interference is due to f.m. by the negligence or ignorance of the operators, as they are unaware of the presence of the weaker satellite uplink and downlink signals, and further might not have that mode to demodulate them. As the f.m. signals cover up to 10kHz, a major section of any satellite passband, they are asking member societies to remind the amateur radio operators in their country of the problems they are causing, and will take it upon themselves to inform more widely of those bands and frequencies which are allocated to satellites.

Despite similar measures taken in Hungary at the IARU Region 1 meeting, following papers given by G3IOR on behalf of AMSAT and RSGB at the April 1978 conference in Miskolc-Tapolca, the problem is unfortunately still extremely evident in Europe. Numerous mainland continental repeaters (thankfully not in the UK thanks to consideration and RSGB forethought) are still present in the 145-800-146-000 space sub-band with consequent problems to OSCAR-9 and 11 145-825MHz reception and decoding, and even more so to the relatively weak OSCAR-10 145-810MHz telemetry and higher transponder downlink band. Problems are presented in the form of wideband blocking in the FO-12 uplink passbands, evidenced as wide loud QRM on users' downlinks, and severely attenuating the entire passband to boot. Many nets, RAYNET groups and ordinary f.m. Simplex users also continue

to use space allocated frequencies in the upper 200kHz of the 144MHz band, many of whom have been advised of the problems they are causing, but persist despite pleas for abatement.

The ten metre 29-310-29-510 downlink section that is used by the "RS" series of satellites is frequently blocked by 29MHz band f.m. stations having converted 27MHz CB rigs to the amateur band on a channelised basis, possibly not even knowing their actual frequency other than the illuminated channel number. At times of good "E" layer propagation, severe difficulty is experienced in reading the satellite telemetry and the transponded signals due to the presence of high power omni-directional radiation from simplex stations over wide areas. It is very difficult to communicate the problems being experienced to the causers, as few of these users are able to read c.w., or even s.s.b., having only the mode for which this section of the band is NOT intended. Even the 435MHz Mode "B" uplink and Mode "L" downlink sections are not immune from simplex f.m. problems, although the presence of amateur wide-band TV seems fairly compatible.

If you suffer problems from persistent users, first gently remind them of their obligations, and carefully explain the issue. Remind them of the licence clause regarding causing interference to other licensed stations. If this fails, then report them to your National Society, and if this too fails, then remember that (with the exception of 1269MHz) our small sections may be used as both uplink and downlink bands, and one might well be transmitting on the band whilst listening on quite another band, i.e. to the satellite itself for the downlink return. The next obvious step is best not recommended!

## Keplerian Elements

Avid trackers will note that this month again we have given a listing of the latest Keplerian elements for all of the main satellites of interest. These elements, which originate from NASA have been sent in by Birger Lindholm, of Dalsbruck, Finland. This month we have included a set supplied by G3RUH for the sun, which whilst not exactly a satellite of earth as thought in ancient times, can still be followed in the same way. The sun, though a variable emitter is a valuable radio signal source for those who wish to check and improve their v.h.f. and u.h.f. receiver capability. By first pointing the antenna to the quiet sky, and then to ground, an increase of some 3dB will be seen on the good front-ended receiver, due to the ground temperature, regardless of antenna. Two dB is acceptable, but no noticeable difference will alert you to the need for receiver improvement. When we then point to the sun, it becomes antenna gain dependant, and the average good single Yagi will show some 2 to 4dB of sun noise above the quiet sky. If no increase is detectable, then your antenna and feeder needs some improvement, whilst if you can see better than 12dB when the sun is quiet, you have moonbounce capability with your array.

## Equator Crossings

A number of readers have expressed their need for reference orbits, i.e. actual ascending equator crossing times and the longitude of that crossing, with which to use their trackers. As space is limited in

our column, we do not normally have the room for both without cutting out a lot of important satellite information. It is, however, quite simple to find an equator crossing from the given Keplerian elements, by running them on a minute to minute time scale after midnight on a given day, and then noting the longitude in degrees west of the Greenwich meridian and the exact time at zero degrees latitude of the first ascending (South to North going) crossing of each satellite. Computers are now so cheap, and tracking programs using Keplerian data so readily available, that this method is strongly recommended for continued use.

Even so, all of this is purely academic for those who do NOT have a computer, as their need of equator crossings to use for "Oscarators" or tables (such as we have published in past columns) is even greater. In deference to many of our readers' communicated wishes, we have this month included two sets. Fig. 10 is for when you get your copy, and Fig. 11 two weeks later, to keep you going until you receive your next issue in early March. They give you the data for the first ascending (Northbound) equator crossing of the day for each of the main satellites of interest and are computed from the "Eqxer" program, another one new from GM4IHJ for the Spectrum computer. The first column gives the satellite name. F12 is Fuji Oscar-12, RS-5 is Radio-Sport-5, RS-7 Radio-Sport-7, "Mir" the latest USSR space station, "Sal" is the older SALLYUT-7 space station, RS1 the ageing but still operating first Radio-Sport satellite, UO1 is UoSAT-1 alias OSCAR-9, UO2 is UoSAT-2 alias OSCAR-11, whilst NO9 and N10 are NOAA-9 and NOAA-10 respectively. M13, M14 and M/1 are the METEOR 2/13, 2/14 and 3/1 satellites.

The second column gives the UTC (GMT) time of the first ascending equator crossing of the day selected, and the third column "Brg" the longitude in degrees West of Greenwich of the crossing. For following orbits, under "Next Orbit", column 4 gives the number of minutes that will elapse before the next equator crossing, which can be added to the given EQX time to give the next orbit of the day. Column 5 gives the number of degrees further west that the satellite will be on this next equator crossing, which can be added to the given bearing to give that following. (Subtract 360 if "Brg" + "inc" exceed 360 upon addition). A similar addition can be performed for the following day, where under "Next Day" if "+ min" is added to UTC EQX it will give the time of crossing the following day, and if "+ deg" is added to "Brg" the longitude of that next day crossing is supplied. If feedback shows these to be required on a regular basis, we will try to include monthly.

If a precise updated reference orbit is really essential, then merely come up on one of the many AMSAT nets and ask, and it will be readily supplied. If you need them quarterly, they will be sent with OSCAR News on request. Should you need them for a complete year, then "Project OSCAR" send an annual prediction book giving all crossings of FO-12, RS-5, RS-7, UO-9 and UO-11 for a \$10 donation in USA, or \$12 overseas, sent to the address given in this issue.

## What goes up . . .

On Friday, 16 January, as planned, the USSR launched Progress-26 to carry supplies and equipment to the MIR space-

Satellite	OSCAR-9	OSCAR-10	OSCAR-11
<b>Internat Design</b>	81-100B	83-58B	84-21B
<b>Object</b>	12888	14129	14781
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	319-19196703	312-44034196	315-59538399
<b>Inclination</b>	97-6545	26-9515	98-1309
<b>RAAN</b>	325-3871	51-0499	20-3554
<b>Eccentricity</b>	0-0000899	0-6033158	0-0014765
<b>Arg of Perigee</b>	294-1946	158-5947	62-5607
<b>Mean Anomaly</b>	65-9186	244-4550	297-7114
<b>Mean Motion</b>	15-28930712	2-05880591	14-62084842
<b>Decay Rate</b>	3-704e <sup>-5</sup>	-4-1e <sup>-7</sup>	1-85e <sup>-6</sup>
<b>Orbit Number</b>	28403	2560	14390
<b>Beacon Freq.</b>	21-002 145-825 435-025 2-401GHz	145-810 436-055	145-826 435-025 2-4015GHz

Satellite	RS1	RS5	RS7
<b>Internat Design</b>	78-100A	81-120C	81-120E
<b>Object</b>	11084	12999	13001
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	304-03950743	311-19322740	310-21414812
<b>Inclination</b>	82-5441	82-9662	82-9654
<b>RAAN</b>	310-5547	28-9451	22-5374
<b>Eccentricity</b>	0-0013314	0-0011597	0-0022806
<b>Arg of Perigee</b>	98-8395	117-5884	32-0531
<b>Mean Anomaly</b>	261-4160	242-6426	328-1935
<b>Mean Motion</b>	11-96696353	12-05063605	12-08700109
<b>Decay Rate</b>	9-0e <sup>-8</sup>	1-3e <sup>-07</sup>	1-3e <sup>-7</sup>
<b>Orbit Number</b>	35008	21509	21562
<b>Beacon Freq.</b>	29-401	29-330 29-452	29-340 29-501

Satellite	FO12	SALJUT 7	MIR
<b>Internat Design</b>	86-61B	82-033A	86-17A
<b>Object</b>	16909	13138	16609
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	315-42879698	316-86459818	316-92012796
<b>Inclination</b>	50-0124	51-6129	51-6126
<b>RAAN</b>	334-6864	216-5710	189-3350
<b>Eccentricity</b>	0-0011668	0-0001320	0-0024484
<b>Arg of Perigee</b>	91-7324	147-3568	84-2948
<b>Mean Anomaly</b>	268-4846	212-7591	276-0550
<b>Mean Motion</b>	12-44392645	15-30731678	15-77925873
<b>Decay Rate</b>	-2-5e <sup>-7</sup>	8-02e <sup>-6</sup>	1-1819e <sup>-4</sup>
<b>Orbit Number</b>	1127	26284	4197
<b>Beacon Freq.</b>	435-797 435-910	19-955 142-42	121-750 143-625

station. The vehicle successfully automatically docked on Sunday 18 January. A three man cosmonaut crew intended to follow in the new more powerful SOYUZ-TN-1 within the following week, but extremely bad weather at Tyuratam prevented the launch, which was to be expected during the window in late February. The crew will be going for a record breaking ten months stay in orbit, but, to our regret, no licensed radio amateurs are in the current crew. A Syrian cosmonaut will lift off to MIR in July, a French member soon, and two Bulgarian cosmonauts are now under training in Moscow for a MIR mission in 1988.

NASA have announced the five man crew for the next Shuttle mission, consisting of Fred Hauke (of Challenger 51-A), Richard Covey, John Lounge, George Nelson, and David Hilmers. Again, no current amateur licences figure in the team. The mission may be further delayed, as the composite replacement for the solid fuel booster sectioning neoprene seal rings that failed and resulted in the Challenger catastrophe have been found to be denatured by anti-oxidants in the rocket, this meaning a further period to find a suitable replacement for the section junctions.

Meanwhile, the trusty DELTA launch vehicles which successfully took the early OSCAR missions in orbit have been brought back with a new improved version called "MLV" (for Medium Launch Vehicle)

which will be used for many of the waiting USAAF and commercial payloads.

The NAFDA launch agency of Japan will be placing "MOS" the Marine Observation Satellite into orbit in mid-February with the eighth and last No.1 launcher, which has had a zero failure rate, having launched a test satellite, two weather satellites, two communications satellites (including JAS-1) and a pair of direct broadcasting satellites since February 1981. This summer Japan will use the H-1 rocket to put the ETF-4 test satellite into orbit, and much later JAS-1B. JAS-1B is identical to JAS-1A, which is now in orbit as our latest amateur-radio satellite FUJI-OSCAR-12. It was built concurrently with JAS-1, and should be up and aloft by the end of 1989.

ESA has been contracted to fly ITAL-SAT in 1990 on the ARIANE-4. Due to the long delay caused by the third stage ignition failure problem, a back-log of 41 satellites are now waiting for ARIANE launches. Meanwhile, the USSR has formed GLAVKOSMOS, a commercial launch agency available for scientific packages from the International community, who may be very amenable to the free launch of satellites for the scientifically and educationally inclined amateur builders.

### ... must come down ...

The "NUSAT-1" (Northern Utah SATellite) built by the students of Utah's Weber

Satellite	NOAA6	NOAA9	NOAA10
<b>Internat Design</b>	79-57A	84-123A	86-73A
<b>Object</b>	11416	15427	16969
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	307-07480828	307-89222401	312-26547395
<b>Inclination</b>	98-5000	99-0189	98-7436
<b>RAAN</b>	318-1542	267-0251	339-8730
<b>Eccentricity</b>	0-0012787	0-0015717	0-0014554
<b>Arg of Perigee</b>	33-4085	115-9787	124-0419
<b>Mean Anomaly</b>	326-7897	244-3005	236-2147
<b>Mean Motion</b>	14-24959779	14-11457336	14-22474587
<b>Decay Rate</b>	1-1e <sup>-6</sup>	1-62e <sup>-6</sup>	-1-9e <sup>-7</sup>
<b>Orbit Number</b>	38157	9753	733
<b>Beacon Freq.</b>	APT=137-5 DSB=136-77	APT=137-62 DSB=137-77	137-5

Satellite	METEOR 2/12	METEOR 2/13	METEOR 2/14
<b>Internat Design</b>	85-13A	85-119a	86-39A
<b>Object</b>	15516	16408	16735
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	312-96537809	312-09477722	293-44694819
<b>Inclination</b>	82-5360	82-5328	82-5342
<b>RAAN</b>	341-1634	256-7874	297-9405
<b>Eccentricity</b>	0-0015074	0-0018002	0-0013632
<b>Arg of Perigee</b>	263-9382	89-2286	209-0294
<b>Mean Anomaly</b>	96-0057	271-0923	151-0110
<b>Mean Motion</b>	13-83923447	13-84006107	13-83742428
<b>Decay Rate</b>	5-2e <sup>-7</sup>	1-17e <sup>-6</sup>	1-17e <sup>-6</sup>
<b>Orbit Number</b>	8948	4385	2020
<b>Beacon Freq.</b>		APT=137-3	

Satellite	METEOR 3-1	COSMOS 1602	COSMOS 1766
<b>Internat Design</b>	85-100A	84-105A	86-55A
<b>Object</b>	16191	15331	16881
<b>Epoch Year</b>	1986	1986	1986
<b>Epoch Day</b>	313-98670695	323-89922782	285-79422121
<b>Inclination</b>	82-5512	82-5355	82-5271
<b>RAAN</b>	187-6414	124-1435	220-1264
<b>Eccentricity</b>	0-0019689	0-0023774	0-0025534
<b>Arg of Perigee</b>	150-4031	259-5323	40-6070
<b>Mean Anomaly</b>	209-8008	100-3202	319-7043
<b>Mean Motion</b>	13-16945767	14-73570394	14-73430933
<b>Decay Rate</b>	5-0e <sup>-8</sup>	6-64e <sup>-6</sup>	8-9e <sup>-7</sup>
<b>Orbit Number</b>	5033	15700	1118
<b>Beacon Freq.</b>	APT=137-85	APT=137-4	APT=137-4

Satellite	The Sun
<b>Epoch Year</b>	1990
<b>Epoch Day</b>	1,000
<b>Inclination</b>	23-4406
<b>RAAN</b>	0-000
<b>Eccentricity</b>	0-0167133
<b>Arg of Perigee</b>	282-7685
<b>Mean Anomaly</b>	357-6205
<b>Mean Motion</b>	0-002737778522
<b>Decay Rate</b>	0-000
<b>Epoch Rev</b>	1989
<b>Semi Major Axis</b>	149597870km

Note: The sidereal time conversion figure for 1990 is 0-27610467

State College was intended as a Federal Aviation Administration test and radar calibration satellite, and as a technical building project. It was launched by the "GASCAN" (Get Away Special CANister) from the Challenger Shuttle mission in April 1985 into a 370km circular orbit, and was tracked by NORAD until it burned out at 1051UTC 16 December last year, when it re-entered off the Pacific coast of Chile. It had never worked as intended, but, as it was made of Aluminium, we can bet it would have provided some superb meteor scatter if so employed, as the high temperature oxidation ions produced from total upper atmosphere incineration would have provided an excellent medium. With modern home microcomputers, Meteor Scatter adherents have a good chance of predicting these events, and might do well to run extreme DX scheds over the likely period calculated.

Practical Wireless, April 1987



59



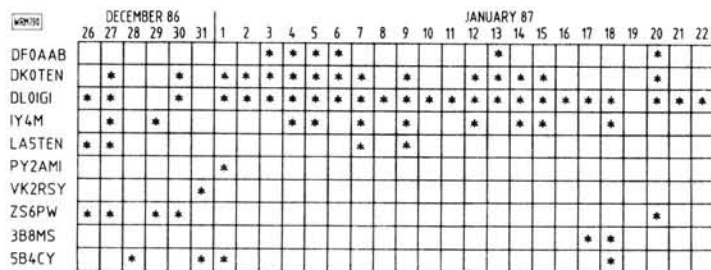


Fig. 1

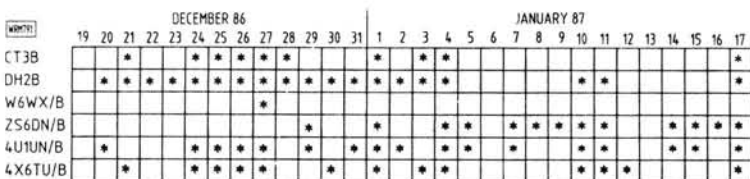


Fig. 2

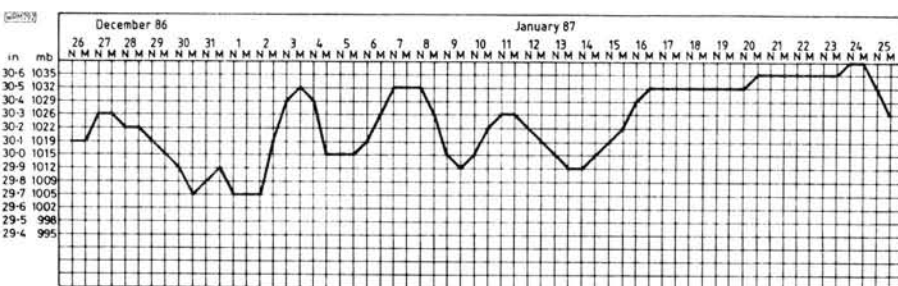


Fig. 3



Fig. 4

Fred Pallant, Gordon Pheasant and **John Willett G6TRR**, Stoke-on-Trent, for their 28MHz beacon logs. Using these I was able to compile Fig. 1.

"The 14MHz beacon chart, Fig. 2, shows how inconsistent the h.f. segment was between December 20 and January 18, with the NE/SW Finland and Madeira beacons being almost absent up to January 18 and the S/SE/NW aligned signals being fairly well in evidence for most of the time," wrote Len Fennwlow. He also logged signals from the v.h.f. beacons in Angus GB3ANG (144-975), Cornwall GB3CTC (144-915MHz) and Wrotham GB3VHF (144-925MHz) at widely varying strengths, each day from December 28 to January 17. He could just hear the Lerwick beacon GB3LER (144-965MHz) on the 28th and 17th.

Don Hodgkinson logged GB3CTC almost daily and GB3VHF every day throughout the month prior to January 20 and added the French beacon FX3THF (144-905MHz) on December 28 and January 6 and 20.

## Tropospheric

The atmospheric pressure, measured at my QTH, began this period on December 26 reasonably high at 30.1in and ended, falling rapidly, on January 25 from 30.7, Fig. 3. In fact, Ted Owen's barometer and my barograph only fell below 30.0 on December 30, 31 and January 1 and for a short period on the 9th and 14th.

During a mild lift on January 18 and 19, Dave Lingard reported that most of the normally just audible repeaters were fading in and out and GB3PI was workable for a couple of hours on the 18th and GB3MP was about 5 points above normal.

Chris van den Berg, received signals through the 144MHz repeaters in Belgium ONOAN and ONOOV on most days between December 20 and January 20. While the pressure was very high on the 18th, 19th and 20th he added Danbury GB3DA R5, Dover GB3KS R1, Maidstone GB3KN R4 and Wymondham GB3NB R1 to the list.

## 934MHz CB

"I've only been working the band for 9 months," said **Jim Willett CL-24**, Grimsby (Fig. 4) on December 30. He tells me that around a dozen stations are using 934MHz in his locality. While working from his car, some 160m a.s.l. during a lift on December 20, he contacted stations in Alderney, Berry Head, Bath, Bristol, Chelmsford, Exeter, Falmouth, Gloucester, Ipswich, Maidstone, Oxford, Ramsgate, Southampton and West Malling. All using a Cybernet Delta 1 transceiver and a Nevada PE7M mag-mount antenna. The best DX was with marine/mobile stations in Alderney, about 480km and Berry Head at 290km.

"Although the band was very quiet on January 3, I managed to work 35 stations whilst some 500m a.s.l., 11km south of Buxton," wrote **Anthony Jones AJ-26 G1UU1**, from Walsall. His log includes 16 contacts ranging from 40 to 64km, 9 at 80km, 3 at 96km and his best DX was MC-96 in Corby at 110km.

"Boxing Day proved a good day out for all who took the trouble to go to the high points," wrote **John Raleigh DW 4** from Bedford.

On January 3, **Bill Ellis WE-614**, Houghton-Regis, worked into Sussex. On the 18th, **John and Ralph Rowlett GR-587**, Upper Caldecote, had QSOs with

stations in Felixstowe, Ipswich and Sussex between them.

At midday on December 28, **John Levesley UK-627**, Bransgore, operating /M from the Purbeck hills—some 200m a.s.l.—, worked other mobiles at situated at Haytor, Medstead and Portsmouth at distances of between 70 and 120km. "A good example of flat conditions working," said John. During the evening of January 3, he found stations at 80km range about 3dB above normal and on the 19th, with a decaying high pressure system, he heard QSOs between stations in Chippenham, Jersey, Lyneham and Milton Keynes. John uses a Cybernet Delta-1 transceiver and a Nevada colinear antenna.

**Ian WDC-622**, Rotherham, tells me that while conditions were good, he had QSOs with stations in Durham, Norfolk and Surrey, which is good gen, but please Ian, I cannot reply to your letter unless you include your full name and QTH.

## Band II

It is with deep regret that I have to report the death of **Dr. Harold Brodribb** of St. Leonards-on-Sea, who, for many years, was a regular contributor to this and the television sections of my columns. In recent years he made a special and detailed study of the entire French radio network and how the signals from many of these stations changed or became audible at his QTH, in relationship to the atmospheric pressure. We extend our sympathy to Harold's family and to his many friends.

My thanks to **Stewart Russell**, Forfar, for the gen that on January 22, Edinburgh's Radio Forth, is changing frequency from 96.8 to 97.3MHz. "It is hoped that the signal will be much better for stereo users like myself," said Stewart.

**John Willett**, Stoke-on-Trent, recently installed a new Band II antenna and can usually hear a Belgian and a French station between 98 and 99MHz. "These two transmissions are there every day, sometimes dropping into the noise or being knocked out by official transmitters, but otherwise they are good propagation indicators," said John. Early in January, he logged bursts of signals from stations in France and Yugoslavia via meteor scatter.

My thanks to **Francis Hearne**, Ilford for the information that BRMB Birmingham, changed frequency from 94.8MHz to 96.4MHz on January 21 and that Radio 210, Reading, has extended its coverage from January 1 to cover the Basingstoke area on 102.9MHz.

I received strong signals from several French stations, between 94 and 103MHz, at 0812 on January 9, 1255 on the 18th, 1830 on the 19th, 0900 on the 20th and 0925 on the 25th.

## Tailpiece

And that is the end of *VHF Bands* in its present form and my thanks are due to you all for your past support. However, as from our next issue, I will be writing a new column devoted entirely to propagation and I will still look forward to receiving your letters, comments and reports about aurora, beacons, blackouts, meteor scatter, solar activity, Sporadic-E, sunspots and tropo-openings, in fact, anything that you think has upset the normal paths of radio signals. In future I will also be presenting a column, especially for the Band II enthusiasts, in our associate journal *Short Wave magazine*. See *Amateur Bands* for where you should send v.h.f. and h.f. band reports.

# TELEVISION

Reports: as for VHF Bands, but please keep separate.



by Ron Ham BRS15744

On December 25, **Simon Hamer** (New Radnor), glimpsed several pictures in Band I but could only identify Germany's ARD on Ch. E2 (48.25MHz) and Sweden on Ch. E3 (55.25MHz). However, on January 5 he saw Russian news on Ch. R1 (49.75MHz), complete with their BPEMR logo.

During the peak of the Quadrant meteor shower on January 3, I copied a multitude of small and some long persistence "pings" of synchronising pulses, via meteor trail reflection, from the various television transmitters that use Chs. E2 and R1. Although this was achieved by listening to these pulses on an ex-military R216 v.h.f. communications receiver, an adjacent television set, was tuned to the same channels to prove that the larger "pings" were strong enough to produce some very clear pictures for up to 10 seconds.

Simon Hamer identified strong meteor scatter signals, on the 3rd and 4th, on several spots in Band I from Austria, Czechoslovakia, Denmark, Italy, Poland, Spain, Sweden and the USSR by their test cards and/or programme captions.

At 1746 on the 3rd, **Dave Coggins** (Knutsford) logged "pings" on Ch. R1 and many 2-3 seconds bursts of pictures on Ch. E2 for most of that evening.

Highlights from the log sent by **Edwina and Tony Mancini** (Belper), for the period December 21 to January 19, include weather from Austria; ballet, ice-skating and the PRAHA logo from Czechoslovakia; "Fawlty Towers" with sub titles from Denmark; Lotto Toto and Wochenschau

from Germany; regional test cards scribed Bagn, Bremanger and Melhus from Norway; current affairs, news and sport from Poland; a nature programme about mice, news and an 18th century type play from Spain; football from Sweden and news, with the HOBCTN and RO/CCCP logos from the USSR.

## Tropospheric

Conditions on Christmas Day allowed Simon Hamer to watch a carol service in Gaelic from Radio Telefis Eireann-1 and Noel Edmonds' Christmas show on RTE-2 on Chs. D, F and H and G, I and J, respectively in Band III.

"Around midday on January 3 the barometer showed a slight fall from a very high pressure of 1032mb, which prompted me to try the set," wrote **George Garden**, while on holiday in Laurencekirk. As he hoped, George found very good conditions on the u.h.f. band and, despite a big hill to the south of him, he received a weak, but steady monochrome signal from Craigkelly and a strong colour picture from Black Hill. "It is very rare to receive the Craigkelly transmitter from this location," said George.

"Not much to report this time, although there has been a lot of high pressure," wrote **Noel Smythe** (Caerphilly) on January 20. However, he found the French Canal Plus on Ch. 5 was up most of the

time. He also saw RTBF, from Belgium, on the 10th and a very strong French station on Ch. 22 on the 18th.

I received Band III pictures from Belgium at 1830 on January 19 and from Belgium and Holland at 0900 on the 23rd.

## SSTV

Having moved QTH, **Richard Thurlow G3WW** (March) has spent a fair bit of time re-installing his antennas and gear and routing and screening feeder cables to reduce the level of computer hash generated by some of his equipment. Early in December he copied SSTV signals from two Italian stations, on 14.230MHz, with his /M antenna placed horizontally on chairs in his new shack. On the 29th, using his 2DYM trapped dipole, he exchanged 24 seconds colour pictures, on 3.735MHz, with G3QQD in Kent. Richard is also active on 144MHz, with a rotatable 9-element Tonna. Tests have proved that he can work all stations in the Fenland SSTV net as far away as Norwich.

"The last week has been very active from the USA," wrote **Les Hobson G0CUI** (Rotherham) on January 17. He exchanged pictures with K9SLQ, W5ZR, WA2CBA and VE3PT on 14MHz and stations in Germany, Poland and Sweden on 3.5MHz. "VE3PT is now active again on SSTV after being QRT on this mode for a few years," said Les. He now has 2 or 3 QSOs each week with this Canadian station.

At 1255 on Christmas Day, Dave Coggins copied a "CQ" on 14.234MHz from YU2RL.

## Photographs

Most readers record the highlights of their DXTV with a camera and, as usual, I




Fig. 1: Polish TV picture



Fig. 2: Spanish TV picture




Fig. 3: Spanish regional news caption



Fig. 4: Soviet news picture




Fig. 5: Belgian TV logo




Fig. 6: Belgian TV logo



Fig. 7: Indian TV service



Fig. 8: Jalandhar TV signal



Fig. 9: Rawalpindi TV signal



Fig. 10: Rawalpindi TV signal



Fig. 11: SSTV from Germany



Fig. 12: SSTV from Italy



have received a wide variety of pictures. These include cartoon programmes from Poland and Spain, Figs. 1 and 2, photographed by **Len Eastman** (Bristol), and a Spanish regional caption and an item from Soviet news, Figs. 3 and 4, by Noel Smythe and me, all received in Band I during the 1986 Sporadic-E season. Noel and I also copied logos from Belgium, Figs. 5 and 6, in Band III while the troposphere was open last October 4 and November 29, respectively.

During similar openings last year, **Major Rana Roy** (India), logged pictures from television services in India on Ch. 4, Fig. 7,

Julandhar Ch. 9, Fig. 8 and Rawalpindi Ch. 8, Figs. 9 and 10.

SSTV signals from Germany, Fig. 11, and Italy, Fig. 12, were received by **Peter Lincoln** (Aldershot) and Richard Thurlow, respectively.

## All Change

Thanks to the support of all my regular contributors and our readership in general, this television column was born and has grown up in *Practical Wireless* and now, as from next month, we are moving, your letters, pictures, text and scribe to *Short*

*Wave Magazine* with the prime object of adding long distance television to this specialised journal for the broadcast bands enthusiast.

**Reports and photographs for inclusion in SWM (May and June issues) should arrive with Ron by March 18 and April 23**

## MW BROADCAST BAND DX

Reports to: Brian Oddy G3FEX, Three Corners, Merryfield Way, Storrington, W. Sussex RH20 4NS



by Brian Oddy G3FEX

Due to the very considerable interest in listening, PW Publishing Ltd have purchased the *Shortwave Magazine* (SWM) and from the April issue they intend to transform it into an exciting new magazine devoted entirely to listeners and DXers. Some of the articles by contributors to "On The Air", including my "MW & SW Broadcast Band DX" series, are being transferred to the new publication and new contributors will also help to produce a magazine which will cover many bands and modes of reception.

A number of technical articles on subjects related to listening will appear in the new SWM including my "Newcomer SWL" series which will become a separate monthly feature to help those new to DXing. In view of this exciting news, you will no doubt want to be one of the first DXers to be mentioned in the new SWM, so please send along your I.m., m.w. and s.w. broadcast band reports to me to help make the new magazine the best ever for the listener!

Just to reassure you, with all these changes PW won't be abandoning the s.w.l. completely. There will be a number of new regular features covering the whole span of radio for the hobbyist.

## DX Report

(Note: All frequencies in kHz: Time UTC=GMT)

**Transatlantic DX:** The conditions have been generally very good and some interesting new stations have been logged by DXers this time. The signals from some of the more frequently mentioned stations located in Canada, N and S. America and the Caribbean have been heard before midnight and this fact has encouraged a number of listeners to take part in Transatlantic DXing for the first time during recent weeks.

The signals from CJYQ on 930 in St. Johns, NF, which are used by many DXers as a pointer to band conditions, have been rather weaker than usual, although they have been coming in early—in fact **George Morley** logged them during a listening session one night in Redhill at 2230. Another DXer who found the CJYQ signals to be rather poor at 2330 was **Alan Curry** up in Stockton-on-Tees. Some idea of their signal after midnight can be ascertained from the report by **Jim Willett** of Grimsby who noted SIO 333 in his log at 0150 and by **Rab Freeman** who logged them as SINPO 34433 in Port Glasgow at 0310.

Writing from Cardiff, **Alan Jarvis** says that he has not been able to hear

CJYQ once this winter although he has been hearing WINS 1010 and WHN 1050 in New York quite regularly. The "memory station" WMRE 1510 in Boston has been well received too and he picked up WCAU on 1210 in Philadelphia at 0044 for a new one, Alan has also been hearing WHDH 850 in Boston and WBAL 1090 from Baltimore. It is interesting to note that he has been hearing CFBC on 930 in St. John's, which is usually occupied by CJYQ! He also logged CFRB on 1010 in Toronto for the first time.

Many of the signals from the New York area have been reaching the UK well before midnight and one of the outstanding signals just now is WINS 1010. During one listening session Alan Jarvis logged them at 2230! Of course the conditions are not always good as Alan Curry discovered when he listened to a round-up of sports news via WINS at 0045, for reception was rather poor. **Roy Spencer** of Nuneaton also noted poor signals from WINS at 0459 one night and decided to take a look at the tropical bands instead!

Quite by accident, **David Edwardson** of Wallsend came across a broadcast in French on 1570kHz whilst he was tuning into various stations with his Trio R600 one night at 2300. To his amazement it proved to be CKLM in Montreal, Canada. He listened to their signal for nearly 45 minutes before deciding to look around the band to see what else he could find! It wasn't long before he logged his second station—the Caribbean Beacon, Anguilla on 1610 at 2359, which broadcasts Evangelical programmes and is often a good signal before midnight.

Loop antennas were mentioned in several of the reports—Alan Jarvis has been busy in Cardiff with the construction of his "Hula Loop" design (PW, October '86, page 64). He says he has sorted out the mechanics of supporting the thing so that it is stable, free standing and rotatable and hopes to have some results soon. **Alan Scholefield** of South Shields has an unusual hexagonal loop with a mean dimension of 1.3m nearing completion, so it will be interesting to hear how well it performs. **George Morley** has also been testing out a loop antenna ahead of his Trio R2000 receiver. During one night between 2330 and 0150 he logged three stations in New York, namely WNBC 660, WNEW 1130

and WHN 1050, as well as WMRE 1510 in Boston. From Canada he heard CBM 940 in Montreal and CKLM 1570 in Laval, PQ. During a subsequent night George heard several additional stations including WINS 1010 in New York and WCAU 1210 in Philadelphia and from Canada were CJYQ 930; CKCW 1220 in Moncton NB and CKLM 1570.


George has recently purchased a Sony ICF2001D and finds the ECSS mode of reception very good for DXing. Using the Sony between 2230 and 2359 with just its built-in ferrite antenna he logged three Canadian stations—CJYQ 930, CBM 940 and CKCW 1220; three from New York—WNBC 660, WINS 1010, WNEW 1130 and two from Boston—WBZ 1030 and WMRE 1510. Searching the band again the next morning at 0700 produced two stations from Canada—VOCM 590 in St. John's and CFRB 1010 in Toronto; also three stations from New York—WINS 1010, WBZ 1030 and WHN 1050.

**Rab Freeman** compiled his report during five nights of listening between 0130 and 0445. From the USA came two exciting commentaries on basketball games in the New York area, broadcast at 0210 by WNBC 660 and at 0235 by WNEW 1130; a "phone-in" programme at 0253 via WHDH 350; the news at 0300 from WCBS in New York on 880, a local weather report and a programme of "country" music followed by the station announcement of WHN 1050 at 0305. From Canada he picked up a programme of "morning music" from CKYQ on 610 in Grand Bank, NF at 0143; the news from Montreal at 0300 via CBM 940 and a weather report from St. John's, NF via CJYQ 930 at 0310.

**Rab** also logged VOCM 590 at 0205; WABC 770 in NY at 0247; WGY 810 Schenectady, NY at 0433; CHER 950 in Sydney, NS; WINS 1010; CJRP 1060 in Quebec, PQ; WCAU 1210; WMRE 1510; CKLM 1570 and on 1610 the Caribbean Beacon, Anguilla. He says that this list could have been extended by at least another 15 stations had he been able to establish positive identification.

Writing from Bristol, **Tim Shirley** says that he has been hearing a strong signal from Radio Globo in Rio de Janeiro, on 1210 in Brazil as early as 2130 and has sent them another report and now awaits their QSL. **Jim Willett** also noted their signal in his log—he picked them up with his Yaesu FRG-7 receiver at 0130 with SIO 322. Some of the other stations noted were VOCM 590 at 0130; CIYQ 680 in Grandfalls, NF at 0200; WHIN 1010 Gallatin, TX at 0230; WBAL 1090 at 0250; WTOP 1500 in Washington at 0225 and the Caribbean Beacon, Anguilla 1610 at 0330. **Jim** managed to log five stations which have not been reported before in this series so they are subject to confirma-





**£39.95**

**NEW AUTOMATIC ANTENNA ROTATOR** – Aerial Techniques introduce their new automatic, economical rotator system for improvement of radio and television reception. Ideal for **DXing** and domestic use (pull in alternative out of area ITV regions), the full mount rotator accommodates ALL types of TV & FM aerial, large or small, having 192 lbs/in of motor torque. The system consists of two major components, the automatic control box and the rotor head unit, the vertical carrying capability of the latter is 45kg. The additional Support Bearing may be used for heavier load applications (up to three aerial arrays may be employed, depending on size). The attractively styled Control Console features continuous indication of beam/aerial heading, telling you the aerials position at all times. Bracket for Rotator support mast up to 52mm (2" approx) in diameter, stub/rotation mast is up to 40mm (1½" approx) in diameter.

**KINGROTATOR** Automatic Antenna Rotator and Control Console (uses 3 core cable) ..... **£39.95**

**SUPPORT BEARING** for heavier load applications ..... **£13.95**

**YOKO** model F1 VHF/UHF Multiband 5" screen Television. System B/G/I operation (5.5/6MHz sound) for UK & Continental use, ideal for **TV-DXing**, covers Bands 1, 3 & UHF; 12v battery & Mains operated (SAE leaflet) ..... **£89.95**

(Carriage & insurance on above television £4.95)

'A **TV-DXers Handbook**' completely new and revised edition by Roger Bunney, a must for ALL DX enthusiasts ..... **£5.95**

We are the specialist aerial company for all installations – domestic, fringe, distribution and **DX**. Try our comprehensive and illustrated **Catalogue** at 65p full of all the latest equipment, please include SAE with any other enquiries.

All prices inclusive of VAT & Carriage. Delivery normally 7-10 days.

**ACCESS & VISA** Mail and Telephone orders welcome.



**AERIAL TECHNIQUES (PW)**

11, Kent Road, Parkstone,  
Poole, Dorset, BH12 2EH. Tel: 0202 738232.



## ANTENNA TUNER

For outside or **INDOOR** antennas, end-fed **LONG WIRES** or dipoles, **BOOST DX** and reduce interference 100KHz-30MHz in 6 overlapping ranges, **IDEAL** for FRG7700 etc or 10W tx, **BAND-PASS** design with pre-wound high Q coils and expensive air dielectric capacitor **only £28.20**, get **MORE DX**.

**ANTENNA NOISE BRIDGE £24.20**, test your antenna.

**RARE DX UNDER QRM?** DIG it OUT with a **Tunable Audio Notch Filter**, between receiver and extension speaker, **BOOST** your DX/QRM ratio, 40dB notch, **£19.90**, hear **WEAK DX**.

Each fun-to-build kit (ready-made to order) includes **ALL parts**, **CASE**, pcbs are fibre glass, instructions, by-return postage, (Europe same, Giro 21.923.4000) and list of other kits.

## CAMBRIDGE KITS

**45 (PR) Old School Lane, Milton, Cambridge.**

## SUMMER JOBS IN THE USA FOR 1987

American children's summer camps are seeking bright, enthusiastic young people (aged 19½-35) to live with and teach amateur radio skills to children from mid-June to mid/end August. Return flight, special work visa, food and accommodation arranged **PLUS \$300-\$350** pocket money for the season. A challenging and rewarding programme for those who don't mind hard work and who have a genuine regard for children. If you have the relevant experience, and would like further details of this fantastic opportunity to work and travel in the USA (for up to 6 weeks after camp), please contact:

**Paul Wilson**  
**BUNACAMP**

**232 VAUXHALL BRIDGE ROAD**  
**LONDON SW1V 1AU**  
**TEL: 01-630 0344**

## S.E.M.

**UNIT P, UNION MILLS, ISLE OF MAN**

Tel: MAROWN (0624) 851277

**S.E.M. QRM ELIMINATOR.** Do you suffer from local QRM. Motors, power lines, TVs, local station, computer? We can stop it, with this entirely new concept developed by us. Phase out your local problem. 1.8-30MHz.  
**£85 Ex-stock.**

If you don't believe it's true, try one for 10 days, if it doesn't solve your problem, we'll refund, less £5 to cover costs. We have many delighted owners now, who can't speak too highly of performance. With comments such as "I can operate for the first time for years" or "you have got a winner".

**NEW S.E.M. Dummy load.** 100W with dummy load/through switch. So you leave it plugged in. **£22.00** Ex-stock.

**NEW S.E.M. TRANZMATCH.** Now has a switch to select **DIRECT** to aerial, **BALANCED** or **UNBALANCED** or **DUMMY LOAD**. The matching unit retains its tremendous versatility capable of matching virtually any aerial to 50 ohms at up to 1kW, balanced or unbalanced. The link coupled output isolates the aerial from the rig, which can cure TVI both ways. Their robust construction is proved by the ones in daily use for 15 years. 1.8-30MHz £110. Ezitune built in £39.50 (see below). Built in dummy load £8.90 Ex-stock.

**S.E.M. 2 metre Transmatch**, match your aerial, 1KW max. **£32.00** Ex-stock.

**S.E.M. EZITUNE.** Do you use an antenna matcher? You need our Ezitune to tune it to your frequency without transmitting. Listen to the S9+ noise on your receiver and adjust your aerial tuner for a dip in the noise and you are matched up to 50 ohms (1:1 SWR). Protect your radio and stop tuning QRM. **£45** boxed, or p.c.b. + fixing bits and instructions to fit in any A.T.U. **£39.50**. Ex-stock.

### VERY WIDE BAND PRE-AMPLIFIERS

They cover from 3-500MHz with a noise figure of 1.5dB and an unprecedented +30dB 3rd order 1P at the INPUT. This means that they are quite exceptional in handling very strong signals, very important on wideband pre-amps. Gain is 9dB.

We make three types. Straight pre-amp, this has a signal loss if you switch it off, **£32.00**. One which switches to "straight through" when switched OFF, can be used for transmitting through (100W) if supplied with 12V on receive and 0 on TX, costs **£37.00**. An R.F. switched unit is **£45.00**. All Ex-stock. We are continuing to make our highly acclaimed dedicated 2 Metre pre-amps with adjustable 0-20dB gain and 1dB N.F. Receive only **£21.90**. R.F. switched **£34.00** and with 240V P.S.U. **£39.00**. Ex-stock.



### CONVERTERS for LF, MF, HF, VHF, UHF.

Our new H.F. CONVERTER opens new horizons for receivers, use with the new all mode V.H.F., U.H.F. receivers FRG9600 and ICR7000, extends their coverage down to 100KHz, giving you LF, MF, HF, VHF and UHF. You tune your RX from 100MHz up, e.g. 103.500 is 3.5MHz. It has two aerial sockets, one for H.F. into the converter and one for V/UHF switches straight through into your RX when you switch the converter OFF, i.e. No plugs to change. All this for **£45.00**. Ex-stock.

**R.F. NOISE BRIDGE.** If you are experimenting with aerials you need one of these units. Tells you the resonant frequency and impedance of your aerials and also invaluable for measuring ¼, ½, etc., wavelength of feeders, etc. **£45.00**. Ex-stock.

**WAVEMETER.** A pretty little absorption wavemeter, to satisfy the licence conditions. 1.5-30MHz with a meter indication. **£39.50**. Ex-stock.

**IAMBIC KEYS.** We use the world famous CURTIS chip which eliminates the little idiosyncracies common in other keys. Opto-isolators from the chip ensure that R.F. can't get in, a common problem with multi-chip keys. Compatible with any TX. **£45.00**. An excellent twin paddle key often mistaken for ones costing several times more at **£19.50**. Ex-stock.

**2 METER LINEAR POWER AMP/PRE-AMP.** People are constantly telling us that comparing different makes our Pre-amp is best. (See Pre-amps for spec.) Three models. Sentinel 40 14x power gain e.g. 3W IN-40W OUT. Ideal for FT290 **£85.00**. Sentinel 60, 10W IN-60W OUT **£95.00**. Sentinel 100 10W IN-100W OUT **£135.00**. All Ex-stock.

**AUDIO MULTIFILTER.** Has fully adjustable **BAND PASS**, **HIGH PASS**, **LOW PASS** and 2 **NOTCH** filters. From 2.5KHz to 20Hz. Making the most versatile filter available. **£75.00**. Ex-stock.

**T.V.I.** Our Braid Breaker/High Pass Filter cures T.V.I. by plugging into the TV aerial socket. **£7.50**. Ex-stock.

**S.E.M. SWITCH.** 3 way ant. switch + 4th position to earth. 1kW. S0239S D.C.-150MHz. **£23.00**. Ex-stock.

**12 MONTHS COMPLETE GUARANTEE INCLUDING ALL TRANSISTORS.**

Prices include VAT and delivery. C.W.O. or phone your CREDITCARD No. Ring or write for further data. Orders or information requests can be put on our Ansaphone at cheap rate times.

tion by QSL, namely KCLG 1210 in Washington, UT at 0030; WGAR 1220 in Cleveland, OH at 0200; WLAM 1470 in Lewiston, ME at 0345; WOKJ 1550 in Jackson, MS at 0400 and XEHI 1470 at 0315 from Mexico.

A short period of exceptionally good conditions can provide much excitement for many dedicated DXers—one of them, **Derek Taylor** of Preston, recently had the thrill of hearing the identification callsign KING of a low power station in Seattle, USA on 1090. Their signal gave comfortable listening without the need for headphones and their callsign was clearly received. Derek says, "if this is confirmed, it will probably be a once in a lifetime catch for me as I don't think conditions as good as that will be repeated for some time". Derek mentioned that he will be going up to Cape Wrath, N. Scotland in March with Barry Davies for a DXpedition. It was at Cape Wrath that the first ever logging from Alaska on medium wave took place in 1985, when John Faulkner heard KBRW in Barrow, Alaska on 680—his reception was subsequently confirmed.

**Other DX:** Using a Vega 206 receiver in Tunbridge Wells, **Darren Taplin** has been checking the SINPO ratings of some of the international broadcasts to Europe which reach him via the sky wave path at night—RBI Berlin, GDR 1359 rated 44433 from 1915; Radio Polonia, Warsaw 1503 was 44444 from 2230 and RSI Stockholm, Sweden 1179 was 44544 at 2300. Darren also logged the signals from two transmitters in Yugoslavia—Ljubljana 918 was 44433 at 2259 and Zagreb 1134 was 54544 at 2200.

A Vega 206 portable receiver was also used by **Geoff Blakey** to enjoy some DXing at two locations. While in Deal, Kent he logged many stations during three evenings including five in W. Germany—AFN Frankfurt 873, RIAS Berlin 873, AFN Stuttgart 1143, VOA via Munchen Ismaning 1197 and Mainflingen 1539; also Lushnje, Albania 1395; RTE-2 Athlone, S. Ireland 612 and Solvesburg, Sweden 1179. While DXing during the evening in Gosport he logged three stations in S. Ireland, namely RTE-1 Tullamore 567; RTE-2 Athlone 612 and Dublin 1278. Also noted were RNE-1 La Coruna, Spain 639; AFN Frankfurt 873; Radio-1 Milano, Italy 900 and BBC Ulster via Lisnagarvy, N. Ireland 1341.

Philip Rambaut has been conducting a survey of the l.w. and m.w. bands at noon in Macclesfield. A total of 16 long wave stations and 86 official medium wave stations were logged—38 of these were local radio stations! Some of the transmitters operating on the l.w. band use very high power and their signals cover considerable distances by day or night. Those logged were Donebach 153, W. Germany (500kW); Allouis 162, France (2000kW); Kaliningrad 171; USSR (1000kW); Oranienburg 177, E. Germany (750kW); Saarlouis 183, W. Germany (200kW); Motala 189, Sweden (300kW); BBC Droitwich 200 (400kW); DLF Munich 209, W. Germany (500kW); Roumoules 218, Monaco (1400kW); Konstantinow 227, Poland (2000kW); Junglinster 236, Luxembourg (2000kW); Kalundborg 245, Denmark (300kW); Tipaza 254, Algeria (1500kW); Burg 263, E. Germany (200kW); Topolna

BBC Radio Jersey  
Broadcasting House  
Rouge Bouillon  
St. Helier  
Jersey  
Channel Islands



292 M / 1026 KHZ  
1 KW

Thank you for your reception report

on 22nd Aug. '86 at 1300 BST

We confirm you were tuned to  
BBC Radio Jersey

## QSL from Radio Jersey sent in by Simon Hamer

272, Czechoslovakia (1500kW) and Minsk 281, USSR (500kW).

Some of the more interesting m.w. signals which Philip noted stemmed from transmitters in several countries: Belgium—Wavre 540 and 621, Wolvertem 927 and 1512; Czechoslovakia—Praha 639 and 1287; Denmark—Kalundborg 1062; France—Rennes 711, Lille 1071, Nancy 1350; Germany—Bayreuth 549, Frankfurt 594, Muhlacker 576, Hamburg 972, Wolfshelm 1017, Burg 1044, Neumunster 1269, Heusweiler 1422, Mainflingen 1539; Holland—Lopic 675, Flevoland 747 and 1008; Isle of Man—Foxdale 1368; Luxembourg—Manach 1440; Monaco

### DXers

- 1 Maurice Andries, Dendermonde Belgium
- 2 Geoff Blakey, Deal
- 3 Colin Diffell, Corsham
- 4 Rab Freeman, Port Glasgow
- 5 Michael Hill, Stockton-on-Tees
- 6 Alan Jarvis, Cardiff
- 7 Philip Rambaut, Macclesfield
- 8 Roy Spencer, Nuneaton

Freq (kHz)	Station	ILR BBC	1	2	3	4	5	6	7	8
603	Invicta Sound	I		D				D	D	D
630	R. Cornwall	B						D	D	D
630	R. Bedfordshire	B		D	D			D	D	D
657	R. Clwyd	B				N	D	D	D	D
657	R. Cornwall	B						D		
666	Devonair R.	I			D			D		
666	R. York	B				N		D		
729	BBC Essex	B		D						
756	R. Cumbria	B				D	D			
756	R. Shropshire	B			D			D	D	D
765	BBC Essex	B		D						
774	R. Kent	B		D						
774	R. Leeds	B					D		D	D
774	Severn Sound	I			D			D	D	D
792	Chiltern R.	I		D				D	D	D
801	R. Devon	B			D	N		D	D	D
828	2CR	I						D		
828	R. WM	B							D	D
828	R. Aire	I					D			
828	Chiltern Radio	I						D		
837	R. Leicester	B			D			D	D	D
855	R. Devon	B						D		
855	R. Norfolk	B		D					D	
855	R. Lancashire	B				N			D	D
873	R. Norfolk	B		D					D	D
936	GWR	I			D			D	D	
954	Devonair R.	I						D		
954	R. Wyvern	I			D			N	D	D
990	R. Devon	B				N		D		
990	Beacon R.	I						D	D	
999	R. Solent	B			D			D		
999	Red Rose R.	I				N	D		D	
999	R. Trent	I								D
1026	Downtown R.	I				N				
1026	R. Jersey	B		D				D		
1026	R. Cambridgeshire	B		D					D	D
1035	R. Sheffield	B					D		D	
1035	R. Kent	B		D				D		
1035	Northsound R.	I				N				
1035	West Sound	I				N		D		
1107	Moray Firth R.	I				N				
1107	R. Northampton	B			D				D	D
1116	R. Derby	B						D	D	D
1116	R. Guernsey	B			D			D		
1152	LBC	I		D		N				
1152	R. Clyde	I				N				
1152	Metro Radio	I					D			
1152	BRMB	I			D			D		D
1152	Picadilly R.	I							D	
1152	R. Broadland	I		D	D			N		

Freq (kHz)	Station	ILR BBC	1	2	3	4	5	6	7	8
1161	R. Sussex	B		D	D					
1161	R. Tay	I				N				
1161	Viking R.	I				N				
1161	GWR	I			D				D	
1161	R. Bedfordshire	B							D	D
1170	Swansea Sound	I						D		
1170	R. Orwell	I		D	N					
1170	Signal R.	I							D	D
1242	Invicta Sound	I		D	N			N	D	D
1251	Saxon Radio	I			D					
1260	GWR	I			D			D		
1260	Marcher Sound	I				N			D	D
1260	Leicester Sound	I								D
1278	Pennine R.	I							D	D
1305	Red Dragon	I			D			D		D
1323	R. Bristol	B			D	N		D	D	D
1323	Southern Sound	I				N			D	D
1332	Hereward R.	I						N	D	D
1359	Essex R.	I		D						
1359	Red Dragon	I			D	N		D		
1359	Mercia Sound	I				N			D	D
1431	Essex R.	I		D				N		
1449	R. Cambridgeshire	B							D	D
1458	R. London	B		D	D	N				
1458	R. WM	B							D	D
1458	R. Manchester	B				N			D	
1458	R. Newcastle	B				N	D			
1458	R. Devon	B						D		
1476	County Sound	I				N			D	D
1485	R. Merseyside	B				N			D	D
1485	R. Oxford	B						D		
1503	R. Stoke-on-Trent	B							D	
1521	R. Mercury	I		D		N				
1521	R. Nottingham	B							D	D
1530	Pennine R.	I				N			D	D
1530	BBC Essex	B		D		N				
1530	R. Wyvern	I						D		D
1548	Capital R.	I		D	D	N			D	D
1548	R. Bristol	B			D			D		D
1548	R. Forth	I				N				
1548	R. City	I							D	D
1557	Hereward R.	I				N			D	D
1557	Ocean Sound	I			D	N		N	D	
1584	R. Nottingham	B				N			D	
1584	R. Shropshire	B								D
1584	R. Tay	I				N				D
1602	R. Kent	B							D	D

Key: D—Day; N—Night



—Monte-Carlo 1467; Norway—Kvitsoy 1314; Poland—Wrocław 1206; Sweden—Sölvesborg 1179; UK—BBC Dumfries relay (2kW) 585, BBC Wallasey relay (0.5kW) 1107, BBC Llandrindod Wells relay (1kW) 1125; USSR—Kaliningrad 1143.

The broadcasts from Manx Radio, Isle of Man on 1368 may be received during daylight hours by those listeners who have a fairly clear path towards the island—especially if there is a large stretch of sea involved in the path, such as to Cornwall. For most of us it is not possible to hear their signals until darkness falls—reception then takes place via the skywave path to many areas. Some idea of their signal in Edinburgh during the evening can be ascertained from the SINPO 43334 which **Robert Taylor** noted in his log while listening to their football results at 1745. **Michael Hill** has also been getting good reception of their programmes in Stockton-on-Tees around 2330.

For those listeners who send along a detailed report to Manx Radio they have an attractive QSL card and some interesting literature about the history of their station. No doubt they will be very surprised to receive a report from Rab Freeman who picked up their signal in Portugal at night while on holiday in Armacao De Pera, Algarve! Rab found there was quite a lot of fading present on their signal at 1812 and the overall rating was only 2—he managed to hear their signal on three nights while there.

Rab also logged several other signals at night from the UK—the strongest of them was the BBC Lisnagarvey, N. Ireland transmitter on 1341. Although he could hear BBC Radio 1 on 1053 and 1089, BBC Radio 2 on 693 and 909, BBC Radio 3 on 1215 and BBC Radio 4 on 200, it was not

possible to tell which transmitter was actually being heard. BBC Radio London on 1458 and ILR Capital Radio on 1548 were positively identified and both had an overall rating of 2/3. From S. Ireland, he logged RTE-1 on 567 and RTE-2 on 1278—taking your receiver with you on holiday can certainly prove to be very interesting!

The BBC Radio Scotland transmissions on 810 are being heard during daylight hours in Turku, Finland by **Kari Nieminen**, however it is not possible to say if the transmitter received in Burghhead or Westerglen since they both operate on the same frequency. At 1400 the signal is SIO 323 but at dusk much fading takes place as the sky wave signal arrives. Kari also listens to Radio NRK Kvitsoy, Norway on 1314—he says their signal is SIO 544. The signals from BBC Radio Scotland on 810 are also reaching **Maurice Andries** in Dendermonde, Belgium during daylight with SINPO 23443. Some of the other signals which reach him during daylight originate from BBC transmitters in Orfordness 684 and 1296 and Lisnagarvey 1341. He can also hear BBC Radio 1 on 1053 and 1089 and Radio 2 on 693 and 909 which use numerous transmitters around the UK.

While tuning around the m.w. band in the evening, Tim Shirley picked up two stations in Greece—Athina 729 at 1900 and Kerkira 1008 at 2000. He has also been hearing Solt, Hungary 540 at 2030 and two stations in Roumania—Baia Mare 1404 at 1830 and Baneasa 1593 at 0024. Moving down to the l.w. band he logged Brasov, USSR on 153 at 1745. **John Nash** has been checking the l.w. band in Brighton to see if he could hear the International Service of Radio Finland on 254—this originates in Helsinki and is broadcast to Europe from a transmitter in Lahti. Reception

proved to be impossible due to the very strong signal from Tipaza, Algeria on that frequency.

The 1000kW medium wave outlet of Radio Moscow's World Service in Kaunas, USSR on 1386 was noted in the report from Roy Spencer—they broadcast to Europe at 2200. Roy also logged TWR Monte-Carlo, Monaco on 1467 at 2245—their transmission to Europe commences at 2200 but it is seldom mentioned in reports. It is not often that the two Italian stations logged by Alan Jarvis are mentioned either, namely Rome on 846 and Milan on 900.

RNE-1 Madrid 585, Spain; Algiers 891, Algeria and Radio Las Palmas 1008, Canary Islands were received by **Alexander Little** in Glasgow between 2145 and 2230.

## Local Radio DX

There have been even more stations logged this time—see chart.

My thanks to **Neil Oakley** of Whitstable, Kent for pointing out that the new BBC local radio station in Essex is called simply BBC Essex and not BBC Radio Essex. It seems that signals from the BBC Essex m.w. transmitters are being well received in many areas—can you hear them?

## QSL Addresses

ILR Plymouth Sound, Earl's Acre, Alma Road, Plymouth, PL3 4HX.

ILR Piccadilly Radio, 127/131 The Piazza, Piccadilly Plaza, Manchester, M1 4AW.

ILR Radio Tay, P.O. Box 123, 6 North Isle Street, Dundee, DD1 9UF.

**Deadlines for May and June SWM are March 18 and April 23**

# SW BROADCAST BANDS

Reports: as for Medium Wave DX, but please keep separate

## For the Newcomer SWL

In order to avoid some of the r.f.i. problems, which were discussed last month, it is necessary to install any short wave antenna as far away as possible from the noisy electrical environment which exists in most houses. That way any direct pick up of interference by the antenna is avoided or reduced.

The tiny wanted signals from a remote antenna needs to be conveyed without picking up unwanted interference on the way. It's necessary to use an **r.f. transmission line** or **feeder** system. Non resonant

transmission lines and the reasons for the use of both balanced and unbalanced feeders were discussed in *PW* Feb '87.

To ensure that the wanted signals reach the receiver with as little loss as possible it is important that an impedance match exists at all points along system. Although a good match can be obtained between a low impedance 72 balanced feeder and the centre of a halfwave or dipole antenna when operated on its fundamental resonant frequency (*PW* Feb '87), let us now



by Brian Oddy G3FEX

consider what happens if one attempts to use a dipole on harmonically related frequencies. Note: the 2nd harmonic is twice the fundamental frequency, the 3rd harmonic is three times the fundamental frequency etc.—there is no 1st harmonic, since one times the fundamental is the fundamental!

The voltage, current and impedance distribution along antennas one, two or three halfwaves long was shown in *PW* Dec '86. This indicated that although the impedance at the centre of a single half-wave is low, the impedance at the centre of a wire two halfwaves long (a fullwave) is very high. It is also showed that the impedance at the centre of a three half-wave wire is low. In fact this pattern repeats itself as the number of halfwaves is increased and it is important to understand that the impedance is only low at the centre of a wire when there are an odd number of halfwaves present along it. This means our dipole can only be used effectively on the fundamental and odd harmonic frequencies, since there will be a total mismatch at all other frequencies.

Now consider some practical aspects of a dipole cut to resonate on a fundamental frequency on the 7MHz (41m) band with a third harmonic in the 21MHz (13m) band, where it resonates as a three halfwave centre-fed antenna. Perhaps most important for the s.w.l. is there will be a change in the directivity of the antenna, because the radiation patterns of a dipole and a three halfwave antenna are quite different (*PW* Dec '86). The maximum response to incoming signals will no longer be at right angles to the antenna but from four main directions at 45° to the wire.

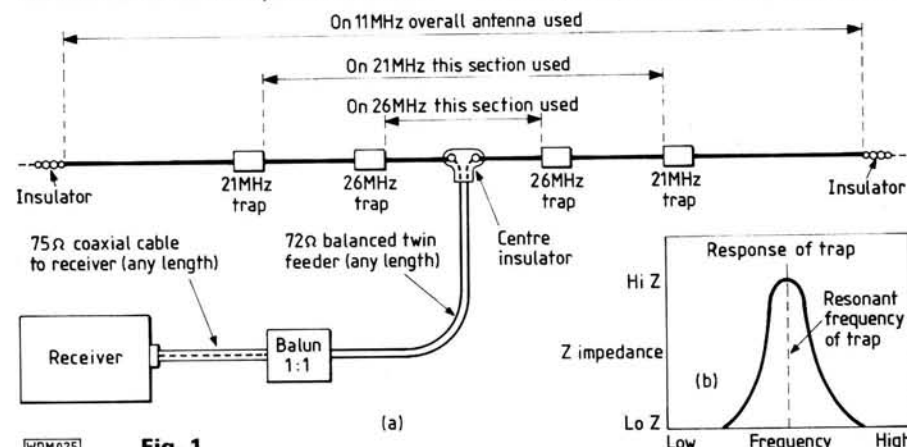


Fig. 1



Resonance in the 13m band will not be exactly three times the fundamental frequency. The formula for calculating the length of the dipole allowed for end effect and the amount required for three half-wave operation will be different (PW Dec. '86). Since the centre feed point impedance of a three halfwaves antenna is about 95 there will be a slight mismatch to the 72 balanced feeder (1.3:1), but for receiving purposes this can be ignored.

A single dipole antenna will prove to be of limited use to most s.w.l.s and while some locations may allow several dipoles to be erected, but unfortunately for most of us such a scheme must remain a figment of the imagination! Some method of adapting a simple dipole is therefore required.

One simple idea is to connect several dipoles in parallel across the feed point of an existing dipole, each new one added being resonant on another band. Supporting them can be quite a problem, they don't all have to run in the same general direction. Although such a system will work quite well, it can be very unsightly!

Another simple idea is to attach extension wires of suitable lengths between insulators at each end of an existing dipole. To change frequency, the antenna is lowered and "jumpers" are used so that the additional wires are brought into use, thus lowering the resonant frequency of the system.

Having to lower the antenna each time is inconvenient, and the "jumper" wires tend to corrode easily.

A system developed from this idea use parallel tuned switching circuits called traps to automatically "jumper" into use the extension wires as the frequency of reception changes is called a trap dipole—see Fig. 1a. The response of a parallel tuned circuit is shown in Fig. 1b—note that the impedance is very high at resonance and low at all other frequencies. It is this property which allows the traps to act as insulators at their resonant frequency and yet provide a connection to the outer extension wires at other frequencies.

The inductance of the coils which form the traps reduce the overall antenna length needed and this may help considerably where space is a problem. Suitable traps, complete kits of parts or ready made trap dipoles which cover all the s.w. broadcast bands are available commercially from advertisers in PW.

## Conditions on 25 and 21MHz

(Note: Frequencies in MHz. Time in UTC = GMT)

Occasional openings may happen on the 25MHz (11m) band but broadcasters in this part of the world probably won't start regular programmes for some time to come as to be effective a broadcast ser-

vice must be fairly reliable. I wonder how well "down under" receive the VOA Poro, Philippines relay transmitter on 26-000 from 0000–0200.

Reception has been variable on the 21MHz (13m) band with unstable conditions. The band closes soon after dark here. Radio RSA in Johannesburg, S. Africa on 21-590 heads the popularity list in the UK. They broadcast towards Europe from 1000 until 1556. John Nash (Brighton) noted considerable variations in their signal over two weeks ranging from SIO 111 to 444. Their programmes are in Portuguese, English and French and they welcome comments and reports. **Leslie**

A Gregory Adrian, London.  
B Leslie Biss, Knaresborough.  
C Alan Curry, Stockton-on-Tees.  
D Roy Degg, Stoke-on-Trent.  
E Neil Dove, Lockerbie.  
F David Edwardson, Wallsend.  
G Davy Hossack, Winchburgh.  
H Bill Kelly, Belfast.  
I Alexander Little, Glasgow.  
J Gerry Lovell, Weston-Super-Mare.  
K David Middlemiss, Eymouth.  
L George Morley, Redhill.  
M John Nash, Brighton.  
N Kari Nieminen, Turku, Finland.  
O Michael Osborn, Chelmsford.  
P Fred Pallant, Storrington.  
Q John Parry, Northwich.  
R Philip Rambaut, Macclesfield.  
S Bill Reid, Finchampstead.  
T John Sadler, Bishops Cleeve.  
U Tim Shirley, Bristol.  
V Leighton Smart, Trelewis.  
W Jim Willett, Grimsby.

Freq (MHz)	Station	Country	UTC	DXer
3.230	R. RSA	S. Africa	0301	I
3.235	AIR Gauhati	India	1659	I
3.270	SWABC Windhoek	Namibia	2300	I,W
3.355	AIR Kurseong	India	1600	H
3.365	GBC Radio 2	Ghana	2250	J,W
3.395	R. Zaracay	Ecuador	0230	W
3.903	AIR Delhi	India	2330	H,K
3.915	BBC Krankji	Singapore	0220	I,W
3.925	AIR Delhi	India	1625	H,I
3.925	NSB Tokyo	Japan	0744	F
3.940	PBS Hubei Wuhan	China	2340	F,H
3.945	NSB Tokyo	Japan	0749	F
3.965	RFI Paris	France	2310	H
3.980	R. Pakistan	Islamabad	1600	Q
3.985	SRI Berne	Switzerland	0755	H
4.005	RRI Padang	Indonesia	0300	W
4.060	R. Moscow Kharkov	USSR	1655	B,I,U
4.220	Xinjiang	China	1650	F,H,I
4.500	Xinjiang	China	2330	F,H,I
4.635	R. Dushanbe, Tadzhik	USSR	1706	I
4.725	BBS Rangoon	Burma	1457	G
4.735	Xinjiang	China	2345	F,S
4.740	R. Afghanistan	via USSR	1620	B,H,I
4.750	R. Bertoua	Cameroon	1845	H,P,R
4.760	ELWA Monrovia	Liberia	2012	F,I,O,P,U
4.760	Yunnan Kunming	China	1547	H,I
4.770	FRCN, Kaduna	Nigeria	1920	C,E,H,I,J,O,P
4.770	R. Mundial, Bolivar	Venezuela	0320	W
4.780	RTD	Djibouti	1655	F
4.785	R. Baku	USSR	1839	F,N,R
4.785	RTM Bamako	Mali	1850	P,R,S
4.785	R. Tanzania	Dar-es-Sal	1630	B,H
4.790	R. Atlantida	Peru	0735	F
4.790	Azad Kashmir R.	Pakistan	1614	F,I
4.795	R. Douala	Cameroon	2232	I,J,R
4.795	R. Ulan Ude	USSR	0152	F
4.800	AIR Hyderabad	India	1607	F,H,I
4.810	RSA	S. Africa	1703	P
4.815	R. diff TV Burkina	Quagadougou	2103	B,E,H,I,P,R
4.820	R. Botswana	Botswana	1855	B,E,F,I,J,P,R
4.820	La Voz Evangelica	Honduras	0240	G,I,W
4.830	Africa No. 1	Gabon	1930	A,B,C,D,E,F,H,I,M,P,R,T,U,V
4.830	R. Reloj	Costa Rica	0312	I,N
4.830	R. Tachira	Venezuela	0110	E,F,H,W
4.835	RTM Bamako	Mali	2000	A,D,F,H,I,J,P,R
4.845	R. Nacional, Manus	Brazil	2246	H,I
4.845	ORTM Nouakchott	Mauritania	1850	H,I,J,P,R
4.850	R. Capital, Caracas	Venezuela	0145	G
4.850	R. Columbia Pt	Costa Rica	0430	W
4.850	R. Yaounde	Cameroon	1800	H,I,J,U,W
4.860	AIR New Delhi	India	0026	I
4.860	R. Chita	USSR	2050	B
4.860	Kalinin	USSR	1832	D,R
4.865	PBS Lanzhou	China	2336	F,H,I,J,O,S
4.870	R. Cotonou	Benin	832	I,O,P,R

Freq (MHz)	Station	Country	UTC	DXer
4.880	R. Bangladesh	Dhaka	0110	F
4.880	SABC Radio 5	S. Africa	1845	B,C,E,F,G,I,L,P,Q,R,U,V
4.880	Swaziland Comm. R.	Swaziland	1800	H,I,R
4.885	R. Clube do Para	Brazil	0230	H,I
4.890	ORTS, Dakar	Senegal	1831	B,F,P,R
4.895	Ashkhabad	USSR	0024	C,E,K,L
4.900	R. diff Nat. Conakry	Guinea	1935	E,P,R
4.905	N'djamena	Chad	2200	F,H,P
4.910	R. Zambia	Zambia	2030	I,P
4.915	Accra	Ghana	2010	I,L,R
4.915	R. Anhangura	Brazil	0324	O
4.920	AIR Madras	India	1536	I
4.920	VLM4 Brisbane	Australia	0847	F
4.920	R. Nat. N'djamena	Chad	2110	B,E,H,P,R
4.920	R. Afghanistan	via USSR	1900	B,E,L,R
4.930	Ashkhabad	USSR	2046	I,L,Q
4.930	R. Tbilisi	USSR	1829	L,R
4.935	SWABC Windhoek	S.W. Africa	1645	B
4.940	Kiev	USSR	1550	F,I,R
4.940	R. Yakutsk	USSR	0455	H
4.945	R. Nat. Porto Velho	Brazil	2226	I
4.945	RSA	S. Africa	1840	E,L,P,R
4.955	RRI Banda Aceh	Indonesia	1559	F
4.958	Azerbaijan	USSR	2005	E,H,R
4.970	R. Rumbos	Venezuela	0300	I,W
4.970	Xinjiang	China	1623	F
4.975	Dushanbe	USSR	1650	E,H,R
4.980	Ecos del Torbes	Venezuela	2320	A,E,F,H,I,O,Q,W
4.990	FRCN, Lagos	Nigeria	1800	A,F,H,I,P,R,S,U
4.990	Radio RSA	S. Africa	2255	H,I
4.995	R. Ulan Bator	Mongolia	1750	P
5.005	R. Cristal La Paz	Bolivia	0200	U
5.005	R. Nacioal, Bata	Eq. Guinea	1825	J,R
5.005	R. Nepal	Khumaltar	1554	L
5.010	R. Garoua	Cameroon	1824	C,H,I,P,R,S
5.010	R. Singapore	Singapore	1550	I
5.015	Arkhangelsk	USSR	0720	H
5.020	ORTN Niamey	Niger	1823	I,R
5.025	R. Uganda, Kampala	Uganda	1822	R
5.035	Alma Ata	USSR	1941	B,H,L,R,S,U
5.035	R. Bangui	C. Africa	1822	I,R
5.040	George	USSR	2015	E
5.040	R. Tbilisi	USSR	1820	B,F,R
5.045	R. Cultura do Para	Brazil	2158	O
5.045	R. Togo Lome	Togo	1855	G,I,P,R
5.050	R. Singapore	Singapore	1647	I
5.050	R. Tanzania	Dar-es-Salaam	1828	R
5.057	R. Tirana	Albania	2240	E,I,M
5.060	PBS Xinjiang	China	0050	F,I
5.065	R. Candip	Zaire	0400	I
5.075	R. Beijing	China	2310	S
5.095	R. Pakistan	Islamabad	0053	I
5.095	R. Sutatenza, Bogota	Colombia	2258	E,I,J,O
5.260	R. Alma Ata	USSR	0145	F

## Stations heard chart




## FABULOUS SONY AIR-7 MONITOR

AM 150KHz-2194KHz AM 108-136MHz  
WFM 76-108MHz NFM 144-174MHz

The new Sony Air-7 is a superb new monitor having features so far unmatched in a single hand-held monitor by any other manufacturer. Its frequency coverage makes it ideal for airband, public service or marine band monitoring, plus normal domestic use. Highly sensitive, this receiver tunes everything you could ever desire in one package. The LCD digital display means clear frequency display even under bright illumination, and the PLL circuitry ensures drift free reception. Frequency is selected by keypad entry or electronic tuning and there is provision for disabling the keyboard. 10 memories are provided for each of the 4 main ranges (40 in total) and comprehensive scanning is provided in the bands 108-174MHz. Either full band or memory scanning is possible at a rapid rate. Additionally, delays may be programmed into each memory channel, certain channels only may be scanned and any channel can be designated the "priority" channel. Accessories include BNC helical, battery cartridge shoulder strap etc. Options available - rechargeable battery cartridge £15.95; Mains PSU charger £13.

£249


## PANASONIC DR-B600 COMMUNICATIONS RECEIVER



150kHz-30MHz AM/USB/LSB/CW £459  
(Send for brochure) FREE DELIVERY

A receiver for the enthusiast who wants a modern high performance base unit. Beautifully built by Panasonic for the DX'er. 150KHz-30MHz USB/LSB/AMW/AMN/FM (87.5-108MHz). Features include S-meter, Fast/slow tuning, 10 memories, scanning, RF gain, bass & treble controls, dial lock, and digital readout to 100Hz. Runs from 110/240V AC or 12V DC plus internal batteries. A high class communications receiver at a very competitive price. Send for brochure.

## "POCKET" COMMUNICATIONS RECEIVER! SONY ICF7600D



150KHz-30MHz AM/SSB

Undoubtedly the best compact portable available for serious short wave listening. Complete coverage 150KHz-30MHz without gaps. Good SSB reception plus AM and FM broadcast (78-108MHz). Digital display, 10 memories, built-in timer/clock, AC mains 110/240V PSU, etc. etc. You will be amazed at its performance. Definitely not a toy, but a purpose designed pocket communications receiver. Ideal for listening to the 80m ragchews or 70m DX whilst at the office, hotel etc. Supplies with every conceivable extra including case, antenna, and free broadcast frequency list. Act now before price increase!

£169

## THE COMPLETE VHF/UHF FREQUENCY GUIDE 26MHz-2.25GHz!

- ★ MARINE CHANNELS
- ★ CIVIL & MILITARY AIR
- ★ POLICE, FIRE, AMBULANCE
- ★ SPACE VEHICLES
- ★ HAM RADIO REPEATERS
- ★ UHF TV CHANNELS
- ★ FULL DUPLEX DETAILS
- ★ PMR
- ★ RADIOPHONES

THE COMPLETE VHF/UHF FREQUENCY GUIDE



£4.95  
p&p 70p

The book that every VHF/UHF listener should have beside him! Don't waste time hunting around in the dark. This guide will take you quickly and efficiently to the frequencies that interest you. Everything is listed including: MARINE, CIVIL & MILITARY AIR, POLICE, FIRE, AMBULANCE, SPACE VEHICLES, AMATEUR RADIO REPEATERS, FULL DUPLEX FREQUENCY INFORMATION, PMR CHANNELS, RADIOPHONES, CELLULAR RADIO etc. Now that's value for money! Beware the expensive American imports. This is designed for the UK listener. Order your copy today.

NEW

## NEW 1987 EDITION VHF/UHF AIRBAND FREQUENCY GUIDE

£5.95  
p&p 70p

118-400MHz PACKED WITH GEN!

Just published this is the UK's foremost list of military and civil frequencies. Nearly three times as much information as the 1986 issue and right up to date. Every conceivable airfield is listed from the smallest grass strips to the major civil airports. Also now included are full airways listings plus helipads and North Sea rigs. In addition there are listings of company frequencies, VOLMETs and miscellaneous air band frequencies. For the newcomer there is some interesting editorial text plus a very useful telephony designation list. Full colour semi-stiff cover plus illustrations and nearly 100 pages packed with information. Undoubtedly the best specialist publication available in this field.

## STOP PRESS! AVAILABLE EARLY APRIL: 4TH EDITION UK CONFIDENTIAL FREQUENCY LIST

The new 1987 edition of this well respected publication. Much expanded and completely updated. It guides you through the complete spectrum 1.6-30MHz. Listings include shipping, aircraft, military, RTTY news and embassy, FAX broadcasts, AM broadcast etc. £5.95 p&p 70p

# WATERS & STANTON

RETAIL & MAIL ORDER:- 18-20, Main Road, Hockley, Essex SS5 4QS.

Tel: (0702) 206835, 204965

RETAIL ONLY:- 12, North Street, Hornchurch, Essex RM11 1QX.

Tel: (04024) 44765

Visa and Access by telephone. 24hr. Answerphone.

We are pleased to introduce a new range of antennas shown thus (N). The dipoles have been redesigned and now include a fully sealed 'N' socket supplied complete with 'N' plug for coaxial cable. Absolutely NO matching or tuning required. Also a new 1296MHz 55 element yagi. Send for details.

<b>50MHz</b>	
5 element	£41.69 (a)
<b>144MHz</b>	
4 element (N)	£26.60 (a)
4 element crossed (N)	£34.96 (a)
9 element fixed (N)	£30.87 (a)
9 element portable (N)	£33.12 (a)
9 element crossed (N)	£57.86 (a)
13 element portable (N)	£46.00 (a)
17 element fixed (N)	£61.54 (a)

PLEASE ADD CARRIAGE AS SHOWN (a) £5.00 (b) £2.20. ALL PRICES INCLUDE VAT AT 15%

ACCESS - VISA - Just telephone your card number for immediate despatch.

FOR FULL SPECIFICATIONS SEND 40p FOR CATALOGUE

Callers welcome, but by telephone appointment only please. Goods by return.

**RANDOM ELECTRONICS (P)**

12 Conduit Road, Abingdon, Oxon OX14 1DB. Tel: (0235) 23080 (24 hours)

## ANTENNES TONNA (F9FT)

<b>435MHz</b>	
9 element (N)	£28.62 (a)
19 element (N)	£34.35 (a)
19 element crossed	£39.66 (a)
21 element 432MHz (N)	£44.57 (a)
21 element ATV (N)	£44.57 (a)
<b>144/435MHz</b>	
9 & 19 element Oscar	£39.66 (a)
<b>1296MHz or 1269MHz Oscar Uplink</b>	
23 element	£30.26 (b)
4 x 23 element - power splitter	
- stacking frame	£160.00 (a)
55 element	£46.20 (a)

POWER SPLITTERS - STACKING FRAMES  
PORTABLE ALUMINIUM TELESCOPIC MASTS

## COMMUNICATION CENTRE OF THE NORTH

The largest range of communications equipment available in the North. Full range of receivers, transceivers, antennas, power supplies, meters. Ali tubing - wall brackets - rotators - insulators.

We are the original amateur radio suppliers in the North West with 20 years experience in all types of equipment. Wide range of Base, Mobile, Antennas for all applications. Full range of equipment on display. Guaranteed after sales service. Official Trio stockist for North.

North west authorised Trio dealer. Also stockists for Tonna, Welz, G.Whips, Jaybeam, RSGB Publications, Diawa, Microwave Modules, Capco Antenna Tuners.

## RECEIVERS

Full range of receivers for all modes and frequencies.

TRIO R5000 General Coverage Receiver	£895.00
VC20 VHF Converter for R5000	£171.94
TRIO R2000 General Coverage Receiver	£637.26
VC10 VHF Converter for R2000	£170.76
JRC NRD 525 General Coverage Receiver	£1,195.00
CMK165 VHF/UHF Converter for NRD525	£391.35
HF125 General Coverage Receiver	£375.00
AR2002 Wide Band Scanning Receiver	£487.00
R532 Synthesised 100 Channel Airband Receiver	£224.00
R537S Hand Held Airband Receiver	£69.50
AT1000 SWL Antenna Tuner	£69.00

Please send SAE for full information and up-to-date prices as these fluctuate to change in sterling rates.

For the caller a wide range of Aluminium Tubing, Clamps, etc. at competitive prices, i.e. 12' x 2" Ali Tubing £9.00.

Full range of RSGB and ARRL publications in stock.

Part Exchanges welcome. Second hand lists daily.

Send S.A.E. for details of any equipment.

HP terms. Access/Barclaycard facilities.

Open 6 days a week. 24 Hour Mail Order Service.

Goods normally despatched by return of post.

Phone 0942-676790.

**STEPHENS JAMES LTD.**  
47 WARRINGTON ROAD,  
LEIGH, LANCs. WN7 3EA.

# PLEASE MENTION PRACTICAL WIRELESS WHEN REPLYING TO ADVERTISEMENTS



**Lyon** (Scarborough) says his reports usually cover a week of listening and they include favourable or unfavourable comments about the programmes, as both are usually acceptable. He has received several QSL cards from Radio RSA confirming reports.

UAE Radio Dubai on 21-605 also beam to Europe from 1000 until 1500. Programmes are mainly in Arabic with some interesting items in English. **Robert Taylor** (Edinburgh) uses a Toshiba RP F-11L receiver and its whip antenna to receive them SINPO 54445 in his log at 1045.

Other signals heard on 13m during daylight in the UK were detailed by **Philip Rambaut** (Macclesfield) Radio Cairo, Egypt on 21-465—programmes in Thai, Indonesian and Malay directed to Asia 1115–1445; Radio Nederlands on 21-480 in English to Asia via the Madagascar relay from 1130–1225; VOA on 21-550 in French for Africa from 1200–1330 via the Monrovia Liberia relay and NRK Norway on 21-700 (in Norwegian for E. Africa from 1200–1245).

**Simon Illingworth** (Johannesburg, S. Africa) says the 13m band has its "ups and downs", the BBC World Service is not always reliable. The BBC Masirah Island, Oman relay can be heard on 21-470 between 0900 and 1130, followed by a Daventry transmitter from 1130 until 1345. Sometimes the synchronised transmission at 1100 from Daventry and Rampham on 21-710 (intended for the Middle East and N. Africa) is a better signal.

During the morning Simon can usually hear Radio Nederlands, via the Madagascar relay on 21-485—signals to Asia are sometimes good around 1100, but often poor; RFI Berlin on 21-540—fairly good signals at 1000, programmes in English, Hindi, and German beamed to Asia from 0645 to 1445; Radio RSA on 21-590—ground wave usually very weak; UAE Radio Dubai on 21-605—fair at 1100 beaming towards Europe; RFI Paris on 21-620—in French to Africa from 0700–1500 signals often good around 1100; NRK Norway on 21-700—E. African broadcast fairly good at 1215; Radio Prague on 21-705—fair at 0900 programmes in English and Czech to Asia from 0730 to 0930; Radio Moscow on 21-725—World Service beamed to Africa from 0800 until 1500 but signals often weak by 1200.

Simon has been receiving good signals from the 100kW s.s.b. transmitter in Varburg, Sweden on 21-555 (u.s.b.) at 1200. The Swedish Home Service is beamed to the Middle East from 0930 until 1200 and Africa from 1200 until 1600. This is one of the few s.s.b. broadcasts, it is usually well received in the UK with a suitable receiver.

## The 17 and 15MHz Bands

The 17MHz (16m) band also is unreliable just now, although several continents can usually be heard during daylight the band closes during the evening in the UK.

Radio Australia's transmission to Asia on 17-715 can be heard 0830. English programmes are transmitted from Carnarvon, Western Australia 0100–0910. On 17-875 around 1138 FEBA in the Seychelles broadcasts in Arabic to the Middle East. **George Morley** (Redhill) logged them as SIO 122 recently, so don't expect a strong signal!

Programmes in Arabic and English from UAE Radio Dubai can be found on 17-775 between 1000 and 1500. **Alan Curry**

heard their news at 1036, SINPO 55545. A programme in Czech, intended for central Europe, is made by Radio Free Europe and transmitted from Gloria, Portugal on 17-835 from 0600 until 1700. Although seldom mentioned it has been heard at 0845 by **Maurice Andries** (Dendermonde, Belgium) SINPO 44434.

Radio Pakistan on 17-660 transmit a dictation speed news broadcast heard by **Sheila Hughes** (Morden). Their programmes commence at 0715 in Urdu, with items in English from 1005 to 1010 and from 1110 until 1115. Philip Rambaut mentioned the Cyclops, Malta relay of Radio DW, Cologne on 17-815, it beams programmes in Indonesian to S.E. Asia from 1330 until 1420. He also detailed the World Service in English on 17-655 and the Russian Service on 17-580 from Radio Moscow beamed to Africa between 0900 and 1600. He mentioned their transmission in Russian to Europe on 17-745 from 0900 until 1730.

Using a Trio R600 receiver plus a trap dipole antenna, **Leslie Biss** (Knaresborough) monitored Radio Japan via the Moyabi, Gabon relay on 17-785 from 1500. He noted some improvement and quotes SINPO 34333 instead of the 22333 mentioned last month. RCI in Montreal broadcast topics in six languages on 17-820. From 1300–1700 programmes in French and English are beamed to C. America and the Caribbean. Europe programmes in Russian, Ukrainian, English, French, Polish and German until 1800, their programmes in English and French are beamed to W. Africa until 2200. Signals are usually well received here, SINPO 44444 noted by Robert Taylor at 1615 is typical.

**Leighton Smart** (Trelewis) uses a Grundig 1400SL receiver plus a long wire antenna. He heard the VOA broadcast to W. Africa at 1600 via Bethany, E. USA on 17-785—this transmission ends at 2300. **Chris Wood** (Washington, Co. Durham) mentioned the programmes in English and Dutch from Radio Surinam at 1700—they are relayed to Europe via an RNB transmitter in Brazil on 17-755 until 1745.

The 15MHz (19m) band has been generally more reliable than the higher frequencies during daylight. The band has been staying open for several hours after sunset here. Many high power transmitters moved on to this band to provide a better service for the listener—unfortunately illegal jamming has increased too. Despite the jamming, countries can usually be heard during the day in the UK and some of them stem from unusual places too. **Bill Reid** (Finchampstead) logged KYOI in Siapan, N. Mariana Islands on 15-190 at 0839. **Sheila Hughes** logged KTWIR in Agana, Guam on 15-115 at 0830 (both worth looking up on a Great Circle Map!).

Some signals from a southerly direction have been coming in well. **Davy Hossack** (Winchburgh) logged the Voice of Nigeria on 15-120 at 0915. **David Middlemiss** (Eyemouth) heard news in English from Africa No. 1, Gabon on 15-200 at 0905. He also heard Radio Nederlands broadcast to E. Africa at 1630 via the Madagascar relay on 15-570. VOIRI in Tehran, Iran beaming to S.E. Asia and Australia was noted as SIO 333 by **Julian Wood** (Buckie) on 15-085 at 1100. **Alexander Little** (Glasgow) heard Radio RSA on 15-185 broadcasting in Swahili to Africa at 1600. **Neil Dove** (Lockerbie) logged them at 1540 on 15-220 at SINPO 44544. The BBC World Service via the Ascension Island relay on 15-400 was logged by Gerry Lovell (Wes-

ton-super-Mare) at 1430 using a Sony ICF 7600D and whip antenna. **Michael Osborn** (Chelmsford) noted Radio Portugal, Lisbon on 15-105 SINPO 55545 at 1612. **Gregory Adrian** (London) heard Morocco on 15-335 at 1458, broadcasting in Arabic. He also picked up the Kigali, Rwanda relay of Radio DW, Cologne at 1440 on 15-410.

**Bill Stewart** (Lossiemouth) heard from RCI in Montreal on 15-315 at 1530 broadcasting in French and English. **Tim Shirley** (Bristol) also heard RCI, but on 15-325 at 1600. Programmes for Europe on 15-325 start at 1430 and are in Russian, Ukrainian, French, English, Polish, German, Hungarian and Czech! Tim noted VOA broadcasting to W. Africa on 15-410 via Greenville, E. USA in English from 1600 until 2200. **Daniel Masterson** (Stoke-on-Trent) heard WYFR via Okkechobee, Florida USA on 15-440, they beam to Europe from 1600 until 1845.

The DX programme at 2130 from VOA, Radio HCJB in Quito, Ecuador on 15-20 is a favourite of Tim Shirley.

Exciting news comes from **Donald Wood** (Kingston-upon-Thames). He picked up Radio New Zealand on 15-150 using a new Sony ICF 2001D receiver at 1845. His reception has been confirmed with a QSL card and a long letter from their manager Rudi Hill. Congratulations Donald.

## The 11, 9, 7, and 6MHz Bands

Conditions on the 11MHz (25m) band have been fairly good. Radio New Zealand has been absent on 11-780, despite DXers looking for their signal.

### ADVERTISEMENT

## ARE YOU TAKING THE RAE?

THEN YOU MUST OBTAIN THE NEWLY PUBLISHED 3rd EDITION

## RADIO AMATEURS' QUESTION + ANSWER REFERENCE MANUAL

by R.E.G. Petri, T.Eng (CEI)  
M.I.ELEC.I.E. G8CCJ

ISBN 0 9509335 2X

Size A5 (210 × 148mm)

Containing over 340 pages, 20 sections of questions with multiple choice answers based on the C&G Radio Amateurs Examination syllabus (Approx. 1100 questions overall).

Other sections include the C&G syllabus, some useful computer programs & two new sections, circuit recognition and worked examples on the scientific calculator.

With diagrams and photographs.

Available from:

**W.P. PUBLICATIONS**

**11 Wayville Road,**

**Dartford, Kent DA1 1RL.**

**Price £6.95 + £1 p&p UK.**

**by return post**



Using a Grundig 1400SL receiver, **Simon Hamer** (New Radnor) has been hearing KYOI in Siapan, N. Mariana Islands on 11-900 at 1200 broadcasting to Asia. **John Sadler** (Bishops Stortford) listens to an interesting DX programme on Tuesdays at 1515 by Radio Budapest on 11-910. At 1600 he picked up Moyabi, Gabon relaying programmes in English from FRI in Paris to N. Africa on 11-705. Two more relay stations were mentioned by **Colin Diffell** (Corsham)—the BBC Ascension Island relay on 11-820, broadcasting the World Service to Africa at 1832 and RHC Habana, Cuba relaying Radio Moscow's World Service to N. America on 11-840 at 1857. Using a Sony ICF2001D receiver plus AN-1 antenna he heard a broadcast to S.W. Europe in Arabic, Spanish and French from RHC Habana, Cuba on 11-950 at 1918. Their programmes in English are on 11-795 at 1830.

Radio Kuwait, which is not often reported, was logged by **Darren Taplin** (Tun-

bridge Wells) at SINPO 55544 on 11-675 at 2029. He uses a Realistic DX-150A receiver plus 25m wire antenna and hears Radio RSA in Johannesburg on 11-900 from 2100 until 2156. It is advisable to tune above 12MHz, he logged Radio Cairo, Egypt on 12-050 broadcasting in Arabic at 2000.

Many 9MHz (31m) band reporters mention the bird call, station announcement and time signal followed by the world news and weather report from Radio New Zealand on 9-600 from 0858! **Jim Willett** (Grimsby) says he didn't expect to hear them, but was delighted to get positive identification at 0900 and log them at SIO 222 with his Yaesu FRG-7 receiver. **David Edwardson** (Wallsend) and his Trio R600 receiver heard them on three mornings at SIO 33. No doubt his 5m high inverted "V" 22m trap dipole antenna helped. **Alan Jarvis** (Cardiff) has also heard them several times, but their signal is so weak that if he had not known where to look he would have missed it! **Stewart Russell**

(Forfar) has been getting good reception from Radio Australia on 9-655 broadcast to Europe from 0700 until 1030. Using a Vega receiver, **John Court** (Birmingham) has been listening at 0300 to TWR, Bonaire, Netherlands Antilles on 9-535.

Stewart Russell also heard Radio Australia on 7-205 (heard from 1530 until 2040). **John Parry** (Northwich) heard AIR New Delhi, India on 7-412 at 1530. **Roy Degg** (Stoke-on-Trent) heard broadcasts in English from Radio Polonia on 7-125 at 2230. The 6MHz (49m) broadcasts to Europe from Radio Australia commence at 1530 on 6-035—**Kari Nieminen** logged them in Turku, Finland as SIO 544.

As for the 5, 4, 3 and 2MHz bands, the chart is evidence enough.

## Station Addresses

Radio Bucharest, P.O. Box 111, Bucharest, Romania. TWR Bonaire, P.O. Box 37, Bonaire, Netherlands Antilles. Vatican Radio, 00120 Citta del Vaticano, Vatican State.

# SWAP SPOT

Have v.h.f./u.h.f. scanner. Would exchange for a good pair of walkie-talkies, 4 watts or more. Carry type or hand held with rubber antenna. Tel: 0325 485981. C382

Have antenna rotator, 240V mains operated. Unused in box. Would exchange for a good pair of walkie talkies, 4 watts+. Tel: 0325 485981. C382a

Have Yaesu FT-707 (100W). Yaesu FC-707 a.t.u., FV-707DM (22A p.s.u.), no antennas. Would exchange for 144MHz f.m. l.c.d. rig, mobile or TR2500/2600 with accessories. Also interested in add-ons for Spectrum. Syd. Tel: Bursledon 4333. Must be collected. C384

Have C12S (h.f. transceiver ex-WD). Would exchange for 18 set or Mk 1 28 set or HW7/8. Tel: Medway 253056. C388

Have Newbrain Ad/Display computer, p.s.u., all leads, 5 business tapes, 4 manuals, circuits, club magazines, as used for machine control. Value £100+. Would exchange for portable or mobile 430MHz TX/RX. Cash adjustment as required. Allen. Tel: 0327 703964 (daytime). C402

Have Honda motorcycle CM 125C "B" reg in v.g.c. with panniers only 1000 miles, owing to ill health. Would exchange for 430MHz basestation, Icom or Yaesu preferred. Buyer collects. John G8ZZD. Tel: 0209 716411. C406

Have 934MHz Cybernet Delta 1, PA7E colinear antenna, P7ME mobile antenna, Cresibel AP104/AMP, SSE S-unit meter and 15m H100 cable. All new in May '86. Would exchange for general coverage receiver, Yaesu, Trio etc. Tel: Lowestoft 86594. C408

Have Diawa Search 9 receiver in v.g.c. Would exchange for top band transceiver, anything considered but must have a.m. and c.w. at least.

Also wanted, Kenwood T-599S h.f. TX. Peter G1TXI. QTHR. Tel: 0603 748338. C410

Have Spectrum 128 computer. Would exchange for FRG-7 or similar. W.h.y? Ross, 9 Brandywells, Kingsnympton, Umberleigh, Devon EX37 9SP. C414

Have PAG terminal unit, Creed 44 or computer use. Would exchange for Burndept BE600, Pye PFX or 85 or w.h.y? G1DRR. Tel: 0302 835280. C427

Have 1920s crystal set, working with original cats whisker and Brown "A" period headphones, worth £100. Would exchange for small computer. G4FFO. Tel: Cambridge 860150. C429

Have Yaesu FRG-7, full cover RX, all mode. S/h value £100. Would exchange for 934MHz pre-amp, prefer "Crestbyte" in same excellent condition as RX (or Nevada in-line pre-amp). Mast head might be considered. Jim. Tel: Grimsby 51800. C453

Have Drae Morse tutor, as new. Would exchange for suitable a.t.u. unit for 100W or parts to make same, w.h.y? Tel: Redruth 213542. C456

Have Eumig S912GL Super 8mm sound projector, would exchange for audio multifilter or any RX radio gear, w.h.y? Mr B. Porter, 25 Bourtonville, Buckingham, Bucks MK18 1AY. Tel: Buckingham 814961. C459

Have WW-II wireless gear including 6V NAFFI set, WS19 spares, ops room type headgear etc. Also have electrolytics 1000/25V, 470/35V, 100/10V, 22/25V, 1/50V, transistors 2SK30A, i.c. HN462732. Would exchange for WW-II wireless. Tony. Tel: 0908 73114. C466


## ADVERTISEMENT

VALVES		Prices correct as at 12/01/1987 but may fluctuate. 15% VAT incl.	
*High Quality **Very High Quality			
A1065	1.00 EF89	0.90 EF89	1.10 UB89
A2293	7.00 EC52	0.65 EF89	1.60 EY81
A2900	12.75 EC31	4.00 EF91	1.60 EY86-87
AR6	1.15 EC32	1.85 EF92	2.15 EY88
ARP3	1.15 EC381	0.95 EF95	0.95 EY89
ARP35	0.70 EC382	0.95 EF96	0.60 EY81
ATP4	0.90 EC383	0.75 EF183	0.75 G44
B12H	0.90 EC384	0.80 EF184	0.75 GY501
CY31	1.00 EC385	0.75 EF182	0.75 G232
DAF70	0.75 EC388	0.80 EF1200	1.85 G233
DAF96	0.75 EC389	0.85 EF90	0.85 G234
DE172	32.00 EC394	0.65 EF132	0.65 G234*
DF52	0.65 EF80	0.95 EL34	2.10 G237
DF96	0.70 EF82	0.95 EL34*	4.55 KT66*
DH76	0.75 EF801	0.75 EL82	0.70 KT77**
DL52	11.00 EF842	1.20 EL84	1.70 P188
DY86/87	0.65 EC381	0.70 EL86	0.95 KT88*
DY802	0.70 EC384	0.80 EL90	1.75 M4
EP9CC	2.00 EC390	0.65 EL91	3.20 M6
ET80CC	11.50 EC392	0.75 EL92	29.50 P1802/20A
ET148	0.50 EC395	0.75 EL504	2.70 N78
EA76	1.00 EC396	0.90 EL509	5.85 OA2
EB34	8.70 EF22	3.50 EL519	7.70 OB2
EB91	0.60 EF37A	2.15 EL822	0.95 SP41
EC33	1.05 EC381	1.10 EL822	0.95 PCL82
EC390	0.90 EF80	0.65 ELL80SE	4.50 PCL86
EC391	0.90 EF81	0.80 EM80	0.80 PCL86/95
EF890	0.95 EF81	0.95 EM87	2.50 P0900/510
			4.20 UB890
			0.70 UB89
			0.75 PCL200
			2.80 UCC84
			0.60 PL36
			0.85 PL81
			0.70 PL82
			0.70 PL83
			0.80 PL84
			1.30 PL84
			1.15 PL84
			2.00 UF80
			5.65 UF85
			5.05 UL84
			3.45 UM80
			0.70 UM84
			0.75 UY82
			0.75 UY85
			1.40 V88
			2.10 VR150/30
			5.95 X81M
			7.50 X86
			1.80 X86
			27.50 Z749
			28.50 Z758
			49.50 Z800U
			3.75 Z801U
			10.50 Z803U
			2.45 Z807
			37.50 IAC3
			0.75 IAC4
			0.75 IAC5
			0.75 IAC6

VALVES AND TRANSISTORS Telephone enquiries for valves, transistors, etc. Retail 749 3934, trade and export 743 0899. POSTAGE: E1-E3 55p; E3-E5 65p; E5-E10 85p; E10-E15 E1.05; E15-E20 E1.60. Minimum order E1.00. Delivery by return.

**COLOMOR (ELECTRONICS LTD.)** 170 Goldhawk Rd, London W12  
Tel: 01-743 0899 or 01-749 3934. Open Monday to Friday 9 a.m.-5.30 p.m.

## ADVERTISEMENT

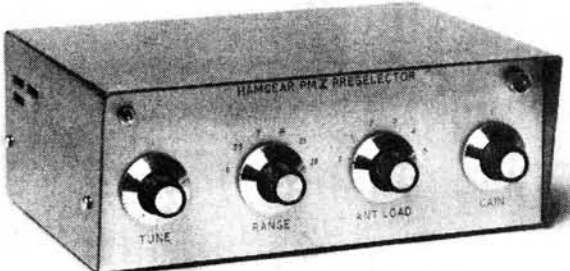

Introducing our new HF band preselector and antenna tuning unit combined, covering 1.7 to 34 mhz completely.

Why not send for full details?

**HAMGEAR ELECTRONICS**  
125 Wroxham Road, Norwich NR7 8AD. Tel: Norwich (0603) 405611.



# SMALL ADS

The prepaid rate for classified advertisements is 40 pence per word (minimum 12 words), box number 60p extra. Semi-display setting £13.24 per single column centimetre (minimum 2.5 cm). Please add 15% VAT to total. All cheques, postal orders etc., to be made payable to Practical Wireless. Treasury notes should always be sent registered post. Advertisements, together with remittance should be sent to the Classified Advertisement Dept., Practical Wireless, Enefoo House, The Quay, Poole, Dorset BH15 1PP. Telephone (0202) 678558.

*Whilst prices of goods shown in advertisements are correct at the time of closing for press, readers are advised to check with the advertiser both prices and availability of goods before ordering from non-current issues of the magazine.*

## Receivers and Components

**SAVE WITH THEASBY ELECTRONICS.** Crystal Calibrator. Audio filter now available as assembled and tested PCB's. SAE other SWL products. 31 Middleton, Cowling, Keighley, West Yorkshire BD22 0DQ.

**CRYSTALS** Made to order for any purpose and large stocks of standard frequencies for computers, modems, etc. Amateur CW (QRP) freqs. £4.00 and CB conversion crystals at £4.50. **PROGRAMMABLE OSCILLATORS (PXO)** for baud rates, MPU, and freq markers £12.50.

**FILTERS** Crystal, monolithic, mechanical and ceramic for all standard IFs. Special 10.695MHz for big improvement to most CB rigs at £4.50 each.

S.A.E. FOR LISTS. PRICES INCLUDE VAT AND POST

**P. R. GOLLEGE ELECTRONICS**  
G3EDW, Merriott, Somerset, TA16 5NS  
Tel. 0460 73718

**RADIO CANADA, Peking, Australia, Voice of America.** A Vega 242 (7x SW/MW/LW) pulls these and dozens more. £24.95. "Good buy" Practical Wireless. Year's guarantee. Return despatch. **CORRIGAN-RADIOWATCH**, Building 109, Prestwick Airport, KA9 2RT.

## MAXI - Q

COILS AND CHOKES  
PREVIOUSLY MADE BY DENCO

S.A.E. PRICE LIST  
8 BRUNEL UNITS, BRUNEL ROAD,  
GORSE LANE IND. ESTATE,  
CLACTON, ESSEX CO15 4LU.  
TEL: (0255) 424152

**ELECTRONIC COMPONENTS IN HOVE.** SCS COMPONENTS. 218 Portland Road. 0273 770191 (also Mail Order).

## YAESU OWNERS

ARE YOU GETTING ENOUGH?

160 METRE CONVERSION KIT for the FT77 & FT707 ..... £25.50  
A MOBILE RIG WITHOUT VOX! Now available VOX KIT for the FT77 ..... £8.25  
GENERAL PURPOSE V.F.O. KIT, RIT and FM mod facilities and the necessary diecast box (less capacitor & coil) ..... £9.75  
RESISTOR KITS, 610 resistors, 10 off, 10 Ohm - 1Meg 1/4 watt ..... £5.50  
KANGA PRODUCTS, 3 Limes Road, Folkestone CT19 4AU

**ATTENTION IRISH CONSTRUCTORS.** Save expensive Sterling draft and postal clearance charges. Postal components for Ireland planned. Send your anticipated component requirement details now. **WALSH**, 17 Owenabue Rise, Carrigaline, Cork.

## Software

**COMMODORE COMPUTERS** (+4, C16, 64, 128). "MICROCOM" cw/rty tx/rx with superb morse tutor. "TURBO LOG" ultimate high speed station log. "MICROCOM INTERFACE" ready built. S.A.E. to: Moray Micro Computing, Enzie Slackhead, Buckie, Moray, AB5 2BR. Tel. 0542 7384.

**SPECTRUM 48K.** 14 minutes of software (mostly machine code). "Beep" (musical organ, plays chords), logstore, 'sketcher', 'typefast' plus 2 games! £4 to I.R. SMITH, 24 Nethercraigs Drive, Paisley, Scotland PA2 8PB.

## SLOW SCAN T.V. 4SK SPECTRUM 12SK TRANSMIT SCREENS AND TEXT

Allows you to TX/RX text and graphics. Capture and re-transmit pictures. Store pictures, print pictures, save pictures to tape.

8 picture stores on 48K, many more on 12SK. Picture design programme allows you to design personal test card. CQ call and much, much more.

If you have a camera and digitiser, these may be used with the programme to send personal pictures.

Tone generator hardware allows maximum computer processing time for accurate, clean signals.

The Two programmes and very comprehensive instruction book, inc. P&P ..... £25.00

Ready built interface and tone generator ..... £42.75

As above with automatic PTT ..... £47.50

S.A.E. for detail of interface and tone generator kits.

**J.&P. ELECTRONICS LTD.**  
New Road Complex, New Road, Kidderminster DY10 1AL  
Tel: (0562) 753893

## Special Offers

**FREE MEMBERSHIP** to a new national electronics club. For details and a free pack of components worth over £10 send only £1 p&p to: **WOODSIDE**, Dowsett Lane, Ramsden Heath, Billericay, Essex CM11 1JL.

## Service Sheets

### TECHNICAL INFO SERVICES

76 Church St - Larkhall - Lanarks

FULL SIZE SERVICE SHEETS

Ctv/Mus-c/Combis £3.50 per set + Isae  
Any other published £2.50 + Isae

Complete TV Repair Course ..... £9.50  
Complete Radio Servicer/Repair ..... £9.50  
Practical Transistor Yearbook ..... £5.80

Repair data/circs most TVs and Video  
Mono TV or Videos £10.50: CTV £12.50

Almost every SERVICE MANUAL stocked  
Main supplier NEWNES TECHN BOOKS  
Sole supplier TV TECHN BOOKS  
S.a.e. for free Review and pricelists

### FOR FAST QUOTES

PHONE 0698 884585

After 5pm - 0698 883334

**SERVICE MANUALS**, Television, Audio, Video, Vintage, Test etc. LSAE enquiries: **MAURITRON (PW)**, 8 Cherry-tree Road, Chinnor, Oxfordshire, OX9 4QY

## Veteran & Vintage

**NOW AVAILABLE** - Bumper Catalogue - 170 pages - for collectors of vintage radio, audio & TV equipment. Price: £3.00 post paid U.K., £4.00 post paid overseas surface mail, £5.00 post paid airmail - printed matter. **VINTAGE WIRELESS CO. LTD.**, Cosham Street, Mangotsfield, Bristol BS17 3EN. Phone 0272 565472.

## Masts & Antennas

**ANTINTERFERENCE AERIALS.** Data 26p. SAE Aerial Guide £1. 03986 215. G2DYM, Uplowman, EX16 7PH

## ORDER FORM PLEASE WRITE IN BLOCK CAPITALS

Please insert the advertisement below in the next available issue of Practical Wireless for .....  
insertions. I enclose Cheque/P.O. for £ ..... CAT. heading .....  
(Cheques and Postal Orders should be made payable to Practical Wireless)


NAME .....

ADDRESS .....

### PRACTICAL WIRELESS

Classified Advertisement Department,  
Enefoo House, The Quay, Poole,  
Dorset BH15 1PP. Telephone (0202) 678558  
Rate 40p per word, minimum 12 words.  
Box No. 60p extra.  
PLEASE ADD 15% VAT TO TOTAL

Company registered in England. Registered No. 1980539. Registered Office: Towngate House, 2 Parkstone Road, Poole, Dorset, BH15 2PJ.

4/87

## Books and Publications

**DIAL-SEARCH:** ideal gift for the home listener. 46 page book clearly listing broadcasting stations Europe & U.K. with 2 maps. 4th edition £3.30 includes postage (abroad £3.50 or 15 IRCs). — **GEORGE WILCOX (PW3)**, 9 Thurrock Close, Eastbourne BN20 9NF.

**VHF/UHF FREQUENCY LIST** 28 to 1300 MHz £3.00 inc p&p. **DAVINA SYSTEMS**, 51 Glyne Street, Farnworth, Bolton, Lancs.

## For Sale

**SELINA-216**, (8 band AM/FM) £36.00. **Vega-205** (8 band) £21.00. Russian-multiband radios, new — guaranteed. (0462 33690).

**GRUNDIG** infra-red remote control VIF/K1 consist transmitter TPV355 and receiver VIF-E1 brand new £5. P&P £2. Video tapes (V2000) brand new VCC360 £6.99, post 45p. **STAN WILLETT'S** 37 High Street, West Bromwich, West Midlands. 021-553 0186.

## Miscellaneous

**QSL CARDS**. — Gloss or tinted cards. SAE for samples to: **TWROG PRESS**, Dept PW, Penybont, Gillyllydan, Blaenau Ffestiniog, Gwynedd.

**G2VF D.L.V. H.F.** Long and Medium Wave loop antennas. S.A.E. for details: **F. RYLANDS**, 39 Parkside Avenue, Millbrook, Southampton.

**HAVE YOU GOT YOUR COPY** of the Tiger Antenna Newsletter yet? If not send 50p postage to: **ANT PRO-DUCTS**, Foundry Works, Old Greatnorth Road, Ferrybridge, West Yorks WF11 8NN.

### MORSE CODE PREPARATION

Cassette A: 1-12 wpm for amateur.  
Cassette B: 12-25 wpm for professional examination preparation.  
Each cassette is type C90.  
Price of each cassette (including booklets) £3.95.  
Morse key with separate battery (PP3) — driven solid-state oscillator and sound transducer produces clear tone for sending practice. Price of key with electronic unit £8.95.  
Price includes postage etc. Europe only.  
**MH ELECTRONICS (Dept PW)**  
12 Longshore Way, Milton, Portsmouth PO4 8LS

**CASES 19"** rack and free standing from £12.00. **NEWRAD** Wick Ind. Est., New Milton, Hants. Tel. 621195.

## Miscellaneous (Cont.)

**Racal** 100kHz xtal standard and oven, ex-equipment £7 + £2/p.p. Aircraft instrument 35mm camera, contains precision mirror, lens, small 24v motor, etc. £12 + £3 p.p. 24v Ni-Cad battery contains 20 x 0.4A/H cells, new in box, £8 + £2.50/p.p. 24v Ni-Cad battery contains 20 x D type cells, used condition, £10 + £3/p.p. Ex-govt. type A14 A.T.U. tunes 2 to 8 MHz into 8 or 16ft. whips, new in box, £16 + £3/p.p. Pye Pocket-phone U.H.F. receiver type PF1, used and untested £4.50 + 70p p.p. Ex-govt. radio set type A40 complete station £27 + £4/p.p. Radio set type A41 complete station less battery box £27 + £4/p.p. Radio set type 88 complete station £25 + £4/p.p. Radio set type 38 Mk.3 (set only) £25 + £4/p.p. Ex-govt. small morse signal lamp £5 + £2/p.p. 500v wind handle type insulation tester £25 + £2/p.p. Wayne Kerr pulse generator type CT500 freq., pulse, width, delay and amplitude control, 240v mains, complete in transit case £17 + £3/p.p. Pye Westminster low-band AM radiotelephone £25 + £3/p.p. Pye Motorphone low-band AM radiotelephone £30 + £3/p.p. Large quantity of diesel and petrol generators, phone for details. Many items of ex-govt. equipment, instruments and components in stock. Callers by appointment.

**A. C. ELECTRONIC SERVICES**  
17 Appleton Grove, Leeds LS9 9EN  
Tel: 0532 496048

**HEATHKIT U.K.** Spares and Service Centre. **CEDAR ELECTRONICS**, Unit 12 Station Drive, Bredon, Tewkesbury, Glos. Tel. (0684) 73127.

**WAVEGUIDE, FLANGES & DISHES**. All standard sizes & alloys (new material only) from stock. Special sizes to order. Call: **EARTH STATION** 01-228 7876, 22 Howie Street, London SW11 4AR.

## Educational

**COURSE FOR CITY & GUILDS**, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RRC Home Study Course. For details of this and other courses (GCE, Career and professional examinations, etc.) write or phone: **THE RAPID RESULTS COLLEGE**, Dept JX19, Tuition House, London, SW19 4DS. Tel. 01-947 7272 (9am-5pm) or use our 24hr Recordcall Service: 01-946 1102 quoting Dept. JX19.

## ★ BAKER ★

### GROUP P.A. DISCO

**AMPLIFIERS** post £2  
150 watt Output, 4 input Mixer pre-amp. Illustrated £99  
150 watt Output, Slave 500 mv. Input 3 Speaker Outputs £80  
500 watt Heavy duty mono slave amplifier £275  
150 watt P.A. Vocal, 8 inputs. High/Low Mixer Echo Socket £89  
60 watt Mobile 240v AC and 12v DC. 4-8-16 ohm + 100v line £85  
Compact PA amp 20-20 Stereo or 40 watts Mono £59  
30 watt Guitar/PA Amplifier, 2 inputs, Treble, Bass etc. £95 PP £5.

### FAMOUS LOUSPEAKERS

**FULLY GUARANTEED**

Make	Model	Size	Watts	Ohms	Price	Post
GOODMANS	HIFAX	7 1/2 x 4 1/4 in	100	8	£34	£2
GOODMANS	HB WOOFER	8 in	50	8	£16	£1
BAKER	DISCO/GROUP	10 in	50	8/16	£20	£2
BAKER	MID RANGE	10 in	100	8	£27.50	£2
BAKER	DISCO/GROUP	12 in	75	4/8/16	£22	£2
BAKER	DISCO/GROUP	12 in	120	8/16	£32	£2
GOODMANS	DISCO/GROUP	12 in	120	8/15	£36	£2
WEM	DISCO/GROUP	12 in	300	8	£49	£2
H+H	DISCO/GROUP	15 in	100	4/8/16	£54	£4
GOODMANS	HP/BASS	15 in	250	8	£74	£4
GOODMANS	HPD/BASS	18 in	230	8	£87	£4

**LOUSPEAKERS REPLACEMENT TYPE STATE IMP REQUIRED.**  
2 in. 3 in. 5 in. 6 x 4 in. 7 x 4 in. £2.50. 6 1/2 in. 8 x 5 in. £4. 8 in. £5. 10 in. £7.50 PP £1

**MAINS TRANSFORMERS** Price Post  
250-0-250V 80mA. 6.3V 3A. 0.5. 6V 2A. £10.00 £2  
350-0-350V 250mA. 6.3V 6A. CT £16.00 £2  
220V 25mA. 6V 1 Amp £3.00 220V 45mA. 6V 2 Amp £4.00 £1

**LOW VOLTAGE TAPPED OUTPUTS AVAILABLE**  
1 amp 6, 8, 10, 12, 16, 18, 20, 24, 30, 36, 40, 48, 60 £6.00 £2  
ditto 2 amp £12.50 £2

**Auto Wound 120V/240V 150W £9. 250W £12. 500W £15. Post £2**  
**LOW VOLTAGE MAINS TRANSFORMERS £5.50** each post paid.  
9V. 3A. 12V. 3A. 16V. 2A. 20V. 1A. 30V. 1/2A. 30V. 5A + 17-0-17V. 2A. 35V. 2A. 20-40-60V. 1A. 12-0-12V. 2A. 20-0-20V. 1A.

**PANEL METERS** 50µA. 100µA. 500µA. 1mA. 5mA. 10mA. 100mA. 500mA. 1 amp. 2 amp. 5 amp. 25 volt. VU 2 1/2 x 2 1/2 in. £5.50 post 50p  
**MINI MULTI TESTER** Volts AC/DC, ohms, millamps £3.50  
**DELUXE RANGE DOUBLER METER** 50k O.P.V. £25.00 PP £1

**PROJECT CASES**. Black Vinyl Covered Steel Top, All Base  
4 x 2 1/2 x 2 1/4 in. £3.00. 6 x 4 x 1 1/2 in. £4.00. 8 x 5 x 2 in. £4.50.  
11 x 6 x 3 in. £6.00. 11 1/4 x 6 x 3 in. £10.00. 15 x 8 x 4 in. £13.50.  
**ALUMINIUM PANELS** 18 s.w.g. 12 x 12 in. £2.00. 14 x 9 in. £2.00.  
6 x 4 in. 65p. 12 x 8 in. £1.50. 10 x 7 in. £1.10. 8 x 6 in. £1.00.  
14 x 3 in. 85p. 12 x 5 in. £1.00. 16 x 10 in. £2.35. 16 x 6 in. £1.50.

**ALUMINIUM BOXES**. PLEASE ADD EXTRA POSTAGE  
4 x 2 1/2 x 2 in. £1.35. 3 x 2 x 1 in. £1.15. 6 x 4 x 2 in. £2.20. 8 x 6 x 3  
£3.40. 12 x 5 x 3 in. £4.00. 6 x 4 x 3 in. £2.50. 10 x 7 x 3 in. £4.00.

**HIGH VOLTAGE ELECTROLYTICS** Many others in stock.  
20/500V 75p 470MF 400V £3 20/20350V 75p  
32/350V 50p 680MF 350V £3 32/32500V £2  
47/350V 75p 2200MF 400V £5 32/32350V 85p  
220/400V £2 8+8MF 450V £1 80+40+20/350V 95p

**LOW VOLTAGE ELECTROLYTICS**.  
470MF 63V 40p. 1000MF 40V 50p. 100V £1.20. 1200MF 76V £1.  
1500MF 63V 80p. 100V £1.20. 2000MF 63V £1.50. 100V £1.80.  
2500MF 50V 70p. 3300MF 63V £2. 4700MF 63V £3. 6800MF 100V  
£5.50

**AIR-SPACED GEARED TWIN GANGS** 365 + 365 + 25 + 25p £2.00.  
**VERNIER DIALS**. 0-100. 36mm. £3.00. 50mm. £3.50.  
**MORSE CODE TAPPER & BUZZER** Practice Set £3.00.

### RADIO COMPONENT SPECIALISTS

337 WHITEHORSE ROAD, CROYDON  
ACCESS SURREY, U.K. Tel: 01-684 1665 VISA  
Post 55p Minimum. Callers Welcome. Delivery 7 days. Closed Wednesday  
List, Large S.A.E.



## Thanet Electronics/Retail.

Everything you need for your shack is available from Thanet Electronics' retail shop. Andy G6MRI is on hand with new and secondhand stock from ICOM plus Yaesu, Trio, MET, Tono, Jaybeam, Welz, Drae, BNOS and many more. RSGB publications also available, if Andy can't help, you've got a problem. Why not call in, we are on the corner of Stanley Road and Kings Road, Herne Bay, Kent and open 9 - 5.30 mon-sat, lunch is 1-2.15, 1/2-day closing thursday afternoons open 9-1.00. BCNU.

Credit facilities available, plus VISA & ACCESS accepted.

**ICOM** The World System  
**Thanet Electronics Ltd.**  
2 Stanley Road, Herne Bay, Kent CT6 6SH. Tel: 0227 369464.

## PRACTICAL WIRELESS KITS

			COMPONENTS
PW WOODSTOCK SHORTWAVE CONVERTER	Mar '87	£25.50	BC214L .12
MATHEAD PREAMP (144MHz)	Feb '87	£27.50	BF199 .12
PW WESTBURY BASIC WOBBLATOR	Jan '87	£16.50	BF224 .35
HIGH IMPEDANCE MOSFET VOLTMETER	Dec '86	£23.90	BF244 .35
P.W. TAW-VLF CONVERTER	Nov '86	£13.20	BF256 .44
ACTIVE ANTENNA	Nov '86	£17.80	BF268L .44
AUTOMATIC NICAD CHARGER Upated Version (see Feb '87)			BF961 .75
AUTOMATIC NICAD CHARGER	Oct '86	£17.45 + £1.50 P&P	BF930 .88
SIMPLE 50MHz CONVERTER	Sept '86	£21.50	J309 .72
P.W. ARUN-PARAMETRIC FILTER - inc. case	May '86	£48.00 + £2 p&p	J310 .72
P.W. ARUN-PARAMETRIC FILTER - exc. case	May '86	£34.00 + £1 p&p	VN10LM .75
MEON 2 - 50MHz TRANSVERTER - 144 MHz I.F.	April '86	£42.50 + £1.50 p&p	2N3702 .14
RTTY/MORSE MODEM - no case	Jan '86	£21.85	2N3704 .14
CRYSTAL CALIBRATOR	Jan '86	£17.95	2N3819 .42
TWO TONE OSCILLATOR	Dec '85	£20.30	2N3904 .14
MEON - 50MHz TRANSVERTER - 28MHz I.F.	Oct '85	£42.50 + £1.50 p&p	2N3906 .14
OP OSCILLATOR	Oct '85	£19.90	555 .22
CAPACITANCE METER	Oct '85	£21.30	741 .20
U.H.F. PRESCALER	Sept '85	£21.90	LM751 .46
ADD ON B.F.O. - inc. CB04 + optional comps.	Aug '85	£12.95	LM566 .12
LOW COST CRYSTAL TESTER	July '85	£13.90	SO42P .22
BATTERY CHARGER CONTROLLER	June '85	£9.50	SL1621 .03
TRIANGULAR KEY	Feb '85	£16.45	SL1640 .03
BUG KEY WITH 528 BIT MEMORY	Oct '84	£46.50	SL6400 .48
MORSE SENDING TRAINER	July '84	£12.00	1L072 .15
AUTO NOTCH FILTER	July '84	£23.80	TU074 .15
			TU084 .10
			78L09 .50
			7824 .42
			XR2206 .48
			XR2211 .36
			SB1 .55
COIL FORMERS + CORES (Simple 50MHz Converter)	Sept. '86	£2.70 per set	

PLEASE ADD P&P AND 15% V.A.T. TO TOTAL ORDERS. TELEPHONE ORDERS ACCEPTED.  
P&P 70p unless specified. Article Reprints 50p (if required). All kits complete (less batteries).  
(unless otherwise specified), including PCB (or stripboard), case, all components and hardware. Cheque or P.O. to: C.P.I. ELECTRONICS, 8 Southdown Close, Hemmington, Middlesbrough, Cleveland TS8 9HE. Tel. 0662 581157. Other kits available plus a wide range of components, test gear, hardware, etc. Free price list available on request. Goods normally dispatched within 14 days.

## MAKE YOUR INTERESTS PAY!

More than 8 million students throughout the world have found it worth their while! An ICS home-study course can help you get a better job, make more money and have more fun out of life! ICS has over 90 years experience in home-study courses and is the largest correspondence school in the world. You learn at your own pace, when and where you want under the guidance of expert 'personal' tutors. Find out how we can help YOU. Post or phone today for your FREE INFORMATION PACK on the course of your choice. (Tick one box only!)

Electronics	<input type="checkbox"/>	Radio, Audio and TV Servicing	<input type="checkbox"/>
Basic Electronic Engineering (City & Guilds)	<input type="checkbox"/>	Radio Amateur Licence Exam (City & Guilds)	<input type="checkbox"/>
Electrical Engineering	<input type="checkbox"/>	Car Mechanics	<input type="checkbox"/>
Electrical Contracting/Installation	<input type="checkbox"/>	Computer Programming	<input type="checkbox"/>
GCE over 40 'O' and 'A' level subjects			

**ICS**

Name \_\_\_\_\_ P. Code \_\_\_\_\_  
Address \_\_\_\_\_  
International Correspondence Schools Dept EES 47, 312/314 High St., Sutton, Surrey SM1 1PR. Tel: 01-643 9568 or 041-221 2926 (24hrs).



# YOUR LOCAL DEALERS

## STOKE ON TRENT

### MRZ COMMUNICATIONS LTD

ICOM - Amateur/PMR/Marine/Air.  
YAESU - Amateur MRZ Desk PSU  
for ICOM/YAESU Portables.  
UK and EXPORT  
Tel: (0782) 619658

## IRELAND

### Radcom Electronics

Approved dealer for Icom,  
Yaesu and most accessories

25 Riversfield  
Midleton, Co. Cork,  
Ireland  
Tel: 021 632725/632804

## WORCESTERSHIRE

### A. Kelly Electronics and Communications Equipment

RSGB Publications, Mutek, DRAE,  
Microwave Modules, Starmaster Keys,  
TAL Aerials, ALINCO. We buy and sell  
second hand equipment.

3 Stoke Road, Aston Fields,  
Bromsgrove, Worcs. B60 3EQ.  
Tel: 0527 71165  
(Open 6 days a week, evenings by Appointment)

## ESSEX

### Selectronic

The UK's leading suppliers of  
934MHz personal radio  
equipment

203 High Street, Canvey  
Island, Essex  
Tel: 0268 691481  
(Open Mon-Sat 9-5.30)  
Amateur radio equipment also in stock

## HERNE BAY

### Thanet Electronics

The Official Icom importer

2 Stanley Road  
Herne Bay, Kent  
CT6 5SH

Tel: 0227 369464

(Open Mon-Sat 9-5.30,  
except Thurs 9-1)

## SOUTHAMPTON

### South Midlands Communications

Official Yaesu Importer

S.M. House, School Close,  
Chandlers Ford Industrial Estate,  
Eastleigh Hants SO5 3BY.  
Tel: 04215 55111

## PORTSMOUTH

### Telecomms

Importers of the Nevada  
range of 934MHz equipment

189, London Road,  
North End, Portsmouth,  
Hants, PO2 9AE  
Tel: 0705 662145

## DEVON

### Reg. Ward & Co. Ltd.

The South-West's largest amateur  
radio stockist. Approved dealer for  
Trio, Yaesu and Icom

1 Western Parade,  
West Street, Axminster,  
Devon, EX13 5NY  
Tel: 0297 34918  
(Closed 1:00-2:00 and all day Monday)

## BUCKINGHAMSHIRE

### Photo-Acoustics Ltd.

Approved Trio, Yaesu and  
Icom dealer (part exchange  
always welcome)

58 High Street, Newport Pagnell,  
Buckinghamshire MK16 8AQ  
Tel: 0908 610625

(Mon-Fri 9.30-5.30, Sat 9.30-4.30)

## TYNE & WEAR

### ESR Electronic Components

Official North East dealer for

VELLEMAN KIT  
Station Road, Cullercoats  
North Shields,  
Tyne & Wear NE30 4PQ  
Tel: 091 251 4363

(Mon-Sat 9.30-5.30. Closed Thurs)

## LONDON

### AMCOMM/ARE

Approved dealer for Yaesu  
and Icom

373 Uxbridge Road,  
London W3 9RN  
Tel: 01-992 5765

(Mail order a speciality)

## DERBYSHIRE

### Lowe Electronics

The official importer of the  
TRIO range of equipment (See  
main ad. for the full list of all  
our shops)

Chesterfield Road, Matlock,  
Derbyshire, DE4 5LE  
Tel: 0629 2817/2430/4057

## LONDON

### Henry's

27MHz/934MHz Rigs &  
accessories in stock.  
Lists - S.A.E. (A4) - 26p

Full catalogue (TG/P) -  
large S.A.E. £1.00

404 Edgware Road,  
London W2 1ED  
Tel: 01-724 0323

(Open 6 days a week)

## INDEX TO ADVERTISERS

A.C. Electronic Services	71	Cricklewood Electronics	10	J & P Electronics Ltd.	70	Radio Shack Ltd.	72
A.H. Supplies	10	C.P.L. Electronics	71	Kanga Products	70	Random Electronics	67
A.R.E. Communications	31	Dalong Electronics	10	Lowe Electronics	2, 3, 8	RST Valve	13
Aerial Techniques	63	Dewsbury Electronics	9	Maplin Electronic Supplies	Cover 4	S.E.M.	63
A.K.D.	31	Dressler	7	Maxi-Q	70	South Midlands Communications	4, 5, 6
Allweld Engineering	13	Elliott Electronics	12	MH Electronics	71	Spectrum Communications	6
Amcomm ARE	14, 15	Garex	12	Microwave Modules	13	Stephens James	67
Birkett, J.	8	Golledge, P.R. Electronics	70	R.A.S. Nottingham	12	Technical Info Services	70
Blackstar Ltd.	12	Hamgear Electronics	69	Radio Component Specialists	71	Technical Software	10
B.N.O.S.	11	Howes, C.M. Communications	8			Telecomms	Cover 3
Bredhurst Electronics	6	I.C.S. Intertext	71			Ward, Reg & Co.	Cover 2
Bunacamp	63	ICOM/Thanet Electronics	36, 37, 71			Waters & Stanton	67
Cambridge Kits	63	Interbooks	8			Withers, R. Communications	22, 23
Colorator Electronics	69					W.P. Publications	68

## RADIO SHACK SAVES YOU MONEY ON SCANNERS!


THE FINEST EVER SCANNER AT AN UNBEATABLE PRICE  
25-520, 760-1300 MHz, 300 MEMORIES ALL FOR £329.95

This wonderful new scanner not only has all the facilities found on ordinary scanners, such as: scan, search, lockout, delay, priority, adjustable speed and direct entry keyboard but it also has these additional features:

Continuous tuning from 25 to 520 MHz and 760 to 1300 MHz 300 permanent memories in ten banks of 30 plus an additional ten channels used for temporary storage when in search mode. Switchable audio squelch allows you to ignore blank carriers. Three reception modes, AM, FM, (Wide) and FM (Narrow). Adjustable step size, 5kHz, 12.5 kHz and 50 kHz. Sensitivity (NFM) 0.5uV for 20dB S/N up to 1100 MHz Extremely attractive, information packed blue LCD display Headphone jack socket, tape recorder socket, external speaker socket, attenuator switch, 240 Volt operation and 13.8 VDC with optional mobile power lead.

PRO-2004 in stock now ..... £329.95  
Post and packaging ..... £3.45

Also still available  
BC-200FB 16 CHANNEL SCANNER

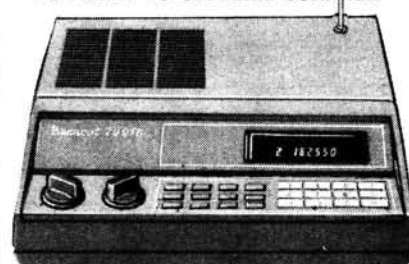

£199.95 NOW SAVE £40  
£159.95 (CP&P £3.45)



## RADIO SHACK LTD

(Just around the corner from West Hampstead Station on the Jubilee Line)

Giro Account No. 588 7151 Telephone: 01-624 7174 Telex: 23718

188 BROADHURST GARDENS,  
LONDON NW6 3AY





# NEVADA 934 MHz EQUIPMENT

Have you tried this exciting new band yet? Available for private or business use, by simply purchasing a £10 licence from any post office. Range is from 10 - 250 miles according to your location and WX conditions.

## DELTA 1 934 Mhz TRANSCEIVER



£365

THE DELTA 1 IS A STATE OF THE ART TRANSCEIVER AND NOW IN USE BY OVER 70% OF 934 Mhz ENTHUSIASTS!

FEATURES: ● Scan facility.  
● 16 channel memory/scan.  
● Sensitive RX.


### ACCESSORIES

P7M-E Mag Mount 7dB Antenna	£49.72
P714R-E GTR Mount 7dB Antenna	£49.72
PA7-E Base Colinear 7dB Antenna	£67.75
PA15 Base Colinear 11dB Antenna	£79
TC12L 12 Element Beam 18dB Antenna	£39
HRA 934L in line Pre-amp	£139.95
HRA 900 Masthead Pre-amp	£139.95

PLUS MANY MORE ITEMS  
Send £1 for our full 934 Mhz catalogue.

# NEVADA AMATEUR PRODUCTS

## HIGH POWER VARIABLE CAPACITORS



IDEAL FOR ATU'S OR AMPLIFIERS UP TO 3kW  
TC 500 26-500 pF £28 (£2 p.&p.)  
TC 250 13-250 pF £19.95 (£1 p.&p.)

## HIGH POWER "ROLLER COASTER" VARIABLE INDUCTOR

NEW £24 (£1 p.&p.)  
Suitable for 1 kW ATU  
Frequency: 1.8 - 30MHz  
IND. 26.5 uH  
SIZE 5 1/2 x 10 1/2 x 14 1/2 cm

SPECIAL OFFER  
TC250, TC500, & ROLLER COASTER, COMPLETE FOR £59 (£2 p.&p.)

# SCANNING RECEIVERS

£26

## C.T.E. DISCONE WIDEBAND ANTENNA

RECEIVE 70-700 MHz  
TRANSMIT 70-500MHz  
MAX POWER 500W  
GAIN 35dB

WIDEBAND DISCONE RECEIVING ANTENNA  
(3 Element) 70-500MHz

## NEW BEARCAT H/HELD SCANNING RX. MODEL 100XL

Receives 8 bands plus aircraft band 16 Channels, priority keyboard lock, and lighted display  
66-88 MHz, 118-174 MHz, 406-512 MHz,

£24.95




£229

## BEARCAT 175XL

Base receiver covers:-  
66-88MHz  
118-174MHz  
406-512MHz  
with 16 channel memory/scan

## BEARCAT DX1000 COMMUNICATIONS RECEIVER



Direct access communications 10KHz-30MHz with 10 channel micro-processor controlled memory

£379

# TEST EQUIPMENT

## ZETAGI DL150 RF DUMMY LOAD AND POWER METER

A very accurate unit for the service dept. or discerning enthusiast.  
FREQ:- 0.5MHz-500MHz  
POWER:- 150 Watt Max in 3 ranges 0-3, 0-15, 0-150W.

## ZETAGI 500 SWR AND POWER METER

For the enthusiast who wants the very best. A twin meter unit with push button control for either 75 OHM or 50 OHM cable.  
FREQ:- 3-200MHz  
POWER:- Up to 2kW

## FD 1350 1.3GHz FREQUENCY COUNTER

FREQ:- 10Hz-1.35GHz  
SENSITIVITY:- 43mV at 1GHz  
DISPLAY:- 8 Digit  
SUPPLY:- 9-12 Volt DC

£139.53



£85.19



£41.46



## NEW LOW PRICE 2 MTR HAND HELD

CT1600 Through bulk buying we can now offer this superbly sensitive handheld at an all time low price. Unit covers 2 Mtr Ham Band Plus 142-149 Mhz (For Export)

● Repeater Shift  
● Hi/Low power 1/2 - 1 1/2 Watts  
● Thumbwheel Freq. Selector  
Each set supplied C/W re-chargable battery pack and free mains charger unit.

£169

## VHF MOBILE AMPLIFIERS

MOD. B110  
144 MHz 110 Watt FM Plus Low Noise Pre-amplifier Switchable £169  
MOD. B42  
144 MHz 40 Watt FM Mobile AMP £64.66  
SEE OUR HAM CATALOGUE FOR FULL RANGE



# RF AMPLIFIERS

All amplifiers except broadband (2-30 MHz) models are tuned for 29.6 MHz centre freq. Should you require a lower freq. ie. 28.5 MHz please state when ordering. Export models available for 26-30 MHz.

## C.T.E. MOD 767

76 Watts FM (150W P.E.P.)  
INPUT:- 0.5-10 Watts  
SWITCHABLE:- Class AB, Class C  
SUPPLY:- 13.8 Volt  
REMOTE CONTROL FACILITY



£49.90

## MOBILE AMPLIFIERS

C.T.E. MOD. 737 50W FM (80W P.E.P.) £44.76  
C.T.E. MOD. 767 80W FM (150W P.E.P.) £49.90  
C.T.E. MOD. 757 150W FM (300W P.E.P.) (3-30MHz) £116.87  
ABOVE MODELS HAVE REMOTE CONTROL FACILITY PLUS CLASS AB & CLASS C SWITCHING. (NOT MOD. 737)  
ZETAGI B35 25W FM (26-30MHz) £23.72  
ZETAGI B150 70W FM (160W P.E.P.) £49.96  
ZETAGI B300 200W FM (400W P.E.P.) 2-30 MHz £136  
NEVADA TC35 DX 25W FM (W/LOW PASS FILTER) £23.99

## MAINS AMPLIFIER

ZETAGI B132 SOLID STATE (240W P.E.P.) 2-30 MHz... £119

# NEVADA

## HIGH QUALITY BRITISH MADE 29MHz FM PRODUCTS

## NEVADA TC35 DX

## RF POWER AMP WITH HARMONIC FILTER

INPUT:- 1-4 Watts  
OUTPUT:- 25-30 Watts  
SUPPLY:- 13.8V DC  
FREQ:- 26-30 MHz

Can be centred on 29.6 MHz or 28.5 MHz (state which). A new top quality amp, which now features harmonic filter to reduce harmonic O/P

## NEVADA TC27 RX

RECEIVER PRE-AMP FOR 26-30MHz

A superior low noise pre-amplifier for 29MHz FM operation. Variable gain -6dB's to +18dB's suitable for use with transceivers up to 25 Watts output.



£23.99

# TELECOMMS

HOTLINE (24 HOURS)  
0705 662145

189 LONDON ROAD, PORTSMOUTH, HANTS, PO2 9AE, TELEX 869107 TELCOM G



USE YOUR CREDIT CARD (AMERICAN EXPRESS ACCESS OR VISA) FOR IMMEDIATE DESPATCH

TRADE ENQUIRIES WELCOME.

WORLDWIDE DISTRIBUTORS OF AMATEUR & PERSONAL RADIO EQPT.



# IN METERS .... WE'RE MILES AHEAD

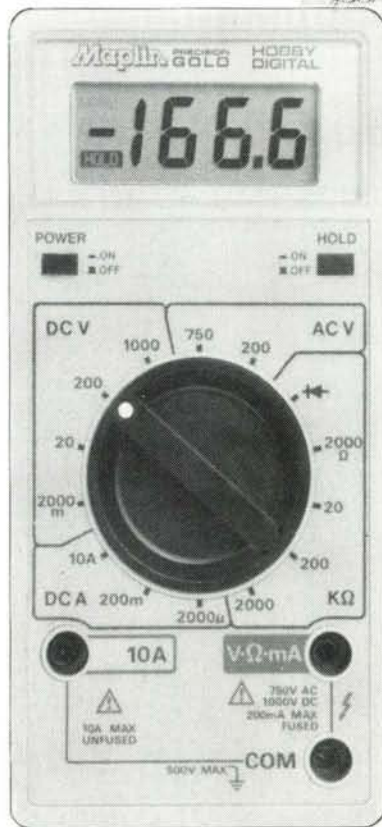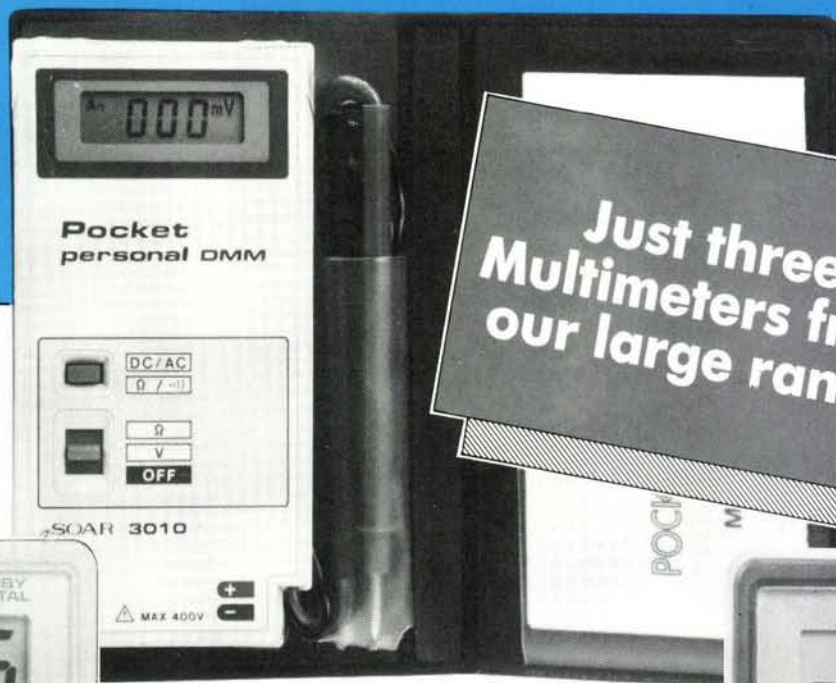

## ▲ Pocket Digital Multimeter

A calculator size autoranging DMM which reads 1mV-400V DC, 1mV-400V AC, 0.1Ω-2MΩ and has a continuity buzzer. Overall size only 120 x 75 x 15mm. Order Code YN78K **Price £24.95**

## ◀ Hobby Digital Multimeter

A very high quality multimeter at a very low price! 14 selectable ranges covering AC and DC volts, DC current and resistance. Also has a diode junction test range. Order Code YM63T **Price £28.95**

## ▶ Auto Ranging Digital Multimeter with Transistor Tester

A 6 position rotary switch selects off, volts, ohms/continuity, 20MΩ, 200mA/h<sub>FE</sub> or 10A. Features include display hold, NPN and PNP transistor tester, autorange override and low battery indication. Order Code YM64U **Price £45.95**

*All prices include VAT. Please add 50p towards postage. Prices firm until 9th May 1987. Subject to availability.*



## Maplin ELECTRONIC SUPPLIES LTD.

**Mail Order:** P.O. Box 3, Rayleigh, Essex SS6 8LR. Tel: Southend (0702) Sales: 554161, Enquiries: 552911; Trade sales: 554171, Trade enquiries: 552961.

### Shops

**Birmingham:** Lynton Square, Perry Barr. Telephone: 021 356 7292.

**London:** 159-161 King Street, Hammersmith W6. Telephone: 01 748 0926.

**Manchester:** 8 Oxford Road. Telephone: 061 236 0281.

**Southampton:** 46-48 Bevois Valley Road. Telephone: 0703 225831.

**Southend-on-Sea:** 282-284 London Road, Westcliff-on-Sea, Essex. Tel: 0702 554000.

*All shops except Manchester closed all day Monday.*



Pick up a copy of our 1987 catalogue from any branch of W.H. Smith for just £1.50. Or to receive your copy by post just send £1.50 + 40p p & p to Mail Order address. If you live outside the U.K. please send £2.50 or 11 International Reply Coupons.