

Radio-Electronics

\$1.00 ■ AUG. 1978

THE MAGAZINE FOR NEW IDEAS IN ELECTRONICS

New From Heath
TWO COMPUTER SYSTEMS
For The Hobbyist




TV MODULATOR
Feeds Video Signals
To Your TV's
Antenna Terminals

MAKE PICTURES TALK
How To Turn 8mm Silent
Home




DIGITAL CLOCK
Build 10-Function Unit
Includes Timer And Alarm
Simultaneous Display

ANTIQUE RADIOS
Get Started Restoring
And Repairing Today

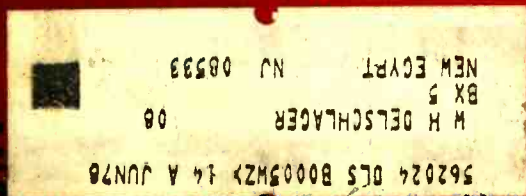

PLUS:
Anti-Collision Systems For Your Car ★ **Movie Sound Synchronization** ★
R-E Lab Tests Optonica ST-3535 Tuner & Hitachi SR-903 Receiver ★

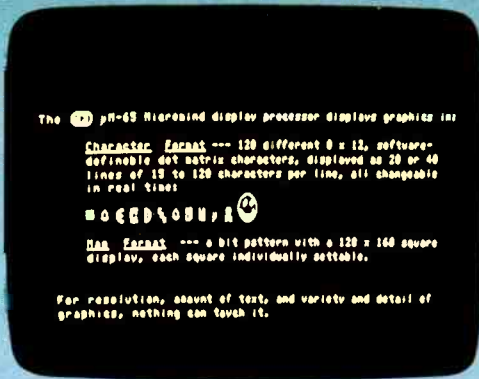

Key Into Maxi-Power @ Micro-Price

Micromind is an incredibly flexible complete and expandable, hardware/software, general purpose computer system. You won't outgrow it.

Hardware includes an 80 key, software-definable keyboard, I/O interface board, 6500A-series microprocessor (powerful enough for advanced computing), a high-detail graphics and character display processor, power supply, enclosure and connections for up to 4 tape recorders plus TV or monitor. An interconnect bus



permits 15 additional microprocessors, parallel processing and vastly increased computing power.

powerful assembler, a debugger, a file system, graphic routines, and peripheral handlers. We also include dynamic graphic games: Animated Spacewar and Life.

ECD's standard Micromind μM-65 supplies 8K bytes of memory. Additional

32K byte expansion boards and a mapping option give Micromind expandable access to 64 Megabytes. Utilizing software-controlled I/O channels, Micromind's advanced encoding techniques load data from ordinary tape recorders at 3200 bits per second.


Micromind comes to you ready-to-use, factory assembled and fully tested. Among microcomputers, it has the largest memory capacity and the fastest storage. You're looking at the work of the finest display processor on the market. You won't find a microcomputer with a more powerful CPU.

You won't find a computer with a more flexible keyboard. You won't find anything to touch it at \$987.54.



So, quit the kuge scene and key into Micromind. You'll be a main frame performer, with all the comforts of home. We're not fooling... this is the cat's μ!

ECD CORP.
196 Broadway, Cambridge, Mass. 02139
(617) 661-4400

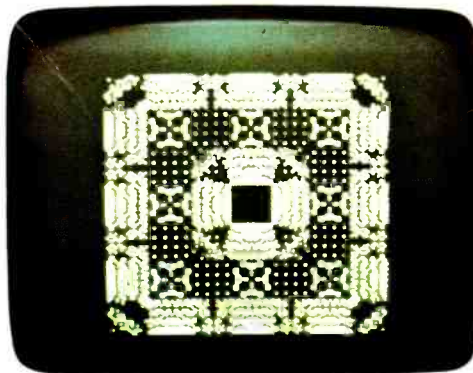

permits 15 additional microprocessors, parallel processing and vastly increased computing power.

System software—including ECD's own notsoBASIC high level language, on advanced error-correcting tape cassettes—provides a word processing editor, a

Name _____

Address _____

City/State _____ Zip _____

Fantastic! Check enclosed: \$987.54. Shipping paid by ECD

BankAmericard Master Charge Mass. Resident add 5% Sales Tax

_____ Expiration Date _____

Signature _____


Send me your brochure.

Actual unretouched photographs.

www.americanradiohistory.com

CIRCLE 51 ON FREE INFORMATION CARD

We've just made the impossible... a professional 3½ digit DMM Kit for less than \$60.

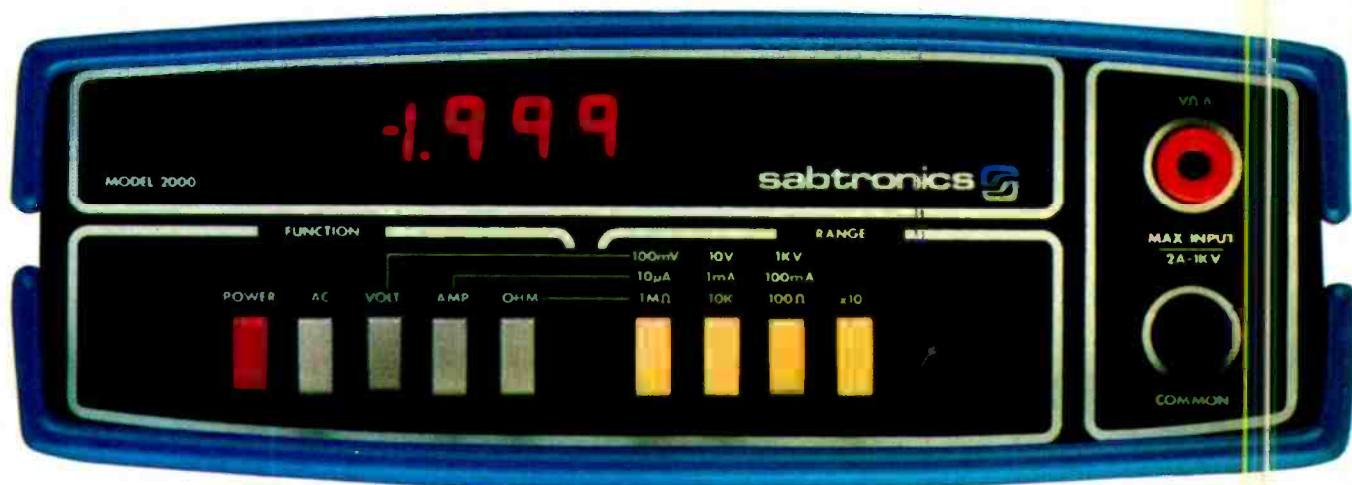

The Sabtronics Model 2000 is an impossible \$59.95! And that price still includes phenomenal accuracy, range and professional features.

This all-new bench/portable multimeter, reading to ±1999, has a basic accuracy of 0.1% ± 1 digit, and has five functions giving 28 ranges, 100% overrange and overload protection. So you know it's no toy!

Besides, what toys are as automatic as the 2000? With automatic overrange indication, automatic polarity, even automatic zeroing!

Yet the 2000 is easy to assemble. We send you all the parts you need, even the high-impact case. We also send you clear, step-by-step assembly instructions.

So you end up with a professional quality 3½ digit DMM for the unheard-of price of less than \$60. From Sabtronics, specialists in digital technology. And manufacturers of the impossible.

Order yours today!



Made in U.S.A.

sabtronics 
INTERNATIONAL INC.

P.O. Box 64683 Dallas, Texas 75206 (214) 369-7310

GUARANTEE:

Our guarantee to you; examine the 2000 DMM kit for 10 days. If you're not satisfied, return it unassembled for a full refund of purchase price.

SPECIFICATIONS:

DC volts in 5 ranges: 100µV to 1000V.
AC volts in 5 ranges: 100µV to 1000V.
DC current in 6 ranges: 10nA to 2A.
AC current in 6 ranges: 10nA to 2A.
Resistance in 6 ranges: 1Ω to 20MΩ
Input Impedance: 10MΩ
Display: 9mm (.36") LED.
Power requirements: 4.5 VDC to 6.5 VDC
(4 "C" cells - not included).
Size: 8"W x 6.5"D x 3.0"H.
(203W x 165D x 76H mm).

To: Sabtronics International, Inc.
P.O. Box 64683, Dallas, TX 75206

RE-8

Please send me _____ Sabtronics Model 2000 DMM kit(s) at \$59.95 each. _____ subtotal

Shipping and Handling, \$5.00 per unit* _____ subtotal

Texas Residents Add Sales Tax _____

TOTAL enclosed _____

Name _____

Street Address _____

City _____

State _____ Zip _____

* USA only. Canada, \$6.50. All Other Countries, \$10.00.

CIRCLE 73 ON FREE INFORMATION CARD

NOW PRODUCED IN NEW, LARGE **Xcelite** FACILITY

every electronic hand tool you'll ever need



The new, ultra-modern Xcelite manufacturing plant . . . the most advanced in the world for producing top quality forged tools . . . is now turning them out in record numbers to meet the ever-growing demand for the world's finest family of electronic hand tools. And at no-nonsense, competitive prices.

Employing the latest in manufacturing technology and quality controls, with every step in the production process under one roof, this new, large facility is continuing evidence that Xcelite . . . the

pioneer that brought you so many innovations in electronic hand tool design . . . is also the front-runner in production innovations.

Whatever your needs for electronic product assembly, service, or maintenance, the Xcelite line, finest and most diverse available anywhere, offers your best answers . . . perfectly aligned, hand-honed pliers and cutters, precision-machined screwdrivers and nutdrivers, exclusive thin-pattern adjustable wrenches, plus dozens of related tools and kits you might require.

It was no accident that Xcelite long ago earned . . . and still holds . . . "Preferred Status" among electronics professionals. So keep expecting leadership from Xcelite . . . and see your distributor for today's most wanted hand tools made by tomorrow's production methods.



Weller-Xcelite Electronics Division
The Cooper Group

P. O. Box 728, Apex, North Carolina 27502

CIRCLE 1 ON FREE INFORMATION CARD

www.americanradiohistory.com

Radio-Electronics®

THE MAGAZINE FOR NEW IDEAS IN ELECTRONICS

Electronics publishers since 1908

AUGUST 1977 Vol. 48 No. 8

BUILD ONE OF THESE

- 33 **Build This Video Modulator**
One-transistor device with built-in isolation switch permits direct connection of composite video signals to the antenna terminals of your TV set. **by Glen Dash**
- 36 **10-Function Digital Clock**
Simultaneous readout of time, date, alarm. Includes built-in countdown timer. **by Jeffrey G. Mazur**
- 40 **Build A Logic Probe For \$1**
Easy to build TTL tester can save you hours of troubleshooting time. **by Alex F. Burr**

COMPUTERS

- 27 **Microcomputer Trainer Equipment Report**
Infinite Systems Model UC-1800
- 42 **New Hobby Computers From Heath**
Two new machines—one 8080 based, the other an LSI-11; make a powerful team.

TELEVISION

- 32 **Picture Tube Restorer Equipment Report**
Oneida Model 98
- 60 **Service Clinic**
Double, double, toil and trouble. **by Jack Darr**
- 66 **Reader Questions**
R-E's Service Editor solves reader problems.

GENERAL ELECTRONICS

- 4 **Looking Ahead**
Tomorrow's news, today. **by David Lachenbruch**
- 45 **Pictures That Talk**
How to add sound to a silent, 8mm movie camera. **by Andrew Jaremko**
- 52 **Automotive Anti-Collision Systems**
Part II. How to make one that works. **by Martin B. Weinstein**
- 58 **Restoring Antique Radios**
How to get started with details on where to obtain parts and schematics. **by Morgan E. McMahon**
- 70 **Hobby Corner**
Homebrew breadboard every experimenter needs. **by Earl R. Savage**

STEREO HIGH-FIDELITY

- 54 **R-E Lab Tests Optonica Tuner**
AM/FM Stereo Model ST-3535 earns a "very good". **by Len Feldman**
- 57 **R-E Lab Tests Hitachi Receiver**
Model SR-903 rates "excellent". **by Len Feldman**

TEST EQUIPMENT


- 22 **Digital IC Tester Equipment Report**
Heath Model IC-7400
- 24 **CB Tester Equipment Report**
Hickok Model 388
- 49 **All About RF Signal Generators**
Part I: R-E looks at how they work, specifications, features and applications. **by Charles Gilmore**

DEPARTMENTS

- | | |
|-------------------------------------|---------------------------|
| 88 Advertising Index | 85 Market Center |
| 12 Advertising Sales Offices | 6 New & Timely |
| 14 Letters | 74 New Products |

ON THE COVER

Two major new computer systems are now available to the hobbyist. Teamed with a video terminal and a tape reader/punch/duplicator we photographed them for this month's cover. For full details see the complete story starting on page 43.

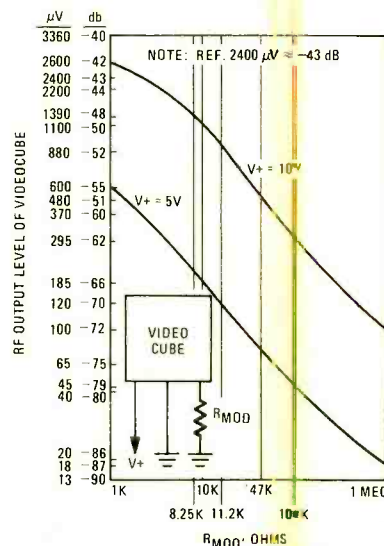

VIDEOCUBE INTERFACES video to RF antenna inputs of TV set. One resistor sets RF output level.

... turn to page 33

Radio-Electronics, Published monthly by Gernsback Publications, Inc., 200 Park Avenue South, New York, NY 10003. Phone: 212-777-6400. Second-class postage paid at New York, NY and additional mailing offices. One-year subscription rate: U.S.A., U.S. possessions and Canada, \$8.75. Pan-American countries, \$10.25. Other countries, \$10.75. Single copies: \$1.00. © 1977 by Gernsback Publications, Inc. All rights reserved. Printed in U.S.A.

Subscription Service: Mail all subscription orders, changes, correspondence and Postmaster Notices of undelivered copies (Form 3579) to Radio-Electronics Subscription Service, Box 2520, Boulder, CO 80322.

A stamped self-addressed envelope must accompany all submitted manuscripts and/or artwork or photographs if their return is desired should they be rejected. We disclaim any responsibility for the loss or damage of manuscripts and/or artwork or photographs while in our possession or otherwise.

As a service to readers, Radio-Electronics publishes available plans or information relating to newsworthy products, techniques and scientific and technological developments. Because of possible variances in the quality and condition of materials and workmanship used by readers, Radio-Electronics disclaims any responsibility for the safe and proper functioning of reader-built projects based upon or from plans or information published in this magazine.

looking ahead

Home computers: The video game will evolve into the home computer earlier than expected—later this year and early next. The home computer currently is a specialized and sophisticated hobbyist product, but video game manufacturers hope to convert every television set into an electronic brain, and prices initially can be expected to be as low as \$200 or \$300.

Most of the new home computers presumably will begin life as programmable games, but be expandable to computer operation, presumably as special programs are added. Bally, the pinball machine manufacturer, expects to introduce a programmable game later this year at under \$300, with cartridges \$20 each, including computer capability. Said a Bally spokesman: The game is expandable to do "anything IBM computers did a few years ago." Arnold Greenberg, president of toy manufacturer Coleco, calls home computers "one of the imminent next generations" and says his company is "deep into that project."

APF Electronics plans to introduce a \$200 computer this year "priced to attract both the consumer and the small businessman." Magnavox plans a game-computer combination at less than \$200 that can "do home math problems, take care of tax forms, solve financial problems." Magnavox says it's already listed 1,800 potential home computer applications.

PCM recording: Pulse code modulation (PCM) tape recording has audio professionals excited. One of the first such recorders shown in the U.S. was the subject of a paper at the recent Audio Engineering Society convention in Los Angeles by Mitsubishi. The recorder lays down nine parallel tracks on 1/4-inch tape running at 15 ips and records 60 minutes on a 10-inch reel. Here are the specs: Tape-speed variation, none. Crosstalk, wow-and-flutter, none. Harmonic distortion, 0.01%. Frequency response, DC to 20,000 Hz, ± 0.5 dB. Price of the Mitsubishi unit is \$3,600.

If that's a little steep, just wait a while. Sony will soon demonstrate a new black box that converts its Betamax videocassette recorder into a super-hi-fi PCM audio recorder. Specs and price still unknown, but it's scheduled to be unveiled for the Japanese market next fall—so an American version can't be too far off.

Direct-dial CB: Texas Instruments' debut in CB manufacture consists of two super-deluxe units—one mobile, one base station—with a unique direct-dial, or selective calling, feature. Either of the new transceivers can activate any other individual TI unit when the operator punches in a pre-determined five-digit number on the pushbutton keyboard, placing or receiving calls on any of the 40 CB channels or 80 SSB channels. Any five-digit number may be chosen as a calling number, and there are 8,000,000-to-1 odds against any two users selecting the same code in a given area. The radios can also be programmed to call the five most often-used numbers by pushing a single button. The transceivers employ two microprocessors. Prices of the units are over \$300.

New picture tubes: RCA, Sylvania and Zenith are offering television set manufacturers new picture tubes which makes possible the use of the self-converging slot-mask in-line-gun principle in the 25-inch size without a reduction in resolution. All three tubes have 100-degree deflection, thereby shortening front-to-back depth. The gun is a tri-potential type, the third voltage adding sharpness and resulting in an electron-beam spot size smaller than that of a conventional gun in a regular slot-mask tube. If these large tubes achieve set manufacturer acceptance, the slot-mask will have captured the TV industry across the board in all sizes, resulting in easier-to-manufacture sets which require fewer critical adjustments.

New color TV's: Electronic varactor tuning, automatic color circuits and energy-saving chassis are the key features of the new 1978 color sets. In most cases, this year's changes aren't dramatic, but represent a continuation of trends that started in some models introduced earlier. Here's a rundown on some of the recently introduced lines:

Zenith—*Color Sentry* automatic color adjustment system is now available in every screen size from 13 to 25 inches, in 49 of its 55 models. Likewise, you can find electronic tuning in all screen sizes, and 22 models have wireless remote control. No major innovations—but rather a spread of high-end features throughout the line.

RCA—The power-saving "Xtended Life" chassis, first introduced in 19-inch models (*Radio-Electronics*, June 1977), has now been adapted to all 25-inch sets, resulting in 25% energy savings in the 27.5-kV *XL-100* sets and 30% in the 29.5-kV *ColorTrak* sets. Varactor tuning is in all 25-inch *ColorTrak* models; only three 25-inch sets lack the *ColorTrak* automatic color feature.

Sony—Resting on its laurels this year, with addition of only two really new models—a 7.7-inch battery portable color set and a 21-inch remote-controlled varactor-tuned model. Sony's big change came last year with the brighter *Trinitron Plus* tube and the addition of electronic tuning to remote models.

Panasonic—Became the second manufacturer (after GE) to introduce a set which automatically adjusts to the broadcaster's vertical interval reference (VIR) signal to set color and tint. The VIR feature is in one 19-inch model. Panasonic also added *Color Pilot*, its own automatic color circuit. Its 25-inch sets (made by Panasonic of Canada) use the new Sylvania 100-degree tri-potential slot-mask tube.

Sylvania—All the results weren't in at press time, but one feature is a new pushbutton-keyboard tuner that permits digital random-access tuning of any TV channel, accompanied by another series of programmable pushbuttons which can be set for the viewer's favorite channels for instant recall to bring in the channel at a single push of the button.

Hitachi—Probably America's most elaborate remote control is on one 19-inch set, with 23 pushbuttons

continued on page 79

FREE

The world's largest catalog
of easy-to-build, money-saving
electronic kits



- Power Supplies
- Oscilloscopes
- Frequency Counters
- VTVM's and VOM's
- Ham Radio Gear
- Digital Programmable Color TV
- Hi-Fi Components
- Electronic Clocks and Weather Instruments
- Learn-at-home Electronics Courses
- Auto, Fishing, Marine and Aircraft Accessories — nearly 400 kits in all!

Watch for the Heathkit Computers this Fall!

Every Heathkit product comes with a fully-illustrated, step-by-step assembly manual that tells you everything you need to know to make kitbuilding fun and easy. Thousands of people have discovered the satisfaction — and savings — of handcrafting a fine piece of electronic equipment. You can build it better... let us show you how.

Send for your FREE Catalog today! ▶

Heath Company, Dept. 020-320, Benton Harbor, Michigan 49022

HEATH Schlumberger	Heath Company, Dept. 020-320 Benton Harbor, Michigan 49022	FREE
Please rush me my FREE Heathkit Catalog. I am not on your mailing list.		
NAME _____		
ADDRESS _____		
CITY _____		STATE _____
CL-635		ZIP _____

CIRCLE 100 ON FREE INFORMATION CARD

Fiber-optic phone link now installed in England

Europe's first high-capacity telephone link using laser beams over optical fibers was demonstrated in Harlow, England, by four European companies of ITT. The light-carrying fibers run nearly 6 miles through normal underground cable ducts between telephone exchanges in Hitchin and Stevenage, two towns about 26 miles north of London. The fibers are contained in a cable 7 millimeters (approximately $\frac{1}{4}$ inch) in diameter, and can carry nearly 2,000 simultaneous conversations.

The 7-mm diameter optical cable runs through normal telephone cable ducting between the two towns where post-office exchange buildings house the multiplexing and optical terminal equipment. Two repeaters are spaced at 3-km intervals in standard repeater cases in manholes along the route. Each repeater point is equipped with two regenerators, one for each direction of transmission. A total of six gallium aluminum arsenide lasers is used in the system.

The optical cable comprises two working fibers, a spare fiber, four metal conductors (two of which carry the power to the repeaters and two of which are "order wires" used by technicians) and a filler fiber that rounds out the cable. These eight cores are grouped round a central steel strength member and completely sheathed in polyethylene. In spite of its novel method of transmission, the new system works with standard multichannel digital multiplex equipment.

The new optical telephone link will undergo several months of testing with speech and test signals, to demonstrate the system's ability to handle live telephone calls, and the suitability for use in public telephone networks.

EIA writes to the President; wants action on TV imports

The Electronic Industries Association, in a letter signed by president V. J. Adduci, has asked President Carter to give "serious and appropriate consideration" to US International Trade Commission findings that television receiver imports are causing injury to the domestic television receiver manufacturing industry. Appended was a resolution by the EIA Board of Governors stating in part:


"The Board of Governors of the EIA supports the findings of import injury to the U.S. television receiver manufacturing industry announced by the ITC March 8, 1977; and further:

"The Board specifically urges the President of the United States to give immediate, serious and appropriate consideration to these specific findings of import injury; and further

"The Board of Governors directs the President of the Association to pursue this matter with the White House in order to determine how most effectively to communicate the impact of these findings and so advise the industry."

Mobile telephone control head is microprocessor controlled

The new deluxe Motorola *Pulsar II* mobile telephone head features a number of significant technological advances over conventional units. It offers pushbutton dialing, abbreviated dialing, on-hook dialing and call processing, recall of last number dialed, channel review and select, channel number display, and illuminated dial pad and graphics. The pushbutton pad is located on the back of the handset, allowing the subscriber to dial a number in safety and with one hand.

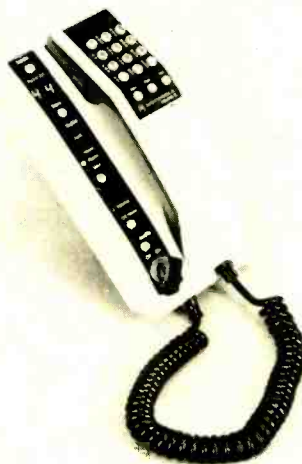

Abbreviated dialing for up to ten numbers is available. The numbers are programmed by the subscriber from the dial pad and can be changed readily. A reference directory on the underside of the handset identifies the stored numbers and their memory locations. On-hook dialing allows a number to be entered from the dial pad with the handset in the cradle and holds the number in the microprocessor. Dialing is initiated when desired, by pressing the SND button.

There are three modes of operation: Home, Roam and Manual. In the Home mode, the receiver scans and selects only the channels available in the home city. The radio is prevented from locking in on a foreign channel. In the Roam mode, the subscriber selects the channels for the city in which he is operating at the time. The Manual mode is used in systems where there is no automation.

New pulse generating method produces narrower pulses

A new approach to pulse generation that requires only a permanent magnet, a short length of specially treated magnetic wire, and a pickup coil, produces narrow pulses of 1 volt or more, independent of the rate of change of the magnetic field. Superficially resembling other types of generators that depend on a magnetic core with a coil around it, plus an increasing or decreasing magnetic field, its action is quite different. Instead of a steady rise in voltage in the coil as the magnetic field increases, there is little or no change up to a certain threshold level. Then the core (Wiegand wire) goes to full magnetic saturation, producing a sharply defined pulse of fixed width.

The effect is based on the discovery by John Wiegand that by a combination of torsional strain and stretching in the manufacturing process, a magnetic wire of a homogeneous alloy may be made to have a hard "shell" that requires a much higher magnetic field to change its direction of magnetization than does the soft inner core. The practical effect is that an increasing magnetic field gives rise—once a threshold field strength is reached—to a sudden large change of flux, which induces a voltage pulse in a pickup coil wound around or close to the Wiegand wire.

A typical Wiegand wire could be about an inch long and 10 mils (.01 inch) in diameter. A pickup coil of about 1,000 turns of No. 38 wire (more or less, depending on the application) would produce the voltage. Such a wire would produce a 1.5-volt pulse with a width at half amplitude of about 20 μ sec. For most applications a magnetic field of as little as 100 to 150 oersteds is ample, permitting the use of a very small magnet.

A wide range of applications is possible—a large number of devices using pulses can be improved by the constant-voltage, non-rate-dependent characteristics of the Wiegand wire. In a rotating system—for example—such as a tachometer or electronic ignition equipment, the voltages produced by an ordinary magnetic pickup varies with speed—with the Wiegand wire it is constant at all speeds.

New York Consumer Hi-Fi Show to go into new quarters

The 1977 Consumer Hi-Fi Show, September 16, 17 and 18, will be held at the Sheraton Inn, 42nd Street and Twelfth Avenue, New York, NY. The new location, states show president Charles Ray, offers many conveniences, including inside hotel

continued on page 12

Shakespeare's Big StickTM Antenna. World famous performance. And right in your own backyard

Punch out the big signal from 60 feet up with Shakespeare's Big Stick. The omnidirectional fiberglass base station antenna that outperforms anything on the 40 channel band. Illuminating 12 times more capture area. And sending the signal energy out to the horizon in a unique, low angle radiation pattern.

This half-wave coaxial sleeve antenna incorporates exclusive Shakespeare engineering in fiberglass to outrange taller, heavier metal antennas under all conditions. Withstanding ice and winds up to 125 MPH with no damage to reception. And pretuned to a low SWR over the 40 channel band.

Move up for the big gain with Shakespeare's Big Stick. Pretested. No ground radials. Works anywhere with any length of cable. Also available in a low cost, 2-piece model, Big Stick II.

Shakespeare



The best antenna going. And coming.

Big Stick, Style 176
Used as part of this country's DEW
line defense system. Less than \$45.

Shakespeare Company Antenna
Group P.O. Box 266,
Columbia, S.C. 29202
In Canada:
Len Finkler Ltd.,
Ontario.

The Shakespeare Company 1977

CIRCLE 74 ON FREE INFORMATION CARD

Learn digital computer

NRI is the only school to train you at home on a real digital computer.

Learn computer design, construction, maintenance and programming techniques on your own programmable digital computer.

Qualified technicians are urgently needed for careers in the exciting new field of digital and computer electronics . . . and the best way to learn digital logic and operations is now available to you in NRI's Complete Computer Electronics Course.

This exclusive course trains you at home on your own digital computer! This is no beginner's "logic trainer", but a complete programmable digital computer that contains a memory and is fully automatic. You build it yourself and use it to define and flow-chart a program, code your program, store your program and data in the memory bank. Press the start button and the computer solves your problem and

displays the result instantly.

The NRI digital computer is one of 10 kits you receive in the NRI Complete Computer Electronics Course. You build and use your own TVOM, and experiment with NRI's exclusive Electronics Lab. You perform hundreds of experiments, building hundreds of circuits, learning organization, operation, trouble-shooting and programming.

New NRI Memory Expansion Kit

The Model 832 NRI Digital Computer now comes with a new Memory Expansion Kit. Installed and checked out in 45 minutes, it doubles the size of the computer's memory, significantly increasing the scope and depth of your knowledge of digital computers and programming. With the large-scale IC's you get the only home training in machine language programming . . . experience essential to trouble-shooting digital computers.



electronics at home.

NRI offers you five TV/Audio Servicing Courses

NRI can train you at home to service Color TV equipment and audio systems. You can choose from 5 courses, starting with a 48-lesson basic course, up to a Master Color TV/Audio Course, complete with designed-for-learning 25" diagonal solid state color TV and a 4-speaker SQ™ Quadraphonic Audio System. NRI gives you both TV and Audio servicing for hundreds of dollars less than the two courses as offered by another home study school.

All courses are available with low down payment and convenient monthly payments. All courses



provide professional tools and "Power-On" equipment along with NRI kits engineered for

training. With the Master Course, for instance, you build

your own 5" wide-band triggered sweep solid state oscilloscope, digital color TV pattern generator, CMOS digital frequency counter, and NRI electronics Discovery Lab.



*Trademark of CBS Inc.

NRI's Complete Communications Course includes your own 400-channel VHF transceiver

NRI's Complete Communications Course will train you at home for



one of the thousands of service and maintenance jobs opening in CB; AM and FM trans-

mission and reception; TV broadcasting; microwave, teletype, radar, mobile, aircraft, and marine electronics. The complete program includes 48 lessons, 9 special reference texts, and 10 training kits. Included are: your own "designed-for-learning" 400-channel VHF transceiver; electronics Discovery Lab™; CMOS digital frequency counter; and more. You also get your all

important FCC Radio-telephone License, or you get your money back.



CB Specialist Course also available



NRI also offers a 37-lesson course in CB Servicing with your own CB Transceiver, AC power supply, and multimeter. Also included are 8 reference texts and 14 coaching units to make it easy to get your Commercial Radiotelephone FCC License.

You pay less for NRI training and you get more for your money.

NRI employs no salesmen, pays no commissions. We pass the savings on to you in reduced tuitions and extras in the way of professional equipment, testing instruments, etc. You can pay more, but you can't get better training.

More than one million students have enrolled with NRI in 62 years.

Mail the insert card and discover for yourself why NRI is the recognized leader in home training. Do it today and get started on that new career. No salesman will call.

If card is missing write:

NRI NRI SCHOOLS
McGraw-Hill Continuing
Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016

parking plus three large parking fields in the immediate vicinity.

Another advantage is practically "at-the-curb" service of three principal bus lines, the 42nd St. crosstown, the 34th St. crosstown and the 49th/50th St. crosstown.

The area is at the hub of the new federally sponsored Westway and within blocks of present access to upper Manhattan and other New York City boroughs, to Hudson River tunnels and New Jersey bridges, and to westward and northbound roads into Westchester County and Connecticut. Also, the Circle Line boat pier on the Hudson River, is diagonally across from the Sheraton.

National Service Convention in Florida, August 16-21

The National Electronic Service Convention, sponsored by the National Electronic Service Dealers Association and the NESDA Florida Chapter/Orange County, opens Tuesday, August 16, and runs through Sunday, August 21, at the Sheraton Towers Hotel, Orlando, FL. Besides the regular annual meeting, there will be special social and entertainment events, the National Business School, the National Technical School, a golf tournament, addresses and discussions with government and industry spokesmen, the annual trade show "The Magic Kingdom of Electronics," and many other events.

The \$40 registration fee includes admission to all meetings, workshops and functions. The following special fees will be charged: A \$15 golf tournament fee for carts and refreshments; the Profitable Service Management School requires \$20 for members and \$40 for nonmembers; and a fee of \$10 is required for the Technical Schools, including the luncheon.

Registration will be on Tuesday, August 15. The rest of the day can be devoted to social activities with family, friends or business associates.

The Profitable Service Management School and the Technical School are scheduled for Thursday. The PSM School features business management, and will cover typical business-related problems. Attendees will have an opportunity to tell how they confronted such problems, and will participate in round-table solution-finding discussions.

The Technical School (College of Service Knowledge) will hold ten simultaneous sessions to be repeated four times during the day. Several subjects will be covered. "Servicing CB" will be discussed by Forest Belt, and "Fundamentals of Logic Circuits," by Ken Parese. The national service managers and field representatives of Quasar and Sony's Betamax will instruct on the special features and peculiarities of their products. Precision Tuner Service will

examine tuner problems. Larry Steckler, editor of **Radio-Electronics**, will address the noon luncheon on the subject, "Outlook for the Service Business for the Next Five Years."

The special Trade Show on Friday will be a top feature of the convention. In addition to manufacturers' booths, displaying new product lines, service and test equipment, there will be 25 booths devoted to NESDA projects, troubleshooting contests, serviceability inspections and "How To" exhibits.

A Licensing Seminar is planned for all involved in or interested in state or local licensing programs. Service dealers and technicians will find out how registration and licensing work in their areas.

For further information and details, contact NESDA, 1715 Expo Lane, Indianapolis, IN 46224.

CB license applications number nearly one million per month

The Federal Communications Commission reports that CB license applications received during last January numbered close to one million, breaking all monthly records and approaching the annual record of only a few years ago.

John Sodolski, head of the Communications Division of the Electronic Industries Association, hailed the addition of 17 new channels to the band as "coming just in time." These, said Sodolski, provide CB'ers with "74% more channel availability than the old 23 channels. Without the additional channels, congestion in urban areas would have become first annoying, then intolerable."

But even with millions of CB sets being added each year, he believes that "almost everyone agrees it will take a long time to crowd the additional channels to the same extent as the original 23."

Buyers are getting bargains in 23-channel CB radios

Many first-time CB purchasers are rushing to take advantage of the low prices on 23-channel CB models, according to John Sodolski, staff vice president of the Communications Division of the Electronic Industries Association (EIA). Dealers must close out their stocks of 23-channel radios which do not meet the higher standards that apply to 40-channel radios before January 1. Therefore some fantastic bargains are available in the 23-channel models.

"There's never been a better time to buy a new CB radio," says Mr. Sodolski. He also notes "a growing demand for the new 40-channel units, particularly in urban areas where the lower 23 channels have been overloaded." **R-E**

Radio-Electronics®

Hugo Gernsback (1884-1967) founder

M. Harvey Gernsback, KOD-6694
editor-in-chief and publisher

Larry Steckler, KTX-3644, CET, editor

Robert F. Scott, CET, W2PWG,
KXK-8533, technical editor

Arthur Kleiman, KTZ-3288,
managing editor

Jack Darr, CET service editor

Leonard Feldman
contributing high-fidelity editor

Karl Savon, semiconductor editor

David Lachenbruch, contributing editor

Rudolph F. Graf, contributing editor

George Whalen, contributing editor

Vincent P. Cicenia, production manager

Dale Allinson, production assistant

Harriet I. Matysko, circulation director

Sheila Wertling, circulation assistant

Arline R. Bailey, advertising coordinator

Cover design by Louis G. Rubsamen

Cover photo by Walter Herstatt

Radio Electronics is a member of the *Institute of High Fidelity* and is indexed in *Applied Science & Technology Index* and *Readers Guide to Periodical Literature*.



Radio-Electronics magazine is published by Gernsback Publications, Inc.
200 Park Ave. S., New York, NY 10003
(212) 777-6400

President: M. Harvey Gernsback

Vice President: Larry Steckler

Treasurer: Carol A. Gernsback

Secretary: Bertina Baer

ADVERTISING SALES

EAST

Stanley Levitan, KZA-5580
Radio-Electronics
200 Park Ave. South
New York, NY 10003
(212) 777-6400

MIDWEST/Texas/Arkansas/Okla.

Ralph Bergen, KXD-8396
Jim Reilly
The Ralph Bergen Co.
6319 N. Central Ave.
Chicago, IL 60646
(312) 792-3646

PACIFIC COAST Mountain States

Jay Eisenberg, KYF-3277
J.E. Publishers Representative Co.,
8732 Sunset Blvd.,
4th Floor,
Los Angeles, CA 90069
(213) 659-3810
Sales Mart Building
1485 Bayshore Blvd., Box 140
San Francisco, CA 94124
(415) 467-0125

SOUTHEAST

J.E. Publishers Representative Co.,
214-387-2424

new grounds to buy Ungar

New OSHA®
#750 Three-Wire
Grounded Handle
is easy to use,
lightweight and
biomechanically
designed to remain
cool and
comfortable during
continuous use.

Unique,
spring-loaded heat
reflecting ground
plate eliminates
electrostatic tip
potential.

Ungar's new "S"
and "HP" steel,
thread-together
heaters taper-fit
firmly into the
handle and are
available in several
wattages and types.
1. For thread-on
Standard Wire tips.
2. Integral heater/
tips.

The new load-
modulated "HP"
High Performance
Series Heaters
respond
automatically to
temperature
changes and
provide the capacity
of much larger irons.

Heat resistant,
three-wire, flexible
cord and NEMA
plug assure long
life, easy handling
and a positive
ground from tip to
plug.



Division of Eldon Industries, Inc. / 233 East Marville / Compton, CA 90220 / 213 774-5950

CIRCLE 25 ON FREE INFORMATION CARD

BITS, BYTES & BALONEY!

For all of you non-aficionados of the Computer Art...

BIT — an electrical signal or logic level (like the zero or one of the Binary numbering system) — Motorola's M6800 is an 8-bit MPU.

BYTE — a set of eight electrical signals, or logic levels (bits) — The M6800 is capable of addressing 65,000 bytes of memory.

BALONEY — the state-of-the-MPU-art that says that you must be a trained computer expert to use a Microprocessor in a practical manner. More and more "individuals" are becoming self-styled computer 'experts' at home, with their own MPU kits. They are doing things that others said, "couldn't be done," (just because they forgot to ask).

NOW'S YOUR CHANCE — for only \$235.00 (plus \$5.00 postage and handling) you can order your MOTOROLA M6800 MICROPROCESSOR EVALUATION DESIGN KIT, directly from Motorola.

IT'S A COMPLETE KIT — the MEK6800D2 Kit has all the parts necessary to complete the system and get "On The Air," except for the Power Supply. It includes:

- o (1) MC6800 Microprocessing Unit
- o (2) MCM6810 — 128 x 8 Static RAMs
- o (2) MC6820L — PIA's
- o (1) MC6830L — Program ROM
- o (1) MC6850L — ACIA
- o (2) Printed Circuit Boards
- o (1) MC6871 — Clock
- o (1) 6-Digit Seven Segment Display
- o (1) 24-key Keyboard
- o Complete kit of resistors, capacitors, sockets, circuits, etc. All the parts necessary to the system, but the Power Supply.

THE M6800 MPU KIT FEATURES

- o 24-key Keyboard
- o 7 Segment Display
- o Cassette Interface
- o EROM Expandable
- o RAM Expandable
- o Wire Wrap Capability
- o Parallel & Serial
- o Interface Capability
- o Single 5-Volt Supply Required
- o Layout on Boards
- o Documentation

IF YOU'RE READY FOR A MICROPROCESSOR — THE M6800 IS READY FOR YOU!

Send your order in today for one of the most powerful MPU Kits on the market. Fill in the order form below and mail it with your check to:

MOTOROLA
MPU KIT SALES
Department RE
P.O. Box 27605
Tempe, AZ. 85282



I have enclosed \$235.00 plus \$5.00 shipping and handling (add applicable state and local taxes) in check or money for each MEK6800D2 Microprocessor Design Kit II. Please send _____ Kit(s).

NAME _____

ADDRESS _____

CITY _____

STATE _____ ZIP _____

Please print clearly — Make checks payable to Motorola Inc.



CIRCLE 27 ON FREE INFORMATION CARD

Letters

MICROCOMPUTER WORKSHOP

For those of your readers that are interested, a seminar program will be held in September at the Virginia Polytechnic Institute and State University, Blacksburg, VA. Dr. Peter Rony, Dr. Paul Field and I will direct the courses.

Featured will be two workshops: The first, held on September 13 and 14, will be based on small-scale and medium-scale TTL integrated circuits. Many hours of lab time with individual breadboarding stations and in-depth lectures will be provided. The second workshop concerns itself with microcomputer interfacing, and will be held September 15-17. Available for participant use will be over 20 operating 8080 microcomputers.

Both workshops will be held at the Institute's Extension Center in Reston, VA (near Dulles Airport). For more information, write: Dr. Norris Bell, Virginia Polytechnic Institute and State University, Blacksburg, VA 24061, or call (703) 951-6328.


DAVID G. LARSEN
Blacksburg, VA

MORE ON THE LOGIC PROBE

I built Larry Fort's probe for testing logic circuits ("Tone Probe for Testing Digital IC's", March 1977 issue) and would like to anticipate some letters you may get on the specified 100-ohm speaker. Use any speaker. I used an unmarked 4- or 8-ohm speaker, a 100-ohm resistor and a 25- μ F capacitor. If you want to get fussy, replace R1, R2 and R6 and R5 with 100K and 500-ohm pots adjusted for optimum performance. They'll run about 70K to 80K and 350 to 400 ohms. However, I built mine with the values specified and only a speaker change. Everything worked fine.

L. G.
Pompano Beach, FL

Larry Fort's digital probe can be modified to include a volume control as shown



in the schematic. As a high school physics teacher, articles on building digital equipment are most appreciated. Keep it up!
PHILIP REHBERGER
Oshkosh, WI

NEW FORCE EXPLAINED?

Peter Lefferts very effectively answered some of the easier questions in "A New Force Answered" (Letters Column, April

1977 issue). He did not inform us of a permanent magnet that has a magnetic field similar to the field around a current carrying conductor.

By using a solder gun and a flexible copper wire he correctly points out the AC energized copper wire will be pulled toward the iron bar or sheet. If he reduces the iron bar to an iron wire, such as described in "A New Force" (Letters Column, Oct. 1976 issue) he could have found a new force. If DC is fed to the flexible wire the wire would not only be pulled to the iron wire but also the copper wire would twist so it was at right angles to the iron wire.

More important than either letter, if we insert any iron, be it wire, bar, ball or sheet, into a magnetic field there is no longer a magnetic field beyond the iron. A permanent magnet causes a field to appear and inserting iron into this field causes the field to disappear from a given space so we can make magnetic waves. We know of no wave phenomena from which we can't extract energy. We may not have an energy crisis if today's magnets are truly permanent or have infinite energy and we can make waves by inserting and removing iron from the magnet's static field.

JOHN W. ECKLIN
San Martin, CA

2650 CORRECTIONS

With regard to my construction article on the 2650 Computer System (**Radio-Electronics**; April, May and June 1977 issues) I have the following corrections:

1. In the timing chain and sync generator section of the schematic, the center pin of IC61-a is hooked to 5 volts rather than $\bar{A}11$. On the same diagram, R9 should be labelled as 330 ohms rather than 100.

2. On the cassette interface diagram, there is no connection between IC74 pins 6 and 1. Also, to improve the cassette's reliability, IC25 was changed to a 74132 (a Schmitt trigger) and C4 was removed. Also, IC73-b was disconnected from pin 10 of IC76. This allows the removal of C13 and R20.

3. On the parts list, IC26 is listed as a 9344. Its actual part number is 9334, which is a bit-selectable output port, not the multiplier listed.

4. The cost of the predrilled and etched circuit board is actually \$40 instead of \$30. Also there is a \$3 postage fee.

5. The third paragraph under "Theory of Operation" explains how the processor and the display share the same RAM. Instead of this arrangement, the OPAK pin of the processor is grounded, and it is allowed access to the display RAM anytime. The processor, therefore, has

continued on page 16

THE FEEL OF MUSIC

The Realistic[®] Mach One isn't just for your ears!

Multicell midrange horn

Provides a true spatial image. Smooth 800-8000 Hz response for a "live" presence.

Heavy-duty tweeter horn

Delivers crisp and clean highs from 8000 to 25,000 Hz.

Treble, midrange L-pads

Calibrated controls for precise adjustment of response to suit room acoustics.

Oiled walnut veneer

We make speaker positioning easy by including a cabinet with the look and feel of fine furniture — so the Mach One looks great anywhere!



Massive 15" woofer

The acoustic suspension, large-excursion cone has an effective radiating area of over 100 square inches—the equivalent of a huge air-pump — for bass you can feel all the way down to 20 Hz. The four-layer voice coil is wound on a brass form for heavy power handling capacity—over 100 watts peak program material!



Removable grille

The sturdy grille frame snaps on and off for easy access to the response controls.

A great loudspeaker doesn't just please your ears. It reproduces deep bass with a power and punch your entire body feels . . . it recreates the live ambience so accurately that when you close your eyes, you're "on location" in that auditorium, concert hall or night spot . . . and it delivers top performance with both moderate and high-powered amplifiers. If you think we're talking about a \$400 speaker, you haven't experienced the Mach One. For under \$200 each*, you get incredible "live theatre" sound from a name you can depend on: Realistic. Backed by 56 years in audio design, manufacture, sales and service. So bring in your favorite record for a Mach One audition, and discover the feel of music.

SOLD ONLY WHERE YOU SEE THIS SIGN:

Radio Shack[®]

A TANDY COMPANY • FORT WORTH, TEXAS 76107
OVER 5000 LOCATIONS IN NINE COUNTRIES



These two credit cards honored at most Radio Shacks.

*Price may vary at individual stores and dealers.

LETTERS

continued from page 14

priority over the display as far as accessing the on-board RAM is concerned.

6. In the parts placement diagram of the article, the lower potentiometer should be marked R22 rather than R20. Also, a D8 is on the diagram; it should be R18.

Many thanks to all those readers who helped me find these errors.

JEFFREY ROLOFF

PROJECT SUGGESTIONS

I've built some of the projects that appeared in **Radio-Electronics** and found them rewarding and useful. However, there are some other projects that I'd like to see appear that I think would be of interest to your readers:

1. An intercom system that uses the AC power line as the carrier and can be plugged into any AC receptacle. Although there are some similar intercoms available, what I was thinking of is circuitry that would enable several apartments or homes to use their respective units without interference with each other;

2. A battery charger that could charge several battery sizes simultaneously;

3. A circuit monitoring the AC line that would be sensitive to a power failure. During a failure, it would automatically switch the attached circuit to battery, and then back to AC when power was restored;

4. A 6- and 12-volt battery charger that could be adjusted for a specific voltage range and left connected all the time. This battery could be connected to the previous circuit and be used only during power failure.

NORBERT BACTOWSKI
Los Angeles, CA

ELECTRONIC JOURNAL

I have an announcement that should be of interest both to you and your readers. The Washington D.C. Amateur Computer Society has announced publication of the first "electronic journal" available via a computer link to anyone in the U.S. having a computer terminal and a phone coupler. No "password" or account number is necessary.

The Journal is published once a month on the DEC System-10 of the Catholic University of America and is stored in the university's computer center as a "free access" text file. To get it, dial 202-635-5710 for a 110 Baud line, or 202-635-5730 for a 300 Baud line.

The DEC System-10 responds with its answer tone. Activate your modem, then hold down the control key and type a "C." The computer should echo an up-arrow and a "C." If it doesn't, try doing it several times; if nothing happens, perhaps the computer is either down for maintenance or has "crashed" due to some problem. Try calling again later. If you get the proper echo (the up-arrow and "C"), then type "I," followed by a carriage return. The system monitor will tell you

who, what, when and where it is; something like this:

CATHOLIC U. 507B20 19:39:01 TTY60
SYSTEM 95

The monitor will then type a period on the next line, indicating that you're talking with the timesharing monitor and that it's waiting for instructions. To get the Journal, type "HELP WACS" followed by a carriage return, and the computer will proceed to type it out.

If you're going to read the Journal on a TV Typewriter display instead of printing on a hardcopy device, just tape the phone output so you can replay the Journal when you want. You can stop the output any time—just type "Control-O" (hold the control key down and type "O.")


In this "electronic mail service," the program runs on a timesharing system that moves the information stored in a disk file to a serial communications port. Since the service uses computer time made available by the university, it would be a good idea not to use it during regular business hours—late at night (using WATS lines, perhaps) or weekends would be preferable.

You can also get the Journal in printed form. It differs from the on-line version slightly—if a picture of "Snoopy" is on the cover page, it is omitted from the electronic version.

ROBERT JONES, Director
Washington Amateur Computer Society
4201 Massachusetts Ave.
Washington, D.C. 20016

R-E

A "bestseller" you'll never put down.

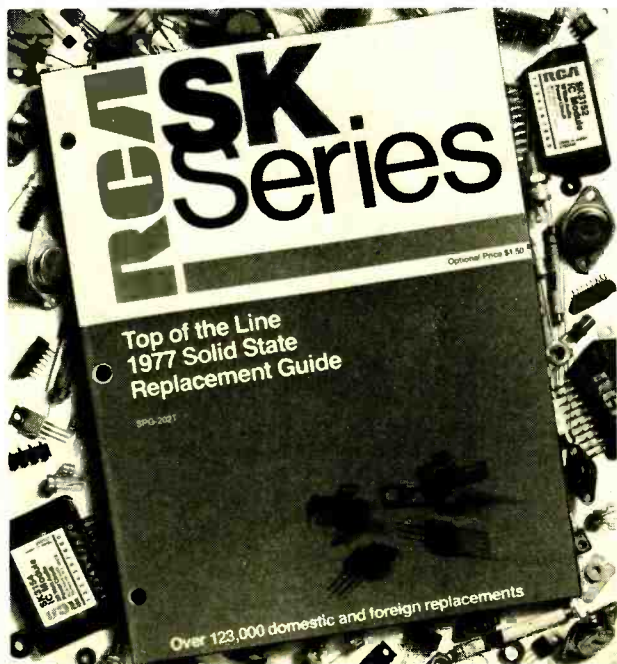

It's RCA's all new 1977 "Top of the Line" SK Series Replacement Guide. The most comprehensive list to date of transistors, rectifiers, thyristors and integrated circuits — 381 RCA types, including 68 brand new, that will replace 123,000 domestic or foreign semiconductors in entertainment and industrial equipment. The 68 new types have enabled us to increase our replacement capability by over 11,000 additional industry devices.

You can't afford to be without it. The 1977 Replacement Guide is a complete, accurate information source for your Solid State replacement needs. The book represents thousands of hours of engineering know-how. Keep in mind, too, that RCA SK replacement semiconductors measure up to strict AQL standards.

Get yours now. RCA's SK Replacement Guide. Contact your RCA Distributor. Or send \$1.50 (check or money order) to RCA Distributor and Special Products Division, PO Box 85, Runnemede, NJ 08078.

RCA SK Replacement
Semiconductors

Portable 3¹/₂ Digit DMM

The
Model 175
From
Data
Precision
\$189
Complete.



Model 175 on Bench Stand



High performance.

The Model 175 gives you 32 ranges of measurement capability, six functions, 0.1% DCV accuracy guaranteed for a full year, and 100 microvolts resolution. You can measure DCV from ± 100 microvolts to $\pm 1000V$, ACV from 100 microvolts to 500V with a frequency response of 30Hz to 50kHz, DC Current from ± 100 nanoAmps to $\pm 2A$, AC Current from 100 nanoAmps to 2A with a frequency response of 30Hz to 50kHz, and Resistance from 100 milliohms to 20 Megohms with two excitation voltages.

Superb portability.

All this performance has been designed into an instrument that's remarkably small (1³/₄" H x 5¹/₂" W x 3¹/₂" D, 34 cu. in.), light (22 oz.), and rugged. And the Model 175 delivers lab accuracy anywhere you take it. It operates from an AC line, or rechargeable NiCd batteries provide 6 hours of in-spec operation. (Both are included in the price, of course.) And the 175 automatically recharges whenever line-connected whether switched on or off, so it's always ready to go!

Hi/Lo resistance measurement.

This special resistance measurement function allows you to measure with Hi excitation of 2.5V (exceeds semiconductor forward threshold), and Lo excitation, 300mV (below silicon junction threshold), for in circuit resistance measurement without turning on semiconductor junction. No need to unsolder components.

Overload protected!

For exceptional safety. All DCV ranges can take $\pm 1000V$, all ACV ranges to 500V, all Resistance ranges up to 250V... continuously — without loss of calibration or damage to the instrument. Current ranges are protected by a 2A fuse easily accessible in a test lead.

And more!

- 100% Overage!
- Automatic Zero!
- Big, Bright 0.43" LED display!
- Recharge Indicator

The Model 175, complete, is only \$189!

Everything you need to put the Model 175 into immediate operation is supplied with the instrument: the rechargeable NiCd battery module, line cord with recharger, a pair of test leads, alligator clips, carrying case, and complete test documentation...

And, if you should want to make your 175 even more versatile, optional accessories such as a high voltage probe, AC current clamp, mini-to-standard banana adaptor, pedestal stand, rack mount, deluxe leather case, and high impact carrying case are available.

For complete information on these and other Data Precision instruments or a demonstration, contact your local Data Precision representative or Data Precision Corporation, Audubon Road, Wakefield, MA. 01880 USA (617) 246-1600. TELEX (0650) 949341.

The Model 175 is available from stock at local representatives.


DATA PRECISION U.S. REPRESENTATIVES

AL (205) 533-5896	IL (312) 593-0282	NJ (S) (215) 674-9600	TX (N) (214) 234-4137
AZ (602) 253-6104	IN (317) 293-9827	NM (800) 528-4512	TX (S) (713) 461-4487
CA (N) (408) 733-8690	MA (617) 245-5940	NY (N) (315) 446-0220	TX (W) (512) 837-3881
CA (S) (714) 540-7160	MD (301) 622-4200	NY (S) (516) 482-3500	UT (800) 528-4512
CO (800) 528-4512	MI (313) 482-1229	NY (S) (212) 395-7177	VA (800) 638-2720
CT (203) 693-0710	MN (612) 781-1611	OH (N) (216) 331-0900	WA (206) 763-2210
FL (N) (813) 294-5815	MO (816) 358-7272	OH (S) (513) 433-8171	
FL (S) (305) 491-7220	NC (919) 787-5818	OK (918) 936-3631	
GA (404) 945-4222	NJ (N) (800) 645-8016	OR (503) 238-0001	

DATA PRECISION[®]
...years ahead

FOR INFORMATION CIRCLE 68 ON FREE INFORMATION CARD
FOR DEMONSTRATION CIRCLE 7 ON FREE INFORMATION CARD

Go after the best of everything.

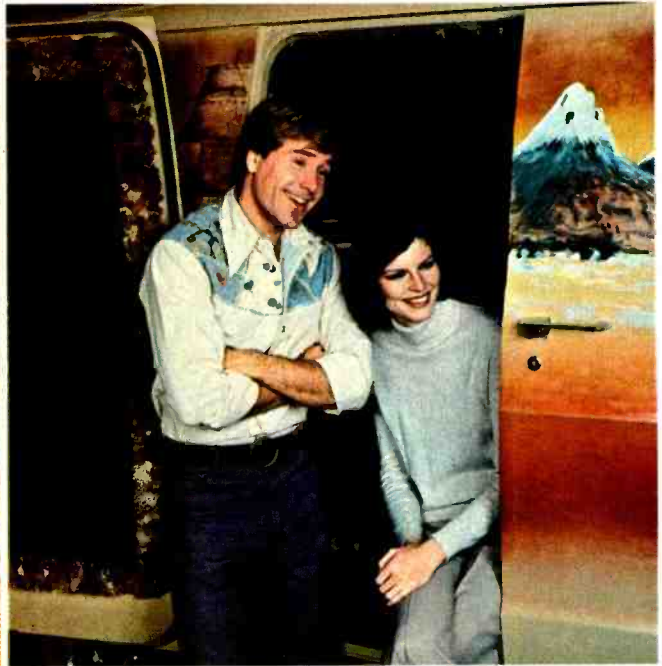

Don't settle for less. Especially when it comes to electronics training... because everything else in your life may depend on it. That's why you ought to pick CIE!

You've probably seen advertisements from other electronics schools. Maybe you think they're all the same. They're not!

CIE is the largest independent home study school in the world that specializes exclusively in electronics.

Meet the Electronics Specialists.

When you pick an electronics school, you're getting ready to invest some time and money. And your whole future depends on the education you get in return.

That's why it makes so much sense to go with number one...with the specialists...with CIE!

There's no such thing as bargain education.

If you talked with some of our graduates, chances are you'd find a lot of them shopped around for their training. Not for the lowest priced but for the best. They pretty much knew what was available when they picked CIE as number one.

We don't promise you the moon. We do promise you a proven way to build valuable career skills. The CIE faculty and staff are dedicated to that. When you graduate, your diploma shows employers you know what you're about. Today, it's pretty hard to put a price on that.

Because we're specialists, we have to stay ahead.

At CIE, we've got a position of leadership to maintain. Here are some of the ways we hang onto it...

Our step-by-step learning includes "hands-on" training.

At CIE, we believe theory is important. And our famous Auto-Programmed® Lessons teach you the principles in logical steps.

But professionals need more than theory. That's why some of our courses train you to use tools of the trade like a 5 MHz triggered-sweep, solid-state oscilloscope you build yourself—and use to practice troubleshooting. Or a beauty of a 19-inch diagonal Zenith solid-state color TV you use to perform actual service operations.

Our specialists offer you personal attention.

Sometimes, you may even have a question about a specific lesson. Fine. Write it down and mail it in. Our experts will answer you promptly in writing. You may even get the specialized knowledge of all the CIE specialists. And the answer you get becomes a part of your permanent reference file. You may find this even better than having a classroom teacher.

Pick the pace that's right for you.

CIE understands people need to learn at their own pace. There's no pressure to keep up...no slow learners hold you back. If you're a beginner, you start with the basics. If you already know some electronics, you move ahead to your own level.

Enjoy the promptness of CIE's "same day" grading cycle.

When we receive your lesson before noon Monday through Saturday, we grade it and mail it back—the same day. You find out quickly how well you're doing!

CIE can prepare you for your FCC License.

For some electronics jobs, you must have your FCC License. For others, employers often consider it a mark in your favor. Either way, it's government-certified proof of your specific knowledge and skills!

More than half of CIE's courses prepare you to pass the government-administered exam. In continuing surveys, nearly 4 out of 5 CIE graduates who take the exam get their Licenses!

For professionals only.

CIE training is not for the hobbyist. It's for people who are willing to roll up their sleeves and go to work...to build a career. The work can be hard, sure. But the benefits are worth it.

Send for more details and a FREE school catalog.

Mail the card today. If it's gone cut out and mail the coupon. You'll get a FREE school catalog plus complete information on independent home study. For your convenience, we'll try to have a CIE representative contact you to answer any questions you may have.

Mail the card or the coupon or write CIE (mentioning name and date of this magazine) at: 1776 East 17th Street, Cleveland, Ohio 44114.



Patterns shown on TV and oscilloscope screens are simulated.



CIE Cleveland Institute of Electronics, Inc.
1776 East 17th Street, Cleveland, Ohio 44114

Accredited Member National Home Study Council


YES... I want the best of everything! Send me my FREE CIE school catalog — including details about troubleshooting courses — plus my FREE package of home study information. RE-15

Print Name _____
 Address _____ Apt. _____
 City _____
 State _____ Zip _____
 Age _____ Phone (area code) _____
 Check box for G. I. Bill information: Veteran Active Duty

MAIL TODAY!

equipment report

Heathkit IT-7400 Digital IC Tester

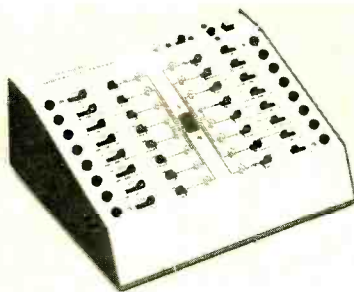

CIRCLE 50 ON FREE INFORMATION CARD

WHEN YOU HAVE TO SERVICE EQUIPMENT THAT contains IC's, it is very convenient to be able to remove a questionable IC from its socket and run an out-of-circuit test. The IT-7400 tests RTL, DTL, TTL, ECL, and CMOS IC's in dual-inline packages with up to 16 pins.

An IC test socket is mounted in the center of the front panel. The user pulls the upper

section of the 16-pin socket up to open the contacts. IC's are then easily inserted, even if their pins are somewhat out of alignment.

Each one of the 16-pins is directly connected to banana jacks that can, in turn, be connected to external equipment or to other jacks on the tester with jumper leads.

Two switches control each IC terminal. One switch has three positions and the other has two positions. Each position of the three-position switch serves one of two functions. The function is selected with the two position switch. For example, the three-position switch will select either 5V, STEP or OFF. However, moving the two-position switch to the other position allows the three-position switch to select either GND, GND or GAS DISC.

When the switches are positioned so the 5-VOLT function is selected, the corresponding IC terminal is connected directly to the power supply. Though labelled 5 volts, the power supply bus can be set to either 3.6 or 5.0 volts by a single switch located at the top of the panel.

The STEP function connects the IC terminal to a bus that originates from a single mercury-wetted pushbutton STEP switch. Mercury-wet-


ted switches do not bounce and debouncing circuitry is unnecessary. The STEP switch is in series with a resistor divider made up of two 100-ohm resistors. Depressing the switch generates a voltage-step equal to half the supply voltage (2.5 or 1.8 volts respectively). All IC pins that you have selected for step function are stepped simultaneously because of their common-bus hookup. Inadvertently selecting the STEP function for an IC output-pin will cause that pin to drive all other pins similarly connected. At times this might be useful to jumper an output to an input without external wiring.

The OFF function disconnects the IC pin from the supply and step buses. However, in all three positions (5V, STEP and OFF), the IC pin is connected through a 22K resistor to the base of an indicator-driver transistor in parallel with a 68K resistor to ground. This is particularly significant when testing CMOS circuits since the resistors effectively hold the pin at ground potential.

Each IC terminal has its own neon indicator driven by a high-voltage indicator driver transistor. This transistor is required to interface
continued on page 24

Great Jumpers are here!

State of the art flat cable connector assemblies . . . at affordable prices.

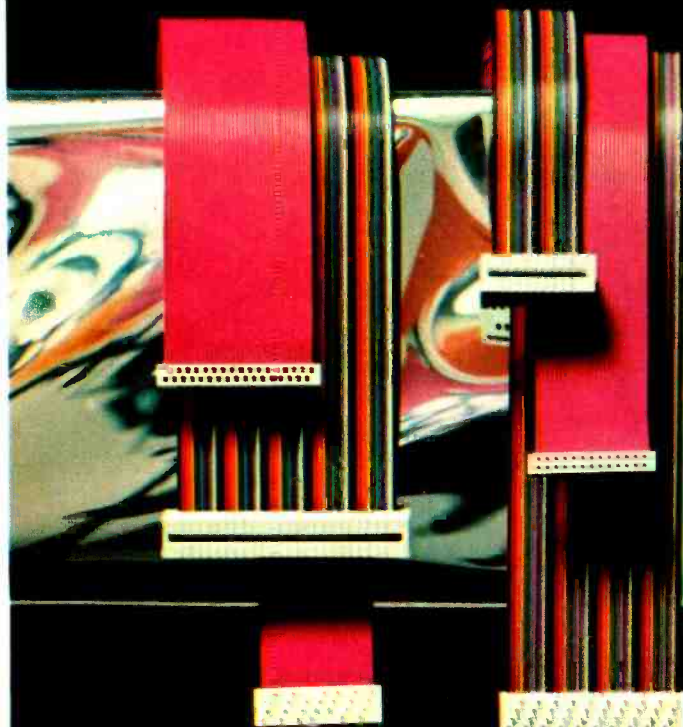

Great Jumpers come to you fully pre-assembled and fully pre-tested. Cable strain reliefs are integral to the molded-on connectors. And we've designed in complete line-by-line probeability with probe access ports behind each contact.

Our connectors are industry standard; two parallel rows of contacts, spaced every .1".

Great Jumpers come in five popular cable widths: 20, 26, 34, 40 and 50 lines wide, and in lengths ranging from 6" to 36".

Available now at the distributor near you who carries the AP Products Faster and Easier Line.

Our distributor list is growing daily. For the name of the distributor nearest you call Toll-Free 800-321-9668.

Send for our complete AP catalog, the Faster and Easier Book.

Faster and easier is what we're all about.



AP PRODUCTS INCORPORATED

Box 110-72 Corwin Drive, Painesville, Ohio 44077
(216) 354-2101 TWX: 810-425-2250

CIRCLE 5 ON FREE INFORMATION CARD



We've got the longest running feature on TV.

Our Color Bright 85[®] picture tube warranty is the longest in the industry. We can offer it because we're confident that a Color Bright 85 picture tube will probably last longer than five years.

The warranty is a great selling tool that builds customer confidence in your quality work. Plus, it lets you form a long-term customer relationship with each picture tube you replace.

[®]Limited warranty, naturally. It does not cover labor for replacing a tube.

The Color Bright 85 picture tube offers economy with the high quality standards you expect from Sylvania. Couple that with the new 5-year warranty* and you'll find the Color Bright 85 is an easy sale.

And it can be better for you in the long run.

GTE SYLVANIA

EQUIPMENT REPORT
continued from page 22

the low-voltage IC's being tested to the high-voltage neon indicator.

When the two-position switch is slid into its other position, the three-position switch can select the GND, GND or GAS DISC functions. When the GAS DISC function is selected, the driver transistor is cut off and the neon indicator is connected directly to the IC terminal for testing high-voltage IC's such as gas-discharge drivers. The two redundant GND functions ground both the IC terminal and the banana jack.

The user must be thoroughly familiar with the operation of the two slide-switches. Positioning both switches so that the GAS DISC function is selected will place up to 60 volts on the IC terminal. **This can cause permanent damage to a low-voltage IC. Heath's recommended procedure is to move the three-position switch before the two-position one.**

The *IT-7400* power supply contains an isolation transformer for safety purposes. The primary can be connected so 120- or 240-volt AC power sources can be used. One secondary winding feeds a voltage doubler and $\mu A7805$ regulator to produce the 5 volts that supplies power, the step switch and the high logic-levels to the IC under test. Regulation holds the voltage to $\pm 5\%$ at currents under 300 mA.

The testing procedure is simple and obsolescence proof. Signals are applied to exercise the functions of the IC that are described in the data sheet associated with the IC. To check a simple gate, the various input combinations

are applied and the outputs checked against the truth table.

Counters are checked by connecting the appropriate pins to ground and the power supply, and then stepping the counter input while observing the state of the various output terminals.

The *IT-7400* cannot precisely check specification limits because such things as rise and fall times and input and output levels are not adjustable or metered. But the *IT-7400* adequately verifies that the circuit is capable of its basic functions. If a circuit problem relates to speed such as the frequency at which a counter is clocked, more sophisticated (and expensive) testing is called for.

Used along with digital texts, the Heathkit *IT-7400* makes an excellent learning tool and remains useful later in its intended role as a tester.

Power consumption of the *IT-7400* is 10 watts and the unit weighs 4.5 lbs. An SN7400 quad NAND gate (TTL) is provided for initial familiarization.

Hickok model 388 CB In-Line Tester

CB-TRANSMITTER TESTING CAN BE VERY TOUGH or very easy. This depends on the test instruments. Hickok Electrical Instrument Co. has come out with a CB-test unit that can make some previously hard tests look very easy. This is the *model 388* In-Line CB Tester. Connect the *model 388* to the CB transmitter, connect a 50-ohm dummy load or the CB antenna to

the other jack, turn it on, push the button and there you are.

You can read the four most important things about a CB transmitter instantly: Operating frequency on a seven-digit LED display, down to ± 10 Hz; RF output power on two ranges, 10 or 100 watts; voltage standing-wave ratio (VSWR) and the modulation percentage. All you have to do is set the FUNCTION switch and push the transmitter button.




CIRCLE 98 ON FREE INFORMATION CARD

Frequency is read out on a 7-digit display. The *model 388* has an ECL oscillator timebase with an accuracy of \pm one count \pm the timebase accuracy which is 10 parts-per-million (PPM). A version of the *model 388—model 388X*—is identical but has a temperature-compensated crystal oscillator (TCXO) accurate to within 1 PPM. RF output power is read out on a 3-digit display. (Same display, of course, but only the three right-hand digits are *continued on page 26*

Error-free Counting

with automatic signal attenuation to eliminate counts due to noise and interference.

Variable input attenuation reduces the signal to a value just above the trigger window, thereby eliminating false counts.



Accuracy is achieved by a unique PIN-DIODE attenuator circuit with 2dB dynamic range and optimum triggering to 12 Vrms. High sensitivity and continuous attenuation allows error-free counting of AM and mixed signals. The Philips PM6610 series counter/timers, in rugged metal cases, include high stability timebases, internal battery, analog output, and many other options. Starting at \$750.00 for the 80 MHz model, the PM6610 series counters include 250, 520 and 1000 MHz units.

Want more information or a demonstration? Call our toll-free Hotline number: 800 631-7172 (New Jersey residents call collect 201 529-3800) or contact:

Philips Test & Measuring Instruments, Inc.
A NORTH AMERICAN PHILIPS COMPANY

In the United States
85 McKee Drive
Mahwah, New Jersey 07430
(201) 529-3800

In Canada
Ontario Canada



PHILIPS

CIRCLE 26 ON FREE INFORMATION CARD



A Platt tool case won't fall apart at the seams because there are no seams.

Unlike other tool cases, the pockets on a Platt Pallet are molded without any seams, stitches or rivets to form a one-piece unit. It's practically indestructible.

The case itself has that same rugged construction. It comes in either tough, lightweight ABS Thermoplastic, rich looking expanded vinyl or a combination of both.

Platt also has rugged hardware. Like an aluminum rim for extra strength. Steel core handles. And tough brass locks.

Inside there are compartments for larger tools, parts boxes and testing equipment. And multiple lid pockets for paper and order books.

Besides having a tough case Platt has a tough 5-year guarantee on both the case and pallet.

* Pat. No. 3,880,285

Cases for business and industry.


2301 S. Prairie Ave., Chicago, Ill. 60616 (312) 225-6670

platt

CIRCLE 45 ON FREE INFORMATION CARD

THE SOLDERING IRON VS. THE PROTO-BOARD.[®]

(IT'S NO CONTEST.)

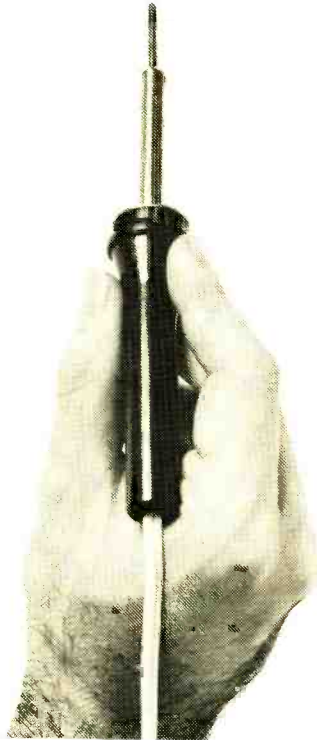


The Soldering Iron

If you're still designing and testing breadboard circuits the conventional way, you're doing a lot of extra work, and getting a lot of grief in return. You've got to think as much about manual labor as you do about the circuit. Maybe even more.

Every time you add a component, there are 2 or more connections to make... over a dozen with most IC's, while watching out for overheating components and cold solder joints. And that's only half the problem.

The other half is when you want to change components or connections. Even with good desoldering equipment, you can still have a hassle on your hands. (Ever try to desolder a temperature-sensitive 14-pin DIP on a component-filled board?)

Solder. Desolder. Resolder.
Desolder: Now there's a better way...

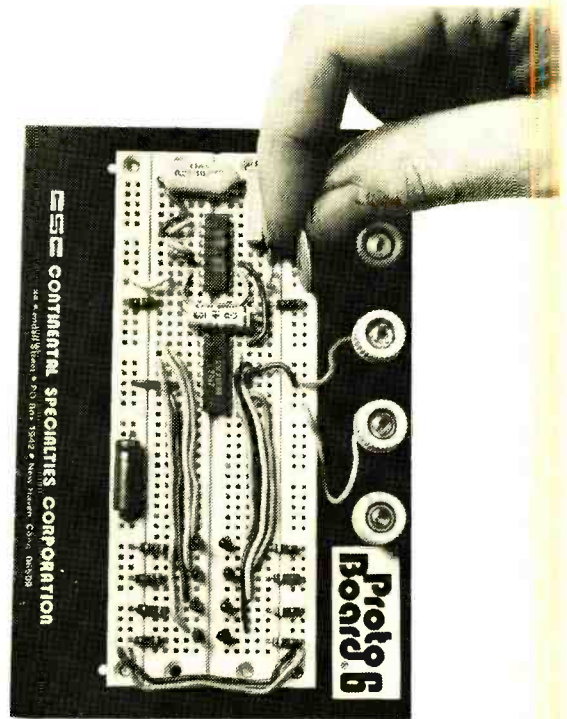

The Proto-Board

With the CSC Proto-Board breadboarding system, connecting components is as simple as pushing a lead into a hole. Rugged 5-point contacts insure low-resistance connections, and where jumpers are needed, components are interconnected with standard #22 AWG solid wire.

That's all there is to it.

You can choose Proto-Boards with anywhere from 630 to 3060 solderless tie-points.

Proto-Boards with or without regulated power supplies. Even assemble your own, with the same solderless QT sockets and Bus Strips,* for smaller (or larger) capacity. However you do it, you'll save time... money... aggravation... on every circuit.

For more information, see your CSC dealer or distributor... or contact us for our catalog and distributor list.

CONTINENTAL SPECIALTIES CORPORATION



Continental Specialties Corp., 44 Kendall Street, Box 1942, New Haven, CT 06509 • 203-624-3103 TWX: 710-465-1227
West Coast Office: 351 California St., San Francisco, CA 94104 • 415-421-8872 TWX: 910-372-7992
Canada: Len Finkler Ltd., Ontario Mexico: ELPRO, S.A., Mexico City 5-23-30-04

EQUIPMENT REPORT

continued from page 24

lit to avoid confusion.) On the 10-watt range, the display reads "00.0". On the 100-watt range, the display reads "000." The readout has a resolution of 0.1 watt.

VSWR is displayed with four digits—same reason VSWR's of up to 10:1 can be read. (But if you see a reading of about 5:1, let go of the button, quick. Something definitely needs fixing in the transmitter or antenna. Running a transmitter more than a few seconds with such a high reflected power level can blow up the final RF transistors.)

Modulation percentage is read out on a 3-digit display. This can read from 0 percent to

110 percent. (More than 110 percent indicates trouble, too.) By the way, you must use an undistorted sinewave signal for the modulation. If it is distorted, the harmonics will cause inaccuracies and a bouncing count. A voice signal won't do, of course. In this area, before we go, remember that when you're reading the frequency, the transmitter *must* be unmodulated—with one exception, which we'll get to. If there is modulation, the frequency counter will try to read the sideband frequencies and skip counts. This is normal. These instruments will work with the new 40-channel sets, of course.

All of these goodies are accomplished by state-of-the-art IC technology. They can do some cute tricks. The *model 388* has two coaxial jacks on the back panel; one INPUT, the

other OUTPUT. All you need is a short coaxial cable with a PL-259 (sometimes called a UHF plug) on each end, to hook the CB-antenna output to the INPUT connector. An accurate 50-ohm dummy load must be connected to the OUTPUT—the set's own antenna may be used. Do not key the transmitter without one of the loads hooked up. This can damage the transmitter, especially if the transmitter is a solid-state type.

You'll find a BNC jack on the back of the *model 388*, along with a TIMEBASE slide switch. With the switch in the INTERNAL position, it runs on its own built-in timebase. The *model 388X* doesn't have the switch, but does have the jack. The TCXO timebase of the *model 388X* may be used for greater accuracy, by connecting it through a jumper cable to a *model 388* set on External timebase. In fact, several *model 388's* may be timed from only one *model 388X*, if desired. You can do a trick with the *model 388*: If you want to hold the display for any reason, just slide the switch to EXTERNAL while the transmitter is keyed. The display will freeze and hold until the instrument is turned off or the switch set back to INTERNAL timebase.

The *model 388's* can be used as a straight frequency meter. There is a BNC jack on the front panel for this, with a high-impedance (1.0 megohm) input and a sensitivity of 100 mV. A push-push selector switch lets you choose front panel operation of the frequency meter or the in-line operation from the back-panel jacks. The modulating signal can be checked on a scope connected to the AM MONITOR jack on the left side. This displays the detected AM modulation and may be used to check for possible clipping, distortion, etc.

The exception we mentioned, about not using modulated signals for frequency readings, is in the testing of single-sideband CB transmitters. These have *no* RF power output at all *without* modulation. Here again, an accurate 1-kHz audio signal is needed. Set the transmitter switch to UPPER SIDEBAND and key it. The display will read out the carrier frequency plus the modulating frequency. Setting to LOWER SIDEBAND reads the carrier minus modulating frequency. VSWR can be read on SSB systems with the same ease. RF power measurements must be corrected by a formula given in the instruction manual, for SSB *only*.

Percentage of modulation is read in somewhat the same way. One circuit reads the peaks and another reads the average value of the modulation envelope after detection in a special two-step circuit. More math, and there you are.

The timebase accuracy of the *model 388* may be checked by comparing it to the 10-MHz signal from WWV or to a frequency standard. If it needs correction, an adjustment is provided to make the display read exactly 10.00000 MHz and there you are. The aging rate of the *model 388* is given as 5 PPM-per-year, and the *model 388X* as 1 PPM-per-year. The "setability" is given as "to ± 0.1 ppm," for both units. For this adjustment, the instrument must be warmed up for 30 minutes to allow all parts to reach normal operating temperature, which is 25°C.

Both models are powered from the 120-volt AC line. All of the DC power supplies are stabilized by several solid-state voltage regulators. If you want to use them in cars, etc., it is easy to hook up a connection to the power supply so that they can be used from any 12-14 volt DC-supply. **R-E**



sound and safe



CB Hump Mount Speaker.

Eliminates CB installation problems. Any transceiver mounts on the Kamel speaker, speaker mounts on the hump, fits snugly when driving. CB dials easy to see, easy to reach. For safer operation. To remove, just unplug antenna and power leads, lift entire unit and place in trunk for maximum security. No screws to unscrew. No

hassle. Acoustically designed speaker deadens static and channel noise, eliminates voice distortion. We make having an expensive CB rig in your vehicle safe and worthwhile. Isn't it about time somebody did?

Kriket Care



Acoustic Fiber Sound Systems, Inc.
Indianapolis, Indiana

All afs®/KRIKET® products are manufactured in the U.S.A.
Copyright 1977. Acoustic Fiber Sound Systems, Inc.

equipment reports

Infinite UC1800 Microcomputer



CIRCLE 78 ON FREE INFORMATION CARD

INFINITE, INC. TAKES TWO DIFFERENT APPROACHES to the microcomputer learning/development system. First, they produce a training-and-use package that leads the uninitiated unflinchingly into the world of the computer. For example, their *model UC1800* microcomputer is a completely assembled and self-contained microcomputer system. It avoids construction pitfalls and the futile troubleshooting that often follows. To determine whether a problem is in the microprocessor IC or elsewhere can be very difficult without the necessary skill and sophisticated equipment.

On the other hand, Infinite has also developed the *model UC1800HK Hobbyist Kit* for the experienced kit builder. The kit contains only special components that are not widely available.

The *UC1800* is a completely assembled microcomputer system built around the RCA COSMAC *model CDP1802* microprocessor. Four printed-circuit boards are mounted in a console-type cabinet that resembles a desk-type calculator.

The central processor board holds the CPU IC, the CPU control logic, 256 words of NMOS RAM and the 5-volt power supply (except the power transformer mounted separately in the cabinet). The CPU board has a 72-pin gold-plated edge connector for system expansion.

The readout board has four 7-segment LED displays and the associated decoder-driver IC's. Two displays function as the address readout, and the other two as the instruction and input/output readouts. The LED's display the hexadecimal (base 16) representation of the computer's binary numbers. After 0 through 9, A, C, E and F are displayed and "b" and "d", using the available segments. The board contains its own 5-volt regulator IC to supply the substantial 400-mA current drain.

The third board is the switch-control module that interfaces with the six control switches. They are RESET, SINGLE STEP, START/EF1, POWER, MODE and SINGLE STEP/ENTER.

The board has outputs that connect to the EF1, CLR, WAIT, and DMA IN terminals on the microprocessor IC.

The keyboard module holds the 16 hexadecimal keys and the necessary debouncing and decoding components. Two LED's indicate whether the most or least significant of the two hex digits in each word is ready for loading.

To load a program, set the MODE switch to LOAD, then RESET, enter the first word, press ENTER and continue. The loading starts at 00 and proceeds sequentially. If you make a mistake along the way, you must either start all over or enter a short program that allows you to change a particular memory location.

After the program is loaded, the MODE switch is then placed in the RUN position and the SINGLE STEP switch can be turned either ON or OFF. With the switch OFF, the computer executes the program automatically. With the switch ON, the computer executes a single instruction for each push of the SINGLE STEP/ENTER button.

The START switch shares the EF1 input function that you can use to interact with your program. Input and output instructions permit you to enter data from the keyboard and readout into the two LED's.

The POWER switch maintains power to the memory only in the STANDBY position to preserve the program with minimum power consumption. You can also purchase a nickel-cadmium battery and charger to keep the memory alive for about four hours after loss of primary AC power.

The DMA (Direct Memory Access) design of the *model CDP1802* facilitates program loading without using a ROM utility program. There is an advantage in not requiring this extra component, but it does make the system cumbersome to use.

Infinite addresses this problem by including a listing and instruction for using KEYBUG as part of the *UC1800* package. This program takes one-half of the available 256 memory words, and of course it must be successfully loaded starting at address 00.

KEYBUG has five commands that help in loading, examining and changing memory contents. After the program is loaded, a RESET-START sequence gives control to KEYBUG, which is acknowledged by displaying "db" (debug).

The DC command will display the contents of a single memory location. Press the D and the C followed by EF1, which serves to enter the command. Then key in the address of the location to be displayed and press EF1 again. The program responds by displaying the memory contents. The CC command changes the contents of memory. After the command and

continued on page 32

15MHz Triggered Sweep Dual Trace Scope Usable to 30 MHz



B & K-PRECISION MODEL 1472C \$720 INCLUDING PROBES

Normally rated at 15MHz (-3dB), it easily syncs and displays a 30MHz signal with sure triggering.

- Automatically selects chopped or alternate trace display
- Maintains calibration accuracy over 105-130VAC range.
- 11 sensitivity ranges, 10mV to 20V/cm.
- 19 sweep ranges, 0.5μSEC to 0.5SEC/cm.
- 24nSEC rise time.
- Front panel X-Y operation with matched phase-shift and sensitivity inputs.
- P31 blue phosphor
- Algebraic addition and subtraction

Available from your distributor.

BK PRECISION

DYNASCAN CORPORATION


6460 West Cortland Avenue
Chicago, Illinois 60635 • 312/889-9087

In Canada: Atlas Electronics, Ontario
Int'l. Sls: Empire Exp., 270 Newtown Rd., Plainville, CT 06061


CIRCLE 76 ON FREE INFORMATION CARD

The better the training the better you'll

Send for
FREE
illustrated
career
guide

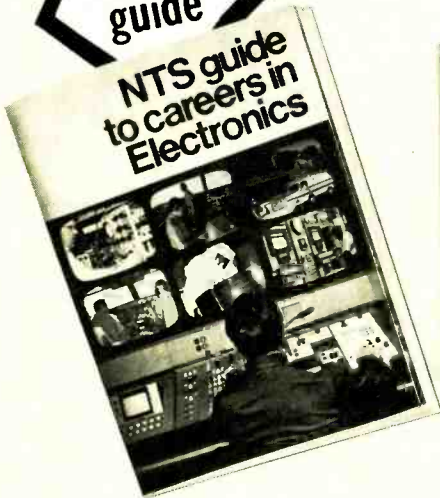


COMPU-TRAINER

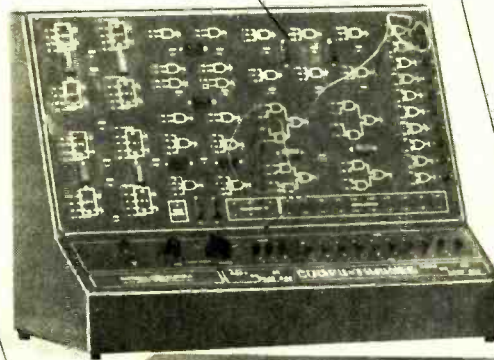


IN-CIRCUIT TRANSISTOR TESTER

TROUBLESHOOTER
VOM



SOLID-STATE
OSCILLOSCOPE

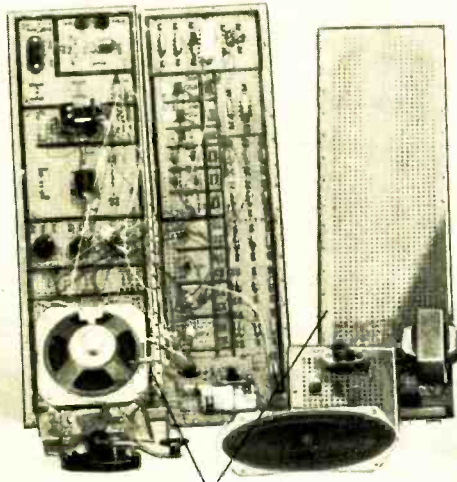

ELECTRO-LAB



(Simulated TV Reception)

As an NTS student you'll acquire the know-how that comes with first-hand training on NTS professional equipment. **Equipment you'll build and keep.** Our courses include equipment like the **NTS/Heath GR-2001 computerized color TV (25" diagonal)** with varactor diode tuning and digital read-out channel selection; (optional programming capability and digital clock avail.).

Also pictured above are other units — 5" solid state oscilloscope, vector monitor scope, solid-state stereo AM-FM receiver with twin speakers, digital multimeter, and more. It's the kind of better equipment that gets you better equipped for the electronics industry.


This electronic gear is not only designed for training; it's field-type — like you'll meet on the job, or when you're making service calls. And with NTS easy-to-read, profusely illustrated lessons you learn the theory behind these tools of the trade.

Choose from 12 NTS courses covering a wide range of fields in electronics, each complete with equipment, lessons, and manuals to make your training more practical and interesting.

Compare our training; compare our lower tuition. We employ no salesmen, pay no commissions. You receive all home-study information by mail only. All Kits, lessons, and experiments are described in full color. Most liberal refund policy and cancella-

and the equipment be equipped.

COMPARE OUR
KITS AND LESSONS.
COMPARE OUR
TUITION.

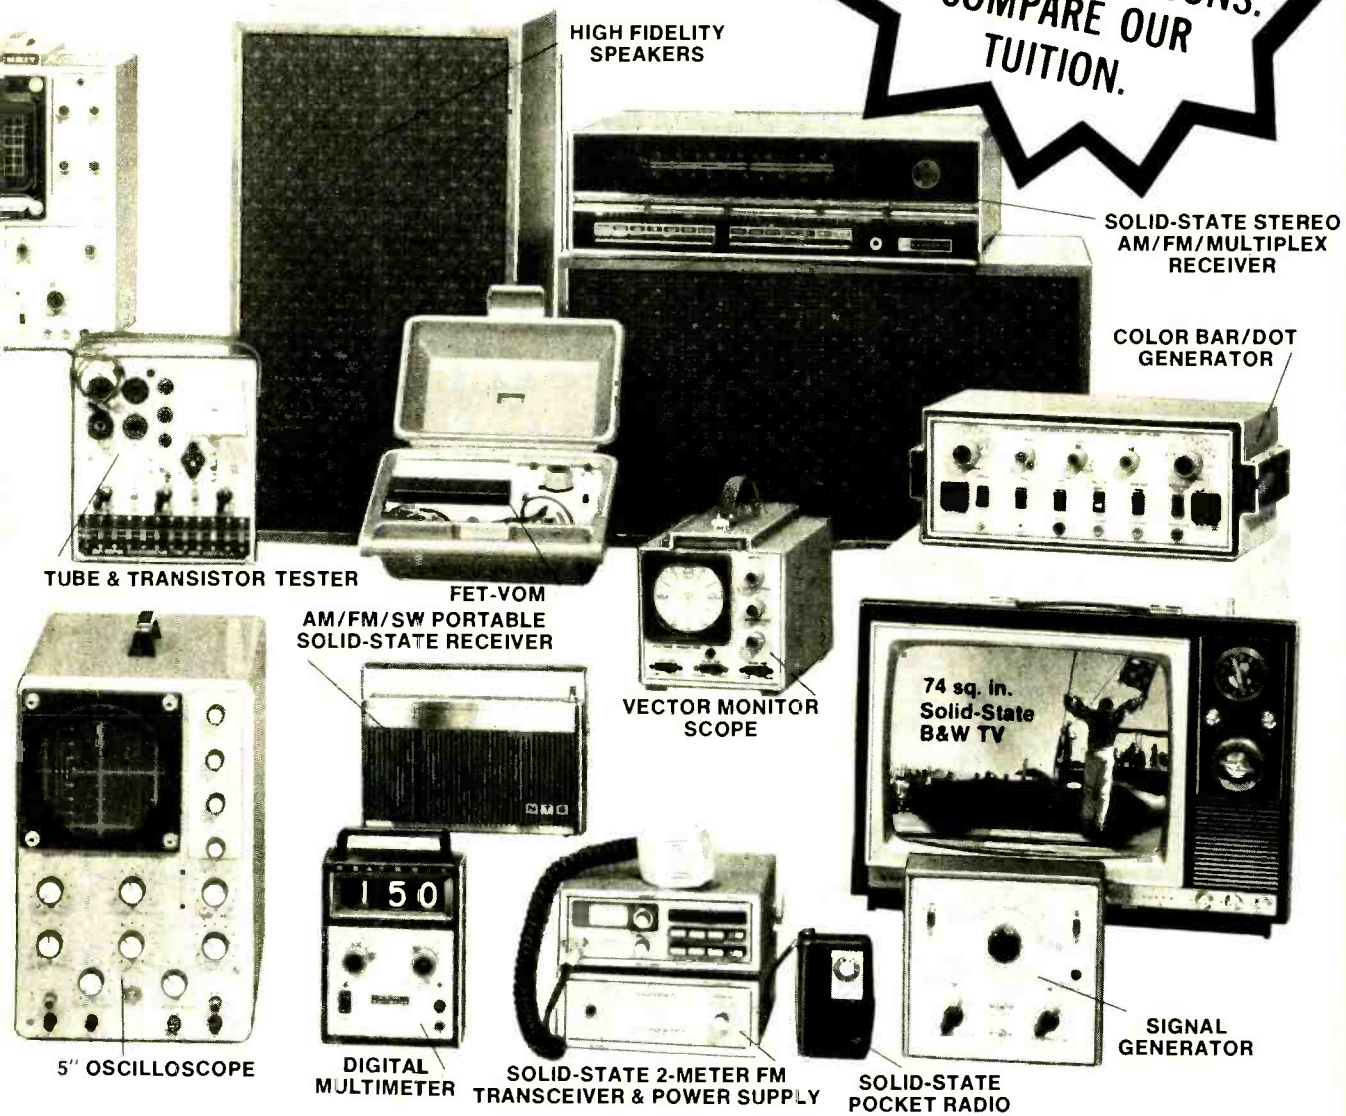

tion privileges spelled out. Make your own comparisons, your own decision. Mail card today, or clip coupon if card is missing.

NO OBLIGATION. NO SALESMAN WILL CALL

APPROVED FOR VETERAN TRAINING

Get facts on new 2-year extension

NATIONAL TECHNICAL SCHOOLS

TECHNICAL-TRADE TRAINING SINCE 1905
Resident and Home-Study Schools
4000 So. Figueroa St., Los Angeles, Calif. 90037

NATIONAL TECHNICAL SCHOOLS Dept. 206-087
4000 South Figueroa St., Los Angeles, Calif. 90037
Please send FREE Color Catalog and Sample Lesson.
NO OBLIGATION. NO SALESMAN WILL CALL.

Color TV Servicing
 B & W TV and Radio Servicing
 Electronic Communications
 FCC License Course

Electronics Technology
 Computer Electronics
 Basic Electronics
 Audio Electronics Servicing

NAME _____ AGE _____

ADDRESS _____ APT # _____

CITY _____ STATE _____

Please fill in Zip Code for fast service _____

Check if interested in G.I. Bill information.
 Check if interested ONLY in classroom training in Los Angeles.

EQUIPMENT REPORT
continued from page 27

the memory-location address are entered, the new contents are keyed in and EFL depressed. Since only a single memory location is accessed by the DC and CC commands, the system can return to KEYBUG automatically and be ready for a new command.

To examine a series of memory locations without entering memory addresses sequentially use the FD (forward display) command. The computer displays the address and its contents; then increments the address and displays its contents each time EFL is pressed. Similarly, the FC forward change command sequentially loads the memory by pressing the EFL switch after each data entry. These last two commands are self-looping; the only way to exit the loop so that a new command can be executed is to reset and restart KEYBUG.

The remaining command is EE for execute. The EE command is keyed in, EFL pressed, the program-starting address entered and EFL pushed again. Because KEYBUG starts at 00 and a program cannot be written there, EE is the only way to activate a program.

To debug your program, set breakpoints by inserting a branch to 00; this causes a "db" readout when KEYBUG is reached. You can then examine memory to see what has taken place so far. A more sophisticated approach would be to examine the processor registers when the breakpoint is reached, restarting the program and continuing to the next breakpoint.

So far KEYBUG is not available on PROM or

ROM and must be loaded manually into RAM. A defective user program may destroy the utility program. This happened several times while I was experimenting with some simple programs. Some wipeouts did not completely annihilate the system, and it was possible to use KEYBUG to find the destroyed memory locations and restore the full capabilities. Some wipeouts were total.

The Infinite computer is available in four versions:

The completely assembled and documented UC1800 package includes computer, instruction manual, RCA MPM-201A CDP1802 Users Manual, KEYBUG program and Cardiac. Cardiac (Cardboard Illustrative Aid to Computation) was developed by Bell Telephone Laboratories to simulate the operation of a simple computer. Cardboard slides simulate the instruction decoding, and calculation is done with pencil and paper. The package is priced at \$495, plus \$8 for shipping and handling. Option 001 is the battery backup and recharger and sells for \$22.50. Option 002 enables you to use the microcomputer with either 120 or 230 VAC 50-500-Hz input power and costs \$15.

The UC1800 kit includes everything but the cabinet and power cord. The four modules are factory-assembled and burned-in. This version sells for \$389, plus \$4 for shipping and handling.


The economy model (model UC1800HK) contains four unwired boards, keyboard, 1802 CPU, readouts, cable and Users Manual. It is priced at \$129.95, plus \$2 for shipping and handling. If you already have a CDP 1802, Option 003 subtracts \$18 from the price.

The last version is just the assembled CPU board, which also supplies 500 mA of current for other system components. The UC30001 OEM UC1800 CPU Module costs \$179, plus \$2 for shipping and handling.

For additional details write to Infinite Incorporated, 151 Center St., Cape Canaveral, FL 32931

R-E

Oneida Model 90A Picture Tube Restorer

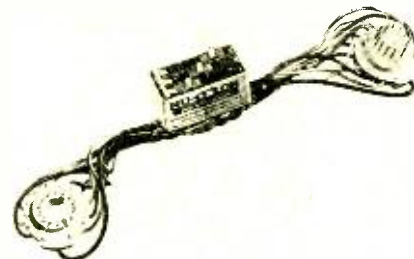

CIRCLE 79 ON FREE INFORMATION CARD

ALL THINGS COME TO HIM WHO WAITS. I HAD TO wait for quite a while, but I finally found just the thing I needed: A new device, made by Oneida Electronic Manufacturing Company. This is their model 90A Nu-Color picture tube restorer. This device is designed to restore color to old picture tubes with one or more weak guns.

I had a trade-in Wards TV, with a picture tube so bad it had to be seen to be believed. The blue gun read almost normal emission; the

continued on page 73

Treat yourself to a new direct reading DVM today.



DVM35
POCKET PORTABLE
ANALOG REPLACEMENT
3-digit, 1% DCV,
Battery or AC
Only \$134



DVM36
LAB ACCURATE
POCKET PORTABLE
3½ digit, .5% DCV,
Battery or AC
Only \$158



DVM32
BENCH & FIELD MASTER
3½ digit, .5% DCV,
Battery or AC
Only \$198




DVM38
"PRIME" STANDARD
AT YOUR FINGERTIPS
3½ digit, .1% DCV,
Auto-Ranging
Only \$348

A COMPLETE LINE OF DVMs TO FILL YOUR EVERY NEED OR WANT.

You can be sure more times in more circuits, under more adverse conditions, with greater versatility, accuracy, and meter protection than any other digital multimeters on the market today; and for less money too. 10 Day Free Trial: Try any of these famous DVMs for 10 days. If the DVMs in use don't prove exactly what we say, return them to your Sencore FLPD Distributor.

Want more information? We would like to tell you all about the Sencore DVMs by sending you a 24-page Sencore News, a six-page brochure, and the name of your nearest Sencore Distributor today ... simply write or circle reader's service number.



SENCORE


CIRCLE 4 ON FREE INFORMATION CARD

3200 Sencore Drive, Sioux Falls, SD 57107

Build this Video Modulator

Permits direct connection of composite video signals from video games and microcomputers to the antenna terminals of your TV set

GLEN DASH

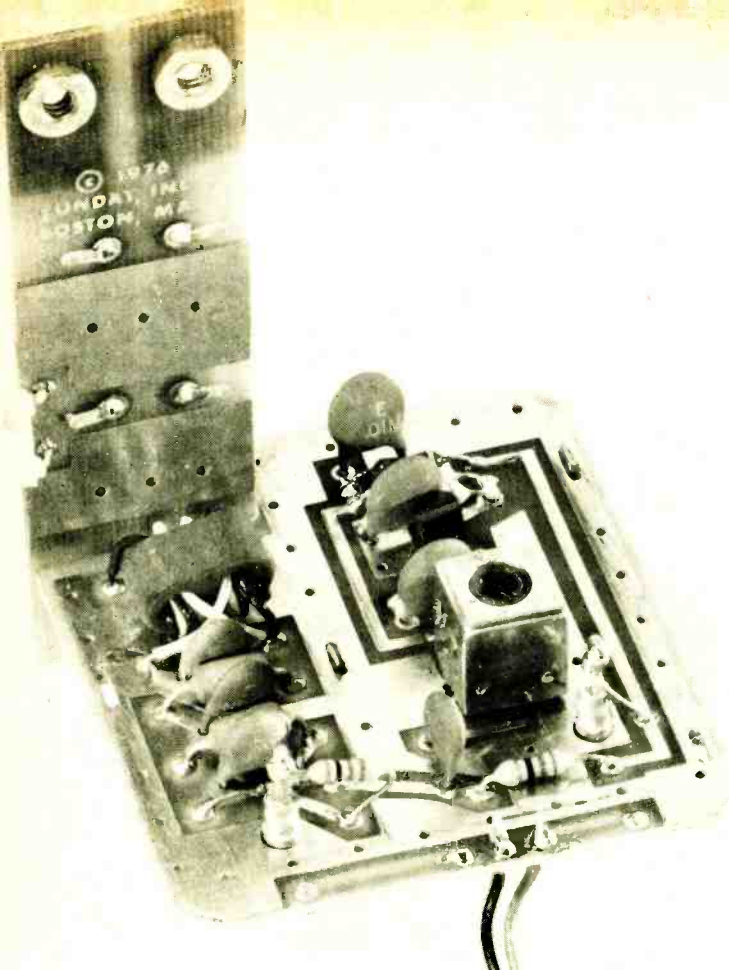

WITH THE ADVENT OF VIDEO GAMES AND the home computer, the ordinary television set is becoming an increasing source of interest for the hobbyist. A TV set can be quickly and safely converted for use as a display monitor using a device known as the Videocube. Basically, the device takes a composite video signal, such as the output of a TV game circuit or the 2650-based microcomputer system (*Radio-Electronics*, April 1977) and feeds a modulated Channel 3 or 4 RF-signal to the antenna terminals of the television receiver.

If we didn't have an RF oscillator/modulator such as the Videocube, the TV set could only be used as a monitor by directly wiring into its video circuit. However, finding the right point to feed in the microcomputer or TV game output often isn't easy, and most TV sets today (especially portables) are not line-isolated, which can lead to safety hazards. Also, poorly designed RF sections will radiate their signal to nearby television receivers and interfere with commercial broadcasts. The Videocube avoids these problems and offers a versatile design that can easily interface to almost any video source.

The Videocube has a 300-ohm output (the type most often used on TV receivers), a selector switch for switching between normal TV viewing and the Videocube's output, and a 3-wire input (5-12-volt power, video input and ground). The Videocube consists of an

oscillator that can be tuned to Channel 3 or Channel 4, a modulation section for amplitude modulation of the RF signal from the oscillator, and an output filter for removing spurious harmonics from the signal.

NOTE

The Federal Communications Commission requires that any device to be marketed using a commercial TV receiver as its output must have FCC type approval. Use of the Videocube or other RF device does not automatically entitle a manufacturer to FCC approval.

How it works

The schematic diagram of the Videocube is shown in Fig. 1. Transistor Q1 is used in a Hartley oscillator circuit in which tunable coil L1 and capacitor C4 set the carrier frequency. Feedback to the emitter is provided by capacitor C3. Resistor R3 biases the transistor, as do resistors R1 and R2. The base of the transistor is grounded by C2 for high-frequency signals, making this a grounded base configuration. A filter that prevents RF from getting into the power supply is provided and is comprised of capacitors C1, C5 and resistor R4.

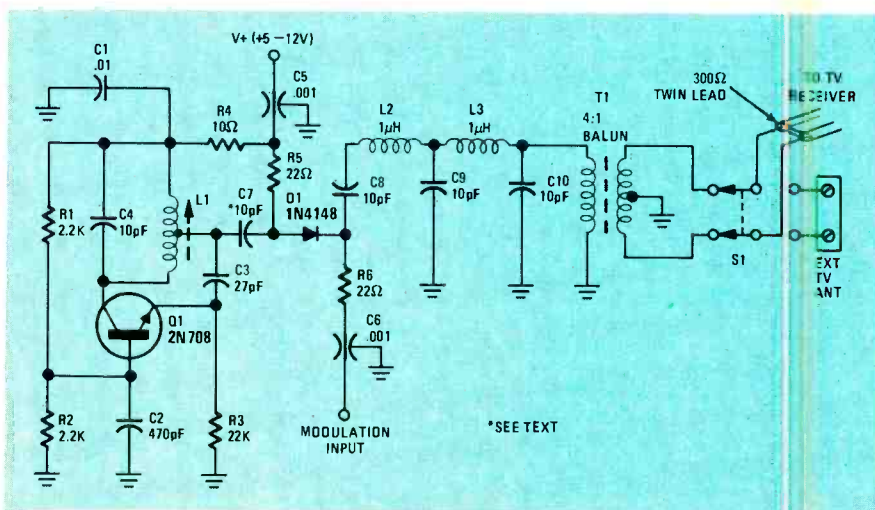


FIG. 1—OUTPUT SIGNAL LEVEL of Videocube is controlled by the modulation input.

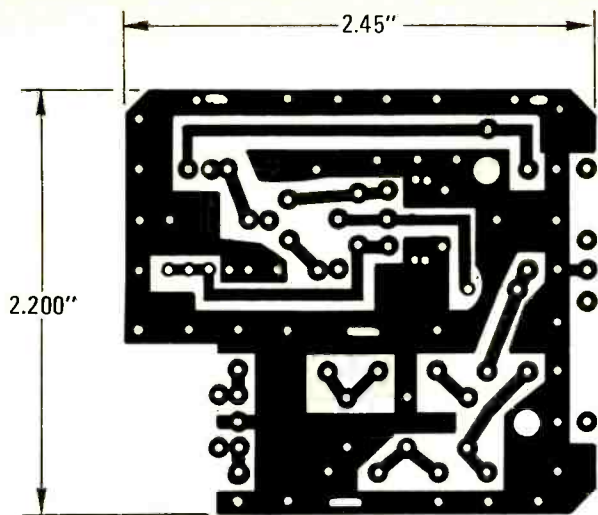


FIG. 2—FOIL PATTERN of component side of double-sided main board shown actual size.

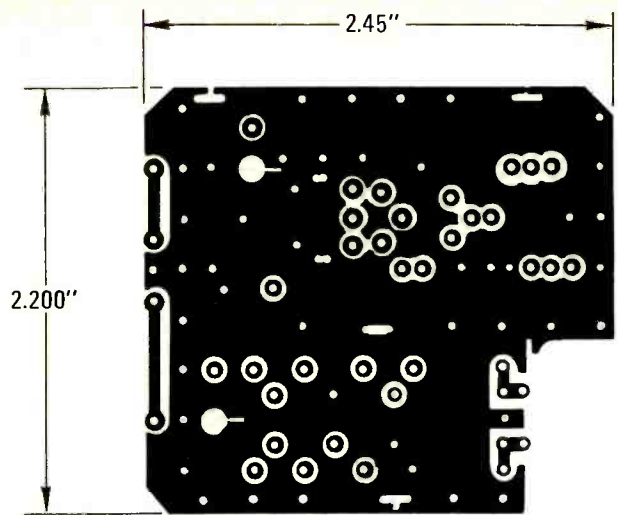


FIG. 3—FOIL PATTERN of bottom side of double-sided main board shown actual size.

The circuit uses an unusual technique for modulating the output. Capacitor C7 and resistor R5 form a voltage divider that provides about a 25-mV signal at the anode of diode D1. Since capacitor C6 (0.001 μ F) is so large (its impedance is 2.6 ohms at 60 MHz), it appears as a short circuit to ground for RF signals coming from the RF oscillator. Therefore, diode D1 and resistor R6 act as a voltage divider. The forward resistance of D1, however, is a function of the current through D1, and it decreases as the current increases. Because of this, as the resistance from the modulation input to ground decreases, the current through D1 increases and the signal level at the cathode of D1 increases.

The signal at the cathode of D1 is fed to a filter network consisting of capaci-

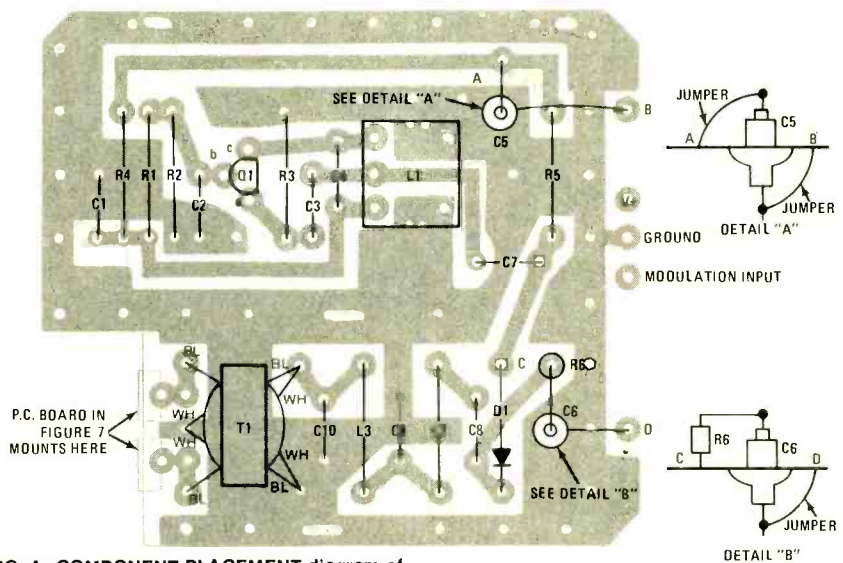


FIG. 4—COMPONENT PLACEMENT diagram of main PC board.

PARTS LIST

All resistors are $\frac{1}{4}$ watt, 10% unless otherwise noted.

- R1, R2—2200 ohms
- R3—22,000 ohms
- R4—10 ohms
- R5, R6—22 ohms
- C1—0.01 μ F, 20%, 25-volt ceramic disc
- C2—470 pF, 20%, 25-volt ceramic disc
- C3—27 pF, 5%, 25-volt ceramic disc
- C4, C7-C10—10 pF, 5%, 25-volt ceramic disc
- C5, C6—1000 pF, 20%, feedthru
- D1—1N4148
- Q1—2N708
- L1—Condat type-L1 oscillator coil (see text)
- L2, L3—1 μ H RF
- T1—75:300 ohm Balun
- S1—UID type, DPDT, 60-dB isolation

The following parts are available from Delta Electronics, Box 2, Amesbury, MA 01913.

A partial kit of parts, including S1, C5, C6, Q1, L1, L2, L3, T1, both PC boards, shields and case, for \$9.95.

A complete kit of parts for \$13.95. Massachusetts residents add state and local sales taxes as applicable.

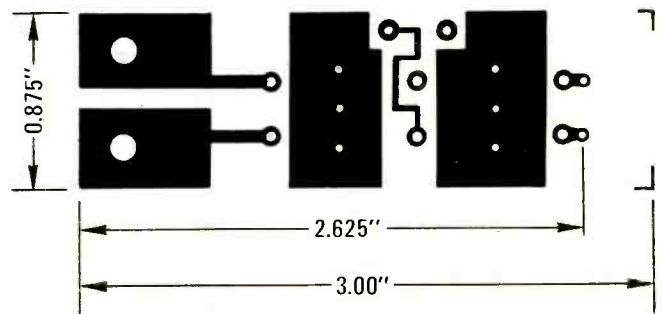


FIG. 5—FOIL PATTERN of top of double-sided switch board shown actual size.

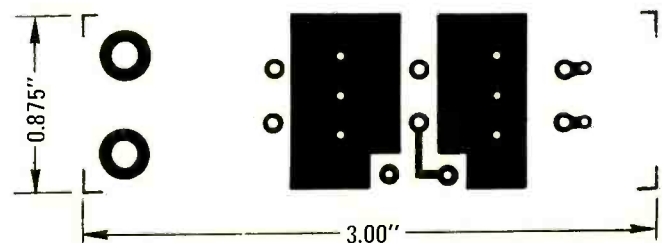


FIG. 6—FOIL PATTERN of bottom of double-sided switch PC board shown actual size.

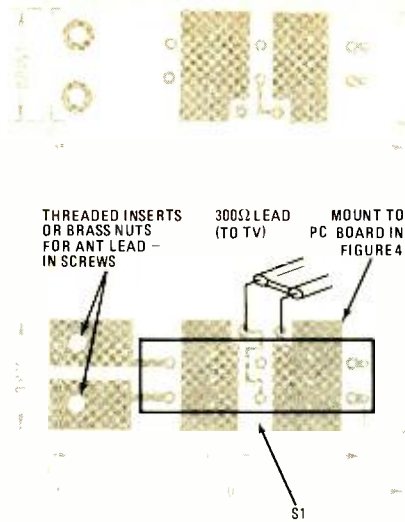


FIG. 7—COMPONENT PLACEMENT diagram of switch PC board.

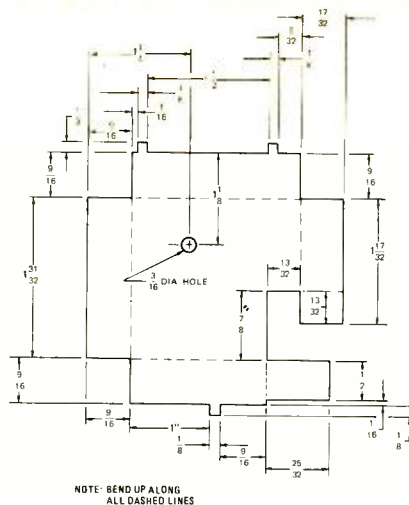


FIG. 8—TOP RF SHIELD is cut from sheet metal and soldered to component side of main board.

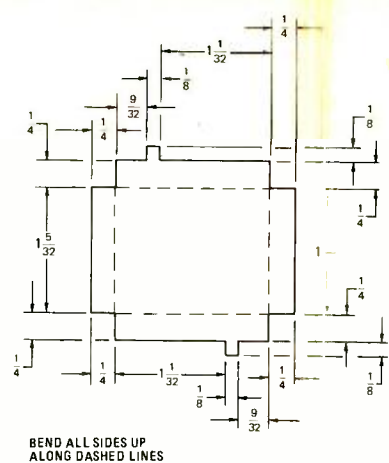


FIG. 9—BOTTOM RF SHIELD is soldered to bottom of main PC board.

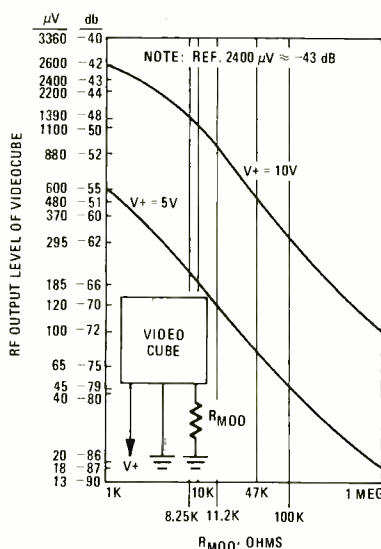


FIG. 10—RF OUTPUT LEVEL versus the value of the resistor connected to the modulation input terminal.

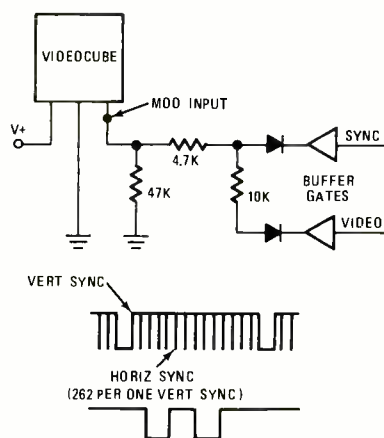


FIG. 11—VIDEO AND SYNC SIGNALS are interfaced to a TV set using the Videocube and associated components.

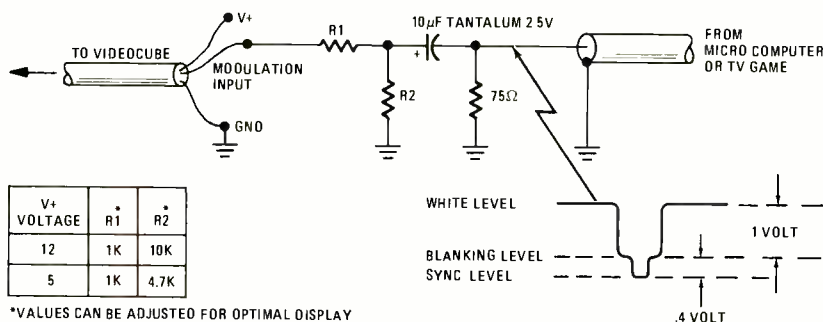


FIG. 12—MICROCOMPUTER INTERFACE to a TV set.

tors C8, C9 and C10, and inductors L2 and L3. This filter removes harmonics from the output signal that otherwise might cause the Videocube to broadcast on more than one channel. Balun T1 matches the output of the Videocube to the TV receiver.

Assembling the Videocube

Figures 2 and 3 show the foil patterns of the double-sided main board while Fig. 4 shows the component layout. If

the PC board you use does not have plated-through holes, make sure to solder all component leads on both the top and bottom sides of the board. (The PC boards supplied in the kit have plated-through holes so the second soldering operation can be eliminated.) Try to keep all component leads short.

Feed-through capacitors C5 and C6 mount from the bottom side of the board. Jumpers connect the ends of C5 to points A and B on the board, as

shown in Fig. 4. Capacitor C6 has one jumper and resistor R6 to connect to points C and D. Figures 5 and 6 show the two foil patterns for the PC board that holds the switch (S1) connecting the TV receiver input to either the external antenna or to the Videocube output. This PC board (see Fig. 7) also serves as a terminal board for the antenna lead-in. I used pressed-in threaded fittings, but you can solder brass nuts to lugs 1 and 2.

After all the components are mounted, two RF shields are soldered in place on the main PC board. These shields are cut out of sheet metal and formed as shown in Figs. 8 and 9.

Oscillator coil L1 is a non-standard type that is available in the partial kit of parts (see parts list). The tuning slug in oscillator coil L1 lets you tune the Videocube to either Channel 3 or Channel 4. Use a small plastic screwdriver or alignment tool to adjust the tuning slug through the hole in the RF shield. Just be careful not to crack the slug.

Using the Videocube

The DC voltage supplied to the Videocube should be between 5 and 12 and the current drawn is about 10 mA. The modulation input controls the output level supplied to the television set. The more current supplied the modulation input, the weaker the signal sent to the television. Since the modulation input itself always sits at about 0.8 volts less than the positive supply voltage, the output level can be set by simply connecting a resistor from the modulation input to ground. By varying this resistor, we can vary the output signal level supplied through the 300-ohm output to the TV receiver. The graph in Fig. 10 shows how this output varies with a resistor (R_{mod}) from the modulation input to ground.

Figure 11 shows a typical application. With $V+$ equal to 10 volts, a 47K

continued on page 69

Build This



10 Function Digital Clock

Simultaneous readout of time, date, alarm and countdown timer. Timer has three modes of operation to turn on or off appliances and the time can be readout in either a 12 or 24-hour format

DIGITAL ELECTRONIC CLOCKS HAVE BECOME commonplace in recent years. Mechanical movements have been replaced with split-second solid-state circuits, and the clocks are being made in a variety of styles. Small bedside and desk models are popular and low-cost. Alarm clocks and clock radios are also plentiful. You can get microwave ovens, CB sets and even TV sets with a digital time readout. The more sophisticated units feature calendar, alarm and timer circuits. They have certain drawbacks; you have to manipulate switches to display the various data. This can be cumbersome and quite inconvenient.

As opposed to mechanical clocks, electronic clocks respond uniquely to a power failure. A few start counting from some random time when the power returns, but most indicate that a power

JEFFREY G. MAZUR

failure occurred. Still others revert to a battery backup to keep the clock running; but if the power remains off so does the alarm and you could oversleep.

The clock described here was designed to alleviate these and other problems. It was decided that the clock should have the following features:


- Constant simultaneous readout of the date, time, alarm and timer as well as status indicators
- Calendar
- 24-hour alarm
- 10-minute snooze timer
- 10-hour appliance or radio timer
- 12- to 24-hour format
- 50- to 60-Hz AC or 12-volt DC operation
- Complete battery backup includ-

ing alarm and timer

Fortunately, a single clock IC is available that satisfies most of these requirements. All the timekeeping functions are performed and stored in separate registers inside the IC. The trick is to allow readout of all these registers simultaneously. To do this, a multiplexing scheme similar to that used by the clock IC itself is used.

Multiplexing scheme

Many LSI circuits requiring a multi-digit display, such as calculator and clock IC's, use a multiplexing scheme to reduce wiring. The idea is to sequentially turn on each readout one-at-a-time and feed it the proper segment information to display the correct number. This permits the 7-segment leads of each digit to be paralleled together.

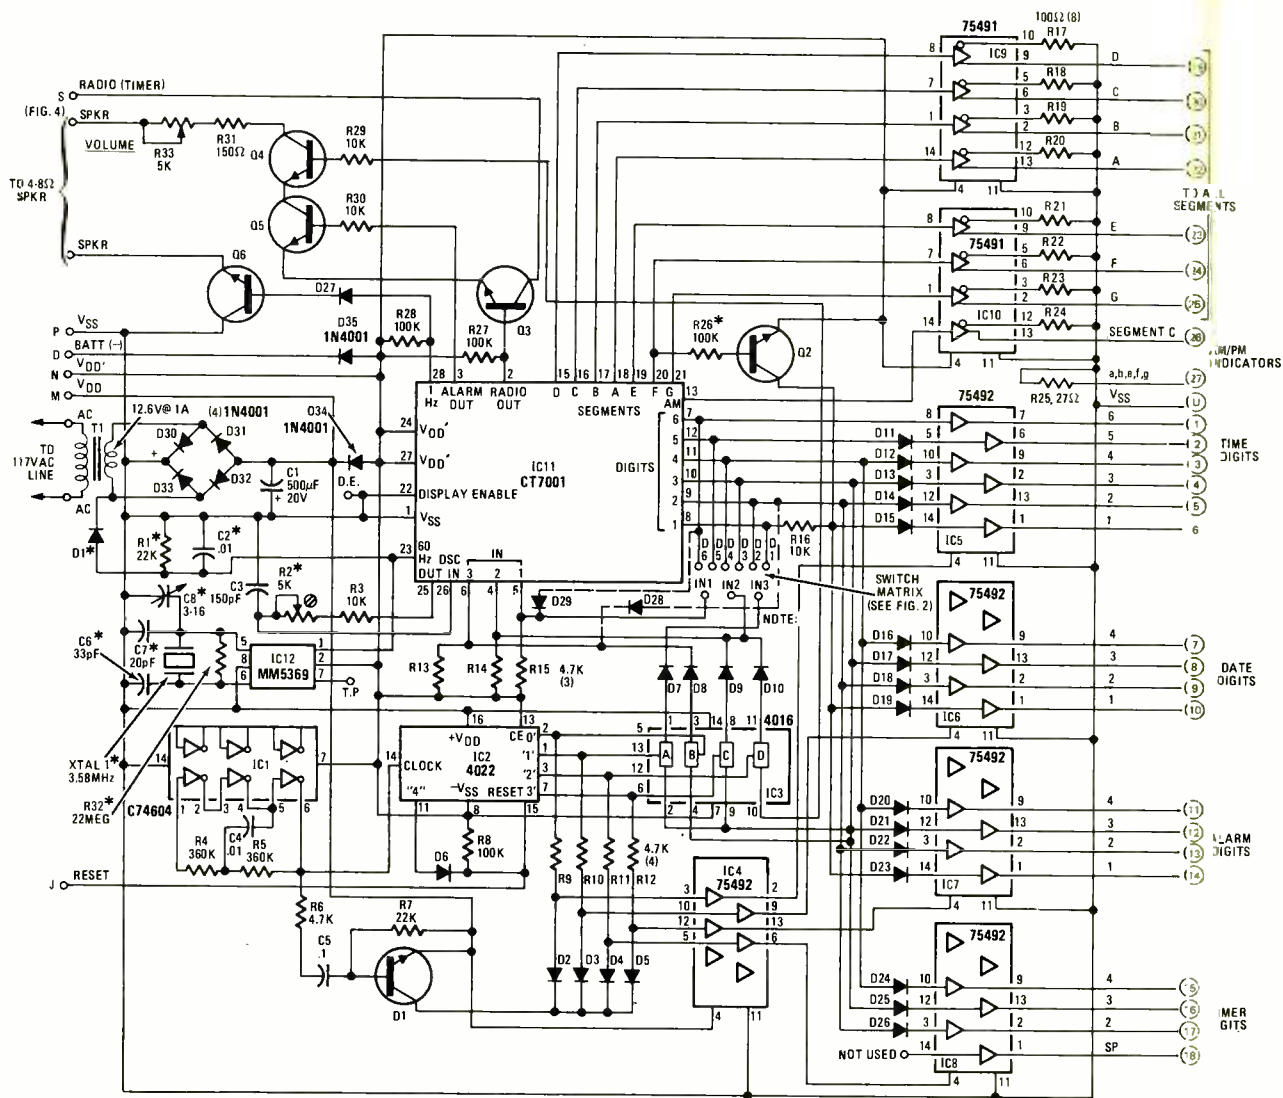

NOTE: D1-D29, 1N914, Q1-Q6, 2N3904
Q30-Q35—1N4001

DE, TP—SEE TEXT
INSTALL D28 FOR 28-HOUR FORMAT
INSTALL D28 FOR 50-Hz OPERATION
CIRCLED NUMBERS SHOW RIBBON
CABLE CONDUCTORS. SEE FIG. 3

NOTE: CIRCLED NUMBERS
SHOW RIBBON CABLE
CONDUCTORS.

V O — 28 COLON
W O — 29 LED 3 (TIMER)
X O — 30 LED 2
Y O — 31 LED 1 (ALARM)
Z O — 32 COMMON

FIG. 1—CLOCK CIRCUIT provides a simultaneous display of the various functions by using a multiplexing technique.

PARTS LIST CLOCK BOARD

All resistors are 1/4 watt, 10%, unless noted

R1*, R7—22,000 ohms
R2*—5000-ohm potentiometer
R3, R16, R29, R30—10,000 ohms
R4, R5—360,000 ohms
R6, R9-R15—4700 ohms
R8, R26*, R27, R28—100,000 ohms
R17-R24—100 ohms
R25—27 ohms
R31—150 ohms
R32*—22 megohms
R33—5000-ohm potentiometer
C1—500 μ F, 20 volt, electrolytic

C2*, C4—0.01 μ F disc
C3—150 pF MYLAR
C5—0.1 μ F disc
C6*—33 pF MYLAR
C7*—20 pF MYLAR
C8*—3-16 pF trimmer
D1*, D2-D27, D28*, D29*, D36-D43—
1N914
D30-D35—1N4001
Q1-Q6—2N3904 or equal
IC1—74C04 hex inverter
IC2—4022AE divide-by-8 counter

IC3—4016AE quad bilateral switch
IC4-IC8—75492 hex LED driver
(Fairchild)
IC9-IC10—75491 quad LED driver
(Fairchild)
IC11—CT-7001 clock
IC12—MM5369 oscillator/prescaler
(National)
XTAL1—3.58 MHz crystal
T1—117 VAC primary; 12.6 VAC, 1-amp
secondary
SPKR—4 to 8 ohm 2-inch round speaker

Then each digit is turned on, or strobed, when its 7-segment information is on the segment lines. This is called scanning. Normally a clock IC would scan each of the 6 digits in an hours-minutes-seconds display. The MT1 does this with all 17 digits. Multiplexing reduces the

number of leads from 136 (17 digits \times 8 leads per digit) to 24 (17 digit lines + 7 segment lines). Although only one digit is on at a time, the scanning is done at a rate faster than the eye can follow. Thus, all 17 digits appear to be on at the same time.

Calendar

A 28/30/31-day calendar displays both the month and day. The calendar changes automatically to indicate the correct number of days in each month. February 29 (leap year) must be set manually.

TYPICAL SWITCHING ARRANGEMENT
CONNECT STATUS COMMON TO V_{DD}

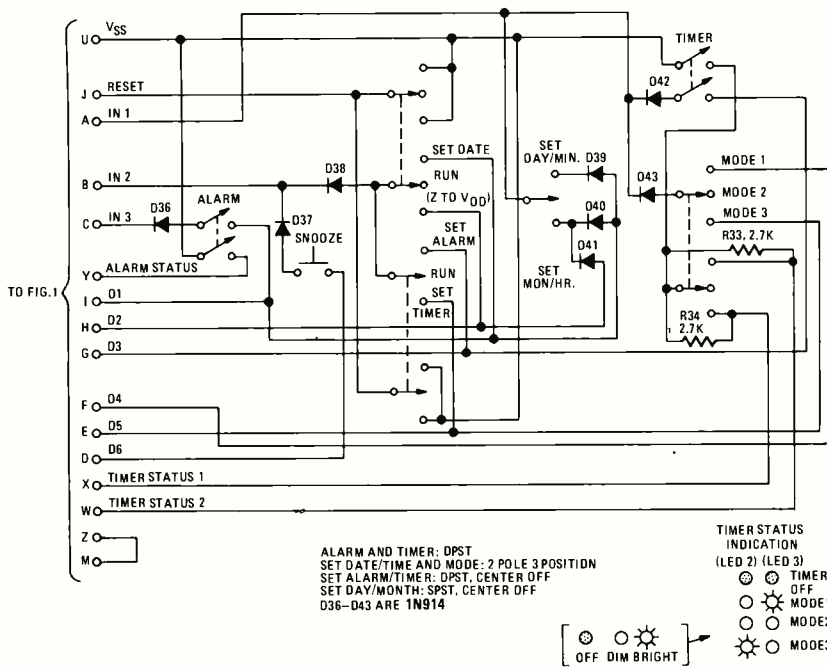


FIG. 2—SWITCH CIRCUIT selects the various functions and sets the time, timer calendar and alarm.

Alarm

The alarm is a true 24-hour device. When the hours and minutes of the alarm setting coincide with the actual time, and the ALARM switch is closed, the alarm will sound. You can turn it off at any time by opening the ALARM switch. Turning the switch back on will allow the alarm to sound 24 hours later.

A 10-minute snooze timer temporarily silences the alarm as many times as desired. A volume control adjusts the sound from a gentle "beep-beep" for a gradual awakening to a loud "BEEP" that will arouse even the heaviest sleeper. An LED status light on the display tells you when the alarm is set.

Timer

The clock has a countdown timer that can be set in one-minute increments up to 9 hours and 59 minutes. This counter is used as a timer to control an external device such as a radio, TV or similar appliance. When activated, the timer will count down from the preset time until it reaches zero, and can be interrupted and restarted at any time.

The external device is controlled using one of three modes:

Mode 1: The device is turned on for the preset amount of time and then turns off when the counter reaches zero.

Mode 2: The device stays on for the preset period but turns on again at the alarm time.

Mode 3: The device is turned on at the alarm time and stays on for exactly the preset length of time.

The position of the ALARM switch does not affect operation of the timer. The time remaining on the timer is constant-

ly displayed and three LED status lights show whether the timer is operating and what mode it's in.

How it works

The schematic diagram is shown in Fig. 1. The heart of the circuit is the 7001 clock IC. This single MOS IC contains all timekeeping and control logic. Several features are worth noting. To reduce wiring, a multiplexing scheme controls the display so that all digits can be bused together. The digit lines are also used in conjunction with three input lines to control the internal-register and switch setting. For example, if IN2 (IC1 pin 4) is connected to the digit-1 output (IC1 pin 8), the calendar can be set. If IN2 is connected to the digit-2 line, then the time can be set. Similar connections select the entire range of modes. Isolating diodes are used in series with each switch to prevent shorting the digit lines (see Fig. 2).

One-half of IC1 forms an oscillator that drives octal counter IC2 (see Fig. 1). Connecting the '4' output of the counter to its reset pin causes it to count 0,1,2,3,0,1, etc. This gives four outputs that are continually turned on and off in sequence, that is, scanned. These outputs operate the analog switches to select each particular clock function and also to turn on the respective display digits. Because of the time needed for the 7001 IC to switch from one function to another, the displays are blanked momentarily by Q1. This assures that the clock IC sends the correct information when each display is turned on. Each 7-segment display (time, alarm, etc.) has a digit driver (IC5 through IC8)

DISPLAY BOARD

- R1-R7, R9-R13—390 ohms
- R8—27 ohms
- R14—Select for proper brightness of colon (330 to 560 ohms)
- RD1-RD4, RD9-RD11—FND70 7-segment LED display (Fairchild)
- RD5-RD8—DL750 7-segment LED display (Litronix)
- RD12-RD14—NSN33 3-digit 7-segment LED display (Monsanto)
- RD15—MAN3—7-segment LED display (Monsanto)
- LED1-LED3—any small discrete red LED
- LED4, LED5—micro-size LED
- *Optional, see text.

The following parts are available from West Side Electronics, 24348 Vanowen St., Canoga Park, CA 91307. Kit No. MT-C: Complete parts kit including both circuit boards and switches; less case. (Specify whether on-board or wall-type transformer desired.) \$109.

Kit No. MT-SS: Complete parts kit for clock board only; includes board less switches, case and transformer, \$50.

Kit No. MT-1: Clock printed circuit board only; double-sided, etched and drilled with plated-through holes, \$16.50.

Kit No. MT-2: Display printed circuit board only; single-sided, etched and drilled, \$10.

All prices include postage and handling on U.S. orders. California residents add state and local taxes as applicable.

controlled by a master driver (Q1) that turns it on at the proper time. Diodes D11 through D26 are needed on the inputs to the digit driver IC's because of leakage between the inputs when the ground pin is floated.

AM/PM indication is multiplexed along with the digits. Instead of a light to signal either AM or PM, a separate digit is used to display either "A" or "P." This is done by simply turning on segments a, b, e, f, and g and controlling segment c by the AM output of the clock IC.

To prevent false setting, the reset line of the counter IC is also connected to V_{SS} through the SET switches. Thus, when any of the functions are set, only the time display is on but it displays the contents of the register being set.

The display board holds the 17 digits and other indicators. The schematic diagram of the display board is shown in Fig. 3. All 7-segment leads are paralleled together, but resistors are added in series with the alarm and timer displays. Connections for several status and colon LED's as well as their dropping resistors are also provided using one common lead.

In the 12-hour format, blanking of the leading zero in the digit-1 position is desirable. This means displaying 1:42 instead of 01:42. Transistor Q2 does this

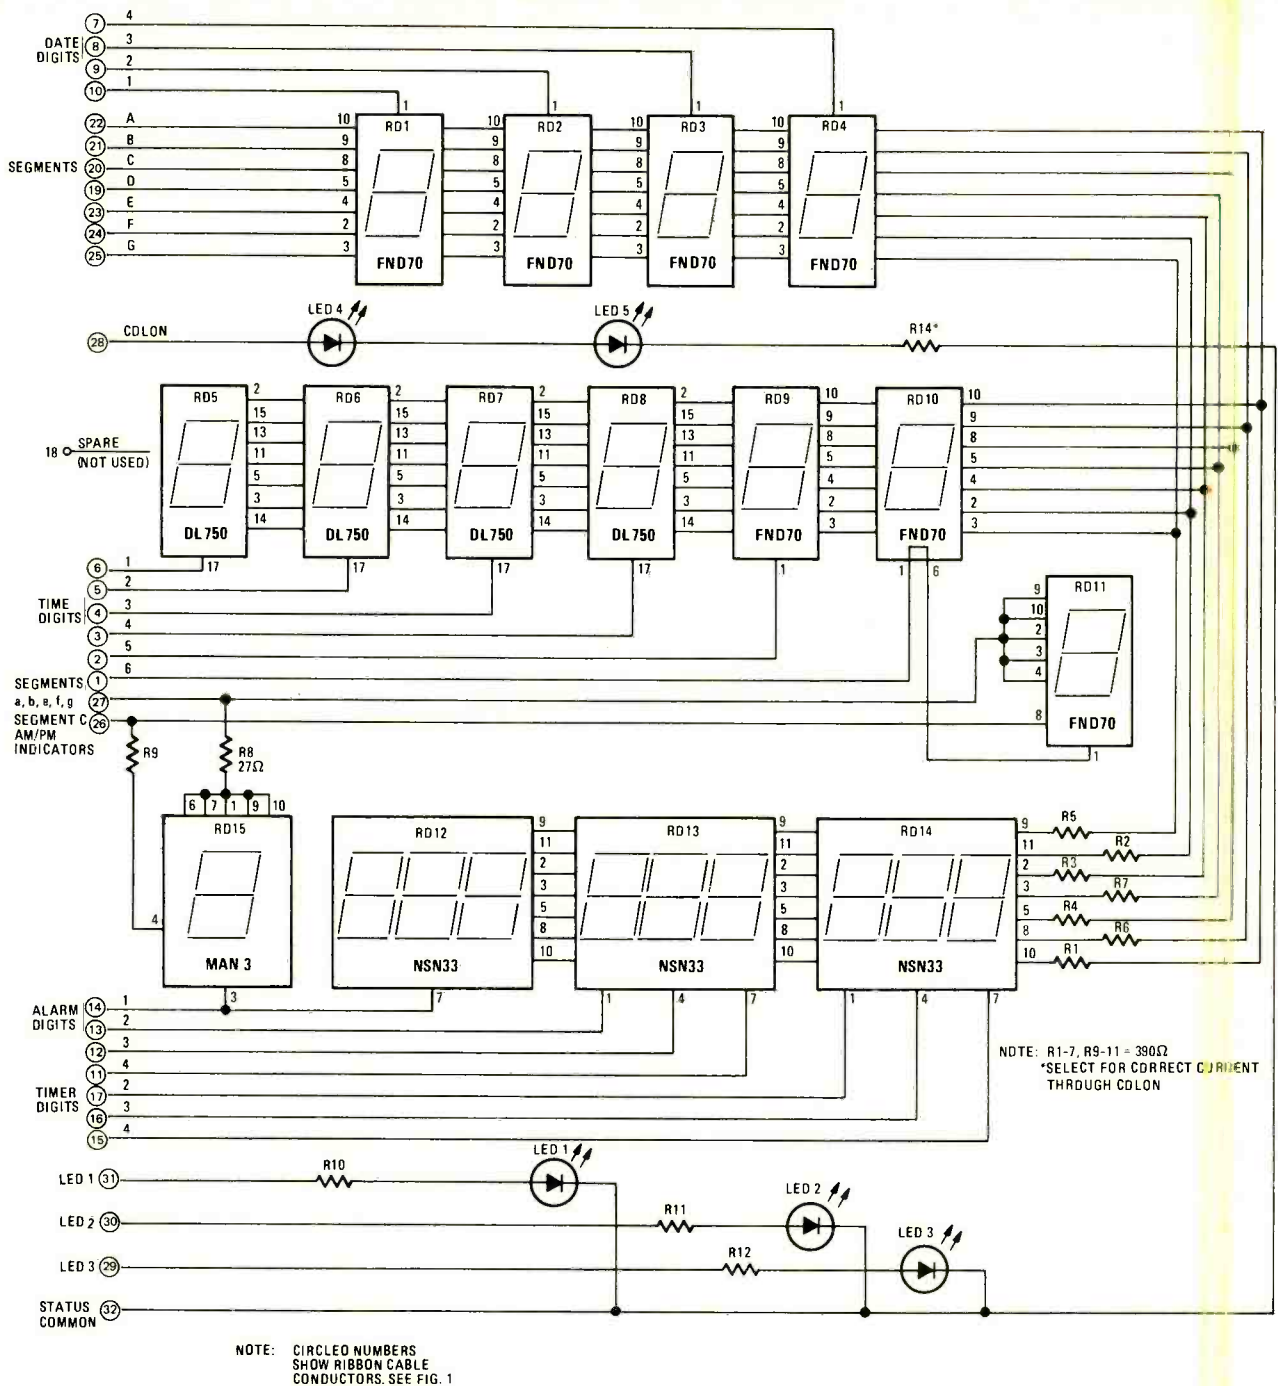


FIG. 3—DISPLAY CIRCUIT consists of 7-segment and discrete LED readouts.

by turning off digit 1 when segment *f* is on. This occurs when the first digit is a zero but not when it is a 1.

The RADIO-OUT control line from the clock IC is used to drive Q3, which can supply current to an external device such as a radio or relay. If the external device can be powered by the clock's power supply and draws less than 300 mA, then it can be connected between the RADIO and V_{SS} pins of IC11 (see Fig. 4-a). For control of a 117 VAC or high-current device, a relay is used as in Fig. 4-b.

The alarm circuit consists of Q4, Q5

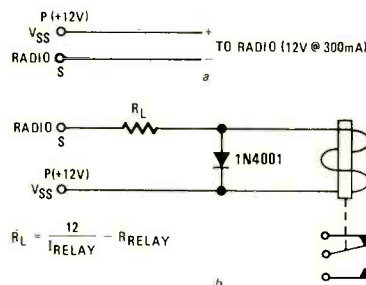


FIG. 4—TIMER CONTROLS external devices directly if current drawn is less than 300 mA as shown in a. For high-current devices, use relay as shown in b.

and Q6. Transistor Q6 turns on and off at a 1-Hz rate from pin 28 of the clock IC. Transistor Q4 is controlled by a digit line and thus has a squarewave on it at the clock's multiplex frequency (about 1 kHz). Transistor Q5 is turned on by the ALARM OUT pin of the 7001. The combined result is that when the ALARM OUT pin goes high, the speaker is fed a 1-kHz squarewave that "beeps" on and off at a 1-Hz rate.

Next month, the article concludes with the construction details, the foil patterns and the component placement diagram.

To be continued.

Build This

\$1

Logic Probe

This easy to build TTL logic probe is inexpensive and will save you hours of troubleshooting time when probing around digital circuits

ALEX F. BURR

WITH THE INCREASED USE OF DIGITAL IC'S for everything from inexpensive computers, through musical doorbells, to simple alarm circuits, the need for specialized equipment to test digital circuits has become apparent. The nature of two-state logic circuits—logic high or logic low—makes possible simple test equipment. It is not usually necessary to measure how much signal is present but just whether it is there or not.

This need has been met by commercial probes that range from the \$65 Hewlett-Packard logic probe to a widely advertised kit for less than \$10. Of course, the former is a more precise instrument than the latter but both do essentially the same thing—cause a lamp to light when the probe detects the presence of a logic high level. A voltmeter or an oscilloscope can do the same job but the logic probe is easier, quicker and more convenient to use.

Still \$65 is too much for most people and even \$10 is quite a lot when you consider that the TTL logic probe described here can be built for a total parts cost of less than \$1.

For \$1, the probe, of course, cannot be complicated. It does do the job, however, of distinguishing whether a pin of an IC is in a logic high or a logic low state. The schematic of the probe is shown in Fig. 1.

About the circuit

The schematic diagram is shown in Fig. 1. The most important design decision was to require that the wire with the alligator clip be connected to 5 volts so that the LED will light on a logic low level rather than to attach the wire to ground and have the LED light on a

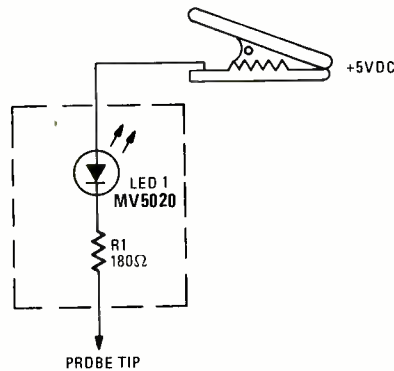


FIG. 1—SIMPLE LOGIC PROBE uses only two components.

PARTS LIST


R1—180 ohms, 1/4 watt, 10%
LED1—red LED (MV5020 or equal.)
24-inches No. 20 stranded wire
straight pin
insulated alligator clip

logic high. The latter would be preferable except that the characteristics of TTL logic prevent this.

TTL logic is designed so that logic low is any voltage below 0.8, while a logic high is any voltage above 2.4. In almost every case, a gate in a low state will sink 16 mA. That means that you can supply up to 16 mA to the output of a gate without causing its voltage to rise above 0.8. Unless an external pull-up resistor is used, the output of a gate in the logic high state will usually be about 3.5 volts. However, in practice a gate need only supply a few microamps, so any attempt to draw a significant amount of current from logic high output will pull down the output level.

In our case, if we tried to light an LED (which requires about 20 mA) from a logic high output, the voltage would drop from the usual 3.5 to about 1.8. The LED would light up in many cases, but the stages connected to that output would be disabled since the level is now not high enough to be identified as a real logic high. In other words, the probe would upset even those parts of the circuit that were working correctly and if there is anything you don't want it is test instruments that upset the circuit being tested.

The probe is designed so that it draws no current from a high output and it supplies only about 18 mA to a low

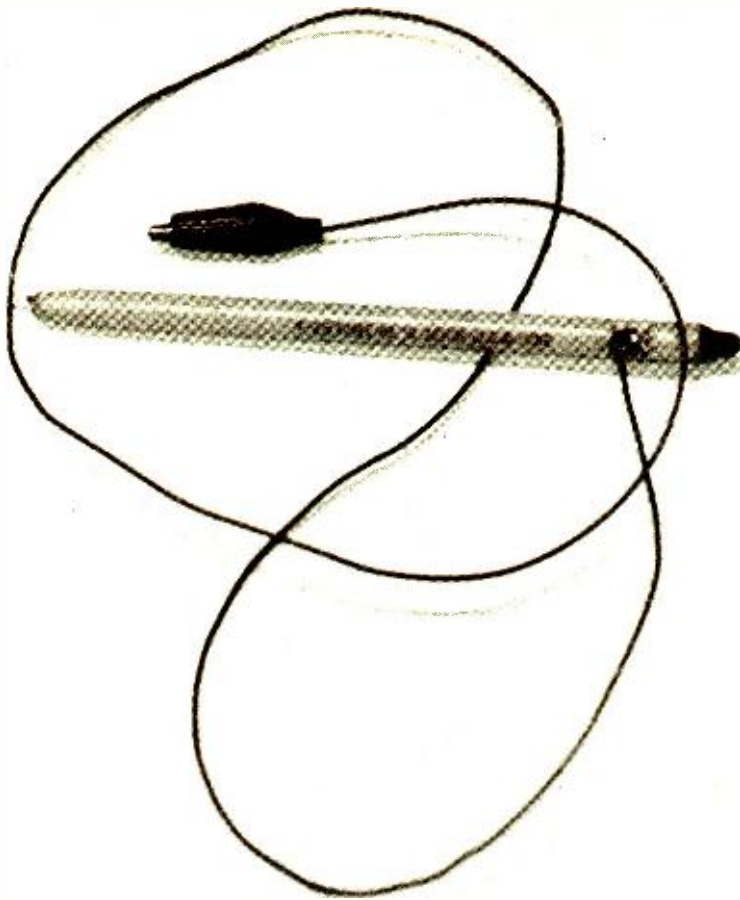

output. This current level raises the typical voltage at a low output by only 0.1 or 0.2 volt, not nearly enough to cause any disturbance in most circuits.

A green LED can be used instead of the more common red because most commercial probes use a lighted red LED to indicate the presence of a high. You can, of course, use the red LED specified in the parts list in your probe; but you must remember that, when your LED is lit, the probe is touching a logic low.

When you consider that the lowest priced commercial probe kit costs 10 times as much, this probe has to be pretty cost effective. Of course, at this price it does have a few disadvantages.

Perhaps the biggest one is that it does not distinguish between a logic high and an open circuit. Both of these conditions cause the LED to remain off. When it is connected to a gate without pull-up resistors, the LED will glow dimly on a logic high.

The probe has no overvoltage protection. If the clip is accidentally attached to a voltage greater than 10 or if the tip accidentally touches a point greater than 6.5 VDC, the LED will likely burn out.

Construction

The probe is easy to build. First collect the parts. The ballpoint pen is

one of the inexpensive disposable types. It is approximately the same size and shape as a lead pencil and just right for the probe. Remove the point and the ink holding tube attached to the point and throw them away. Also, discard the plastic plug on the top of the pen.

Just about any LED can be used, just so long as it is small enough to fit in the top of the pen. I used an MV5020, which is a red LED. This one draws about 20 mA, has a 0.185-inch diameter lens, a 0.230-inch diameter base and a 0.10-inch lead spacing. If you prefer to use a green LED, try one that is similar in size to the MV5020. An MV5253 has a slightly larger lens but the base and the lead spacing is the same.

You will find that if the LED is the MV5020 size, it will just fit into the top of the pen. Drill a $\frac{1}{16}$ -inch hole in the side of the pen about $\frac{3}{4}$ -inch down from the top. You should just be able to see the end of the anode lead of the LED through the hole when the LED is set into the top of the pen. Connect the resistor to the other lead of the LED and connect a straight pin to the other end of the resistor with a wire long enough so that the pin sticks out of the pen about $\frac{1}{2}$ -inch where the ballpoint used to be.

Now feed a wire 24-inches long into the hole drilled in the side of the pen and out the top. Solder the wire to the

anode lead of the LED with as small a joint as possible. Tape that connection then insert the whole assembly into the top of the pen, pin first. Push on the LED gently while pulling the wire back out through the side. When the LED is set into the top of the pen, you will have a probe with the tip of a straight pin sticking out the bottom, an LED set on the top, and a length of wire coming out the side. Fill the pen near the pin with epoxy and apply a little around the LED to make sure it does not fall out. Connect an alligator clip to the free end of the wire and the probe is complete.

Using the probe

The probe is simple to use. Just hook the alligator clip to any 5 VDC point in the circuit and touch any pin of the IC to be tested. If that pin is at a logic low level, the LED will light up brightly. If the pin is at a logic high level, the LED will remain dark. Thus, you can trace the levels throughout the entire circuit until you find the spot where the levels are not correct.

The probe will even indicate the presence of pulse trains. If the repetition frequency is less than about 25 Hz, the individual pulses will be indicated. If the frequency is greater than about 25 Hz, the individual pulses will blur and the LED will glow at about half intensity.

R-E



New Hobby You Can Build

*Two machines: one an 8080A, the other an
a long list of peripherals, accessories and*

On May 30, 1977, Radio-Electronics was invited to preview the new computers at the Heath plant in Benton Harbor. This is our preliminary report on what we were shown. At a later date, after we have had the opportunity to construct our own machines we will update this report.

The new line, and it is a full line, consists of two computers, the H8 and the H11. The H8 is an 8-bit system based around the 8080A microprocessor. It features an intelligent front panel with octal data entry and display, and a resident monitor with built-in bootstrap for one-button program loading or storage.

The H11 is a much more sophisticated machine. It is a 16-bit computer that uses the D.E.C. (Digital Equipment Corporation) LSI-11 with 4K memory, a built-in backplane and a regulated switching power supply.

Peripherals, that are compatible and can be used with either system include a video terminal, paper-tape reader/punch/duplicator. System dedicated peripherals include a hard-copy printing terminal and a cassette recorder. I/O (input/output) interfaces, additional memory and supplementary software packages complete the initial products and additional hardware and software will be added later.

Both systems are backed with complete documentation—assembly and user manuals, schematics and pictorial diagrams, printed circuit board layouts—all the great aids that Heath had traditionally provided its kit builders. There is even a Heath Users group already being formed and Heathkit H11 owners are automatically eligible for membership in DECUS, the Digital Equipment Corp. users group.

The H8—an 8080A machine

This is the basic hobby computer in the newly announced Heath line. The 8080 is a well-known standard microprocessor. In the H8 it comes with a built-in 1K × 8 ROM (Read Only Memory) that contains a monitor program for controlling the front panel and load/dump operations. The H8 cabinet is designed to accommodate up to 32K of memory and has a total capacity for 65K of addressable memory.

The intelligent front panel has a 9-digit 7-segment octal display that permits the user to dynamically display register and memory contents while programs are running. A 16-digit keyboard allows quick and accurate data entry. A built-in programmable audio circuit and speaker makes possible a wide variety of special audio effects while a set of LED status lights make it possible for the operator to monitor important machine states.


The CPU board that houses the 8080A comes factory-wired and tested to eliminate the most common source of errors that a kit builder might encounter. The system bus that Heath is using is a 50-line bus that is not compatible with any other 8080 bus currently in use. This means that any accessory items you may have for the Altair or S-100 bus *cannot* be used in the Heath computer. A built-in convection-cooled power supply completes the main frame. It can handle up to 32K of memory and two I/O interfaces. The basic H8 kit includes the wired and tested CPU, complete assembly and operations data as well as all systems software in audio cassette form. It sells for \$375 in kit form.

Memory cards for the H8

Additional memory, a must if you are going to do anything with your H8 is available. Model H8-1 is an 8K memory board kit that comes with 4K of static RAM for \$140. An additional 4K expansion memory IC set (Model H8-3) is \$95. Each static memory card uses T14044 4K × 1 static memory IC's. Memory PC boards are available only as a part of a memory kit. All IC's are in sockets, and each memory card contains additional on-card power-supply regulation. The memory is addressable throughout the entire memory range and comes complete with a memory test program.

Parallel I/O card for the H8

To interface with outside peripherals you must have an I/O, preferable several. Heath offers their model H8-2 for this purpose. This I/O card kit offers 3-input/3-output 8-bit ports. It is completely compatible with the serial I/O port used to interface a cassette recorder with the machine. The parallel I/

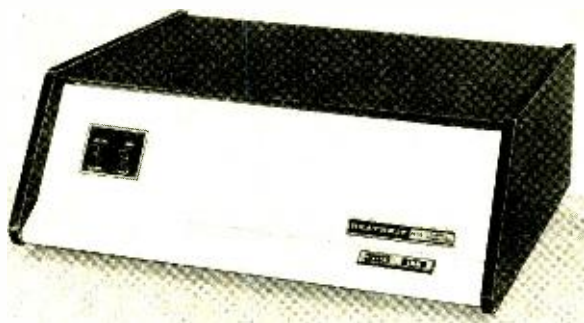

Computers From A Kit

LSI-11 are available in kit form from Heath—plus software



O has complete interrupt control and independent addressing is available. Output polarity is selectable and pulsed or transparent handshaking is included. Like the memory board, on-card power-supply regulation is provided. The H8-2 kit is \$150.

Serial I/O card for the H8

When you want to interface a cassette recorder to your H8 computer you must have a serial I/O board. In the H8 system you need the H8-5. It has a 1200 baud rate and sells for \$110.

Video terminal kit

The H9 video terminal kit can be used with either the H8 or the H11 computer. It costs \$530 and has a 12-inch screen that displays up to 12 lines of 80 characters and contains enough built-in memory for one page of data. It offers long- or short-form display. Long-form is full lines of data 80 characters long. Short form is 4 columns of 20-character lines—quite handy during programming as you can then look at 48 lines of program at a time. Baud rates are variable from 110 to 9600. Editing features are built in. This terminal also includes a parallel interface for the H10 tape reader/punch/duplicator.

Tape reader/punch/duplicator

Like the video terminal, this unit can be used with either computer. It costs \$350 as a kit and can read, punch or duplicate paper tape. This multi-purpose device is a 50-CPS high-speed reader; a long life 110-baud 10-CPS punch and has a copy mode duplicating tapes. It uses a parallel interface with handshakes and can accommodate either fan-fold or rolls of paper tape. The unit comes with a chad tray for catching the punched out paper scraps and a fan-fold tape tray.

H11, a 16-bit computer

This powerful machine is designed around the DEC LSI-11, a 16-bit CPU. The CPU board is supplied completely assem-

bled and tested with $4K \times 16$ dynamic RAM. Memory is expandable to 20K. The unit includes a built-in backplane, power supply with switching regulators and full circuit protection, and flexible I/O interface accessories. A complete DEC system software package is also included. It contains editor, PAL-11 assembler, linker, on-line debug package, input/output executive, BASIC and FOCAL. Mail order price of the H11 is \$1295.

The mainframe has no front-panel keyboard or readouts. It does feature a tilt-up removable card cage and a built-in cooling fan.

Static memory for H11


As many as four additional 4K static memory cards can be added to the H11. Heath calls these model H11-1 and cost \$275 each. The cards use $1K \times 4$ static RAM memory (no refresh is required). They are fully compatible with the H11 bus and the PDP 11/03 bus. Only a single jumper is needed for bank selection and maximum read/write time is 500 nS.

Parallel I/O for H11


The H11-2 is a parallel I/O for the H11. It costs \$55. It offers 16 diode-clamped data input lines. Inputs and outputs are latched. 16-bit words are on 8-bit byte programmed data transfers. Also provided are jumper-selectable address and vector generation. Four control lines go to each peripheral device—reader enable low, data valid low, new data valid low and punch ready low. The logic lines are TTL compatible.

Serial interface for the H11


Labeled as the Heath model H11-5 this serial interface card can be either EIA or optically isolated. It offers selectable crystal-controlled baud rates of 50, 75, 110, 134.5, 150, 200, 300, 600, 1200, 1800, 4800, and 9600. Also provided are jumper-selectable stop-bit and data-bit formats and H11 bus interface and control logic for interrupt processing and vector generation. Interrupt priority is determined by the electrical position along the H11 bus. All control/status register and data registers are compatible with H11 and PDP-11/03 software.

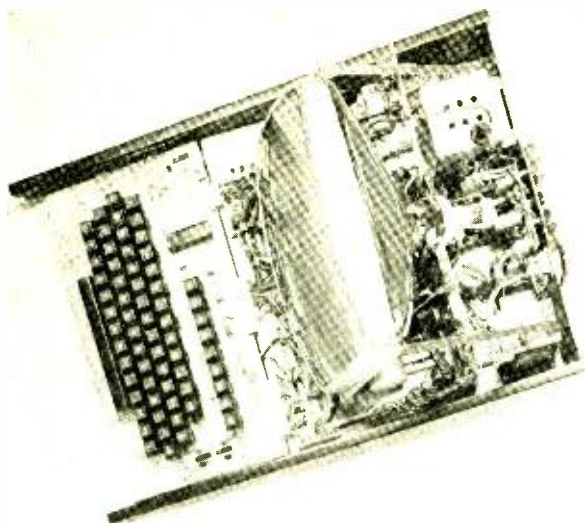


INSIDE THE VIDEO TERMINAL you'll see the CRT, keyboard, electronics and power supply that make it work.

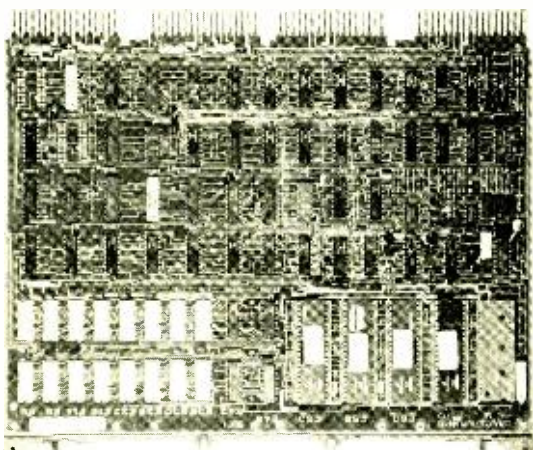

CPU CARD FOR THE H11 includes the LSI-11 microprocessor and comes completely assembled as you see it here.

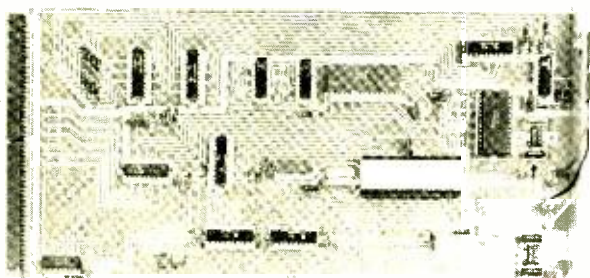

CPU CARD FOR THE H8 includes the 8080A microprocessor and is supplied with the kit as a fully assembled board.

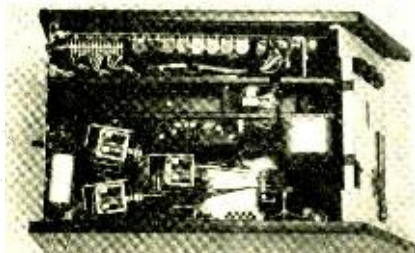

WITH ITS COVER REMOVED you can see the works of the paper tape printer/punch/duplicator. It can be used with both computers.

Printing terminal

To complete the system Heath is offering an LA36 DEC writer. The price of this unit has not yet been announced. It offers a tractor paper feed, a maximum line width of 132 characters and baud rates of 110 and 300. In addition there is auto line feed.

Software systems

Two entirely separate software systems are provided. The H8 software goes with the H8 machine, the H11 package with the H11 machine.

The H8 software is made up of BH Basic (BH stands for Benton Harbor), expanded BH Basic, TED-8 (a text editor), HASL-8 (an assembler), BUG-8 (debug), PAM-8 (panel monitor). These programs come in cassette tape form and are supplied with the H8.

For the H11 the following software is now available: PTS Basic-11, 8K Focal-11, 4K Focal-11, Edit-11, Link-11, PAL-11S

All software for the Heath H11 computer is completely compatible with the DEC PDP-11 and can run on any operating PDP-1103 system.

Heath software will be supplied in three forms; cassette magnetic tape, paper tape and read-only memory (ROM). The panel monitor for the H8 (PAM-8) is supplied in a ROM and like all ROM, cannot be modified by the user.


BUG-8, TED-8, HASL-8 and BASIC are provided with the H8 computer in cassette form and are available as an option in paper tape form. Both the cassettes and the paper tape are compatible with the required error checking and synchronising characters used by the front panel monitor system.

Also packed with the H8 is a six-section software manual. This is, however, a reference manual and is not intended to teach the owner how to use the software. If you have never used a text editor and an assembler, for example, it would be best to obtain an introductory text in that subject.

Conclusion

As you can see there are two great systems here with more accessories still to come. There will be more I/O interfaces more memory, a floppy disc, and printers. **Radio-Electronics** will present more details on all of these new systems as we get them.

R-E

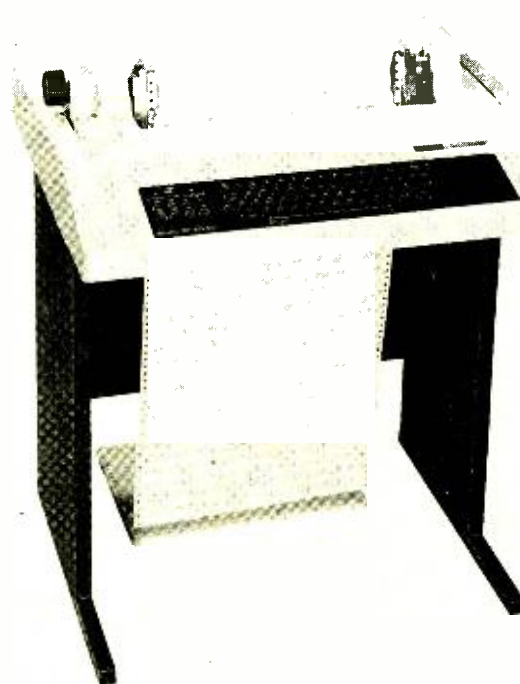

THE LA-36 DEC WRITER II keyboard printer terminal. The price of this unit has not yet been determined.

Add Sound To Your Home Movies

Making home movies is a popular hobby throughout the world. Here are details on one moviemaker's approach to adding sound to his movies with the aid of a stereo tape recorder

ANDREW JAREMKO

EVER SINCE THE INVENTION OF MOTION pictures and sound recording, attempts have been made to give pictures a voice. Edison experimented with talking films in his Kinetophones, using his cylinder recorder. Commercial films, with Hollywood leading the way, eventually evolved a set of reliable but cumbersome techniques for adding sound to the movies. Magnetic recording simplified sound film production tremendously and also made it possible for the amateur film maker to add sound to his films. A great number of gadgets and systems have been constructed for this purpose over the years, beginning with mechanical gadgets and eventually using electronics. Many of these were designed to allow the hobbyist to run a sound track on a tape recorder, unlike the professional system that puts both picture and sound on the one strip of film.

The problem of making a circuit that would reliably synchronize a movie projector and a tape recorder to produce sound movies has occupied me for some time. I worked through a couple of very bad discrete component designs and a couple of versions using RTL logic IC's, one of which worked fairly well. My latest version uses CMOS logic throughout and represents my state-of-the-art. The movie projector has to be modified to allow the synchronizer to work, but after that any stereo tape recorder can be used to provide fully synchronized soundtracks. It should be possible to build the circuit for under \$75, depend-

ding on where you shop.

The problem in playing a tape recorder and projecting a film so that the result is a talking picture is *synchronization*. This means that the sound that matches a particular image in the film should always match that image every time the film is projected. We are used to seeing voices match lip movements, and talking is the main thing that people expect from sound films. At the normal home movie speed of 18 frames per second (fps), lip movements will appear to be out of sync if the sound comes in more than one frame early or late.

All we really need is a system in which both the tape and the film run at a speed accurate enough so that at the end of a reel they haven't drifted apart by more than one frame. With a 400-foot reel of super-8 film, this is an accuracy of one part in 28,800, or about 33 parts per million. If our projector and recorder can run this accurately, allowing for all the factors that can affect their speed—tape stretch and slip, motor warmup, line voltage variations, etc.—the problem is solved. All we have to do is start the two in sync and they will stay in sync. This procedure has been a part of professional filmmaking for some time and is called "crystal sync" (since accurate crystal oscillators are used to regulate running speeds). But that kind of accuracy is expensive.

The professional method of making talking pictures is of course to put the soundtrack on the film. Sound-on-film (SOF) has always been around in home

movies, and Kodak's recent entry into the market with SOF super-8 equipment will of course make it much bigger. Relatively recent improvements in projectors have resulted in sound on 8-mm film that is often superior to the sound on 16-mm film. But putting the sound on the film as it is shot and leaving it there creates many serious problems in the editing stage. Trying to make a film without editing is roughly comparable to trying to paint a picture without removing the brush from the canvas.

In professional productions the sound is virtually always recorded separately and handled separately through the editing process. It gets onto the film only at the final stage, when the print is made. The main use for SOF is news, and even here it is frequently taken off the film for editing. Once it is removed from the film, the problem of getting it back on in the right spot comes up.

We can get around the need for extreme accuracy by recording a signal on a tape that will tell the projector how fast it is to run. (The tape should be allowed to run free, since any interference with its speed is likely to cause wow and flutter.) This means that the stereo recorder will be carrying a mono soundtrack in one channel and sync information in the other. Since the two tracks are on the same piece of magnetic tape, anything that affects the soundtrack will affect the sync track and the sound will remain in sync.

The most logical method to use is simply to record one signal of some sort



(usually a pulse) for every frame of film that should go through the projector. The synchronizer would keep track of how many pulses have gone by on the tape and make sure that the same number of frames of film are displayed. For live sync sound all that has to be done is to obtain a pulse from the camera every time a frame goes through it and record this signal along with the sound. When the film and sound are run together using the synchronizer, each frame will go past at its correct moment relative to the soundtrack, and the result is talking pictures.

Some specifics

So far the circuit is pretty vague, with only its main function specified and absolutely no notions about other duties or about how to put it together. Based on my previous experience with synchronizers, I had decided on several other characteristics. I wanted to put it inside the projector where it would always be ready to use and would have no cables to fail in the middle of a show. It had to have the smallest possible number of adjustments, ideally zero, and should require no adjustment or other attention during projection. Many earlier mechanical and electrical synchronizers required the projectionist to make adjustments continually during the show, which is annoying for him and a distraction for the audience.

There should be an indicator or indicators to prove to the projectionist that it is running properly, especially if there are no adjustments he can make. It

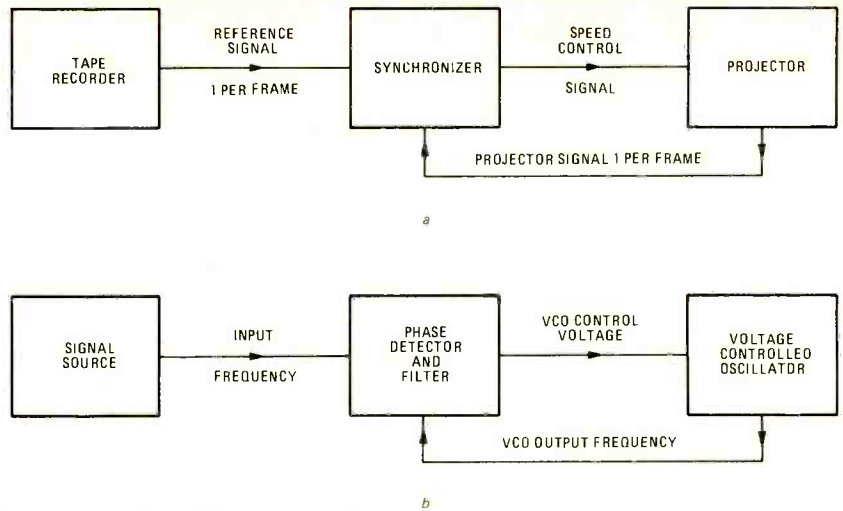


FIG. 1—SOUND SYNCHRONIZATION CIRCUIT is based on synchronizer and is shown in a. For comparison, system based on phase-locked-loop is shown in b.

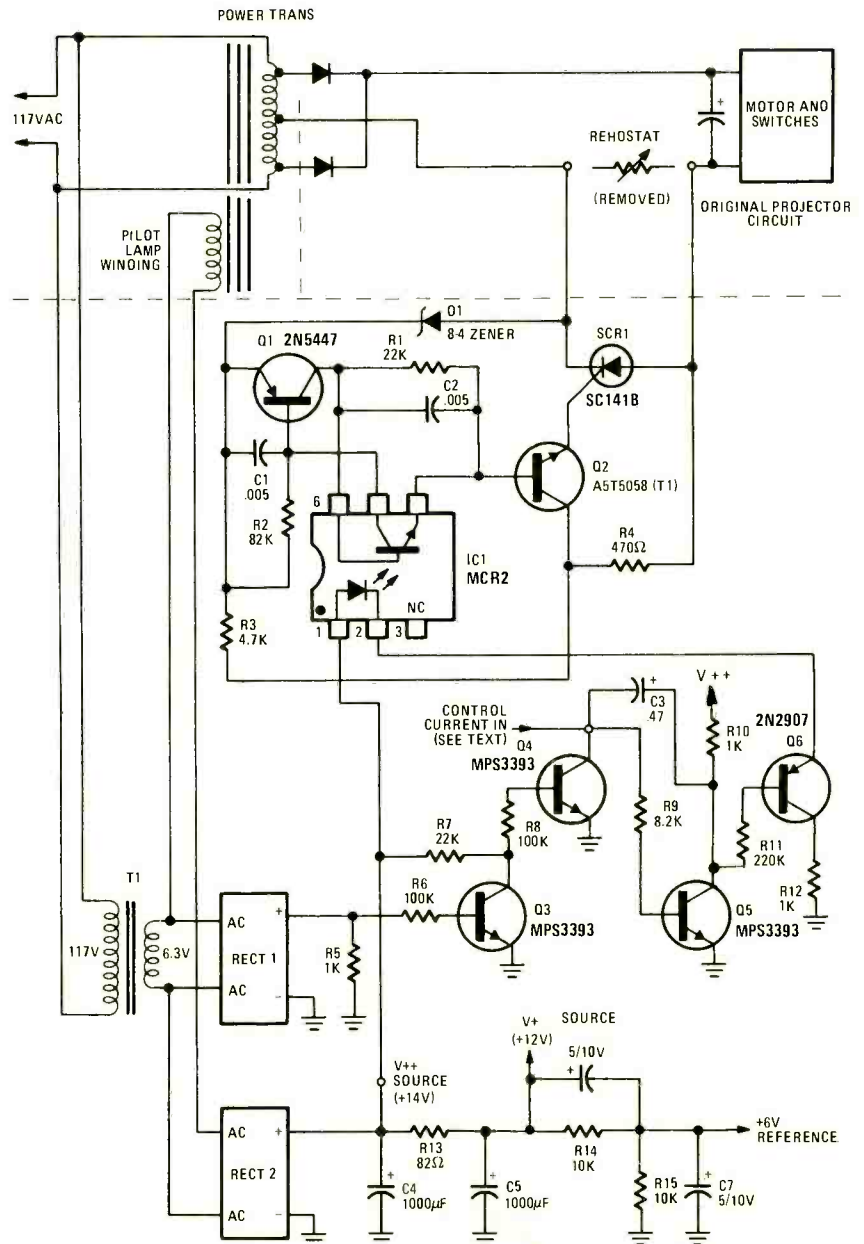


FIG. 2—MOTOR SPEED CONTROL AND POWER SUPPLY. Control current would normally come from synchronizer circuit, not shown in this article.

PARTS LIST

All resistors $\frac{1}{4}$ watt, 10%, unless otherwise noted

R1, R7—22,000 ohms

R2—82,000 ohms

R3—4700 ohms

R4—470 ohms

R5, R10, R12—1000 ohms

R6, R8—100,000 ohms

R9—8200 ohms

R11—220,000 ohms

R13—82 ohms, $\frac{1}{2}$ watt

R14, R15—10,000 ohms

C1, C2—.005 μ F, 50V

C3—0.47 μ F, 35V

C4, C5—1000 μ F, 16V, electrolytic

C6, C7—5 μ F, 10V, electrolytic

D1—8V, 1W, Zener

Q1—2N5447

Q2—A5T5058 (Texas Instruments), (Radio Shack 276-2012 or equal)

Q3, Q4, Q5—MPS3393 or equal.

Q6—2N2907

IC1—MCT2 opto-isolator

SCR1—SC141B (G-E) or equal (see text)

RECT1, RECT2—bridge rectifier, 2A, 50 PIV (Radio Shack 276-1151 or equal)

T1—Filament transformer, primary 120 V 60 Hz, secondary 6.3 V

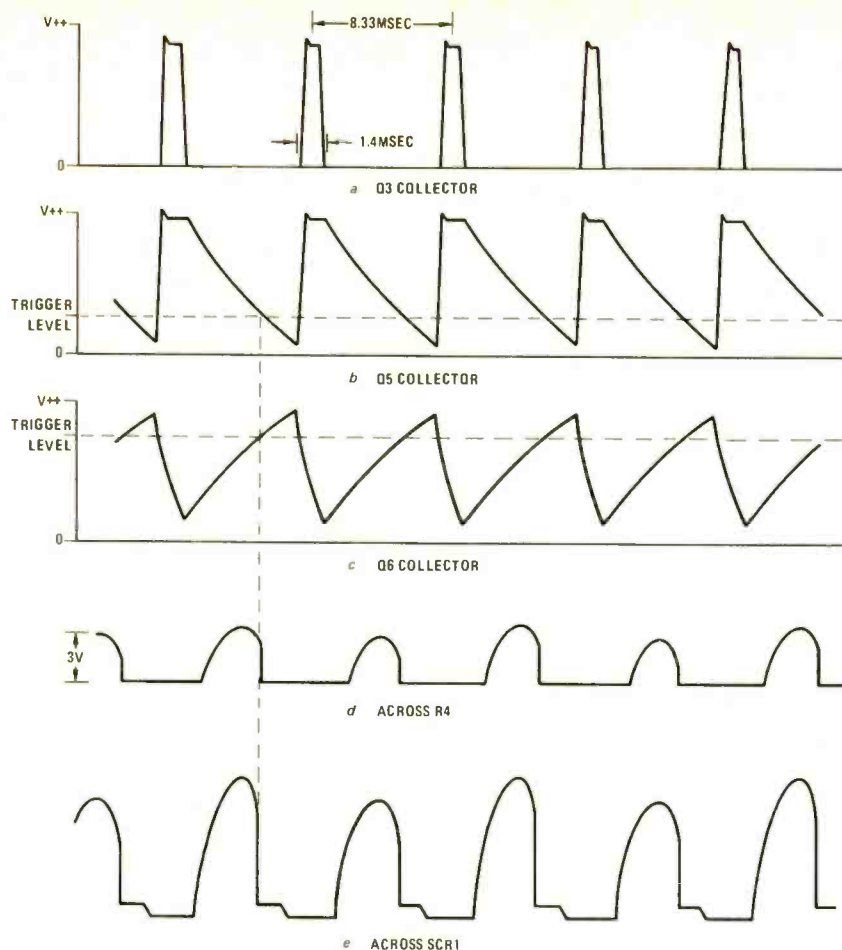


FIG. 3—WAVEFORMS for the motor speed control and power supply circuit.

should be able to cope with small starting errors and still maintain sync to the desired ± 1 frame. The fact that the film is to have synchronized sound implies that picture and soundtrack have to be in sync right from the start, which is asking a lot from human reflexes. My circuit will find and maintain synchronization as long as the film and tape are started within about one second of each other.

Finally, the most important consideration for the circuit is that under no circumstances can it allow the projector to damage the film. In practice, this means that it cannot allow the projector to stall, since if it did the lamp would quickly burn a hole in the film. The motor also usually cools the lamp; a stalled motor would overheat the lamp and shorten its life—no laughing matter at the present price of lamps.

If the circuit is to go inside the projector and be permanently connected it has to be able to let the projector run without an external control input, as for projecting silent films. The original speed control (if any) could be left in operation when required, or the synchronizer could use an internal control signal when the external one is not present. I decided to use an internal signal and replace the projector's original speed control entirely. I gained

some speed accuracy from this, since the internal oscillator is more stable than the rheostat control was. With the projector fully under the synchronizer's control one must be careful to see that it can deal with all the circumstances that can arise.

The circuit is getting to sound quite complex, with no hints as to how it can operate. A rough block diagram of it appears in Fig. 1-a. If the external reference signal disappears, the circuit will replace it with one of its own. For comparison, Fig. 1-b is a rough block diagram of a phase-locked-loop (PLL) circuit. The two are very similar and show a very basic application of negative feedback. Any change that occurs in any part of the feedback loop is detected, amplified and used to eliminate itself. It happens that PLL's are available as single IC's. Unfortunately, they would do only half the job—to them, any cycle of the reference frequency looks the same as any other cycle, so that they can quite happily lock anywhere. Our circuit has to lock on a particular cycle of both the reference and the controlled frequencies.

The projector

All this has assumed that the projector speed can be electronically controlled over a useful range. A digital

solution to the problem is to generate a number representing how fast the projector should be going, and then convert this number to an analog signal that controls the projector's speed. The other thing that is needed is the signal that says that one frame has gone by. This signal is usually easy to come by and will be discussed later. A lot more depends on the motor.

First, a couple of warnings. Any unauthorized tampering with a projector immediately voids the manufacturer's warranty. It is best to work on a machine whose warranty has expired, or to pretend that it isn't covered at all. Modifications can also be difficult for service technicians to understand, since the manufacturer's manuals won't show them. Second, the modifications involve working with the 120-volt AC line. Shock hazards must be avoided or eliminated. This applies to hazards during construction and testing as well as for use.

The type of speed control used will depend a lot on the type of motor in the projector, and to a lesser degree on the range of control required. Generally speaking, induction motors (anything without brushes) can be easily controlled over a very narrow speed range, and are difficult and expensive to control over a wide range. AC or DC motors with brushes are easy to control over a wide range. If a projector runs at only one speed or has a mechanical speed change so that the motor doesn't change speeds, it is safe to assume that it uses an induction motor. A continuously variable speed over a wide range is a good indication of a brush motor. The only real way to tell is to look. Fortunately, the backs of projectors are pretty easy to remove.

The speed of induction motors depends on the line frequency, the line voltage and the load that the motor drives. The line frequency has the greater effect on speed, while the line voltage mainly affects the power that the motor can deliver. If the line voltage is reduced the speed drops until the load on the motor matches the power available from it. If it drops too far, the motor will stall. If precautions are taken against the motor stalling, the limited control available this way can be enough to allow the synchronizer to work. The control frequency shouldn't vary more than about $\pm 5\%$. Since controlling the line voltage will only reduce the motor's speed, the nominal frequency of the control signal has to be less than the motor's maximum speed to allow for speeds above and below the nominal speed. The Motorola *Semiconductor Power Circuits Handbook* (1968) contains a chapter on controlling induction motors, and RCA's *Transistor, Thyristor and Diode Manual* contains a chapter "Power Switching and Control." The

RCA book says that "Speed ratios as high as 3:1 can be obtained . . . with certain types of induction motors."

A typical modification

When I bought my present projector, I was careful to get one that could be easily modified. It uses a DC motor operating from a 70-volt supply, with the speed controlled by a rheostat in series with the motor. The projector's original circuit and the circuit I replaced it with are shown in Fig. 2. The projector contains a large power transformer to supply the projection lamp with 21 volts at about 7 amperes. The primary is used as an autotransformer and is tapped at appropriate points to provide the motor with a maximum of about 70-volts DC via a full-wave rectifier. The lamp winding is not shown, and the small winding that is shown provided power to a pair of pilot lamps.

Since the rheostat comes before the

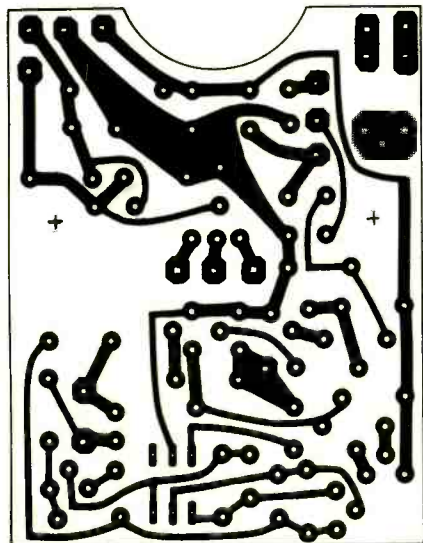


FIG. 4—FOIL PATTERN shown full-size. Top view—foil up.

filter capacitor, it has a pulsating DC waveform across it and can be directly replaced with a SCR. In this type of capacitor-input power supply, the peak currents through the diodes and SCR are about ten times the average current into the motor. (For more details on power supplies, see Don Lancaster's article on designing regulated power supplies in the December 1973 issue of **Radio-Electronics**.) Choose an SCR that has a lot of safety margin in both current and voltage, since it should never blow out. The SC141B in the parts list is actually a triac, but it works quite happily as an SCR. It had the ratings I needed and I had it on hand.

In circuits using SCR's, the cathode lead usually becomes a common point, often the ground. But in this case, it would put the ground line about 50 volts away from either side of the power line and create a definite shock hazard. This voltage has to be kept inside the projector and ideally should be kept to the immediate vicinity of the SCR. IC1 provides the necessary isolation. It consists of a LED optically coupled to a phototransistor, but electrically insulated to 1,500 volts.

How the circuit works

The circuit will switch the SCR on when current flows through the LED in IC1. Whenever the voltage across the SCR goes to zero, the SCR, Q1 and the phototransistor in IC1 will all cut off. As the voltage across the SCR rises they will remain cut off, since Q1's base is connected to its emitter via R2 and the phototransistor is similarly biased by R1. With no current flowing in either of these transistors, Q2 receives no base current and deprives SCR1 of gate current.

As soon as current begins to flow in the LED, the phototransistor begins to conduct and a voltage appears across

R2. This starts Q1 conducting, which produces a voltage across R1 that helps the phototransistor turn on. This regeneration, or positive feedback, continues until both transistors are fully conducting. This provides Q2 with base current and allows it to conduct, providing gate current to SCR1. As soon as the gate current reaches a high enough level, the SCR will conduct. When the line voltage goes through zero, everything shuts off again. C1 and C2 provide a low-impedance path to noise signals that might otherwise trigger SCR1 prematurely.

The combination of Q1 and the phototransistor is called a transistor switch, and has a very low impedance when it is conducting. D1 is an 8-volt Zener that prevents the voltage across the Q1-phototransistor combination from exceeding 8 volts, and in addition prevents them from ever being reverse-biased. Transistor Q2 is included so that Q1 and the phototransistor only need to carry small currents and to isolate them from the 70-volt peak that can show up across SCR1. Any component failures in this part of the circuit could cause the projector to stall, so everything is operated well within its ratings. This network will trigger the SCR on from a signal electrically isolated from it.

With this type of circuit, maximum power is delivered to the motor if the SCR is triggered just before the peak of the line voltage. If the SCR is triggered much before this, it will remain cut off until the line voltage rises above the voltage on the filter capacitor. If it is triggered later, the capacitor will not receive as much charge and the voltage across it will drop, delivering less power to the motor. With AC motors, the earlier the SCR turns on the more power will get to the motor. Induction motors need most of the cycle present just to run, so that the SCR would have to be switched on even earlier.

The current input to the LED is provided by Q3 through Q6. Transistor Q3 is driven by the output of a full-wave bridge rectifier, RECT1. Whenever the power line waveform goes through zero, the voltage across R5 goes to zero and Q3 cuts off, making its collector positive. Resistor R5 ensures that Q3 does actually cut off. When this happens, Q4 conducts, grounding its collector and forcing Q5's collector positive. This charges C3 and cuts Q6 off, which also removes the current to the LED in the isolator.

As soon as the line voltage waveform gets away from zero, Q3 saturates and Q4 cuts off, allowing the control current to start discharging C3. This brings Q5's collector toward ground, and at some point Q6 will begin to turn on. As soon as enough current flows in Q6 and the LED in IC1, the transistor switch turns

continued on page 82


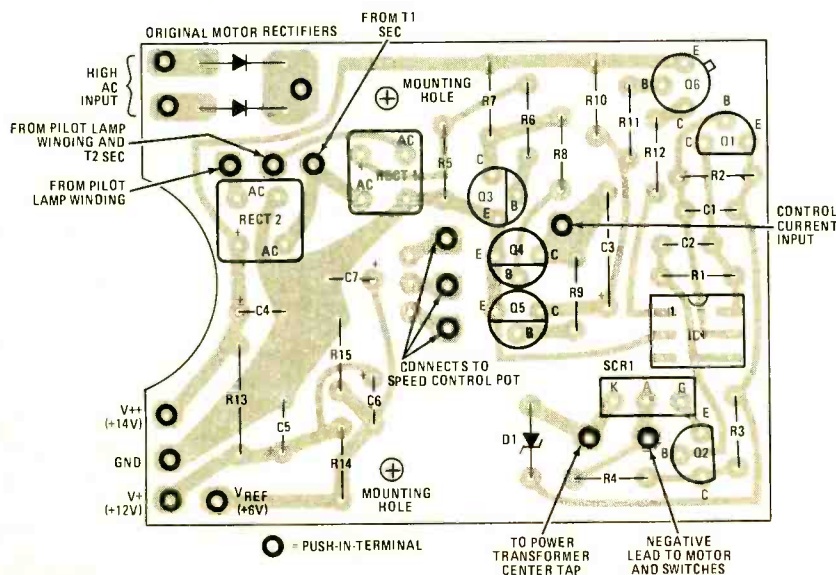


FIG. 5—COMPONENT PLACEMENT diagram.

TEST EQUIPMENT

all about RF signal generators

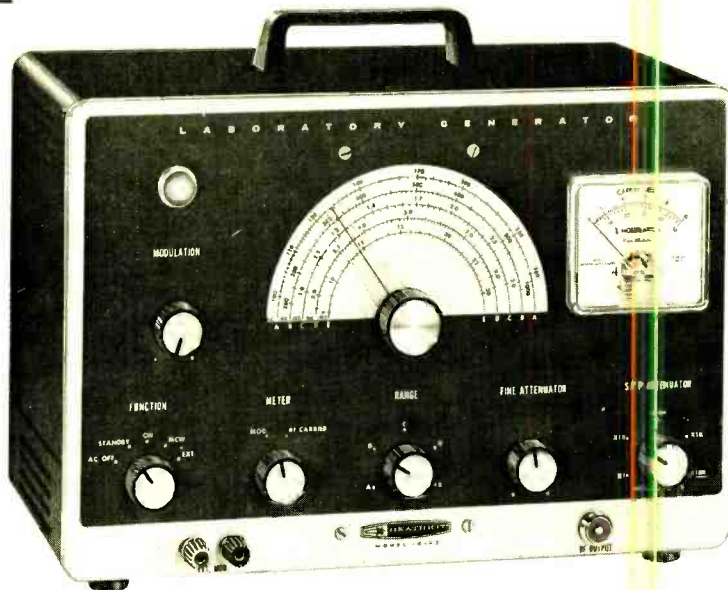

PART I—An in-depth look at the different types currently available, including how they work, their specifications, features and applications

CHARLES GILMORE*

RADIO-FREQUENCY SIGNAL GENERATOR implies a number of basic features. These include: frequency range; modulation capability; and amplitude control. The RF (radio frequency) signal generator has a frequency range (typically 50 kHz to 10MHz) whose lower frequency limit is above 20 kHz (the practical upper limit of the audio frequency range). However, the upper frequency limit of an RF signal generator can be as high as 1 GHz. Generators operating above 1 GHz fall into a special class called microwave signal sources. Modulation may be AM (Amplitude Modulation), FM (Frequency Modulation), pulse, or a combination of any of the three. A wide range of output amplitude control is implied, including the ability to generate signals of 1 μ V or less.

At the present time there appears to be very little middle-of-the-road pricing for RF signal generators. The truly low-cost units fall in the \$200 or less area. The cost of those with moderate or great sophistication exceeds \$1000 and extend to \$10,000 or more. The specifications, features and applications of the generators covered in this article include generators costing as much as \$2000 or

* Manager Design Engineering, Heath Co., Benton Harbor, MI

\$2500, as well as low-cost units.

The price level of RF signal generators has not changed significantly. There have been many generators for the past 30 years that fall into the \$1000 to \$2500 classification. The performance level of the generator has changed. The performance level of the generator changed with a change in need. This need is primarily concentrated in the communications industry, with secondary uses in the area of consumer product servicing, amateur radio, instrumentation and the home experimenter. There is also a need for the RF generator in related design work.

The need for better specifications and features is forced by the sophistication of the products the generators are used with. For example, the communications industry has changed VHF and UHF standards from wideband FM deviation (± 5 kHz) to narrowband deviations (± 3 kHz). This change necessitates generators with precise modulation capability and substantially increased frequency stability requirements.

Low-cost generators fill the needs of the home experimenter, and supply the RF signals required by the service shop for simple alignment procedures. These generators (or oscillators, as they should

be known) normally lack stability, RF shielding, frequency range, and modulation capability required to verify performance specifications when servicing or calibrating communications, industrial or high-fidelity equipment.

Producing the signal

The methods for generating an RF signal cover a wide gamut of technology. The simplest generators are power oscillators that use a fixed inductor and a variable capacitor as frequency determining elements. On the other end of the spectrum are signal generators with sophisticated synthesis circuits that deliver signals of high spectral purity, extreme stability and uniform modulation capability. In between these extremes are the L-C (inductance-capacitance) oscillator with stages of buffering, modulation and power amplification. This oscillator is normally housed in a sturdy casting that provides a stable mechanical and temperature environment, as well as a high degree of shielding. Generally speaking, this type falls into the upper end of the low-cost signal generator price class.

Figure 1 is a block diagram of a basic RF signal generator using a band-switched L-C oscillator. This oscillator

drives a buffer amplifier that helps maintain frequency stability with changes in output load. The buffer amplifier may be eliminated on lower cost RF generators. Although the signal from the basic oscillator, and therefore the signal from the buffer amplifier, may well be at (or greater than) the amplitude required of the generator output, a power amplifier is used to drive the 50-ohm low impedance lines. The output amplifier supplies the maximum possible signal, usually in the 1 to 3 volt area, to the output attenuator. The attenuator reduces the output signal level to the level selected by the operator.

As you can see in the block diagram, extensive shielding around these four sections prevents stray signals from leaking from any one of these components. Such shielding usually involves a rather complex mechanical design, often a box within a box. Shown as dashed boxes are other circuit components that may not appear on all generators.

Signal generators contain some form of modulator. Amplitude modulation is applied to either the output amplifier or to some modulator ahead of the output amplifier. A few generators modulate the oscillator directly. The modulator receives audio signals from an internal

oscillator or an external source. On higher quality generators, the audio oscillator provides tones of 400 Hz and 1 kHz. Simpler generators use one tone. If the generator features FM, signals from the modulating oscillator are applied to frequency modulating components on the bandswitch oscillator. This is usually done through circuitry that maintains a constant deviation, regardless of oscillator frequency setting.

In some complex RF signal generators, frequency-control circuitry monitors the output frequency, compares it to a standard, and applies corrective signals to the bandswitch oscillator. This action maintains the desired frequency setting. Such frequency-control circuitry is only found on more costly generators.

Basics of modulation

Two types of modulation, AM and FM, are by far the most common. AM only is common on RF signal generators with upper frequency limits in the 30 MHz to 60 MHz area. Most signal generators with FM capability also have AM capability. Some generators, especially those designed for work in the high VHF and UHF region, also have pulse modulation capability. Pulse modulation is zero to 100% amplitude

modulation in the form of a square wave or pulse.

There are two ways to view amplitude modulation. Figure 2-a shows an envelope presentation, as seen on an oscilloscope, for a 100% modulated RF carrier. A section of the unmodulated carrier is also shown for reference. This display presents amplitude versus time period. Figure 2-b shows a signal with less than 100% amplitude modulation. Figure 2 also shows how to measure percent of modulation using this display. Figure 2-c shows a spectrum analyzer display of an amplitude-modulated signal. This display has amplitude on the vertical axis and frequency on the horizontal axis. The centermost line represents the carrier frequency. The signal to the left represents the lower sideband; the carrier frequency (f_c) minus the modulating frequency (f_m). The line to the right represents the upper sideband; the carrier frequency plus the modulating frequency. The display of the spectrum analyzer shows the power distribution in an amplitude-modulated signal. Each of the sidebands contains one-quarter of the power.

Figures 3-a and 3-b show oscilloscope and spectrum analyzer presentations for an RF carrier frequency modulated by a single sinusoidal tone. In the oscillo-

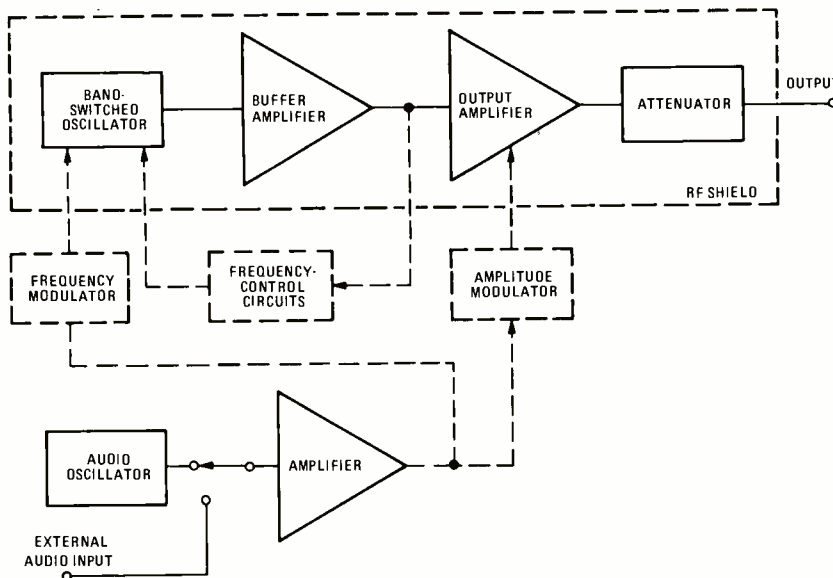


FIG. 1—BASIC RF SIGNAL GENERATOR with a bandswitched L-C oscillator.


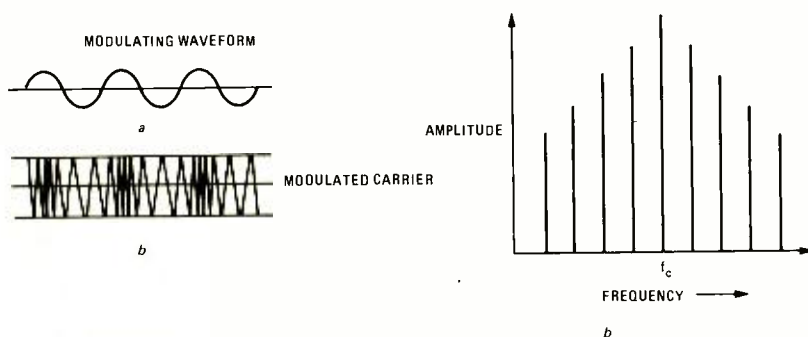


FIG. 3—FREQUENCY MODULATION. Modulating signal is shown in a and b shows modulated carrier. Frequency spectrum of FM signal is shown in c.

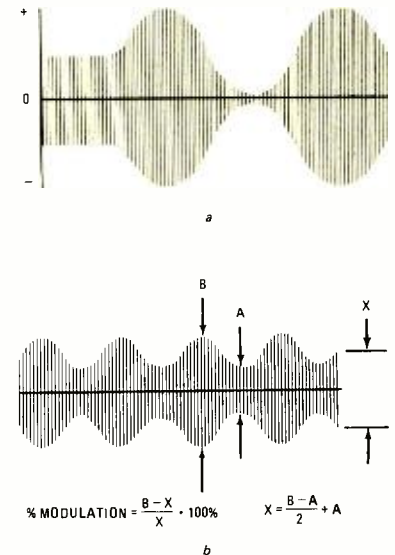

$$\% \text{ MODULATION} = \frac{B-X}{X} \cdot 100\% \quad X = \frac{B-A}{2} + A$$

FIG. 2—AMPLITUDE MODULATION. 100 percent modulation level is shown in a. Less than 100 percent modulation is shown in b. Frequency spectrum of an AM signal is shown in c.

scope trace, note an increase in frequency for positive peak of the modulating waveform and a decrease in frequency for negative peaks of the modulating waveform. The difference between carrier frequency with no modulation and peak carrier frequency with modulation is referred to as the deviation. The ratio of the modulating frequency to the deviation is called the modulation index.

The spectrum analyzer display (Figure 3-b) shows a number of sidebands spaced above and below the carrier frequency at integral multiples of the modulating frequency. Note, this differs in three ways from the AM signal. First, if the modulating signal is purely sinusoidal, AM generates only one upper and one lower sideband. Second, the amplitude of these sidebands are a direct function of the percentage of modulation. Third, the amplitude of the carrier remains constant with modulation.

When FM is used, there are an infinite number of sidebands (although only the first few are strong enough to be given any real consideration). The amplitude of these sidebands and the carrier depend on the modulation index. For example, at a modulation index of approximately 2.4, the carrier amplitude is reduced to zero and increases for

modulation indices greater or less than 2.4. Frequently, FM deviation is measured by modulating the carrier with a signal of known frequency. The deviation is increased until the carrier amplitude, as observed on a spectrum analyzer, goes to zero. For example, the carrier passes through zero amplitude when 5 kHz deviation is reached if the modulating frequency is 2 kHz.

As noted earlier, pulse modulation is essentially 100% amplitude modulation by a rectangular pulse. Figure 4-a shows an envelope presentation of a pulse waveform and RF carrier modulated by this pulsed waveform. As you can see, the carrier is turned on and off by the pulses. Figure 4-b shows a spectral analysis of this same waveform. The center line is the carrier frequency. There are many sidebands, each one spaced from the carrier by integral multiples of the pulse repetition rate. The amplitude of each of these sidebands depends on the duty cycle of the modulating pulse and the completeness of the modulation. As can be seen from a spectral analysis, complex signals, such as square waves or pulses, require an extremely wide bandwidth. Therefore, pulse modulation is usually confined to very high-frequency or ultra high-frequency generators where considerable bandwidth is available.

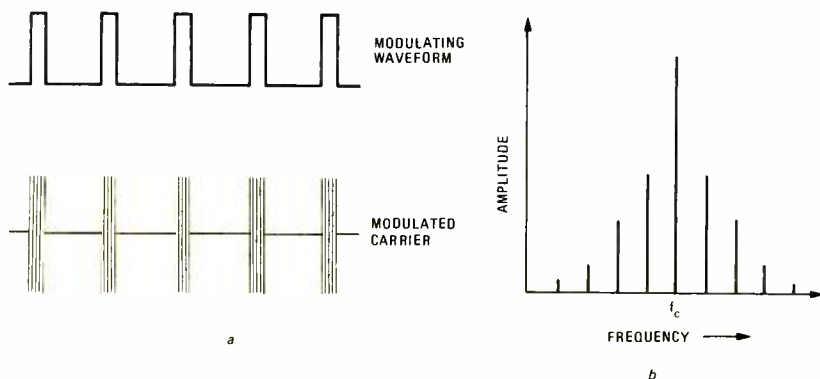


FIG. 4—PULSE MODULATION is essentially 100 percent amplitude modulation by a pulse signal. Modulating signal is shown in a and modulated carrier is shown in b. Frequency spectrum of pulse modulated carrier is shown in c.

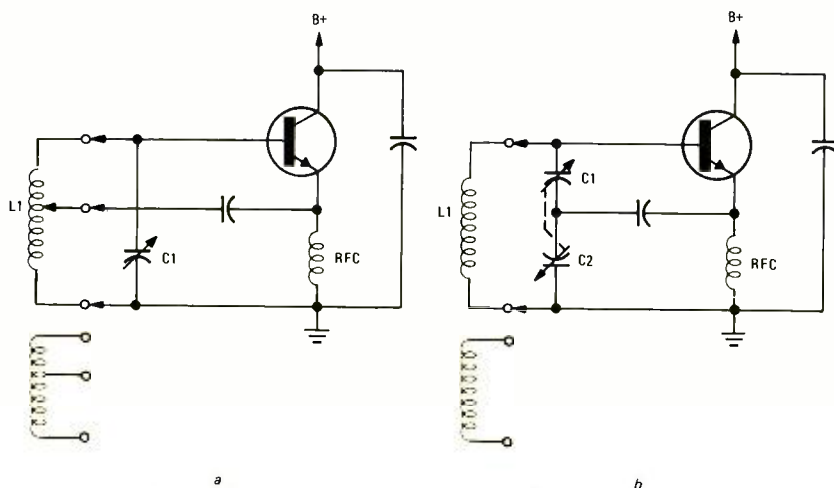


FIG. 5—HARTLEY OSCILLATOR is shown in a. Colpitts oscillator is shown in b.

Basic oscillators

The oscillator is the heart of the RF signal generator. The stability and purity of the generator is directly related to the stability and purity of the oscillator. Therefore, a great deal of design time and effort goes into the oscillator circuit. One of the most common oscillators used for generators that cover 50 kHz to 60 MHz, or even 100 MHz, is the Hartley oscillator.

The circuit in Fig. 5-a is a simplified Hartley oscillator. The frequency of oscillation is determined by the values of C1 and L1. When the desired frequency can no longer be reached by adjusting the variable capacitor, a new inductor is switch-selected. Frequency for an L-C oscillator is directly related to the square root of the capacitance and inductance. Therefore, a large capacitance change is required to obtain a reasonable change in frequency before a band change is necessary. Typically, capacitance changes of 10:1 to 12:1 are used. As a result, band ranges on most RF signal generators using L-C oscillators cover a frequency spread of about 3:1 to 3.5:1.

The stability and spectral purity of the generator output is largely dependent upon the characteristics of the L-C circuit. A high Q (quality factor) circuit designed with silver plated coils and air variable capacitors is used. Extreme care is given to the mechanics of the oscillator, and it is not uncommon to find the entire oscillator circuit housed in a sturdy box, or perhaps a hollowed out casting. This provides low susceptibility to thermal variations, mechanical shock and vibration, and external capacitances, all of which affects oscillator stability and purity.


In addition to minimizing environmental effects upon the stability and purity of the oscillator, extensive decoupling circuitry is used on all power supply connections. Such decoupling serves two purposes. First; it keeps external signals from modulating the oscillator and therefore creating undesirable spurious signals. Second; it removes the desired signal from the power supply lines so the signal is not radiated except through connections to the output attenuator terminals.

An alternative oscillator configuration is shown in Fig. 5-b. It is the Colpitts oscillator. A split capacitor is used to control the ratio of feedback here, rather than the tapped coil of the Hartley oscillator. The value of capacitance that sets the frequency of the oscillator is the series value of capacitors C1 and C2.

The Colpitts oscillator does not provide as wide a tuning range as the Hartley oscillator. Tuning ratios of 10:1 are common for the Colpitts oscillator.

When UHF signal generation is
continued on page 80

How To Design

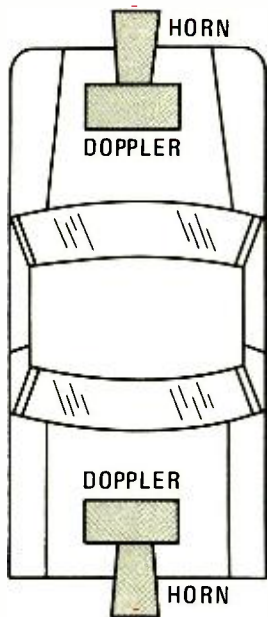

Automotive Anti-Collision Systems

Part II—An in-depth look at the different types of systems and the various design considerations, with enough information for the advanced hobbyist to build his own

MARTIN BRADLEY WEINSTEIN

Last month, in *part I* of this article, we discussed several different approaches to collision-avoidance systems and we looked at practical LASER modules.

This month, the article concludes with a look at SODAR and RADAR modules.

SODAR modules

Headway and tailway range information is obtained through an air-coupled version of SONAR called SODAR (SONic Detection And Ranging). A frequency of 40 kHz should be used for your SODAR for several reasons. One, ultrasonic energies at significantly higher frequencies dissipate rapidly, requiring too much power for useful range. Two, ultrasonic energies at lower frequencies diffuse easily, making beam definition difficult. Further, the wavelength at, say, 23 kHz, is nearly twice the wavelength at 40 kHz. Finally, 40-kHz ultrasonic transducers are readily available.

Because we are dealing with a two-way path (the transmitted signal is reflected, then received), the received echo strength drops with the fourth power of range. This can be combatted in two ways. One is through large transmit power. The other through extra receiving sensitivity.

The rest of the signal processing problem has been greatly simplified, thanks to the National Semiconductor LM1812 Ultrasonic Transceiver IC. This innovative IC is capable of producing up to 12 watts of transmitted ultrasonic power. It works on 12 volts and its output is formatted to make the addition of a clock and gating circuit easy. As shown in Fig. 4 block diagram, very little circuitry outside the LM1812 is required to produce a BCD range output. The LM1812 is available from dealers for \$7.50 to \$10.00.

Though application notes on the LM1812 show a single transducer used for both transmission and reception, system sensitivity can be enhanced through the use of dual sensors. Furthermore, by positioning them far apart on the automobile, a lower range cutoff can be established. (See Fig. 5.) Additionally, the use of separate sensors permits the addition of a receive preamp, if desired, to further enhance received signal sensitivity and reliable system operation at the upper-range limits.

Beam shaping is accomplished for both transducers mechanically, through the use of tubing. The sensors chosen should be waterproof and highly resistant to mechanical and

environmental hazards.

The Massa Corporation (280 Lincoln Street, Hingham, MA 02043) *model TR-89B Type-40* is an excellent choice as a receiving transducer at 40 kHz. Untuned with a 2-megohm load, its sensitivity is a very high—48 dB (versus a standard 1 microbar at one foot). Its directional characteristics are also excellent. They are available from Massa at \$5 each, but Massa has established a minimum sample order of \$25.

The high power requirements of a transmitting transducer are more than met by Linden Laboratories, Inc., (Box 920, State College, PA 16801) *model 70160*. It is capable of handling hundreds of watts of output

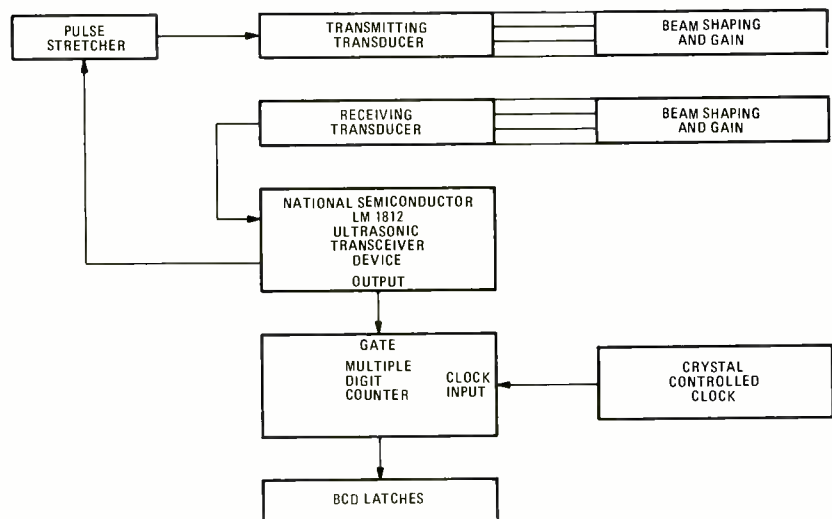


FIG. 4—SODAR MODULE uses a National Semiconductor LM1812 ultrasonic transceiver. The LM1812 provides a gating signal to a counter for accurate range information.

(properly cycled), so at 12 watts it's coasting. It comes in a molded, rugged PVC housing. Its half power (-3 dB) beamwidth is 10 degrees. It is available for only \$23.50, post-paid. This is less than half the usual price of such units in these small quantities.

The entire SODAR system is duplicated twice for full forward and rearward range information. System beamwidth can be anything from 3 to 10 degrees.

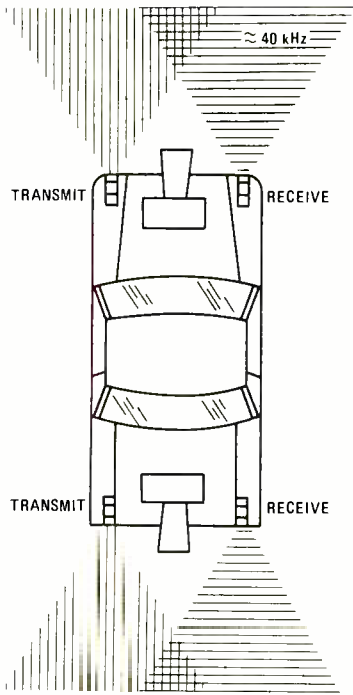


FIG. 5—SODAR MODULE PLACEMENT. Transmitting and receiving transducers are separated as widely as possible. Tubing at the mouth of each transducer can provide a narrow beam.

Doppler RADAR's

Some of the techniques for Doppler measurement have already been mentioned. Here we will take a look at the elements of a practical system that almost anyone can build, as shown in Fig. 6.

Voltage and current regulation is a must. The Doppler microwave modules available use Schottky diode detectors and Gunn diode oscillators. An overvoltage can blow both diodes. An undervoltage can keep the Gunn diode from oscillating—15% regulation is the maximum variation from manufacturer's specs permissible to assure reliable starting and safe operation. Popular, inexpensive three-terminal regulators provide sufficient regulation and help safeguard against potentially dangerous transient spikes.

If the voltage source is modulated at approximately 10 kHz, the Doppler range rate information can be further qualified with a sign, to indicate whether the target is approaching or receding.

The Doppler modules themselves are available from a number of sources. The Amperex Electronic Corp. (230 Duffy Avenue, Hicksville, NY 11802) model *DX-489* Doppler Module, at \$47.50, is a very inexpensive starting point. It includes a built-in 5-dB antenna (which should be replaced with a 14-dB or more antenna), operates on 7.0 volts

and delivers 8.0 mW at 10.525 GHz. As in all the modules we'll discuss, the only connections necessary are power in and signal out. The Amperex *DX-489*, operated as de-

lane traffic. In some cases, the mostatically-controlled heating elements may have to be added for reliable operation in very cold weather.

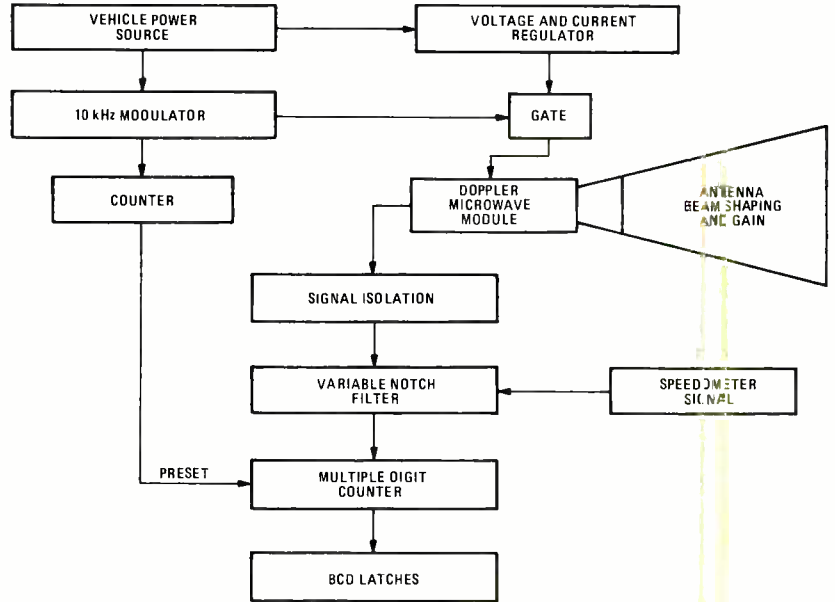


FIG. 6—RADAR MODULE. Information from the speedometer is fed to a filter to eliminate signals returned from stationary objects. The resultant signal is counted and latched for a direct readout of relative velocity.

livered, is designed to meet the requirements of Part 15 of the FCC Rules and Regulations. This is also true of the other modules mentioned. Additional antenna gain, however, can violate Part 15 specifications and the designer is cautioned to observe such limitations in any modification. Amperex modules include built-in second harmonic rejection networks.

Plessey Semiconductors (1674 McGaw Avenue, Irvine, CA 92714) offers a number of Doppler modules near 10.525 GHz (also called X-band). Model *GDM-3B* offers a 10-mW output and a frequency range of 10.2–11.0 GHz for \$77.20. Model *GDM-101B* offers a 50-mW output in the same range for \$88.10. The model *GDVM-3B* offers the same capabilities as the model *GDM 3B*, plus electronic tuning of plus-or-minus 25 MHz, all for \$118.30. The *GDVM-101B* is a similarly-tunable model of the *GDM-101B* for \$154.40.

The General Electric Microwave Devices Products Section (Owensboro, Kentucky 42301) model *C-2126A* Microwave Circuit Module Doppler Transceiver offers a 3-mW output at 10.525 GHz with an 8.0-volt operating requirement. Its flange mount mates with UG39/U flange and RG52 waveguide. It costs \$59.

The audio-frequency output of the Doppler module is buffered in an isolation amplifier. Then a variable-frequency notch filter reduces returns at a frequency related to vehicle speed. A multiple digit plus-and-minus counter with resettable inputs performs the arithmetic conversion to a precise BCD range rate (relative speed) readout, which is latched for display or for software routines.

The modules are placed at the center of the vehicle in both the front and the back as shown in Fig. 7. Antenna gain and directivity is chosen to avoid clutter returns from overhead signs, roadside obstacles and adjacent-

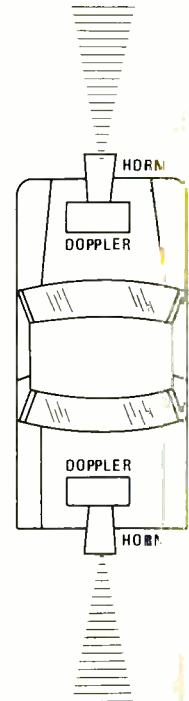



FIG. 7—RADAR MODULES are located fore and aft near the vehicles center line. Nominal 10.525 GHz operating frequency provides operation that is relatively free of bounceback-type interference from rain, snow, dust and other objects.

Microcomputers

The advantages of even simple data processing are obvious. A small, microprocessor-based system can selectively interrogate the various inputs, coordinate data, perform arithmetic and formatting operations, make intelligent decisions and produce a meaningful display.

continued on page 72

Radio-Electronics

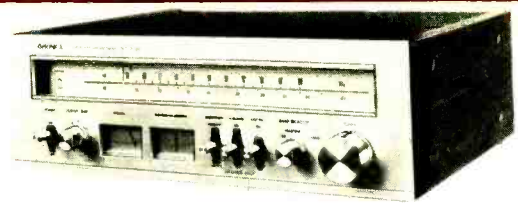

CIRCLE 99 ON FREE INFORMATION CARD

Tests Optonica ST-3535 Tuner

LEN FELDMAN
CONTRIBUTING HI-FI EDITOR



SHARP ELECTRONICS CORPORATION OF JAPAN markets in the US a line of high-fidelity equipment under the name of Optonica. The top tuner in this line is the model ST-3535. The styling is similar to that of several recent tuner and receiver entries from competing firms in that the entire front panel, including the long dial-area cutout is finished in a gold color. When power is applied to the unit, dial

scale numerals illuminate in contrasting green for extremely good visibility. The FM scale is linearly calibrated, with markings at every MHz. Three light indicators to the left of the AM and FM frequency scales show which band has been selected and also denote the reception of a stereo FM signal. The dial pointer is also illuminated with a bright spot of light.

Two framed meters located along the lower section of the panel are shown in Fig. 1, along with other major controls. The meter

at the left serves as a signal-strength meter for AM and FM. The meter to the right is both a center-of-channel FM tuning indicator and a multipath meter. In this latter function, minimum readings are obtained as the FM antenna is rotated, and absence of multipath is indicated by the meter needle returning to its center point, from higher readings to the right of center.

To the left of the meters are a POWER on/off toggle switch and an OUTPUT LEVEL control that alters audio output levels from the pair of variable-output jacks on the rear panel. Three lever switches are located to the right of the meters. The first is a three-position MULTIPATH switch. When moved upwards from its center position, the MULTIPATH switch permits audible detection of multipath distortion. With the lever set to this position, the antenna is rotated until minimum sound is heard. The lower switch setting introduces the meter multipath indicator just described. Next is the HI-BLEND switch that introduces a high-blend circuit for reduction of background noise during weak-signal stereo FM reception. However, this is accomplished at the expense of high-frequency channel separation. In its lower position, the HI-BLEND switch introduces a built-in 440-Hz test signal to the output jacks, which is used in setting record levels on associated tape deck equipment before recording from FM programs. The remaining two-position MUTING switch turns on interstation muting. A rotary selector switch chooses AM, FM-STEREO or FM MONO reception, while a large TUNING knob at the lower right is coupled to a smooth-acting flywheel and the frequency dial pointer.

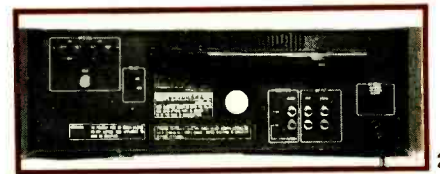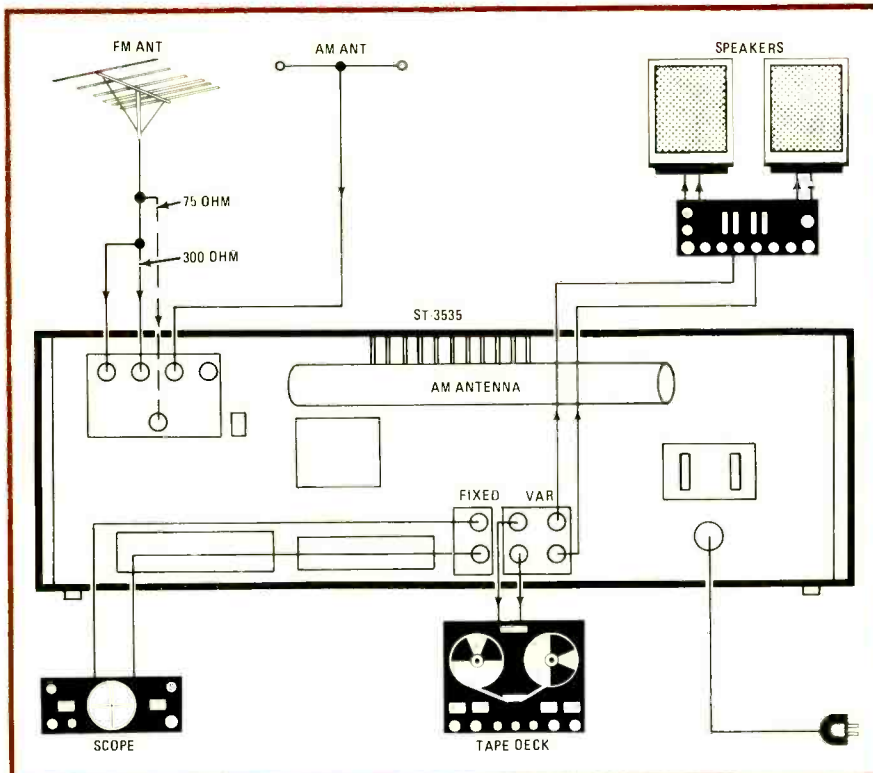

The rear panel of the model ST-3535 tuner, shown in Fig. 2, is equipped with the usual 75-ohm (coaxial), 300-ohm and external AM antenna terminals. An attenuator switch reduces signal input to the RF stage of the tuner in the event of signal overload. In addition to the separate pairs of output jacks for fixed and variable level output, two jacks are provided for connection to an oscilloscope for still a third method of multipath observation and antenna adjustment. An unswitched AC auxiliary power outlet and the usual pivotable AM ferrite-bar antenna plus a fuseholder complete the rear panel layout. Typical connection arrangement into a complete hi-fi system is shown in Fig. 3.

MANUFACTURER'S PUBLISHED SPECIFICATIONS:

FM SECTION:

Usable Sensitivity: Mono: 1.8 μV (10.3 dBf). **S/N Ratio:** Mono: 70 dB. **Selectivity:** 75 dB. **Capture Ratio:** 1.0 dB. **Total Harmonic Distortion:** Mono: 0.2% at 1 kHz; Stereo: 0.4% at 1 kHz. **Image Rejection:** 90 dB. **IF Rejection:** 90 dB. **Spurious Response Rejection:** 90 dB. **AM Suppression:** 50 dB. **Frequency Response:** 40 Hz to 14 kHz, ± 1.5 dB. **Stereo Separation:** 1 kHz: 38 dB at 1 kHz, 30 dB from 50 Hz to 10 kHz.

AM SECTION:

Sensitivity: 200 $\mu\text{V}/\text{M}$ (Internal Antenna). **Selectivity:** 29 dB. **S/N Ratio:** 45 dB. **Image Rejection:** 60 dB. **IF Rejection:** 60 dB. **Total Harmonic Distortion:** 1.0%.

GENERAL SPECIFICATIONS:

Audio Output Level: Fixed, FM: 0.8V; Variable FM: 0–1.0V; Fixed, AM: 0.2V for 30% modulation; Variable AM: 0–0.3V for 30% modulation. **Power Consumption:** 24 watts. **Dimensions:** 17 $\frac{3}{8}$ wide \times 5 $\frac{5}{8}$ high \times 15 inches deep. **Weight:** 22 lbs. **Suggested Retail Price:** \$269.95.

TABLE I
RADIO-ELECTRONICS PRODUCT TEST REPORT

Manufacturer: Sharp (Optonica)

Model: ST-3535

FM PERFORMANCE MEASUREMENTS

	R-E Measurement	R-E Evaluation
SENSITIVITY, NOISE AND FREEDOM FROM INTERFERENCE		
IHF sensitivity, mono: (μ V) (dBf)	1.7 (9.8)	Excellent
Sensitivity, stereo (μ V) (dBf)	6.0 (20.8)	Very good
50 dB quieting signal, mono (μ V) (dBf)	2.5 (13.2)	Excellent
50 dB quieting signal, stereo (μ V) (dBf)	32.0 (35.3)	Very good
Maximum S/N ratio, mono (dB)	76	Excellent
Maximum S/N ratio, stereo (dB)	69	Very good
Capture ratio (dB)	1.2	Very good
AM suppression (dB)	50	Fair
Image rejection (dB)	95	Excellent
IF rejection (dB)	90	Excellent
Spurious rejection (dB)	93	Excellent
Alternate channel selectivity (dB)	75	Very good

FIDELITY AND DISTORTION MEASUREMENTS

Frequency response, 50 Hz to 15 kHz (\pm dB)	2.0	Fair
Harmonic distortion, 1 kHz, mono (%)	0.23	Good
Harmonic distortion, 1 kHz, stereo (%)	0.24	Very good
Harmonic distortion, 100 Hz, mono (%)	0.38	Fair
Harmonic distortion, 100 Hz, stereo (%)	0.30	Good
Harmonic distortion, 6 kHz, mono (%)	0.20	Very good
Harmonic distortion, 6 kHz, stereo (%)	0.30	Excellent
Distortion at 50 dB quieting, mono (%)	0.6	Good
Distortion at 50 dB quieting, stereo (%)	0.4	Very good

STEREO PERFORMANCE MEASUREMENTS

Stereo threshold (μ V) (dBf)	6.0 (20.8)	Very good
Separation, 1 kHz (dB)	40	Very good
Separation, 100 Hz (dB)	34	Good
Separation, 10 kHz (dB)	33	Excellent

MISCELLANEOUS MEASUREMENTS

Muting threshold (μ V) (dBf)	7.0 (22.1)	Very good
Dial calibration accuracy (\pm kHz at MHz)	100	Good

EVALUATION OF CONTROLS,


DESIGN, CONSTRUCTION

Control layout	Very good
Ease of tuning	Excellent
Accuracy of meters or other tuning aids	Excellent
Usefulness of other controls	Excellent
Construction and internal layout	Very good
Ease of servicing	Very good
Evaluation of extra features, if any	Excellent

OVERALL FM PERFORMANCE RATING

Very good

An internal view of the chassis of the model ST-3535 is shown in Fig. 4. The separate, shielded FM front-end at the center-left contains a 4-gang capacitor for FM and uses dual-gate MOSFET's for the double-tuned RF stage and the mixer stage. A three section capacitor is used in the AM section. Phase-linear ceramic filters and differential IC circuitry are used in the IF section (FM) to

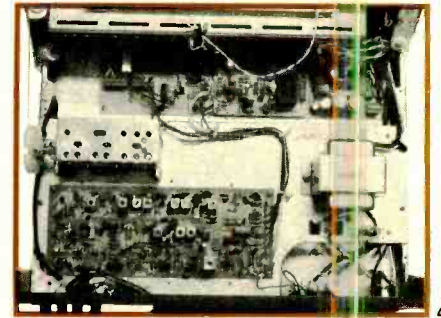

feed a conventional ratio-detector circuit. An IC phase-locked-loop circuit is used for stereo multiplex decoding, followed by a low-pass filter for subcarrier product suppression. The 440-Hz test tone is produced by a two-stage R-C feedback phase-shift audio oscillator circuit. A fully regulated power supply is used to provide operating voltages for the tuner signal sections. Total semiconductor complement includes 2 MOSFET's, 6 IC's, 26 bipolar transistors and 21 diodes. The circuit board wiring is neatly harnessed, and the tuner lends itself to easy servicing and parts identification.

Laboratory measurements

Results of our lab measurements, summarized in Table I, disclose that the unit generally exceeded published specifications. Of course, many of the required new mono and stereo specifications were not listed by the manufacturer despite the fact they proved to be extremely good. For example, a THD figure of only 0.3% at the 6-kHz point tells much about the excellent phase linearity of the IF section and the care with which the multiplex decoder section was designed.

The effectiveness of the low-pass filter was confirmed by the fact that subcarrier rejection in stereo measured more than 54 dB (not listed in Table I). At the point where stereo switching occurred (6 μ V, or 20.8 dBf), quieting in stereo was already 37 dB and distortion was well below the 3% "minimum usable sensitivity point." While frequency response tended to roll off a bit more rapidly than preferred (-2.0 dB at 15 kHz), this is a small price to pay for the excellent subcarrier

TABLE II
RADIO-ELECTRONICS PRODUCT TEST REPORT

Manufacturer: Sharp (Optonica)


Model: ST-3535

OVERALL PRODUCT ANALYSIS

Retail price	\$269.95
Price category	Low/medium
Price/performance ratio	Excellent
Styling and appearance	Very good
Sound quality	Excellent
Mechanical performance	Very good

Comments: Several features included in this well-designed AM/FM stereo tuner set it apart from others in its price class. The built-in 440-Hz test tone is extremely useful in setting up record levels for FM program recording. However, the level of tone delivered is about 3-dB lower than maximum modulation levels of received FM signals would deliver and record level indicators should be set accordingly. The aural method of multipath detection, coupled with the meter indicator, combine to provide an extremely sensitive and accurate means of minimizing this form of interference and distortion. Calibration of the long, linear dial was never off by more than 100 kHz (and even that minimal error occurred only at the low- and high-frequency extremes).

The designers have carefully targeted muting threshold and stereo switching sensitivity so that they provide maximum usefulness. Quieting slope is extremely steep, which results in usable signals being received even when signal strength is under 5 μ V or so for mono, 30 μ V or thereabouts for stereo. The only compromises made in the interest of price are in the less-than-satisfactory distortion levels (which are nevertheless low enough so as not to intrude audibly) and a rather low AM-suppression figure. Neither characteristic impaired listening quality. At its relatively low asking price, the Optonica ST-3535 turns out to be something of a "sleepers" from a company whose reputation was gained in other fields.

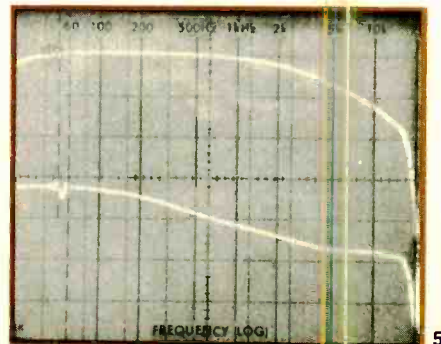

AUGUST 1977


product rejection afforded. Stereo separation was plotted over the entire frequency range by means of our spectrum analyzer. Figure 5 shows the results. Note the steep roll-off action of the low-pass filter in the region of 19 kHz. The upper trace shows the output from the desired channel while the lower trace represents output from the opposite

channel. Each vertical division equals 10 dB.

Our overall product analysis is found in Table II, together with summary comments. For the budget-minded high-fidelity enthusiast who prefers a separate tuner to an all-in-one receiver, the *model ST-3535* offers considerable value and an abundance of

extra features not normally found in lower cost tuners. Unless you are fortunate enough to live in an area where one or more stations are taking special pains to deliver a superclean FM or stereo FM signal, it is unlikely this tuner will prove a limiting factor in determining the quality of your FM reception. **R-E**

Hitachi SR-903 Stereo Receiver

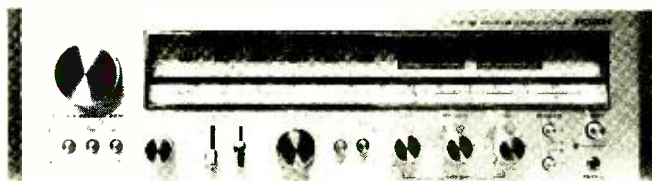

CIRCLE 101 ON FREE INFORMATION CARD

IN THE AUGUST 1976 ISSUE OF RADIO-ELECTRONICS, we described a new type of audio amplifier output circuit developed by Hitachi that was identified as a "Class G" circuit. Hitachi first used this innovative output circuit in their top receiver, *model SR-903* (See Fig. 1). The chief virtue of the Class-G circuit is its increased efficiency (compared with conventional Class-B push-pull output circuitry). The resulting decreased weight and heat-sink requirements, in turn, lead to a more economical design. Indeed, while the *model SR-903* is dimensionally the equal of competitive receivers in the same power class, its net weight and retail asking price suggest that the Class-G approach provides decided benefits.

The front panel of the *model SR-903* is made of gold-anodized aluminum. Frequency numerals are printed on a sloping section behind the dial glass for better visibility, and the linear FM-scale is calibrated at every 200 kHz. Rectangular colored slits above the right section of the dial scale illuminate to show program source selected as well as stereo FM signal reception. Above the left area of the dial scale are signal-strength and center-of-channel tuning meters.

An indicator light labelled AUTO-LOCK is included with the program source indicators and works together with the large tuning


knob at the right of the panel. In FM tuning, a built-in AFC (Automatic Frequency Control) circuit is deactivated so long as your fingers engage the tuning knob. As soon as you approach center-of-channel (as indicated on the tuning meter), releasing the knob permits the auto-lock feature to pull in the station and the then AUTO-LOCK light comes on.

Rotary controls along the lower section of the control panel include BASS, MID-RANGE and TREBLE tone controls; dual concentric balance and click-stop master volume controls; and a rotary program selector switch. The switch has, in addition to its PHONO, AM and AUX positions, a separate FM position and one which combines the FM auto-lock and FM mute features. We would have preferred to see a separate FM muting switch so that the auto-lock feature could be enjoyed with or without interstation muting.

Seven individual pushbuttons take care of low and high filters, speaker A/speaker B selection, stereo/mono selection, loudness control activation and external adaptor switching. Two three-position lever switches handle twin tape-monitoring circuits and tape copying or dubbing. Phone jack and power on/off pushbutton are located at the lower left of the front panel.

Figure 2 is a rear-panel view of the


receiver. Antenna terminals at the left handle 75-ohm, 300-ohm and external AM antenna connections. A swing-out ferrite AM bar antenna is located above the usual input and tape-out pairs of phono-tip jacks with a DIN

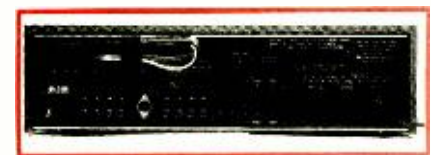

connector also provided for the TAPE I in-and-out connections. Spring-loaded speaker terminals are vertically oriented. One switched and one unswitched AC receptacle, a fuseholder and a chassis ground terminal complete the rear-panel layout. Adaptor in-and-out jacks provide the equivalent of a third tape monitor circuit interruption point.

Circuit features

Four major circuit boards (two are visible in Fig. 3) contain the majority of components used in the receiver. The tuner PC board (see Fig. 3) includes a 4-gang linear tuning capacitor for FM and a 3-section AM tuning gang. A MOSFET is used in the RF amplifier stage. The FM-IF section uses a 4-stage IC differential amplifier with three ceramic filter elements and an IC limiter-quadrature FM detector stage. Phase-locked-loop IC circuitry is used in the multiplex decoder section. Ceramic filtering and IC's are used in the AM tuner section and an IC phono equalizer is used in the low-level preamp stage.

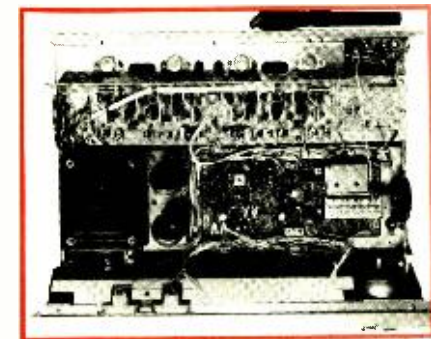

An electronic protection circuit protects speakers and power transistors in the event of a fault, with a relay used to disconnect power applied to the speaker terminals. In the event that the protection circuitry is activated, a

MANUFACTURER'S PUBLISHED SPECIFICATIONS:

FM TUNER SECTION:

Usable Sensitivity: mono: 1.6 μ V (9.3 dBf); stereo: 14 μ V (28 dBf). **50-dB Quieting:** mono: 3.1 μ V (15 dBf); stereo: 34.5 μ V (36 dBf). **S/N Ratio:** mono: 74 dB; stereo: 68 dB. **THD:** mono: 0.15% at 1 kHz; 0.2% at 100 Hz; 0.25% at 6 kHz; stereo: 0.25 at 1 kHz, 0.3% at 100 Hz, 0.3% at 6 kHz. **Frequency Response:** 30 Hz to 15 kHz, \pm 1.0 dB. **Capture Ratio:** 1.0 dB. **Image Rejection:** 85 dB. **IF and Spurious Rejection:** 100 dB. **Selectivity:** 80 dB. **AM Suppression:** 55 dB. **Stereo Separation:** 45 dB at 1 kHz. **Subcarrier and SCA Rejection:** 65 dB. **Muting Threshold:** 14 μ V (28 dBf).

AM TUNER SECTION:

Sensitivity: 300 μ V/M (internal antenna); 20 μ V (external antenna). **Image Rejection:** 70 dB. **IF Rejection:** 90 dB. **Selectivity:** 40 dB. **S/N Ratio:** 50 dB.

POWER AMPLIFIER AND PREAMPLIFIER SECTION:

Power Output: 75 watts-per-channel, minimum continuous, 8 ohms, 20 Hz to 20 kHz. **Rated THD:** 0.1%. **Rated IM:** 0.1%. **Damping Factor:** 45. **Input Sensitivity:** phono: 2.5 mV; high level: 200 mV. **S/N Ratio (A-weighted):** phono: 75 dB; high level: 87 dB. **Tone Control Range:** bass: \pm 10 dB at 100 Hz; treble: \pm 10 dB at 10 kHz; mid-range: \pm 6 dB at 1 kHz. **High Filter:** -8 dB at 10 kHz. **Low Filter:** -8 dB at 50 Hz. **Frequency Response:** high level: 10 Hz to 30 kHz, \pm 1 dB; phono: RIAA, \pm 0.5 dB.

GENERAL SPECIFICATIONS:

Power Requirements: 120V, 60 Hz, 250 watts. **Dimensions:** 19 $\frac{1}{4}$ " wide \times 5 $\frac{1}{16}$ " high \times 15 $\frac{3}{4}$ " deep. **Weight:** 29.8 lbs. **Suggested Retail Price:** \$499.95.

TABLE I
RADIO-ELECTRONICS PRODUCT TEST REPORT

Manufacturer: Hitachi

Model: SR-903

FM PERFORMANCE MEASUREMENTS

	R-E Measurement	R-E Evaluation
SENSITIVITY, NOISE AND FREEDOM FROM INTERFERENCE		
IHF sensitivity, mono: (μ V) (dBf)	1.7 (9.8)	Very good
Sensitivity, stereo (μ V) (dBf)	16.0 (29.3)	Fair
50 dB quieting signal, mono (μ V)	2.6 (13.5)	Excellent
50 dB quieting signal, stereo (μ V)	32.0 (35.3)	Very good
Maximum S/N ratio, mono (dB)	76	Excellent
Maximum S/N ratio, stereo (dB)	70	Excellent
Capture ratio (dB)	1.2	Excellent
AM suppression (dB)	55	Good
Image rejection (dB)	86	Very good
IF rejection (dB)	100	Excellent
Spurious rejection (dB)	100	Excellent
Alternate channel selectivity (dB)	82	Excellent
FIDELITY AND DISTORTION MEASUREMENTS		
Frequency response, 50 Hz to 15 kHz (\pm dB)	1.0	Very good
Harmonic distortion, 1 kHz, mono (%)	0.12	Excellent
Harmonic distortion, 1 kHz, stereo (%)	0.19	Very good
Harmonic distortion, 100 Hz, mono (%)	0.12	Excellent
Harmonic distortion, 100 Hz, stereo (%)	0.25	Good
Harmonic distortion, 6 kHz, mono (%)	0.14	Excellent
Harmonic distortion, 6 kHz, stereo (%)	0.3	Very good
Distortion at 50 dB quieting, mono (%)	0.6	Good
Distortion at 50 dB quieting, stereo (%)	0.38	Very good
STEREO PERFORMANCE MEASUREMENTS		
Stereo threshold (μ V) (dBf)	16.0 (29.3)	Fair
Separation, 1 kHz (dB)	50.0	Superb
Separation, 100 Hz (dB)	40.0	Excellent
Separation, 10 kHz (dB)	42.0	Superb
MISCELLANEOUS MEASUREMENTS		
Muting threshold (μ V) (dBf)	14.0 (28.0)	Fair
Dial calibration accuracy (\pm kHz at MHz)	100	Very good
OVERALL FM PERFORMANCE RATING		Very good

TABLE II

Manufacturer: Hitachi


Model: SR-903

AMPLIFIER PERFORMANCE MEASUREMENTS

	R-E Measurement	R-E Evaluation
POWER OUTPUT CAPABILITY		
RMS power/channel, 8-ohms, 1 kHz (watts)	102	Excellent
RMS power/channel, 8-ohms, 20 Hz (watts)	75	Good
RMS power/channel, 8-ohms, 20 kHz (watts)	77	Good
RMS power/channel, 4-ohms, 1 kHz (watts)	N/A	
RMS power/channel, 4-ohms, 20 Hz (watts)	N/A	
RMS power/channel, 4-ohms, 20 kHz (watts)	N/A	
Frequency limits for rated output (Hz-kHz)	20-22	Good
DISTORTION MEASUREMENTS		
Harmonic distortion at rated output, 1 kHz (%)	0.035	Excellent
Intermodulation distortion, rated output (%)	0.07	Excellent
Harmonic distortion at 1-watt output, 1 kHz (%)	0.01	Excellent
Intermodulation distortion at 1-watt output (%)	0.01	Excellent
DAMPING FACTOR, AT 8 OHMS	45	Very good
PHONO PREAMPLIFIER MEASUREMENTS		
Frequency response (RIAA \pm dB)	0.2	Excellent
Maximum input before overload (mV)	110	Very good
Hum/noise referred to full output (dB) (at rated input sensitivity)	70	Very good
HIGH-LEVEL INPUT MEASUREMENTS		
Frequency response (Hz-kHz, \pm dB)	10-32, 1.0	Very good
Hum/noise referred to full output (dB)	90	Excellent
Residual hum/noise (min. volume), (dB)	90	Good
TONAL COMPENSATION MEASUREMENTS		
Action of bass and treble controls		Good
Action of secondary tone controls		Good
Action of low-frequency filter(s)		Fair
Action of high-frequency filter(s)		Fair
COMPONENT MATCHING MEASUREMENTS		
Input sensitivity, phono 1/phono 2 (mV)	2.6	
Input sensitivity, auxiliary input(s) (mV)	210	
Input sensitivity, tape input(s) (mV)	210	
Output level, tape output(s) (mV)	210	
Output level, headphone jack(s) (V or mW)	62 mW	
OVERALL AMPLIFIER PERFORMANCE RATING		Excellent

small front-panel light located near the power ON/OFF switch becomes illuminated. This light also comes on for the first few seconds after turn-on—the relay prevents output to the speakers, eliminating warm-up thumps and pops from reaching them.

For those who may not have read the earlier description of the Class-G output circuit, here is a brief review: A simplified Class G circuit is shown in Fig. 4. Two transistors are used in each half of the push-pull arrangement for each channel (a total of four transistors in each channel). In Fig. 4, transistor Q2 is powered by the lower of two supply voltages (V1) and amplifies the incoming signal V_{in} until the amplitude of the

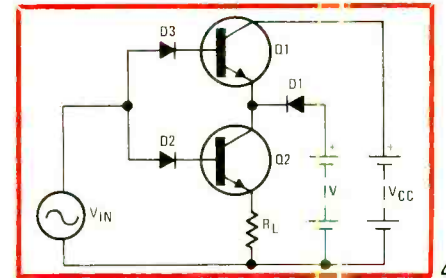

incoming signal exceeds the value of V1. During this time, transistor Q1 is cut off. As the crest of the incoming waveform is reached, signal amplifying is taken over by Q1, powered by the higher supply voltage V_2 , and transistor Q2 is then cut off. Thus, each transistor operates over its most efficient range, thereby increasing efficiency far beyond that attained in conventional Class-B operation. This increased efficiency results in decreased thermal dissipation and decreased heat-sink requirements.


FM tuner measurements

Table I lists the measurements made for the FM tuner. Generally, results equalled or exceeded published specifications, although stereo usable sensitivity was limited by the rather high switching threshold provided between mono and stereo reception. Signal-to-noise ratios at high input signal strengths in both mono and stereo were excellent, and well above ratings. Mono and stereo distortion was as low as in some expensive "separate" tuners. More important, the lowest distortion points were observed with the auto-lock feature engaged, indicating good correspondence between the indicated "perfect" tuning point and actual center-of-channel.

There was good correspondence between the center-of-channel meter indications and the true, lowest-distortion tuning point from one end of the dial to the other. Calibration of frequencies was also extremely accurate. Stereo separation was particularly impressive, especially at the more difficult high-frequency test point of 10 kHz where it remained above 40 dB!

We would have preferred to see a somewhat lower muting threshold setting than the 14 μ V observed, especially in view of the good steep quieting slope of tuner circuit. Of course, for weak signal reception one can always defeat the muting feature, but since it is tied in with the auto-lock setting of the program selector switch, you would also have to forego that feature as well during FM DX'ing.

continued on page 77

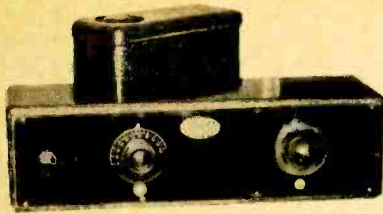

ATWATER KENT model 36, 1927



FRESHMAN MASTERPIECE, 1925



FRESHMAN MASTERPIECE, 1925

Restoring Antique Radios

Antique radios have gained popularity in recent repairing and modifying and how to go

MORGAN E. McMAHON*

THE OLD RADIOS ARE COMING BACK. THOUSANDS of collectors and nostalgia hounds are dragging old sets out of attics, basements and junk shops. You can be the one to make them play again. If you have an old-line repair shop, you can revitalize your business. If you're a hobbyist, you can discover real fun in renovating antique sets. Chances are you'll become an enthusiastic collector yourself.

AC radio sets from 1927 to 1950 are now very popular with collectors, and are in demand by almost everyone as conversation pieces for den or rumpus room. Prices for early AC sets in playing condition run from \$25 to over \$200. Battery sets from the early 1920's command even higher prices, even pre-1951 TV sets are fair game.

Getting Started

What does it take to jump into the hobby or business of renovating antique

*Author-publisher, Vintage Radio Company.

sets? If you're experienced at repairing tube sets you've already got a start. How far you go depends on skills such as refinishing and machine tool operation.


There are really three levels of renovation: **Restoration** requires that the set be brought back to its original condition in every respect, except that the rich luster of the finish, accumulated over the years, is not disturbed unless required. The restorer puts new transformer windings into the old transformer cans, and places new dry electrolytic capacitors in the old wet-filter capacitor cans. The set should be indistinguishable from new, except for the richness of the finish. A true restoration job involves using skills in cabinetry, refinishing, metalworking and electronics.

Repair means to get the set working as it once did, but with possible shortcuts such as hanging electrolytics under the chassis and substituting R-C networks for those hard-to-get transformers. **Modification** involves substituting modern modules, such as transistorized


tuners, for the original (an unpardonable sin to the purist!).

How do you get started? First, you must be competent to do the work. Just because the sets are many years old doesn't mean they're a snap to fix. Next, you need the tools—workbench, testers, circuit references, etc. You must know where to get obsolete tubes and parts. You also have to find the best way to ship sets, as you'll want to work beyond your immediate locale if you want to set up a business. You must advertise your talents and services and set up channels for finding old sets to renovate and sell at a profit.


It's not hard to sell sets to incidental buyers. Try local antique and collectibles dealers, and the new "funky things" shops. An exhibit of your own helps. However, your best bet may be with more serious collectors who don't have the time or resources to restore their acquisitions. If you become *the* restorer for collectors in your area, you're pretty well set.

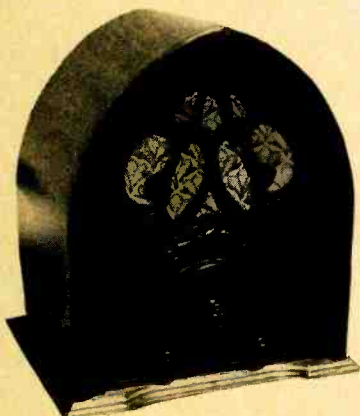

1933 AUDIOLA

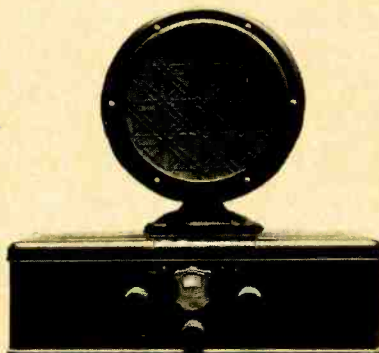


ATWATER KENT model 55, 1929

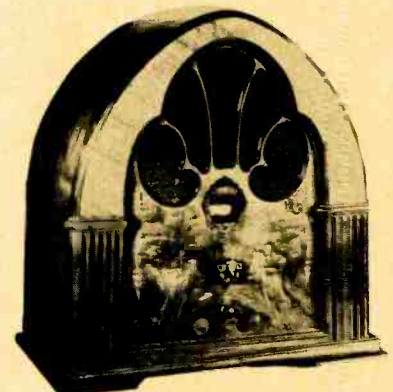


PHILCO CORP. model 90B, 1931



RCA model 95T5, 1938

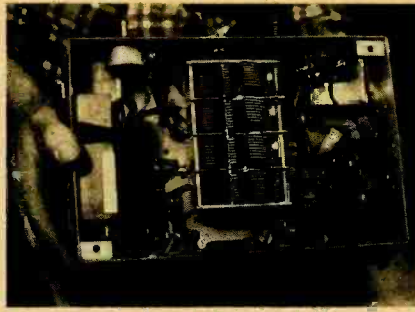

JACKSON BELL CHASSIS, 1932

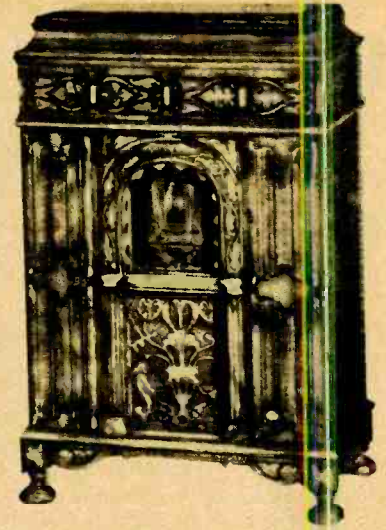

ZENITH model 75 Radio Phonograph, 1930

How to get started

years. Here's a look at what's required in restoring, about obtaining parts and schematics

Clubs and periodicals

To tap the collector community, start by reading the same books and periodicals as they do, and by getting to know the local or regional collectors' clubs. Start with the Vintage Radio Company books; write to Vintage Radio, Dept. P, Box 2045, Palos Verdes, CA 90274 for information. The volume of key interest to you is *A Flick of the Switch*. The 1887-1929 counterpart to this book is *Vintage Radio*.

There are some periodicals devoted entirely to radio collectors. *The Horn Speaker*, 9820 Silver Meadow Dr., Dallas, TX 75217, is a monthly newspaper for collectors and historians. Other collector newsletters are: *Radio Age*, 1220 Meigs St., Augusta, GA 30904; *Antique Radio Topics*, Box 42, Rossville, IN 46065; and the *Classic Radio Newsletter*, Box 28572, Dallas, TX 75228. A good directory of publications and of hard-to-get parts and services is available from Historical Radio Services, Box 15370, Long Beach, CA 90815.

Historical radio clubs are your best doors into the collector community. The Antique Wireless Association and the Antique Radio Club of America are national, and there are also regional clubs. In Canada the Canadian Vintage Wireless Association is the key organization.

Your other main need is for circuit-diagram references. Rider's *Perpetual Trouble Shooter's Manuals* cover sets from the mid-1920's to the 1950's. Howard W. Sams' *Photofacts* give detail on sets built after 1945. Morris Beitman's *Most-Often-Needed Circuit Diagrams* books are still available from Supreme Publications, 1760 Balsam

ANTIQUE RADIO CLUBS

Antique Radio Club of America
c/o Mr. Bill Denk
81 Steeplechase Rd.
Devon, PA 19333

Antique Wireless Association
c/o Mr. Bruce Kelley
Main St.
Holcomb, NY 14469

Buckeye Antique Radio and Phonograph Club
c/o Mr. Ken Longenecker
1937 Stoney Hill Dr.
Hudson, OH 44236

California Historical Radio Society
c/o San Jose Historical Museum
635 Phelan Ave.
San Jose, CA 95112

Canadian Vintage Wireless Association
c/o Mr. Sid Prior
102 Parkhurst Blvd.
Toronto, Ontario, M4G 2E6
Canada

Indiana Historical Radio Society
c/o Mr. Ed Taylor
245 N. Oakland Ave.
Indianapolis, IN 46201

Mid-America Antique Radio Club
c/o Dr. Robert Lane
2301 Independence Ave.
Kansas City, MO 64214

Northwest Vintage Radio Society
Box 13544
Portland, OR 97213

Rocky Mountain Antique Wireless Association
16500 W. 12th Dr.
Golden, CO 80401

Southern California Antique Radio Society
c/o Mr. Alan Smith
6712 Bisby Lake Ave.
San Diego, CA 92119

Southwest Vintage Radio and Phonograph Society
Box 19406
Dallas, TX 75219



ATWATER KENT model 35, 1926

Rd., Highland Park, IL 60035. Gemsback Publications' *Official Radio Service Manual* covers the period from the mid-1920's through 1935. Vintage Radio Company provides a circuit research service in which the schematic diagram and other available information on any pre-1951 radio set will be sent for \$3.50.

You can help preserve radio history and have some fun at the same time; and if you're interested, earn some money in the process.

service clinic

Double, double, toil and trouble. Overlook the obvious and don't believe the evidence. JACK DARR, SERVICE EDITOR

THIS IS A GOTHIC TALE OF MYSTERY, HARDSHIP, frustration and suffering. There is a happy ending, but one that would amaze Alfred Hitchcock. What? Certainly; it's an intermittent; what else could it be?

Synopsis. Technician makes house call on Quasar TS-941. Complaint: raster folds over in center, darkens and goes out, after about 15 minutes. Tapping on cabinet will bring it back. Verified by observation. So, technician installs new FC panel.

Symptoms remain exactly the same. Take set to shop. On the way, pick up another set, same chassis. Hook set No. 2 up, and it shows exactly the same symptoms. (***** This denotes lapse of two days.)

Concentrating on first set, the problem seems to be in the flyback, since the FC module has been replaced, and it contains all of the rest of the circuitry.

Tapping the flyback, moving the leads, etc., does nothing. Bending the end-plate of the chassis up and down will make the raster go out, or come back if it's out. Tapping the module will make it go out sometimes. (***** Two more days, not continuously, half an hour at a time.)

During this time Visiting Expert (sic!) has been passing through shop, observing (but not helping much). Temptation too much; V. E. breaks down and says "Drive this thing into my place and let's see what's going on." No sooner said than done.

Now both of us start in on it. We agree that it has to be a bad solder joint somewhere, since it has all of the typical symptoms. Also it is thermal, since it will show up by itself after a short time. However, we are unable to locate that place where only a very light tap will make it act up. To make life more

interesting, now it develops a new failure mode. In this one, the raster goes out instantly. Once again, tapping or bending the chassis will bring it back.

Transcription of V.E.'s bench notes (somewhat edited and highly expurgated).

"Two failure modes with same result. Has to be bad solder joint from symptoms. Monitor things. The scope shows that the base drive waveform on the horizontal output transistor does not disappear, but just changes shape slightly. Perfect square wave in fault condition, 15 volts p-p (Fig. 3-a); in operation, normal waveform as shown in Fig. 3-b.

"However, different reactions on collector current of output transistor. Monitored by reading DC voltage drop across R805/R806, 5 ohms each, in the +73 volt supply that feeds the flyback primary. In Mode 1, foldover and fade, the collector current rises slowly from the normal 700 mA to 1.0 amps or more (at which time the plug is pulled!)

"In Mode 2, instant disappearance of raster, the collector current drops to zero

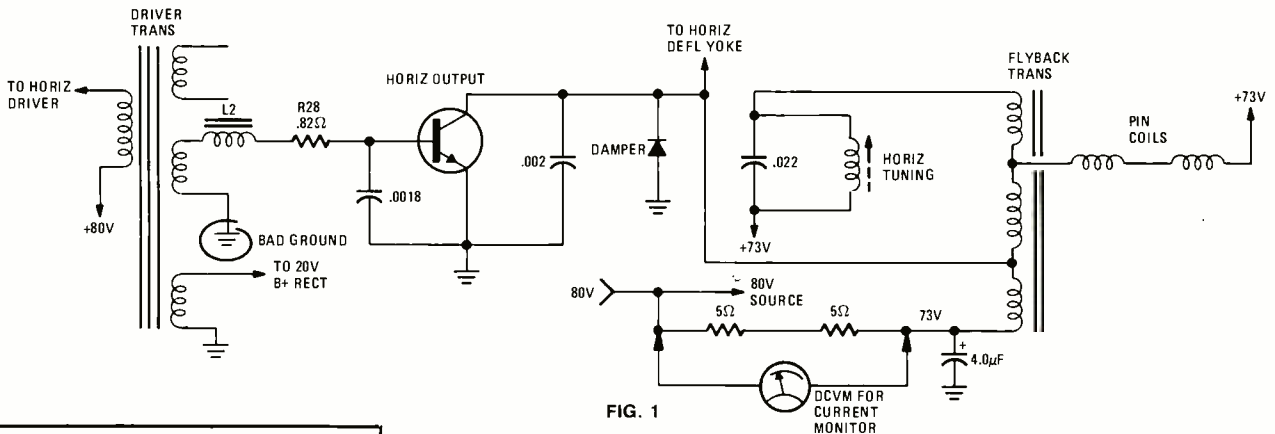


FIG. 1

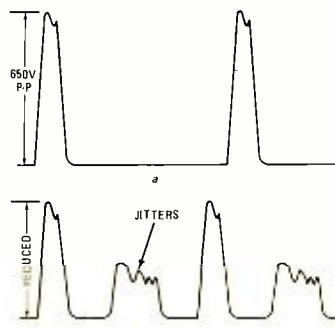


FIG. 2

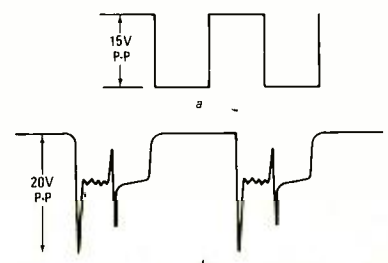


FIG. 3

This column is for the service technician's problems—TV, radio, audio or industrial electronics. We answer all questions submitted by service technicians on their letterheads individually, by mail, and the more interesting ones will be printed here.

If you're really stuck, write us. We'll do our best to help you. Don't forget to enclose a stamped, self-addressed envelope. If return postage is not included we cannot process your question. Write: Service Editor, Radio-Electronics, 200 Park Avenue South, New York, NY 10003

and the collector voltage rises to the supply value of +80 volts. In Mode 2 (using the other channel of the scope) the collector pulse drops to zero. In Mode 1, the height of the pulse drops, and another smaller pulse shows up halfway between the normal pulses; this jitters very badly (Fig. 2). Either condition can be induced by bending the end-plate of the chassis.

"Now, some conclusions were made. From the complete loss of the collector current in No. 2, we decided that the emitter of the output transistor could be opening. This was eliminated by grounding the emitter with a clip-lead in the fault condition. No result. The flyback was still suspect, since a new module had made no difference at all.

"Resistance tests showed nothing out of order. Reading primary resistance from B+ to collector showed no change when the chassis was tapped or the plate bent. Since this circuit uses a three-branch parallel-feed for the collector circuit, this one was discarded as unlikely. (**** One more day.)

"The output transistor was not conducting at all in fault condition, Mode 2. This was not a loss of drive, since the monitor showed no change at all. That is, aside from the change from a normal waveform to the square wave. We could tell when it was in or out by watching this. We still could not find that sensitive

point where a slight tap would make it cut in and out.

"A belated reading of the base voltage of the output transistor showed that in operation it was normal at a -1.2 volts. In fault condition this jumped to a -6 volts. Now we knew! The complete loss of collector current was due to the transistor being firmly cut off. At this point, Colleague happily went out on a service call, saying that he had to do something to make a living.

"So try something new; think! This wasn't loss of drive, but it was something that affected the bias. The base circuit was very simple (Fig. 1). The socket terminal (which had been cleaned and checked, with the rest, as the first step), a 0.82-ohm resistor, a tiny choke, and the secondary winding of the driver transformer. Taking the module out, this circuit was checked. All solder joints looked good, and the continuity checked out.

"Keep thinking: If the hot end of this winding opened, we'd lose the drive waveform on the base. However, if the ground end was opening, this would leave the base floating, and could result in the kind of bias change we were seeing. Replace module. Turn on. Works. Using long thin plastic screwdriver, carefully move the two terminals of the secondary, which

continued on page 66

*** SAVE GAS! SAVE on TUNE-UPS!**
MODERNIZE and Bring Your Car "UP-TO-DATE"
with the MOST EFFICIENT Ignition ever invented!



ALLISON XR-700
* The "XR-700" is a COMPLETELY NEW Ignition System that replaces the inefficient Breaker Points and Condenser with a highly RELIABLE, Invisible "Infra-red" Light-Beam which CONTROLS the Latest design Solid-State POWER MODULE. This new "Patented" Invention produces the HIGHEST ENERGY, Longest Duration Spark of ANY Ignition System manufactured TODAY!

* CUSTOMERS REPORT: "THE XR-700 MORE THAN PAYS FOR ITSELF...and KEEPS ON SAVING MONEY with..."

- ★ INCREASED "GAS-MILEAGE" up to 30%!
- ★ ELIMINATING COSTLY "TUNE-UPS"!
- ★ IMPROVED ENGINE PERFORMANCE!
- ★ QUICKER STARTING IN ANY WEATHER!
- ★ FASTER ACCELERATION...SMOOTHER RUNNING!
- ★ PLUGS LAST UP TO 4-TIMES and LONGER!

* THE XR-700 has NO moving parts to wear out...never needs adjustment! Engineered to OUTLAST Your Car. So RELIABLE... So PERFECT...that we give you a LIFETIME WARRANTY... "FREE Repair or Replacement" for as long as you OWN the Unit... even if you change Cars, we will supply the necessary Parts FREE.

- * FITS ALL ENGINES... Domestic or Foreign... 4, 6 or 8-Cylinder
- * EASY INSTALLATION... Completely Factory ASSEMBLED!

Thousands sold at \$59.95

*** NOW... ONLY... \$39.95** (Plus Res. add Tax)
THAT'S EVERYTHING... INCLUDING POSTAGE & INSURANCE

* SAVE! ORDER FACTORY DIRECT!
Send Check or M/O, State Car Make, Year and No. of Cylinders.

* MASTERCHARGE or BANKAMERICARD Cardholders
Order by TOLL FREE PHONE (800) 423-6525 Ext. 3

CALL or WRITE for FREE BROCHURE

* America's Oldest and Largest Manufacturer
of Opto-Electronic Ignition Systems. Ⓞ

ALLISON AUTOMOTIVE CO.
1267 - RL, East EDNA PL., COVINA, CALIF. 91722

CIRCLE 14 ON FREE INFORMATION CARD

ok wire wrapping center ok

NEW HOBBY WRAP MODEL BW 630




Battery wire wrapping tool
\$34.95
ONLY \$34.95 (plus shipping)
COMPLETE, WITH BIT AND SLEEVE

STRIP/WRAP/UNWRAP MODEL WSU-30




\$5.95*

RIBBON CABLE ASSEMBLY



DIP SOCKETS



DIP IC INSERTION TOOL WITH PIN STRAIGHTENER



MODEL INS-1416


\$3.49*

WIRE DISPENSER MODEL WD-30-B




\$3.45*

PRE-CUT PRE-STRIPPED WIRE



WIRE WRAPPING KIT



\$15.45*

*MINIMUM ORDER \$25.00, SHIPPING CHARGE \$1.00, N.Y. CITY AND STATE RESIDENTS ADD TAX

OK MACHINE AND TOOL CORPORATION

3455 CONNER STREET, BRONX, NEW YORK, N.Y. 10475 U.S.A.
PHONE (212) 994-6600 TELEX NO. 125091

CIRCLE 44 ON FREE INFORMATION CARD

www.americanradiohistory.com

Should your career in electronics go beyond TV repair?

**CREI prepares you at home
for broader and more advanced
opportunities in electronics —
plus offers you special arrangements
for engineering degrees**

There is no doubt television repair can be an interesting and profitable career field. TV repair, however, is only one of the many career areas in the fast growing field of electronics.

As an indication of how career areas compare, the consumer area of electronics (of which TV is a part) makes up less than one-fourth of all electronic equipment manufactured today. Nearly twice as much equipment is manufactured for the communications and industrial fields. Still another area larger than consumer electronics is the government area. That is the uses of electronics in such areas as research and development, the space program, and others.

Just as television is only one part of the consumer field, these other fields of electronics are made up of many career areas. For example, there are computer electronics, microwave and satellite communications, cable television, even the broadcast systems that bring programs to home television sets.

As you may realize, career opportunities in these other areas of electronics are mostly for advanced technical personnel. To qualify for these higher level positions, you need college-level training in electronics. Of course, while it takes extra preparation to qualify for these career areas, the rewards are greater both in the interesting nature of the work and in higher pay. Furthermore, there is a growing demand for personnel in these areas.

Unlike most other home study schools, CREI programs are devoted exclusively to preparing you for careers in advanced electronics. All of CREI programs are college level. And CREI gives you both theory and practical experience in advanced electronics.

Unique Design Lab

A unique feature of CREI training is its Electronic Design Laboratory Program, which trains you to actually design circuits. It also helps you understand the theories of advanced electronics and gives you extensive practical experience in such areas as tests and measurements, breadboarding, prototype construction, circuit operation and behavior, characteristics of electronic components and how to apply integrated circuits.

Career Training at Home

Only CREI offers this unique Lab Program. It is a complete college lab and, we believe, better than you will find in most colleges. The "Lab" is one of the factors that makes CREI training interesting and effective. And the professional equipment in this program becomes yours to keep and use throughout your professional career after you complete the training.

Engineering Degree

CREI offers you special arrangements for earning credit for engineering degrees at certain colleges and universities as part of your home study training program. An important advantage in these arrangements is that you can continue your full time job while "going to college" with CREI. This also means you can apply your CREI training in your work and get practical experience to qualify for career advancement.

Wide Choice of Programs

CREI gives you a choice of specialization in 14 areas of electronics. You can select exactly the area of electronics best for your career field. You can specialize in such areas as computer electronics, communications engineering, microwave, CATV, television (broadcast) engineering and many other areas of modern electronics.


FREE Book

In the brief space here, there isn't room to give you all of the facts about CREI college-level, home study programs in electronics. So we invite you to send for our free catalog (if you are qualified to take a CREI program). The catalog has over 80, fully illustrated pages describing your opportunities in advanced electronics and the details of CREI home study programs.

Qualifications

You may be eligible to take a CREI college-level program in electronics if you are a high school graduate (or the true equivalent) and have previous training or experience in electronics. Program arrangements are available depending upon whether you have extensive or minimum experience in electronics.

Send for this FREE Book describing your opportunities and CREI college-level programs in electronics

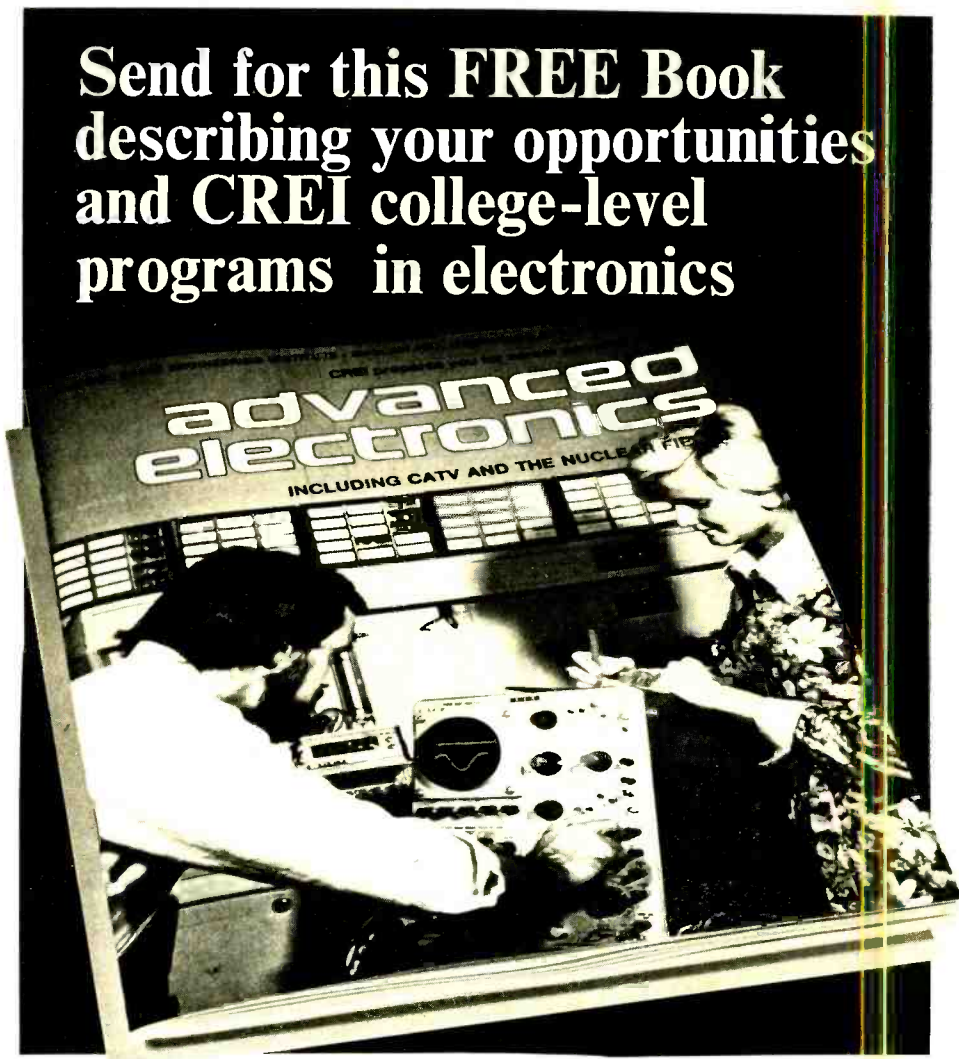

Mail card or write describing qualifications to

CREI **CAPITOL
RADIO
ENGINEERING
INSTITUTE**

McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue Northwest
Washington, D.C. 20016

Accredited Member National Home Study Council

GI Bill

CREI programs are approved for training of veterans and servicemen under the G.I. Bill



SERVICE CLINIC

continued from page 61

were barely reachable from outside. There it was! Only a very small movement would make it cut in and out. Here was the sensitive point we'd been looking for so long.

"Remove module; disassemble. Take out large electrolytic capacitor that blocked access to terminals of driver transformer. Check solder joints; look good. Resolder anyhow. Replace capacitor, reassemble. Look at solder joints on PC board, for same winding. These too looked good; resolder them anyhow. Replace module; turn on. Bend board; hit terminals. Nothing; it works. Leave note for colleague, telling what had been done, then go home and feed horse." (End of bench note transcriptions.)

Next morning; came into shop, and (being a realist) asked "When did it cut out?" Colleague says; "It didn't!" Complete amazement. Then he said "Come here. I've got something to show you." He handed me the other two FC modules and my 6-power loupe. "Look

at the ground pin joint on that secondary winding." A very close examination showed that *both* of these had an almost invisible crack around the transformer-lead joint. Obviously, the one in the set had had one too.

There's the Alfred Hitchcock aspect. By an amazing combination of coincidences, three modules had developed exactly the same fault. This included the one in his kit! So, when the module was changed with no results, the other assumption was quite normal.

Conclusion, using perfect 20-20 hindsight: by taking readings, and observation, we had arrived at the point where the fault was located; the base circuit of the horizontal output transistor. Due to the drive waveform, we had been a day late in checking the DC voltage on the base.

This, of course, was the key clue, along with the drive waveform. It was pointing directly to the solder joint that was causing the trouble. Back-checking, with one of the bad modules, we found that while the peak-to-peak voltage and waveform did stay the same, the DC

level of the top of the waveform was zero volts. We were driving an NPN transistor with what actually was a series of negative-going pulses. This caused the transistor to cut off completely.

We accounted for Mode 1, where the extra pulses appeared and the current increased, by deciding that this could be due to the bad joint arcing intermittently, so that the stage was double-triggering; some sort of screwball feedback loop, and it was trying to go into parasitic oscillation.

Such a combination of contradictory symptoms, plus the unbelievable coincidence of having three modules with identical defects made this one a little hard to pin down. The defect in this set certainly isn't typical of Quasar sets, and it was finally located by persistence and logic. If there is a moral, it would probably be "Keep on keeping on!"

R-E

reader questions

TRACE OFF-CENTER

The trace is way off center in this scope. It's one I built some years ago from a correspondence course. It is an RCA. The trace is far too high and I can't get it down. If I disconnect the vertical deflection-plates on the CRT, the trace centers. The tubes seem to be OK. I get +400 volts on one plate of the 12AU7 vertical output tube, and only +200 volts on the other plate. At this point I don't know what to do. It's probably simple.—A.A. San Diego, CA.

You have found the cause; the DC plate voltages on the output tube must be the same, and they're not. Note that the plate voltage of the pentode section of the 6BL8 is also off. Since this is directly coupled to the grid of one triode in the 12AU7, this is upsetting the bias. Try a new 6BL8 tube and check all of the resistors in this circuit for drift in value. Be sure to read the grid and cathode voltages; these are clues.

WEAK COLOR

Here's a cute one. This Admiral 2K2084 had very weak color. All of the color circuitry voltages and resistances were within tolerance. Even the chroma amplifier stages looked OK on a sweep test though the chroma curve had an extra hump at a higher frequency.

Turning the chroma take-off coil core produced nothing. Checking the coil showed it was open: the wire had been pulled too tight when it was soldered. Repaired this, and everything went back to normal.

Thanks to Louis R. Supek, Brunswick, OH, for this one.

continued on page 68

Deal Yourself in...



SPECIAL REDUCED TRAVEL RATES FROM THE WEST AND MIDWEST, CONTACT: Dawn Corrigan, Seven Seas Travel 17220 S. Norwalk Blvd. Cerritos California 90701 213-924-8383

Atlantic City, N.J.
August 27th-28th

What its all about!

Software Development
Micro Computers
Hardware Development
Disc Memories
Computer Comparisons
Interfacing
Program Implementation
AMSAT
Computerized Music
Video Terminals
Kit Construction
Printers
Computer Games
Digital Tapes

- Seminars and Technical talks by leading electronic equipment manufacturers
- Major Exhibits from all over the country
- Demonstrations in many areas including Home and Personal Computing
- Door Prizes, Free Literature and Free Mementos
- All this plus Sun and Surf - Fun and Excitement - Relaxation and Leisure


Personal
Computing
77 Consumer Trade Fair

LOCATION: SHELBURNE HOTEL ON THE BOARDWALK at MICHIGAN AVE, P.O.Box 1138, ATLANTIC CITY, NEW JERSEY 08404.

TICKETS FOR THE WEEKEND: INCLUDES EXHIBITS AND SEMINARS ON AUGUST 27-28th are: \$10.00 at the door; or ORDER BEFORE AUGUST 10th and SAVE 20% and NO WAITING IN LINE!

SEND CHECK TO "PERSONAL COMPUTING 77"
Rt 1, Box 242, Mays Landing, N.J. 08330

For tomorrow's needs, two new Fluke counters—today.

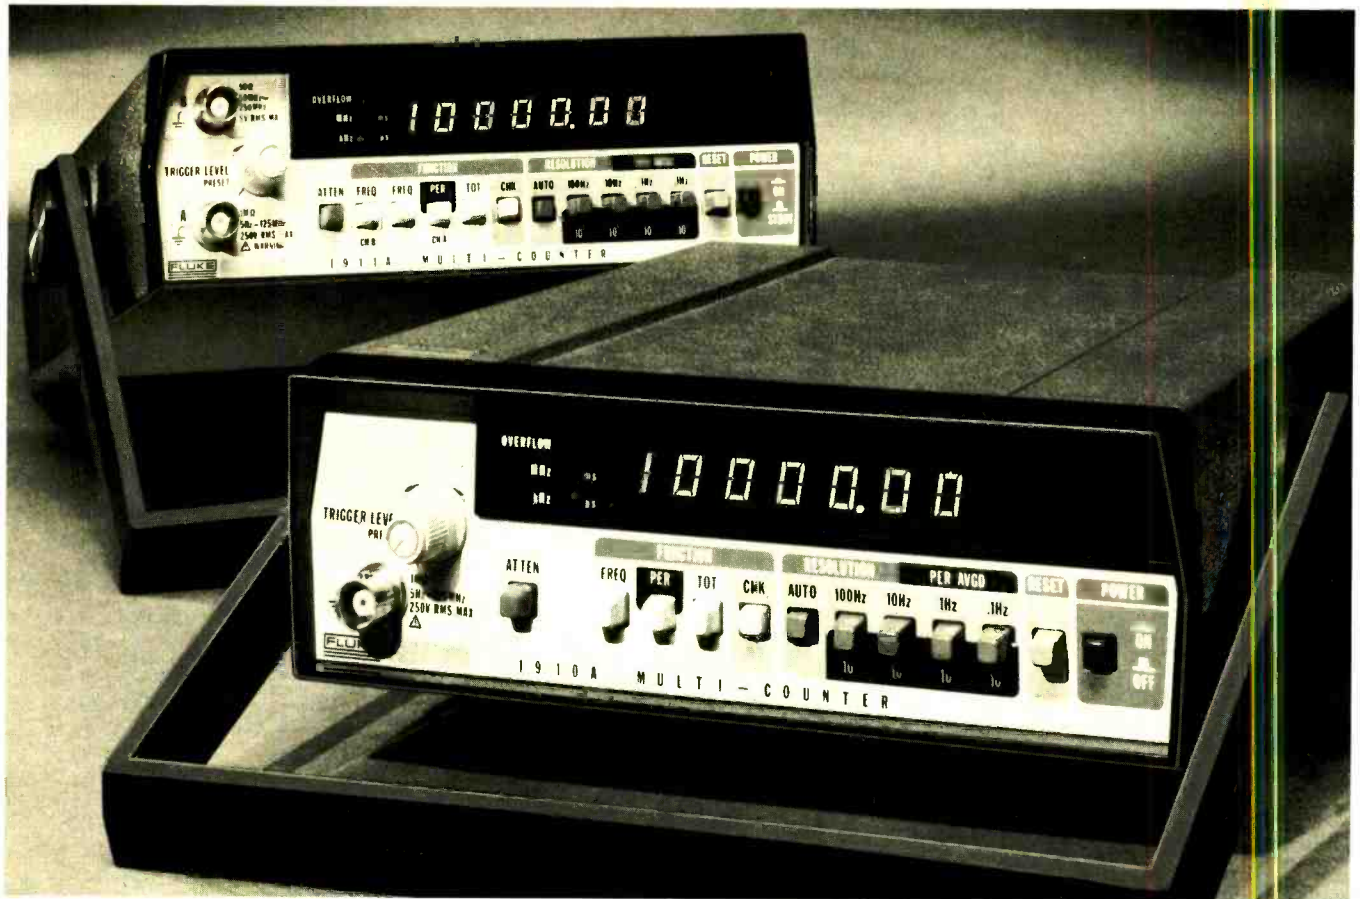

The 1910A and 1911A: counters with confidence in *your* future.

You can't always plan for tomorrow's measurement needs. That's why you should select the *Fluke* 1910A or 1911A counter—and receive frequency, period, period averaging, totalize—and many other new features—for as little as \$395!*

Stack up the features—not the instrument.

Most counters available at this price offer frequency only. If you need more, you have to move up to a higher-priced line. With *Fluke*, there are no future units to buy, stack, or gather dust.

If you've considered a counter that doesn't offer traditional *Fluke* quality and capability, it doesn't stack up. The new multi-function 1910A/1911A are very simple to use—not simpleminded. Extras like autoranging to fill all the digits. Automatic or manual range selection. Measurements are displayed clearly and accurately—the first time. And, any range or function control you select will automatically reset your counter.

Trigger-level control at these prices? You bet, and it adds to *your* performance. Self-check. Pack it anywhere (with the battery option). Want to print out data that's hard to refute? Look at the -02 option that allows you to connect the 1910A/1911A to your printer.

Consider the alternatives.

Select the 1910A for true multi-function value, or the 1911A for wider frequency (250 MHz, 50Ω!) applications. Once you've examined the best in this price range, you'll

agree you need to plan for your future with *Fluke*.

Please call 800-426-0361 toll-free for technical data and the name of the *Fluke* office or representative close to you. Or, write: John *Fluke* Mfg. Co., Inc., P.O. Box 43210, Mountlake Terrace, WA 98043. In Europe: *Fluke* (Nederland) B.V., P.O. Box 5053, Tilburg, The Netherlands. Phone: (013) 673973. Telex: 52237.

*U.S. Price Only.

The Good vs. The Good

Feature	Fluke 1910A	2nd choice	Fluke 1911A	2nd choice
• Price:	\$395*	vs. \$295	\$495*	vs. \$495
• Range:	125 MHz	vs. 80 MHz	250 MHz	vs. 25 MHz
• Sensitivity:	15 mV /25 mV	vs. 25 mV /50 mV	15 mV /30 mV	vs. 25 mV /50 mV
• Trigger-level control:	Yes!	vs. (sorry)	Yes!	vs. (sorry)
• Autoranging:	Yes!	vs. (sorry)	Yes!	vs. (sorry)
• Battery Option:	Yes!	vs. (sorry)	Yes!	vs. (sorry)
• Multi-function:	f, p, pa, tot.	vs. f only	f, p, pa, tot.	vs. f only

READER QUESTIONS

continued from page 66

MISMATCH

I got this Admiral 1K2084-2 chassis with a vertical problem; half of the deflection yoke had opened. I replaced it with a Thordarson Y-109. Now I have other problems. There's a damped sinewave look to the scanning lines on the left side. The high voltage is low and the width is narrow. Vertical linearity at the top isn't good. I've checked several things with no luck. Any suggestions?—H.G., Hudson, MA.

Your new set of symptoms are the classical symptoms of horizontal deflec-

tion yoke mismatch. According to the Thordarson catalogue, the correct deflection yoke for this one should be a Y-131. The Y-109 is listed as an RCA replacement. The Y-131 is shown as an exact replacement.

COLORED LINES

The vertical sweep and sync are good on this Zenith 19FC45, but I see several horizontal lines of various colors at the very top. I don't think these are retrace lines. Can't find a way to get them out.—A.T., Roseville, MN.

These probably are the VITS reference signals, which do have assorted color signals in them. The most likely

cause for this would be some kind of oddball problem in the retrace blanking. Check the vertical blanker transistor. If it checks good, try a new one just for luck. May not be cutting off as sharply as it should.

(Feedback: "This transistor tested good in and out of circuit. So, I replaced it and cured the problem. How about that?")

THIN VERTICAL LINE

All I can get on this Broadmoor TV set, sold by K-Mart, is a bright, thin vertical line in the center of the screen. No sound. Can't find a listing on this is Sams.—W.D., Mission Viejo, CA.

The latest Sams Index shows a Broadmoor 7212WA, 1543-1. This should be close to the one you have. The thin vertical line could be due to an open yoke-return capacitor. Since the deflection yoke and high-voltage supply in solid-state TV sets are usually in parallel across the horizontal output transistor, should this capacitor open, you'd still have high voltage but no horizontal deflection. This is a 0.22 μ F capacitor.

The sound problem could be due to a bad IC or audio output transistor. Check all of the DC voltages around the IC. If any of them are quite a bit off, chances are that the IC is bad.

GREEN SCREEN

The screen on this RCA CTC-59 has a greenish tint, both on color and b-w pictures. The screen and drive controls act very oddly. I can't get the blue to react properly.—C.K., Kenmore, NY.

See if you can get setup lines on all three colors in with the service switch in the service position. If so, then the picture tube is good. A greenish tint can be due to excess green or not enough blue. If your blue setup controls do not show a normal reaction, try this: All three of the MAD-1 video drivers are the same. Try swapping the blue one with either the red or green and see if your symptom changes color. If it does, you have a bad transistor or some problem in that MAD-1 module.

OLD RASTER

The bottom corners of the raster on this Zenith 20Y1C48 pull in. If I turn the brightness and contrast all the way up, they almost fill the screen. The high voltage is OK and the tubes have been substituted. Any ideas?—E.C., Los Angeles, CA.

There's one thing that might do this. Check the 30- μ F capacitor on the screen grid of the 6HE5 vertical output tube. This is not the screen bypass capacitor; that's the 10 μ F unit. The 30- μ F is actually part of the pincushion correction circuitry. If it opens, you will see what looks a good deal like a keystone raster. (Quite a few good deflection yokes have been replaced for this symptom!) R-E

ARE YOU READY TO RECEIVE THE WORLD?

ALL NEW fully synthesized DR22 Receiver general coverage receiver from McKAY DYMEK \$995.



FEATURES

- Shortwave, CB, ham radio, ships at sea, overseas phone calls, etc.
- Hi Fi, SWL, commercial, industrial and government uses.
- High level RF front end for excellent intermodulation rejection and sensitivity.
- Crystal filters in first and second IF amplifiers, ceramic filter in third IF.
- Quartz crystal tuning accuracy at all frequencies, no crystals to buy.
- Built in power supply for 110-120 or 220-240 VAC switchable, 50-60 Hz.
- Solid state, phase locked, digital synthesis tuning.
- Extreme ease of tuning at all frequencies.
- No mechanical tuning dial error or backlash.
- Switch selectable 4 or 8 kHz RF bandwidth.
- Built in monitor speaker with external speaker connectors.

SPECIFICATIONS

Frequency coverage:	50 kHz to 29.7 MHz, continuous. Digital synthesis in 5 kHz steps, fine tune for ± 5 kHz.			
Reception modes:	AM, upper sideband, lower sideband, CW.			
Sensitivity for 10 dB S + N/N:	100 kHz	200 kHz	300 kHz-20MHz	20-29.7 MHz
	CW, SSB AM	10 μ V 30 μ V	2.0 μ V 6.0 μ V	0.5 μ V 1.0 μ V 1.0 μ V 2.0 μ V
RF Bandwidth:	-3dB @ 4 kHz or 8 kHz, and -60dB @ 10 kHz or 14 kHz			
Dimensions & Wt.:	(W x D x H) 17.5 x 14.5 x 5.1 inches. Shpg. Wt. 19 lbs.			

DR22 features and specifications unmatched under \$2900.



McKay Dymek Co.
675 N. Park Ave.
P.O. Box 2100
Pomona, CA 91766

Order factory direct, call toll free today. Exclusive rent/own plan available.



Nationwide
800/854-7769
California
800/472-1783

In Canada:
Great Metropolitan
Sound Co. Ltd.

CIRCLE 30 ON FREE INFORMATION CARD

VIDEO MODULATOR

continued from page 35

resistor sets the white level on the TV screen, that is, the intensity of the light portions of the screen. When the sync input and the video input are both high, the modulation input is connected to ground through a 47K resistor, which according to Fig. 10 will cause a 480- μ V signal to be sent to the TV. If the sync input goes low (sync signal is present), an equivalent resistance to ground of 8.25K is formed (10K in parallel with 47K). This will produce an output of approximately 1390 μ V. Likewise, when the video input goes low and the sync input is high, a 920- μ V output is produced. With the waveforms in Fig. 11 applied to the sync and video inputs, two dark horizontal bars will be produced on the TV screen. Changing the values of the resistors will vary the relative brightness of the light to dark areas on the TV receiver.

The Videocube can also be used on a home microcomputer, such as the Signetics 2650-based system (Radio-Electronics, April 1977). Using the circuit in Fig. 12 to interface with the "video output" of the system, a standard TV receiver can be used as a monitor. Resistors R1 and R2 can be adjusted for the best contrast and brightness. R-E

9 Great New TAB Books for Electronicians!

- **The Complete Handbook of Slow-Scan TV**—The complete manual on setting up and operating a slow-scan TV amateur station—all the theory, all the practice, all the procedures, all the equipment, all the home-brew gear. 304 p., incl. 16 p. foldout. 169 il. paper \$9.95; hard \$14.95. No. 859
- **The Complete Handbook of Videocassette Recorders**—An all-inclusive, up-to-date manual that gives you ALL the facts about videocassette recorders—how they work, how to repair them, how to maintain them, how to modify them. 280 p., 160 il. paper \$5.95; hard \$9.95. No. 811
- **How To Build Metal Treasure Locators**—A practical, step-by-step guide to custom-building—and operating—your own treasure-finding metal detectors—from an economy model costing less than \$10 to an ultrasophisticated unit. All the detailed instructions—illustrations, photos, schematics, and parts lists—you need are right here in one handy manual. 140 p., 58 il. paper \$3.95; hard \$7.95. No. 909
- **Model Railroad Electronics**—A step-by-step guide to creating the ultimate in realistic model railroad systems with electronics. You learn how to build power packs, directional, speed, and command controls, speed indicators, signs and signals, computer circuits for train control... plus troubleshooting and repair. 308 p., 224 il. paper \$5.95; hard \$8.95; No. 926
- **Linear IC Applications Handbook**—A practical, data-packed manual that's chock-full of applications and design data on hundreds of linear ICs with special emphasis on those used in signal measurement and processing systems. Covers op amps, active filters, waveform generators, monolithic IC modulators and demodulators, transconductance and variable gain amplifiers, four-quadrant multipliers, timers, phase locked loops, etc. 280 p., 184 il. paper \$6.95; hard \$9.95. No. 938
- **88 Practical OP AMP Circuits You Can Build**—Amplifiers to integrators, log converters to function generators—here's a comprehensive design digest of working circuits for the 741 op amp. 140 p., 140 il. paper \$4.95; hard \$7.95; No. 912
- **Build-It Book of Digital Electronic Timepieces**—Build modern shipboard clocks, second-splitting digital IC chronometers, decorator digital clocks, a precision timer, a frequency/period meter, a tide and moon clock, a date, time & interval capability for your microcomputer, giant displays, multi-city clocks, etc.—including full-size PC board layouts. 296 p., 209 il. paper \$6.95; hard \$9.95. No. 905
- **Microphones: How They Work & How To Use Them**—Shows you how to record almost anything (at a professional level), explains how to get different sound effects and better stereo, describes mike placement, phasing, and recording data for over 60 different types of instruments and voice sounds. 224 p., 92 il. paper \$5.95; hard \$8.95; No. 875
- **Display Electronics**—Over 70 projects using arrays and displays, LEDs, infrared-emitting diodes, photodiodes, liquid crystals, phototransistors, light-activated SCRs, fiber optics, electroluminescence, etc. with detailed instructions on how to build them. 252 p., 195 il. paper \$5.95; hard \$8.95; No. 861

SEND NO MONEY! We'll invoice you on 10-DAY FREE TRIAL. Clip entire ad to order: TAB BOOKS, Dept. RE-87, Blue Ridge Summit, Pa. 17214

CIRCLE 11 ON FREE INFORMATION CARD

Pay less, get more.



Lots more. In fact, the new 8020A digital multimeter has more features and capability than any other DMM at any price.

Once again, it pays to think small. Costing only \$169,* the 8020A is big on features and value.

You get unbelievable field versatility with the 8020A, and it's sized to slip easily into your pocket or service kit. Compact, with big features—like 0.25% dc accuracy and 26 ranges. Conductance ranges for measuring leakage to 10,000 M Ω , or transistor beta. Ten megohm input resistance, ac and dc. Battery powered, with a large liquid crystal display.

For reliability, we've shrunk the number of total parts to only 47, including the world's first custom LSI CMOS multimeter chip.

On-the-job reliability you can't be without. A full-year guarantee. Worldwide parts and service. And more, including the traditional Fluke quality you depend on.

Call (800) 426-0361, toll free. Give us your chargecard number and we'll put an 8020A in your hand immediately. (Or a ten-pack of 8020As for only \$1521*.) Call now for the location of the closest Fluke office or distributor.

*U.S. price only.

Fluke 8020A DMM for Field Service: \$169.

1807-7006



CIRCLE 65 ON FREE INFORMATION CARD

hobby corner

Homebrew breadboard that's inexpensive, easy to build and versatile. The basic design can be easily modified.

EARL R. SAVAGE, K4SDS.

EXPERIMENTERS AND HAMS ARE FAMOUS for their well-stocked junk boxes. When they build something, many if not most or all of the parts come out of those junk boxes. If a part is not quite right, *maybe* it will be OK so use it anyway.

Well, I got tired of soldering in and then unsoldering one part after another until a circuit would finally work. As transistors, IC's and all kinds of miniature parts came along, the task became worse and worse. What I needed was an easy and non-destructive way to wire and unwire circuits.

I looked longingly at those fancy breadboarding outfits but the old wallet would not stand the strain of the ones that would do what I wanted. I settled for a few of the breadboard strips. Things worked well but every time I built the simplest circuit, my bench was covered with power supplies, switches, indicators and all kinds of things that added up to a mess.

No more! I finally stuffed everything into one box. The result was the home-

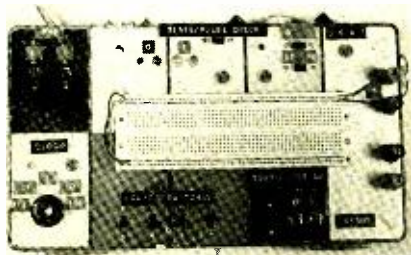


FIG. 1—HOMEBREW BREADBOARD contains facilities for developing and testing all types of solid-state circuits.

brew breadboard shown in Fig. 1. It will do what the commercial units do—a great deal more than most—and is much less expensive. Even if you have no junk box and buy everything at regular prices, the cost is under \$65. Between my junk box and bargain sales, my cost was considerably below that.

This homebrew breadboard is used for all types of solid-state circuits: TTL, DTL, RTL, MOS, CMOS, *et cetera*, digital and linear IC's as well as discrete transistors. It contains the following circuits.

1. logic switches (4)
2. state checkers (4 visual, 1 audible)
3. pulse/state checker
4. pulse generator (clock)
5. pulser switch (bounceless)
6. power supply for internal circuits
7. power supply for external circuits

You may want to put more or less into your homebrew breadboard. It is easily tailored to suit your special needs.

About the circuit

The breadboard contains two power supplies (See Fig. 2). Both are regulated and have thermal and over-current shutdown. Each has an LED pilot light. One is a light-duty 5-volt supply for the internal circuits. It is not affected by any errors or bad components in your experimental circuit.

The second power supply produces 5

volts at 1 amp and is fully regulated and protected. This comes out at two of the binding posts on the top panel for use in the experimental circuits. I chose this output because most of my work is with TTL and CMOS. Other supply voltages can be brought to the panel via the two uncommitted binding posts or directly to the distribution strips.

If you usually work with other voltages, the second power supply can easily be changed to the value you need. Alternately, it can be made variable or a third supply can be built in (there is plenty of space).

Pulse checker

Figure 3 shows a very special type of state checker. When switch S2 is in the STATE position, the LED glows in the presence of LO or HI just like the four state checkers previously described, except that switch S1 changes it from a "glow on a logic HI" to a "glow on a logic LO" checker.

When S2 is in the PULSE position, the LED *continues* to glow once the presence of LO or HI (depending on the setting of S1) has been detected. Thus,

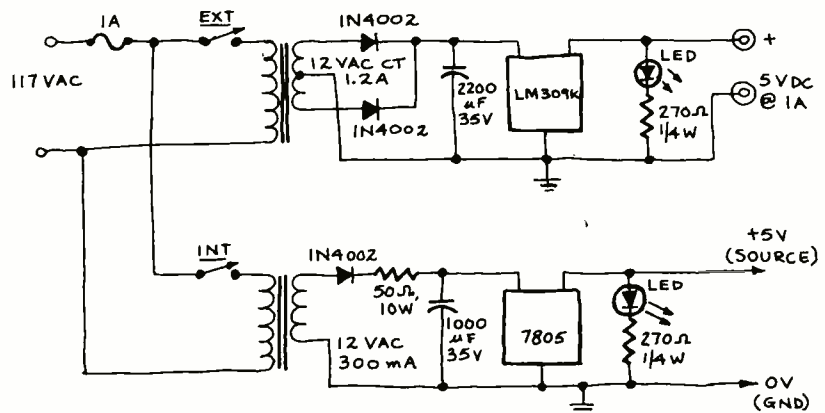


FIG. 2—HEAVY-DUTY POWER SUPPLY provides 1 amp to the circuit under development. Second supply powers internal circuits within the breadboard.

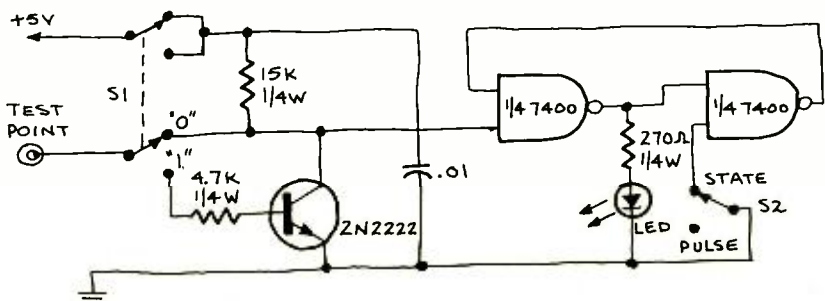


FIG. 3—PULSE CHECKER indicates presence of a low- or high-pulse as it occurs or it can "lock" on in the presence of a short duration pulse.

pulses too short and fast to be seen or heard with the other checkers will lock the LED on so you know that the pulse was there!

This circuit uses two gates—one-half of a 7400 quad 2-input NAND gate IC. The other half of the IC (two gates) is used in the pulser-switch circuit.

State checkers

The state checkers (See Fig. 4) are simple LED indicators. They are used to indicate whether a given part of a circuit is in a logic HI (1) or LO (0) state. Two LED's are wired to be turned on by logic LO and are shown in Fig. 4-a. The other two LED's are wired to be turned on by a logic HI and are shown in Fig. 4-b. For convenience of use, the four LED's are different colors.

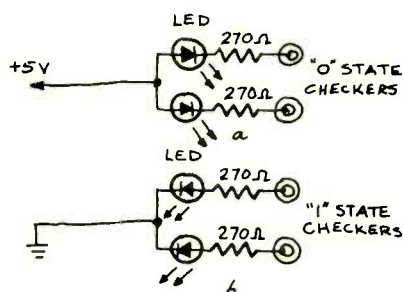


FIG. 4—VISUAL STATE INDICATORS are used 12345 to denote logic levels. The low-state indicators are shown in a, and the high-state indicators are shown in b.

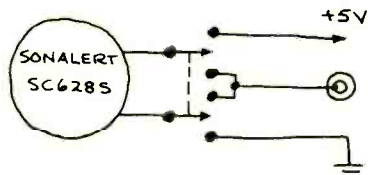


FIG. 5—AUDIBLE STATE CHECKER uses a high-frequency transducer to indicate logic levels.

Audible state checker

A Mallory *Sonalert* is used as an audible state checker (See Fig. 5). At times it is convenient to be able to know without looking at an LED whether a pin is HI or LO. The *Sonalert* does this very nicely by emitting a sound in the presence of a HI or LO depending upon the setting of the switch. (The prototype does not have this switch. Both *Sonalert* connections are brought directly to the front panel.)

A less expensive audible state checker can be made with a small speaker driven by a 555 timer connected as a multivibrator. I just happened to have the *Sonalert* in my junk box.

Logic switches

The four logic switches are nothing more than SPDT switches wired to bring a HI or LO to the front panel. They are very handy for circuits requiring frequently changed levels on one or more inputs.

To be continued.

Don't let size and price get in the way of digital.



The new 8020A, at only \$169* packs a lot of capability for a small, lightweight (13-oz.) digital multimeter.

Carry it in your pocket, or your parts caddy. Anywhere. But it's in your hand that you'll appreciate the 8020A's performance, reliability and ease of operation.

And the 8020A is as simple to repair as it is to operate. Fix it yourself if you like, with all 47 parts available at Fluke service centers worldwide. But for the first year, don't worry—our solid guarantee covers it.

The 8020A's usefulness is extensive—use it with our 80K-40 high voltage

probe, for example—a good match. With accuracy of $\pm 1\%$ at 25 kV, it's just right for precise CRT measurements.

And for a limited time, buy both the 8020A and the 80K-40 for only \$199,* and save \$15 off the price of individual units.

Clip the special coupon below and rush to your local Fluke office or distributor. Call (800) 426-0361, toll free. We'll tell you the closest office. Or, give us your chargecard number and we'll ship both today!

*Price and offer good in U.S. only.



SAVE \$15

off the list prices of the 80K-40 probe and the 8020A DMM by presenting this coupon to your local Fluke office or distributor.

Price and offer good in U.S. only; coupon expires October 31, 1977.

1807-7009

FLUKE[®]

CIRCLE 66 ON FREE INFORMATION CARD

VALUE & PERFORMANCE

EICO's 30 Years Experience
Assures More Electronics Value
For Your Money!

TEST INSTRUMENTS



NEW!

EICO 388 COLOR BAR GENERATOR

Pocket-size, battery operated with LED Indicator. MOS LSI IC provides 9 digitally controlled, stable patterns. Crystal controlled chroma and timing oscillators. Simply connects to TV's VHF antenna terminals.

Wired \$89.95

EICO 390 FUNCTION/SWEEP GENERATOR

Outstanding features include: Sine, Square, Triangle Waveforms; 2 Hz to 200 KHz frequency range; Linear and Log Sweep; Calibrated attenuator, VCO for External Frequency Control; BNC Front Panel Output.

Wired \$169.95

CB ACCESSORIES



NEW!

EICO 700 CB FREQUENCY COUNTER

Compact in-line mobile frequency counter for the serious CB'er/Hobbyist. Operates automatically on transmit. 10 Hz to 30 MHz. **\$99.95**

EICO LR-3 "LONG RANGER" INLINE PREAMP

Bring in those distant/weak signals. Boosts receiver sensitivity up to 20 db. Automatic transmit/receive switching. **\$29.95**

EICO CM-2 "CHANNEL MONITOR" AUTO-SWITCH

Automatically silences car radio when CB call is received/transmitted. **\$29.95**

EICOCRAFT® IC KITS

EC-5000 SCA ADAPTOR KIT ONLY \$12.95




Convert your FM radio or receiver to pick up the official FCC-licensed background music service (SCA). IC decoder/adaptor permits hearing uninterrupted, commercial-free music broadcast by many FM stations (For personal, non-commercial use only).

IC PROJECT KITS NOW AVAILABLE

EC-5100 ESP Tester \$10.95
EC-5200 "Decision Maker" \$9.95
EC-5400 Stereo Power Amplifier \$10.95
EC-5500 Stereo Pre-Amp \$9.95
EC-5600 Electronic Lock \$11.95
EC-5700 Universal Power Amp \$8.95

HOBBY/AUTOMOTIVE

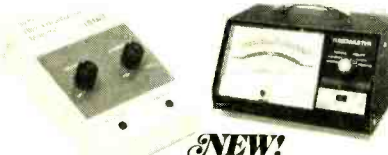

NEW!

BW-300 ALPHA BRAINWAVE MONITOR

Lowest cost, battery operated, professional Biofeedback System. IC Circuit design features an active filter and 5-microvolt sensitivity. Complete with stethoscopic earphone, electrode headband and instructions.


Kit \$34.95 Wired \$59.95

885 "TUNEMASTER" ENGINE ANALYZER

Automatic all-in-one test bench for all 6 or 12 volt ignitions—conventional or transistorized. Giant 6" meter with 6 color coded scales. Complete with tune-up and trouble-shooting manual.

Wired \$59.95

BURGLAR/FIRE ALARMS



SS-500 BURGLAR/FIRE ALARM SYSTEM

Professional Security System designed for easy do-it-yourself installation. Features EICO FC-100 Control Center with AC/DC automatic transfer to battery operation. Complete system includes Installation Handbook. Add additional sensors, bells, to suit your own needs. **\$159.95**

SD-75 BATTERY OPERATED FIRE/SMOKE ALARM

Ionization-type detector gives earliest possible fire warning. Mounts directly to ceiling with 2 screws. "Beeps" when battery needs replacement. U.L. listed. **\$39.95**

FREE EICO CATALOG

The more you know about electronics, the more you'll appreciate EICO. Every EICO product is designed to provide you with the most pleasure and quality performance for your money. The fact that more than 3 million EICO products are in use attests to their quality and performance.

"BUILD-IT-YOURSELF" and save up to 50% with our famous electronic kits.

For the latest EICO Catalog and name of nearest EICO Distributor, check reader service card or send 50¢ for fast first class mail service.

EICO-283 MaHa Street, Brooklyn, N.Y. 11207

Leadership in creative electronics since 1945.



ANTI-COLLISION SYSTEMS

continued from page 53

Originally, the large temperature range of the CMOS RCA COSMAC 1802 microprocessor made it a likely candidate. Additional memory, however, can become quite expensive. And because the architecture is non-traditional, it required a ground-up system design.

The very fast 6502 microprocessor has many advantages and only one disadvantage—temperature operating range. This can be solved by placing the entire electronics compartment in a large, thermostatically-controlled "oven." The oven keeps the ambient temperature from falling below 3°C.

OSI (Ohio Scientific Instrument, 11679 Hayden Street, Hiram, OH 44234) offers a rather complete family of microcomputer products with remarkable capabilities at a really low price. Even if you don't plan on using a microprocessor in your collision-avoidance system, I strongly recommend the OSI 440 Video Board as an excellent way of presenting a very flexible, readable display. The 440 is available for \$29 unpopulated, plus \$4 for shipping and handling. A complete kit, OSI model 445, is available for \$99, plus \$4 for shipping and handling.

System outputs

A passive system can offer a plethora of warnings. These are left to the ingenuity of the designer. Just remember, the time a warning is needed most is the time when attention can least be afforded to it.

Active systems can take over braking, steering, acceleration and more. But the driver proceeds at his own risk. A capacitor shorting out can send a child through a windshield. Double fail-safe and safeguard any system you allow to actively participate in your driving. There hasn't been a system yet intelligent enough to pass a driver's license exam.

One active output you can pursue is the air bag. Many agencies cite the air bag as a positive force in saving lives and reducing injuries. Some foreign cars now offer the air bag. Visit a dealership and talk to the guy at the parts counter about how difficult it is to retrofit one into your vehicle. It shouldn't be too hard. And be on the lookout for a do-it-yourself kit that allows you to install an air bag on your shoulder belt.

An invitation

We have undertaken here to describe some of the elements of a realizable electronic automotive collision-avoidance system you can begin building yourself. Even the individual elements of the system can go a long way toward providing you with the information you need to improve the safety of the driving environment.

We invite your response to the information printed here. Send us your ideas, too. Home computer hobbyists are invited to come up with mathematical models of the driving situation. Then refinements to the system could be plugged in to see what improvements can be made.

Automotive collisions are one of the most costly problems facing us, both in lives and property. Anything we can do to reduce that problem is a step toward making things easier on everybody.

R-E

EQUIPMENT REPORT
continued from page 32

green gun would come up to the bottom end of the BAD sector on the meter; and the red gun just barely wiggled the needle.

The *Nu-Color model 90A* is a plug-in device that is inserted between the picture tube and socket, like a brightener. However, it is *not* a brightener, at least in the usual sense of the word. Between its plug and socket is a little box with three color-coded slide controls, one for each color.


Starting with all controls at the OFF position, I plugged the *Nu-Color* in and turned the set on. As expected, the raster was a bright blue. I adjusted the controls of the *Nu-Color* and came up with a good-looking color-bar pattern. Twiddling the grey scale and the *Nu-Color* controls gave an excellent color picture. Reds saturated normally, with the color control all the way up and all other things looked very good! This device lives up to its claims and its name; it certainly did "restore the color" to this old dog.

As Oneida is careful to explain, the *Nu-Color* is not intended as a "cure-all" for color troubles, but it will help correct problems due to unbalanced picture-tube emission. The device can be installed and adjusted in the home with very little trouble. **R-E**



Put Professional Knowledge and a
COLLEGE DEGREE
in your Electronics Career through

**HOME
STUDY**

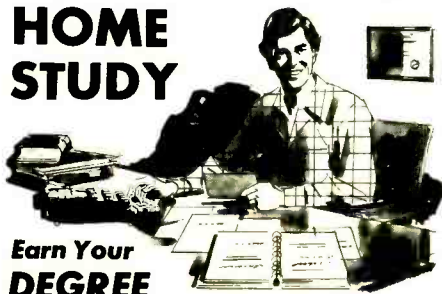

**Earn Your
DEGREE**

by correspondence, while continuing your present job. No commuting to class. Study at your own pace. Learn from complete and explicit lesson materials, with additional assistance from our home-study instructors. Advance as fast as you wish, but take all the time you need to master each topic. Profit from, and enjoy, the advantages of directed but self-paced home study.


The Grantham electronics degree program begins with basics, leads first to the A.S.E.T. degree, and then to the B.S.E.E. degree. Our *free* bulletin gives complete details of the program itself, the degrees awarded, the requirements for each degree, and how to enroll. Write for *Bulletin R-77*.

Grantham College of Engineering
2000 Stoner Avenue
P. O. Box 25992
Los Angeles, CA 90025

Worldwide Career Training thru Home Study
CIRCLE 63 ON FREE INFORMATION CARD

CASTLE

THE TUNER PIONEERS

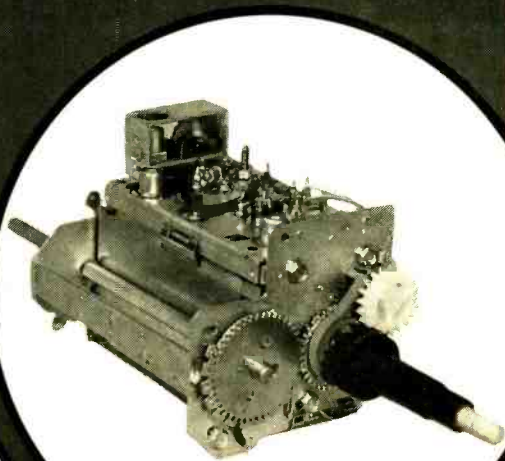

**Professional
Expertise Backed
By 25 Years Of Tuner
Service Experience . . .**

Castle has been in the business of repairing TV tuners longer than anyone. When you send your customers' defective tuners to Castle, you can be assured of receiving reliable, quality service.

Each tuner is ultrasonically cleaned. Our technicians analyze the defects, document the repair performed and return the tuner to you in a protective package. Workmanship and parts are backed by a one year limited warranty.

Consider Castle's Services

**TUNER REPAIR
\$12.95**

Any make or model. Tubes and transistors extra. Send defective tuners directly to Castle. Remove all accessories.

U/V COMBO... \$20.95

**CASTLE REPLACEMENT TUNERS
\$17.95**

In-stock replacement tuners, engineered by Castle for a wide variety of makes and models, provide original or improved performance. Purchase outright—no exchange required.

**TUNER EXCHANGE/REBUILDING
VHF \$21.95 UHF \$17.95**

When the original tuner is unfit for repair and a stock replacement is not available, the tuner can be exchanged for an exact replacement, rebuilt to original specifications, or tailored to a custom order.

All prices are f.o.b. our plant.




CASTLE TUNER SERVICE

CHICAGO, IL 60645
5744 North Western Avenue
Phone 312-728-1800

SAN JOSE, CA 95112
466 Reynolds Circle
Phone 408-289-1117

CIRCLE 61 ON FREE INFORMATION CARD

LEARN AVIATION ELECTRONICS

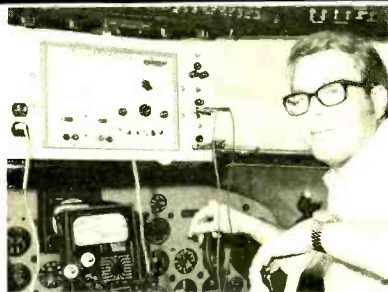

at the School
of Aeronautics,
Florida Institute
of Technology.

Prepare for a **REAL** job in just
2 years and earn a **COLLEGE
DEGREE** at the same time.

FAA publications identify that
by **1977** the **AVIATION IN-
DUSTRY** will need **230% MORE
AVIONICS TECHNICIANS.**

Half the costs of airplanes to-
day is in electronics, including
navigation systems . . . in-
struments . . . communica-
tions systems . . . and con-
trol systems.

We teach you in our labora-
tories . . . classrooms . . .
and on our aircraft the theory
of radio communications and
how to flight check and repair
all related equipment.

Our placement record of grad-
uates is **100%**. . . Make
your time and money spent
REWARDED by a job in your
field.

The **SCHOOL OF AERONAU-
TICS** operates one of the larg-
est flight training programs in
the **WORLD** and we are an
"accredited University".

Classes starting **September**
. . . **January** . . . **June.**

To learn more about our avia-
tion electronic programs,
check the reader service card
or write direct to:

**The School of Aeronautics,
Florida Institute of Tech-
nology, P.O. Drawer 1839,
Melbourne, Florida 32901
Att: Director of Admissions**

CIRCLE 8 ON FREE INFORMATION CARD

new products

More information on new products is available from the manufacturers of items identified by a Free Information number. Free Information Card follows page 88.

ROBYN 40-CHANNEL CB PACKAGE, model 007-140P, is a 40-channel CB package that includes a CB transceiver with plug-in microphone, trunk/roof mount antenna, weatherproof PA speaker and all necessary hardware and cables.



The Robyn 007-140 transceiver has comput-
er-designed phase-locked loop circuitry for top
performance with full power—4 watts output and
100% modulation (FCC's maximum allowable).
The 007-140 also features a two-way intercom,
squench control, power and volume switch, a
new CB/PA/ANL/INTERCOM selector, illumina-
ted dual function S/RF meter and channel
selector and a wood grain front panel. Suggested
list price: \$179.95, without antenna
and PA speaker: \$159.95.—**Robyn International,
Inc.**, Northland Dr., P.O. Box 478, Rockford, MI
49341

CIRCLE 80 ON FREE INFORMATION CARD

WIRE TOOL, model 104CG, combining stripper,
cutter and crimper, has been introduced by the
manufacturer for the electronics technician.



This wire tool features include a serrated-jaw
plier nose, stripper and crimper gauged to wire
sizes from No. 22 to No. 10, hardened pivot joint
bushing for light-pressure precision use, a six-
size bolt cutter, and specially formulated
cushion grip handles.—**Xcelite**, Apex, NC
27502

CIRCLE 81 ON FREE INFORMATION CARD

32-RANGE HAND-HELD DMM, model 175, has a
basic sensitivity of 100 μ V, both in the DC and
wide bandwidth AC-measuring functions. With 5
ranges of DC voltage measurement and 100%
overrange capability per range, the 175 smooth-
ly measures from 100V to 1000V in either polar-
ity, displaying both the plus and minus sign. The
DC function is protected to ± 1000 V on any
range (including 100 mV) and even during
switching. Basic instrument accuracy is 0.1%
(\pm the always-present least-significant-digit un-
certainty).

The unit measures resistance from 100
milliohms to 20 megohms in 6 ranges with a
basic accuracy of better than 0.1% on all but the
highest range and 0.2% on that. The AC range
of the instrument is the same as DC, again
providing a 100 mV sensitivity. A full frequency
response is provided from 30 Hz up to 50 kHz on
all voltage ranges, with mid-frequency accuracy
better than 0.5%.



The model 175 is protected electronically on
all voltage ranges from interfering signals up to
1000V peak (just as in DC), and on the resis-
tance ranges will withstand voltages of up to
250 VDC or RMS AC. All protection circuits
allow continuous over-voltages as specified not
only without damaging the instrument, but
without also affecting the calibration. Powered
internally by a rechargeable NiCad battery
module, it will work for up to 6 hours without
requiring a recharge. The 0.433-inch LED
display provides bright, easily readable informa-
tion under most normally expected types of
external light conditions. This unit includes a
low-battery-voltage indicator which gives ap-
proximately 10 minutes of warning before the
battery level goes down to the point where the
reading may not be reliable. Priced at \$189.—
Data Precision Corp., Audubon Rd., Wakefield,
MA 01880

CIRCLE 82 ON FREE INFORMATION CARD

40-CHANNEL REMOTE CB TRANSCEIVER, model 10 (2710) is an advanced phase-locked-
loop system that transmits and receives on all 40
channels. It employs automatic noise-limiting
circuitry to help eliminate both atmospheric and
man-made noise. As in the model 9, the model
10 has also been designed for separation of
transceiver and MSR (Microphone, Speaker and
Radio) control unit.

All 2710 controls are located on the MSR

control unit for hand-held operation of microphone, speaker and radio. There are a 40-channel selector switch plus lighted channel readout; push-to-talk button; volume and



squelch controls. The 2710 MSR control unit is linked by coiled cord to an under-dash connector. From there an optional cable (model 1179) runs to the transceiver which may be located beneath the seat, in the trunk or any other protected area. Suggested retail at \$199.95.—**Hy-Gain Electronics Corp.**, 8601 Northeast Highway 6, Lincoln, NE 68505

CIRCLE 83 ON FREE INFORMATION CARD

AEROSOL PULSATING DEVICE—the *Vibra-Jet*, when connected to an aerosol cleaner or degreaser, will provide the mechanical force necessary to dislodge hard-to-remove contaminants with its pulsating action. This action will also remove dirt from horizontal surfaces, increase solvent penetration of surface pores and remove contaminants not normally removed by the cleaning products themselves. *Vibra-Jet* comes complete with a 26-inch flexible polyurethane hose and 12-inch probe for reaching inaccessible areas. The *Vibra-Jet* probe reaches easily into very tight places and sprays effi-



ciently in any position. Designed to work with all the manufacturer's products, this device is intended primarily for use with electronic cleaners and degreasers that leave no residue. It is especially useful in enhancing the cleaning action of the manufacturer's *Tun-O-Wash*. To introduce the *Vibra-Jet*, the manufacturer is offering this device to electronic technicians with the purchase of two cans of *Tun-O-Wash*.—**Chemtronics, Inc.**, 45 Hoffman Ave. Hauppauge, NY 11787

CIRCLE 84 ON FREE INFORMATION CARD

continued on page 76

RECYCLE YOUR DUDS

9 OUT OF 10 TV SHOPS HAVE THEM!

DOES YOURS?


TV modules are doing little more than collecting dust in service shops all over the country. Check your shop! Whether you have one or 101, they are worth good money. PTS wants to buy or trade your TV modules for instant cash or credit!

CREDIT: With each tuner you send to any PTS Servicenter for repair, include the TV module and get a \$4 credit toward your repair charges.

CASH: If you have a quantity of TV modules, send us a list of brand and model numbers and we'll advise you of the value... for instant cash!

Acceptable brands are Admiral, GE, Magnavox, Montgomery Ward, Philco, Quasar, RCA, Sears/Warwick, Sylvania and Zenith. Do not include ceramic encapsulated, broken or cannibalized modules. PTS reserves the right to reject any or all modules.

For your convenience, PTS has more than 44 company-owned servicenters.


PTS ELECTRONICS, INC.
PRECISION TUNER SERVICE
P.O. BOX 272 • BLOOMINGTON, IN 47401 • 812-824-4431

CIRCLE 62 ON FREE INFORMATION CARD

Revolutionary Concept in Soldering

SINGLE-HANDED SOLDERING-PISTOL

KAGER-KL 3000

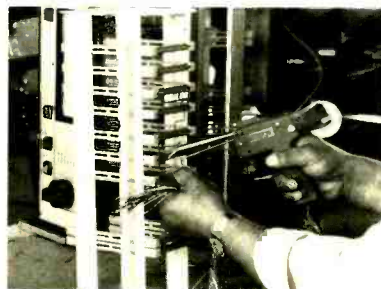

- Automatic solder feed mechanism that provides pre-set quantity of solder. Only one hand is needed, leaving other hand completely free.
- Single-hand tool for all industries. Can be used for practically any kind of soldering work.
- Light weight, less than 1 lb., compact—comfortable to hold—reliable

U.S. patents granted. Now available for the first time in the U.S.A.

Made in West Germany and already sold extensively in Europe by the KAGER-Group of companies.

For Further details write:


KAGER
International

Suite 710
1180 So. Beverly Drive
Los Angeles, CA 90035
Telephone: (213) 879-1575
TWX: 910-490-2121

CIRCLE 31 ON FREE INFORMATION CARD

If you want a microcomputer with all of these standard features...

- 8080 MPU (The one with growing software support)
- 1024 Byte ROM (With maximum capacity of 4K Bytes)
- 1024 Byte RAM (With maximum capacity of 2K Bytes)
- TTY Serial I/O
- EIA Serial I/O
- 3 parallel I/O's
- ASCII/Baudot terminal compatibility with TTY machines or video units
- Monitor having load, dump, display, insert and go functions

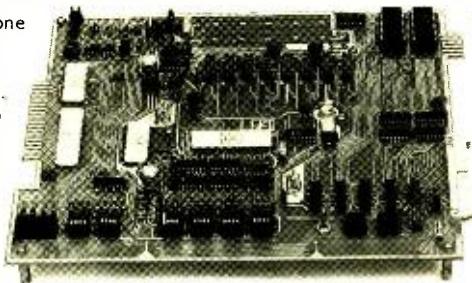

- Complete with card connectors
- Comprehensive User's Manual, plus Intel 8080 User's Manual
- Completely factory assembled and tested—not a kit
- Optional accessories: Keyboard/video display, audio cassette modem interface, power supply, ROM programmer and attractive cabinetry... plus more options to follow. **The HAL MCEM-8080. \$375**

...then let us send you our card.

HAL Communications Corp. has been a leader in digital communications for over half a decade. The MCEM-8080 microcomputer shows just how far this leadership has taken us... and how far it can take you in your applications. That's why we'd like to send you our card—one PC board that we feel is the best-valued, most complete



microcomputer you can buy. For details on the MCEM-8080, write today. We'll also include comprehensive information on the HAL DS-3000 KSR microprocessor-based terminal, the terminal that gives you multi-code compatibility, flexibility for future changes, editing, and a convenient, large video display format.

HAL Communications Corp.
Box 365, 807 E. Green Street, Urbana, Illinois 61801
Telephone (217) 367-7373

THE PAIA 8700 COMPUTER/CONTROLLER

An exceptional price on an applications oriented 6503 based micro-processor system



\$149.95

THE IDEAL, LOW COST SOLUTION TO IMPLEMENTING THOSE WILD COMPUTER BASED CONTROL SYSTEMS YOU'VE BEEN DREAMING OF!

PAIA software currently available or under development includes: Music synthesizer interface; Home applications package including: multi-zone fire/burglar alarm, real time clock, energy saving heat/air conditioning control, computer generated "door-bell"; Model road controller and more.....

8700 COMPUTER/CONTROLLER KIT \$149.95
 (requires 5v. @ 1.2A.; 12v. @ 150 ma.)

Shipped direct from PAIA (add \$3.00 postage)
 Also available at FULL LINE computer stores

DETAILS IN OUR FREE CATALOG

PAIA • DEPT. 8R • 1020 W. Wilshire Blvd. • Oklahoma City, OK 73116

CIRCLE 10 ON FREE INFORMATION CARD

FREE catalog

of over **2000** small tools, measuring instruments, and supplies



National Camera
 2000 West Union Ave., Dept. G4F
 Englewood, Colo., U.S.A. 80110

CIRCLE 16 ON FREE INFORMATION CARD

NEW PRODUCTS

continued from page 75

CORDLESS SOLDERING STATION No. 2000 consists of a rugged rechargeable iron with a quick-charge nickel-cadmium battery. The unit



is designed to accept two rigid interchangeable tips, and the charging holder with tip cleaning sponge completely recharges the battery in 4 hours. The unit is molded in high-impact plastic. Charging holder is rated at 120 volts AC input, 3.2 volts DC at 285 mA.—Ungar, Div. of Eldon Industries, Inc., 233 East Manville, Compton, CA 90220.

CIRCLE 85 ON FREE INFORMATION CARD

FREQUENCY COUNTER, model 1827 offers full 6-digit LED display and guaranteed operation to 30 MHz with 1-Hz resolution. Operation to 50 MHz is typical. The unit features 1-ppm resolution on a 6-digit scale with ± 0.25 -ppm stability. The input circuitry is sensitive enough to display a 100-mV sinewave signal, but is protected against an input signal of up to 200 volts (peak AC & DC). A broad range of optional accessories gives the unit unequaled versatility. An optional signal tap allows the 1827 to continually monitor the output frequency of a 23- or 40-channel CB transceiver without affecting normal set operation. Signal tap is rated at 100 watts.



The model 1827 is also fully compatible with the manufacturer's 40-channel CB service bench. Other optional accessories include rechargeable batteries and an AC adapter/charger, an under-shelf or under-dash mounting bracket, 27-MHz pickup antenna, general-purpose input clip-lead and vinyl carrying case. The 1827 can be powered for more than 8 hours of normal use by ordinary AA batteries or rechargeable nickel-cadmium batteries. The optional AC adapter/charger allows overnight charging of nickel-cadmium batteries, so the unit can be ready for daily field service. The unit weighs less than 1 pound and measures only 1.75 x 3.75 x 6.6 inches. Priced at \$120.00.—**B&K-PRECISION, Dynascan Corp.**, 6460 W. Cortland Ave., Chicago, IL 60635

CIRCLE 86 ON FREE INFORMATION CARD

TABLE III
RADIO-ELECTRONICS PRODUCT TEST REPORT

Manufacturer: **Hitachi**

Model: **SR-903**

OVERALL PRODUCT ANALYSIS

Retail price	\$499.95
Price category	Medium
Price/performance ratio	Excellent
Styling and appearance	Excellent
Sound quality	Very good
Mechanical performance	Excellent

Comments: In evaluating this receiver, it is easy to concentrate on the novel power amplifier circuitry to the exclusion of the other fine features. The chief virtue of the Class-G circuitry is increased efficiency, which results in a product that is both well priced (in its power and feature class) and less bulky than its competitors. The tuner section of the receiver is also well designed, as is the preamplifier control section. The extra midrange tone control is a welcome addition, as is the extremely effective auto-lock tuning method that offers all the virtues of conventional AFC without any of its measurable disadvantages.

As for the Class-G "double power supply" system, we searched carefully for any audible or measurable notch distortion (resulting from the switching action from the low-level to the high-level transistor pair) and could find none. The distortion-versus-power output curve was similar to any conventionally designed Class-B amplifier circuit; any transitional problems in switching from one power supply level to the other seem to have been successfully overcome by adding "smoothing" components which make this transition undetectable. Higher efficiency and lower heat dissipation (under actual operating conditions) are, therefore, the only consequences of the novel output circuit approach as far as actual performance is concerned.

Hitachi claims regarding the greater margin between "continuous" and "dynamic" power are justified—both in bench measurements and in listening tests. We drove this unit to considerably higher levels with musical signals than one would normally expect with a "nominally rated" 75-watt-per-channel receiver. We consider the model SR-903 to be even more of a bargain when judged on a cost/performance ratio basis.

Amplifier measurements

In view of the novel Class-G output circuit, the performance of the power amplifier section of this receiver was tested. Results listed in Table II indicate a great deal of reserve power at mid-frequencies while just making "spec" (under continuous power testing) at the frequency extremes of 20 Hz and 20 kHz. FTC preconditioning tests were particularly revealing, in that the heat generated at the one-third power point was noticeably lower than for similarly rated power amplifier sections on competitive receivers. While Table II lists THD readings at 1.0 watt and at full power output, we specifically measured distortion at intermediate levels to see if any notch distortion occurred at or near the transitional point between the "low-level" and "high-level" transistors. No such increased distortion was detected at any operating level below clipping.

Federal Trade Commission ratings notwithstanding, Hitachi stresses the fact that the Class-G arrangement offers actually greater dynamic power output capability than is possible for similarly rated (on a continuous power basis) competitive units. They maintain that under actual music listening conditions, the amplifier section is capable of delivering greater short-term power than Class-B amplifiers having the same FTC power ratings. In investigating this claim we devised an additional test. Figure 5 is a scope photo of a 1-kHz output signal whose amplitude has been increased just to the point of clipping (an output of 102 watts).

turn page

Three ways you can put test bench performance in your pocket with Hickok.

SPECIAL LIMITED TIME OFFER

Your choice **\$99.00** At participating Hickok distributors



Model 215
A fully automatic in-circuit semiconductor analyzer.
\$138

Model 239
A rock-solid MOS LSI color bar generator.
\$129

Model 350
A true auto polarity 10 megohm FET multimeter.
\$135

Now you can take the equipment you need wherever you need it with these versatile pocket performers from Hickok.

Our Model 215 Pocket semiconductor analyzer checks transistors, FETs, diodes and SCRs for conduction and gross leakage and identifies base or gate leads both in and out of circuit. And it does it all with a self-sequencing good/bad test and LED display.

Hickok-developed MOS LSI ICs give our Model 239 Pocket Color Bar Generator exceptional reliability, extremely low battery drain, rugged industrial performance and crystal stability. Simple matrix switches select any of its nine patterns, including a gated rainbow. And you can put its output on channels 2, 3 or 4.

The Model 350 Pocket FET multimeter features foolproof overload protection, true auto polarity, a polarity indicator and 10 megohm input impedance. It measures 9 dc voltage ranges, 9 ac voltage ranges, 7 hi/low resistance ranges and decibels. And it displays its findings on a long 2.4" mirrored arc.

But don't just take our word for the way these midget marvels perform. Ask your Hickok distributor for a demonstration. He may even offer a 10 day trial. Then we've got you for sure.

HICKOK


the value innovator

INSTRUMENTATION & CONTROLS DIVISION
THE HICKOK ELECTRICAL INSTRUMENT CO.
10514 Dupont Avenue • Cleveland, Ohio 44108
(216) 541-8060 • TWX: 810-421-8286

**CONFUSED BY
ELECTRONIC
IGNITION CLAIMS**



The
**PROOF is in
PERFORMANCE!**



Amazing MEGASPARK, the advanced-design Opto-Electronic Breakerless Ignition System, FITS ANY CAR! Replaces points and condenser — gives longer spark plug life. Increases performance, mileage and driving satisfaction while cutting fuel and maintenance costs dramatically. Learn the facts and don't settle for less than the best. Models from \$29.50 to \$64.50

The only unit that gives you all these features:

- LIFETIME WARRANTY
- DIFFERENTIAL AMPLIFIER CIRCUITRY
- FULL INTERNAL VOLTAGE REGULATION
- AUTOMATIC OVERCURRENT PROTECTION

Rush name and address for FREE information package including catalog and discount offer. Or call toll-free 24-hours 800-648-4711, Ext. 22.

MEGASPARK™




Ignition Systems Inc.

2547 8th Street
Berkeley, CA 94710
(415) 845-3584


CIRCLE 13 ON FREE INFORMATION CARD

R-E TESTS HITACHI SR-903
continued from page 77

Note, that the waveform is exactly four vertical divisions in height on the scope face.

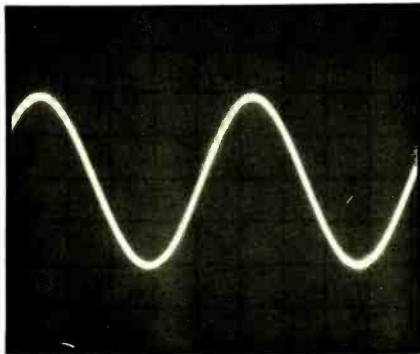

We then applied a tone-burst signal to the amplifier and increased its amplitude until the 10-kHz sinewave bursts reached the clipping level (Fig. 6). This time, the overall amplitude was five vertical divisions. Calculating the voltage level for 102 watts (8-ohm resistive loads) we determined that the RMS voltage in Fig. 5 was 28.57. Five-fourths of that voltage (the amplitude in Fig. 6) equals 35.71 volts RMS which, translated to power across an 8-ohm load, equals 159.38 watts! Hitachi claims a "dynamic power" or music power output rating of a whopping 160 watts-per-channel and, according to the above calculations, they come close enough to meeting that amazing figure.

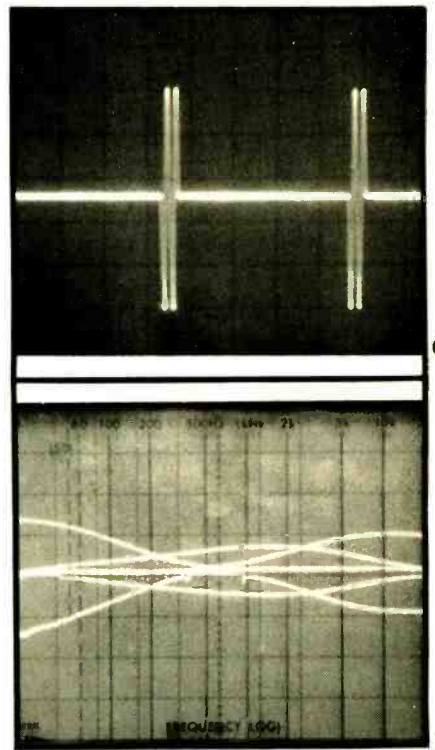

Phono preamplifier performance was quite good, with an input overload figure that should pose no problems with just about any cartridge and extremely accurate RIAA playback response. Bass, mid-range, and treble control range are shown in Fig. 7, while the *continued on page 84*



**GO
DIGITAL,
GO DANAMETER®**

(The New VOM For Today's Needs.)

- 0.25% Accuracy
- Full Overload Protection
- Really Drop-Proof
- Full One Year Battery Life

DANA®

Dana Laboratories, Inc.

2401 Campus Dr, Irvine, Ca 92715, (714) 833-1234
CIRCLE 39 ON FREE INFORMATION CARD

**"ORDINARY
COLOR BAR PATTERN
GENERATORS ARE OBSOLETE."**

That is the opinion being expressed by users of ATC-10 General Television Servicer - and with good reason!

Take a minute and see why American Technology's ATC-10 is having such excellent reviews and is gaining lots of happy owners. The ATC-10 provides most of the combined features of a conventional color bar pattern generator, an Analyst and a substitute tuner. You get time saving bonus features too, like the RF/IF attenuator capable of reducing the signal to snow for receiver sensitivity, **GRAY QUAD** pattern for simplified gray scale tracking checks/adjustments, **COLOR BARS** pattern with 6th bar marked to make your job easier, **3.58 MONITOR** pattern for oscillator frequency checks with no need to short the AFPC test point, **RED RASTER** pattern for checking and adjusting purity at the flip of a switch, **HATCHDOTS** - versatile composite pattern for dynamic & static convergence plus other checks. And high level 75 ohm VIDEO output.



Write for more information on the ATC-10 General Television Servicer, or try it at our risk. **-30 DAY SHOP TRIAL-** (If not 100% satisfied in every way, return for instant refund in full.)

ONLY \$299.95!

American Technology Corporation

225 Main Street, Dept. 8C, Canon City, CO 81212

For your convenience, we accept
Master Charge, Visa and COD phone orders.
SAME DAY SHIPMENT!

(303) 275-8991

CIRCLE 24 ON FREE INFORMATION CARD

LOOKING AHEAD

continued from page 4

for random-access tuning of up to seven channels, plus almost every function you'd normally find on the front of the set.

Pianocorder: The player piano is back, but now it uses digital electronics. Early next year, Superscope will market Pianocorder, which uses audio cassettes to do exactly what the old piano roll used to do, but better. Installed in a piano, it can bring concert and jazz pianists into the home in actual live performance, since it activates the piano's mechanism rather than using electronic reproduction. And it does one thing a player piano never could do—it can record an actual performance on the piano, and thus could be a boon for serious music students and performers.

Developing the Pianocorder was a labor of love for Superscope Chairman Joseph Tushinsky, who owns what is probably the world's largest and greatest collection of player pianos and piano rolls. Superscope will record some of the world's greatest piano-roll performances onto digital cassettes for the Pianocorder, and also will make available newly recorded works played by contemporary artists. The pianocorder will cost about \$1,200 and must be professionally installed. The customer supplies the piano.

DAVID LACHENBRUCH
CONTRIBUTING EDITOR

burglar-fire alarm catalog

FREE!



MORE THAN 900 PRODUCTS

detectors, controls, sounders, locks, tools

EVERYTHING NEEDED TO PROTECT HOME, BUSINESS, INSTITUTION

Huge selection of high quality professional alarm products. 64 fact-filled pages with detailed specs, diagrams, technical notes. Products range from basic switches, controls, bells, sirens to most sophisticated detectors — radar, modulated or passive infrared, microwave, ultrasonics, ion, data links using pulse code multiplex, FSK radio, automatic phone dialers, leased line connections and display panels. Full selection of tools, relays, wire, foil, terminals, books.

WRITE FOR FREE CATALOG TODAY!

(Outside U.S., send \$1.00.)



mountain west alarm
box 10780 • phoenix, az 85064
(602) 263-8831

CIRCLE 18 ON FREE INFORMATION CARD

For faster service

USE ZIP CODE

on all mail



UNIVERSAL TEST RIG

DOES IT ALL



\$229.95

PJS-298


C.R.T. Included

- 33KV Leaded Glass CRT
- 40KV Meter
- Build-In Speaker
- Obsolete Proof

The PJS-298 Universal Test Rig for tube and Solid State TVs designed for servicing high voltage chassis. Built-in speaker for convenient audio checking, 40KV-50Ua sensitivity meter constant monitoring of the anode voltage. Up-dating is accomplished by means of plug-in modules. (Extension cables included).

FOR FAST TROUBLE SHOOTING . . .

"FERRET" TV MINI-ANALYZER

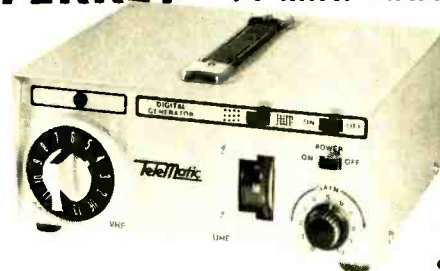

\$99.95

SG-785

- VHF/UHF Subber
- I.F. - Video Trouble Shooter
- Convergence Generator
- Dots and Cross-Hatch Patterns

The "FERRET" is a multi-functional instrument for fast, efficient trouble-shooting and adjustment of all Color and B&W tvs. It is ideal for both shop and field work. (Cables included.)

Telematic

108-02 Otis Ave., Corona, N.Y. 11363

CIRCLE 43 ON FREE INFORMATION CARD

AUGUST 1977



endeco soldering & desoldering equipment

SOLDERING IRONS



Pencil style. Safety light. Two heats — 20w and 40w. 6 tips. Unbreakable handle. 2 and 3 wire neoprene cords.

DESOLDERING IRONS



Pencil style. Safety light. Some operate at 40w, idle at 20w. 8 tip sizes. 2 and 3 wire neoprene cords.



SOLDERING & DESOLDERING KITS

Everything needed to solder or desolder or both. All in a handy lifetime metal box with hasp.

See your distributor or write...

Enterprise Development Corp.

5127 E. 65th St. • Indianapolis IN 46220
PHONE (317) 251-1231

CIRCLE 12 ON FREE INFORMATION CARD

RF SIGNAL GENERATORS

continued from page 51

When UHF signal generation is required, the L-C oscillator becomes hard to use. Stray inductance and capacitance must be reduced to an absolute

minimum to reach the highest frequencies. An alternative to the L-C oscillator for these applications is either the cavity or shortened transmission line. In either type, the fundamental signal is no longer developed by independent inductance and capacitance, but uses the

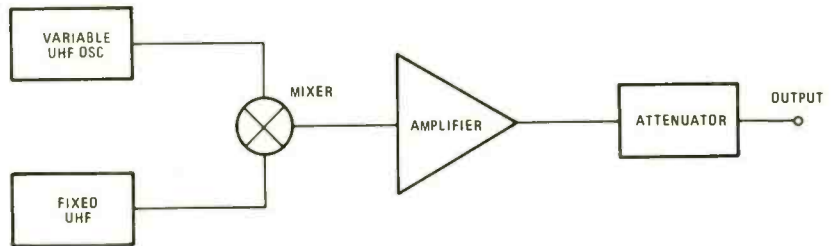


FIG. 6—UHF OSCILLATORS usually consist of a fixed cavity-type oscillator and a variable oscillator.

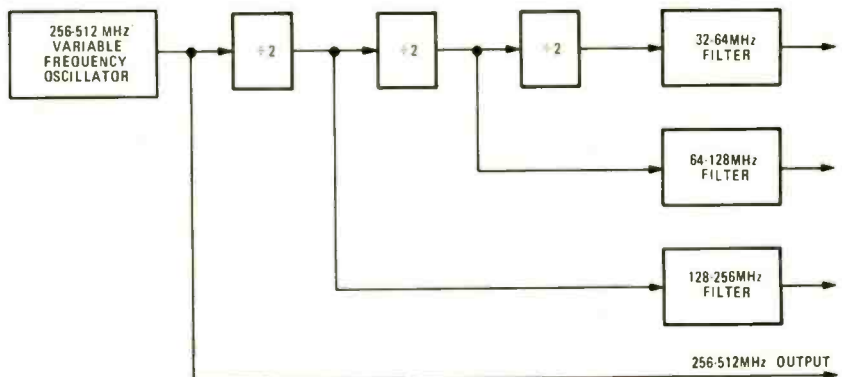


FIG. 7—ANOTHER UHF TECHNIQUE uses a tunable cavity oscillator and fixed dividers.



- High intensity, high reliability 3½ digit LED display for maximum readability
- Selectable HI/LO ohms function allows in-circuit resistance measurement on any range without forward biasing semiconductor junctions
- Universal AC power supply
- Easily installed optional battery pack
- Large, bright 7-segment digits
- DC accuracy, 0.5%
- Automatic polarity
- Full overload protection
- 100% overrange
- 1mV resolution

—NEW— 3½ DIGIT MULTI- METER

MODEL 283

BK PRECISION

TO ORDER CALL COLLECT 212-687-2224

ADVANCE ELECTRONICS

54 West 45 Street, New York, N.Y. 10036 212-687-2224

THE TEST EQUIPMENT SPECIALISTS

CIRCLE 52 ON FREE INFORMATION CARD

Big Little DMM

You get bench-size accuracy and performance with our new, hand held, 3½-digit VOM. It's in a class by itself.

- Highly readable, field-effect LCD
- Semi-autoranging
- Fast, accurate response
- Small size, battery operated (ac optional)
- Low power consumption
- Built-in overload protection

See it at your VIZ distributor

**VIZ Test
Instruments Group
of VIZ Mfg. Co.**

335 E. Price St.
Phila. PA 19144



WD-751A
\$179.00

© VIZ
6721

Formerly
RCA
Instruments

CIRCLE 46 ON FREE INFORMATION CARD

lump constant characteristics of transmission lines or coaxial cavities instead.

The cavity has considerably higher Q than an L-C circuit. The disadvantage of the cavity is normally one of size. Cavity dimensions may run from one-quarter of a wavelength to a full wavelength, thus making the cavity unsuitable for operation below 300 to 400 MHz. Cavities cannot be easily band-switched, so other techniques must be used in generators that must cover a wide range of frequencies.

One technique is shown in Fig. 6. The output of the cavity and the output of a fixed oscillator are mixed to generate a lower frequency signal. Both the cavity and the fixed frequency oscillator operate at considerably higher frequencies than the desired generator output. Although only one oscillator is shown as a variable frequency cavity, both oscillators may be variable frequency cavities in certain generator designs. Modern cavity circuits are electronically tuned by an extremely high quality variable-capacitance diode. Such techniques require only simple feedback circuits to maintain frequency stability.

An alternate scheme presently used by Hewlett-Packard (see Fig. 7) is a tunable cavity oscillator with an upper limit of 512 MHz. The output of this oscillator is either used directly or applied to the input of high-speed flip-flops. The flip-flop output frequency is exactly one-half the oscillator frequency. All frequencies are covered, as the cavity oscillator has a tuning ratio of slightly more than 2:1. Although the output of a flip-flop is a squarewave, suitable filtering is inserted, on a bandswitch basis, to remove the odd harmonic components, thus producing a spectrally pure signal. As more high-speed logic becomes available, it seems reasonable this technique may become common.

Extended high-frequency operation can be obtained by using frequency doublers. They normally consist of diodes along with suitable filtering circuits to provide an output at twice the input frequency.

Two forms of additional frequency control are currently used on modern signal generator designs to get higher stability. In the first and simplest form, a variable-capacitance diode is placed in shunt with the tuning capacitor of the L-C oscillator. The electronic tuning range provided by the variable-capacitance diode is limited. Frequency comparison circuitry compares the generator frequency to an external standard frequency and supplies error correction to the electronic tuning circuits. These circuits lock the generator to the standard signal over a limited frequency range.

In the second, and more involved mode of electronic frequency control, the oscillator frequency is corrected by a variable-capacitance diode. An error signal is derived from digital circuitry that compares the measured generator frequency to the original frequency setting of the signal generator. Any difference between the frequency displayed at the front panel and the currently measured frequency generates an error signal that is fed to the variable-capacitance diode to bring the generator back on frequency. If the operator wants to change the generator frequency, the digital frequency meter is switched from this locking mode to a simple frequency measurement mode, and the measured frequency is displayed on the front panel. Although complete electronic tuning of oscillators is possible, it is not yet widely used on radio-frequency signal generators because of the difficulties that arise when attempting to provide very slight amounts of frequency modulation.

Next time we'll continue with a careful examination of modulators and attenuators.

(to be continued)

HIGH BLOOD PRESSURE. Treat it...and live.

The National High Blood Pressure Education Program,
U.S. Department of Health, Education, and Welfare.



INTERNATIONAL FM 2400CH

FREQUENCY METER for testing mobile transmitters and receivers



- Tests Predetermined Frequencies 25 to 1000 MHz
- Extended Range Covers 950 MHz Band
- Pin Diode Attenuator for Full Range Coverage as Signal Generator
- Measures FM Deviation

The **FM-2400CH** provides an accurate frequency standard for testing and adjustment of mobile transmitters and receivers at predetermined frequencies.


The FM-2400CH with its extended range covers 25 to 1000 MHz. The frequencies can be those of the radio frequency channels of operation and/or the intermediate frequencies of the receiver between 5 MHz and 40 MHz.

Frequency Stability: $\pm .0005\%$ from $+50^{\circ}$ to $+104^{\circ}\text{F}$.

Frequency stability with built-in thermometer and temperature corrected charts: $\pm .00025\%$ from $+25^{\circ}$ to $+125^{\circ}$ (.000125% special 450 MHz crystals available).

Self-contained in small portable case. Complete solid state circuitry. Rechargeable batteries.

FM-2400CH (meter only) \$595 00
RF crystals (with temperature correction) ... 24 00 ea.
RF crystals (less temperature correction) ... 18 00 ea.
IF crystals catalog price

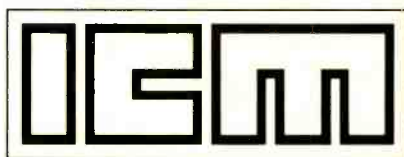

International Crystal Manufacturing Company, Inc.

10 North Lee, Oklahoma City, Oklahoma 73102

CIRCLE 47 ON FREE INFORMATION CARD

**MATHEMATICS
ELECTRONICS
ENGINEERING MATHEMATICS
ADVANCED MATHEMATICS**

These unusual courses are the result of many years of study and thought by the President of Indiana Home Study, who has personally lectured in the classroom to thousands of men, from all walks of life, on mathematics, and electrical and electronic engineering.

You will have to see the lessons to appreciate them!

NOW you can master mathematics and electronics and actually enjoy doing it!

WE ARE THIS SURE:—you order your lessons on a money-back guarantee.


In plain language, if you aren't satisfied you don't pay, and there are no strings attached.

Write today for more information and your outline of courses.

You have nothing to lose, and everything to gain!

**The INDIANA
HOME STUDY INSTITUTE**
P.O. BOX 1189
PANAMA CITY, FLA 32401

CIRCLE 17 ON FREE INFORMATION CARD



**Our whole family helped assemble
this wonderful Schober Organ...
and now we all play it!**

Talk about real family fun! We all worked together, for a few hours almost every day. Almost too soon, our Schober Organ was finished. Our keen-eyed daughter sorted resistors. Mom soldered transistor sockets, although she'd never soldered anything before. And it did our hearts good to see the care with which our son—he's only 12—installed the transistors. Me? I was the quality control inspector—they let me do the final wiring.

Our completed Schober Organ compares favorably with a "ready-made" one costing twice as much! (The five models range from \$650 to \$2850.)

Just send the coupon for the fascinating Schober color catalog (or enclose \$1 for a 12-inch LP record that lets you hear as well as see Schober quality).

The Schober Organ Corp., Dept. RE-165
43 West 61st Street, New York, N.Y. 10023

Please send me Schober Organ Catalog.
 Enclosed please find \$1.00 for 12-inch LP record of Schober Organ music.

NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____

SOUND FOR HOME MOVIES
continued from page 48

on and the SCR conducts. A higher control current will discharge C3 faster and the SCR will turn on sooner. Waveforms at various points in this circuit are shown in Fig. 3. This control current is the analog signal that has to be provided by the rest of the synchronizer.

Let's take a closer look at how the control current affects circuit operation. With no control current, the collector of Q5 will stay near V++ and the SCR will not trigger, so that the projector would not run. If we look at what happens when the AC line passes through zero volts, we find that Q4 is conducting and the base of Q5 is grounded, which means that Q5 is cut off. At this moment, C3 charges towards V++ through R10. As soon as the AC line waveform gets away from zero, Q4 will cut off. If no control current is present, Q5 will also remain cut off and C3 will remain fully charged, cutting off Q6 and ensuring that the SCR will not trigger. When control current is present, Q5 will conduct and the voltage at the collector of Q5 will drop toward ground, as shown in Fig. 3-b.

Control current from somewhere is absolutely necessary to run the circuit, and it can be as simple a thing as a resistor or pot. A simple current-control that provides rather crude control of my machine consists of a 12,000-ohm resistor and 10,000-ohm pot in series from +12 volts to the collector of Q4.

The remainder of Fig. 2 is a simple power supply. A 12-volt, 1-watt Zener diode was tacked onto the logic board (not shown) for regulation. I connected the projector's original low-voltage winding in series with a small filament transformer to obtain a reasonable supply with a very small transformer that was on hand.

Construction

The circuit shown in Fig. 2 was assembled on one PC board and mounted in the projector on an aluminum bracket. The foil pattern is shown in Fig. 4 and component layout is shown in Fig. 5. Note that the components are mounted on the foil side of the board, and that the foil pattern is shown from this side. The aluminum bracket also served as a heatsink for SCR1. The whole assembly went quite neatly into the area formerly occupied by the rheostat, as shown in Fig. 6.

The bracket also held a miniature pot that I connected to the projector's speed control knob. I wanted to retain the function of the speed control knob when the machine was running without an external control signal. (The pot is hooked up in the synchronizer circuit, not shown in this article.) Figure 7

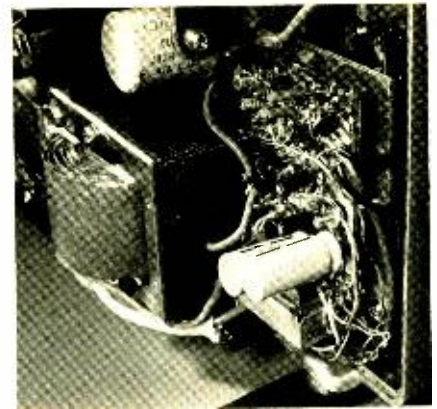


FIG. 6—PC BOARD mounted inside projector.

function of the speed control knob when the machine was running without an external control signal. (The pot is hooked up in the synchronizer circuit, not shown in this article.) Figure 7

**BETTER
THAN A
THIRD HAND!**



**PANAVISE TILTS, TURNS, AND
ROTATES TO ANY POSITION.
IT HOLDS YOUR WORK
EXACTLY WHERE YOU WANT IT.**

**PanaVise has great strength yet is gentle
enough to firmly hold delicate objects.**

Quite possibly the finest new tool you will buy this year, PanaVise is built to exacting professional standards. We guarantee it!

Illustrated is the Electronics Vise Model 396. Three other bases and a wide variety of heads are available. All interchangeable! Buy a basic unit, then add on to create your system.

Available through your dealer.
Write for a free catalog.

PANAVISE® Dept. 5E
10107 Adella Ave., South Gate, CA 90280
In Canada: 25 Toro Rd., Downsview, Ont. M3J 2A6

 A Division of Colbert Industries

CIRCLE 75 ON FREE INFORMATION CARD

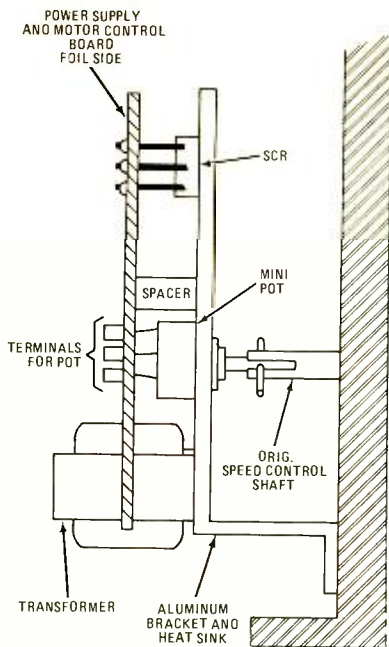


FIG. 7—MOUNTING DETAILS of the PC board.

shows a detailed side view of how the PC board was mounted.

The other thing the projector has to provide is some signal indicating when one frame has gone through. In every projector I have ever seen, the mechanism is built around a shaft that goes around once for every frame of film.


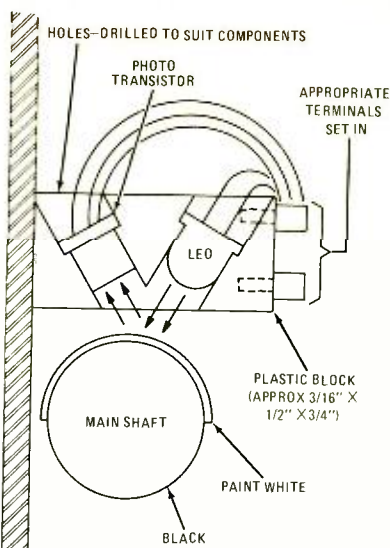


FIG. 8—COMPARISON SIGNAL is generated by an LED and photo-transistor mounted over the main shaft.

This provides a number of possibilities. The method I used is illustrated in Fig. 8. A white stripe is painted on a spot on the shaft and is illuminated by an LED. Every time the stripe goes by, the photo-transistor produces an output that is amplified and used. The photo-pickoff is mounted near the projector's inching knob. This type of pickoff needs no alterations to the projector mechanism.

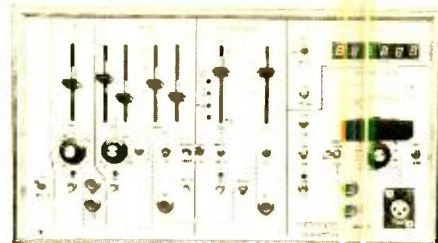

MODEL 101 AUDIO TEST SYSTEM consists of two sine/square/triangle function generators, pulse generator, frequency counter and AC voltmeter. As a system it will generate a frequency response plot on an X-Y recorder or scope.

Time base generator offers symmetrical or independent control of the positive and negative sides of the ramp providing a duty cycle of 1% to 99%. Frequency range is .002 Hz to 100k Hz. Amplitude is 16 Vpp into 500 Ohms with ± 5 VDC offset. The time base output drives the X axis of an X-Y recorder. Manual mode provided for setup.

Audio sweep generator provides manual frequency adjustment or log/linear sweep of 20 Hz to 20k Hz. Blanking mode provides zero reference line on an X-Y recorder or tone burst. Amplitude is 16 Vpp into 500 Ohms or 10 Vpp into 8 Ohms.

Pulse generator frequency range is .002 Hz to 800k Hz. Pulse width is adjusted independent of frequency from 4 seconds to 40 nanoseconds. Outputs are complementary TTL.

AC Voltmeter has full scale sensitivities from 1 mV to 250 V. Fast/slow, peak/true RMS and log/linear modes are provided. Output drives Y axis of X-Y recorder.


Frequency counter is 6 digit, line triggered, and reads either internal or external. Sensitivity is 10k M_W peak at 20k Hz. 1/1/2 sec. update. 50/60 Hz.

Dimensions: 8x14x3. Shipping weight: 9 lbs. \$650. Stock to 30 days. Warranty: 1 year, 3-year \$50.

FIDELITY SOUND

1894 Commonwealth W. #105
San Bernardino, Ca 92408
(714) 899-7621

CIRCLE 15 ON FREE INFORMATION CARD

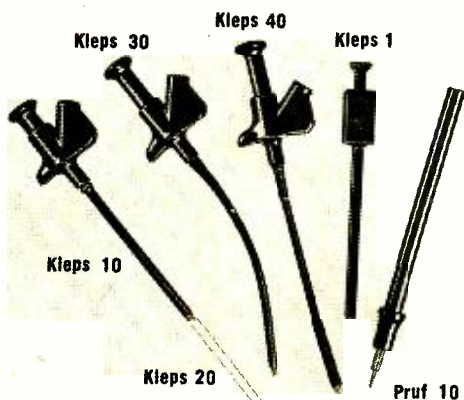

Clever Kleps

Test probes designed by your needs—Push to seize, push to release (all Kleps spring loaded).

Kleps 10. Boathook clamp grips wires, lugs, terminals. Accepts banana plug or bare wire lead. 4 3/4" long. **\$1.39**

Kleps 20. Same, but 7" long. **\$1.49**

Kleps 30. Completely flexible. Forked-tongue gripper. Accepts banana plug or bare lead. 6" long. **\$1.79**

Kleps 40. Completely flexible. 3-segment automatic collet firmly grips wire ends, PC-board terminals, connector pins. Accepts banana plug or plain wire. 6 1/4" long. **\$2.59**

Kleps 1. Economy Kleps for light line work (not lab quality). Meshing claws. 4 1/2" long. **\$.99**

Prof 10. Versatile test prod. Solder connection. Molded phenolic. Doubles as scribing tool. "Bunch" pin fits banana jack. Phone tip. 5 1/2" long. **\$.89**

All in red or black - specify. (Add 50¢ postage and handling). Write for complete catalog of - test probes, plugs, sockets, connectors, earphones, headsets, miniature components.

Available through your local distributor, or write to:



RYE INDUSTRIES INC.

125 Spencer Place, Mamaroneck, N.Y. 10543

In Canada: Rye Industries (Canada) Ltd.

CIRCLE 60 ON FREE INFORMATION CARD



Accuracy like a VTVM... Convenience like a VOM...

NEW BATTERY-OPERATED FET
SOLID-STATE VOLT-OHMMETER #116

Easy-to-build KIT

\$39.48 =116K

Factory-Wired & Tested


\$52.95 =116W

Now you can get all the benefits of a VTVM (laboratory accuracy, stability and wide range) but with its drawbacks gone: no plugging into an AC outlet, no waiting for warm-up, no bulkiness. New Field Effect Transistor (FET) design makes possible low loading, instant-on battery-operation and small size. Excellent for both bench and field work.

Compare these valuable features:

- High impedance low loading: 11 megohms input on DC, 1 megohm on AC
- 500-times more sensitive than a standard 20,000 ohms-per-volt VOM
- Wide-range versatility: 4 P-P AC voltage ranges: 0-3, 3, 33, 330, 1200V; 4 RMS AC voltage ranges: 0-1.2, 12, 120, 1200V; 4 DC voltage ranges: 0-1.2, 12, 120, 1200V; 4 Resistance ranges: 0-1K, 0-100K, 0-10 meg., 0-1000 meg.; 4DB ranges. -24 to +56DB.

Sensitive easy-to-read 4 1/2" 200 micro-amp meter. Zero center position available. Comprises FET transistor, 4 silicon transistors, 2 diodes. Meter and transistors protected against burnout. Etched panel for durability. High-impact bakelite case with handle useable as instrument stand. Kit has simplified step-by-step assembly instructions. Both kit and factory-wired versions shipped complete with batteries and test leads. 5 1/4" H x 6 3/4" W x 2 7/8" D. 3 lbs.

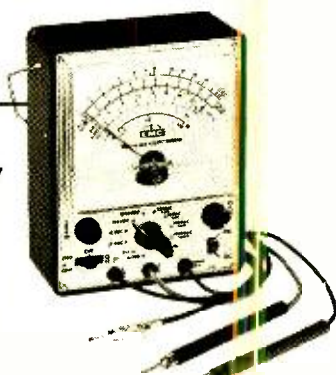

Send FREE catalog of complete EMC line and name of nearest distributor.

RE-08

Name _____

Address _____

City _____

State _____ Zip _____

EMC

ELECTRONIC MEASUREMENTS CORP.
625 Broadway, New York, N.Y. 10012

AUGUST 1977

SYSTEM 5000

The New Programmable Clock Kit from Digital Concepts. \$29.95

SYSTEM 5000 is the programmable clock kit that makes kit building a new experience. The system has been designed to meet a variety of particular requirements and tastes, and programming techniques are used to create a truly individualized timepiece. Numerous functions and features are provided for maximum flexibility and adaptability, and any of all can be used to construct many different types of time keeping and timing devices.

SYSTEM 5000 is not a simple LED time of day clock, but a full feature digital timing system. Programming is accomplished by connecting the appropriate jumpers and switches to produce the desired system configuration. Complete assembly and programming manuals are included.

SYSTEM 5000 has a fluorescent readout panel with four 0.5" numerals that brighten and dim automatically according to the ambient light. This unique digital display provides optimum readability at all times from almost any viewing angle.

SYSTEM 5000 can be built as a desk clock, alarm clock, calendar clock, or all of these in one full feature timepiece. The Duplicate Time Register can monitor elapsed time or another Time Zone such as GMT. A ten minute "10" reminder capability is included for Radio Station use. A quartz time base is available for high precision stability and uninterrupted operation of the AC line should fail.

SYSTEM 5000 can automatically control AC or DC accessories up



to 700 Watts by adding the optional relay. Plug in your radio or stereo to construct a full function clock radio that puts you to sleep with gentle music and wakes you to music, a tone, or both. The system will also control TV's, small appliances, or other accessories. SYSTEM 5000 can be used to construct timers for a variety of applications. It is ideal for automatic process timers and controllers in laboratories, workshops, and engineering facilities. SYSTEM 5000 includes all components, speaker, two time setting switches, and comprehensive instruction and programming manuals. Case & switches for programming additional functions are not included but available as options. \$29.95

FEATURES AND SPECIFICATIONS

Timekeeping Functions	Display	General
<ul style="list-style-type: none"> Time of Day Register Duplicate Time Register True 24 Hour Alarm Duplicate 24 Hour Alarm 10 Minute Snooze on Alarms True Four Year Calendar One Hour Down Counter 	<ul style="list-style-type: none"> Bright 4 Digit Fluorescent Panel Automatic Brightness Circuit 12 or 24 Hour Display Format PM and Power Failure Indication 1 Hz Activity Indicator Power-On Clear Direct Drive Eliminates all RF 	<ul style="list-style-type: none"> Forward or Reverse Time Setting Reset and Count Inhibit Controls Seconds Display Single 9 Volt Battery Backup 700 Watt Relay Optional 50 or 60 Hz, 117 Vac, 3 Watts 1.5" H x 4" W x 4" D

RELAY OPTION - \$4.00

Includes 700 watt relay and all interface components. Will control AC or DC accessories such as appliances, stereos, etc.

QUARTZ TIME BASE OPTION - \$6.95

Generates precise 60 Hz buffered output with exceptional stability, reliability, and accuracy. Direct interface to System 5000 and most other clocks. Includes Quartz Crystal, IC Dividers, trimmer, compact G-10 board, all necessary components, instructions, and installation directions.

SWITCH OPTION - \$3.75

Contains 3 black SPST pushbuttons, 2 black DPDT pushbuttons, and 2 black SPST slide switches. Programs all major features.

CASE OPTION - \$11.00

This deluxe hand finished solid walnut (3/8" cabinet forms an ideal housing for the completed system. Includes rear panel and standard blue faceplate, extra faceplates (blue or green) are \$1.00 ea. Cabinet dimensions - 5" H x 5" W x 3" D.

ORDER THIS EXCITING KIT TODAY AND PUT ELECTRONIC TIMEKEEPING TO WORK FOR YOU!



Send your check or money order today for fast delivery. Add 1% to total order to cover shipping and insurance. NJ residents must also add 5% sales tax.



digital concepts

Digital Concepts Corporation • 247 Route 46
Saddle Brook, New Jersey 07662 • (201) 846-7101

CIRCLE 64 ON FREE INFORMATION CARD

1 out of 2 who have it don't know it...

DOUGLY

21 million Americans have high blood pressure. But 50 percent of those who have it, don't know it.

When blood pressure goes higher than it should, and stays high, it sets the stage for heart attack or stroke. Most cases of high blood pressure can be controlled with drugs and other advances in treatment. That's why you should see your doctor regularly. Only he can tell if you need help.


A public service message from your heart Association



R-E TESTS HITACHI SR-903

continued from page 78

low- and high-cut filter action is shown in Fig. 8. We felt that the filter slope was too gentle, and cutoff points were set too far within the musical frequency spectrum.

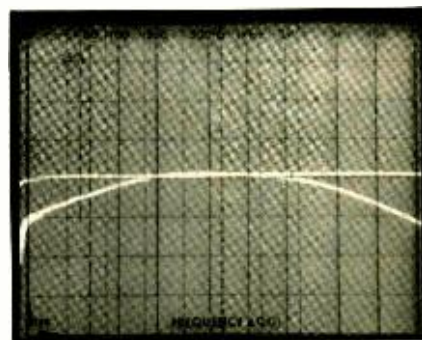

Summary

Our overall product analysis for the Hitachi model SR-903 is found in Table III, along with our summary comments. All our tests indicate that Hitachi's innovative output circuit is a significant achievement in audio design and offers clear consumer benefits. Until we see examples of proposed Class-D or "switching" amplifiers that promise even greater efficiency, the model SR-903 stands alone among high-efficiency, excellent-performing all-in-one receivers. Clearly, more than "energy conservation" is involved in this design. The reduced heat-sink requirements and the significantly lower heat dissipation of this receiver should help give years of trouble-free service and reproduce music with greater dynamic range capability than its "continuous power" rating would suggest. R-E


RCA promoting service centers through Yellow Pages campaign

A nationwide campaign to encourage all authorized RCA service centers to list their names in the Yellow Pages under the heading "RCA Authorized Servicenters" is now under way, reports Arnold T. Valencia of RCA Sales Corp. This single listing, he believes, will benefit the service centers by providing additional advertising exposure and will assist the public in finding service.

"We hope," said Mr. Valencia, "to increase the number of RCA Authorized Servicenters in the Yellow Pages from the present 1,200 to a level approaching the total 10,000 that exist in the country."

Double low-pass filters kill spurious emissions

Through the use of special networks in the transmitter/loading circuits, plus double low-pass filters in the output of both solid-state and tube RF amplifiers, Palomar Electronics has reduced harmonic content to a figure greater than 45-dB average. The filter system has been incorporated in all Palomar products made after April 15, 1977, in conformance with the FCC order related to Part 97.73 of FCC regulations.

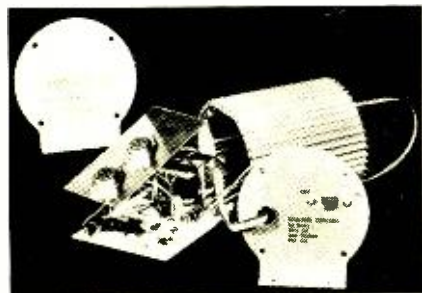

FROM KIT TO CAR IN 80 MINUTES!

Electronic ignition is "in." Update your car with the TOPS in power, efficiency and reliability — the TIGER SST capacitive discharge ignition (CD).

The TIGER delivers everything other CD's promise — and more: quicker starting, more power, more gas mileage, tune-ups eliminated, lifetime plugs and points, reduced repairs and pollution.

The TIGER can be built and installed in your car in 80 minutes. The TIGER is unique!

The TIGER comes with a switch for TIGER or standard ignition for 12V negative ground only.

Simpli-Kit \$21.95
POST PAID U.S.A.

WE ACCEPT:

Mastercharge or BankAmericard.

Send check or money order with order to:

Tri-Star Corporation

DEPT. FF, P.O. Box 1727
Grand Junction, Colorado 81501

NATIONAL ELECTRONIC

NESDA

SERVICE DEALERS ASSOCIATION, INC.

1715 EXPO LANE
INDIANAPOLIS, INDIANA 46224
PHONE: (317) 241-8160

PURPOSE

NESDA, founded in 1973, is a consolidation of the majority of the professional state and local Electronic Service Associations of the United States. The individual NESDA members are engaged in Radio-TV Sales and Service; Marine and 2-way Communications; audio-visual installation and repair; MATV — Master Antenna Systems; auto radio repair; CCTV — Closed Circuit TV, sound systems, and other types of businesses where technical electronic service is needed.

The basic purpose of NESDA is to help the service business operator improve his management skills and grow in his profession—and to help him develop his service business and strengthen his business position.

NESDA shows service dealers new ways to solve management and technical problems, how to motivate and increase the skill of their technical staffs, and how to better serve the electronic service needs of the community.

Write for member application and more money making information about the National Association.

CIRCLE 77 ON FREE INFORMATION CARD

market center

CLASSIFIED COMMERCIAL RATE (for firms or individuals offering commercial products or services) **\$1.40 per word (no charge for zip code)** . . . minimum 15 words.

NONCOMMERCIAL RATE (for individuals who want to buy or sell personal items) **85¢ per word** . . . no minimum.

ONLY FIRST WORD AND NAME set in bold caps. Additional bold face (not available as all caps) at 10¢ per word. Payment must accompany all ads except those placed by accredited advertising agencies. 5% discount for 6 issues, 10% for 12 issues within one year, if paid in advance. All copy subject to publisher's approval. Advertisements using P.O. Box address will not be accepted until advertiser supplies publisher with permanent address and phone number. Copy to be in our hands on the 26th of the third month preceding the date of the issue (i.e., August issue closes May 26). When normal closing date falls on Saturday, Sunday or a holiday, issue closes on preceding working day.

BUSINESS OPPORTUNITIES

HIGHLY PROFITABLE **ONE-MAN ELECTRONIC FACTORY**

Investment unnecessary, knowledge not required, sales handled by professionals. Ideal home business. Write today for facts! **Postcard will do. Barta-BT, Box 248, Walnut Creek, CA 94597.**

PLANS & KITS

BI-LINEAR amplifier, broadband, 60-150 watt mobile. Construction plans, \$3.00. **WILSON, Box 5516-FH, Walnut Creek, CA 94596**

BUILD YOUR OWN TV CAMERA! — Ideal for home & business —



THE ECONOMICAL ANSWER TO HOME MONITORING OF NURSERIES, ENTRANCES, DRIVEWAYS, BUSINESS and INDUSTRIAL SURVEILLANCE. TV, AMATEUR, TV PLUS HUNDREDS OF OTHER APPLICATIONS. MODEL XT-1A, SERIES D - KIT FORM \$185; ASSEMBLED \$275. SOLID-STATE WORKS ON ANY TV SET - OPTIONAL SOUND KIT \$29.95. PHONE or WRITE for catalog. Dial 402-987-3771

BOX 453-RE ATV Research DAKOTA CITY, NE 68731

FREE catalog—TV games from \$19.95. Electronic kits, semis, parts at lowest prices. **DIAMONDBACK, Box 194R, Spring Valley, IL 61362**

PRINTED circuit boards from artwork, magazine layouts. Fast service. Information send stamped envelope. **OMEGA ENTERPRISES, Box 48239, Chicago, IL 60648**



PROGRAMMABLE TV CLOCK

THE DC 12 CLOCK MODULE ADDS A DIGITAL TIME DISPLAY TO YOUR TV SCREEN. *** AS FEATURED IN JULY RADIO ELECTRONICS. PROGRAMMING OPTIONS INCLUDE: ● HORIZONTAL & VERTICAL LOCATION OF THE DISPLAY ● DISPLAY FREQUENCY (1 TO 10 MIN.) DISPLAY FORMAT (12 OR 24 HOURS) ● SECONDS DISPLAY OR SUPPRESSION ● DURATION OF DISPLAY ● AUXILIARY INPUT FOR TEMPERATURE, STOPWATCH, ETC. COMPLETE KIT WITH INSTRUCTIONS: **\$29.95** PLUS \$2.00 SHIPPING INCLUDING CIRCUIT BOARD, TRANSFORMER AND 50 COMPONENTS. FOR INFORMATION ON OTHER CLOCKS AND GAMES WRITE TO:

INTERFAB, 27963 CABOT RD. LAGUNA NIGUEL, CA. 92677

MUSIC SYNTHESIS ANALOG PROCESSING PLANS & KITS CIRCUIT THEORY PARTS AND COMPONENTS

CFR associates
POST OFFICE BOX
NEWTON MA 02459
603-552-5179

FREE!!! INFORMATION SEND A SELF
ADDRESS STAMPED ENVELOPE DON'T DELAY DO IT NOW

67 KHz SCA kits for extended FM reception. Includes drilled bakelite case, 110 volt power supply parts, wired and tested PC board. Quality products \$47.50. Fully wired \$60.00. **MUSIC ASSOCIATED, 65 Glenwood Rd., Upper Montclair, NJ 07043 (201) 744-3387**

FREE KIT Catalog

STOP! Take a minute & let us send our latest kit catalog. If you like, send us the name & address of a friend who may also be interested and we'll include to you our booklet "How to build electronic thermometer".

contains **TEST & EXPERIMENTER'S EQUIP.**

DAGE SCIENTIFIC INSTRUMENTS
BOX 1054R LIVERMORE CA 94550

TACHOMETER builders: 0-200 microammeter, 0-6000 RPM scale, 2 1/2" diameter, marine quality brass construction. \$6.00 postpaid, USA. **HOFFER, 24 Cherry Road, Framingham, MA 01701**

BUILD YOUR OWN SPEAKERS AND SAVE UP TO 50%


Send for our free fact-packed 44-page catalog manual and learn how to assemble your own multi-element stereo speakers from scratch or from kits. Our catalog includes chapters on design construction, covers, enclosures, mixtures, wooters, tweeters and horns. Write us today.

SPEAKERLAB
Dept. RE-A, 5500 35th N.E.
Seattle, Washington 98105

STEREO 50 watt RMS—power amplifier. Very simple to build—few parts required—excellent performance. Send \$5.00 check or money order for schematic. **STEREO 50, P. O. Box 8632, Anaheim, CA 92802**

NEW!

The PTX Test Board



Look at these features!!

- Solid printed circuit board.
 - Numbered tie points and colored plugs for easier connections.
 - All parts can be reused.
- Good for all breadboarding uses from simple hobby projects to microprocessor applications. Greater capacity than other similar boards. Handles 10 IC's in different sizes; (14, 16, 24, 28, and 40 pin DIL). The PTX kit includes: Board, plugs, sockets & eyelets. Only \$36.25—Order # 141

ALSO NEW!

A complete package for the Experimenter including the above PTX kit and these 3 specially selected books: Basic Digital Electronics Course, OP AMP Circuit Design and Applications, Optoelectronics Guidebook—with tested projects (Electronic dice, logic probe and much, much more) All for only \$49.95—Order # 151

Other books of interest!

Programming Microprocessors—Order #985—\$6.95
Microprocessor/Microprogram. Handbook—Order #785—\$6.95. Computer Programming Handbook—Order #752—\$6.95. Master Handbook of 1001 Practical Electronic Circuits—Order #800—\$9.95.
All items are postpaid
N.Y. City and State residents add tax.

PRINTRONIX

1361 Flatbush Ave., Bklyn, N.Y. 11210

Please send: # 141 # 151
985 # 785 # 752 # 800

Total check or money order _____

Name: _____

Address: _____

City: _____ State: _____ Zip: _____

CIRCLE 23 ON FREE INFORMATION CARD

Olson ELECTRONIC PARTS AND ACCESSORIES

\$1 Ea.
BA-341
NICKEL CADMIUM
"AA" Pen-Lite Cells
• Rechargeable

Ideal for radios, calculators, etc. 1.2 Volt.

	REG.	SALE
BSR Smoke & Gas Alarm, XM-646	19.99	
Photo Elect. Camera Shutter, XM-637	1.45	1.00
Sperry 9 Digit Readout, XM-399	95	59
12 VDC Relay S.P.S.T., SW-854	1.45	1.00
12 VDC Relay D.P.S.T., SW-856	1.45	1.20
6 RP Day Timing Motor, 117 VAC., MO-407	1.60	1.20
60 Min. Cassette, Pkg. of 3, TA-879	1.45	.87
2V. RED L.E.D., Pkg. of 5, PL-233	1.95	.59
40 Min. 8-Track Tape, TA-907	65	.39
Elect. Cap. Kit, 50 Asstd., CD-407	5.00	1.70
Resistors 1/2-watt, Pkg. 100, RR-077	1.75	.79
Volume Controls, 12 Asstd. VC-274	1.00	.49
Solder Terminal Strips, 40 Asstd. XM-501	1.30	.50

Olson electronics

260 S. FORGE ST.
DEPT. L2 AKRON, OHIO 44327

NAME _____

ADDRESS _____

CITY _____ STATE _____

ZIP _____ Send Olson Cat.

ENCLOSE POSTAGE AND SALES TAX

CIRCLE 71 ON FREE INFORMATION CARD

AUGUST 1977

85

QUALITY PARTS
GUARANTEED

2 IN 1

EASY
ASSEMBLY


COMBINED 8 DIGITS 0.5" LED 250MHz FREQ. COUNTER - 3 1/2 DIGITS MULTIMETER

- ICS SOCKETED
- PUSHBUTTON SWITCHES


- DELUXE CABINET
- COMPLETE INSTRUCTIONS

METER Section

Input protected
11 Meg Impedance
Auto Polarity
Overrange and
Negative sign indicator
4 Overlapping ranges
on AC & DC VOLT
to 1KV & Current
to 1 Amp.
5 Ranges on Ohm
Accuracy:
± 1% ± 1 Count



Model FCM-8
10W X 3 1/2"H X 9D



COUNTER Section

Input - 1 Meg. Ohm
Shunted by 3 pF.
50 mv Sensitivity
Stability - Crystal
time base - ± 5 ppm
1Hz Resolution
to 30 MHz - 10 Hz
above.



Please Add
\$2.50 Shipping
Per Unit
California Residents
Add 6% Sales Tax

INQUIRE ON OUR
LINE OF
DIGITAL CAPACITANCE
COUNTER &
FREQ. COUNTERS

SUPER VALUE!

Model FCM-8 **\$219.95** per kit

LIN CORP. 15311 S. Broadway, Gardena, California 90248 (213) 532-8809

CIRCLE 58 ON FREE INFORMATION CARD



ORGAN KITS KEYBOARDS

THE ULTIMATE IN DESIGN
AND SOUND
DEMO RECORD AND
BROCHURE \$1.00

Wurlitzer reproductions

DEVTRONIX ORGAN PRODUCTS, Dept. 4B
5872 Amapola Dr. • San Jose, CA 95129

EDUCATION & INSTRUCTION

TELEPHONE bugged? Don't be Watergated!
Countermeasures brochure \$1.00. **NEGEYE
LABORATORIES**, Box 547-RE, Pennsboro, WV
26415

F.C.C. EXAM MANUAL

PASS FCC EXAMS! Memorize, study—Tests—
Answers for FCC 1st and 2nd class Radio-
telephone licenses. Newly revised multiple
choice questions and diagrams cover all
areas tested in FCC exams, plus Self-Study
Ability Test. \$9.95 postpaid. Money-
back guarantee.



COMMAND PRODUCTIONS P.O. BOX 26348 E
RADIO ENGINEERING DIV. SAN FRANCISCO, CAL. 94126

GRANTHAM's FCC License Study Guide—377
pages, 1465 questions with answers/discus-
sions—covering third, second, first radiotele-
phone examinations. \$10.70 postpaid. **GSE
PUBLICATIONS**, 2000 Stoner, Los Angeles, CA
90025

FOR SALE

FREE catalog. IC's, Semi's. **CORONET ELEC-
TRONICS**, 649A Notre Dame W., Montreal,
Que., Canada, H3C-1H8. US Inquiries.

CARBON film resistors—1/4W, 5% (1-4M7 ohms)
3.5¢ each. 50/value—\$0.85. Postage, handling
\$1.00. Send 25¢ for catalog, sample, specifica-
tions. **COMPONENTS CENTER**, Box 134R, New
York, NY 10038

VIDEOCUBE

TV INTERFACE MODULE

This issue of RADIO-ELECTRONICS has a fine article on the VIDEOCUBE, by Glen Dash. As stated at the conclusion of the article, we have the kit for the VIDEOCUBE in two forms. The complete kit, which contains ALL the parts, and the partial kit, which contains the hard to get parts, such as the special feed thru capacitors, coils, balun transformer, transistor, PC board and shield.

The VIDEOCUBE is a TV interface module, for interfacing TV games, video cameras, and the video output of mini and micro computers. We supply a reprint of the article by Glen Dash, application data, and assembly drawings for putting your VIDEOCUBE together.

STOCK NO.5500K Complete VIDEOCUBE kit and all data.

\$13.75 ea. 2/26.00

STOCK NO.5500PK Partial kit, as listed above, with data.

\$9.75 ea. 2/18.00

WIRE WRAP PROTOTYPE BOARDS

We have 3 unique wire wrap prototype boards, with original prices up to \$175.00 EACH. These are out of systems, so you must remove the previous wire wrapping. They all contain 14 and 16 pin DIP sockets, with provision for replacing some of the 14 pin sockets with 16 pin sockets if needed. Some of the boards contain some LED indicators, miniature switches.

STOCK NO.6559R 45 to 50 sockets 11.75 ea 2/22.00
STOCK NO.6558R 75 to 100 sockets 18.75 2/36.00

STOCK NO.6572R42 to 54 sockets, with wire wrap pins brought out to top of board.
\$12.75 ea. 2/24.00

REGULATED POWER SUPPLY

5 V @ 6 A, ±12 V @ 2 A

These beautifully built supplies were removed from CODEX MODEMS. They are ideal for mini & micro computers, and any other semiconductor devices. Highly regulated. All 3 voltages are adjustable. 11"x5"x4 1/2". Wt. 12 lbs. Fused, with 5/2" 3 wire power cord. Tested and fully guaranteed.

STOCK NO.5519R \$27.50 ea. 2/50.00

TV HOCKEY and SOCCER GAME

We have one of the popular TV games, (HOCKEY & SOCCER), at 2 levels of skill. This game sold in JORDAN-MARSH, Boston department store for \$79.50 ea.

The game comes complete with a VIDEOCUBE, assembled and ready to go. The game comes unassembled, and requires about 5 minutes to put together. Contains LED readouts for automatic scorekeeping. Joystick control, not just vertical and horizontal control of players. Guaranteed. Parts are pre tested before shipping. With data and instructions. STOCK NO.5495R \$27.50 ea. 2/50.00

DELTA ELECTRONICS

P.O. Box 2,
7 Oakland St.
Amesbury, Mass. 01913



Include sufficient postage. Excess refunded. Send for new catalog 18. More electronic bargains than ever before. Visit our retail outlets; DELTA ELECTRONICS, 590 Commonwealth Ave. Boston, Mass. 02159, and DELTA ELECTRONIC HOBBIES, 5151 Buford Hwy. Doraville, (Atlanta) Ga. 30340. Master Charge & BAC accepted.

CIRCLE 57 ON FREE INFORMATION CARD

FORDHAM

BEST BUYS

BK PRECISION

TV Test Equipment



Television Analyst Model 1077B

- Cuts troubleshooting time in half ■ Provides signal substitution for the entire range of signals present in any TV set, black-and-white or color ■ Horizontal and vertical drive for solid state and tube type circuits
- Audio output ■ Built-in scanner for test-pattern slices (supplied) or any 3 x 4" positive transparency
- High-voltage indication ■ 8 VHF channels... all UHF channels 14-E3



Model 415


Solid State Sweep/Marker Generator

- Four instruments in one: sweep generator; marker generator; marker adder; bias supply ■ Complete accessory pack ■ All intercabling changes and generator selections accomplished internally with master function switch and front panel controls ■ Concentrates all TV alignment tools (except oscilloscope and VTVM) into one, easy-to-use instrument.

CRT Restorer/Analyzers

- Test and restore CRT's faster with fewer callbacks ■ Exclusive multiplex technique tests all three guns of color CRT simultaneously under actual operating conditions... even CRT's with common G1 and G2
- Uses the most powerful restoration method known with minimal danger to CRT-guarantee with confidence!
- All CRT's checked identically — including all "inline" and "one-gun" types

Model 467

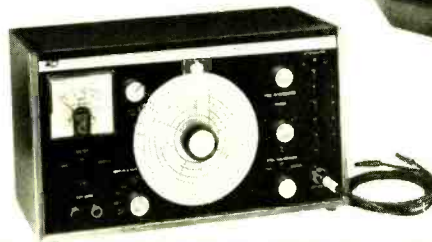

Model E 200D

Solid-State RF Signal Generators

- 100 kHz to 216 MHz in 5 bands ■ Six individually shielded step attenuators plus variable fine output level control with calibrated meter provide widest range of outputs with known signal levels ■ Double shielding eliminates spurious radiation even at outputs of 1 μ V ■ Internal crystal calibrator has accuracy of better than 0.1%



Model 1248

Digital IC Color Generator/Analyst

- Generates 9 patterns and logic functions
- Locate dead IF stages ■ Check operation of mixer, RF and local oscillators ■ Check stages sequentially
- Locate color shifts and internal ghosts from RF, mixer, IF or video stages. Plus all standard color generator uses
- Switchable horizontal and vertical sync output
- Sync level independent of video level control
- Crystal controlled RF and IF outputs

FOR PRICING AND TO PLACE YOUR ORDER


Call collect for Mr. Louis (516) 752-0050

Master Charge, BankAmericard and C.O.D.'s accepted

FORDHAM

RADIO SUPPLY CO., INC.
855R Conklin St.
Farmingdale, N.Y. 11735

YOUR ONE STOP DISCOUNT CENTER

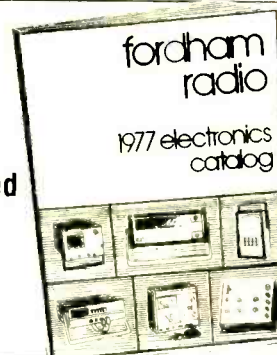


FREE

148 page catalog of over 3000 items... test equipment, CB, tools, tubes, components and a full line of electronic supplies

GODBOUT

BILL GODBOUT ELECTRONICS
BOX 2355, OAKLAND AIRPORT, CA 94614


TERMS: Allow up to 5% for shipping; excess refunded. Orders under \$10 add 50¢. For BankAmericard® or MasterCard® (\$15 min) call (415) 562-0636, 24 hrs. Cal res add tax. Thanks for your business!



\$1.50
TRANSFORMER!
THRU END OF AUGUST

Regular price \$1.95
12V-350 MA
SPECIALS GOOD THRU

\$1.95
RECTIFIER!
w/ HEAT SINK & SOCKET



30A DC 10-3
Full wave center tap
Case = cathode.
Supply 2 pins = anodes of
two diodes

MORE MUSIC KITS

These parts kits contain PC board, electronic components, pots, and socket(s). User supplies jacks, switches, case, other mechanical items. **10 DAY OP-TION:** look your kit over for 10 days; if it's not to your liking, return unassembled for refund.
All kits designed by Craig Anderton, columnist for Guitar Player magazine.

PHASE SHIFTER \$39.95
720°, low noise shifter. Wide range speed control plus depth and volume. Vibrato option.

TALKING BOX \$19.95
Low power, excellent for studio; does not require separate amp. Includes fuzz to add sustain with guitar. Requires about \$20 worth of extra parts.

REVERB UNIT \$12.50
Plugs between guitar and amp for concert hall effects. Springs not included but source is listed.

TUBE SOUND FUZZ \$13.95
FET distortion unit mimics sound of old tube amps.

CIRCLE 32 ON FREE INFORMATION CARD



AM/FM RADIO \$10

Plugs into wall, add your 2 speakers and you're ready to go. Calibrated slo motion am/fm tuning dial. Has stereo amps for use with phono or tape inputs to give stereo output. Solid state new.



UNIVERSAL POWER SUPPLY

Operates on 115 or 230V. Output by switches 4.5VDC, 6 VDC, 7.5VDC or 9 VDC. Also has universal 4 way output plug to fit most any device. Good for 300 MA. \$6.00 each 3 for \$15.00.

CHARACTER GENERATOR CHIP \$6.00
Memory is 512X5 produces 64 five by seven ASCII characters. New by National, w/specs

TOUCHTONE ENCODER CHIP \$6.00
Compatible w/Bell system. Ideal for repeater work. W/specs

SMOKE - FIRE -- INTRUDER ALARM \$22.00
12 VDC w/ 5 inch loud bell, w/instructions. Fine biz. for car, camper, boat, home W/ instructions

customer pays all postage
MESHNA, PO BOX 62, E. Lynn Ma 01904

CIRCLE 53 ON FREE INFORMATION CARD

ADVERTISING INDEX

RADIO-ELECTRONICS does not assume any responsibility for errors that may appear in the index below.

Free Information Number Page

52	Acoustic Fiber Sound Systems	26
14	Advance Electronics	80
24	Allison	61
5	American Technology	78
76	AP Products	22
61	B&K-Div. of Dynascan	27
3	Castle Electronics	73
3	CIE-Cleveland Institute of Electronics	18-21
3	Cobra-Div. of Dynascan	Cover IV
49	Consumer Trade Fair	66
49	Continental Specialties	25
39	CREI-Div. of McGraw-Hill Continuing Education	62-65
168,7	Dana Labs	78
64	Data Precision	17
51	Digital Concepts	84
33	EDC	Cover II
67	Edmund Scientific	106
12	EICO	72
15	EMC-Electronic Measurements	83
8	Enterprise Development	80
28,65,66	Fidelity Sound	83
63	Florida Institute of Technology	74
63	Fluke	67,69,71
63	Grantham College of Engineering	73
63	GTE-Sylvania-Consumer Renewal	23
100	Hal Communications	76
6	Health	5
13	Hickok Electrical Instruments	77
17	Ignition Systems	78
47	Indiana Home Study	82
31	International Crystal	81
30	Kager International	75
27	McKay-Dymek	68
18	Motorola Semiconductor Products	14
16	Mountain West Alarm Supply	79
16	National Camera Supply	76
16	National Radio Institute (NRI)-Div. of McGraw-Hill Continuing Education Center	8-11
16	National Technical Schools	28-31
77	Nesda	84
44	OK Machine & Tool	61
10	PAIA	76
62	PTS Electronics	75
75	Panavise-Div. of Colbert Industries	82
26	Philips Test & Measuring Division	24
45	Platt Luggage	24
45	Radio Shack	15
60	RCA Distributor & Special Products	16
73	Rye Industries	83
34	Sabtronics International	1
4	Schober Organ	82
4	Sencore	32
74	Shakespeare	7
11	TAB Books	69
43	Telematic-Div. of UXL	79
9	Tri-Star	84
25	Ungar Tools	13
46	VIZ Mfg.	80
2	Vaco	Cover III
1	Weller-Xcelite-Div. of Cooper Industries	2
48	MARKET CENTER	
48	Active Electronics	97
48	American Used Computer	94
48	ATV Research	85
36	Babylon Electronics	102
36	Karel Barta	85
36	CFR Associates	85

Free Information Number Page

57	Command Productions	86
57	Dage Scientific Instruments	85
57	Delta Electronics	86
57	Devtronix Organ Products	86
69	Digi-Key	95
69	Fair Radio Sales	92
59	Fordham Radio Supply	87
41	Formula International	105
32	Godbout Electronics	88
32	Information Unlimited	92
32	Interfab	85
42	International Electronics	91
19,20	James Electronics	100,101
19,20	Lab Science	92
19,20	Lakeside Industries	94
58	Lin	86
53	Meshna	88
40	Morrow's Micro Stuff	102
55	New-Tone	92
71	Olson	85
37	Optoelectronics	99
22	Page Digital Electronics	98
22	Parasitic Engineering	92
23	Printronic	85
29	Poly Paks	93
38	Quest	94
70	Radio Hut	104
72	SD Sales	96
21	JB Saunders	103
56	Solid State Sales	98
56	Speakerlab	85
35	Trico Electronics	102
54	Wersi Electronics	92

MOVING?

Don't miss a single copy of **Radio-Electronics**. Give us:

Six weeks' notice

Your old address and zip code

Your new address and zip code

ATTACH LABEL HERE

name (please print)

address

city state zip code

Mail to: Radio-Electronics
SUBSCRIPTION DEPT., P.O. BOX 2520,
BOULDER, COLO. 80322

RADIO-ELECTRONICS

INTERNATIONAL ELECTRONICS UNLIMITED

10% OFF WITH \$25 ORDER
15% OFF WITH \$100 ORDER

THESE DISCOUNTS APPLY TO TOTAL OF ORDER — SPECIALS INCLUDED

SUMMER CLEARANCE SALE (GOOD THRU AUGUST)

MEMORIES		DIGITAL		LINEAR		SHIFT REGISTERS	
1101	\$6.69	7400	\$0.09	376 mDIP	\$0.49	2510	\$1.95
1103	.69	7416	.29	739 DIP	.89	2511	1.49
1702A	5.95	7427	.24	1414 DIP	1.39	2522	1.95
2708	24.95	7437	.19	75453 mDIP	.29	5016	1.39
5262	.99	7454	.12	75491 DIP	.59		
74S200	3.25	7493	.39				
7489	1.75	7495	.69	LED DISPLAYS		DISCRETE LEDs	
82S23	2.75	74145	.89	DL10A	\$1.49	MVIOB	6/5 \$1.00
93410	1.39	9602	.59	NSN 74R	.99	MV50	16/3 \$1.00
		74C154	2.49	FND 359	.59	MINI RED	
				MAN 5	.99	RL 209	12/5 \$1.00

TTL

7400	.13	7451	.17	74153	.89
7401	.16	7453	.17	74154	1.20
7402	.15	7454	.17	74155	.97
7403	.15	7460	.30	74156	.97
7404	.16	7464	.35	74157	.99
7405	.19	7465	.35	74158	1.79
7406	.20	7470	.30	74160	1.23
7407	.28	7472	.30	74161	.97
7408	.26	7473	.35	74162	1.39
7409	.19	7474	.28	74163	1.09
7410	.16	7475	.49	74164	.99
7411	.25	7476	.30	74165	.99
7413	.43	7483	.68	74166	1.25
7414	.65	7485	.88	74170	2.10
7416	.35	7486	.40	74173	1.49
7417	.35	7489	2.25	74174	.623
7420	.16	7490	.43	74175	.97
7422	.30	7491	.75	74176	.89
7423	.29	7492	.48	74171	.84
7425	.27	7493	.48	74180	.90
7426	.26	7494	.78	74181	2.45
7427	.29	7495	.79	74182	.79
7430	.20	7496	.79	74184	1.90
7432	.23	74100	.98	74185	2.20
7437	.25	74105	.44	74187	5.75
7438	.25	74107	.37	74190	1.15
7440	.15	74121	.38	74191	1.25
7441	.89	74122	.68	74192	.95
7442	.59	74123	.35	74193	.85
7443	.73	74125	.54	74194	1.25
7444	.73	74126	.58	74195	.74
7445	.73	74132	.89	74196	1.25
7446	.81	74141	1.04	74197	.73
7447	.79	74145	1.07	74198	1.73
7448	.79	74150	.97	74199	1.69
7450	.17	74151	.79	74200	5.45

LOW POWER

74100	.29	74151	.29	74190	1.40
74102	.29	74155	.29	74191	1.20
74103	.23	74171	.29	74193	1.50
74104	.29	74172	.45	74195	1.50
74106	.29	74173	.56	74198	2.25
74110	.29	74174	.56	74164	2.25
74120	.29	74178	.75	74165	2.30
74130	.29	74185	1.09		
74142	1.39	74186	.65		

LOW POWER SCHOTTKY

74LS00	.36	74LS32	.38	74LS95	2.09
74LS02	.36	74LS40	.45	74LS107	.59
74LS04	.36	74LS42	.40	74LS164	2.20
74LS08	.38	74LS74	1.59	74LS193	2.20
74LS10	.36	74LS90	1.30	74LS197	2.20
74LS20	.36	74LS93	1.30		

HIGH SPEED

74H00	.25	74H22	.25	74H61	.25
74H01	.25	74H30	.25	74H62	.25
74H04	.25	74H40	.25	74H74	.39
74H08	.25	74H50	.25	74H101	.58
74H10	.25	74H52	.25	74H102	.58
74H11	.25	74H53	.25	74H103	.60
74H20	.25	74H55	.25	74H106	.72
74H21	.25	74H60	.25	74H108	.72

CMOS

4000A	.26	4018A	1.39	4066A	.89
4001A	.25	4020A	1.72	4068A	.44
4002A	.25	4021A	1.18	4069A	.44
4006A	1.35	4022A	.94	4071A	.26
4007A	.26	4023A	.25	4072A	.35
4008A	1.52	4024A	.89	4073A	.39
4009A	.57	4025A	.25	4075A	.39
4010A	.54	4027A	.59	4078A	.39
4011A	.29	4028A	.98	4082A	.35
4012A	.25	4030A	.44	4518A	1.56
4013A	.45	4035A	1.27	4528A	2.10
4014A	1.27	4040A	1.39	4585A	2.56
4015A	1.27	4042A	1.47		
4016A	.48	4049A	.59		
4017A	1.01	4050A	.59		

74C00	.19	74C74	1.04	74C162	2.49
74C02	.26	74C76	1.34	74C163	2.66
74C04	.44	74C107	1.13	74C164	2.66
74C08	.68	74C151	2.62	74C173	2.22
74C10	.35	74C154	3.15	74C195	2.26
74C20	.35	74C157	1.76	80C95	1.15
74C42	1.61	74C160	2.48	80C97	.96
74C73	1.04	74C161	2.49		

CALCULATOR CHIPS

CTS002	12 digit, 4 function fixed decimal battery operation — 40 pin	1.95
CTS005	12 digit, 4 function plus memory, fixed decimal — 20 pin	2.49
MM5725	8 digit, 4 function, floating decimal 18 pin	1.98
MM5736	6 digit, 4 function, 9V battery operation — 18 pin	2.95
MM5738	8 digit, 5 function plus memory and constant floating decimal, 9V battery operation — 24 pin	3.95
MM5739	9 digit, 4 function, 9V battery operation — 22 pin	3.95

SPECIAL SALE

HP 5082-SERIES

MAG LENS FITS 14 PIN SOCKET
5 DIGIT RED .11 CC RHD \$.57 ea.
4 DIGIT RED .11" CC RHD

SPECIAL DEVICES

372	AF-IF Strip Detector DIP	2.93
546	AM Radio Receiver Subsystem DIP	.75
1310	FM Stereo Demodulator DIP	2.90
1496	Balanced Modulator-Demodulator	.99
1800	Stereo Multiplexer DIP	2.48
ULN2208	FM Gain Block 34db (typ) mDIP	1.18
ULN2209	FM Gain Block 48db (typ) mDIP	1.35
2513	Character Generator 64x8x5 DIP-24	10.20
3046	Transistor Array DIP-14	.73

LED DISPLAYS

DL10A	RED CA .27" LHD	\$1.89
DL 707	RED CA .30" RHD	1.49
DL 507	RED CA .50" RHD	1.49
FND 359	RED CC .375" RHD	.89
DL 702	RED CC .30" LHD	1.39
NSN 74R	RED CC .30" RHD	1.49
DL 500	RED CC .50" RHD	1.49
MAN5	GREEN CA .27" LHD	1.39
MAN8	YELLOW CA .27" LHD	1.39
MAN2	YELLOW CA .37" LHD	1.89
MAN66	RED CA .5" LHD	2.19
DL747	RED CA .6" LHD	2.39

DISCRETE LED's

ME4	INFRARED CLEAR DOME 170"	EACH .29
MV10B	CLEAR DOME .170"	.25
MV50	CLEAR — AXIAL .09"	.12
MV50	RED — AXIAL .09"	.12
NSL100	RED .19"	.12
RL209	RED DIFF. SUBMINIATURE .12"	.12
RLT-T1-03	WHITE DIFF. SUBMINIATURE NO FLANGE .124"	.15
RLC-200	RED DIFF. CURRENT REG. .190" CONST. BRIGHTNESS 4.5-12.5V	.25
RLC-201	RED DIFF. CURRENT REG. CONST. BRIGHTNESS 4.5-1.90"	.25
RL-4403	RED DIFF. FULL FLOOD .190"	.15
GREEN	SPOT .190"	.18
CLEAR	POINT .190"	.15

MULTIPLE DISPLAYS

NSN 33	3 DIGIT RED .12" CC FITS 14 PIN SOCKET	\$.99
DL 33 B	3 DIGIT RED .17" CC MAG. LENS FITS 14 PIN SOCKET	.99
DL 33-B	SAME AS DL33B EXCEPT — 8 DIGITS	.59
HP 5082-7414	4 DIGIT RED .11" CC RHD MAG LENS FITS 14 PIN SOCKET	1.29
HP 5082-SERIES	5 DIGIT RED .11 CC RHD MAG. LENS FITS 14 PIN SOCKET	1.39

MM 5330
4 1/2 DIGIT DVM LOGIC \$6.95

LH 0070
BCD BUFFERED REF. \$6.95

LF 13300D
DUAL SLOPE A/D \$12.95
ANALOG BUILDING BLOCK

MM 5616
QUAD BI-LATERAL SWITCH \$1.25

Date sheets on request. Add 30¢ each if item is priced below \$1.00 each.

DL702
RED CC DISPLAY \$.99

2102 \$1.49
1024X1 STATIC RAM 16 PIN

UART
AYS1013A \$6.95

KEYBOARD
20 KEYS
2 SLIDE SW
3" x 3" \$.99

CALCULATOR DISPLAY
9 MAN 3 M
ON PC BOARD
99 ¢

IC SOCKETS
Solder Tail - low profile

8 pin	.17	24 pin	.42
14 pin	.20	28 pin	.59
16 pin	.22	40 pin	.69
18 pin	.29		

WIRE WRAP - gold plate
14 pin .49

CLOCK CHIPS

MM5314	6 digit multiplexed 12-24 Hr, 50-60 Hz 24 pin	4.45
MM5316	4 digit, 12-24 Hr, 50-60 Hz, alarm 40 pin	4.95
IS375AA	4-6 digit, 12 hour, 60 Hz snooze alarm brightness control capability, alarm tone output — 24 pin	4.95
CT7001	6 digit, 12-24 Hr, 50-60 Hz, alarm, timer and date circuits — 28 pin	6.95

SHIFT REGISTERS

2502	1024 bit MULT DYN 16 pin	\$3.75
2504	1024 bit MULT DYN 8 pin	3.75
2511	Tri-State Dual 50-100-200 bit STATIC 14 pin	2.95
2518	Hex 32-bit STATIC 16 pin	2.95
2519	Hex 40-bit STATIC 16 pin	2.95
2527	Dual 256 bit STATIC 8 pin	2.95
2532	Quad 80 bit STATIC 16 pin	3.95
5013	1024 bit accum. Dynamic 8 pin	1.75
5016	500/512 bit Dynamic 8 pin	1.59

MM5369 Divider mDIP \$2.35
Crystal 3.58 MHz color TV \$1.50

OPTO ISOLATORS

MCT D	Opto isolator diode	1.09
MCT T	Opto isolator transistor	.70

1458 \$3.99
DUAL OP AMP

LINEAR CIRCUITS

300	Pos V Reg (super 723) TO-5	\$.71
301	Hi Perf Op Amp mDIP TO-5	.59
302	Volt follower TO-5	.23
304	Neg V Reg TO-5	.80
305	Pos V Reg TO-5	.71
307	Op AMP (super 741) mDIP TO-5	.26
308	Micro Pwr Op Amp mDIP TO-5	.89
309K	5V 1A regulator TO-3	1.07
310	V Follower Op Amp mDIP	1.15
311	Hi per V Comp mDIP TO-5	.95
319	Hi Speed Dual Comp DIP	1.13
1201	Neg Reg 5.12 TO-220	1.39
120A	Neg Reg 5.2, 12 TO-1	1.39
322	precision Timer DIP	1.70
324	Quad Op Amp DIP	1.52
339	Quad Comparator DIP	1.58
140K	Pos V reg (5V, 6V, 8V, 12V, 15V, 18V, 24V) TO-3	1.69
3401	Pos V reg (5V, 6V, 8V, 12V, 15V, 18V, 24V) TO-220	1.49
372	AF-IF Strip detector DIP	2.93
373	AM/FM/SSB Strip DIP	2.42
376	Pos V Reg mDIP	.68
380	2w Audio Amp DIP	1.30
380-B	.5w Audio Amp mDIP	1.25
381	Lo Noise Dual preamp DIP	1.75
382	Lo Noise Dual preamp Dip	1.75
531	High Slew rate Op Amp	2.95
540	Power driver TO-5	.29
550	Prec V Reg DIP	.75
555	Timer mDIP	.45
556A	Dual 555 Timer DIP	1.19
560	Phase Locked Loop DIP	3.39
562	Phase Locked Loop DIP	3.39
565	Phase Locked Loop DIP TO-5	1.18
566	Function Gen mDIP TO-5	1.95
567	Tone Decoder mDIP	1.95
709	Operational AMP TO-18 on DIP	.26
710	Hi Speed Volt Comp DIP	.35
711	Dual Difference Compar DIP	.26
723	V Reg DIP	.62
733	Diff. video AMPL TO-5	.89
739	Dual Hi Per Op Amp DIP	1.07
741	Comp Op Amp mDIP TO-5	.32
747	741 Dual Op Amp DIP for TO-5	.71
748	Freq Adj 741 mDIP	.35
1458	Dual Comp Op Amp mDIP	.62
1800	Stereo multiplexer DIP	2.48
3900	Quad Amplifier DIP	.49
7524	Core Mem Sense AMP DIP	.71
7525	Core Mem Sense AMP DIP	.90
8018	Voltage contr. osc. DIP	4.25
8864	9 DIG Led Cath Drvr DIP	2.25
75150	Dual Line Driver DIP	1.75
75451	Dual Peripheral Driver mDIP	.35
75452	Dual Peripheral Driver mDIP	.35
75453	(351) Dual Periph Driver mDIP	.35
75491	Quad Seg Driver for LED DIP	.71
75492	Hex Digit driver DIP	.80

CENTRAL PROCESSING UNIT

8008 \$18.95
8080A \$19.95

FREE CATALOG AVAILABLE ON REQUEST

Satisfaction guaranteed. Shipment will be made postage prepaid within 3 days from receipt of order. Payment may be made with personal check, charge card (include number and exp. date), or money order. Phone Orders — BolA and M/C card ok. C.O.D.

Add \$1.00 to cover shipping and handling if order is less than \$10.00. California residents add sales tax. Include shipping expense for orders shipped out of U.S. and Canada approx. 10% of order.

INTERNATIONAL ELECTRONICS UNLIMITED
VILLAGE SQUARE, P.O. BOX 449
CARMEL VALLEY, CA 93924 USA
PHONE (408) 659-3171

Try this exciting new hobby! Build your own electronic concert organ. It's easy. No technical knowledge required. Just follow the clearly pictured instructions of the famous Wersi do-it-yourself system. Choose from seven different models. Send \$2.00 (refundable) with coupon for colorful 104 page catalog.

WERSI




Wersi Electronics, Inc.
Dept. 24, Box 5318
1720 Hempstead Road
Lancaster, PA 17601

Enclosed is \$2.00 for my copy of your 104 page catalog.

Name _____
Address _____
City _____ State _____ Zip _____

CIRCLE 54 ON FREE INFORMATION CARD

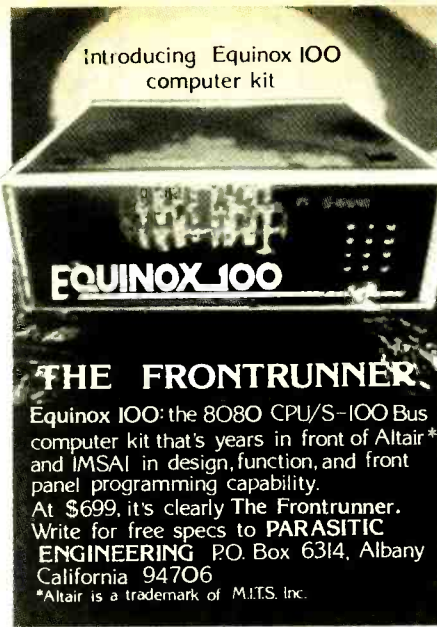

THE FRONTRUNNER

Equinox 100: the 8080 CPU/S-100 Bus computer kit that's years in front of Altair* and IMSAI in design, function, and front panel programming capability. At \$699, it's clearly The Frontrunner. Write for free specs to PARASITIC ENGINEERING P.O. Box 6314, Albany California 94706
*Altair is a trademark of M.I.T.S. Inc.

NAME brand digital/analog test equipment. Discount prices. Free catalog. SALEN ELECTRONICS, P.O. Box 82, Skokie, IL 60076

AMAZING ELECTRONIC PROJECTS and PRODUCTS:

Lasers Super Powered, Burning, Cutting, Rifle, Pistol, Pocket. See in Dark—Shotgun Directional Mike—Unscramblers—Giant Testa—Stunwand—TV Disrupter—Energy Producing, Surveillance, Detection, Electrifying, Ultrasonic, Cur, Auto and Mech. Devices, Hundreds More—All New Plus INFO UNLTD PARTS SERVICE. Catalog \$1. Information Unlimited, Box 626, Lord Jeffery Court, Amherst, N.H. 03031.

RECONDITIONED test equipment. \$0.50 for catalog. WALTER'S TEST EQUIPMENT, 2697 Nickel, San Pablo, CA 94806

Govt. SURPLUS ELECTRONIC EQUIPMENT CATALOG

New ITEMS... New BARGAINS! **FREE UPON REQUEST!** If you haven't received our new Catalog, write for free copy today. Address: Dept. RE

FAIR RADIO SALES
1016 E. EUREKA • Box 1105 • LIMA, OHIO • 45802

FREE catalog. Solar cells, NiCad's, kits, calculators, digital watch modules, ultrasonics, strobes, LED's, transistors, IC's, unique components. CHANEY'S, Box 27038, Denver, CO 80227

EC-101 CURVE TRACER
STILL BY FAR THE LOWEST COST FULL FUNCTION CURVE TRACER ON THE MARKET. ATTACHES TO YOUR SCOPE IN SECONDS. USED BY EDUCATORS, PROFESSIONALS AND HOBBYISTS ALL OVER THE WORLD. 30 DAY MONEYBACK GUARANTEE.

lab science
STILL ONLY \$29.50 ADD \$2.00 P&H
COLO. RES. ADD 3 1/4% SALES TAX

PO BOX 1972, BOULDER, COLO. 80306

SAVE on television tuner repairs, tuner parts, modules and test equipment. \$1.50 refundable catalog. OZ'S TUNER SERVICE, Box 2464, La Puente, CA 91746

QUADRUPLER detector, shielded, insulated, unbreakable leads, with BNC connector. August special \$6.95. Cables, jigs, detectors, for all brands described in free brochure. Write Irving Tjomsland, dba TEST ANALYST, Box 6121, Huntington Beach, CA 92646

CB SPECIALS—R.F. DRIVERS—R.F. POWER OUTPUTS—FETS

2SC481	1.85	2SC767	15.75	2SC866	5.85	2SC1449-1	1.60	40081	1.50
2SC482	1.75	2SC773	.85	2SC1013	1.50	2SC1475	1.50	40082	3.00
2SC495	1.10	2SC774	1.75	2SC1014	1.50	2SC1678	5.50	2SC608	4.85
2SC502	3.75	2SC775	2.75	2SC1017	1.50	2SC1679	4.75	SK3046	2.15
2SC517	4.75	2SC776	3.00	2SC1018	1.50	2SC1728	2.15	SK3047	3.75
2SC614	3.80	2SC777	4.75	2SC1173	1.25	2SC1760	2.15	SJ2095	3.50
2SC615	3.90	2SC778	3.25	2SC1226A	1.25	2SC1816	5.50	SK3048	3.25
2SC616	4.15	2SC797	2.50	2SC1237	4.50	2SC1908	.70	SK3054	1.25
2SC617	4.25	2SC798	3.10	2SC1239	3.50	2SC1957	1.50		
2SC699	4.75	2SC781	3.00	2SC1243	1.50	2SF8	3.00	2SK19	1.75
2SC710	.70	2SC789	1.00	2SC1306	4.75	HEP-S 3001	3.25	2SK30	1.00
2SC711	.70	2SC796	3.15	2SC1306-1	4.90	2SD235	1.00	2SK33	1.20
2SC735	.70	2SC799	4.25	2SC1307	5.75	MRF8004	3.00	3SK40	2.75
2SC756	3.00	2SC802	3.75	2SC1307-1	6.00	4004	3.00	3SK45	2.75
2SC765	9.50	2SC803	4.00	2SC1377	5.50	4005	3.00	3SK49	2.75
2SC766	10.15	2SC839	.85	2SC1449	1.30	40080	1.25		

JAPANESE TRANSISTORS

2SA52	.60	2SB187	.60	2SC458	.70	2SC815	.75	2SC1569	1.25
2SA316	.75	2SB235	1.75	2SC460	.70	2SC828	.75	2SC1756	1.25
2SA473	.75	2SB303	.65	2SC478	.80	2SC829	.75		
2SA483	1.95	2SB324	1.00	2SC491	2.50	2SC830	1.60	2SD30	.95
2SA489	.80	2SB337	2.10	2SC497	1.60	2SC839	.85	2SD45	2.00
2SA490	.70	2SB367	1.60	2SC515	.80	2SC945	.65	2SD65	.75
2SA505	.70	2SB370	.65	2SC535	.75	2SC1010	.80	2SD68	.90
2SA564	.50	2SB405	.85	2SC536	.65	2SC1012	.80	2SD72	1.00
2SA628	.65	2SB407	1.65	2SC537	.70	2SC1051	2.50	2SD88	1.50
2SA643	.85	2SB415	.85	2SC563	2.50	2SC1061	1.65	2SD151	2.25
2SA647	2.75	2SB461	1.25	2SC605	1.00	2SC1079	3.75	2SD170	2.75
2SA673	.85	2SB463	1.65	2SC620	.80	2SC1096	1.20	2SD180	2.00
2SA679	3.75	2SB471	1.75	2SC627	1.75	2SC1098	1.15	2SD201	1.95
2SA682	.85	2SB474	1.50	2SC642	3.50	2SC1115	2.75	2SD218	4.75
2SA699	1.30	2SB476	1.25	2SC643	3.75	2SC1166	.70	2SD300	2.50
2SA699A	1.75	2SB481	2.10	2SC644	.70	2SC1170	4.00	2SD313	1.10
2SA705	.55	2SB492	1.25	2SC681	2.50	2SC1172B	4.25	2SD315	.75
2SA715	.85	2SB495	.95	2SC684	2.10	2SC1209	.55	2SD318	.95
2SA816	.85	2SB507	.90	2SC687	2.50	2SC1213	.75	2SD341	.95
		2SB511	.70	2SC696	2.35	2SC1226	1.25	2SD350	3.25
				2SC712	.70	2SC1243	1.50	2SD352	.80
2SB22	.65			2SC713	.70	2SC1293	.85	2SD380	5.70
2SB54	.70	2SC206	1.00	2SC732	.70	2SC1308	4.75	2SD389	.90
2SB56	.70	2SC240	1.10	2SC733	.70	2SC1347	.80	2SD390	.75
2SB77	.70	2SC261	.65	2SC739	.70	2SC1383	.75	2SD437	5.50
2SB128	2.25	2SC291	.65	2SC739	.70	2SC1409	1.25		
2SB135	.95	2SC320	2.00	2SC715	1.75	2SC1410	1.25	MPS-U31	4.25
2SB152	4.50	2SC352	.75	2SC762	1.90	2SC1447	1.25	MPS8000	1.00
2SB173	.55	2SC353	.75	2SC783	1.00	2SC1448	1.25		
2SB175	.55	2SC371	.70	2SC784	.70	2SC1507	1.25		
2SB178	1.00	2SC372	.70	2SC785	1.00	2SC1509	1.25		
2SB186	.60	2SC394	.70	2SC793	2.50				

POWER-TRANSISTORS HIGH-VOLT. TV. TYPE

BU204	1300V	3.90	BU207	1300V	5.40	2SC1172B	1100V	4.25
BU205	1500V	4.70	BU208	1500V	6.25	2SC1308	1100V	4.95
BU206	1700V	5.90	2SC1170	1100V	4.00	2SC1325	1100V	4.95

CIRCLE 55 ON FREE INFORMATION CARD

OEM SPECIALS

1N270	.10	2N960	.55	2N2219A	.30	2N2913	.75	2N3740	1.00	2N4401	.20
1N914	.10	2N962	.40	2N2221	.25	2N2914	1.20	2N3771	1.75	2N4402	.20
		2N967	.50	2N2221A	.30	2N2916A	3.65	2N3772	1.90	2N4403	.20
		2N1136	1.35	2N2222	.25	2N3019	.50	2N3773	3.00	2N4409	.20
2N173	1.75	2N1142	2.25	2N2222A	.30	2N3053	.30	2N3819	.32	2N4410	.25
2N178	.90	2N1302	1.25	2N2270	.40	2N3054	.70	2N3823	.70	2N4416	.75
2N327A	1.15	2N1305	.75	2N2322	1.00	2N3055	.75	2N3856	.20	2N4441	.85
2N334	1.20	2N1377	.75	2N2323	1.00	2N3227	1.00	2N3866	.85	2N4442	.90
2N336	.90	2N1420	.20	2N2324	1.35	2N3247	3.40	2N3903	.20	2N4443	1.20
2N338A	1.05	2N1483	.95	2N2325	2.00	2N3250	.50	2N3904	.20	2N4852	.55
2N398B	.90	2N1540	.90	2N2326	2.85	2N3375	6.50	2N3905	.20	2N5061	.30
2N404	.75	2N1543	2.70	2N2327	3.80	2N3393	.20	2N3906	.25	2N5064	.50
2N443	1.75	2N1544	.80	2N2328	4.20	2N3394	.17	2N3925	3.75	2N5130	.20
2N456	1.10	2N1549	1.25	2N2329	4.75	2N3414	.17	2N3954	3.50	2N5133	.15
2N501A	3.00	2N1551	2.50	2N2368	.25	2N3415	.18	2N3954A	3.75	2N5138	.15
2N508A	4.05	2N1552	3.25	2N2369	.25	2N3416	.19	2N3955	2.45	2N5198	3.75
2N555	.45	2N1554	1.25	2N2484	.32	2N3417	.20	2N3957	1.25	2N5294	.50
2N652A	.85	2N1557	1.15	2N2712	.18	2N3442	1.85	2N3958	1.20	2N5296	.50
2N677C	6.00	2N1560	2.80	2N2894	.40	2N3553	1.50	2N4037	.60	2N5306	.20
2N706	.25	2N1605	.35	2N2903	3.30	2N3563	.20	2N4093	.85	2N5354	.20
2N706B	.40	2N1613	.30	2N2904	.25	2N3565	.20	2N4124	.20	2N5369	.20
2N711	.50	2N1711	.30	2N2904A	.30	2N3638	.20	2N4126	.20	2N5400	.40
2N711B	.60	2N1907	4.10	2N2905	.25	2N3642	.20	2N4141	.20	2N5401	.50
2N718	.25	2N2060	1.85	2N2905A	.30	2N3643	.15	2N4142	.20	2N5457	.35
2N720A	.50	2N2102	.40	2N2906	.25	2N3645	.15	2N4143	.20	2N5458	.30
2N918	.35	2N2118	.25	2N2906A	.30	2N3646	.14	2N4220A	.45	CI03Y	.25
2N930	.25	2N218A	.30	2N2907	.25	2N3730	1.50	2N4234	.95	CI03D	.40
2N956	.30	2N2219	.25	2N2907A	.30	2N3731	2.75	2N4400	.20	CI06B1	.50
										CI06D1	.75

SILICON UNIUNCTIONS		INTEGRATED CIRC.		RECTIFIERS			
2N2646	.50	2N4871	.50	UA703C	.40		
2N2647	.60	2N4891	.50	709C OP. AMP.	.25		
2N6027	.55	2N4892	.50	741C OP. AMP.	.25		
2N6028	.70	2N4893	.50	7400	.15		
D5E37	.25	2N4894	.50	TA7061P	3.50		
2N2160	.65	MU10	.40	TA7205P	8.00		
2N4870	.50			UPC1001h2	6.00		
				Ne555	1.25		
					10	100	
					IN4001	.60	5.00
					IN4002	.70	6.00
					IN4003	.80	7.00
					IN4004	.90	8.00
					IN4005	1.00	9.00
					IN4006	1.10	10.00
					IN4007	1.20	11.00



New-Tone Electronics
P.O. Box 1738 A
Bloomfield, N.J. 07003
Phone: (201) 748-6171
748-6172
748-6173

ALL PARTS GUARANTEED

N.J. residents add 5% sales tax. Minimum order \$5.00. All orders add \$1.00 postage. Dealers write or phone for discount prices.

PICTURE TUBE MACHINE
 We buy and sell NEW and USED CRT
 rebuilding machinery. COMPLETE
 TRAINING. Buy with CONFIDENCE from
 the ORIGINAL MFR.
 For complete details send name, address,
 zip to:
LAKESIDE INDUSTRIES
 3520 W. Fullerton Ave.
 Chicago, Ill. 60647
 Phone: 312-342-3399



CANADIAN electronics surplus catalog mailed anywhere in the world. Jam packed with exciting items and unusual and hard to find parts for hobbyist, industry and schools. Thousands of super surplus bargains in parts, semis, kits, test gear, tubes, accessories, CB, telephones, calculators, etc. Over 100 top name stereo brands discounted. Amazing values for everyone. We are big buyers of factory clear-outs, distress merchandise and government surplus. Rush \$1. **ETCO-RE**, 521 5th Ave., NYC 10017

POWERFUL, adjustable, regulated, three output power supply and 900 easily removable parts in complete Cartrivision television recorder electronic assembly with documentation. Perfect for microprocessor, IC, transistor, television, CB radio applications. \$21.45. Free brochure. **MADISON ELECTRONICS, INCORPORATED**, 369, D101, Madison, AL 35758. Satisfaction guaranteed.

SLEEP undisturbed! Mask unwanted sound with soothing "pink noise" generator. \$57.50. **GOLDEN ENTERPRISES**, Box 1282-RE, Glendale, AZ 85311

HARDCOPY. Attachment converts Smith-Corona typewriters, others, into microcomputer printer. Free brochure. **STOUT MICROCOMPUTER**, Box 1573, Fremont, CA 94538

FREE catalog of goodies—clock kits, power supplies, DVM kits, LED's, semis, all at lowest prices. **DIAMONDBACK**, PO Box 194R, Spring Valley, IL 61362

COMPUTER WAREHOUSE STORE
 Dept R
 P.O. Box 68, Kenmore Station
 Boston, MA 02215
 617-261-2700

★ ONE DAY SHIPMENT ★
GREEN PHOSPHOR VIDEO MONITOR
 \$150 + \$25 Shipping & Handling

16 MHz bandwidth, Standard Raster Scan, 24 lines x 80 char.

THOUSANDS OF KITS AND PERIPHERALS

SPECIAL DISCOUNTS!
 If you buy used equipment peripherals at the same time you buy our kit(s):
 20% off Kit Price if over \$900
 10% off Kit Price if over \$250
 5% off Kit Price if over \$95
 (\$200 Maximum Discount)

SEND \$1 FOR OUR CATALOG
 Describes complete line of Kits & Units. "All About Hobby Microcomputers", Largest selection of Computer Books, Microprocessor Comparison Chart and MUCH MORE

FERRIC chloride etching liquid. Pints, quarts, gallons. Send sase. **BOB'S ELECTRONICS**, Box 393-R, Bay City, MI 48707

MANUALS for Govt. surplus radios, test sets, scopes. List 50¢ (coin). **BOOKS**, 7218 Roanoke Drive, Washington, D.C. 20021

MAKE professional-quality PC boards with silk-screen techniques. Complete step by step information, \$4.95 Postpaid. **TERRATRONIC RESEARCH**, Box 513A, Quincy, IL 62301

PRINTED circuit supplies. A process that always works. Send stamp. **CIRCOCLEX**, Box 198, Marcy, NY 13403

P.O. Box 4430E Santa Clara, CA 95054 (408) 988-1640

Quest ELECTRONICS

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

7400TL	17	74LS289	39	LM377	4.50	CD4038	1.50	74C00	38
7400N	17	74LS290	46	LM389	3.00	CD4040	80	74C04	33
7400T	17	74LS291	65	LM390	1.00	CD4041	50	74C10	28
7400V	17	74LS292	110	LM391	1.00	CD4042	25	74C15	21
7401N	17	74LS293	180	LM392	1.00	CD4043	125	74C20	28
7414N	63	74LS107	52	LM393	1.00	CD4044	75	74C21	28
7420N	17	74LS117	50	LM394	1.00	CD4045	75	74C22	28
7422N	139	74LS119	50	LM395	1.00	CD4046	25	74C23	28
7424N	20	74LS121	115	LM396	1.00	CD4047	20	74C24	28
7425N	18	74LS122	160	LM397	1.00	CD4048	25	74C25	28
7426N	65	74LS123	160	LM398	1.00	CD4049	25	74C26	28
7427N	60	74LS124	150	LM399	1.00	CD4050	25	74C27	28
7428N	78	74LS125	160	LM399A	1.00	CD4051	25	74C28	28
7429N	17	74LS126	205	LM399B	1.00	CD4052	25	74C29	28
7430N	32	74LS127	205	LM399C	1.00	CD4053	25	74C30	28
7431N	49	74LS128	165	LM399D	1.00	CD4054	25	74C31	28
7432N	200	74LS129	205	LM399E	1.00	CD4055	25	74C32	28
7433N	45	74LS130	205	LM399F	1.00	CD4056	25	74C33	28
7434N	45	74LS131	205	LM399G	1.00	CD4057	25	74C34	28
7435N	45	74LS132	205	LM399H	1.00	CD4058	25	74C35	28
7436N	45	74LS133	205	LM399I	1.00	CD4059	25	74C36	28
7437N	45	74LS134	205	LM399J	1.00	CD4060	25	74C37	28
7438N	45	74LS135	205	LM399K	1.00	CD4061	25	74C38	28
7439N	45	74LS136	205	LM399L	1.00	CD4062	25	74C39	28
7440N	45	74LS137	205	LM399M	1.00	CD4063	25	74C40	28
7441N	45	74LS138	205	LM399N	1.00	CD4064	25	74C41	28
7442N	45	74LS139	205	LM399P	1.00	CD4065	25	74C42	28
7443N	45	74LS140	205	LM399Q	1.00	CD4066	25	74C43	28
7444N	45	74LS141	205	LM399R	1.00	CD4067	25	74C44	28
7445N	45	74LS142	205	LM399S	1.00	CD4068	25	74C45	28
7446N	45	74LS143	205	LM399T	1.00	CD4069	25	74C46	28
7447N	45	74LS144	205	LM399U	1.00	CD4070	25	74C47	28
7448N	45	74LS145	205	LM399V	1.00	CD4071	25	74C48	28
7449N	45	74LS146	205	LM399W	1.00	CD4072	25	74C49	28
7450N	45	74LS147	205	LM399X	1.00	CD4073	25	74C50	28
7451N	45	74LS148	205	LM399Y	1.00	CD4074	25	74C51	28
7452N	45	74LS149	205	LM399Z	1.00	CD4075	25	74C52	28
7453N	45	74LS150	205	LM399AA	1.00	CD4076	25	74C53	28
7454N	45	74LS151	205	LM399AB	1.00	CD4077	25	74C54	28
7455N	45	74LS152	205	LM399AC	1.00	CD4078	25	74C55	28
7456N	45	74LS153	205	LM399AD	1.00	CD4079	25	74C56	28
7457N	45	74LS154	205	LM399AE	1.00	CD4080	25	74C57	28
7458N	45	74LS155	205	LM399AF	1.00	CD4081	25	74C58	28
7459N	45	74LS156	205	LM399AG	1.00	CD4082	25	74C59	28
7460N	45	74LS157	205	LM399AH	1.00	CD4083	25	74C60	28
7461N	45	74LS158	205	LM399AJ	1.00	CD4084	25	74C61	28
7462N	45	74LS159	205	LM399AK	1.00	CD4085	25	74C62	28
7463N	45	74LS160	205	LM399AL	1.00	CD4086	25	74C63	28
7464N	45	74LS161	205	LM399AM	1.00	CD4087	25	74C64	28
7465N	45	74LS162	205	LM399AN	1.00	CD4088	25	74C65	28
7466N	45	74LS163	205	LM399AO	1.00	CD4089	25	74C66	28
7467N	45	74LS164	205	LM399AP	1.00	CD4090	25	74C67	28
7468N	45	74LS165	205	LM399AQ	1.00	CD4091	25	74C68	28
7469N	45	74LS166	205	LM399AR	1.00	CD4092	25	74C69	28
7470N	45	74LS167	205	LM399AS	1.00	CD4093	25	74C70	28
7471N	45	74LS168	205	LM399AT	1.00	CD4094	25	74C71	28
7472N	45	74LS169	205	LM399AU	1.00	CD4095	25	74C72	28
7473N	45	74LS170	205	LM399AV	1.00	CD4096	25	74C73	28
7474N	45	74LS171	205	LM399AW	1.00	CD4097	25	74C74	28
7475N	45	74LS172	205	LM399AX	1.00	CD4098	25	74C75	28
7476N	45	74LS173	205	LM399AY	1.00	CD4099	25	74C76	28
7477N	45	74LS174	205	LM399AZ	1.00	CD4100	25	74C77	28
7478N	45	74LS175	205	LM399BA	1.00	CD4101	25	74C78	28
7479N	45	74LS176	205	LM399BB	1.00	CD4102	25	74C79	28
7480N	45	74LS177	205	LM399BC	1.00	CD4103	25	74C80	28
7481N	45	74LS178	205	LM399BD	1.00	CD4104	25	74C81	28
7482N	45	74LS179	205	LM399BE	1.00	CD4105	25	74C82	28
7483N	45	74LS180	205	LM399BF	1.00	CD4106	25	74C83	28
7484N	45	74LS181	205	LM399BG	1.00	CD4107	25	74C84	28
7485N	45	74LS182	205	LM399BH	1.00	CD4108	25	74C85	28
7486N	45	74LS183	205	LM399BJ	1.00	CD4109	25	74C86	28
7487N	45	74LS184	205	LM399BK	1.00	CD4110	25	74C87	28
7488N	45	74LS185	205	LM399BL	1.00	CD4111	25	74C88	28
7489N	45	74LS186	205	LM399BM	1.00	CD4112	25	74C89	28
7490N	45	74LS187	205	LM399BN	1.00	CD4113	25	74C90	28
7491N	45	74LS188	205	LM399BO	1.00	CD4114	25	74C91	28
7492N	45	74LS189	205	LM399BP	1.00	CD4115	25	74C92	28
7493N	45	74LS190	205	LM399BQ	1.00	CD4116	25	74C93	28
7494N	45	74LS191	205	LM399BR	1.00	CD4117	25	74C94	28
7495N	45	74LS192	205	LM399BS	1.00	CD4118	25	74C95	28
7496N	45	74LS193	205	LM399BT	1.00	CD4119	25	74C96	28
7497N	45	74LS194	205	LM399BU	1.00	CD4120	25	74C97	28
7498N	45	74LS195	205	LM399BV	1.00	CD4121	25	74C98	28
7499N	45	74LS196	205	LM399BW	1.00	CD4122	25	74C99	28
7500N	45	74LS197	205	LM399BX	1.00	CD4123	25	74C100	28

RESISTORS
 1/4 watt 5% 03 1000 per type 012
 25 per type 025 350 piece pack
 50 per type 015 5 per type 950

KEYBOARDS
 83 Key Keyboard \$18.95
 100 Key Keyboard \$24.95
 Has keyboard 9.95

IC Test Clips
 Red or Black 50 43
 Keyer \$043 14.50
 complete with case and Solar Cells \$4.95

IC SOCKETS
 Red 1018 15 Jumbo Red 20
 Green 1018 20 Jumbo Green 25
 Orange 1018 20 Jumbo Orange 25
 Yellow 1018 20 Jumbo Yellow 25
 Cylindrical LED Mounting Clips \$8.95
 (color by req. white, green, yellow, clear)

CRYSTALS
 1 MHz 4.50 2.000 MHz 3.50
 2 MHz 4.50 2.09152 MHz 7.75
 4 MHz 4.25 2.4276 MHz 7.50
 5 MHz 4.25 2.2768 MHz 7.50
 10 MHz 4.25 3.0688 MHz 4.50
 15 MHz 3.90 3.165 MHz 4.50
 30 MHz 3.90 3.143 MHz 4.50
 32 MHz 3.90 6.528 MHz 4.50
 32.768 KHz 4.00 18.432 MHz 4.50
 1.8432 MHz 7.50 22.1184 MHz 4.50
 1.5768 MHz 4.50

TRANSFORMERS
 12 volt 300 ma transformer 1.25
 12V 250 ma transformer 1.25
 12V 250 ma wall plug 2.95
 24V 250 ma wall plug 3.50

COMPUTER BOARD KITS
 8K RAM Board Kit 225.00
 16K EPROM Kit 133.50
 16K Board Kit 44.50
 2-chip Board w/increment 12.50
 Video Interface board kit 149.95
 10K Static RAM board kit 149.00
 16K EPROM board kit 85.00
 16K Static RAM board kit 149.00

TV GAME CHIPS
 MM5710 6 Games Chip 30.00
 MM5710 12 Games Chip 30.00
 LM1895 Modulator 1.75
 LM1895 Modulator 1.75
 LM1895 Modulator 1.75

Digital Thermometer \$65.00
 General purpose or medical 32-230°F.
 Disposable probe cover ±2° accuracy.
 Completely assembled w/compact case.

Not a Cheap Clock Kit \$17.45
 Includes everything except case. 2-PC boards. 6-50 LED Displays. 5314 clock chip, transformer, all components and full instructions. Same clock kit with 80' displays. \$22.75

Digital Temperature Meter Kit
 Indoor and outdoor. Automatically switches back and forth. Beautiful. 50' LED readouts. Nothing like it available. Needs no additional parts for complete, full operation. Will measure -100° to +200°F, air or liquid. Very accurate. Complete instructions. \$39.95

Variable Power Supply Kit
 0-12 VDC @1A, less than 1% line, load regulation. Remote sense capability. Constant voltage/circuit limit can be modified for other V/I ranges. Complete with board and transformers. \$24.00

1977 IC Update Master
 Manual Complete integrated circuit data selector from all manufacturers. 1,234 page master reference guide to the latest IC's including microprocessors and consumer circuits. 17,000 cross references for easier sourcing of hard to get parts. Special pricing: \$24.95, with free update service thru 1977. Domestic postage \$2.00. Foreign \$6.00.

TERMS: \$5.00 min. order U.S. Funds. Calif residents add 6% tax. BankAmericard and Master Charge accepted. Shipping charges will be added.

2.5 MHz Frequency Counter Kit
 As low as 10 Hz. 6-50' digits with PC board and full instructions. \$40.00

Function Module Card Kit
 Converts any frequency counter into 3 1/2 digit DVM, digital thermometer, pulse & square generator from 10 Hz to 100 kHz. Complete kit minus power supply. \$25.00

Volt/ohm Probe
 Batt. oper AC/DC to 125 V. 2 pos. volt and 2 neg. volt plus continuity. Stainless steel, pocket size, comp. assem. \$34.95

30 MHz Frequency Counter Kit
 Crystal time base. Covers audio, amateur and CB band. 6.5' digits, prescailable with PC board and full instructions. \$55.00 Fully wired and tested. \$75.00

Stopwatch Kit \$26.95

DON'T FORGET OUR DISCOUNTS WHEN COMPARING PRICES
PRICE BREAKTHROUGH ON 74LS'

74LS00	28	74LS30	28	74LS90	57	74LS157	75	74LS248	79
74LS01	28	74LS32	33	74LS92	57	74LS158	75	74LS249	79
74LS02	28	74LS33	33	74LS93	57	74LS159	75	74LS250	79
74LS03	28	74LS34	33	74LS94	57	74LS160	1.02	74LS251	75
74LS04	28	74LS35	33	74LS95	57	74LS161	1.02	74LS252	75
74LS05	28	74LS36	33	74LS96	57	74LS162	1.02	74LS253	75
74LS06	28	74LS37	33	74LS97	57	74LS163	1.02	74LS254	75
74LS07	28	74LS38	33	74LS98	57	74LS164	1.02	74LS255	75
74LS08	28	74LS39	33	74LS99	57	74LS165	1.14	74LS256	65
74LS09	28	74LS40	33	74LS100	57	74LS166	1.14	74LS257	65
74LS10	28	74LS41	33	74LS101	57	74LS167	1.14	74LS258	65
74LS11	28	74LS42	33	74LS102	57	74LS168	1.14	74LS259	65
74LS12	28	74LS43	33	74LS103	57	74LS169	1.14	74LS260	65
74LS13	28	74LS44	33	74LS104	57	74LS170	1.73	74LS261	67
74LS14	28	74LS45	33	74LS105	57	74LS171	1.73	74LS262	67
74LS15	28	74LS46	33	74LS106	57	74LS172	1.06	74LS263	67
74LS16	28	74LS47	33	74LS107	57	74LS173	1.06	74LS264	67
74LS17	28	74LS48	33	74LS108	57	74LS174	1.06	74LS265	67
74LS18	28	74LS49	33	74LS109	57	74LS175	1.06	74LS266	67
74LS19	28	74LS50	33	74LS110	57	74LS176	1.06	74LS267	67
74LS20	28	74LS51	33	74LS111	57	74LS177	1.06	74LS268	67
74LS21	28	74LS52	33	74LS112	57	74LS178	1.06	74LS269	67
74LS22	28	74LS53	33	74LS113	57	74LS179	1.06	74LS270	67
74LS23	28	74LS54	33	74LS114	57	74LS180	1.06	74LS271	67
74LS24	28	74LS55	33	74LS115	57	74LS181	1.06	74LS272	67
74LS25	28	74LS56	33	74LS116	57	74LS182	1.06	74LS273	67
74LS26	28	74LS57	33	74LS117	57	74LS183	1.06	74LS274	67
74LS27	28	74LS58	33	74LS118	57	74LS184	1.06	74LS275	67
74LS28	28	74LS59	33	74LS119	57	74LS185	1.06	74LS276	67
74LS29	28	74LS60	33	74LS120	57	74LS186	1.06	74LS277	67
74LS30	28	74LS61	33	74LS121	57	74LS187	1.06	74LS278	67
74LS31	28	74LS62	33	74LS122	57	74LS188	1.06	74LS279	67
74LS32	28	74LS63	33	74LS123	57	74LS189	1.06	74LS280	67
74LS33	28	74LS64	33	74LS124	57	74LS190	1.06	74LS281	67
74LS34	28	74LS65	33	74LS125	57	74LS191	1.06	74LS282	67
74LS35	28	74LS66	33	74LS126	57	74LS192	1.06	74LS283	67
74LS36	28	74LS67	33	74LS127	57	74LS193	1.06	74LS284	67
74LS37	28	74LS68	33	74LS128	57	74LS194	1.06	74LS285	67
74LS38	28	74LS69	33	74LS129	57	74LS195	1.06	74LS286	67
74LS39	28	74LS70	33	74LS130	57	74LS196	1.06	74LS287	67
74LS40	28	74LS71	33	74LS131	57	74LS197	1.06	74LS288	67
74LS41	28	74LS72	33	74LS132	57	74LS198	1.06	74LS289	67
74LS42	28	74LS73	33	74LS133	57	74LS199	1.06	74LS290	67
74LS43	28	74LS74	33	74LS134	57	74LS200	1.06	74LS291	67
74LS44	28	74LS75	33	74LS135	57	74LS201	1.06	74LS292	67
74LS45	28	74LS76	33	74LS136	57	74LS202	1.06	74LS293	67
74LS46	28	74LS77	33	74LS137	57	74LS203	1.06	74LS294	67
74LS47	28	74LS78	33	74LS138	57	74LS204	1.06	74LS295	67
74LS48	28	74LS79	33	74LS139	57	74LS205	1.06	74LS296	67
74LS49	28	74LS80	33	74LS140	57	74LS206	1.06	74LS297	67
74LS50	28	74LS81	33	74LS141	57	74LS207	1.06	74LS298	67
74LS51	28	74LS82	33	74LS142	57	74LS208	1.06	74LS299	67
74LS52	28	74LS83	33	74LS143	57	74LS209	1.06	74LS300	67
74LS53	28	74LS84	33	74LS144	57	74LS210	1.06	74LS301	67
74LS54	28	74LS85	33	74LS145	57	74LS211	1.06	74LS302	67
74LS55	28	74LS86	33	74LS146	57	74LS212	1.06	74LS303	67
74LS56	28	74LS87	33	74LS147	57	74LS213	1.06	74LS304	67
74LS57	28	74LS88	33	74LS148	57	74LS214	1.06	74LS305	67
74LS58	28	74LS89	33	74LS149	57	74LS215	1.06	74LS306	67
74LS59	28	74LS90	33	74LS150	57	74LS216	1.06	74LS307	67
74LS60	28	74LS91	33	74LS151	57	74LS217	1.06	74LS308	67
74LS61	28	74LS92	33	74LS152	57	74LS218	1.06	74LS309	67
74LS62	28	74LS93	33	74LS153	57	74LS219	1.06	74LS310	67
74LS63	28	74LS94	33	74LS154	57	74LS220	1.06	74LS311	67
74LS64	28	74LS95	33	74LS155	57	74LS221	1.06	74LS312	67
74LS65	28	74LS96	33	74LS156	57	74LS222	1.06	74LS313	67
74LS66	28	74LS97	33	74LS157	57	74LS223	1.06	74LS314	67
74LS67	28	74LS98	33	74LS158	57	74LS224	1.06	74LS315	67
74LS68	28	74LS99	33	74LS159	57	74LS225	1.06	74LS316	67
74LS69	28	74LS100	33	74LS160	57	74LS226	1.06	74LS317	67

INTEGRATED CIRCUITS — TTL, CMOS, LINEAR & MOS

7400	21	7467	32	74181	215	4012	23	4520	114
7401	21	7468	32	74182	215	4013	40	4521	118
7402	21	7469	32	74183	219	4014	40	4522	118
7403	21	7470	32	74184	219	4015	96	4523	88
7404	21	7471	32	74185	219	4016	40	4524	123
7405	21	7472	32	74186	30	4017	40	4525	123
7406	21	7473	32	74187	30	4018	105	4526	123
7407	21	7474	32	74188	30	4019	23	4527	123
7408	21	7475	32	74189	30	4020	114	4528	123
7409	21	7476	32	74190	30	4021	114	4529	123
7410	21	7477	32	74191	30	4022	96	4530	123
7411	21	7478	32	74192	30	4023	23	4531	123
7412	21	7479	32	74193	30	4024	84	4532	123
7413	21	7480	32	74194	30	4025	23	4533	123
7414	21	7481	32	74195	30	4026	168	4534	123
7415	21	7482	32	74196	30	4027	40	4535	123
7416	21	7483	32	74197	30	4028	89	4536	123
7417	21	7484	32	74198	30	4029	114	4537	123
7418	21	7485	32	74199	30	4030	23	4538	123
7419	21	7486	32	74200	30	4031	51	4539	123
7420	21	7487	32	74201	30	4032	114	4540	123
7421	21	7488	32	74202	30	4033	151	4541	123
7422	21	7489	32	74203	30	4034	350	4542	123
7423	21	7490	32	74204	30	4035	114	4543	123
7424	21	7491	32	74205	30	4036	114	4544	123
7425	21	7492	32	74206	30	4037	23	4545	123
7426	21	7493	32	74207	30	4038	23	4546	123
7427	21	7494	32	74208	30	4039	23	4547	123
7428	21	7495	32	74209	30	4040	114	4548	123
7429	21	7496	32	74210	30	4041	79	4549	123
7430	21	7497	32	74211	30	4042	79	4550	123
7431	21	7498	32	74212	30	4043	79	4551	123
7432	21	7499	32	74213	30	4044	70	4552	123
7433	21	7500	32	74214	30	4045	126	4553	123
7434	21	7501	32	74215	30	4046	186	4554	123
7435	21	7502	32	74216	30	4047	40	4555	123
7436	21	7503	32	74217	30	4048	40	4556	123
7437	21	7504	32	74218	30	4049	40	4557	123
7438	21	7505	32	74219	30	4050	23	4558	123
7439	21	7506	32	74220	30	4051	26	4559	123
7440	21	7507	32	74221	30	4052	126	4560	123
7441	21	7508	32	74222	30	4053	126	4561	123
7442	21	7509	32	74223	30	4054	126	4562	123
7443	21	7510	32	74224	30	4055	126	4563	123
7444	21	7511	32	74225	30	4056	126	4564	123
7445	21	7512	32	74226	30	4057	126	4565	123
7446	21	7513	32	74227	30	4058	126	4566	123
7447	21	7514	32	74228	30	4059	126	4567	123
7448	21	7515	32	74229	30	4060	126	4568	123
7449	21	7516	32	74230	30	4061	126	4569	123
7450	21	7517	32	74231	30	4062	126	4570	123
7451	21	7518	32	74232	30	4063	126	4571	123
7452	21	7519	32	74233	30	4064	126	4572	123
7453	21	7520	32	74234	30	4065	126	4573	123
7454	21	7521	32	74235	30	4066	126	4574	123
7455	21	7522	32	74236	30	4067	126	4575	123
7456	21	7523	32	74237	30	4068	126	4576	123
7457	21	7524	32	74238	30	4069	126	4577	123
7458	21	7525	32	74239	30	4070	126	4578	123
7459	21	7526	32	74240	30	4071	126	4579	123
7460	21	7527	32	74241	30	4072	126	4580	123
7461	21	7528	32	74242	30	4073	126	4581	123
7462	21	7529	32	74243	30	4074			

S.D. SALES CO. P.O. BOX 28810 - c DALLAS, TEXAS 75228

**Z-80 CPU KIT
For Imsai-Altair
\$149. kit**

Z-80 Chip & Manual \$49.95

From the same people who brought you the \$89.95 4K RAM Kit. We were not the first to introduce an Imsai/Altair compatible Z-80 card, but we do feel that ours has the best design and quality at the lowest price!
The advanced features of the Z-80 such as an expanded set of 158 instructions, 8080A software compatibility, and operation from a single 5VDC supply, are all well known. What makes our card different is the extra care we took in the hardware design. The CPU card will always stop on an M1 state. We also generate TRUE SYNC on card, to insure that the rest of your system functions properly. Dynamic memory refresh and NMI are brought out for your use. Believe it or not, not all of our competitors have gone to the extra trouble of doing this.
As always this kit includes all parts, all sockets, and complete instructions for ease of assembly. Because of our past experience with our 4K kit we suggest that you order early. All orders will be shipped on a strict first come basis. Dealers inquiries welcome on this item. Kit includes Zilog Manual and all parts. Kit shipped with 2 MHz crystals.
Z-80 MANUAL - \$7.50 SEPARATELY

**THE WHOLE
WORKS
\$89.95**

4K LOW POWER RAM BOARD KIT

Imsai and Altair 8080 plug in compatible. Uses low power static 21L02-1 500 ns. RAM'S. Fully buffered, drastically reduced power consumption, on board regulated, all sockets and parts included. Premium quality plated through PC Board.
For 250 ns RAM's add \$10.00

Music to your Ears!
**CAR/BOAT KIT
\$34.95**

**NEWEST KIT FROM S.D. SALES!
MUSICAL HORN**

**HOME KIT
\$19.95**

Musical Horn Kit for Car, Boat or Home
Plays any tune from Mozart to Led Zepplin
Change tunes in seconds
Complete Solid State electronics
Standard or custom tunes available at \$6.95 each
(you supply us with the sheet music - we supply electronics for your favorite tunes.)
One song supplied with original order

Standard Tunes Available:
DIXIE - EYES OF TEXAS - ON WISCONSIN -
YANKEE DOODLE DANDY - NOTRE DAME
FIGHT SONG - PINK PANTHER - AGGIE WAR
SONG - ANCHORS AWAY - NEVER ON SUNDAY
BRIDGE OVER RIVER QUI - CANDY MAN

Home Kit includes speaker which operates from your door bell. When door bell is pushed your favorite tune is played. Car/Boat Kit DOES NOT include speaker. Uses standard 8ohm PM speaker. Allow 4 weeks delivery on both kits.

Limited Quantity!
\$9.95 kit

SIX DIGIT ALARM CLOCK KIT

We made a fantastic kit even better. Redesigned to take advantage of the latest advances in I.C. clock technology. Features: Litronix Dual 1/2" displays. Mostek 50250 super clock chip, single I.C. segment driver, SCR digit drivers. Greatly simplified construction. More reliable and easier to build. Kit includes all necessary parts (except case). For P.C. Board add \$3.00; AC XFMR add \$1.50. Do not confuse with Non-Alarm kits sold by our competition!
NEW! WITH JUMBO LED READOUTS!

1000 MFD Filter Caps. Rated 35 WVDC. Upright style with PC leads. Most popular value for hobbyists. 4/\$1.00	SLIDE SWITCH Assortment. Our best seller. Includes miniature and standard sizes, single and multi-position units. All new. 12/\$1.00	POWER RESISTOR 15 OHM 25W BY CLAROSTAT 75¢ ea.	RESISTOR ASSORTMENT 1/4W 5% & 10% PC leads. A good mix of values! Special! 200/\$2.	P.C. LEAD DIODES 1N4148/1N914 100/\$2.00 1N4002 - 1A 100 PIV 40/\$1.	Just received a good mixed lot of National TO-92 plastic transistors. PNP & NPN, even a few FET's. 40-50% yield. Untested Asst. 500/\$3.	DISC CAP ASSORTMENT P.C. Leads. At least 10 different values. Includes .001, .01, .05 plus other standard values. 60/\$1.00
---	---	---	--	---	---	--

AMD-1702A

Huge Factory Purchase

FACTORY PRIME UNITS! BRAND NEW!
1.5 Micro-Seconds Access Time.

10/\$40. \$4.95 ea.

IC's from XEROX

7400 - 9c	7430 - 9c	7493 - 26c	1402 A Shift Regulator - 50c
7402 - 9c	7440 - 9c	74121 - 22c	MH0025CN - 55c
7404 - 9c	7437 - 10c	74123 - 32c	
7406 - 11c	7438 - 10c	74151 - 9c	IC'S REMOVED FROM
7407 - 11c	7451 - 9c	74155 - 22c	PC BOARDS
7410 - 9c	7474 - 16c	74193 - 35c	ALL TESTED;
7416 - 13c	7475 - 24c	8233 - 35c	FULL SPEC.
7420 - 9c	7486 - 16c	Intel - 1302 - 45c	

**UP YOUR COMPUTER!
21L02-1**

And so is power! Not only are our RAM'S faster than a speeding bullet but they are now very low power. We are pleased to offer prime new 21L02-1 Low Power and Super Fast RAM's. Allows you to STRETCH your power supply farther and at the same time keep the wait light off!

500 ns 8/\$12.95
250 ns 8/\$15.95

\$12.95 S.D. Sales Exclusive! \$12.95

MOS 6 DIGIT UP/DOWN COUNTER

40 PIN DIP. Everything you ever wanted in a counter chip. Features: Direct LED sement drive, single power supply (12 VDC TYPE.), six decades up/down, pre-loadable counter, separate pre-loadable compare register with compare out-put, BCD and seven segment outputs, internal scan oscillator, CMOS compatible, leading zero blanking. 1MHZ. count input frequency.
VERY LIMITED QUANTITY!

Special!

3.579545 MHz Time Base Crystal \$1.25

28 PIN IC Sockets 3/\$1.00

11,000 MFD 50WVDC Computer Grade Cap. \$3.00

39 MFD 16V Mallory Electrolytic 15/\$1.00

TERMS:

MONEY BACK GUARANTEE!

No COD's. Texas Residents add 5% Sales Tax. Add 5% of order for postage & handling. Orders under \$10. add 75c. Foreign orders: U.S. Funds Only!

Call in your BANKAMERICARD or MASTER CHARGE order in on our Continental United States Toll Free Watts Line:

1-800-527-3460

Texas Residents Call Collect:

214/271-0022

Cheap DC Supply

Actually an AC adaptor for calculators. 9VDC no load, 6VDC @ 200ma. 4VDC @ 375ma.

\$2. ea.

S. D. SALES CO.
P.O. BOX 28810 - C
DALLAS, TEXAS 75228

Orders over \$15. - Choose \$1. FREE MERCHANDISE!

CIRCLE 72 ON FREE INFORMATION CARD

WIREWRAP



Cut & Stripped #30 Kynar Wire In Red, Yellow, Blue, White, Green or Orange. All lengths overall. 1" strip on each end.

Gold Wire Wrap IC Sockets High Quality Closed Entry Type

3"	100	500	1000
3 1/2"	82	260	471
4"	86	281	512
4 1/2"	94	321	583
5"	98	342	634
5 1/2"	102	363	675
6"	106	383	716
6 1/2"	110	404	757
7"	114	424	798
7 1/2"	118	445	839
8"	123	465	880
8 1/2"	127	485	921
9"	131	505	962

Adv. inches 10 41 82
On 250 ft. Rolls \$4.00 10 \$30 (max)

1.9	10-24	25-99	100-199
8	44	40	36
14	38	37	365
18	42	41	38
22	46	45	80
26	50	49	80
30	54	53	80
34	58	57	80
38	62	61	80
42	66	65	80
46	70	69	80
50	74	73	80
54	78	77	80
58	82	81	80
62	86	85	80
66	90	89	80
70	94	93	80
74	98	97	80
78	102	101	80
82	106	105	80
86	110	109	80
90	114	113	80
94	118	117	80
98	122	121	80

We also Stock:
• Wire Wrap Boards
• 7400 & 74LS00 IC's
• Processor Support Chips
Call or Write for catalog
(213) 797-4002 or 797-4007

HOBBY WRAP TOOL




\$34.95

With Free Wire

250	2 1/2"
250	3"
250	3 1/2"
100	4"
100	4 1/2"
100	5"
100	6"

Hand Wrap UnWrap Strip Tool
\$5.95 with \$2 free wire



Page Digital Electronics
1701 East Orange Grove Blvd
Pasadena, California 91104

CIRCLE 22 ON FREE INFORMATION CARD


New IC's

TI SCR array

IC transistor arrays give us experimenters the illusion of being custom integrated-circuit designers. The packages make neat final circuits and the average cost per device is on a par with discretes.

TI's TCP2410 has eight SCR's arranged in two groups of four. Each group has their cathodes tied together and brought out on a single pin. Gates and anodes are brought out to separate pins, accounting for all 18 terminals on the DIP package. Eight holding-current resistors are on the chip to keep the external component count down.

The new SCR array is designed for use as display latches, analog switches or crosspoint switches. In the last application, crosstalk must be a minimum. Crosstalk is down more

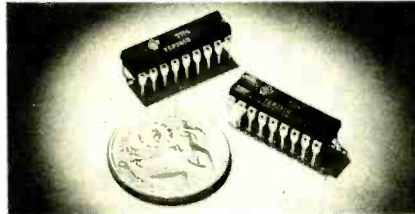

TI TCP2410-TCP2411 SCR ARRAY.

than 90 dB at 1 kHz with 600-ohm sources and loads.

Voltage ratings are 50-volts absolute maximum and 20-volts operating. The

holding current is guaranteed under 100 mA and is typically 350 µA.

In 100 to 999 quantities the price for both devices is \$2.95 each. Texas Instruments Incorporated, Box 5012, Mail Station 308, Dallas, TX 75222.

Ultra-stable oscillator

Plessey Semiconductors' SL680A Crystal Oscillator Maintaining Circuit does not significantly affect the frequency stability of an external crystal.



THE SL680A CRYSTAL OSCILLATOR maintaining circuit, by Plessey

The bipolar IC oscillator works at fundamental or overtone frequencies between 100 kHz and 150 MHz. Sinewave voltage or current outputs have distortion products down more than 40 dB. Internal AGC maintains constant output level and limits crystal drive to about 0.1 µW.

Plessey Semiconductors, 1674 McGaw Avenue, Santa Ana, CA 92705. R-E

UNIVERSAL 4K x 8 MEMORY BOARD KIT
\$74.50
32-2102-1 fully buffered, 16 address lines, on board decoding for any 4 of 64 pages, standard 44 pin buss.

EXPANDABLE F8 CPU BOARD KIT
\$99.00
featuring Fairbug PSU, 1K of static ram, RS 232 interface, documentation, 64 BYTE register CD4026 - \$1.25 CD4046 - \$2.20

4K BASIC FOR FAIRBUG F8
on paper tape \$25.00

NEW COMPUTER INTERFACE BOARD KIT
Kit allows you to interface serial TTL to RS 232 and RS 232 to TTL. Four of these are supplied with kit, you can run up to four devices on one TTL or four separate TTL to RS 232 devices. Typical use: you can use your computer ports to run an RS 232 printer, video terminal and two other RS 232 devices at once, without constantly connecting and disconnecting your terminals. Example: out store to printer-voltage requirement +5V and +5V or +12V depending on your RS 232 device. We supply - board, connectors, documentation and components. Sorry, we do not supply case or power supply. \$49.00

#24, EIGHT CONDUCTOR SPECTRA FLAT CABLE
8 PIN - 22 24 PIN - 40
14 PIN - 25 28 PIN - 50
16 PIN - 28 40 PIN - 60
18 PIN - 30
100/\$13.50

#30 WIRE WRAP WIRE
SINGLE STRAND 100'/\$1.40

2708-8K EPROM	\$24.95
2522 STATIC SHIFT REG	\$ 1.95
2513 CHARACTER GEN	\$ 9.95
2518 HEX 32 BIT SR	\$ 3.50
2102 1024 BT RAM	\$ 1.29
5280 4K DYNAMIC RAM	\$ 4.75
MM5202A UV PROM	\$ 6.95
MM5203 UV PROM	\$ 6.95
1702A UV PROM	\$ 4.95
5204 4K PROM	\$10.95
AY-5-1013 UART	\$ 6.95

LED READOUTS
FND 359 C.C. 4" \$ 50 HP 7740-3" C.C. \$1.25
FND 70 C.C. 4" \$ 55 MAN-7.3" C.A. \$ 9.95
FND 503 C.C. 5" \$ 85 NS 33-3 dig. array \$ 7.75
FND 510 C.A. 5" \$ 85 DL 747 C.A. 6" \$13.95

LIGHT ACTIVATED SCR'S
TO 18, 200V 1A \$ 1.75
100 4148 (IND 14) 15/\$1.00
MCA-81 OPTICAL LIMIT SWITCH \$1.50

PRINTED CIRCUIT BOARD
4 1/2" x 6 1/2" SINGLE SIDED EPOXY BOARD 1 16" thick, unetched \$6.00 ea. \$5/\$2.60

7 WATT LD-65 LASER DIODE IR \$8.95
2N 3820 P FET \$ 45
2N 5457 N FET \$ 45
2N2646 \$ 45
ER 900 TRIGGER DIODES 4 \$1.00
2N 6028 PROG UJT \$ 65

MINIATURE MULTI-TURN TRIM POTS
100, 500, 1K, 2K, 5K, 10K, 25K, 50K, 100K, 200K, 500K 1 Meg. \$75 each. 3/\$2.00

VERIPAX PC BOARD
This board is a 1 1/8" single sided paper epoxy board, 4 1/2" x 6 1/2" DRILLED and ETCHED which will hold up to 21 single 14 pin IC's or 8, 16, or LSI DIP IC's with busses for power supply connector. \$4.00

MOV 5691 YELLOW-GREEN \$ 90
RED, YELLOW, GREEN or AMBER \$ 50
FP 100 PHOTO TRANS \$ 50
BIPOLAR LED \$ 90
LARGE LED'S 6/\$1.00
11.5 (MCT-2) \$ 75
MOLEX PINS 100/\$1.00
1000/\$8.00

10 WATT ZENERS 3.9, 4.7, 5.6, 8.2, 12.15, 18, 22, 100, 150 or 200V ea. \$ 60
1 WATT ZENERS 4.7, 5.6, 10, 12, 15, 18 or 22V ea. \$ 25
MC6860 MODEM CHIP \$9.95

SILICON Power Rectifiers
PRV 1A 3A 12A 50A 125A
100 06 14 30 80 3 70
200 07 20 35 1 15 4 25
400 09 25 50 1 40 6 50
600 11 30 70 1 80 8 50
800 15 35 90 2 30 10 50
1000 20 45 110 2 75 12 50

SILICON SOLAR CELLS
2 1/4" diameter
4V at 500 ma. \$4.00 / 2V at 200 mills \$2.00

REGULATORS
309K \$.95 340K-5, 12, 15, \$.85
723 \$.50 or 24V \$.85
LM 376 \$.60 340T-5, 6, 8, 12
320K-5 or 15V \$1.40 15, 18 or 24V \$1.10
320T-5, 12, 15 78 MG \$1.35
or 24V \$.85 79 MG \$1.35

RS232 CONNECTORS
DB 25P male \$3.25
DB 25S female \$3.95

TRANSISTOR SPECIALS
2N3585 NPN Si TO 66 \$ 95
2N3772 NPN Si TO 3 \$ 1.60
2N456A PNP CE \$ 75
2N4908 PNP Si TO 3 Darlingtion \$ 1.00
2N6056 NPN Si TO 3 \$ 1.70
2N5086 PNP Si TO 92 4/S 1.00
2N4898 PNP TO 66 \$.60
2N404 PNP GE TO 5 5/S 1.00
2N3919 NPN Si TO 3 RF \$ 1.50
MPSA 13 NPN Si TO 92 3/S 1.00
2N3767 NPN Si TO 66 \$.70
2N2222 NPN Si TO 18 5/S 1.00
2N3055 NPN Si TO 3 5/S 1.00
2N3904 NPN Si TO 92 5/S 1.00
2N3906 PNP Si TO 92 5/S 1.00
2N5296 NPN Si TO 220 \$.50
2N6109 PNP Si TO 220 \$.55
2N3638 PNP Si TO 5 5/S 1.00
2N651 NPN TO 92 Si 3/S 1.00

TTL IC SERIES
7400 - 14 7445 - 15 74150 - 90
7401 - 14 7446 - 65 74151 - 60
7402 - 14 7447 - 65 74152 - 60
7403 - 14 7448 - 65 74154 - 95
7404 - 18 7450 - 15 74155 - 70
7405 - 18 7472 - 29 74157 - 58
7406 - 25 7473 - 29 74161 - 85
7407 - 25 7474 - 29 74163 - 80
7408 - 18 7475 - 45 74164 - 95
7409 - 17 7476 - 30 74165 - 95
7410 - 14 7480 - 35 74173 - 120
7411 - 20 7483 - 62 74174 - 95
7412 - 20 7485 - 87 74175 - 82
7413 - 39 7486 - 30 74176 - 75
7414 - 63 7489 - 185 74177 - 75
7415 - 25 7490 - 42 74180 - 65
7417 - 25 7491 - 58 74181 - 1.90
7420 - 14 7492 - 43 74190 - 1.00
7425 - 25 7493 - 45 74191 - 1.00
7426 - 22 7494 - 70 74192 - 83
7427 - 25 7495 - 65 74193 - 83
7430 - 14 7496 - 65 74194 - 85
7432 - 25 74107 - 28 74195 - 52
7437 - 21 74121 - 33 74257 - 1.25
7438 - 21 74123 - 65 74279 - 87
7440 - 14 74125 - 40 75324 - 1.75
7441 - 70 74126 - 40 75491 - 65
7442 - 40 74132 - 67 75492 - 65

MINIATURE DIP SWITCHES
CTS-206 Eight SPST switches in one minidip package \$1.75
CTS-206 B Eight SPST switches in a 16 pin DIP package \$1.95
5.8V SPST Miniature reed relay, normally open, 330 Ohm coil resistance \$.75, 3/\$2.00

ALCO MINIATURE TOGGLE SWITCHES
MTA 106 SPD T \$1.20
MTA 206 DPDT \$1.70

Full Wave Bridges

PRV	2A	6A	25A
200	75	1.25	2.00
400	95	1.50	3.00
600	1.20	1.75	4.00

SANKEN AUDIO POWER AMPS
Si 1010 G 10 WATTS \$ 7.95
Si 1020 G 20 WATTS \$15.95
Si 1050 G 50 WATTS \$27.95

TANTALUM CAPACITORS

22UF 35V 5/S \$1.00	6.8UF 35V 3/S \$1.00
47UF 35V 5/S \$1.00	22UF 35V 5/S \$.40
68UF 35V 5/S \$1.00	30UF 6V 5/\$1.00
1UF 35V 5/S \$1.00	33UF 35V \$.40
2.20UF 20V5/S \$1.00	47UF 20V \$.35
3.3UF 35V 4/S \$1.00	68 UF 15V \$.50
4.7UF 15V 5/S \$1.00	10UF 25V \$.25

M/001 ALARM CLOCK CHIP \$5.75

74LS SERIES	74LS SERIES	LINEAR CIRCUITS
74LS100 - 23	74LS153 - 93	LM 308 - 95
74LS102 - 23	74LS155 - 140	LM 311 - 95
74LS104 - 28	74LS157 - 98	LM 318 - 35
74LS108 - 23	74LS160 - 102	LM 319 - 95
74LS101 - 23	74LS161 - 102	LM 324 - 05
74LS111 - 23	74LS162 - 102	LM 339 - 10
74LS113 - 50	74LS163 - 102	LM 370 - 115
74LS120 - 23	74LS168 - 1.10	LM 377 - 2.50
74LS121 - 23	74LS169 - 1.10	LM 380 - 95
74LS122 - 23	74LS173 - 1.39	LM 381 - 1.25
74LS127 - 27	74LS174 - 1.05	LM 382 - 1.25
74LS132 - 33	74LS175 - 1.22	LM 537 - 2.50
74LS130 - 33	74LS190 - 1.50	LM 553 - 2.50
74LS132 - 33	74LS191 - 1.50	LM 555 - 44
74LS137 - 37	74LS192 - 1.75	LM 556 - 85
74LS138 - 49	74LS193 - 1.75	566 - 2.00
74LS190 - 95	74LS196 - 1.95	567 - 1.50
74LS142 - 88	74LS197 - 99	566 - 1.50
74LS73 - 40	74LS199 - 99	566 - 1.50
74LS74 - 40	74LS257 - 1.35	567 - 1.50
74LS76 - 40	74LS258 - 1.38	1031 - 90
74LS90 - 80	74LS266 - 38	709 - 25
74LS92 - 85	74LS365 - 66	710 - 35
74LS93 - 85	74LS366 - 66	711 - 35
74LS109 - 50	74LS367 - 66	711 - 35
74LS112 - 43	74LS368 - 66	711 - 35
74LS113 - 43	74LS369 - 66	711 - 35
74LS114 - 43	74LS390 - 2.20	LM 1310 - 2.50
74LS132 - 80	CIRCUITS	CA 3046 - 75
74LS138 - 72	LM 101	CA 3047 - 95
74LS139 - 72	LM 301	3900 - 49
74LS145 - 1.15	LM 301/749	1458
74LS151 - 98	LM 307	8038CC - 3.90

TRIACS
PRV 1A 10A 25A 1.5A 6A 35A
100 40 70 1.30 40 50 1.20
200 70 1.0 1.75 60 70 1.60
400 110 1.60 2.60 100 1.20 2.20
600 1.70 2.40 3.60 1.50 3.00

Terms: FOB Cambridge, Mass. Send 25¢ for our catalog featuring Transistors and Rectifiers. Includes Postage, Minimum Order \$5.00, COD's \$20.00. 145 Hampshire St., Cambridge, Mass.

SOLID STATE SALES
P.O. BOX 74D
SOMERVILLE, MASS. 02143 TEL. (617) 547-4005

WE SHIP OVER 95% OF OUR ORDERS THE DAY WE RECEIVE THEM

FREQUENCY COUNTER


TAKE ADVANTAGE OF THIS NEW STATE-OF-THE-ART COUNTER FEATURING THE MANY BENEFITS OF CUSTOM LSI CIRCUITRY. THIS NEW TECHNOLOGY APPROACH TO INSTRUMENTATION YIELDS ENHANCED PERFORMANCE, SMALLER PHYSICAL SIZE, DRASTICALLY REDUCED POWER CONSUMPTION [PORTABLE BATTERY OPERATION IS NOW PRACTICAL], DEPENDABILITY, EASY ASSEMBLY AND REVOLUTIONARY LOWER PRICING!

SIZE:
3" High
6" Wide
5 1/2" Deep

1 3/4 LBS.
COLOR:
BLACK



.4" DIGITS!

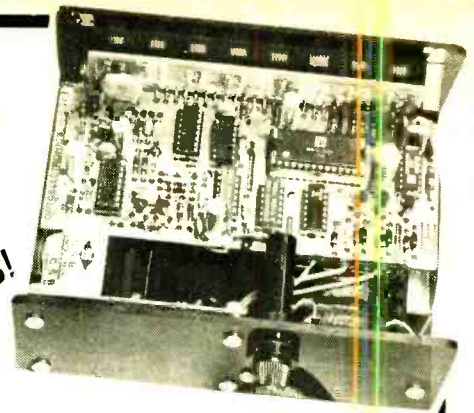

FEATURES AND SPECIFICATIONS:

DISPLAY: 8 RED LED DIGITS .4" CHARACTER HEIGHT
GATE TIMES: 1 SECOND AND 1/10 SECOND [AUTO DEC. PT. PLACEMENT]
RESOLUTION: 1 HZ AT 1 SECOND, 10 HZ AT 1/10 SECOND
FREQUENCY RANGE: 10 HZ TO 60 MHZ [65 MHZ TYPICAL]
SENSITIVITY: 10 MV RMS TO 50 MHZ, 20 MV RMS TO 60 MHZ TYP.
INPUT IMPEDANCE: 1 MEGOHM AND 20 PF
[DIODE PROTECTED INPUT FOR OVER VOLTAGE PROTECTION]
ACCURACY: ± 1 PPM [± .0001%] AFTER CALIBRATION TYPICAL
STABILITY: WITHIN 1 PPM PER HOUR AFTER WARM UP [0.001% TYPICAL]
IC PACKAGE COUNT: 8 [ALL SOCKETED]
INTERNAL POWER SUPPLY: 5.2 V DC AT 800 MA REGULATED
INPUT POWER REQUIRED: 8-12 VDC OR 115 VAC AT 50/60 HZ
POWER CONSUMPTION: 4 WATTS
INPUT CONNECTOR: BNC TYPE

FACTORY DIRECT PRICES

KIT #FC-50C	60 MHZ COUNTER WITH CABINET & P.S.	\$99.85
KIT #PSL-350	350 MHZ PRESCALER [NOT SHOWN]	23.95
KIT #PSL-650	650 MHZ PRESCALER [NOT SHOWN]	29.95
MODEL #FC-50WT	60 MHZ COUNTER WIRED, TESTED & CAL.	165.95
MODEL #FC-50/600WT	600 MHZ COUNTER WIRED, TESTED & CAL.	199.95

KIT #FC-50C IS COMPLETE WITH PREDRILLED CHASSIS ALL HARDWARE AND STEP-BY-STEP INSTRUCTIONS. WIRED & TESTED UNITS ARE CALIBRATED AND GUARANTEED. PRESCALERS WILL FIT INSIDE COUNTER CABINET.

PLEXIGLAS CABINETS

Great for Clocks or any LED Digital project. Clear-Red Chassis serves as Bezel to increase contrast of digital displays.

CABINET I
3"H, 6"W, 5 1/2"D Black, White or Clear Cover

CABINET II
2 1/2"H, 5"W, 4"D \$6.50 ea

RED OR GREY PLEXIGLAS FOR DIGITAL BEZELS
3"x6"x1/8" 95¢ ea 4/13

SEE THE WORKS Clock Kit


Clear Plexiglas Stand

- 6 Big 4" digits
- 12 or 24 hr time
- 3 set switches
- Plug transformer
- All parts included

Plexiglas is Pre-cut & drilled
Kit #850-4CP

Size: 6"H, 4 1/2"W, 3"D

***\$23.50 ea 2/45.**



A SUPER CLOCK!

60 HZ.

XTAL TIME BASE: Will enable Digital Clock Kits or Clock-Calendar Kits to operate from 12V DC, 1" x 2" PC Board, Power Req. 5-15V (2.5 MA TYP.) Easy 3 wire hookup Accuracy ± 2PPM
#TB-1 (Adjustable) Complete Kit \$4.95
Wir & Cal \$9.95

SPECIAL PRICING!

PRIME - HIGH SPEED RAM

21L02-3 400 NS

LOW POWER - FACTORY FRESH

1-24 \$1.95 ea 100-199 \$1.60 ea
25-99 1.75 ea 200-499 1.45 ea

OVER 500 PCS. **\$1.39 ea.**

6-DIGIT LED CLOCK CALENDAR KIT

DATE-TIME-SNOOZE ALARM & MORE... KIT 7001

FOR THE BUILDER THAT WANTS THE BEST. FEATURING 12 OR 24 HOUR TIME - 29-30-31 DAY CALENDAR. ALARM, SNOOZE AND AUX TIMER CIRCUITS

Will alternate time (8 seconds) and date (2 seconds) or may be wired for time or date display only, with other functions on demand. Has built-in oscillator for battery back-up. A loud 24 hour alarm with a repeatable 10 minute snooze alarm, alarm set & timer set indicators. Includes 110 VAC/60Hz power pack with cord and top quality components through-out.

KIT 7001B WITH 6 .5" DIGITS	\$39.95
KIT 7001C WITH 4 .6" DIGITS & 2 .3" DIGITS FOR SECONDS	\$42.95
KIT 7001X WITH 6 .6" DIGITS	\$45.95



KITS ARE COMPLETE (LESS CABINET)

ALL 7001 KITS FIT CABINET I AND ACCEPT QUARTZ CRYSTAL TIME BASE KIT #TB-1

PRINTED CIRCUIT BOARDS for CT 7001 Kits sold separately with assembly info. PC Boards are drilled Fiberglass, solder plated and screened with component layout.

Specify for 7001

B, Cor X - \$7.95

AUTO BURGLAR ALARM KIT

AN EASY TO ASSEMBLE AND EASY TO INSTALL ALARM PROVIDING MANY FEATURES NOT NORMALLY FOUND. KEYLESS ALARM HAS PROVISION FOR POS & GROUNDING SWITCHES OR SENSORS WILL PULSE HORN RELAY AT 1/2 RATE OR DRIVE SIREN. KIT PROVIDES PROGRAMMABLE TIME DELAYS FOR EXIT, ENTRY & ALARM PERIOD. UNIT MOUNTS UNDER DASH. REMOTE SWITCH CAN BE MOUNTED WHERE DESIRED. CMOS RELIABILITY RESISTS FALSE ALARMS, & PROVIDES FOR ULTRA DEPENDABLE ALARM. NOT BE FOOLED BY LOW PRICES! THIS IS A TOP QUALITY COMPLETE KIT WITH ALL PARTS INCLUDING DETAILED DRAWINGS AND INSTRUCTIONS OR AVAILABLE WIRED AND TESTED.



KIT #ALR-1 \$9.95

#ALR-1WT WIRED & TESTED \$19.95

VARIABLE REGULATED 1 AMP POWER SUPPLY KIT

- VARIABLE FROM 4 TO 14V
- SHORT CIRCUIT PROOF
- 723 IC REGULATOR
- 2N3055 PASS TRANSISTOR
- CURRENT LIMITING AT 1 Amp
- KIT IS COMPLETE INCLUDING DRILLED & SOLDER PLATED FIBERGLASS PC BOARD AND ALL PARTS (LESS TRANS. FORMER) KIT #PS-01 \$8.95
- TRANSFORMER 24V CT will provide 300MA at 12V and 1 Amp at 5V. \$3.50

MOBILE LED CLOCK

12/24 HR .4" DIGITS!

MODEL 12 VOLT AC or #2001 DC POWERED



- 6 JUMBO .4" RED LED'S BEHIND RED FILTER LENS WITH CHROME RIM
 - SET TIME FROM FRONT VIA HIDDEN SWITCHES - 12/24-Hr. TIME FORMAT
 - STYLISH CHARCOAL GRAY CASE OF MOLDED HIGH TEMP. PLASTIC
 - BRIDGE POWER INPUT CIRCUITRY - TWO WIRE NO POLARITY HOOK-UP
 - OPTIONAL CONNECTION TO BLANK DISPLAY (Use When Key Off in Car. FIC)
 - TOP QUALITY PC BOARDS & COMPONENTS - INSTRUCTIONS.
 - MOUNTING BRACKET INCLUDED
- KIT #2001 COMPLETE KIT \$29.95 3 OR MORE \$27.95 115 VAC Power Pack #AC-1 \$2.50 [Less 9V. Battery]
- ASSEMBLED UNITS WIRED & TESTED ORDER #2001 WT [LESS 9V. BATTERY] Wired for 12-Hr. Op. if not otherwise specified. \$39.95 3 OR MORE \$37.95 EA MORE

OPTOELECTRONICS, INC.

BOX 219 • HOLLYWOOD, FLA. 33022 • (305) 921-2056
STORE: 823 S. 21 AVE

WE PAY ALL SHIPPING IN CONTINENTAL USA - OTHERS ADD 5% [10% FOR AIRMAIL]

master charge



ORDER BY PHONE OR MAIL
COD ORDERS WELCOME

Orders Under \$15 Add \$1.00 Handling
Fla. Res. Please Add 4% Sales Tax.

CIRCLE 37 ON FREE INFORMATION CARD

7400N TTL

SN7400N	16	SN7459A	25	SN74154N	100
SN7401N	16	SN7460N	22	SN74155N	99
SN7402N	21	SN7470N	45	SN74156N	99
SN7403N	16	SN7472N	37	SN74157N	99
SN7404N	16	SN7473N	39	SN74158N	99
SN7405A	24	SN7474N	32	SN74159N	99
SN7406N	20	SN7475N	50	SN74160N	99
SN7407N	29	SN7476N	32	SN74161N	110
SN7408N	25	SN7477N	50	SN74162N	110
SN7409N	25	SN7478N	50	SN74163N	110
SN7410N	25	SN7479N	50	SN74164N	110
SN7411N	30	SN7480N	50	SN74165N	110
SN7412N	33	SN7481N	98	SN74166N	125
SN7413N	45	SN7482N	70	SN74167N	125
SN7414N	20	SN7483N	89	SN74168N	125
SN7415N	35	SN7484N	89	SN74169N	125
SN7416N	35	SN7485N	89	SN74170N	210
SN7417N	35	SN7486N	39	SN74171N	90
SN7418N	35	SN7487N	39	SN74172N	90
SN7419N	35	SN7488N	39	SN74173N	90
SN7420N	21	SN7489N	35	SN74174N	90
SN7421N	33	SN7490N	45	SN74175N	90
SN7422N	49	SN7491N	75	SN74176N	90
SN7423N	37	SN7492N	49	SN74177N	90
SN7424N	29	SN7493N	49	SN74178N	90
SN7425N	29	SN7494N	79	SN74179N	90
SN7426N	29	SN7495N	89	SN74180N	195
SN7427N	37	SN7496N	89	SN74181N	195
SN7428N	37	SN7497N	400	SN74182N	220
SN7429N	37	SN7498N	400	SN74183N	220
SN7430N	26	SN7499N	100	SN74184N	220
SN7431N	31	SN7500N	39	SN74185N	220
SN7432N	27	SN74101N	39	SN74186N	220
SN7433N	27	SN74102N	39	SN74187N	220
SN7434N	27	SN74103N	39	SN74188N	220
SN7435N	27	SN74104N	39	SN74189N	220
SN7436N	27	SN74105N	39	SN74190N	220
SN7437N	27	SN74106N	39	SN74191N	220
SN7438N	27	SN74107N	39	SN74192N	220
SN7439N	27	SN74108N	39	SN74193N	220
SN7440N	15	SN74109N	60	SN74194N	125
SN7441N	59	SN74110N	60	SN74195N	125
SN7442N	59	SN74111N	60	SN74196N	125
SN7443N	59	SN74112N	60	SN74197N	125
SN7444N	59	SN74113N	60	SN74198N	125
SN7445N	75	SN74114N	400	SN74199N	125
SN7446N	61	SN74115N	150	SN74200N	559
SN7447N	61	SN74116N	150	SN74201N	559
SN7448N	61	SN74117N	150	SN74202N	559
SN7449N	61	SN74118N	150	SN74203N	559
SN7450N	26	SN74119N	200	SN74204N	559
SN7451N	27	SN74120N	200	SN74205N	559
SN7452N	27	SN74121N	200	SN74206N	559
SN7453N	27	SN74122N	200	SN74207N	559
SN7454N	27	SN74123N	200	SN74208N	559
SN7455N	27	SN74124N	200	SN74209N	559
SN7456N	27	SN74125N	200	SN74210N	559
SN7457N	27	SN74126N	200	SN74211N	559
SN7458N	27	SN74127N	200	SN74212N	559
SN7459N	27	SN74128N	200	SN74213N	559
SN7460N	27	SN74129N	200	SN74214N	559
SN7461N	27	SN74130N	200	SN74215N	559
SN7462N	27	SN74131N	200	SN74216N	559
SN7463N	27	SN74132N	200	SN74217N	559
SN7464N	27	SN74133N	200	SN74218N	559
SN7465N	27	SN74134N	200	SN74219N	559
SN7466N	27	SN74135N	200	SN74220N	559
SN7467N	27	SN74136N	200	SN74221N	559
SN7468N	27	SN74137N	200	SN74222N	559
SN7469N	27	SN74138N	200	SN74223N	559
SN7470N	27	SN74139N	200	SN74224N	559
SN7471N	27	SN74140N	200	SN74225N	559
SN7472N	27	SN74141N	200	SN74226N	559
SN7473N	27	SN74142N	200	SN74227N	559
SN7474N	27	SN74143N	200	SN74228N	559
SN7475N	27	SN74144N	200	SN74229N	559
SN7476N	27	SN74145N	200	SN74230N	559
SN7477N	27	SN74146N	200	SN74231N	559
SN7478N	27	SN74147N	200	SN74232N	559
SN7479N	27	SN74148N	200	SN74233N	559
SN7480N	27	SN74149N	200	SN74234N	559
SN7481N	27	SN74150N	200	SN74235N	559
SN7482N	27	SN74151N	200	SN74236N	559
SN7483N	27	SN74152N	200	SN74237N	559
SN7484N	27	SN74153N	200	SN74238N	559
SN7485N	27	SN74154N	200	SN74239N	559
SN7486N	27	SN74155N	200	SN74240N	559
SN7487N	27	SN74156N	200	SN74241N	559
SN7488N	27	SN74157N	200	SN74242N	559
SN7489N	27	SN74158N	200	SN74243N	559
SN7490N	27	SN74159N	200	SN74244N	559
SN7491N	27	SN74160N	200	SN74245N	559
SN7492N	27	SN74161N	200	SN74246N	559
SN7493N	27	SN74162N	200	SN74247N	559
SN7494N	27	SN74163N	200	SN74248N	559
SN7495N	27	SN74164N	200	SN74249N	559
SN7496N	27	SN74165N	200	SN74250N	559
SN7497N	27	SN74166N	200	SN74251N	559
SN7498N	27	SN74167N	200	SN74252N	559
SN7499N	27	SN74168N	200	SN74253N	559
SN7500N	27	SN74169N	200	SN74254N	559

MANY OTHERS AVAILABLE ON REQUEST
20% Discount for 100 Combined 7400's

CD4000	25	CD4001	25	74C00N	75
CD4001	25	CD4002	25	74C01N	65
CD4002	25	CD4003	155	74C02N	65
CD4003	25	CD4004	155	74C03N	65
CD4004	25	CD4005	155	74C04N	65
CD4005	25	CD4006	155	74C05N	65
CD4006	25	CD4007	155	74C06N	65
CD4007	25	CD4008	155	74C07N	65
CD4008	25	CD4009	155	74C08N	65
CD4009	25	CD4010	155	74C09N	65
CD4010	25	CD4011	155	74C10N	65
CD4011	25	CD4012	155	74C11N	65
CD4012	25	CD4013	155	74C12N	65
CD4013	25	CD4014	155	74C13N	65
CD4014	25	CD4015	155	74C14N	65
CD4015	25	CD4016	155	74C15N	65
CD4016	25	CD4017	155	74C16N	65
CD4017	25	CD4018	155	74C17N	65
CD4018	25	CD4019	155	74C18N	65
CD4019	25	CD4020	155	74C19N	65
CD4020	25	CD4021	155	74C20N	65
CD4021	25	CD4022	155	74C21N	65
CD4022	25	CD4023	155	74C22N	65
CD4023	25	CD4024	155	74C23N	65
CD4024	25	CD4025	155	74C24N	65
CD4025	25	CD4026	155	74C25N	65
CD4026	25	CD4027	155	74C26N	65
CD4027	25	CD4028	155	74C27N	65
CD4028	25	CD4029	155	74C28N	65
CD4029	25	CD4030	155	74C29N	65
CD4030	25	CD4031	155	74C30N	65
CD4031	25	CD4032	155	74C31N	65
CD4032	25	CD4033	155	74C32N	65
CD4033	25	CD4034	155	74C33N	65
CD4034	25	CD4035	155	74C34N	65
CD4035	25	CD4036	155	74C35N	65
CD4036	25	CD4037	155	74C36N	65
CD4037	25	CD4038	155	74C37N	65
CD4038	25	CD4039	155	74C38N	65
CD4039	25	CD4040	155	74C39N	65
CD4040	25	CD4041	155	74C40N	65
CD4041	25	CD4042	155	74C41N	65
CD4042	25	CD4043	155	74C42N	65
CD4043	25	CD4044	155	74C43N	65
CD4044	25	CD4045	155	74C44N	65
CD4045	25	CD4046	155	74C45N	65
CD4046	25	CD4047	155	74C46N	65
CD4047	25	CD4048	155	74C47N	65
CD4048	25	CD4049	155	74C48N	65
CD4049	25	CD4050	155	74C49N	65
CD4050	25	CD4051	155	74C50N	65
CD4051	25	CD4052	155	74C51N	65
CD4052	25	CD4053	155	74C52N	65
CD4053	25	CD4054	155	74C53N	65
CD4054	25	CD4055	155	74C54N	65
CD4055	25	CD4056	155	74C55N	65
CD4056	25	CD4057	155	74C56N	65
CD4057	25	CD4058	155	74C57N	65
CD4058	25	CD4059	155	74C58N	65
CD4059	25	CD4060	155	74C59N	65
CD4060	25	CD4061	155	74C60N	65
CD4061	25	CD4062	155	74C61N	65
CD4062	25	CD4063	155	74C62N	65
CD4063	25	CD4064	155	74C63N	65
CD4064	25	CD4065	155	74C64N	65
CD4065	25	CD4066	155	74C65N	65
CD4066	25	CD4067	155	74C66N	65
CD4067	25	CD4068	155	74C67N	65
CD4068	25	CD4069	155	74C68N	65
CD4069	25	CD4070	155	74C69N	65
CD4070	25	CD4071	155	74C70N	65
CD4071	25	CD4072	155	74C71N	65
CD4072	25	CD4073	155	74C72N	65
CD4073	25	CD4074	155	74C73N	65
CD4074	25	CD4075	155	74C74N	65
CD4075	25	CD4076	155	74C75N	65
CD4076	25	CD4077	155	74C76N	65
CD4077	25	CD4078	155	74C77N	65
CD4078	25	CD4079	155	74C78N	65
CD4079	25	CD4080	155	74C79N	65
CD4080	25	CD4081	155	74C80N	65
CD4081	25	CD4082	155	74C81N	65
CD4082	25	CD4083	155	74C82N	65
CD4083	25	CD4084	155	74C83N	65
CD4084	25	CD4085	155	74C84N	65
CD4085	25	CD4086	155	74C85N	65
CD4086	25	CD4087	155	74C86N	65
CD4087	25	CD4088	155	74C87N	65
CD4088	25	CD4089	155	74C88N	65
CD4089	25	CD4090	155	74C89N	65
CD4090	25	CD4091	155	74C90N	65
CD4091	25	CD4092	155	74C91N	65
CD4092	25	CD4093	155	74C92N	65
CD4093	25	CD4094	155	74C93N	65
CD4094	25	CD4095	155	74C94N	65
CD4095	25	CD4096	155	74C95N	65
CD4096	25	CD4097	155	74C96N	65
CD4097	25	CD4098	155	74C97N	65
CD4098	25	CD4099	155	74C98N	65
CD4099	25	CD4100	155	74C99N	65
CD4100	25	CD4101	155	74C00N	65

LM3000	80	LM1351N	1
--------	----	---------	---

CARBON FILM RESISTORS

IN STOCK- A FULL LINE OF QUALITY 1/4W 5% RESISTORS
STANDARD VALUES FROM 2.7 ohm to 4.7Mohm
5 for .25 10 for .40 100 for \$1.60 1000 for \$14.
(no mix of values) 100 per value for 1000 price

RESISTOR ASSORTMENTS
100 assorted values
of 1/4W or 1/2W most 5%
w/PCB cut leads..
specify 1/4W or 1/2W \$1.00

25K Trimmer
Printed Circuit Board Type
Each \$2.20
10 for \$1.50

HP
5082-4557
Bright Yellow LEDs w/panel clips 3 / \$1.00

SPECIALS
747 dual 741 OP-AMPS \$6.5
14 pin DIP 10/\$5

Rectifiers

1 Amp-Random testing indicates 1200 volts or better. Satisfaction guaranteed.
15 for \$1.00
100 for \$5.00

free intel data catalog
new 77 928 page
WITH \$25. PREPAID ORDER

SUPER LED'S

This family of LED's are mounted on a TO-5 header with a 6/32 threaded stud to secure to a heat sink... TWO AMPERES max. continuous current rating (with heat sink). LED's can be pulsed at up to 25A with low duty cycle. Data supplied w/order.

ME2 Infra Red w/low lens \$2.99 ea.
ME5 Infra Red w/high lens
MV4 Visible Red with low lens
MV4H Visible Red with high lens

150 Mhz PRESCALER

Use your low frequency counter to measure VHF or UHF frequencies. This kit will divide the input signal by ten (10 or 100 with 650MHz option)
Kit contains drilled circuit board, 2 MC10131 IC's, all parts needed and instructions.
150/170MHz KIT\$12.95
650MHz option w/11C90 IC.....\$29.95
-requires 5v at app. .2A, power supply and case are not part of kit---

Diode Array

10-IN914 SILICON SIGNAL DIODES IN ONE PACKAGE.
20 LEADS ALTERNATELY SPACED .1"; NO COMMON CONNECTIONS.
25¢ ea.
Ten for \$2.25

DIP RC NETWORKS

14 and 16 pin IC packages containing precision resistors and capacitors.
NO SCHEMATICS AVAILABLE
20 FOR \$1.

POTTER BRUMFIELD

Type KHP Relay
4 PDT 3A Contacts
24VDC COIL
650 ohms
120VAC
10.5MA



\$1.60 ea.

High Quality PCB Mounting IC Sockets

wire wrap sockets
8 pin \$.19
14 pin .19
.4 pin WW \$.36
16 pin WW .41

MOLEX

500 \$4.75 1k \$8.50
2k \$16.50 5k \$37.50

FULL WAVE BRIDGE RECTIFIERS

FULLY TESTED COSMETIC REJECTS (SCRATCHES)
500V 25A \$1.75 ea 10/\$15.
100V 25A \$1.35 ea 10/\$12

RCA DR2010 NUMITRON

RCA DR2010 Numitron digital display tube. This incandescent five-volt seven-segment device provides a .6" high numeral which can be seen at a distance of 30 feet. The tube has a standard nine-pin base (solderable) and a left-hand decimal point. Each \$4.00
5 FOR \$16 10 FOR \$30

5 WATT AUDIO AMPLIFIER

IC audio power amplifier kit. A complete kit including a drilled circuit board, 706 Fairchild IC with heat sink, and all parts to make a complete high gain (46db) power amplifier. Kit operates from single power source of 6-16VDC and drives a 4 ohm spkr.
\$8.95 each. --- 2 (stereo) for \$16.50
does not include a case or power supply

ONE AMP OP-AMP

General purpose operational amplifier in an eight pin TO-3 package. Similar to the National LH0021. Ideal for servo drive or power supply etc. use.. Data included
\$4.50 each five for \$20.

DIP TRIM POT

12 turn trimpots in a DIP package. 1/2" x 1/2" x 1/2". 5k and 200k only.... (DALE)
\$.65 ea. 10/\$4.95

special
20¢ ea.
10 \$1.50
\$12.50/c
(CLAIRE)
DUAL CDS PHOTO CONDUCTIVE CELL

Send a stamp for our flyer listing more money-saving bargains!

Orders under \$7.00 add \$1.00 postage and handling. Residents of Cal. add sales tax. Orders shipped promptly. \$10 minimum on C.O.D.s.

Phone (916)334-2161
MAIL ORDERS TO PO BOX 41778, SACRAMENTO CA. 95841

Diac
27V trigger diodes for SCR or TRIACS .25 ea

TRIACS
RCA BA 500+ V house marked
59¢ each

BABYLON ELECTRONICS



4 or 6 Digit Alarm Clock Kit Features: A. Fairchild 05' FND500 Series Display B. Display Board may be remote C. P.C. Boards, Transformer, Speaker and all the parts needed (less case). D. Detailed instructions 12 Hr. 6 Digit \$16.50 with 10 min. timer \$25.50 with timer and crystal time base \$29.50 4 Digit \$14.95 6-Digit 24 Hr. \$14.95 (no alarm)		30 MHz FREQUENCY COUNTER KIT 6 Large 0.5" Red Display Frequency Range: 100 Hz to 30 MHz Resolution: 100 Hz Kit + 250-30A + 22IC + X'tal Time Base Kit includes: Detailed instructions X'tal 2 P.C. Boards, all IC's socketed Transformer, Regulator IC, Line Cord, and all parts \$54.95	
0.8" 4 Digit Jump Display Alarm Clock Kit Features: A. Fairchild 08' FSC8000 Display Array B. Fairchild Super-Chip F-3817PC C. P.C. Board, Transformer, Speaker and all parts included (less case) D. Detailed instructions \$19.50		6 DIGIT AUTO CLOCK KIT WITH ALARM Features: A. Fairchild 05' FND D. P.C. Boards, speaker, 500 Series Display IC's and all parts. B. Display Board may be remote E. Detailed instructions \$19.95	
POWER SUPPLY KITS 220V 1.3A continuously adjustable with current limiting. Includes Transformer, P.C. Board, 2N3055, Heat Sink, and everything but the case \$10.95		MINIATURE SLIDE SWITCH DPDT 20 each 10 for \$1.75 100 for \$15.00	
TRANSISTORS GENERAL PURPOSE NPN 10/\$1.00 PNP 10/\$1.00 4 MUFFIN FAN Slightly Used--\$5.00 All in perfect Condition Satisfaction Guaranteed		TRANSFORMERS All inputs 110V AC 40 V.C.T. 10A \$14.50 30V C.T. 20A \$13.50 20V C.T. 10A \$8.00 24V 1.3A \$3.50 2 4.6.3.9-12V 1A 4 in 1 \$3.50 28V C.T. 0.6A \$2.00	
BOURNS MINIATURE TRIMMERS 3292X 2K 55¢ ea or 10 for \$5.00 330PP 2K 75¢ ea or 10 for \$6.75		THIS MONTH'S SPECIALS! SN7400 \$12 LM741 CH - To - 5 \$30 MM028C 15 MHz Clock Driver! 1.95 AY-5-3600 Keyboard Encoder by G.I. with Spec. Sheet 10.50 LM3401-12 80 LM3401-5 80 AN214-4.5W Power IC. with Spec 2.95	
WIRE-WRAP TOOLS from OK Hobby Wrap - 30 \$5.45 Hobby Wrap - Model BW-630 Battery Op. (less batt.) \$32.95		OPEN FRAME POWER SUPP. 5V @ 3A with OVP 115V AC input \$17.50	
INTER-COM BOARD Fully assembled Works on 9-15V D.C. 2 speakers make it work With Schematic ONLY \$3.00		PANEL METERS 2 1/2" X 2 1/2" 50µA \$3.50 150µA \$3.00 100µA \$3.00 300µA \$3.00 1 1/2" X 1 1/2" 50µA \$4.00	
COMPUTER GRADE CAPACITORS 18,500µF 80V \$4.50 91,000µF 20V \$4.00 100,000µF 5V \$2.50 1,000µF 200 50V \$1.00		MODULAR POWER SUPPLY 5V @ 32A 115V AC input with OVP (New) \$69.50 24V @ 12A 115V AC input (used) \$37.95 28V 3A (used) \$19.95	
TANTALUM CAPACITORS 1µ 35V 15 1µ 10V 15 3.3µ 35V 20 10µ 50V 35 22µ 35V 25		RECTIFIERS RCA House Mark. IN4001 05 1000V 3A 40 IN4002 07 600V 5A 75 IN4003 08 MOTOROLA 16 Pin IN4004 09 IN1202A 65 IN4005 10 IN1612 75 IN4006 12 MD A962-2 1.80 IN4007 14 Bridge 100V12A	
MINIATURE TOGGLE SWITCH SPDT \$1.00 DPDT \$1.25 DPDT Center off \$1.25		PUSH BUTTON SWITCH Red, White, green and yellow 30¢ ea. 4/\$1.00	

CIRCLE 35 ON FREE INFORMATION CARD

Thinker Toys™

Your single source for the most advanced S-100 components available:

- ★ Guard your Altair, IMSAI or custom system against program crashes with **CONSTANT VOLTAGE POWER SUPPLIES**, special 12 and 20-amp models from Parasitic Engineering.
- ★ **INTEGRATED CPU/Front PANEL** gives you access to all 8080 registers, I/Os and memory from octal keyboard and digital LEDs ... by Morrow Micro-Stuff.
- ★ **WunderBuss** with Noise-guard™ is the only 20-slot S-100 bus-board with two-way squelching.
- ★ **TOTAL I/O BOARD** for \$120! 3 cassette channels with control, RS232/TTY port, parallel port, memory.
- ★ Write for specs.

Thinker Toys™


505 Arlington Berkeley, Ca. 94707

photo - courtesy Peter Hollenbeck Byte Shop Berkeley

All Orders Processed Same Day!

If We Have An Out-Of-Stock Item, You Are Notified Immediately.

MODU-CLOCK

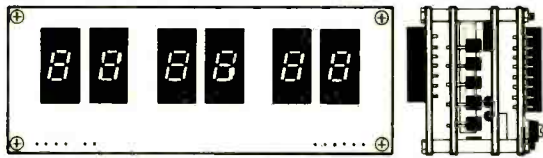

* High quality printed circuit board project. —No parts included.

THOUSANDS SOLD NATIONALLY!!!!

DESIGN UTILITIES

6-Digit LEE (Max 7, DL 707, etc.)
MM5314 Clock Chip
Can be built on A.C. or D.C. operation.
Drilled, etched and plated boards.
Clocks (timebase option).

The ultimate 6-digit clock project. Unique architecture allows versatile construction. All boards are 1.5" x 4" and mount behind each other. All connections are brought to the board's edges.

AC Version: Readout Board, Clock Board, Power Board, Complete Instructions and Parts List. **\$4.95**
ONLY

AC/DC Version (4 board set): Readout Board, Clock Board, Power Board, Timebase Board, Complete Instructions and Parts List. **\$5.95**
ONLY




DIG T-MODULE STRIP

DM-5 STRIP
5 digit strip for use with FND 500/507 LED readouts. Dim 1" x 3.5". **\$2.25/strip**

DECADE COUNTER MODULE

DCM-1



Versatile decade counter board. Utilizes a 7447 decoder-driver and a 7490 decade counter. Directly drives common anode LED readouts. Designed to be used in conjunction with our DM-5 and DM-8 digit modules. All connections brought to board's edge. **ONLY 70c ea 10 for \$6.00**

6 DIGIT READOUT BOARDS

Multiplexed connections for clocks, counters, etc. Center holes for mounting.

Part No. Use with Price Dim.

DR-63 FND 357 \$2.25 1.5" x 4"

DR-67 DL-707, MAN-1 type etc. 1.5" x 4" \$2.25

DR-65 FND 500/507/510 \$3.00 1.5" x 5"

DIGIT-MODULES

Versatile boards for mounting and wiring LED displays. For clocks, counters, timer etc.


Part No. Use with Price Dim.
DM-5 FND 500/507 50 7/8" x 1"
DM-8 FND 800/807 70 1" x 1.5"

WIRE DISPENSER

- 50 FT. ROLL OF 30 AWG. KYNAR WIRE-WRAPPING WIRE
 - CUTS THE WIRE TO LENGTH
 - STRIPS 1 INCH OF INSULATION
- AVAILABLE IN FOUR COLORS

WD-30-B BLUE WIRE
WD-30-Y YELLOW WIRE
WD-30-W WHITE WIRE
WD-30-R RED WIRE **\$3.45 EACH**

MODEL WD-30



COOKBOOKS

• **CMOS COOKBOOK** by Don Lancaster, pub. Howard W. Sams Company. Another winner from Don Lancaster, author of the famous RTL and TTL Cookbooks. The CMOS Cookbook details the application of CMOS, the low power logic family suitable for most applications presently dominated by TTL. The book follows the style of the original Cookbooks. Eight chapters cover all facets of CMOS logic, and the work is prefaced by 100 pages detailing the characteristics of most CMOS circuits. The CMOS Cookbook is required reading for every serious digital experimenter. **\$9.95**

• **TVT COOKBOOK** by Donald Lancaster, describes the use of a standard television receiver as a microprocessor CRT terminal. Explains and describes character generation, cursor control and interface information in typical, easy-to-understand Lancaster style. This book is a required text for both the microcomputer enthusiast and the amateur RTTY operator who desires a quiet alternative to noisy teletype machines. **\$9.95**

• **TTL COOKBOOK** by Donald Lancaster. Explains what TTL is, how it works, and how to use it. Discusses practical applications, such as a digital counter and display system, events counter, electronic stopwatch, digital voltmeter, and a digital tachometer. 336 pages, 5 1/2 x 8 1/2, softbound. **\$9.95**

• **IC OP-AMP COOKBOOK** by Walter G. Jung. Covers not only the basic theory of the IC op amp is great detail, but also includes over 250 practical circuit applications, liberally illustrated. 592 pages, 5 1/2 x 8 1/2, soft bound. **\$12.95**

RUBBER FEET



Model, address number list. Applies to any smooth flat surface such as glass, metal, wood, etc. Non-slip, non-stain. Peel off easily from 24" x 12" to 12" x 12".
12 ea. 8c 12 ea. 6c
12 ea. 7c 12 ea. 55c

ALARM CLOCK MODULE

displays Hours, Minutes, and Seconds

FEATURES:

- GIANT .7 INCH RED LED READOUTS
- COMPLETE FACTORY TESTED MODULES
- SPECIAL TRANSFORMER
- SECONDS DISPLAY
- BRIGHTNESS CONTROL
- 12 OR 24 HOUR OPTION
- SLEEP AND SNOOZE TIMERS
- PRESETTABLE 59 MINUTE SLEEP TIMER
- 9 MINUTE SNOOZE ALARM
- AM — PM INDICATOR
- COMES COMPLETE WITH 6 PAGE INSTRUCTION BOOKLET



NEW!!!

SATISFACTION GUARANTEED!!!

THE ULTIMATE CLOCK PROJECT!!
Order Now!
ONLY \$12.95
3 for \$4

Data sheets, Specifications, Applications information.
New TTL Data Book. Only \$4.95



The TTL Data Book, second edition, 325 pages. **\$4.95**

Five more valuable reference aids.

- The Optoelectronics Data Book, 368 pages, \$2.95.
- The Semiconductor Memory Data Book, 272 pages, \$2.95.
- The Transistor and Diode Data Book, 1,248 pages, \$4.95.
- The Linear Control Circuits Data Book, 365 pages, \$2.95.
- The Power Semiconductor Data Book, 816 pages, \$3.95.

The newest edition of the TTL Data Book for Design Engineers. Detailed specifications on over 300 TTL device types. Standard TTL, high-technology Schottky-clamped TTL. Pin assignment drawings of all TTL types. The most complete book on TTL logic written by the same company that invented the IC.


A must for every scientist, engineer, and technician!!!

SATISFACTION GUARANTEED!!!!

Catalog-In-A-Box™

JBS EXCLUSIVE!

NEW!!!

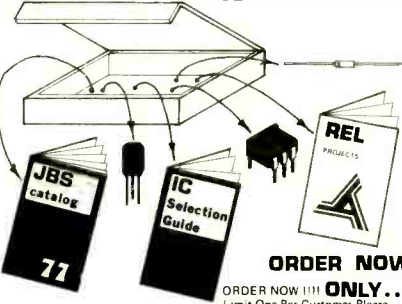

Each CATALOG-IN-A-BOX™

Contains:

- Sample of transistors, IC's, capacitors, resistors. Worth over \$1.00 in merchandise.
- JBS GIANT full-line catalog with outstanding buys on electronics.
- IC selection guide. Handy selection and pricing guide for digital and linear IC's.
- REL projects catalog.

Just send \$2.00 cash, check or V.O. for immediate delivery. No minimum order for CATALOG-IN-A-BOX™.

ORDER NOW!!

\$2.00

ORDER NOW!!! ONLY....
Limit One Per Customer Please.
ORDER TODAY!!!!
You must be satisfied or your money back.

Our Third Big Year Serving The Scientist, Engineer, OEM Manufacturer And Hobbyist.

Highest Quality Merchandise! Fastest Service!

Customer Satisfaction Guarantee

We specialize in fast, prompt service with total customer satisfaction!! All items are guaranteed for 30 days from date of shipment, providing that no user inflicted damage has occurred.

STORE HOURS: 9:30 - 5:30 Weekdays
9:30 - 3:00 Saturdays

JBS
ELECTRONICS, inc.

3050 VALMONT BOULDER, COLO. 80301 (303) 442-1212

TERMS

ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE
ALL MERCHANDISE SUBJECT TO PRIOR SALE
POSTAGE & HANDLING ADD \$1
3 1/2% STATE TAX (COLO. RES.)
MINIMUM ORDER \$5.00
NO C.O.D.'S

© COPYRIGHT 1977 JBS

CIRCLE 21 ON FREE INFORMATION CARD

Radio Hut

Money back guarantee. NO COD'S. Texas residents add 5% sales tax. Add 5% of order for postage and handling. Orders under \$15.00 add 75 cents. Foreign orders add 10% for postage.

For your convenience, call your BankAmericard or Master Charge orders in on our Toll Free Watts Line: 1-800-527-2304. Texas residents call collect: 1-214-271-8423.



P. O. Box 64783R
Dallas, Texas 75206



Memorex computer boards with IC's, diodes, transistor, etc. 5 Boards containing 100 - 200 IC's
ONLY \$ 4.25

BRIDGE RECTIFIERS

6 Amp	50V	1.10
10 Amp	50V	1.25
25 Amp	50V	1.39

RESISTORS

Over 50,000,000 in stock
 1330 ohm 22K ohm
 470 ohm 27K ohm
 1680 ohm 33K ohm
 1K ohm 39K ohm
 1.2K ohm 43K ohm
 2.2K ohm 47K ohm
 3.3K ohm 82K ohm
 4.7K ohm 100K ohm
 6.8K ohm 150K ohm
 10K ohm 220K ohm
 20K ohm

MK 5005

4 digit counter/latch decoder; 7 segment output only. 24 pin dip with specs.
\$ 8.00 EACH

UNSCRAMBLER KIT for all Scanners

- Tunes easily
 - Full instructions included
 - Easy to install
 - 3 1/2" x 3 1/2" x 1 1/2"
- Only \$19.95**

1/8 W only
 1/2 W only
 All resistors are P.C. Lead but are not pull offs.
 100 min. order for each value
 NO MIX 100/99

PLASMA DISPLAY KIT

Kit Includes: 12 digit display .4" Character Power supply for display above Complete specs for hookup.

Line cord Not Included. **ONLY \$ 3.95**



SPECIAL DEVICES

82S23	2.19
2513	10.00
2102-1	.99
1101A	.75
1103A	1.10
8T13	1.50
8T97	1.25
MM5233	1.50
300KC xtal	1.50

REGULATORS

7805	7818
7806	7824
7808	7905
7812	7912
7815	7915

Your Choice \$.95


READOUTS

Best Value!

FND70 .4"C.C. .59
 FND800 .8"C.C. 1.69
 TI 6 digit array C.C. 3/1.00
 MAN 8 .3"CA Yellow .89
 LT767 .7" C.C. 4 digit stick **\$ 3.95**

WATERGATE SPECIAL

Telephone Relay automatically starts and stops tape recorder. No batteries required. Kit complete with drilled P.C. Board.
Parts and Case ONLY \$ 10.95



VARIABLE POWER SUPPLY KIT NO. 1

- *Continuously variable from 5V to 20V
- *Excellent regulation up to 500 mil.
- *4400 Mfd of filtering
- *Drilled fiberglass PC Board
- *One hour assembly
- *Kit includes all components
- *Case Included **ONLY \$10.95**

VARIABLE POWER SUPPLY KIT NO. 2

Same as above but with 1 amp output, also with case. **ONLY \$13.95**

CLOCK KIT

- Kit includes
- LT701 clock module
 - Power Supply
 - Punched Case
 - 12 or 24 hour operation
- Complete except for line cord**
 LT701E 12 hour clock



ONLY \$ 14.95

BATTERY CLIPS

Standard 9V battery clip with 4-1/2" tinned leads. **25/\$1.00**

TRANSISTORS - DIODES

*MJE1103	3/1.00
MJ3001	1.30
2N2222	6/1.00
2N2369	6/1.00
2N2905	4/1.00
2N2907	15/1.00
2N3906	6/1.00
2N4000	6/1.00
2N4443 SCR	3/1.00
1N4004	15/1.00
1N4007	10/1.00
1N4148 (1N914)	20/1.00
3N201 VHF Pre amp	.80
D40C1 Power Darl - 8/1.00	2.00
EN930	.20
IN746	25

*House numbered and P.C. Lead

TTL

7400	.17	7473	.21
7401	.17	74H74	.45
7402	.17	7474	.35
7403	.17	7475	.55
74H04	.25	7476	.35
74S04	.30	7480	.45
7404	.17	7483	.76
7406	.25	7485	.89
7408	.17	7486	.35
7409	.17	7490	.71
7410	.17	7491	.71
7411	.25	7492	.67
7413	.45	7493	.67
7420	.17	7494	.90
7421	.17	7495	.71
7423	.35	7496	.85
7425	.27	74100	.96
7426	.25	74121	.31
7427	.17	74123	.61
7430	.25	74125	.44
7432	.30	74141	.71
7437	.35	74145	.97
7438	.35	74151	.71
7440	.17	74153	.81
7442	.60	74154	.97
7443	.60	74161	.91
7444	.65	74163	1.05
7446	.85	74164	1.05
74L47	1.75	74174	.91
7447	.81	74175	1.40
7448	.81	74180	.76
7449	.20	74181	2.25
7451	.17	74191	1.20
7453	.17	74192	1.20
7454	.17	74193	.95
7470	.35	74S195	1.05
7472	.21	74195	.65

SOCKETS

14 pin	.22
16 pin	.25
18 pin	.25
24 pin (ww only)	.95
28 pin	.35
40 pin	.50

CMOS SALE

CD4000	.16
CD4001	.16
CD4002	.16
CD4007	.16
CD4009	.45
CD4010	.45
CD4011	.16
CD4012	.16
CD4013	.29
CD4014	.75
CD4015	.75
CD4016	.29
CD4017	.80
CD4018	.80
CD4019	.39
CD4020	.95
CD4021	.90
CD4022	.90
CD4024	.70
CD4025	.19
CD4027	.39
CD4028	.75
CD4029	.99
CD4030	.16
CD4034	2.30
CD4053	.90
CD4040	1.00
CD4041	.69
CD4042	.59
CD4043	.60
CD4044	.59
CD4046	.90
CD4047	.59
CD4049	.35
CD4050	.35
CD4051	.90
CD4052	.90
CD4056	1.00
CD4058	.90
CD4060	1.00
CD4066	.69
CD4069	.30
CD4071	.16
CD4076	.99
74C04	.29
74C107	.29
CD4116	.36
CD4507	.40
CD4512	.50
CD4516	.85
CD4518	.85
CD4520	.85

LS

74LS00	.26	74LS145	1.00
74LS02	.26	74LS151	.70
74LS03	.26	74LS153	.70
74LS04	.30	74LS155	.69
74LS05	.32	74LS156	.76
74LS08	.26	74LS157	.95
74LS09	.26	74LS158	.85
74LS10	.26	74LS160	.85
74LS11	.35	74LS161	.85
74LS13	.58	74LS162	.85
74LS14	1.05	74LS163	.85
74LS15	.26	74LS168	.85
74LS20	.24	74LS169	.85
74LS21	.35	74LS170	2.00
74LS22	.35	74LS173	1.10
74LS26	.35	74LS174	1.00
74LS27	.35	74LS175	1.00
74LS30	.34	74LS190	.95
74LS32	.35	74LS191	.95
74LS37	.33	74LS192	.95
74LS38	.38	74LS193	.95
74LS40	.34	74LS194	.95
74LS42	.49	74LS195	.95
74LS51	.26	74LS196	.85
74LS54	.26	74LS197	.85
74LS55	.26	74LS251	.85
74LS73	.75	74LS253	.85
74LS74	.49	74LS257	.85
74LS76	.49	74LS258	.85
74LS86	.45	74LS260	.26
74LS90	.85	74LS266	.26
74LS92	1.00	74LS279	.55
74LS93	1.00	74LS290	.75
74LS109	.49	74LS293	.75
74LS112	.49	74LS295	.95
74LS113	.40	74LS298	.95
74LS114	.40	74LS365	.55
74LS125	.55	74LS366	.55
74LS126	.60	74LS367	.55
74LS132	1.00	74LS368	.55
74LS133	.35	74LS390	1.75
74LS136	.39	74LS393	1.45
74LS138	.85	74LS670	3.25
74LS139	.85		

60 Hz L(•)•(•)K

Crystal Time Base Kit - Kit

enables a MOS clock circuit to operate from a DC power source. Ideal for car, camper, van, boat, etc. 60Hz output with an accuracy of .005% (typ.) Low power consumption 2.5 ma (typ.). Small size will fit most any enclosure. Single MOS IC oscillator/divider chip 5-15 volts DC operation.

ONLY \$ 5.95
2 for \$10.00

RADIO HUT GUARANTEE

If you are not satisfied with any of our products NO MATTER WHAT THE REASON we offer you a full money back guarantee if the product or products are returned within 14 days after you receive them.


ORDER BY PHONE. Charge your order to BankAmericard or Master Charge.

USE OUR TOLL FREE WATTS

1-800-527-2304

NEW!

ELECTRONIC TOUCH ORGAN KIT



Fantastic new design uses CMOS I.C. and a total of 39 semi-conductors to give a touch control keyboard, all the electronic parts in one PC Board. This organ is easy to build, yet has features like a full two-octave range touch keyboard, variable tremolo; two voices; built-in I.C. amplifier with volume control, complete with speaker and a specially designed plexi-glass case.

BATTERIES NOT INCLUDED * Ideal kit for beginner or gift for children **\$24.50 ea.**

SLIM LINE CALCULATOR

6 Functions with % and memory
8 Digits LED display
*One full year guarantee
Special Price Only
\$8.50 Ea.



BATTERIES NOT INCLUDED

CALCULATOR with STOPWATCH

6 Functions with % and memory
8 Digits big green display
*Built-in X'tal controlled stop watch count to 1/10 of a second.
Special Price Only
\$16.50 Ea.




BATTERIES NOT INCLUDED

I.C. TEST CLIPS

Same as the E-Z clips
With 20" Long Leads
In Black and Red Colors
\$1.75 Per Pair



12V DC REED RELAY SPDT
DATRON/ES DIV.
PART NO. LH30-029
\$1.25 ea




Multi-Color LED Indicator
Red—Green Colors in one LED
with Plastic Housing
99¢ Ea.
Voltage 2V 20 MA per LED



TIMER KIT

Time Controlled from 1-100sec.
Ideal to be used as time delay unit for burglar alarm, photo service, and other purposes. Max. loading 110V, 2 AMP. Supply voltage 12 18V D.C.
\$11.50 each



FT-90 ELECTRONIC IC TIMER

Electronic Police Siren Kit

Ideal for use as an alarm unit. High output up to 5 watt at 12V DC supply. Can be used with horn-type speaker.
\$14.00 each



AU-999 POLICE ALARM UNIT

Music on Light in Colour! COLOR ORGAN KIT

Operates in low voltage (9 V 24V DC). Can control up to 100 low voltage light bulbs. Light bulbs change colors to the tones of music. Connect to the speaker output of the amplifier.
\$10.50 per kit



MC-580 MINI MUSIC COLOR UNIT

Don't move! LIGHT CONTROL SWITCH KIT

Can control TV, radio, lights or can be used with the Police Siren Kit to form a burglar alarm system.
\$4.50 each



RC-102

POWER SUPPLY KIT


0-35V D.C. REGULATED
Uses UA723 and ZN3055 Power TR output can be adjusted from 0.35V, 2 AMP. Complete with PC board and all electronic parts.
\$9.50 each



035 POWER SUPPLY

MA1003, 12V DC CLOCK MODULE

Built in X'TAL controlled time base. Protected against automotive volt transients. Automatic brightness control with 0.3" green color display. Display turnoff with ignition "OFF".
\$23.50 EACH



MINI-MINI TOGGLE SWITCH

Half-size of submini toggle switch rated 3 amp 125V AC contact

1-9	10-99
MS-2432P SPST	0.90 0.80
MS-244 SPDT	1.00 0.90
MS-245 DPDT	1.20 1.10



LARGE QUANTITY AVAILABLE FOR OEM

TV Games

Direct Sales Only
\$29.50

FEATURES:
* 4 Games—Tennis, Hockey, Racquet Handball and Single Handball.
* Auto counter display on the screen.



5W AUDIO AMP KIT

Use 2 LM 380 with Volume Control
Power Supply 6 18V DC
only \$5.00 ea.



TV GAME MODULATOR UNIT


FCC Approved For channel 3 and 4 With Occ. Coil
ONLY \$4.50

TI 1955
Alternative AY 8500-1
6 Game (28 Pin Dip)
TV Game Chip with Data
Tennis Squash hockey,
Practice & 2 shooting
Special Only \$11.00



WIRE WRAPPING TOOL

\$33.50
Wire Wrapping Wire in Bulk
Red or Black



QUARTZ CRYSTALS

1 MHz	\$4.95
2 MHz	\$6.25
4 MHz	\$8.25
10 MHz	\$5.25
3.579 MHz	\$1.25

Color TV Type



SAE DIP SWITCHES

Part No 1004 692 4XSPST SW
100R 692 8XSPST SW

4 Toggle SPST Switches on a Mini-DIP (8 pins) Only \$1.50 ea
8 Toggle SPST Switches on a DIP (16 pins) Only \$2.00 ea



SUBMINIATURES TOGGLE SWITCHES

SPDT On/Off	\$1.30 ea
DPDT On/Off	\$1.50 ea
3PDT On/Off	\$1.75 ea

Mini Size Color Type
Also Available at the Same Price



QUAD VOLUME CONTROL

4 100K Volume pot in one unit, vary resistance proportional to the angle of the stick. Perfect for electronic games or model remote control.
only \$7.50



PUSH-BUTTON SWITCH

N/Open Contact
Color: Red, White, Blue, Green, Black. **4/\$1.00**
N/Close also **50¢ ea.**
LARGE QTY. AVAILABLE



SOLID STATE ELECTRONIC BUZZER

Mini Size 11 1/2" x 4" x 3/4"
Supply voltage 1.5V 12V
Ideal for Alarm or Tone Indicator
\$1.50 each or \$2.50



MATCHED PAIR POWER TRANSISTORS

MOTOROLA MJE2955 PNP
MJE3055 NPN
10 AMP 60 VOLT 90 WATTS
\$2.25 PER PAIR



Sub Mini Size PANEL METER

500 U.A.
ONLY \$1.20 ea



AC POWER SUPPLY

Adapter Type Transformer
12V AC 200 MA Output
\$2.75 Each



4 Digits Alarm Clock

LT701E, 60Hz, 12 hr. display
LT701G, 60Hz, 24 hr. display
Power Supply 12V AC
Ideal for panel clock, desk clock or auto clock without time base
\$13.50 EACH



500 U.A. VU METER

Special Price
2 for \$1.99



50 U.A. PANEL METER

First designed for metal & metal Scaled from 0-10 but can be erased and volume scale put on top. Brand new in box
Only \$3.80 ea



MINIMUM ORDER \$10.00 California residents add 6% sales tax.
All orders add 10% postage for out of state. Overseas countries add 15% of total order for postage.
SEND CHECK OR MONEY ORDER TO

8/77



FORMULA INTERNATIONAL INC.

12603 CRENSHAW BOULEVARD • HAWTHORNE, CALIFORNIA 90250

For more information please call (213) 679-5162

STORE HOURS 10-7 Monday - Saturday



Vaco.

VACO TOOL CENTER EVERY TOOL UNCONDITIONALLY GUARANTEED

VACO TOOL CENTER EVERY TOOL UNCONDITIONALLY GUARANTEED



On Display

Let Vaco catch their eye. Vaco offers real merchandising versatility with packaging and displays that really sell. New consumer-tested cards are color-coded by tool type. There's the right size display for every need. For the wall, the floor, the counter. All holding the finest tools available. For more on the Vaco merchandising program, send for our FREE Merchandising Catalog. Just write:

Vaco Products Co., 510 N. Dearborn St., Chicago, Illinois 60610.

CIRCLE 2 ON FREE INFORMATION CARD

Send for VACO's FREE

Tools & Fixin Things
**MERCHANDISING
IDEA BOOK**

VACO

Merchandising aids for the entire Vaco selection.

Merchandising Catalog!

Introducing the mobile that can move you out of the world of the ordinary and into the world of the serious CB'er. The Cobra 138XLR Single Sideband. Sidebanding puts you in your own private world. A world where there's less congestion. More privacy. More time to talk.



It's all possible because instead of 40 channels you get your choice of 120 channels. Both AM and SSB. And instead of 4 watts of legal power you get 12 watts of legal power. So you get almost double the range of AM.

With the 138XLR Single Sideband there's less background noise and less interference. So there's cleaner, clearer reception. Because like all Cobras, the 138XLR SSB is engineered to punch through loud and clear. Even in crowded metropolitan areas.

And like all Cobras it comes equipped with such standard features as an easy-to-read LED channel indicator. Switchable noise blanking and limiting. An RF/signal strength meter. And Cobra's exclusive DynaMike gain control.

You'll find the 138XLR SSB wherever Cobras are sold. Which is almost everywhere. Because Cobra's got a nationwide network of dealers and Authorized Service Centers offering sales, installation, service and advice. So come on in. And move on up.



Punches through loud and clear.

Cobra Communications Products
DYNASCAN CORPORATION
6460 W. Cortland St., Chicago, Illinois 60635

Write for color brochure
EXPORTERS: Empire • Plainville, N.Y. • CANADA, Atlas Electronics • Toronto

UPWARD MOBILITY.



CIRCLE 3 ON FREE INFORMATION CARD