


## 2 W TRIPLE OUTPUT DC-DC CONVERTER

Type	V <sub>in</sub>	V <sub>out</sub>	I <sub>out</sub>
GS2T5-5D15	5 V	+ 5 V	+ 50 mA
		+ 15 V	+ 70 mA
		- 15 V	- 70 mA

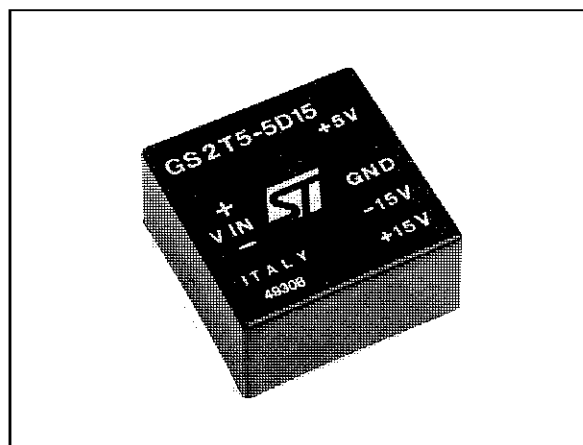

### DESCRIPTION


The GS2T5-5D15 is a 2.3W DC-DC converter designed to provide an isolated 5V/50mA, +15V/70mA and -15V/70mA power source.

The module operates from a 5V input source and offers 2500Vdc isolation.

### ELECTRICAL CHARACTERISTICS (T<sub>amb.</sub> = 25° C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V <sub>i</sub>	Input Voltage	V <sub>o1</sub> = +5V V <sub>o2</sub> = +15V V <sub>o3</sub> = -15V I <sub>o1</sub> = 3 to 50mA I <sub>o2</sub> = 5 to 70mA I <sub>o3</sub> = -5 to -70mA	4.7	5.0	5.3	V
I <sub>ir</sub>	Input Reflected Current	V <sub>i</sub> = 4.7 to 5.3V Full Load			150	mApp
V <sub>o1</sub>	Output Voltage 1	V <sub>i</sub> = 4.7 to 5.3V I <sub>o1</sub> = 3 to 50mA	4.75	5.00	5.25	V
V <sub>o2</sub>	Output Voltage 2	V <sub>i</sub> = 4.7 to 5.3V I <sub>o2</sub> = 5 to 70mA	14.25	15.00	15.75	V
V <sub>o3</sub>	Output Voltage 3	V <sub>i</sub> = 4.7 to 5.3V I <sub>o3</sub> = -5 to -70mA	-14.25	-15.00	-15.75	V
V <sub>or1</sub>	Output Ripple Voltage 1	V <sub>i</sub> = 4.7 to 5.3V I <sub>o1</sub> = 50mA			50	mVpp
V <sub>or2</sub>	Output Ripple Voltage 2	V <sub>i</sub> = 4.7 to 5.3V I <sub>o2</sub> = 70mA			100	mVpp
V <sub>or3</sub>	Output Ripple Voltage 3	V <sub>i</sub> = 4.7 to 5.3V I <sub>o3</sub> = -70mA			100	mVpp
I <sub>o1</sub>	Output Current 1	V <sub>i</sub> = 4.7 to 5.3V V <sub>o1</sub> = 5V	3		50	mA
I <sub>o2</sub>	Output Current 2	V <sub>i</sub> = 4.7 to 5.3V V <sub>o2</sub> = +15V	5		70	mA
I <sub>o3</sub>	Output Current 3	V <sub>i</sub> = 4.7 to 5.3V V <sub>o3</sub> = -15V	-5		-70	mA
V <sub>is</sub>	Isolation Voltage		2500			Vdc
f <sub>s</sub>	Switching Frequency	V <sub>i</sub> = 5V Full Load		50		kHz
η	Efficiency	V <sub>i</sub> = 5V Full Load	70	75		%
T <sub>op</sub>	Operating Temperature Range		0		+70	°C
T <sub>stg</sub>	Storage Temperature Range		-40		+85	°C

CONNECTION DIAGRAM AND MECHANICAL DATA

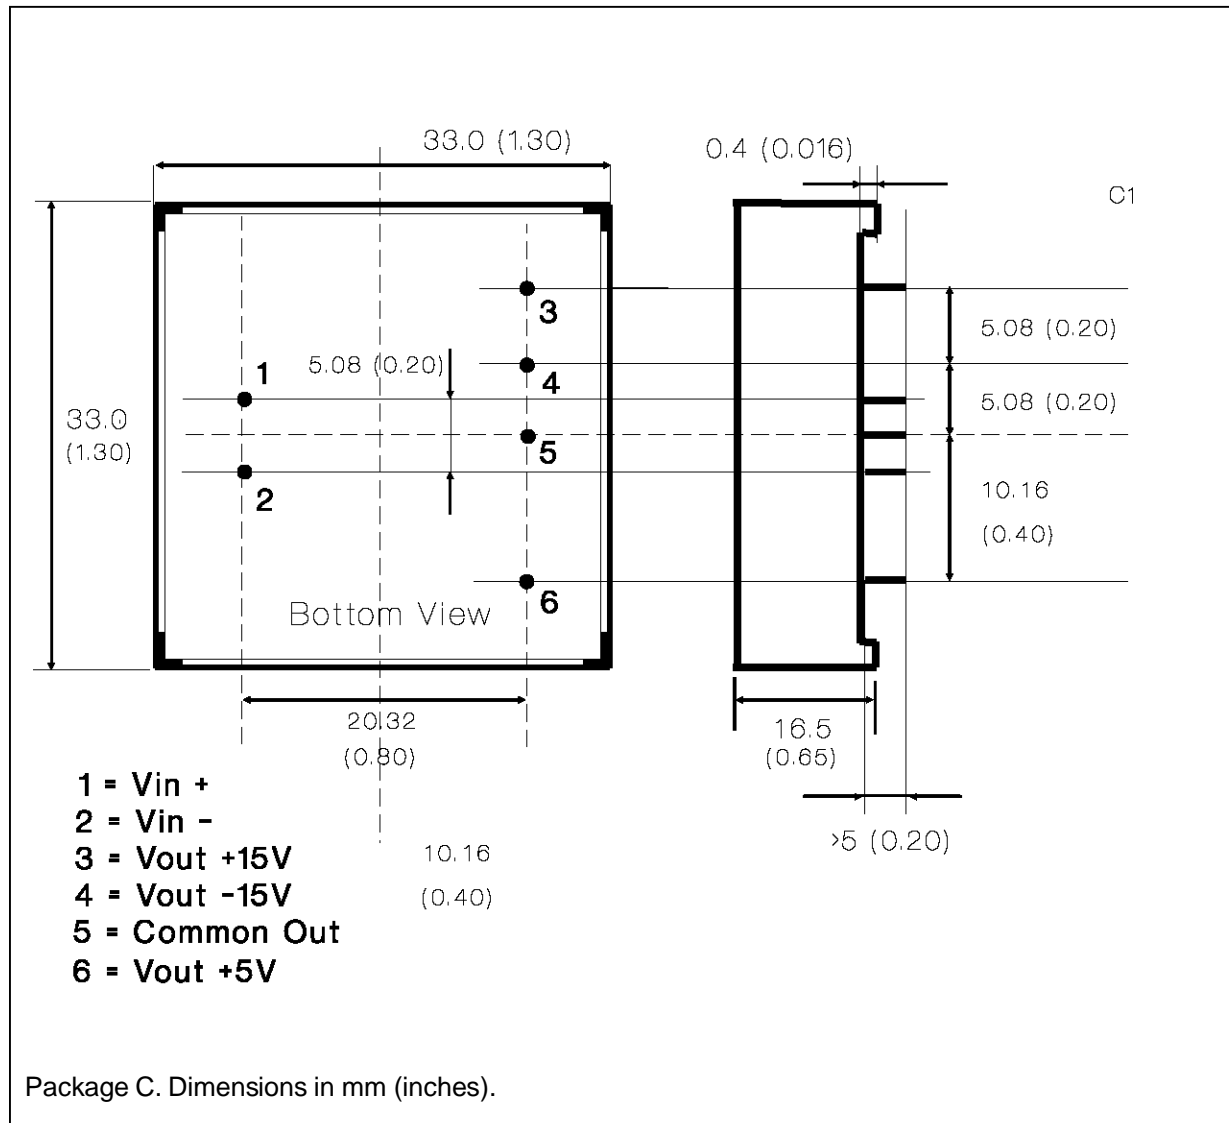

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics – All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
 Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
 Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.