


## HIGH-CURRENT SWITCH


### DESCRIPTION

The 2N3724 is a silicon planar epitaxial transistor in TO-39 metal case. It is a high-current switch used for memory applications requiring breakdown voltages up to 30 V and operating currents to 1 A.



TO-39

### INTERNAL SCHEMATIC DIAGRAM



### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-base Voltage ( $I_E = 0$ )	50	V
$V_{CES}$	Collector-emitter Voltage ( $V_{BE} = 0$ )	50	V
$V_{CEO}$	Collector-emitter Voltage ( $I_B = 0$ )	30	V
$V_{EBO}$	Emitter-base Voltage ( $I_C = 0$ )	6	V
$I_C$	Collector Current	1	A
$P_{tot}$	Total Power Dissipation at $T_{amb} \leq 25^\circ\text{C}$ at $T_{case} \leq 25^\circ\text{C}$	0.8 3.5	W W
$T_{stg}, T_j$	Storage and Junction Temperature	- 65 to 200	°C

## THERMAL DATA

$R_{th\ j\text{-case}}$	Thermal Resistance Junction-case	Max	50	$^{\circ}\text{C/W}$
$R_{th\ j\text{-amb}}$	Thermal Resistance Junction-ambient	Max	220	$^{\circ}\text{C/W}$


ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CBO}$	Collector Cutoff Current ( $I_E = 0$ )	$V_{CB} = 40\text{ V}$ $V_{CB} = 40\text{ V}$ $T_{amb} = 100^{\circ}\text{C}$			1.7 120	$\mu\text{A}$ $\mu\text{A}$
$V_{(BR)CBO}$	Collector-base Breakdown Voltage ( $I_E = 0$ )	$I_C = 10\text{ }\mu\text{A}$	50			V
$V_{(BR)CES}$	Collector-emitter Breakdown Voltage ( $V_{BE} = 0$ )	$I_C = 10\text{ }\mu\text{A}$	50			V
$V_{(BR)CEO}^*$	Collector-emitter Breakdown Voltage ( $I_B = 0$ )	$I_C = 10\text{ mA}$	30			V
$V_{(BR)EBO}$	Emitter-base Breakdown Voltage ( $I_C = 0$ )	$I_E = 10\text{ }\mu\text{A}$	6			V
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ $I_C = 300\text{ mA}$ $I_B = 30\text{ mA}$ $I_C = 500\text{ mA}$ $I_B = 50\text{ mA}$ $I_C = 800\text{ mA}$ $I_B = 80\text{ mA}$ $I_C = 1000\text{ mA}$ $I_B = 100\text{ mA}$			0.25 0.20 0.32 0.42 0.65 0.75	V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ $I_C = 300\text{ mA}$ $I_B = 30\text{ mA}$ $I_C = 500\text{ mA}$ $I_B = 50\text{ mA}$ $I_C = 800\text{ mA}$ $I_B = 80\text{ mA}$ $I_C = 1000\text{ mA}$ $I_B = 100\text{ mA}$	0.9	0.64 0.75 0.89 1.1 1.2 1.0 1.1	0.76 0.86 1.1 1.2 1.5 1.7	V
$h_{FE}^*$	DC Current Gain	$I_C = 10\text{ mA}$ $V_{CE} = 1\text{ V}$ $I_C = 100\text{ mA}$ $V_{CE} = 1\text{ V}$ $I_C = 300\text{ mA}$ $V_{CE} = 1\text{ V}$ $I_C = 1000\text{ mA}$ $V_{CE} = 5\text{ V}$ $I_C = 800\text{ mA}$ $V_{CE} = 2\text{ V}$ $I_C = 500\text{ mA}$ $V_{CE} = 1\text{ V}$	30 60 40 30 25 35	60 90 60	150	
$h_{fe}$	High Frequency Current Gain	$I_C = 50\text{ mA}$ $V_{CE} = 10\text{ V}$ $f = 100\text{ MHz}$	3			
$C_{CBO}$	Collector-base Capacitance	$I_C = 0$ $V_{CB} = 10\text{ V}$ $f = 1\text{ MHz}$			12	pF
$C_{EBO}$	Emitter-base Capacitance	$I_C = 0$ $V_{EB} = 0.5\text{ V}$ $f = 1\text{ MHz}$			55	pF
$t_{on}^{**}$	Turn-on Time	$I_C = 500\text{ mA}$ $V_{CC} = 30\text{ V}$ $I_B = 50\text{ mA}$			35	ns
$t_{off}^{**}$	Turn off Time	$I_C = 500\text{ mA}$ $V_{CC} = 30\text{ V}$ $I_{B1} = -I_{B2} = 50\text{ mA}$			60	ns



\* Pulsed : pulse duration = 300  $\mu\text{s}$ , duty cycle = 1 %.

\*\* See test circuit.

## Switching Characteristics.

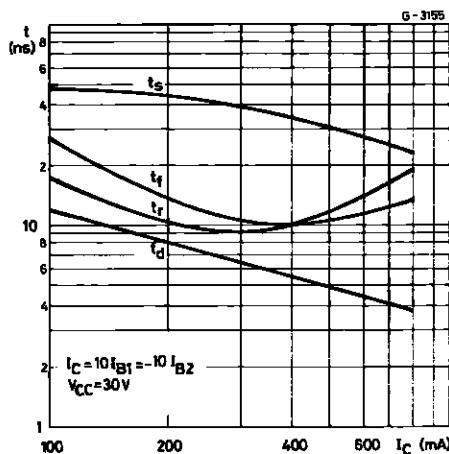


## Switching Characteristics.

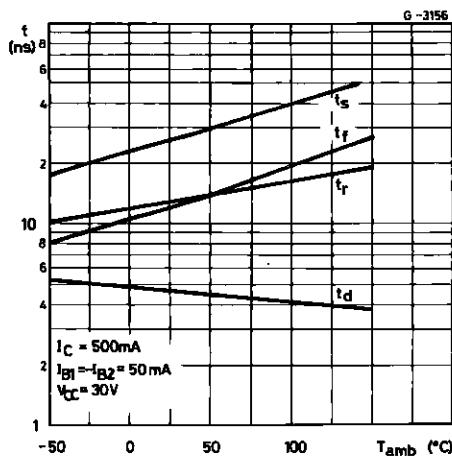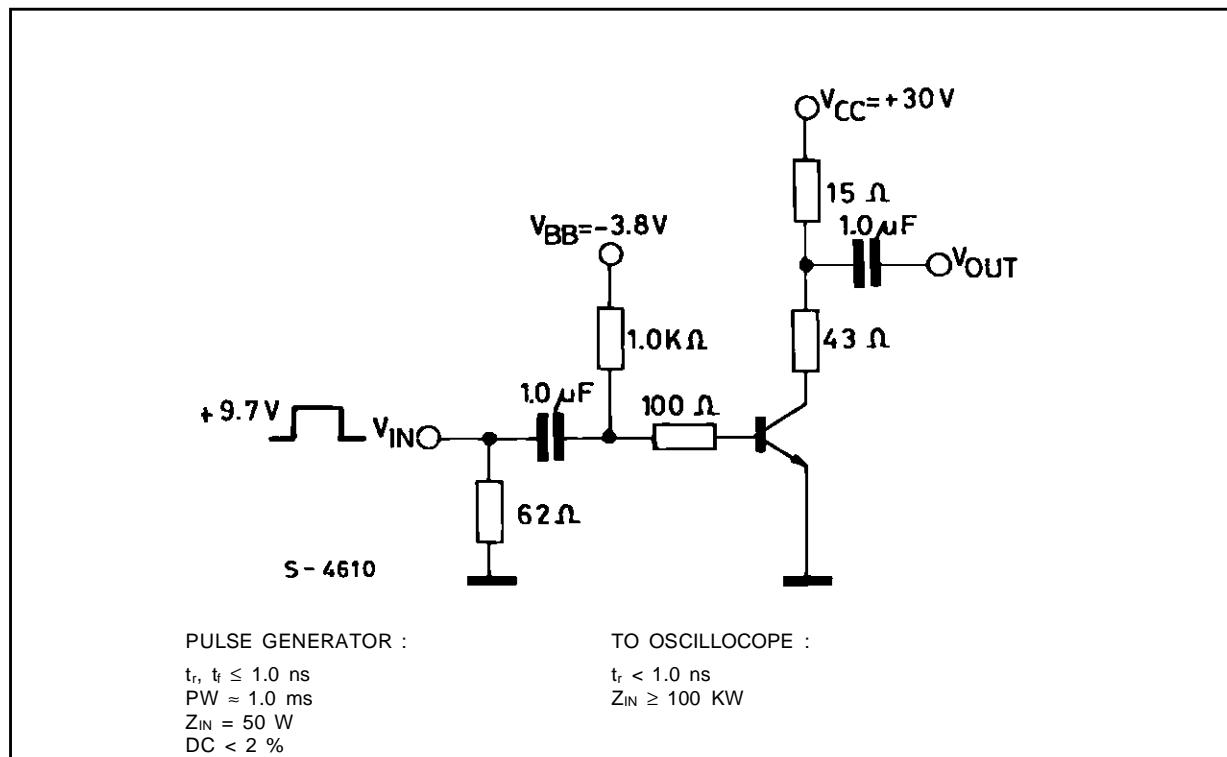Test Circuit for  $t_{on}$ ,  $t_{off}$ .

## TO39 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	12.7			0.500		
B			0.49			0.019
D			6.6			0.260
E			8.5			0.334
F			9.4			0.370
G	5.08			0.200		
H			1.2			0.047
I			0.9			0.035
L	45° (typ.)					

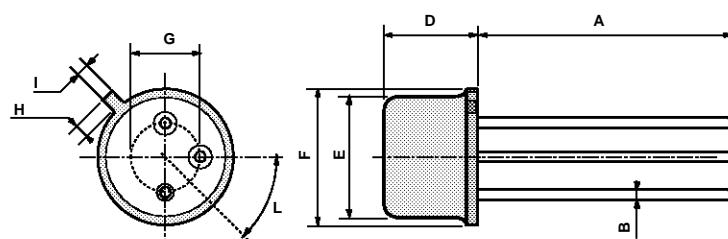

P008B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A