



## NPN TRANSISTOR POWER MODULE

ADVANCE DATA

- HIGH CURRENT POWER BIPOLAR MODULE
- VERY LOW  $R_{th}$  JUNCTION CASE
- SPECIFIED ACCIDENTAL OVERLOAD AREAS
- ISOLATED CASE (2500V RMS)
- EASY TO MOUNT
- LOW INTERNAL PARASITIC INDUCTANCE

### INDUSTRIAL APPLICATIONS:

- MOTOR CONTROL
- SMPS & UPS
- WELDING EQUIPMENT

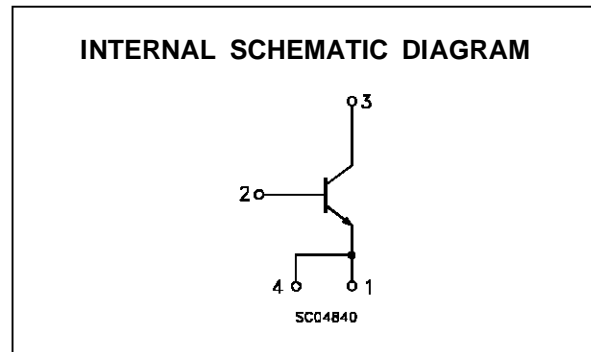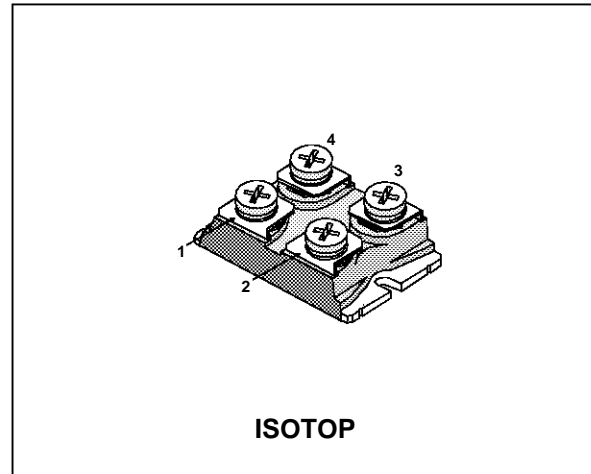

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CEV}$	Collector-Emitter Voltage ( $V_{BE} = -5$ V)	1200	V
$V_{CEO(sus)}$	Collector-Emitter Voltage ( $I_B = 0$ )	700	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	7	V
$I_C$	Collector Current	45	A
$I_{CM}$	Collector Peak Current ( $t_p = 10$ ms)	60	A
$I_B$	Base Current	15	A
$I_{BM}$	Base Peak Current ( $t_p = 10$ ms)	25	A
$P_{tot}$	Total Dissipation at $T_c = 25$ °C	250	W
$T_{stg}$	Storage Temperature	-55 to 150	°C
$T_j$	Max. Operating Junction Temperature	150	°C
$V_{ISO}$	Insulation Withstand Voltage (AC-RMS)	2500	V

## BUV298CV

### THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	0.5	°C/W
$R_{thc-h}$	Thermal Resistance Case-heatsink With Conductive Grease Applied	Max	0.05	°C/W


### ELECTRICAL CHARACTERISTICS ( $T_{case} = 25\text{ °C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CER}$	Collector Cut-off Current ( $R_{BE} = 5\ \Omega$ )	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV}$ $T_j = 100\text{ °C}$			0.4 2	mA mA
$I_{CEV}$	Collector Cut-off Current ( $V_{BE} = -5V$ )	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV}$ $T_j = 100\text{ °C}$			0.4 2	mA mA
$I_{EBO}$	Emitter Cut-off Current ( $I_C = 0$ )	$V_{EB} = 5\text{ V}$			2	mA
$V_{CEO(SUS)*}$	Collector-Emitter Sustaining Voltage	$I_C = 0.1\text{ A}$ $L = 25\text{ mH}$ $V_{clamp} = 700\text{ V}$	700			V
$h_{FE*}$	DC Current Gain	$I_C = 24\text{ A}$ $V_{CE} = 5\text{ V}$		12		
$V_{CE(sat)*}$	Collector-Emitter Saturation Voltage	$I_C = 24\text{ A}$ $I_B = 6\text{ A}$ $I_C = 24\text{ A}$ $I_B = 6\text{ A}$ $T_j = 100\text{ °C}$		0.3 0.6	1.2 2	V V
$V_{BE(sat)*}$	Base-Emitter Saturation Voltage	$I_C = 24\text{ A}$ $I_B = 6\text{ A}$ $I_C = 24\text{ A}$ $I_B = 6\text{ A}$ $T_j = 100\text{ °C}$		1 0.9	1.7 1.7	V V
$di_C/dt$	Rate of Rise of On-state Collector	$V_{CC} = V$ $R_C = 0$ $t_p = \mu s$ $I_{B1} = A$ $T_j = 100\text{ °C}$				A/ $\mu s$
$V_{CE(3\ \mu s)}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 300\text{ V}$ $R_C = 9.3\ \Omega$ $I_{B1} = 7.2\text{ A}$ $T_j = 100\text{ °C}$		4.5	8	V
$V_{CE(5\ \mu s)}$	Collector-Emitter Dynamic Voltage	$V_{CC} = 300\text{ V}$ $R_C = 9.3\ \Omega$ $I_{B1} = 7.2\text{ A}$ $T_j = 100\text{ °C}$		2.5	4	V
$t_s$ $t_f$ $t_c$	Storage Time Fall Time Cross-over Time	$I_C = 24\text{ A}$ $V_{CC} = 250\text{ V}$ $V_{BB} = -5\text{ V}$ $R_{BB} = 0.39\ \Omega$ $V_{clamp} = 700\text{ V}$ $I_{B1} = 6\text{ A}$ $L = 78\ \mu H$ $T_j = 100\text{ °C}$		3 0.33 0.6	6 0.6 0.8	$\mu s$ $\mu s$ $\mu s$
$V_{CEW}$	Maximum Collector Emitter Voltage Without Snubber	$I_{C\text{Woff}} = A$ $I_{B1} = A$ $V_{BB} = -5\text{ V}$ $V_{CC} = V$ $L = \mu H$ $R_{BB} = \Omega$ $T_j = 125\text{ °C}$				V

\* Pulsed: Pulse duration = 300  $\mu s$ , duty cycle 1.5 %

ISOTOP MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	11.8		12.2	0.466		0.480
B	8.9		9.1	0.350		0.358
C	1.95		2.05	0.076		0.080
D	0.75		0.85	0.029		0.033
E	12.6		12.8	0.496		0.503
F	25.15		25.5	0.990		1.003
G	31.5		31.7	1.240		1.248
H	4			0.157		
J	4.1		4.3	0.161		0.169
K	14.9		15.1	0.586		0.594
L	30.1		30.3	1.185		1.193
M	37.8		38.2	1.488		1.503
N	4			0.157		
O	7.8		8.2	0.307		0.322
P	5.5			0.216		

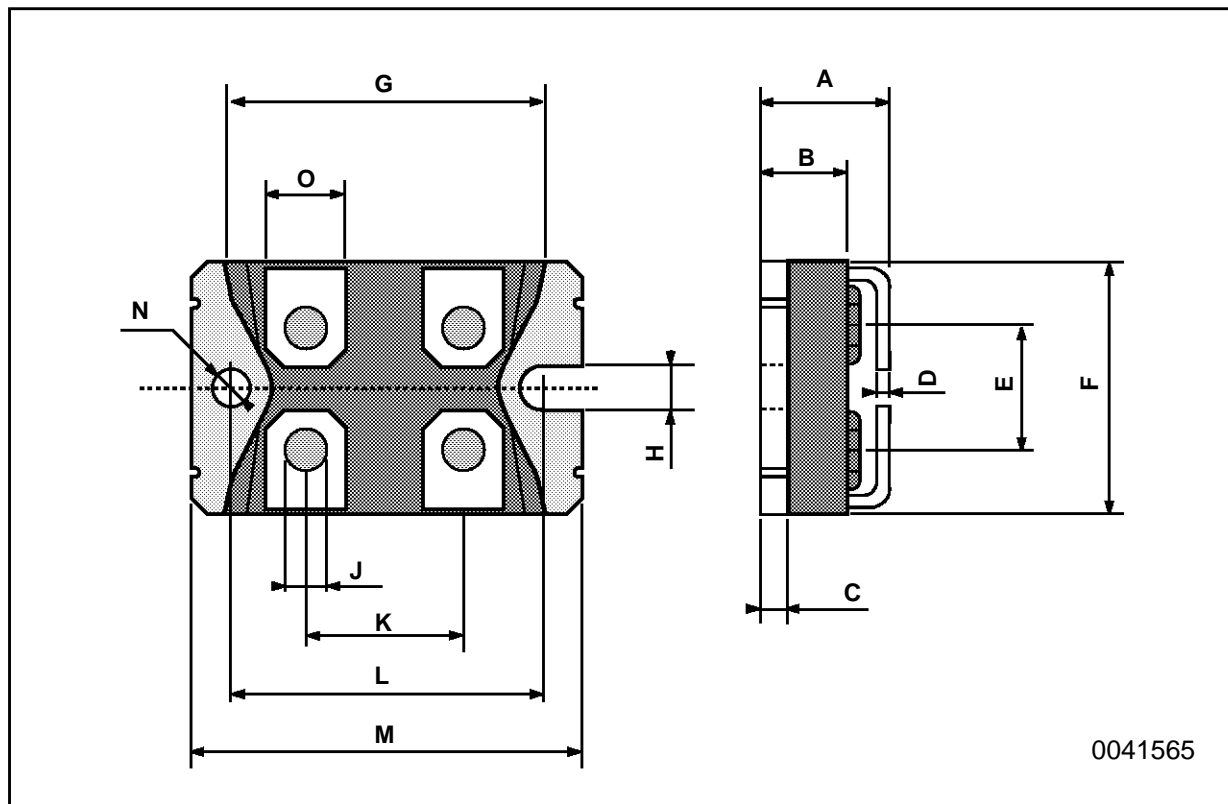

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES  
Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A