


ULTRA FAST RECOVERY RECTIFIER DIODES

- SUITED FOR SMPS
- LOW LOSSES
- LOW FORWARD AND REVERSE RECOVERY TIME
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY

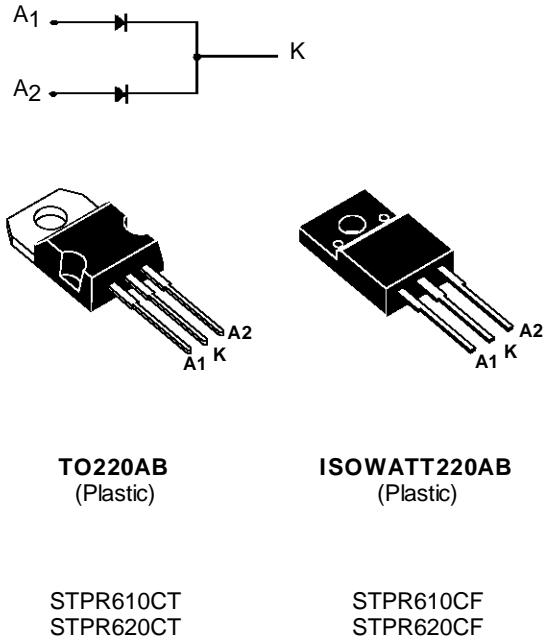

DESCRIPTION

Low cost dual center tap rectifier suited for switch-mode power supply and high frequency DC to DC converters.

Packaged in TO220AB and ISOWATT220AB, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
I _F (RMS)	RMS Forward Current			Per diode	A
I _F (AV)	Average Forward Current $\delta = 0.5$	TO220AB	T _c = 125°C	Per diode	A
		ISOWATT220AB	T _c = 120°C	Per device	
I _{FSM}	Surge Non Repetitive Forward Current		T _p = 10 ms Sinusoidal	Per diode	A
T _{stg} T _j	Storage and Junction Temperature Range			- 65 to + 150 - 65 to + 150	°C

Symbol	Parameter	STPR		Unit
		610CT 610CF	620CT 620CF	
V _{RRM}	Repetitive Peak Reverse Voltage	100	200	V

STPR610CT/CF / STPR620CT/CF

THERMAL RESISTANCE

Symbol	Parameter			Value	Unit
Rth (j-c)	Junction-case	TO220AB	Per diode total	6.5	°C/W
		ISOWATT220AB	Per diode total	8.5	
Rth (c)	Coupling				°C/W

When the diodes 1 and 2 are used simultaneously :

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{\text{th}}(\text{Per diode}) + P(\text{diode 2}) \times R_{\text{th}}(c)$$

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

Symbol	Tests Conditions		Min.	Typ.	Max.	Unit
I _R *	T _j = 25°C	V _R = V _{RRM}			50	μA
	T _j = 100°C				0.5	mA
V _F **	T _j = 125°C	I _F = 3 A			0.99	V
	T _j = 125°C	I _F = 6 A			1.20	
	T _j = 25°C	I _F = 6 A			1.25	

Pulse test : * tp = 5 ms, duty cycle < 2 %
** tp = 380 μs, duty cycle < 2%

RECOVERY CHARACTERISTICS

Symbol	Tests Conditions			Min.	Typ.	Max.	Unit	
trr	T _j = 25°C	I _F = 0.5 A	I _R = 1 A	I _{rr} = 0.25 A			30	ns
tfr	T _j = 25°C	I _F = 1 A	tr = 10 ns	V _{FR} = 1.1 x V _F		20		ns
V _{FP}	T _j = 25°C	I _F = 1 A	tr = 10 ns			3		V

To evaluate the conduction losses use the following equation :

$$P = 0.78 \times I_F(AV) + 0.070 I_F^2(\text{RMS})$$

Fig.1 : Average forward power dissipation versus average forward current. (Per diode)


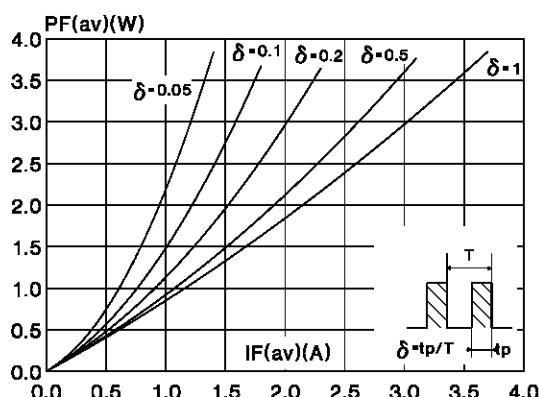


Fig.2 : Peak current versus form factor. (Per diode)

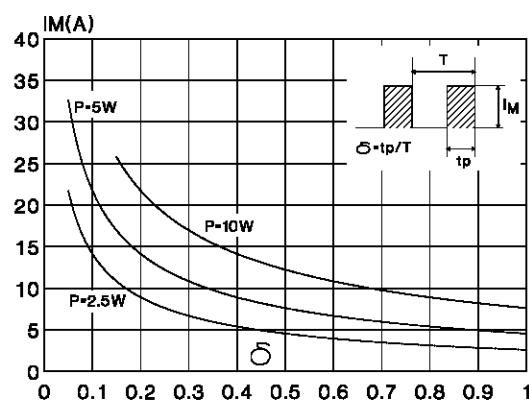

STPR610CT/CF / STPR620CT/CF

Fig.3 : Average current versus ambient temperature.
(duty cycle : 0.5) (TO220AB)

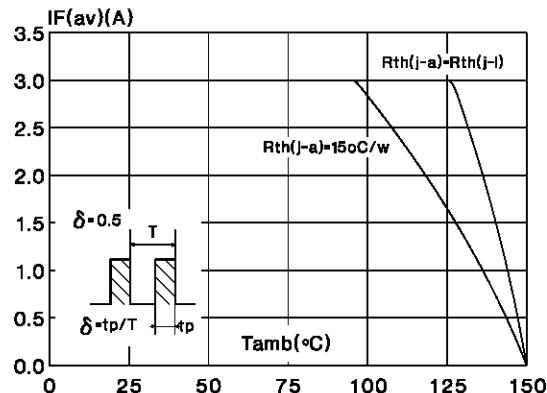


Fig.5 : Non repetitive surge peak forward current versus overload duration.
(Maximum values) (TO220AB) (Per diode)

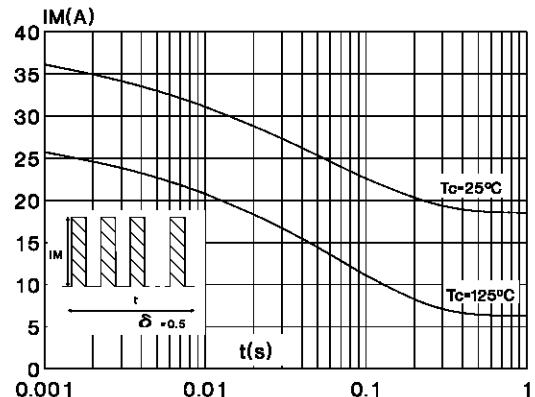


Fig.7 : Relative variation of thermal transient impedance junction to case versus pulse duration.
(TO220AB) (Per diode)

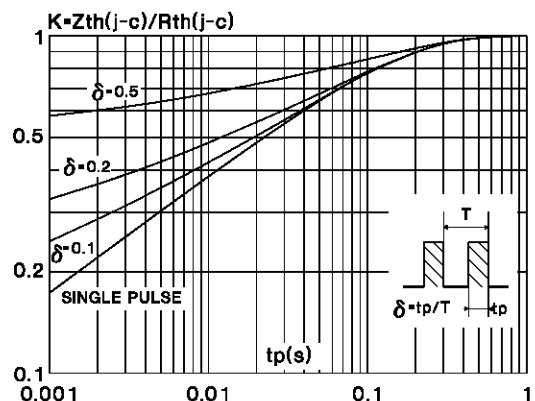


Fig.4 : Average current versus ambient temperature.
(duty cycle : 0.5) (ISOWATT220AB)

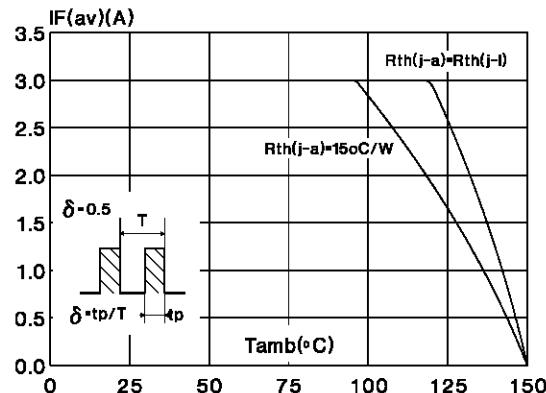


Fig.6 : Non repetitive surge peak forward current versus overload duration.
(Maximum values) (ISOWATT220AB) (Per diode)


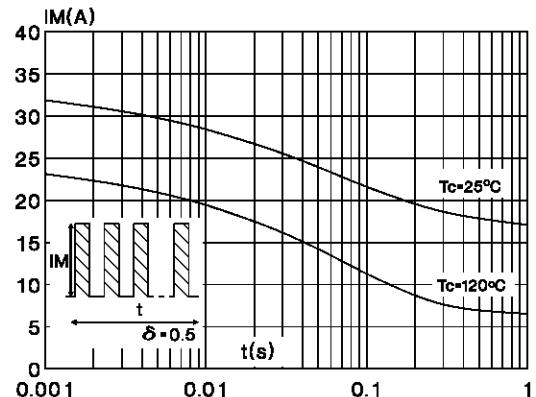


Fig.8 : Relative variation of thermal transient impedance junction to case versus pulse duration.
(ISOWATT220AB) (Per diode)

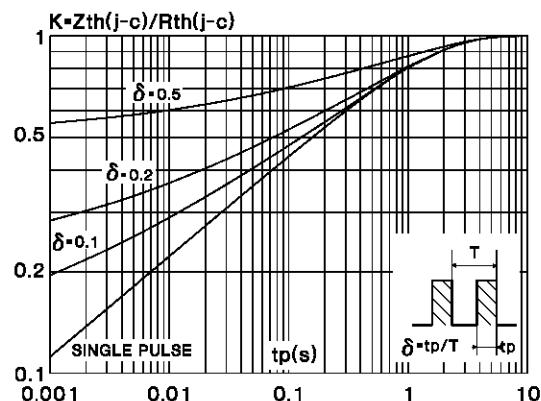

STPR610CT/CF / STPR620CT/CF

Fig.9 : Forward voltage drop versus forward current.
(Maximum values) (Per diode)

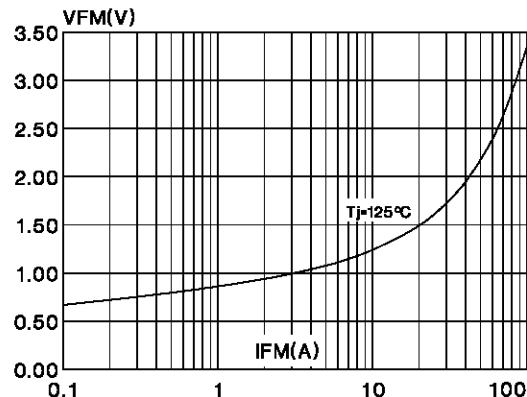


Fig.11 : Recovery charge versus dI/F/dt. (Per diode)

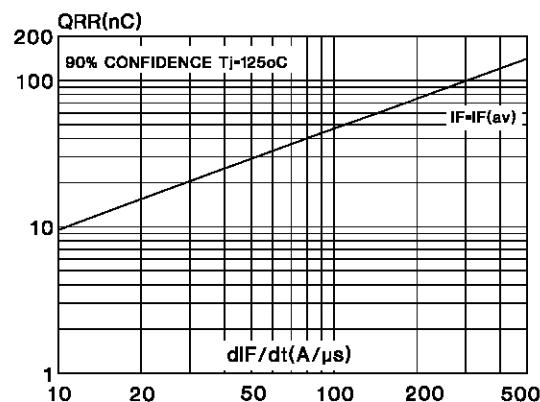


Fig.13 : Dynamic parameters versus junction temperature. (Per diode)

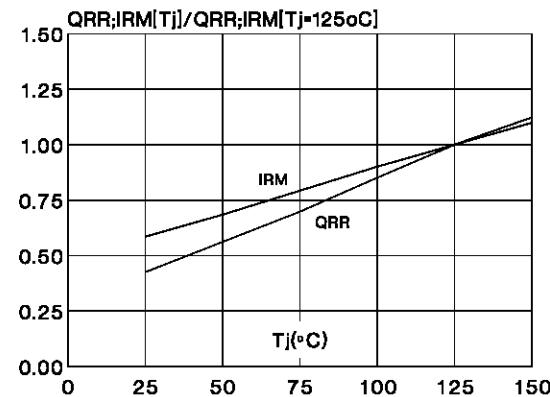


Fig.10 : Junction capacitance versus reverse voltage applied. (Typical values) (Per diode)


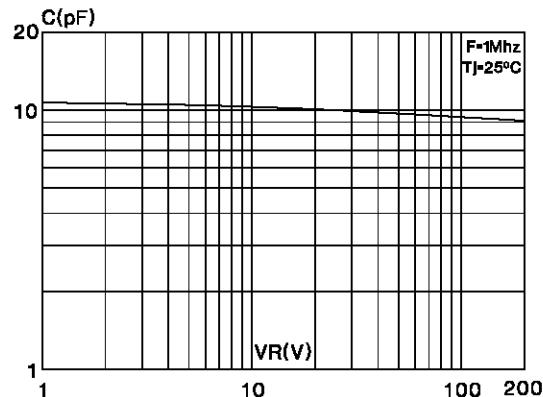


Fig.12 : Peak reverse current versus dI/F/dt. (Per diode)

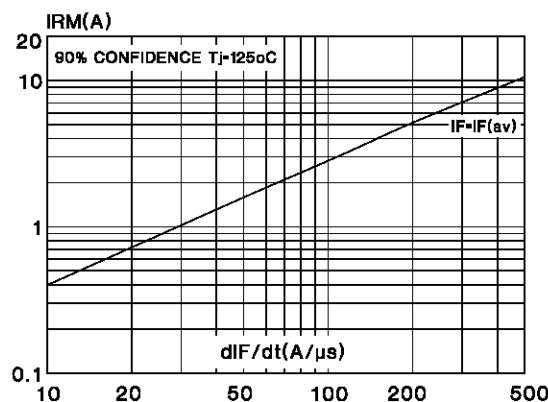

PACKAGE MECHANICAL DATA
TO220AB (JEDEC outline)

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	10.0	10.4	0.393	0.409
B	15.2	15.9	0.598	0.626
C	13	14	0.511	0.551
D	6.2	6.6	0.244	0.260
E	16.4 typ.		0.645 typ.	
F	3.5	4.2	0.137	0.165
G	2.65	2.95	0.104	0.116
H	4.4	4.6	0.173	0.181
I	3.75	3.85	0.147	0.151
J	1.23	1.32	0.048	0.051
K	1.27 typ.		0.050 typ.	
L	0.49	0.70	0.019	0.027
M	2.4	2.72	0.094	0.107
N	4.95	5.15	0.194	0.203
N1	2.40	2.70	0.094	0.106
O	1.14	1.70	0.044	0.067
P	0.61	0.88	0.024	0.034

Cooling method : C

Marking : Type number

Weight : 2 g

Recommended torque value : 0.55m.N

Maximum torque value : 0.7m.N

PACKAGE MECHANICAL DATA
ISOWATT220AB (JEDEC outline)

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	10	10.4	0.393	0.409
B	15.9	16.4	0.626	0.645
B1	9.8	10.6	0.385	0.417
C	28.6	30.6	1.126	1.204
D	16 typ		0.630 typ	
E	9	9.3	0.354	0.366
H	4.4	4.6	0.173	0.181
I	3	3.2	0.118	0.126
J	2.5	2.7	0.098	0.106
L	0.4	0.7	0.015	0.027
M	2.5	2.75	0.098	0.108
N	4.95	5.2	0.195	0.204
N1	2.4	2.7	0.094	0.106
O	1.15	1.7	0.045	0.067
P	0.75	1	0.030	0.039

CCooling method : C

Marking : Type number

Weight : 2.1 g

Recommended torque value : 0.55m.N

Maximum torque value : 0.70m.N

Electrical isolation : 2000V DC

Capacitance : 12pF

STPR610CT/CF / STPR620CT/CF

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

TURBOSWITCH, TRANSIL, TRISIL, SNUBBERLESS are Trademarks of SGS-THOMSON Microelectronics.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A