





**LCC Pin Connections**

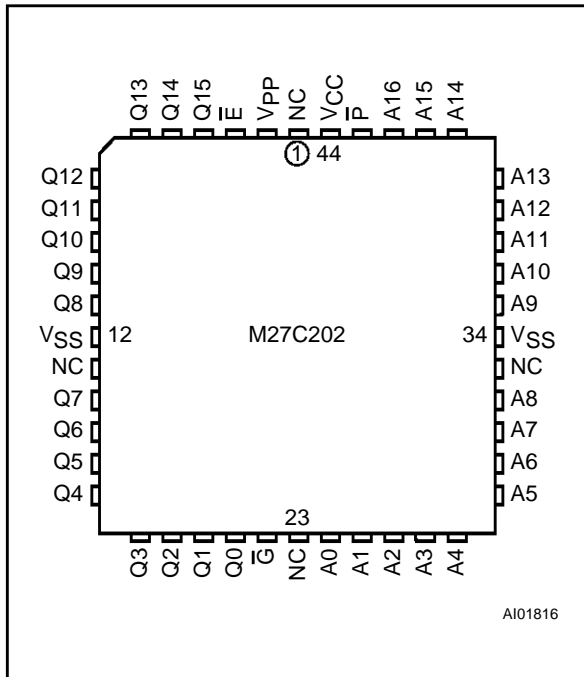

**Warning:** NC = Not Connected.

**TSOP Pin Connections**

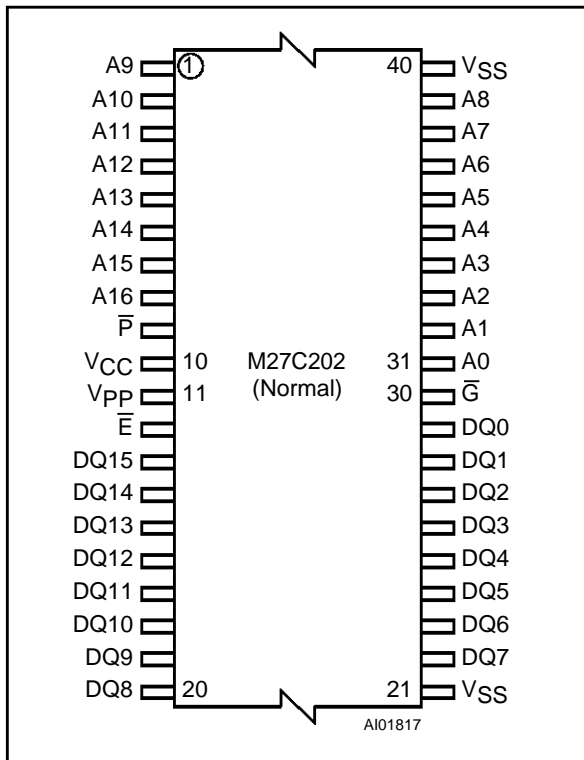

**Signal Names**

A0 - A16	Address Inputs
Q0 - Q15	Data Outputs
$\bar{E}$	Chip Enable
$\bar{G}$	Output Enable
$\bar{P}$	Program
V <sub>PP</sub>	Program Supply
V <sub>CC</sub>	Supply Voltage
V <sub>SS</sub>	Ground

**Ordering Information Scheme**

For a list of available options refer to the current Memory Shortform catalogue.

For further information on any aspect of this device, please contact the SGS-THOMSON Sales Office nearest to you.

Example: M27C202 -12 K 1 TR

<b>Speed</b>	-12
-55	55ns
-70	70ns
-80	80ns
-90	90ns
-10	100ns
-12	120ns
-15	150ns
-20	200ns
<b>Package</b>	K
K	PLCC44
N	TSOP40 10 x 20mm
<b>Temp. Range</b>	1
1	0 to 70 °C
3	-40 to 125 °C
6	-40 to 85 °C
<b>Option</b>	TR
TR	Tape & Reel Packing