


## MECHANICAL DATA

Dimensions in mm (inches)

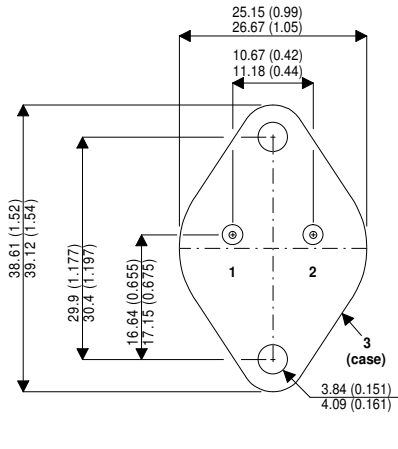

## HIGH CURRENT NPN SILICON TRANSISTOR

### FEATURES

- HIGH CURRENT FAST SWITCHING
- HIGH RELIABILITY
- SCREENING OPTIONS AVAILABLE

### APPLICATIONS

- SWITCHING CIRCUITS
- LARGE SIGNAL/POWER AMPLIFIERS

### TO3 (TO204AA)

Pin 1 = Base      Pin 2 = Emitter      Case = Collector

### ABSOLUTE MAXIMUM RATINGS

$T_{CASE} = 25^{\circ}C$  unless otherwise stated

$V_{CBO}$	Collector - Base Voltage	200V
$V_{CEO}$	Collector - Emitter Voltage	140V
$V_{EBO}$	Emitter - Base Voltage	10V
$I_C$	Continuous Collector Current	6A
$I_B$	Base Current	3A
$P_{tot}$	Total Power Dissipation at $T_{case} = 25^{\circ}C$ Derate above $25^{\circ}C$	50W 0.29 W/ $^{\circ}C$
$T_J$	Junction Temperature	$200^{\circ}C$
$T_{stg}$	Storage Temperature	-65 to $200^{\circ}C$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

**THERMAL CHARACTERISTICS**

		<b>Max</b>	<b>Unit</b>
$R_{th(j-case)}$	Thermal resistance to case	3.5	$^{\circ}C/W$

**ELECTRICAL CHARACTERISTICS** ( $T_{case}=25^{\circ}C$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{CEO}$	Collector Cut-Off Current $V_{CE} = 140V$ $I_B = 0$			1.0	mA
$I_{CES}$	Collector Cut-Off Current $V_{CE} = 180V$ $V_{BE} = 0$			1.0	
$I_{EBO}$	Emitter Cut-Off Current $V_{EB} = 10V$ $I_C = 0$			1.0	
$V_{(BR)CEO}^*$	Collector-Emitter Breakdown Voltage $I_C = 50mA$ $I_B = 0$	140			V
$V_{(BR)CBO}^*$	Collector-Base Breakdown Voltage $I_C = 3mA$	200			
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage $I_C = 2.0A$ $I_B = 0.25A$			0.6	
$V_{BE(sat)}^*$	Base-Emitter Saturation Voltage $I_C = 2.0A$ $I_B = 0.25A$			1.2	
$h_{FE}^*$	Forward-current transfer ratio	$I_C = 1.0A$ $V_{CE} = 4.0V$		65	
		$I_C = 2.0A$ $V_{CE} = 4.0V$	30	45	

**DYNAMIC CHARACTERISTICS**

$C_{obo}$	Output Capacitance	$I_E = 0$ $f = 1.0MHz$	$V_{CB} = 10V$		65	120	$\mu F$
$F_T$	Transition Frequency	$I_C = 0.5A$ $f = 10.0MHz$	$V_{CE} = 15V$	10			MHz
$T_{on}$	Turn-on time	$I_C = 5.0A$	$I_{B1} = 1.0A$		0.3	0.5	$\mu s$
$T_{off}$	Turn-off time	$I_C = 5.0A$	$I_{B1} = -I_{B2} = 1.0A$		1.5	2.0	

\* Pulse test  $t_p = 300\mu s$ ,  $\delta < 2\%$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.