

PQ20VZ51 PQ20VZ11 PQ20VZ1 1

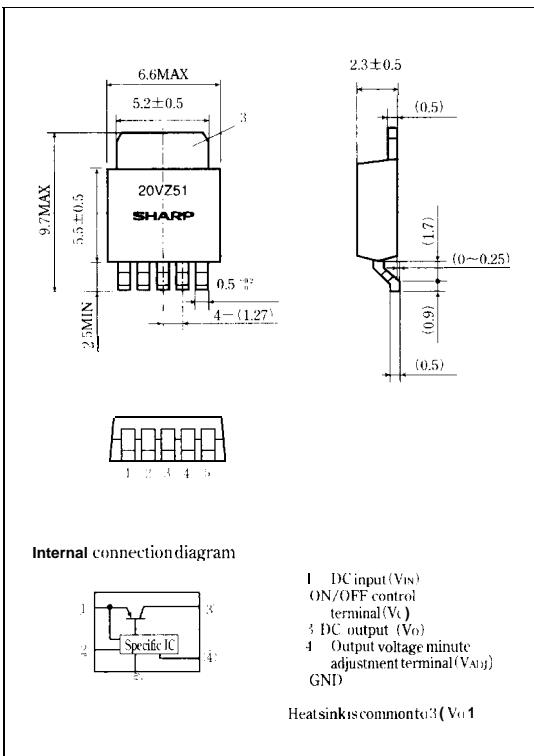
Variable output, Surface Mount Type Low Power-Loss Voltage Regulators

■ Features

- Low power-loss (Dropout voltage : 0.5V)
- Compact surface mount package
- Both the 0.5A output PQ20VZ51 and the 1A output PQ20VZ1 1 have high-precision outputs (Reference voltage precision : ± 2.070)
- Variable output type (Output voltage variable range : 1.5V to 20V)
- Built-in ON-OFF control function
- Low dissipation current at OFF-state (I_{qs} : MAX.5 μ A)
- Tape packaged type is available.
($\phi 330$ mm reel : 3 000pcs., PQ20VZ5U/PQ20VZ1 U)

■ Outline Dimensions

(Unit : mm)



Absolute Maximum Ratings

(T_a=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V _{IN}	24	V
*1 Output control voltage	V _C	24	V
*1 Output adjustment terminal Voltage	V _{ADJ}	7	V
Output current	PQ20VZ51	0.5	A
	PQ20VZ11	1	
Power dissipation (With infinite heat sink)	P _H	8	W
*2 Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-20 to +80	°C
Storage temperature	T _{stg}	-40 to +150	°C
*3 Soldering temperature	T _{sot}	260 (For 10s)	°C

*1 All are open except GND and applicable terminals.

*2 Overheat protection may operate at 125°C \leq T \leq 150°C

*3 For 10s

Please refer to the chapter 'Handling Precautions'.

SHARP

"In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP device"

■ Electrical Characteristics

Unless otherwise specified, $V_{IN}=12V$, $V_o=10V$, $R_1=1k\Omega$, $V_c=2.7V$ ($T_a=25^\circ C$)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	$V_o=1.5V$	4.5			v
Output voltage	V_o	$R_2=225\Omega$ to $14.6k\Omega$	1.5		20	v
Load regulation	$RegL$	*5		0.2	2.0	%
Line regulation	$RegI$	$V_{IN}=11$ to $21V$, $I_o=5mA$		0.2	2.5	%
Ripple rejection	RR	Refer to Fig. 2	45	60		dB
Reference voltage	V_{ref}	*4	1.225	1.25	1.275	v
Temperature coefficient of reference voltage	$T_{CV_{ref}}$	$T_j=0$ to $125^\circ C$, $I_o=5mA$		± 1.0		%
Dropout voltage	$V_{D(\cdot)}$	*4,*6	—	0.2	0.5	v
Quiescent current	I_q	$I_o=0$		4	7	mA
ON-state voltage for control	$V_{C(ON)}$		2.0			v
ON-state current for control	$I_C(ON)$				200	μA
OFF-state voltage for control	$V_{C(OFF)}$	10=0			0.8	v
OFF-state current for control	$I_C(OFF)$				2.0	μA
Output OFF-state consumption current	I_{qs}	$V_C=0.4V$			5.0	μA

*4 PQ20VZ51 : $I_o=0.3A$, PQ20VZ11 : $I_o=0.5A$ *5 PQ20VZ51 : $I_o=5mA$ to $0.5A$, PQ20VZ11 : $I_o=5mA$ to $1.0A$

*6 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

*7 In case of opening control terminal 2, output voltage turns off.

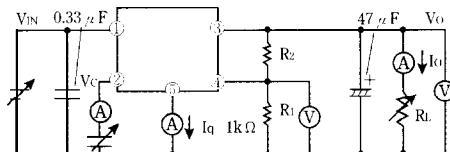Fig. 1 Test Circuit



$$V_o = V_{ref} \times \left(1 + \frac{R_2}{R_1} \right) \approx 1.25 \times \left(1 + \frac{R_2}{R_1} \right)$$

[$R_1=1k\Omega$, $V_{ref}=1.25V$]

Fig. 2 Test Circuit of Ripple Rejection

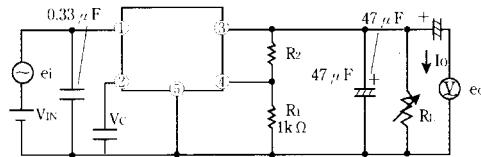
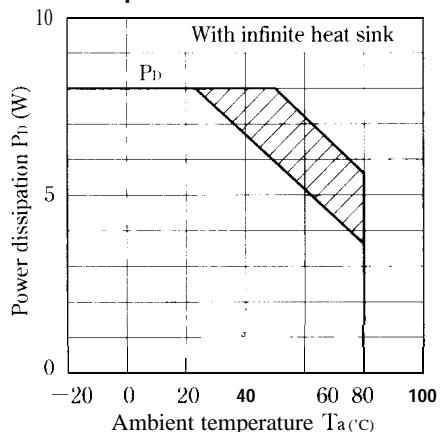
 $f=120Hz$ (sine wave) $e_i=0.5Vrms$ $I_o=0.3A$ $RR=20\log(e_i/e_o)$

Fig. 3 Power Dissipation vs. Ambient Temperature

Note) oblique line portion : overheat protection may operate in this area.

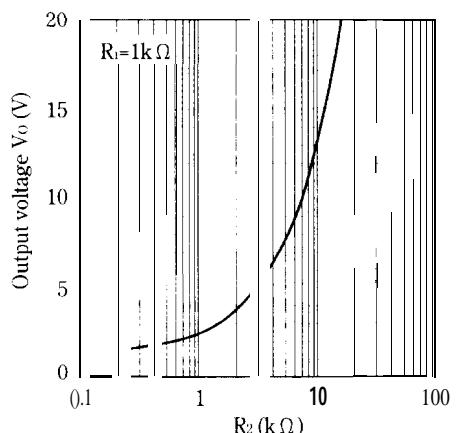
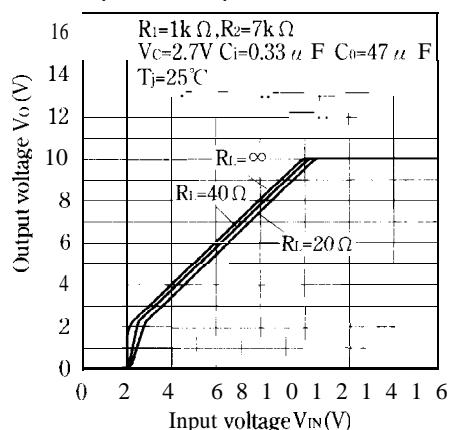
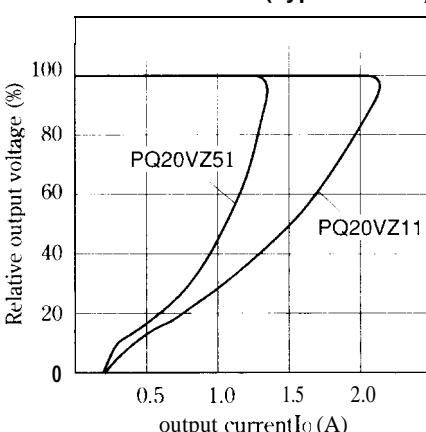
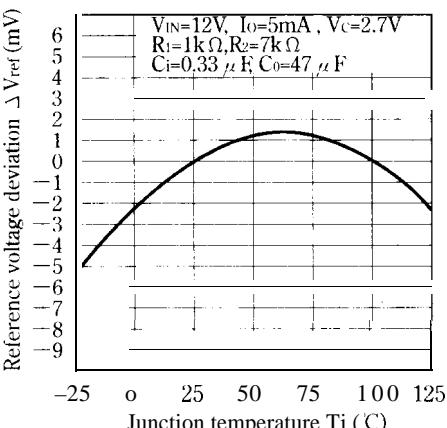
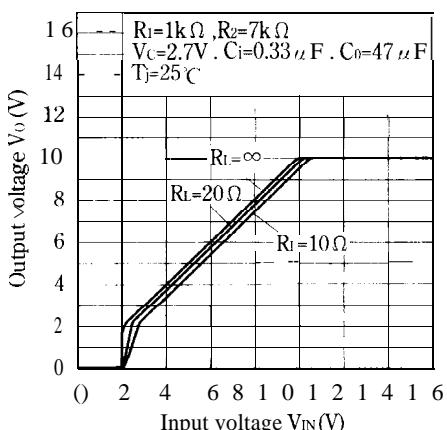
Fig. 5 Output Voltage Adjustment Characteristics**Fig. 7 Output Voltage vs. Input Voltage (PQ20VZ51)****Fig. 4 Overcurrent protection Characteristics (Typical Value)****Fig. 6 Reference Voltage Deviation vs. Junction Temperature****Fig. 8 Output Voltage vs. Input Voltage (PQ20VZ11)**

Fig. 9 Dropout Voltage vs. Junction Temperature (PQ20VZ51)

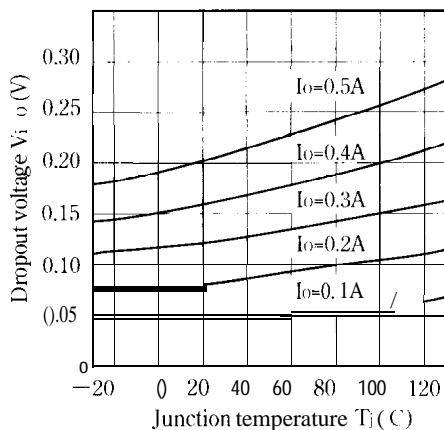


Fig.10 Dropout Voltage vs. Junction Temperature (PQ20VZ11)

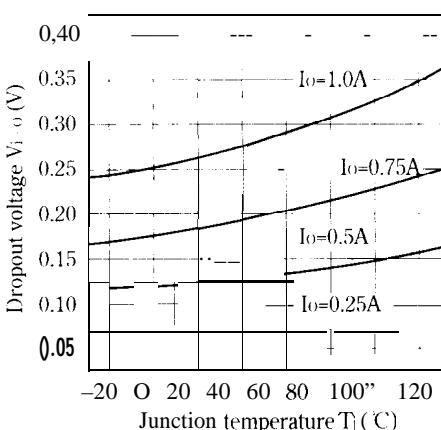


Fig.11 Quiescent Current vs. Junction Temperature

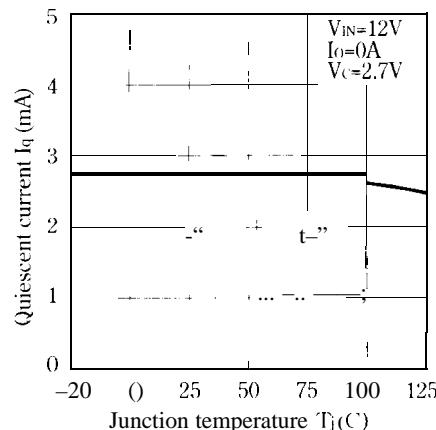


Fig.12 Ripple Rejection vs. Input Ripple Frequency

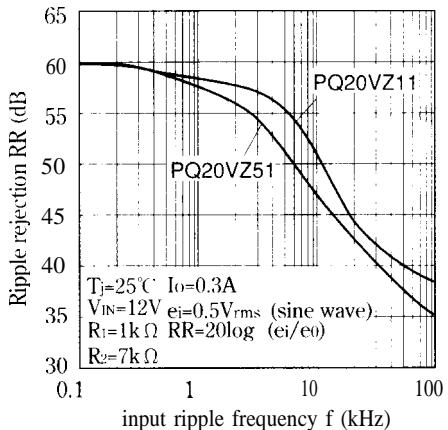


Fig.13 Ripple Rejection vs. Output Current (PQ20VZ51)

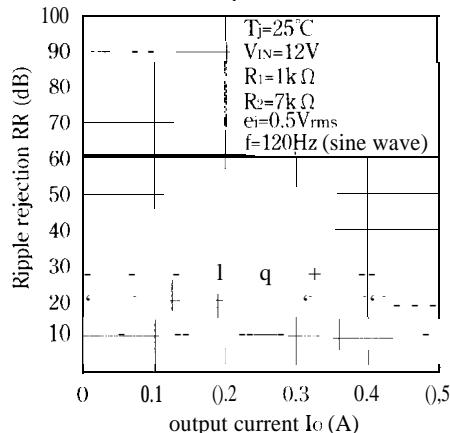


Fig.14 Ripple Rejection vs. Output Current (PQ20VZ11)

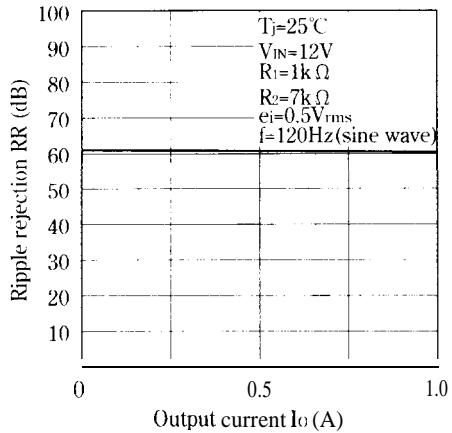


Fig.15 Output Peak Current vs. Dropout Voltage (PQ20VZ51)

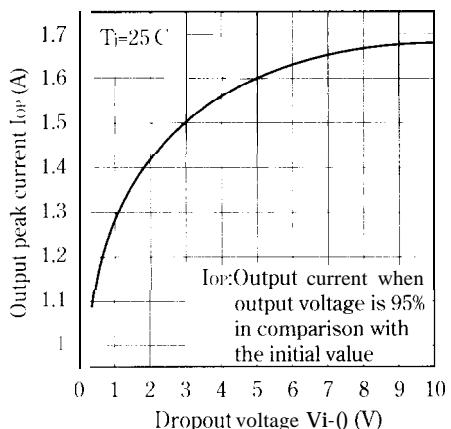


Fig.16 Output Peak Current vs. Dropout Voltage (PQ20VZ11)

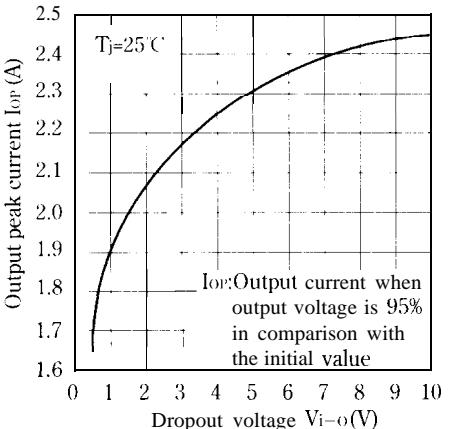


Fig.17 Output Peak Current vs. Junction Temperature (PQ20VZ51)

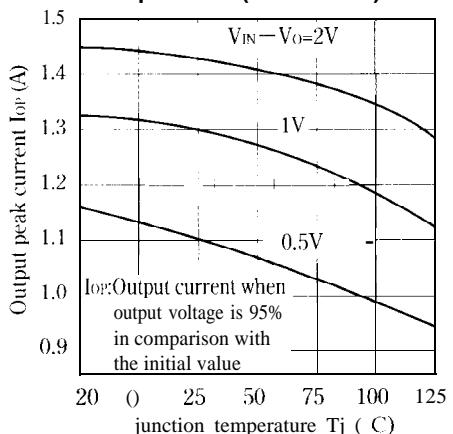


Fig.18 Output Peak Current vs. Junction Temperature (PQ20VZ11)


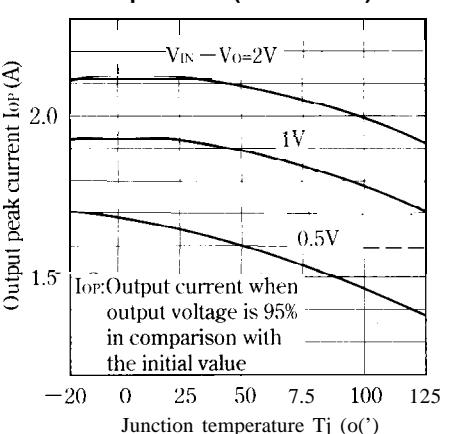




Fig.19 Power Dissipation vs. Ambient Temperature

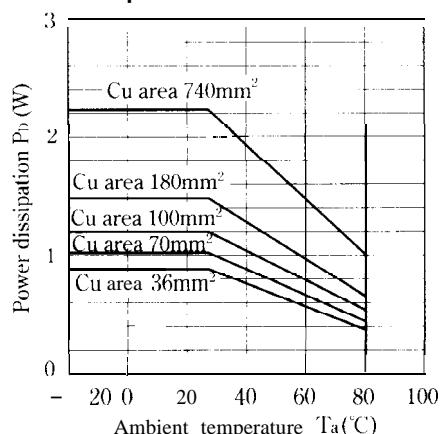

Material : Glass-clothepoxy resin
Size : 50X50" 1.6mm
Cu thickness : 1.5, m


■ Adjustment of Output Voltage

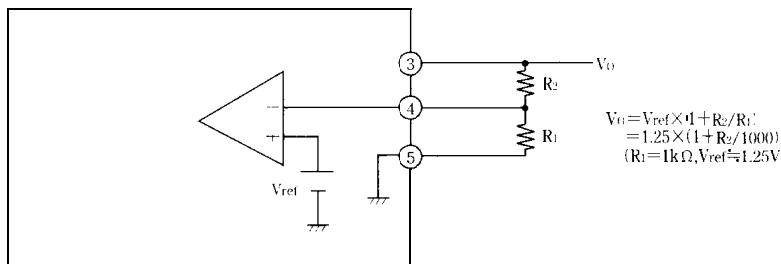Output voltage is able to be set from 1.5V to 20V when resistors R1,R2 are attached to (3), (4), (5) terminals. As for the external resistors to set output voltage, refer to the following figure or Fig.5.



■ ON/OFF Operation

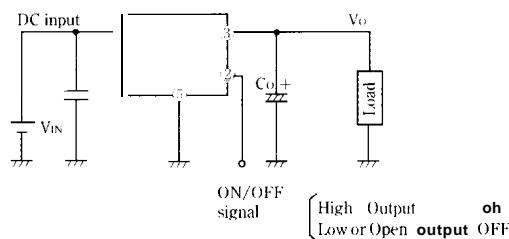As shown in the figure, ON/OFF control function is available.



■ Model Line-ups for Tape-packaged Products

	Sleeve-packaged products		'Tape-packaged' products	
output current	Standard type	High-precision output type	Standard type	High-precision output type
0.5A output		PQ20VZ51		PQ20VZ5U
1.0A output		PQ20VZ11		PQ20VZ1 U